


# BC01

## BC01 Bluetooth Car Charger

### Introduction

Thanks for selecting our product. Bluetooth car charger BC01, which combine with Bluetooth headset, car charger and emergency hammer function together, is an unprecedented product. This product have been developed for answer the phone while driving without affected.

### Product illustration:

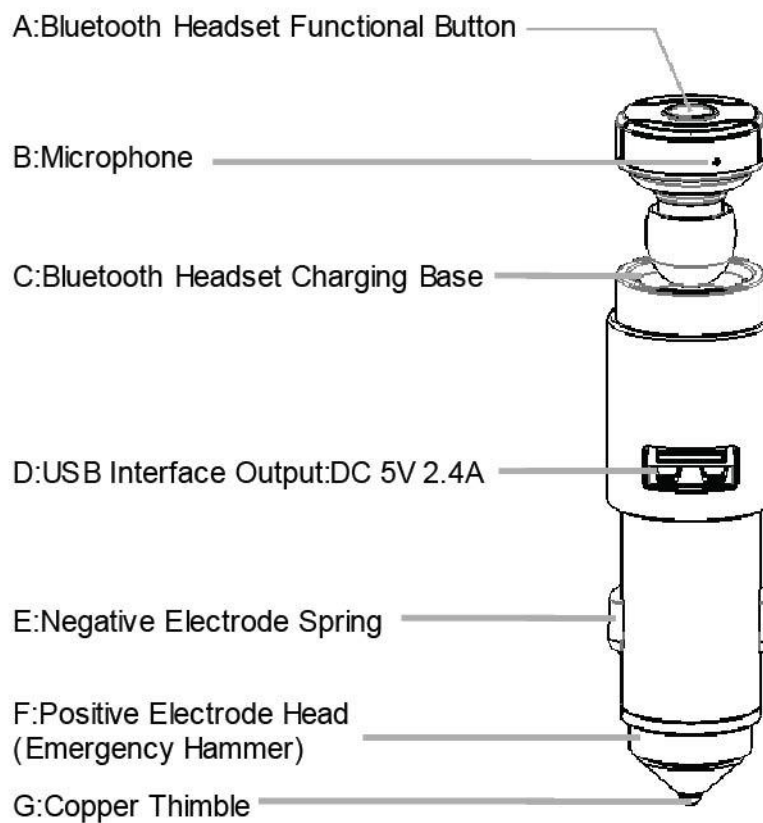

A. Bluetooth Headset MFB

B. Microphone

C. Bluetooth Headset Charging Base

C. USB Output Interface: DC 5V 2.4A

E. Negative Electrode Spring

F:positive Electrode Head (emergency hammer)

G:Copper Thimble

#### **Specification:**

Model No:BC01

Input:DC 12-24V

Output:DC 5V/2.4A

Bluetooth Version:4.1

Pairing Name:BC01

Profile Supported:HSP,A2DP,AVRCP

Battery Specification:40mAh

Talk Time:About 2.5 Hours

Stand-by Time:≥40 Hours

Product Size:Φ 24.5X85mm    Headset Size:Φ 21.5X23.5mm


N.W.:40g

#### **How to use:**

Put this product insert into the car cigarette lighter,when the car starts, the car will automatically charge the Bluetooth headset.

#### **A: Charging for Mobile and other digital products**

Put this product insert into the car cigarette lighter,use USB cable connect this product with mobile or other digital products. This product compatible with 99% of digital products. It automatically adjusts output power for different devices. The maximum output is 2.4A.

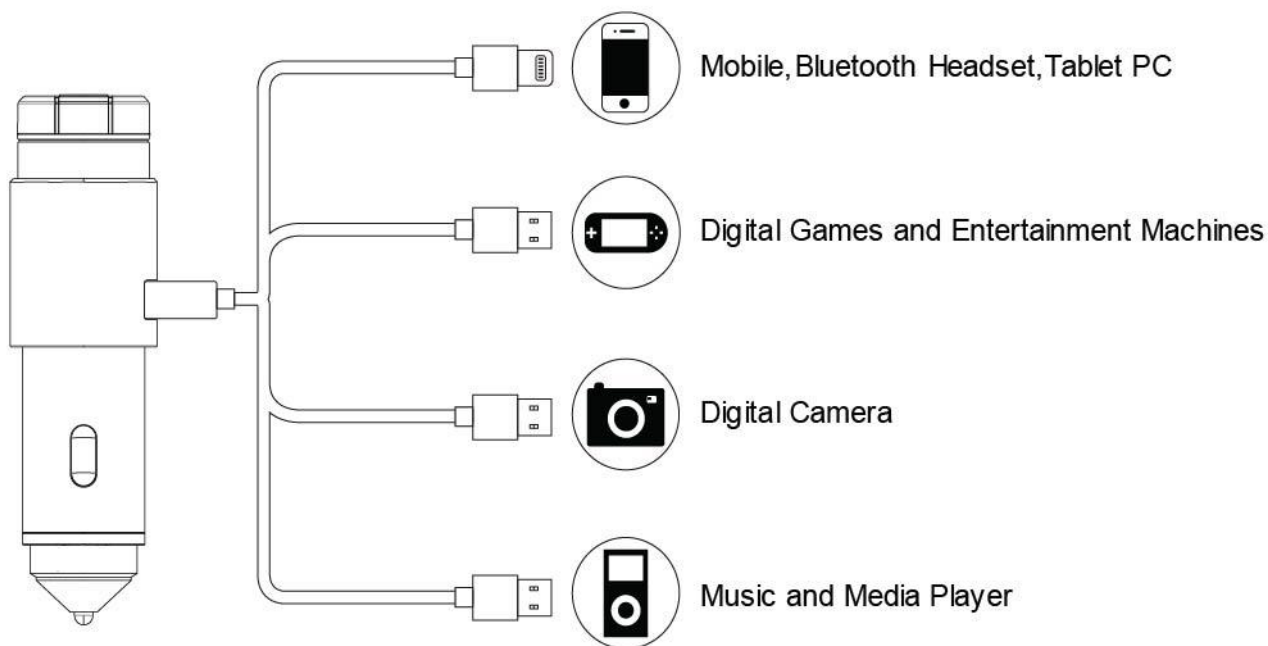

Mobile,Bluetooth headset,iPad,PC etc.

Digital games and entertainment machine

Digital camera

Music and media player

#### B. Bluetooth headset function instructions:

Function	Operation	LED status	prompt tone	Description
Turn on	Long press MFB for 3 seconds	Green light will quick flash twice,then flash one times in every 5 seconds	Power on +Broadcast the battery status	Turn on,green light quick flash,will flash one time in every 5 seconds in one minute,it will automatically turn off if without any operation
Turn off	Long press MFB for 3 seconds	White light flash 4 times	Power off	It get into turn off state,no light on.
Beyond the Bluetooth	Bluetooth is too far away from the	Green light quick flash,then flash	"DUDU"	After green light quick flash one minute,it will flash one time in every 5 seconds , then it will automatically turn off if without any operation

range-Disconnected	phone	one time in every 5 seconds in one minute		
Pairing Mode	Long press MFB for 4 seconds	White and green light flash alternately	Power on +/Pairing+Broadcast the battery status	White and green light flash alternately,it will turn off automatically if without any operation in 5 minutes
Headset connected	Headset automatically connected or mobile connected	8Green light flash twice in every 8 seconds in music time,green light flash one times in every 8 seconds in stand-by time	Device connected	It will automatically connect with the last connected mobile when turn on the headset
Headset disconnected	Headset and mobile disconnect Normally		Device disconnect	It will automatically turn off if without any operation in 10 minutes
Answer call	Pick up the headset from car charger, It will automatically answer the incoming call	White and green light will flash three times in every 3 seconds	Caller ID Broadcast+"DUDU, DUDU"	You can hear an incoming call broadcast from the headset and see it from mobile.Pick up the headset from the car charger,it will automatically answer the call,then put back to charging base for hang up .
Answer the call when using the headset separately	During an incoming call,light touch MFB to answer	White and green light flash three times in every 3 seconds	Caller ID Broadcast+"DUDU, DUDU"	You can hear an incoming call broadcast from the headset and see it from mobile. Light touch MFB to answer the call.(Part of the phone built-in buzzer sound)
Reject Call	Long press MFB for 3 seconds to reject the	Green light flash one times	DU	Long Press MFB for 3 seconds to reject the incoming call

	incoming call			
Call Mute	During a call,double click MFB to realize the mute mode		"DUDU" start and close the mute mode,"WUWU" prompt tone in every 3 seconds during mute mode.	Block the microphone: repeat this operation to cancel
Switch Mode	During the talk mode,press MFB for 1 seconds	/	"DUDU"	Headset can switch the sound to mobile or back to the headset
End Call	During a call,light touch MFB one times within one seconds			During a call,light touch MFB one times within one seconds to end the call or using mobile to hang up
Play/Pause	During play time,light touch MFB to play or pause	Green light will flash twice in every 8 seconds/green light will flash twice in every 5 seconds	/	开启/停止播放器时，需轻触多功能键一次。 During Play or pause,light touch MFB one times
Redial	Double click MFB during connected state	/	"DU"	During connected state,double click MFB to redial the last outgoing call.
Low voltage alarm	When voltage is below 3.3V	White light will flash twice continuously in every 20 seconds	Battery Low/ prompt one times in every 20 seconds	Headset still in normal working state
Low voltage-turn off	3.0V When voltage is below 3.0V	White light flash one times and turn off		Headset turn off,no light on
Charging	Put the headset back to the charging base will automatically	White light on	Start to charge/Full charge	。 White light on while charging,green light on when full charge. Charging time:about 2 hours

	charging			
Reject & Hold	During a call, double click MFB till you hear a prompt tone "DU" and release your hand to reject the incoming call and hold the current call.		"DU"	The third-party incoming call will be rejected and hold the current call in mute state, double click to restore the microphone work properly
End & Answer	During a call, click the MFB to end the current call, click again to answer the third-party incoming call		"DU"	The third-party incoming call be answered and end the current call.
Hold & Answer	During a call, long press MFB, you can hear a prompt tone "DU", that means you answer the third-party incoming call and hold the current call.		"DU", "DU" prompt tone will be heard from the remaining call continuously.	The third-party incoming call will be answered and hold the current call. (Repeat this action can switch the call)
Switch Language	During pairing mode, double		English, Chinese	

	click MFB			
--	-----------	--	--	--

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.