



U7-Pro XGS


Antenna Datasheet



- AUT Environment
 - Instrument Information
 - Test Method
- Antenna Performance
 - 2G Antenna
 - 5G Antenna
 - 6G Antenna



AUT Environment

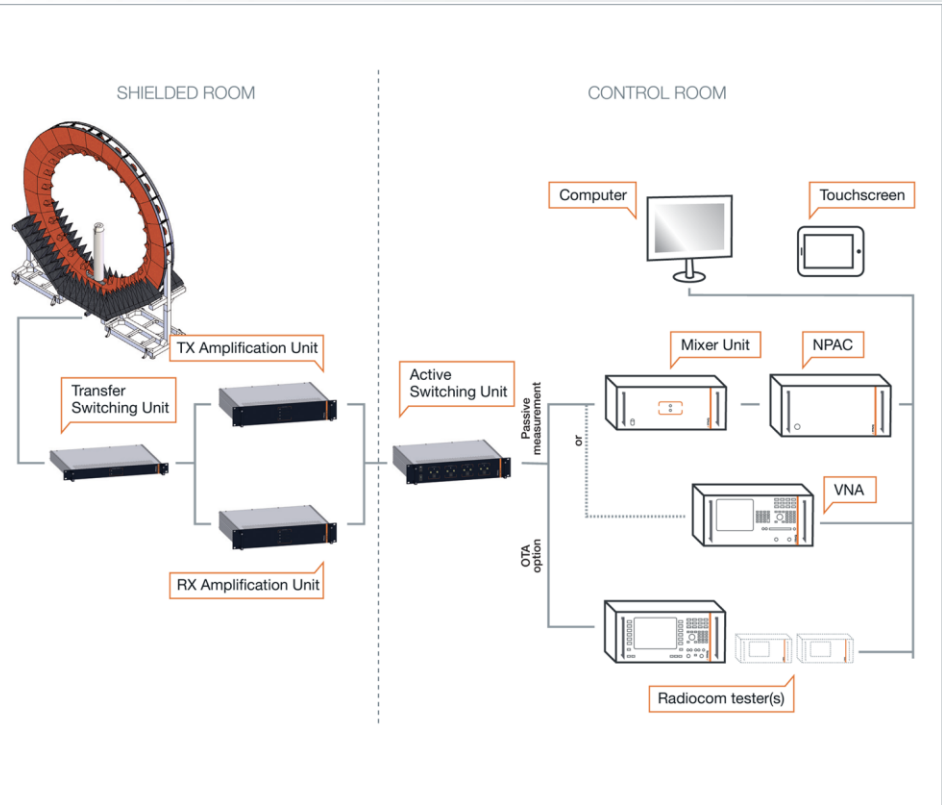


Calibration Record

- Full system calibration, including each instrument, will proceed once per year.


Instrument List	Model	Calibration Date	Calibration Due Date
Transfer Switching	MVG	2024/11/13	2025/11/12
TX Amplification	MVG	2024/11/13	2025/11/12
RX Amplification	MVG	2024/11/13	2025/11/12
Active Switching	MVG	2024/11/13	2025/11/12
Network Analyzer	R&S ZNB	2024/11/13	2025/11/12
Radiocom Tester	Anritsu MT8821	2024/11/13	2025/11/12
Full System	SG24-Standard	2024/11/13	2025/11/12

Test Method

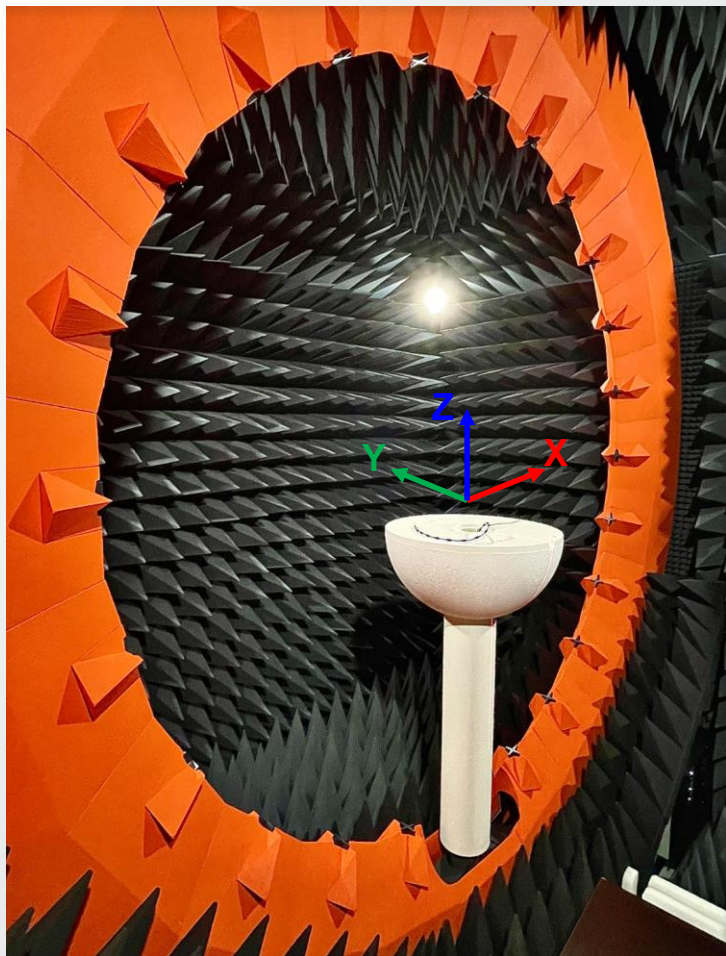

Measurement Standard

- To fix DUT on the turntable and positioning the height level in the center of arch.
- Align the chamber coordinate and UI coordinate.
- Sampling the antenna pattern according to Phi increment 5° / Theta increment 5° .
- Finished 3D data collection along with Theta- $175^\circ \sim \text{Theta} 175^\circ$ and Phi $0^\circ \sim \text{Phi} 180^\circ$
- Frequency resolution setup depends on the different bands.

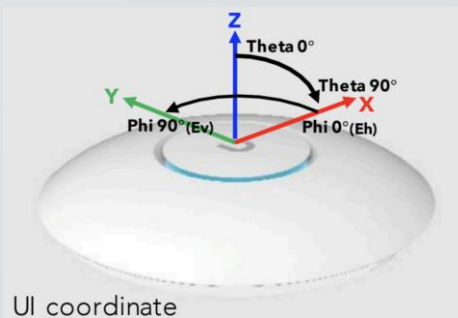





Antenna Performance




[U7-Pro XGS] 2G Antenna Performance

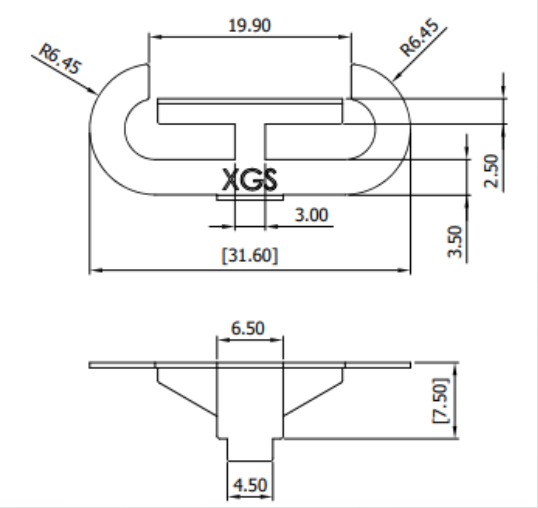
	WIFI 2G
Working frequency	2400-2500 MHz
Antenna type	PIFA Metal Stamping
Gain	4.0 dBi
Model	117-06118
Drawing	

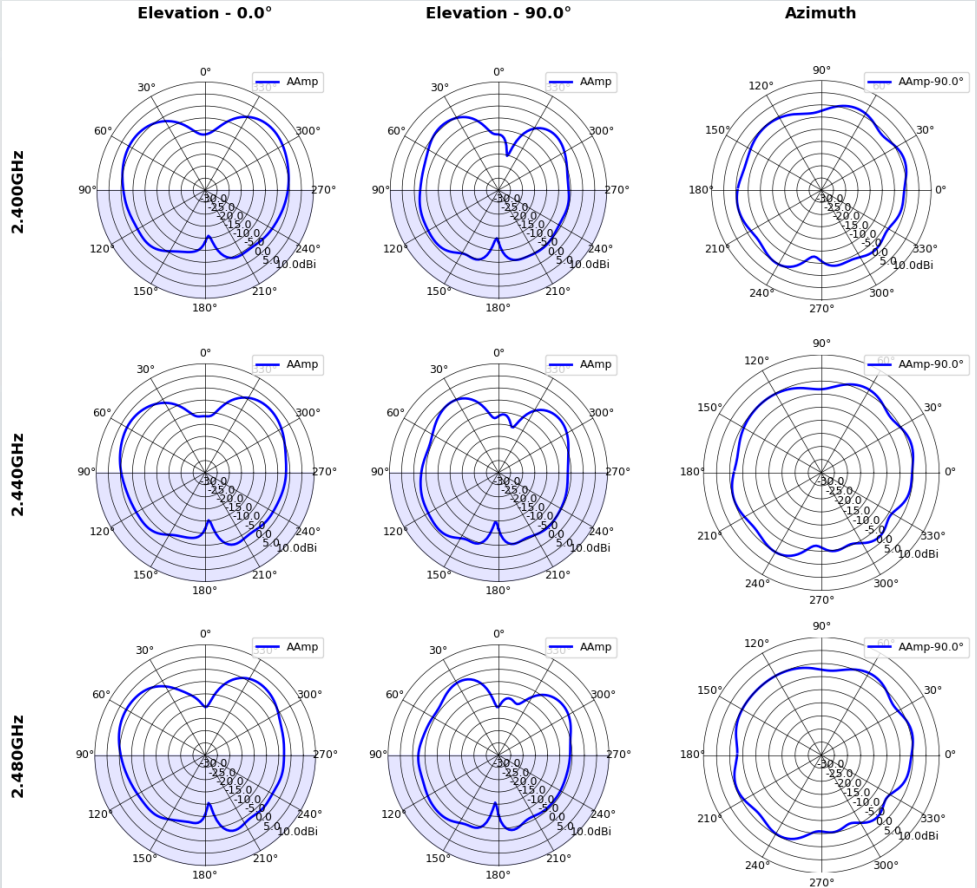

[U7-Pro XGS] 5G Antenna Performance

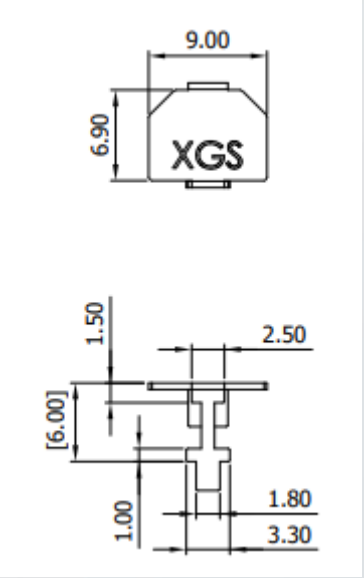



	WIFI 5G
Working frequency	5150-5850 MHz
Antenna type	PIFA Metal Stamping
Gain	6.0 dBi
Model	117-06117
Drawing	

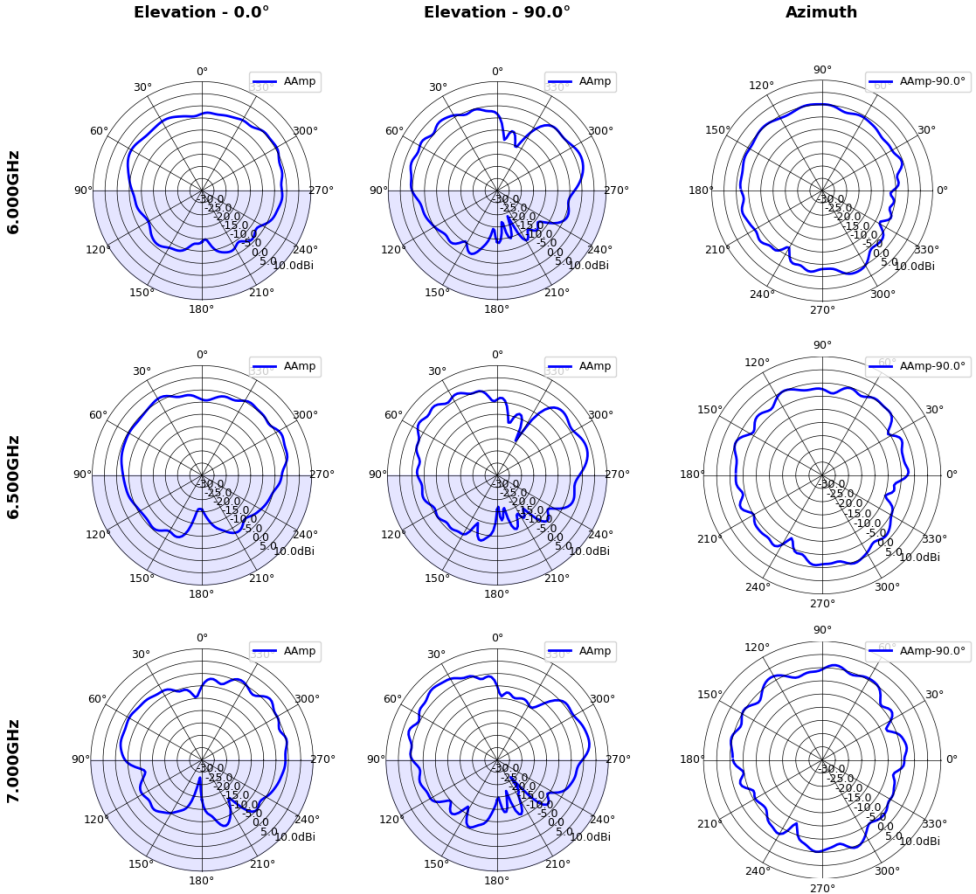

[U7-Pro XGS] 6G Antenna Performance

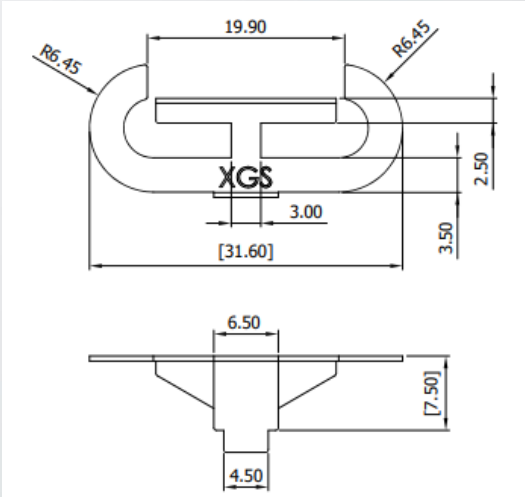

	WIFI 6G
Working frequency	5935-7125 MHz
Antenna type	PIFA Metal Stamping
Gain	6.0 dBi
Model	117-06118
Drawing	

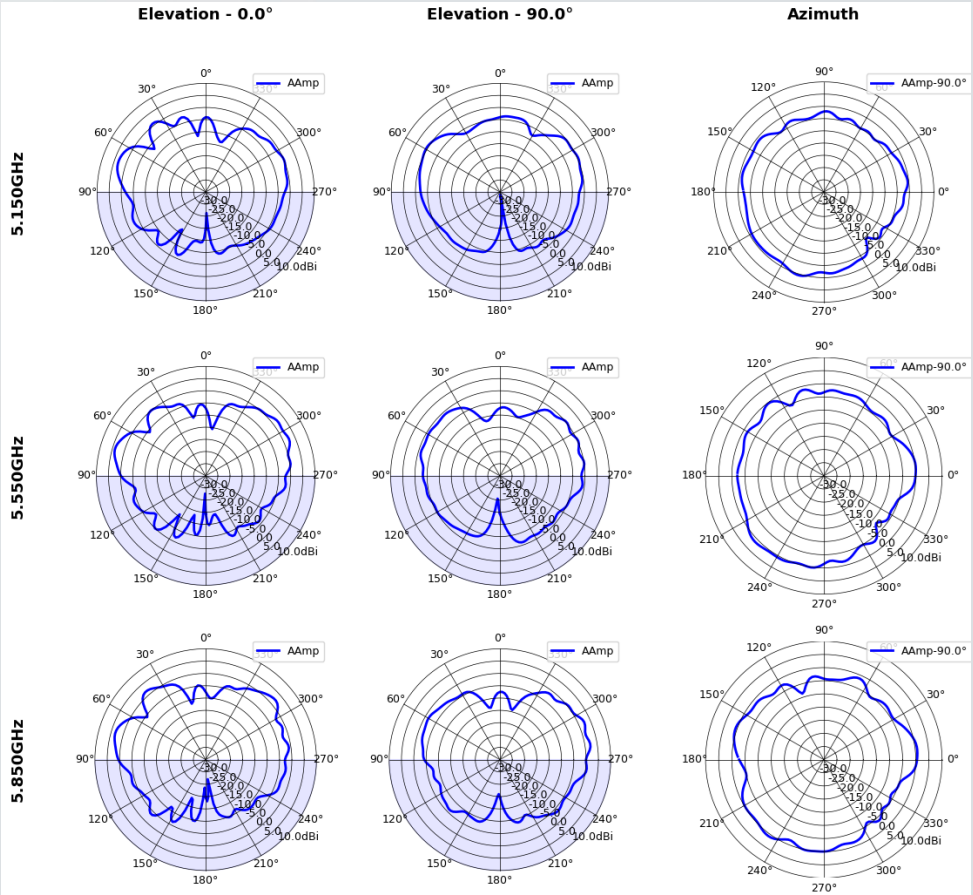



Manufacturer: Ubiquiti Inc.
Address: 685 3rd Avenue Floor New York, NY 10017 United States