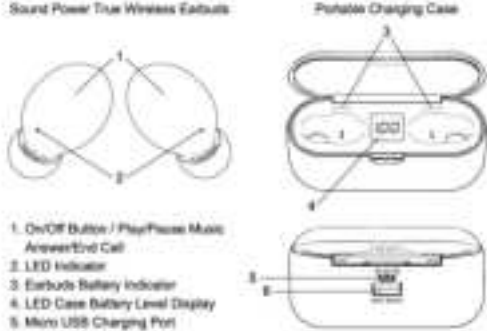



FRONT SIDE

 SOUND POWER TRUE WIRELESS EARBUDS INSTRUCTION MANUAL Thank you for purchasing the Sound Power True Wireless Earbuds. This manual provides more information about the wireless earbuds, please read the instructions before using.	Product Overview Sound Power True Wireless Earbuds Portable Charging Case  1. On/Off Button / Play/Pause Music / Answer/End Call 2. LED Indicator 3. Earbuds Battery Indicator 4. LED Case Battery Level Display 5. Micro USB Charging Port 6. USB Output Port Package Contents 100x1 Pair Earbuds / 1.1in. x 0.7in. x 0.9in. (2.7cm x 1.8cm x 2.2cm) each 100x1 Portable Charging Case 3.7in. x 1.4in. x 1.9in. (9.3cm x 3.5cm x 4.7cm) 100x1 Charging Cable 11.8in. (30cm) 100x1 Instruction Manual Specifications Driver Diameter: 8 mm Impedance: 16 Ohm Frequency Response: 20 Hz - 20 kHz Sensitivity: 98 dB +/- 3 dB Power Supply: Li-Ion Battery 3.7V 30 mAh Per Earbud Playtime: 2-3 Hours (24 Hours with Case) Charging Time: 3-4 Hours Bluetooth Range: 32.8 Feet Charging Case Battery Capacity: 1200 mAh Charging Case with Power Bank Function Micro USB Charging Cable Included	Power On/Off Power On Press and hold down the On/Off Button of earbuds for 3 seconds and the LED will flash. Power Off Press and hold down the On/Off Button of earbuds for 4 seconds and the LED will turn off. Pair the wireless earbuds with your mobile device 1. Keep the distance between the earbuds and mobile device within 32.8 feet. 2. De-activate the Bluetooth function on your mobile device. 3. The protective stickers must be removed from the earbuds and put the earbuds back to charging case before use. Take both earbuds out from charging case and wait for 3 to 5 seconds for auto pairing. The earbud has indicator blinking in blue. Another earbud will be blinking in blue slowly when auto pairing is done successfully. 4. Activate the Bluetooth function on your mobile device and select "SOUND POWER TWS" from the list shown. 5. After pairing is successful, both earbuds will start blinking slowly in blue. If not use for more than 30 seconds, the LED will be off. *Attention: If the auto pairing is not successful, manual pairing between earbuds is essential by following below procedures: 1. Make sure the earbuds are charged. 2. De-activate the Bluetooth function on your mobile device. (If you had been paired the earbuds to some other mobile device(s) nearby, please turn to de-activate those device(s) too). 3. Power on both earbuds simultaneously by pressing the On/Off buttons for 3 seconds and wait for 3 to 5 seconds for auto pairing. (Keep the Bluetooth function off on your mobile device before this operation.) 4. Activate the Bluetooth function on your mobile device and select "SOUND POWER TWS" from the list shown. 5. After pairing successfully, both earbuds will start blinking slowly in blue. If not use for more than 30 seconds, the LED will be off. Reconnect the wireless earbuds to your mobile device When powered on, the wireless earbuds will automatically connect with the last successfully paired device. Disconnect the wireless earbuds from your mobile device Power off the wireless earbuds, or Switch off the Bluetooth on your mobile phone, or Leave the earbuds 80ft away from your mobile phone or further.
---	--	---

BACK SIDE

Answer / Reject a call When receive a call, press the On/Off Button once (on either earbud) to accept the call, or answer the call normally via your mobile phone. Press and hold 3 seconds to reject it. End a call To end the call, just press On/Off button of any side of earbud with sleep sound to end it. Functions Pause / Play Music: Short Press on On/Off Button. Go back to previous song: Double click left On/Off Button. Advance to next song: Double click right On/Off Button. Charging your Earbuds 1. Open the charging case cover. 2. Insert the earbuds into the charging case. 3. The earbuds will start the charge automatically. 4. LED indicator light of the charging case will show the earbuds' battery level. 5. The LED indicator light of the earbud will be turned to Red. 6. Once fully charged, all LEDs will be off. Recharge Charging Case ⚠ For your safety, please always use appropriate 5V output charger/adaptor to charge the product. DO NOT USE Quick Charging USB Adapter to charge the product, as it might damage the product. 1. Use the Micro USB charging cable provided with the packaging. 2. Connect the Micro USB plug to Micro USB charging port on the charging case, then connect the USB plug to a USB port on a computer or wall adapter to begin charging. 3. The last digit of the battery level indicator will be flashing during charge. 4. Once fully charged, the battery level indicator will be stop flash. NOTE: - You must select a qualified charger from a regular manufacturer. - You must charge the charging case and earbuds if it has been not used for more than 6 months. 	Charging Other Device With Charging Case 1. Connect your device to the charging case using your device charging cable (or the supplied micro USB charging cable for Android device (micro USB input device)). 2. Connect the USB plug of the cable to the output port of the charging case. 3. Connect the other end of the cable to the charging port of your device. 4. The Blue LED indicator light will be illuminating while charging your device. 5. The Blue light will be off when charging case capacity is low.  Use the charging case as power bank to charge the mobile phones or other devices. FAQ If the wireless earbuds cannot be paired with your device, please try the following: Ensure that your earbuds are in pairing mode or reconnection mode. Ensure that Bluetooth search function of your mobile device is activated. If the wireless earbuds will not turn on: Make sure the earbuds are fully charged. Can I change the battery for the earbuds? The wireless earbuds use a built-in non-detachable battery which cannot be removed. If the charging case cannot be recharged: If you use a power outlet, ensure that the power supply is connected securely and the outlet works. If you use a computer, ensure that it is connected and the USB port is powered. ⚠ Safety instructions for the lithium battery and charging the product -The input voltage to the product is 5V 1A. -In order to charge the product in safe manner and reliable conditions, please only adopt certified appropriate charger/adaptor for charging the product. -Only charge the product at ambient temperatures between 10 deg "C/ 50 deg "F and 40 deg "C/104 deg "F. -Do not heat above 70 deg "C/158 deg "F, eg. Do not expose to sunlight or throw into fire. -Switch off the product after use. -Please note that we won't take any responsibility for any wrong operation (eg. Voltage higher than 5V) as this may result in severe injury or loss of property, and we cannot control the operating process during the time the user using the product. -In extreme cases, abuse or misuse of lithium battery pack can lead to explosion, heat generation, fire development or smoke development.	FCC STATEMENT 1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation. 2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates noise and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help. RF warning statement: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Item# EP-0685 FCC FCC ID: 2ADMS-EP-0685 Made in China
--	--	---