


S6plus说明书中英文版.pdf

56mm


64mm

无线蓝牙耳机



使用说明书

产品示意图

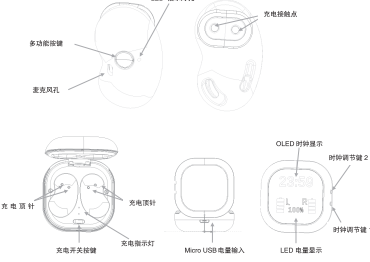

包装清单

S6plus蓝牙耳机主机  
S6plus蓝牙耳机充电盒  
Micro 5pin 充电线  
使用说明书

产品规格

产品型号: S6 plus  
蓝牙版本: Bluetooth V5.1  
电池规格: 耳机3.7V 38mAh; 充电仓3.7V 260mAh  
支持模式: HFP/HSP/ A2DP/AVRCP  
灵敏度: 105dB ± 3dB S.P.L at 1KHz  
信号距离: 10米 (无任何较大障碍物的理想环境中)  
播放时间: 约2.5小时  
通话时间: 约3小时  
待机时间: 约80小时  
充电时间: 给充电仓充电约4.5小时, 充电仓给耳机充电约1小时  
充电仓给耳机充电次数: 约3次

功能操作说明

1. 开机  
将耳机从充电仓拿出自动开机或长按左右耳机多功能键3秒开机。

2. 关机  
将耳机放入充电仓自动关机或长按左右耳机多功能键5秒关机。

3. 开机回连  
当配对成功后, 第二次开机时蓝牙耳机优先进入回连状态自动回连已连接过的手机。

4. 播放/暂停  
在待机状态下, 单击左右耳机多功能键均可直接播放音乐, 播放时单击左右耳机多功能键可暂停播放。

5. 切换歌曲  
播放音乐时长按左耳机多功能键2秒同时响“嘀”一声切换到上一曲, 长按右耳机多功能键2秒同时响“嘀”一声切换到下一曲。

6. 音量加减  
双击左耳机多功能键逐级加大音量, 双击右耳机多功能键逐级减小音量

7. 来电接听  
手机来电时, 单击左右耳机多功能键均可接听电话。

8. 来电挂断  
手机通话时, 单击左右耳机多功能键均可挂断电话。

9. 来电拒接  
手机来电时, 长按左右耳机多功能键2秒均可拒接来电。

10. 未号重拨  
在待机或者播放音乐时, 三击左耳机多功能键即可拨打您通话记录中最后一个拨打过的电话。

11. 启动语音助手  
三击右耳机多功能键即可启动苹果Siri或谷歌语音助手进行语音控制手机操作。

12. 低电量提示

当蓝牙耳机电池电量不足时, 间隔30秒播放一次电量不足提示音, 直至耳机低电关机。

13. 时间调整  
短按一下时钟调节键1, 时钟数字会闪烁; 短按时钟调节键2加数字, 每按一次加1, 调整到正确的时间既可, 时钟和分钟可由时钟调节键1来切换

配对方式

普通配对方式  
1.从充电仓取出或者同时长按左、右耳机多功能键3秒开机, 直至红蓝灯交替闪烁, 进入对耳搜索配对状态, 进入对耳自动配对, 配对成功后主耳(右耳)持续红蓝灯交替闪烁, 副耳为蓝灯慢闪, 同时播放对耳配对成功提示音。  
2.启动手机或者其它设备的蓝牙功能, 如果是安卓系统手机或者设备请点击手机“搜寻蓝牙设备”选项, 如果是IOS系统的手机或者设备则会自动搜索设备; 当搜寻到该蓝牙耳机的型号后, 点击进入配对; 当配对成功后, 主(右)耳机会发出连接成功的提示音, 左右耳机指示灯变为蓝灯慢闪, 进入连接待机状态, 配对成功后主耳为右声道, 副耳为左声道。  
3.两只耳机也可单独与手机进行配对使用, 操作方法可按上步骤2操作手法进行操作。

充电操作

1.将Micro USB充电线一头插上充电仓的USB口一头插上充电器即可给充电仓充电, 充电指示灯会亮, LED电量显示会变动  
2.给耳机充电: 将耳机放入充电仓即可自动充电, 充电时耳机指示灯为红色, 充满电后熄灭;

注意事项


1.请在安全的环境下充电。在给充电仓充电时当充电指示灯熄灭后请尽快将充电仓与USB充电线分开, 以免在长时间插着充电对充电仓造成损伤。  
2.在音乐播放时, 请将音乐调至合适音量大小, 以免长期在大音量状态下对听力造成损伤。  
3.尽量避免在有干扰源的地方使用本耳机, 否则有可能对耳机信号产生影响。  
4.尽量避免在有腐蚀的环境中使用本耳机, 以免对耳机的功能产生影响。

温馨提示:在您使用本蓝牙耳机听音乐或者通话时, 请注意适当调节音量大小, 以免过大的音量对您的听力造成影响!

56mm


64mm

Wireless Bluetooth Headset



user manual

Product diagram

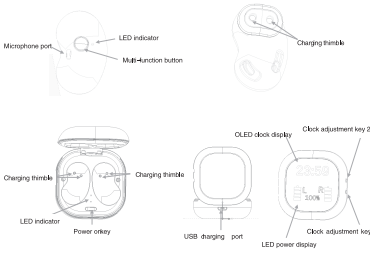

Packing list

Bluetooth headset host  
Endurance charging box  
Micro 5pin charging cable  
User manual  
Earplug silicone cap

Product specification

Product model: S6 plus  
Bluetooth version: Bluetooth V5.1  
Battery specification: earphone 3.7v 38mAh; Charging bin 3.7v 260mAh  
Supported mode: HFP/HSP/ A2DP/AVRCP  
Sensitivity: 105dB ± 3dB S.P.L at 1KHz  
Signal distance: 10 m (in an ideal environment without any large obstacles)  
Playing time: about 2.5 hours  
Talk time: approximately 3 hours  
Standby time: about 80 hours  
Charging time: charge the charging warehouse for about 1.5 hours, and charge the headset for about 1 hour  
Charging times for the headset: about 3 times

Functional instructions

1.Boot  
Take the headset out of the charging bin and start it automatically or long press the left and right multi-function button of the headset for 3 seconds.

2. Shut down  
Put the headset into the charging bin and turn off automatically.

3. Boot back  
When the pairing is successful, the bluetooth headset will first enter the state of reconnect when the second time is started and automatically reconnect the connected phone.

4. Play/pause  
In standby state, click the left or right earphone multifunction button to play music directly, while click the left or right earphone multifunction button to pause playing.

5. Switch songs  
Press the left earphone multifunction button for 2 seconds to play music, and then press the right earphone multifunction button for 2 seconds to play music.

6. Volume up and down  
Double-click the left earphone multifunction button to increase the volume step by step, and double-click the right earphone multifunction button to decrease the volume step by step.

7. Answer incoming calls  
When the mobile phone calls, click the left or right earphone multifunction button can answer the phone.

8. Call hang up  
When talking on the mobile phone, you can hang up the phone by clicking the left or right earphone multifunction button.

9. Call reelection  
When the phone calls, long press the left and right earphone multifunction button for 2 seconds to reject the call.

10. Redial  
When you are on standby or playing music, you can make the last call in your phone record by three clicks of the left earphone multifunction button.

11. Start voice assistant  
Three clicks on the right earphone multifunction button can activate apple's Siri or Google voice assistant for voice control

of the phone operation.

12. Low battery alert  
When the battery of bluetooth headset is low, play the warning sound of low battery at an interval of 30 seconds until the headset is low battery and turns off.

13: Time adjustment  
Short press the Clock Adjustment Key 1, the clock number will flash; short press the Clock Adjustment Key 2 plus the number, each time plus 1, adjust to the correct time can be, clock and minutes can be switched by the Clock Adjustment Key 1

pairing method

1. Take out from the charging warehouse or press the left and right earphone multifunction button for 3 seconds to start up the headset until the red and blue lights flicker alternately, enter the state of search and pairing for the ear, enter the state of automatic pairing for the ear. After the pairing is successful, the red and blue lights of the main ear (right ear) continue to flicker alternately, while the blue lights of the secondary ear slowly flash, and play the prompt sound of successful pairing for the ear.  
2. Start the bluetooth function of mobile phone or other devices. If it is an android phone or device, please click the "search bluetooth device" option. When the model of the bluetooth headset is found, click to enter pairing; After the pairing is successful, the main (right) ear will send out a signal that the connection is successful, and the indicator lights of the left and right earphones will turn to blue light and enter the standby state of connection. After the pairing is successful, the main ear will be the right channel, and the secondary ear will be the left channel.

3. The two earphones can also be paired with the mobile phone independently. The operation method can be operated according to the operation method in step 2 above.

Charging operation

1. Plug one end of the Micro USB charging cable into the USB port of the charging warehouse and plug one end of the charger to charge the charging warehouse. The LCD will display the latest power.  
2. Charge the earphone: put the earphone into the charging bin to charge it automatically. The earphone indicator is red when charging, and it will be off after being fully charged. The LCD of the charging cabin will display the remaining power. When the headset is fully charged, the LCD of the charging cabin will go out.

Precautions

1. Please charge in a safe environment. When charging the charging warehouse, please separate the charging warehouse from the USB charging cable as soon as possible after the charging indicator is off, so as to avoid damage to the charging warehouse caused by the long time of charging.  
2. When the music is playing, please adjust the music to the appropriate volume to avoid long-term damage to the hearing under the condition of high volume.  
3. Try to avoid using the earphone where there is interference source, otherwise it may affect the earphone signal.  
4. Try to avoid using the earphone in a corrosive environment, so as not to affect the function of the earphone.  
Tips: when you use this bluetooth headset to listen to music or talk, please pay attention to adjust the volume, so as not to affect your listening too much!

**FCC Warning:**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Caution:** Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.