


AppendixA: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.7349	0.5	PASS
BLE_1M	Ant1	2440	0.7295	0.5	PASS
BLE_1M	Ant1	2480	0.7317	0.5	PASS

Test Graphs

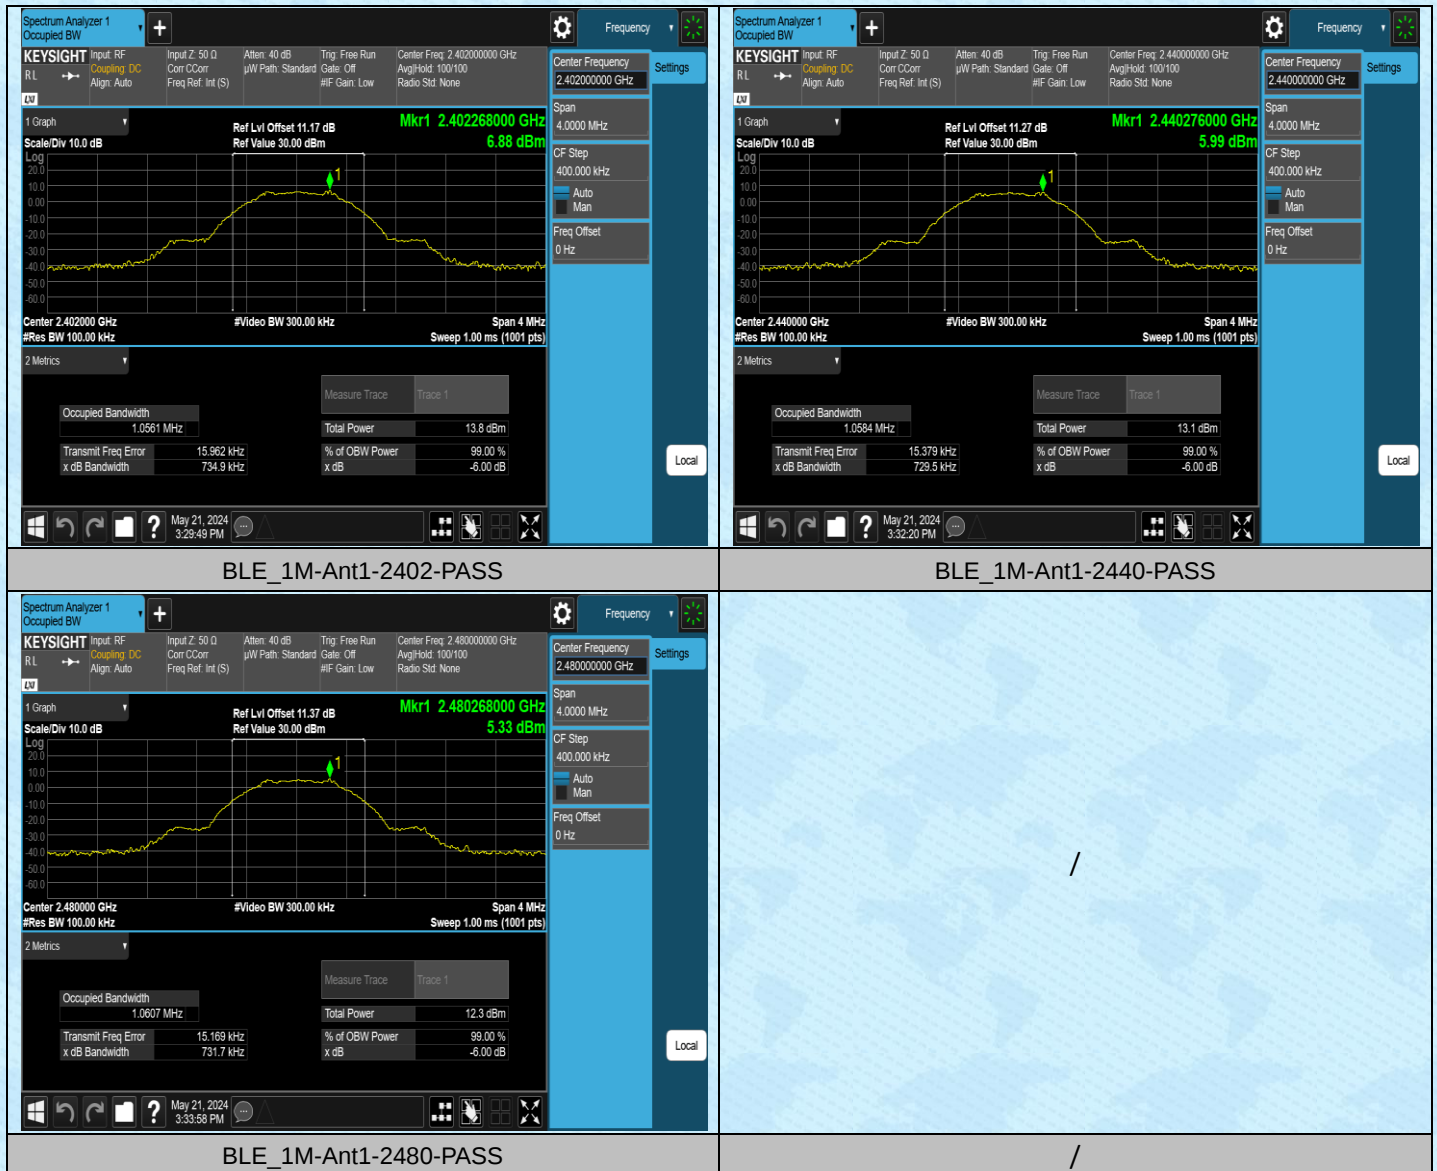


AppendixB: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0459	2401.4949	2402.5408	---	---
BLE_1M	Ant1	2440	1.0459	2439.4943	2440.5402	---	---
BLE_1M	Ant1	2480	1.0460	2479.4933	2480.5393	---	---

Test Graphs

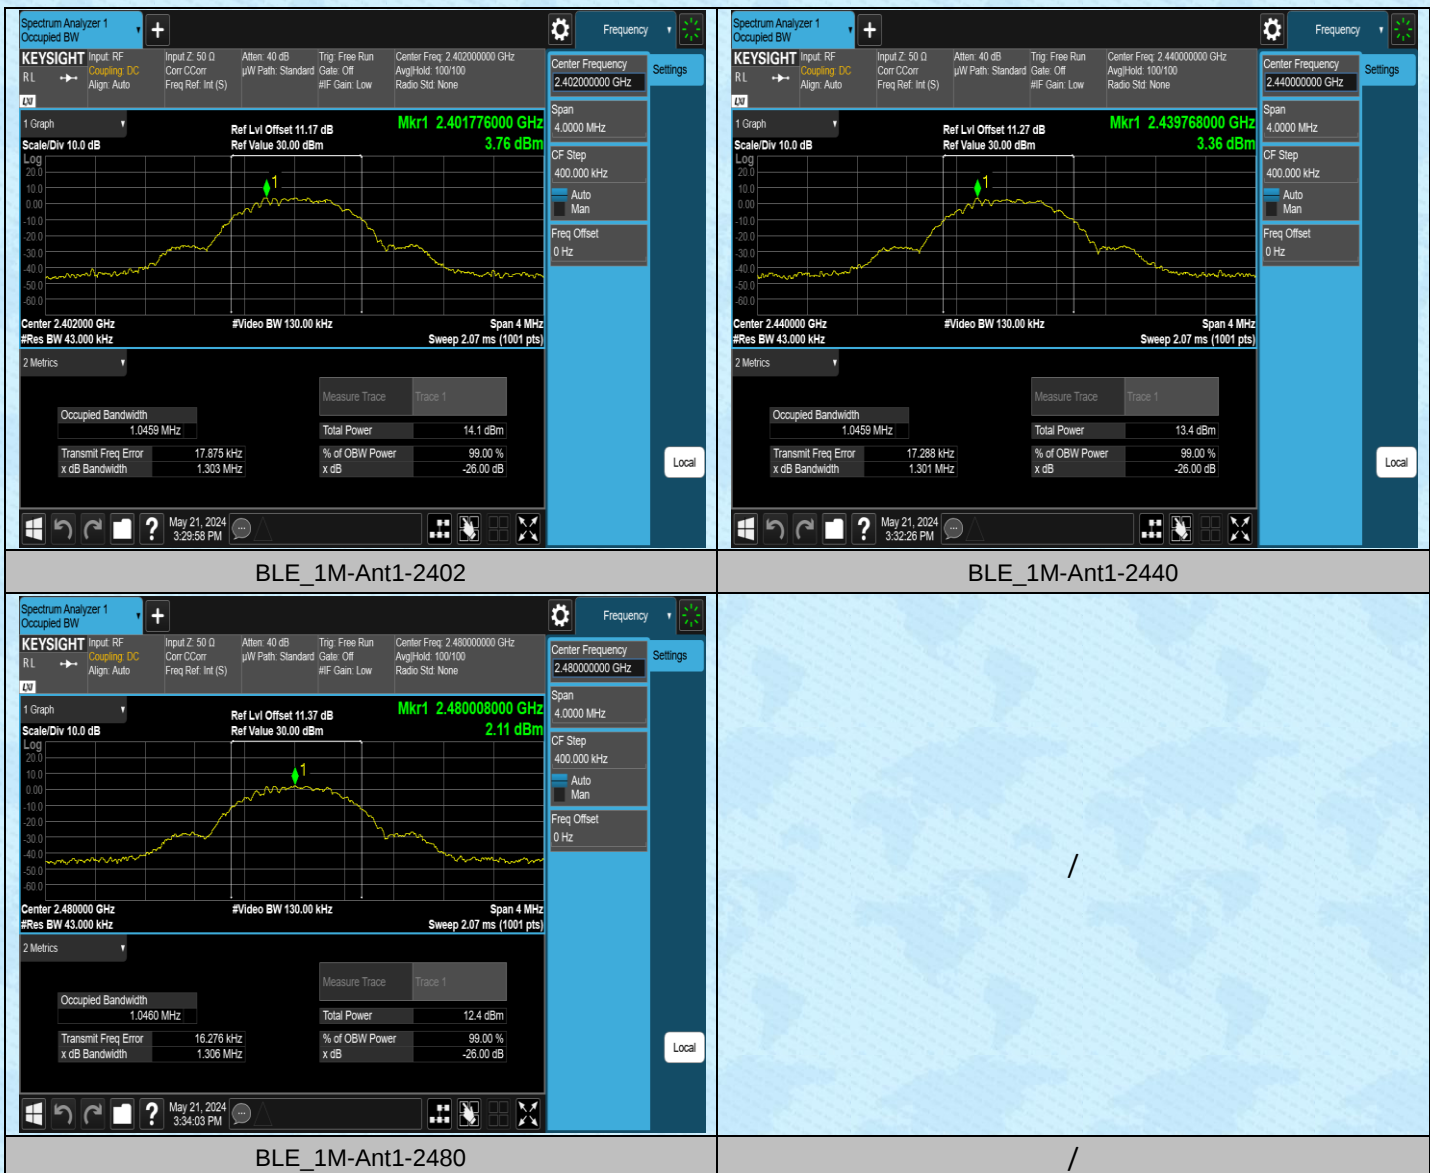


AppendixC: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.87	≤30	PASS
BLE_1M	Ant1	2440	7.16	≤30	PASS
BLE_1M	Ant1	2480	6.35	≤30	PASS

Test Graphs Peak

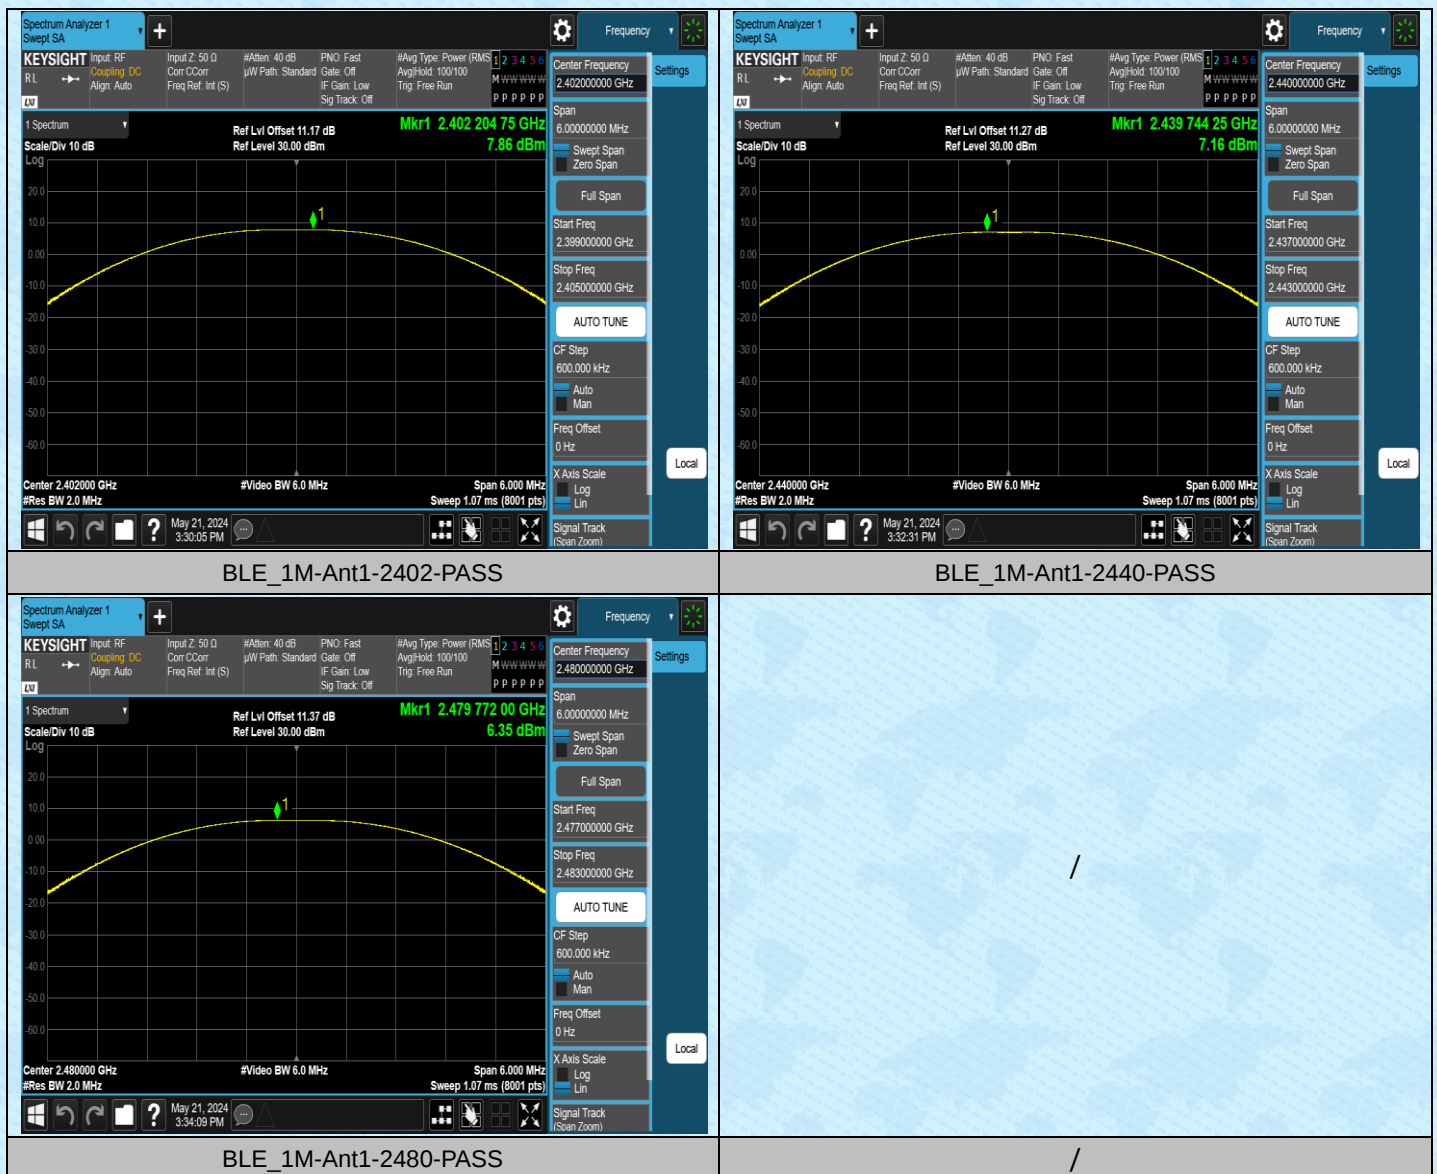


AppendixD: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.17	≤8.00	PASS
BLE_1M	Ant1	2440	-10.72	≤8.00	PASS
BLE_1M	Ant1	2480	-11.58	≤8.00	PASS

Test Graphs

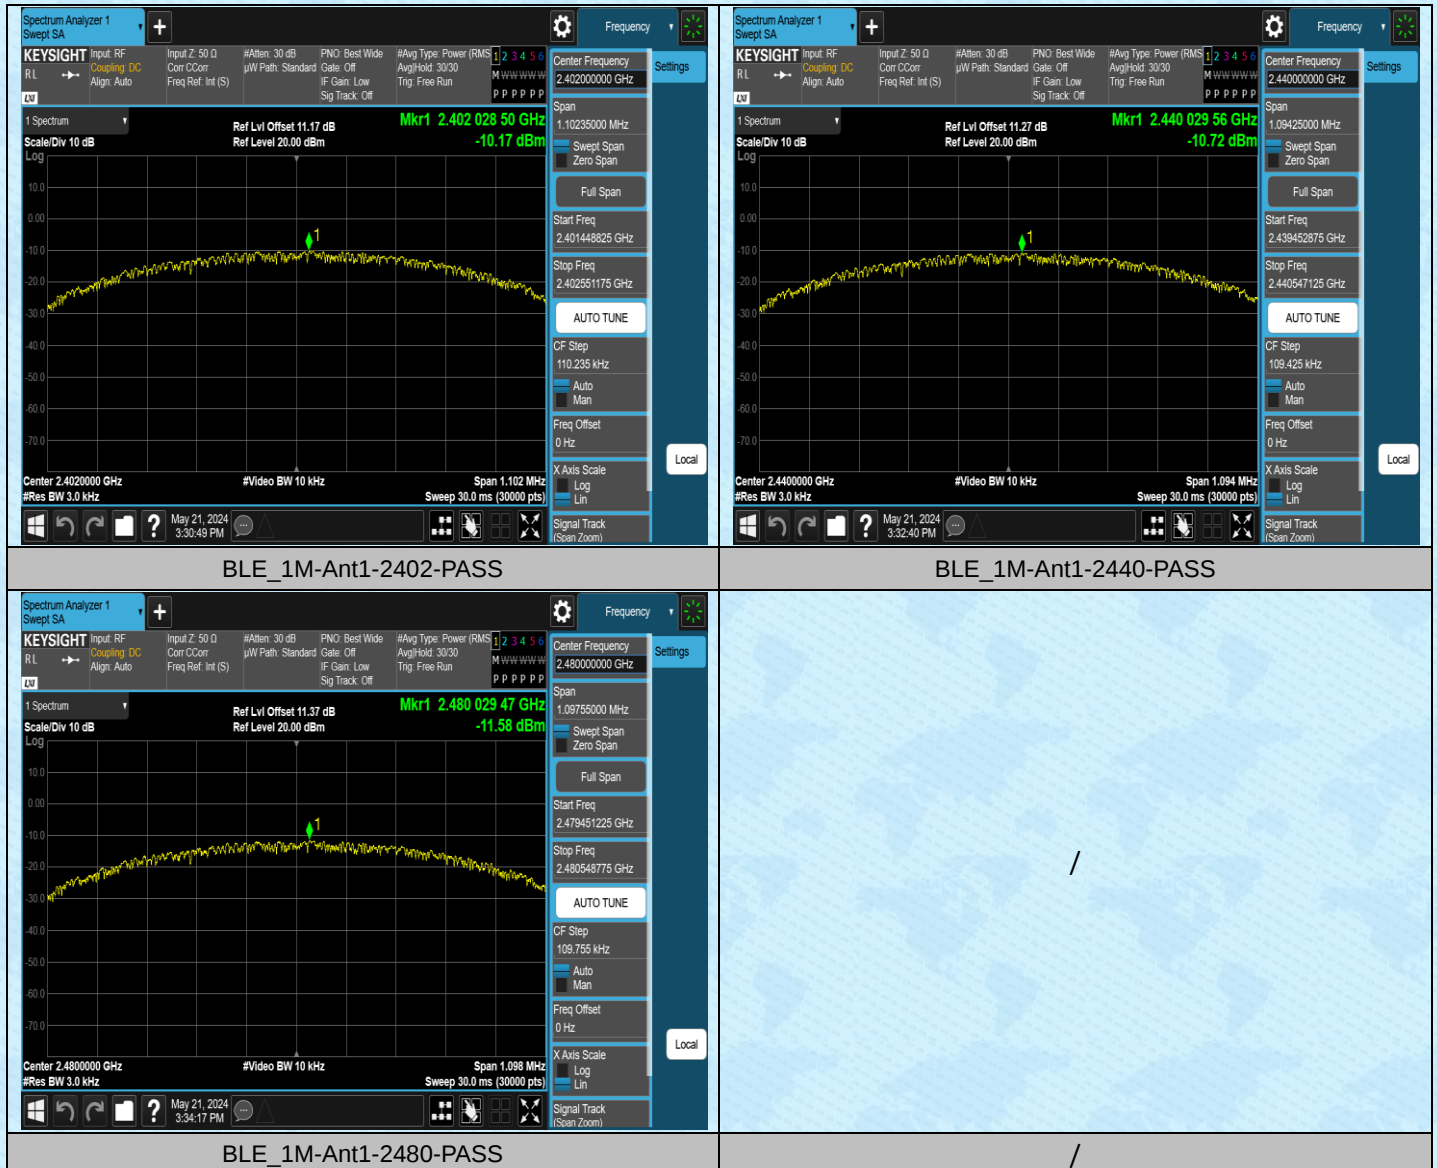


AppendixE:Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	6.70	-44.90	≤-13.30	PASS
BLE_1M	Ant1	High	2480	4.47	-48.33	≤-15.53	PASS

Test Graphs

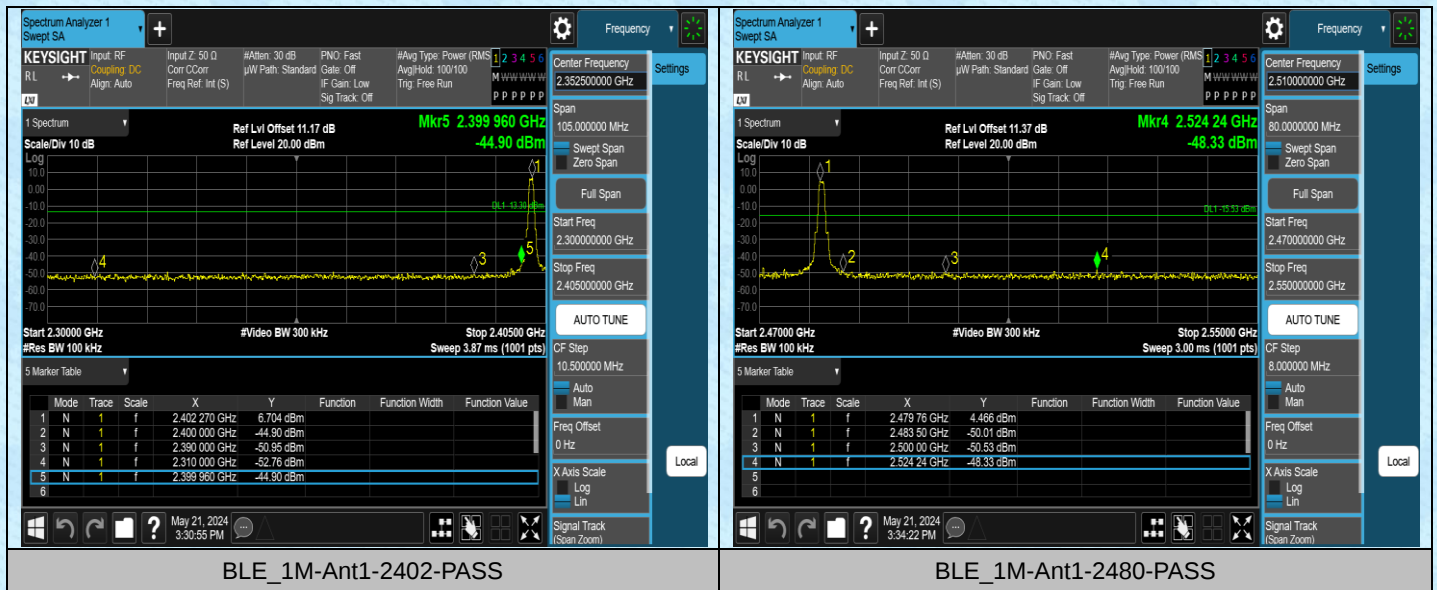



AppendixF:Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	6.86	6.86	---	PASS
BLE_1M	Ant1	2402	30~1000	6.86	-61.71	≤-13.14	PASS
BLE_1M	Ant1	2402	1000~26500	6.86	-49.71	≤-13.14	PASS
BLE_1M	Ant1	2440	0~Reference	6.02	6.02	---	PASS
BLE_1M	Ant1	2440	30~1000	6.02	-57.63	≤-13.98	PASS
BLE_1M	Ant1	2440	1000~26500	6.02	-49.83	≤-13.98	PASS
BLE_1M	Ant1	2480	0~Reference	5.25	5.25	---	PASS
BLE_1M	Ant1	2480	30~1000	5.25	-61.14	≤-14.75	PASS
BLE_1M	Ant1	2480	1000~26500	5.25	-49.61	≤-14.75	PASS


Test Graphs

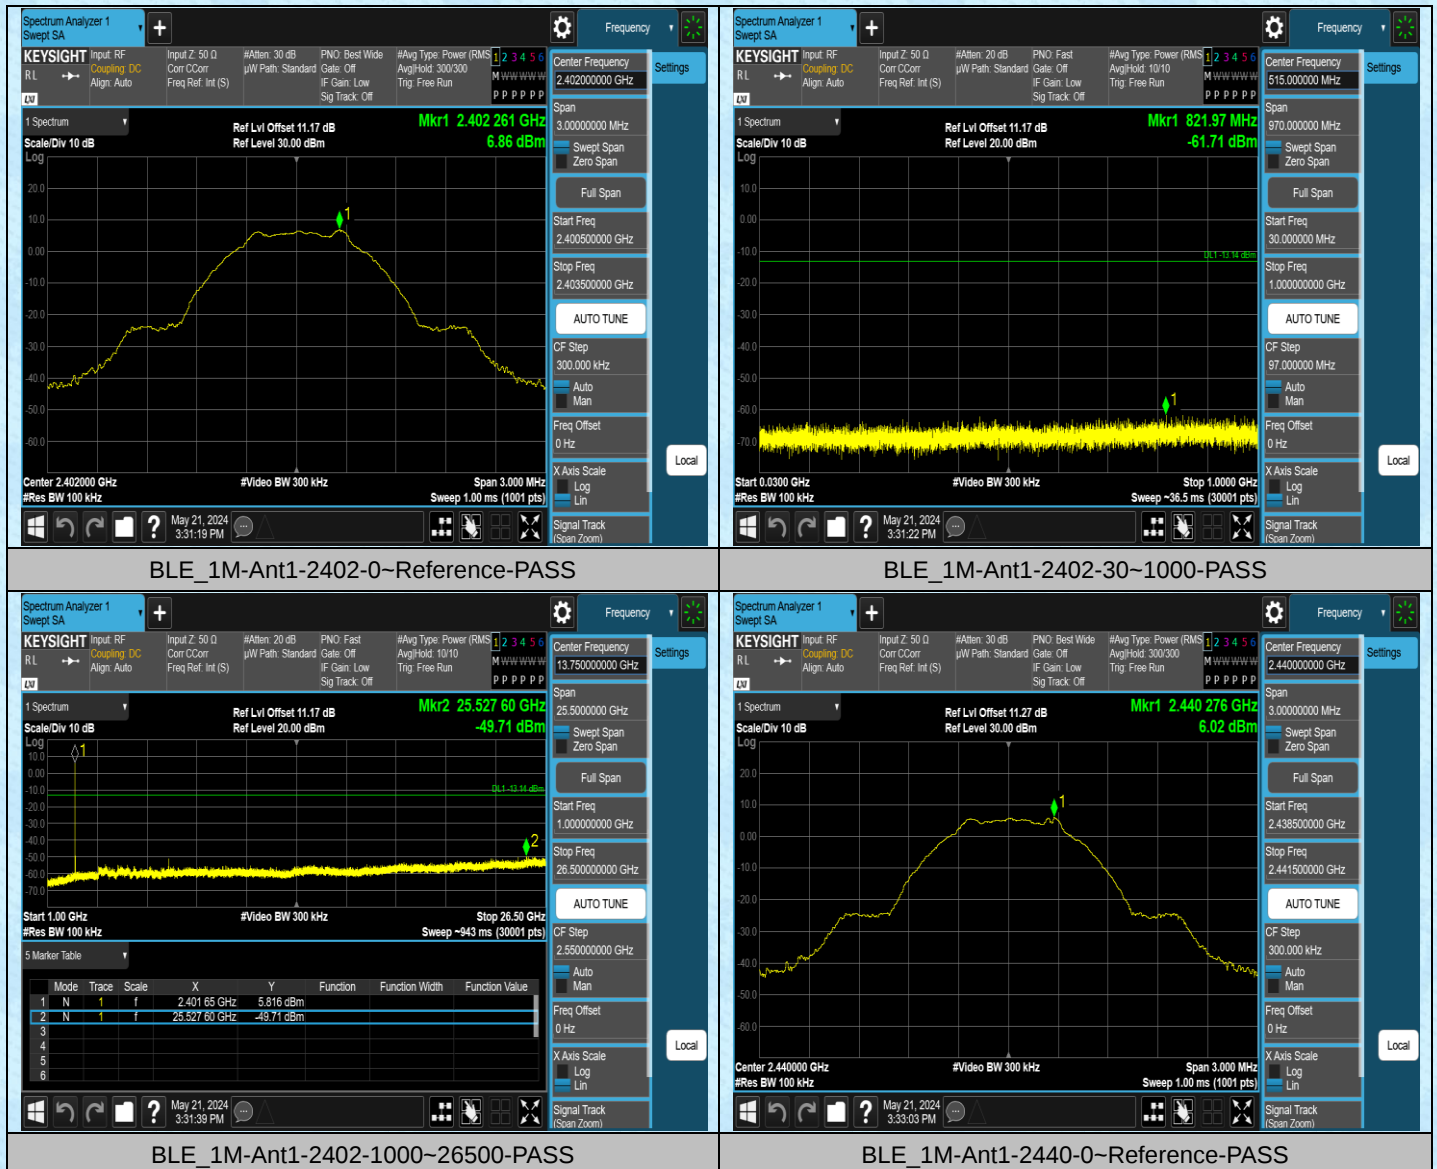

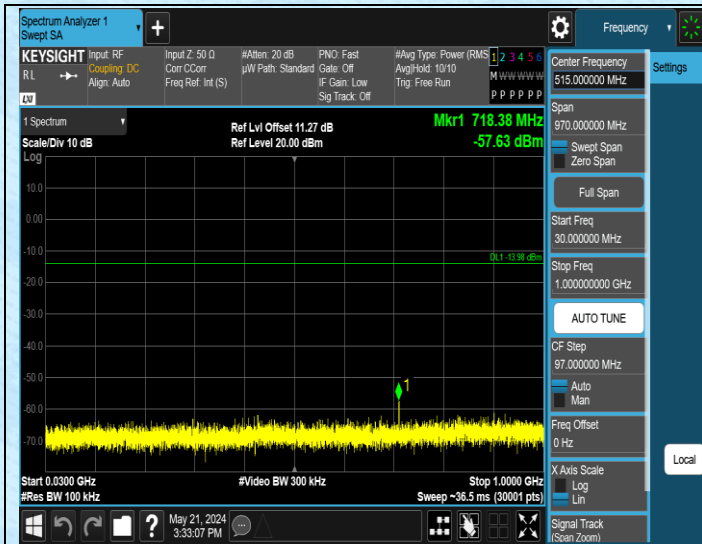

BLE_1M-Ant1-2440-30~1000-PASS

BLE_1M-Ant1-2440-1000~26500-PASS

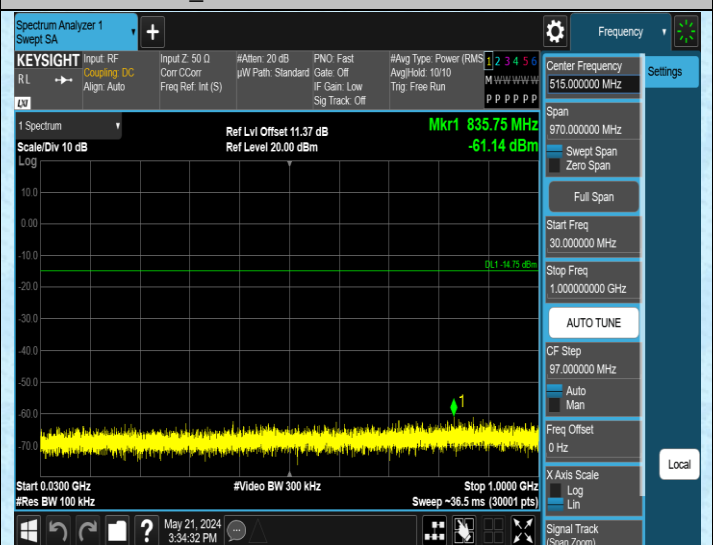

BLE_1M-Ant1-2480-0~Reference-PASS

BLE_1M-Ant1-2480-30~1000-PASS



BLE_1M-Ant1-2480-1000~26500-PASS

/

/

-----End-----