


RF924

SIZE: 180 x 120 mm

材质：80G 书写纸

拆法：风琴页 成品90 x 57 mm


单色黑白印刷

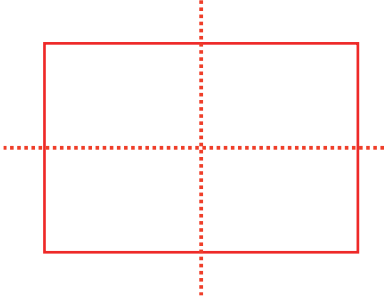

Remote Control Switch

Specifications:
Battery: CR2032*2
Frequency: 433.92MHz
Temperature Range: 32°F~104°F
Indoor use in dry location

Model – RF924-TX

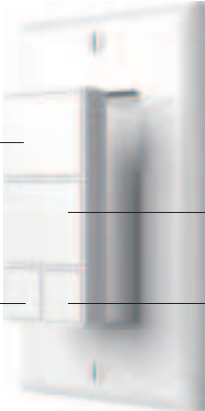

Control ON

Control OFF


Adjust Brightness

Colour temperature adjusting

1. Please read this the online guidels at support Minosto.com/Z-wave remote carefully.
2. Do not use it in location with direct water contact.
3. Contains small parts keep away from children.

Power the device

1. Use by hand open the remote cap,and push it to separate the 2 halves.
2. Remove battery tabs.
3. Your Z-wave remove Immediately should flash LED to indicate it is powered.



Inclusion/Exclusion Function

To add the device

1. Follow the instructions for your Z-Wave certified controller to add device from the Z-Wave network.
2. Once the controller is preparing to add your device, press the **FIRST BUTTON(ONLY)** 5 times, LED is flashing in blue during inclusion and LED stays on green for 2 seconds after inclusion successfully. If LED flashing purple for 3 seconds, please reset the device. LED will stay on red for 2 seconds after inclusion failed.

To remove the device

1. Follow the instructions for your Z-Wave certified controller to remove a device from the Z-Wave network.
2. Once the controller is preparing to remove your device, press the **SECOND BUTTON (ONLY)** 5 times, LED is flashing in purple during exclusion and the LED stays on green for 2 seconds after exclusion successfully. LED will stay red for 2 seconds after exclusion failed.

Wake up the Device

Press the **THIRD BUTTON** 5 times quickly, LED will stay solid on blue when awake and will turn off when device goes back to sleep mode.

Factory reset

Manual: Reset: Press the **FOUR BUTTON** 5x, then press it 5x again when the red light is flashing.

FCC warning:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference,
(2) This device must accept any interference received, including interference that may cause undesired operation. changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.

CAUTION - PLEASE READ!

This device is intended for installation in accordance with the National Electric Code and local regulations in the United States, or the Canadian Electrical Code and local regulations in Canada. If you are unsure or uncomfortable about performing this installation consult a qualified electrician.

MEDICAL EQUIPMENT

Please DO NOT use this plug to control Medical or Life Support equipment. This device should never be used to control the On/Off status of Medical and/or Life Support equipment.

OTHER WARNINGS

Risk of Fire / Risk of Electrical Shock / Risk of Burns

IMPORTANT SAFETY INSTRUCTIONS

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. Read and follow all instructions that are on the product or provided with the product.
3. do not use an extension cord.
4. Reference the National Electrical Code, NFPA 70, specifically for the installation of wiring andclearances from power and lighting conductors.
5. Installation work and electrical wiring must be done by qualified person(s) in accordance with allapplicable codes and standards, including fire-rated construction.
6. do not install or use within 10 feet of a pool
7. do not use in a bathroom

8. WARNING:

Risk of Electric Shock.

When used outdoors, install only to a covered Class A GFCI protected receptacle that is weatherproof with the power unit connected to the receptacle. If one is not provided, contact a qualified electrician for proper installation. Ensure that the power unit andcord do not interfere with completely closing the receptacle cover.

9. WARNING:

Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface

10.WARNING:

Risk of Electric fire. install only to a receptacle protected by 20A branch circuit over current protection.

SAVE THESE INSTRUCTIONS – This manual contains important safety and operating instructions.