






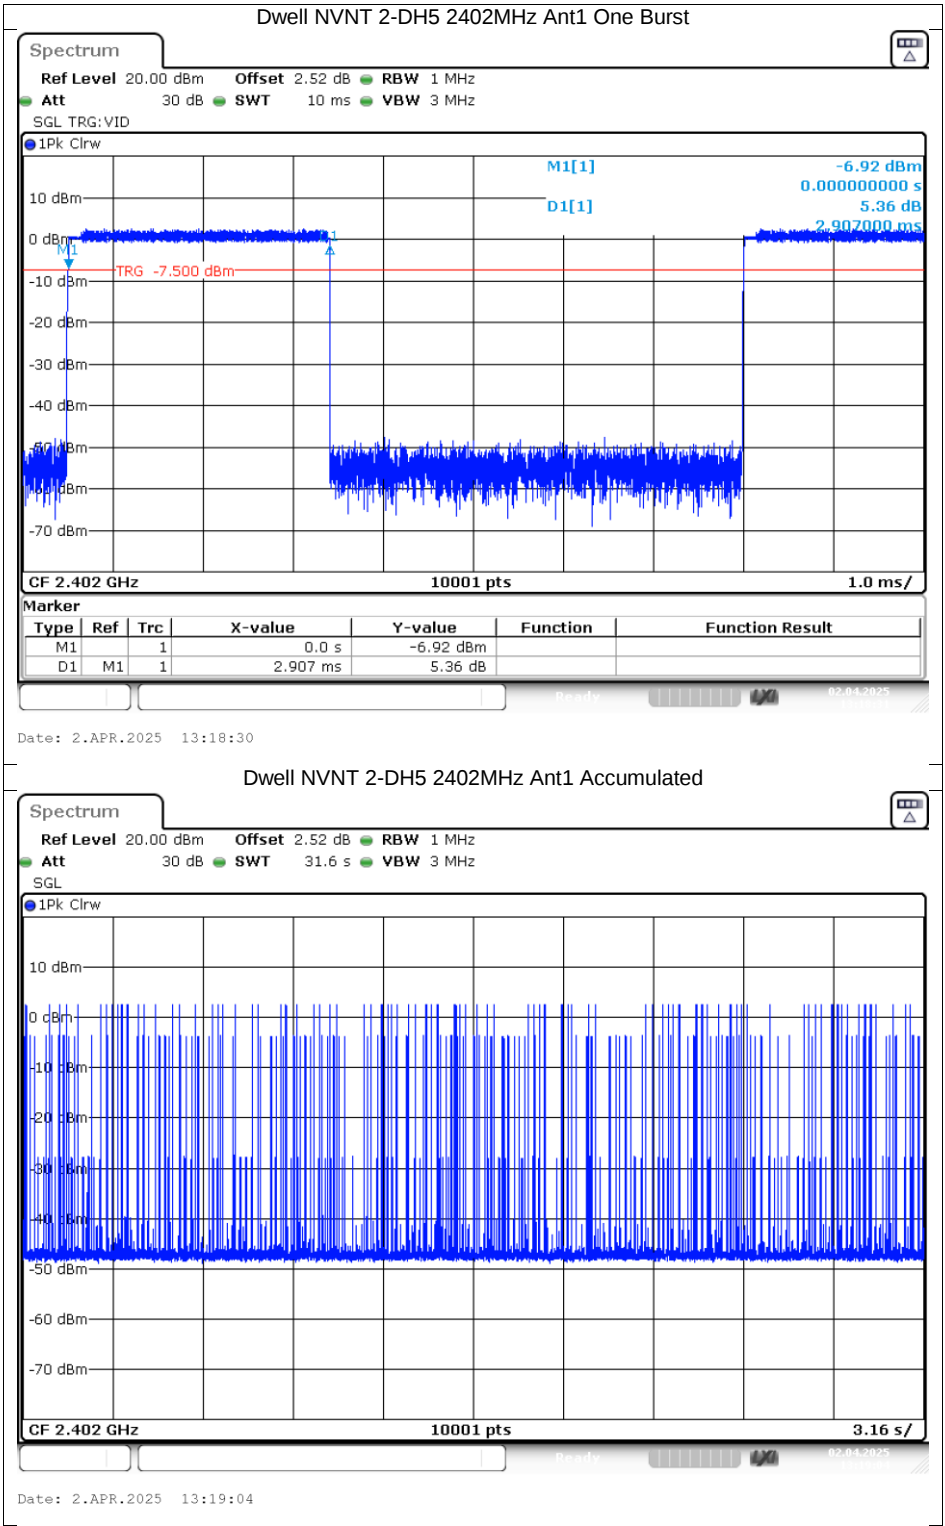


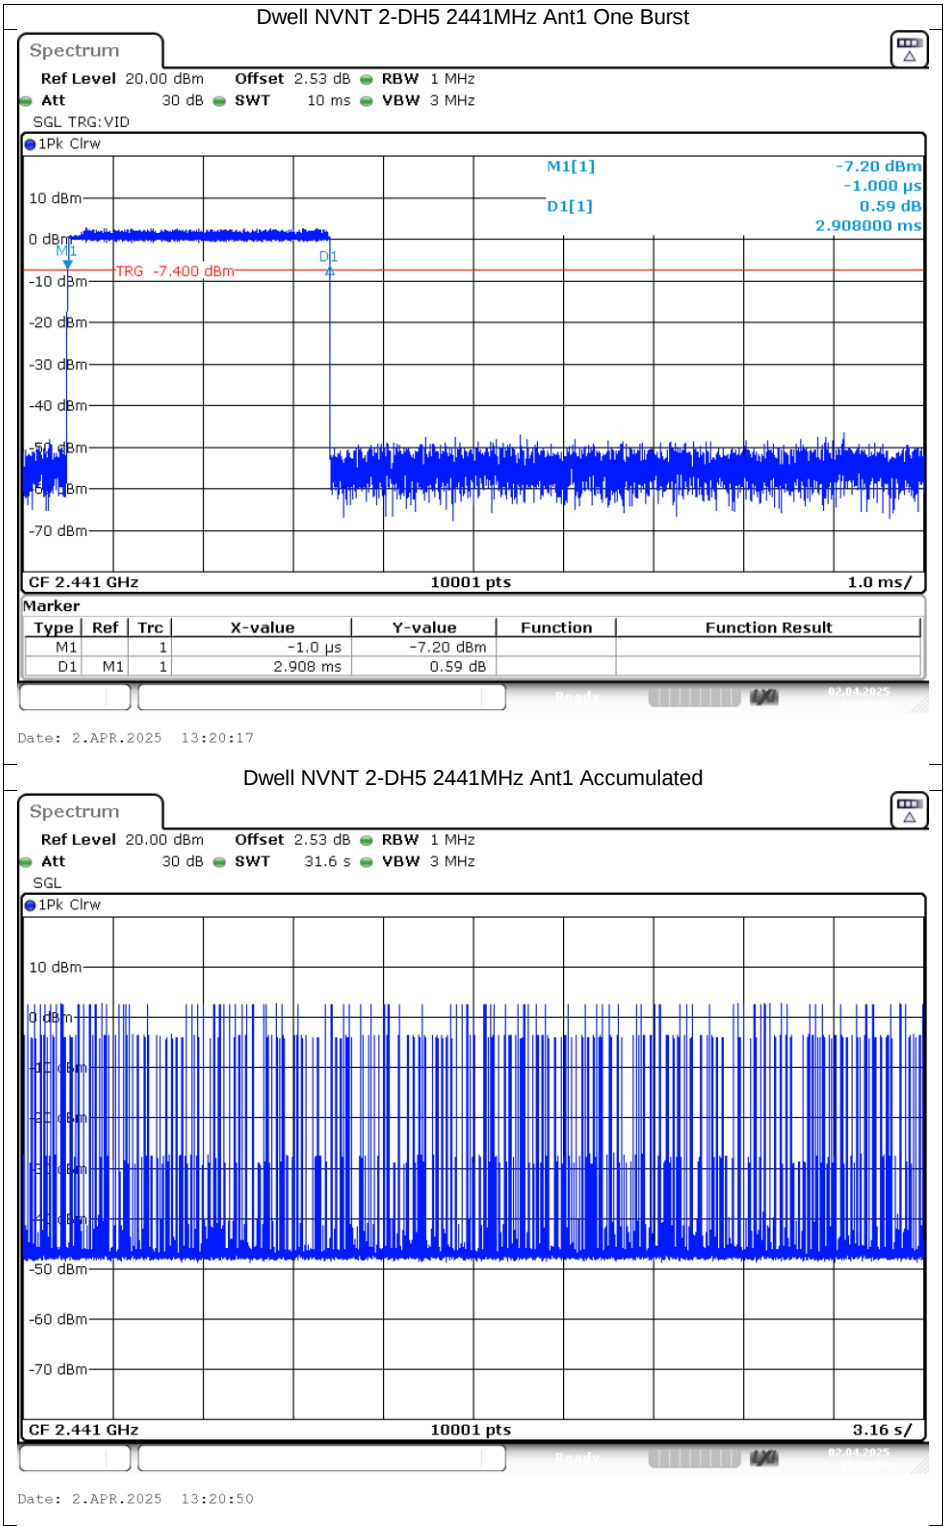

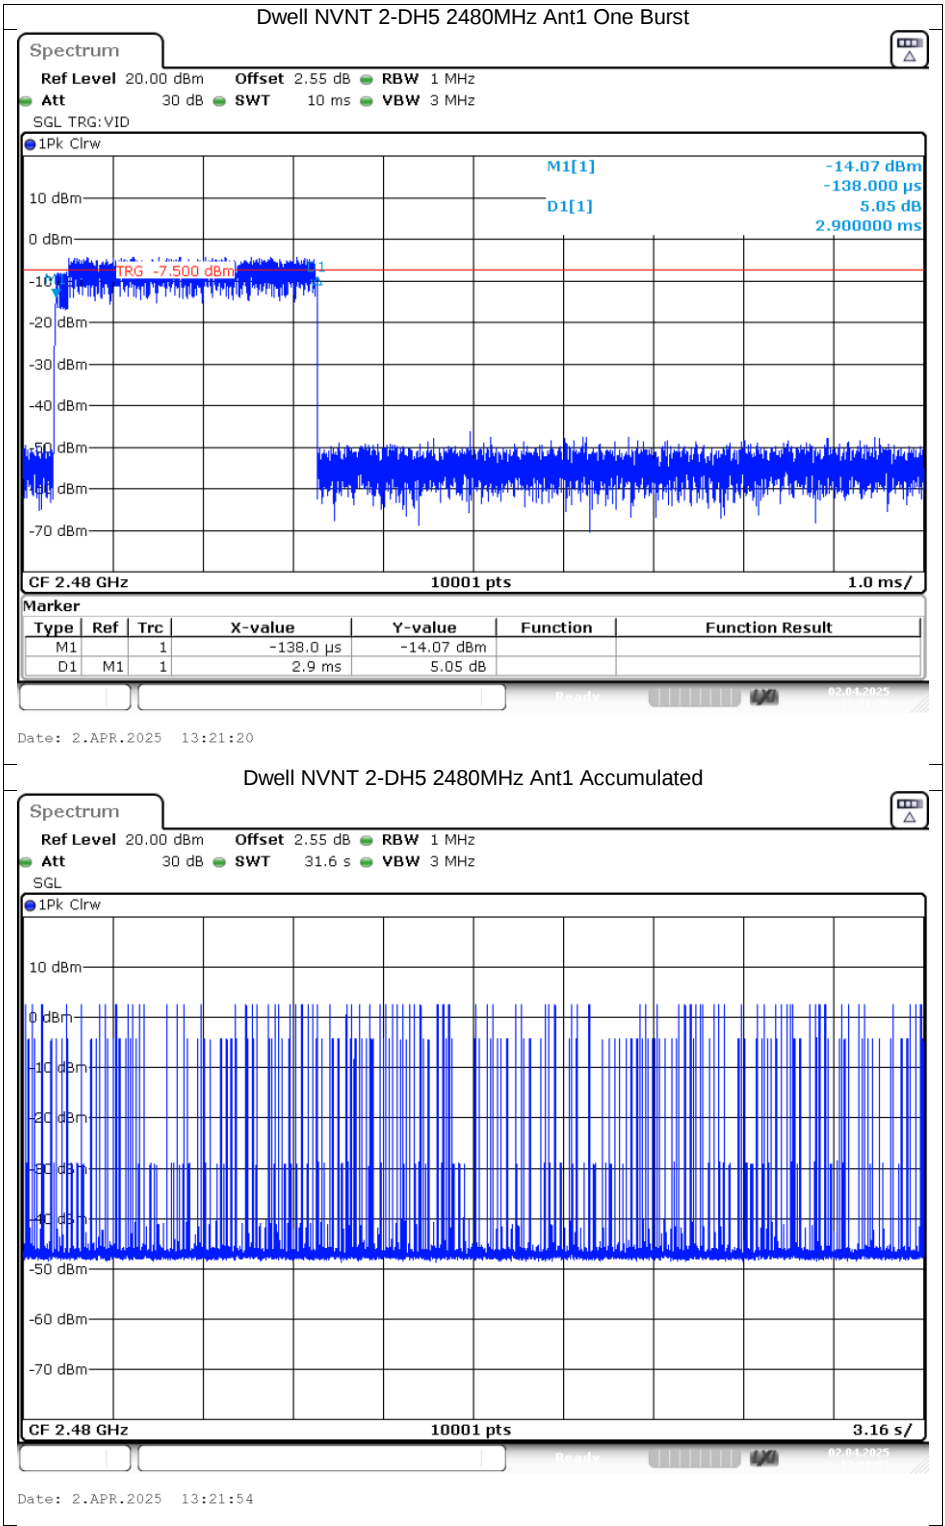

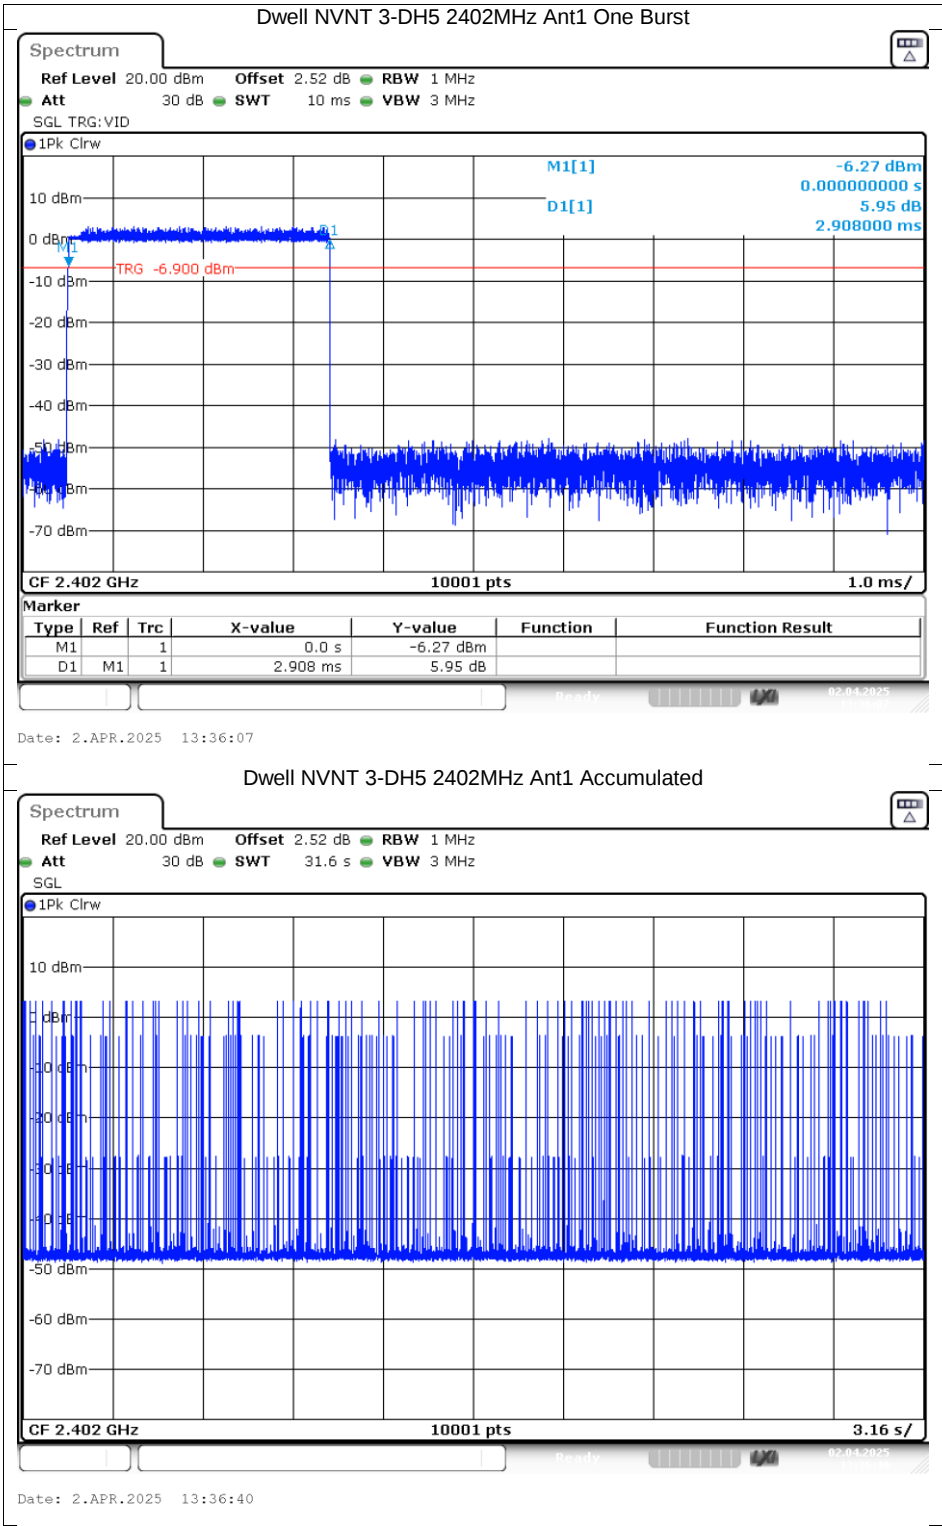


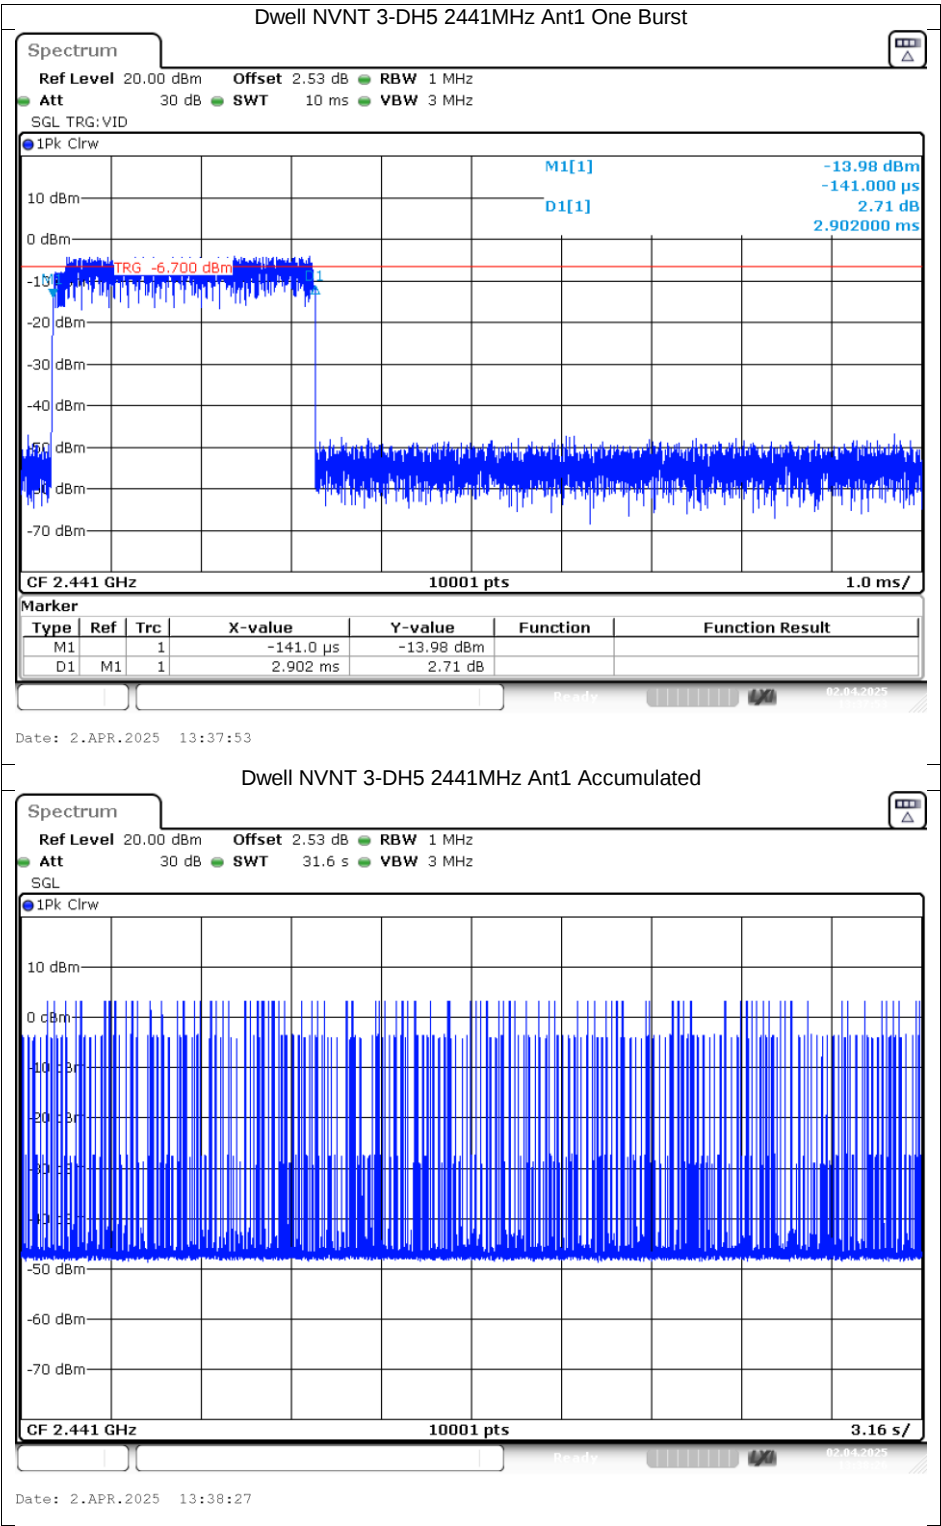


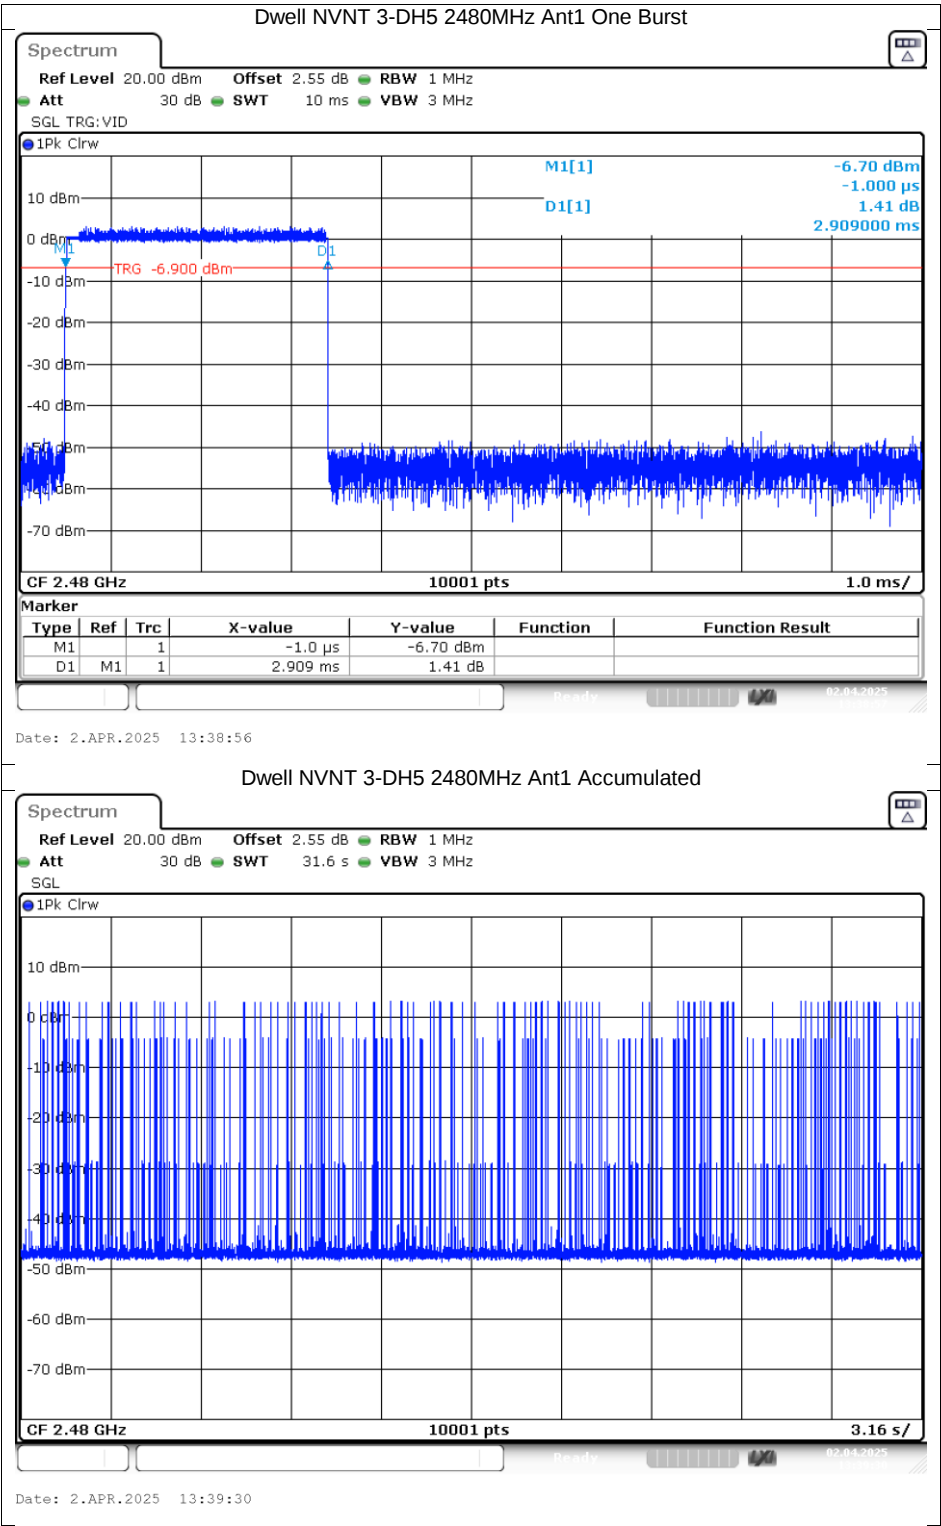



Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-54.9	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57.52	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-54.44	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-58.89	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-55.45	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-55.41	-20	Pass

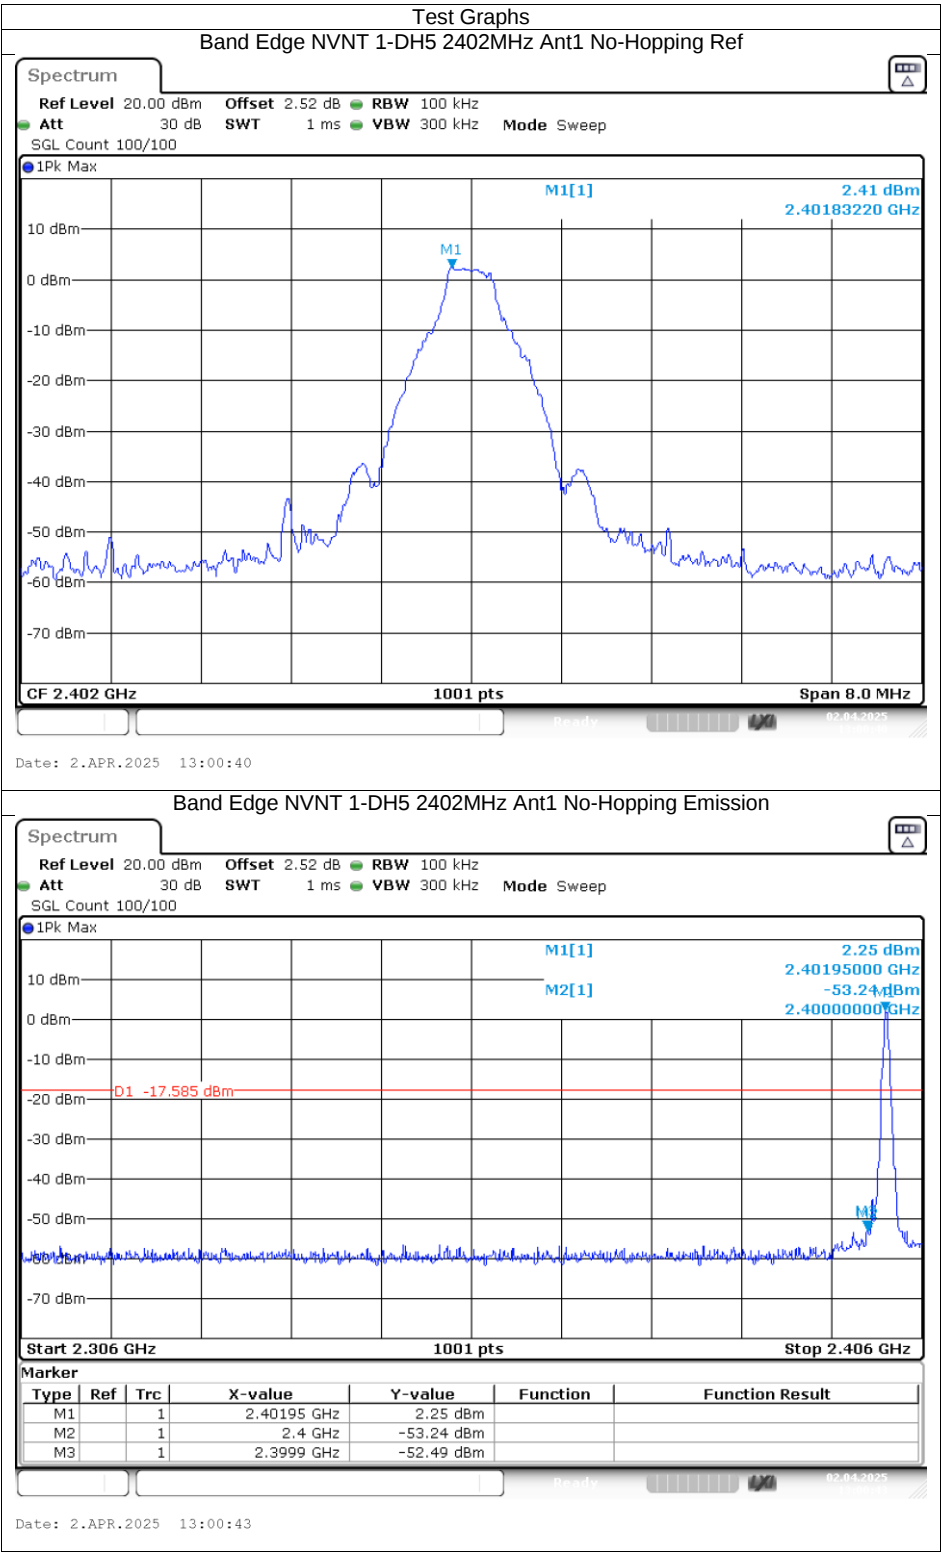


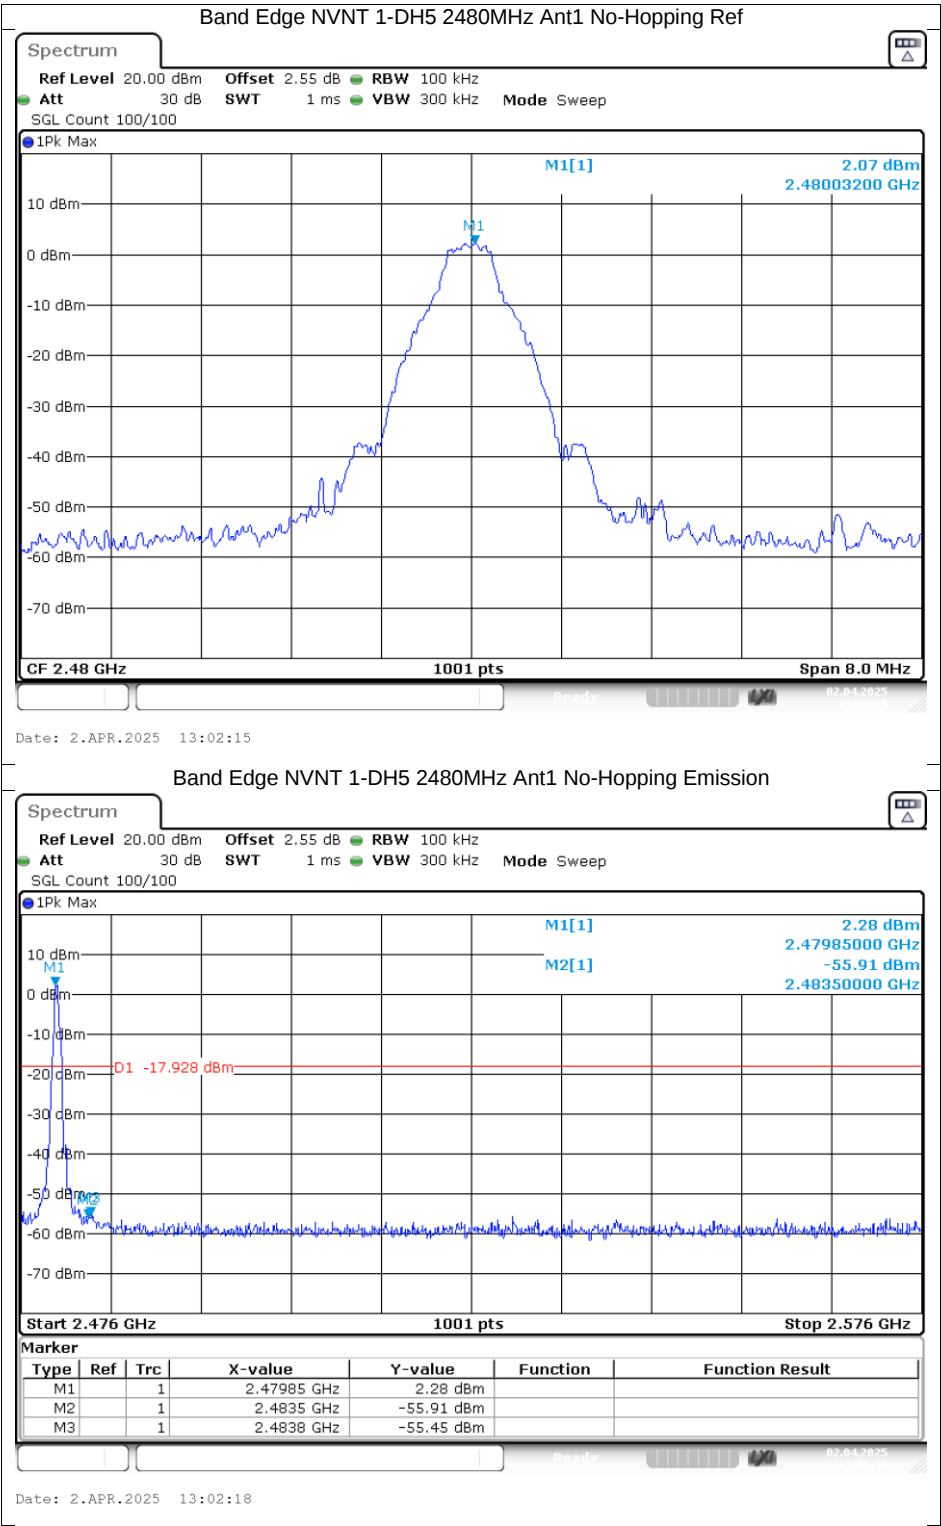

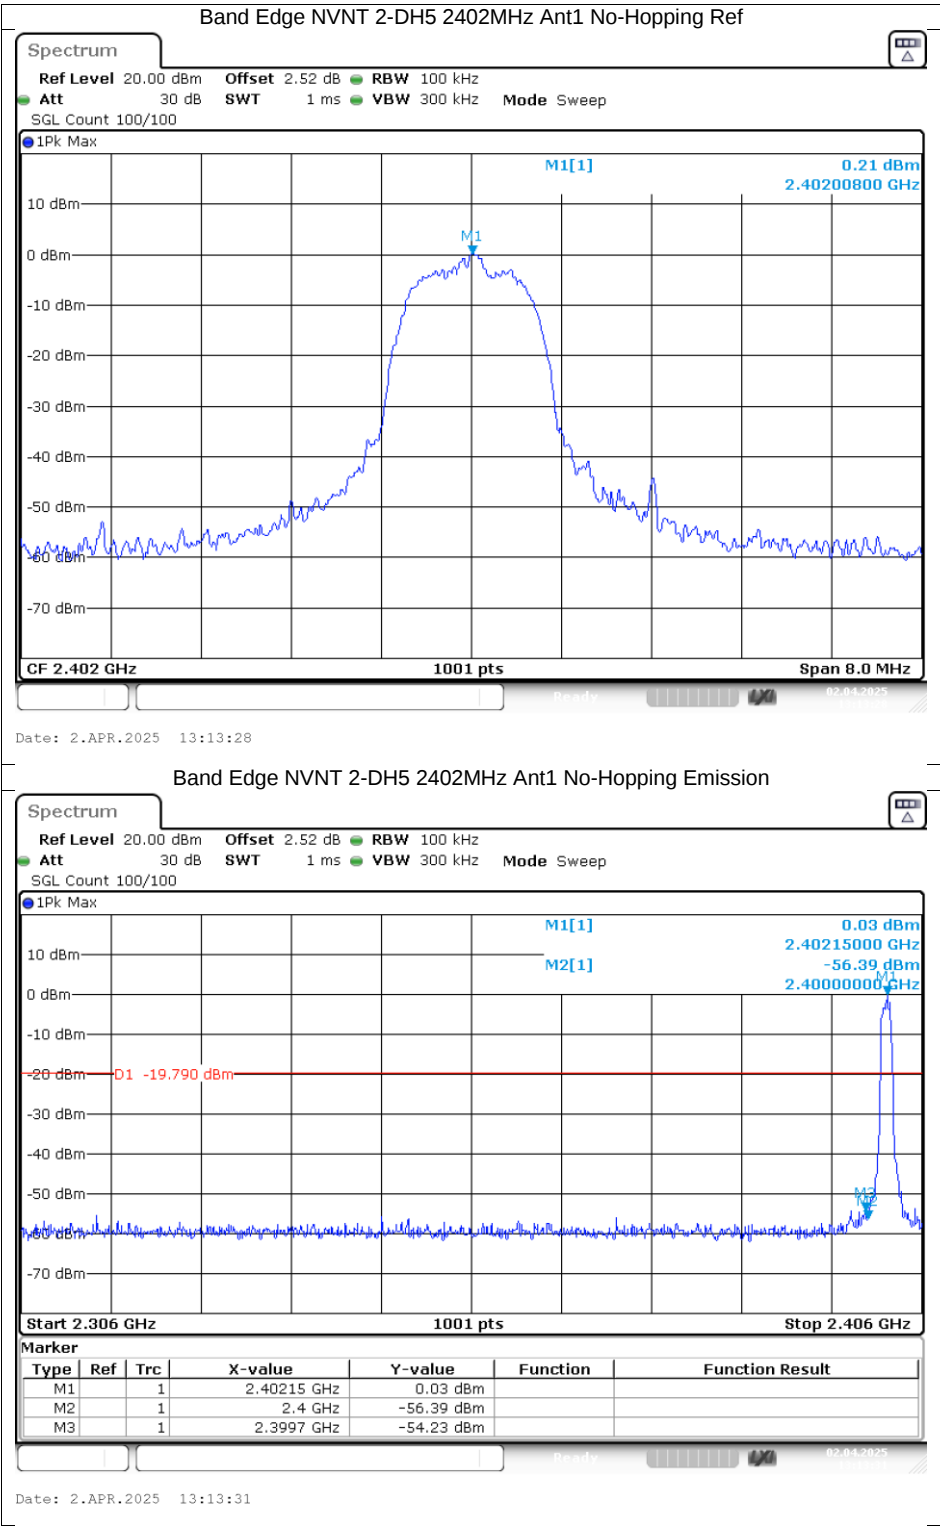

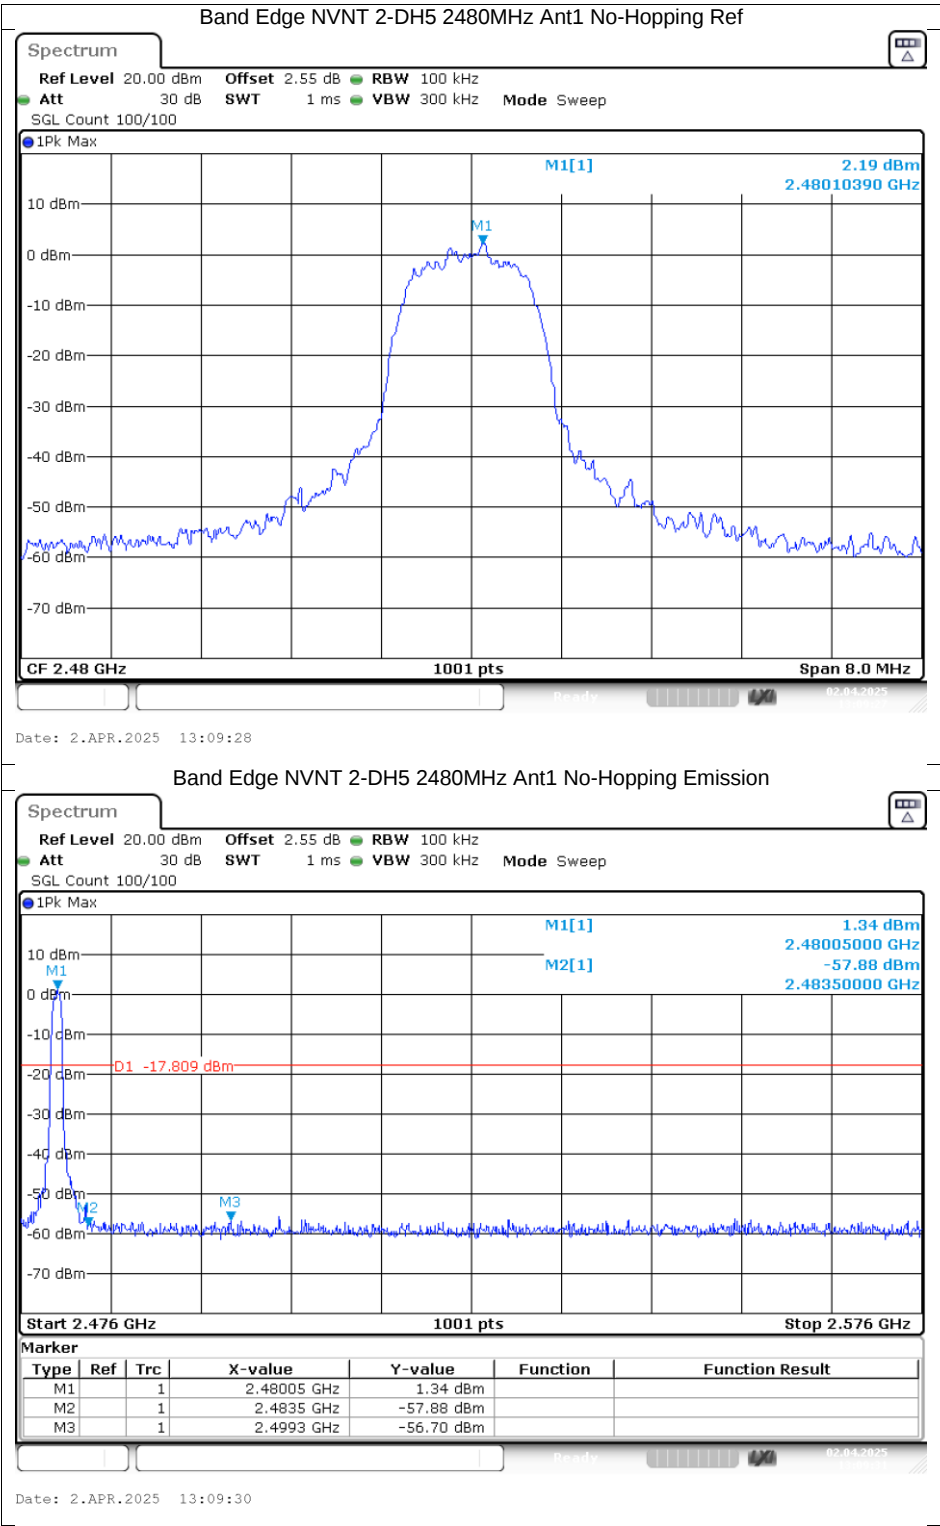


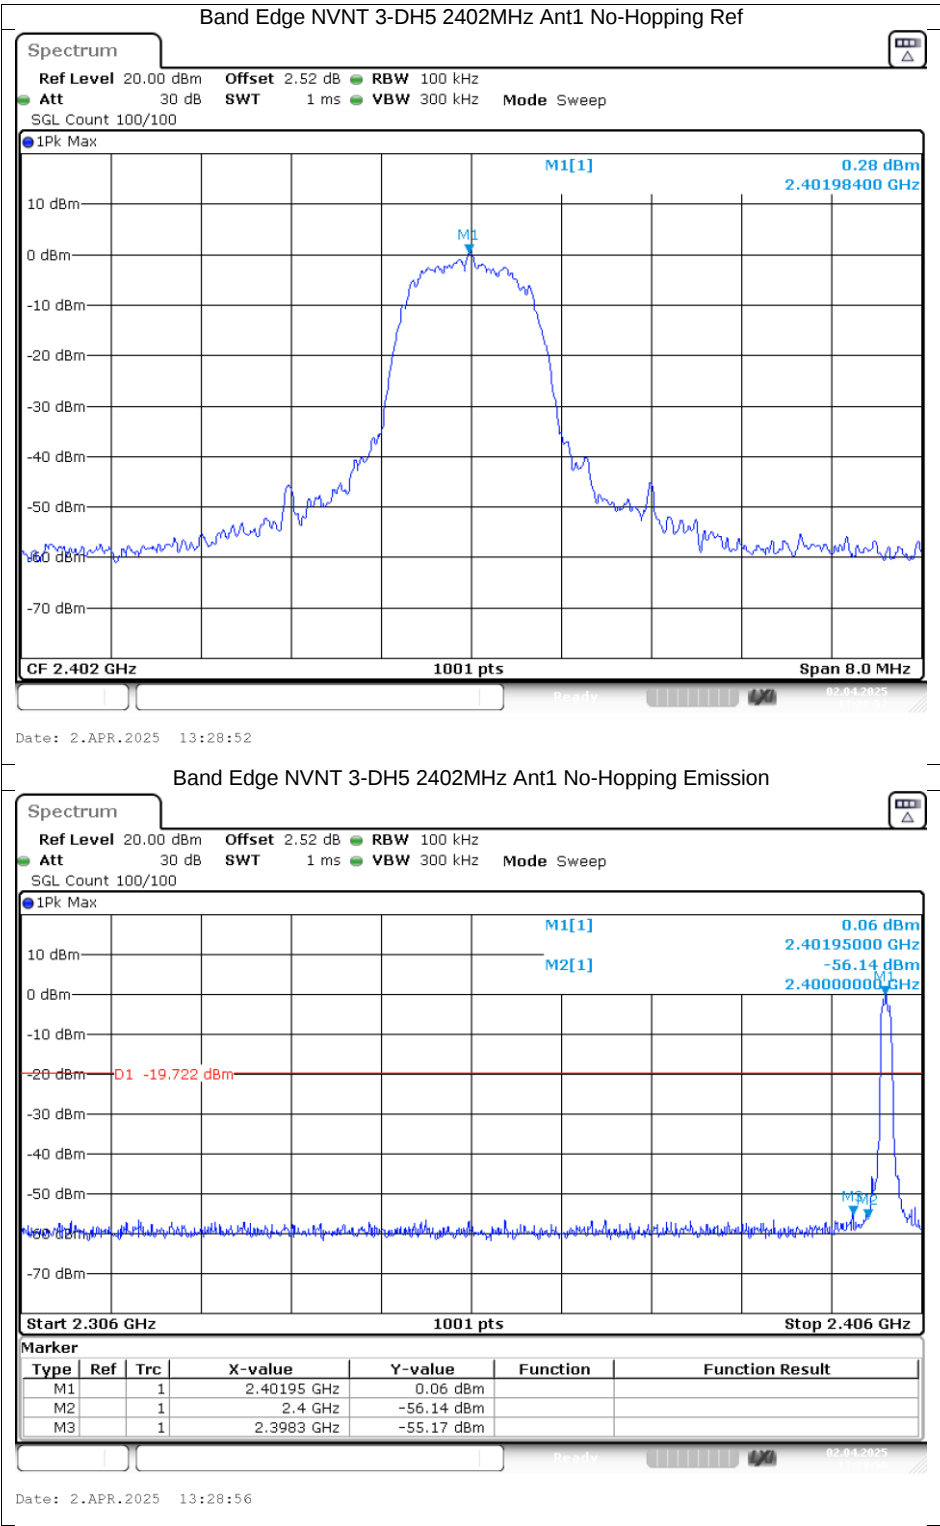


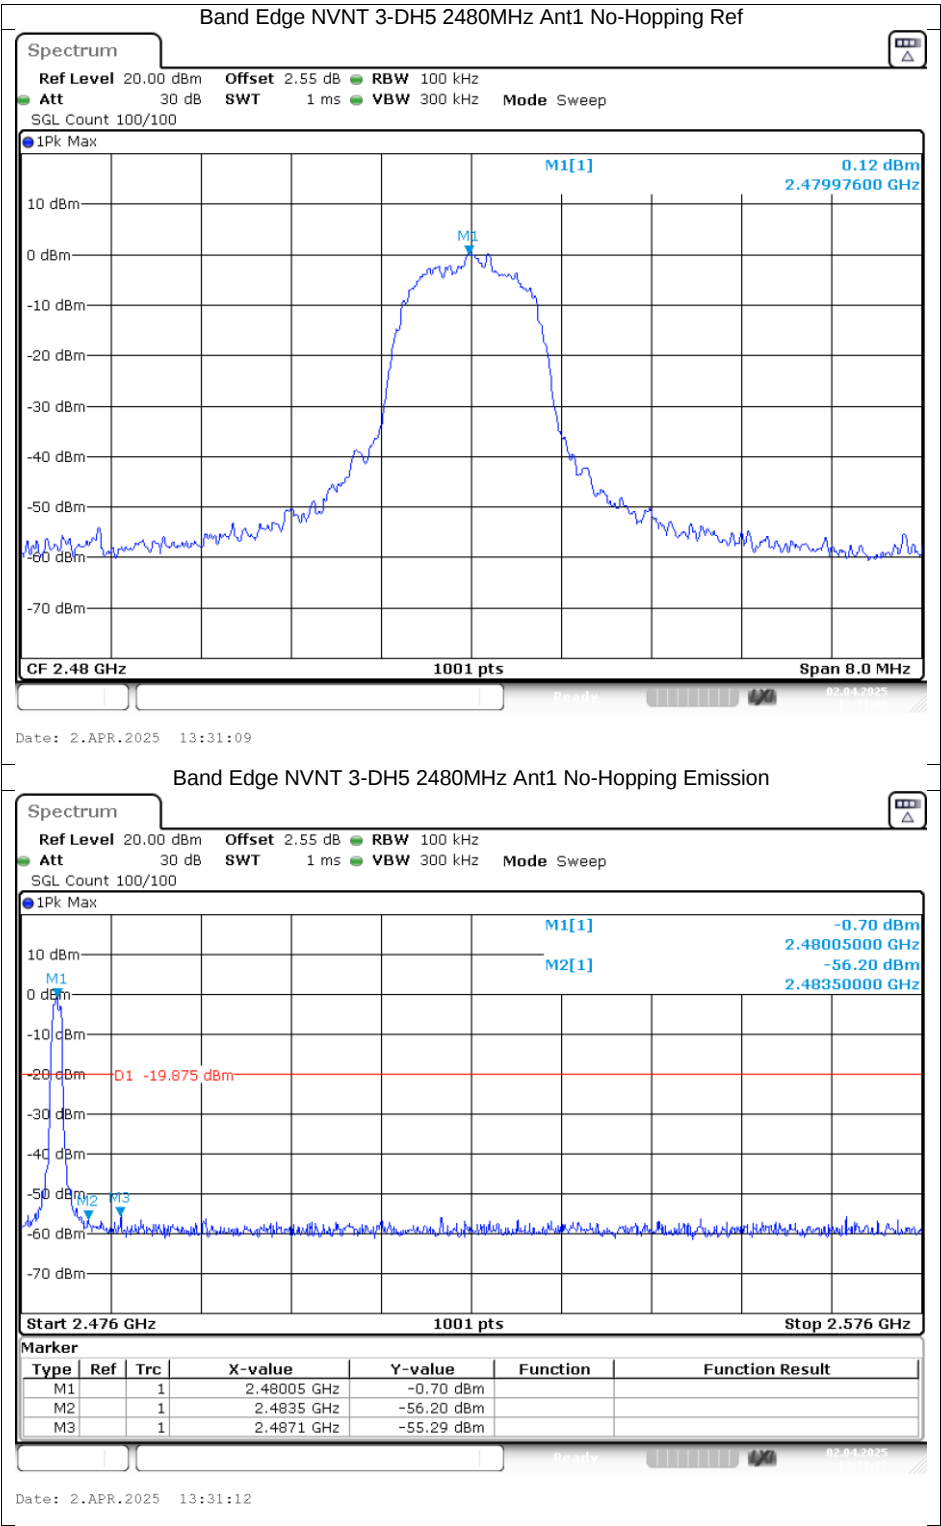


Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-56.7	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-58.02	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-55.41	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-55.32	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-55.21	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.72	-20	Pass

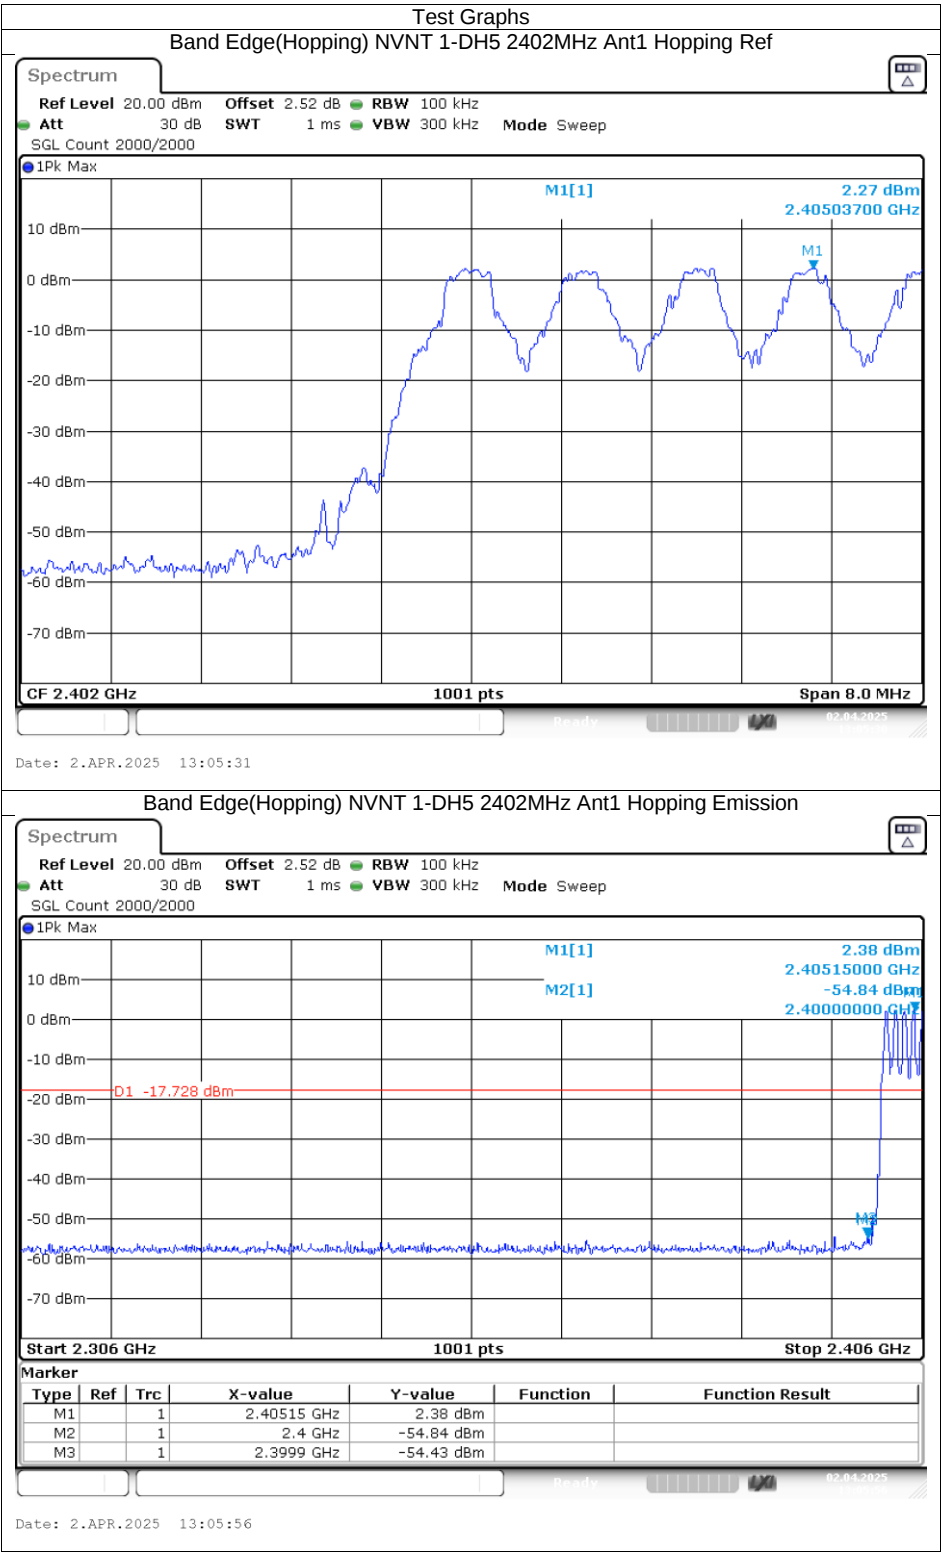


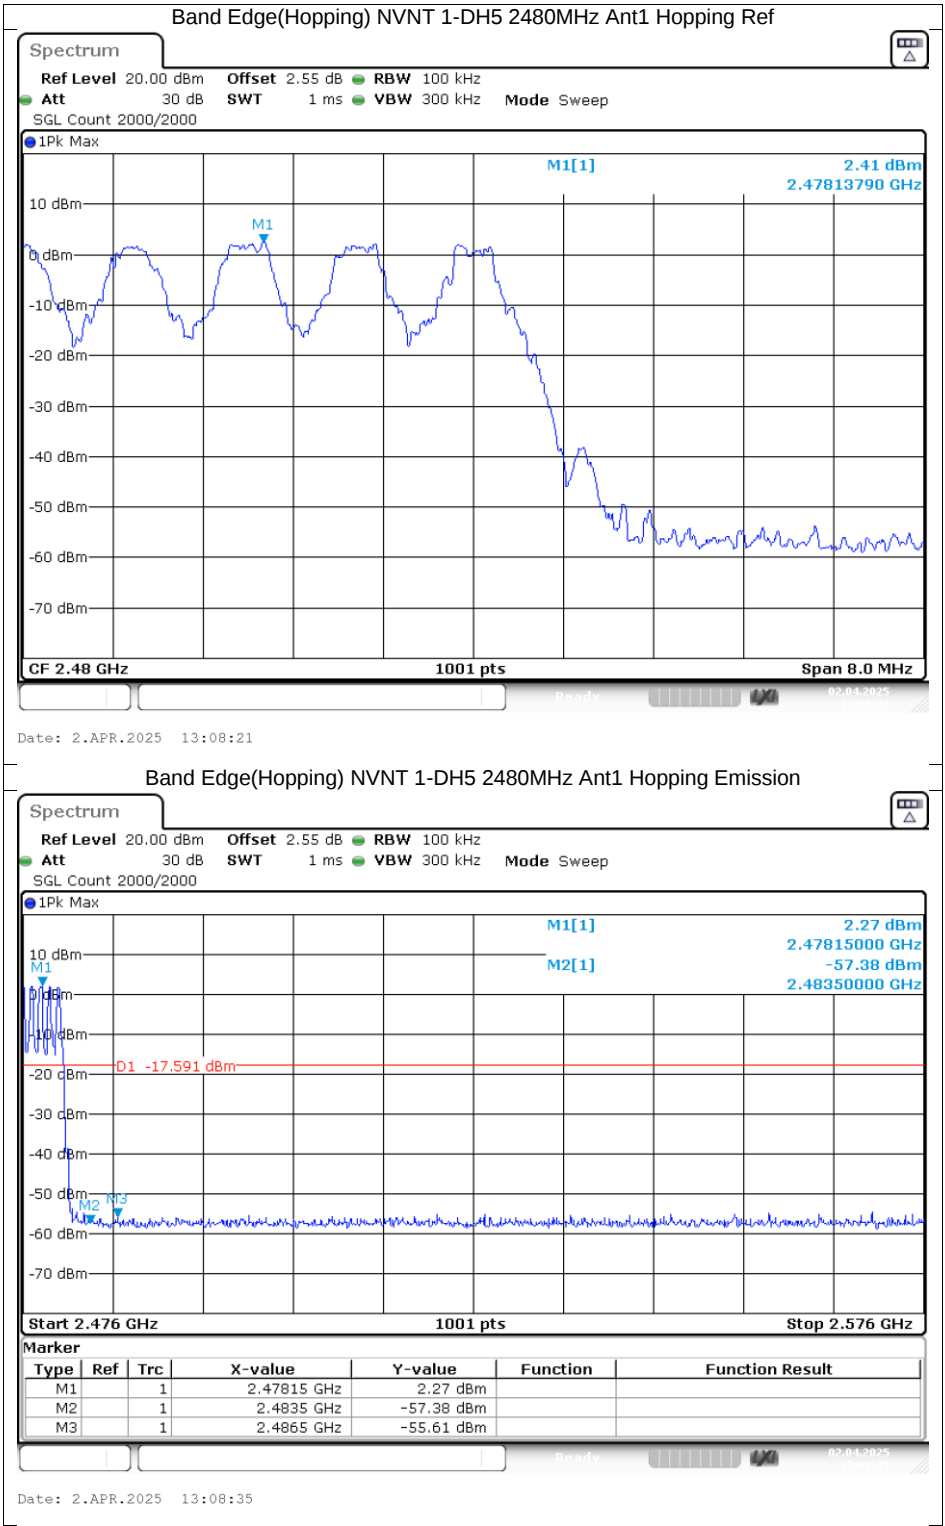

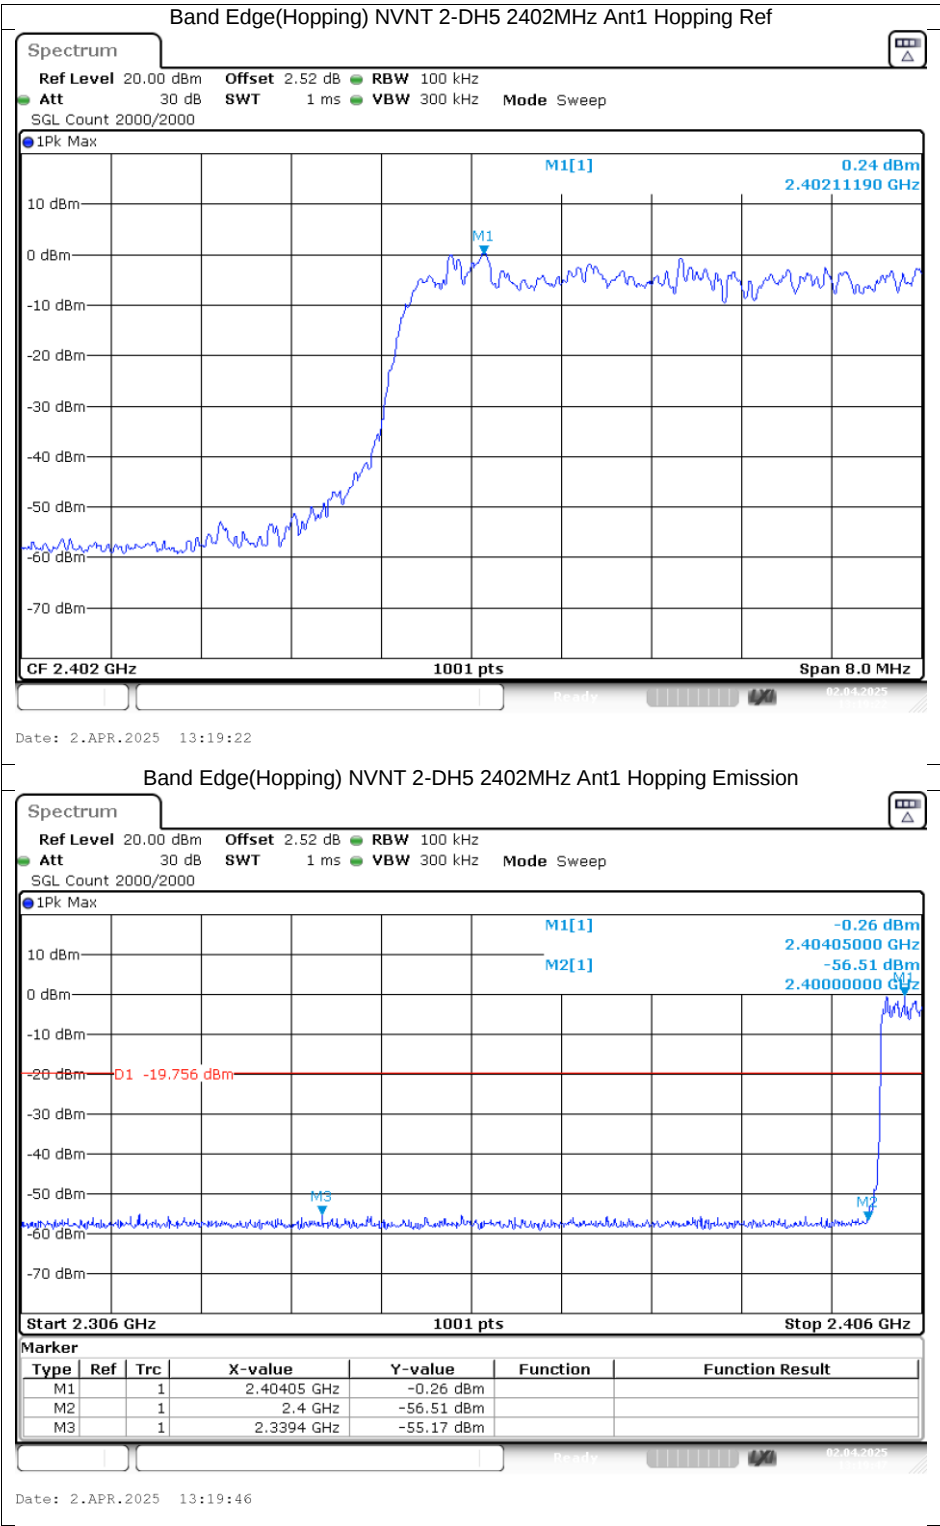



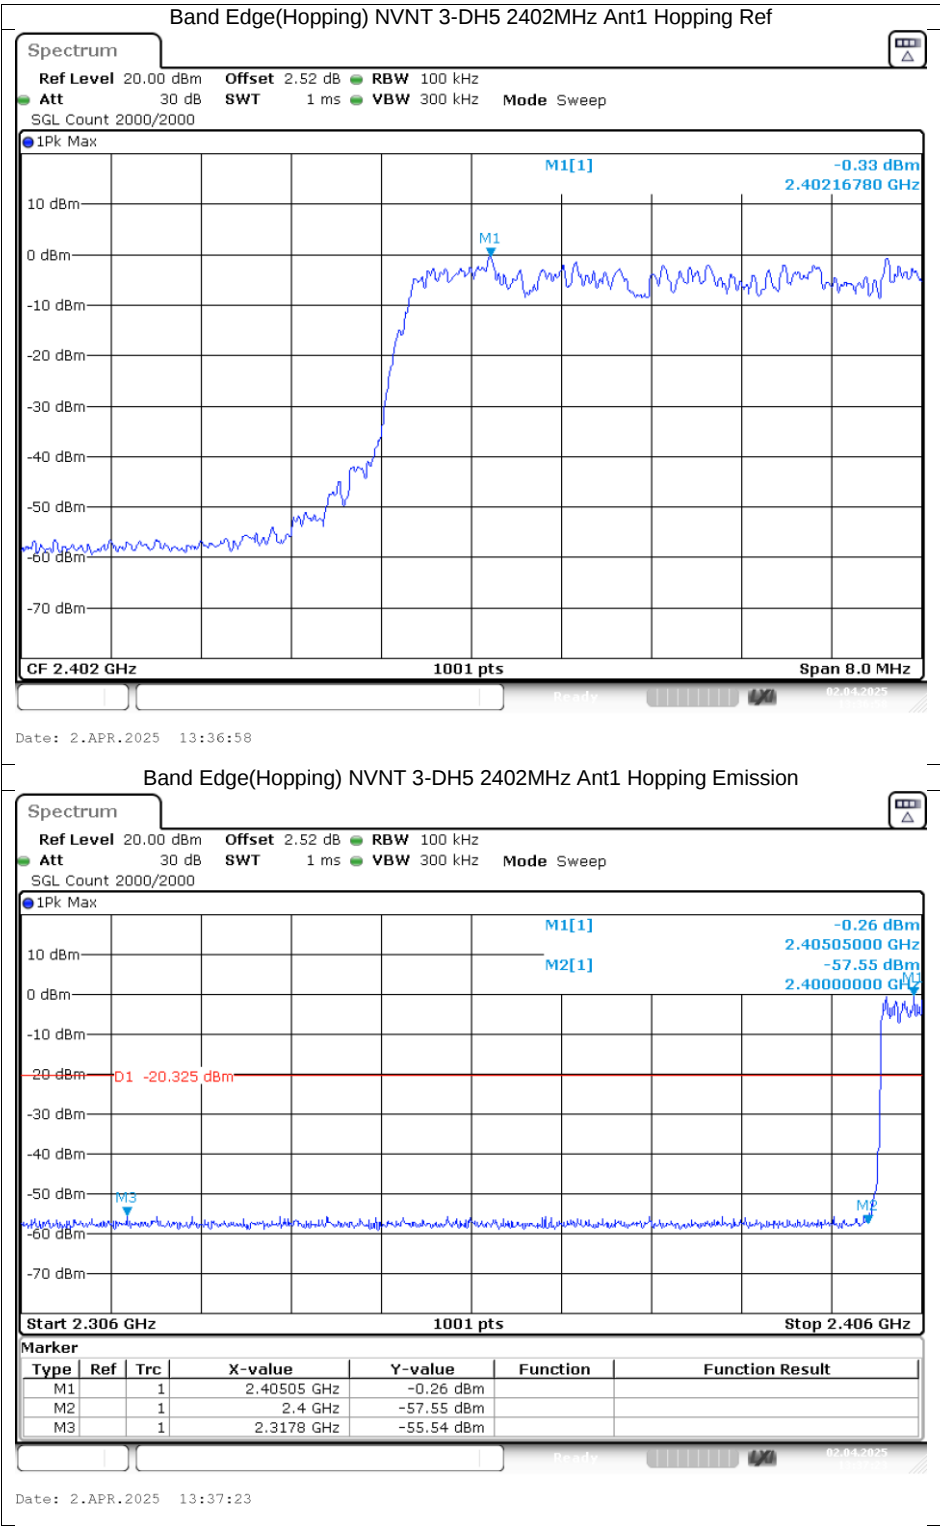

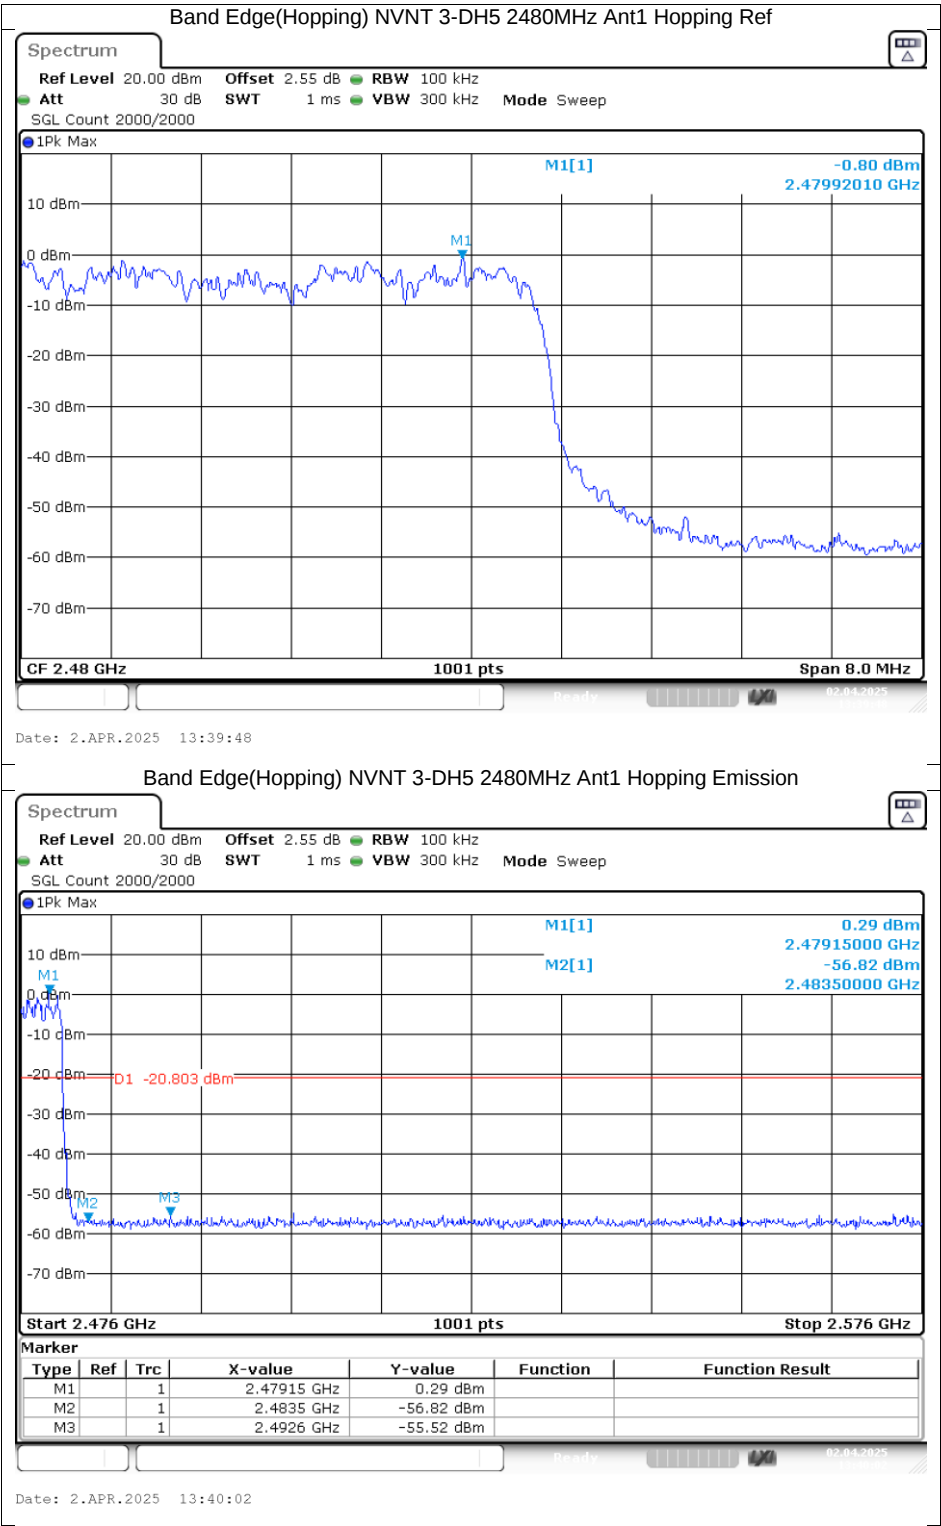

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-29.91	-20	Pass
NVNT	1-DH5	2441	Ant1	-31	-20	Pass
NVNT	1-DH5	2480	Ant1	-31.75	-20	Pass
NVNT	2-DH5	2402	Ant1	-33.59	-20	Pass
NVNT	2-DH5	2441	Ant1	-33.83	-20	Pass
NVNT	2-DH5	2480	Ant1	-33.9	-20	Pass
NVNT	3-DH5	2402	Ant1	-32.02	-20	Pass
NVNT	3-DH5	2441	Ant1	-31.25	-20	Pass
NVNT	3-DH5	2480	Ant1	-33.41	-20	Pass

