



## Appendix G

### RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Projector

Test Model: P6

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.3°C    |
| Relative Humidity: | 53.5%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Jay Luo   |
| Supervised by:     | Nick Peng |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## G.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant2    | 9.398                 | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5785            | Ant2    | 15.124                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5825            | Ant2    | 9.704                 | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 15.13                 | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5785            | Ant2    | 13.785                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 16.272                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 32.449                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5795            | Ant2    | 31.24                 | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | 12.496                | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | 12.54                 | $\geq 0.5$                  | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | 12.28                 | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | 28.716                | $\geq 0.5$                  | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | 32.532                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | 15.077                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | 14.089                | $\geq 0.5$                  | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | 16.777                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | 33.757                | $\geq 0.5$                  | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | 37.208                | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant2

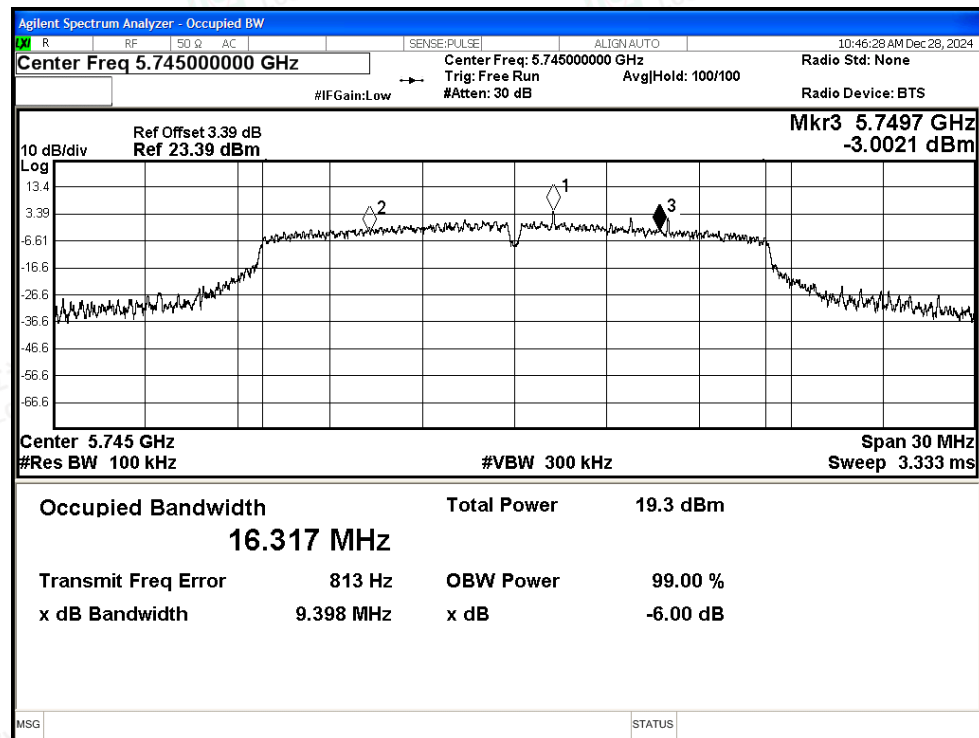

-6dB Bandwidth NVNT a 5785MHz Ant2

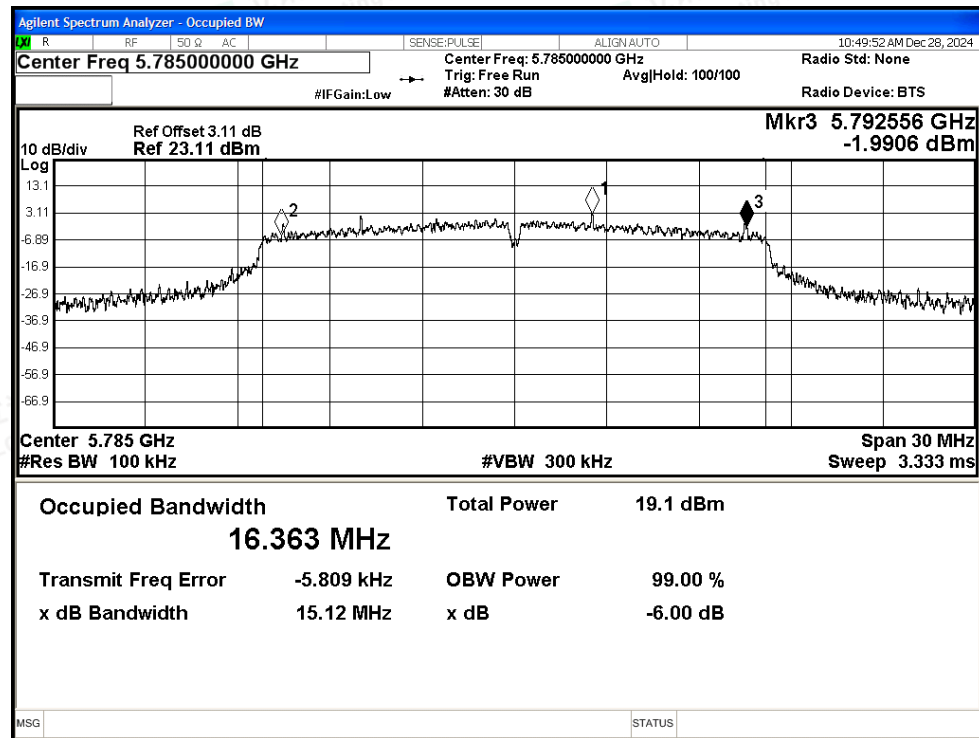

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT a 5825MHz Ant2

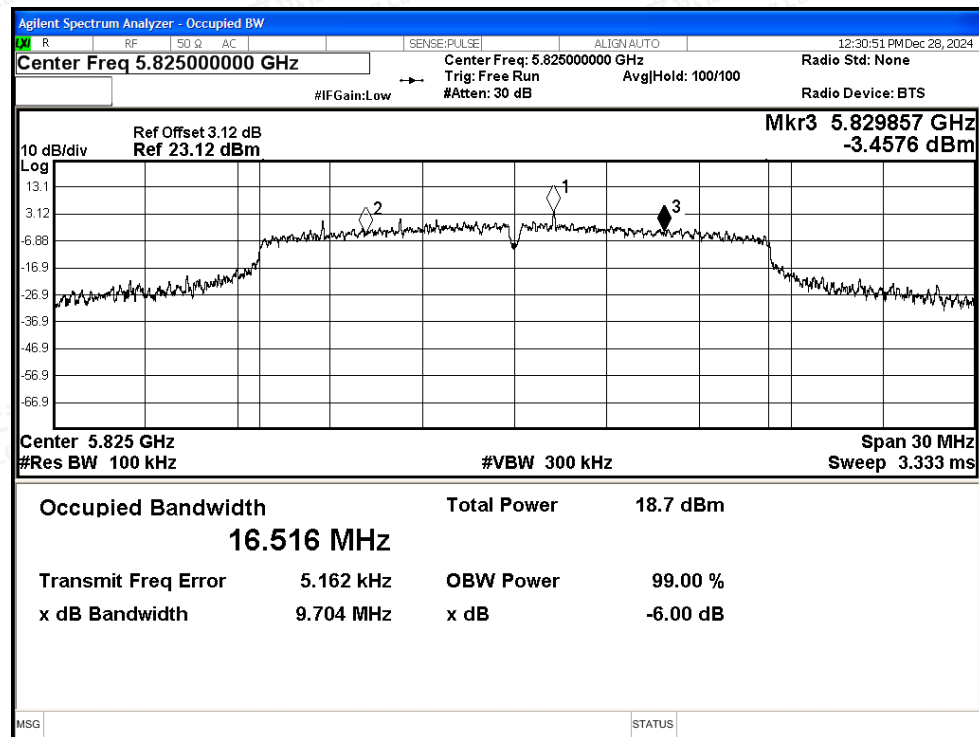

## -6dB Bandwidth NVNT n20 5745MHz Ant2

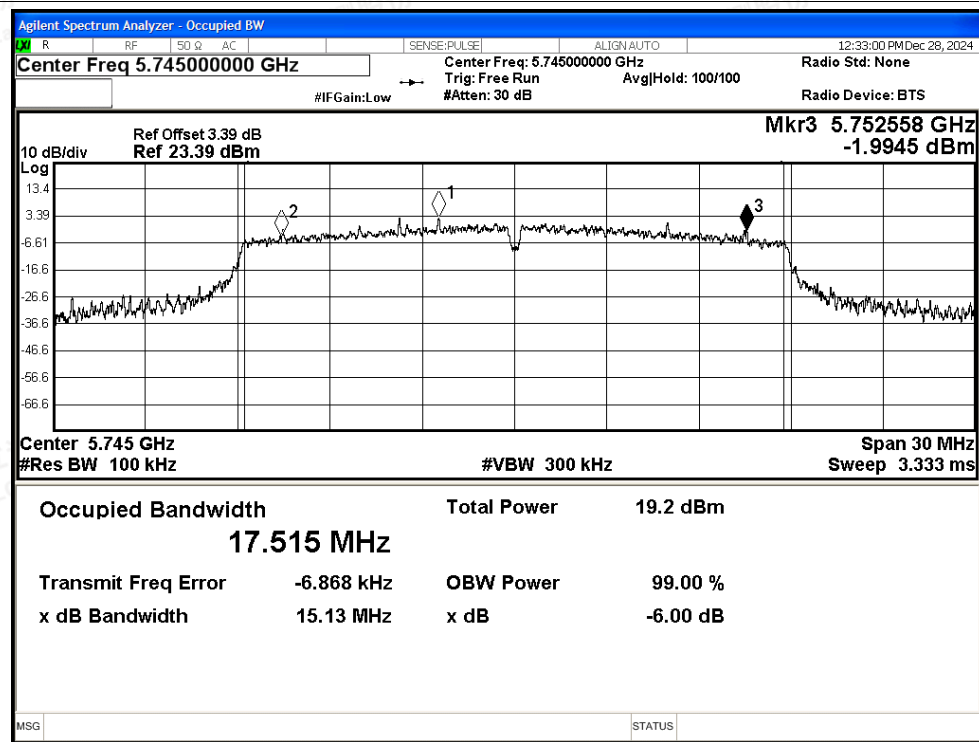

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n20 5785MHz Ant2

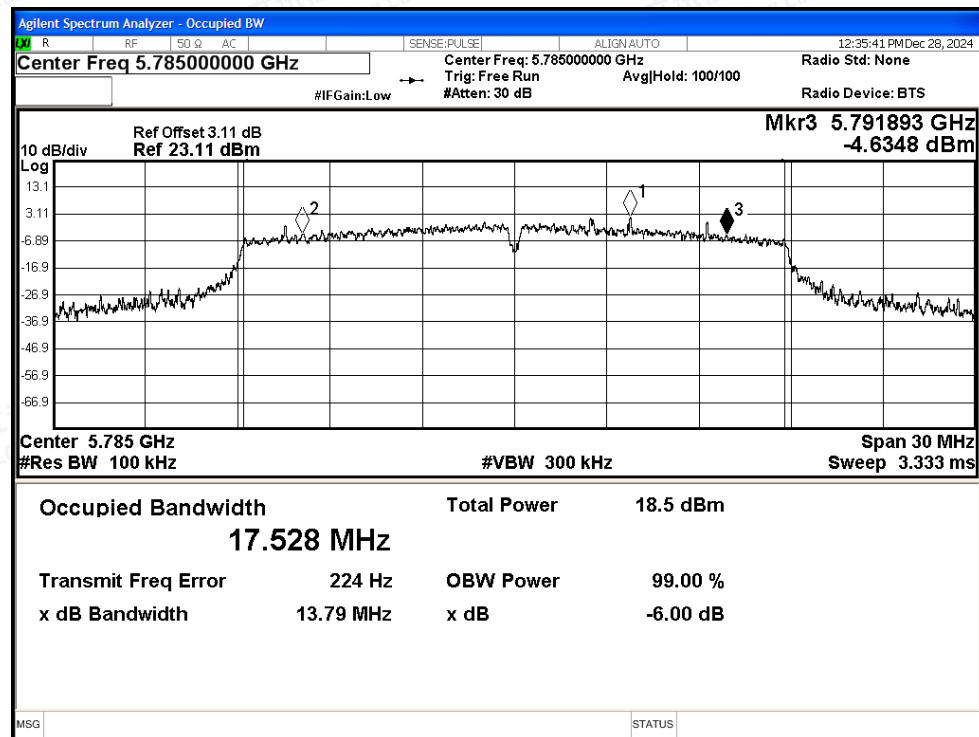

## -6dB Bandwidth NVNT n20 5825MHz Ant2

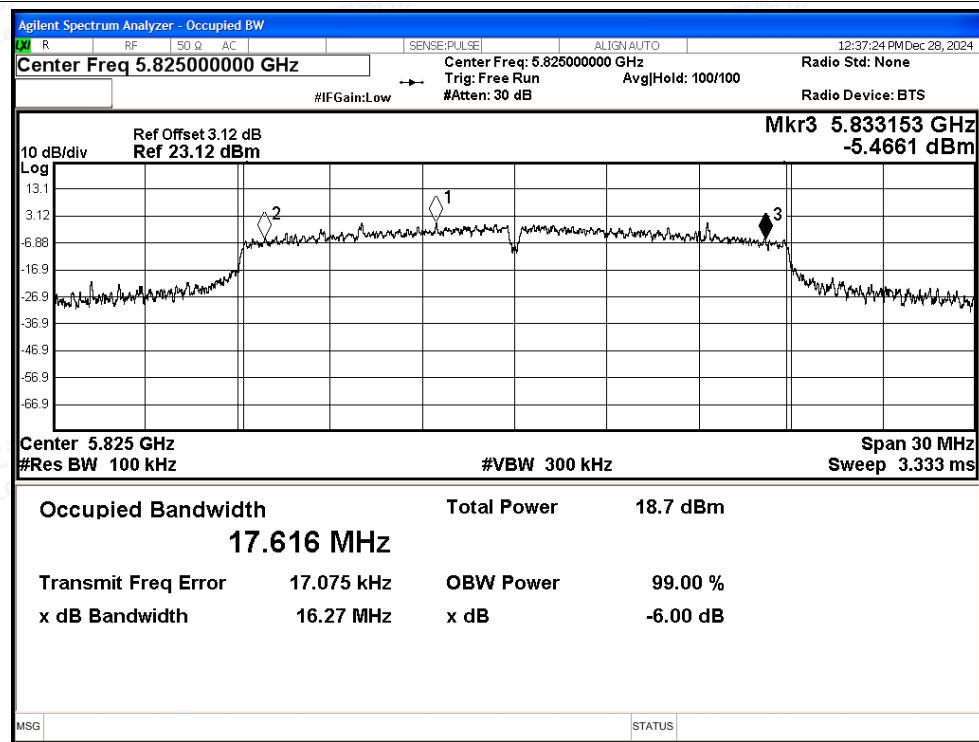

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n40 5755MHz Ant2

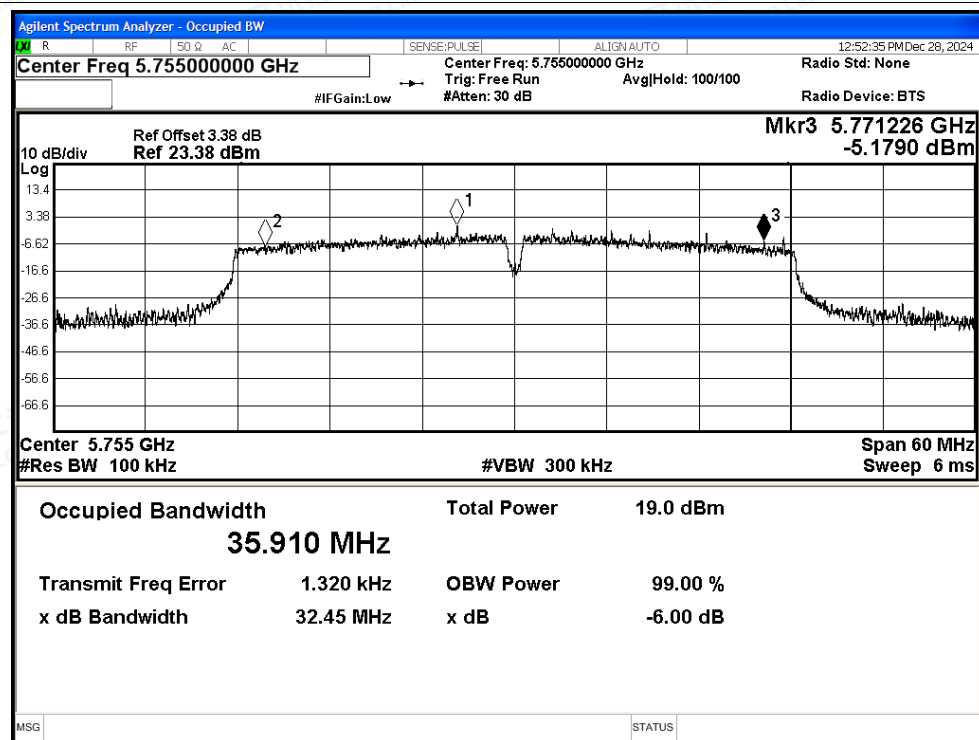

## -6dB Bandwidth NVNT n40 5795MHz Ant2

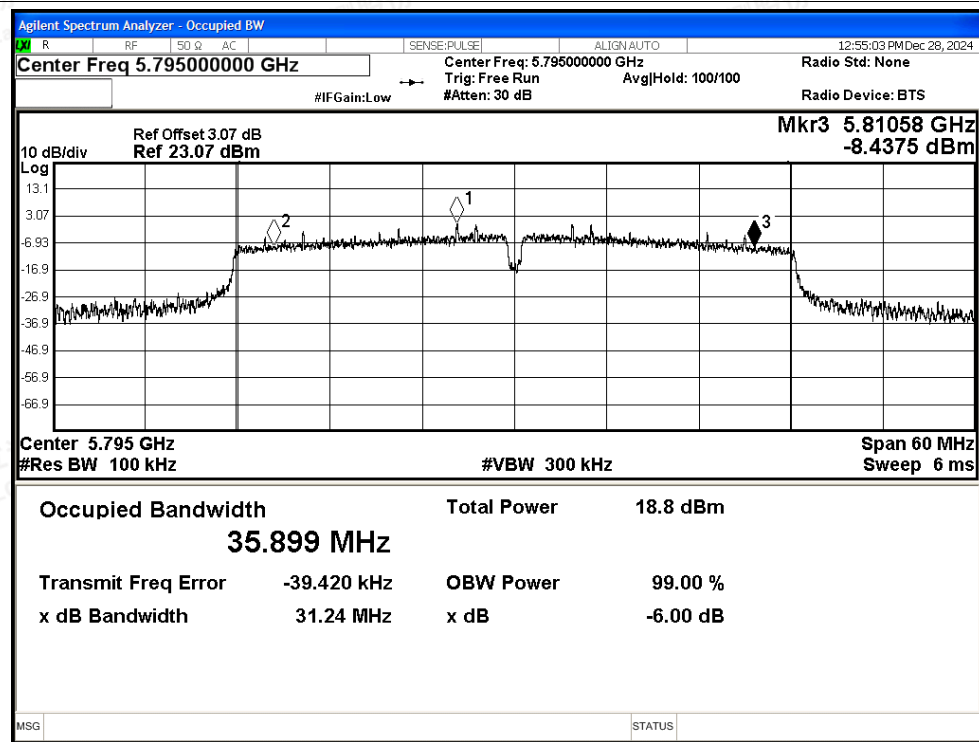

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ac20 5745MHz Ant2

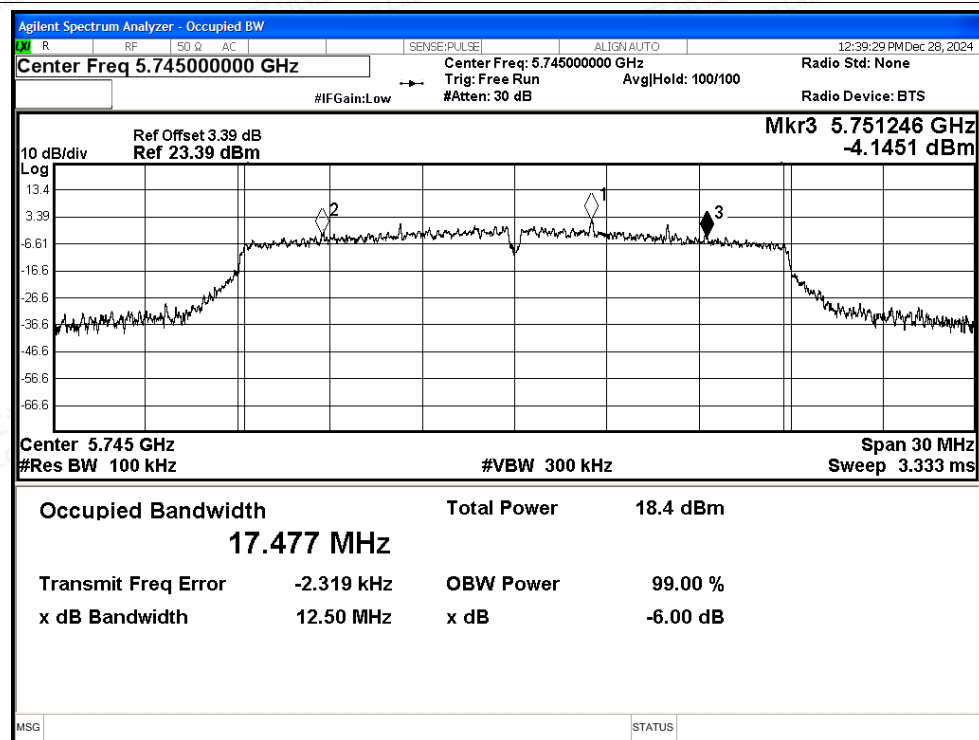


## -6dB Bandwidth NVNT ac20 5785MHz Ant2

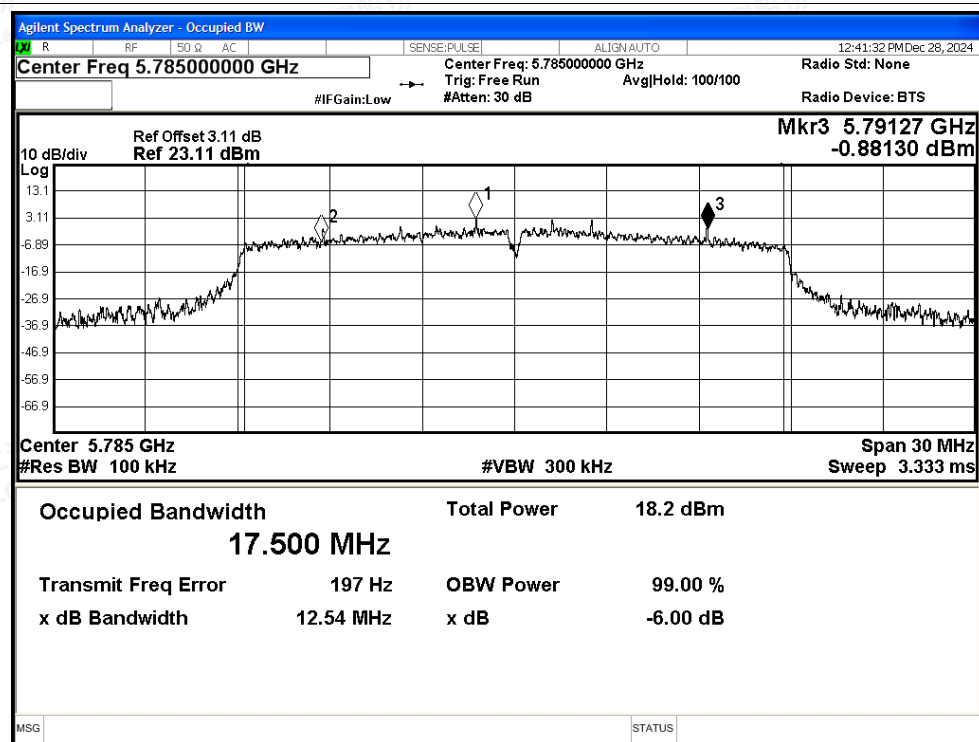




## -6dB Bandwidth NVNT ac20 5825MHz Ant2

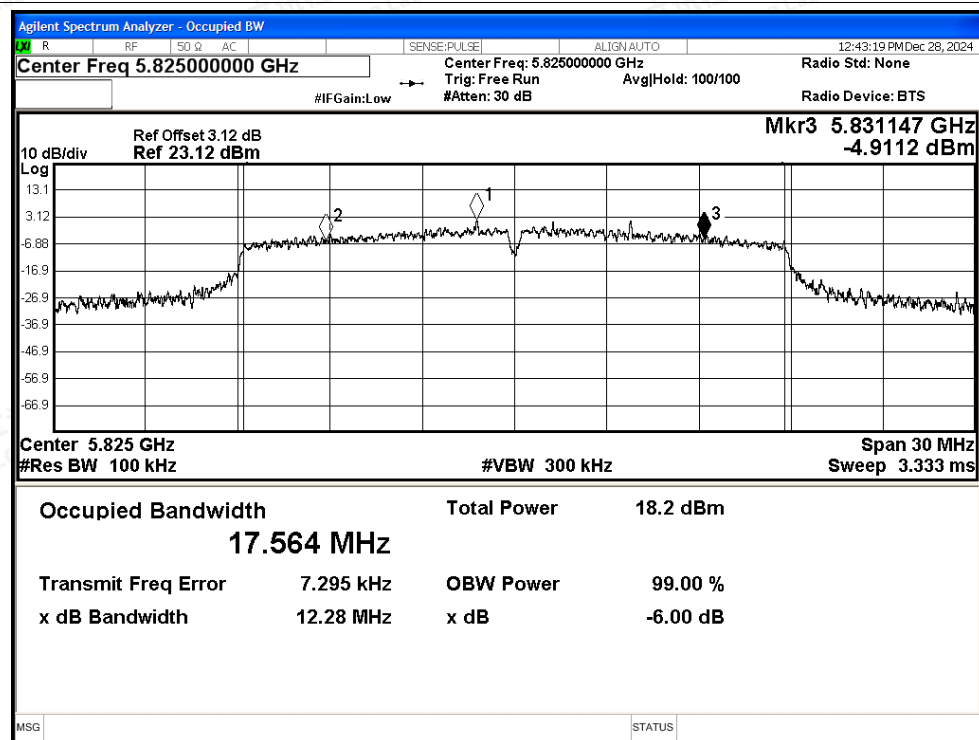

## -6dB Bandwidth NVNT ac40 5755MHz Ant2

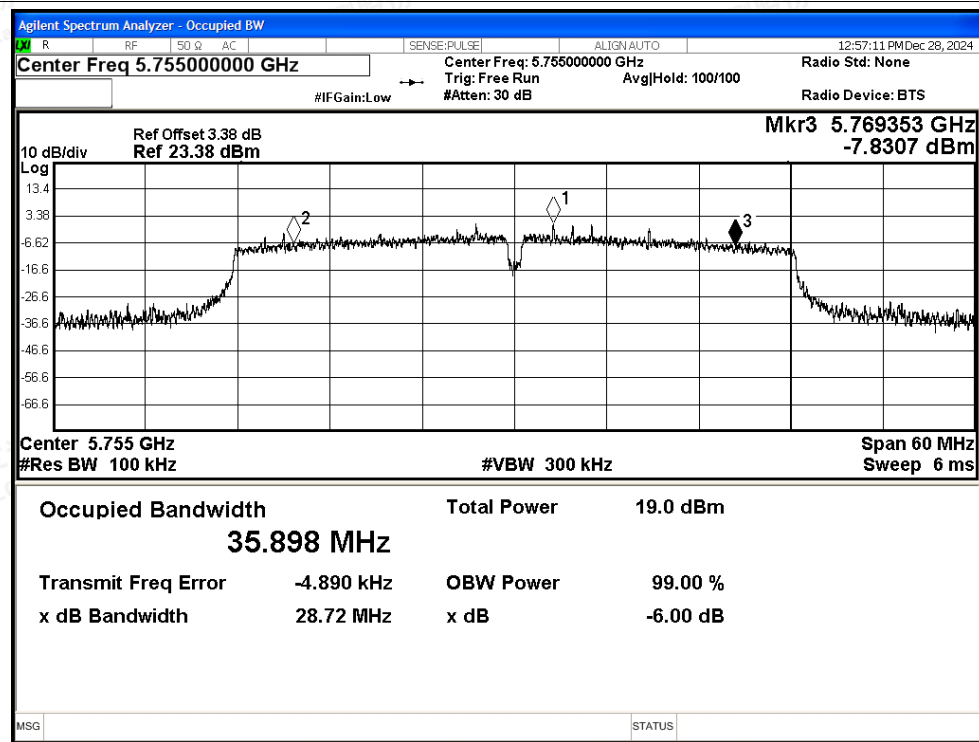

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ac40 5795MHz Ant2

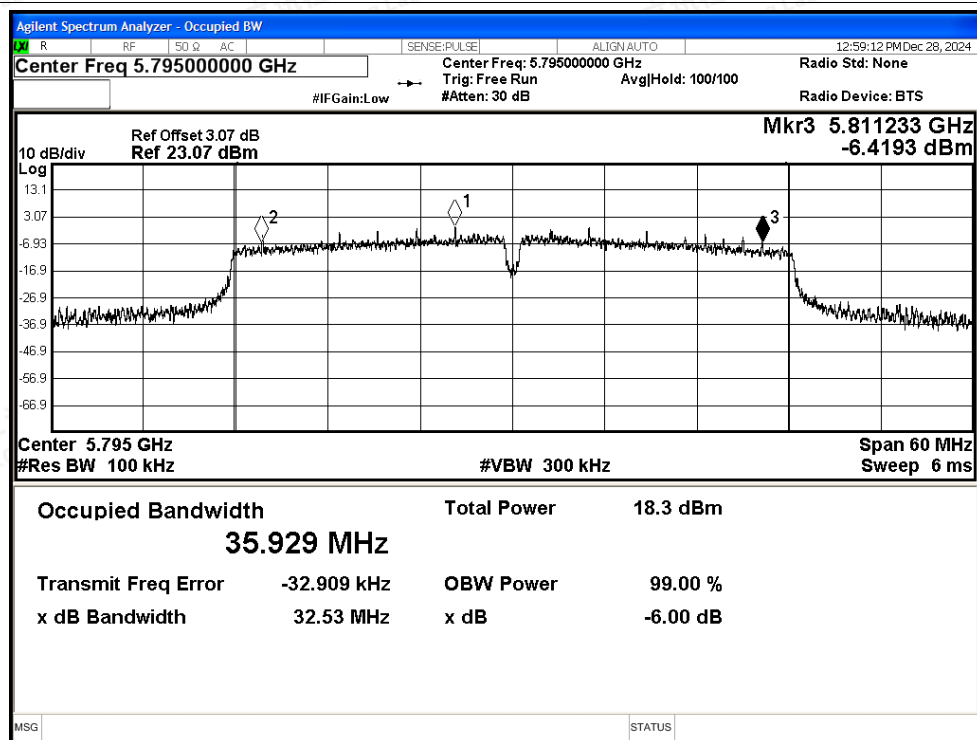

## -6dB Bandwidth NVNT ax20 5745MHz Ant2

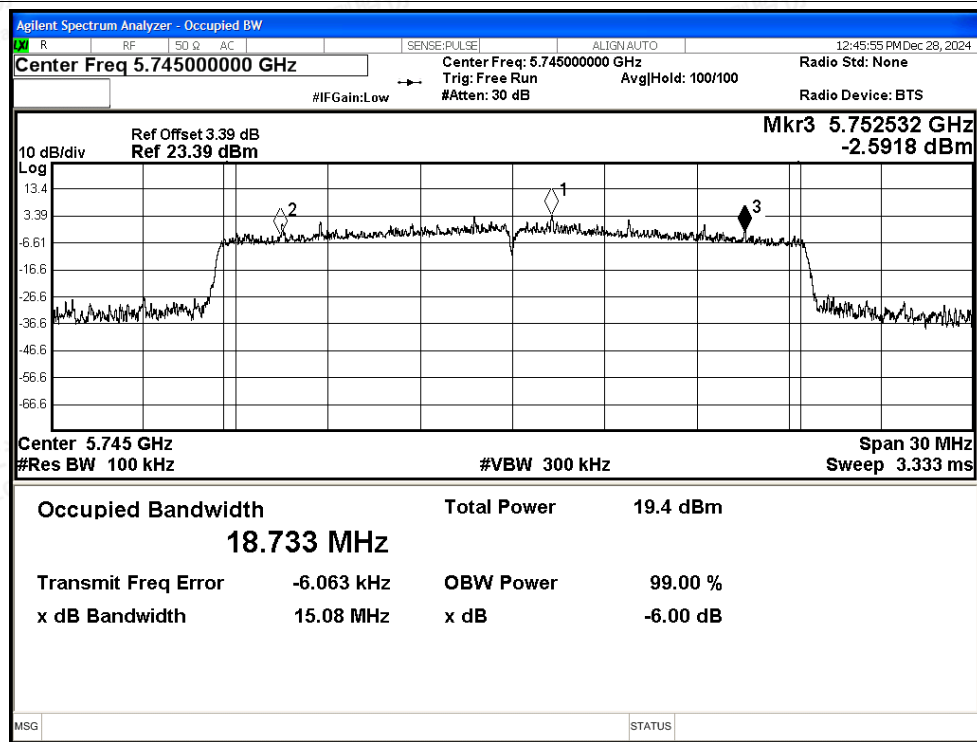

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax20 5785MHz Ant2

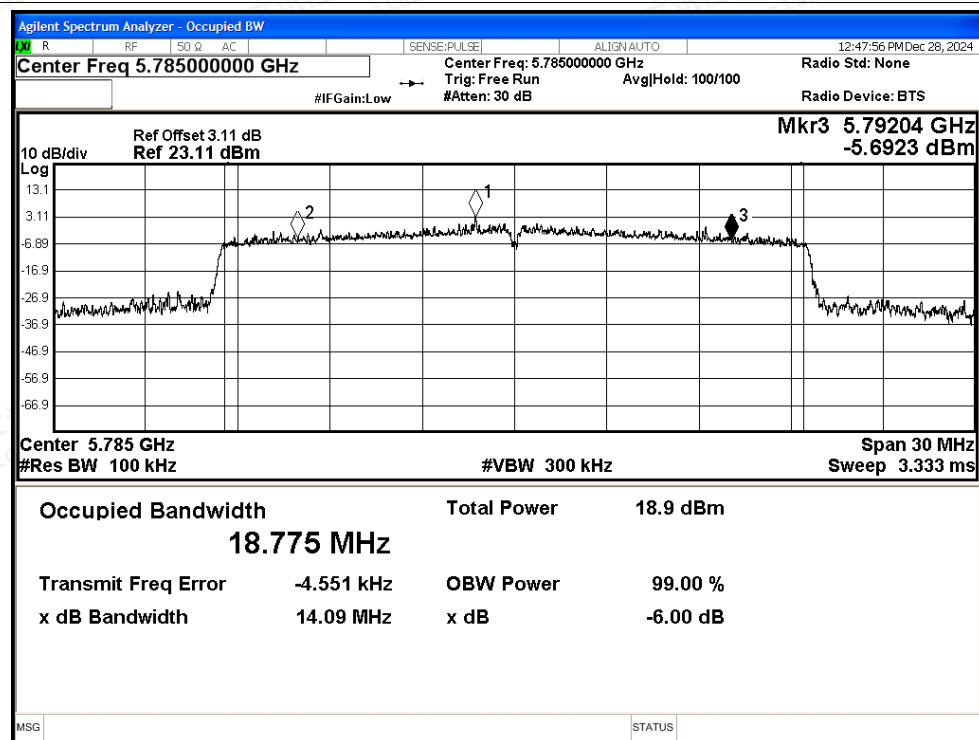

## -6dB Bandwidth NVNT ax20 5825MHz Ant2

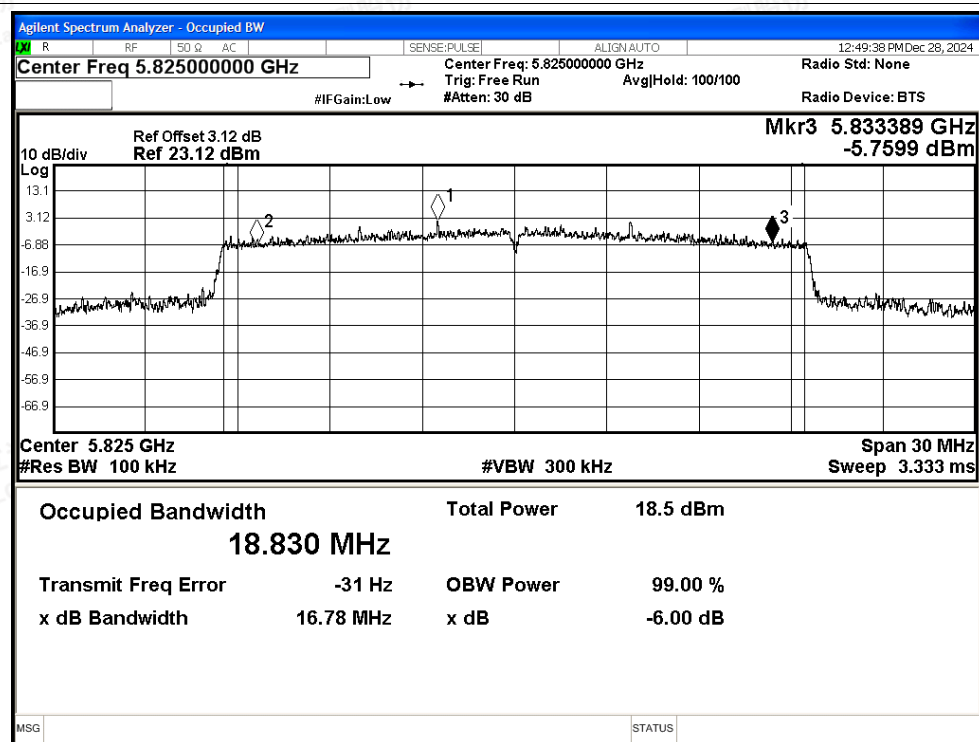

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT ax40 5755MHz Ant2

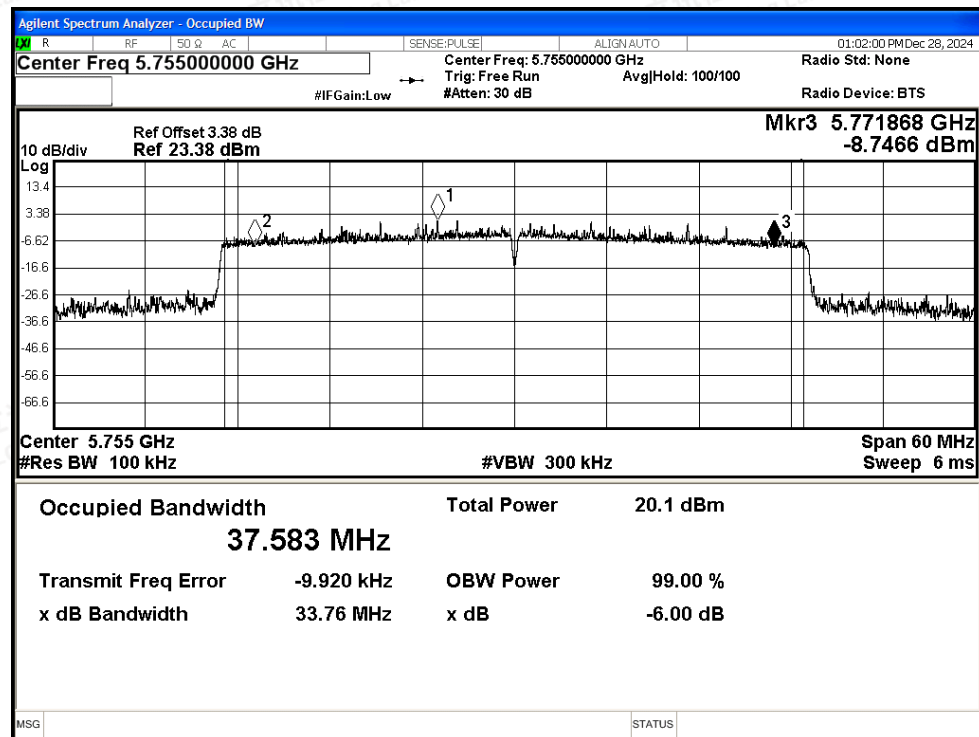

## -6dB Bandwidth NVNT ax40 5795MHz Ant2

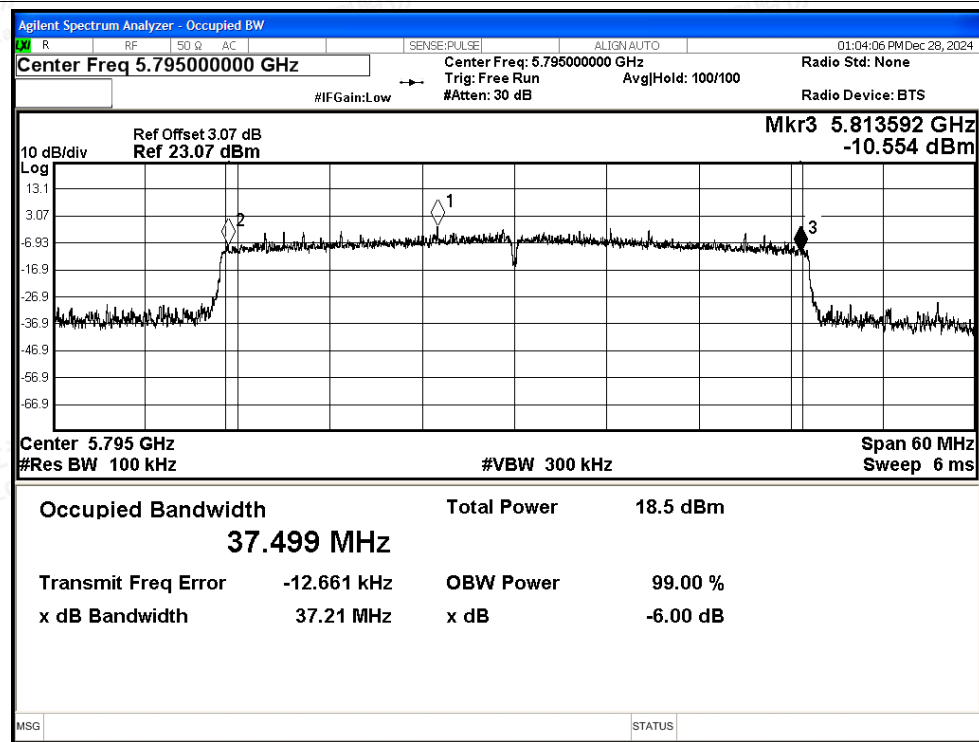

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant2    | 12.06                 | 1.48             | 13.54             | 30          | Pass    |
| NVNT      | a    | 5785            | Ant2    | 12.05                 | 1.38             | 13.43             | 30          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 11.9                  | 1.48             | 13.38             | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 11.15                 | 1.63             | 12.78             | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant2    | 11.3                  | 1.47             | 12.77             | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 11.35                 | 1.58             | 12.93             | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 10.54                 | 2.6              | 13.14             | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant2    | 10.22                 | 2.78             | 13                | 30          | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | 11.3                  | 1.46             | 12.76             | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | 11.13                 | 1.57             | 12.7              | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | 10.9                  | 1.57             | 12.47             | 30          | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | 10.71                 | 2.59             | 13.3              | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | 10.27                 | 2.61             | 12.88             | 30          | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | 11.67                 | 1.96             | 13.63             | 30          | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | 11.05                 | 1.84             | 12.89             | 30          | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | 11.34                 | 1.92             | 13.26             | 30          | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | 11.07                 | 3.24             | 14.31             | 30          | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | 9.97                  | 3.07             | 13.04             | 30          | Pass    |





### G.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD(dBm/500KHz) | Duty Factor (dB) | Total PSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
|-----------|------|-----------------|---------|---------------------------|------------------|------------------------|--------------------|---------|
| NVNT      | a    | 5745            | Ant2    | 0.3                       | 1.48             | 1.78                   | 30                 | Pass    |
| NVNT      | a    | 5785            | Ant2    | -0.23                     | 1.38             | 1.15                   | 30                 | Pass    |
| NVNT      | a    | 5825            | Ant2    | -0.75                     | 1.48             | 0.73                   | 30                 | Pass    |
| NVNT      | n20  | 5745            | Ant2    | -0.24                     | 1.63             | 1.39                   | 30                 | Pass    |
| NVNT      | n20  | 5785            | Ant2    | -0.65                     | 1.47             | 0.82                   | 30                 | Pass    |
| NVNT      | n20  | 5825            | Ant2    | -0.55                     | 1.58             | 1.03                   | 30                 | Pass    |
| NVNT      | n40  | 5755            | Ant2    | -4.39                     | 2.6              | -1.79                  | 30                 | Pass    |
| NVNT      | n40  | 5795            | Ant2    | -4.47                     | 2.78             | -1.69                  | 30                 | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | -1.04                     | 1.46             | 0.42                   | 30                 | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | -1.03                     | 1.57             | 0.54                   | 30                 | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | -0.91                     | 1.57             | 0.66                   | 30                 | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | -4.88                     | 2.59             | -2.29                  | 30                 | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | -5.16                     | 2.61             | -2.55                  | 30                 | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | -0.55                     | 1.96             | 1.41                   | 30                 | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | -0.19                     | 1.84             | 1.65                   | 30                 | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | -1.12                     | 1.92             | 0.8                    | 30                 | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | -4.72                     | 3.24             | -1.48                  | 30                 | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | -6.13                     | 3.07             | -3.06                  | 30                 | Pass    |






## Test Graphs

## PSD NVNT a 5745MHz Ant2

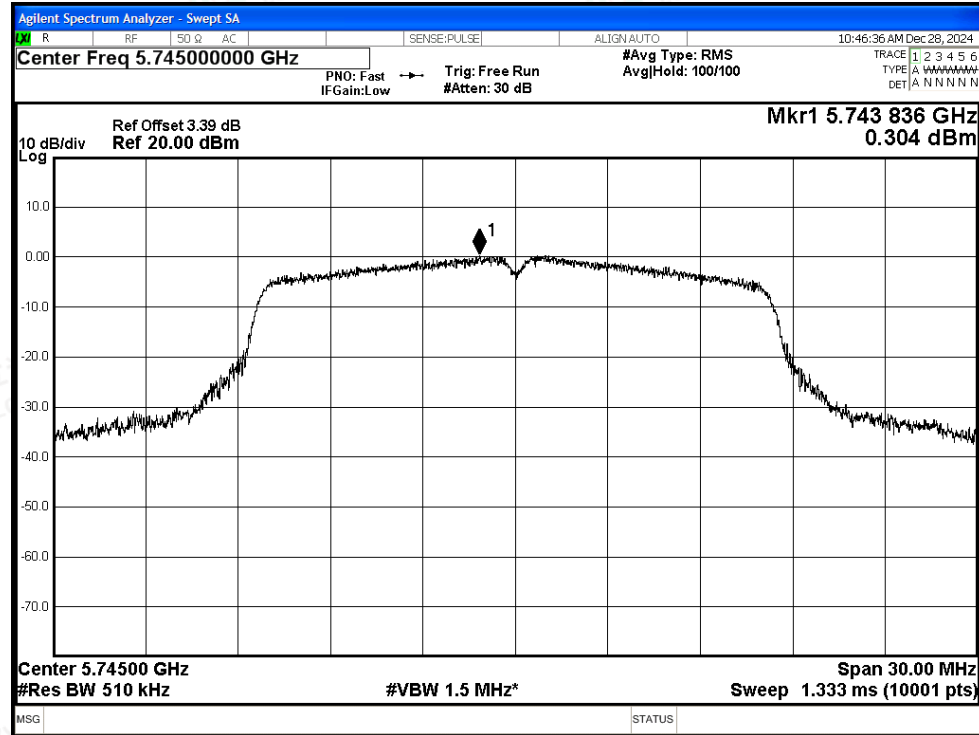


## PSD NVNT a 5785MHz Ant2

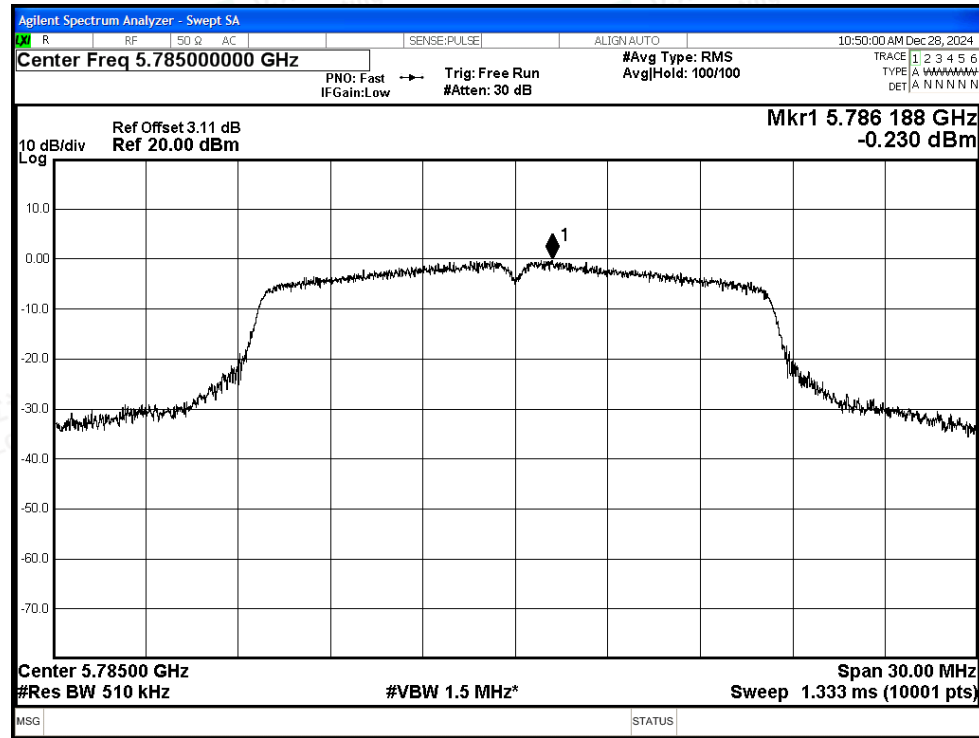








PSD NVNT a 5825MHz Ant2


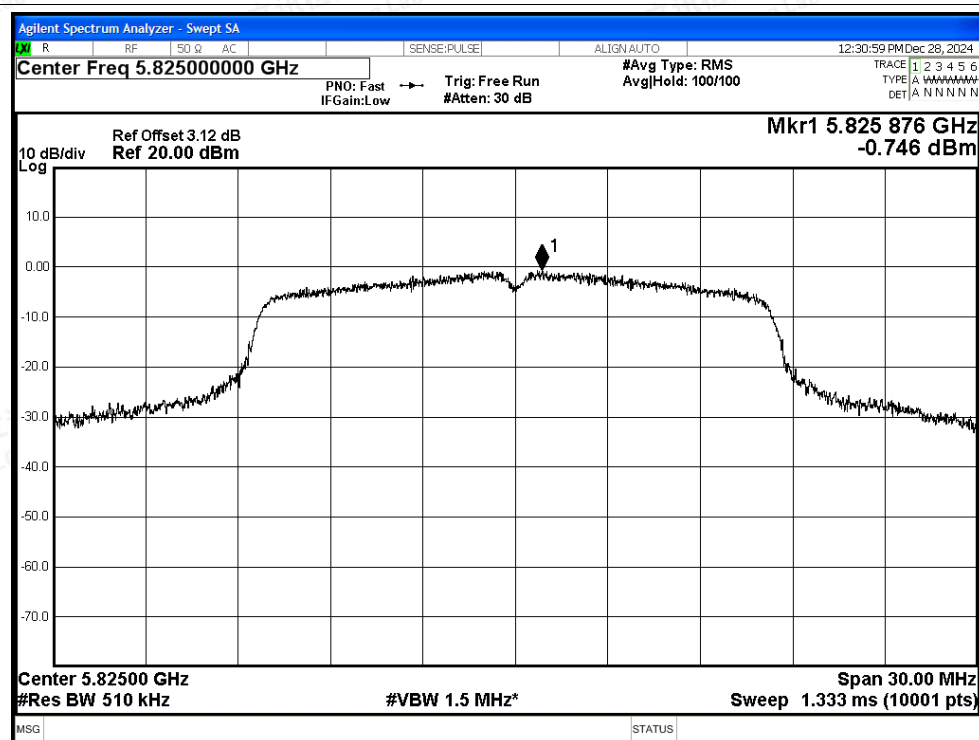




PSD NVNT n20 5745MHz Ant2

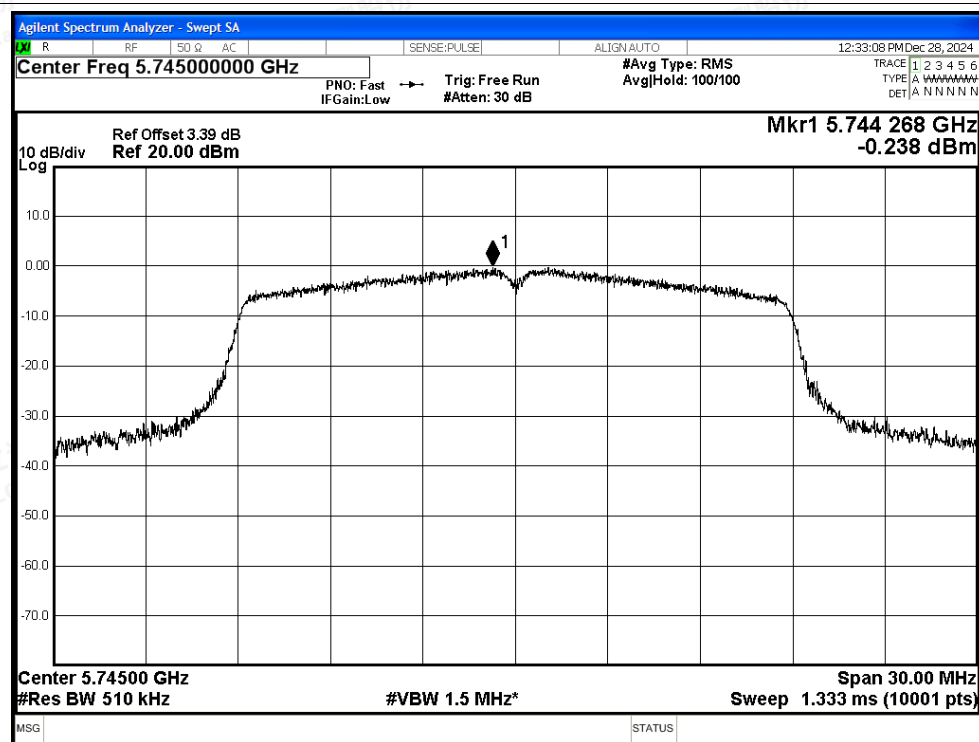

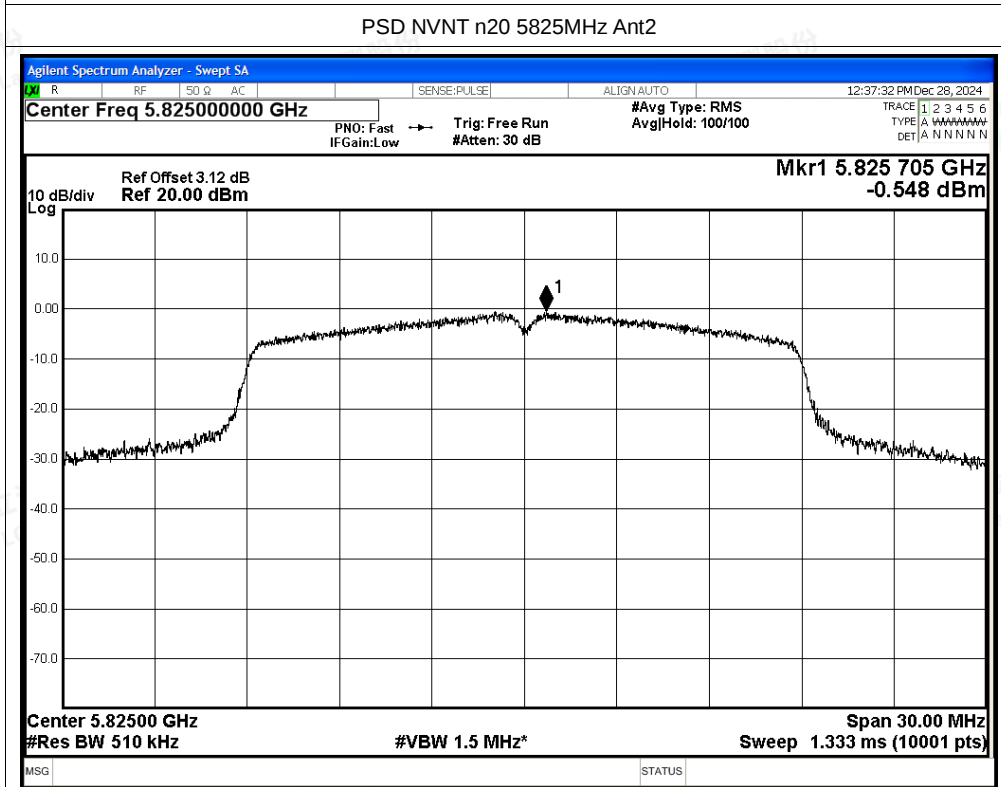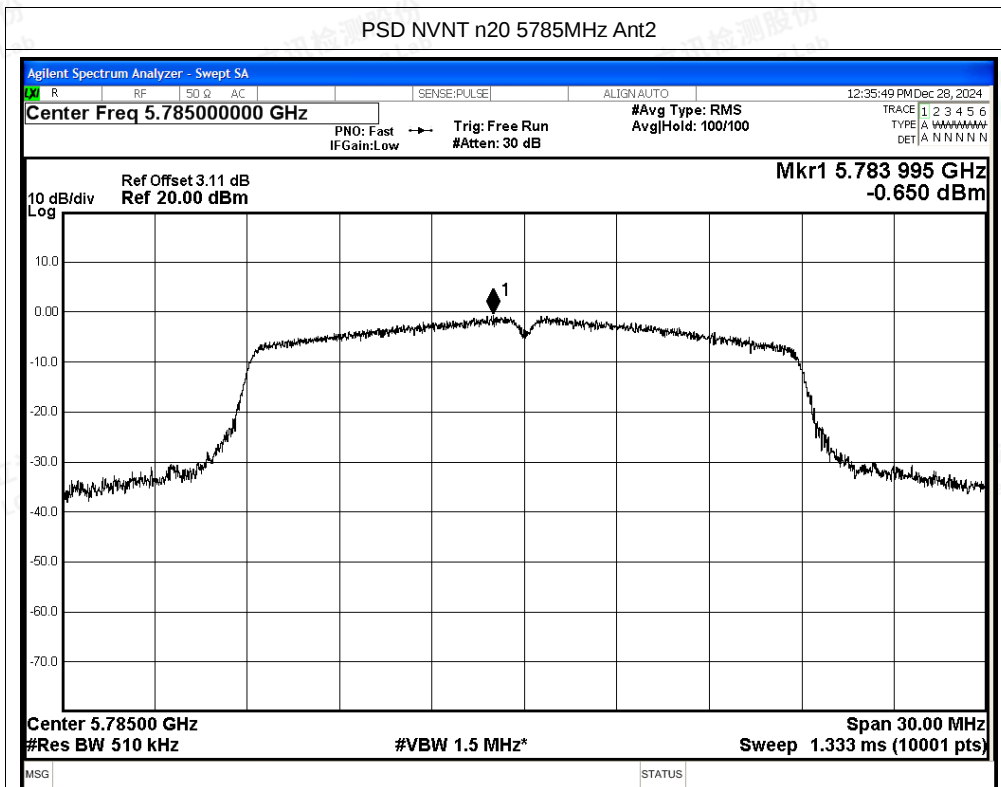

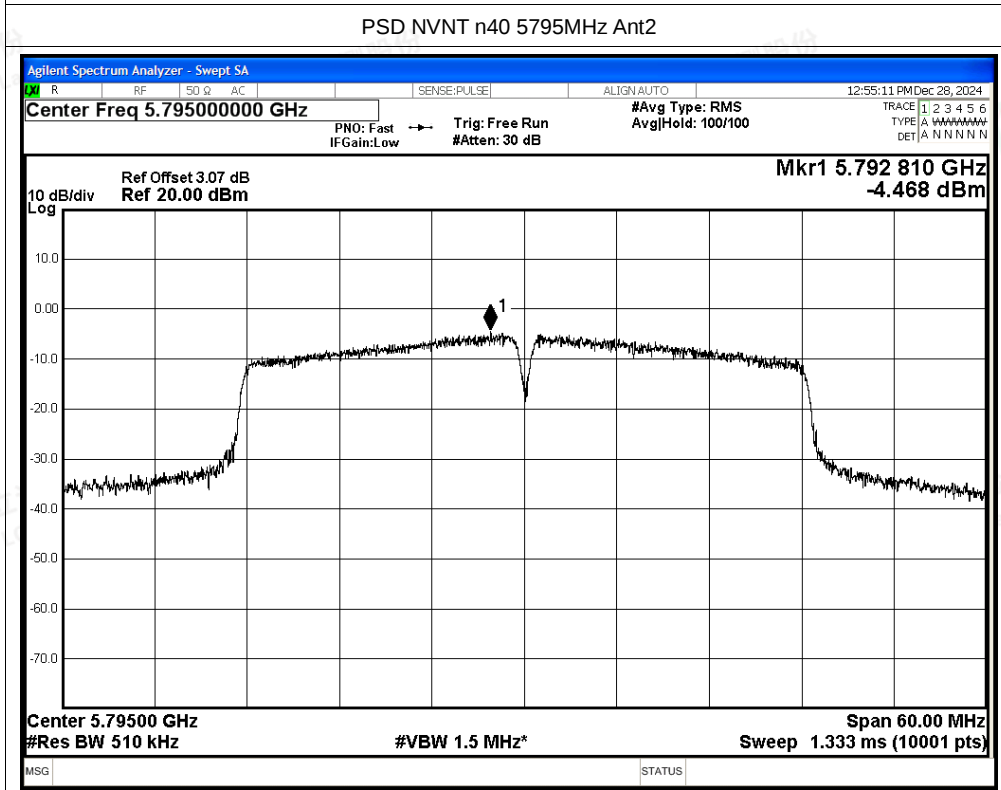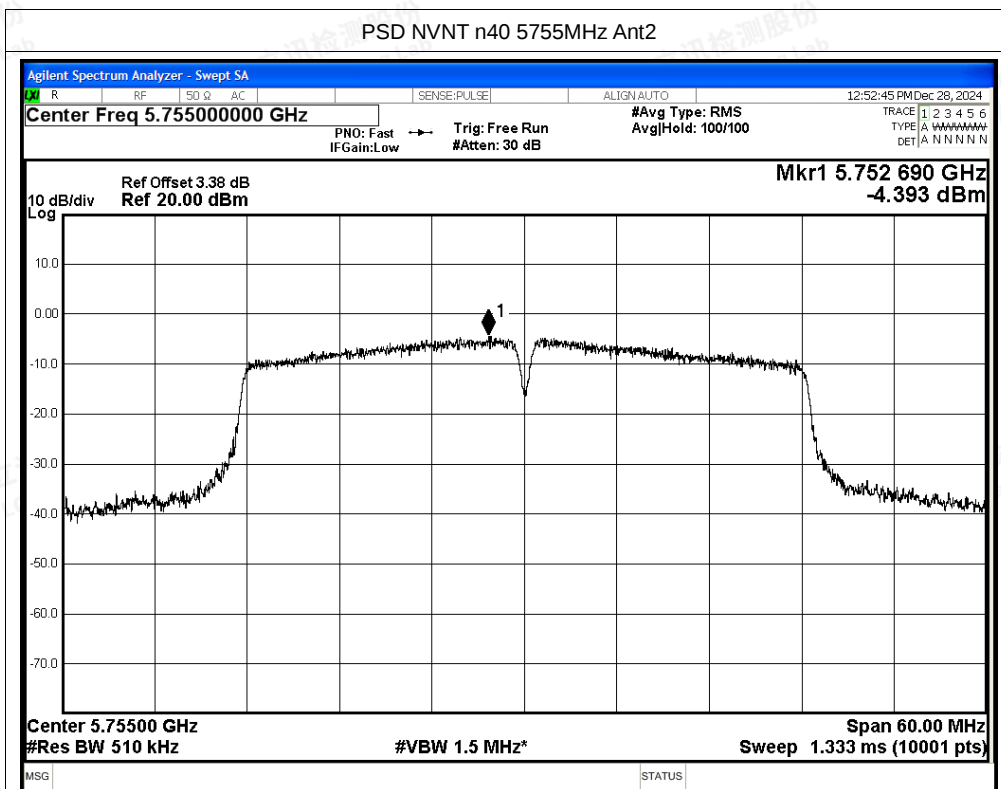


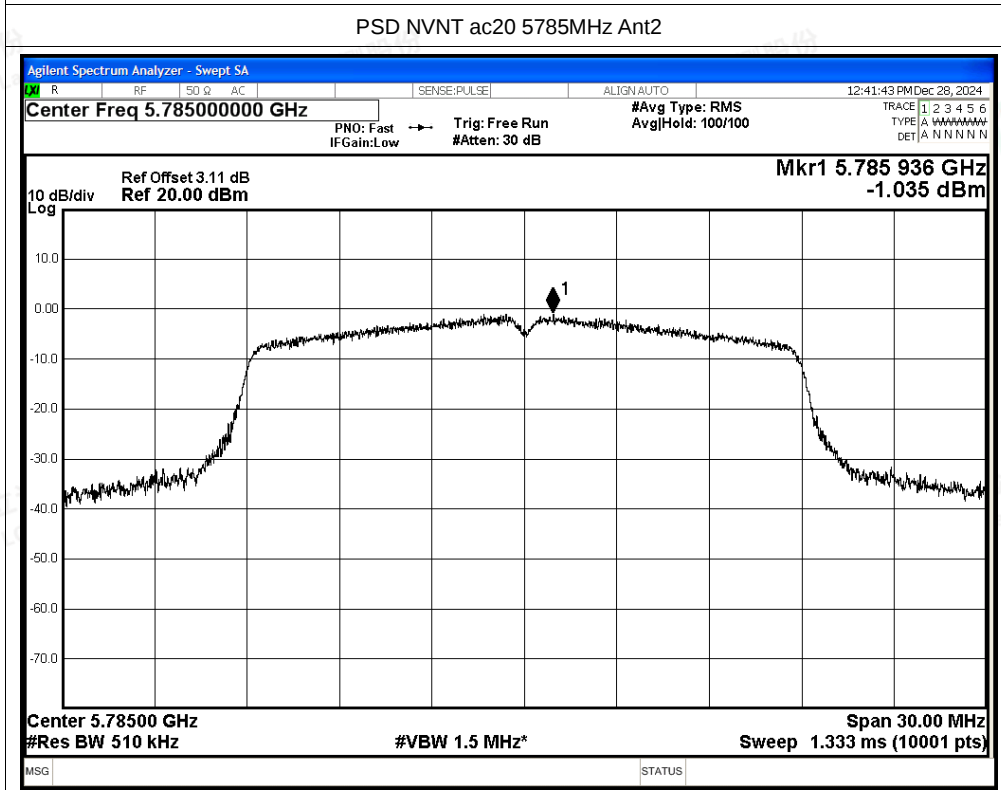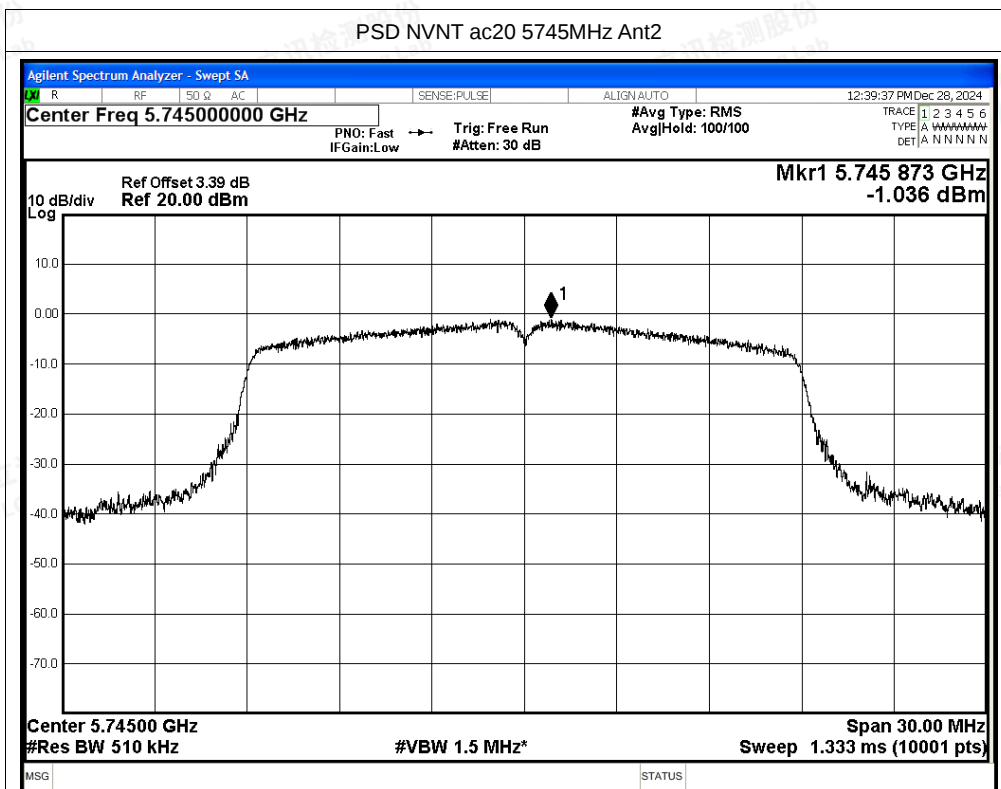

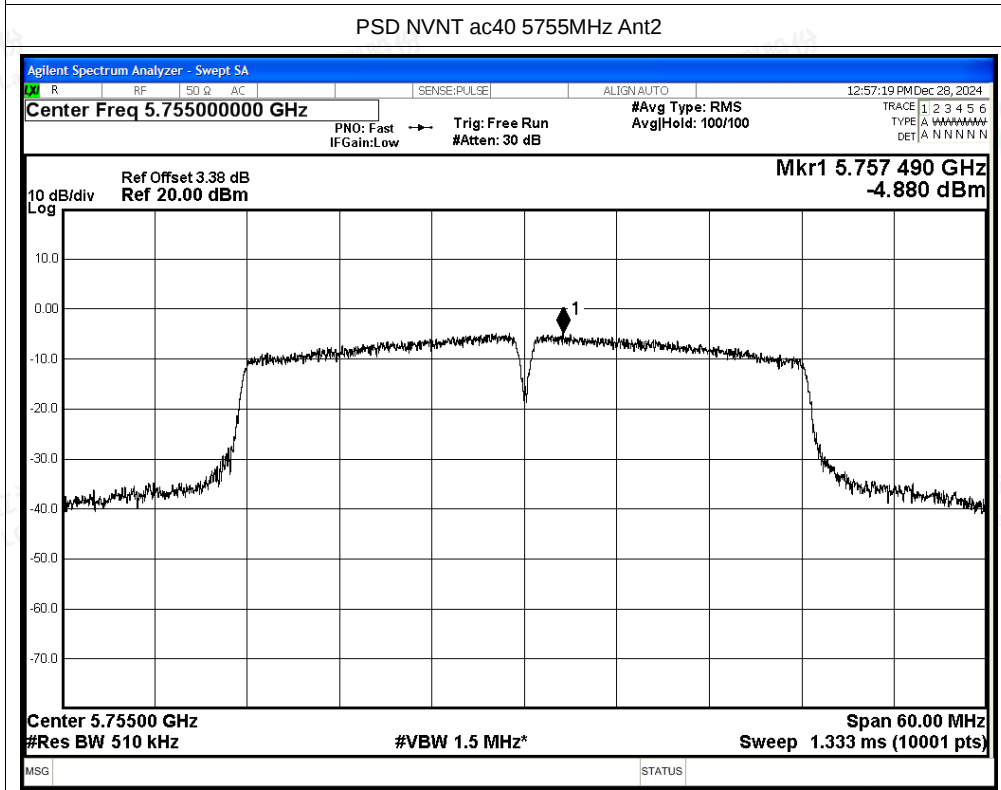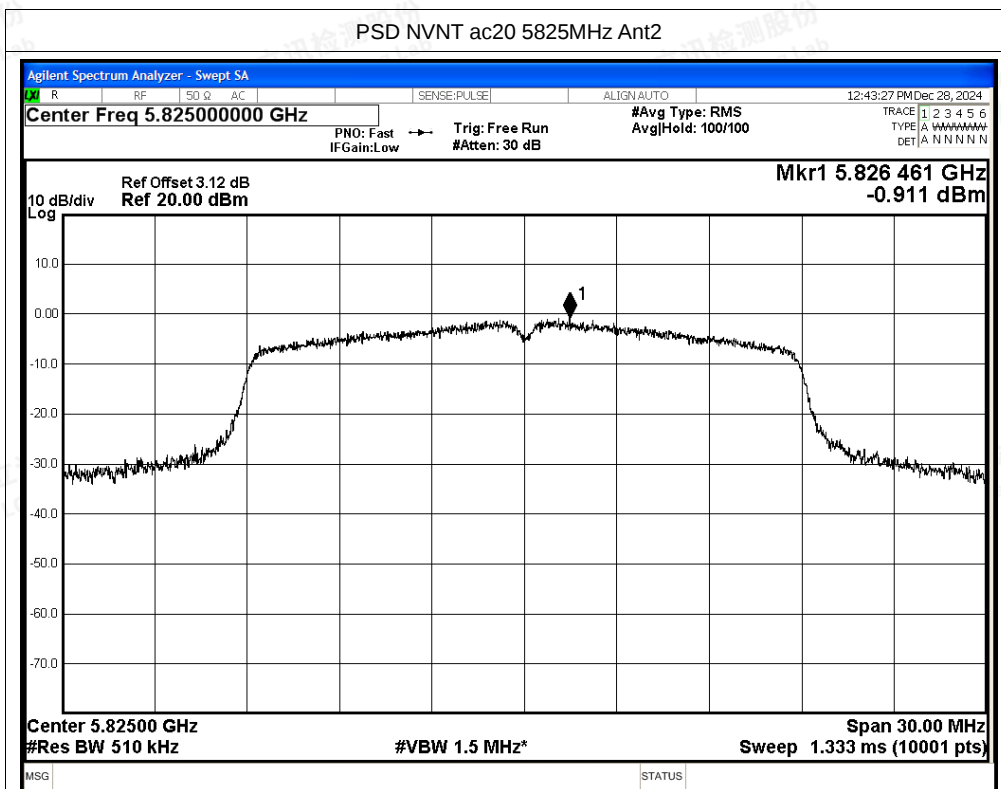




PSD NVNT ac40 5795MHz Ant2

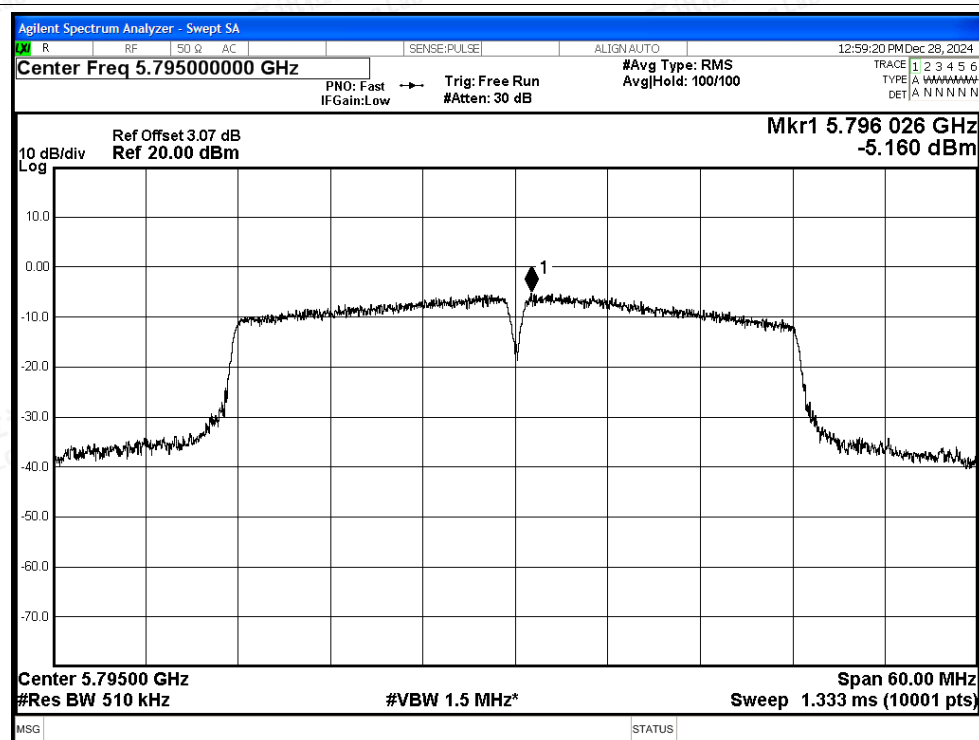


PSD NVNT ax20 5745MHz Ant2

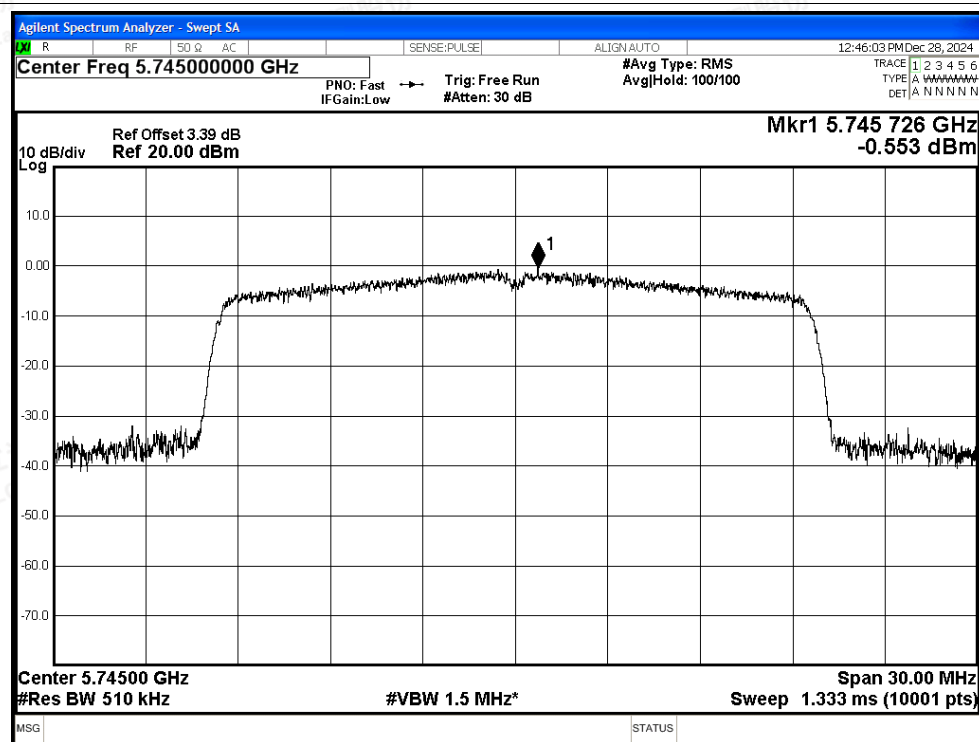






## PSD NVNT ax20 5785MHz Ant2

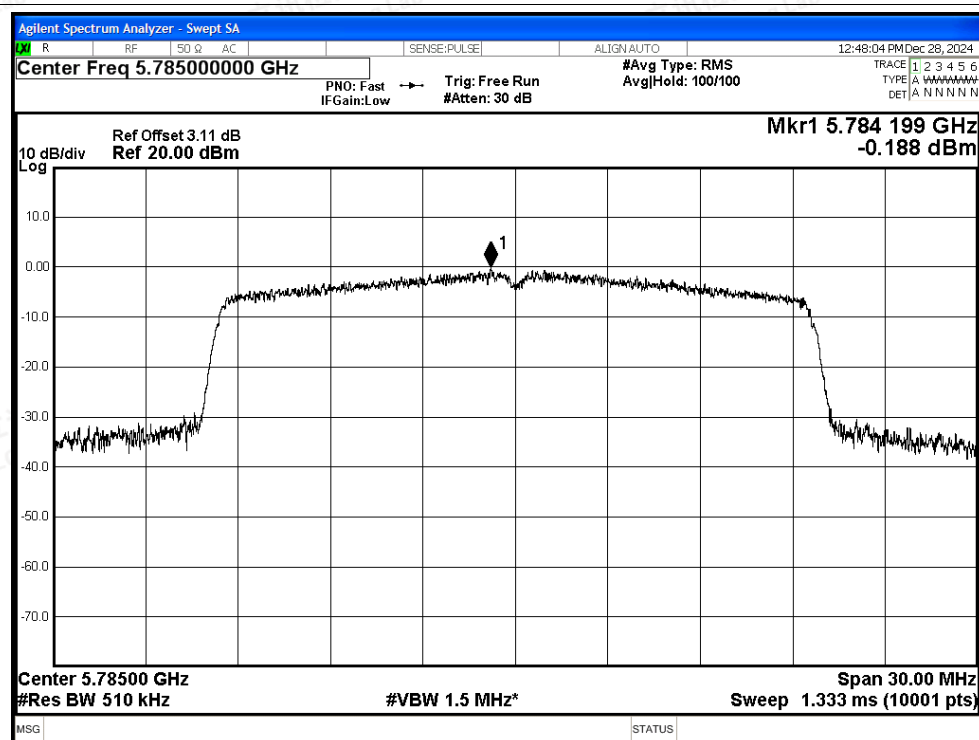

## PSD NVNT ax20 5825MHz Ant2

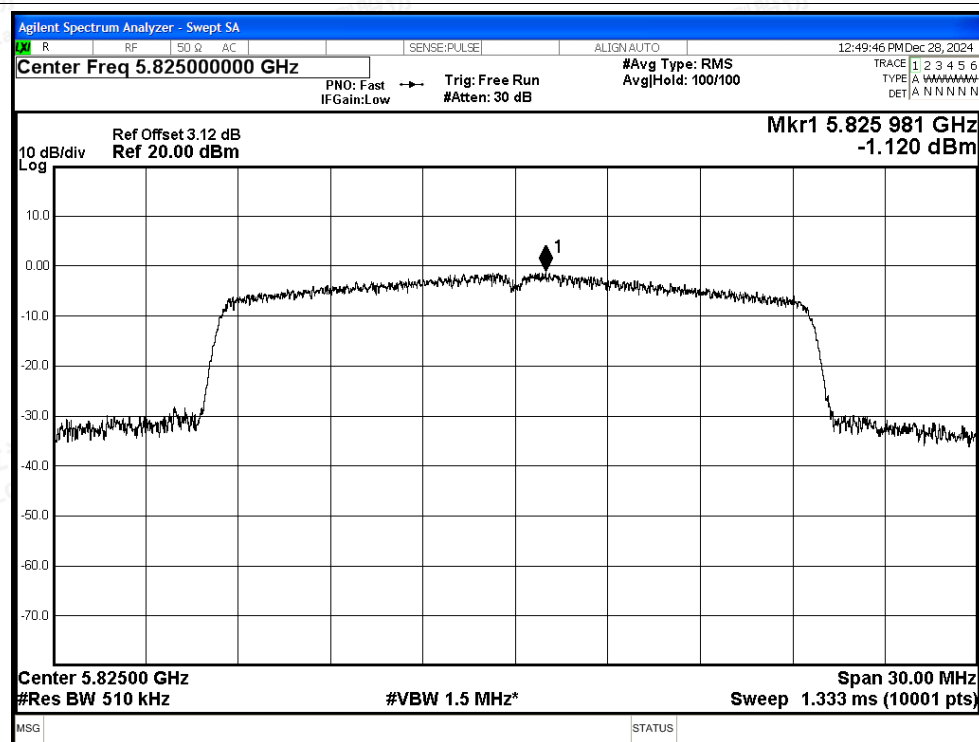

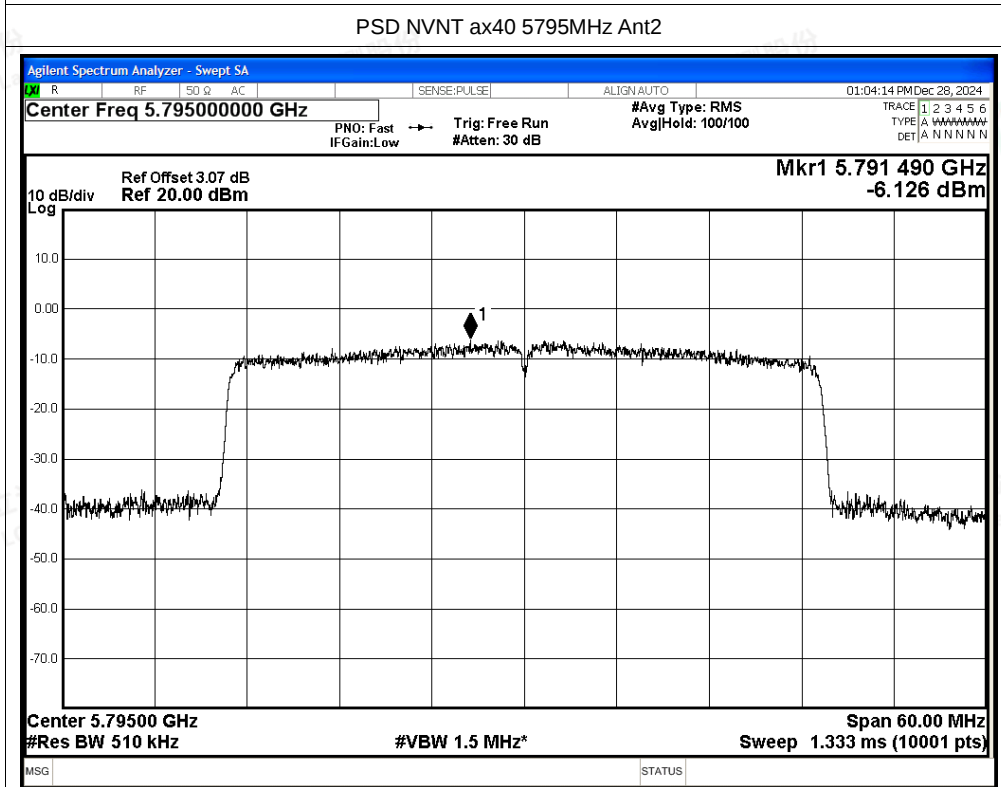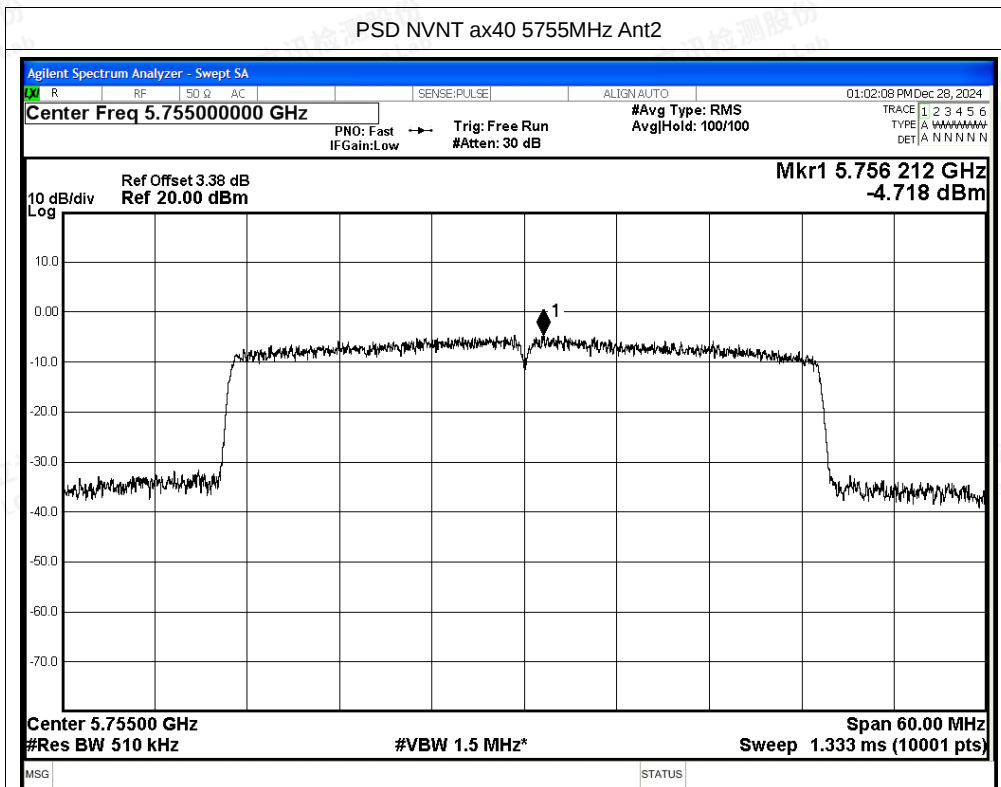



## G.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant2    | 5650            | -47.03      | 2.77       | -                | -44.26           | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5650            | -56.32      | 2.77       | 1.48             | -52.07           | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5700            | -39.59      | 2.77       | -                | -36.82           | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5700            | -52.91      | 2.77       | 1.48             | -48.66           | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5720            | -36.26      | 2.77       | -                | -33.49           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5720            | -45.57      | 2.77       | 1.48             | -41.32           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5725            | -22.8       | 2.77       | -                | -20.03           | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant2    | 5725            | -41.17      | 2.77       | 1.48             | -36.92           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5850            | -35.09      | 2.77       | -                | -32.32           | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5850            | -45.28      | 2.77       | 1.48             | -41.03           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5855            | -38.87      | 2.77       | -                | -36.10           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5855            | -49.65      | 2.77       | 1.48             | -45.40           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5875            | -47.93      | 2.77       | -                | -45.16           | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5875            | -55.69      | 2.77       | 1.48             | -51.44           | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5925            | -50.23      | 2.77       | -                | -47.46           | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5925            | -56.97      | 2.77       | 1.48             | -52.72           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5650            | -46.95      | 2.77       | -                | -44.18           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5650            | -56.02      | 2.77       | 1.63             | -51.62           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5700            | -44.25      | 2.77       | -                | -41.48           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5700            | -53.64      | 2.77       | 1.63             | -49.24           | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5720            | -36.28      | 2.77       | -                | -33.51           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5720            | -45.98      | 2.77       | 1.63             | -41.58           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5725            | -25.01      | 2.77       | -                | -22.24           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5725            | -39.52      | 2.77       | 1.63             | -35.12           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5850            | -28.62      | 2.77       | -                | -25.85           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5850            | -44.56      | 2.77       | 1.58             | -40.21           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5855            | -37.41      | 2.77       | -                | -34.64           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5855            | -49.52      | 2.77       | 1.58             | -45.17           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5875            | -43.26      | 2.77       | -                | -40.49           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5875            | -55.85      | 2.77       | 1.58             | -51.50           | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5925            | -49.86      | 2.77       | -                | -47.09           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5925            | -57.2       | 2.77       | 1.58             | -52.85           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5650            | -46.62      | 2.77       | -                | -43.85           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5650            | -56.21      | 2.77       | 2.6              | -50.84           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5700            | -37.08      | 2.77       | -                | -34.31           | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5700            | -48.86      | 2.77       | 2.6              | -43.49           | Average  | 10          | Pass    |





|      |      |      |      |      |        |      |      |        |         |      |      |
|------|------|------|------|------|--------|------|------|--------|---------|------|------|
| NVNT | n40  | 5755 | Ant2 | 5720 | -26.16 | 2.77 | -    | -23.39 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant2 | 5720 | -39.17 | 2.77 | 2.6  | -33.80 | Average | 15.6 | Pass |
| NVNT | n40  | 5755 | Ant2 | 5725 | -19.91 | 2.77 | -    | -17.14 | Peak    | 27   | Pass |
| NVNT | n40  | 5755 | Ant2 | 5725 | -35.95 | 2.77 | 2.6  | -30.58 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5850 | -43.45 | 2.77 | -    | -40.68 | Peak    | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5850 | -53.43 | 2.77 | 2.78 | -47.88 | Average | 27   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5855 | -43.55 | 2.77 | -    | -40.78 | Peak    | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant2 | 5855 | -55.24 | 2.77 | 2.78 | -49.69 | Average | 15.6 | Pass |
| NVNT | n40  | 5795 | Ant2 | 5875 | -48.24 | 2.77 | -    | -45.47 | Peak    | 10   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5875 | -56.66 | 2.77 | 2.78 | -51.11 | Average | 10   | Pass |
| NVNT | n40  | 5795 | Ant2 | 5925 | -48.5  | 2.77 | -    | -45.73 | Peak    | -27  | Pass |
| NVNT | n40  | 5795 | Ant2 | 5925 | -56.97 | 2.77 | 2.78 | -51.42 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5650 | -47.4  | 2.77 | -    | -44.63 | Peak    | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5650 | -56.31 | 2.77 | 1.46 | -52.08 | Average | -27  | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5700 | -44.95 | 2.77 | -    | -42.18 | Peak    | 10   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5700 | -54.32 | 2.77 | 1.46 | -50.09 | Average | 10   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5720 | -38.52 | 2.77 | -    | -35.75 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5720 | -46.43 | 2.77 | 1.46 | -42.20 | Average | 15.6 | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5725 | -28.03 | 2.77 | -    | -25.26 | Peak    | 27   | Pass |
| NVNT | ac20 | 5745 | Ant2 | 5725 | -42.82 | 2.77 | 1.46 | -38.59 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5850 | -38    | 2.77 | -    | -35.23 | Peak    | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5850 | -46.22 | 2.77 | 1.57 | -41.88 | Average | 27   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5855 | -35.23 | 2.77 | -    | -32.46 | Peak    | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5855 | -49.65 | 2.77 | 1.57 | -45.31 | Average | 15.6 | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5875 | -46.8  | 2.77 | -    | -44.03 | Peak    | 10   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5875 | -56.63 | 2.77 | 1.57 | -52.29 | Average | 10   | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5925 | -49.54 | 2.77 | -    | -46.77 | Peak    | -27  | Pass |
| NVNT | ac20 | 5825 | Ant2 | 5925 | -57.07 | 2.77 | 1.57 | -52.73 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5650 | -48.31 | 2.77 | -    | -45.54 | Peak    | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5650 | -56.23 | 2.77 | 2.59 | -50.87 | Average | -27  | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5700 | -39.15 | 2.77 | -    | -36.38 | Peak    | 10   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5700 | -48.98 | 2.77 | 2.59 | -43.62 | Average | 10   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5720 | -22.47 | 2.77 | -    | -19.70 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5720 | -38.39 | 2.77 | 2.59 | -33.03 | Average | 15.6 | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5725 | -24.1  | 2.77 | -    | -21.33 | Peak    | 27   | Pass |
| NVNT | ac40 | 5755 | Ant2 | 5725 | -36.84 | 2.77 | 2.59 | -31.48 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5850 | -44.43 | 2.77 | -    | -41.66 | Peak    | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5850 | -54.44 | 2.77 | 2.61 | -49.06 | Average | 27   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5855 | -43.15 | 2.77 | -    | -40.38 | Peak    | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5855 | -55.68 | 2.77 | 2.61 | -50.30 | Average | 15.6 | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5875 | -47.39 | 2.77 | -    | -44.62 | Peak    | 10   | Pass |






|      |      |      |      |      |        |      |      |        |         |      |      |
|------|------|------|------|------|--------|------|------|--------|---------|------|------|
| NVNT | ac40 | 5795 | Ant2 | 5875 | -56.8  | 2.77 | 2.61 | -51.42 | Average | 10   | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5925 | -46.8  | 2.77 | -    | -44.03 | Peak    | -27  | Pass |
| NVNT | ac40 | 5795 | Ant2 | 5925 | -57.72 | 2.77 | 2.61 | -52.34 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5650 | -48.05 | 2.77 | -    | -45.28 | Peak    | -27  | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5650 | -56.39 | 2.77 | 1.96 | -51.66 | Average | -27  | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5700 | -38.73 | 2.77 | -    | -35.96 | Peak    | 10   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5700 | -53.01 | 2.77 | 1.96 | -49.05 | Average | 10   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5720 | -29.17 | 2.77 | -    | -27.17 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5720 | -42.91 | 2.77 | 1.96 | -38.95 | Average | 15.6 | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5725 | -23.83 | 2.77 | -    | -21.83 | Peak    | 27   | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5725 | -36.08 | 2.77 | 1.96 | -32.12 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5850 | -31.68 | 2.77 | -    | -29.68 | Peak    | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5850 | -41.91 | 2.77 | 1.92 | -37.99 | Average | 27   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5855 | -34.79 | 2.77 | -    | -32.79 | Peak    | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5855 | -47.24 | 2.77 | 1.92 | -43.32 | Average | 15.6 | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5875 | -45.97 | 2.77 | -    | -43.97 | Peak    | 10   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5875 | -55.6  | 2.77 | 1.92 | -51.68 | Average | 10   | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5925 | -47.5  | 2.77 | -    | -45.5  | Peak    | -27  | Pass |
| NVNT | ax20 | 5825 | Ant2 | 5925 | -57.46 | 2.77 | 1.92 | -53.54 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5650 | -42.72 | 2.77 | -    | -40.72 | Peak    | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5650 | -54.9  | 2.77 | 3.24 | -49.66 | Average | -27  | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5700 | -32.08 | 2.77 | -    | -30.08 | Peak    | 10   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5700 | -43.62 | 2.77 | 3.24 | -38.38 | Average | 10   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5720 | -21.62 | 2.77 | -    | -19.62 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5720 | -34.89 | 2.77 | 3.24 | -29.65 | Average | 15.6 | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5725 | -22.48 | 2.77 | -    | -20.48 | Peak    | 27   | Pass |
| NVNT | ax40 | 5755 | Ant2 | 5725 | -34.29 | 2.77 | 3.24 | -29.05 | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5850 | -38.33 | 2.77 | -    | -36.33 | Peak    | 27   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5850 | -52.37 | 2.77 | 3.07 | -47.3  | Average | 27   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5855 | -43.57 | 2.77 | -    | -41.57 | Peak    | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5855 | -53.88 | 2.77 | 3.07 | -48.81 | Average | 15.6 | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5875 | -48.48 | 2.77 | -    | -46.48 | Peak    | 10   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5875 | -56.97 | 2.77 | 3.07 | -51.9  | Average | 10   | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5925 | -50.06 | 2.77 | -    | -48.06 | Peak    | -27  | Pass |
| NVNT | ax40 | 5795 | Ant2 | 5925 | -57.77 | 2.77 | 3.07 | -52.7  | Average | -27  | Pass |






## Test Graphs

## Restrict Band NVNT a 5745MHz Ant2 Peak

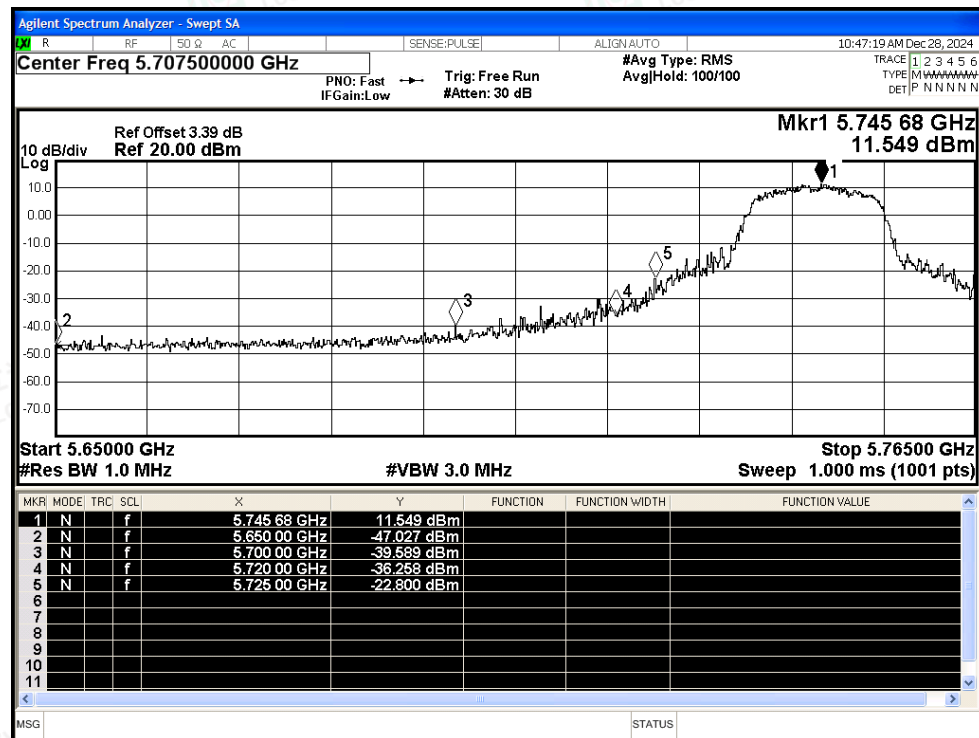

## Restrict Band NVNT a 5745MHz Ant2 Average

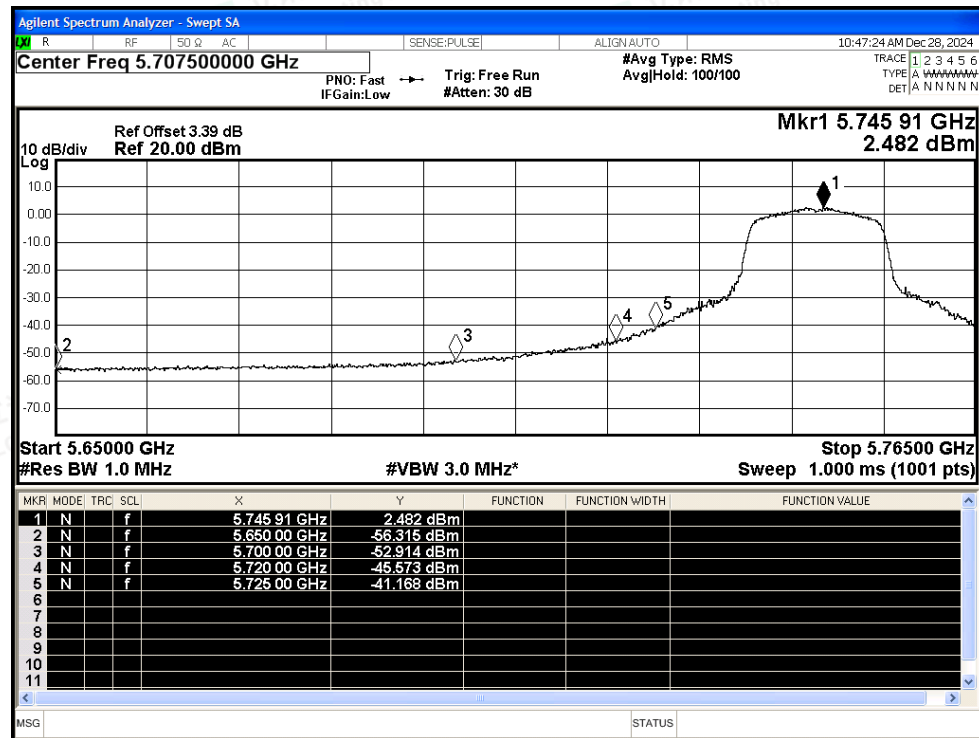

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5825MHz Ant2 Peak

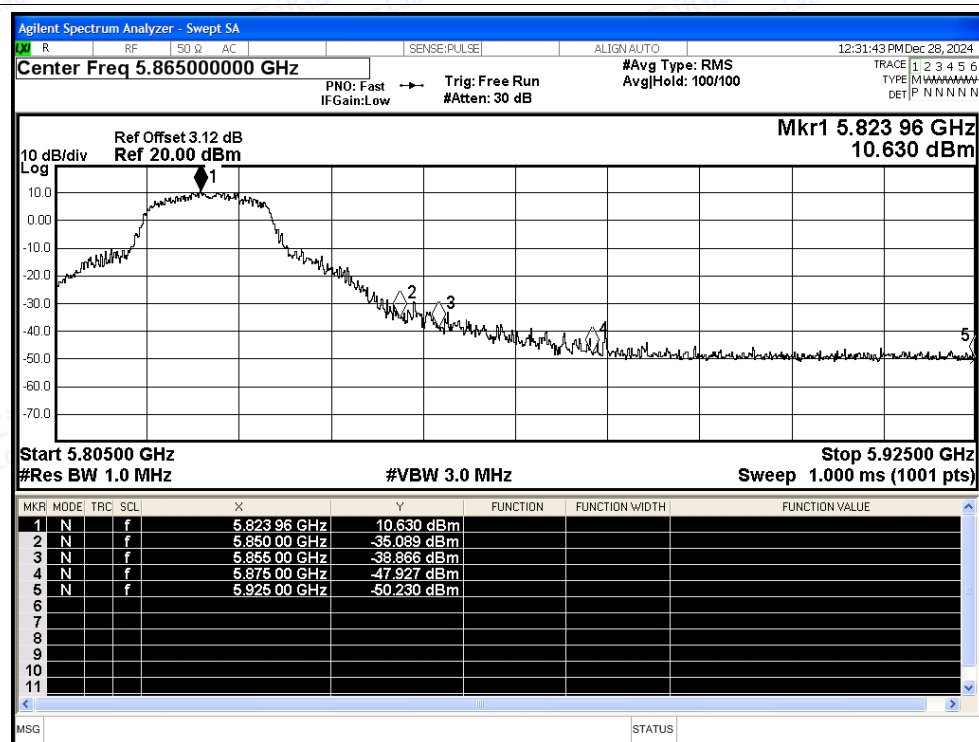

## Restrict Band NVNT a 5825MHz Ant2 Average

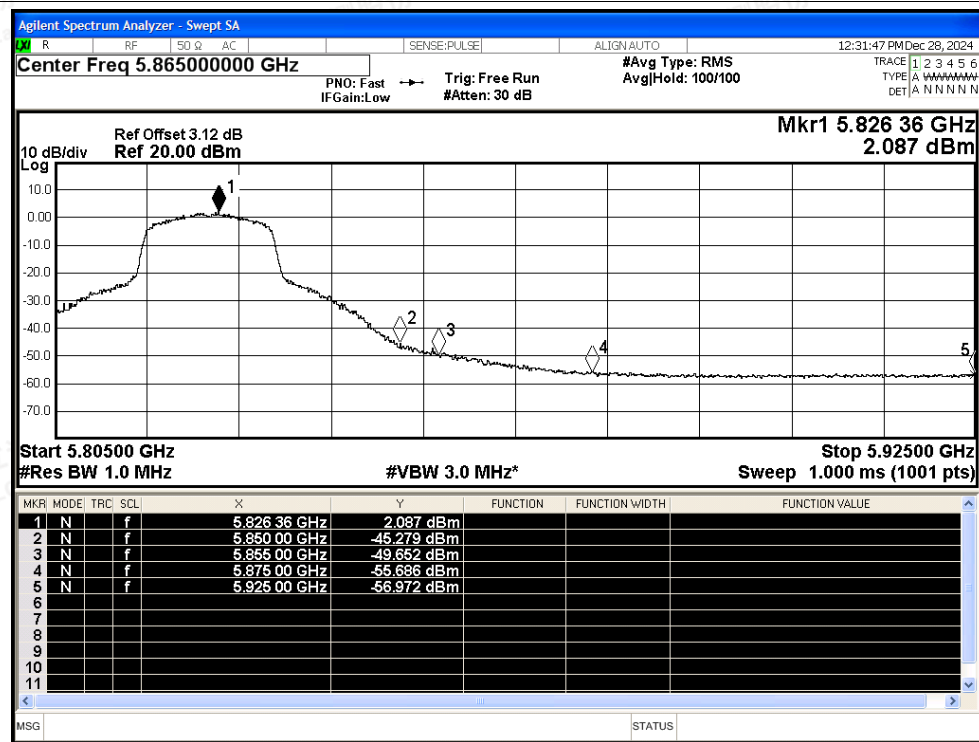

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5745MHz Ant2 Peak

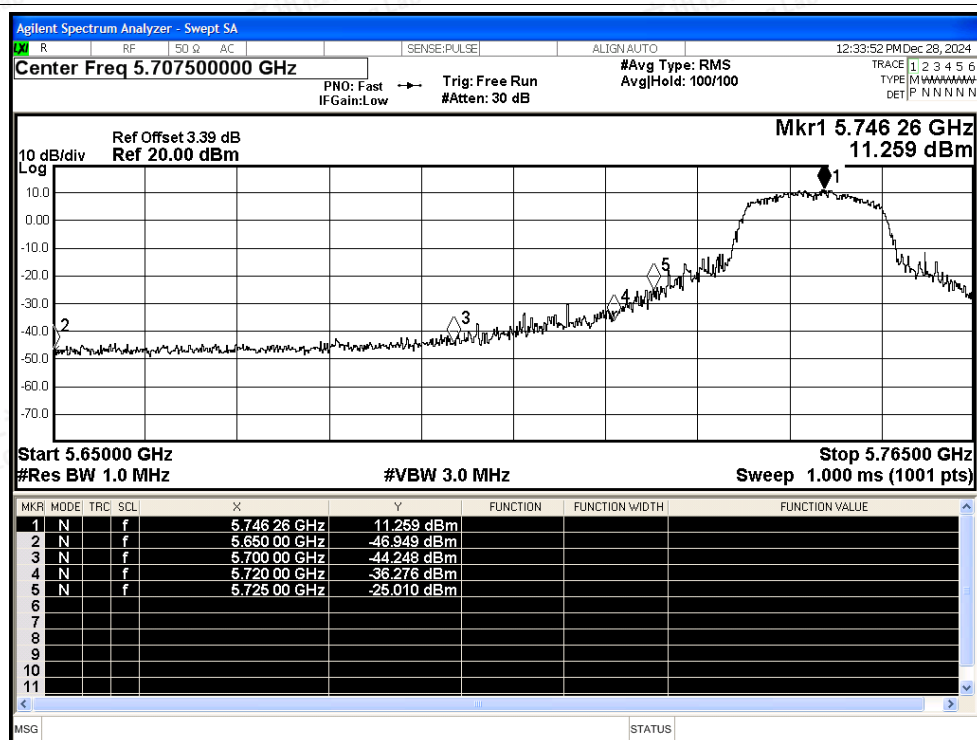

## Restrict Band NVNT n20 5745MHz Ant2 Average

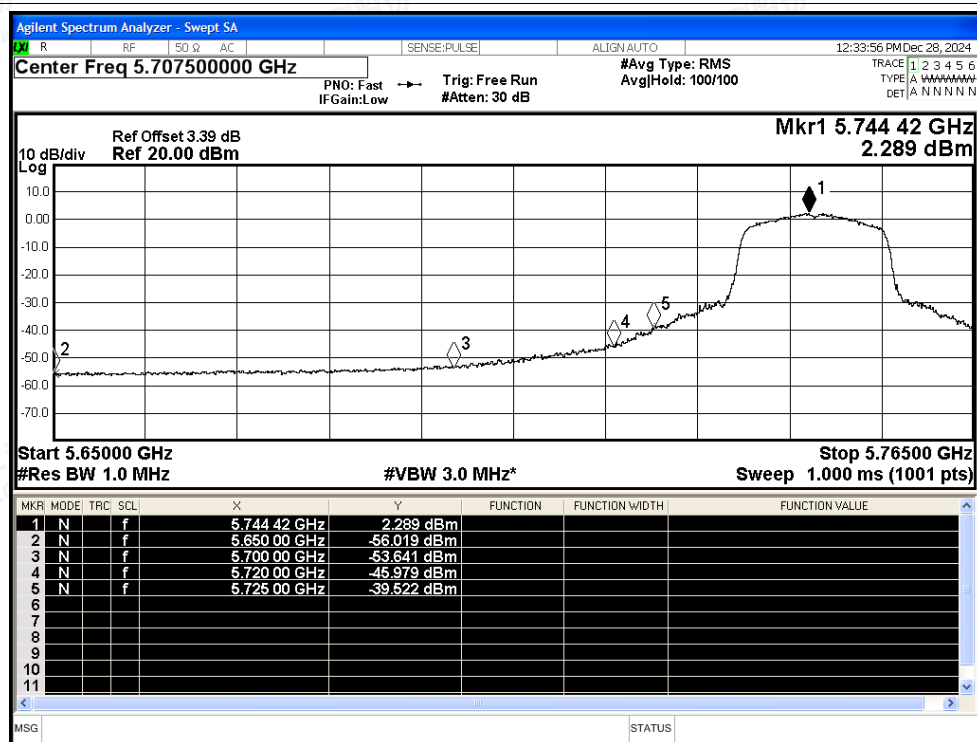

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5825MHz Ant2 Peak

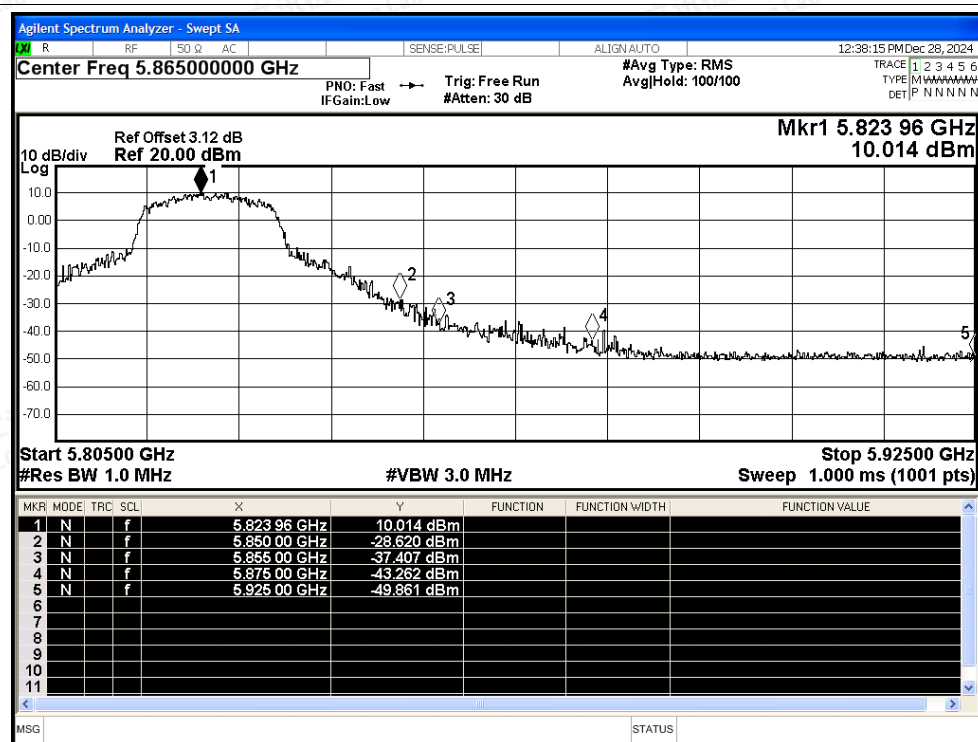

## Restrict Band NVNT n20 5825MHz Ant2 Average

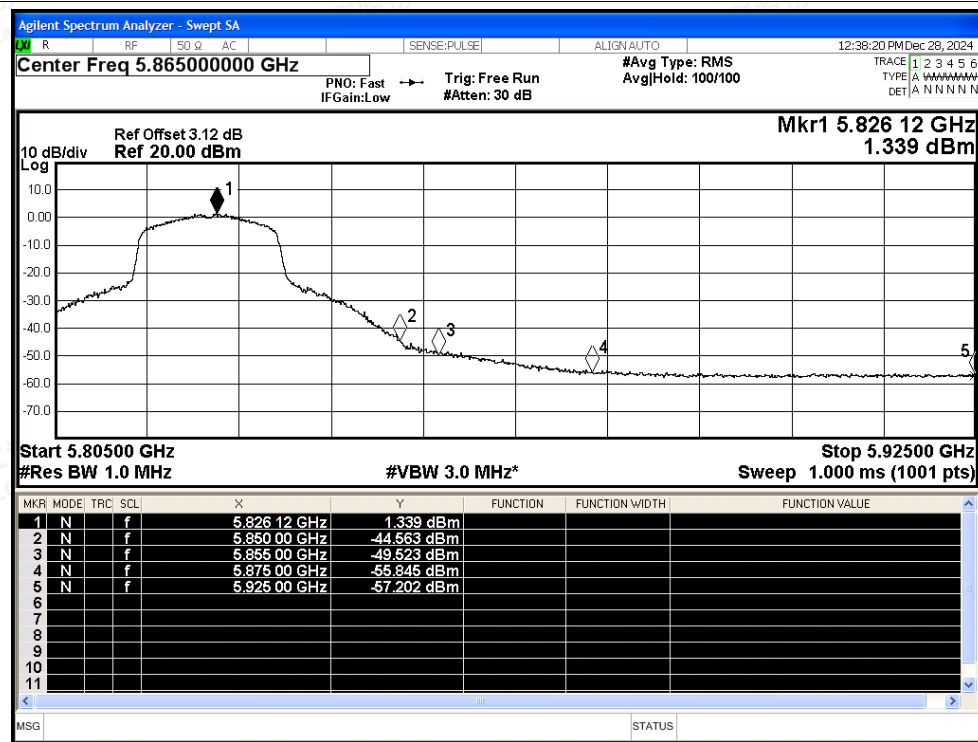

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5755MHz Ant2 Peak

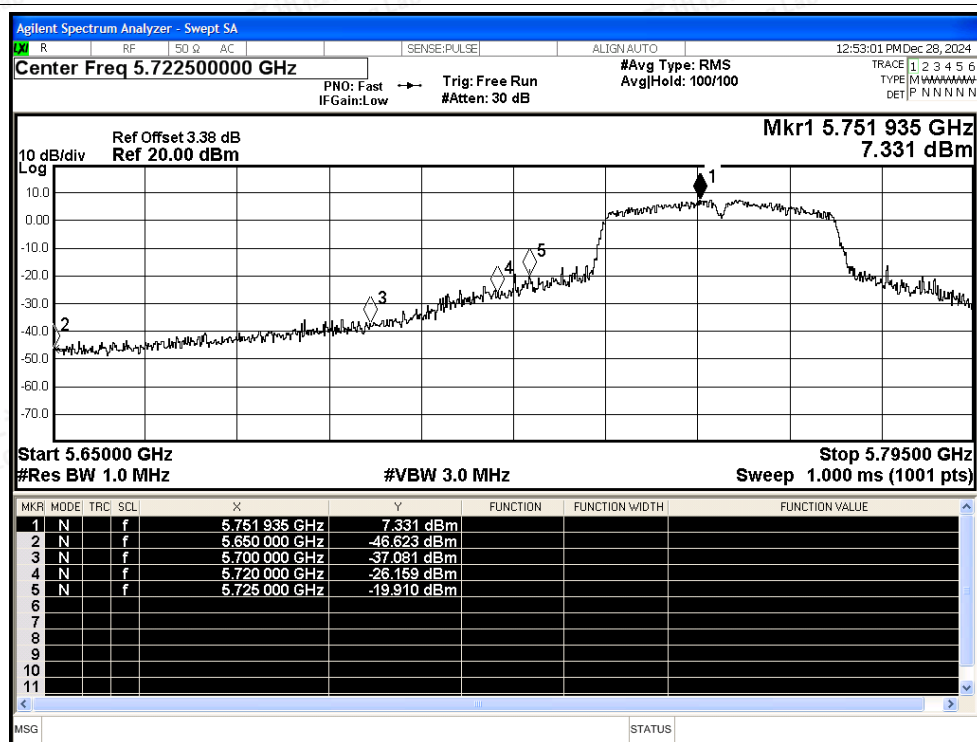

## Restrict Band NVNT n40 5755MHz Ant2 Average

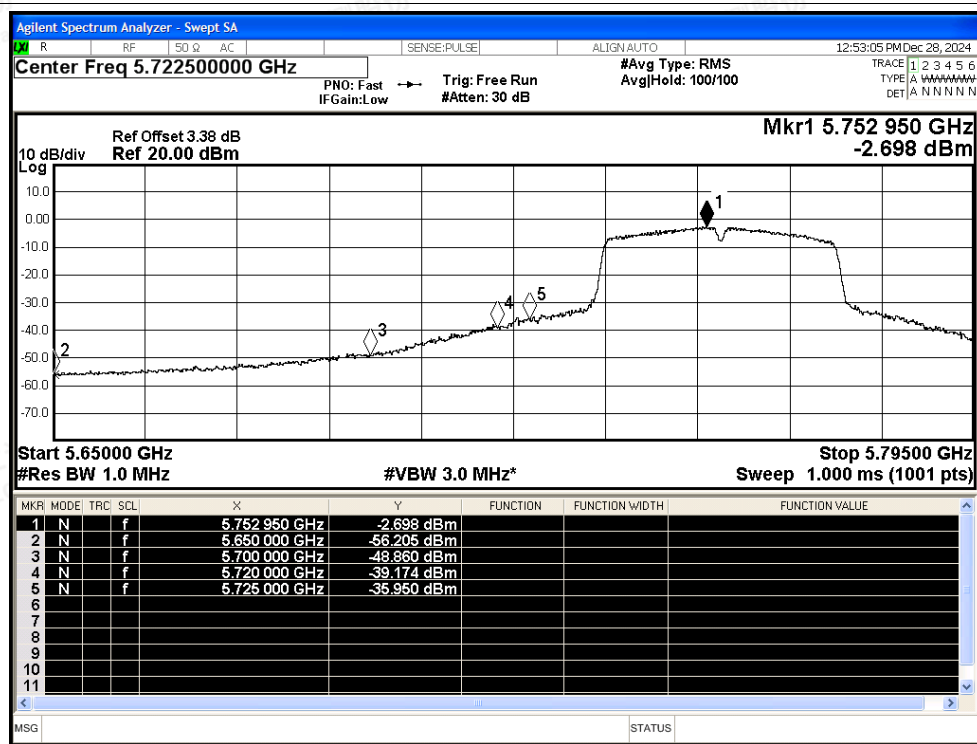

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5795MHz Ant2 Peak

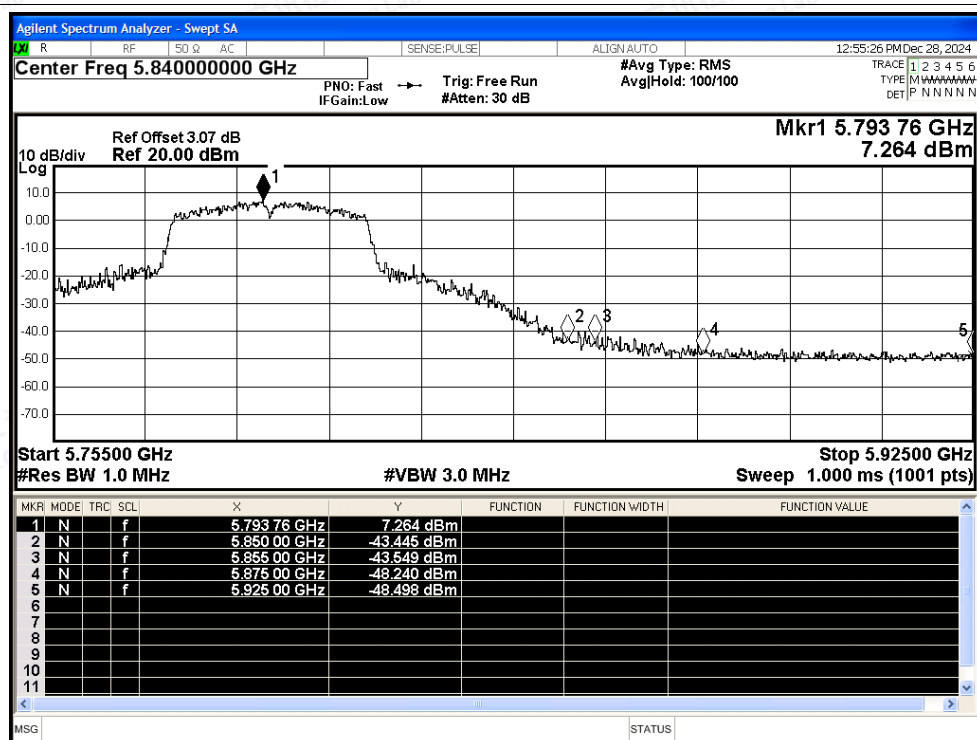

## Restrict Band NVNT n40 5795MHz Ant2 Average

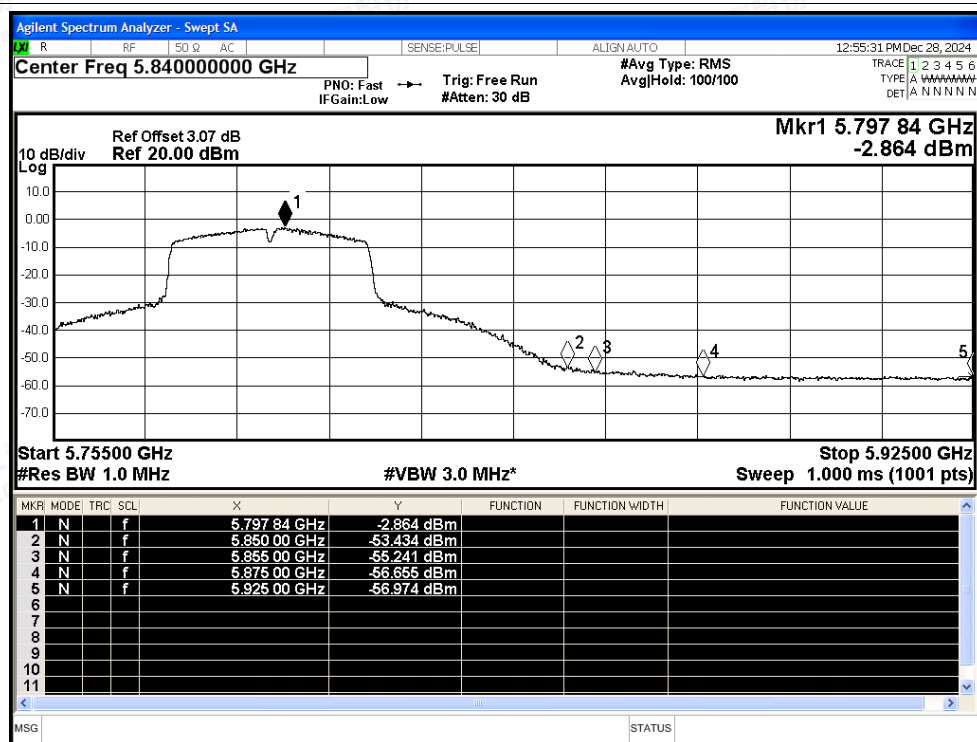

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5745MHz Ant2 Peak

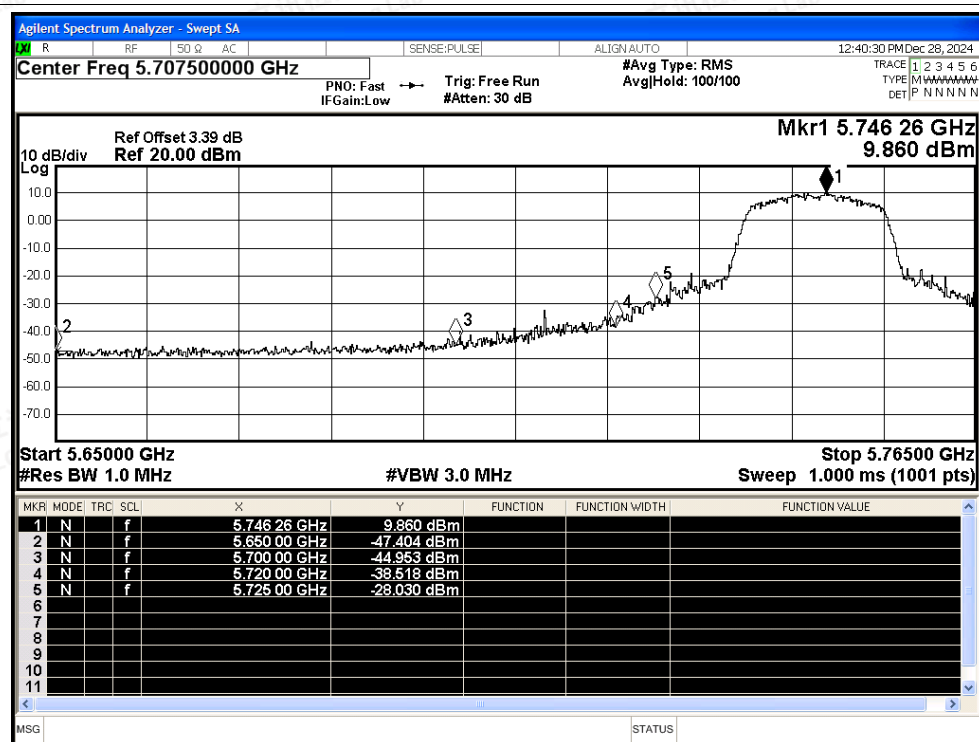

## Restrict Band NVNT ac20 5745MHz Ant2 Average

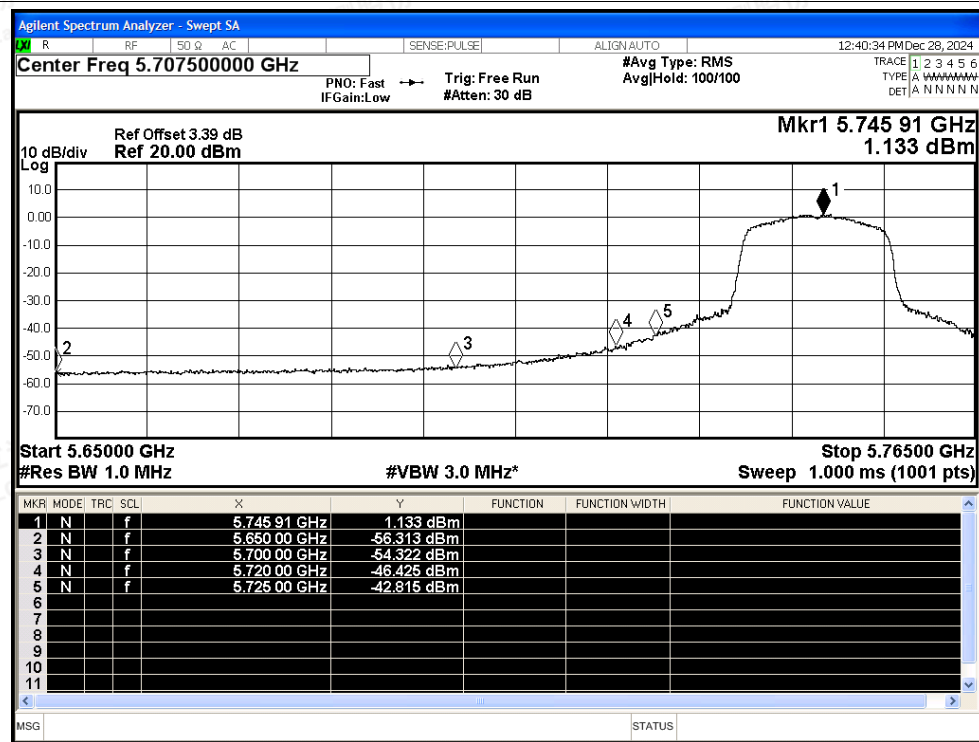

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac20 5825MHz Ant2 Peak

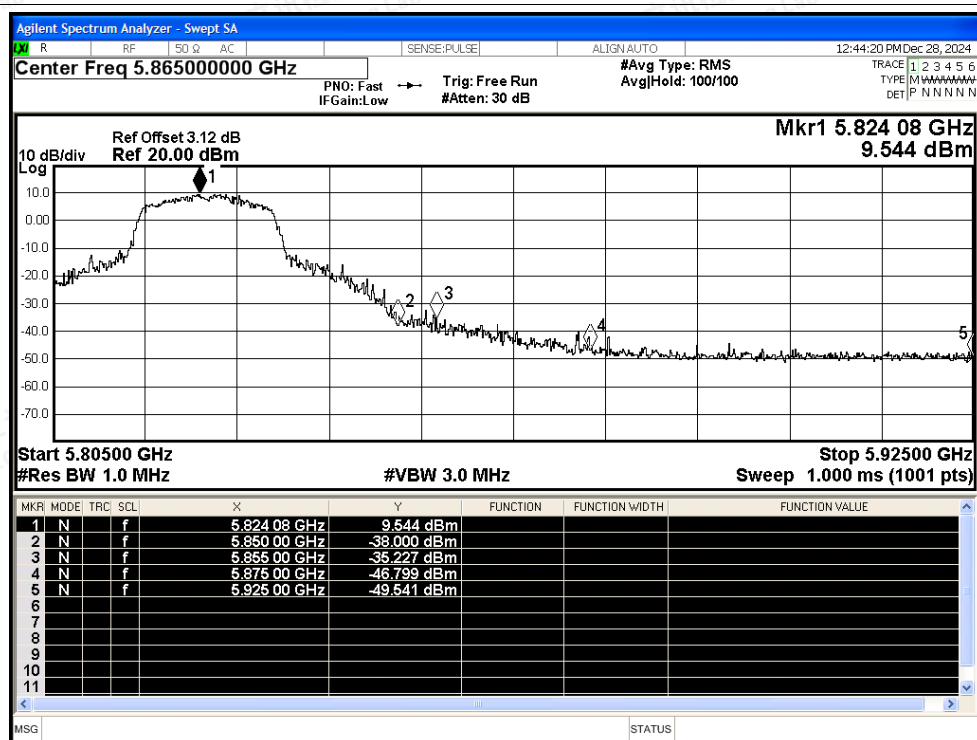

## Restrict Band NVNT ac20 5825MHz Ant2 Average

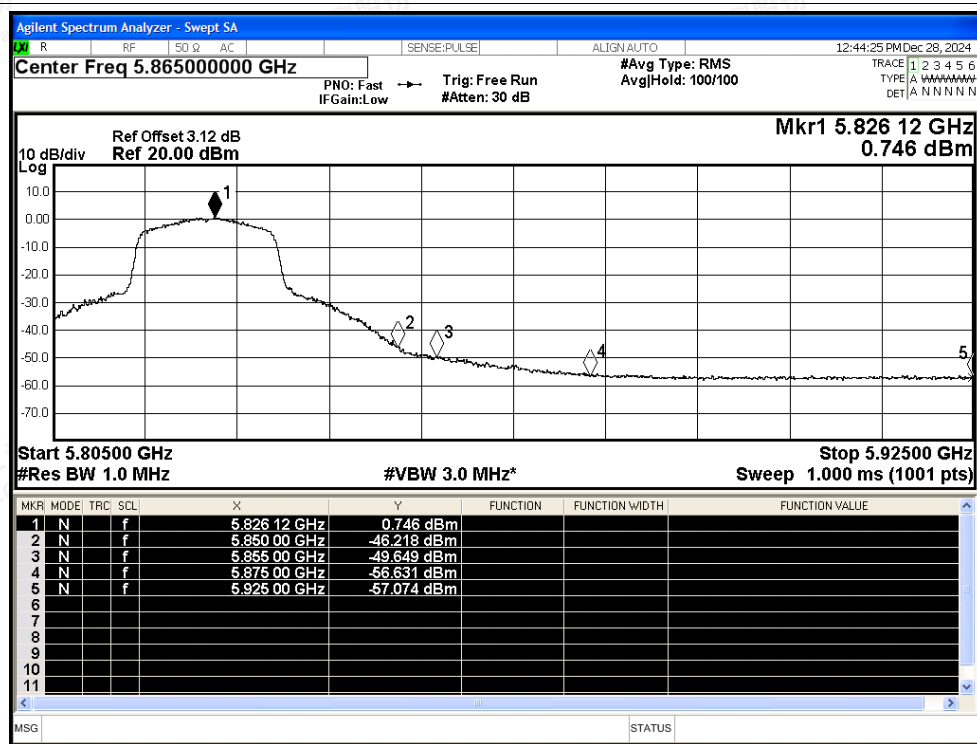

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5755MHz Ant2 Peak

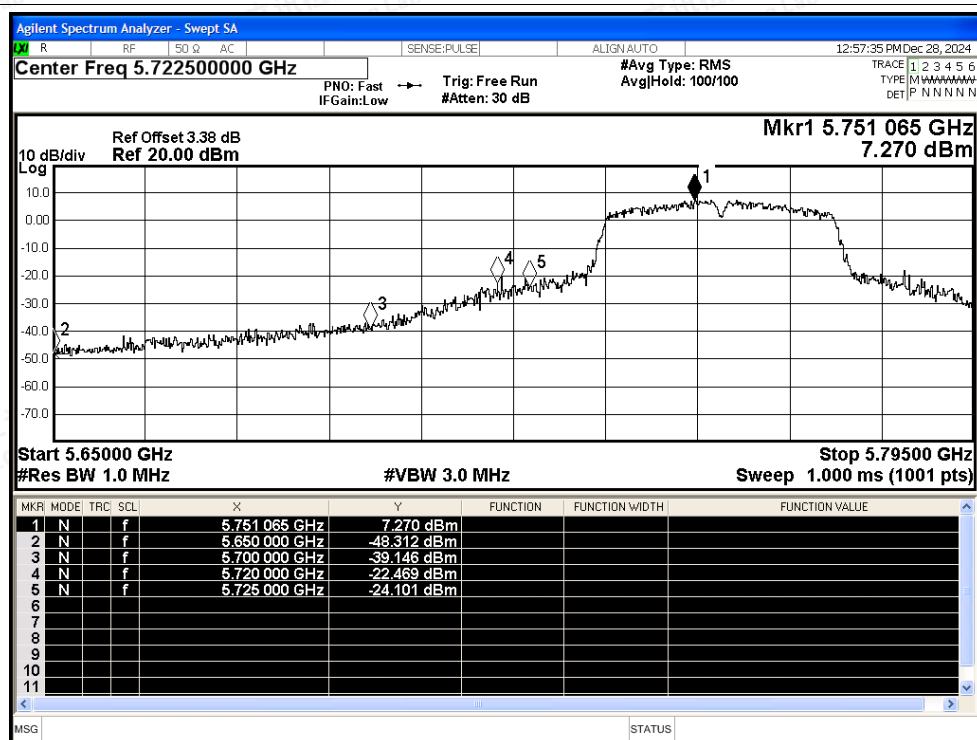

## Restrict Band NVNT ac40 5755MHz Ant2 Average

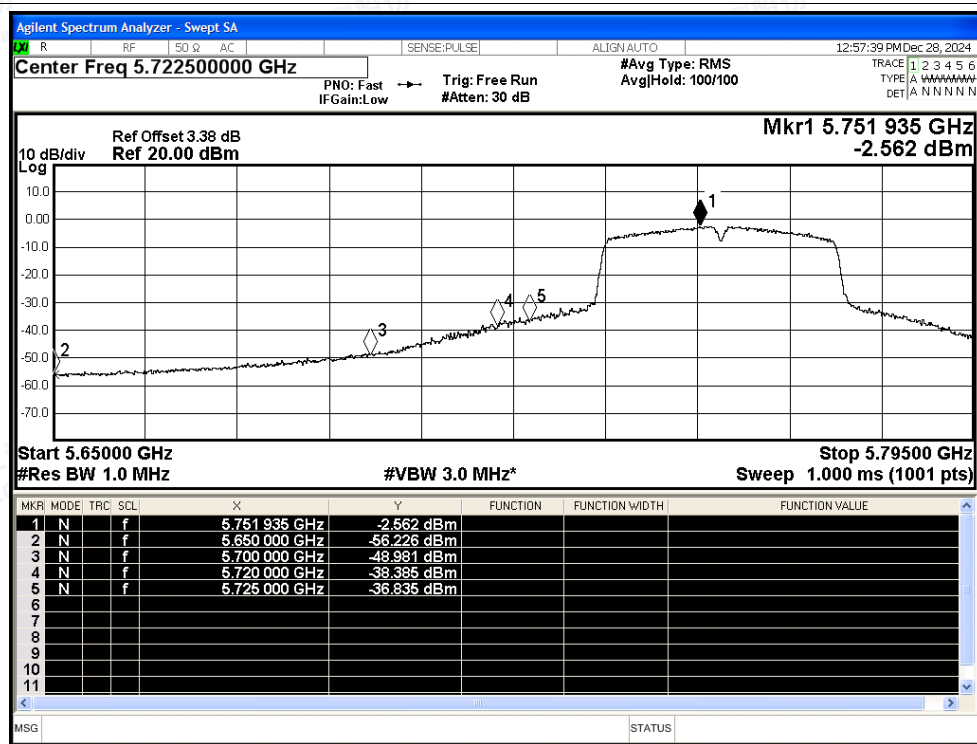

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ac40 5795MHz Ant2 Peak

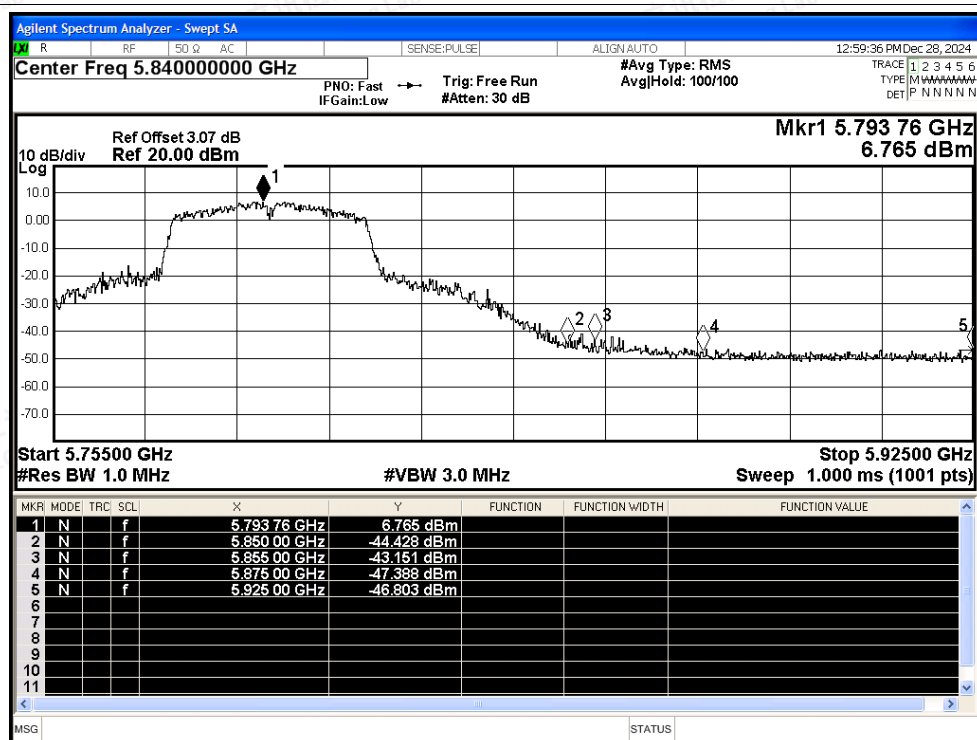

## Restrict Band NVNT ac40 5795MHz Ant2 Average

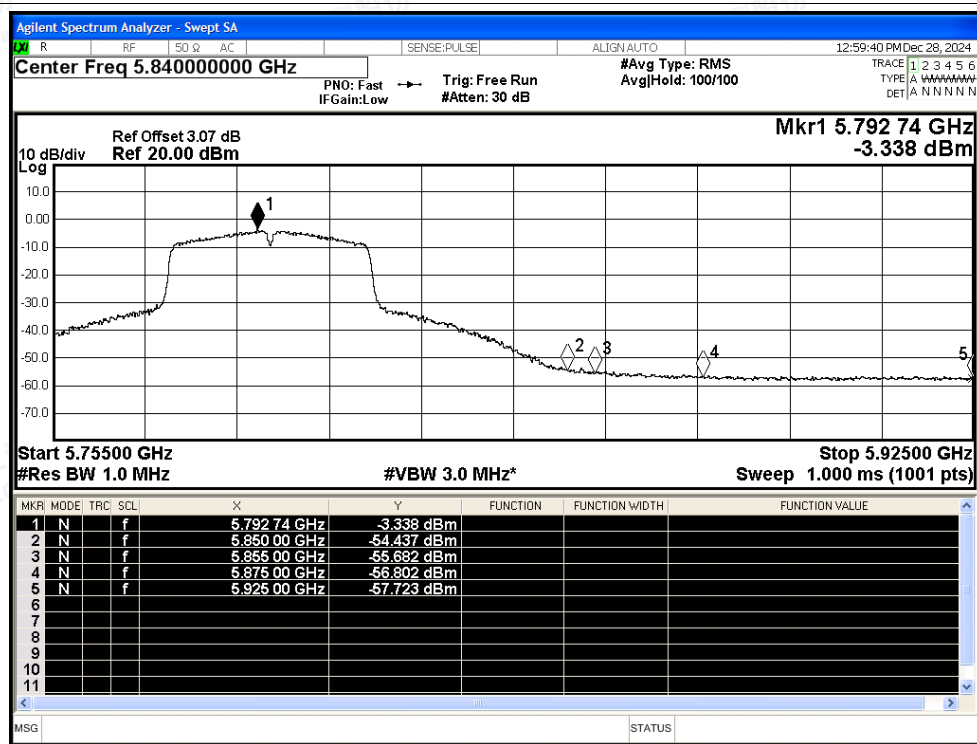

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5745MHz Ant2 Peak

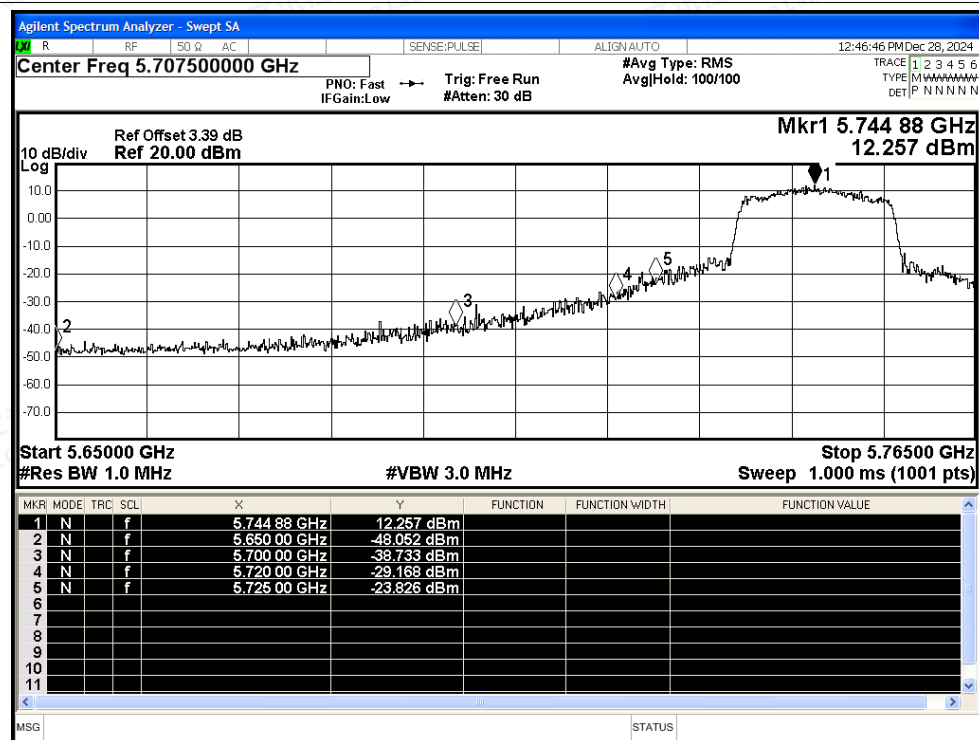

## Restrict Band NVNT ax20 5745MHz Ant2 Average

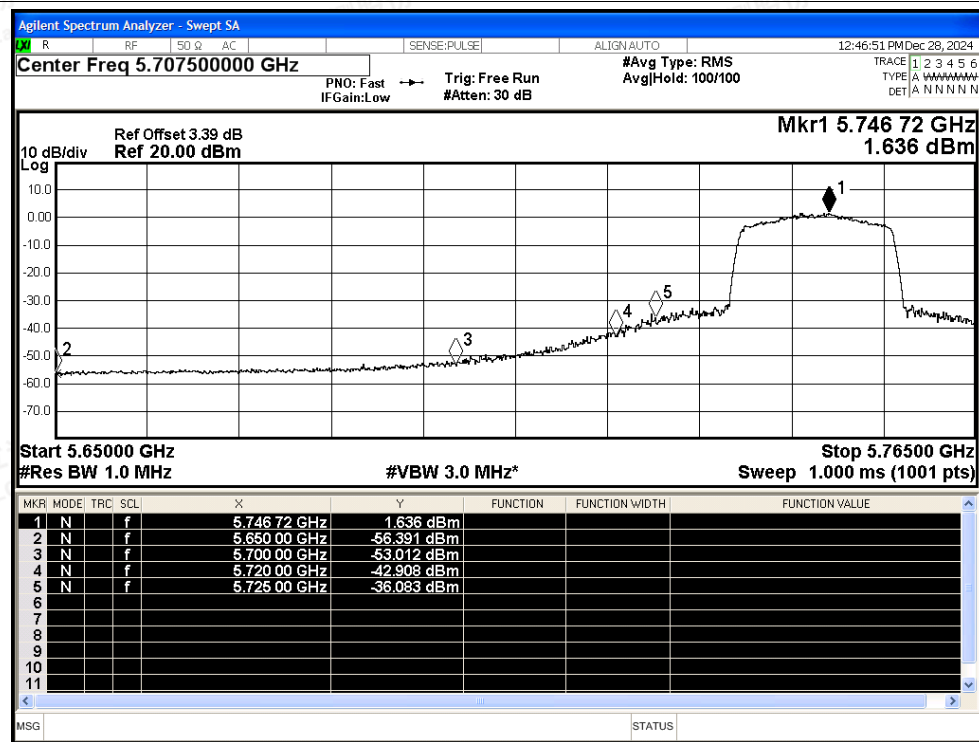

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax20 5825MHz Ant2 Peak

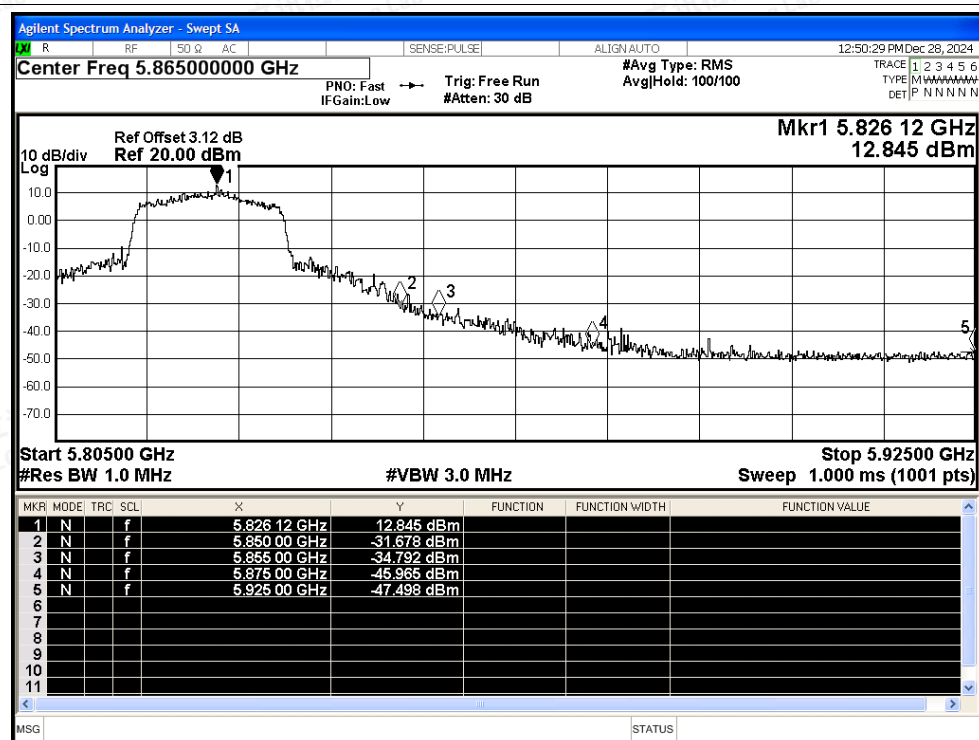

## Restrict Band NVNT ax20 5825MHz Ant2 Average

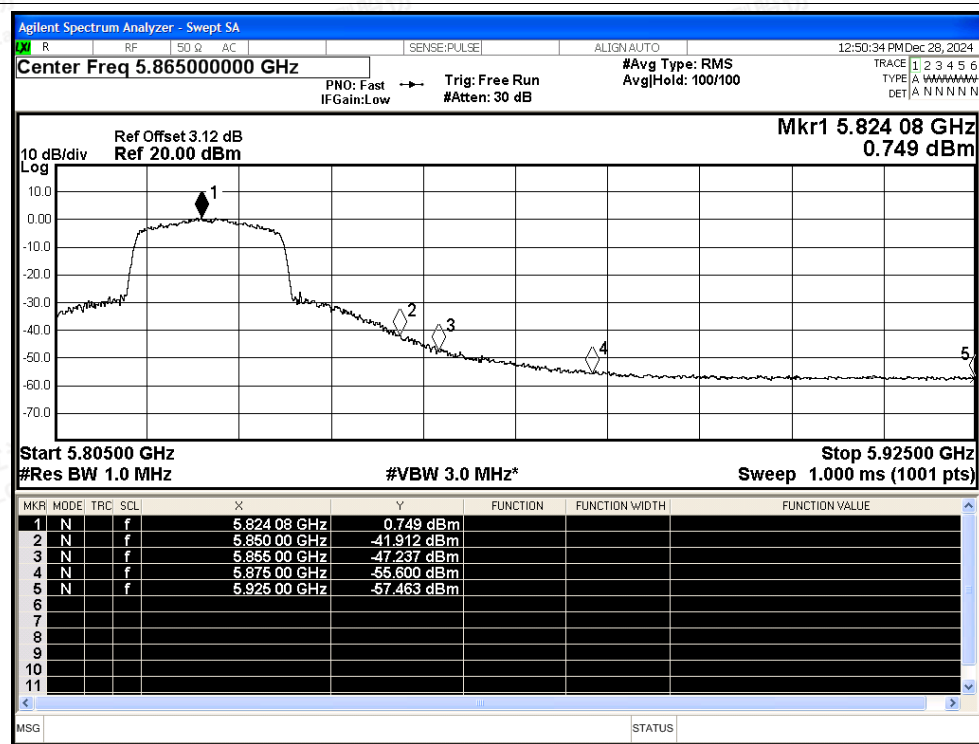

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5755MHz Ant2 Peak

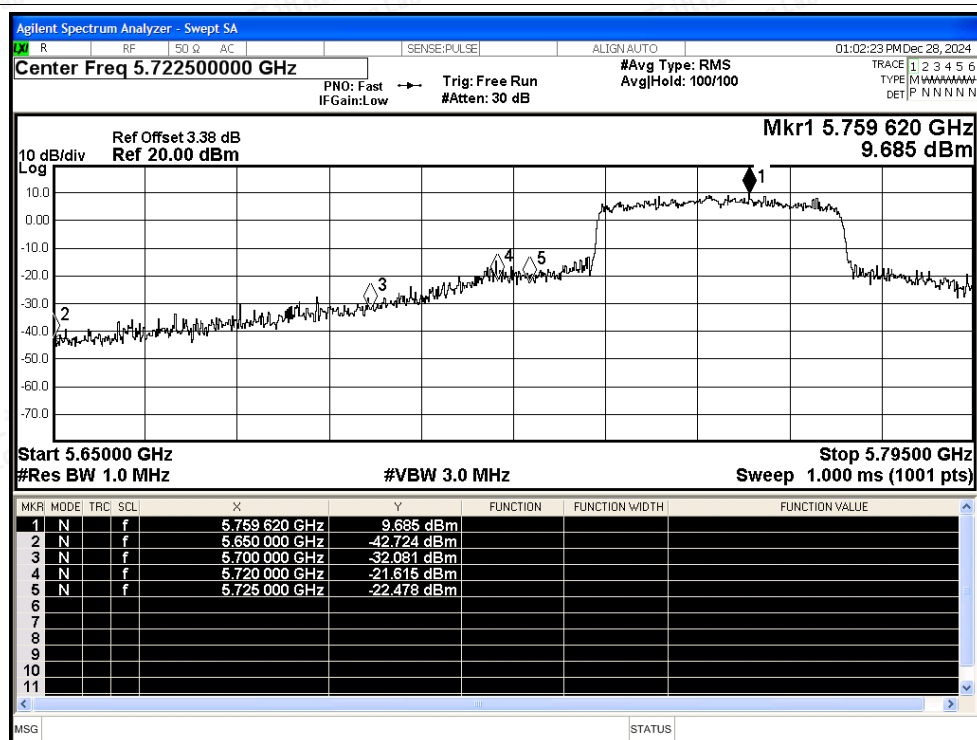

## Restrict Band NVNT ax40 5755MHz Ant2 Average

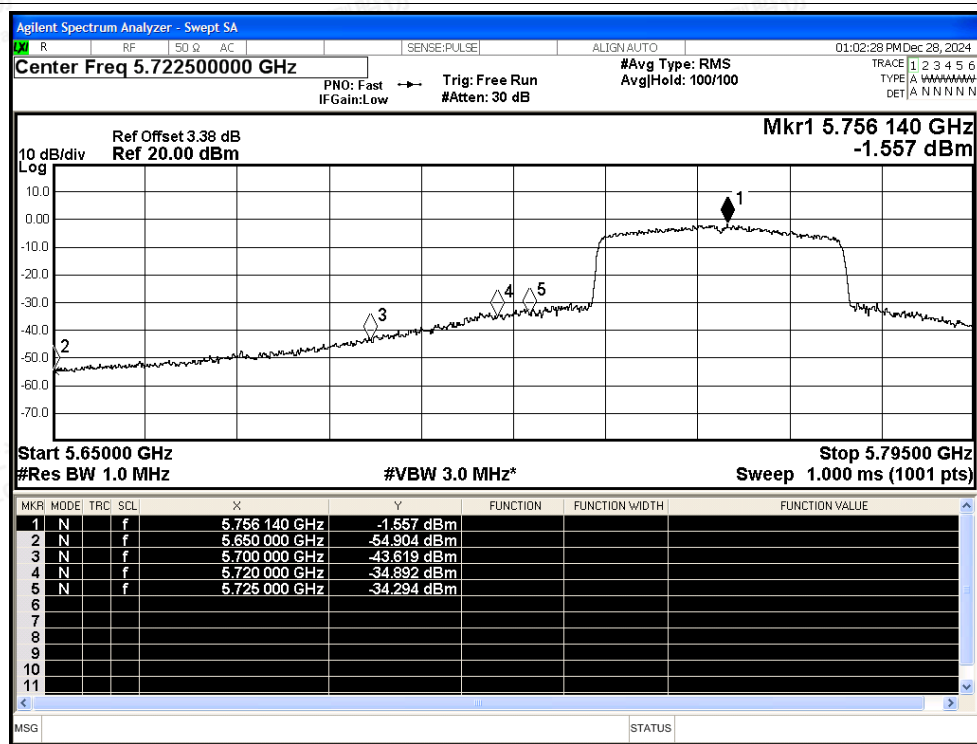

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT ax40 5795MHz Ant2 Peak

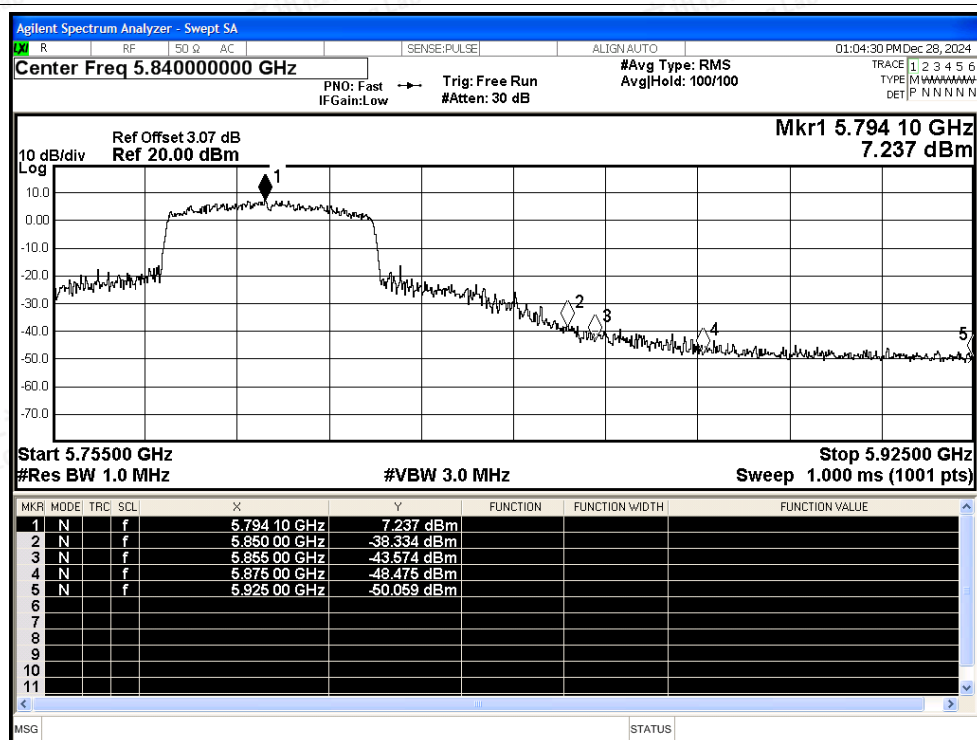

## Restrict Band NVNT ax40 5795MHz Ant2 Average

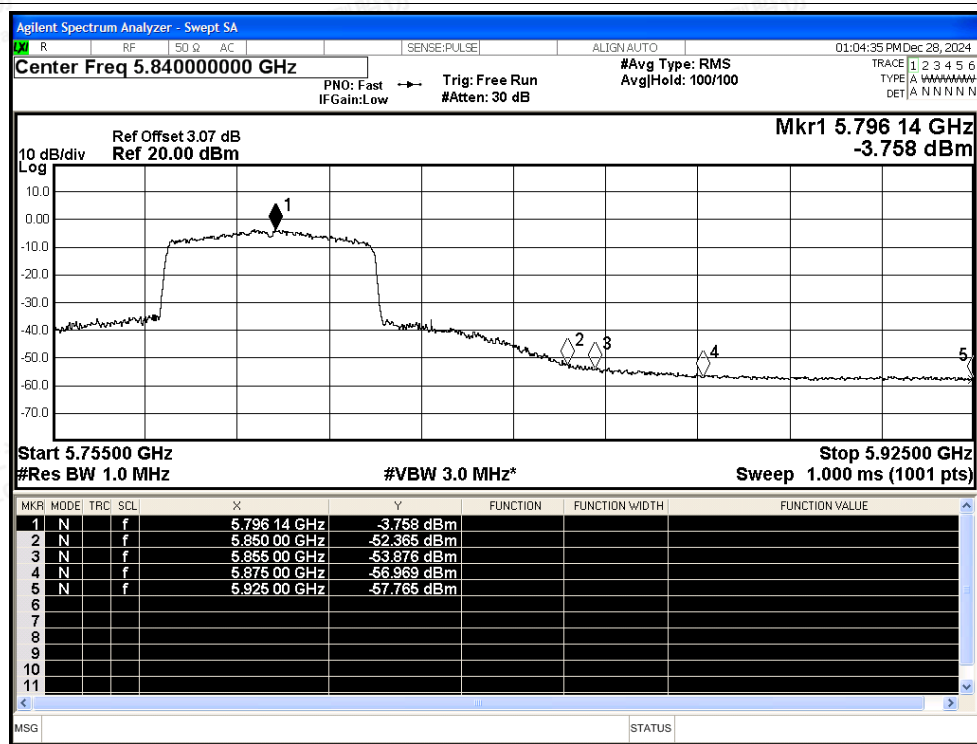

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | a    | 5745            | Ant2    | 5744.98                  | -20000               | -3.48           | 25          | Pass    |
| NVNT      | a    | 5785            | Ant2    | 5785                     | 0                    | 0               | 25          | Pass    |
| NVNT      | a    | 5825            | Ant2    | 5825                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5745            | Ant2    | 5744.98                  | -20000               | -3.48           | 25          | Pass    |
| NVNT      | n20  | 5785            | Ant2    | 5785                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5825            | Ant2    | 5824.96                  | -40000               | -6.87           | 25          | Pass    |
| NVNT      | n40  | 5755            | Ant2    | 5755                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n40  | 5795            | Ant2    | 5794.96                  | -40000               | -6.9            | 25          | Pass    |
| NVNT      | ac20 | 5745            | Ant2    | 5745                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5785            | Ant2    | 5785                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5825            | Ant2    | 5824.98                  | -20000               | -3.43           | 25          | Pass    |
| NVNT      | ac40 | 5755            | Ant2    | 5755                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac40 | 5795            | Ant2    | 5794.96                  | -40000               | -6.9            | 25          | Pass    |
| NVNT      | ax20 | 5745            | Ant2    | 5745                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax20 | 5785            | Ant2    | 5785                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ax20 | 5825            | Ant2    | 5825.02                  | 20000                | 3.43            | 25          | Pass    |
| NVNT      | ax40 | 5755            | Ant2    | 5754.96                  | -40000               | -6.95           | 25          | Pass    |
| NVNT      | ax40 | 5795            | Ant2    | 5794.96                  | -40000               | -6.9            | 25          | Pass    |






## Test Graphs

## Freq. Stability NVNT a 5745MHz Ant2

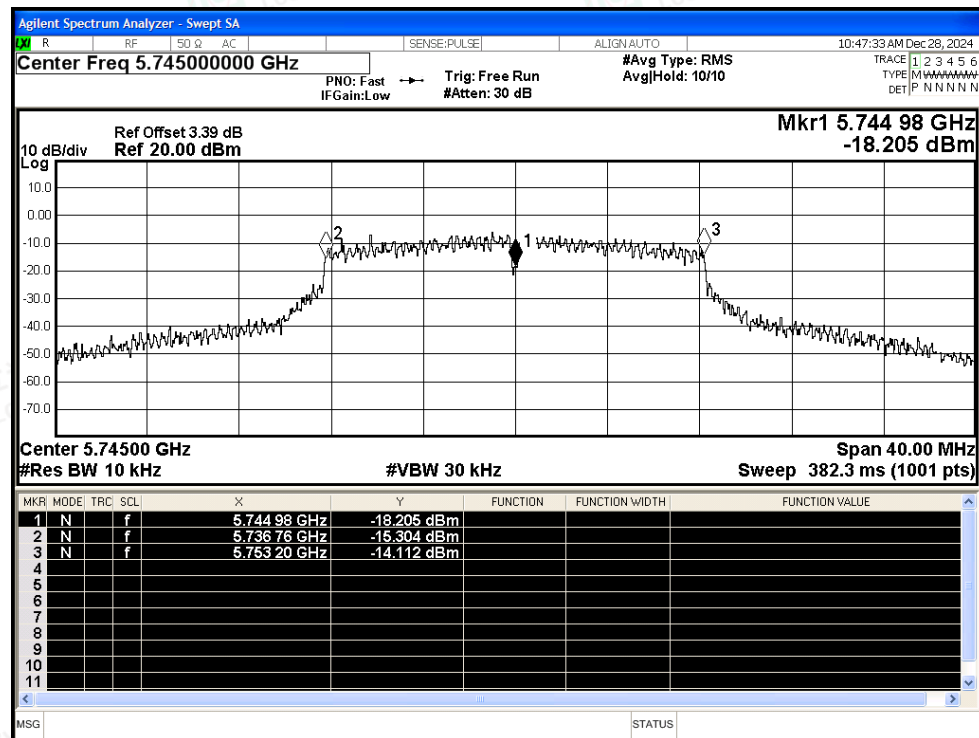


## Freq. Stability NVNT a 5785MHz Ant2

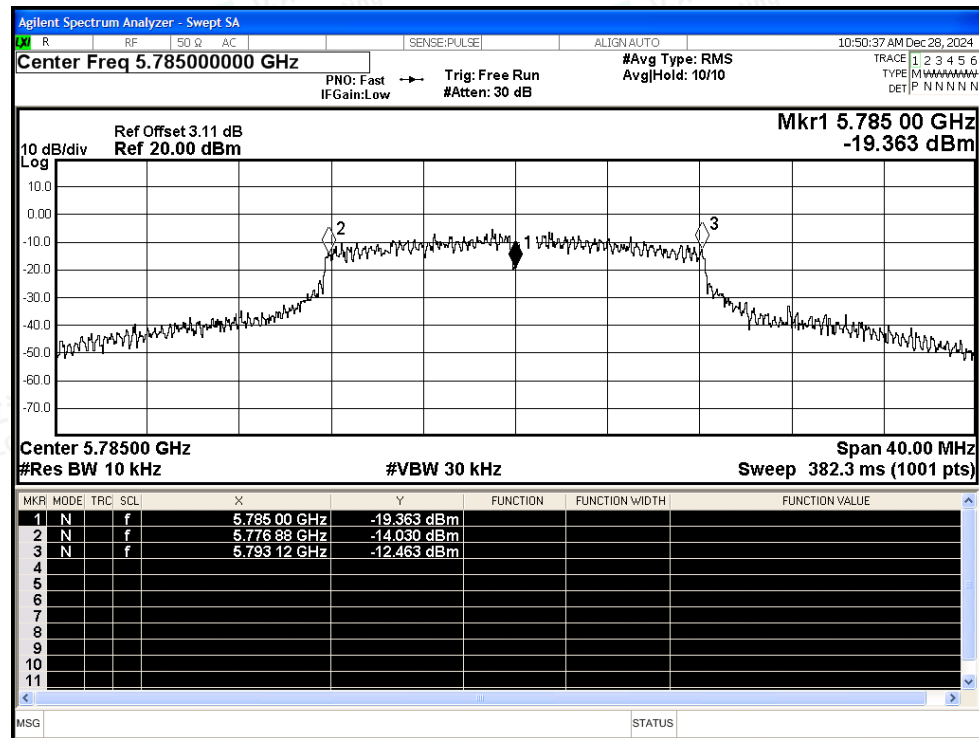




## Freq. Stability NVNT a 5825MHz Ant2

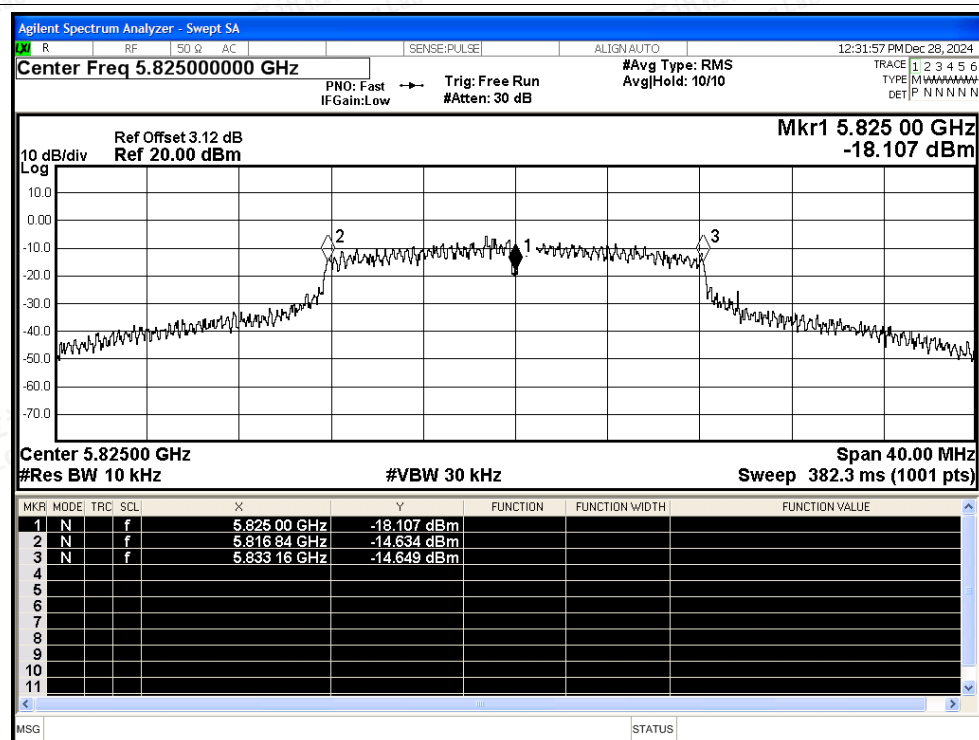

## Freq. Stability NVNT n20 5745MHz Ant2

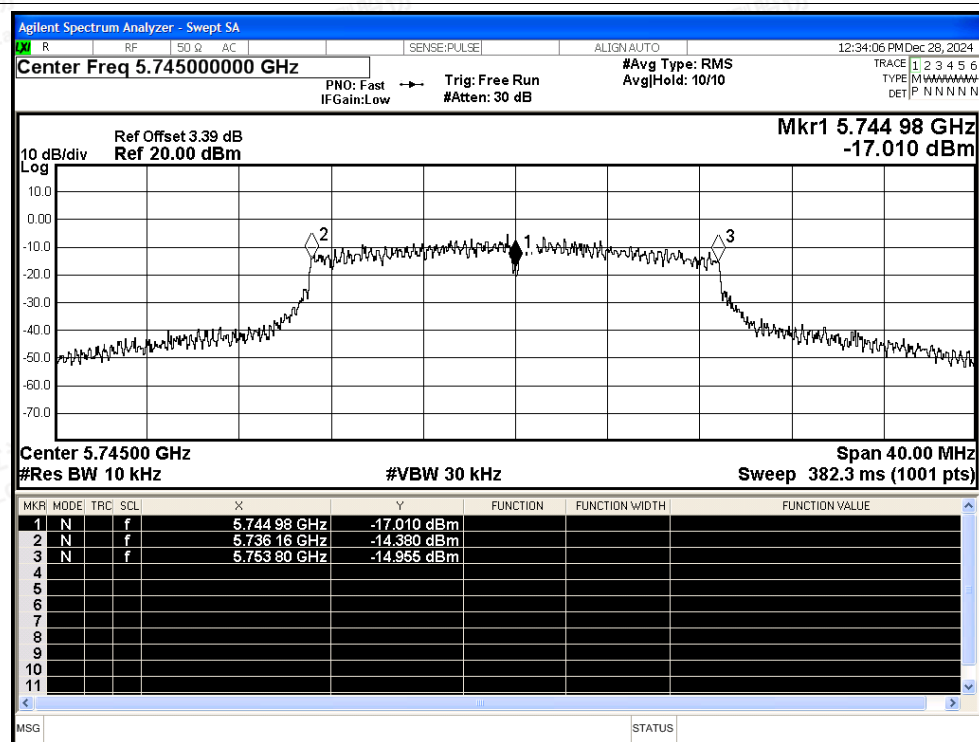

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n20 5785MHz Ant2

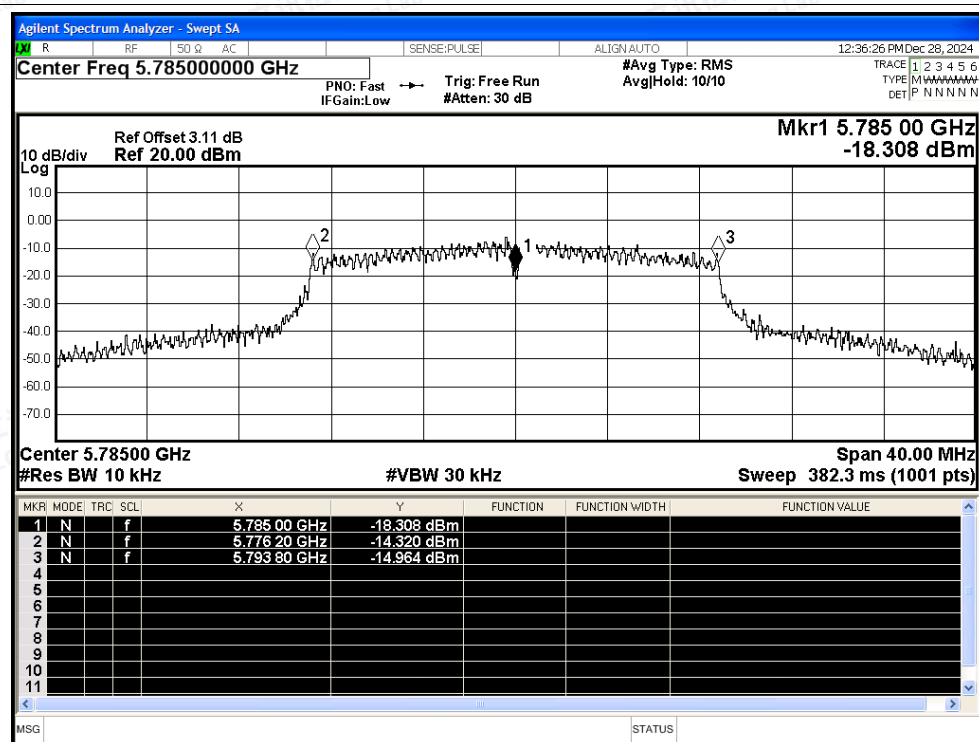


## Freq. Stability NVNT n20 5825MHz Ant2

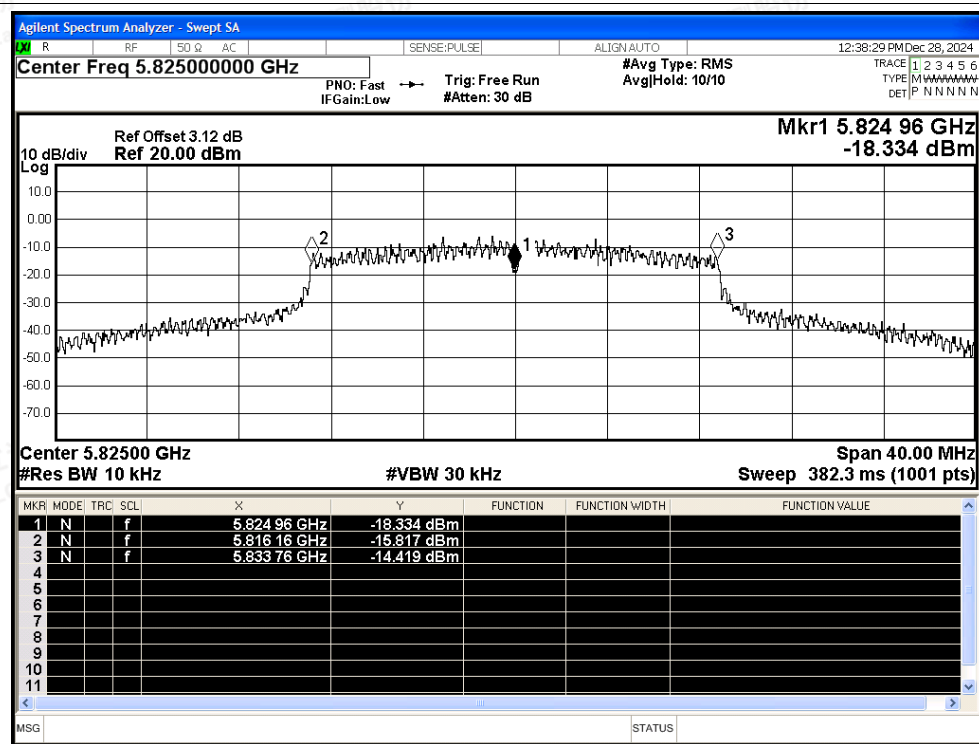




## Freq. Stability NVNT n40 5755MHz Ant2

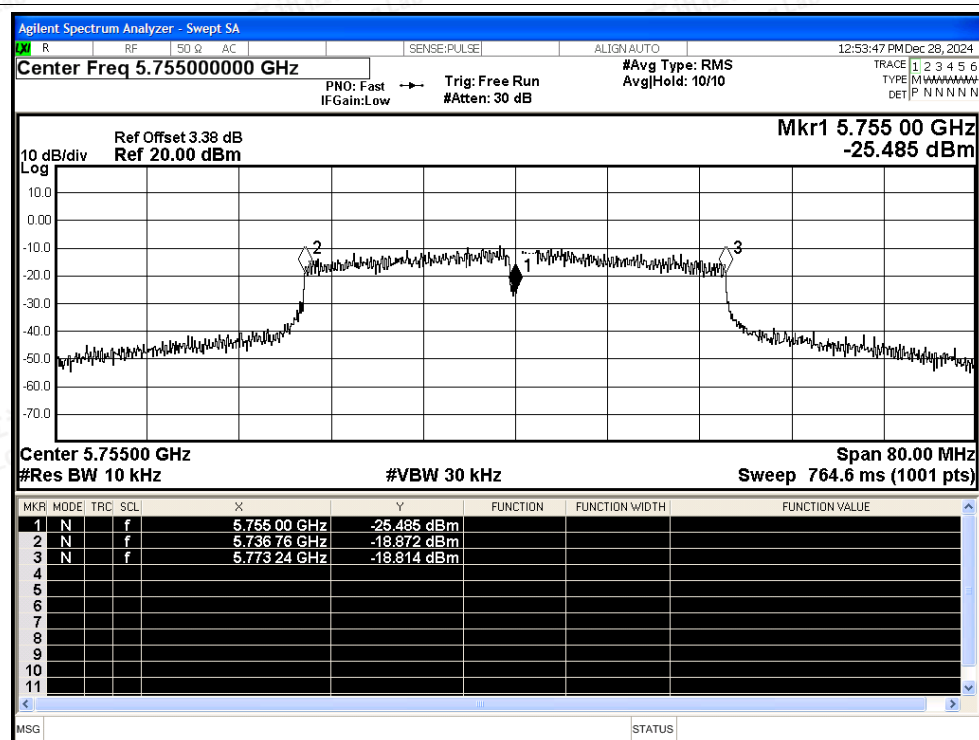

## Freq. Stability NVNT n40 5795MHz Ant2

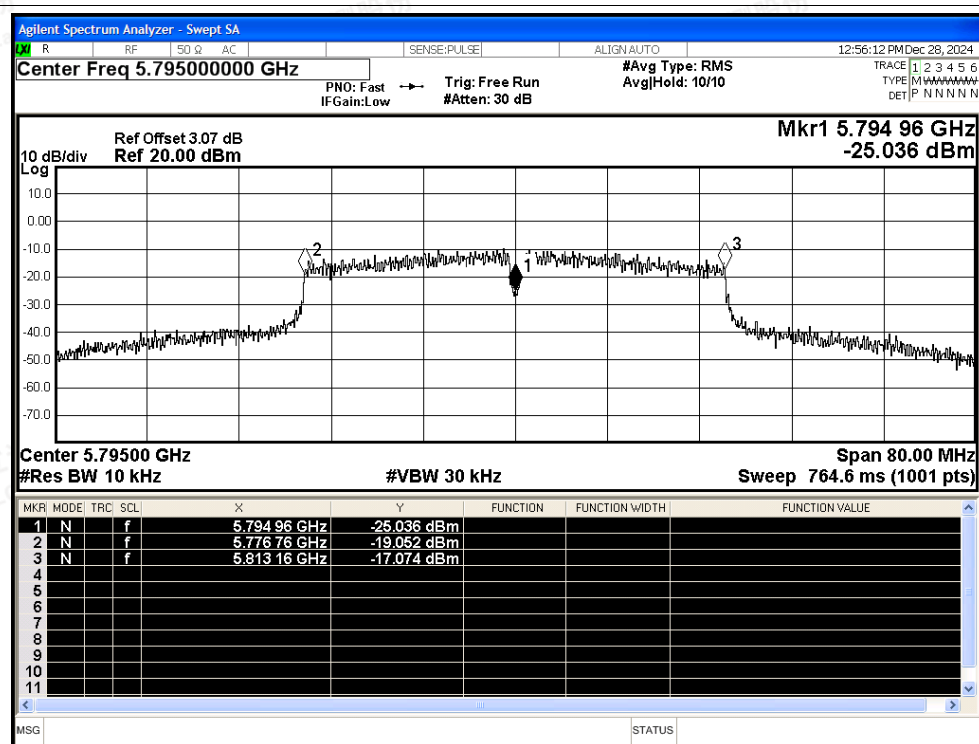

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5745MHz Ant2

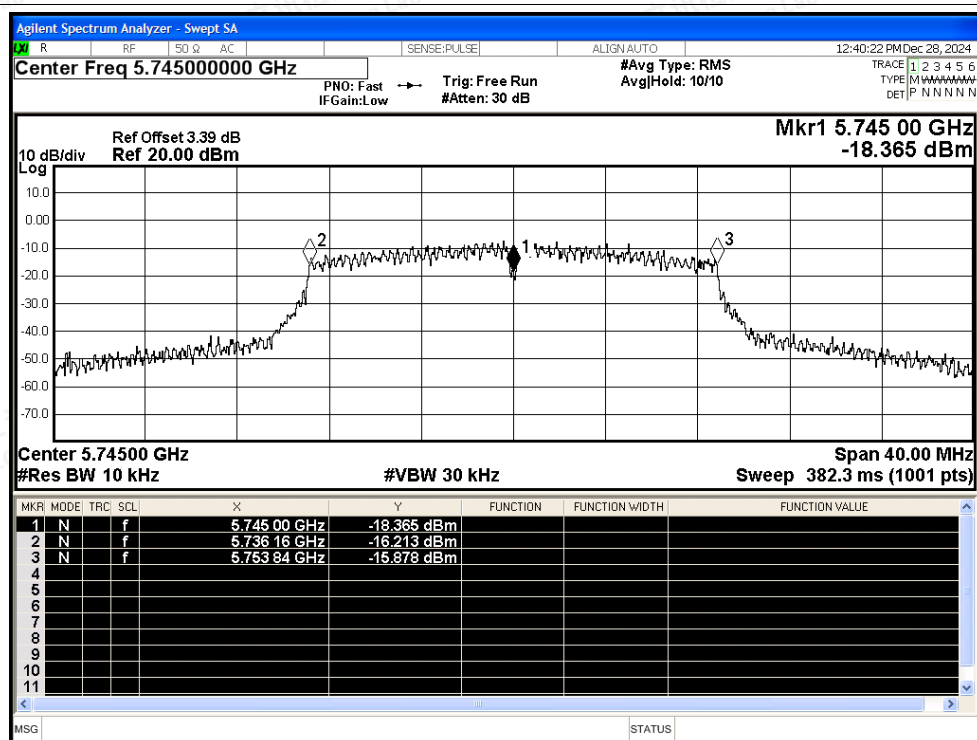

## Freq. Stability NVNT ac20 5785MHz Ant2

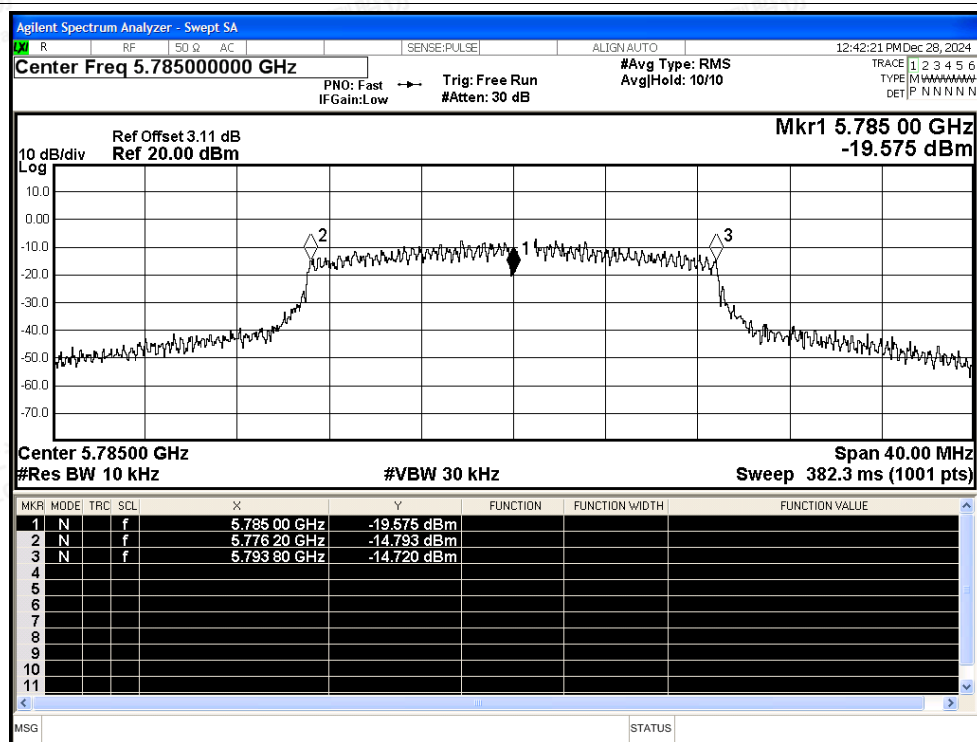

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ac20 5825MHz Ant2

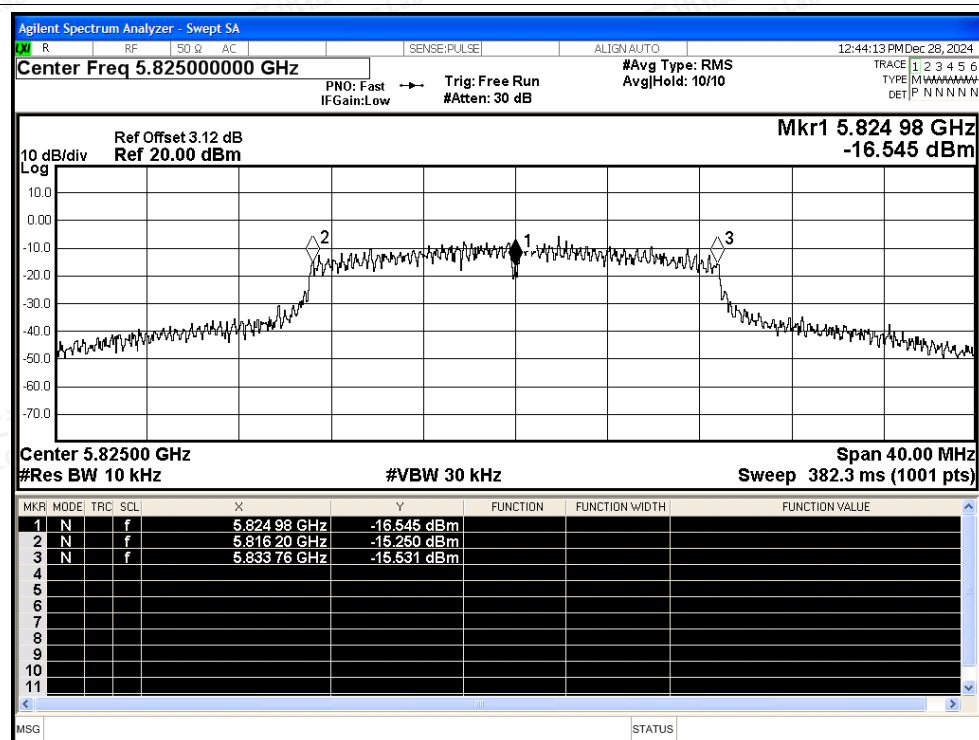


## Freq. Stability NVNT ac40 5755MHz Ant2

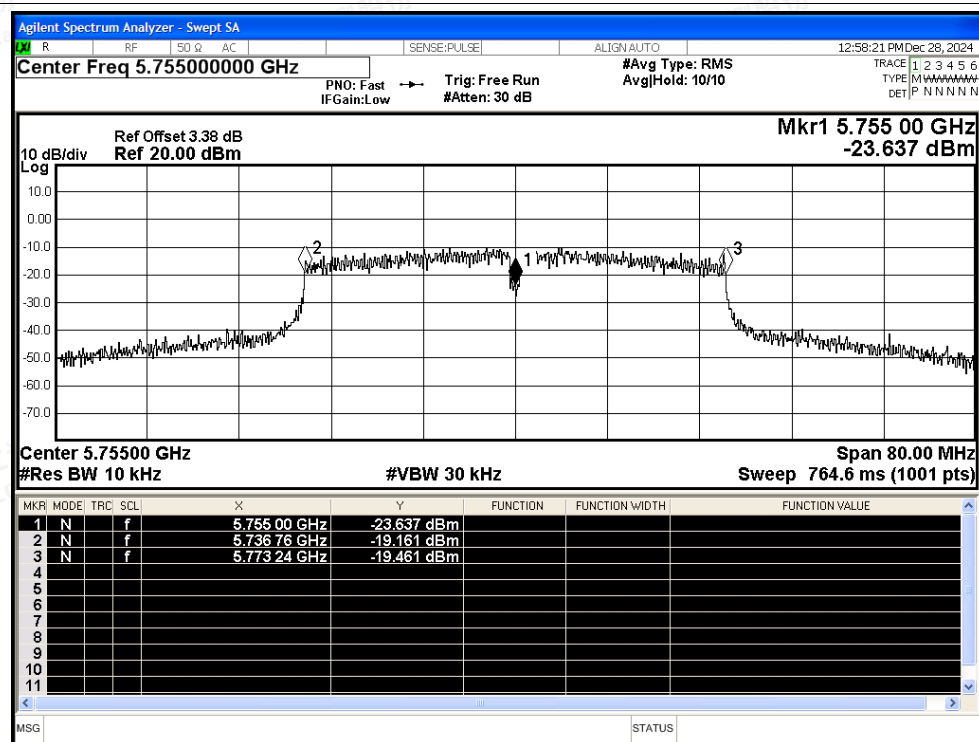




## Freq. Stability NVNT ac40 5795MHz Ant2

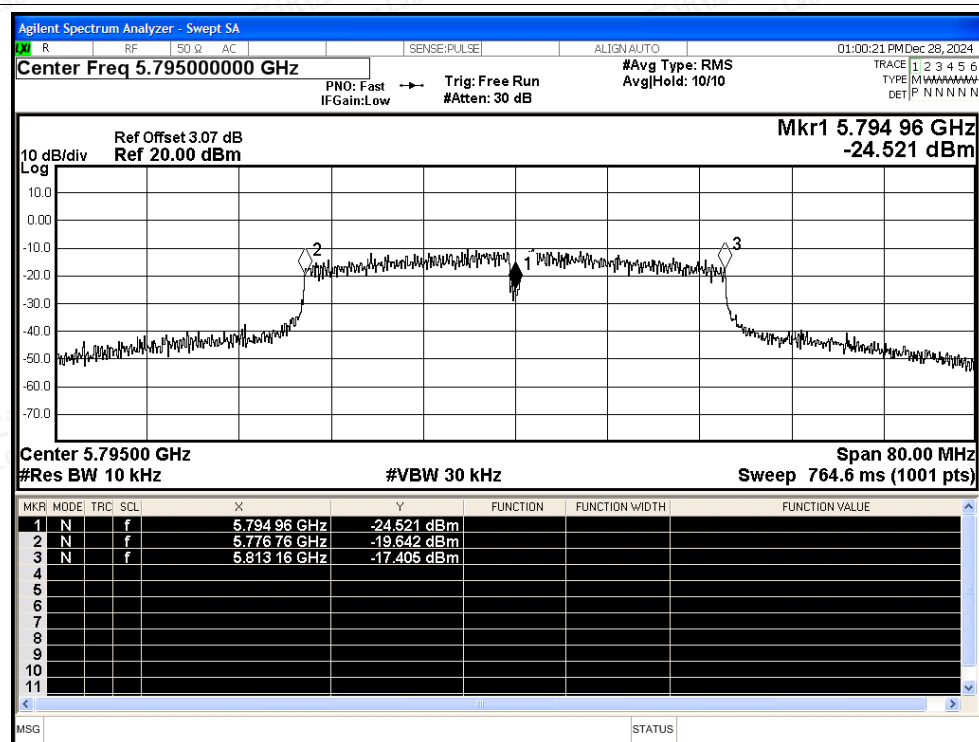


## Freq. Stability NVNT ax20 5745MHz Ant2

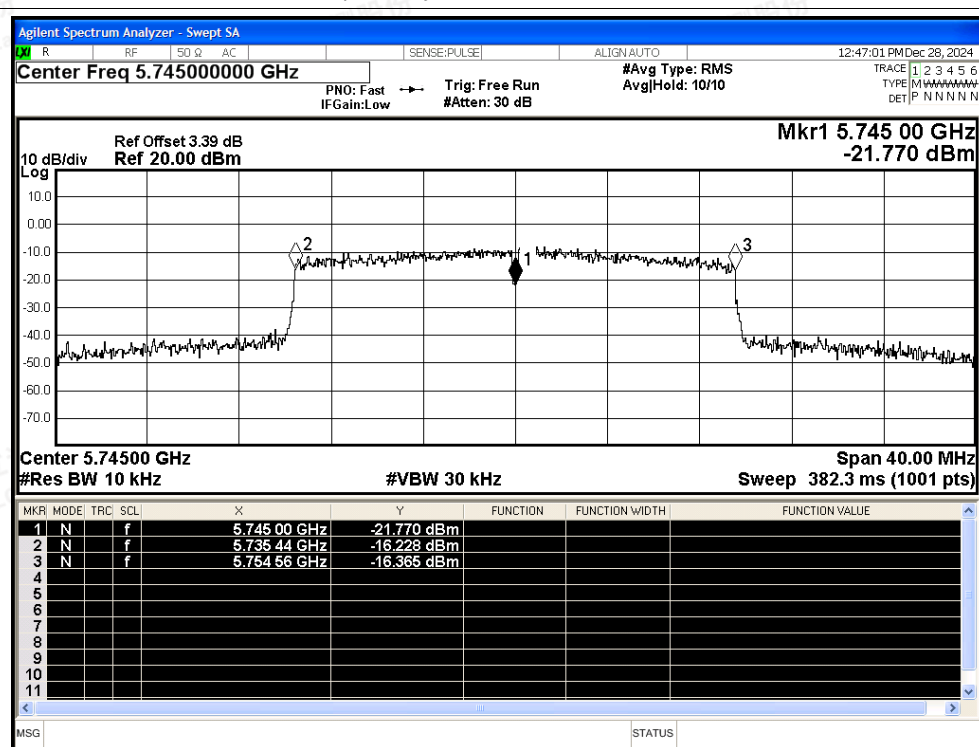




## Freq. Stability NVNT ax20 5785MHz Ant2

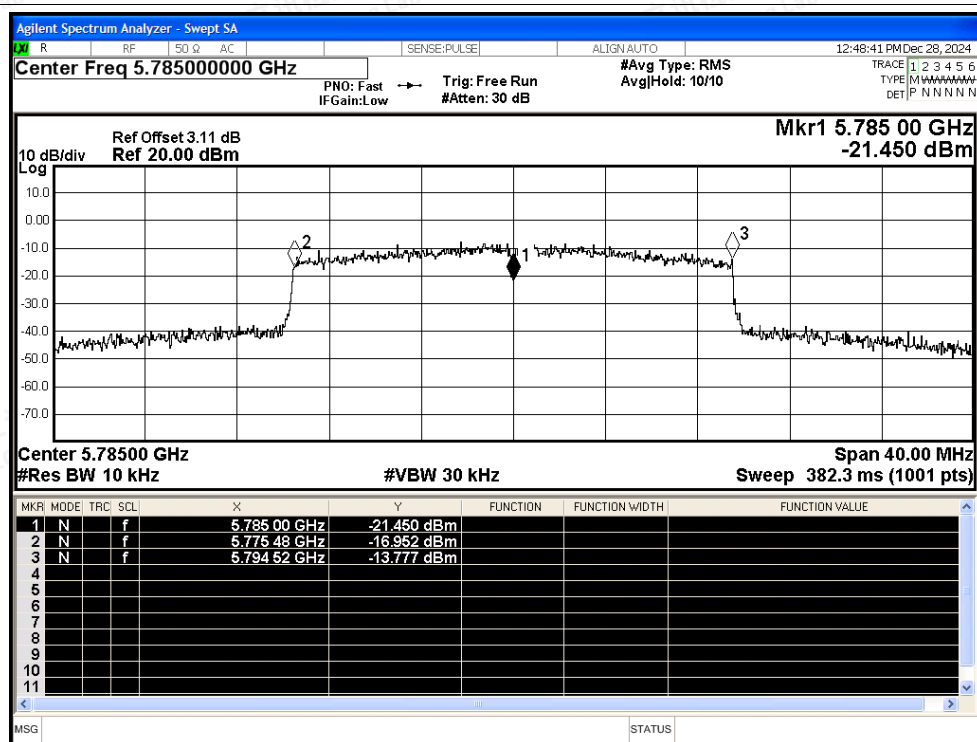

## Freq. Stability NVNT ax20 5825MHz Ant2

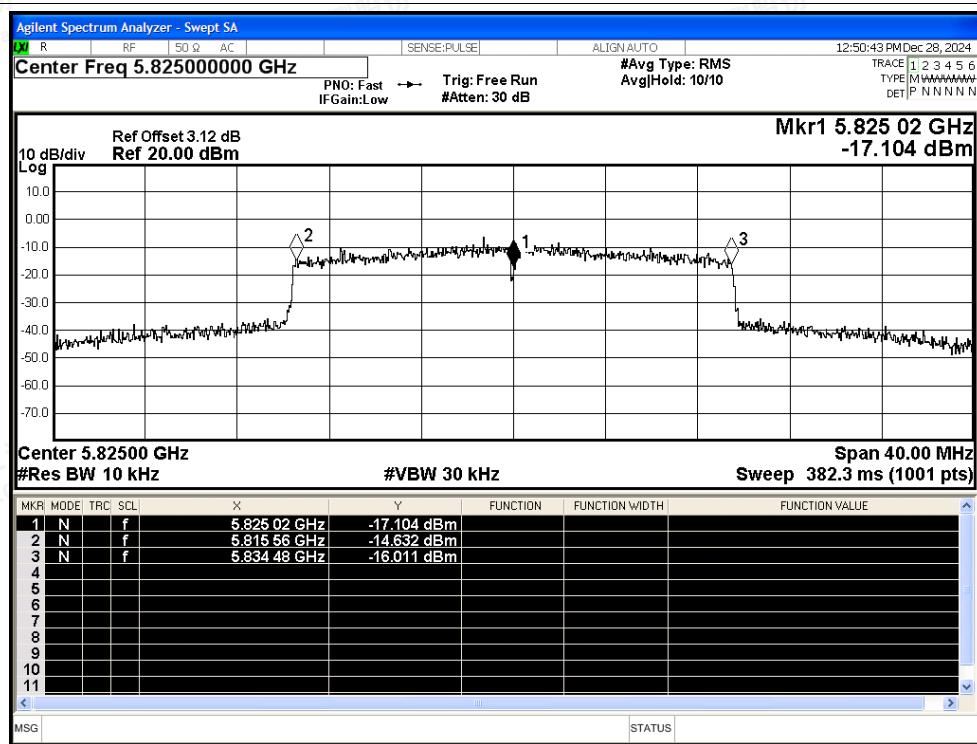

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT ax40 5755MHz Ant2

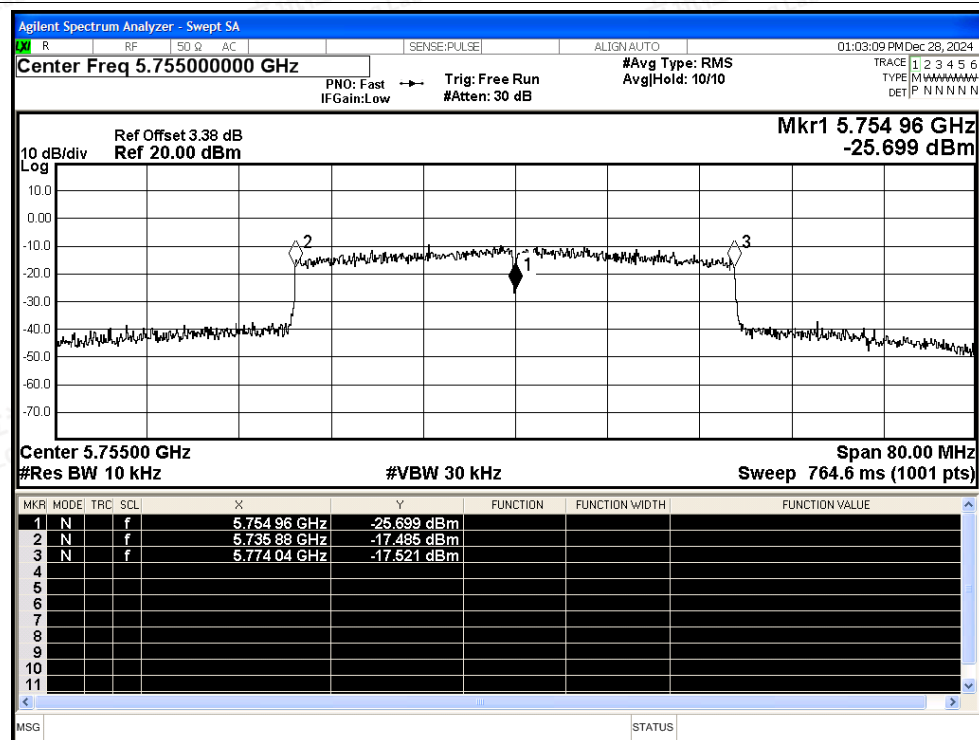

## Freq. Stability NVNT ax40 5795MHz Ant2

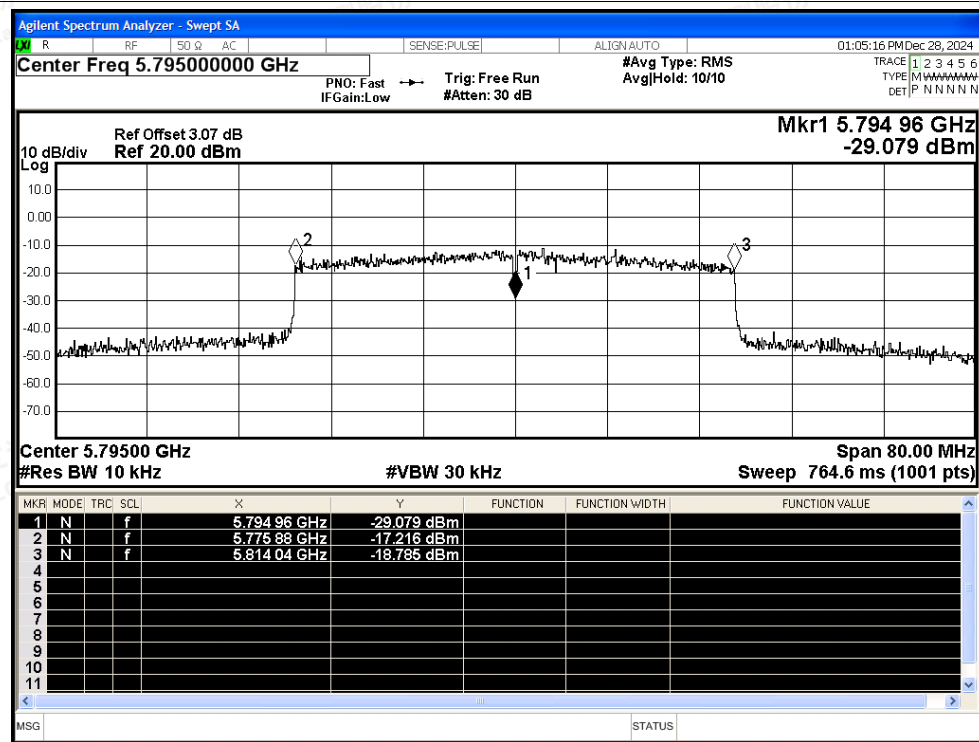

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5745            | Ant2    | 71.05          | 1.48                   | 0.37      |
| NVNT      | a    | 5785            | Ant2    | 72.8           | 1.38                   | 0.37      |
| NVNT      | a    | 5825            | Ant2    | 71.05          | 1.48                   | 0.37      |
| NVNT      | n20  | 5745            | Ant2    | 68.67          | 1.63                   | 0.4       |
| NVNT      | n20  | 5785            | Ant2    | 71.29          | 1.47                   | 0.4       |
| NVNT      | n20  | 5825            | Ant2    | 69.53          | 1.58                   | 0.4       |
| NVNT      | n40  | 5755            | Ant2    | 54.91          | 2.6                    | 0.82      |
| NVNT      | n40  | 5795            | Ant2    | 52.78          | 2.78                   | 0.82      |
| NVNT      | ac20 | 5745            | Ant2    | 71.38          | 1.46                   | 0.4       |
| NVNT      | ac20 | 5785            | Ant2    | 69.6           | 1.57                   | 0.4       |
| NVNT      | ac20 | 5825            | Ant2    | 69.63          | 1.57                   | 0.4       |
| NVNT      | ac40 | 5755            | Ant2    | 55.07          | 2.59                   | 0.81      |
| NVNT      | ac40 | 5795            | Ant2    | 54.8           | 2.61                   | 0.81      |
| NVNT      | ax20 | 5745            | Ant2    | 63.67          | 1.96                   | 0.52      |
| NVNT      | ax20 | 5785            | Ant2    | 65.43          | 1.84                   | 0.52      |
| NVNT      | ax20 | 5825            | Ant2    | 64.25          | 1.92                   | 0.52      |
| NVNT      | ax40 | 5755            | Ant2    | 47.44          | 3.24                   | 1.01      |
| NVNT      | ax40 | 5795            | Ant2    | 49.35          | 3.07                   | 1.01      |






## Test Graphs

## Duty Cycle NVNT a 5745MHz Ant2

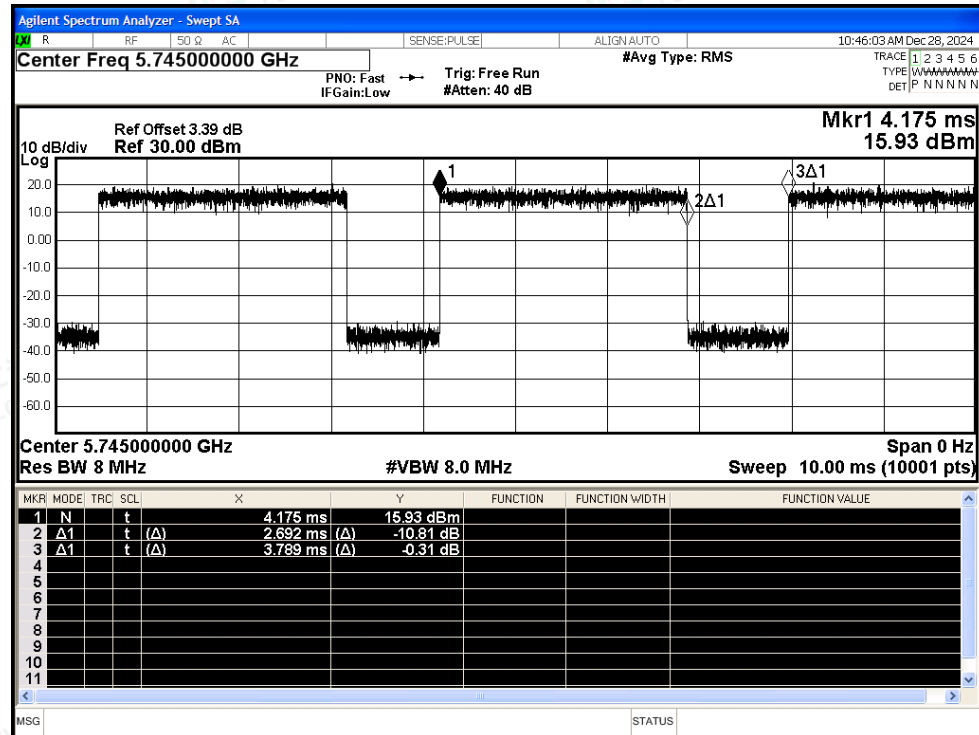

## Duty Cycle NVNT a 5785MHz Ant2

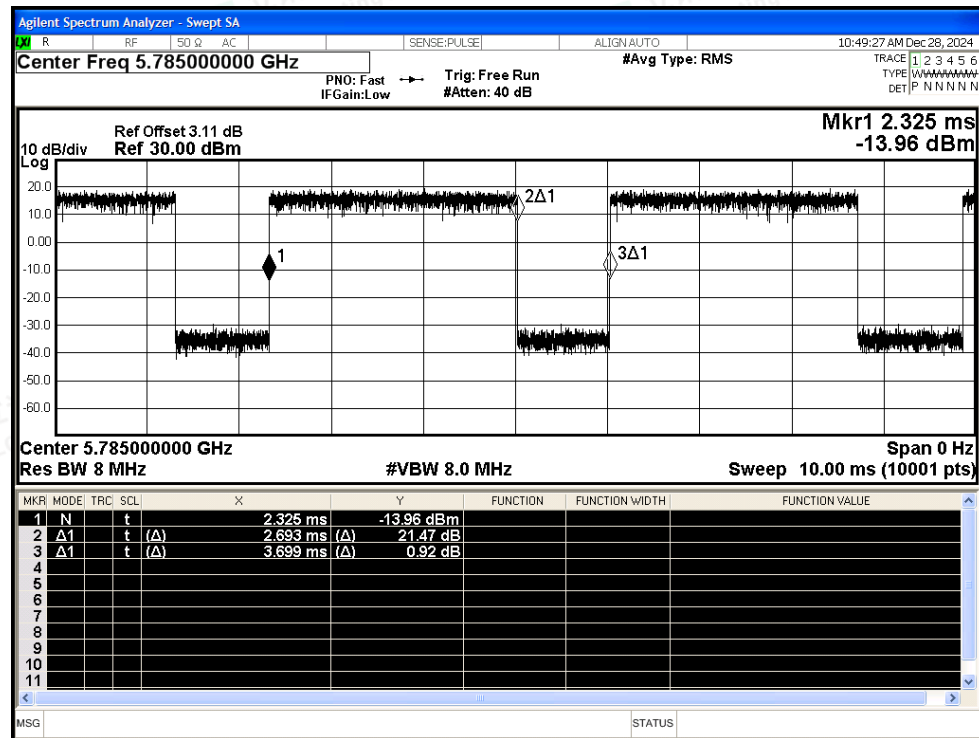

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT a 5825MHz Ant2

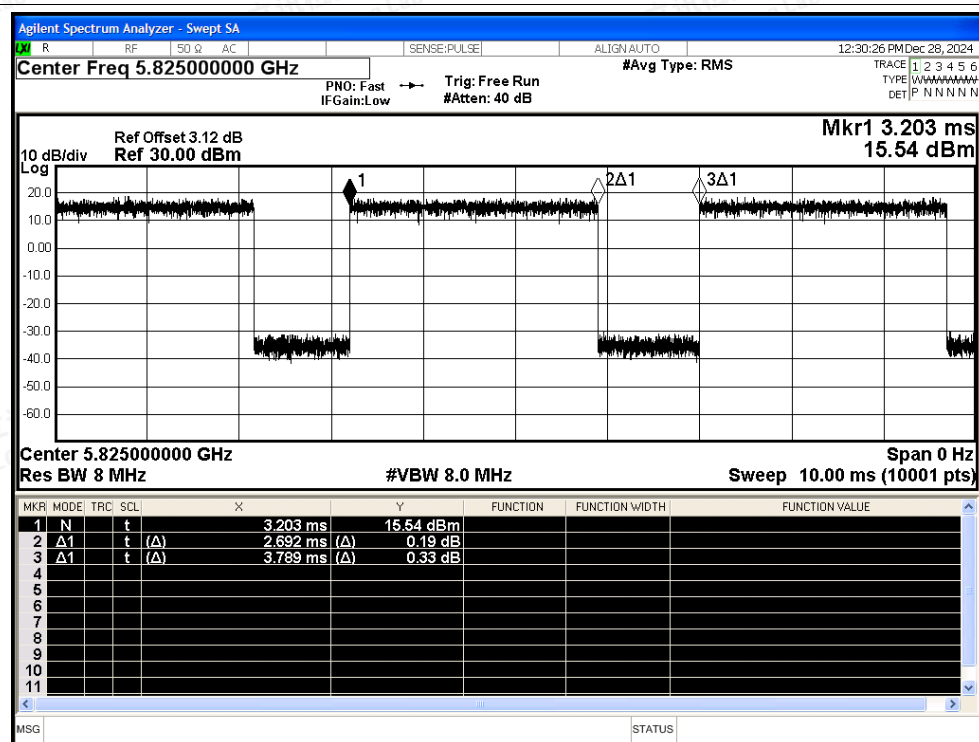

## Duty Cycle NVNT n20 5745MHz Ant2

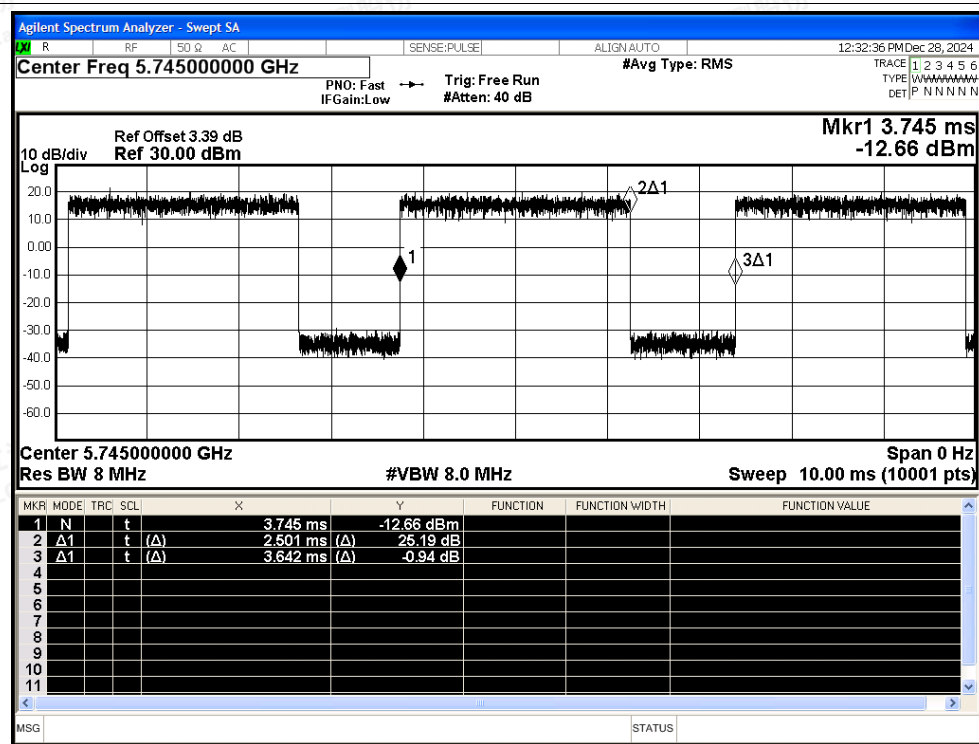

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT n20 5785MHz Ant2

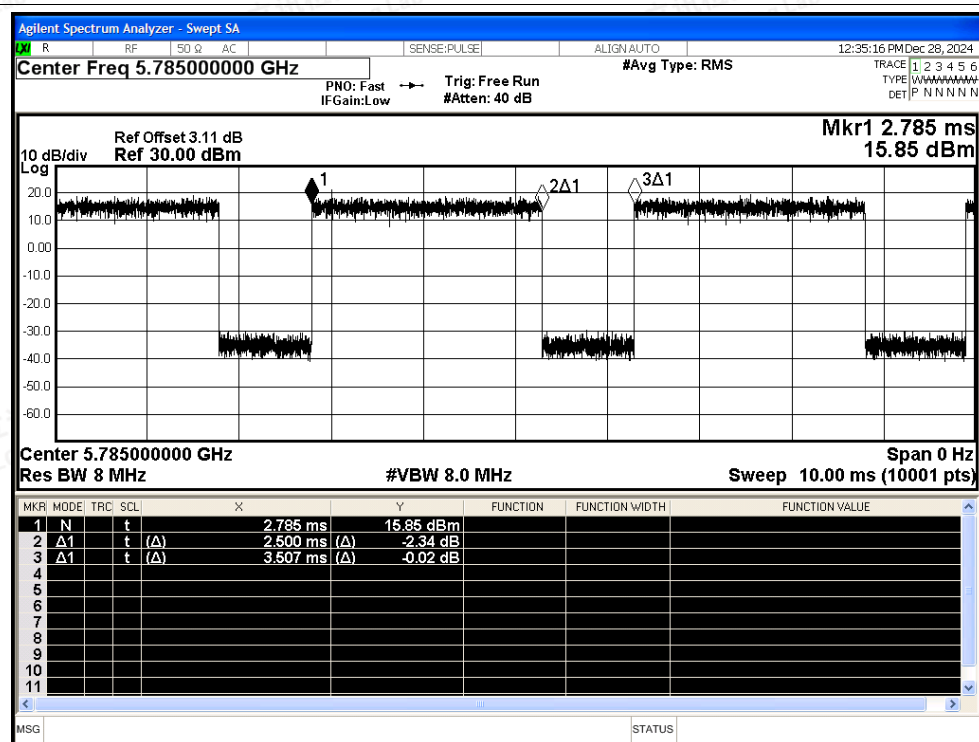

## Duty Cycle NVNT n20 5825MHz Ant2


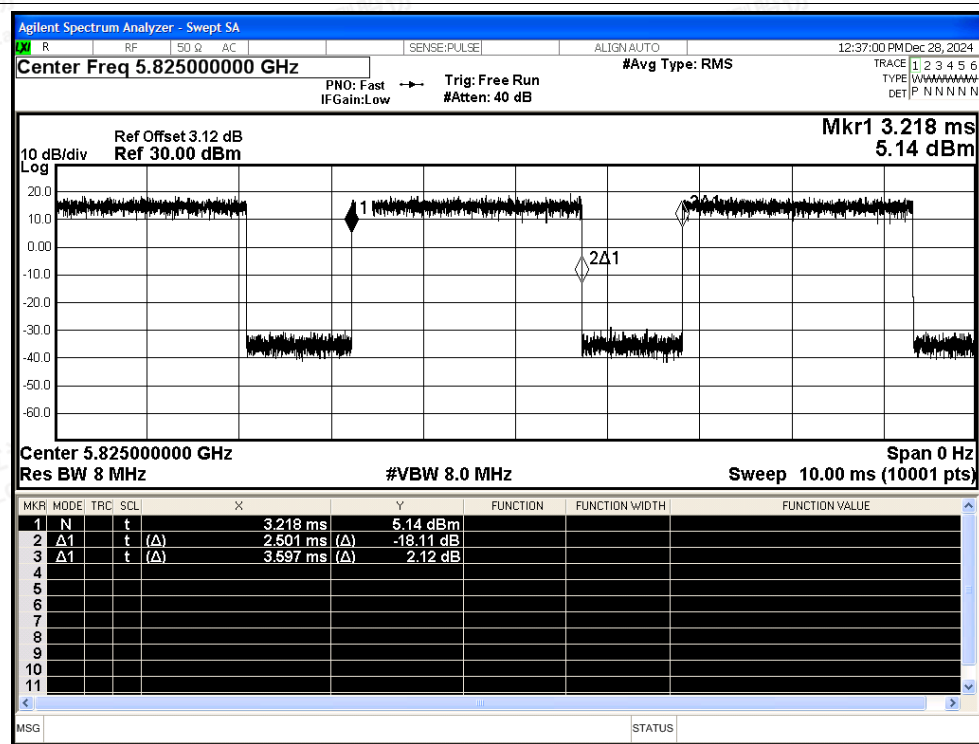


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

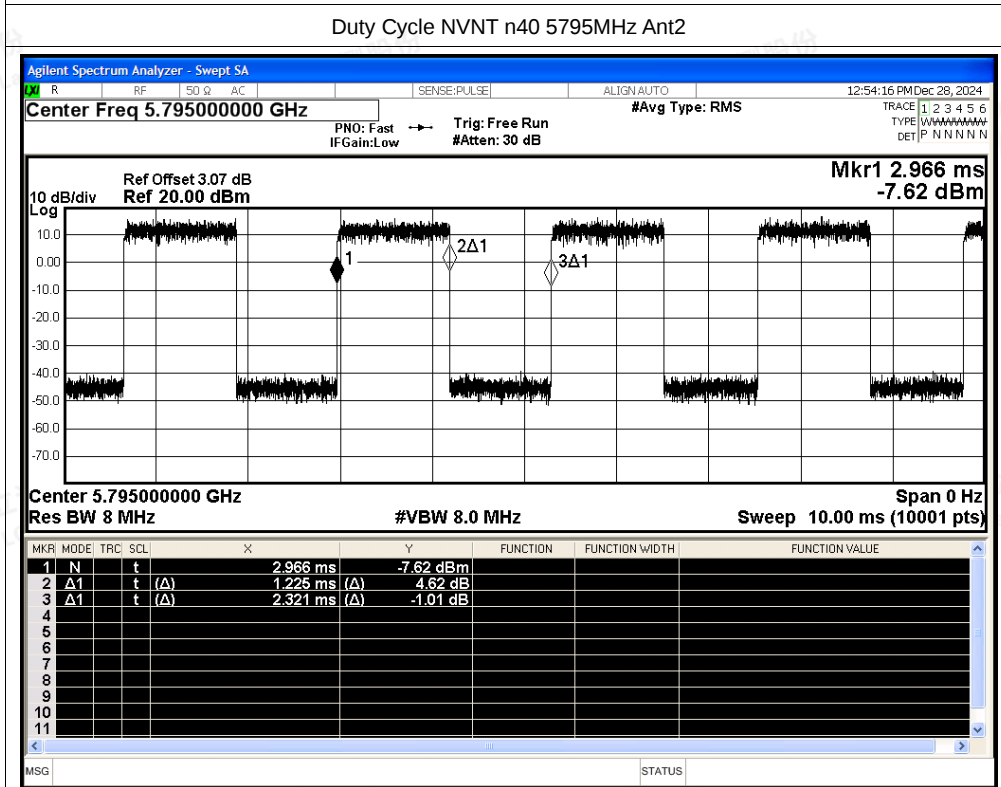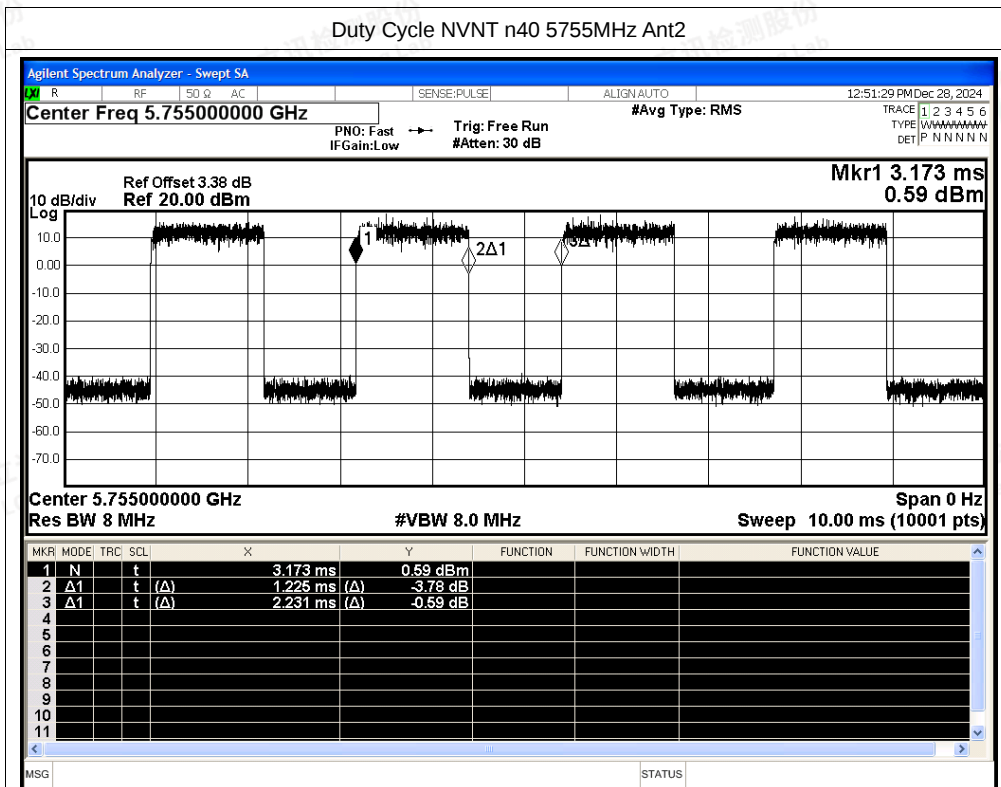




## Duty Cycle NVNT ac20 5745MHz Ant2

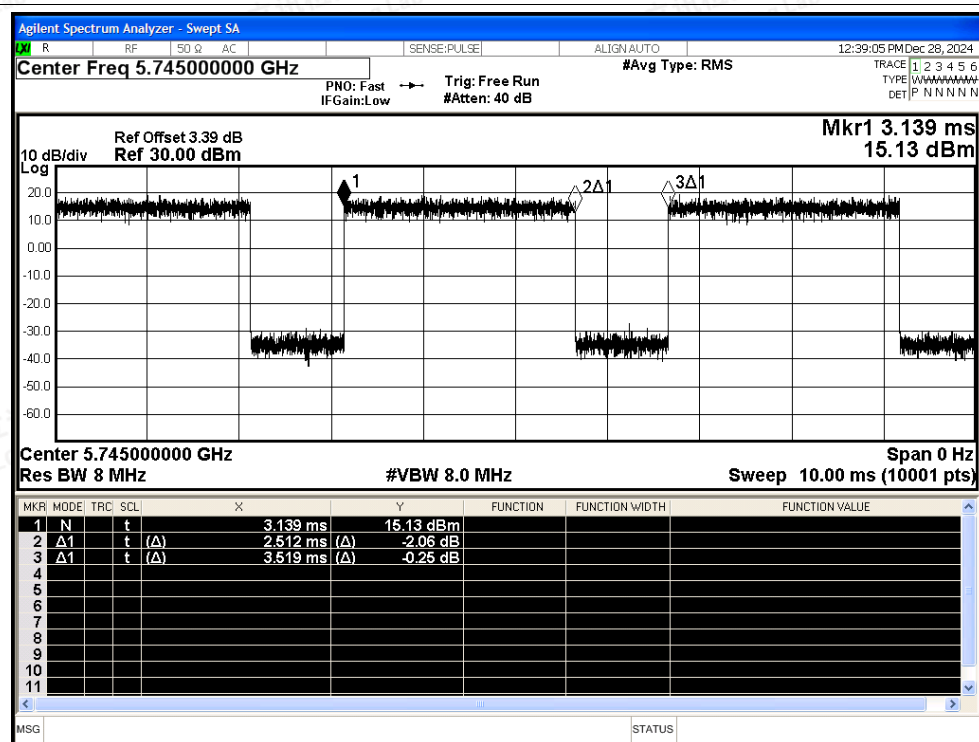

## Duty Cycle NVNT ac20 5785MHz Ant2

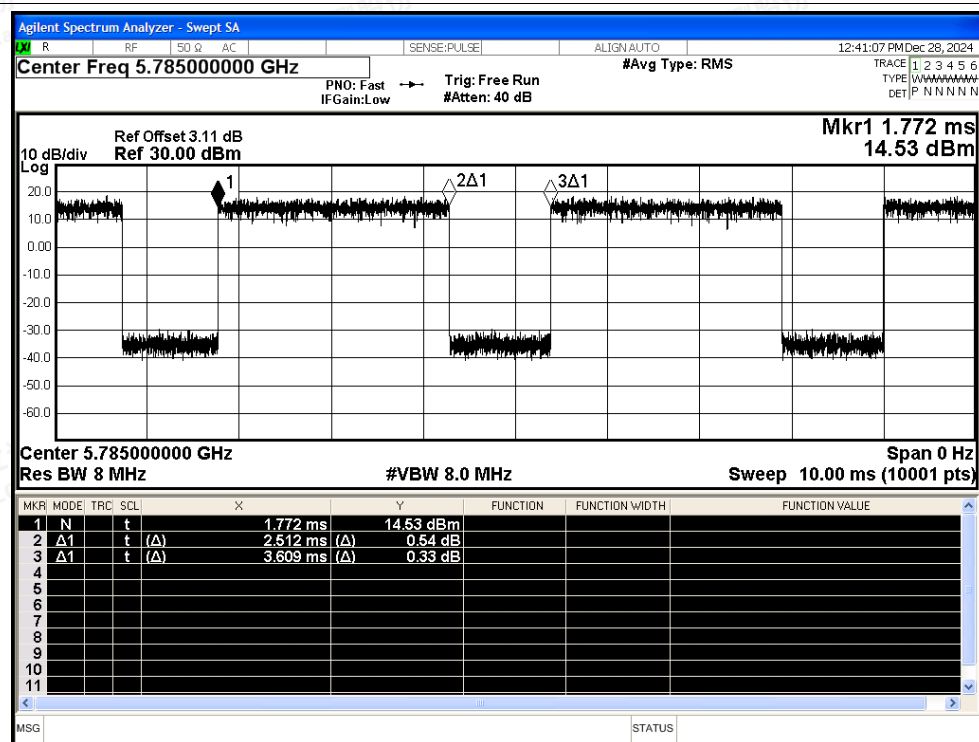

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ac20 5825MHz Ant2

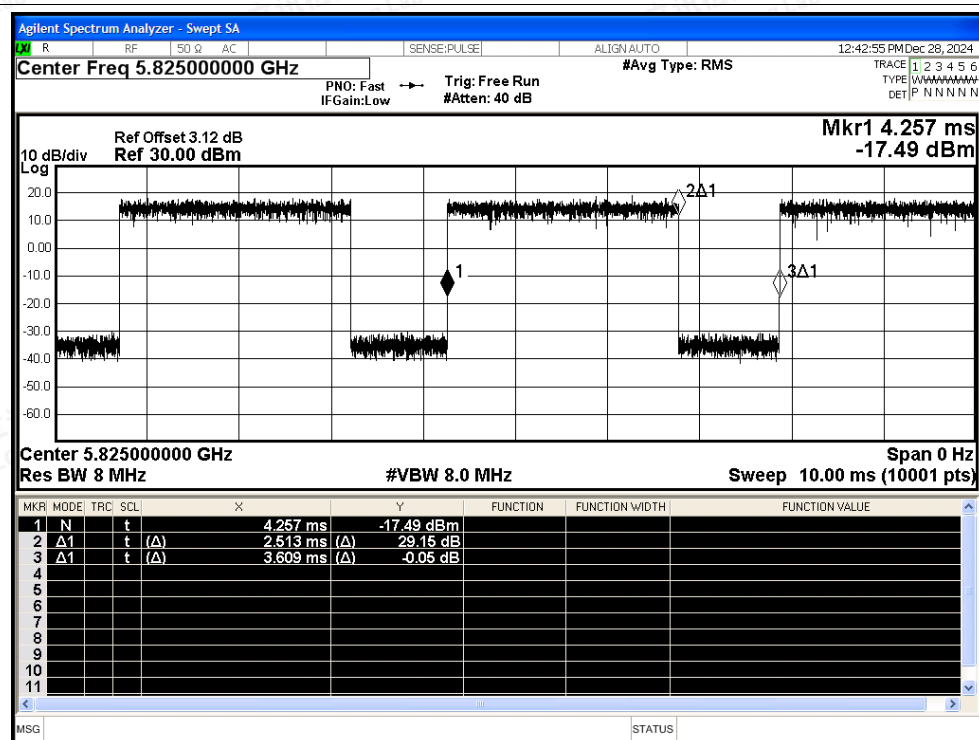

## Duty Cycle NVNT ac40 5755MHz Ant2

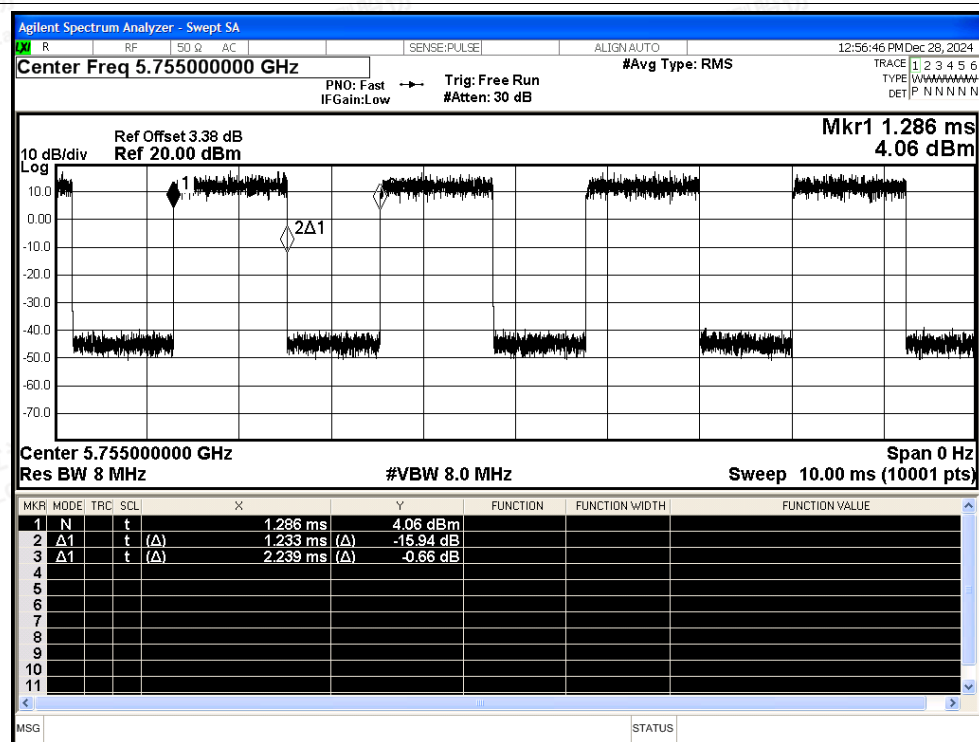

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ac40 5795MHz Ant2

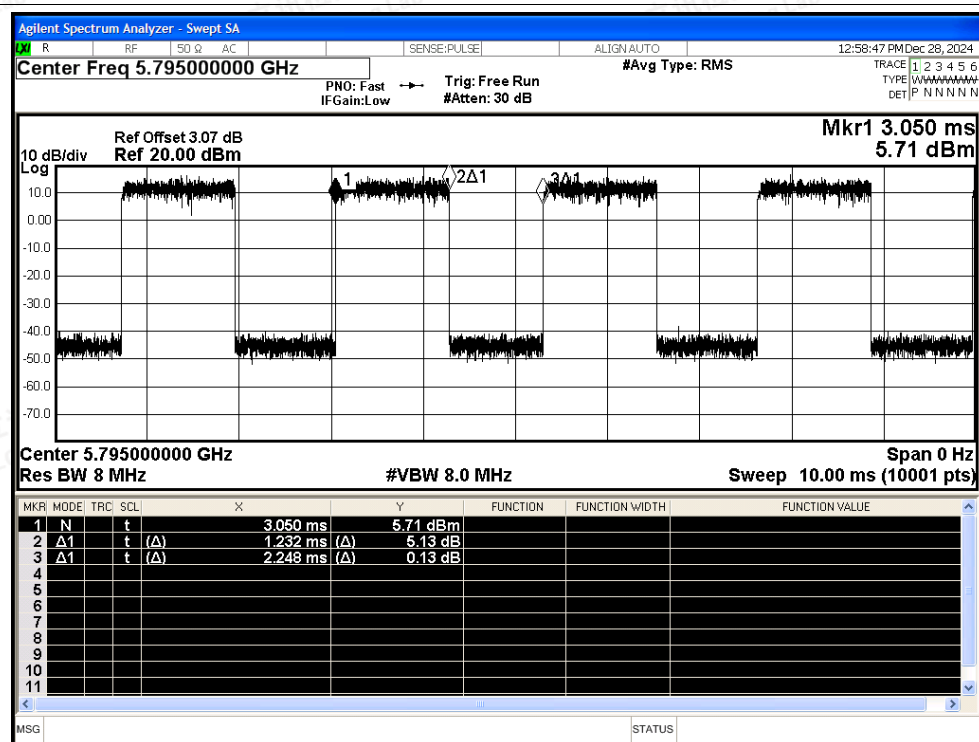

## Duty Cycle NVNT ax20 5745MHz Ant2

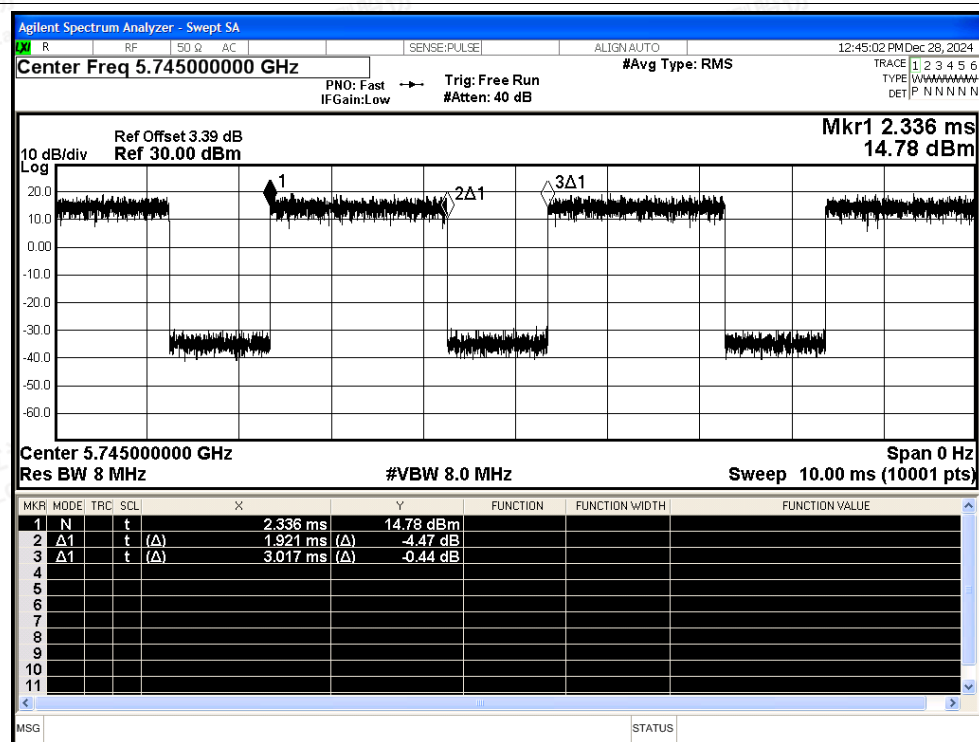

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ax20 5785MHz Ant2

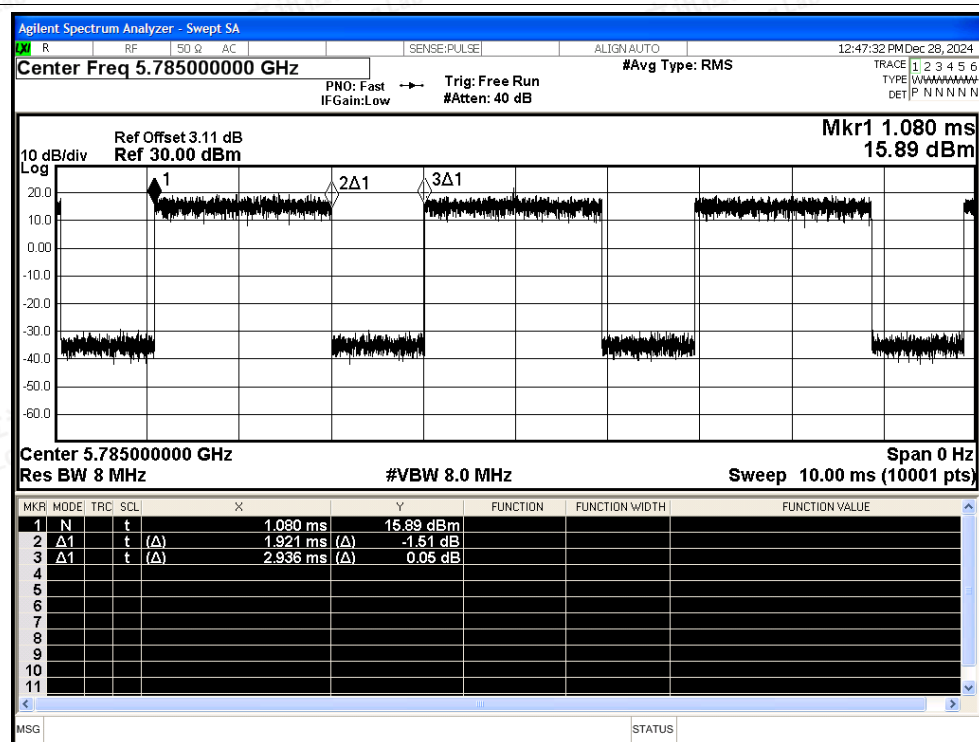

## Duty Cycle NVNT ax20 5825MHz Ant2

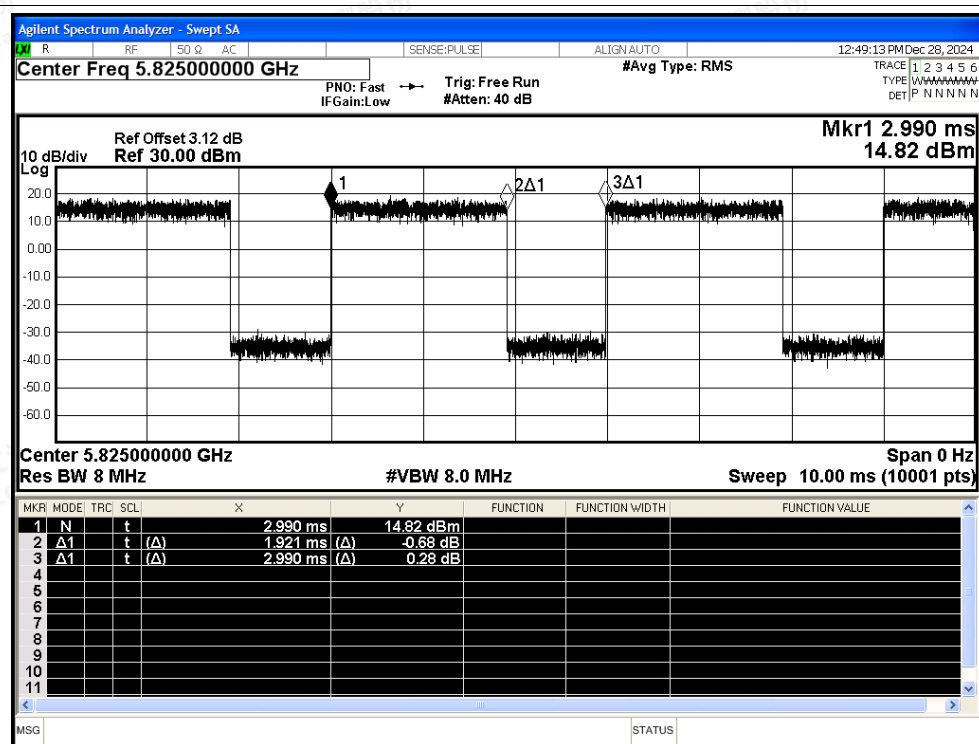

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT ax40 5755MHz Ant2

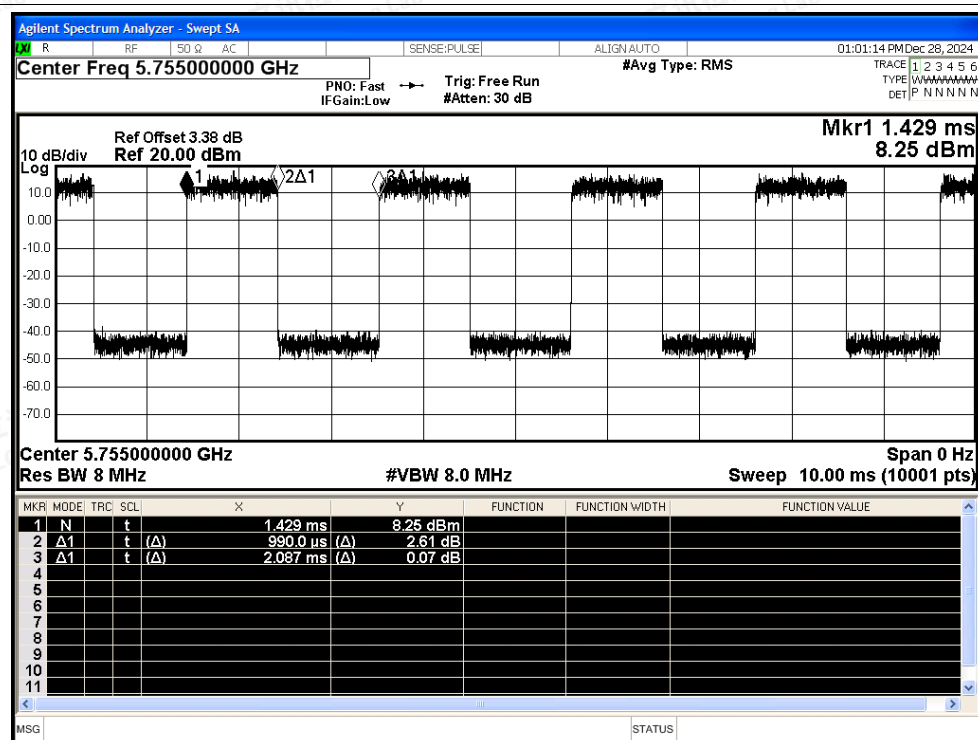

## Duty Cycle NVNT ax40 5795MHz Ant2

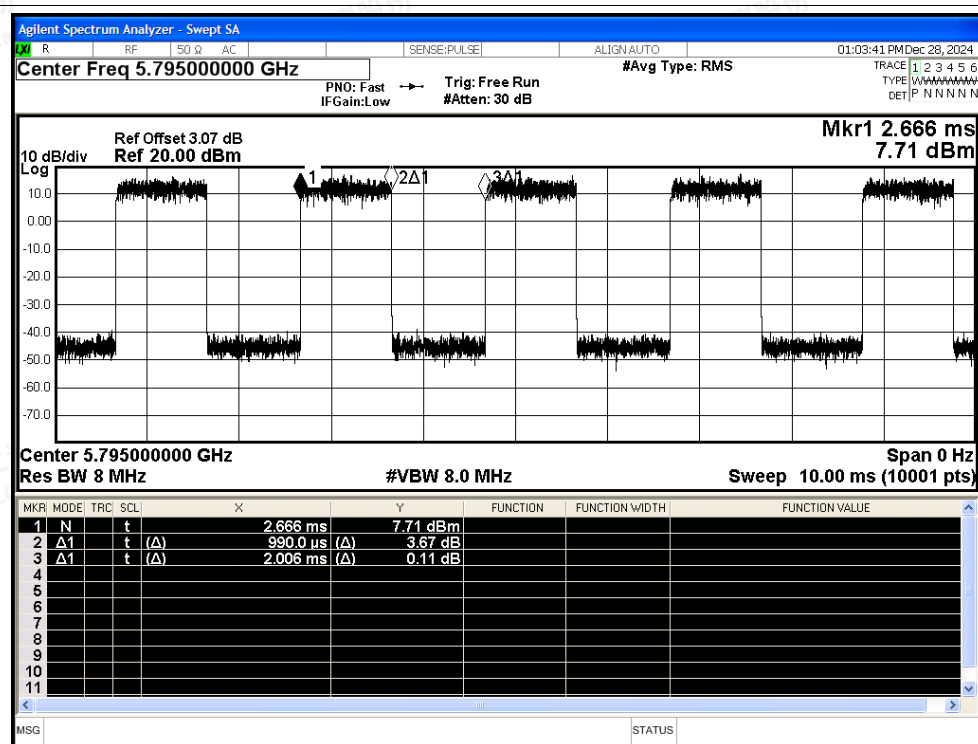

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity