

说明书尺寸: 70\*90mm

说明书材质: 105克哑粉, 双铜纸


印刷颜色: 同文档颜色

正面



Listen To The Sky

## ANC WD66 Earbuds User Manual

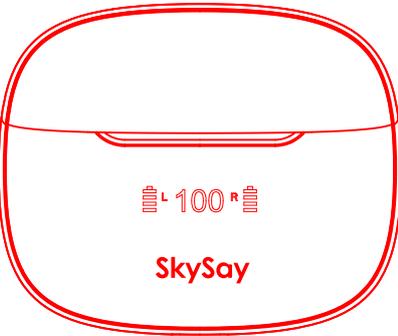


FCC ID: 2



Thank you for choosing our product, hope the fashionable appearance and high quality stereo can enrich your life.

**Note: Please fully charge it with the charging case before the first use when you receive the product.**

### Product Overview

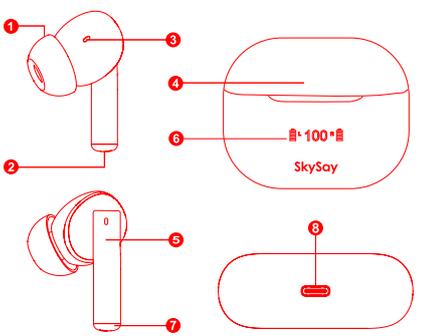

- 1 Eartips
- 4 Charging Box Battery Indicator
- 7 Charging Pin
- 2 Microphone
- 5 Touch Multi-function Button(MFB)
- 6 LED Indicator
- 3 Tone hole
- 8 Type-C Charge input


### Charging

Please put the earbuds into the box before the first use, and connect the charging cable with the charging box to fully charge.

Put the earbuds into the corresponding slot to ensure that the charging contact of the earbuds are in contact with the metal tabs. Please charge the earbuds with a 5V/1A charger. Full charging time is 1.5 hours, and the battery level will display 100%.

If it is not used for a long time, it should be charged at least once every three months.

### Getting Starts

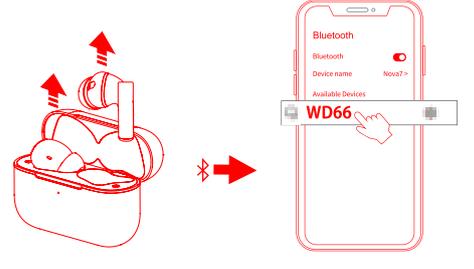

1. Take out the earbuds (Earbuds auto power on)
2. After open the phone Bluetooth, Click the < WD66 > to Pairing

反面

### Functions

 L R	 L R	 L R	 L R
Play /Pause	Switch Song	Adjust Volume	Power off (When no connected)
 L R	 L R	 L	 R
Answer/Hang up	Reject Call	Voice Assistant	Activate/Deactivate ANC

X1: Click Once      2S: Press and hold for 2 seconds

X2: Click 2 times      X3: Click 3 times

**Reset Setting:** With the earbuds turned on and not connected to a phone, simultaneously tap each earbud four times to clear pairing and power off.

### Getting Off

**The earbuds will turn off automatically if any of the following conditions occur:**

1. You return the earbuds to the charging case.
2. When the earbuds are out of the charging case, but no device has been connected for 5 minutes.
3. When the earbuds battery is low(please charge it in time).

### Hearing Safety

- To avoid hearing damage, do not listen for long time at high volume.
- Do not turn the volume so high that you're unable to hear your surroundings.
- Do not use earbuds while driving.
- In potentially hazardous situations, use caution or temporarily discontinue use.



### Safety Instructions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction

### Basic Parameters

Model: WD66  
Wireless version: V5.3  
Support Wireless profile: SPP/HFP/A2DP/AVCTP/HID  
Audio decoding format: MP2, MP3, WMA, APE, FLAC, AAC, MP4, M4A, WAV, AIF, AIFC  
Wireless working frequency: 2.402GHz-2.480GHz  
Receiving power: -90dBm  
Wireless range: >10米  
(TBR): <10m  
Antenna specifications: 3216  
S/N: ≥92dB  
Frequency response: 20Hz~20KHz  
at@1K: 111 dB±2 dB  
Speaker type: 32Ω 13mm  
Max power: 3mW  
microphone sensitivity: -42dB±1dB (1mic)  
Depth of noise reduction: 28dB±1 dB  
Battery: 3.7V 451010 40mAh  
Charging chamber battery: 702030 400mAh  
ShutDown Current: 4mA  
Connect standby current: 3mA  
Normal mode Musical current: 6.5mA  
ANC mode Musical current: 9.0mA  
Talk current: 9.5mA  
Power consumption: 35uA  
Normal mode Music time: 6 hours  
ANC mode Music time: 3.5h  
Standby time: 26 hours  
Normal mode Talk time: 5 hours  
ANC mode Talk time: 4 hours  
Charging input criteria: Type-c, DCSV 500mA  
Charging current of earphone: 40mA  
Charging current: 400mA  
Charging time: 1.5 hours  
Maximum dimension: 64\*53\*28mm



Made in China

1
2
3

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The device has been evaluated to meet general RF exposure requirements, the device can be used in portable exposure condition without restriction