


EB01 中性英文说明书\_84\*64mm 6折300g 单色铜版纸

84.00

64.00

Wireless Transmitter and Receiver  
Operation manual



Please read it carefully before use.

RX Mode/Quick Start

1 Power on

Press and hold the Function key for 3 seconds to power on.

2 Pairing reserve

Double-click the function key to enter pairing mode, and the "RX" indicator light will flash rapidly.

3 Pairing operation

Turn on the wireless switch on your mobile phone or computer, search for KM-EB01 and follow the instructions to pair.

4 Waiting pair

Wait for 1s to 2s seconds. After successful pairing, the RX indicator light will be on. Note: Double-click the function key to pair the next device.

5 Connect AUX ports

Plug the OK paired adapter into the AUX port of the speaker or amplifier. After completion, it can be used normally. For details, see Function Description.

TX Mode/Quick Start

1 Power on

Press and hold the Function key for 3 seconds to power on.

2 Pairing reserve

Push the switch to the middle gear, and the TX indicator will light up. Double-click the function key to enter the pairing state, and the TX indicator will blink quickly.

3 Put Headphones in Pairing Mode

Press and hold the pairing button to enter the pairing state. If there is no pairing button, ensure that the headset is not connected to other wireless devices and is turned on.

4 Waiting pair

Wait for 1s to 2s seconds, and the corresponding TX indicator light will stay on after the pairing is successful. Note: Double-click the function key to pair with a second wireless receiver.

5 Connect AUX ports

Plug the adapter paired with OK into the AUX port of the aircraft or treadmill. It can be used normally after completion. For details, see Function Description.

Product function description 1#

①TX pairing:

TX pairing status indicator to indicate two matching Wireless receiving devices at the same time.

②TX pairing:

RX status indicator, Used to indicate RX status.

③Function key:


Can achieve a variety of functions of the operation.

④Power indicator:

Indicates the remaining power of the device.

⑤Wireless protocol:

Indicates the Wireless protocol currently in use.



Product function description 2#

⑥AUXIN/OUT:

Input and output interfaces for analog audio.

⑦Mode Key:

TX/RX mode Select switch.


⑧V+/- Key:

Volume up and down, up and down, other buttons for multiplexing functions.

⑨USB-C DC charging port.

⑩: Mic

Microphone for voice calls in TX mode.

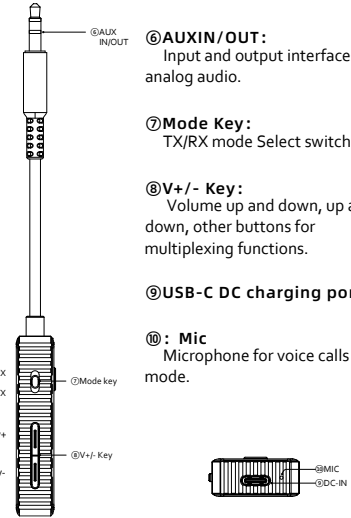

Indicator description

①TX pairing indicator		•Blinking slowly: Waiting for a connection •Quick Blink: Pairing •Steady on: The device is connected
②RX pairing indicator		•Blinking slowly: Waiting for a connection •Quick Blink: Pairing •Steady on: The device is connected
③Power indicator		Each grid represents 25% of the battery level, and the indicator light flashes when the battery level is low.
④Wireless protocol		The Wireless protocol indicator used for the current pairing will light up.

Key function

③Function key	Press and hold the function key for 3 seconds to power on/off. In RX mode: In a call state, click: Answer/end the call. In music state, click: Play/pause. In TX mode: Press and hold to wake up the voice assistant. (This parameter needs to be set in the mobile phone).
⑦Mode key	RX: Used as the receiving end, it can be paired with mobile phones, tablets, computers and other devices to transmit audio to audio devices with 3.5mm AUX IN interface through AUX interface. TX: Used as a transmitter, it can transmit audio from aircraft, treadmill, game console, radio and other devices that do not have Wireless transmission function to Wireless receiving devices such as paired Wireless headphones and speakers through this device.
⑧V+/- Key	In RX mode: Click volume adjustment and long press to switch music. In TX mode: Click to adjust volume, long press to continuously adjust volume.

Other function

⑥AUX IN/OUT	AUX audio input/output jack.
⑩MIC	Microphone used for calls in RX mode.
⑨DC IN	DC5V charging port.
Reset	Press and hold the volume up and volume down buttons simultaneously for 5 seconds. If all the lights turn on at the same time, it indicates that the reset is successful.

PDF  
Adobe

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure statement

The device has been evaluatec to meel general RF exposure requirement. The device can be used in portable exposure condition without restriction.