



Shenzhen CTL Testing Technology Co., Ltd.

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.895	/	Pass
		2441	DH5	1	0.906	/	Pass
		2480	DH5	1	0.916	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.183	/	Pass
		2441	2DH5	1	1.191	/	Pass
		2480	2DH5	1	1.197	/	Pass
8DPSK	SISO	2402	3DH5	1	1.171	/	Pass
		2441	3DH5	1	1.182	/	Pass
		2480	3DH5	1	1.186	/	Pass


1.1.2 Test Graph

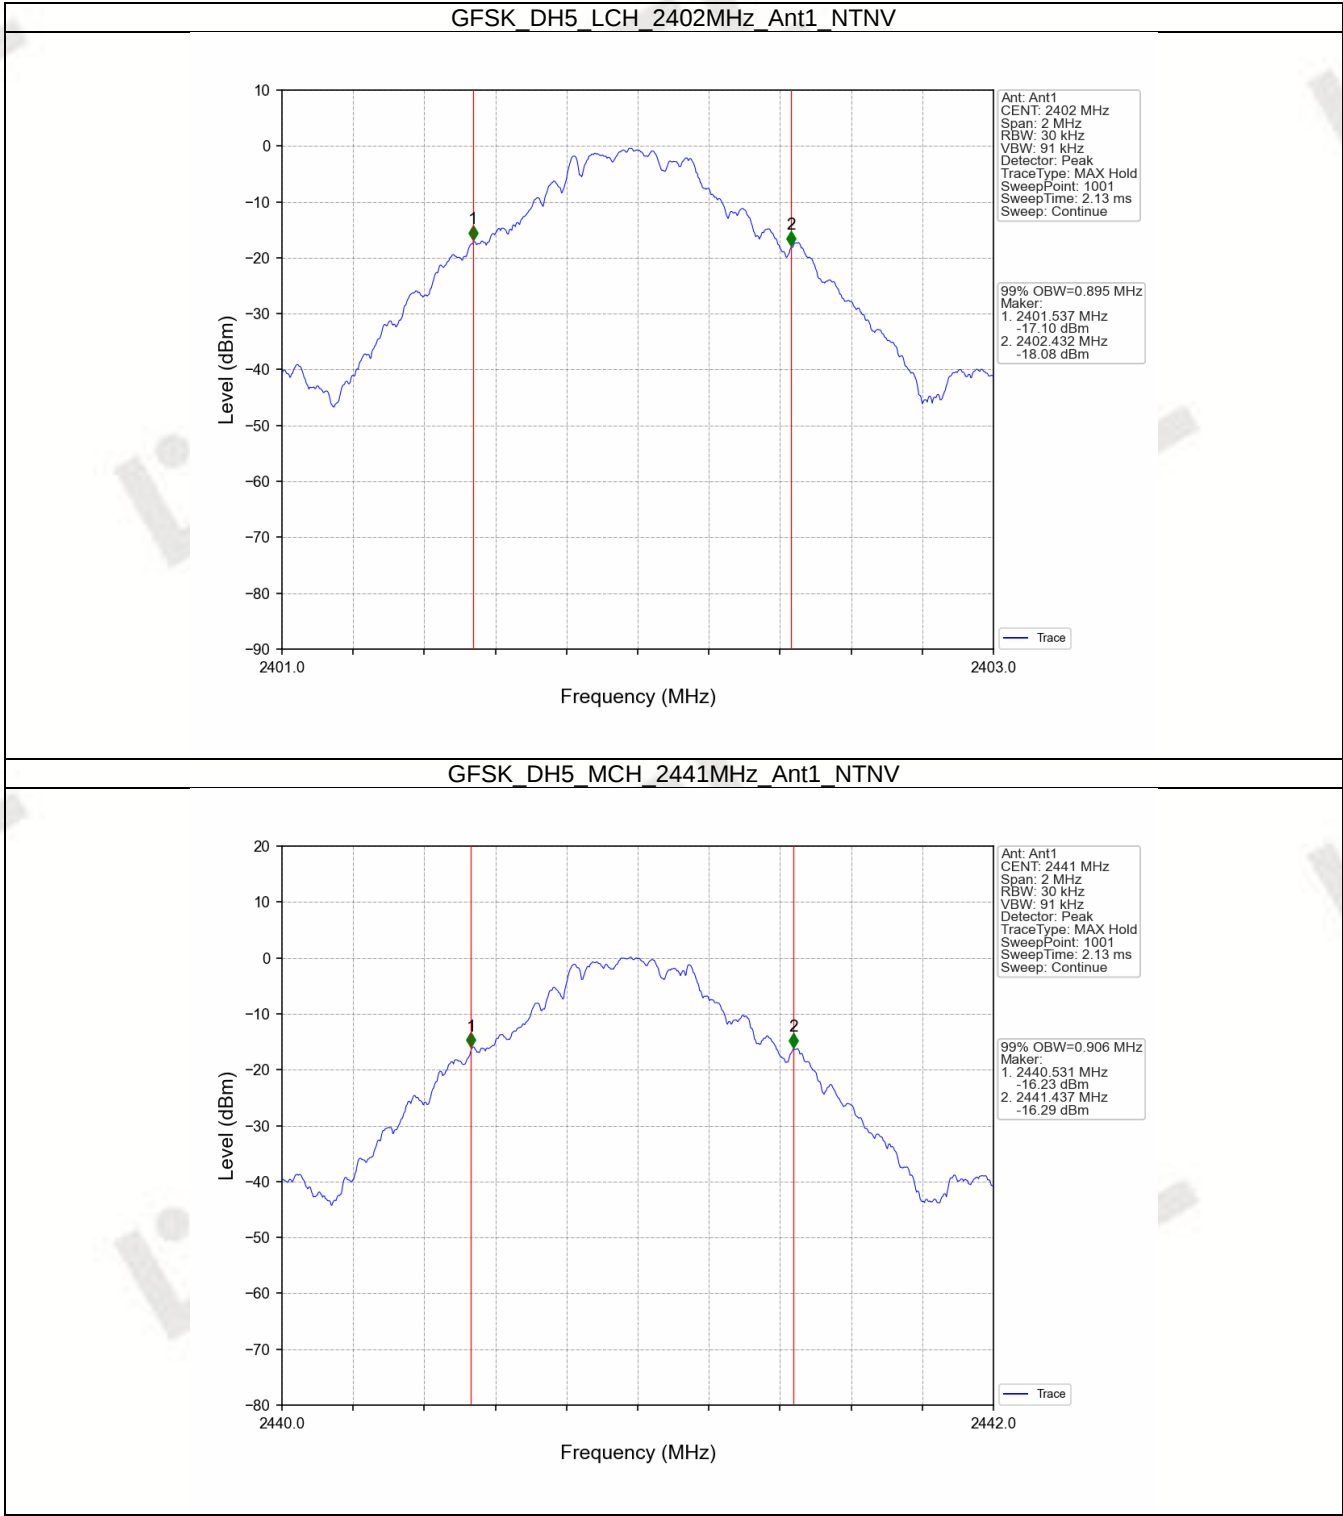


GFSK DH5 HCH 2480MHz Ant1 NTN

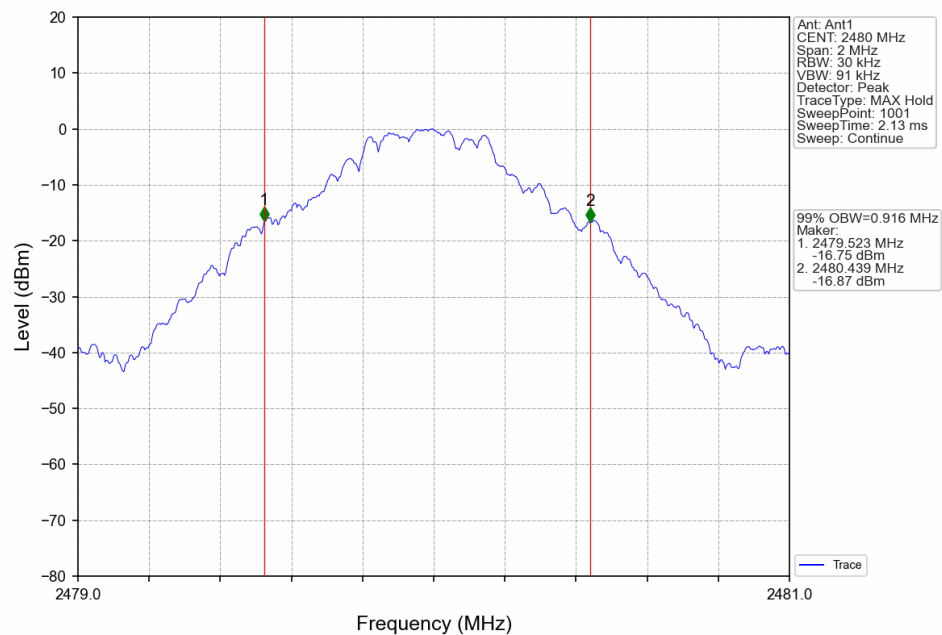


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

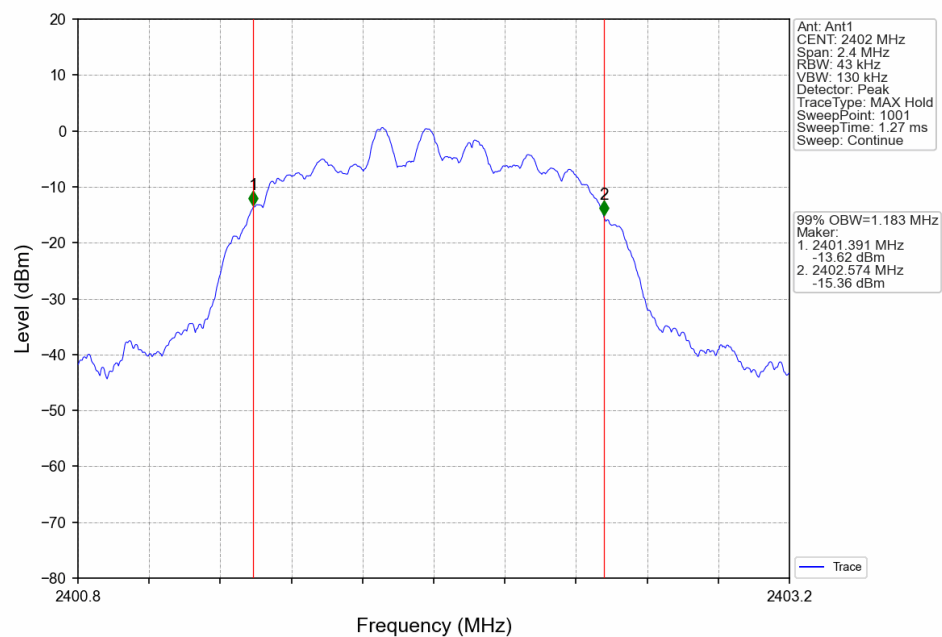


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

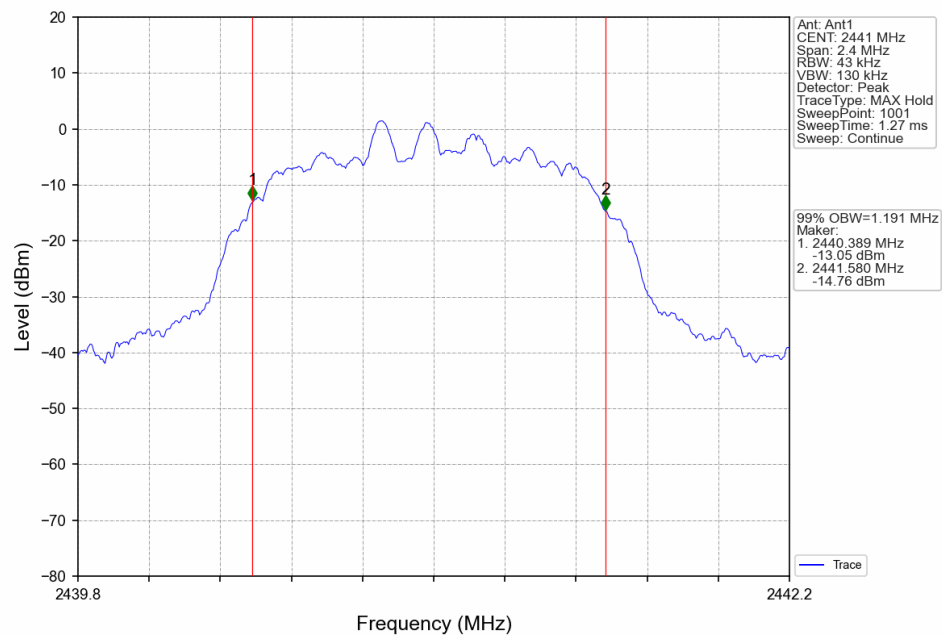


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

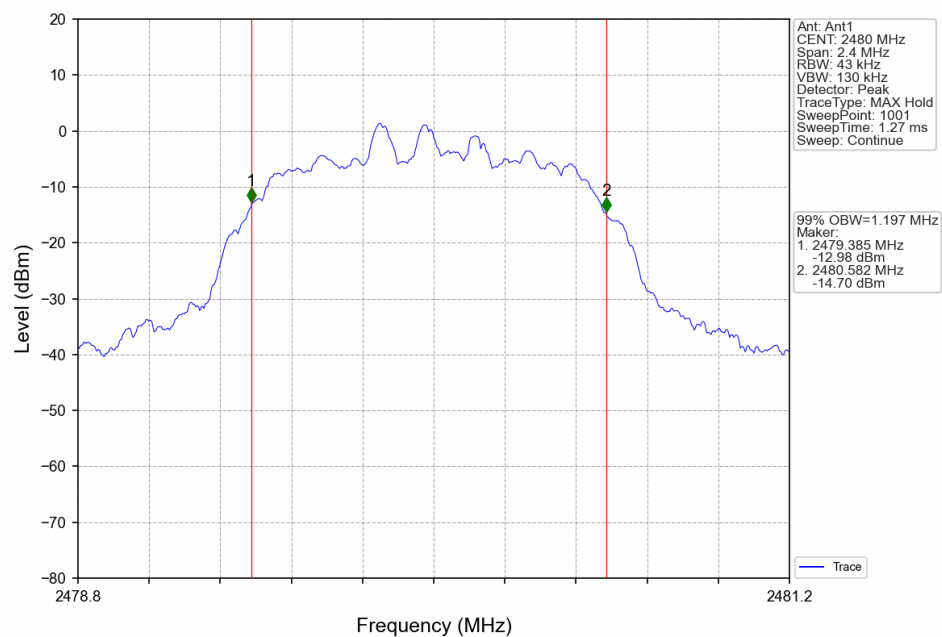


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

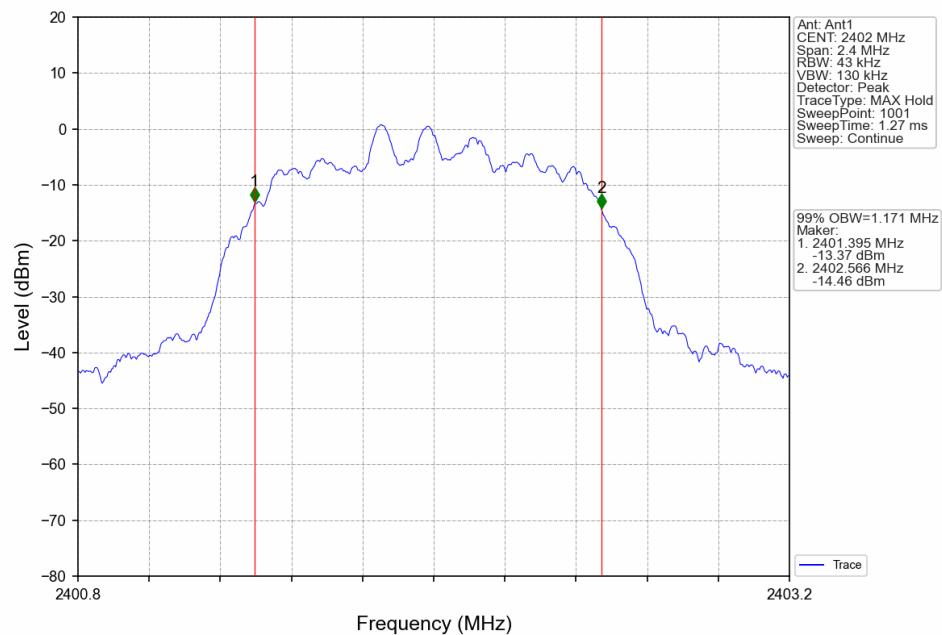

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

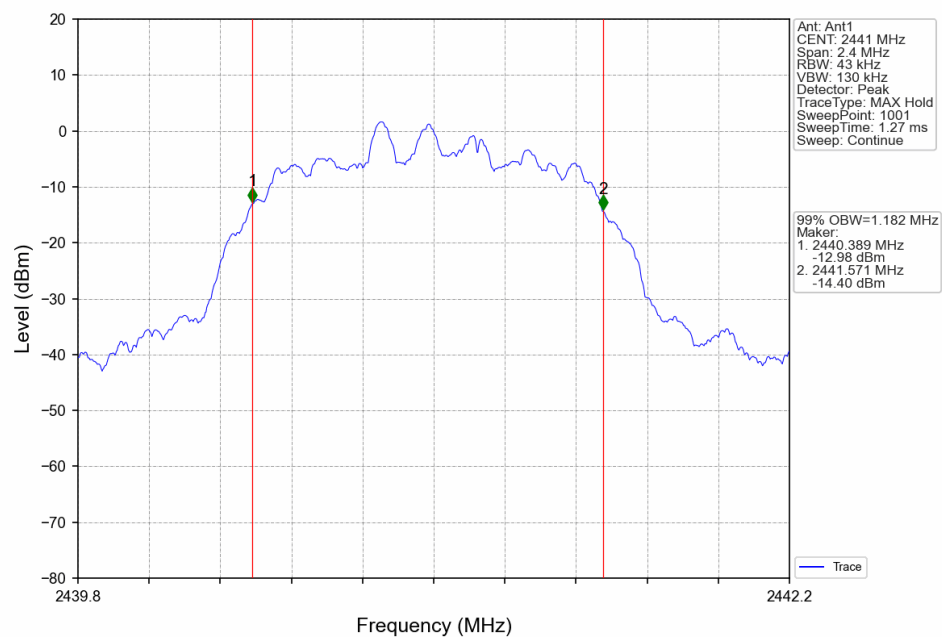

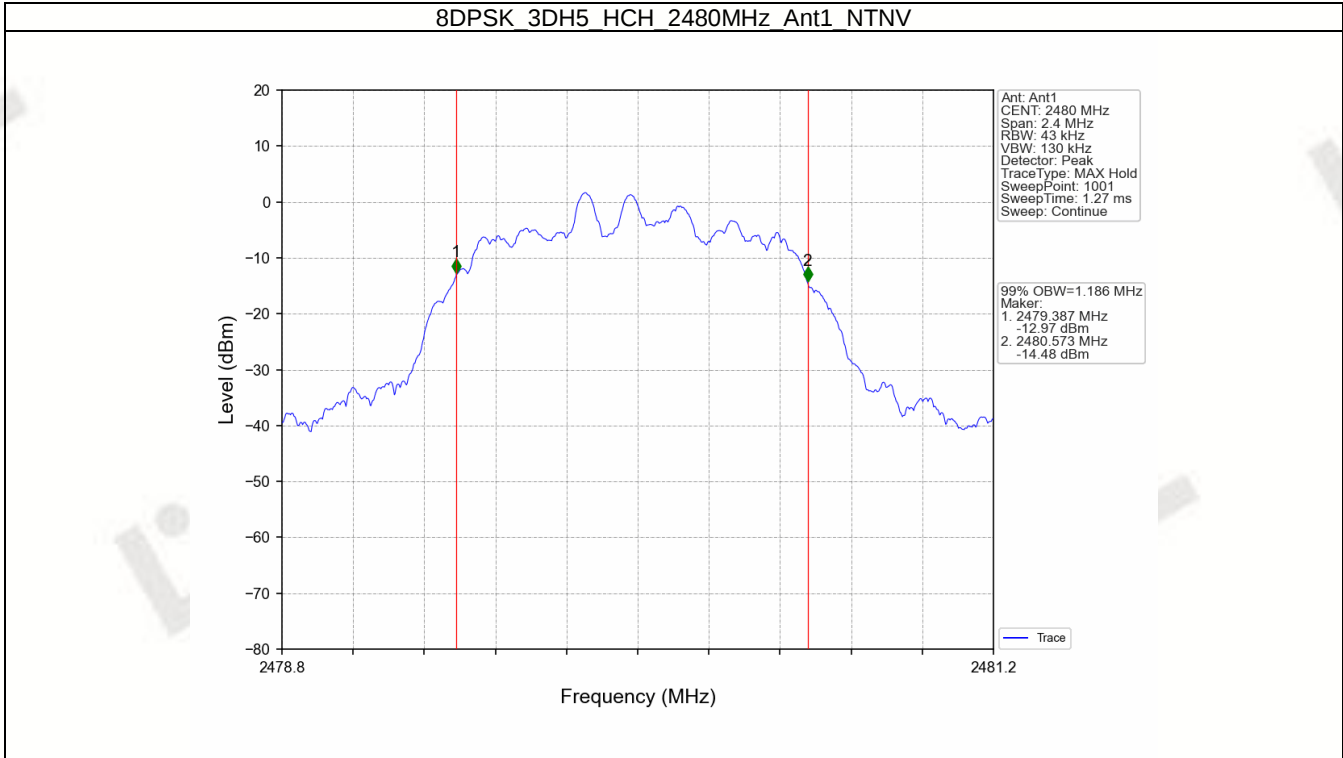


1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.022	/	Pass
		2441	DH5	1	1.036	/	Pass
		2480	DH5	1	1.039	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.329	/	Pass
		2441	2DH5	1	1.332	/	Pass
		2480	2DH5	1	1.336	/	Pass
8DPSK	SISO	2402	3DH5	1	1.311	/	Pass
		2441	3DH5	1	1.316	/	Pass
		2480	3DH5	1	1.330	/	Pass


1.2.2 Test Graph

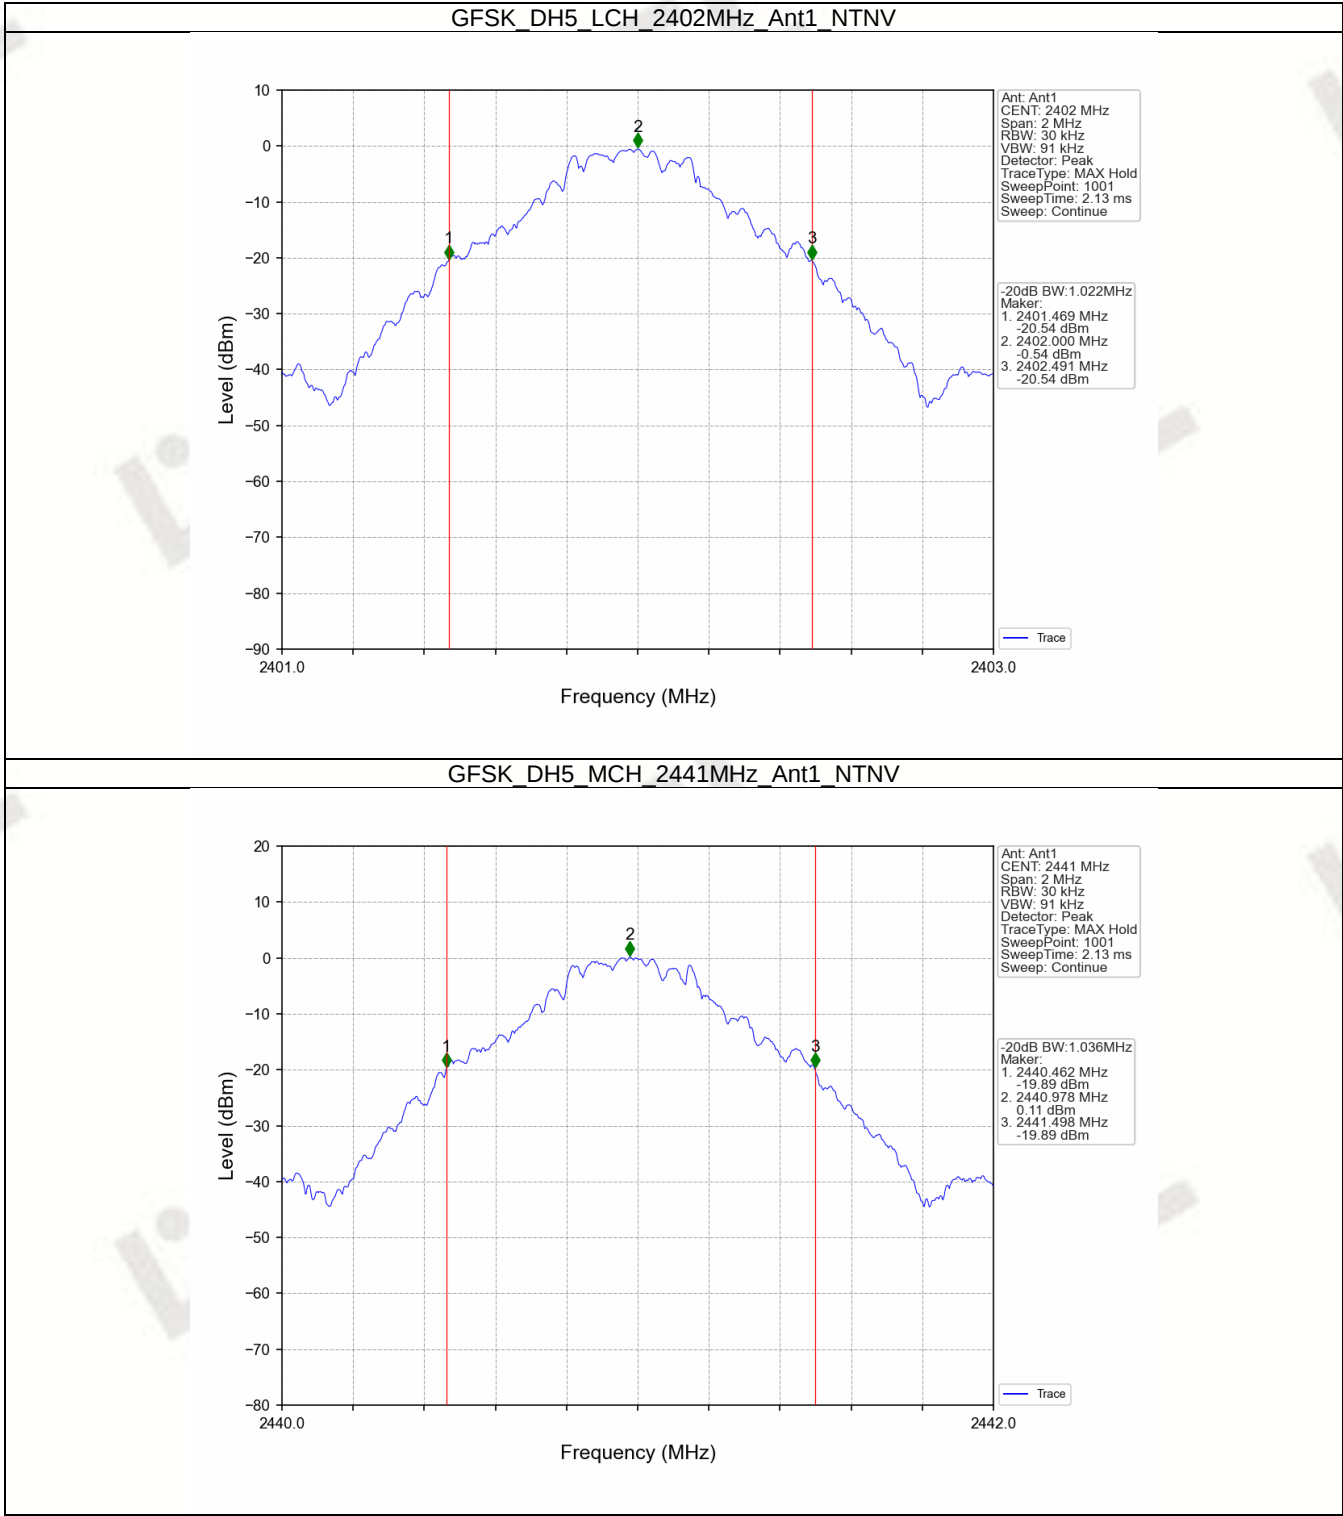


GFSK DH5 HCH 2480MHz Ant1 NTN

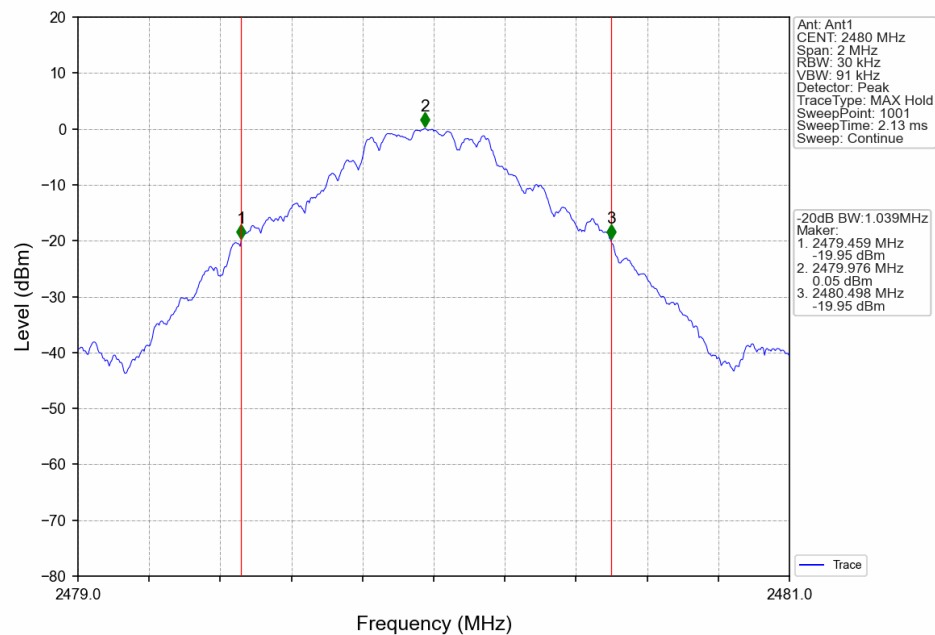


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

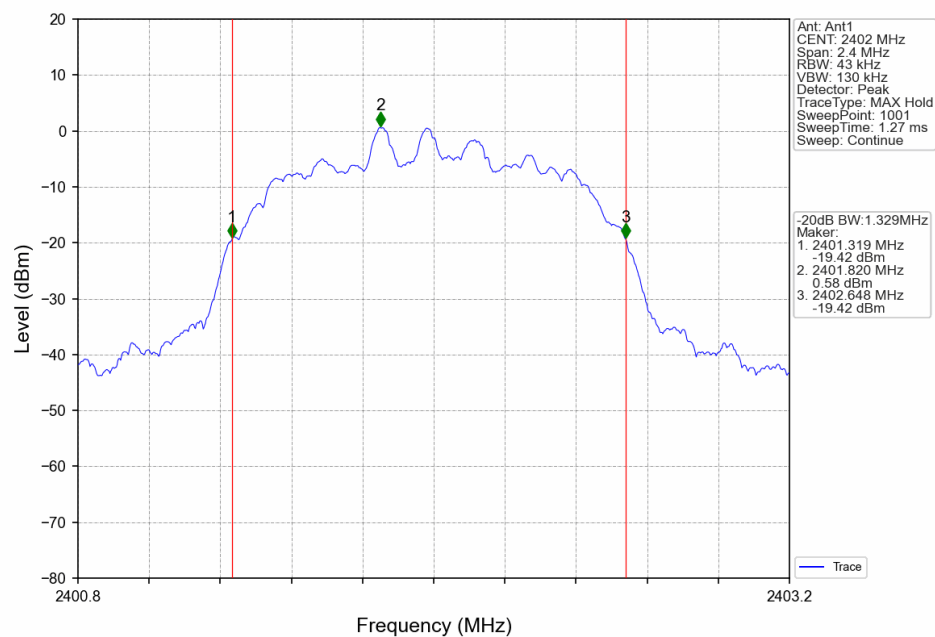


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

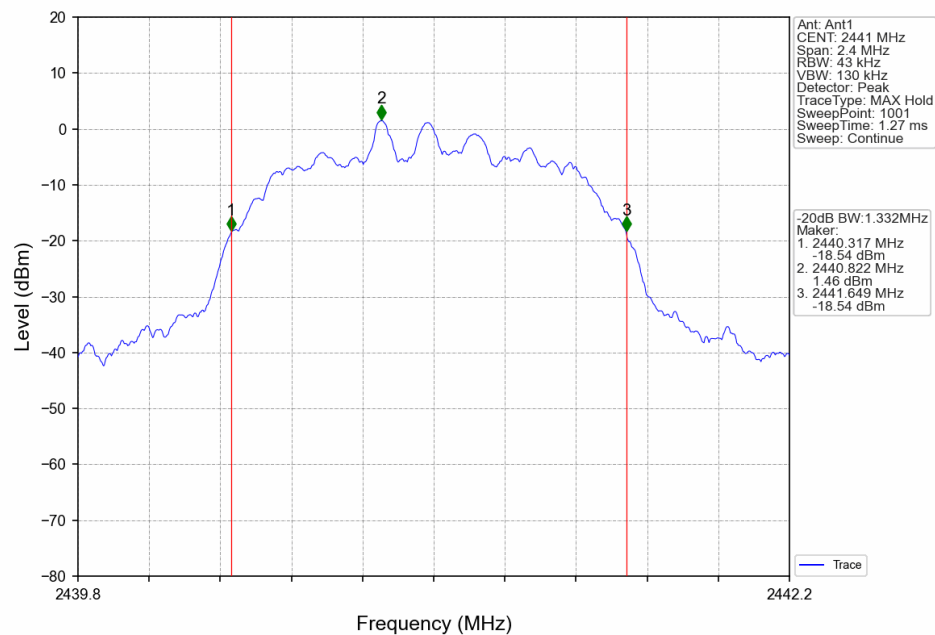


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

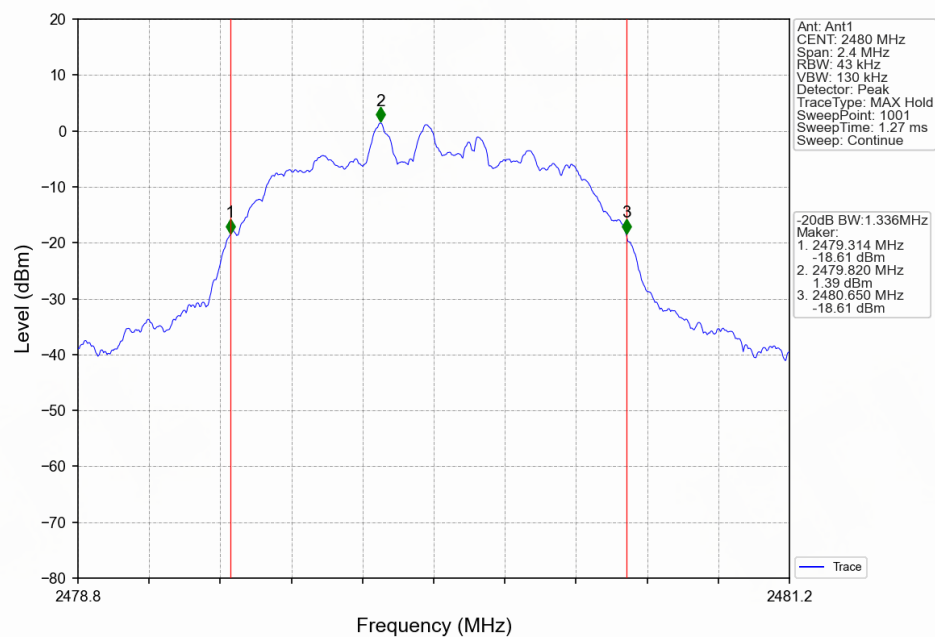


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

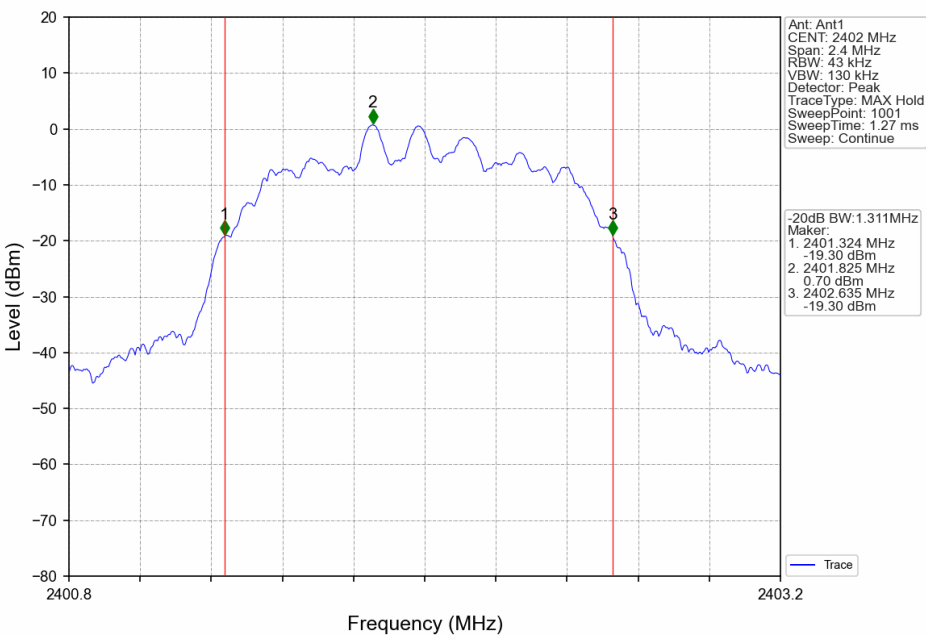

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

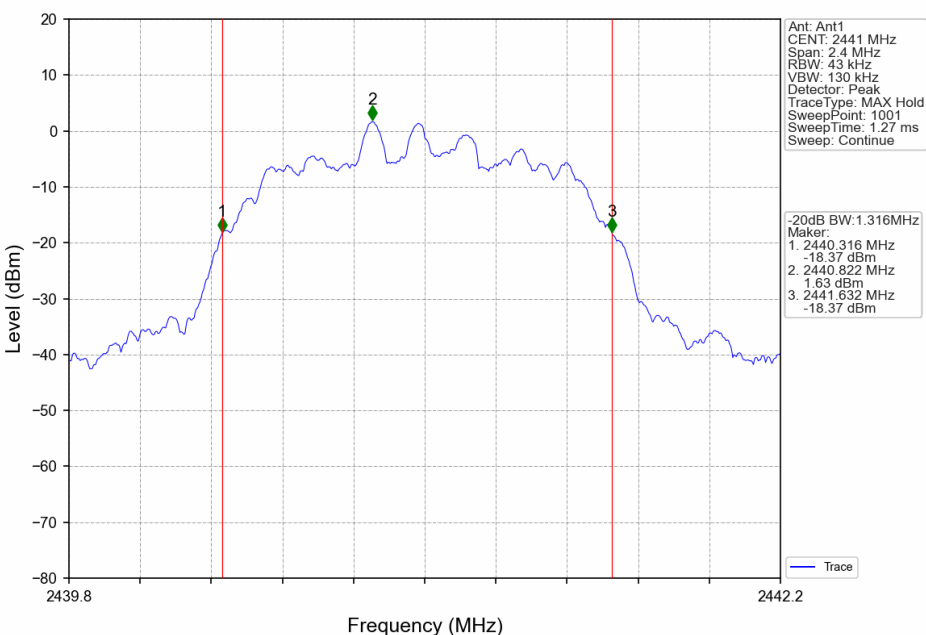

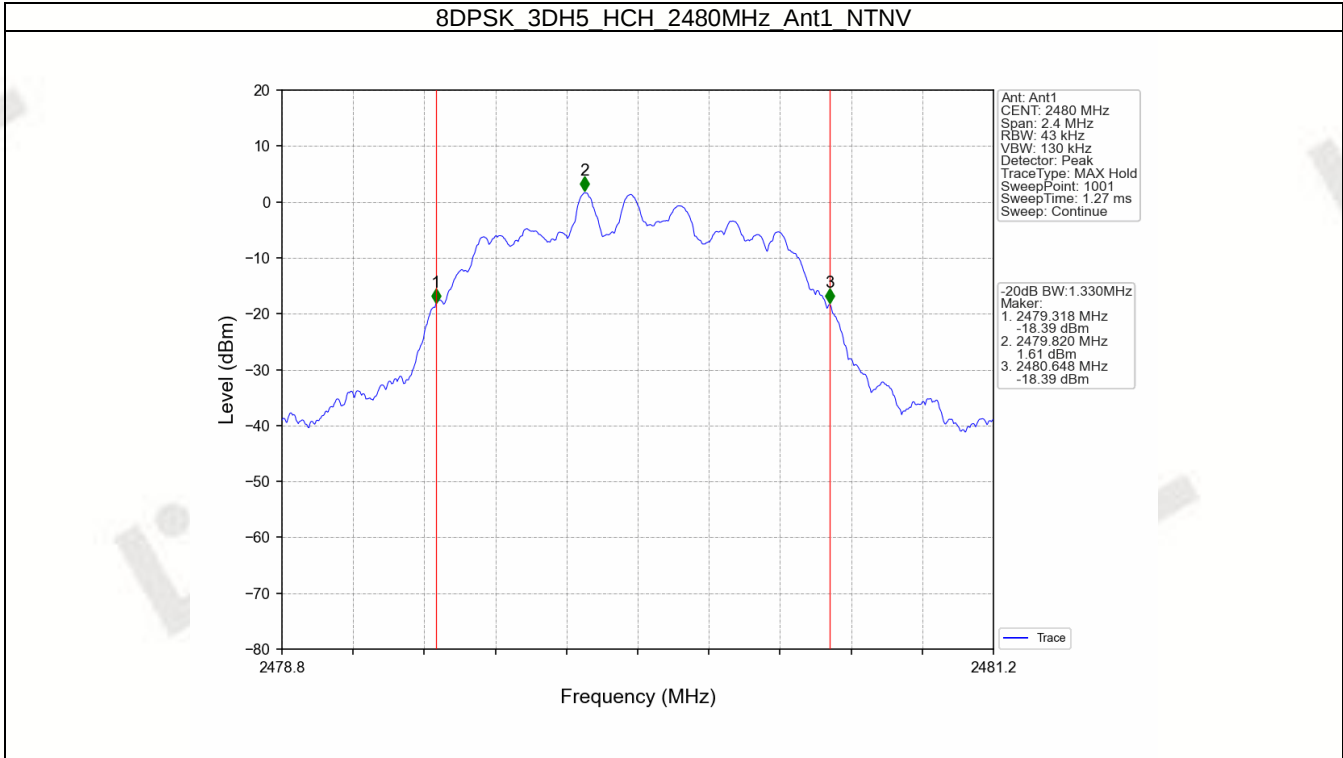

2. Maximum Conducted Output Power


2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	2.05	≤ 20.97	Pass
		2441	DH5	2.79	≤ 20.97	Pass
		2480	DH5	2.73	≤ 20.97	Pass
PI/4DQPSK	SISO	2402	2DH5	2.83	≤ 20.97	Pass
		2441	2DH5	3.57	≤ 20.97	Pass
		2480	2DH5	3.49	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	2.92	≤ 20.97	Pass
		2441	3DH5	3.72	≤ 20.97	Pass
		2480	3DH5	3.69	≤ 20.97	Pass

Note1: Antenna Gain: Ant1: -0.58dBi;


2.1.2 Test Graph

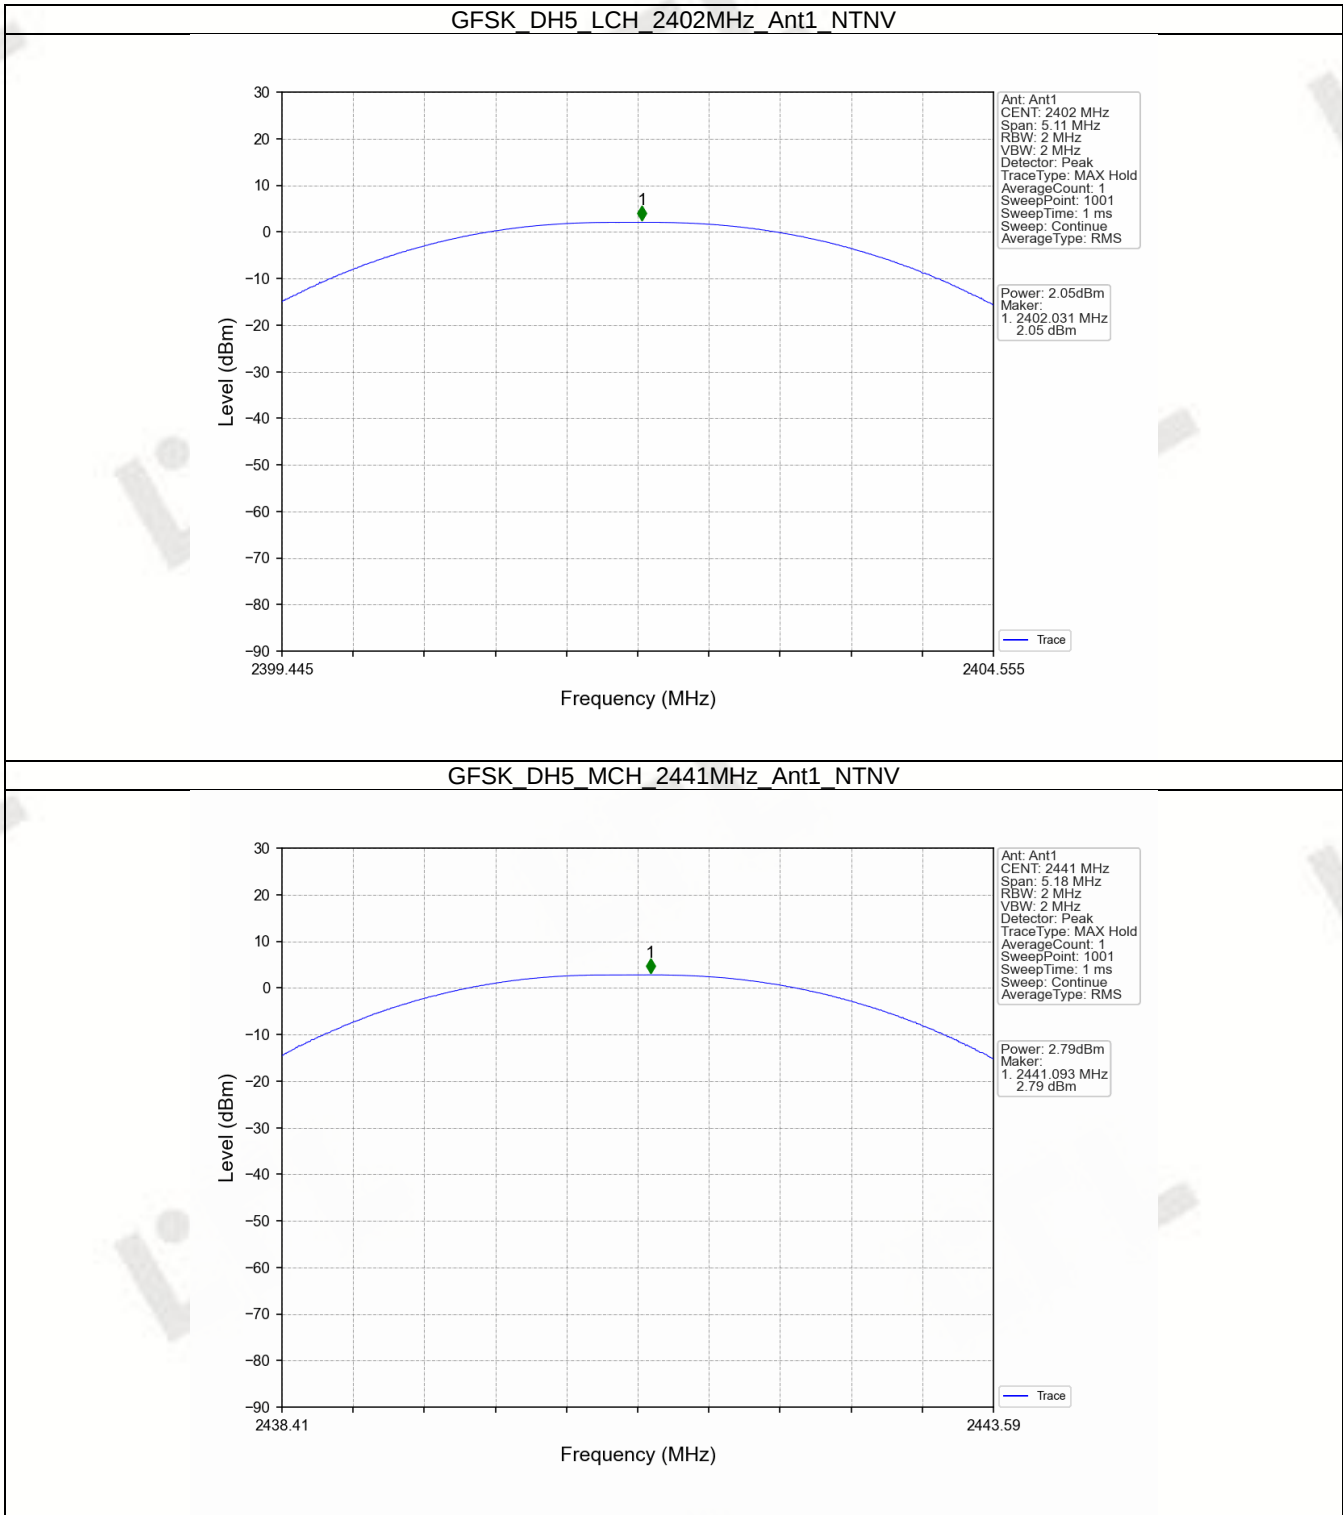


GFSK DH5 HCH 2480MHz Ant1 NTN

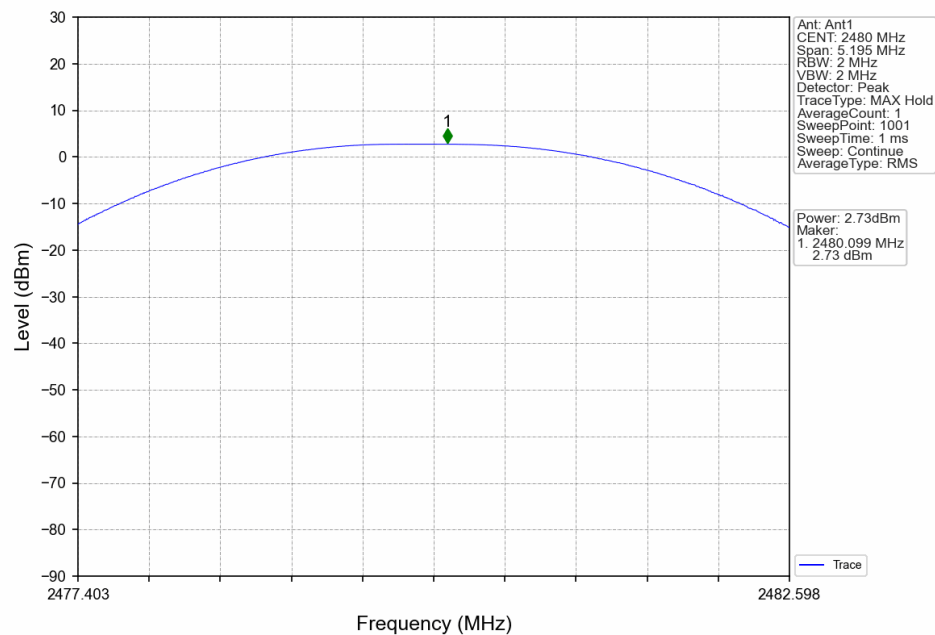


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

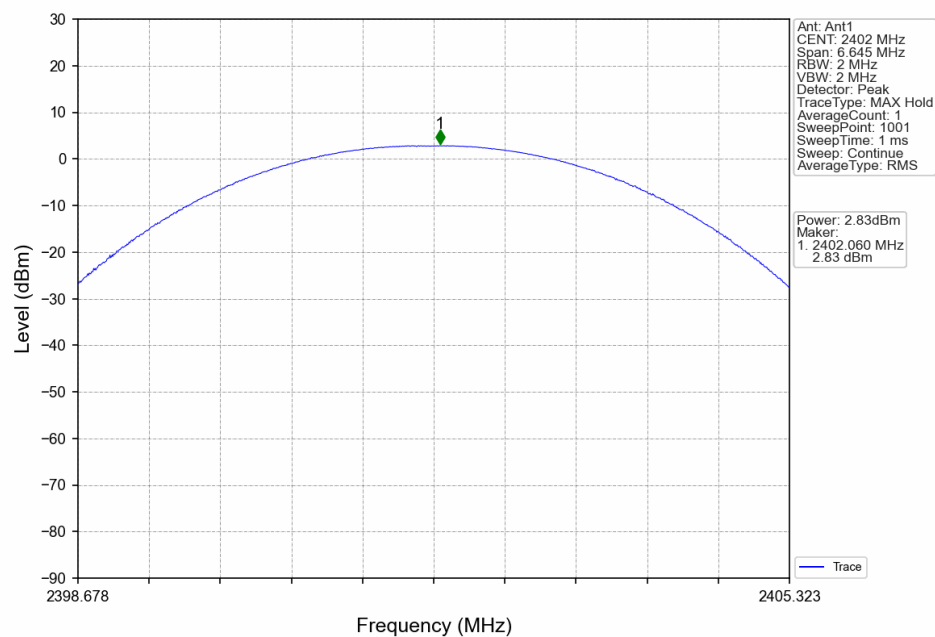


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

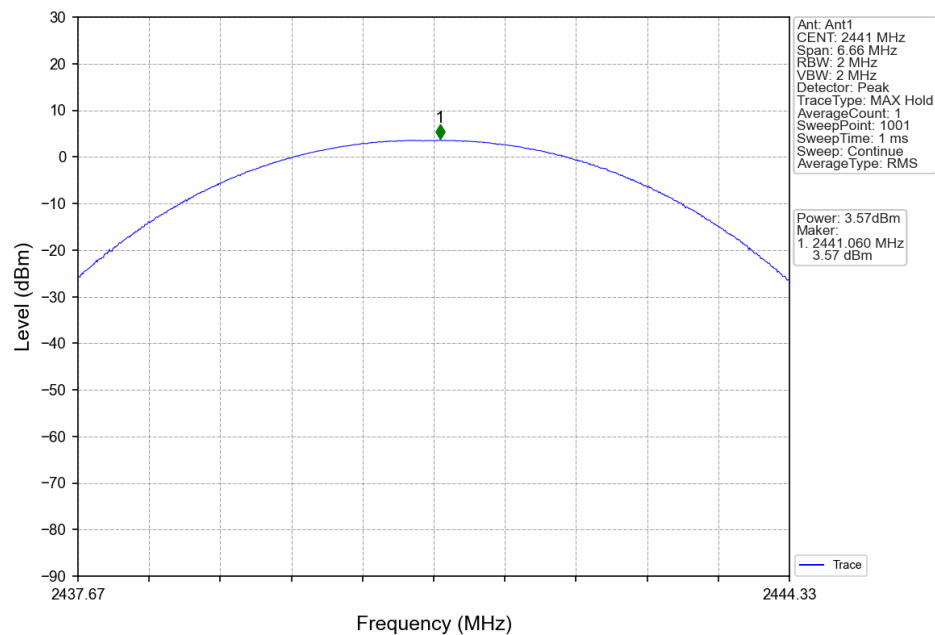


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

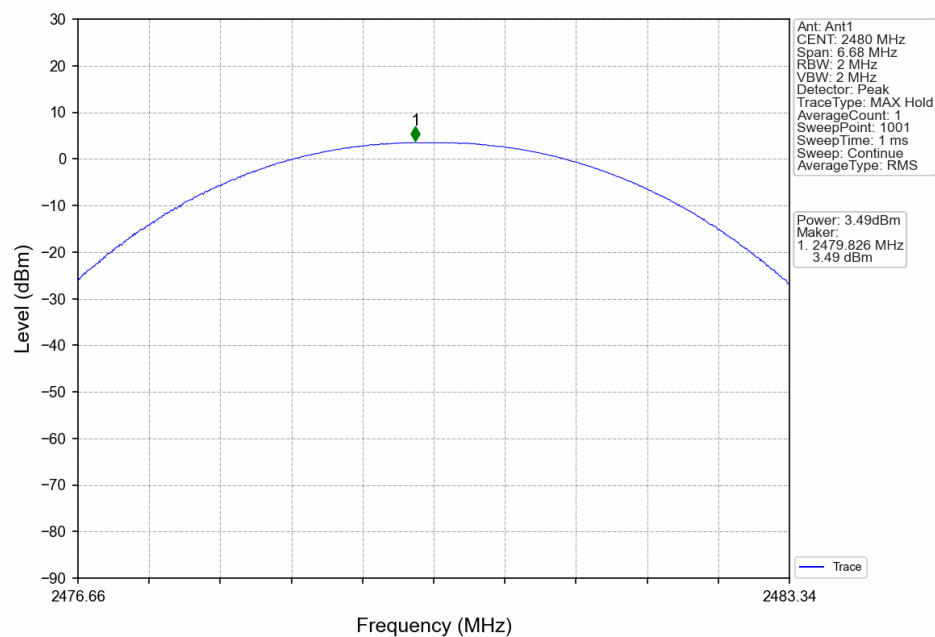


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

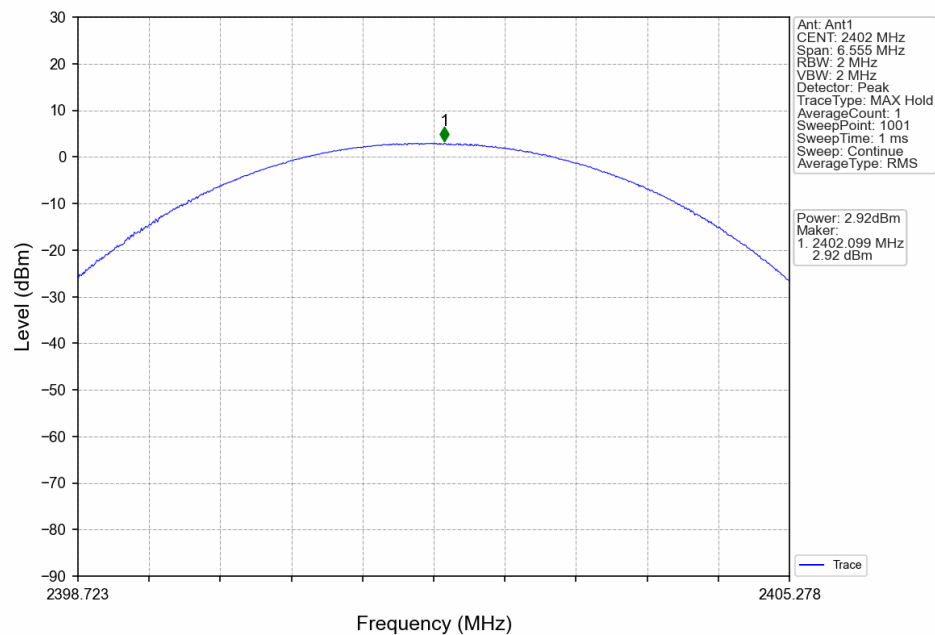

8DPSK 3DH5 MCH 2441MHz Ant1 NTN

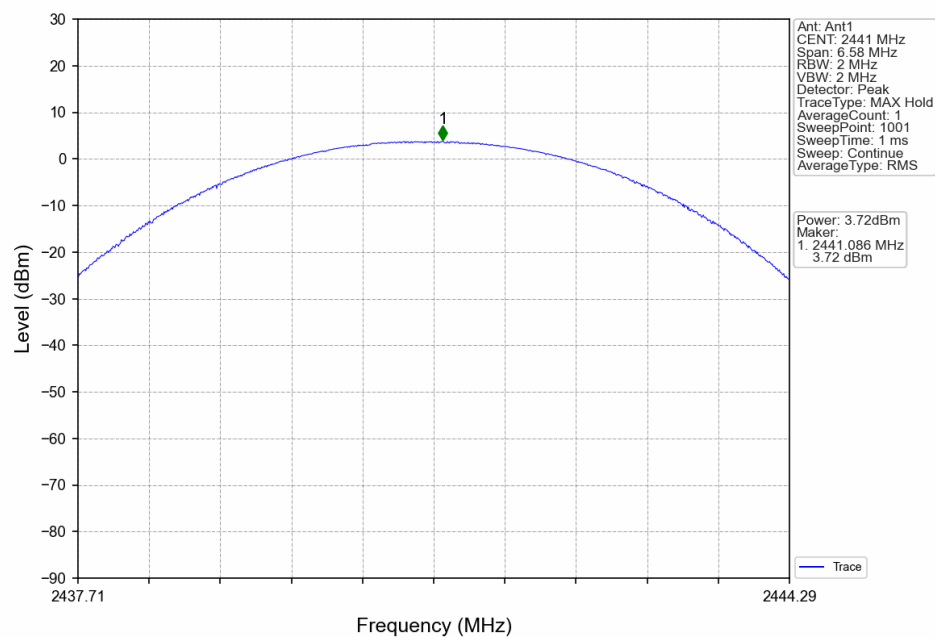

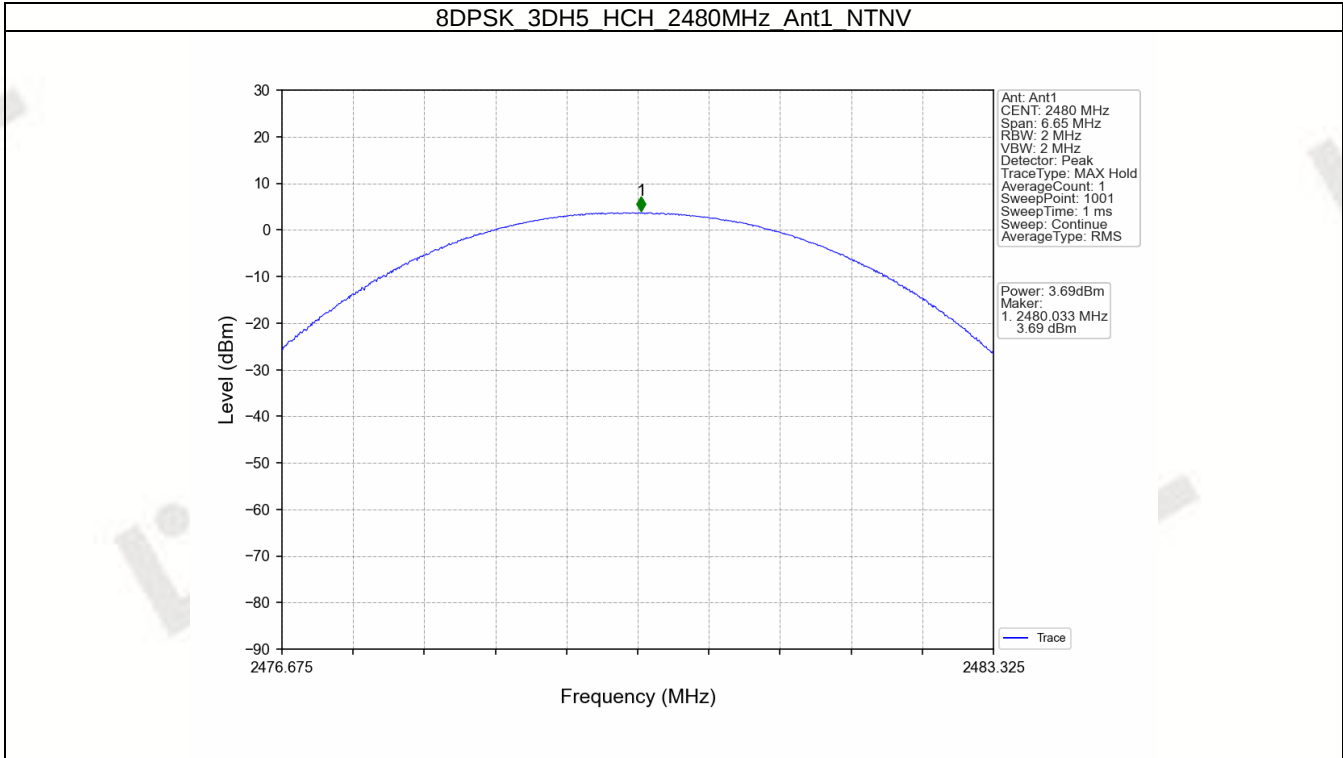


3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.039	≥ 0.693	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.336	≥ 0.891	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.330	≥ 0.887	Pass

3.1.2 Test Graph

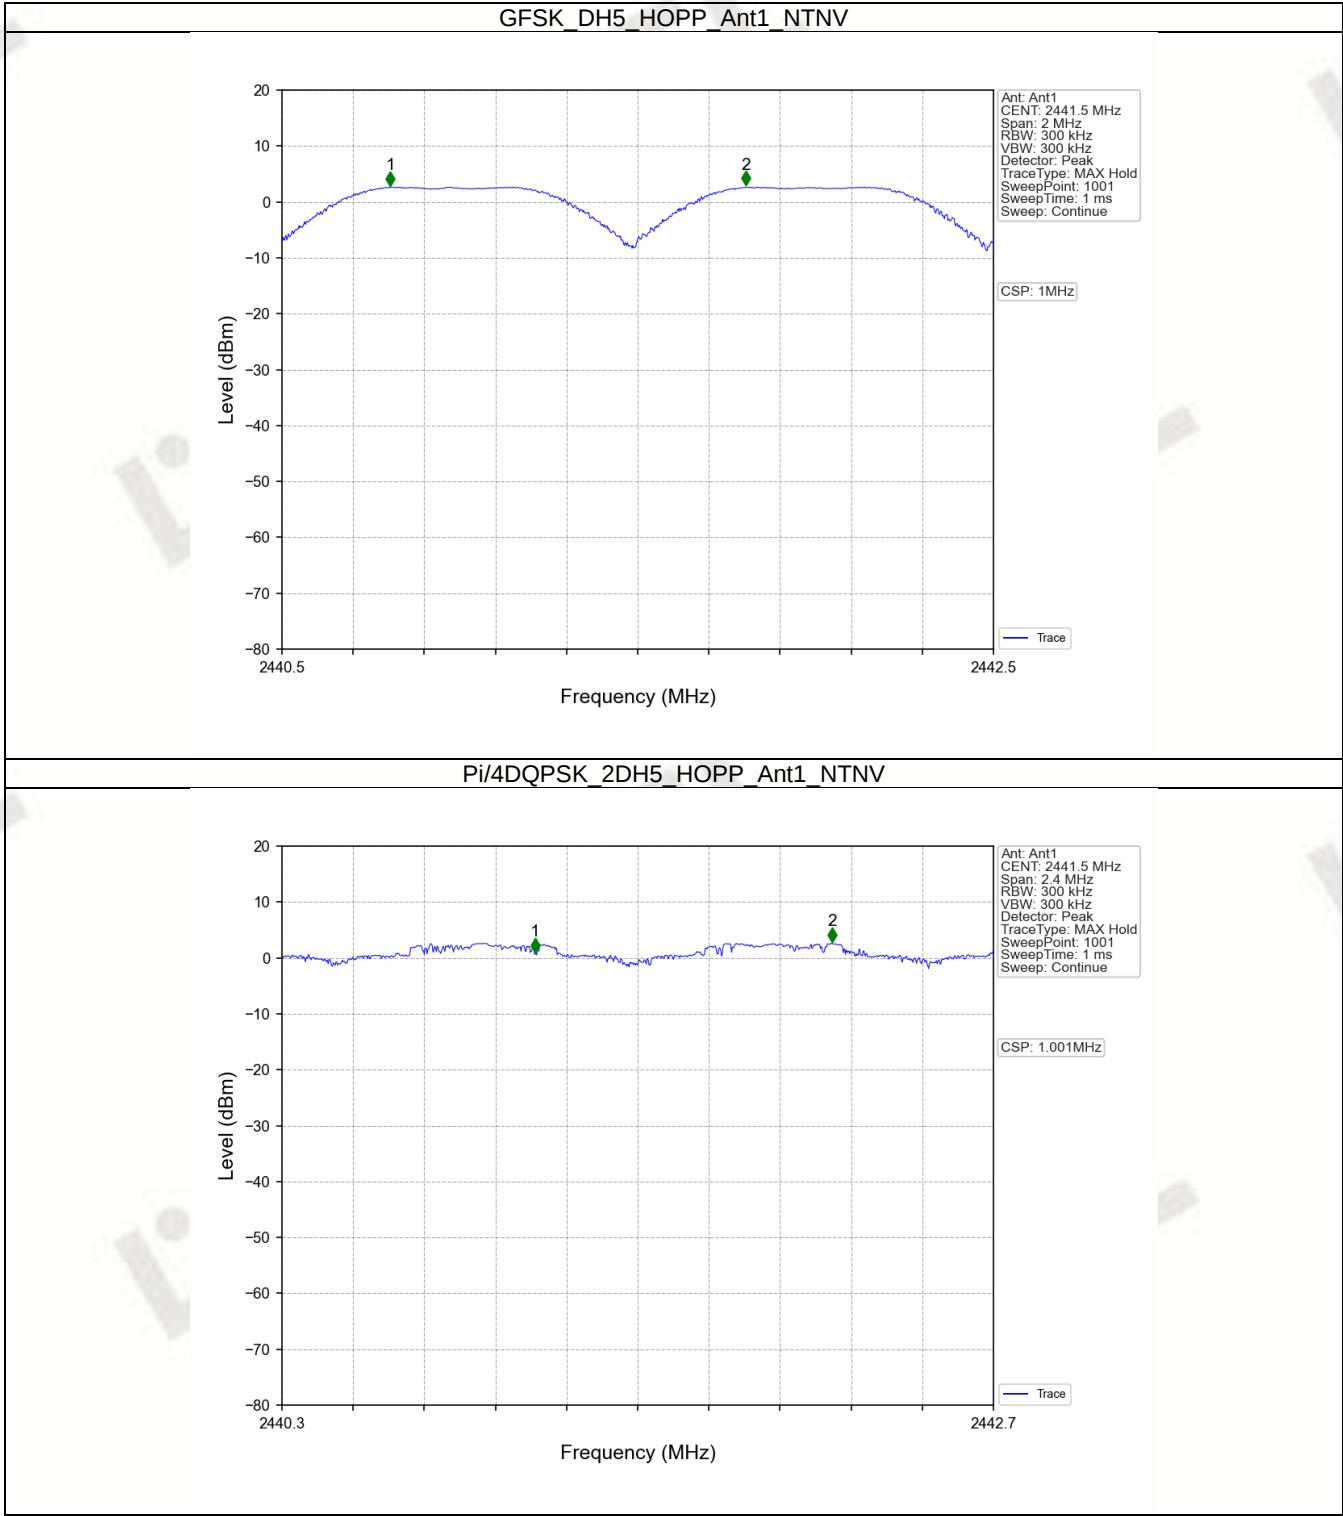

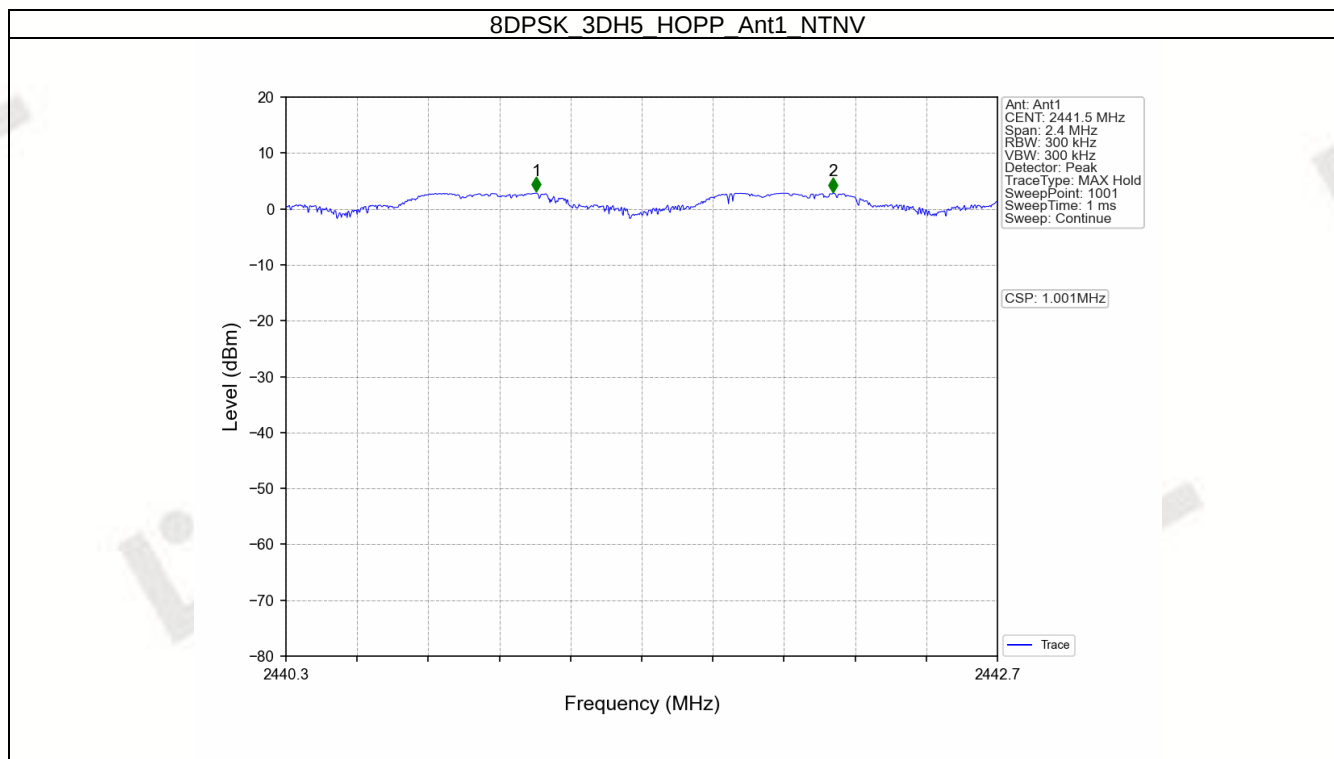


4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

4.1.2 Test Graph

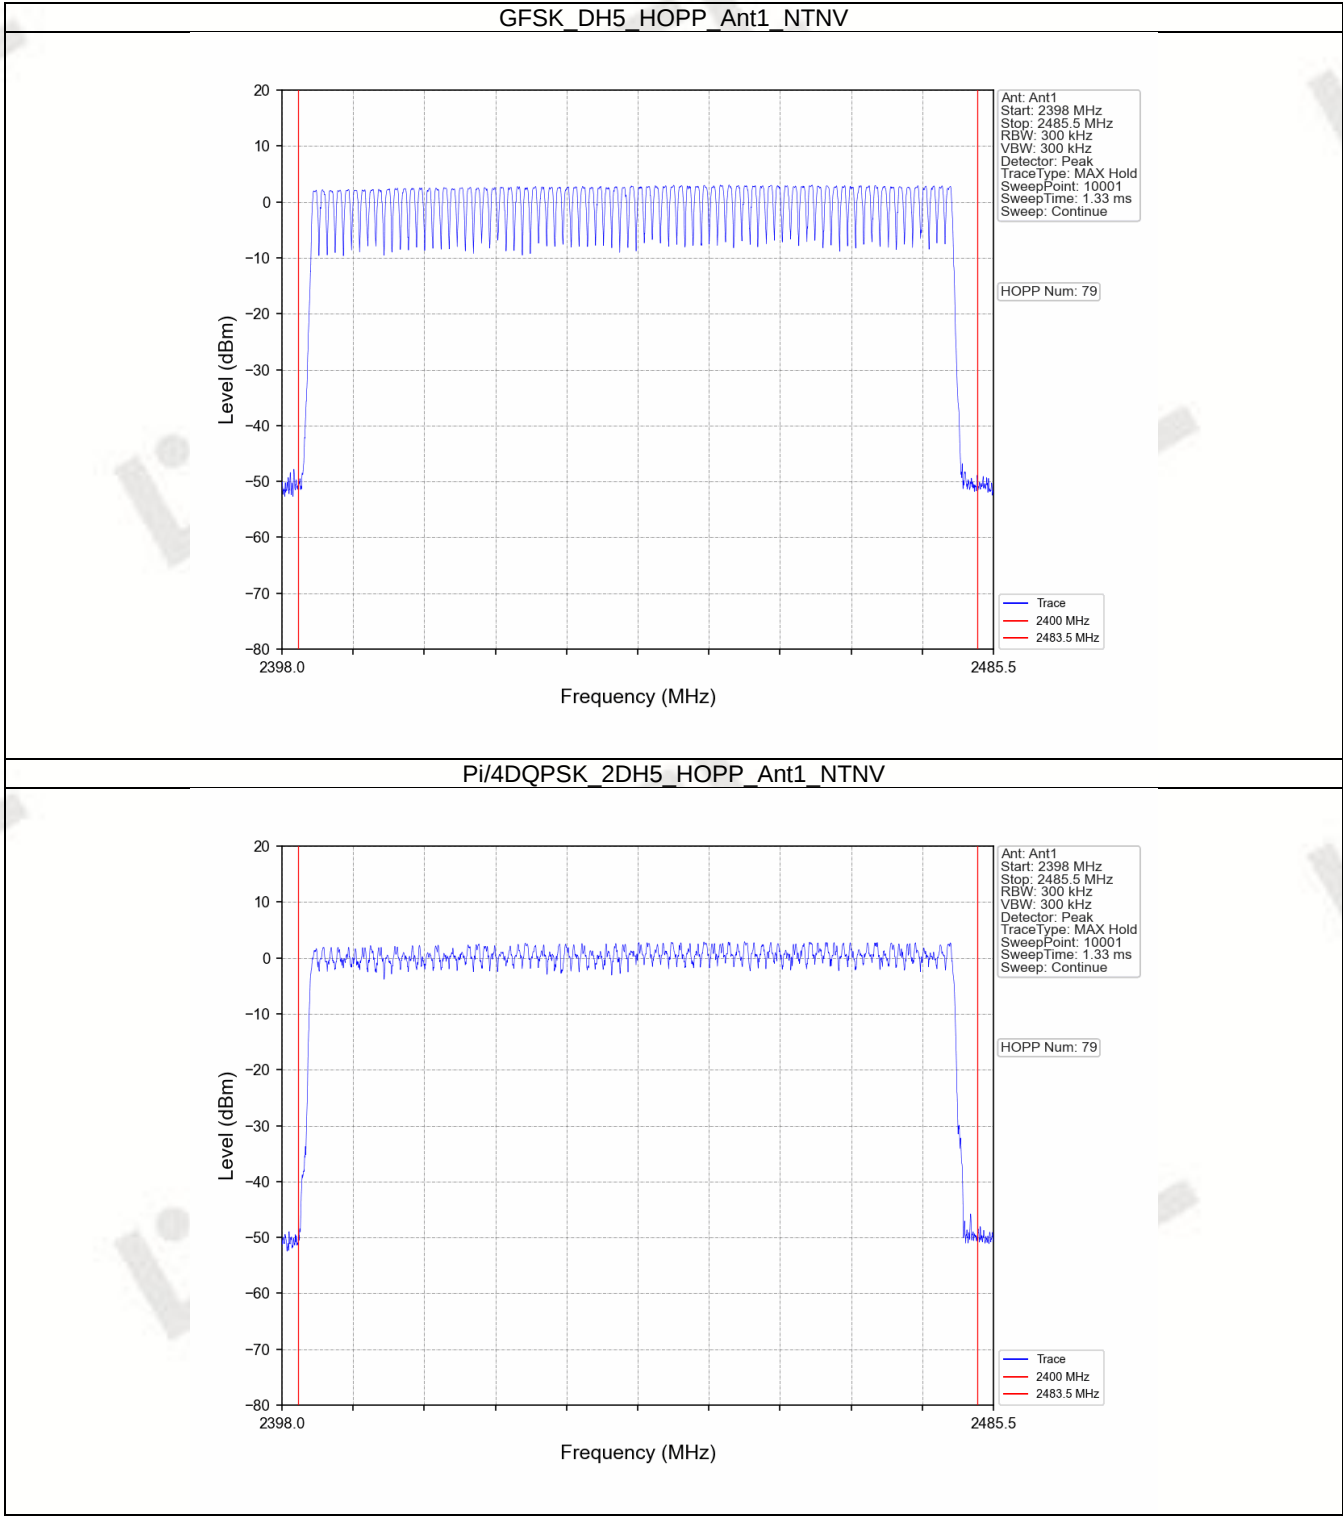

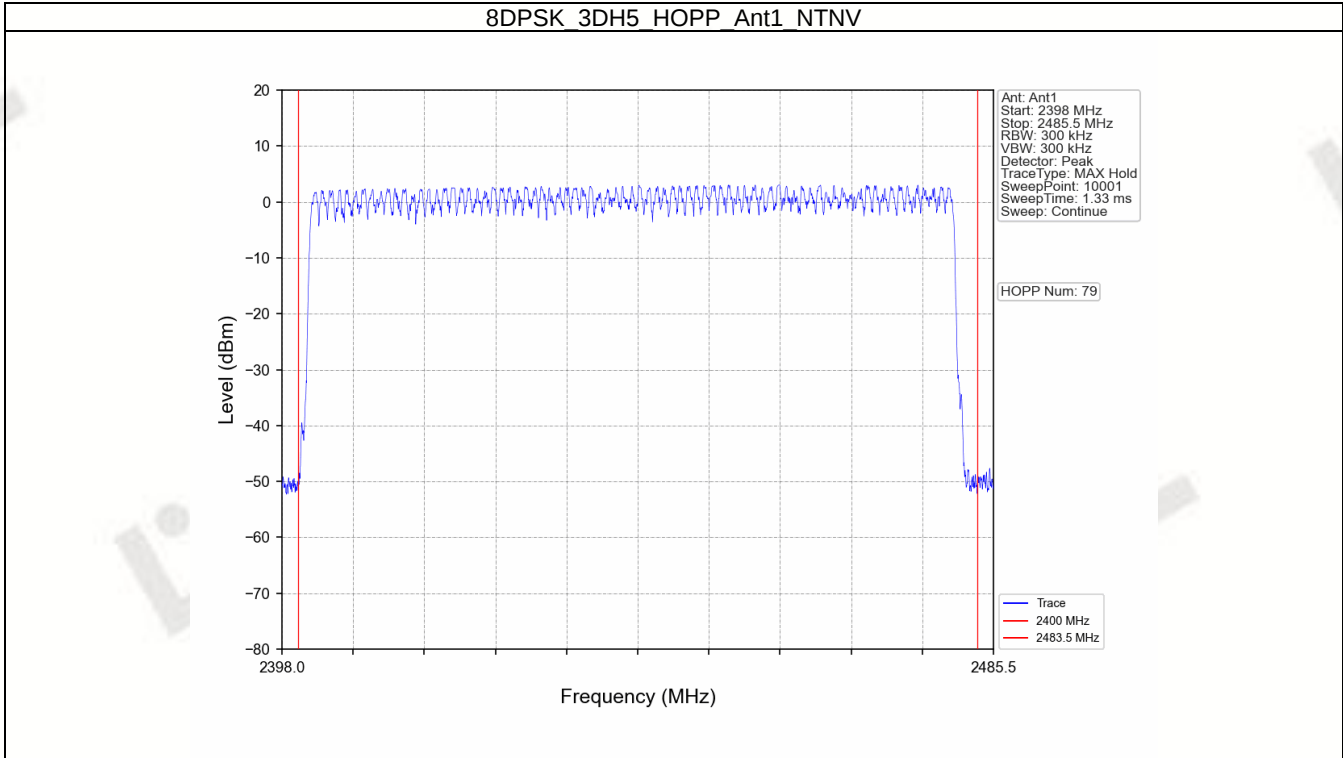


5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	Tx Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.388	31.600	319	123.772	<=400	Pass
			DH3	1.650	31.600	163	268.950	<=400	Pass
			DH5	2.898	31.600	105	304.290	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.398	31.600	317	126.166	<=400	Pass
			2DH3	1.650	31.600	166	273.900	<=400	Pass
			2DH5	2.904	31.600	112	325.248	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.390	31.600	318	124.020	<=400	Pass
			3DH3	1.642	31.600	165	270.930	<=400	Pass
			3DH5	2.892	31.600	91	263.172	<=400	Pass


5.1.2 Test Graph

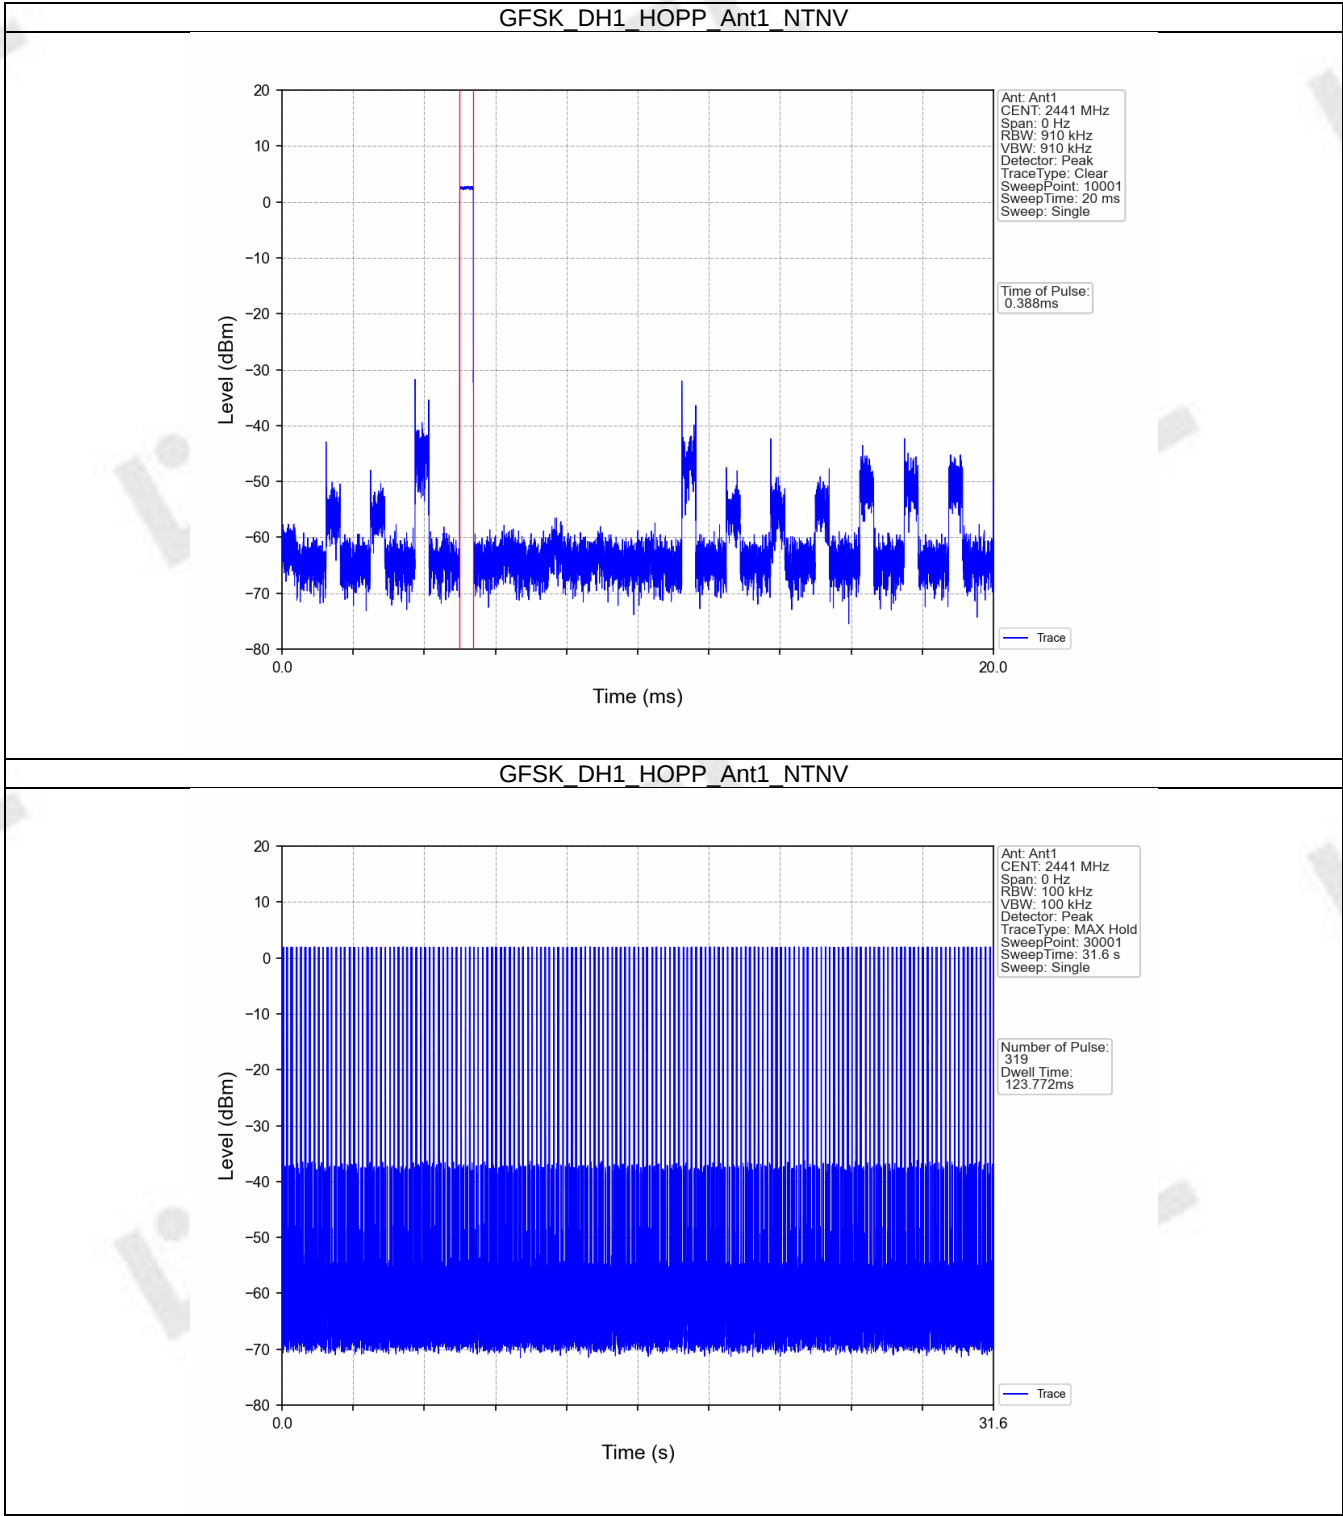


GFSK DH3 HOPP Ant1 NTN

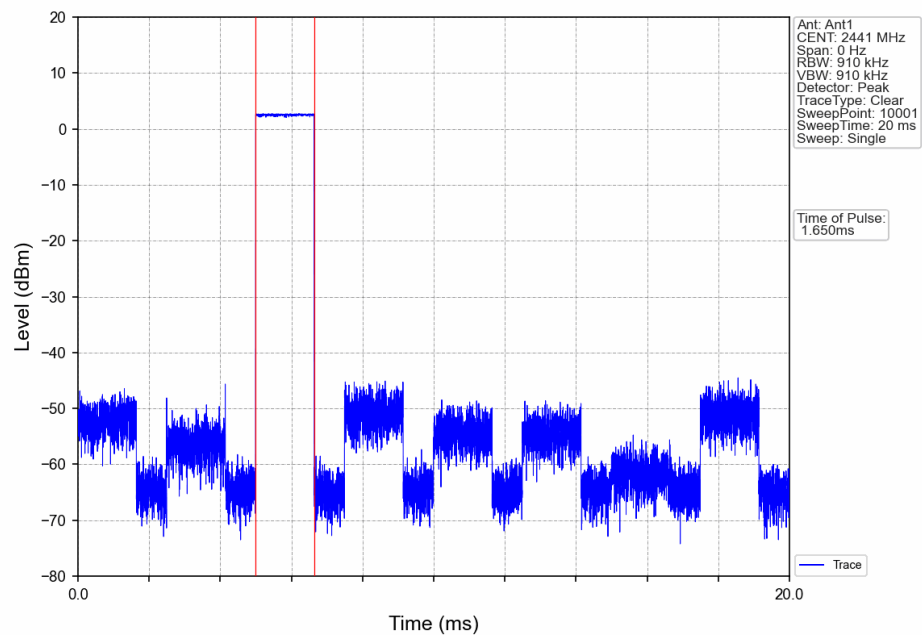


GFSK DH3 HOPP Ant1 NTN

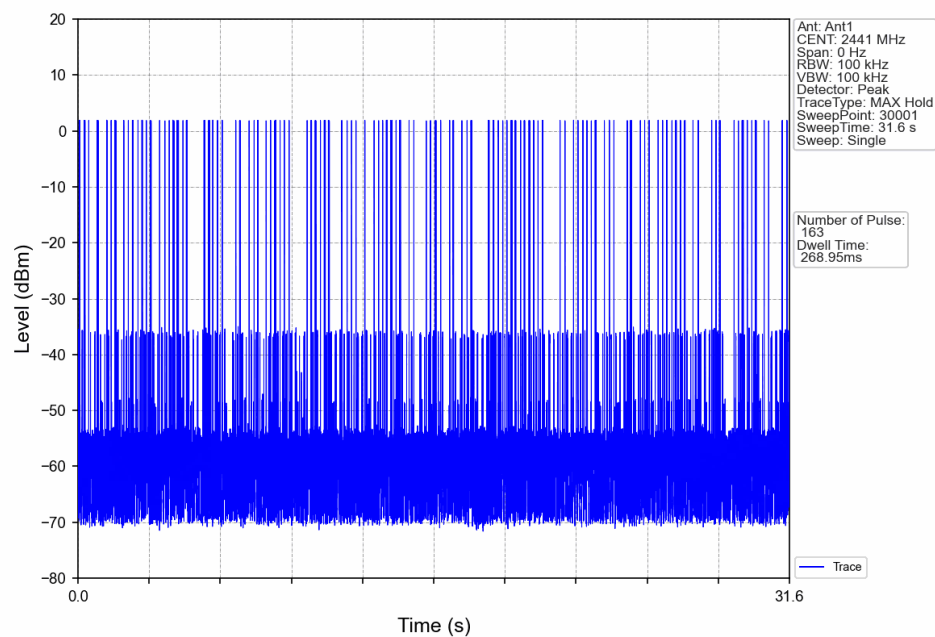


GFSK DH5 HOPP Ant1 NTN

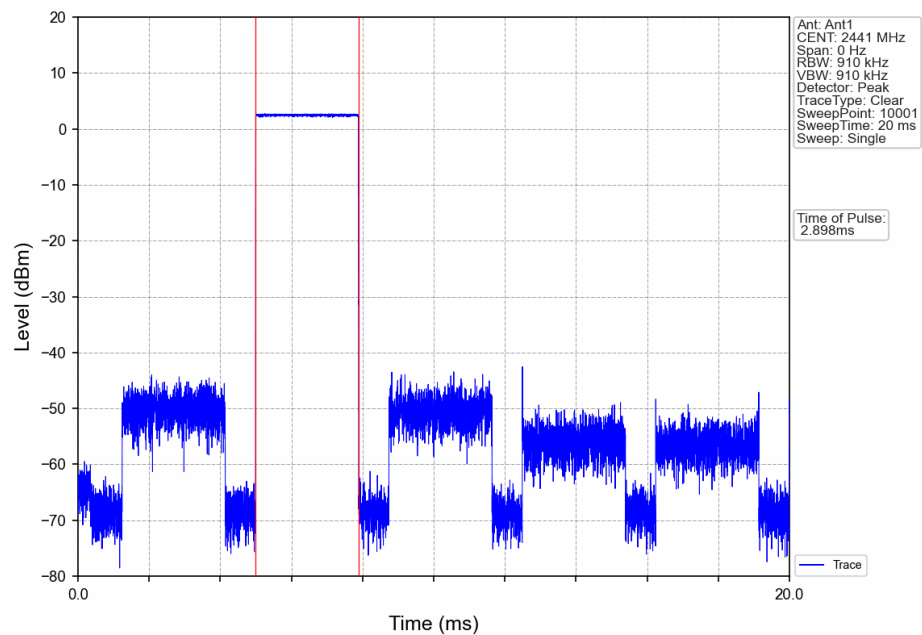


GFSK DH5 HOPP Ant1 NTN

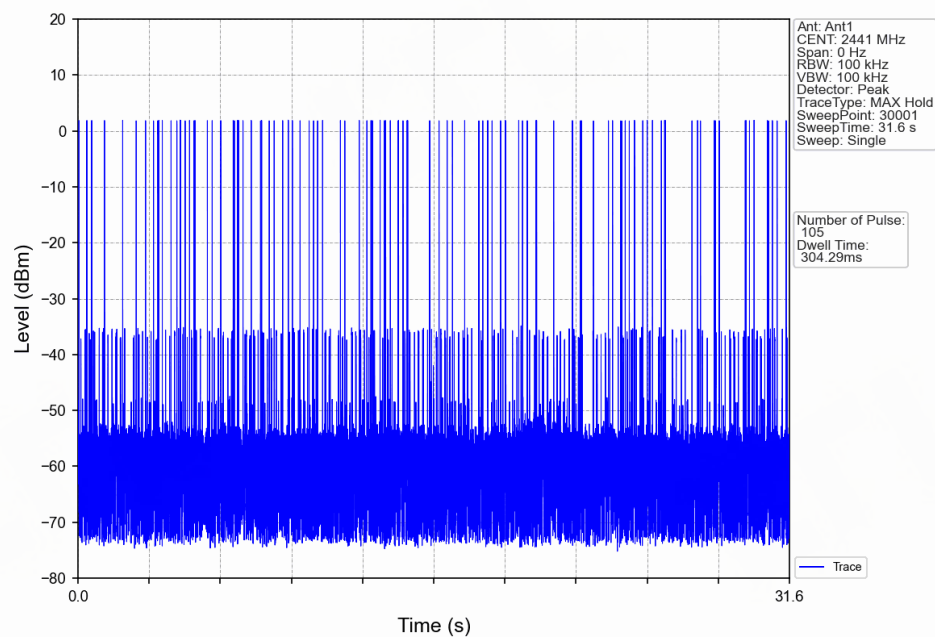


Pi/4DQPSK 2DH1 HOPP Ant1 NTNV

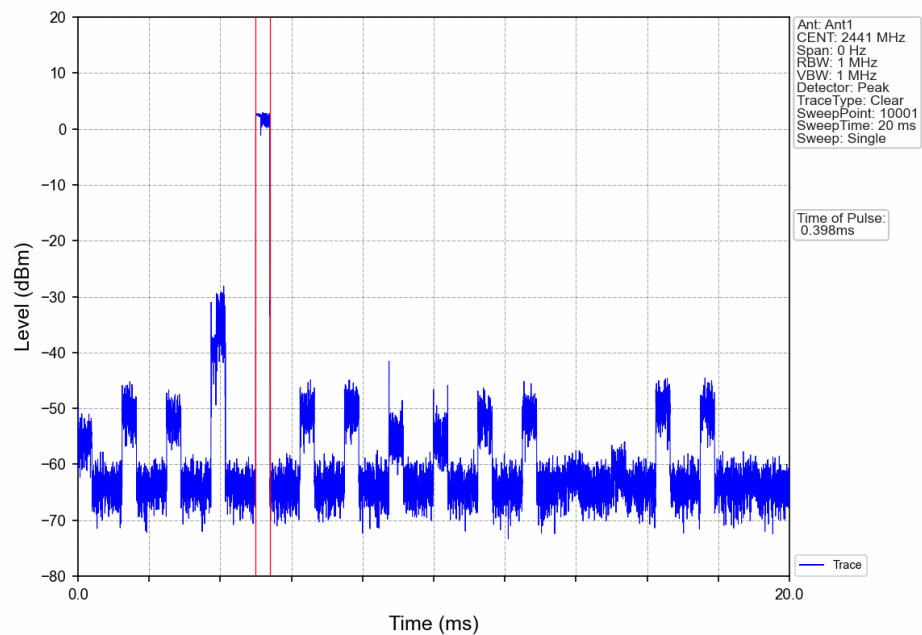


Pi/4DQPSK 2DH1 HOPP Ant1 NTNV

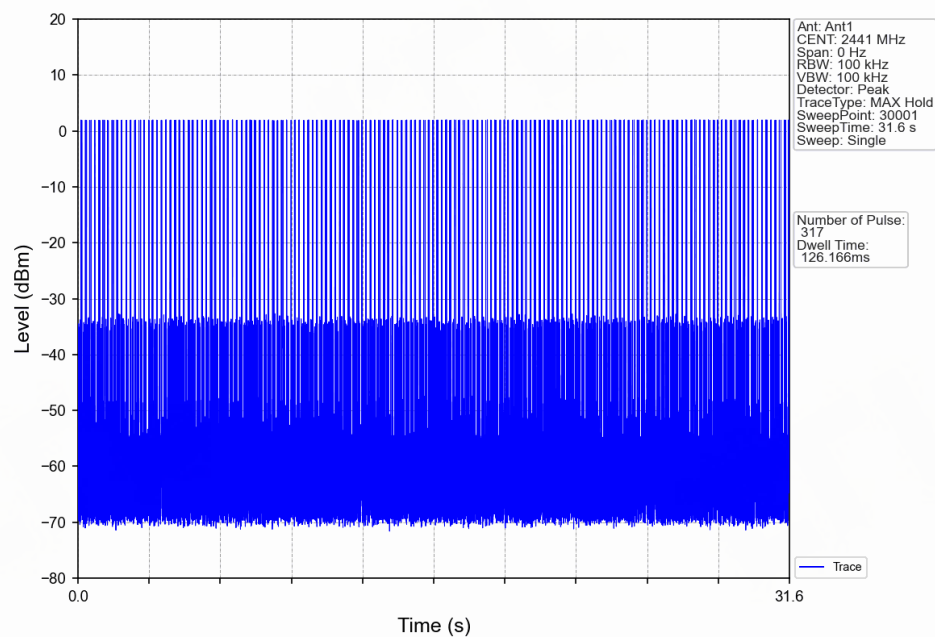


Pi/4DQPSK 2DH3 HOPP Ant1 NTN

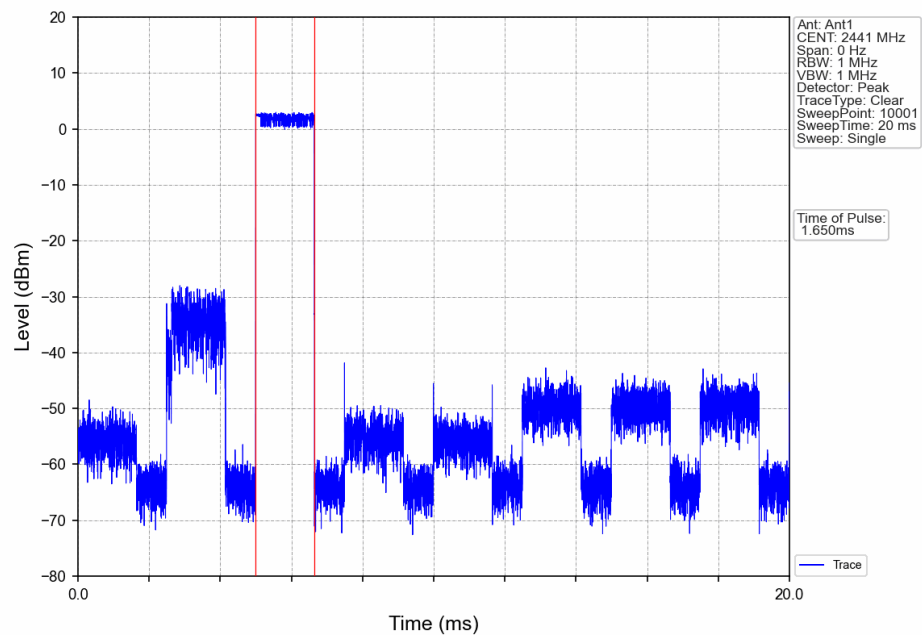


Pi/4DQPSK 2DH3 HOPP Ant1 NTN

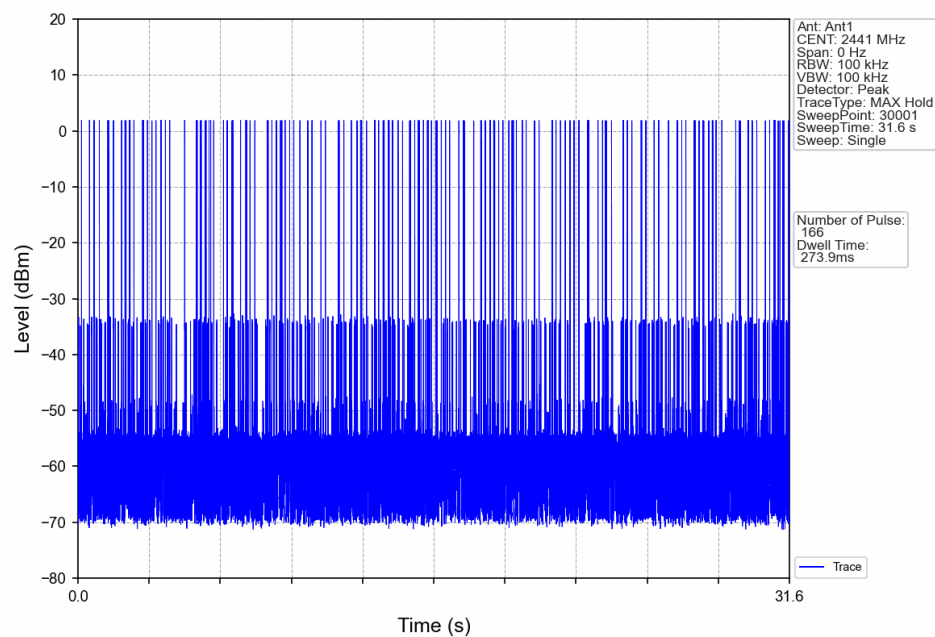


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

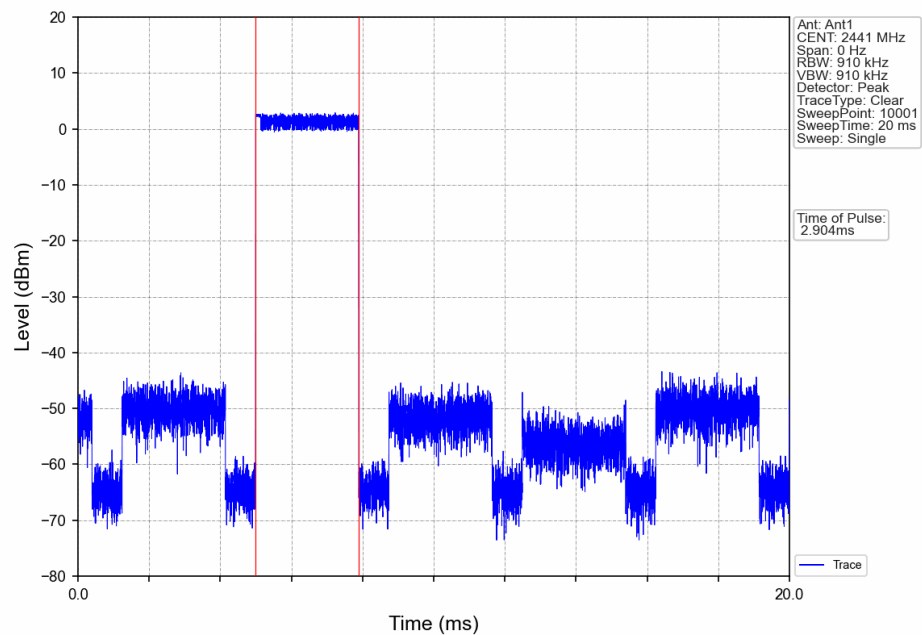


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

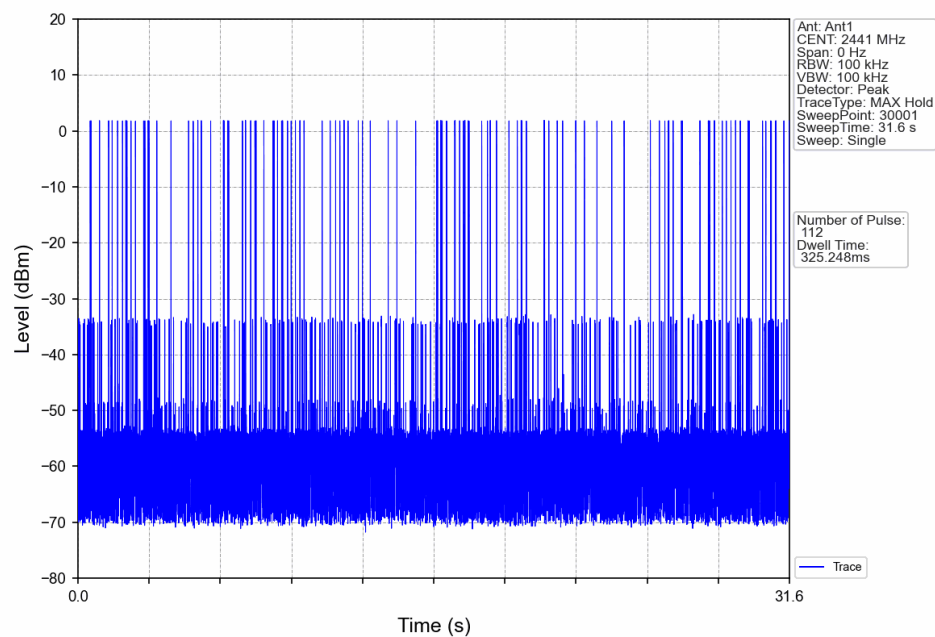


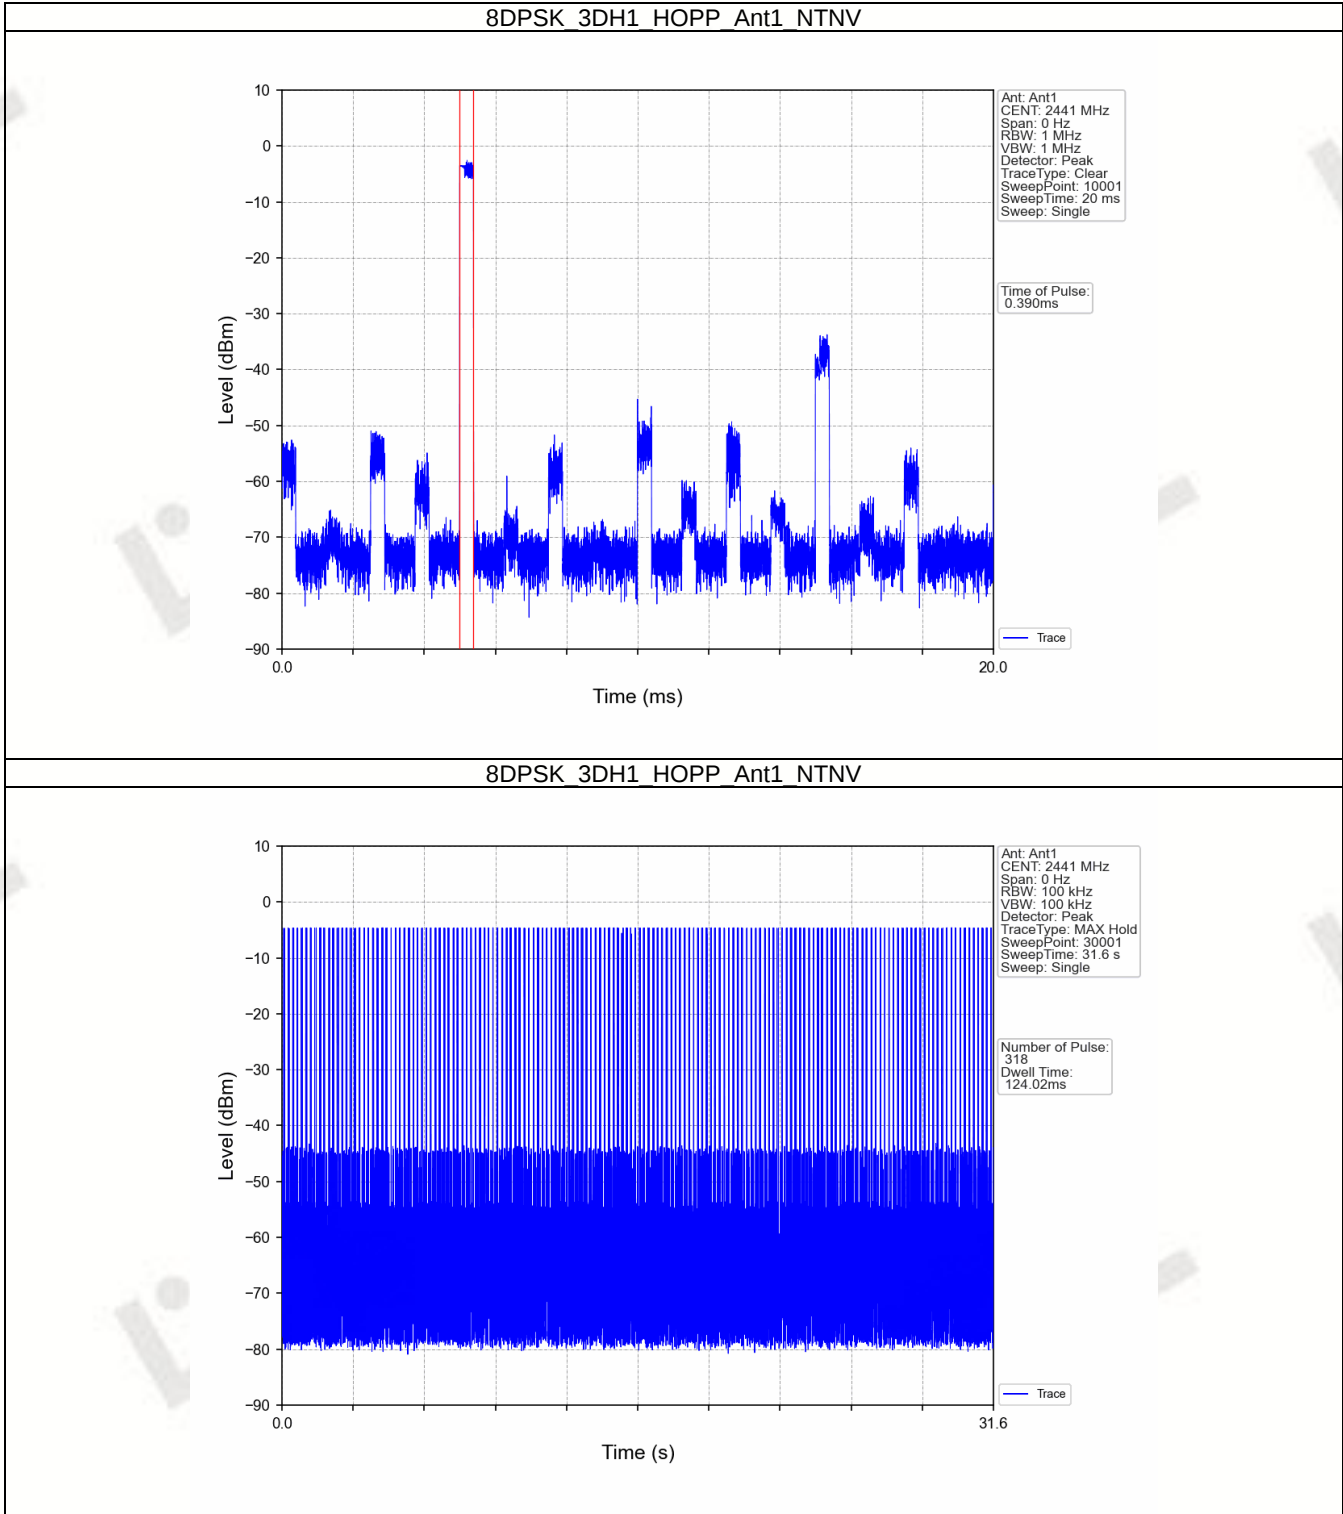


8DPSK 3DH3 HOPP Ant1 NTN

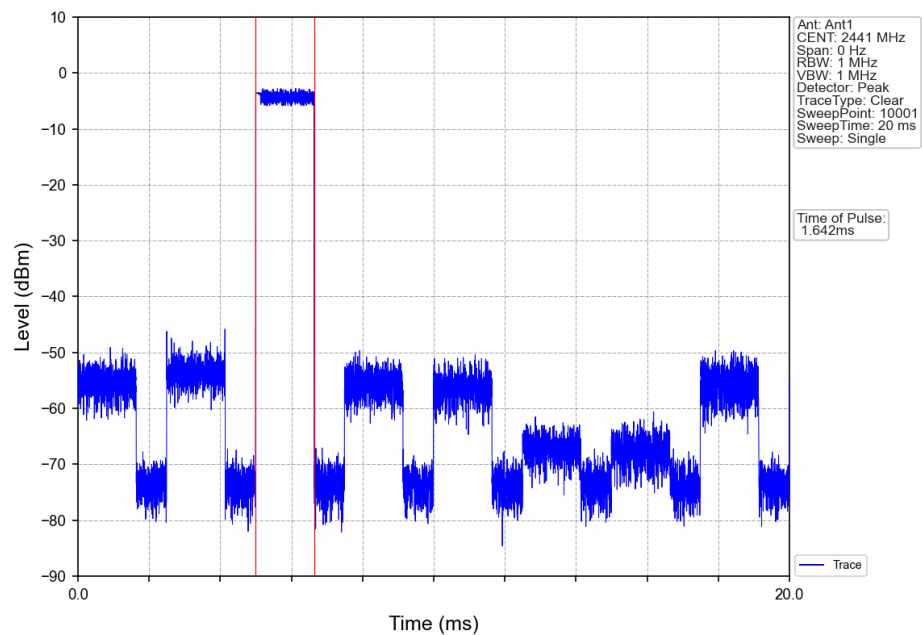

8DPSK 3DH3 HOPP Ant1 NTN

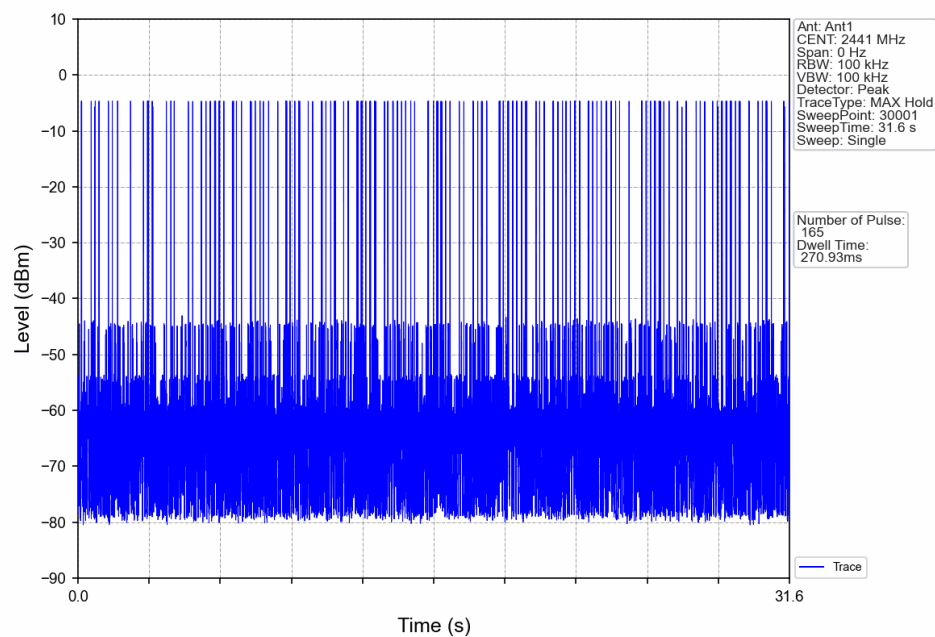

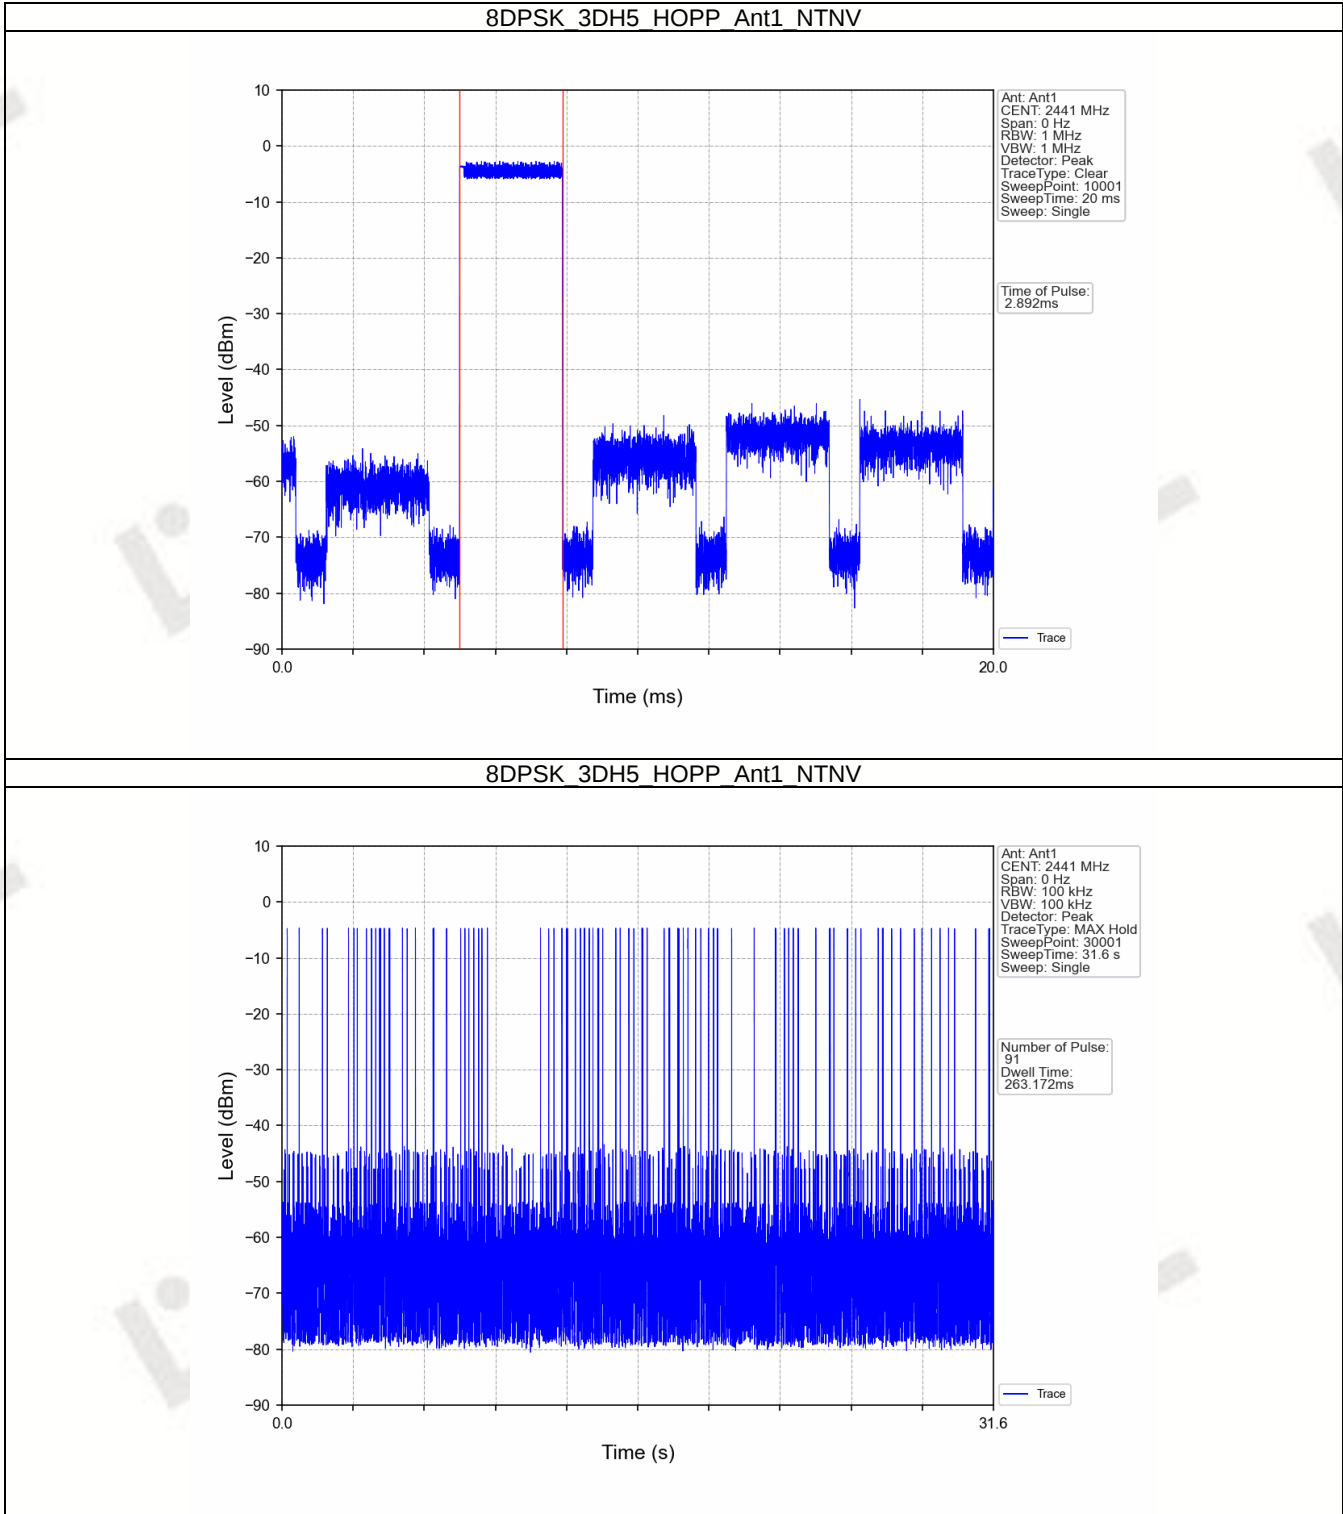

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	1.68
		2441	DH5	1	2.41
		2480	DH5	1	2.39
Pi/4DQPSK	SISO	2402	2DH5	1	1.58
		2441	2DH5	1	2.37
		2480	2DH5	1	2.32
8DPSK	SISO	2402	3DH5	1	1.69
		2441	3DH5	1	2.52
		2480	3DH5	1	2.51

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

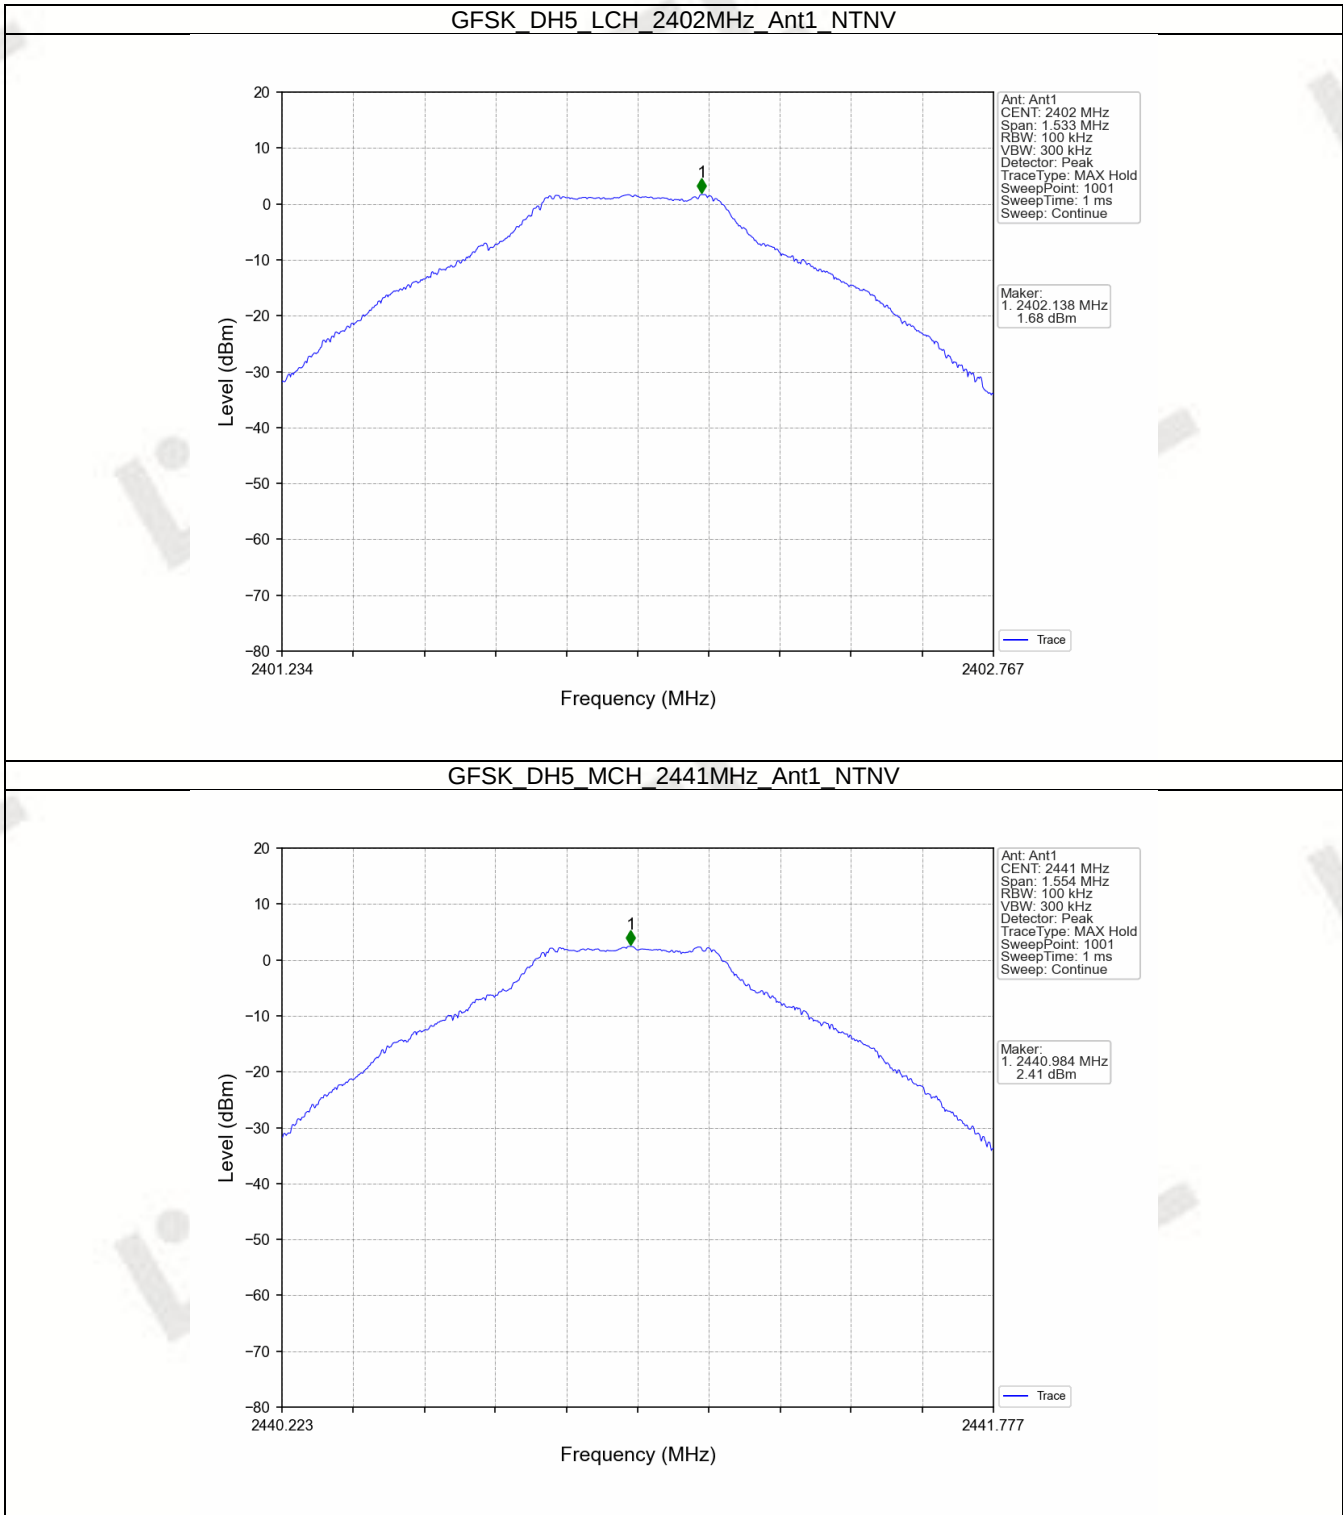


GFSK DH5 HCH 2480MHz Ant1 NTN

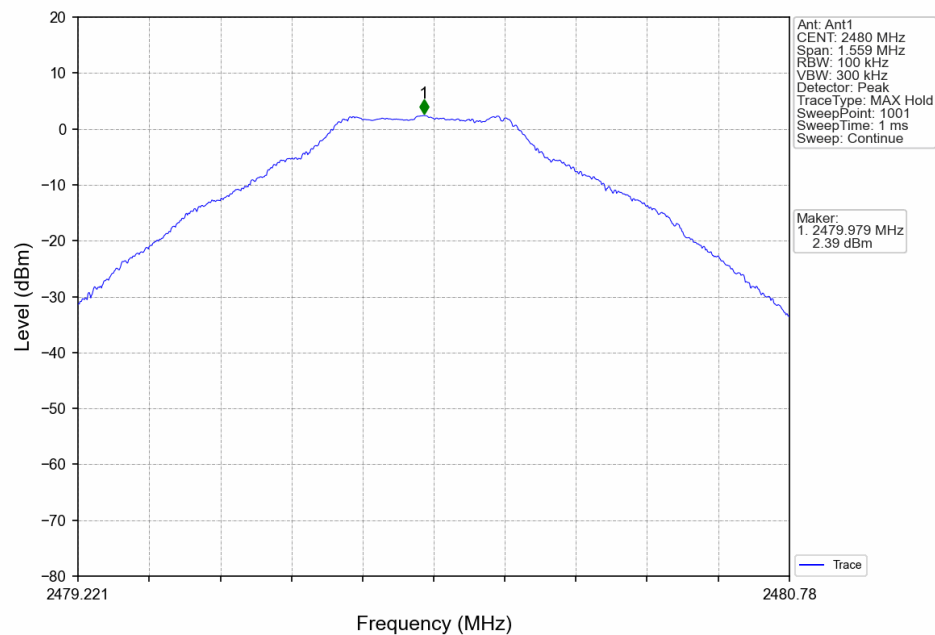


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

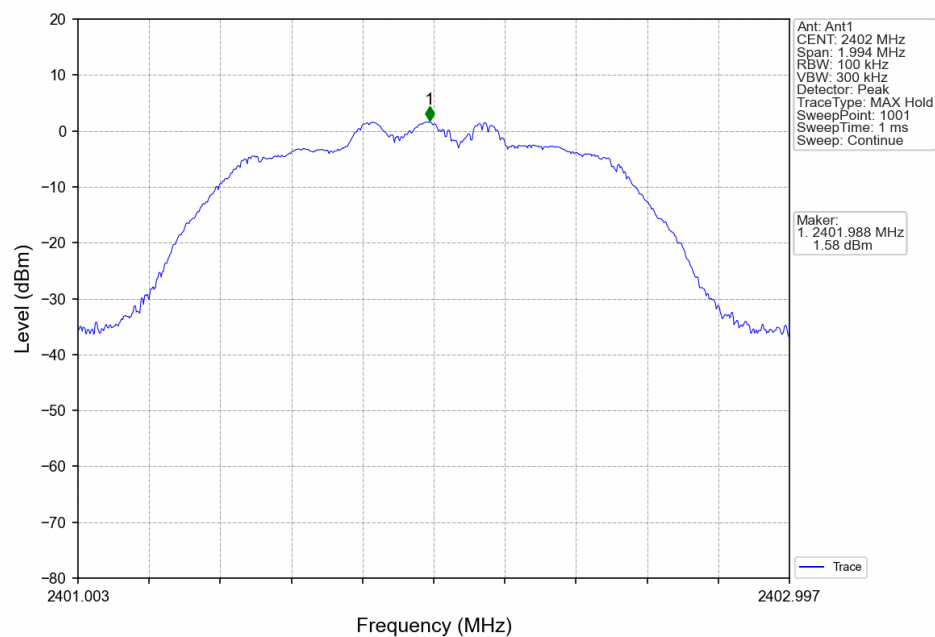


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTNV

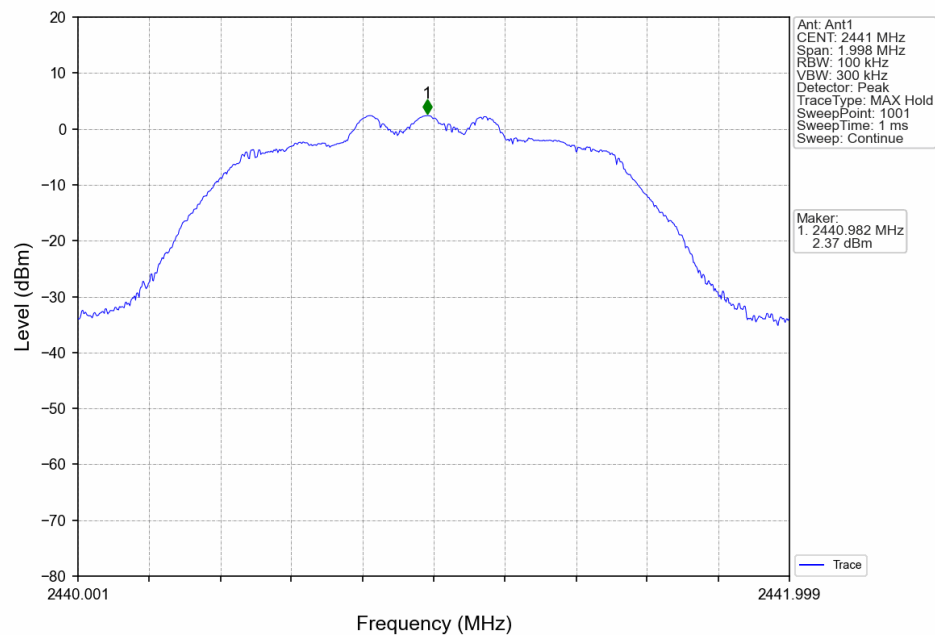


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTNV

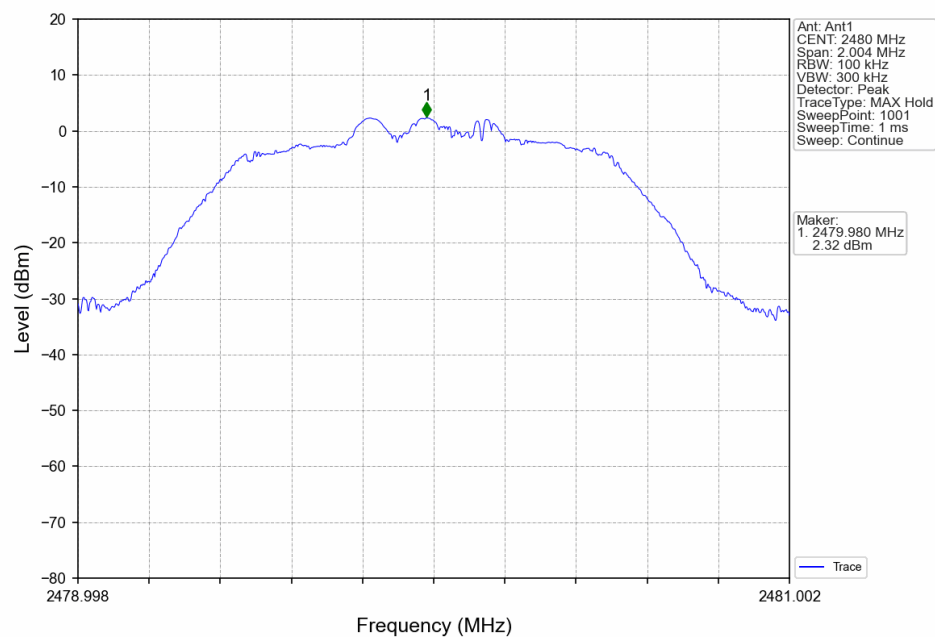


8DPSK 3DH5 LCH 2402MHz Ant1 NTV

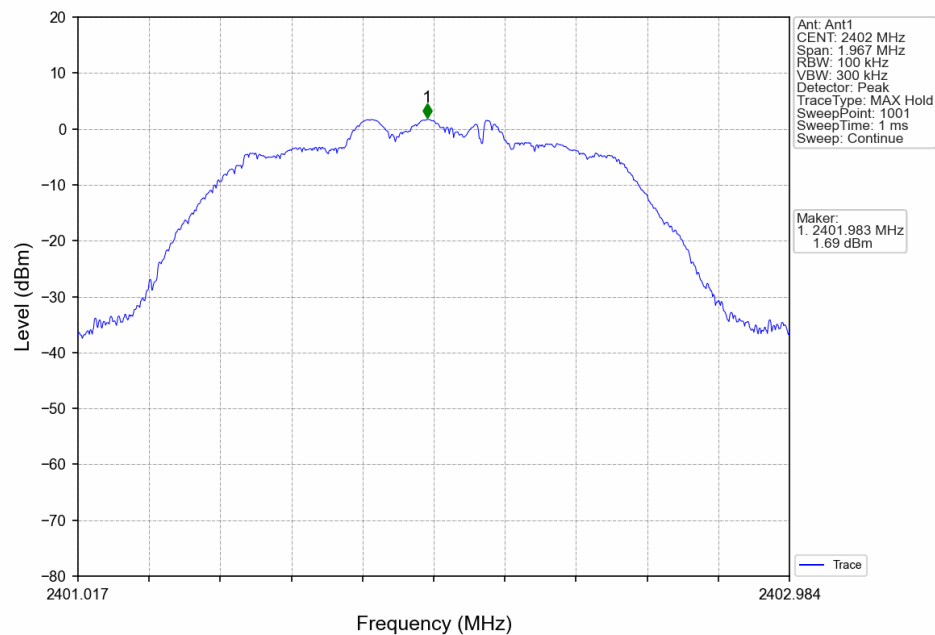

8DPSK 3DH5 MCH 2441MHz Ant1 NTV

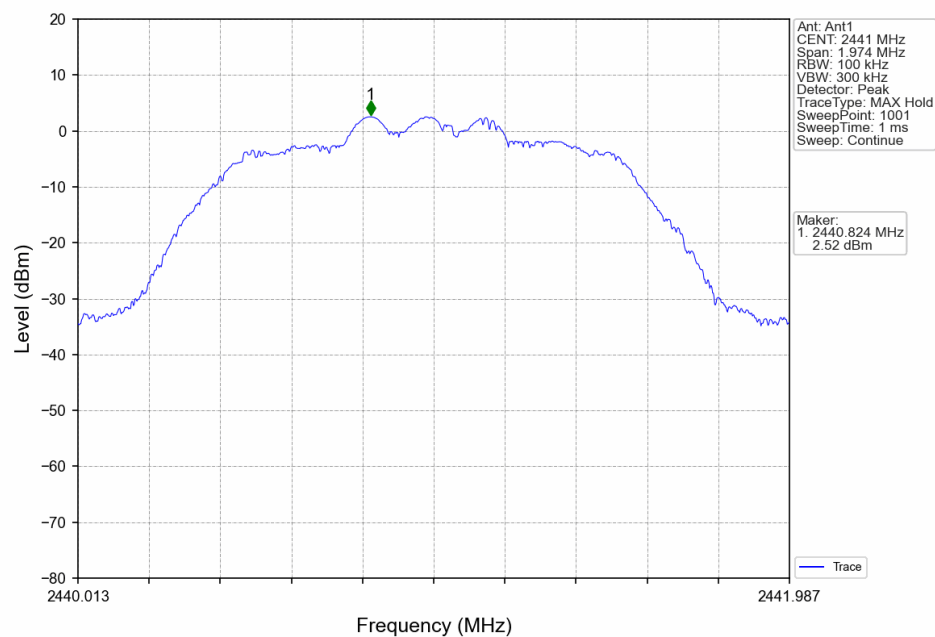

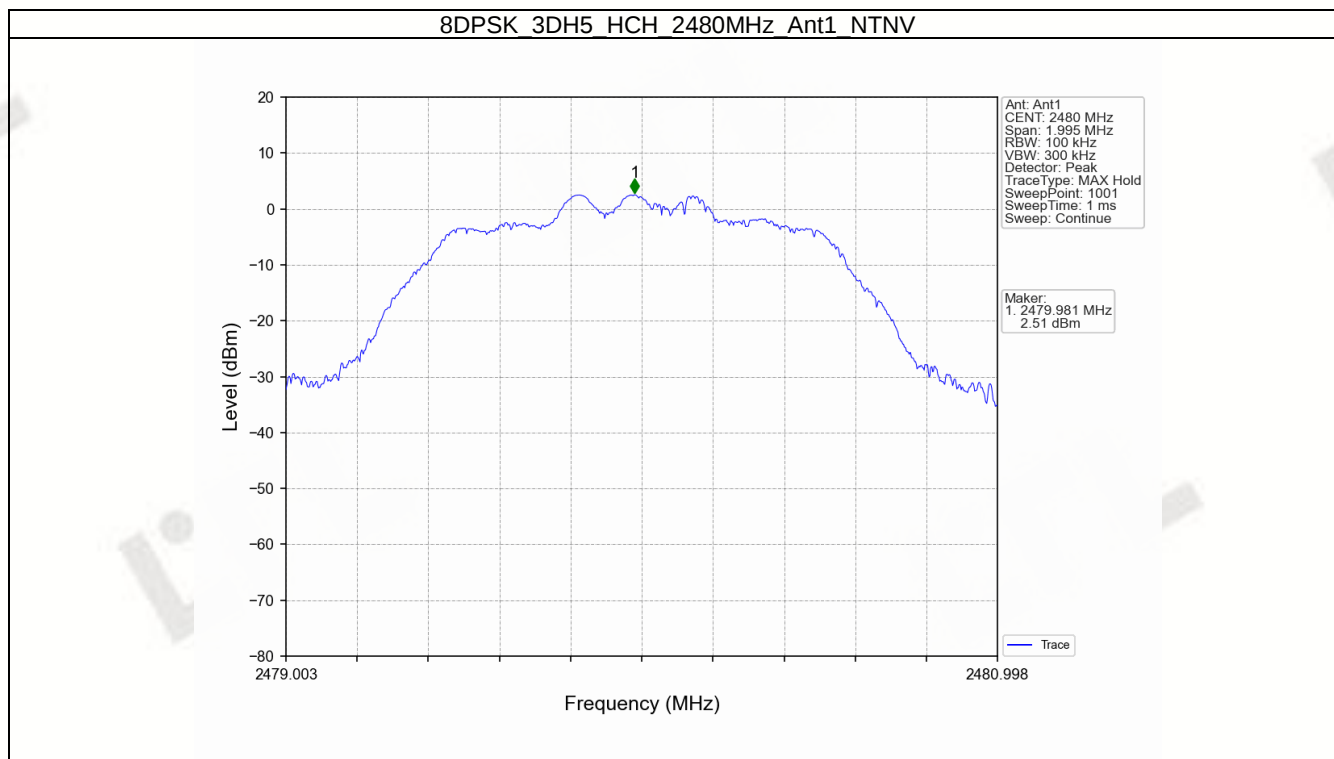


6.2 CSE


6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	2.41	-17.59	Pass
		2441	DH5	1	2.41	-17.59	Pass
		2480	DH5	1	2.41	-17.59	Pass
		HOPP	DH5	1	2.41	-17.59	Pass
					2.41	-17.59	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	2.37	-17.63	Pass
		2441	2DH5	1	2.37	-17.63	Pass
		2480	2DH5	1	2.37	-17.63	Pass
		HOPP	2DH5	1	2.37	-17.63	Pass
					2.37	-17.63	Pass
8DPSK	SISO	2402	3DH5	1	2.52	-17.48	Pass
		2441	3DH5	1	2.52	-17.48	Pass
		2480	3DH5	1	2.52	-17.48	Pass
		HOPP	3DH5	1	2.52	-17.48	Pass
					2.52	-17.48	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							


6.2.2 Test Graph

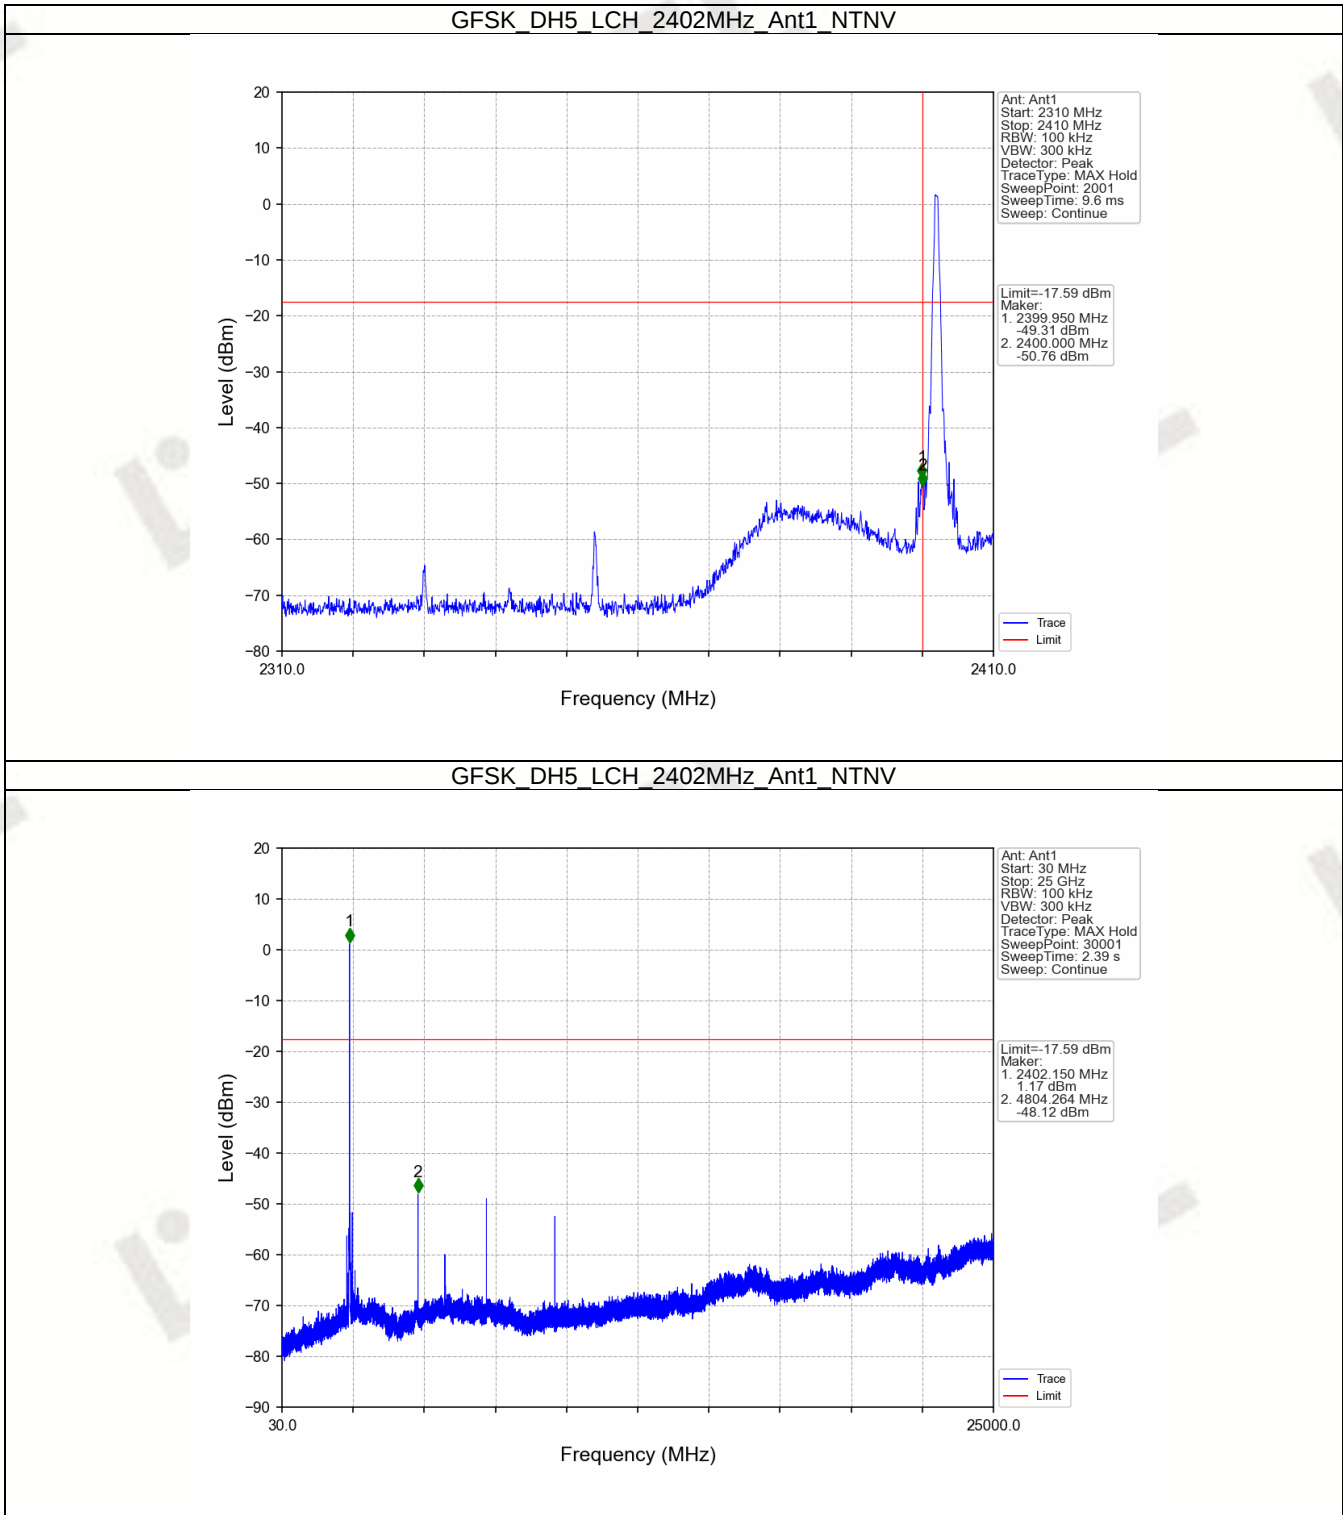


GFSK DH5 MCH 2441MHz Ant1 NTN

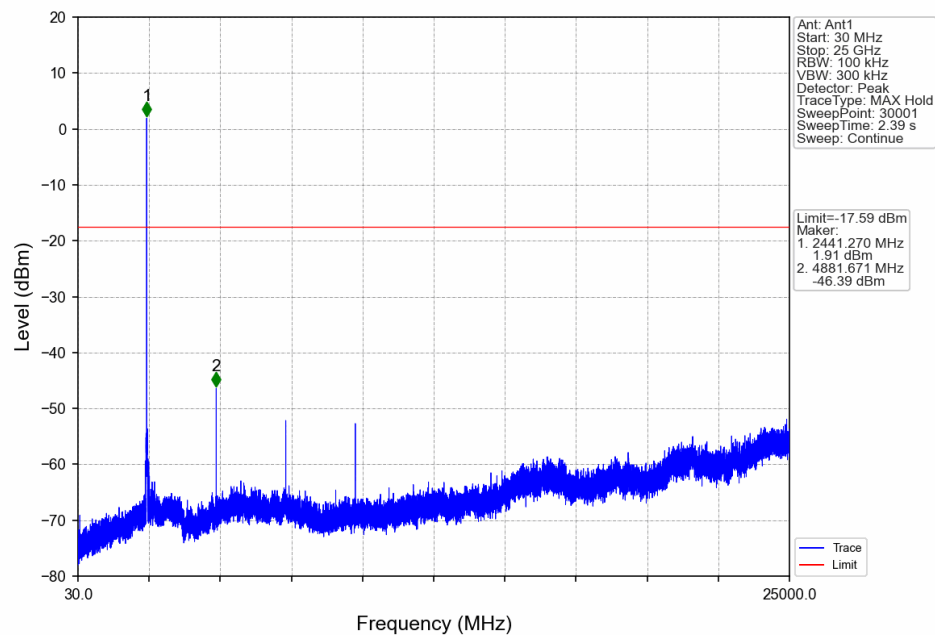


GFSK DH5 HCH 2480MHz Ant1 NTN

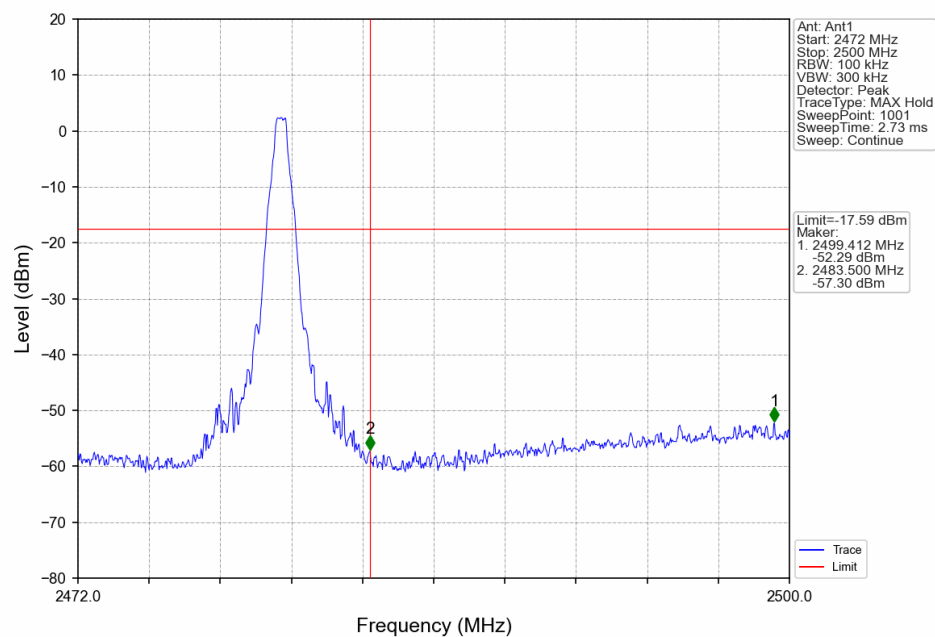


GFSK DH5 HCH 2480MHz Ant1 NTN

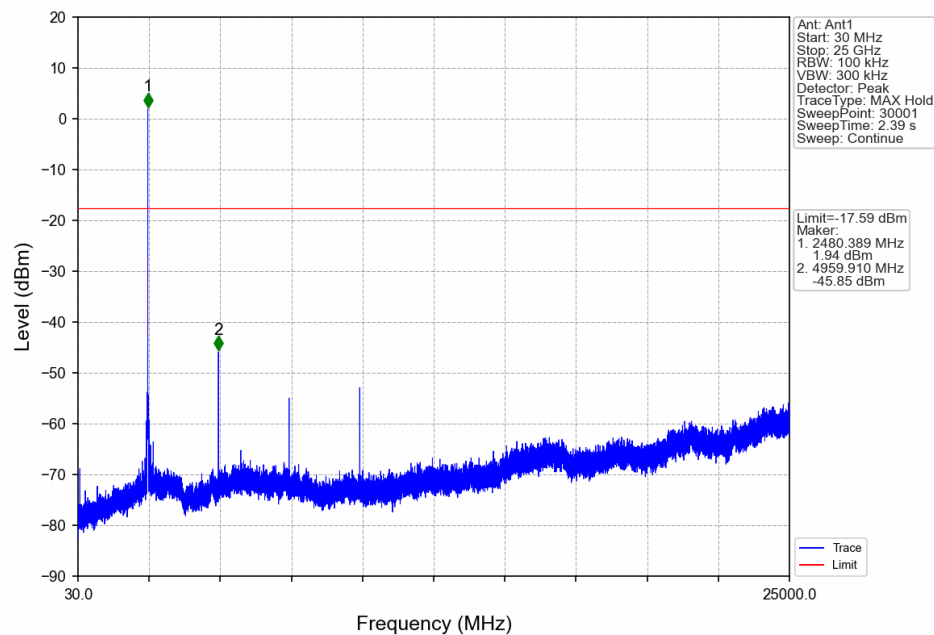


GFSK DH5 HOPP Ant1 NTN

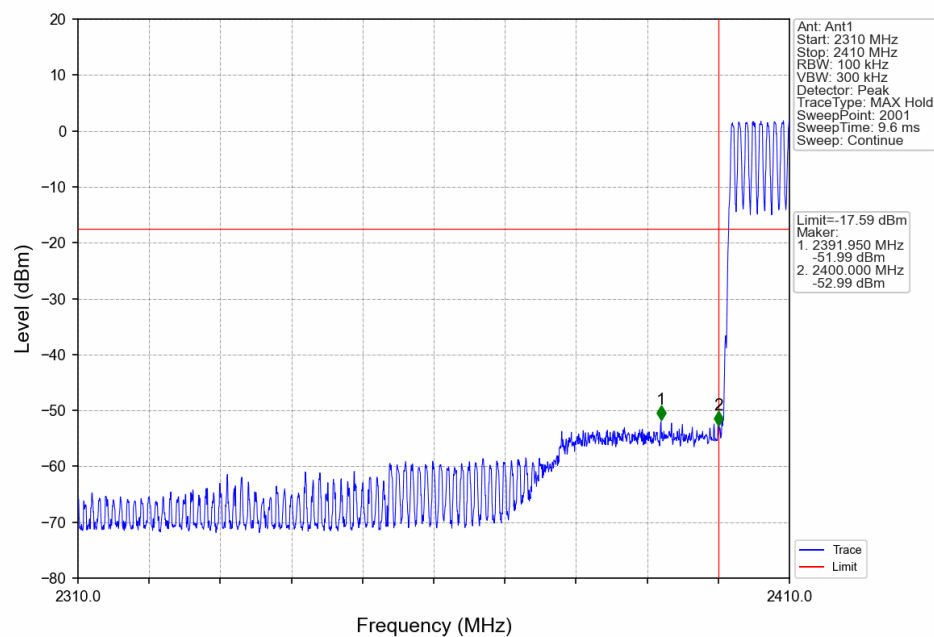


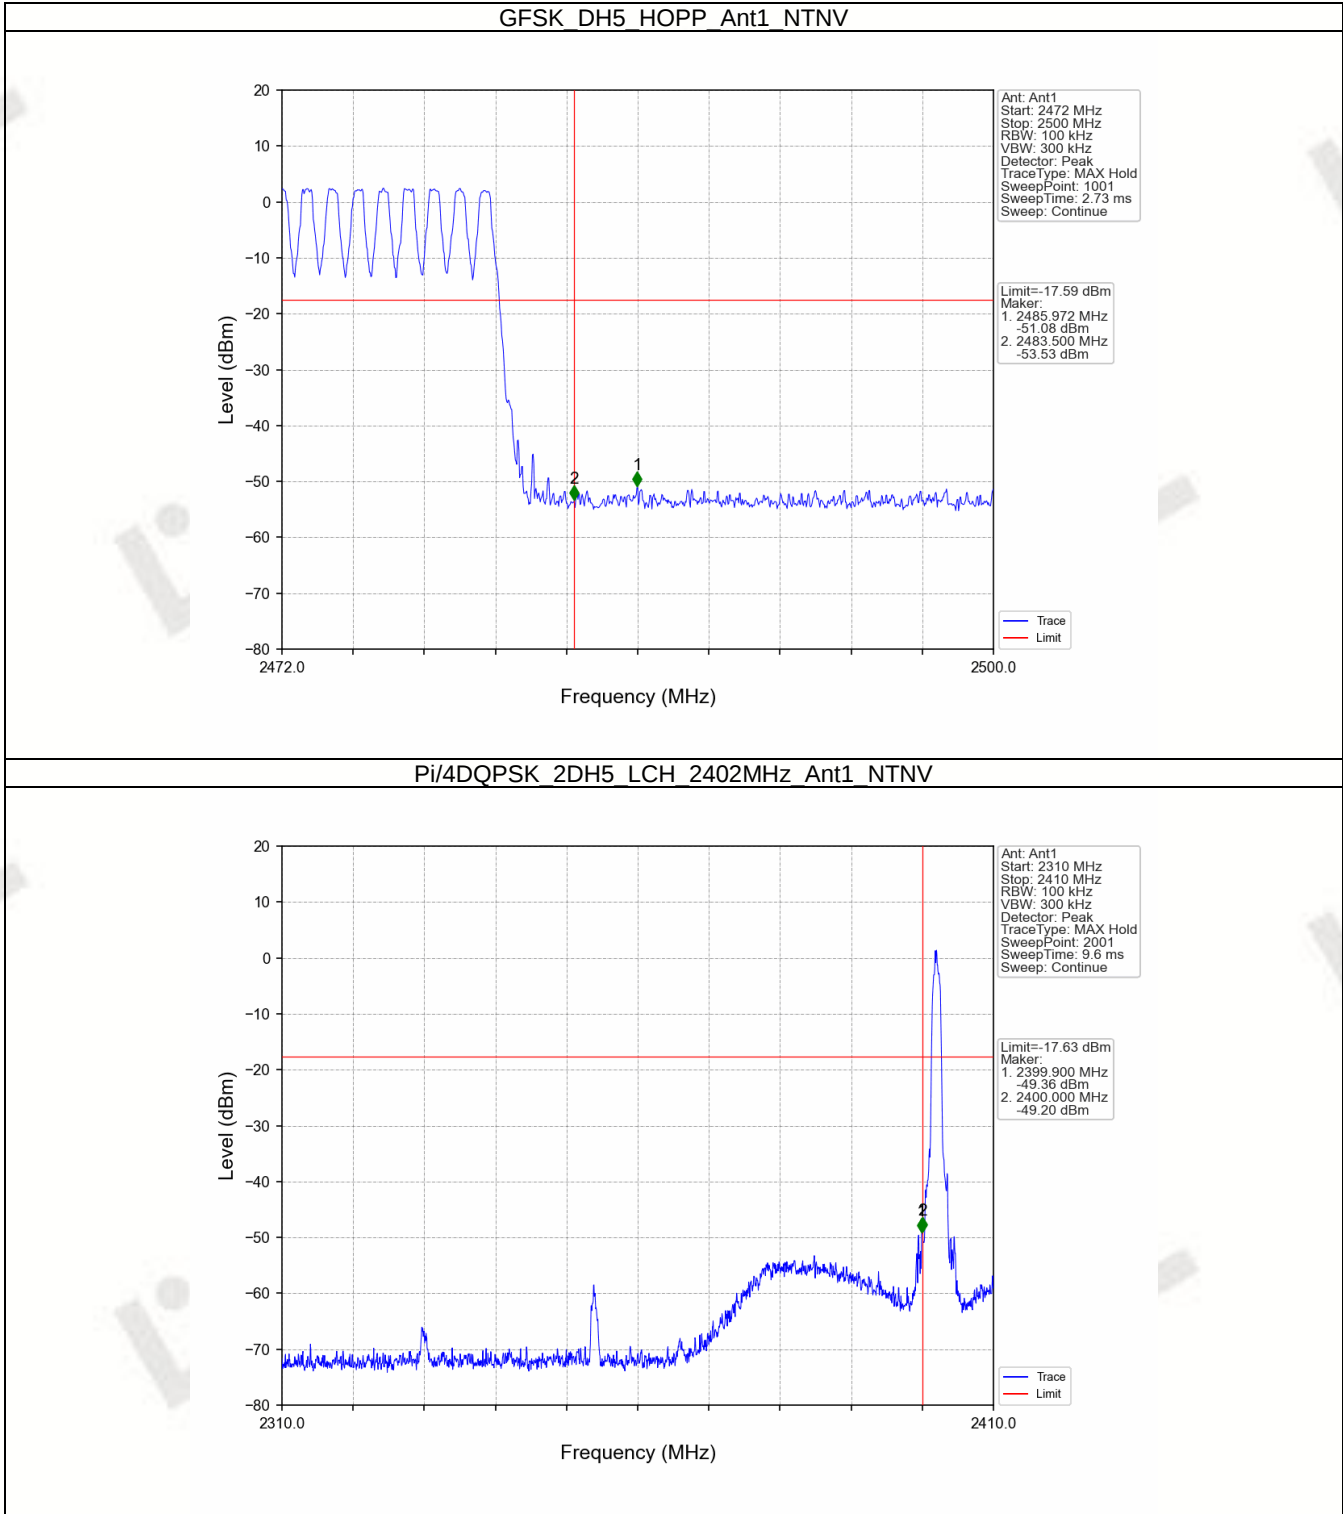


Pi/4DQPSK 2DH5 LCH 2402MHz Ant1 NTN

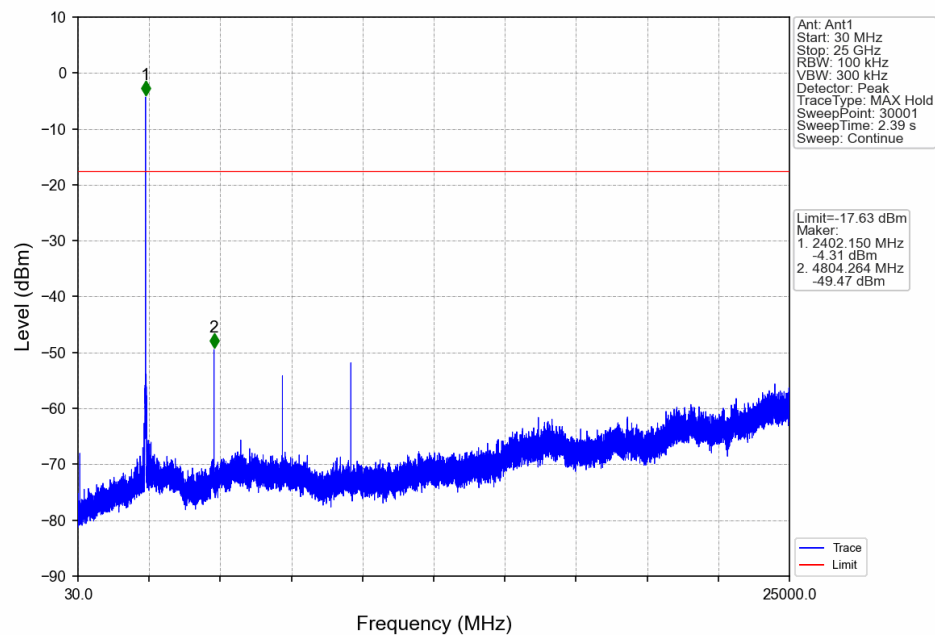


Pi/4DQPSK 2DH5 MCH 2441MHz Ant1 NTN

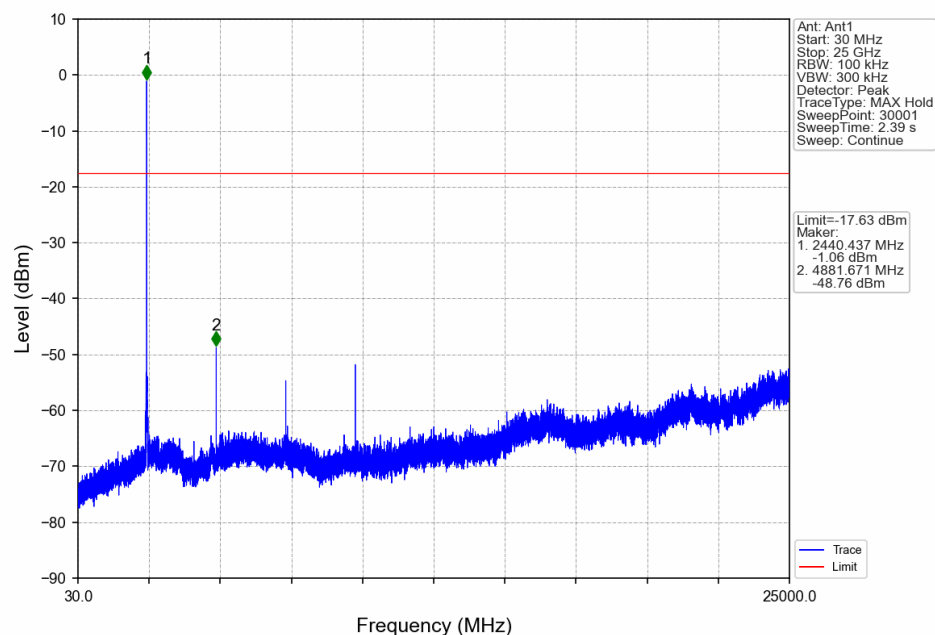


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

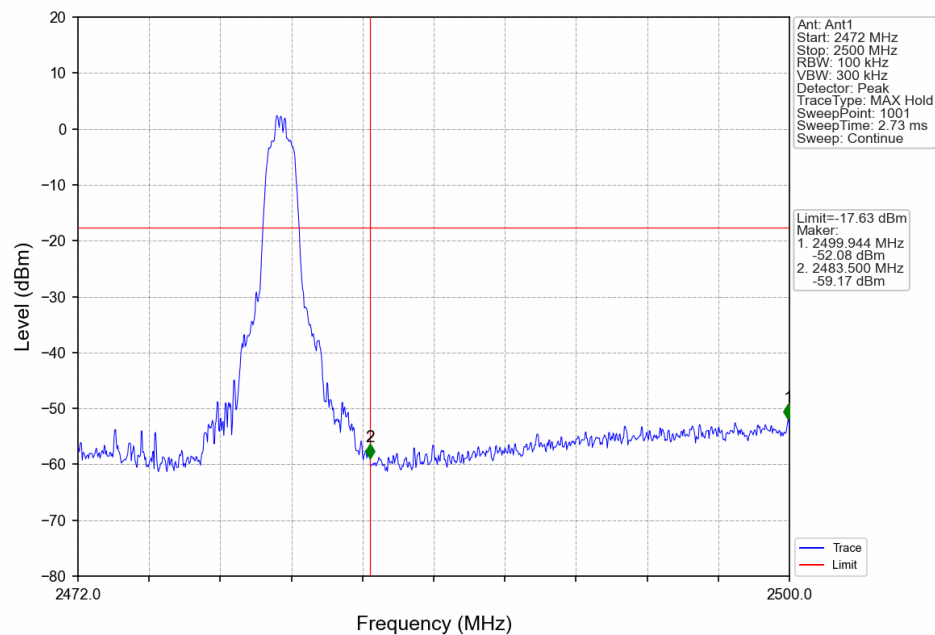


Pi/4DQPSK 2DH5 HCH 2480MHz Ant1 NTN

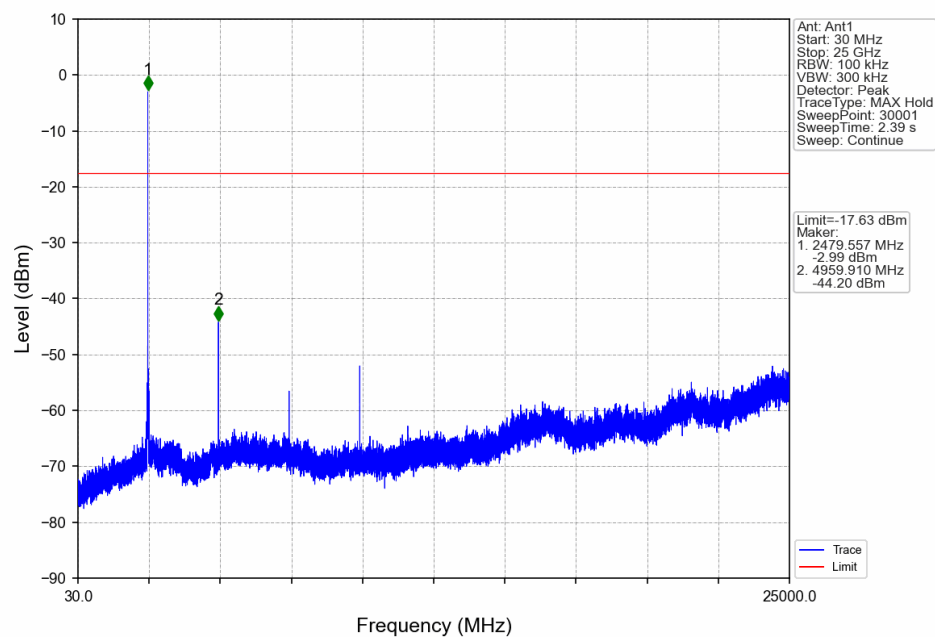


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

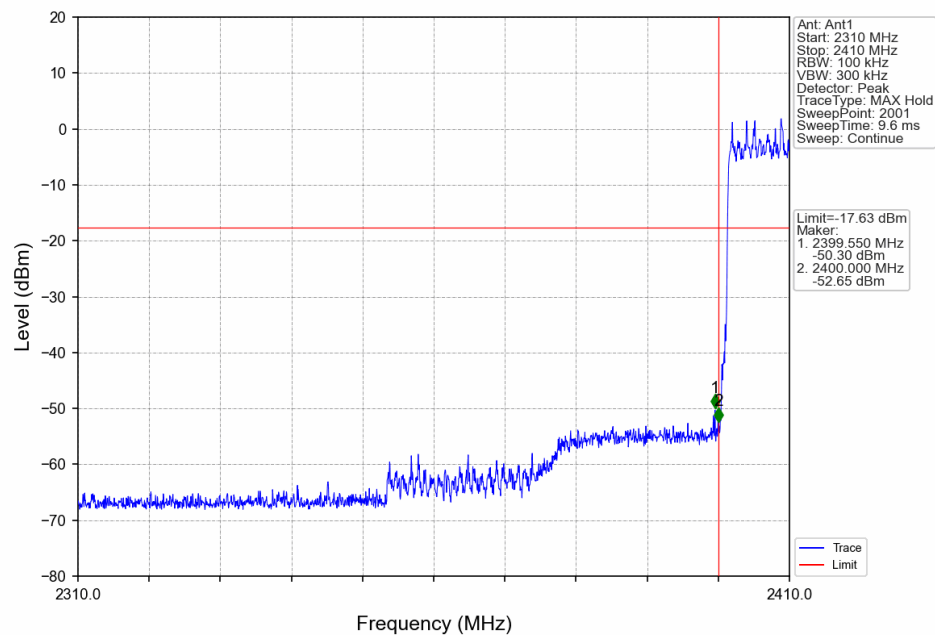


Pi/4DQPSK 2DH5 HOPP Ant1 NTN

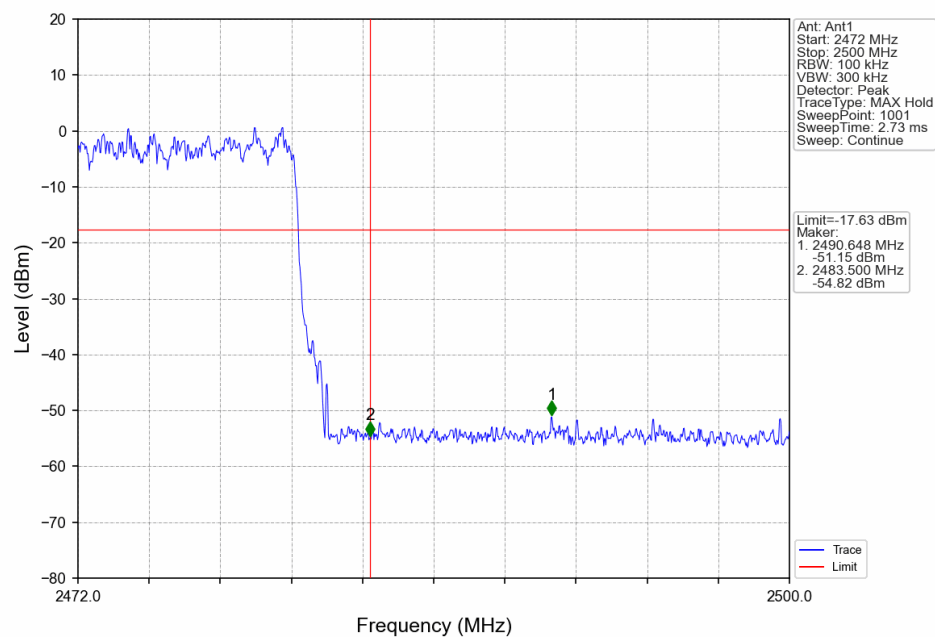


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

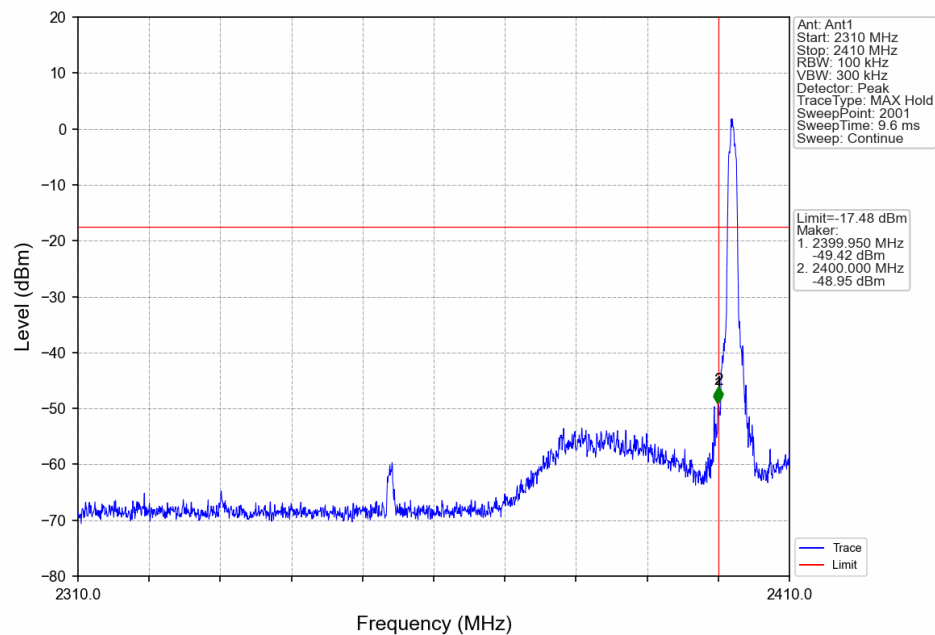


8DPSK 3DH5 LCH 2402MHz Ant1 NTN

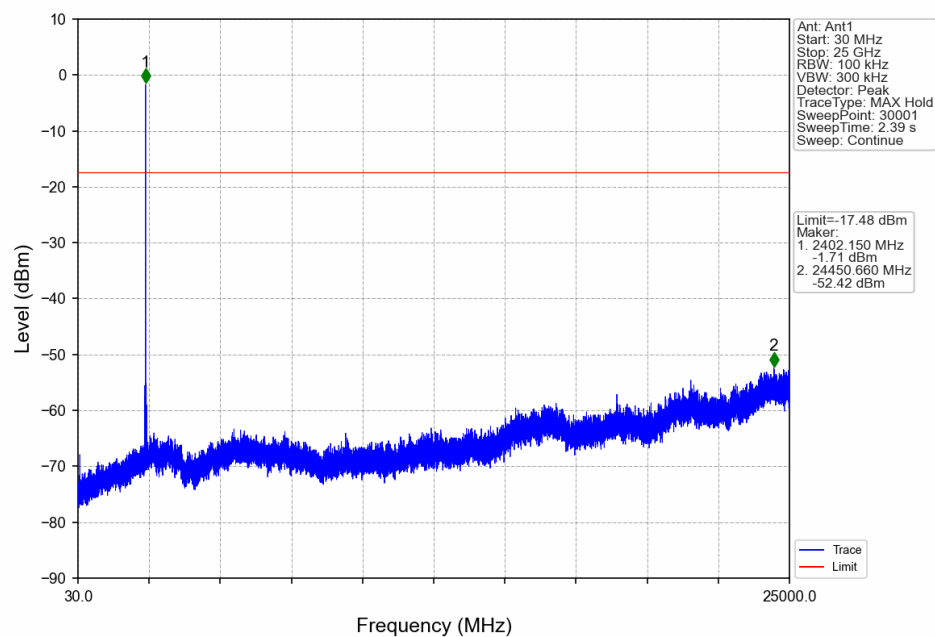


8DPSK 3DH5 MCH 2441MHz Ant1 NTN

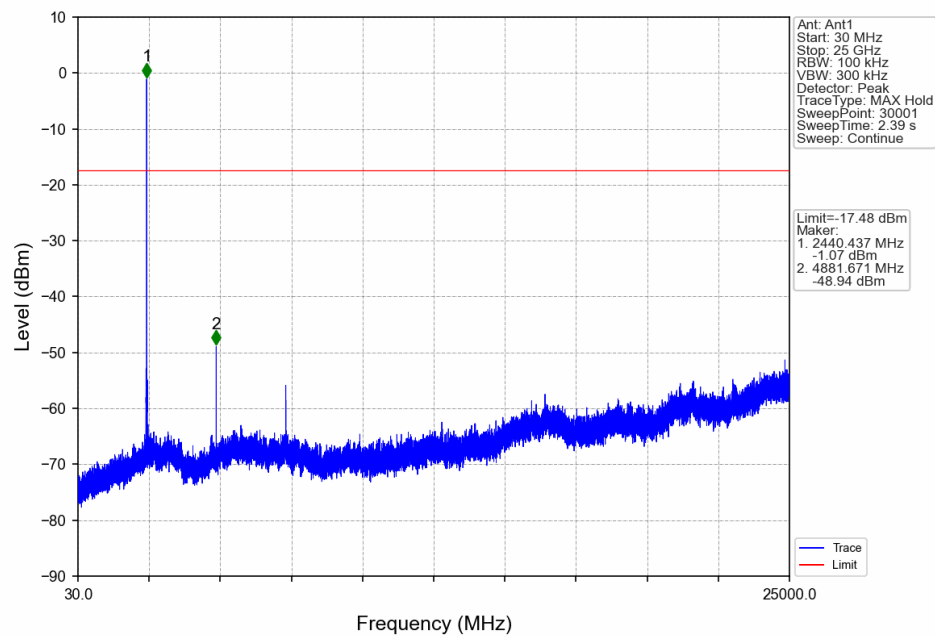

8DPSK 3DH5 HCH 2480MHz Ant1 NTN

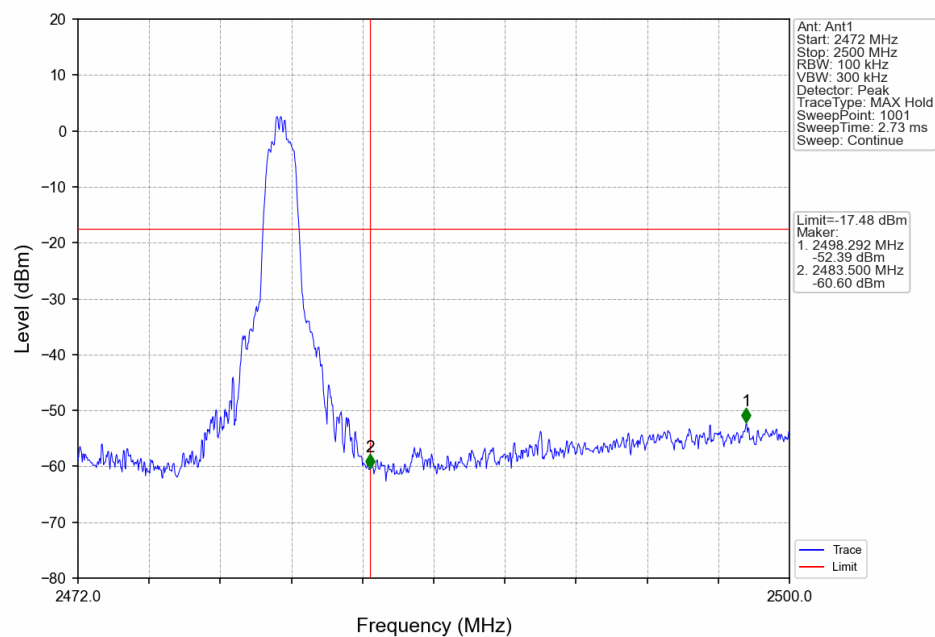

8DPSK 3DH5 HCH 2480MHz Ant1 NTN

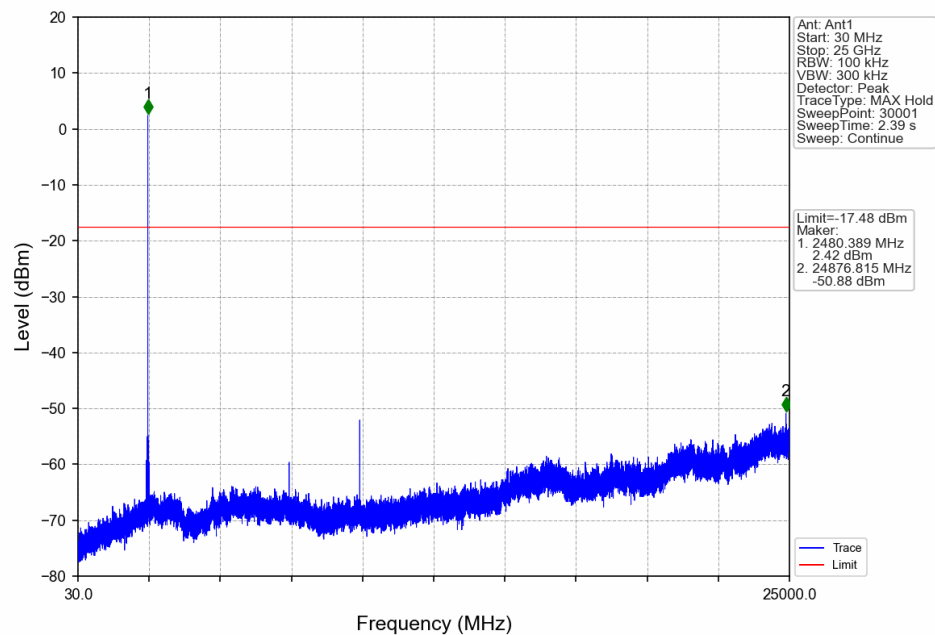

8DPSK 3DH5 HOPP Ant1 NTN

