



FCC RF Test Report

APPLICANT : VINFAST TRADING AND PRODUCTION JOINT
STOCK COMPANY
EQUIPMENT : MULTIMEDIA HEAD UNIT
BRAND NAME : VINFAST
MODEL NAME : VF-EC22U
FCC ID : 2A6HEVF-EC22U
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 28, 2022 ~ Jul. 28, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	25
3.6 Antenna Requirements.....	29
4 LIST OF MEASURING EQUIPMENT	30
5 UNCERTAINTY OF EVALUATION	31
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR233104C	Rev. 01	Initial issue of report	Aug. 23, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.09 dB at 2488.450 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	-
3.6	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-
Remark: Not Applicable means after assessing, test items are not necessary to carry out.					

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

VINFAST TRADING AND PRODUCTION JOINT STOCK COMPANY

Dinh Vu - Cat Hai Economic Zone, Cat Hai Island, Cat Hai Town, Cat Hai District, Hai Phong City, Vietnam

1.2 Manufacturer

VINFAST TRADING AND PRODUCTION JOINT STOCK COMPANY

Dinh Vu - Cat Hai Economic Zone, Cat Hai Island, Cat Hai Town, Cat Hai District, Hai Phong City, Vietnam

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	MULTIMEDIA HEAD UNIT
Brand Name	VINFAST
Model Name	VF-EC22U
FCC ID	2A6HEVF-EC22U
IMEI Code	Conducted: 864694040039112 Radiation: 864694040048055
HW Version	C2.2
SW Version	SOW30005092
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a vehicle device, only supports 12Vdc and does not use AC charger.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.16 dBm (0.0655 W) 802.11g : 22.88 dBm (0.1941 W) 802.11n HT20 : 21.99 dBm (0.1581 W)
Antenna Type / Gain	Fixed Internal Antenna with gain 3.264 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	6.2009-8-24a

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

2.3 Connection Diagram of Test System

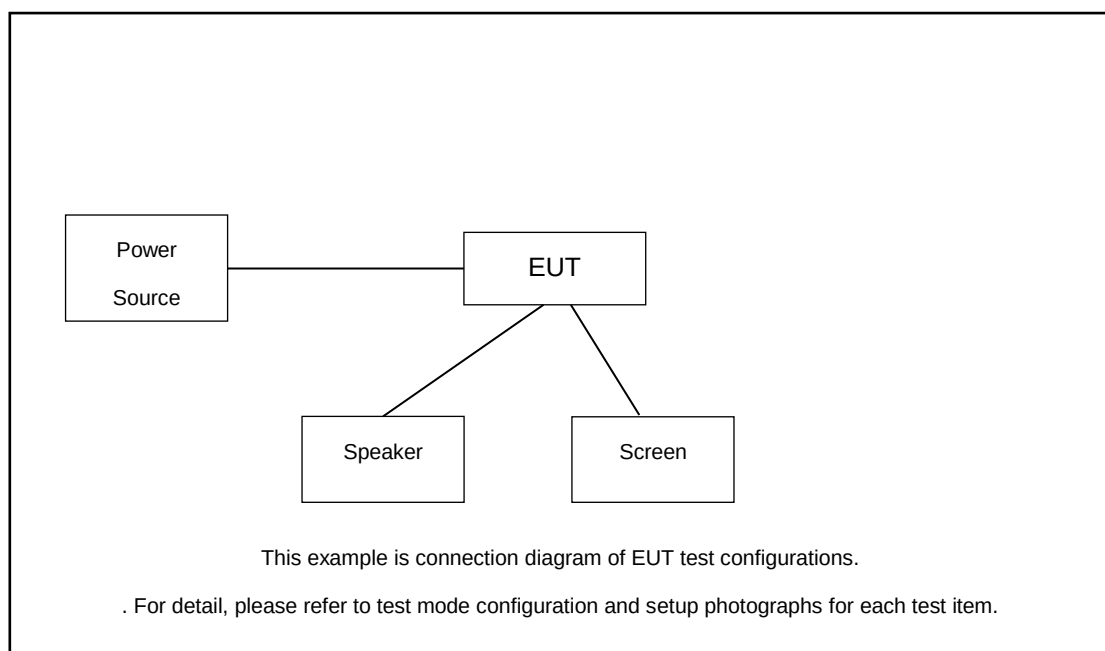

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power	GWINSTEK	PLR36-10	N/A	N/A	Unshielded,1.8m
2.	WWAN Antenna	N/A	N/A	N/A	N/A	N/A
3.	WLAN Antenna	N/A	N/A	N/A	N/A	N/A
4.	GNSS Antenna	N/A	N/A	N/A	N/A	N/A
5.	Speaker	N/A	N/A	N/A	N/A	N/A
6.	Screen	N/A	N/A	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.8dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.8(\text{dB})\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

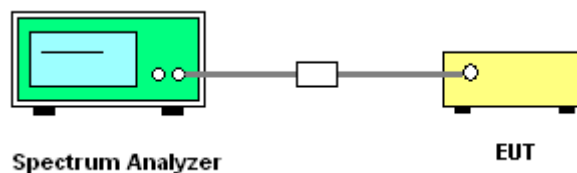



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

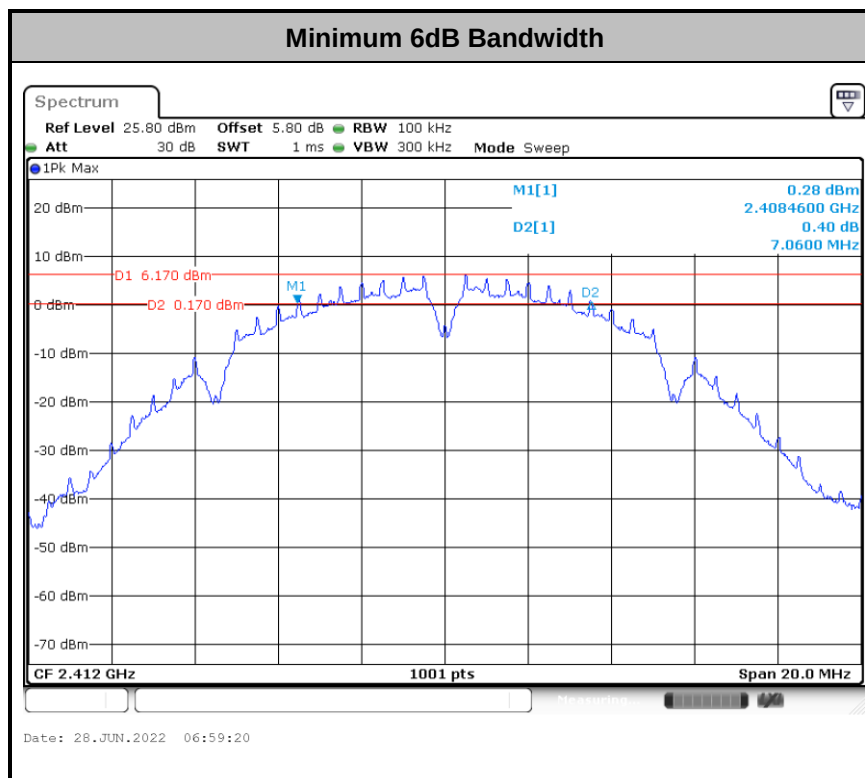

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

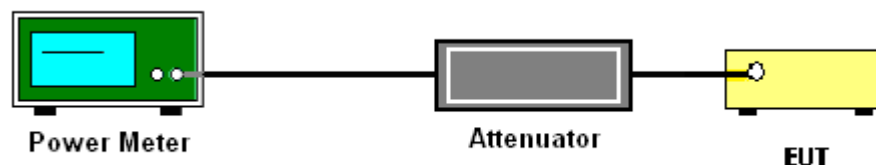

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

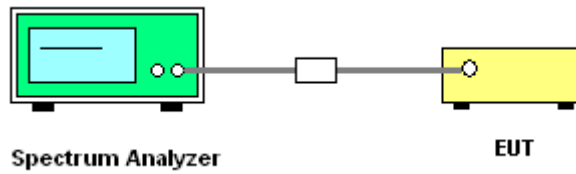

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

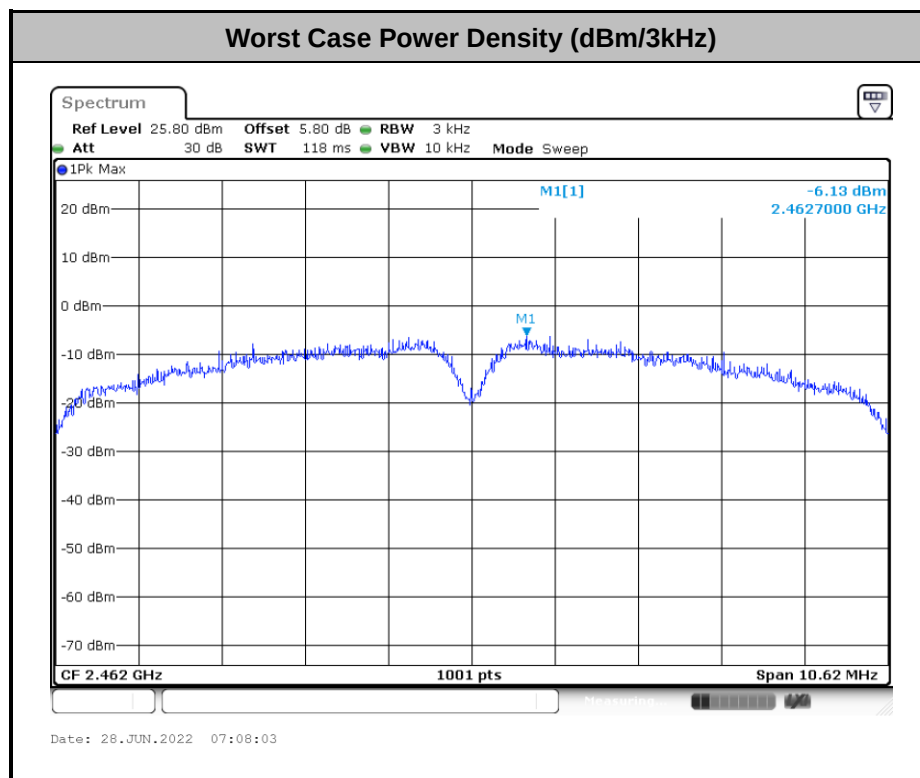

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

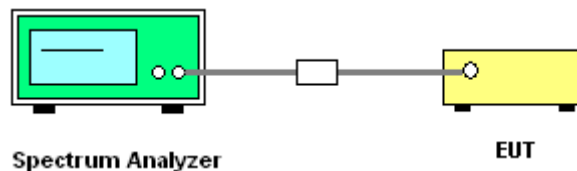




3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	albert shi	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

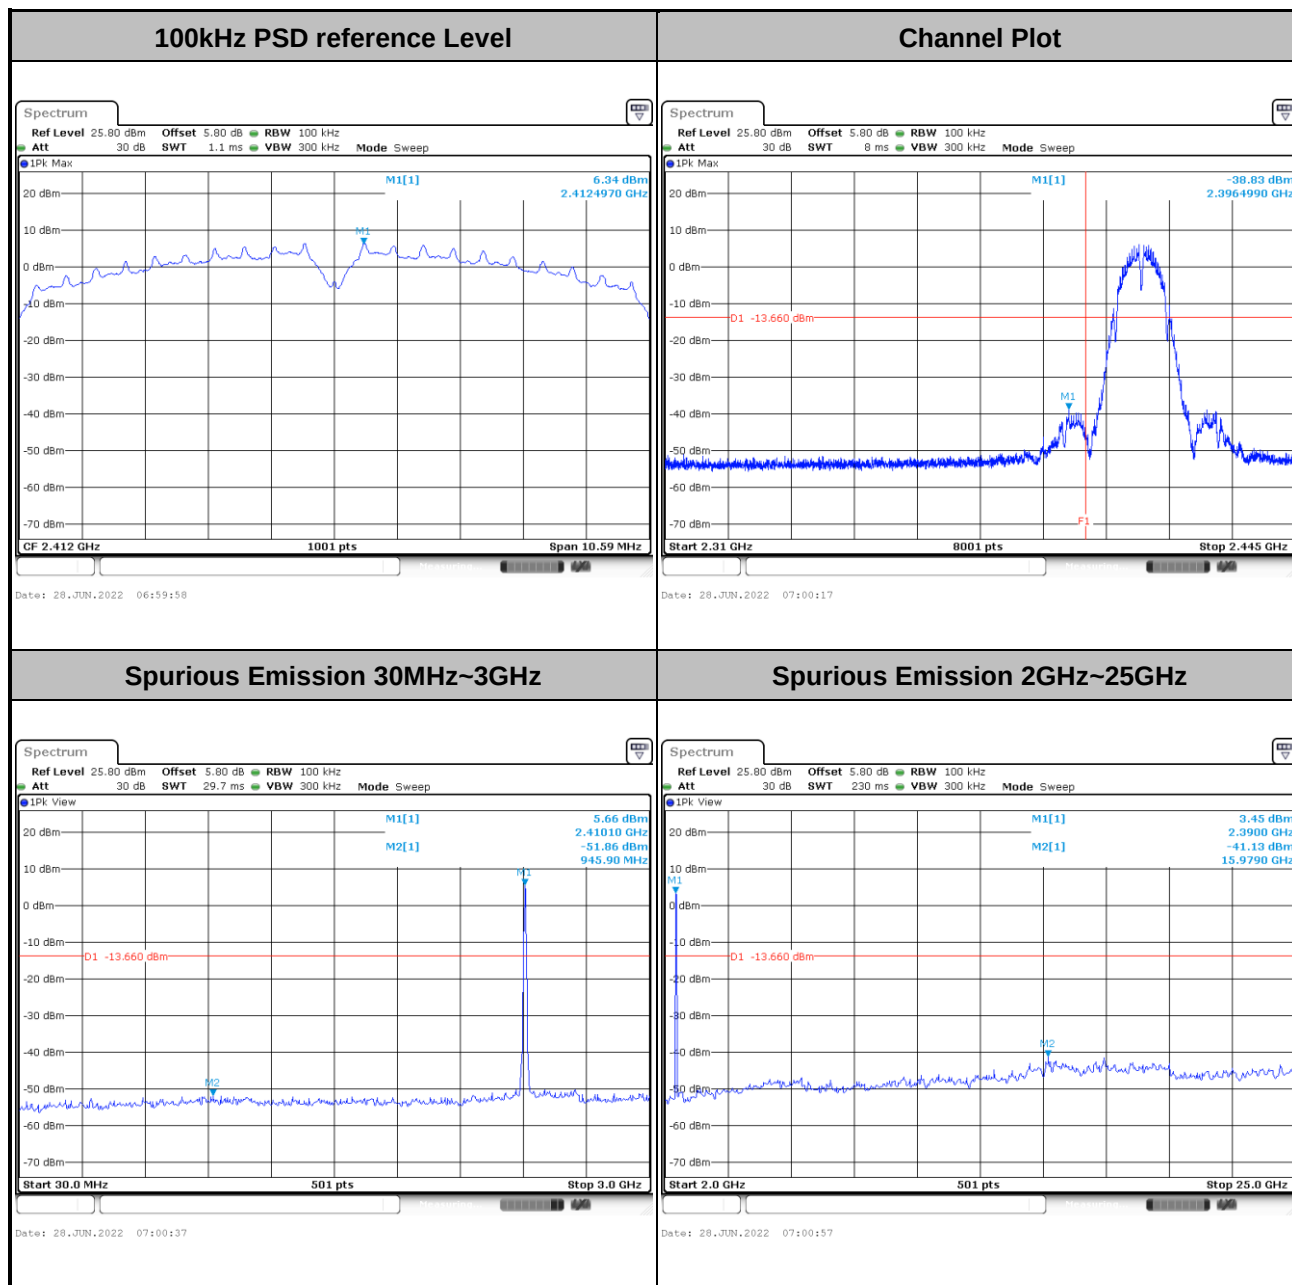




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

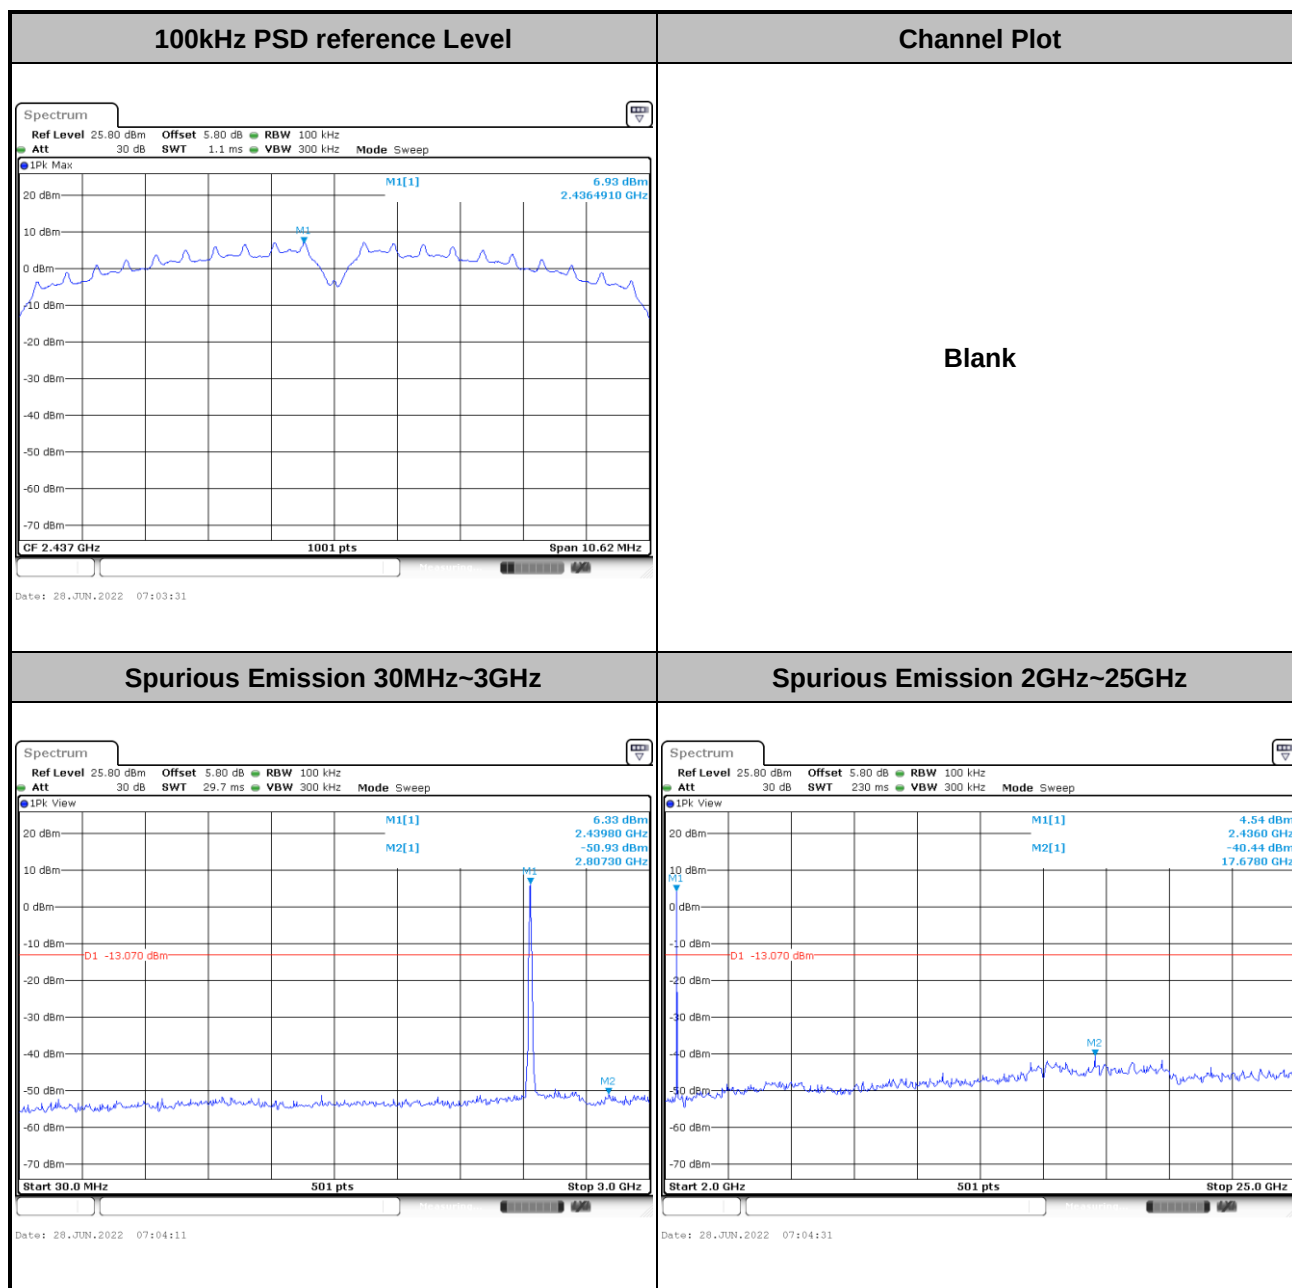




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

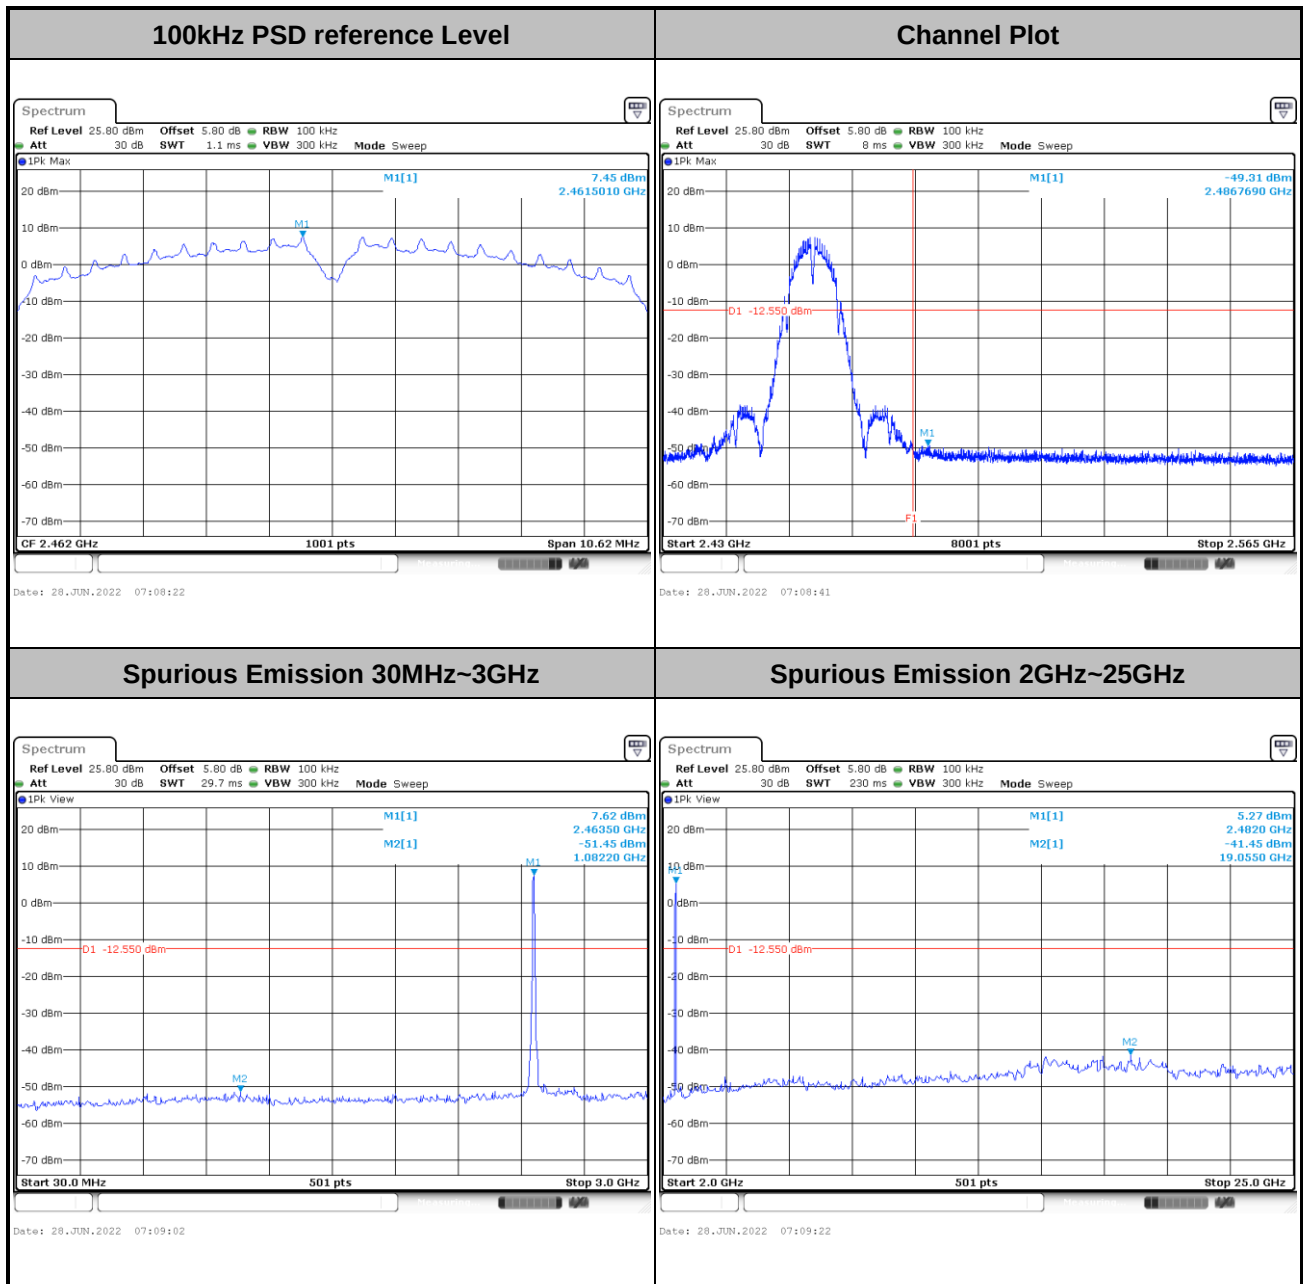




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

100kHz PSD reference Level

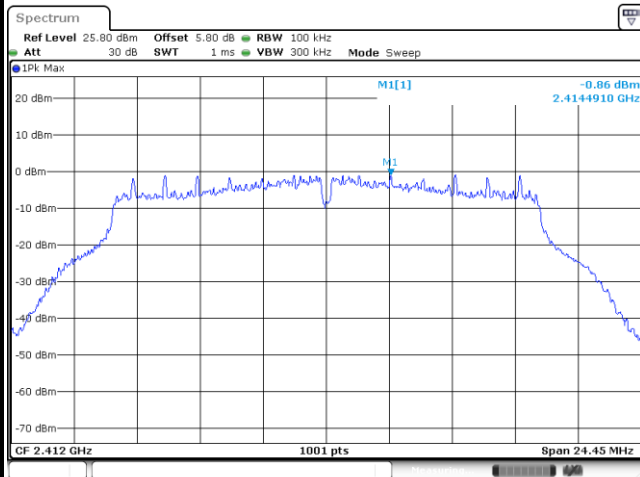


Date: 28.JUN.2022 07:12:56

Channel Plot

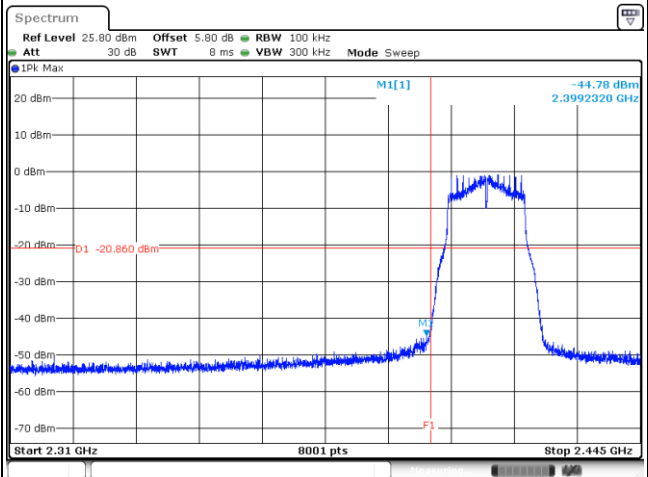


Date: 28.JUN.2022 07:13:15

Spurious Emission 30MHz~3GHz

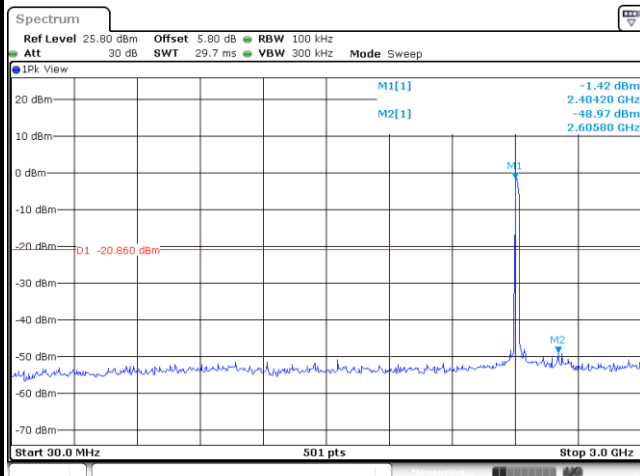

Date: 28.JUN.2022 07:13:36


Spurious Emission 2GHz~25GHz

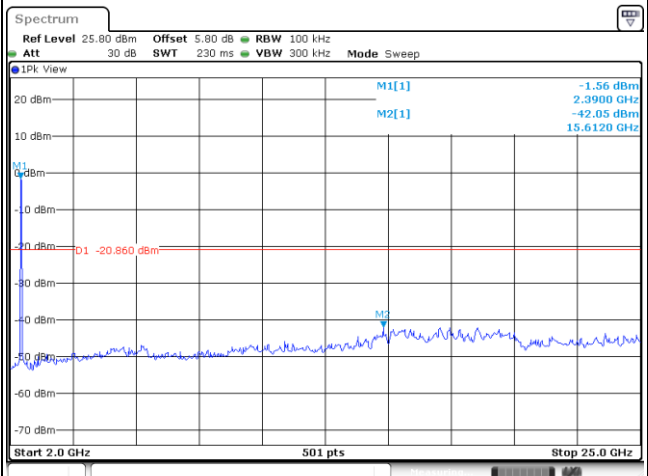

Date: 28.JUN.2022 07:13:56




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

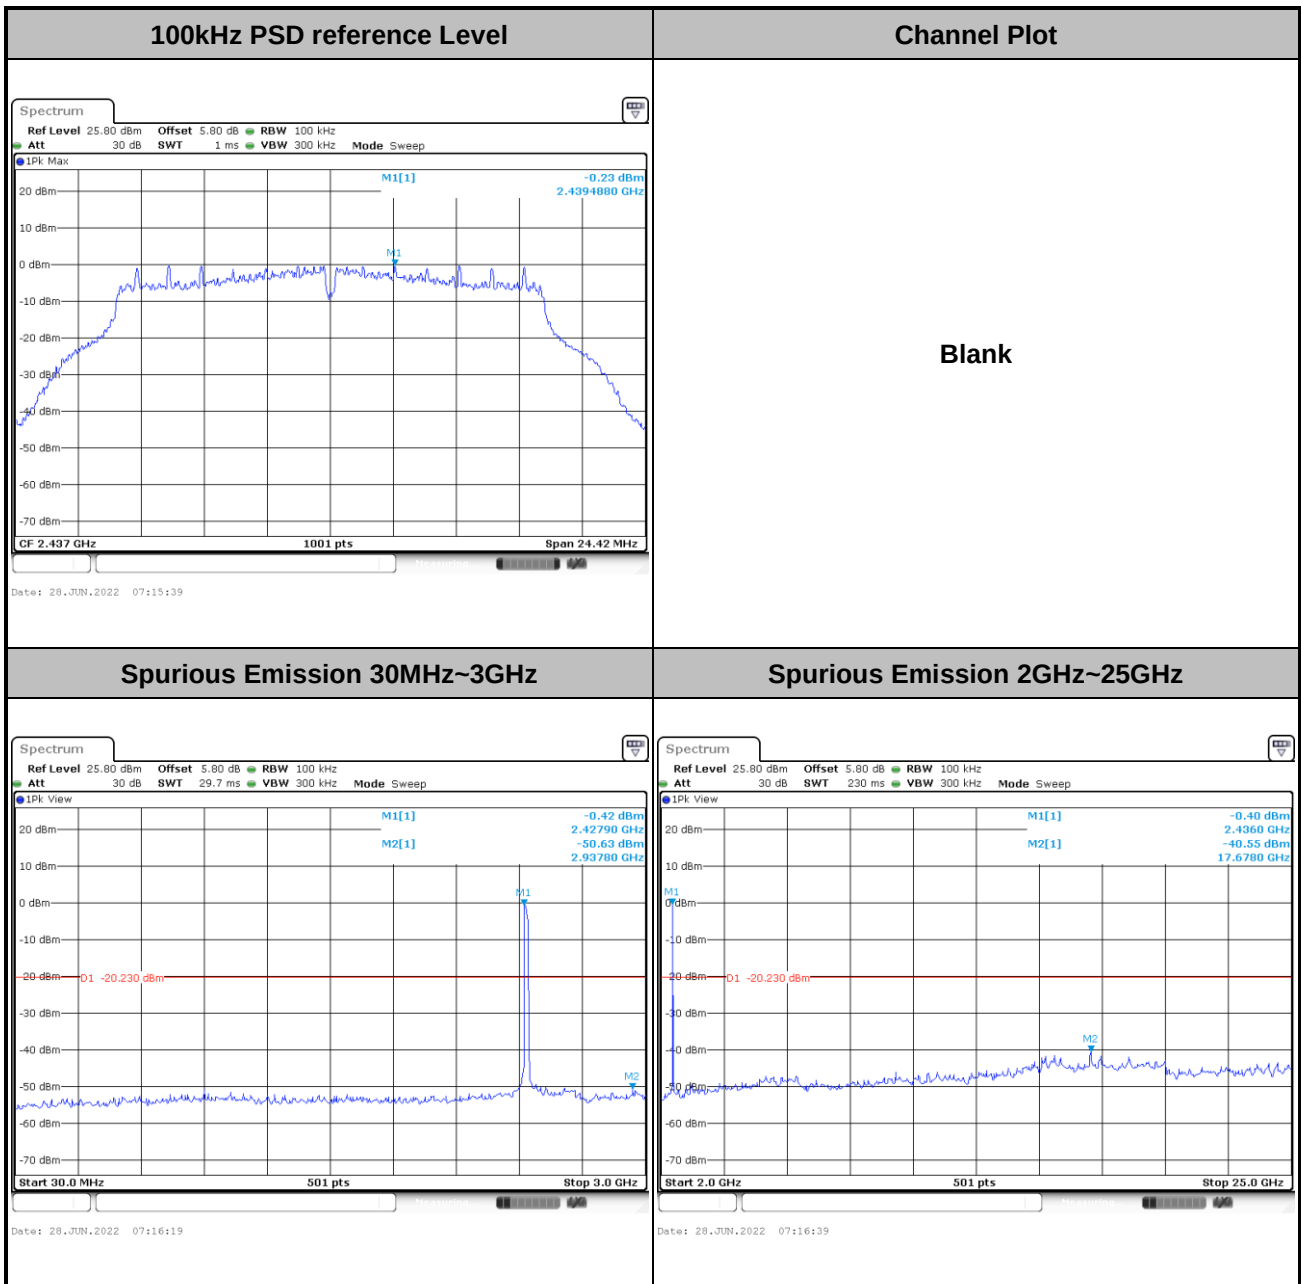




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----


100kHz PSD reference Level

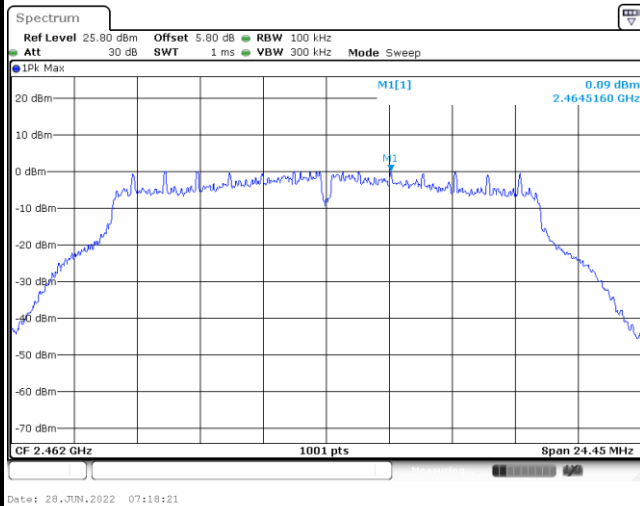


Channel Plot

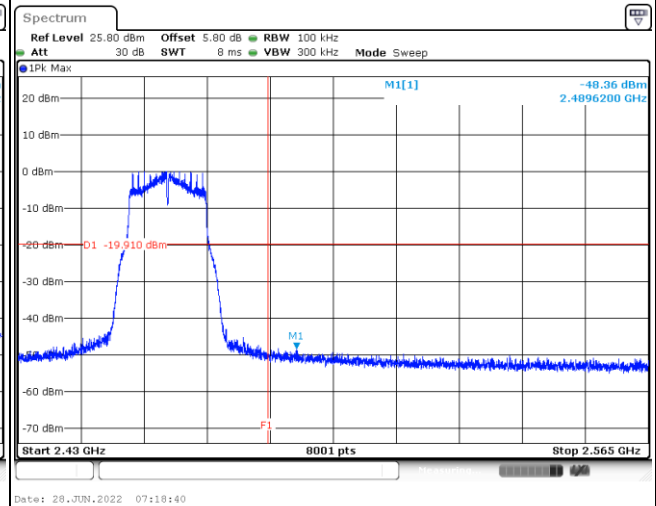

Spurious Emission 30MHz~3GHz

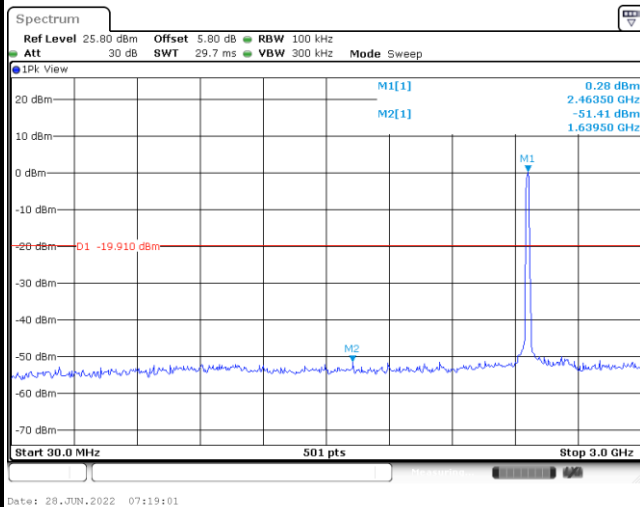

Spurious Emission 2GHz~25GHz

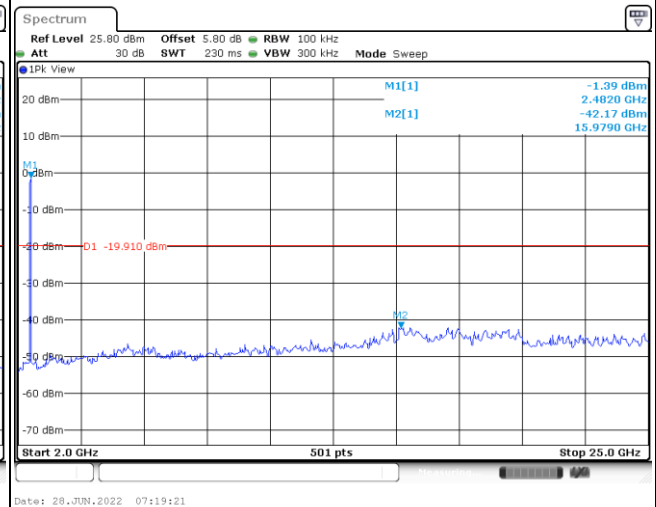





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

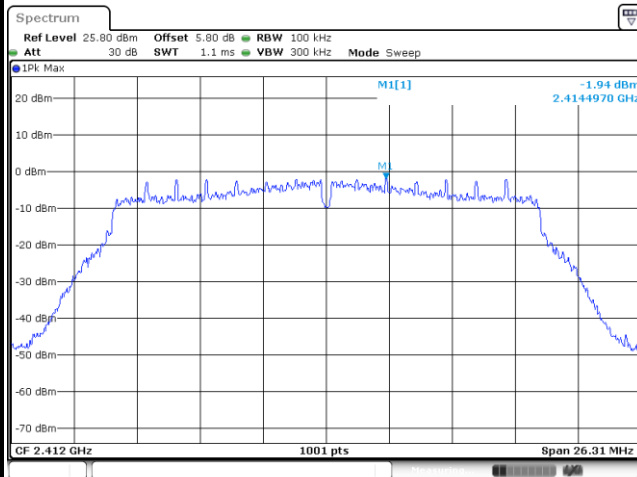


Channel Plot

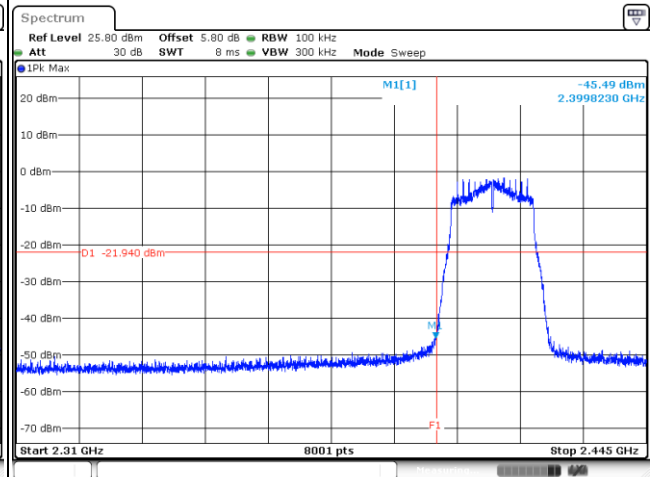

Spurious Emission 30MHz~3GHz

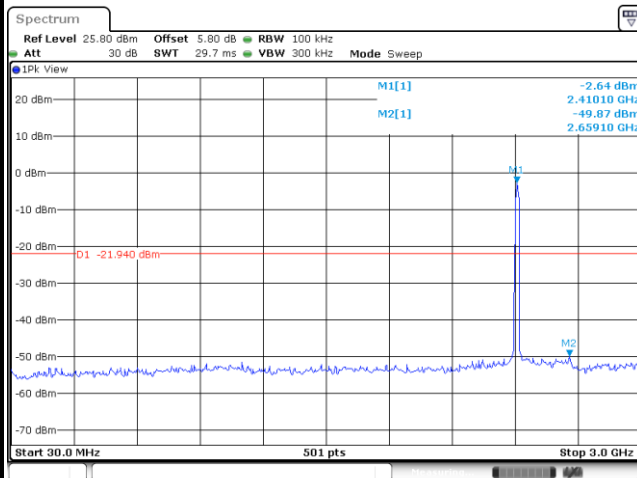


Spurious Emission 2GHz~25GHz

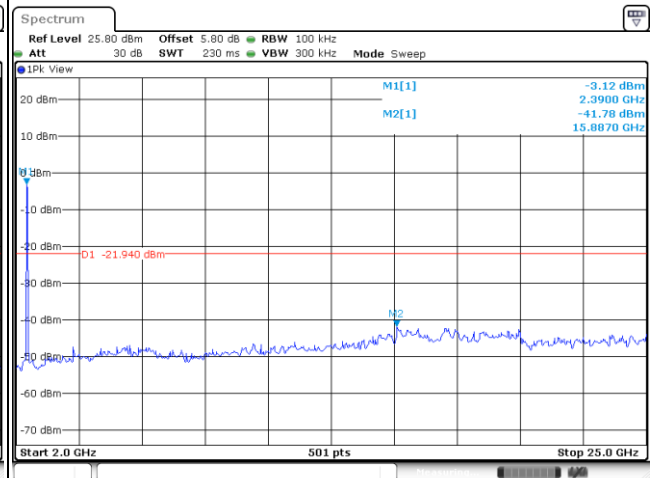



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

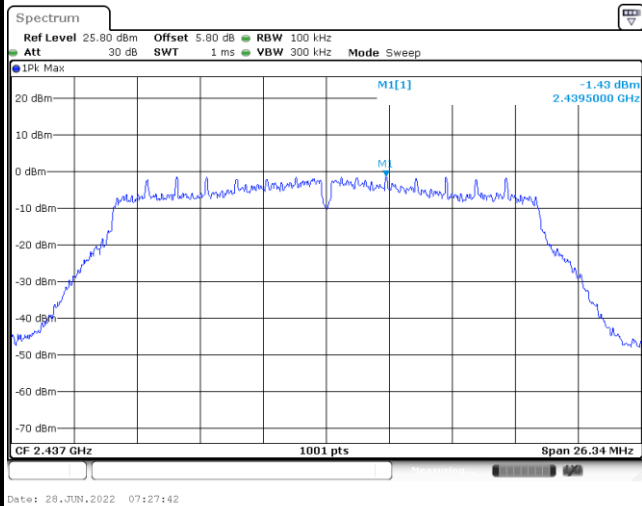


Channel Plot

Blank

Spurious Emission 30MHz~3GHz

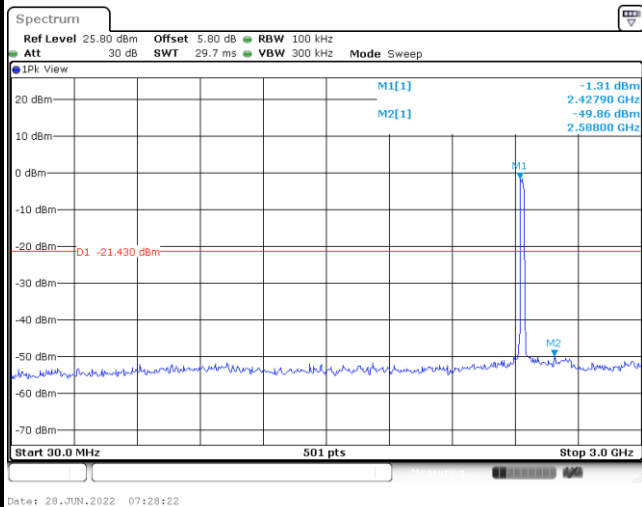

Spurious Emission 2GHz~25GHz

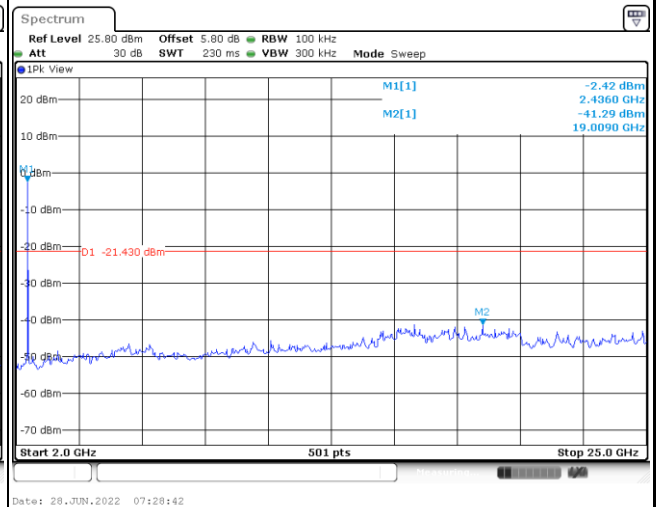





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

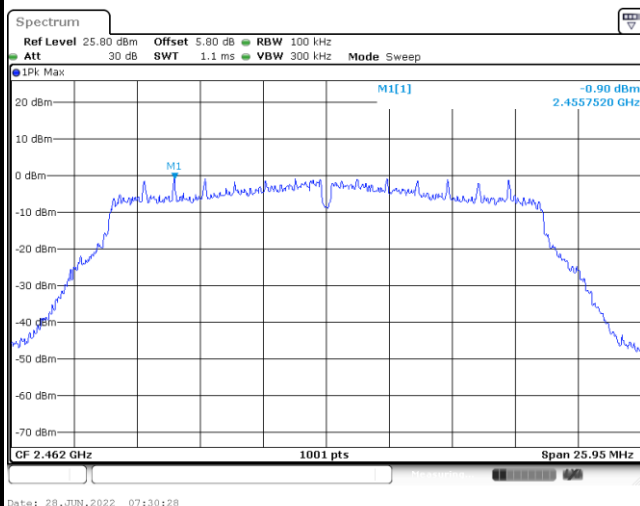


Channel Plot

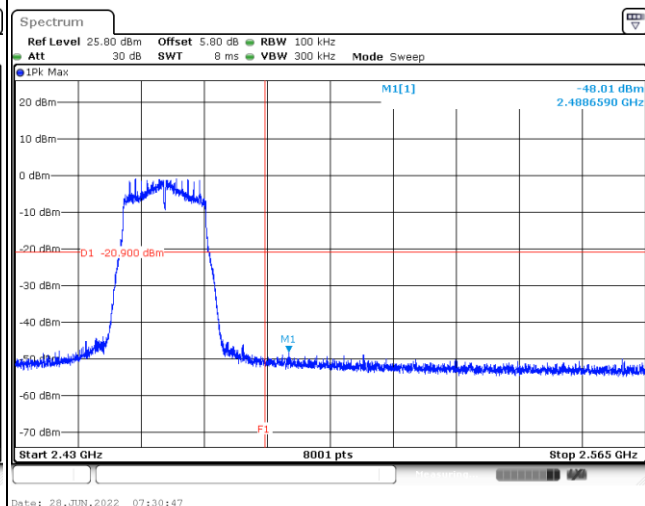

Spurious Emission 30MHz~3GHz

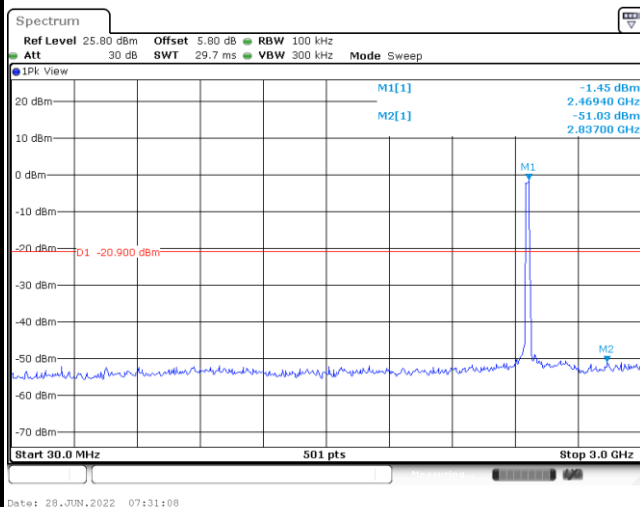

Spurious Emission 2GHz~25GHz

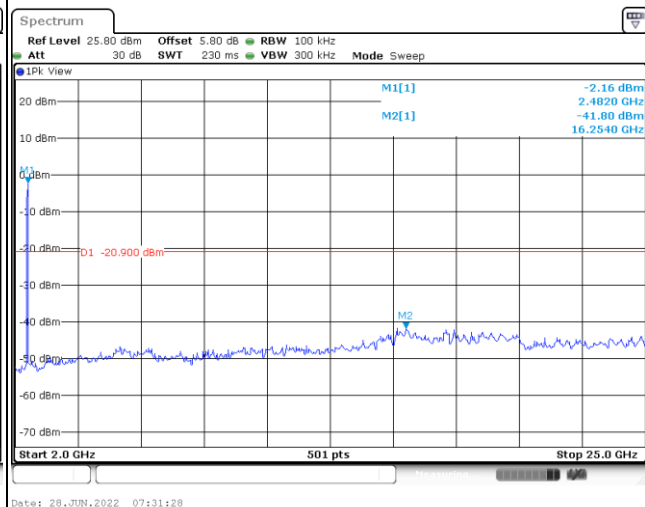

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

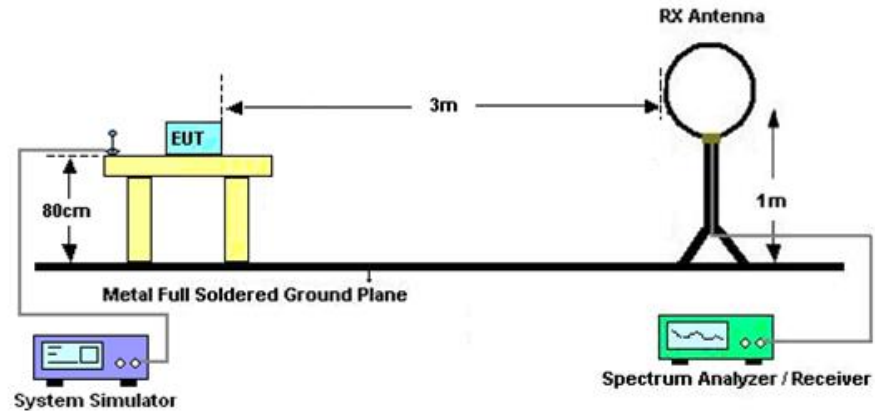

For radiated emissions from 30MHz to 1GHz

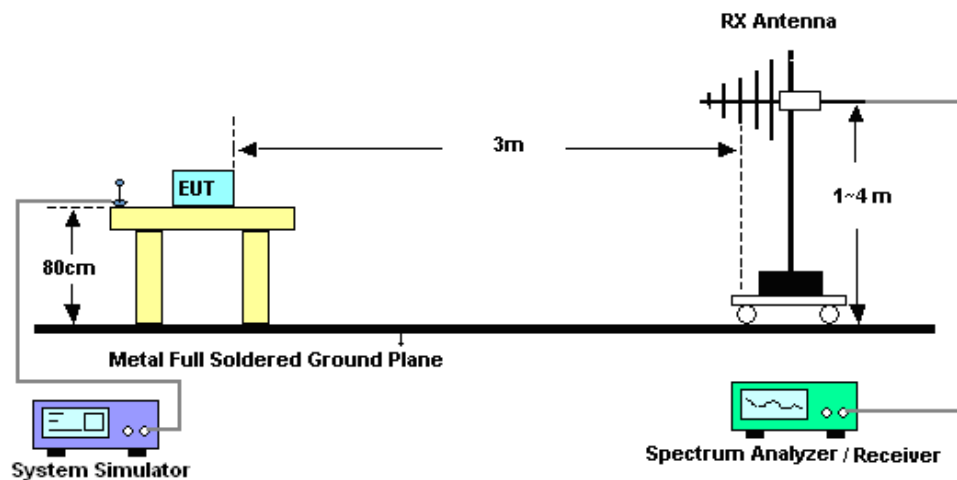

For radiated emissions above 1GHz

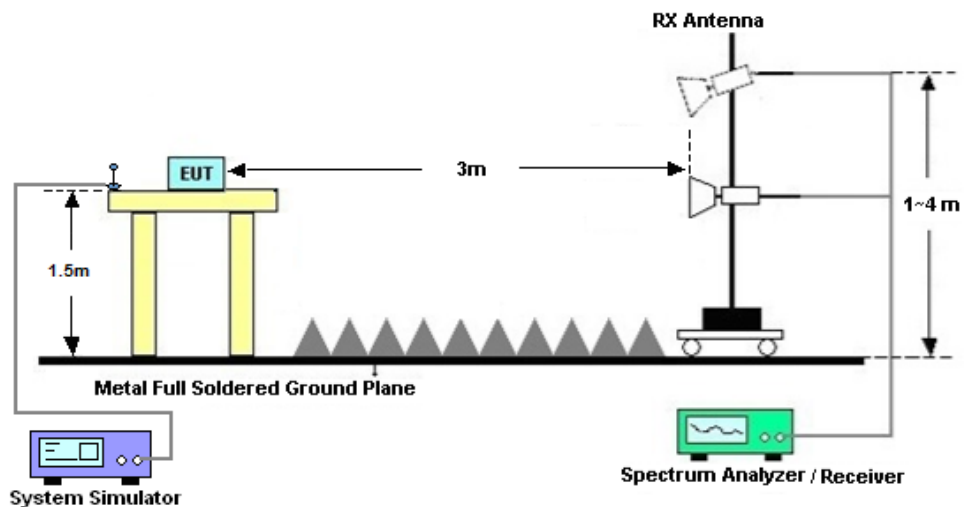



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jun. 28, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Jun. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Jun. 28, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 23, 2021	Jul. 28, 2022	Oct. 22, 2022	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 22, 2021	Jul. 28, 2022	Dec. 21, 2022	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	Jul. 28, 2022	Dec. 23, 2022	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Dec. 23, 2021	Jul. 28, 2022	Dec. 22, 2022	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102220	30MHz~1000MHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 05, 2022	Jul. 28, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-001 01800-30-10 P	2082394	1Ghz-18Ghz	Jan. 05, 2022	Jul. 28, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 14, 2021	Jul. 28, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 28, 2022	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Test Item	Uncertainty
Conducted Power	± 0.56 dB
Conducted Emissions	± 0.92 dB
Occupied Channel Bandwidth	± 0.03 %
Conducted Power Spectral Density	± 0.54 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0
--	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1
--	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1
--	-----

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	albert shi	Temperature:	21~25	°C
Test Date:	2022/6/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	11.04	-	7.06	-	0.50	Pass
11b	1Mbps	1	6	2437	11.14	-	7.08	-	0.50	Pass
11b	1Mbps	1	11	2462	11.14	-	7.08	-	0.50	Pass
11g	6Mbps	1	1	2412	18.13	-	16.30	-	0.50	Pass
11g	6Mbps	1	6	2437	18.13	-	16.28	-	0.50	Pass
11g	6Mbps	1	11	2462	18.13	-	16.30	-	0.50	Pass
HT20	MCS0	1	1	2412	18.88	-	17.54	-	0.50	Pass
HT20	MCS0	1	6	2437	18.83	-	17.56	-	0.50	Pass
HT20	MCS0	1	11	2462	18.88	-	17.30	-	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	16.95	-		30.00	-	3.264	-	20.214	-	36.00	-	Pass
11b	1Mbps	1	6	2437	17.51	-		30.00	-	3.264	-	20.774	-	36.00	-	Pass
11b	1Mbps	1	11	2462	18.16	-		30.00	-	3.264	-	21.424	-	36.00	-	Pass
11g	6Mbps	1	1	2412	22.29	-		30.00	-	3.264	-	25.554	-	36.00	-	Pass
11g	6Mbps	1	6	2437	22.43	-		30.00	-	3.264	-	25.694	-	36.00	-	Pass
11g	6Mbps	1	11	2462	22.88	-		30.00	-	3.264	-	26.144	-	36.00	-	Pass
HT20	MCS0	1	1	2412	20.52	-		30.00	-	3.264	-	23.784	-	36.00	-	Pass
HT20	MCS0	1	6	2437	21.33	-		30.00	-	3.264	-	24.594	-	36.00	-	Pass
HT20	MCS0	1	11	2462	21.99	-		30.00	-	3.264	-	25.254	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	
					Ant 1	Ant 2	Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2
11b	1Mbps	1	1	2412	0.07	-	13.88	-		3.264	-	17.144	-
11b	1Mbps	1	6	2437	0.07	-	14.44	-		3.264	-	17.704	-
11b	1Mbps	1	11	2462	0.07	-	15.11	-		3.264	-	18.374	-
11g	6Mbps	1	1	2412	0.30	-	11.25	-		3.264	-	14.514	-
11g	6Mbps	1	6	2437	0.30	-	11.69	-		3.264	-	14.954	-
11g	6Mbps	1	11	2462	0.30	-	12.14	-		3.264	-	15.404	-
HT20	MCS0	1	1	2412	0.34	-	10.03	-		3.264	-	13.294	-
HT20	MCS0	1	6	2437	0.34	-	10.65	-		3.264	-	13.914	-
HT20	MCS0	1	11	2462	0.34	-	11.02	-		3.264	-	14.284	-

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-7.46	-	-	3.264	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-6.61	-		3.264	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-6.13	-		3.264	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-12.00	-		3.264	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-11.16	-		3.264	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-10.81	-		3.264	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-13.80	-		3.264	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-13.05	-		3.264	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-12.28	-		3.264	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	22 ~ 23℃
		Temperature :	41 ~ 42%

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2387.35	45.63	54.00	-8.37	V	AVERAGE	Pass	Band Edge
2	802.11b	06	7311.00	41.88	74.00	-32.12	H	PEAK	Pass	Harmonic
3	802.11b	11	2483.51	46.32	54.00	-7.68	H	AVERAGE	Pass	Band Edge
4	802.11g	01	2387.22	46.21	54.00	-7.79	H	AVERAGE	Pass	Band Edge
5	802.11g	06	7311.00	42.23	74.00	-31.77	H	PEAK	Pass	Harmonic
6	802.11g	11	2488.45	46.91	54.00	-7.09	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	2389.95	46.10	54.00	-7.90	H	AVERAGE	Pass	Band Edge
8	802.11n HT20	06	7311.00	41.39	74.00	-32.61	H	PEAK	Pass	Harmonic
9	802.11n HT20	11	2487.92	46.86	54.00	-7.14	H	AVERAGE	Pass	Band Edge

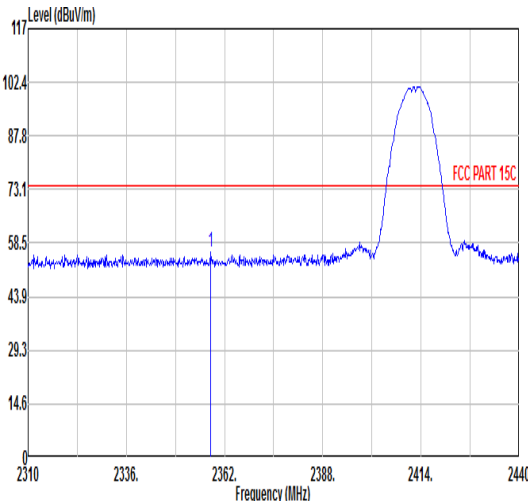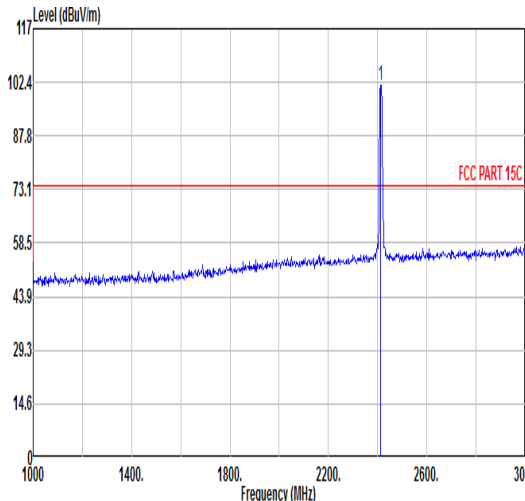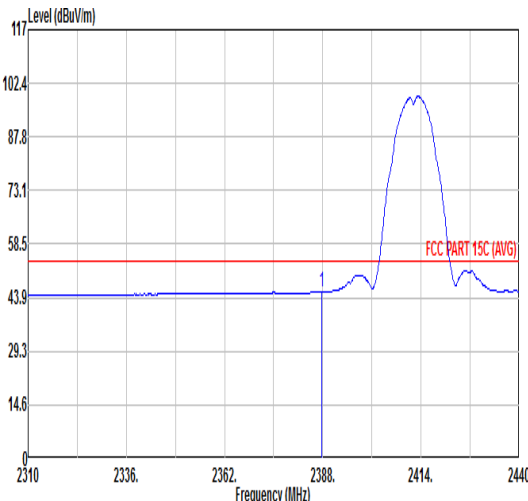
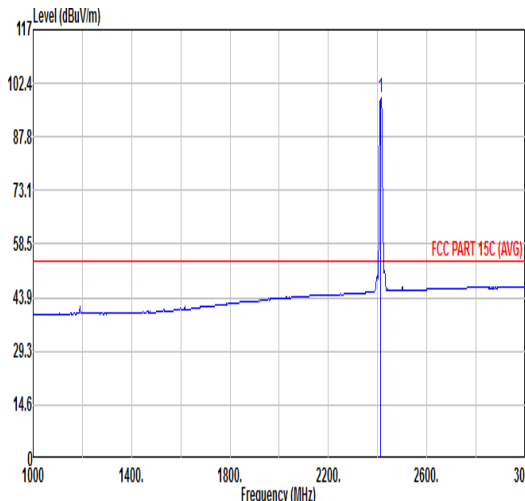


Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2358.36</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>43.78</td><td>31.90</td><td>7.11</td><td>32.88</td><td>6.00</td><td>178</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2358.36	55.91	74.00	-18.09	43.78	31.90	7.11	32.88	6.00	178	360	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.55</td><td>-----</td><td>-----</td><td>89.16</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>178</td><td>360</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.55	-----	-----	89.16	32.02	7.21	32.84	6.00	178	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2358.36	55.91	74.00	-18.09	43.78	31.90	7.11	32.88	6.00	178	360	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.55	-----	-----	89.16	32.02	7.21	32.84	6.00	178	360	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.61</td><td>45.59</td><td>54.00</td><td>-8.41</td><td>33.32</td><td>31.96</td><td>7.16</td><td>32.85</td><td>6.00</td><td>178</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.61	45.59	54.00	-8.41	33.32	31.96	7.16	32.85	6.00	178	360	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.67</td><td>-----</td><td>-----</td><td>86.28</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>178</td><td>360</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.67	-----	-----	86.28	32.02	7.21	32.84	6.00	178	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.61	45.59	54.00	-8.41	33.32	31.96	7.16	32.85	6.00	178	360	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	98.67	-----	-----	86.28	32.02	7.21	32.84	6.00	178	360	AVERAGE																																																																																							

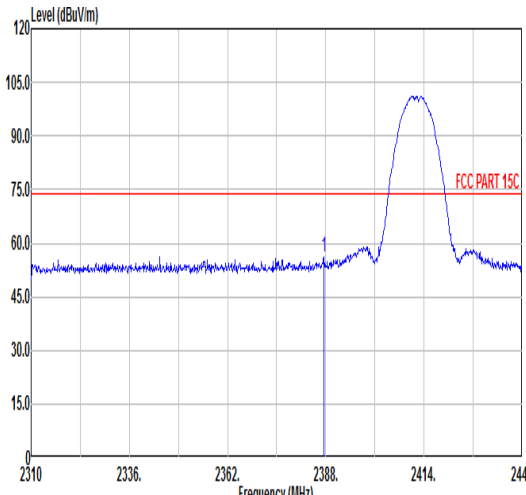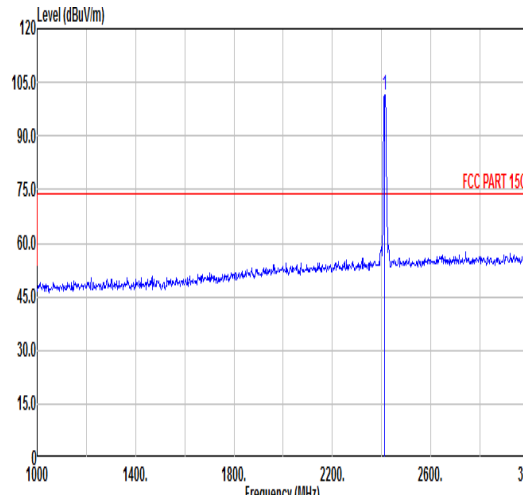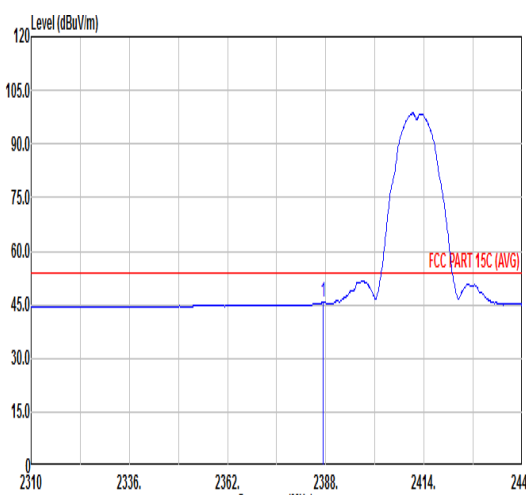
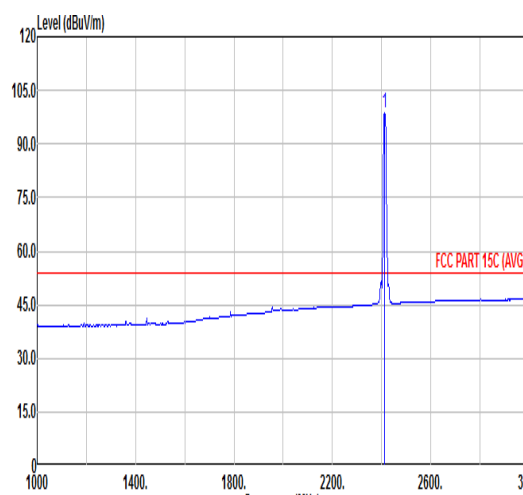


		1																																																																																																													
Mode		Band Edge																																																																																																													
		2400-2483.5_802.11b_CH01_2412MHz																																																																																																													
ANT		SISO																																																																																																													
Pol.		Vertical						Fundamental																																																																																																							
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.48</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>43.71</td><td>31.96</td><td>7.16</td><td>32.85</td><td>6.00</td><td>106</td><td>222</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	55.98	74.00	-18.02	43.71	31.96	7.16	32.85	6.00	106	222	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.47</td><td>-----</td><td>-----</td><td>89.10</td><td>32.01</td><td>7.20</td><td>32.84</td><td>6.00</td><td>106</td><td>222</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.47	-----	-----	89.10	32.01	7.20	32.84	6.00	106	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2387.48	55.98	74.00	-18.02	43.71	31.96	7.16	32.85	6.00	106	222	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	101.47	-----	-----	89.10	32.01	7.20	32.84	6.00	106	222	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.35</td><td>45.63</td><td>54.00</td><td>-8.37</td><td>33.36</td><td>31.96</td><td>7.16</td><td>32.85</td><td>6.00</td><td>106</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.35	45.63	54.00	-8.37	33.36	31.96	7.16	32.85	6.00	106	222	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.51</td><td>-----</td><td>-----</td><td>86.14</td><td>32.01</td><td>7.20</td><td>32.84</td><td>6.00</td><td>106</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.51	-----	-----	86.14	32.01	7.20	32.84	6.00	106	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2387.35	45.63	54.00	-8.37	33.36	31.96	7.16	32.85	6.00	106	222	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	98.51	-----	-----	86.14	32.01	7.20	32.84	6.00	106	222	AVERAGE																																																																																																			



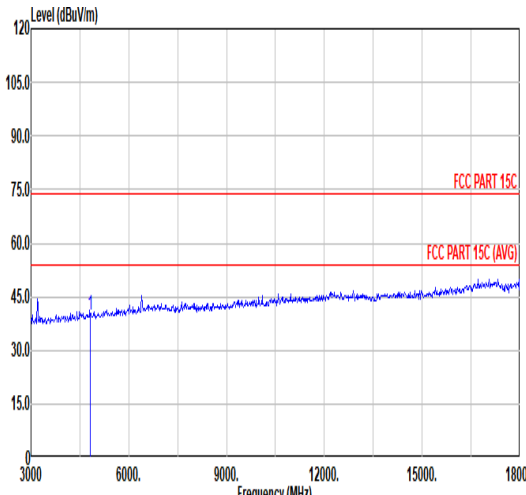
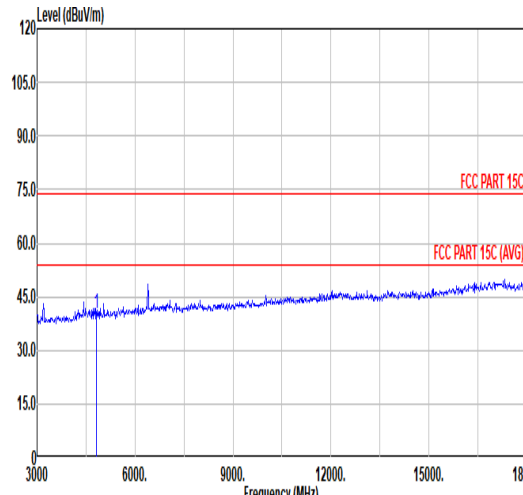


Mode	1																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	SISO																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>60.93</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>158</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.05	74.00	-33.95	60.93	34.09	10.29	65.26	0.00	158	0 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.45</td><td>74.00</td><td>-33.55</td><td>61.33</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>300</td><td>220 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.45	74.00	-33.55	61.33	34.09	10.29	65.26	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	40.05	74.00	-33.95	60.93	34.09	10.29	65.26	0.00	158	0 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	40.45	74.00	-33.55	61.33	34.09	10.29	65.26	0.00	300	220 PEAK																																																																																						



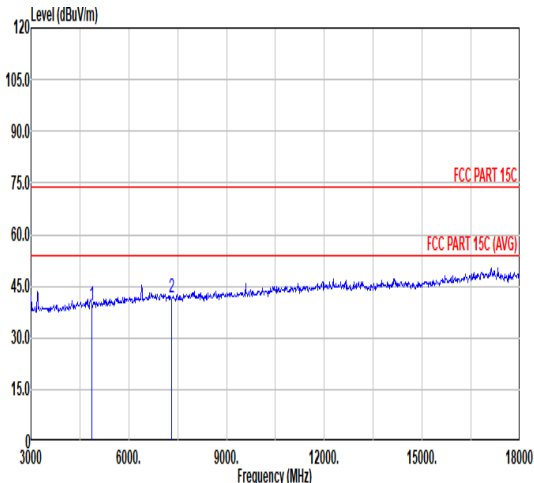
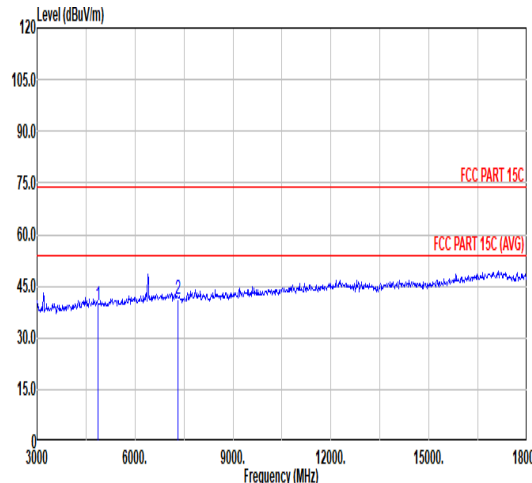


Mode	2																																																							
	Harmonic																																																							
	2400-2483.5_802.11b_CH06_2437MHz																																																							
ANT	SISO																																																							
Pol.	Horizontal																																																							
Peak Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>60.12</td><td>34.12</td><td>10.34</td><td>65.27</td></tr><tr><td>2</td><td>7311.00</td><td>41.88</td><td>74.00</td><td>-32.12</td><td>59.05</td><td>35.41</td><td>12.78</td><td>65.36</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	39.31	74.00	-34.69	60.12	34.12	10.34	65.27	2	7311.00	41.88	74.00	-32.12	59.05	35.41	12.78	65.36
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	4874.00	39.31	74.00	-34.69	60.12	34.12	10.34	65.27																																																
2	7311.00	41.88	74.00	-32.12	59.05	35.41	12.78	65.36																																																
Pol.	Vertical																																																							
Peak Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>39.44</td><td>74.00</td><td>-34.56</td><td>60.25</td><td>34.12</td><td>10.34</td><td>65.27</td></tr><tr><td>2</td><td>7311.00</td><td>41.43</td><td>74.00</td><td>-32.57</td><td>58.60</td><td>35.41</td><td>12.78</td><td>65.36</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	39.44	74.00	-34.56	60.25	34.12	10.34	65.27	2	7311.00	41.43	74.00	-32.57	58.60	35.41	12.78	65.36
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																
1	4874.00	39.44	74.00	-34.56	60.25	34.12	10.34	65.27																																																
2	7311.00	41.43	74.00	-32.57	58.60	35.41	12.78	65.36																																																

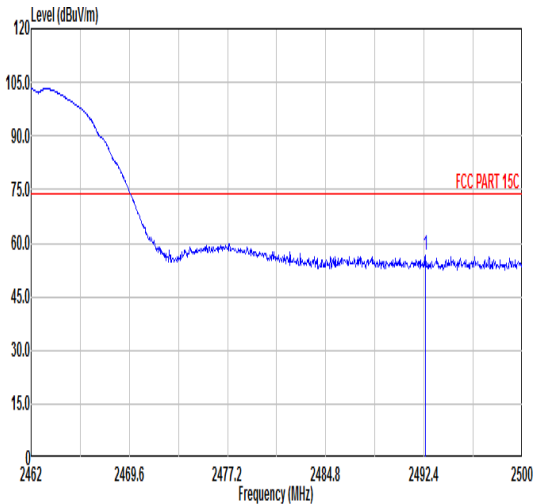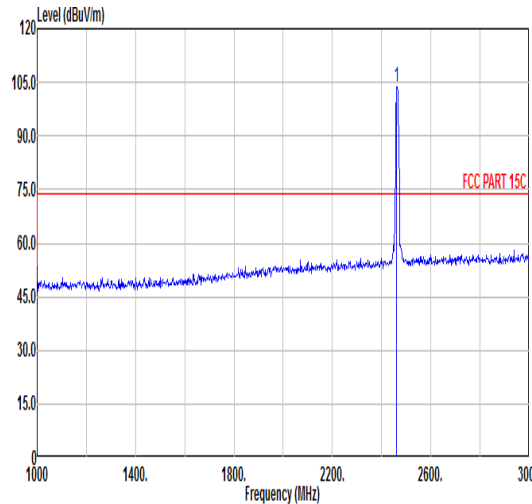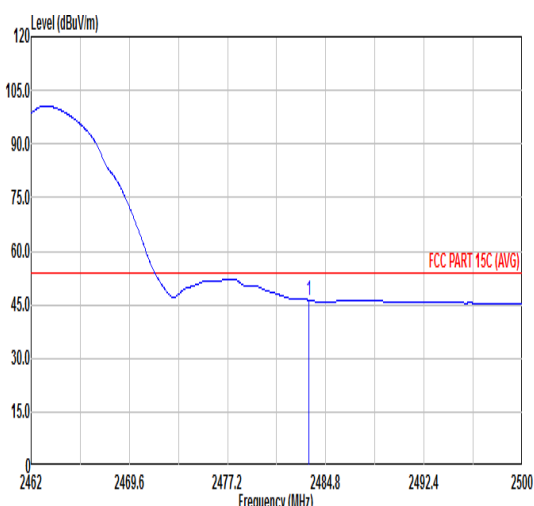
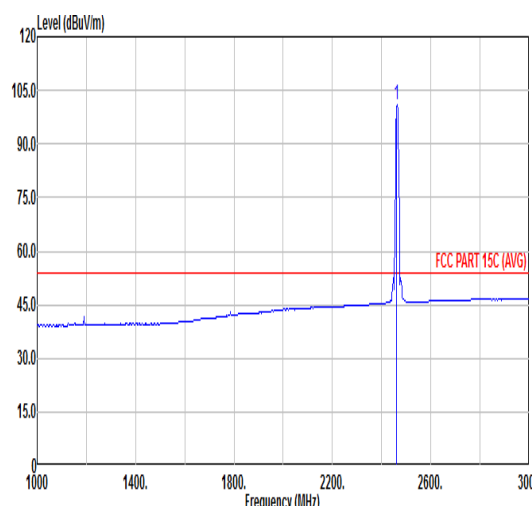


Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
ANT	SISO																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.51</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>43.69</td><td>32.18</td><td>7.35</td><td>32.81</td><td>6.00</td><td>100</td><td>339</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.51	56.41	74.00	-17.59	43.69	32.18	7.35	32.81	6.00	100	339
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2492.51	56.41	74.00	-17.59	43.69	32.18	7.35	32.81	6.00	100	339	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.74</td><td>-----</td><td>-----</td><td>91.14</td><td>32.12</td><td>7.30</td><td>32.82</td><td>6.00</td><td>100</td><td>339</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.74	-----	-----	91.14	32.12	7.30	32.82	6.00	100	339
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	103.74	-----	-----	91.14	32.12	7.30	32.82	6.00	100	339	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>46.32</td><td>54.00</td><td>-7.68</td><td>33.65</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>100</td><td>339</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	46.32	54.00	-7.68	33.65	32.16	7.33	32.82	6.00	100	339
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.51	46.32	54.00	-7.68	33.65	32.16	7.33	32.82	6.00	100	339	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.80</td><td>-----</td><td>-----</td><td>88.20</td><td>32.12</td><td>7.30</td><td>32.82</td><td>6.00</td><td>100</td><td>339</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.80	-----	-----	88.20	32.12	7.30	32.82	6.00	100	339
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	100.80	-----	-----	88.20	32.12	7.30	32.82	6.00	100	339	AVERAGE																																											

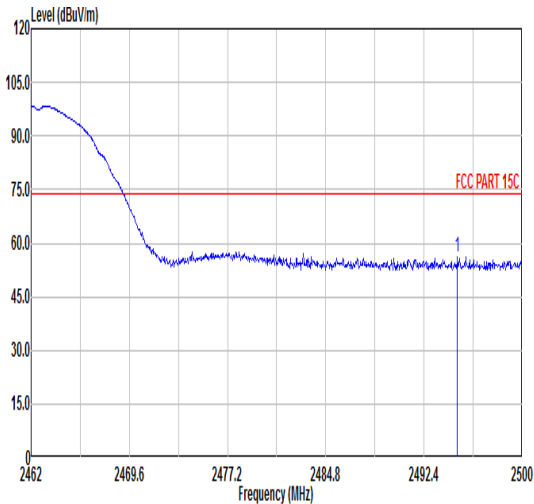
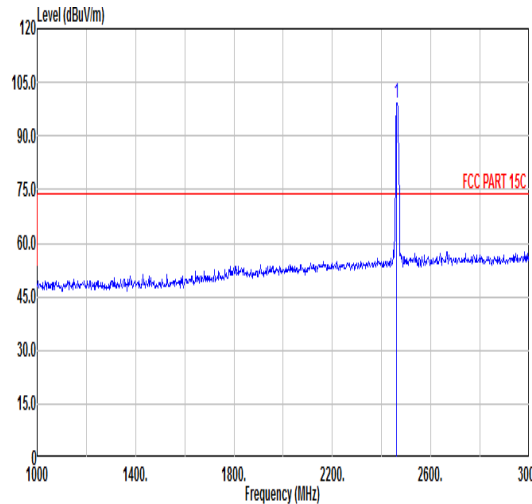
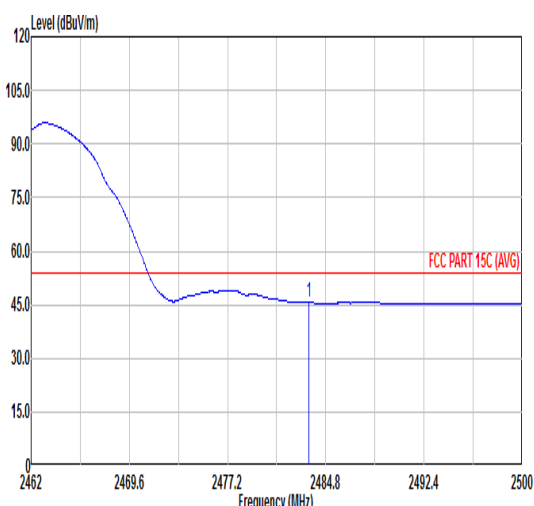
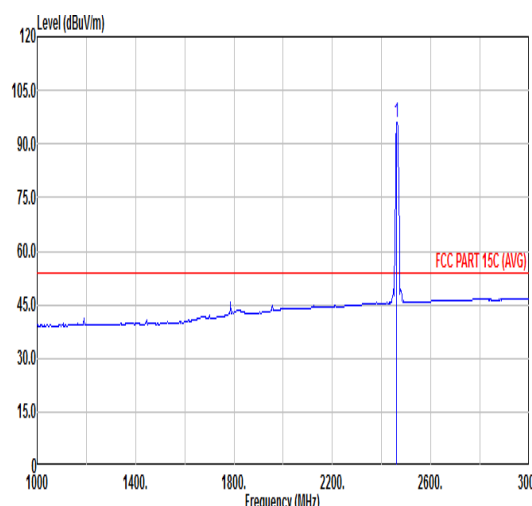


		3																																																																																																
Mode		Band Edge																																																																																																
		2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT		SISO																																																																																																
Pol.	Vertical											Fundamental																																																																																						
Peak																																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2494.98	56.06	74.00	-17.94	43.34	32.18	7.35	32.81	6.00	256	340	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.13</td><td>-----</td><td>-----</td><td>86.55</td><td>32.11</td><td>7.29</td><td>32.82</td><td>6.00</td><td>256</td><td>340</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	99.13	-----	-----	86.55	32.11	7.29	32.82	6.00	256	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2494.98	56.06	74.00	-17.94	43.34	32.18	7.35	32.81	6.00	256	340	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2462.00	99.13	-----	-----	86.55	32.11	7.29	32.82	6.00	256	340	PEAK																																																																																						
Avg																																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	45.66	54.00	-8.34	32.99	32.16	7.33	32.82	6.00	256	340	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.17</td><td>-----</td><td>-----</td><td>83.59</td><td>32.11</td><td>7.29</td><td>32.82</td><td>6.00</td><td>256</td><td>340</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	96.17	-----	-----	83.59	32.11	7.29	32.82	6.00	256	340
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2483.51	45.66	54.00	-8.34	32.99	32.16	7.33	32.82	6.00	256	340	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1	2462.00	96.17	-----	-----	83.59	32.11	7.29	32.82	6.00	256	340	AVERAGE																																																																																						



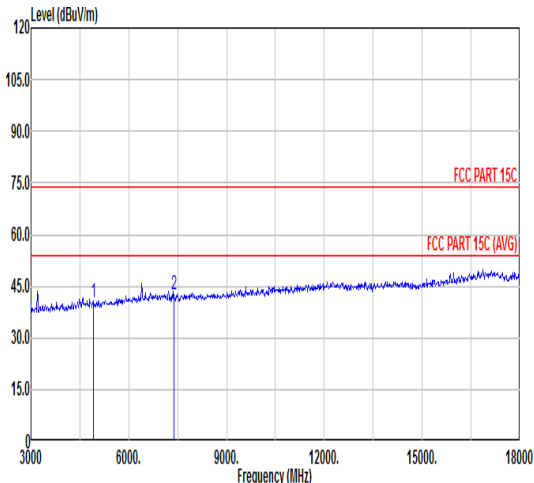
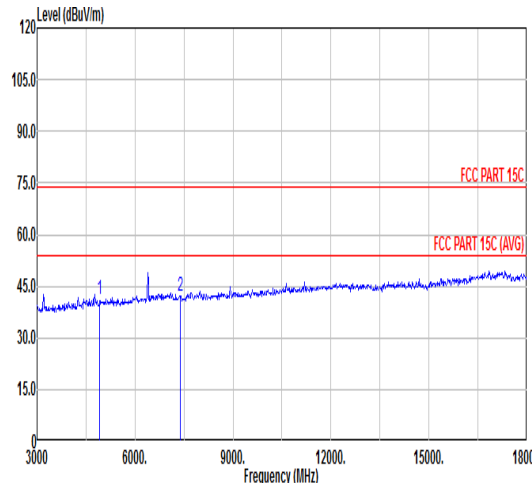


Mode	3																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																																							
ANT	SISO																																																																																																																																																							
Pol.	Horizontal												Vertical																																																																																																																																											
Peak Avg																																																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="4">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1 4924.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>60.89</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>300</td><td>44</td><td>PEAK</td><td colspan="2"></td></tr><tr><td>2 7386.00</td><td>42.60</td><td>74.00</td><td>-31.40</td><td>59.86</td><td>35.42</td><td>12.88</td><td>65.56</td><td>0.00</td><td>300</td><td>53</td><td>PEAK</td><td colspan="2"></td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos					Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1 4924.00	40.18	74.00	-33.82	60.89	34.16	10.40	65.27	0.00	300	44	PEAK			2 7386.00	42.60	74.00	-31.40	59.86	35.42	12.88	65.56	0.00	300	53	PEAK			<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="4"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="4">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="3"></th></tr></thead><tbody><tr><td>1 4924.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>62.12</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>289</td><td>360</td><td>PEAK</td><td colspan="2"></td></tr><tr><td>2 7386.00</td><td>41.92</td><td>74.00</td><td>-32.08</td><td>59.18</td><td>35.42</td><td>12.88</td><td>65.56</td><td>0.00</td><td>100</td><td>19</td><td>PEAK</td><td colspan="2"></td></tr></tbody></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos					Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1 4924.00	41.41	74.00	-32.59	62.12	34.16	10.40	65.27	0.00	289	360	PEAK			2 7386.00	41.92	74.00	-32.08	59.18	35.42	12.88	65.56	0.00	100	19	PEAK		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1 4924.00	40.18	74.00	-33.82	60.89	34.16	10.40	65.27	0.00	300	44	PEAK																																																																																																																																													
2 7386.00	42.60	74.00	-31.40	59.86	35.42	12.88	65.56	0.00	300	53	PEAK																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1 4924.00	41.41	74.00	-32.59	62.12	34.16	10.40	65.27	0.00	289	360	PEAK																																																																																																																																													
2 7386.00	41.92	74.00	-32.08	59.18	35.42	12.88	65.56	0.00	100	19	PEAK																																																																																																																																													

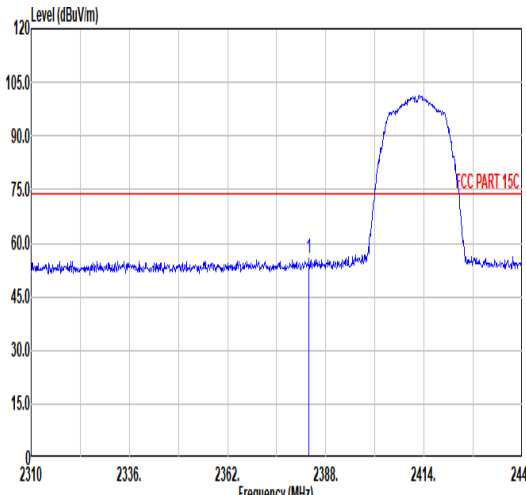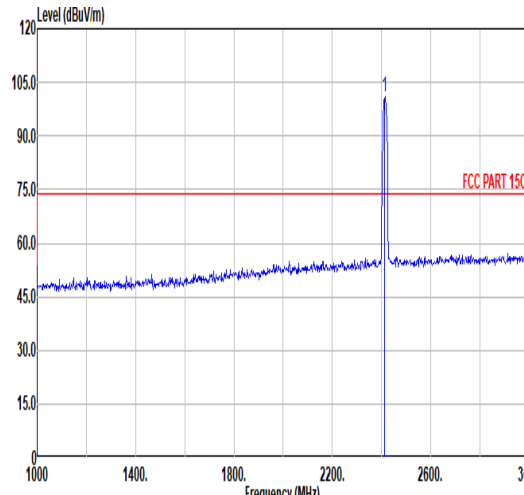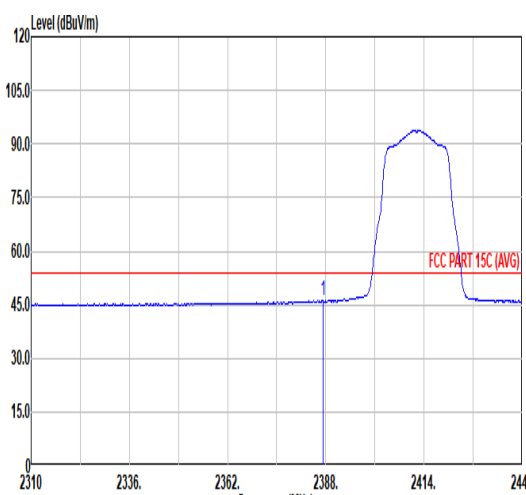
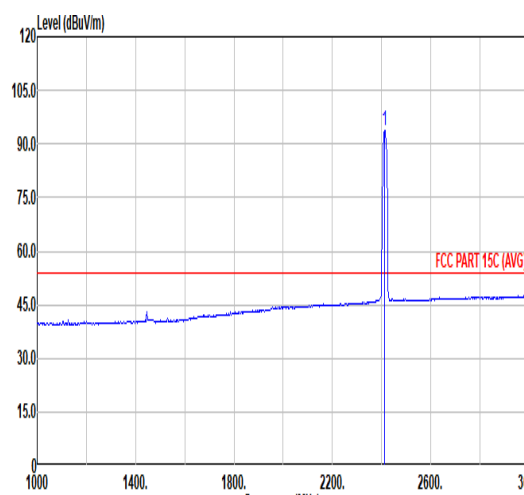


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.58</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>43.45</td><td>31.96</td><td>7.15</td><td>32.85</td><td>6.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.58	55.71	74.00	-18.29	43.45	31.96	7.15	32.85	6.00	100	219	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.08</td><td>-----</td><td>-----</td><td>88.69</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.08	-----	-----	88.69	32.02	7.21	32.84	6.00	100	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2383.58	55.71	74.00	-18.29	43.45	31.96	7.15	32.85	6.00	100	219	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.08	-----	-----	88.69	32.02	7.21	32.84	6.00	100	219	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.22</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>33.94</td><td>31.96</td><td>7.16</td><td>32.85</td><td>6.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.22	46.21	54.00	-7.79	33.94	31.96	7.16	32.85	6.00	100	219	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.83</td><td>-----</td><td>-----</td><td>81.44</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.83	-----	-----	81.44	32.02	7.21	32.84	6.00	100	219
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.22	46.21	54.00	-7.79	33.94	31.96	7.16	32.85	6.00	100	219	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	93.83	-----	-----	81.44	32.02	7.21	32.84	6.00	100	219	AVERAGE																																																																																							

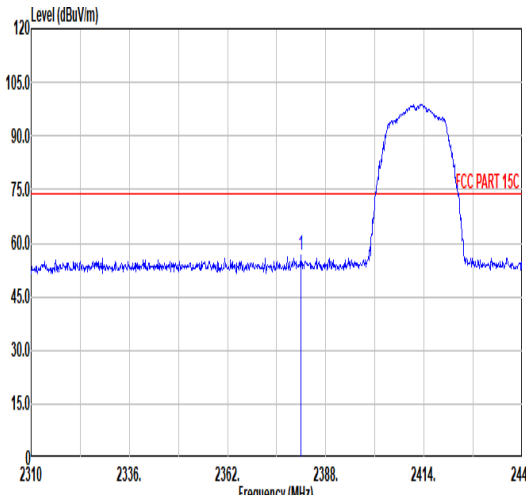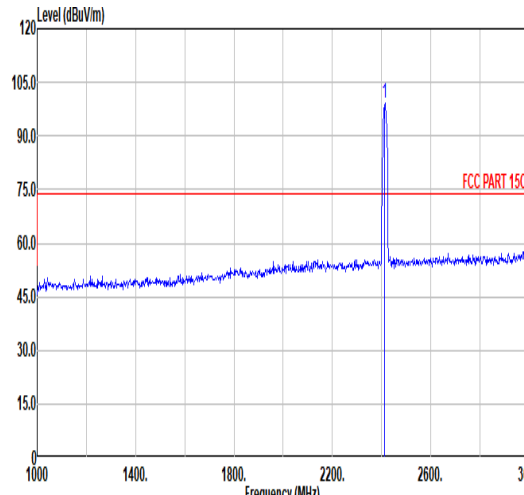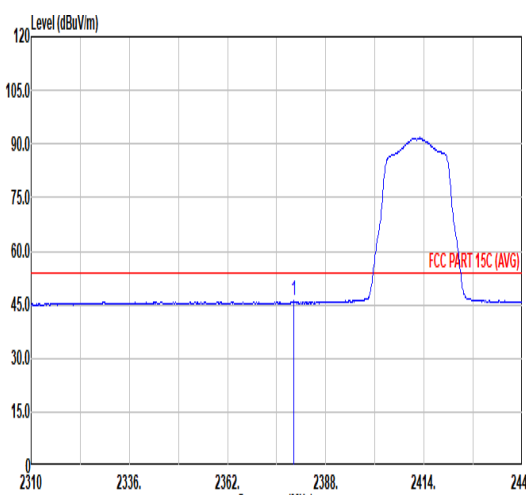
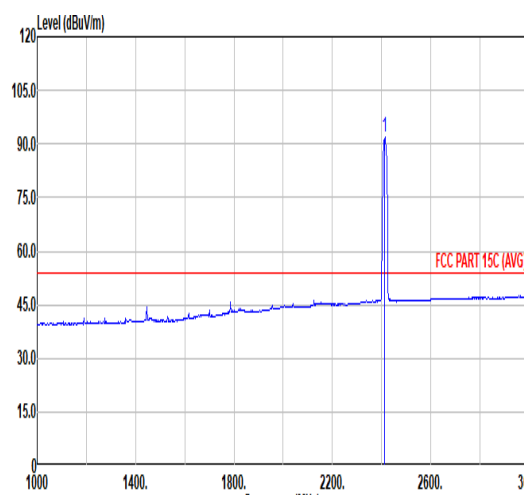


Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.50</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>44.22</td><td>31.95</td><td>7.15</td><td>32.86</td><td>6.00</td><td>300</td><td>204</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.50	56.46	74.00	-17.54	44.22	31.95	7.15	32.86	6.00	300	204	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.95</td><td>-----</td><td>-----</td><td>86.56</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>300</td><td>204</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.95	-----	-----	86.56	32.02	7.21	32.84	6.00	300	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2381.50	56.46	74.00	-17.54	44.22	31.95	7.15	32.86	6.00	300	204	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	98.95	-----	-----	86.56	32.02	7.21	32.84	6.00	300	204	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.42</td><td>46.00</td><td>54.00</td><td>-8.00</td><td>33.76</td><td>31.95</td><td>7.15</td><td>32.86</td><td>6.00</td><td>300</td><td>204</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.42	46.00	54.00	-8.00	33.76	31.95	7.15	32.86	6.00	300	204	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>91.77</td><td>-----</td><td>-----</td><td>79.38</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>300</td><td>204</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.77	-----	-----	79.38	32.02	7.21	32.84	6.00	300	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2379.42	46.00	54.00	-8.00	33.76	31.95	7.15	32.86	6.00	300	204	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	91.77	-----	-----	79.38	32.02	7.21	32.84	6.00	300	204	AVERAGE																																																																																							



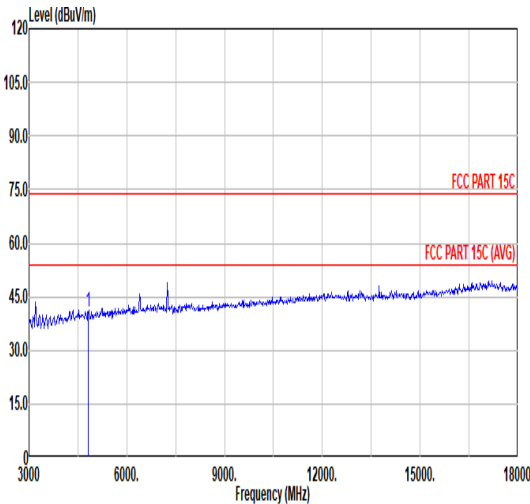
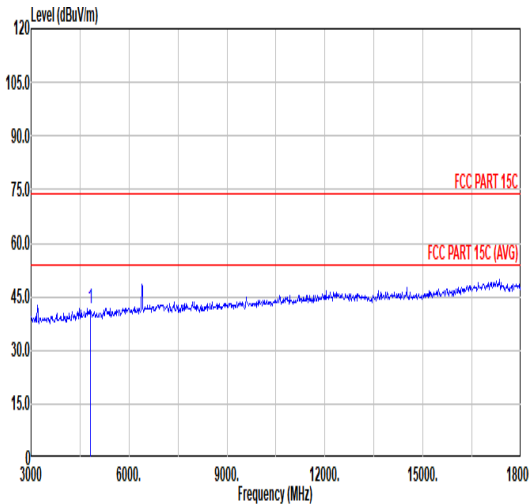


Mode	4																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>40.70</td><td>74.00</td><td>-33.30</td><td>61.58</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.70	74.00	-33.30	61.58	34.09	10.29	65.26	0.00	300	0	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>62.50</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>300</td><td>210</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.62	74.00	-32.38	62.50	34.09	10.29	65.26	0.00	300	210	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	40.70	74.00	-33.30	61.58	34.09	10.29	65.26	0.00	300	0	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	41.62	74.00	-32.38	62.50	34.09	10.29	65.26	0.00	300	210	PEAK																																																																																								



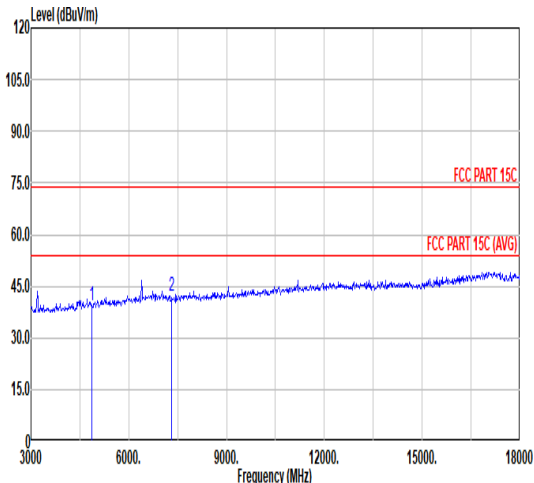
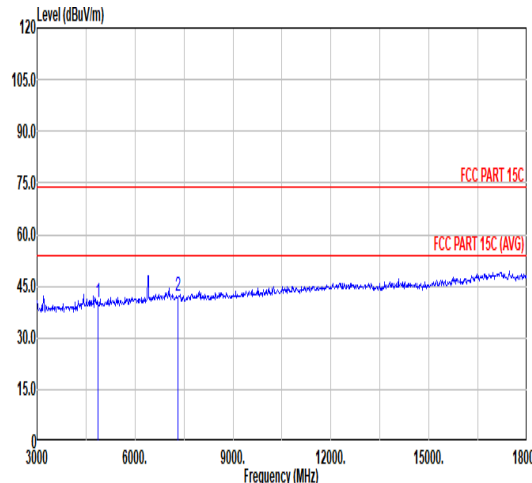


Mode	5																																																																									
	Harmonic																																																																									
	2400-2483.5_802.11g_CH06_2437MHz																																																																									
ANT	SISO																																																																									
Pol.	Horizontal																																																																									
Peak Avg																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>39.46</td><td>74.00</td><td>-34.54</td><td>60.27</td><td>34.12</td><td>10.34</td><td>65.27</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>59.40</td><td>35.41</td><td>12.78</td><td>65.36</td><td>0.00</td><td>300</td><td>360</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	39.46	74.00	-34.54	60.27	34.12	10.34	65.27	0.00	100	0	PEAK	2	7311.00	42.23	74.00	-31.77	59.40	35.41	12.78	65.36	0.00	300	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																	
	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																															
1	4874.00	39.46	74.00	-34.54	60.27	34.12	10.34	65.27	0.00	100	0	PEAK																																																														
2	7311.00	42.23	74.00	-31.77	59.40	35.41	12.78	65.36	0.00	300	360	PEAK																																																														
																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>40.09</td><td>74.00</td><td>-33.91</td><td>60.90</td><td>34.12</td><td>10.34</td><td>65.27</td><td>0.00</td><td>300</td><td>89</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>41.99</td><td>74.00</td><td>-32.01</td><td>59.16</td><td>35.41</td><td>12.78</td><td>65.36</td><td>0.00</td><td>300</td><td>141</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	40.09	74.00	-33.91	60.90	34.12	10.34	65.27	0.00	300	89	PEAK	2	7311.00	41.99	74.00	-32.01	59.16	35.41	12.78	65.36	0.00	300	141	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																															
1	4874.00	40.09	74.00	-33.91	60.90	34.12	10.34	65.27	0.00	300	89	PEAK																																																														
2	7311.00	41.99	74.00	-32.01	59.16	35.41	12.78	65.36	0.00	300	141	PEAK																																																														

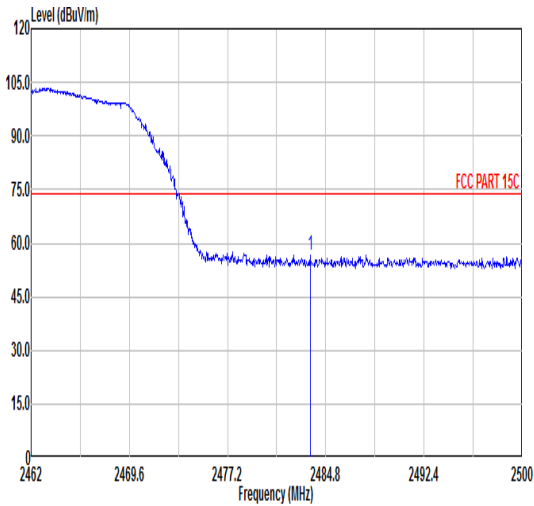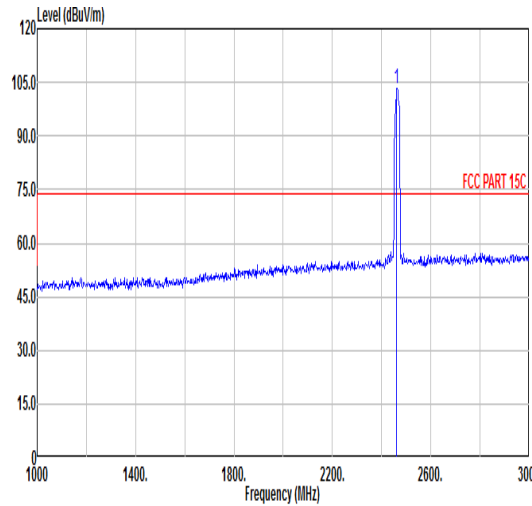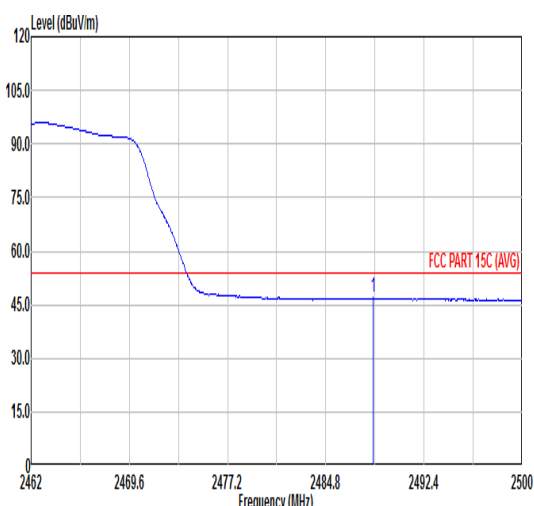
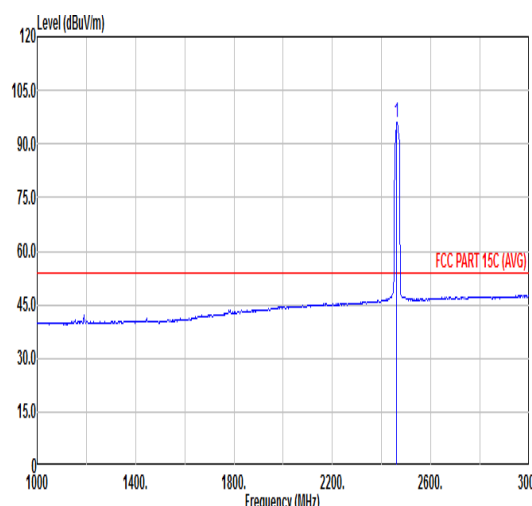


Mode	6																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH11_2462MHz																																																						
ANT	SISO																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>43.97</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>100</td><td>344</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	56.64	74.00	-17.36	43.97	32.16	7.33	32.82	6.00	100	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.58	56.64	74.00	-17.36	43.97	32.16	7.33	32.82	6.00	100	344	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>103.39</td><td>-----</td><td>-----</td><td>90.79</td><td>32.12</td><td>7.30</td><td>32.82</td><td>6.00</td><td>100</td><td>344</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.39	-----	-----	90.79	32.12	7.30	32.82	6.00	100	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	103.39	-----	-----	90.79	32.12	7.30	32.82	6.00	100	344	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.45</td><td>46.91</td><td>54.00</td><td>-7.09</td><td>34.21</td><td>32.17</td><td>7.34</td><td>32.81</td><td>6.00</td><td>100</td><td>344</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.45	46.91	54.00	-7.09	34.21	32.17	7.34	32.81	6.00	100	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2488.45	46.91	54.00	-7.09	34.21	32.17	7.34	32.81	6.00	100	344	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.11</td><td>-----</td><td>-----</td><td>83.51</td><td>32.12</td><td>7.30</td><td>32.82</td><td>6.00</td><td>100</td><td>344</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.11	-----	-----	83.51	32.12	7.30	32.82	6.00	100	344
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	96.11	-----	-----	83.51	32.12	7.30	32.82	6.00	100	344	AVERAGE																																											

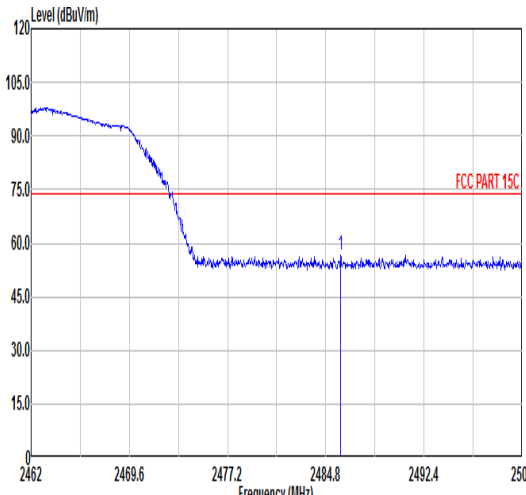
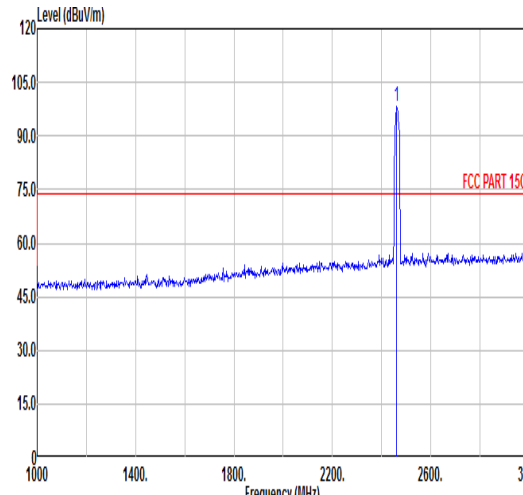
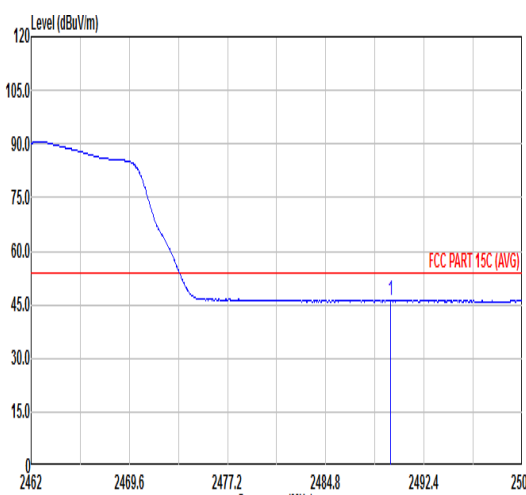
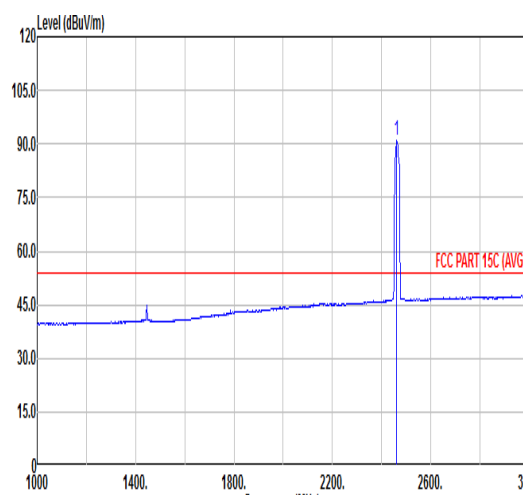


		6																																																																																						
Mode		Band Edge																																																																																						
		2400-2483.5_802.11g_CH11_2462MHz																																																																																						
ANT		SISO																																																																																						
Pol.		Vertical						Fundamental																																																																																
Peak																																																																																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.94	56.66	74.00	-17.34	43.98	32.16	7.33	32.81	6.00	100	334	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.08</td><td>-----</td><td>-----</td><td>85.50</td><td>32.11</td><td>7.29</td><td>32.82</td><td>6.00</td><td>100</td><td>334</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.08	-----	-----	85.50	32.11	7.29	32.82	6.00	100	334
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2485.94	56.66	74.00	-17.34	43.98	32.16	7.33	32.81	6.00	100	334	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2462.00	98.08	-----	-----	85.50	32.11	7.29	32.82	6.00	100	334	PEAK																																																																												
Avg																																																																																								
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.82	46.35	54.00	-7.65	33.65	32.17	7.34	32.81	6.00	100	334	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>90.86</td><td>-----</td><td>-----</td><td>78.28</td><td>32.11</td><td>7.29</td><td>32.82</td><td>6.00</td><td>100</td><td>334</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	90.86	-----	-----	78.28	32.11	7.29	32.82	6.00	100	334
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2489.82	46.35	54.00	-7.65	33.65	32.17	7.34	32.81	6.00	100	334	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2462.00	90.86	-----	-----	78.28	32.11	7.29	32.82	6.00	100	334	AVERAGE																																																																												



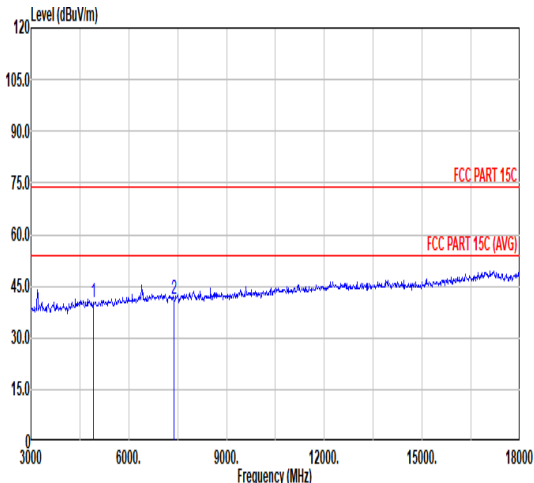
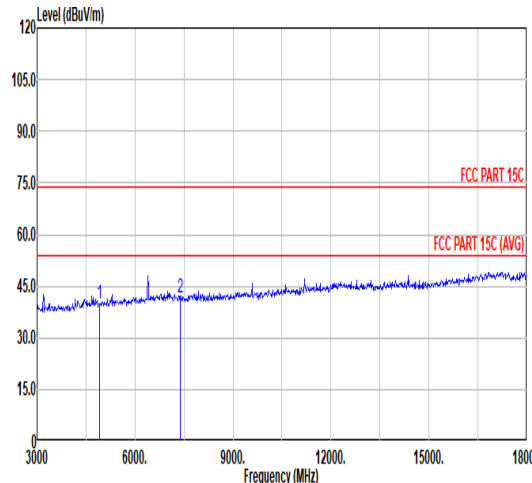


Mode	6																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																									
ANT	SISO																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>40.51</td><td>74.00</td><td>-33.49</td><td>61.22</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>288</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>7300.00</td><td>41.29</td><td>74.00</td><td>-32.71</td><td>58.54</td><td>35.42</td><td>12.87</td><td>65.54</td><td>0.00</td><td>100</td><td>235</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	40.51	74.00	-33.49	61.22	34.16	10.40	65.27	0.00	288	360	PEAK	2	7300.00	41.29	74.00	-32.71	58.54	35.42	12.87	65.54	0.00	100	235	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>39.98</td><td>74.00</td><td>-34.02</td><td>60.69</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>152</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7300.00</td><td>41.59</td><td>74.00</td><td>-32.41</td><td>58.84</td><td>35.42</td><td>12.87</td><td>65.54</td><td>0.00</td><td>300</td><td>155</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	39.98	74.00	-34.02	60.69	34.16	10.40	65.27	0.00	152	0	PEAK	2	7300.00	41.59	74.00	-32.41	58.84	35.42	12.87	65.54	0.00	300	155	Peak
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	40.51	74.00	-33.49	61.22	34.16	10.40	65.27	0.00	288	360	PEAK																																																																																																																														
2	7300.00	41.29	74.00	-32.71	58.54	35.42	12.87	65.54	0.00	100	235	Peak																																																																																																																														
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	39.98	74.00	-34.02	60.69	34.16	10.40	65.27	0.00	152	0	PEAK																																																																																																																														
2	7300.00	41.59	74.00	-32.41	58.84	35.42	12.87	65.54	0.00	300	155	Peak																																																																																																																														

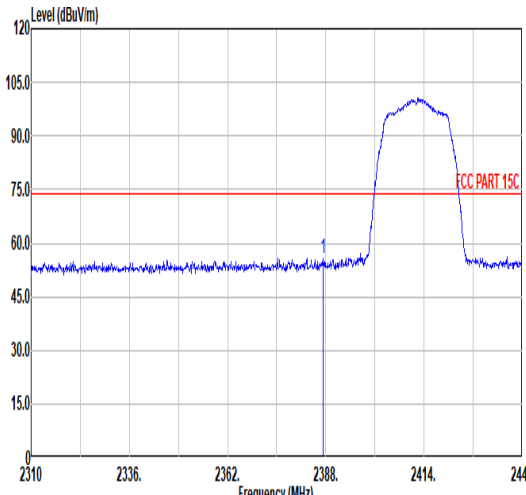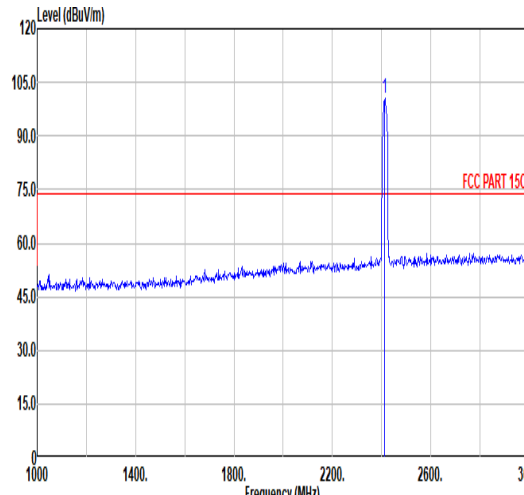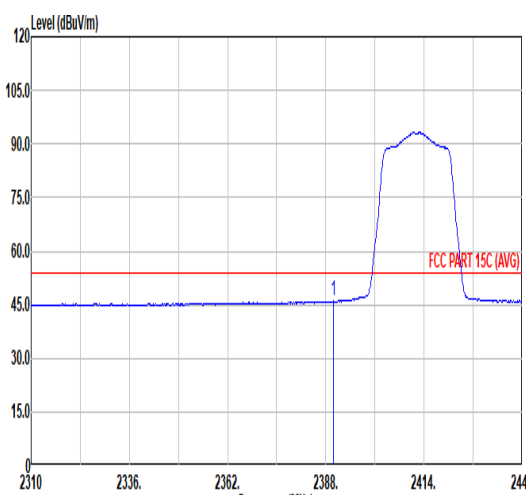
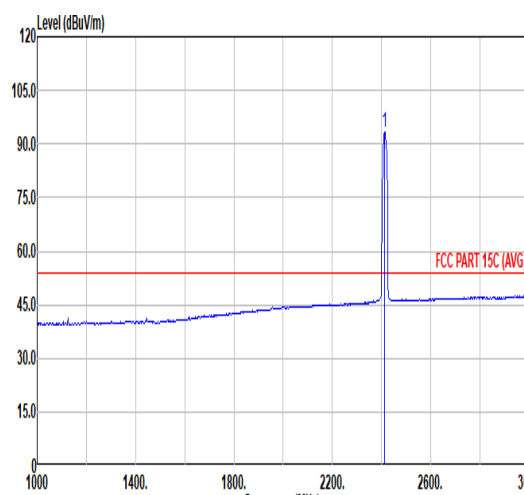


Mode	7																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.22</td><td>55.63</td><td>74.00</td><td>-18.37</td><td>43.36</td><td>31.96</td><td>7.16</td><td>32.85</td><td>6.00</td><td>100</td><td>212</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.22	55.63	74.00	-18.37	43.36	31.96	7.16	32.85	6.00	100	212	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.34</td><td>-----</td><td>-----</td><td>87.95</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>100</td><td>212</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.34	-----	-----	87.95	32.02	7.21	32.84	6.00	100	212
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.22	55.63	74.00	-18.37	43.36	31.96	7.16	32.85	6.00	100	212	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	100.34	-----	-----	87.95	32.02	7.21	32.84	6.00	100	212	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.10</td><td>54.00</td><td>-7.90</td><td>33.82</td><td>31.97</td><td>7.16</td><td>32.85</td><td>6.00</td><td>100</td><td>212</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.10	54.00	-7.90	33.82	31.97	7.16	32.85	6.00	100	212	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.15</td><td>-----</td><td>-----</td><td>80.76</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>100</td><td>212</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.15	-----	-----	80.76	32.02	7.21	32.84	6.00	100	212
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	46.10	54.00	-7.90	33.82	31.97	7.16	32.85	6.00	100	212	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	93.15	-----	-----	80.76	32.02	7.21	32.84	6.00	100	212	AVERAGE																																																																																							

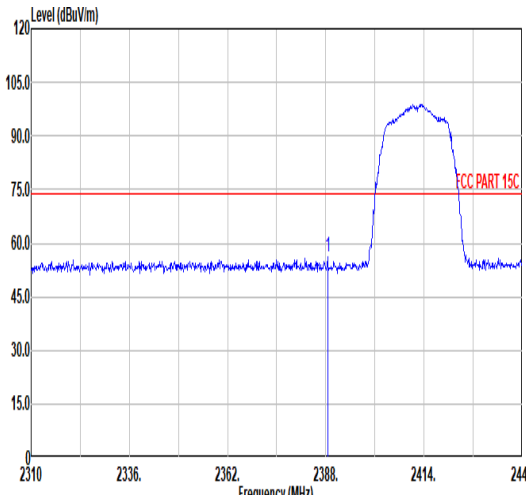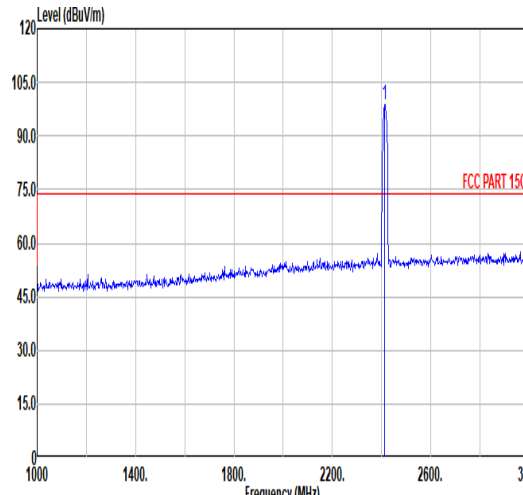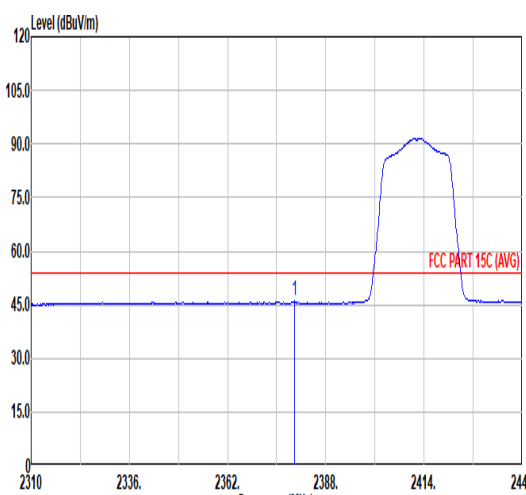
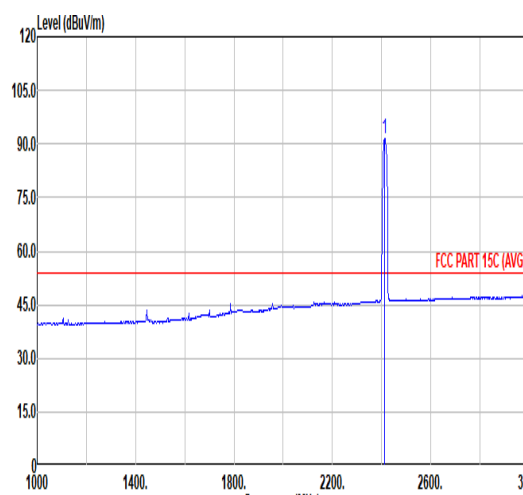


		7																																																																																										
Mode		Band Edge																																																																																										
		2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																										
ANT		SISO																																																																																										
Pol.	Vertical										Fundamental																																																																																	
Peak																																																																																												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.52	55.93	74.00	-18.07	43.65	31.97	7.16	32.85	6.00	249	204	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.74</td><td>-----</td><td>-----</td><td>86.35</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>249</td><td>204</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.74	-----	-----	86.35	32.02	7.21	32.84	6.00	249	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2388.52	55.93	74.00	-18.07	43.65	31.97	7.16	32.85	6.00	249	204	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	98.74	-----	-----	86.35	32.02	7.21	32.84	6.00	249	204	PEAK																																																																																
Avg																																																																																												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.81	46.05	54.00	-7.95	33.81	31.95	7.15	32.86	6.00	249	204	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>91.53</td><td>-----</td><td>-----</td><td>79.14</td><td>32.02</td><td>7.21</td><td>32.84</td><td>6.00</td><td>249</td><td>204</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	91.53	-----	-----	79.14	32.02	7.21	32.84	6.00	249	204
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2379.81	46.05	54.00	-7.95	33.81	31.95	7.15	32.86	6.00	249	204	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	91.53	-----	-----	79.14	32.02	7.21	32.84	6.00	249	204	AVERAGE																																																																																



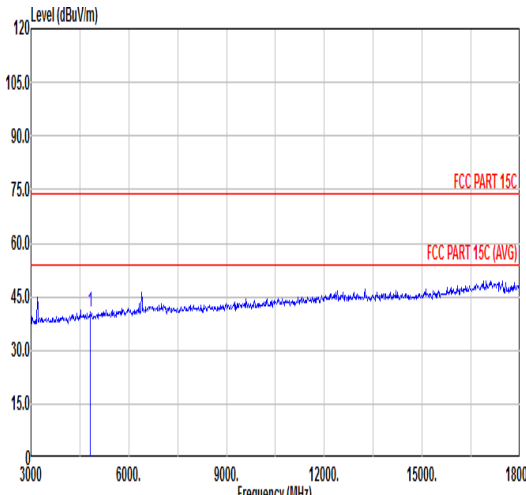
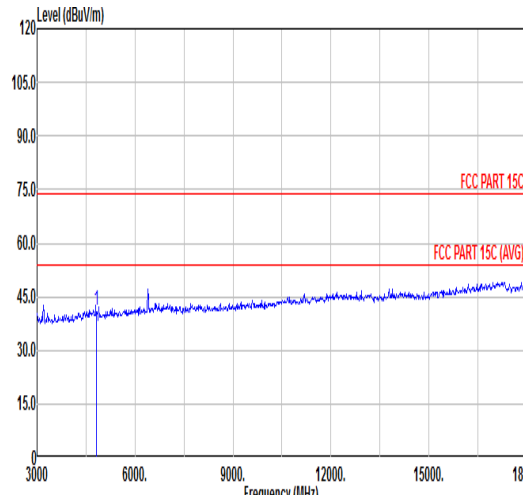


Mode	7																																																										
	Harmonic																																																										
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																										
ANT	SISO																																																										
Pol.	Horizontal						Vertical																																																				
Peak Avg																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr></thead></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark									
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>40.87</td><td>74.00</td><td>-33.13</td><td>61.75</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>300</td><td>194 PEAK</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	40.87	74.00	-33.13	61.75	34.09	10.29	65.26	0.00	300	194 PEAK	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>62.10</td><td>34.09</td><td>10.29</td><td>65.26</td><td>0.00</td><td>100</td><td>166 PEAK</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.22	74.00	-32.78	62.10	34.09	10.29	65.26	0.00	100	166 PEAK
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	4824.00	40.87	74.00	-33.13	61.75	34.09	10.29	65.26	0.00	300	194 PEAK																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	4824.00	41.22	74.00	-32.78	62.10	34.09	10.29	65.26	0.00	100	166 PEAK																																																

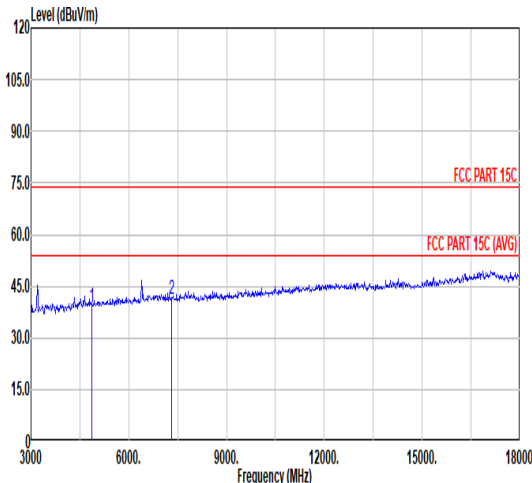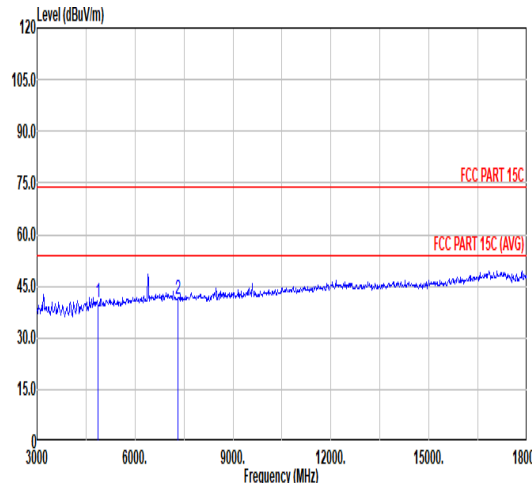

Mode	8																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>38.99</td><td>74.00</td><td>-35.01</td><td>59.80</td><td>34.12</td><td>10.34</td><td>65.27</td><td>0.00</td><td>198</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>58.56</td><td>35.41</td><td>12.78</td><td>65.36</td><td>0.00</td><td>100</td><td>144</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	38.99	74.00	-35.01	59.80	34.12	10.34	65.27	0.00	198	0	PEAK	2	7311.00	41.39	74.00	-32.61	58.56	35.41	12.78	65.36	0.00	100	144	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.19</td><td>74.00</td><td>-33.81</td><td>61.00</td><td>34.12</td><td>10.34</td><td>65.27</td><td>0.00</td><td>300</td><td>33</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>41.29</td><td>74.00</td><td>-32.71</td><td>58.46</td><td>35.41</td><td>12.78</td><td>65.36</td><td>0.00</td><td>100</td><td>228</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.19	74.00	-33.81	61.00	34.12	10.34	65.27	0.00	300	33	PEAK	2	7311.00	41.29	74.00	-32.71	58.46	35.41	12.78	65.36	0.00	100	228	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4874.00	38.99	74.00	-35.01	59.80	34.12	10.34	65.27	0.00	198	0	PEAK																																																																																																												
2	7311.00	41.39	74.00	-32.61	58.56	35.41	12.78	65.36	0.00	100	144	PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor		Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4874.00	40.19	74.00	-33.81	61.00	34.12	10.34	65.27	0.00	300	33	PEAK																																																																																																												
2	7311.00	41.29	74.00	-32.71	58.46	35.41	12.78	65.36	0.00	100	228	PEAK																																																																																																												

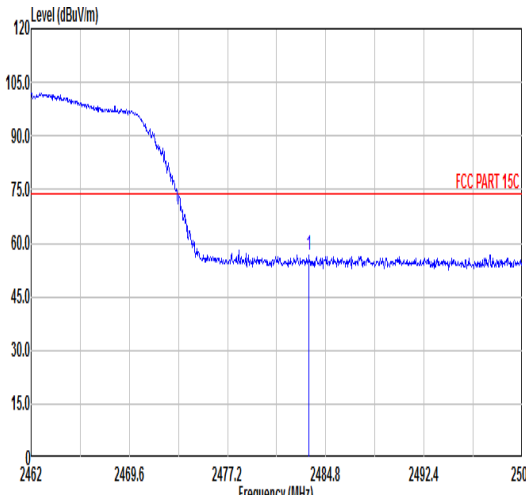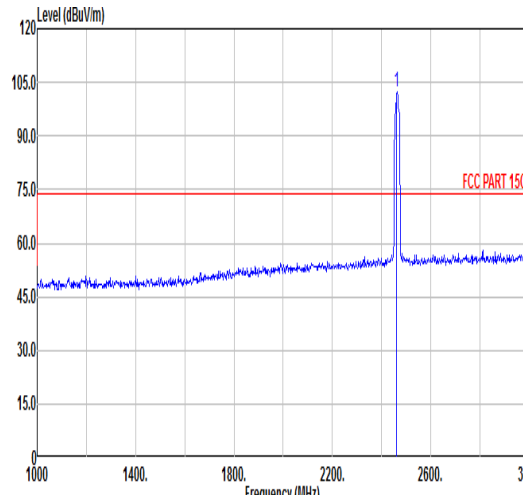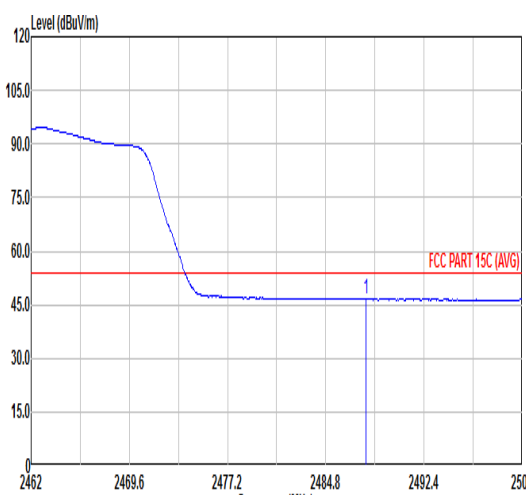
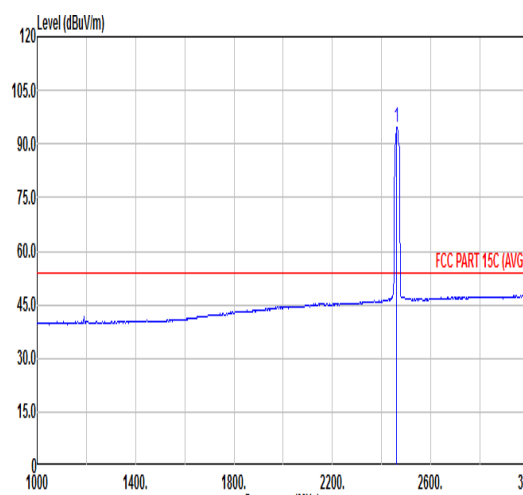


		9																																																					
Mode		Band Edge																																																					
		2400-2483.5_802.11n_HT20_CH11_2462MHz																																																					
ANT		SISO																																																					
Pol.		Horizontal																																																					
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>43.80</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>100</td><td>330</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	56.47	74.00	-17.53	43.80	32.16	7.33	32.82	6.00	100	330
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.51	56.47	74.00	-17.53	43.80	32.16	7.33	32.82	6.00	100	330	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.12</td><td>-----</td><td>-----</td><td>89.52</td><td>32.12</td><td>7.30</td><td>32.82</td><td>6.00</td><td>100</td><td>330</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.12	-----	-----	89.52	32.12	7.30	32.82	6.00	100	330
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	102.12	-----	-----	89.52	32.12	7.30	32.82	6.00	100	330	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.92</td><td>46.86</td><td>54.00</td><td>-7.14</td><td>34.16</td><td>32.17</td><td>7.34</td><td>32.81</td><td>6.00</td><td>100</td><td>330</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.92	46.86	54.00	-7.14	34.16	32.17	7.34	32.81	6.00	100	330
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2487.92	46.86	54.00	-7.14	34.16	32.17	7.34	32.81	6.00	100	330	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>94.71</td><td>-----</td><td>-----</td><td>82.13</td><td>32.11</td><td>7.29</td><td>32.82</td><td>6.00</td><td>100</td><td>330</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.71	-----	-----	82.13	32.11	7.29	32.82	6.00	100	330
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	94.71	-----	-----	82.13	32.11	7.29	32.82	6.00	100	330	AVERAGE																																											





		9										
Mode		Band Edge										
		2400-2483.5_802.11n_HT20_CH11_2462MHz										
ANT		SISO										
Pol.												
Peak	Vertical											
	Fundamental											
Avg	Vertical											
	Fundamental											

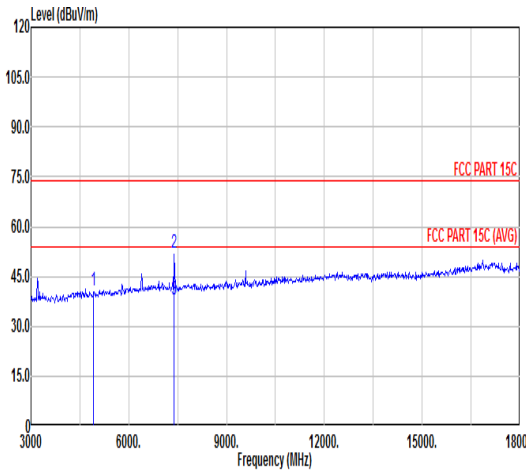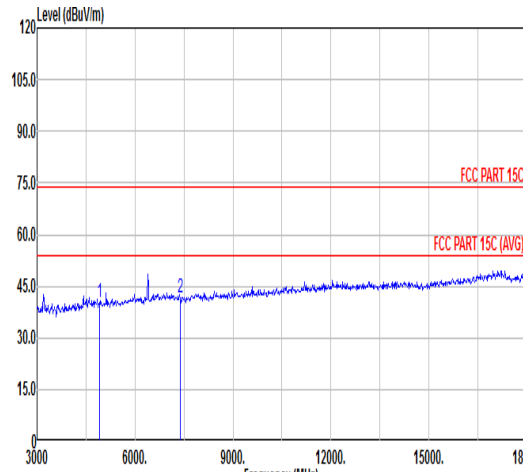

Mode	9																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																										
ANT	SISO																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>61.27</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>69.30</td><td>35.42</td><td>12.88</td><td>65.56</td><td>0.00</td><td>153</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>38.26</td><td>54.00</td><td>-15.74</td><td>55.51</td><td>35.42</td><td>12.88</td><td>65.55</td><td>0.00</td><td>153</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.56	74.00	-33.44	61.27	34.16	10.40	65.27	0.00	100	0	PEAK	2	7386.00	52.04	74.00	-21.96	69.30	35.42	12.88	65.56	0.00	153	0	PEAK	3	7386.00	38.26	54.00	-15.74	55.51	35.42	12.88	65.55	0.00	153	0	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.13</td><td>74.00</td><td>-33.87</td><td>60.84</td><td>34.16</td><td>10.40</td><td>65.27</td><td>0.00</td><td>300</td><td>83</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.52</td><td>74.00</td><td>-32.48</td><td>58.78</td><td>35.42</td><td>12.88</td><td>65.56</td><td>0.00</td><td>261</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.13	74.00	-33.87	60.84	34.16	10.40	65.27	0.00	300	83	PEAK	2	7386.00	41.52	74.00	-32.48	58.78	35.42	12.88	65.56	0.00	261	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	4924.00	40.56	74.00	-33.44	61.27	34.16	10.40	65.27	0.00	100	0	PEAK																																																																																																																															
2	7386.00	52.04	74.00	-21.96	69.30	35.42	12.88	65.56	0.00	153	0	PEAK																																																																																																																															
3	7386.00	38.26	54.00	-15.74	55.51	35.42	12.88	65.55	0.00	153	0	AVERAGE																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	4924.00	40.13	74.00	-33.87	60.84	34.16	10.40	65.27	0.00	300	83	PEAK																																																																																																																															
2	7386.00	41.52	74.00	-32.48	58.78	35.42	12.88	65.56	0.00	261	360	PEAK																																																																																																																															

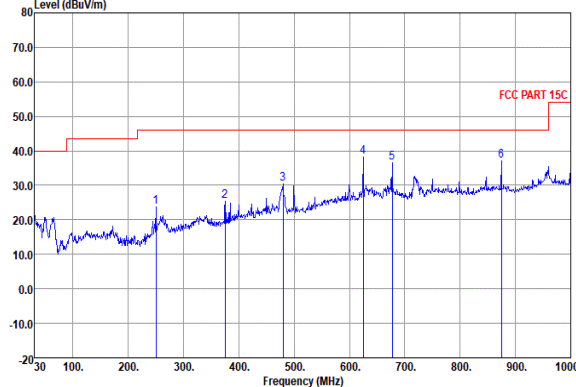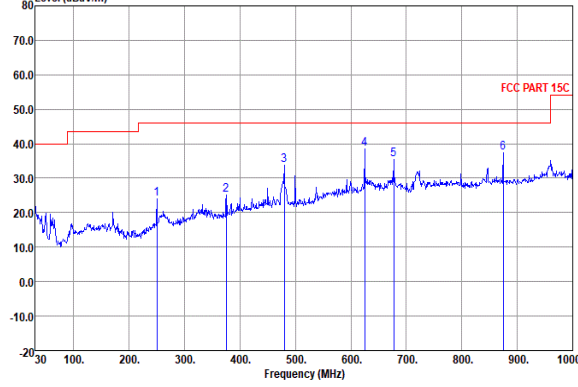

Mode	Emission below 1GHz																																																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak QP	Data: 11 						Data: 12 																																																																																																																	
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>250.19</td><td>23.81</td><td>-22.19</td><td>46.00</td><td>35.71</td><td>18.40</td><td>2.10</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>2</td><td>375.32</td><td>25.40</td><td>-20.60</td><td>46.00</td><td>34.12</td><td>20.80</td><td>2.88</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>3</td><td>480.08</td><td>30.28</td><td>-15.72</td><td>46.00</td><td>36.14</td><td>23.40</td><td>3.14</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>4</td><td>624.61</td><td>38.22</td><td>-7.78</td><td>46.00</td><td>40.84</td><td>26.10</td><td>3.68</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>5</td><td>676.99</td><td>36.48</td><td>-9.52</td><td>46.00</td><td>38.91</td><td>26.12</td><td>3.85</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>6</td><td>874.87</td><td>37.03</td><td>-8.97</td><td>46.00</td><td>35.16</td><td>29.20</td><td>4.37</td><td>31.70</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor							MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	250.19	23.81	-22.19	46.00	35.71	18.40	2.10	32.40	---	---	Peak HORIZONTAL	2	375.32	25.40	-20.60	46.00	34.12	20.80	2.88	32.40	---	---	Peak HORIZONTAL	3	480.08	30.28	-15.72	46.00	36.14	23.40	3.14	32.40	---	---	Peak HORIZONTAL	4	624.61	38.22	-7.78	46.00	40.84	26.10	3.68	32.40	---	---	Peak HORIZONTAL	5	676.99	36.48	-9.52	46.00	38.91	26.12	3.85	32.40	---	---	Peak HORIZONTAL	6	874.87	37.03	-8.97	46.00	35.16	29.20	4.37	31.70	---	---	Peak HORIZONTAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor																																																																																																																		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	250.19	23.81	-22.19	46.00	35.71	18.40	2.10	32.40	---	---	Peak HORIZONTAL																																																																																																													
2	375.32	25.40	-20.60	46.00	34.12	20.80	2.88	32.40	---	---	Peak HORIZONTAL																																																																																																													
3	480.08	30.28	-15.72	46.00	36.14	23.40	3.14	32.40	---	---	Peak HORIZONTAL																																																																																																													
4	624.61	38.22	-7.78	46.00	40.84	26.10	3.68	32.40	---	---	Peak HORIZONTAL																																																																																																													
5	676.99	36.48	-9.52	46.00	38.91	26.12	3.85	32.40	---	---	Peak HORIZONTAL																																																																																																													
6	874.87	37.03	-8.97	46.00	35.16	29.20	4.37	31.70	---	---	Peak HORIZONTAL																																																																																																													
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>250.19</td><td>23.96</td><td>-22.04</td><td>46.00</td><td>35.86</td><td>18.40</td><td>2.10</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>2</td><td>375.32</td><td>25.26</td><td>-20.74</td><td>46.00</td><td>33.98</td><td>20.80</td><td>2.88</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>3</td><td>480.08</td><td>33.83</td><td>-12.17</td><td>46.00</td><td>39.69</td><td>23.40</td><td>3.14</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>4</td><td>624.61</td><td>38.53</td><td>-7.47</td><td>46.00</td><td>41.15</td><td>26.10</td><td>3.68</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>5</td><td>676.99</td><td>35.34</td><td>-10.66</td><td>46.00</td><td>37.77</td><td>26.12</td><td>3.85</td><td>32.40</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>6</td><td>874.87</td><td>37.30</td><td>-8.70</td><td>46.00</td><td>35.43</td><td>29.20</td><td>4.37</td><td>31.70</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr></table>													Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor							MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	250.19	23.96	-22.04	46.00	35.86	18.40	2.10	32.40	---	---	Peak VERTICAL	2	375.32	25.26	-20.74	46.00	33.98	20.80	2.88	32.40	---	---	Peak VERTICAL	3	480.08	33.83	-12.17	46.00	39.69	23.40	3.14	32.40	---	---	Peak VERTICAL	4	624.61	38.53	-7.47	46.00	41.15	26.10	3.68	32.40	---	---	Peak VERTICAL	5	676.99	35.34	-10.66	46.00	37.77	26.12	3.85	32.40	---	---	Peak VERTICAL	6	874.87	37.30	-8.70	46.00	35.43	29.20	4.37	31.70	---	---	Peak VERTICAL	
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																													
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor																																																																																																																		
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	250.19	23.96	-22.04	46.00	35.86	18.40	2.10	32.40	---	---	Peak VERTICAL																																																																																																													
2	375.32	25.26	-20.74	46.00	33.98	20.80	2.88	32.40	---	---	Peak VERTICAL																																																																																																													
3	480.08	33.83	-12.17	46.00	39.69	23.40	3.14	32.40	---	---	Peak VERTICAL																																																																																																													
4	624.61	38.53	-7.47	46.00	41.15	26.10	3.68	32.40	---	---	Peak VERTICAL																																																																																																													
5	676.99	35.34	-10.66	46.00	37.77	26.12	3.85	32.40	---	---	Peak VERTICAL																																																																																																													
6	874.87	37.30	-8.70	46.00	35.43	29.20	4.37	31.70	---	---	Peak VERTICAL																																																																																																													




Mode		
	Emission after 18GHz	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak Avg		

Note: For above 18GHz, there are no signals, thus only test worse case is shown in the report.


Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.51	-	-	10Hz
802.11g	93.36	1.428	0.700	0.75kHz
802.11n HT20	92.46	1.333	0.750	0.82kHz

802.11b

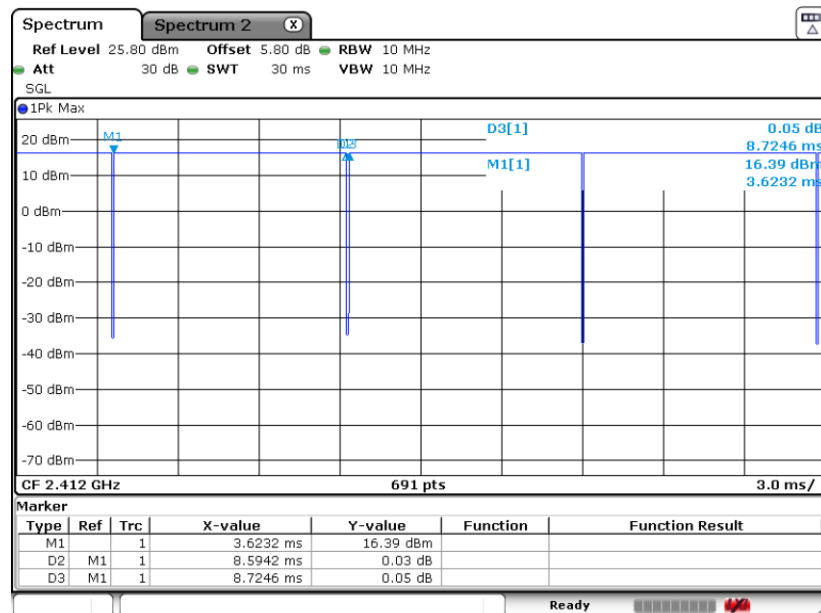

802.11g

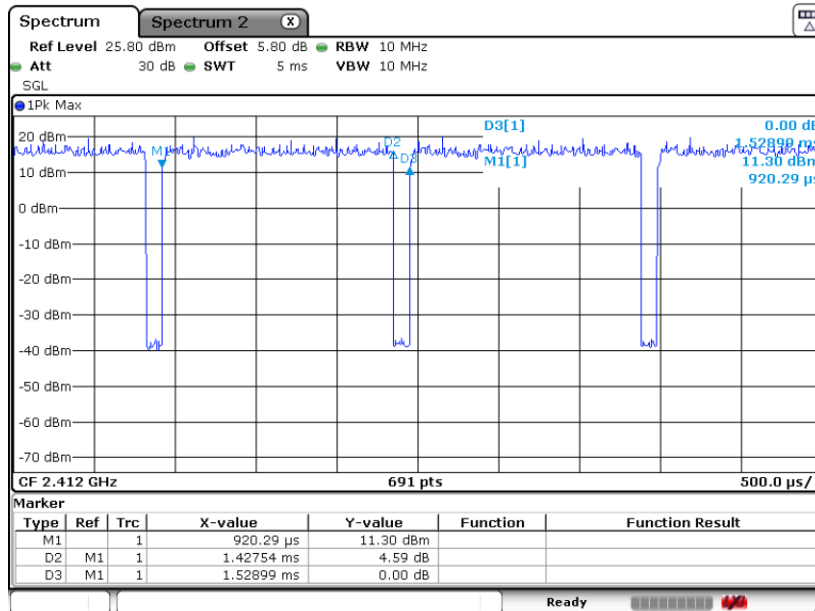

802.11n HT20

