



Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

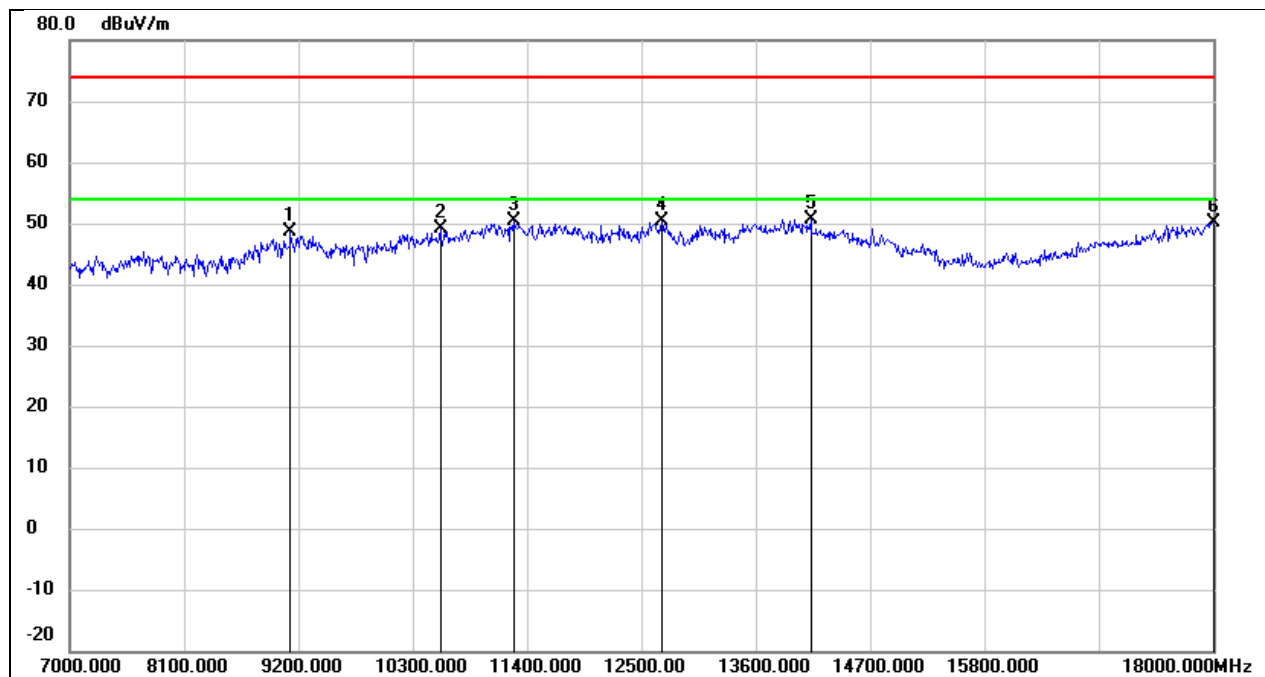


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.11	10.42	48.53	74.00	-25.47	peak
2	10564.000	36.18	13.06	49.24	74.00	-24.76	peak
3	11268.000	34.51	15.83	50.34	74.00	-23.66	peak
4	12698.000	32.41	18.08	50.49	74.00	-23.51	peak
5	14128.000	29.38	21.34	50.72	74.00	-23.28	peak
6	18000.000	24.07	26.12	50.19	74.00	-23.81	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

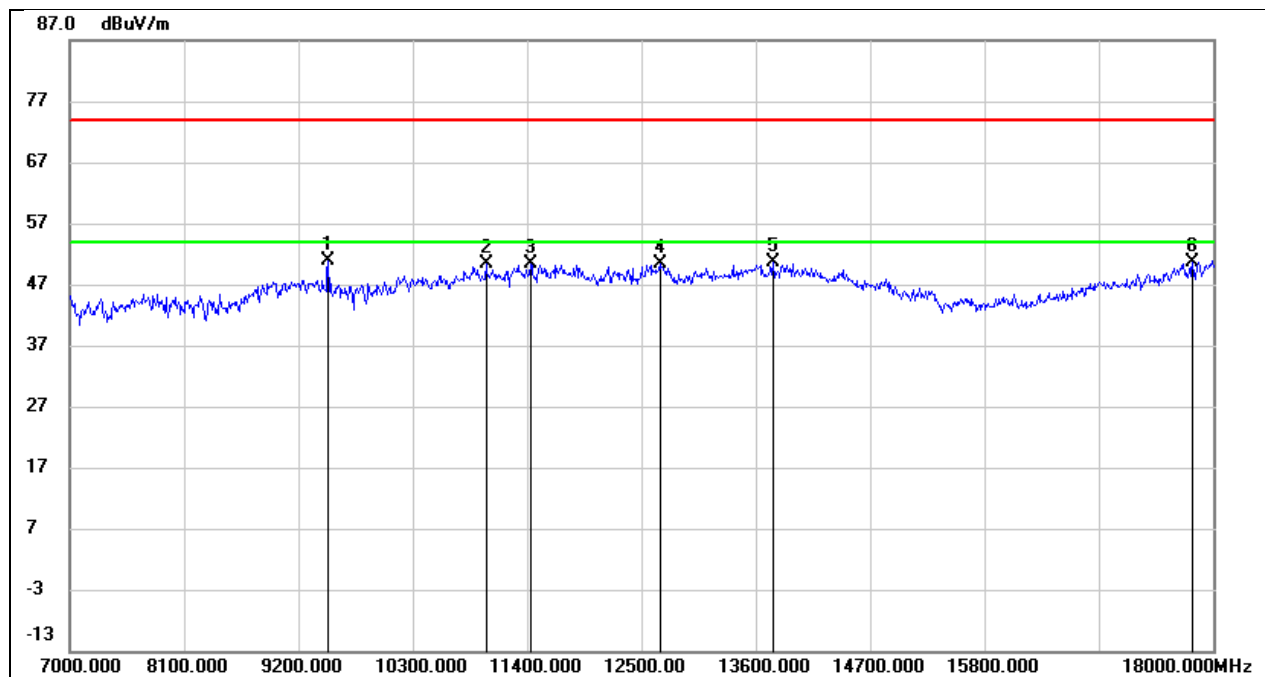


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9486.000	40.34	10.65	50.99	74.00	-23.01	peak
2	11004.000	35.65	14.74	50.39	74.00	-23.61	peak
3	11433.000	33.97	16.50	50.47	74.00	-23.53	peak
4	12676.000	32.28	18.05	50.33	74.00	-23.67	peak
5	13765.000	29.44	21.30	50.74	74.00	-23.26	peak
6	17802.000	25.82	24.76	50.58	74.00	-23.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

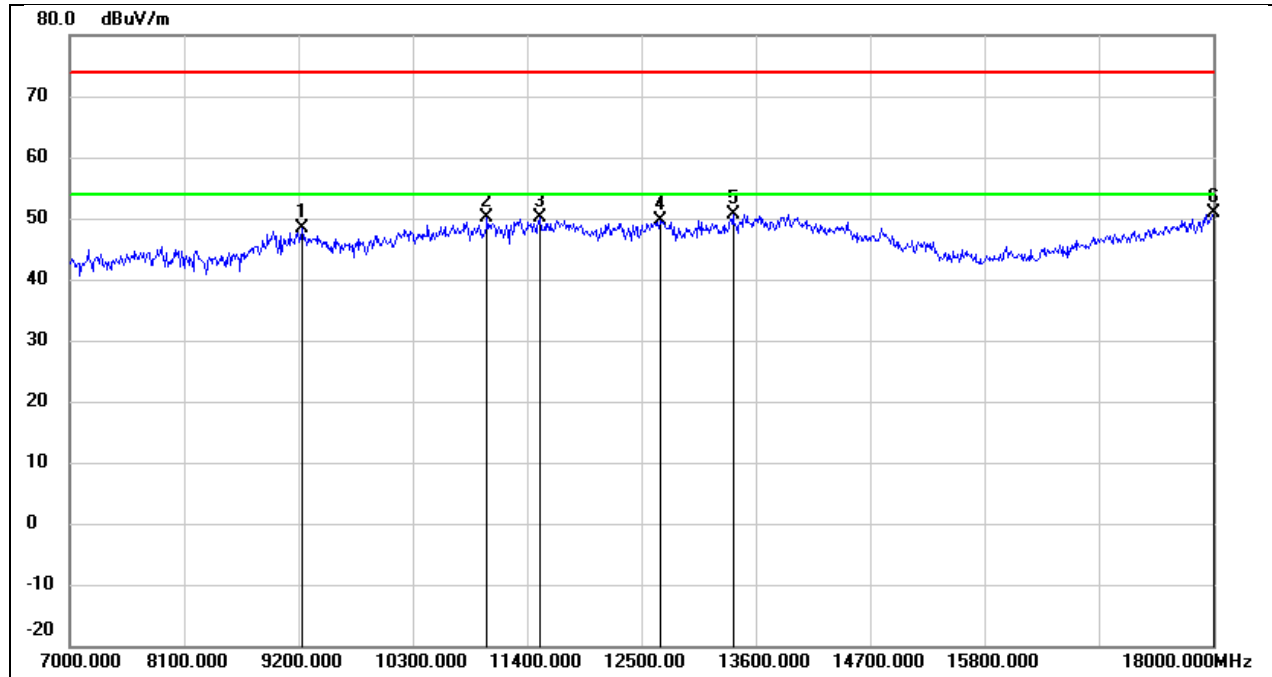


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.81	10.48	48.29	74.00	-25.71	peak
2	11015.000	35.26	14.79	50.05	74.00	-23.95	peak
3	11521.000	33.40	16.82	50.22	74.00	-23.78	peak
4	12687.000	31.56	18.05	49.61	74.00	-24.39	peak
5	13380.000	30.44	20.12	50.56	74.00	-23.44	peak
6	18000.000	24.78	26.12	50.90	74.00	-23.10	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

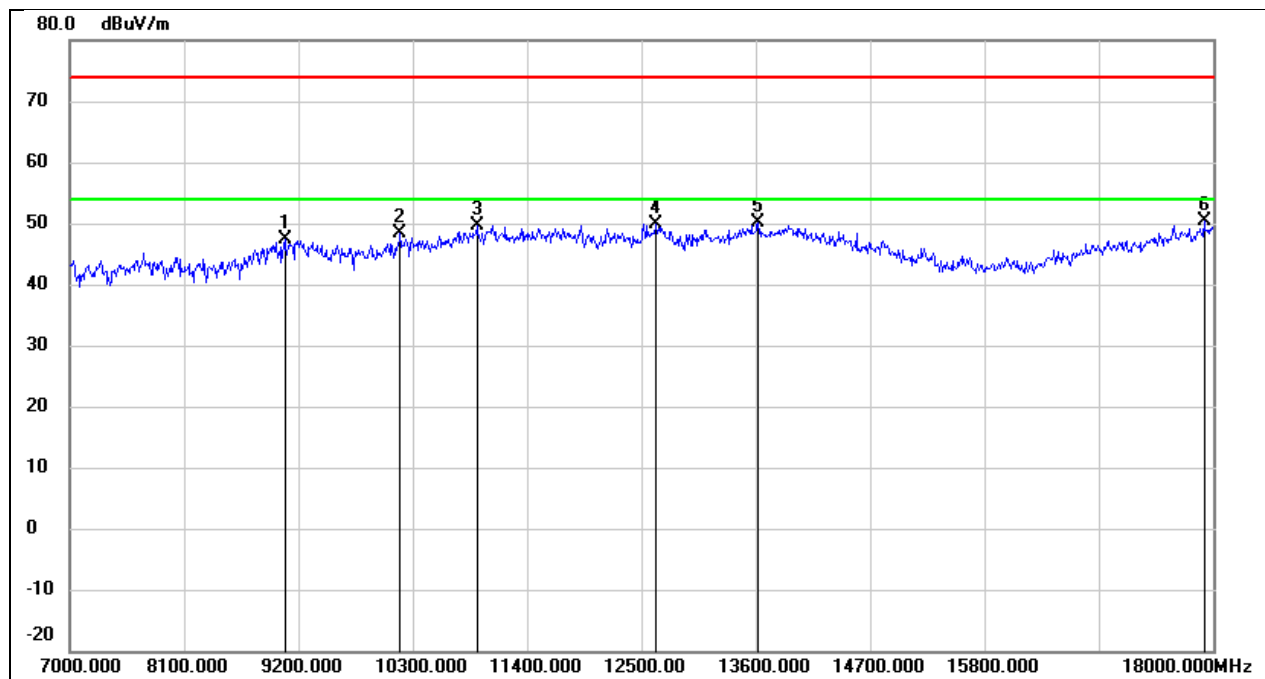


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.96	10.39	47.35	74.00	-26.65	peak
2	10179.000	36.34	12.14	48.48	74.00	-25.52	peak
3	10916.000	35.25	14.39	49.64	74.00	-24.36	peak
4	12643.000	31.94	18.01	49.95	74.00	-24.05	peak
5	13622.000	29.14	20.95	50.09	74.00	-23.91	peak
6	17912.000	24.82	25.52	50.34	74.00	-23.66	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

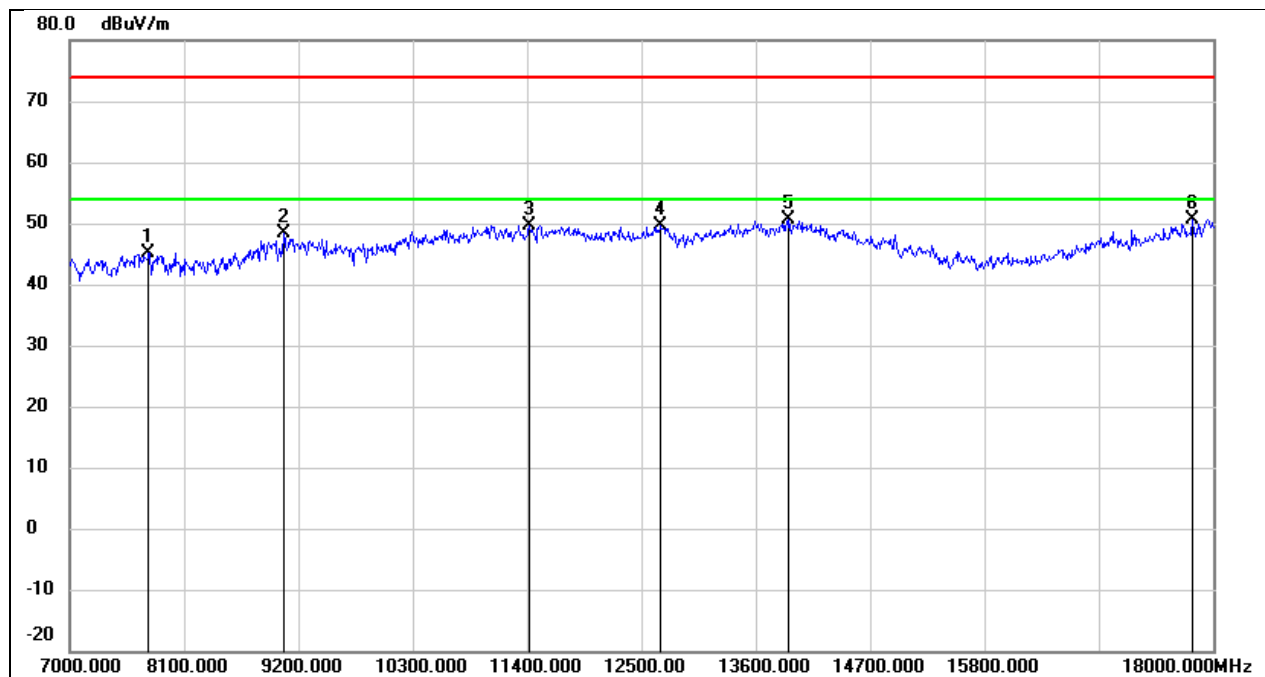


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.48	6.64	45.12	74.00	-28.88	peak
2	9057.000	37.93	10.38	48.31	74.00	-25.69	peak
3	11422.000	33.27	16.46	49.73	74.00	-24.27	peak
4	12687.000	31.59	18.05	49.64	74.00	-24.36	peak
5	13919.000	28.88	21.68	50.56	74.00	-23.44	peak
6	17802.000	25.75	24.76	50.51	74.00	-23.49	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

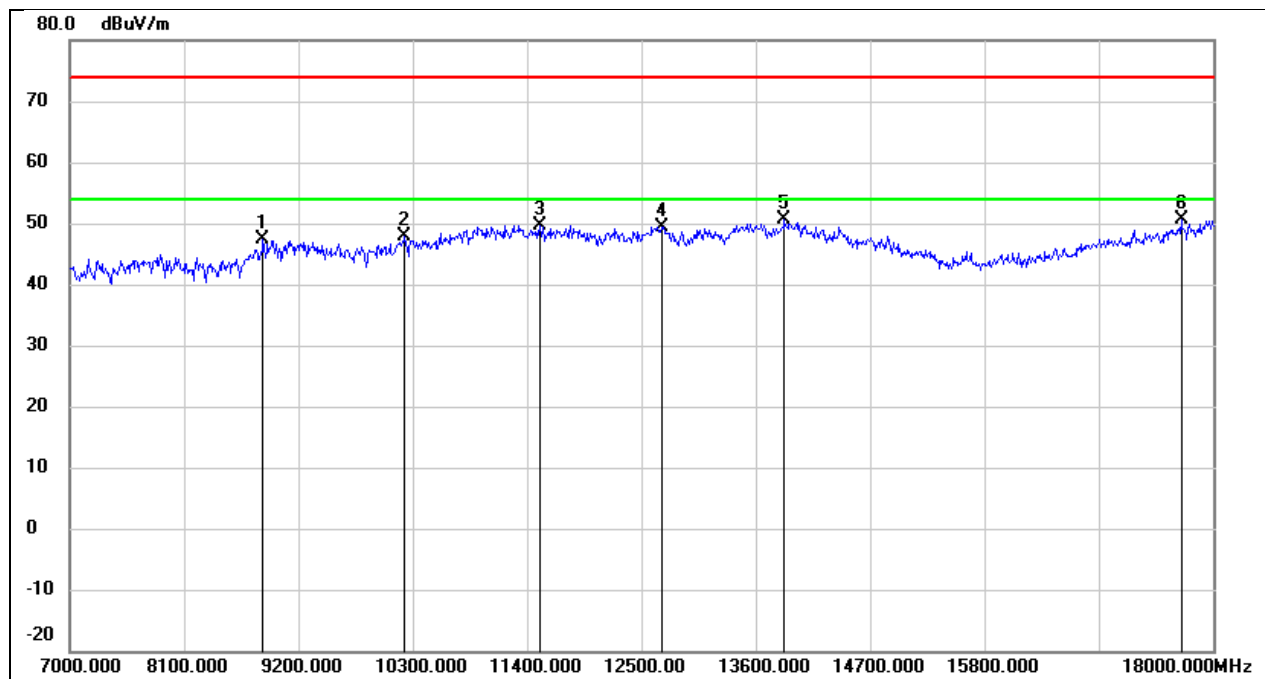


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8859.000	38.04	9.36	47.40	74.00	-26.60	peak
2	10223.000	35.59	12.24	47.83	74.00	-26.17	peak
3	11521.000	32.93	16.82	49.75	74.00	-24.25	peak
4	12698.000	31.23	18.08	49.31	74.00	-24.69	peak
5	13875.000	29.08	21.57	50.65	74.00	-23.35	peak
6	17692.000	26.64	24.01	50.65	74.00	-23.35	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

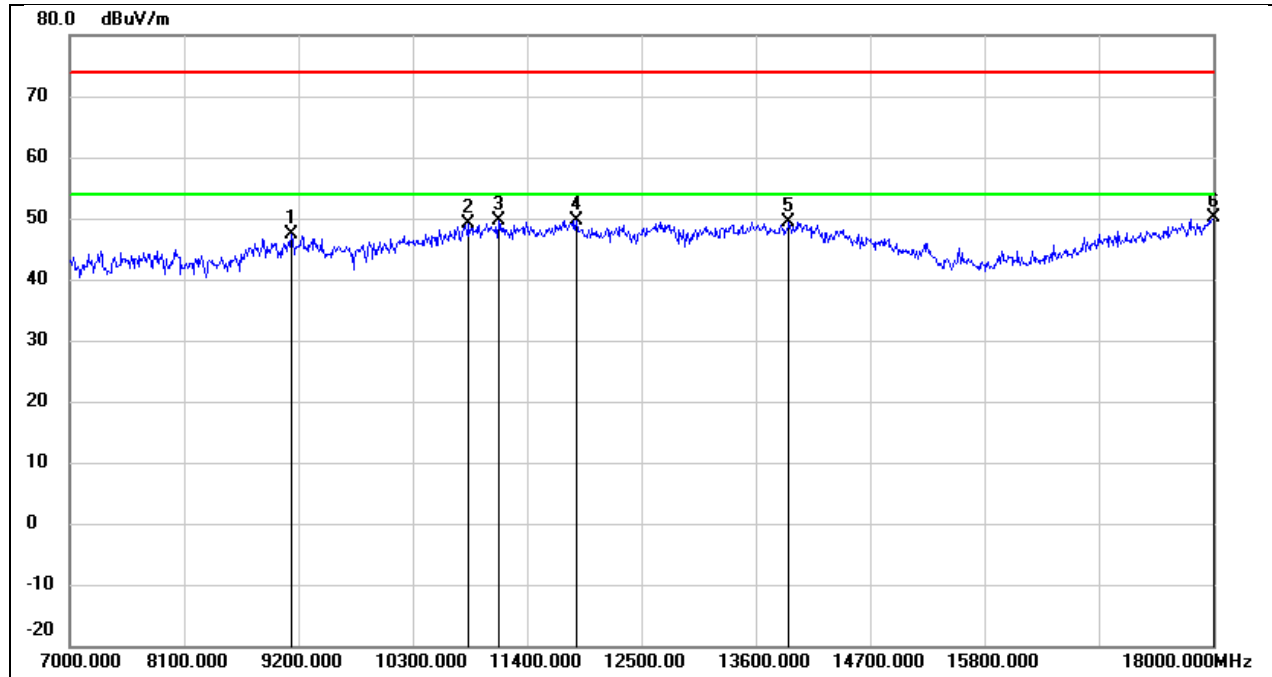


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.85	10.41	47.26	74.00	-26.74	peak
2	10839.000	35.04	14.10	49.14	74.00	-24.86	peak
3	11125.000	34.51	15.22	49.73	74.00	-24.27	peak
4	11873.000	32.20	17.46	49.66	74.00	-24.34	peak
5	13919.000	27.65	21.68	49.33	74.00	-24.67	peak
6	18000.000	24.02	26.12	50.14	74.00	-23.86	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

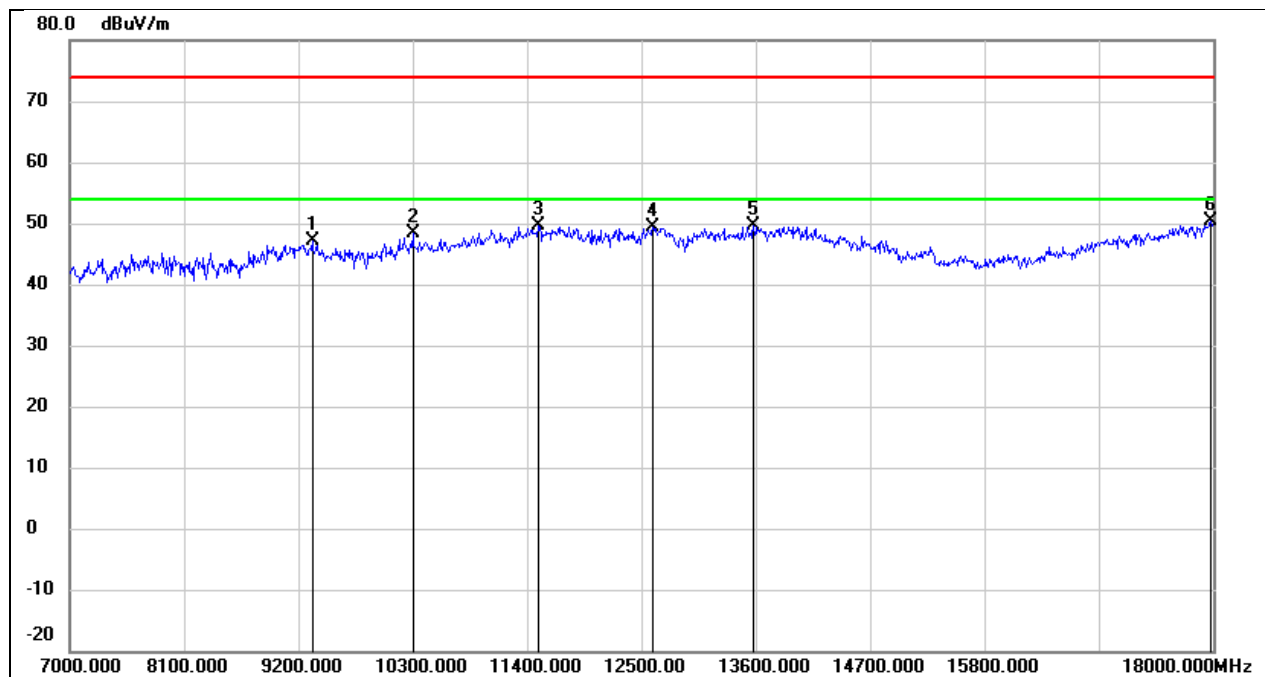


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.56	10.54	47.10	74.00	-26.90	peak
2	10300.000	36.04	12.40	48.44	74.00	-25.56	peak
3	11510.000	32.79	16.79	49.58	74.00	-24.42	peak
4	12610.000	31.39	17.97	49.36	74.00	-24.64	peak
5	13578.000	28.75	20.83	49.58	74.00	-24.42	peak
6	17978.000	24.33	25.97	50.30	74.00	-23.70	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

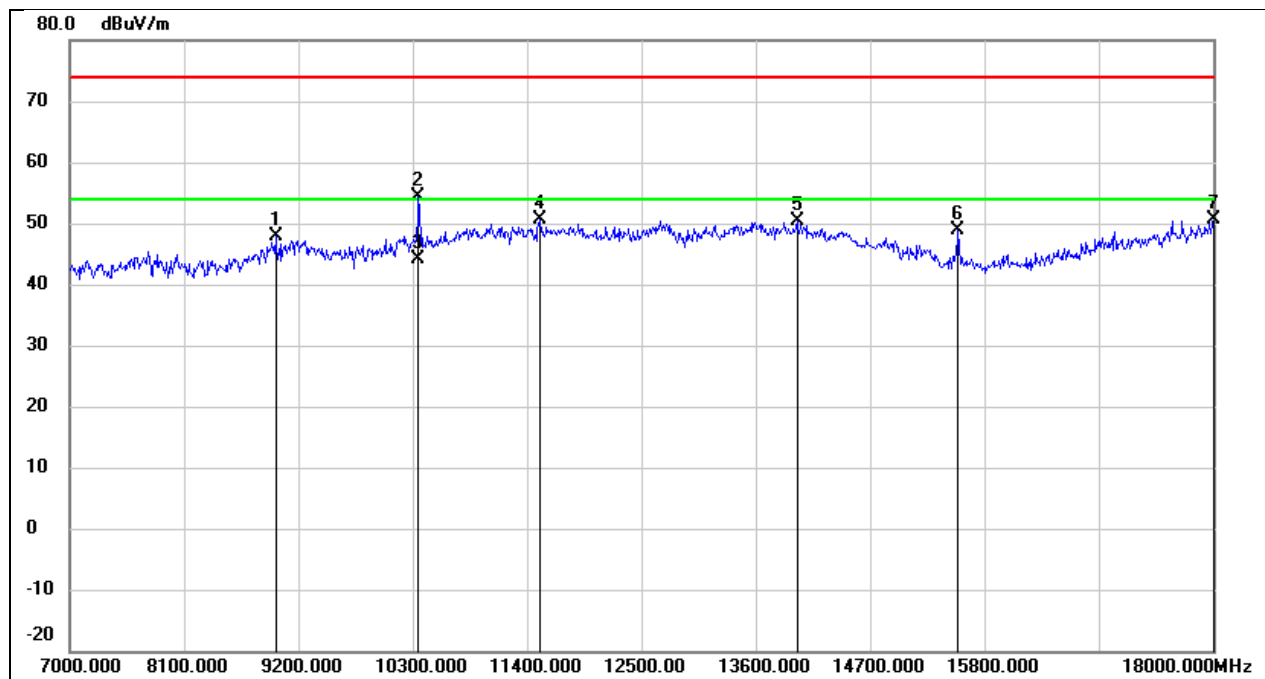


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.65	10.21	47.86	74.00	-26.14	peak
2	10355.000	41.85	12.52	54.37	74.00	-19.63	peak
3	10355.000	31.71	12.52	44.23	54.00	-9.77	AVG
4	11521.000	33.70	16.82	50.52	74.00	-23.48	peak
5	13996.000	28.44	21.87	50.31	74.00	-23.69	peak
6	15547.000	32.14	16.73	48.87	74.00	-25.13	peak
7	18000.000	24.42	26.12	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

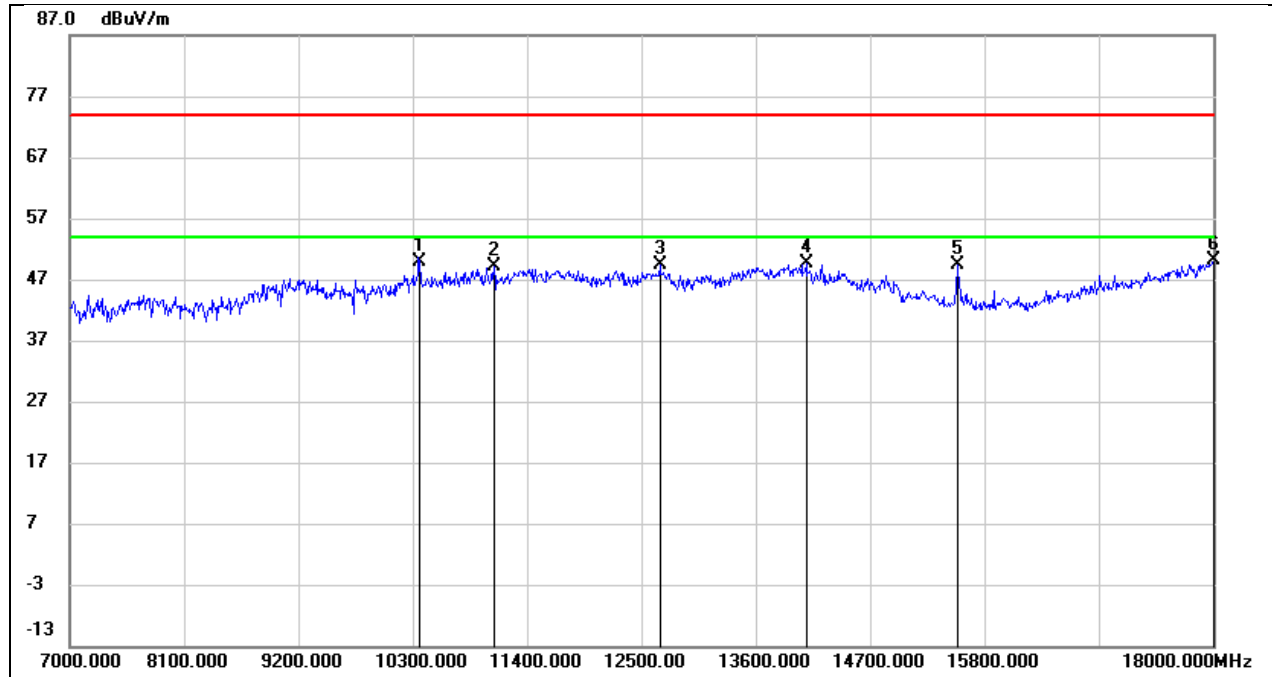


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10366.000	37.46	12.54	50.00	74.00	-24.00	peak
2	11081.000	34.17	15.05	49.22	74.00	-24.78	peak
3	12676.000	31.40	18.05	49.45	74.00	-24.55	peak
4	14084.000	28.23	21.52	49.75	74.00	-24.25	peak
5	15536.000	32.76	16.73	49.49	74.00	-24.51	peak
6	18000.000	24.09	26.12	50.21	74.00	-23.79	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

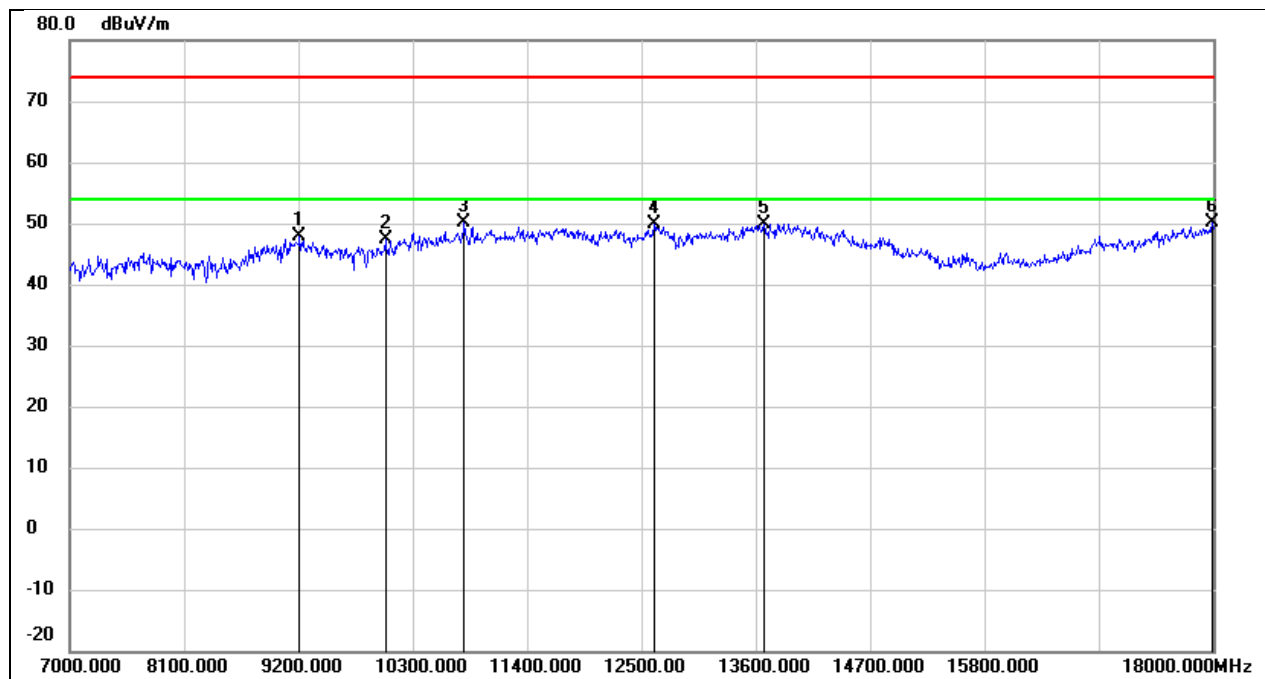


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.51	10.47	47.98	74.00	-26.02	peak
2	10036.000	35.53	11.84	47.37	74.00	-26.63	peak
3	10795.000	36.15	13.94	50.09	74.00	-23.91	peak
4	12621.000	31.89	17.98	49.87	74.00	-24.13	peak
5	13677.000	28.69	21.08	49.77	74.00	-24.23	peak
6	17989.000	24.06	26.04	50.10	74.00	-23.90	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3 V

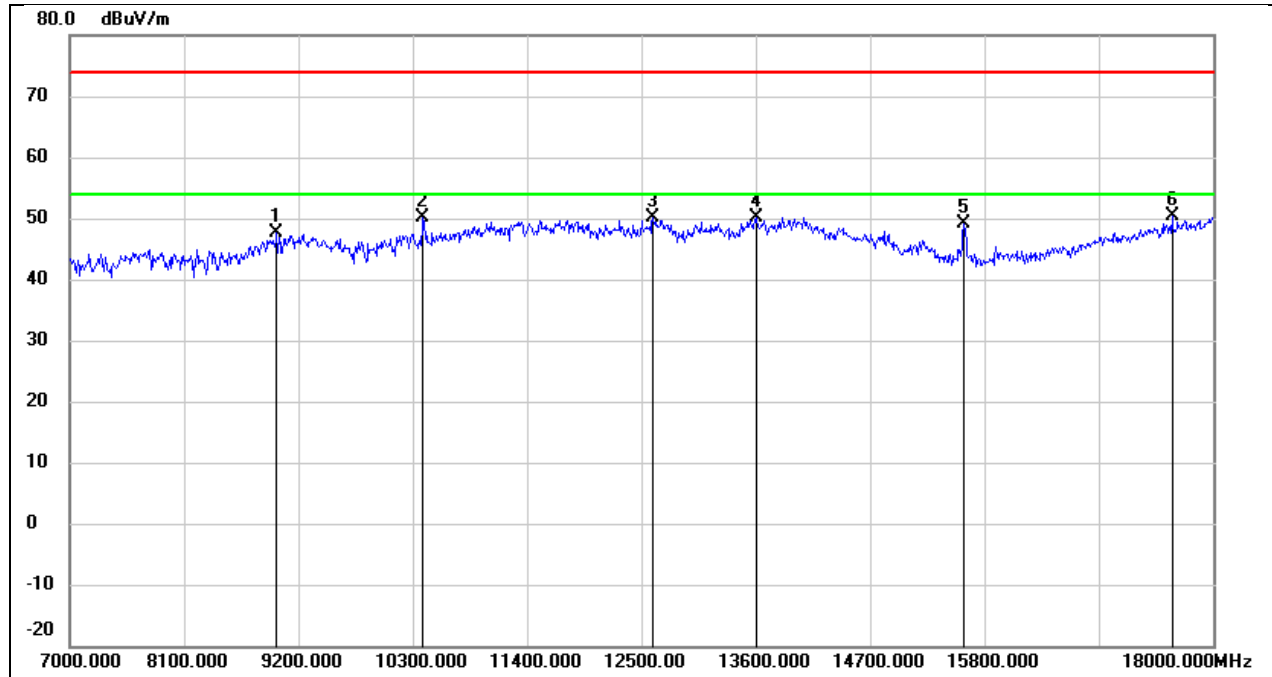


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.34	10.28	47.62	74.00	-26.38	peak
2	10399.000	37.52	12.61	50.13	74.00	-23.87	peak
3	12610.000	32.13	17.97	50.10	74.00	-23.90	peak
4	13600.000	29.32	20.89	50.21	74.00	-23.79	peak
5	15602.000	32.32	16.75	49.07	74.00	-24.93	peak
6	17604.000	26.92	23.41	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

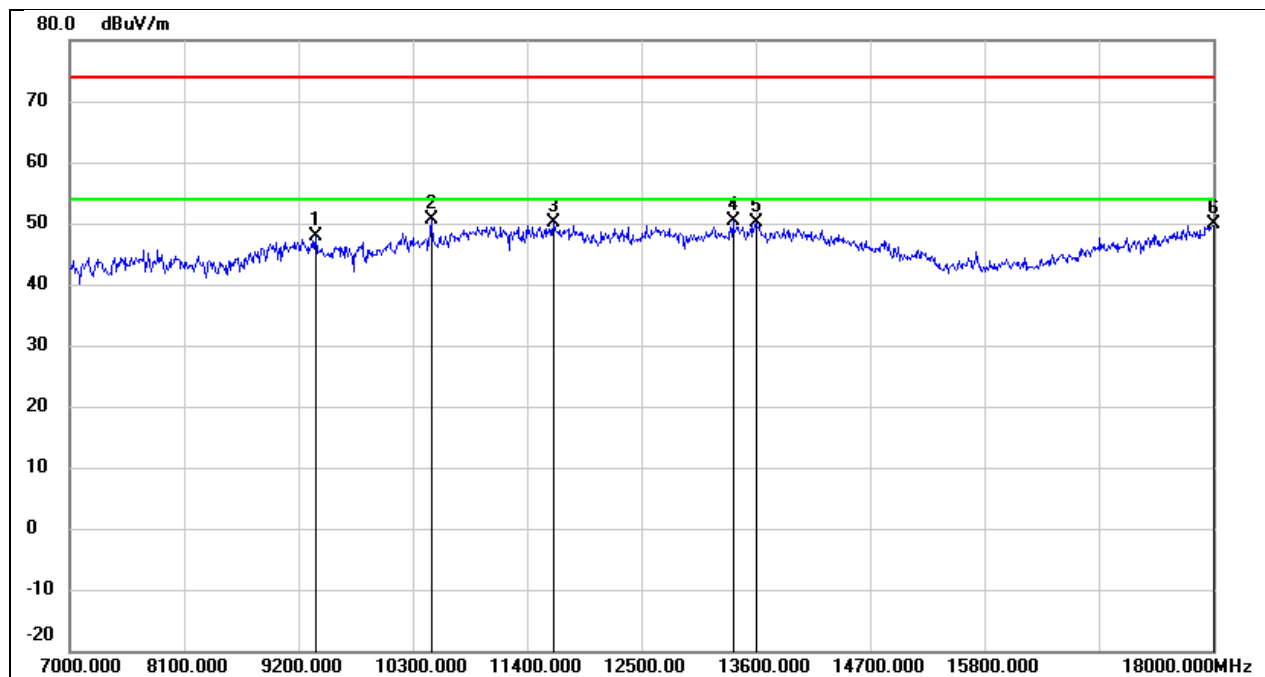


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	37.22	10.57	47.79	74.00	-26.21	peak
2	10476.000	37.75	12.77	50.52	74.00	-23.48	peak
3	11653.000	33.06	17.05	50.11	74.00	-23.89	peak
4	13380.000	30.30	20.12	50.42	74.00	-23.58	peak
5	13600.000	29.22	20.89	50.11	74.00	-23.89	peak
6	18000.000	23.83	26.12	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3 V

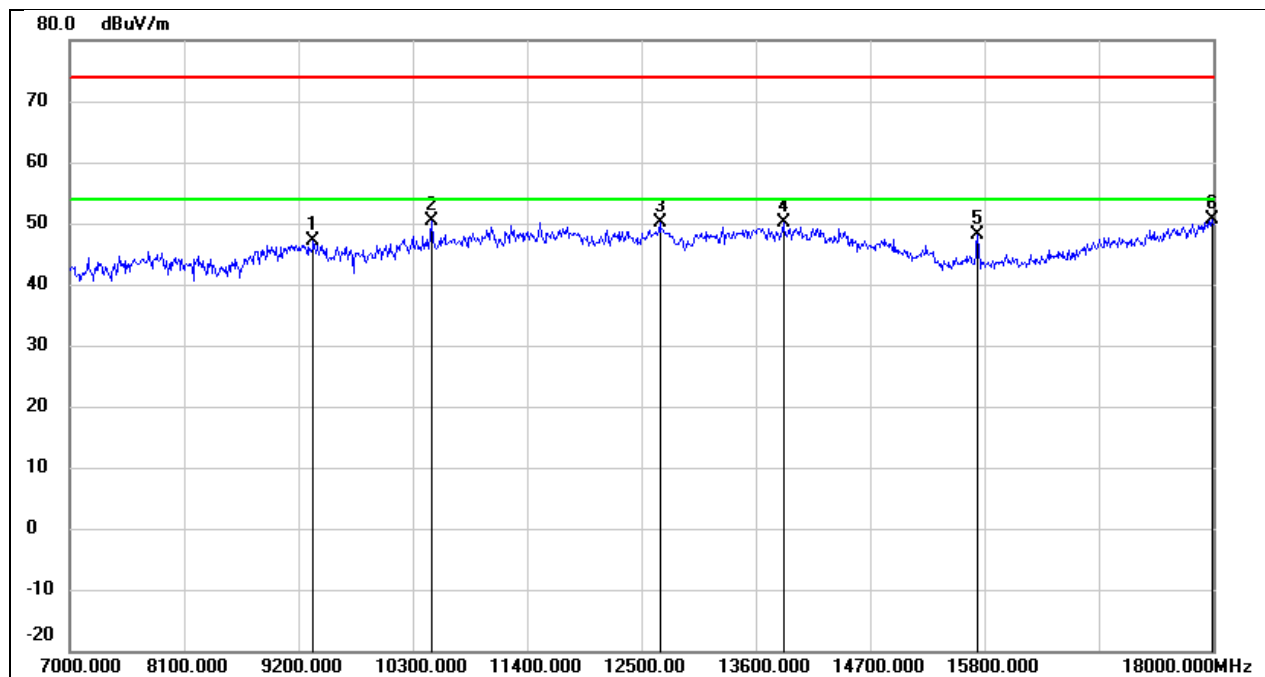


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.49	10.55	47.04	74.00	-26.96	peak
2	10476.000	37.70	12.77	50.47	74.00	-23.53	peak
3	12676.000	31.99	18.05	50.04	74.00	-23.96	peak
4	13864.000	28.51	21.53	50.04	74.00	-23.96	peak
5	15734.000	31.21	16.81	48.02	74.00	-25.98	peak
6	17989.000	24.50	26.04	50.54	74.00	-23.46	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

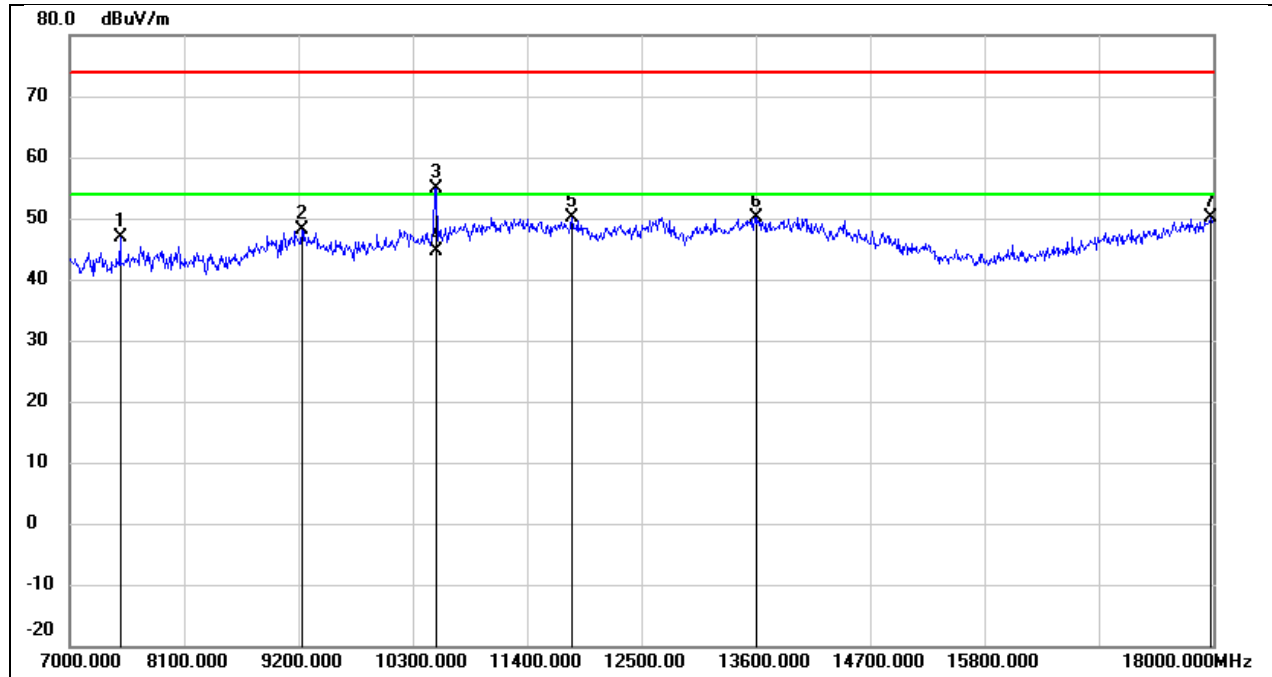


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7484.000	40.04	6.87	46.91	74.00	-27.09	peak
2	9233.000	37.71	10.48	48.19	74.00	-25.81	peak
3	10531.000	42.06	12.94	55.00	74.00	-19.00	peak
4	10531.000	31.75	12.94	44.69	54.00	-9.31	AVG
5	11829.000	32.67	17.38	50.05	74.00	-23.95	peak
6	13611.000	29.11	20.92	50.03	74.00	-23.97	peak
7	17978.000	24.10	25.97	50.07	74.00	-23.93	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3 V

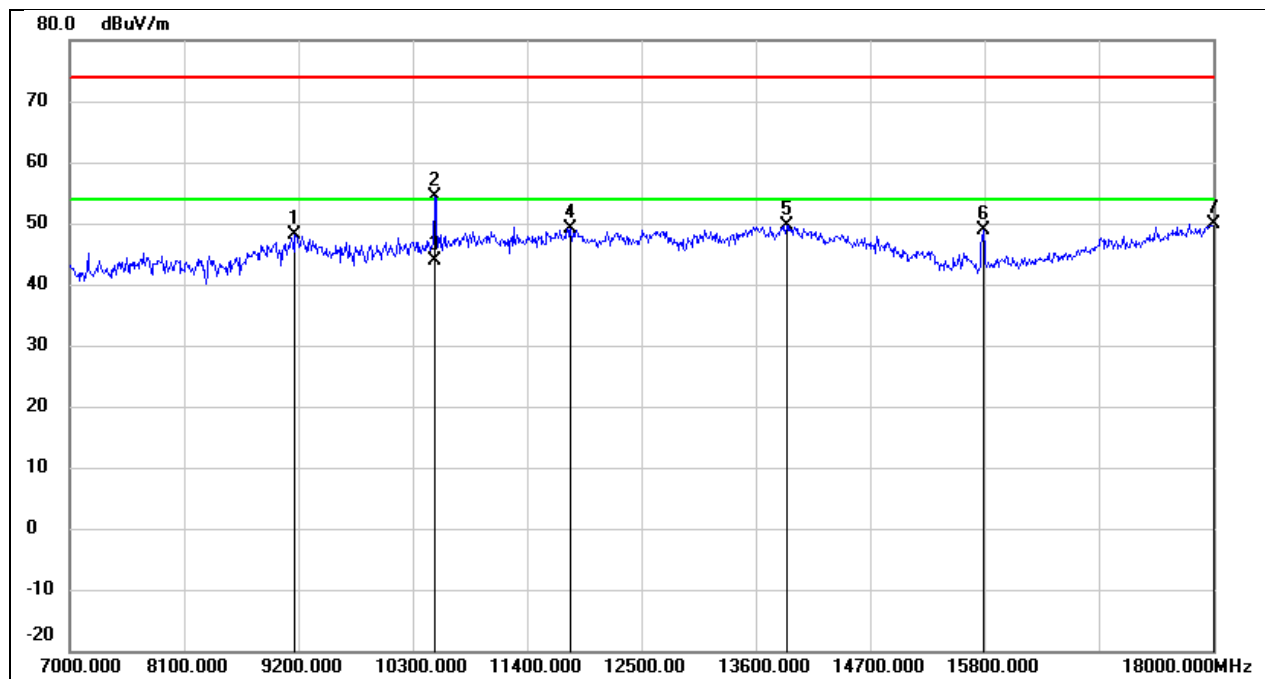


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.73	10.45	48.18	74.00	-25.82	peak
2	10509.000	41.51	12.85	54.36	74.00	-19.64	peak
3	10509.000	31.00	12.85	43.85	54.00	-10.15	AVG
4	11818.000	31.84	17.36	49.20	74.00	-24.80	peak
5	13897.000	28.03	21.62	49.65	74.00	-24.35	peak
6	15789.000	32.03	16.84	48.87	74.00	-25.13	peak
7	18000.000	23.71	26.12	49.83	74.00	-24.17	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

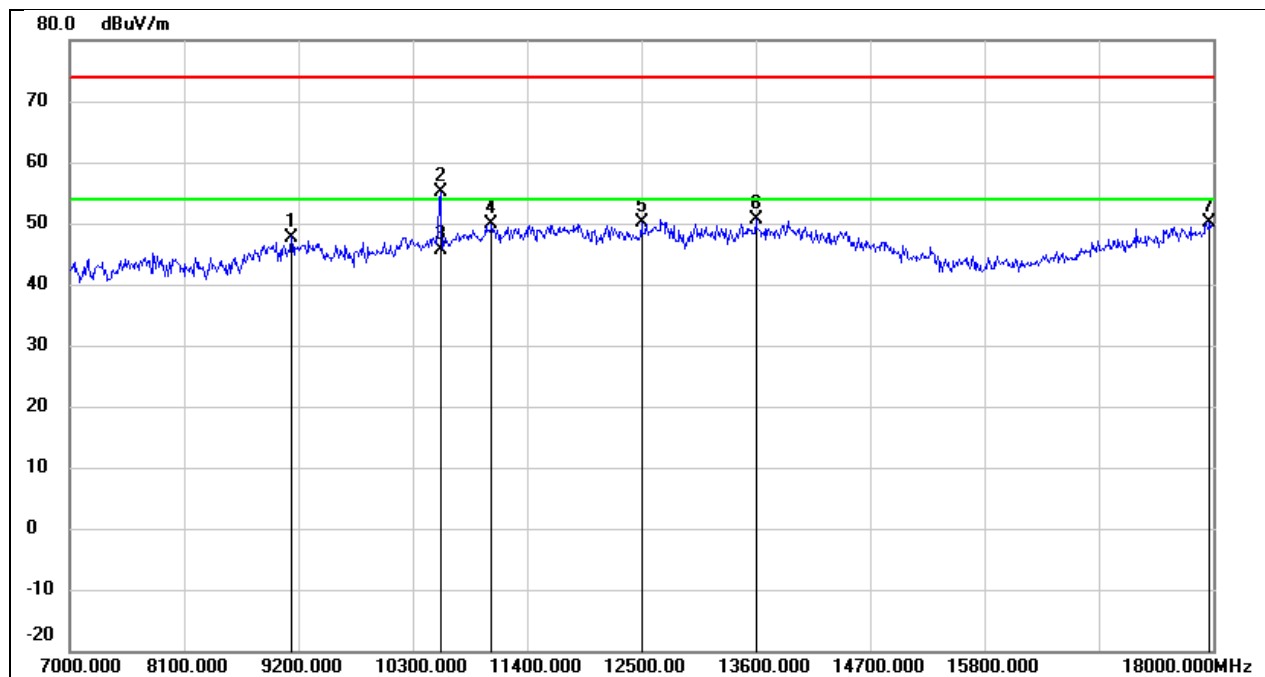


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.34	10.41	47.75	74.00	-26.25	peak
2	10564.000	42.14	13.06	55.20	74.00	-18.80	peak
3	10564.000	32.65	13.06	45.71	54.00	-8.29	AVG
4	11059.000	34.92	14.96	49.88	74.00	-24.12	peak
5	12500.000	32.34	17.83	50.17	74.00	-23.83	peak
6	13600.000	29.85	20.89	50.74	74.00	-23.26	peak
7	17967.000	24.27	25.89	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3 V

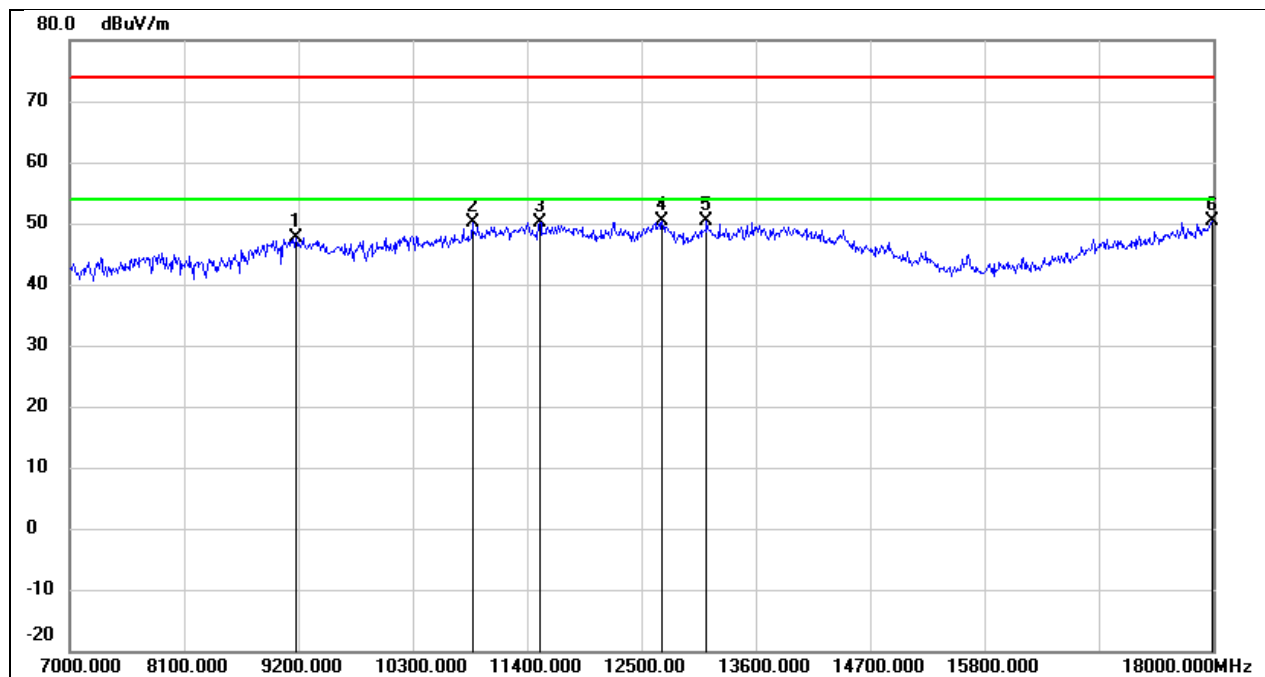


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.30	10.45	47.75	74.00	-26.25	peak
2	10872.000	35.78	14.23	50.01	74.00	-23.99	peak
3	11521.000	33.36	16.82	50.18	74.00	-23.82	peak
4	12698.000	32.20	18.08	50.28	74.00	-23.72	peak
5	13127.000	31.34	19.01	50.35	74.00	-23.65	peak
6	17989.000	24.42	26.04	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

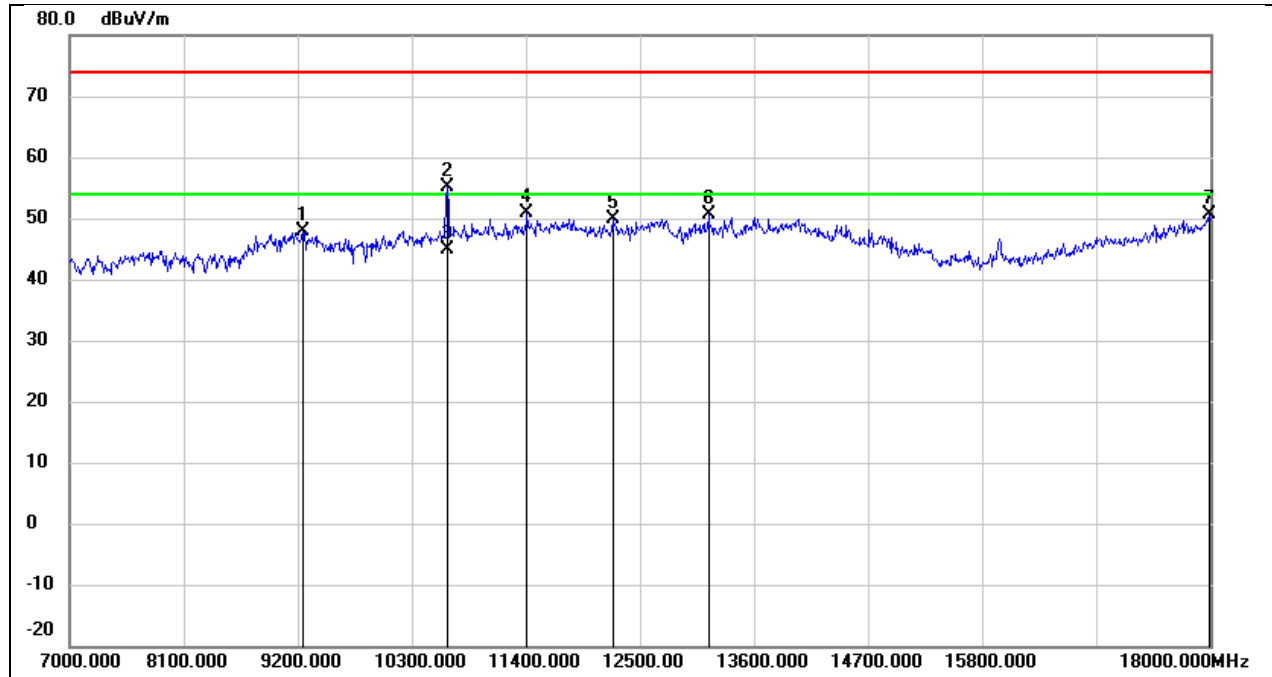


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.38	10.49	47.87	74.00	-26.13	peak
2	10641.000	41.69	13.36	55.05	74.00	-18.95	peak
3	10641.000	31.43	13.36	44.79	54.00	-9.21	AVG
4	11411.000	34.42	16.41	50.83	74.00	-23.17	peak
5	12236.000	32.21	17.76	49.97	74.00	-24.03	peak
6	13160.000	31.37	19.15	50.52	74.00	-23.48	peak
7	17989.000	24.70	26.04	50.74	74.00	-23.26	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3 V

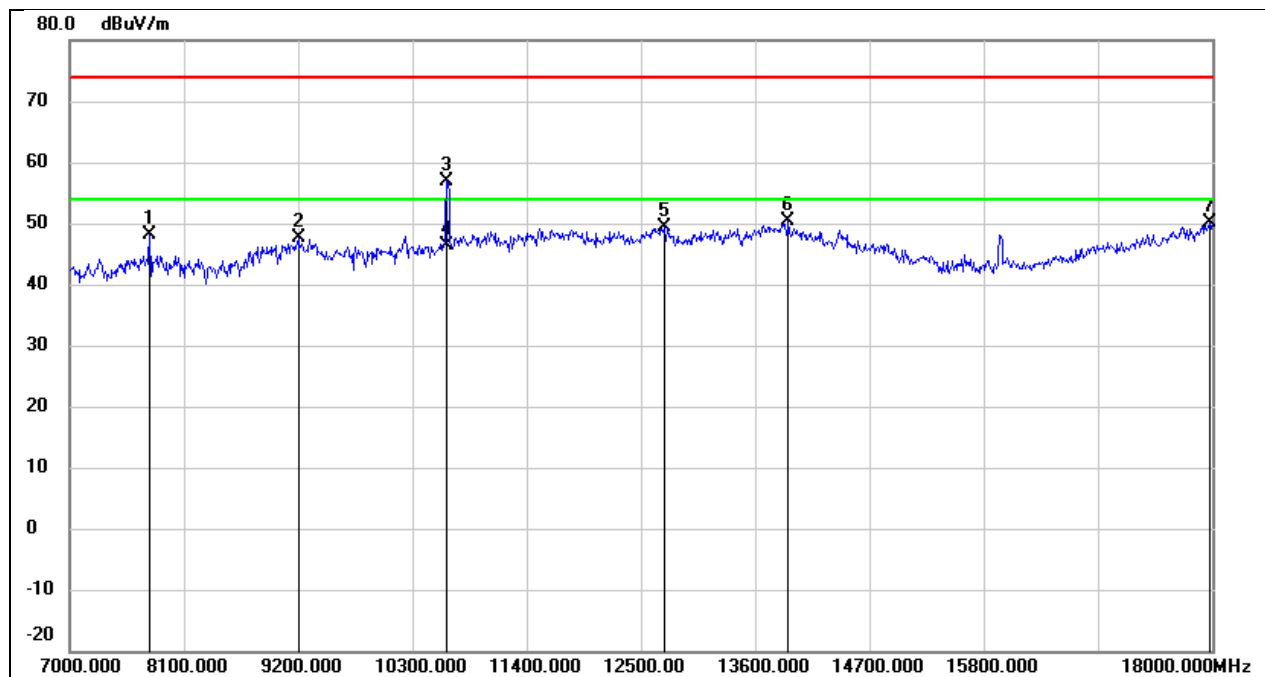


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	41.50	6.63	48.13	74.00	-25.87	peak
2	9200.000	37.10	10.46	47.56	74.00	-26.44	peak
3	10630.000	43.69	13.31	57.00	74.00	-17.00	peak
4	10630.000	33.01	13.31	46.32	54.00	-7.68	AVG
5	12731.000	31.36	18.12	49.48	74.00	-24.52	peak
6	13919.000	28.76	21.68	50.44	74.00	-23.56	peak
7	17978.000	24.23	25.97	50.20	74.00	-23.80	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

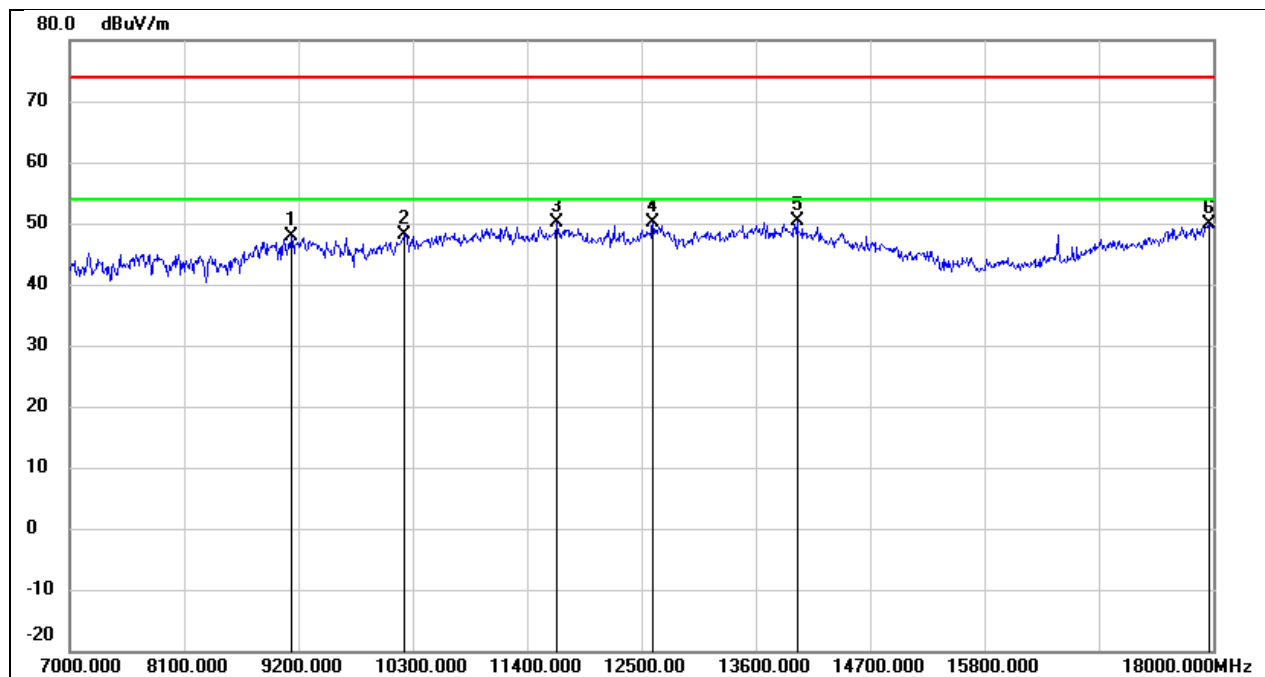


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.38	10.41	47.79	74.00	-26.21	peak
2	10212.000	35.99	12.21	48.20	74.00	-25.80	peak
3	11686.000	33.10	17.12	50.22	74.00	-23.78	peak
4	12610.000	32.20	17.97	50.17	74.00	-23.83	peak
5	13996.000	28.42	21.87	50.29	74.00	-23.71	peak
6	17956.000	23.98	25.82	49.80	74.00	-24.20	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3 V

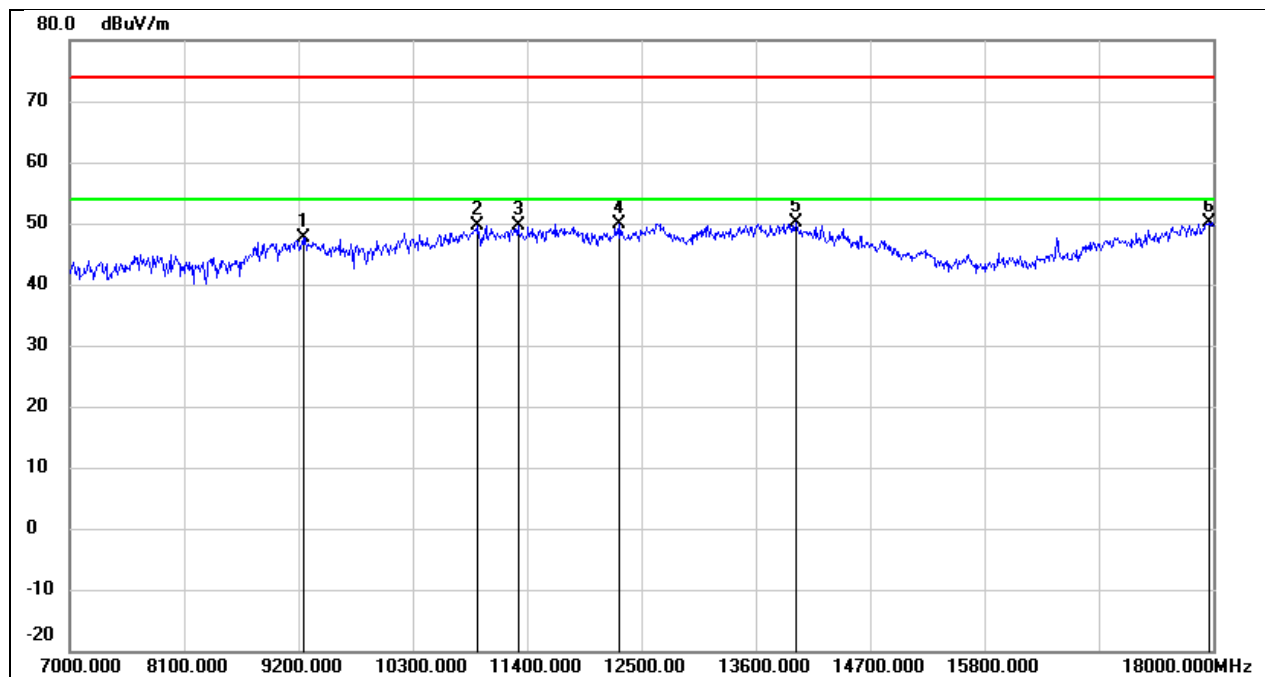


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.23	10.51	47.74	74.00	-26.26	peak
2	10916.000	35.23	14.39	49.62	74.00	-24.38	peak
3	11312.000	33.70	16.00	49.70	74.00	-24.30	peak
4	12291.000	32.22	17.78	50.00	74.00	-24.00	peak
5	13985.000	28.31	21.85	50.16	74.00	-23.84	peak
6	17956.000	24.33	25.82	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

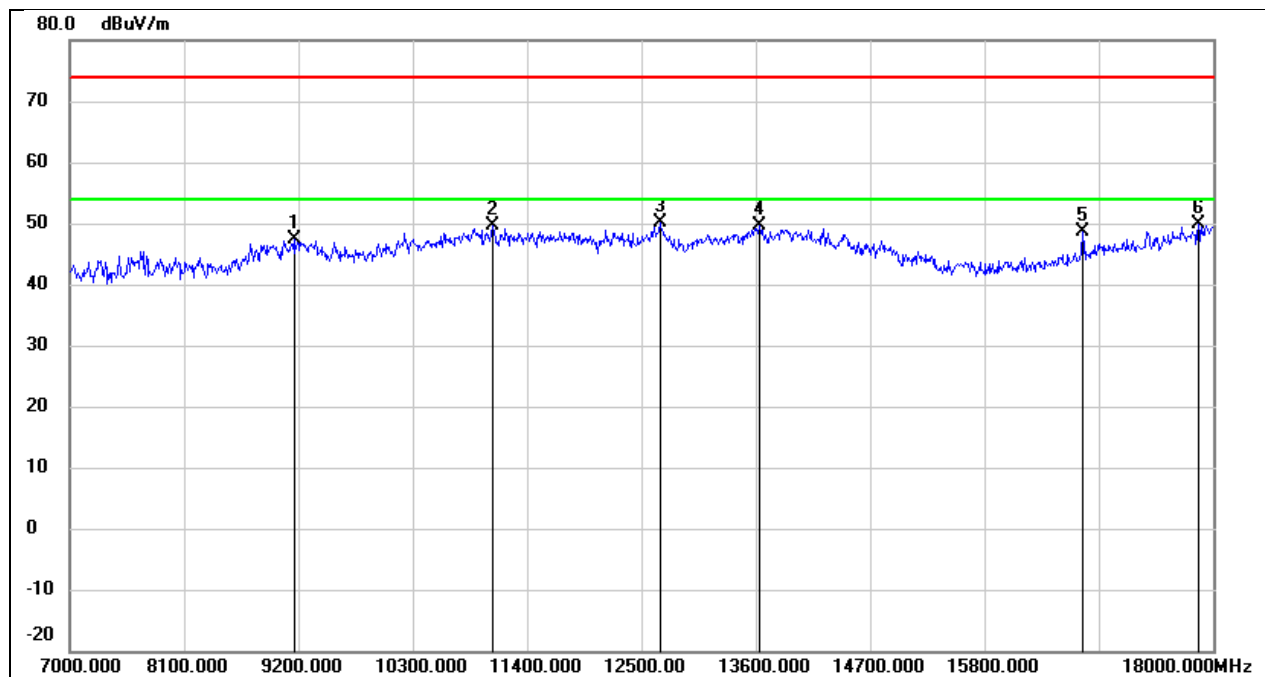


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.88	10.45	47.33	74.00	-26.67	peak
2	11070.000	34.54	15.01	49.55	74.00	-24.45	peak
3	12676.000	31.99	18.05	50.04	74.00	-23.96	peak
4	13633.000	28.54	20.97	49.51	74.00	-24.49	peak
5	16746.000	29.08	19.45	48.53	74.00	-25.47	peak
6	17857.000	24.73	25.14	49.87	74.00	-24.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3 V

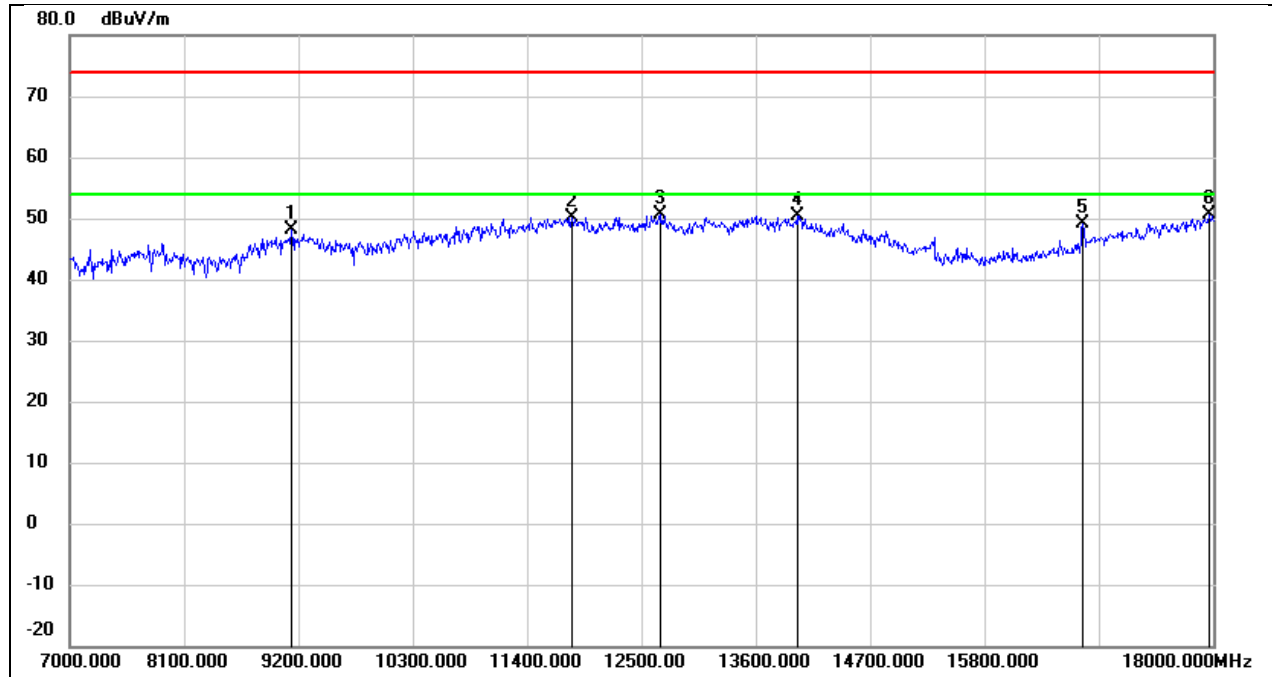


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.70	10.41	48.11	74.00	-25.89	peak
2	11829.000	32.86	17.38	50.24	74.00	-23.76	peak
3	12687.000	32.61	18.05	50.66	74.00	-23.34	peak
4	13996.000	28.50	21.87	50.37	74.00	-23.63	peak
5	16746.000	29.67	19.45	49.12	74.00	-24.88	peak
6	17967.000	24.71	25.89	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

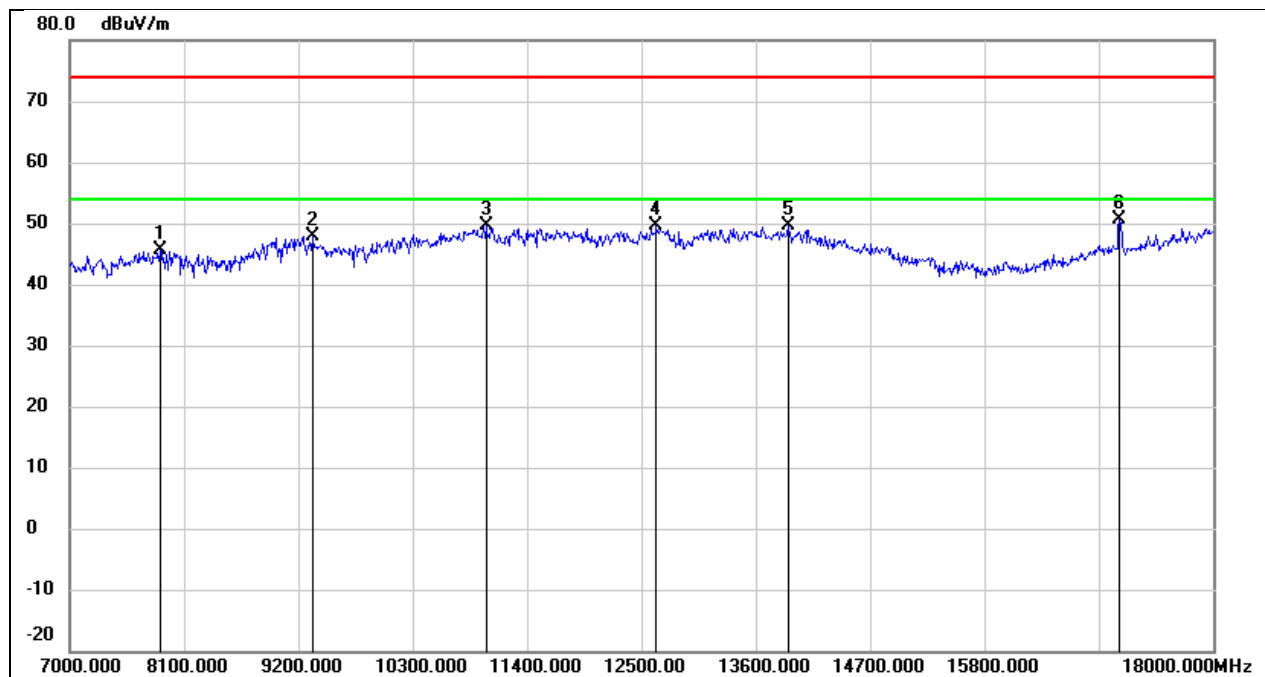


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.09	6.54	45.63	74.00	-28.37	peak
2	9332.000	37.37	10.54	47.91	74.00	-26.09	peak
3	11004.000	34.95	14.74	49.69	74.00	-24.31	peak
4	12643.000	31.62	18.01	49.63	74.00	-24.37	peak
5	13908.000	27.93	21.66	49.59	74.00	-24.41	peak
6	17098.000	29.64	21.02	50.66	74.00	-23.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3 V

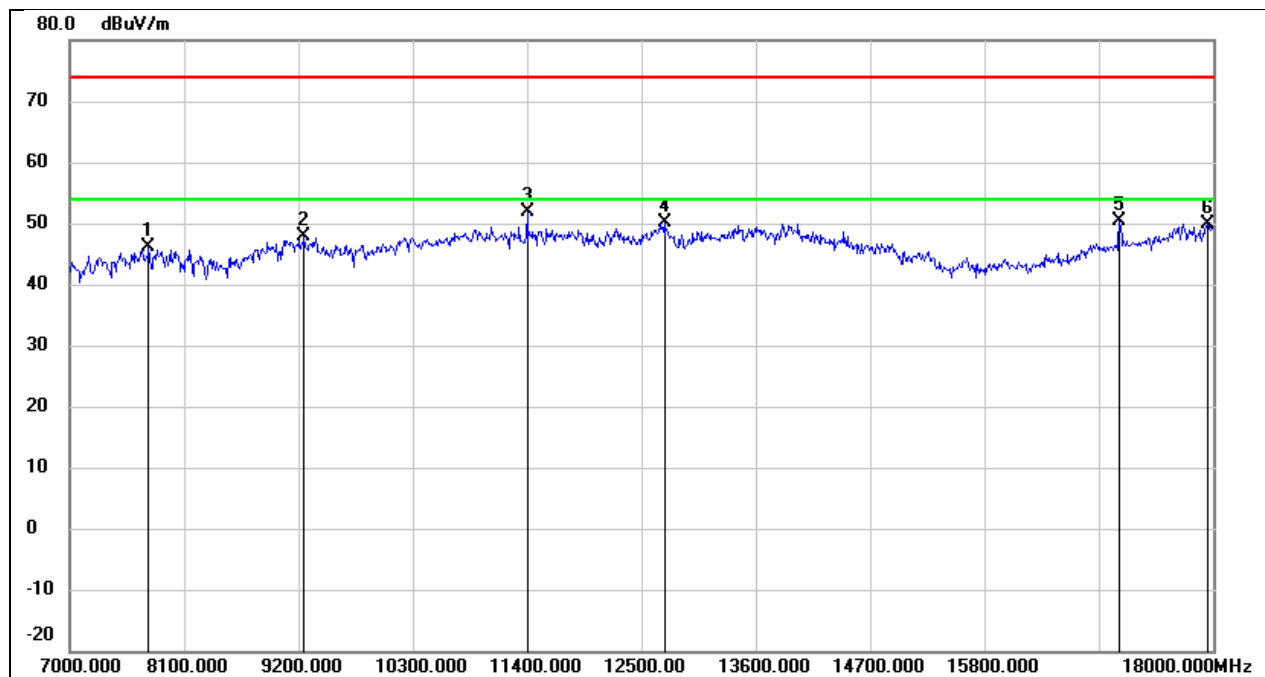


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	39.43	6.64	46.07	74.00	-27.93	peak
2	9255.000	37.38	10.51	47.89	74.00	-26.11	peak
3	11400.000	35.61	16.36	51.97	74.00	-22.03	peak
4	12720.000	32.11	18.09	50.20	74.00	-23.80	peak
5	17098.000	29.34	21.02	50.36	74.00	-23.64	peak
6	17945.000	24.13	25.75	49.88	74.00	-24.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

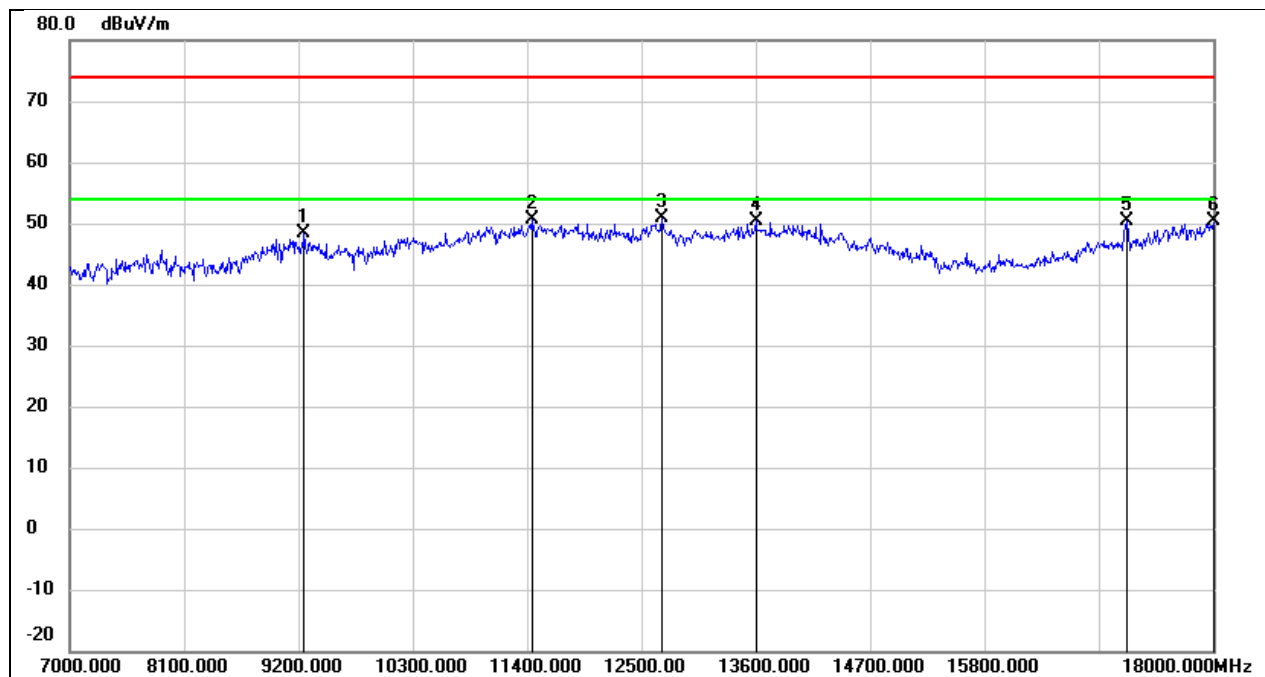


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.82	10.51	48.33	74.00	-25.67	peak
2	11444.000	34.03	16.53	50.56	74.00	-23.44	peak
3	12698.000	32.76	18.08	50.84	74.00	-23.16	peak
4	13600.000	29.48	20.89	50.37	74.00	-23.63	peak
5	17164.000	29.02	21.29	50.31	74.00	-23.69	peak
6	18000.000	24.29	26.12	50.41	74.00	-23.59	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

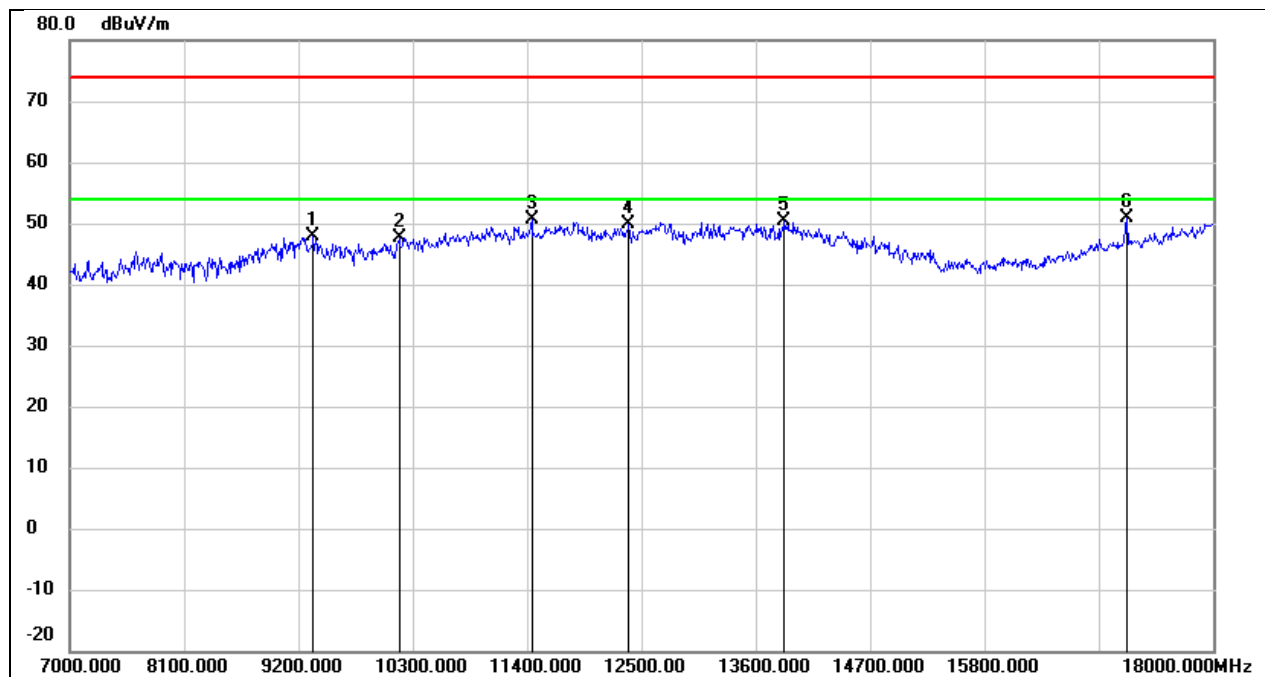


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.23	10.55	47.78	74.00	-26.22	peak
2	10168.000	35.54	12.13	47.67	74.00	-26.33	peak
3	11444.000	34.06	16.53	50.59	74.00	-23.41	peak
4	12379.000	32.15	17.80	49.95	74.00	-24.05	peak
5	13875.000	28.76	21.57	50.33	74.00	-23.67	peak
6	17164.000	29.53	21.29	50.82	74.00	-23.18	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

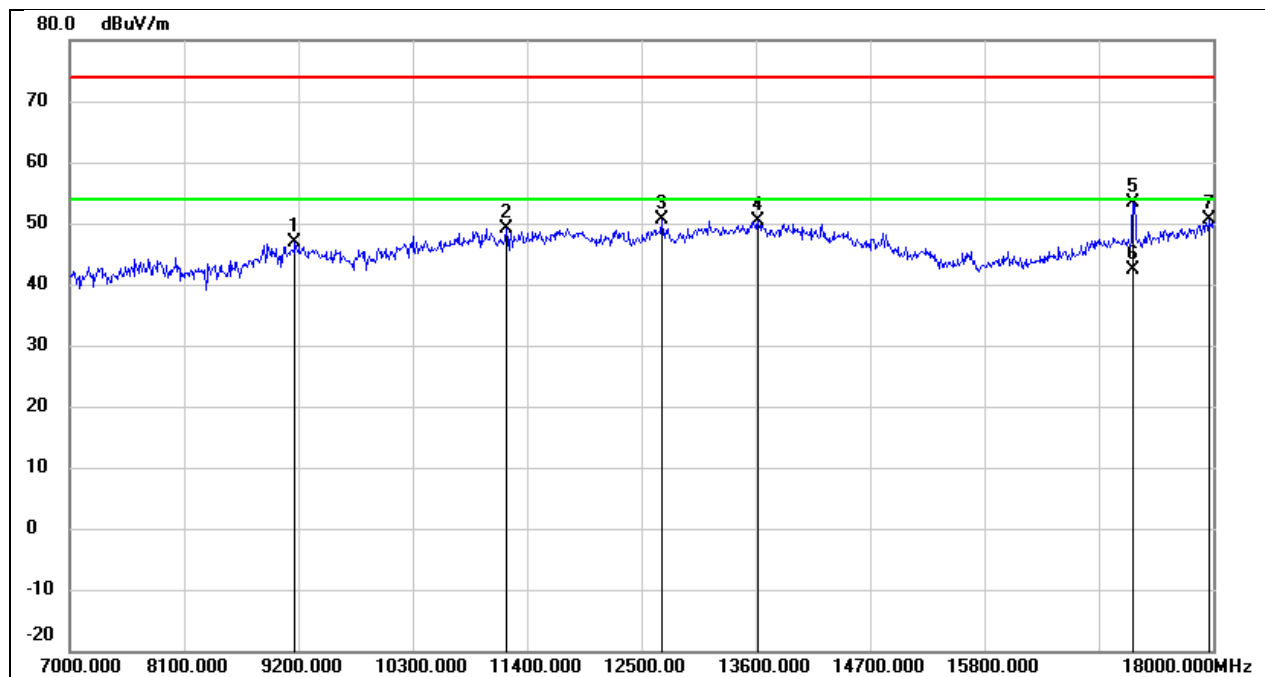


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.32	10.45	46.77	74.00	-27.23	peak
2	11202.000	33.59	15.55	49.14	74.00	-24.86	peak
3	12698.000	32.43	18.08	50.51	74.00	-23.49	peak
4	13622.000	29.40	20.95	50.35	74.00	-23.65	peak
5	17230.000	31.84	21.57	53.41	74.00	-20.59	peak
6	17230.000	20.89	21.57	42.46	54.00	-11.54	AVG
7	17956.000	24.69	25.82	50.51	74.00	-23.49	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

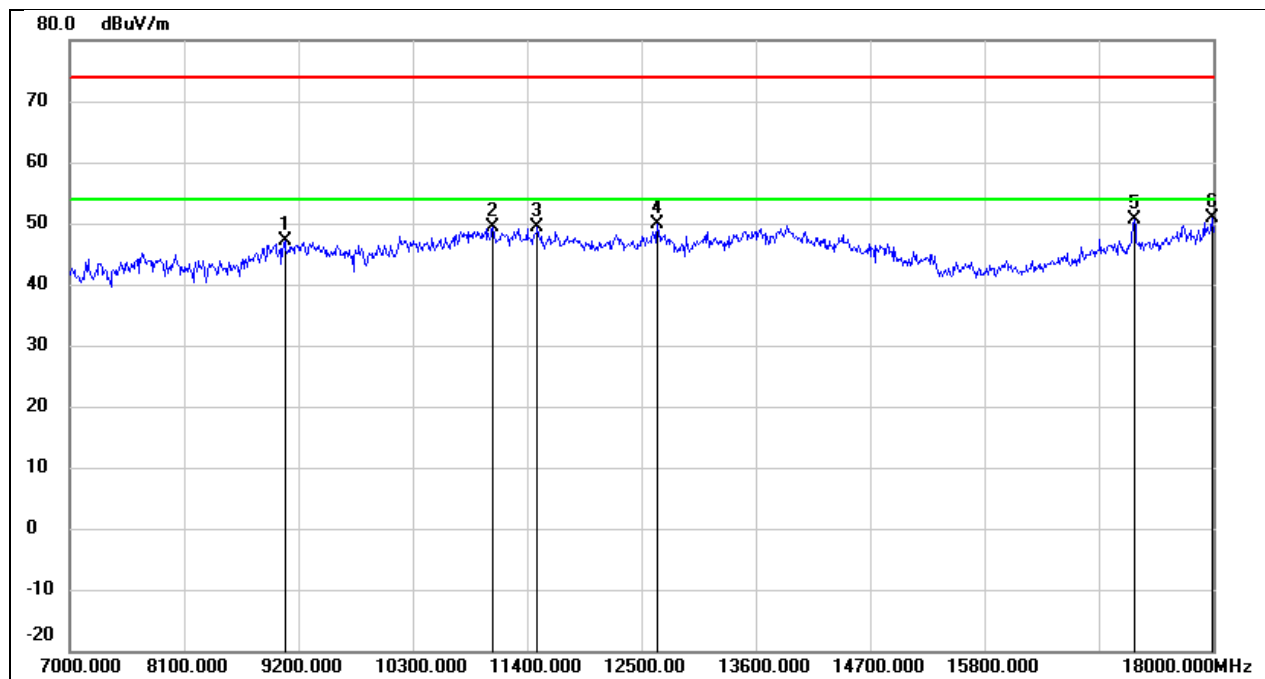


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.63	10.39	47.02	74.00	-26.98	peak
2	11070.000	34.26	15.01	49.27	74.00	-24.73	peak
3	11499.000	32.57	16.77	49.34	74.00	-24.66	peak
4	12654.000	31.92	18.01	49.93	74.00	-24.07	peak
5	17241.000	28.91	21.62	50.53	74.00	-23.47	peak
6	17989.000	24.84	26.04	50.88	74.00	-23.12	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

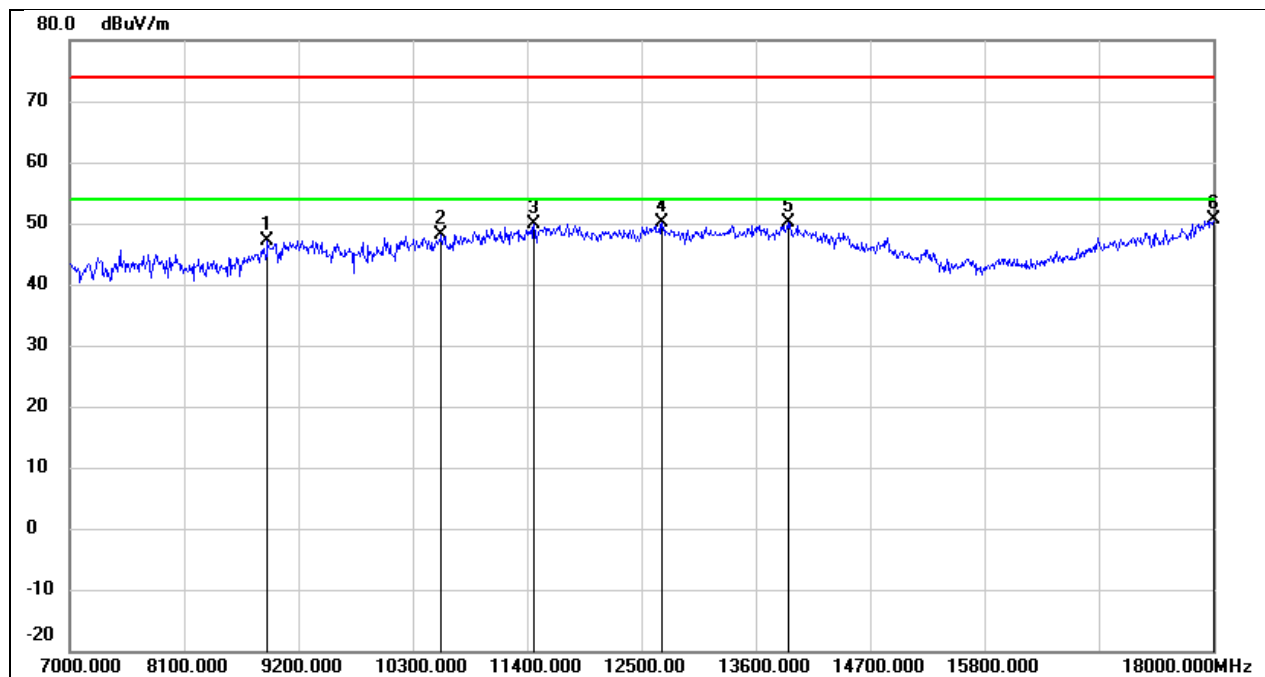


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	37.51	9.66	47.17	74.00	-26.83	peak
2	10575.000	35.11	13.10	48.21	74.00	-25.79	peak
3	11466.000	33.25	16.63	49.88	74.00	-24.12	peak
4	12698.000	32.15	18.08	50.23	74.00	-23.77	peak
5	13908.000	28.48	21.66	50.14	74.00	-23.86	peak
6	18000.000	24.41	26.12	50.53	74.00	-23.47	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

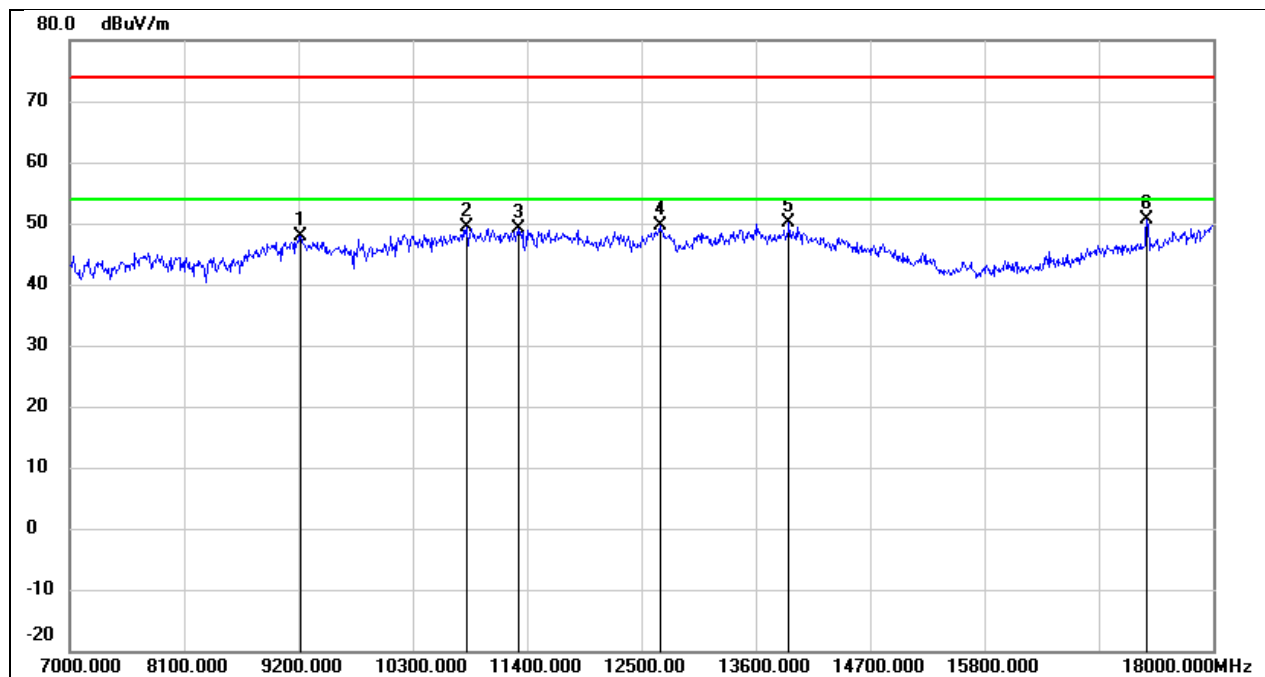


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.50	10.48	47.98	74.00	-26.02	peak
2	10817.000	35.27	14.03	49.30	74.00	-24.70	peak
3	11323.000	33.01	16.05	49.06	74.00	-24.94	peak
4	12676.000	31.64	18.05	49.69	74.00	-24.31	peak
5	13919.000	28.52	21.68	50.20	74.00	-23.80	peak
6	17362.000	28.51	22.12	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

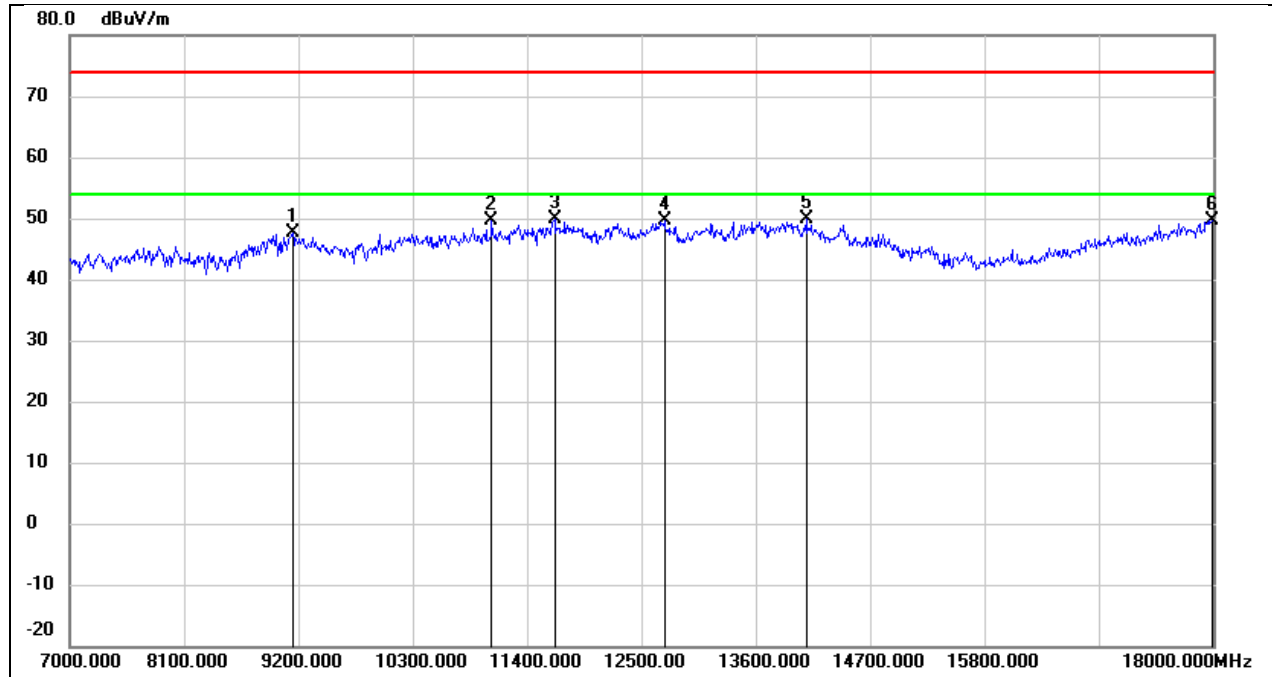


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.20	10.43	47.63	74.00	-26.37	peak
2	11059.000	34.70	14.96	49.66	74.00	-24.34	peak
3	11664.000	32.79	17.08	49.87	74.00	-24.13	peak
4	12720.000	31.42	18.09	49.51	74.00	-24.49	peak
5	14084.000	28.27	21.52	49.79	74.00	-24.21	peak
6	17989.000	23.61	26.04	49.65	74.00	-24.35	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

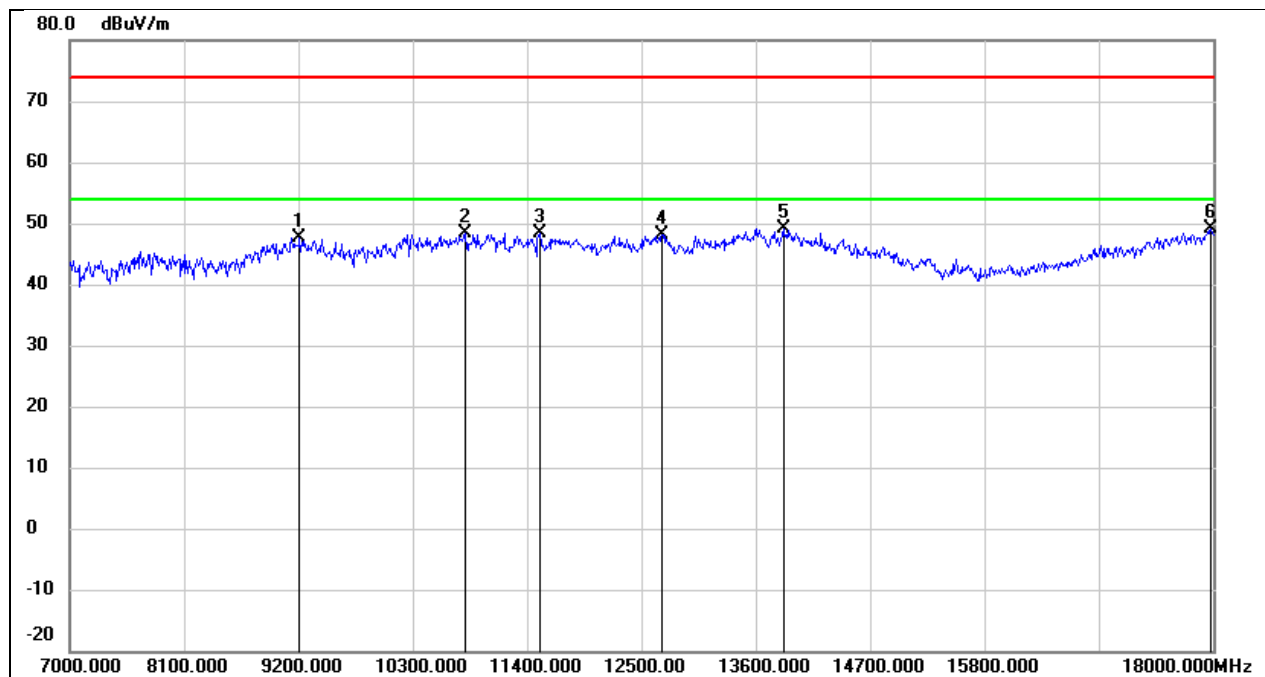


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.16	10.47	47.63	74.00	-26.37	peak
2	10806.000	34.48	13.98	48.46	74.00	-25.54	peak
3	11521.000	31.52	16.82	48.34	74.00	-25.66	peak
4	12698.000	29.97	18.08	48.05	74.00	-25.95	peak
5	13864.000	27.63	21.53	49.16	74.00	-24.84	peak
6	17978.000	23.20	25.97	49.17	74.00	-24.83	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

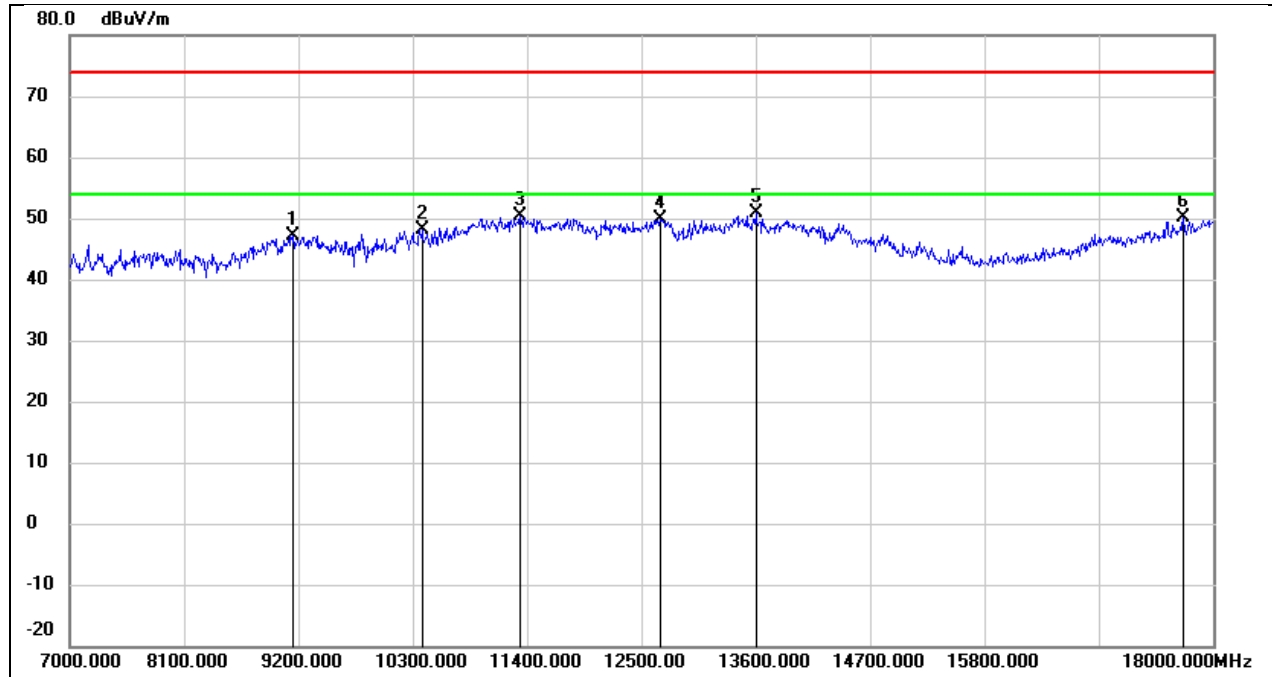


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.79	10.43	47.22	74.00	-26.78	peak
2	10388.000	35.61	12.59	48.20	74.00	-25.80	peak
3	11334.000	34.29	16.09	50.38	74.00	-23.62	peak
4	12687.000	31.92	18.05	49.97	74.00	-24.03	peak
5	13600.000	29.89	20.89	50.78	74.00	-23.22	peak
6	17714.000	26.07	24.16	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3 V

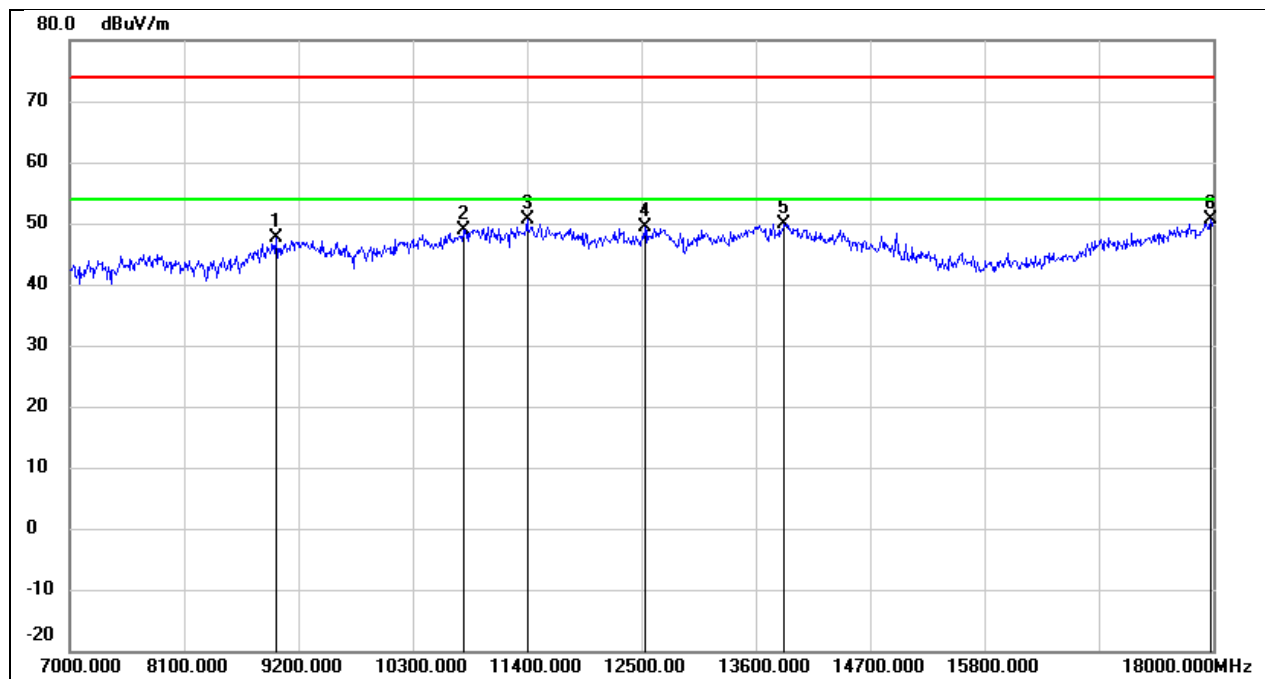


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.32	10.28	47.60	74.00	-26.40	peak
2	10784.000	35.06	13.91	48.97	74.00	-25.03	peak
3	11400.000	34.22	16.36	50.58	74.00	-23.42	peak
4	12533.000	31.39	17.87	49.26	74.00	-24.74	peak
5	13875.000	28.35	21.57	49.92	74.00	-24.08	peak
6	17978.000	24.61	25.97	50.58	74.00	-23.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

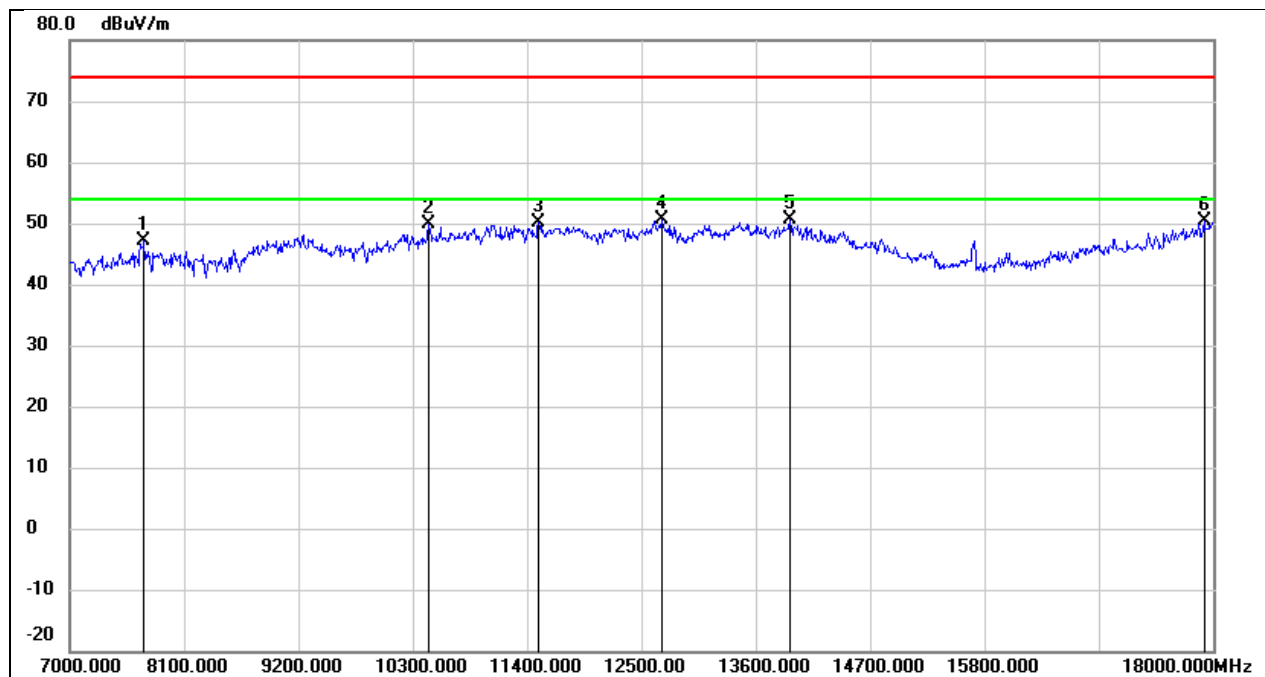


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	40.50	6.68	47.18	74.00	-26.82	peak
2	10454.000	37.11	12.73	49.84	74.00	-24.16	peak
3	11510.000	33.28	16.79	50.07	74.00	-23.93	peak
4	12698.000	32.45	18.08	50.53	74.00	-23.47	peak
5	13930.000	28.80	21.71	50.51	74.00	-23.49	peak
6	17912.000	24.82	25.52	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3 V

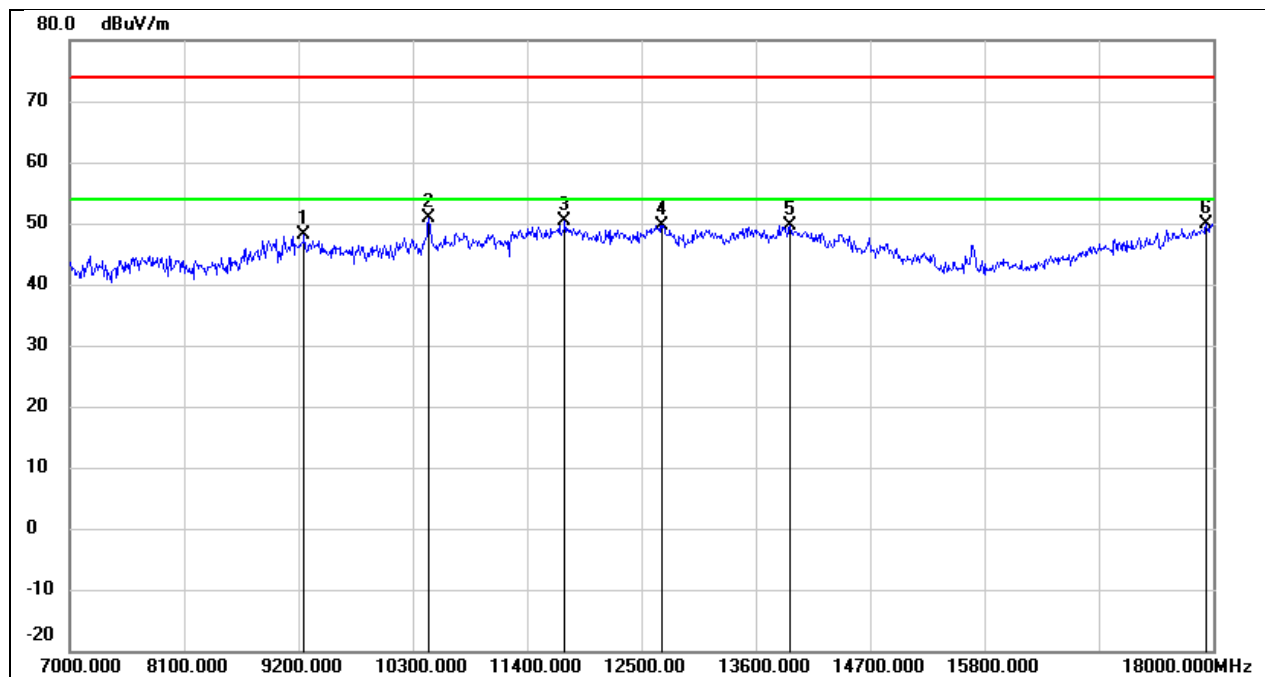


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.51	10.51	48.02	74.00	-25.98	peak
2	10454.000	38.07	12.73	50.80	74.00	-23.20	peak
3	11763.000	33.01	17.26	50.27	74.00	-23.73	peak
4	12698.000	31.61	18.08	49.69	74.00	-24.31	peak
5	13930.000	27.87	21.71	49.58	74.00	-24.42	peak
6	17934.000	24.29	25.67	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

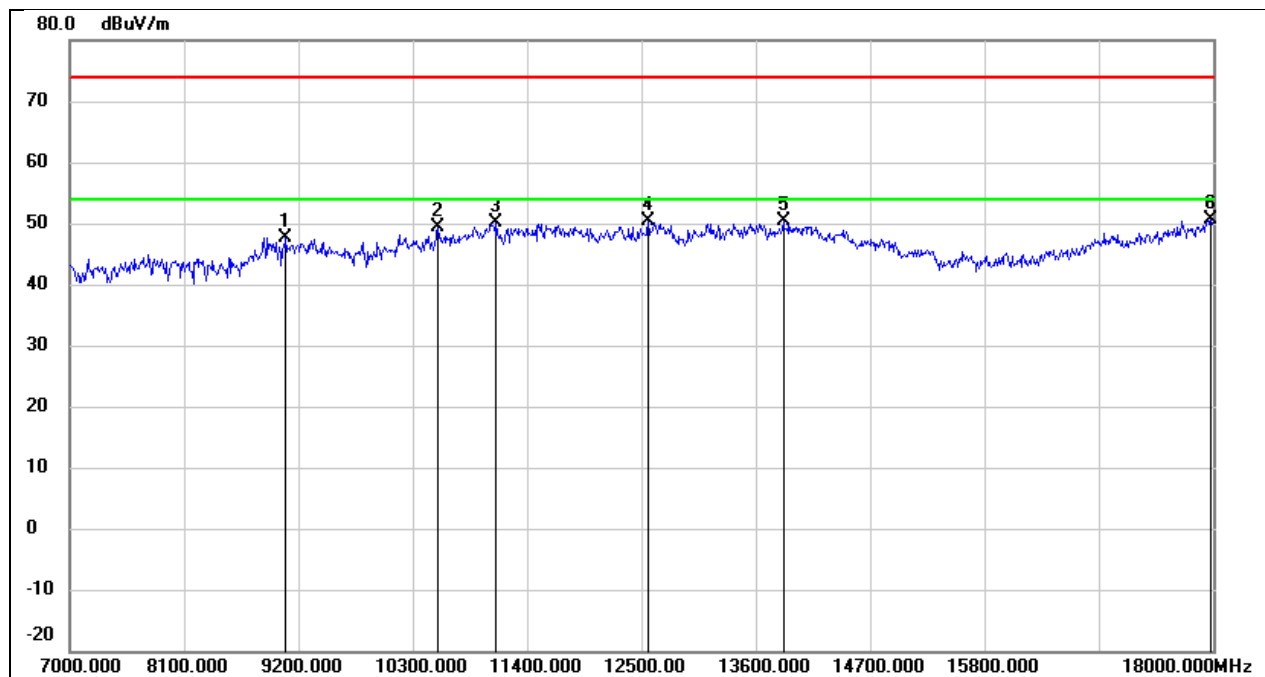


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	37.33	10.39	47.72	74.00	-26.28	peak
2	10542.000	36.30	12.98	49.28	74.00	-24.72	peak
3	11103.000	34.91	15.15	50.06	74.00	-23.94	peak
4	12566.000	32.46	17.91	50.37	74.00	-23.63	peak
5	13864.000	28.94	21.53	50.47	74.00	-23.53	peak
6	17978.000	24.65	25.97	50.62	74.00	-23.38	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3 V

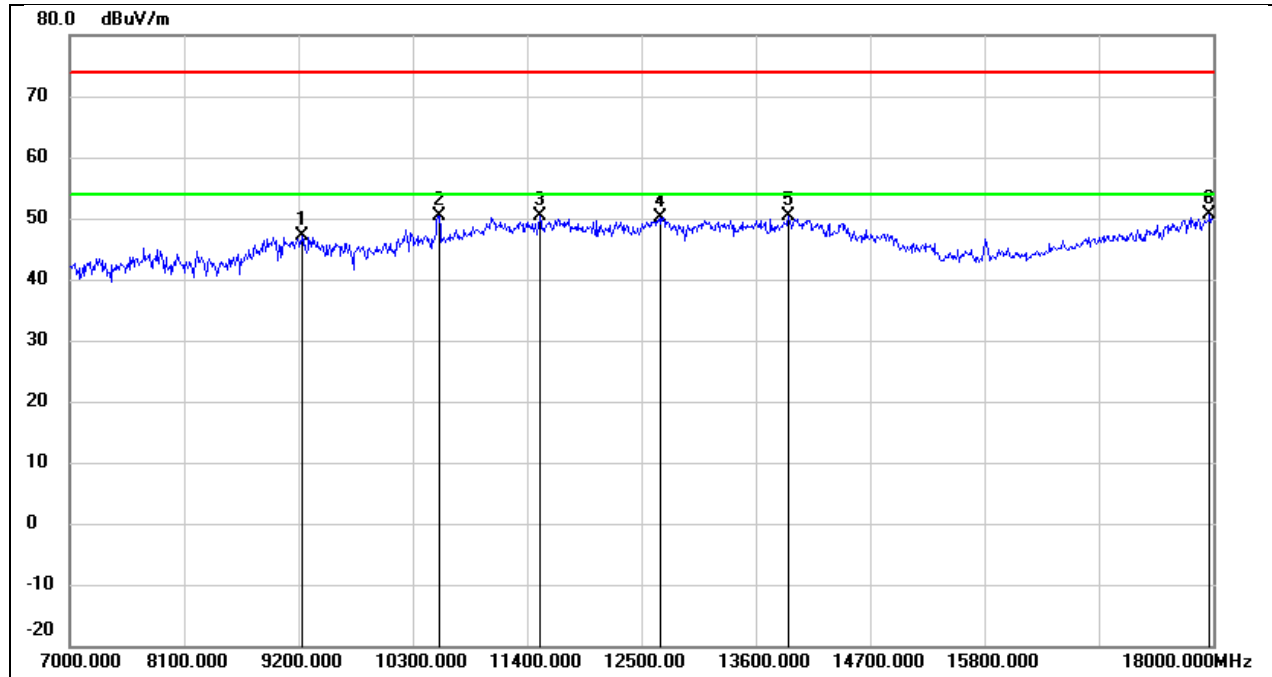


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.67	10.48	47.15	74.00	-26.85	peak
2	10553.000	37.33	13.02	50.35	74.00	-23.65	peak
3	11521.000	33.50	16.82	50.32	74.00	-23.68	peak
4	12687.000	32.20	18.05	50.25	74.00	-23.75	peak
5	13908.000	28.83	21.66	50.49	74.00	-23.51	peak
6	17967.000	24.66	25.89	50.55	74.00	-23.45	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

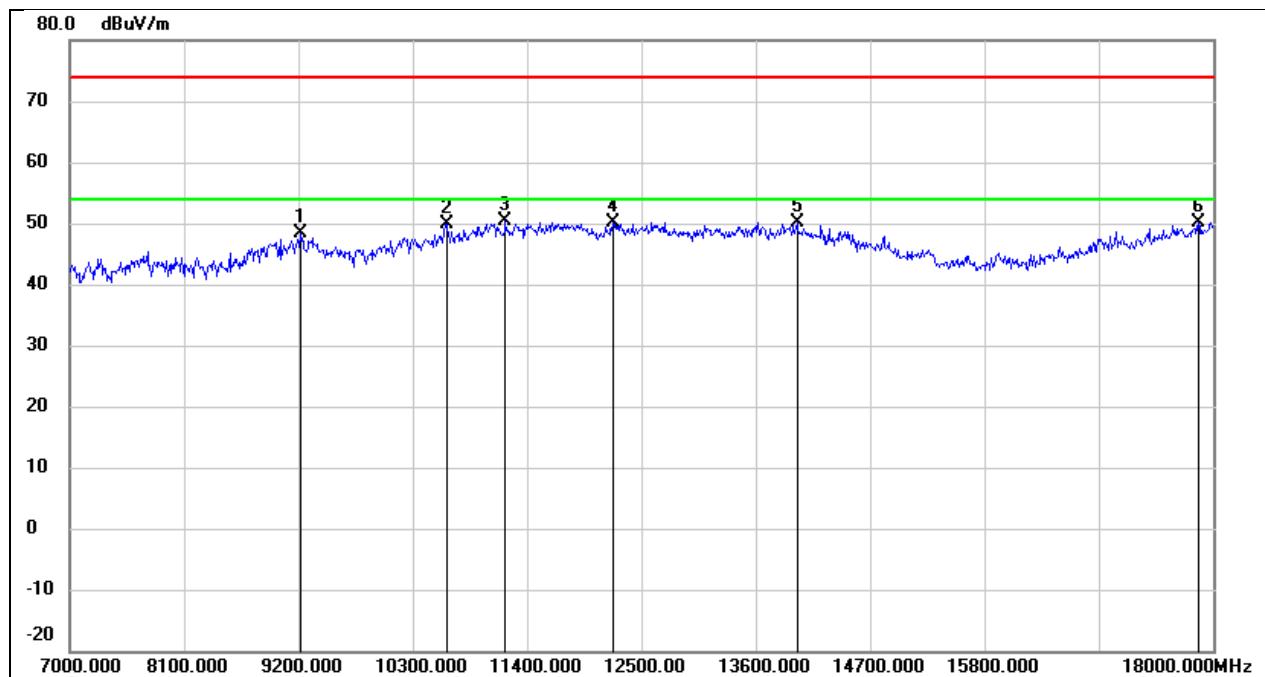


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.78	10.48	48.26	74.00	-25.74	peak
2	10630.000	36.54	13.31	49.85	74.00	-24.15	peak
3	11191.000	34.83	15.50	50.33	74.00	-23.67	peak
4	12225.000	32.40	17.75	50.15	74.00	-23.85	peak
5	13996.000	28.31	21.87	50.18	74.00	-23.82	peak
6	17857.000	24.99	25.14	50.13	74.00	-23.87	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3 V

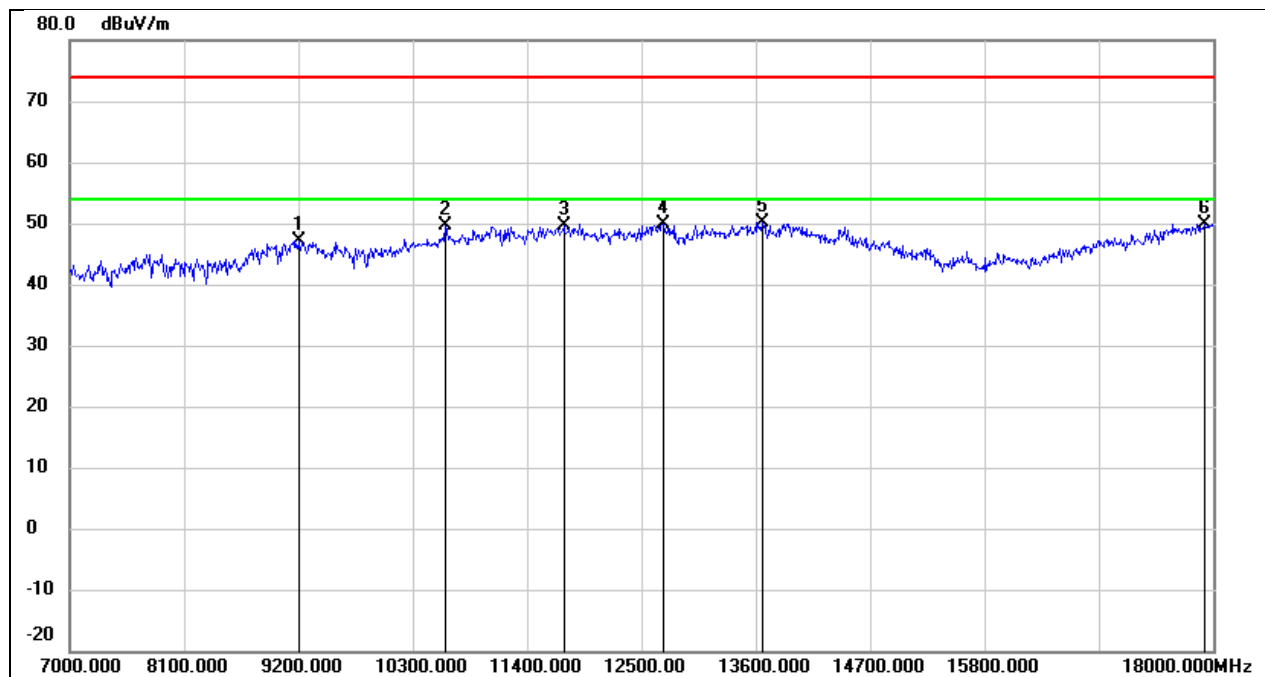


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	36.78	10.46	47.24	74.00	-26.76	peak
2	10619.000	36.28	13.28	49.56	74.00	-24.44	peak
3	11752.000	32.36	17.24	49.60	74.00	-24.40	peak
4	12709.000	31.78	18.09	49.87	74.00	-24.13	peak
5	13666.000	29.20	21.05	50.25	74.00	-23.75	peak
6	17912.000	24.48	25.52	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

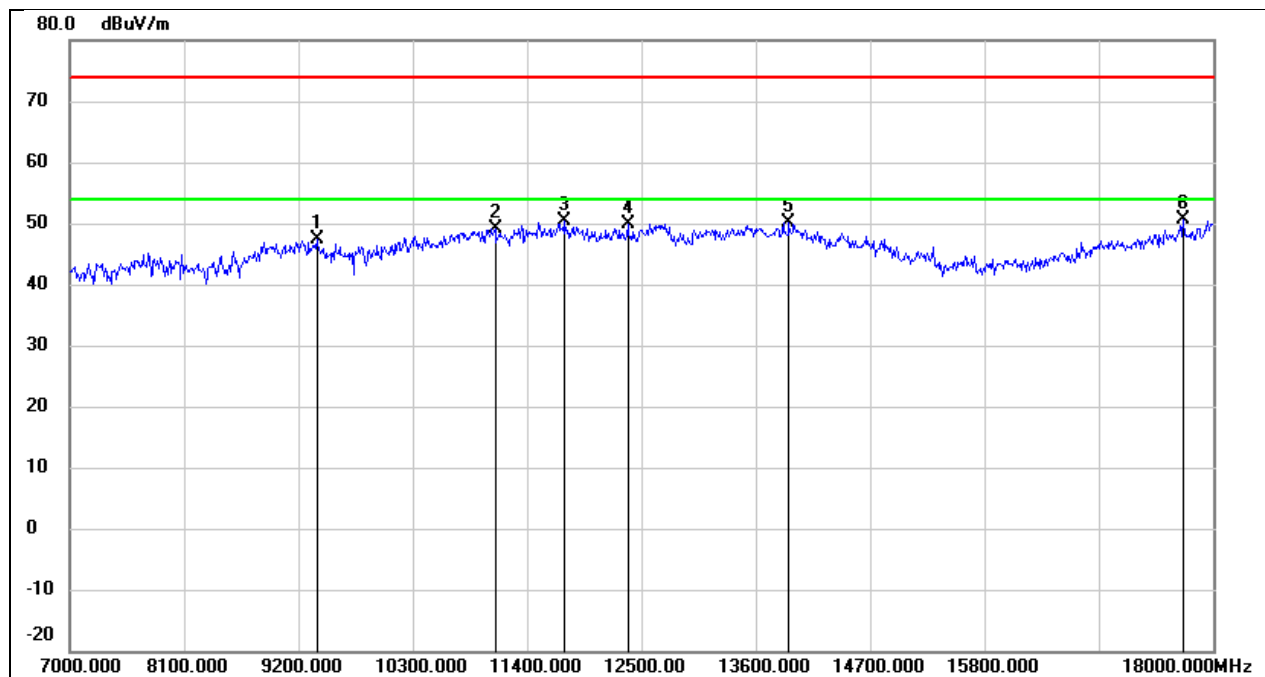


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	36.72	10.58	47.30	74.00	-26.70	peak
2	11092.000	34.14	15.10	49.24	74.00	-24.76	peak
3	11763.000	33.09	17.26	50.35	74.00	-23.65	peak
4	12368.000	32.03	17.80	49.83	74.00	-24.17	peak
5	13919.000	28.52	21.68	50.20	74.00	-23.80	peak
6	17714.000	26.59	24.16	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3 V

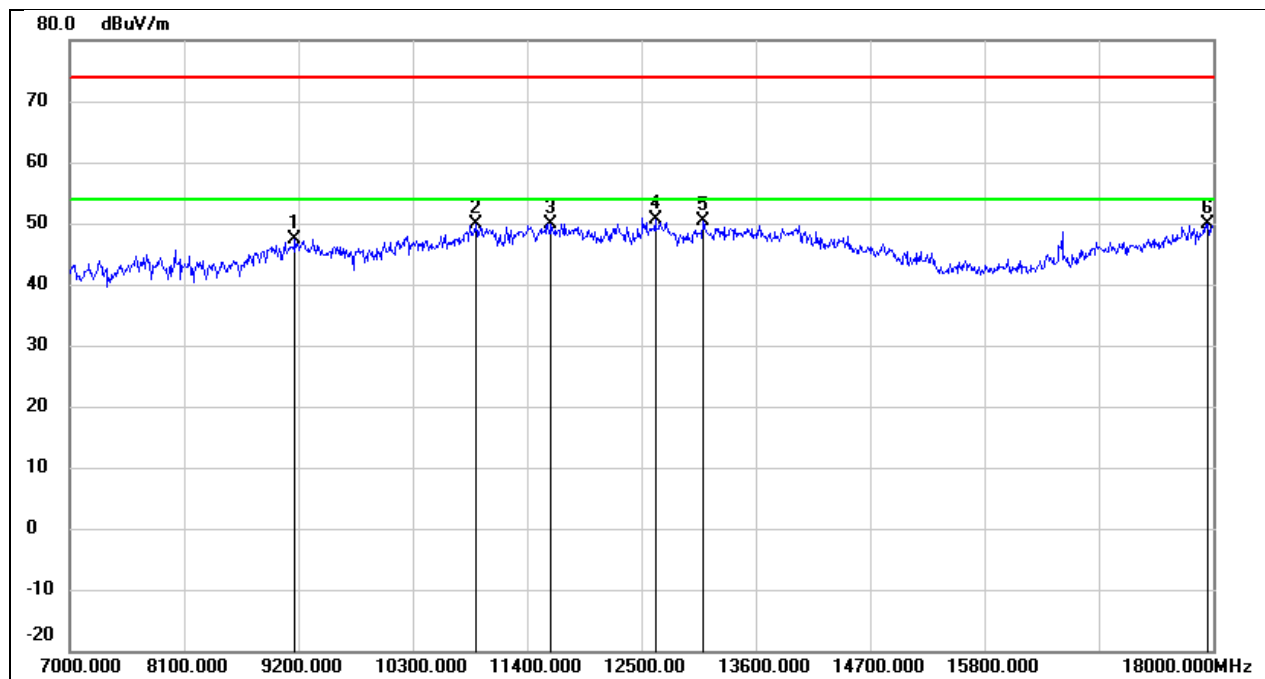


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	36.98	10.45	47.43	74.00	-26.57	peak
2	10905.000	35.48	14.36	49.84	74.00	-24.16	peak
3	11631.000	32.89	17.01	49.90	74.00	-24.10	peak
4	12632.000	32.73	17.99	50.72	74.00	-23.28	peak
5	13094.000	31.41	18.87	50.28	74.00	-23.72	peak
6	17945.000	24.05	25.75	49.80	74.00	-24.20	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

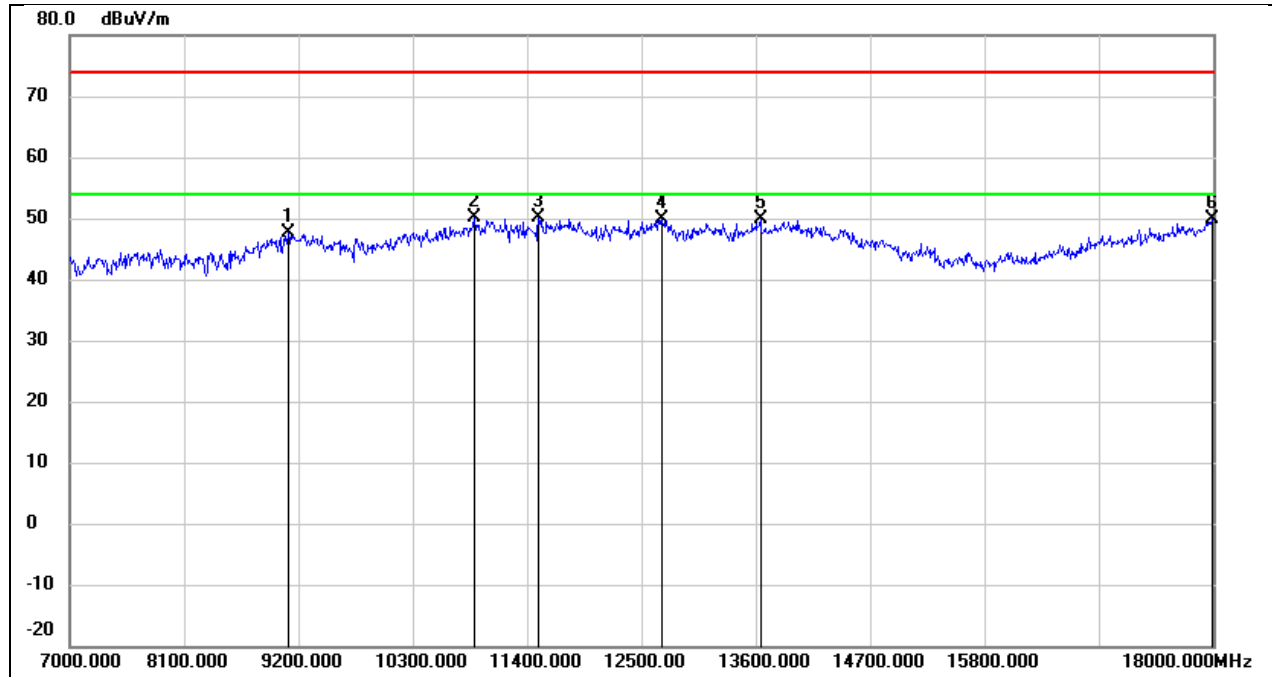


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	37.11	10.40	47.51	74.00	-26.49	peak
2	10894.000	35.84	14.32	50.16	74.00	-23.84	peak
3	11510.000	33.25	16.79	50.04	74.00	-23.96	peak
4	12698.000	31.76	18.08	49.84	74.00	-24.16	peak
5	13644.000	28.91	20.99	49.90	74.00	-24.10	peak
6	17989.000	23.93	26.04	49.97	74.00	-24.03	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3 V

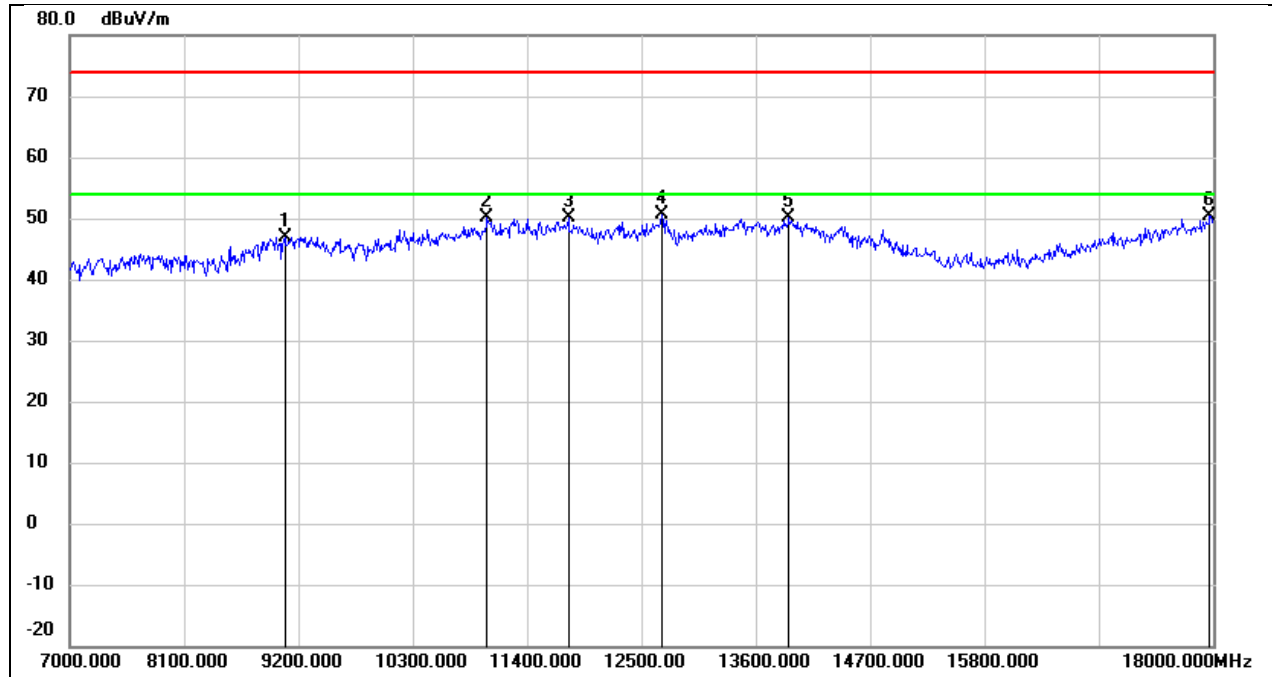


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	36.58	10.39	46.97	74.00	-27.03	peak
2	11015.000	35.39	14.79	50.18	74.00	-23.82	peak
3	11796.000	32.93	17.32	50.25	74.00	-23.75	peak
4	12698.000	32.58	18.08	50.66	74.00	-23.34	peak
5	13919.000	28.50	21.68	50.18	74.00	-23.82	peak
6	17967.000	24.59	25.89	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

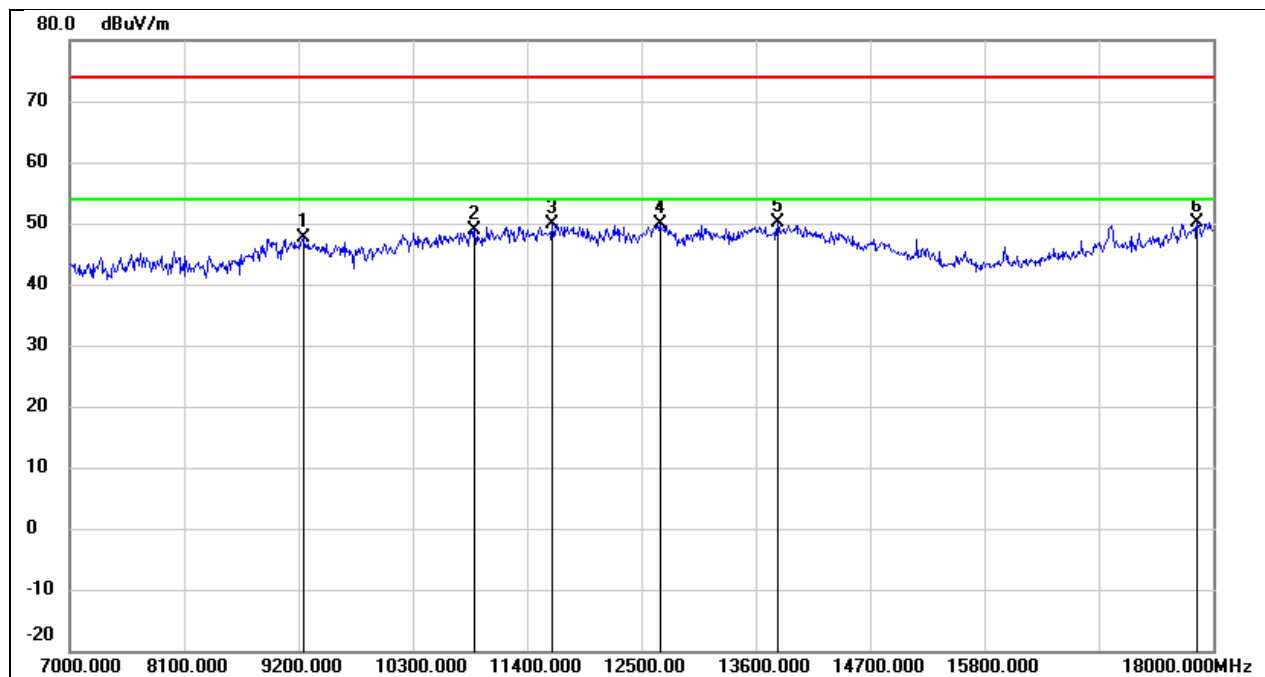


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.01	10.51	47.52	74.00	-26.48	peak
2	10894.000	34.68	14.32	49.00	74.00	-25.00	peak
3	11642.000	32.85	17.03	49.88	74.00	-24.12	peak
4	12676.000	31.92	18.05	49.97	74.00	-24.03	peak
5	13809.000	28.65	21.41	50.06	74.00	-23.94	peak
6	17846.000	25.04	25.08	50.12	74.00	-23.88	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3 V

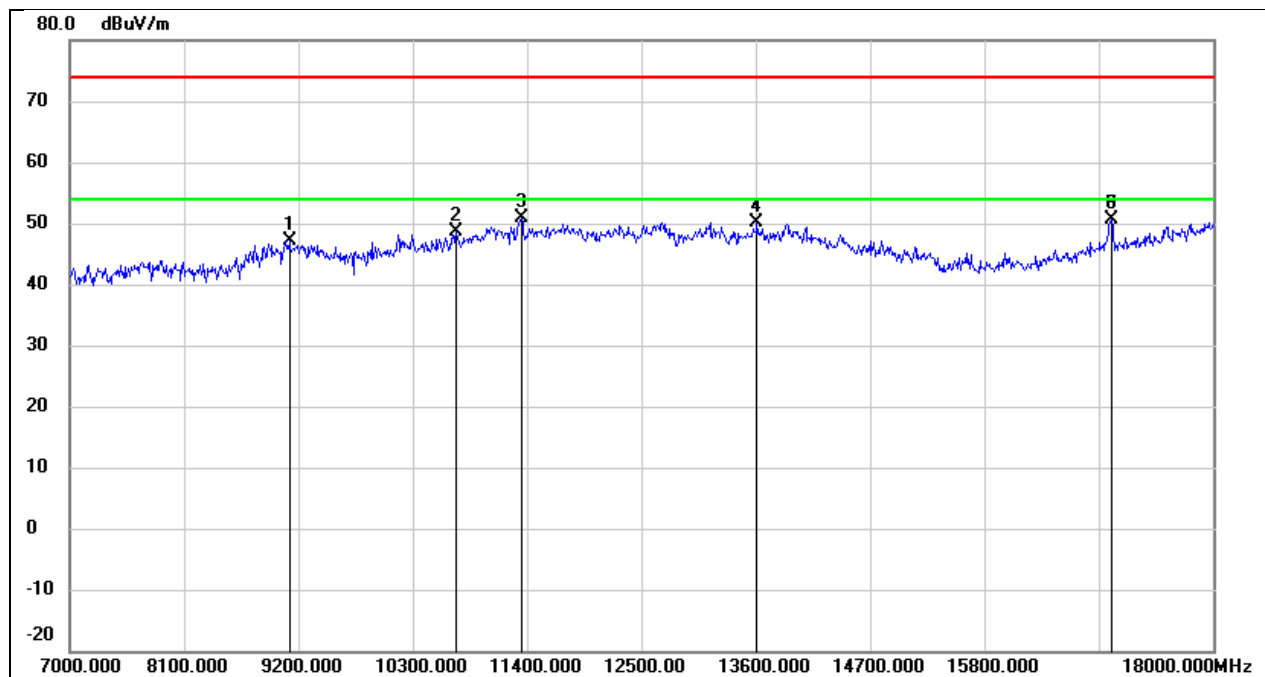


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	36.75	10.41	47.16	74.00	-26.84	peak
2	10718.000	34.91	13.66	48.57	74.00	-25.43	peak
3	11345.000	34.63	16.14	50.77	74.00	-23.23	peak
4	13611.000	29.30	20.92	50.22	74.00	-23.78	peak
5	17021.000	29.99	20.70	50.69	74.00	-23.31	peak
6	17021.000	29.99	20.70	50.69	74.00	-23.31	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

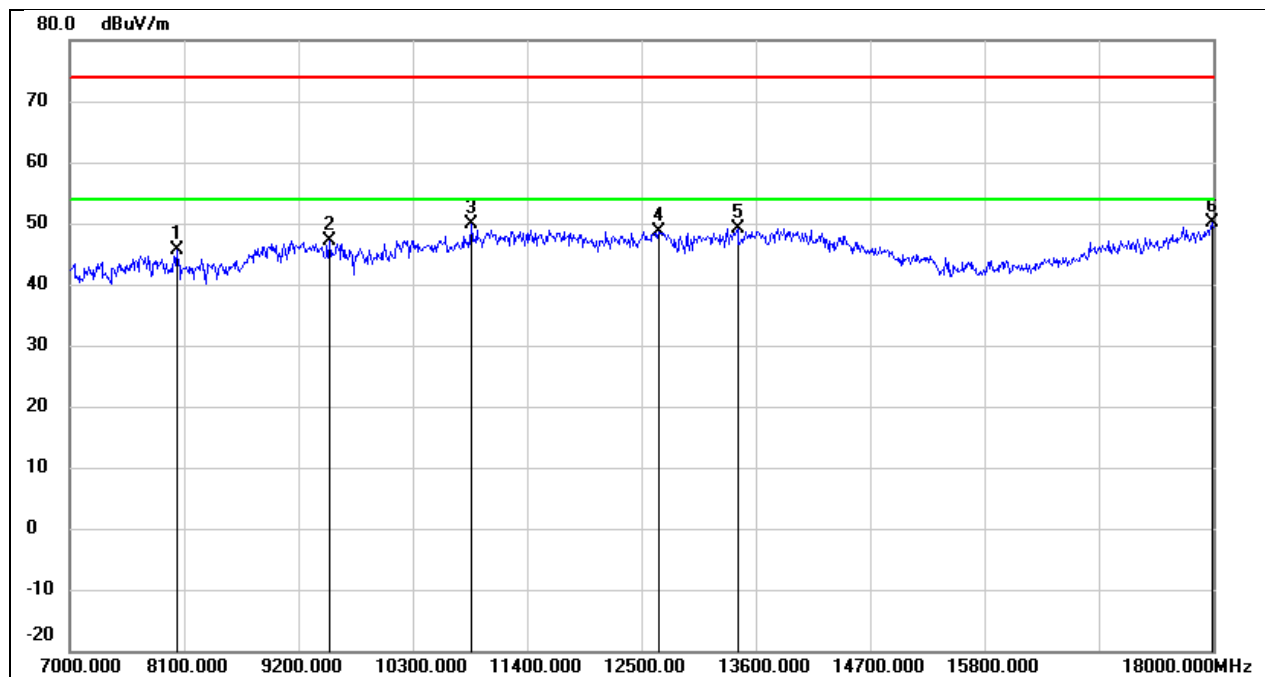


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8034.000	39.16	6.47	45.63	74.00	-28.37	peak
2	9497.000	36.46	10.66	47.12	74.00	-26.88	peak
3	10861.000	35.60	14.20	49.80	74.00	-24.20	peak
4	12665.000	30.64	18.04	48.68	74.00	-25.32	peak
5	13424.000	28.75	20.30	49.05	74.00	-24.95	peak
6	17989.000	23.97	26.04	50.01	74.00	-23.99	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3 V

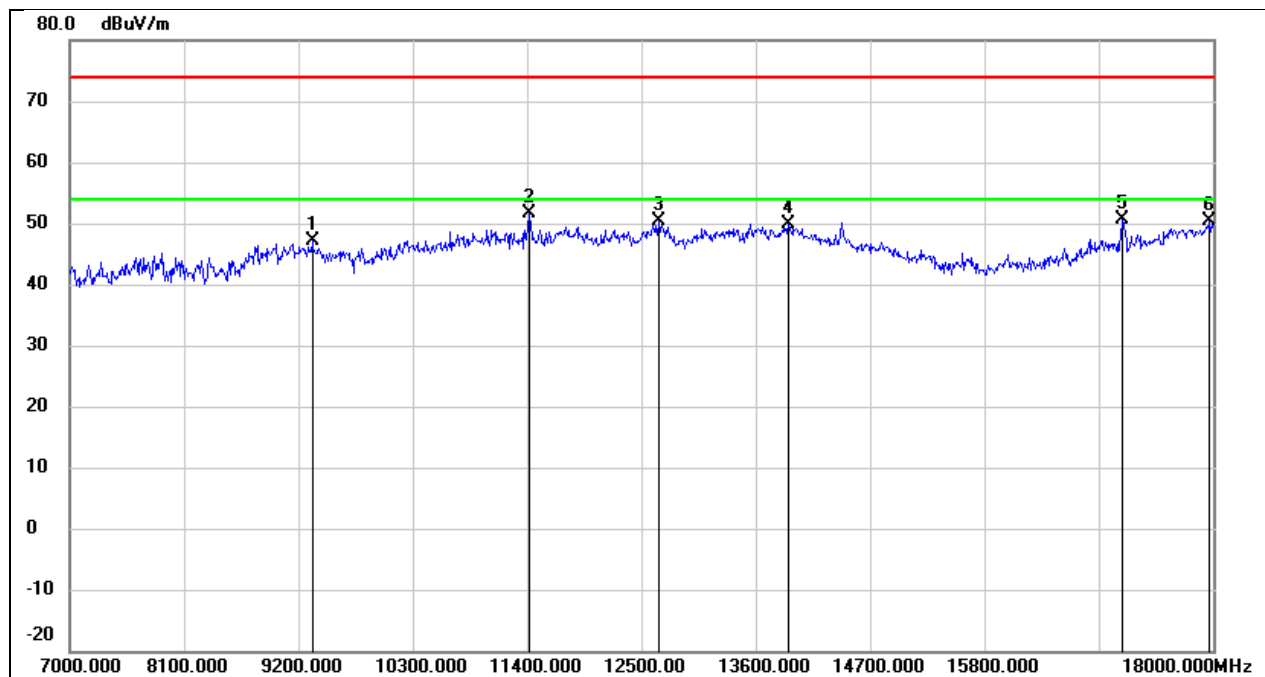


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.56	10.54	47.10	74.00	-26.90	peak
2	11422.000	35.27	16.46	51.73	74.00	-22.27	peak
3	12665.000	32.45	18.04	50.49	74.00	-23.51	peak
4	13908.000	28.22	21.66	49.88	74.00	-24.12	peak
5	17131.000	29.56	21.16	50.72	74.00	-23.28	peak
6	17967.000	24.46	25.89	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

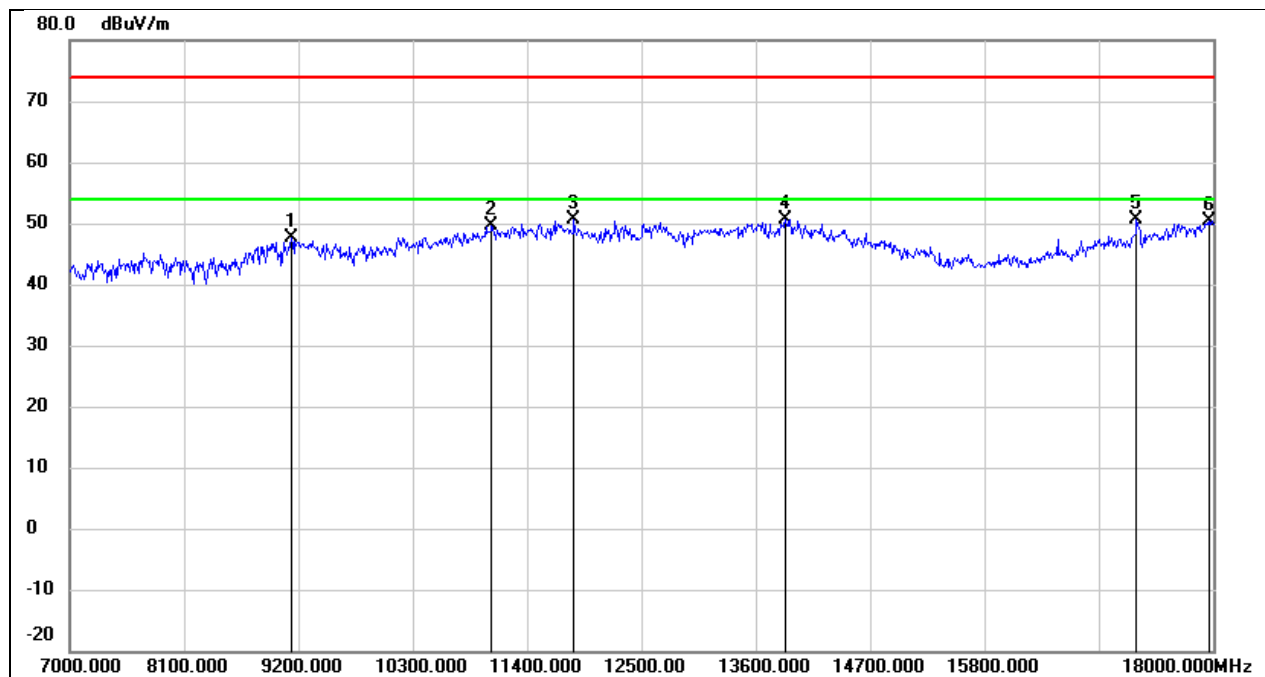


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.24	10.41	47.65	74.00	-26.35	peak
2	11059.000	34.65	14.96	49.61	74.00	-24.39	peak
3	11851.000	33.21	17.43	50.64	74.00	-23.36	peak
4	13886.000	29.03	21.60	50.63	74.00	-23.37	peak
5	17263.000	28.92	21.71	50.63	74.00	-23.37	peak
6	17956.000	24.58	25.82	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3 V

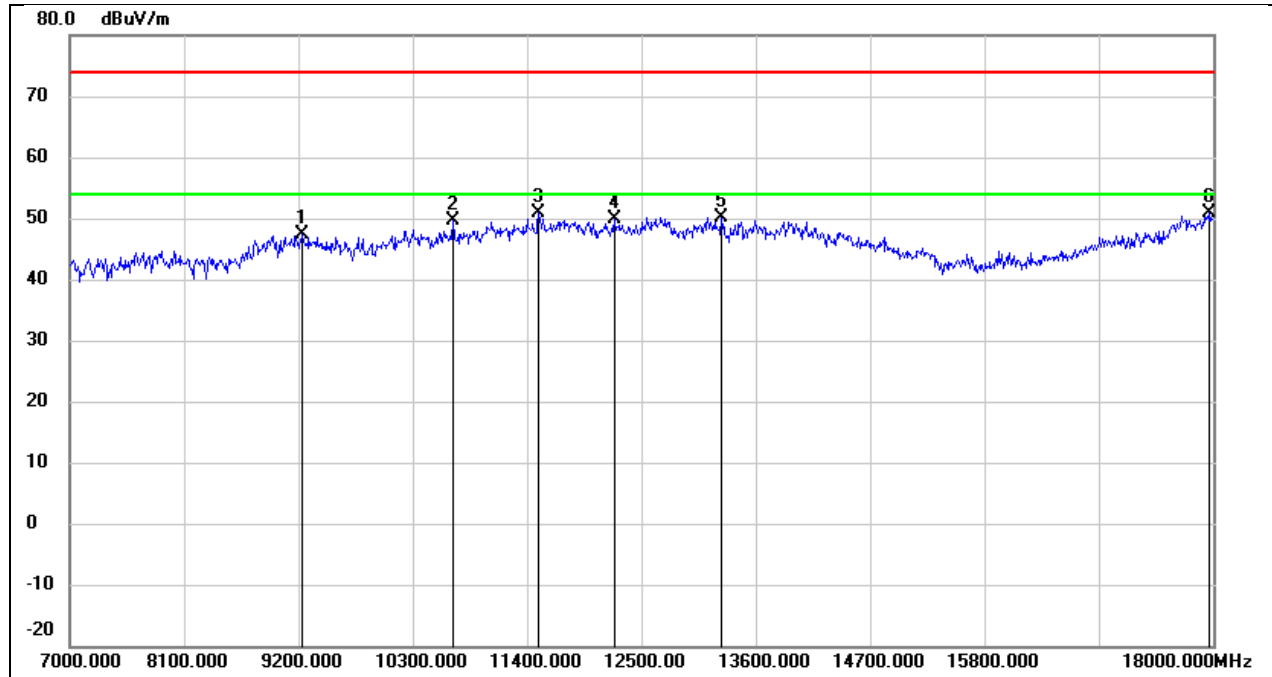


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.80	10.48	47.28	74.00	-26.72	peak
2	10685.000	36.02	13.53	49.55	74.00	-24.45	peak
3	11510.000	33.98	16.79	50.77	74.00	-23.23	peak
4	12236.000	32.07	17.76	49.83	74.00	-24.17	peak
5	13270.000	30.46	19.63	50.09	74.00	-23.91	peak
6	17967.000	24.87	25.89	50.76	74.00	-23.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

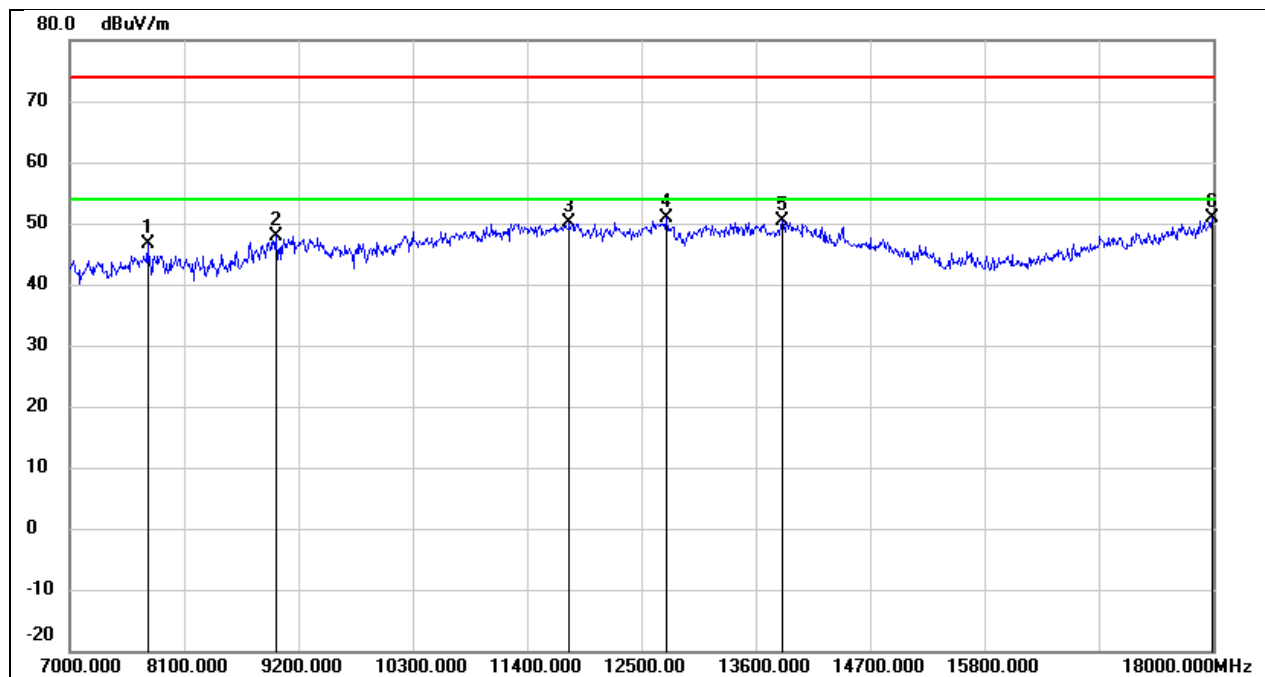


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.90	6.66	46.56	74.00	-27.44	peak
2	8980.000	37.73	10.21	47.94	74.00	-26.06	peak
3	11807.000	32.80	17.34	50.14	74.00	-23.86	peak
4	12742.000	32.63	18.13	50.76	74.00	-23.24	peak
5	13853.000	28.76	21.52	50.28	74.00	-23.72	peak
6	17989.000	24.82	26.04	50.86	74.00	-23.14	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3 V

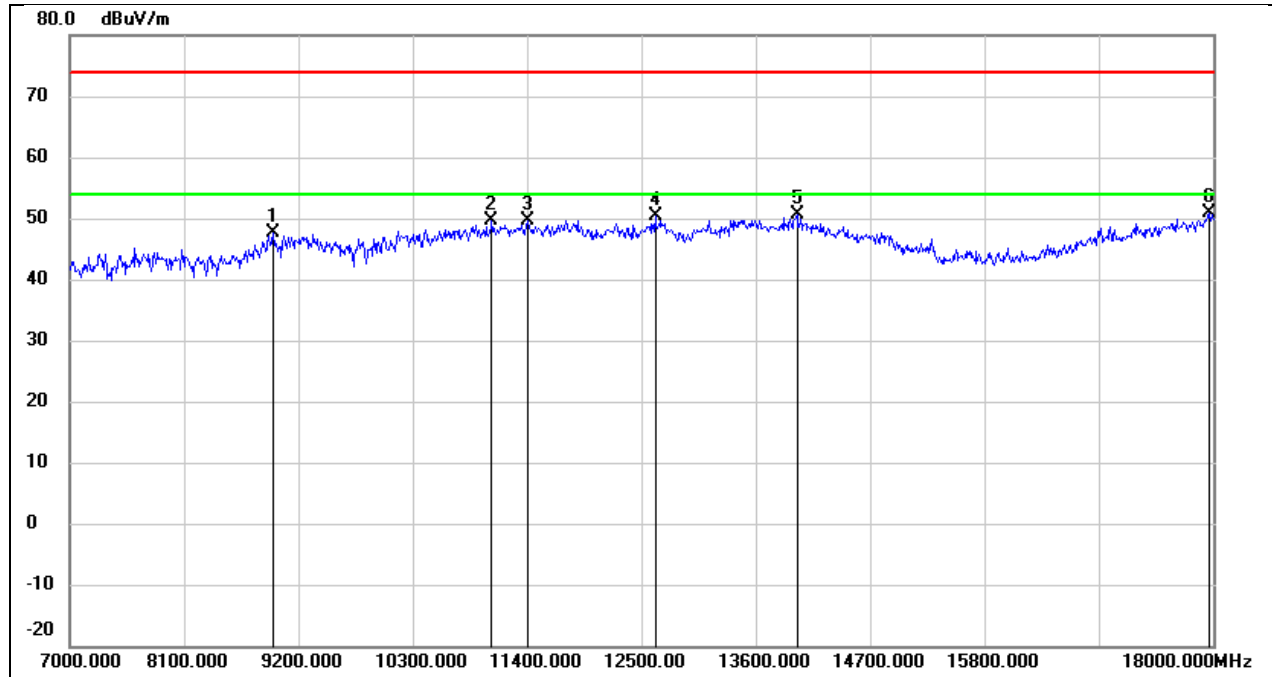


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.48	10.05	47.53	74.00	-26.47	peak
2	11059.000	34.60	14.96	49.56	74.00	-24.44	peak
3	11411.000	33.28	16.41	49.69	74.00	-24.31	peak
4	12632.000	32.35	17.99	50.34	74.00	-23.66	peak
5	13996.000	28.72	21.87	50.59	74.00	-23.41	peak
6	17956.000	25.03	25.82	50.85	74.00	-23.15	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

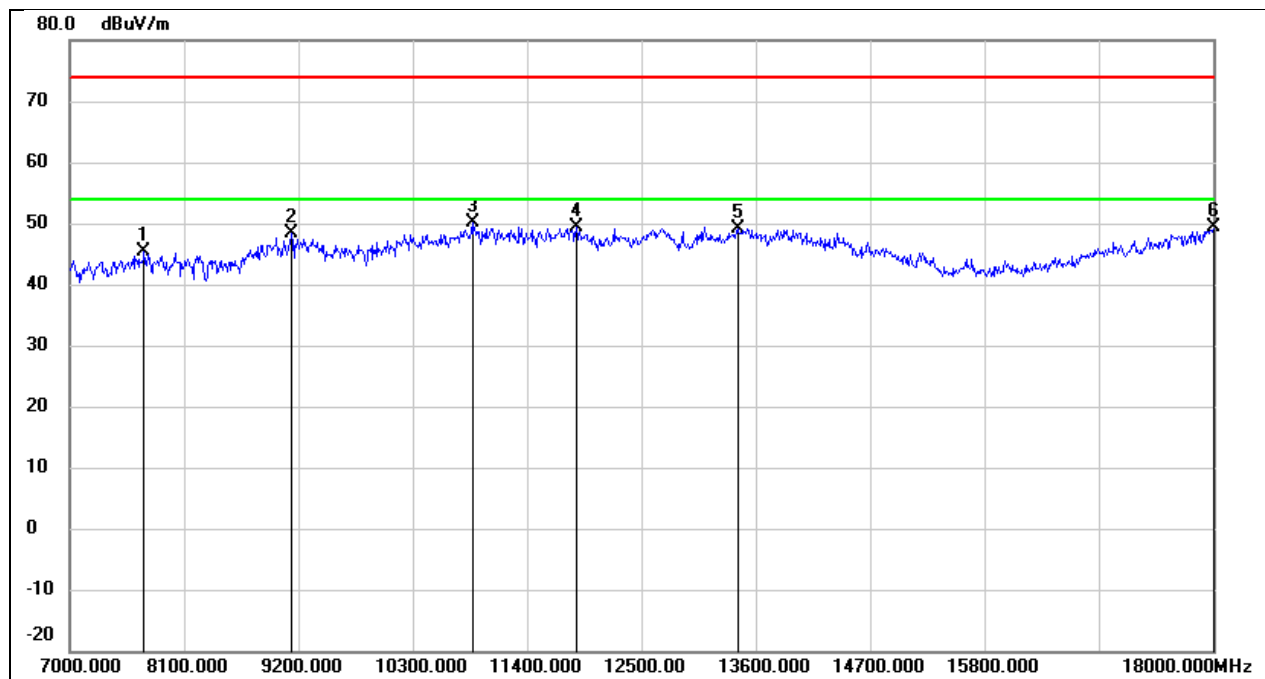


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	38.68	6.68	45.36	74.00	-28.64	peak
2	9134.000	37.97	10.41	48.38	74.00	-25.62	peak
3	10872.000	35.93	14.23	50.16	74.00	-23.84	peak
4	11873.000	31.84	17.46	49.30	74.00	-24.70	peak
5	13424.000	28.88	20.30	49.18	74.00	-24.82	peak
6	18000.000	23.31	26.12	49.43	74.00	-24.57	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3 V

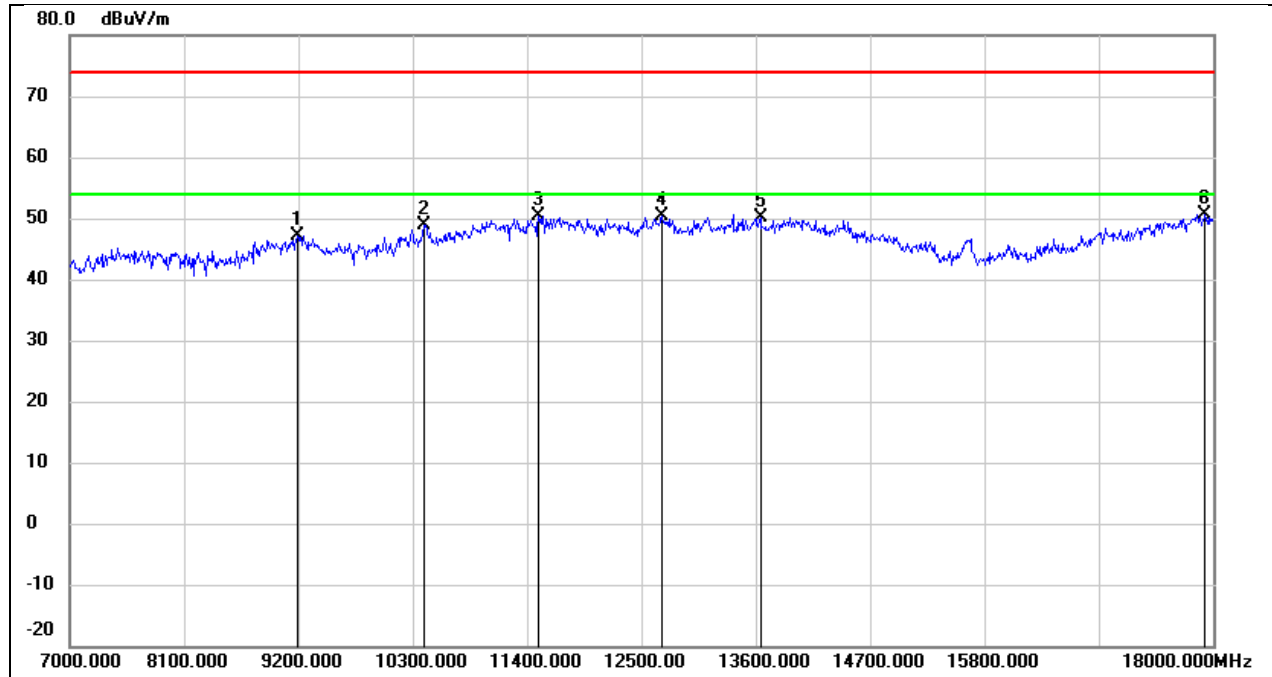


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.58	10.46	47.04	74.00	-26.96	peak
2	10410.000	36.34	12.62	48.96	74.00	-25.04	peak
3	11510.000	33.60	16.79	50.39	74.00	-23.61	peak
4	12698.000	32.31	18.08	50.39	74.00	-23.61	peak
5	13644.000	29.04	20.99	50.03	74.00	-23.97	peak
6	17923.000	25.06	25.60	50.66	74.00	-23.34	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

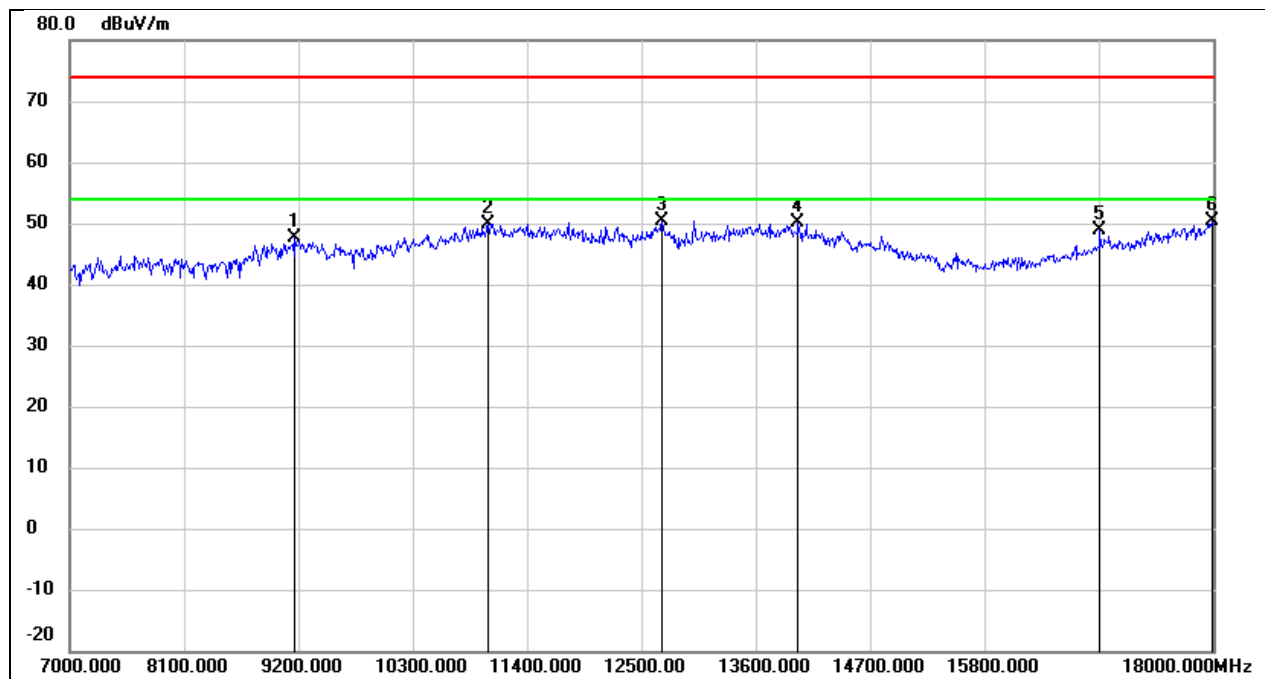


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.10	10.45	47.55	74.00	-26.45	peak
2	11026.000	35.09	14.82	49.91	74.00	-24.09	peak
3	12698.000	32.34	18.08	50.42	74.00	-23.58	peak
4	14007.000	28.37	21.85	50.22	74.00	-23.78	peak
5	16911.000	28.60	20.21	48.81	74.00	-25.19	peak
6	17989.000	24.36	26.04	50.40	74.00	-23.60	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3 V

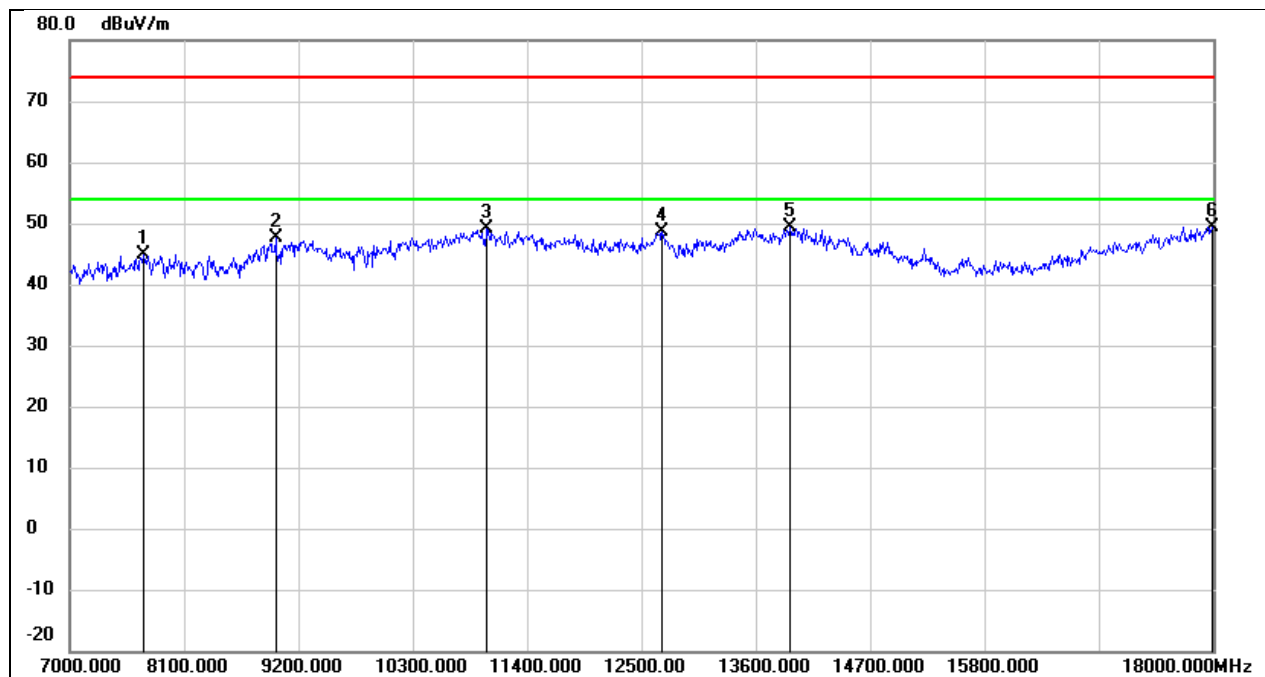


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7704.000	38.29	6.69	44.98	74.00	-29.02	peak
2	8980.000	37.45	10.21	47.66	74.00	-26.34	peak
3	11015.000	34.38	14.79	49.17	74.00	-24.83	peak
4	12698.000	30.54	18.08	48.62	74.00	-25.38	peak
5	13930.000	27.77	21.71	49.48	74.00	-24.52	peak
6	17989.000	23.43	26.04	49.47	74.00	-24.53	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

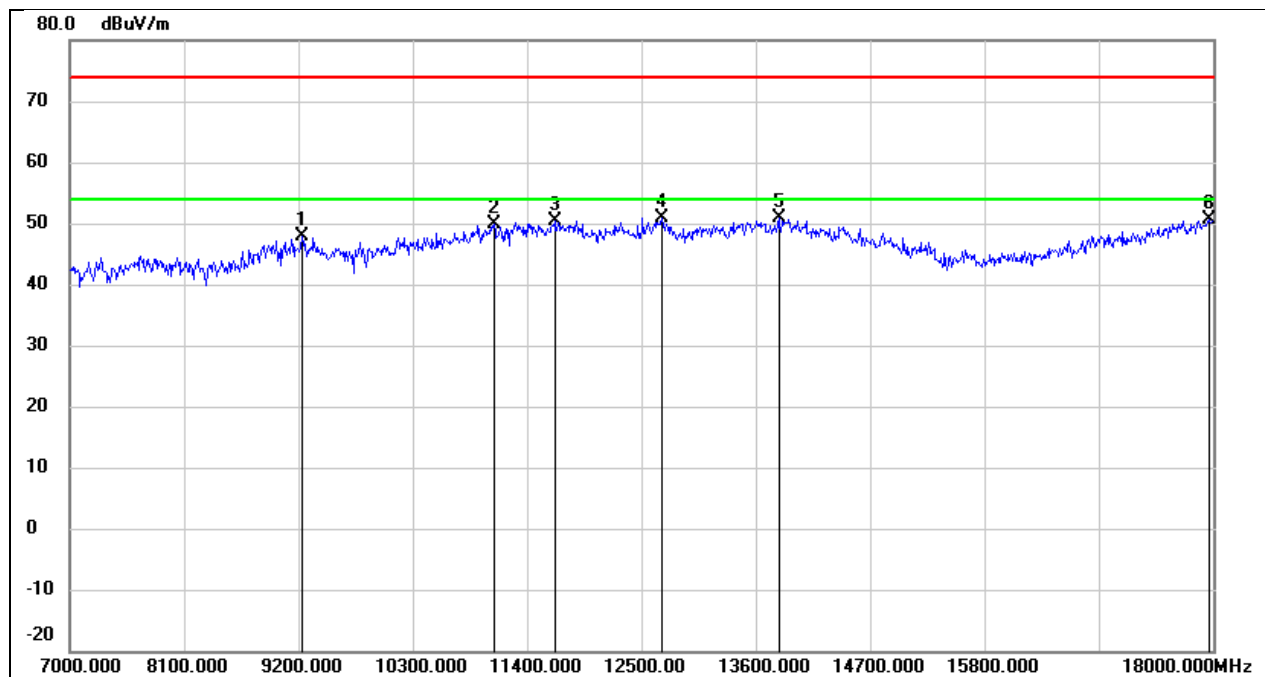


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.30	10.48	47.78	74.00	-26.22	peak
2	11081.000	34.83	15.05	49.88	74.00	-24.12	peak
3	11664.000	33.41	17.08	50.49	74.00	-23.51	peak
4	12698.000	32.85	18.08	50.93	74.00	-23.07	peak
5	13820.000	29.41	21.43	50.84	74.00	-23.16	peak
6	17956.000	24.88	25.82	50.70	74.00	-23.30	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3 V

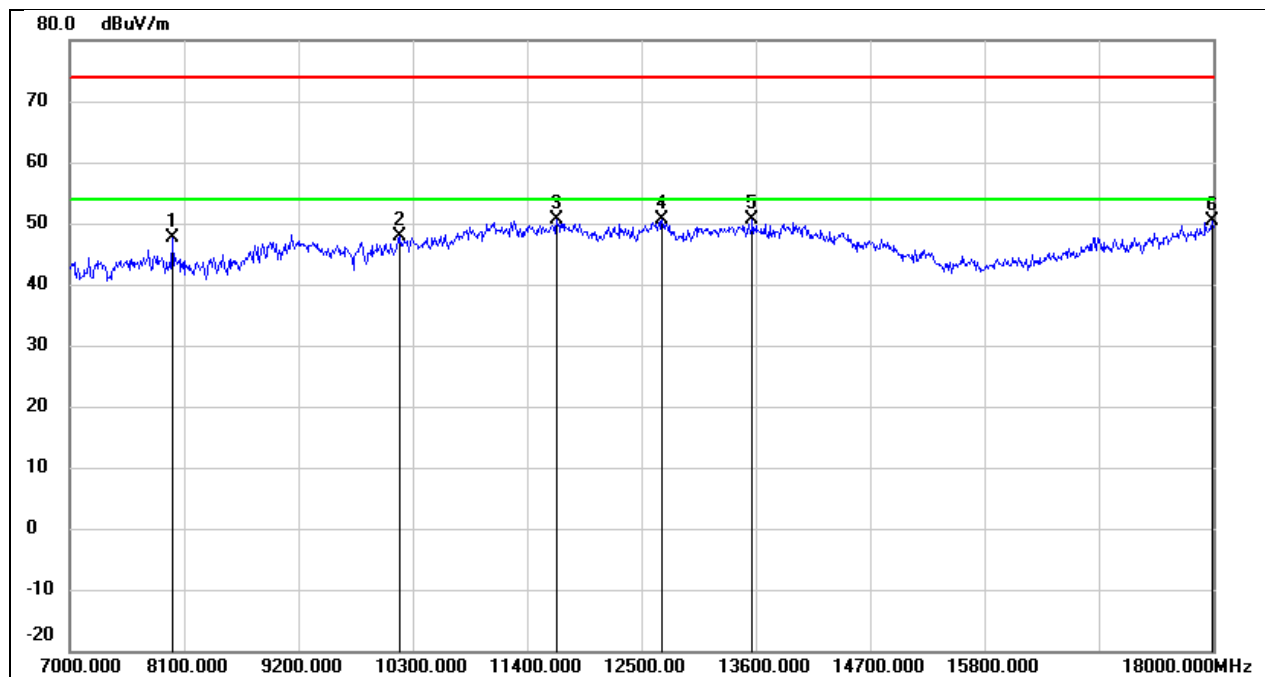


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7990.000	41.27	6.43	47.70	74.00	-26.30	peak
2	10179.000	35.82	12.14	47.96	74.00	-26.04	peak
3	11686.000	33.44	17.12	50.56	74.00	-23.44	peak
4	12698.000	32.43	18.08	50.51	74.00	-23.49	peak
5	13567.000	29.71	20.80	50.51	74.00	-23.49	peak
6	17989.000	24.41	26.04	50.45	74.00	-23.55	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

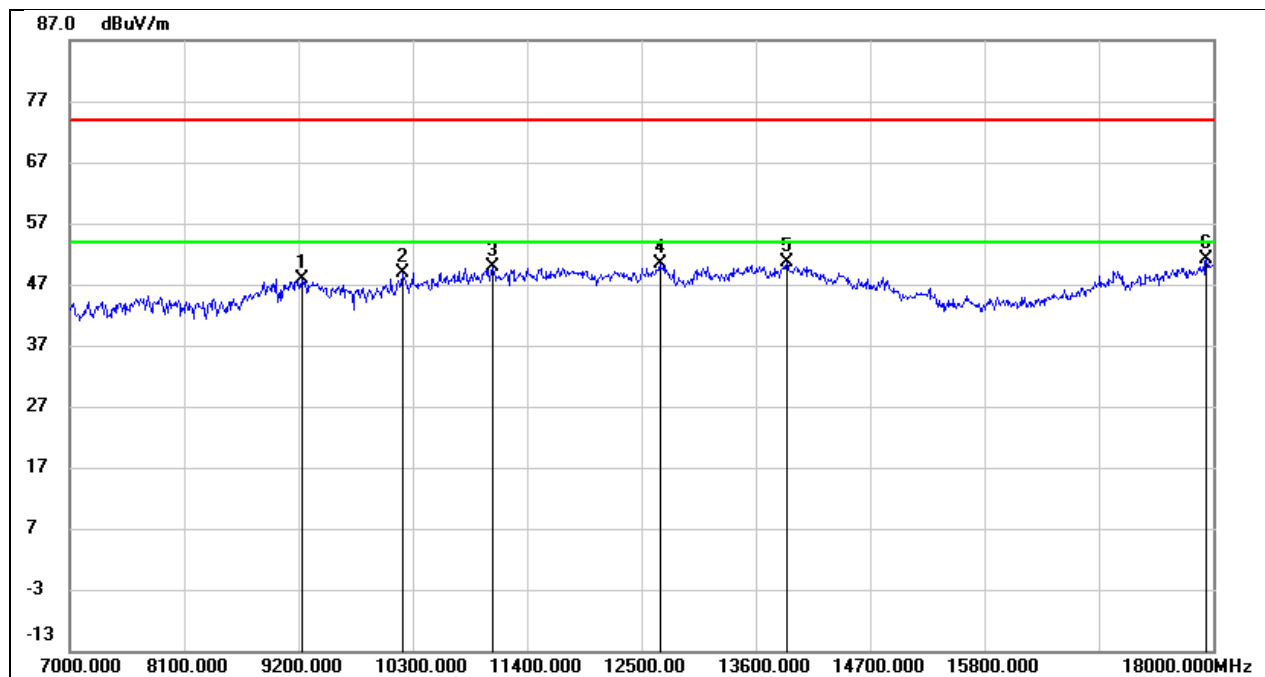


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.51	10.48	47.99	74.00	-26.01	peak
2	10201.000	36.70	12.19	48.89	74.00	-25.11	peak
3	11070.000	34.82	15.01	49.83	74.00	-24.17	peak
4	12676.000	32.30	18.05	50.35	74.00	-23.65	peak
5	13897.000	28.95	21.62	50.57	74.00	-23.43	peak
6	17934.000	25.35	25.67	51.02	74.00	-22.98	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3 V

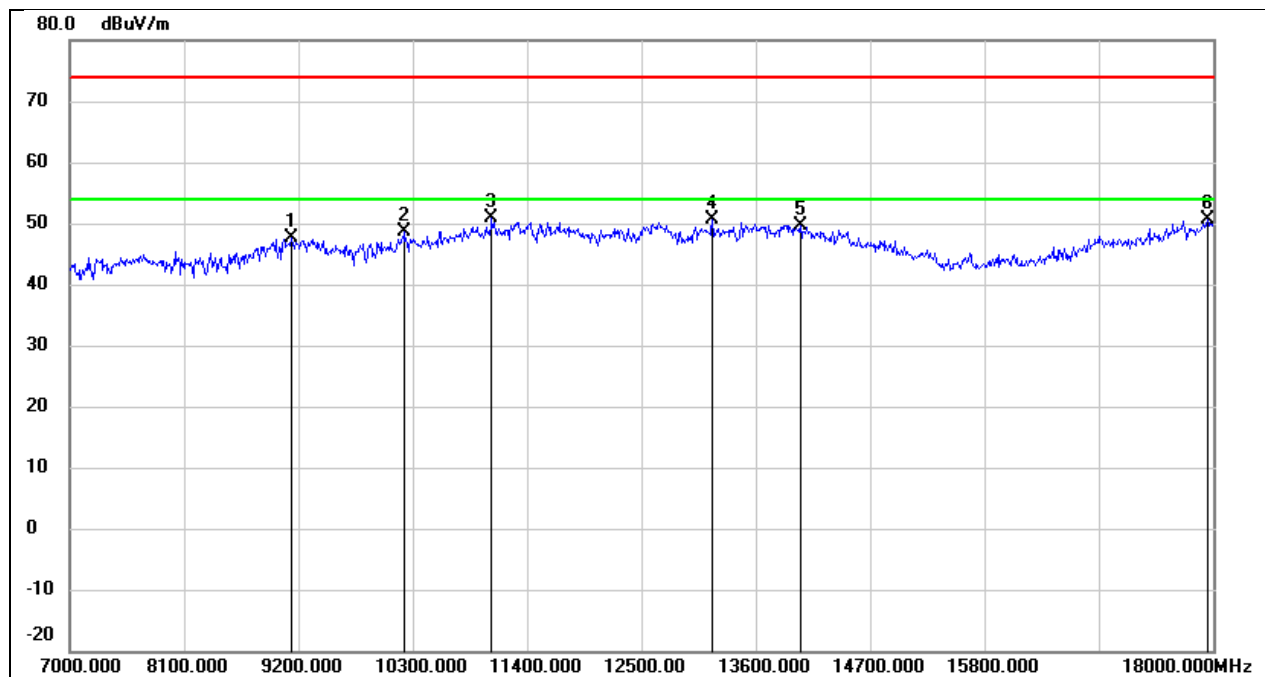


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.11	10.41	47.52	74.00	-26.48	peak
2	10223.000	36.28	12.24	48.52	74.00	-25.48	peak
3	11059.000	35.91	14.96	50.87	74.00	-23.13	peak
4	13182.000	31.29	19.24	50.53	74.00	-23.47	peak
5	14029.000	27.97	21.76	49.73	74.00	-24.27	peak
6	17945.000	24.88	25.75	50.63	74.00	-23.37	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

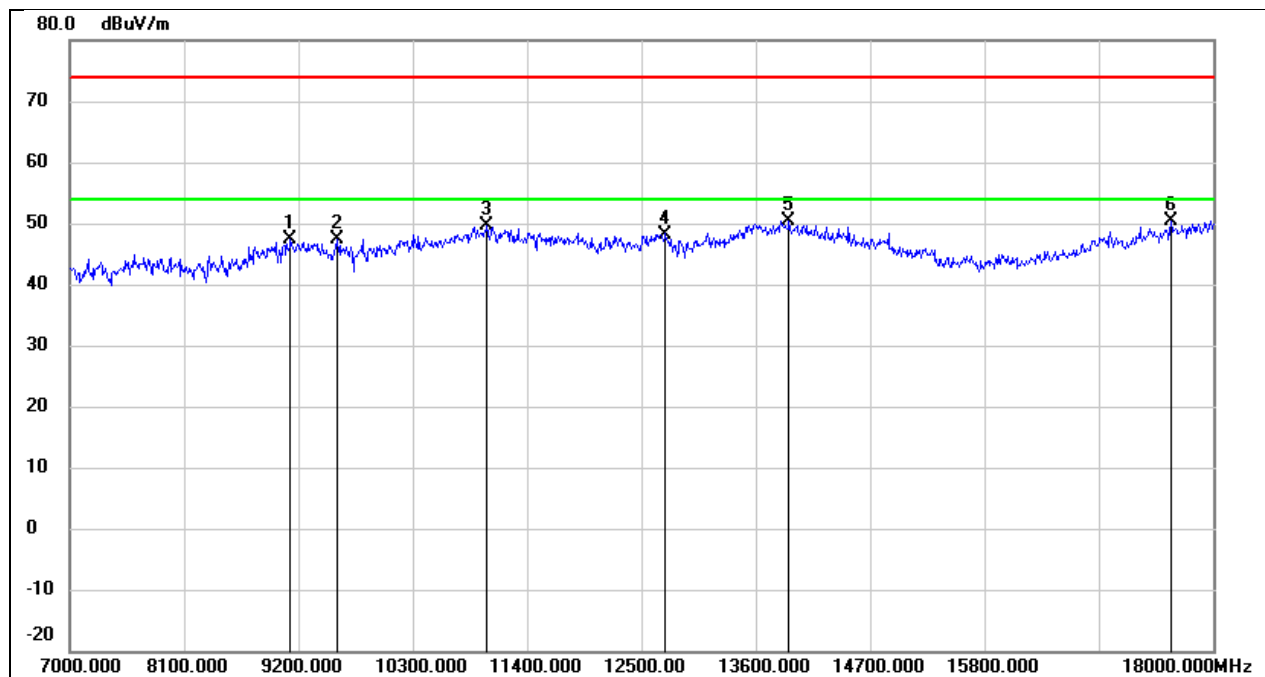


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.98	10.42	47.40	74.00	-26.60	peak
2	9574.000	36.68	10.81	47.49	74.00	-26.51	peak
3	11015.000	34.76	14.79	49.55	74.00	-24.45	peak
4	12731.000	30.13	18.12	48.25	74.00	-25.75	peak
5	13919.000	28.81	21.68	50.49	74.00	-23.51	peak
6	17593.000	26.97	23.34	50.31	74.00	-23.69	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3 V

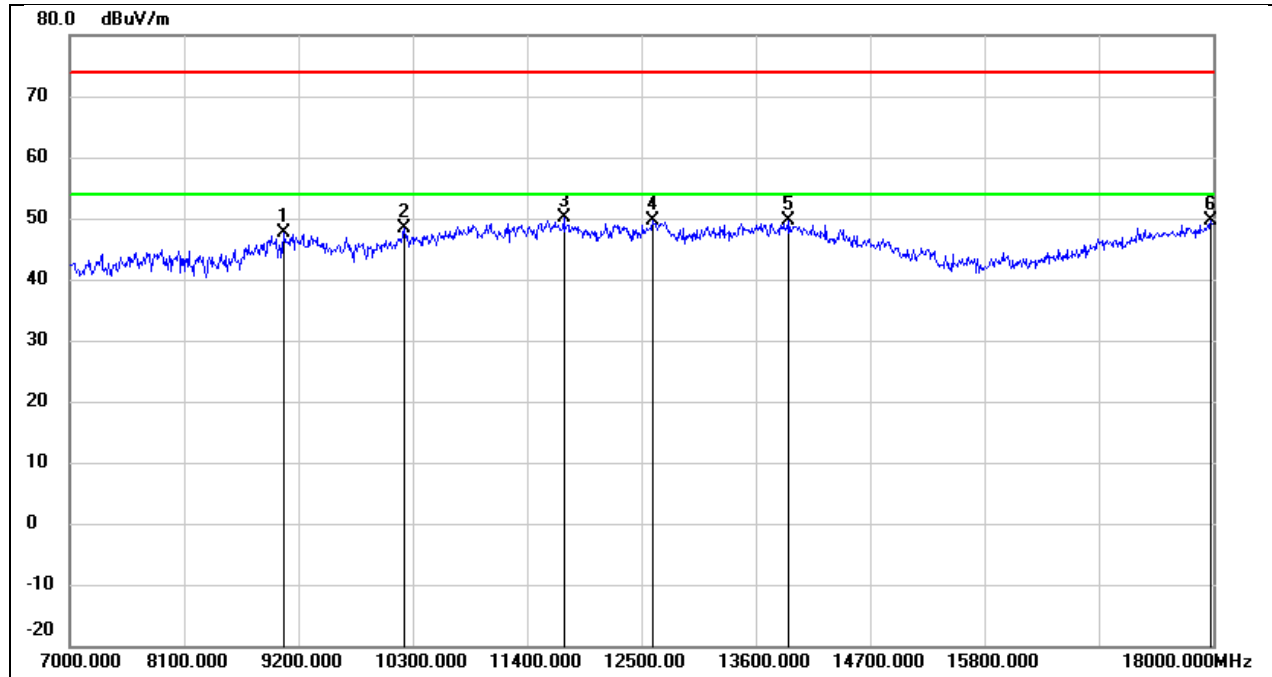


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.28	10.38	47.66	74.00	-26.34	peak
2	10212.000	36.15	12.21	48.36	74.00	-25.64	peak
3	11752.000	32.78	17.24	50.02	74.00	-23.98	peak
4	12610.000	31.69	17.97	49.66	74.00	-24.34	peak
5	13919.000	28.05	21.68	49.73	74.00	-24.27	peak
6	17978.000	23.72	25.97	49.69	74.00	-24.31	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

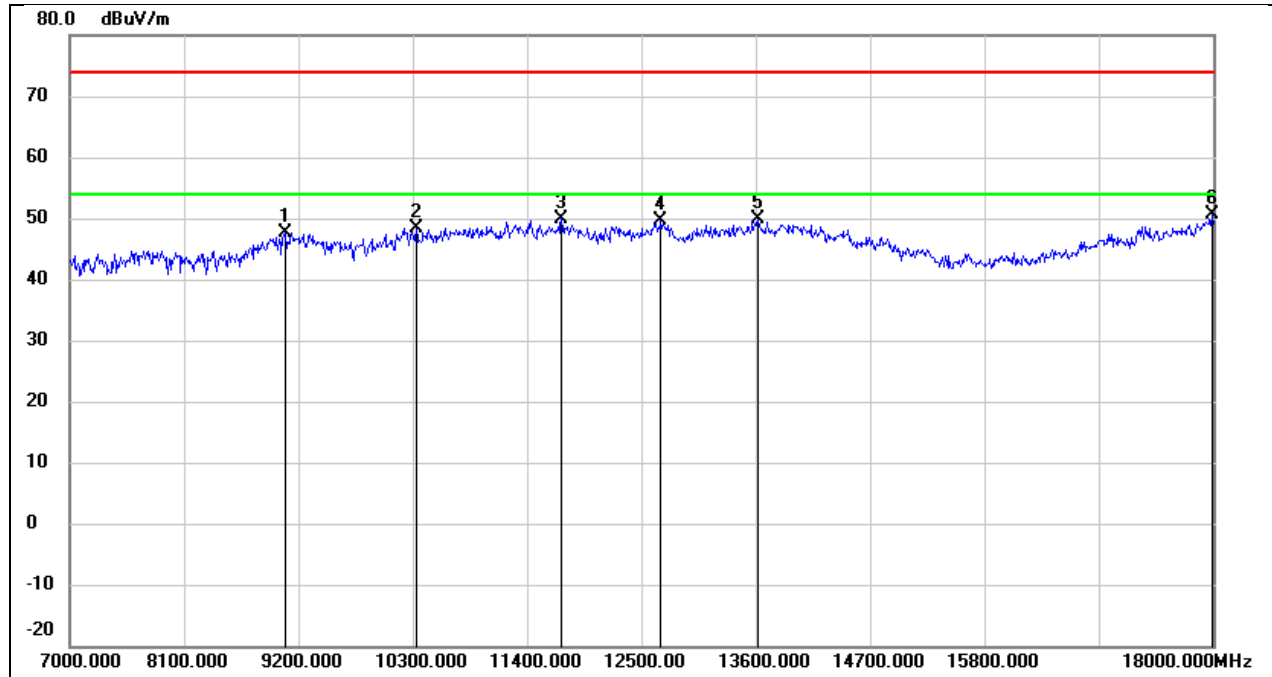


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	37.28	10.39	47.67	74.00	-26.33	peak
2	10333.000	35.91	12.47	48.38	74.00	-25.62	peak
3	11730.000	32.81	17.19	50.00	74.00	-24.00	peak
4	12687.000	31.59	18.05	49.64	74.00	-24.36	peak
5	13622.000	29.04	20.95	49.99	74.00	-24.01	peak
6	17989.000	24.59	26.04	50.63	74.00	-23.37	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3 V

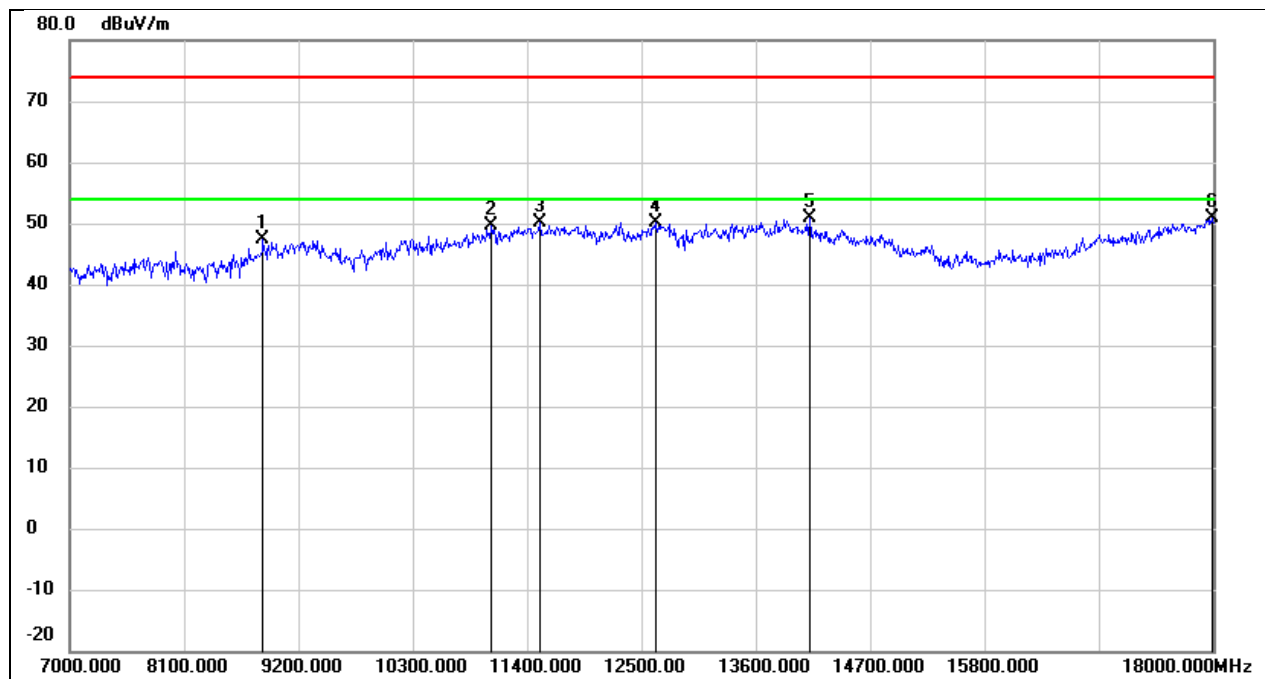


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8859.000	37.96	9.36	47.32	74.00	-26.68	peak
2	11059.000	34.77	14.96	49.73	74.00	-24.27	peak
3	11521.000	33.27	16.82	50.09	74.00	-23.91	peak
4	12643.000	32.15	18.01	50.16	74.00	-23.84	peak
5	14117.000	29.47	21.39	50.86	74.00	-23.14	peak
6	17989.000	24.83	26.04	50.87	74.00	-23.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

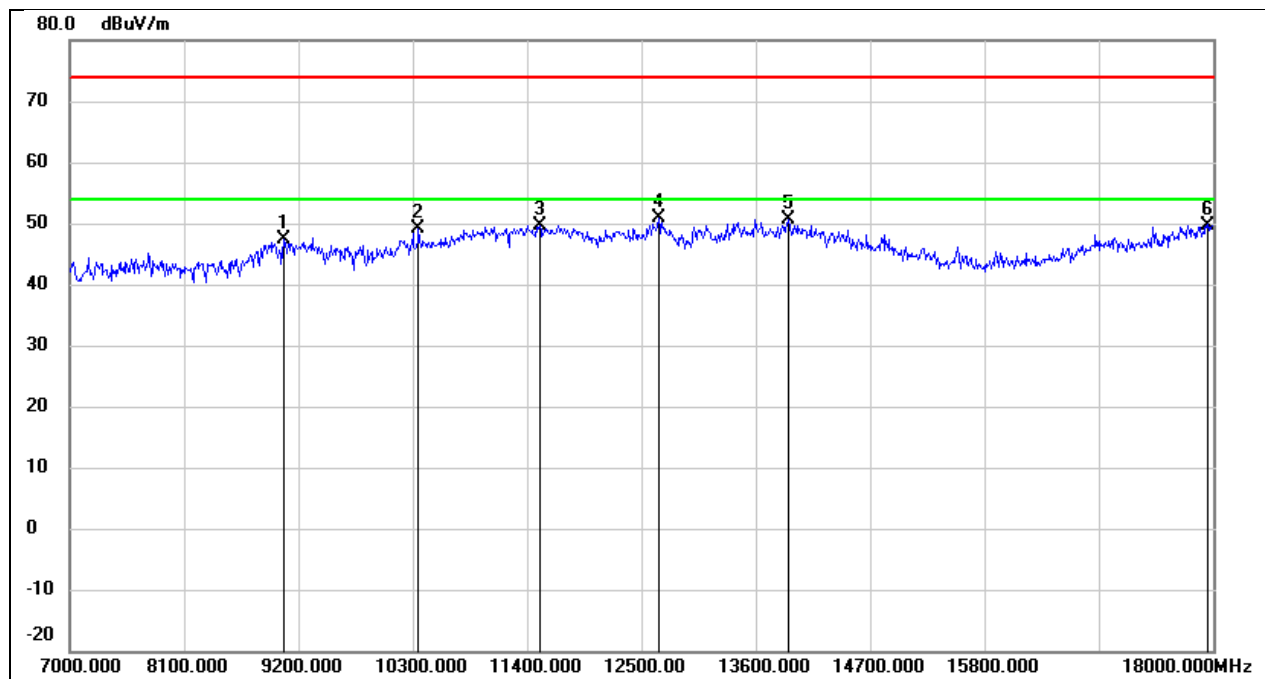


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.00	10.38	47.38	74.00	-26.62	peak
2	10355.000	36.59	12.52	49.11	74.00	-24.89	peak
3	11521.000	32.85	16.82	49.67	74.00	-24.33	peak
4	12665.000	32.86	18.04	50.90	74.00	-23.10	peak
5	13919.000	28.89	21.68	50.57	74.00	-23.43	peak
6	17945.000	24.00	25.75	49.75	74.00	-24.25	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

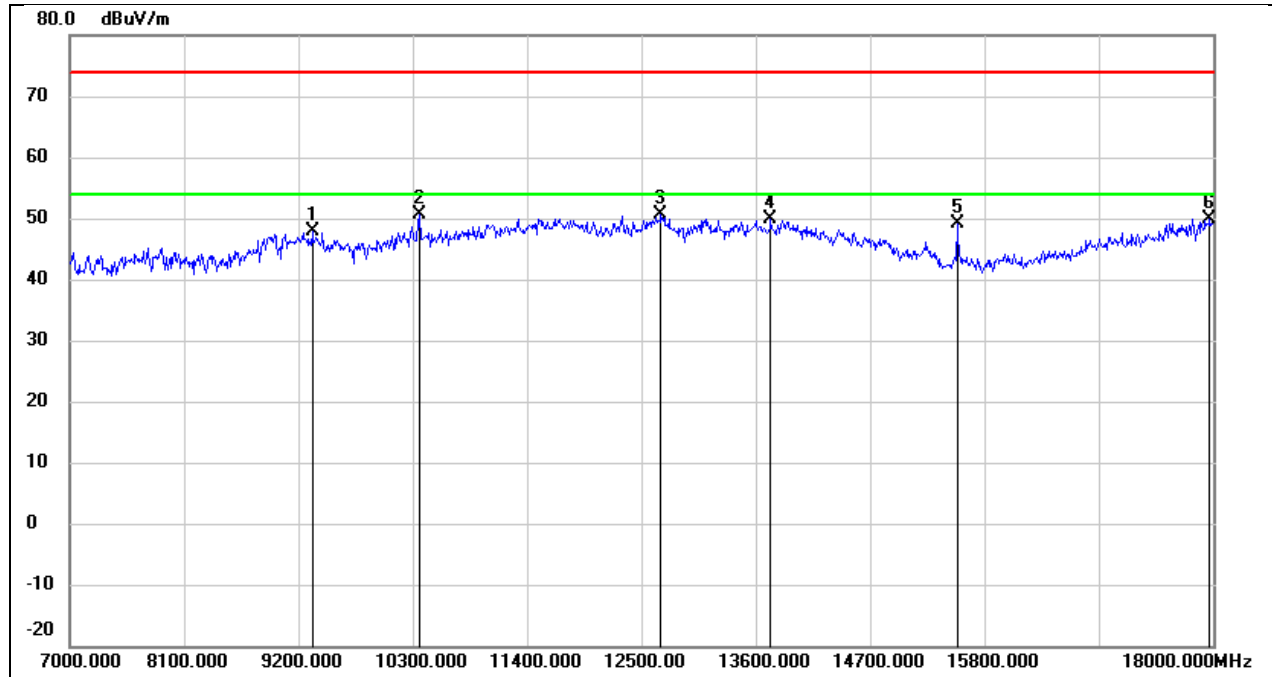


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.38	10.54	47.92	74.00	-26.08	peak
2	10366.000	38.13	12.54	50.67	74.00	-23.33	peak
3	12687.000	32.56	18.05	50.61	74.00	-23.39	peak
4	13743.000	28.52	21.24	49.76	74.00	-24.24	peak
5	15536.000	32.33	16.73	49.06	74.00	-24.94	peak
6	17967.000	23.97	25.89	49.86	74.00	-24.14	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

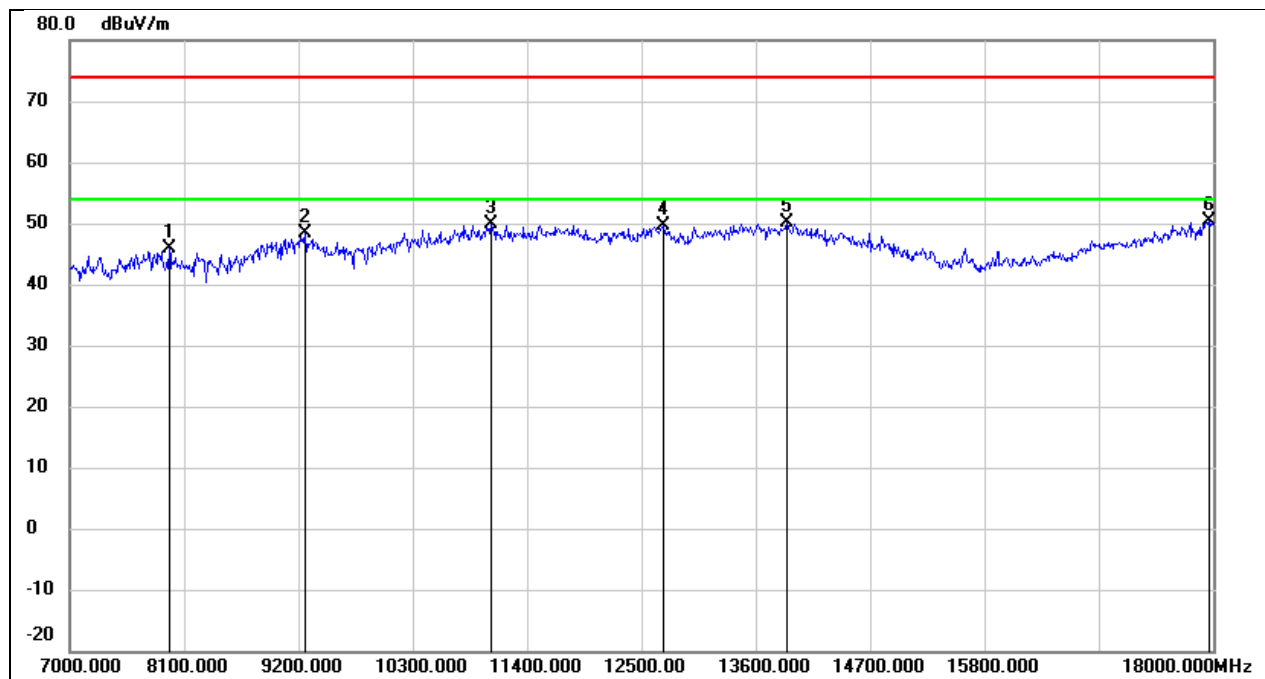


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7957.000	39.38	6.46	45.84	74.00	-28.16	peak
2	9266.000	37.87	10.51	48.38	74.00	-25.62	peak
3	11048.000	34.86	14.91	49.77	74.00	-24.23	peak
4	12709.000	31.45	18.09	49.54	74.00	-24.46	peak
5	13897.000	28.60	21.62	50.22	74.00	-23.78	peak
6	17967.000	24.51	25.89	50.40	74.00	-23.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3 V

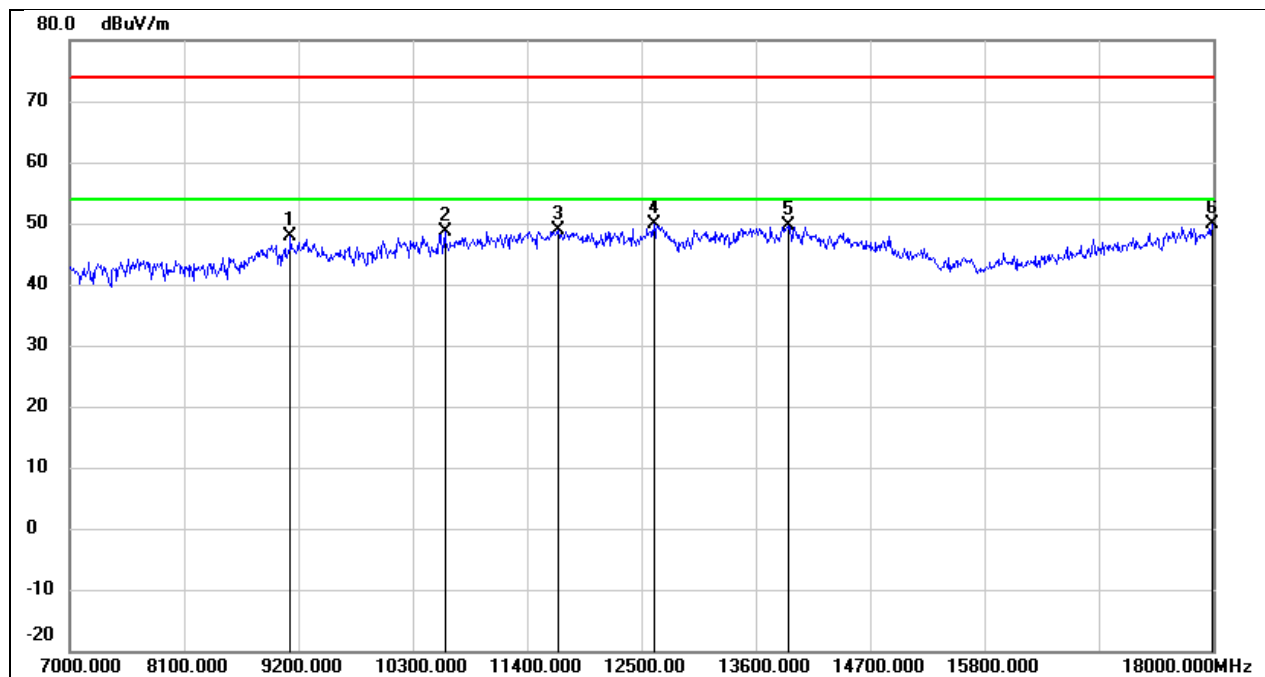


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	37.34	10.42	47.76	74.00	-26.24	peak
2	10608.000	35.40	13.23	48.63	74.00	-25.37	peak
3	11697.000	31.63	17.13	48.76	74.00	-25.24	peak
4	12621.000	31.89	17.98	49.87	74.00	-24.13	peak
5	13908.000	28.04	21.66	49.70	74.00	-24.30	peak
6	17989.000	23.76	26.04	49.80	74.00	-24.20	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

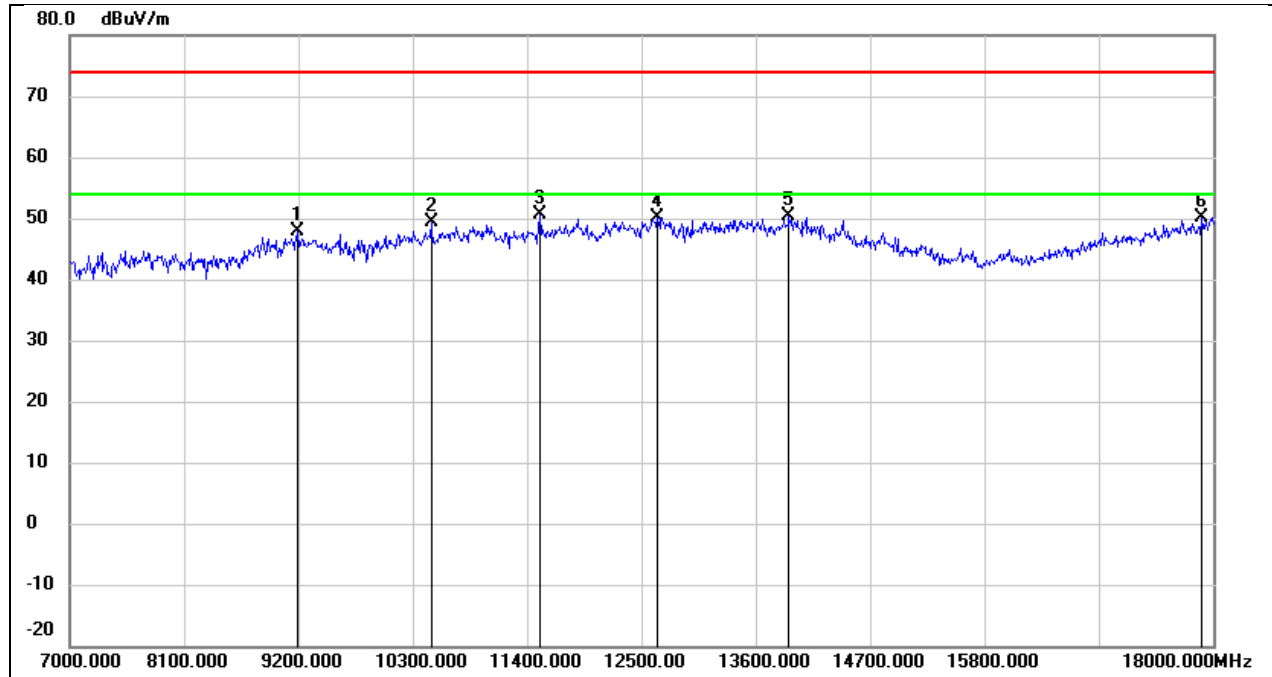


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.36	10.46	47.82	74.00	-26.18	peak
2	10476.000	36.60	12.77	49.37	74.00	-24.63	peak
3	11521.000	33.89	16.82	50.71	74.00	-23.29	peak
4	12654.000	32.04	18.01	50.05	74.00	-23.95	peak
5	13919.000	28.67	21.68	50.35	74.00	-23.65	peak
6	17890.000	24.79	25.37	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3 V

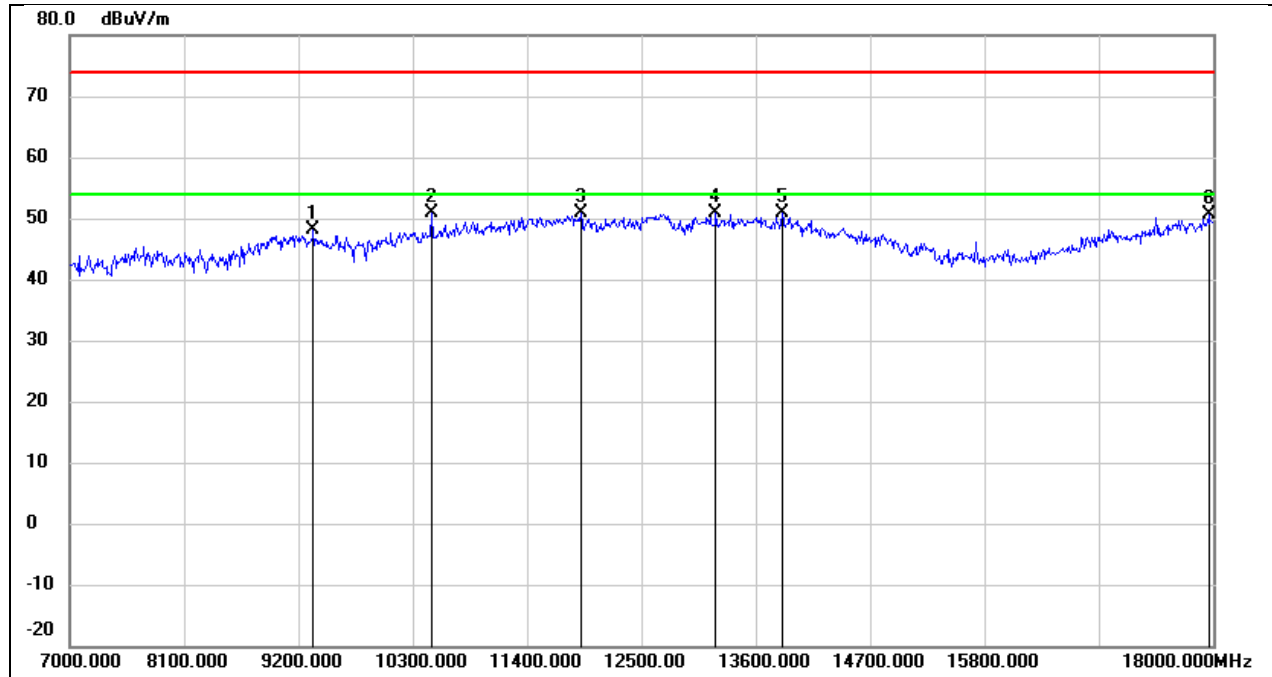


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.51	10.55	48.06	74.00	-25.94	peak
2	10487.000	38.12	12.79	50.91	74.00	-23.09	peak
3	11917.000	33.32	17.54	50.86	74.00	-23.14	peak
4	13215.000	31.48	19.39	50.87	74.00	-23.13	peak
5	13853.000	29.48	21.52	51.00	74.00	-23.00	peak
6	17956.000	24.83	25.82	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

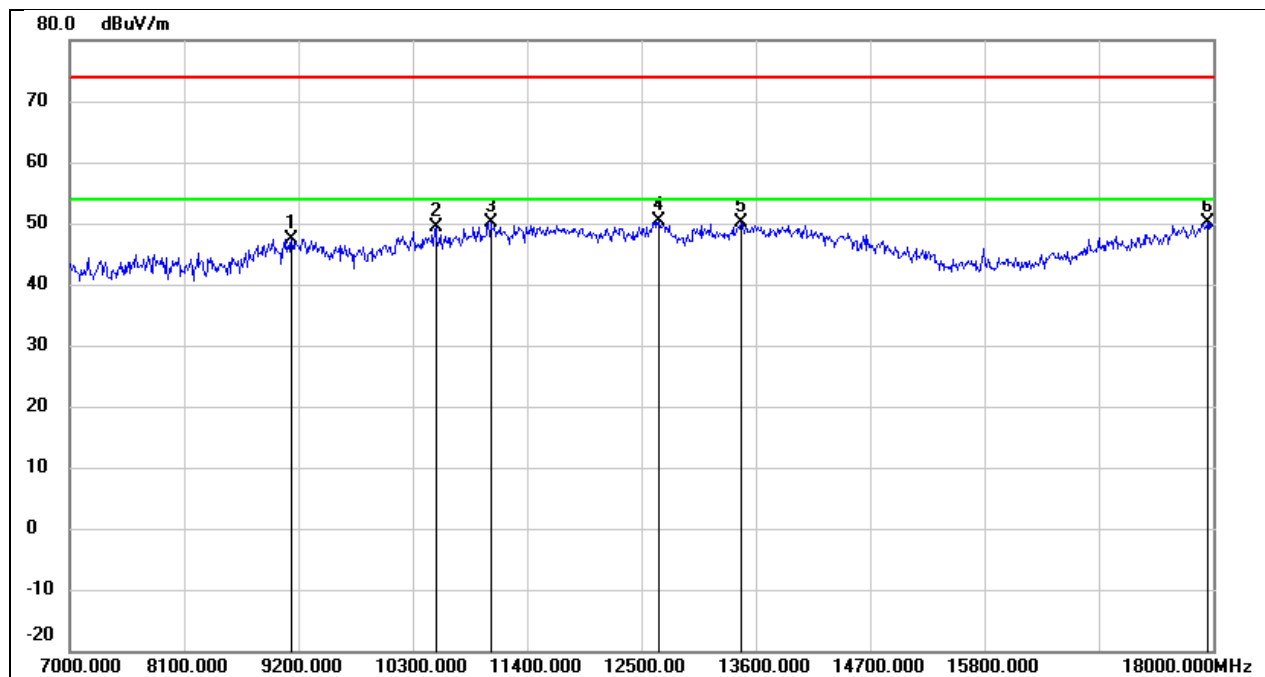


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.94	10.41	47.35	74.00	-26.65	peak
2	10520.000	36.47	12.90	49.37	74.00	-24.63	peak
3	11048.000	35.16	14.91	50.07	74.00	-23.93	peak
4	12665.000	32.28	18.04	50.32	74.00	-23.68	peak
5	13457.000	29.59	20.46	50.05	74.00	-23.95	peak
6	17945.000	24.44	25.75	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3 V

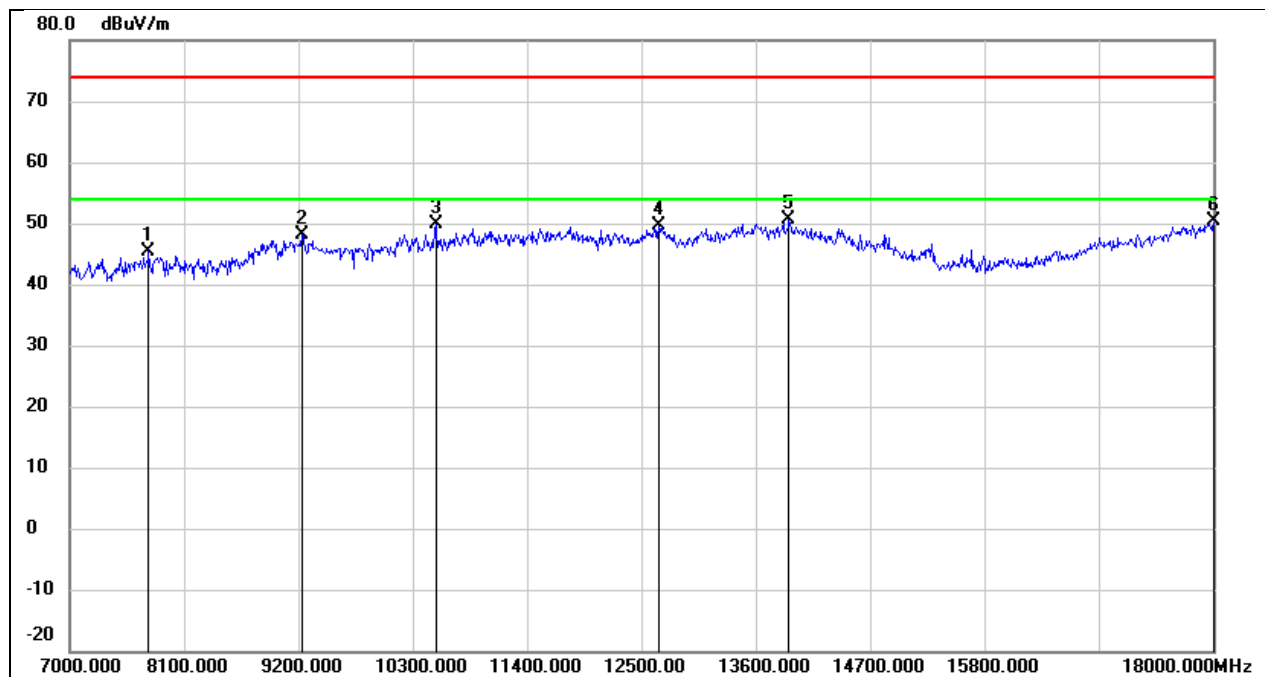


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.000	38.81	6.64	45.45	74.00	-28.55	peak
2	9233.000	37.59	10.48	48.07	74.00	-25.93	peak
3	10520.000	36.90	12.90	49.80	74.00	-24.20	peak
4	12665.000	31.70	18.04	49.74	74.00	-24.26	peak
5	13919.000	29.01	21.68	50.69	74.00	-23.31	peak
6	18000.000	24.35	26.12	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

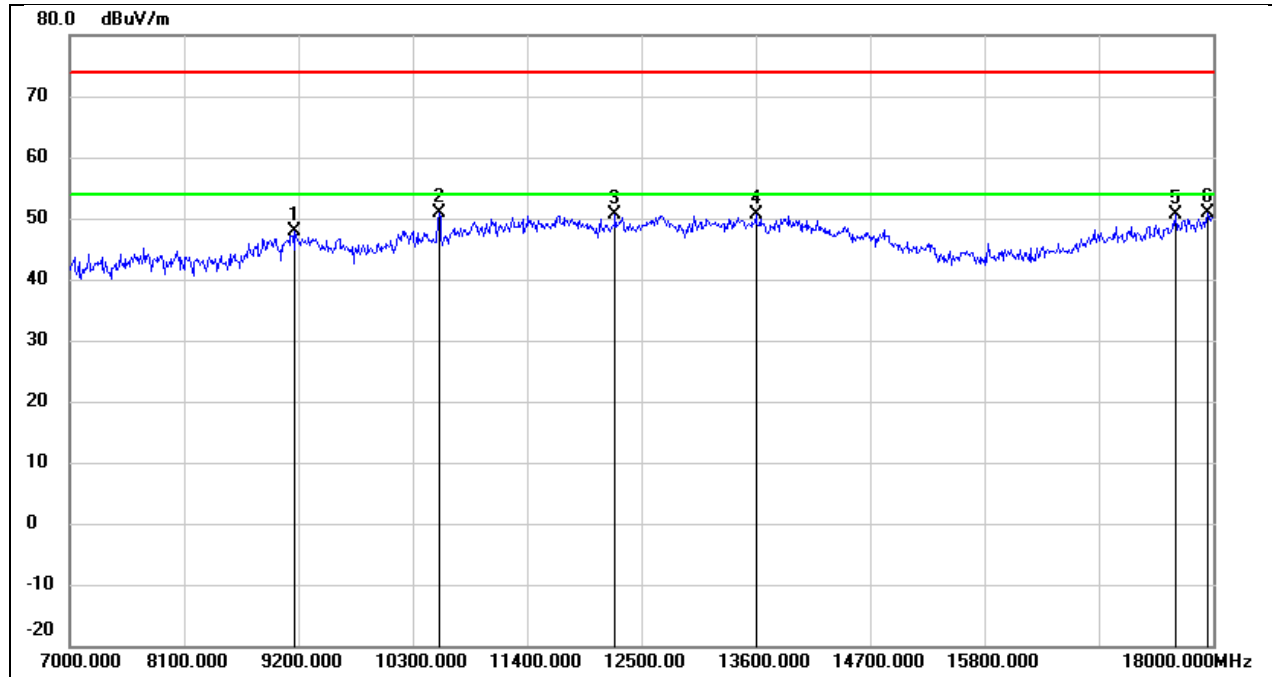


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.48	10.45	47.93	74.00	-26.07	peak
2	10553.000	37.82	13.02	50.84	74.00	-23.16	peak
3	12247.000	32.85	17.77	50.62	74.00	-23.38	peak
4	13600.000	29.71	20.89	50.60	74.00	-23.40	peak
5	17637.000	26.94	23.64	50.58	74.00	-23.42	peak
6	17945.000	25.02	25.75	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3 V

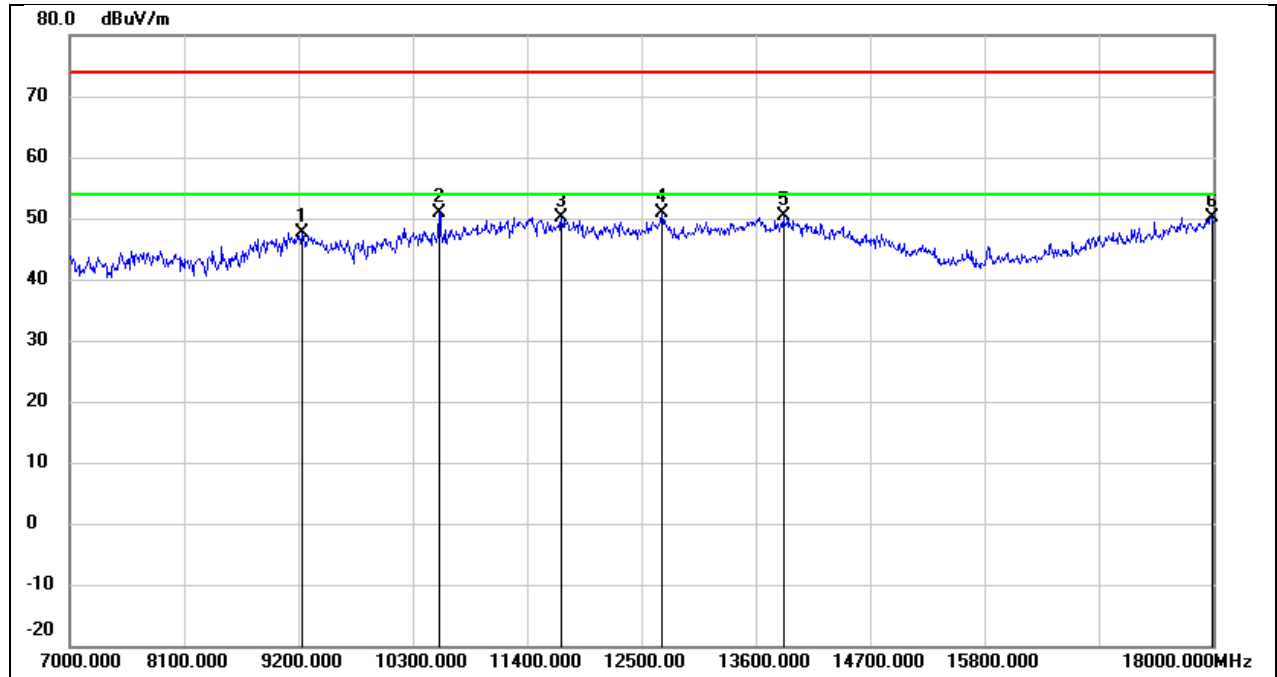


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.18	10.48	47.66	74.00	-26.34	peak
2	10553.000	37.97	13.02	50.99	74.00	-23.01	peak
3	11730.000	32.98	17.19	50.17	74.00	-23.83	peak
4	12698.000	32.85	18.08	50.93	74.00	-23.07	peak
5	13864.000	28.81	21.53	50.34	74.00	-23.66	peak
6	17989.000	24.09	26.04	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

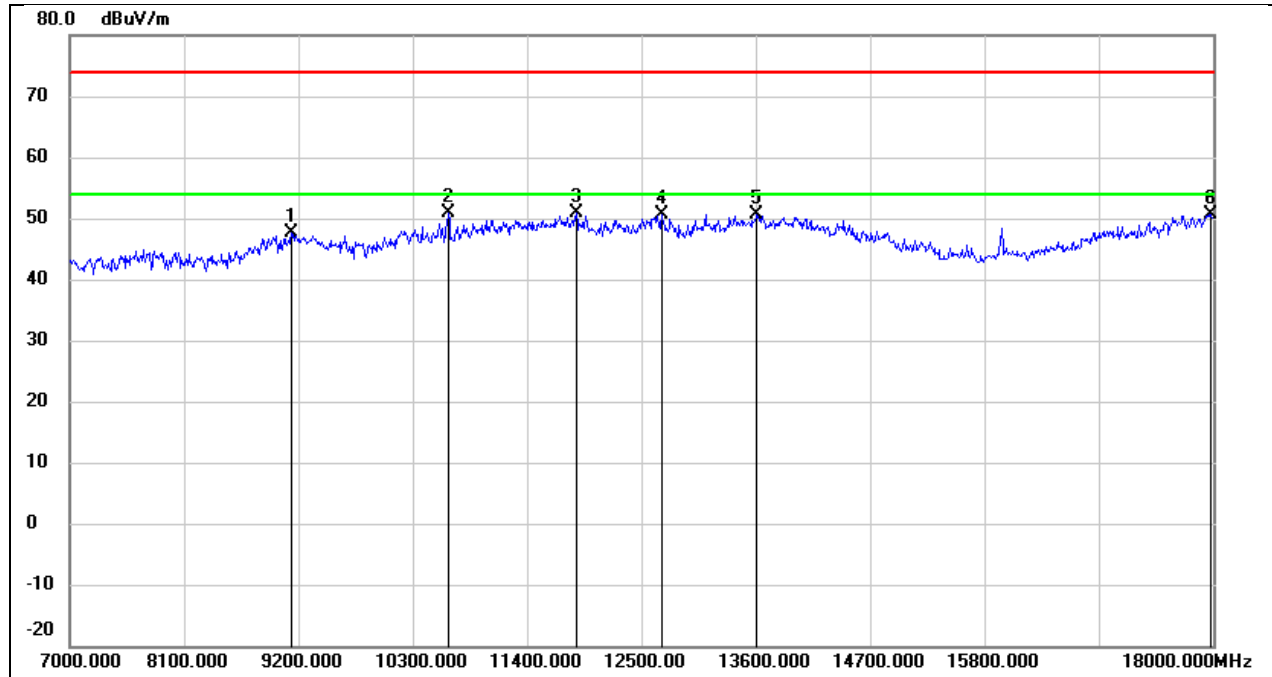


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.15	10.41	47.56	74.00	-26.44	peak
2	10641.000	37.63	13.36	50.99	74.00	-23.01	peak
3	11873.000	33.40	17.46	50.86	74.00	-23.14	peak
4	12698.000	32.51	18.08	50.59	74.00	-23.41	peak
5	13611.000	29.71	20.92	50.63	74.00	-23.37	peak
6	17978.000	24.73	25.97	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3 V

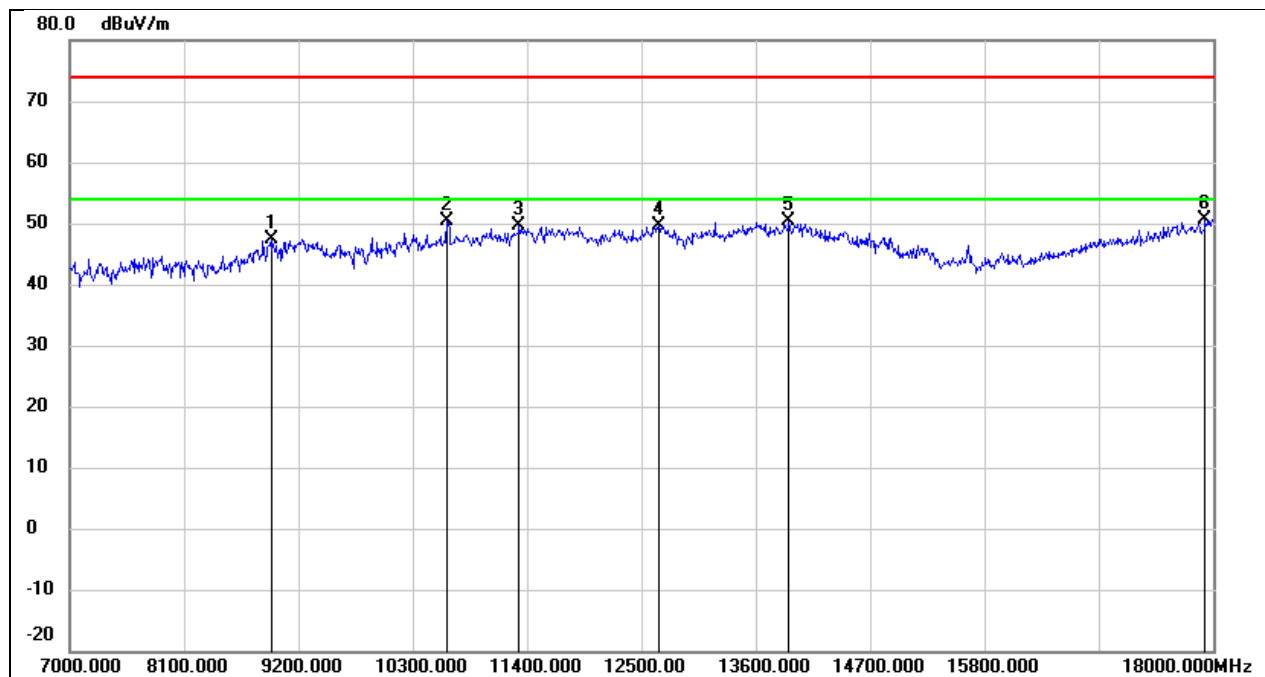


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.54	9.90	47.44	74.00	-26.56	peak
2	10630.000	36.99	13.31	50.30	74.00	-23.70	peak
3	11323.000	33.58	16.05	49.63	74.00	-24.37	peak
4	12665.000	31.56	18.04	49.60	74.00	-24.40	peak
5	13919.000	28.59	21.68	50.27	74.00	-23.73	peak
6	17923.000	25.06	25.60	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

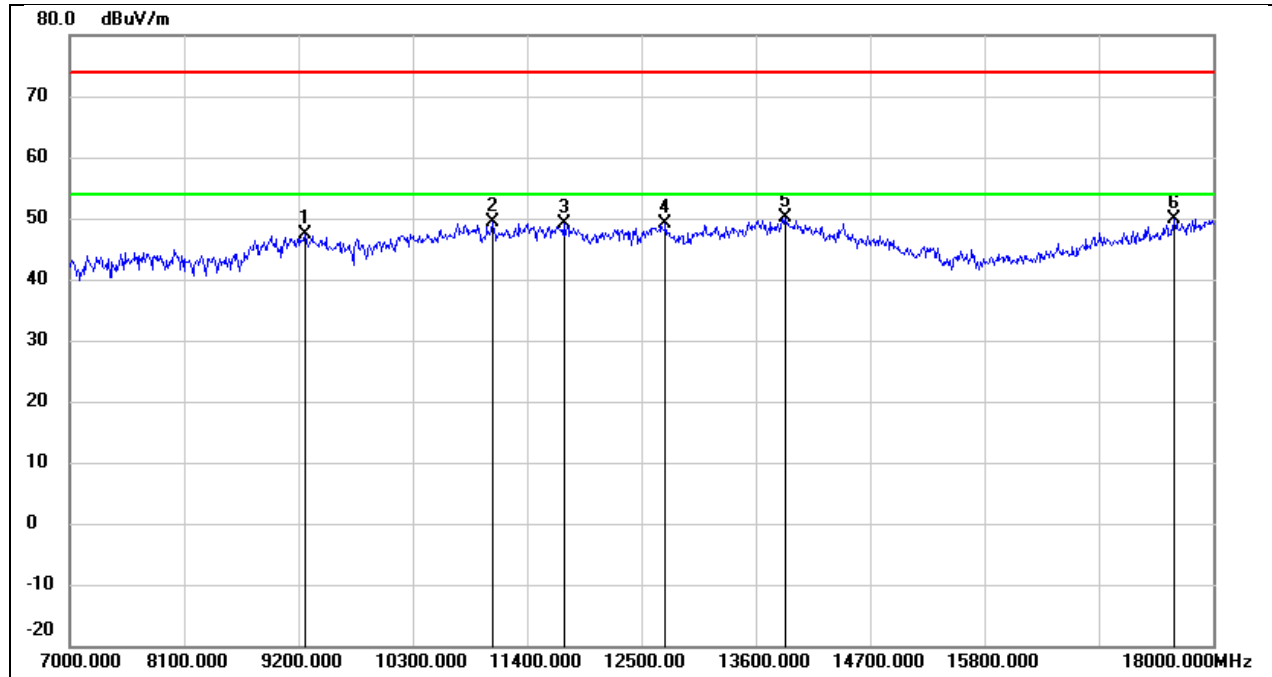


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	36.81	10.51	47.32	74.00	-26.68	peak
2	11070.000	34.27	15.01	49.28	74.00	-24.72	peak
3	11752.000	31.99	17.24	49.23	74.00	-24.77	peak
4	12731.000	30.97	18.12	49.09	74.00	-24.91	peak
5	13886.000	28.65	21.60	50.25	74.00	-23.75	peak
6	17626.000	26.29	23.57	49.86	74.00	-24.14	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3 V

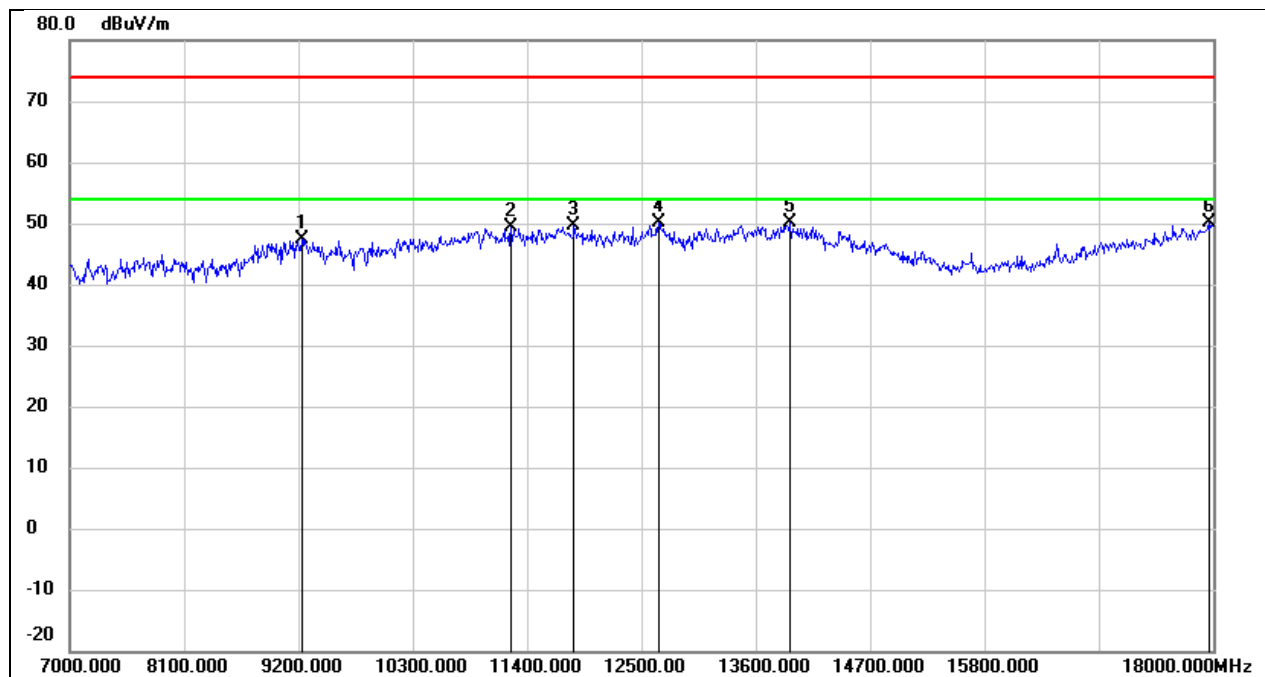


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.79	10.48	47.27	74.00	-26.73	peak
2	11246.000	33.73	15.73	49.46	74.00	-24.54	peak
3	11851.000	32.16	17.43	49.59	74.00	-24.41	peak
4	12665.000	32.21	18.04	50.25	74.00	-23.75	peak
5	13930.000	28.47	21.71	50.18	74.00	-23.82	peak
6	17956.000	24.39	25.82	50.21	74.00	-23.79	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

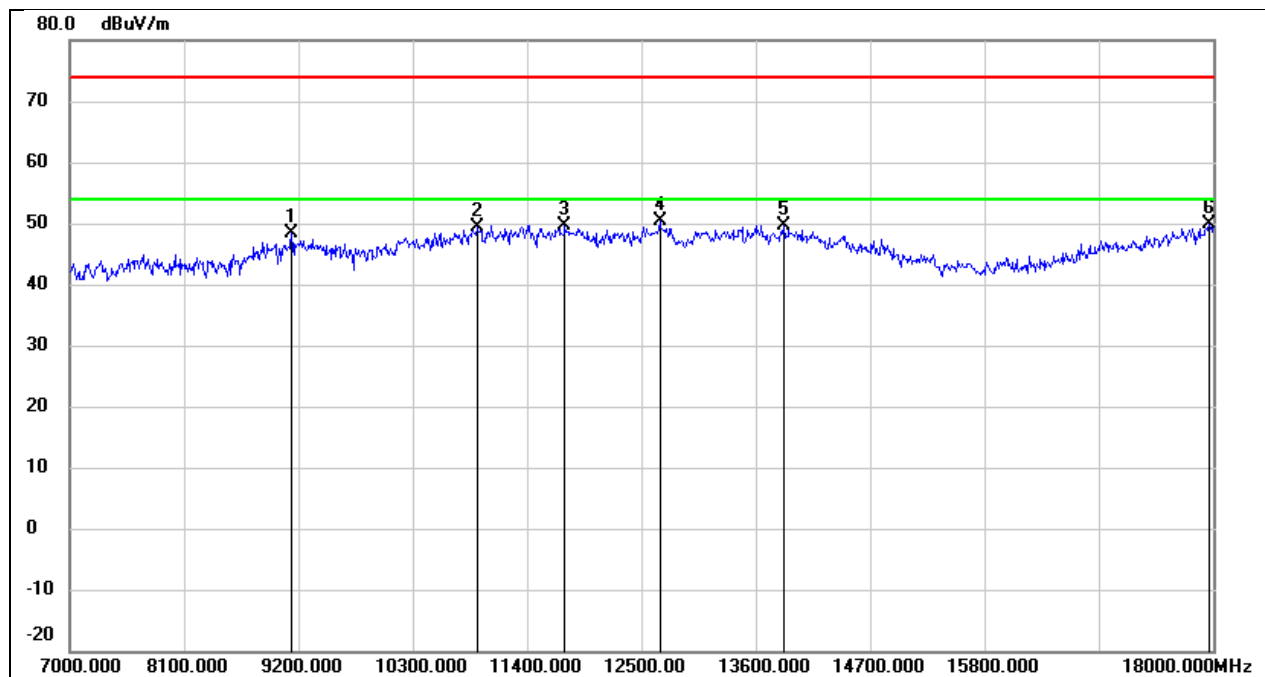


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.90	10.41	48.31	74.00	-25.69	peak
2	10916.000	34.98	14.39	49.37	74.00	-24.63	peak
3	11763.000	32.45	17.26	49.71	74.00	-24.29	peak
4	12676.000	32.37	18.05	50.42	74.00	-23.58	peak
5	13864.000	28.14	21.53	49.67	74.00	-24.33	peak
6	17967.000	24.06	25.89	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3 V

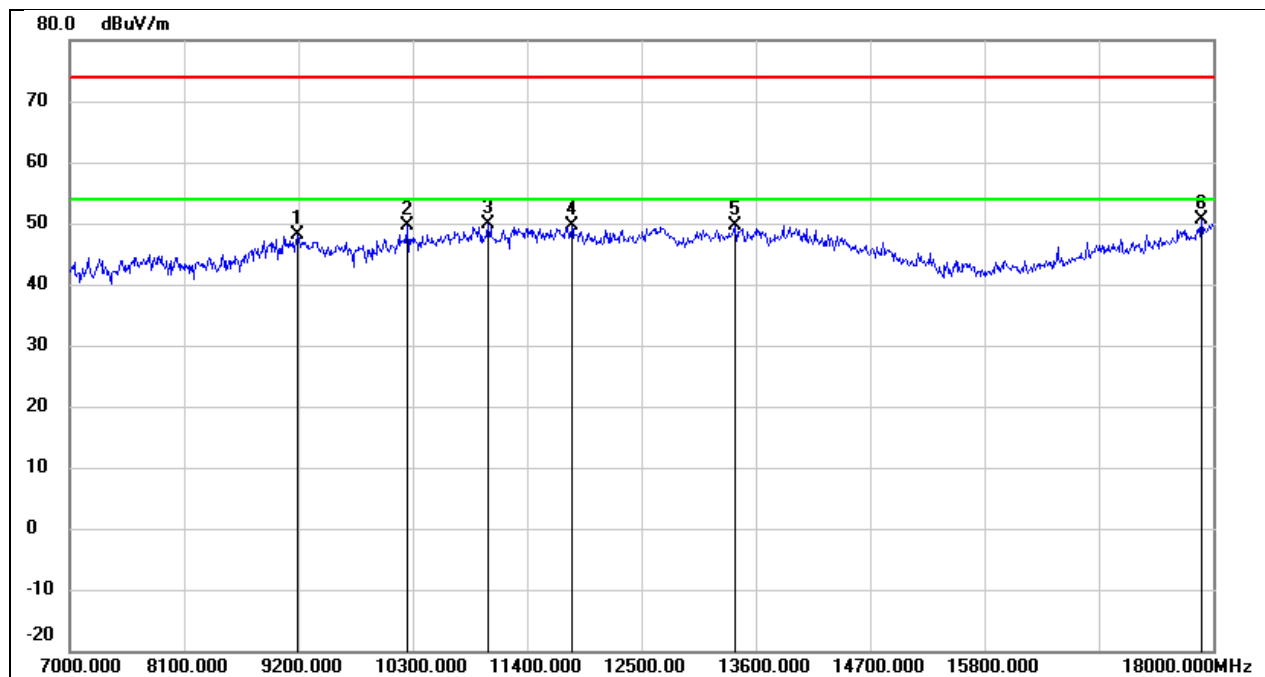


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.60	10.46	48.06	74.00	-25.94	peak
2	10245.000	37.24	12.28	49.52	74.00	-24.48	peak
3	11026.000	35.04	14.82	49.86	74.00	-24.14	peak
4	11829.000	32.20	17.38	49.58	74.00	-24.42	peak
5	13402.000	29.44	20.20	49.64	74.00	-24.36	peak
6	17890.000	25.29	25.37	50.66	74.00	-23.34	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

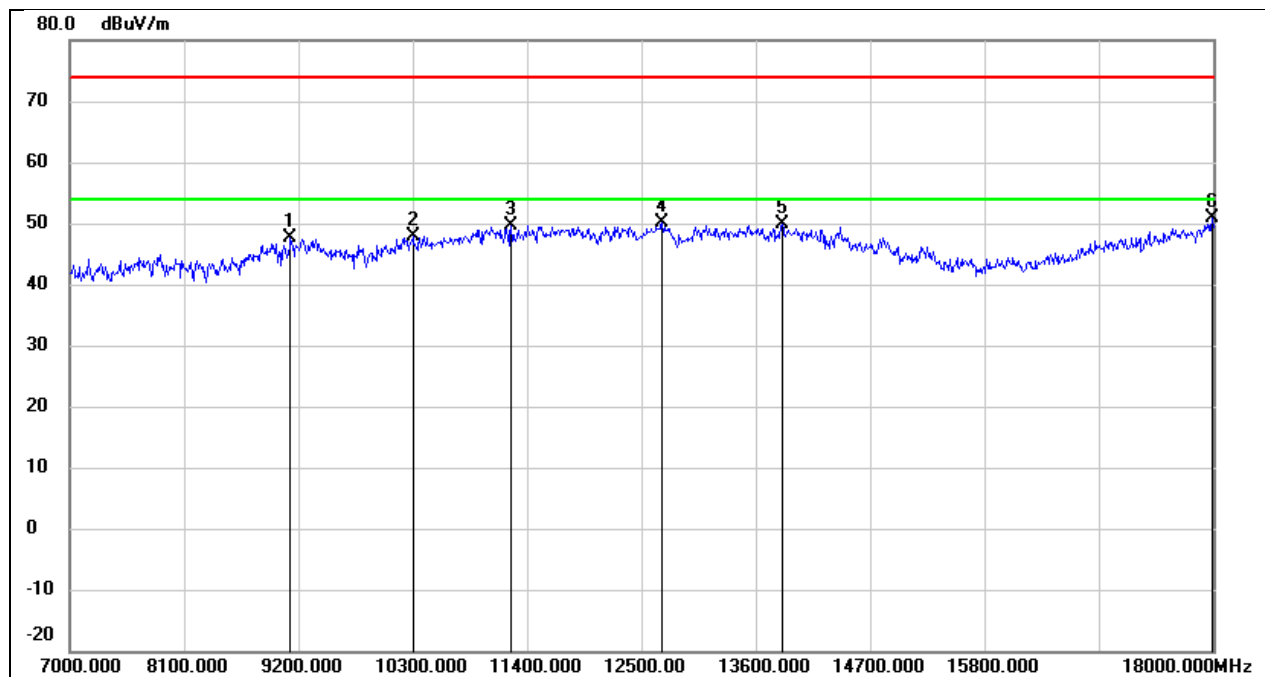


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	37.19	10.42	47.61	74.00	-26.39	peak
2	10300.000	35.51	12.40	47.91	74.00	-26.09	peak
3	11246.000	33.92	15.73	49.65	74.00	-24.35	peak
4	12698.000	32.16	18.08	50.24	74.00	-23.76	peak
5	13853.000	28.41	21.52	49.93	74.00	-24.07	peak
6	17989.000	24.73	26.04	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3 V

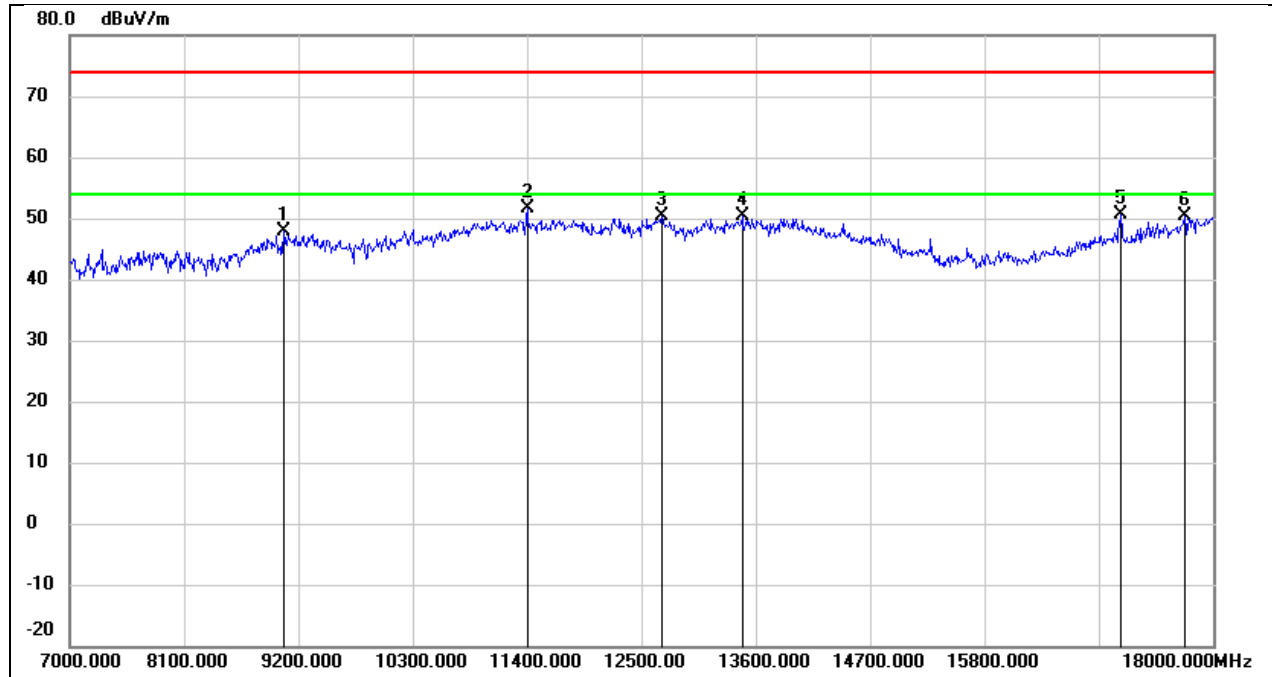


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.61	10.38	47.99	74.00	-26.01	peak
2	11400.000	35.34	16.36	51.70	74.00	-22.30	peak
3	12698.000	32.21	18.08	50.29	74.00	-23.71	peak
4	13468.000	29.76	20.50	50.26	74.00	-23.74	peak
5	17109.000	29.46	21.07	50.53	74.00	-23.47	peak
6	17725.000	26.26	24.24	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

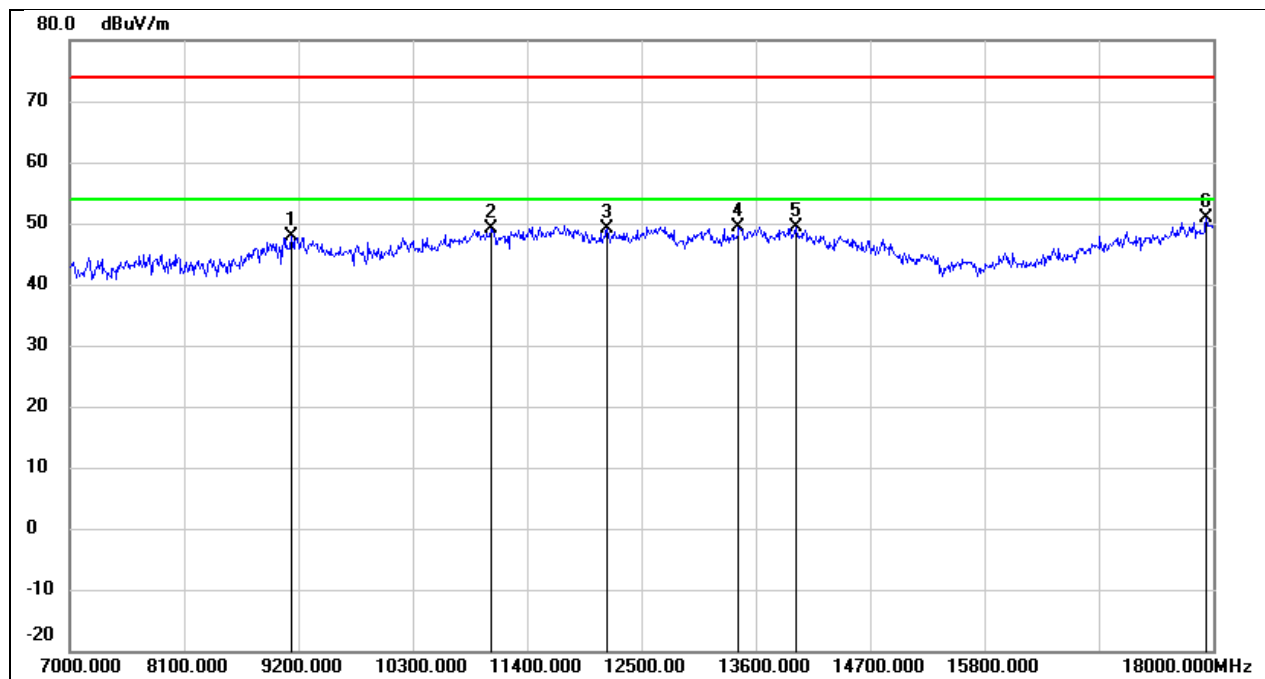


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.35	10.41	47.76	74.00	-26.24	peak
2	11048.000	34.10	14.91	49.01	74.00	-24.99	peak
3	12170.000	31.26	17.75	49.01	74.00	-24.99	peak
4	13435.000	29.00	20.35	49.35	74.00	-24.65	peak
5	13985.000	27.50	21.85	49.35	74.00	-24.65	peak
6	17934.000	25.27	25.67	50.94	74.00	-23.06	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

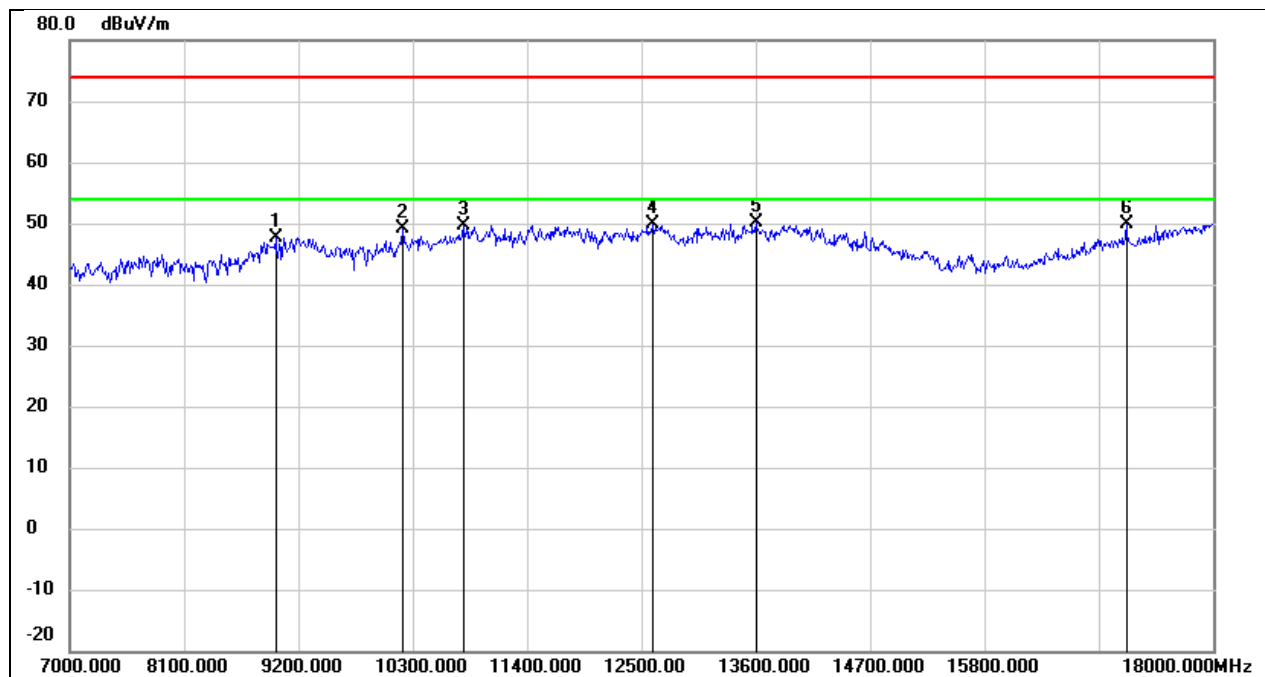


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.42	10.21	47.63	74.00	-26.37	peak
2	10201.000	37.03	12.19	49.22	74.00	-24.78	peak
3	10784.000	35.77	13.91	49.68	74.00	-24.32	peak
4	12610.000	31.79	17.97	49.76	74.00	-24.24	peak
5	13600.000	29.12	20.89	50.01	74.00	-23.99	peak
6	17164.000	28.71	21.29	50.00	74.00	-24.00	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

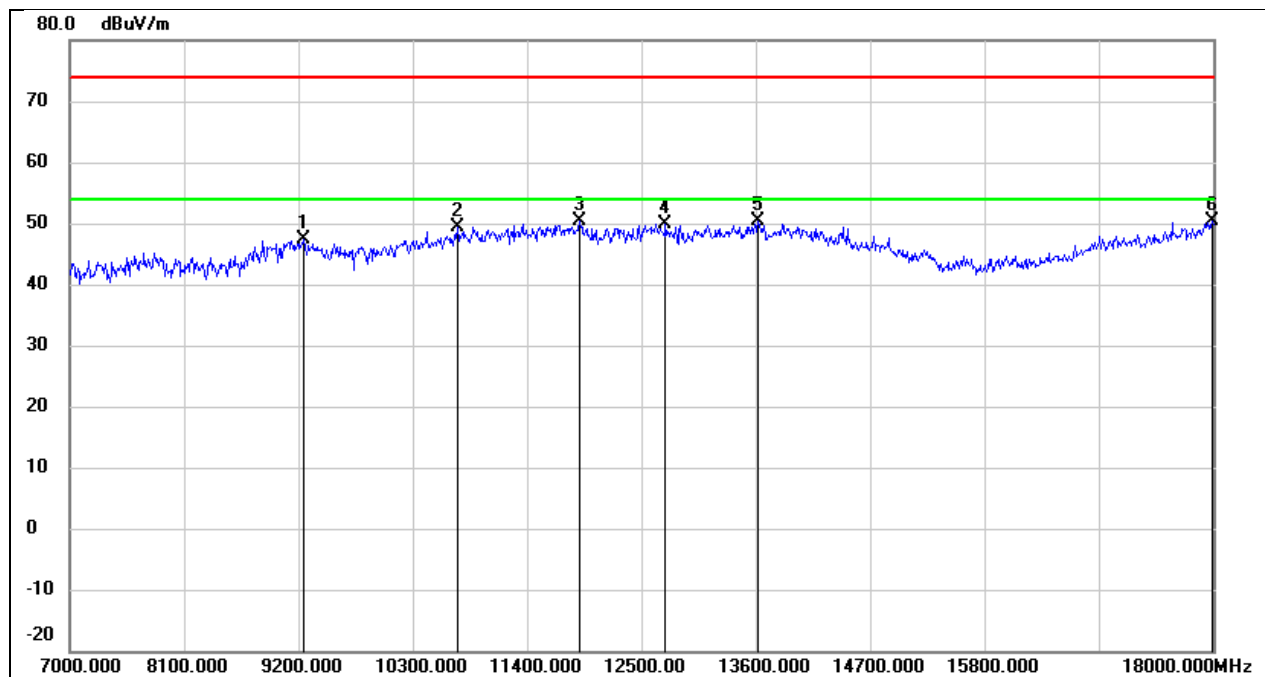


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.85	10.49	47.34	74.00	-26.66	peak
2	10729.000	35.66	13.69	49.35	74.00	-24.65	peak
3	11906.000	32.87	17.52	50.39	74.00	-23.61	peak
4	12731.000	31.69	18.12	49.81	74.00	-24.19	peak
5	13622.000	29.48	20.95	50.43	74.00	-23.57	peak
6	17989.000	24.35	26.04	50.39	74.00	-23.61	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

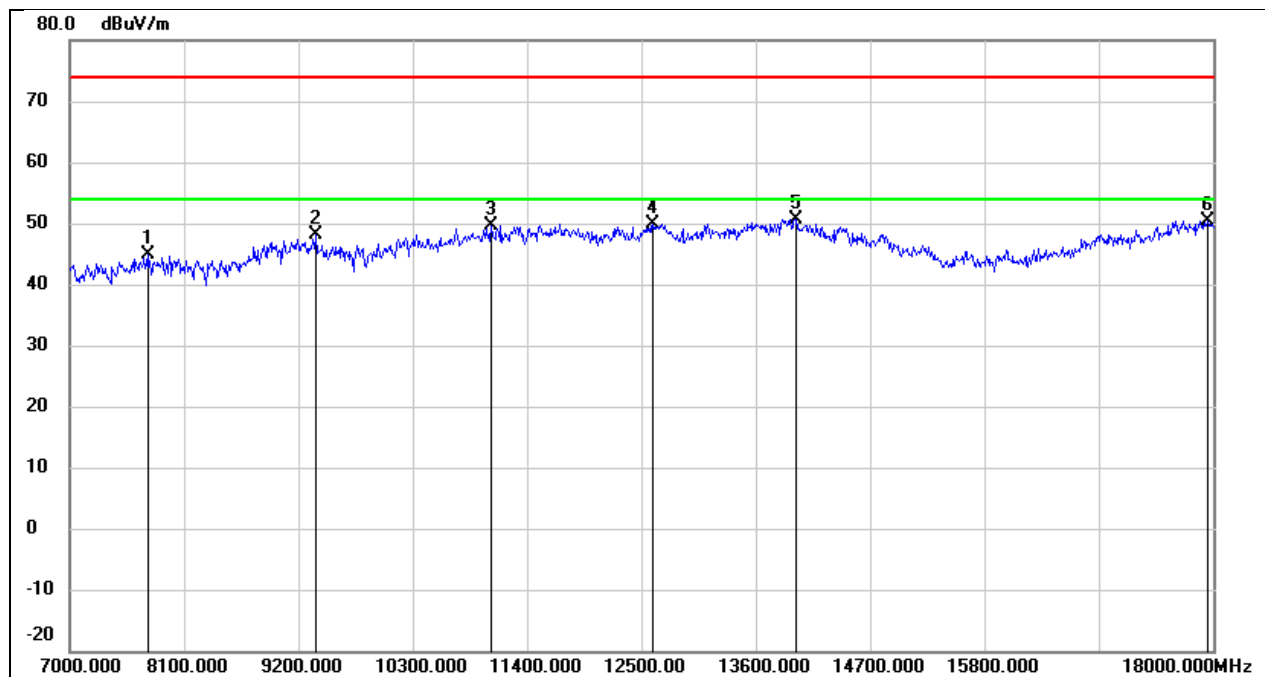


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	38.24	6.66	44.90	74.00	-29.10	peak
2	9365.000	37.48	10.57	48.05	74.00	-25.95	peak
3	11048.000	34.78	14.91	49.69	74.00	-24.31	peak
4	12610.000	31.83	17.97	49.80	74.00	-24.20	peak
5	13985.000	28.87	21.85	50.72	74.00	-23.28	peak
6	17945.000	24.73	25.75	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

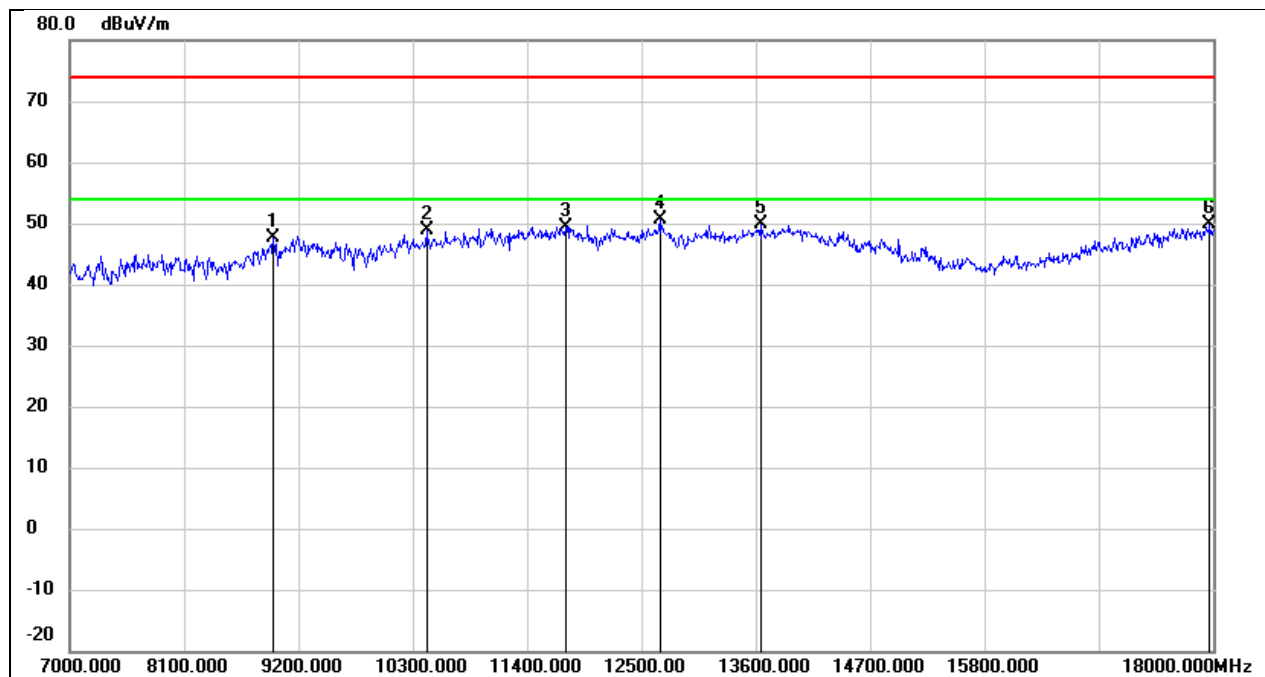


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.52	10.05	47.57	74.00	-26.43	peak
2	10432.000	36.28	12.67	48.95	74.00	-25.05	peak
3	11774.000	32.21	17.28	49.49	74.00	-24.51	peak
4	12676.000	32.50	18.05	50.55	74.00	-23.45	peak
5	13644.000	28.82	20.99	49.81	74.00	-24.19	peak
6	17967.000	23.88	25.89	49.77	74.00	-24.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

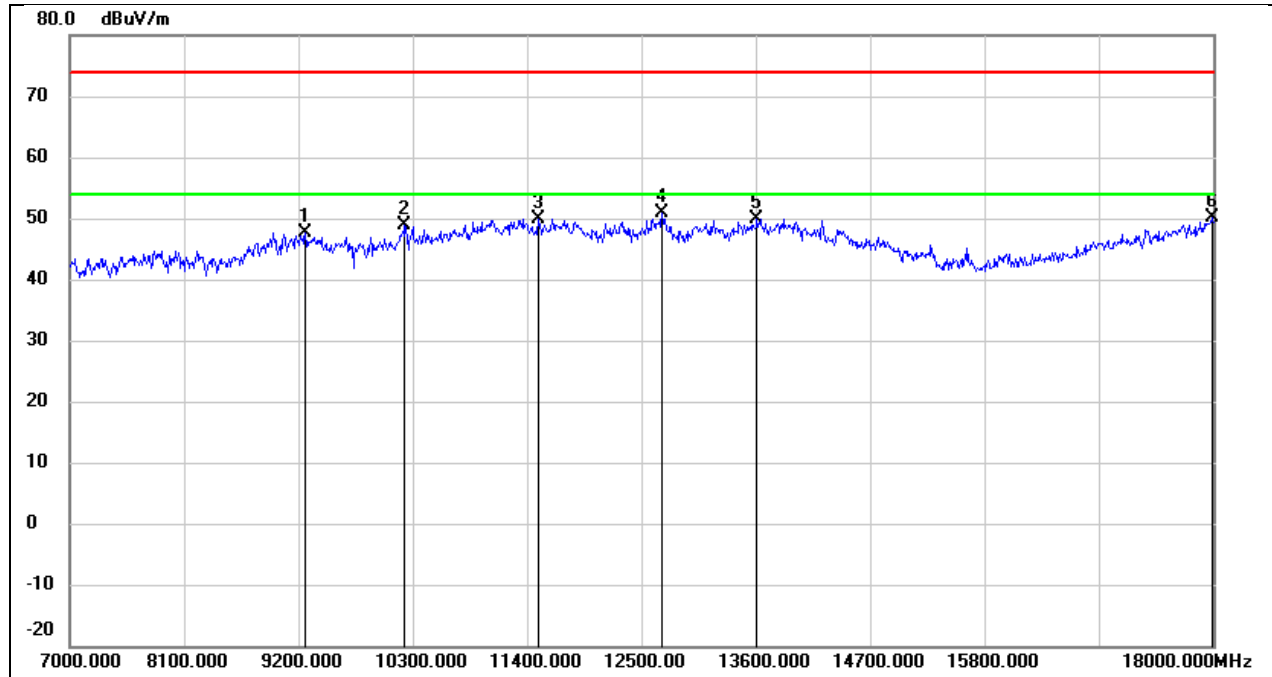


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.22	10.51	47.73	74.00	-26.27	peak
2	10223.000	36.61	12.24	48.85	74.00	-25.15	peak
3	11510.000	33.16	16.79	49.95	74.00	-24.05	peak
4	12698.000	32.80	18.08	50.88	74.00	-23.12	peak
5	13611.000	28.93	20.92	49.85	74.00	-24.15	peak
6	17989.000	24.12	26.04	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

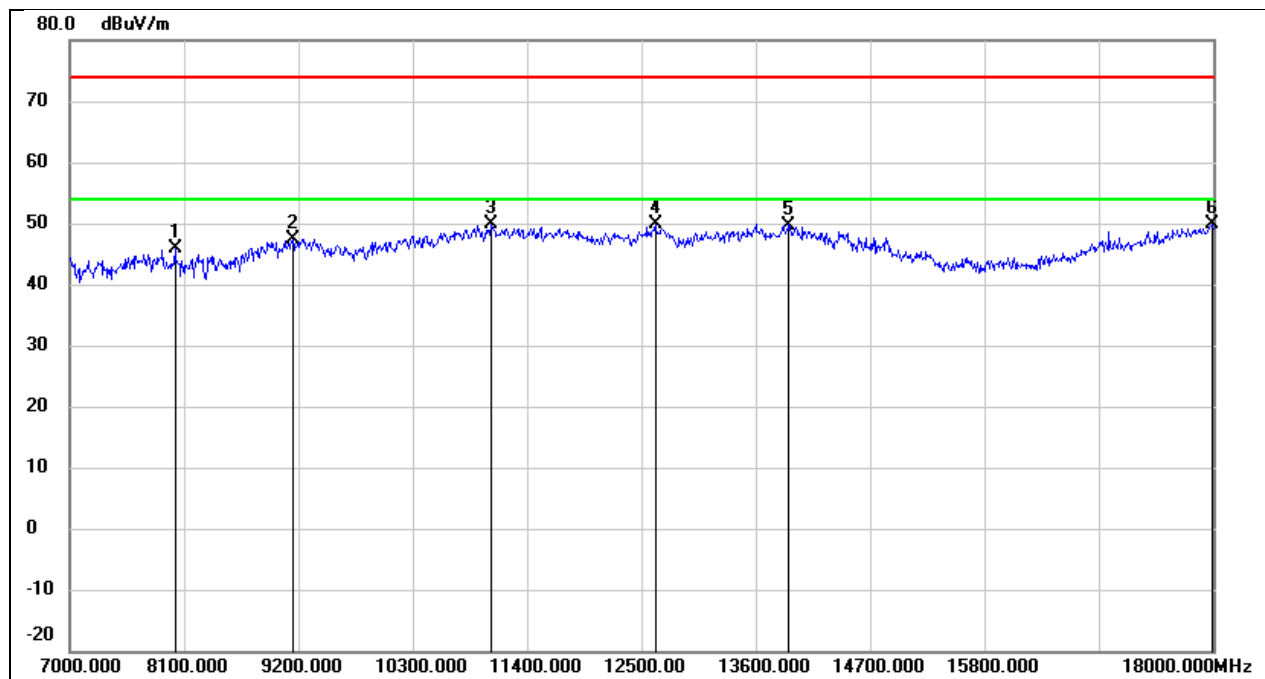


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8012.000	39.39	6.44	45.83	74.00	-28.17	peak
2	9145.000	36.91	10.43	47.34	74.00	-26.66	peak
3	11059.000	34.90	14.96	49.86	74.00	-24.14	peak
4	12632.000	31.85	17.99	49.84	74.00	-24.16	peak
5	13919.000	28.07	21.68	49.75	74.00	-24.25	peak
6	17989.000	23.78	26.04	49.82	74.00	-24.18	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

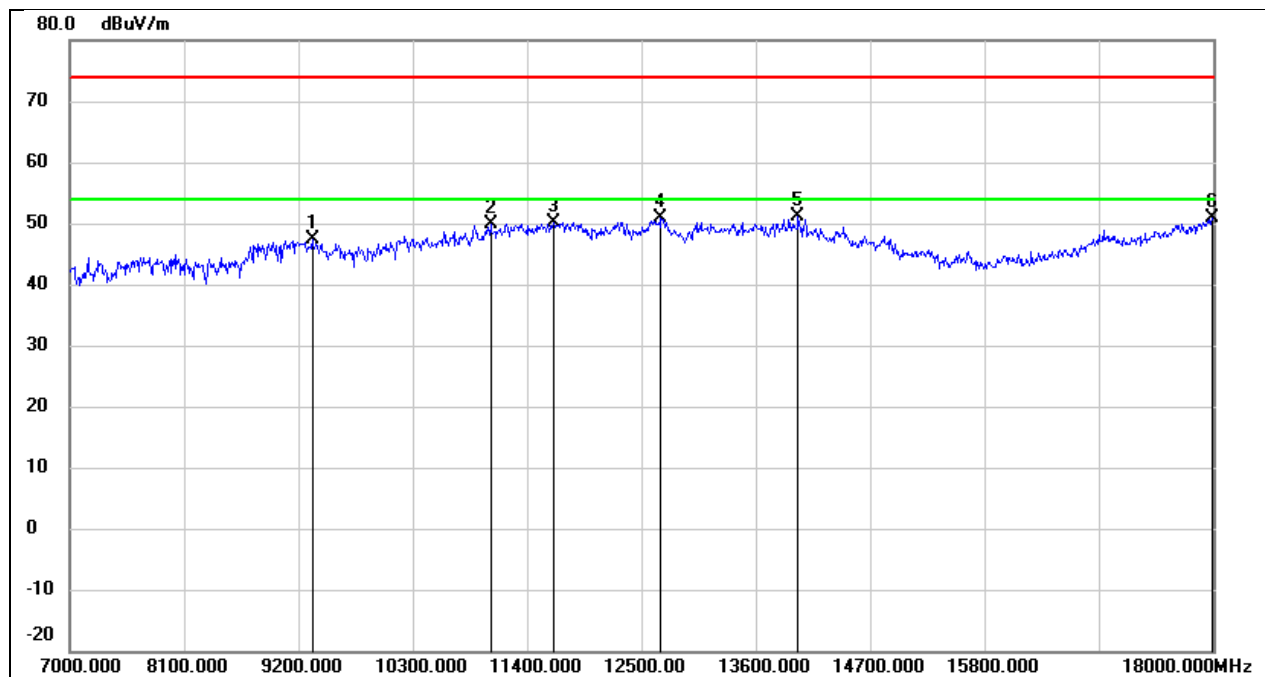


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.86	10.54	47.40	74.00	-26.60	peak
2	11048.000	35.09	14.91	50.00	74.00	-24.00	peak
3	11653.000	33.13	17.05	50.18	74.00	-23.82	peak
4	12687.000	32.93	18.05	50.98	74.00	-23.02	peak
5	14007.000	29.27	21.85	51.12	74.00	-22.88	peak
6	17989.000	24.88	26.04	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

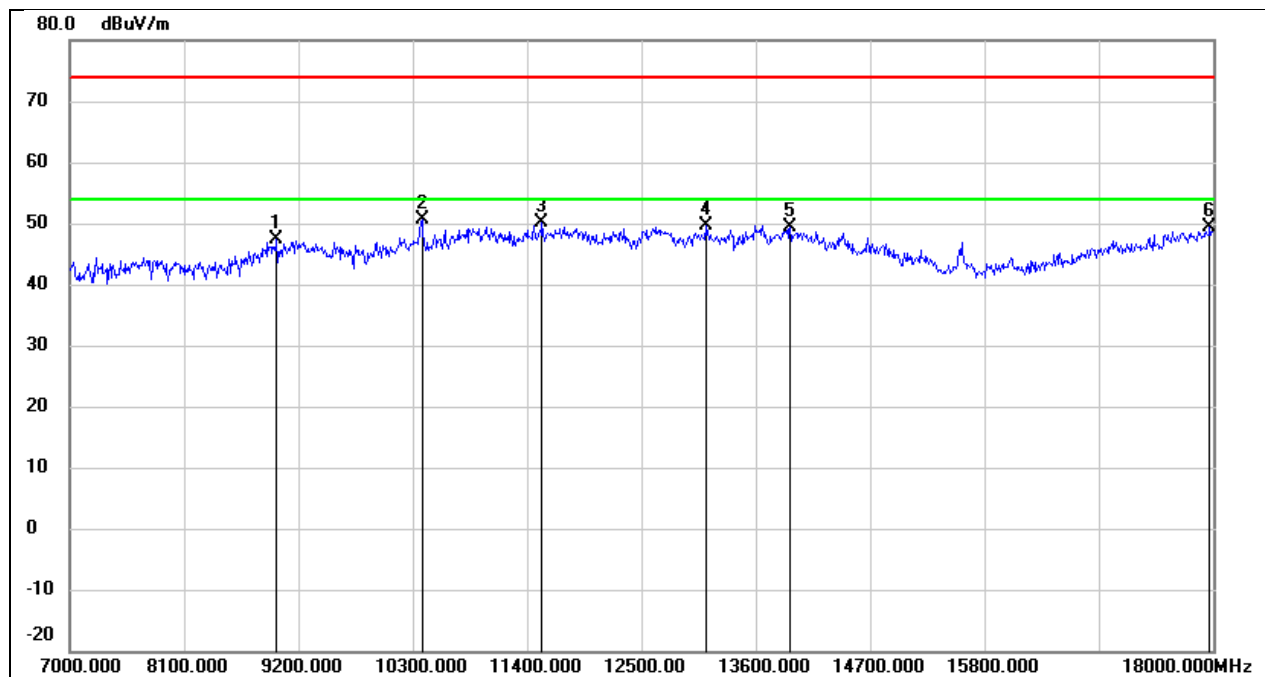


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.12	10.28	47.40	74.00	-26.60	peak
2	10388.000	38.14	12.59	50.73	74.00	-23.27	peak
3	11543.000	33.34	16.84	50.18	74.00	-23.82	peak
4	13116.000	30.63	18.96	49.59	74.00	-24.41	peak
5	13930.000	27.77	21.71	49.48	74.00	-24.52	peak
6	17967.000	23.41	25.89	49.30	74.00	-24.70	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3 V

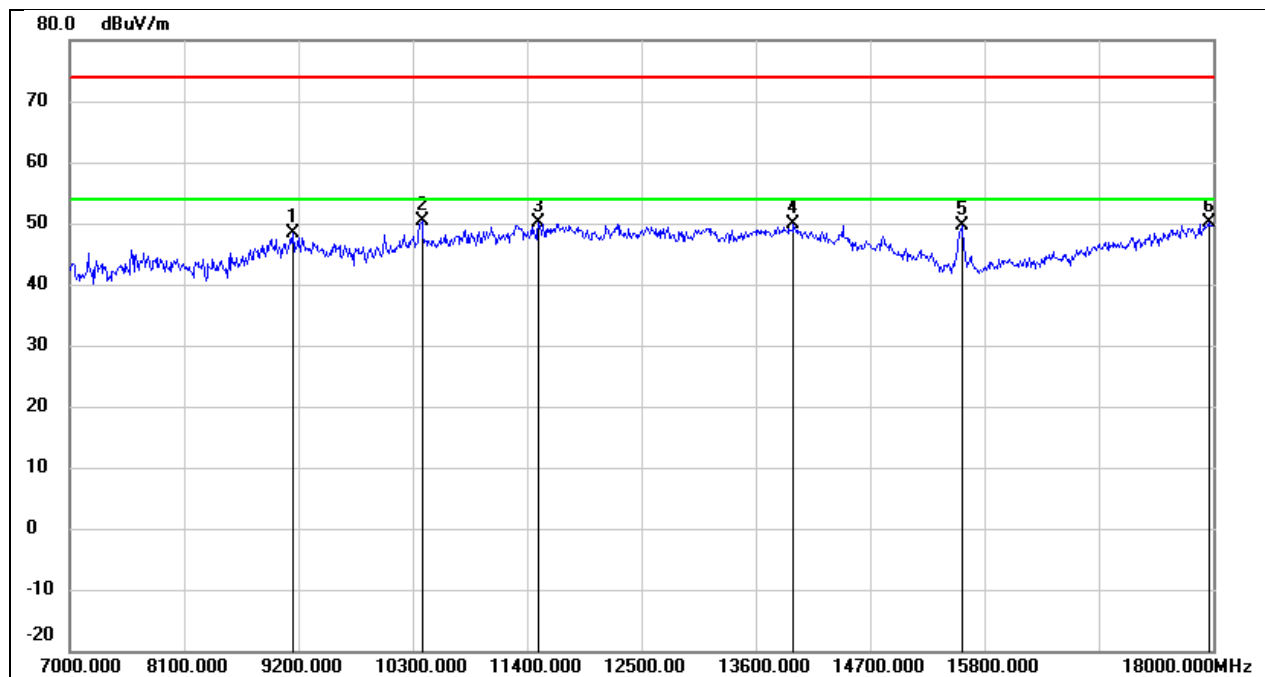


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.93	10.43	48.36	74.00	-25.64	peak
2	10388.000	37.87	12.59	50.46	74.00	-23.54	peak
3	11510.000	33.27	16.79	50.06	74.00	-23.94	peak
4	13963.000	28.14	21.78	49.92	74.00	-24.08	peak
5	15580.000	32.89	16.75	49.64	74.00	-24.36	peak
6	17956.000	24.25	25.82	50.07	74.00	-23.93	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

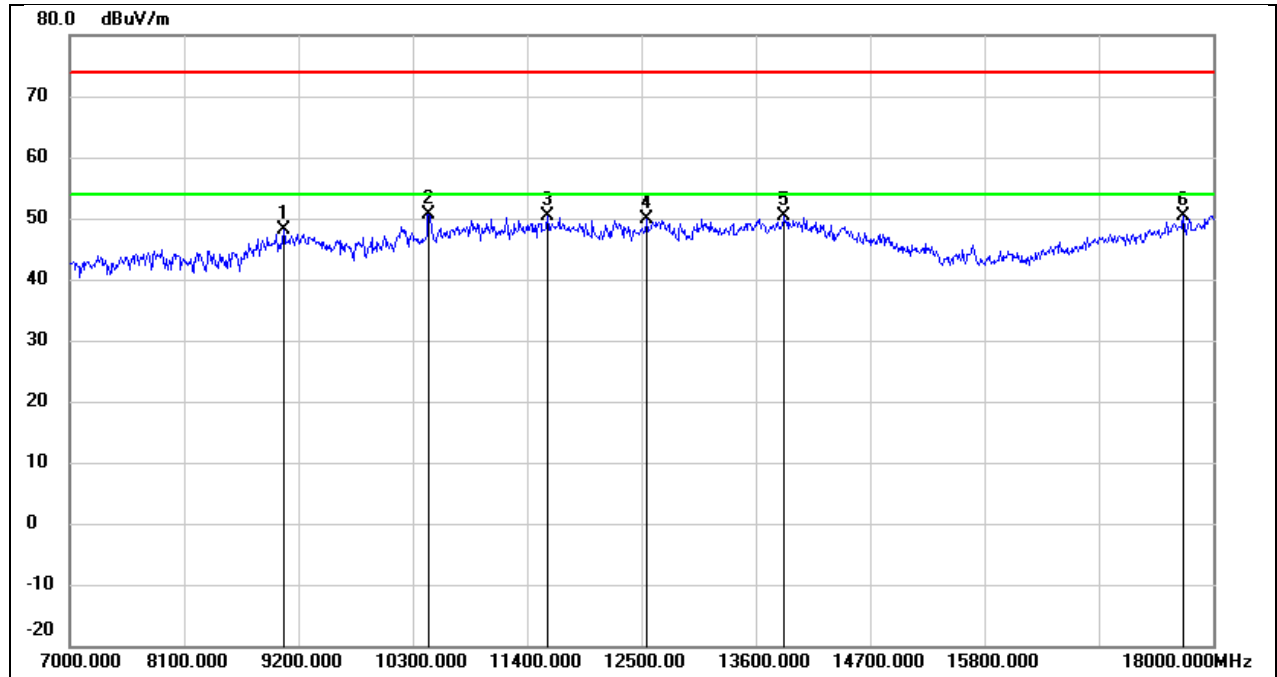


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.66	10.38	48.04	74.00	-25.96	peak
2	10454.000	37.87	12.73	50.60	74.00	-23.40	peak
3	11598.000	33.49	16.96	50.45	74.00	-23.55	peak
4	12555.000	32.00	17.90	49.90	74.00	-24.10	peak
5	13875.000	28.90	21.57	50.47	74.00	-23.53	peak
6	17714.000	26.21	24.16	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3 V

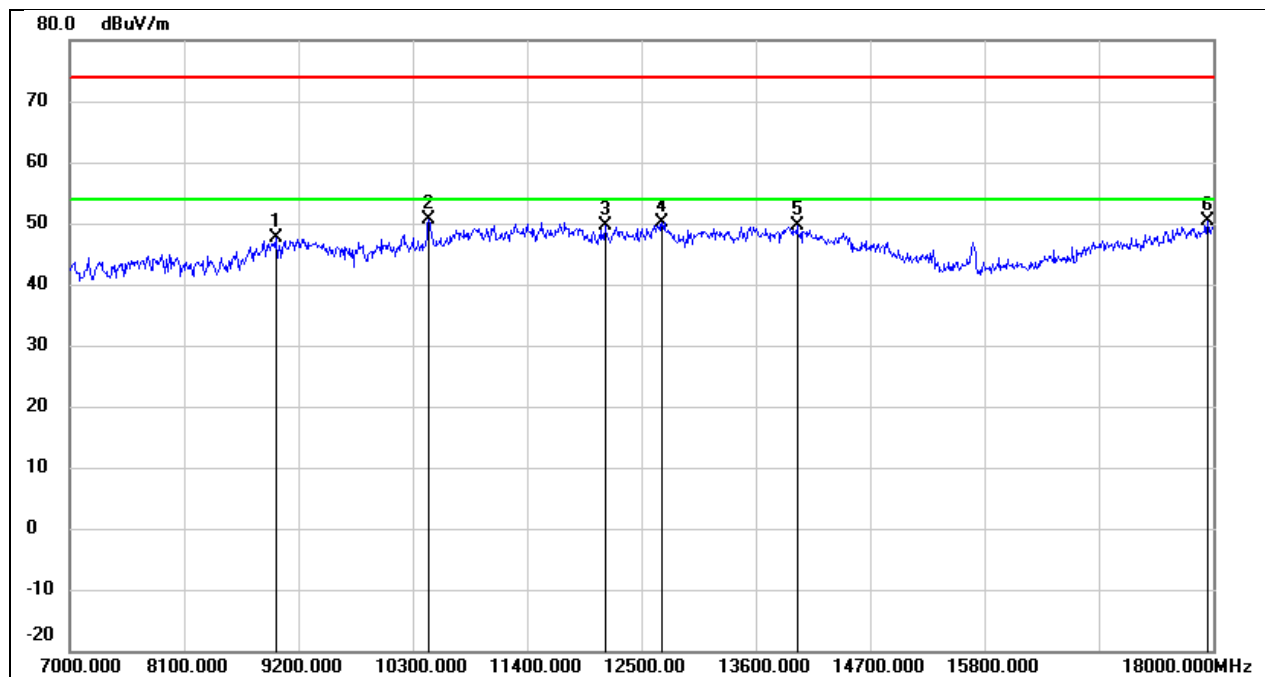


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.43	10.21	47.64	74.00	-26.36	peak
2	10454.000	37.93	12.73	50.66	74.00	-23.34	peak
3	12148.000	31.98	17.74	49.72	74.00	-24.28	peak
4	12698.000	32.01	18.08	50.09	74.00	-23.91	peak
5	13996.000	27.77	21.87	49.64	74.00	-24.36	peak
6	17945.000	24.53	25.75	50.28	74.00	-23.72	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

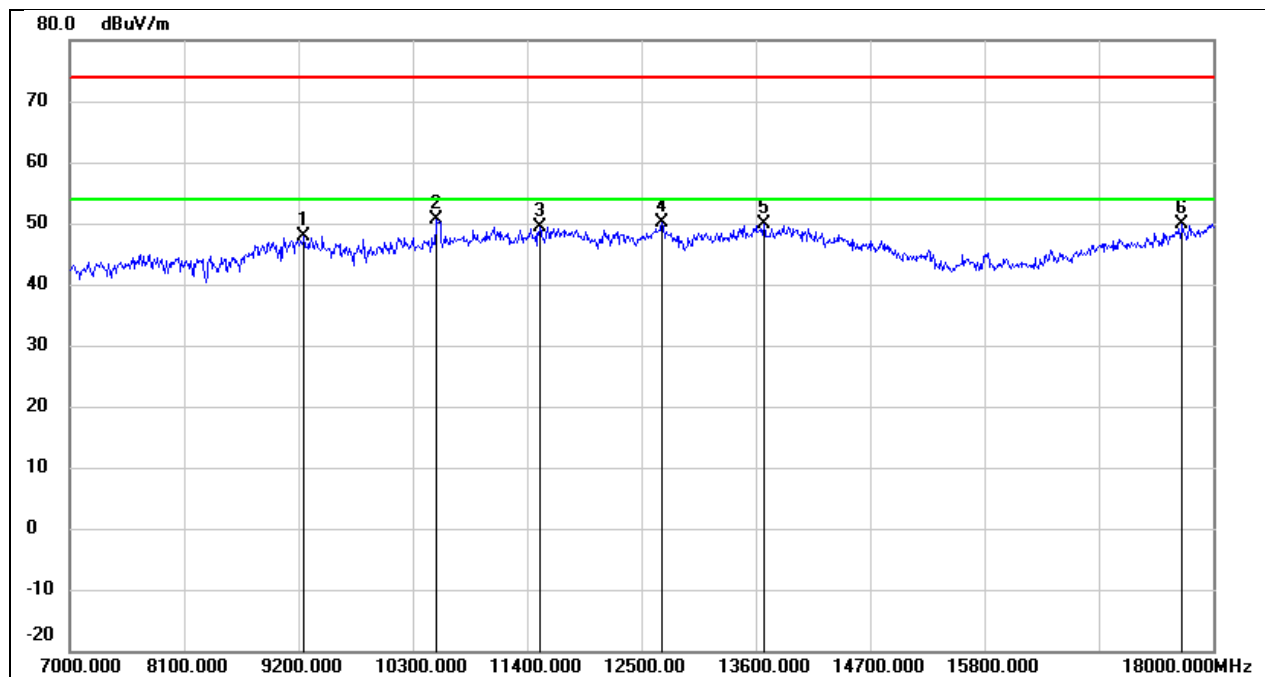


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.43	10.51	47.94	74.00	-26.06	peak
2	10531.000	37.59	12.94	50.53	74.00	-23.47	peak
3	11521.000	32.50	16.82	49.32	74.00	-24.68	peak
4	12698.000	32.04	18.08	50.12	74.00	-23.88	peak
5	13677.000	28.69	21.08	49.77	74.00	-24.23	peak
6	17703.000	25.78	24.09	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3 V

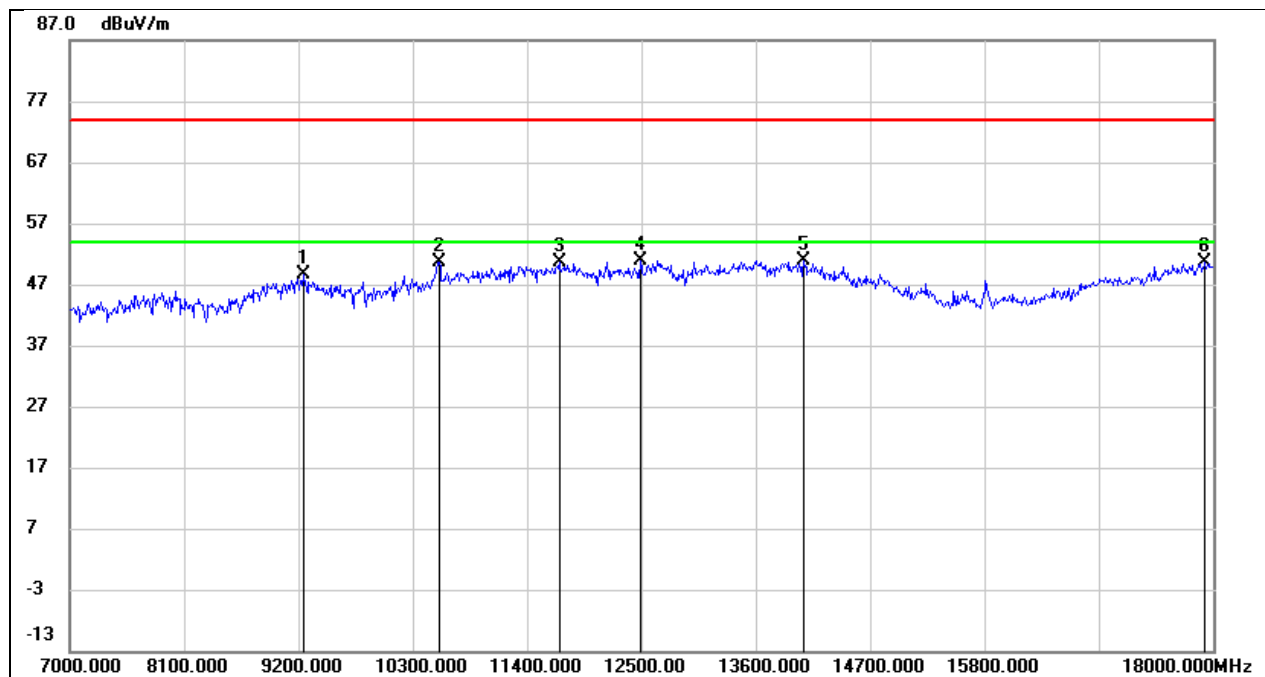


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.09	10.49	48.58	74.00	-25.42	peak
2	10553.000	37.63	13.02	50.65	74.00	-23.35	peak
3	11708.000	33.50	17.16	50.66	74.00	-23.34	peak
4	12489.000	33.06	17.83	50.89	74.00	-23.11	peak
5	14062.000	29.28	21.62	50.90	74.00	-23.10	peak
6	17923.000	25.04	25.60	50.64	74.00	-23.36	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

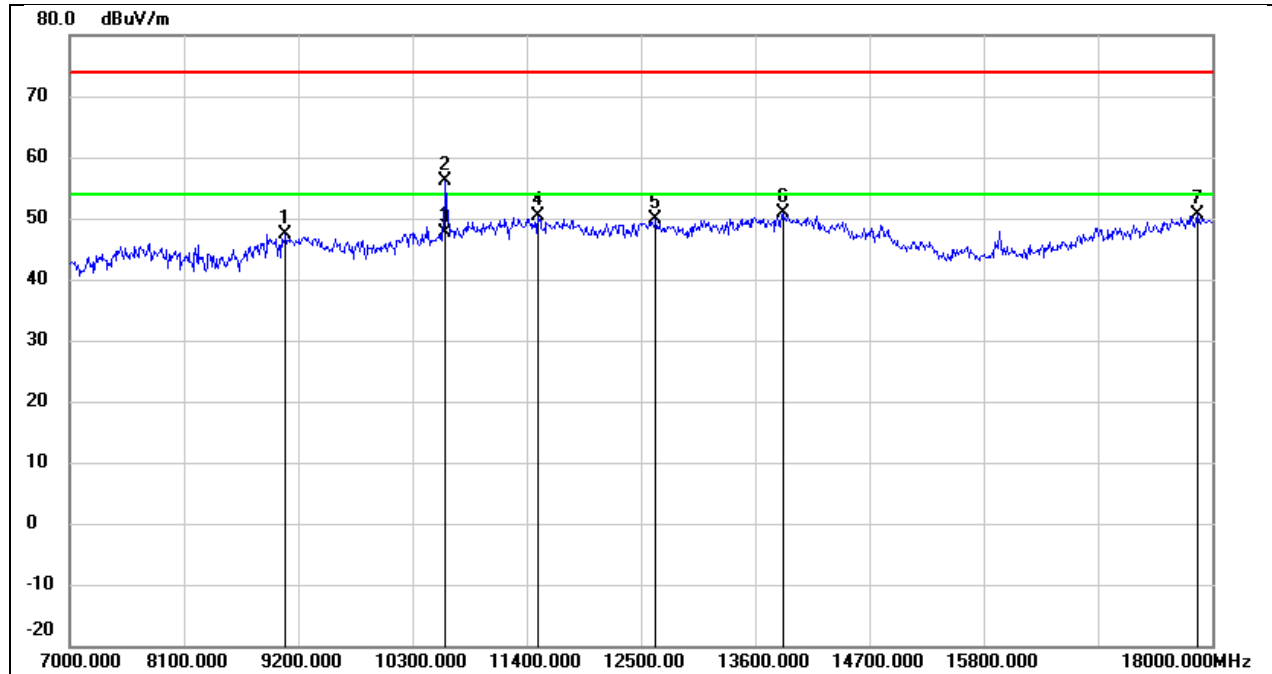


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	37.10	10.39	47.49	74.00	-26.51	peak
2	10619.000	42.83	13.28	56.11	74.00	-17.89	peak
3	10619.000	34.27	13.28	47.55	54.00	-6.45	AVG
4	11510.000	33.70	16.79	50.49	74.00	-23.51	peak
5	12643.000	31.88	18.01	49.89	74.00	-24.11	peak
6	13864.000	29.26	21.53	50.79	74.00	-23.21	peak
7	17857.000	25.59	25.14	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3 V

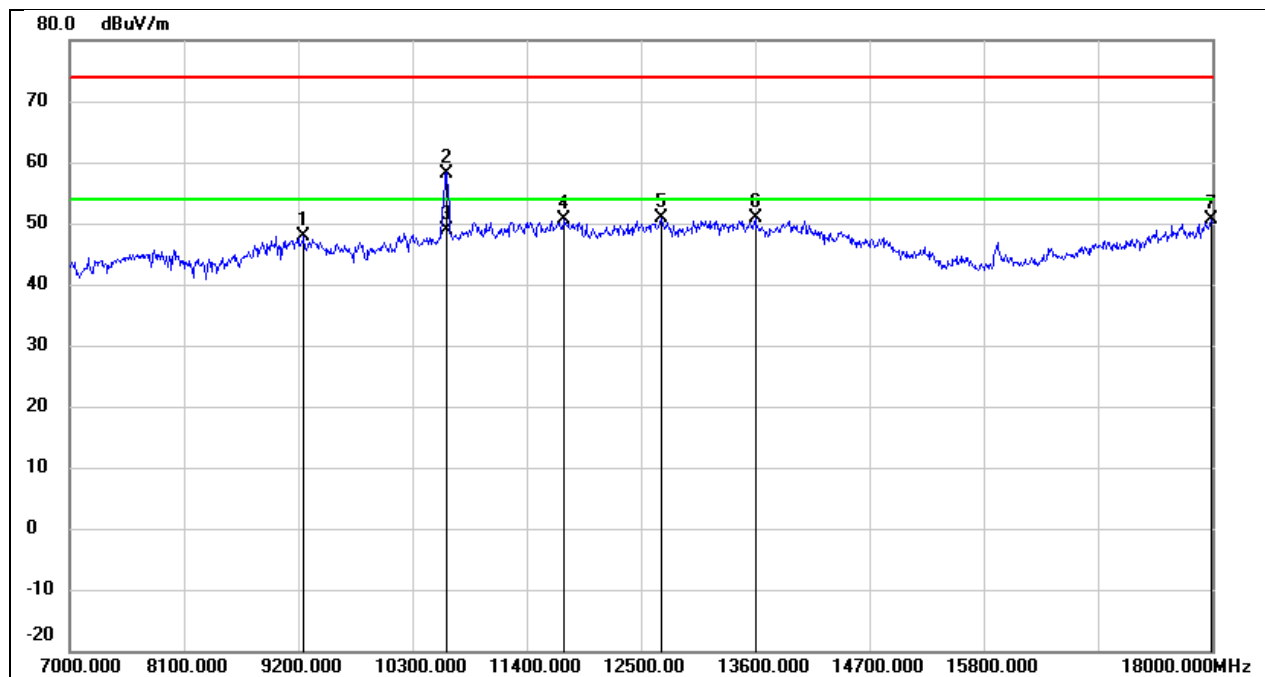


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.34	10.50	47.84	74.00	-26.16	peak
2	10630.000	44.94	13.31	58.25	74.00	-15.75	peak
3	10630.000	35.55	13.31	48.86	54.00	-5.14	AVG
4	11763.000	33.45	17.26	50.71	74.00	-23.29	peak
5	12698.000	32.71	18.08	50.79	74.00	-23.21	peak
6	13600.000	30.07	20.89	50.96	74.00	-23.04	peak
7	17989.000	24.71	26.04	50.75	74.00	-23.25	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

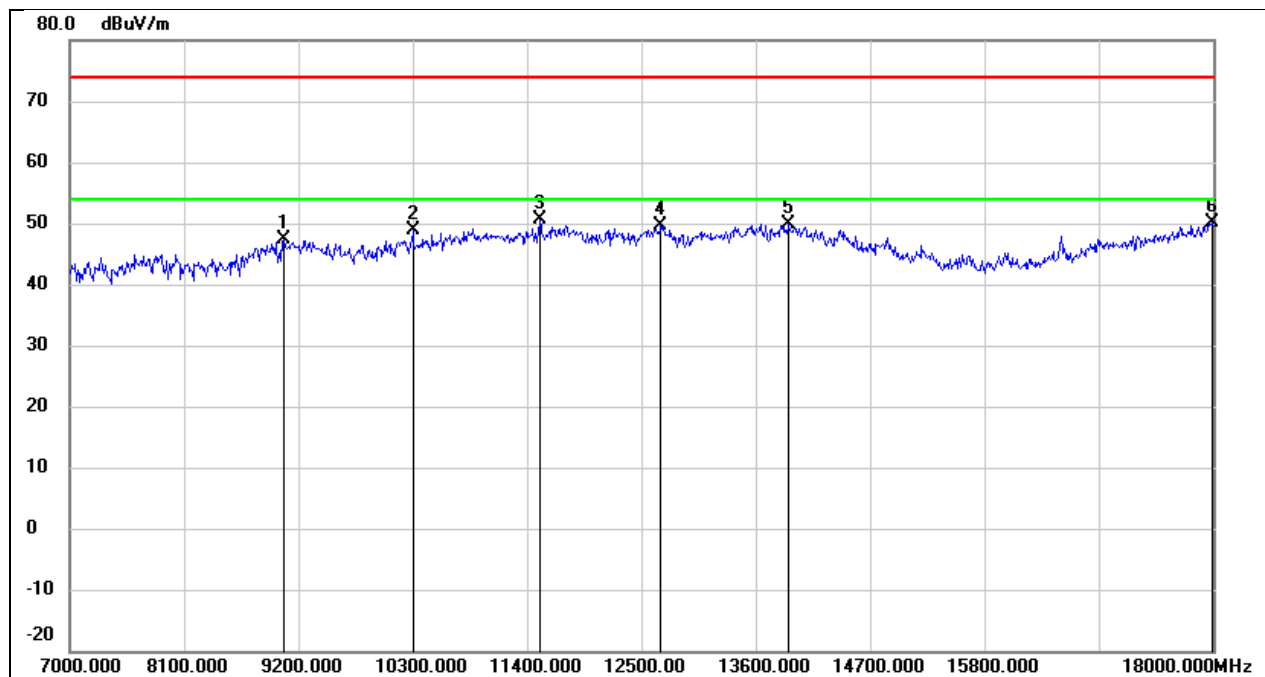


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.01	10.38	47.39	74.00	-26.61	peak
2	10300.000	36.38	12.40	48.78	74.00	-25.22	peak
3	11521.000	33.83	16.82	50.65	74.00	-23.35	peak
4	12687.000	31.69	18.05	49.74	74.00	-24.26	peak
5	13919.000	28.17	21.68	49.85	74.00	-24.15	peak
6	17989.000	24.08	26.04	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3 V

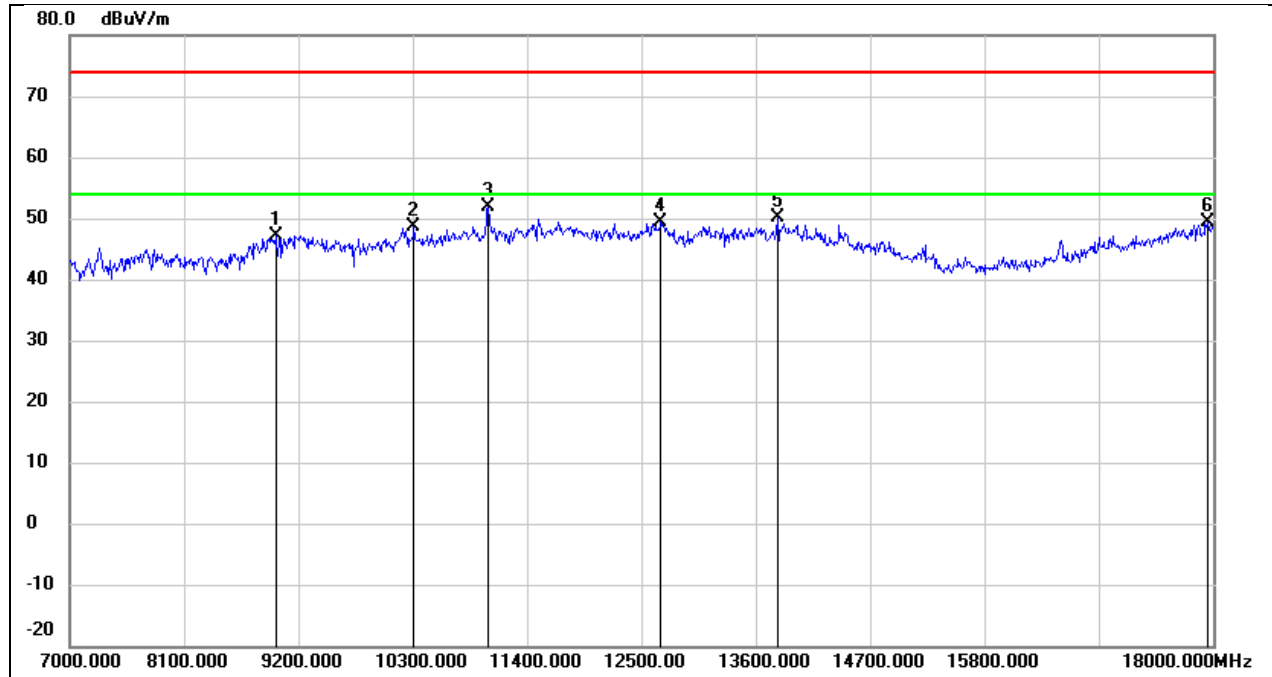


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.00	10.21	47.21	74.00	-26.79	peak
2	10311.000	36.13	12.42	48.55	74.00	-25.45	peak
3	11026.000	37.02	14.82	51.84	74.00	-22.16	peak
4	12687.000	31.28	18.05	49.33	74.00	-24.67	peak
5	13809.000	28.65	21.41	50.06	74.00	-23.94	peak
6	17945.000	23.57	25.75	49.32	74.00	-24.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

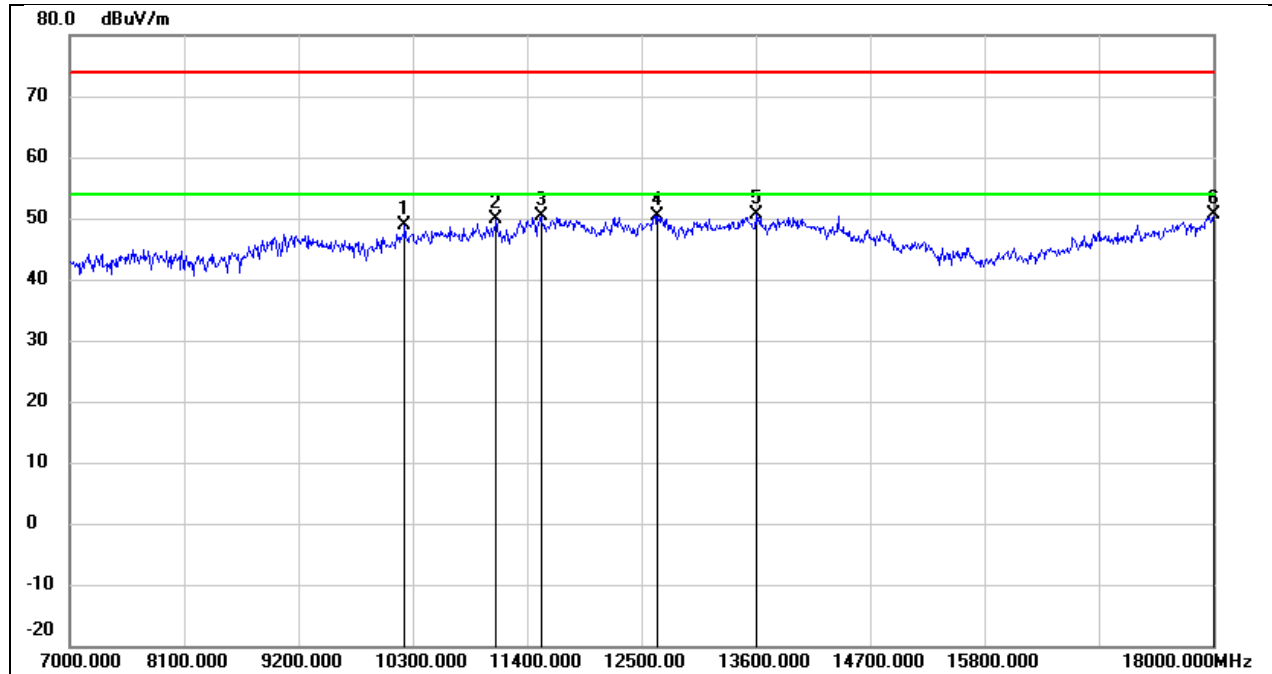


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10223.000	36.67	12.24	48.91	74.00	-25.09	peak
2	11103.000	34.72	15.15	49.87	74.00	-24.13	peak
3	11532.000	33.57	16.83	50.40	74.00	-23.60	peak
4	12654.000	32.44	18.01	50.45	74.00	-23.55	peak
5	13600.000	29.79	20.89	50.68	74.00	-23.32	peak
6	18000.000	24.40	26.12	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3 V

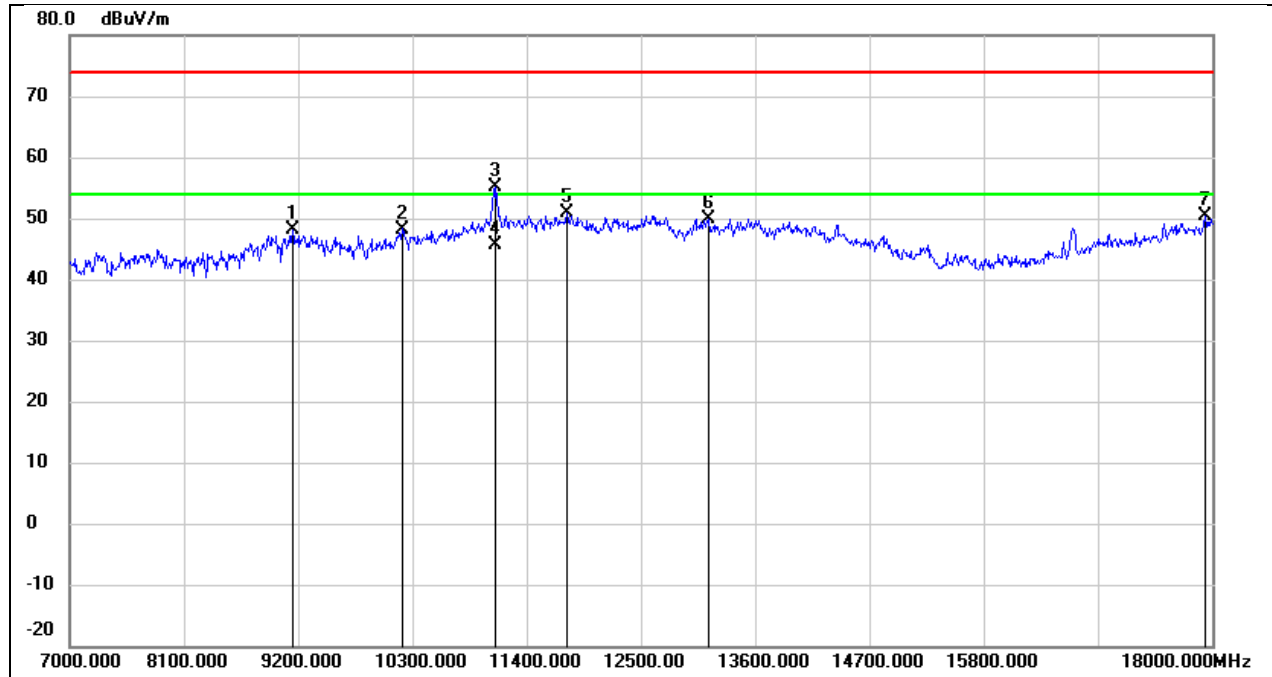


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.72	10.43	48.15	74.00	-25.85	peak
2	10201.000	36.06	12.19	48.25	74.00	-25.75	peak
3	11103.000	39.92	15.15	55.07	74.00	-18.93	peak
4	11103.000	30.58	15.15	45.73	54.00	-8.27	AVG
5	11785.000	33.58	17.30	50.88	74.00	-23.12	peak
6	13149.000	30.76	19.10	49.86	74.00	-24.14	peak
7	17934.000	24.71	25.67	50.38	74.00	-23.62	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

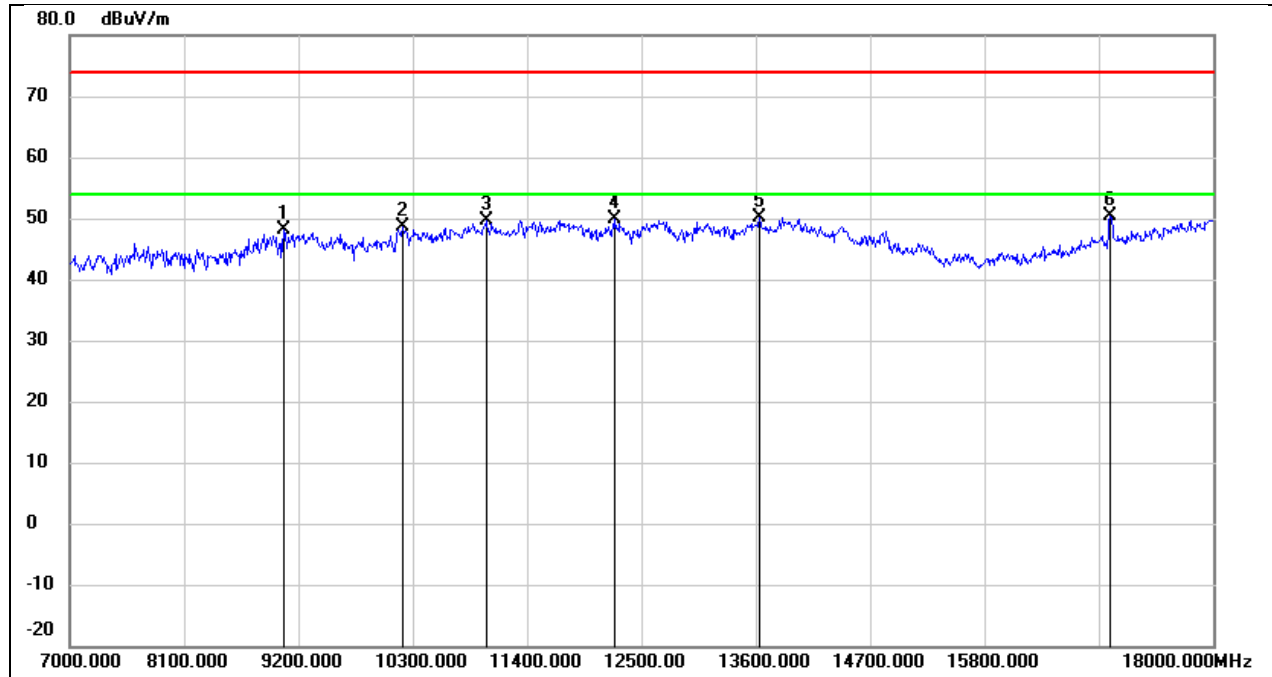


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.80	10.38	48.18	74.00	-25.82	peak
2	10201.000	36.55	12.19	48.74	74.00	-25.26	peak
3	11004.000	34.99	14.74	49.73	74.00	-24.27	peak
4	12247.000	32.03	17.77	49.80	74.00	-24.20	peak
5	13633.000	29.11	20.97	50.08	74.00	-23.92	peak
6	17010.000	29.79	20.65	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3 V

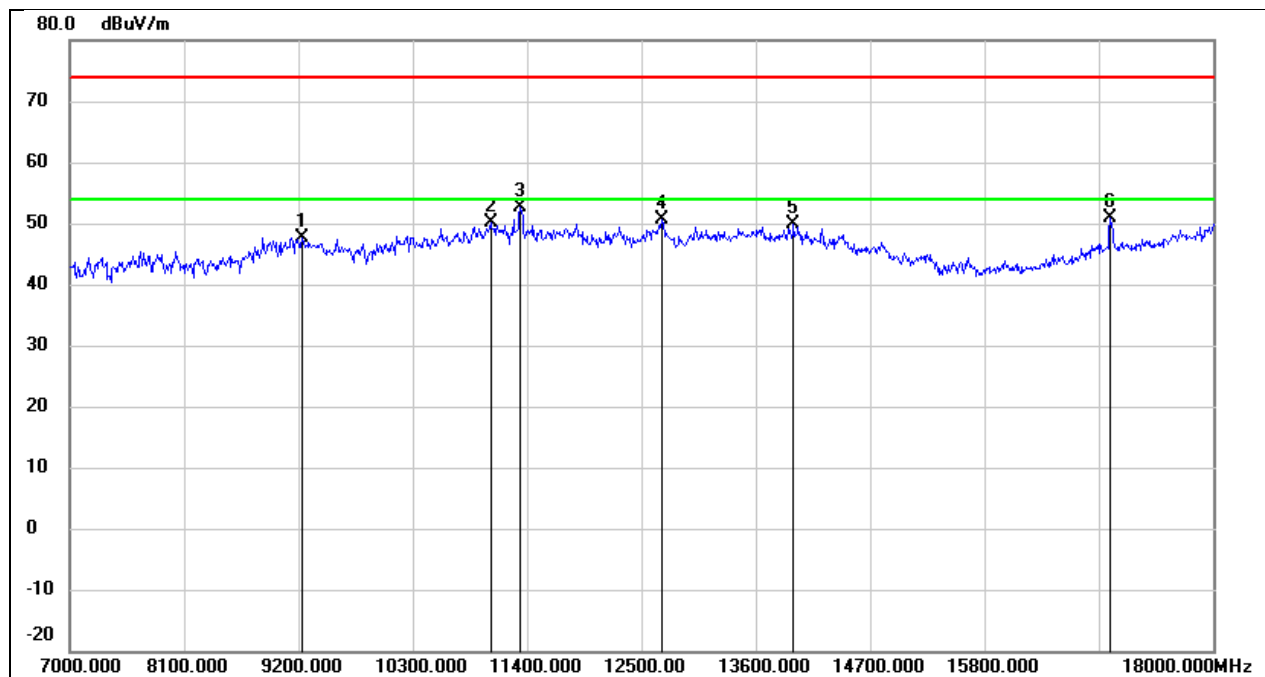


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.18	10.48	47.66	74.00	-26.34	peak
2	11048.000	35.13	14.91	50.04	74.00	-23.96	peak
3	11334.000	36.55	16.09	52.64	74.00	-21.36	peak
4	12698.000	32.52	18.08	50.60	74.00	-23.40	peak
5	13963.000	28.11	21.78	49.89	74.00	-24.11	peak
6	17010.000	30.20	20.65	50.85	74.00	-23.15	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

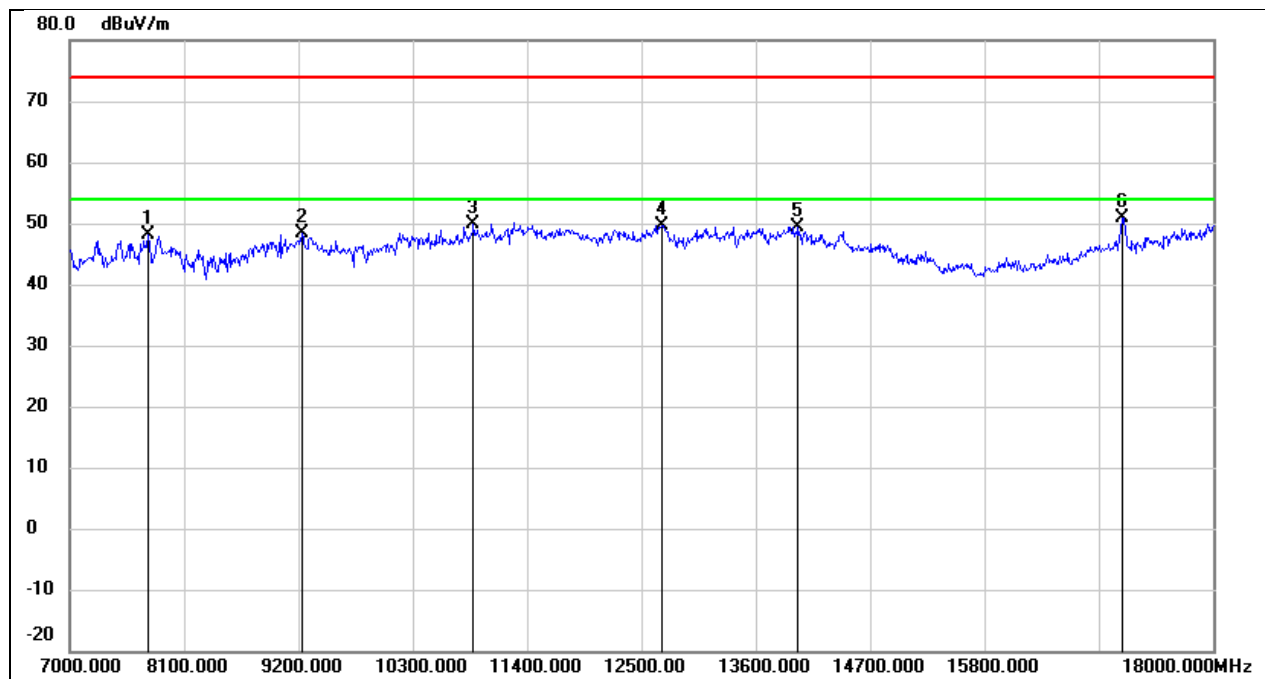


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	41.50	6.66	48.16	74.00	-25.84	peak
2	9233.000	37.97	10.48	48.45	74.00	-25.55	peak
3	10883.000	35.58	14.27	49.85	74.00	-24.15	peak
4	12698.000	31.67	18.08	49.75	74.00	-24.25	peak
5	14007.000	27.63	21.85	49.48	74.00	-24.52	peak
6	17131.000	29.74	21.16	50.90	74.00	-23.10	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3 V

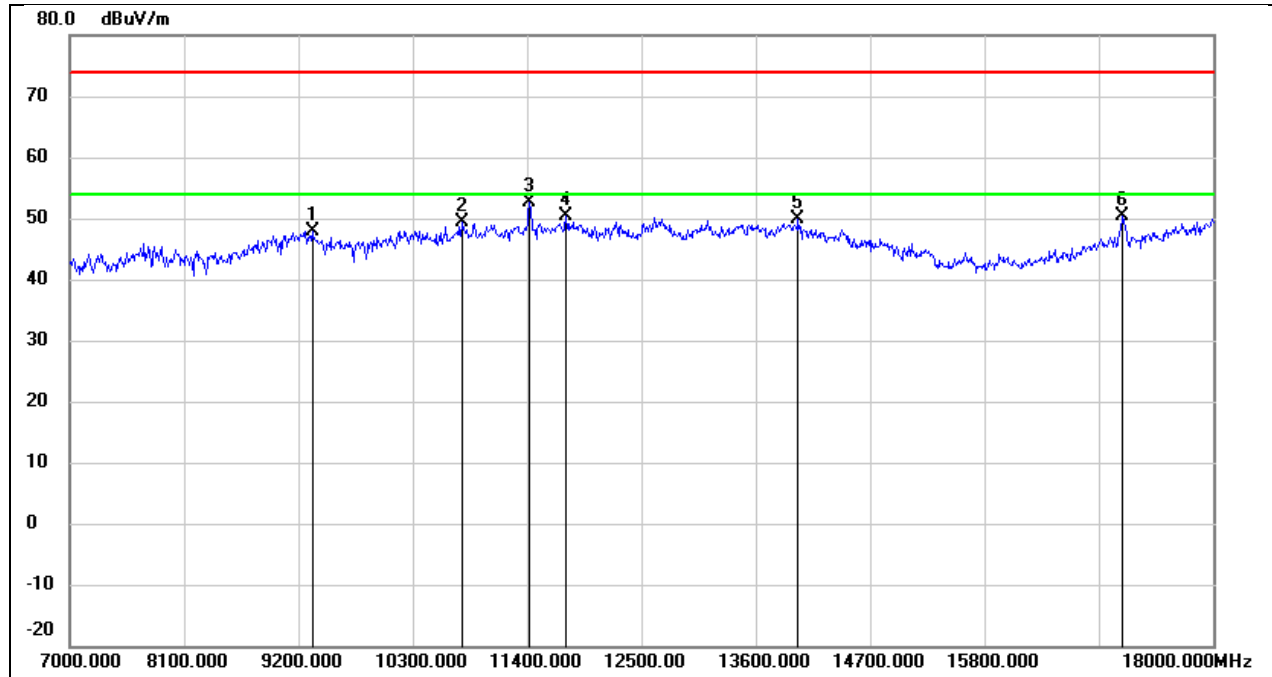


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.40	10.54	47.94	74.00	-26.06	peak
2	10773.000	35.49	13.85	49.34	74.00	-24.66	peak
3	11422.000	36.28	16.46	52.74	74.00	-21.26	peak
4	11774.000	33.16	17.28	50.44	74.00	-23.56	peak
5	14007.000	27.93	21.85	49.78	74.00	-24.22	peak
6	17131.000	29.11	21.16	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

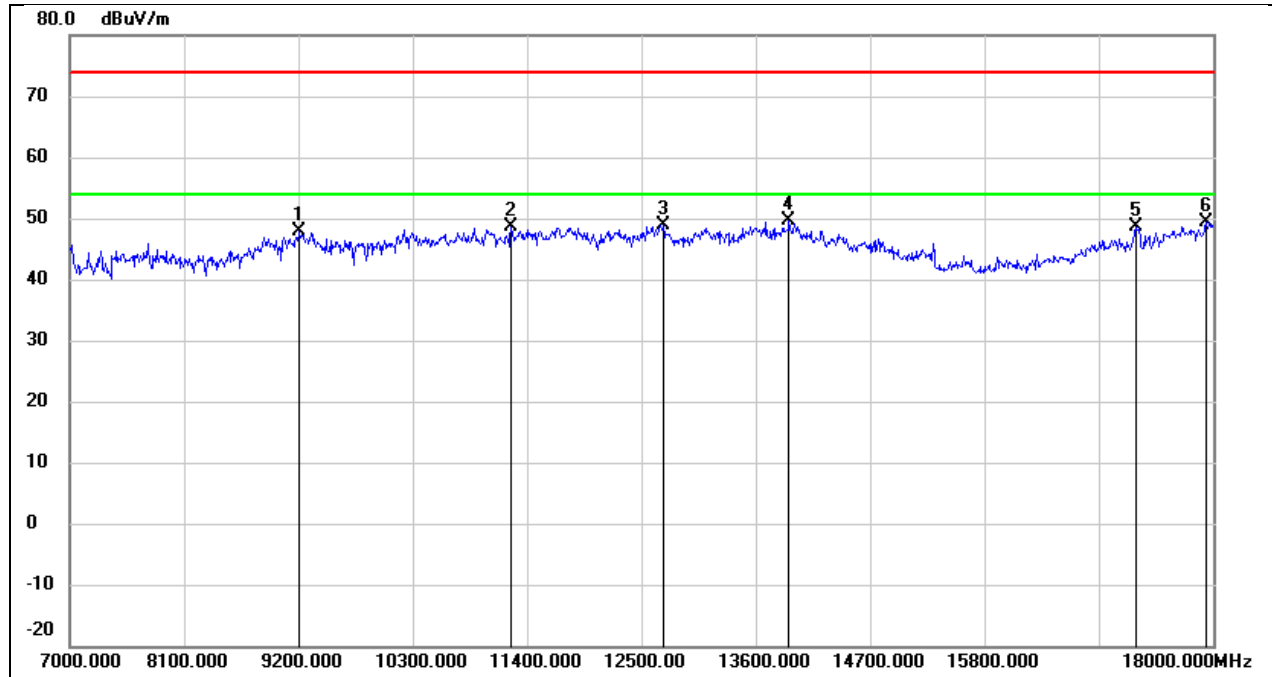


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.40	10.47	47.87	74.00	-26.13	peak
2	11246.000	32.87	15.73	48.60	74.00	-25.40	peak
3	12709.000	30.87	18.09	48.96	74.00	-25.04	peak
4	13919.000	28.01	21.68	49.69	74.00	-24.31	peak
5	17252.000	27.01	21.66	48.67	74.00	-25.33	peak
6	17934.000	23.75	25.67	49.42	74.00	-24.58	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3 V

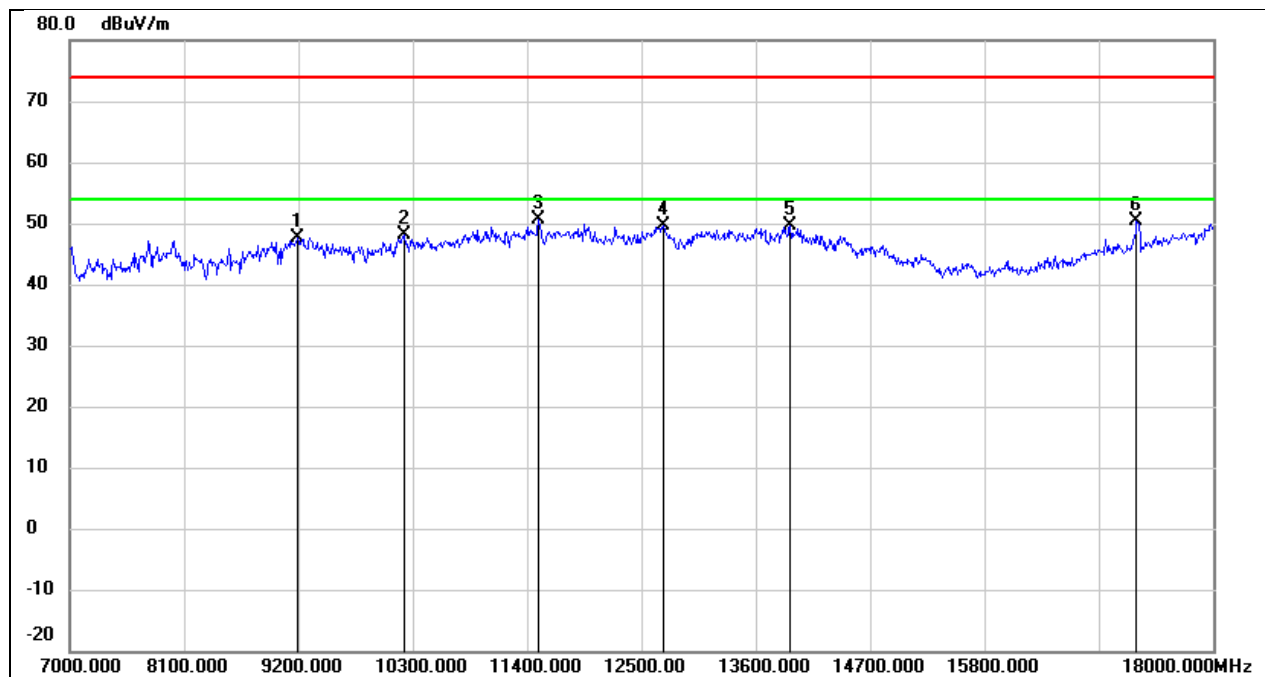


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.17	10.46	47.63	74.00	-26.37	peak
2	10223.000	35.85	12.24	48.09	74.00	-25.91	peak
3	11510.000	33.81	16.79	50.60	74.00	-23.40	peak
4	12709.000	31.63	18.09	49.72	74.00	-24.28	peak
5	13930.000	28.00	21.71	49.71	74.00	-24.29	peak
6	17263.000	28.58	21.71	50.29	74.00	-23.71	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

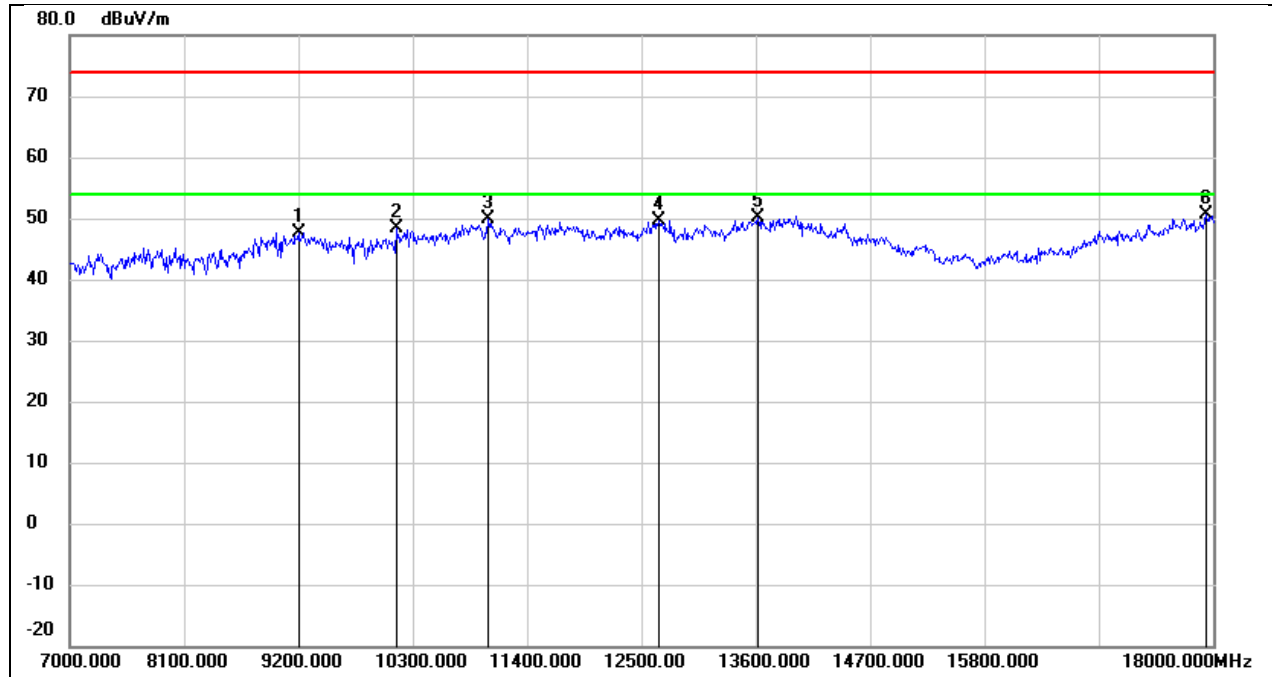


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.29	10.46	47.75	74.00	-26.25	peak
2	10146.000	36.30	12.07	48.37	74.00	-25.63	peak
3	11026.000	34.98	14.82	49.80	74.00	-24.20	peak
4	12665.000	31.60	18.04	49.64	74.00	-24.36	peak
5	13622.000	29.12	20.95	50.07	74.00	-23.93	peak
6	17934.000	24.95	25.67	50.62	74.00	-23.38	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3 V

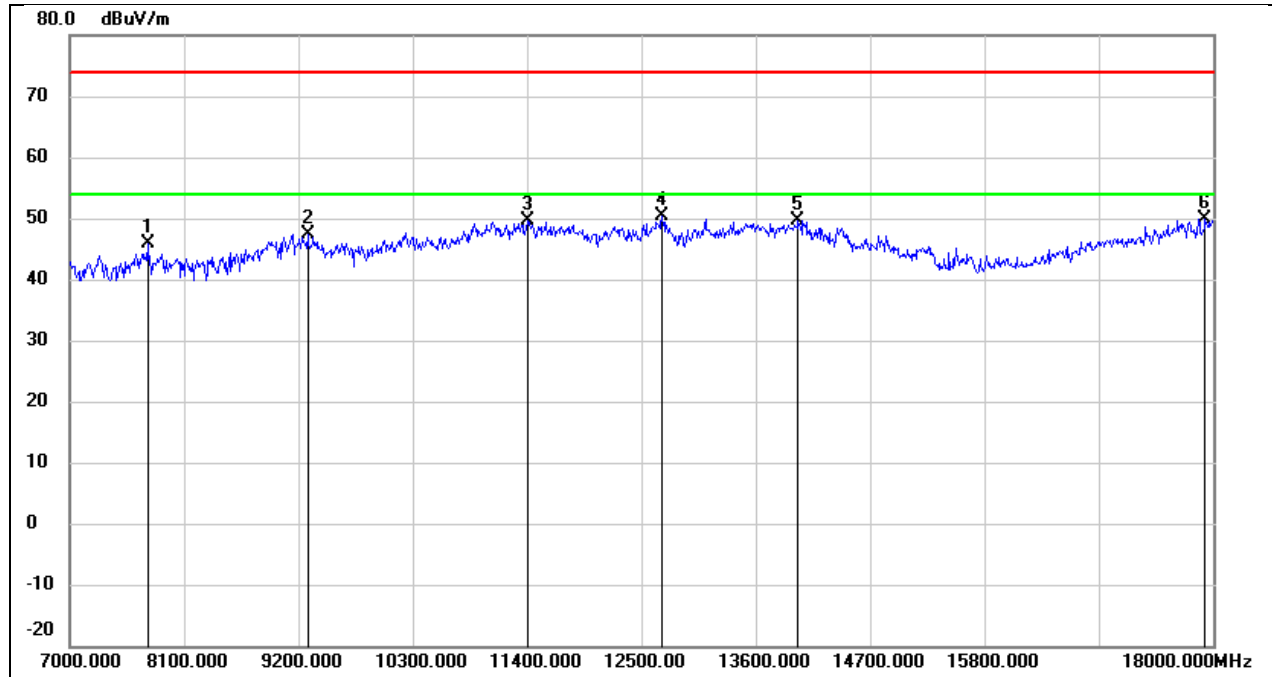


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.14	6.66	45.80	74.00	-28.20	peak
2	9288.000	36.84	10.52	47.36	74.00	-26.64	peak
3	11411.000	33.18	16.41	49.59	74.00	-24.41	peak
4	12698.000	32.19	18.08	50.27	74.00	-23.73	peak
5	14007.000	27.76	21.85	49.61	74.00	-24.39	peak
6	17923.000	24.31	25.60	49.91	74.00	-24.09	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

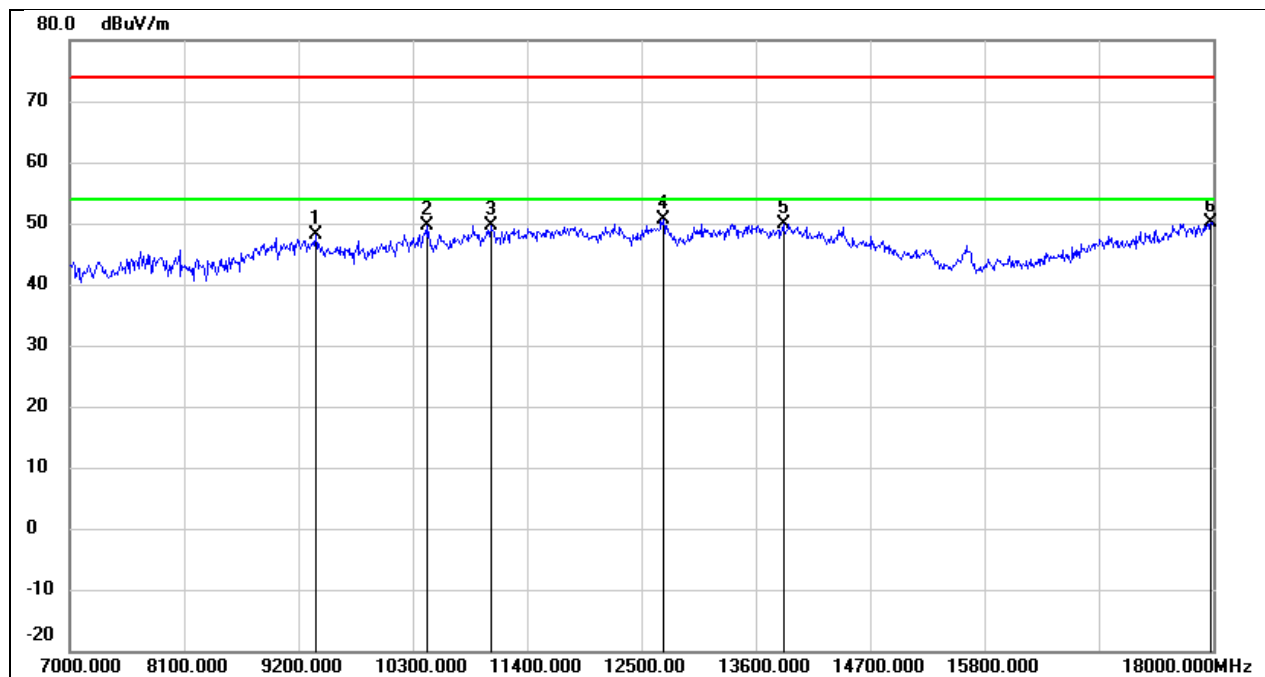


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	37.53	10.57	48.10	74.00	-25.90	peak
2	10432.000	36.96	12.67	49.63	74.00	-24.37	peak
3	11048.000	34.74	14.91	49.65	74.00	-24.35	peak
4	12709.000	32.60	18.09	50.69	74.00	-23.31	peak
5	13864.000	28.46	21.53	49.99	74.00	-24.01	peak
6	17978.000	24.16	25.97	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3 V

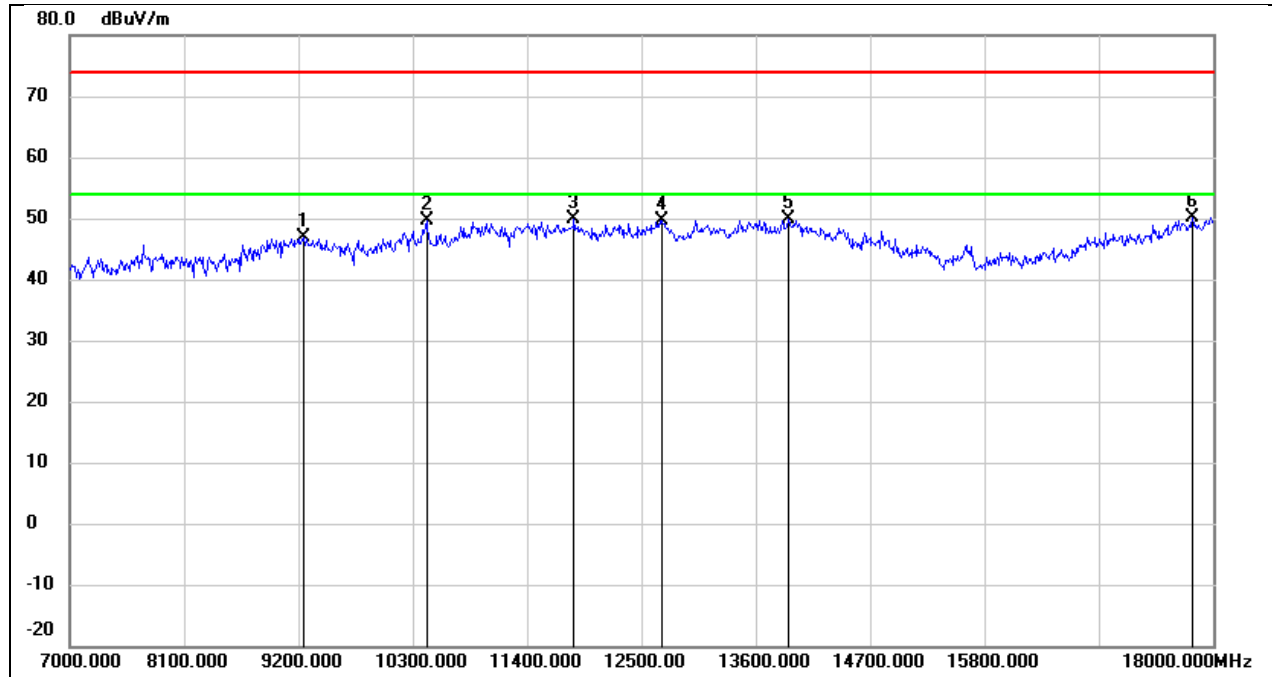


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.36	10.49	46.85	74.00	-27.15	peak
2	10432.000	36.84	12.67	49.51	74.00	-24.49	peak
3	11851.000	32.39	17.43	49.82	74.00	-24.18	peak
4	12698.000	31.58	18.08	49.66	74.00	-24.34	peak
5	13919.000	28.17	21.68	49.85	74.00	-24.15	peak
6	17802.000	25.39	24.76	50.15	74.00	-23.85	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

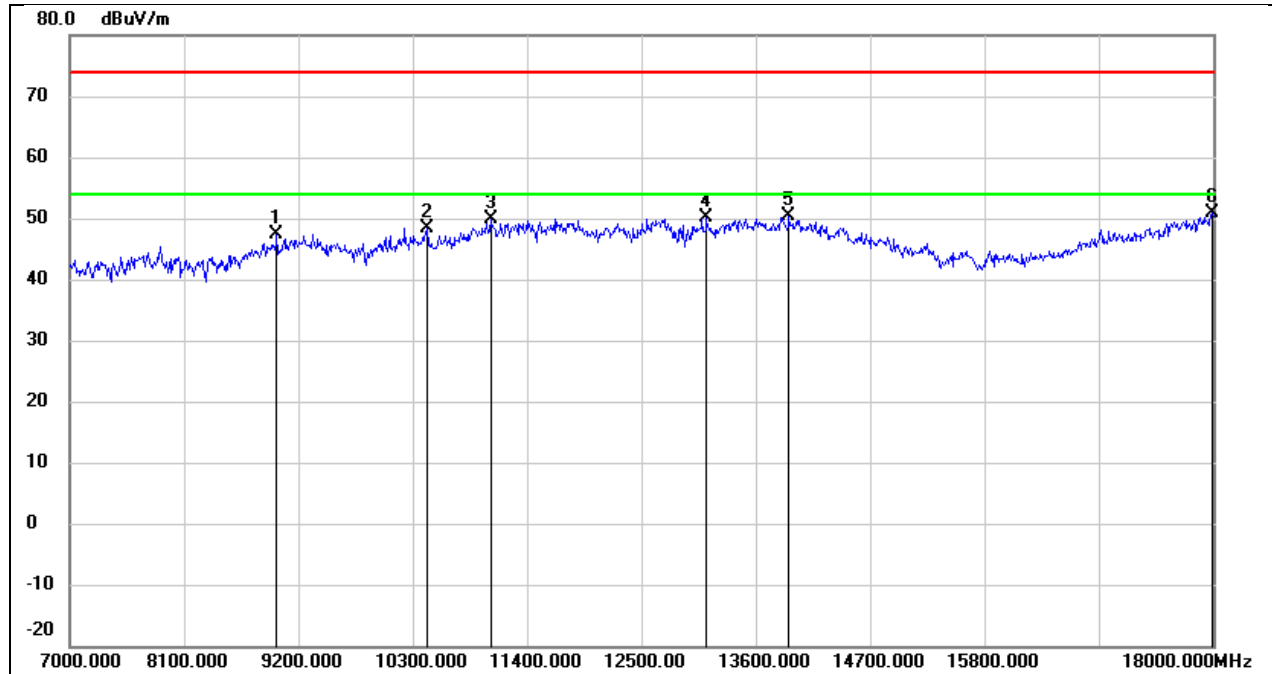


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.14	10.28	47.42	74.00	-26.58	peak
2	10443.000	35.78	12.70	48.48	74.00	-25.52	peak
3	11048.000	35.08	14.91	49.99	74.00	-24.01	peak
4	13127.000	31.18	19.01	50.19	74.00	-23.81	peak
5	13919.000	28.59	21.68	50.27	74.00	-23.73	peak
6	17989.000	24.73	26.04	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3 V

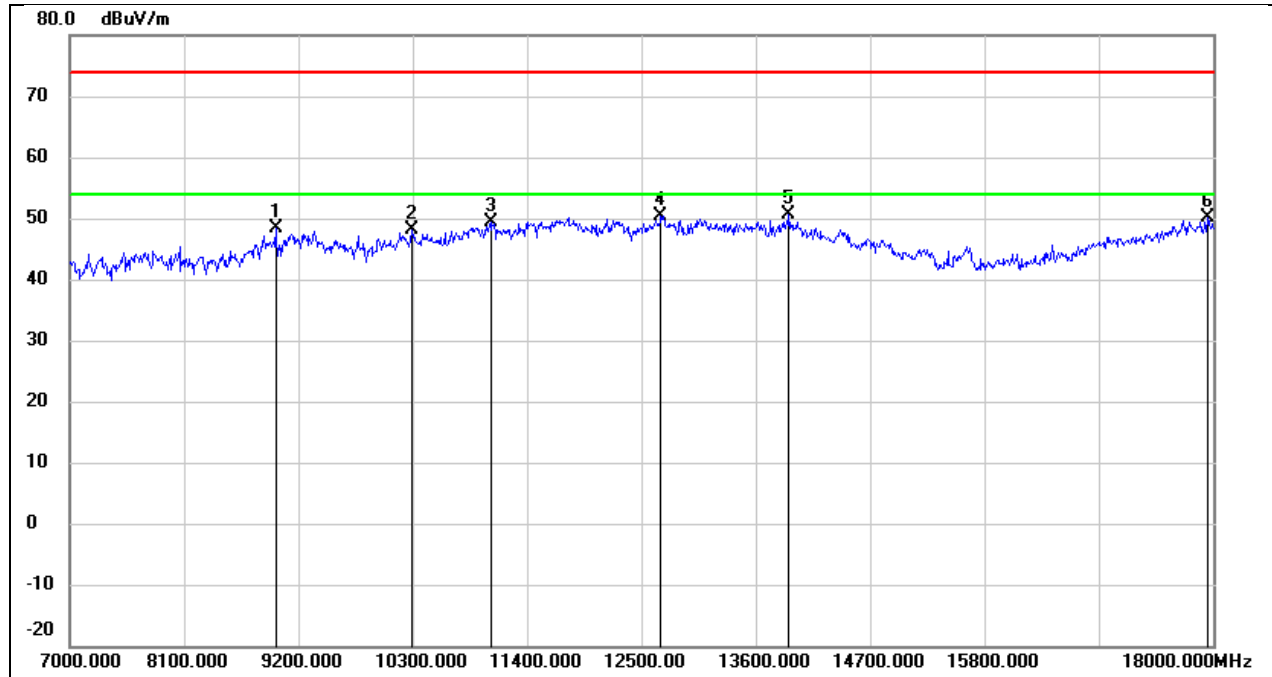


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.16	10.21	48.37	74.00	-25.63	peak
2	10289.000	35.81	12.38	48.19	74.00	-25.81	peak
3	11059.000	34.42	14.96	49.38	74.00	-24.62	peak
4	12687.000	32.45	18.05	50.50	74.00	-23.50	peak
5	13919.000	28.92	21.68	50.60	74.00	-23.40	peak
6	17945.000	24.37	25.75	50.12	74.00	-23.88	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

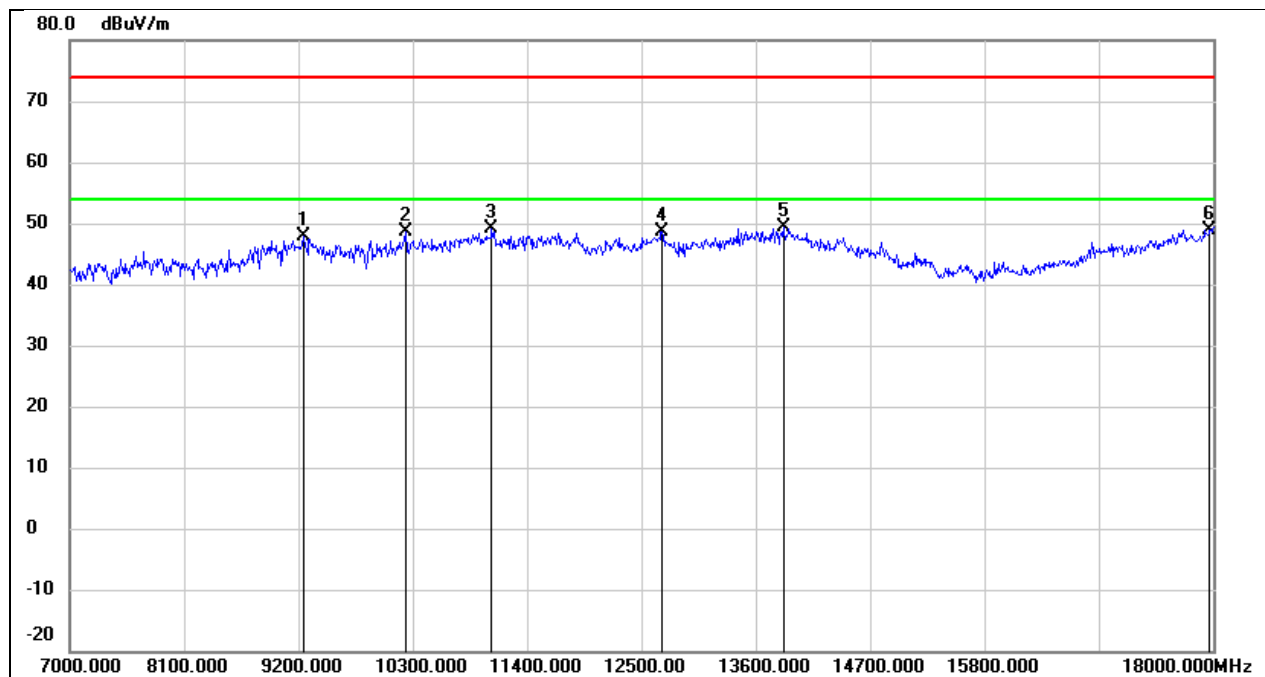


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.25	10.51	47.76	74.00	-26.24	peak
2	10234.000	36.30	12.26	48.56	74.00	-25.44	peak
3	11059.000	34.07	14.96	49.03	74.00	-24.97	peak
4	12698.000	30.45	18.08	48.53	74.00	-25.47	peak
5	13864.000	27.77	21.53	49.30	74.00	-24.70	peak
6	17967.000	23.04	25.89	48.93	74.00	-25.07	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3 V

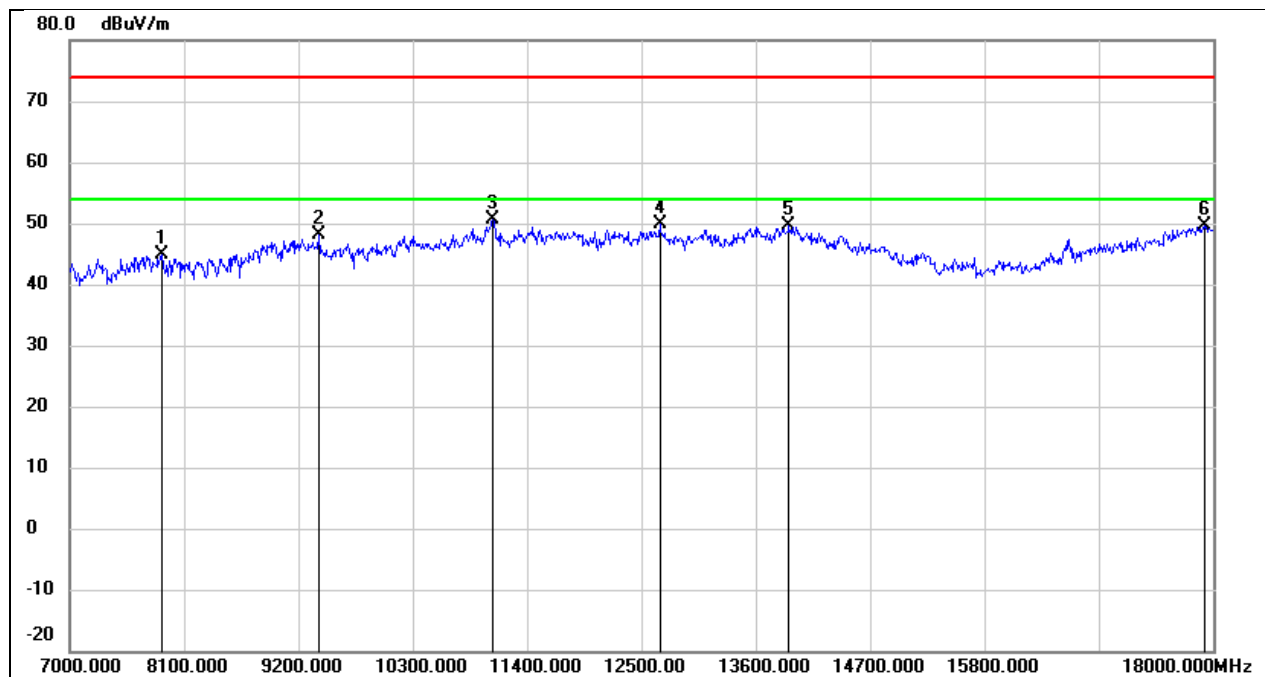


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	38.46	6.54	45.00	74.00	-29.00	peak
2	9398.000	37.48	10.59	48.07	74.00	-25.93	peak
3	11070.000	35.52	15.01	50.53	74.00	-23.47	peak
4	12676.000	31.89	18.05	49.94	74.00	-24.06	peak
5	13919.000	28.00	21.68	49.68	74.00	-24.32	peak
6	17912.000	24.00	25.52	49.52	74.00	-24.48	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

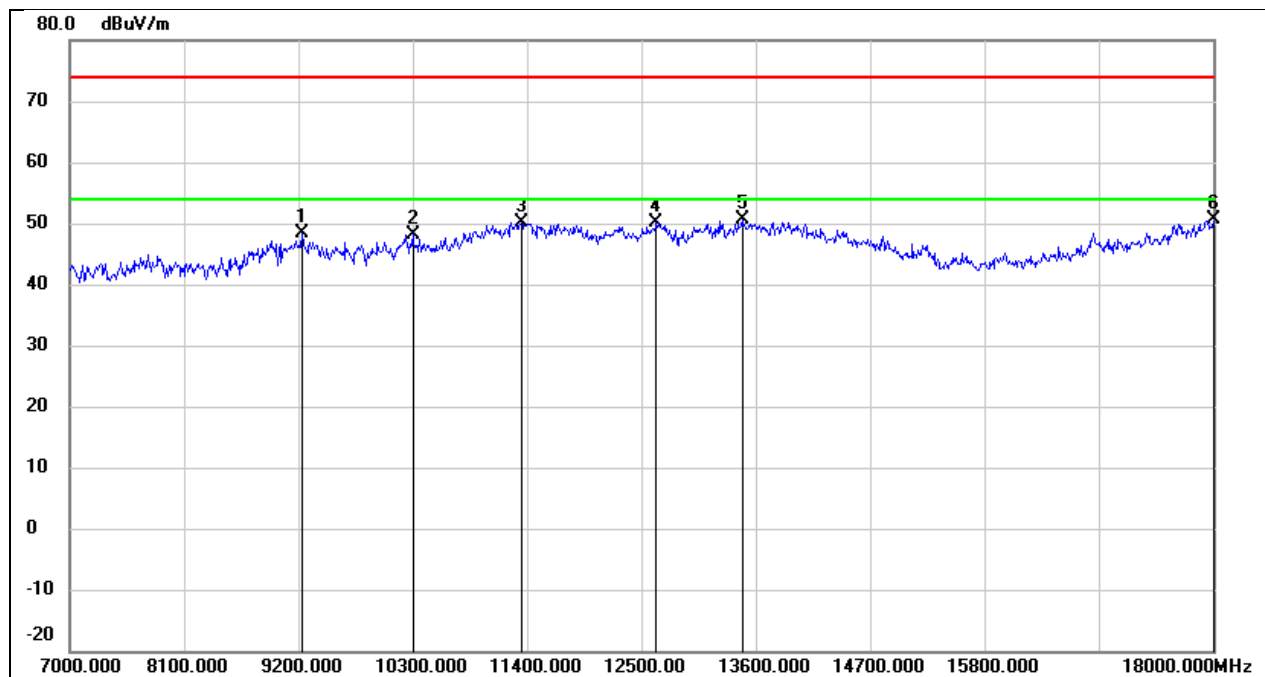


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.90	10.48	48.38	74.00	-25.62	peak
2	10300.000	35.85	12.40	48.25	74.00	-25.75	peak
3	11345.000	34.07	16.14	50.21	74.00	-23.79	peak
4	12643.000	32.16	18.01	50.17	74.00	-23.83	peak
5	13468.000	30.24	20.50	50.74	74.00	-23.26	peak
6	18000.000	24.40	26.12	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3 V

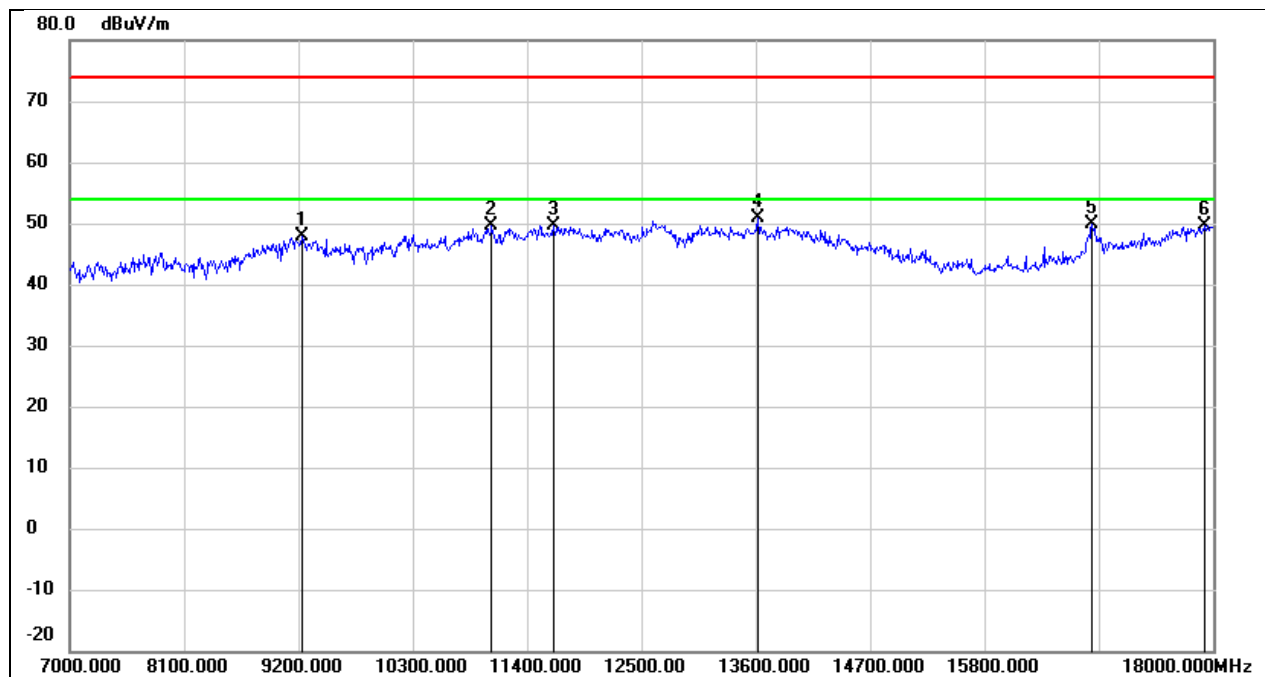


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.52	10.48	48.00	74.00	-26.00	peak
2	11059.000	34.75	14.96	49.71	74.00	-24.29	peak
3	11653.000	32.68	17.05	49.73	74.00	-24.27	peak
4	13622.000	30.01	20.95	50.96	74.00	-23.04	peak
5	16834.000	29.96	19.86	49.82	74.00	-24.18	peak
6	17923.000	24.15	25.60	49.75	74.00	-24.25	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

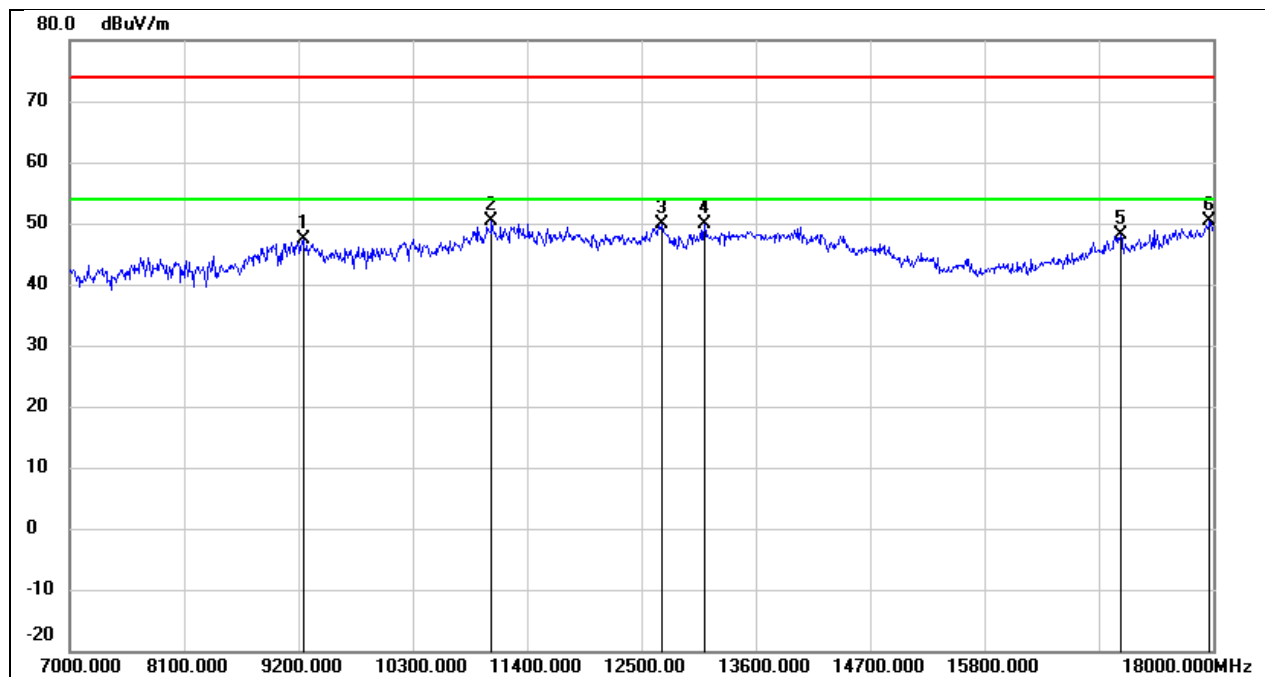


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.86	10.49	47.35	74.00	-26.65	peak
2	11059.000	35.51	14.96	50.47	74.00	-23.53	peak
3	12698.000	31.77	18.08	49.85	74.00	-24.15	peak
4	13105.000	31.02	18.91	49.93	74.00	-24.07	peak
5	17109.000	26.98	21.07	48.05	74.00	-25.95	peak
6	17967.000	24.58	25.89	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3 V

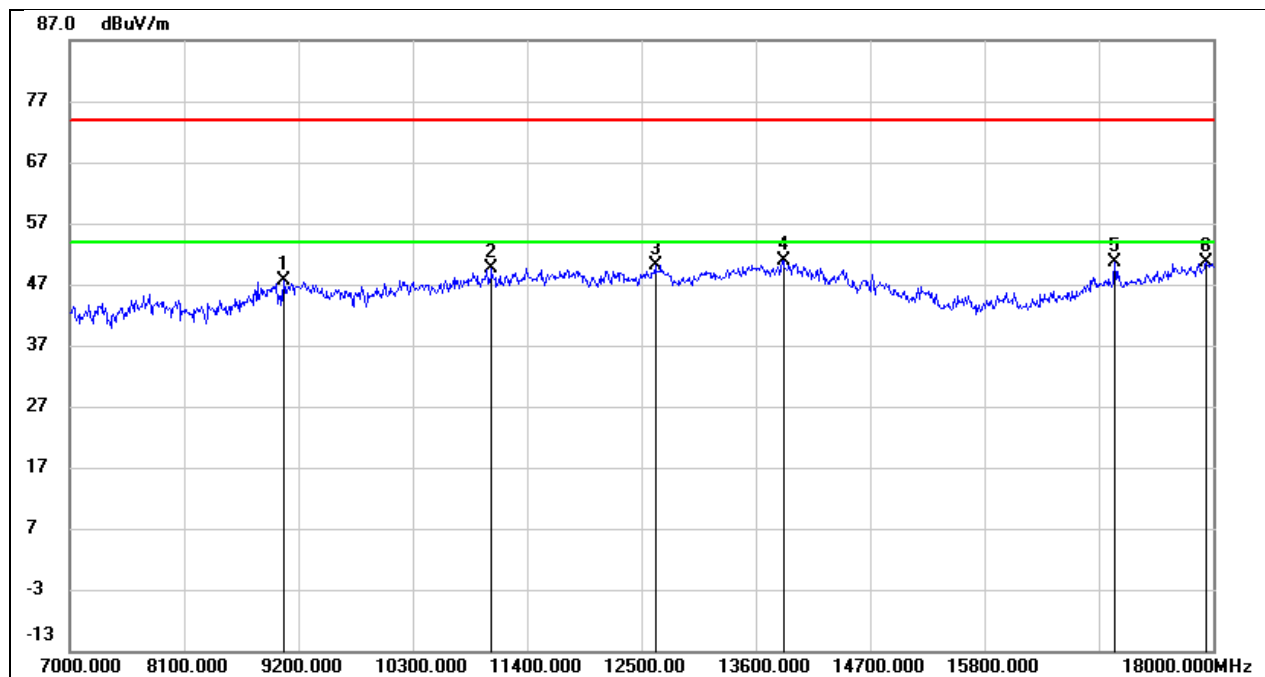


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.26	10.38	47.64	74.00	-26.36	peak
2	11059.000	34.75	14.96	49.71	74.00	-24.29	peak
3	12632.000	32.09	17.99	50.08	74.00	-23.92	peak
4	13864.000	29.45	21.53	50.98	74.00	-23.02	peak
5	17054.000	29.92	20.83	50.75	74.00	-23.25	peak
6	17934.000	24.89	25.67	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

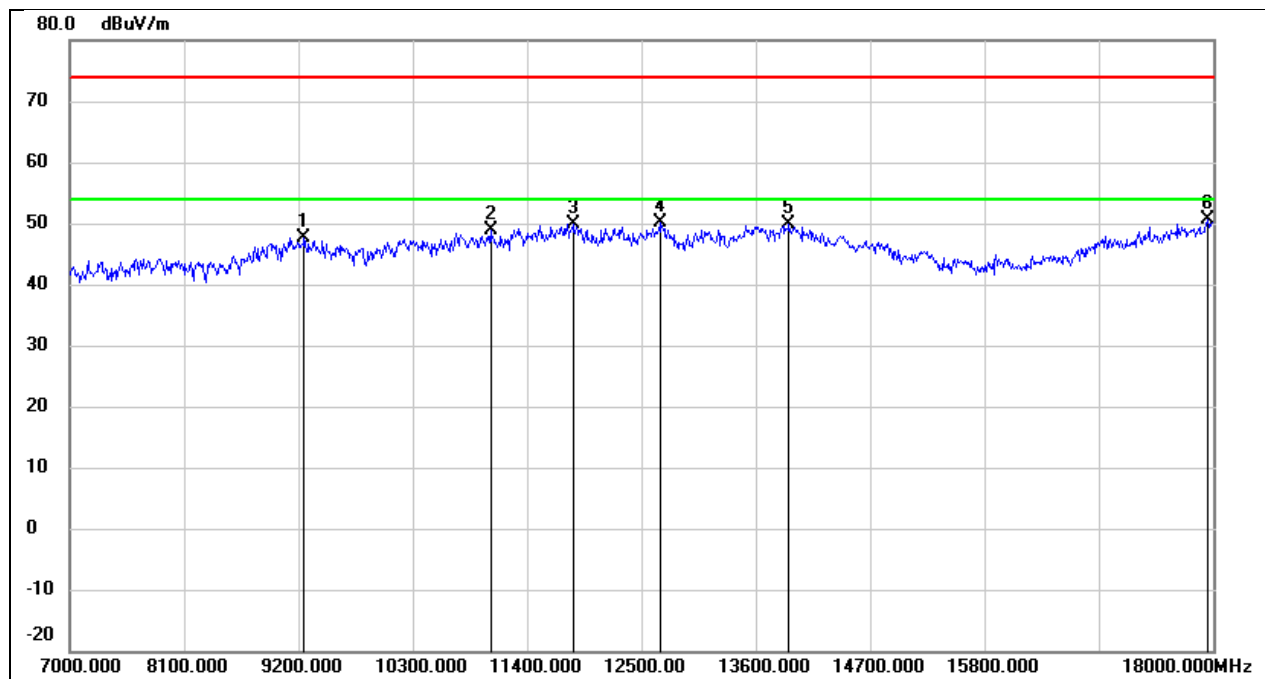

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.04	10.51	47.55	74.00	-26.45	peak
2	11048.000	33.95	14.91	48.86	74.00	-25.14	peak
3	11840.000	32.42	17.40	49.82	74.00	-24.18	peak
4	12676.000	32.08	18.05	50.13	74.00	-23.87	peak
5	13919.000	28.24	21.68	49.92	74.00	-24.08	peak
6	17945.000	24.84	25.75	50.59	74.00	-23.41	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3 V

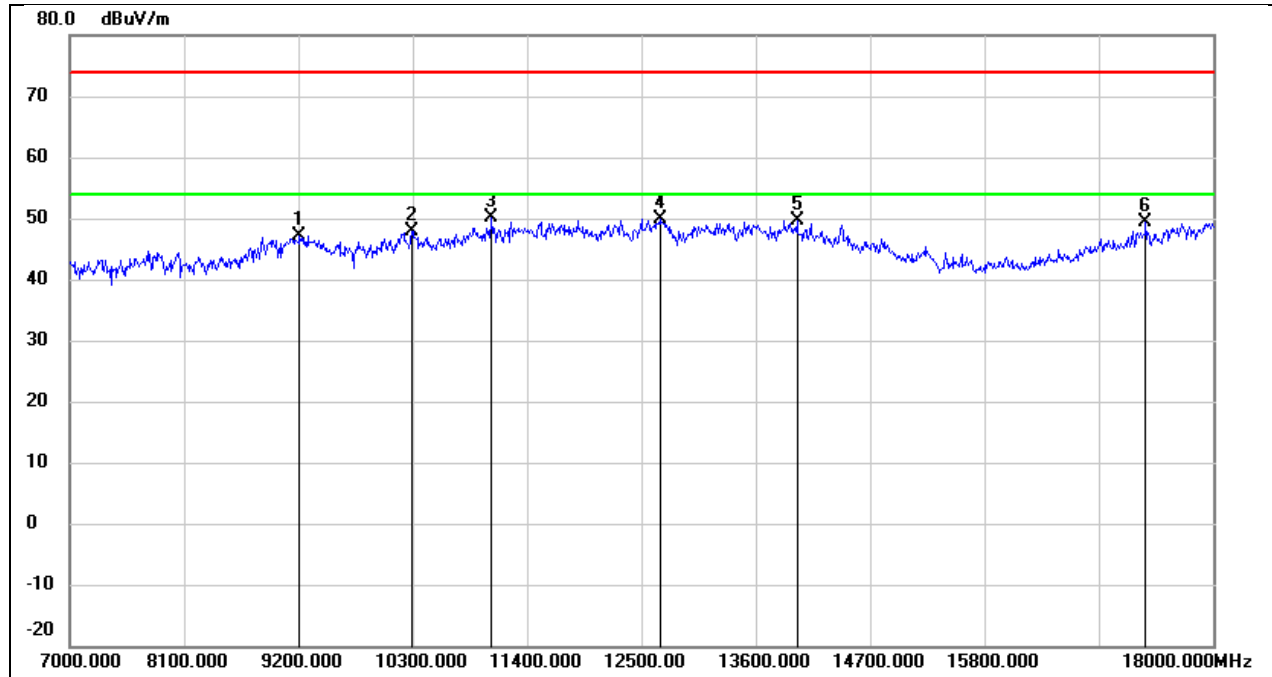

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	36.74	10.47	47.21	74.00	-26.79	peak
2	10289.000	35.60	12.38	47.98	74.00	-26.02	peak
3	11059.000	35.10	14.96	50.06	74.00	-23.94	peak
4	12676.000	31.93	18.05	49.98	74.00	-24.02	peak
5	13996.000	27.88	21.87	49.75	74.00	-24.25	peak
6	17351.000	27.21	22.07	49.28	74.00	-24.72	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

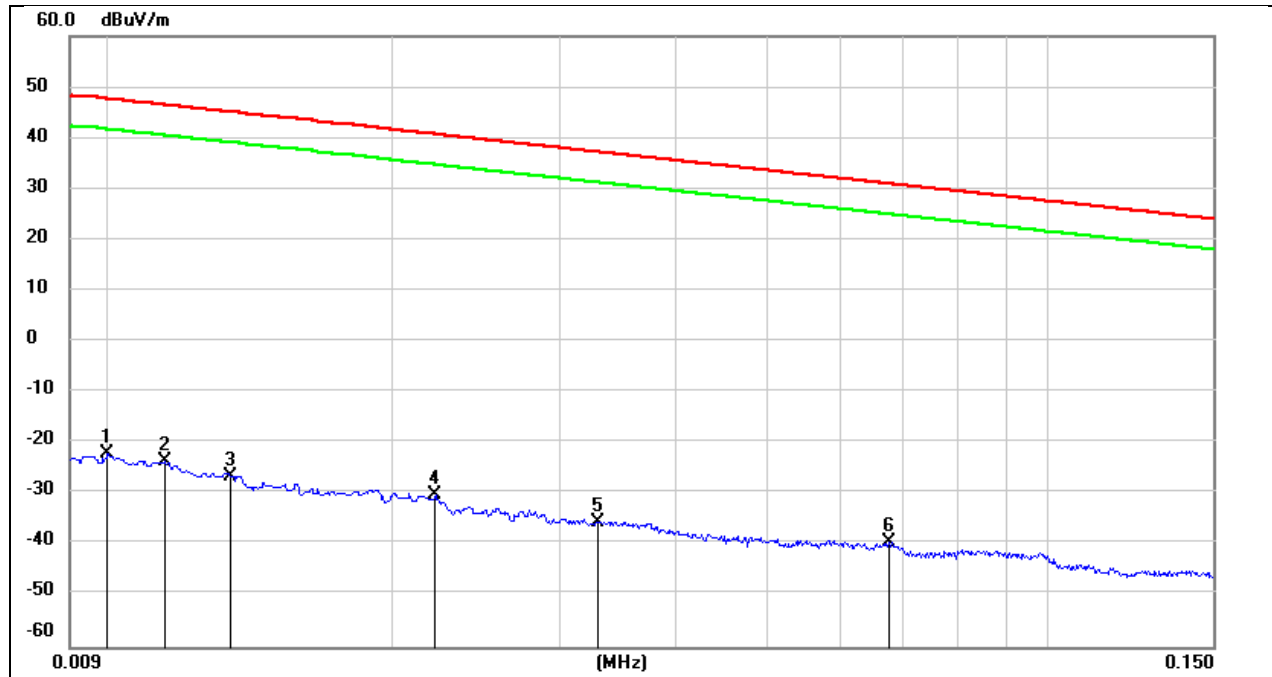


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	79.22	-101.40	-22.18	47.60	-73.68	-3.90	-69.78	peak
2	0.0114	77.88	-101.40	-23.52	46.46	-75.02	-5.04	-69.98	peak
3	0.0134	74.84	-101.39	-26.55	45.06	-78.05	-6.44	-71.61	peak
4	0.0221	71.13	-101.35	-30.22	40.71	-81.72	-10.79	-70.93	peak
5	0.0330	65.98	-101.40	-35.42	37.23	-86.92	-14.27	-72.65	peak
6	0.0675	62.14	-101.56	-39.42	31.02	-90.92	-20.48	-70.44	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

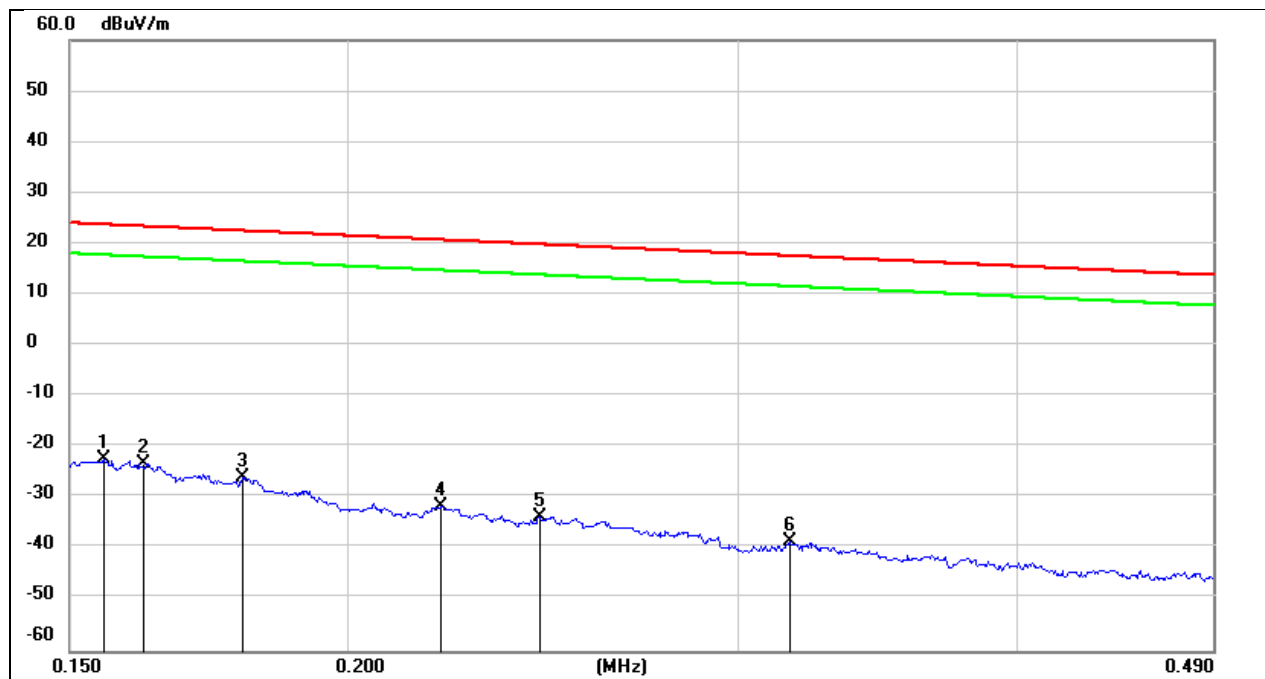

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	79.27	-101.65	-22.38	23.77	-73.88	-27.73	-46.15	peak
2	0.1621	78.42	-101.65	-23.23	23.41	-74.73	-28.09	-46.64	peak
3	0.1794	75.77	-101.68	-25.91	22.53	-77.41	-28.97	-48.44	peak
4	0.2204	70.16	-101.75	-31.59	20.74	-83.09	-30.76	-52.33	peak
5	0.2442	68.03	-101.79	-33.76	19.85	-85.26	-31.65	-53.61	peak
6	0.3163	63.20	-101.87	-38.67	17.60	-90.17	-33.90	-56.27	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

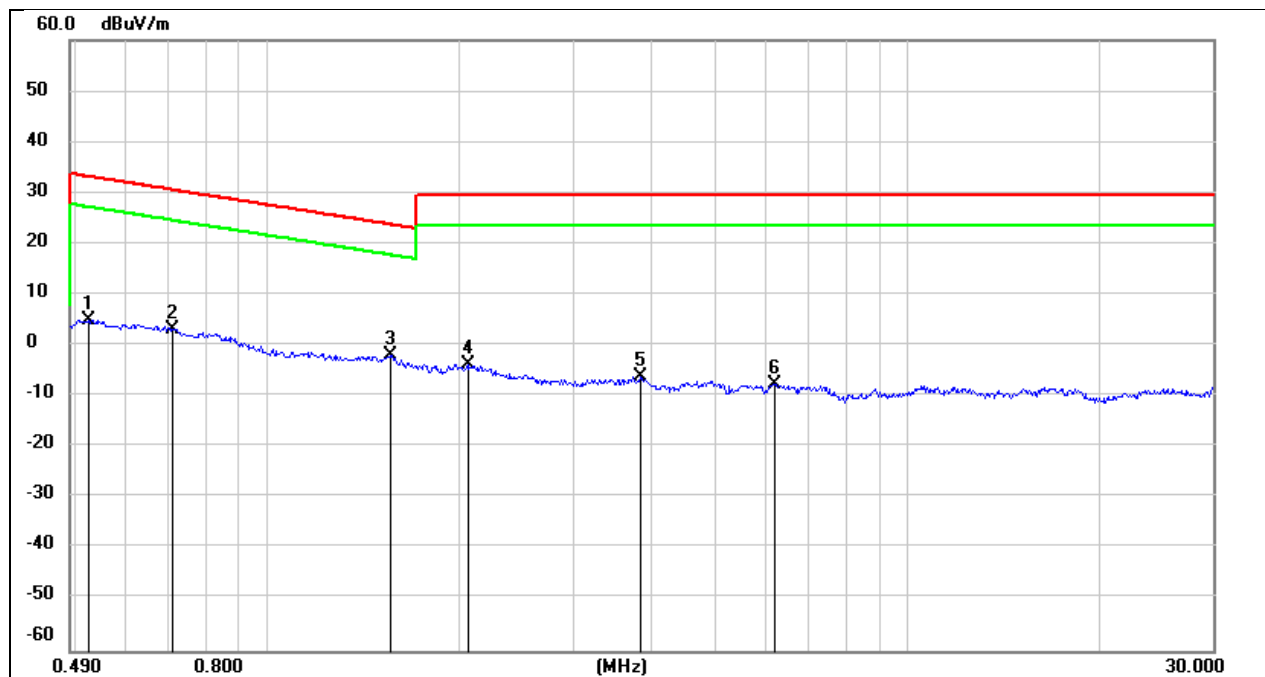

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5252	67.06	-62.07	4.99	33.20	-46.51	-18.30	-28.21	peak
2	0.7096	65.36	-62.12	3.24	30.58	-48.26	-20.92	-27.34	peak
3	1.5564	60.18	-62.02	-1.84	23.76	-53.34	-27.74	-25.60	peak
4	2.0539	58.20	-61.81	-3.61	29.54	-55.11	-21.96	-33.15	peak
5	3.8246	55.20	-61.38	-6.18	29.54	-57.68	-21.96	-35.72	peak
6	6.2149	53.70	-61.32	-7.62	29.54	-59.12	-21.96	-37.16	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

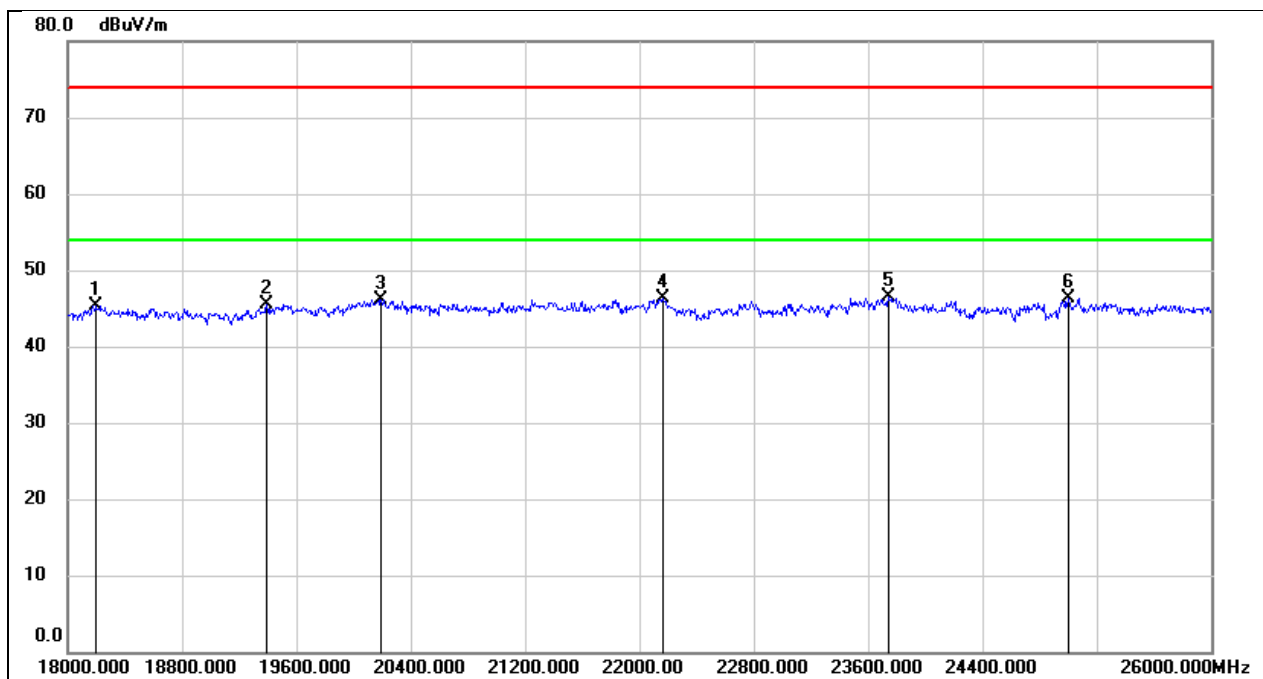

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18200.000	50.79	-5.52	45.27	74.00	-28.73	peak
2	19392.000	51.12	-5.57	45.55	74.00	-28.45	peak
3	20192.000	51.73	-5.57	46.16	74.00	-27.84	peak
4	22160.000	50.58	-4.31	46.27	74.00	-27.73	peak
5	23744.000	49.65	-3.20	46.45	74.00	-27.55	peak
6	25000.000	48.36	-2.10	46.26	74.00	-27.74	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

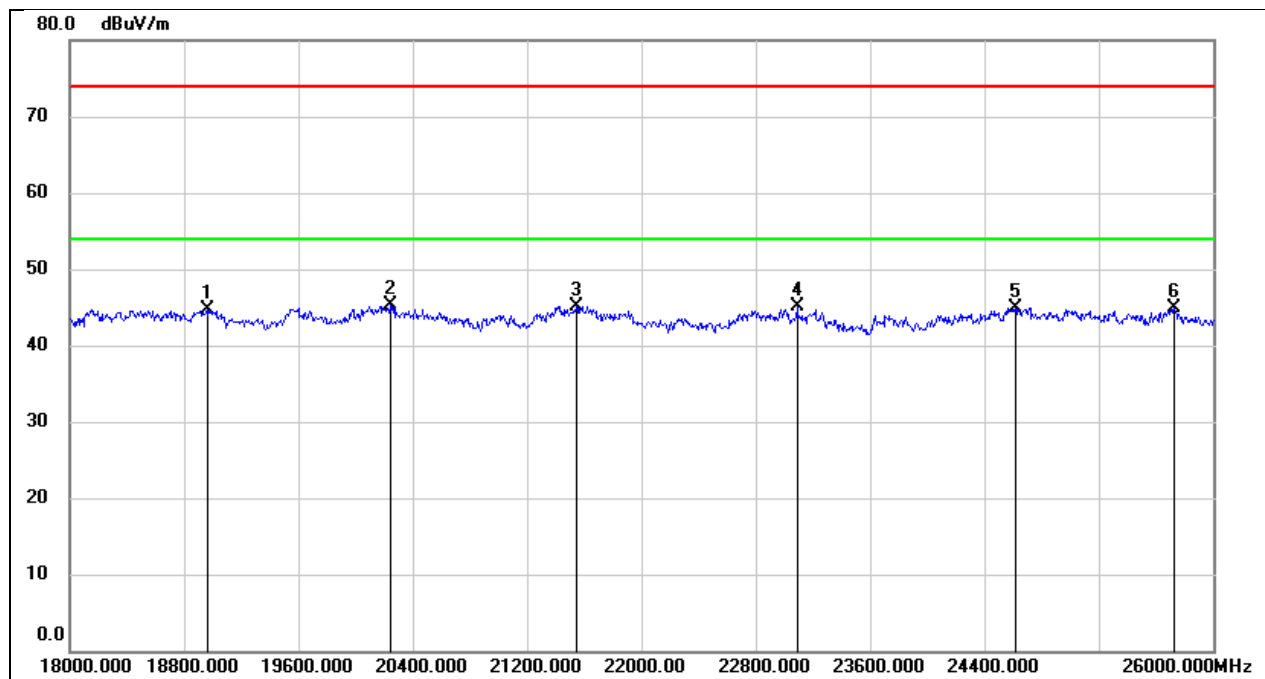

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18960.000	50.01	-5.25	44.76	74.00	-29.24	peak
2	20240.000	50.82	-5.61	45.21	74.00	-28.79	peak
3	21544.000	49.76	-4.63	45.13	74.00	-28.87	peak
4	23088.000	48.52	-3.41	45.11	74.00	-28.89	peak
5	24616.000	47.30	-2.33	44.97	74.00	-29.03	peak
6	25728.000	45.61	-0.72	44.89	74.00	-29.11	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

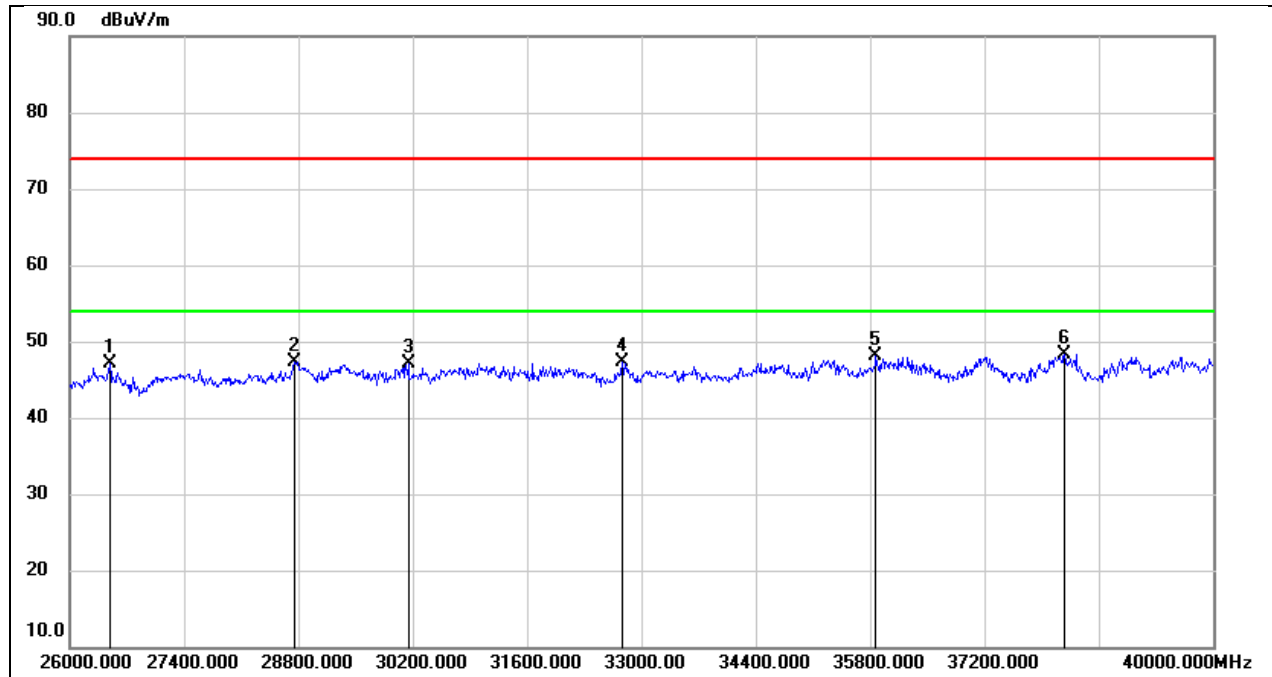

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	51.79	-4.74	47.05	74.00	-26.95	peak
2	28744.000	47.86	-0.56	47.30	74.00	-26.70	peak
3	30144.000	48.46	-1.30	47.16	74.00	-26.84	peak
4	32762.000	48.45	-1.21	47.24	74.00	-26.76	peak
5	35870.000	44.33	3.75	48.08	74.00	-25.92	peak
6	38180.000	44.64	3.69	48.33	74.00	-25.67	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

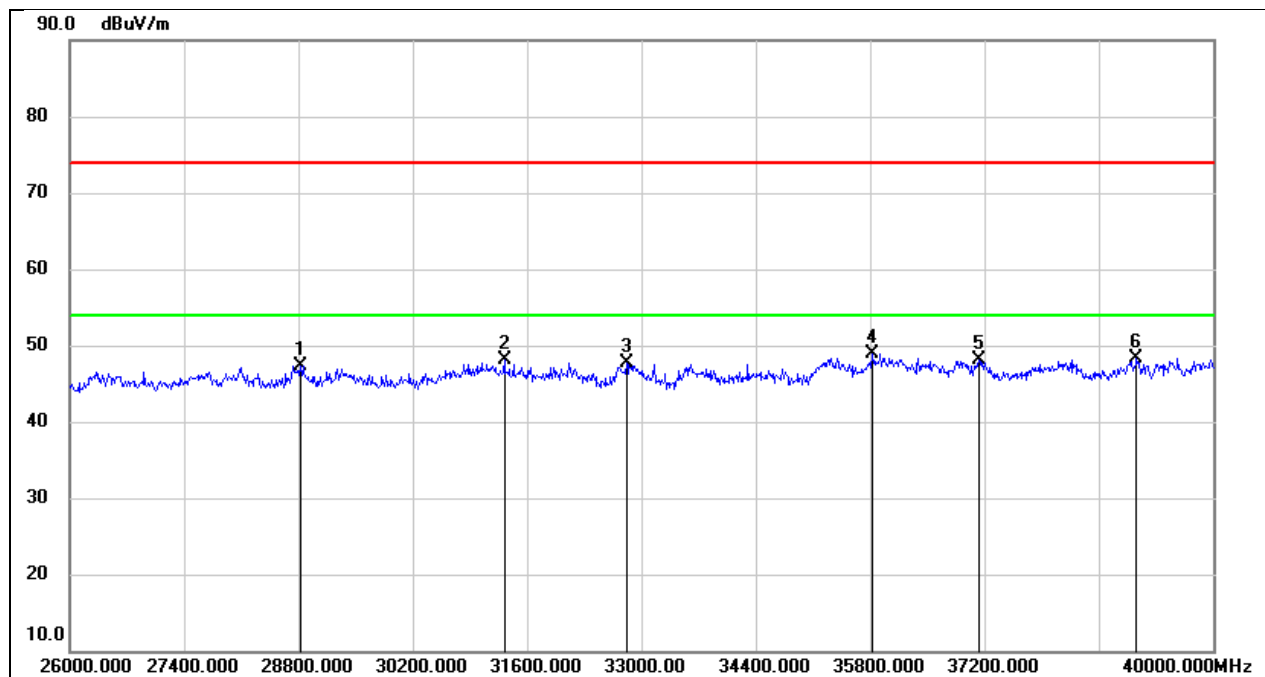

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28828.000	48.13	-0.79	47.34	74.00	-26.66	peak
2	31320.000	49.11	-0.93	48.18	74.00	-25.82	peak
3	32818.000	48.81	-1.08	47.73	74.00	-26.27	peak
4	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
5	37130.000	45.03	3.17	48.20	74.00	-25.80	peak
6	39062.000	43.98	4.30	48.28	74.00	-25.72	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

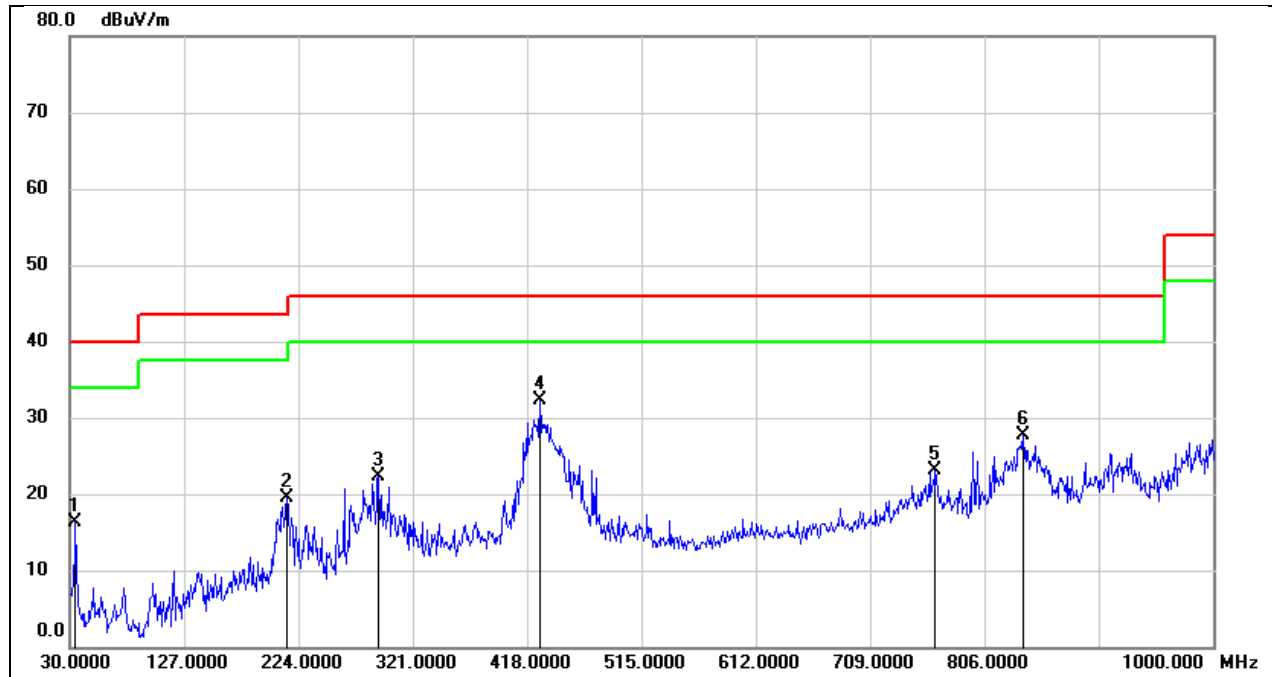

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	35.33	-18.99	16.34	40.00	-23.66	QP
2	214.3000	36.73	-17.23	19.50	43.50	-24.00	QP
3	291.9000	38.04	-15.76	22.28	46.00	-23.72	QP
4	428.6700	44.41	-12.20	32.21	46.00	-13.79	QP
5	764.2900	29.93	-6.88	23.05	46.00	-22.95	QP
6	838.9800	33.94	-6.33	27.61	46.00	-18.39	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

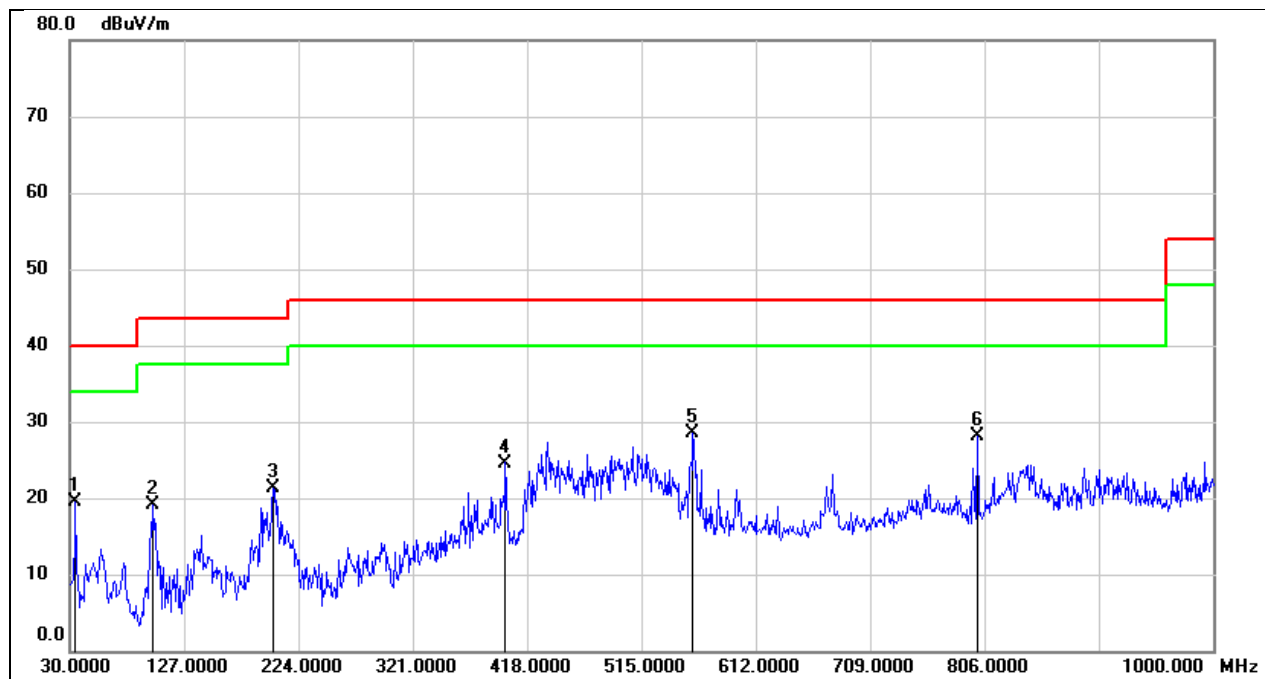

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	38.56	-18.99	19.57	40.00	-20.43	QP
2	100.8100	40.27	-21.25	19.02	43.50	-24.48	QP
3	202.6600	37.96	-16.69	21.27	43.50	-22.23	QP
4	399.5700	37.56	-12.96	24.60	46.00	-21.40	QP
5	558.6500	38.83	-10.33	28.50	46.00	-17.50	QP
6	800.1800	34.81	-6.63	28.18	46.00	-17.82	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

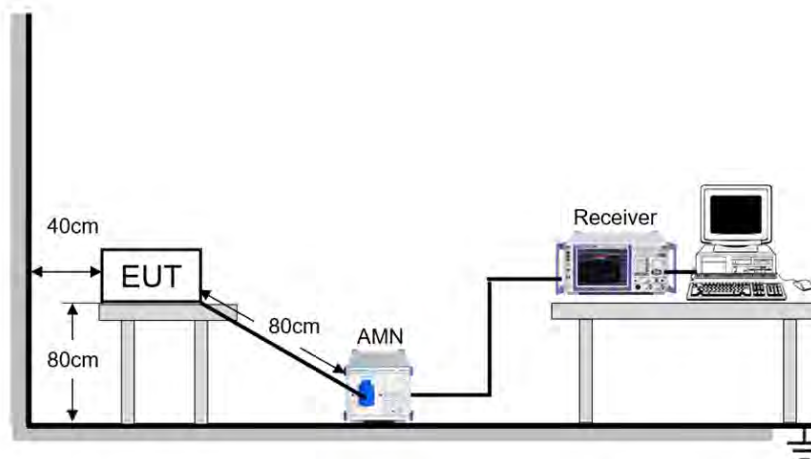

TEST ENVIRONMENT


Temperature	25.1°C	Relative Humidity	64.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	November 10, 2023	Test By	Denny Huang
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

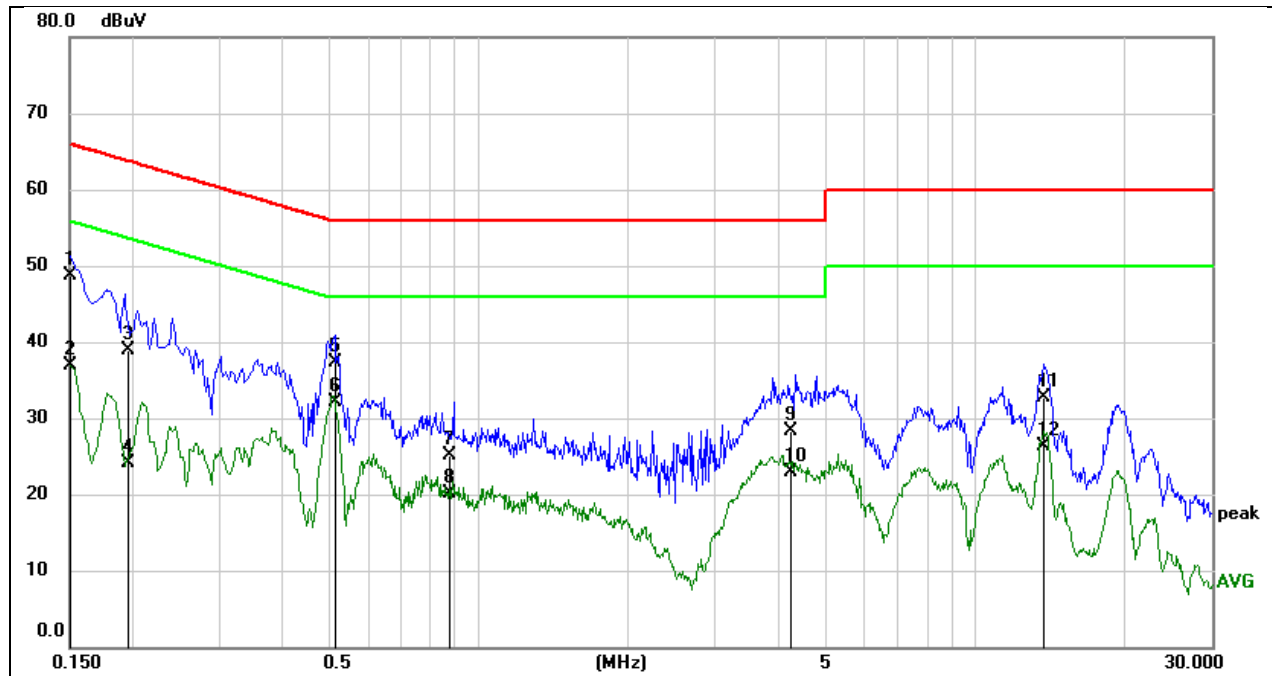


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	39.11	9.59	48.70	65.96	-17.26	QP
2	0.1508	27.37	9.59	36.96	55.96	-19.00	AVG
3	0.1968	29.25	9.59	38.84	63.74	-24.90	QP
4	0.1968	14.57	9.59	24.16	53.74	-29.58	AVG
5	0.5105	27.67	9.60	37.27	56.00	-18.73	QP
6	0.5105	22.51	9.60	32.11	46.00	-13.89	AVG
7	0.8777	15.57	9.60	25.17	56.00	-30.83	QP
8	0.8777	10.59	9.60	20.19	46.00	-25.81	AVG
9	4.2843	18.67	9.70	28.37	56.00	-27.63	QP
10	4.2843	13.27	9.70	22.97	46.00	-23.03	AVG
11	13.8674	22.97	9.76	32.73	60.00	-27.27	QP
12	13.8674	16.48	9.76	26.24	50.00	-23.76	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

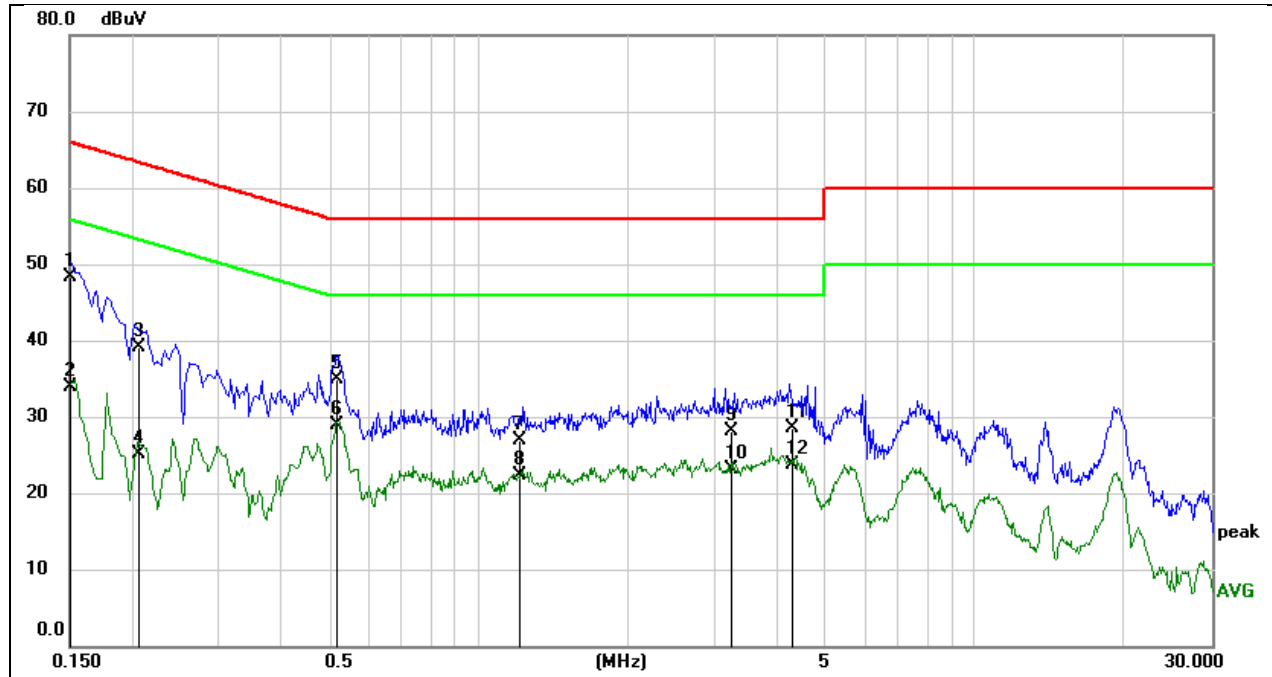

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1514	38.62	9.59	48.21	65.92	-17.71	QP
2	0.1514	24.23	9.59	33.82	55.92	-22.10	AVG
3	0.2066	29.51	9.59	39.10	63.34	-24.24	QP
4	0.2066	15.49	9.59	25.08	53.34	-28.26	AVG
5	0.5198	25.29	9.60	34.89	56.00	-21.11	QP
6	0.5198	19.32	9.60	28.92	46.00	-17.08	AVG
7	1.2161	17.22	9.61	26.83	56.00	-29.17	QP
8	1.2161	12.69	9.61	22.30	46.00	-23.70	AVG
9	3.2368	18.35	9.67	28.02	56.00	-27.98	QP
10	3.2368	13.43	9.67	23.10	46.00	-22.90	AVG
11	4.2945	18.76	9.70	28.46	56.00	-27.54	QP
12	4.2945	13.92	9.70	23.62	46.00	-22.38	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

Appendix A: Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
a	1.39	2.02	0.6881	68.81	1.62	0.72	1
n20	1.30	1.92	0.6771	67.71	1.69	0.77	1
n40	0.64	1.25	0.5120	51.20	2.91	1.56	2
ac80	0.26	0.88	0.2955	29.55	5.30	3.85	4
ax20	3.88	4.61	0.8416	84.16	0.75	0.26	1
ax40	1.97	2.68	0.7351	73.51	1.34	0.51	1
ax80	0.98	1.69	0.5799	57.99	2.37	1.02	2

Note:

Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.