


802.11n HT20 mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

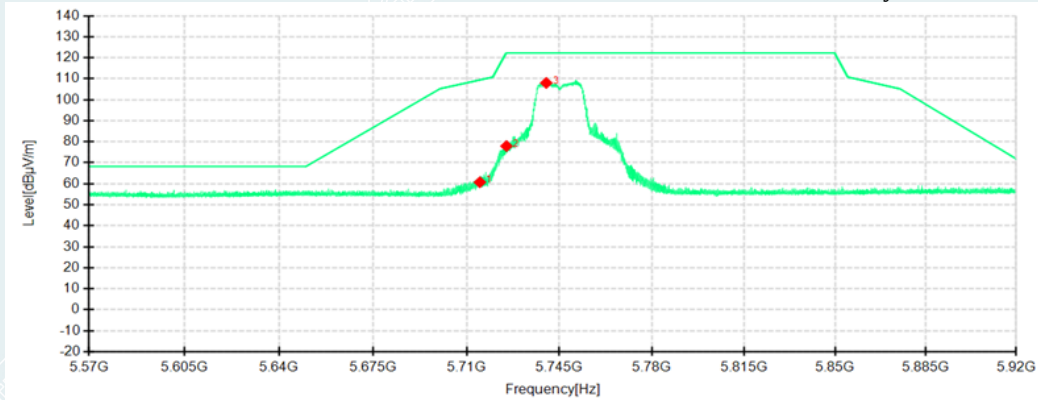

Detector mode: Peak

Polarity: Vertical

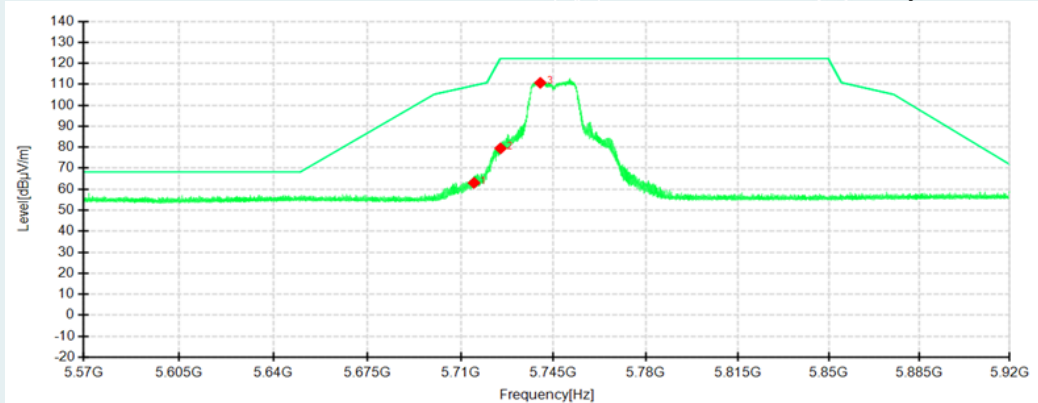


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5715.0000	44.10	60.71	16.61	109.40	48.69	200	350	Horizontal
2	5725.0000	61.13	77.92	16.79	122.20	44.28	200	356	Horizontal
3	5740.0000	90.92	107.99	17.07	122.20	14.21	200	4	Horizontal
1	5715.0000	46.44	63.05	16.61	109.40	46.35	200	32	Vertical
2	5725.0000	62.70	79.49	16.79	122.20	42.71	200	57	Vertical
3	5740.0000	93.61	110.68	17.07	122.20	11.52	200	13	Vertical

802.11n HT20 mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

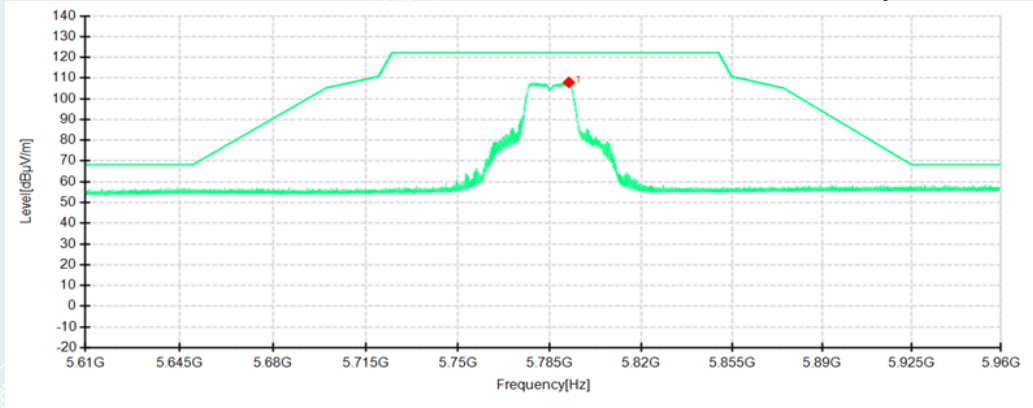

Detector mode: Peak

Polarity: Vertical

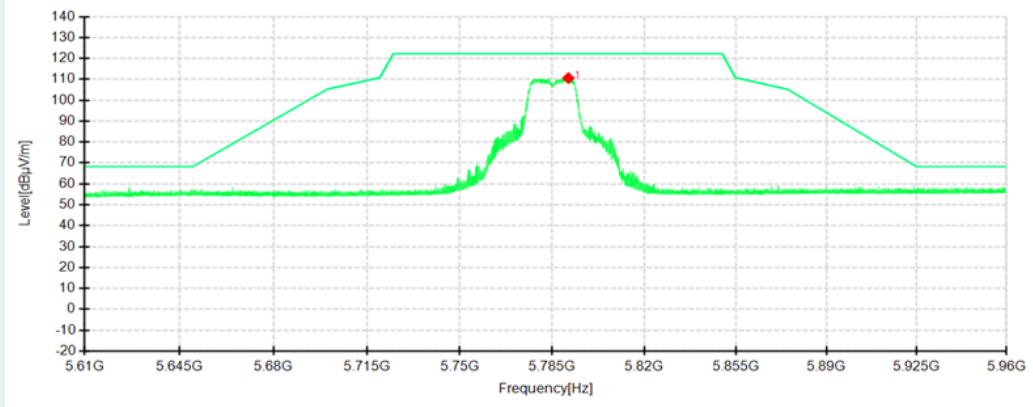


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5792.2625	90.83	107.92	17.09	122.20	14.28	200	359	Horizontal
1	5791.0725	93.50	110.59	17.09	122.20	11.61	200	33	Vertical

802.11n HT20 mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

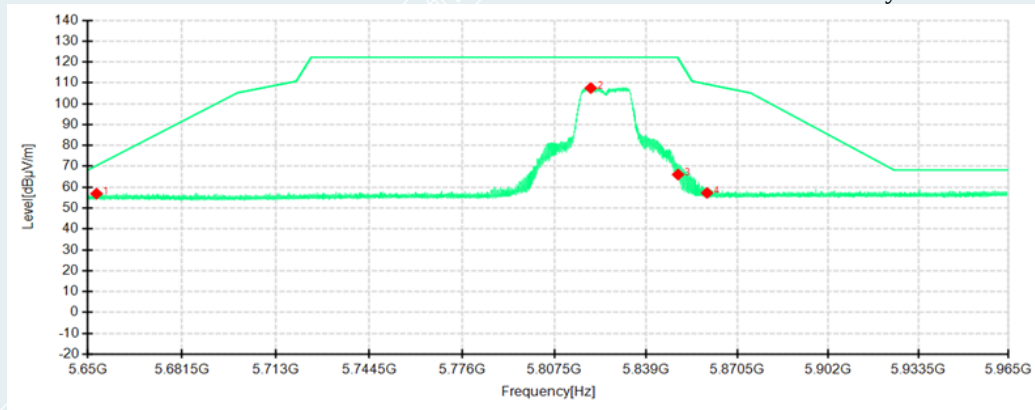

Detector mode: Peak

Polarity: Vertical

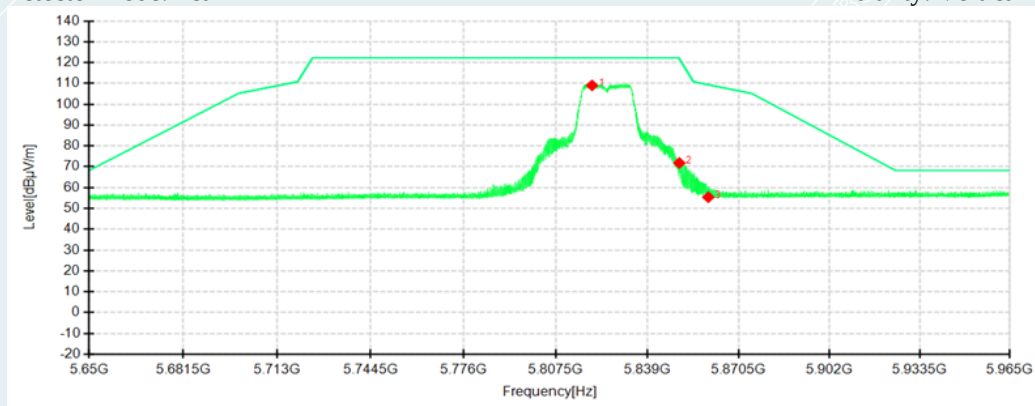


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5652.9453	40.10	56.89	16.79	70.39	13.50	200	148	Horizontal
2	5820.0000	90.46	107.53	17.07	122.20	14.67	200	1	Horizontal
3	5850.0000	48.97	66.06	17.09	122.18	56.12	200	28	Horizontal
4	5860.0000	40.10	57.26	17.16	109.40	52.14	200	4	Horizontal
1	5820.0000	91.97	109.04	17.07	122.20	13.16	200	11	Vertical
2	5850.0000	54.72	71.81	17.09	122.18	50.37	200	61	Vertical
3	5860.0000	38.22	55.38	17.16	109.40	54.02	100	141	Vertical

802.11n HT40 mode/5755MHz


Detector mode: Peak

Polarity: Horizontal

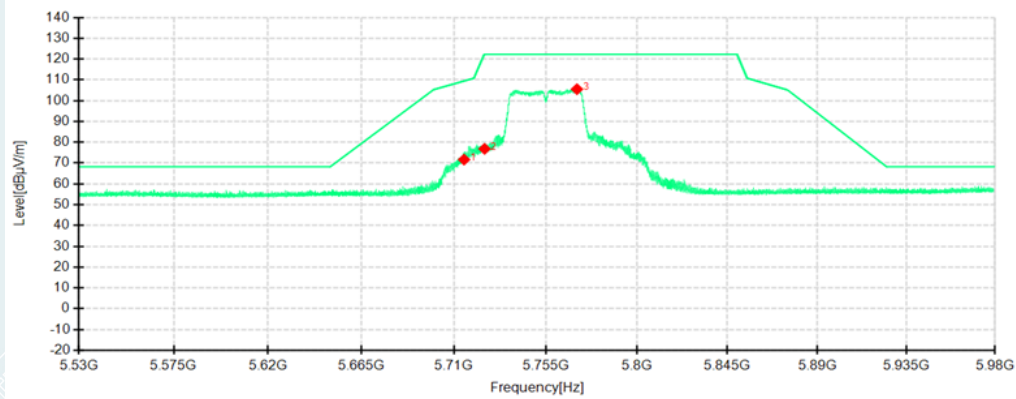

Detector mode: Peak

Polarity: Vertical

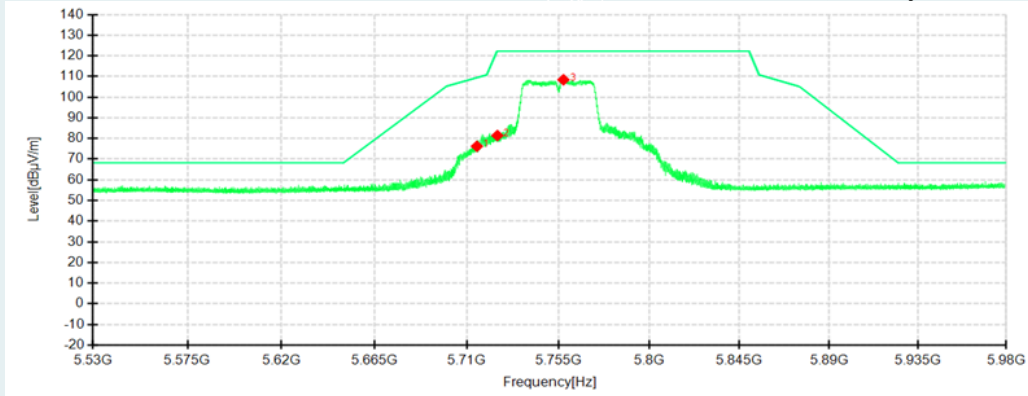


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5715.0000	55.05	71.66	16.61	109.41	37.75	100	350	Horizontal
2	5725.0000	60.04	76.83	16.79	122.20	45.37	200	0	Horizontal
3	5770.3450	88.35	105.52	17.17	122.20	16.68	200	0	Horizontal
1	5715.0000	59.60	76.21	16.61	109.41	33.20	200	24	Vertical
2	5725.0000	64.63	81.42	16.79	122.20	40.78	200	49	Vertical
3	5757.5200	91.19	108.41	17.22	122.20	13.79	200	24	Vertical

802.11n HT40 mode/5795MHz


Detector mode: Peak

Polarity: Horizontal

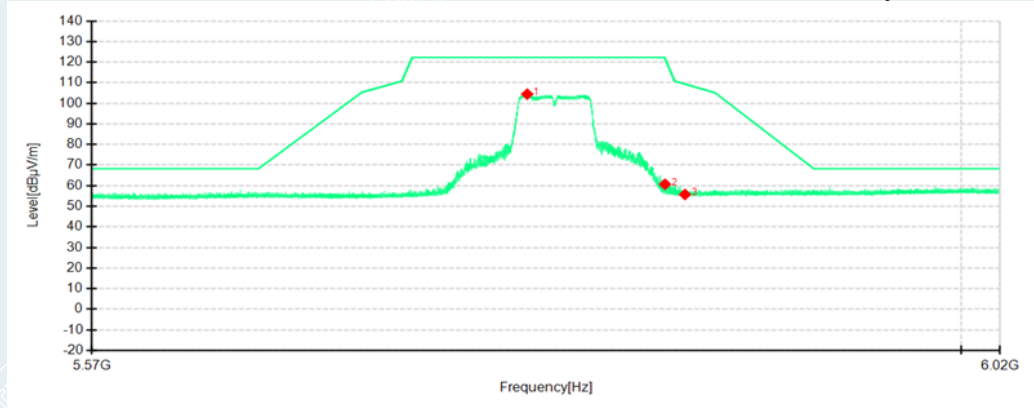

Detector mode: Peak

Polarity: Vertical

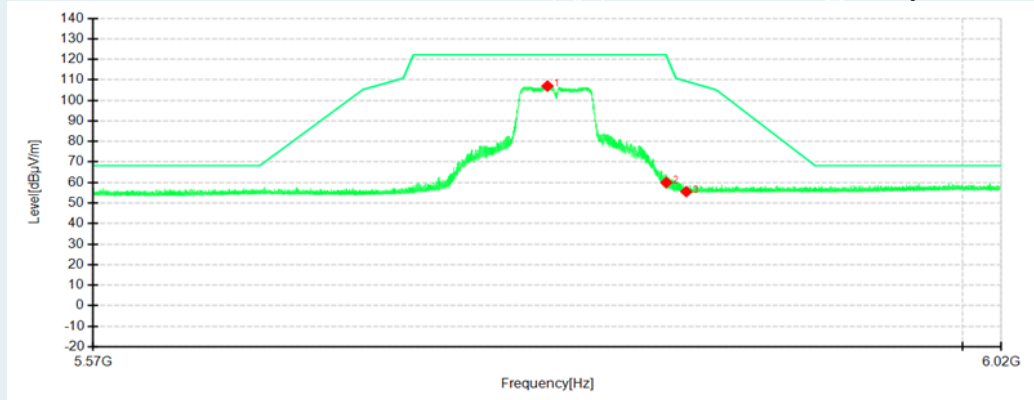


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5781.4325	87.32	104.45	17.13	122.20	17.75	200	0	Horizontal
2	5850.0000	43.60	60.69	17.09	122.17	61.48	200	6	Horizontal
3	5860.0000	38.55	55.71	17.16	109.40	53.69	100	1	Horizontal
1	5790.8150	89.92	107.01	17.09	122.20	15.19	200	23	Vertical
2	5850.0000	42.89	59.98	17.09	122.17	62.19	200	55	Vertical
3	5860.0000	38.37	55.53	17.16	109.40	53.87	200	200	Vertical

802.11ac VHT80 mode/5775MHz


Detector mode: Peak

Polarity: Horizontal

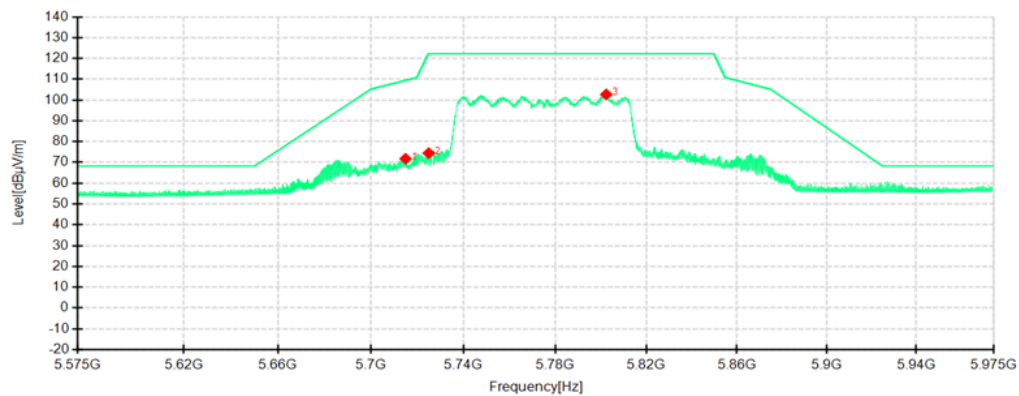

Detector mode: Peak

Polarity: Vertical

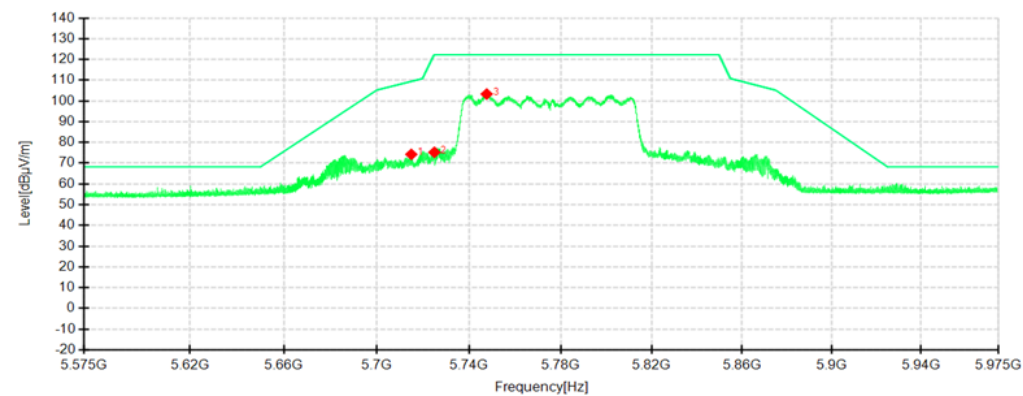

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	5715.0000	55.16	71.77	16.61	109.40	37.63	100	346	Horizontal
2	5725.0000	57.66	74.45	16.79	122.20	47.75	200	359	Horizontal
3	5802.4000	85.64	102.70	17.06	122.20	19.50	200	0	Horizontal
1	5715.0000	57.64	74.25	16.61	109.40	35.15	100	56	Vertical
2	5725.0000	58.45	75.24	16.79	122.20	46.96	200	359	Vertical
3	5747.7200	86.12	103.33	17.21	122.20	18.87	200	359	Vertical

7. RESTRICTED BANDS OF OPERATION

7.1.LIMITS

Section 15.407(b)(7) The provisions of §15.205 apply to intentional radiators operating under this section.


15.205(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

7.2.TEST PROCEDURES

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.3.TEST SETUP

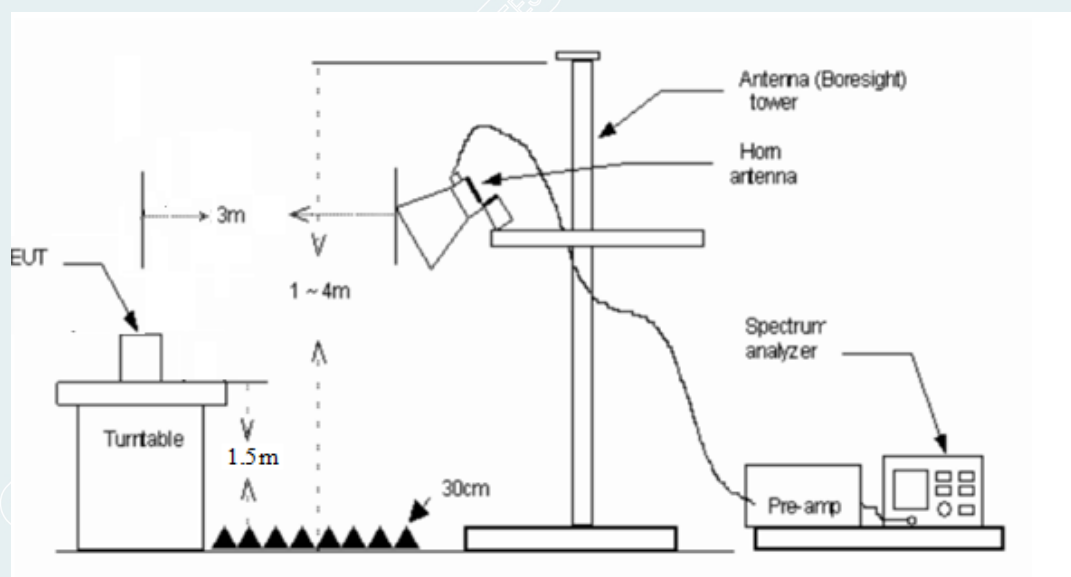


7.4.TEST RESULTS

802.11a mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

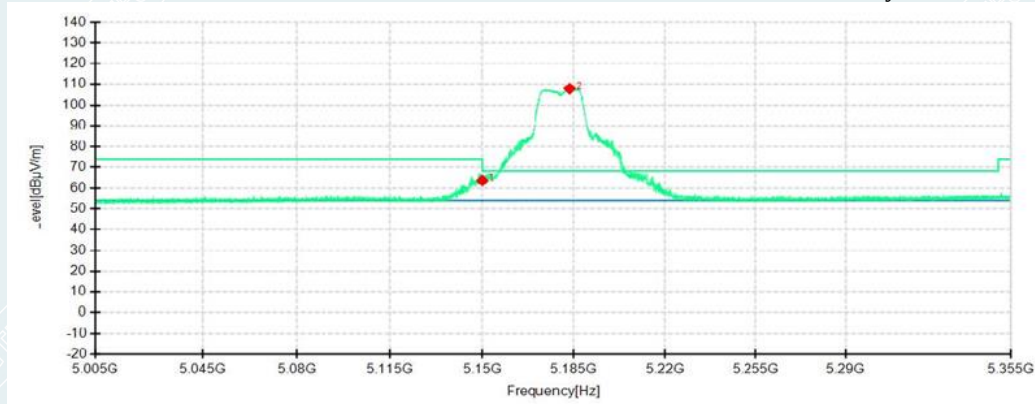

Detector mode: Peak

Polarity: Vertical

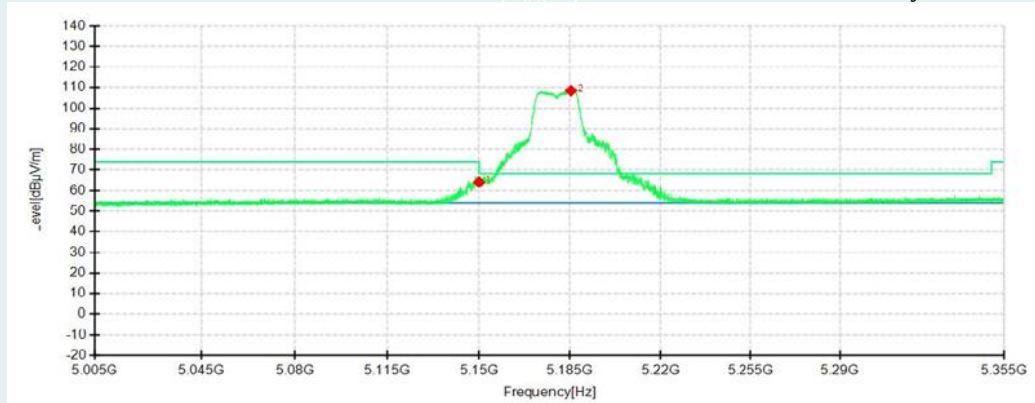


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	49.80	63.57	13.77	68.30	4.73	100	359	Horizontal	/
2	5183.4650	93.40	107.99	14.59	68.30	-39.69	200	218	Horizontal	N/A
1	5150.0000	50.26	64.03	13.77	68.30	4.27	200	108	Vertical	/
2	5185.4600	93.88	108.52	14.64	68.30	-40.22	200	79	Vertical	N/A

802.11a mode/5180MHz


Detector mode: Average

Polarity: Horizontal

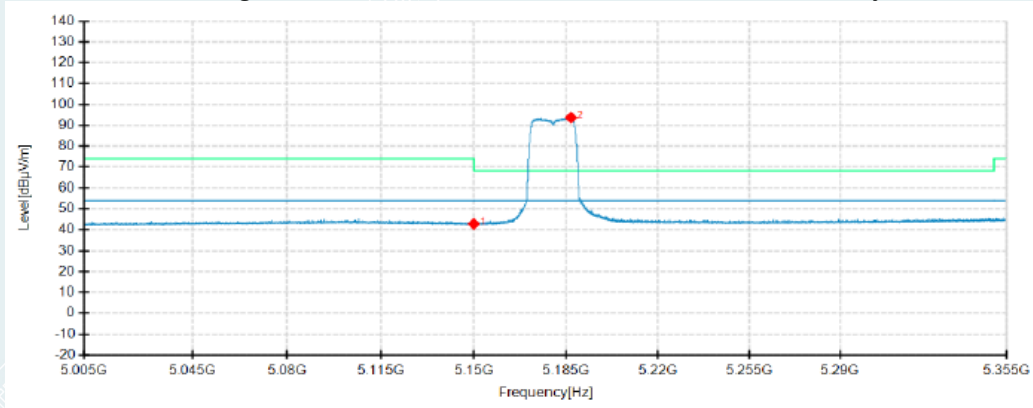

Detector mode: Average

Polarity: Vertical

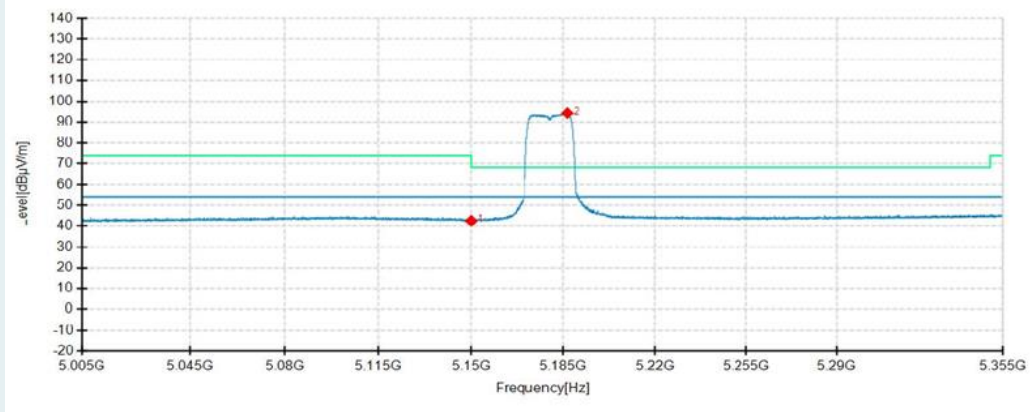


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	29.03	42.80	13.77	54.00	11.20	200	142	Horizontal	/
2	5186.7900	79.00	93.67	14.67	54.00	-39.67	200	357	Horizontal	N/A
1	5150.0000	28.68	42.45	13.77	54.00	11.55	100	146	Vertical	/
2	5186.6150	79.63	94.29	14.66	54.00	-40.29	200	142	Vertical	N/A

802.11a mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

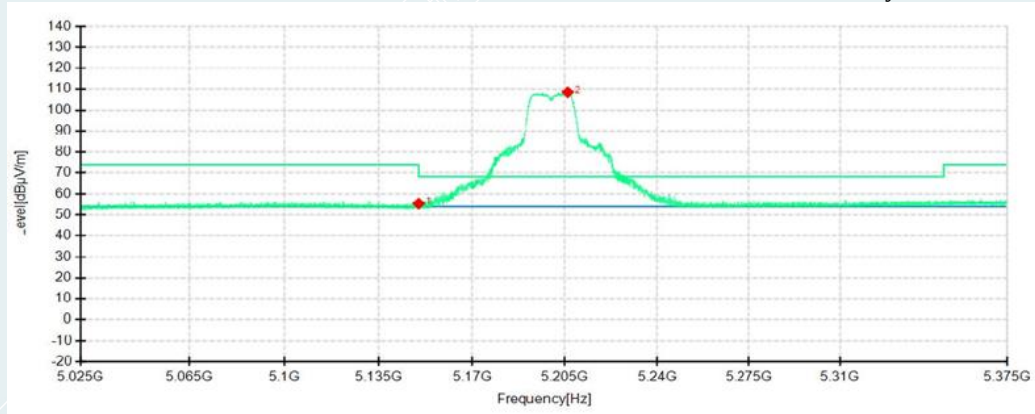

Detector mode: Peak

Polarity: Vertical

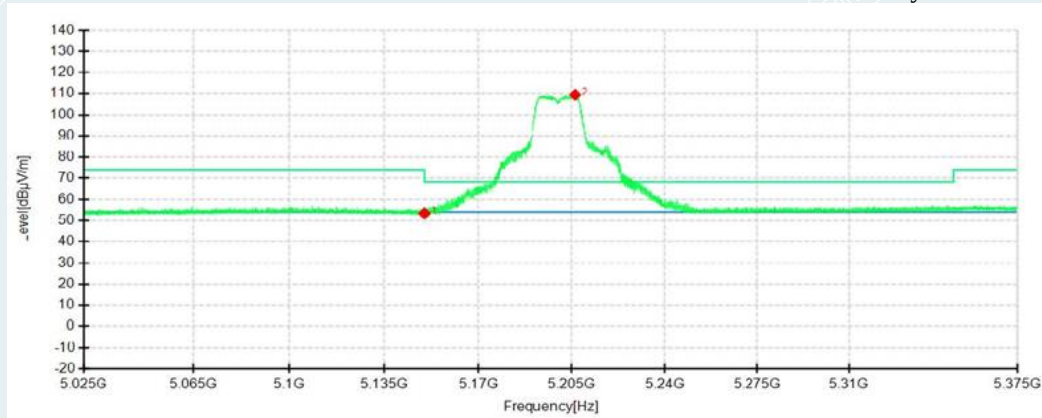


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	41.65	55.42	13.77	68.30	12.88	100	142	Horizontal	/
2	5206.1600	93.67	108.56	14.89	68.30	-40.26	200	0	Horizontal	N/A
1	5150.0000	39.55	53.32	13.77	68.30	14.98	200	66	Vertical	/
2	5206.3350	94.55	109.44	14.89	68.30	-41.14	200	80	Vertical	N/A

802.11a mode/5200MHz


Detector mode: Average

Polarity: Horizontal

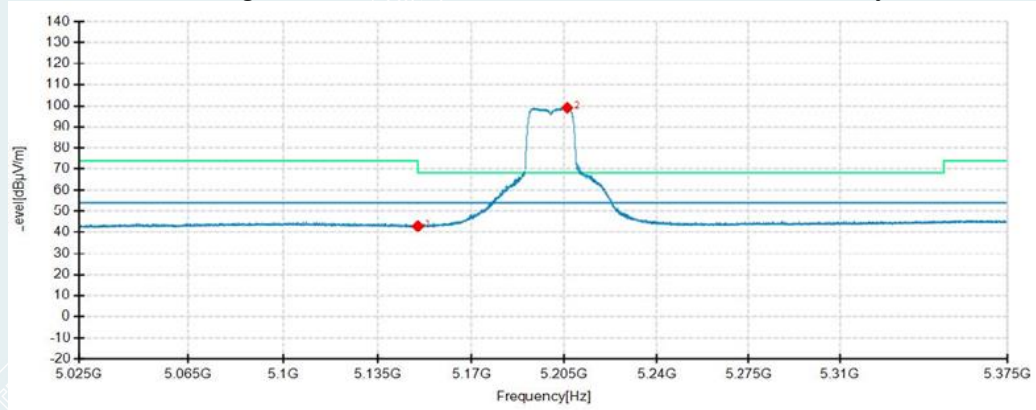

Detector mode: Average

Polarity: Vertical

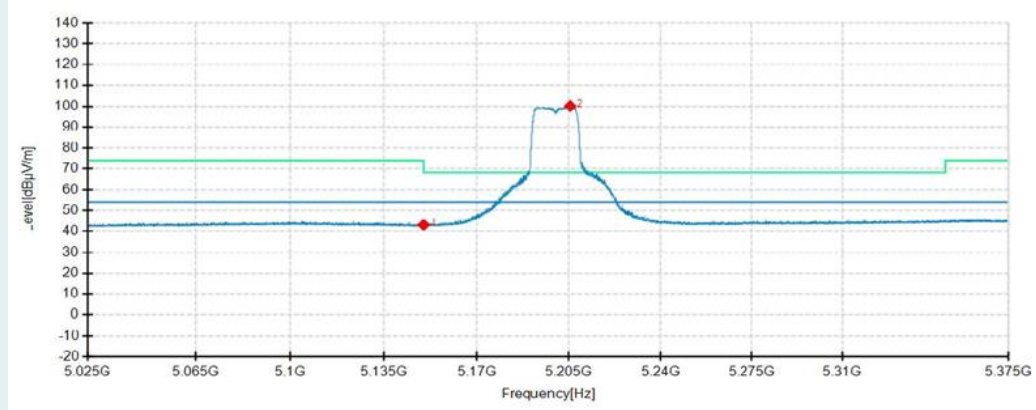


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	29.09	42.86	13.77	54.00	11.14	100	360	Horizontal	/
2	5206.1950	84.14	99.03	14.89	54.00	-45.03	200	218	Horizontal	N/A
1	5150.0000	29.38	43.15	13.77	54.00	10.85	100	360	Vertical	/
2	5205.5650	85.17	100.07	14.90	54.00	-46.07	200	80	Vertical	N/A

802.11a mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

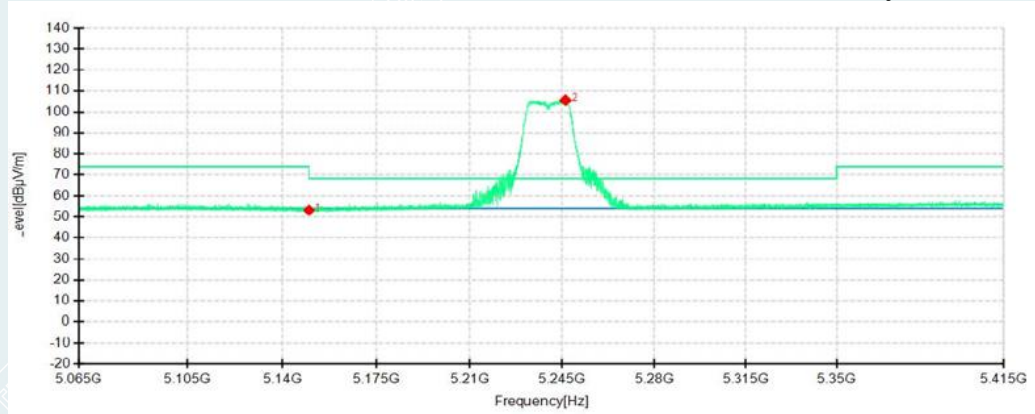

Detector mode: Peak

Polarity: Vertical

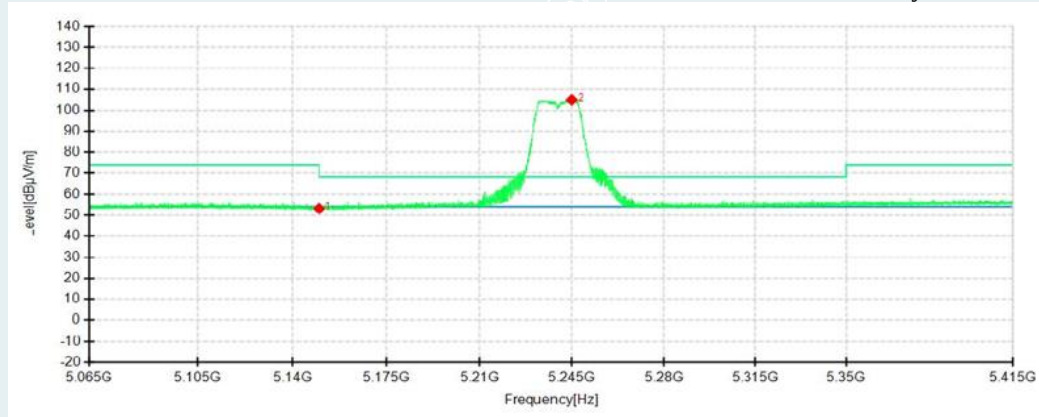


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	39.31	53.08	13.77	68.30	15.22	100	177	Horizontal	/
2	5246.3350	91.27	105.51	14.24	68.30	-37.21	200	142	Horizontal	N/A
1	5150.0000	39.35	53.12	13.77	68.30	15.18	200	142	Vertical	/
2	5245.0050	90.65	104.91	14.26	68.30	-36.61	200	142	Vertical	N/A

802.11a mode/5240MHz


Detector mode: Average

Polarity: Horizontal

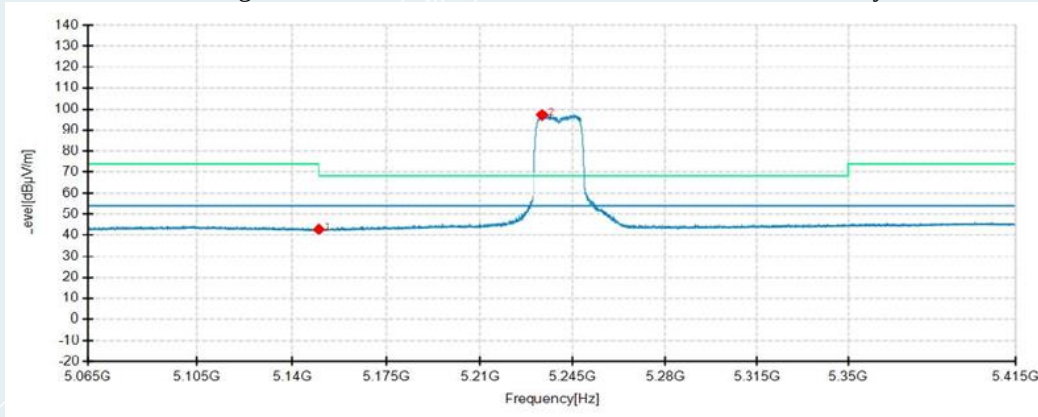

Detector mode: Average

Polarity: Vertical

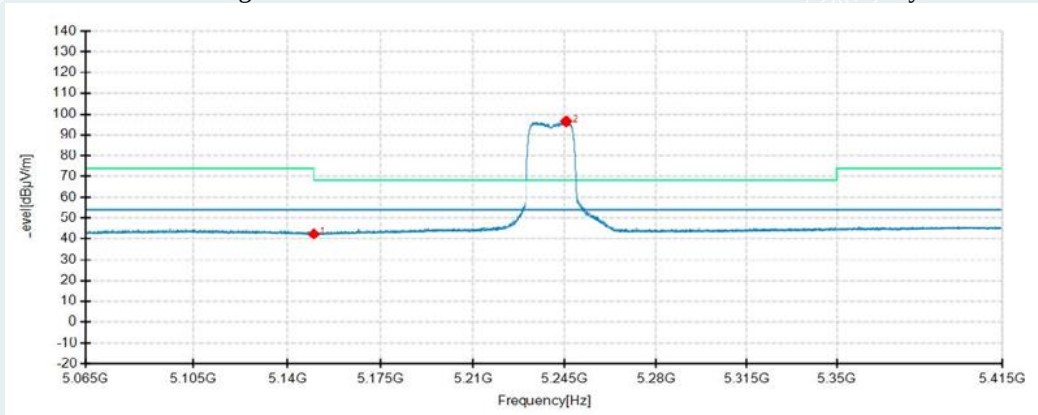


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	29.01	42.78	13.77	54.00	11.22	100	60	Horizontal	/
2	5233.5600	82.81	97.26	14.45	54.00	-43.26	200	142	Horizontal	N/A
1	5150.0000	28.52	42.29	13.77	54.00	11.71	200	142	Vertical	/
2	5245.6700	82.30	96.55	14.25	54.00	-42.55	200	142	Vertical	N/A

802.11a mode/5260MHz


Detector mode: Peak

Polarity: Horizontal

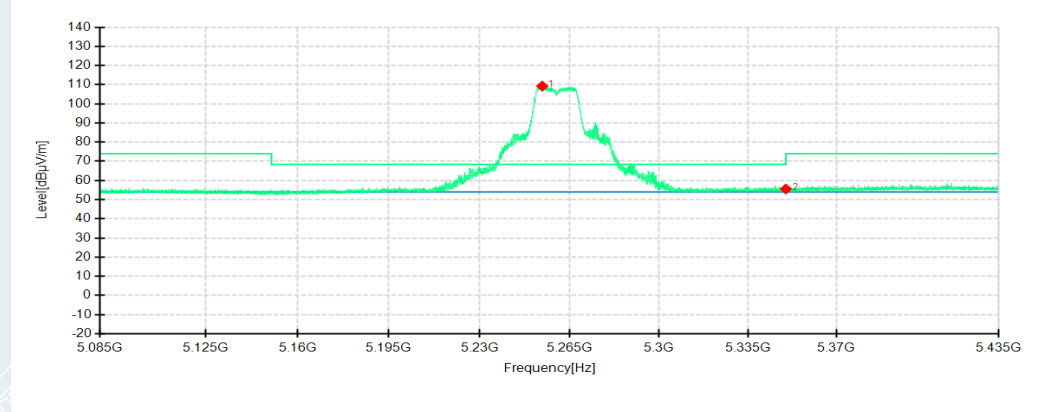

Detector mode: Peak

Polarity: Vertical

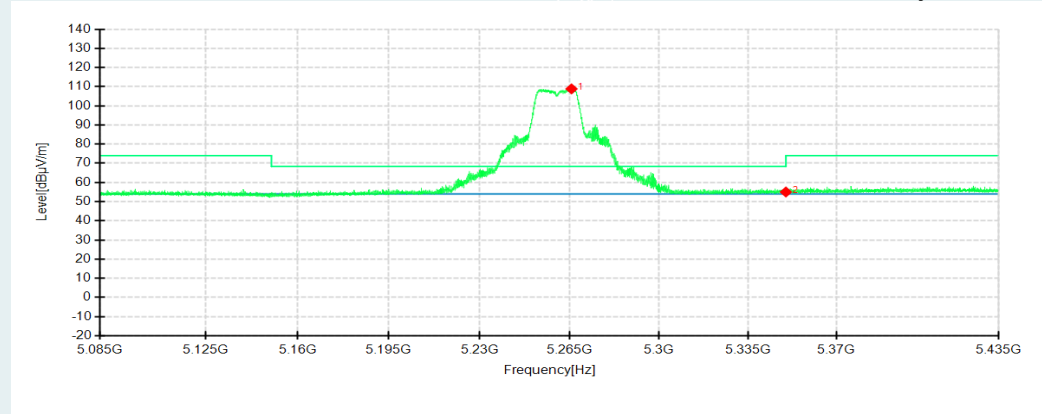


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5254.3300	95.03	109.22	14.19	68.30	-40.92	200	142	Horizontal	N/A
2	5350.0000	40.52	55.54	15.02	74.00	18.46	200	142	Horizontal	/
1	5265.7400	94.60	108.83	14.23	68.30	-40.53	200	142	Vertical	N/A
2	5350.0000	40.00	55.02	15.02	74.00	18.98	100	218	Vertical	/

802.11a mode/5260MHz


Detector mode: Average

Polarity: Horizontal

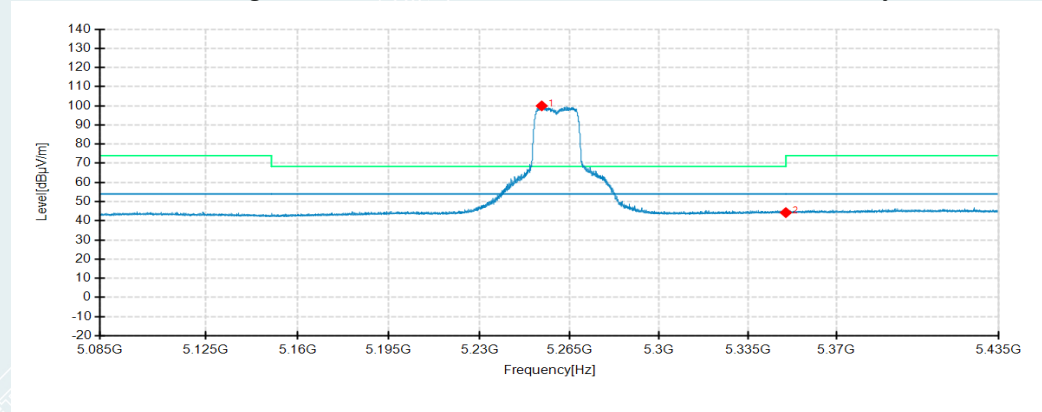

Detector mode: Average

Polarity: Vertical

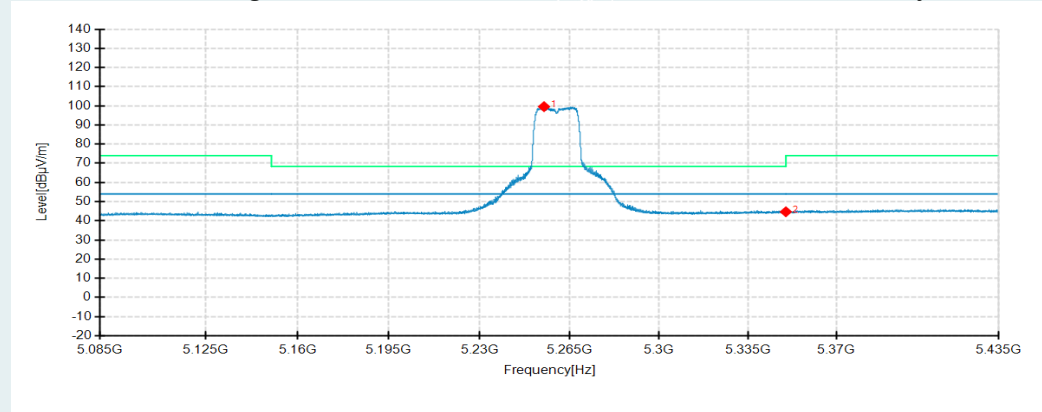


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5254.1200	85.77	99.96	14.19	54.00	-45.96	200	142	Horizontal	N/A
2	5350.0000	29.24	44.26	15.02	54.00	9.74	200	349	Horizontal	/
1	5255.0300	85.36	99.56	14.20	54.00	-45.56	200	142	Vertical	N/A
2	5350.0000	29.68	44.70	15.02	54.00	9.30	200	184	Vertical	/

802.11a mode/5300MHz


Detector mode: Peak

Polarity: Horizontal

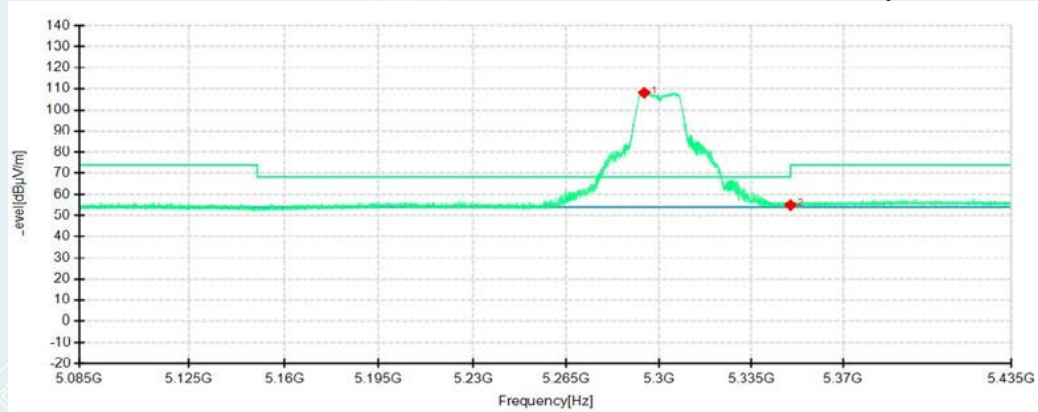

Detector mode: Peak

Polarity: Vertical

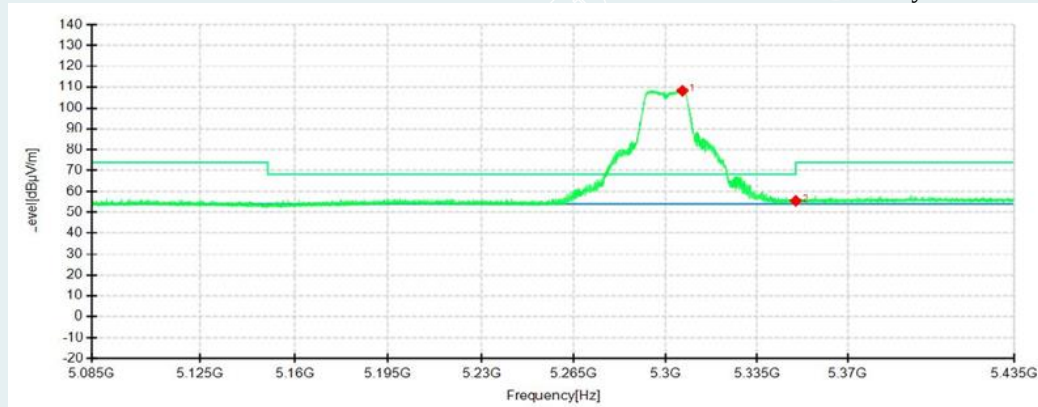


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5294.3350	93.88	108.19	14.31	68.30	-39.89	200	142	Horizontal	N/A
2	5350.0000	39.98	55.00	15.02	74.00	19.00	200	359	Horizontal	/
1	5306.3400	93.89	108.31	14.42	68.30	-40.01	200	142	Vertical	N/A
2	5350.0000	40.54	55.56	15.02	74.00	18.44	100	211	Vertical	/

802.11a mode/5300MHz


Detector mode: Average

Polarity: Horizontal

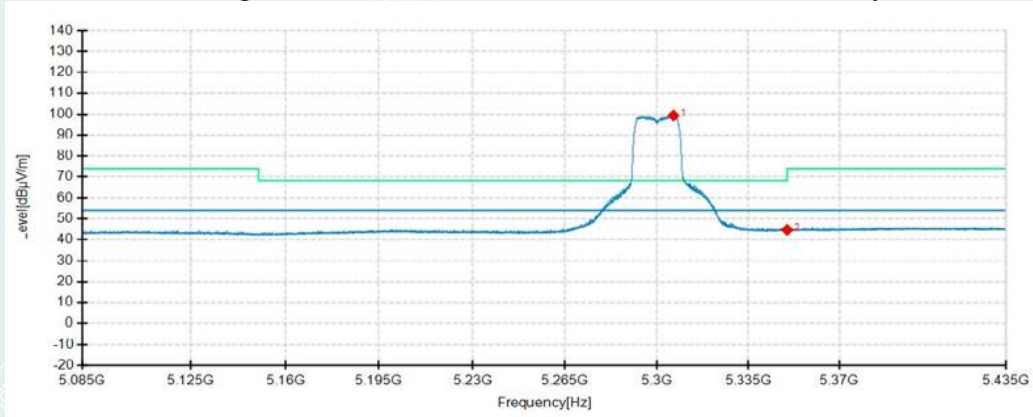

Detector mode: Average

Polarity: Vertical

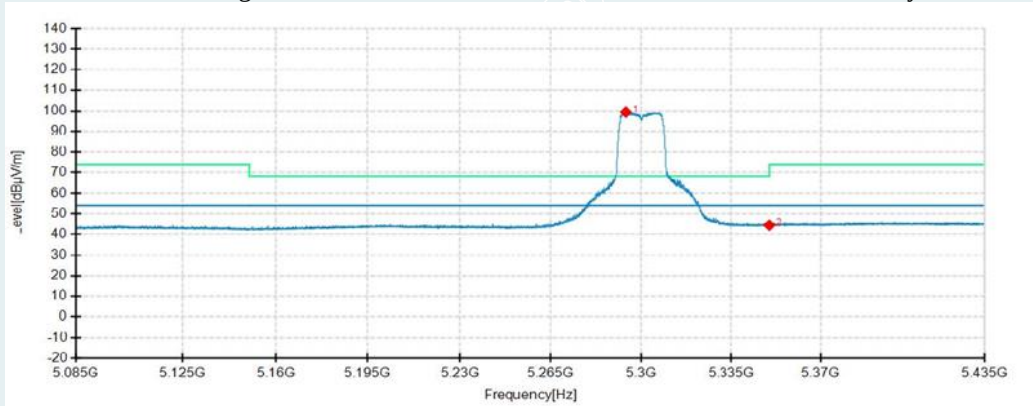


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5306.2350	84.89	99.31	14.42	54.00	-45.31	200	142	Horizontal	N/A
2	5350.0000	29.72	44.74	15.02	54.00	9.26	200	357	Horizontal	/
1	5293.9850	85.04	99.35	14.31	54.00	-45.35	200	142	Vertical	N/A
2	5350.0000	29.49	44.51	15.02	54.00	9.49	100	218	Vertical	/

802.11a mode/5320MHz


Detector mode: Peak

Polarity: Horizontal

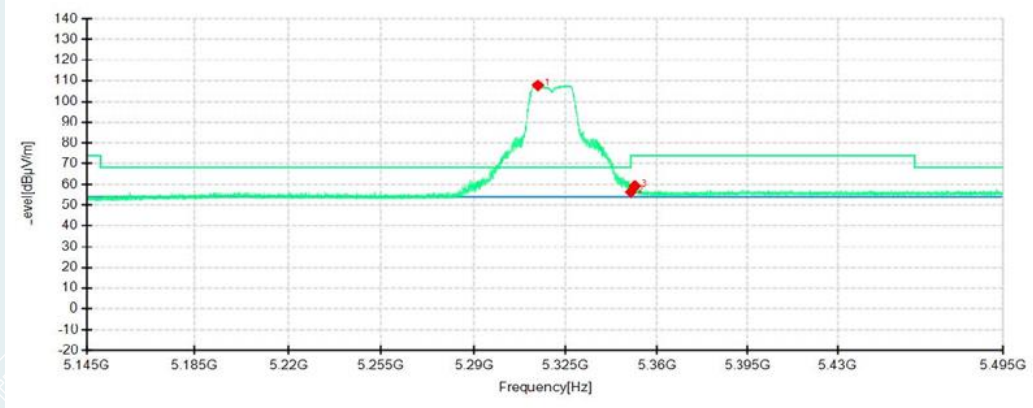

Detector mode: Peak

Polarity: Vertical

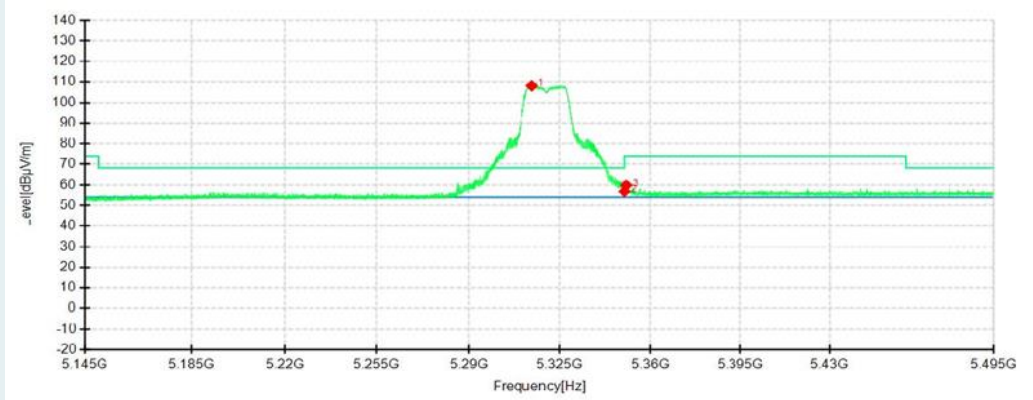


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5314.5750	93.32	107.85	14.53	68.30	-39.55	200	142	Horizontal	N/A
2	5350.0000	41.28	56.30	15.02	74.00	17.70	200	342	Horizontal	/
3	5351.5000	44.20	59.24	15.04	74.00	14.76	200	348	Horizontal	/
1	5314.3300	93.67	108.20	14.53	68.30	-39.90	200	142	Vertical	N/A
2	5350.0000	41.77	56.79	15.02	74.00	17.21	100	60	Vertical	/
3	5350.6600	44.82	59.85	15.03	74.00	14.15	200	142	Vertical	/

802.11a mode/5320MHz


Detector mode: Average

Polarity: Horizontal

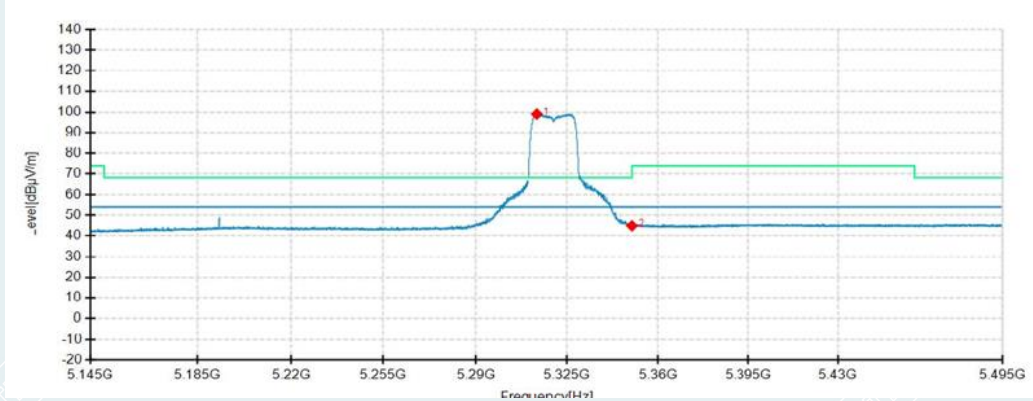

Detector mode: Average

Polarity: Vertical

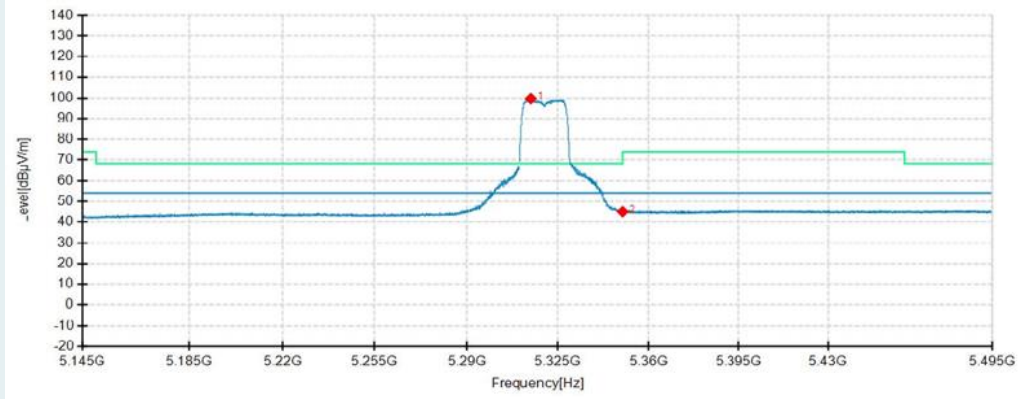


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5313.5600	84.46	98.98	14.52	54.00	-44.98	200	24	Horizontal	N/A
2	5350.0000	29.91	44.93	15.02	54.00	9.07	200	2	Horizontal	/
1	5314.7500	85.09	99.62	14.53	54.00	-45.62	200	113	Vertical	N/A
2	5350.0000	30.07	45.09	15.02	54.00	8.91	200	106	Vertical	/

802.11a mode/5500MHz


Detector mode: Peak

Polarity: Horizontal

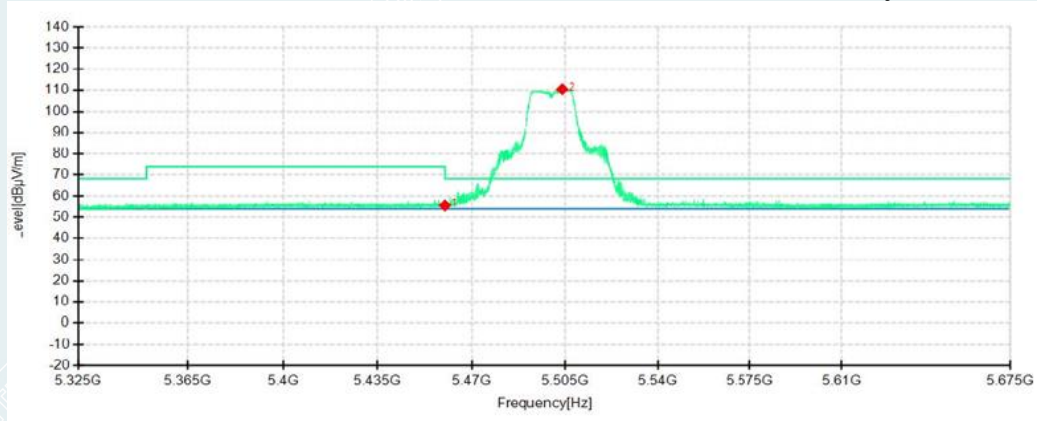

Detector mode: Peak

Polarity: Vertical

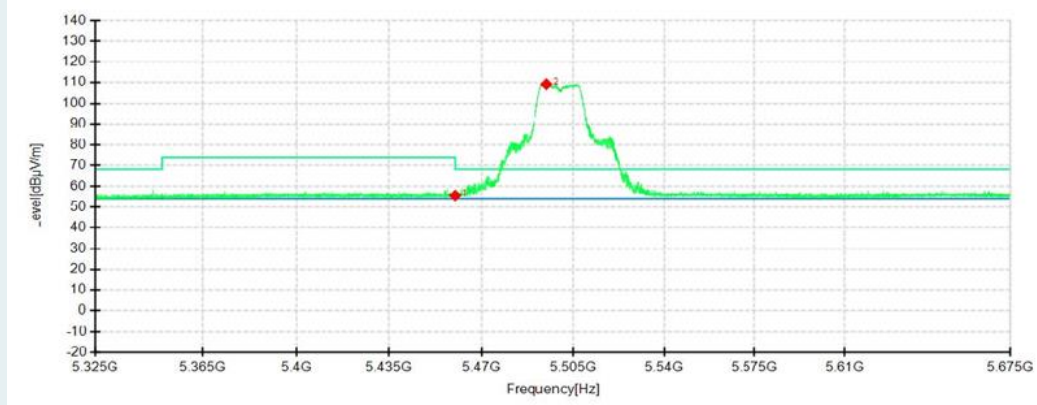


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	39.79	55.61	15.82	68.30	12.69	100	156	Horizontal	/
2	5504.0600	94.46	110.47	16.01	68.30	-42.17	200	218	Horizontal	N/A
1	5460.0000	39.72	55.54	15.82	68.30	12.76	200	218	Vertical	/
2	5494.8900	93.30	109.25	15.95	68.30	-40.95	200	121	Vertical	N/A

802.11a mode/5500MHz


Detector mode: Average

Polarity: Horizontal

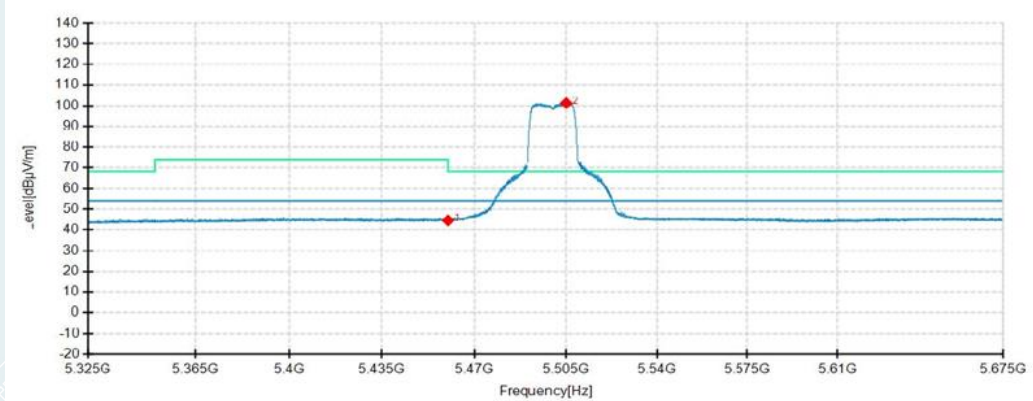

Detector mode: Average

Polarity: Vertical

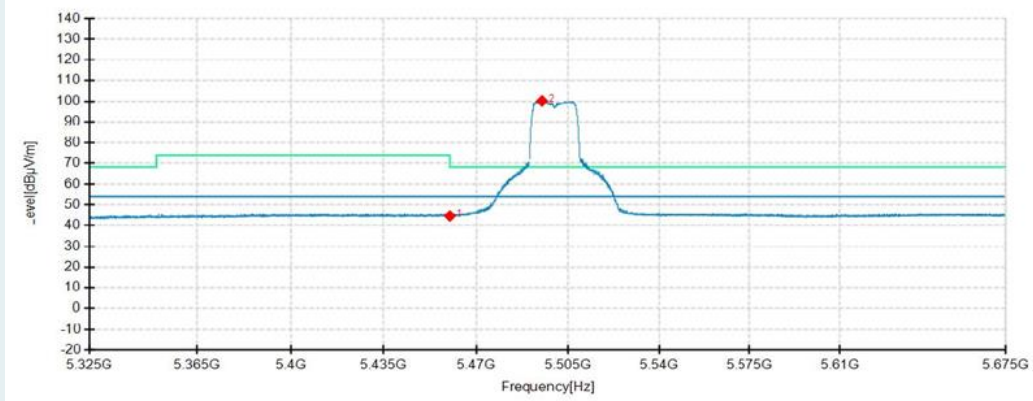


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	28.80	44.62	15.82	54.00	9.38	200	218	Horizontal	/
2	5505.2150	85.23	101.25	16.02	54.00	-47.25	200	218	Horizontal	N/A
1	5460.0000	28.83	44.65	15.82	54.00	9.35	200	39	Vertical	/
2	5495.2400	84.12	100.07	15.95	54.00	-46.07	200	115	Vertical	N/A

802.11a mode/5580MHz


Detector mode: Peak

Polarity: Horizontal

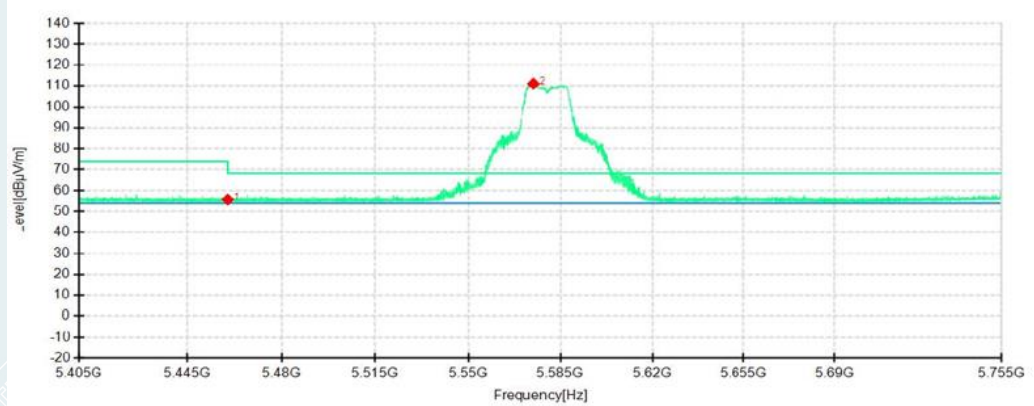

Detector mode: Peak

Polarity: Vertical

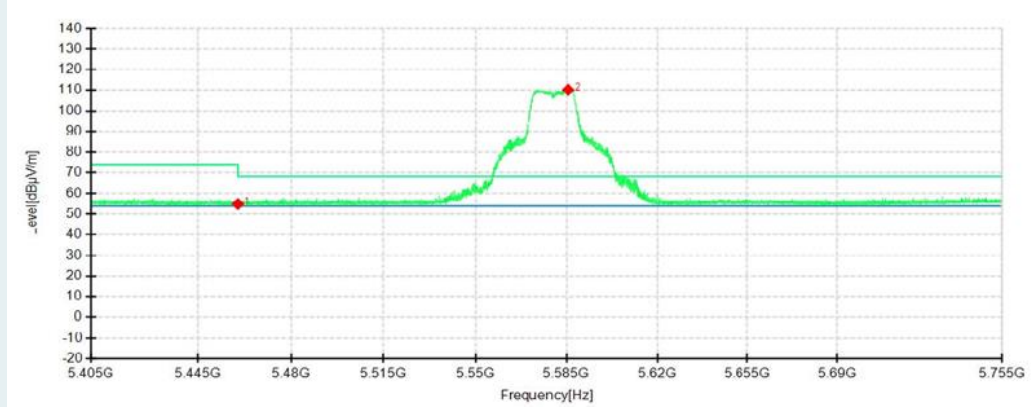


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	39.92	55.74	15.82	68.30	12.56	100	231	Horizontal	/
2	5574.8200	94.82	111.03	16.21	68.30	-42.73	200	218	Horizontal	N/A
1	5460.0000	39.11	54.93	15.82	68.30	13.37	200	6	Vertical	/
2	5585.6700	94.10	110.19	16.09	68.30	-41.89	200	25	Vertical	N/A

802.11a mode/5580MHz


Detector mode: Average

Polarity: Horizontal

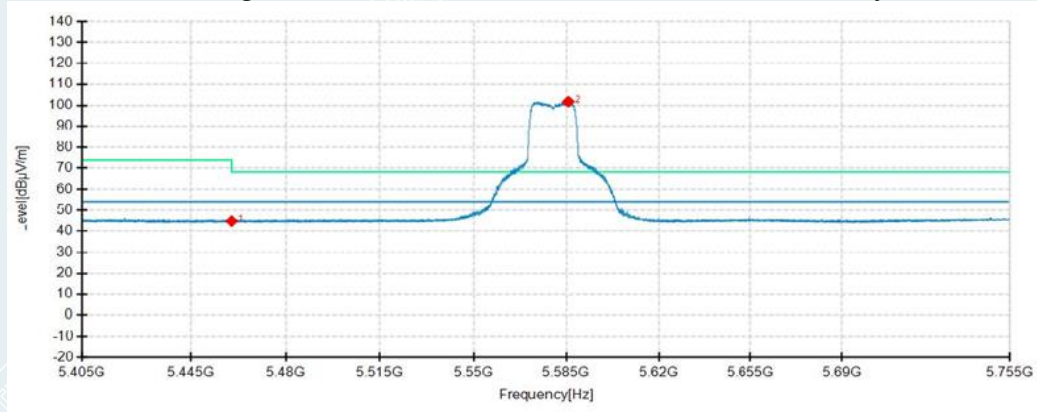

Detector mode: Average

Polarity: Vertical

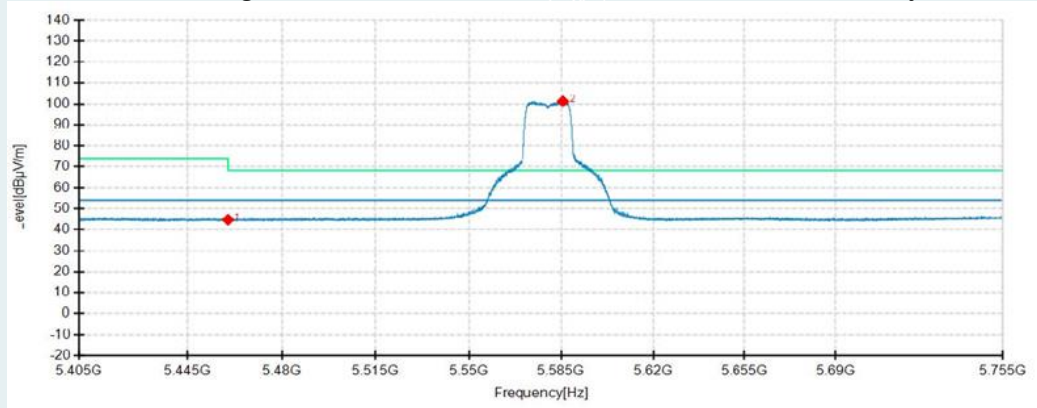


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	29.05	44.87	15.82	54.00	9.13	100	184	Horizontal	/
2	5585.8100	85.56	101.65	16.09	54.00	-47.65	200	218	Horizontal	N/A
1	5460.0000	28.97	44.79	15.82	54.00	9.21	100	143	Vertical	/
2	5585.6700	85.09	101.18	16.09	54.00	-47.18	200	30	Vertical	N/A

802.11a mode/5700MHz


Detector mode: Peak

Polarity: Horizontal

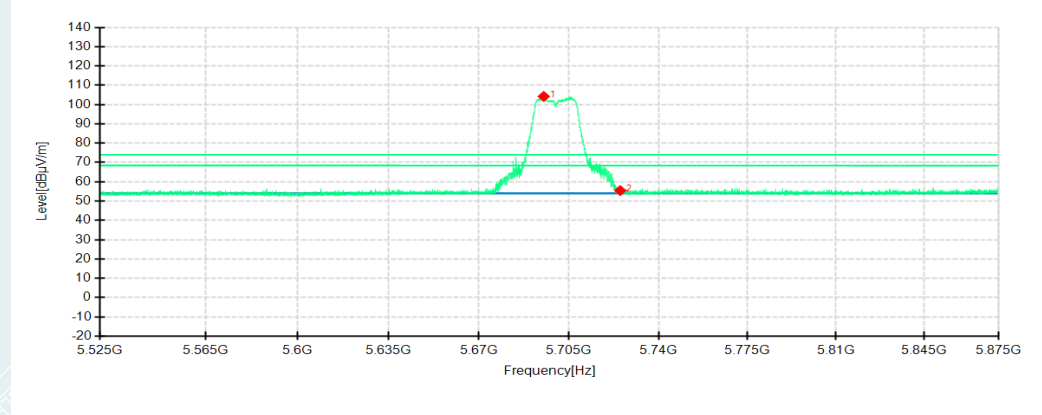

Detector mode: Peak

Polarity: Vertical

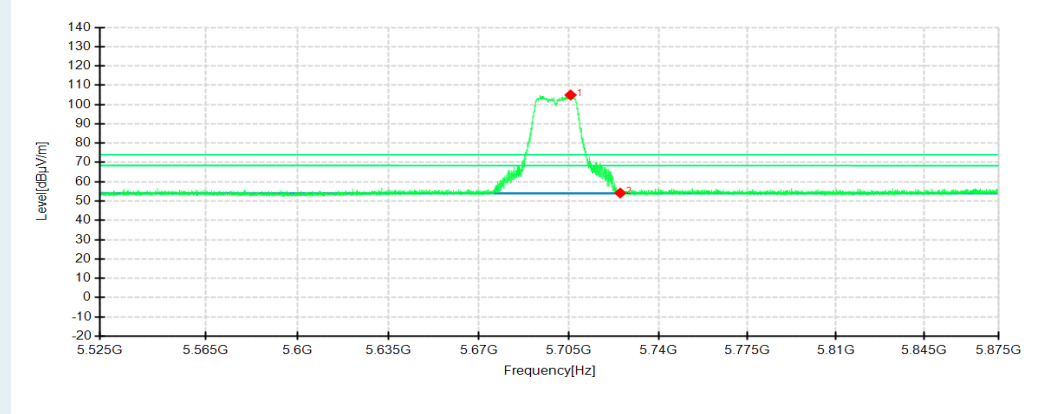


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5695.1350	87.83	104.21	16.38	68.30	-35.91	200	358	Horizontal	N/A
2	5725.0000	38.64	55.43	16.79	68.30	12.87	100	25	Horizontal	/
1	5705.6000	88.52	104.95	16.43	68.30	-36.65	200	66	Vertical	N/A
2	5725.0000	37.36	54.15	16.79	68.30	14.15	100	142	Vertical	/

802.11a mode/5700MHz


Detector mode: Average

Polarity: Horizontal

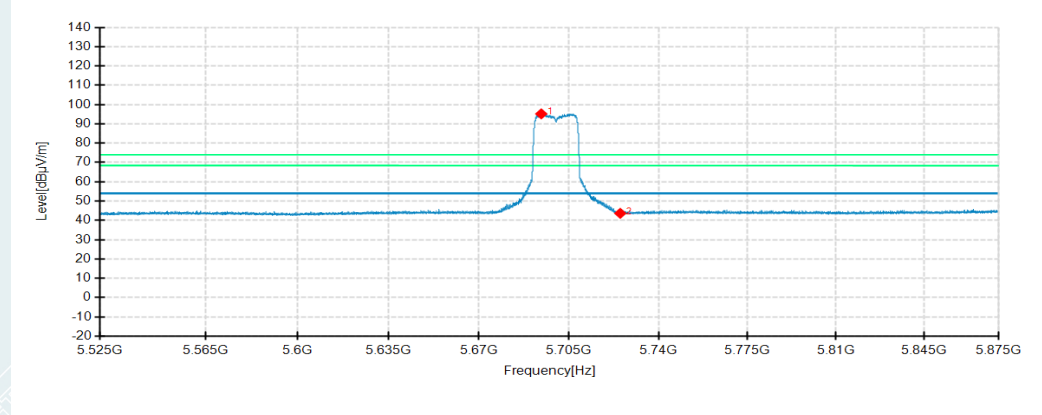

Detector mode: Average

Polarity: Vertical

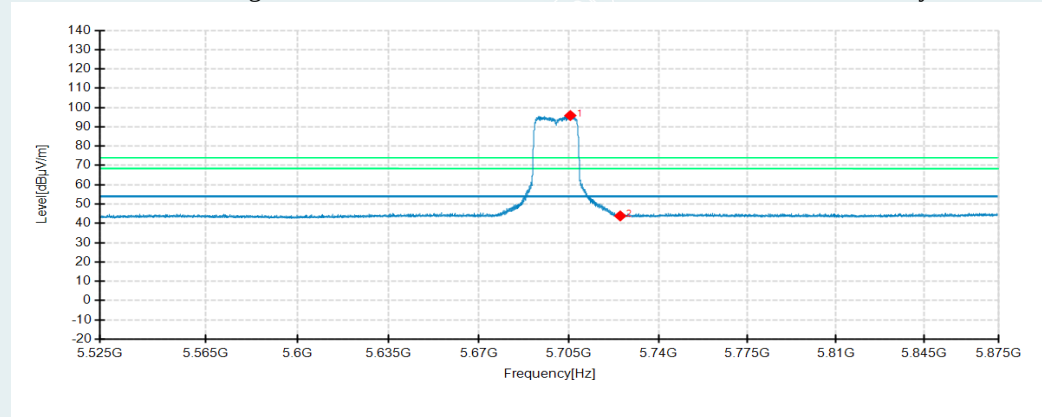


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5694.1900	78.79	95.18	16.39	54.00	-41.18	200	142	Horizontal	N/A
2	5725.0000	26.85	43.64	16.79	54.00	10.36	200	342	Horizontal	/
1	5705.4950	79.42	95.85	16.43	54.00	-41.85	200	61	Vertical	N/A
2	5725.0000	27.04	43.83	16.79	54.00	10.17	200	142	Vertical	/

802.11n HT20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

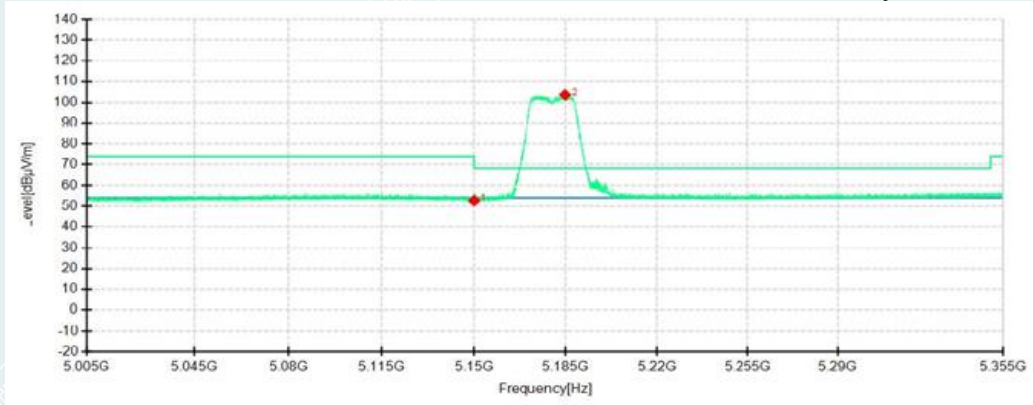

Detector mode: Peak

Polarity: Vertical

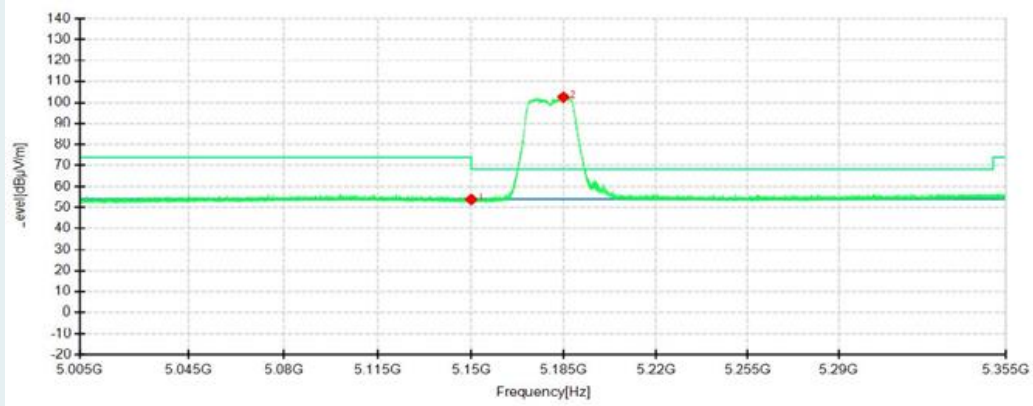


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	38.85	52.62	13.77	68.30	15.68	200	31	Horizontal	/
2	5184.7950	89.04	103.66	14.62	68.30	-35.36	200	24	Horizontal	N/A
1	5150.0000	40.06	53.83	13.77	68.30	14.47	100	301	Vertical	/
2	5184.9350	87.98	102.60	14.62	68.30	-34.30	200	115	Vertical	N/A

802.11n HT20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

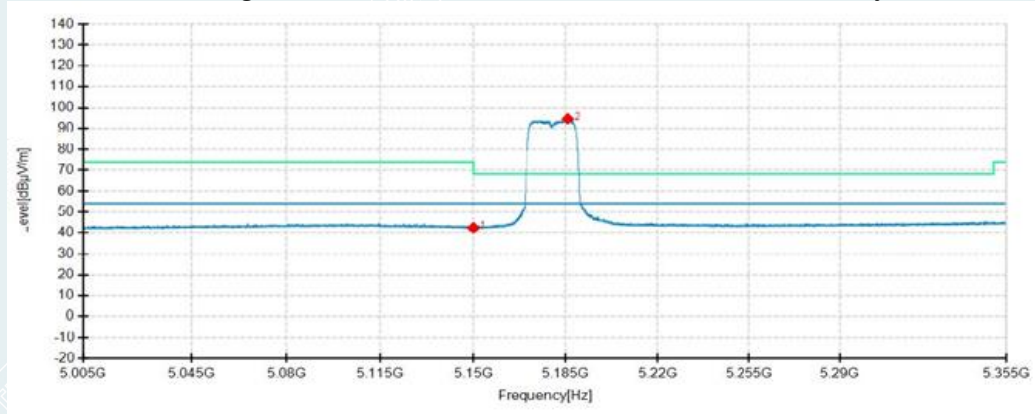

Detector mode: Average

Polarity: Vertical

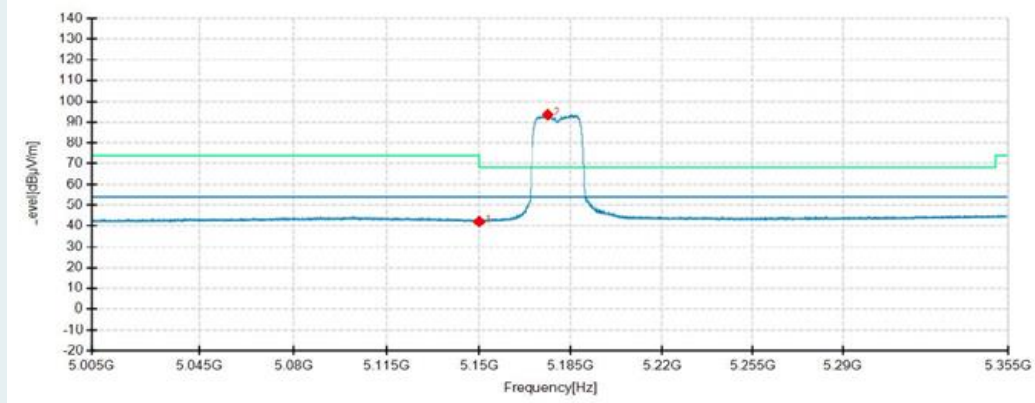


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	28.57	42.34	13.77	54.00	11.66	200	73	Horizontal	/
2	5185.8450	79.89	94.53	14.64	54.00	-40.53	200	18	Horizontal	N/A
1	5150.0000	28.27	42.04	13.77	54.00	11.96	200	71	Vertical	/
2	5176.3250	79.20	93.61	14.41	54.00	-39.61	200	120	Vertical	N/A

802.11n HT20 mode/5200MHz


Detector mode: Peak

Polarity: Horizontal

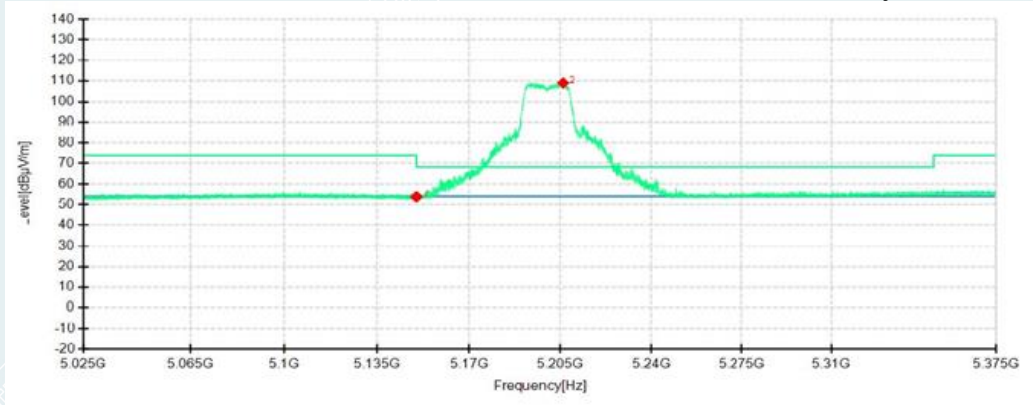

Detector mode: Peak

Polarity: Vertical

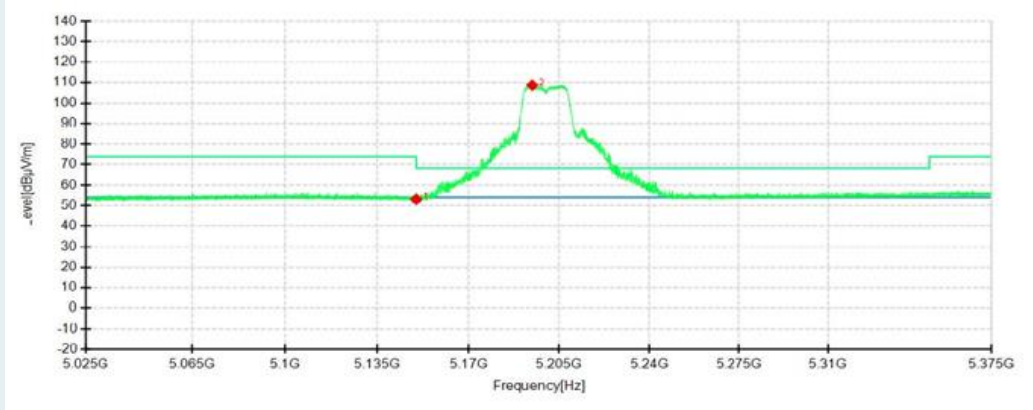


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	40.03	53.80	13.77	68.30	14.50	100	220	Horizontal	/
2	5206.1250	94.16	109.05	14.89	68.30	-40.75	200	22	Horizontal	N/A
1	5150.0000	39.27	53.04	13.77	68.30	15.26	200	58	Vertical	/
2	5194.7150	93.90	108.76	14.86	68.30	-40.46	200	114	Vertical	N/A

802.11n HT20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

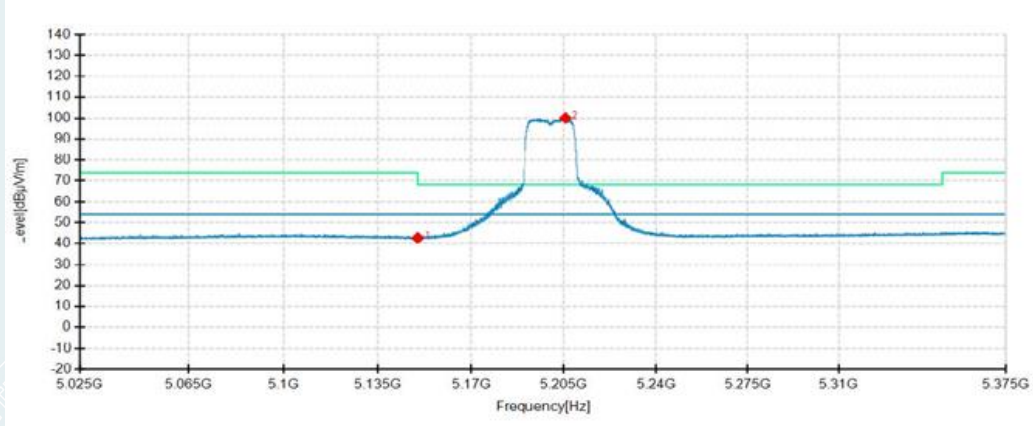

Detector mode: Average

Polarity: Vertical

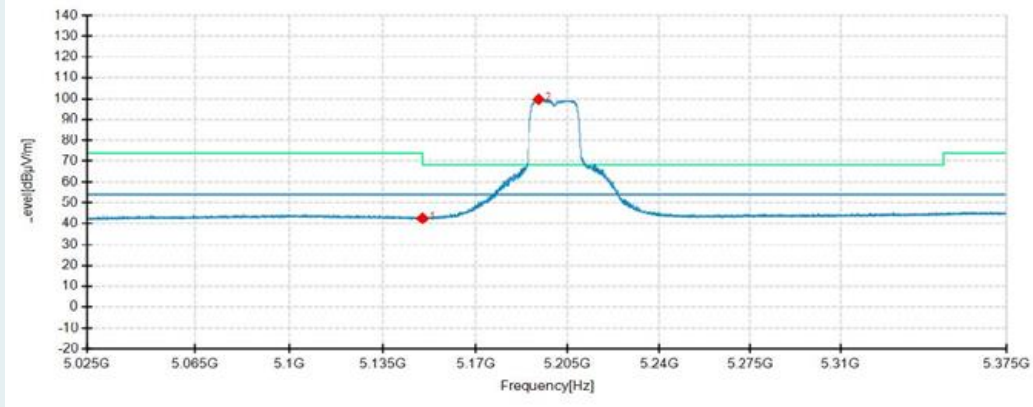


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	28.88	42.65	13.77	54.00	11.35	200	218	Horizontal	/
2	5205.7050	85.09	99.99	14.90	54.00	-45.99	200	25	Horizontal	N/A
1	5150.0000	28.72	42.49	13.77	54.00	11.51	200	101	Vertical	/
2	5194.0850	84.79	99.64	14.85	54.00	-45.64	200	108	Vertical	N/A

802.11n HT20 mode/5240MHz


Detector mode: Peak

Polarity: Horizontal

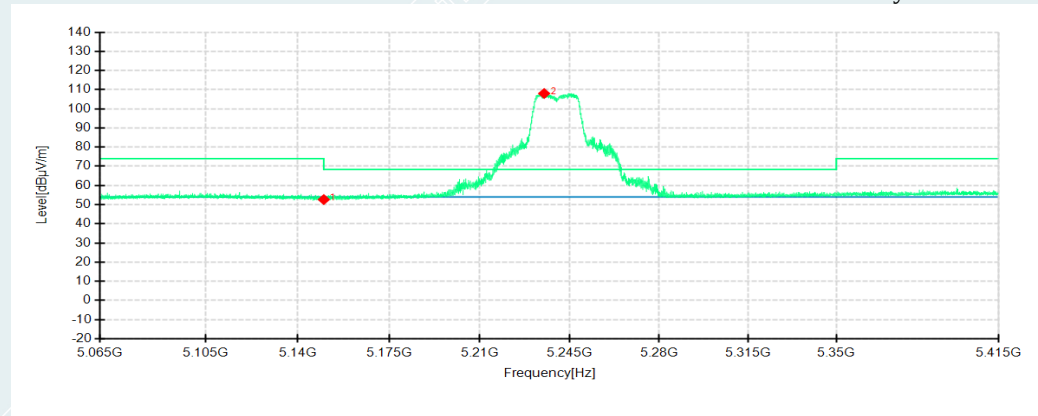

Detector mode: Peak

Polarity: Vertical

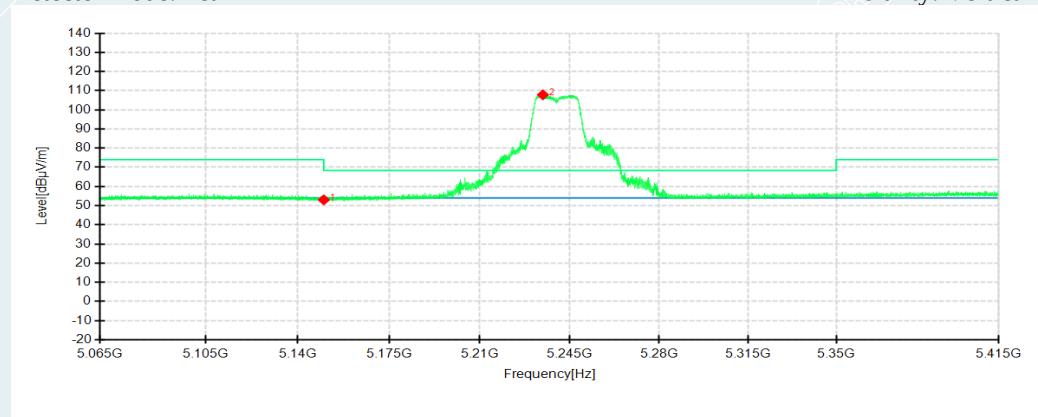


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	38.88	52.65	13.77	68.30	15.65	100	142	Horizontal	/
2	5235.0650	93.57	107.99	14.42	68.30	-39.69	200	19	Horizontal	N/A
1	5150.0000	39.24	53.01	13.77	68.30	15.29	200	86	Vertical	/
2	5234.5750	93.39	107.82	14.43	68.30	-39.52	200	114	Vertical	N/A

802.11n HT20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

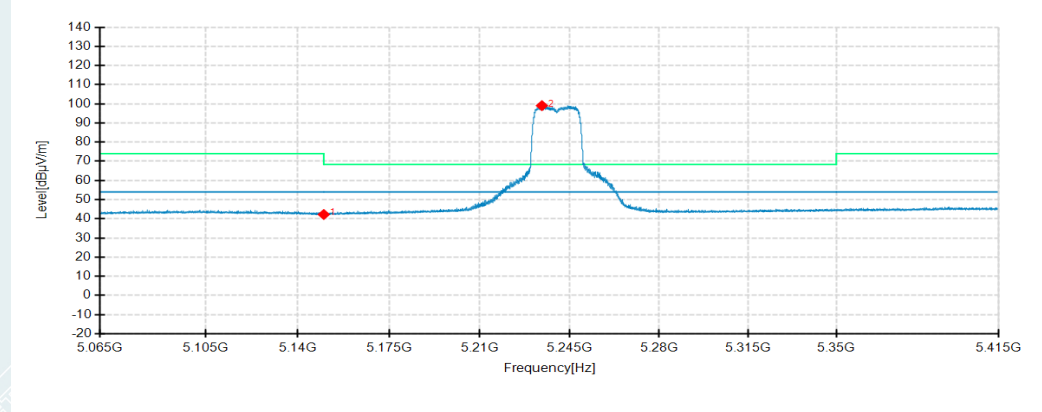

Detector mode: Average

Polarity: Vertical

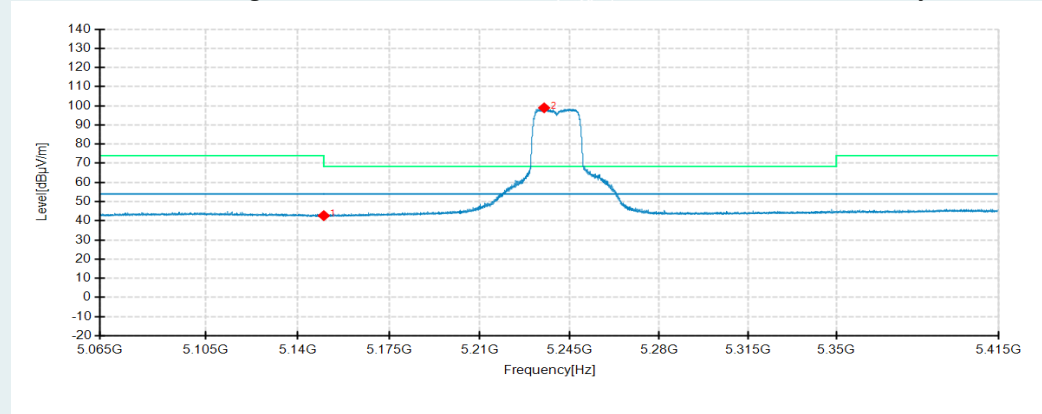


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	28.45	42.22	13.77	54.00	11.78	100	142	Horizontal	/
2	5234.1900	84.59	99.03	14.44	54.00	-45.03	200	25	Horizontal	N/A
1	5150.0000	28.91	42.68	13.77	54.00	11.32	100	252	Vertical	/
2	5235.0650	84.51	98.93	14.42	54.00	-44.93	200	114	Vertical	N/A

802.11n HT20 mode/5260MHz


Detector mode: Peak

Polarity: Horizontal

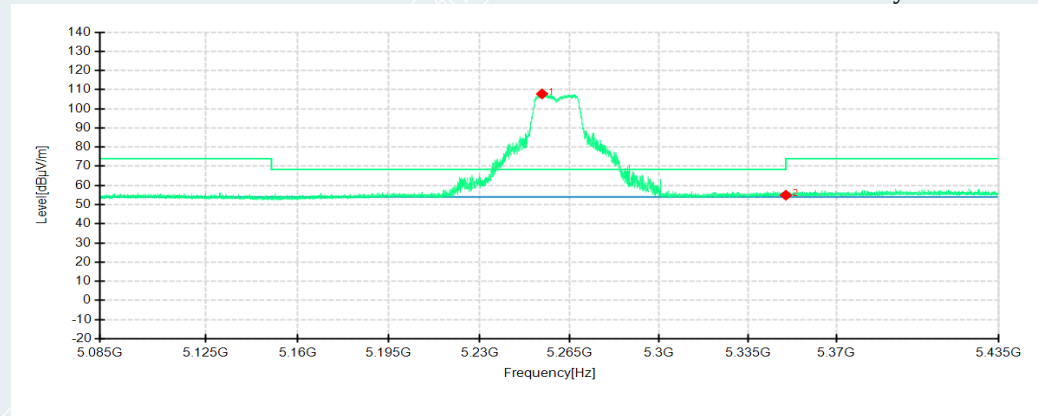

Detector mode: Peak

Polarity: Vertical

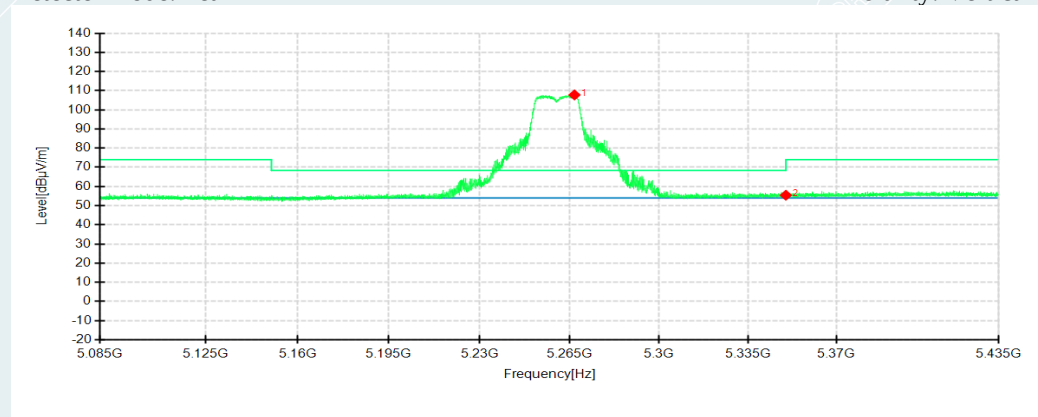


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5254.2600	93.58	107.77	14.19	68.30	-39.47	200	18	Horizontal	N/A
2	5350.0000	39.89	54.91	15.02	74.00	19.09	100	142	Horizontal	/
1	5266.8950	93.53	107.76	14.23	68.30	-39.46	200	101	Vertical	N/A
2	5350.0000	40.41	55.43	15.02	74.00	18.57	200	2	Vertical	/

802.11n HT20 mode/5260MHz


Detector mode: Average

Polarity: Horizontal

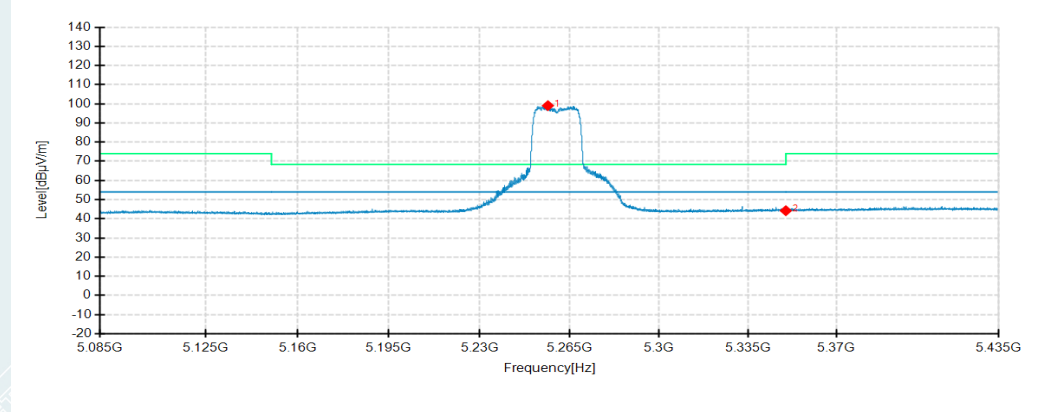

Detector mode: Average

Polarity: Vertical

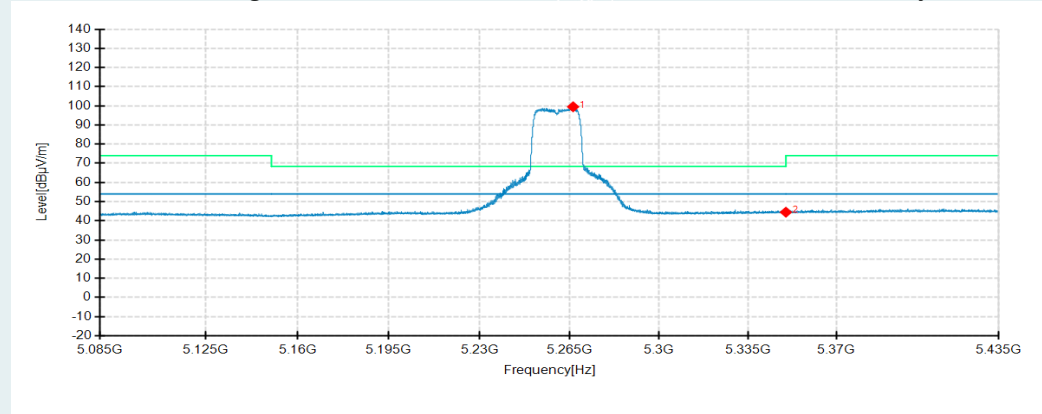


No.	Frequency MHz	Reading dBuV/m	Level dBuV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5256.5350	84.82	99.02	14.20	54.00	-45.02	200	25	Horizontal	N/A
2	5350.0000	29.19	44.21	15.02	54.00	9.79	200	19	Horizontal	/
1	5266.3700	85.25	99.48	14.23	54.00	-45.48	200	115	Vertical	N/A
2	5350.0000	29.47	44.49	15.02	54.00	9.51	100	142	Vertical	/

802.11n HT20 mode/5300MHz


Detector mode: Peak

Polarity: Horizontal

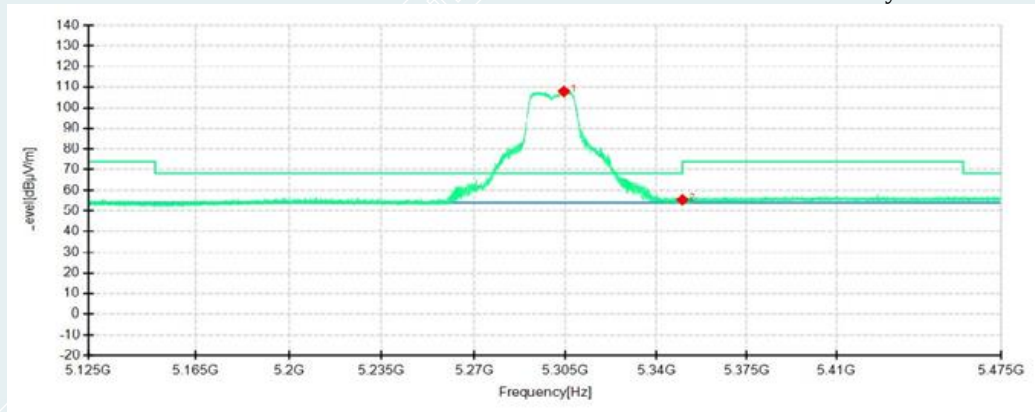

Detector mode: Peak

Polarity: Vertical

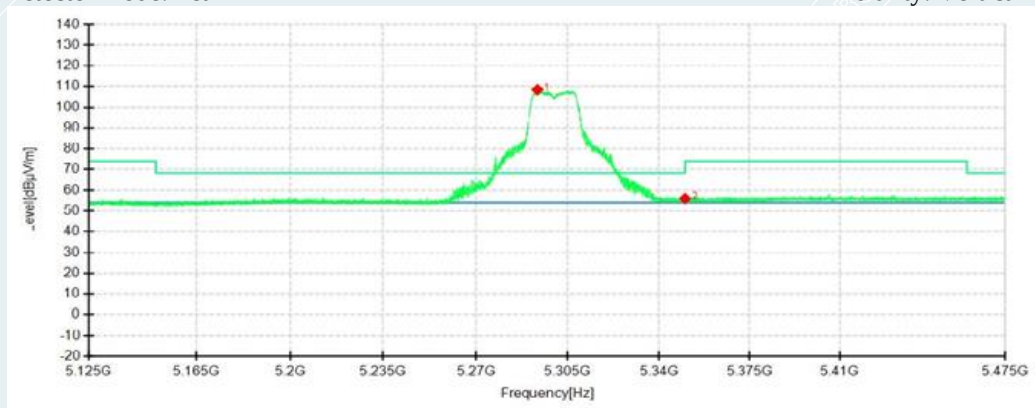


No.	Frequency MHz	Reading dB μ V/m	Level dB μ V/m	Factor dB	Limit dB μ V/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5304.5500	93.57	107.96	14.39	68.30	-39.66	200	18	Horizontal	N/A
2	5350.0000	40.44	55.46	15.02	74.00	18.54	200	218	Horizontal	/
1	5293.6300	94.19	108.50	14.31	68.30	-40.20	200	115	Vertical	N/A
2	5350.0000	40.96	55.98	15.02	74.00	18.02	200	32	Vertical	/

802.11n HT20 mode/5300MHz


Detector mode: Average

Polarity: Horizontal

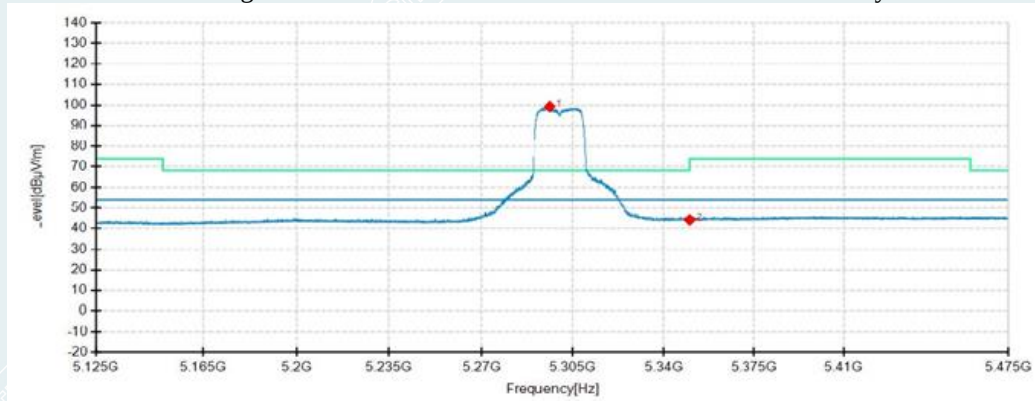

Detector mode: Average

Polarity: Vertical

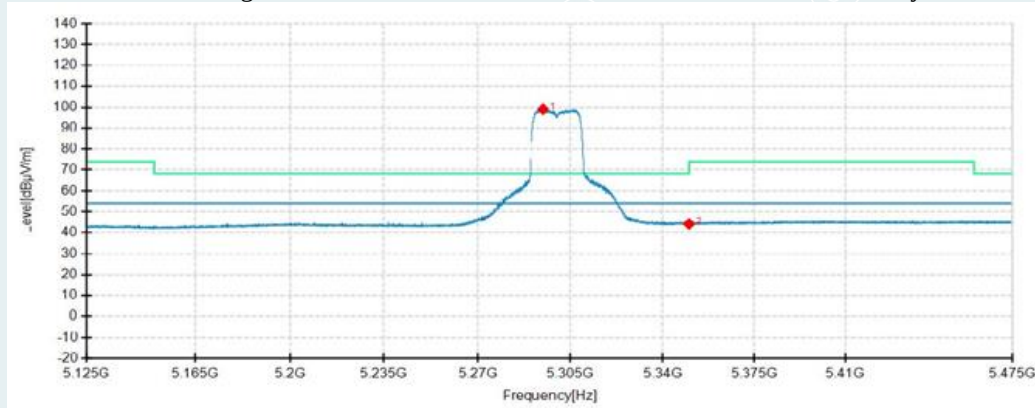


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5296.2900	84.86	99.18	14.32	54.00	-45.18	200	17	Horizontal	N/A
2	5350.0000	29.26	44.28	15.02	54.00	9.72	200	218	Horizontal	/
1	5294.8200	84.72	99.03	14.31	54.00	-45.03	200	115	Vertical	N/A
2	5350.0000	29.22	44.24	15.02	54.00	9.76	200	218	Vertical	/

802.11n HT20 mode/5320MHz


Detector mode: Peak

Polarity: Horizontal

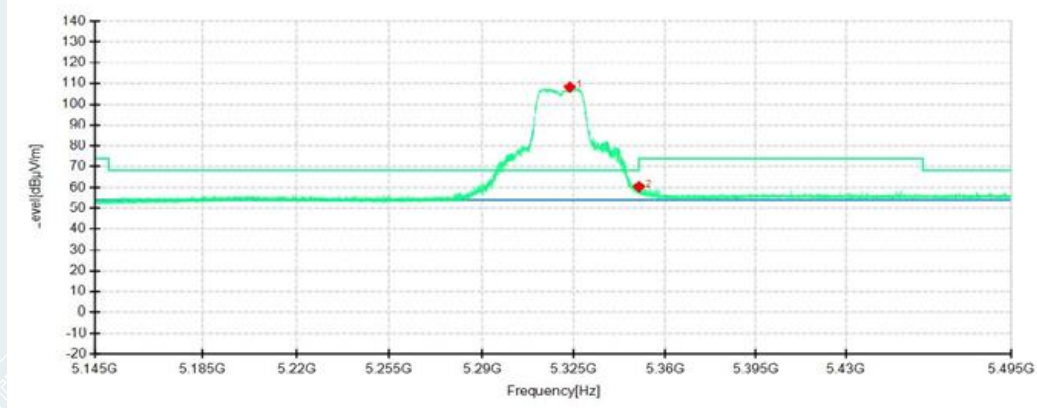

Detector mode: Peak

Polarity: Vertical

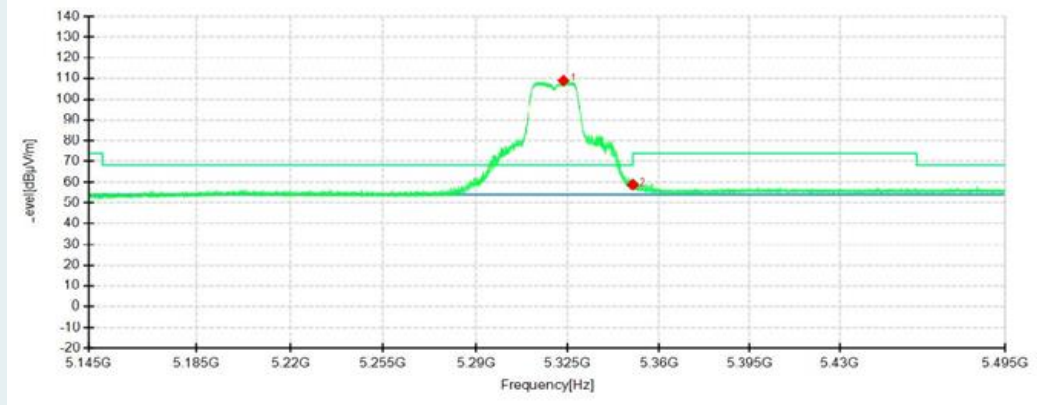


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5323.6050	93.66	108.32	14.66	68.30	-40.02	200	218	Horizontal	N/A
2	5350.0000	45.42	60.44	15.02	74.00	13.56	200	218	Horizontal	/
1	5323.5350	94.34	108.99	14.65	68.30	-40.69	200	113	Vertical	N/A
2	5350.0000	43.67	58.69	15.02	74.00	15.31	200	121	Vertical	/

802.11n HT20 mode/5320MHz


Detector mode: Average

Polarity: Horizontal

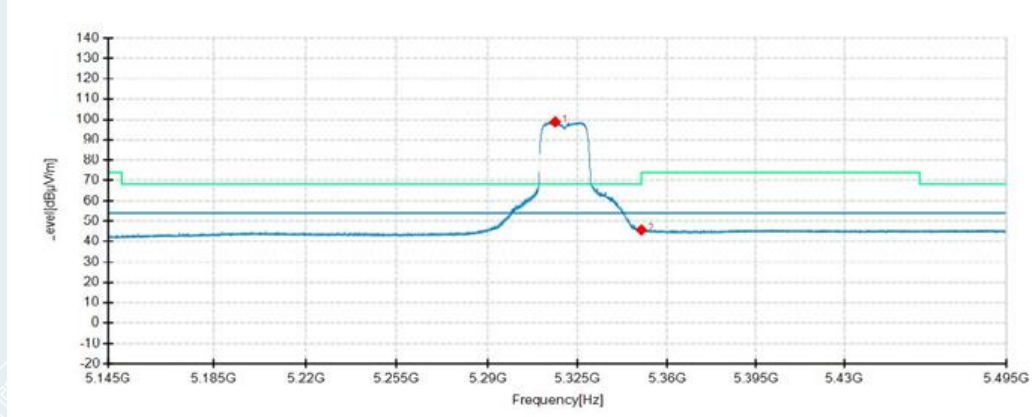

Detector mode: Average

Polarity: Vertical

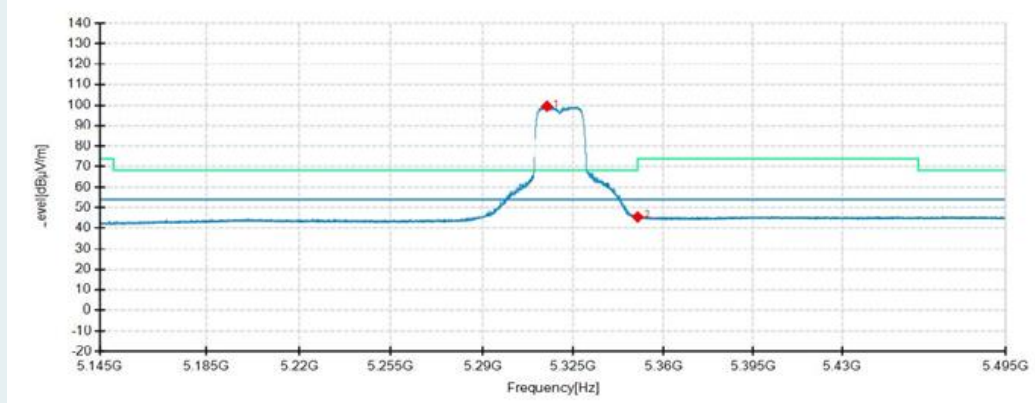


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5316.4300	84.22	98.78	14.56	54.00	-44.78	200	218	Horizontal	N/A
2	5350.0000	30.66	45.68	15.02	54.00	8.32	200	218	Horizontal	/
1	5315.0300	84.90	99.44	14.54	54.00	-45.44	200	115	Vertical	N/A
2	5350.0000	30.47	45.49	15.02	54.00	8.51	200	54	Vertical	/

802.11n HT20 mode/5500MHz


Detector mode: Peak

Polarity: Horizontal

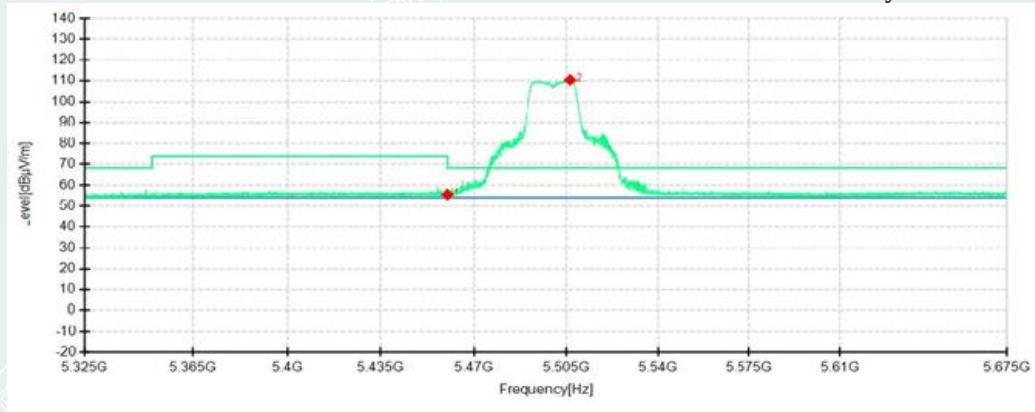

Detector mode: Peak

Polarity: Vertical

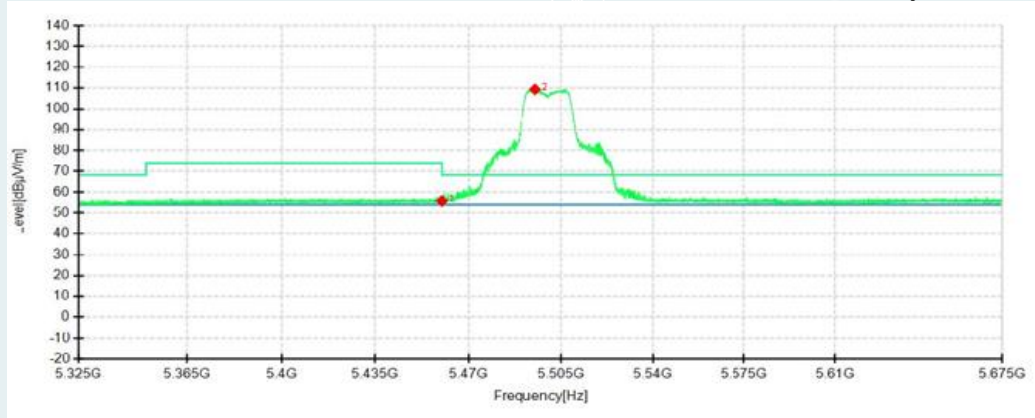


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	39.64	55.46	15.82	68.30	12.84	100	297	Horizontal	/
2	5506.5450	94.35	110.39	16.04	68.30	-42.09	200	218	Horizontal	N/A
1	5460.0000	39.93	55.75	15.82	68.30	12.55	100	142	Vertical	/
2	5495.3100	93.39	109.34	15.95	68.30	-41.04	200	100	Vertical	N/A

802.11n HT20 mode/5500MHz


Detector mode: Average

Polarity: Horizontal

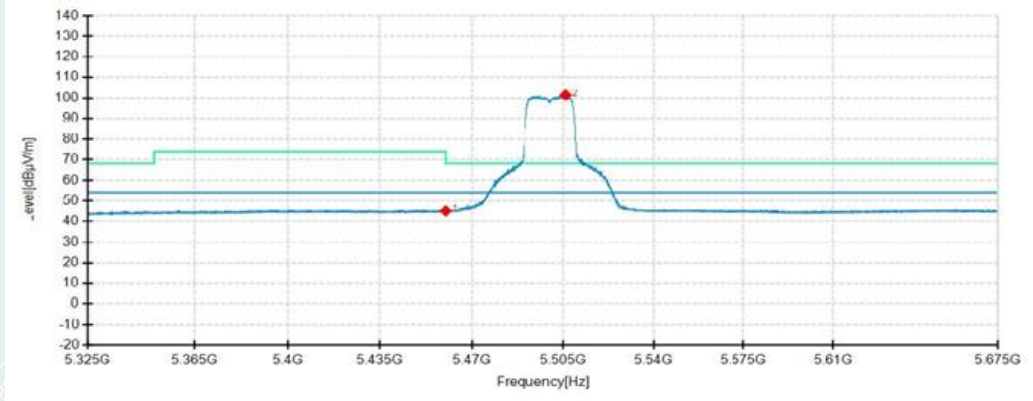

Detector mode: Average

Polarity: Vertical

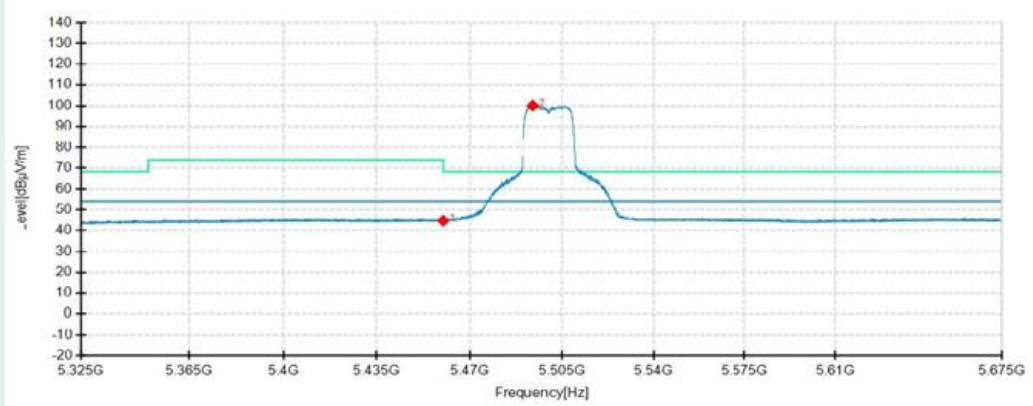


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	29.38	45.20	15.82	54.00	8.80	200	218	Horizontal	/
2	5506.0900	85.32	101.35	16.03	54.00	-47.35	200	218	Horizontal	N/A
1	5460.0000	29.01	44.83	15.82	54.00	9.17	200	218	Vertical	/
2	5494.0500	84.05	100.00	15.95	54.00	-46.00	200	115	Vertical	N/A

802.11n HT20 mode/5580MHz


Detector mode: Peak

Polarity: Horizontal

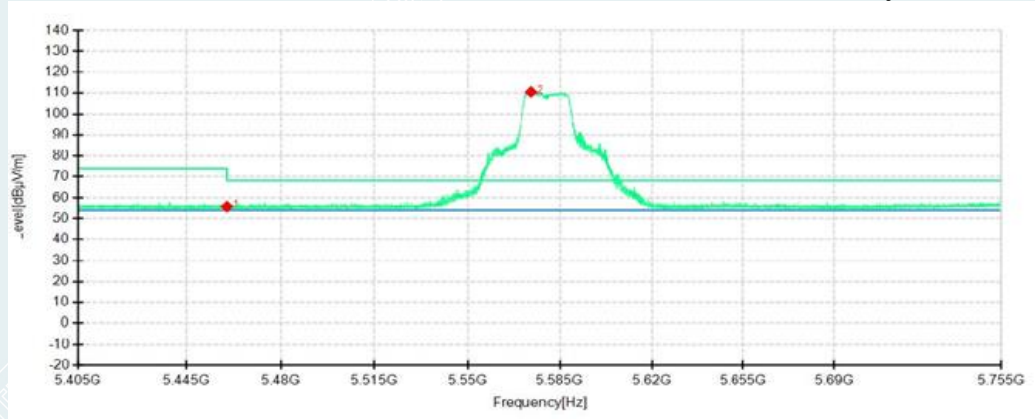

Detector mode: Peak

Polarity: Vertical

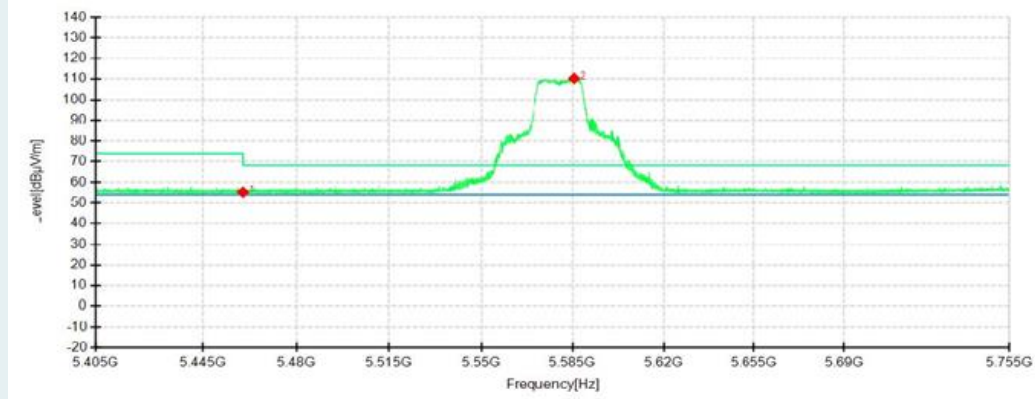


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	39.95	55.77	15.82	68.30	12.53	200	58	Horizontal	/
2	5574.1550	94.26	110.48	16.22	68.30	-42.18	200	218	Horizontal	N/A
1	5460.0000	39.43	55.25	15.82	68.30	13.05	200	99	Vertical	/
2	5585.6350	94.16	110.26	16.10	68.30	-41.96	200	29	Vertical	N/A

802.11n HT20 mode/5580MHz


Detector mode: Average

Polarity: Horizontal

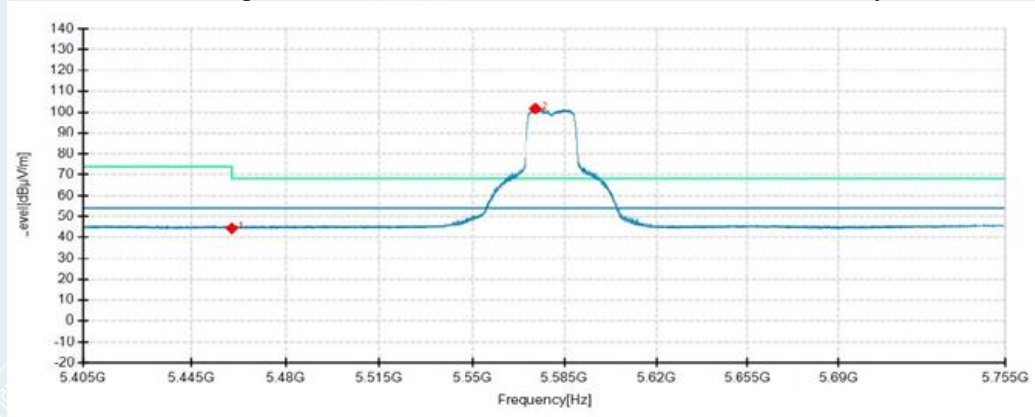

Detector mode: Average

Polarity: Vertical

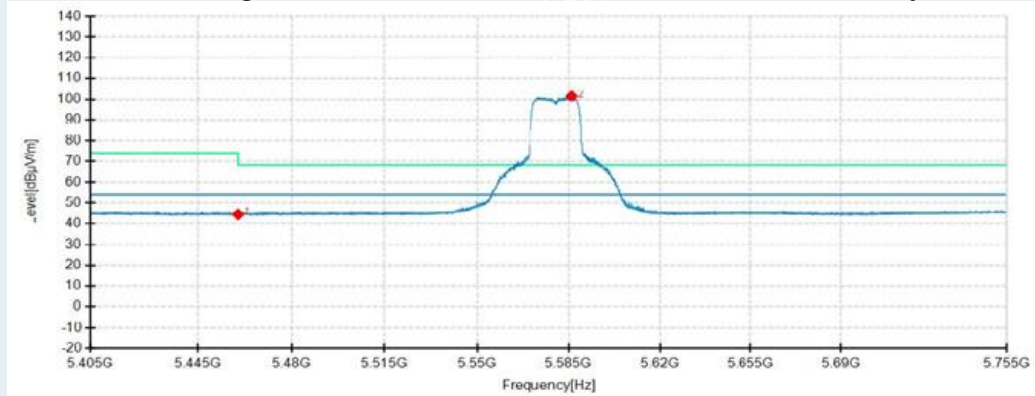


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5460.0000	28.59	44.41	15.82	54.00	9.59	200	1	Horizontal	/
2	5574.0150	85.41	101.63	16.22	54.00	-47.63	200	218	Horizontal	N/A
1	5460.0000	28.69	44.51	15.82	54.00	9.49	100	354	Vertical	/
2	5586.1600	85.35	101.44	16.09	54.00	-47.44	200	25	Vertical	N/A

802.11n HT20 mode/5700MHz


Detector mode: Peak

Polarity: Horizontal

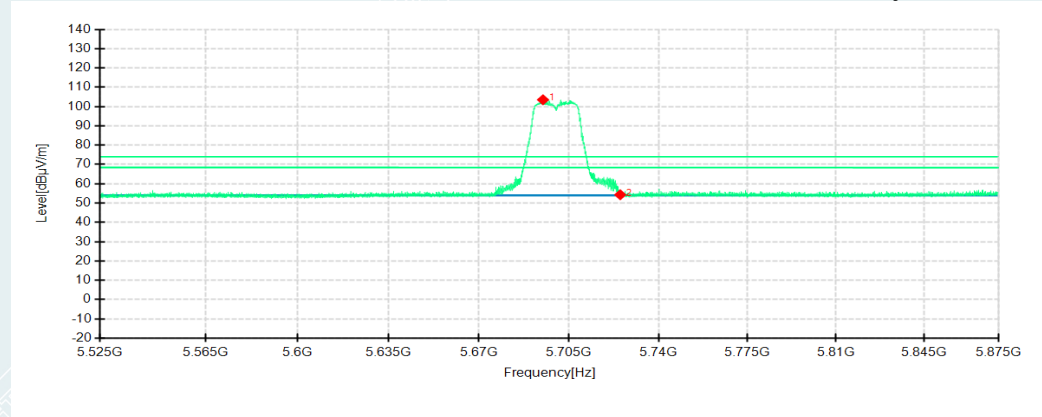

Detector mode: Peak

Polarity: Vertical

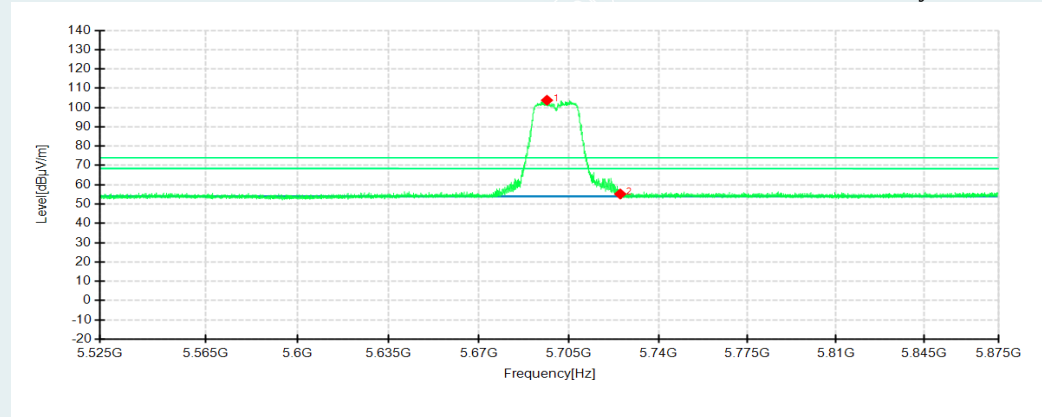


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5694.8550	87.13	103.51	16.38	68.30	-35.21	200	142	Horizontal	N/A
2	5725.0000	37.52	54.31	16.79	68.30	13.99	100	218	Horizontal	/
1	5696.3950	87.41	103.78	16.37	68.30	-35.48	200	66	Vertical	N/A
2	5725.0000	38.42	55.21	16.79	68.30	13.09	200	73	Vertical	/

802.11n HT20 mode/5700MHz


Detector mode: Average

Polarity: Horizontal

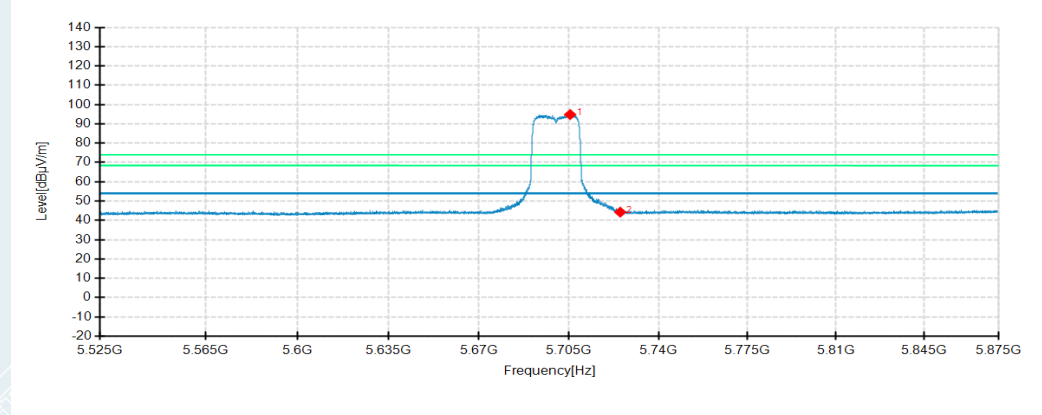

Detector mode: Average

Polarity: Vertical

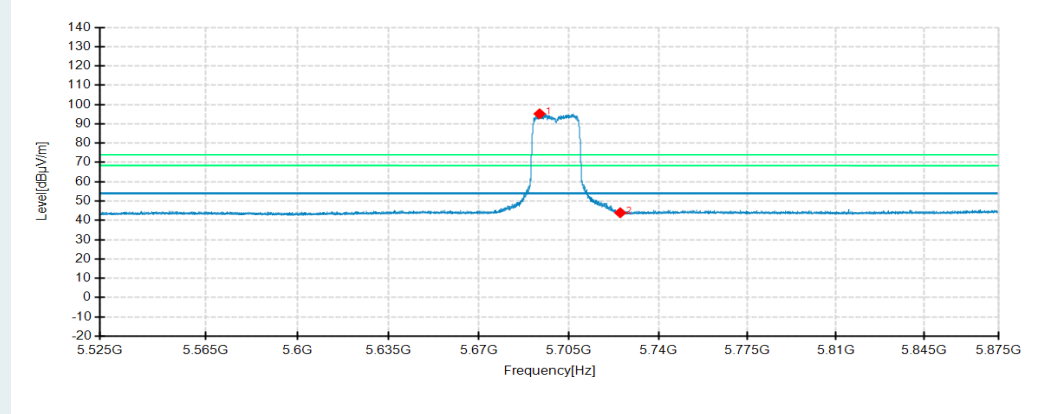


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5705.4250	78.38	94.81	16.43	54.00	-40.81	200	349	Horizontal	N/A
2	5725.0000	27.48	44.27	16.79	54.00	9.73	100	218	Horizontal	/
1	5693.5250	78.81	95.20	16.39	54.00	-41.20	200	62	Vertical	N/A
2	5725.0000	27.15	43.94	16.79	54.00	10.06	200	75	Vertical	/

802.11n HT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

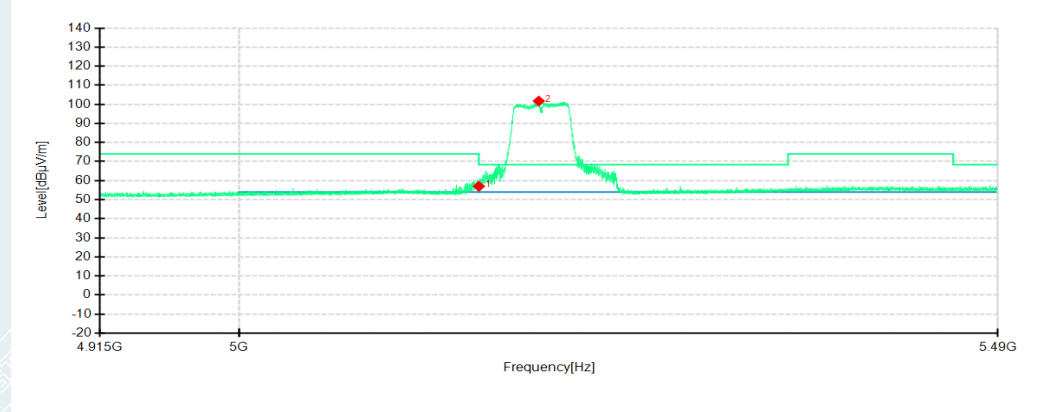

Detector mode: Peak

Polarity: Vertical

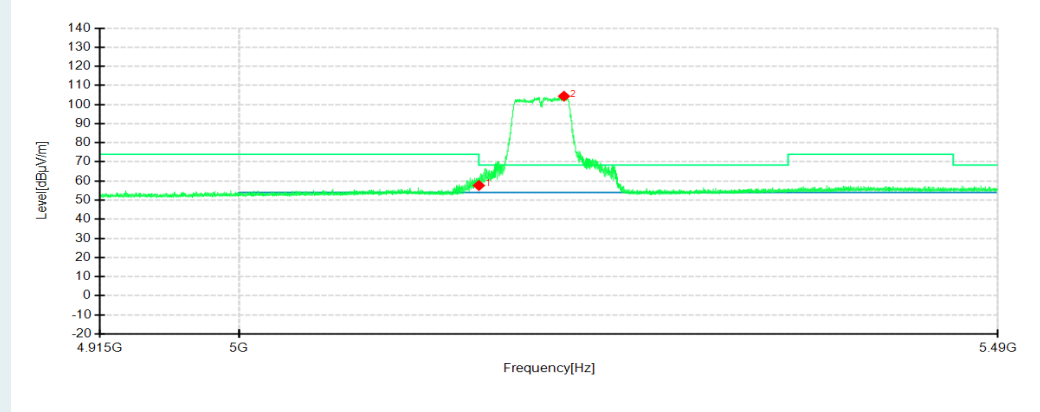


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	43.23	57.00	13.77	68.30	11.30	200	53	Horizontal	/
2	5188.1250	87.00	101.70	14.70	68.30	-33.40	100	142	Horizontal	N/A
1	5150.0000	43.90	57.67	13.77	68.30	10.63	100	142	Vertical	/
2	5204.2825	89.44	104.36	14.92	68.30	-36.06	200	115	Vertical	N/A

802.11n HT40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

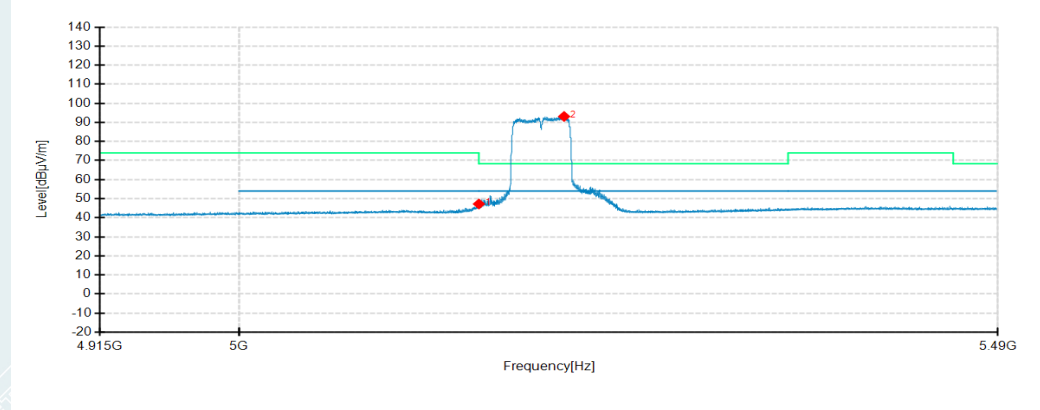

Detector mode: Average

Polarity: Vertical

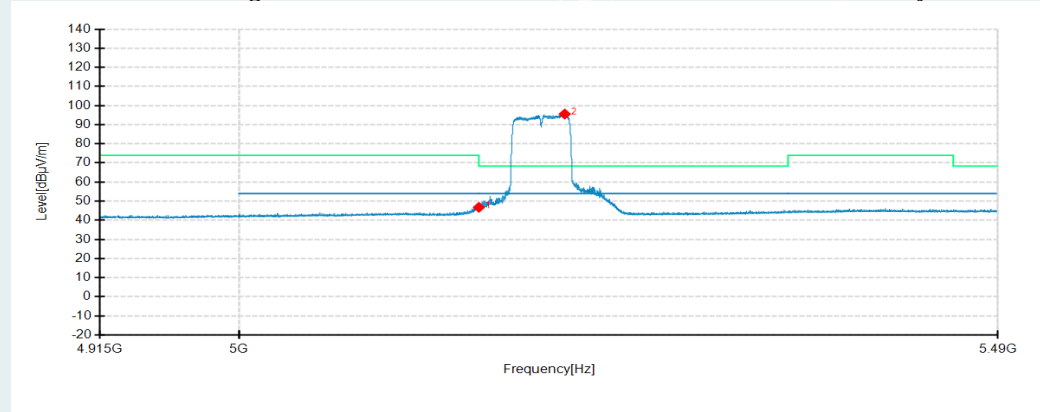


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	33.42	47.19	13.77	54.00	6.81	100	142	Horizontal	/
2	5204.3400	78.18	93.10	14.92	54.00	-39.10	100	142	Horizontal	N/A
1	5150.0000	32.98	46.75	13.77	54.00	7.25	200	121	Vertical	/
2	5204.7425	80.66	95.57	14.91	54.00	-41.57	200	121	Vertical	N/A

802.11n HT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

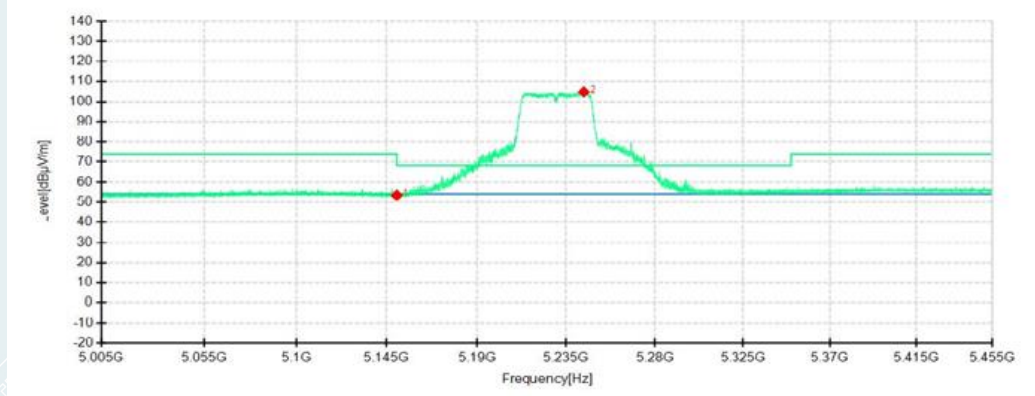

Detector mode: Peak

Polarity: Vertical

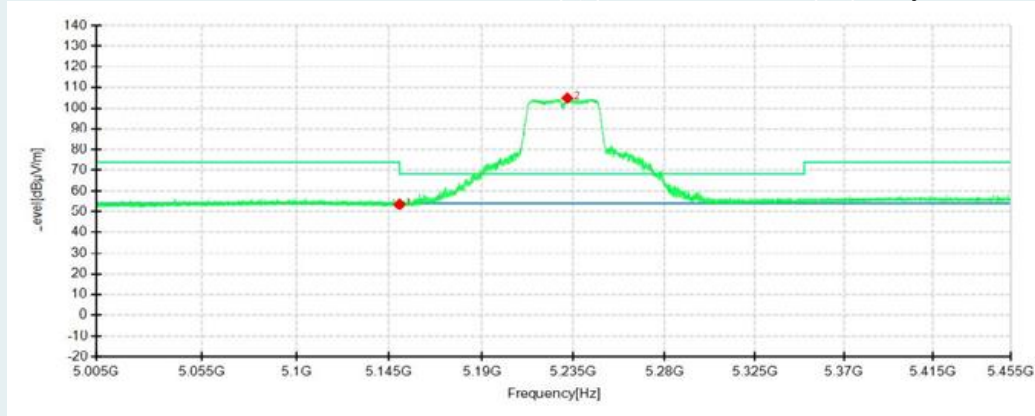


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	39.55	53.32	13.77	68.30	14.98	100	314	Horizontal	/
2	5243.9050	90.48	104.76	14.28	68.30	-36.46	200	19	Horizontal	N/A
1	5150.0000	39.66	53.43	13.77	68.30	14.87	200	39	Vertical	/
2	5232.0700	90.31	104.78	14.47	68.30	-36.48	200	101	Vertical	N/A

802.11n HT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

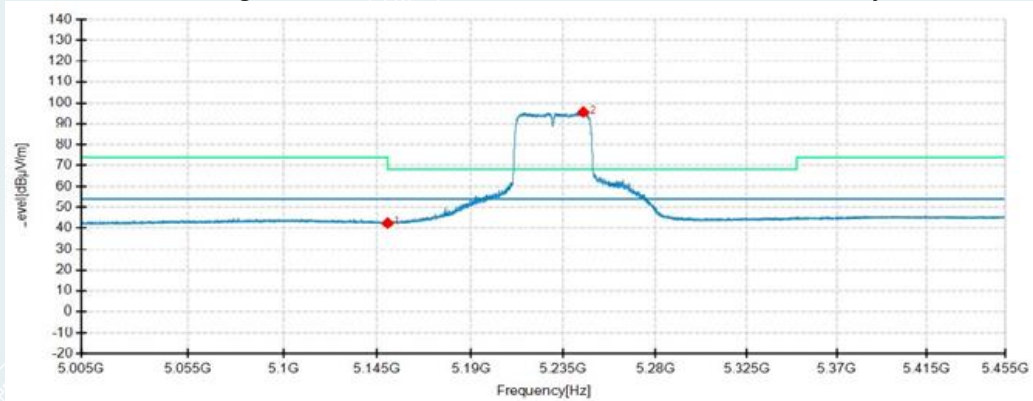

Detector mode: Average

Polarity: Vertical

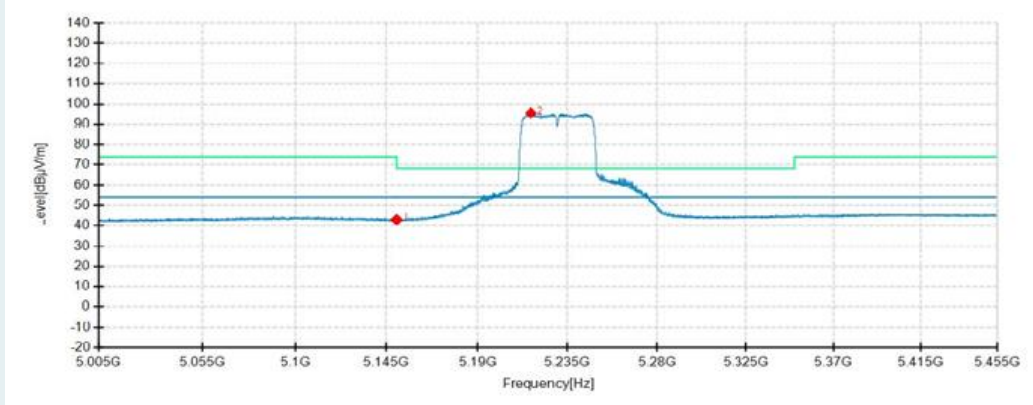


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5150.0000	28.57	42.34	13.77	54.00	11.66	100	142	Horizontal	/
2	5244.7600	81.22	95.48	14.26	54.00	-41.48	200	25	Horizontal	N/A
1	5150.0000	29.14	42.91	13.77	54.00	11.09	200	19	Vertical	/
2	5216.5900	80.74	95.46	14.72	54.00	-41.46	200	101	Vertical	N/A

802.11n HT40 mode/5270MHz


Detector mode: Peak

Polarity: Horizontal

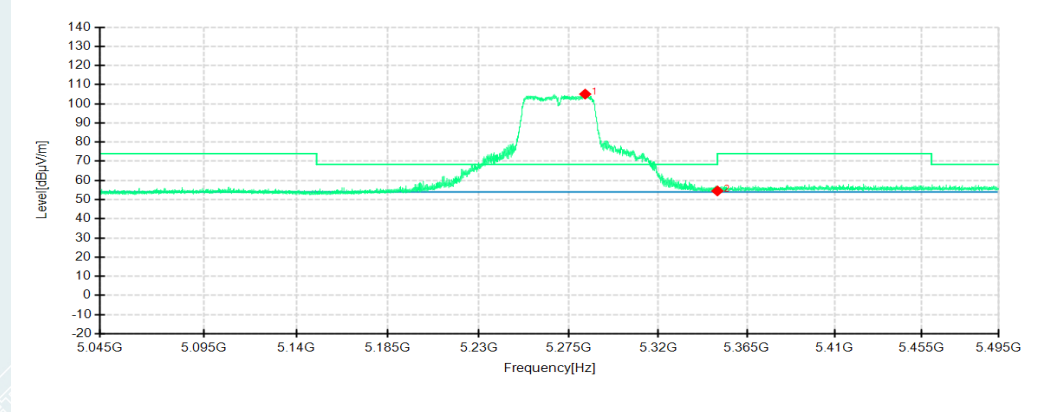

Detector mode: Peak

Polarity: Vertical

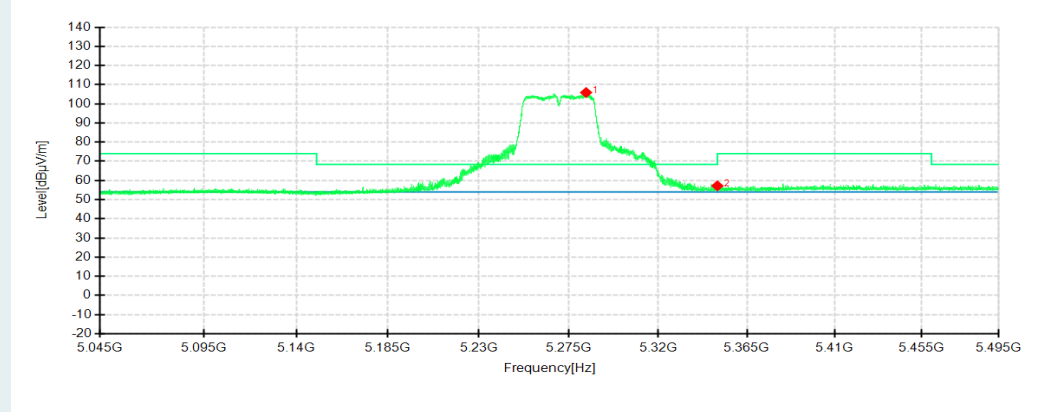


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5283.1850	90.78	105.06	14.28	68.30	-36.76	200	18	Horizontal	N/A
2	5350.0000	39.52	54.54	15.02	74.00	19.46	100	142	Horizontal	/
1	5283.6350	91.60	105.88	14.28	68.30	-37.58	200	114	Vertical	N/A
2	5350.0000	42.16	57.18	15.02	74.00	16.82	200	101	Vertical	/

802.11n HT40 mode/5270MHz


Detector mode: Average

Polarity: Horizontal

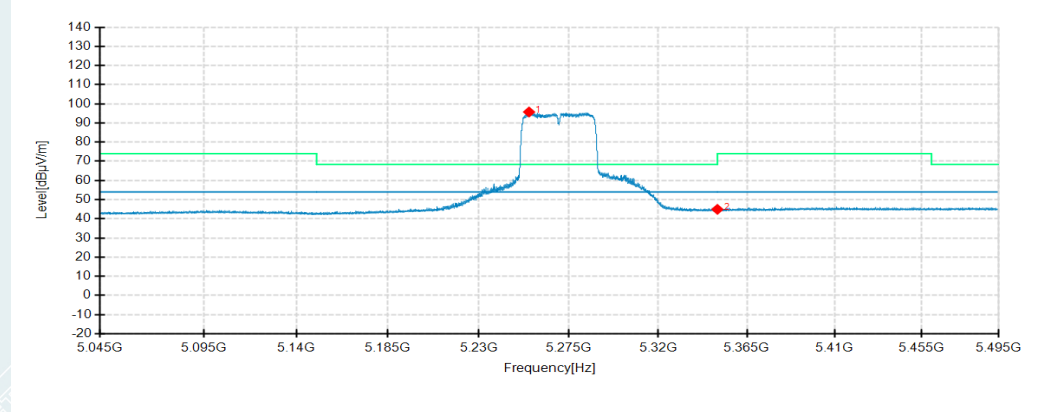

Detector mode: Average

Polarity: Vertical

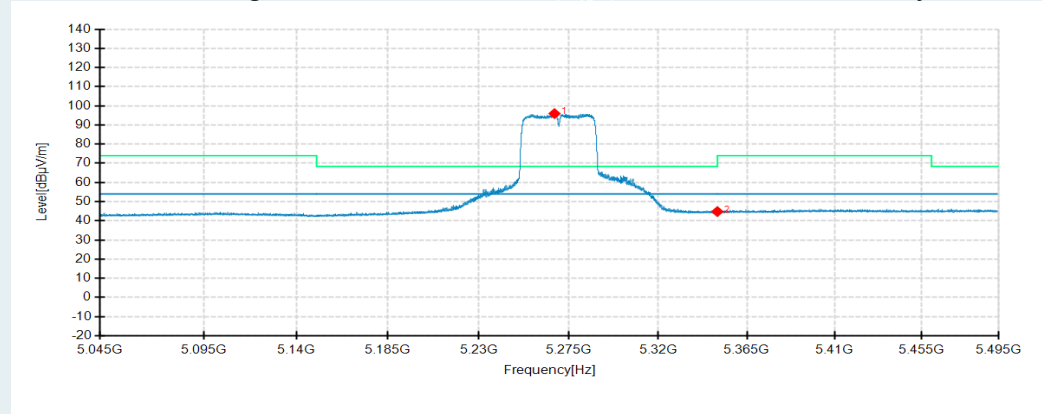

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5255.0600	81.54	95.74	14.20	54.00	-41.74	200	19	Horizontal	N/A
2	5350.0000	29.90	44.92	15.02	54.00	9.08	200	218	Horizontal	/
1	5267.7950	81.70	95.93	14.23	54.00	-41.93	200	115	Vertical	N/A
2	5350.0000	29.78	44.80	15.02	54.00	9.20	200	218	Vertical	/