



|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT80 | Channel:      | 5210    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

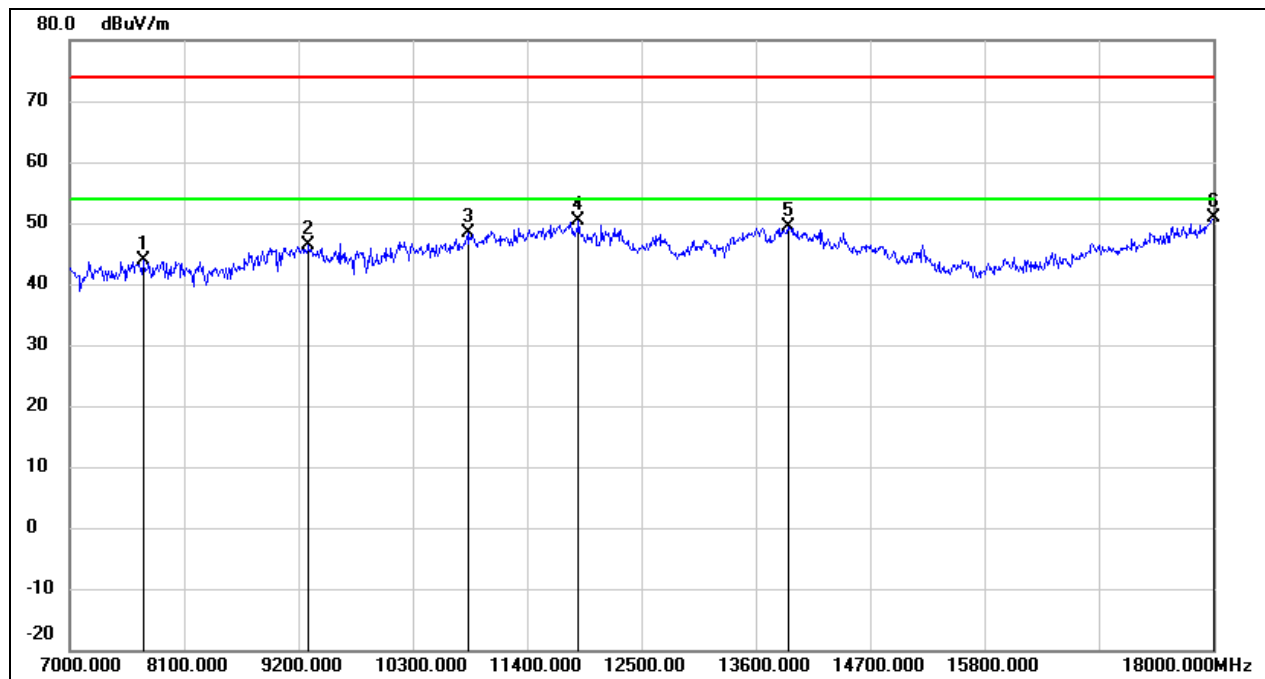


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7704.000        | 37.17          | 6.69           | 43.86           | 74.00          | -30.14      | peak   |
| 2   | 9299.000        | 35.86          | 10.53          | 46.39           | 74.00          | -27.61      | peak   |
| 3   | 10839.000       | 34.33          | 14.10          | 48.43           | 74.00          | -25.57      | peak   |
| 4   | 11895.000       | 32.91          | 17.51          | 50.42           | 74.00          | -23.58      | peak   |
| 5   | 13908.000       | 27.72          | 21.66          | 49.38           | 74.00          | -24.62      | peak   |
| 6   | 18000.000       | 24.73          | 26.12          | 50.85           | 74.00          | -23.15      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT80 | Channel:      | 5775    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

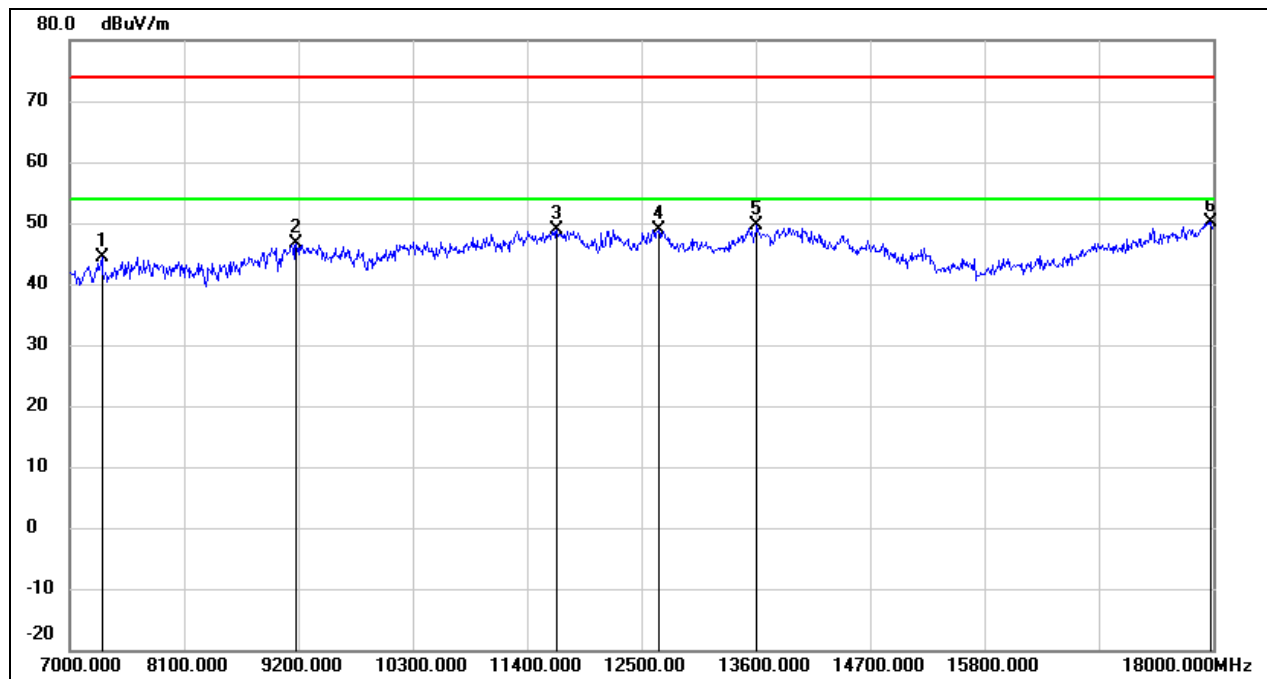

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7308.000        | 37.47          | 6.94           | 44.41           | 74.00          | -29.59      | peak   |
| 2   | 9178.000        | 36.24          | 10.45          | 46.69           | 74.00          | -27.31      | peak   |
| 3   | 11686.000       | 31.79          | 17.12          | 48.91           | 74.00          | -25.09      | peak   |
| 4   | 12665.000       | 30.95          | 18.04          | 48.99           | 74.00          | -25.01      | peak   |
| 5   | 13611.000       | 28.62          | 20.92          | 49.54           | 74.00          | -24.46      | peak   |
| 6   | 17978.000       | 24.19          | 25.97          | 50.16           | 74.00          | -23.84      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT80 | Channel:      | 5775    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

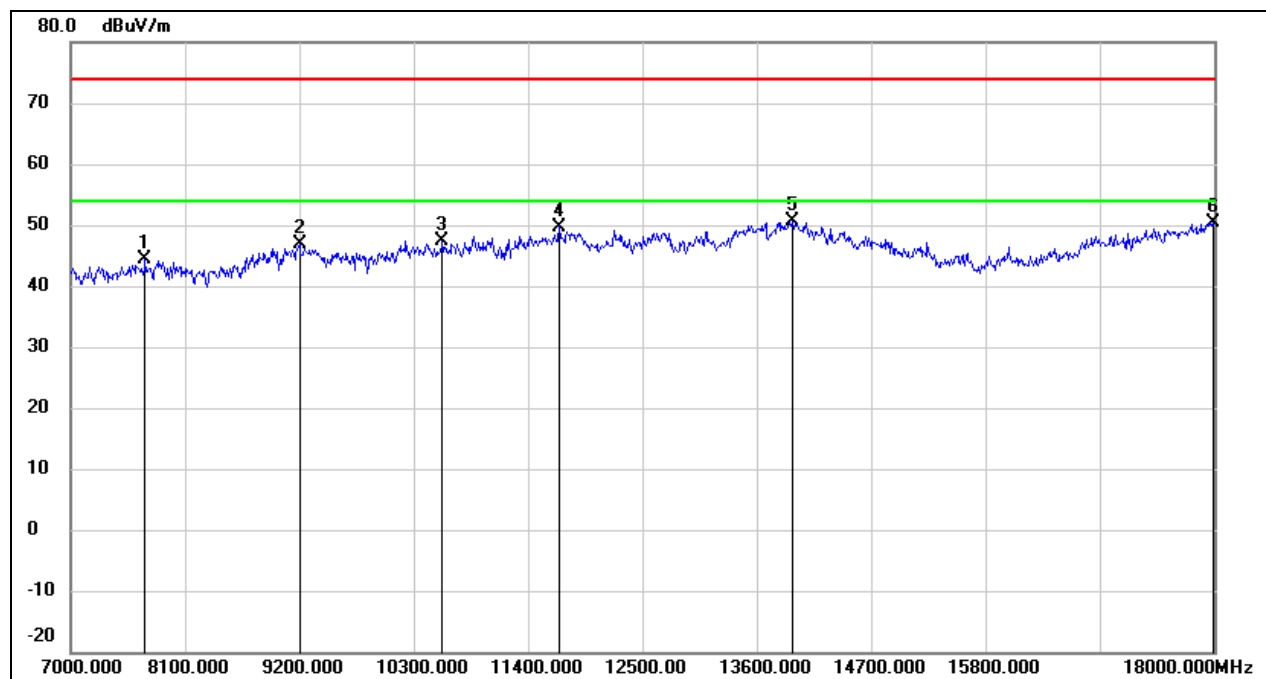


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7715.000        | 37.69          | 6.68           | 44.37           | 74.00          | -29.63      | peak   |
| 2   | 9200.000        | 36.50          | 10.46          | 46.96           | 74.00          | -27.04      | peak   |
| 3   | 10575.000       | 34.34          | 13.10          | 47.44           | 74.00          | -26.56      | peak   |
| 4   | 11697.000       | 32.62          | 17.13          | 49.75           | 74.00          | -24.25      | peak   |
| 5   | 13941.000       | 28.91          | 21.73          | 50.64           | 74.00          | -23.36      | peak   |
| 6   | 17989.000       | 24.45          | 26.04          | 50.49           | 74.00          | -23.51      | peak   |

## 8.6. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)


For ISED UNII-1 test data:

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

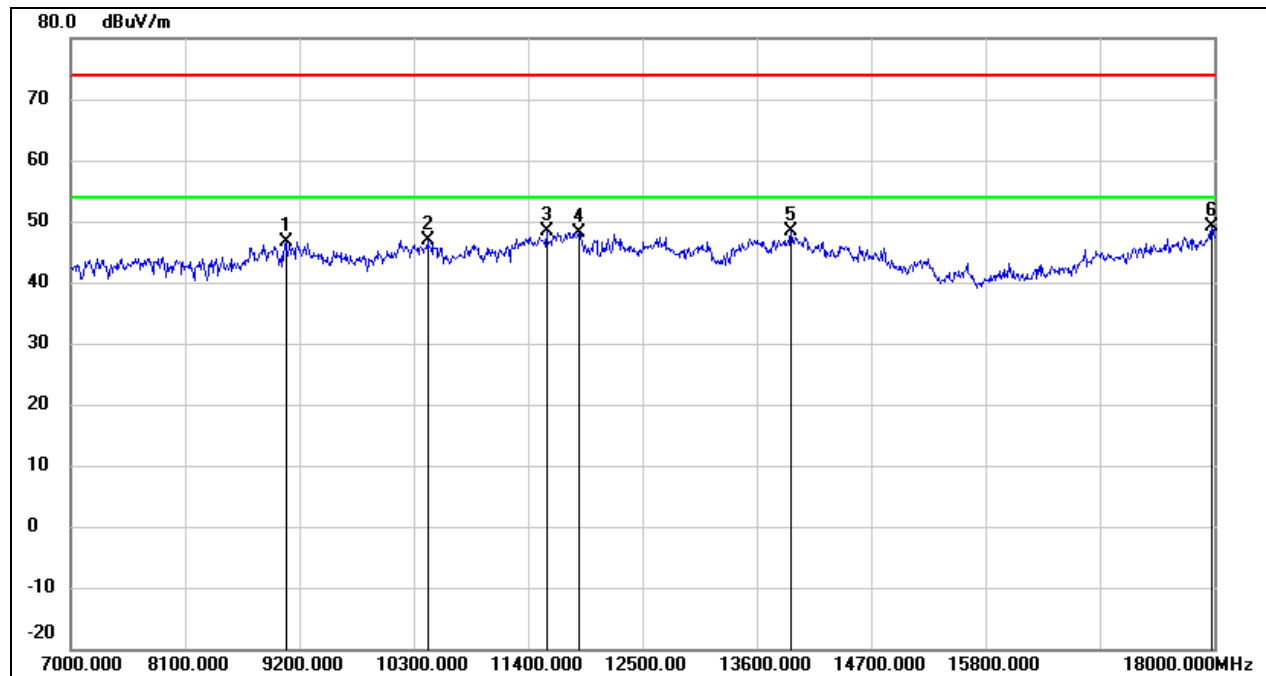


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9068.000           | 36.23             | 10.39             | 46.62              | 74.00             | -27.38         | peak   |
| 2   | 10432.000          | 34.30             | 12.67             | 46.97              | 74.00             | -27.03         | peak   |
| 3   | 11576.000          | 31.38             | 16.91             | 48.29              | 74.00             | -25.71         | peak   |
| 4   | 11884.000          | 30.74             | 17.48             | 48.22              | 74.00             | -25.78         | peak   |
| 5   | 13930.000          | 26.55             | 21.71             | 48.26              | 74.00             | -25.74         | peak   |
| 6   | 17978.000          | 23.12             | 25.97             | 49.09              | 74.00             | -24.91         | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

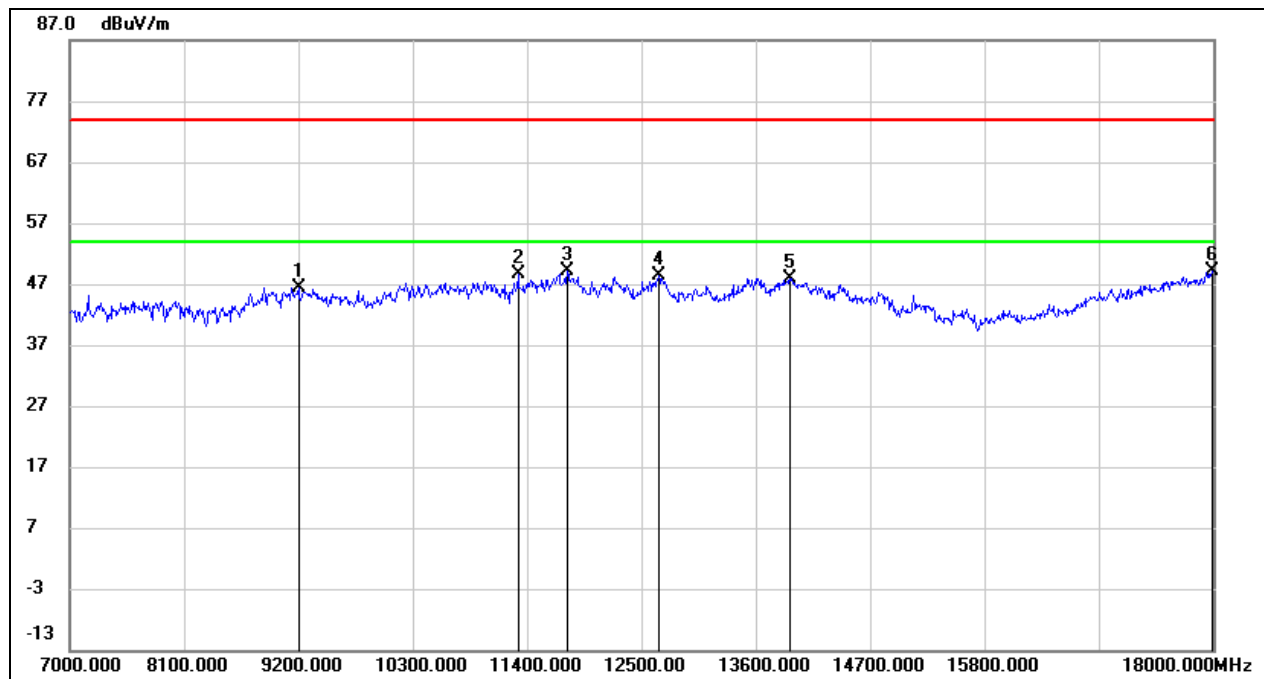


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9200.000        | 36.02          | 10.46          | 46.48           | 74.00          | -27.52      | peak   |
| 2   | 11312.000       | 32.56          | 16.00          | 48.56           | 74.00          | -25.44      | peak   |
| 3   | 11785.000       | 31.71          | 17.30          | 49.01           | 74.00          | -24.99      | peak   |
| 4   | 12665.000       | 30.44          | 18.04          | 48.48           | 74.00          | -25.52      | peak   |
| 5   | 13930.000       | 26.27          | 21.71          | 47.98           | 74.00          | -26.02      | peak   |
| 6   | 17989.000       | 23.06          | 26.04          | 49.10           | 74.00          | -24.90      | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5200    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

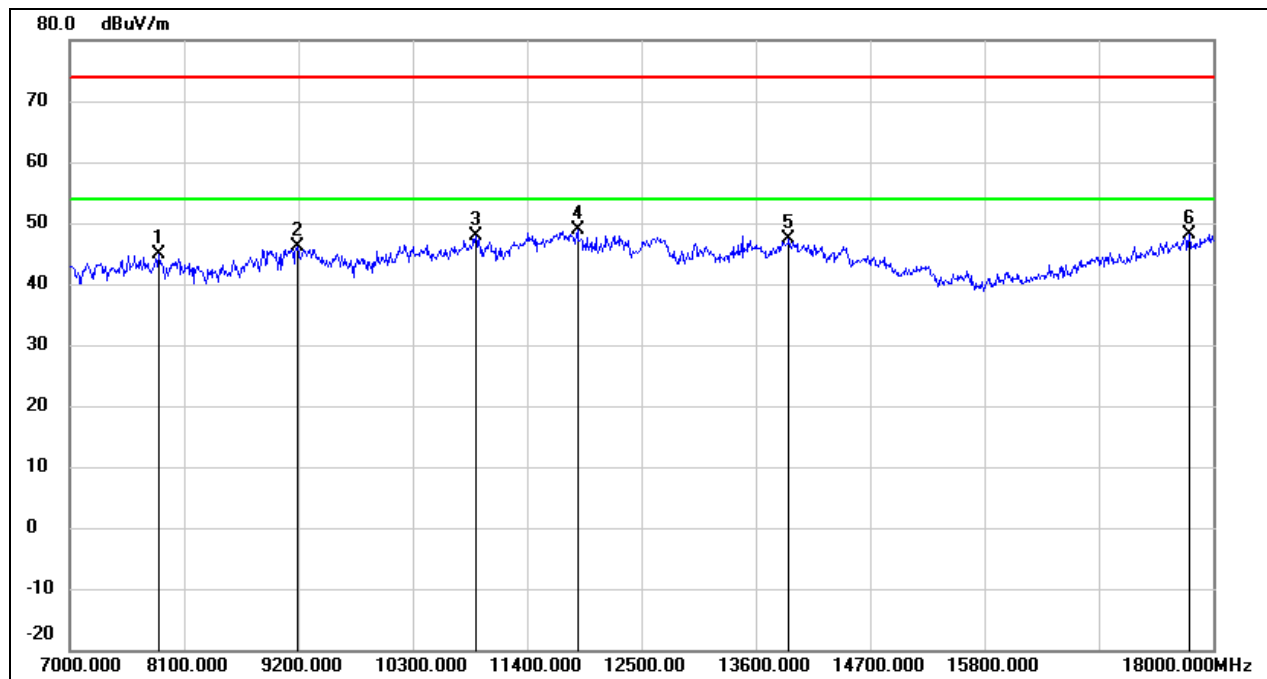


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7858.000        | 38.29          | 6.55           | 44.84           | 74.00          | -29.16      | peak   |
| 2   | 9189.000        | 35.55          | 10.46          | 46.01           | 74.00          | -27.99      | peak   |
| 3   | 10905.000       | 33.40          | 14.36          | 47.76           | 74.00          | -26.24      | peak   |
| 4   | 11884.000       | 31.36          | 17.48          | 48.84           | 74.00          | -25.16      | peak   |
| 5   | 13919.000       | 25.80          | 21.68          | 47.48           | 74.00          | -26.52      | peak   |
| 6   | 17769.000       | 23.61          | 24.53          | 48.14           | 74.00          | -25.86      | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5200    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

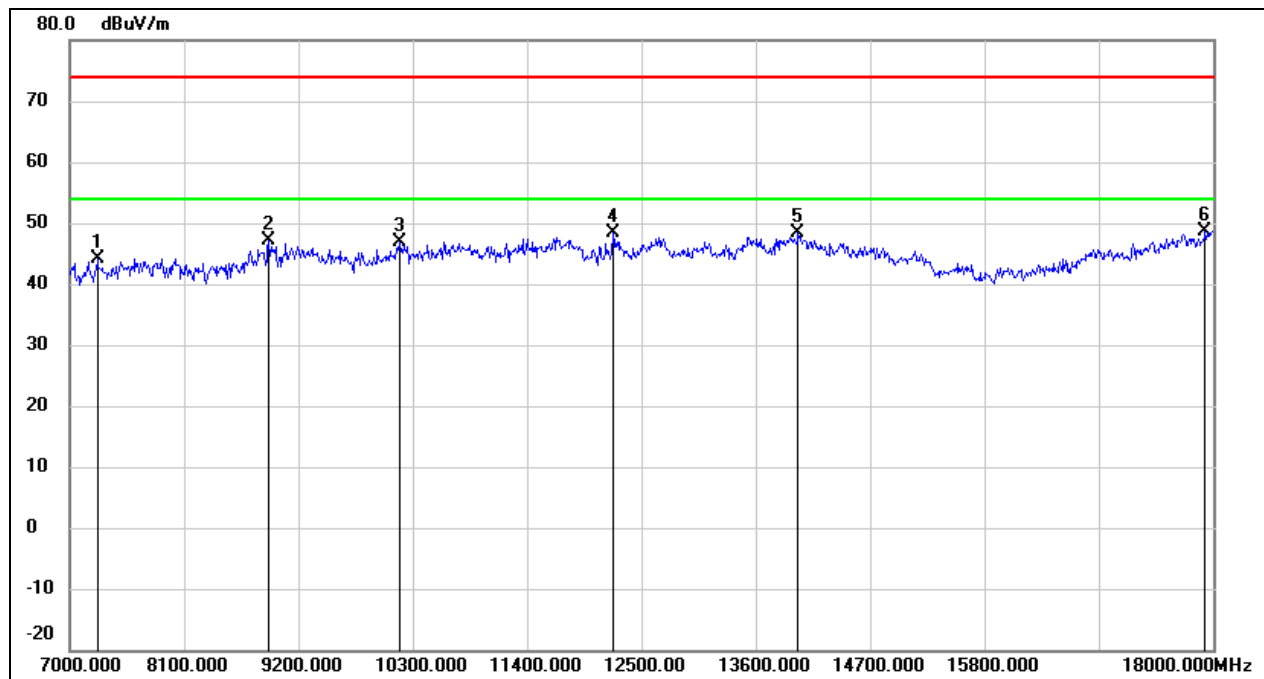


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7264.000        | 37.28          | 6.95           | 44.23           | 74.00          | -29.77      | peak   |
| 2   | 8914.000        | 37.26          | 9.75           | 47.01           | 74.00          | -26.99      | peak   |
| 3   | 10168.000       | 34.69          | 12.13          | 46.82           | 74.00          | -27.18      | peak   |
| 4   | 12225.000       | 30.59          | 17.75          | 48.34           | 74.00          | -25.66      | peak   |
| 5   | 14007.000       | 26.42          | 21.85          | 48.27           | 74.00          | -25.73      | peak   |
| 6   | 17923.000       | 23.11          | 25.60          | 48.71           | 74.00          | -25.29      | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5240    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

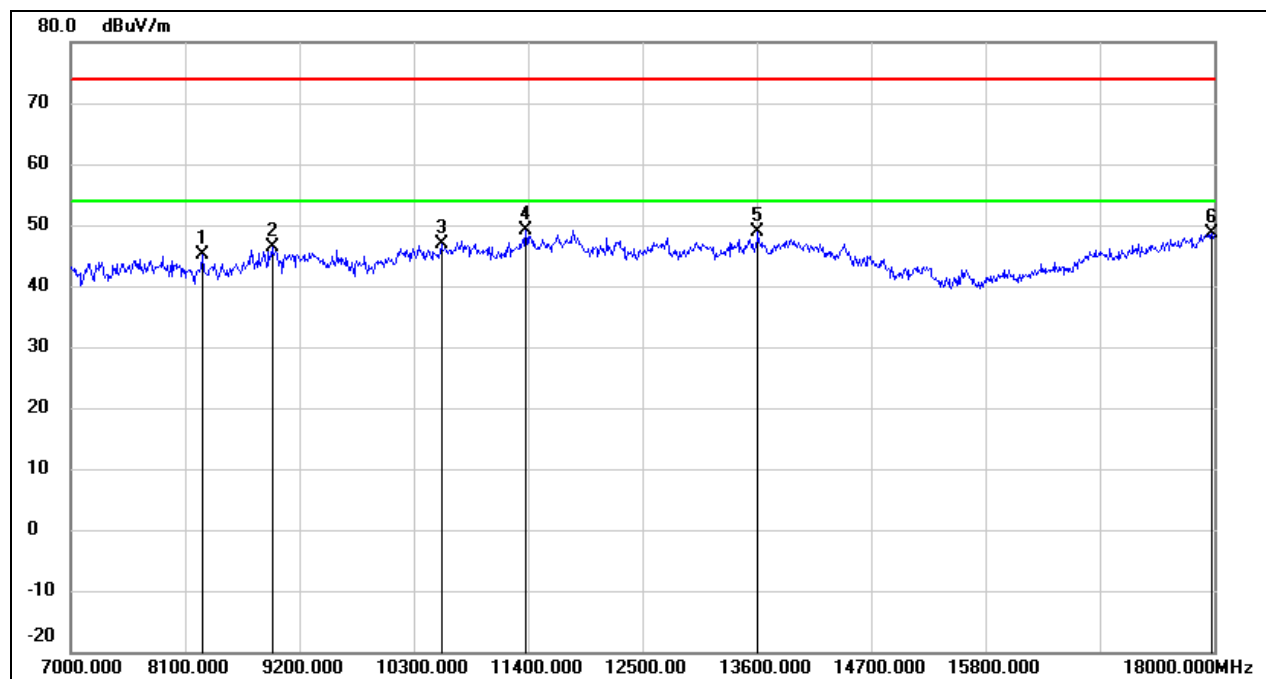


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 8265.000        | 38.39          | 6.67           | 45.06           | 74.00          | -28.94      | peak   |
| 2   | 8936.000        | 36.45          | 9.90           | 46.35           | 74.00          | -27.65      | peak   |
| 3   | 10564.000       | 33.72          | 13.06          | 46.78           | 74.00          | -27.22      | peak   |
| 4   | 11378.000       | 32.97          | 16.26          | 49.23           | 74.00          | -24.77      | peak   |
| 5   | 13611.000       | 27.93          | 20.92          | 48.85           | 74.00          | -25.15      | peak   |
| 6   | 17978.000       | 22.61          | 25.97          | 48.58           | 74.00          | -25.42      | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5240    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

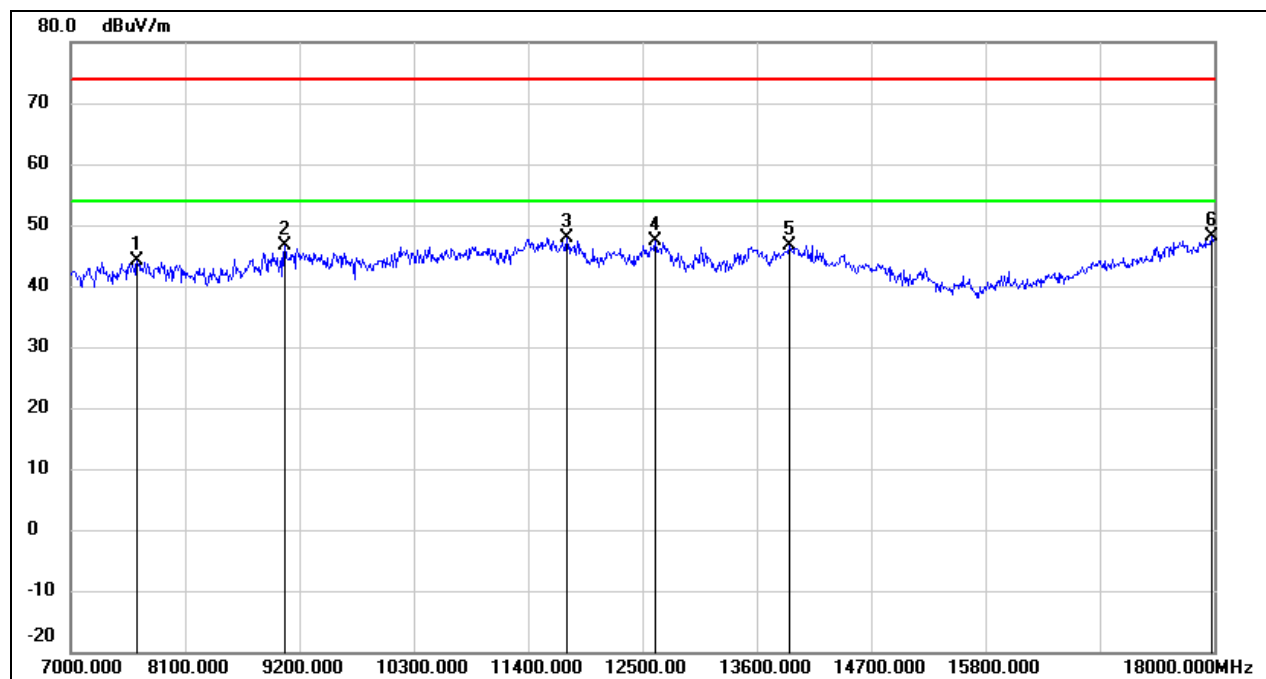


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7638.000        | 37.28          | 6.75           | 44.03           | 74.00          | -29.97      | peak   |
| 2   | 9057.000        | 36.20          | 10.38          | 46.58           | 74.00          | -27.42      | peak   |
| 3   | 11774.000       | 30.60          | 17.28          | 47.88           | 74.00          | -26.12      | peak   |
| 4   | 12621.000       | 29.33          | 17.98          | 47.31           | 74.00          | -26.69      | peak   |
| 5   | 13919.000       | 25.06          | 21.68          | 46.74           | 74.00          | -27.26      | peak   |
| 6   | 17978.000       | 22.05          | 25.97          | 48.02           | 74.00          | -25.98      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5180    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

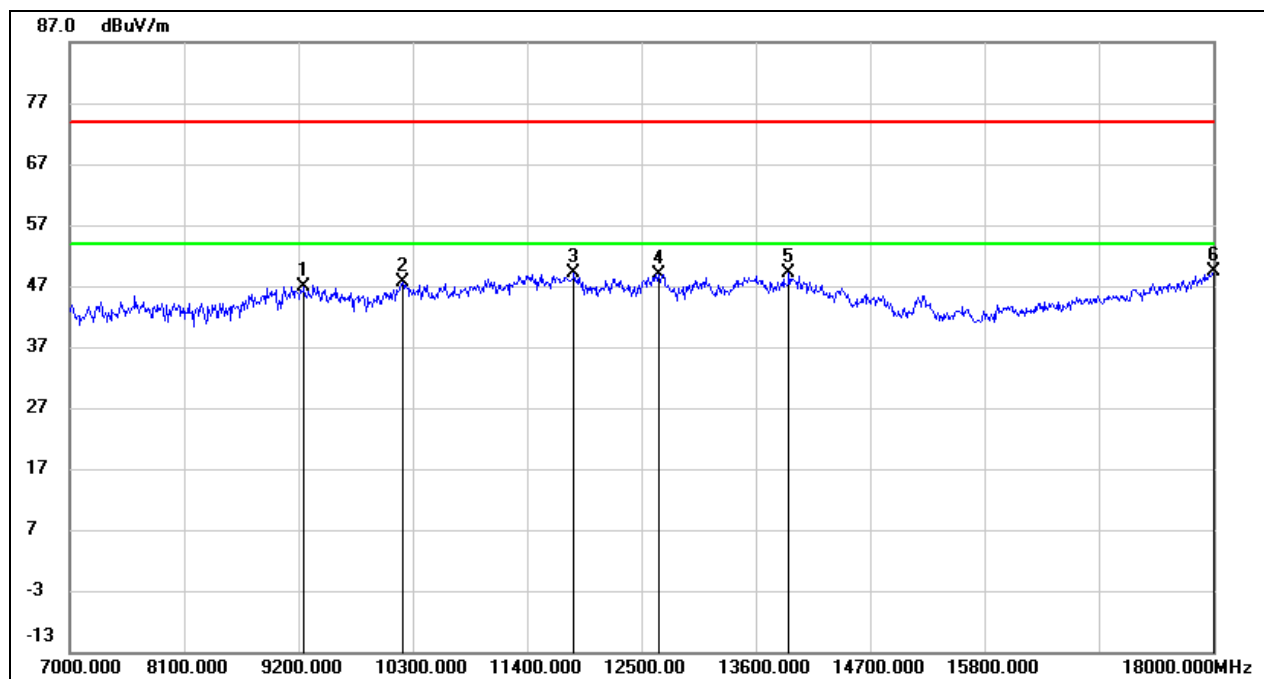


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9255.000        | 36.45          | 10.50          | 46.95           | 74.00          | -27.05      | peak   |
| 2   | 10201.000       | 35.40          | 12.19          | 47.59           | 74.00          | -26.41      | peak   |
| 3   | 11851.000       | 31.76          | 17.43          | 49.19           | 74.00          | -24.81      | peak   |
| 4   | 12665.000       | 30.85          | 18.04          | 48.89           | 74.00          | -25.11      | peak   |
| 5   | 13919.000       | 27.42          | 21.68          | 49.10           | 74.00          | -24.90      | peak   |
| 6   | 18000.000       | 23.20          | 26.12          | 49.32           | 74.00          | -24.68      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5180    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

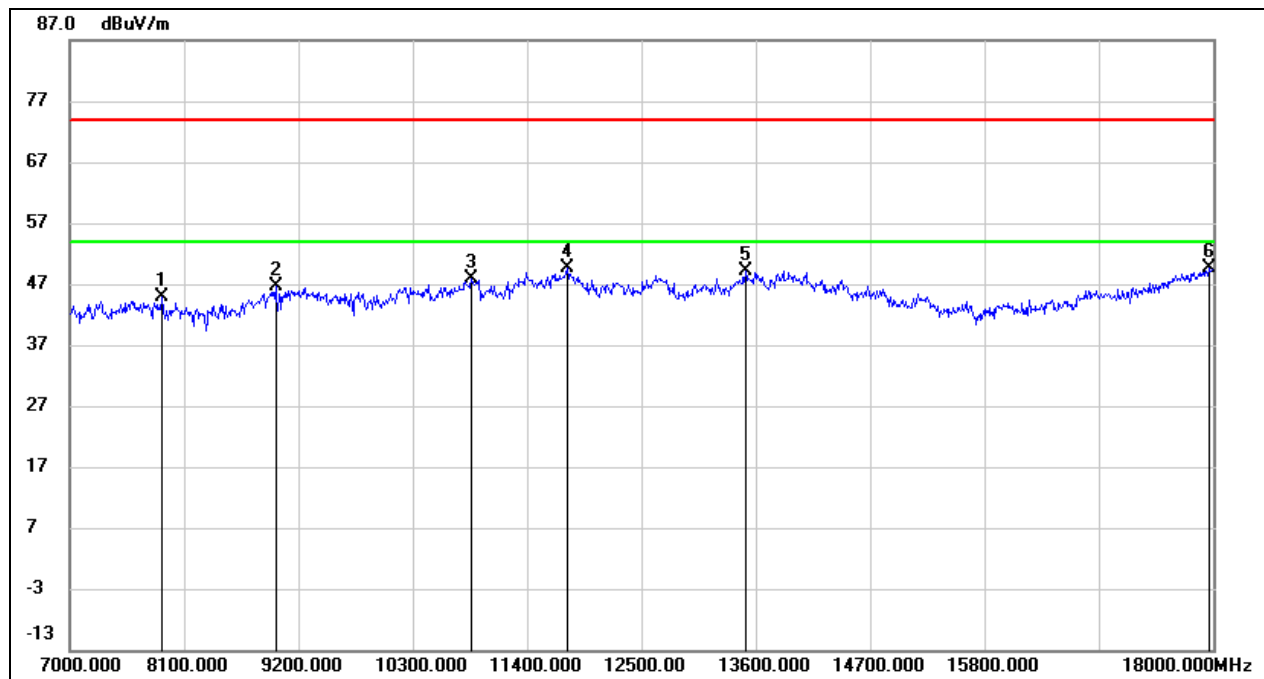


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7891.000        | 38.29          | 6.52           | 44.81           | 74.00          | -29.19      | peak   |
| 2   | 8980.000        | 36.30          | 10.21          | 46.51           | 74.00          | -27.49      | peak   |
| 3   | 10861.000       | 33.58          | 14.20          | 47.78           | 74.00          | -26.22      | peak   |
| 4   | 11785.000       | 32.21          | 17.30          | 49.51           | 74.00          | -24.49      | peak   |
| 5   | 13501.000       | 28.59          | 20.64          | 49.23           | 74.00          | -24.77      | peak   |
| 6   | 17967.000       | 23.79          | 25.89          | 49.68           | 74.00          | -24.32      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5200    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

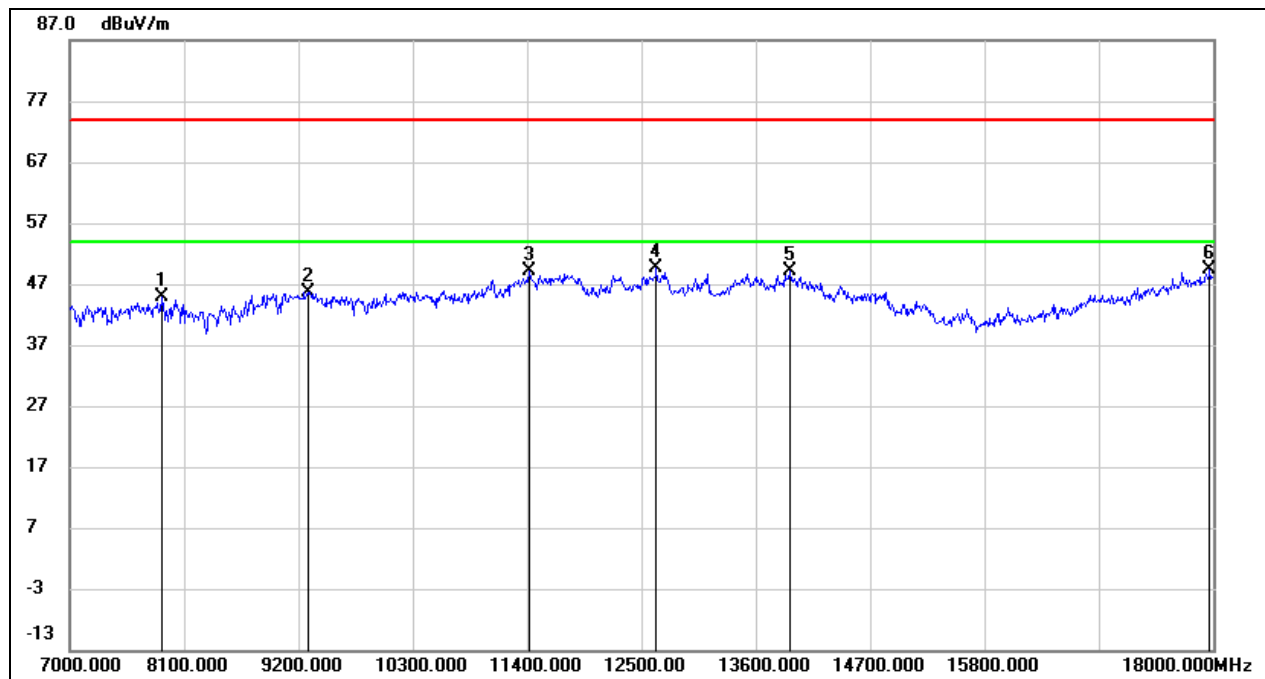


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7880.000        | 38.32          | 6.54           | 44.86           | 74.00          | -29.14      | peak   |
| 2   | 9288.000        | 35.16          | 10.52          | 45.68           | 74.00          | -28.32      | peak   |
| 3   | 11422.000       | 32.73          | 16.46          | 49.19           | 74.00          | -24.81      | peak   |
| 4   | 12643.000       | 31.68          | 18.01          | 49.69           | 74.00          | -24.31      | peak   |
| 5   | 13930.000       | 27.45          | 21.71          | 49.16           | 74.00          | -24.84      | peak   |
| 6   | 17967.000       | 23.43          | 25.89          | 49.32           | 74.00          | -24.68      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5200    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

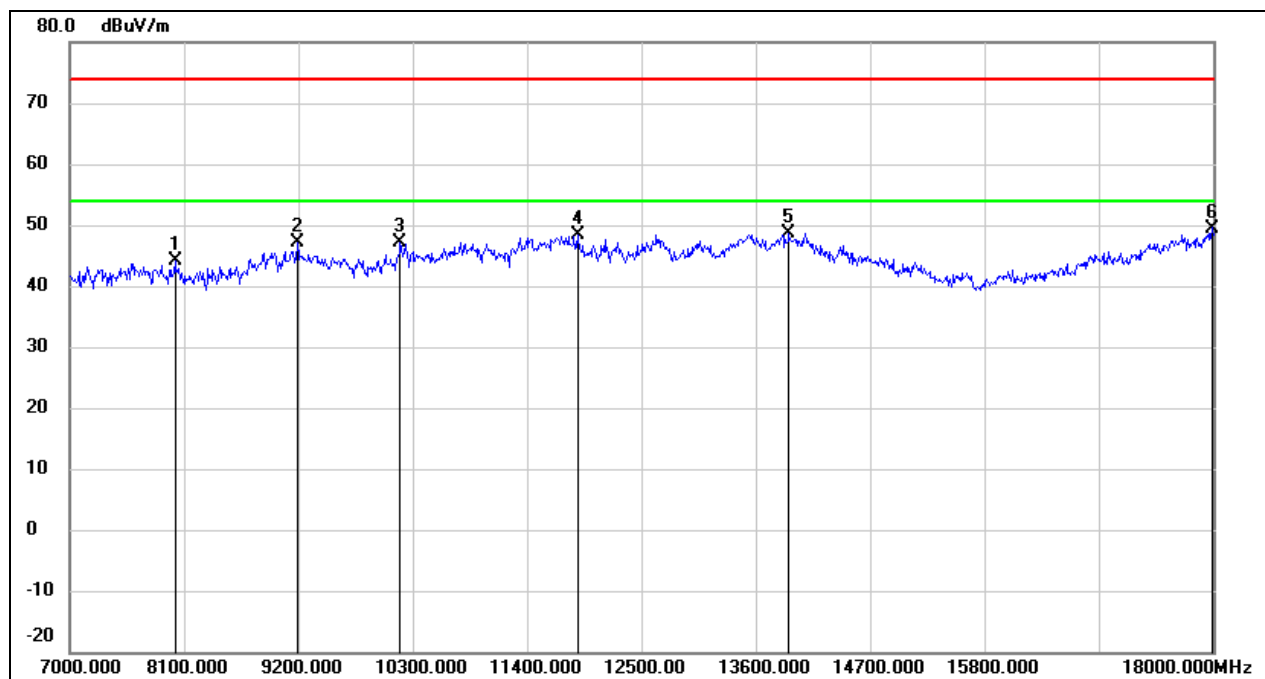


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 8012.000        | 37.57          | 6.44           | 44.01           | 74.00          | -29.99      | peak   |
| 2   | 9189.000        | 36.57          | 10.46          | 47.03           | 74.00          | -26.97      | peak   |
| 3   | 10179.000       | 35.08          | 12.14          | 47.22           | 74.00          | -26.78      | peak   |
| 4   | 11884.000       | 30.86          | 17.48          | 48.34           | 74.00          | -25.66      | peak   |
| 5   | 13919.000       | 27.00          | 21.68          | 48.68           | 74.00          | -25.32      | peak   |
| 6   | 17989.000       | 23.46          | 26.04          | 49.50           | 74.00          | -24.50      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5240    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

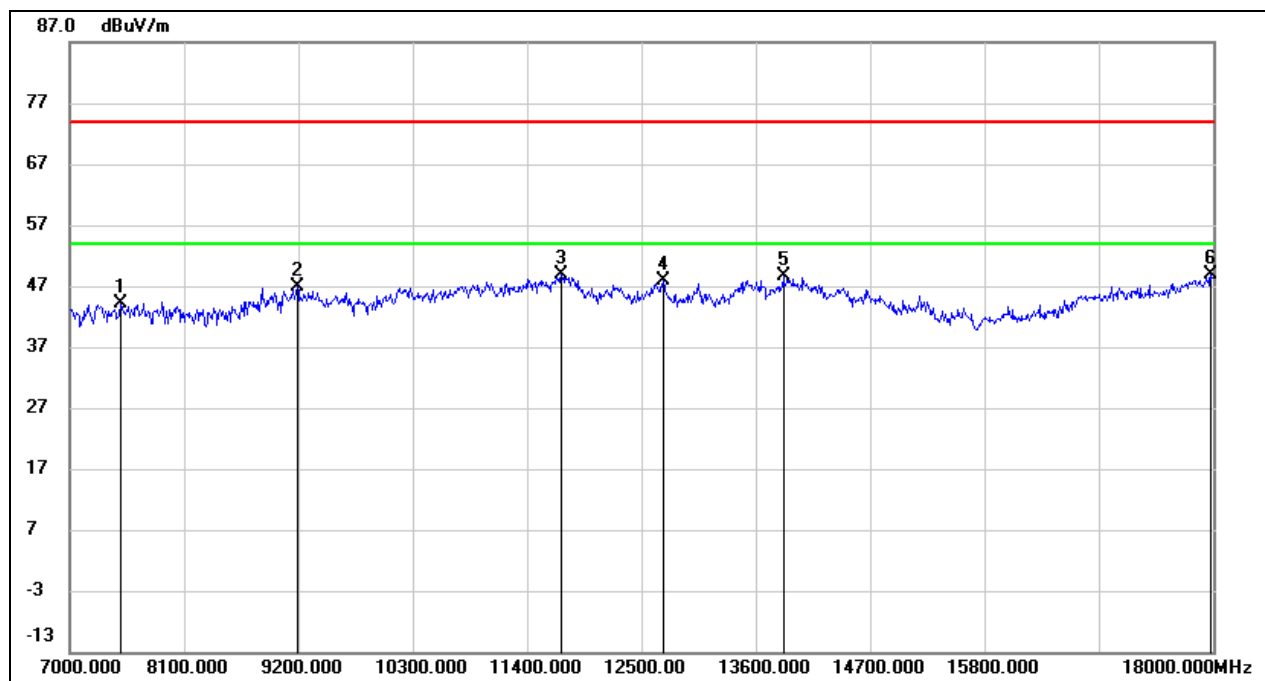


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7484.000        | 37.35          | 6.87           | 44.22           | 74.00          | -29.78      | peak   |
| 2   | 9189.000        | 36.34          | 10.46          | 46.80           | 74.00          | -27.20      | peak   |
| 3   | 11730.000       | 31.59          | 17.19          | 48.78           | 74.00          | -25.22      | peak   |
| 4   | 12709.000       | 29.76          | 18.09          | 47.85           | 74.00          | -26.15      | peak   |
| 5   | 13864.000       | 27.00          | 21.53          | 48.53           | 74.00          | -25.47      | peak   |
| 6   | 17978.000       | 22.91          | 25.97          | 48.88           | 74.00          | -25.12      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE20 | Channel:      | 5240    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

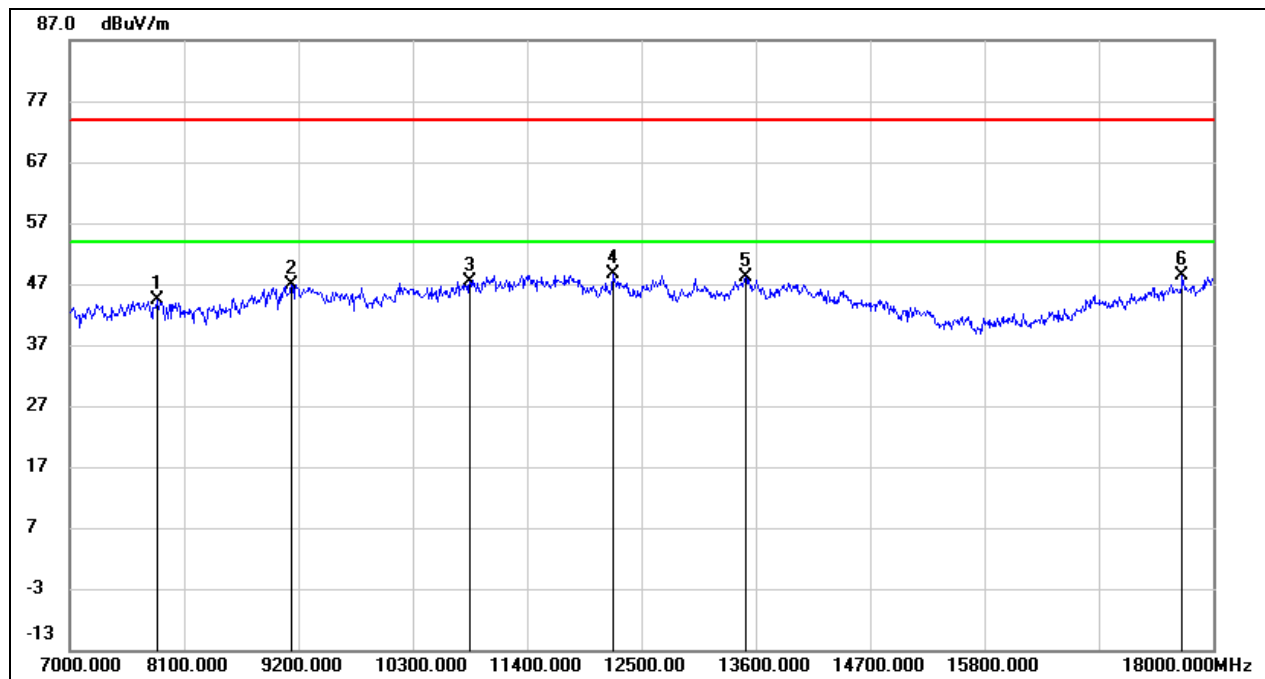


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7847.000        | 37.69          | 6.57           | 44.26           | 74.00          | -29.74      | peak   |
| 2   | 9134.000        | 36.55          | 10.41          | 46.96           | 74.00          | -27.04      | peak   |
| 3   | 10850.000       | 33.26          | 14.15          | 47.41           | 74.00          | -26.59      | peak   |
| 4   | 12225.000       | 30.94          | 17.75          | 48.69           | 74.00          | -25.31      | peak   |
| 5   | 13501.000       | 27.43          | 20.64          | 48.07           | 74.00          | -25.93      | peak   |
| 6   | 17703.000       | 24.40          | 24.09          | 48.49           | 74.00          | -25.51      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE40 | Channel:      | 5190    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

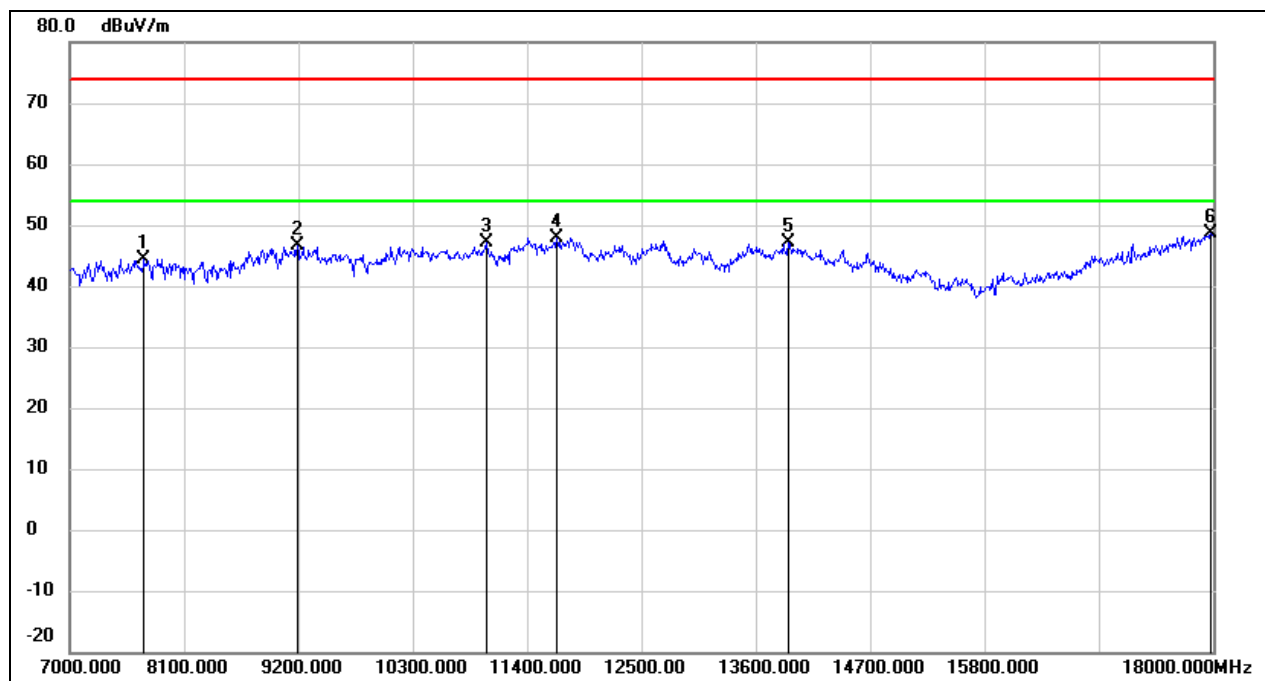


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7715.000        | 37.81          | 6.68           | 44.49           | 74.00          | -29.51      | peak   |
| 2   | 9189.000        | 36.26          | 10.46          | 46.72           | 74.00          | -27.28      | peak   |
| 3   | 11004.000       | 32.36          | 14.74          | 47.10           | 74.00          | -26.90      | peak   |
| 4   | 11686.000       | 30.84          | 17.12          | 47.96           | 74.00          | -26.04      | peak   |
| 5   | 13908.000       | 25.57          | 21.66          | 47.23           | 74.00          | -26.77      | peak   |
| 6   | 17978.000       | 22.55          | 25.97          | 48.52           | 74.00          | -25.48      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE40 | Channel:      | 5190    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

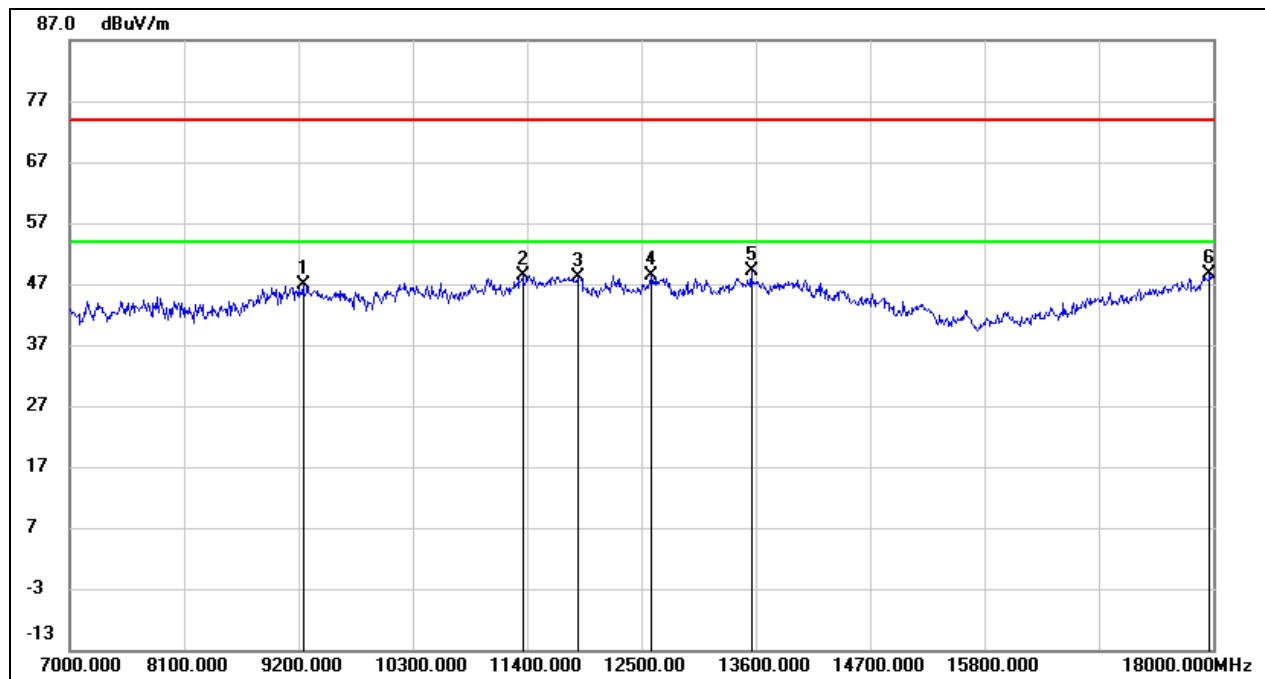


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9244.000        | 36.29          | 10.49          | 46.78           | 74.00          | -27.22      | peak   |
| 2   | 11356.000       | 32.16          | 16.19          | 48.35           | 74.00          | -25.65      | peak   |
| 3   | 11895.000       | 30.64          | 17.51          | 48.15           | 74.00          | -25.85      | peak   |
| 4   | 12599.000       | 30.55          | 17.95          | 48.50           | 74.00          | -25.50      | peak   |
| 5   | 13556.000       | 28.42          | 20.78          | 49.20           | 74.00          | -24.80      | peak   |
| 6   | 17967.000       | 22.65          | 25.89          | 48.54           | 74.00          | -25.46      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE40 | Channel:      | 5230    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

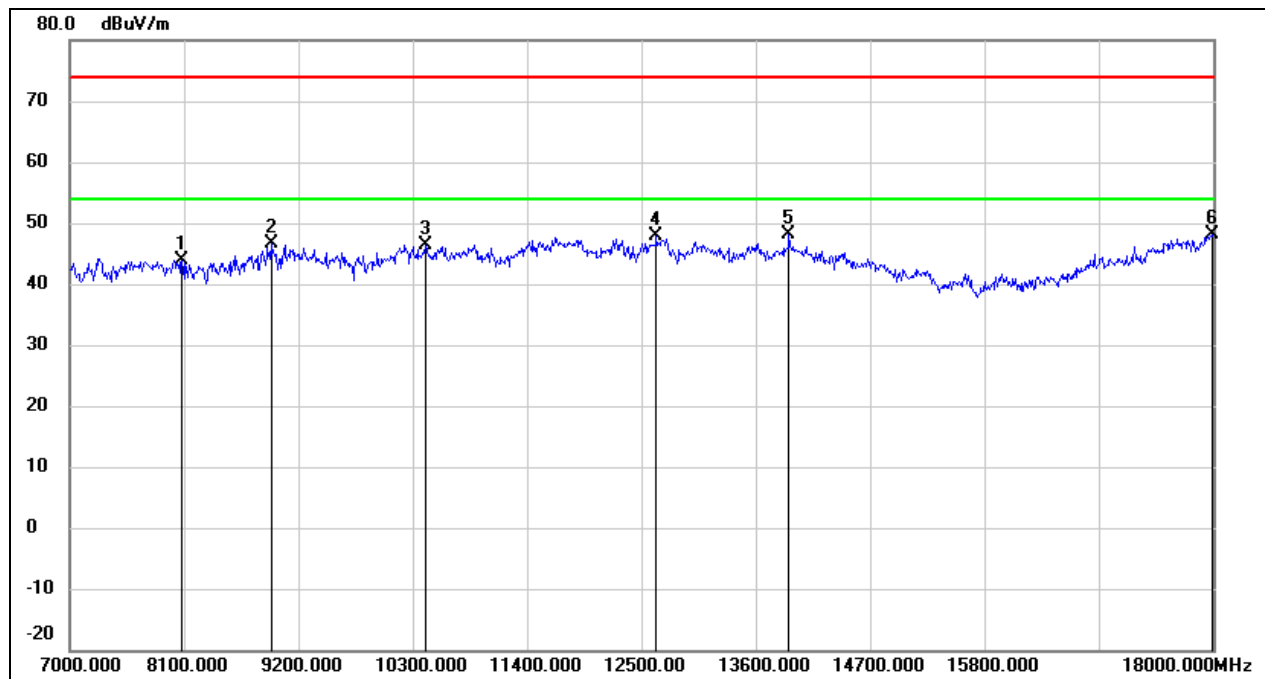


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 8078.000        | 37.34          | 6.51           | 43.85           | 74.00          | -30.15      | peak   |
| 2   | 8936.000        | 36.61          | 9.90           | 46.51           | 74.00          | -27.49      | peak   |
| 3   | 10421.000       | 33.80          | 12.66          | 46.46           | 74.00          | -27.54      | peak   |
| 4   | 12643.000       | 29.89          | 18.01          | 47.90           | 74.00          | -26.10      | peak   |
| 5   | 13919.000       | 26.48          | 21.68          | 48.16           | 74.00          | -25.84      | peak   |
| 6   | 17989.000       | 21.99          | 26.04          | 48.03           | 74.00          | -25.97      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE40 | Channel:      | 5230    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

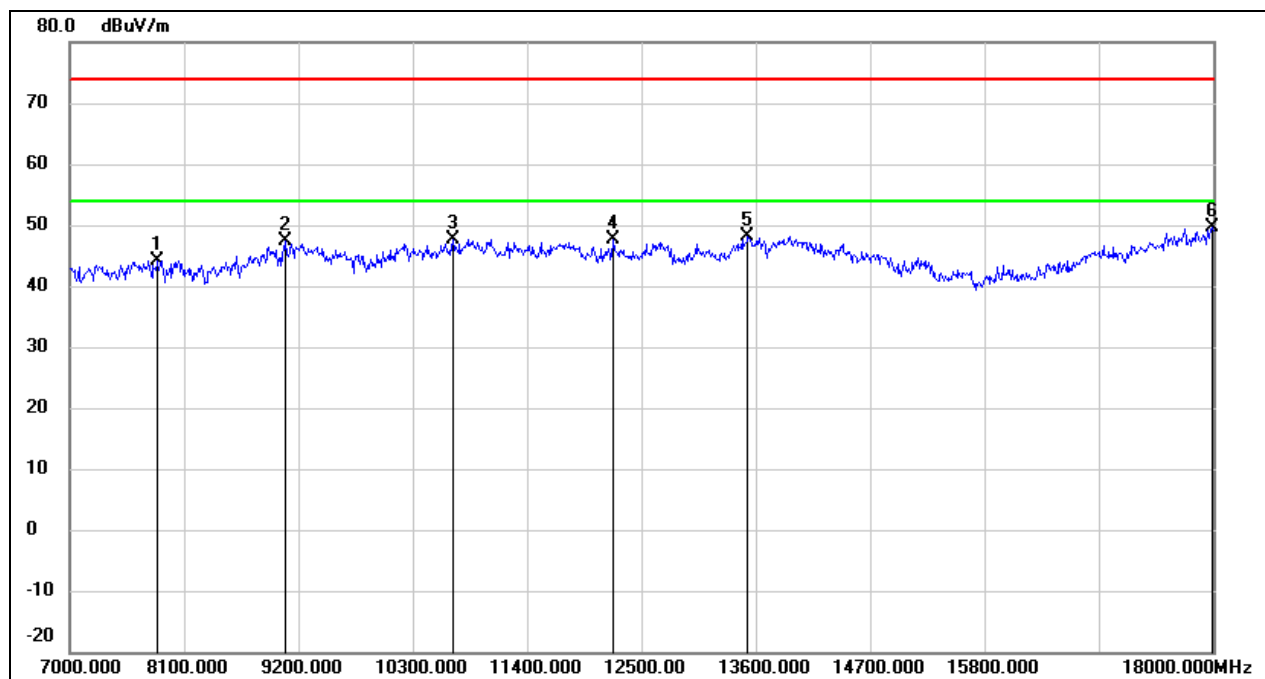


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7847.000        | 37.65          | 6.57           | 44.22           | 74.00          | -29.78      | peak   |
| 2   | 9079.000        | 36.89          | 10.39          | 47.28           | 74.00          | -26.72      | peak   |
| 3   | 10685.000       | 34.13          | 13.53          | 47.66           | 74.00          | -26.34      | peak   |
| 4   | 12225.000       | 29.94          | 17.75          | 47.69           | 74.00          | -26.31      | peak   |
| 5   | 13523.000       | 27.52          | 20.70          | 48.22           | 74.00          | -25.78      | peak   |
| 6   | 17989.000       | 23.53          | 26.04          | 49.57           | 74.00          | -24.43      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE80 | Channel:      | 5210    |
| Polarity:  | Horizontal    | Test Voltage: | DC 12 V |

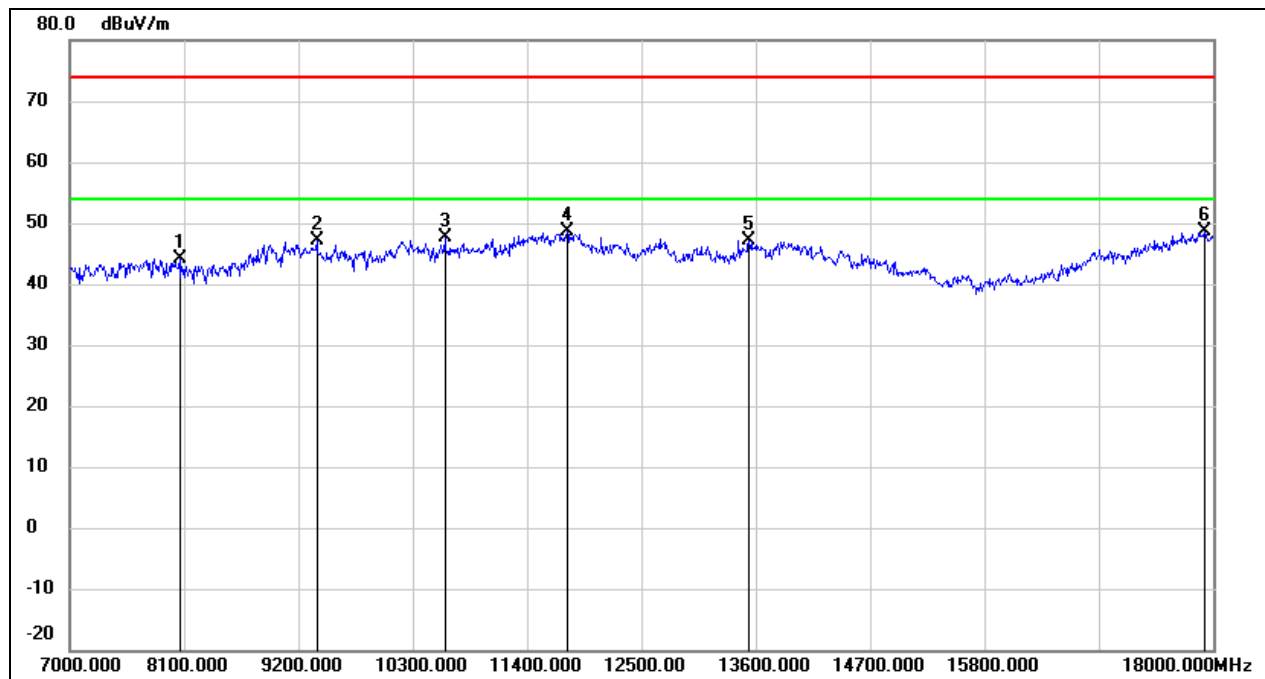


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 8056.000        | 37.75          | 6.48           | 44.23           | 74.00          | -29.77      | peak   |
| 2   | 9376.000        | 36.59          | 10.58          | 47.17           | 74.00          | -26.83      | peak   |
| 3   | 10608.000       | 34.51          | 13.23          | 47.74           | 74.00          | -26.26      | peak   |
| 4   | 11785.000       | 31.25          | 17.30          | 48.55           | 74.00          | -25.45      | peak   |
| 5   | 13534.000       | 26.33          | 20.73          | 47.06           | 74.00          | -26.94      | peak   |
| 6   | 17912.000       | 23.00          | 25.52          | 48.52           | 74.00          | -25.48      | peak   |

|            |               |               |         |
|------------|---------------|---------------|---------|
| Test Mode: | 802.11ax HE80 | Channel:      | 5210    |
| Polarity:  | Vertical      | Test Voltage: | DC 12 V |

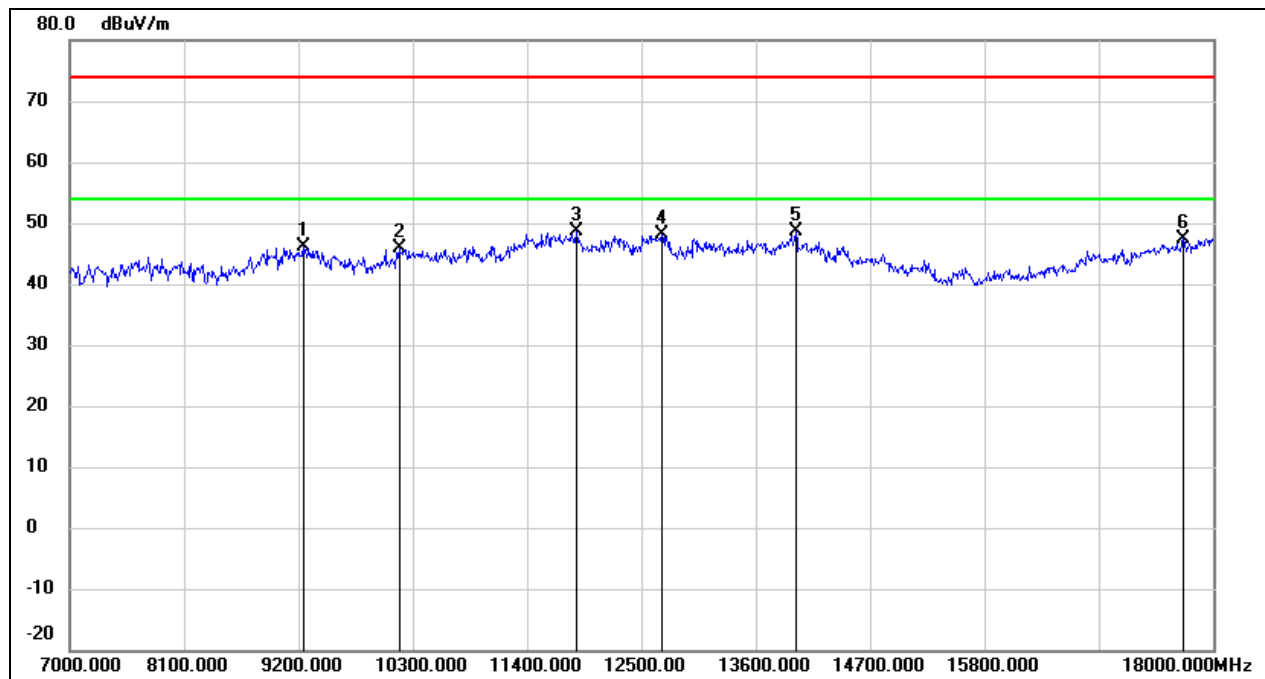


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9244.000        | 35.74          | 10.49          | 46.23           | 74.00          | -27.77      | peak   |
| 2   | 10168.000       | 33.68          | 12.13          | 45.81           | 74.00          | -28.19      | peak   |
| 3   | 11873.000       | 31.07          | 17.46          | 48.53           | 74.00          | -25.47      | peak   |
| 4   | 12698.000       | 30.03          | 18.08          | 48.11           | 74.00          | -25.89      | peak   |
| 5   | 13985.000       | 26.80          | 21.85          | 48.65           | 74.00          | -25.35      | peak   |
| 6   | 17714.000       | 23.34          | 24.16          | 47.50           | 74.00          | -26.50      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5180    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

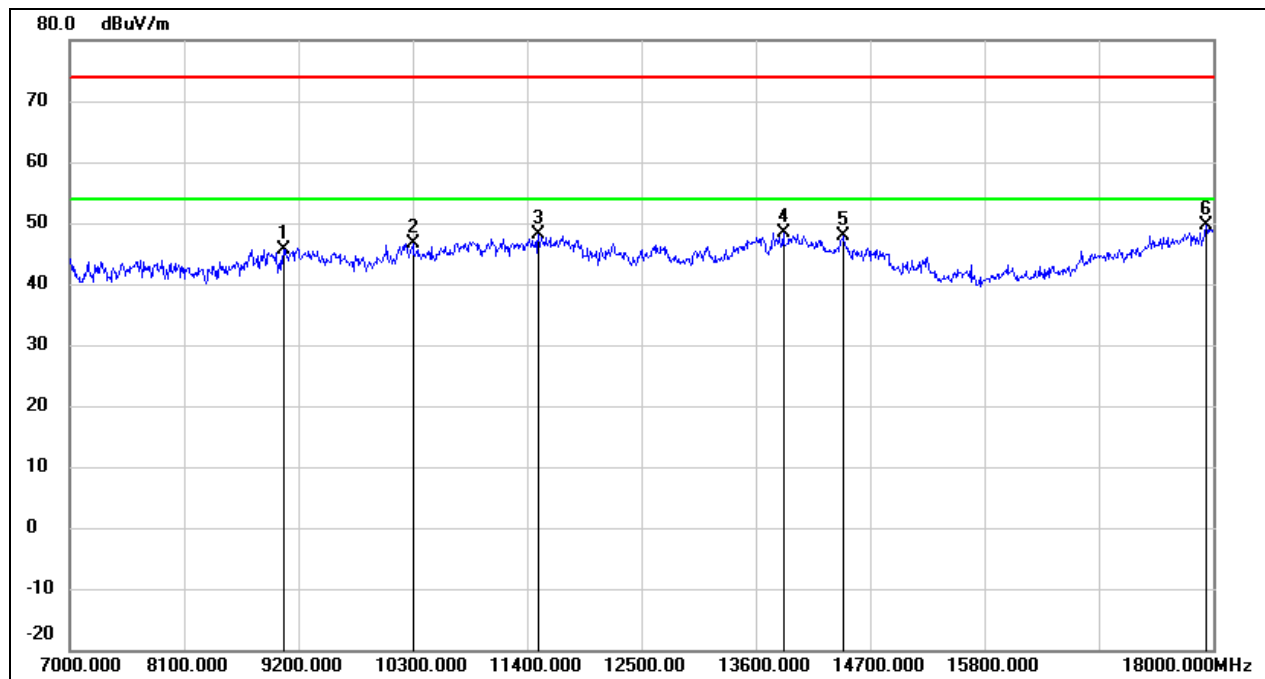


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9057.000        | 35.22          | 10.38          | 45.60           | 74.00          | -28.40      | peak   |
| 2   | 10300.000       | 34.25          | 12.40          | 46.65           | 74.00          | -27.35      | peak   |
| 3   | 11510.000       | 31.31          | 16.79          | 48.10           | 74.00          | -25.90      | peak   |
| 4   | 13864.000       | 26.81          | 21.53          | 48.34           | 74.00          | -25.66      | peak   |
| 5   | 14447.000       | 27.92          | 20.00          | 47.92           | 74.00          | -26.08      | peak   |
| 6   | 17934.000       | 24.06          | 25.67          | 49.73           | 74.00          | -24.27      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5180    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

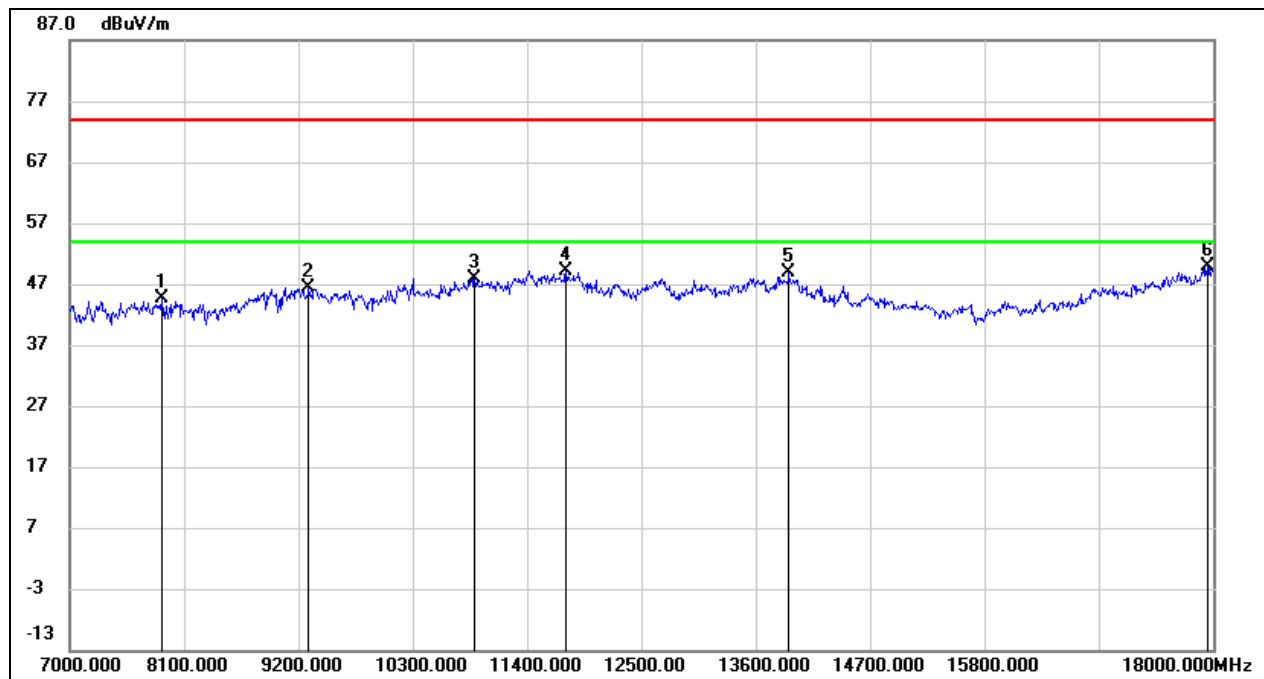


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7880.000        | 38.18          | 6.54           | 44.72           | 74.00          | -29.28      | peak   |
| 2   | 9299.000        | 35.82          | 10.53          | 46.35           | 74.00          | -27.65      | peak   |
| 3   | 10894.000       | 33.67          | 14.32          | 47.99           | 74.00          | -26.01      | peak   |
| 4   | 11774.000       | 31.87          | 17.28          | 49.15           | 74.00          | -24.85      | peak   |
| 5   | 13919.000       | 27.11          | 21.68          | 48.79           | 74.00          | -25.21      | peak   |
| 6   | 17945.000       | 24.22          | 25.75          | 49.97           | 74.00          | -24.03      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5200    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

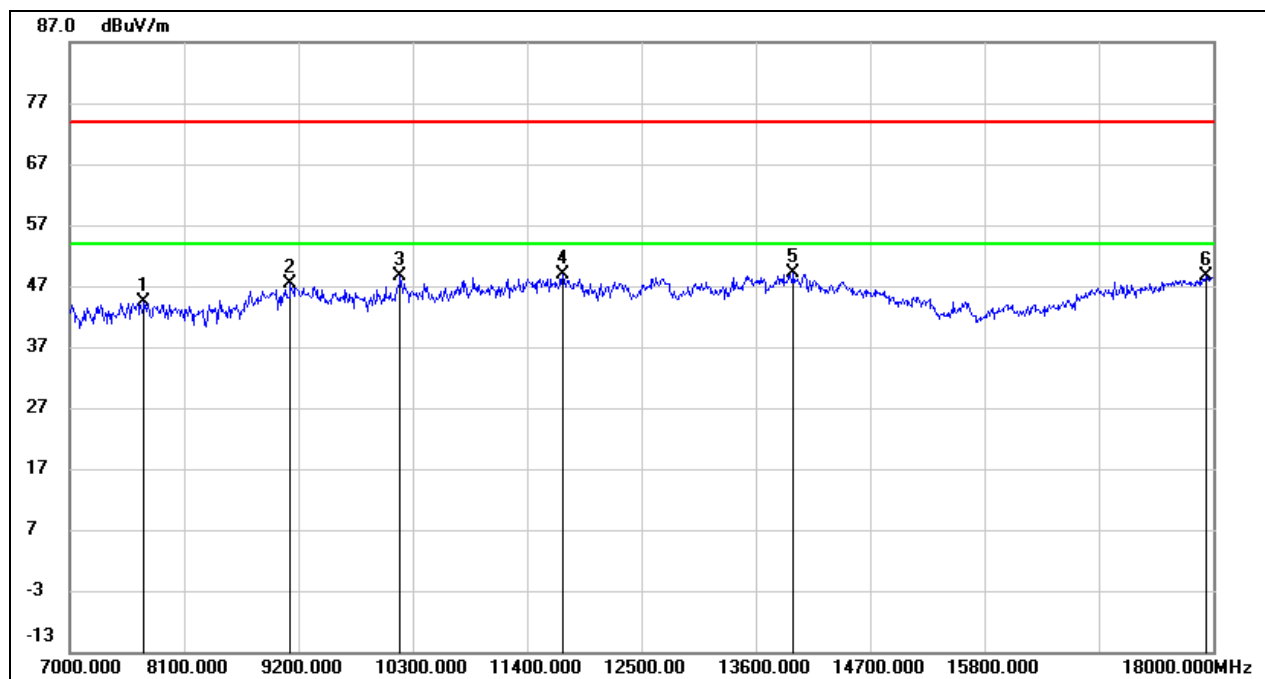


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7715.000        | 37.75          | 6.68           | 44.43           | 74.00          | -29.57      | peak   |
| 2   | 9123.000        | 36.97          | 10.42          | 47.39           | 74.00          | -26.61      | peak   |
| 3   | 10179.000       | 36.52          | 12.14          | 48.66           | 74.00          | -25.34      | peak   |
| 4   | 11741.000       | 31.77          | 17.22          | 48.99           | 74.00          | -25.01      | peak   |
| 5   | 13963.000       | 27.31          | 21.78          | 49.09           | 74.00          | -24.91      | peak   |
| 6   | 17934.000       | 23.03          | 25.67          | 48.70           | 74.00          | -25.30      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5200    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

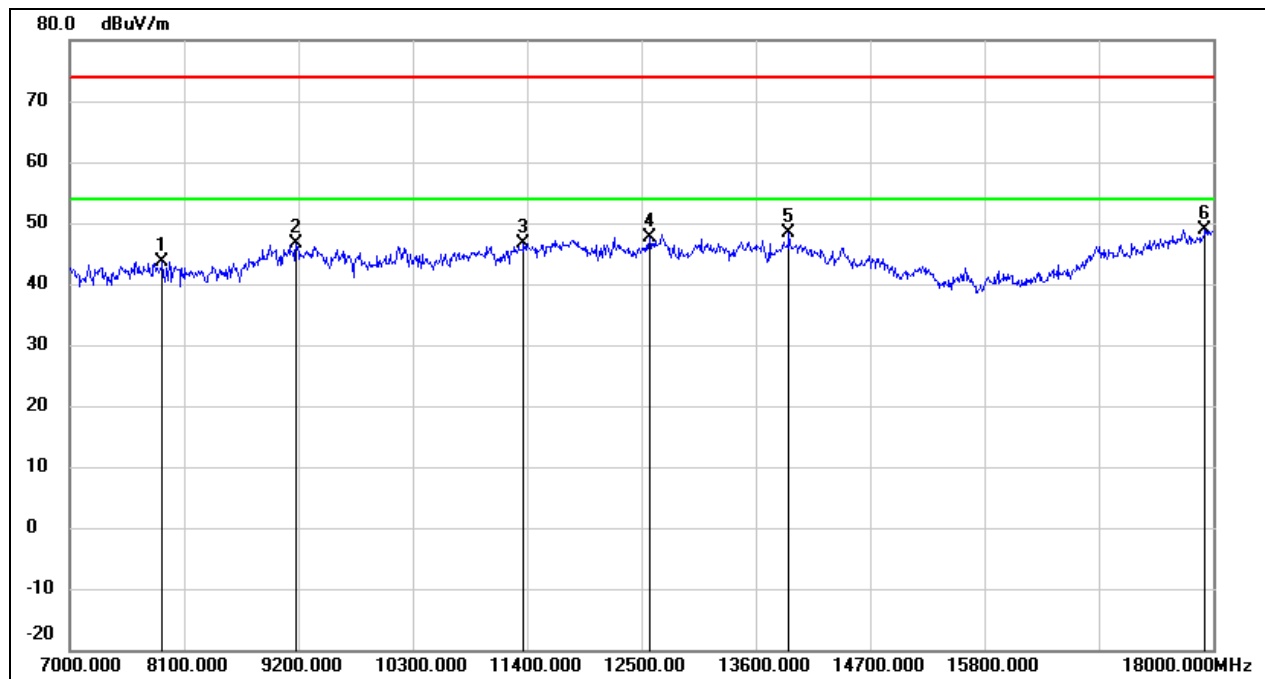


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7891.000        | 37.11          | 6.52           | 43.63           | 74.00          | -30.37      | peak   |
| 2   | 9178.000        | 36.13          | 10.45          | 46.58           | 74.00          | -27.42      | peak   |
| 3   | 11367.000       | 30.43          | 16.22          | 46.65           | 74.00          | -27.35      | peak   |
| 4   | 12577.000       | 29.68          | 17.93          | 47.61           | 74.00          | -26.39      | peak   |
| 5   | 13919.000       | 26.70          | 21.68          | 48.38           | 74.00          | -25.62      | peak   |
| 6   | 17923.000       | 23.29          | 25.60          | 48.89           | 74.00          | -25.11      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5240    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

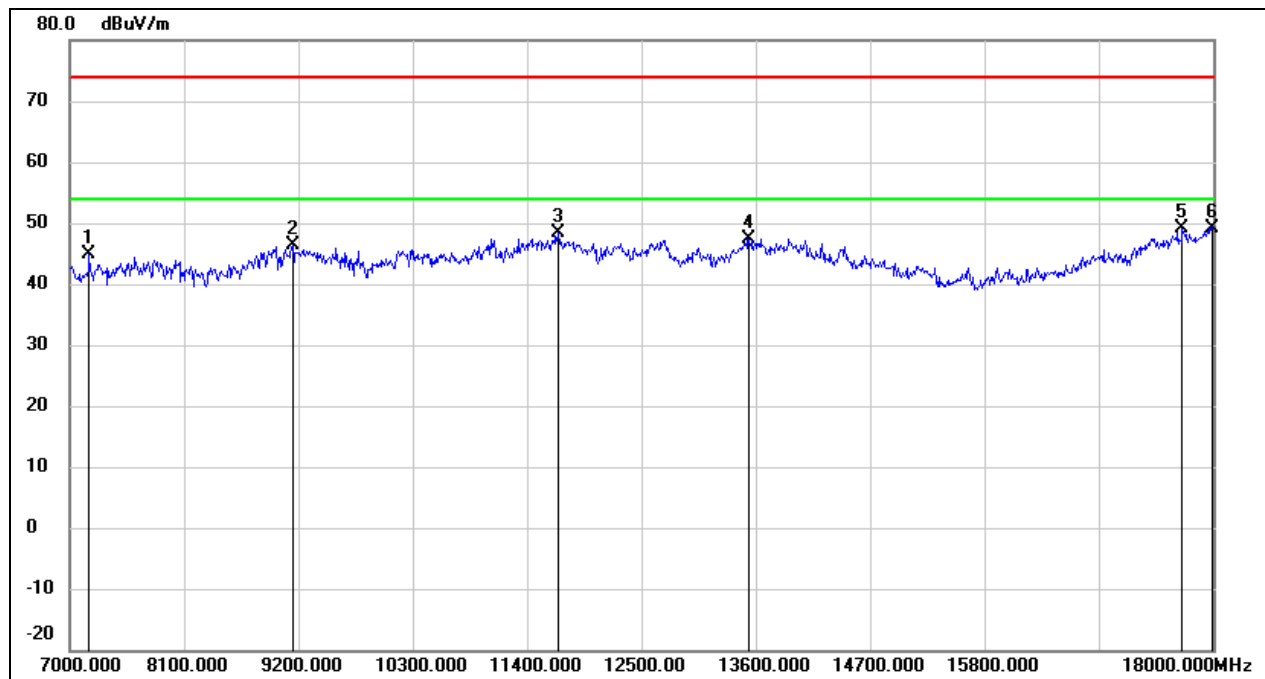


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7187.000        | 37.91          | 6.98           | 44.89           | 74.00          | -29.11      | peak   |
| 2   | 9145.000        | 35.95          | 10.43          | 46.38           | 74.00          | -27.62      | peak   |
| 3   | 11697.000       | 31.16          | 17.13          | 48.29           | 74.00          | -25.71      | peak   |
| 4   | 13534.000       | 26.70          | 20.73          | 47.43           | 74.00          | -26.57      | peak   |
| 5   | 17703.000       | 25.15          | 24.09          | 49.24           | 74.00          | -24.76      | peak   |
| 6   | 17989.000       | 23.21          | 26.04          | 49.25           | 74.00          | -24.75      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT20 | Channel:      | 5240    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

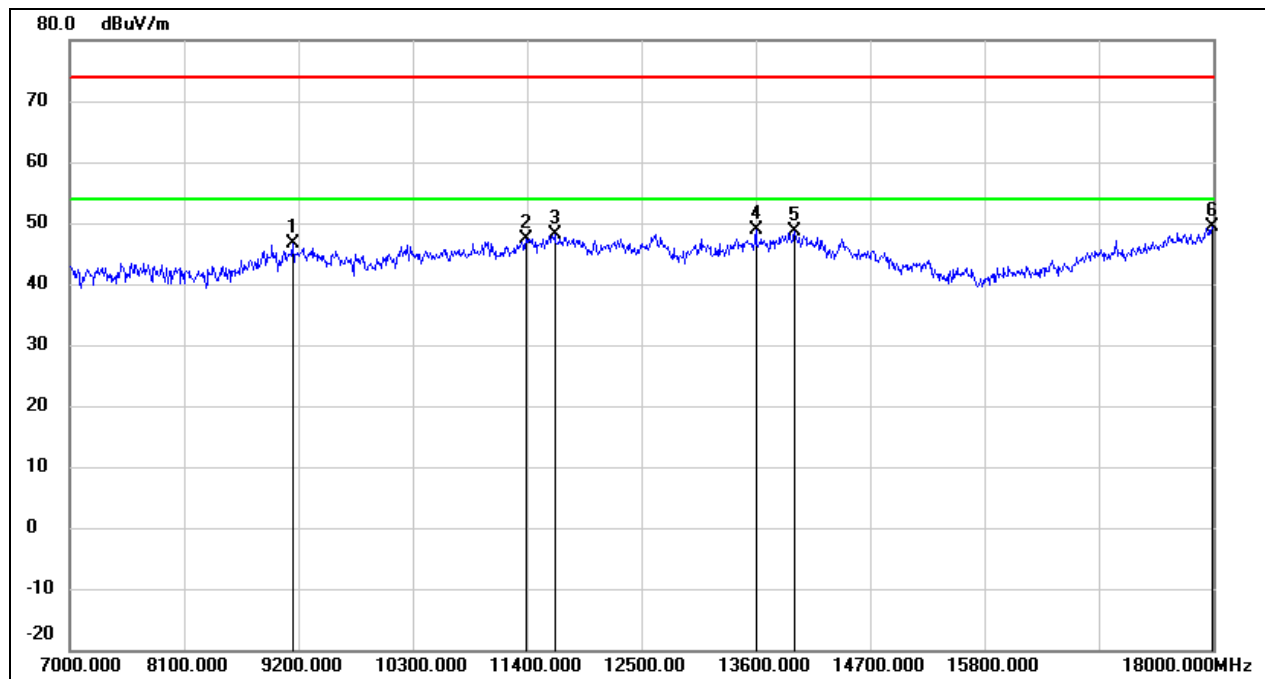


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9145.000        | 36.22          | 10.43          | 46.65           | 74.00          | -27.35      | peak   |
| 2   | 11389.000       | 31.10          | 16.31          | 47.41           | 74.00          | -26.59      | peak   |
| 3   | 11664.000       | 30.93          | 17.08          | 48.01           | 74.00          | -25.99      | peak   |
| 4   | 13600.000       | 28.04          | 20.89          | 48.93           | 74.00          | -25.07      | peak   |
| 5   | 13974.000       | 26.90          | 21.82          | 48.72           | 74.00          | -25.28      | peak   |
| 6   | 17989.000       | 23.29          | 26.04          | 49.33           | 74.00          | -24.67      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT40 | Channel:      | 5190    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

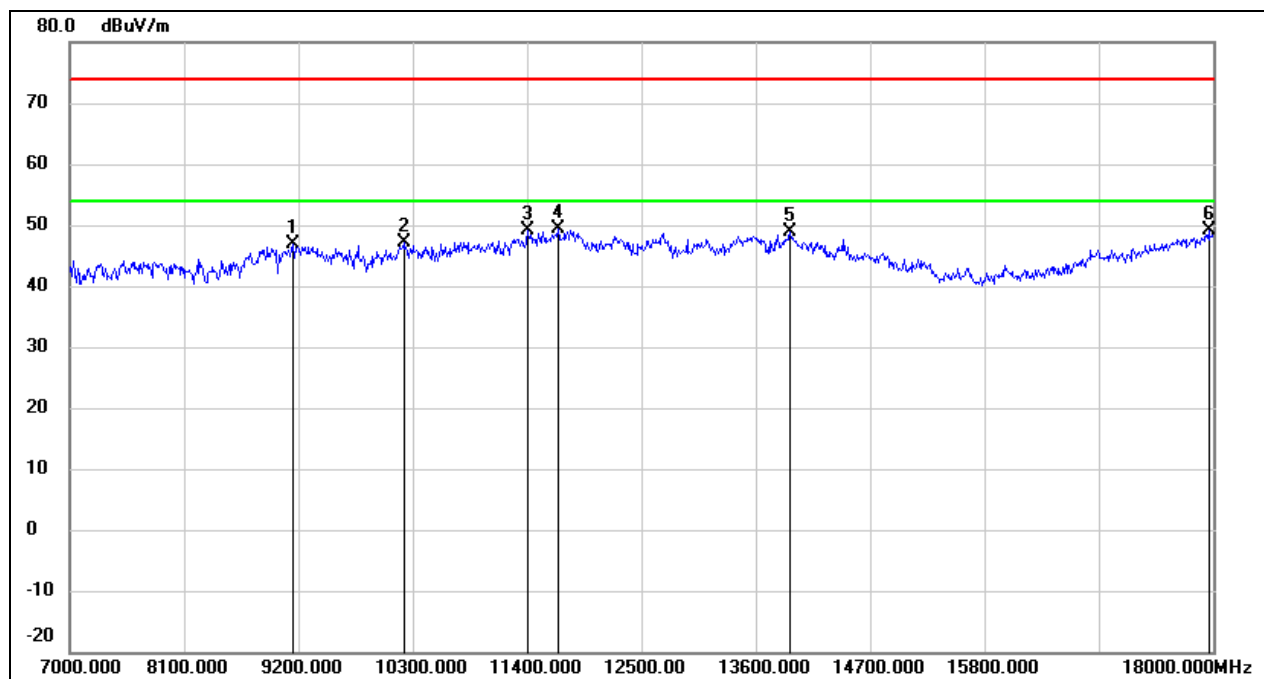


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9145.000           | 36.36             | 10.43             | 46.79              | 74.00             | -27.21         | peak   |
| 2   | 10212.000          | 34.81             | 12.21             | 47.02              | 74.00             | -26.98         | peak   |
| 3   | 11400.000          | 32.69             | 16.36             | 49.05              | 74.00             | -24.95         | peak   |
| 4   | 11697.000          | 32.29             | 17.13             | 49.42              | 74.00             | -24.58         | peak   |
| 5   | 13930.000          | 27.06             | 21.71             | 48.77              | 74.00             | -25.23         | peak   |
| 6   | 17956.000          | 23.30             | 25.82             | 49.12              | 74.00             | -24.88         | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT40 | Channel:      | 5190    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

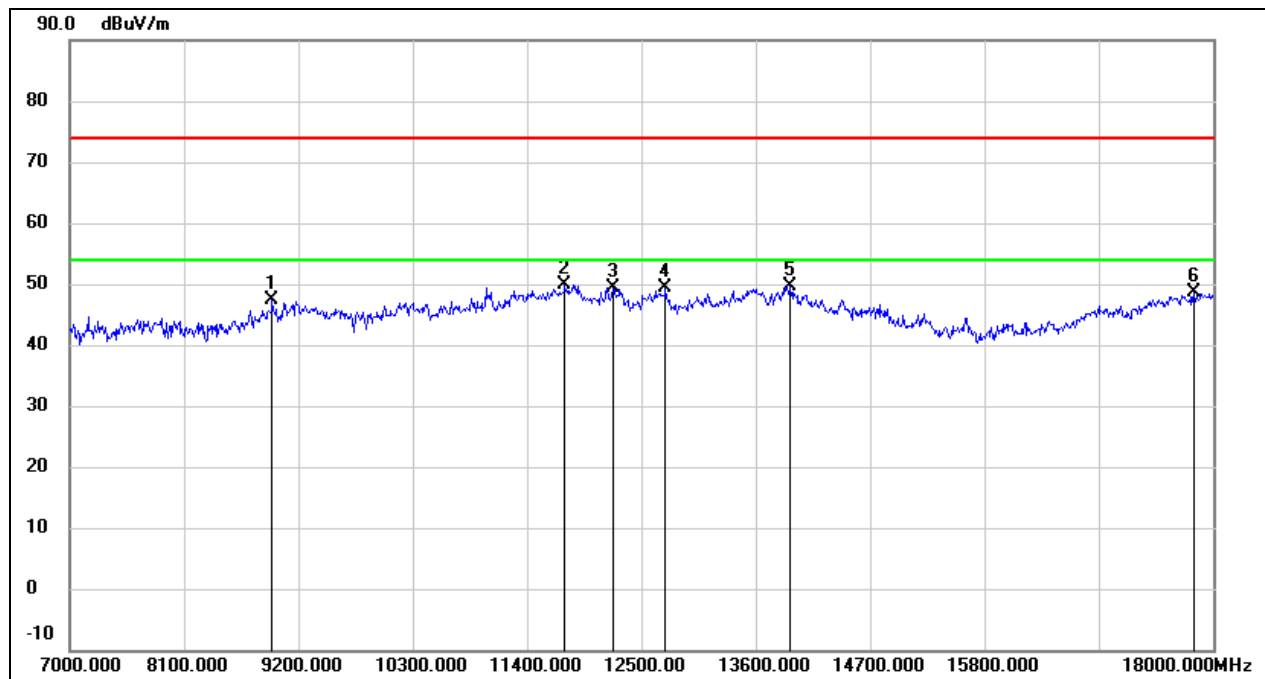


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 8947.000        | 37.32          | 9.98           | 47.30           | 74.00          | -26.70      | peak   |
| 2   | 11763.000       | 32.61          | 17.26          | 49.87           | 74.00          | -24.13      | peak   |
| 3   | 12225.000       | 31.69          | 17.75          | 49.44           | 74.00          | -24.56      | peak   |
| 4   | 12731.000       | 31.23          | 18.12          | 49.35           | 74.00          | -24.65      | peak   |
| 5   | 13930.000       | 27.94          | 21.71          | 49.65           | 74.00          | -24.35      | peak   |
| 6   | 17813.000       | 23.75          | 24.84          | 48.59           | 74.00          | -25.41      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT40 | Channel:      | 5230    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

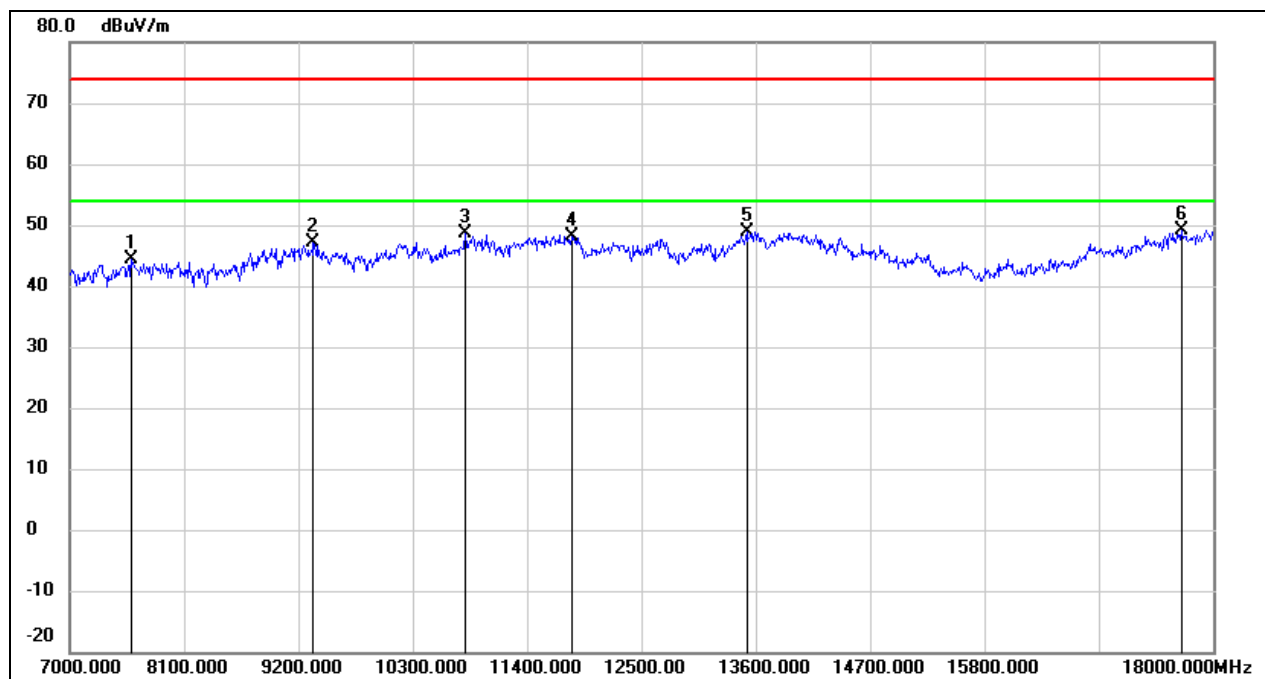


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7594.000        | 37.48          | 6.79           | 44.27           | 74.00          | -29.73      | peak   |
| 2   | 9343.000        | 36.56          | 10.55          | 47.11           | 74.00          | -26.89      | peak   |
| 3   | 10806.000       | 34.60          | 13.98          | 48.58           | 74.00          | -25.42      | peak   |
| 4   | 11829.000       | 30.77          | 17.38          | 48.15           | 74.00          | -25.85      | peak   |
| 5   | 13512.000       | 28.14          | 20.68          | 48.82           | 74.00          | -25.18      | peak   |
| 6   | 17692.000       | 25.09          | 24.01          | 49.10           | 74.00          | -24.90      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT40 | Channel:      | 5230    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

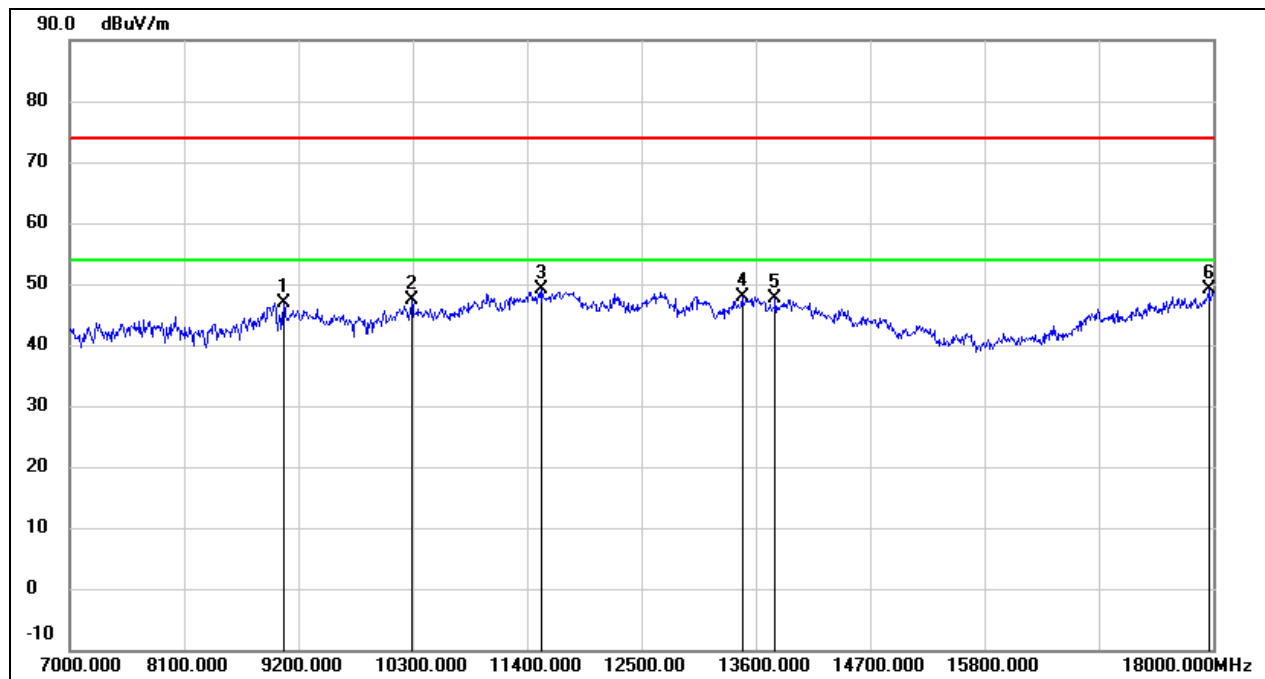


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9057.000        | 36.45          | 10.38          | 46.83           | 74.00          | -27.17      | peak   |
| 2   | 10289.000       | 35.02          | 12.38          | 47.40           | 74.00          | -26.60      | peak   |
| 3   | 11543.000       | 32.25          | 16.84          | 49.09           | 74.00          | -24.91      | peak   |
| 4   | 13468.000       | 27.38          | 20.50          | 47.88           | 74.00          | -26.12      | peak   |
| 5   | 13787.000       | 26.38          | 21.35          | 47.73           | 74.00          | -26.27      | peak   |
| 6   | 17956.000       | 23.20          | 25.82          | 49.02           | 74.00          | -24.98      | peak   |

|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT80 | Channel:      | 5210    |
| Polarity:  | Horizontal     | Test Voltage: | DC 12 V |

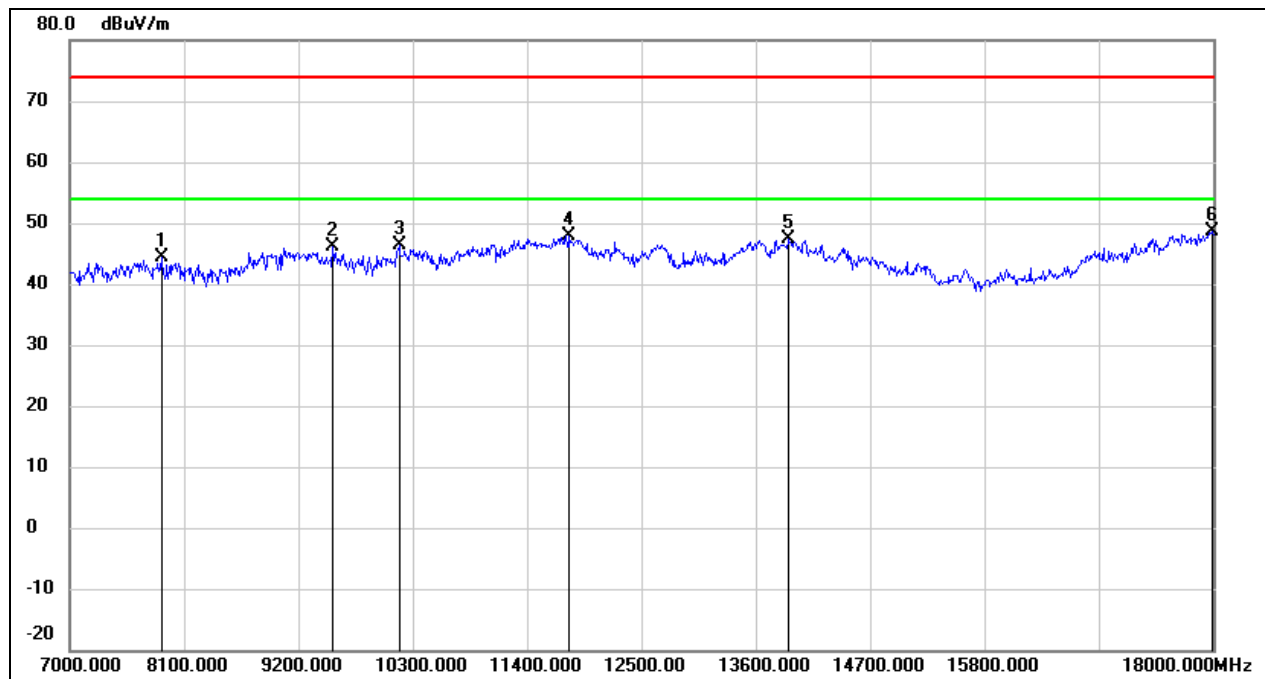

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7880.000        | 37.89          | 6.54           | 44.43           | 74.00          | -29.57      | peak   |
| 2   | 9530.000        | 35.44          | 10.72          | 46.16           | 74.00          | -27.84      | peak   |
| 3   | 10168.000       | 34.13          | 12.13          | 46.26           | 74.00          | -27.74      | peak   |
| 4   | 11807.000       | 30.46          | 17.34          | 47.80           | 74.00          | -26.20      | peak   |
| 5   | 13919.000       | 25.59          | 21.68          | 47.27           | 74.00          | -26.73      | peak   |
| 6   | 17989.000       | 22.57          | 26.04          | 48.61           | 74.00          | -25.39      | peak   |


|            |                |               |         |
|------------|----------------|---------------|---------|
| Test Mode: | 802.11be EHT80 | Channel:      | 5210    |
| Polarity:  | Vertical       | Test Voltage: | DC 12 V |

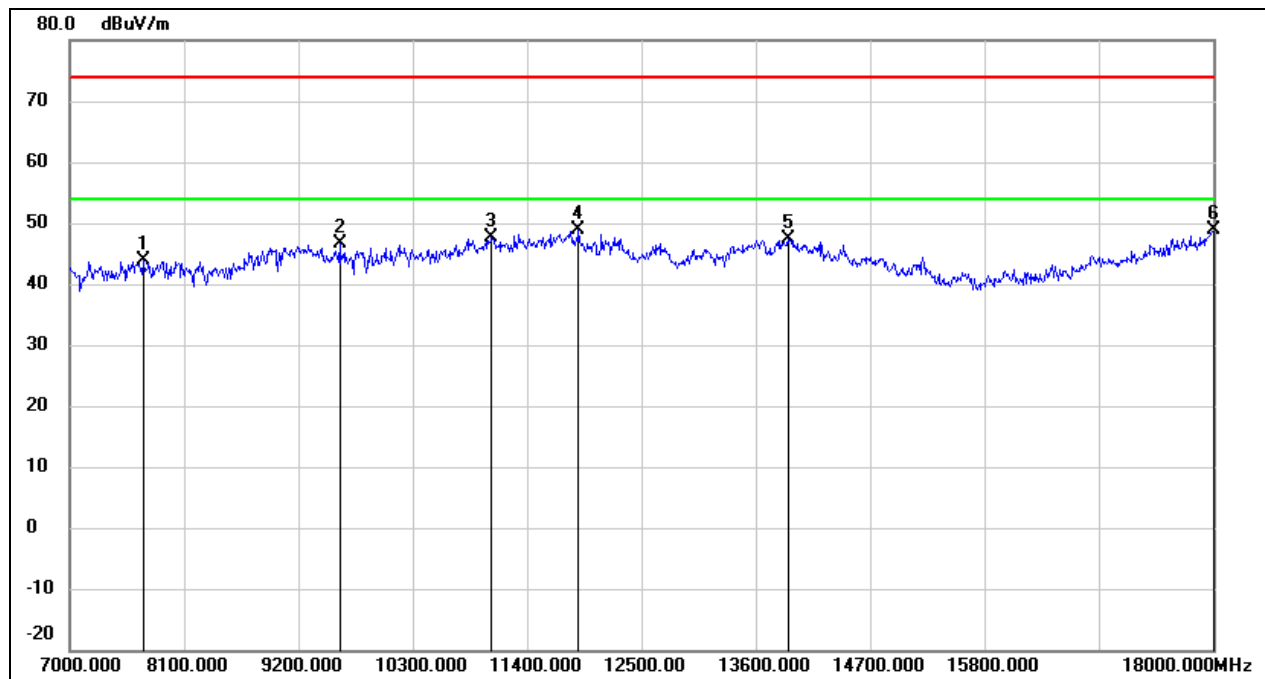

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7704.000        | 37.17          | 6.69           | 43.86           | 74.00          | -30.14      | peak   |
| 2   | 9596.000        | 35.72          | 10.87          | 46.59           | 74.00          | -27.41      | peak   |
| 3   | 11059.000       | 32.59          | 14.96          | 47.55           | 74.00          | -26.45      | peak   |
| 4   | 11895.000       | 31.41          | 17.51          | 48.92           | 74.00          | -25.08      | peak   |
| 5   | 13908.000       | 25.72          | 21.66          | 47.38           | 74.00          | -26.62      | peak   |
| 6   | 18000.000       | 22.73          | 26.12          | 48.85           | 74.00          | -25.15      | peak   |


## 8.7. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

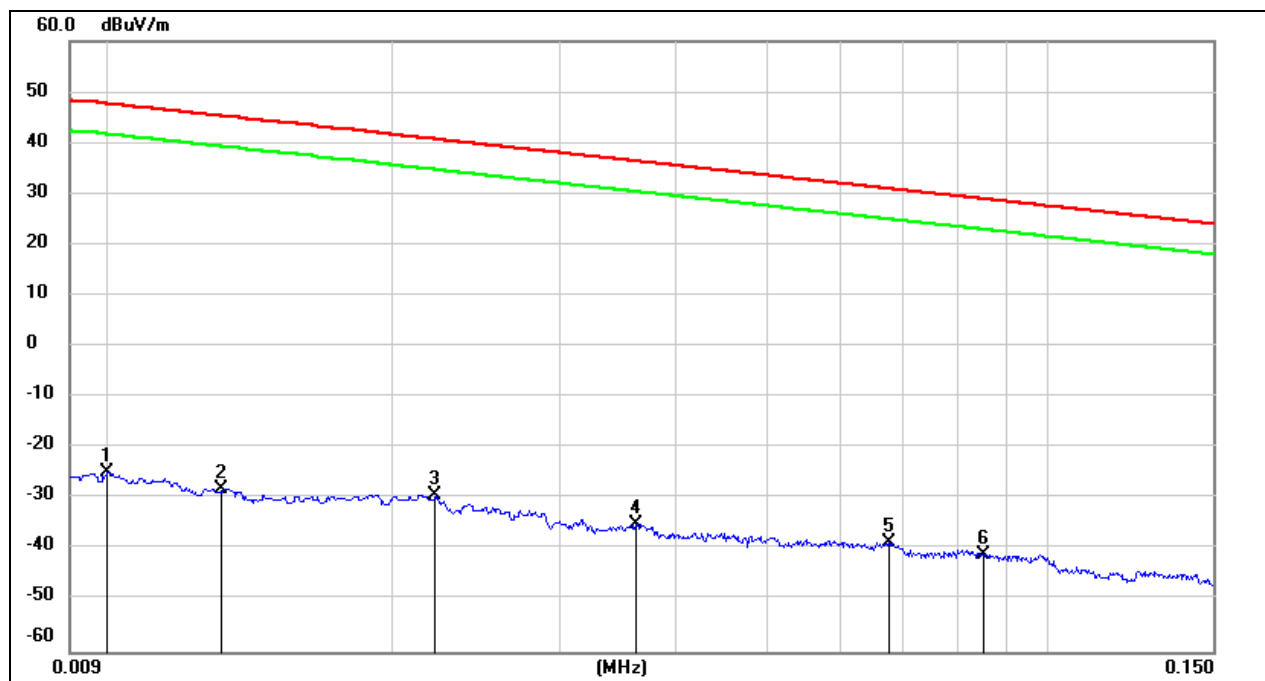


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | FCC<br>Result<br>(dBuV/m) | FCC Limit<br>(dBuV/m) | ISED<br>Result<br>(dBuA/m) | ISED<br>Limit<br>(dBuA/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1   | 0.0100             | 76.72             | -101.40           | -24.68                    | 47.60                 | -76.18                     | -3.90                     | -72.28         | peak   |
| 2   | 0.0131             | 73.47             | -101.38           | -27.91                    | 45.25                 | -79.41                     | -6.25                     | -73.16         | peak   |
| 3   | 0.0221             | 72.13             | -101.35           | -29.22                    | 40.71                 | -80.72                     | -10.79                    | -69.93         | peak   |
| 4   | 0.0362             | 66.51             | -101.42           | -34.91                    | 36.43                 | -86.41                     | -15.07                    | -71.34         | peak   |
| 5   | 0.0675             | 63.14             | -101.56           | -38.42                    | 31.02                 | -89.92                     | -20.48                    | -69.44         | peak   |
| 6   | 0.0854             | 60.85             | -101.68           | -40.83                    | 28.97                 | -92.33                     | -22.53                    | -69.80         | peak   |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

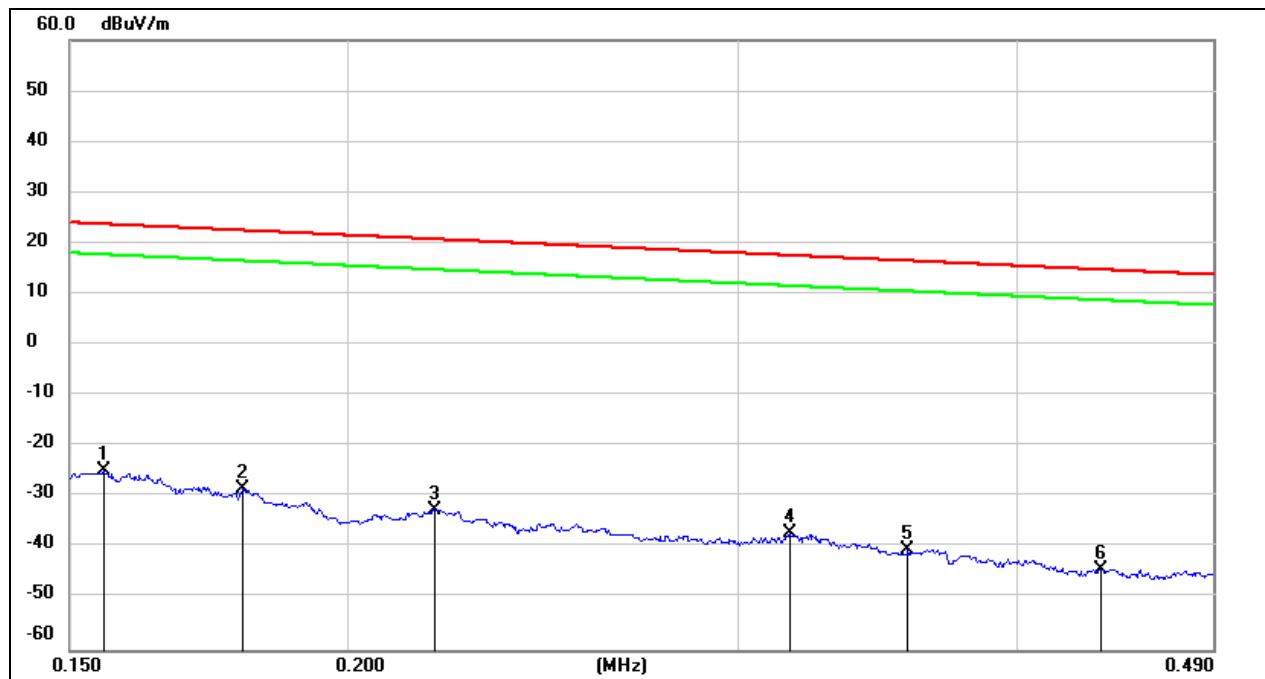

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | FCC<br>Result<br>(dBuV/m) | FCC Limit<br>(dBuV/m) | ISED<br>Result<br>(dBuA/m) | ISED<br>Limit<br>(dBuA/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1   | 0.1554             | 76.77             | -101.65           | -24.88                    | 23.77                 | -76.38                     | -27.73                    | -48.65         | peak   |
| 2   | 0.1794             | 73.27             | -101.68           | -28.41                    | 22.53                 | -79.91                     | -28.97                    | -50.94         | peak   |
| 3   | 0.2190             | 69.27             | -101.75           | -32.48                    | 20.79                 | -83.98                     | -30.71                    | -53.27         | peak   |
| 4   | 0.3163             | 64.70             | -101.87           | -37.17                    | 17.60                 | -88.67                     | -33.90                    | -54.77         | peak   |
| 5   | 0.3573             | 61.58             | -101.91           | -40.33                    | 16.54                 | -91.83                     | -34.96                    | -56.87         | peak   |
| 6   | 0.4364             | 57.86             | -101.99           | -44.13                    | 14.80                 | -95.63                     | -36.70                    | -58.93         | peak   |


|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

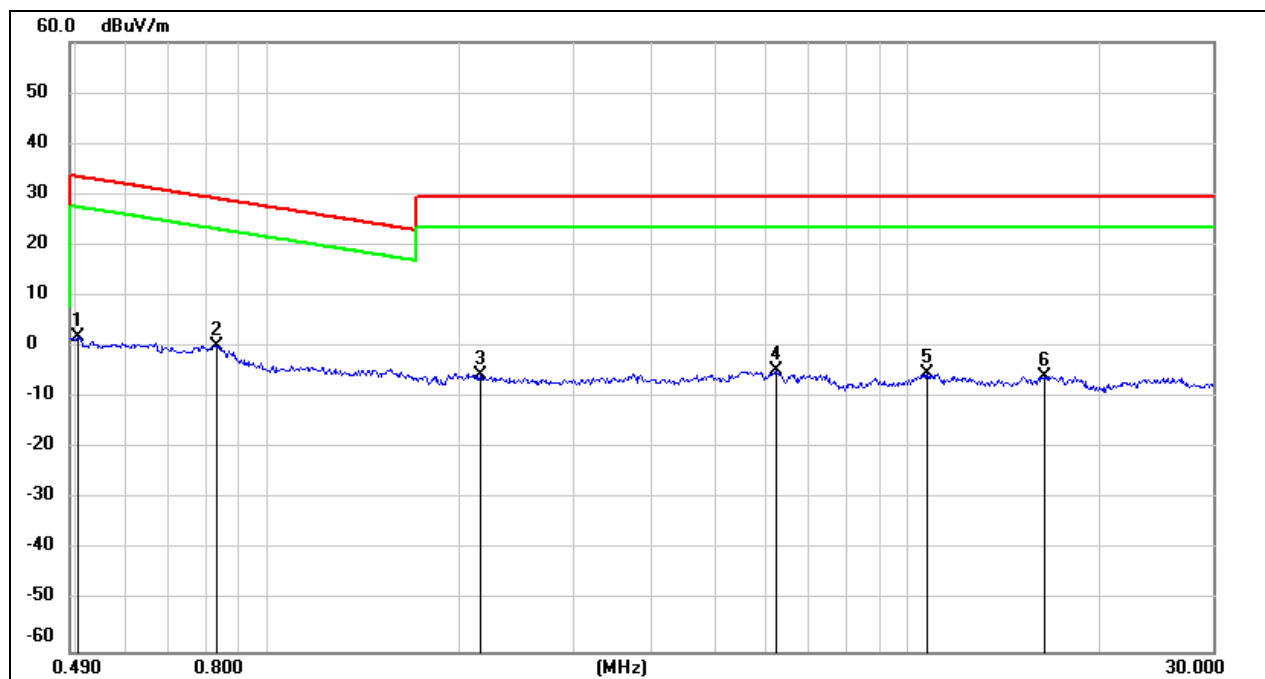

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | FCC<br>Result<br>(dBuV/m) | FCC Limit<br>(dBuV/m) | ISED<br>Result<br>(dBuA/m) | ISED<br>Limit<br>(dBuA/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1   | 0.5039             | 63.93             | -62.07            | 1.86                      | 33.56                 | -49.64                     | -17.94                    | -31.70         | peak   |
| 2   | 0.8296             | 62.44             | -62.17            | 0.27                      | 29.23                 | -51.23                     | -22.27                    | -28.96         | peak   |
| 3   | 2.1463             | 56.27             | -61.79            | -5.52                     | 29.54                 | -57.02                     | -21.96                    | -35.06         | peak   |
| 4   | 6.2445             | 56.63             | -61.32            | -4.69                     | 29.54                 | -56.19                     | -21.96                    | -34.23         | peak   |
| 5   | 10.7299            | 55.48             | -60.83            | -5.35                     | 29.54                 | -56.85                     | -21.96                    | -34.89         | peak   |
| 6   | 16.3959            | 55.17             | -60.96            | -5.79                     | 29.54                 | -57.29                     | -21.96                    | -35.33         | peak   |


## 8.8. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

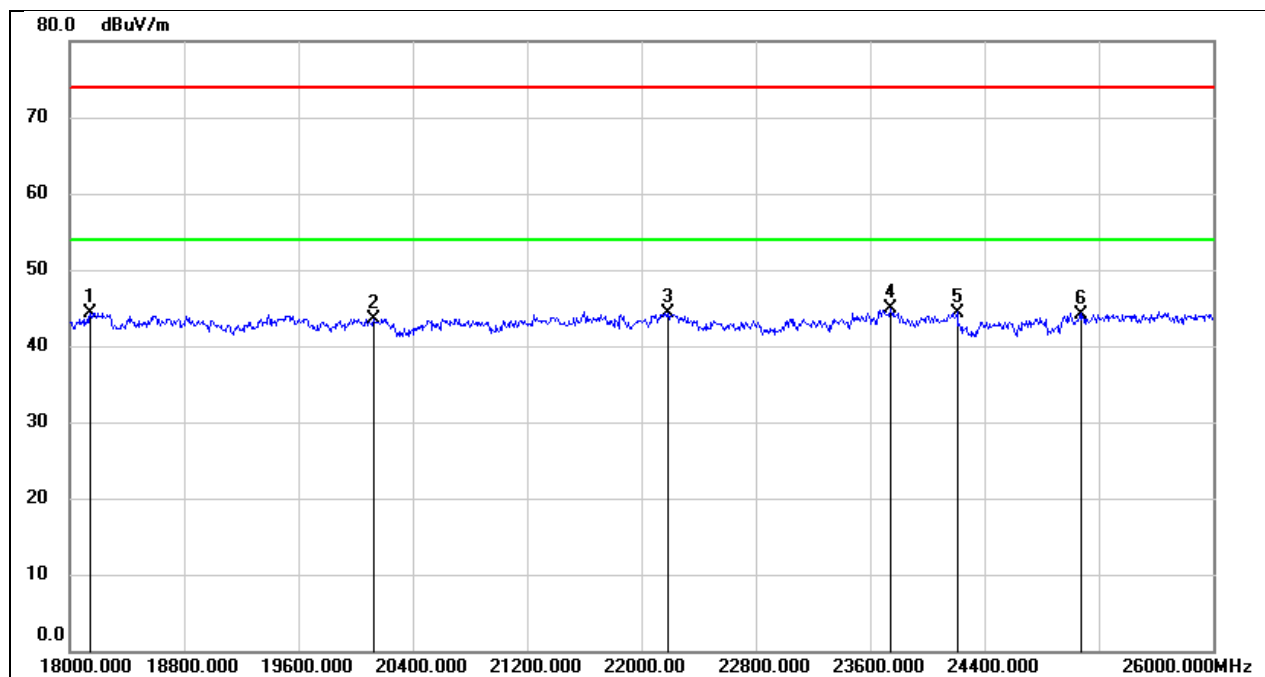

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 18144.000       | 49.77          | -5.48          | 44.29           | 74.00          | -29.71      | peak   |
| 2   | 20128.000       | 49.12          | -5.53          | 43.59           | 74.00          | -30.41      | peak   |
| 3   | 22184.000       | 48.68          | -4.29          | 44.39           | 74.00          | -29.61      | peak   |
| 4   | 23744.000       | 48.15          | -3.20          | 44.95           | 74.00          | -29.05      | peak   |
| 5   | 24208.000       | 47.21          | -2.81          | 44.40           | 74.00          | -29.60      | peak   |
| 6   | 25072.000       | 46.17          | -1.97          | 44.20           | 74.00          | -29.80      | peak   |


|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

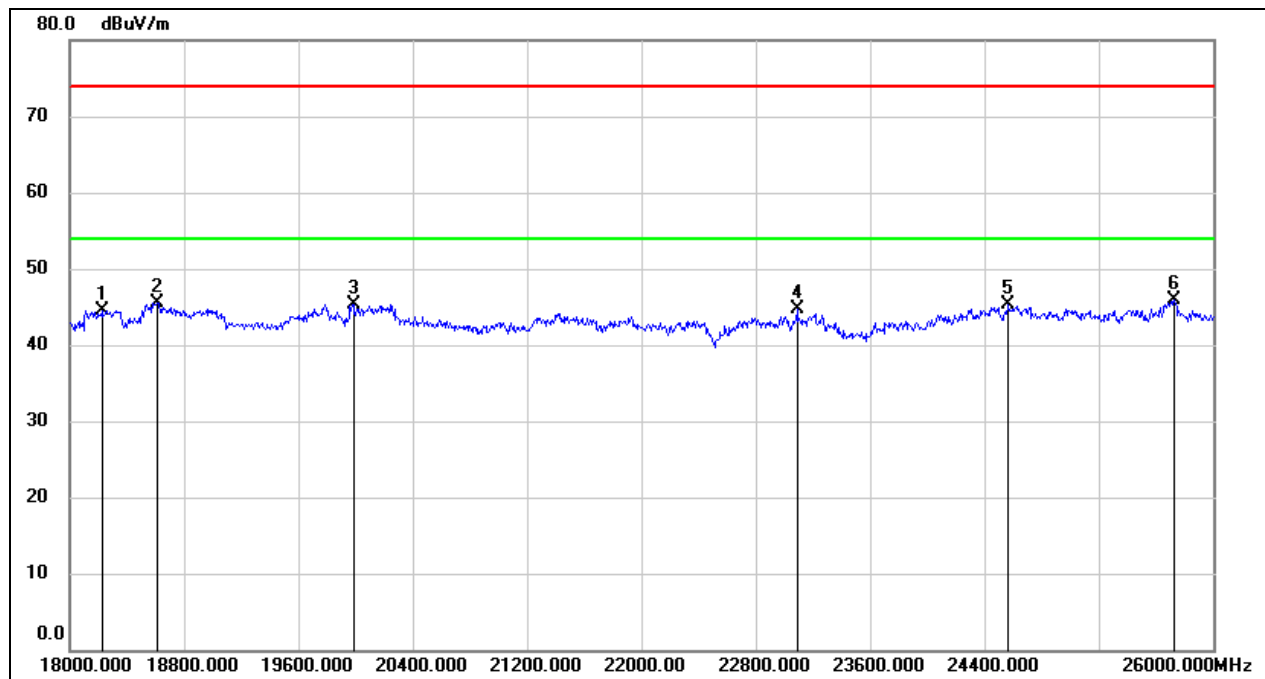

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 18224.000          | 50.08             | -5.53             | 44.55              | 74.00             | -29.45         | peak   |
| 2   | 18616.000          | 50.89             | -5.34             | 45.55              | 74.00             | -28.45         | peak   |
| 3   | 19984.000          | 50.71             | -5.44             | 45.27              | 74.00             | -28.73         | peak   |
| 4   | 23088.000          | 48.02             | -3.41             | 44.61              | 74.00             | -29.39         | peak   |
| 5   | 24568.000          | 47.60             | -2.33             | 45.27              | 74.00             | -28.73         | peak   |
| 6   | 25728.000          | 46.61             | -0.72             | 45.89              | 74.00             | -28.11         | peak   |


## 8.9. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

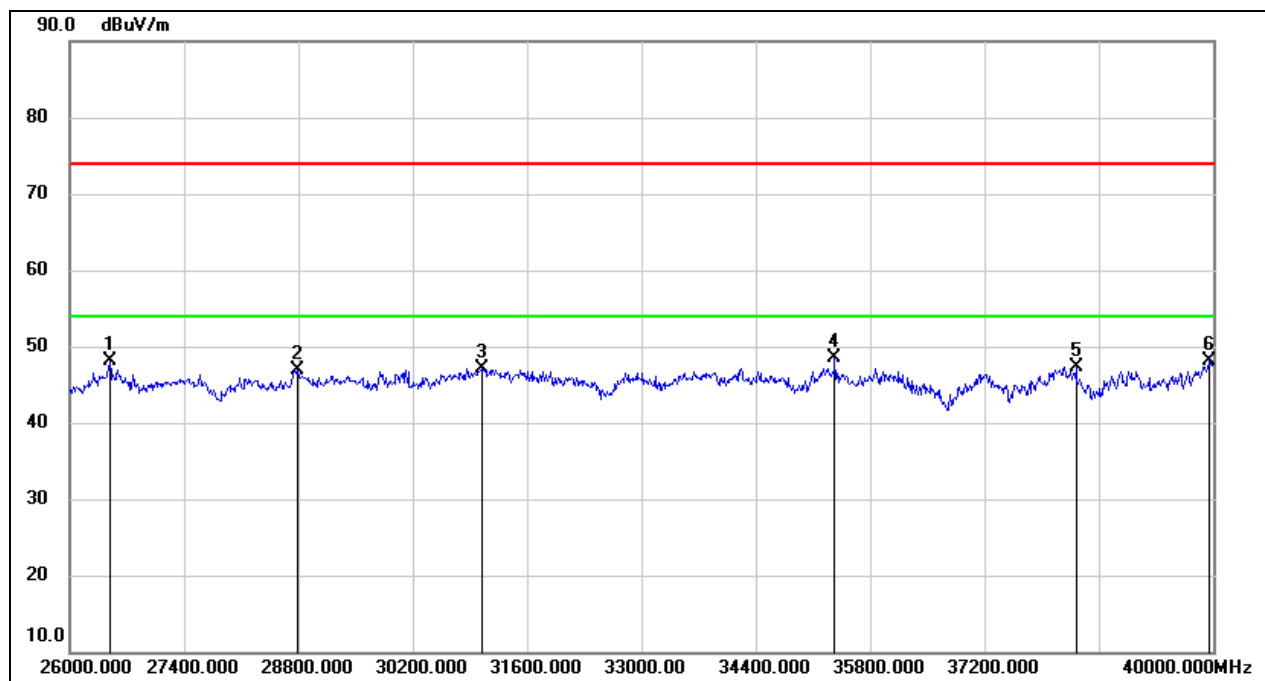

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 26490.000          | 52.79             | -4.74             | 48.05              | 74.00             | -25.95         | peak   |
| 2   | 28786.000          | 47.49             | -0.64             | 46.85              | 74.00             | -27.15         | peak   |
| 3   | 31054.000          | 47.78             | -0.72             | 47.06              | 74.00             | -26.94         | peak   |
| 4   | 35366.000          | 45.90             | 2.59              | 48.49              | 74.00             | -25.51         | peak   |
| 5   | 38320.000          | 43.56             | 3.77              | 47.33              | 74.00             | -26.67         | peak   |
| 6   | 39958.000          | 43.08             | 5.12              | 48.20              | 74.00             | -25.80         | peak   |


|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

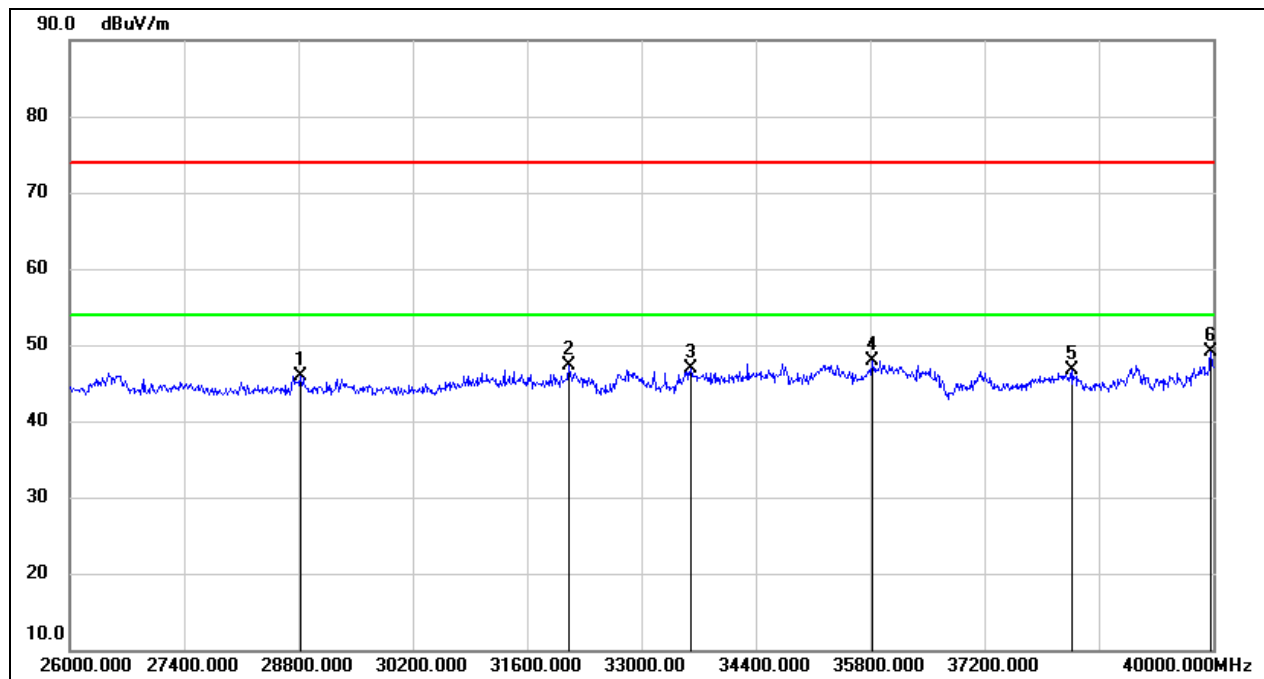

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 28828.000       | 46.63          | -0.79          | 45.84           | 74.00          | -28.16      | peak   |
| 2   | 32104.000       | 48.99          | -1.75          | 47.24           | 74.00          | -26.76      | peak   |
| 3   | 33602.000       | 46.51          | 0.46           | 46.97           | 74.00          | -27.03      | peak   |
| 4   | 35828.000       | 44.25          | 3.67           | 47.92           | 74.00          | -26.08      | peak   |
| 5   | 38278.000       | 42.82          | 3.82           | 46.64           | 74.00          | -27.36      | peak   |
| 6   | 39972.000       | 43.95          | 5.13           | 49.08           | 74.00          | -24.92      | peak   |


## 8.10. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Horizontal | Test Voltage: | DC 12 V |

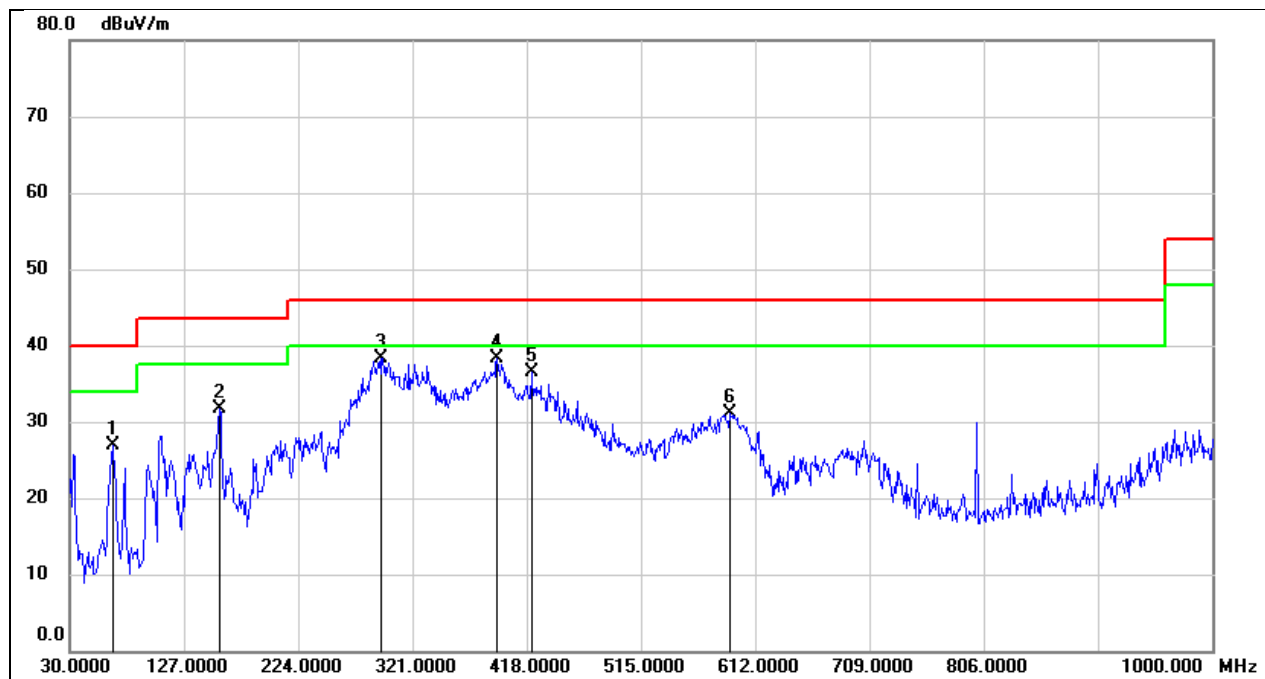

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 66.8600         | 47.43          | -20.56         | 26.87           | 40.00          | -13.13      | QP     |
| 2   | 157.0700        | 49.70          | -17.92         | 31.78           | 43.50          | -11.72      | QP     |
| 3   | 294.8100        | 54.01          | -15.61         | 38.40           | 46.00          | -7.60       | QP     |
| 4   | 392.7800        | 51.79          | -13.46         | 38.33           | 46.00          | -7.67       | QP     |
| 5   | 421.8800        | 49.52          | -12.94         | 36.58           | 46.00          | -9.42       | QP     |
| 6   | 590.6599        | 40.93          | -9.80          | 31.13           | 46.00          | -14.87      | QP     |

|            |            |               |         |
|------------|------------|---------------|---------|
| Test Mode: | 802.11a 20 | Channel:      | 5180    |
| Polarity:  | Vertical   | Test Voltage: | DC 12 V |

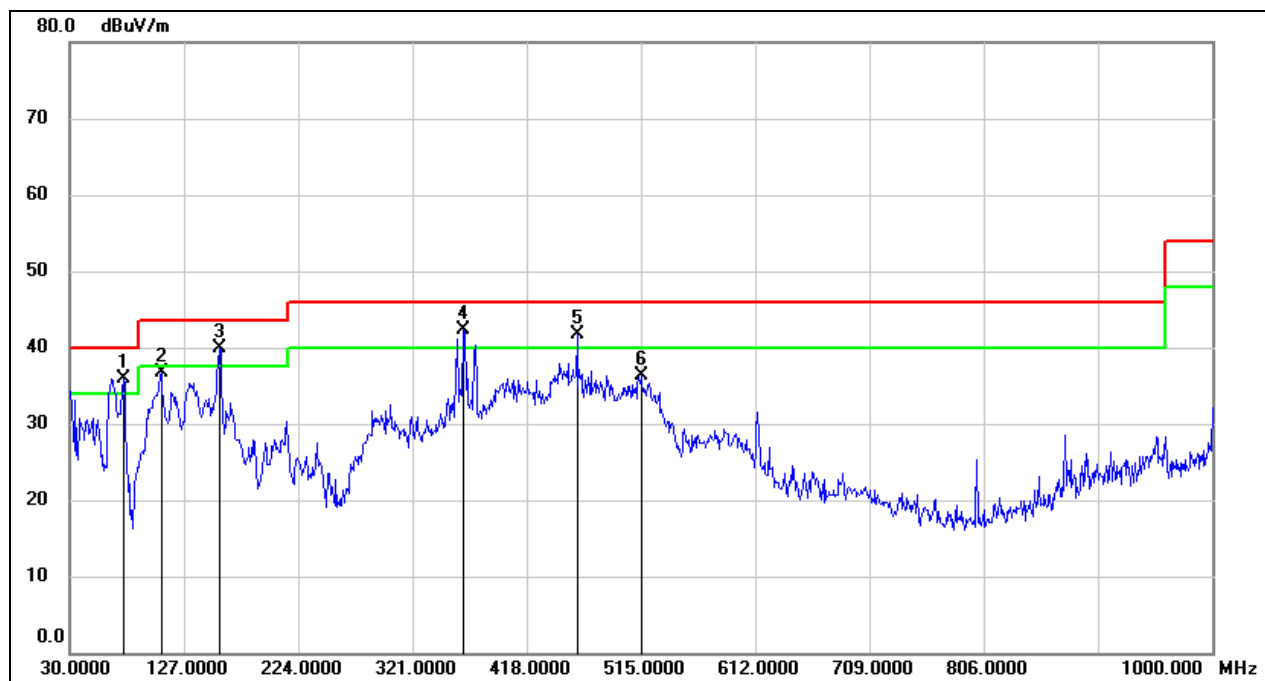


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 75.5899         | 56.87          | -20.99         | 35.88           | 40.00          | -4.12       | QP     |
| 2   | 107.6000        | 57.24          | -20.58         | 36.66           | 43.50          | -6.84       | QP     |
| 3   | 157.0700        | 57.91          | -17.92         | 39.99           | 43.50          | -3.51       | QP     |
| 4   | 363.6800        | 56.45          | -14.05         | 42.40           | 46.00          | -3.60       | QP     |
| 5   | 460.6800        | 53.73          | -12.11         | 41.62           | 46.00          | -4.38       | QP     |
| 6   | 515.0000        | 47.57          | -11.17         | 36.40           | 46.00          | -9.60       | QP     |

## 8.11. SIMULTANEOUSLY TRANSMISSION SPURIOUS EMISSIONS


(1 GHz~18 GHz) (Worst case)

|            |                                                                 |               |         |
|------------|-----------------------------------------------------------------|---------------|---------|
| Test Mode: | WIFI 2.4G 802.11b Mode 2437 MHz & WIFI 5G 802.11a Mode 5745 MHz |               |         |
| Polarity:  | Horizontal                                                      | Test Voltage: | DC 12 V |

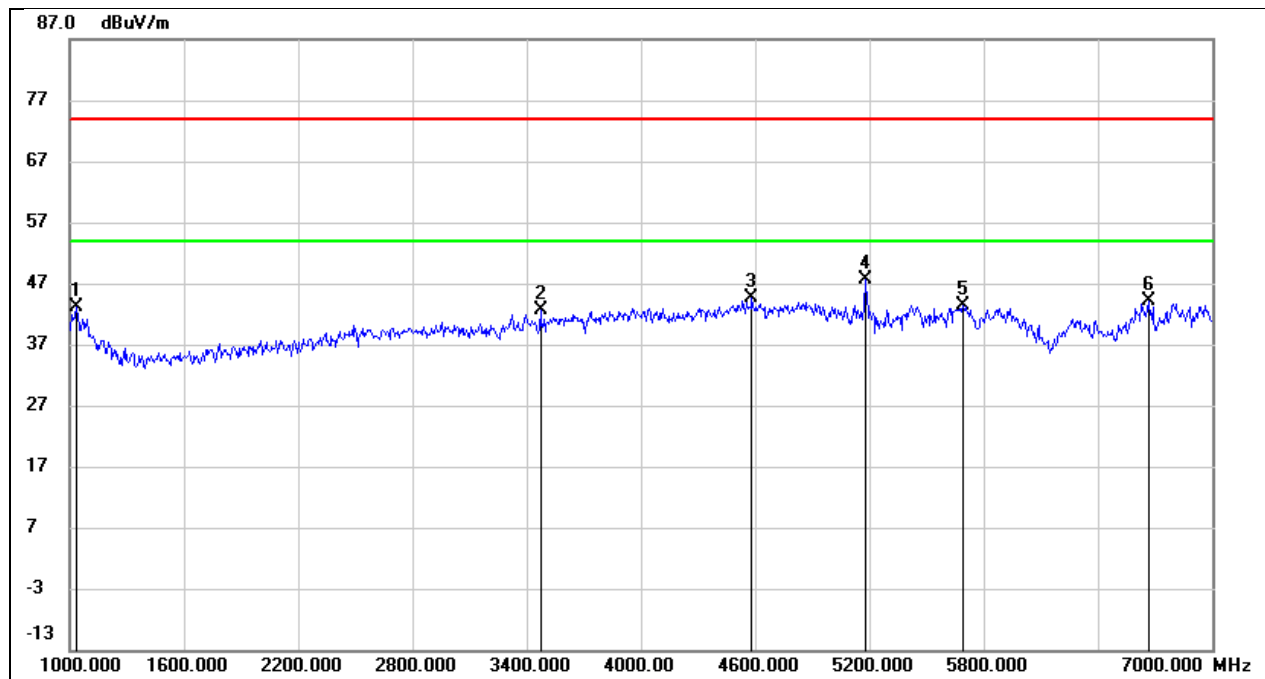


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 1036.000        | 58.00          | -14.87         | 43.13           | 74.00          | -30.87      | peak   |
| 2   | 3472.000        | 48.66          | -5.91          | 42.75           | 74.00          | -31.25      | peak   |
| 3   | 4582.000        | 46.34          | -1.82          | 44.52           | 74.00          | -29.48      | peak   |
| 4   | 5176.000        | 47.62          | 0.05           | 47.67           | 74.00          | -26.33      | peak   |
| 5   | 5692.000        | 42.42          | 0.97           | 43.39           | 74.00          | -30.61      | peak   |
| 6   | 6664.000        | 39.57          | 4.54           | 44.11           | 74.00          | -29.89      | peak   |

|            |                                                                 |               |         |
|------------|-----------------------------------------------------------------|---------------|---------|
| Test Mode: | WIFI 2.4G 802.11b Mode 2437 MHz & WIFI 5G 802.11a Mode 5745 MHz |               |         |
| Polarity:  | Vertical                                                        | Test Voltage: | DC 12 V |

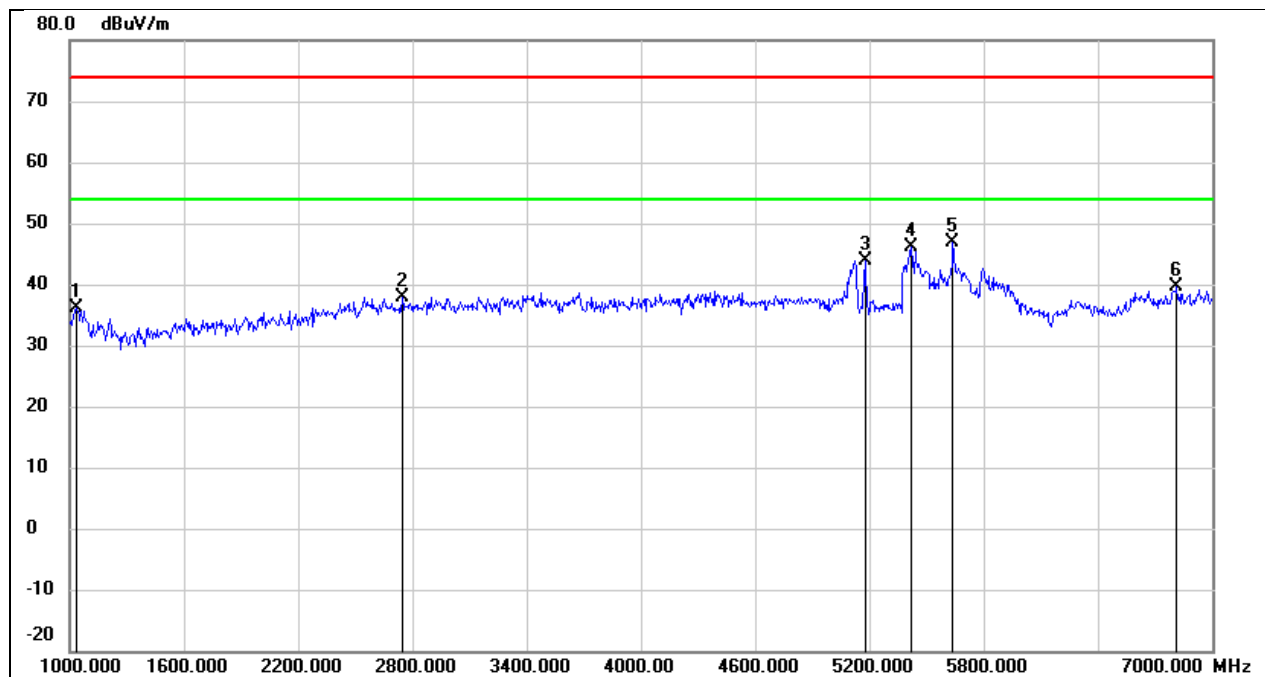


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 1036.000        | 50.94          | -14.87         | 36.07           | 74.00          | -37.93      | peak   |
| 2   | 2746.000        | 45.73          | -7.75          | 37.98           | 74.00          | -36.02      | peak   |
| 3   | 5176.000        | 43.88          | 0.05           | 43.93           | 74.00          | -30.07      | peak   |
| 4   | 5416.000        | 45.89          | 0.32           | 46.21           | 74.00          | -27.79      | peak   |
| 5   | 5638.000        | 46.13          | 0.81           | 46.94           | 74.00          | -27.06      | peak   |
| 6   | 6814.000        | 34.24          | 5.28           | 39.52           | 74.00          | -34.48      | peak   |

|            |                                                                 |               |         |
|------------|-----------------------------------------------------------------|---------------|---------|
| Test Mode: | WIFI 2.4G 802.11b Mode 2437 MHz & WIFI 5G 802.11a Mode 5745 MHz |               |         |
| Polarity:  | Horizontal                                                      | Test Voltage: | DC 12 V |

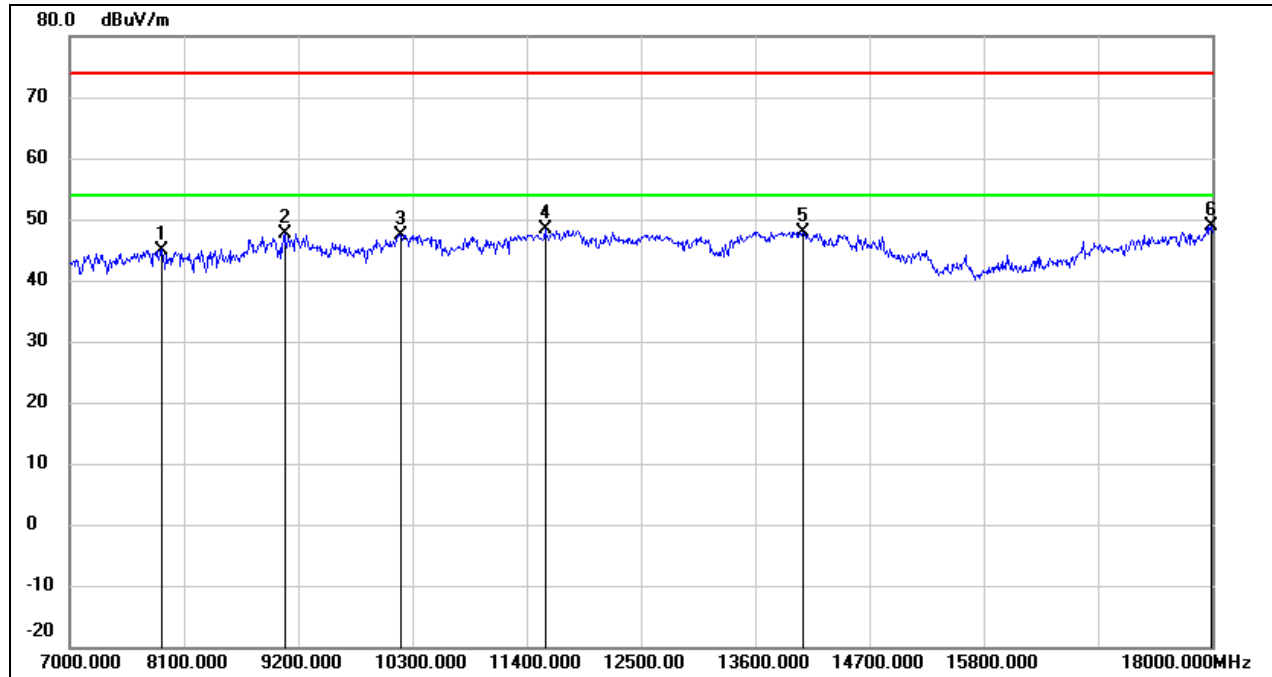

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7880.000        | 38.46          | 6.54           | 45.00           | 74.00          | -29.00      | peak   |
| 2   | 9068.000        | 37.23          | 10.39          | 47.62           | 74.00          | -26.38      | peak   |
| 3   | 10190.000       | 35.28          | 12.18          | 47.46           | 74.00          | -26.54      | peak   |
| 4   | 11576.000       | 31.38          | 16.91          | 48.29           | 74.00          | -25.71      | peak   |
| 5   | 14062.000       | 26.36          | 21.62          | 47.98           | 74.00          | -26.02      | peak   |
| 6   | 17989.000       | 22.82          | 26.04          | 48.86           | 74.00          | -25.14      | peak   |

|            |                                                                 |               |         |
|------------|-----------------------------------------------------------------|---------------|---------|
| Test Mode: | WIFI 2.4G 802.11b Mode 2437 MHz & WIFI 5G 802.11a Mode 5745 MHz |               |         |
| Polarity:  | Vertical                                                        | Test Voltage: | DC 12 V |

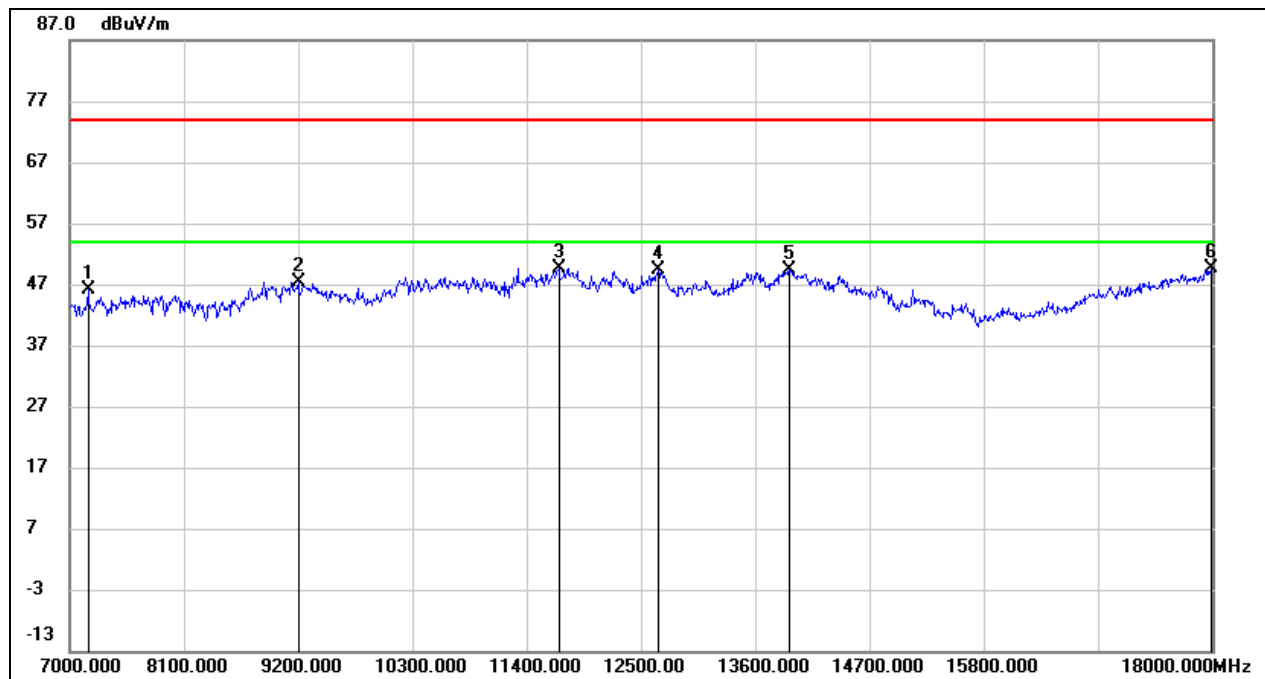

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7176.000        | 39.08          | 6.98           | 46.06           | 74.00          | -27.94      | peak   |
| 2   | 9200.000        | 37.02          | 10.46          | 47.48           | 74.00          | -26.52      | peak   |
| 3   | 11708.000       | 32.56          | 17.16          | 49.72           | 74.00          | -24.28      | peak   |
| 4   | 12665.000       | 31.44          | 18.04          | 49.48           | 74.00          | -24.52      | peak   |
| 5   | 13930.000       | 27.77          | 21.71          | 49.48           | 74.00          | -24.52      | peak   |
| 6   | 17989.000       | 23.56          | 26.04          | 49.60           | 74.00          | -24.40      | peak   |

## 9. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Quasi-peak | Average   |
|-----------------|------------|-----------|
| 0.15 -0.5       | 66 - 56 *  | 56 - 46 * |
| 0.50 -5.0       | 56.00      | 46.00     |
| 5.0 -30.0       | 60.00      | 50.00     |


### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

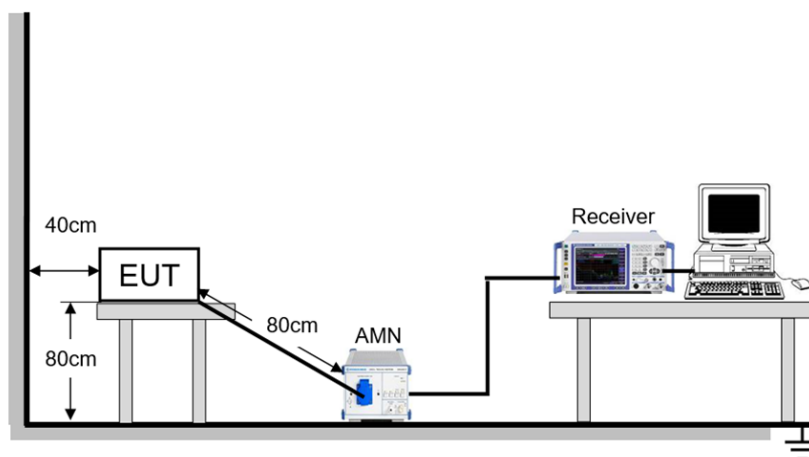

**TEST ENVIRONMENT**


|                     |        |                   |                 |
|---------------------|--------|-------------------|-----------------|
| Temperature         | 24.4℃  | Relative Humidity | 72.2%           |
| Atmosphere Pressure | 101kPa | Test Voltage      | AC 120 V, 60 Hz |

**TEST DATE / ENGINEER**

|           |                |         |           |
|-----------|----------------|---------|-----------|
| Test Date | March 23, 2023 | Test By | Wite Chen |
|-----------|----------------|---------|-----------|

## TEST RESULTS

|            |           |               |                 |
|------------|-----------|---------------|-----------------|
| Test Mode: | 802.11a20 | Channel:      | 5180            |
| Line:      | Line      | Test Voltage: | AC 120 V, 60 Hz |

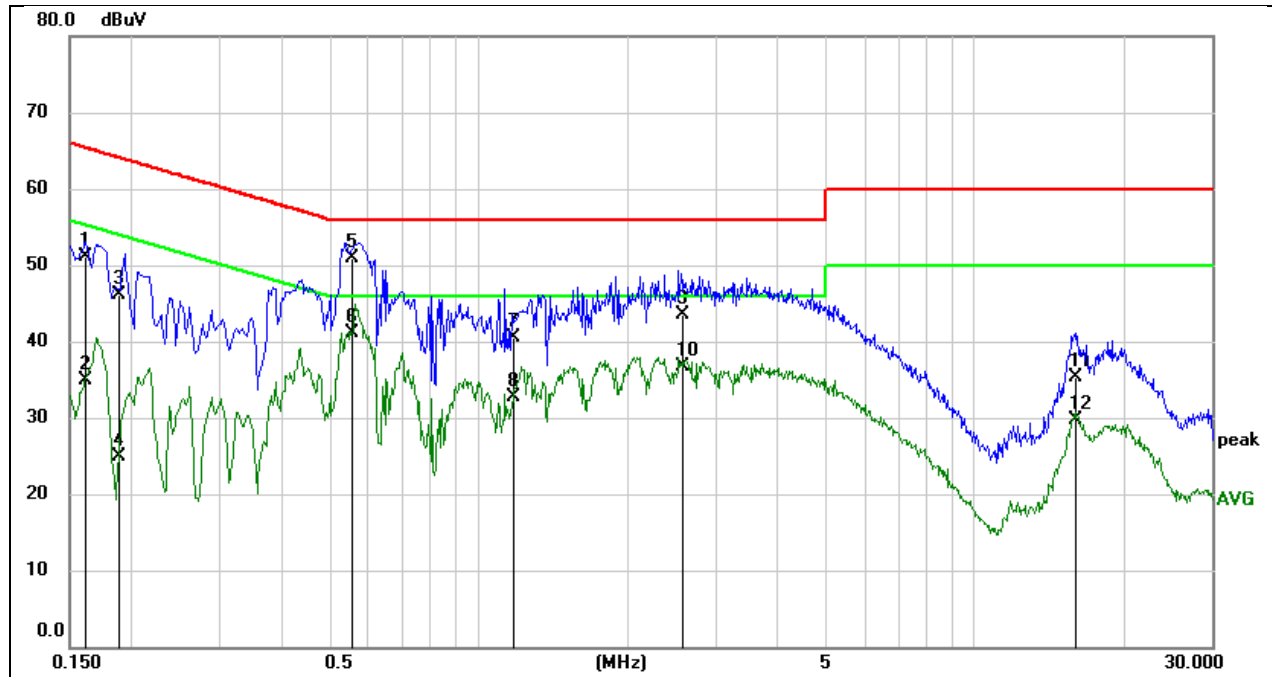


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|--------|
| 1   | 0.1620          | 41.42          | 9.59         | 51.01         | 65.36        | -14.35      | QP     |
| 2   | 0.1620          | 25.27          | 9.59         | 34.86         | 55.36        | -20.50      | AVG    |
| 3   | 0.1894          | 36.44          | 9.59         | 46.03         | 64.06        | -18.03      | QP     |
| 4   | 0.1894          | 15.23          | 9.59         | 24.82         | 54.06        | -29.24      | AVG    |
| 5   | 0.5552          | 41.24          | 9.60         | 50.84         | 56.00        | -5.16       | QP     |
| 6   | 0.5552          | 31.57          | 9.60         | 41.17         | 46.00        | -4.83       | AVG    |
| 7   | 1.1818          | 30.89          | 9.61         | 40.50         | 56.00        | -15.50      | QP     |
| 8   | 1.1818          | 23.19          | 9.61         | 32.80         | 46.00        | -13.20      | AVG    |
| 9   | 2.5749          | 33.84          | 9.65         | 43.49         | 56.00        | -12.51      | QP     |
| 10  | 2.5749          | 27.15          | 9.65         | 36.80         | 46.00        | -9.20       | AVG    |
| 11  | 16.0220         | 25.65          | 9.75         | 35.40         | 60.00        | -24.60      | QP     |
| 12  | 16.0220         | 19.90          | 9.75         | 29.65         | 50.00        | -20.35      | AVG    |

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

|            |           |               |                 |
|------------|-----------|---------------|-----------------|
| Test Mode: | 802.11a20 | Channel:      | 5180            |
| Line:      | Neutral   | Test Voltage: | AC 120 V, 60 Hz |

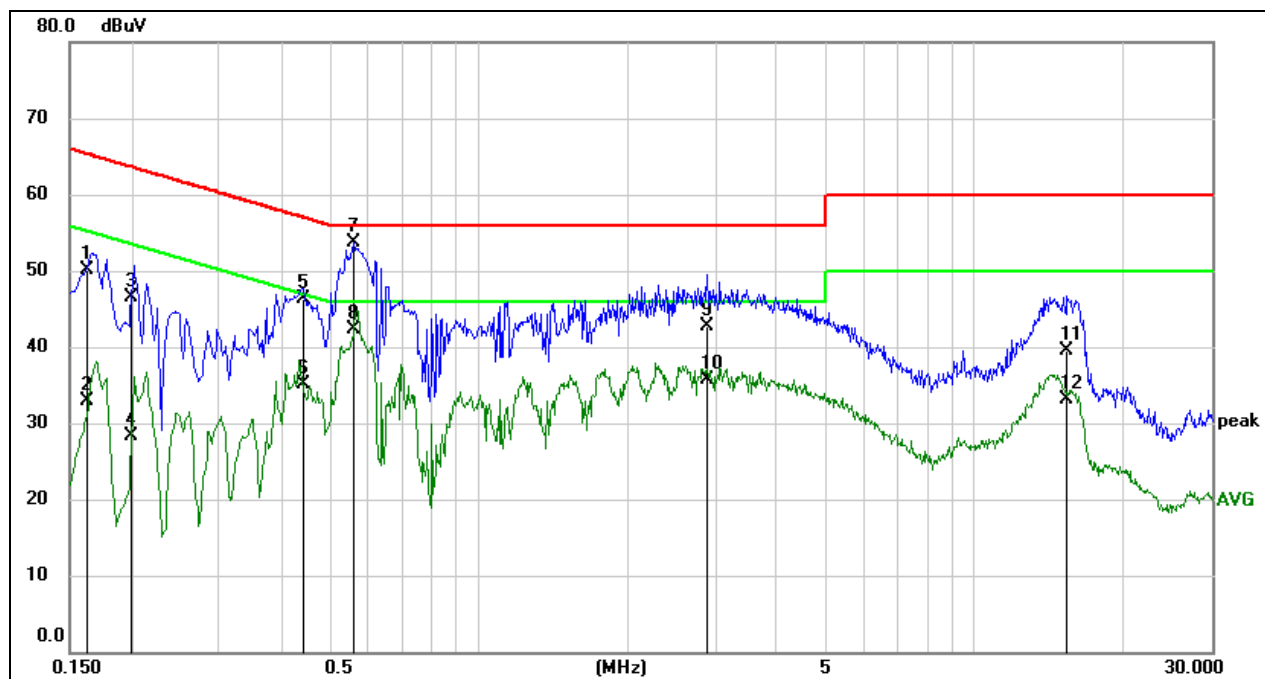

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-----------------|------------------|-----------------|----------------|--------|
| 1   | 0.1621             | 40.61             | 9.51            | 50.12            | 65.36           | -15.24         | QP     |
| 2   | 0.1621             | 23.37             | 9.51            | 32.88            | 55.36           | -22.48         | AVG    |
| 3   | 0.1993             | 36.83             | 9.59            | 46.42            | 63.64           | -17.22         | QP     |
| 4   | 0.1993             | 18.78             | 9.59            | 28.37            | 53.64           | -25.27         | AVG    |
| 5   | 0.4423             | 36.70             | 9.52            | 46.22            | 57.02           | -10.80         | QP     |
| 6   | 0.4423             | 25.57             | 9.52            | 35.09            | 47.02           | -11.93         | AVG    |
| 7   | 0.5620             | 44.25             | 9.50            | 53.75            | 56.00           | -2.25          | QP     |
| 8   | 0.5620             | 32.79             | 9.50            | 42.29            | 46.00           | -3.71          | AVG    |
| 9   | 2.8843             | 33.15             | 9.62            | 42.77            | 56.00           | -13.23         | QP     |
| 10  | 2.8843             | 26.14             | 9.62            | 35.76            | 46.00           | -10.24         | AVG    |
| 11  | 15.2552            | 29.88             | 9.65            | 39.53            | 60.00           | -20.47         | QP     |
| 12  | 15.2552            | 23.48             | 9.65            | 33.13            | 50.00           | -16.87         | AVG    |

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 11. TEST DATA

### 11.1. APPENDIX A: EMISSION BANDWIDTH

#### 11.1.1. Test Result


| Test Mode  | Antenna | Channel | 26db EBW [MHz] | FL[MHz] | FH[MHz] | Verdict |
|------------|---------|---------|----------------|---------|---------|---------|
| 11A-CDD    | Ant1    | 5180    | 22.28          | 5168.92 | 5191.20 | PASS    |
|            | Ant3    | 5180    | 22.56          | 5168.96 | 5191.52 | PASS    |
|            | Ant5    | 5180    | 22.24          | 5168.80 | 5191.04 | PASS    |
|            | Ant7    | 5180    | 22.48          | 5168.80 | 5191.28 | PASS    |
|            | Ant1    | 5200    | 22.44          | 5188.84 | 5211.28 | PASS    |
|            | Ant3    | 5200    | 22.52          | 5189.00 | 5211.52 | PASS    |
|            | Ant5    | 5200    | 22.48          | 5188.60 | 5211.08 | PASS    |
|            | Ant7    | 5200    | 22.40          | 5188.84 | 5211.24 | PASS    |
|            | Ant1    | 5240    | 22.36          | 5228.84 | 5251.20 | PASS    |
|            | Ant3    | 5240    | 22.60          | 5229.00 | 5251.60 | PASS    |
|            | Ant5    | 5240    | 22.16          | 5228.92 | 5251.08 | PASS    |
|            | Ant7    | 5240    | 22.28          | 5228.76 | 5251.04 | PASS    |
|            | Ant1    | 5745    | 23.04          | 5733.28 | 5756.32 | PASS    |
|            | Ant3    | 5745    | 22.56          | 5734.04 | 5756.60 | PASS    |
|            | Ant5    | 5745    | 22.52          | 5733.80 | 5756.32 | PASS    |
|            | Ant7    | 5745    | 22.84          | 5733.48 | 5756.32 | PASS    |
|            | Ant1    | 5785    | 23.00          | 5773.24 | 5796.24 | PASS    |
|            | Ant3    | 5785    | 22.52          | 5774.00 | 5796.52 | PASS    |
|            | Ant5    | 5785    | 22.92          | 5773.68 | 5796.60 | PASS    |
|            | Ant7    | 5785    | 22.48          | 5773.84 | 5796.32 | PASS    |
| 11AX20MIMO | Ant1    | 5825    | 22.96          | 5813.28 | 5836.24 | PASS    |
|            | Ant3    | 5825    | 23.00          | 5813.64 | 5836.64 | PASS    |
|            | Ant5    | 5825    | 22.36          | 5813.80 | 5836.16 | PASS    |
|            | Ant7    | 5825    | 22.56          | 5813.68 | 5836.24 | PASS    |
|            | Ant1    | 5180    | 23.00          | 5168.60 | 5191.60 | PASS    |
|            | Ant3    | 5180    | 22.84          | 5168.68 | 5191.52 | PASS    |
|            | Ant5    | 5180    | 22.96          | 5168.64 | 5191.60 | PASS    |
|            | Ant7    | 5180    | 23.00          | 5168.68 | 5191.68 | PASS    |
|            | Ant1    | 5200    | 22.88          | 5188.60 | 5211.48 | PASS    |
|            | Ant3    | 5200    | 22.76          | 5188.72 | 5211.48 | PASS    |
|            | Ant5    | 5200    | 23.32          | 5188.32 | 5211.64 | PASS    |
|            | Ant7    | 5200    | 22.72          | 5188.80 | 5211.52 | PASS    |
|            | Ant1    | 5240    | 23.12          | 5228.52 | 5251.64 | PASS    |
|            | Ant3    | 5240    | 22.68          | 5228.64 | 5251.32 | PASS    |
|            | Ant5    | 5240    | 23.04          | 5228.60 | 5251.64 | PASS    |
|            | Ant7    | 5240    | 22.80          | 5228.68 | 5251.48 | PASS    |
|            | Ant1    | 5745    | 23.56          | 5733.20 | 5756.76 | PASS    |
|            | Ant3    | 5745    | 22.68          | 5733.64 | 5756.32 | PASS    |
|            | Ant5    | 5745    | 23.44          | 5733.28 | 5756.72 | PASS    |
|            | Ant7    | 5745    | 22.96          | 5733.64 | 5756.60 | PASS    |
|            | Ant1    | 5785    | 23.52          | 5773.08 | 5796.60 | PASS    |
|            | Ant3    | 5785    | 22.84          | 5773.60 | 5796.44 | PASS    |
|            | Ant5    | 5785    | 23.48          | 5773.24 | 5796.72 | PASS    |
|            | Ant7    | 5785    | 22.76          | 5773.68 | 5796.44 | PASS    |
|            | Ant1    | 5825    | 23.32          | 5813.44 | 5836.76 | PASS    |
|            | Ant3    | 5825    | 23.12          | 5813.44 | 5836.56 | PASS    |
|            | Ant5    | 5825    | 23.36          | 5813.32 | 5836.68 | PASS    |
|            | Ant7    | 5825    | 23.32          | 5813.36 | 5836.68 | PASS    |


|            |      |      |       |         |         |      |
|------------|------|------|-------|---------|---------|------|
| 11AX40MIMO | Ant1 | 5190 | 45.12 | 5167.36 | 5212.48 | PASS |
|            | Ant3 | 5190 | 44.88 | 5167.60 | 5212.48 | PASS |
|            | Ant5 | 5190 | 44.08 | 5167.84 | 5211.92 | PASS |
|            | Ant7 | 5190 | 43.76 | 5168.08 | 5211.84 | PASS |
|            | Ant1 | 5230 | 44.48 | 5207.60 | 5252.08 | PASS |
|            | Ant3 | 5230 | 43.92 | 5208.16 | 5252.08 | PASS |
|            | Ant5 | 5230 | 44.08 | 5208.32 | 5252.40 | PASS |
|            | Ant7 | 5230 | 43.52 | 5208.24 | 5251.76 | PASS |
|            | Ant1 | 5755 | 45.44 | 5732.36 | 5777.80 | PASS |
|            | Ant3 | 5755 | 45.44 | 5732.12 | 5777.56 | PASS |
|            | Ant5 | 5755 | 45.52 | 5732.28 | 5777.80 | PASS |
|            | Ant7 | 5755 | 44.00 | 5732.92 | 5776.92 | PASS |
|            | Ant1 | 5795 | 45.60 | 5772.36 | 5817.96 | PASS |
|            | Ant3 | 5795 | 44.48 | 5772.92 | 5817.40 | PASS |
|            | Ant5 | 5795 | 45.12 | 5772.28 | 5817.40 | PASS |
| 11AX80MIMO | Ant7 | 5795 | 43.76 | 5773.32 | 5817.08 | PASS |
|            | Ant1 | 5210 | 88.64 | 5165.68 | 5254.32 | PASS |
|            | Ant3 | 5210 | 90.88 | 5165.04 | 5255.92 | PASS |
|            | Ant5 | 5210 | 88.80 | 5166.16 | 5254.96 | PASS |
|            | Ant7 | 5210 | 90.24 | 5164.56 | 5254.80 | PASS |
|            | Ant1 | 5775 | 88.00 | 5731.00 | 5819.00 | PASS |
|            | Ant3 | 5775 | 90.40 | 5729.40 | 5819.80 | PASS |
|            | Ant5 | 5775 | 88.00 | 5730.36 | 5818.36 | PASS |
|            | Ant7 | 5775 | 90.08 | 5730.20 | 5820.28 | PASS |

|            |      |      |       |         |         |      |
|------------|------|------|-------|---------|---------|------|
| 11BE20MIMO | Ant1 | 5180 | 22.68 | 5168.72 | 5191.40 | PASS |
|            | Ant3 | 5180 | 23.32 | 5167.72 | 5191.04 | PASS |
|            | Ant5 | 5180 | 22.68 | 5168.36 | 5191.04 | PASS |
|            | Ant7 | 5180 | 22.88 | 5169.00 | 5191.88 | PASS |
|            | Ant1 | 5200 | 23.04 | 5188.36 | 5211.40 | PASS |
|            | Ant3 | 5200 | 22.60 | 5188.80 | 5211.40 | PASS |
|            | Ant5 | 5200 | 23.20 | 5188.60 | 5211.80 | PASS |
|            | Ant7 | 5200 | 23.16 | 5188.52 | 5211.68 | PASS |
|            | Ant1 | 5240 | 22.12 | 5228.92 | 5251.04 | PASS |
|            | Ant3 | 5240 | 22.16 | 5228.92 | 5251.08 | PASS |
|            | Ant5 | 5240 | 23.08 | 5228.68 | 5251.76 | PASS |
|            | Ant7 | 5240 | 22.40 | 5228.76 | 5251.16 | PASS |
|            | Ant1 | 5745 | 21.92 | 5733.92 | 5755.84 | PASS |
|            | Ant3 | 5745 | 22.20 | 5733.84 | 5756.04 | PASS |
|            | Ant5 | 5745 | 21.60 | 5734.20 | 5755.80 | PASS |
|            | Ant7 | 5745 | 23.68 | 5733.28 | 5756.96 | PASS |
|            | Ant1 | 5785 | 22.56 | 5773.32 | 5795.88 | PASS |
|            | Ant3 | 5785 | 22.76 | 5773.68 | 5796.44 | PASS |
|            | Ant5 | 5785 | 22.72 | 5773.32 | 5796.04 | PASS |
|            | Ant7 | 5785 | 22.96 | 5773.32 | 5796.28 | PASS |
|            | Ant1 | 5825 | 23.28 | 5813.36 | 5836.64 | PASS |
|            | Ant3 | 5825 | 22.60 | 5813.44 | 5836.04 | PASS |
|            | Ant5 | 5825 | 22.24 | 5813.92 | 5836.16 | PASS |
|            | Ant7 | 5825 | 23.52 | 5813.32 | 5836.84 | PASS |


|            |      |      |       |         |         |      |
|------------|------|------|-------|---------|---------|------|
| 11BE40MIMO | Ant1 | 5190 | 44.88 | 5167.60 | 5212.48 | PASS |
|            | Ant3 | 5190 | 45.20 | 5167.68 | 5212.88 | PASS |
|            | Ant5 | 5190 | 43.92 | 5168.08 | 5212.00 | PASS |
|            | Ant7 | 5190 | 44.32 | 5167.60 | 5211.92 | PASS |
|            | Ant1 | 5230 | 43.60 | 5208.32 | 5251.92 | PASS |
|            | Ant3 | 5230 | 44.40 | 5208.16 | 5252.56 | PASS |
|            | Ant5 | 5230 | 43.44 | 5208.64 | 5252.08 | PASS |
|            | Ant7 | 5230 | 45.60 | 5207.36 | 5252.96 | PASS |
|            | Ant1 | 5755 | 44.48 | 5732.92 | 5777.40 | PASS |
|            | Ant3 | 5755 | 44.88 | 5732.76 | 5777.64 | PASS |
|            | Ant5 | 5755 | 45.36 | 5732.20 | 5777.56 | PASS |
|            | Ant7 | 5755 | 44.48 | 5732.84 | 5777.32 | PASS |
|            | Ant1 | 5795 | 45.36 | 5772.28 | 5817.64 | PASS |
|            | Ant3 | 5795 | 44.64 | 5772.52 | 5817.16 | PASS |
|            | Ant5 | 5795 | 44.80 | 5772.28 | 5817.08 | PASS |
| 11BE80MIMO | Ant7 | 5795 | 44.24 | 5772.84 | 5817.08 | PASS |
|            | Ant1 | 5210 | 88.00 | 5165.68 | 5253.68 | PASS |
|            | Ant3 | 5210 | 90.56 | 5165.68 | 5256.24 | PASS |
|            | Ant5 | 5210 | 89.12 | 5165.36 | 5254.48 | PASS |
|            | Ant7 | 5210 | 89.44 | 5165.36 | 5254.80 | PASS |
|            | Ant1 | 5775 | 87.20 | 5731.48 | 5818.68 | PASS |
|            | Ant3 | 5775 | 90.88 | 5729.72 | 5820.60 | PASS |
|            | Ant5 | 5775 | 91.84 | 5728.28 | 5820.12 | PASS |
|            | Ant7 | 5775 | 89.28 | 5730.20 | 5819.48 | PASS |

## 11.1.2. Test Graphs

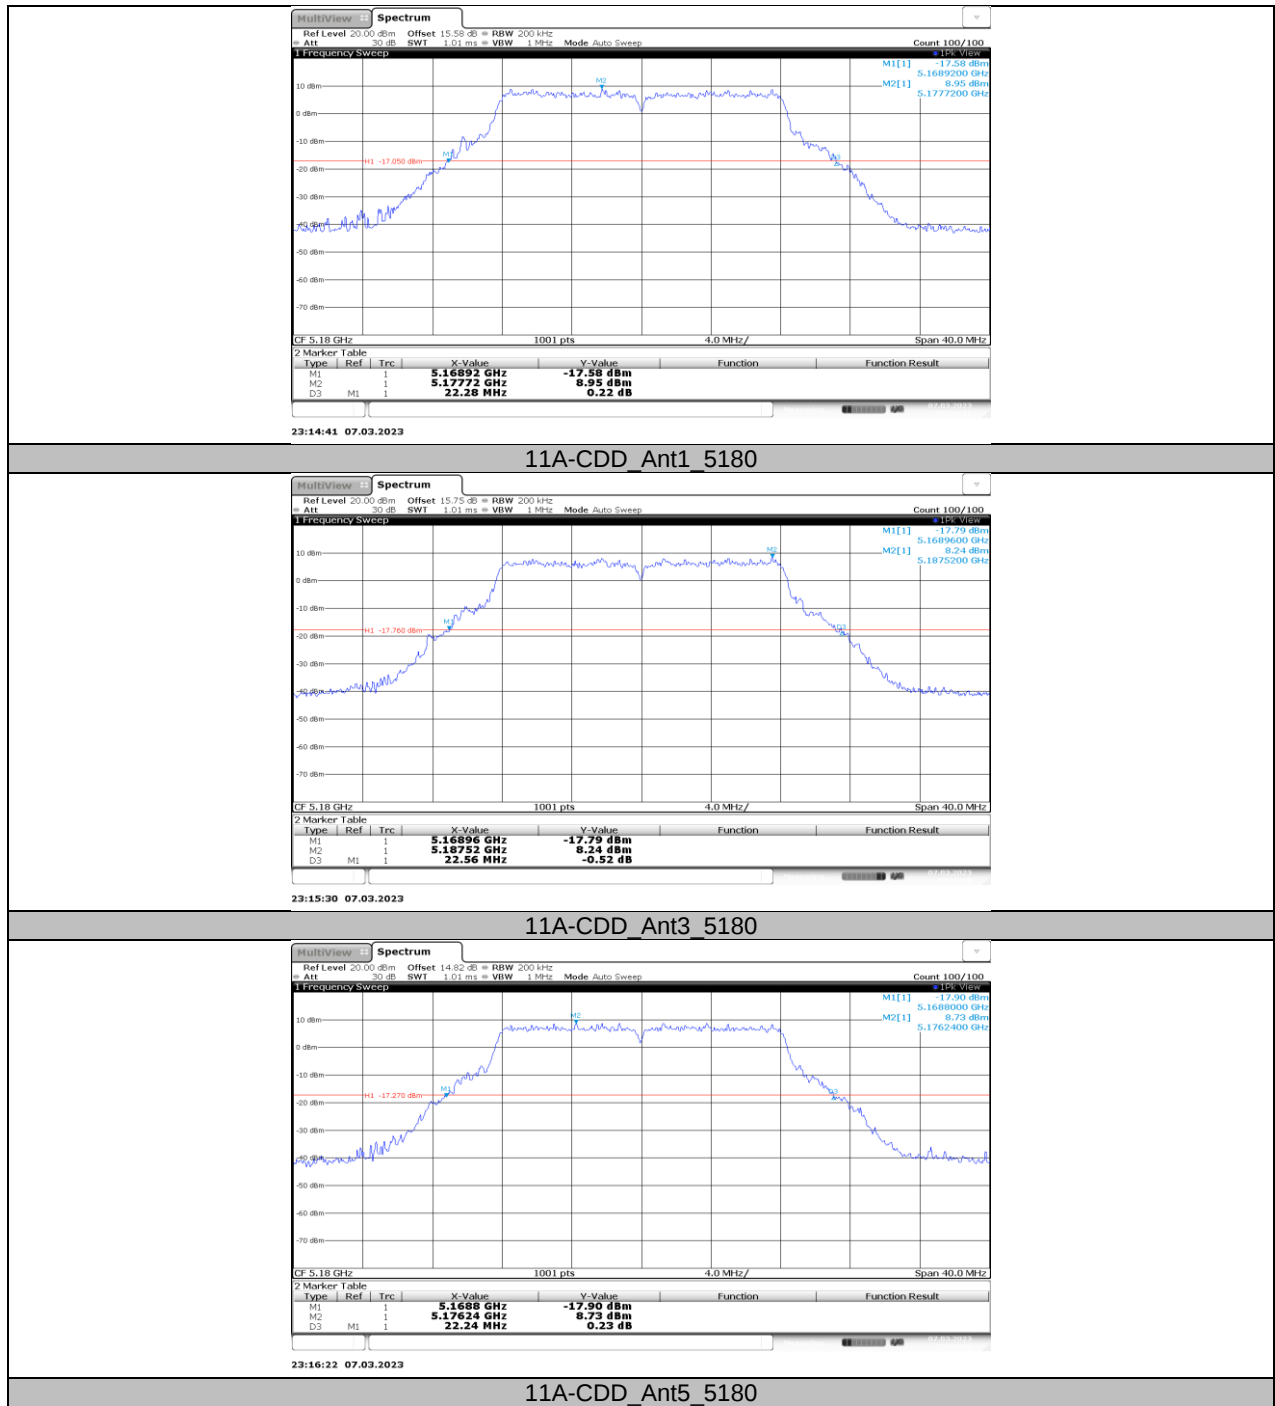


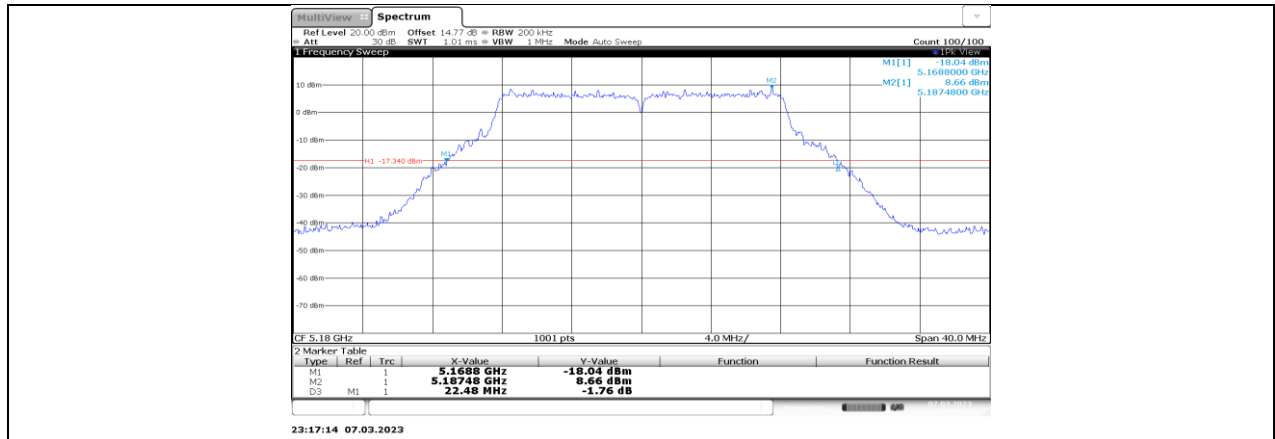


11A-CDD\_Ant7\_5180

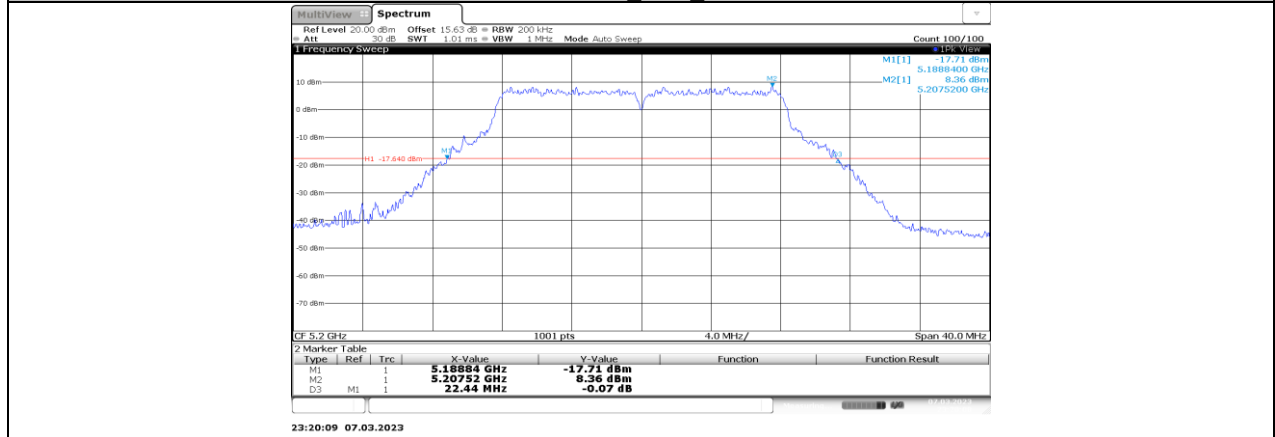


11A-CDD\_Ant1\_5200

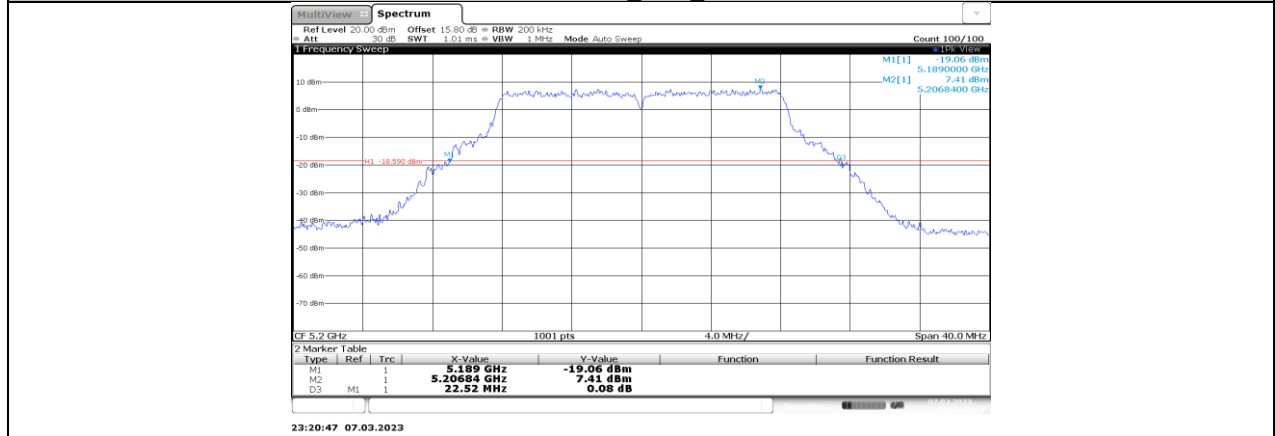


11A-CDD\_Ant3\_5200

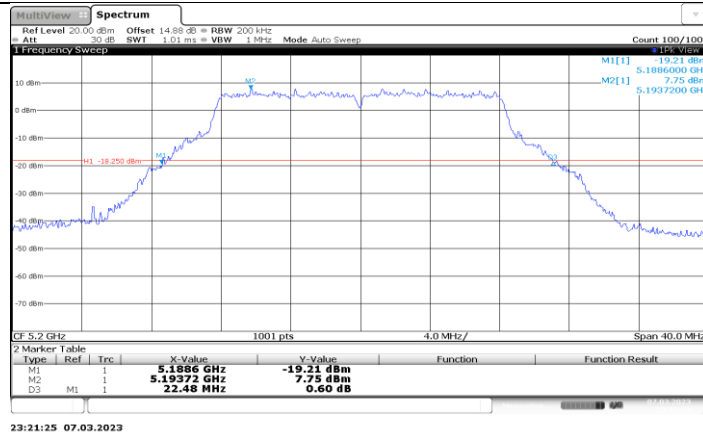


11A-CDD\_Ant5\_5200

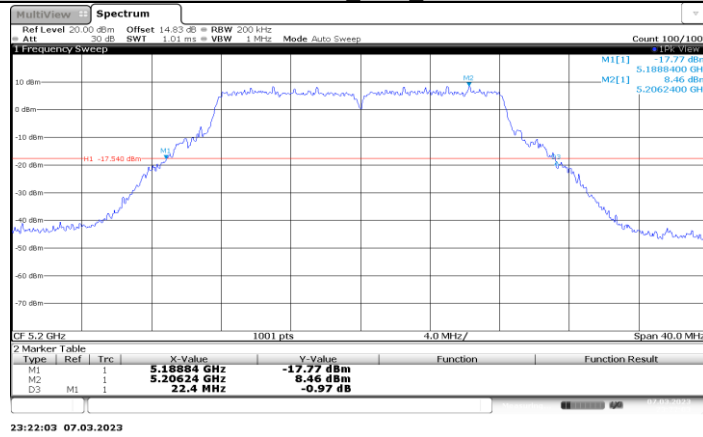


11A-CDD\_Ant7\_5200

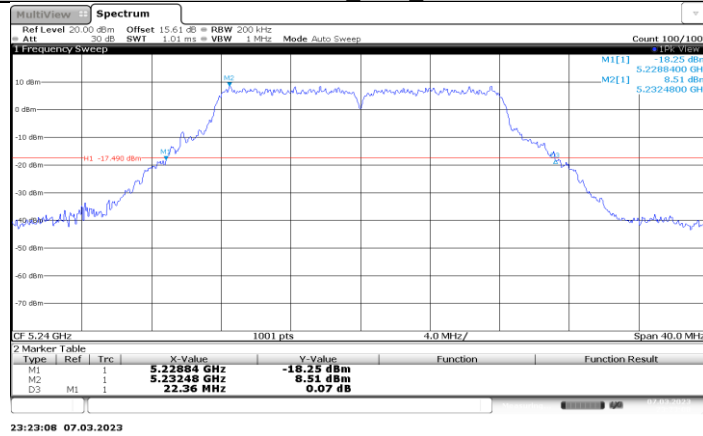


11A-CDD\_Ant1\_5240

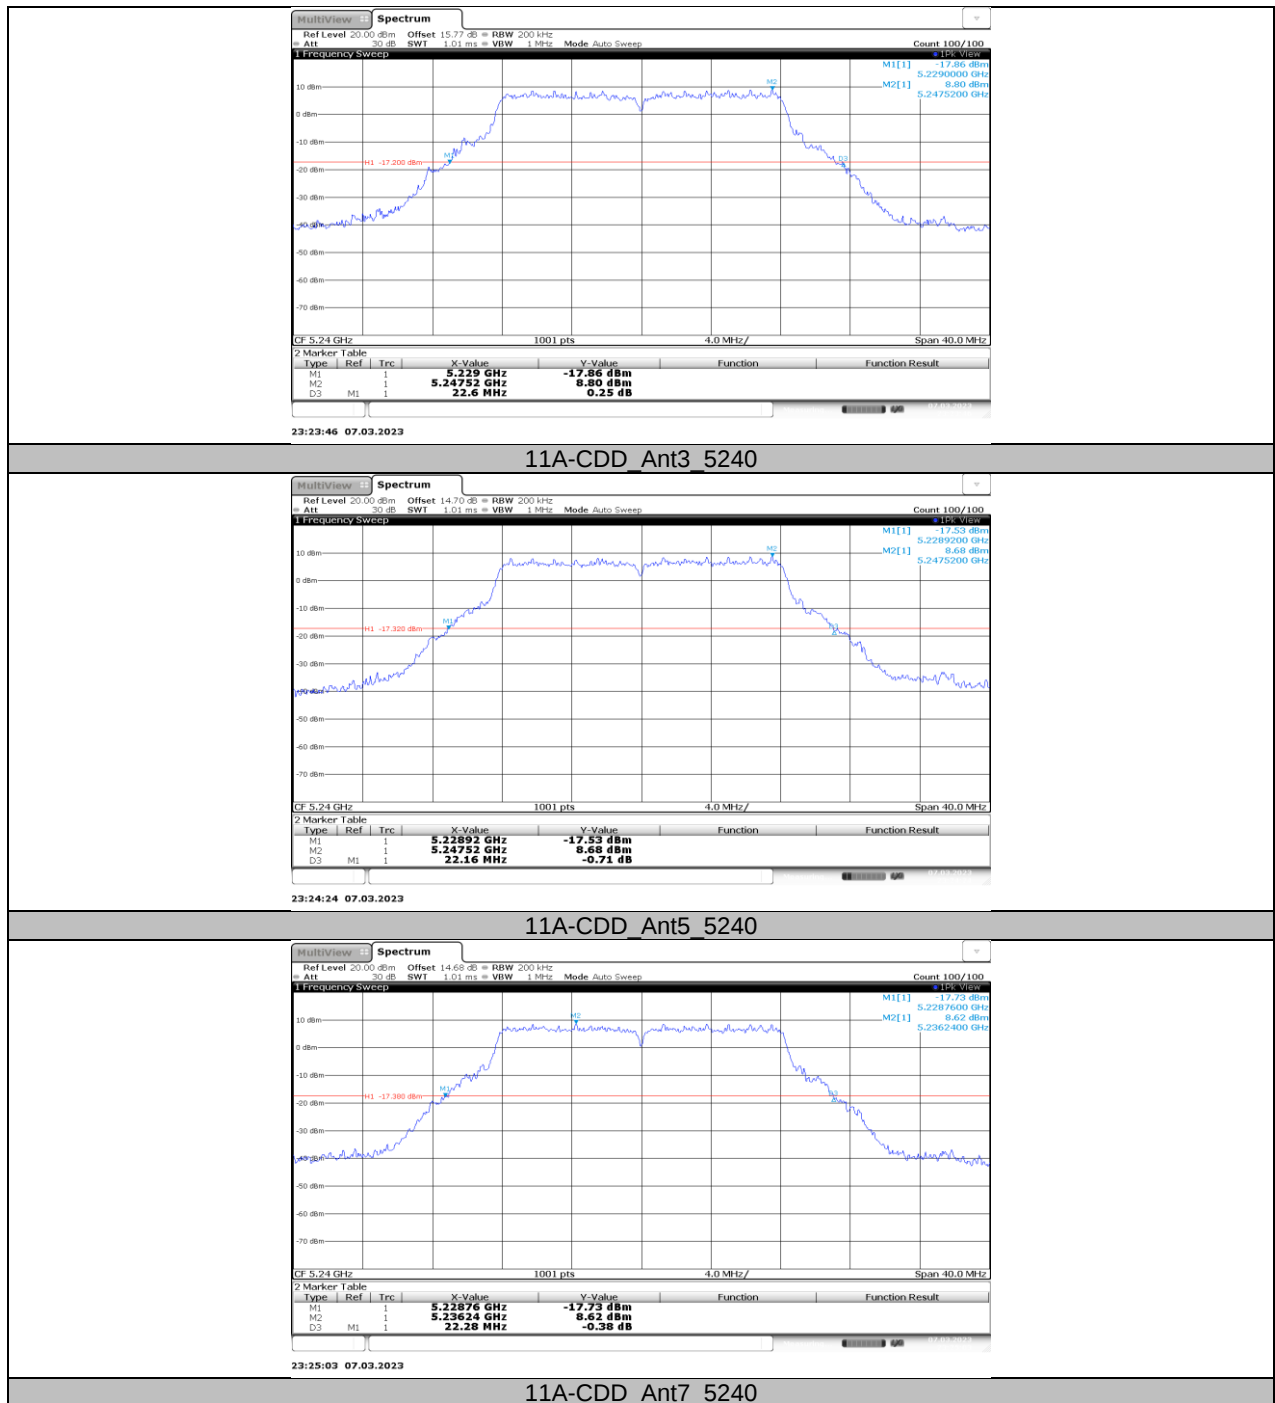


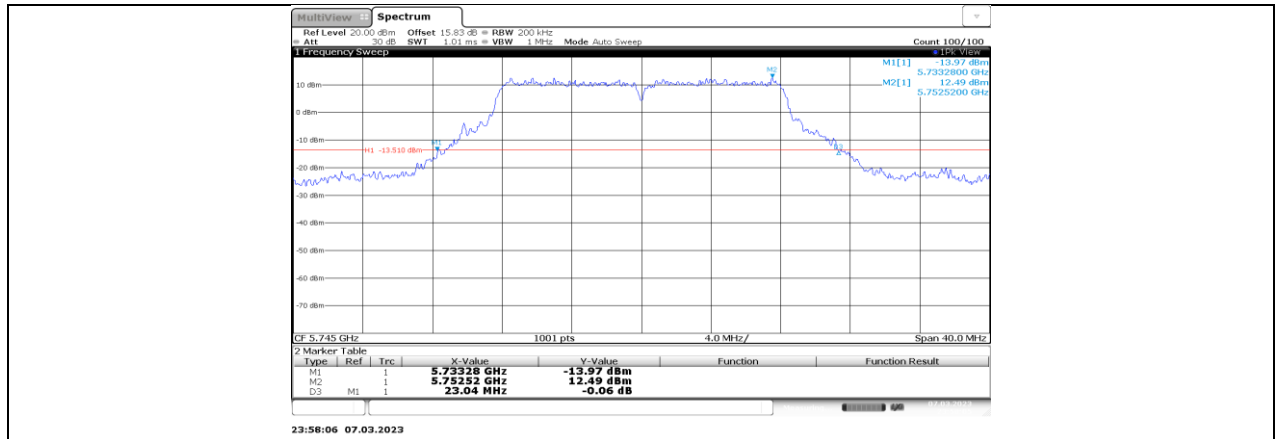


11A-CDD\_Ant1\_5745

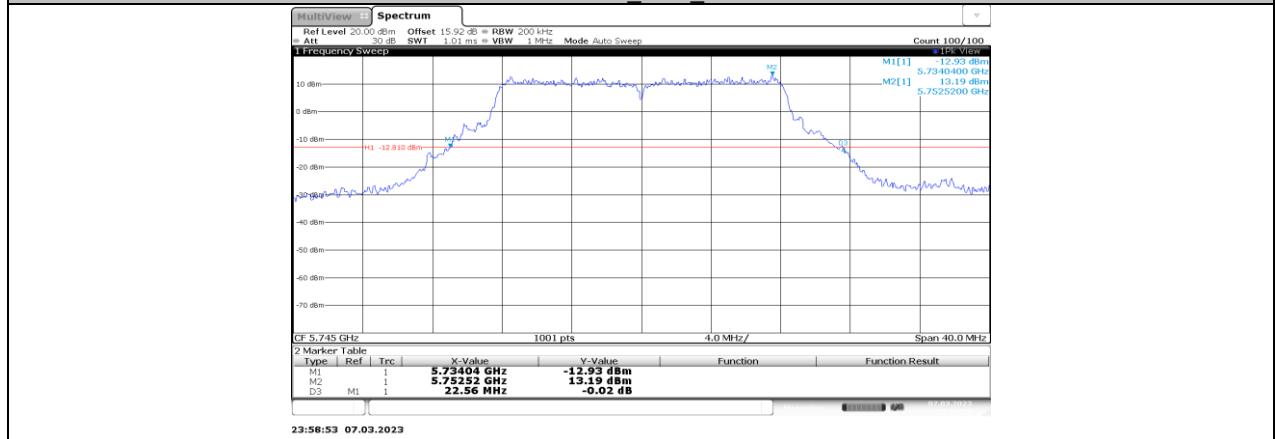


11A-CDD\_Ant3\_5745

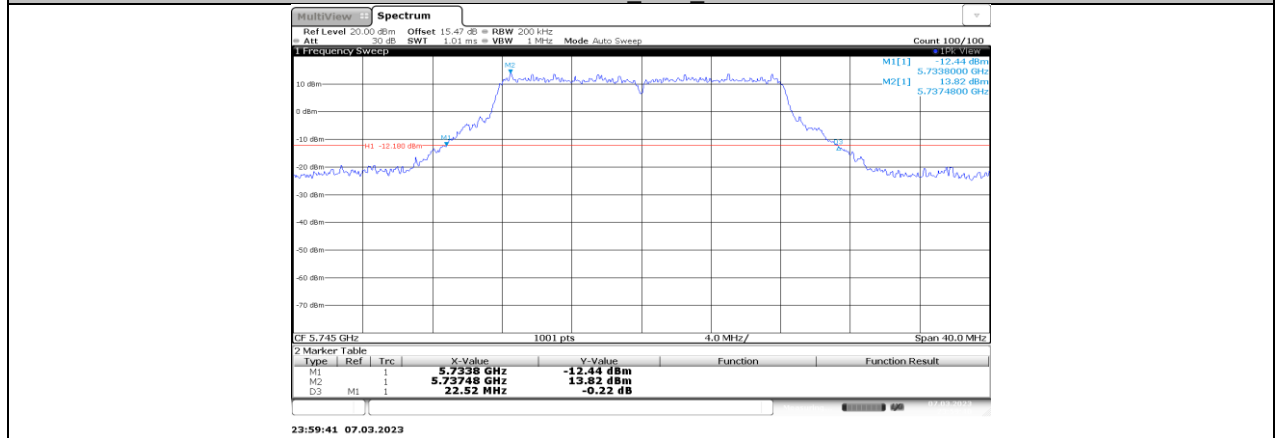


11A-CDD\_Ant5\_5745

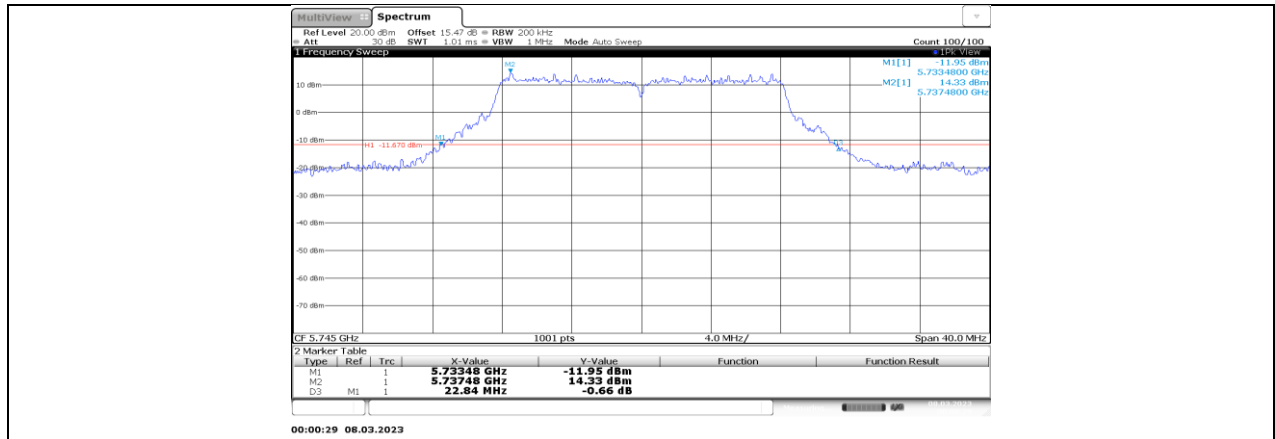


11A-CDD\_Ant7\_5745



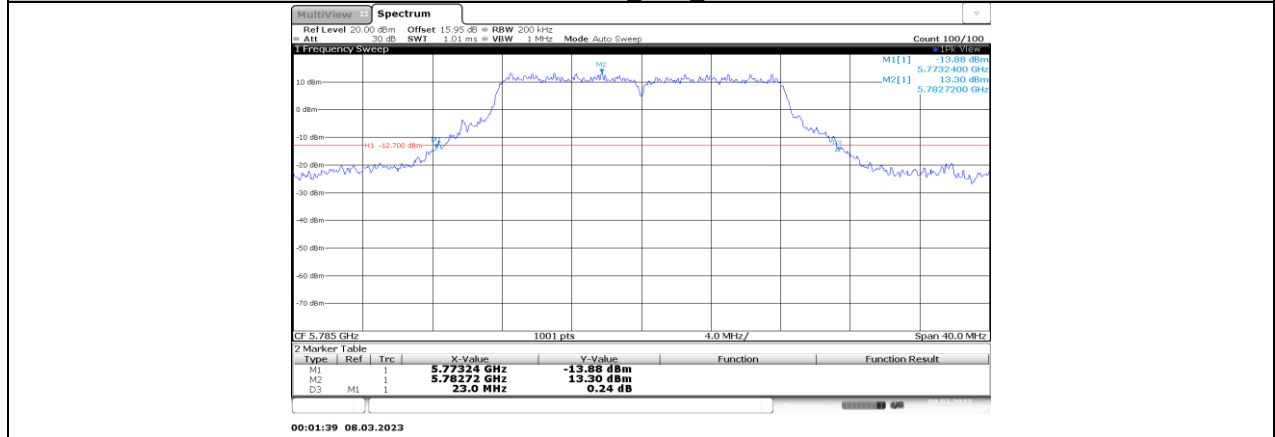



11A-CDD\_Ant1\_5785

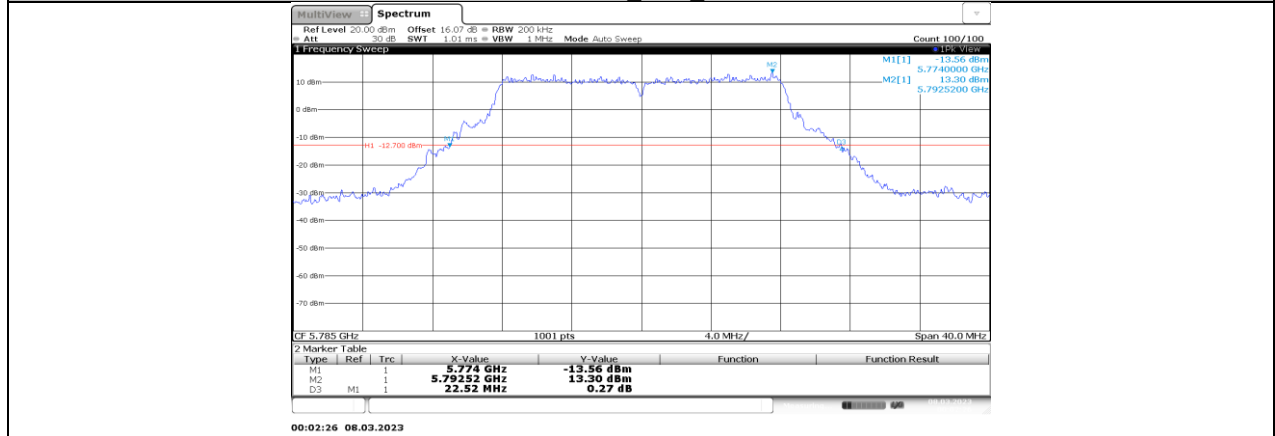



11A-CDD\_Ant3\_5785

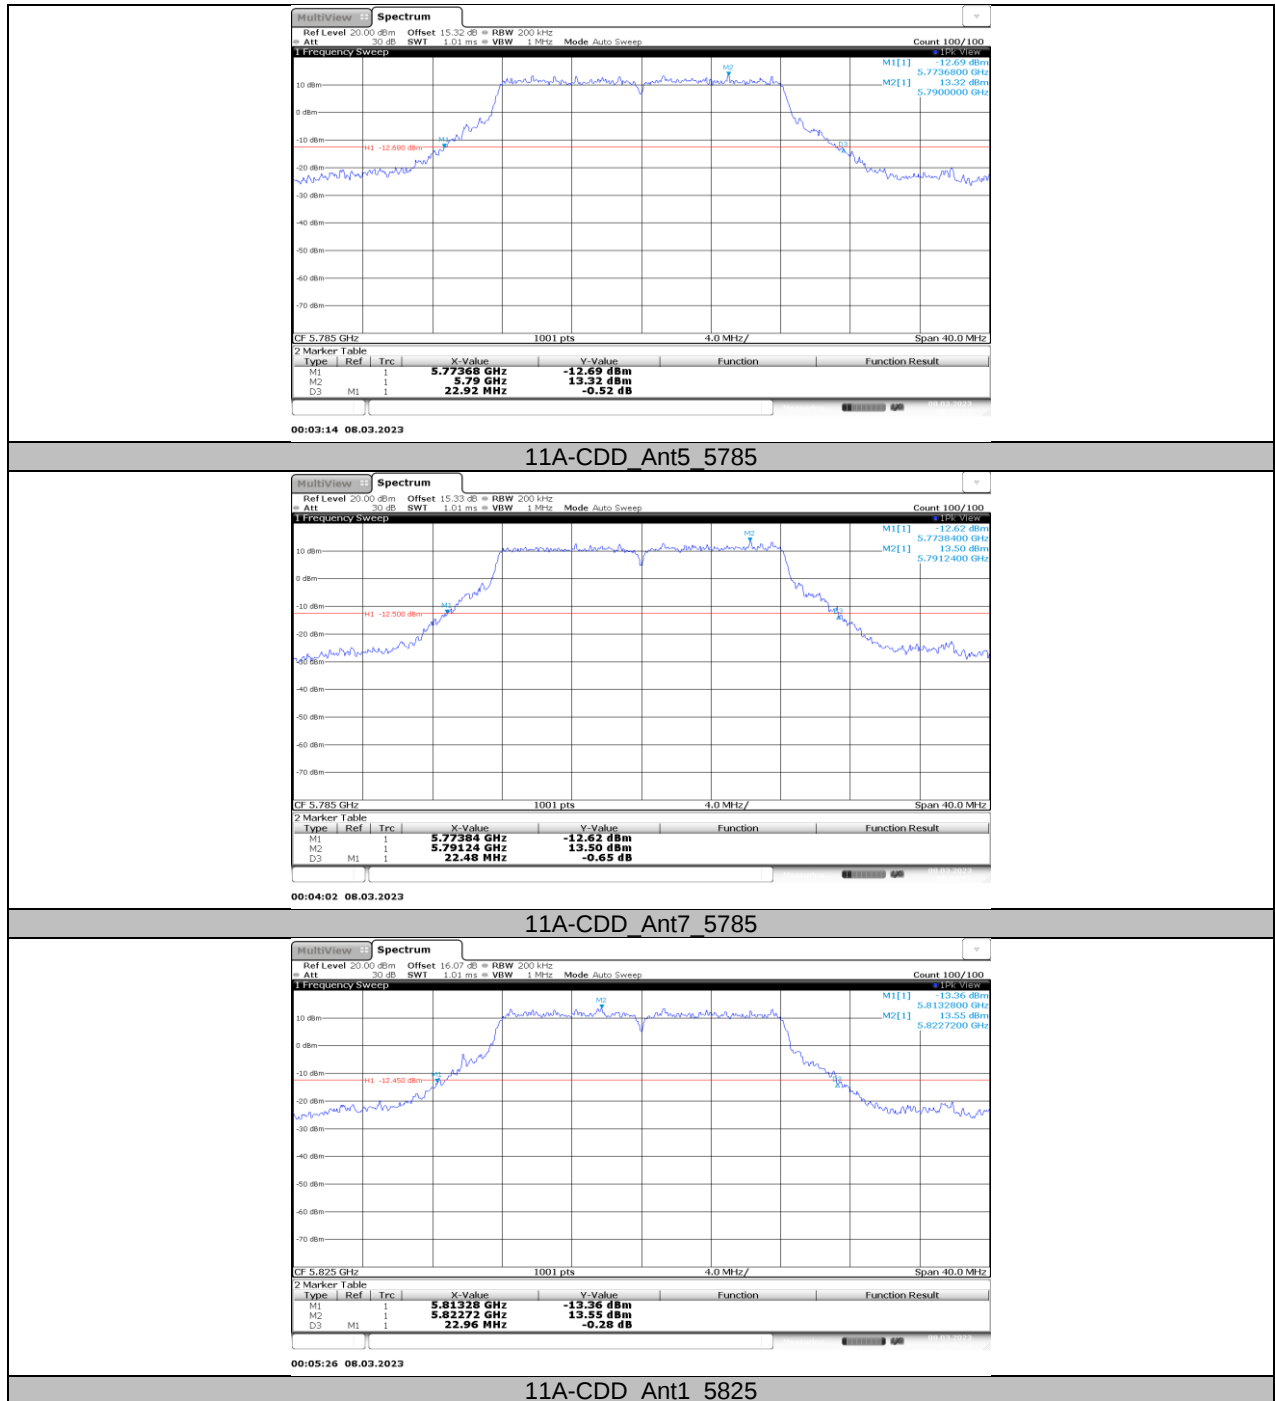


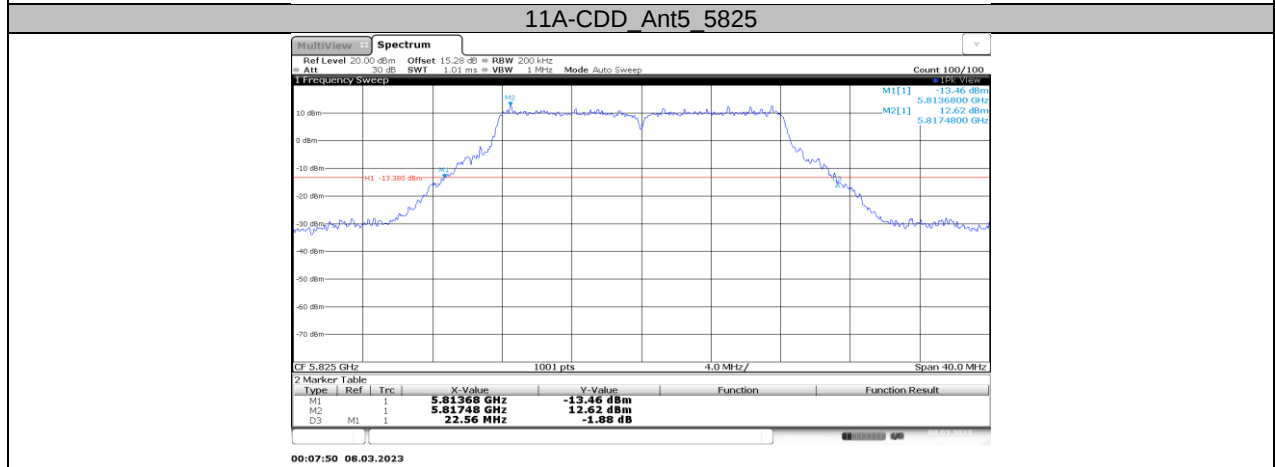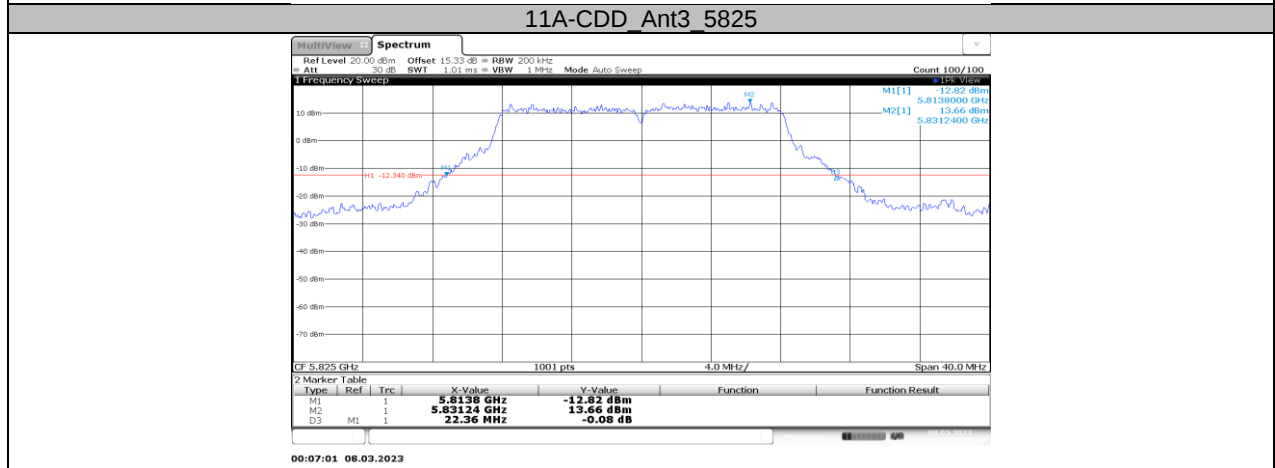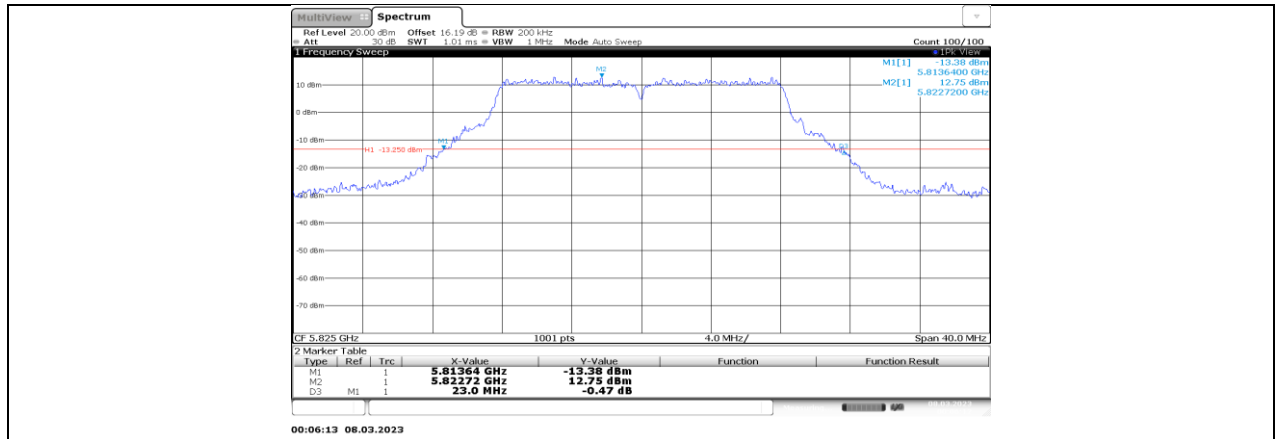


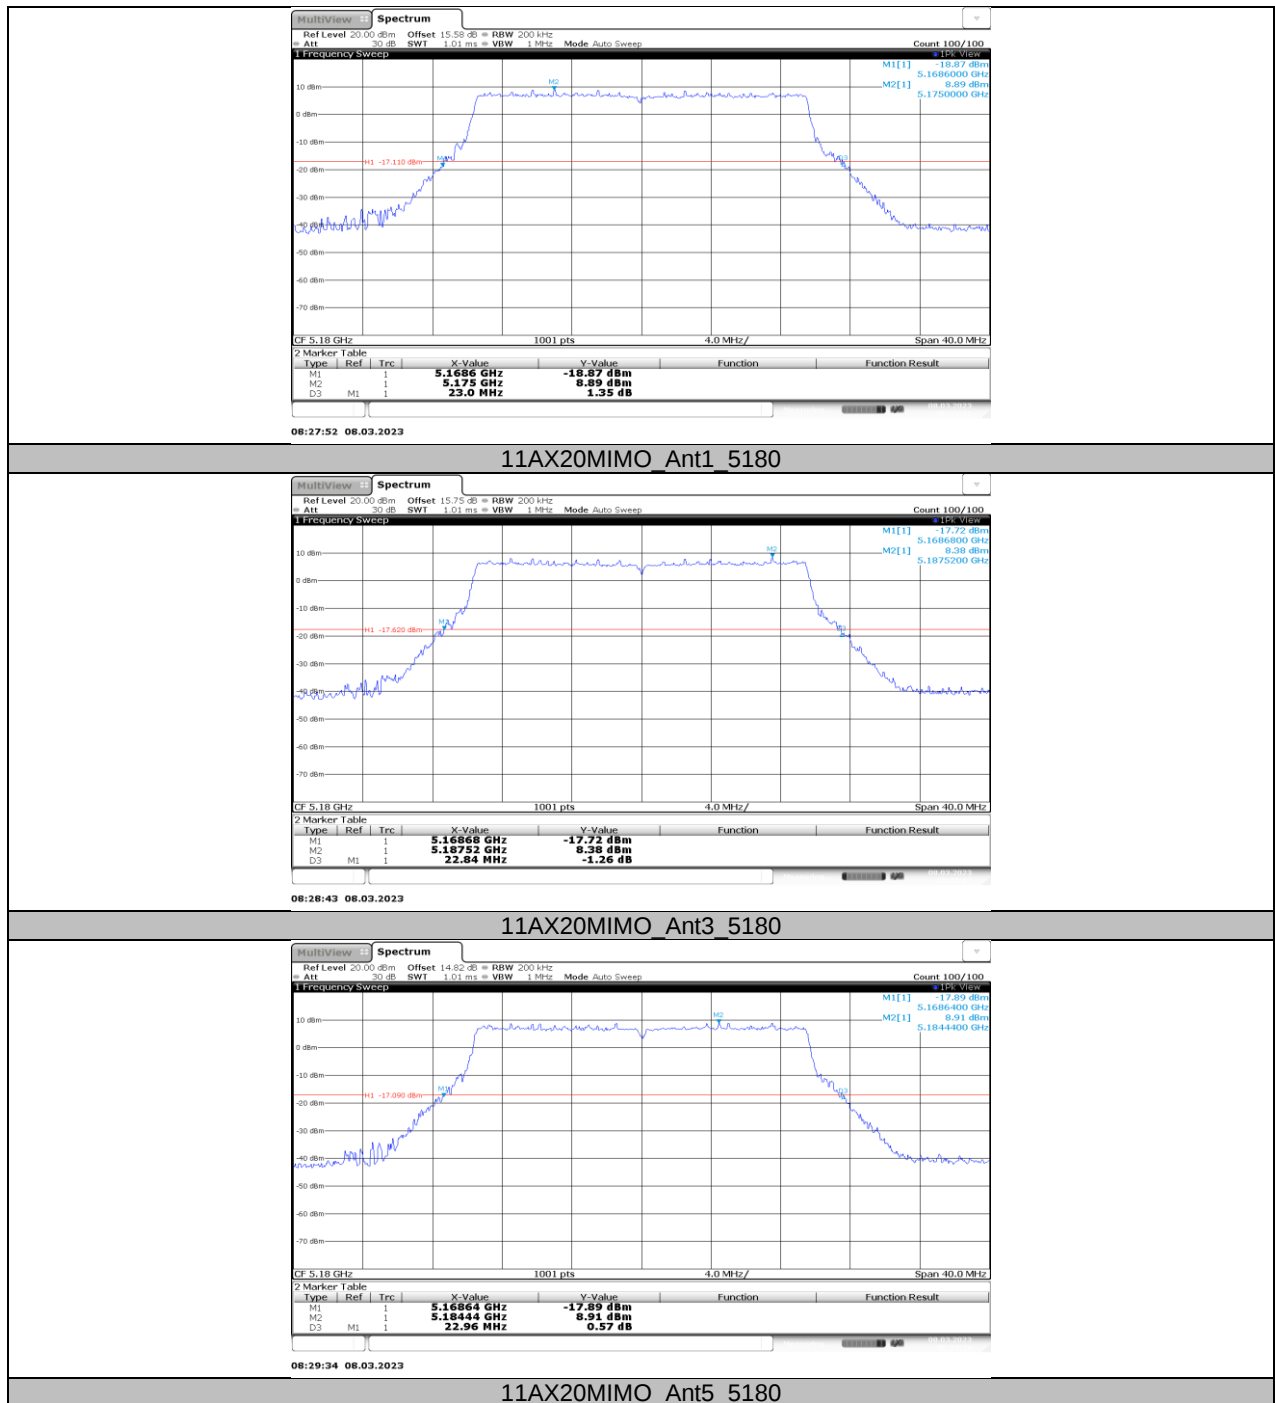


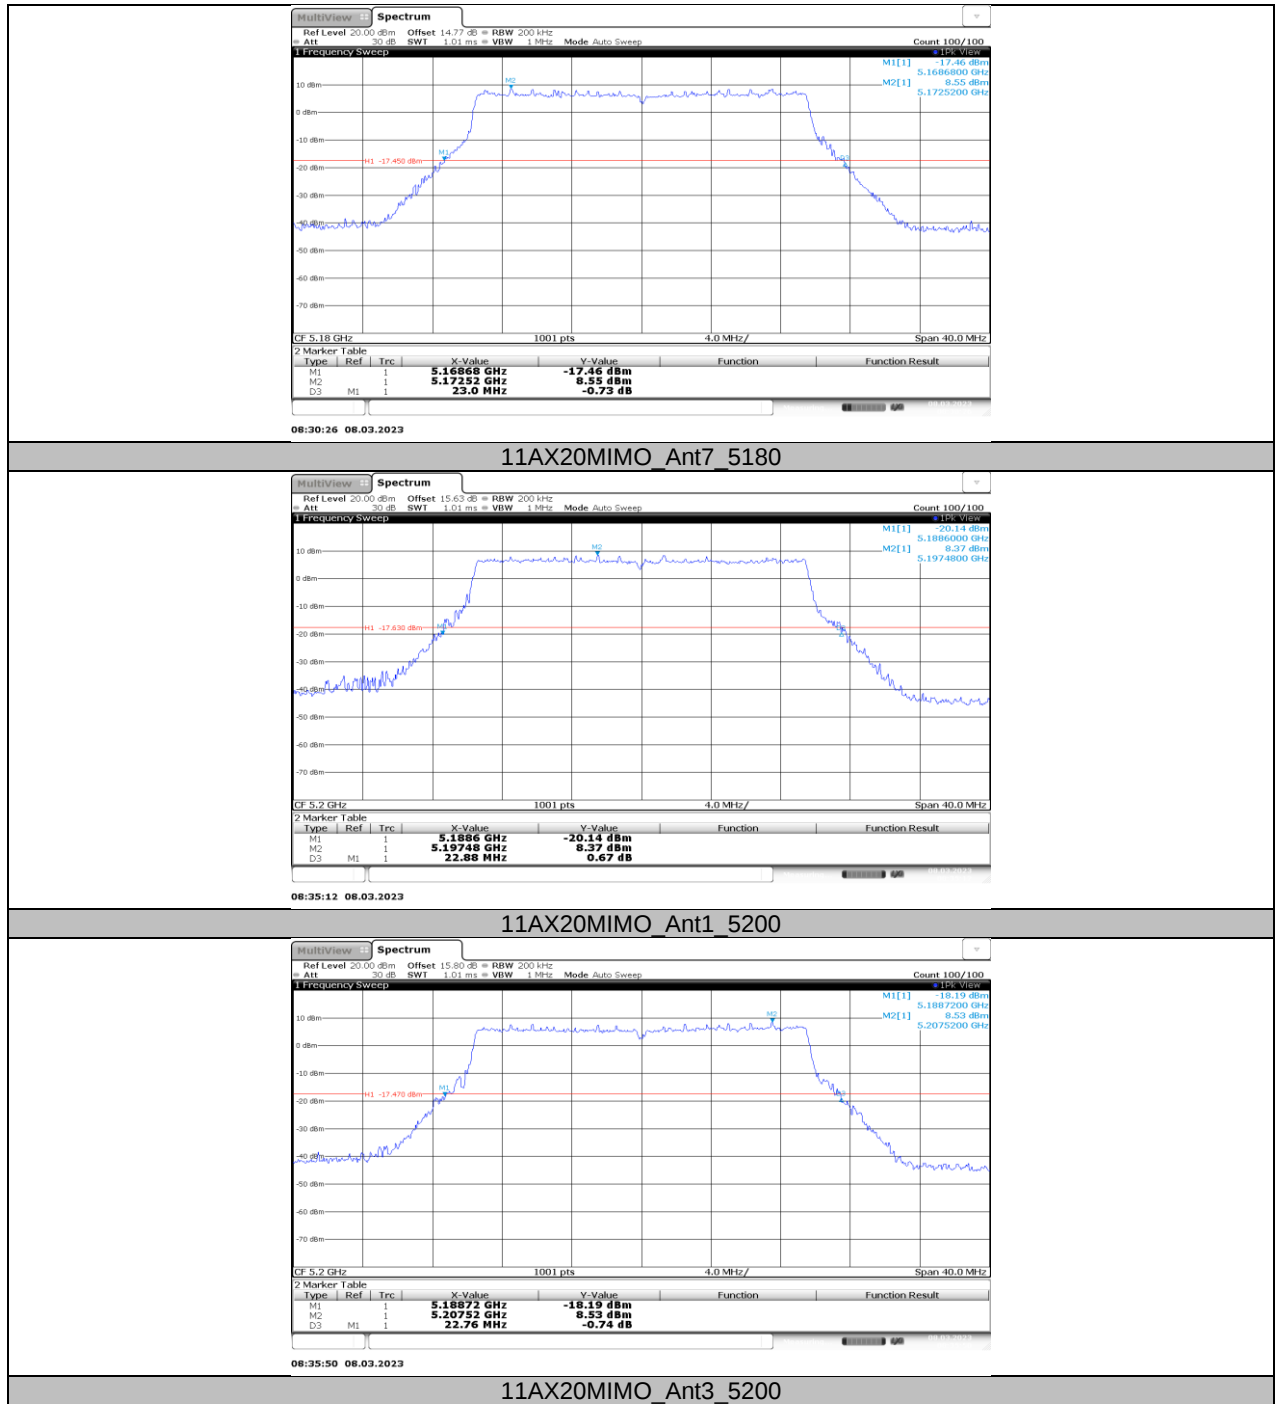


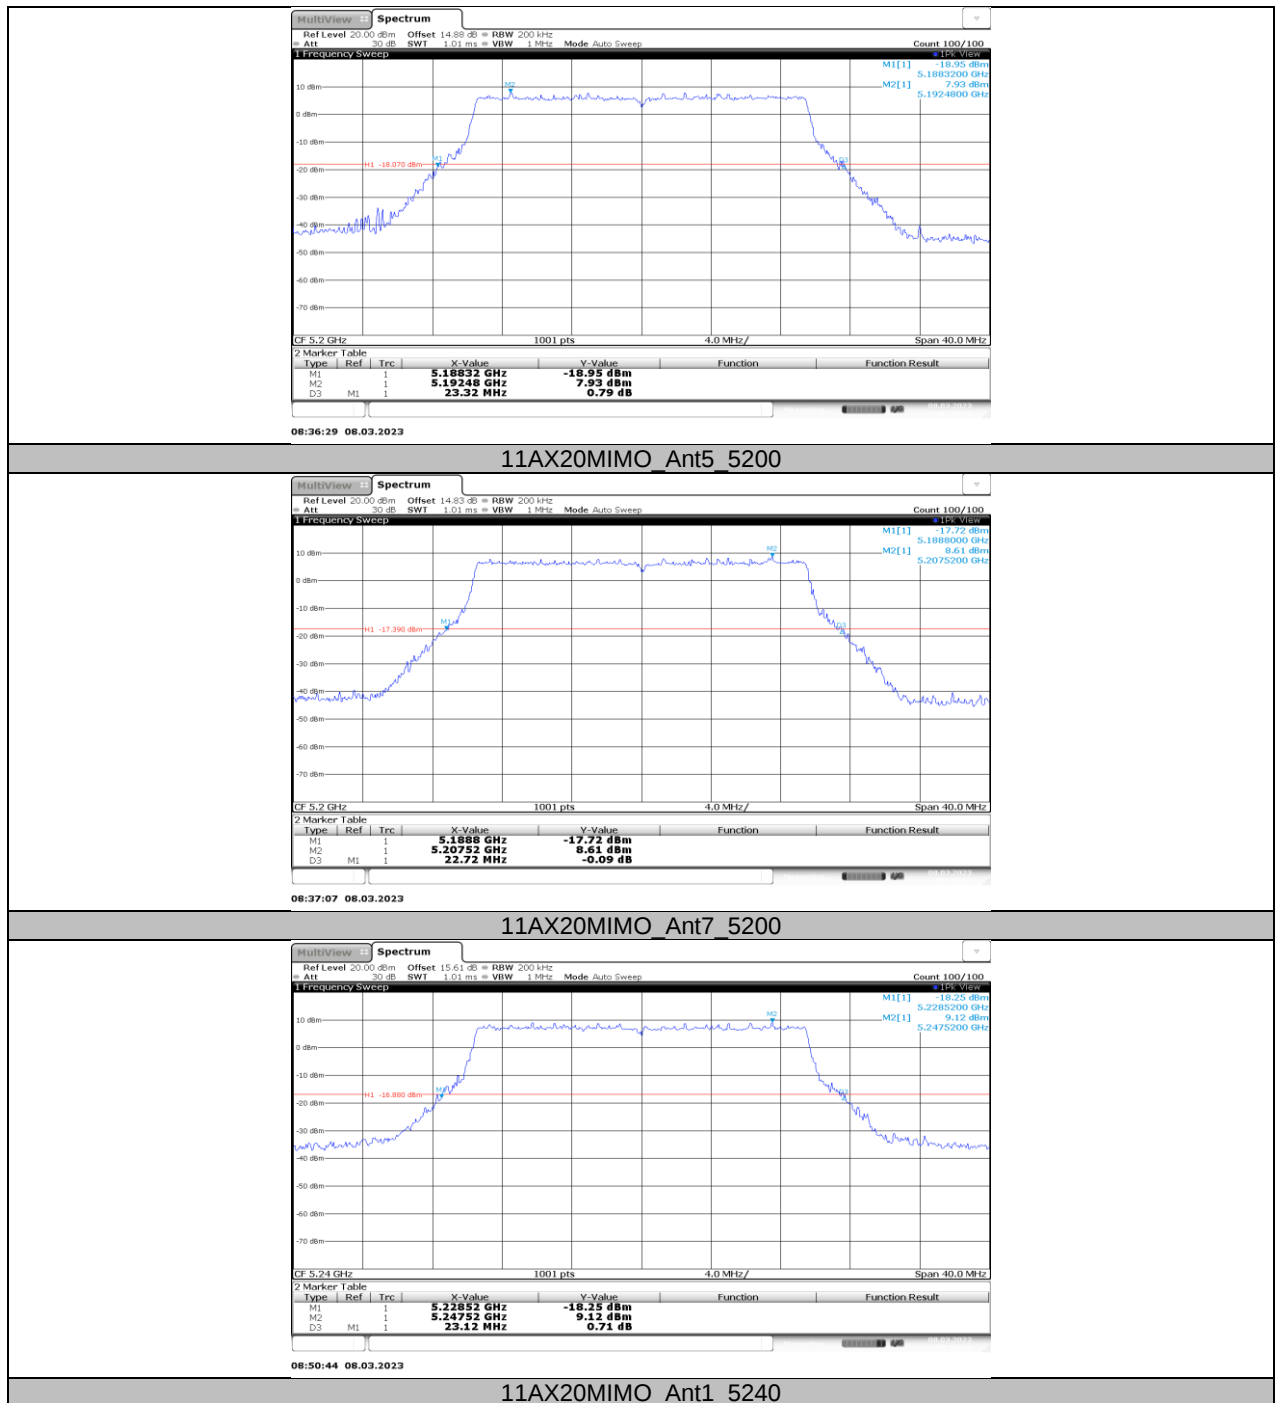


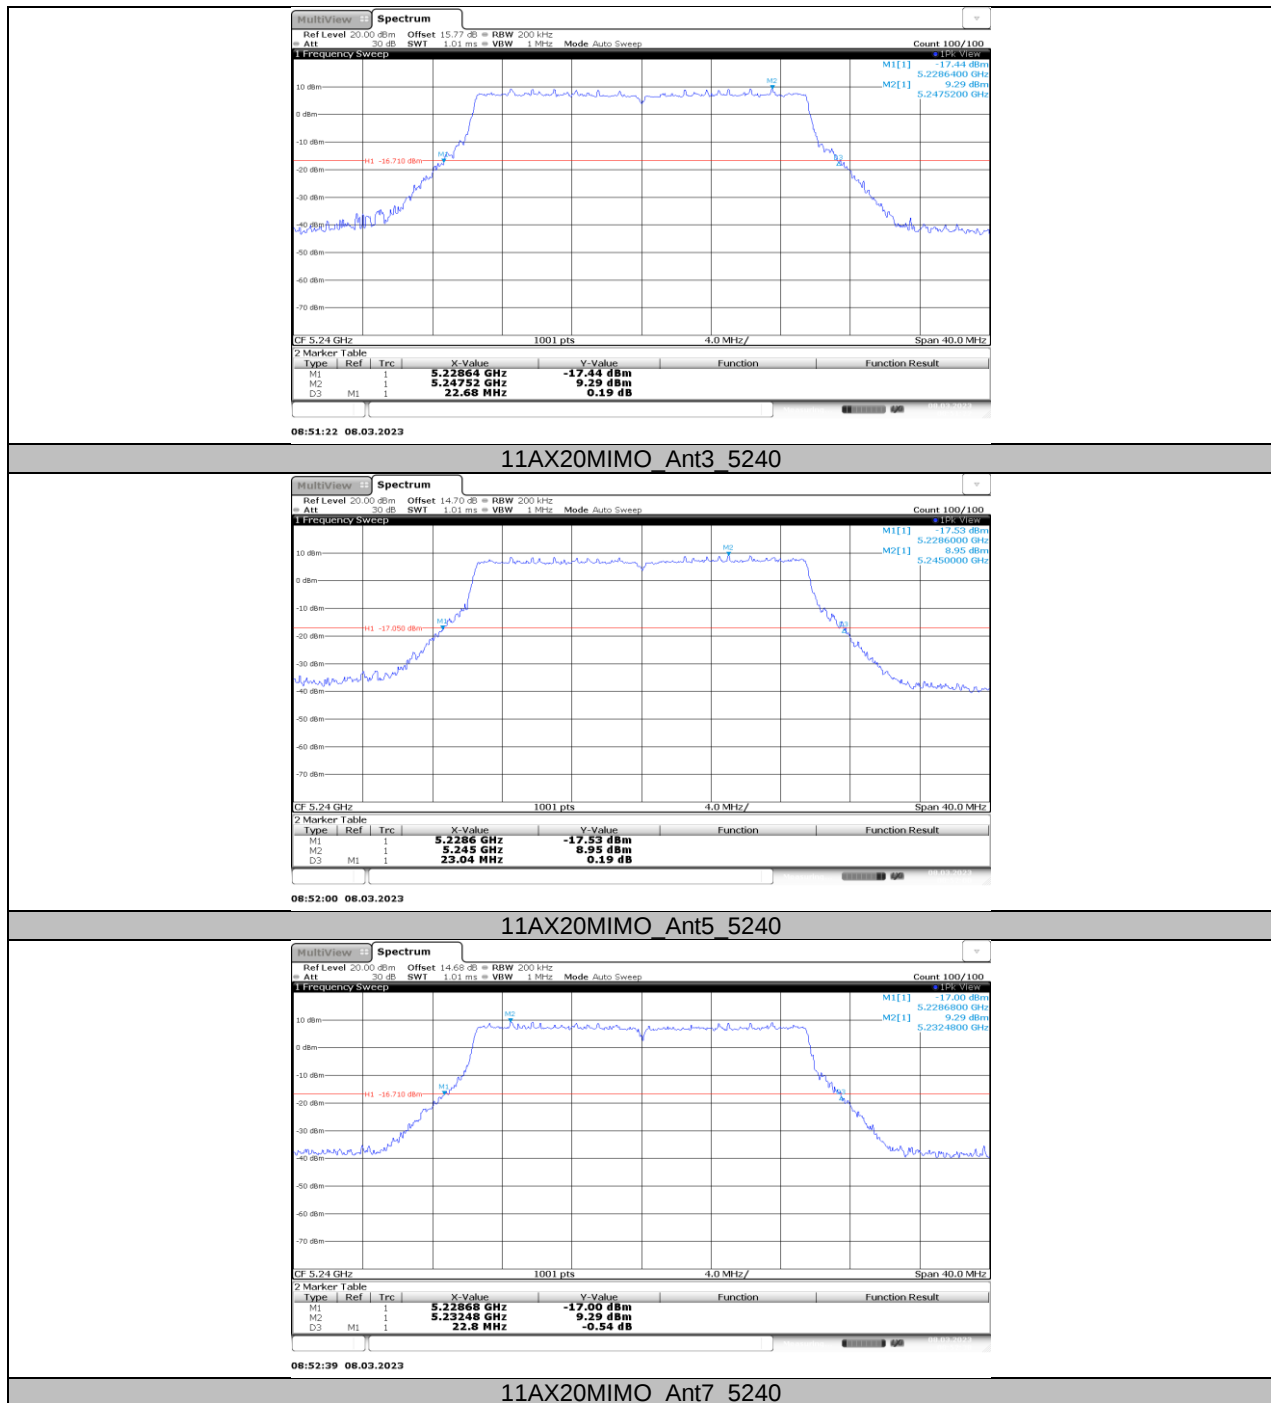


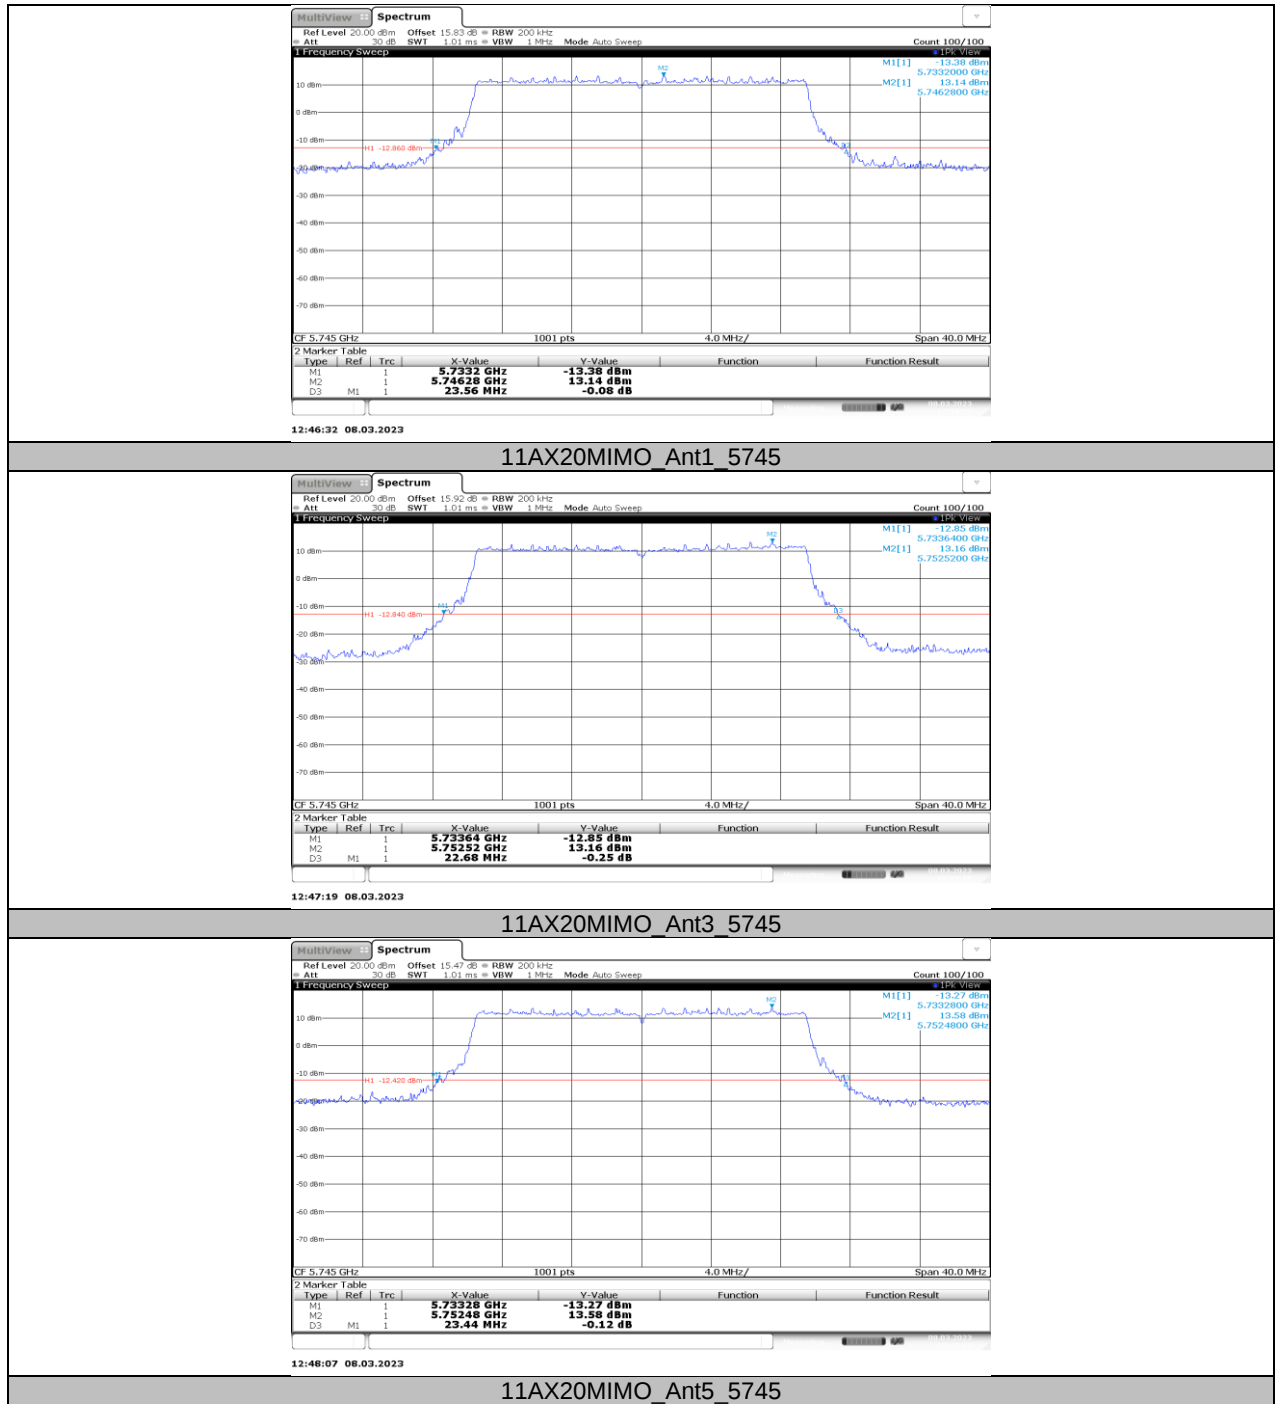



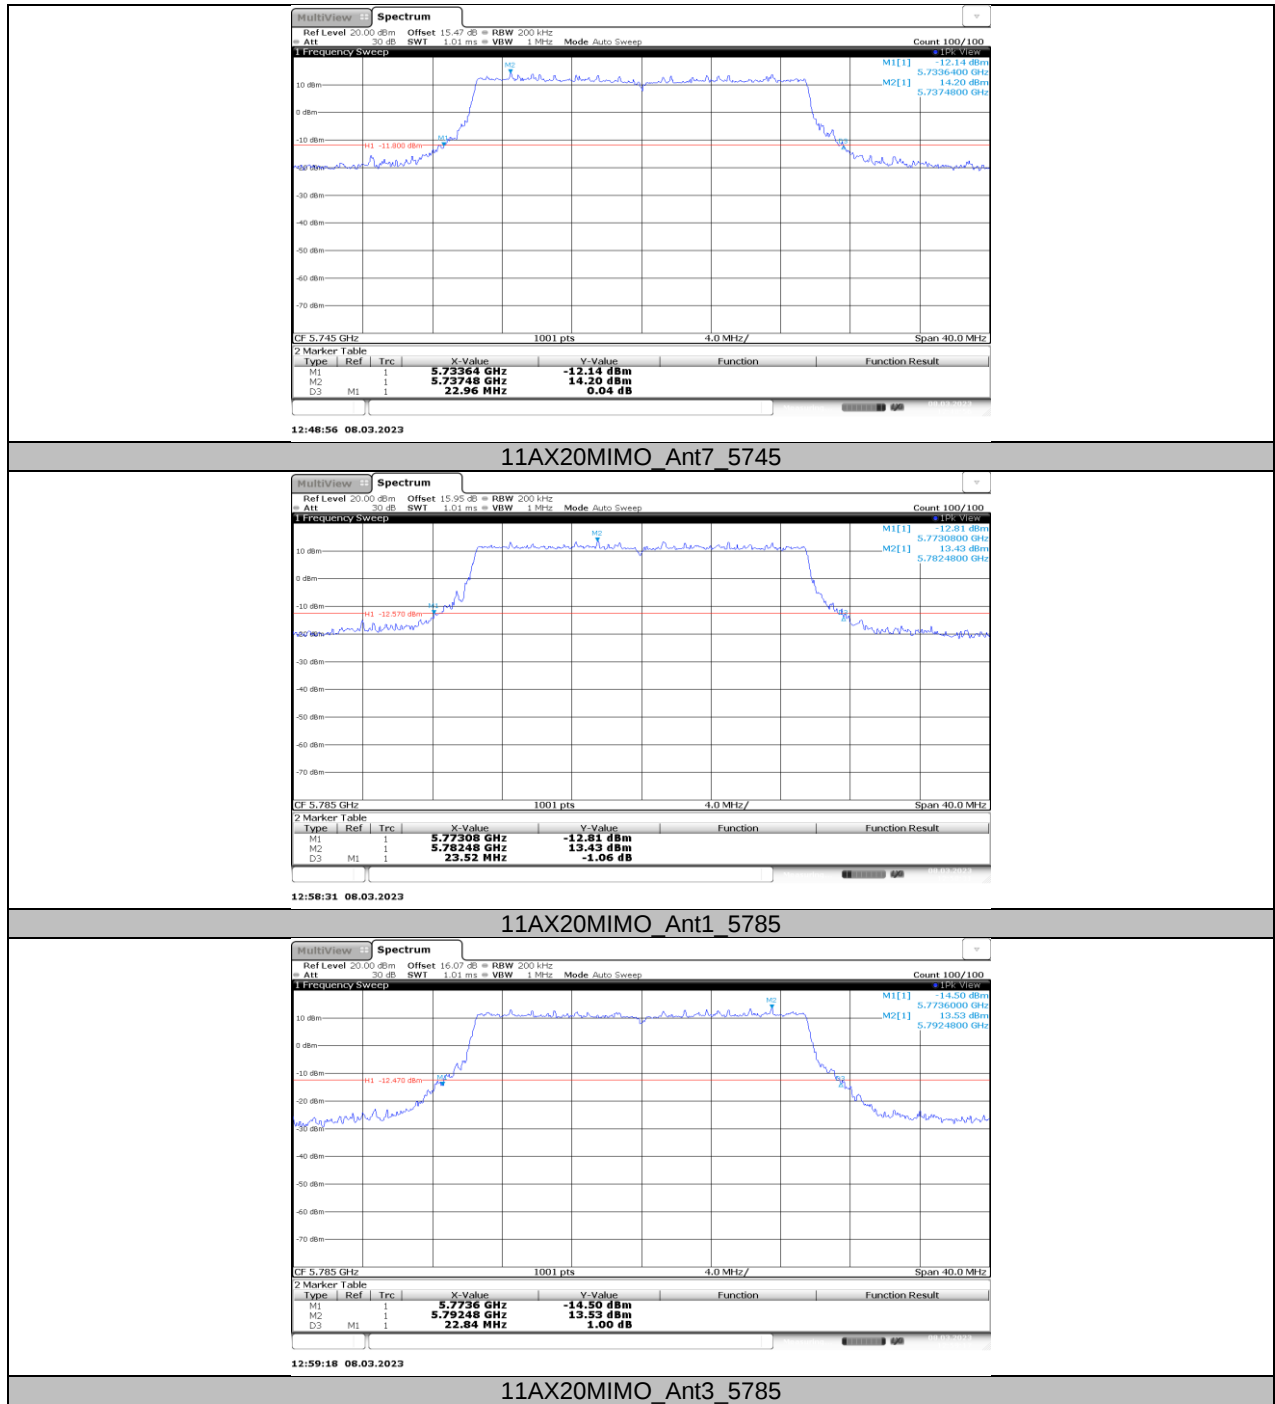


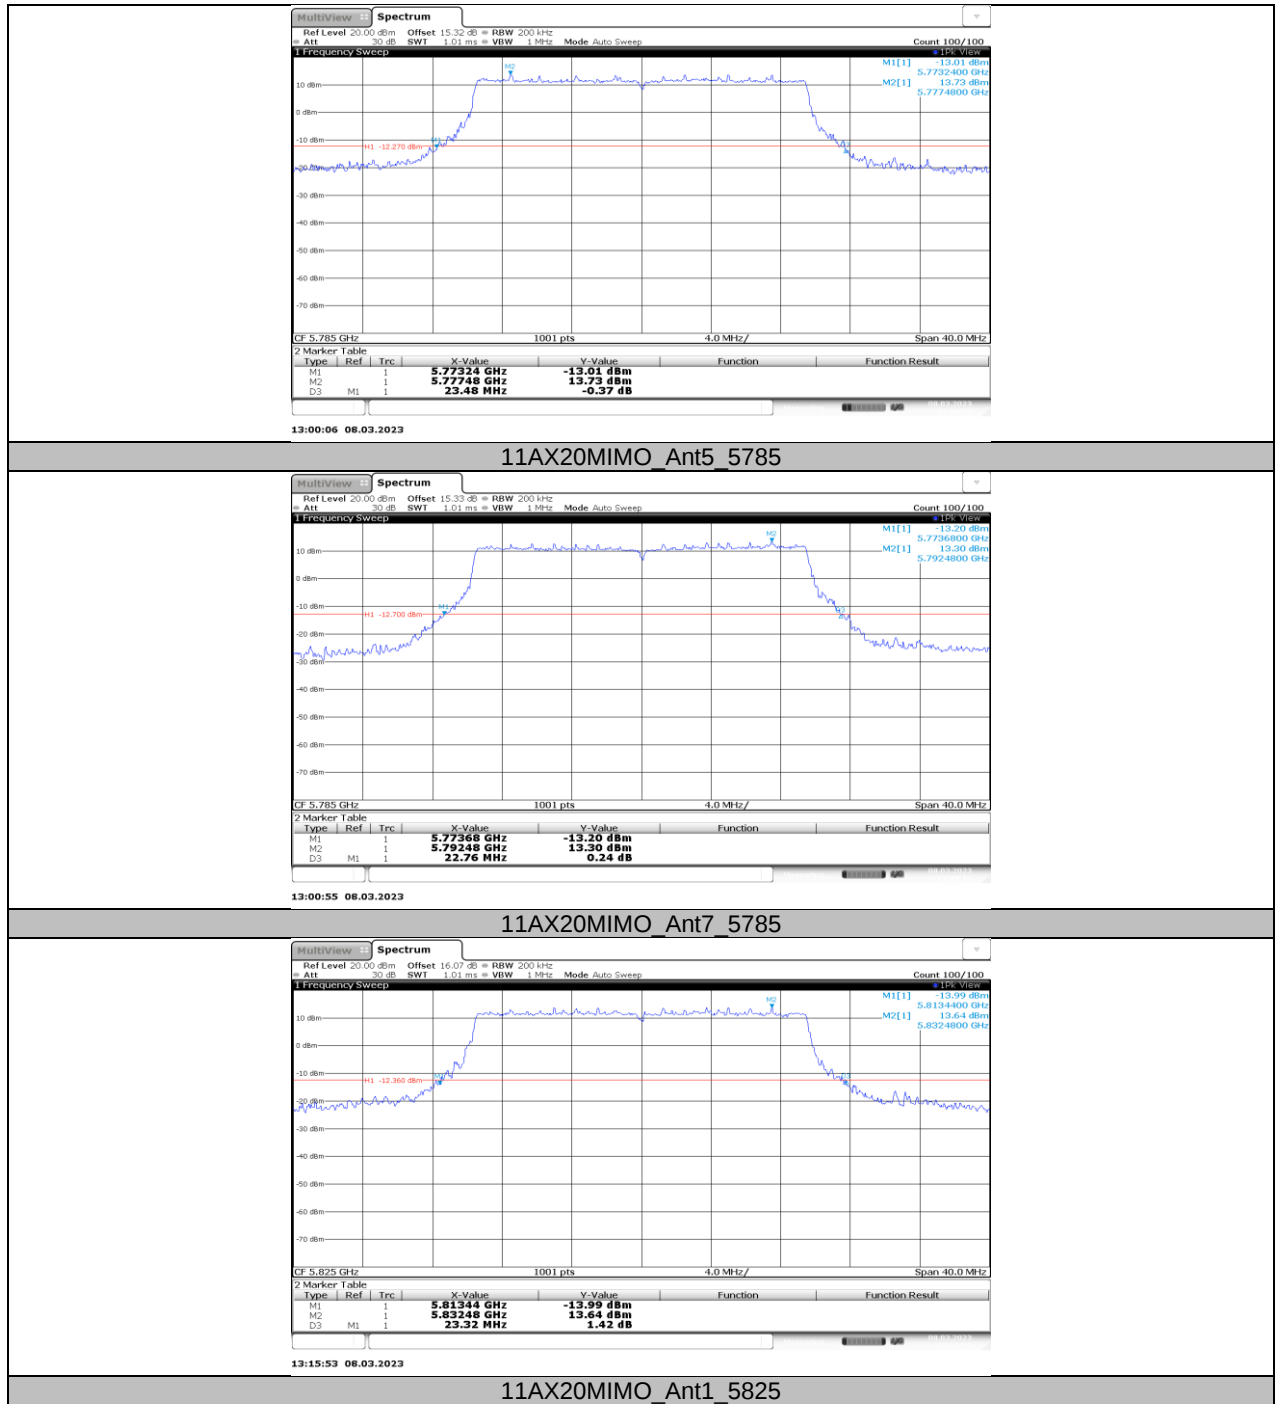


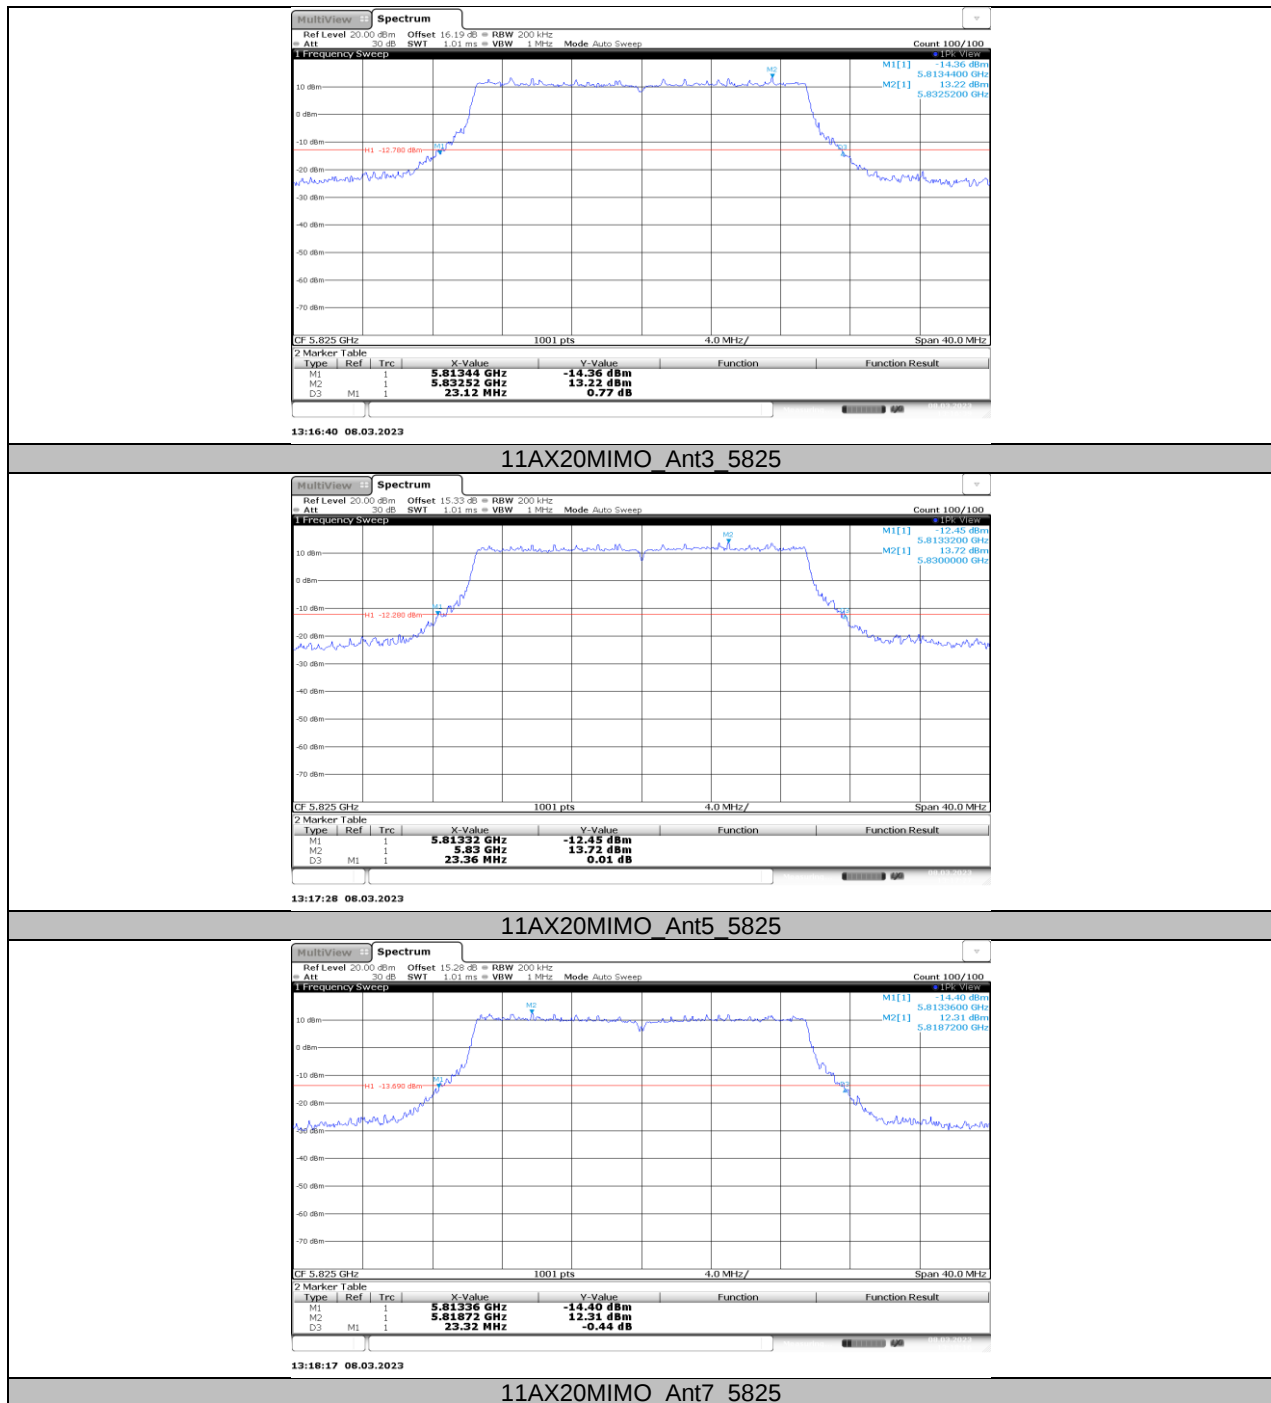

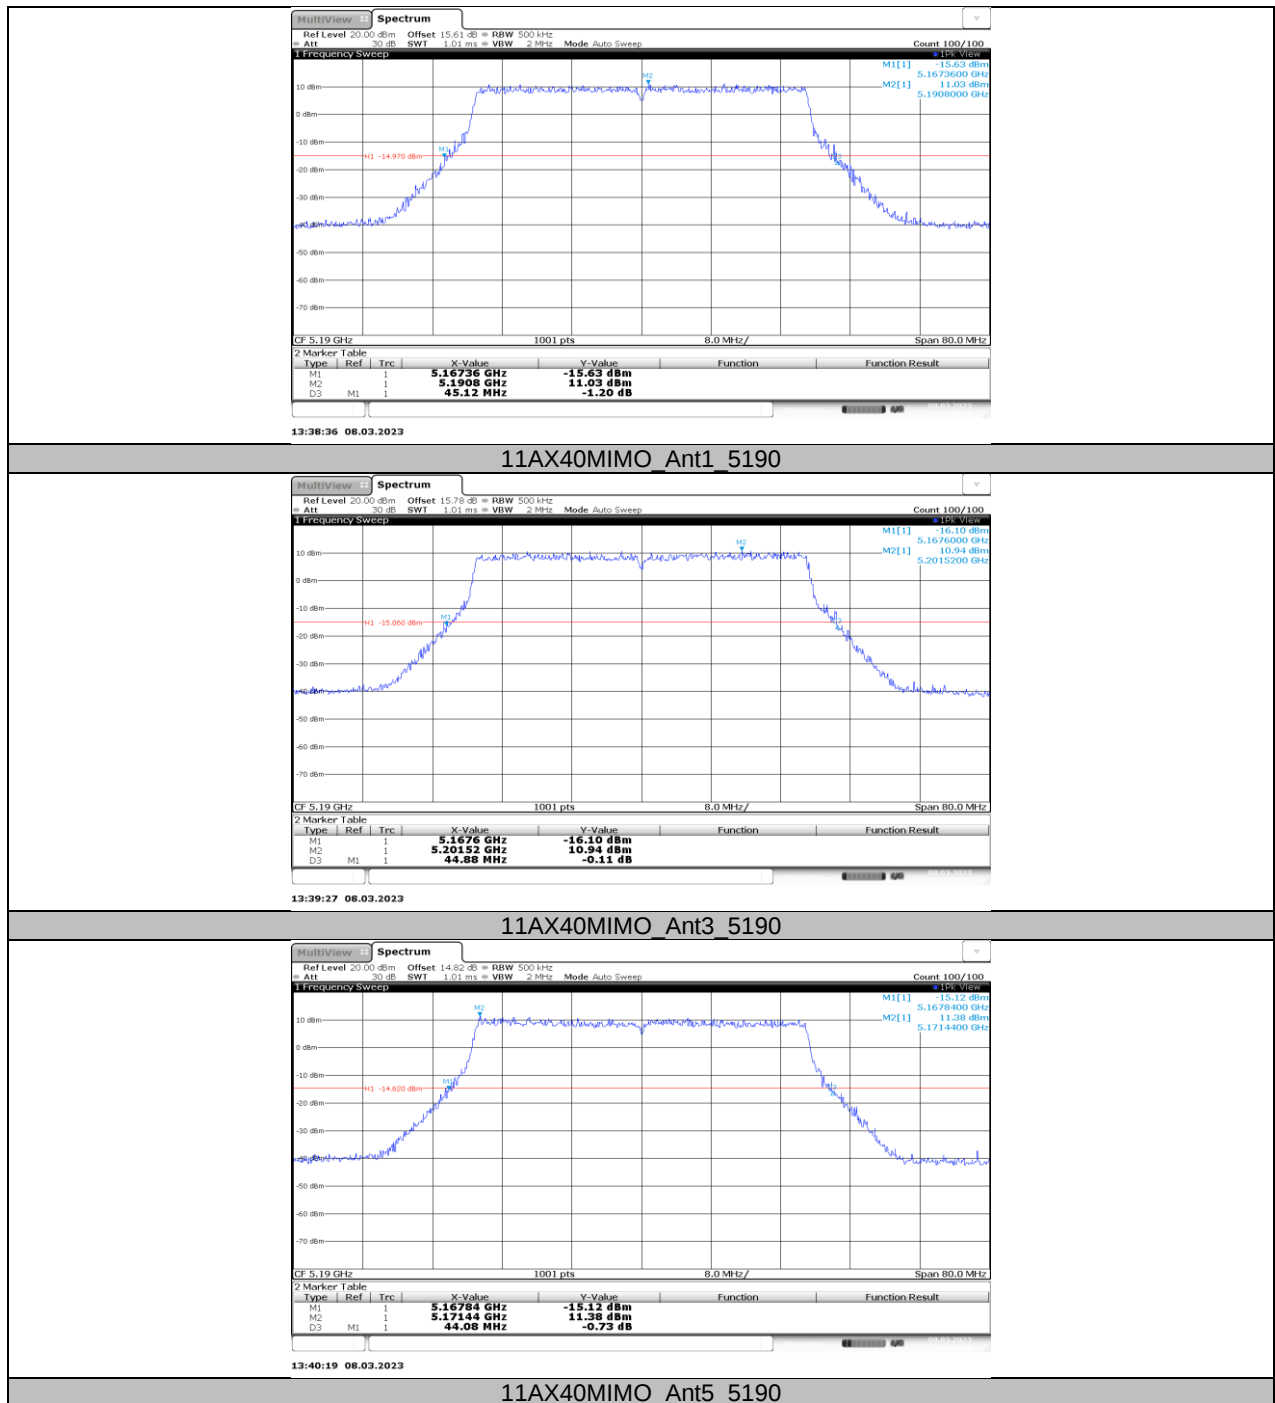


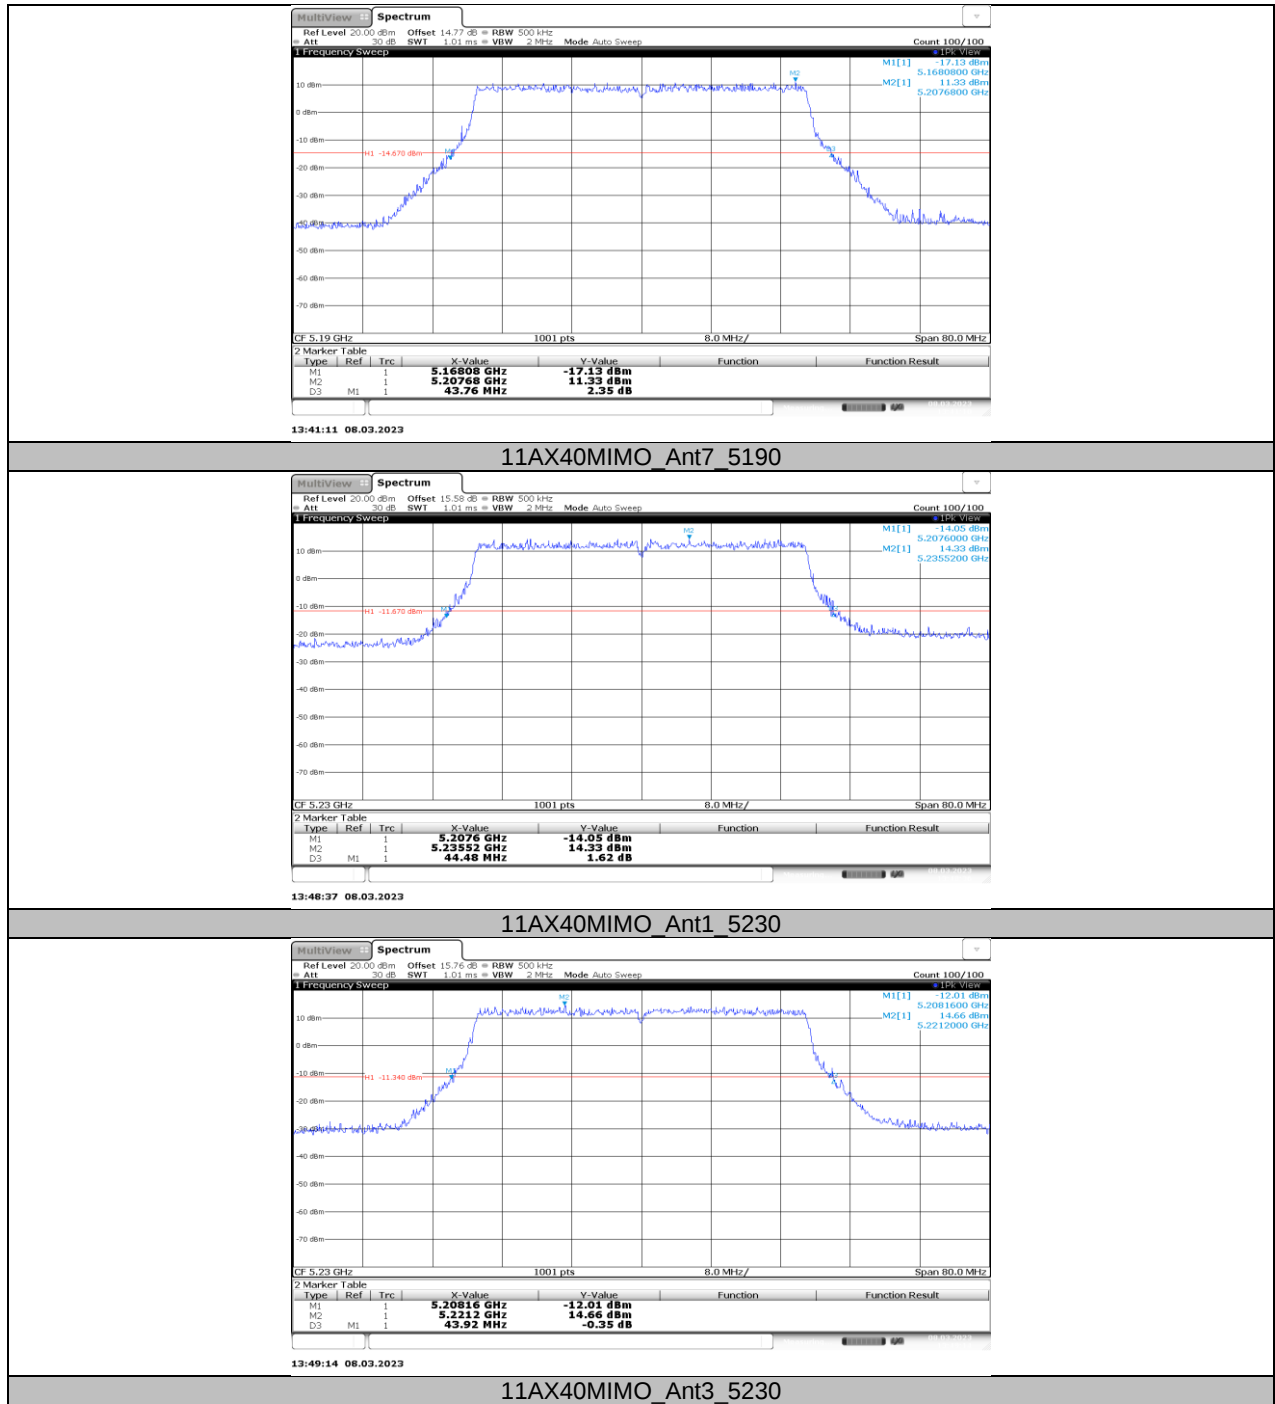

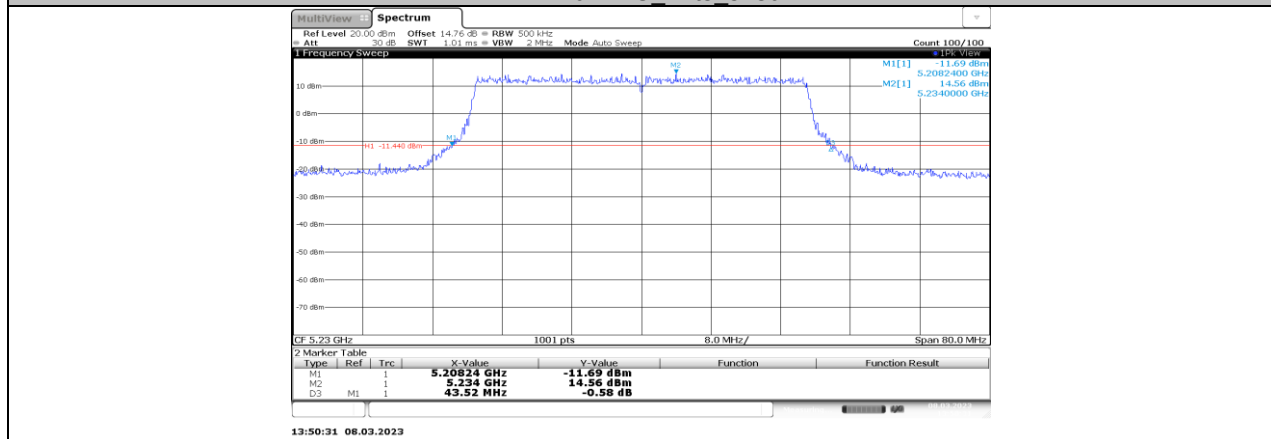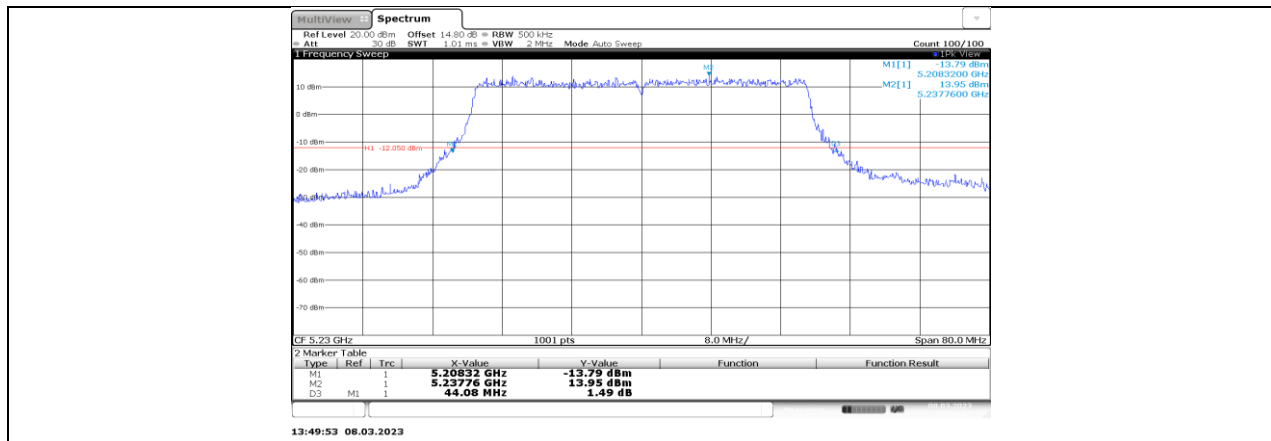


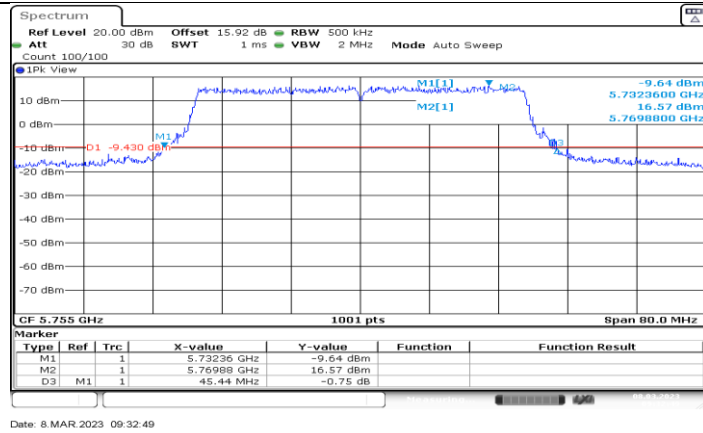


11AX40MIMO\_Ant1\_5755

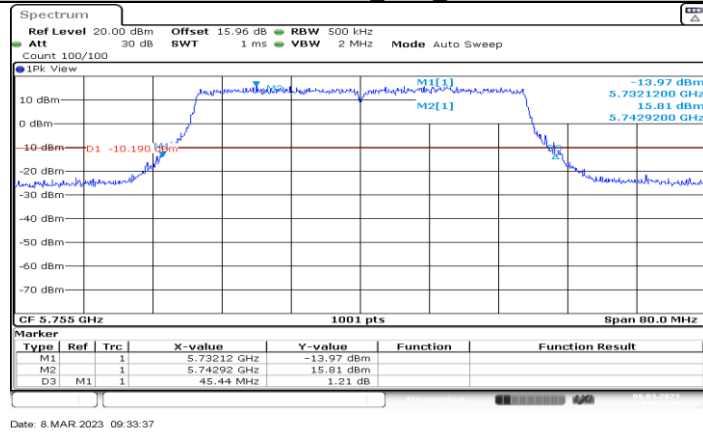

11AX40MIMO\_Ant3\_5755

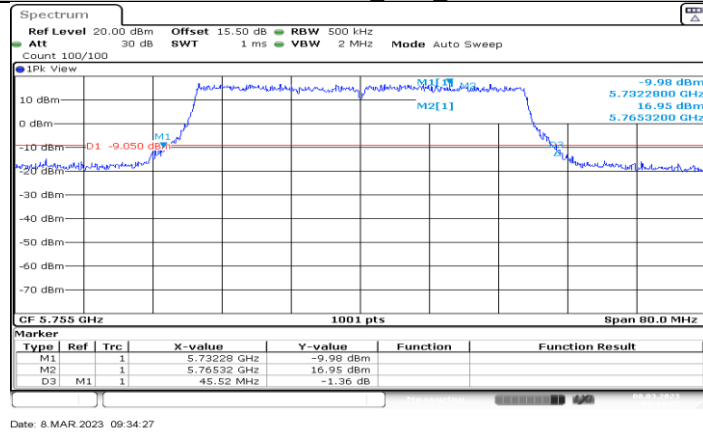


11AX40MIMO\_Ant5\_5755

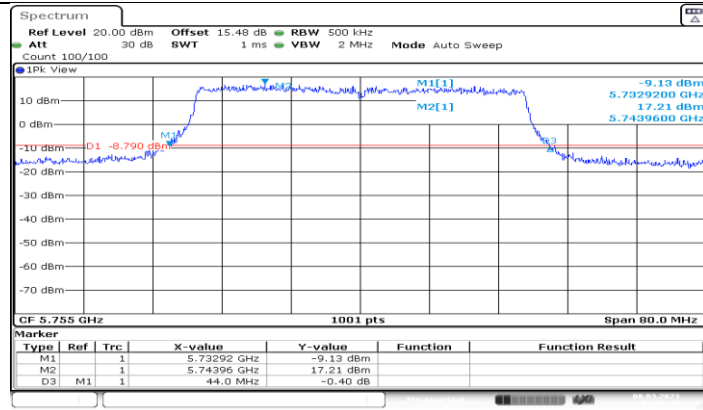


Date: 8.MAR.2023 09:35:17

### 11AX40MIMO\_Ant7\_5755

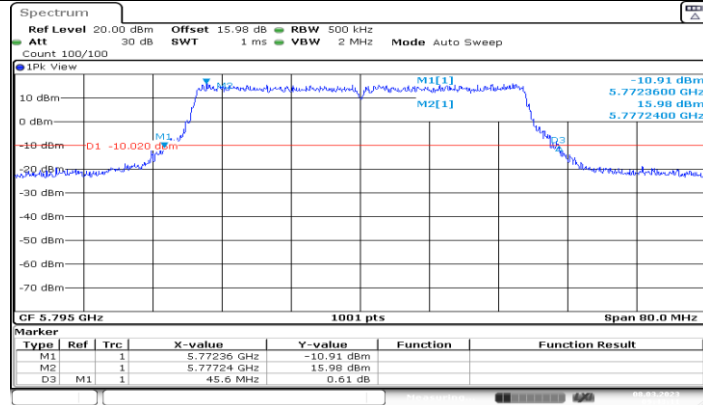


Date: 8.MAR.2023 09:43:12


### 11AX40MIMO\_Ant1\_5795

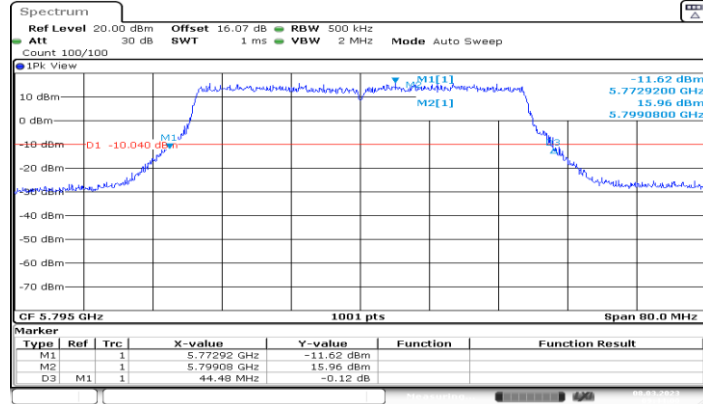

Date: 8.MAR.2023 09:44:01


### 11AX40MIMO\_Ant3\_5795

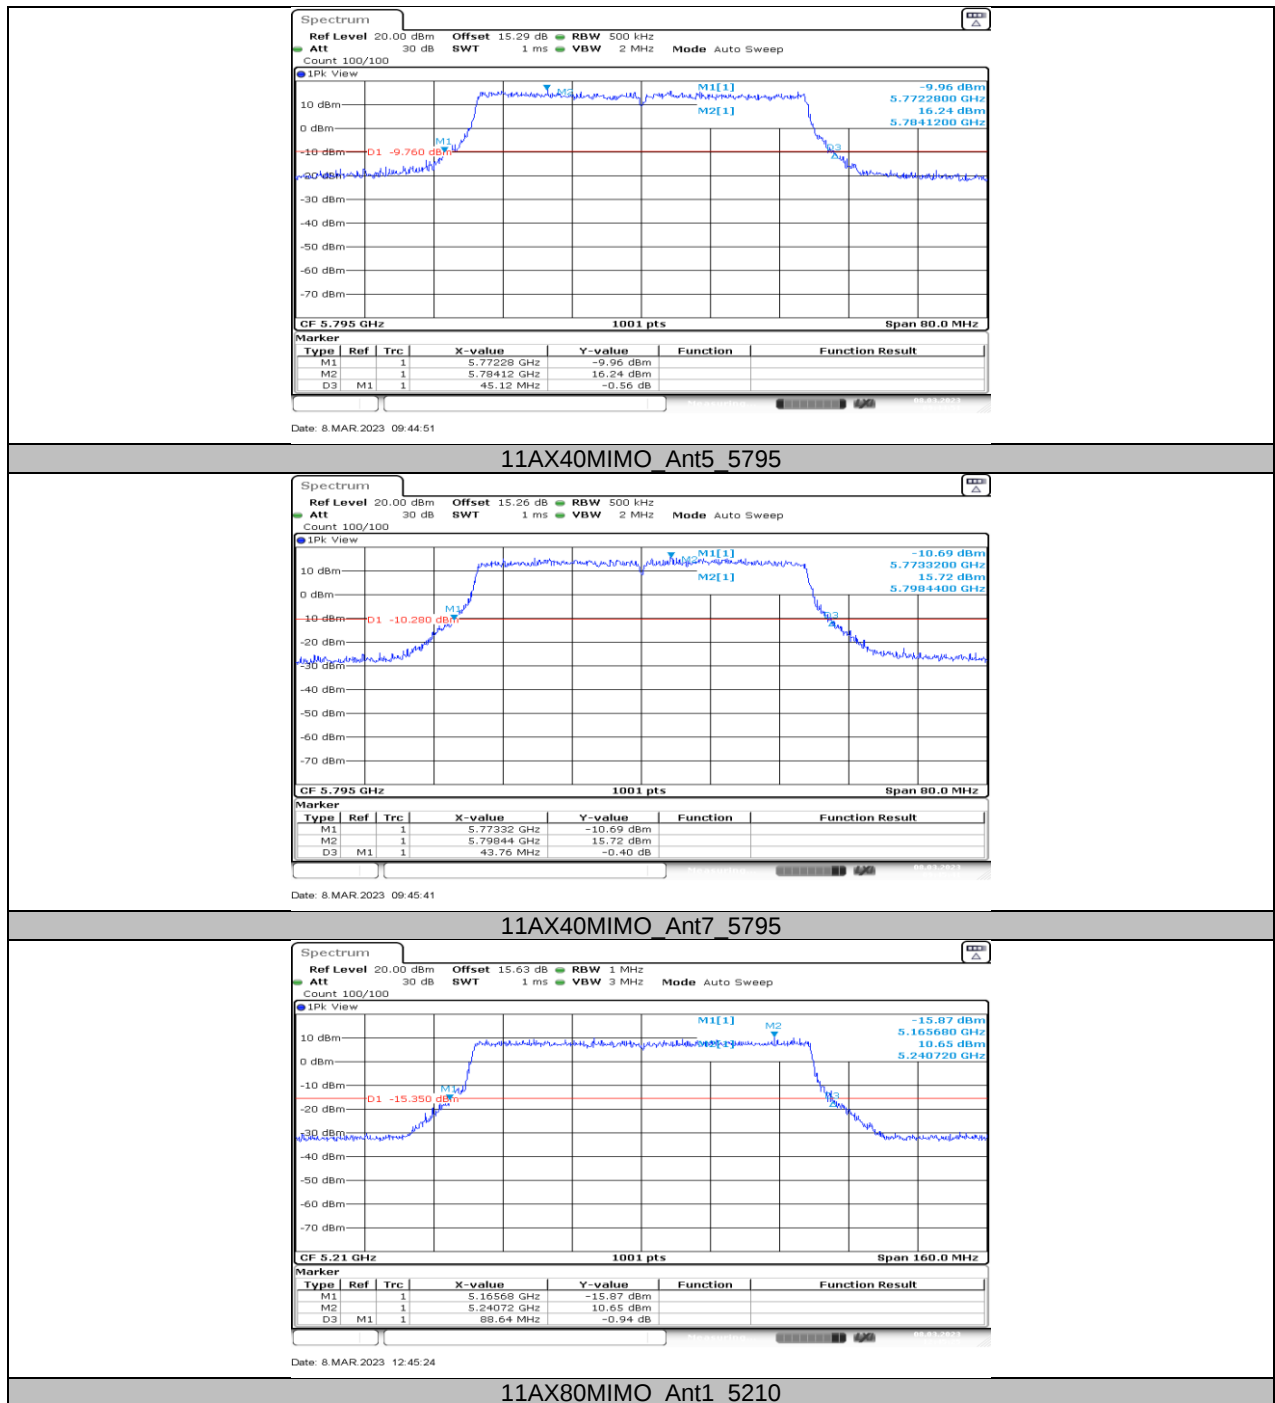

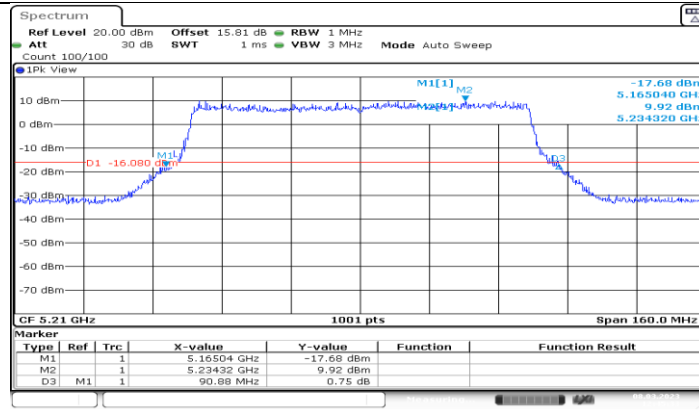


Date: 8.MAR.2023 12:45:33

### 11AX80MIMO\_Ant3\_5210

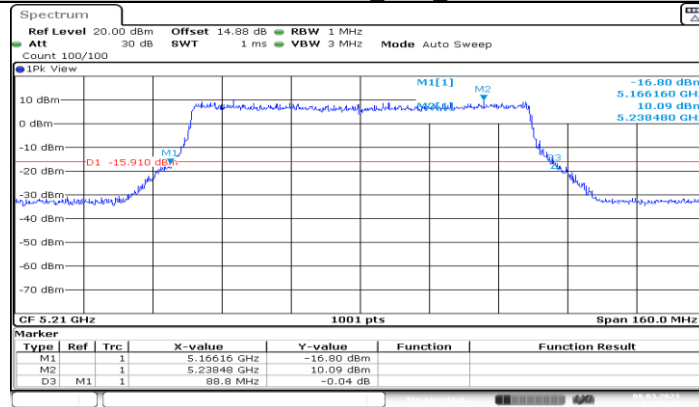


Date: 8.MAR.2023 12:45:41

### 11AX80MIMO\_Ant5\_5210

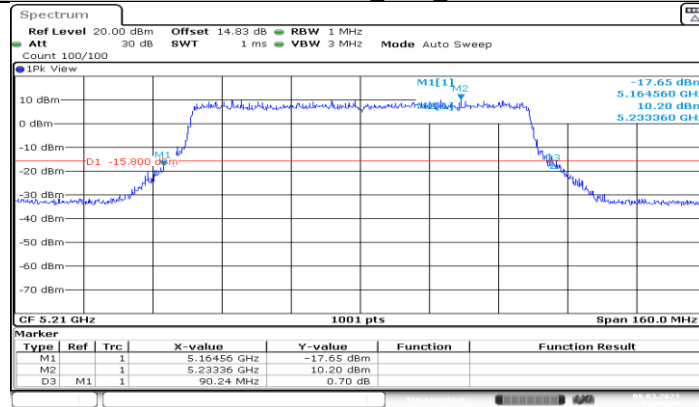


Date: 8.MAR.2023 12:45:49


### 11AX80MIMO\_Ant7\_5210

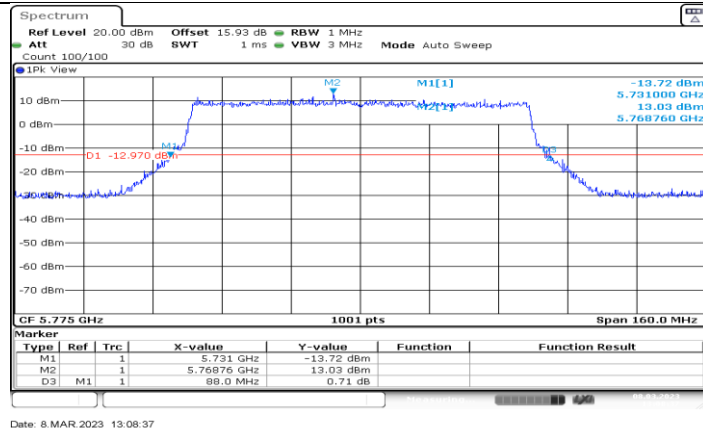

11AX80MIMO\_Ant1\_5775

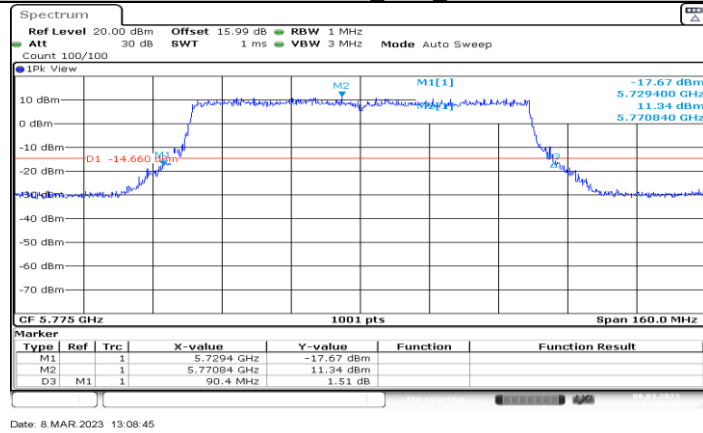

11AX80MIMO\_Ant3\_5775

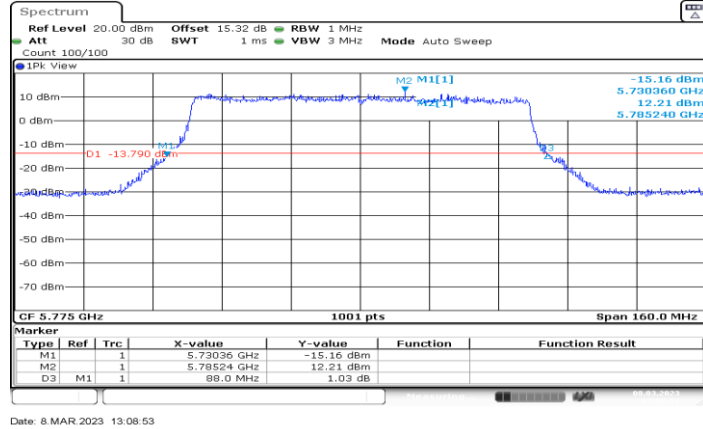

11AX80MIMO\_Ant5\_5775

