


Inverted F Antenna Specification

Summary


ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26	-0.76	-0.58	-6.73	-4.04	-2.46
MAX. Gain	-0.58dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD No. 333, Kexing Road, Xiangzhou District, Zhuhai City, Guangdong Province, China					

Antenna Photo & Length (mm)

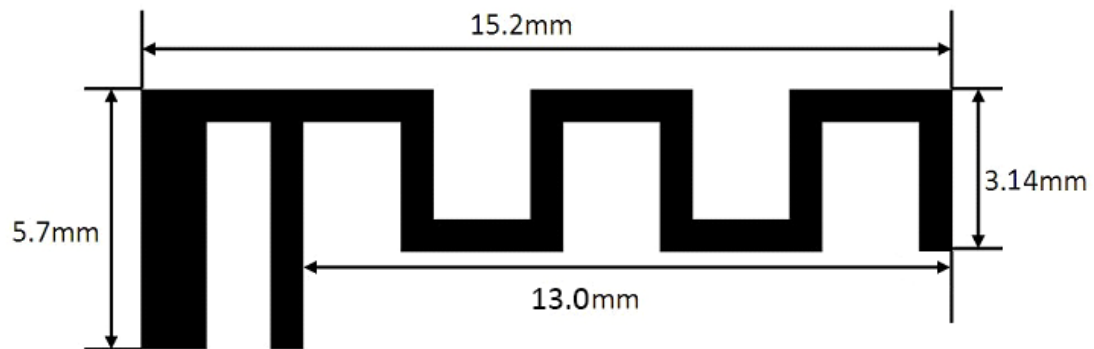

Horizontal: 2400 MHz 2450 MHz 2500 MHz


Max: 0dBi Min: -40dBi Scale: 5/div

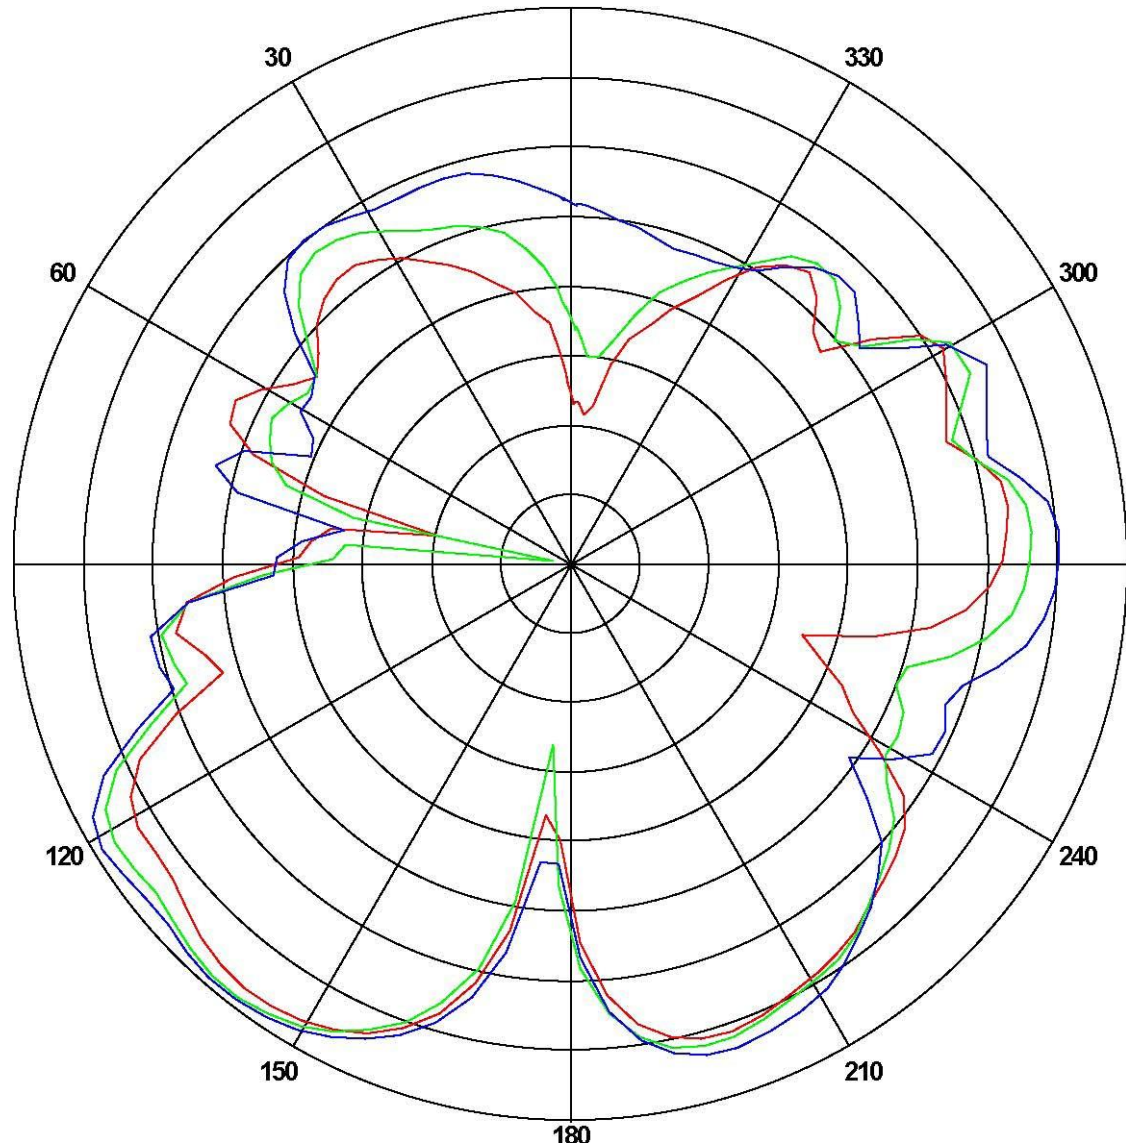

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26374	-30.0801	-7.18716
2450	-0.761802	-36.5604	-7.48023
2500	-0.582582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Max: 0dBi Min: -30dBi Scale: 5/div

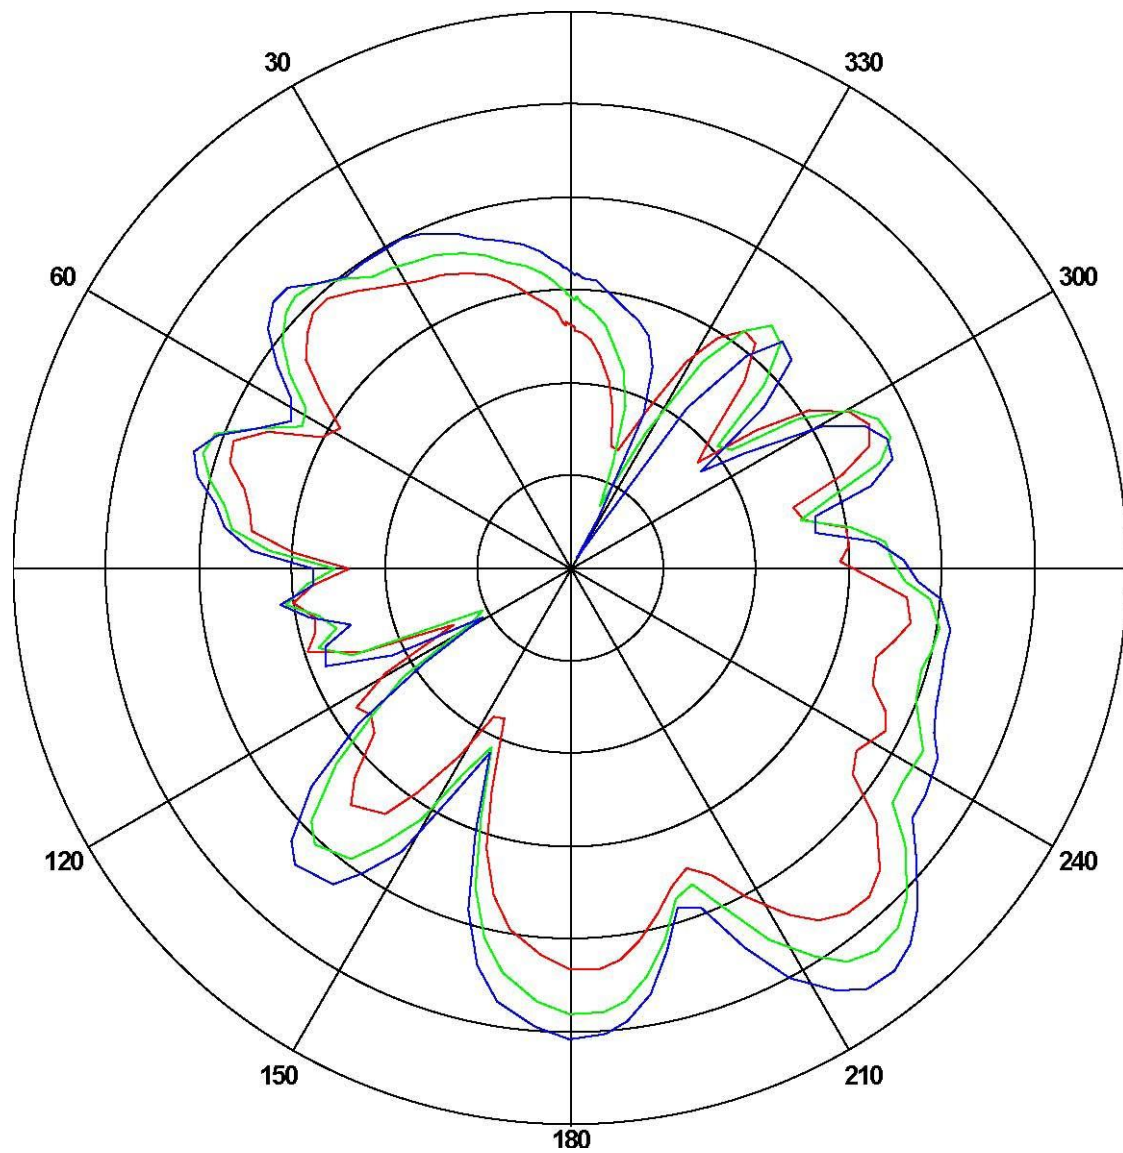

Frequency (MHz)	Gain (dBi)		
	Max	Min	Avg
2400	-6.7264	-22.1424	-12.4294
2450	-4.0395	-24.5837	-10.4702
2500	-2.4617	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.