


FCC SAR TEST REPORT

FCC ID : A4RG1F8F
Equipment : Phone
Model Name : G1F8F
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Dec 07, 2020 and testing was started from Dec 21, 2020 and completed on Feb 18, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Equipment Under Test (EUT) Information	5
2.1 General Information	5
2.2 Maximum Tune-up Limit	6
2.3 General LTE SAR Test and Reporting Considerations	17
2.4 General 5G NR SAR Test and Reporting Considerations	20
3. Smart Transmit feature for RF Exposure compliance	22
4. Guidance Applied	27
5. RF Exposure Limits	27
5.1 Uncontrolled Environment	27
5.2 Controlled Environment	27
6. Specific Absorption Rate (SAR)	28
6.1 Introduction	28
6.2 SAR Definition	28
7. System Description and Setup	29
7.1 Test Site Location	29
7.2 E-Field Probe	30
7.3 Data Acquisition Electronics (DAE)	30
7.4 Phantom	31
7.5 Device Holder	32
8. Measurement Procedures	33
8.1 Spatial Peak SAR Evaluation	33
8.2 Power Reference Measurement	34
8.3 Area Scan	34
8.4 Zoom Scan	35
8.5 Volume Scan Procedures	35
8.6 Power Drift Monitoring	35
9. Test Equipment List	36
10. System Verification	37
10.1 Tissue Verification	37
10.2 System Performance Check Results	39
11. RF Exposure Positions	41
11.1 Ear and handset reference point	41
11.2 Definition of the cheek position	42
11.3 Definition of the tilt position	43
11.4 Body Worn Accessory	43
11.5 Product Specific Exposure	44
11.6 Wireless Router	44
12. Measurement procedure for output power and SAR	45
13. DL/UL carrier aggregation	54
14. RF Exposure position consideration	61
15. SAR Test Results	62
15.1 Head SAR	65
15.2 Hotspot SAR	78
15.3 Body Worn Accessory SAR	95
15.4 Product Specific SAR	105
15.5 Repeated SAR Measurement	106
15.6 LTE Band 41 Power Class 2 and Power Class 3 Linearity	106
16. Simultaneous Transmission Analysis	108
16.1 5G NR + LTE + WLAN + BT Sim-Tx analysis	109
16.2 Head Exposure Conditions	110
16.3 Hotspot Exposure Conditions	115
16.4 Body-Worn Accessory Exposure Conditions	121
17. Supplemental Antenna tuner tests results	124
17.1 Supplemental Head SAR results	125
17.2 Supplemental Body SAR results	129
18. Uncertainty Assessment	133
19. References	133
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Output Power Measurement	
Appendix E. Test Setup Photos and Antenna Location	

History of this test report

Report No.	Version	Description	Issued Date
FA001507-01A	01	Initial issue of report	Apr. 06, 2021

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Google LLC, Phone, G1F8F, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)	
		1g SAR (W/kg)			10g SAR (W/kg)	
Licensed	GSM850	0.83	0.53	0.55		1.47
	GSM1900	0.19	0.60	0.79		
	WCDMA II	0.38	1.03	0.85		
	WCDMA IV	0.60	0.91	0.91		
	WCDMA V	0.97	0.47	0.51		
	CDMA BC0	1.13	0.51	0.50		
	CDMA BC1	0.50	1.00	0.88		
	CDMA BC10	1.11	0.46	0.50		
	LTE Band 7	0.52	0.85	0.73		
	LTE Band 12 / 17	0.82	0.47	0.47		
	LTE Band 13	0.75	0.38	0.38		
	LTE Band 14	0.64	0.36	0.36		
	LTE Band 2 / 25	0.53	0.86	0.99		
	LTE Band 5 / 26	0.86	0.40	0.41		
	LTE Band 30	0.33	0.86	0.86		
	LTE Band 38 / 41	0.31	0.91	0.91		
	LTE Band 48	0.47	1.09	0.90		
	LTE Band 4 / 66	0.49	0.97	0.89		
	LTE Band 71	0.48	0.39	0.39		
	FR1 n5	0.84	0.37	0.37		
	FR1 n12	0.49	0.18	0.23		
	FR1 n2 / n25	0.44	0.86	0.77		
	FR1 n41	0.42	0.99	0.91		
	FR1 n66	0.49	0.92	0.72		
	FR1 n71	0.54	0.23	0.26		
	FR1 n77 / n78	0.34	0.84	0.84		
DTS	2.4GHz WLAN	0.62	0.40	0.40		1.45
NII	5GHz WLAN	0.74	0.37	0.81	1.27	1.47
DSS	Bluetooth	0.13	0.10	0.10		1.47
Date of Testing:		2020/12/21 ~ 2021/2/18				

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang

Report Producer: Carlie Tsai



2. Equipment Under Test (EUT) Information

2.1 General Information

Product Feature & Specification	
Equipment Name	Phone
Model Name	G1F8F
FCC ID	A4RG1F8F
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2402 MHz ~ 2462 MHz WLAN U-NII 1: 5150 MHz ~ 5250 MHz WLAN U-NII 2: 5250 MHz ~ 5350 MHz WLAN U-NII 3: 5470 MHz ~ 5725 MHz WLAN U-NII 4: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
Remark: - This device implements open loop antenna tuning techniques for several WWAN (cellular) operating modes. Specifically, this technique is employed in the GSM, WCDMA, CDMA and LTE modes. The detail descriptions of the antenna tuner are included in the operational description. - The device implements the power management and sensor detection for SAR compliance at different exposure conditions (head, body-worn, hotspot/extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. - This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications	



2.2 Maximum Tune-up Limit

General Note:

1. For each cellular band, the device has several WWAN antennas, the antenna selection is based on the connection quality condition, and only one antenna will transmit at a time.
2. The device implements the power management and sensor detection for SAR compliance at different exposure conditions (head, body-worn, hotspot) by DSI and the Qualcomm Smart Transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description.
3. Below table shows maximum tune up output power configured for this EUT for various transmit conditions (Device State Index DSI) by manufacturer, and the detail power measurement and tune-up limit refer to appendix D
4. In the table below which the DSI may have difference output power level. If some DSI output power measurement was not include in the appendix D, because the same output power level has been presented within the other DSI and use the same level to do SAR tested.
5. The DSI 0 was not used for SAR testing, the other DSI may have the same power levels but DSI 0 is covered for all modes under the mobile RF exposure evaluation, please refer to Sporton's test report FA001507-01B

Antenna configuration	
Config*	Support transmit antenna and band
Config 0	ANT 0: GSM850, UMTS B5, CDMA BC0/BC10, LTE B5/B12/B13/B14/B17/B26/B71, NR n5/n12/n71 ANT 2: GSM1900, UMTS B2/B4, CDMA BC1, LTE B2/B4/B7/B25/B30/B66/B38/B41, NR n2/n25/n41/n66 ANT 5: NR n41 ANT 7: LTE B48, NR n77/n78
Config 1	ANT 0: GSM1900, UMTS B2/B4, CDMA BC1, LTE B2/B4/B7/B25/B30/B66/B38/B41, NR n2/n25/n41/n66 ANT 1: GSM850, UMTS B5, CDMA BC0/BC10, LTE B5/B12/B13/B14/B17/B26/B71, NR n5/n12/n71 ANT 2: LTE B48, NR n77/n78

*Config 0 and 1 means output ports of power measurement for different antennas and bands.

Config 0			Maximum Transmit Power Level (dBm)					
Radio Tech	Band Number	Antenna name	DSI_0	DSI_2	DSI_4	DSI_6	DSI_7	DSI_8
			Default	Head Standalone	Body Standalone	Hotspot Simultaneous Transmit	Head Simultaneous Transmit	Body Simultaneous Transmit
GSM/GPRS 1TX	850	ANT0	33.5	33.5	33.5	33.5	33.5	33.5
GPRS2TX	850	ANT0	32.5	32.5	32.5	32.5	32.5	32.5
GPRS3TX	850	ANT0	30.5	30.5	30.5	30.5	30.5	30.5
GPRS4TX	850	ANT0	29.5	29.5	29.5	29.5	29.5	29.5
EGPRS 1TX	850	ANT0	27.5	27.5	27.5	27.5	27.5	27.5
EGPRS 2TX	850	ANT0	27	27	27	27	27	27
EGPRS 3TX	850	ANT0	25	25	25	25	25	25
EGPRS 4TX	850	ANT0	23	23	23	23	23	23
GSM/GPRS 1TX	1900	ANT2	30.5	30.5	30.5	30.5	30.5	30.5
GPRS2TX	1900	ANT2	29.7	29.7	29.7	29.7	29.7	29.7
GPRS3TX	1900	ANT2	28	28	28	28	28	28
GPRS4TX	1900	ANT2	27	27	27	27	27	27
EGPRS 1TX	1900	ANT2	26.5	26.5	26.5	26.5	26.5	26.5
EGPRS 2TX	1900	ANT2	26	26	26	26	26	26
EGPRS 3TX	1900	ANT2	25	25	25	25	25	25
EGPRS 4TX	1900	ANT2	24	24	24	24	24	24
WCDMA AMR/RMC	B2	ANT2	25.7	25.7	25.7	24.9	25.7	24.9
WCDMA HSDPA/HSPA	B2	ANT2	24.7	24.7	24.7	23.9	24.7	23.9
WCDMA AMR/RMC	B4	ANT2	25.7	25.7	25.2	24.4	25.7	24.6
WCDMA HSDPA/HSPA	B4	ANT2	24.7	24.7	24.2	23.4	24.7	23.6
WCDMA AMR/RMC	B5	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
WCDMA HSDPA/HSPA	B5	ANT0	24.7	24.7	24.7	24.7	24.7	24.7
CDMA	BC0	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
CDMA	BC1	ANT2	25.5	25.5	25.1	24.3	25.5	24.3
CDMA	BC10	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
LTE	B2	ANT2	25.7	25.7	24.8	24	25.7	24.4



FCC SAR TEST REPORT

Report No. : FA001507-01A

LTE	B4	ANT2	25.7	25.7	24.8	24	25.7	24
LTE	B5	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B7	ANT2	25.7	25.7	24.1	23.3	25.7	23.3
LTE	B12	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B13	ANT0	25.2	25.2	25.2	25.2	25.2	25.2
LTE	B14	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B17	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B25	ANT2	25.7	25.7	24.8	24	25.7	24.4
LTE	B26	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B30	ANT2	24.2	24.2	24.2	24.2	24.2	24.2
LTE	B38	ANT2	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B41 PC3	ANT2	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B41 HPUE PC2	ANT2	27.5	27.5	27.5	27.5	27.5	27.5
LTE	B48	ANT7	25.7	25.7	24.1	23.3	25.7	23.3
LTE	B66	ANT2	25.7	25.7	24.8	24	25.7	24
LTE	B71	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
5G FR1	n2	ANT2	25.7	25.7	25.1	24.3	25.7	24.7
5G FR1	n5	ANT0	25	25	25	25	25	25
5G FR1	n12	ANT0	24.7	24.7	24.7	24.7	24.7	24.7
5G FR1	n25	ANT2	25.7	25.7	25.1	24.3	25.7	24.7
5G FR1	n41 PC3	ANT2	25.7	25.7	25.7	25.7	25.7	25.7
5G FR1	n41 PC3	ANT5	25.7	25.7	25.7	25.7	25.7	25.7
5G FR1	n41 HPUE PC2	ANT5	27.5	27.5	26.8	25.9	27.5	26.8
5G FR1	n66	ANT2	25.7	25.7	25.1	24.3	25.7	24.3
5G FR1	n71	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
5G FR1	n77 PC3	ANT7	25.7	25.7	25.7	25.7	25.7	25.7
5G FR1	n77 HPUE PC2	ANT7	26.5	26.5	26.5	26.5	26.5	26.5
5G FR1	n78 PC3	ANT7	25	25	25	25	25	25
5G FR1	n78 HPUE PC2	ANT7	26.5	26.5	26.5	26.5	26.5	26.5

Config 1			Maximum Transmit Power Level (dBm)					
Radio Tech	Band Number	Antenna name	DSI_0	DSI_2	DSI_4	DSI_6	DSI_7	DSI_8
			Default	Head Standalone	Body Standalone	Hotspot Simultaneous Transmit	Head Simultaneous Transmit	Body Simultaneous Transmit
GSM/GPRS 1TX	850	ANT1	32.2	32.2	32.2	32.2	32.2	32.2
GPRS2TX	850	ANT1	31.2	31.2	31.2	31.2	31.2	31.2
GPRS3TX	850	ANT1	29.2	29.2	29.2	29.2	29.2	29.2
GPRS4TX	850	ANT1	28.2	28.2	28.2	28.2	28.2	28.2
EGPRS 1TX	850	ANT1	26.5	26.5	26.5	26.5	26.5	26.5
EGPRS 2TX	850	ANT1	26	26	26	26	26	26
EGPRS 3TX	850	ANT1	24	24	24	24	24	24
EGPRS 4TX	850	ANT1	22	22	22	22	22	22
GSM/GPRS 1TX	1900	ANT0	30.2	30.2	30.2	30.2	30.2	30.2
GPRS2TX	1900	ANT0	29.7	29.7	29.7	29.7	29.7	29.7
GPRS3TX	1900	ANT0	27.7	27.7	27.7	27.7	27.7	27.7
GPRS4TX	1900	ANT0	26.7	26.7	26.7	26.7	26.7	26.7
EGPRS 1TX	1900	ANT0	26.5	26.5	26.5	26.5	26.5	26.5
EGPRS 2TX	1900	ANT0	26	26	26	26	26	26
EGPRS 3TX	1900	ANT0	25	25	25	25	25	25
EGPRS 4TX	1900	ANT0	24	24	24	24	24	24
WCDMA AMR/RMC	B2	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
WCDMA HSDPA/HSPA	B2	ANT0	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA AMR/RMC	B4	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
WCDMA HSDPA/HSPA	B4	ANT0	24.5	24.5	24.5	24.5	24.5	24.5
WCDMA AMR/RMC	B5	ANT1	25	25	25	25	25	25
WCDMA HSDPA/HSPA	B5	ANT1	24	24	24	24	24	24



CDMA	BC0	ANT1	25.5	25.4	25.5	25.5	24.6	25.5
CDMA	BC1	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
CDMA	BC10	ANT1	25.5	25.5	25.5	25.5	24.7	25.5
LTE	B2	ANT0	25.5	25.5	25.5	25.1	25.5	25.5
LTE	B4	ANT0	25.5	25.5	25.5	25.1	25.5	25.1
LTE	B5	ANT1	25	25	25	25	25	25
LTE	B7	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
LTE	B12	ANT1	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B13	ANT1	25	25	25	25	25	25
LTE	B14	ANT1	25	25	25	25	25	25
LTE	B17	ANT1	25	25	25	25	25	25
LTE	B25	ANT0	25.5	25.5	25.5	25.1	25.5	25.5
LTE	B26	ANT1	25	25	25	25	25	25
LTE	B30	ANT0	25.7	25.7	25.7	25.7	25.7	25.7
LTE	B38	ANT0	25.2	25.2	25.2	25.2	25.2	25.2
LTE	B41 PC3	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
LTE	B41 HPUE PC2	ANT0	27	27	27	27	27	27
LTE	B48	ANT2	25.7	25.7	24.9	24.1	25.7	24.1
LTE	B66	ANT0	25.5	25.5	25.5	25.1	25.5	25.1
LTE	B71	ANT1	25	25	25	25	25	25
5G FR1	n2	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n5	ANT1	25	25	25	25	25	25
5G FR1	n12	ANT1	23	23	23	23	23	23
5G FR1	n25	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n41 PC3	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n66	ANT0	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n71	ANT1	25	25	25	25	25	25
5G FR1	n77 PC3	ANT2	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n77 HPUE PC2	ANT2	26	26	26	26	26	26
5G FR1	n78 PC3	ANT2	25.5	25.5	25.5	25.5	25.5	25.5
5G FR1	n78 HPUE PC2	ANT2	26	26	26	26	26	26

<WLAN Maximum Power>
General Note:

1. The device implements the power management for WLAN SAR compliance at different exposure conditions (head, body-worn, hotspot). The control logic about the power management decision is provided in the operational description.
2. The WLAN power table relate to each exposure condition is description below:
 - a. Default Power Table: when operate at mobile condition.
 - b. Power Table 1: when operate at body or extremity condition in standalone or transmit simultaneous with Bluetooth when WWAN off
 - c. Power Table 2: when operate at head exposure condition.
 - d. Power Table 3: when operate at hotspot or body exposure condition when transmit simultaneously with WWAN on.

<Default Power Table>
<2.4GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.00	20.00	20.00	20.00	23.0
		6	2437	20.00	20.00	20.00	20.00	23.0
		11	2462	20.00	20.00	20.00	20.00	23.0
	802.11g 6Mbps	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	20.00	20.00	20.00	20.00	23.0
		11	2462	18.00	18.00	18.00	18.00	21.0
	802.11n-HT20 MCS0	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	19.50	19.50	19.50	19.50	22.5
		11	2462	16.00	16.00	16.00	16.00	19.0
	802.11ac-VHT20 MCS0	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	19.50	19.50	19.50	19.50	22.5
		11	2462	16.00	16.00	16.00	16.00	19.0

<5GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11n-HT20 MCS0	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11n-HT40 MCS0	38	5190	17.00	17.00	17.00	17.00	20.0
		46	5230	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	38	5190	17.00	17.00	17.00	17.00	20.0
		46	5230	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	42	5210	16.50	16.50	16.50	16.50	19.5

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11n-HT20 MCS0	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11n-HT40 MCS0	54	5270	17.50	17.50	17.50	17.50	20.5
		62	5310	17.00	17.00	17.00	17.00	20.0
	802.11ac-VHT20 MCS0	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	54	5270	17.50	17.50	17.50	17.50	20.5
		62	5310	17.00	17.00	17.00	17.00	20.0
	802.11ac-VHT80 MCS0	58	5290	16.00	16.00	16.00	16.00	19.0

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.50	17.50	17.50	17.50	20.5
		116	5580	17.50	17.50	17.50	17.50	20.5
		124	5620	17.50	17.50	17.50	17.50	20.5
		132	5660	17.50	17.50	17.50	17.50	20.5
		140	5700	17.50	17.50	17.50	17.50	20.5
		144	5720	17.50	17.50	17.50	17.50	20.5
	802.11n-HT20 MCS0	100	5500	17.50	17.50	17.50	17.50	20.5
		116	5580	17.50	17.50	17.50	17.50	20.5
		124	5620	17.50	17.50	17.50	17.50	20.5
		132	5660	17.50	17.50	17.50	17.50	20.5
		140	5700	17.50	17.50	17.50	17.50	20.5
		144	5720	17.50	17.50	17.50	17.50	20.5
	802.11n-HT40 MCS0	102	5510	16.00	16.00	16.00	16.00	19.0
		110	5550	17.50	17.50	17.50	17.50	20.5
		126	5630	17.50	17.50	17.50	17.50	20.5
		134	5670	17.50	17.50	17.50	17.50	20.5
		142	5710	17.50	17.50	17.50	17.50	20.5
		144	5720	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	100	5500	17.50	17.50	17.50	17.50	20.5
		116	5580	17.50	17.50	17.50	17.50	20.5
		124	5620	17.50	17.50	17.50	17.50	20.5
		132	5660	17.50	17.50	17.50	17.50	20.5
		140	5700	17.50	17.50	17.50	17.50	20.5
		144	5720	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	102	5510	16.00	16.00	16.00	16.00	19.0
		110	5550	17.50	17.50	17.50	17.50	20.5
		126	5630	17.50	17.50	17.50	17.50	20.5
		134	5670	17.50	17.50	17.50	17.50	20.5
		142	5710	17.50	17.50	17.50	17.50	20.5
		144	5720	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	106	5530	14.50	14.50	14.50	14.50	17.5
		122	5610	17.00	17.00	17.00	17.00	20.0
		138	5690	17.00	17.00	17.00	17.00	20.0
		144	5720	17.50	17.50	17.50	17.50	20.5

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.8GHz WLAN	802.11a 6Mbps	149	5745	19.50	19.50	19.50	19.50	22.5
		157	5785	19.50	19.50	19.50	19.50	22.5
		165	5825	19.50	19.50	19.50	19.50	22.5
	802.11n-HT20 MCS0	149	5745	19.50	19.50	19.50	19.50	22.5
		157	5785	19.50	19.50	19.50	19.50	22.5
		165	5825	19.50	19.50	19.50	19.50	22.5
	802.11n-HT40 MCS0	151	5755	17.50	17.50	17.50	17.50	20.5
		159	5795	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	149	5745	19.50	19.50	19.50	19.50	22.5
		157	5785	19.50	19.50	19.50	19.50	22.5
		165	5825	19.50	19.50	19.50	19.50	22.5
	802.11ac-VHT40 MCS0	151	5755	17.50	17.50	17.50	17.50	20.5
		159	5795	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	155	5775	17.00	17.00	17.00	17.00	20.0

<Power Table 2>
<2.4GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.00	19.00	18.00	20.00	22.1
		6	2437	16.00	19.00	18.00	20.00	22.1
		11	2462	16.00	19.00	18.00	20.00	22.1
	802.11g 6Mbps	1	2412	16.00	17.50	17.50	17.50	20.5
		6	2437	16.00	19.00	18.00	20.00	22.1
		11	2462	16.00	18.00	18.00	18.00	21.0
	802.11n-HT20 MCS0	1	2412	16.00	17.50	17.50	17.50	20.5
		6	2437	16.00	19.00	18.00	19.50	21.8
		11	2462	16.00	16.00	16.00	16.00	19.0
	802.11ac-VHT20 MCS0	1	2412	16.00	17.50	17.50	17.50	20.5
		6	2437	16.00	19.00	18.00	19.50	21.8
		11	2462	16.00	16.00	16.00	16.00	19.0

<5GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.2GHz WLAN	802.11a 6Mbps	36	5180	15.50	17.00	15.50	17.50	19.6
		40	5200	15.50	17.00	15.50	17.50	19.6
		44	5220	15.50	17.00	15.50	17.50	19.6
		48	5240	15.50	17.00	15.50	17.50	19.6
	802.11n-HT20 MCS0	36	5180	15.50	17.00	15.50	17.50	19.6
		40	5200	15.50	17.00	15.50	17.50	19.6
		44	5220	15.50	17.00	15.50	17.50	19.6
		48	5240	15.50	17.00	15.50	17.50	19.6
	802.11n-HT40 MCS0	38	5190	15.50	17.00	15.50	17.00	19.3
		46	5230	15.50	17.00	15.50	17.50	19.6
	802.11ac-VHT20 MCS0	36	5180	15.50	17.00	15.50	17.50	19.6
		40	5200	15.50	17.00	15.50	17.50	19.6
		44	5220	15.50	17.00	15.50	17.50	19.6
		48	5240	15.50	17.00	15.50	17.50	19.6
	802.11ac-VHT40 MCS0	38	5190	15.50	17.00	15.50	17.00	19.3
		46	5230	15.50	17.00	15.50	17.50	19.6
	802.11ac-VHT80 MCS0	42	5210	15.50	16.50	15.50	16.50	19.0

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.50	17.00	15.50	17.50	19.6
		56	5280	15.50	17.00	15.50	17.50	19.6
		60	5300	15.50	17.00	15.50	17.50	19.6
		64	5320	15.50	17.00	15.50	17.50	19.6
	802.11n-HT20 MCS0	52	5260	15.50	17.00	15.50	17.50	19.6
		56	5280	15.50	17.00	15.50	17.50	19.6
		60	5300	15.50	17.00	15.50	17.50	19.6
		64	5320	15.50	17.00	15.50	17.50	19.6
	802.11n-HT40 MCS0	54	5270	15.50	17.00	15.50	17.50	19.6
		62	5310	15.50	17.00	15.50	17.00	19.3
	802.11ac-VHT20 MCS0	52	5260	15.50	17.00	15.50	17.50	19.6
		56	5280	15.50	17.00	15.50	17.50	19.6
		60	5300	15.50	17.00	15.50	17.50	19.6
		64	5320	15.50	17.00	15.50	17.50	19.6
	802.11ac-VHT40 MCS0	54	5270	15.50	17.00	15.50	17.50	19.6
		62	5310	15.50	17.00	15.50	17.00	19.3
	802.11ac-VHT80 MCS0	58	5290	15.50	16.00	15.50	16.00	18.8

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.5GHz WLAN	802.11a 6Mbps	100	5500	14.50	15.00	14.50	15.50	18.0
		116	5580	14.50	15.00	14.50	15.50	18.0
		124	5620	14.50	15.00	14.50	15.50	18.0
		132	5660	14.50	15.00	14.50	15.50	18.0
		140	5700	14.50	15.00	14.50	15.50	18.0
		144	5720	14.50	15.00	14.50	15.50	18.0
	802.11n-HT20 MCS0	100	5500	14.50	15.00	14.50	15.50	18.0
		116	5580	14.50	15.00	14.50	15.50	18.0
		124	5620	14.50	15.00	14.50	15.50	18.0
		132	5660	14.50	15.00	14.50	15.50	18.0
		140	5700	14.50	15.00	14.50	15.50	18.0
		144	5720	14.50	15.00	14.50	15.50	18.0
	802.11n-HT40 MCS0	102	5510	14.50	15.00	14.50	15.50	18.0
		110	5550	14.50	15.00	14.50	15.50	18.0
		126	5630	14.50	15.00	14.50	15.50	18.0
		134	5670	14.50	15.00	14.50	15.50	18.0
		142	5710	14.50	15.00	14.50	15.50	18.0
	802.11ac-VHT20 MCS0	100	5500	14.50	15.00	14.50	15.50	18.0
		116	5580	14.50	15.00	14.50	15.50	18.0
		124	5620	14.50	15.00	14.50	15.50	18.0
		132	5660	14.50	15.00	14.50	15.50	18.0
		140	5700	14.50	15.00	14.50	15.50	18.0
		144	5720	14.50	15.00	14.50	15.50	18.0
	802.11ac-VHT40 MCS0	102	5510	14.50	15.00	14.50	15.50	18.0
		110	5550	14.50	15.00	14.50	15.50	18.0
		126	5630	14.50	15.00	14.50	15.50	18.0
		134	5670	14.50	15.00	14.50	15.50	18.0
		142	5710	14.50	15.00	14.50	15.50	18.0
	802.11ac-VHT80 MCS0	106	5530	14.50	14.50	14.50	14.50	17.5
		122	5610	14.50	15.00	14.50	15.50	18.0
		138	5690	14.50	15.00	14.50	15.50	18.0

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.8GHz WLAN	802.11a 6Mbps	149	5745	15.00	15.00	14.50	17.00	18.9
		157	5785	15.00	15.00	14.50	17.00	18.9
		165	5825	15.00	15.00	14.50	17.00	18.9
	802.11n-HT20 MCS0	149	5745	15.00	15.00	14.50	17.00	18.9
		157	5785	15.00	15.00	14.50	17.00	18.9
		165	5825	15.00	15.00	14.50	17.00	18.9
	802.11n-HT40 MCS0	151	5755	15.00	15.00	14.50	17.00	18.9
		159	5795	15.00	15.00	14.50	17.00	18.9
	802.11ac-VHT20 MCS0	149	5745	15.00	15.00	14.50	17.00	18.9
		157	5785	15.00	15.00	14.50	17.00	18.9
		165	5825	15.00	15.00	14.50	17.00	18.9
	802.11ac-VHT40 MCS0	151	5755	15.00	15.00	14.50	17.00	18.9
		159	5795	15.00	15.00	14.50	17.00	18.9
	802.11ac-VHT80 MCS0	155	5775	15.00	15.00	14.50	17.00	18.9

<Power Table 1 / 3>
<2.4GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
2.4GHz WLAN	802.11b 1Mbps	1	2412	20.00	20.00	20.00	20.00	23.0
		6	2437	20.00	20.00	20.00	20.00	23.0
		11	2462	20.00	20.00	20.00	20.00	23.0
	802.11g 6Mbps	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	20.00	20.00	20.00	20.00	23.0
		11	2462	18.00	18.00	18.00	18.00	21.0
	802.11n-HT20 MCS0	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	19.50	19.50	19.50	19.50	22.5
		11	2462	16.00	16.00	16.00	16.00	19.0
	802.11ac-VHT20 MCS0	1	2412	17.50	17.50	17.50	17.50	20.5
		6	2437	19.50	19.50	19.50	19.50	22.5
		11	2462	16.00	16.00	16.00	16.00	19.0

<5GHz WLAN>

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.2GHz WLAN	802.11a 6Mbps	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11n-HT20 MCS0	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11n-HT40 MCS0	38	5190	17.00	17.00	17.00	17.00	20.0
		46	5230	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	36	5180	17.50	17.50	17.50	17.50	20.5
		40	5200	17.50	17.50	17.50	17.50	20.5
		44	5220	17.50	17.50	17.50	17.50	20.5
		48	5240	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	38	5190	17.00	17.00	17.00	17.00	20.0
		46	5230	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	42	5210	16.50	16.50	16.50	16.50	19.5

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.3GHz WLAN	802.11a 6Mbps	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11n-HT20 MCS0	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11n-HT40 MCS0	54	5270	17.50	17.50	17.50	17.50	20.5
		62	5310	17.00	17.00	17.00	17.00	20.0
	802.11ac-VHT20 MCS0	52	5260	17.50	17.50	17.50	17.50	20.5
		56	5280	17.50	17.50	17.50	17.50	20.5
		60	5300	17.50	17.50	17.50	17.50	20.5
		64	5320	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	54	5270	17.50	17.50	17.50	17.50	20.5
		62	5310	17.00	17.00	17.00	17.00	20.0
	802.11ac-VHT80 MCS0	58	5290	16.00	16.00	16.00	16.00	19.0

Transmit Antenna				SISO	SISO	MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.5GHz WLAN	802.11a 6Mbps	100	5500	17.50	15.00	17.50	17.50	20.5
		116	5580	17.50	15.00	17.50	17.50	20.5
		124	5620	17.50	15.00	17.50	17.50	20.5
		132	5660	17.50	15.00	17.50	17.50	20.5
		140	5700	17.50	15.00	17.50	17.50	20.5
		144	5720	17.50	15.00	17.50	17.50	20.5
	802.11n-HT20 MCS0	100	5500	17.50	15.00	17.50	17.50	20.5
		116	5580	17.50	15.00	17.50	17.50	20.5
		124	5620	17.50	15.00	17.50	17.50	20.5
		132	5660	17.50	15.00	17.50	17.50	20.5
		140	5700	17.50	15.00	17.50	17.50	20.5
		144	5720	17.50	15.00	17.50	17.50	20.5
	802.11n-HT40 MCS0	102	5510	16.00	15.00	16.00	16.00	19.0
		110	5550	17.50	15.00	17.50	17.50	20.5
		126	5630	17.50	15.00	17.50	17.50	20.5
		134	5670	17.50	15.00	17.50	17.50	20.5
		142	5710	17.50	15.00	17.50	17.50	20.5
		144	5720	17.50	15.00	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	100	5500	17.50	15.00	17.50	17.50	20.5
		116	5580	17.50	15.00	17.50	17.50	20.5
		124	5620	17.50	15.00	17.50	17.50	20.5
		132	5660	17.50	15.00	17.50	17.50	20.5
		140	5700	17.50	15.00	17.50	17.50	20.5
		144	5720	17.50	15.00	17.50	17.50	20.5
	802.11ac-VHT40 MCS0	102	5510	16.00	15.00	16.00	16.00	19.0
		110	5550	17.50	15.00	17.50	17.50	20.5
		126	5630	17.50	15.00	17.50	17.50	20.5
		134	5670	17.50	15.00	17.50	17.50	20.5
		142	5710	17.50	15.00	17.50	17.50	20.5
		144	5720	17.50	15.00	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	106	5530	14.50	14.50	14.50	14.50	17.5
		122	5610	17.00	15.00	17.00	17.00	20.0
		138	5690	17.00	15.00	17.00	17.00	20.0

Transmit Antenna				SISO	SISO	MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4 Tune-Up Limit	Ant 3 Tune-Up Limit	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	149	5745	19.50	17.50	19.50	19.50	22.5
		157	5785	19.50	17.50	19.50	19.50	22.5
		165	5825	19.50	17.50	19.50	19.50	22.5
	802.11n-HT20 MCS0	149	5745	19.50	17.50	19.50	19.50	22.5
		157	5785	19.50	17.50	19.50	19.50	22.5
		165	5825	19.50	17.50	19.50	19.50	22.5
	802.11n-HT40 MCS0	151	5755	17.50	17.50	17.50	17.50	20.5
		159	5795	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT20 MCS0	149	5745	19.50	17.50	19.50	19.50	22.5
		157	5785	19.50	17.50	19.50	19.50	22.5
		165	5825	19.50	17.50	19.50	19.50	22.5
	802.11ac-VHT40 MCS0	151	5755	17.50	17.50	17.50	17.50	20.5
		159	5795	17.50	17.50	17.50	17.50	20.5
	802.11ac-VHT80 MCS0	155	5775	17.00	17.00	17.00	17.00	20.0

<Bluetooth Maximum Power>

General Note:

1. The device implements the power management for Bluetooth SAR compliance at different exposure conditions (head, body-worn, hotspot). The control logic about the power management decision is provided in the operational description.
2. The Bluetooth power table relate to each exposure condition is description below:
 - a. Default Power Table: when operate at mobile condition.
 - b. Power Table 1: when operate at body or extremity condition in standalone or transmit simultaneous with WLAN when WWAN off or transmit simultaneous with WWAN when WLAN off.
 - c. Power Table 2: when operate at head exposure condition.
 - d. Power Table 3: when operate at hotspot or body exposure condition and transmit simultaneously with WWAN/WLAN on.

<Default and Power Table 1, 3>

Mode	Average power (dBm)				
	BR / EDR			LE	
	1Mbps	2Mbps	3Mbps	1Mbps	2Mbps
Tune-up Limit	18	18	18	18	18

<Power Table2>

Mode	Average power (dBm)				
	BR / EDR			LE	
	1Mbps	2Mbps	3Mbps	1Mbps	2Mbps
Tune-up Limit	14.5	14.5	14.5	14.5	14.5

2.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																							
FCC ID	A4RG1F8F																																																																						
Equipment Name	Phone																																																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz																																																																						
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																																						
uplink modulations used	QPSK / 16QAM / 64QAM																																																																						
LTE Voice / Data requirements	Voice and Data																																																																						
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table>	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3																																																																							
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																
256 QAM	≥ 1						≤ 5																																																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																						
Power reduction applied to satisfy SAR compliance	The device has several different power modes for each exposure conditions SAR compliance; power selection is determined by the device's positioning and usage scenarios. Detail refer to operational description.																																																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 13																																																																						
LTE Carrier Aggregation Additional Information	This device supports maximum of 4 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band														
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 5														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829						
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5						
H	20643	848.3	20635	847.5	20625	846.5	20600	844						
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510						
M	21100	2535	21100	2535	21100	2535	21100	2535						
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560						
LTE Band 12														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704						
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5						
H	23173	715.3	23165	714.5	23155	713.5	23130	711						
LTE Band 13														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)							
L	23205		779.5		23230		782							
M	23230		782											
H	23255		784.5											
LTE Band 14														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Channel #		Channel #		Freq.(MHz)							
L	23305		790.5		23330		793							
M	23330		793											
H	23355		795.5											
LTE Band 17														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)							
L	23755		706.5		23780		709							
M	23790		710		23790		710							
H	23825		713.5		23800		711							

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #			Freq.(MHz)		Channel #				Freq.(MHz)		
L	27685			2307.5		27710				2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L M	55810	3607	55815	3607.5	55820	3608	55830	3609				
M H	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				



2.4 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
FCC	A4RG1F8F							
Equipment Name	Phone							
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n12: 699 MHz ~ 716 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz							
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n12: 5MHz, 10MHz, 15MHz 5G NR n25 : 5MHz, 10MHz, 15MHz, 20MHz 5G NR n41: 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n77: 20MHz, 40MHz, 100MHz 5G NR n78: 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz							
SCS	FDD: SCS15KHz, TDD: SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n2	LTE B5/12/13/14/30/48/66							
LTE Anchor Bands for n5	LTE B2/7/30/48/66							
LTE Anchor Bands for n12	LTE B2/66							
LTE Anchor Bands for n25	LTE B12							
LTE Anchor Bands for n41	LTE B2/4/25/26/66							
LTE Anchor Bands for n66	LTE B5/7/12/13/14/30/48/71							
LTE Anchor Bands for n71	LTE B2/7/66							
LTE Anchor Bands for n77	LTE B2/13/41/66							
LTE Anchor Bands for n78	LTE B2/4/5/7/12/13/38/41/66/71							
Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839
NR Band 12								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	140300	701.5	140800	704	141300	706.5	141800	709.5
M	141500	707.5	141500	707.5	141500	707.5	141500	707.5
H	142700	713.5	142200	711	141700	708.5	141200	705.5
NR Band 25								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376500	1882.5	376500	1882.5	376500	1882.5	376500	1882.5
H	382500	1912.5	382000	1910	381500	1907.5	381000	1905

NR Band 41																
	Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501204	2506.02	502200	2511	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534996	2674.98	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640
NR Band 66																
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz						
	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)				
L	342500		1712.5	343000		1715	343500		1717.5	344000		1720				
M	349000		1745	349000		1745	349000		1745	349000		1745				
H	355500		1777.5	355000		1775	354500		1772.5	354000		1770				
NR Band 71																
	Bandwidth 5MHz			Bandwidth 10MHz			Bandwidth 15MHz			Bandwidth 20MHz						
	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)	Ch. #		Freq. (MHz)				
L	133100		665.5	133600		668	13410		670.5	134600		673				
M	136100		680.5	136100		680.5	136100		680.5	136100		680.5				
H	139100		695.5	138600		693	13810		690.5	137600		688				
NR Band 77																
	Bandwidth 20MHz				Bandwidth 40MHz				Bandwidth 100MHz							
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)					
L	647334		3710.01		648000		3720		650000		3750					
M	656000		3840		656000		3840		656000		3840					
H	664668		3970.02		664000		3960		662000		3930					
NR Band 78																
	Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	647334	3710.01	648000	3720	648334	3725.01	648668	3730.02	649334	3740.01	649668	3745.02				
M	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750		
H	652668	3790.02	652000	3780	651668	3775.02	651334	3770.01	650668	3760.02	650334	3755.01				

3. Smart Transmit feature for RF Exposure compliance

The FCC RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency $\leq 6\text{GHz}$). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR char	P_{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6\text{ GHz}$.

<SAR design target and uncertainty>

Config 0													
Band	Config	Antenna	TDD duty cycle	DSI 2		DSI 7		DSI 6		DSI 4		DSI 8	
				1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty
GSM850(GPRS 4 Tx slots)	0	0	50.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
GSM1900(GPRS 4 Tx slots)	0	2	50.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
WCDMA B2	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
WCDMA B4	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
WCDMA B5	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
CDMA BC0	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
CDMA BC1	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
CDMA BC10	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B7	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B12/17	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B13	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B14	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B25/2	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.86	1.0	0.79	1.0
LTE B26/5	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B30	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B41/B38 PC3	0	2	63.30%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B41(HPUE) PC2	0	2	43.30%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B48	0	7	63.30%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B66/4	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B71	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n5	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n12	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n25/n2	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.77	1.0	0.77	1.0
5G FR1 n41 PC3	0	2	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n41 PC3	0	5	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.79	1.0	0.79	1.0
5G FR1 n41(HPUE) PC2	0	5	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.79	1.0	0.79	1.0
5G FR1 n66	0	2	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n71	0	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n77 PC3	0	7	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n77(HPUE) PC2	0	7	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n78 PC3	0	7	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
5G FR1 n78(HPUE) PC2	0	7	33.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0

Config 1													
Band	Config	Antenna	duty cycle	DSI 2		DSI 7		DSI 6		DSI 4		DSI 8	
				1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty	1g SAR design Target (W/kg)	Total uncertainty
GSM850(GPRS 4 Tx slots)	1	1	50.00%	1.02	0.7	0.847	0.7	0.847	0.7	1.02	0.7	0.847	0.7
GSM1900(GPRS 4 Tx slots)	1	0	50.00%	1.02	0.7	0.847	0.7	0.847	0.7	1.02	0.7	0.847	0.7
WCDMA B2	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
WCDMA B4	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
WCDMA B5	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
CDMA BC0	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
CDMA BC1	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
CDMA BC10	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B7	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B12	1	1	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B13	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B14	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B17	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B25/2	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B26/5	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B30	1	0	100.00%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B38 PC3	1	0	63.30%	0.907	1.2	0.755	1.2	0.755	1.2	0.907	1.2	0.755	1.2
LTE B41 PC3	1	0	63.30%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B41(HPUE) PC2	1	0	43.30%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B48	1	2	63.30%	0.95	1.0	0.79	1.0	0.79	1.0	0.95	1.0	0.79	1.0
LTE B66/4	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
LTE B71	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n5	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n12	1	1	100.00%	0.907	1.2	0.755	1.2	0.755	1.2	0.907	1.2	0.755	1.2
5G FR1 n25/n2	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n41	1	0	33.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n66	1	0	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n71	1	1	100.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n77 PC3	1	2	33.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n77(HPUE) PC2	1	2	33.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n78 PC3	1	2	33.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5
5G FR1 n78(HPUE) PC2	1	2	33.00%	0.848	1.5	0.708	1.5	0.708	1.5	0.848	1.5	0.708	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Plimit EFS settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Config	Antenna	TDD duty cycle	Head		Hotspot	Body-Worn/Extremity		P Max*
				Standalone DSI 2	Simultaneous DSI 7	Simultaneous DSI 6	Standalone DSI 4	Simultaneous DSI 8	
GSM850(GPRS 4 Tx slots)**	0	0	50.00%	33.00	32.20	32.00	32.80	32.00	29.50
GSM1900(GPRS 4 Tx slots)**	0	2	50.00%	33.20	32.40	27.40	28.60	27.80	27.00
WCDMA II	0	2	100.00%	32.10	31.30	24.10	25.00	24.20	25.70
WCDMA IV	0	2	100.00%	30.50	29.70	24.30	25.10	24.30	25.70
WCDMA V	0	0	100.00%	29.30	28.50	28.00	28.80	28.00	25.70
CDMA BC0	0	0	100.00%	29.60	28.80	28.10	29.00	28.20	25.50
CDMA BC1	0	2	100.00%	30.50	29.70	23.50	24.30	23.50	25.50
CDMA BC10	0	0	100.00%	29.80	29.00	28.20	29.10	28.30	25.50
LTE B7	0	2	100.00%	30.20	29.40	22.80	23.60	22.80	25.70
LTE B12/17	0	0	100.00%	31.90	31.10	27.70	28.50	27.70	25.70
LTE B13	0	0	100.00%	31.10	30.30	28.50	29.30	28.50	25.20
LTE B14	0	0	100.00%	30.80	30.00	28.80	29.60	28.80	25.70
LTE B25/2	0	2	100.00%	30.90	30.10	27.70	28.50	27.70	25.70
LTE B26/5	0	0	100.00%	29.60	28.80	23.00	23.80	23.40	25.70
LTE B30	0	2	100.00%	29.50	28.70	28.50	29.30	28.50	25.70
LTE B41/B38 PC3**	0	2	63.30%	32.60	31.80	24.70	25.60	24.80	24.20
LTE B41(HPUE) PC2**	0	2	43.30%	34.20	33.40	25.90	26.30	25.50	25.70
LTE B48**	0	7	63.30%	31.70	30.90	27.50	27.90	27.10	27.50
LTE B66/4	0	2	100.00%	30.50	29.70	23.10	23.90	23.10	25.70
LTE B71	0	0	100.00%	31.50	30.70	23.00	23.80	23.00	25.70
5G FR1 n5	0	0	100.00%	32.60	31.80	28.50	29.30	28.50	25.70
5G FR1 n12	0	0	100.00%	32.90	32.10	28.40	29.20	28.40	25.00
5G FR1 n25/n2	0	2	100.00%	31.00	30.20	27.40	29.10	28.30	24.70
5G FR1 n41 PC3**	0	2	33.00%	54.80	54.00	23.30	24.10	24.10	25.70
5G FR1 n41 PC3**	0	5	33.00%	29.90	29.10	33.80	34.60	33.80	25.70
5G FR1 n41(HPUE) PC2**	0	5	33.00%	29.90	29.10	33.80	34.60	33.80	27.50
5G FR1 n66	0	2	100.00%	30.40	29.60	24.90	25.80	25.80	27.50
5G FR1 n71	0	0	100.00%	31.60	30.80	24.10	24.90	24.10	25.70
5G FR1 n77 PC3**	0	7	33.00%	35.20	34.40	28.70	29.50	28.70	25.70
5G FR1 n77(HPUE) PC2**	0	7	33.00%	35.20	34.40	33.10	35.80	35.00	25.70
5G FR1 n78 PC3**	0	7	33.00%	31.60	30.80	33.10	35.80	35.00	26.50
5G FR1 n78(HPUE) PC2**	0	7	33.00%	31.60	30.80	26.50	27.30	26.50	25.00

Band	Config	Antenna	TDD duty cycle	Head		Hotspot	Body-Worn/Extremity		P Max*
				Standalone DSI 2	Simultaneous DSI 7	Simultaneous DSI 6	Standalone DSI 4	Simultaneous DSI 8	
GSM850(GPRS 4 Tx slots)**	1	1	50.00%	29.10	28.30	32.30	33.10	32.30	28.20
GSM1900(GPRS 4 Tx slots)**	1	0	50.00%	32.20	31.40	29.80	30.60	29.80	26.70
WCDMA II	1	0	100.00%	29.40	28.60	24.20	25.00	24.20	25.50
WCDMA IV	1	0	100.00%	26.20	25.40	24.00	24.80	24.00	25.50
WCDMA V	1	1	100.00%	26.40	25.60	28.10	28.80	28.10	25.00
CDMA BC0	1	1	100.00%	23.90	23.10	27.80	28.80	28.00	25.50
CDMA BC1	1	0	100.00%	27.00	26.30	24.00	25.20	24.40	25.50
CDMA BC10	1	1	100.00%	24.00	23.20	27.90	29.20	28.40	25.50
LTE B7	1	0	100.00%	31.90	31.10	24.70	25.50	24.70	25.50
LTE B12	1	1	100.00%	26.40	25.60	28.40	30.40	29.60	25.70
LTE B13	1	1	100.00%	26.00	25.20	28.60	29.40	28.60	25.00
LTE B14	1	1	100.00%	26.00	25.30	29.10	29.90	29.10	25.00
LTE B17	1	1	100.00%	25.60	24.80	28.40	29.20	28.40	25.00
LTE B25/2	1	0	100.00%	27.30	26.60	24.40	25.90	25.10	25.50
LTE B26/5	1	1	100.00%	25.30	24.50	27.90	28.60	27.90	25.00
LTE B30	1	0	100.00%	30.70	29.90	25.10	25.90	25.10	25.70
LTE B38 PC3**	1	0	63.30%	34.70	33.90	28.50	29.30	28.50	25.20
LTE B41 PC3**	1	0	63.30%	34.40	33.60	28.30	29.00	28.30	25.50
LTE B41(HPUE) PC2**	1	0	43.30%	36.00	35.20	29.90	30.60	29.90	27.00
LTE B48**	1	2	63.30%	40.30	39.50	25.00	25.80	25.00	25.70
LTE B66/4	1	0	100.00%	28.20	27.40	23.60	24.30	23.60	25.50
LTE B71	1	1	100.00%	26.90	26.10	29.60	30.40	29.60	25.00
5G FR1 n5	1	1	100.00%	25.80	25.00	28.50	29.30	28.50	25.00
5G FR1 n12	1	1	100.00%	26.20	25.40	28.50	30.40	29.60	23.00
5G FR1 n25/n2	1	0	100.00%	27.50	26.70	25.10	25.90	25.10	25.50
5G FR1 n41 PC3**	1	0	33.00%	38.50	37.70	33.50	36.00	35.20	25.50
5G FR1 n66	1	0	100.00%	26.30	25.50	24.10	24.80	24.10	25.50
5G FR1 n71	1	1	100.00%	27.20	26.40	29.50	31.10	30.30	25.00
5G FR1 n77 PC3**	1	2	33.00%	37.40	36.60	28.50	29.30	28.50	25.50
5G FR1 n77(HPUE) PC2**	1	2	33.00%	37.40	36.60	28.50	29.30	28.50	26.00
5G FR1 n78 PC3**	1	2	33.00%	53.70	52.90	26.40	27.20	26.40	25.50
5G FR1 n78(HPUE) PC2**	1	2	33.00%	53.70	52.90	26.40	27.20	26.40	26.00

*P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + 1dB uncertainty.

**All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

The max allowed output power is the P_{limit} + 1dB device uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.



4. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

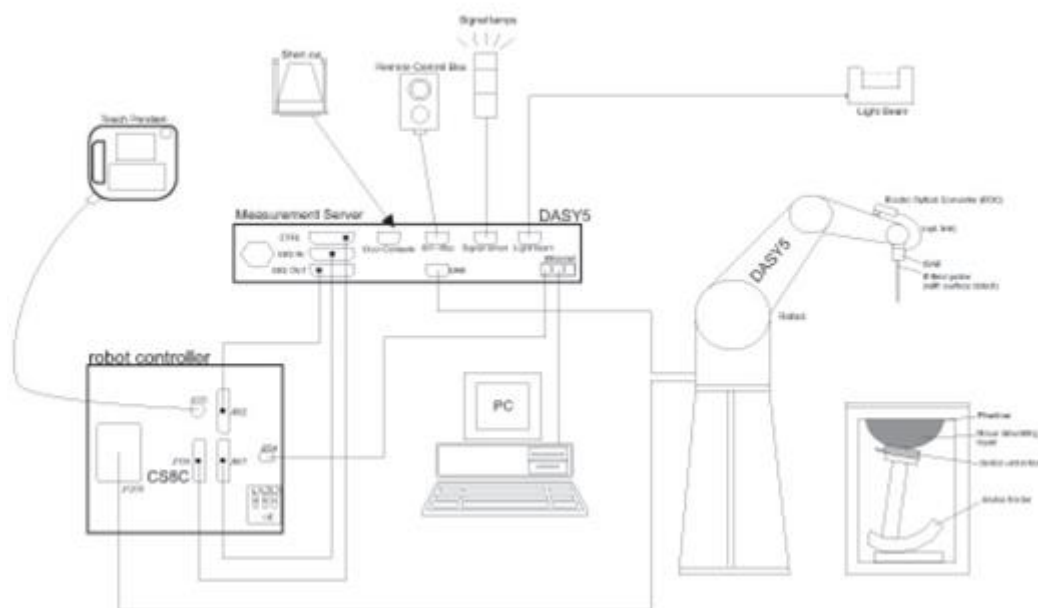The DASY system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 376) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory TW1190		Sporton International Inc. Wensan Laboratory TW3786	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan	
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.
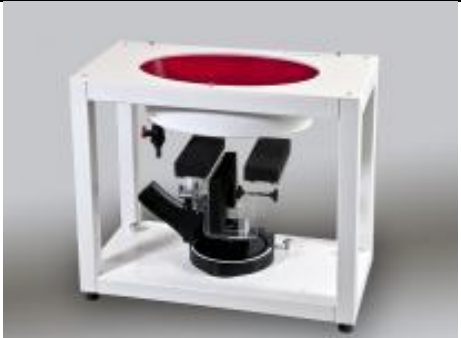
<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 05, 2021
SPEAG	2300MHz System Validation Kit ⁽²⁾	D2300V2	1006	Jan. 28, 2019	Jan. 26, 2021
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	736	Aug. 31, 2018	Aug. 28, 2021
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 29, 2019	Jan. 27, 2021
SPEAG	3700MHz System Validation Kit ⁽²⁾	D3700V2	1006	Mar. 05, 2019	Mar. 03, 2021
SPEAG	3900MHz System Validation Kit ⁽²⁾	D3900V2	1017	Apr. 29, 2019	Apr. 27, 2021
SPEAG	5GHz System Validation Kit ⁽²⁾	D5GHzV2	1006	Sep. 27, 2018	Sep. 24, 2021
SPEAG	Data Acquisition Electronics	DAE3	495	Jul. 21, 2020	Jul. 20, 2021
SPEAG	Data Acquisition Electronics	DAE4	699	Feb. 26, 2020	Feb. 25, 2021
SPEAG	Data Acquisition Electronics	DAE4	778	Jun. 04, 2020	Jun. 03, 2021
SPEAG	Data Acquisition Electronics	DAE4	913	May. 06, 2020	May. 05, 2021
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 18, 2020	Feb. 17, 2021
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 24, 2020	Jan. 23, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 23, 2020	Sep. 22, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 23, 2020	Sep. 22, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Feb. 04, 2020	Feb. 03, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Sep. 24, 2020	Sep. 23, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Oct. 22, 2020	Oct. 21, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.3	0.893	41.376	0.89	41.90	0.34	-1.25	± 5	2020/12/22
750	22.5	0.894	43.582	0.89	41.90	0.45	4.01	± 5	2020/12/24
750	22.2	0.885	42.251	0.89	41.90	-0.56	0.84	± 5	2020/12/27
750	22.4	0.893	41.547	0.89	41.90	0.34	-0.84	± 5	2020/12/29
750	22.6	0.903	41.845	0.89	41.90	1.46	-0.13	± 5	2020/12/31
750	22.9	0.907	41.719	0.89	41.90	1.91	-0.43	± 5	2021/1/3
750	22.7	0.901	41.618	0.89	41.90	1.24	-0.67	± 5	2021/1/8
750	22.3	0.894	42.598	0.89	41.90	0.45	1.67	± 5	2021/1/22
750	22.8	0.901	41.386	0.89	41.90	1.24	-1.23	± 5	2021/2/18
835	22.1	0.933	42.642	0.90	41.50	3.67	2.75	± 5	2020/12/21
835	22.6	0.873	42.480	0.90	41.50	-3.00	2.36	± 5	2020/12/23
835	22.5	0.896	41.854	0.90	41.50	-0.44	0.85	± 5	2020/12/25
835	22.6	0.904	41.500	0.90	41.50	0.44	0.00	± 5	2020/12/27
835	22.2	0.878	42.681	0.90	41.50	-2.44	2.85	± 5	2020/12/27
835	22.5	0.905	41.532	0.90	41.50	0.56	0.08	± 5	2020/12/28
835	22.2	0.937	42.764	0.90	41.50	4.11	3.05	± 5	2021/1/2
835	22.9	0.916	42.307	0.90	41.50	1.78	1.94	± 5	2021/1/3
835	22.7	0.875	42.044	0.90	41.50	-2.78	1.31	± 5	2021/1/8
835	22.7	0.905	41.931	0.90	41.50	0.56	1.04	± 5	2021/1/19
835	22.2	0.871	41.964	0.90	41.50	-3.22	1.12	± 5	2021/1/21
1750	22.5	1.356	41.380	1.37	40.10	-1.02	3.19	± 5	2020/12/25
1750	22.5	1.387	39.578	1.37	40.10	1.24	-1.30	± 5	2020/12/26
1750	22.2	1.378	39.712	1.37	40.10	0.58	-0.97	± 5	2020/12/29
1750	22.4	1.370	39.792	1.37	40.10	0.00	-0.77	± 5	2021/1/4
1750	22.3	1.378	40.822	1.37	40.10	0.58	1.80	± 5	2021/1/10
1750	22.3	1.363	40.890	1.37	40.10	-0.51	1.97	± 5	2021/1/17
1750	22.3	1.38	39.421	1.37	40.10	0.73	-1.69	± 5	2021/1/22
1750	22.5	1.377	41.596	1.37	40.10	0.51	3.73	± 5	2021/1/30
1900	22.5	1.434	40.207	1.40	40.00	2.43	0.52	± 5	2020/12/24
1900	22.5	1.430	40.802	1.40	40.00	2.14	2.01	± 5	2020/12/25
1900	22.6	1.431	39.474	1.40	40.00	2.21	-1.32	± 5	2020/12/28
1900	22.2	1.416	39.472	1.40	40.00	1.14	-1.32	± 5	2020/12/29
1900	22.4	1.425	39.552	1.40	40.00	1.79	-1.12	± 5	2021/1/4
1900	22.3	1.442	40.360	1.40	40.00	3.00	0.90	± 5	2021/1/10
1900	22.3	1.455	41.386	1.40	40.00	3.93	3.47	± 5	2021/1/15
1900	22.6	1.446	41.306	1.40	40.00	3.29	3.26	± 5	2021/1/16
1900	22.2	1.446	41.226	1.40	40.00	3.29	3.07	± 5	2021/1/21
2300	22.1	1.646	40.007	1.67	39.50	-1.44	1.28	± 5	2020/12/27
2300	22.4	1.666	40.377	1.67	39.50	-0.24	2.22	± 5	2021/1/5
2450	22.7	1.752	38.735	1.80	39.20	-2.67	-1.19	± 5	2021/1/18

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2600	22.1	2.011	37.829	1.96	39.00	2.60	-3.00	±5	2020/12/21
2600	22.5	1.999	38.281	1.96	39.00	1.99	-1.84	±5	2020/12/25
2600	22.3	1.926	38.745	1.96	39.00	-1.73	-0.65	±5	2020/12/26
2600	22.7	1.942	39.001	1.96	39.00	-0.92	0.00	±5	2020/12/30
2600	22.6	1.909	39.184	1.96	39.00	-2.60	0.47	±5	2020/12/31
2600	22.5	2.017	39.837	1.96	39.00	2.91	2.15	±5	2021/1/9
2600	22.5	1.951	39.497	1.96	39.00	-0.46	1.27	±5	2021/1/18
2600	22.2	1.902	38.563	1.96	39.00	-2.96	-1.12	±5	2021/1/21
3500	22.7	2.997	37.989	2.91	37.90	2.99	0.23	±5	2020/12/25
3500	22.4	2.981	37.823	2.91	37.90	2.44	-0.20	±5	2021/1/5
3500	22.7	3.055	37.720	2.91	37.90	4.98	-0.47	±5	2021/1/18
3700	22.7	3.211	37.787	3.12	37.70	2.92	0.23	±5	2020/12/25
3700	22.5	3.186	37.511	3.12	37.70	2.12	-0.50	±5	2020/12/28
3700	22.4	3.194	37.621	3.12	37.70	2.37	-0.21	±5	2021/1/5
3700	22.7	3.206	37.474	3.12	37.70	2.76	-0.60	±5	2021/1/18
3900	22.5	3.399	37.323	3.33	37.51	2.07	-0.50	±5	2020/12/28
3900	22.5	3.313	36.915	3.33	37.51	-0.51	-1.59	±5	2021/1/23
5250	22.3	4.581	36.963	4.71	35.95	-2.74	2.82	±5	2021/1/19
5600	22.7	4.964	34.093	5.07	35.50	-2.09	-3.96	±5	2021/1/20
5750	22.7	5.107	33.903	5.22	35.35	-2.16	-4.09	±5	2021/1/20
5750	22.4	5.1	35.542	5.22	35.35	-2.30	0.54	±5	2021/1/21

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/12/22	750	250	D750V3-1107	ES3DV3 - SN3270	DAE3 Sn495	2.04	8.32	8.16	-1.92
2020/12/24	750	250	D750V3-1107	ES3DV3 - SN3270	DAE3 Sn495	2.25	8.32	9	8.17
2020/12/27	750	250	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn699	2.22	8.32	8.88	6.73
2020/12/29	750	250	D750V3-1107	ES3DV3 - SN3184	DAE4 Sn1424	1.98	8.32	7.92	-4.81
2020/12/31	750	250	D750V3-1107	ES3DV3 - SN3184	DAE4 Sn1424	2.23	8.32	8.92	7.21
2021/1/3	750	250	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn699	2.20	8.32	8.8	5.77
2021/1/8	750	250	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn699	2.26	8.32	9.04	8.65
2021/1/22	750	250	D750V3-1107	ES3DV3 - SN3270	DAE3 Sn495	2.25	8.32	9	8.17
2021/2/18	750	250	D750V3-1107	EX3DV4 - SN3931	DAE4 Sn913	1.98	8.32	7.92	-4.81
2020/12/21	835	250	D835V2-4d167	EX3DV4 - SN3925	DAE4 Sn778	2.51	9.55	10.04	5.13
2020/12/23	835	250	D835V2-4d167	ES3DV3 - SN3270	DAE3 Sn495	2.32	9.55	9.28	-2.83
2020/12/25	835	250	D835V2-4d167	ES3DV3 - SN3270	DAE3 Sn495	2.38	9.55	9.52	-0.31
2020/12/27	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1424	2.26	9.55	9.04	-5.34
2020/12/27	835	250	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn699	2.28	9.55	9.12	-4.50
2020/12/28	835	250	D835V2-4d167	ES3DV3 - SN3270	DAE3 Sn495	2.40	9.55	9.6	0.52
2021/1/2	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1424	2.24	9.55	8.96	-6.18
2021/1/3	835	250	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn699	2.53	9.55	10.12	5.97
2021/1/8	835	250	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn699	2.29	9.55	9.16	-4.08
2021/1/19	835	50	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn699	0.493	9.55	9.86	3.25
2021/1/21	835	250	D835V2-4d167	EX3DV4 - SN3931	DAE4 Sn699	2.27	9.55	9.08	-4.92
2020/12/25	1750	250	D1750V2-1112	ES3DV3 - SN3270	DAE3 Sn495	8.31	36.70	33.24	-9.43
2020/12/26	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn1424	8.81	36.70	35.24	-3.98
2020/12/29	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn699	9.50	36.70	38	3.54
2021/1/4	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn699	9.55	36.70	38.2	4.09
2021/1/10	1750	250	D1750V2-1112	EX3DV4 - SN3931	DAE4 Sn699	9.60	36.70	38.4	4.63
2021/1/17	1750	250	D1750V2-1112	ES3DV3 - SN3270	DAE3 Sn495	8.85	36.70	35.4	-3.54
2021/1/22	1750	250	D1750V2-1112	ES3DV3 - SN3270	DAE3 Sn495	8.46	36.70	33.84	-7.79
2021/1/30	1750	250	D1750V2-1112	ES3DV3 - SN3270	DAE3 Sn495	8.94	36.70	35.76	-2.56
2020/12/24	1900	250	D1900V2-5d185	ES3DV3 - SN3270	DAE3 Sn495	9.71	39.40	38.84	-1.42
2020/12/25	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn1424	9.68	39.40	38.72	-1.73
2020/12/28	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn1424	9.69	39.40	38.76	-1.62
2020/12/29	1900	250	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn699	10.20	39.40	40.8	3.55
2021/1/4	1900	250	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn699	10.50	39.40	42	6.60
2021/1/10	1900	50	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn699	2.13	39.40	42.6	8.12
2021/1/15	1900	250	D1900V2-5d185	ES3DV3 - SN3270	DAE3 Sn495	9.85	39.40	39.4	0.00
2021/1/16	1900	250	D1900V2-5d185	ES3DV3 - SN3270	DAE3 Sn495	10.20	39.40	40.8	3.55
2021/1/21	1900	50	D1900V2-5d185	EX3DV4 - SN3931	DAE4 Sn699	2.11	39.40	42.2	7.11
2020/12/27	2300	250	D2300V2-1006	EX3DV4 - SN3728	DAE4 Sn1399	12.20	48.70	48.8	0.21
2021/1/5	2300	50	D2300V2-1006	EX3DV4 - SN3931	DAE4 Sn699	2.30	48.70	46	-5.54
2021/1/18	2450	250	D2450V2-736	EX3DV4 - SN3925	DAE4 Sn778	12.6	52.70	50.4	-4.36
2020/12/21	2600	250	D2600V2-1008	ES3DV3 - SN3270	DAE3 Sn495	14.40	56.40	57.6	2.13
2020/12/25	2600	250	D2600V2-1008	ES3DV3 - SN3270	DAE3 Sn495	14.30	56.40	57.2	1.42
2020/12/26	2600	50	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn699	2.84	56.40	56.8	0.71
2020/12/30	2600	50	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn699	2.86	56.40	57.2	1.42
2020/12/31	2600	250	D2600V2-1008	ES3DV3 - SN3184	DAE4 Sn1424	14.50	56.40	58	2.84
2021/1/9	2600	250	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn699	14.90	56.40	59.6	5.67
2021/1/18	2600	250	D2600V2-1008	ES3DV3 - SN3270	DAE3 Sn495	13.80	56.40	55.2	-2.13
2021/1/21	2600	50	D2600V2-1008	EX3DV4 - SN3931	DAE4 Sn699	2.80	56.40	56	-0.71

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/12/25	3500	100	D3500V2-1014	EX3DV4 - SN3931	DAE4 Sn699	6.97	67.90	69.7	2.65
2021/1/5	3500	50	D3500V2-1014	EX3DV4 - SN3931	DAE4 Sn699	3.56	67.90	71.2	4.86
2021/1/18	3500	50	D3500V2-1014	EX3DV4 - SN3931	DAE4 Sn699	3.65	67.90	73	7.51
2020/12/25	3700	100	D3700V2-1006	EX3DV4 - SN3931	DAE4 Sn699	7.10	67.30	71	5.50
2020/12/28	3700	50	D3700V2-1006	EX3DV4 - SN3931	DAE4 Sn699	3.41	67.30	68.2	1.34
2021/1/5	3700	50	D3700V2-1006	EX3DV4 - SN3931	DAE4 Sn699	3.42	67.30	68.4	1.63
2021/1/18	3700	100	D3700V2-1006	EX3DV4 - SN3931	DAE4 Sn699	6.64	67.30	66.4	-1.34
2020/12/28	3900	100	D3900V2-1017-3900	EX3DV4 - SN3931	DAE4 Sn699	7.10	69.50	71	2.16
2021/1/23	3900	100	D3900V2-1017-3900	EX3DV4 - SN3931	DAE4 Sn699	6.92	69.50	69.2	-0.43
2021/1/19	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN3925	DAE4 Sn778	7.95	80.70	79.5	-1.49
2021/1/20	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN3925	DAE4 Sn778	8.13	83.30	81.3	-2.40
2021/1/20	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3925	DAE4 Sn778	7.45	80.40	74.5	-7.34
2021/1/21	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN3925	DAE4 Sn778	7.67	80.40	76.7	-4.60

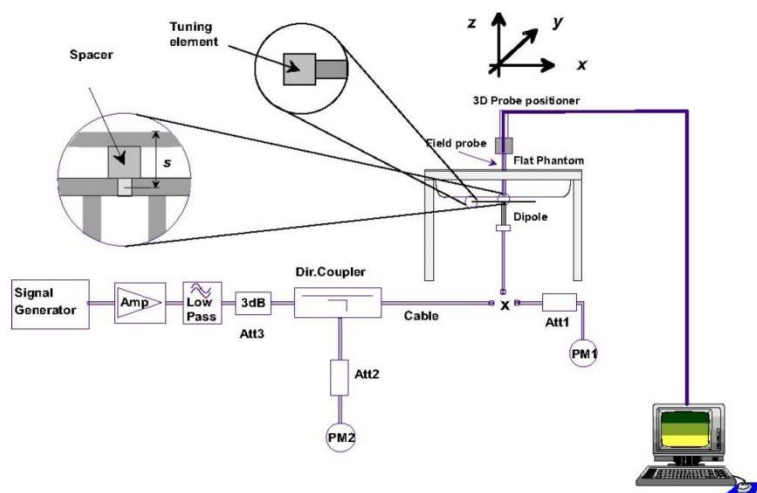

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

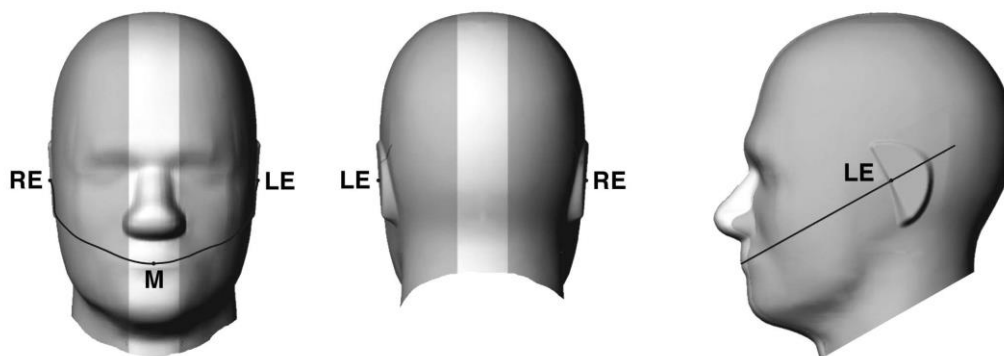


Fig 9.1.1 Front, back, and side views of SAM twin phantom

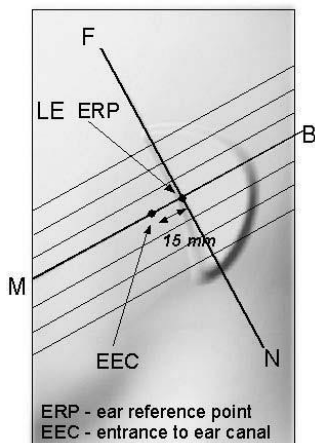


Fig 9.1.2 Close-up side view of phantom showing the ear region.

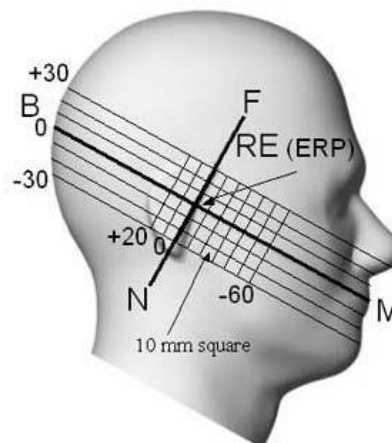


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

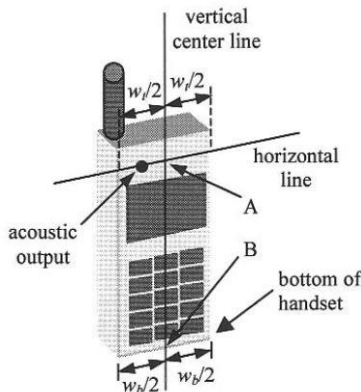


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

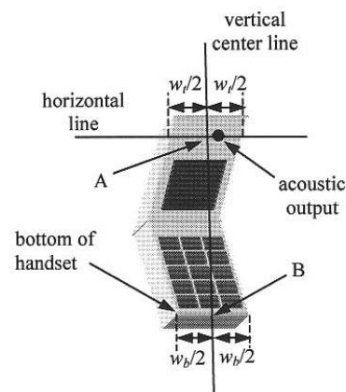


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

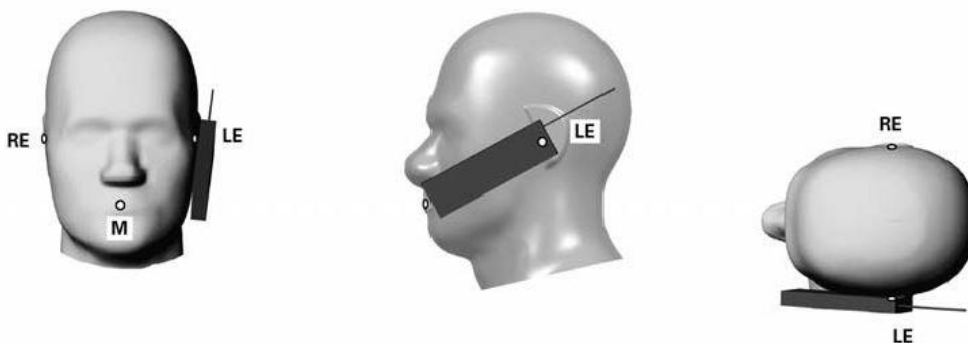


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

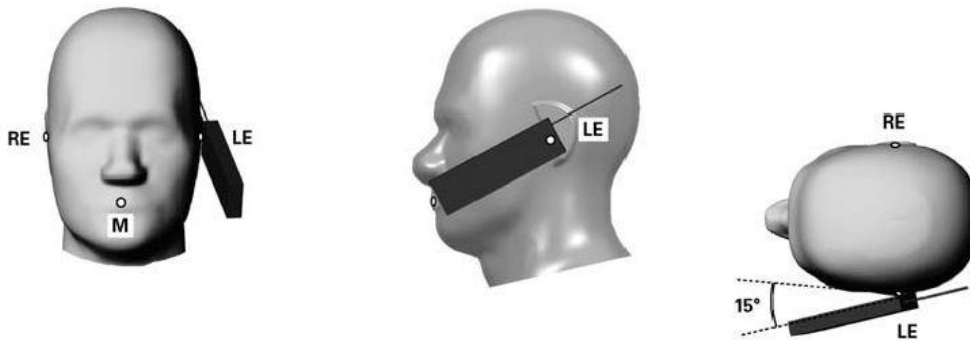


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

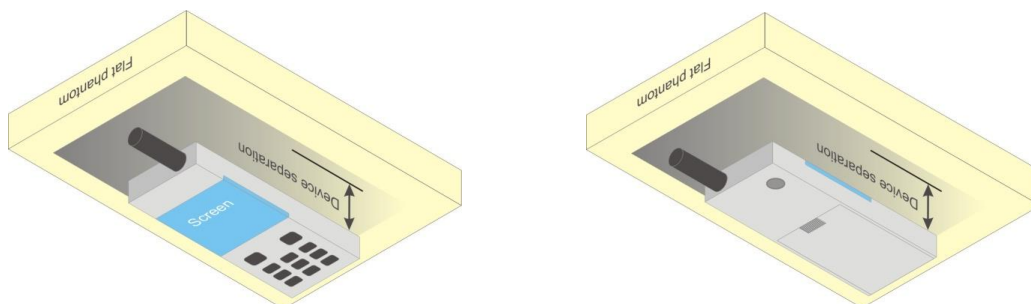


Fig 9.4 Body Worn Position

11.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Measurement procedure for output power and SAR

Power measurements for licensed transmitters are performed using a base station simulator under digital average power, and the detail output power measurement include in appendix D

<GSM Note>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

<WCDMA Note>

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.
3. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
4. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
5. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.
 Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12


Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

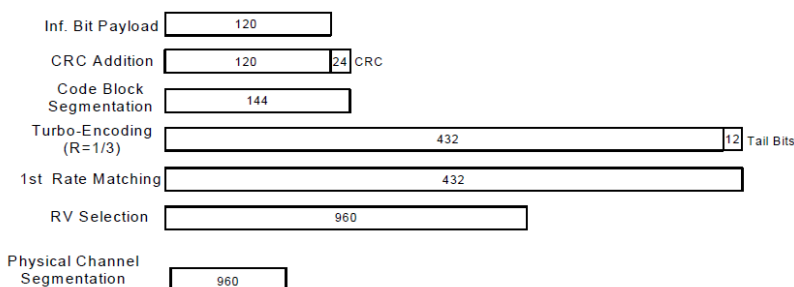
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration
<CDMA2000 Note>


1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

<LTE Note>

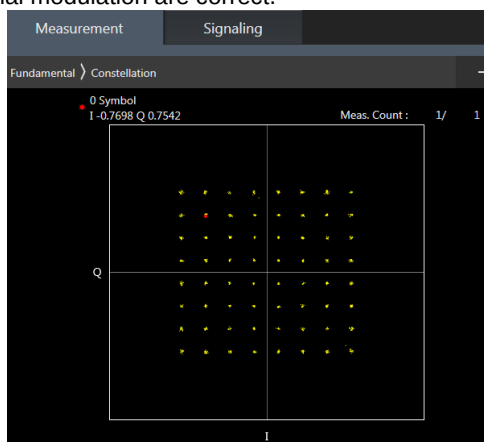1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM

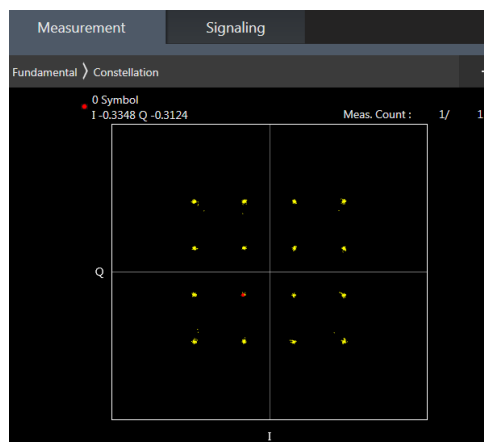

16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

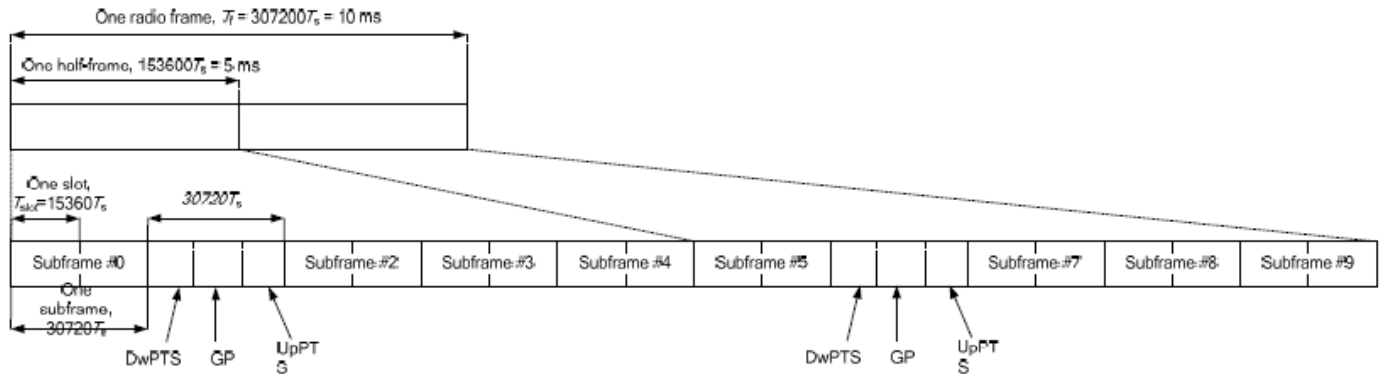


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- vi. The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- vii. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

<5G FR1 Note>

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM output power measurement reduction, full measurement on Pi/2 BPSK and QPSK, for 16QAM/64QAM/256QAM spot check 1RB 1offset configuration to ensure the output power will not ½ dB higher than Pi/2 BPSK and QPSK, for smaller bandwidth output power will spot check 1RB 1offset configuration at Pi/2 BPSK to ensure output power will not ½ dB higher than largest supported bandwidth.
 - b. The high order modulations for CP-OFDM maximum power according to tune-up document will not ½ dB higher than DFT-OFDM mode, also DFT-OFDM mode reported SAR is ≤ 1.45 W/kg for this device, for CP-OFDM mode output power and SAR measurement is not necessary.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for Pi/2 BPSK SAR testing follows 1RB Pi/2 BPSK allocation procedure
 - e. Pi/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
2. SAR testing for NR FDD was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.
3. SAR testing for NR TDD was performed using Factory Test Mode software to establish the connection, according to manufacturer definition for TDD actual transmission cycle is 33%, but factory test mode software is set and perform SAR with 25%, therefore, the SAR test result will be scaled up to 33%

<3GPP 38.101 MPR for EN-DC>
Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

<WLAN Note>

1. The WLAN output power include in appendix D was used for SAR testing.
2. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band or when MIMO mode was not performed, due to for each antenna, transmit power in SISO operation is larger than (or equal to) the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode. Additional output power measurements were not necessary.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<Bluetooth>

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 77.07% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation, for the duty cycle figure and output power include in appendix D.

**13. DL/UL carrier aggregation****<LTE Carrier Aggregation combinations>****General Note:**

1. This device supports Carrier Aggregation on downlink only for inter and intra band. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation				4CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	CA_2A-12A		3CC-1	1	CA_2A-12A-12A		4CC-1	1	CA_2A-12A-66A-66A		
2	CA_2A-13A		3CC-6	2	CA_2A-12A-30A		4CC-9	2	CA_2A-12A-66C		4CC-1
3	CA_2A-14A		3CC-8	3	CA_2A-12A-66A		4CC-2	3	CA_2A-13A-46C	B46 SCC Only	
4	CA_2A-17A			4	CA_2A-12B		4CC-1	4	CA_2A-13A-48C		
5	CA_2A-29A	B29 SCC Only	3CC-15	5	CA_2A-13A-46A	B46 SCC Only	4CC-3	5	CA_2A-13A-66A-66A		
6	CA_2A-2A		3CC-15	6	CA_2A-13A-48A		4CC-4	6	CA_2A-13A-66B		4CC-5
7	CA_2A-30A		3CC-10	7	CA_2A-13A-66A		4CC-5	7	CA_2A-13A-66C		4CC-5
8	CA_2A-46A	B46 SCC Only	3CC-41	8	CA_2A-14A-30A			8	CA_2A-14A-66A-66A		
9	CA_2A-48A		3CC-42	9	CA_2A-14A-66A		4CC-8	9	CA_2A-2A-12A-30A		
10	CA_2A-4A		3CC-34	10	CA_2A-29A-30A	B29 SCC Only	4CC-14	10	CA_2A-2A-12A-66A		4CC-1
11	CA_2A-5A		3CC-39	11	CA_2A-29A-66A	B29 SCC Only		11	CA_2A-2A-12B		4CC-9
12	CA_2A-66A		3CC-45	12	CA_2A-2A-12A		4CC-9	12	CA_2A-2A-13A-66A		4CC-5
13	CA_2A-71A		3CC-37	13	CA_2A-2A-13A		4CC-3	13	CA_2A-2A-14A-66A		4CC-8
14	CA_2A-7A		3CC-39	14	CA_2A-2A-14A		4CC-8	14	CA_2A-2A-29A-30A	B29 SCC Only	4CC-58
15	CA_2C		3CC-53	15	CA_2A-2A-29A	B29 SCC Only	4CC-14	15	CA_2A-2A-30A-66A		
16	CA_4A-12A		3CC-31	16	CA_2A-2A-30A		4CC-15	16	CA_2A-2A-46C	B46 SCC Only	4CC-133
17	CA_4A-13A		3CC-32	17	CA_2A-2A-46A	B46 SCC Only	4CC-16	17	CA_2A-2A-4A-12A		
18	CA_4A-17A			18	CA_2A-2A-4A		4CC-18	18	CA_2A-2A-4A-4A		4CC-19
19	CA_4A-29A	B29 SCC Only	3CC-33	19	CA_2A-2A-5A		4CC-20	19	CA_2A-2A-4A-5A		
20	CA_4A-30A		3CC-34	20	CA_2A-2A-7A		4CC-23	20	CA_2A-2A-5A-30A		
21	CA_4A-46A	B46 SCC Only	3CC-136	21	CA_2A-2A-66A		4CC-27	21	CA_2A-2A-5A-66A		
22	CA_4A-48A		3CC-138	22	CA_2A-2A-71A		4CC-25	22	CA_2A-2A-5B		4CC-19
23	CA_4A-4A		3CC-35	23	CA_2A-30A-66A		4CC-28	23	CA_2A-2A-7A-66A		
24	CA_4A-5A		3CC-36	24	CA_2A-46A-46A	B46 SCC Only	4CC-29	24	CA_2A-2A-66A-66A		4CC-21
25	CA_4A-71A		3CC-37	25	CA_2A-46A-48A	B46 SCC Only	4CC-49	25	CA_2A-2A-66A-71A		
26	CA_4A-7A		3CC-38	26	CA_2A-46A-66A	B46 SCC Only	4CC-30	26	CA_2A-2A-66B		4CC-21
27	CA_5A-5A		3CC-58	27	CA_2A-46C	B46 SCC Only	4CC-31	27	CA_2A-2A-66C		4CC-21
28	CA_5A-25A			28	CA_2A-48A-48A		4CC-34	28	CA_2A-30A-66A-66A		
29	CA_5A-30A		3CC-71	29	CA_2A-48A-66A		4CC-33	29	CA_2A-46A-46C	B46 SCC Only	4CC-30
30	CA_5A-38A			30	CA_2A-48C		4CC-33	30	CA_2A-46C-66A	B46 SCC Only	
31	CA_5A-41A			31	CA_2A-4A-12A		4CC-17	31	CA_2A-46D	B46 SCC Only	4CC-30
32	CA_5A-46A	B46 SCC Only	3CC-41	32	CA_2A-4A-13A			32	CA_2A-48A-48C		4CC-33
33	CA_5A-48A		3CC-42	33	CA_2A-4A-29A	B29 SCC Only		33	CA_2A-48C-66A		
34	CA_5A-66A		3CC-43	34	CA_2A-4A-30A			34	CA_2A-48D		4CC-133
35	CA_5A-7A		3CC-39	35	CA_2A-4A-4A		4CC-18	35	CA_2A-4A-12B		4CC-36
36	CA_5B		3CC-44	36	CA_2A-4A-5A		4CC-19	36	CA_2A-4A-4A-12A		
37	CA_7A-12A		3CC-49	37	CA_2A-4A-71A		4CC-125	37	CA_2A-4A-4A-5A		4CC-19
38	CA_7A-46A	B46 SCC Only	3CC-68	38	CA_2A-4A-7A		4CC-39	38	CA_2A-4A-5B		4CC-19
39	CA_7A-66A		3CC-129	39	CA_2A-5A-7A			39	CA_2A-4A-7A-7A		
40	CA_7A-7A		3CC-78	40	CA_2A-5A-30A		4CC-20	40	CA_2A-4A-7C		4CC-39
41	CA_7B		3CC-52	41	CA_2A-5A-46A	B46 SCC Only	4CC-41	41	CA_2A-5A-46C	B46 SCC Only	
42	CA_7C		3CC-52	42	CA_2A-5A-48A		4CC-42	42	CA_2A-5A-48C		
43	CA_12A-12A		3CC-1	43	CA_2A-5A-66A		4CC-21	43	CA_2A-5A-66A-66A		4CC-59



FCC SAR TEST REPORT

Report No. : FA001507-01A

44	CA_12A-25A			44	CA_2A-5B		4CC-19	44	CA_2A-5A-66B		4CC-59
45	CA_12A-30A		3CC-2	45	CA_2A-66A-66A		4CC-1	45	CA_2A-5A-66C		4CC-59
46	CA_12A-46A	B46 SCC Only	3CC-82	46	CA_2A-66A-71A		4CC-25	46	CA_2A-5B-30A		4CC-21
47	CA_12A-66A		3CC-83	47	CA_2A-66B		4CC-1	47	CA_2A-5B-66A		4CC-59
48	CA_12B		3CC-82	48	CA_2A-66C		4CC-1	48	CA_2A-66A-66A-66A		4CC-59
49	CA_13A-46A	B46 SCC Only	3CC-85	49	CA_2A-7A-12A		4CC-55	49	CA_2A-46A-48C	B46 SCC Only	
50	CA_13A-48A		3CC-87	50	CA_2A-7A-66A		4CC-56	50	CA_2A-66A-66A-71A		
51	CA_13A-66A		3CC-90	51	CA_2A-7A-7A		4CC-55	51	CA_2A-66A-66B		4CC-59
52	CA_14A-30A		3CC-93	52	CA_2A-7C		4CC-55	52	CA_2A-66A-66C		4CC-59
53	CA_14A-66A		3CC-93	53	CA_2C-12A		4CC-55	53	CA_2A-66C-71A		
54	CA_25A-25A		3CC-95	54	CA_2C-29A	B29 SCC Only	4CC-14	54	CA_2A-66D		4CC-59
55	CA_25A-26A		3CC-96	55	CA_2C-30A		4CC-9	55	CA_2A-7A-12B		
56	CA_25A-41A		3CC-98	56	CA_2C-5A		4CC-20	56	CA_2A-7A-66A-66A		4CC-23
57	CA_25A-46A	B46 SCC Only		57	CA_2C-66A		4CC-21	57	CA_2C-12A-30A		4CC-9
58	CA_26A-41A		3CC-99	58	CA_5A-5A-66A		4CC-43	58	CA_2C-29A-30A	B29 SCC Only	
59	CA_26A-46A	B46 SCC Only		59	CA_5A-30A-66A		4CC-70	59	CA_2C-5A-66A		4CC-21
60	CA_29A-30A	B29 SCC Only	3CC-100	60	CA_5A-46A-66A	B46 SCC Only	4CC-71	60	CA_2C-66A-66A		4CC-59
61	CA_29A-66A	B29 SCC Only	3CC-101	61	CA_5A-46C	B46 SCC Only	4CC-71	61	CA_4A-46A-46C	B46 SCC Only	
62	CA_30A-66A		3CC-102	62	CA_5A-48A-48A		4CC-74	62	CA_4A-46D	B46 SCC Only	4CC-61
63	CA_38C			63	CA_5A-48A-66A		4CC-74	63	CA_4A-48D		
64	CA_41A-41A		3CC-104	64	CA_5A-48C		4CC-74	64	CA_4A-4A-12A-30A		
65	CA_41C		3CC-104	65	CA_5A-66A-66A		4CC-74	65	CA_4A-4A-12B		4CC-64
66	CA_48A-48A		3CC-116	66	CA_5A-66B		4CC-74	66	CA_4A-4A-29A-30A	B29 SCC Only	
67	CA_48A-66A		3CC-131	67	CA_5A-66C		4CC-74	67	CA_4A-4A-5A-30A		
68	CA_48C		3CC-116	68	CA_5A-7A-46A	B46 SCC Only		68	CA_4A-4A-5B		4CC-67
69	CA_66A-66A		3CC-45	69	CA_5A-7A-7A		4CC-130	69	CA_4A-5B-30A		4CC-67
70	CA_66A-71A		3CC-46	70	CA_5A-7C		4CC-130	70	CA_5A-30A-66A-66A		
71	CA_66B		3CC-47	71	CA_5B-30A		4CC-20	71	CA_5A-46C-66A	B46 SCC Only	
72	CA_66C		3CC-48	72	CA_5B-46A	B46 SCC Only	4CC-41	72	CA_5A-46D	B46 SCC Only	4CC-71
73	CA_7A-13A		3CC-123	73	CA_5B-66A		4CC-47	73	CA_5A-48A-48C		4CC-74
74	CA_7A-26A		3CC-127	74	CA_7A-12A-66A			74	CA_5A-48C-66A		
75	CA_7A-29A	B29 SCC Only	3CC-124	75	CA_7A-12B		4CC-55	75	CA_5A-48D		4CC-74
76	CA_46A-66A	B46 SCC Only	3CC-26	76	CA_7A-46C	B46 SCC Only	4CC-129	76	CA_5A-5A-66A-66A		4CC-70
77	CA_46A-71A	B46 SCC Only	3CC-108	77	CA_7A-66A-66A		4CC-130	77	CA_5A-5A-66B		4CC-70
				78	CA_7A-7A-46A	B46 SCC Only	4CC-129	78	CA_5A-5A-66C		4CC-70
				79	CA_7C-46A	B46 SCC Only	4CC-129	79	CA_5A-66A-66B		4CC-70
				80	CA_12B-66A		4CC-137	80	CA_5A-66A-66C		4CC-70
				81	CA_12A-30A-66A		4CC-15	81	CA_5A-66D		4CC-70
				82	CA_12A-46C	B46 SCC Only	4CC-88	82	CA_5B-30A-66A		4CC-70
				83	CA_12A-66A-66A		4CC-89	83	CA_5B-66A-66A		4CC-70
				84	CA_12A-66C		4CC-89	84	CA_5B-46C	B46 SCC Only	
				85	CA_13A-46A-66A	B46 SCC Only	4CC-90	85	CA_5B-66B		4CC-70
				86	CA_13A-46C	B46 SCC Only	4CC-90	86	CA_5B-66C		4CC-70
				87	CA_13A-48A-48A		4CC-94	87	CA_12A-30A-66A-66A		
				88	CA_13A-48A-66A		4CC-94	88	CA_12A-46D	B46 SCC Only	
				89	CA_13A-48C		4CC-94	89	CA_12B-66A-66A		4CC-87
				90	CA_13A-66A-66A		4CC-92	90	CA_13A-46C-66A	B46 SCC Only	
				91	CA_13A-66B		4CC-93	91	CA_13A-46D	B46 SCC Only	4CC90
				92	CA_13A-66C		4CC-94	92	CA_13A-66A-66C		4CC-96
				93	CA_14A-30A-66A		4CC-101	93	CA_13A-48A-66B		4CC-96
				94	CA_14A-66A-66A		4CC-101	94	CA_13A-48A-66C		4CC-96
				95	CA_25A-25A-25A		4CC-102	95	CA_13A-48A-48C		4CC-96
				96	CA_25A-25A-26A			96	CA_13A-48C-66A		
				97	CA_25A-25A-41A		4CC-102	97	CA_13A-48D		4CC-96
				98	CA_25A-41C		4CC-102	98	CA_13A-66A-66A-66A		4CC-100
				99	CA_26A-41C			99	CA_13A-66A-66B		4CC-100



FCC SAR TEST REPORT

Report No. : FA001507-01A

				100	CA_29A-30A-66A	B29 SCC Only	4CC-104	100	CA_13A-66D		4CC-5
				101	CA_29A-66A-66A	B29 SCC Only	4CC-104	101	CA_14A-30A-66A-66A		
				102	CA_30A-66A-66A		4CC-104	102	CA_25A-25A-41C		4CC-103
				103	CA_41A-41C		4CC-105	103	CA_25A-41D		
				104	CA_41D		4CC-105	104	CA_29A-30A-66A-66A	B29 SCC Only	
				105	CA_46A-46A-66A	B46 SCC Only	4CC-109	105	CA_41A-41A-41C		4CC-103
				106	CA_46A-66A-66A	B46 SCC Only	4CC-109	106	CA_41A-41D		4CC-103
				107	CA_46C-66A	B46 SCC Only	4CC-109	107	CA_41C-41C		4CC-103
				108	CA_46C-71A	B46 SCC Only		108	CA_41E		4CC-103
				109	CA_46A-66C	B46 SCC Only	4CC-110	109	CA_46A-46C-66A	B46 SCC Only	4CC-30
				110	CA_48A-48A-66A		4CC-116	110	CA_46A-66A-66A-66A	B46 SCC Only	4CC-30
				111	CA_48A-48C		4CC-116	111	CA_46C-66A-66A	B46 SCC Only	4CC-30
				112	CA_48A-66A-66A		4CC-116	112	CA_46D-66A	B46 SCC Only	4CC-30
				113	CA_48A-66B		4CC-116	113	CA_48A-48A-66A-66A		4CC-33
				114	CA_48A-66C		4CC-116	114	CA_48A-66A-66A-66A		4CC-33
				115	CA_48C-66A		4CC-116	115	CA_48C-66B		4CC-33
				116	CA_48D		4CC-116	116	CA_48C-66C		4CC-33
				117	CA_66A-66A-66A		4CC-116	117	CA_48A-48A-66B		4CC-33
				118	CA_66A-66A-71A		4CC-25	118	CA_48A-48A-66C		4CC-33
				119	CA_66A-66B		4CC-52	119	CA_48A-48C-66A		4CC-33
				120	CA_66A-66C		4CC-52	120	CA_48A-48D		4CC-49
				121	CA_66C-71A		4CC-25	121	CA_48C-48C		4CC-49
				122	CA_66D		4CC-52	122	CA_48C-66A-66A		4CC-33
				123	CA_2A-7A-13A		4CC-128	123	CA_48D-66A		4CC-33
				124	CA_2A-7A-29A	B29 SCC Only	4CC-126	124	CA_48E		4CC-49
				125	CA_2A-7A-46A	B46 SCC Only	4CC-129	125	CA_2A-2A-4A-71A		
				126	CA_5A-7A-66A		4CC-130	126	CA_2A-7A-7A-29A	B29 SCC Only	
				127	CA_7A-7A-26A			127	CA_2A-7A-7A-66A		4CC-23
				128	CA_7A-7A-66A		4CC-127	128	CA_2A-7A-7A-13A		
				129	CA_7C-66A		4CC-127	129	CA_2A-7A-46C	B46 SCC Only	
				130	CA_7C-13A		4CC-128	130	CA_5A-7A-66A-66A		
				131	CA_46A-48A-66A	B46 SCC Only	4CC-132	131	CA_7A-7A-66A-66A		4CC-137
				132	CA_4A-12A-12A		4CC-36	132	CA_46C-48A-66A	B46 SCC Only	4CC-134
				133	CA_4A-12A-30A		4CC-64	133	CA_2A-46C-48A	B46 SCC Only	
				134	CA_4A-12B		4CC-64	134	CA_46A-48C-66A	B46 SCC Only	
				135	CA_4A-29A-30A	B29 SCC Only	4CC-66	135	CA_2A-7C-29A	B29 SCC Only	4CC-126
				136	CA_4A-46A-46A	B46 SCC Only	4CC-62	136	CA_5A-7C-66A		4CC-130
				137	CA_4A-46C	B46 SCC Only	4CC-62	137	CA_7A-12B-66A		4CC-1
				138	CA_4A-48C		4CC-63	138	CA_7A-46D	B46 SCC Only	4CC-129
				139	CA_4A-4A-12A		4CC-64	139	CA_7A-7A-46C	B46 SCC Only	4CC-129
				140	CA_4A-4A-13A		3CC-32	140	CA_7C-66A-66A		4CC-137
				141	CA_4A-4A-29A	B29 SCC Only	4CC-66	141	CA_7C-46C	B46 SCC Only	4CC-129
				142	CA_4A-4A-30A		4CC-66				
				143	CA_4A-4A-5A		4CC-19				
				144	CA_4A-4A-71A		4CC-125				
				145	CA_4A-4A-7A		4CC-39				
				146	CA_4A-5A-30A		4CC-67				
				147	CA_4A-5B		4CC-67				
				148	CA_4A-7A-12A						
				149	CA_4A-7A-7A		3CC-149				
				150	CA_4A-7C		3CC-149				

<Power verification when LTE Carrier Aggregation Active>
General Note:

- According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		CA Configuration (BCS)	PCC						SCC				Power		
			LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		CA_2A-17A	2	5	1907.5	19175	QPSK	1	12	17	10	740	5790	24.14	24.16
		CA_4A-17A	4	5	1752.5	20375	QPSK	1	0	17	10	740	5790	24.22	24.31
		CA_5A-25A	5	10	829	20450	QPSK	1	49	25	20	1960	8340	24.50	24.56
		CA_5A-38A	5	10	829	20450	QPSK	1	49	38	20	2595	38000	24.46	24.56
		CA_5A-41A	5	10	829	20450	QPSK	1	49	41	20	2593	40620	24.49	24.56
		CA_12A-25A	12	10	704	23060	QPSK	1	49	25	20	1960	8340	24.65	24.67
		CA_25A-46A	25	20	1905	26590	QPSK	1	0	46	20	5537.5	50665	24.14	24.23
		CA_26A-46A	26	15	821.5	26765	QPSK	1	0	46	20	5537.5	50665	24.51	24.58
Intra-Band	Contiguous	CA_38C	38	20	2580	37850	QPSK	1	49	38	20	2599.80	38048	24.64	24.69

<Three Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	CA_2A-14A-30A	2	20	1900	19100	QPSK	1	0	14	10	763	5330	30	10	2355	9820	24.15	24.24
	CA_2A-29A-66A	2	20	1900	19100	QPSK	1	0	29	10	722.5	9715	66	20	2155	66886	24.16	24.24
	CA_2A-4A-13A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	24.21	24.24
	CA_2A-4A-29A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	29	10	722.5	9715	24.14	24.24
	CA_2A-4A-30A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	30	10	2355	9820	24.16	24.24
	CA_2A-5A-7A	2	20	1900	19100	QPSK	1	0	5	10	881.5	2525	7	20	2655	3100	24.14	24.24
	CA_5A-7A-46A	5	10	829	20450	QPSK	1	49	7	20	2655	3100	46	20	5537.5	50665	24.48	24.56
	CA_7A-12A-66A	7	20	2535	21100	QPSK	1	99	12	10	737.5	5095	66	20	2155	66886	24.74	24.79
	CA_25A-25A-26A	25	20	1905	26590	QPSK	1	0	25	5	1932.5	8065	26	15	876.5	8865	24.17	24.23
	CA_26A-41C	26	15	821.5	26765	QPSK	1	0	41	20	2593	40620	41	20	2612.8	40818	24.56	24.58
	CA_46C-71A	71	20	673	133222	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	24.63	24.65
	CA_7A-7A-26A	7	20	2535	21100	QPSK	1	99	7	5	2687.5	3425	26	15	876.5	8865	24.70	24.79
	CA_4A-7A-12A	4	20	1745	20300	QPSK	1	0	7	20	2655	3100	12	10	737.5	5095	24.23	24.32



<Four Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC1				SCC2				SCC3				Power	
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	CA_2A-12A-66A-66A	2	20	1900	19100	QPSK	1	0	12	10	737.5	5095	66	20	2155	66886	66	5	2197.5	67311	24.14	24.24
	CA_2A-13A-46C	2	20	1900	19100	QPSK	1	0	13	10	751	5230	46	20	5537.5	50665	46	20	5557.3	50863	24.23	24.24
	CA_2A-13A-48C	2	20	1900	19100	QPSK	1	0	13	10	751	5230	48	20	3660	56340	48	20	3679.8	56538	24.17	24.24
	CA_2A-13A-66A-66A	2	20	1900	19100	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	5	2197.5	67311	24.24	24.24
	CA_2A-14A-66A-66A	2	20	1900	19100	QPSK	1	0	14	10	763	5330	66	20	2155	66886	66	5	2197.5	67311	24.15	24.24
	CA_2A-2A-12A-30A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	12	10	737.5	5095	30	10	2355	9820	24.20	24.24
	CA_2A-2A-30A-66A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	30	10	2355	9820	66	20	2155	66886	24.21	24.24
	CA_2A-2A-4A-12A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	4	20	2132.5	2175	12	10	737.5	5095	24.17	24.24
	CA_2A-2A-4A-5A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	4	20	2132.5	2175	5	10	881.5	2525	24.23	24.24
	CA_2A-2A-5A-30A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	5	10	881.5	2525	30	10	2355	9820	24.20	24.24
	CA_2A-2A-5A-66A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	5	10	881.5	2525	66	20	2155	66886	24.18	24.24
	CA_2A-2A-7A-66A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	7	20	2655	3100	66	20	2155	66886	24.19	24.24
	CA_2A-2A-66A-71A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	66	20	2155	66886	71	20	634.5	68761	24.16	24.24
	CA_2A-30A-66A-66A	2	20	1900	19100	QPSK	1	0	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	24.14	24.24
	CA_2A-46C-66A	2	20	1900	19100	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	66	20	2155	66886	24.24	24.24
	CA_2A-48C-66A	2	20	1900	19100	QPSK	1	0	48	20	3660	56340	48	20	3679.8	56538	66	20	2155	66886	24.23	24.24
	CA_2A-4A-4A-12A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	4	5	2152.5	2375	12	10	737.5	5095	24.15	24.24
	CA_2A-4A-7A-7A	2	20	1900	19100	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	5	2687.5	3425	24.24	24.24
	CA_2A-5A-46C	2	20	1900	19100	QPSK	1	0	5	10	881.5	2525	46	20	5537.5	50665	46	20	5557.3	50863	24.17	24.24
	CA_2A-5A-48C	2	20	1900	19100	QPSK	1	0	5	10	881.5	2525	48	20	3660	56340	48	20	3679.8	56538	24.17	24.24
	CA_2A-46A-48C	2	20	1900	19100	QPSK	1	0	46	20	5537.5	50665	48	20	3660	56340	48	20	3679.8	56538	24.15	24.24
	CA_2A-66A-66A-71A	2	20	1900	19100	QPSK	1	0	66	20	2155	66886	66	5	2197.5	67311	71	20	634.5	68761	24.21	24.24
	CA_2A-66C-71A	2	20	1900	19100	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	71	20	634.5	68761	24.15	24.24
	CA_2A-7A-12B	2	20	1900	19100	QPSK	1	0	7	20	2655	3100	12	10	740	5120	12	5	732.8	5048	24.19	24.24
	CA_2C-29A-30A	2	20	1900	19100	QPSK	1	0	2	20	1960.2	902	29	10	722.5	9715	30	10	2355	9820	24.21	24.24
	CA_4A-46A-46C	4	20	1745	20300	QPSK	1	0	46	20	5537.5	50665	46	20	5160	46890	46	20	5179.8	47088	24.26	24.32
	CA_4A-48D	4	20	1745	20300	QPSK	1	0	48	20	55340	3560	48	20	55359.8	3758	48	20	55379.6	3956	24.27	24.32
	CA_4A-4A-12A-30A	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	12	10	737.5	5095	30	10	2355	9820	24.24	24.32
	CA_4A-4A-29A-30A	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	29	10	722.5	9715	30	10	2355	9820	24.28	24.32
	CA_4A-4A-5A-30A	4	20	1745	20300	QPSK	1	0	4	5	2112.5	1975	5	10	881.5	2525	30	10	2355	9820	24.26	24.32
	CA_5A-30A-66A-66A	5	10	829	20450	QPSK	1	49	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	24.46	24.56
	CA_5A-46C-66A	5	10	829	20450	QPSK	1	49	46	20	5537.5	50665	46	20	5557.3	50863	66	20	2155	66886	24.54	24.56
	CA_5A-48C-66A	5	10	829	20450	QPSK	1	49	48	20	55340	3560	48	20	55359.8	3758	66	20	2155	66886	24.55	24.56
	CA_5B-46C	5	10	829	20450	QPSK	1	49	5	10	883.9	2549	46	20	5537.5	50665	46	20	5557.3	50863	24.53	24.56
	CA_12A-30A-66A-66A	12	10	704	23060	QPSK	1	49	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	24.65	24.67
	CA_12A-46D	12	10	704	23060	QPSK	1	49	46	20	5537.5	50665	46	20	5557.3	50863	46	20	5577.1	51061	24.59	24.67
	CA_13A-46C-66A	13	10	782	23230	QPSK	1	49	46	20	5537.5	50665	46	20	5557.3	50863	66	20	2155	66886	24.01	24.10
	CA_13A-48C-66A	13	10	782	23230	QPSK	1	49	48	20	55340	3560	48	20	55359.8	3758	66	20	2155	66886	24.06	24.10
	CA_14A-30A-66A-66A	14	10	793	23330	QPSK	1	0	30	10	2355	9820	66	20	2155	66886	66	5	2197.5	67311	24.55	24.59
	CA_25A-41D	25	20	1905	26590	QPSK	1	0	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	24.23	24.23
	CA_29A-30A-66A-66A	30	10	2310	27710	QPSK	1	0	29	10	722.5	9715	66	20	2155	66886	66	5	2197.5	67311	23.09	23.15
	CA_2A-2A-4A-71A	2	20	1900	19100	QPSK	1	0	2	5	1932.5	625	4	20	2132.5	2175	71	20	634.5	68761	24.14	24.24
	CA_2A-7A-7A-29A	2	20	1900	19100	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	29	10	722.5	9715	24.14	24.24
	CA_2A-7A-7A-13A	2	20	1900	19100	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	13	10	751	5230	24.21	24.24
	CA_2A-7A-46C	2	20	1900	19100	QPSK	1	0	7	20	2655	3100	46	20	5537.5	50665	46	20	5557.3	50863	24.19	24.24
	CA_5A-7A-66A-66A	5	10	829	20450	QPSK	1	49	7	20	2655	3100	66	20	2155	66886	66	5	2197.5	67311	24.53	24.56
	CA_2A-46C-48A	2	20	1900	19100	QPSK	1	0	46	20	5537.5	50665	46	20	5557.3	50863	48	20	55340	3560	24.17	24.24
	CA_46A-48C-66A	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	46	20	5537.5	50665	66	20	2155	66886	24.49	24.52

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	CA_5B
2	CA_41C

<Intra-band>
General Note:

- The device supports intra-band uplink carrier aggregation for LTE B5/B41 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Uplink CA is only operating with power class3, and additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

Config 0

CA_5B_DSI 0/2/4/6/7/8										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	49	0	0	2	0	25.18	25.7
20575	20476	QPSK	1	0	1	49	2	0	25.43	25.7
20600	20501	QPSK	1	0	1	49	2	0	25.33	25.7

CA_41C_DSI 0/2/4/6/7/8										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	99	1	0	2	0	24.57	25.7
40185	39987	QPSK	1	0	1	99	2	0	24.84	25.7
40620	40422	QPSK	1	0	1	99	2	0	24.85	25.7
41055	40857	QPSK	1	0	1	99	2	0	24.66	25.7
41490	41292	QPSK	1	0	1	99	2	0	25.05	25.7

CA_41C_HPUE_DSI 0/2/4/6/7/8										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	99	1	0	2	0	26.45	27.5
40185	39987	QPSK	1	0	1	99	2	0	26.66	27.5
40620	40422	QPSK	1	0	1	99	2	0	26.72	27.5
41055	40857	QPSK	1	0	1	99	2	0	26.48	27.5
41490	41292	QPSK	1	0	1	99	2	0	27.44	27.5

Config 1

CA_5B_DSI 0/2/4/6/7/8										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	49	1	0	2	0	24.22	25
20575	20476	QPSK	1	0	1	49	2	0	24.16	25
20600	20501	QPSK	1	0	1	49	2	0	24.34	25

CA_41C_DSI 0/2/4/6/7/8										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	99	1	0	2	0	24.45	25.5
40185	39987	QPSK	1	0	1	99	2	0	24.48	25.5
40620	40422	QPSK	1	0	1	99	2	0	24.53	25.5
41055	40857	QPSK	1	0	1	99	2	0	24.44	25.5
41490	41292	QPSK	1	0	1	99	2	0	24.76	25.5

CA_41C HPUE_DSI 0/2/4/6/7/8										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	99	1	0	2	0	26.28	27
40185	39987	QPSK	1	0	1	99	2	0	26.36	27
40620	40422	QPSK	1	0	1	99	2	0	26.32	27
41055	40857	QPSK	1	0	1	99	2	0	26.26	27
41490	41292	QPSK	1	0	1	99	2	0	26.98	27

14. RF Exposure position consideration

Distance of the Antenna to the EUT surface/edge						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 0	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Ant 1	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
WWAN Ant 2	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Ant 5	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WWAN Ant 7	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN Ant 3	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
2.4GHz WLAN/BT Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
5GHz WLAN Ant 3	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm
5GHz WLAN Ant 4	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Ant 0	Yes	Yes	No	Yes	Yes	Yes
WWAN Ant 1	Yes	Yes	Yes	No	Yes	Yes
WWAN Ant 2	Yes	Yes	No	Yes	Yes	Yes
WWAN Ant 5	Yes	Yes	No	Yes	Yes	Yes
WWAN Ant 7	Yes	Yes	No	Yes	Yes	Yes
2.4GHz WLAN Ant 3	Yes	Yes	Yes	No	Yes	Yes
2.4GHz WLAN/BT Ant 4	Yes	Yes	Yes	No	Yes	Yes
5GHz WLAN Ant 3	Yes	Yes	Yes	No	Yes	Yes
5GHz WLAN Ant 4	Yes	Yes	Yes	No	Yes	Yes

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
- The detail antenna location refers to operation description.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device the 5.5GHz WLAN back side product specific SAR is necessary.
6. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16 cm.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

CDMA Note:

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/5/17/38 SAR test was covered by Band 25/66/26/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - c. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5/n12/n41/n71/n77/n78 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
 - g. SAR testing for NR was performed using Factory Test Mode software to establish the connection, according to manufacturer definition for TDD actual transmission cycle is 33%, but factory test mode software is set and perform SAR with 25%, therefore, the SAR test result will be scaled up to 33%

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. When in MIMO SAR testing, if the hot spots are separated the scaling factor would scale each hot spot based on the difference between the power for that transmit antenna and the maximum rated power, if the hot spot were not separable or too much overlap which the scaling factor is the worst case rated power/measured power across the two chains in SAR calculation.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	189	836.4	28.00	29.50	1.413	0.05	0.196	0.277
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Tilted	0mm	DSI 2/7	189	836.4	28.00	29.50	1.413	-0.1	0.117	0.165
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	189	836.4	28.00	29.50	1.413	-0.18	0.241	0.340
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	128	824.2	27.77	29.50	1.489	0.09	0.238	0.354
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	251	848.8	27.60	29.50	1.549	-0.01	0.245	0.379
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Tilted	0mm	DSI 2/7	189	836.4	28.00	29.50	1.413	0.12	0.134	0.189
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	128	824.2	27.38	28.20	1.208	-0.13	0.651	0.786
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	189	836.4	27.27	28.20	1.239	-0.16	0.661	0.819
01	GSM850_Ant 1	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	251	848.8	27.36	28.20	1.213	-0.12	0.681	0.826
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Tilted	0mm	DSI 2/7	128	824.2	27.38	28.20	1.208	-0.1	0.467	0.564
	GSM850_Ant 1	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	128	824.2	27.38	28.20	1.208	-0.14	0.348	0.420
	GSM850_Ant 1	GPRS (4 Tx slots)	Left Tilted	0mm	DSI 2/7	128	824.2	27.38	28.20	1.208	-0.05	0.296	0.358
	GSM1900_Ant 2	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	810	1909.8	26.37	27.00	1.156	0.02	0.075	0.087
	GSM1900_Ant 2	GPRS (4 Tx slots)	Right Tilted	0mm	DSI 2/7	810	1909.8	26.37	27.00	1.156	-0.01	0.058	0.067
	GSM1900_Ant 2	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	810	1909.8	26.37	27.00	1.156	0.05	0.087	0.101
	GSM1900_Ant 2	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	512	1850.2	26.17	27.00	1.211	0	0.095	0.115
	GSM1900_Ant 2	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	661	1880	26.00	27.00	1.259	-0.08	0.111	0.140
	GSM1900_Ant 2	GPRS (4 Tx slots)	Left Tilted	0mm	DSI 2/7	810	1909.8	26.37	27.00	1.156	0.03	0.050	0.058
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Cheek	0mm	DSI 2/7	661	1880	25.84	26.70	1.219	0.01	0.072	0.088
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Tilted	0mm	DSI 2/7	661	1880	25.84	26.70	1.219	0.05	0.078	0.095
	GSM1900_Ant 0	GPRS (4Tx slots)	Left Cheek	0mm	DSI 2/7	661	1880	25.84	26.70	1.219	0.09	0.149	0.182
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	512	1850.2	25.51	26.70	1.315	-0.08	0.129	0.170
02	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Cheek	0mm	DSI 2/7	810	1909.8	25.63	26.70	1.279	-0.18	0.147	0.188
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Tilted	0mm	DSI 2/7	661	1880	25.84	26.70	1.219	-0.17	0.075	0.091

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	9538	1907.6	24.92	25.70	1.197	0.03	0.179	0.214
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	9538	1907.6	24.92	25.70	1.197	-0.05	0.133	0.159
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9538	1907.6	24.92	25.70	1.197	0.11	0.206	0.247
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9262	1852.4	24.59	25.70	1.291	-0.05	0.250	0.323
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9400	1880	24.77	25.70	1.239	0.15	0.233	0.289
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	9538	1907.6	24.92	25.70	1.197	-0.11	0.115	0.138
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	9538	1907.6	23.98	25.50	1.419	-0.14	0.123	0.180
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	9538	1907.6	23.98	25.50	1.419	0.04	0.105	0.149
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9538	1907.6	23.98	25.50	1.419	0.16	0.175	0.248
03	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9262	1852.4	23.75	25.50	1.496	-0.07	0.254	0.380
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	9400	1880	23.79	25.50	1.483	0.01	0.185	0.102
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	9538	1907.6	23.98	25.50	1.419	0.1	0.083	0.118
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	1413	1732.6	24.87	25.70	1.211	0.02	0.190	0.230
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	1413	1732.6	24.87	25.70	1.211	0.12	0.117	0.142
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1413	1732.6	24.87	25.70	1.211	0.05	0.226	0.274
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1312	1712.4	24.77	25.70	1.239	0.16	0.240	0.297
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1513	1752.6	24.81	25.70	1.227	0	0.230	0.282
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	1413	1732.6	24.87	25.70	1.211	-0.13	0.125	0.151
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	1413	1732.6	24.01	25.50	1.409	-0.02	0.212	0.299
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	1413	1732.6	24.01	25.50	1.409	0.04	0.189	0.266
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1413	1732.6	24.01	25.50	1.409	0.01	0.393	0.554
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1312	1712.4	23.89	25.50	1.449	-0.1	0.348	0.504
04	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	1513	1752.6	23.97	25.50	1.422	0.01	0.418	0.595
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	1413	1732.6	24.01	25.50	1.409	0.03	0.198	0.279
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	4182	836.4	25.17	25.70	1.130	0.05	0.209	0.236
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	4182	836.4	25.17	25.70	1.130	-0.14	0.131	0.148
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	4182	836.4	25.17	25.70	1.130	0.03	0.254	0.287
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	4132	826.4	24.08	25.70	1.452	0	0.266	0.386
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	4233	846.6	24.16	25.70	1.426	-0.06	0.270	0.385
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	4182	836.4	25.17	25.70	1.130	0.08	0.153	0.173
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	4182	836.4	23.62	25.00	1.374	-0.03	0.690	0.948
05	WCDMA V_Ant 1	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	4132	826.4	23.57	25.00	1.390	-0.09	0.696	0.967
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Cheek	0mm	DSI 2/7	4233	846.6	23.57	25.00	1.390	-0.07	0.637	0.885
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Tilted	0mm	DSI 2/7	4182	836.4	23.62	25.00	1.374	-0.09	0.505	0.694
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Cheek	0mm	DSI 2/7	4182	836.4	23.62	25.00	1.374	-0.04	0.424	0.583
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Tilted	0mm	DSI 2/7	4182	836.4	23.62	25.00	1.374	-0.04	0.266	0.365



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2/7	777	848.31	24.10	25.50	1.380	0.05	0.219	0.302
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2/7	777	848.31	24.10	25.50	1.380	-0.12	0.129	0.178
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	777	848.31	24.10	25.50	1.380	0.07	0.284	0.392
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	1013	824.7	24.09	25.50	1.384	-0.06	0.274	0.379
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	384	836.52	24.06	25.50	1.393	-0.09	0.288	0.401
	CDMA BC0_Ant 0	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2/7	777	848.31	24.10	25.50	1.380	-0.11	0.151	0.208
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 7	777	848.31	22.72	24.60	1.542	-0.06	0.572	0.882
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 7	1013	824.7	22.61	24.60	1.581	-0.03	0.616	0.974
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 7	384	836.52	22.67	24.60	1.560	0	0.577	0.900
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 7	777	848.31	22.72	24.60	1.542	-0.1	0.473	0.729
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Left Cheek	0mm	DSI 7	777	848.31	22.72	24.60	1.542	-0.05	0.341	0.526
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Left Tilted	0mm	DSI 7	777	848.31	22.72	24.60	1.542	-0.05	0.293	0.452
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2	777	848.31	23.49	25.40	1.552	-0.15	0.650	1.009
06	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2	1013	824.7	23.41	25.40	1.581	-0.05	0.712	1.126
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2	384	836.52	23.48	25.40	1.556	-0.02	0.670	1.042
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2	777	848.31	23.49	25.40	1.552	-0.07	0.577	0.896
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2	1013	824.7	23.41	25.40	1.581	-0.14	0.519	0.821
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2	384	836.52	23.48	25.40	1.556	-0.03	0.561	0.873
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2	777	848.31	23.49	25.40	1.552	-0.03	0.389	0.604
	CDMA BC0_Ant 1	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2	777	848.31	23.49	25.40	1.552	-0.06	0.341	0.529
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2/7	1175	1908.75	24.54	25.50	1.247	0.05	0.173	0.216
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2/7	1175	1908.75	24.54	25.50	1.247	0.03	0.128	0.160
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	1175	1908.75	24.54	25.50	1.247	-0.11	0.196	0.244
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	25	1851.25	24.09	25.50	1.384	-0.04	0.218	0.302
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	600	1880	24.31	25.50	1.315	-0.08	0.205	0.270
	CDMA BC1_Ant 2	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2/7	1175	1908.75	24.54	25.50	1.247	0.11	0.113	0.141
	CDMA BC1_Ant 0	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2/7	1175	1908.75	24.05	25.50	1.396	0.15	0.158	0.221
	CDMA BC1_Ant 0	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2/7	1175	1908.75	24.05	25.50	1.396	0.13	0.137	0.192
	CDMA BC1_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	1175	1908.75	24.05	25.50	1.396	-0.15	0.232	0.324
07	CDMA BC1_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	25	1851.25	23.59	25.50	1.552	-0.17	0.321	0.498
	CDMA BC1_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	600	1880	23.82	25.50	1.472	0.18	0.328	0.483
	CDMA BC1_Ant 0	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2/7	1175	1908.75	24.05	25.50	1.396	0.02	0.172	0.240
	CDMA BC10_Ant 0	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2/7	580	820.5	24.07	25.50	1.390	0.01	0.195	0.271
	CDMA BC10_Ant 0	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2/7	580	820.5	24.07	25.50	1.390	-0.01	0.119	0.165
	CDMA BC10_Ant 0	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2/7	580	820.5	24.07	25.50	1.390	-0.08	0.271	0.377
	CDMA BC10_Ant 0	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2/7	580	820.5	24.07	25.50	1.390	0.02	0.153	0.213
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 7	580	820.5	22.74	24.70	1.570	0.01	0.628	0.986
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 7	580	820.5	22.74	24.70	1.570	-0.06	0.508	0.798
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Left Cheek	0mm	DSI 7	580	820.5	22.74	24.70	1.570	-0.07	0.363	0.570
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Left Tilted	0mm	DSI 7	580	820.5	22.74	24.70	1.570	-0.05	0.317	0.498
08	CDMA BC10_Ant 1	1xRTT RC3 SO55	Right Cheek	0mm	DSI 2	580	820.5	23.69	25.50	1.517	-0.03	0.732	1.110
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Right Tilted	0mm	DSI 2	580	820.5	23.69	25.50	1.517	-0.06	0.634	0.962
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Left Cheek	0mm	DSI 2	580	820.5	23.69	25.50	1.517	-0.04	0.429	0.651
	CDMA BC10_Ant 1	1xRTT RC3 SO55	Left Tilted	0mm	DSI 2	580	820.5	23.69	25.50	1.517	-0.07	0.383	0.581



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 7_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	21100	2535	24.79	25.70	1.233	0.02	0.373	0.460
	LTE Band 7_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	20850	2510	24.71	25.70	1.256	0.18	0.413	0.519
	LTE Band 7_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	21350	2560	24.73	25.70	1.250	-0.15	0.331	0.414
	LTE Band 7_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	DSI 2/7	21100	2535	23.94	24.70	1.191	-0.11	0.300	0.357
	LTE Band 7_Ant 2	20M	QPSK	1	99	Right Tilted	0mm	DSI 2/7	21100	2535	24.79	25.70	1.233	-0.07	0.112	0.138
	LTE Band 7_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	DSI 2/7	21100	2535	23.94	24.70	1.191	0.02	0.095	0.113
	LTE Band 7_Ant 2	20M	QPSK	1	99	Left Cheek	0mm	DSI 2/7	21100	2535	24.79	25.70	1.233	0.03	0.277	0.342
	LTE Band 7_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	DSI 2/7	21100	2535	23.94	24.70	1.191	0	0.236	0.281
	LTE Band 7_Ant 2	20M	QPSK	1	99	Left Tilted	0mm	DSI 2/7	21100	2535	24.79	25.70	1.233	-0.1	0.157	0.194
	LTE Band 7_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	DSI 2/7	21100	2535	23.94	24.70	1.191	0.1	0.130	0.155
	LTE Band 7_Ant 0	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	21100	2535	24.06	25.50	1.393	0.08	0.063	0.088
	LTE Band 7_Ant 0	20M	QPSK	50	50	Right Cheek	0mm	DSI 2/7	21100	2535	23.16	24.50	1.361	0.11	0.052	0.071
	LTE Band 7_Ant 0	20M	QPSK	1	99	Right Tilted	0mm	DSI 2/7	21100	2535	24.06	25.50	1.393	0.03	0.049	0.068
	LTE Band 7_Ant 0	20M	QPSK	50	50	Right Tilted	0mm	DSI 2/7	21100	2535	23.16	24.50	1.361	-0.01	0.042	0.057
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Cheek	0mm	DSI 2/7	21100	2535	24.06	25.50	1.393	0.13	0.101	0.141
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Cheek	0mm	DSI 2/7	20850	2510	23.99	25.50	1.416	0.13	0.122	0.173
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Cheek	0mm	DSI 2/7	21350	2560	24.02	25.50	1.406	0.1	0.116	0.163
	LTE Band 7_Ant 0	20M	QPSK	50	50	Left Cheek	0mm	DSI 2/7	21100	2535	23.16	24.50	1.361	-0.05	0.089	0.121
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Tilted	0mm	DSI 2/7	21100	2535	24.06	25.50	1.393	0.14	0.04	0.056
	LTE Band 7_Ant 0	20M	QPSK	50	50	Left Tilted	0mm	DSI 2/7	21100	2535	23.16	24.50	1.361	0.08	0.035	0.048
	LTE Band 12_Ant 0	10M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	23095	707.5	24.63	25.70	1.279	0.03	0.179	0.229
	LTE Band 12_Ant 0	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23095	707.5	23.79	24.70	1.233	-0.13	0.147	0.181
	LTE Band 12_Ant 0	10M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	23095	707.5	24.63	25.70	1.279	-0.11	0.125	0.160
	LTE Band 12_Ant 0	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23095	707.5	23.79	24.70	1.233	-0.12	0.099	0.122
	LTE Band 12_Ant 0	10M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	23095	707.5	24.63	25.70	1.279	-0.09	0.256	0.328
	LTE Band 12_Ant 0	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23095	707.5	23.79	24.70	1.233	0.05	0.212	0.261
	LTE Band 12_Ant 0	10M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	23095	707.5	24.63	25.70	1.279	0.06	0.176	0.225
	LTE Band 12_Ant 0	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23095	707.5	23.79	24.70	1.233	-0.09	0.142	0.175
	LTE Band 12_Ant 1	10M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	23095	707.5	24.43	25.70	1.340	-0.1	0.612	0.820
	LTE Band 12_Ant 1	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23095	707.5	23.59	24.70	1.291	-0.06	0.499	0.644
10	LTE Band 12_Ant 1	10M	QPSK	50	0	Right Cheek	0mm	DSI 2/7	23095	707.5	23.53	24.70	1.309	0	0.485	0.635
	LTE Band 12_Ant 1	10M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	23095	707.5	24.43	25.70	1.340	-0.06	0.516	0.691
	LTE Band 12_Ant 1	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23095	707.5	23.59	24.70	1.291	-0.07	0.418	0.540
	LTE Band 12_Ant 1	10M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	23095	707.5	24.43	25.70	1.340	-0.04	0.304	0.407
	LTE Band 12_Ant 1	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23095	707.5	23.59	24.70	1.291	-0.02	0.261	0.337
	LTE Band 12_Ant 1	10M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	23095	707.5	24.43	25.70	1.340	-0.04	0.293	0.393
	LTE Band 12_Ant 1	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23095	707.5	23.59	24.70	1.291	-0.05	0.236	0.305
	LTE Band 12_Ant 1	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23095	707.5	23.59	24.70	1.291	-0.05	0.236	0.305



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13_Ant 0	10M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	23230	782	24.10	25.20	1.288	0.07	0.161	0.207
	LTE Band 13_Ant 0	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23230	782	23.19	24.20	1.262	-0.12	0.130	0.164
	LTE Band 13_Ant 0	10M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	23230	782	24.10	25.20	1.288	-0.18	0.095	0.122
	LTE Band 13_Ant 0	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23230	782	23.19	24.20	1.262	0.04	0.076	0.096
	LTE Band 13_Ant 0	10M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	23230	782	24.10	25.20	1.288	-0.03	0.229	0.295
	LTE Band 13_Ant 0	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23230	782	23.19	24.20	1.262	-0.14	0.190	0.240
	LTE Band 13_Ant 0	10M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	23230	782	24.10	25.20	1.288	0.05	0.146	0.188
	LTE Band 13_Ant 0	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23230	782	23.19	24.20	1.262	-0.01	0.121	0.153
11	LTE Band 13_Ant 1	10M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	23230	782	23.57	25.00	1.390	0.1	0.539	0.749
	LTE Band 13_Ant 1	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23230	782	22.65	24.00	1.365	-0.13	0.449	0.613
	LTE Band 13_Ant 1	10M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	23230	782	23.57	25.00	1.390	0.08	0.470	0.653
	LTE Band 13_Ant 1	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23230	782	22.65	24.00	1.365	-0.06	0.383	0.523
	LTE Band 13_Ant 1	10M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	23230	782	23.57	25.00	1.390	0.15	0.325	0.452
	LTE Band 13_Ant 1	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23230	782	22.65	24.00	1.365	-0.01	0.267	0.364
	LTE Band 13_Ant 1	10M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	23230	782	23.57	25.00	1.390	-0.07	0.288	0.400
	LTE Band 13_Ant 1	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23230	782	22.65	24.00	1.365	-0.08	0.231	0.315
	LTE Band 14_Ant 0	10M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	23330	793	24.59	25.70	1.291	0	0.149	0.192
	LTE Band 14_Ant 0	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23330	793	23.63	24.70	1.279	-0.13	0.133	0.170
	LTE Band 14_Ant 0	10M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	23330	793	24.59	25.70	1.291	0.05	0.093	0.120
	LTE Band 14_Ant 0	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23330	793	23.63	24.70	1.279	-0.18	0.073	0.093
	LTE Band 14_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	23330	782	24.59	25.70	1.291	0.02	0.243	0.314
	LTE Band 14_Ant 0	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23330	793	23.63	24.70	1.279	0.17	0.192	0.246
	LTE Band 14_Ant 0	10M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	23330	793	24.59	25.70	1.291	0.09	0.150	0.194
	LTE Band 14_Ant 0	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23330	793	23.63	24.70	1.279	-0.09	0.109	0.139
12	LTE Band 14_Ant 1	10M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	23330	793	23.66	25.00	1.361	-0.09	0.472	0.643
	LTE Band 14_Ant 1	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	23330	793	22.74	24.00	1.337	-0.07	0.421	0.563
	LTE Band 14_Ant 1	10M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	23330	793	23.66	25.00	1.361	-0.01	0.414	0.564
	LTE Band 14_Ant 1	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	23330	793	22.74	24.00	1.337	-0.07	0.362	0.484
	LTE Band 14_Ant 1	10M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	23330	793	23.66	25.00	1.361	0.02	0.283	0.385
	LTE Band 14_Ant 1	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	23330	793	22.74	24.00	1.337	0.03	0.247	0.330
	LTE Band 14_Ant 1	10M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	23330	793	23.66	25.00	1.361	-0.04	0.247	0.336
	LTE Band 14_Ant 1	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	23330	793	22.74	24.00	1.337	-0.07	0.288	0.385
	LTE Band 25_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	26590	1905	24.23	25.70	1.403	0.02	0.264	0.370
	LTE Band 25_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	26140	1860	24.11	25.70	1.442	-0.12	0.238	0.343
	LTE Band 25_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	26340	1880	24.19	25.70	1.416	-0.06	0.271	0.384
	LTE Band 25_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	DSI 2/7	26590	1905	23.40	24.70	1.349	0.03	0.221	0.298
	LTE Band 25_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	26590	1905	24.23	25.70	1.403	-0.14	0.142	0.199
	LTE Band 25_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	DSI 2/7	26590	1905	23.40	24.70	1.349	0.06	0.117	0.158
	LTE Band 25_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	26590	1905	24.23	25.70	1.403	-0.17	0.206	0.289
	LTE Band 25_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	DSI 2/7	26590	1905	23.40	24.70	1.349	-0.01	0.190	0.256
	LTE Band 25_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	26590	1905	24.23	25.70	1.403	0	0.124	0.174
	LTE Band 25_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	DSI 2/7	26590	1905	23.40	24.70	1.349	-0.12	0.106	0.143
	LTE Band 25_Ant 0	20M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	26590	1905	23.68	25.50	1.521	0.04	0.157	0.239
	LTE Band 25_Ant 0	20M	QPSK	50	24	Right Cheek	0mm	DSI 2/7	26590	1905	22.81	24.50	1.476	0.12	0.125	0.184
	LTE Band 25_Ant 0	20M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	26590	1905	23.68	25.50	1.521	-0.03	0.166	0.252
	LTE Band 25_Ant 0	20M	QPSK	50	24	Right Tilted	0mm	DSI 2/7	26590	1905	22.81	24.50	1.476	-0.1	0.131	0.193
	LTE Band 25_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	26590	1905	23.68	25.50	1.521	0.09	0.289	0.439
13	LTE Band 25_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	26140	1860	23.61	25.50	1.545	0.01	0.344	0.532
	LTE Band 25_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	26340	1880	23.61	25.50	1.545	0.15	0.313	0.484
	LTE Band 25_Ant 0	20M	QPSK	50	24	Left Cheek	0mm	DSI 2/7	26590	1905	22.81	24.50	1.476	0.07	0.225	0.332
	LTE Band 25_Ant 0	20M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	26590	1905	23.68	25.50	1.521	0.05	0.169	0.257
	LTE Band 25_Ant 0	20M	QPSK	50	24	Left Tilted	0mm	DSI 2/7	26590	1905	22.81	24.50	1.476	0.02	0.132	0.195



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	26865	831.5	24.49	25.70	1.321	0.01	0.178	0.235
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Cheek	0mm	DSI 2/7	26865	831.5	23.67	24.70	1.268	0.02	0.142	0.180
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	26865	831.5	24.49	25.70	1.321	-0.13	0.101	0.133
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Tilted	0mm	DSI 2/7	26865	831.5	23.67	24.70	1.268	0.05	0.080	0.101
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	26865	831.5	24.49	25.70	1.321	-0.01	0.254	0.336
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Cheek	0mm	DSI 2/7	26865	831.5	23.67	24.70	1.268	-0.16	0.196	0.248
	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	26865	831.5	24.49	25.70	1.321	0.08	0.134	0.177
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Tilted	0mm	DSI 2/7	26865	831.5	23.67	24.70	1.268	-0.07	0.108	0.137
	LTE Band 5B_Ant 0	10M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	20575	841.5	25.43	25.70	1.064	0.02	0.203	0.216
14	LTE Band 26_Ant 1	15M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	26865	831.5	23.49	25.00	1.416	-0.12	0.605	0.857
	LTE Band 26_Ant 1	15M	QPSK	36	0	Right Cheek	0mm	DSI 2/7	26865	831.5	22.64	24.00	1.368	-0.08	0.434	0.594
	LTE Band 26_Ant 1	15M	QPSK	75	0	Right Cheek	0mm	DSI 2/7	26865	831.5	22.64	24.00	1.368	-0.02	0.425	0.581
	LTE Band 26_Ant 1	15M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	26865	831.5	23.49	25.00	1.416	-0.07	0.460	0.651
	LTE Band 26_Ant 1	15M	QPSK	36	0	Right Tilted	0mm	DSI 2/7	26865	831.5	22.64	24.00	1.368	-0.07	0.373	0.510
	LTE Band 26_Ant 1	15M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	26865	831.5	23.49	25.00	1.416	-0.04	0.334	0.473
	LTE Band 26_Ant 1	15M	QPSK	36	0	Left Cheek	0mm	DSI 2/7	26865	831.5	22.64	24.00	1.368	-0.06	0.266	0.364
	LTE Band 26_Ant 1	15M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	26865	831.5	23.49	25.00	1.416	-0.04	0.284	0.402
	LTE Band 26_Ant 1	15M	QPSK	36	0	Left Tilted	0mm	DSI 2/7	26865	831.5	22.64	24.00	1.368	-0.01	0.225	0.308
	LTE Band 5B_Ant 1	10M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	20600	844	24.34	25.00	1.164	-0.09	0.573	0.667
	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	27710	2310	23.15	24.20	1.274	-0.04	0.177	0.225
	LTE Band 30_Ant 2	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	27710	2310	22.18	23.20	1.265	0.01	0.148	0.187
	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	27710	2310	23.15	24.20	1.274	-0.03	0.064	0.082
	LTE Band 30_Ant 2	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	27710	2310	22.18	23.20	1.265	0.02	0.053	0.067
	LTE Band 30_Ant 2	10M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	27710	2310	23.15	24.20	1.274	-0.05	0.118	0.150
	LTE Band 30_Ant 2	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	27710	2310	22.18	23.20	1.265	0.01	0.098	0.124
	LTE Band 30_Ant 2	10M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	27710	2310	23.15	24.20	1.274	0	0.092	0.117
	LTE Band 30_Ant 2	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	27710	2310	22.18	23.20	1.265	0.02	0.073	0.092
	LTE Band 30_Ant 0	10M	QPSK	1	25	Right Cheek	0mm	DSI 2/7	27710	2310	23.88	25.70	1.521	0.03	0.141	0.215
	LTE Band 30_Ant 0	10M	QPSK	25	25	Right Cheek	0mm	DSI 2/7	27710	2310	22.96	24.70	1.493	0.18	0.107	0.160
	LTE Band 30_Ant 0	10M	QPSK	1	25	Right Tilted	0mm	DSI 2/7	27710	2310	23.88	25.70	1.521	-0.16	0.094	0.143
	LTE Band 30_Ant 0	10M	QPSK	25	25	Right Tilted	0mm	DSI 2/7	27710	2310	22.96	24.70	1.493	-0.08	0.075	0.112
15	LTE Band 30_Ant 0	10M	QPSK	1	25	Left Cheek	0mm	DSI 2/7	27710	2310	23.88	25.70	1.521	-0.11	0.218	0.331
	LTE Band 30_Ant 0	10M	QPSK	25	25	Left Cheek	0mm	DSI 2/7	27710	2310	22.96	24.70	1.493	-0.12	0.167	0.249
	LTE Band 30_Ant 0	10M	QPSK	1	25	Left Tilted	0mm	DSI 2/7	27710	2310	23.88	25.70	1.521	0.07	0.098	0.149
	LTE Band 30_Ant 0	10M	QPSK	25	25	Left Tilted	0mm	DSI 2/7	27710	2310	22.96	24.70	1.493	0.15	0.077	0.115



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	132322	1745	24.32	25.70	1.374	0.04	0.201	0.276
	LTE Band 66_Ant 2	20M	QPSK	50	24	Right Cheek	0mm	DSI 2/7	132072	1720	23.38	24.70	1.355	0.02	0.167	0.226
	LTE Band 66_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	132322	1745	24.32	25.70	1.374	0.1	0.154	0.212
	LTE Band 66_Ant 2	20M	QPSK	50	24	Right Tilted	0mm	DSI 2/7	132072	1720	23.38	24.70	1.355	0	0.125	0.169
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132322	1745	24.32	25.70	1.374	0.13	0.277	0.381
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132072	1720	24.26	25.70	1.393	0.06	0.266	0.371
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132572	1770	24.25	25.70	1.396	-0.04	0.253	0.353
	LTE Band 66_Ant 2	20M	QPSK	50	24	Left Cheek	0mm	DSI 2/7	132072	1720	23.38	24.70	1.355	-0.02	0.231	0.313
	LTE Band 66_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	132322	1745	24.32	25.70	1.374	0.05	0.133	0.183
	LTE Band 66_Ant 2	20M	QPSK	50	24	Left Tilted	0mm	DSI 2/7	132072	1720	23.38	24.70	1.355	-0.06	0.103	0.140
	LTE Band 66_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	132322	1745	23.97	25.50	1.422	-0.03	0.163	0.232
	LTE Band 66_Ant 0	20M	QPSK	50	24	Right Cheek	0mm	DSI 2/7	132322	1745	22.99	24.50	1.416	-0.01	0.137	0.194
	LTE Band 66_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	132322	1745	23.97	25.50	1.422	-0.03	0.156	0.222
	LTE Band 66_Ant 0	20M	QPSK	50	24	Right Tilted	0mm	DSI 2/7	132322	1745	22.99	24.50	1.416	-0.06	0.135	0.191
	LTE Band 66_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132322	1745	23.97	25.50	1.422	-0.1	0.298	0.424
	LTE Band 66_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132072	1720	23.93	25.50	1.435	0.02	0.281	0.403
16	LTE Band 66_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	132572	1770	23.84	25.50	1.466	-0.06	0.332	0.487
	LTE Band 66_Ant 0	20M	QPSK	50	24	Left Cheek	0mm	DSI 2/7	132322	1745	22.99	24.50	1.416	0.04	0.252	0.357
	LTE Band 66_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	132322	1745	23.97	25.50	1.422	-0.03	0.156	0.222
	LTE Band 66_Ant 0	20M	QPSK	50	24	Left Tilted	0mm	DSI 2/7	132322	1745	22.99	24.50	1.416	-0.11	0.131	0.185
	LTE Band 71_Ant 0	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	133322	683	24.57	25.70	1.297	0.05	0.179	0.232
	LTE Band 71_Ant 0	20M	QPSK	50	0	Right Cheek	0mm	DSI 2/7	133322	683	23.66	24.70	1.271	-0.13	0.143	0.182
	LTE Band 71_Ant 0	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	133322	683	24.57	25.70	1.297	0.02	0.098	0.127
	LTE Band 71_Ant 0	20M	QPSK	50	0	Right Tilted	0mm	DSI 2/7	133322	683	23.66	24.70	1.271	-0.11	0.076	0.097
	LTE Band 71_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	133322	683	24.57	25.70	1.297	-0.18	0.211	0.274
	LTE Band 71_Ant 0	20M	QPSK	50	0	Left Cheek	0mm	DSI 2/7	133322	683	23.66	24.70	1.271	0.07	0.166	0.211
	LTE Band 71_Ant 0	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	133322	683	24.57	25.70	1.297	-0.1	0.125	0.162
	LTE Band 71_Ant 0	20M	QPSK	50	0	Left Tilted	0mm	DSI 2/7	133322	683	23.66	24.70	1.271	0	0.099	0.126
17	LTE Band 71_Ant 1	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	133322	683	23.49	25.00	1.416	-0.01	0.339	0.480
	LTE Band 71_Ant 1	20M	QPSK	50	0	Right Cheek	0mm	DSI 2/7	133322	683	22.58	24.00	1.387	0.03	0.294	0.408
	LTE Band 71_Ant 1	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	133322	683	23.49	25.00	1.416	-0.06	0.300	0.425
	LTE Band 71_Ant 1	20M	QPSK	50	0	Right Tilted	0mm	DSI 2/7	133322	683	22.58	24.00	1.387	-0.06	0.261	0.362
	LTE Band 71_Ant 1	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	133322	683	23.49	25.00	1.416	0.05	0.158	0.224
	LTE Band 71_Ant 1	20M	QPSK	50	0	Left Cheek	0mm	DSI 2/7	133322	683	22.58	24.00	1.387	-0.09	0.141	0.196
	LTE Band 71_Ant 1	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	133322	683	23.49	25.00	1.416	-0.07	0.150	0.212
	LTE Band 71_Ant 1	20M	QPSK	50	0	Left Tilted	0mm	DSI 2/7	133322	683	22.58	24.00	1.387	-0.12	0.133	0.184

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	41055	2636.5	24.83	25.70	1.222	62.9	1.006	0.06	0.216	0.265
	LTE Band 41_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	39750	2506	24.76	25.70	1.242	62.9	1.006	0.07	0.243	0.304
18	LTE Band 41_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	40185	2549.5	24.82	25.70	1.225	62.9	1.006	0.13	0.251	0.309
	LTE Band 41_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	40620	2593	24.75	25.70	1.245	62.9	1.006	0.11	0.203	0.254
	LTE Band 41_Ant 2	20M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	41490	2680	24.68	25.70	1.265	62.9	1.006	0.08	0.210	0.267
	LTE Band 41_Ant 2	20M	QPSK	50	50	Right Cheek	0mm	DSI 2/7	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.1	0.203	0.242
	LTE Band 41_Ant 2	20M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.01	0.074	0.091
	LTE Band 41_Ant 2	20M	QPSK	50	50	Right Tilted	0mm	DSI 2/7	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.09	0.061	0.073
	LTE Band 41_Ant 2	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	41055	2636.5	24.83	25.70	1.222	62.9	1.006	0	0.164	0.202
	LTE Band 41_Ant 2	20M	QPSK	50	50	Left Cheek	0mm	DSI 2/7	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.05	0.153	0.182
	LTE Band 41_Ant 2	20M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	41055	2636.5	24.83	25.70	1.222	62.9	1.006	0.11	0.157	0.193
	LTE Band 41_Ant 2	20M	QPSK	50	50	Left Tilted	0mm	DSI 2/7	40185	2549.5	23.97	24.70	1.183	62.9	1.006	0.12	0.105	0.125
	LTE Band 41C_HPUE_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	41490	2680	25.05	25.70	1.161	62.9	1.006	0.01	0.196	0.229
	LTE Band 41_HPUE_Ant 2	20M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	41055	2636.5	26.54	27.50	1.247	42.9	1.009	-0.03	0.233	0.293
	LTE Band 41C_HPUE_Ant 2	20M	QPSK	1	99	Right Cheek	0mm	DSI 2/7	41490	2680	27.44	27.50	1.014	42.9	1.009	0	0.235	0.240
	LTE Band 41_Ant 0	20M	QPSK	1	49	Right Cheek	0mm	DSI 2/7	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.04	0.031	0.043
	LTE Band 41_Ant 0	20M	QPSK	50	24	Right Cheek	0mm	DSI 2/7	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.01	0.029	0.039
	LTE Band 41_Ant 0	20M	QPSK	1	49	Right Tilted	0mm	DSI 2/7	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.10	0.021	0.029
	LTE Band 41_Ant 0	20M	QPSK	50	24	Right Tilted	0mm	DSI 2/7	40185	2549.5	23.19	24.50	1.352	62.9	1.006	0.15	0.017	0.023
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.14	0.056	0.078
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	39750	2506	23.99	25.50	1.416	62.9	1.006	-0.1	0.078	0.111
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	40185	2549.5	24.01	25.50	1.409	62.9	1.006	-0.18	0.066	0.094
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	40620	2593	23.84	25.50	1.466	62.9	1.006	-0.08	0.067	0.099
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	41490	2680	24.02	25.50	1.406	62.9	1.006	0.02	0.075	0.106
	LTE Band 41_Ant 0	20M	QPSK	50	24	Left Cheek	0mm	DSI 2/7	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.16	0.052	0.071
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Tilted	0mm	DSI 2/7	41055	2636.5	24.09	25.50	1.384	62.9	1.006	0.18	0.014	0.019
	LTE Band 41_Ant 0	20M	QPSK	50	24	Left Tilted	0mm	DSI 2/7	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.12	0.012	0.016
	LTE Band 41C_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	41490	2680	24.76	25.50	1.186	62.9	1.006	-0.03	0.064	0.076
	LTE Band 41_HPUE_Ant 0	20M	QPSK	1	49	Left Cheek	0mm	DSI 2/7	41055	2636.5	25.87	27.00	1.297	42.9	1.009	-0.07	0.080	0.105
	LTE Band 41C_HPUE_Ant 0	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	41490	2680	26.98	27.00	1.005	42.9	1.009	-0.05	0.086	0.087
	LTE Band 48_Ant 7	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	56150	3641	24.52	25.70	1.312	62.9	1.006	0.06	0.175	0.231
	LTE Band 48_Ant 7	20M	QPSK	50	0	Right Cheek	0mm	DSI 2/7	56150	3641	23.53	24.70	1.309	62.9	1.006	0.04	0.137	0.180
	LTE Band 48_Ant 7	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	56150	3641	24.52	25.70	1.312	62.9	1.006	-0.08	0.194	0.256
	LTE Band 48_Ant 7	20M	QPSK	50	0	Right Tilted	0mm	DSI 2/7	56150	3641	23.53	24.70	1.309	62.9	1.006	0.09	0.164	0.216
	LTE Band 48_Ant 7	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	56150	3641	24.52	25.70	1.312	62.9	1.006	0.01	0.284	0.375
	LTE Band 48_Ant 7	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	55340	3560	24.12	25.70	1.439	62.9	1.006	0.04	0.181	0.262
	LTE Band 48_Ant 7	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	55830	3609	24.37	25.70	1.358	62.9	1.006	-0.11	0.231	0.316
19	LTE Band 48_Ant 7	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	56640	3690	24.44	25.70	1.337	62.9	1.006	-0.1	0.350	0.471
	LTE Band 48_Ant 7	20M	QPSK	50	0	Left Cheek	0mm	DSI 2/7	56150	3641	23.53	24.70	1.309	62.9	1.006	0.08	0.231	0.304
	LTE Band 48_Ant 7	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	56150	3641	24.52	25.70	1.312	62.9	1.006	-0.06	0.123	0.162
	LTE Band 48_Ant 7	20M	QPSK	50	0	Left Tilted	0mm	DSI 2/7	56150	3641	23.53	24.70	1.309	62.9	1.006	0.07	0.102	0.134
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	56640	3690	24.65	25.70	1.274	62.9	1.006	0.04	0.044	0.056
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	55340	3560	24.39	25.70	1.352	62.9	1.006	0.04	0.024	0.033
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	55830	3609	24.55	25.70	1.303	62.9	1.006	0.01	0.026	0.034
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Cheek	0mm	DSI 2/7	56150	3641	24.62	25.70	1.282	62.9	1.006	0.09	0.047	0.061
	LTE Band 48_Ant 2	20M	QPSK	50	24	Right Cheek	0mm	DSI 2/7	56640	3690	23.65	24.70	1.274	62.9	1.006	-0.03	0.026	0.033
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Tilted	0mm	DSI 2/7	56640	3690	24.65	25.70	1.274	62.9	1.006	0.07	0.021	0.027
	LTE Band 48_Ant 2	20M	QPSK	50	24	Right Tilted	0mm	DSI 2/7	56640	3690	23.65	24.70	1.274	62.9	1.006	-0.01	0.029	0.037
	LTE Band 48_Ant 2	20M	QPSK	1	0	Left Cheek	0mm	DSI 2/7	56640	3690	24.65	25.70	1.274	62.9	1.006	-0.04	0.021	0.027
	LTE Band 48_Ant 2	20M	QPSK	50	24	Left Cheek	0mm	DSI 2/7	56640	3690	23.65	24.70	1.274	62.9	1.006	-0.03	0.015	0.019
	LTE Band 48_Ant 2	20M	QPSK	1	0	Left Tilted	0mm	DSI 2/7	56640	3690	24.65	25.70	1.274	62.9	1.006	-0.1	0.005	0.006
	LTE Band 48_Ant 2	20M	QPSK	50	24	Left Tilted	0mm	DSI 2/7	56640	3690	23.65	24.70	1.274	62.9	1.006	-0.02	0.002	0.003

**<5G NR SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 0	20M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	167300	836.5	24.24	25.00	1.191	0.01	0.091	0.108
	FR1 n5_Ant 0	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	167300	836.5	24.09	25.00	1.233	-0.06	0.101	0.125
	FR1 n5_Ant 0	20M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	167300	836.5	24.24	25.00	1.191	0.05	0.056	0.067
	FR1 n5_Ant 0	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	167300	836.5	24.09	25.00	1.233	0.09	0.061	0.075
	FR1 n5_Ant 0	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	167300	836.5	24.24	25.00	1.191	-0.09	0.147	0.175
	FR1 n5_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	167300	836.5	24.09	25.00	1.233	-0.03	0.147	0.181
	FR1 n5_Ant 0	20M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	167300	836.5	24.24	25.00	1.191	-0.08	0.074	0.088
	FR1 n5_Ant 0	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	167300	836.5	24.09	25.00	1.233	-0.04	0.075	0.092
20	FR1 n5_Ant 1	20M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	167300	836.5	23.51	25.00	1.409	-0.07	0.593	0.836
	FR1 n5_Ant 1	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	167300	836.5	23.30	25.00	1.479	0.06	0.553	0.818
	FR1 n5_Ant 1	20M	BPSK	100	0	Right Cheek	0mm	DSI 2/7	167300	836.5	22.77	24.50	1.489	0.1	0.496	0.739
	FR1 n5_Ant 1	20M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	167300	836.5	23.51	25.00	1.409	0.08	0.483	0.681
	FR1 n5_Ant 1	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	167300	836.5	23.30	25.00	1.479	0.06	0.455	0.673
	FR1 n5_Ant 1	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	167300	836.5	23.51	25.00	1.409	-0.02	0.352	0.496
	FR1 n5_Ant 1	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	167300	836.5	23.30	25.00	1.479	0.08	0.374	0.553
	FR1 n5_Ant 1	20M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	167300	836.5	23.51	25.00	1.409	0.01	0.367	0.517
	FR1 n5_Ant 1	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	167300	836.5	23.30	25.00	1.479	0.02	0.339	0.501
	FR1 n12_Ant 0	15M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	141500	707.5	23.91	24.70	1.199	0.03	0.054	0.065
	FR1 n12_Ant 0	15M	BPSK	36	22	Right Cheek	0mm	DSI 2/7	141500	707.5	23.67	24.70	1.268	0.15	0.062	0.079
	FR1 n12_Ant 0	15M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	141500	707.5	23.91	24.70	1.199	0.07	0.007	0.008
	FR1 n12_Ant 0	15M	BPSK	36	22	Right Tilted	0mm	DSI 2/7	141500	707.5	23.67	24.70	1.268	0.08	0.009	0.011
	FR1 n12_Ant 0	15M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	141500	707.5	23.91	24.70	1.199	0.17	0.068	0.082
	FR1 n12_Ant 0	15M	BPSK	36	22	Left Cheek	0mm	DSI 2/7	141500	707.5	23.67	24.70	1.268	0.07	0.073	0.093
	FR1 n12_Ant 0	15M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	141500	707.5	23.91	24.70	1.199	0.14	0.011	0.013
	FR1 n12_Ant 0	15M	BPSK	36	22	Left Tilted	0mm	DSI 2/7	141500	707.5	23.67	24.70	1.268	0.05	0.008	0.010
21	FR1 n12_Ant 1	15M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	141500	707.5	22.16	23.00	1.213	-0.18	0.406	0.493
	FR1 n12_Ant 1	15M	BPSK	36	0	Right Cheek	0mm	DSI 2/7	141500	707.5	22.07	23.00	1.239	-0.07	0.384	0.476
	FR1 n12_Ant 1	15M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	141500	707.5	22.16	23.00	1.213	-0.13	0.342	0.415
	FR1 n12_Ant 1	15M	BPSK	36	0	Right Tilted	0mm	DSI 2/7	141500	707.5	22.07	23.00	1.239	-0.19	0.315	0.390
	FR1 n12_Ant 1	15M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	141500	707.5	22.16	23.00	1.213	-0.18	0.167	0.203
	FR1 n12_Ant 1	15M	BPSK	36	0	Left Cheek	0mm	DSI 2/7	141500	707.5	22.07	23.00	1.239	-0.09	0.161	0.199
	FR1 n12_Ant 1	15M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	141500	707.5	22.16	23.00	1.213	-0.1	0.138	0.167
	FR1 n12_Ant 1	15M	BPSK	36	0	Left Tilted	0mm	DSI 2/7	141500	707.5	22.07	23.00	1.239	-0.12	0.136	0.168



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n25_Ant 2	20M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	381000	1905	24.53	25.70	1.309	-0.03	0.211	0.276
	FR1 n25_Ant 2	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	381000	1905	24.46	25.70	1.330	-0.13	0.216	0.287
	FR1 n25_Ant 2	20M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	381000	1905	24.53	25.70	1.309	-0.07	0.141	0.185
	FR1 n25_Ant 2	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	381000	1905	24.46	25.70	1.330	-0.18	0.134	0.178
	FR1 n25_Ant 2	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	381000	1905	24.53	25.70	1.309	-0.04	0.225	0.295
	FR1 n25_Ant 2	20M	BPSK	1	104	Left Cheek	0mm	DSI 2/7	372000	1860	24.36	25.70	1.361	-0.01	0.222	0.302
	FR1 n25_Ant 2	20M	BPSK	1	53	Left Cheek	0mm	DSI 2/7	376500	1882.5	24.52	25.70	1.312	-0.01	0.224	0.294
	FR1 n25_Ant 2	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	381000	1905	24.46	25.70	1.330	0.02	0.215	0.286
	FR1 n25_Ant 2	20M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	381000	1905	24.53	25.70	1.309	0.14	0.112	0.147
	FR1 n25_Ant 2	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	381000	1905	24.46	25.70	1.330	-0.11	0.100	0.133
	FR1 n25_Ant 0	20M	BPSK	1	53	Right Cheek	0mm	DSI 2/7	376500	1882.5	23.83	25.50	1.469	0.15	0.145	0.213
	FR1 n25_Ant 0	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	376500	1882.5	23.81	25.50	1.476	0.14	0.135	0.200
	FR1 n25_Ant 0	20M	BPSK	1	53	Right Tilted	0mm	DSI 2/7	376500	1882.5	23.83	25.50	1.469	0.1	0.117	0.172
	FR1 n25_Ant 0	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	376500	1882.5	23.81	25.50	1.476	0.09	0.118	0.175
	FR1 n25_Ant 0	20M	BPSK	1	53	Left Cheek	0mm	DSI 2/7	376500	1882.5	23.83	25.50	1.469	0.05	0.283	0.416
22	FR1 n25_Ant 0	20M	BPSK	1	104	Left Cheek	0mm	DSI 2/7	372000	1860	23.82	25.50	1.472	0.05	0.300	0.442
	FR1 n25_Ant 0	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	381000	1905	23.82	25.50	1.472	-0.02	0.271	0.400
	FR1 n25_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	376500	1882.5	23.81	25.50	1.476	0.04	0.278	0.410
	FR1 n25_Ant 0	20M	BPSK	1	53	Left Tilted	0mm	DSI 2/7	376500	1882.5	23.83	25.50	1.469	0.03	0.148	0.217
	FR1 n25_Ant 0	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	376500	1882.5	23.81	25.50	1.476	0.09	0.144	0.212
	FR1 n41_Ant 2	100M	BPSK	1	137	Right Cheek	0mm	DSI 2/7	518598	2592.99	24.70	25.70	1.259	-0.09	0.098	0.163
	FR1 n41_Ant 2	100M	BPSK	135	69	Right Cheek	0mm	DSI 2/7	518598	2592.99	24.63	25.70	1.279	0.02	0.094	0.159
	FR1 n41_Ant 2	100M	BPSK	1	137	Right Tilted	0mm	DSI 2/7	518598	2592.99	24.70	25.70	1.259	-0.05	0.050	0.083
	FR1 n41_Ant 2	100M	BPSK	135	69	Right Tilted	0mm	DSI 2/7	518598	2592.99	24.63	25.70	1.279	0.09	0.046	0.078
	FR1 n41_Ant 2	100M	BPSK	1	137	Left Cheek	0mm	DSI 2/7	518598	2592.99	24.70	25.70	1.259	0.01	0.081	0.135
	FR1 n41_Ant 2	100M	BPSK	135	69	Left Cheek	0mm	DSI 2/7	518598	2592.99	24.63	25.70	1.279	-0.01	0.080	0.135
	FR1 n41_Ant 2	100M	BPSK	1	137	Left Tilted	0mm	DSI 2/7	518598	2592.99	24.70	25.70	1.259	0.07	0.057	0.095
	FR1 n41_Ant 2	100M	BPSK	135	69	Left Tilted	0mm	DSI 2/7	518598	2592.99	24.63	25.70	1.279	-0.02	0.062	0.105
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	518598	2592.99	26.76	27.50	1.186	0.01	0.059	0.092
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Right Cheek	0mm	DSI 2/7	518598	2592.99	26.34	27.50	1.306	-0.05	0.037	0.064
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	518598	2592.99	26.76	27.50	1.186	0.01	0.001	0.002
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Right Tilted	0mm	DSI 2/7	518598	2592.99	26.34	27.50	1.306	-0.06	0.001	0.002
23	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	518598	2592.99	26.76	27.50	1.186	-0.05	0.265	0.415
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Left Cheek	0mm	DSI 2/7	518598	2592.99	26.34	27.50	1.306	0.07	0.188	0.324
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	518598	2592.99	26.76	27.50	1.186	0.02	0.001	0.002
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Left Tilted	0mm	DSI 2/7	518598	2592.99	26.34	27.50	1.306	0.15	0.001	0.002
	FR1 n41_Ant 0	100M	BPSK	1	271	Right Cheek	0mm	DSI 2/7	518598	2592.99	24.80	25.50	1.175	0.05	0.007	0.011
	FR1 n41_Ant 0	100M	BPSK	135	69	Right Cheek	0mm	DSI 2/7	518598	2592.99	24.60	25.50	1.230	-0.06	0.009	0.015
	FR1 n41_Ant 0	100M	BPSK	1	271	Right Tilted	0mm	DSI 2/7	518598	2592.99	24.80	25.50	1.175	0.01	0.001	0.002
	FR1 n41_Ant 0	100M	BPSK	135	69	Right Tilted	0mm	DSI 2/7	518598	2592.99	24.60	25.50	1.230	0.1	0.001	0.002
	FR1 n41_Ant 0	100M	BPSK	1	271	Left Cheek	0mm	DSI 2/7	518598	2592.99	24.80	25.50	1.175	-0.08	0.011	0.017
	FR1 n41_Ant 0	100M	BPSK	135	69	Left Cheek	0mm	DSI 2/7	518598	2592.99	24.60	25.50	1.230	-0.08	0.020	0.032
	FR1 n41_Ant 0	100M	BPSK	1	271	Left Tilted	0mm	DSI 2/7	518598	2592.99	24.80	25.50	1.175	0.05	0.001	0.002
	FR1 n41_Ant 0	100M	BPSK	135	69	Left Tilted	0mm	DSI 2/7	518598	2592.99	24.60	25.50	1.230	-0.07	0.001	0.002



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant 2	20M	BPSK	1	53	Right Cheek	0mm	DSI 2/7	349000	1745	24.56	25.70	1.300	-0.04	0.244	0.318
	FR1 n66_Ant 2	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	349000	1745	24.48	25.70	1.324	-0.06	0.238	0.315
	FR1 n66_Ant 2	20M	BPSK	1	53	Right Tilted	0mm	DSI 2/7	349000	1745	24.56	25.70	1.300	-0.16	0.174	0.226
	FR1 n66_Ant 2	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	349000	1745	24.48	25.70	1.324	-0.09	0.167	0.221
	FR1 n66_Ant 2	20M	BPSK	1	53	Left Cheek	0mm	DSI 2/7	349000	1745	24.56	25.70	1.300	0.06	0.309	0.402
	FR1 n66_Ant 2	20M	BPSK	1	104	Left Cheek	0mm	DSI 2/7	344000	1720	24.55	25.70	1.303	-0.07	0.290	0.378
	FR1 n66_Ant 2	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	354000	1770	24.54	25.70	1.306	0.01	0.244	0.319
	FR1 n66_Ant 2	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	349000	1745	24.48	25.70	1.324	0.09	0.299	0.397
	FR1 n66_Ant 2	20M	BPSK	1	53	Left Tilted	0mm	DSI 2/7	349000	1745	24.56	25.70	1.300	0.13	0.159	0.206
	FR1 n66_Ant 2	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	349000	1745	24.48	25.70	1.324	0.17	0.158	0.209
	FR1 n66_Ant 0	20M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	349000	1745	23.87	25.50	1.455	-0.12	0.165	0.240
	FR1 n66_Ant 0	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	349000	1745	23.78	25.50	1.486	0.19	0.166	0.247
	FR1 n66_Ant 0	20M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	349000	1745	23.87	25.50	1.455	-0.12	0.160	0.232
	FR1 n66_Ant 0	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	349000	1745	23.78	25.50	1.486	0.13	0.157	0.234
	FR1 n66_Ant 0	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	349000	1745	23.87	25.50	1.455	-0.03	0.328	0.477
24	FR1 n66_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	349000	1745	23.78	25.50	1.486	-0.03	0.331	0.492
	FR1 n66_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	344000	1720	23.72	25.50	1.507	-0.04	0.290	0.437
	FR1 n66_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	354000	1770	23.73	25.50	1.503	0.13	0.284	0.427
	FR1 n66_Ant 0	20M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	349000	1745	23.87	25.50	1.455	0.12	0.166	0.242
	FR1 n66_Ant 0	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	349000	1745	23.78	25.50	1.486	-0.1	0.168	0.250
	FR1 n71_Ant 0	20M	BPSK	1	53	Right Cheek	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.08	0.067	0.090
	FR1 n71_Ant 0	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.17	0.069	0.092
	FR1 n71_Ant 0	20M	BPSK	1	53	Right Tilted	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.03	0.011	0.015
	FR1 n71_Ant 0	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.18	0.008	0.011
	FR1 n71_Ant 0	20M	BPSK	1	53	Left Cheek	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.02	0.092	0.123
	FR1 n71_Ant 0	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	-0.1	0.094	0.126
	FR1 n71_Ant 0	20M	BPSK	1	53	Left Tilted	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.13	0.061	0.082
	FR1 n71_Ant 0	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	136100	680.5	24.44	25.70	1.337	0.16	0.058	0.078
	FR1 n71_Ant 1	20M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	136100	680.5	23.43	25.00	1.435	0.09	0.328	0.471
25	FR1 n71_Ant 1	20M	BPSK	50	28	Right Cheek	0mm	DSI 2/7	136100	680.5	23.30	25.00	1.479	0.02	0.367	0.543
	FR1 n71_Ant 1	20M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	136100	680.5	23.43	25.00	1.435	0.07	0.297	0.426
	FR1 n71_Ant 1	20M	BPSK	50	28	Right Tilted	0mm	DSI 2/7	136100	680.5	23.30	25.00	1.479	0.02	0.328	0.485
	FR1 n71_Ant 1	20M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	136100	680.5	23.43	25.00	1.435	0.05	0.185	0.266
	FR1 n71_Ant 1	20M	BPSK	50	28	Left Cheek	0mm	DSI 2/7	136100	680.5	23.30	25.00	1.479	0.01	0.209	0.309
	FR1 n71_Ant 1	20M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	136100	680.5	23.43	25.00	1.435	0.1	0.167	0.240
	FR1 n71_Ant 1	20M	BPSK	50	28	Left Tilted	0mm	DSI 2/7	136100	680.5	23.30	25.00	1.479	0.08	0.195	0.288
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Right Cheek	0mm	DSI 2/7	656000	3840	25.26	26.50	1.330	-0.01	0.141	0.248
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Right Cheek	0mm	DSI 2/7	656000	3840	25.11	26.50	1.377	-0.06	0.128	0.233
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Right Tilted	0mm	DSI 2/7	656000	3840	25.26	26.50	1.330	0.05	0.167	0.293
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Right Tilted	0mm	DSI 2/7	656000	3840	25.11	26.50	1.377	0.08	0.158	0.287
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Left Cheek	0mm	DSI 2/7	656000	3840	25.26	26.50	1.330	-0.15	0.173	0.304
26	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Left Cheek	0mm	DSI 2/7	656000	3840	25.11	26.50	1.377	-0.04	0.187	0.340
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Left Tilted	0mm	DSI 2/7	656000	3840	25.26	26.50	1.330	0.12	0.105	0.184
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Left Tilted	0mm	DSI 2/7	656000	3840	25.11	26.50	1.377	-0.07	0.106	0.193
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Right Cheek	0mm	DSI 2/7	656000	3840	24.64	26.00	1.368	0.13	0.063	0.114
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Right Cheek	0mm	DSI 2/7	656000	3840	24.48	26.00	1.419	0.1	0.072	0.135
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Right Tilted	0mm	DSI 2/7	656000	3840	24.64	26.00	1.368	0.03	0.051	0.092
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Right Tilted	0mm	DSI 2/7	656000	3840	24.48	26.00	1.419	-0.09	0.045	0.084
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Left Cheek	0mm	DSI 2/7	656000	3840	24.64	26.00	1.368	-0.01	0.041	0.074
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Left Cheek	0mm	DSI 2/7	656000	3840	24.48	26.00	1.419	-0.13	0.046	0.086
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Left Tilted	0mm	DSI 2/7	656000	3840	24.64	26.00	1.368	-0.12	0.001	0.002
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Left Tilted	0mm	DSI 2/7	656000	3840	24.48	26.00	1.419	0.07	0.001	0.002



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4	2	6	2437	15.90	16.00	1.023	100	1.000	0.1	0.159	0.163
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4	2	6	2437	15.90	16.00	1.023	100	1.000	-0.16	0.088	0.090
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4	2	6	2437	15.90	16.00	1.023	100	1.000	-0.12	0.236	0.241
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4	2	6	2437	15.90	16.00	1.023	100	1.000	0.18	0.232	0.237
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 3	2	6	2437	18.90	19.00	1.023	100	1.000	-0.18	0.209	0.214
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 3	2	6	2437	18.90	19.00	1.023	100	1.000	0.18	0.118	0.121
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 3	2	6	2437	18.90	19.00	1.023	100	1.000	-0.13	0.427	0.437
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 3	2	6	2437	18.90	19.00	1.023	100	1.000	0.11	0.074	0.076
27	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+3(4)	2	1	2412	17.80	18.00	1.047	100	1.000	-0.16	0.150	0.157
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+3(3)	2	1	2412	19.90	20.00	1.023	100	1.000	-0.16	0.329	0.337
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(4)	2	1	2412	17.80	18.00	1.047	100	1.000	-0.13	0.592	0.620
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(3)	2	1	2412	19.90	20.00	1.023	100	1.000	-0.13	0.012	0.012
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(4)	2	6	2437	17.60	18.00	1.096	100	1.000	-0.01	0.378	0.414
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(3)	2	6	2437	19.80	20.00	1.047	100	1.000	-0.01	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(4)	2	11	2462	17.60	18.00	1.096	100	1.000	-0.03	0.473	0.519
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+3(3)	2	11	2462	19.80	20.00	1.047	100	1.000	-0.03	0.021	0.022
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4+3(4)	2	1	2412	17.80	18.00	1.047	100	1.000	-0.08	0.495	0.518
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4+3(3)	2	1	2412	19.90	20.00	1.023	100	1.000	-0.08	0.505	0.517
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4+3(4)	2	1	2412	17.80	18.00	1.047	100	1.000	-0.06	0.321	0.336
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4+3(3)	2	1	2412	19.90	20.00	1.023	100	1.000	-0.06	0.001	0.001

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	2	58	5290	15.50	15.50	1.000	92.11	1.086	-0.05	0.306	0.332
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	2	58	5290	15.50	15.50	1.000	92.11	1.086	-0.04	0.391	0.425
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	2	58	5290	15.50	15.50	1.000	92.11	1.086	0.07	0.251	0.273
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	2	58	5290	15.50	15.50	1.000	92.11	1.086	0	0.566	0.615
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 3	2	54	5270	16.70	17.00	1.072	95.3	1.049	-0.1	0.082	0.092
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 3	2	54	5270	16.70	17.00	1.072	95.3	1.049	0.07	0.010	0.011
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 3	2	54	5270	16.70	17.00	1.072	95.3	1.049	0.16	0.305	0.343
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 3	2	54	5270	16.70	17.00	1.072	95.3	1.049	0.06	0.004	0.005
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 4+3(4)	2	54	5270	15.20	15.50	1.072	95.37	1.049	0	0.296	0.333
	WLAN5GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 4+3(3)	2	54	5270	17.20	17.50	1.072	95.37	1.049	0	0.093	0.105
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 4+3(4)	2	54	5270	15.20	15.50	1.072	95.37	1.049	-0.13	0.368	0.414
	WLAN5GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 4+3(3)	2	54	5270	17.20	17.50	1.072	95.37	1.049	-0.13	0.001	0.001
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 4+3(4)	2	54	5270	15.20	15.50	1.072	95.37	1.049	0.1	0.252	0.283
	WLAN5GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 4+3(3)	2	54	5270	17.20	17.50	1.072	95.37	1.049	0.1	0.359	0.404
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	54	5270	15.20	15.50	1.072	95.37	1.049	-0.19	0.578	0.650
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	54	5270	17.20	17.50	1.072	95.37	1.049	-0.19	0.017	0.019
28	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	62	5310	15.20	15.50	1.072	95.37	1.049	-0.07	0.604	0.679
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	62	5310	16.90	17.00	1.023	95.37	1.049	-0.07	0.016	0.017



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	2	138	5690	14.20	14.50	1.072	92.11	1.086	0.06	0.262	0.305
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	2	138	5690	14.20	14.50	1.072	92.11	1.086	-0.02	0.323	0.376
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	2	138	5690	14.20	14.50	1.072	92.11	1.086	-0.15	0.268	0.312
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	2	138	5690	14.20	14.50	1.072	92.11	1.086	-0.07	0.431	0.502
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	2	138	5690	14.60	15.00	1.096	92.62	1.080	0.02	0.041	0.049
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	2	138	5690	14.60	15.00	1.096	92.62	1.080	0.13	0.033	0.039
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	2	138	5690	14.60	15.00	1.096	92.62	1.080	-0.13	0.515	0.610
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	2	138	5690	14.60	15.00	1.096	92.62	1.080	-0.03	0.013	0.015
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+3(4)	2	122	5610	14.40	14.50	1.023	91.78	1.090	0.15	0.313	0.349
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+3(3)	2	122	5610	15.40	15.50	1.023	91.78	1.090	0.15	0.164	0.183
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+3(4)	2	122	5610	14.40	14.50	1.023	91.78	1.090	0.13	0.386	0.431
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+3(3)	2	122	5610	15.40	15.50	1.023	91.78	1.090	0.13	0.028	0.031
29	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(4)	2	122	5610	14.40	14.50	1.023	91.78	1.090	-0.05	0.360	0.402
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(3)	2	122	5610	15.40	15.50	1.023	91.78	1.090	-0.05	0.659	0.735
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(4)	2	106	5530	14.30	14.50	1.047	91.78	1.090	-0.05	0.427	0.487
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(3)	2	106	5530	14.40	14.50	1.023	91.78	1.090	-0.05	0.337	0.376
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(4)	2	138	5690	14.40	14.50	1.023	91.78	1.090	-0.05	0.289	0.322
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(3)	2	138	5690	15.10	15.50	1.096	91.78	1.090	-0.05	0.520	0.621
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	122	5610	14.40	14.50	1.023	91.78	1.090	0.04	0.465	0.519
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	122	5610	15.40	15.50	1.023	91.78	1.090	0.04	0.088	0.098
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4	2	155	5775	14.70	15.00	1.072	92.11	1.086	-0.01	0.363	0.422
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4	2	155	5775	14.70	15.00	1.072	92.11	1.086	-0.09	0.333	0.388
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4	2	155	5775	14.70	15.00	1.072	92.11	1.086	-0.06	0.360	0.419
30	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4	2	155	5775	14.70	15.00	1.072	92.11	1.086	0.16	0.516	0.600
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	2	155	5775	14.70	15.00	1.072	92.62	1.080	0.06	0.039	0.045
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	2	155	5775	14.70	15.00	1.072	92.62	1.080	-0.05	0.016	0.019
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	2	155	5775	14.70	15.00	1.072	92.62	1.080	0.16	0.329	0.381
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	2	155	5775	14.70	15.00	1.072	92.62	1.080	-0.19	0.159	0.184
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+3(4)	2	155	5775	14.50	14.50	1.000	91.78	1.090	-0.02	0.347	0.378
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 4+3(3)	2	155	5775	16.60	17.00	1.096	91.78	1.090	-0.02	0.114	0.136
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+3(4)	2	155	5775	14.50	14.50	1.000	91.78	1.090	-0.02	0.421	0.459
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 4+3(3)	2	155	5775	16.60	17.00	1.096	91.78	1.090	-0.02	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(4)	2	155	5775	14.50	14.50	1.000	91.78	1.090	-0.02	0.252	0.275
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 4+3(3)	2	155	5775	16.60	17.00	1.096	91.78	1.090	-0.02	0.497	0.594
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	155	5775	14.50	14.50	1.000	91.78	1.090	0.07	0.474	0.517
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	155	5775	16.60	17.00	1.096	91.78	1.090	0.07	0.001	0.001

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 4	2	78	2480	14.30	14.50	1.047	77.07	1.081	-0.02	0.024	0.027
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 4	2	78	2480	14.30	14.50	1.047	77.07	1.081	0.08	0.037	0.042
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	2	78	2480	14.30	14.50	1.047	77.07	1.081	-0.03	0.037	0.042
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	2	0	2402	13.20	14.50	1.349	77.07	1.081	-0.03	0.039	0.057
31	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	2	39	2441	13.90	14.50	1.148	77.07	1.081	0.02	0.108	0.134
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 4	2	78	2480	14.30	14.50	1.047	77.07	1.081	0.15	0.076	0.086

15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	DSI 6	189	836.4	28.00	29.50	1.413	-0.11	0.241	0.340
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 6	189	836.4	28.00	29.50	1.413	0.05	0.312	0.441
32	GSM850_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	189	836.4	28.00	29.50	1.413	-0.1	0.390	0.551
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	128	824.2	27.77	29.50	1.489	0.02	0.366	0.545
	GSM850_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	251	848.8	27.60	29.50	1.549	-0.12	0.277	0.429
	GSM850_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	DSI 6	189	836.4	28.00	29.50	1.413	-0.12	0.201	0.284
	GSM850_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	DSI 6	189	836.4	28.00	29.50	1.413	0.14	0.239	0.338
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	DSI 6	128	824.2	27.38	28.20	1.208	-0.13	0.163	0.197
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 6	128	824.2	27.38	28.20	1.208	-0.16	0.265	0.320
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 6	189	836.4	27.27	28.20	1.239	-0.11	0.312	0.387
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 6	251	848.8	27.36	28.20	1.213	-0.15	0.295	0.358
	GSM850_Ant 1	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	128	824.2	27.38	28.20	1.208	-0.06	0.110	0.133
	GSM850_Ant 1	GPRS (4 Tx slots)	Right Side	10mm	DSI 6	128	824.2	27.38	28.20	1.208	-0.12	0.106	0.128
	GSM850_Ant 1	GPRS (4 Tx slots)	Top Side	10mm	DSI 6	128	824.2	27.38	28.20	1.208	-0.12	0.147	0.178
	GSM1900_Ant 2	GPRS (4 Tx slots)	Front	10mm	DSI 6	810	1909.8	26.37	27.00	1.156	-0.01	0.335	0.387
	GSM1900_Ant 2	GPRS (4 Tx slots)	Back	10mm	DSI 6	810	1909.8	26.37	27.00	1.156	-0.13	0.457	0.528
	GSM1900_Ant 2	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	810	1909.8	26.37	27.00	1.156	0.11	0.122	0.141
	GSM1900_Ant 2	GPRS (4 Tx slots)	Right Side	10mm	DSI 6	810	1909.8	26.37	27.00	1.156	0.19	0.215	0.249
	GSM1900_Ant 2	GPRS (4 Tx slots)	Bottom Side	10mm	DSI 6	810	1909.8	26.37	27.00	1.156	0.06	0.533	0.616
33	GSM1900_Ant 2	GPRS (4 Tx slots)	Bottom Side	10mm	DSI 6	661	1880	26.00	27.00	1.259	-0.02	0.624	0.786
	GSM1900_Ant 2	GPRS(4 Tx slots)	Bottom Side	10mm	DSI 6	512	1850.2	26.17	27.00	1.211	0.13	0.369	0.447
	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	DSI 6	661	1880	25.84	26.70	1.219	-0.11	0.182	0.222
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 6	661	1880	25.84	26.70	1.219	-0.17	0.370	0.451
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 6	512	1850.2	25.51	26.70	1.315	-0.03	0.343	0.451
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 6	810	1909.8	25.63	26.70	1.279	0.04	0.385	0.493
	GSM1900_Ant 0	GPRS (4 Tx slots)	Left Side	10mm	DSI 6	661	1880	25.84	26.70	1.219	-0.09	0.323	0.394
	GSM1900_Ant 0	GPRS (4 Tx slots)	Right Side	10mm	DSI 6	661	1880	25.84	26.70	1.219	-0.1	0.022	0.027
	GSM1900_Ant 0	GPRS (4 Tx slots)	Bottom Side	10mm	DSI 6	661	1880	25.84	26.70	1.219	-0.08	0.183	0.223

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
34	WCDMA II_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 6	9538	1907.6	24.49	24.90	1.099	0.03	0.522	0.574
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 6	9538	1907.6	24.49	24.90	1.099	-0.15	0.776	0.853
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 6	9262	1852.4	24.13	24.90	1.194	-0.11	0.635	0.758
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 6	9400	1880	24.37	24.90	1.130	-0.07	0.731	0.826
	WCDMA II_Ant 2	RMC 12.2Kbps	Left Side	10mm	DSI 6	9538	1907.6	24.49	24.90	1.099	0.03	0.175	0.192
	WCDMA II_Ant 2	RMC 12.2Kbps	Right Side	10mm	DSI 6	9538	1907.6	24.49	24.90	1.099	0.06	0.349	0.384
	WCDMA II_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	9538	1907.6	24.49	24.90	1.099	-0.06	0.757	0.832
	WCDMA II_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	9262	1852.4	24.13	24.90	1.194	0	0.682	0.814
	WCDMA II_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	9400	1880	24.37	24.90	1.130	-0.02	0.677	0.765
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 6	9538	1907.6	23.98	25.50	1.419	-0.04	0.365	0.518
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	9538	1907.6	23.98	25.50	1.419	-0.13	0.576	0.817
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	9262	1852.4	23.75	25.50	1.496	-0.18	0.446	0.667
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	9400	1880	23.79	25.50	1.483	-0.19	0.538	0.798
	WCDMA II_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	9538	1907.6	23.98	25.50	1.419	-0.04	0.521	0.739
	WCDMA II_Ant 0	RMC 12.2Kbps	Right Side	10mm	DSI 6	9538	1907.6	23.98	25.50	1.419	-0.15	0.011	0.016
	WCDMA II_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	9538	1907.6	23.98	25.50	1.419	-0.09	0.337	0.478
	WCDMA IV_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 6	1413	1732.6	23.84	24.4	1.138	-0.14	0.519	0.590
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 6	1413	1732.6	23.84	24.4	1.138	-0.07	0.538	0.612
	WCDMA IV_Ant 2	RMC 12.2Kbps	Left Side	10mm	DSI 6	1413	1732.6	23.84	24.4	1.138	-0.13	0.109	0.124
	WCDMA IV_Ant 2	RMC 12.2Kbps	Right Side	10mm	DSI 6	1413	1732.6	23.84	24.4	1.138	-0.12	0.428	0.487
	WCDMA IV_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	1413	1732.6	23.84	24.4	1.138	-0.14	0.596	0.678
	WCDMA IV_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	1312	1712.4	23.75	24.4	1.161	-0.18	0.548	0.636
	WCDMA IV_Ant 2	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	1513	1752.6	23.76	24.4	1.159	-0.11	0.586	0.679
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 6	1413	1732.6	24.01	25.50	1.409	0.06	0.259	0.365
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	1413	1732.6	24.01	25.50	1.409	-0.06	0.608	0.857
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	1312	1712.4	23.89	25.50	1.449	-0.1	0.594	0.861
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	1513	1752.6	23.97	25.50	1.422	-0.14	0.637	0.906
35	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	1413	1732.6	24.01	25.50	1.409	-0.09	0.604	0.851
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	1312	1712.4	23.89	25.50	1.449	-0.09	0.557	0.807
	WCDMA IV_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	1513	1752.6	23.97	25.50	1.422	-0.06	0.638	0.907
	WCDMA IV_Ant 0	RMC 12.2Kbps	Right Side	10mm	DSI 6	1413	1732.6	24.01	25.50	1.409	-0.05	0.007	0.010
	WCDMA IV_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	1413	1732.6	24.01	25.50	1.409	0	0.371	0.523
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 6	4182	836.4	24.17	25.70	1.422	-0.15	0.232	0.330
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 6	4182	836.4	24.17	25.70	1.422	0	0.320	0.455
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	4182	836.4	24.17	25.70	1.422	-0.08	0.354	0.504
	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	4132	826.4	24.08	25.70	1.452	-0.08	0.349	0.507
36	WCDMA V_Ant 0	RMC 12.2Kbps	Left Side	10mm	DSI 6	4233	846.6	24.16	25.70	1.426	-0.08	0.319	0.455
	WCDMA V_Ant 0	RMC 12.2Kbps	Right Side	10mm	DSI 6	4182	836.4	24.17	25.70	1.422	-0.01	0.196	0.279
	WCDMA V_Ant 0	RMC 12.2Kbps	Bottom Side	10mm	DSI 6	4182	836.4	24.17	25.70	1.422	0.15	0.208	0.296
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	10mm	DSI 6	4182	836.4	23.62	25.00	1.374	-0.18	0.132	0.181
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 6	4182	836.4	23.62	25.00	1.374	0.05	0.216	0.297
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 6	4132	826.4	23.57	25.00	1.390	-0.12	0.286	0.398
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 6	4233	846.6	23.57	25.00	1.390	-0.11	0.272	0.378
	WCDMA V_Ant 1	RMC 12.2Kbps	Left Side	10mm	DSI 6	4182	836.4	23.62	25.00	1.374	-0.16	0.141	0.194
	WCDMA V_Ant 1	RMC 12.2Kbps	Right Side	10mm	DSI 6	4182	836.4	23.62	25.00	1.374	-0.14	0.123	0.169
	WCDMA V_Ant 1	RMC 12.2Kbps	Top Side	10mm	DSI 6	4182	836.4	23.62	25.00	1.374	-0.03	0.157	0.216

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Front	10mm	DSI 6	777	848.31	24.16	25.50	1.361	-0.12	0.243	0.331
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Back	10mm	DSI 6	777	848.31	24.16	25.50	1.361	-0.06	0.344	0.468
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Left Side	10mm	DSI 6	777	848.31	24.16	25.50	1.361	-0.13	0.358	0.487
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Left Side	10mm	DSI 6	1013	824.7	24.11	25.50	1.377	-0.14	0.322	0.443
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Left Side	10mm	DSI 6	384	836.52	24.12	25.50	1.374	-0.09	0.353	0.485
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Right Side	10mm	DSI 6	777	848.31	24.16	25.50	1.361	-0.09	0.193	0.263
	CDMA BC0_Ant 0	RTAP 153.6Kbps	Bottom Side	10mm	DSI 6	777	848.31	24.16	25.50	1.361	0.17	0.229	0.312
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Front	10mm	DSI 6	384	836.52	23.76	25.50	1.493	-0.1	0.166	0.248
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Back	10mm	DSI 6	384	836.52	23.76	25.50	1.493	-0.17	0.253	0.378
37	CDMA BC0_Ant 1	RTAP 153.6Kbps	Back	10mm	DSI 6	1013	824.7	23.69	25.50	1.517	-0.06	0.327	0.496
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Back	10mm	DSI 6	777	848.31	23.67	25.50	1.524	-0.09	0.293	0.447
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Left Side	10mm	DSI 6	384	836.52	23.76	25.50	1.493	-0.15	0.162	0.242
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Right Side	10mm	DSI 6	384	836.52	23.76	25.50	1.493	0.03	0.139	0.207
	CDMA BC0_Ant 1	RTAP 153.6Kbps	Top Side	10mm	DSI 6	384	820.5	23.76	25.50	1.493	-0.02	0.227	0.339
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Front	10mm	DSI 6	1175	1908.75	23.45	24.30	1.216	-0.02	0.453	0.551
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Back	10mm	DSI 6	1175	1908.75	23.45	24.30	1.216	-0.11	0.659	0.801
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Back	10mm	DSI 6	25	1851.25	23.00	24.30	1.349	-0.13	0.495	0.668
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Back	10mm	DSI 6	600	1880	23.19	24.30	1.291	-0.08	0.581	0.750
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Left Side	10mm	DSI 6	1175	1908.75	23.45	24.30	1.216	-0.07	0.138	0.168
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Right Side	10mm	DSI 6	1175	1908.75	23.45	24.30	1.216	0.04	0.288	0.350
	CDMA BC1_Ant 2	RTAP 153.6Kbps	Bottom Side	10mm	DSI 6	1175	1908.75	23.45	24.30	1.216	-0.05	0.645	0.784
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Front	10mm	DSI 6	1175	1908.75	24.08	25.50	1.387	-0.08	0.398	0.552
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Back	10mm	DSI 6	1175	1908.75	24.08	25.50	1.387	-0.12	0.624	0.865
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Back	10mm	DSI 6	25	1851.25	23.63	25.50	1.538	-0.12	0.535	0.823
38	CDMA BC1_Ant 0	RTAP 153.6Kbps	Back	10mm	DSI 6	600	1880	23.92	25.50	1.439	-0.12	0.612	0.881
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Left Side	10mm	DSI 6	1175	1908.75	24.08	25.50	1.387	0.01	0.517	0.717
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Right Side	10mm	DSI 6	1175	1908.75	24.08	25.50	1.387	-0.18	0.029	0.040
	CDMA BC1_Ant 0	RTAP 153.6Kbps	Bottom Side	10mm	DSI 6	1175	1908.75	24.08	25.50	1.387	0.01	0.280	0.388
	CDMA BC10_Ant 0	RTAP 153.6Kbps	Front	10mm	DSI 6	580	820.5	24.13	25.50	1.371	-0.11	0.254	0.348
	CDMA BC10_Ant 0	RTAP 153.6Kbps	Back	10mm	DSI 6	580	820.5	24.13	25.50	1.371	-0.06	0.323	0.443
	CDMA BC10_Ant 0	RTAP 153.6Kbps	Left Side	10mm	DSI 6	580	820.5	24.13	25.50	1.371	-0.12	0.333	0.457
	CDMA BC10_Ant 0	RTAP 153.6Kbps	Right Side	10mm	DSI 6	580	820.5	24.13	25.50	1.371	-0.07	0.201	0.276
	CDMA BC10_Ant 0	RTAP 153.6Kbps	Bottom Side	10mm	DSI 6	580	820.5	24.13	25.50	1.371	0.18	0.210	0.288
	CDMA BC10_Ant 1	RTAP 153.6Kbps	Front	10mm	DSI 6	580	820.5	23.72	25.50	1.507	-0.09	0.177	0.267
39	CDMA BC10_Ant 1	RTAP 153.6Kbps	Back	10mm	DSI 6	580	820.5	23.72	25.50	1.507	-0.08	0.330	0.497
	CDMA BC10_Ant 1	RTAP 153.6Kbps	Left Side	10mm	DSI 6	580	820.5	23.72	25.50	1.507	0.06	0.154	0.232
	CDMA BC10_Ant 1	RTAP 153.6Kbps	Right Side	10mm	DSI 6	580	820.5	23.72	25.50	1.507	-0.13	0.129	0.194
	CDMA BC10_Ant 1	RTAP 153.6Kbps	Top Side	10mm	DSI 6	580	820.5	23.72	25.50	1.507	-0.03	0.203	0.306



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	21100	2535	22.97	23.30	1.079	-0.03	0.461	0.497
	LTE Band 7_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 6	21100	2535	22.87	23.30	1.104	-0.11	0.469	0.518
	LTE Band 7_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	21100	2535	22.97	23.30	1.079	-0.02	0.587	0.633
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	21100	2535	22.87	23.30	1.104	0.01	0.612	0.676
	LTE Band 7_Ant 2	20M	QPSK	1	99	Left Side	10mm	DSI 6	21100	2535	22.97	23.30	1.079	0.09	0.110	0.119
	LTE Band 7_Ant 2	20M	QPSK	50	50	Left Side	10mm	DSI 6	21100	2535	22.87	23.30	1.104	0.12	0.114	0.126
	LTE Band 7_Ant 2	20M	QPSK	1	99	Right Side	10mm	DSI 6	21100	2535	22.97	23.30	1.079	0.14	0.263	0.284
	LTE Band 7_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 6	21100	2535	22.87	23.30	1.104	0.17	0.270	0.298
	LTE Band 7_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	21100	2535	22.97	23.30	1.079	-0.15	0.637	0.687
	LTE Band 7_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	21100	2535	22.87	23.30	1.104	-0.11	0.661	0.730
	LTE Band 7_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	20850	2510	22.59	23.30	1.178	-0.1	0.614	0.723
40	LTE Band 7_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	21350	2560	22.86	23.30	1.107	-0.12	0.661	0.731
	LTE Band 7_Ant 0	20M	QPSK	1	99	Front	10mm	DSI 6	21100	2535	24.06	25.50	1.393	-0.02	0.127	0.177
	LTE Band 7_Ant 0	20M	QPSK	50	50	Front	10mm	DSI 6	21100	2535	23.16	24.50	1.361	-0.04	0.107	0.146
	LTE Band 7_Ant 0	20M	QPSK	1	99	Back	10mm	DSI 6	21100	2535	24.06	25.50	1.393	-0.01	0.242	0.337
	LTE Band 7_Ant 0	20M	QPSK	50	50	Back	10mm	DSI 6	21100	2535	23.16	24.50	1.361	-0.05	0.194	0.264
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	21100	2535	24.06	25.50	1.393	-0.01	0.354	0.493
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	20850	2510	23.99	25.50	1.416	0.09	0.375	0.531
	LTE Band 7_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	21350	2560	24.02	25.50	1.406	-0.13	0.295	0.415
	LTE Band 7_Ant 0	20M	QPSK	50	50	Left Side	10mm	DSI 6	21100	2535	23.16	24.50	1.361	-0.03	0.302	0.411
	LTE Band 7_Ant 0	20M	QPSK	1	99	Right Side	10mm	DSI 6	21100	2535	24.06	25.50	1.393	0.03	0.026	0.036
	LTE Band 7_Ant 0	20M	QPSK	50	50	Right Side	10mm	DSI 6	21100	2535	23.16	24.50	1.361	0.19	0.022	0.030
	LTE Band 7_Ant 0	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	21100	2535	24.06	25.50	1.393	-0.14	0.156	0.217
	LTE Band 7_Ant 0	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	21100	2535	23.16	24.50	1.361	-0.05	0.130	0.177
	LTE Band 12_Ant 0	10M	QPSK	1	49	Front	10mm	DSI 6	23095	707.5	24.63	25.70	1.279	-0.14	0.273	0.349
	LTE Band 12_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 6	23095	707.5	23.79	24.70	1.233	-0.14	0.224	0.276
41	LTE Band 12_Ant 0	10M	QPSK	1	49	Back	10mm	DSI 6	23095	707.5	24.63	25.70	1.279	-0.1	0.367	0.470
	LTE Band 12_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 6	23095	707.5	23.79	24.70	1.233	-0.11	0.308	0.380
	LTE Band 12_Ant 0	10M	QPSK	1	49	Left Side	10mm	DSI 6	23095	707.5	24.63	25.70	1.279	-0.06	0.354	0.453
	LTE Band 12_Ant 0	10M	QPSK	25	25	Left Side	10mm	DSI 6	23095	707.5	23.79	24.70	1.233	-0.06	0.306	0.377
	LTE Band 12_Ant 0	10M	QPSK	1	49	Right Side	10mm	DSI 6	23095	707.5	24.63	25.70	1.279	-0.05	0.220	0.281
	LTE Band 12_Ant 0	10M	QPSK	25	25	Right Side	10mm	DSI 6	23095	707.5	23.79	24.70	1.233	-0.04	0.173	0.213
	LTE Band 12_Ant 0	10M	QPSK	1	49	Bottom Side	10mm	DSI 6	23095	707.5	24.63	25.70	1.279	0.11	0.100	0.128
	LTE Band 12_Ant 0	10M	QPSK	25	25	Bottom Side	10mm	DSI 6	23095	707.5	23.79	24.70	1.233	0.12	0.081	0.100
	LTE Band 12_Ant 1	10M	QPSK	1	49	Front	10mm	DSI 6	23095	707.5	24.43	25.70	1.340	-0.04	0.193	0.259
	LTE Band 12_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 6	23095	707.5	23.59	24.70	1.291	-0.06	0.154	0.199
	LTE Band 12_Ant 1	10M	QPSK	1	49	Back	10mm	DSI 6	23095	707.5	24.43	25.70	1.340	-0.01	0.258	0.346
	LTE Band 12_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 6	23095	707.5	23.59	24.70	1.291	-0.03	0.196	0.253
	LTE Band 12_Ant 1	10M	QPSK	1	49	Left Side	10mm	DSI 6	23095	707.5	24.43	25.70	1.340	-0.06	0.329	0.441
	LTE Band 12_Ant 1	10M	QPSK	25	25	Left Side	10mm	DSI 6	23095	707.5	23.59	24.70	1.291	-0.04	0.278	0.359
	LTE Band 12_Ant 1	10M	QPSK	1	49	Right Side	10mm	DSI 6	23095	707.5	24.43	25.70	1.340	-0.04	0.144	0.193
	LTE Band 12_Ant 1	10M	QPSK	25	25	Right Side	10mm	DSI 6	23095	707.5	23.59	24.70	1.291	0.02	0.133	0.172
	LTE Band 12_Ant 1	10M	QPSK	1	49	Top Side	10mm	DSI 6	23095	707.5	24.43	25.70	1.340	0.04	0.144	0.193
	LTE Band 12_Ant 1	10M	QPSK	25	25	Top Side	10mm	DSI 6	23095	707.5	23.59	24.70	1.291	-0.04	0.130	0.168



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
42	LTE Band 13_Ant 0	10M	QPSK	1	49	Front	10mm	DSI 6	23230	782	24.10	25.20	1.288	0.02	0.241	0.310
	LTE Band 13_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 6	23230	782	23.19	24.20	1.262	-0.13	0.196	0.247
	LTE Band 13_Ant 0	10M	QPSK	1	49	Back	10mm	DSI 6	23230	782	24.10	25.20	1.288	-0.15	0.291	0.375
	LTE Band 13_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 6	23230	782	23.19	24.20	1.262	0.02	0.241	0.304
	LTE Band 13_Ant 0	10M	QPSK	1	49	Left Side	10mm	DSI 6	23230	782	24.10	25.20	1.288	-0.06	0.260	0.335
	LTE Band 13_Ant 0	10M	QPSK	25	25	Left Side	10mm	DSI 6	23230	782	23.19	24.20	1.262	-0.1	0.237	0.299
	LTE Band 13_Ant 0	10M	QPSK	1	49	Right Side	10mm	DSI 6	23230	782	24.10	25.20	1.288	-0.05	0.225	0.290
	LTE Band 13_Ant 0	10M	QPSK	25	25	Right Side	10mm	DSI 6	23230	782	23.19	24.20	1.262	-0.06	0.188	0.237
	LTE Band 13_Ant 0	10M	QPSK	1	49	Bottom Side	10mm	DSI 6	23230	782	24.10	25.20	1.288	0.12	0.125	0.161
	LTE Band 13_Ant 0	10M	QPSK	25	25	Bottom Side	10mm	DSI 6	23230	782	23.19	24.20	1.262	0.11	0.103	0.130
	LTE Band 13_Ant 1	10M	QPSK	1	49	Front	10mm	DSI 6	23230	782	23.57	25.00	1.390	0	0.135	0.188
	LTE Band 13_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 6	23230	782	22.65	24.00	1.365	-0.03	0.123	0.168
	LTE Band 13_Ant 1	10M	QPSK	1	49	Back	10mm	DSI 6	23230	782	23.57	25.00	1.390	-0.06	0.235	0.327
	LTE Band 13_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 6	23230	782	22.65	24.00	1.365	-0.05	0.191	0.261
	LTE Band 13_Ant 1	10M	QPSK	1	49	Left Side	10mm	DSI 6	23230	782	23.57	25.00	1.390	-0.16	0.169	0.235
	LTE Band 13_Ant 1	10M	QPSK	25	25	Left Side	10mm	DSI 6	23230	782	22.65	24.00	1.365	0	0.148	0.202
	LTE Band 13_Ant 1	10M	QPSK	1	49	Right Side	10mm	DSI 6	23230	782	23.57	25.00	1.390	0	0.136	0.189
	LTE Band 13_Ant 1	10M	QPSK	25	25	Right Side	10mm	DSI 6	23230	782	22.65	24.00	1.365	0.01	0.111	0.151
	LTE Band 13_Ant 1	10M	QPSK	1	49	Top Side	10mm	DSI 6	23230	782	23.57	25.00	1.390	0	0.157	0.218
	LTE Band 13_Ant 1	10M	QPSK	25	25	Top Side	10mm	DSI 6	23230	782	22.65	24.00	1.365	0.07	0.123	0.168
	LTE Band 14_Ant 0	10M	QPSK	1	0	Front	10mm	DSI 6	23330	793	24.59	25.70	1.291	-0.08	0.260	0.336
	LTE Band 14_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 6	23330	793	23.63	24.70	1.279	0.01	0.219	0.280
	LTE Band 14_Ant 0	10M	QPSK	1	0	Back	10mm	DSI 6	23330	793	24.59	25.70	1.291	-0.03	0.280	0.362
	LTE Band 14_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 6	23330	793	23.63	24.70	1.279	-0.03	0.274	0.351
	LTE Band 14_Ant 0	10M	QPSK	1	0	Left Side	10mm	DSI 6	23230	793	24.59	25.70	1.291	-0.18	0.254	0.328
	LTE Band 14_Ant 0	10M	QPSK	25	25	Left Side	10mm	DSI 6	23330	793	23.63	24.70	1.279	-0.09	0.277	0.354
	LTE Band 14_Ant 0	10M	QPSK	1	0	Right Side	10mm	DSI 6	23330	793	24.59	25.70	1.291	-0.08	0.231	0.298
	LTE Band 14_Ant 0	10M	QPSK	25	25	Right Side	10mm	DSI 6	23330	793	23.63	24.70	1.279	-0.04	0.199	0.255
	LTE Band 14_Ant 0	10M	QPSK	1	0	Bottom Side	10mm	DSI 6	23330	793	24.59	25.70	1.291	0.1	0.145	0.187
	LTE Band 14_Ant 0	10M	QPSK	25	25	Bottom Side	10mm	DSI 6	23330	793	23.63	24.70	1.279	0.15	0.118	0.151
	LTE Band 14_Ant 1	10M	QPSK	1	0	Front	10mm	DSI 6	23330	793	23.66	25.00	1.361	0.18	0.107	0.146
	LTE Band 14_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 6	23330	793	22.74	24.00	1.337	-0.15	0.100	0.134
	LTE Band 14_Ant 1	10M	QPSK	1	0	Back	10mm	DSI 6	23330	793	23.66	25.00	1.361	-0.03	0.212	0.289
	LTE Band 14_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 6	23330	793	22.74	24.00	1.337	-0.05	0.184	0.246
	LTE Band 14_Ant 1	10M	QPSK	1	0	Left Side	10mm	DSI 6	23330	793	23.66	25.00	1.361	0.02	0.152	0.207
	LTE Band 14_Ant 1	10M	QPSK	25	25	Left Side	10mm	DSI 6	23330	793	22.74	24.00	1.337	-0.04	0.111	0.148
	LTE Band 14_Ant 1	10M	QPSK	1	0	Right Side	10mm	DSI 6	23330	793	23.66	25.00	1.361	0.06	0.114	0.155
	LTE Band 14_Ant 1	10M	QPSK	25	25	Right Side	10mm	DSI 6	23330	793	22.74	24.00	1.337	0	0.090	0.120
	LTE Band 14_Ant 1	10M	QPSK	1	0	Top Side	10mm	DSI 6	23330	793	23.66	25.00	1.361	0.08	0.126	0.172
	LTE Band 14_Ant 1	10M	QPSK	25	25	Top Side	10mm	DSI 6	23330	793	22.74	24.00	1.337	0.03	0.111	0.148



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	26590	1905	23.14	24.00	1.219	-0.09	0.478	0.583
	LTE Band 25_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 6	26590	1905	23.27	24.00	1.183	-0.04	0.482	0.570
	LTE Band 25_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	26590	1905	23.14	24.00	1.219	-0.08	0.570	0.695
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	26590	1905	23.27	24.00	1.183	-0.08	0.600	0.710
	LTE Band 25_Ant 2	20M	QPSK	1	99	Left Side	10mm	DSI 6	26590	1905	23.14	24.00	1.219	-0.08	0.076	0.093
	LTE Band 25_Ant 2	20M	QPSK	50	50	Left Side	10mm	DSI 6	26590	1905	23.27	24.00	1.183	-0.01	0.089	0.105
	LTE Band 25_Ant 2	20M	QPSK	1	99	Right Side	10mm	DSI 6	26590	1905	23.14	24.00	1.219	-0.13	0.242	0.295
	LTE Band 25_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 6	26590	1905	23.27	24.00	1.183	-0.09	0.253	0.299
	LTE Band 25_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	26590	1905	23.14	24.00	1.219	-0.05	0.649	0.791
	LTE Band 25_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	26590	1905	23.27	24.00	1.183	-0.06	0.691	0.817
	LTE Band 25_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	26140	1860	23.13	24.00	1.222	-0.04	0.590	0.721
	LTE Band 25_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	26340	1880	23.20	24.00	1.202	-0.1	0.633	0.761
	LTE Band 25_Ant 2	20M	QPSK	100	0	Bottom Side	10mm	DSI 6	26590	1905	23.25	24.00	1.189	-0.06	0.682	0.811
	LTE Band 25_Ant 0	20M	QPSK	1	99	Front	10mm	DSI 6	26340	1880	23.60	25.10	1.413	-0.04	0.271	0.383
	LTE Band 25_Ant 0	20M	QPSK	50	50	Front	10mm	DSI 6	26590	1905	22.96	24.50	1.426	-0.06	0.252	0.359
	LTE Band 25_Ant 0	20M	QPSK	1	99	Back	10mm	DSI 6	26340	1880	23.60	25.10	1.413	-0.08	0.447	0.631
	LTE Band 25_Ant 0	20M	QPSK	50	50	Back	10mm	DSI 6	26590	1905	22.96	24.50	1.426	-0.11	0.394	0.562
44	LTE Band 25_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	26340	1880	23.60	25.10	1.413	0.13	0.699	0.987
	LTE Band 25_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	26140	1860	23.46	24.50	1.271	0.13	0.587	0.746
	LTE Band 25_Ant 0	20M	QPSK	1	99	Left Side	10mm	DSI 6	26590	1905	23.58	24.50	1.236	0.15	0.569	0.703
	LTE Band 25_Ant 0	20M	QPSK	50	50	Left Side	10mm	DSI 6	26590	1905	22.96	24.50	1.426	0.14	0.539	0.768
	LTE Band 25_Ant 0	20M	QPSK	100	0	Left Side	10mm	DSI 6	26340	1880	22.87	24.50	1.455	0.15	0.565	0.822
	LTE Band 25_Ant 0	20M	QPSK	1	99	Right Side	10mm	DSI 6	26340	1880	23.60	25.10	1.413	-0.15	0.024	0.034
	LTE Band 25_Ant 0	20M	QPSK	50	50	Right Side	10mm	DSI 6	26590	1905	22.96	24.50	1.426	-0.15	0.022	0.031
	LTE Band 25_Ant 0	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	26340	1880	23.60	25.10	1.413	0.13	0.236	0.333
	LTE Band 25_Ant 0	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	26590	1905	22.96	24.50	1.426	0.11	0.182	0.259
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	DSI 6	26865	831.5	24.49	25.70	1.321	0	0.227	0.300
	LTE Band 26_Ant 0	15M	QPSK	36	20	Front	10mm	DSI 6	26865	831.5	23.67	24.70	1.268	-0.11	0.176	0.223
	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	DSI 6	26865	831.5	24.49	25.70	1.321	-0.11	0.305	0.403
	LTE Band 26_Ant 0	15M	QPSK	36	20	Back	10mm	DSI 6	26865	831.5	23.67	24.70	1.268	-0.03	0.251	0.318
45	LTE Band 26_Ant 0	15M	QPSK	1	0	Left Side	10mm	DSI 6	26865	831.5	24.49	25.70	1.321	-0.16	0.311	0.411
	LTE Band 26_Ant 0	15M	QPSK	36	20	Left Side	10mm	DSI 6	26865	831.5	23.67	24.70	1.268	-0.06	0.253	0.321
	LTE Band 26_Ant 0	15M	QPSK	1	0	Right Side	10mm	DSI 6	26865	831.5	24.49	25.70	1.321	0.02	0.177	0.234
	LTE Band 26_Ant 0	15M	QPSK	36	20	Right Side	10mm	DSI 6	26865	831.5	23.67	24.70	1.268	-0.03	0.144	0.183
	LTE Band 26_Ant 0	15M	QPSK	1	0	Bottom Side	10mm	DSI 6	26865	831.5	24.49	25.70	1.321	0.17	0.210	0.277
	LTE Band 26_Ant 0	15M	QPSK	36	20	Bottom Side	10mm	DSI 6	26865	831.5	23.67	24.70	1.268	0.11	0.173	0.219
	LTE Band 5B_Ant 0	10M	QPSK	1	0	Left Side	10mm	DSI 6	20575	841.5	25.43	25.70	1.064	-0.08	0.192	0.204
	LTE Band 26_Ant 1	15M	QPSK	1	0	Front	10mm	DSI 6	26865	831.5	23.49	25.00	1.416	-0.13	0.150	0.212
	LTE Band 26_Ant 1	15M	QPSK	36	0	Front	10mm	DSI 6	26865	831.5	22.64	24.00	1.368	-0.09	0.123	0.168
	LTE Band 26_Ant 1	15M	QPSK	1	0	Back	10mm	DSI 6	26865	831.5	23.49	25.00	1.416	-0.04	0.271	0.384
	LTE Band 26_Ant 1	15M	QPSK	36	0	Back	10mm	DSI 6	26865	831.5	22.64	24.00	1.368	-0.09	0.218	0.298
	LTE Band 26_Ant 1	15M	QPSK	1	0	Left Side	10mm	DSI 6	26865	831.5	23.49	25.00	1.416	-0.08	0.118	0.167
	LTE Band 26_Ant 1	15M	QPSK	36	0	Left Side	10mm	DSI 6	26865	831.5	22.64	24.00	1.368	-0.11	0.095	0.130
	LTE Band 26_Ant 1	15M	QPSK	1	0	Right Side	10mm	DSI 6	26865	831.5	23.49	25.00	1.416	-0.01	0.122	0.173
	LTE Band 26_Ant 1	15M	QPSK	36	0	Right Side	10mm	DSI 6	26865	831.5	22.64	24.00	1.368	0.05	0.096	0.131
	LTE Band 26_Ant 1	15M	QPSK	1	0	Top Side	10mm	DSI 6	26865	831.5	23.49	25.00	1.416	-0.09	0.184	0.261
	LTE Band 26_Ant 1	15M	QPSK	36	0	Top Side	10mm	DSI 6	26865	831.5	22.64	24.00	1.368	-0.01	0.148	0.202
	LTE Band 5B_Ant 1	10M	QPSK	1	0	Back	10mm	DSI 6	20600	844	24.34	25.00	1.164	0.09	0.234	0.272



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30_Ant 2	10M	QPSK	1	0	Front	10mm	DSI 6	27710	2310	23.15	24.20	1.274	-0.05	0.506	0.644
	LTE Band 30_Ant 2	10M	QPSK	25	25	Front	10mm	DSI 6	27710	2310	22.18	23.20	1.265	-0.07	0.409	0.517
46	LTE Band 30_Ant 2	10M	QPSK	1	0	Back	10mm	DSI 6	27710	2310	23.15	24.20	1.274	0.03	0.675	0.860
	LTE Band 30_Ant 2	10M	QPSK	25	25	Back	10mm	DSI 6	27710	2310	22.18	23.20	1.265	0.01	0.552	0.698
	LTE Band 30_Ant 2	10M	QPSK	50	0	Back	10mm	DSI 6	27710	2310	22.14	23.20	1.276	-0.06	0.549	0.701
	LTE Band 30_Ant 2	10M	QPSK	1	0	Left Side	10mm	DSI 6	27710	2310	23.15	24.20	1.274	-0.03	0.067	0.085
	LTE Band 30_Ant 2	10M	QPSK	25	25	Left Side	10mm	DSI 6	27710	2310	22.18	23.20	1.265	0.09	0.059	0.075
	LTE Band 30_Ant 2	10M	QPSK	1	0	Right Side	10mm	DSI 6	27710	2310	23.15	24.20	1.274	-0.06	0.320	0.408
	LTE Band 30_Ant 2	10M	QPSK	25	25	Right Side	10mm	DSI 6	27710	2310	22.18	23.20	1.265	0	0.258	0.326
	LTE Band 30_Ant 2	10M	QPSK	1	0	Bottom Side	10mm	DSI 6	27710	2310	23.15	24.20	1.274	-0.05	0.576	0.734
	LTE Band 30_Ant 2	10M	QPSK	25	25	Bottom Side	10mm	DSI 6	27710	2310	22.18	23.20	1.265	-0.1	0.475	0.601
	LTE Band 30_Ant 0	10M	QPSK	1	25	Front	10mm	DSI 6	27710	2310	23.88	25.70	1.521	-0.12	0.370	0.563
	LTE Band 30_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 6	27710	2310	22.96	24.70	1.493	-0.14	0.306	0.457
	LTE Band 30_Ant 0	10M	QPSK	1	25	Back	10mm	DSI 6	27710	2310	23.88	25.70	1.521	-0.12	0.509	0.774
	LTE Band 30_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 6	27710	2310	22.96	24.70	1.493	-0.1	0.458	0.684
	LTE Band 30_Ant 0	10M	QPSK	1	25	Left Side	10mm	DSI 6	27710	2310	23.88	25.70	1.521	-0.12	0.400	0.608
	LTE Band 30_Ant 0	10M	QPSK	25	25	Left Side	10mm	DSI 6	27710	2310	22.96	24.70	1.493	-0.05	0.313	0.467
	LTE Band 30_Ant 0	10M	QPSK	1	25	Right Side	10mm	DSI 6	27710	2310	23.88	25.70	1.521	0.01	0.040	0.061
	LTE Band 30_Ant 0	10M	QPSK	25	25	Right Side	10mm	DSI 6	27710	2310	22.96	24.70	1.493	0.01	0.031	0.046
	LTE Band 30_Ant 0	10M	QPSK	1	25	Bottom Side	10mm	DSI 6	27710	2310	23.88	25.70	1.521	0.04	0.301	0.458
	LTE Band 30_Ant 0	10M	QPSK	25	25	Bottom Side	10mm	DSI 6	27710	2310	22.96	24.70	1.493	-0.03	0.247	0.369



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	132322	1745	23.60	24.00	1.096	0.03	0.526	0.577
	LTE Band 66_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 6	132322	1745	22.87	24.00	1.297	0.01	0.553	0.717
	LTE Band 66_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	132322	1745	23.60	24.00	1.096	-0.16	0.607	0.666
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	132322	1745	22.87	24.00	1.297	-0.15	0.625	0.811
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	132072	1720	22.82	24.00	1.312	-0.13	0.631	0.828
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	132572	1770	22.76	24.00	1.330	-0.1	0.622	0.828
	LTE Band 66_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 6	132322	1745	22.82	24.00	1.312	-0.12	0.625	0.820
	LTE Band 66_Ant 2	20M	QPSK	1	99	Left Side	10mm	DSI 6	132322	1745	23.60	24.00	1.096	-0.1	0.140	0.154
	LTE Band 66_Ant 2	20M	QPSK	50	50	Left Side	10mm	DSI 6	132322	1745	22.87	24.00	1.297	-0.1	0.143	0.185
	LTE Band 66_Ant 2	20M	QPSK	1	99	Right Side	10mm	DSI 6	132322	1745	23.60	24.00	1.096	0.03	0.370	0.406
	LTE Band 66_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 6	132322	1745	22.87	24.00	1.297	0.03	0.384	0.498
	LTE Band 66_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	132322	1745	23.60	24.00	1.096	-0.12	0.600	0.658
	LTE Band 66_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	132322	1745	22.87	24.00	1.297	-0.12	0.617	0.800
	LTE Band 66_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	132072	1720	22.82	24.00	1.312	-0.03	0.578	0.758
47	LTE Band 66_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	132572	1770	22.76	24.00	1.330	-0.09	0.668	0.889
	LTE Band 66_Ant 2	20M	QPSK	100	0	Bottom Side	10mm	DSI 6	132322	1745	22.82	24.00	1.312	-0.13	0.619	0.812
	LTE Band 66_Ant 0	20M	QPSK	1	0	Front	10mm	DSI 6	132322	1745	23.54	25.10	1.432	-0.18	0.271	0.388
	LTE Band 66_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 6	132322	1745	22.97	24.50	1.422	-0.17	0.236	0.336
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 6	132322	1745	23.54	25.10	1.432	-0.06	0.588	0.842
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 6	132072	1720	23.52	25.10	1.439	-0.13	0.555	0.799
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 6	132572	1770	23.45	25.10	1.462	-0.08	0.572	0.836
	LTE Band 66_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 6	132322	1745	22.97	24.50	1.422	-0.17	0.548	0.779
	LTE Band 66_Ant 0	20M	QPSK	100	0	Back	10mm	DSI 6	132072	1720	22.95	24.50	1.429	-0.09	0.564	0.806
	LTE Band 66_Ant 0	20M	QPSK	1	0	Left Side	10mm	DSI 6	132322	1745	23.54	25.10	1.432	-0.06	0.485	0.695
	LTE Band 66_Ant 0	20M	QPSK	50	24	Left Side	10mm	DSI 6	132322	1745	22.97	24.50	1.422	-0.11	0.495	0.704
	LTE Band 66_Ant 0	20M	QPSK	1	0	Right Side	10mm	DSI 6	132322	1745	23.54	25.10	1.432	0.03	0.044	0.063
	LTE Band 66_Ant 0	20M	QPSK	50	24	Right Side	10mm	DSI 6	132322	1745	22.97	24.50	1.422	-0.06	0.040	0.057
	LTE Band 66_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	132322	1745	23.54	25.10	1.432	0.05	0.345	0.494
	LTE Band 66_Ant 0	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	132322	1745	22.97	24.50	1.422	0.06	0.312	0.444
	LTE Band 71_Ant 0	20M	QPSK	1	0	Front	10mm	DSI 6	133322	683	24.57	25.70	1.297	-0.12	0.214	0.278
	LTE Band 71_Ant 0	20M	QPSK	50	0	Front	10mm	DSI 6	133322	683	23.66	24.70	1.271	-0.11	0.180	0.229
48	LTE Band 71_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 6	133322	683	24.57	25.70	1.297	-0.11	0.301	0.390
	LTE Band 71_Ant 0	20M	QPSK	50	0	Back	10mm	DSI 6	133322	683	23.66	24.70	1.271	0	0.240	0.305
	LTE Band 71_Ant 0	20M	QPSK	1	0	Left Side	10mm	DSI 6	133322	683	24.57	25.70	1.297	-0.1	0.269	0.349
	LTE Band 71_Ant 0	20M	QPSK	50	0	Left Side	10mm	DSI 6	133322	683	23.66	24.70	1.271	-0.11	0.224	0.285
	LTE Band 71_Ant 0	20M	QPSK	1	0	Right Side	10mm	DSI 6	133322	683	24.57	25.70	1.297	-0.08	0.175	0.227
	LTE Band 71_Ant 0	20M	QPSK	50	0	Right Side	10mm	DSI 6	133322	683	23.66	24.70	1.271	-0.09	0.142	0.180
	LTE Band 71_Ant 0	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	133322	683	24.57	25.70	1.297	0.16	0.066	0.086
	LTE Band 71_Ant 0	20M	QPSK	50	0	Bottom Side	10mm	DSI 6	133322	683	23.66	24.70	1.271	0.12	0.053	0.067
	LTE Band 71_Ant 1	20M	QPSK	1	0	Front	10mm	DSI 6	133322	683	23.49	25.00	1.416	-0.11	0.102	0.144
	LTE Band 71_Ant 1	20M	QPSK	50	0	Front	10mm	DSI 6	133322	683	22.58	24.00	1.387	-0.07	0.092	0.128
	LTE Band 71_Ant 1	20M	QPSK	1	0	Back	10mm	DSI 6	133322	683	23.49	25.00	1.416	-0.15	0.160	0.227
	LTE Band 71_Ant 1	20M	QPSK	50	0	Back	10mm	DSI 6	133322	683	22.58	24.00	1.387	-0.07	0.138	0.191
	LTE Band 71_Ant 1	20M	QPSK	1	0	Left Side	10mm	DSI 6	133322	683	23.49	25.00	1.416	-0.07	0.233	0.330
	LTE Band 71_Ant 1	20M	QPSK	50	0	Left Side	10mm	DSI 6	133322	683	22.58	24.00	1.387	-0.07	0.205	0.284
	LTE Band 71_Ant 1	20M	QPSK	1	0	Right Side	10mm	DSI 6	133322	683	23.49	25.00	1.416	0.06	0.082	0.116
	LTE Band 71_Ant 1	20M	QPSK	50	0	Right Side	10mm	DSI 6	133322	683	22.58	24.00	1.387	-0.09	0.076	0.105
	LTE Band 71_Ant 1	20M	QPSK	1	0	Top Side	10mm	DSI 6	133322	683	23.49	25.00	1.416	-0.05	0.071	0.101
	LTE Band 71_Ant 1	20M	QPSK	50	0	Top Side	10mm	DSI 6	133322	683	22.58	24.00	1.387	0	0.061	0.085



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	49	Front	10mm	DSI 6	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.18	0.500	0.615
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	39750	2506	24.76	25.70	1.242	62.9	1.006	-0.12	0.426	0.532
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	40185	2549.5	24.82	25.70	1.225	62.9	1.006	-0.13	0.461	0.568
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 6	40620	2593	24.75	25.70	1.245	62.9	1.006	-0.02	0.492	0.616
	LTE Band 41_Ant 2	20M	QPSK	1	49	Front	10mm	DSI 6	41490	2680	24.68	25.70	1.265	62.9	1.006	-0.12	0.446	0.567
	LTE Band 41_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 6	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.18	0.379	0.451
49	LTE Band 41_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 6	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.16	0.738	0.907
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	39750	2506	24.76	25.70	1.242	62.9	1.006	0	0.521	0.651
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	40185	2549.5	24.82	25.70	1.225	62.9	1.006	-0.04	0.619	0.763
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 6	40620	2593	24.75	25.70	1.245	62.9	1.006	0.02	0.638	0.799
	LTE Band 41_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 6	41490	2680	24.68	25.70	1.265	62.9	1.006	-0.05	0.687	0.874
	LTE Band 41_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 6	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.05	0.510	0.607
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 6	39750	2506	23.90	24.70	1.202	62.9	1.006	-0.05	0.453	0.548
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 6	40620	2593	23.83	24.70	1.222	62.9	1.006	-0.03	0.567	0.697
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 6	41055	2636.5	23.87	24.70	1.211	62.9	1.006	-0.07	0.636	0.775
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 6	41490	2680	23.77	24.70	1.239	62.9	1.006	-0.14	0.621	0.774
	LTE Band 41_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 6	40185	2549.5	23.95	24.70	1.189	62.9	1.006	-0.02	0.562	0.672
	LTE Band 41_Ant 2	20M	QPSK	1	49	Left Side	10mm	DSI 6	41055	2636.5	24.83	25.70	1.222	62.9	1.006	0.02	0.102	0.125
	LTE Band 41_Ant 2	20M	QPSK	50	50	Left Side	10mm	DSI 6	40185	2549.5	23.97	24.70	1.183	62.9	1.006	0.01	0.066	0.079
	LTE Band 41_Ant 2	20M	QPSK	1	49	Right Side	10mm	DSI 6	41055	2636.5	24.83	25.70	1.222	62.9	1.006	0.1	0.338	0.415
	LTE Band 41_Ant 2	20M	QPSK	50	50	Right Side	10mm	DSI 6	40185	2549.5	23.97	24.70	1.183	62.9	1.006	0.03	0.232	0.276
	LTE Band 41_Ant 2	20M	QPSK	1	49	Bottom Side	10mm	DSI 6	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.05	0.676	0.831
	LTE Band 41_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	39750	2506	24.76	25.70	1.242	62.9	1.006	-0.1	0.597	0.746
	LTE Band 41_Ant 2	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	40185	2549.5	24.82	25.70	1.225	62.9	1.006	-0.16	0.601	0.740
	LTE Band 41_Ant 2	20M	QPSK	1	49	Bottom Side	10mm	DSI 6	40620	2593	24.75	25.70	1.245	62.9	1.006	-0.04	0.619	0.775
	LTE Band 41_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	41490	2680	24.68	25.70	1.265	62.9	1.006	-0.04	0.644	0.819
	LTE Band 41_Ant 2	20M	QPSK	50	50	Bottom Side	10mm	DSI 6	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.11	0.520	0.619
	LTE Band 41_Ant 2	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	39750	2506	23.90	24.70	1.202	62.9	1.006	-0.07	0.511	0.618
	LTE Band 41_Ant 2	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	40620	2593	23.83	24.70	1.222	62.9	1.006	-0.08	0.524	0.644
	LTE Band 41_Ant 2	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	41055	2636.5	23.87	24.70	1.211	62.9	1.006	-0.11	0.539	0.656
	LTE Band 41_Ant 2	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	41490	2680	23.77	24.70	1.239	62.9	1.006	-0.11	0.564	0.703
	LTE Band 41_Ant 2	20M	QPSK	100	0	Bottom Side	10mm	DSI 6	40185	2549.5	23.95	24.70	1.189	62.9	1.006	-0.08	0.521	0.623
	LTE Band 41C_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	41490	2680	25.05	25.70	1.161	62.9	1.006	-0.02	0.485	0.567
	LTE Band 41_HPUE_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 6	41055	2636.5	26.54	27.50	1.247	42.9	1.009	0.14	0.715	0.900
	LTE Band 41C_HPUE_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	41490	2680	27.44	27.50	1.014	42.9	1.009	-0.08	0.548	0.561
	LTE Band 41_Ant 0	20M	QPSK	1	49	Front	10mm	DSI 6	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.08	0.150	0.209
	LTE Band 41_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 6	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.07	0.114	0.155
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 6	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.06	0.113	0.157
	LTE Band 41_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 6	40185	2549.5	23.19	24.50	1.352	62.9	1.006	0.05	0.110	0.150
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.18	0.189	0.263
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	39750	2506	23.99	25.50	1.416	62.9	1.006	-0.1	0.216	0.308
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	40185	2549.5	24.01	25.50	1.409	62.9	1.006	-0.02	0.187	0.265
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	40620	2593	23.84	25.50	1.466	62.9	1.006	-0.16	0.165	0.243
	LTE Band 41_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	41490	2680	24.02	25.50	1.406	62.9	1.006	-0.09	0.186	0.263
	LTE Band 41_Ant 0	20M	QPSK	50	24	Left Side	10mm	DSI 6	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.1	0.168	0.229
	LTE Band 41_Ant 0	20M	QPSK	1	49	Right Side	10mm	DSI 6	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.03	0.007	0.010
	LTE Band 41_Ant 0	20M	QPSK	50	24	Right Side	10mm	DSI 6	40185	2549.5	23.19	24.50	1.352	62.9	1.006	0.06	0.009	0.012
	LTE Band 41_Ant 0	20M	QPSK	1	49	Bottom Side	10mm	DSI 6	41055	2636.5	24.09	25.50	1.384	62.9	1.006	0.15	0.071	0.099
	LTE Band 41_Ant 0	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	40185	2549.5	23.19	24.50	1.352	62.9	1.006	0.09	0.063	0.086
	LTE Band 41C_Ant 0	20M	QPSK	1	0	Left Side	10mm	DSI 6	41490	2680	24.76	25.50	1.186	62.9	1.006	0.15	0.202	0.241
	LTE Band 41_HPUE_Ant 0	20M	QPSK	1	49	Left Side	10mm	DSI 6	41055	2636.5	25.87	27.00	1.297	42.9	1.009	-0.01	0.210	0.275
	LTE Band 41C_HPUE_Ant 0	20M	QPSK	1	0	Left Side	10mm	DSI 6	41490	2680	26.98	27.00	1.005	42.9	1.009	-0.11	0.228	0.231



FCC SAR TEST REPORT

Report No. : FA001507-01A

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48_Ant 7	20M	QPSK	1	99	Front	10mm	DSI 6	56150	3641	22.38	23.30	1.236	62.9	1.006	-0.1	0.221	0.275
	LTE Band 48_Ant 7	20M	QPSK	50	24	Front	10mm	DSI 6	56150	3641	22.48	23.30	1.208	62.9	1.006	-0.16	0.229	0.278
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 6	56150	3641	22.38	23.30	1.236	62.9	1.006	0.12	0.592	0.736
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 6	55340	3560	22.22	23.30	1.282	62.9	1.006	0.08	0.642	0.828
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 6	55830	3609	22.31	23.30	1.256	62.9	1.006	0.05	0.689	0.871
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 6	56640	3690	22.22	23.30	1.282	62.9	1.006	-0.02	0.624	0.805
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 6	56150	3641	22.48	23.30	1.208	62.9	1.006	0.07	0.609	0.740
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 6	55340	3560	22.27	23.30	1.268	62.9	1.006	0.08	0.653	0.833
50	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 6	55830	3609	22.32	23.30	1.253	62.9	1.006	-0.1	0.716	0.903
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 6	56640	3690	22.23	23.30	1.279	62.9	1.006	-0.03	0.653	0.840
	LTE Band 48_Ant 7	20M	QPSK	100	0	Back	10mm	DSI 6	56150	3641	22.46	23.30	1.213	62.9	1.006	0	0.688	0.840
	LTE Band 48_Ant 7	20M	QPSK	1	99	Left Side	10mm	DSI 6	56150	3641	22.38	23.30	1.236	62.9	1.006	-0.11	0.266	0.331
	LTE Band 48_Ant 7	20M	QPSK	50	24	Left Side	10mm	DSI 6	56150	3641	22.48	23.30	1.208	62.9	1.006	-0.05	0.263	0.320
	LTE Band 48_Ant 7	20M	QPSK	1	99	Right Side	10mm	DSI 6	56150	3641	22.38	23.30	1.236	62.9	1.006	-0.07	0.033	0.041
	LTE Band 48_Ant 7	20M	QPSK	50	24	Right Side	10mm	DSI 6	56150	3641	22.48	23.30	1.208	62.9	1.006	-0.04	0.034	0.041
	LTE Band 48_Ant 7	20M	QPSK	1	99	Bottom Side	10mm	DSI 6	56150	3641	22.38	23.30	1.236	62.9	1.006	-0.11	0.336	0.418
	LTE Band 48_Ant 7	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	56150	3641	22.48	23.30	1.208	62.9	1.006	-0.12	0.348	0.423
	LTE Band 48_Ant 2	20M	QPSK	1	0	Front	10mm	DSI 6	56640	3690	23.01	24.10	1.285	62.9	1.006	-0.07	0.245	0.317
	LTE Band 48_Ant 2	20M	QPSK	50	24	Front	10mm	DSI 6	56640	3690	22.86	24.10	1.330	62.9	1.006	-0.13	0.263	0.352
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	56640	3690	23.01	24.10	1.285	62.9	1.006	-0.07	0.615	0.795
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	55340	3560	22.8	24.10	1.349	62.9	1.006	-0.11	0.515	0.699
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	55830	3609	22.82	24.10	1.343	62.9	1.006	-0.11	0.518	0.700
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 6	56150	3641	22.88	24.10	1.324	62.9	1.006	-0.14	0.540	0.719
	LTE Band 48_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 6	56640	3690	22.86	24.10	1.330	62.9	1.006	-0.1	0.609	0.815
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 6	55340	3560	22.71	24.10	1.377	62.9	1.006	-0.1	0.533	0.738
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 6	55830	3609	22.86	24.10	1.330	62.9	1.006	-0.14	0.544	0.728
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 6	56150	3641	22.84	24.10	1.337	62.9	1.006	-0.11	0.565	0.760
	LTE Band 48_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 6	56640	3690	22.85	24.10	1.334	62.9	1.006	-0.17	0.615	0.825
	LTE Band 48_Ant 2	20M	QPSK	1	0	Left Side	10mm	DSI 6	56640	3690	23.01	24.10	1.285	62.9	1.006	-0.1	0.058	0.075
	LTE Band 48_Ant 2	20M	QPSK	50	24	Left Side	10mm	DSI 6	56640	3690	22.86	24.10	1.330	62.9	1.006	-0.03	0.057	0.076
	LTE Band 48_Ant 2	20M	QPSK	1	0	Right Side	10mm	DSI 6	56640	3690	23.01	24.10	1.285	62.9	1.006	0.04	0.448	0.579
	LTE Band 48_Ant 2	20M	QPSK	50	24	Right Side	10mm	DSI 6	56640	3690	22.86	24.10	1.330	62.9	1.006	0.04	0.467	0.625
	LTE Band 48_Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI 6	55340	3560	22.71	24.10	1.377	62.9	1.006	-0.11	0.316	0.438
	LTE Band 48_Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI 6	55830	3609	22.86	24.10	1.330	62.9	1.006	0.07	0.355	0.475
	LTE Band 48_Ant 2	20M	QPSK	50	0	Right Side	10mm	DSI 6	56150	3641	22.84	24.10	1.337	62.9	1.006	0.11	0.384	0.516
	LTE Band 48_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	56640	3690	23.01	24.10	1.285	62.9	1.006	0.16	0.496	0.641
	LTE Band 48_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	55340	3560	22.8	24.10	1.349	62.9	1.006	0.02	0.435	0.590
	LTE Band 48_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	55830	3609	22.82	24.10	1.343	62.9	1.006	0.06	0.462	0.624
	LTE Band 48_Ant 2	20M	QPSK	1	0	Bottom Side	10mm	DSI 6	56150	3641	22.88	24.10	1.324	62.9	1.006	0.13	0.485	0.646
	LTE Band 48_Ant 2	20M	QPSK	50	24	Bottom Side	10mm	DSI 6	56640	3690	22.86	24.10	1.330	62.9	1.006	0.12	0.498	0.667
	LTE Band 48_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	DSI 6	55340	3560	22.71	24.10	1.377	62.9	1.006	0.1	0.443	0.614
	LTE Band 48_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	DSI 6	55830	3609	22.86	24.10	1.330	62.9	1.006	0.11	0.470	0.629
	LTE Band 48_Ant 2	20M	QPSK	50	0	Bottom Side	10mm	DSI 6	56150	3641	22.84	24.10	1.337	62.9	1.006	0.06	0.489	0.658

<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 0	20M	BPSK	1	1	Front	10mm	DSI 6	167300	836.5	24.24	25.00	1.191	-0.15	0.118	0.141
	FR1 n5_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 6	167300	836.5	24.09	25.00	1.233	-0.12	0.117	0.144
	FR1 n5_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 6	167300	836.5	24.24	25.00	1.191	-0.03	0.241	0.287
	FR1 n5_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 6	167300	836.5	24.09	25.00	1.233	-0.01	0.259	0.319
	FR1 n5_Ant 0	20M	BPSK	1	1	Left Side	10mm	DSI 6	167300	836.5	24.24	25.00	1.191	-0.19	0.166	0.198
	FR1 n5_Ant 0	20M	BPSK	50	28	Left Side	10mm	DSI 6	167300	836.5	24.09	25.00	1.233	-0.14	0.171	0.211
	FR1 n5_Ant 0	20M	BPSK	1	1	Right Side	10mm	DSI 6	167300	836.5	24.24	25.00	1.191	-0.04	0.081	0.096
	FR1 n5_Ant 0	20M	BPSK	50	28	Right Side	10mm	DSI 6	167300	836.5	24.09	25.00	1.233	-0.08	0.078	0.096
	FR1 n5_Ant 0	20M	BPSK	1	1	Bottom Side	10mm	DSI 6	167300	836.5	24.24	25.00	1.191	-0.03	0.152	0.181
	FR1 n5_Ant 0	20M	BPSK	50	28	Bottom Side	10mm	DSI 6	167300	836.5	24.09	25.00	1.233	-0.1	0.162	0.200
	FR1 n5_Ant 1	20M	BPSK	1	1	Front	10mm	DSI 6	167300	836.5	23.51	25.00	1.409	-0.1	0.153	0.216
	FR1 n5_Ant 1	20M	BPSK	50	28	Front	10mm	DSI 6	167300	836.5	23.30	25.00	1.479	-0.01	0.142	0.210
	FR1 n5_Ant 1	20M	BPSK	1	1	Back	10mm	DSI 6	167300	836.5	23.51	25.00	1.409	-0.1	0.256	0.361
51	FR1 n5_Ant 1	20M	BPSK	50	28	Back	10mm	DSI 6	167300	836.5	23.30	25.00	1.479	-0.06	0.253	0.374
	FR1 n5_Ant 1	20M	BPSK	1	1	Left Side	10mm	DSI 6	167300	836.5	23.51	25.00	1.409	0.03	0.118	0.166
	FR1 n5_Ant 1	20M	BPSK	50	28	Left Side	10mm	DSI 6	167300	836.5	23.30	25.00	1.479	0.03	0.098	0.145
	FR1 n5_Ant 1	20M	BPSK	1	1	Right Side	10mm	DSI 6	167300	836.5	23.51	25.00	1.409	0.05	0.122	0.172
	FR1 n5_Ant 1	20M	BPSK	50	28	Right Side	10mm	DSI 6	167300	836.5	23.30	25.00	1.479	0.06	0.108	0.160
	FR1 n5_Ant 1	20M	BPSK	1	1	Top Side	10mm	DSI 6	167300	836.5	23.51	25.00	1.409	0.05	0.187	0.264
	FR1 n5_Ant 1	20M	BPSK	50	28	Top Side	10mm	DSI 6	167300	836.5	23.30	25.00	1.479	0.06	0.183	0.271
	FR1 n12_Ant 0	15M	BPSK	1	1	Front	10mm	DSI 6	141500	707.5	23.91	24.70	1.199	-0.06	0.093	0.112
	FR1 n12_Ant 0	15M	BPSK	36	22	Front	10mm	DSI 6	141500	707.5	23.67	24.70	1.268	-0.06	0.083	0.105
	FR1 n12_Ant 0	15M	BPSK	1	1	Back	10mm	DSI 6	141500	707.5	23.91	24.70	1.199	-0.03	0.119	0.143
	FR1 n12_Ant 0	15M	BPSK	36	22	Back	10mm	DSI 6	141500	707.5	23.67	24.70	1.268	0.08	0.117	0.148
	FR1 n12_Ant 0	15M	BPSK	1	1	Left Side	10mm	DSI 6	141500	707.5	23.91	24.70	1.199	0.06	0.143	0.172
	FR1 n12_Ant 0	15M	BPSK	36	22	Left Side	10mm	DSI 6	141500	707.5	23.67	24.70	1.268	-0.02	0.126	0.160
	FR1 n12_Ant 0	15M	BPSK	1	1	Right Side	10mm	DSI 6	141500	707.5	23.91	24.70	1.199	0.05	0.092	0.110
	FR1 n12_Ant 0	15M	BPSK	36	22	Right Side	10mm	DSI 6	141500	707.5	23.67	24.70	1.268	-0.02	0.072	0.091
	FR1 n12_Ant 0	15M	BPSK	1	1	Bottom Side	10mm	DSI 6	141500	707.5	23.91	24.70	1.199	0.09	0.031	0.037
	FR1 n12_Ant 0	15M	BPSK	36	22	Bottom Side	10mm	DSI 6	141500	707.5	23.67	24.70	1.268	0.05	0.029	0.037
	FR1 n12_Ant 1	15M	BPSK	1	1	Front	10mm	DSI 6	141500	707.5	22.16	23.00	1.213	-0.12	0.107	0.130
	FR1 n12_Ant 1	15M	BPSK	36	0	Front	10mm	DSI 6	141500	707.5	22.07	23.00	1.239	-0.05	0.107	0.133
	FR1 n12_Ant 1	15M	BPSK	1	1	Back	10mm	DSI 6	141500	707.5	22.16	23.00	1.213	-0.17	0.152	0.184
	FR1 n12_Ant 1	15M	BPSK	36	0	Back	10mm	DSI 6	141500	707.5	22.07	23.00	1.239	-0.16	0.143	0.177
	FR1 n12_Ant 1	15M	BPSK	1	1	Left Side	10mm	DSI 6	141500	707.5	22.16	23.00	1.213	0	0.190	0.231
52	FR1 n12_Ant 1	15M	BPSK	36	0	Left Side	10mm	DSI 6	141500	707.5	22.07	23.00	1.239	0.05	0.187	0.232
	FR1 n12_Ant 1	15M	BPSK	1	1	Right Side	10mm	DSI 6	141500	707.5	22.16	23.00	1.213	-0.04	0.099	0.120
	FR1 n12_Ant 1	15M	BPSK	36	0	Right Side	10mm	DSI 6	141500	707.5	22.07	23.00	1.239	-0.09	0.103	0.128
	FR1 n12_Ant 1	15M	BPSK	1	1	Top side	10mm	DSI 6	141500	707.5	22.16	23.00	1.213	0.02	0.074	0.090
	FR1 n12_Ant 1	15M	BPSK	36	0	Top side	10mm	DSI 6	141500	707.5	22.07	23.00	1.239	-0.07	0.076	0.094



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n25_Ant 2	20M	BPSK	1	104	Front	10mm	DSI 6	376500	1882.5	23.83	24.3	1.114	-0.15	0.477	0.532
	FR1 n25_Ant 2	20M	BPSK	50	56	Front	10mm	DSI 6	376500	1882.5	23.77	24.3	1.130	-0.02	0.476	0.538
	FR1 n25_Ant 2	20M	BPSK	1	104	Back	10mm	DSI 6	376500	1882.5	23.83	24.3	1.114	-0.04	0.607	0.676
	FR1 n25_Ant 2	20M	BPSK	50	56	Back	10mm	DSI 6	376500	1882.5	23.77	24.3	1.130	-0.03	0.600	0.678
	FR1 n25_Ant 2	20M	BPSK	1	104	Left Side	10mm	DSI 6	376500	1882.5	23.83	24.3	1.114	-0.03	0.122	0.136
	FR1 n25_Ant 2	20M	BPSK	50	56	Left Side	10mm	DSI 6	376500	1882.5	23.77	24.3	1.130	-0.05	0.119	0.134
	FR1 n25_Ant 2	20M	BPSK	1	104	Right Side	10mm	DSI 6	376500	1882.5	23.83	24.3	1.114	0.08	0.285	0.318
	FR1 n25_Ant 2	20M	BPSK	50	56	Right Side	10mm	DSI 6	376500	1882.5	23.77	24.3	1.130	0.09	0.271	0.306
	FR1 n25_Ant 2	20M	BPSK	1	104	Bottom Side	10mm	DSI 6	376500	1882.5	23.83	24.3	1.114	-0.09	0.670	0.747
	FR1 n25_Ant 2	20M	BPSK	50	56	Bottom Side	10mm	DSI 6	376500	1882.5	23.77	24.3	1.130	-0.08	0.672	0.759
	FR1 n25_Ant 2	20M	BPSK	50	56	Bottom Side	10mm	DSI 6	372000	1860	23.65	24.3	1.161	0.06	0.611	0.710
	FR1 n25_Ant 2	20M	BPSK	50	56	Bottom Side	10mm	DSI 6	381000	1905	23.76	24.3	1.132	-0.03	0.670	0.759
	FR1 n25_Ant 0	20M	BPSK	1	53	Front	10mm	DSI 6	376500	1882.5	23.83	25.50	1.469	0.17	0.262	0.385
	FR1 n25_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 6	376500	1882.5	23.81	25.50	1.476	0.12	0.248	0.366
53	FR1 n25_Ant 0	20M	BPSK	1	53	Back	10mm	DSI 6	376500	1882.5	23.83	25.50	1.469	-0.08	0.523	0.768
	FR1 n25_Ant 0	20M	BPSK	1	104	Back	10mm	DSI 6	372000	1860	23.82	25.50	1.472	-0.15	0.492	0.724
	FR1 n25_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 6	381000	1905	23.82	25.50	1.472	-0.16	0.503	0.741
	FR1 n25_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 6	376500	1882.5	23.81	25.50	1.476	-0.09	0.520	0.767
	FR1 n25_Ant 0	20M	BPSK	1	53	Left Side	10mm	DSI 6	376500	1882.5	23.83	25.50	1.469	-0.12	0.470	0.690
	FR1 n25_Ant 0	20M	BPSK	50	28	Left Side	10mm	DSI 6	376500	1882.5	23.81	25.50	1.476	-0.05	0.475	0.701
	FR1 n25_Ant 0	20M	BPSK	1	53	Right Side	10mm	DSI 6	376500	1882.5	23.83	25.50	1.469	0.15	0.028	0.041
	FR1 n25_Ant 0	20M	BPSK	50	28	Right Side	10mm	DSI 6	376500	1882.5	23.81	25.50	1.476	0.04	0.028	0.041
	FR1 n25_Ant 0	20M	BPSK	1	53	Bottom Side	10mm	DSI 6	376500	1882.5	23.83	25.50	1.469	0.02	0.194	0.285
	FR1 n25_Ant 0	20M	BPSK	50	28	Bottom Side	10mm	DSI 6	376500	1882.5	23.81	25.50	1.476	0.12	0.204	0.301



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n41_Ant 2	100M	BPSK	1	137	Front	10mm	DSI 6	518598	2592.99	24.70	25.70	1.259	-0.1	0.168	0.279
	FR1 n41_Ant 2	100M	BPSK	135	69	Front	10mm	DSI 6	518598	2592.99	24.63	25.70	1.279	-0.04	0.175	0.296
	FR1 n41_Ant 2	100M	BPSK	1	137	Back	10mm	DSI 6	518598	2592.99	24.70	25.70	1.259	-0.05	0.270	0.449
	FR1 n41_Ant 2	100M	BPSK	135	69	Back	10mm	DSI 6	518598	2592.99	24.63	25.70	1.279	-0.1	0.252	0.426
	FR1 n41_Ant 2	100M	BPSK	1	137	Left Side	10mm	DSI 6	518598	2592.99	24.70	25.70	1.259	-0.08	0.048	0.080
	FR1 n41_Ant 2	100M	BPSK	135	69	Left Side	10mm	DSI 6	518598	2592.99	24.63	25.70	1.279	0.06	0.043	0.073
	FR1 n41_Ant 2	100M	BPSK	1	137	Right Side	10mm	DSI 6	518598	2592.99	24.70	25.70	1.259	-0.09	0.125	0.208
	FR1 n41_Ant 2	100M	BPSK	135	69	Right Side	10mm	DSI 6	518598	2592.99	24.63	25.70	1.279	-0.06	0.125	0.211
	FR1 n41_Ant 2	100M	BPSK	1	137	Bottom Side	10mm	DSI 6	518598	2592.99	24.70	25.70	1.259	-0.15	0.247	0.410
	FR1 n41_Ant 2	100M	BPSK	135	69	Bottom Side	10mm	DSI 6	518598	2592.99	24.63	25.70	1.279	-0.05	0.252	0.426
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Front	10mm	DSI 6	518598	2592.99	25.38	25.90	1.127	0.14	0.125	0.186
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Front	10mm	DSI 6	518598	2592.99	25.45	25.90	1.109	-0.17	0.143	0.209
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Back	10mm	DSI 6	518598	2592.99	25.38	25.90	1.127	-0.06	0.519	0.772
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Back	10mm	DSI 6	518598	2592.99	25.45	25.90	1.109	-0.08	0.552	0.808
	FR1 n41_HPUE_Ant 5	100M	BPSK	270	0	Back	10mm	DSI 6	518598	2592.99	25.40	25.90	1.122	-0.1	0.545	0.807
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Left Side	10mm	DSI 6	518598	2592.99	25.38	25.90	1.127	0.15	0.594	0.884
54	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Left Side	10mm	DSI 6	518598	2592.99	25.45	25.90	1.109	0.11	0.624	0.914
	FR1 n41_HPUE_Ant 5	100M	BPSK	270	0	Left Side	10mm	DSI 6	518598	2592.99	25.40	25.90	1.122	0.17	0.600	0.889
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Right Side	10mm	DSI 6	518598	2592.99	25.38	25.90	1.127	0.06	0.020	0.030
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Right Side	10mm	DSI 6	518598	2592.99	25.45	25.90	1.109	0.02	0.016	0.023
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Bottom Side	10mm	DSI 6	518598	2592.99	25.38	25.90	1.127	0.1	0.051	0.076
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Bottom Side	10mm	DSI 6	518598	2592.99	25.45	25.90	1.109	0.12	0.041	0.060
	FR1 n41_Ant 0	100M	BPSK	1	271	Front	10mm	DSI 6	518598	2592.99	24.80	25.50	1.175	0.19	0.086	0.133
	FR1 n41_Ant 0	100M	BPSK	135	69	Front	10mm	DSI 6	518598	2592.99	24.60	25.50	1.230	0.13	0.103	0.167
	FR1 n41_Ant 0	100M	BPSK	1	271	Back	10mm	DSI 6	518598	2592.99	24.80	25.50	1.175	0.14	0.131	0.203
	FR1 n41_Ant 0	100M	BPSK	135	69	Back	10mm	DSI 6	518598	2592.99	24.60	25.50	1.230	0.17	0.170	0.276
	FR1 n41_Ant 0	100M	BPSK	1	271	Left Side	10mm	DSI 6	518598	2592.99	24.80	25.50	1.175	0.17	0.019	0.029
	FR1 n41_Ant 0	100M	BPSK	135	69	Left Side	10mm	DSI 6	518598	2592.99	24.60	25.50	1.230	0.09	0.050	0.081
	FR1 n41_Ant 0	100M	BPSK	1	271	Right Side	10mm	DSI 6	518598	2592.99	24.80	25.50	1.175	0.14	0.002	0.002
	FR1 n41_Ant 0	100M	BPSK	135	69	Right Side	10mm	DSI 6	518598	2592.99	24.60	25.50	1.230	0.01	0.001	0.002
	FR1 n41_Ant 0	100M	BPSK	1	271	Bottom Side	10mm	DSI 6	518598	2592.99	24.80	25.50	1.175	0.12	0.072	0.112
	FR1 n41_Ant 0	100M	BPSK	135	69	Bottom Side	10mm	DSI 6	518598	2592.99	24.60	25.50	1.230	0.07	0.107	0.174



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant 2	20M	BPSK	1	1	Front	10mm	DSI 6	349000	1745	23.84	24.30	1.112	0.06	0.587	0.653
	FR1 n66_Ant 2	20M	BPSK	50	0	Front	10mm	DSI 6	349000	1745	23.83	24.30	1.114	0.08	0.563	0.627
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 6	349000	1745	23.84	24.30	1.112	-0.15	0.636	0.707
	FR1 n66_Ant 2	20M	BPSK	50	0	Back	10mm	DSI 6	349000	1745	23.83	24.30	1.114	-0.16	0.626	0.698
	FR1 n66_Ant 2	20M	BPSK	1	1	Left Side	10mm	DSI 6	349000	1745	23.84	24.30	1.112	-0.01	0.110	0.122
	FR1 n66_Ant 2	20M	BPSK	50	0	Left Side	10mm	DSI 6	349000	1745	23.83	24.30	1.114	0.04	0.114	0.127
	FR1 n66_Ant 2	20M	BPSK	1	1	Right Side	10mm	DSI 6	349000	1745	23.84	24.30	1.112	-0.03	0.412	0.458
	FR1 n66_Ant 2	20M	BPSK	50	0	Right Side	10mm	DSI 6	349000	1745	23.83	24.30	1.114	-0.11	0.372	0.415
	FR1 n66_Ant 2	20M	BPSK	1	1	Bottom Side	10mm	DSI 6	349000	1745	23.84	24.30	1.112	-0.08	0.625	0.695
55	FR1 n66_Ant 2	20M	BPSK	50	0	Bottom Side	10mm	DSI 6	349000	1745	23.83	24.30	1.114	0.01	0.647	0.721
	FR1 n66_Ant 2	20M	BPSK	50	0	Bottom Side	10mm	DSI 6	344000	1720	23.75	24.30	1.135	-0.11	0.607	0.689
	FR1 n66_Ant 2	20M	BPSK	50	0	Bottom Side	10mm	DSI 6	354000	1770	23.74	24.30	1.138	-0.11	0.623	0.709
	FR1 n66_Ant 0	20M	BPSK	1	1	Front	10mm	DSI 6	349000	1745	23.87	25.50	1.455	-0.08	0.167	0.243
	FR1 n66_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 6	349000	1745	23.78	25.50	1.486	0.08	0.162	0.241
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 6	349000	1745	23.87	25.50	1.455	0	0.399	0.581
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 6	344000	1720	23.85	25.50	1.462	-0.14	0.454	0.664
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 6	354000	1770	23.84	25.50	1.466	-0.05	0.450	0.659
	FR1 n66_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 6	349000	1745	23.78	25.50	1.486	0.01	0.383	0.569
	FR1 n66_Ant 0	20M	BPSK	1	1	Left Side	10mm	DSI 6	349000	1745	23.87	25.50	1.455	0	0.378	0.550
	FR1 n66_Ant 0	20M	BPSK	50	28	Left Side	10mm	DSI 6	349000	1745	23.78	25.50	1.486	-0.01	0.366	0.544
	FR1 n66_Ant 0	20M	BPSK	1	1	Right Side	10mm	DSI 6	349000	1745	23.87	25.50	1.455	0.09	0.027	0.039
	FR1 n66_Ant 0	20M	BPSK	50	28	Right Side	10mm	DSI 6	349000	1745	23.78	25.50	1.486	0.03	0.026	0.039
	FR1 n66_Ant 0	20M	BPSK	1	1	Bottom Side	10mm	DSI 6	349000	1745	23.87	25.50	1.455	0.09	0.218	0.317
	FR1 n66_Ant 0	20M	BPSK	50	28	Bottom Side	10mm	DSI 6	349000	1745	23.78	25.50	1.486	0.16	0.202	0.300



FCC SAR TEST REPORT

Report No. : FA001507-01A

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n71_Ant 0	20M	BPSK	1	53	Front	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	-0.11	0.103	0.138
	FR1 n71_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	0.11	0.124	0.166
	FR1 n71_Ant 0	20M	BPSK	1	53	Back	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	-0.18	0.119	0.159
	FR1 n71_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	-0.15	0.152	0.203
	FR1 n71_Ant 0	20M	BPSK	1	53	Left Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	0	0.086	0.115
56	FR1 n71_Ant 0	20M	BPSK	50	28	Left Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	-0.06	0.196	0.262
	FR1 n71_Ant 0	20M	BPSK	1	53	Right Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	-0.07	0.052	0.070
	FR1 n71_Ant 0	20M	BPSK	50	28	Right Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	0.09	0.112	0.150
	FR1 n71_Ant 0	20M	BPSK	1	53	Bottom Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	0.04	0.025	0.033
	FR1 n71_Ant 0	20M	BPSK	50	28	Bottom Side	10mm	DSI 6	136100	680.5	24.44	25.70	1.337	0.15	0.055	0.074
	FR1 n71_Ant 1	20M	BPSK	1	1	Front	10mm	DSI 6	136100	680.5	23.43	25.00	1.435	-0.01	0.077	0.111
	FR1 n71_Ant 1	20M	BPSK	50	28	Front	10mm	DSI 6	136100	680.5	23.30	25.00	1.479	-0.07	0.100	0.148
	FR1 n71_Ant 1	20M	BPSK	1	1	Back	10mm	DSI 6	136100	680.5	23.43	25.00	1.435	-0.17	0.144	0.207
	FR1 n71_Ant 1	20M	BPSK	50	28	Back	10mm	DSI 6	136100	680.5	23.30	25.00	1.479	-0.02	0.155	0.229
	FR1 n71_Ant 1	20M	BPSK	1	1	Left Side	10mm	DSI 6	136100	680.5	23.43	25.00	1.435	0.03	0.125	0.179
	FR1 n71_Ant 1	20M	BPSK	50	28	Left Side	10mm	DSI 6	136100	680.5	23.30	25.00	1.479	0	0.170	0.251
	FR1 n71_Ant 1	20M	BPSK	1	1	Right Side	10mm	DSI 6	136100	680.5	23.43	25.00	1.435	0.04	0.055	0.079
	FR1 n71_Ant 1	20M	BPSK	50	28	Right Side	10mm	DSI 6	136100	680.5	23.30	25.00	1.479	-0.01	0.069	0.102
	FR1 n71_Ant 1	20M	BPSK	1	1	Top Side	10mm	DSI 6	136100	680.5	23.43	25.00	1.435	0.11	0.072	0.103
	FR1 n71_Ant 1	20M	BPSK	50	28	Top Side	10mm	DSI 6	136100	680.5	23.30	25.00	1.479	0.15	0.084	0.124
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Front	10mm	DSI 6	656000	3840	25.26	26.50	1.330	0.01	0.215	0.378
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Front	10mm	DSI 6	656000	3840	25.11	26.50	1.377	-0.1	0.202	0.367
57	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Back	10mm	DSI 6	656000	3840	25.26	26.50	1.330	-0.12	0.478	0.839
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Back	10mm	DSI 6	656000	3840	25.11	26.50	1.377	-0.12	0.435	0.791
	FR1 n77_HPUE_Ant 7	100M	BPSK	270	0	Back	10mm	DSI 6	656000	3840	24.56	26.00	1.393	-0.05	0.406	0.747
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Left Side	10mm	DSI 6	656000	3840	25.26	26.50	1.330	0.1	0.394	0.692
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Left Side	10mm	DSI 6	656000	3840	25.11	26.50	1.377	0.11	0.385	0.700
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Right Side	10mm	DSI 6	656000	3840	25.26	26.50	1.330	0.19	0.024	0.042
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Right Side	10mm	DSI 6	656000	3840	25.11	26.50	1.377	-0.19	0.020	0.037
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Bottom Side	10mm	DSI 6	656000	3840	25.26	26.50	1.330	-0.05	0.164	0.288
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Bottom Side	10mm	DSI 6	656000	3840	25.11	26.50	1.377	-0.02	0.163	0.296
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Front	10mm	DSI 6	656000	3840	24.64	26.00	1.368	0.04	0.162	0.292
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Front	10mm	DSI 6	656000	3840	24.48	26.00	1.419	-0.11	0.148	0.277
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Back	10mm	DSI 6	656000	3840	24.64	26.00	1.368	-0.05	0.416	0.751
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Back	10mm	DSI 6	656000	3840	24.48	26.00	1.419	-0.06	0.160	0.300
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Left Side	10mm	DSI 6	656000	3840	24.64	26.00	1.368	0.11	0.024	0.044
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Left Side	10mm	DSI 6	656000	3840	24.48	26.00	1.419	-0.16	0.024	0.044
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Right Side	10mm	DSI 6	656000	3840	24.64	26.00	1.368	0.1	0.170	0.307
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Right Side	10mm	DSI 6	656000	3840	24.48	26.00	1.419	0.1	0.151	0.283
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Bottom Side	10mm	DSI 6	656000	3840	24.64	26.00	1.368	0.14	0.124	0.224
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Bottom Side	10mm	DSI 6	656000	3840	24.48	26.00	1.419	0.1	0.089	0.167

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	3	1	2412	19.70	20.00	1.072	100	1.000	-0.12	0.175	0.188
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	3	1	2412	19.70	20.00	1.072	100	1.000	-0.18	0.258	0.276
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4	3	1	2412	19.70	20.00	1.072	100	1.000	0.16	0.166	0.178
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4	3	1	2412	19.70	20.00	1.072	100	1.000	0	0.203	0.218
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 3	3	11	2462	19.60	20.00	1.096	100	1.000	0.1	0.128	0.140
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 3	3	11	2462	19.60	20.00	1.096	100	1.000	-0.1	0.301	0.330
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 3	3	11	2462	19.60	20.00	1.096	100	1.000	-0.15	0.217	0.238
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+3(4)	3	6	2437	19.90	20.00	1.023	100	1.000	0.02	0.216	0.221
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+3(3)	3	6	2437	19.40	20.00	1.148	100	1.000	0.02	0.080	0.092
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	3	6	2437	19.90	20.00	1.023	100	1.000	-0.05	0.211	0.216
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	3	6	2437	19.40	20.00	1.148	100	1.000	-0.05	0.324	0.372
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	3	1	2412	19.60	20.00	1.096	100	1.000	-0.18	0.238	0.261
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	3	1	2412	19.40	20.00	1.148	100	1.000	-0.18	0.347	0.398
58	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	3	11	2462	19.70	20.00	1.072	100	1.000	-0.06	0.215	0.230
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	3	11	2462	19.50	20.00	1.122	100	1.000	-0.06	0.357	0.401
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	Ant 4+3(3)	3	6	2437	19.40	20.00	1.148	100	1.000	-0.15	0.226	0.259
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 4+3(4)	3	6	2437	19.90	20.00	1.023	100	1.000	0.14	0.110	0.113
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 4+3(4)	3	6	2437	19.90	20.00	1.023	100	1.000	-0.05	0.230	0.235

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	3	46	5230	17.10	17.50	1.096	95.88	1.043	-0.16	0.101	0.116
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	3	46	5230	17.10	17.50	1.096	95.88	1.043	-0.05	0.186	0.213
59	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4	3	46	5230	17.10	17.50	1.096	95.88	1.043	0.03	0.314	0.359
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4	3	38	5190	16.60	17.00	1.096	95.88	1.043	0.12	0.299	0.342
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4	3	46	5230	17.10	17.50	1.096	95.88	1.043	0.04	0.186	0.213
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	3	46	5230	16.90	17.50	1.148	95.3	1.049	0.12	0.045	0.054
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	3	46	5230	16.90	17.50	1.148	95.3	1.049	-0.01	0.079	0.095
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	Ant 3	3	46	5230	16.90	17.50	1.148	95.3	1.049	0.06	0.126	0.152
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(4)	3	46	5230	17.40	17.50	1.023	95.37	1.049	-0.1	0.103	0.111
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(3)	3	46	5230	16.80	17.50	1.175	95.37	1.049	-0.1	0.053	0.065
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(4)	3	46	5230	17.40	17.50	1.023	95.37	1.049	-0.01	0.204	0.219
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(3)	3	46	5230	16.80	17.50	1.175	95.37	1.049	-0.01	0.078	0.096
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	Ant 4+3(3)	3	46	5230	16.80	17.50	1.175	95.37	1.049	0.14	0.120	0.148
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 4+3(4)	3	46	5230	17.40	17.50	1.023	95.37	1.049	0.09	0.323	0.347
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 4+3(4)	3	46	5230	17.40	17.50	1.023	95.37	1.049	0.1	0.191	0.205
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4	3	149	5745	19.30	19.50	1.047	97.94	1.021	-0.18	0.104	0.111
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4	3	149	5745	19.30	19.50	1.047	97.94	1.021	-0.1	0.347	0.371
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 4	3	149	5745	19.30	19.50	1.047	97.94	1.021	0.16	0.321	0.343
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 4	3	149	5745	19.30	19.50	1.047	97.94	1.021	0.17	0.720	0.770
60	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 4	3	157	5785	19.20	19.50	1.072	97.94	1.021	0.17	0.737	0.806
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 4	3	165	5825	19.20	19.50	1.072	97.94	1.021	-0.08	0.658	0.720
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	3	159	5795	17.30	17.50	1.047	95.3	1.049	-0.09	0.042	0.046
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	3	159	5795	17.30	17.50	1.047	95.3	1.049	-0.15	0.129	0.142
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	Ant 3	3	159	5795	17.30	17.50	1.047	95.3	1.049	0.12	0.224	0.246
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4+3(4)	3	157	5785	19.20	19.50	1.072	97.81	1.022	-0.09	0.067	0.073
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4+3(3)	3	157	5785	19.30	19.50	1.047	97.81	1.022	-0.09	0.040	0.043
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(4)	3	157	5785	19.20	19.50	1.072	97.81	1.022	-0.14	0.252	0.276
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(3)	3	157	5785	19.30	19.50	1.047	97.81	1.022	-0.14	0.197	0.211
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	Ant 4+3(3)	3	157	5785	19.30	19.50	1.047	97.81	1.022	0.15	0.363	0.388
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	Ant 4+3(4)	3	157	5785	19.20	19.50	1.072	97.81	1.022	-0.15	0.237	0.260
	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	Ant 4+3(4)	3	157	5785	19.20	19.50	1.072	97.81	1.022	0.12	0.618	0.677

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	3	39	2441	17.98	18.00	1.004	77.07	1.081	-0.08	0.053	0.058
61	Bluetooth	1Mbps	Back	10mm	Ant 4	3	39	2441	17.98	18.00	1.004	77.07	1.081	0.06	0.094	0.102
	Bluetooth	1Mbps	Back	10mm	Ant 4	3	0	2402	17.75	18.00	1.059	77.07	1.081	-0.04	0.053	0.061
	Bluetooth	1Mbps	Back	10mm	Ant 4	3	78	2480	17.26	18.00	1.185	77.07	1.081	0.03	0.079	0.101
	Bluetooth	1Mbps	Right Side	10mm	Ant 4	3	39	2441	17.98	18.00	1.004	77.07	1.081	0.07	0.052	0.056
	Bluetooth	1Mbps	Top Side	10mm	Ant 4	3	39	2441	17.98	18.00	1.004	77.07	1.081	0.07	0.066	0.072

15.3 Body Worn Accessory SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850_Ant 0	GPRS (4 Tx slots)	Front	10mm	DSI 4/8	189	836.4	28.00	29.50	1.413	-0.11	0.241	0.340
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	189	836.4	28.00	29.50	1.413	0.05	0.312	0.441
	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	128	824.2	27.77	29.50	1.489	0.16	0.328	0.489
62	GSM850_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	251	848.8	27.60	29.50	1.549	0	0.341	0.528
	GSM850_Ant 1	GPRS (4 Tx slots)	Front	10mm	DSI 4/8	128	824.2	27.38	28.20	1.208	-0.13	0.163	0.197
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	128	824.2	27.38	28.20	1.208	-0.16	0.265	0.320
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	189	836.4	27.27	28.20	1.239	-0.11	0.312	0.387
	GSM850_Ant 1	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	251	848.8	27.36	28.20	1.213	-0.15	0.295	0.358
	GSM1900_Ant 2	GPRS (4 Tx slots)	Front	10mm	DSI 4/8	810	1909.8	26.37	27.00	1.156	-0.01	0.335	0.387
	GSM1900_Ant 2	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	810	1909.8	26.37	27.00	1.156	-0.13	0.457	0.528
	GSM1900_Ant 2	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	512	1850.2	26.17	27.00	1.211	-0.17	0.389	0.471
63	GSM1900_Ant 2	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	661	1880	26.00	27.00	1.259	-0.17	0.473	0.595
	GSM1900_Ant 0	GPRS (4 Tx slots)	Front	10mm	DSI 4/8	661	1880	25.84	26.70	1.219	-0.11	0.182	0.222
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	661	1880	25.84	26.70	1.219	-0.17	0.370	0.451
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	512	1850.2	25.51	26.70	1.315	-0.03	0.343	0.451
	GSM1900_Ant 0	GPRS (4 Tx slots)	Back	10mm	DSI 4/8	810	1909.8	25.63	26.70	1.279	0.04	0.385	0.493

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 8	9538	1907.6	24.49	24.90	1.099	0.03	0.522	0.574
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	9538	1907.6	24.49	24.90	1.099	-0.15	0.776	0.853
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	9262	1852.4	24.13	24.90	1.194	-0.11	0.635	0.758
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	9400	1880	24.37	24.90	1.130	-0.07	0.731	0.826
	WCDMA II_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 4	9538	1907.6	24.49	25.70	1.321	0.03	0.522	0.690
64	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	9538	1907.6	24.49	25.70	1.321	-0.15	0.776	1.025
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	9262	1852.4	24.13	25.70	1.435	-0.11	0.635	0.912
	WCDMA II_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	9400	1880	24.37	25.70	1.358	-0.07	0.731	0.993
	WCDMA II_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 4/8	9538	1907.6	23.98	25.50	1.419	-0.04	0.365	0.518
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	9538	1907.6	23.98	25.50	1.419	-0.13	0.576	0.817
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	9262	1852.4	23.75	25.50	1.496	-0.18	0.446	0.667
	WCDMA II_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	9400	1880	23.79	25.50	1.483	-0.19	0.538	0.798
	WCDMA IV_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 8	1413	1732.6	23.84	24.6	1.191	-0.14	0.519	0.618
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	1413	1732.6	23.84	24.6	1.191	-0.07	0.538	0.641
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	1312	1712.4	23.75	24.6	1.216	-0.09	0.517	0.629
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 8	1513	1752.6	23.76	24.6	1.213	-0.12	0.586	0.711
	WCDMA IV_Ant 2	RMC 12.2Kbps	Front	10mm	DSI 4	1413	1732.6	23.84	25.2	1.368	-0.14	0.519	0.710
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	1413	1732.6	23.84	25.2	1.368	-0.07	0.538	0.736
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	1312	1712.4	23.75	25.2	1.396	-0.09	0.517	0.722
	WCDMA IV_Ant 2	RMC 12.2Kbps	Back	10mm	DSI 4	1513	1752.6	23.76	25.2	1.393	-0.12	0.586	0.816
	WCDMA IV_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 4/8	1413	1732.6	24.01	25.50	1.409	0.06	0.259	0.365
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	1413	1732.6	24.01	25.50	1.409	-0.06	0.608	0.857
	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	1312	1712.4	23.89	25.50	1.449	-0.1	0.594	0.861
65	WCDMA IV_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	1513	1752.6	23.97	25.50	1.422	-0.14	0.637	0.906
	WCDMA V_Ant 0	RMC 12.2Kbps	Front	10mm	DSI 4/8	4182	836.4	24.17	25.70	1.422	-0.15	0.232	0.330
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	4182	836.4	24.17	25.70	1.422	0	0.320	0.455
	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	4132	826.4	24.08	25.70	1.452	-0.04	0.320	0.465
66	WCDMA V_Ant 0	RMC 12.2Kbps	Back	10mm	DSI 4/8	4233	846.6	24.16	25.70	1.426	-0.1	0.328	0.468
	WCDMA V_Ant 1	RMC 12.2Kbps	Front	10mm	DSI 4/8	4182	836.4	23.62	25.00	1.374	-0.18	0.132	0.181
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 4/8	4182	836.4	23.62	25.00	1.374	0.05	0.216	0.297
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 4/8	4132	826.4	23.57	25.00	1.390	-0.12	0.286	0.398
	WCDMA V_Ant 1	RMC 12.2Kbps	Back	10mm	DSI 4/8	4233	846.6	23.57	25.00	1.390	-0.11	0.272	0.378

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA BC0_Ant 0	1xRTT RC3 SO32	Front	10mm	DSI 4/8	777	848.31	24.14	25.50	1.368	-0.18	0.248	0.339
	CDMA BC0_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	777	848.31	24.14	25.50	1.368	-0.01	0.351	0.480
	CDMA BC0_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	1013	824.7	24.09	25.50	1.384	-0.17	0.326	0.451
	CDMA BC0_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	384	836.52	24.11	25.50	1.377	0	0.349	0.481
	CDMA BC0_Ant 1	1xRTT RC3 SO32	Front	10mm	DSI 4/8	384	836.52	23.72	25.50	1.507	-0.07	0.184	0.277
	CDMA BC0_Ant 1	1xRTT RC3 SO32	Back	10mm	DSI 4/8	384	836.52	23.72	25.50	1.507	-0.06	0.217	0.327
67	CDMA BC0_Ant 1	1xRTT RC3 SO32	Back	10mm	DSI 4/8	1013	824.7	23.62	25.50	1.542	-0.07	0.328	0.506
	CDMA BC0_Ant 1	1xRTT RC3 SO32	Back	10mm	DSI 4/8	777	848.31	23.59	25.50	1.552	-0.09	0.299	0.464
	CDMA BC1_Ant 2	1xRTT RC3 SO32	Front	10mm	DSI 8	1175	1908.75	23.40	24.30	1.230	-0.02	0.430	0.529
	CDMA BC1_Ant 2	1xRTT RC3 SO32	Back	10mm	DSI 8	1175	1908.75	23.40	24.30	1.230	-0.12	0.665	0.818
	CDMA BC1_Ant 2	1xRTT RC3 SO32	Back	10mm	DSI 8	25	1851.25	22.94	24.30	1.368	-0.15	0.512	0.700
	CDMA BC1_Ant 2	1xRTT RC3 SO32	Back	10mm	DSI 8	600	1880	23.16	24.30	1.300	-0.14	0.595	0.774
	CDMA BC1_Ant 2-	1xRTT RC3 SO32	Front	10mm	DSI 4	1175	1908.75	24.18	25.10	1.236	-0.1	0.531	0.656
68	CDMA BC1_Ant 2-	1xRTT RC3 SO32	Back	10mm	DSI 4	1175	1908.75	24.18	25.10	1.236	-0.07	0.810	1.001
	CDMA BC1_Ant 2-	1xRTT RC3 SO32	Back	10mm	DSI 4	25	1851.25	23.76	25.10	1.361	-0.13	0.622	0.847
	CDMA BC1_Ant 2-	1xRTT RC3 SO32	Back	10mm	DSI 4	600	1880	23.98	25.10	1.294	-0.15	0.745	0.964
	CDMA BC1_Ant 0	1xRTT RC3 SO32	Front	10mm	DSI 4/8	1175	1908.75	24.06	25.50	1.393	-0.01	0.358	0.499
	CDMA BC1_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	1175	1908.75	24.06	25.50	1.393	-0.08	0.649	0.904
	CDMA BC1_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	25	1851.25	23.60	25.50	1.549	-0.09	0.510	0.790
	CDMA BC1_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	600	1880	23.86	25.50	1.459	-0.06	0.610	0.890
	CDMA BC10_Ant 0	1xRTT RC3 SO32	Front	10mm	DSI 4/8	580	820.5	24.12	25.50	1.374	-0.06	0.256	0.352
	CDMA BC10_Ant 0	1xRTT RC3 SO32	Back	10mm	DSI 4/8	580	820.5	24.12	25.50	1.374	-0.11	0.309	0.425
	CDMA BC10_Ant 1	1xRTT RC3 SO32	Front	10mm	DSI 4/8	580	820.5	23.68	25.50	1.521	-0.03	0.145	0.220
69	CDMA BC10_Ant 1	1xRTT RC3 SO32	Back	10mm	DSI 4/8	580	820.5	23.68	25.50	1.521	-0.15	0.305	0.464

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 8	21100	2535	22.97	23.30	1.079	-0.03	0.461	0.497
	LTE Band 7_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 8	21100	2535	22.87	23.30	1.104	-0.11	0.469	0.518
	LTE Band 7_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 8	21100	2535	22.97	23.30	1.079	-0.02	0.587	0.633
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	21100	2535	22.87	23.30	1.104	0.01	0.612	0.676
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	20850	2510	22.59	23.30	1.178	0.16	0.579	0.682
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	21350	2560	22.86	23.30	1.107	0.07	0.567	0.627
	LTE Band 7_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4	21100	2535	22.97	24.10	1.297	-0.03	0.461	0.598
	LTE Band 7_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4	21100	2535	22.87	24.10	1.327	-0.11	0.469	0.623
	LTE Band 7_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	21100	2535	22.97	24.10	1.297	-0.02	0.587	0.761
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	21100	2535	22.87	24.10	1.327	0.01	0.612	0.812
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	20850	2510	22.59	24.10	1.416	0.16	0.579	0.820
	LTE Band 7_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	21350	2560	22.86	24.10	1.330	0.07	0.567	0.754
70	LTE Band 7_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 4	21350	2560	22.86	24.10	1.330	-0.01	0.635	0.845
	LTE Band 7_Ant 0	20M	QPSK	1	99	Front	10mm	DSI 4/8	21100	2535	24.06	25.50	1.393	-0.02	0.127	0.177
	LTE Band 7_Ant 0	20M	QPSK	50	50	Front	10mm	DSI 4/8	21100	2535	23.16	24.50	1.361	-0.04	0.107	0.146
	LTE Band 7_Ant 0	20M	QPSK	1	99	Back	10mm	DSI 4/8	21100	2535	24.06	25.50	1.393	-0.01	0.242	0.337
	LTE Band 7_Ant 0	20M	QPSK	1	99	Back	10mm	DSI 4/8	20850	2510	23.99	25.50	1.416	-0.11	0.222	0.314
	LTE Band 7_Ant 0	20M	QPSK	1	99	Back	10mm	DSI 4/8	21350	2560	24.02	25.50	1.406	-0.17	0.201	0.283
	LTE Band 7_Ant 0	20M	QPSK	50	50	Back	10mm	DSI 4/8	21100	2535	23.16	24.50	1.361	-0.05	0.194	0.264



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12_Ant 0	10M	QPSK	1	49	Front	10mm	DSI 4/8	23095	707.5	24.63	25.70	1.279	-0.14	0.273	0.349
	LTE Band 12_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 4/8	23095	707.5	23.79	24.70	1.233	-0.14	0.224	0.276
71	LTE Band 12_Ant 0	10M	QPSK	1	49	Back	10mm	DSI 4/8	23095	707.5	24.63	25.70	1.279	-0.1	0.367	0.470
	LTE Band 12_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 4/8	23095	707.5	23.79	24.70	1.233	-0.11	0.308	0.380
	LTE Band 12_Ant 1	10M	QPSK	1	49	Front	10mm	DSI 4/8	23095	707.5	24.43	25.70	1.340	-0.04	0.193	0.259
	LTE Band 12_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 4/8	23095	707.5	23.59	24.70	1.291	-0.06	0.154	0.199
	LTE Band 12_Ant 1	10M	QPSK	1	49	Back	10mm	DSI 4/8	23095	707.5	24.43	25.70	1.340	-0.01	0.258	0.346
	LTE Band 12_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 4/8	23095	707.5	23.59	24.70	1.291	-0.03	0.196	0.253
	LTE Band 13_Ant 0	10M	QPSK	1	49	Front	10mm	DSI 4/8	23230	782	24.10	25.20	1.288	0.02	0.241	0.310
	LTE Band 13_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 4/8	23230	782	23.19	24.20	1.262	-0.13	0.196	0.247
72	LTE Band 13_Ant 0	10M	QPSK	1	49	Back	10mm	DSI 4/8	23230	782	24.10	25.20	1.288	-0.15	0.291	0.375
	LTE Band 13_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 4/8	23230	782	23.19	24.20	1.262	0.02	0.241	0.304
	LTE Band 13_Ant 1	10M	QPSK	1	49	Front	10mm	DSI 4/8	23230	782	23.57	25.00	1.390	0	0.135	0.188
	LTE Band 13_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 4/8	23230	782	22.65	24.00	1.365	-0.03	0.123	0.168
	LTE Band 13_Ant 1	10M	QPSK	1	49	Back	10mm	DSI 4/8	23230	782	23.57	25.00	1.390	-0.06	0.235	0.327
	LTE Band 13_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 4/8	23230	782	22.65	24.00	1.365	-0.05	0.191	0.261
	LTE Band 14_Ant 0	10M	QPSK	1	0	Front	10mm	DSI 4/8	23330	793	24.59	25.70	1.291	-0.08	0.260	0.336
	LTE Band 14_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 4/8	23330	793	23.63	24.70	1.279	0.01	0.219	0.280
73	LTE Band 14_Ant 0	10M	QPSK	1	0	Back	10mm	DSI 4/8	23330	793	24.59	25.70	1.291	-0.03	0.280	0.362
	LTE Band 14_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 4/8	23330	793	23.63	24.70	1.279	-0.03	0.274	0.351
	LTE Band 14_Ant 1	10M	QPSK	1	0	Front	10mm	DSI 4/8	23330	793	23.66	25.00	1.361	0.18	0.107	0.146
	LTE Band 14_Ant 1	10M	QPSK	25	25	Front	10mm	DSI 4/8	23330	793	22.74	24.00	1.337	-0.15	0.100	0.134
	LTE Band 14_Ant 1	10M	QPSK	1	0	Back	10mm	DSI 4/8	23330	793	23.66	25.00	1.361	-0.03	0.212	0.289
	LTE Band 14_Ant 1	10M	QPSK	25	25	Back	10mm	DSI 4/8	23330	793	22.74	24.00	1.337	-0.05	0.184	0.246
	LTE Band 25_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 8	26590	1905	23.14	24.40	1.337	-0.09	0.478	0.639
	LTE Band 25_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 8	26590	1905	23.27	24.40	1.297	-0.04	0.482	0.625
	LTE Band 25_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 8	26590	1905	23.14	24.40	1.337	-0.08	0.570	0.762
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	26590	1905	23.27	24.40	1.297	-0.08	0.600	0.778
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	26140	1860	23.13	24.40	1.340	-0.13	0.475	0.636
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	26340	1880	23.20	24.40	1.318	-0.09	0.537	0.708
	LTE Band 25_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4	26590	1905	23.14	24.80	1.466	-0.09	0.478	0.701
	LTE Band 25_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4	26590	1905	23.27	24.70	1.390	-0.04	0.482	0.670
	LTE Band 25_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	26590	1905	23.14	24.80	1.466	-0.08	0.570	0.835
	LTE Band 25_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	26140	1860	22.96	24.80	1.528	-0.03	0.504	0.770
	LTE Band 25_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	26340	1880	23.13	24.70	1.435	-0.09	0.564	0.810
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	26590	1905	23.27	24.70	1.390	-0.08	0.600	0.834
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	26140	1860	23.13	24.70	1.435	-0.13	0.475	0.682
	LTE Band 25_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	26340	1880	23.20	24.70	1.413	-0.09	0.537	0.759
74	LTE Band 25_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 4	26590	1905	23.25	24.70	1.396	-0.08	0.617	0.862
	LTE Band 25_Ant 0	20M	QPSK	1	49	Front	10mm	DSI 4/8	26590	1905	23.68	25.50	1.521	-0.03	0.286	0.435
	LTE Band 25_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 4/8	26590	1905	22.81	24.50	1.476	-0.06	0.234	0.345
	LTE Band 25_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	26590	1905	23.68	25.50	1.521	-0.1	0.477	0.725
	LTE Band 25_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	26140	1860	23.61	25.50	1.545	-0.13	0.508	0.785
	LTE Band 25_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	26340	1880	23.61	25.50	1.545	-0.11	0.556	0.859
	LTE Band 25_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 4/8	26590	1905	22.81	24.50	1.476	-0.12	0.387	0.571
	LTE Band 25_Ant 0	20M	QPSK	100	0	Back	10mm	DSI 4/8	26590	1905	22.78	24.50	1.486	-0.12	0.181	0.269



FCC SAR TEST REPORT

Report No. : FA001507-01A

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26_Ant 0	15M	QPSK	1	0	Front	10mm	DSI 4/8	26865	831.5	24.49	25.70	1.321	0	0.227	0.300
	LTE Band 26_Ant 0	15M	QPSK	36	20	Front	10mm	DSI 4/8	26865	831.5	23.67	24.70	1.268	-0.11	0.176	0.223
75	LTE Band 26_Ant 0	15M	QPSK	1	0	Back	10mm	DSI 4/8	26865	831.5	24.49	25.70	1.321	-0.11	0.305	0.403
	LTE Band 26_Ant 0	15M	QPSK	36	20	Back	10mm	DSI 4/8	26865	831.5	23.67	24.70	1.268	-0.03	0.251	0.318
	LTE Band 5B_Ant 0	10M	QPSK	1	0	Back	10mm	DSI 4/8	20575	841.5	25.43	25.70	1.064	-0.06	0.164	0.175
	LTE Band 26_Ant 1	15M	QPSK	1	0	Front	10mm	DSI 4/8	26865	831.5	23.49	25.00	1.416	-0.13	0.150	0.212
	LTE Band 26_Ant 1	15M	QPSK	36	0	Front	10mm	DSI 4/8	26865	831.5	22.64	24.00	1.368	-0.09	0.123	0.168
	LTE Band 26_Ant 1	15M	QPSK	1	0	Back	10mm	DSI 4/8	26865	831.5	23.49	25.00	1.416	-0.04	0.271	0.384
	LTE Band 26_Ant 1	15M	QPSK	36	0	Back	10mm	DSI 4/8	26865	831.5	22.64	24.00	1.368	-0.09	0.218	0.298
	LTE Band 5B_Ant 1	10M	QPSK	1	0	Back	10mm	DSI 4/8	20600	844	24.34	25.00	1.164	0.09	0.234	0.272
	LTE Band 30_Ant 2	10M	QPSK	1	0	Front	10mm	DSI 4/8	27710	2310	23.15	24.20	1.274	-0.05	0.506	0.644
	LTE Band 30_Ant 2	10M	QPSK	25	25	Front	10mm	DSI 4/8	27710	2310	22.18	23.20	1.265	-0.07	0.409	0.517
76	LTE Band 30_Ant 2	10M	QPSK	1	0	Back	10mm	DSI 4/8	27710	2310	23.15	24.20	1.274	0.03	0.675	0.860
	LTE Band 30_Ant 2	10M	QPSK	25	25	Back	10mm	DSI 4/8	27710	2310	22.18	23.20	1.265	0.01	0.552	0.698
	LTE Band 30_Ant 2	10M	QPSK	50	0	Back	10mm	DSI 4/8	27710	2310	22.14	23.20	1.276	-0.06	0.549	0.701
	LTE Band 30_Ant 0	10M	QPSK	1	25	Front	10mm	DSI 4/8	27710	2310	23.88	25.70	1.521	-0.12	0.370	0.563
	LTE Band 30_Ant 0	10M	QPSK	25	25	Front	10mm	DSI 4/8	27710	2310	22.96	24.70	1.493	-0.14	0.306	0.457
	LTE Band 30_Ant 0	10M	QPSK	1	25	Back	10mm	DSI 4/8	27710	2310	23.88	25.70	1.521	-0.12	0.509	0.774
	LTE Band 30_Ant 0	10M	QPSK	25	25	Back	10mm	DSI 4/8	27710	2310	22.96	24.70	1.493	-0.1	0.458	0.684
	LTE Band 66_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 8	132322	1745	23.60	24.00	1.096	0.03	0.526	0.577
	LTE Band 66_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 8	132322	1745	22.87	24.00	1.297	0.01	0.553	0.717
	LTE Band 66_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 8	132322	1745	23.60	24.00	1.096	-0.16	0.607	0.666
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	132322	1745	22.87	24.00	1.297	-0.15	0.625	0.811
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	132072	1720	22.82	24.00	1.312	-0.13	0.631	0.828
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 8	132572	1770	22.76	24.00	1.330	-0.1	0.622	0.828
	LTE Band 66_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 8	132322	1745	22.82	24.00	1.312	-0.12	0.625	0.820
	LTE Band 66_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4	132322	1745	23.60	24.80	1.318	0.03	0.526	0.693
	LTE Band 66_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4	132322	1745	22.87	24.70	1.524	0.01	0.553	0.843
	LTE Band 66_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4	132072	1720	22.82	24.70	1.542	-0.02	0.552	0.851
	LTE Band 66_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4	132572	1770	22.76	24.70	1.563	0.01	0.535	0.836
	LTE Band 66_Ant 2	20M	QPSK	100	0	Front	10mm	DSI 4	132322	1745	22.82	24.70	1.542	0.12	0.541	0.834
	LTE Band 66_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	132322	1745	23.60	24.80	1.318	-0.16	0.607	0.800
	LTE Band 66_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4	132072	1720	23.58	24.80	1.324	-0.09	0.533	0.706
	LTE Band 66_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4	132572	1770	23.55	24.80	1.334	-0.14	0.553	0.737
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	132322	1745	22.87	24.70	1.524	-0.15	0.625	0.953
77	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	132072	1720	22.82	24.70	1.542	-0.13	0.631	0.973
	LTE Band 66_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4	132572	1770	22.76	24.70	1.563	-0.1	0.622	0.972
	LTE Band 66_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 4	132322	1745	22.82	24.70	1.542	-0.12	0.625	0.964
	LTE Band 66_Ant 0	20M	QPSK	1	0	Front	10mm	DSI 8	132322	1745	23.54	25.10	1.432	-0.18	0.271	0.388
	LTE Band 66_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 8	132322	1745	22.97	24.50	1.422	-0.17	0.236	0.336
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 8	132322	1745	23.54	25.10	1.432	-0.06	0.588	0.842
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 8	132072	1720	23.52	25.10	1.439	-0.13	0.555	0.799
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 8	132572	1770	23.45	25.10	1.462	-0.08	0.572	0.836
	LTE Band 66_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 8	132322	1745	22.97	24.50	1.422	-0.17	0.548	0.779
	LTE Band 66_Ant 0	20M	QPSK	100	0	Back	10mm	DSI 8	132072	1720	22.95	24.50	1.429	-0.09	0.564	0.806
	LTE Band 66_Ant 0	20M	QPSK	1	0	Front	10mm	DSI 4	132322	1745	23.97	25.50	1.422	-0.12	0.285	0.405
	LTE Band 66_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 4	132322	1745	22.99	24.50	1.416	-0.07	0.229	0.324
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4	132322	1745	23.97	25.50	1.422	-0.1	0.636	0.905
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4	132072	1720	23.93	25.50	1.435	-0.11	0.599	0.860
	LTE Band 66_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4	132572	1770	23.84	25.50	1.466	-0.17	0.621	0.910
	LTE Band 66_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 4	132322	1745	22.99	24.50	1.416	-0.11	0.512	0.725
	LTE Band 66_Ant 0	20M	QPSK	100	0	Back	10mm	DSI 4	132322	1745	22.93	24.50	1.435	-0.17	0.508	0.729



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71_Ant 0	20M	QPSK	1	0	Front	10mm	DSI 4/8	133322	683	24.57	25.70	1.297	-0.12	0.214	0.278
	LTE Band 71_Ant 0	20M	QPSK	50	0	Front	10mm	DSI 4/8	133322	683	23.66	24.70	1.271	-0.11	0.180	0.229
78	LTE Band 71_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4/8	133322	683	24.57	25.70	1.297	-0.11	0.301	0.390
	LTE Band 71_Ant 0	20M	QPSK	50	0	Back	10mm	DSI 4/8	133322	683	23.66	24.70	1.271	0	0.240	0.305
	LTE Band 71_Ant 1	20M	QPSK	1	0	Front	10mm	DSI 4/8	133322	683	23.49	25.00	1.416	-0.11	0.102	0.144
	LTE Band 71_Ant 1	20M	QPSK	50	0	Front	10mm	DSI 4/8	133322	683	22.58	24.00	1.387	-0.07	0.092	0.128
	LTE Band 71_Ant 1	20M	QPSK	1	0	Back	10mm	DSI 4/8	133322	683	23.49	25.00	1.416	-0.15	0.160	0.227
	LTE Band 71_Ant 1	20M	QPSK	50	0	Back	10mm	DSI 4/8	133322	683	22.58	24.00	1.387	-0.07	0.138	0.191

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41_Ant 2	20M	QPSK	1	49	Front	10mm	DSI 4/8	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.18	0.500	0.615
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4/8	39750	2506	24.76	25.70	1.242	62.9	1.006	-0.12	0.426	0.532
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4/8	40185	2549.5	24.82	25.70	1.225	62.9	1.006	-0.13	0.461	0.568
	LTE Band 41_Ant 2	20M	QPSK	1	99	Front	10mm	DSI 4/8	40620	2593	24.75	25.70	1.245	62.9	1.006	-0.02	0.492	0.616
	LTE Band 41_Ant 2	20M	QPSK	1	49	Front	10mm	DSI 4/8	41490	2680	24.68	25.70	1.265	62.9	1.006	-0.12	0.446	0.567
	LTE Band 41_Ant 2	20M	QPSK	50	50	Front	10mm	DSI 4/8	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.18	0.379	0.451
79	LTE Band 41_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 4/8	41055	2636.5	24.83	25.70	1.222	62.9	1.006	-0.16	0.738	0.907
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4/8	39750	2506	24.76	25.70	1.242	62.9	1.006	0	0.521	0.651
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4/8	40185	2549.5	24.82	25.70	1.225	62.9	1.006	-0.04	0.619	0.763
	LTE Band 41_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4/8	40620	2593	24.75	25.70	1.245	62.9	1.006	0.02	0.638	0.799
	LTE Band 41_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 4/8	41490	2680	24.68	25.70	1.265	62.9	1.006	-0.05	0.687	0.874
	LTE Band 41_Ant 2	20M	QPSK	50	50	Back	10mm	DSI 4/8	40185	2549.5	23.97	24.70	1.183	62.9	1.006	-0.05	0.510	0.607
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 4/8	39750	2506	23.90	24.70	1.202	62.9	1.006	-0.05	0.453	0.548
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 4/8	40620	2593	23.83	24.70	1.222	62.9	1.006	-0.03	0.567	0.697
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 4/8	41055	2636.5	23.87	24.70	1.211	62.9	1.006	-0.07	0.636	0.775
	LTE Band 41_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 4/8	41490	2680	23.77	24.70	1.239	62.9	1.006	-0.14	0.621	0.774
	LTE Band 41_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 4/8	40185	2549.5	23.95	24.70	1.189	62.9	1.006	-0.02	0.562	0.672
	LTE Band 41C_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4/8	41490	2680	25.05	25.70	1.161	62.9	1.006	-0.02	0.485	0.567
	LTE Band 41_HPUE_Ant 2	20M	QPSK	1	49	Back	10mm	DSI 4/8	41055	2636.5	26.54	27.50	1.247	42.9	1.009	0.14	0.715	0.900
	LTE Band 41C_HPUE_Ant 2	20M	QPSK	1	99	Back	10mm	DSI 4/8	41490	2680	27.44	27.50	1.014	42.9	1.009	-0.08	0.548	0.561
	LTE Band 41_Ant 0	20M	QPSK	1	49	Front	10mm	DSI 4/8	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.08	0.053	0.074
	LTE Band 41_Ant 0	20M	QPSK	50	24	Front	10mm	DSI 4/8	40185	2549.5	23.19	24.50	1.352	62.9	1.006	-0.07	0.058	0.079
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	41055	2636.5	24.09	25.50	1.384	62.9	1.006	-0.06	0.113	0.157
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	39750	2506	23.99	25.50	1.416	62.9	1.006	0.11	0.109	0.155
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	40185	2549.5	24.01	25.50	1.409	62.9	1.006	-0.14	0.132	0.187
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	40620	2593	23.84	25.50	1.466	62.9	1.006	0.06	0.091	0.134
	LTE Band 41_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	41490	2680	24.02	25.50	1.406	62.9	1.006	-0.17	0.108	0.153
	LTE Band 41_Ant 0	20M	QPSK	50	24	Back	10mm	DSI 4/8	40185	2549.5	23.19	24.50	1.352	62.9	1.006	0.05	0.110	0.150
	LTE Band 41C_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4/8	41490	2680	24.76	25.50	1.186	62.9	1.006	0.08	0.129	0.154
	LTE Band 41_HPUE_Ant 0	20M	QPSK	1	49	Back	10mm	DSI 4/8	41055	2636.5	25.87	27.00	1.297	42.9	1.009	-0.1	0.131	0.171
	LTE Band 41C_HPUE_Ant 0	20M	QPSK	1	0	Back	10mm	DSI 4/8	41490	2680	26.98	27.00	1.005	42.9	1.009	-0.03	0.145	0.147



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48_Ant 7	20M	QPSK	1	99	Front	10mm	DSI 8	56150	3641	22.38	23.30	1.236	62.9	1.006	-0.1	0.221	0.275
	LTE Band 48_Ant 7	20M	QPSK	50	24	Front	10mm	DSI 8	56150	3641	22.48	23.30	1.208	62.9	1.006	-0.16	0.229	0.278
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 8	56150	3641	22.38	23.30	1.236	62.9	1.006	0.12	0.592	0.736
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 8	55340	3560	22.22	23.30	1.282	62.9	1.006	0.08	0.642	0.828
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 8	55830	3609	22.31	23.30	1.256	62.9	1.006	0.05	0.689	0.871
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 8	56640	3690	22.22	23.30	1.282	62.9	1.006	-0.02	0.624	0.805
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 8	56150	3641	22.48	23.30	1.208	62.9	1.006	0.07	0.609	0.740
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 8	55340	3560	22.27	23.30	1.268	62.9	1.006	0.08	0.653	0.833
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 8	55830	3609	22.32	23.30	1.253	62.9	1.006	-0.1	0.716	0.903
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 8	56640	3690	22.23	23.30	1.279	62.9	1.006	-0.03	0.653	0.840
	LTE Band 48_Ant 7	20M	QPSK	100	0	Back	10mm	DSI 8	56150	3641	22.46	23.30	1.213	62.9	1.006	0	0.688	0.840
	LTE Band 48_Ant 7	20M	QPSK	1	99	Front	10mm	DSI 4	56150	3641	22.38	24.10	1.486	62.9	1.006	-0.1	0.221	0.330
	LTE Band 48_Ant 7	20M	QPSK	50	24	Front	10mm	DSI 4	56150	3641	22.48	24.10	1.452	62.9	1.006	-0.16	0.229	0.335
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 4	56150	3641	22.38	24.10	1.486	62.9	1.006	0.12	0.592	0.885
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 4	55340	3560	22.22	24.10	1.542	62.9	1.006	0.08	0.642	0.996
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 4	55830	3609	22.31	24.10	1.510	62.9	1.006	0.05	0.689	1.047
	LTE Band 48_Ant 7	20M	QPSK	1	99	Back	10mm	DSI 4	56640	3690	22.22	24.10	1.542	62.9	1.006	-0.02	0.624	0.968
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 4	56150	3641	22.48	24.10	1.452	62.9	1.006	0.07	0.609	0.890
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 4	55340	3560	22.27	24.10	1.524	62.9	1.006	0.08	0.653	1.001
80	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 4	55830	3609	22.32	24.10	1.507	62.9	1.006	-0.1	0.716	1.085
	LTE Band 48_Ant 7	20M	QPSK	50	24	Back	10mm	DSI 4	56640	3690	22.23	24.10	1.538	62.9	1.006	-0.03	0.653	1.010
	LTE Band 48_Ant 7	20M	QPSK	100	0	Back	10mm	DSI 4	56150	3641	22.46	24.10	1.459	62.9	1.006	0	0.688	1.010
	LTE Band 48_Ant 2	20M	QPSK	1	0	Front	10mm	DSI 8	56640	3690	23.01	24.10	1.285	62.9	1.006	-0.07	0.245	0.317
	LTE Band 48_Ant 2	20M	QPSK	50	24	Front	10mm	DSI 8	56640	3690	22.86	24.10	1.330	62.9	1.006	-0.13	0.263	0.352
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 8	56640	3690	23.01	24.10	1.285	62.9	1.006	-0.07	0.615	0.795
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 8	55340	3560	22.8	24.10	1.349	62.9	1.006	-0.11	0.515	0.699
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 8	55830	3609	22.82	24.10	1.343	62.9	1.006	-0.11	0.518	0.700
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 8	56150	3641	22.88	24.10	1.324	62.9	1.006	-0.14	0.540	0.719
	LTE Band 48_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 8	56640	3690	22.86	24.10	1.330	62.9	1.006	-0.1	0.609	0.815
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 8	55340	3560	22.71	24.10	1.377	62.9	1.006	-0.1	0.533	0.738
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 8	55830	3609	22.86	24.10	1.330	62.9	1.006	-0.14	0.544	0.728
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 8	56150	3641	22.84	24.10	1.337	62.9	1.006	-0.11	0.565	0.760
	LTE Band 48_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 8	56640	3690	22.85	24.10	1.334	62.9	1.006	-0.17	0.615	0.825
	LTE Band 48_Ant 2	20M	QPSK	1	0	Front	10mm	DSI 4	56640	3690	23.74	24.90	1.306	62.9	1.006	-0.03	0.353	0.464
	LTE Band 48_Ant 2	20M	QPSK	50	24	Front	10mm	DSI 4	56640	3690	23.39	24.90	1.416	62.9	1.006	0.03	0.329	0.469
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4	56640	3690	23.74	24.90	1.306	62.9	1.006	-0.19	0.720	0.946
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4	55340	3560	23.48	24.90	1.387	62.9	1.006	-0.14	0.649	0.905
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4	55830	3609	23.57	24.90	1.358	62.9	1.006	-0.19	0.656	0.896
	LTE Band 48_Ant 2	20M	QPSK	1	0	Back	10mm	DSI 4	56150	3641	23.67	24.90	1.327	62.9	1.006	-0.1	0.688	0.919
	LTE Band 48_Ant 2	20M	QPSK	50	24	Back	10mm	DSI 4	56640	3690	23.39	24.70	1.352	62.9	1.006	-0.1	0.676	0.919
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 4	55340	3560	23.22	24.70	1.406	62.9	1.006	-0.14	0.620	0.877
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 4	55830	3609	23.35	24.70	1.365	62.9	1.006	-0.19	0.639	0.877
	LTE Band 48_Ant 2	20M	QPSK	50	0	Back	10mm	DSI 4	56150	3641	23.36	24.70	1.361	62.9	1.006	-0.17	0.652	0.893
	LTE Band 48_Ant 2	20M	QPSK	100	0	Back	10mm	DSI 4	56640	3690	23.40	24.70	1.349	62.9	1.006	-0.1	0.695	0.943



<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n5_Ant 0	20M	BPSK	1	1	Front	10mm	DSI 4/8	167300	836.5	24.24	25.00	1.191	-0.15	0.118	0.141
	FR1 n5_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 4/8	167300	836.5	24.09	25.00	1.233	-0.12	0.117	0.144
	FR1 n5_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 4/8	167300	836.5	24.24	25.00	1.191	-0.03	0.241	0.287
	FR1 n5_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 4/8	167300	836.5	24.09	25.00	1.233	-0.01	0.259	0.319
	FR1 n5_Ant 1	20M	BPSK	1	1	Front	10mm	DSI 4/8	167300	836.5	23.51	25.00	1.409	-0.1	0.153	0.216
	FR1 n5_Ant 1	20M	BPSK	50	28	Front	10mm	DSI 4/8	167300	836.5	23.30	25.00	1.479	-0.01	0.142	0.210
	FR1 n5_Ant 1	20M	BPSK	1	1	Back	10mm	DSI 4/8	167300	836.5	23.51	25.00	1.409	-0.1	0.256	0.361
81	FR1 n5_Ant 1	20M	BPSK	50	28	Back	10mm	DSI 4/8	167300	836.5	23.30	25.00	1.479	-0.06	0.253	0.374
	FR1 n12_Ant 0	15M	BPSK	1	1	Front	10mm	DSI 4/8	141500	707.5	23.91	24.70	1.199	-0.06	0.093	0.112
	FR1 n12_Ant 0	15M	BPSK	36	22	Front	10mm	DSI 4/8	141500	707.5	23.67	24.70	1.268	-0.06	0.083	0.105
	FR1 n12_Ant 0	15M	BPSK	1	1	Back	10mm	DSI 4/8	141500	707.5	23.91	24.70	1.199	-0.03	0.119	0.143
	FR1 n12_Ant 0	15M	BPSK	36	22	Back	10mm	DSI 4/8	141500	707.5	23.67	24.70	1.268	0.08	0.117	0.148
	FR1 n12_Ant 1	15M	BPSK	1	1	Front	10mm	DSI 4/8	141500	707.5	22.16	23.00	1.213	-0.12	0.107	0.130
	FR1 n12_Ant 1	15M	BPSK	36	0	Front	10mm	DSI 4/8	141500	707.5	22.07	23.00	1.239	-0.05	0.107	0.133
82	FR1 n12_Ant 1	15M	BPSK	1	1	Back	10mm	DSI 4/8	141500	707.5	22.16	23.00	1.213	-0.17	0.152	0.184
	FR1 n12_Ant 1	15M	BPSK	36	0	Back	10mm	DSI 4/8	141500	707.5	22.07	23.00	1.239	-0.16	0.143	0.177
	FR1 n25_Ant 2	20M	BPSK	1	104	Front	10mm	DSI 8	376500	1882.5	23.83	24.70	1.222	-0.15	0.477	0.583
	FR1 n25_Ant 2	20M	BPSK	50	56	Front	10mm	DSI 8	376500	1882.5	23.77	24.70	1.239	-0.02	0.476	0.590
	FR1 n25_Ant 2	20M	BPSK	1	104	Back	10mm	DSI 8	376500	1882.5	23.83	24.70	1.222	-0.04	0.607	0.742
	FR1 n25_Ant 2	20M	BPSK	50	56	Back	10mm	DSI 8	376500	1882.5	23.77	24.70	1.239	-0.03	0.600	0.743
	FR1 n25_Ant 2	20M	BPSK	50	56	Back	10mm	DSI 8	372000	1860	23.65	24.70	1.274	-0.15	0.547	0.697
	FR1 n25_Ant 2	20M	BPSK	50	56	Back	10mm	DSI 8	381000	1905	23.76	24.70	1.242	0.06	0.630	0.782
	FR1 n25_Ant 2-	20M	BPSK	1	104	Front	10mm	DSI 4	376500	1882.5	23.83	25.10	1.340	-0.15	0.477	0.639
	FR1 n25_Ant 2-	20M	BPSK	50	56	Front	10mm	DSI 4	376500	1882.5	23.77	25.10	1.358	-0.02	0.476	0.647
	FR1 n25_Ant 2-	20M	BPSK	1	104	Back	10mm	DSI 4	376500	1882.5	23.83	25.10	1.340	-0.04	0.607	0.813
	FR1 n25_Ant 2-	20M	BPSK	1	104	Back	10mm	DSI 4	372000	1860	23.66	25.1	1.393	-0.12	0.566	0.789
83	FR1 n25_Ant 2-	20M	BPSK	1	104	Back	10mm	DSI 4	381000	1905	23.78	25.1	1.355	0.03	0.635	0.861
	FR1 n25_Ant 2-	20M	BPSK	50	56	Back	10mm	DSI 4	376500	1882.5	23.77	25.1	1.358	-0.03	0.600	0.815
	FR1 n25_Ant 2-	20M	BPSK	50	56	Back	10mm	DSI 4	372000	1860	23.65	25.1	1.396	-0.15	0.547	0.764
	FR1 n25_Ant 2-	20M	BPSK	50	56	Back	10mm	DSI 4	381000	1905	23.76	25.1	1.361	0.06	0.630	0.858
	FR1 n25_Ant 2-	20M	BPSK	100	0	Back	10mm	DSI 4	376500	1882.5	23.76	25.1	1.361	-0.1	0.583	0.794
	FR1 n25_Ant 0	20M	BPSK	1	53	Front	10mm	DSI 4/8	376500	1882.5	23.83	25.50	1.469	0.17	0.262	0.385
	FR1 n25_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 4/8	376500	1882.5	23.81	25.50	1.476	0.12	0.248	0.366
	FR1 n25_Ant 0	20M	BPSK	1	53	Back	10mm	DSI 4/8	376500	1882.5	23.83	25.50	1.469	-0.08	0.523	0.768
	FR1 n25_Ant 0	20M	BPSK	1	104	Back	10mm	DSI 4/8	372000	1860	23.82	25.50	1.472	-0.15	0.492	0.724
	FR1 n25_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 4/8	381000	1905	23.82	25.50	1.472	-0.16	0.503	0.741
	FR1 n25_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 4/8	376500	1882.5	23.81	25.50	1.476	-0.09	0.520	0.767
	FR1 n41_Ant 2	100M	BPSK	1	137	Front	10mm	DSI 4/8	518598	2592.99	24.70	25.70	1.259	-0.1	0.168	0.279
	FR1 n41_Ant 2	100M	BPSK	135	69	Front	10mm	DSI 4/8	518598	2592.99	24.63	25.70	1.279	-0.04	0.175	0.296
	FR1 n41_Ant 2	100M	BPSK	1	137	Back	10mm	DSI 4/8	518598	2592.99	24.70	25.70	1.259	-0.05	0.270	0.449
	FR1 n41_Ant 2	100M	BPSK	135	69	Back	10mm	DSI 4/8	518598	2592.99	24.63	25.70	1.279	-0.1	0.252	0.426
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Front	10mm	DSI 4/8	518598	2592.99	25.38	26.80	1.387	0.14	0.125	0.229
	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Front	10mm	DSI 4/8	518598	2592.99	25.45	26.80	1.365	-0.17	0.143	0.258
	FR1 n41_HPUE_Ant 5	100M	BPSK	1	1	Back	10mm	DSI 4/8	518598	2592.99	25.38	26.80	1.387	-0.06	0.519	0.950
84	FR1 n41_HPUE_Ant 5	100M	BPSK	135	69	Back	10mm	DSI 4/8	518598	2592.99	25.45	26.80	1.365	-0.08	0.552	0.994
	FR1 n41_HPUE_Ant 5	100M	BPSK	270	0	Back	10mm	DSI 4/8	518598	2592.99	25.40	26.80	1.380	-0.1	0.545	0.993
	FR1 n41_Ant 0	100M	BPSK	1	271	Front	10mm	DSI 4/8	518598	2592.99	24.80	25.50	1.175	0.19	0.086	0.133
	FR1 n41_Ant 0	100M	BPSK	135	69	Front	10mm	DSI 4/8	518598	2592.99	24.60	25.50	1.230	0.13	0.103	0.167
	FR1 n41_Ant 0	100M	BPSK	1	271	Back	10mm	DSI 4/8	518598	2592.99	24.80	25.50	1.175	0.14	0.131	0.203
	FR1 n41_Ant 0	100M	BPSK	135	69	Back	10mm	DSI 4/8	518598	2592.99	24.60	25.50	1.230	0.17	0.170	0.276



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66_Ant 2	20M	BPSK	1	1	Front	10mm	DSI 8	349000	1745	23.84	24.30	1.112	0.06	0.587	0.653
	FR1 n66_Ant 2	20M	BPSK	50	0	Front	10mm	DSI 8	349000	1745	23.83	24.30	1.114	0.08	0.563	0.627
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 8	349000	1745	23.84	24.30	1.112	-0.15	0.636	0.707
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 8	344000	1720	23.77	24.30	1.130	-0.16	0.678	0.766
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 8	354000	1770	23.80	24.30	1.122	-0.19	0.533	0.598
	FR1 n66_Ant 2	20M	BPSK	50	0	Back	10mm	DSI 8	349000	1745	23.83	24.30	1.114	-0.16	0.626	0.698
	FR1 n66_Ant 2	20M	BPSK	1	1	Front	10mm	DSI 4	349000	1745	23.84	25.10	1.337	0.06	0.587	0.785
	FR1 n66_Ant 2	20M	BPSK	50	0	Front	10mm	DSI 4	349000	1745	23.83	25.10	1.340	0.08	0.563	0.754
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 4	349000	1745	23.84	25.10	1.337	-0.15	0.636	0.850
85	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 4	344000	1720	23.77	25.10	1.358	-0.16	0.678	0.921
	FR1 n66_Ant 2	20M	BPSK	1	1	Back	10mm	DSI 4	354000	1770	23.80	25.10	1.349	-0.19	0.533	0.719
	FR1 n66_Ant 2	20M	BPSK	50	0	Back	10mm	DSI 4	349000	1745	23.83	25.10	1.340	-0.16	0.626	0.839
	FR1 n66_Ant 2	20M	BPSK	50	0	Back	10mm	DSI 4	344000	1720	23.75	25.10	1.365	-0.07	0.668	0.912
	FR1 n66_Ant 2	20M	BPSK	50	0	Back	10mm	DSI 4	354000	1770	23.74	25.10	1.368	-0.18	0.477	0.652
	FR1 n66_Ant 2	20M	BPSK	100	0	Back	10mm	DSI 4	349000	1745	23.74	25.10	1.368	-0.16	0.633	0.866
	FR1 n66_Ant 0	20M	BPSK	1	1	Front	10mm	DSI 4/8	349000	1745	23.87	25.50	1.455	-0.08	0.167	0.243
	FR1 n66_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 4/8	349000	1745	23.78	25.50	1.486	0.08	0.162	0.241
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 4/8	349000	1745	23.87	25.50	1.455	0	0.399	0.581
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 4/8	344000	1720	23.85	25.50	1.462	-0.14	0.454	0.664
	FR1 n66_Ant 0	20M	BPSK	1	1	Back	10mm	DSI 4/8	354000	1770	23.84	25.50	1.466	-0.05	0.450	0.659
	FR1 n66_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 4/8	349000	1745	23.78	25.50	1.486	0.01	0.383	0.569
	FR1 n71_Ant 0	20M	BPSK	1	53	Front	10mm	DSI 4/8	136100	680.5	24.44	25.70	1.337	-0.11	0.103	0.138
	FR1 n71_Ant 0	20M	BPSK	50	28	Front	10mm	DSI 4/8	136100	680.5	24.44	25.70	1.337	0.11	0.124	0.166
	FR1 n71_Ant 0	20M	BPSK	1	53	Back	10mm	DSI 4/8	136100	680.5	24.44	25.70	1.337	-0.18	0.119	0.159
	FR1 n71_Ant 0	20M	BPSK	50	28	Back	10mm	DSI 4/8	136100	680.5	24.44	25.70	1.337	-0.15	0.152	0.203
	FR1 n71_Ant 1	20M	BPSK	1	1	Front	10mm	DSI 4/8	136100	680.5	23.43	25.00	1.435	-0.01	0.077	0.111
	FR1 n71_Ant 1	20M	BPSK	50	28	Front	10mm	DSI 4/8	136100	680.5	23.30	25.00	1.479	-0.07	0.100	0.148
	FR1 n71_Ant 1	20M	BPSK	1	1	Back	10mm	DSI 4/8	136100	680.5	23.43	25.00	1.435	-0.17	0.144	0.207
86	FR1 n71_Ant 1	20M	BPSK	50	28	Back	10mm	DSI 4/8	136100	680.5	23.30	25.00	1.479	-0.02	0.155	0.229
	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Front	10mm	DSI 4/8	656000	3840	25.26	26.50	1.330	0.01	0.215	0.378
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Front	10mm	DSI 4/8	656000	3840	25.11	26.50	1.377	-0.1	0.202	0.367
87	FR1 n77_HPUE_Ant 7	100M	BPSK	1	271	Back	10mm	DSI 4/8	656000	3840	25.26	26.50	1.330	-0.12	0.478	0.839
	FR1 n77_HPUE_Ant 7	100M	BPSK	135	69	Back	10mm	DSI 4/8	656000	3840	25.11	26.50	1.377	-0.12	0.435	0.791
	FR1 n77_HPUE_Ant 7	100M	BPSK	270	0	Back	10mm	DSI 4/8	656000	3840	24.56	26.00	1.393	-0.05	0.406	0.747
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Front	10mm	DSI 4/8	656000	3840	24.64	26.00	1.368	0.04	0.162	0.292
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Front	10mm	DSI 4/8	656000	3840	24.48	26.00	1.419	-0.11	0.148	0.277
	FR1 n77_HPUE_Ant 2	100M	BPSK	1	1	Back	10mm	DSI 4/8	656000	3840	24.64	26.00	1.368	-0.05	0.416	0.751
	FR1 n77_HPUE_Ant 2	100M	BPSK	135	69	Back	10mm	DSI 4/8	656000	3840	24.48	26.00	1.419	-0.06	0.160	0.300

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4	1/3	1	2412	19.70	20.00	1.072	100	1.000	-0.12	0.175	0.188
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4	1/3	1	2412	19.70	20.00	1.072	100	1.000	-0.18	0.258	0.276
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 3	1/3	11	2462	19.60	20.00	1.096	100	1.000	0.1	0.128	0.140
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 3	1/3	11	2462	19.60	20.00	1.096	100	1.000	-0.1	0.301	0.330
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+3(4)	1/3	6	2437	19.90	20.00	1.023	100	1.000	0.02	0.216	0.221
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 4+3(3)	1/3	6	2437	19.40	20.00	1.148	100	1.000	0.02	0.080	0.092
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	1/3	6	2437	19.90	20.00	1.023	100	1.000	-0.05	0.211	0.216
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	1/3	6	2437	19.40	20.00	1.148	100	1.000	-0.05	0.324	0.372
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	1/3	1	2412	19.60	20.00	1.096	100	1.000	-0.18	0.238	0.261
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	1/3	1	2412	19.40	20.00	1.148	100	1.000	-0.18	0.347	0.398
88	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(4)	1/3	11	2462	19.70	20.00	1.072	100	1.000	-0.06	0.215	0.230
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 4+3(3)	1/3	11	2462	19.50	20.00	1.122	100	1.000	-0.06	0.357	0.401
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	1/3	54	5270	17.20	17.50	1.072	95.88	1.043	0	0.102	0.114
89	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	1/3	54	5270	17.20	17.50	1.072	95.88	1.043	-0.12	0.224	0.250
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	1/3	62	5310	16.70	17.00	1.072	95.88	1.043	-0.11	0.216	0.241
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	1/3	54	5270	17.10	17.50	1.096	95.3	1.049	-0.09	0.042	0.048
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1/3	54	5270	17.10	17.50	1.096	95.3	1.049	-0.04	0.085	0.098
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(4)	1/3	54	5270	17.50	17.50	1.000	95.37	1.049	-0.05	0.087	0.091
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(3)	1/3	54	5270	17.20	17.50	1.072	95.37	1.049	-0.05	0.051	0.057
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(4)	1/3	54	5270	17.50	17.50	1.000	95.37	1.049	-0.03	0.230	0.241
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(3)	1/3	54	5270	17.20	17.50	1.072	95.37	1.049	-0.03	0.095	0.107
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4	1/3	134	5670	17.30	17.50	1.047	95.88	1.043	-0.14	0.040	0.044
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4	1/3	134	5670	17.30	17.50	1.047	95.88	1.043	-0.05	0.152	0.166
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	1	142	5710	16.90	17.50	1.148	95.3	1.049	0.07	0.087	0.105
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1	142	5710	16.90	17.50	1.148	95.3	1.049	-0.05	0.199	0.240
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1	102	5510	15.30	16.00	1.175	95.3	1.049	-0.17	0.135	0.166
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1	110	5550	16.60	17.50	1.230	95.3	1.049	-0.19	0.153	0.197
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1	126	5630	16.40	17.50	1.288	95.3	1.049	-0.18	0.201	0.272
90	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	1	134	5670	16.60	17.50	1.230	95.3	1.049	-0.06	0.245	0.316
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 3	3	138	5690	14.60	15.00	1.096	92.62	1.080	0.06	0.037	0.044
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 3	3	138	5690	14.60	15.00	1.096	92.62	1.080	-0.05	0.155	0.184
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(4)	1/3	134	5670	17.50	17.50	1.000	95.37	1.049	-0.02	0.062	0.065
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 4+3(3)	1/3	134	5670	16.70	17.50	1.202	95.37	1.049	-0.02	0.053	0.067
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(4)	1/3	134	5670	17.50	17.50	1.000	95.37	1.049	-0.08	0.166	0.174
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 4+3(3)	1/3	134	5670	16.70	17.50	1.202	95.37	1.049	-0.08	0.188	0.237
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4	1/3	149	5745	19.30	19.50	1.047	97.94	1.021	-0.18	0.104	0.111
91	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4	1/3	149	5745	19.30	19.50	1.047	97.94	1.021	-0.1	0.347	0.371
	WLAN5GHz-	802.11a 6Mbps	Front	10mm	Ant 3	1	149	5745	19.30	19.50	1.047	97.96	1.021	-0.05	0.086	0.092
	WLAN5GHz-	802.11a 6Mbps	Back	10mm	Ant 3	1	149	5745	19.30	19.50	1.047	97.96	1.021	-0.17	0.269	0.288
	WLAN5GHz-	802.11a 6Mbps	Back	10mm	Ant 3	1	157	5785	19.20	19.50	1.072	97.96	1.021	-0.04	0.155	0.170
	WLAN5GHz-	802.11a 6Mbps	Back	10mm	Ant 3	1	165	5825	19.00	19.50	1.122	97.96	1.021	-0.08	0.127	0.145
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	3	159	5795	17.30	17.50	1.047	95.3	1.049	-0.09	0.042	0.046
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	3	159	5795	17.30	17.50	1.047	95.3	1.049	-0.15	0.129	0.142
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4+3(4)	1/3	157	5785	19.20	19.50	1.072	97.81	1.022	-0.09	0.067	0.073
	WLAN5GHz	802.11a 6Mbps	Front	10mm	Ant 4+3(3)	1/3	157	5785	19.30	19.50	1.047	97.81	1.022	-0.09	0.040	0.043
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(4)	1/3	157	5785	19.20	19.50	1.072	97.81	1.022	-0.14	0.252	0.276
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(3)	1/3	157	5785	19.30	19.50	1.047	97.81	1.022	-0.14	0.197	0.211



<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	Ant 4	1/3	39	2441	17.98	18.00	1.004	77.07	1.081	-0.08	0.053	0.058
92	Bluetooth	1Mbps	Back	10mm	Ant 4	1/3	39	2441	17.98	18.00	1.004	77.07	1.081	0.06	0.094	0.102
	Bluetooth	1Mbps	Back	10mm	Ant 4	1/3	0	2402	17.75	18.00	1.059	77.07	1.081	-0.04	0.053	0.061
	Bluetooth	1Mbps	Back	10mm	Ant 4	1/3	78	2480	17.26	18.00	1.185	77.07	1.081	0.03	0.079	0.101

15.4 Product Specific SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Table	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4	1	54	5270	17.20	17.50	1.072	95.88	1.043	0.04	0.360	0.402
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	1	54	5270	17.20	17.50	1.072	95.88	1.043	-0.06	0.780	0.872
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4	1	54	5270	17.20	17.50	1.072	95.88	1.043	0.02	0.609	0.681
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4	1	54	5270	17.20	17.50	1.072	95.88	1.043	0.06	0.793	0.886
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 3	1	54	5270	17.10	17.50	1.096	95.3	1.049	0.17	0.187	0.215
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 3	1	54	5270	17.10	17.50	1.096	95.3	1.049	-0.11	0.695	0.799
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 3	1	54	5270	17.10	17.50	1.096	95.3	1.049	0.05	0.473	0.544
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+3(4)	1	54	5270	17.50	17.50	1.000	95.37	1.049	-0.07	0.284	0.298
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+3(3)	1	54	5270	17.20	17.50	1.072	95.37	1.049	-0.07	0.112	0.126
93	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	54	5270	17.50	17.50	1.000	95.37	1.049	-0.13	0.874	0.917
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	54	5270	17.20	17.50	1.072	95.37	1.049	-0.13	0.638	0.717
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	62	5310	16.80	17.00	1.047	95.37	1.049	-0.03	0.614	0.674
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	62	5310	16.30	17.00	1.175	95.37	1.049	-0.03	0.639	0.788
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 4+3(3)	1	54	5270	17.20	17.50	1.072	95.37	1.049	0.05	0.384	0.432
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4+3(4)	1	54	5270	17.50	17.50	1.000	95.37	1.049	0.01	0.229	0.240
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4+3(4)	1	54	5270	17.50	17.50	1.000	95.37	1.049	0.04	0.805	0.844
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4	1	134	5670	17.30	17.50	1.047	95.88	1.043	-0.13	0.235	0.257
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4	1	134	5670	17.30	17.50	1.047	95.88	1.043	-0.07	0.743	0.811
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4	1	134	5670	17.30	17.50	1.047	95.88	1.043	-0.14	0.239	0.261
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4	1	134	5670	17.30	17.50	1.047	95.88	1.043	0.17	0.792	0.865
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 3	1	142	5710	16.90	17.50	1.148	95.3	1.049	0.18	0.233	0.281
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 3	1	142	5710	16.90	17.50	1.148	95.3	1.049	-0.13	0.656	0.790
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 3	1	142	5710	16.90	17.50	1.148	95.3	1.049	0.16	0.372	0.448
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+3(4)	1	134	5670	17.50	17.50	1.000	95.37	1.049	-0.1	0.221	0.232
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 4+3(3)	1	134	5670	16.70	17.50	1.202	95.37	1.049	-0.1	0.258	0.325
94	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	134	5670	17.50	17.50	1.000	95.37	1.049	-0.08	0.801	0.840
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	134	5670	16.70	17.50	1.202	95.37	1.049	-0.08	1.010	1.274
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	102	5510	15.60	16.00	1.096	95.37	1.049	-0.16	0.402	0.462
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	102	5510	15.90	16.00	1.023	95.37	1.049	-0.16	0.698	0.749
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	110	5550	17.40	17.50	1.023	95.37	1.049	-0.02	0.420	0.451
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	110	5550	16.80	17.50	1.175	95.37	1.049	-0.02	0.771	0.950
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	126	5630	17.40	17.50	1.023	95.37	1.049	-0.06	0.429	0.461
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	126	5630	16.80	17.50	1.175	95.37	1.049	-0.06	0.868	1.070
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(4)	1	142	5710	17.50	17.50	1.000	95.37	1.049	-0.04	0.403	0.423
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 4+3(3)	1	142	5710	16.70	17.50	1.202	95.37	1.049	-0.04	0.597	0.753
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 4+3(3)	1	134	5670	16.70	17.50	1.202	95.37	1.049	0.12	0.397	0.501
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 4+3(4)	1	134	5670	17.50	17.50	1.000	95.37	1.049	0.11	0.253	0.265
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 4+3(4)	1	134	5670	17.50	17.50	1.000	95.37	1.049	0.14	0.848	0.890

15.5 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Output Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA BC1_Ant 2	1xRTT RC3 SO32	Back	10mm	DSI 4	1175	1908.75	24.18	25.10	1.236	-0.07	0.810		1.001
2nd	CDMA BC1_Ant 2	1xRTT RC3 SO32	Back	10mm	DSI 4	1175	1908.75	24.18	25.10	1.236	-0.15	0.779	1.04	0.963

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15.6 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with $< 10\%$ discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required

<LTE Band 41 Linearity Data for Head>

Config 0		
Maximum Tune up Power (dBm)	25.7	27.5
Reported 1g SAR (W/kg)	0.309	0.293
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	235.18	243.49
Linearity SAR(W/kg)	0.32	
% deviation from expected linearity		-8.41%

Config 1		
	LTE Band 41	LTE Band 41
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	25.5	27
Reported 1g SAR (W/kg)	0.111	0.105
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	224.60	217.01
Linearity SAR(W/kg)	0.11	
% deviation from expected linearity		-2.10%

<LTE Band 41 Linearity Data for Hotspot>

Config 0		
	LTE Band 41	LTE Band 41
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	25.7	27.5
Reported 1g SAR (W/kg)	0.907	0.9
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	235.18	243.49
Linearity SAR(W/kg)	0.94	
% deviation from expected linearity		-4.16%

Config 1		
	LTE Band 41	LTE Band 41
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	25.5	27
Reported 1g SAR (W/kg)	0.308	0.275
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	224.60	217.01
Linearity SAR(W/kg)	0.30	
% deviation from expected linearity		-7.59%

<LTE Band 41 Linearity Data for Body-worn>

Config 0		
	LTE Band 41	LTE Band 41
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	25.7	27.5
Reported 1g SAR (W/kg)	0.907	0.9
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	235.18	243.49
Linearity SAR(W/kg)	0.94	
% deviation from expected linearity		-4.16%

Config 1		
	LTE Band 41	LTE Band 41
	(Power Class 3)	(Power Class 2)
Maximum Tune up Power (dBm)	25.5	27
Reported 1g SAR (W/kg)	0.187	0.171
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	224.60	217.01
Linearity SAR(W/kg)	0.18	
% deviation from expected linearity		-5.36%

16. Simultaneous Transmission Analysis

Config	Mode	Capable TX Configurations
1	WWAN OFF (Cellular off)	WiFi 5G SISO (Chain0) + Bluetooth
2		WiFi 5G SISO (Chain1) + Bluetooth
3		WiFi 5G MIMO + Bluetooth
4		WiFi 5G SISO (Chain1)
5		WiFi 5G SISO (Chain0)
6		WiFi 5G MIMO
7		WiFi 2.4G SISO (Chain1)
8		WiFi 2.4G SISO (Chain0)
9		WiFi 2.4G MIMO/CDD
10		Bluetooth
11		WiFi 2.4G SISO (Chain0) + WiFi 5G SISO (Chain1)
12	WWAN ON + FR1 (Cellular on)	WiFi 5G SISO (Chain0) + Bluetooth
13		WiFi 5G SISO (Chain1) + Bluetooth
14		WiFi 5G MIMO + Bluetooth
15		WiFi 5G SISO (Chain1)
16		WiFi 5G SISO (Chain0)
17		WiFi 5G MIMO
18		WiFi 2.4G SISO (Chain1)
19		WiFi 2.4G SISO (Chain0)
20		WiFi 2.4G MIMO/CDD
21		Bluetooth
22		WiFi 2.4G SISO (Chain0) + WiFi 5G SISO (Chain1)

General Note:

- Simultaneous operation at maximum power levels when the device is neither against the body nor the head (i.e. in a mobile RF exposure condition) is addressed in Sporton's RF Exposure report FA001507-01B
- This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
- The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has WiFi Direct and Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.

16.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e., PD exposure for 5G FR2 or SAR exposure for 5G FR1), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

if $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then “ $x\% * A + (100-x)\% * B + C \leq 1.0$ ”. Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

**16.2 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM850_Ant 0	Right Cheek	0.277	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.726	0.396	0.682	0.491	0.614	0.304	0.532
	Right Tilted	0.165	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.632	0.246	0.666	0.286	0.785	0.207	0.294
	Left Cheek	0.379	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.932	1.123	1.248	0.816	0.897	0.513	1.230
	Left Tilted	0.189	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.890	0.459	0.954	0.265	0.525	0.275	0.610
GSM1900_Ant 2	Right Cheek	0.087	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.536	0.206	0.492	0.301	0.424	0.114	0.342
	Right Tilted	0.067	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.534	0.148	0.568	0.188	0.687	0.109	0.196
	Left Cheek	0.140	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.693	0.884	1.009	0.577	0.658	0.274	0.991
	Left Tilted	0.058	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.759	0.328	0.823	0.134	0.394	0.144	0.479
WCDMA II_Ant 2	Right Cheek	0.214	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.663	0.333	0.619	0.428	0.551	0.241	0.469
	Right Tilted	0.159	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.626	0.240	0.660	0.280	0.779	0.201	0.288
	Left Cheek	0.323	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.876	1.067	1.192	0.760	0.841	0.457	1.174
	Left Tilted	0.138	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.839	0.408	0.903	0.214	0.474	0.224	0.559
WCDMA IV_Ant 2	Right Cheek	0.230	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.679	0.349	0.635	0.444	0.567	0.257	0.485
	Right Tilted	0.142	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.609	0.223	0.643	0.263	0.762	0.184	0.271
	Left Cheek	0.297	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.850	1.041	1.166	0.734	0.815	0.431	1.148
	Left Tilted	0.151	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.852	0.421	0.916	0.227	0.487	0.237	0.572
WCDMA V_Ant 0	Right Cheek	0.236	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.685	0.355	0.641	0.450	0.573	0.263	0.491
	Right Tilted	0.148	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.615	0.229	0.649	0.269	0.768	0.190	0.277
	Left Cheek	0.386	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.939	1.130	1.255	0.823	0.904	0.520	1.237
	Left Tilted	0.173	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.874	0.443	0.938	0.249	0.509	0.259	0.594
CDMA BC0_Ant 0	Right Cheek	0.302	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.751	0.421	0.707	0.516	0.639	0.329	0.557
	Right Tilted	0.178	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.645	0.259	0.679	0.299	0.798	0.220	0.307
	Left Cheek	0.401	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.954	1.145	1.270	0.838	0.919	0.535	1.252
	Left Tilted	0.208	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.909	0.478	0.973	0.284	0.544	0.294	0.629
CDMA BC1_Ant 2	Right Cheek	0.216	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.665	0.335	0.621	0.430	0.553	0.243	0.471
	Right Tilted	0.160	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.627	0.241	0.661	0.281	0.780	0.202	0.289
	Left Cheek	0.302	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.855	1.046	1.171	0.739	0.820	0.436	1.153
	Left Tilted	0.141	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.842	0.411	0.906	0.217	0.477	0.227	0.562
CDMA BC10_Ant 0	Right Cheek	0.271	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.720	0.390	0.676	0.485	0.608	0.298	0.526
	Right Tilted	0.165	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.632	0.246	0.666	0.286	0.785	0.207	0.294
	Left Cheek	0.377	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.930	1.121	1.246	0.814	0.895	0.511	1.228
	Left Tilted	0.213	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.914	0.483	0.978	0.289	0.549	0.299	0.634
LTE Band 7_Ant 2	Right Cheek	0.519	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.968	0.638	0.924	0.733	0.856	0.546	0.774
	Right Tilted	0.138	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.605	0.219	0.639	0.259	0.758	0.180	0.267
	Left Cheek	0.342	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.895	1.086	1.211	0.779	0.860	0.476	1.193
	Left Tilted	0.194	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.895	0.464	0.959	0.270	0.530	0.280	0.615
LTE Band 12_Ant 0	Right Cheek	0.229	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.678	0.348	0.634	0.443	0.566	0.256	0.484
	Right Tilted	0.160	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.627	0.241	0.661	0.281	0.780	0.202	0.289
	Left Cheek	0.328	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.881	1.072	1.197	0.765	0.846	0.462	1.179
	Left Tilted	0.225	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.926	0.495	0.990	0.301	0.561	0.311	0.646
LTE Band 13_Ant 0	Right Cheek	0.207	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.656	0.326	0.612	0.421	0.544	0.234	0.462
	Right Tilted	0.122	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.589	0.203	0.623	0.243	0.742	0.164	0.251
	Left Cheek	0.295	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.848	1.039	1.164	0.732	0.813	0.429	1.146
	Left Tilted	0.188	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.889	0.458	0.953	0.264	0.524	0.274	0.609
LTE Band 14_Ant 0	Right Cheek	0.192	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.641	0.311	0.597	0.406	0.529	0.219	0.447
	Right Tilted	0.120	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.587	0.201	0.621	0.241	0.740	0.162	0.249
	Left Cheek	0.314	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.867	1.058	1.183	0.751	0.832	0.448	1.165
	Left Tilted	0.194	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.895	0.464	0.959	0.270	0.530	0.280	0.615



FCC SAR TEST REPORT

Report No. : FA001507-01A

LTE Band 25_Ant 2	Right Cheek	0.384	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.833	0.503	0.789	0.598	0.721	0.411	0.639
	Right Tilted	0.199	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.666	0.280	0.700	0.320	0.819	0.241	0.328
	Left Cheek	0.289	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.842	1.033	1.158	0.726	0.807	0.423	1.140
	Left Tilted	0.174	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.875	0.444	0.939	0.250	0.510	0.260	0.595
LTE Band 26_Ant 0	Right Cheek	0.235	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.684	0.354	0.640	0.449	0.572	0.262	0.490
	Right Tilted	0.133	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.600	0.214	0.634	0.254	0.753	0.175	0.262
	Left Cheek	0.336	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.889	1.080	1.205	0.773	0.854	0.470	1.187
	Left Tilted	0.177	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.878	0.447	0.942	0.253	0.513	0.263	0.598
LTE Band 30_Ant 2	Right Cheek	0.225	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.674	0.344	0.630	0.439	0.562	0.252	0.480
	Right Tilted	0.082	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.549	0.163	0.583	0.203	0.702	0.124	0.211
	Left Cheek	0.150	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.703	0.894	1.019	0.587	0.668	0.284	1.001
	Left Tilted	0.117	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.818	0.387	0.882	0.193	0.453	0.203	0.538
LTE Band 41_Ant 2	Right Cheek	0.309	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.758	0.428	0.714	0.523	0.646	0.336	0.564
	Right Tilted	0.091	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.558	0.172	0.592	0.212	0.711	0.133	0.220
	Left Cheek	0.202	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.755	0.946	1.071	0.639	0.720	0.336	1.053
	Left Tilted	0.193	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.894	0.463	0.958	0.269	0.529	0.279	0.614
LTE Band 48_Ant 7	Right Cheek	0.231	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.680	0.350	0.636	0.445	0.568	0.258	0.486
	Right Tilted	0.256	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.723	0.337	0.757	0.377	0.876	0.298	0.385
	Left Cheek	0.471	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.024	1.215	1.340	0.908	0.989	0.605	1.322
	Left Tilted	0.162	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.863	0.432	0.927	0.238	0.498	0.248	0.583
LTE Band 66_Ant 2	Right Cheek	0.276	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.725	0.395	0.681	0.490	0.613	0.303	0.531
	Right Tilted	0.212	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.679	0.293	0.713	0.333	0.832	0.254	0.341
	Left Cheek	0.381	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.934	1.125	1.250	0.818	0.899	0.515	1.232
	Left Tilted	0.183	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.884	0.453	0.948	0.259	0.519	0.269	0.604
LTE Band 71_Ant 0	Right Cheek	0.232	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.681	0.351	0.637	0.446	0.569	0.259	0.487
	Right Tilted	0.127	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.594	0.208	0.628	0.248	0.747	0.169	0.256
	Left Cheek	0.274	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.827	1.018	1.143	0.711	0.792	0.408	1.125
	Left Tilted	0.162	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.863	0.432	0.927	0.238	0.498	0.248	0.583

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM850_Ant 1	Right Cheek	0.826	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.275	0.945	1.231	1.040	1.163	0.853	1.081
	Right Tilted	0.564	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.031	0.645	1.065	0.685	1.184	0.606	0.693
	Left Cheek	0.420	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.973	1.164	1.289	0.857	0.938	0.554	1.271
	Left Tilted	0.358	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.059	0.628	1.123	0.434	0.694	0.444	0.779
GSM1900_Ant 0	Right Cheek	0.088	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.537	0.207	0.493	0.302	0.425	0.115	0.343
	Right Tilted	0.095	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.562	0.176	0.596	0.216	0.715	0.137	0.224
	Left Cheek	0.188	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.741	0.932	1.057	0.625	0.706	0.322	1.039
	Left Tilted	0.091	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.792	0.361	0.856	0.167	0.427	0.177	0.512
WCDMA II_Ant 0	Right Cheek	0.180	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.629	0.299	0.585	0.394	0.517	0.207	0.435
	Right Tilted	0.149	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.616	0.230	0.650	0.270	0.769	0.191	0.278
	Left Cheek	0.380	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.933	1.124	1.249	0.817	0.898	0.514	1.231
	Left Tilted	0.118	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.819	0.388	0.883	0.194	0.454	0.204	0.539
WCDMA IV_Ant 0	Right Cheek	0.299	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.748	0.418	0.704	0.513	0.636	0.326	0.554
	Right Tilted	0.266	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.733	0.347	0.767	0.387	0.886	0.308	0.395
	Left Cheek	0.595	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.148	1.339	1.464	1.032	1.113	0.729	1.446
	Left Tilted	0.279	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.980	0.549	1.044	0.355	0.615	0.365	0.700
WCDMA V_Ant 1	Right Cheek	0.967	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.416	1.086	1.372	1.181	1.304	0.994	1.222
	Right Tilted	0.694	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.161	0.775	1.195	0.815	1.314	0.736	0.823
	Left Cheek	0.583	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.136	1.327	1.452	1.020	1.101	0.717	1.434
	Left Tilted	0.365	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.066	0.635	1.130	0.441	0.701	0.451	0.786



FCC SAR TEST REPORT

Report No. : FA001507-01A

CDMA BC0_Ant 1	Right Cheek	0.974	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.423	1.093	1.379	1.188	1.311	1.001	1.229
	Right Tilted	0.729	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.196	0.810	1.230	0.850	1.349	0.771	0.858
	Left Cheek	0.526	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.079	1.270	1.395	0.963	1.044	0.660	1.377
	Left Tilted	0.452	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.153	0.722	1.217	0.528	0.788	0.538	0.873
CDMA BC1_Ant 0	Right Cheek	0.221	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.670	0.340	0.626	0.435	0.558	0.248	0.476
	Right Tilted	0.192	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.659	0.273	0.693	0.313	0.812	0.234	0.321
	Left Cheek	0.498	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.051	1.242	1.367	0.935	1.016	0.632	1.349
	Left Tilted	0.240	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.941	0.510	1.005	0.316	0.576	0.326	0.661
CDMA BC10_Ant 1	Right Cheek	0.986	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.435	1.105	1.391	1.200	1.323	1.013	1.241
	Right Tilted	0.798	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.265	0.879	1.299	0.919	1.418	0.840	0.927
	Left Cheek	0.570	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.123	1.314	1.439	1.007	1.088	0.704	1.421
	Left Tilted	0.498	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.199	0.768	1.263	0.574	0.834	0.584	0.919
LTE Band 7_Ant 0	Right Cheek	0.088	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.537	0.207	0.493	0.302	0.425	0.115	0.343
	Right Tilted	0.068	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.535	0.149	0.569	0.189	0.688	0.110	0.197
	Left Cheek	0.173	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.726	0.917	1.042	0.610	0.691	0.307	1.024
	Left Tilted	0.056	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.757	0.326	0.821	0.132	0.392	0.142	0.477
LTE Band 12_Ant 1	Right Cheek	0.820	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.269	0.939	1.225	1.034	1.157	0.847	1.075
	Right Tilted	0.691	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.158	0.772	1.192	0.812	1.311	0.733	0.820
	Left Cheek	0.407	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.960	1.151	1.276	0.844	0.925	0.541	1.258
	Left Tilted	0.393	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.094	0.663	1.158	0.469	0.729	0.479	0.814
LTE Band 13_Ant 1	Right Cheek	0.749	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.198	0.868	1.154	0.963	1.086	0.776	1.004
	Right Tilted	0.653	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.120	0.734	1.154	0.774	1.273	0.695	0.782
	Left Cheek	0.452	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.005	1.196	1.321	0.889	0.970	0.586	1.303
	Left Tilted	0.400	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.101	0.670	1.165	0.476	0.736	0.486	0.821
LTE Band 14_Ant 1	Right Cheek	0.643	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.092	0.762	1.048	0.857	0.980	0.670	0.898
	Right Tilted	0.564	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.031	0.645	1.065	0.685	1.184	0.606	0.693
	Left Cheek	0.385	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.938	1.129	1.254	0.822	0.903	0.519	1.236
	Left Tilted	0.385	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.086	0.655	1.150	0.461	0.721	0.471	0.806
LTE Band 25_Ant 0	Right Cheek	0.239	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.688	0.358	0.644	0.453	0.576	0.266	0.494
	Right Tilted	0.252	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.719	0.333	0.753	0.373	0.872	0.294	0.381
	Left Cheek	0.532	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.085	1.276	1.401	0.969	1.050	0.666	1.383
	Left Tilted	0.257	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.958	0.527	1.022	0.333	0.593	0.343	0.678
LTE Band 26_Ant 1	Right Cheek	0.857	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.306	0.976	1.262	1.071	1.194	0.884	1.112
	Right Tilted	0.651	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.118	0.732	1.152	0.772	1.271	0.693	0.780
	Left Cheek	0.473	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.026	1.217	1.342	0.910	0.991	0.607	1.324
	Left Tilted	0.402	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.103	0.672	1.167	0.478	0.738	0.488	0.823
LTE Band 30_Ant 0	Right Cheek	0.215	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.664	0.334	0.620	0.429	0.552	0.242	0.470
	Right Tilted	0.143	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.610	0.224	0.644	0.264	0.763	0.185	0.272
	Left Cheek	0.331	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.884	1.075	1.200	0.768	0.849	0.465	1.182
	Left Tilted	0.149	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.850	0.419	0.914	0.225	0.485	0.235	0.570
LTE Band 41_Ant 0	Right Cheek	0.043	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.492	0.162	0.448	0.257	0.380	0.070	0.298
	Right Tilted	0.029	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.496	0.110	0.530	0.150	0.649	0.071	0.158
	Left Cheek	0.111	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.664	0.855	0.980	0.548	0.629	0.245	0.962
	Left Tilted	0.019	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.720	0.289	0.784	0.095	0.355	0.105	0.440
LTE Band 48_Ant 2	Right Cheek	0.061	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.510	0.180	0.466	0.275	0.398	0.088	0.316
	Right Tilted	0.037	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.504	0.118	0.538	0.158	0.657	0.079	0.166
	Left Cheek	0.027	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.580	0.771	0.896	0.464	0.545	0.161	0.878
	Left Tilted	0.006	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.707	0.276	0.771	0.082	0.342	0.092	0.427
LTE Band 66_Ant 0	Right Cheek	0.232	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.681	0.351	0.637	0.446	0.569	0.259	0.487
	Right Tilted	0.222	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.689	0.303	0.723	0.343	0.842	0.264	0.351
	Left Cheek	0.487	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.040	1.231	1.356	0.924	1.005	0.621	1.338
	Left Tilted	0.222	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.923	0.492	0.987	0.298	0.558	0.308	0.643
LTE Band 71_Ant 1	Right Cheek	0.480	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.929	0.599	0.885	0.694	0.817	0.507	0.735
	Right Tilted	0.425	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.892	0.506	0.926	0.546	1.045	0.467	0.554
	Left Cheek	0.224	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.777	0.968	1.093	0.661	0.742	0.358	1.075
	Left Tilted	0.212	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.913	0.482	0.977	0.288	0.548	0.298	0.633



WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
FR1 n5_Ant 0	Right Cheek	0.125	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.574	0.244	0.530	0.339	0.462	0.152	0.380
	Right Tilted	0.075	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.542	0.156	0.576	0.196	0.695	0.117	0.204
	Left Cheek	0.181	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.734	0.925	1.050	0.618	0.699	0.315	1.032
	Left Tilted	0.092	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.793	0.362	0.857	0.168	0.428	0.178	0.513
FR1 n5_Ant 1	Right Cheek	0.836	0.163	0.214	0.422	0.092	0.337	0.378	0.027	1.285	0.955	1.241	1.050	1.173	0.863	1.091
	Right Tilted	0.681	0.090	0.121	0.425	0.039	0.620	0.459	0.042	1.148	0.762	1.182	0.802	1.301	0.723	0.810
	Left Cheek	0.553	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.106	1.297	1.422	0.990	1.071	0.687	1.404
	Left Tilted	0.517	0.237	0.076	0.615	0.184	0.336	0.679	0.086	1.218	0.787	1.282	0.593	0.853	0.603	0.938
FR1 n12_Ant 0	Right Cheek	0.079	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.528	0.198	0.484	0.293	0.416	0.106	0.334
	Right Tilted	0.011	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.478	0.092	0.512	0.132	0.631	0.053	0.140
	Left Cheek	0.093	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.646	0.837	0.962	0.530	0.611	0.227	0.944
	Left Tilted	0.013	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.714	0.283	0.778	0.089	0.349	0.099	0.434
FR1 n12_Ant 1	Right Cheek	0.493	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.942	0.612	0.898	0.707	0.830	0.520	0.748
	Right Tilted	0.415	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.882	0.496	0.916	0.536	1.035	0.457	0.544
	Left Cheek	0.203	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.756	0.947	1.072	0.640	0.721	0.337	1.054
	Left Tilted	0.168	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.869	0.438	0.933	0.244	0.504	0.254	0.589
FR1 n25_Ant 2	Right Cheek	0.287	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.736	0.406	0.692	0.501	0.624	0.314	0.542
	Right Tilted	0.185	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.652	0.266	0.686	0.306	0.805	0.227	0.314
	Left Cheek	0.302	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.855	1.046	1.171	0.739	0.820	0.436	1.153
	Left Tilted	0.147	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.848	0.417	0.912	0.223	0.483	0.233	0.568
FR1 n25_Ant 0	Right Cheek	0.213	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.662	0.332	0.618	0.427	0.550	0.240	0.468
	Right Tilted	0.175	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.642	0.256	0.676	0.296	0.795	0.217	0.304
	Left Cheek	0.442	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.995	1.186	1.311	0.879	0.960	0.576	1.293
	Left Tilted	0.217	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.918	0.487	0.982	0.293	0.553	0.303	0.638
FR1 n41_Ant 2	Right Cheek	0.163	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.612	0.282	0.568	0.377	0.500	0.190	0.418
	Right Tilted	0.083	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.550	0.164	0.584	0.204	0.703	0.125	0.212
	Left Cheek	0.135	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.688	0.879	1.004	0.572	0.653	0.269	0.986
	Left Tilted	0.105	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.806	0.375	0.870	0.181	0.441	0.191	0.526
FR1 n41_Ant 5	Right Cheek	0.092	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.541	0.211	0.497	0.306	0.429	0.119	0.347
	Right Tilted	0.002	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.469	0.083	0.503	0.123	0.622	0.044	0.131
	Left Cheek	0.415	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.968	1.159	1.284	0.852	0.933	0.549	1.266
	Left Tilted	0.002	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.703	0.272	0.767	0.078	0.338	0.088	0.423
FR1 n41_Ant 0	Right Cheek	0.015	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.464	0.134	0.420	0.229	0.352	0.042	0.270
	Right Tilted	0.002	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.469	0.083	0.503	0.123	0.622	0.044	0.131
	Left Cheek	0.032	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.585	0.776	0.901	0.469	0.550	0.166	0.883
	Left Tilted	0.002	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.703	0.272	0.767	0.078	0.338	0.088	0.423
FR1 n66_Ant 2	Right Cheek	0.318	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.767	0.437	0.723	0.532	0.655	0.345	0.573
	Right Tilted	0.226	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.693	0.307	0.727	0.347	0.846	0.268	0.355
	Left Cheek	0.402	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.955	1.146	1.271	0.839	0.920	0.536	1.253
	Left Tilted	0.209	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.910	0.479	0.974	0.285	0.545	0.295	0.630
FR1 n66_Ant 0	Right Cheek	0.247	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.696	0.366	0.652	0.461	0.584	0.274	0.502
	Right Tilted	0.234	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.701	0.315	0.735	0.355	0.854	0.276	0.363
	Left Cheek	0.492	0.241	0.437	0.419	0.610	0.518	0.735	0.134	1.045	1.236	1.361	0.929	1.010	0.626	1.343
	Left Tilted	0.250	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.951	0.520	1.015	0.326	0.586	0.336	0.671
FR1 n71_Ant 0	Right Cheek	0.092	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.541	0.211	0.497	0.306	0.429	0.119	0.347
	Right Tilted	0.015	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.482	0.096	0.516	0.136	0.635	0.057	0.144
	Left Cheek	0.126	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.679	0.870	0.995	0.563	0.644	0.260	0.977
	Left Tilted	0.082	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.783	0.352	0.847	0.158	0.418	0.168	0.503



FCC SAR TEST REPORT

Report No. : FA001507-01A

FR1 n71_Ant 1	Right Cheek	0.543	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.992	0.662	0.948	0.757	0.880	0.570	0.798
	Right Tilted	0.485	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.952	0.566	0.986	0.606	1.105	0.527	0.614
	Left Cheek	0.309	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.862	1.053	1.178	0.746	0.827	0.443	1.160
	Left Tilted	0.288	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.989	0.558	1.053	0.364	0.624	0.374	0.709
FR1 n77_Ant 7	Right Cheek	0.248	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.697	0.367	0.653	0.462	0.585	0.275	0.503
	Right Tilted	0.293	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.760	0.374	0.794	0.414	0.913	0.335	0.422
	Left Cheek	0.340	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.893	1.084	1.209	0.777	0.858	0.474	1.191
	Left Tilted	0.193	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.894	0.463	0.958	0.269	0.529	0.279	0.614
FR1 n77_Ant 2	Right Cheek	0.135	0.163	0.214	0.422	0.092	0.337	0.378	0.027	0.584	0.254	0.540	0.349	0.472	0.162	0.390
	Right Tilted	0.092	0.090	0.121	0.425	0.039	0.620	0.459	0.042	0.559	0.173	0.593	0.213	0.712	0.134	0.221
	Left Cheek	0.086	0.241	0.437	0.419	0.610	0.518	0.735	0.134	0.639	0.830	0.955	0.523	0.604	0.220	0.937
	Left Tilted	0.002	0.237	0.076	0.615	0.184	0.336	0.679	0.086	0.703	0.272	0.767	0.078	0.338	0.088	0.423

**16.3 Hotspot Exposure Conditions**

<Simultaneous Transmission is active_WWAN ON>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 3 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 3 1g SAR (W/kg)	2.4GHz WLAN Ant 4+3 1g SAR (W/kg)	5GHz WLAN Ant 4+3 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)							
GSM850_Ant 0	Front	0.340	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.514	0.452	0.509	0.480	0.561	0.398	0.582
	Back	0.441	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.914	0.685	0.819	0.771	0.842	0.543	0.859
	Left side	0.551		0.238		0.246	0.259	0.388		0.551	0.797	0.939	0.789	0.810	0.551	0.797
	Right side	0.284	0.178		0.359		0.113	0.347	0.056	0.699	0.340	0.687	0.284	0.397	0.340	0.462
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.338								0.338	0.338	0.338	0.338	0.338	0.338	0.338
GSM1900_Ant 2	Front	0.387	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.561	0.499	0.556	0.527	0.608	0.445	0.629
	Back	0.528	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.001	0.772	0.906	0.858	0.929	0.630	0.946
	Left side	0.141		0.238		0.246	0.259	0.388		0.141	0.387	0.529	0.379	0.400	0.141	0.387
	Right side	0.249	0.178		0.359		0.113	0.347	0.056	0.664	0.305	0.652	0.249	0.362	0.305	0.427
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.786								0.786	0.786	0.786	0.786	0.786	0.786	0.786
WCDMA II_Ant 2	Front	0.574	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.748	0.686	0.743	0.714	0.795	0.632	0.816
	Back	0.853	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.326	1.097	1.231	1.183	1.254	0.955	1.271
	Left side	0.192		0.238		0.246	0.259	0.388		0.192	0.438	0.580	0.430	0.451	0.192	0.438
	Right side	0.384	0.178		0.359		0.113	0.347	0.056	0.799	0.440	0.787	0.384	0.497	0.440	0.562
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.832								0.832	0.832	0.832	0.832	0.832	0.832	0.832
WCDMA IV_Ant 2	Front	0.590	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.764	0.702	0.759	0.730	0.811	0.648	0.832
	Back	0.612	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.085	0.856	0.990	0.942	1.013	0.714	1.030
	Left side	0.124		0.238		0.246	0.259	0.388		0.124	0.370	0.512	0.362	0.383	0.124	0.370
	Right side	0.487	0.178		0.359		0.113	0.347	0.056	0.902	0.543	0.890	0.487	0.600	0.543	0.665
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.679								0.679	0.679	0.679	0.679	0.679	0.679	0.679
WCDMA V_Ant 0	Front	0.330	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.504	0.442	0.499	0.470	0.551	0.388	0.572
	Back	0.455	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.928	0.699	0.833	0.785	0.856	0.557	0.873
	Left side	0.507		0.238		0.246	0.259	0.388		0.507	0.753	0.895	0.745	0.766	0.507	0.753
	Right side	0.279	0.178		0.359		0.113	0.347	0.056	0.694	0.335	0.682	0.279	0.392	0.335	0.457
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.296								0.296	0.296	0.296	0.296	0.296	0.296	0.296
CDMA BC0_Ant 0	Front	0.331	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.505	0.443	0.500	0.471	0.552	0.389	0.573
	Back	0.468	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.941	0.712	0.846	0.798	0.869	0.570	0.886
	Left side	0.487		0.238		0.246	0.259	0.388		0.487	0.733	0.875	0.725	0.746	0.487	0.733
	Right side	0.263	0.178		0.359		0.113	0.347	0.056	0.678	0.319	0.666	0.263	0.376	0.319	0.441
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.312								0.312	0.312	0.312	0.312	0.312	0.312	0.312
CDMA BC1_Ant 2	Front	0.551	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.725	0.663	0.720	0.691	0.772	0.609	0.793
	Back	0.801	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.274	1.045	1.179	1.131	1.202	0.903	1.219
	Left side	0.168		0.238		0.246	0.259	0.388		0.168	0.414	0.556	0.406	0.427	0.168	0.414
	Right side	0.350	0.178		0.359		0.113	0.347	0.056	0.765	0.406	0.753	0.350	0.463	0.406	0.528
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.784								0.784	0.784	0.784	0.784	0.784	0.784	0.784
CDMA BC10_Ant 0	Front	0.348	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.522	0.460	0.517	0.488	0.569	0.406	0.590
	Back	0.443	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.916	0.687	0.821	0.773	0.844	0.545	0.861
	Left side	0.457		0.238		0.246	0.259	0.388		0.457	0.703	0.845	0.695	0.716	0.457	0.703
	Right side	0.276	0.178		0.359		0.113	0.347	0.056	0.691	0.332	0.679	0.276	0.389	0.332	0.454
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.288								0.288	0.288	0.288	0.288	0.288	0.288	0.288
LTE Band 7_Ant 2	Front	0.518	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.692	0.630	0.687	0.658	0.739	0.576	0.760
	Back	0.676	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.149	0.920	1.054	1.006	1.077	0.778	1.094



FCC SAR TEST REPORT

Report No. : FA001507-01A

	Left side	0.126		0.238		0.246	0.259	0.388		0.126	0.372	0.514	0.364	0.385	0.126	0.372
	Right side	0.298	0.178		0.359		0.113	0.347	0.056	0.713	0.354	0.701	0.298	0.411	0.354	0.476
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.731								0.731	0.731	0.731	0.731	0.731	0.731	0.731
LTE Band 12_Ant 0	Front	0.349	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.523	0.461	0.518	0.489	0.570	0.407	0.591
	Back	0.470	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.943	0.714	0.848	0.800	0.871	0.572	0.888
	Left side	0.453		0.238		0.246	0.259	0.388		0.453	0.699	0.841	0.691	0.712	0.453	0.699
	Right side	0.281	0.178		0.359		0.113	0.347	0.056	0.696	0.337	0.684	0.281	0.394	0.337	0.459
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.128								0.128	0.128	0.128	0.128	0.128	0.128	0.128
LTE Band 13_Ant 0	Front	0.310	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.484	0.422	0.479	0.450	0.531	0.368	0.552
	Back	0.375	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.848	0.619	0.753	0.705	0.776	0.477	0.793
	Left side	0.335		0.238		0.246	0.259	0.388		0.335	0.581	0.723	0.573	0.594	0.335	0.581
	Right side	0.290	0.178		0.359		0.113	0.347	0.056	0.705	0.346	0.693	0.290	0.403	0.346	0.468
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.161								0.161	0.161	0.161	0.161	0.161	0.161	0.161
LTE Band 14_Ant 0	Front	0.336	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.510	0.448	0.505	0.476	0.557	0.394	0.578
	Back	0.362	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.835	0.606	0.740	0.692	0.763	0.464	0.780
	Left side	0.354		0.238		0.246	0.259	0.388		0.354	0.600	0.742	0.592	0.613	0.354	0.600
	Right side	0.298	0.178		0.359		0.113	0.347	0.056	0.713	0.354	0.701	0.298	0.411	0.354	0.476
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.187								0.187	0.187	0.187	0.187	0.187	0.187	0.187
LTE Band 25_Ant 2	Front	0.583	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.757	0.695	0.752	0.723	0.804	0.641	0.825
	Back	0.710	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.183	0.954	1.088	1.040	1.111	0.812	1.128
	Left side	0.105		0.238		0.246	0.259	0.388		0.105	0.351	0.493	0.343	0.364	0.105	0.351
	Right side	0.299	0.178		0.359		0.113	0.347	0.056	0.714	0.355	0.702	0.299	0.412	0.355	0.477
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.817								0.817	0.817	0.817	0.817	0.817	0.817	0.817
LTE Band 26_Ant 0	Front	0.300	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.474	0.412	0.469	0.440	0.521	0.358	0.542
	Back	0.403	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.876	0.647	0.781	0.733	0.804	0.505	0.821
	Left side	0.411		0.238		0.246	0.259	0.388		0.411	0.657	0.799	0.649	0.670	0.411	0.657
	Right side	0.234	0.178		0.359		0.113	0.347	0.056	0.649	0.290	0.637	0.234	0.347	0.290	0.412
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.277								0.277	0.277	0.277	0.277	0.277	0.277	0.277
LTE Band 30_Ant 2	Front	0.644	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.818	0.756	0.813	0.784	0.865	0.702	0.886
	Back	0.860	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.333	1.104	1.238	1.190	1.261	0.962	1.278
	Left side	0.085		0.238		0.246	0.259	0.388		0.085	0.331	0.473	0.323	0.344	0.085	0.331
	Right side	0.408	0.178		0.359		0.113	0.347	0.056	0.823	0.464	0.811	0.408	0.521	0.464	0.586
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.734								0.734	0.734	0.734	0.734	0.734	0.734	0.734
LTE Band 41_Ant 2	Front	0.616	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.790	0.728	0.785	0.756	0.837	0.674	0.858
	Back	0.907	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.380	1.151	1.285	1.237	1.308	1.009	1.325
	Left side	0.125		0.238		0.246	0.259	0.388		0.125	0.371	0.513	0.363	0.384	0.125	0.371
	Right side	0.415	0.178		0.359		0.113	0.347	0.056	0.830	0.471	0.818	0.415	0.528	0.471	0.593
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.831								0.831	0.831	0.831	0.831	0.831	0.831	0.831
LTE Band 48_Ant 7	Front	0.278	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.452	0.390	0.447	0.418	0.499	0.336	0.520
	Back	0.903	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.376	1.147	1.281	1.233	1.304	1.005	1.321
	Left side	0.331		0.238		0.246	0.259	0.388		0.331	0.577	0.719	0.569	0.590	0.331	0.577
	Right side	0.041	0.178		0.359		0.113	0.347	0.056	0.456	0.097	0.444	0.041	0.154	0.097	0.219
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.423								0.423	0.423	0.423	0.423	0.423	0.423	0.423
LTE Band 66_Ant 2	Front	0.717	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.891	0.829	0.886	0.857	0.938	0.775	0.959
	Back	0.828	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.301	1.072	1.206	1.158	1.229	0.930	1.246
	Left side	0.185		0.238		0.246	0.259	0.388		0.185	0.431	0.573	0.423	0.444	0.185	0.431
	Right side	0.498	0.178		0.359		0.113	0.347	0.056	0.913	0.554	0.901	0.498	0.611	0.554	0.676
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.889								0.889	0.889	0.889	0.889	0.889	0.889	0.889
LTE Band 71_Ant 0	Front	0.278	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.452	0.390	0.447	0.418	0.499	0.336	0.520



FCC SAR TEST REPORT

Report No. : FA001507-01A

	Back	0.390	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.863	0.634	0.768	0.720	0.791	0.492	0.808
	Left side	0.349		0.238		0.246	0.259	0.388		0.349	0.595	0.737	0.587	0.608	0.349	0.595
	Right side	0.227	0.178		0.359		0.113	0.347	0.056	0.642	0.283	0.630	0.227	0.340	0.283	0.405
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.086								0.086	0.086	0.086	0.086	0.086	0.086	0.086

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
GSM850_Ant 1	Front	0.197	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.371	0.309	0.366	0.337	0.418	0.255	0.439
	Back	0.387	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.860	0.631	0.765	0.717	0.788	0.489	0.805
	Left side	0.133		0.238		0.246	0.259	0.388		0.133	0.379	0.521	0.371	0.392	0.133	0.379
	Right side	0.128	0.178		0.359		0.113	0.347	0.056	0.543	0.184	0.531	0.128	0.241	0.184	0.306
	Top side	0.178	0.218		0.806		0.235	0.677	0.072	1.056	0.250	0.927	0.178	0.413	0.250	0.396
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
GSM1900_Ant 0	Front	0.222	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.396	0.334	0.391	0.362	0.443	0.280	0.464
	Back	0.493	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.966	0.737	0.871	0.823	0.894	0.595	0.911
	Left side	0.394		0.238		0.246	0.259	0.388		0.394	0.640	0.782	0.632	0.653	0.394	0.640
	Right side	0.027	0.178		0.359		0.113	0.347	0.056	0.442	0.083	0.430	0.027	0.140	0.083	0.205
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.223								0.223	0.223	0.223	0.223	0.223	0.223	0.223
WCDMA II_Ant 0	Front	0.518	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.692	0.630	0.687	0.658	0.739	0.576	0.760
	Back	0.817	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.290	1.061	1.195	1.147	1.218	0.919	1.235
	Left side	0.739		0.238		0.246	0.259	0.388		0.739	0.985	1.127	0.977	0.998	0.739	0.985
	Right side	0.016	0.178		0.359		0.113	0.347	0.056	0.431	0.072	0.419	0.016	0.129	0.072	0.194
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.478								0.478	0.478	0.478	0.478	0.478	0.478	0.478
WCDMA IV_Ant 0	Front	0.365	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.539	0.477	0.534	0.505	0.586	0.423	0.607
	Back	0.906	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.379	1.150	1.284	1.236	1.307	1.008	1.324
	Left side	0.907		0.238		0.246	0.259	0.388		0.907	1.153	1.295	1.145	1.166	0.907	1.153
	Right side	0.010	0.178		0.359		0.113	0.347	0.056	0.425	0.066	0.413	0.010	0.123	0.066	0.188
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.523								0.523	0.523	0.523	0.523	0.523	0.523	0.523
WCDMA V_Ant 1	Front	0.181	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.355	0.293	0.350	0.321	0.402	0.239	0.423
	Back	0.398	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.871	0.642	0.776	0.728	0.799	0.500	0.816
	Left side	0.194		0.238		0.246	0.259	0.388		0.194	0.440	0.582	0.432	0.453	0.194	0.440
	Right side	0.169	0.178		0.359		0.113	0.347	0.056	0.584	0.225	0.572	0.169	0.282	0.225	0.347
	Top side	0.216	0.218		0.806		0.235	0.677	0.072	1.094	0.288	0.965	0.216	0.451	0.288	0.434
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
CDMA BC0_Ant 1	Front	0.248	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.422	0.360	0.417	0.388	0.469	0.306	0.490
	Back	0.496	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.969	0.740	0.874	0.826	0.897	0.598	0.914
	Left side	0.242		0.238		0.246	0.259	0.388		0.242	0.488	0.630	0.480	0.501	0.242	0.488
	Right side	0.207	0.178		0.359		0.113	0.347	0.056	0.622	0.263	0.610	0.207	0.320	0.263	0.385
	Top side	0.339	0.218		0.806		0.235	0.677	0.072	1.217	0.411	1.088	0.339	0.574	0.411	0.557
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
CDMA BC1_Ant 0	Front	0.552	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.726	0.664	0.721	0.692	0.773	0.610	0.794
	Back	0.881	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.354	1.125	1.259	1.211	1.282	0.983	1.299
	Left side	0.717		0.238		0.246	0.259	0.388		0.717	0.963	1.105	0.955	0.976	0.717	0.963
	Right side	0.040	0.178		0.359		0.113	0.347	0.056	0.455	0.096	0.443	0.040	0.153	0.096	0.218
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.388								0.388	0.388	0.388	0.388	0.388	0.388	0.388
CDMA BC10_Ant 1	Front	0.267	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.441	0.379	0.436	0.407	0.488	0.325	0.509
	Back	0.497	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.970	0.741	0.875	0.827	0.898	0.599	0.915



FCC SAR TEST REPORT

Report No. : FA001507-01A

	Left side	0.232		0.238		0.246	0.259	0.388		0.232	0.478	0.620	0.470	0.491	0.232	0.478
	Right side	0.194	0.178		0.359		0.113	0.347	0.056	0.609	0.250	0.597	0.194	0.307	0.250	0.372
	Top side	0.306	0.218		0.806		0.235	0.677	0.072	1.184	0.378	1.055	0.306	0.541	0.378	0.524
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 7_Ant 0	Front	0.177	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.351	0.289	0.346	0.317	0.398	0.235	0.419
	Back	0.337	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.810	0.581	0.715	0.667	0.738	0.439	0.755
	Left side	0.531		0.238		0.246	0.259	0.388		0.531	0.777	0.919	0.769	0.790	0.531	0.777
	Right side	0.036	0.178		0.359		0.113	0.347	0.056	0.451	0.092	0.439	0.036	0.149	0.092	0.214
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.217								0.217	0.217	0.217	0.217	0.217	0.217	0.217
LTE Band 12_Ant 1	Front	0.259	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.433	0.371	0.428	0.399	0.480	0.317	0.501
	Back	0.346	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.819	0.590	0.724	0.676	0.747	0.448	0.764
	Left side	0.441		0.238		0.246	0.259	0.388		0.441	0.687	0.829	0.679	0.700	0.441	0.687
	Right side	0.193	0.178		0.359		0.113	0.347	0.056	0.608	0.249	0.596	0.193	0.306	0.249	0.371
	Top side	0.193	0.218		0.806		0.235	0.677	0.072	1.071	0.265	0.942	0.193	0.428	0.265	0.411
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 13_Ant 1	Front	0.188	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.362	0.300	0.357	0.328	0.409	0.246	0.430
	Back	0.327	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.800	0.571	0.705	0.657	0.728	0.429	0.745
	Left side	0.235		0.238		0.246	0.259	0.388		0.235	0.481	0.623	0.473	0.494	0.235	0.481
	Right side	0.189	0.178		0.359		0.113	0.347	0.056	0.604	0.245	0.592	0.189	0.302	0.245	0.367
	Top side	0.218	0.218		0.806		0.235	0.677	0.072	1.096	0.290	0.967	0.218	0.453	0.290	0.436
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 14_Ant 1	Front	0.146	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.320	0.258	0.315	0.286	0.367	0.204	0.388
	Back	0.289	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.762	0.533	0.667	0.619	0.690	0.391	0.707
	Left side	0.207		0.238		0.246	0.259	0.388		0.207	0.453	0.595	0.445	0.466	0.207	0.453
	Right side	0.155	0.178		0.359		0.113	0.347	0.056	0.570	0.211	0.558	0.155	0.268	0.211	0.333
	Top side	0.172	0.218		0.806		0.235	0.677	0.072	1.050	0.244	0.921	0.172	0.407	0.244	0.390
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 25_Ant 0	Front	0.383	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.557	0.495	0.552	0.523	0.604	0.441	0.625
	Back	0.631	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.104	0.875	1.009	0.961	1.032	0.733	1.049
	Left side	0.987		0.238		0.246	0.259	0.388		0.987	1.233	1.375	1.225	1.246	0.987	1.233
	Right side	0.034	0.178		0.359		0.113	0.347	0.056	0.449	0.090	0.437	0.034	0.147	0.090	0.212
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.333								0.333	0.333	0.333	0.333	0.333	0.333	0.333
LTE Band 26_Ant 1	Front	0.212	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.386	0.324	0.381	0.352	0.433	0.270	0.454
	Back	0.384	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.857	0.628	0.762	0.714	0.785	0.486	0.802
	Left side	0.167		0.238		0.246	0.259	0.388		0.167	0.413	0.555	0.405	0.426	0.167	0.413
	Right side	0.173	0.178		0.359		0.113	0.347	0.056	0.588	0.229	0.576	0.173	0.286	0.229	0.351
	Top side	0.261	0.218		0.806		0.235	0.677	0.072	1.139	0.333	1.010	0.261	0.496	0.333	0.479
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 30_Ant 0	Front	0.563	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.737	0.675	0.732	0.703	0.784	0.621	0.805
	Back	0.774	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.247	1.018	1.152	1.104	1.175	0.876	1.192
	Left side	0.608		0.238		0.246	0.259	0.388		0.608	0.854	0.996	0.846	0.867	0.608	0.854
	Right side	0.061	0.178		0.359		0.113	0.347	0.056	0.476	0.117	0.464	0.061	0.174	0.117	0.239
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.458								0.458	0.458	0.458	0.458	0.458	0.458	0.458
LTE Band 41_Ant 0	Front	0.209	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.383	0.321	0.378	0.349	0.430	0.267	0.451
	Back	0.157	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.630	0.401	0.535	0.487	0.558	0.259	0.575
	Left side	0.308		0.238		0.246	0.259	0.388		0.308	0.554	0.696	0.546	0.567	0.308	0.554
	Right side	0.012	0.178		0.359		0.113	0.347	0.056	0.427	0.068	0.415	0.012	0.125	0.068	0.190
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.099								0.099	0.099	0.099	0.099	0.099	0.099	0.099
LTE Band 48_Ant 2	Front	0.352	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.526	0.464	0.521	0.492	0.573	0.410	0.594
	Back	0.825	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.298	1.069	1.203	1.155	1.226	0.927	1.243
	Left side	0.076		0.238		0.246	0.259	0.388		0.076	0.322	0.464	0.314	0.335	0.076	0.322
	Right side	0.625	0.178		0.359		0.113	0.347	0.056	1.040	0.681	1.028	0.625	0.738	0.681	0.803
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.667								0.667	0.667	0.667	0.667	0.667	0.667	0.667
LTE Band 66_Ant 0	Front	0.388	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.562	0.500	0.557	0.528	0.609	0.446	0.630



FCC SAR TEST REPORT

Report No. : FA001507-01A

	Back	0.842	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.315	1.086	1.220	1.172	1.243	0.944	1.260
	Left side	0.704		0.238		0.246	0.259	0.388		0.704	0.950	1.092	0.942	0.963	0.704	0.950
	Right side	0.063	0.178		0.359		0.113	0.347	0.056	0.478	0.119	0.466	0.063	0.176	0.119	0.241
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.494								0.494	0.494	0.494	0.494	0.494	0.494	0.494
LTE Band 71_Ant 1	Front	0.144	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.318	0.256	0.313	0.284	0.365	0.202	0.386
	Back	0.227	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.700	0.471	0.605	0.557	0.628	0.329	0.645
	Left side	0.330		0.238		0.246	0.259	0.388		0.330	0.576	0.718	0.568	0.589	0.330	0.576
	Right side	0.116	0.178		0.359		0.113	0.347	0.056	0.531	0.172	0.519	0.116	0.229	0.172	0.294
	Top side	0.101	0.218		0.806		0.235	0.677	0.072	0.979	0.173	0.850	0.101	0.336	0.173	0.319
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 4 1g SAR (W/kg)	2.4GHz WLAN Ant 3 1g SAR (W/kg)	5GHz WLAN Ant 4 1g SAR (W/kg)	5GHz WLAN Ant 3 1g SAR (W/kg)	2.4GHz WLAN Ant 4+3 1g SAR (W/kg)	5GHz WLAN Ant 4+3 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)							
FR1 n5_Ant 0	Front	0.144	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.318	0.256	0.313	0.284	0.365	0.202	0.386
	Back	0.319	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.792	0.563	0.697	0.649	0.720	0.421	0.737
	Left side	0.211		0.238		0.246	0.259	0.388		0.211	0.457	0.599	0.449	0.470	0.211	0.457
	Right side	0.096	0.178		0.359		0.113	0.347	0.056	0.511	0.152	0.499	0.096	0.209	0.152	0.274
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.200								0.200	0.200	0.200	0.200	0.200	0.200	0.200
FR1 n5_Ant 1	Front	0.216	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.390	0.328	0.385	0.356	0.437	0.274	0.458
	Back	0.374	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.847	0.618	0.752	0.704	0.775	0.476	0.792
	Left side	0.166		0.238		0.246	0.259	0.388		0.166	0.412	0.554	0.404	0.425	0.166	0.412
	Right side	0.172	0.178		0.359		0.113	0.347	0.056	0.587	0.228	0.575	0.172	0.285	0.228	0.350
	Top side	0.271	0.218		0.806		0.235	0.677	0.072	1.149	0.343	1.020	0.271	0.506	0.343	0.489
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
FR1 n12_Ant 0	Front	0.112	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.286	0.224	0.281	0.252	0.333	0.170	0.354
	Back	0.148	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.621	0.392	0.526	0.478	0.549	0.250	0.566
	Left side	0.172		0.238		0.246	0.259	0.388		0.172	0.418	0.560	0.410	0.431	0.172	0.418
	Right side	0.110	0.178		0.359		0.113	0.347	0.056	0.525	0.166	0.513	0.110	0.223	0.166	0.288
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.037								0.037	0.037	0.037	0.037	0.037	0.037	0.037
FR1 n12_Ant 1	Front	0.133	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.307	0.245	0.302	0.273	0.354	0.191	0.375
	Back	0.184	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.657	0.428	0.562	0.514	0.585	0.286	0.602
	Left side	0.232		0.238		0.246	0.259	0.388		0.232	0.478	0.620	0.470	0.491	0.232	0.478
	Right side	0.128	0.178		0.359		0.113	0.347	0.056	0.543	0.184	0.531	0.128	0.241	0.184	0.306
	Top side	0.094	0.218		0.806		0.235	0.677	0.072	0.972	0.166	0.843	0.094	0.329	0.166	0.312
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
FR1 n25_Ant 2	Front	0.538	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.712	0.650	0.707	0.678	0.759	0.596	0.780
	Back	0.678	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.151	0.922	1.056	1.008	1.079	0.780	1.096
	Left side	0.136		0.238		0.246	0.259	0.388		0.136	0.382	0.524	0.374	0.395	0.136	0.382
	Right side	0.318	0.178		0.359		0.113	0.347	0.056	0.733	0.374	0.721	0.318	0.431	0.374	0.496
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.759								0.759	0.759	0.759	0.759	0.759	0.759	0.759
FR1 n25_Ant 0	Front	0.385	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.559	0.497	0.554	0.525	0.606	0.443	0.627
	Back	0.768	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.241	1.012	1.146	1.098	1.169	0.870	1.186
	Left side	0.701		0.238		0.246	0.259	0.388		0.701	0.947	1.089	0.939	0.960	0.701	0.947
	Right side	0.041	0.178		0.359		0.113	0.347	0.056	0.456	0.097	0.444	0.041	0.154	0.097	0.219
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.301								0.301	0.301	0.301	0.301	0.301	0.301	0.301
FR1 n41_Ant 2	Front	0.296	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.470	0.408	0.465	0.436	0.517	0.354	0.538
	Back	0.449	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.922	0.693	0.827	0.779	0.850	0.551	0.867



FCC SAR TEST REPORT

Report No. : FA001507-01A

	Left side	0.080		0.238		0.246	0.259	0.388		0.080	0.326	0.468	0.318	0.339	0.080	0.326
	Right side	0.211	0.178		0.359		0.113	0.347	0.056	0.626	0.267	0.614	0.211	0.324	0.267	0.389
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.426								0.426	0.426	0.426	0.426	0.426	0.426	0.426
FR1 n41_Ant 5	Front	0.209	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.383	0.321	0.378	0.349	0.430	0.267	0.451
	Back	0.808	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.281	1.052	1.186	1.138	1.209	0.910	1.226
	Left side	0.914		0.238		0.246	0.259	0.388		0.914	1.160	1.302	1.152	1.173	0.914	1.160
	Right side	0.030	0.178		0.359		0.113	0.347	0.056	0.445	0.086	0.433	0.030	0.143	0.086	0.208
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.076								0.076	0.076	0.076	0.076	0.076	0.076	0.076
FR1 n41_Ant 0	Front	0.167	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.341	0.279	0.336	0.307	0.388	0.225	0.409
	Back	0.276	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.749	0.520	0.654	0.606	0.677	0.378	0.694
	Left side	0.081		0.238		0.246	0.259	0.388		0.081	0.327	0.469	0.319	0.340	0.081	0.327
	Right side	0.002	0.178		0.359		0.113	0.347	0.056	0.417	0.058	0.405	0.002	0.115	0.058	0.180
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.174								0.174	0.174	0.174	0.174	0.174	0.174	0.174
FR1 n66_Ant 2	Front	0.653	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.827	0.765	0.822	0.793	0.874	0.711	0.895
	Back	0.707	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.180	0.951	1.085	1.037	1.108	0.809	1.125
	Left side	0.127		0.238		0.246	0.259	0.388		0.127	0.373	0.515	0.365	0.386	0.127	0.373
	Right side	0.458	0.178		0.359		0.113	0.347	0.056	0.873	0.514	0.861	0.458	0.571	0.514	0.636
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.721								0.721	0.721	0.721	0.721	0.721	0.721	0.721
FR1 n66_Ant 0	Front	0.243	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.417	0.355	0.412	0.383	0.464	0.301	0.485
	Back	0.664	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.137	0.908	1.042	0.994	1.065	0.766	1.082
	Left side	0.550		0.238		0.246	0.259	0.388		0.550	0.796	0.938	0.788	0.809	0.550	0.796
	Right side	0.039	0.178		0.359		0.113	0.347	0.056	0.454	0.095	0.442	0.039	0.152	0.095	0.217
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.317								0.317	0.317	0.317	0.317	0.317	0.317	0.317
FR1 n71_Ant 0	Front	0.166	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.340	0.278	0.335	0.306	0.387	0.224	0.408
	Back	0.203	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.676	0.447	0.581	0.533	0.604	0.305	0.621
	Left side	0.262		0.238		0.246	0.259	0.388		0.262	0.508	0.650	0.500	0.521	0.262	0.508
	Right side	0.150	0.178		0.359		0.113	0.347	0.056	0.565	0.206	0.553	0.150	0.263	0.206	0.328
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.074								0.074	0.074	0.074	0.074	0.074	0.074	0.074
FR1 n71_Ant 1	Front	0.148	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.322	0.260	0.317	0.288	0.369	0.206	0.390
	Back	0.229	0.276	0.330	0.371	0.142	0.401	0.276	0.102	0.702	0.473	0.607	0.559	0.630	0.331	0.647
	Left side	0.251		0.238		0.246	0.259	0.388		0.251	0.497	0.639	0.489	0.510	0.251	0.497
	Right side	0.102	0.178		0.359		0.113	0.347	0.056	0.517	0.158	0.505	0.102	0.215	0.158	0.280
	Top side	0.124	0.218		0.806		0.235	0.677	0.072	1.002	0.196	0.873	0.124	0.359	0.196	0.342
	Bottom side									0.000	0.000	0.000	0.000	0.000	0.000	0.000
FR1 n77_Ant 7	Front	0.378	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.552	0.490	0.547	0.518	0.599	0.436	0.620
	Back	0.839	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.312	1.083	1.217	1.169	1.240	0.941	1.257
	Left side	0.700		0.238		0.246	0.259	0.388		0.700	0.946	1.088	0.938	0.959	0.700	0.946
	Right side	0.042	0.178		0.359		0.113	0.347	0.056	0.457	0.098	0.445	0.042	0.155	0.098	0.220
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.296								0.296	0.296	0.296	0.296	0.296	0.296	0.296
FR1 n77_Ant 2	Front	0.292	0.188	0.140	0.116	0.054	0.221	0.111	0.058	0.466	0.404	0.461	0.432	0.513	0.350	0.534
	Back	0.751	0.276	0.330	0.371	0.142	0.401	0.276	0.102	1.224	0.995	1.129	1.081	1.152	0.853	1.169
	Left side	0.044		0.238		0.246	0.259	0.388		0.044	0.290	0.432	0.282	0.303	0.044	0.290
	Right side	0.307	0.178		0.359		0.113	0.347	0.056	0.722	0.363	0.710	0.307	0.420	0.363	0.485
	Top side		0.218		0.806		0.235	0.677	0.072	0.878	0.072	0.749	0.000	0.235	0.072	0.218
	Bottom side	0.224								0.224	0.224	0.224	0.224	0.224	0.224	0.224

**16.4 Body-Worn Accessory Exposure Conditions****<Standalone_WWAN OFF>**

Exposure Position	1	2	3	4	5	6	7	1+4 Summed 1g SAR (W/kg)	3+7 Summed 1g SAR (W/kg)	4+7 Summed 1g SAR (W/kg)	6+7 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4				
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
Front	0.188	0.140	0.114	0.105	0.221	0.091	0.058	0.293	0.172	0.163	0.149
Back	0.276	0.330	0.371	0.316	0.401	0.276	0.102	0.592	0.473	0.418	0.378

<Simultaneous Transmission is active_WWAN ON>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM850_Ant 0	Front	0.340	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.512	0.446	0.489	0.480	0.561	0.398	0.576
	Back	0.528	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.001	0.814	0.906	0.858	0.929	0.630	0.988
GSM1900_Ant 2	Front	0.387	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.559	0.493	0.536	0.527	0.608	0.445	0.623
	Back	0.595	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.068	0.881	0.973	0.925	0.996	0.697	1.055
WCDMA II_Ant 2	Front	0.574	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.746	0.680	0.723	0.714	0.795	0.632	0.810
	Back	0.853	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.326	1.139	1.231	1.183	1.254	0.955	1.313
WCDMA IV_Ant 2	Front	0.618	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.790	0.724	0.767	0.758	0.839	0.676	0.854
	Back	0.711	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.184	0.997	1.089	1.041	1.112	0.813	1.171
WCDMA V_Ant 0	Front	0.330	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.502	0.436	0.479	0.470	0.551	0.388	0.566
	Back	0.468	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.941	0.754	0.846	0.798	0.869	0.570	0.928
CDMA BC0_Ant 0	Front	0.339	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.511	0.445	0.488	0.479	0.560	0.397	0.575
	Back	0.481	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.954	0.767	0.859	0.811	0.882	0.583	0.941
CDMA BC1_Ant 2	Front	0.529	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.701	0.635	0.678	0.669	0.750	0.587	0.765
	Back	0.818	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.291	1.104	1.196	1.148	1.219	0.920	1.278
CDMA BC10_Ant 0	Front	0.352	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.524	0.458	0.501	0.492	0.573	0.410	0.588
	Back	0.425	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.898	0.711	0.803	0.755	0.826	0.527	0.885
LTE Band 7_Ant 2	Front	0.518	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.690	0.624	0.667	0.658	0.739	0.576	0.754
	Back	0.682	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.155	0.968	1.060	1.012	1.083	0.784	1.142
LTE Band 12_Ant 0	Front	0.349	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.521	0.455	0.498	0.489	0.570	0.407	0.585
	Back	0.470	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.943	0.756	0.848	0.800	0.871	0.572	0.930
LTE Band 13_Ant 0	Front	0.310	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.482	0.416	0.459	0.450	0.531	0.368	0.546
	Back	0.375	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.848	0.661	0.753	0.705	0.776	0.477	0.835
LTE Band 14_Ant 0	Front	0.336	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.508	0.442	0.485	0.476	0.557	0.394	0.572
	Back	0.362	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.835	0.648	0.740	0.692	0.763	0.464	0.822
LTE Band 25_Ant 2	Front	0.639	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.811	0.745	0.788	0.779	0.860	0.697	0.875
	Back	0.778	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.251	1.064	1.156	1.108	1.179	0.880	1.238
LTE Band 26_Ant 0	Front	0.300	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.472	0.406	0.449	0.440	0.521	0.358	0.536
	Back	0.403	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.876	0.689	0.781	0.733	0.804	0.505	0.863
LTE Band 30_Ant 2	Front	0.644	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.816	0.750	0.793	0.784	0.865	0.702	0.880
	Back	0.860	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.333	1.146	1.238	1.190	1.261	0.962	1.320
LTE Band 41_Ant 2	Front	0.616	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.788	0.722	0.765	0.756	0.837	0.674	0.852
	Back	0.907	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.380	1.193	1.285	1.237	1.308	1.009	1.367
LTE Band 48_Ant 7	Front	0.278	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.450	0.384	0.427	0.418	0.499	0.336	0.514
	Back	0.903	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.376	1.189	1.281	1.233	1.304	1.005	1.363
LTE Band 66_Ant 2	Front	0.717	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.889	0.823	0.866	0.857	0.938	0.775	0.953
	Back	0.828	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.301	1.114	1.206	1.158	1.229	0.930	1.288
LTE Band 71_Ant 0	Front	0.278	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.450	0.384	0.427	0.418	0.499	0.336	0.514
	Back	0.390	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.863	0.676	0.768	0.720	0.791	0.492	0.850



WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
GSM850_Ant 1	Front	0.197	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.369	0.303	0.346	0.337	0.418	0.255	0.433
	Back	0.387	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.860	0.673	0.765	0.717	0.788	0.489	0.847
GSM1900_Ant 0	Front	0.222	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.394	0.328	0.371	0.362	0.443	0.280	0.458
	Back	0.493	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.966	0.779	0.871	0.823	0.894	0.595	0.953
WCDMA II_Ant 0	Front	0.518	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.690	0.624	0.667	0.658	0.739	0.576	0.754
	Back	0.817	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.290	1.103	1.195	1.147	1.218	0.919	1.277
WCDMA IV_Ant 0	Front	0.365	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.537	0.471	0.514	0.505	0.586	0.423	0.601
	Back	0.906	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.379	1.192	1.284	1.236	1.307	1.008	1.366
WCDMA V_Ant 1	Front	0.181	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.353	0.287	0.330	0.321	0.402	0.239	0.417
	Back	0.398	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.871	0.684	0.776	0.728	0.799	0.500	0.858
CDMA BC0_Ant 1	Front	0.277	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.449	0.383	0.426	0.417	0.498	0.335	0.513
	Back	0.506	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.979	0.792	0.884	0.836	0.907	0.608	0.966
CDMA BC1_Ant 0	Front	0.499	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.671	0.605	0.648	0.639	0.720	0.557	0.735
	Back	0.904	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.377	1.190	1.282	1.234	1.305	1.006	1.364
CDMA BC10_Ant 1	Front	0.220	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.392	0.326	0.369	0.360	0.441	0.278	0.456
	Back	0.464	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.937	0.750	0.842	0.794	0.865	0.566	0.924
LTE Band 7_Ant 0	Front	0.177	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.349	0.283	0.326	0.317	0.398	0.235	0.413
	Back	0.337	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.810	0.623	0.715	0.667	0.738	0.439	0.797
LTE Band 12_Ant 1	Front	0.259	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.431	0.365	0.408	0.399	0.480	0.317	0.495
	Back	0.346	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.819	0.632	0.724	0.676	0.747	0.448	0.806
LTE Band 13_Ant 1	Front	0.188	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.360	0.294	0.337	0.328	0.409	0.246	0.424
	Back	0.327	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.800	0.613	0.705	0.657	0.728	0.429	0.787
LTE Band 14_Ant 1	Front	0.146	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.318	0.252	0.295	0.286	0.367	0.204	0.382
	Back	0.289	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.762	0.575	0.667	0.619	0.690	0.391	0.749
LTE Band 25_Ant 0	Front	0.435	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.607	0.541	0.584	0.575	0.656	0.493	0.671
	Back	0.859	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.332	1.145	1.237	1.189	1.260	0.961	1.319
LTE Band 26_Ant 1	Front	0.212	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.384	0.318	0.361	0.352	0.433	0.270	0.448
	Back	0.384	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.857	0.670	0.762	0.714	0.785	0.486	0.844
LTE Band 30_Ant 0	Front	0.563	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.735	0.669	0.712	0.703	0.784	0.621	0.799
	Back	0.774	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.247	1.060	1.152	1.104	1.175	0.876	1.234
LTE Band 41_Ant 0	Front	0.079	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.251	0.185	0.228	0.219	0.300	0.137	0.315
	Back	0.187	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.660	0.473	0.565	0.517	0.588	0.289	0.647
LTE Band 48_Ant 2	Front	0.352	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.524	0.458	0.501	0.492	0.573	0.410	0.588
	Back	0.825	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.298	1.111	1.203	1.155	1.226	0.927	1.285
LTE Band 66_Ant 0	Front	0.388	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.560	0.494	0.537	0.528	0.609	0.446	0.624
	Back	0.842	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.315	1.128	1.220	1.172	1.243	0.944	1.302
LTE Band 71_Ant 1	Front	0.144	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.316	0.250	0.293	0.284	0.365	0.202	0.380
	Back	0.227	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.700	0.513	0.605	0.557	0.628	0.329	0.687



WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	1+4+8 Summed 1g SAR (W/kg)	1+5+8 Summed 1g SAR (W/kg)	1+7+8 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)	1+8 Summed 1g SAR (W/kg)	1+2+5 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4	2.4GHz WLAN Ant 3	5GHz WLAN Ant 4	5GHz WLAN Ant 3	2.4GHz WLAN Ant 4+3	5GHz WLAN Ant 4+3	Bluetooth Ant 4							
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
FR1 n5_Ant 0	Front	0.144	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.316	0.250	0.293	0.284	0.365	0.202	0.380
	Back	0.319	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.792	0.605	0.697	0.649	0.720	0.421	0.779
FR1 n5_Ant 1	Front	0.216	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.388	0.322	0.365	0.356	0.437	0.274	0.452
	Back	0.374	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.847	0.660	0.752	0.704	0.775	0.476	0.834
FR1 n12_Ant 0	Front	0.112	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.284	0.218	0.261	0.252	0.333	0.170	0.348
	Back	0.148	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.621	0.434	0.526	0.478	0.549	0.250	0.608
FR1 n12_Ant 1	Front	0.133	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.305	0.239	0.282	0.273	0.354	0.191	0.369
	Back	0.184	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.657	0.470	0.562	0.514	0.585	0.286	0.644
FR1 n25_Ant 2	Front	0.590	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.762	0.696	0.739	0.730	0.811	0.648	0.826
	Back	0.782	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.255	1.068	1.160	1.112	1.183	0.884	1.242
FR1 n25_Ant 0	Front	0.385	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.557	0.491	0.534	0.525	0.606	0.443	0.621
	Back	0.768	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.241	1.054	1.146	1.098	1.169	0.870	1.228
FR1 n41_Ant 2	Front	0.296	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.468	0.402	0.445	0.436	0.517	0.354	0.532
	Back	0.449	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.922	0.735	0.827	0.779	0.850	0.551	0.909
FR1 n41_Ant 5	Front	0.258	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.430	0.364	0.407	0.398	0.479	0.316	0.494
	Back	0.994	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.467	1.280	1.372	1.324	1.395	1.096	1.454
FR1 n41_Ant 0	Front	0.167	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.339	0.273	0.316	0.307	0.388	0.225	0.403
	Back	0.276	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.749	0.562	0.654	0.606	0.677	0.378	0.736
FR1 n66_Ant 2	Front	0.653	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.825	0.759	0.802	0.793	0.874	0.711	0.889
	Back	0.766	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.239	1.052	1.144	1.096	1.167	0.868	1.226
FR1 n66_Ant 0	Front	0.243	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.415	0.349	0.392	0.383	0.464	0.301	0.479
	Back	0.664	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.137	0.950	1.042	0.994	1.065	0.766	1.124
FR1 n71_Ant 0	Front	0.166	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.338	0.272	0.315	0.306	0.387	0.224	0.402
	Back	0.203	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.676	0.489	0.581	0.533	0.604	0.305	0.663
FR1 n71_Ant 1	Front	0.148	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.320	0.254	0.297	0.288	0.369	0.206	0.384
	Back	0.229	0.276	0.330	0.371	0.184	0.401	0.276	0.102	0.702	0.515	0.607	0.559	0.630	0.331	0.689
FR1 n77_Ant 7	Front	0.378	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.550	0.484	0.527	0.518	0.599	0.436	0.614
	Back	0.839	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.312	1.125	1.217	1.169	1.240	0.941	1.299
FR1 n77_Ant 2	Front	0.292	0.188	0.140	0.114	0.048	0.221	0.091	0.058	0.464	0.398	0.441	0.432	0.513	0.350	0.528
	Back	0.751	0.276	0.330	0.371	0.184	0.401	0.276	0.102	1.224	1.037	1.129	1.081	1.152	0.853	1.211

17. Supplemental Antenna tuner tests results

General Note:

1. This device implements antenna tuning techniques in the several frequency band and list as below. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching.
2. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values.
3. To evaluate all of the tuner states, the 144 tuner states are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
4. Since the supported frequency span for LTE 2/4/5/17/38 and n2 falls completely within the supported frequency span for LTE 12/25/26/41/66 and n25, and both bands have the same target power and both LTE bands share the same transmission path, therefore standalone SAR was only assessed for LTE 12/25/26/41/66 and n25. The single point SAR time-sweep measurements were treated independently for each supported ACL frequency band. For the LTE 2/4/5/17/38 and n2 single point SAR measurement selected the highest measured SAR configuration and exposure condition of LTE 12/25/26/41/66 and n25.
5. The tuner state was established remotely through Wi-Fi so that the device is not moved for the entire series of single point SAR for the tuner states in each combination (band, mode, exposure conditions).

Antenna configuration	
Config*	Support transmit antenna and band
Config 0	ANT 0: GSM850, UMTS B5, CDMA BC0/BC10, LTE B5/B12/B13/B14/B17/B26/B71, NR n5/n12/n71 ANT 2: GSM1900, UMTS B2/B4, CDMA BC1, LTE B2/B4/B7/B25/B30/B66/B38/B41, NR n2/n25/n41/n66
Config 1	ANT 0: GSM1900, UMTS B2/B4, CDMA BC1, LTE B2/B4/B7/B25/B30/B66/B38/B41, NR n2/n25/n41/n66 ANT 1: GSM850, UMTS B5, CDMA BC0/BC10, LTE B5/B12/B13/B14/B17/B26/B71, NR n5/n12/n71

*Config 0 and 1 means output ports of power measurement for different antennas and bands.

**17.1 Supplemental Head SAR results**

RF exposure position						Average Value of Time Sweep (W/kg)												
Head (Ant0)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 5)	0	23	46	69	92	115	138	18	42	66	90	114
	GSM850	GPRS (4 Tx slots)	251	Left Cheek	0.245	0.267	0.07	0.174	0.177	0.18	0.213	0.201	0.122	0.001	0.001	0.001	0.001	0.001
	GSM1900	GPRS (4 Tx slots)	810	Left Cheek	0.147	0.189	0.149	0.149	0.073	0.016	0.111	0.149	0.13	0.025	0.158	0.139	0.082	0.082
	WCDMA II	RMC 12.2Kbps	9262	Left Cheek	0.254	0.277	0.018	0.151	0.065	0.056	0.104	0.189	0.027	0.056	0.256	0.275	0.265	0.123
	WCDMA IV	RMC 12.2Kbps	1513	Left Cheek	0.418	0.450	0.448	0.2	0.086	0.153	0.2	0.372	0.381	0.058	0.105	0.115	0.438	0.381
	WCDMA V	RMC 12.2Kbps	4132	Left Cheek	0.266	0.330	0.078	0.33	0.298	0.176	0.314	0.322	0.16	0.001	0.061	0.042	0.001	0.001
	CDMA BC0	1xRTT RC3 SO55	384	Left Cheek	0.288	0.286	0.055	0.055	0.141	0.217	0.16	0.094	0.246	0.027	0.274	0.255	0.074	0.284
	CDMA BC1	1xRTT RC3 SO55	25	Left Cheek	0.321	0.343	0.151	0.122	0.341	0.065	0.246	0.017	0.293	0.112	0.331	0.217	0.112	0.046
	CDMA BC10	1xRTT RC3 SO55	580	Left Cheek	0.271	0.297	0.076	0.038	0.238	0.085	0.181	0.276	0.19	0.219	0.057	0.124	0.219	0.152
	LTE Band 7	20M_QPSK_1_99	20850	Left Cheek	0.122	0.305	0.017	0.284	0.227	0.293	0.208	0.179	0.16	0.265	0.236	0.141	0.179	0.046
	LTE Band 12	10M_QPSK_1_49	23095	Left Cheek	0.256	0.278	0.089	0.218	0.226	0.136	0.225	0.229	0.118	0.001	0.056	0.001	0.001	0.001
	LTE Band 13	10M_QPSK_1_49	23230	Left Cheek	0.229	0.249	0.23	0.238	0.209	0.248	0.248	0.161	0.145	0.057	0.001	0.001	0.001	0.001
	LTE Band 14	10M_QPSK_1_0	23330	Left Cheek	0.243	0.263	0.24	0.109	0.225	0.272	0.261	0.001	0.173	0.064	0.001	0.001	0.001	0.001
	LTE Band 25	20M_QPSK_1_49	26140	Left Cheek	0.344	0.356	0.135	0.278	0.297	0.087	0.202	0.287	0.021	0.183	0.173	0.049	0.144	0.297
	LTE Band 26	15M_QPSK_1_0	26865	Left Cheek	0.254	0.276	0.334	0.311	0.288	0.308	0.33	0.001	0.217	0.087	0.049	0.001	0.001	0.05
	LTE Band 30	10M_QPSK_1_25	27710	Left Cheek	0.218	0.222	0.191	0.172	0.02	0.22	0.134	0.039	0.22	0.068	0.153	0.134	0.144	0.03
	LTE Band 41	20M_QPSK_1_49	39750	Left Cheek	0.111	0.121	0.119	0.109	0.071	0.052	0.109	0.005	0.109	0.119	0.033	0.119	0.119	0.005
	LTE Band 66	20M_QPSK_1_0	132572	Left Cheek	0.332	0.381	0.131	0.284	0.293	0.055	0.293	0.284	0.093	0.208	0.227	0.084	0.169	0.122

Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 64)	17	40	63	86	109	132	11	35	59	83	107	131
LTE Band 71	20M_QPSK_1_0	133322	Left Cheek	0.211	0.227	0.072	0.132	0.189	0.083	0.125	0.001	0.138	0.001	0.001	0.001	0.001	0.001
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 140)	18	41	64	87	110	133	12	36	60	84	108	132
FR1 n5	20M_BPSK_50_25	167300	Left Cheek	0.147	0.176	0.098	0.09	0.123	0.087	0.082	0.101	0.112	0.001	0.001	0.001	0.001	0.001
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 141)	19	42	65	88	111	134	13	37	61	85	109	133
FR1 n12	15M_BPSK_36_22	141500	Left Cheek	0.073	0.082	0.115	0.171	0.001	0.114	0.148	0.001	0.001	0.001	0.001	0.001	0.001	0.049
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 61)	20	43	66	89	112	135	14	38	62	86	110	134
FR1 n25	20M_BPSK_1_104	372000	Left Cheek	0.300	0.337	0.03	0.145	0.145	0.04	0.059	0.049	0.183	0.335	0.04	0.192	0.078	0.106
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 66)	21	44	67	90	113	136	15	39	63	87	111	135
FR1 n41	100M_BPSK_135_69	518598	Left Cheek	0.020	0.035	0.023	0.023	0.023	0.033	0.004	0.014	0.004	0.004	0.014	0.023	0.033	0.004
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 91)	22	45	68	91	114	137	16	40	64	88	112	136
FR1 n66	20M_BPSK_50_28	349000	Left Cheek	0.331	0.355	0.039	0.191	0.039	0.277	0.02	0.239	0.143	0.343	0.029	0.048	0.105	0.248
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 142)	23	46	69	92	115	138	17	41	65	89	113	137
FR1 n71	20M_BPSK_50_25	136100	Left Cheek	0.094	0.109	0.114	0.164	0.001	0.113	0.142	0.064	0.001	0.001	0.001	0.001	0.001	0.001

RF exposure position						Average Value of Time Sweep (W/kg)													
Head (Ant1)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 23)	0	12	24	3	15	27	6	18	30	9	21	4	8
	GSM850	GPRS (4 Tx slots)	251	Right Cheek	0.681	0.562	0.341	0.55	0.37	0.56	0.046	0.093	0.36	0.17	0.284	0.179	0.37	0.56	0.541
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 22)	1	13	25	4	16	28	7	19	31	10	22	8	
	WCDMA V	RMC 12.2Kbps	4132	Right Cheek	0.696	0.711	0.699	0.233	0.176	0.157	0.604	0.185	0.128	0.528	0.252	0.176	0.48	0.366	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 20)	2	14	26	5	17	29	8	20	32	11	23	4	
	CDMA BC0	1xRTT RC3 SO55	1013	Right Cheek	0.712	0.702	0.329	0.033	0.443	0.167	0.7	0.052	0.548	0.481	0.243	0.671	0.224	0.214	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 19)	3	15	27	6	18	30	9	21	0	12	24	5	
	CDMA BC10	1xRTT RC3 SO55	580	Right Cheek	0.732	0.701	0.529	0.052	0.624	0.186	0.243	0.49	0.338	0.119	0.633	0.529	0.633	0.252	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 15)	4	16	28	7	19	31	10	22	1	13	25	2	
	LTE Band 12	10M_QPSK_1_49	23095	Right Cheek	0.612	0.636	0.358	0.215	0.034	0.177	0.405	0.596	0.491	0.377	0.596	0.291	0.453	0.063	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 12)	5	17	29	8	20	32	11	23	2	14	26		
	LTE Band 13	10M_QPSK_1_49	23230	Right Cheek	0.539	0.577	0.546	0.08	0.204	0.299	0.404	0.137	0.165	0.537	0.137	0.394	0.28	0.375	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 2)	6	18	30	9	21	0	12	24	3	15	27	8	
	LTE Band 14	10M_QPSK_1_0	23330	Right Cheek	0.472	0.498	0.067	0.22	0.439	0.067	0.106	0.039	0.096	0.048	0.134	0.058	0.21	0.334	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 23)	7	19	31	10	22	1	13	25	4	16	28	8	
	LTE Band 26	15M_QPSK_1_0	26865	Right Cheek	0.605	0.615	0.423	0.28	0.099	0.308	0.146	0.308	0.08	0.108	0.318	0.251	0.184	0.251	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	8	20	32	11	23	2	14	26	5	17	29	1	
	LTE Band 71	20M_QPSK_1_0	133322	Right Cheek	0.339	0.350	0.234	0.081	0.186	0.11	0.177	0.119	0.234	0.272	0.224	0.186	0.215	0.272	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 23)	9	21	0	12	24	3	15	27	6	18	30	4	
	FR1 n5	20M_BPSK_1_1	167300	Right Cheek	0.593	0.621	0.609	0.143	0.238	0.4	0.581	0.381	0.543	0.476	0.229	0.2	0.324	0.324	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 1)	10	22	1	13	25	4	16	28	7	19	31	2	
	FR1 n12	15M_BPSK_1_1	141500	Right Cheek	0.406	0.398	0.386	0.263	0.082	0.12	0.377	0.234	0.291	0.358	0.082	0.129	0.12	0.063	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	11	23	2	14	26	5	17	29	8	20	32	1	
	FR1 n71	20M_BPSK_50_28	136100	Right Cheek	0.367	0.401	0.151	0.113	0.199	0.094	0.332	0.018	0.266	0.066	0.056	0.351	0.037	0.189	

RF exposure position						Average Value of Time Sweep (W/kg)												
Head (Ant 2)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	0	12	24	36	48	60	72	84	96	108	120	132
	GSM1900	GPRS (4 Tx slots)	661	Left Cheek	0.111	0.106	0.021	0.088	0.053	0.101	0.096	0.054	0.090	0.088	0.088	0.088	0.097	0.088
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 133)	1	13	25	37	49	61	73	85	97	109	121	133
	WCDMA II	RMC 12.2Kbps	9262	Left Cheek	0.250	0.260	0.069	0.235	0.185	0.246	0.243	0.245	0.256	0.242	0.251	0.248	0.238	0.251
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 120)	2	14	26	38	50	62	74	86	98	110	122	134
	WCDMA IV	RMC 12.2Kbps	1312	Left Cheek	0.240	0.179	0.054	0.170	0.093	0.026	0.155	0.093	0.146	0.041	0.150	0.030	0.147	0.034
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 133)	3	15	27	39	51	63	75	87	99	111	123	135
	CDMA BC1	1xRTT RC3 SO55	25	Left Cheek	0.218	0.231	0.124	0.229	0.029	0.172	0.115	0.2	0.219	0.124	0.21	0.067	0.134	0.124
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 16)	4	16	28	40	52	64	76	88	100	112	124	136
	LTE B7	20M_QPSK_1_99	20850	Right Cheek	0.413	0.326	0.145	0.326	0.178	0.146	0.09	0.162	0.149	0.201	0.099	0.208	0.067	0.059
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 43)	5	17	29	41	53	65	77	89	101	113	125	137
	LTE B25	20M_QPSK_1_99	26340	Right Cheek	0.271	0.200	0.177	0.001	0.161	0.163	0.163	0.166	0.157	0.122	0.187	0.166	0.177	0.117
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 39)	6	18	30	42	54	66	78	90	102	114	126	138
	LTE B30	10M_QPSK_1_0	27710	Right Cheek	0.177	0.190	0.116	0.18	0.155	0.132	0.087	0.152	0.116	0.148	0.075	0.059	0.055	0.055
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	7	19	31	43	55	67	79	91	103	115	127	139
	LTE B41	20M_QPSK_1_99	40185	Right Cheek	0.251	0.263	0.087	0.208	0.150	0.086	0.236	0.139	0.076	0.141	0.050	0.087	0.042	0.081
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 143)	8	20	32	44	56	68	80	92	104	116	128	140
	LTE B66	20M_QPSK_1_0	132322	Left Cheek	0.277	0.265	0.225	0.076	0.158	0.176	0.070	0.186	0.222	0.187	0.046	0.255	0.235	0.254
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	9	21	33	45	57	69	81	93	105	117	129	141
	FR1 n25	20M_BPSK_1_104	372000	Left Cheek	0.222	0.171	0.157	0.085	0.145	0.170	0.079	0.151	0.157	0.140	0.045	0.026	0.064	0.148
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 85)	10	22	34	46	58	70	82	94	106	118	130	142
	FR1 n41	100M_BPSK_1_137	518598	Right Cheek	0.098	0.065	0.030	0.064	0.058	0.029	0.064	0.052	0.023	0.048	0.044	0.046	0.036	0.027
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 120)	11	23	35	47	59	71	83	95	107	119	131	143
	FR1 n66	20M_BPSK_1_53	349000	Left Cheek	0.309	0.165	0.157	0.071	0.109	0.133	0.074	0.127	0.162	0.129	0.140	0.120	0.145	0.159

**17.2 Supplemental Body SAR results**

RF exposure position						Average Value of Time Sweep (W/kg)												
Body (Ant0)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 42)	0	23	46	69	92	115	138	18	42	66	90	114
	GSM850	GPRS (4 Tx slots)	189	Left Side	0.390	0.363	0.047	0.113	0.247	0.361	0.228	0.313	0.142	0.142	0.056	0.351	0.094	0.018
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 65)	1	24	47	70	93	116	139	19	43	67	91	115
	GSM1900	GPRS (4 Tx slots)	810	Back	0.385	0.364	0.094	0.19	0.056	0.285	0.094	0.361	0.256	0.294	0.266	0.247	0.142	0.037
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 54)	2	25	48	71	94	117	140	20	44	68	92	116
	WCDMA II	RMC 12.2Kbps	9538	Back	0.576	0.540	0.414	0.357	0.167	0.128	0.3	0.195	0.062	0.281	0.49	0.367	0.367	0.29
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 88)	3	26	49	72	95	118	141	21	45	69	93	117
	WCDMA IV	RMC 12.2Kbps	1513	Left Side	0.638	0.626	0.243	0.395	0.357	0.519	0.586	0.319	0.424	0.51	0.576	0.186	0.329	0.119
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 48)	4	27	50	73	96	119	142	22	46	70	94	118
	WCDMA V	RMC 12.2Kbps	4132	Left Side	0.349	0.321	0.186	0.138	0.09	0.252	0.186	0.129	0.29	0.243	0.176	0.071	0.224	0.319
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 5)	5	28	51	74	97	120	143	23	47	71	95	119
	CDMA BC0	RTAP 153.6Kbps	777	Left Side	0.358	0.370	0.178	0.054	0.273	0.339	0.263	0.273	0.035	0.063	0.216	0.273	0.025	0.13
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 54)	6	29	52	75	98	121	0	24	48	72	96	120
	CDMA BC1	RTAP 153.6Kbps	1175	Back	0.649	0.623	0.535	0.164	0.564	0.421	0.345	0.392	0.421	0.326	0.611	0.316	0.526	0.069
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 55)	7	30	53	76	99	122	1	25	49	73	97	121
	CDMA BC10	RTAP 153.6Kbps	580	Left Side	0.333	0.312	0.062	0.043	0.015	0.043	0.11	0.167	0.272	0.024	0.072	0.072	0.053	0.253
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 66)	8	31	54	77	100	123	2	26	50	74	98	122
	LTE Band 7	20M_QPSK_1_99	20850	Left Side	0.375	0.520	0.023	0.032	0.442	0.213	0.194	0.308	0.223	0.261	0.432	0.489	0.156	0.499
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 56)	9	32	55	78	101	124	3	27	51	75	99	123
	LTE Band 12	10M_QPSK_1_49	23095	Back	0.367	0.381	0.198	0.312	0.141	0.322	0.255	0.303	0.179	0.312	0.246	0.303	0.169	0.35
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	10	33	56	79	102	125	4	28	52	76	100	124
	LTE Band 13	10M_QPSK_1_49	23230	Back	0.291	0.307	0.153	0.019	0.095	0.257	0.048	0.105	0.086	0.153	0.134	0.048	0.267	0.105
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	11	34	57	80	103	126	5	29	53	77	101	125
	LTE Band 14	10M_QPSK_1_0	23330	Back	0.280	0.320	0.175	0.089	0.232	0.289	0.118	0.308	0.299	0.223	0.299	0.042	0.318	0.261
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 65)	12	35	58	81	104	127	6	30	54	78	102	126
	LTE Band 25	20M_QPSK_1_99	26340	Left Side	0.699	0.602	0.143	0.257	0.581	0.467	0.057	0.438	0.457	0.59	0.467	0.429	0.124	0.552
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 48)	13	36	59	82	105	128	7	31	55	79	103	127
	LTE Band 26	15M_QPSK_1_0	26865	Left Side	0.311	0.327	0.239	0.154	0.096	0.315	0.02	0.258	0.239	0.077	0.22	0.192	0.268	0.02
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 68)	14	37	60	83	106	129	8	32	56	80	104	128
	LTE Band 30	10M_QPSK_1_25	27710	Back	0.509	0.609	0.369	0.159	0.35	0.578	0.283	0.455	0.512	0.331	0.512	0.493	0.359	0.036
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 66)	15	38	61	84	107	130	9	33	57	81	105	129
	LTE Band 41	20M_QPSK_1_49	39750	Left Side	0.216	0.190	0.026	0.026	0.188	0.159	0.112	0.036	0.036	0.083	0.112	0.045	0.093	0.083
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 91)	16	39	62	85	108	131	10	34	58	82	106	130
	LTE Band 66	20M_QPSK_1_0	132572	Back	0.621	0.630	0.285	0.428	0.533	0.038	0.447	0.218	0.142	0.618	0.447	0.542	0.447	0.076

Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 48)	17	40	63	86	109	132	11	35	59	83	107	131
LTE Band 71	20M_QPSK_1_0	133322	Back	0.301	0.309	0.193	0.059	0.202	0.193	0.145	0.107	0.193	0.25	0.031	0.288	0.212	0.174
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 40)	18	41	64	87	110	133	12	36	60	84	108	132
FR1 n5	20M_BPSK_50_25	167300	Back	0.259	0.279	0.182	0.239	0.201	0.067	0.087	0.248	0.21	0.144	0.153	0.029	0.106	0.248
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 56)	19	42	65	88	111	134	13	37	61	85	109	133
FR1 n12	15M_BPSK_1_1	141500	Left Side	0.143	0.244	0.194	0.166	0.147	0.061	0.147	0.061	0.128	0.109	0.118	0.061	0.175	0.032
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 61)	20	43	66	89	112	135	14	38	62	86	110	134
FR1 n25	20M_BPSK_1_53	376500	Back	0.523	0.492	0.347	0.357	0.414	0.061	0.1	0.1	0.261	0.48	0.08	0.271	0.204	0.042
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 66)	21	44	67	90	113	136	15	39	63	87	111	135
FR1 n41	100M_BPSK_135_69	518598	Back	0.170	0.145	0.086	0.143	0.105	0.076	0.076	0.105	0.029	0.105	0.143	0.057	0.086	0.105
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 91)	22	45	68	91	114	137	16	40	64	88	112	136
FR1 n66	20M_BPSK_1_1	344000	Back	0.454	0.531	0.319	0.196	0.177	0.377	0.186	0.177	0.472	0.377	0.072	0.253	0.196	0.405
Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 42)	23	46	69	92	115	138	17	41	65	89	113	137
FR1 n71	20M_BPSK_50_25	136100	Left Side	0.196	0.313	0.111	0.282	0.159	0.14	0.063	0.178	0.168	0.254	0.082	0.159	0.054	0.14

RF exposure position						Average Value of Time Sweep (W/kg)													
Body (Ant1)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	0	12	24	3	15	27	6	18	30	9	21	4	8
	GSM850	GPRS (4 Tx slots)	189	Back	0.312	0.339	0.204	0.337	0.204	0.137	0.089	0.318	0.213	0.166	0.127	0.299	0.185	0.327	0.289
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 22)	1	13	25	4	16	28	7	19	31	10	22	8	
	WCDMA V	RMC 12.2Kbps	4132	Back	0.286	0.305	0.246	0.293	0.122	0.141	0.303	0.055	0.17	0.293	0.208	0.027	0.046	0.103	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 22)	2	14	26	5	17	29	8	20	32	11	23	4	
	CDMA BC0	RTAP 153.6Kbps	1013	Back	0.327	0.305	0.198	0.265	0.027	0.027	0.189	0.046	0.122	0.103	0.074	0.227	0.246	0.255	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 21)	3	15	27	6	18	30	9	21	0	12	24	5	
	CDMA BC10	RTAP 153.6Kbps	580	Back	0.330	0.303	0.046	0.208	0.036	0.16	0.246	0.198	0.255	0.198	0.227	0.036	0.198	0.284	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 5)	4	16	28	7	19	31	10	22	1	13	25	2	
	LTE Band 12	10M_QPSK_1_49	23095	Left Side	0.329	0.349	0.128	0.118	0.176	0.318	0.157	0.176	0.347	0.223	0.185	0.214	0.214	0.337	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 2)	5	17	29	8	20	32	11	23	2	14	26		
	LTE Band 13	10M_QPSK_1_49	23230	Back	0.235	0.241	0.077	0.172	0.096	0.096	0.153	0.182	0.22	0.058	0.02	0.01	0.239	0.229	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 17)	6	18	30	9	21	0	12	24	3	15	27	8	
	LTE Band 14	10M_QPSK_1_0	23330	Back	0.212	0.337	0.221	0.325	0.211	0.116	0.325	0.24	0.183	0.03	0.097	0.164	0.068	0.278	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 23)	7	19	31	10	22	1	13	25	4	16	28	4	
	LTE Band 26	15M_QPSK_1_0	26865	Back	0.271	0.280	0.23	0.107	0.04	0.249	0.145	0.078	0.259	0.059	0.097	0.011	0.145	0.135	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	8	20	32	11	23	2	14	26	5	17	29	1	
	LTE Band 71	20M_QPSK_1_0	133322	Left Side	0.233	0.256	0.187	0.244	0.206	0.254	0.092	0.178	0.14	0.102	0.13	0.14	0.197	0.025	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 23)	9	21	0	12	24	3	15	27	6	18	30	4	
	FR1 n5	20M_BPSK_50_25	167300	Back	0.253	0.265	0.034	0.196	0.063	0.12	0.177	0.253	0.111	0.063	0.082	0.215	0.196	0.168	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 1)	10	22	1	13	25	4	16	28	7	19	31	2	
	FR1 n12	15M_BPSK_36_0	141500	Left Side	0.187	0.208	0.054	0.13	0.016	0.101	0.101	0.082	0.025	0.149	0.139	0.016	0.035	0.063	
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	11	23	2	14	26	5	17	29	8	20	32	1	
	FR1 n71	20M_BPSK_50_28	136100	Left Side	0.170	0.191	0.056	0.056	0.094	0.113	0.141	0.075	0.189	0.103	0.17	0.065	0.179	0.075	



RF exposure position						Average Value of Time Sweep (W/kg)												
Body (Ant 2)	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	0	12	24	36	48	60	72	84	96	108	120	132
	GSM1900	GPRS (4 Tx slots)	661	Bottom Side	0.624	0.612	0.086	0.134	0.343	0.267	0.067	0.553	0.229	0.315	0.581	0.239	0.105	0.391
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 43)	1	13	25	37	49	61	73	85	97	109	121	133
	WCDMA II	RMC 12.2Kbps	9538	Back	0.776	0.756	0.274	0.592	0.53	0.122	0.67	0.545	0.673	0.081	0.66	0.127	0.481	0.625
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 120)	2	14	26	38	50	62	74	86	98	110	122	134
	WCDMA IV	RMC 12.2Kbps	1513	Back	0.586	0.569	0.224	0.566	0.373	0.127	0.55	0.363	0.52	0.142	0.533	0.095	0.5	0.108
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 0)	3	15	27	39	51	63	75	87	99	111	123	135
	CDMA BC1	RTAP 153.6Kbps	1175	Back	0.659	0.687	0.285	0.266	0.571	0.656	0.437	0.618	0.133	0.361	0.675	0.533	0.218	0.056
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 17)	4	16	28	40	52	64	76	88	100	112	124	136
	LTE B7	20M_QPSK_50_50	21350	Bottom Side	0.661	0.624	0.479	0.041	0.441	0.498	0.27	0.184	0.222	0.308	0.289	0.051	0.165	0.222
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 47)	5	17	29	41	53	65	77	89	101	113	125	137
	LTE B25	20M_QPSK_50_50	26590	Bottom Side	0.691	0.661	0.564	0.421	0.23	0.097	0.364	0.564	0.554	0.583	0.459	0.145	0.611	0.116
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 1)	6	18	30	42	54	66	78	90	102	114	126	138
	LTE B30	10M_QPSK_1_0	27710	Back	0.675	0.631	0.364	0.595	0.472	0.392	0.346	0.457	0.365	0.47	0.472	0.24	0.166	0.272
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 16)	7	19	31	43	55	67	79	91	103	115	127	139
	LTE B41	20M_QPSK_1_49	41055	Back	0.738	0.712	0.261	0.553	0.431	0.256	0.63	0.408	0.22	0.403	0.157	0.25	0.127	0.238
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 133)	8	20	32	44	56	68	80	92	104	116	128	140
	LTE B66	20M_QPSK_1_49	132572	Bottom Side	0.668	0.640	0.6	0.505	0.143	0.286	0.19	0.295	0.59	0.638	0.057	0.067	0.048	0.638
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 44)	9	21	33	45	57	69	81	93	105	117	129	141
	FR1 n25	20M_BPSK_50_56	376500	Bottom Side	0.672	0.650	0.515	0.286	0.153	0.086	0.105	0.124	0.553	0.534	0.077	0.277	0.477	0.505
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 139)	10	22	34	46	58	70	82	94	106	118	130	142
	FR1 n41	100M_QPSK_1_137	518598	Back	0.270	0.269	0.09	0.166	0.145	0.093	0.183	0.142	0.075	0.129	0.125	0.134	0.105	0.083
	Band	Mode	Channel	Test Position	Measured 1g SAR (W/kg)	Auto-Tune (State 143)	11	23	35	47	59	71	83	95	107	119	131	143
	FR1 n66	20M_QPSK_1_1	344000	Back	0.678	0.616	0.605	0.3	0.446	0.451	0.315	0.515	0.58	0.527	0.567	0.49	0.58	0.616

Test Engineer : Eason Wang, Kells Chen, Willy Yu, Jordar Jhuang, Shane Song, Jeff Tsao, Charles Shen, Ray Sun, Tommy Chen, Ginger Chiang, White Huang, Jerry Hsu and Murphy Lee

18. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

19. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.