



Nemko Test Report: 2014 258169 FCC PT90rev2

Applicant: E.F. Johnson
1440 Corporate Drive
Irving, TX 75038

**Equipment Under Test:
(E.U.T.)** 242-5770

In Accordance With: **CFR 47 Part 90, Subpart I and
Industry Canada RSS-119, Issue 11**
Private Land Mobile Transmitters

FCC Identifier: ATH2425770

IC Identifier: 933B-2425770

Tested By: Nemko USA Inc.
2210 Faraday Ave.
Suite 150
Carlsbad, CA 92008

TESTED BY: 
David Light, Wireless Engineer

DATE: 08 Sept. 2014
Date

APPROVED BY: 
Bruce Ketterling, EMC Manager

DATE: 08 Sept 2014
Date

Number of Pages: 27

Table of Contents

Section 1. Summary of Test Results	3
Section 2. General Equipment Specification	5
Section 3. Spurious Emissions at Antenna Terminals	6
Section 4. Adjacent Channel Power	22
ANNEX A - TEST METHODOLOGIES.....	24
ANNEX B - TEST DIAGRAMS	26

EQUIPMENT: 242-5770PROJECT NO.: 2014 258169 FCC PT90rev2**Section 1. Summary of Test Results**

Manufacturer: E.F. Johnson

Model No.: 242-5770

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with CFR Part 90, Subpart I and Industry Canada RSS-119, Issue 11. EIA/TIA 603 and ANSI C63.4:2003 were used as a test method for these measurements.



New Submission



Production Unit



Class II Permissive Change



Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP Lab Code

200116-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Nemko USA, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety, for use by the company's employees only.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

*EQUIPMENT: 242-5770*PROJECT NO.: 2014 258169 FCC PT90rev2

Summary of Test Data

NAME OF TEST	PARA. NO.	RESULT
RF Power Output	90.205 / 5.4.5	NT
Audio Frequency Response	TIA EIA-6.3.2.6	NT
Audio Low Pass Filter Response	TIA EIA-6.3.2.6	NT
Modulation Limiting	TIA EIA-6.3.2.6	NT
Spurious Emissions at Antenna Terminals	90.210 / 5.8.9.2	Complies
Field Strength of Spurious Emissions	90.210 / 5.8.9.2	NT
Frequency Stability	90.213 / 5.3	NT
Transient Frequency Behavior	90.214 / 5.9	NT
Adjacent Channel Power	90.543 / 5.8.9.1	Complies
Receiver Spurious Emissions	RSS-Gen 6.1	NT

Footnotes:

- 1) Transient Frequency Behavior is not required for this band.
- 2) Class II permissive change. Adding emission designator 8K10F7E. The only test needed were spurious emissions at antenna and adjacent channel power.

Revisions:

- Rev1) Added data for adjacent channel power in upper 700 MHz band. (Page 22)
Added data for additional masks. (Pages 16-20)
- Rev2) Remeasured and updated data pages 12 and 15.
Removed duplicate data page 16.
Provided emission mask H for data page 18.
Provided emission mask D for data page 20.
Listed ACP test frequencies page 23.

Section 2. General Equipment Specification

Supply Voltage Input:	7.5 Vdc				
Frequency Range:	763 – 775 MHz 793 – 805 MHz 806 – 824 MHz 851 – 869 MHz				
Emission Designator:	8K10F7E				
Output Impedance:	50 Ohms				
RF Power Output (rated):	<table><tr><td><u>3.0</u></td><td>W (763 – 806 MHz)</td></tr><tr><td><u>3.5</u></td><td>W (806 – 869 MHz)</td></tr></table>	<u>3.0</u>	W (763 – 806 MHz)	<u>3.5</u>	W (806 – 869 MHz)
<u>3.0</u>	W (763 – 806 MHz)				
<u>3.5</u>	W (806 – 869 MHz)				
Operator Selection of Operating Frequency:	Pre-programmed channel selection				
Power Output Adjustment Capability:	None				

System Description

3.5 Watt 700/800 MHz Land Mobile Radio transceiver

EQUIPMENT: 242-5770PROJECT NO.: 2014 258169 FCC PT90rev2**Section 3. Spurious Emissions at Antenna Terminals**

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 07 May 2014

Test Results: Complies.**Test Data:** See attached plot(s).**Equipment Used:**

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
1036	Spectrum Analyzer	Rohde & Schwartz	FSEK30	830844/006	15-Jul-2013	15-Jul-2015


Measurement Uncertainty: +/- 1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

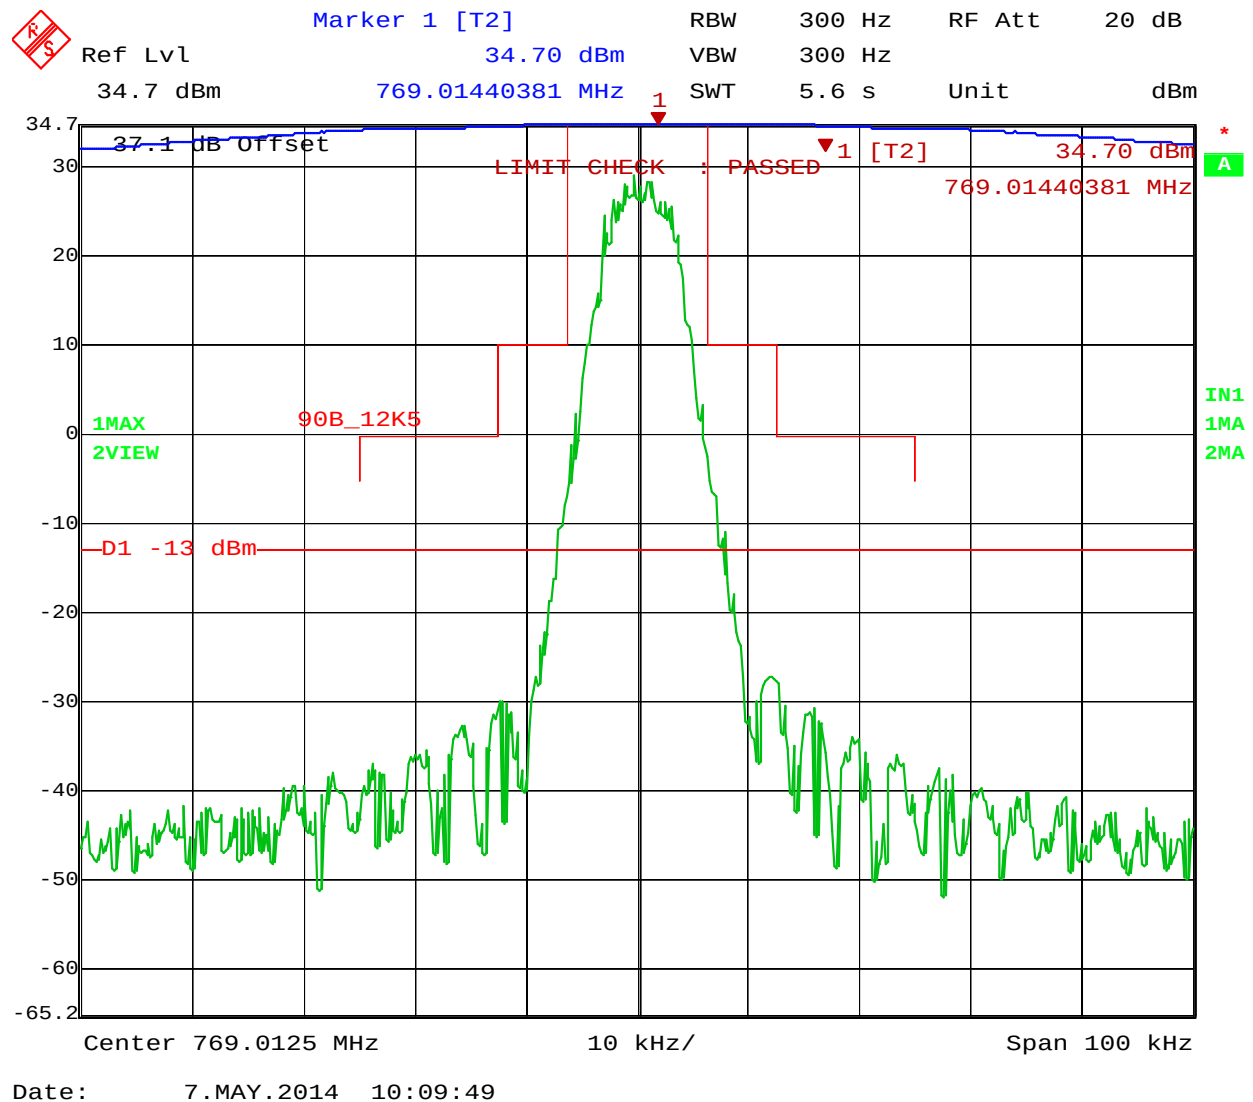


EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

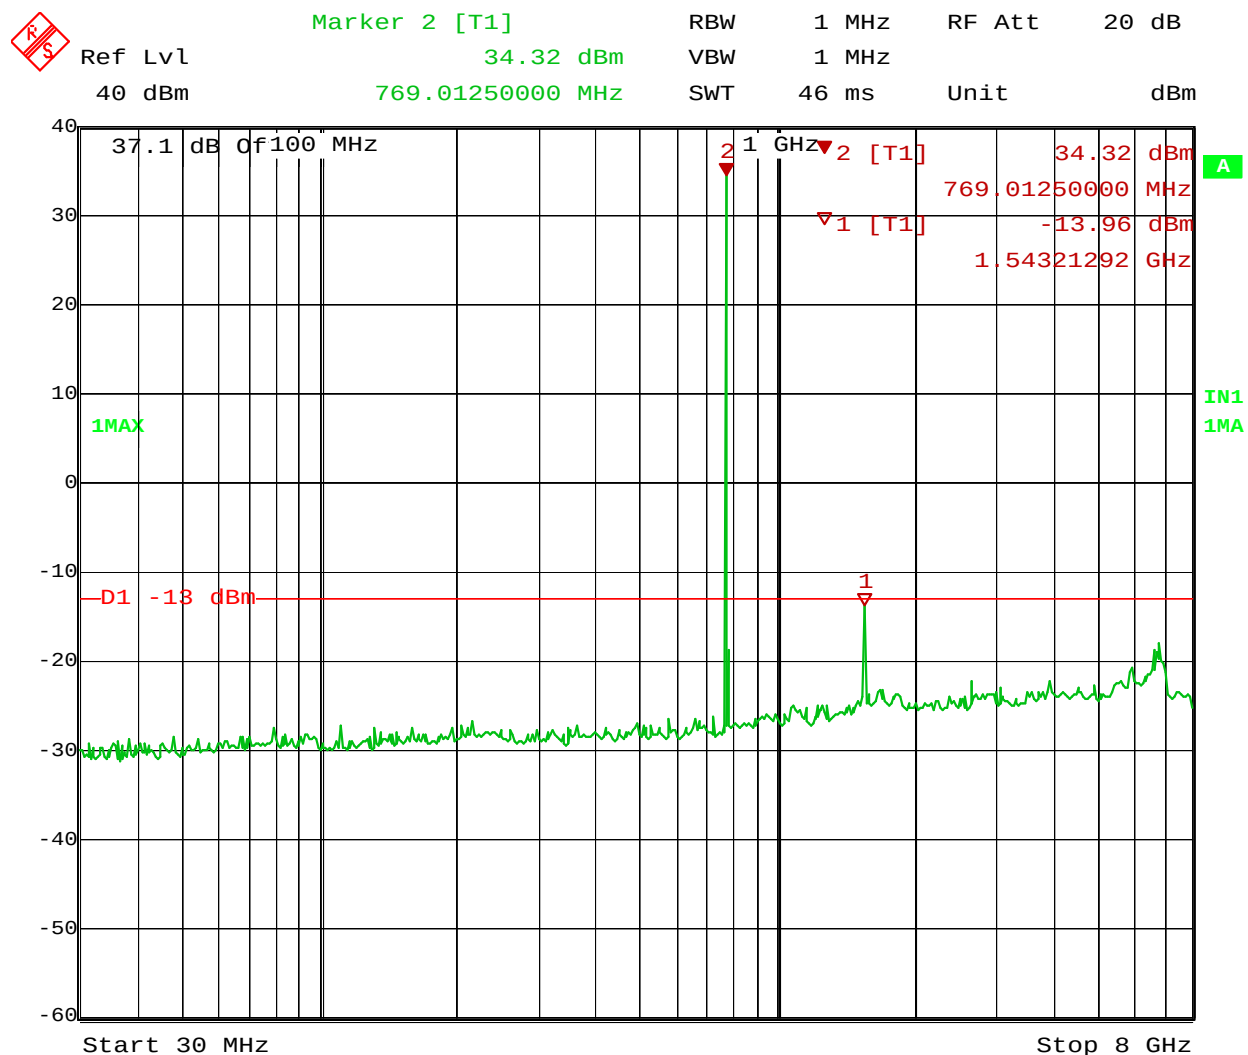


Date: 7.MAY.2014 10:06:00

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

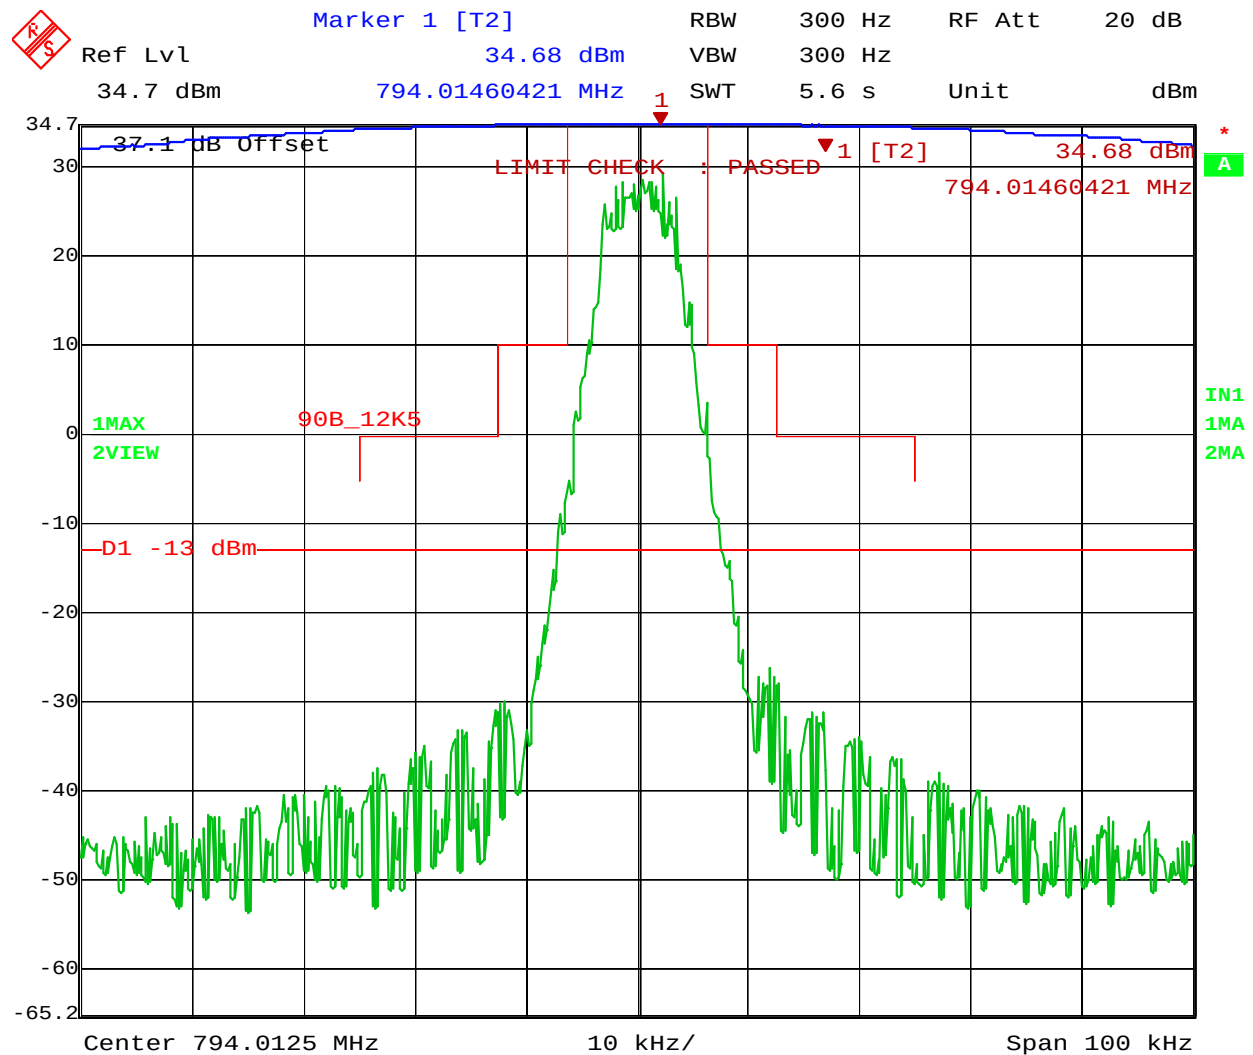


Date: 7.MAY.2014 10:14:28

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

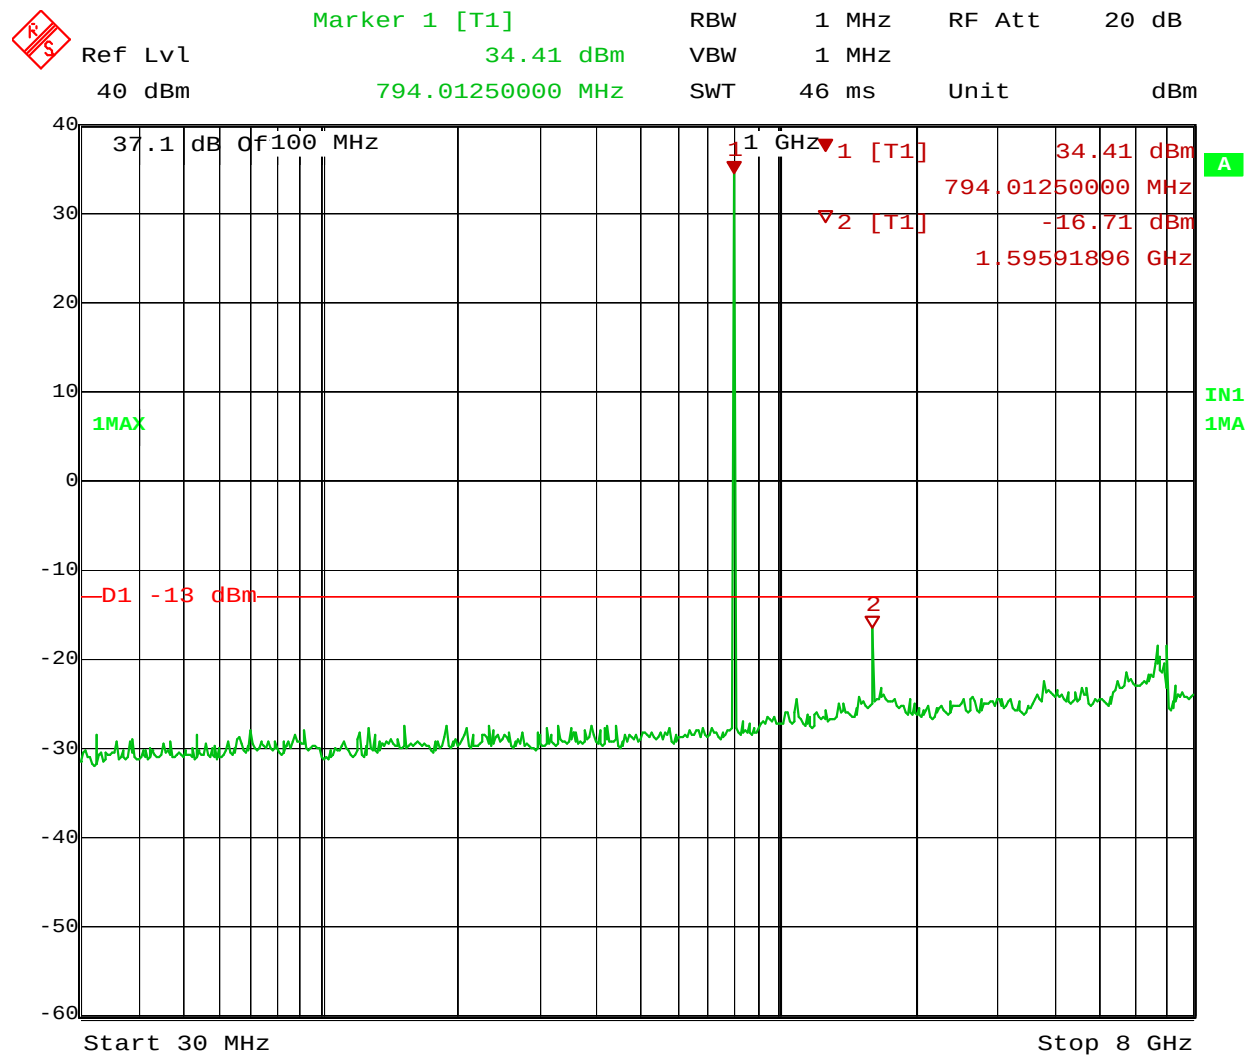

Date: 7.MAY.2014 10:19:37

1031 0 S




EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

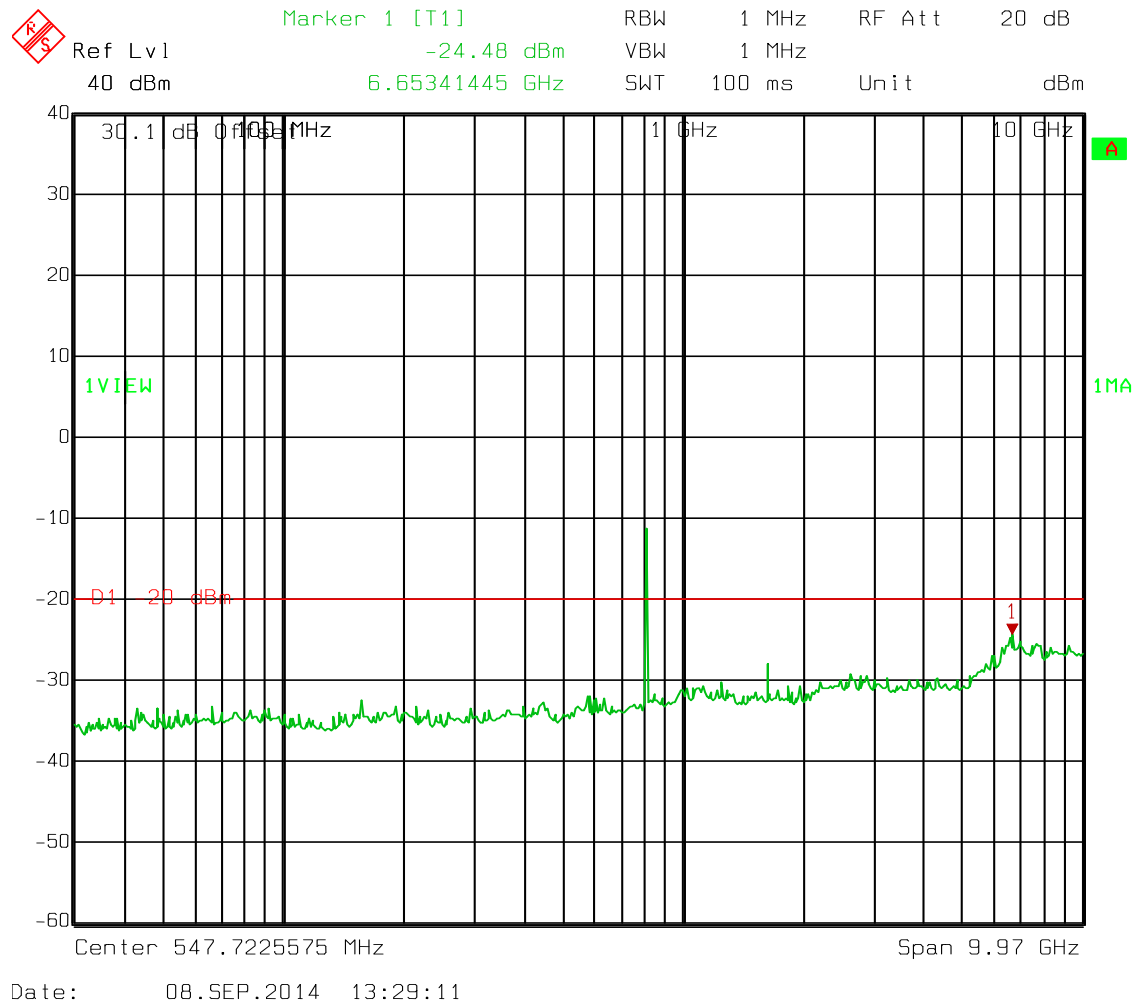


EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

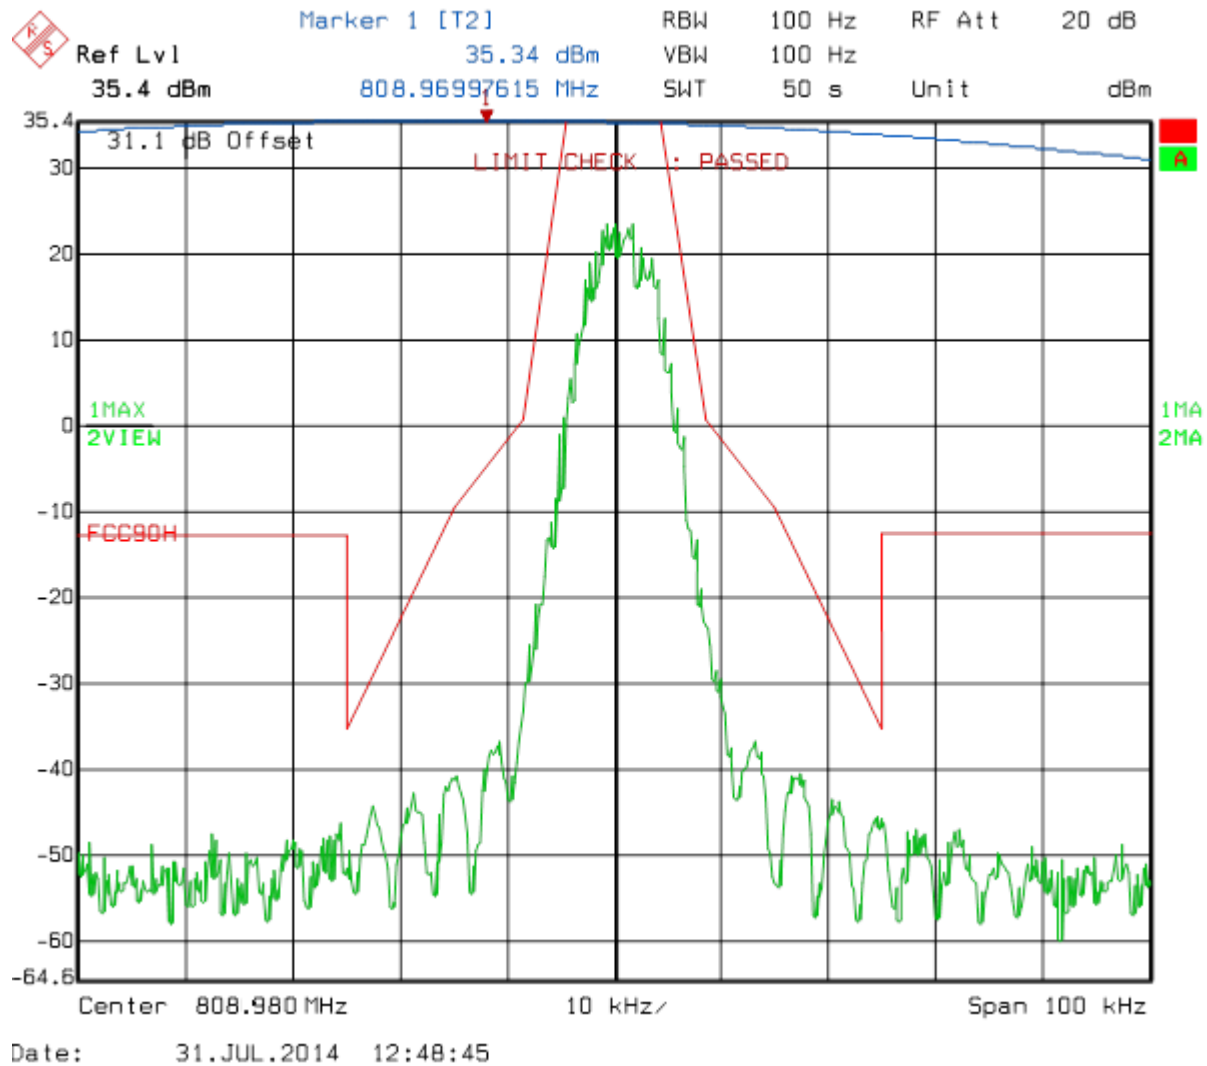


EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

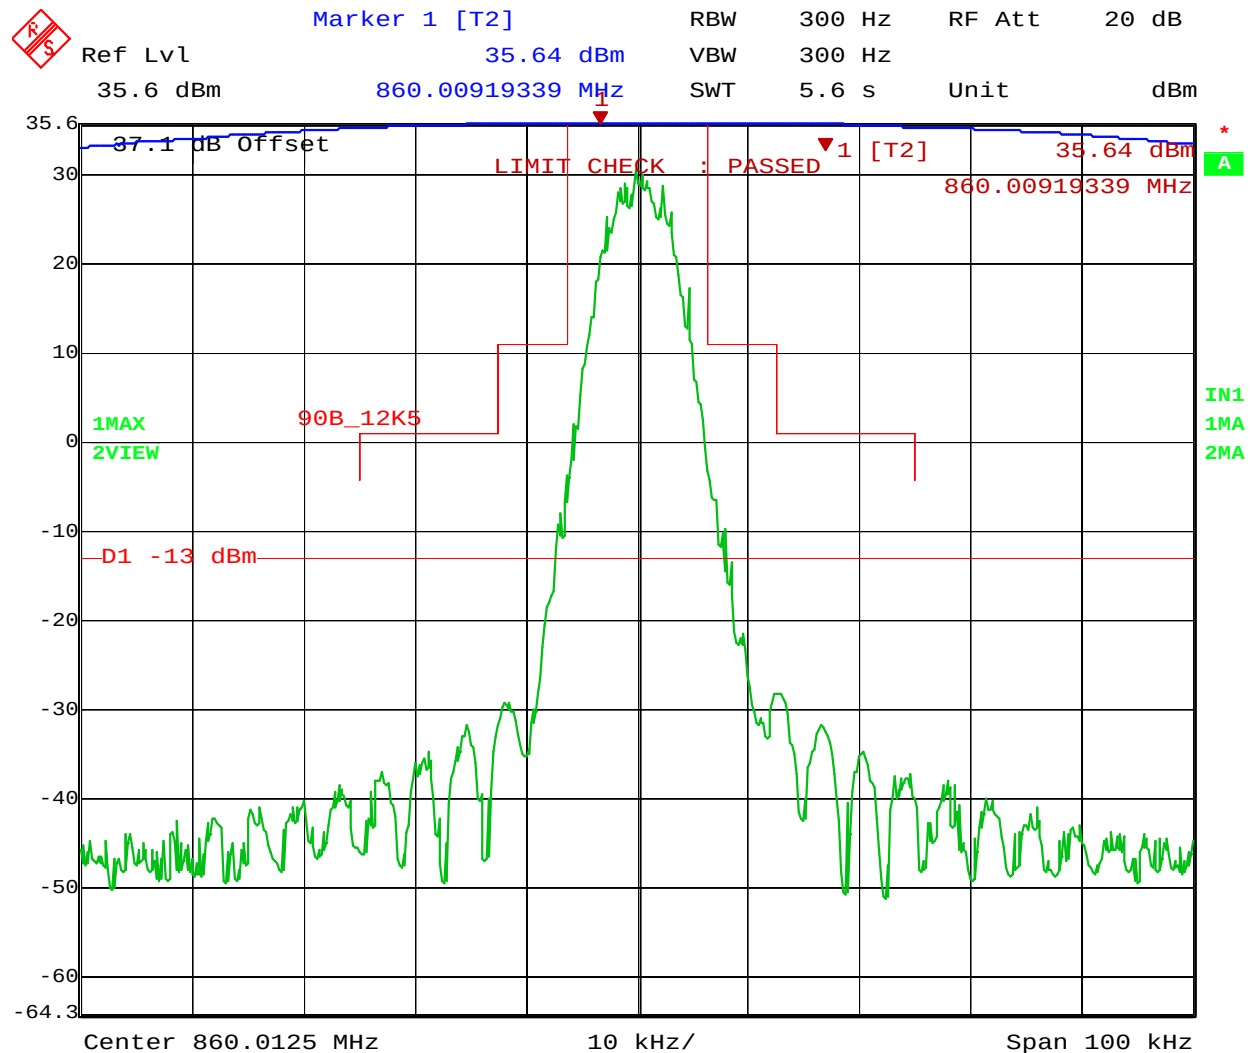


Date: 7.MAY.2014 10:31:45

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

1031 0 S

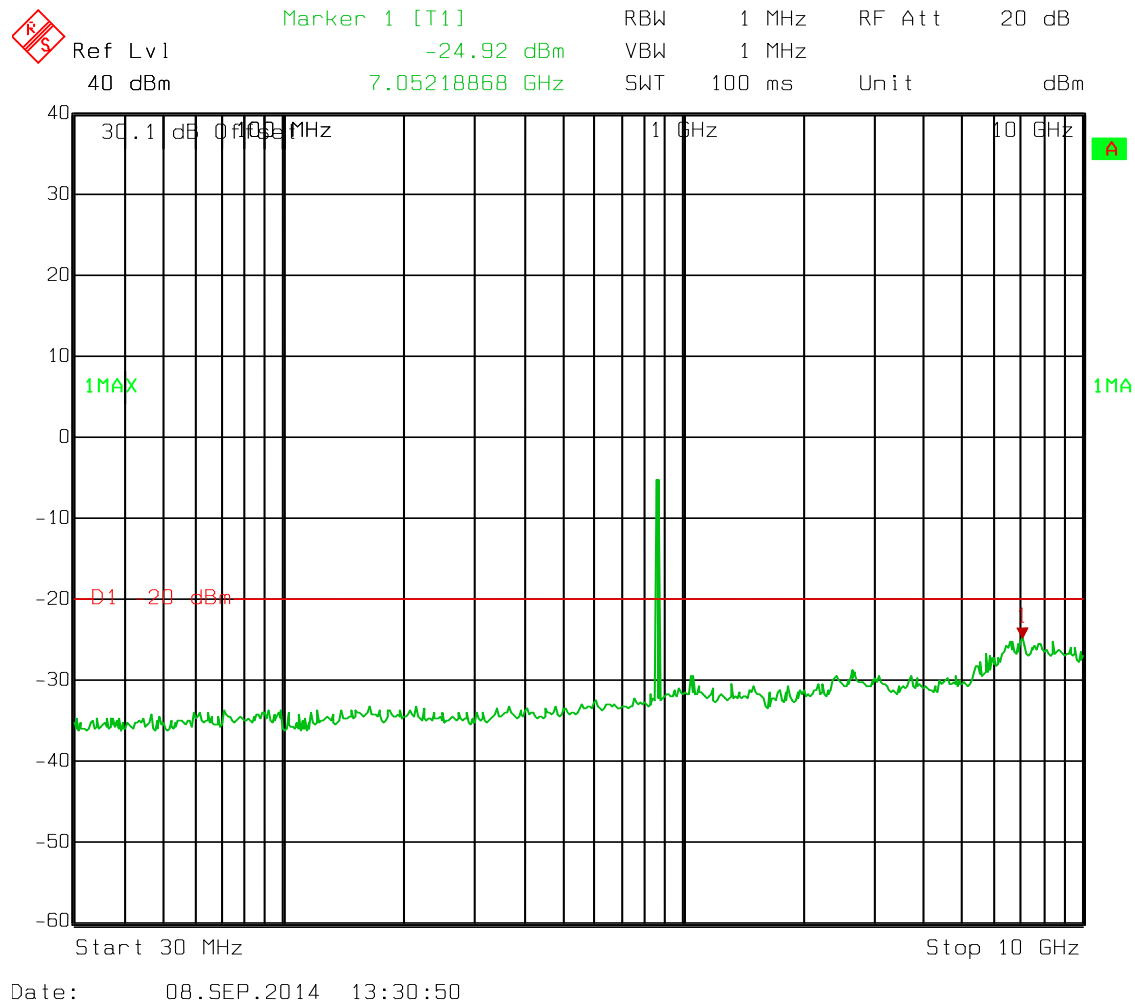


EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port


90.210(d)

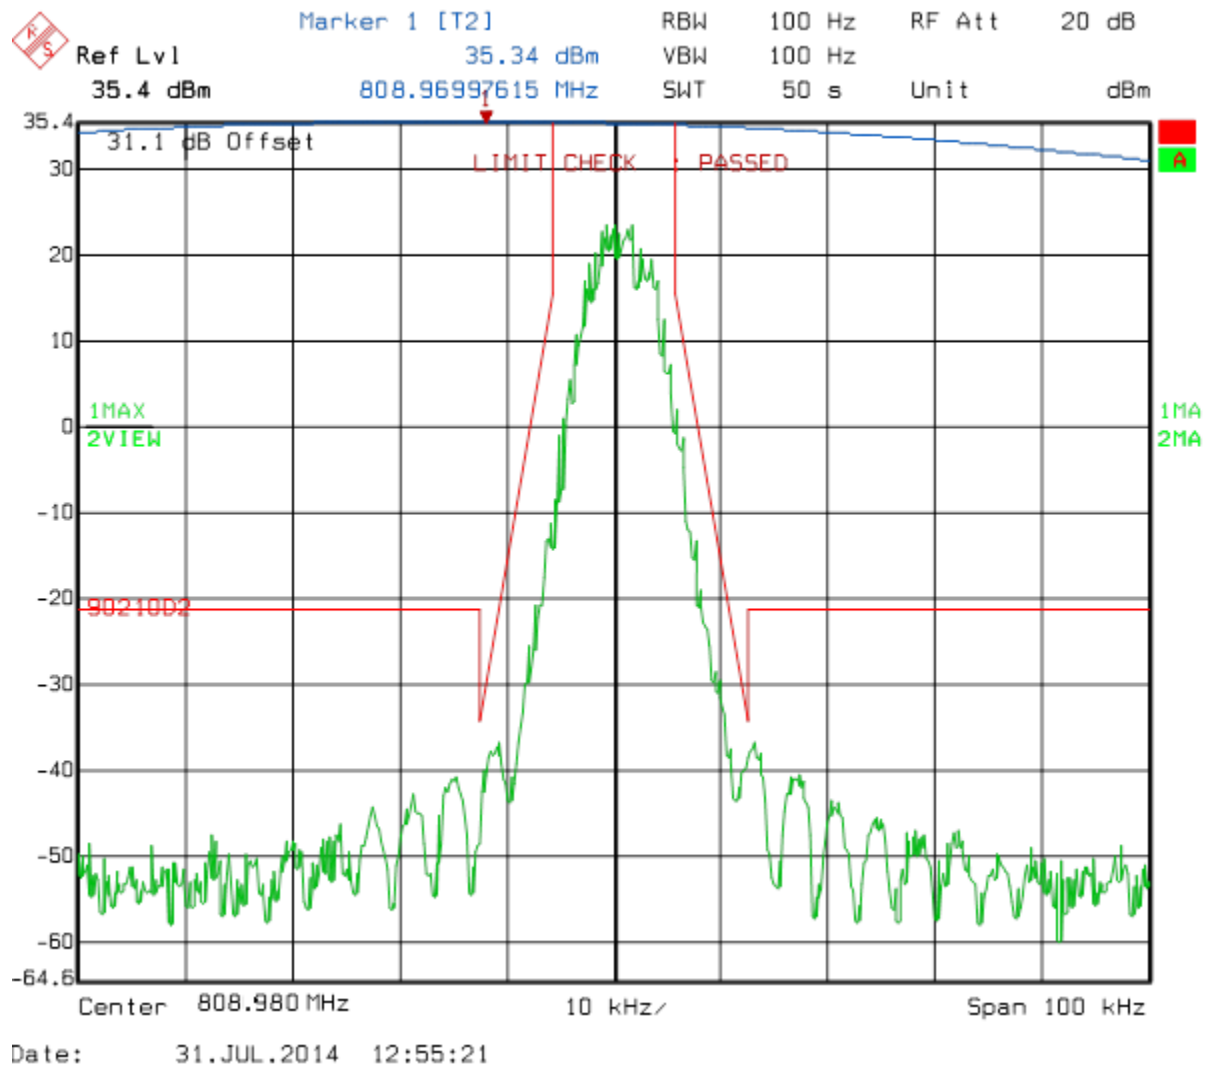

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

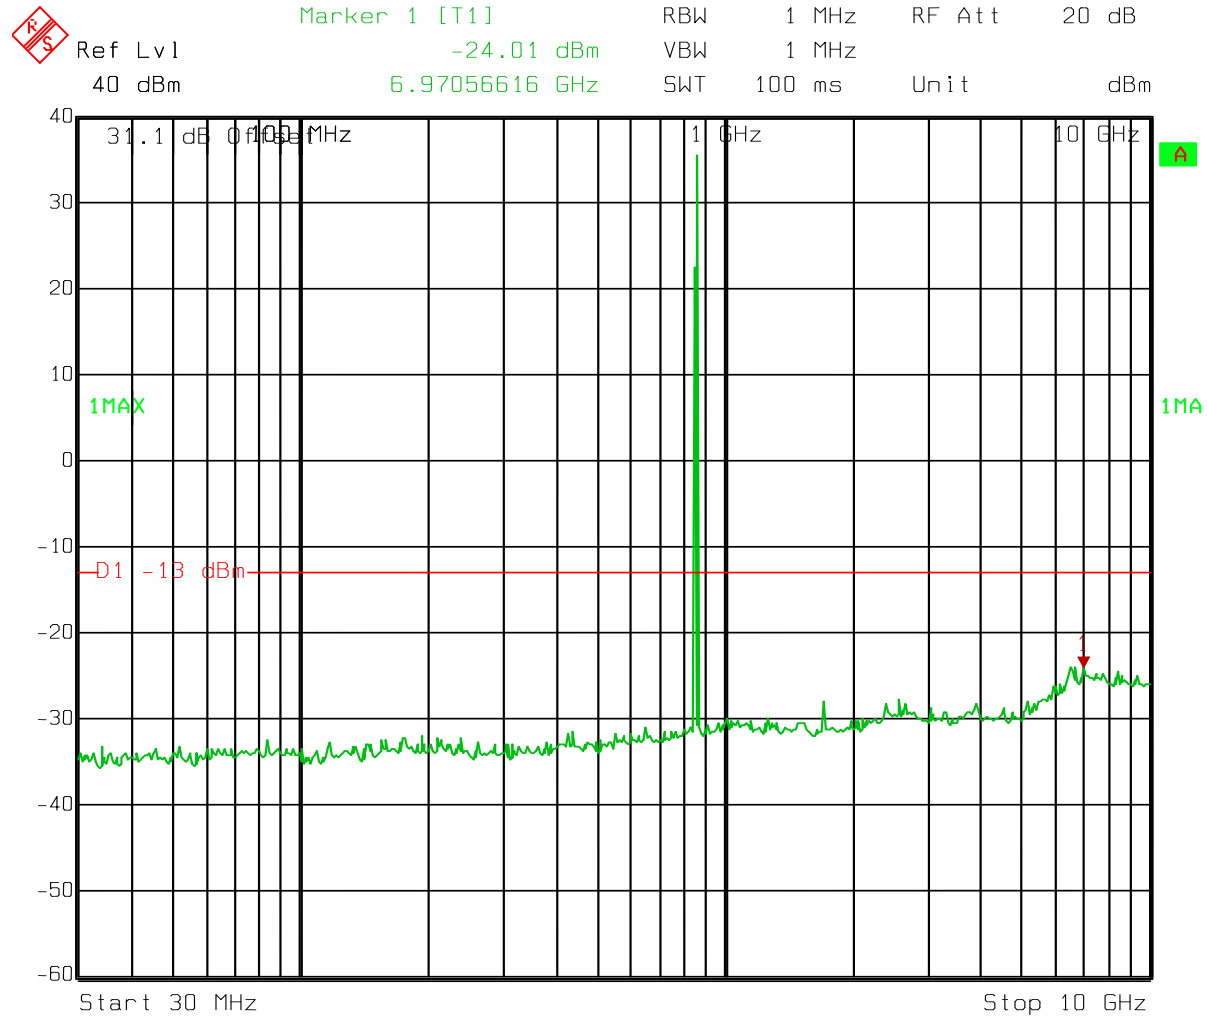


Date: 31.JUL.2014 12:58:21

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

Mask H

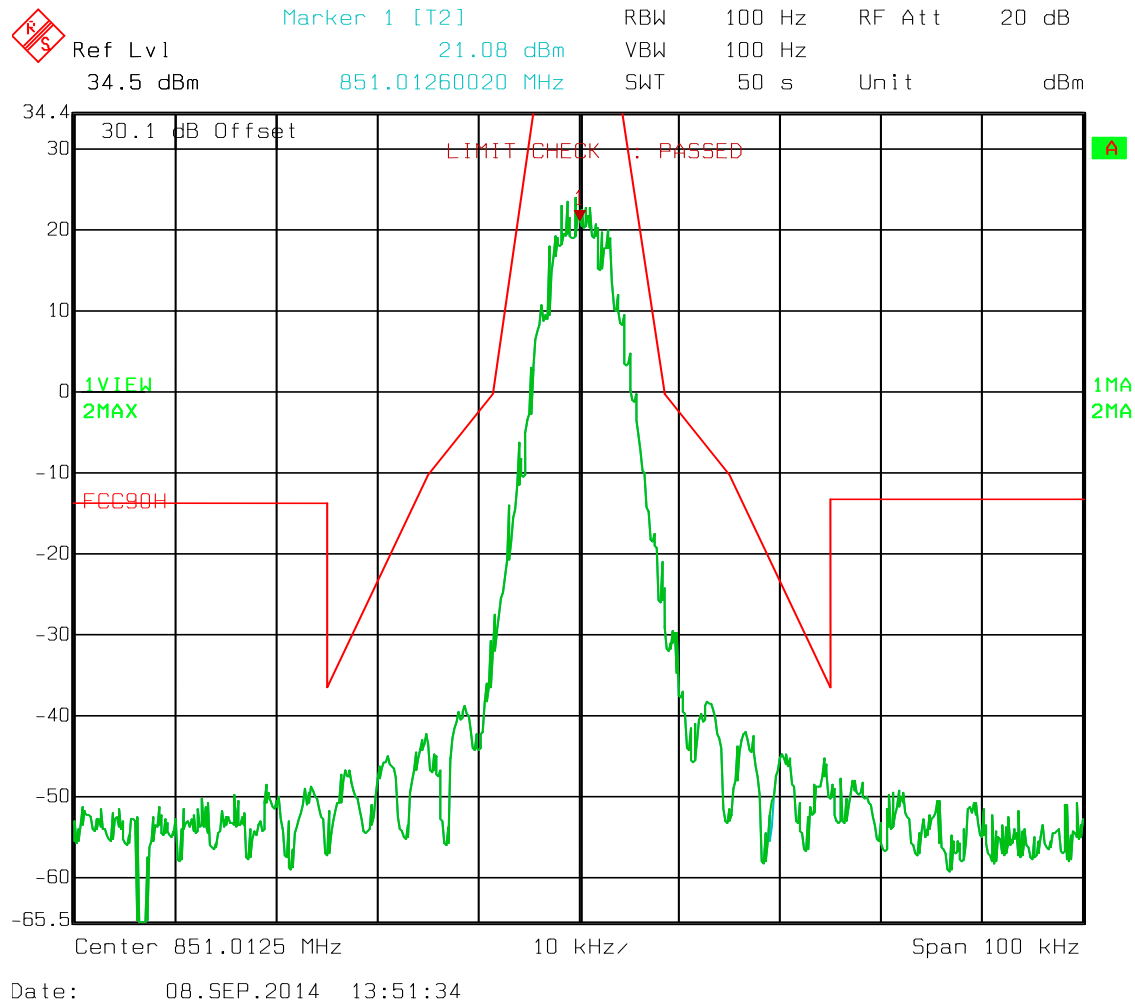


EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

Mask H

851-864 MHz

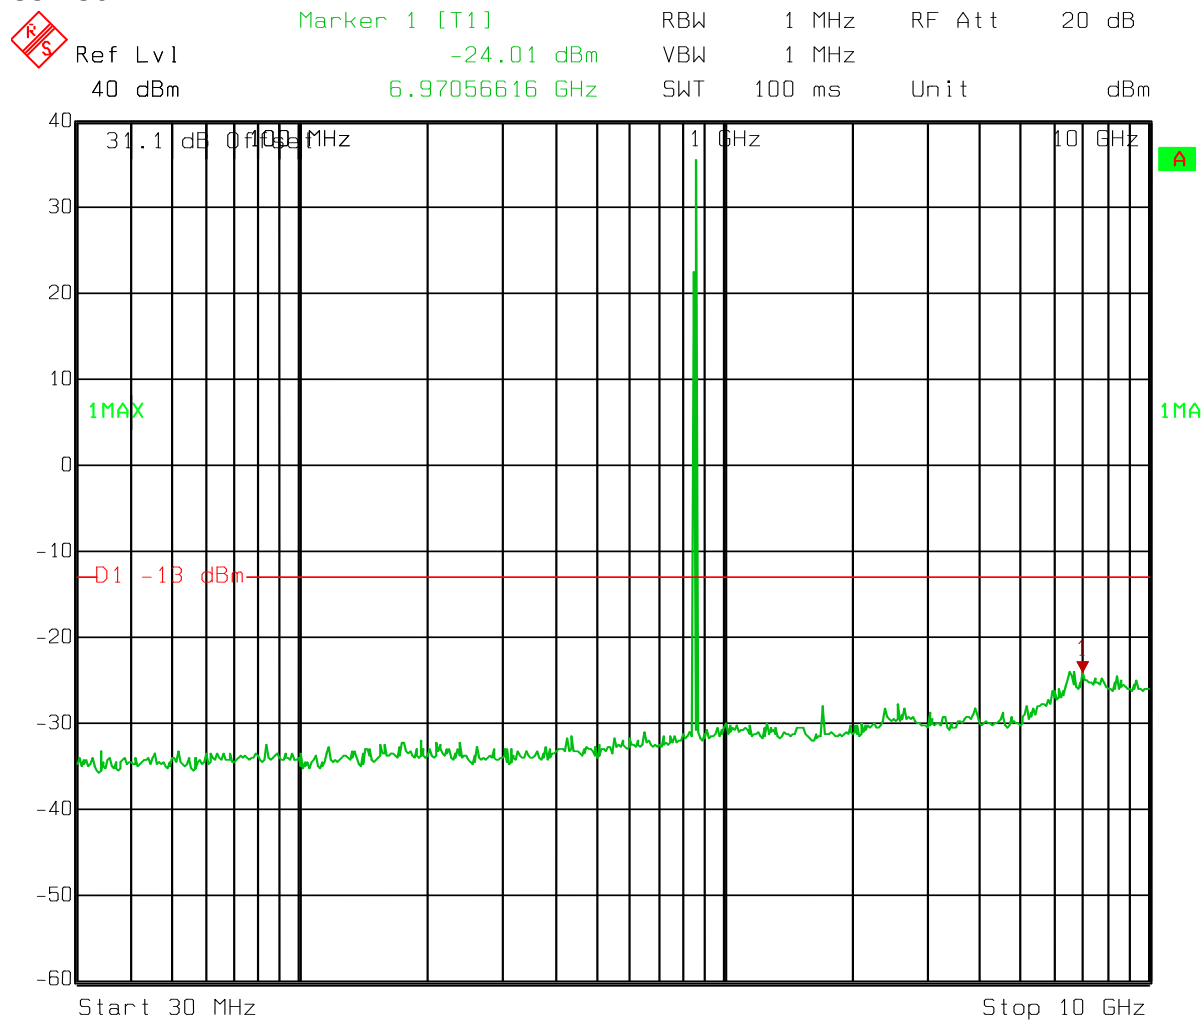


Date: 31.JUL.2014 12:58:21

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2


Test Data Spurious Emissions at Antenna Port

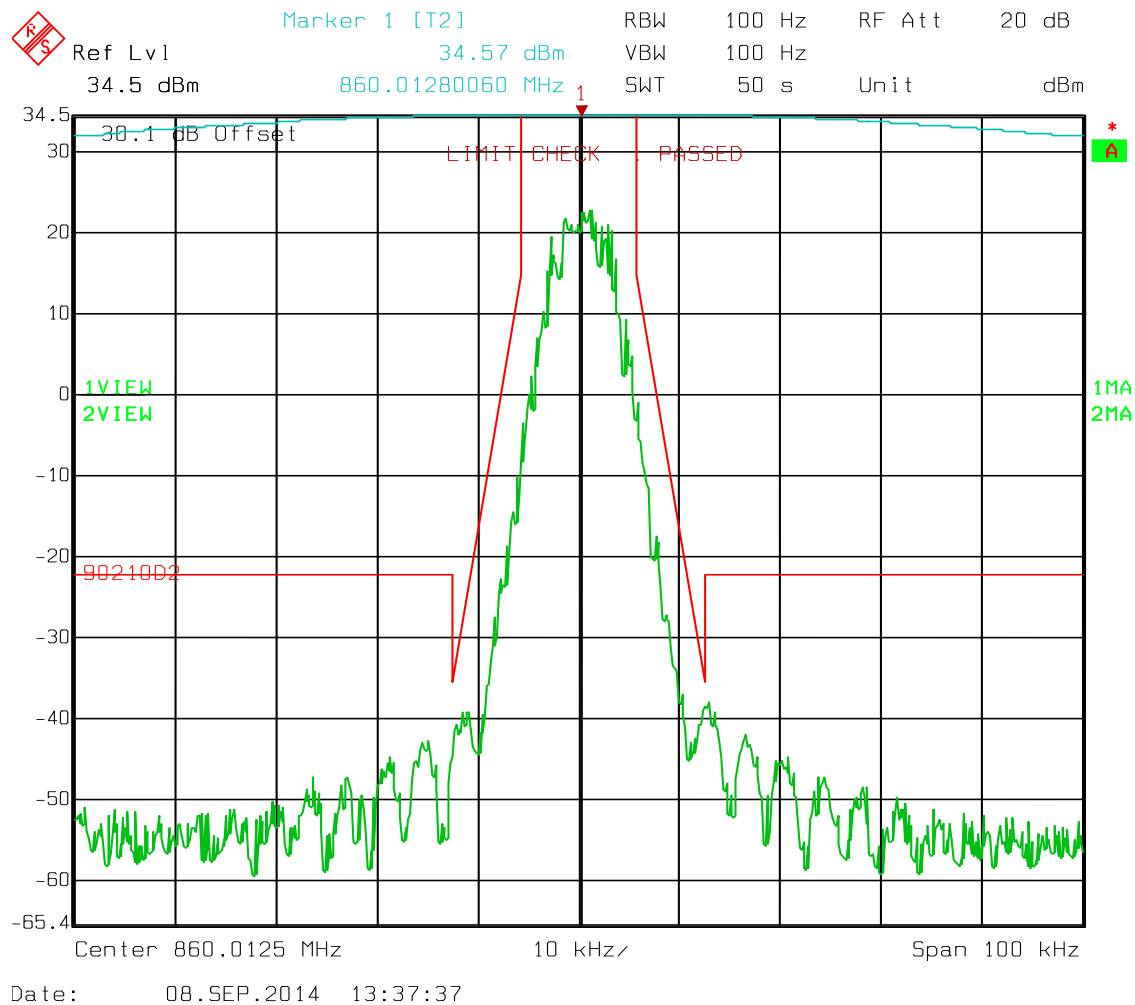Mask D
Canada 851-864

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Test Data Spurious Emissions at Antenna Port

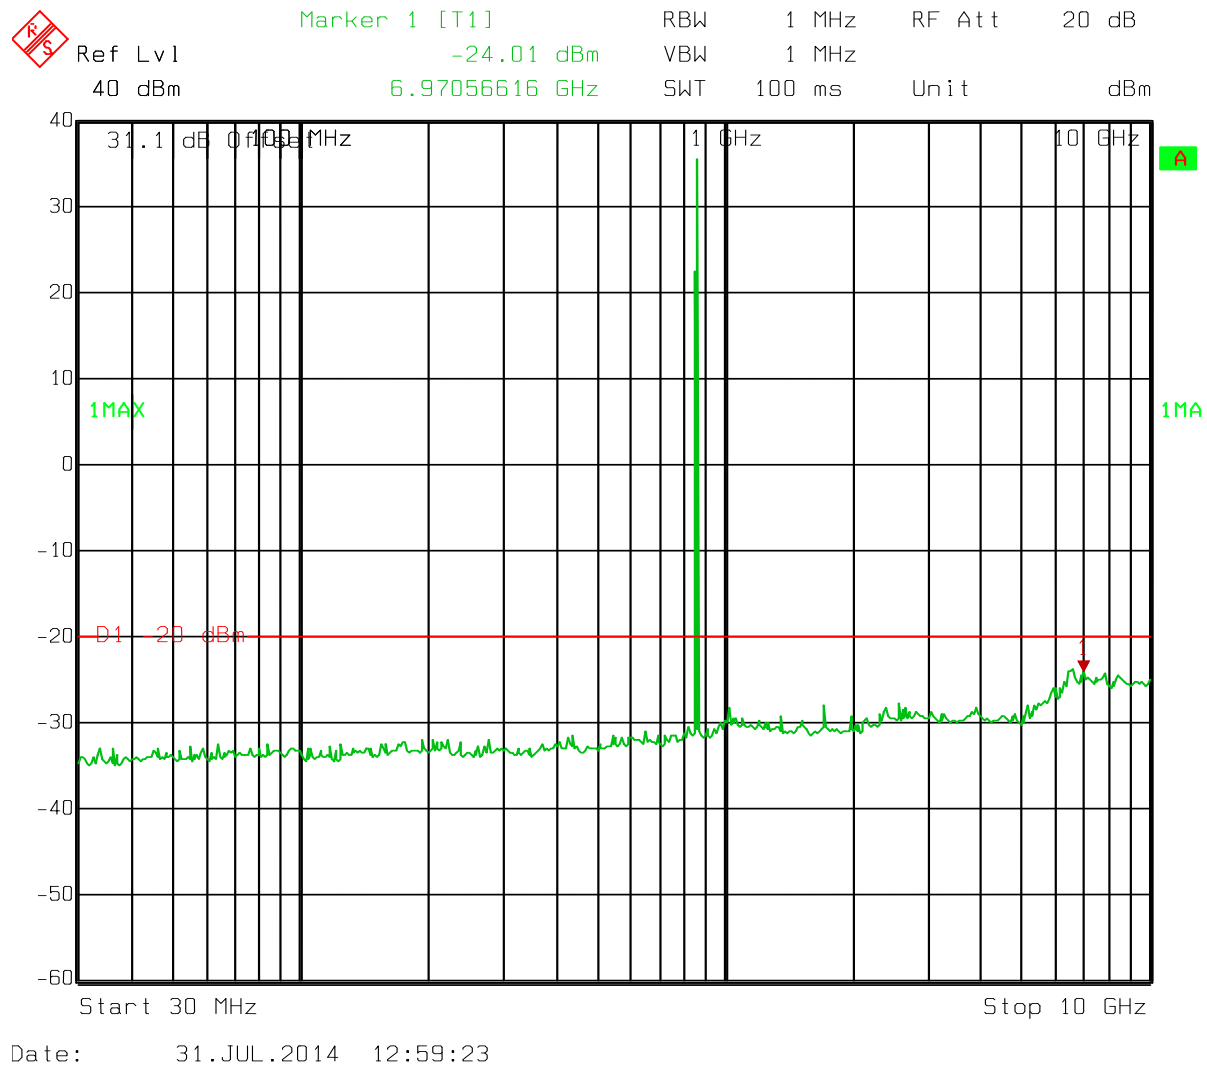Mask D
Canada 851-864

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

Section 4. Adjacent Channel Power

NAME OF TEST: Adjacent Channel Power	PARA. NO.: 90.543/5.8.9.1
TESTED BY: David Light	DATE: 07 May 2014

Test Results: Complies.**Test Data:** See attached table.**Equipment Used:**

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
1036	Spectrum Analyzer	Rohde & Schwartz	FSEK30	830844/006	15-Jul-2013	15-Jul-2015

Measurement Uncertainty: +/-1.7 dB**Temperature:** 22 °C**Relative Humidity:** 35 %**Limits**

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

EQUIPMENT: 242-5770PROJECT NO.: 2014 258169 FCC PT90rev2**Test Data – Adjacent Channel Power**

1031 0 S

Lower Band TX 764.0125 MHz

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)	Measured ACP Upper (dBc)	Measured ACP Lower (dBc)
9.375	6.25	-40	-40.5	-41.9
15.625	6.25	-60	-66.5	-73.0
21.875	6.25	-60	-79.7	-73.4
37.5	25	-60	-67.7	-67.0
62.5	25	-65	-68.3	-70.0
87.5	25	-65	-76.1	76.1
150	100	-65	-69.7	-69.3
250	100	-65	-74.9	-75.7
350	100	-65	-74.5	-74.5
>400 to 12 MHz	30 (s)	-75	-76.2	-75.9
12 MHz to paired receive band	30 (s)	-75	-77.1	-76.8
In the paired receive band	30 (s)	-100	-102.1	-103.0

Upper Band TX 794.0124 MHz

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)	Measured ACP Upper (dBc)	Measured ACP Lower (dBc)
9.375	6.25	-40	-43.4	-41.2
15.625	6.25	-60	-66.0	-66.9
21.875	6.25	-60	-67.2	-66.6
37.5	25	-60	-67.0	-67.3
62.5	25	-65	-67.0	-67.3
87.5	25	-65	-70.2	-70.9
150	100	-65	-66.1	-67.4
250	100	-65	-76.5	-75.9
350	100	-65	-77.8	-77.0
>400 to 12 MHz	30 (s)	-75	-76.1	-76.0
12 MHz to paired receive band	30 (s)	-75	-77.0	-76.5
In the paired receive band	30 (s)	-100	-103.0	-103.0

ANNEX A - TEST METHODOLOGIES

EQUIPMENT: 242-5770

PROJECT NO.: 2014 258169 FCC PT90rev2

**NAME OF TEST: Spurious Emissions at Antenna
Terminals****PARA. NO.: 2.991****Minimum Standard:**

90.210, Table 1

Table 1

Frequency Band (MHz)	Mask for equipment with Low Pass Filter	Mask for equipment without Low Pass Filter
Below 25	A or B	A or C
25 - 50	B	C
72 - 76	B	C
150 - 174	B, D or E	C, D or E
150 Paging only	B	C
220 - 222	F	F
421 - 512	B, D or E	C, D or E
450 paging only	B	H
806 - 821/ 851 - 866	B	G
821 - 824/ 866 - 869	B	H
896 - 901/ 935 - 940	I	J
902 - 928	K	K
929 - 930	B	G
Above 940	B	C
All other bands	B	C

MASK	Spurious Limit	FS Limit Below 1 GHz	FS Limit Above 1 GHz
A,B,C,G,H,I	-13dBm	84.4 dB μ V/m@3m	82.2 dB μ V/m@3m
D,J	-20dBm	77.4 dB μ V/m@3m	75.2 dB μ V/m@3m
E,F,K	-25dBm	72.4 dB μ V/m@3m	70.2 dB μ V/m@3m

Test Method:

RBW: 1% of emission bandwidth in the 0 - 1 GHz range.
1 MHz at frequencies above 1 GHz.
VBW: $\Rightarrow$ RBW

The spectrum is searched up to 10 times the fundamental frequency.

ANNEX B - TEST DIAGRAMS

Para. No. 2.991 - Spurious Emissions at Antenna Terminals

