

Appendix A

Spurious Emission (30M-1G)

Note: All test modes have been arranged testing separately, and the worst test mode were record in the Appendix A.

Shenzhen EMTEK Co., Ltd
Bldg. 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #9

Date: 2015/05/29

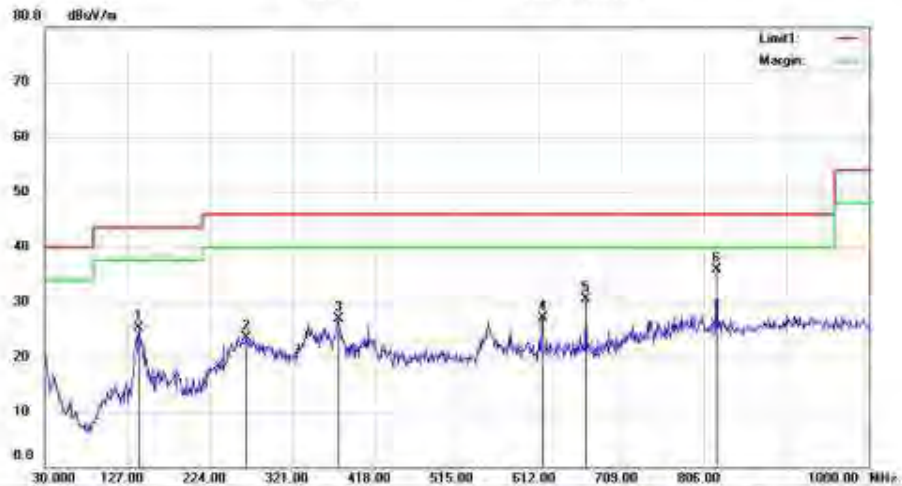

Site: site #1

Polarization: Horizontal

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH157 5785

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		140.5800	43.15	-17.80	25.35	43.50	-18.15	QP		
2		266.6800	36.16	-12.72	23.44	46.00	-22.56	QP		
3		375.3200	37.13	-10.17	26.96	46.00	-19.04	QP		
4		615.8800	34.03	-6.83	27.20	46.00	-18.80	QP		
5		667.2900	36.80	-6.30	30.50	46.00	-15.50	QP		
6	*	820.5500	38.34	-2.41	35.93	46.00	-10.07	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #9

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Data: #10

Date: 2015/05/29



Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH157 5785

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		30.9700	41.31	-16.27	25.04	40.00	-14.96	QP		
2		138.6400	42.82	-17.70	25.12	43.50	-18.38	QP		
3		410.2400	36.89	-9.16	27.73	46.00	-18.27	QP		
4		551.8600	35.95	-7.38	28.57	46.00	-17.43	QP		
5		614.9100	36.09	-6.85	29.24	46.00	-16.76	QP		
6	*	820.5500	34.80	-2.41	32.39	46.00	-13.61	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #10

Page: 1

Spurious Emission (1G-18G)

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #125

Date: 15/06/03

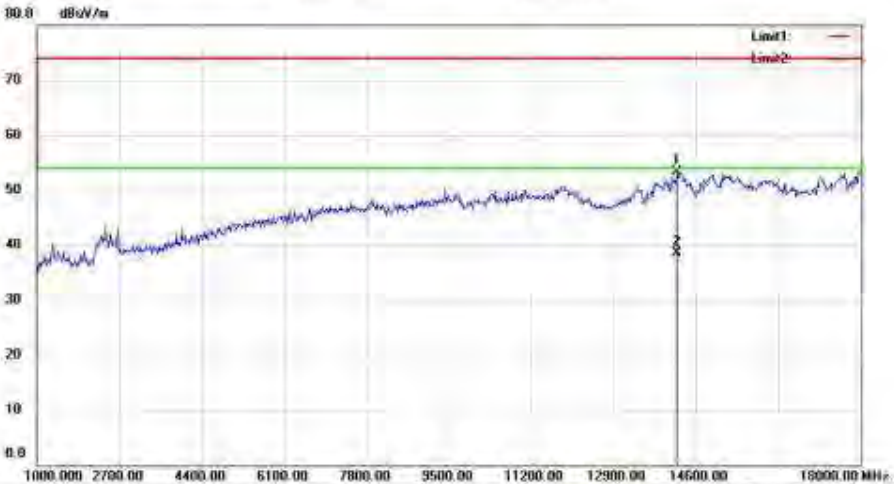

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11A CH36 5180
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14209.00	50.89	2.32	53.21	74.00	-20.79	peak		
2	*	14209.00	36.27	2.32	38.59	54.00	-15.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #125

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #126

Date: 15/06/03

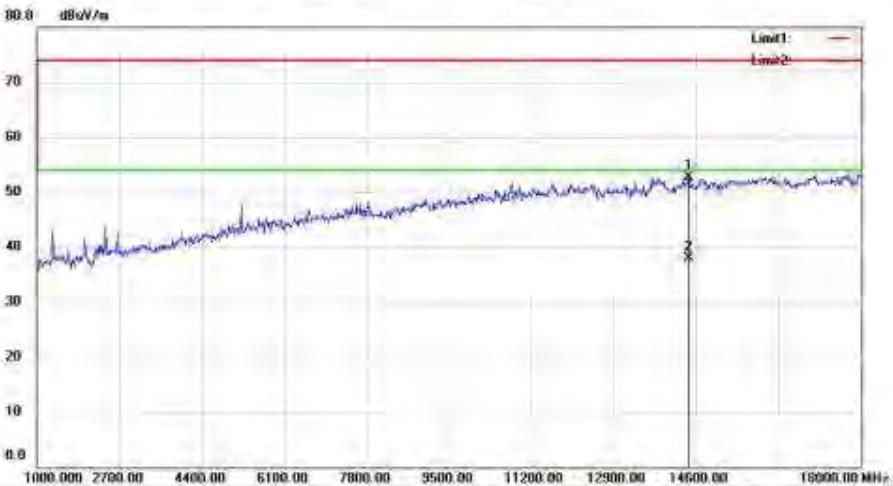

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH36 5180

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14447.00	50.45	2.16	52.61	74.00	-21.39	peak		
2	*	14447.00	35.79	2.16	37.95	54.00	-16.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#126

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #127

Date: 15/06/03

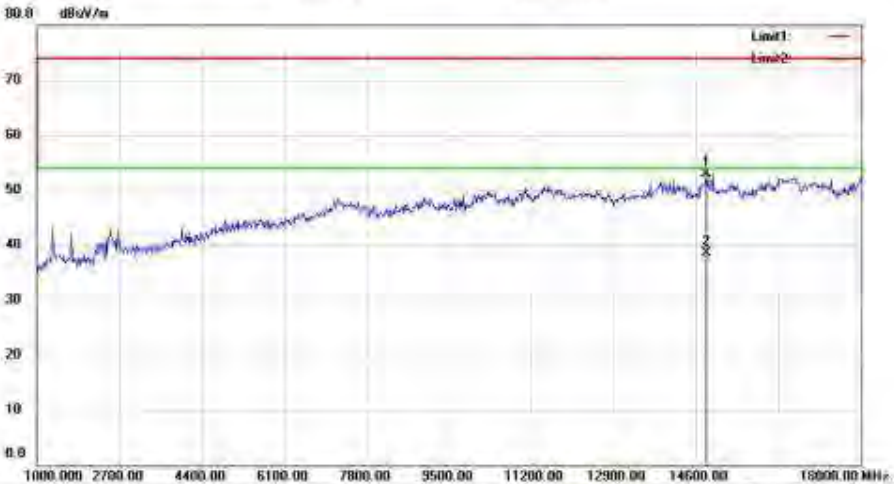

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH48 5240

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14804.00	51.01	1.90	52.91	74.00	-21.09	peak		
2	*	14804.00	36.64	1.90	38.54	54.00	-15.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #127

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #128

Date: 15/06/03

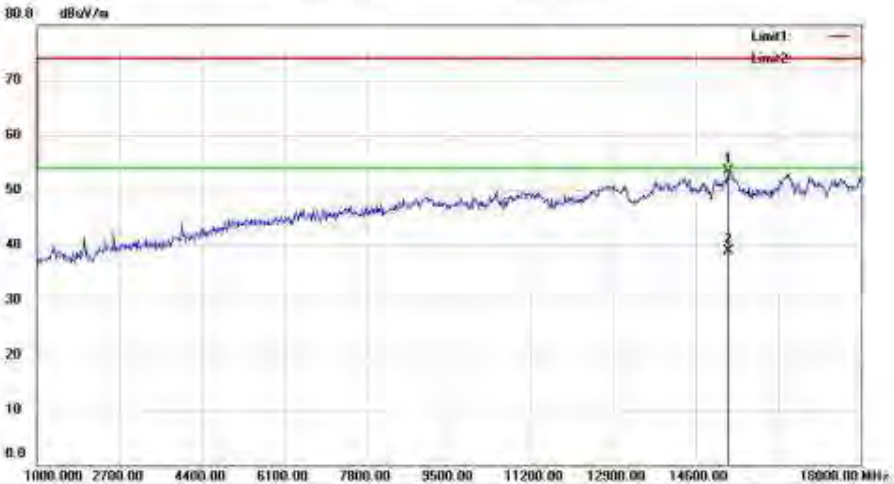

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH48 5240

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15263.00	52.75	0.74	53.49	74.00	-20.51	peak		
2	*	15263.00	38.23	0.74	38.97	54.00	-15.03	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #128

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Date: #129

Date: 15/06/20



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH149 5745

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		16776.00	51.00	1.14	52.14	74.00	-21.86	peak		
2	*	16776.00	37.10	1.14	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#129

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #130

Date: 15/06/03

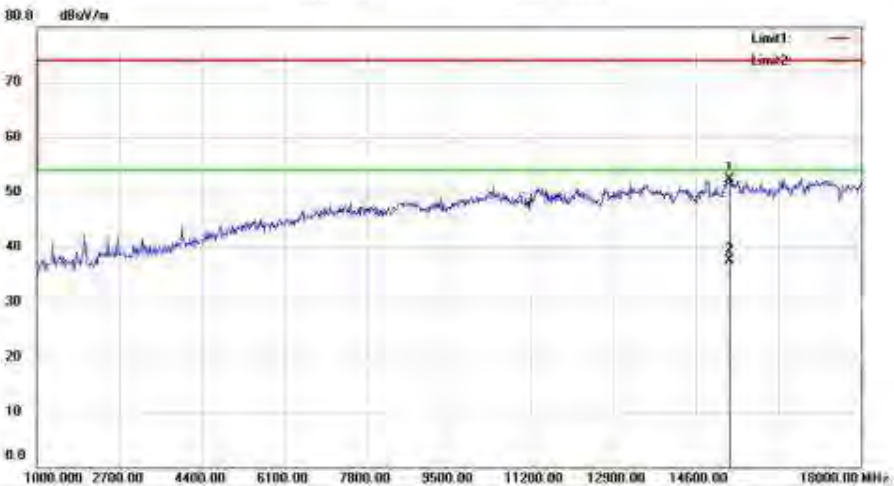

Site: site #1 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11A CH149 5745
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15297.00	51.77	0.62	52.39	74.00	-21.61	peak		
2	*	15297.00	36.86	0.62	37.48	54.00	-16.52	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #130

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #131

Date: 15/06/20

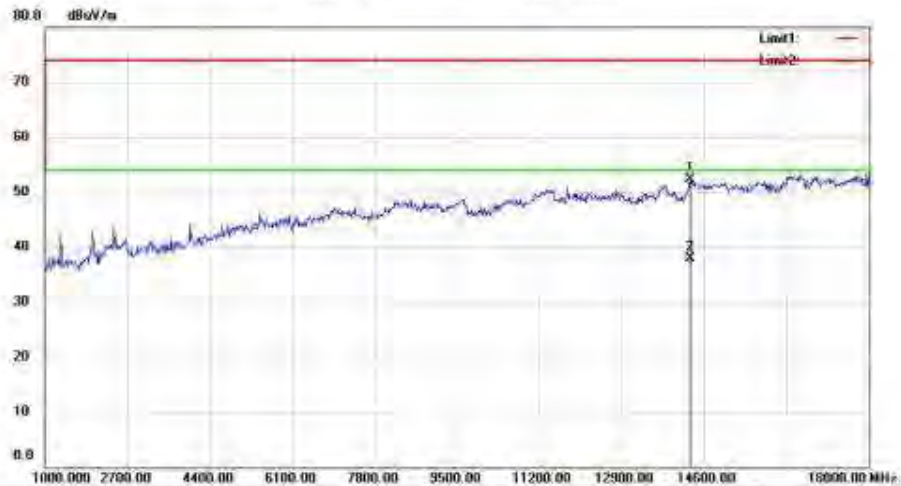

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH165 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14311.00	50.07	2.25	52.32	74.00	-21.68	peak		
2	*	14311.00	35.59	2.25	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #131

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #132

Date: 15/06/2023

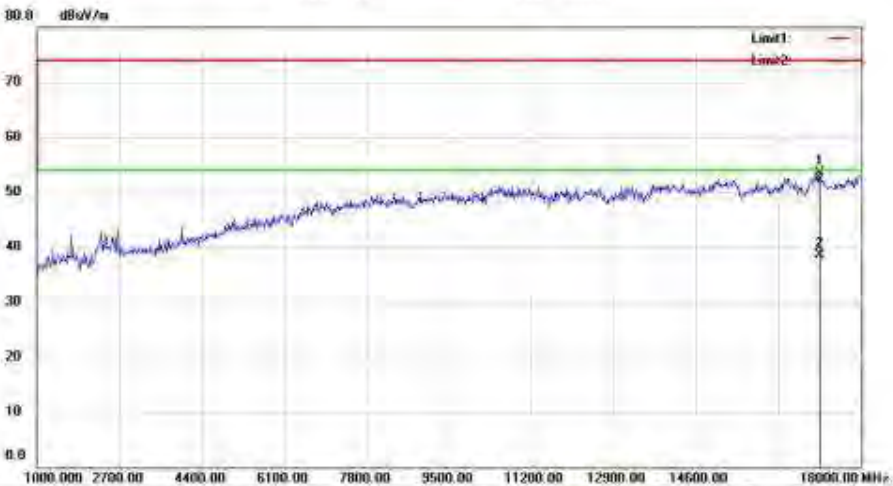

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11A CH165 5825
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17150.00	49.45	4.04	53.49	74.00	-20.51	peak		
2	*	17150.00	34.53	4.04	38.57	54.00	-15.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #132

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #133

Date: 15/06/20

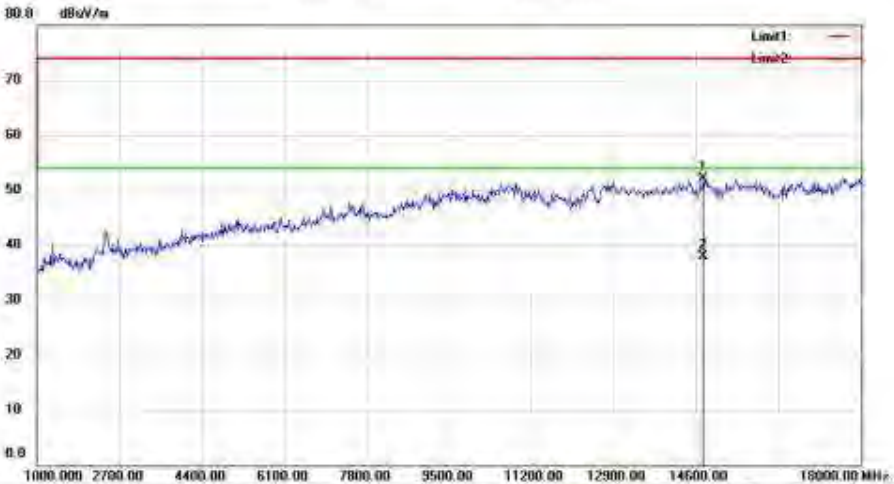

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N 20M CH36 5180
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14753.00	50.17	1.95	52.12	74.00	-21.88	peak		
2	*	14753.00	36.00	1.95	37.95	54.00	-16.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #133

Page: 1

Shanghai EMTEK Co., Ltd
Building 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #134

Date: 15/06/20

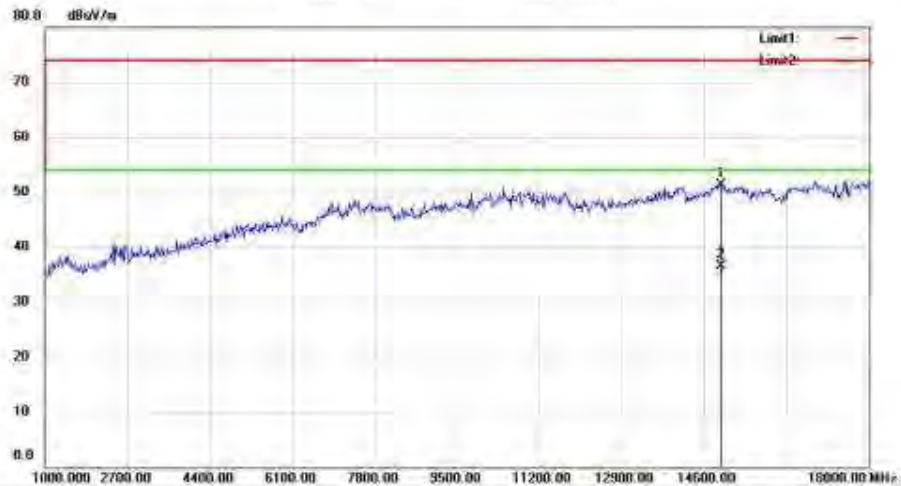

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH36 5180

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14940.00	49.49	1.82	51.31	74.00	-22.69	peak		
2	*	14940.00	34.77	1.82	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #134

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #135

Date: 15/06/03

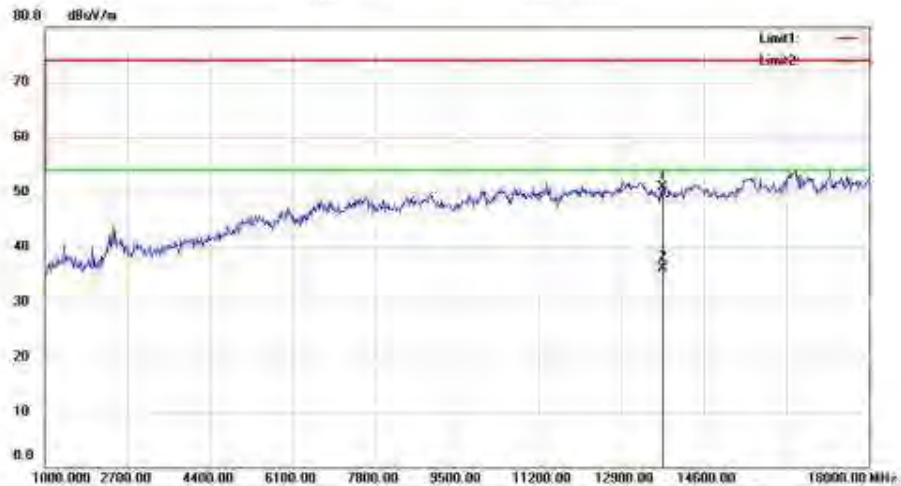

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH38 5190

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13750.00	49.55	1.42	50.97	74.00	-23.03	peak		
2	*	13750.00	34.78	1.42	36.20	54.00	-17.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #135

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #136

Date: 15/06/03

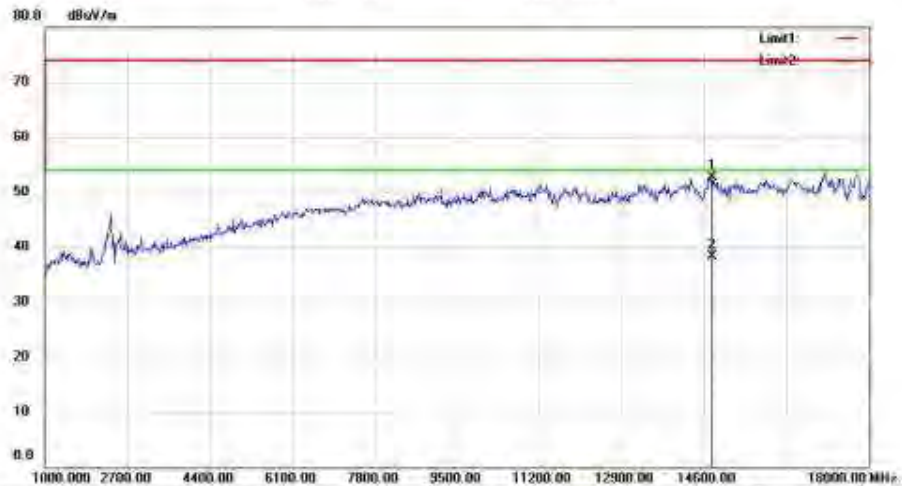

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH38 5190

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14770.00	50.74	1.93	52.67	74.00	-21.33	peak		
2	*	14770.00	36.31	1.93	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #136

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #137

Date: 15/06/03

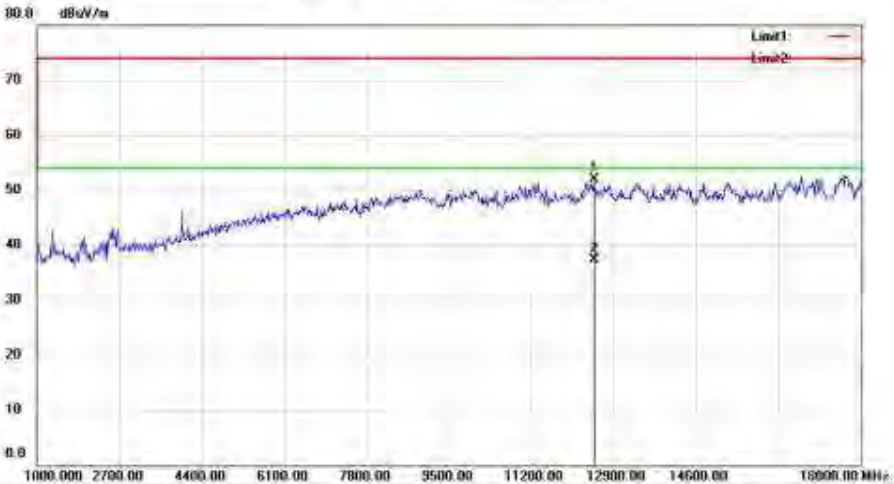

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 20M CH36 5180
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		12492.00	54.77	-2.84	51.93	74.00	-22.07	peak		
2	*	12492.00	40.14	-2.84	37.30	54.00	-16.70	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #137

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #138

Date: 15/06/03

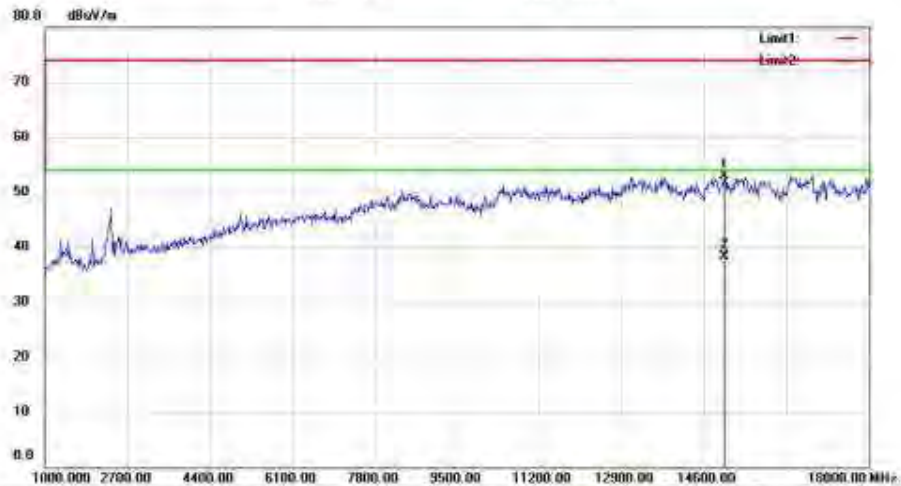

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH36 5180

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15008.00	51.20	1.74	52.94	74.00	-21.06	peak		
2	*	15008.00	36.52	1.74	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #138

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #139

Date: 15/06/03

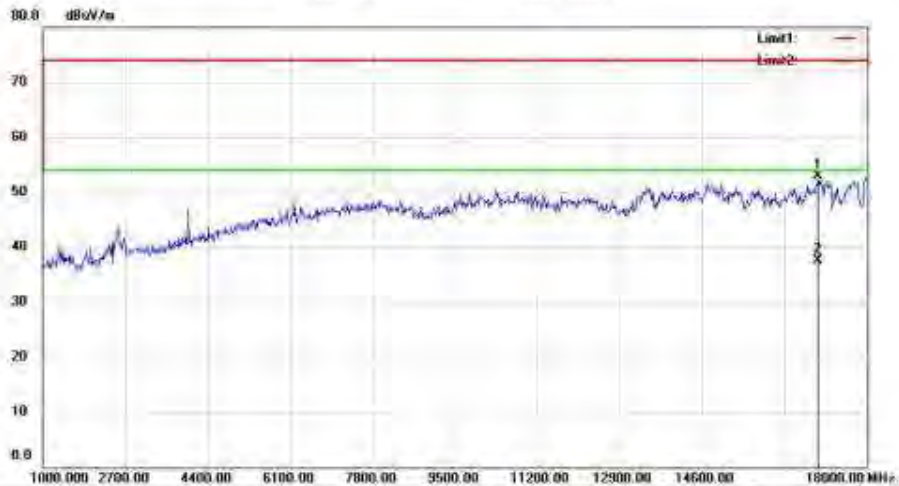

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 40M CH38 5190

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16997.00	50.75	2.06	52.81	74.00	-21.19	peak		
2	*	16997.00	35.51	2.06	37.57	54.00	-16.43	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #139

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #140

Date: 15/06/20

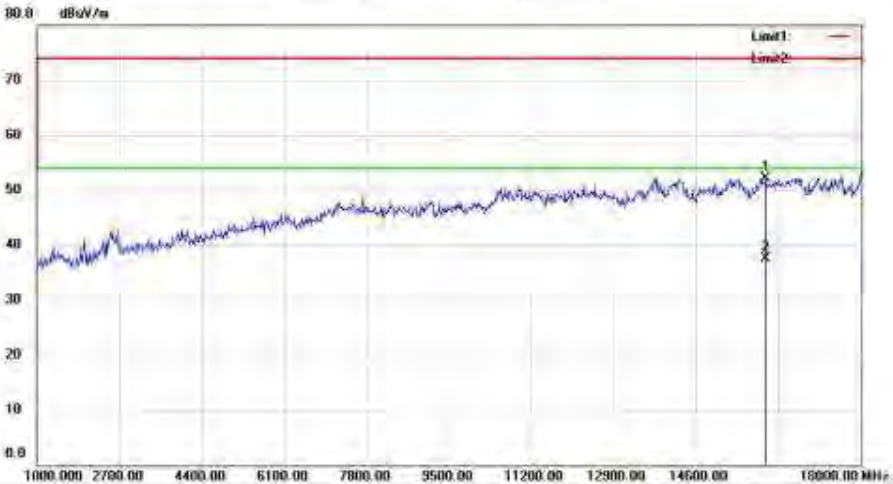

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 40M CH38 5190

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16045.00	53.92	-1.91	52.01	74.00	-21.99	peak		
2	*	16045.00	39.45	-1.91	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #140

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #141

Date: 15/06/03

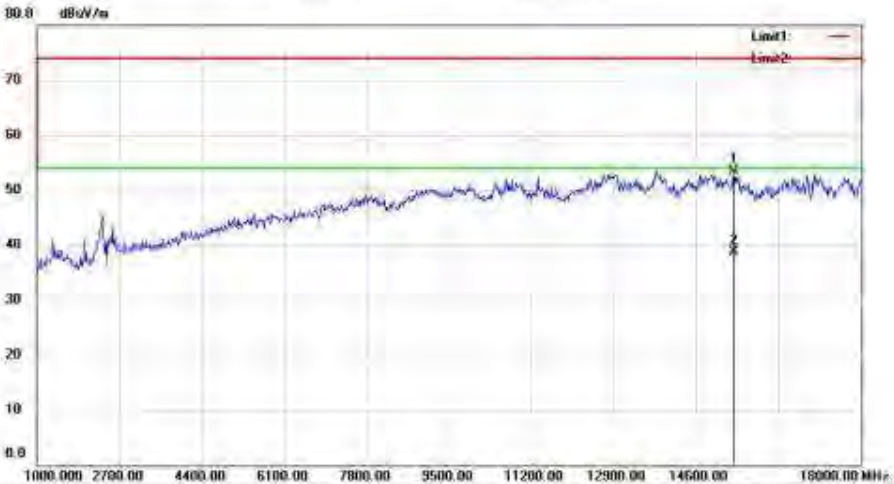

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 80M CH42 5210

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		15382.00	53.23	0.30	53.53	74.00	-20.47	peak		
2	*	15382.00	38.38	0.30	38.68	54.00	-15.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #141

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #142

Date: 15/06/03

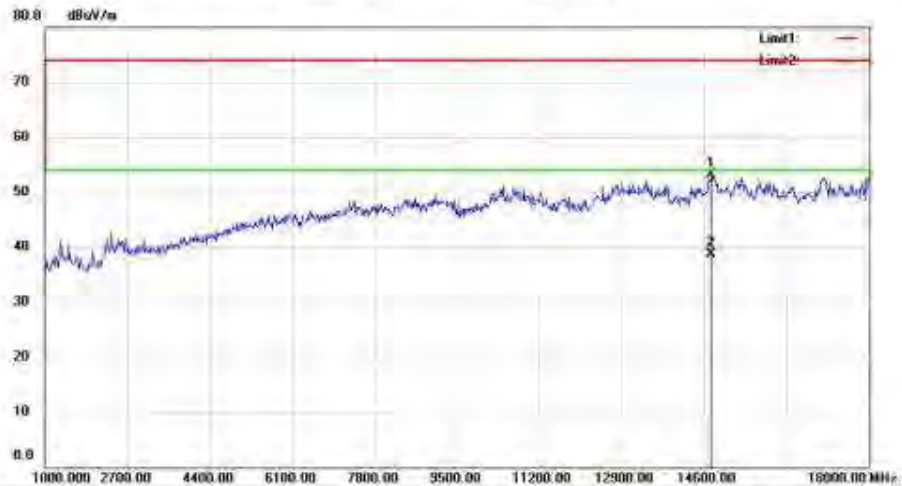

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 80M CH42 5210

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14753.00	51.08	1.95	53.03	74.00	-20.97	peak		
2	*	14753.00	36.72	1.95	38.67	54.00	-15.33	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #142

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #143

Date: 15/06/03

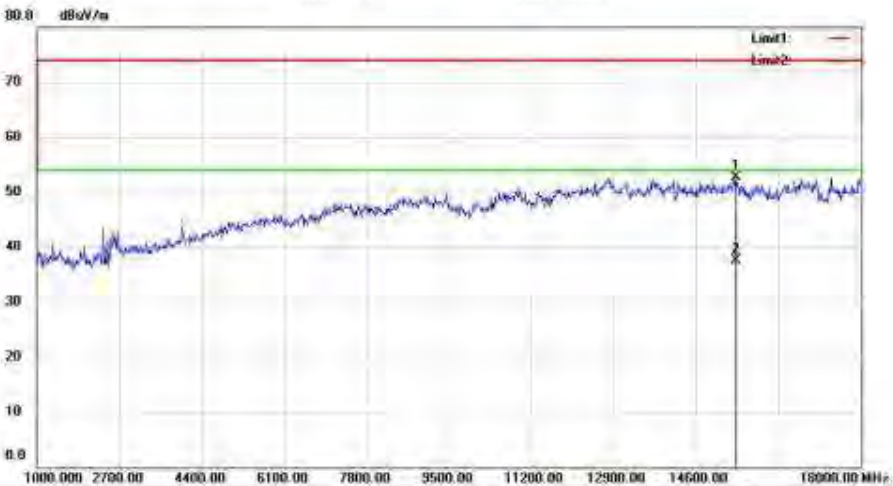

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH40 5200

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		15416.00	52.57	0.16	52.73	74.00	-21.27	peak		
2	*	15416.00	37.36	0.16	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #143

Page: 1

Shenzhen EMTEK Co., Ltd
Building 88 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #144

Date: 15/06/03

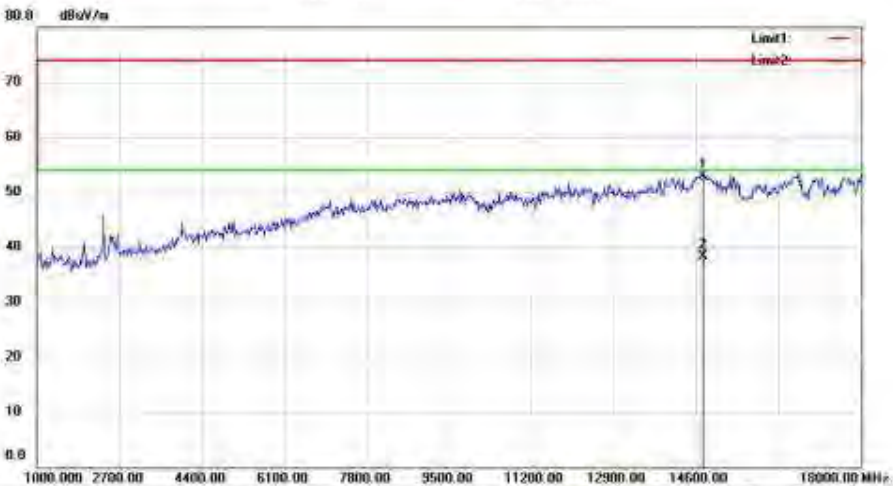

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH40 5200

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14753.00	51.05	1.95	53.00	74.00	-21.00	peak		
2	*	14753.00	36.30	1.95	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#144

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #145

Date: 15/06/20

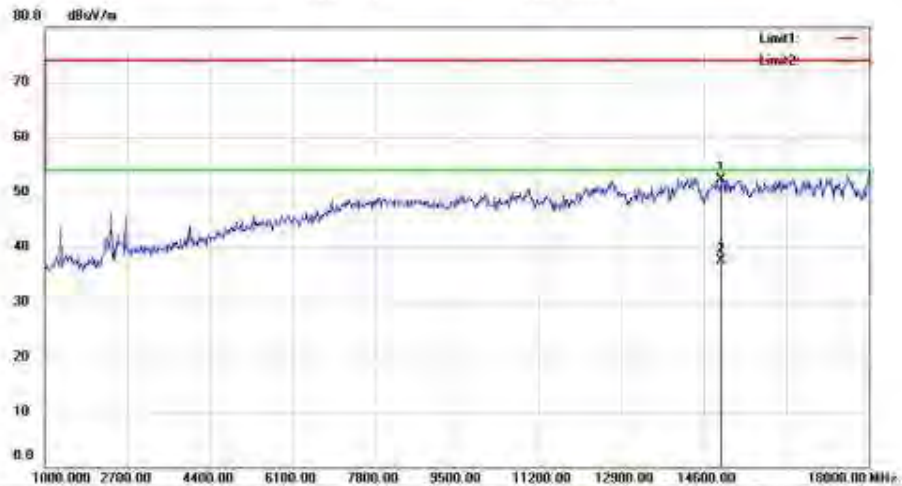

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH157 5785

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14940.00	50.55	1.82	52.37	74.00	-21.63	peak		
2	*	14940.00	35.77	1.82	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #145

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #146

Date: 15/06/03

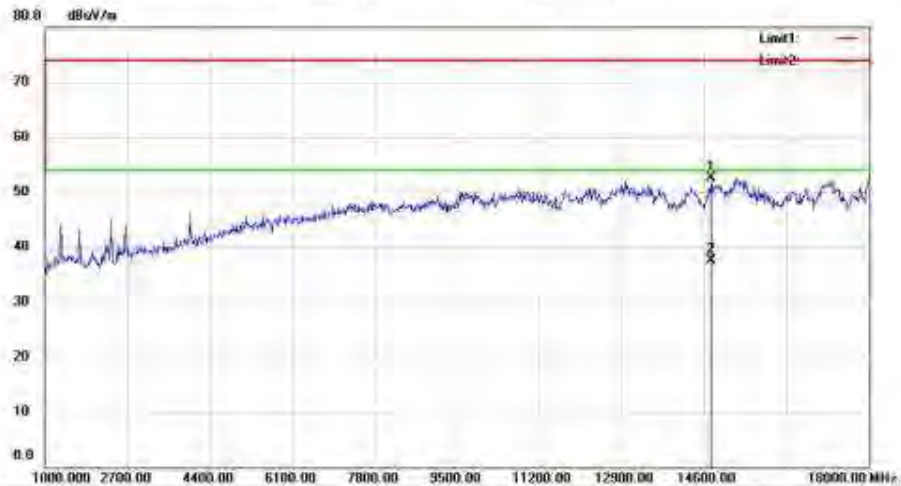

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11A CH157 5785

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14753.00	50.56	1.95	52.51	74.00	-21.49	peak		
2	*	14753.00	35.63	1.95	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#146

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #147

Date: 15/06/03

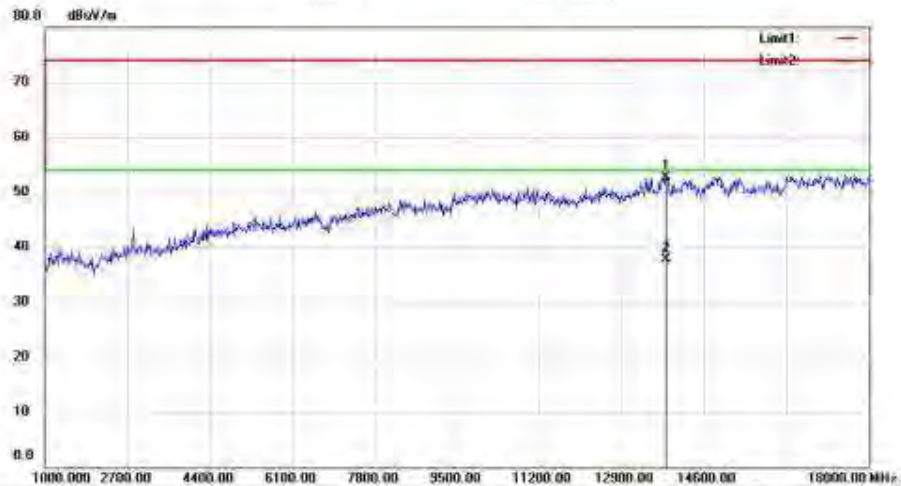

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH44 5220

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13818.00	47.80	4.93	52.73	74.00	-21.27	peak		
2	*	13818.00	32.71	4.93	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #147

Page: 1

Shanghai EMTEK Co., Ltd
Building 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #148

Date: 15/06/03

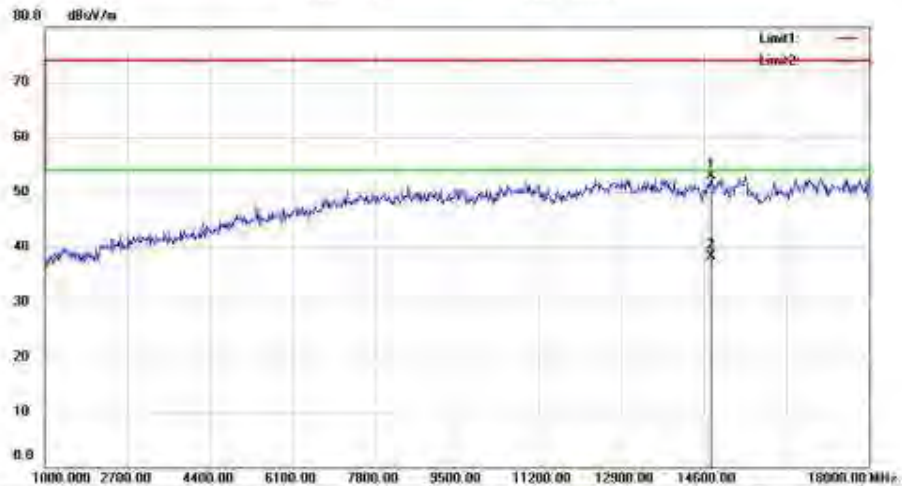

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH44 5220

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak		
2	*	14753.00	32.91	5.33	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #148

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #149

Date: 15/06/03

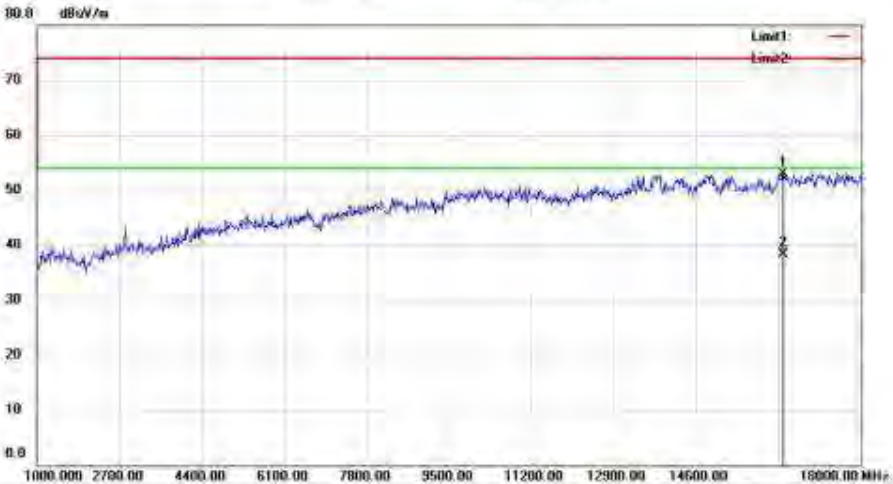

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH48 5240

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16402.00	49.85	3.10	52.95	74.00	-21.05	peak		
2	*	16402.00	35.13	3.10	38.23	54.00	-15.77	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #149

Page: 1

Shanghai EMTEK Co., Ltd
Bldg.88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #150

Date: 15/06/03

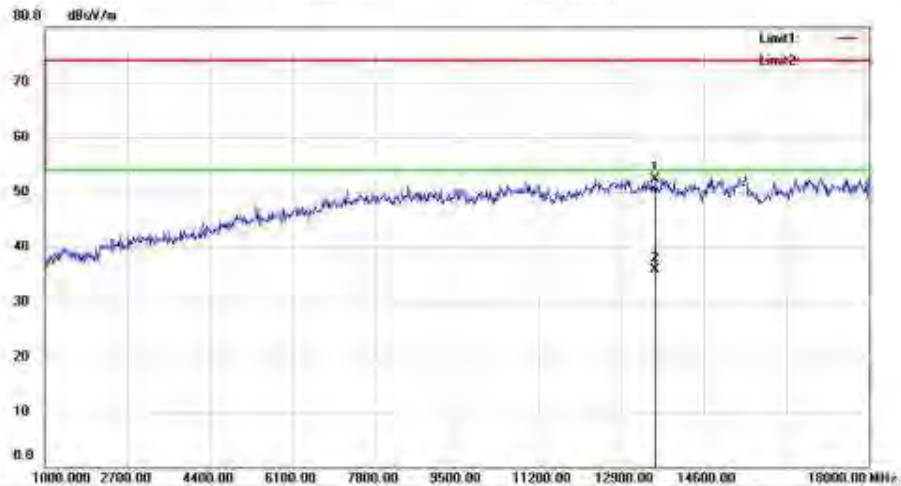

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH48 5240

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13580.00	48.43	3.96	52.39	74.00	-21.61	peak		
2	*	13580.00	31.98	3.96	35.94	54.00	-18.06	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #150

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #151

Date: 15/06/03

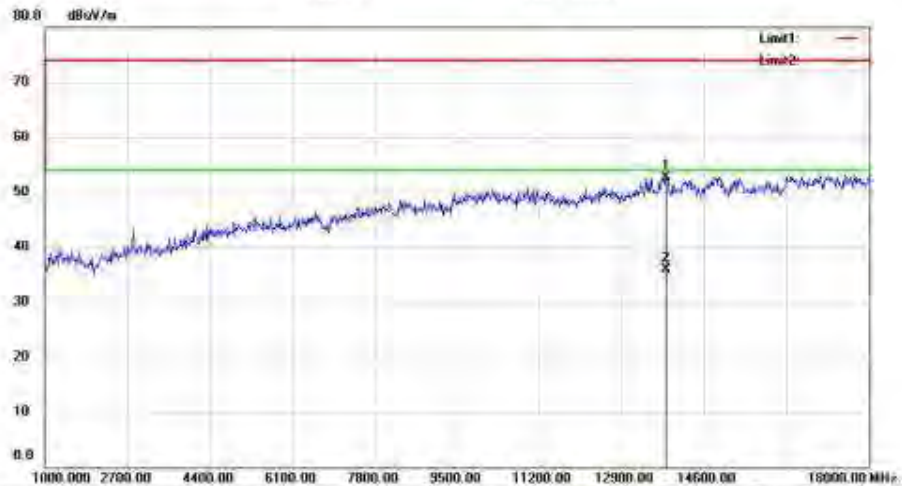

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH149 5745

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13818.00	47.80	4.93	52.73	74.00	-21.27	peak		
2	*	13818.00	31.01	4.93	35.94	54.00	-18.06	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #151

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #152

Date: 15/06/03

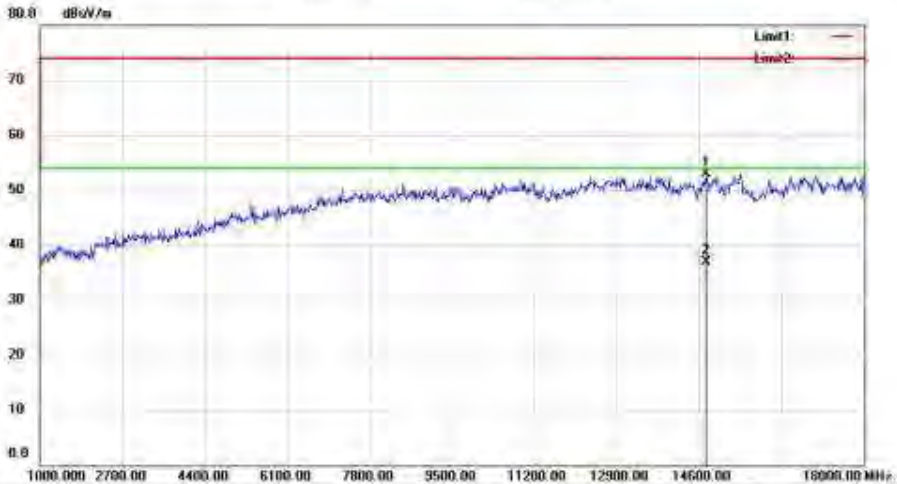

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH149 5745

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14753.00	47.55	5.33	52.88	74.00	-21.12	peak		
2	*	14753.00	31.52	5.33	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #152

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #153

Date: 15/06/08

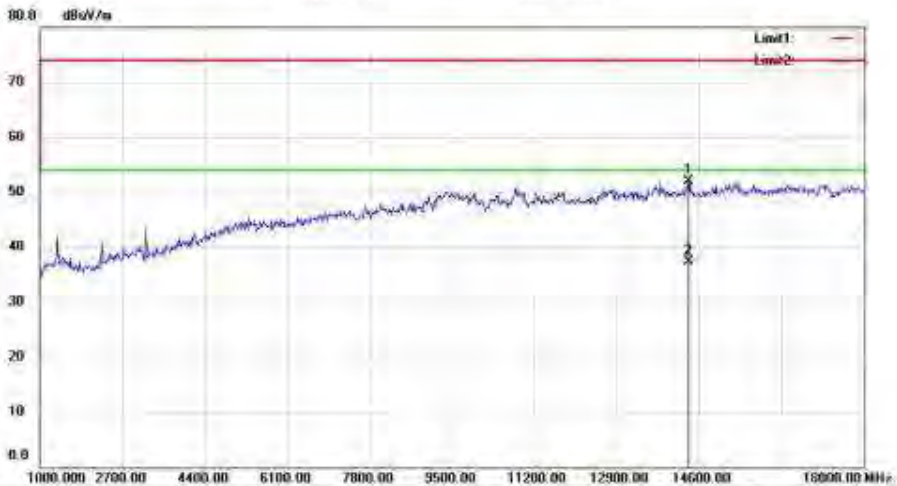

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N 20M CH157 5785
Note:
Polarization: Vertical
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14379.00	48.63	3.33	51.96	74.00	-22.04	peak		
2	*	14379.00	33.96	3.33	37.29	54.00	-16.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #153

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #154

Date: 15/06/08

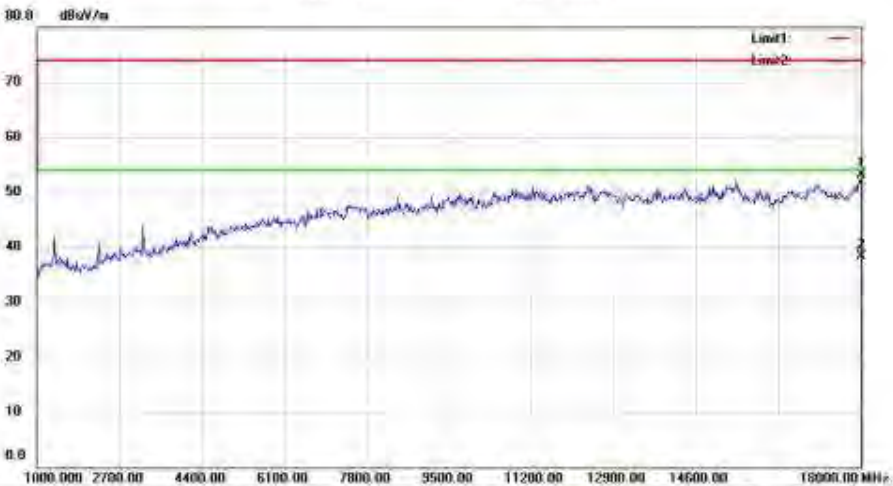

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE) FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N 20M CH157 5785
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	37.96	15.12	53.08	74.00	-20.92	peak		
2	*	18000.00	23.12	15.12	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #154

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #155

Date: 15/06/08

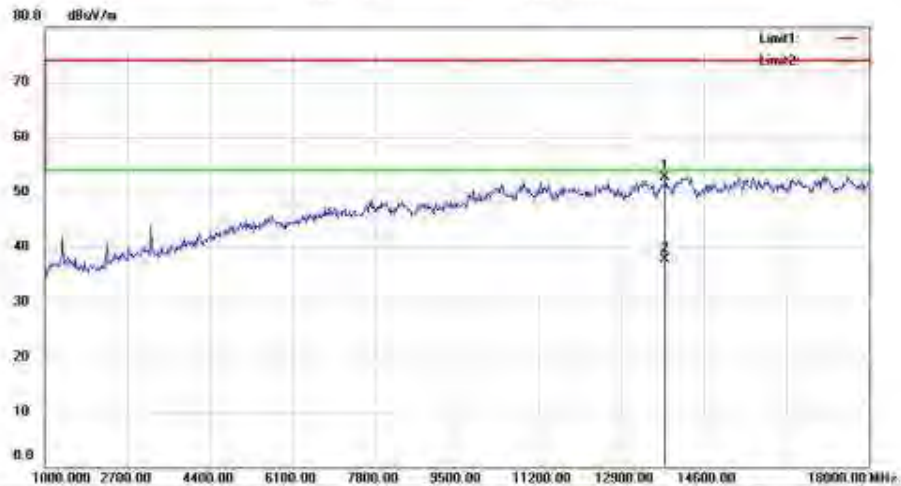

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH165 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13801.00	49.77	2.96	52.73	74.00	-21.27	peak		
2	*	13801.00	34.68	2.96	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #155

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #156

Date: 15/06/08

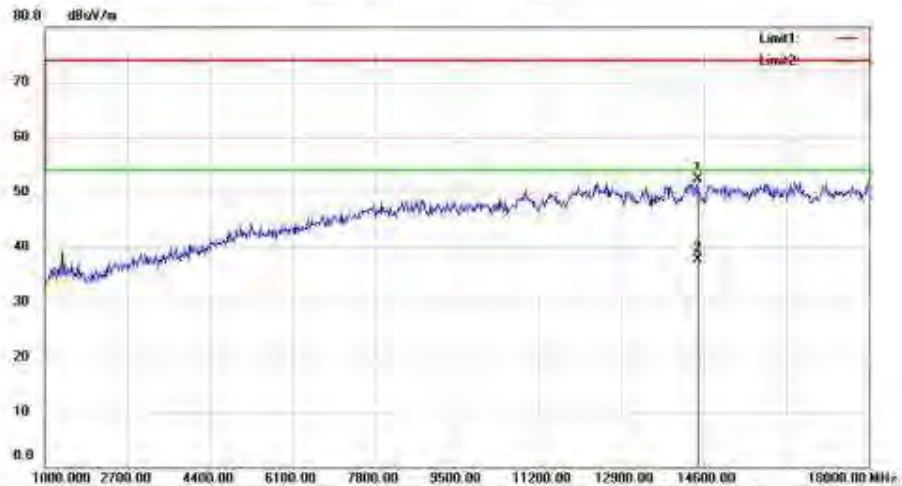

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 20M CH165 5825

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14464.00	49.09	3.21	52.30	74.00	-21.70	peak		
2	*	14464.00	34.47	3.21	37.68	54.00	-16.32	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #156

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #157

Date: 15/06/08

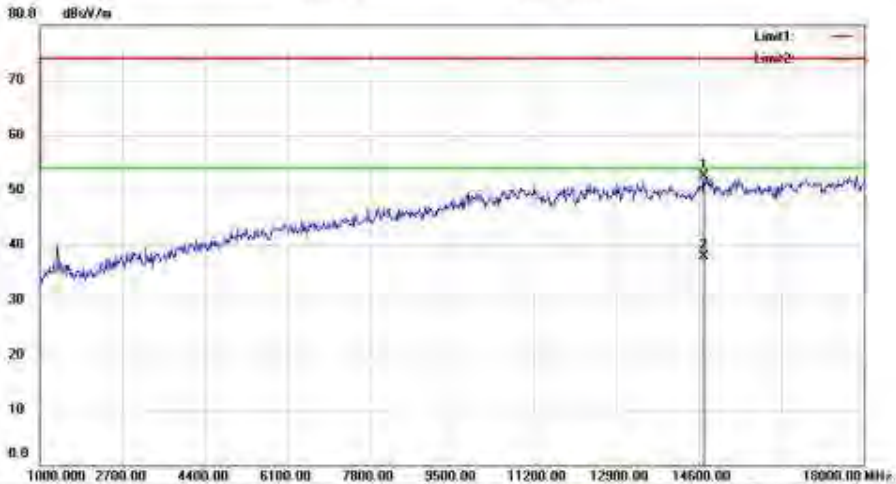

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH46 5230

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14702.00	49.59	2.88	52.47	74.00	-21.53	peak		
2	*	14702.00	34.96	2.88	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #157

Page: 1

Shanghai EMTEK Co., Ltd
Bldg.88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #158

Date: 15/06/08

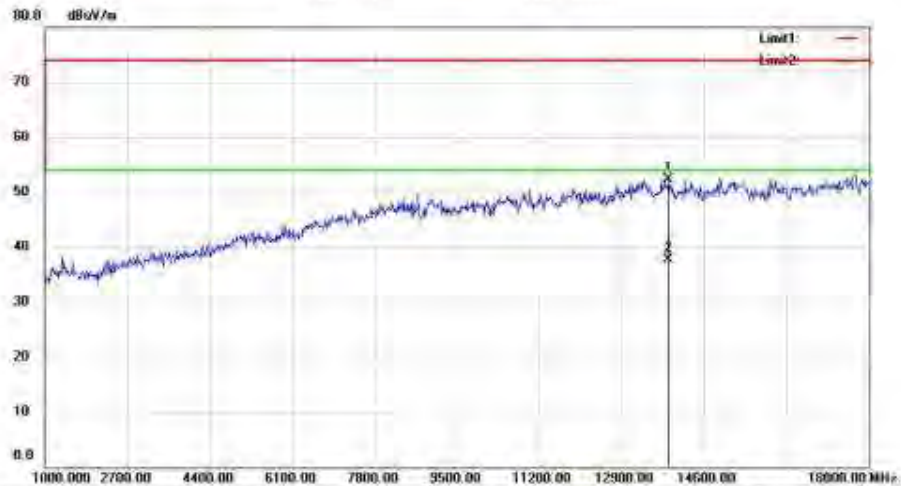

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH46 5230

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13869.00	49.09	3.28	52.37	74.00	-21.63	peak		
2	*	13869.00	34.34	3.28	37.62	54.00	-16.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #158

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg.88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #159

Date: 15/06/08

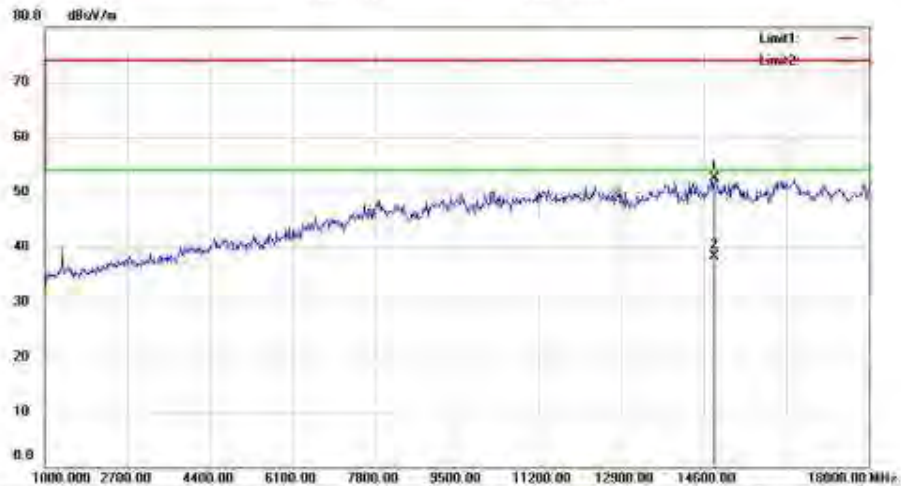

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH151 5755

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14804.00	49.84	2.72	52.56	74.00	-21.44	peak		
2	*	14804.00	35.52	2.72	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #159

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 5G

Data: #160

Date: 15/06/08



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH151 5755

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16844.00	50.37	2.20	52.57	74.00	-21.43	peak		
2	*	16844.00	35.44	2.20	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #160

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #161

Date: 15/06/08

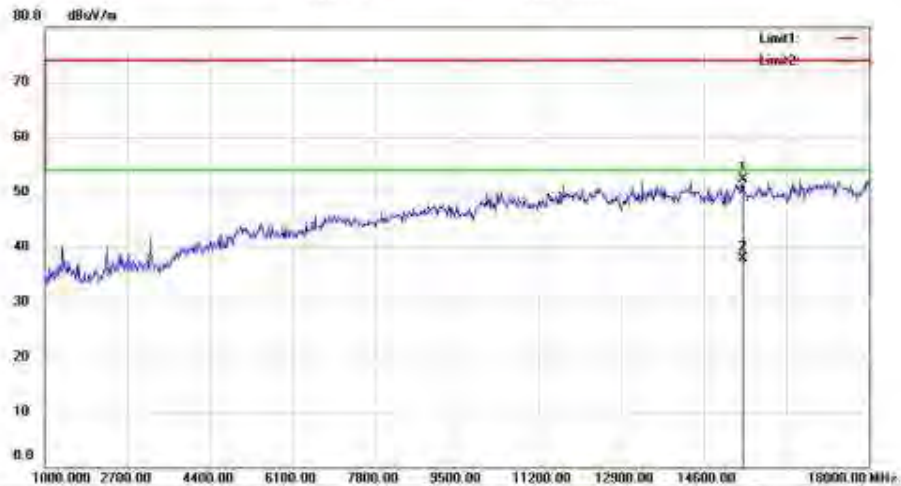

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH159 5795

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15399.00	51.44	0.95	52.39	74.00	-21.61	peak		
2	*	15399.00	36.87	0.95	37.82	54.00	-16.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #161

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #162

Date: 15/06/08

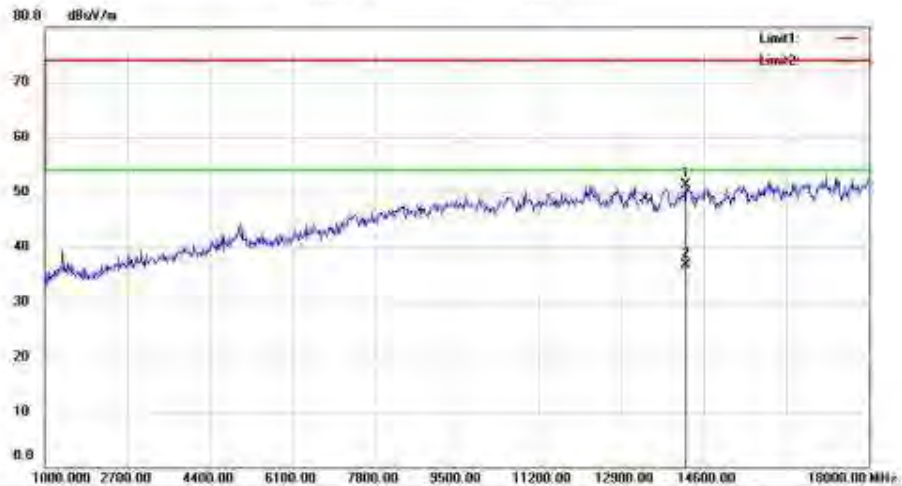

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N 40M CH159 5795

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14226.00	47.69	3.55	51.24	74.00	-22.76	peak		
2	*	14226.00	33.09	3.55	36.64	54.00	-17.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #162

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #163

Date: 15/06/08

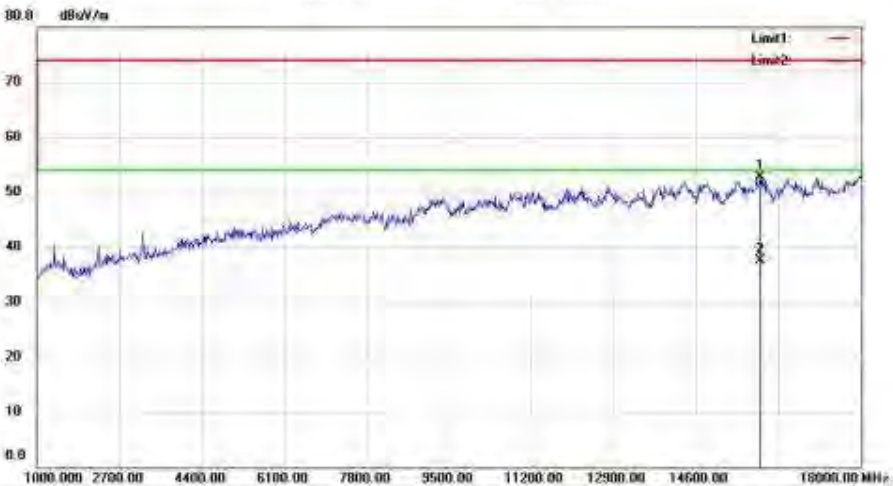

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH44 5220

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15926.00	53.68	-1.03	52.65	74.00	-21.35	peak		
2	*	15926.00	38.57	-1.03	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #163

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #164

Date: 15/06/08

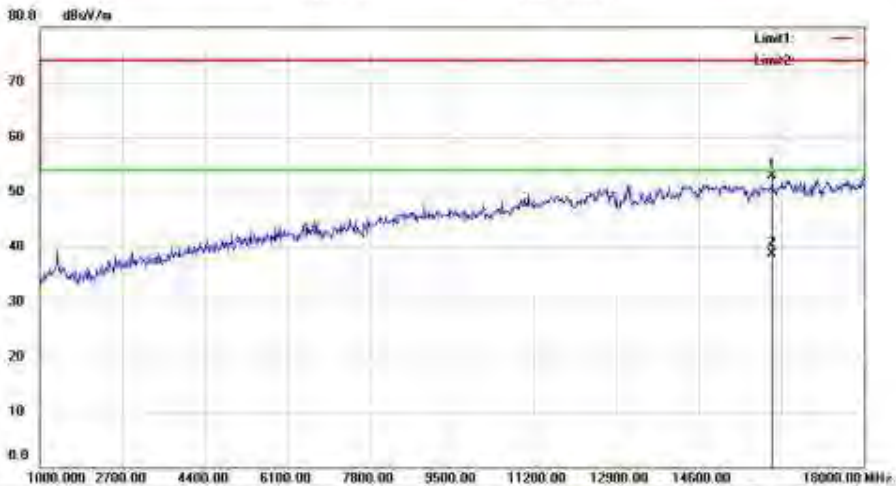

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 20M CH44 5220
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Delta
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		16113.00	53.83	-0.83	53.00	74.00	-21.00	peak	
2	*	16113.00	39.45	-0.83	38.62	54.00	-15.38	AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #164

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #165

Date: 15/06/08

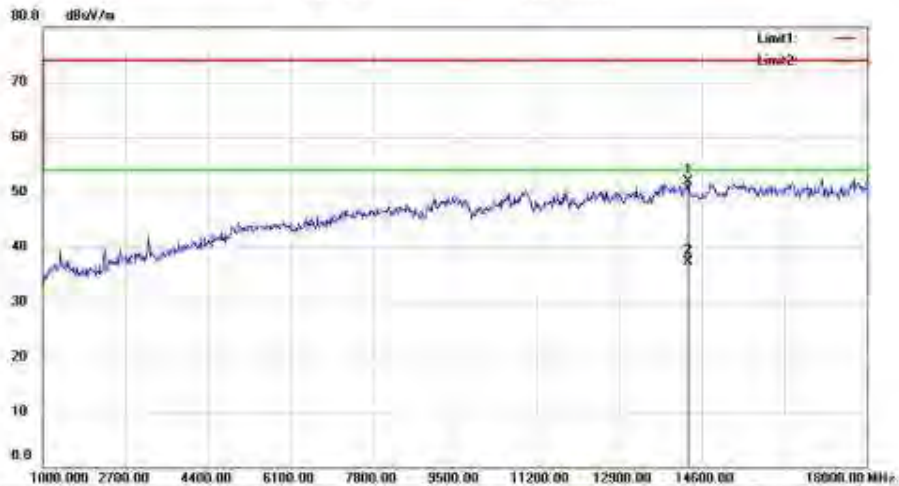

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH48 5240

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14311.00	48.53	3.43	51.96	74.00	-22.04	peak		
2	*	14311.00	33.81	3.43	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #165

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #166

Date: 15/06/08

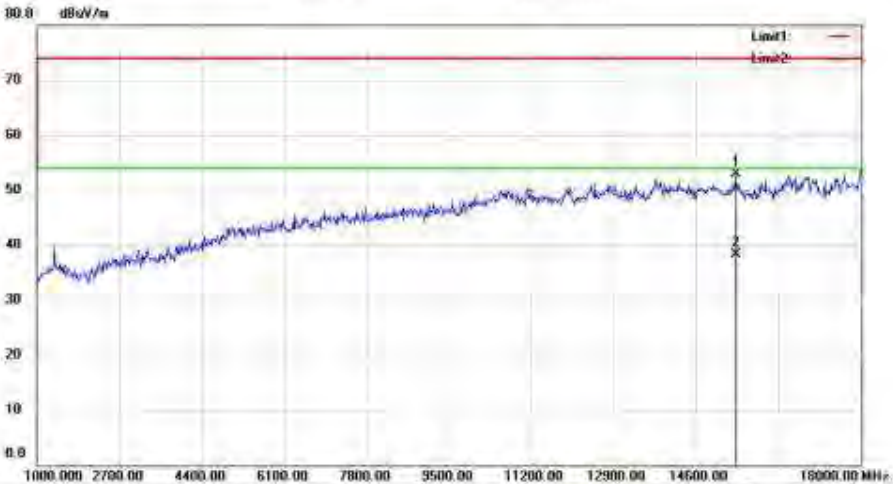

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH48 5240

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15416.00	51.99	0.89	52.88	74.00	-21.12	peak		
2	*	15416.00	37.45	0.89	38.34	54.00	-15.66	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #166

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #167

Date: 15/06/08

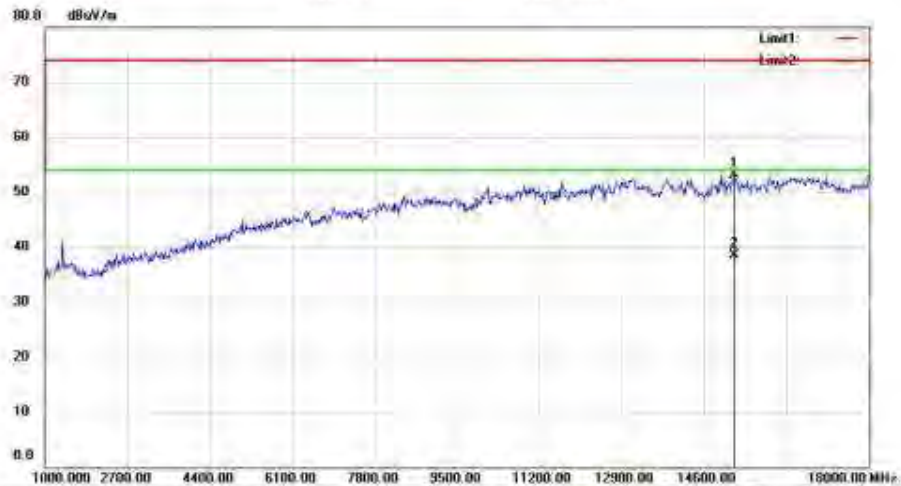

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH149 5745

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		15229.00	51.61	1.59	53.20	74.00	-20.80	peak		
2	*	15229.00	36.83	1.59	38.42	54.00	-15.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #167

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #168

Date: 15/06/08

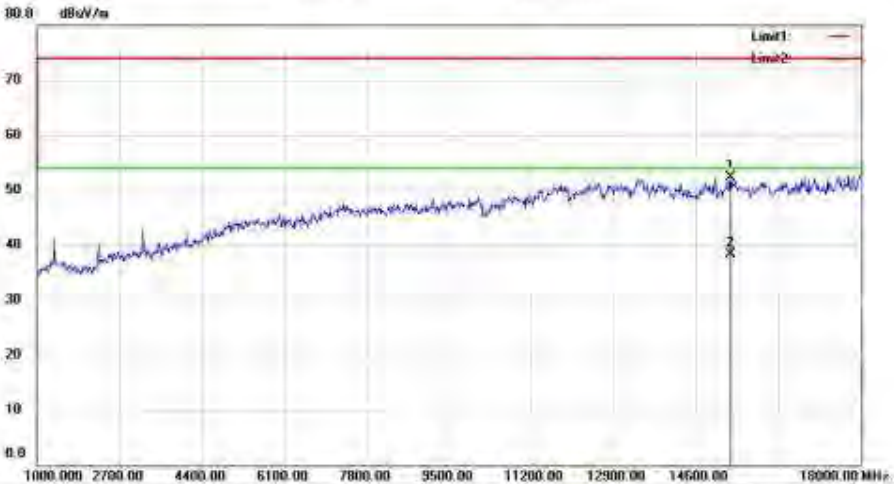

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 20M CH149 5745
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15314.00	50.96	1.27	52.23	74.00	-21.77	peak		
2	*	15314.00	36.94	1.27	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #168

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #169

Date: 15/06/08

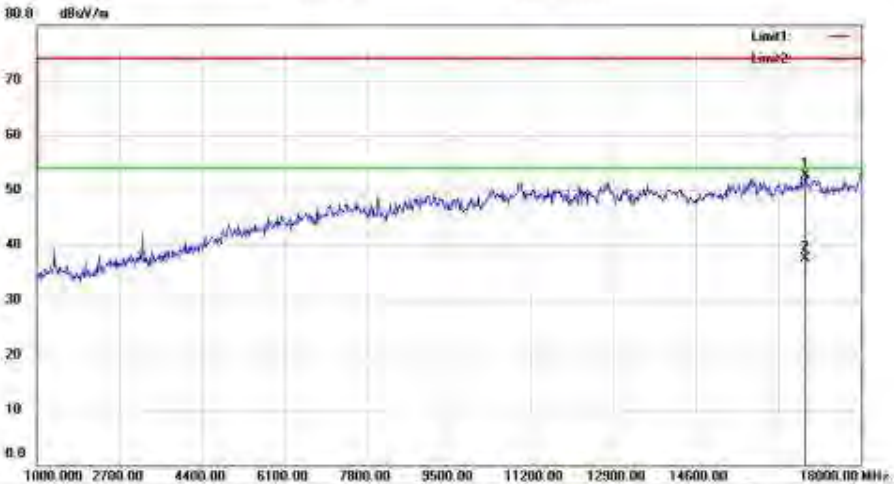

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 20M CH157 5785
Note:
Polarization: Vertical
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16844.00	50.42	2.20	52.62	74.00	-21.38	peak		
2	*	16844.00	35.32	2.20	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #169

Page: 1

Shanghai EMTEK Co., Ltd
Building 88 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #170

Date: 15/06/08

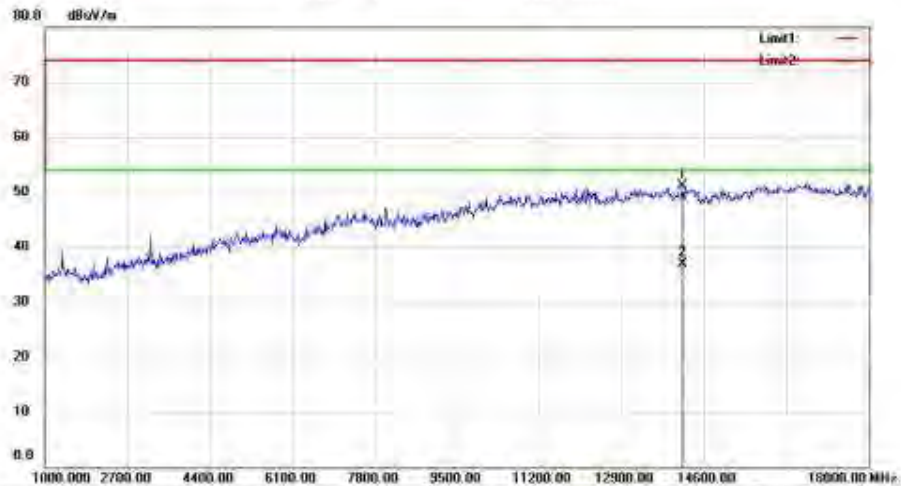

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH157 5785

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14158.00	47.37	3.65	51.02	74.00	-22.98	peak		
2	*	14158.00	33.19	3.65	36.84	54.00	-17.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #170

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #171

Date: 15/06/08

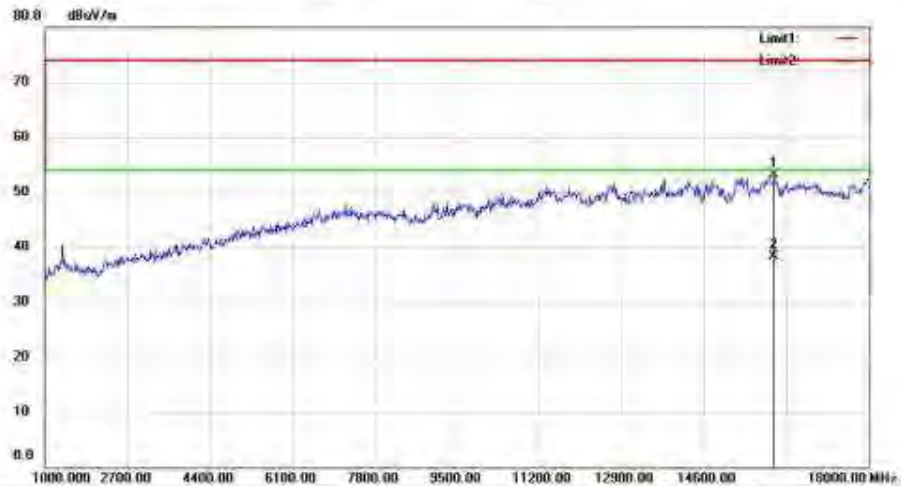

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH165 5825

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16045.00	54.30	-1.11	53.19	74.00	-20.81	peak		
2	*	16045.00	39.34	-1.11	38.23	54.00	-15.77	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #171

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #172

Date: 15/06/08

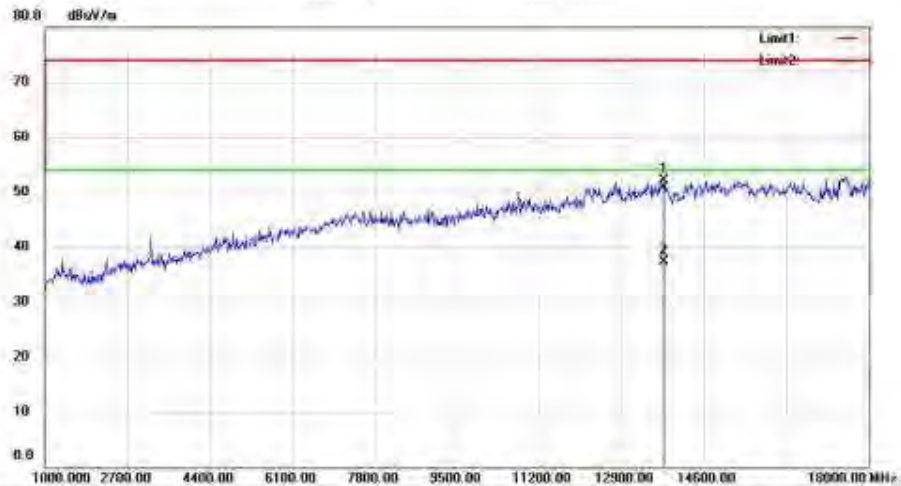

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 20M CH165 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13767.00	49.24	2.80	52.04	74.00	-21.96	peak		
2	*	13767.00	34.41	2.80	37.21	54.00	-16.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #172

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #173

Date: 15/06/08

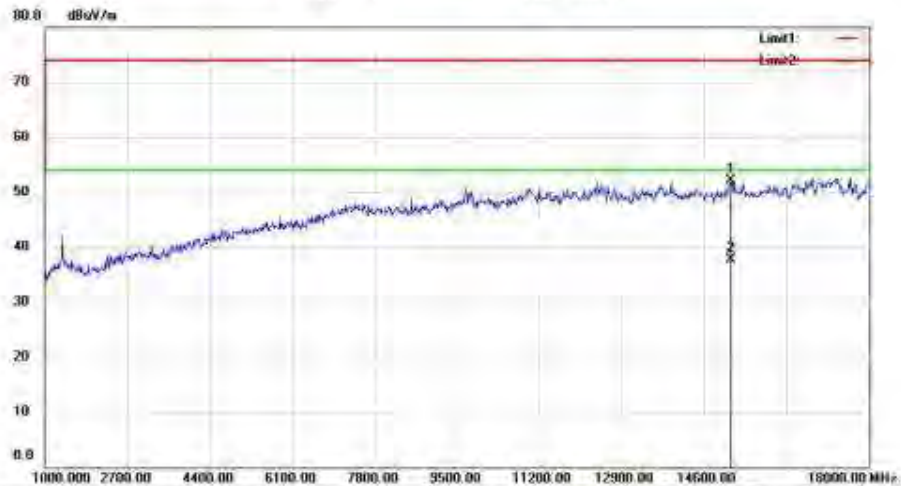

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 40M CH46 5230

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15161.00	50.28	1.85	52.13	74.00	-21.87	peak		
2	*	15161.00	35.79	1.85	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data_#173

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #174

Date: 15/06/08

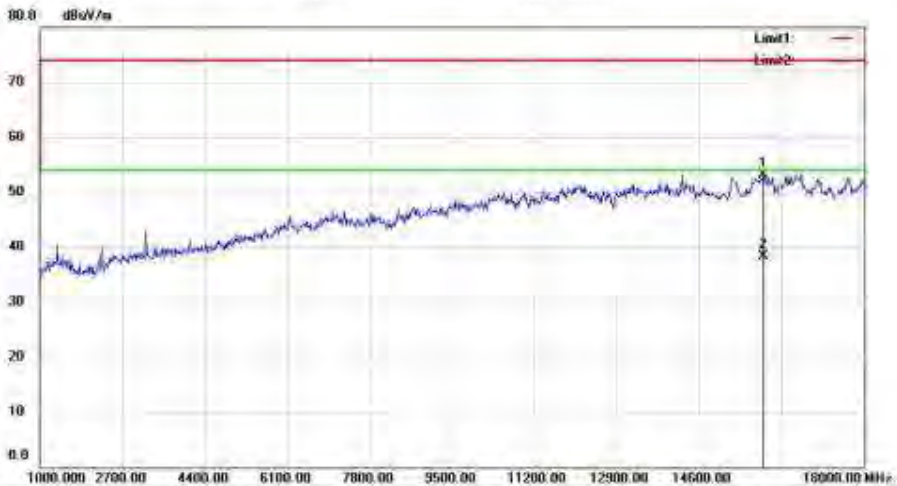

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 40M CH46 5230

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		15926.00	54.21	-1.03	53.18	74.00	-20.82	peak		
2	*	15926.00	39.37	-1.03	38.34	54.00	-15.66	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #174

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #175

Date: 15/06/08

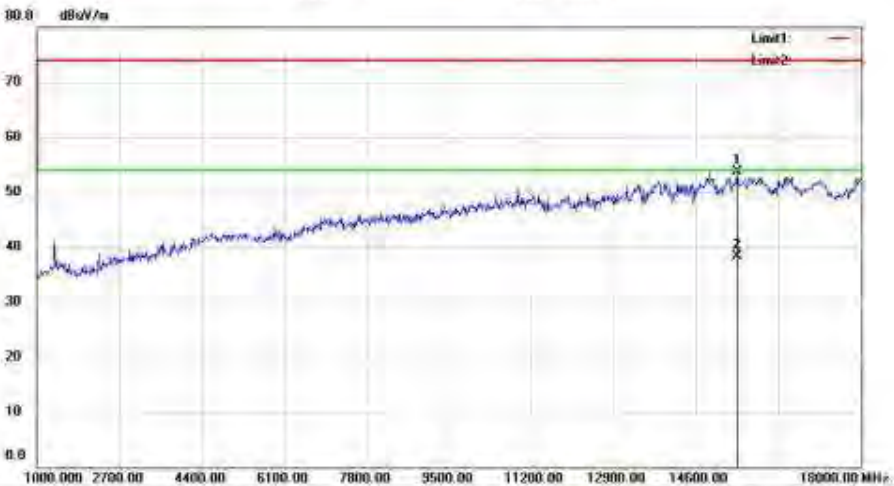

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 40M CH151 5755
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15450.00	52.90	0.75	53.65	74.00	-20.35	peak		
2	*	15450.00	37.49	0.75	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #175

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #176

Date: 15/06/08

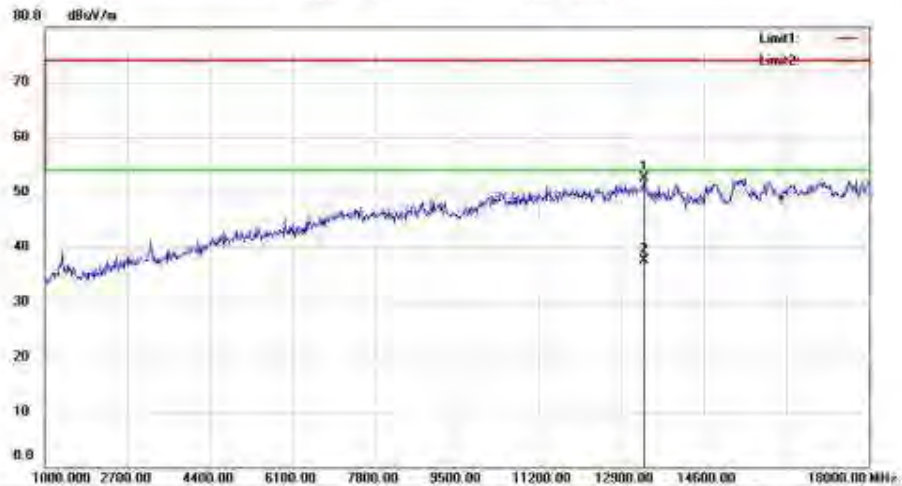

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 40M CH151 5755
Note:
Polarization: Vertical
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13359.00	51.48	0.96	52.44	74.00	-21.56	peak		
2	*	13359.00	36.62	0.96	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #176

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #177

Date: 15/06/08

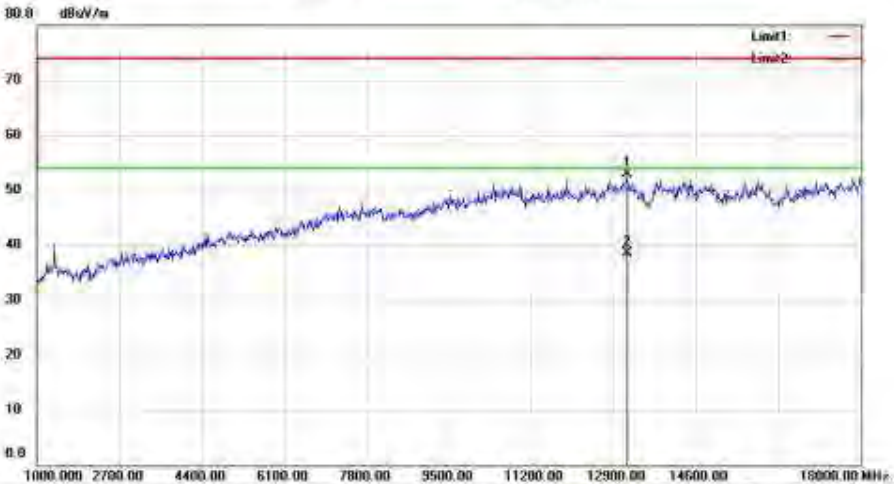

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC 40M CH159 5795
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13172.00	52.72	0.12	52.84	74.00	-21.16	peak		
2	*	13172.00	38.29	0.12	38.41	54.00	-15.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #177

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #178

Date: 15/06/08

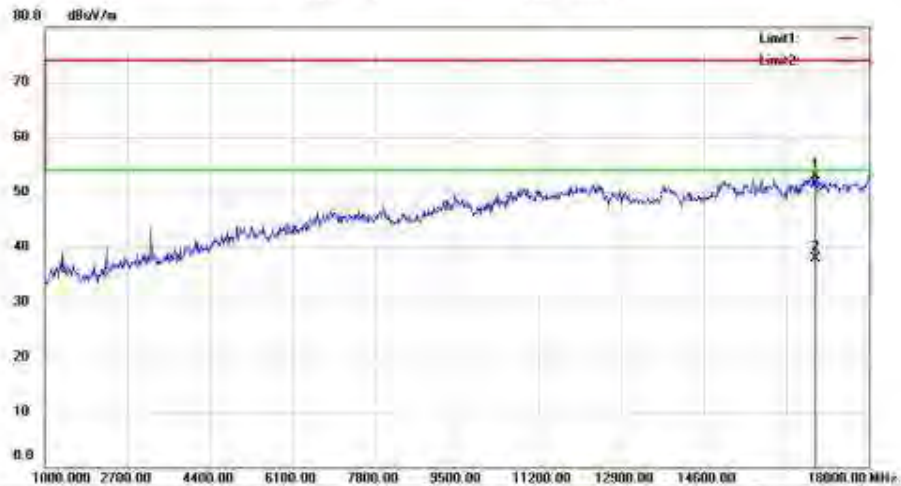

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 40M CH159 5795

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16895.00	50.57	2.41	52.98	74.00	-21.02	peak		
2	*	16895.00	35.43	2.41	37.84	54.00	-16.16	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #178

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Data: #179

Date: 15/06/08

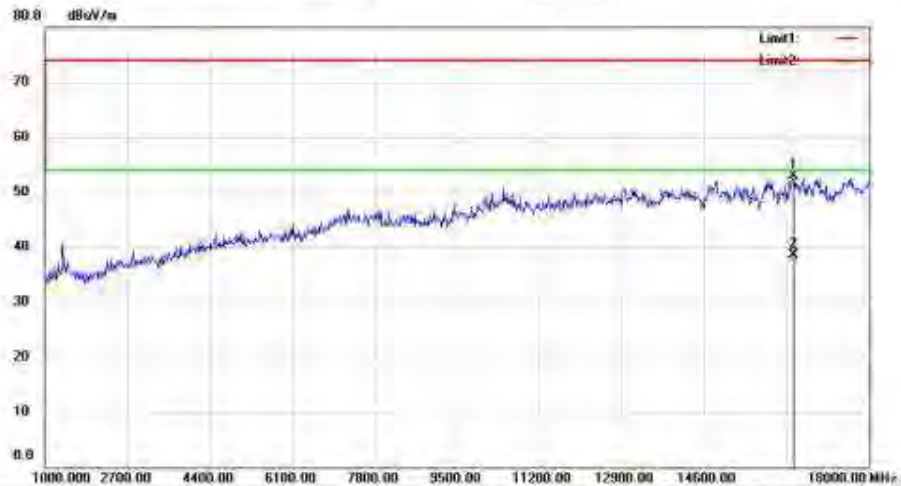

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 80M CH155 5775

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		16453.00	52.43	0.57	53.00	74.00	-21.00	peak		
2	*	16453.00	37.97	0.57	38.54	54.00	-15.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #179

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 5G

Date: #180

Date: 15/06/08

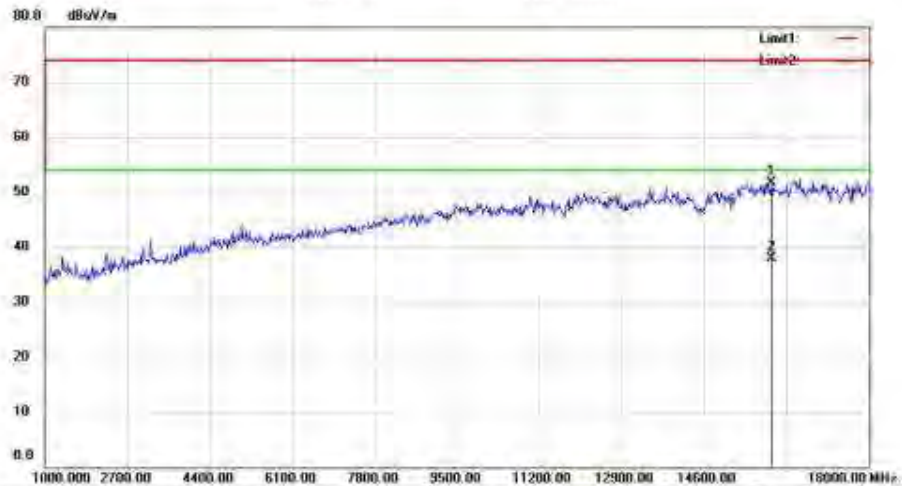

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC 80M CH155 5775

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15994.00	52.90	-1.28	51.62	74.00	-22.38	peak		
2	*	15994.00	39.23	-1.28	37.95	54.00	-16.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 5G\Data: #180

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #301

Date: 15/06/11

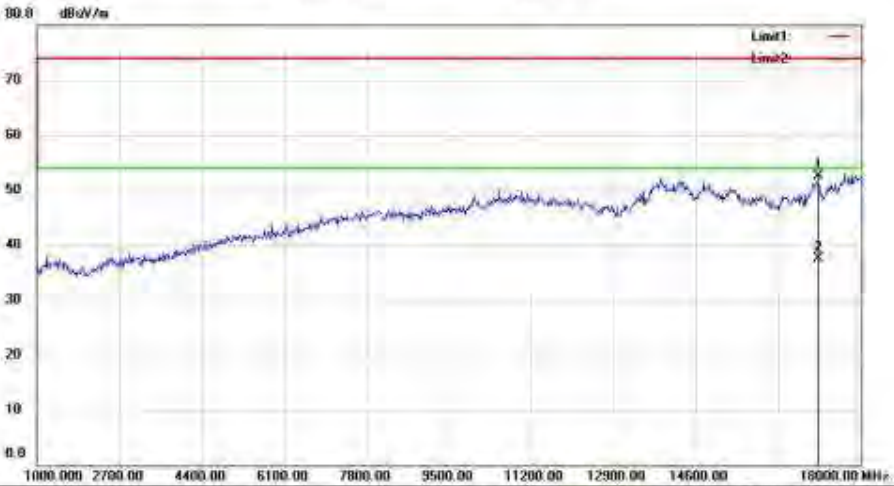

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5180 Ant1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17133.00	56.46	-3.91	52.55	74.00	-21.45	peak		
2	*	17133.00	41.33	-3.91	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #301

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Date: #302

Date: 15/06/11



Site: site #1 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5180 Ant1
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.91	-4.31	52.60	74.00	-21.40	peak		
2	*	17082.00	42.57	-4.31	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #302

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #303

Date: 15/06/11

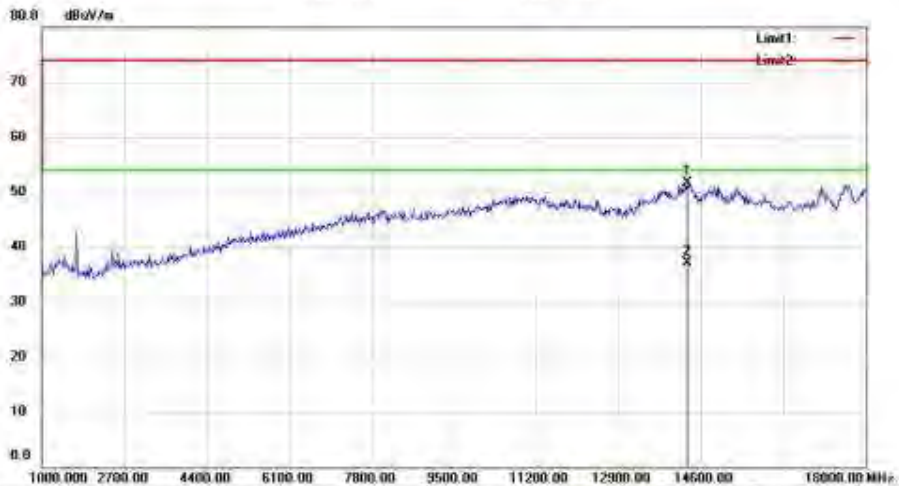

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5220 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14311.00	57.53	-5.78	51.75	74.00	-22.25	peak		
2	*	14311.00	42.94	-5.78	37.16	54.00	-16.84	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #303

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #304

Date: 15/06/11

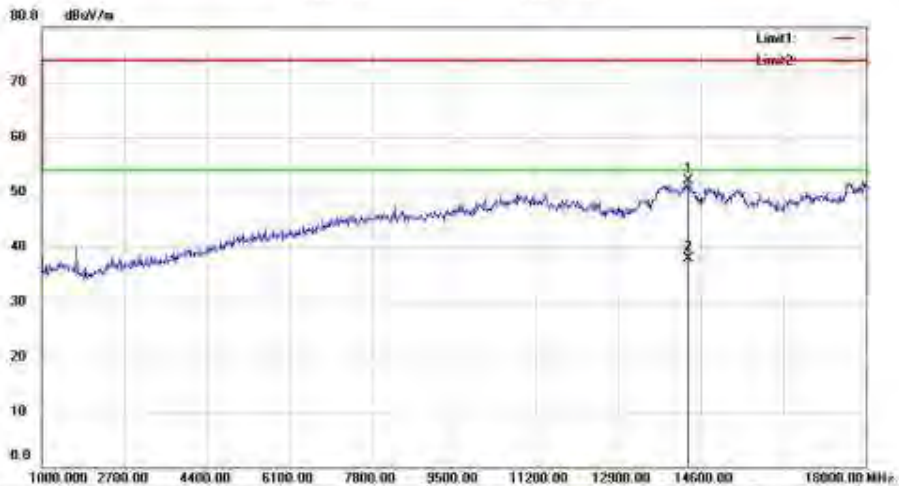

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5220 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14328.00	57.96	-5.81	52.15	74.00	-21.85	peak		
2	*	14328.00	43.67	-5.81	37.86	54.00	-16.14	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #304

Page: 1

Bldg. 86 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #305

Date: 15/06/11

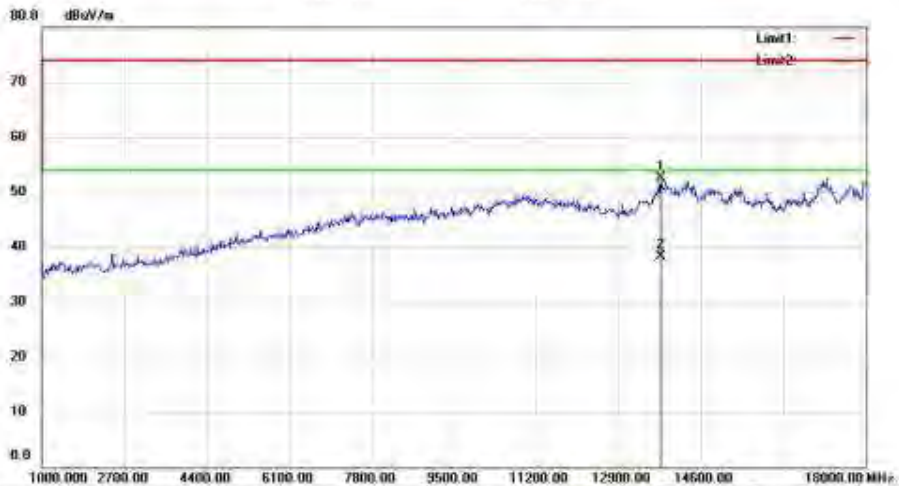

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5240 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		13767.00	58.84	-6.42	52.42	74.00	-21.58	peak		
2	*	13767.00	44.66	-6.42	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #305

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #306

Date: 15/06/11

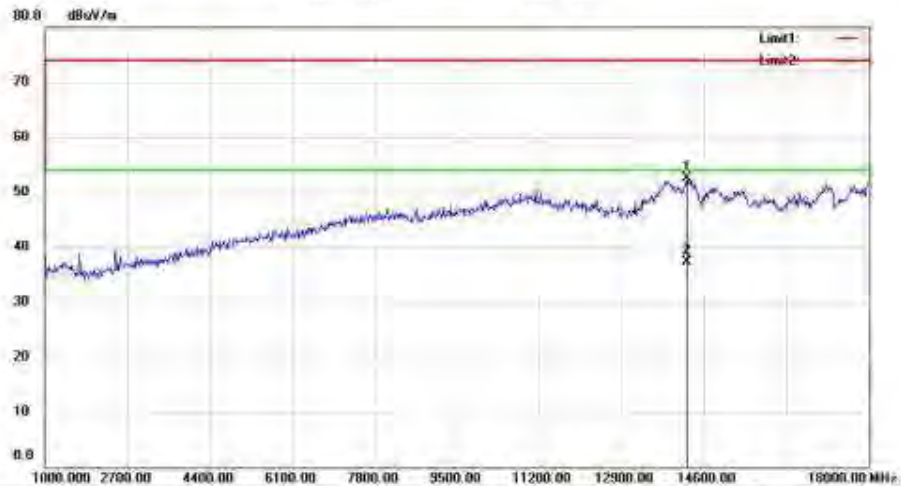

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5240 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14243.00	58.23	-5.68	52.55	74.00	-21.45	peak		
2	*	14243.00	42.94	-5.68	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #306

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #307

Date: 15/06/11

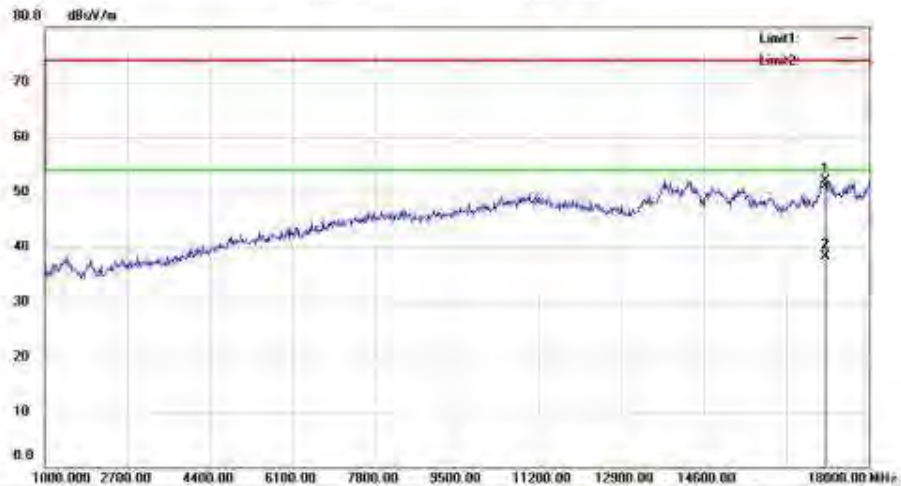

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5745 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	56.30	-4.19	52.11	74.00	-21.89	peak		
2	*	17099.00	42.44	-4.19	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #307

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Data: #308

Date: 15/06/11



Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5745 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		17133.00	56.28	-3.91	52.37	74.00	-21.63			peak	
2	*	17133.00	41.67	-3.91	37.76	54.00	-16.24			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #308

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 MajieLong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #309

Date: 15/06/11

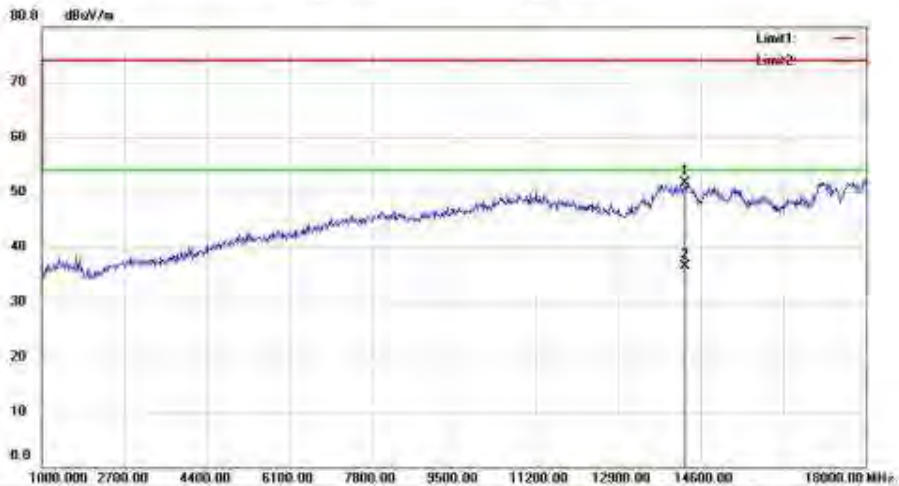

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5785 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14277.00	57.34	-5.73	51.61	74.00	-22.39	peak		
2	*	14277.00	42.32	-5.73	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #309

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #310

Date: 15/06/11

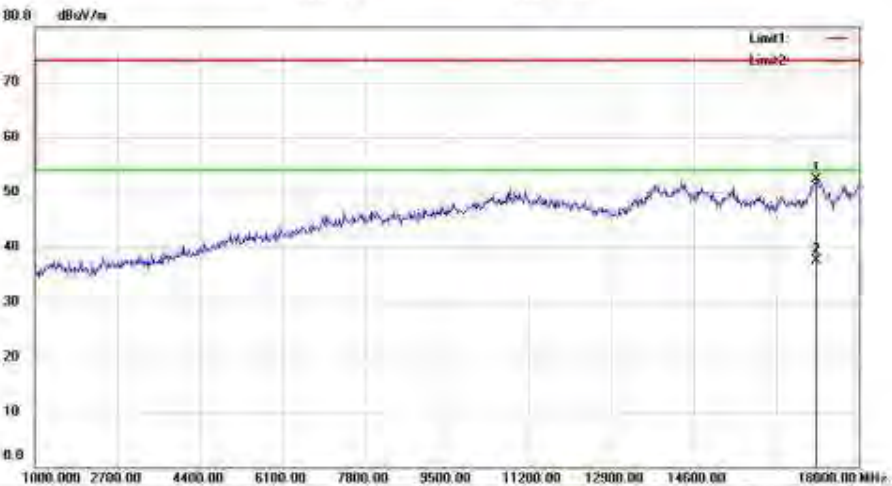

Site: site #1 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5785 Ant1
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.17	-3.91	52.26	74.00	-21.74	peak		
2	*	17133.00	41.50	-3.91	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #310

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #311

Date: 15/06/11

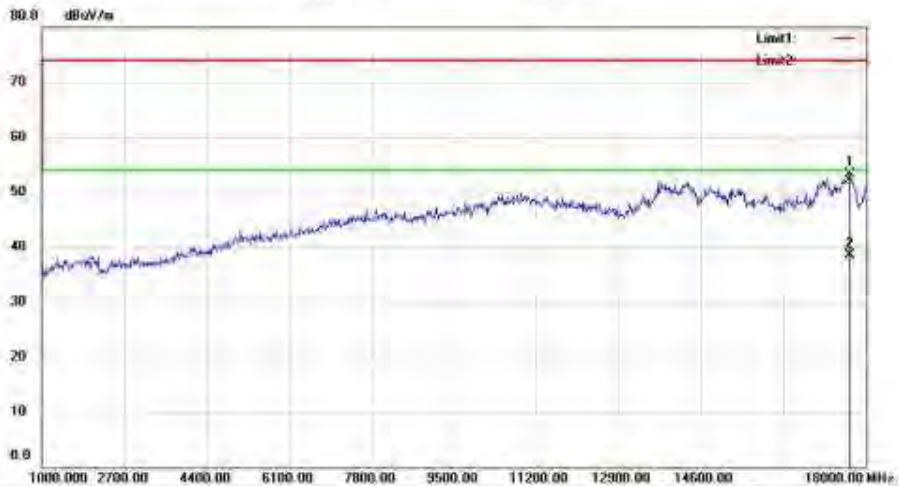

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5825 Ant1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17660.00	53.11	0.24	53.35	74.00	-20.65	peak		
2	*	17660.00	38.28	0.24	38.52	54.00	-15.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #311

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #312

Date: 15/06/11

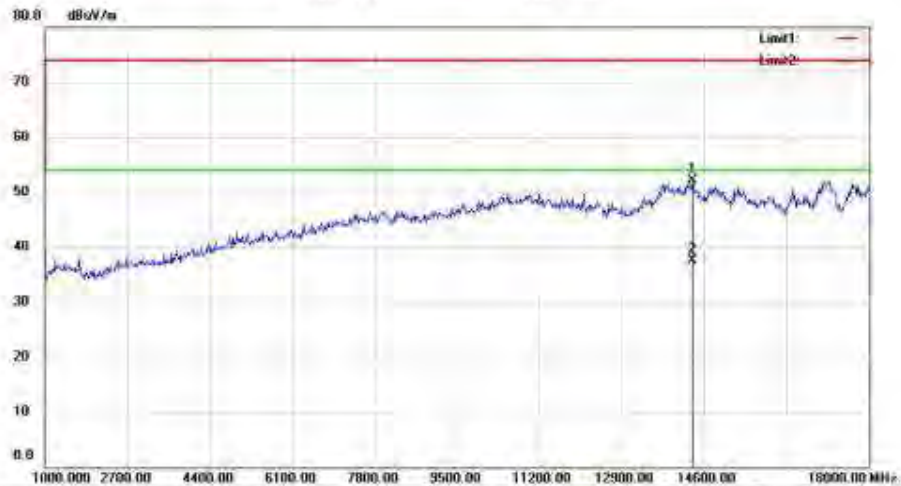

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5825 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14362.00	57.99	-5.86	52.13	74.00	-21.87	peak		
2	*	14362.00	43.45	-5.86	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #312

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #313

Date: 15/06/11

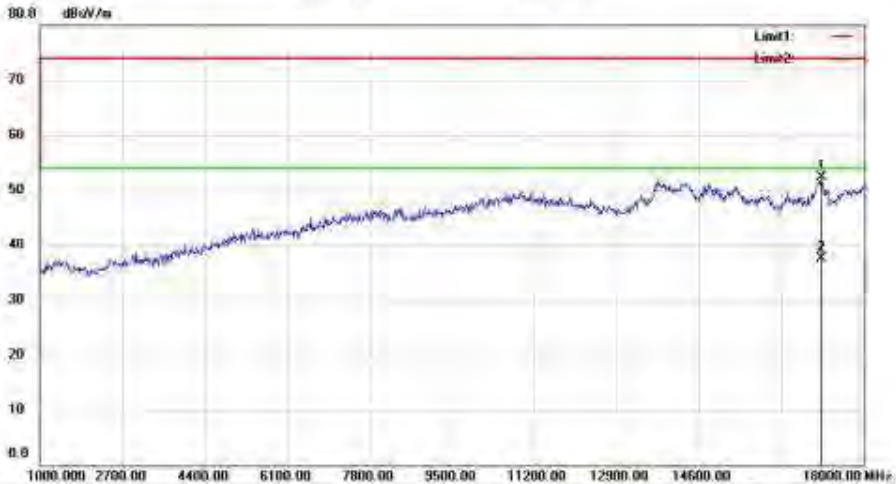

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5180 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		17116.00	56.35	-4.04	52.31	74.00	-21.69	peak		
2	*	17116.00	41.63	-4.04	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data #313

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #314

Date: 15/06/11

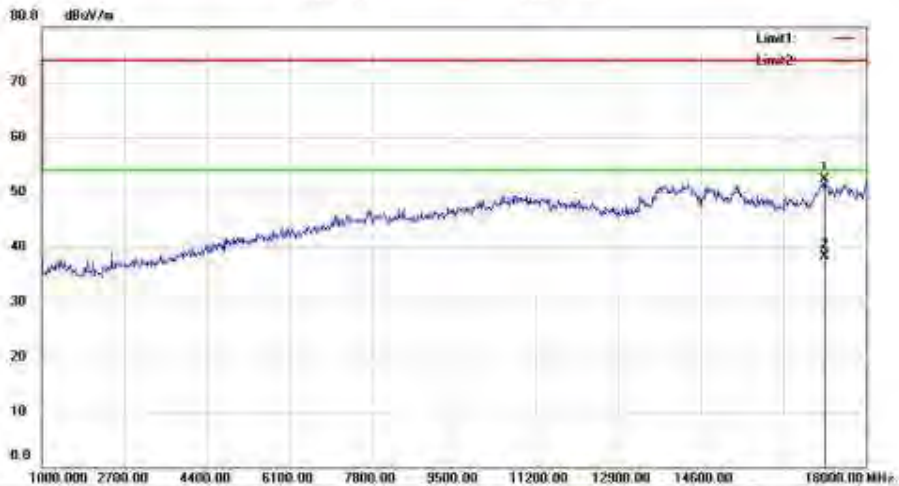

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5180 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17150.00	56.02	-3.79	52.23	74.00	-21.77	peak		
2	*	17150.00	42.05	-3.79	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #314

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Date: #315

Date: 15/06/11



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5220 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17541.00	53.08	-0.71	52.37	74.00	-21.63	peak		
2	*	17541.00	38.23	-0.71	37.52	54.00	-16.48	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #315

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #316

Date: 15/06/11

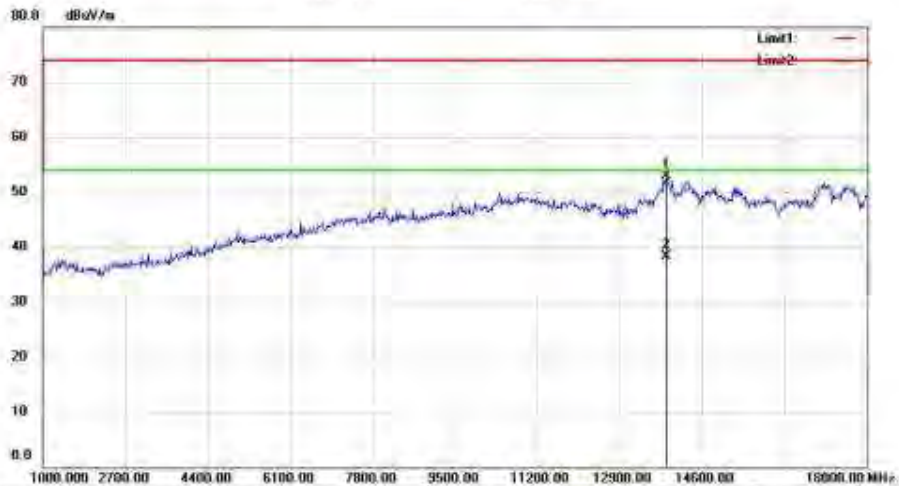

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5220 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13869.00	58.75	-5.93	52.82	74.00	-21.18	peak		
2	*	13869.00	44.19	-5.93	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data #316

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Date: #317

Date: 15/06/11



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5240 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17694.00	52.47	0.51	52.98	74.00	-21.02	peak		
2	*	17694.00	37.70	0.51	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #317

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #318

Date: 15/06/11

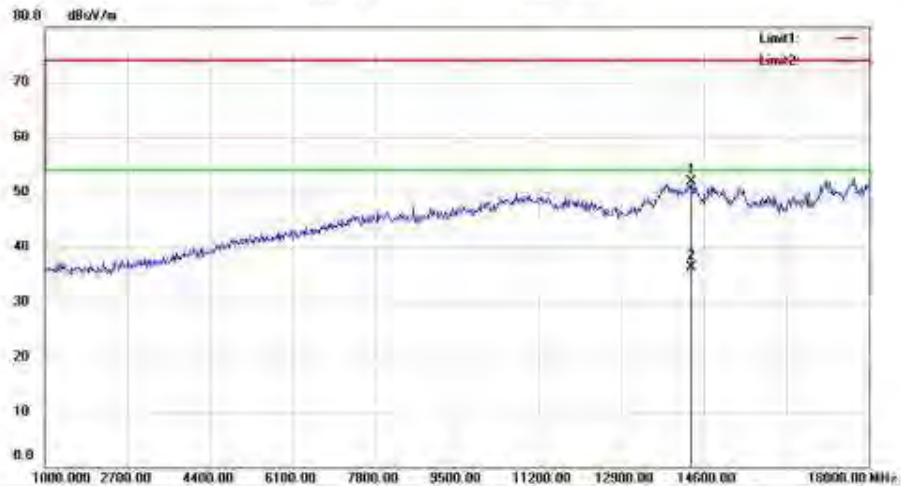

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5240 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14328.00	57.74	-5.81	51.93	74.00	-22.07	peak		
2	*	14328.00	42.10	-5.81	36.29	54.00	-17.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #318

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #319

Date: 15/06/11

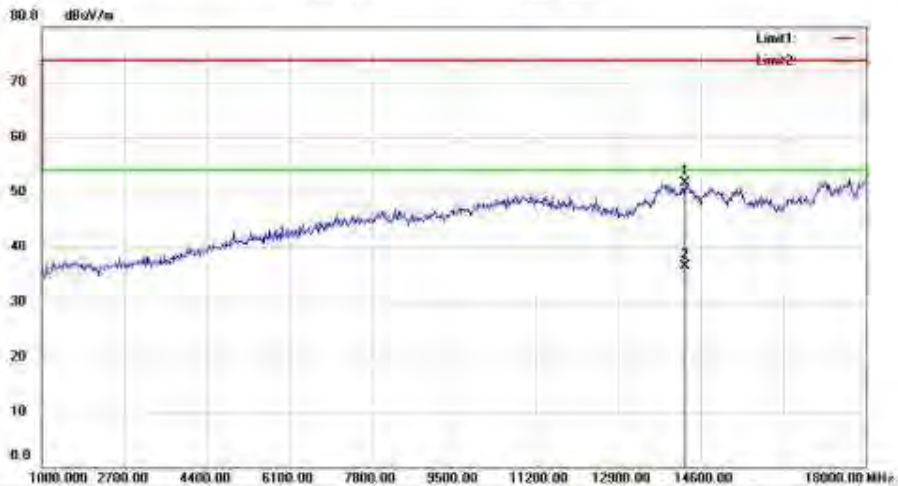

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5745 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14277.00	57.48	-5.73	51.75	74.00	-22.25	peak		
2	*	14277.00	42.32	-5.73	36.59	54.00	-17.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #319

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #320

Date: 15/06/11

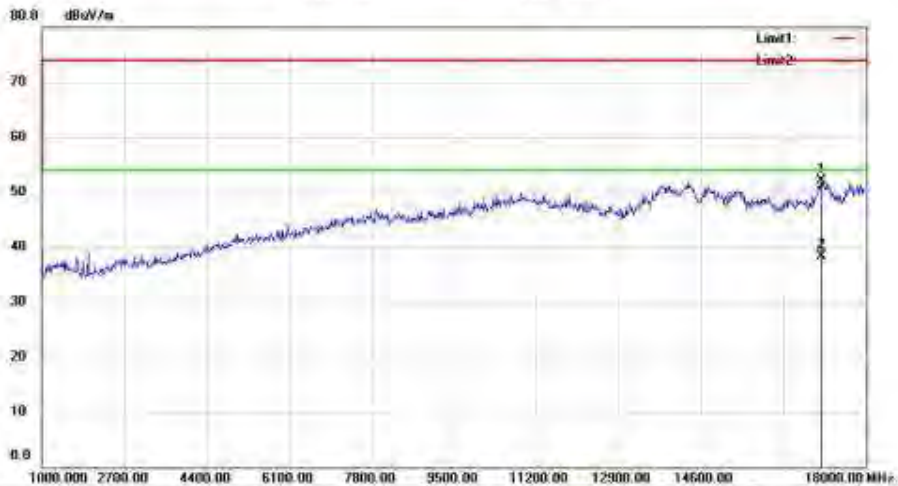

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5745 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.48	-4.31	52.17	74.00	-21.83	peak		
2	*	17082.00	42.57	-4.31	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #320

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #321

Date: 15/06/11

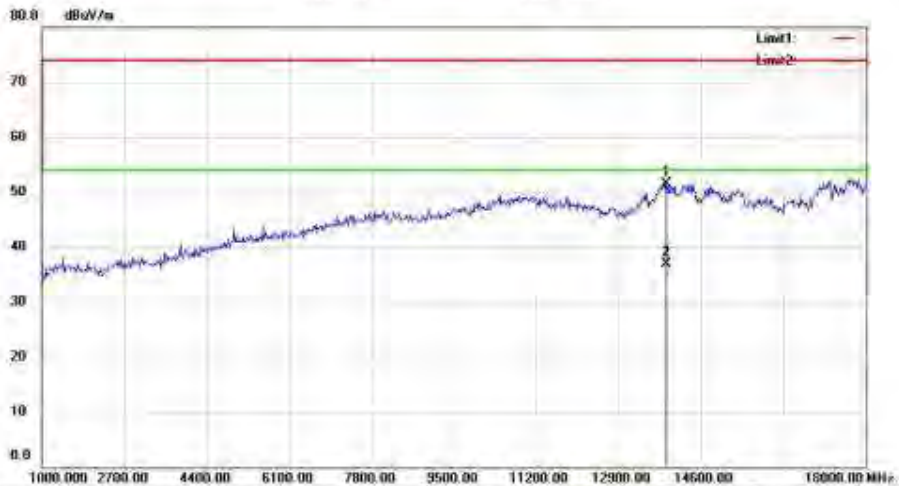

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5785 Ant2
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13886.00	57.41	-5.85	51.56	74.00	-22.44	peak		
2	*	13886.00	42.74	-5.85	36.89	54.00	-17.11	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #321

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #322

Date: 15/06/11

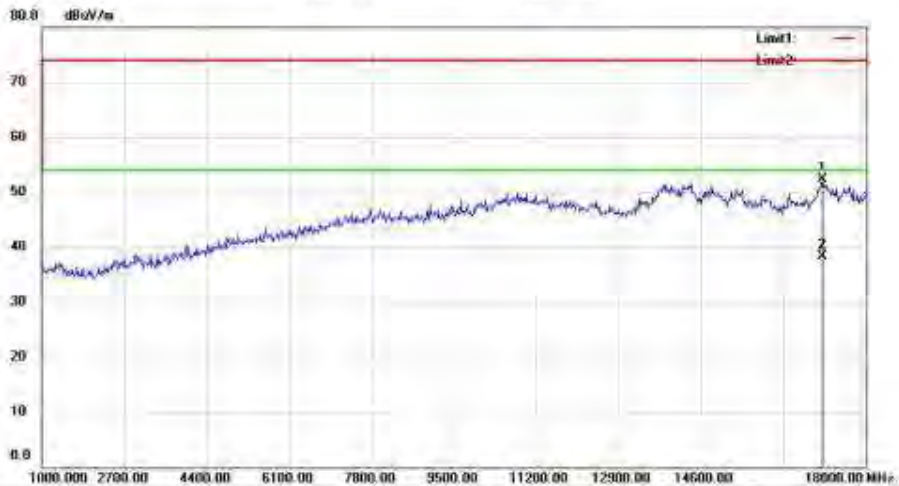

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5785 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	56.40	-4.19	52.21	74.00	-21.79	peak		
2	*	17099.00	42.45	-4.19	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #322

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #323

Date: 15/06/11

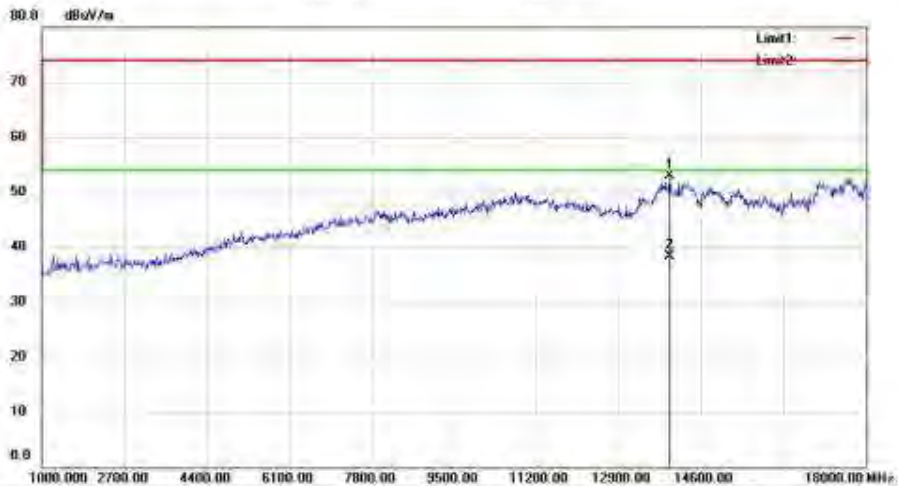

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5825 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		13954.00	58.48	-5.52	52.96	74.00	-21.04	peak		
2	*	13954.00	43.78	-5.52	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #323

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #324

Date: 15/06/11

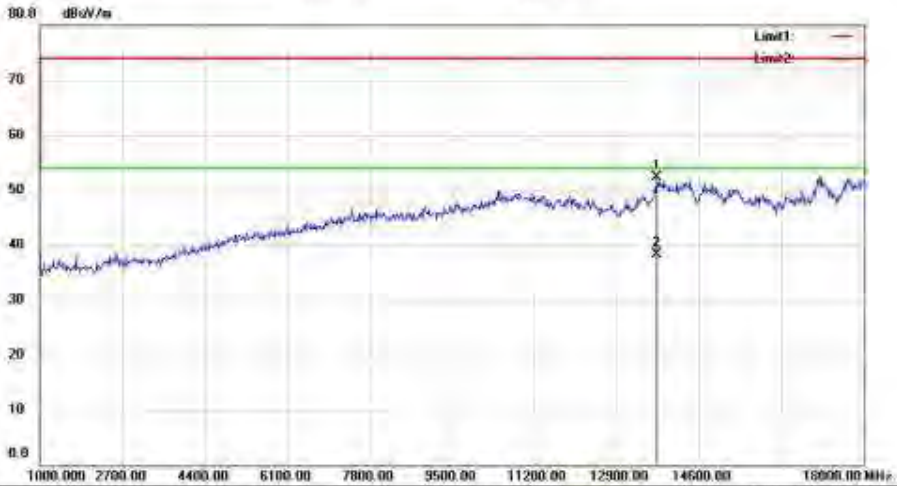

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT20 5825 Ant2
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13733.00	58.83	-6.57	52.26	74.00	-21.74	peak		
2	*	13733.00	44.83	-6.57	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #324

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Date: #325

Date: 15/06/11



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5190 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17609.00	53.38	-0.16	53.22	74.00	-20.78	peak		
2	*	17609.00	38.45	-0.16	38.29	54.00	-15.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data #325

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 88 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Data: #326

Date: 15/06/11



Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT40 5190 Ant1
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17065.00	56.62	-4.44	52.18	74.00	-21.82	peak		
2	*	17065.00	42.68	-4.44	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #326

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #327

Date: 15/06/11

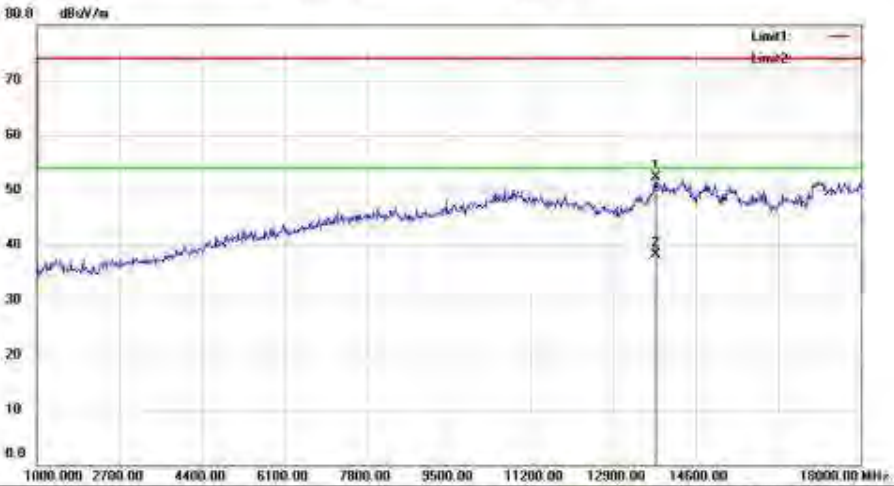

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT40 5230 Ant1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		13767.00	58.82	-6.42	52.40	74.00	-21.60	peak		
2	*	13767.00	44.68	-6.42	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #327

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Data: #328

Date: 15/06/11



Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5230 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17082.00	56.39	-4.31	52.08	74.00	-21.92	peak		
2	*	17082.00	41.60	-4.31	37.29	54.00	-16.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #328

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 86 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #329

Date: 15/06/11

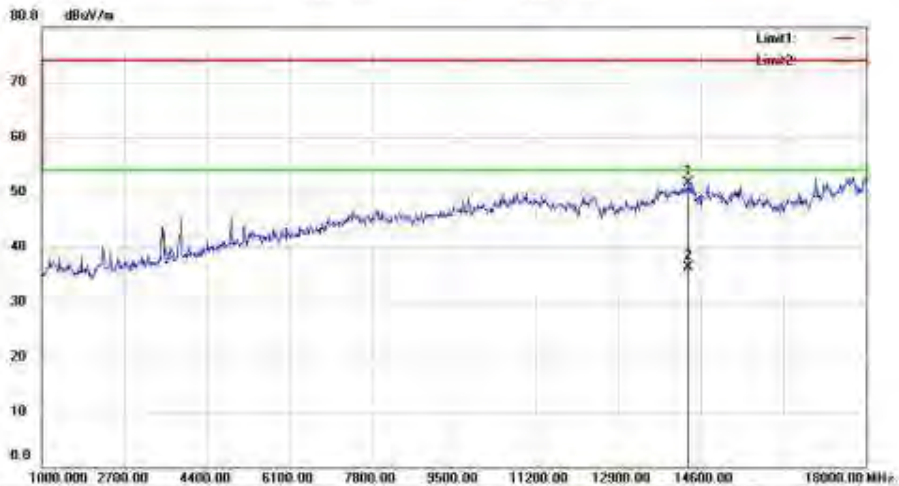

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5755 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14345.00	57.46	-5.84	51.62	74.00	-22.38	peak		
2	*	14345.00	42.08	-5.84	36.24	54.00	-17.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #329

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #330

Date: 15/06/11

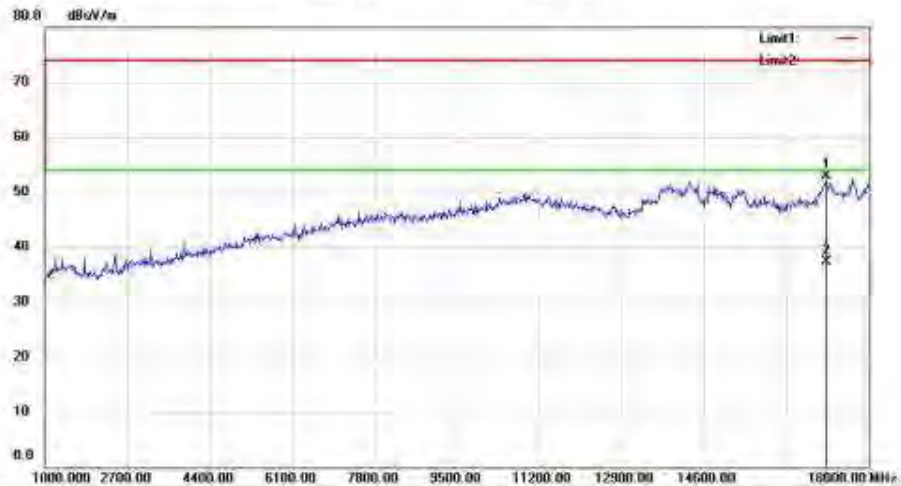

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5755 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	57.03	-4.04	52.99	74.00	-21.01	peak		
2	*	17116.00	41.32	-4.04	37.28	54.00	-16.72	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #330

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 86, Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #331

Date: 15/06/11

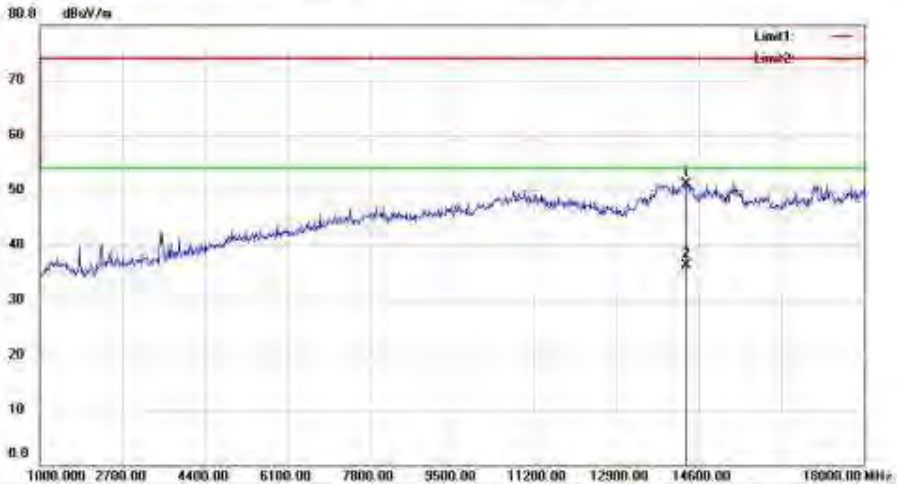

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5795 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14328.00	56.96	-5.81	51.15	74.00	-22.85	peak		
2	*	14328.00	42.02	-5.81	36.21	54.00	-17.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #331

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #332

Date: 15/06/11

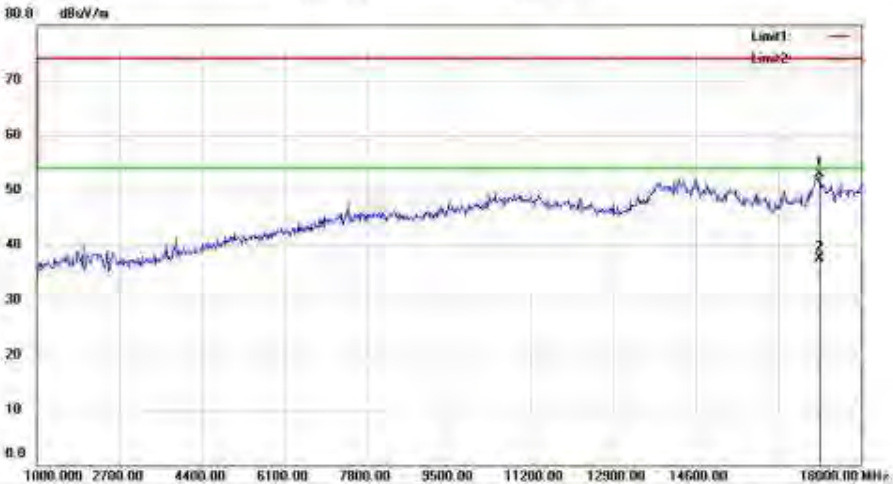

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT20 5795 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17150.00	56.62	-3.79	52.83	74.00	-21.17	peak		
2	*	17150.00	41.33	-3.79	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #332

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Date: #333

Date: 15/06/11



Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT40 5190 Ant2
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17507.00	53.90	-0.96	52.94	74.00	-21.06	peak		
2	*	17507.00	39.22	-0.96	38.26	54.00	-15.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data #333

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #334

Date: 15/06/11

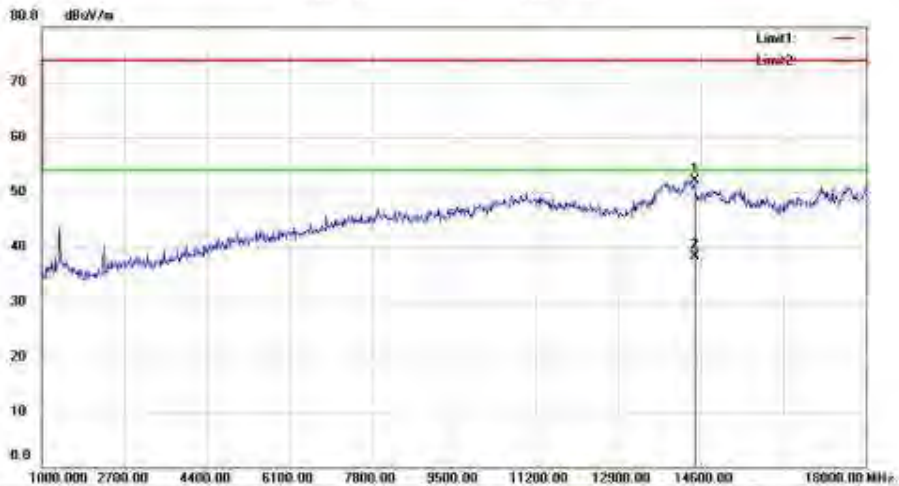

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5190 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		1446.00	58.18	-6.02	52.16	74.00	-21.84	peak		
2	*	1446.00	44.27	-6.02	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data #334

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #335

Date: 15/06/11

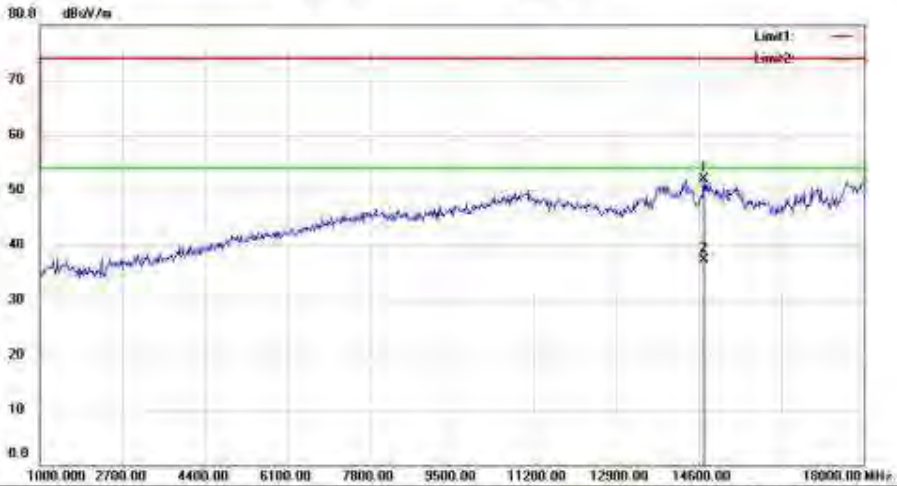

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11N HT40 5230 Ant2
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14702.00	58.21	-6.39	51.82	74.00	-22.18	peak		
2	*	14702.00	43.65	-6.39	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #335

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #336

Date: 15/06/11

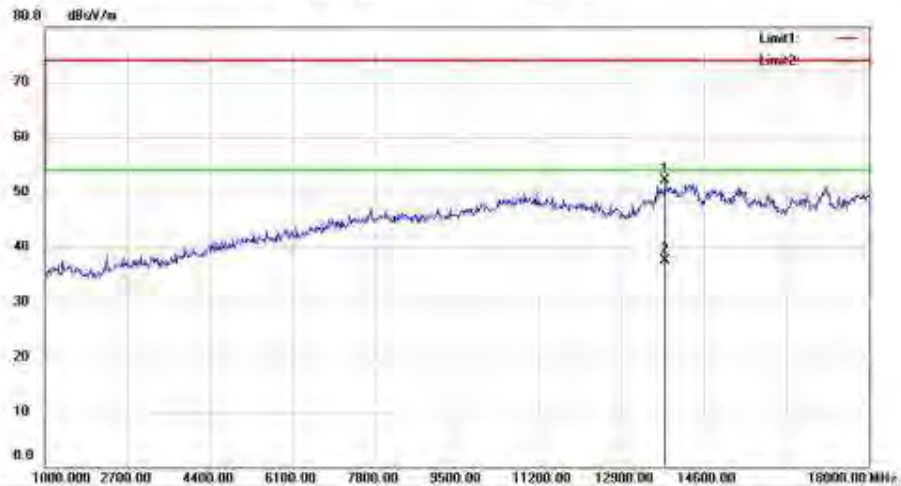

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5230 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13801.00	58.31	-6.26	52.05	74.00	-21.95	peak		
2	*	13801.00	43.85	-6.26	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #336

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #337

Date: 15/06/11

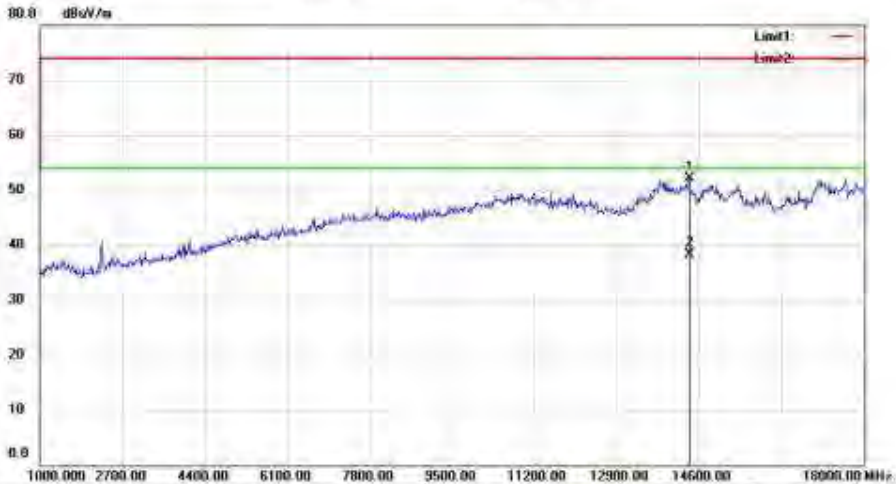

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5755 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14396.00	58.09	-5.92	52.17	74.00	-21.83	peak		
2	*	14396.00	44.17	-5.92	38.25	54.00	-15.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #337

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #338

Date: 15/06/11

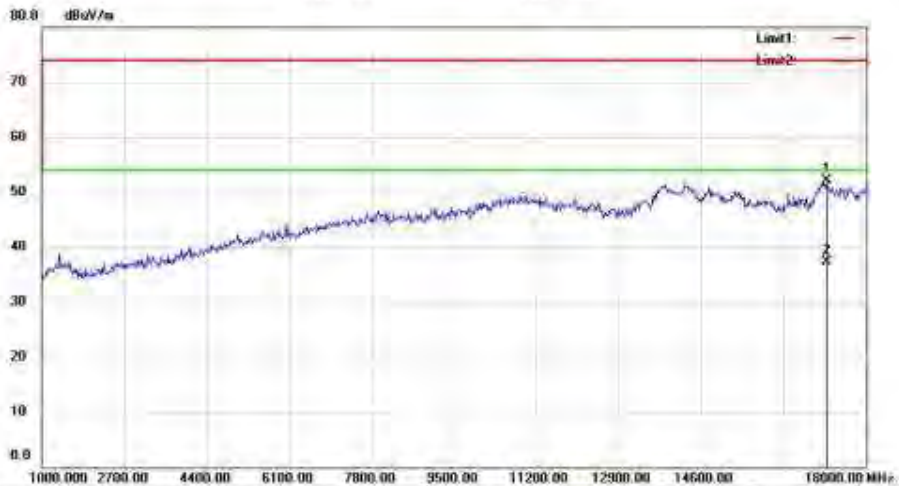

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5755 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17184.00	55.59	-3.51	52.08	74.00	-21.92	peak		
2	*	17184.00	40.72	-3.51	37.21	54.00	-16.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #338

Page: 1

Bldg. 86 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV 2

Date: #339

Date: 15/06/11



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5795 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17116.00	56.01	-4.04	51.97	74.00	-22.03	peak		
2	*	17116.00	41.17	-4.04	37.13	54.00	-16.87	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data #339

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Data: #340

Date: 15/06/11

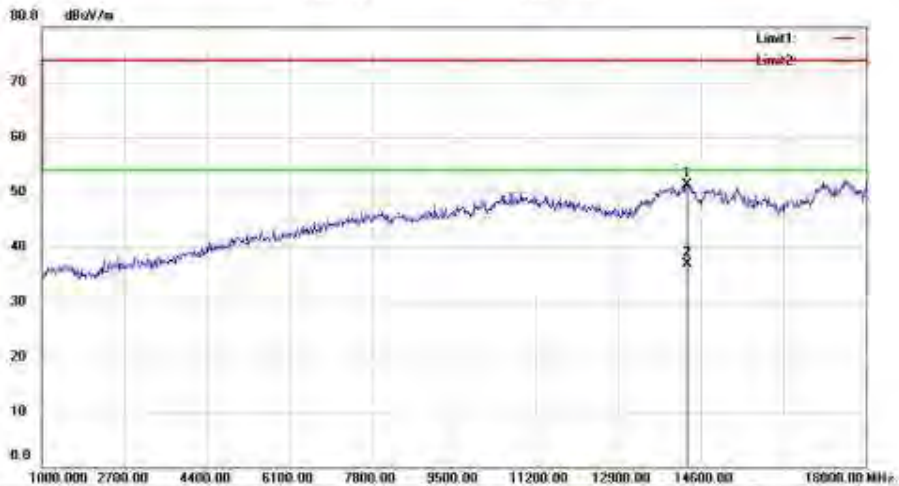

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11N HT40 5795 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14311.00	57.17	-5.78	51.39	74.00	-22.61	peak		
2	*	14311.00	42.63	-5.78	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #340

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262



Radiated Emission Measurement

File: TUV2

Data: #341

Date: 15/06/11



Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5180 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17082.00	56.00	-4.31	51.69	74.00	-22.31	peak		
2	*	17082.00	41.16	-4.31	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #341

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecheng Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #342

Date: 15/06/11

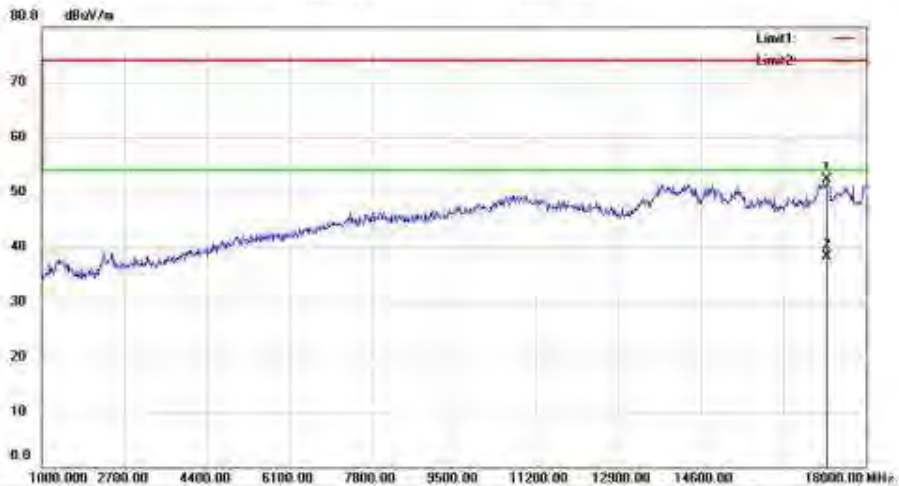

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5180 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17201.00	55.68	-3.37	52.31	74.00	-21.69	peak		
2	*	17201.00	41.58	-3.37	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #342

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #343

Date: 15/06/11

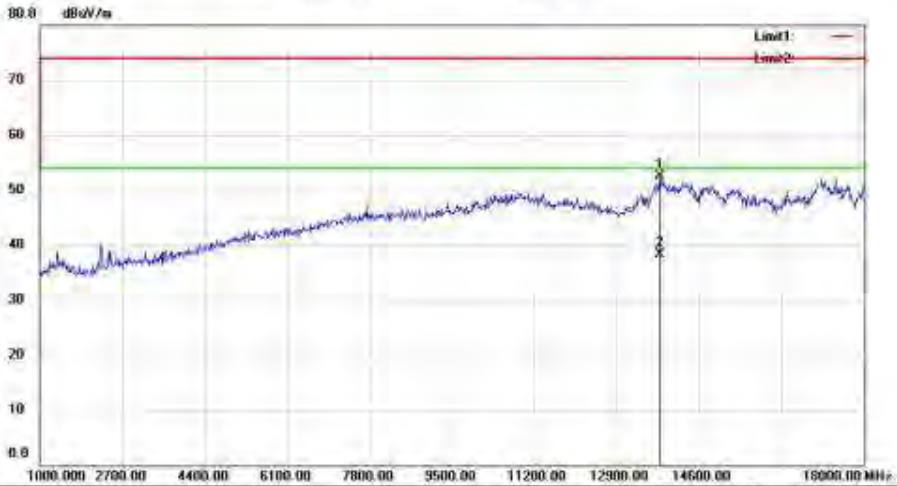

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5220 Ant1
Note:
Polarization: **Horizontal**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13784.00	58.84	-6.34	52.50	74.00	-21.50	peak		
2	*	13784.00	44.55	-6.34	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #343

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #344

Date: 15/06/11

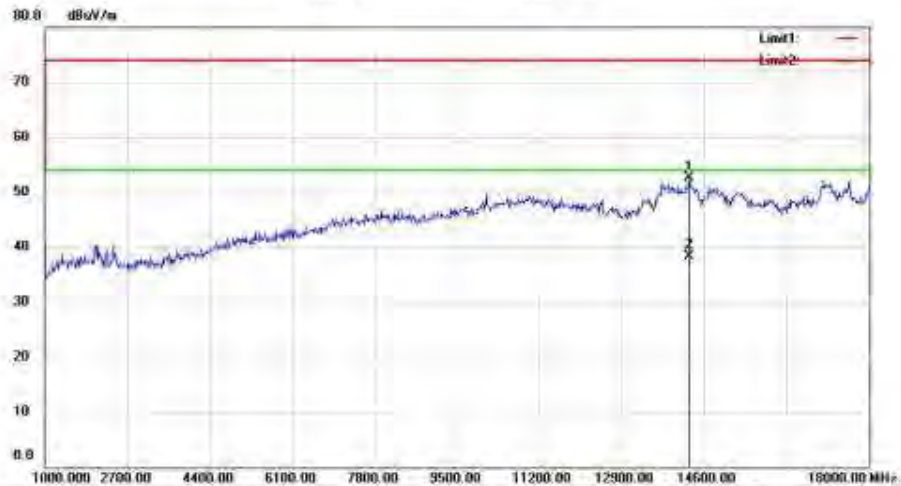

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5220 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14294.00	58.23	-5.76	52.47	74.00	-21.53	peak		
2	*	14294.00	44.00	-5.76	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #344

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #345

Date: 15/06/11

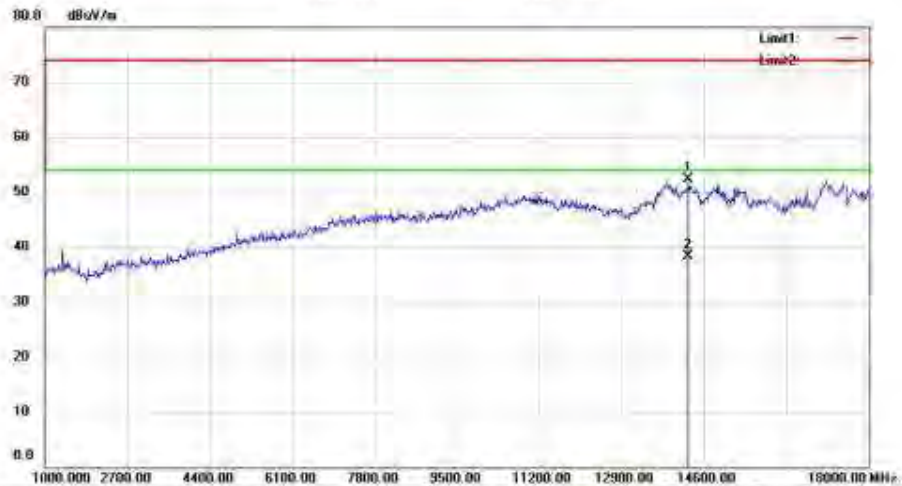

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5240 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14277.00	58.05	-5.73	52.32	74.00	-21.68	peak		
2	*	14277.00	43.94	-5.73	38.21	54.00	-15.79	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #345

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #346

Date: 15/06/11

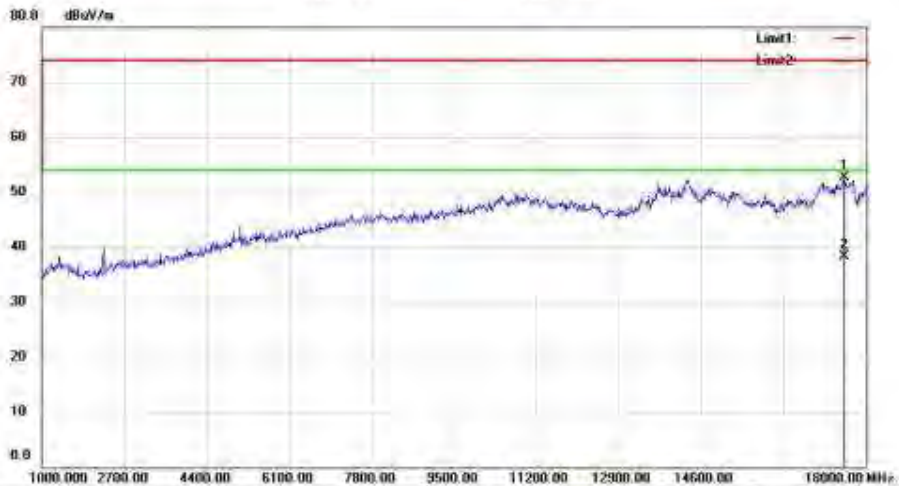

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5240 Ant1
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	dBuV	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
							Detector		Comment
1		17558.00	53.32	-0.56	52.76	74.00	-21.24	peak	
2	*	17558.00	38.80	-0.56	38.24	54.00	-15.76	AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #346

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #347

Date: 15/06/11

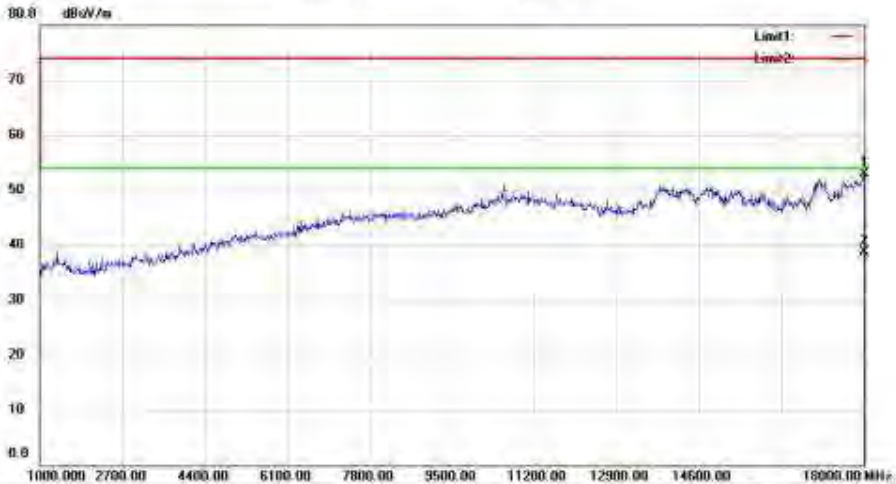

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5745 Ant1

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	49.91	2.92	52.83	74.00	-21.17	peak		
2	*	18000.00	35.70	2.92	38.62	54.00	-15.38	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #347

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #348

Date: 15/06/11

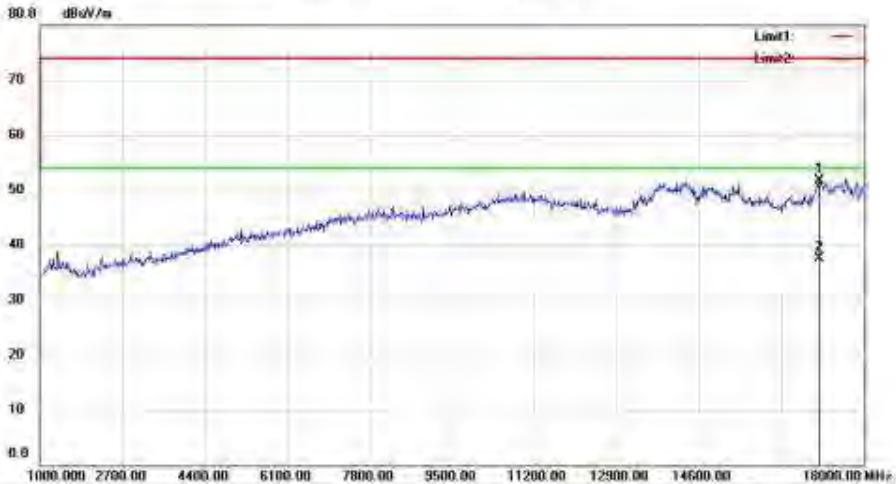

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5745 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17082.00	56.06	-4.31	51.75	74.00	-22.25	peak		
2	*	17082.00	41.82	-4.31	37.51	54.00	-16.49	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data #348

Page: 1

Bldg. 88 Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #349

Date: 15/06/11

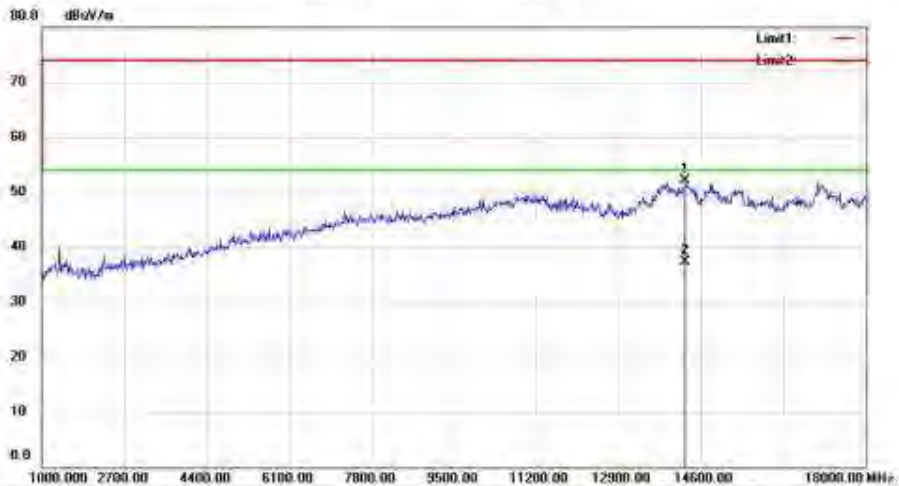

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5785 Ant1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14277.00	57.78	-5.73	52.05	74.00	-21.95	peak		
2	*	14277.00	42.99	-5.73	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #349

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #350

Date: 15/06/11

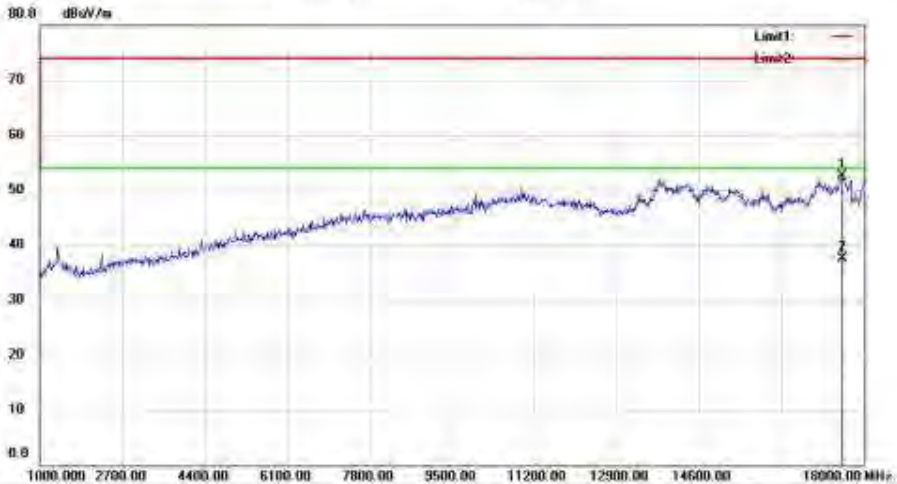

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5785 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		17558.00	53.08	-0.56	52.52	74.00	-21.48	peak		
2	*	17558.00	38.10	-0.56	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #350

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #351

Date: 15/06/11

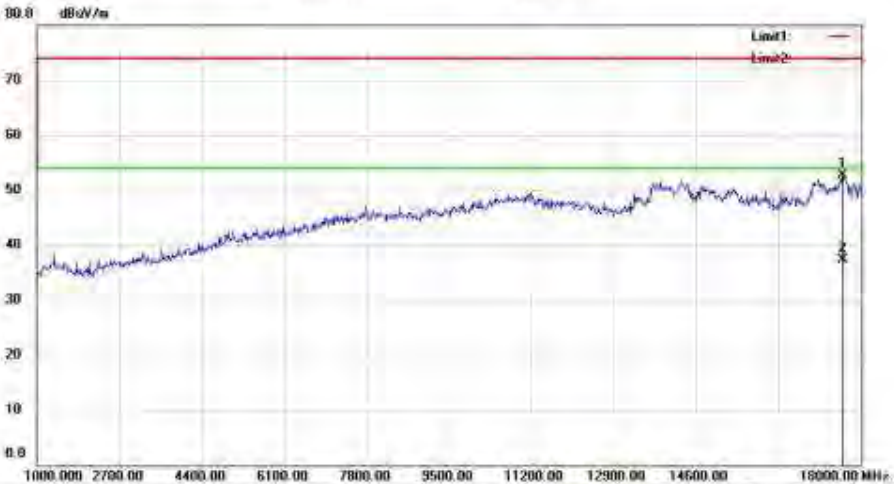

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5825 Ant1
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	dBuV	Factor	ment			Height	Delta
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		17626.00	52.83	-0.03	52.80	74.00	-21.20	peak	
2	*	17626.00	37.27	-0.03	37.24	54.00	-16.76	AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #351

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #352

Date: 15/06/11

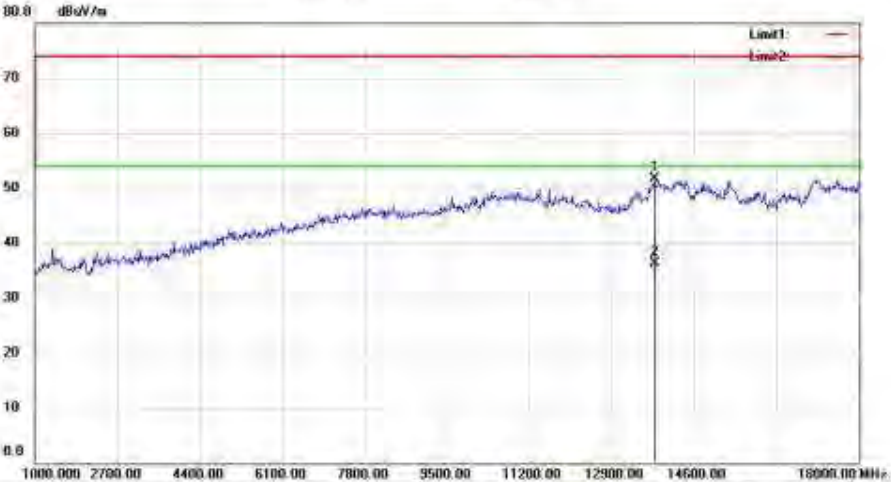

Site: site #1
Limit: (RE) FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5825 Ant1
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13784.00	57.95	-6.34	51.61	74.00	-22.39	peak		
2	*	13784.00	42.63	-6.34	36.29	54.00	-17.71	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #352

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #353

Date: 15/06/11

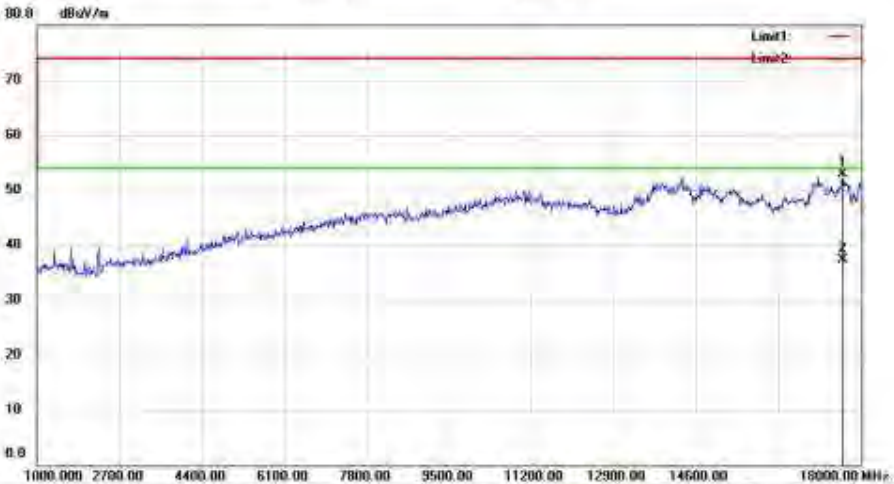

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5180 Ant2
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17626.00	52.89	-0.03	52.86	74.00	-21.14	peak		
2	*	17626.00	37.28	-0.03	37.25	54.00	-16.75	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #353

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #354

Date: 15/06/11

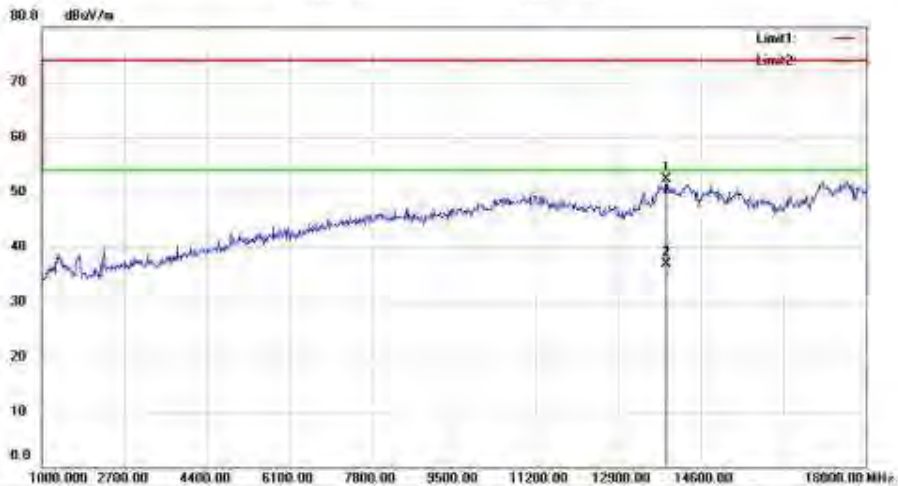

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5180 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13886.00	58.14	-5.85	52.29	74.00	-21.71	peak		
2	*	13886.00	42.67	-5.85	36.82	54.00	-17.18	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #354

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #355

Date: 15/06/11

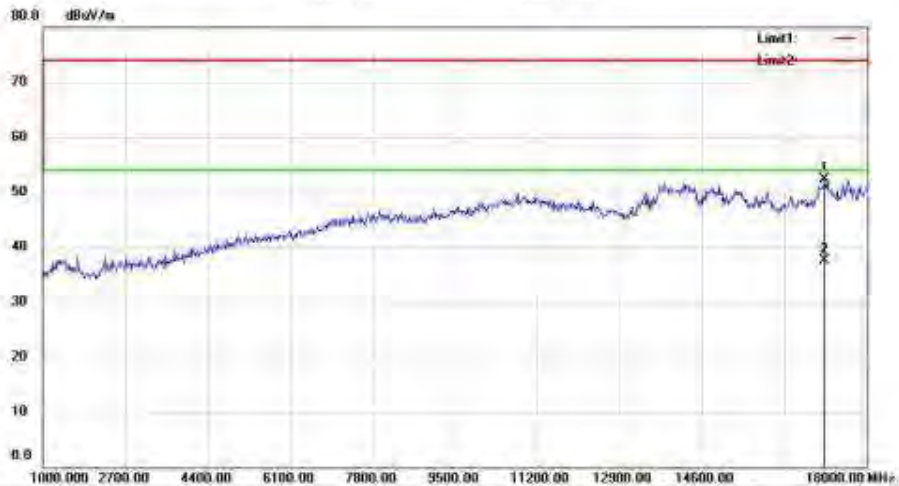

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5220 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17133.00	56.20	-3.91	52.29	74.00	-21.71	peak		
2	*	17133.00	41.33	-3.91	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #355

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #356

Date: 15/06/11

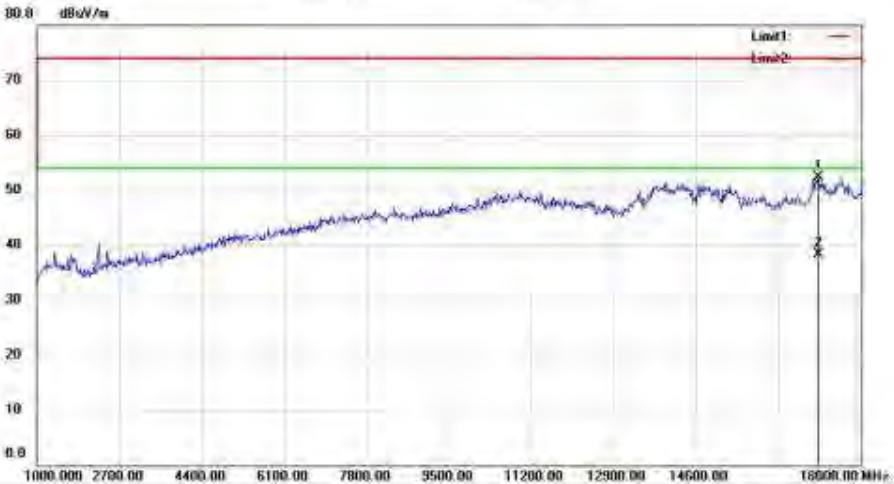

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5220 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		17116.00	56.29	-4.04	52.25	74.00	-21.75	peak		
2	*	17116.00	42.28	-4.04	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #356

Page: 1

Bldg. 86 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #357

Date: 15/06/11

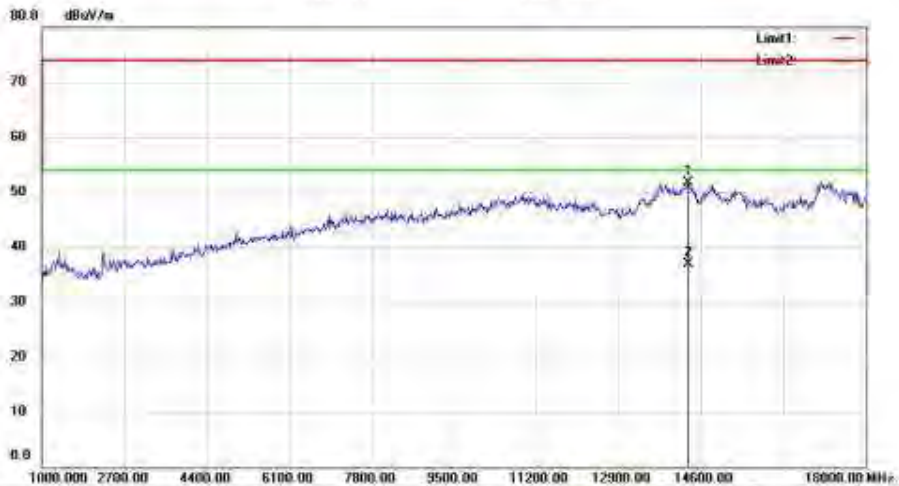

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5240 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14328.00	57.44	-5.81	51.63	74.00	-22.37	peak		
2	*	14328.00	42.76	-5.81	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #357

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg 06 Majiecong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #358

Date: 15/06/11

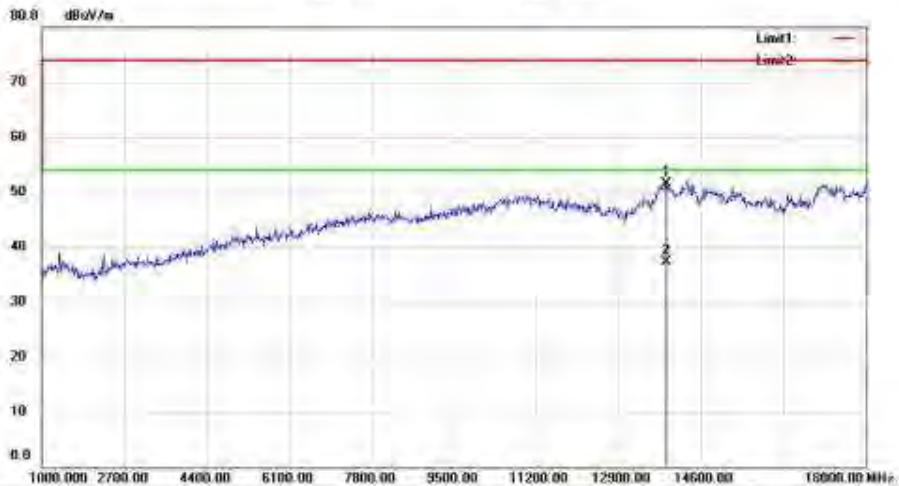

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5240 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13886.00	57.27	-5.85	51.42	74.00	-22.58	peak		
2	*	13886.00	43.09	-5.85	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #358

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 66 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #359

Date: 15/06/11

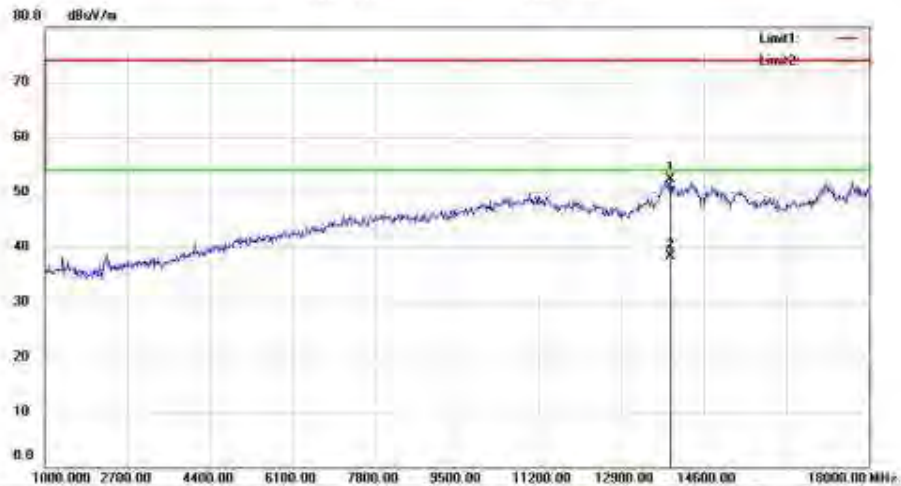

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5745 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13903.00	58.08	-5.76	52.32	74.00	-21.68	peak		
2	*	13903.00	44.00	-5.76	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #359

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 86 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #360

Date: 15/06/11

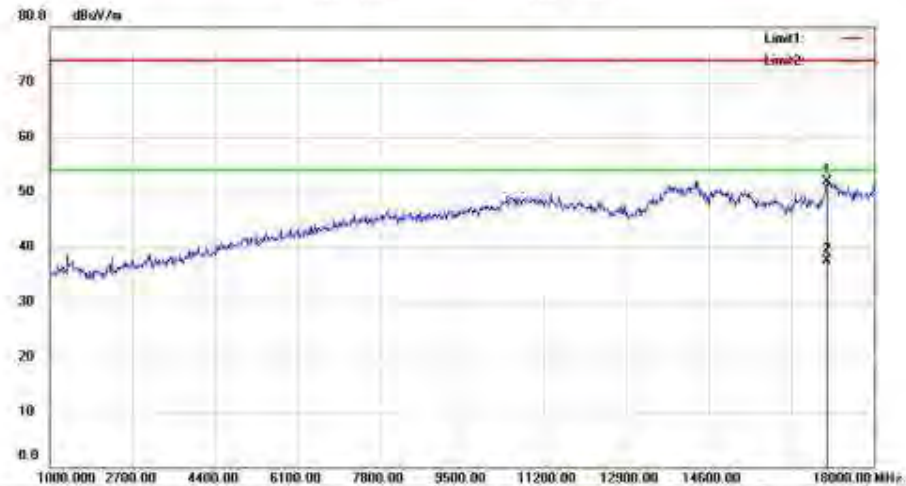

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5745 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17031.00	56.54	-4.71	51.83	74.00	-22.17	peak		
2	*	17031.00	42.12	-4.71	37.41	54.00	-16.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #360

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #361

Date: 15/06/11

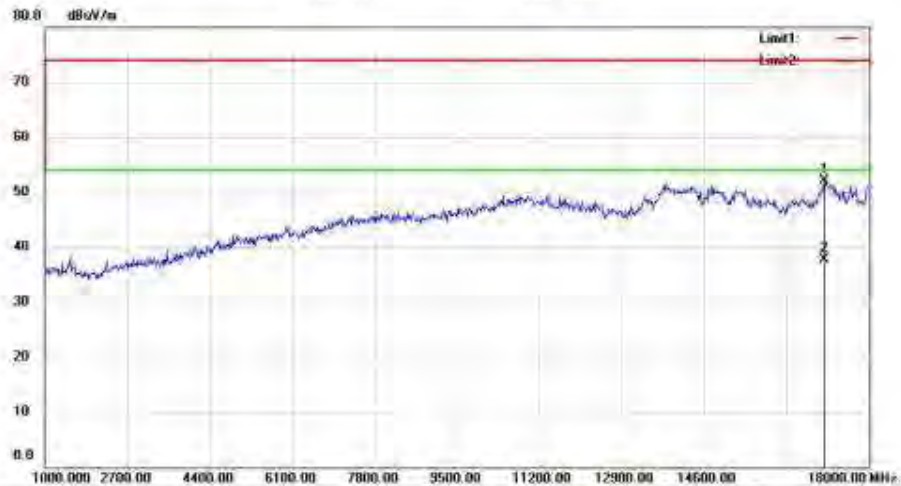

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5785 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17082.00	56.39	-4.31	52.08	74.00	-21.92	peak		
2	*	17082.00	41.95	-4.31	37.64	54.00	-16.36	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #361

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #362

Date: 15/06/11

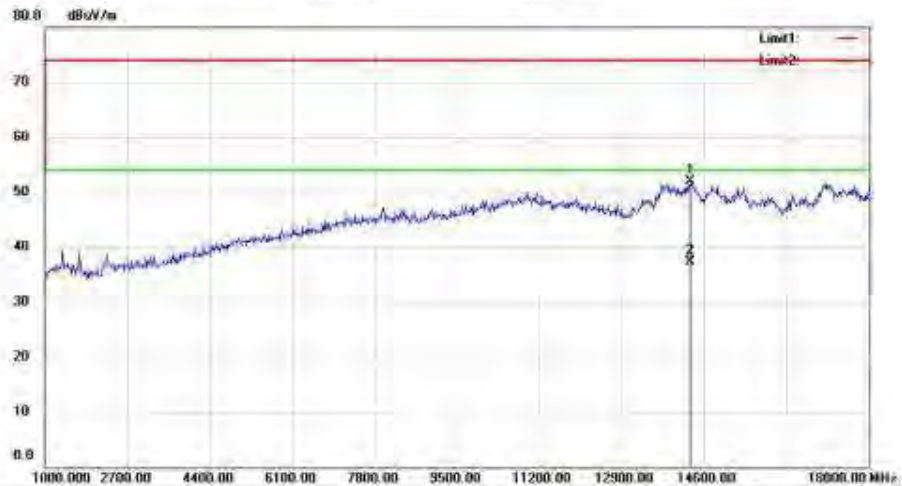

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT20 5785 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV		dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14311.00	57.62	-5.78	51.84	74.00	-22.16	peak		
2	*	14311.00	43.04	-5.78	37.26	54.00	-16.74	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #362

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #363

Date: 15/06/11

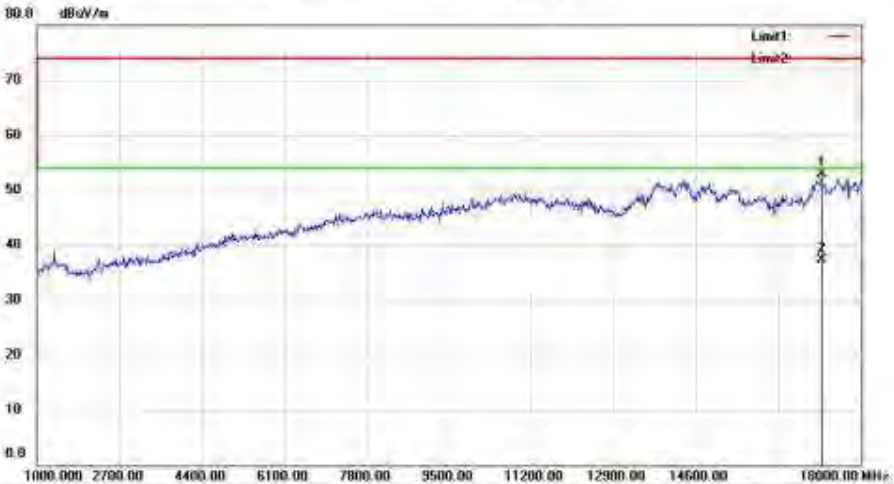

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5825 Ant2
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17184.00	56.40	-3.51	52.89	74.00	-21.11	peak		
2	*	17184.00	40.78	-3.51	37.27	54.00	-16.73	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #363

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #364

Date: 15/06/11

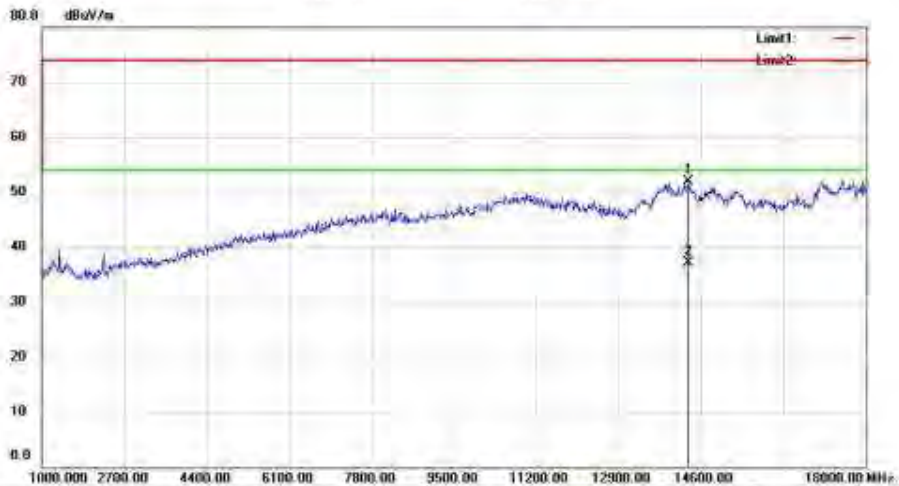

Site: site #1 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT20 5825 Ant2
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14345.00	57.75	-5.84	51.91	74.00	-22.09	peak		
2	*	14345.00	42.99	-5.84	37.15	54.00	-16.85	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #364

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #365

Date: 15/06/11

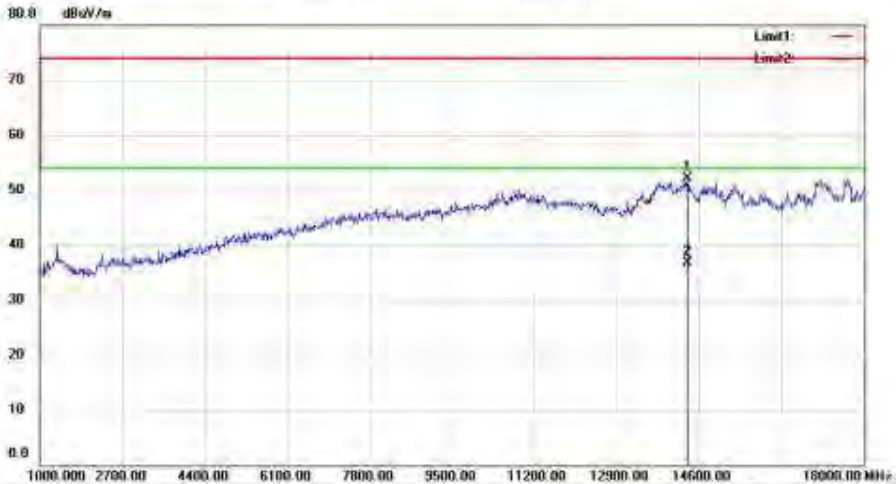

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5190 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14362.00	57.88	-5.86	52.02	74.00	-21.98	peak		
2	*	14362.00	42.65	-5.86	36.79	54.00	-17.21	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #365

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #366

Date: 15/06/11

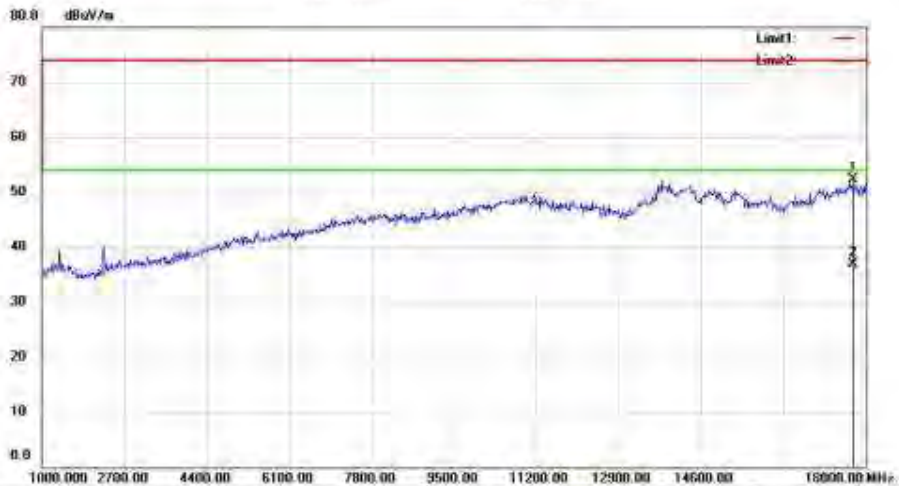

Site: site #1

Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5190 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17728.00	51.43	0.78	52.21	74.00	-21.79	peak		
2	*	17728.00	36.17	0.78	36.95	54.00	-17.05	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #366

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #367

Date: 15/06/11

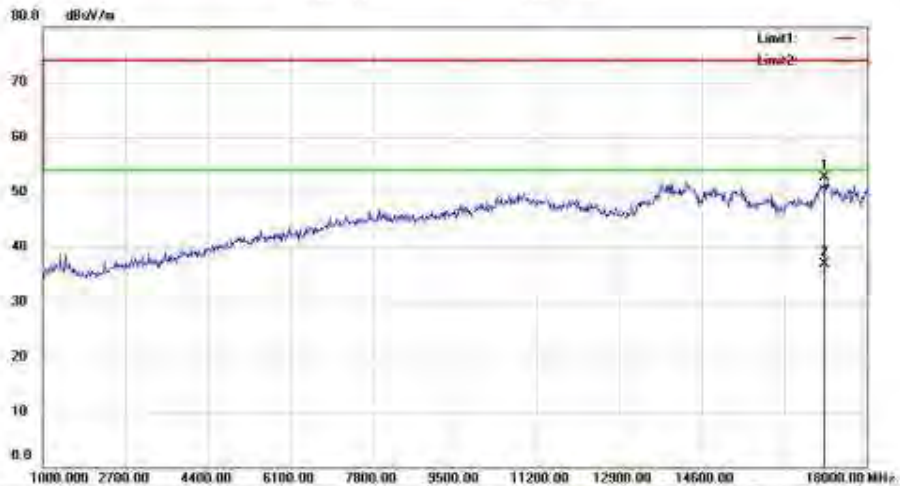

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5230 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17133.00	56.58	-3.91	52.67	74.00	-21.33	peak		
2	*	17133.00	40.76	-3.91	36.85	54.00	-17.15	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #367

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #368

Date: 15/06/11

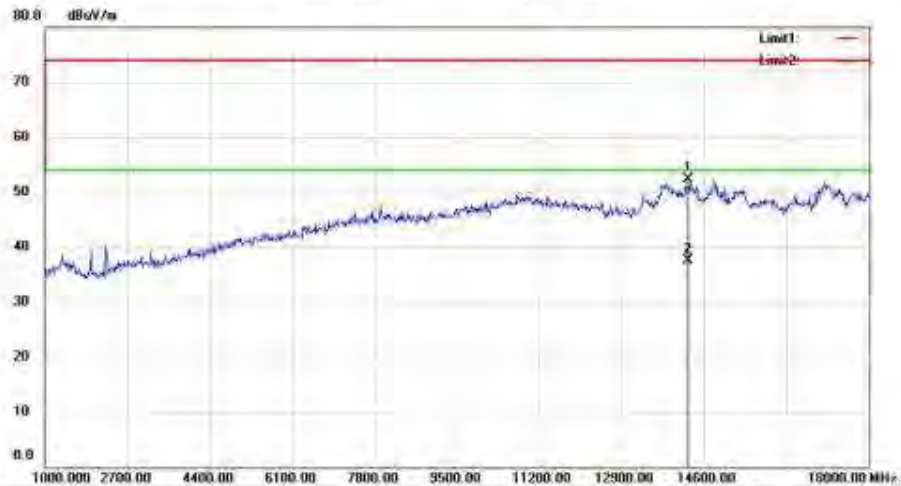

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5230 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14277.00	58.07	-5.73	52.34	74.00	-21.66	peak		
2	*	14277.00	43.26	-5.73	37.53	54.00	-16.47	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #368

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #369

Date: 15/06/11

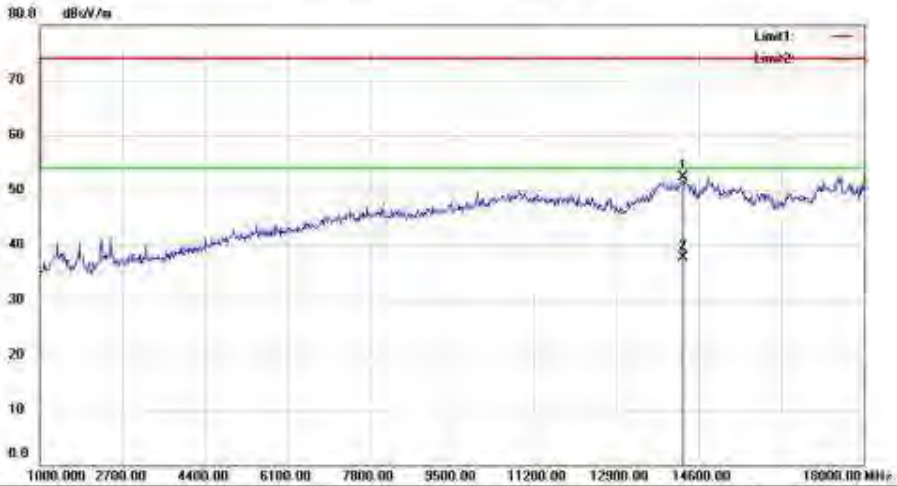

Site: site #1 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT40 5755 Ant1
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14277.00	57.99	-5.73	52.26	74.00	-21.74	peak		
2	*	14277.00	43.44	-5.73	37.71	54.00	-16.29	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #369

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 06 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #370

Date: 15/06/11

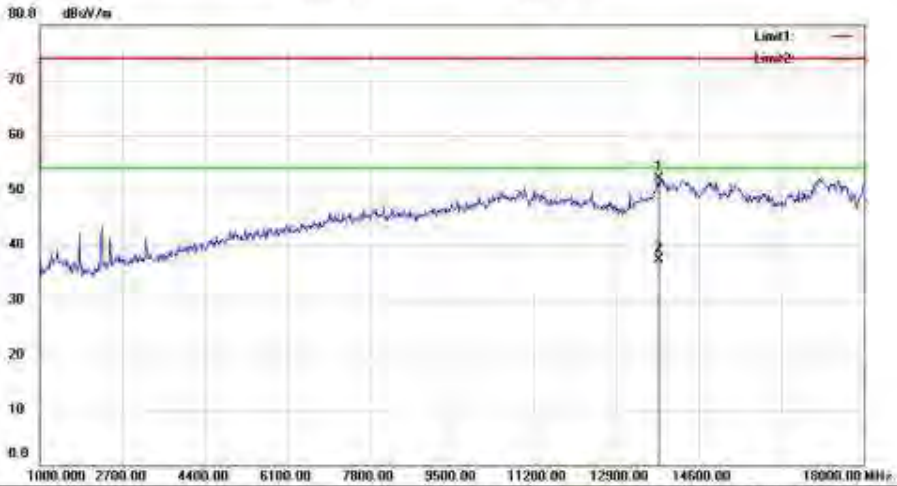

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5755 Ant1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		13767.00	58.47	-6.42	52.05	74.00	-21.95	peak		
2	*	13767.00	43.66	-6.42	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #370

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #371

Date: 15/06/11

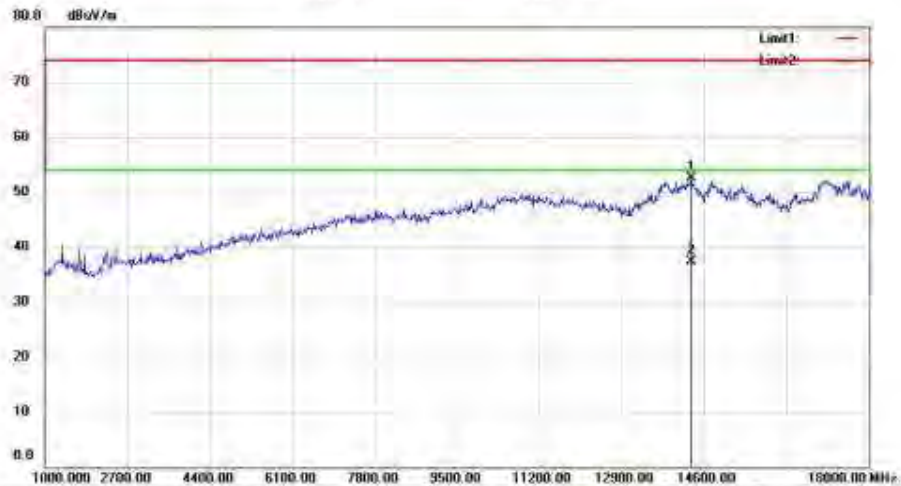

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5795 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14328.00	58.25	-5.81	52.44	74.00	-21.56	peak		
2	*	14328.00	43.05	-5.81	37.24	54.00	-16.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #371

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 66 Majiehang Industry Zone, Minshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #372

Date: 15/06/11

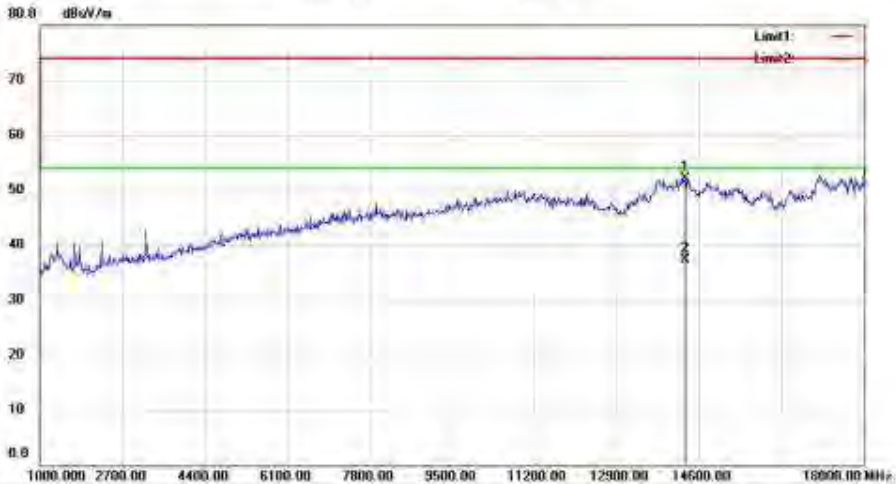

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5795 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14311.00	57.90	-5.78	52.12	74.00	-21.88	peak		
2	*	14311.00	43.09	-5.78	37.31	54.00	-16.69	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #372

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #373

Date: 15/06/11

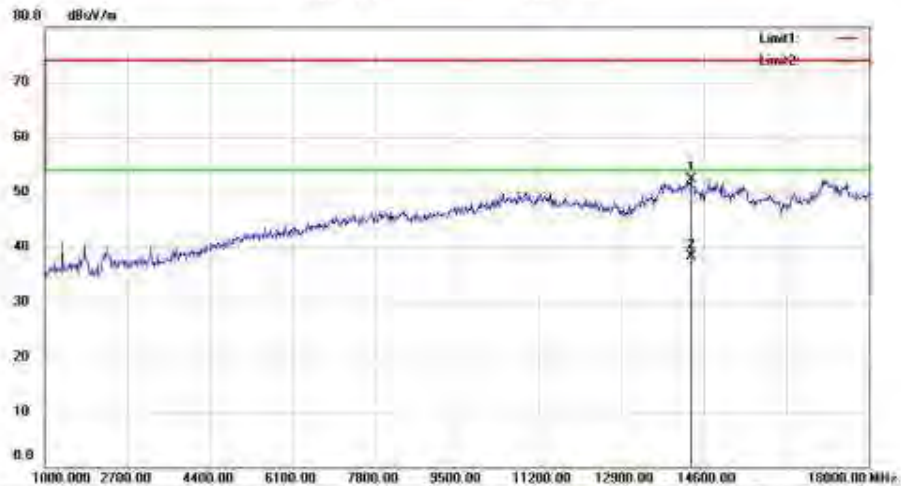

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5190 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14328.00	58.19	-5.81	52.38	74.00	-21.62	peak		
2	*	14328.00	44.05	-5.81	38.24	54.00	-15.76	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #373

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Data: #374

Date: 15/06/11

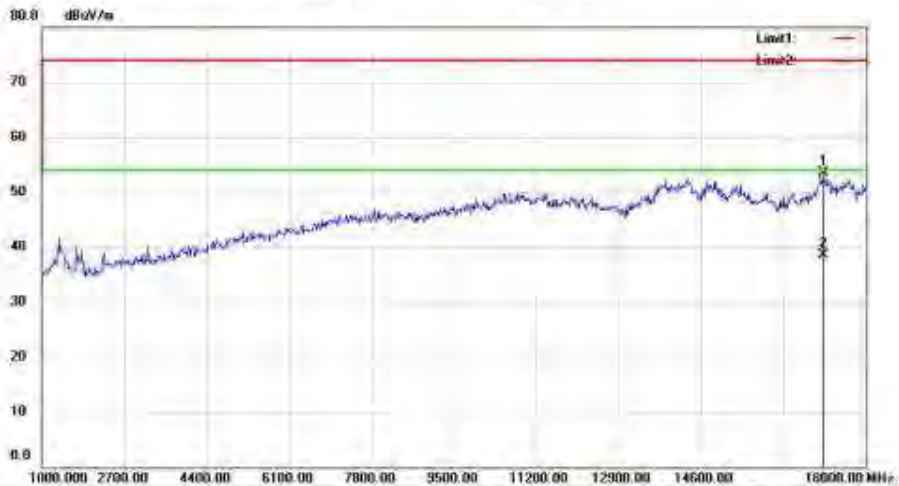

Site: site #1

Polarization: Vertical

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5190 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Delta	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17133.00	57.33	-3.91	53.42	74.00	-20.58	peak		
2	*	17133.00	42.32	-3.91	38.41	54.00	-15.59	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #374

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecheng Industry Zone, Nanshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #375

Date: 15/06/11

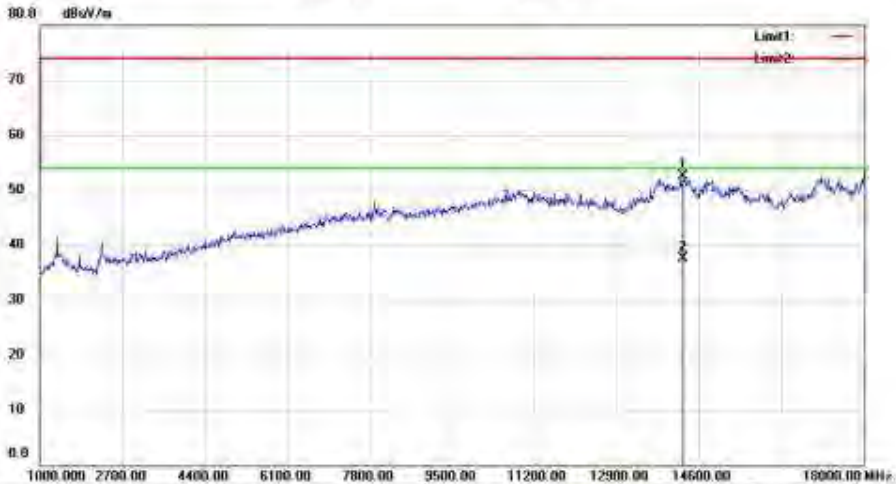

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5230 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14277.00	58.16	-5.73	52.43	74.00	-21.57	peak		
2	*	14277.00	43.15	-5.73	37.42	54.00	-16.58	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #375

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #376

Date: 15/06/11

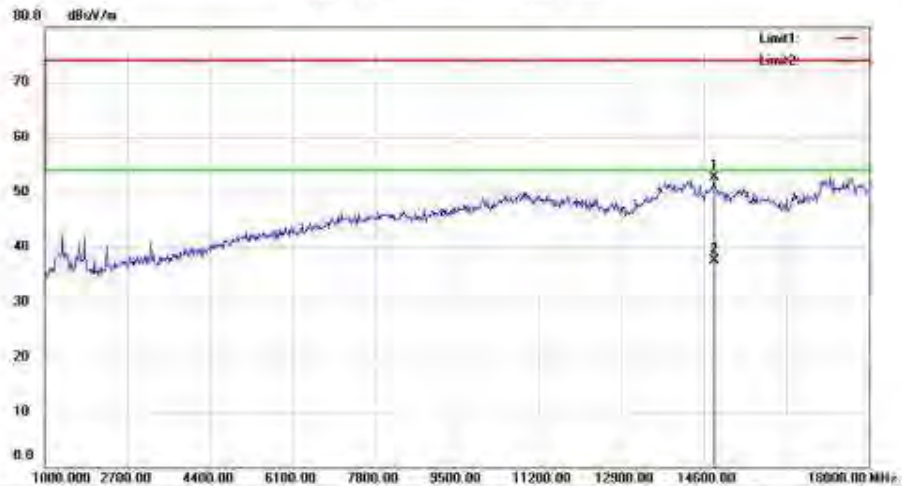

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5230 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		14804.00	59.29	-6.56	52.73	74.00	-21.27	peak		
2	*	14804.00	44.04	-6.56	37.48	54.00	-16.52	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #376

Page: 1

Shenzhen EMTEK Co., Ltd
Bldg. 88 Majiecong Industry Zone, Nanshan District, Shenzhen, Guangdong 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #377

Date: 15/06/11

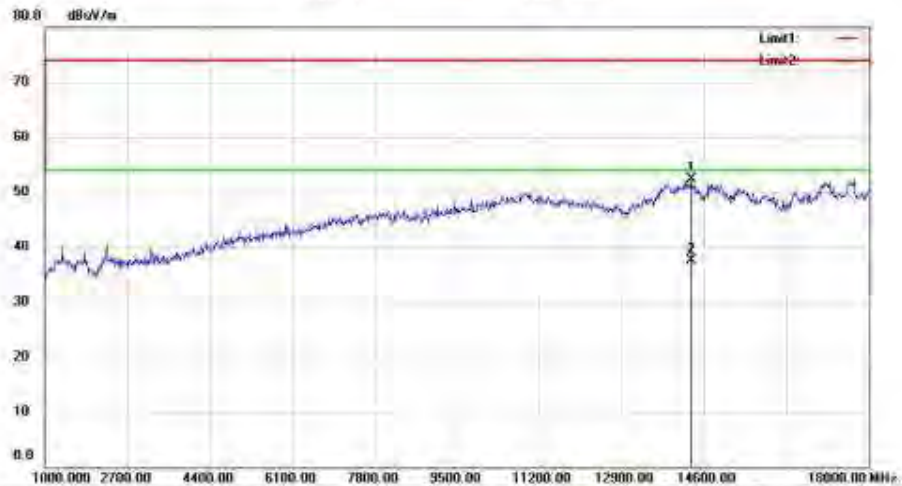

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5755 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14328.00	58.21	-5.81	52.40	74.00	-21.60	peak		
2	*	14328.00	43.35	-5.81	37.54	54.00	-16.46	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #377

Page: 1

Shanghai EMTEK Co., Ltd
Bldg 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518055 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Date: #378

Date: 15/06/11

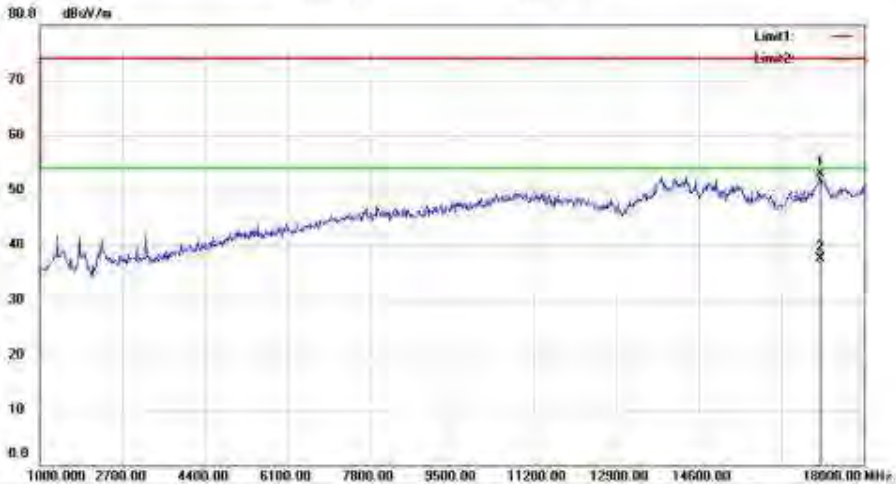

Site: site #1
Limit: (RE)FCC PART 15 CLASS B
EUT: Pad/Tablet
M/N: NS-P16AT785HD
Mode: 11AC HT40 5755 Ant2
Note:
Polarization: **Vertical**
Power: AC 120V/60Hz
Temperature: 24 C
Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17099.00	57.15	-4.19	52.96	74.00	-21.04	peak		
2	*	17099.00	41.68	-4.19	37.49	54.00	-16.51	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #378

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518058, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV2

Data: #379

Date: 15/06/11

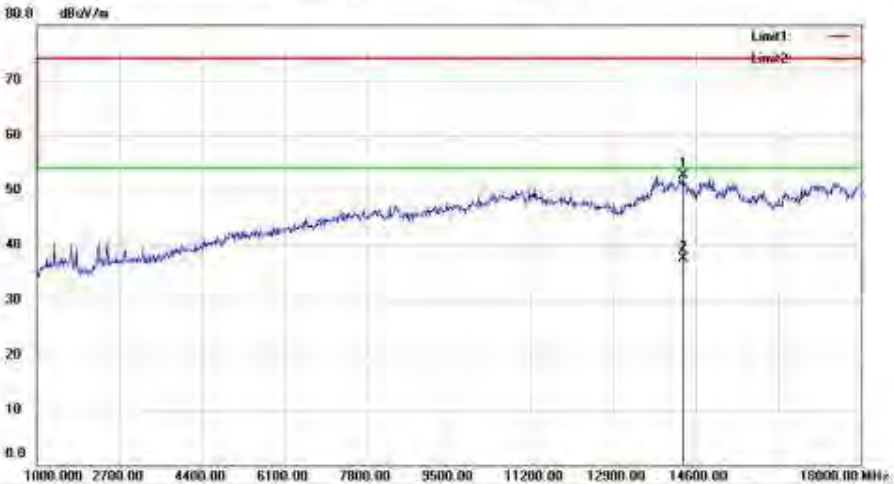

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5795 Ant2

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		14328.00	58.48	-5.81	52.67	74.00	-21.33	peak		
2	*	14328.00	43.39	-5.81	37.58	54.00	-16.42	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV2\Data: #379

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong 518058 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Date: #380

Date: 15/06/11

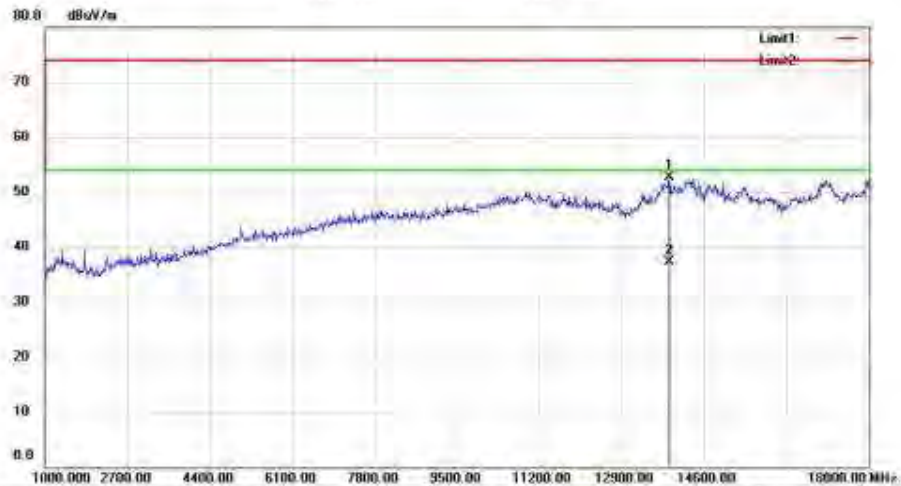

Site: site #1

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT40 5795 Ant2

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13886.00	58.63	-5.85	52.78	74.00	-21.22	peak		
2	*	13886.00	43.20	-5.85	37.35	54.00	-16.65	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #380

Page: 1

Shanghai EMTEK Co., Ltd
Bldg. 88 Majielong Industry Zone, Minshan District, Shenzhen, Guangdong, 518055, P. R. China
www.emtek.com.cn Tel: +86-755-2695 4260 Fax: +86-755-2695 4262




Radiated Emission Measurement

File: TUV 2

Data: #381

Date: 15/06/11

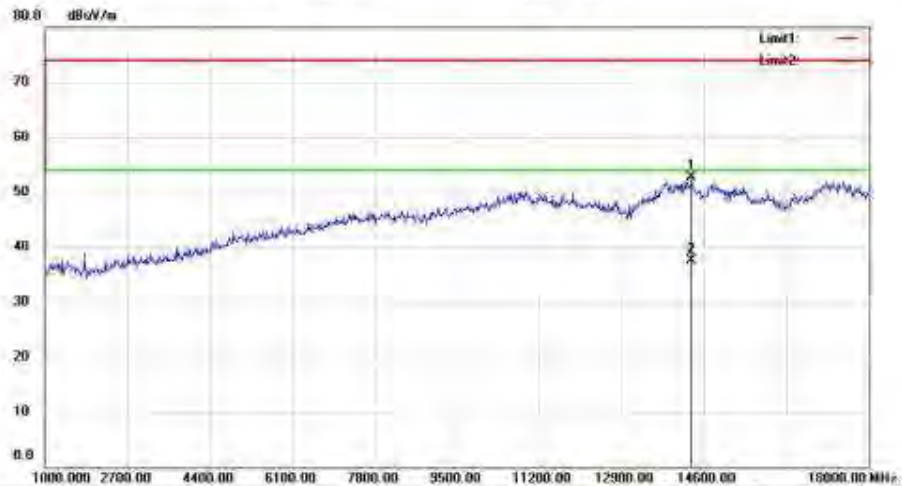

Site: site #1

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE) FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: Pad/Tablet

M/N: NS-P16AT785HD

Mode: 11AC HT80 5210 Ant1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		14345.00	58.57	-5.84	52.73	74.00	-21.27	peak		
2	*	14345.00	43.43	-5.84	37.59	54.00	-16.41	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2\Data: #381

Page: 1