427 West 12800 South
Draper, UT 84020

Test Report Attachment

FCC ID	SWX-U7PROO
ISED ID	6545A-U7PROO
Equipment Under Test	U7-Pro-Outdoor
Test Report Serial Number	TR9565_01
Date of Tests	2-7 October 2024, 7 November 2024 & 3-4 December 2024
Report Issue Date	4 December 2024

Test Personnel

Testing performed by	Evan Hartzell / Clay Allred

Test Location

Testing was performed at the Unified Compliance Laboratory located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2025. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2025. Unified Compliance Laboratory has been assigned Conformity Assessment Number US0223 by ISED and MRA US5037.

NVLAP LAB CODE 600241-0

1 Table of Contents

Test Personnel *1*

Test Location *1*

2 UNII-2A Internal Antenna *3*

2.1 OFDM Mode **3**

2.1.1 Summary 3

2.2 HE Mode **19**

2.2.1 Summary 19

3 UNII-2A External Antenna *44*

3.1 OFDM Mode **44**

3.1.1 Summary 44

3.2 HE Mode **55**

3.2.1 Summary 55

2 UNII-2A Internal Antenna

NOTE: The first channel contains the equipment setting tables, if subsequent channels do not have an equipment setting tables then the equipment setting table is the same as the first channel.

2.1 OFDM Mode

2.1.1 Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5260.000	20.000000	PASS
RF output power	5260.000	20.000000	PASS
Power Spectral Density	5260.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5260.000	20.000000	PASS
Emission Bandwidth 26 dB	5280.000	20.000000	PASS
Power Spectral Density	5280.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5280.000	20.000000	PASS
Emission Bandwidth 26 dB	5320.000	20.000000	PASS
Power Spectral Density	5320.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5320.000	20.000000	PASS

Emission Bandwidth 26 dB (5260 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	20.000000	---	---	5250.050000	5270.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	4.6	PASS

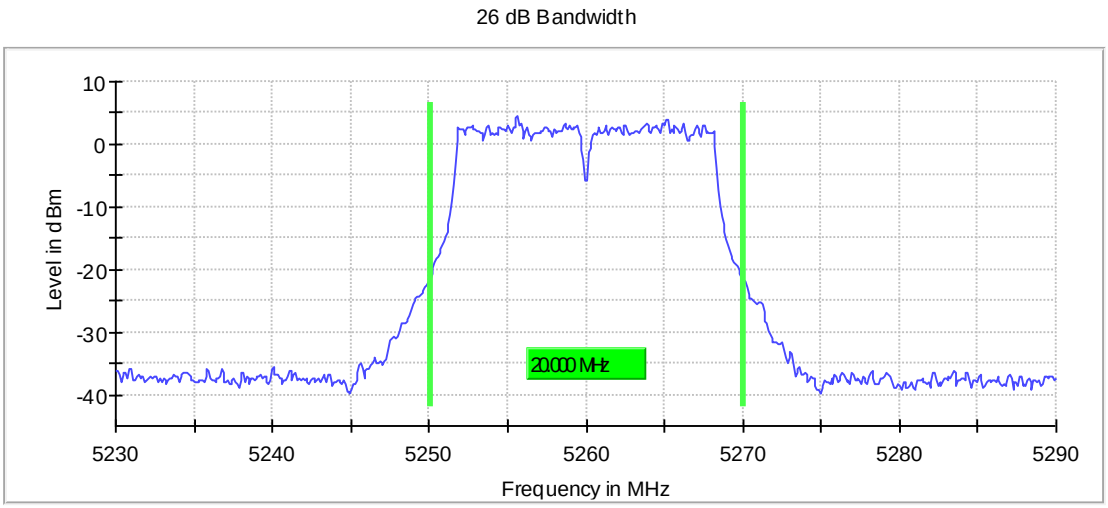
26 dB Bandwidth
10
0
-10
-20
-30
-40
Level in dBm
20.000 MHz
5230
5240
5250
5260
5270
5280
5290
Frequency in MHz

Bandwidth

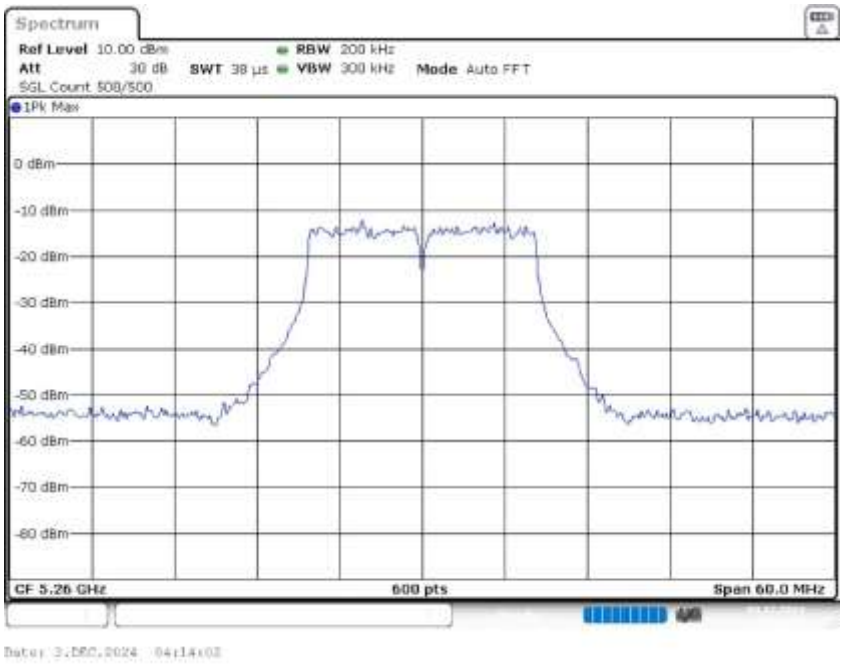

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	300.000 kHz	>= 240.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	17.9	24.0	17.9	97.166	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000

Time resolution	1.000 µs	1.000 µs

Power Spectral Density (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5260.000000	5253.465347	5.675	11.0	PASS

Ports

Port	State
1	used
2	used

PSD Connector 1

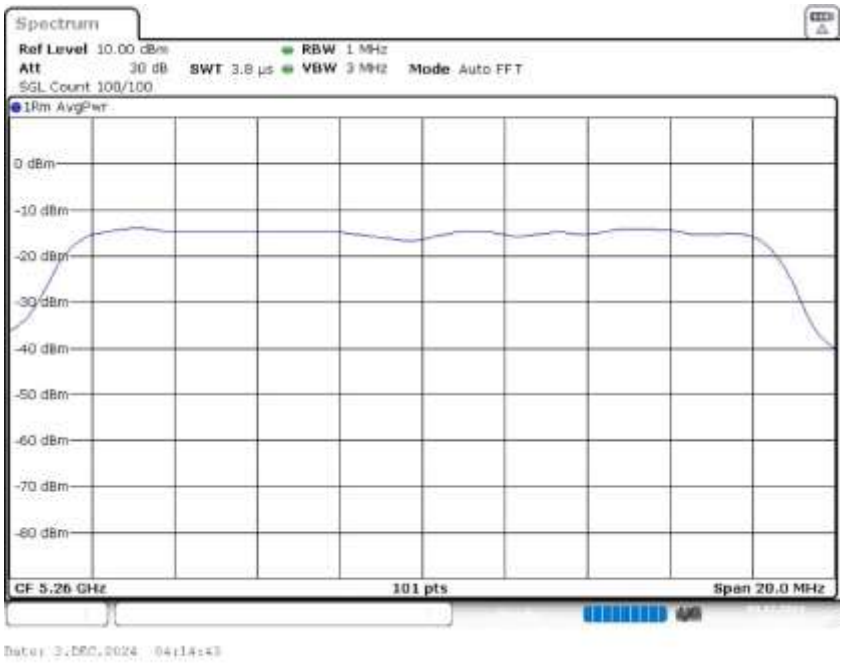

PSD Connector 2

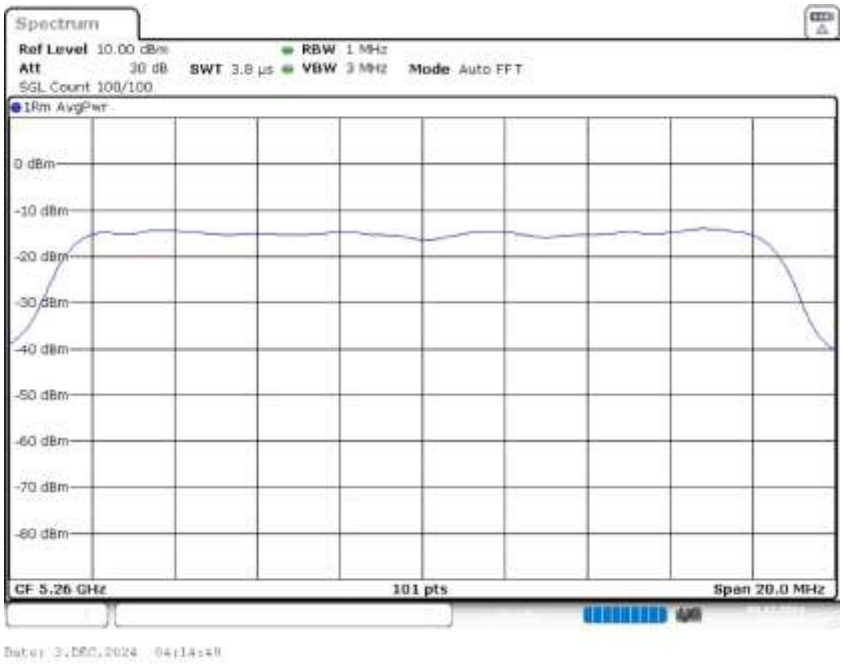

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.25000 GHz	5.25000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	3.788 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5260 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	16.600000	---	---	5251.650000	5268.250000

DUT Frequency (MHz)	Result
5260.000000	PASS

99 % Bandwidth

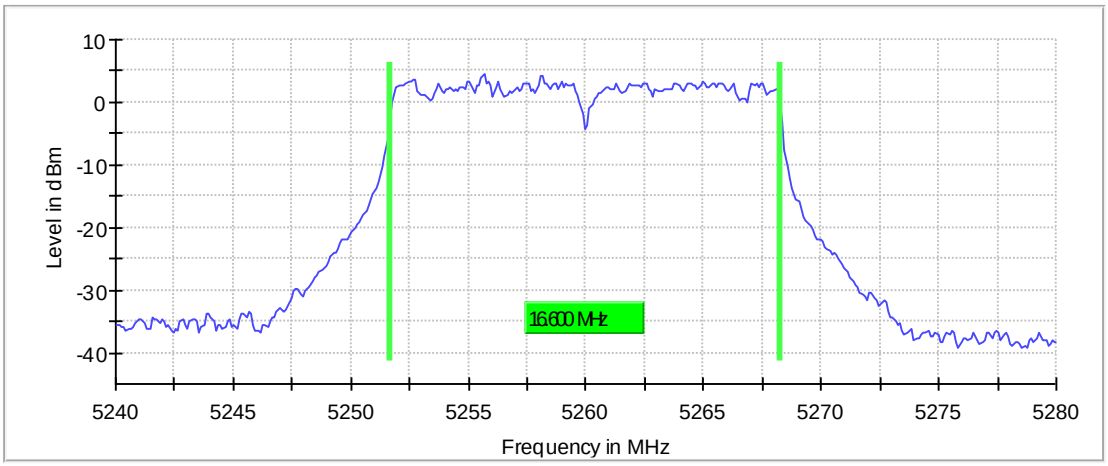

Bandwidth

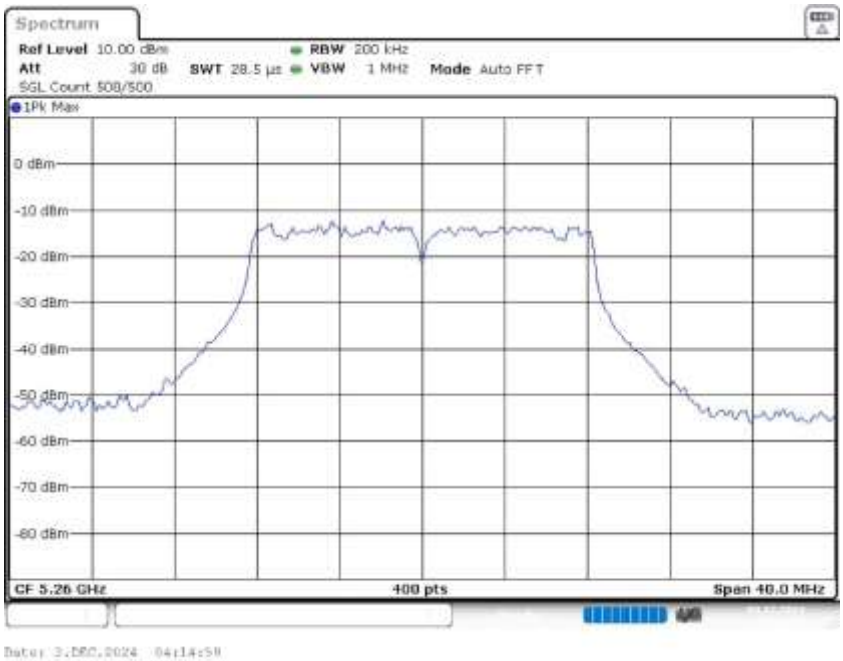

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.24000 GHz	5.24000 GHz
Stop Frequency	5.28000 GHz	5.28000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400

Sweeptime	28.477 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5280 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	20.500000	---	---	5269.650000	5290.150000

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	3.2	PASS

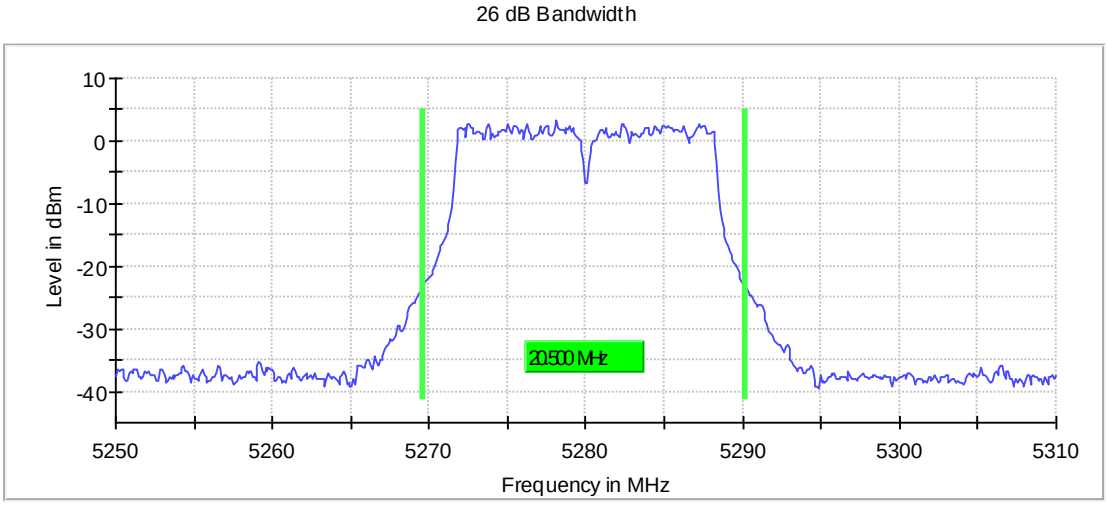

Bandwidth

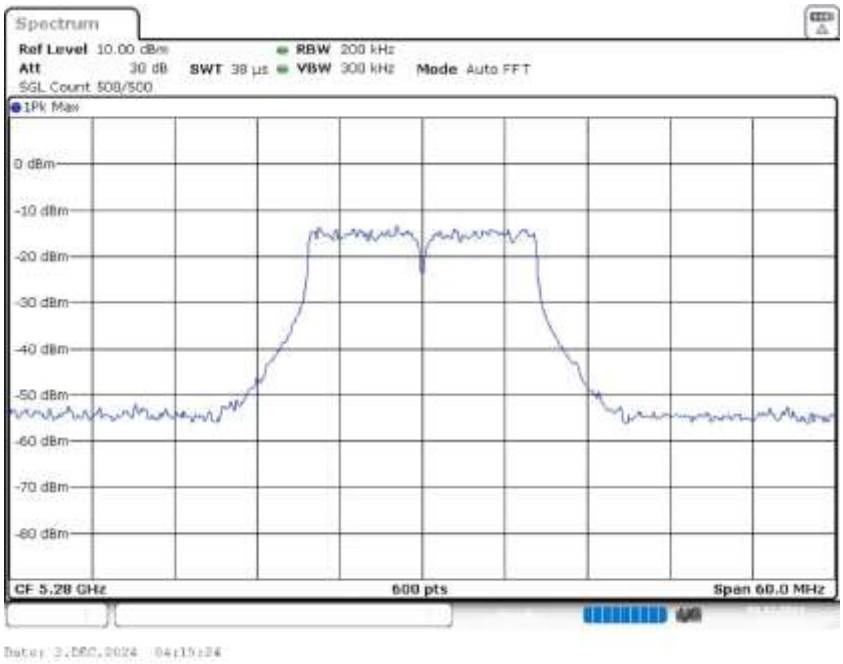

Power Spectral Density (5280 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5280.000000	5273.465347	5.497	11.0	PASS

Ports

Port	State
1	used
2	used

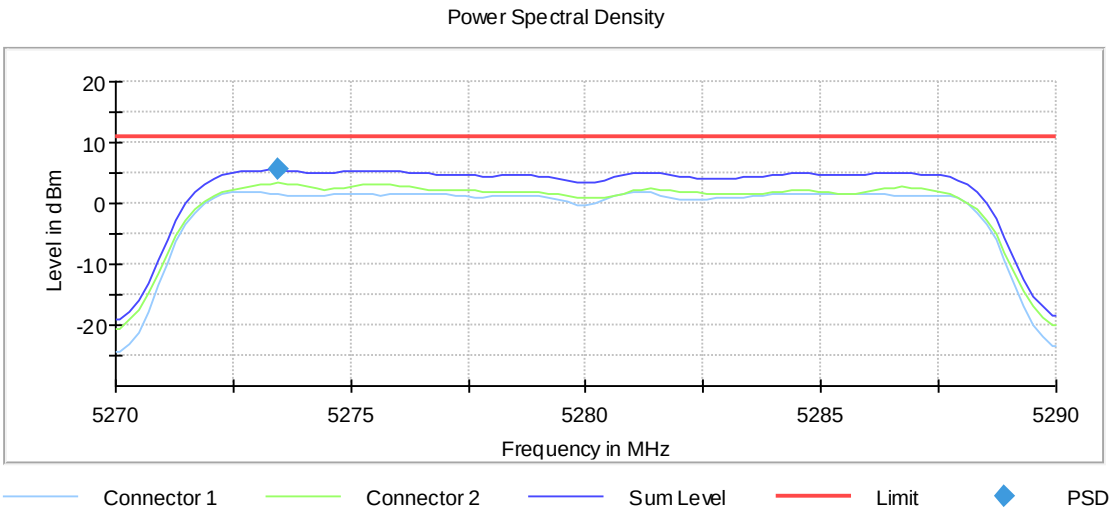

PSD Connector 1

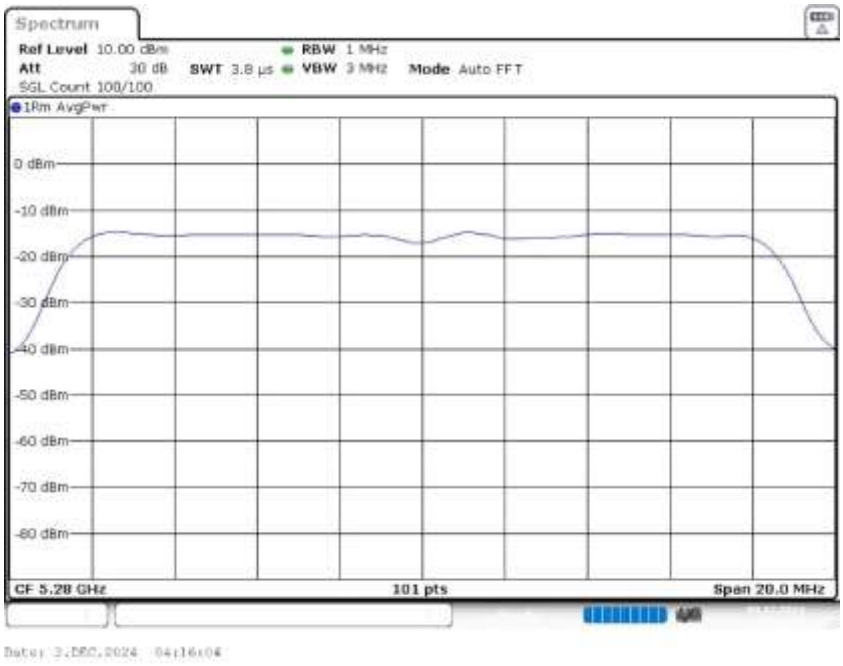

PSD Connector 2

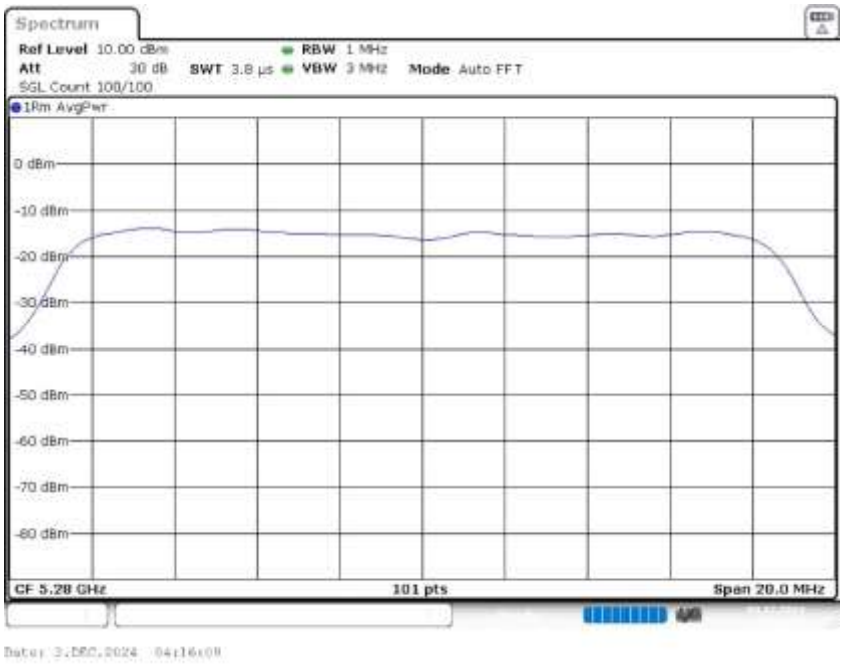

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.27000 GHz	5.27000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	3.788 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5280 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	16.600000	---	---	5271.650000	5288.250000

DUT Frequency (MHz)	Result
5280.000000	PASS

99 % Bandwidth

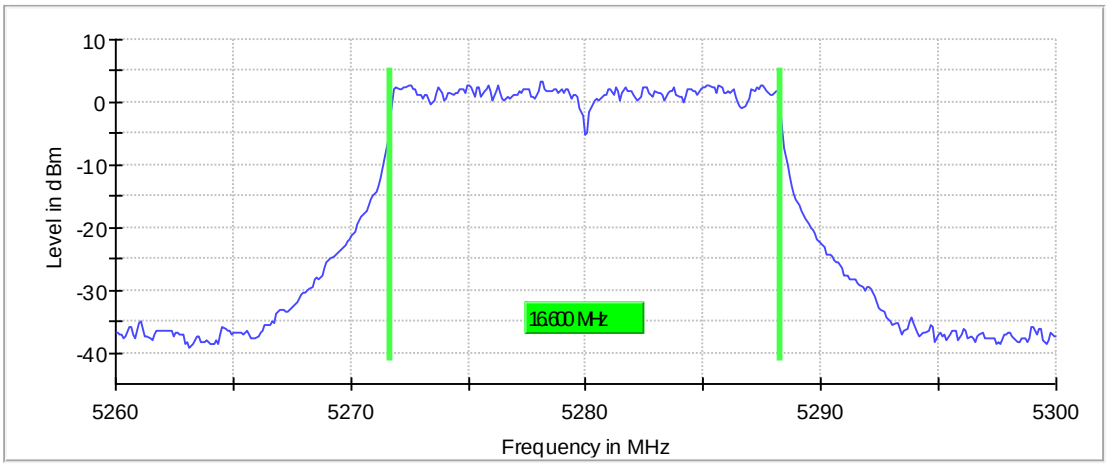

Bandwidth

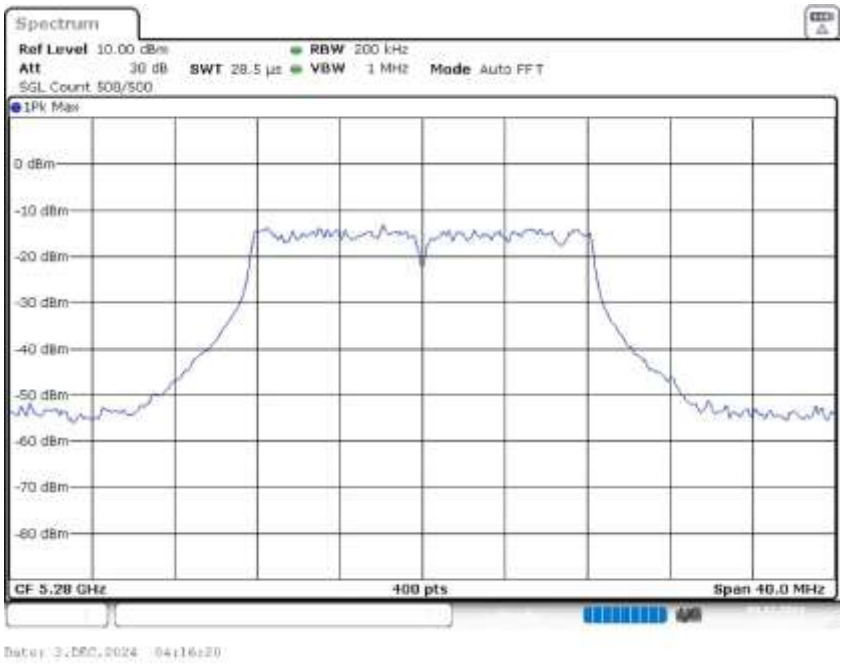

Emission Bandwidth 26 dB (5320 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	20.400000	---	---	5309.650000	5330.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	3.5	PASS

26 dB Bandwidth

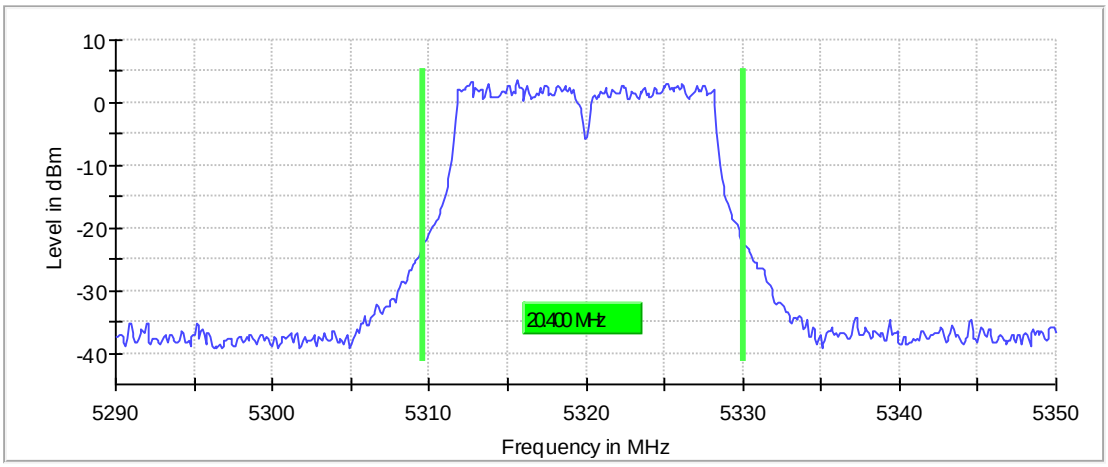

Bandwidth

Power Spectral Density (5320 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5320.000000	5314.059406	5.008	11.0	PASS

Ports

Port	State
1	used
2	used

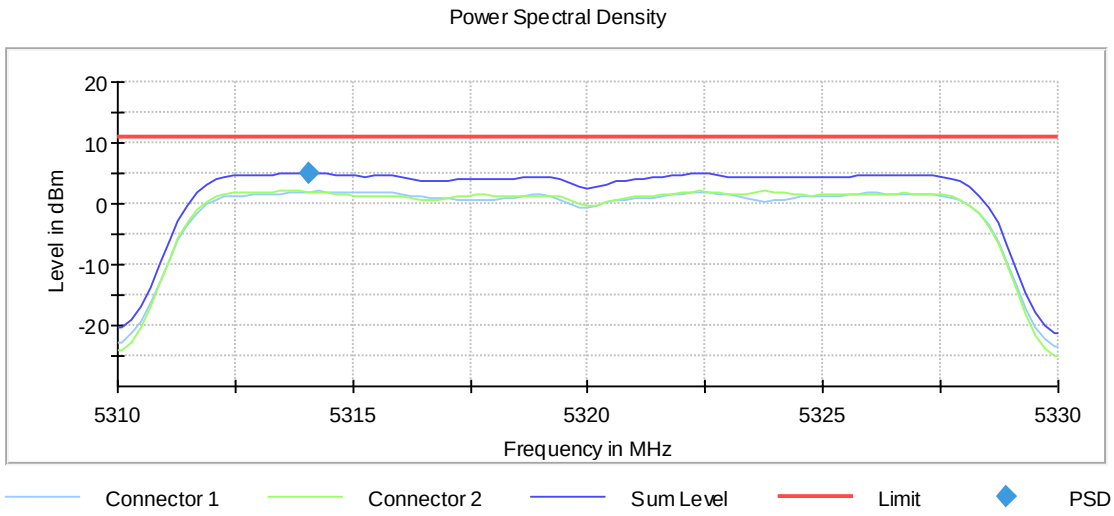

PSD Connector 1

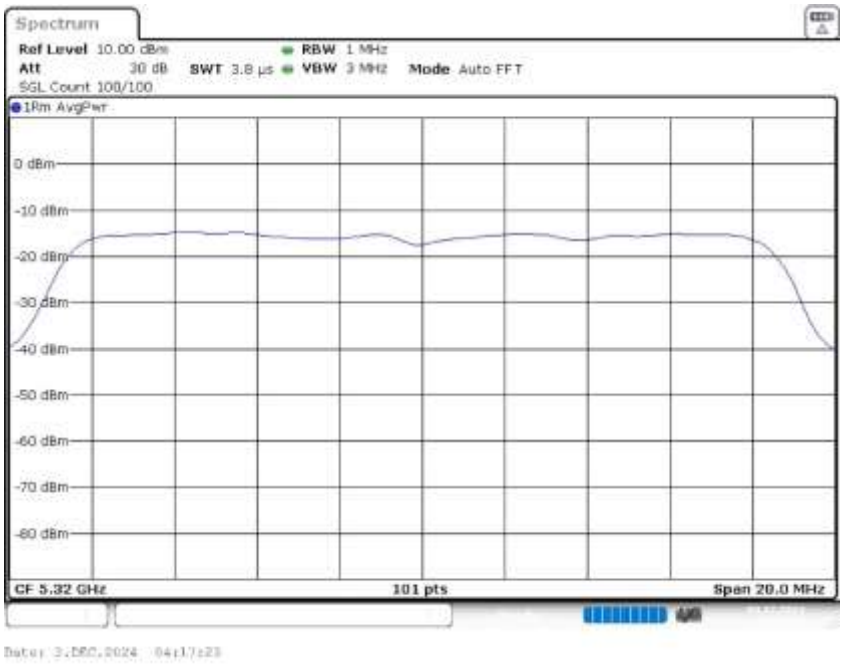

PSD Connector 2

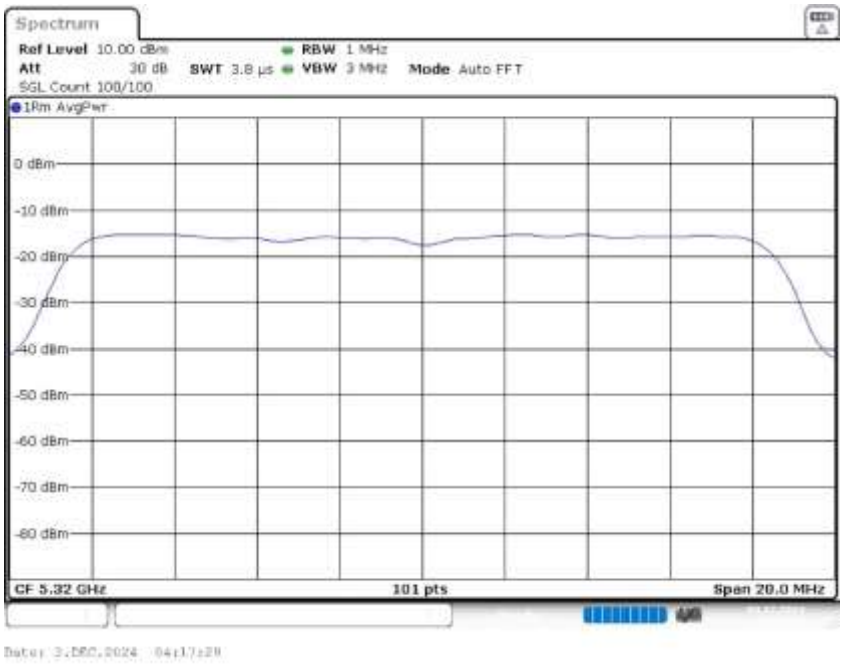

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.31000 GHz	5.31000 GHz
Stop Frequency	5.33000 GHz	5.33000 GHz

Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	3.788 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5320 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	16.500000	---	---	5311.750000	5328.250000

DUT Frequency (MHz)	Result
5320.000000	PASS

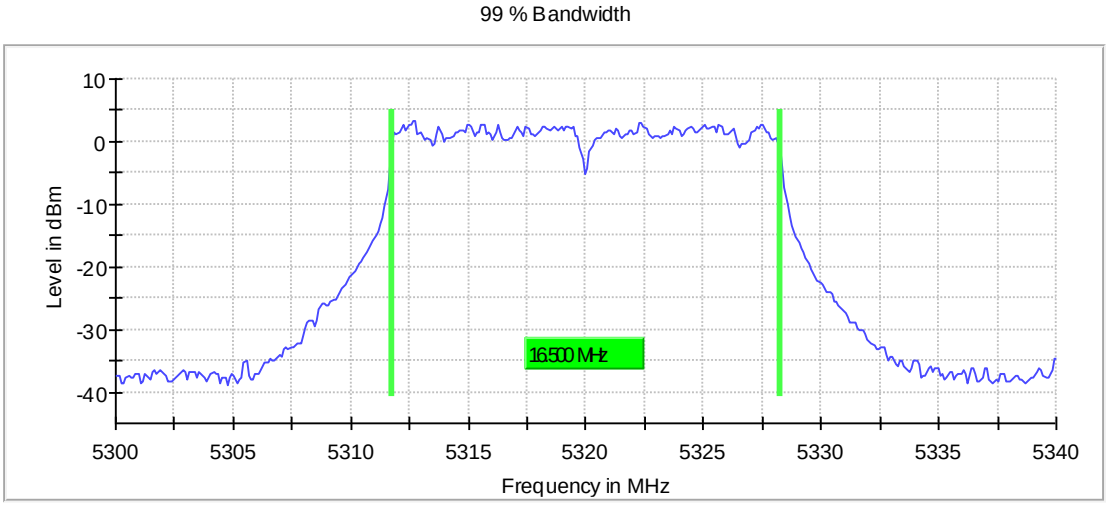

Bandwidth

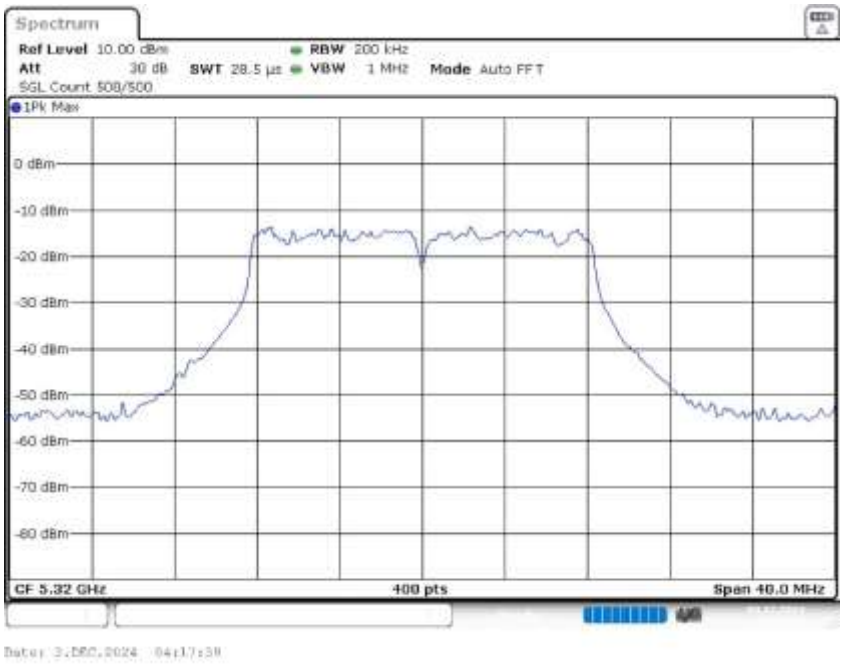
Spectrum
Ref Level 10.00 dBm
RBW 200 kHz
Att 30 dB
SWT 28.5 µs
VBW 1 MHz
Mode Auto FFT
SGL Count 500/500
1Pk Max
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
-80 dBm
CF 5.32 GHz
400 pts
Span 40.0 MHz

2.2 HE Mode

2.2.1 Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5260.000	20.000000	PASS
RF output power	5260.000	20.000000	PASS
Power Spectral Density	5260.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5260.000	20.000000	PASS
Emission Bandwidth 26 dB	5280.000	20.000000	PASS
Power Spectral Density	5280.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5280.000	20.000000	PASS
Emission Bandwidth 26 dB	5320.000	20.000000	PASS
Power Spectral Density	5320.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5320.000	20.000000	PASS
Emission Bandwidth 26 dB	5270.000	40.000000	PASS
Power Spectral Density	5270.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5270.000	40.000000	PASS
Emission Bandwidth 26 dB	5310.000	40.000000	PASS
Power Spectral Density	5310.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5310.000	40.000000	PASS
Emission Bandwidth 26 dB	5290.000	80.000000	PASS
Power Spectral Density	5290.000	80.000000	PASS
Occupied Channel Bandwidth 99%	5290.000	80.000000	PASS
Emission Bandwidth 26 dB	5250.000	160.000000	PASS
Power Spectral Density	5250.000	160.000000	PASS
Occupied Channel Bandwidth 99%	5250.000	160.000000	PASS

Emission Bandwidth 26 dB (5260 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	21.700000	---	---	5248.950000	5270.650000

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	5.9	PASS

26 dB Bandwidth

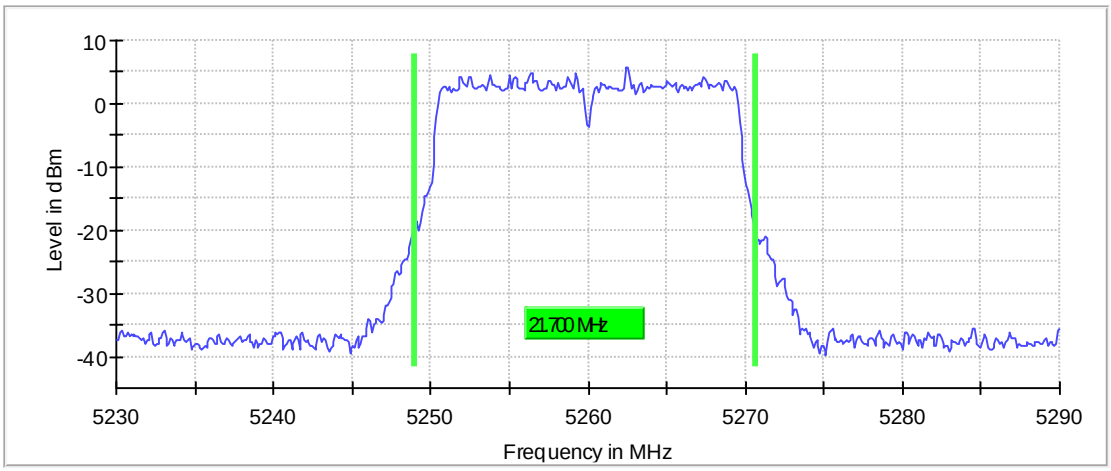

Bandwidth

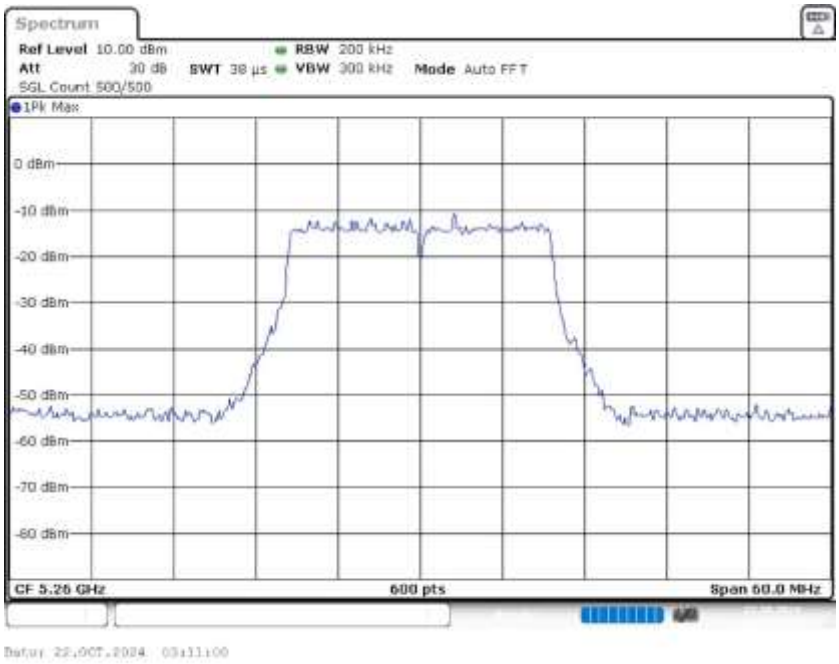

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	300.000 kHz	>= 240.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 µs	AUTO

Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	18.5	24.0	18.5	99.725	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

Power Spectral Density (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5260.000000	5268.316832	5.428	11.0	PASS

Ports

Port	State
1	used
2	used

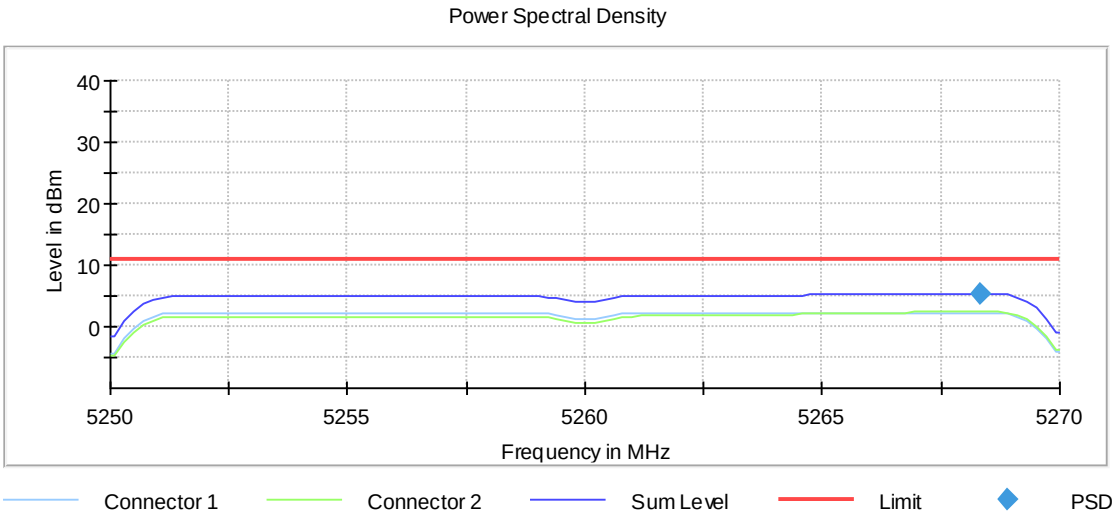

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.25000 GHz	5.25000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5260 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	19.250000	---	---	5250.375000	5269.625000

DUT Frequency (MHz)	Result
5260.000000	PASS

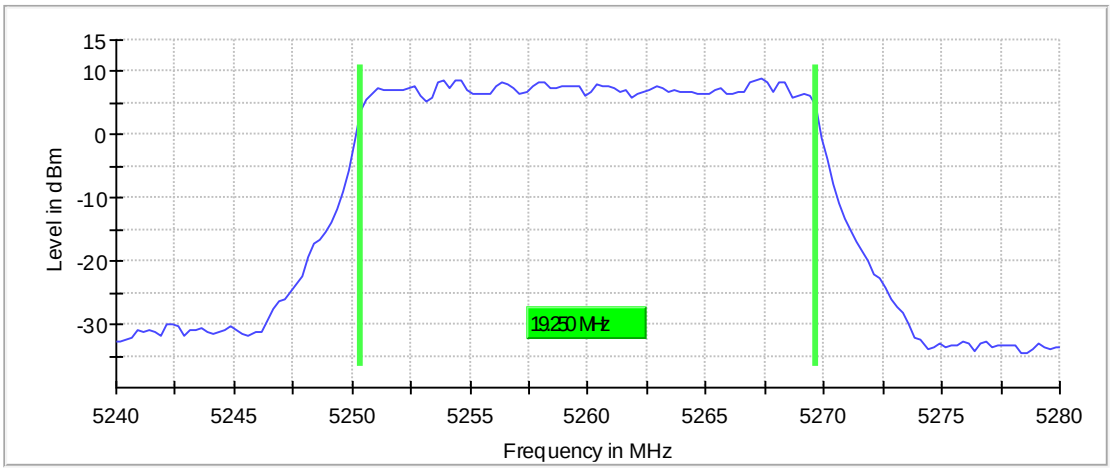

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.24000 GHz	5.24000 GHz
Stop Frequency	5.28000 GHz	5.28000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5280 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	23.100000	---	---	5268.050000	5291.150000

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	3.8	PASS

26 dB Bandwidth

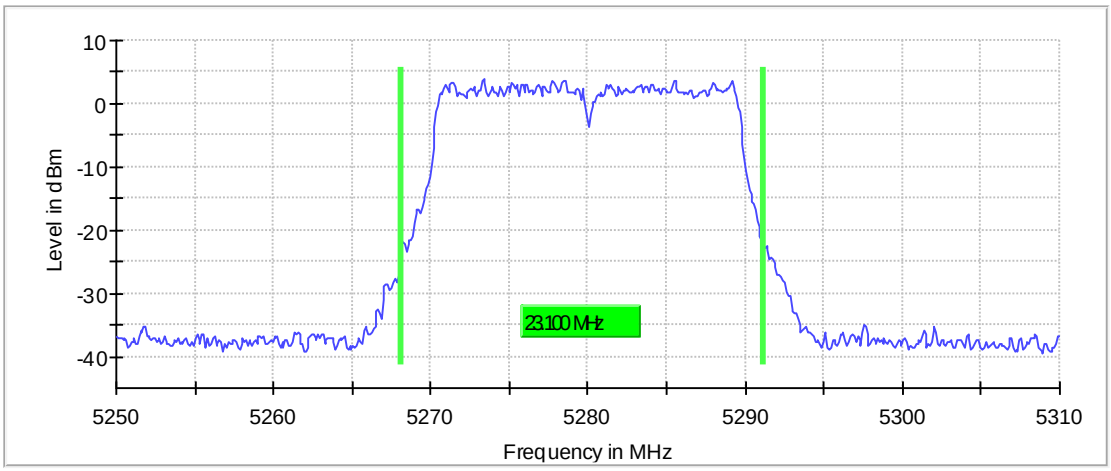

Bandwidth

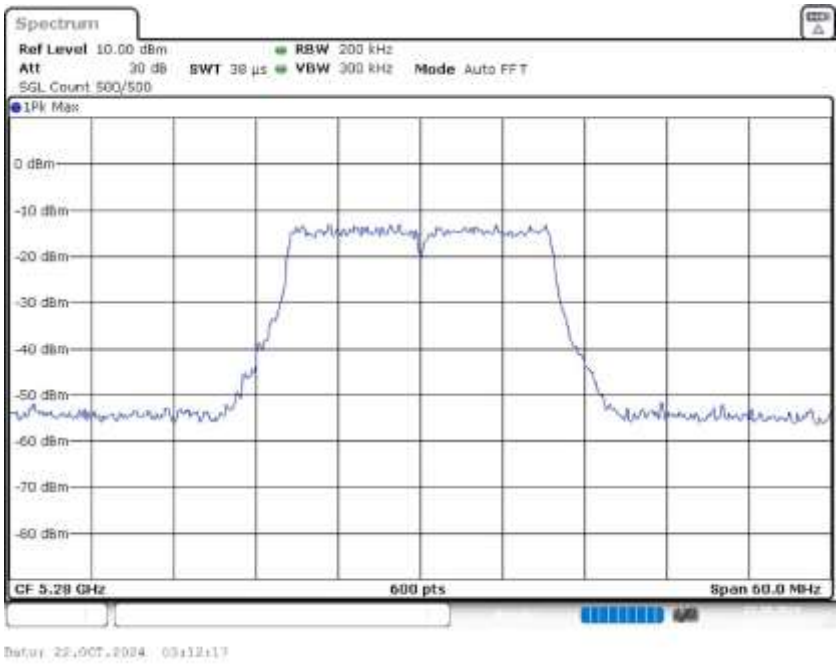

Power Spectral Density (5280 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5280.000000	5271.683168	5.202	11.0	PASS

Ports

Port	State

1	used
2	used

Power Spectral Density

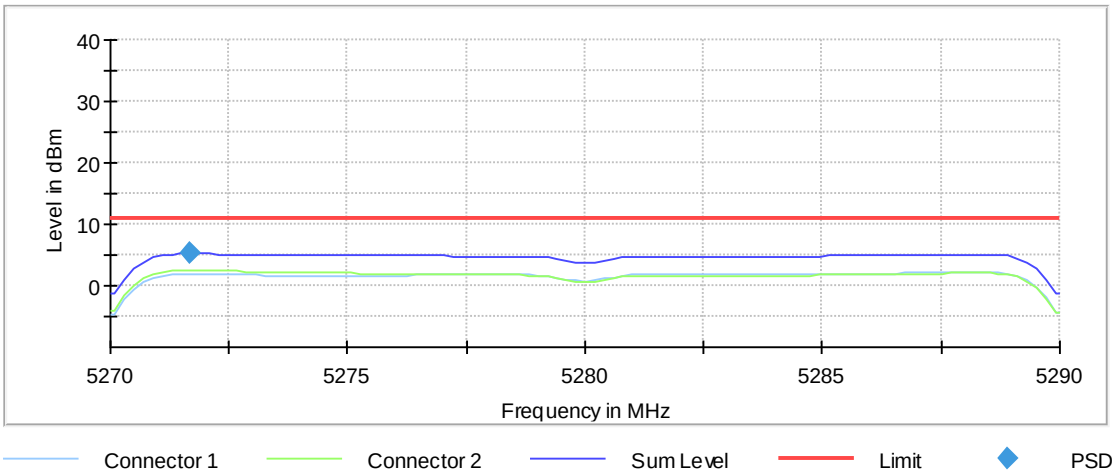

Occupied Channel Bandwidth 99% (5280 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	19.250000	---	---	5270.375000	5289.625000

DUT Frequency (MHz)	Result
5280.000000	PASS

99 % Bandwidth

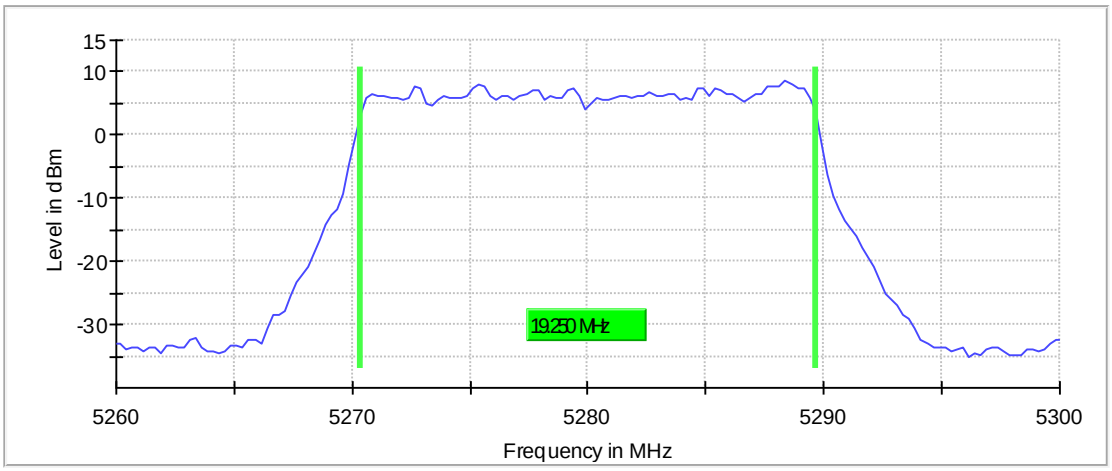

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.26000 GHz	5.26000 GHz
Stop Frequency	5.30000 GHz	5.30000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5320 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	22.900000	---	---	5308.250000	5331.150000

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	4.3	PASS

26 dB Bandwidth

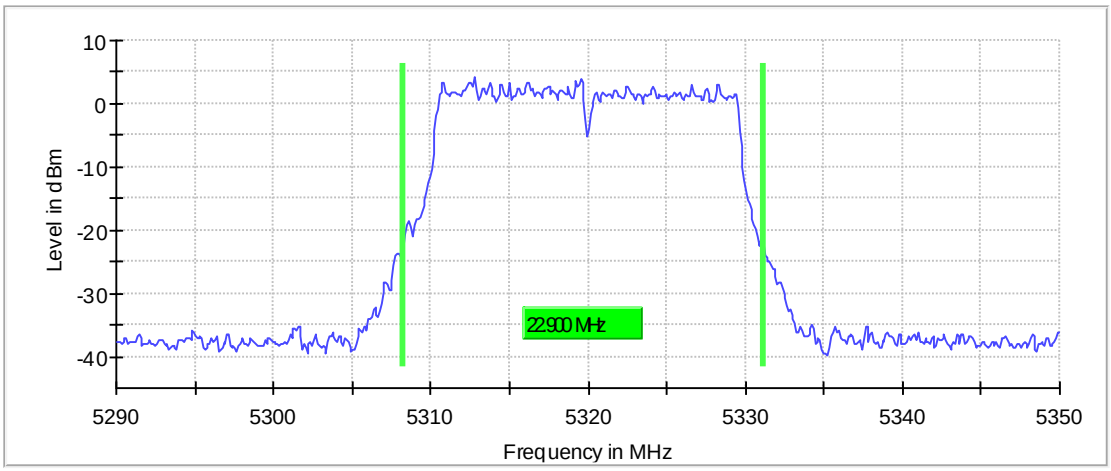

Bandwidth

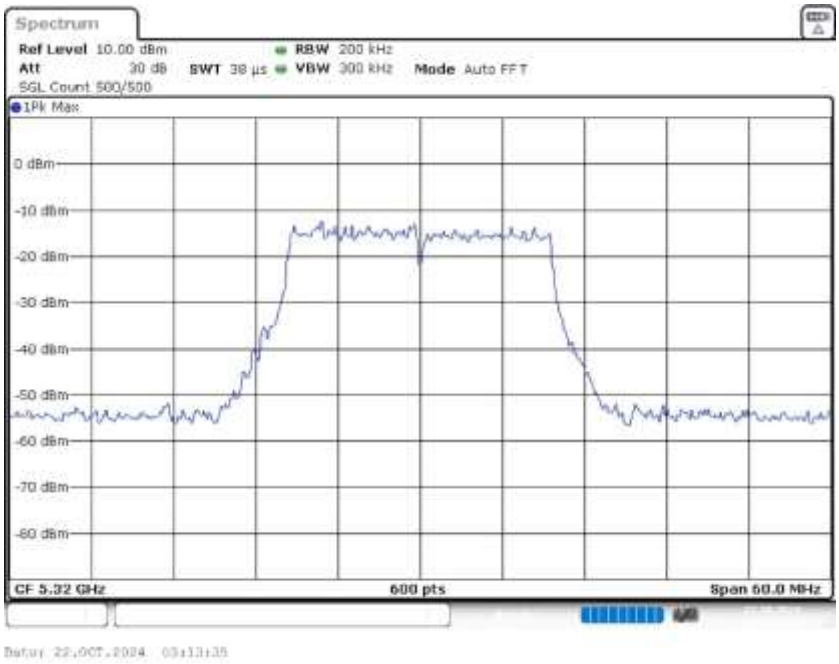

Power Spectral Density (5320 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5320.000000	5311.683168	5.140	11.0	PASS

Ports

Port	State
1	used
2	used

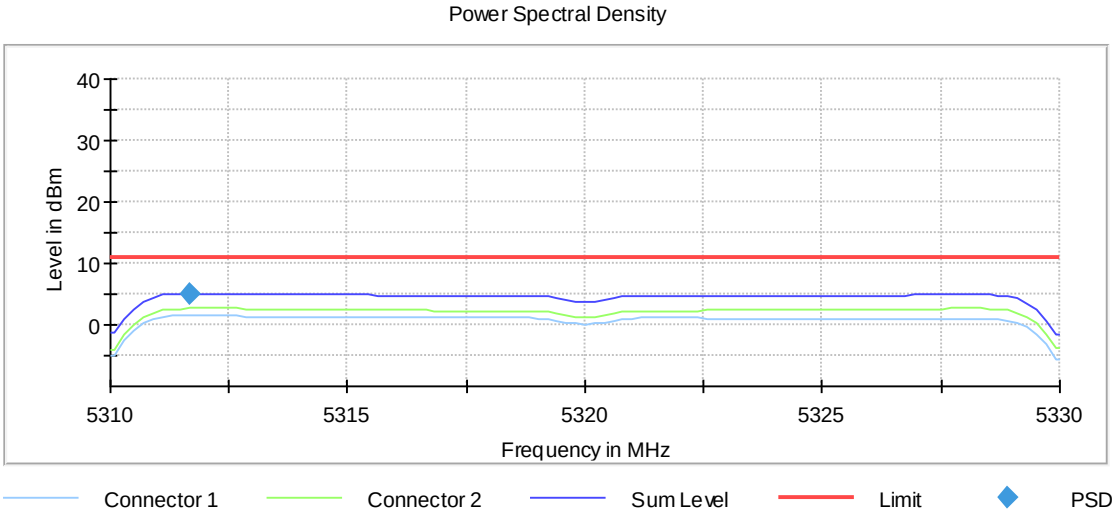

Occupied Channel Bandwidth 99% (5320 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	19.500000	---	---	5310.125000	5329.625000

DUT Frequency (MHz)	Result
5320.000000	PASS

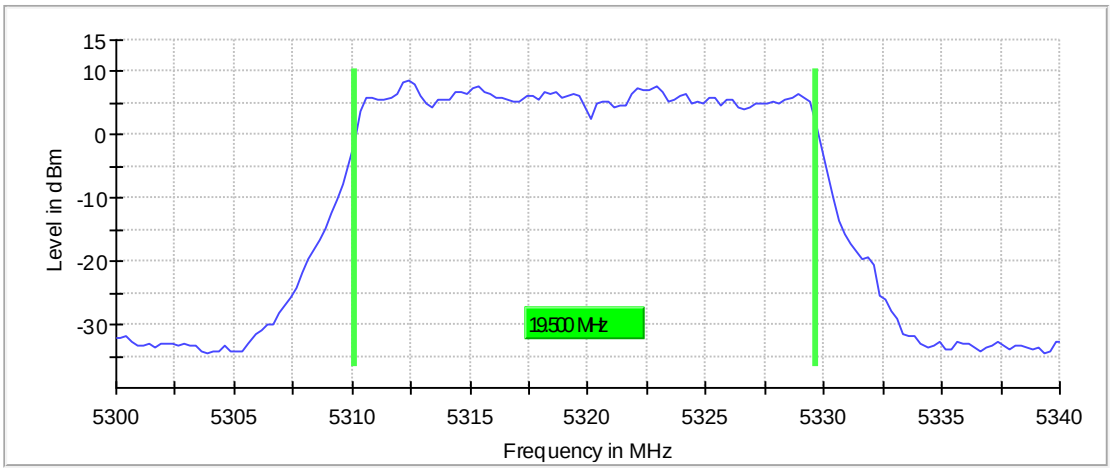

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.30000 GHz	5.30000 GHz
Stop Frequency	5.34000 GHz	5.34000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5270 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	43.500000	---	---	5248.325000	5291.825000

DUT Frequency (MHz)	Max Level (dBm)	Result
5270.000000	4.1	PASS

26 dB Bandwidth

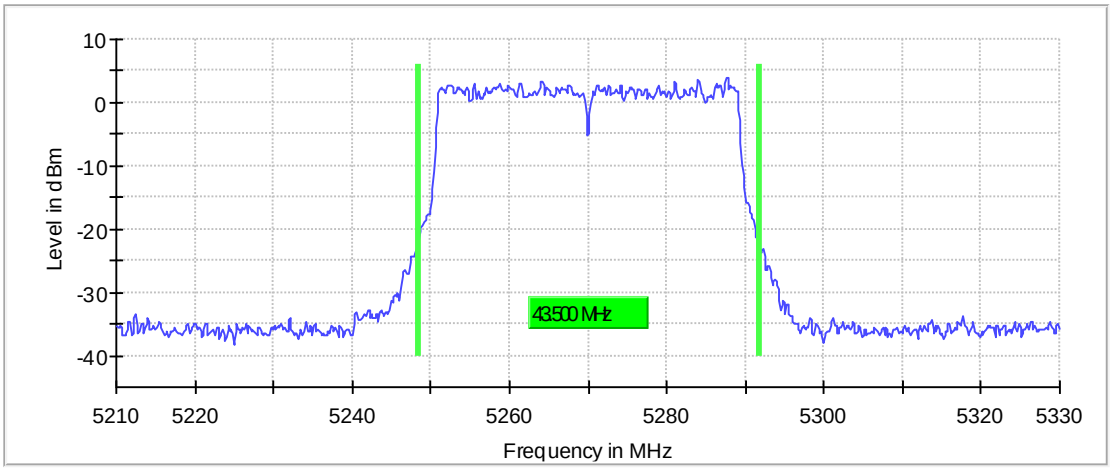

Bandwidth

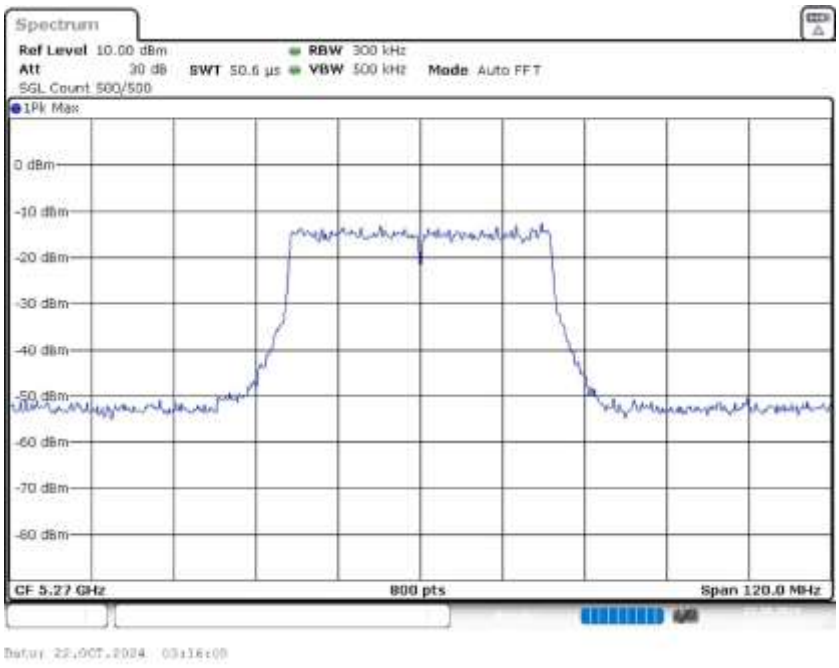

Power Spectral Density (5270 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5270.000000	5266.435644	2.274	11.0	PASS

Ports

Port	State
1	used
2	used

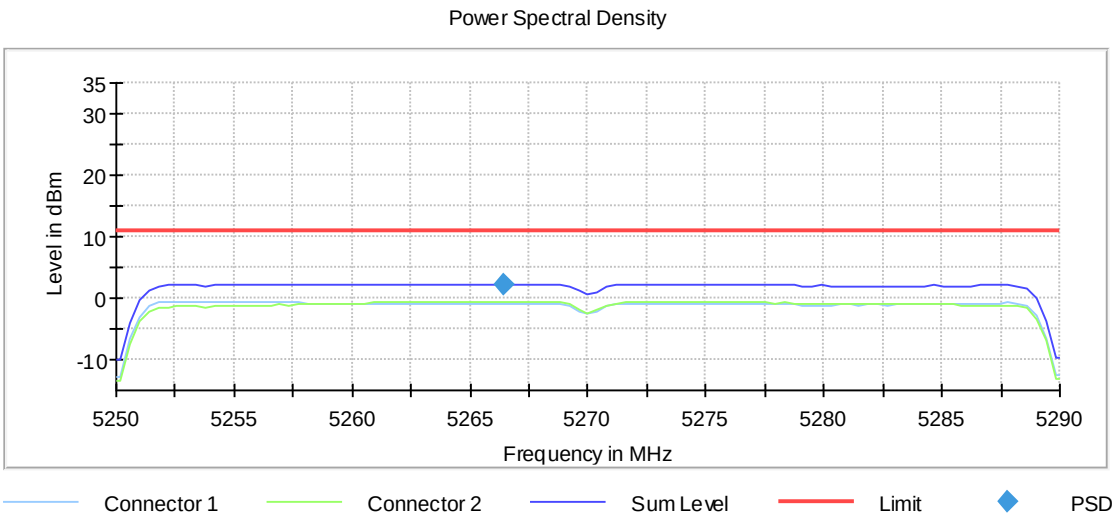

Occupied Channel Bandwidth 99% (5270 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	38.500000	---	---	5250.750000	5289.250000

DUT Frequency (MHz)	Result
5270.000000	PASS

99 % Bandwidth

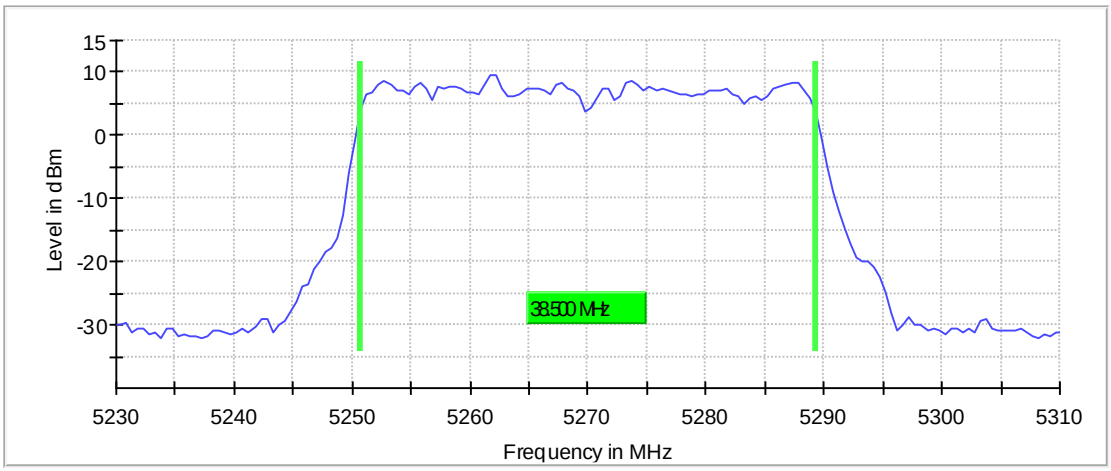

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.31000 GHz	5.31000 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160

Sweeptime	11.438 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5310 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	43.200000	---	---	5288.175000	5331.375000

DUT Frequency (MHz)	Max Level (dBm)	Result
5310.000000	3.2	PASS

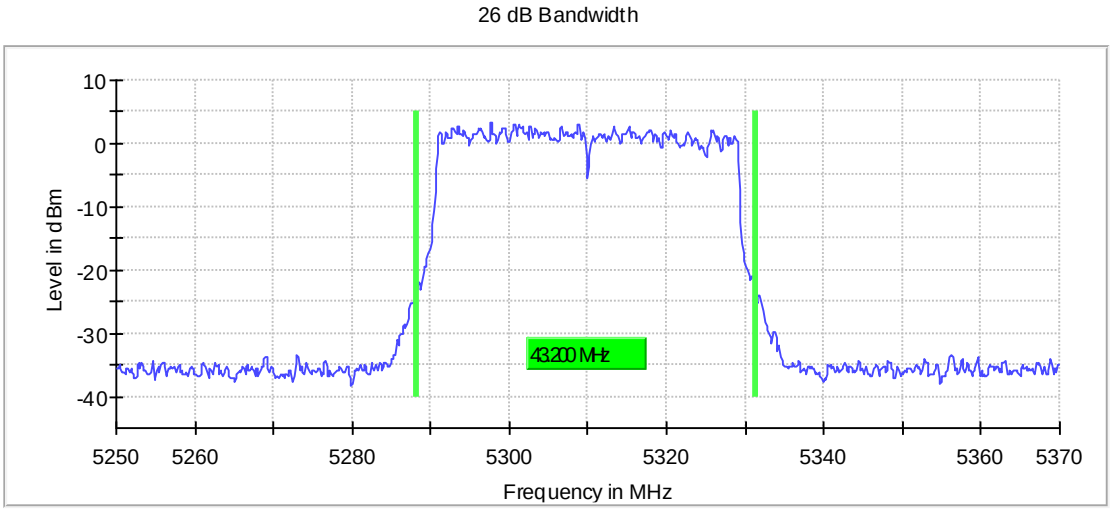

Bandwidth

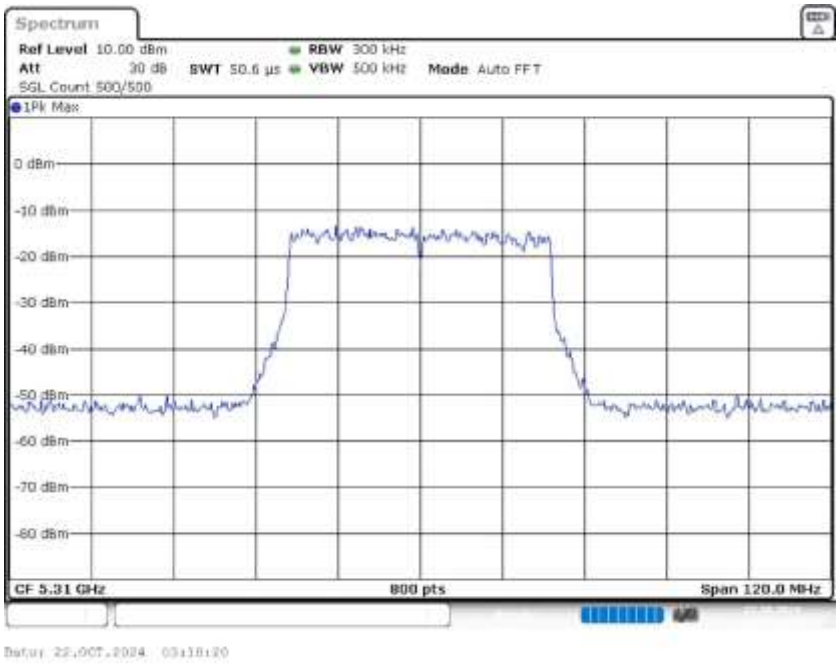

Power Spectral Density (5310 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5310.000000	5314.752475	2.384	11.0	PASS

Ports

Port	State
1	used
2	used

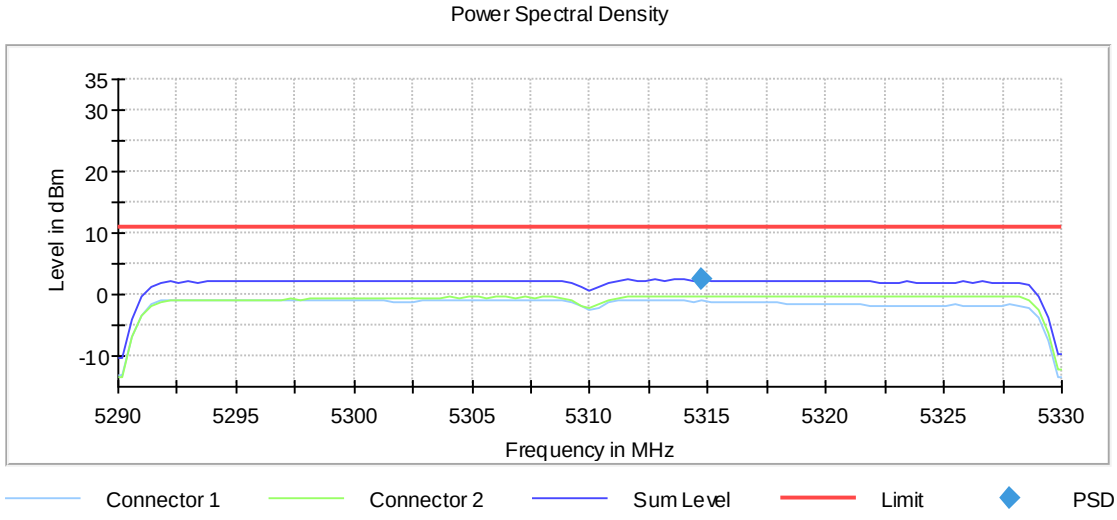

Occupied Channel Bandwidth 99% (5310 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	38.500000	---	---	5290.750000	5329.250000

DUT Frequency (MHz)	Result
5310.000000	PASS

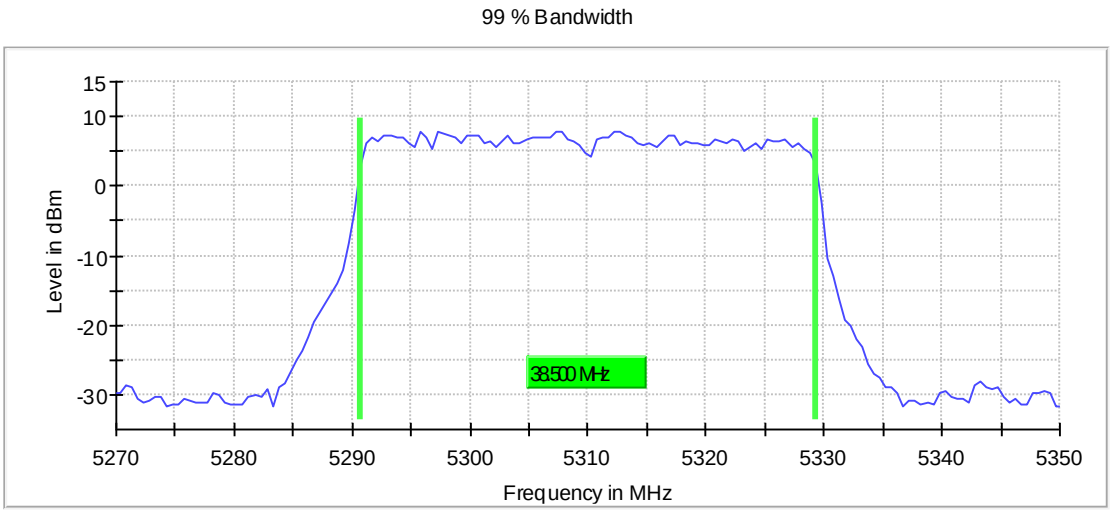

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.27000 GHz	5.27000 GHz
Stop Frequency	5.35000 GHz	5.35000 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
Sweeptime	11.438 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5290 MHz; 24.000 dBm; 80 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	88.500000	---	---	5245.250000	5333.750000

DUT Frequency (MHz)	Max Level (dBm)	Result
5290.000000	5.5	PASS

26 dB Bandwidth

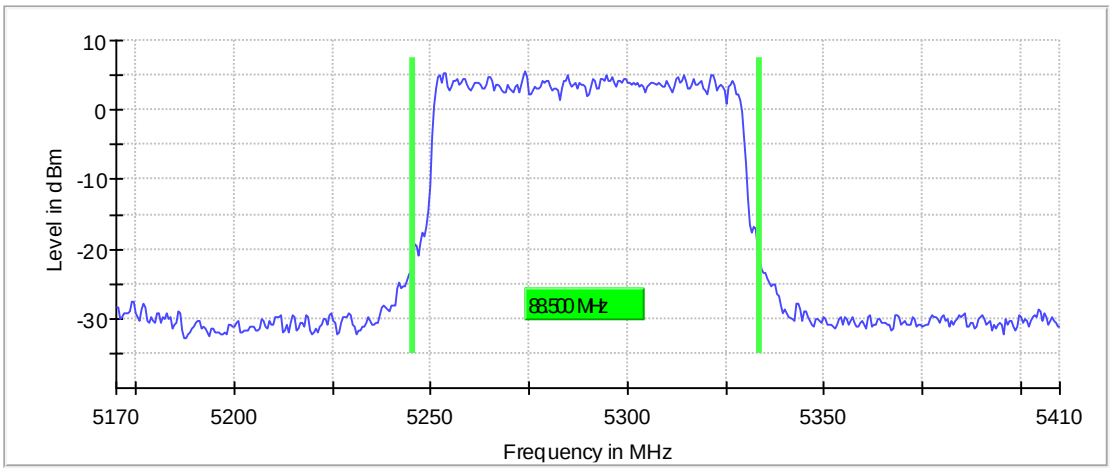

Bandwidth

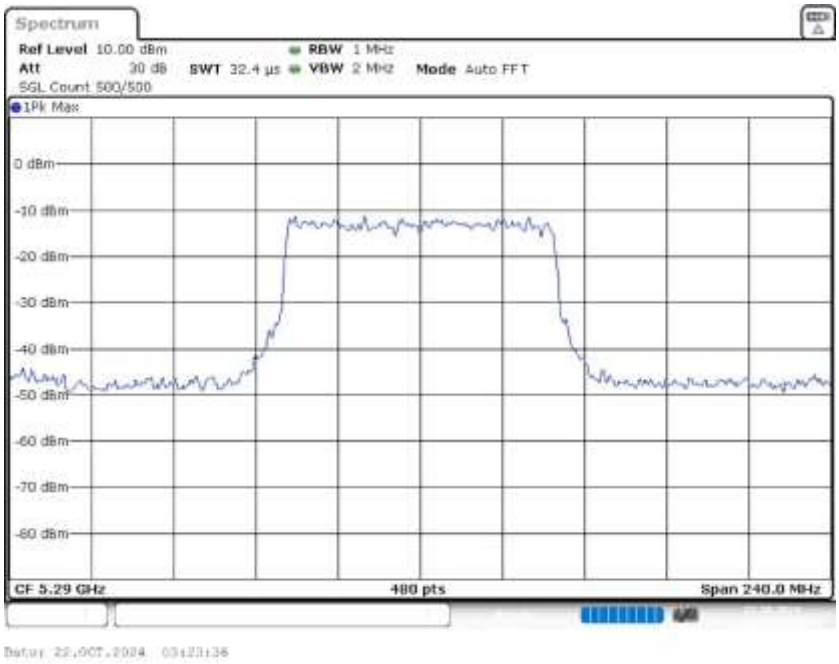

Power Spectral Density (5290 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5290.000000	5307.750000	-1.078	11.0	PASS

Ports

Port	State
1	used
2	used

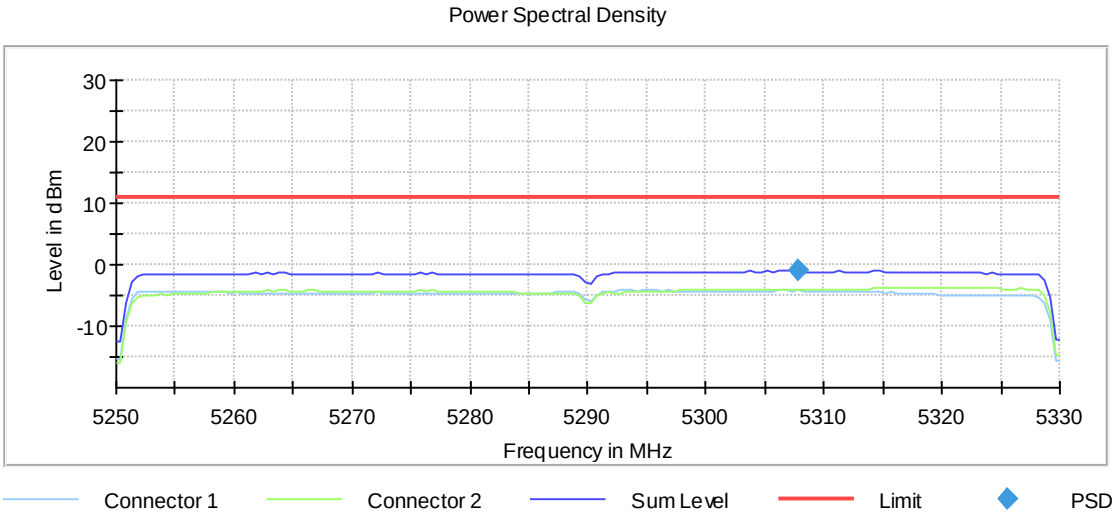

Occupied Channel Bandwidth 99% (5290 MHz; 24.000 dBm; 80 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	79.000000	---	---	5250.500000	5329.500000

DUT Frequency (MHz)	Result
5290.000000	PASS

99 % Bandwidth

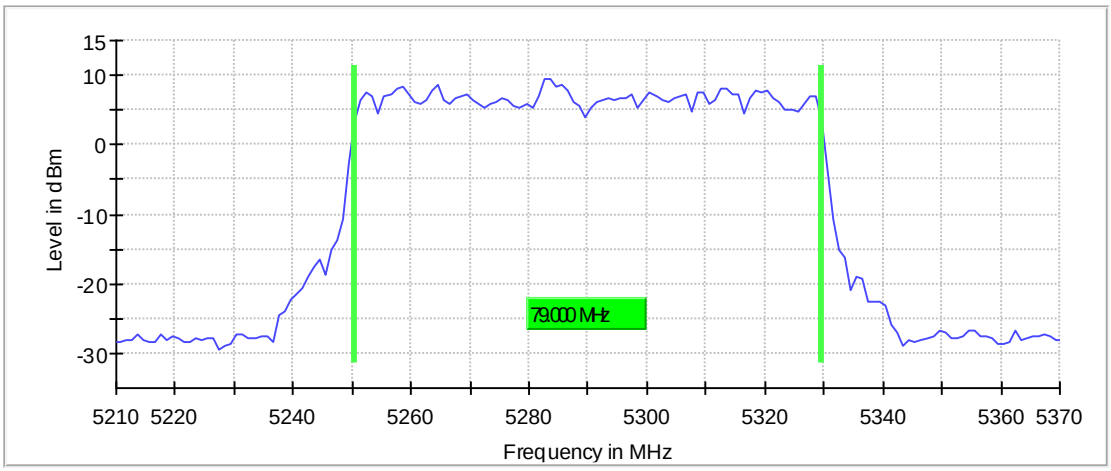

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.21000 GHz	5.21000 GHz
Stop Frequency	5.37000 GHz	5.37000 GHz
Span	160.000 MHz	160.000 MHz
RBW	2.000 MHz	>= 2.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	160	~ 160

Sweeptime	**16.875 µs**	**AUTO**
Reference Level	**10.000 dBm**	**10.000 dBm**
Attenuation	**30.000 dB**	**AUTO**
Detector	**MaxPeak**	**MaxPeak**
SweepCount	**500**	**500**
Filter	**3 dB**	**3 dB**
Trace Mode	**Max Hold**	**Max Hold**
Sweeptype	**FFT**	**AUTO**
Preamp	**off**	**off**

Emission Bandwidth 26 dB (5250 MHz; 24.000 dBm; 160 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5250.000000	**172.000000**	**---**	**---**	**5164.500000**	**5336.500000**

DUT Frequency (MHz)	Max Level (dBm)	Result
5250.000000	**7.6**	**PASS**

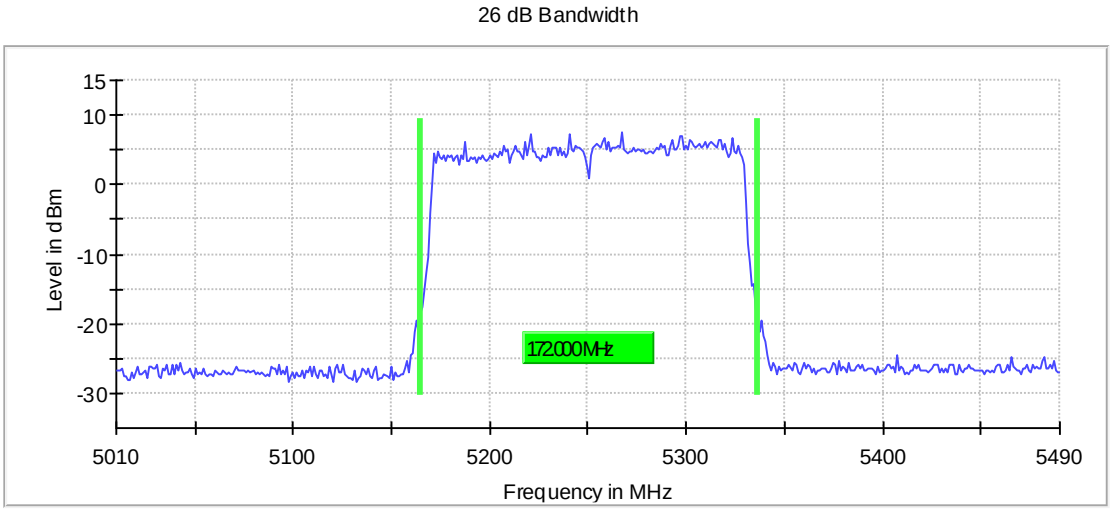

Bandwidth

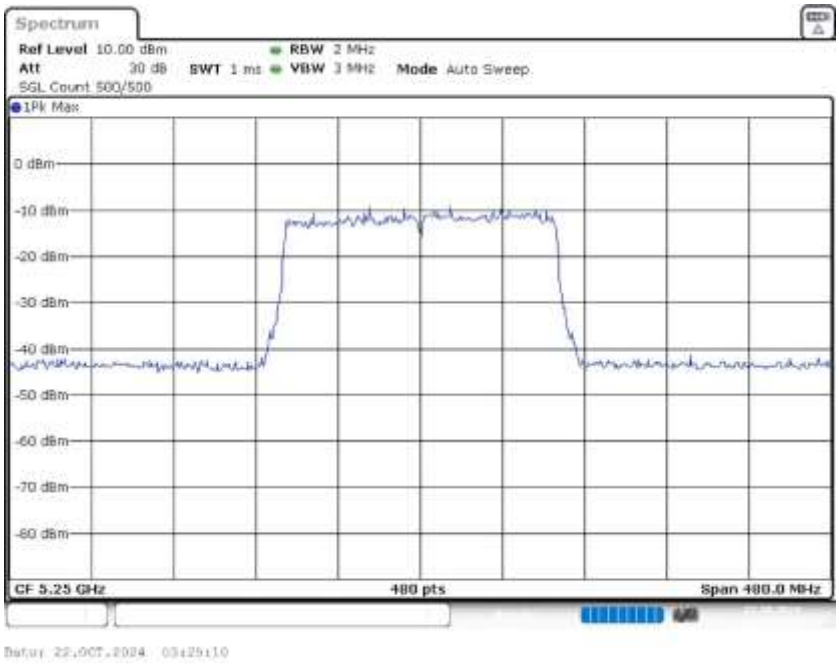

Power Spectral Density (5250 MHz; 24.000 dBm; 160 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5250.000000	5312.750000	-3.526	11.0	PASS

Ports

Port	State
1	used
2	used

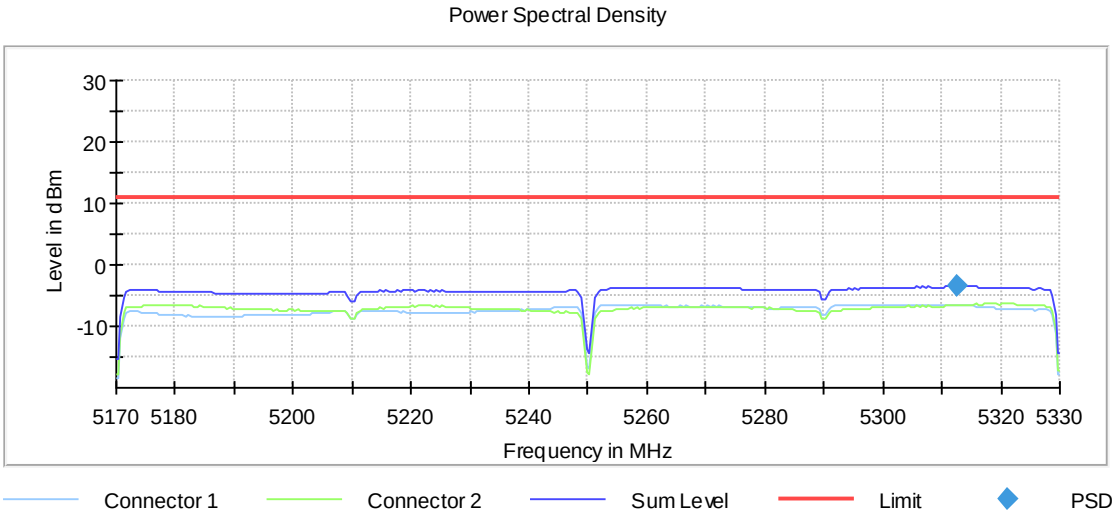

Occupied Channel Bandwidth 99% (5250 MHz; 24.000 dBm; 160 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5250.000000	157.000000	---	---	5171.500000	5328.500000

DUT Frequency (MHz)	Result
5250.000000	PASS

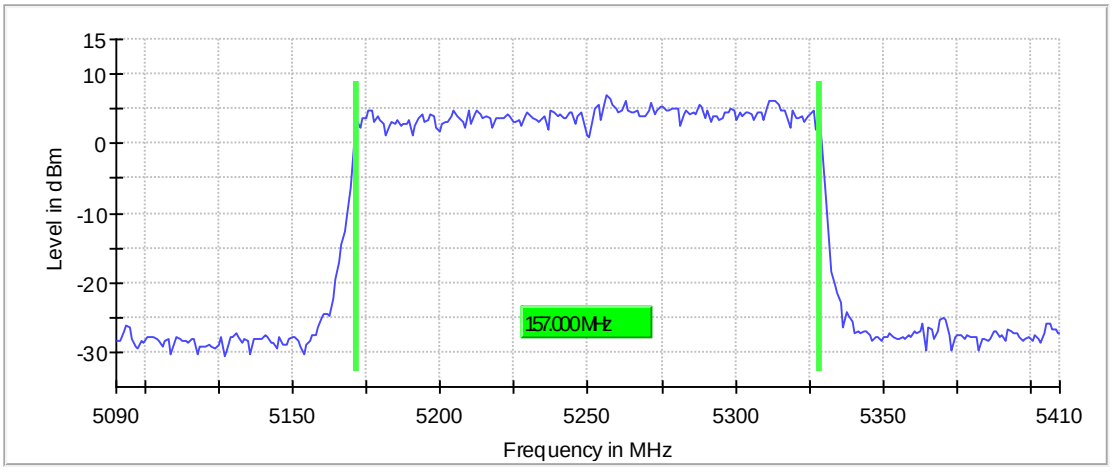

Bandwidth

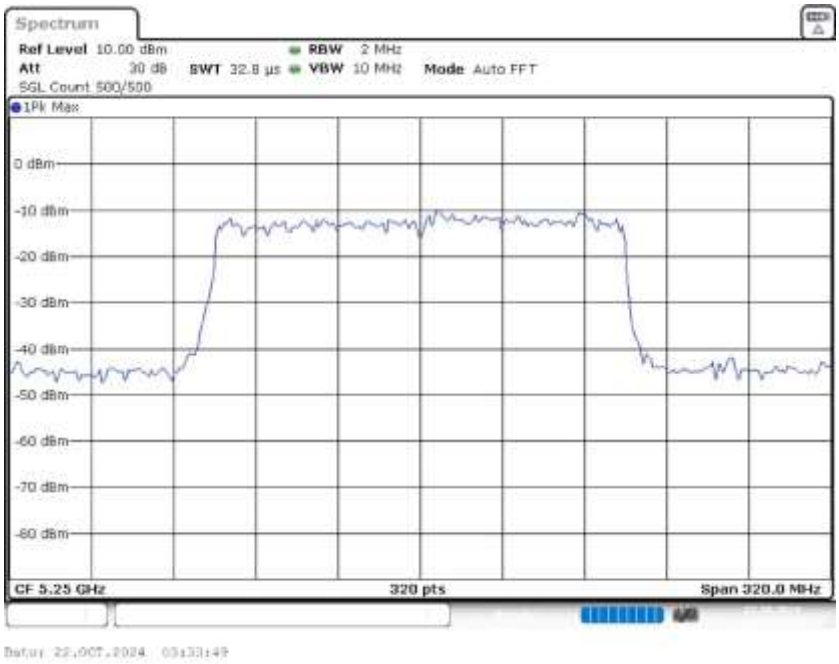

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.09000 GHz	5.09000 GHz
Stop Frequency	5.41000 GHz	5.41000 GHz
Span	320.000 MHz	320.000 MHz
RBW	2.000 MHz	>= 1.600 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	320	~ 320
Sweeptime	32.813 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

3 UNII-2A External Antenna

3.1 OFDM Mode

3.1.1 Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5260.000	20.000000	PASS
RF output power	5260.000	20.000000	PASS
Power Spectral Density	5260.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5260.000	20.000000	PASS
Emission Bandwidth 26 dB	5280.000	20.000000	PASS
Power Spectral Density	5280.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5280.000	20.000000	PASS
Emission Bandwidth 26 dB	5320.000	20.000000	PASS
Power Spectral Density	5320.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5320.000	20.000000	PASS

Emission Bandwidth 26 dB (5260 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	19.900000	---	---	5250.050000	5269.950000

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	7.5	PASS

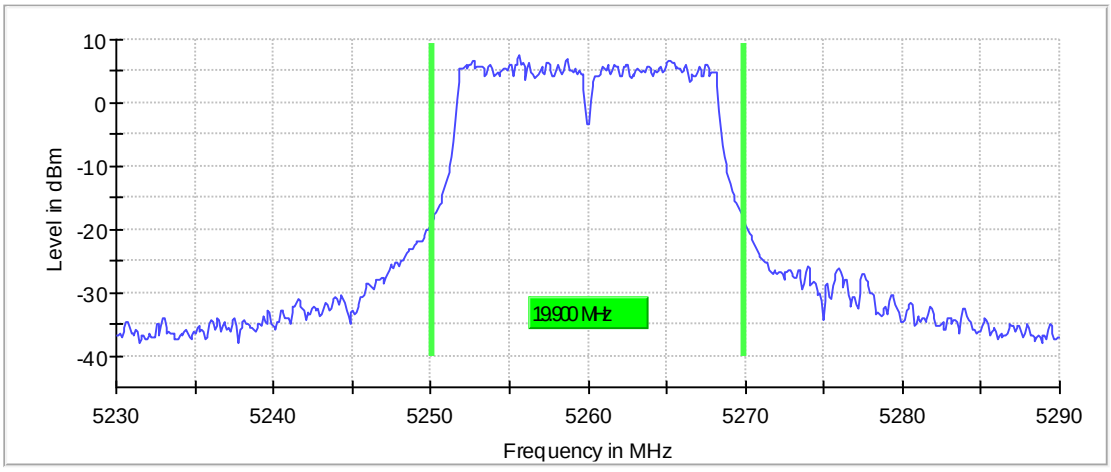

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	300.000 kHz	>= 240.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	20.7	24.0	20.7	97.162	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000

Time resolution	1.000 µs	1.000 µs

Power Spectral Density (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5260.000000	5261.584158	8.301	11.0	PASS

Ports

Port	State
1	used
2	used

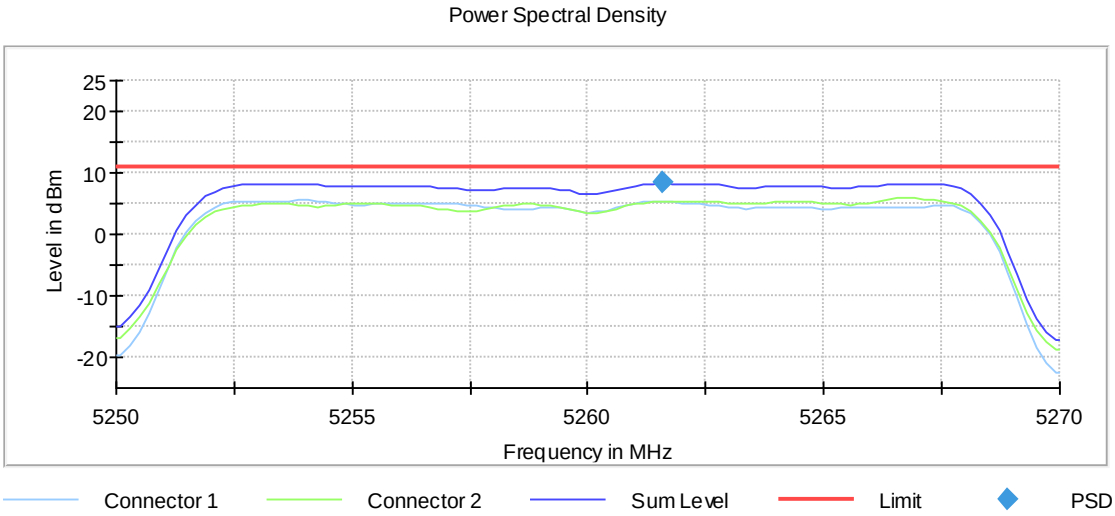

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.25000 GHz	5.25000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	3.788 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5260 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	16.500000	---	---	5251.750000	5268.250000

DUT Frequency (MHz)	Result
5260.000000	PASS

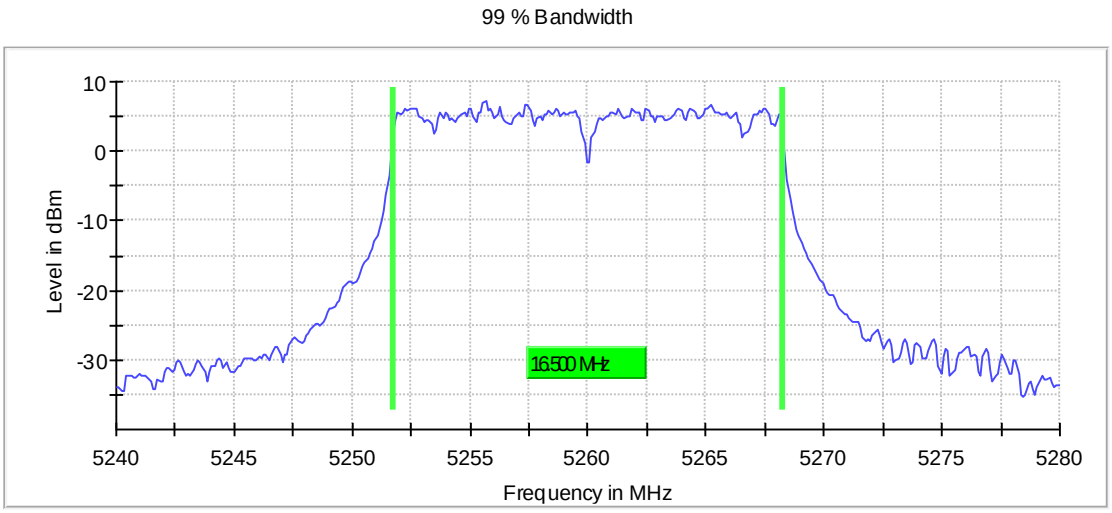

Bandwidth

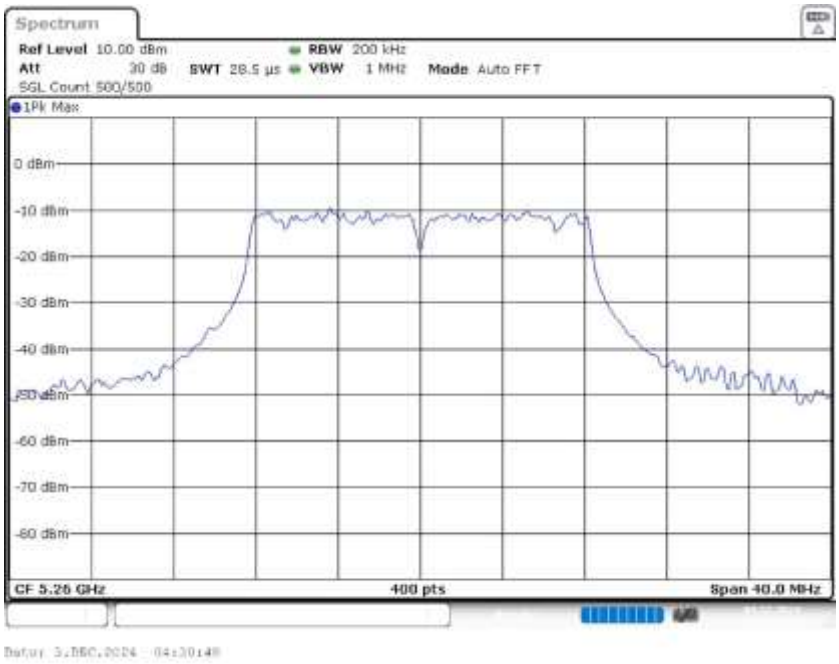

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.24000 GHz	5.24000 GHz
Stop Frequency	5.28000 GHz	5.28000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5280 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	20.100000	---	---	5270.150000	5290.250000

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	6.6	PASS

26 dB Bandwidth

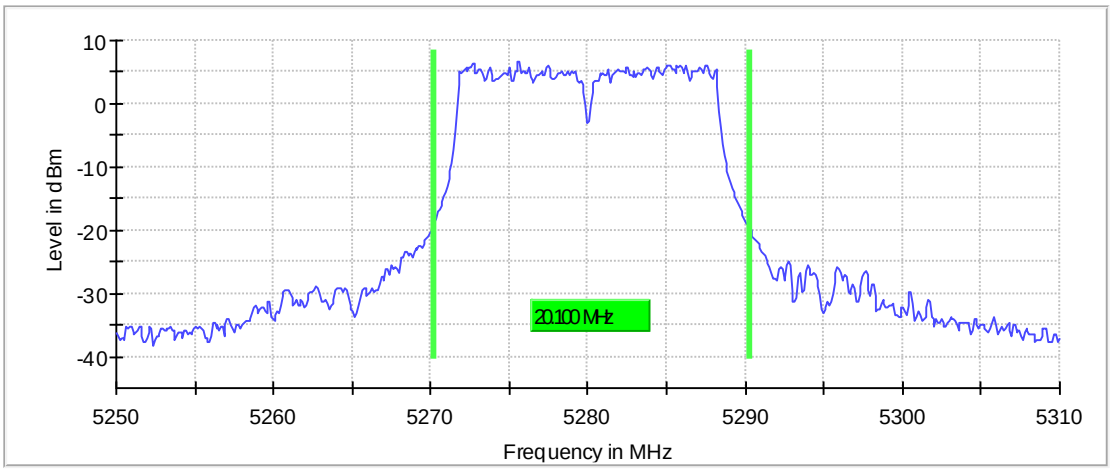

Bandwidth

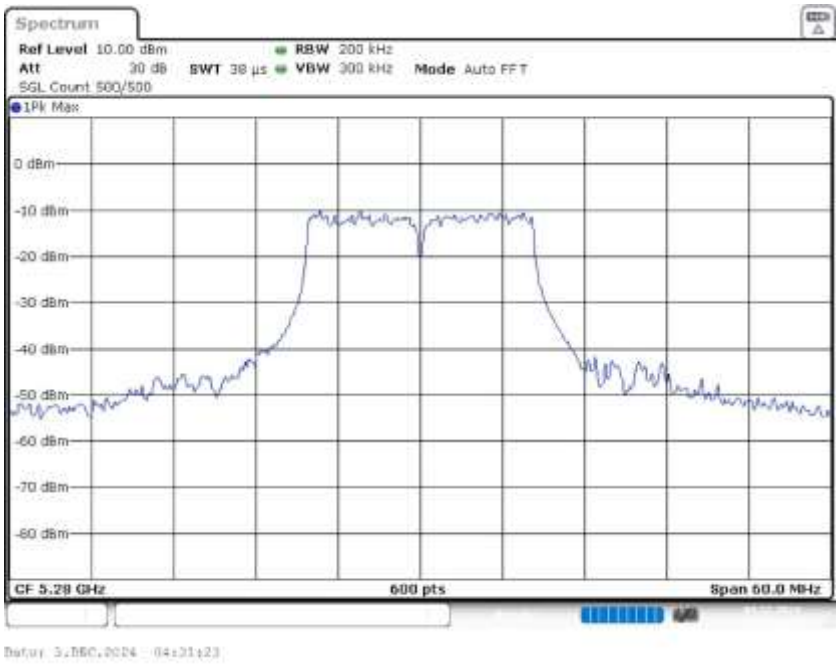

Power Spectral Density (5280 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5280.000000	5272.871287	8.446	11.0	PASS

Ports

Port	State
1	used
2	used

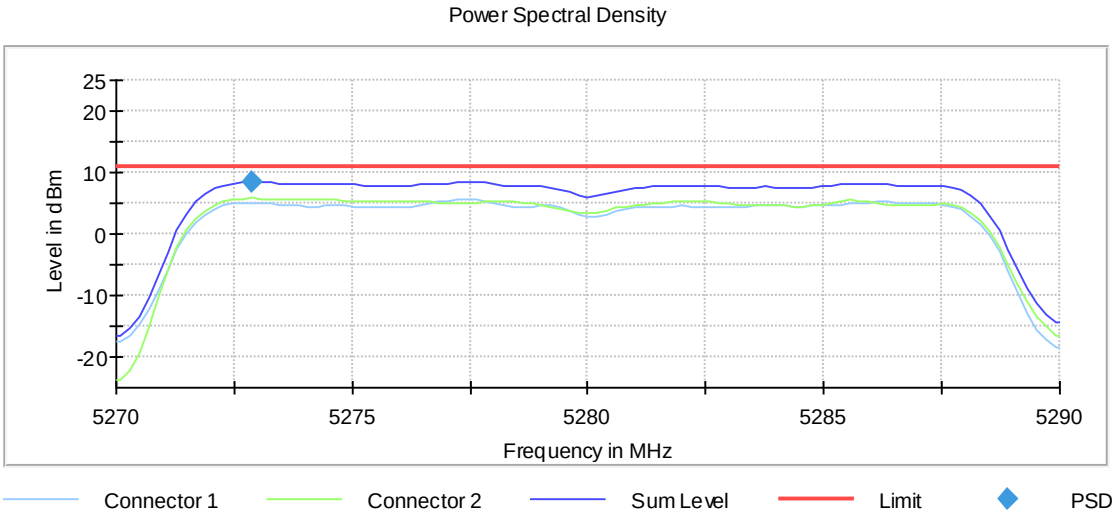

Occupied Channel Bandwidth 99% (5280 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	16.600000	---	---	5271.650000	5288.250000

DUT Frequency (MHz)	Result
5280.000000	PASS

99 % Bandwidth

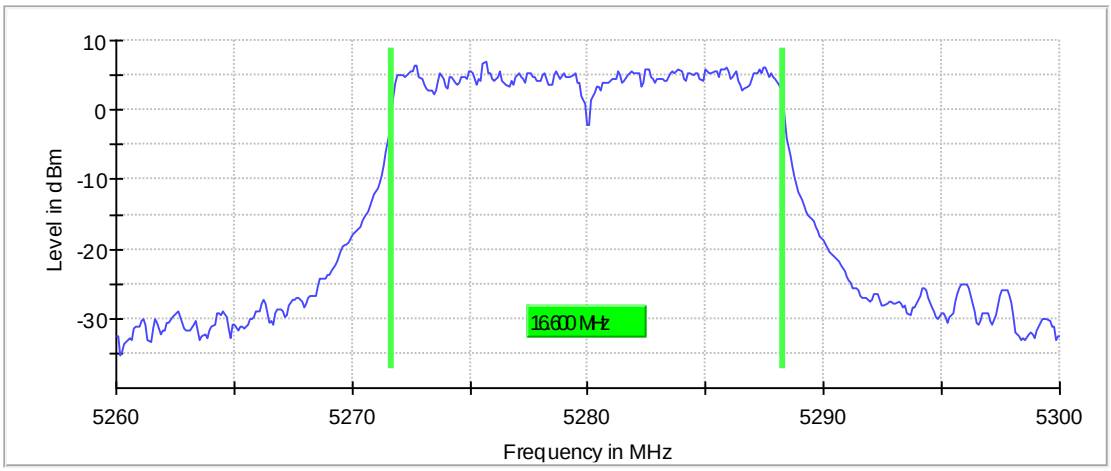

Bandwidth

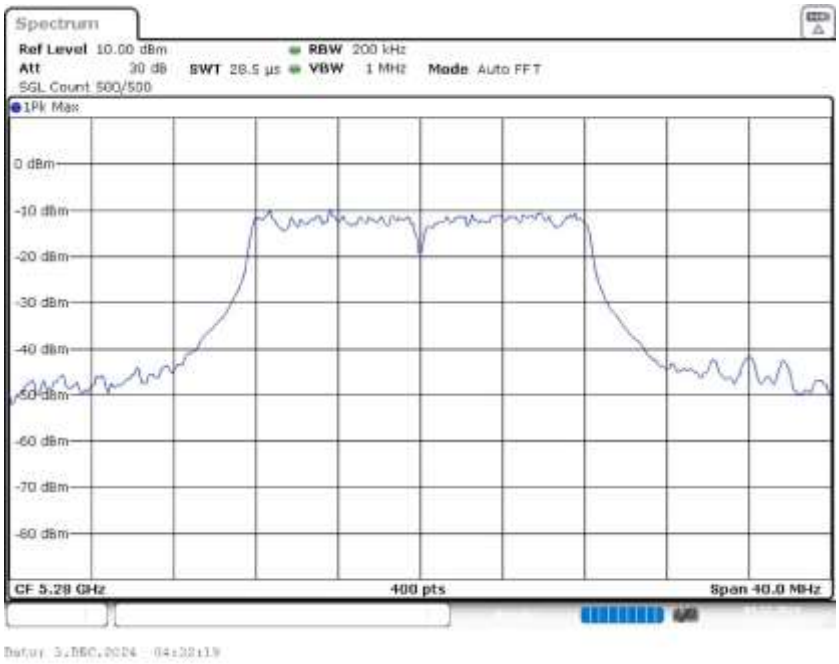

Emission Bandwidth 26 dB (5320 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	19.900000	---	---	5309.950000	5329.850000

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	6.9	PASS

26 dB Bandwidth

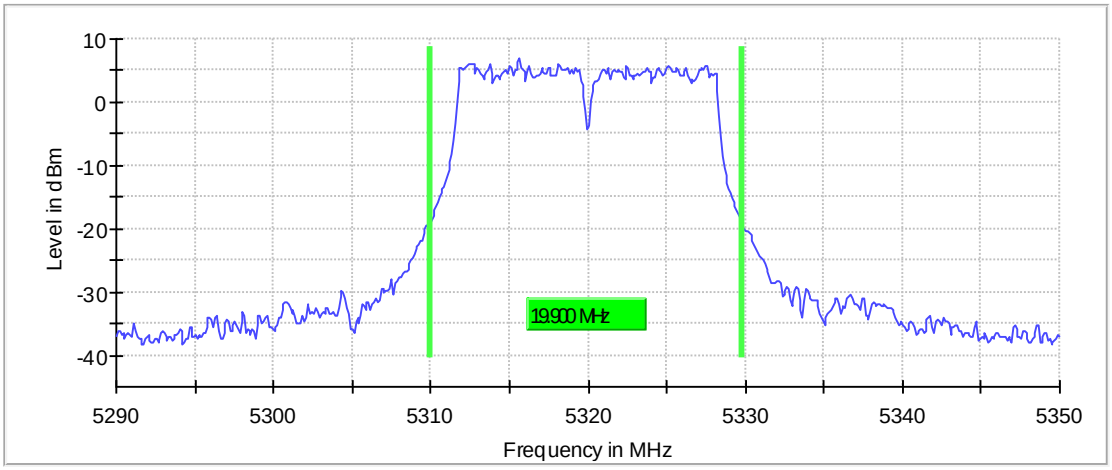

Bandwidth

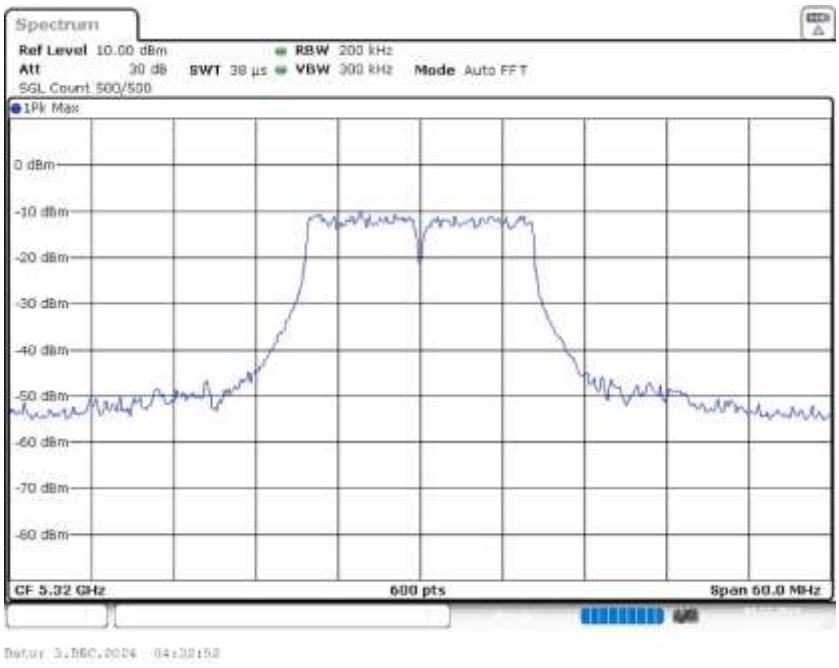

Power Spectral Density (5320 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5320.000000	5326.930693	8.720	11.0	PASS

Ports

Port	State
1	used
2	used

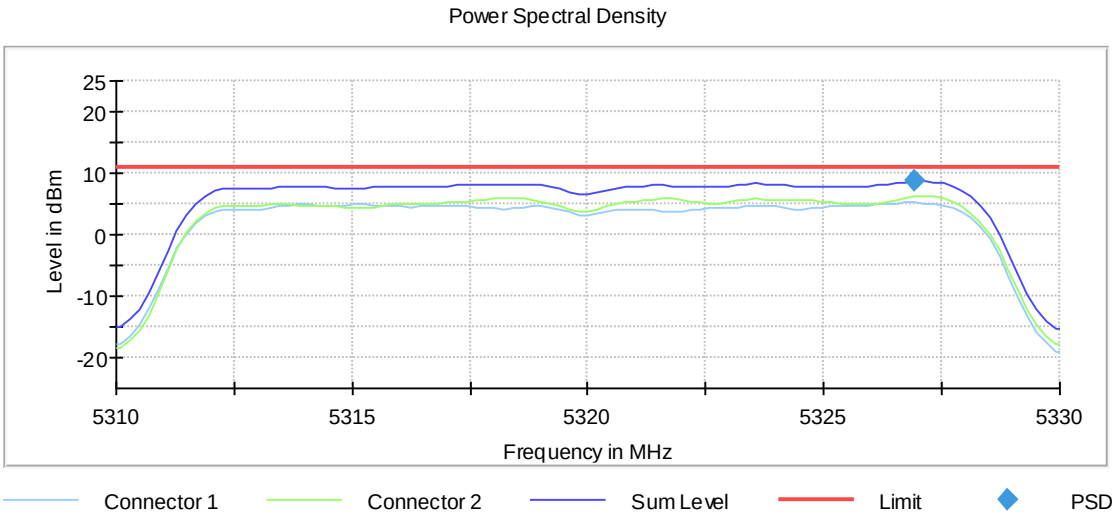

Occupied Channel Bandwidth 99% (5320 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	16.600000	---	---	5311.650000	5328.250000

DUT Frequency (MHz)	Result
5320.000000	PASS

99 % Bandwidth

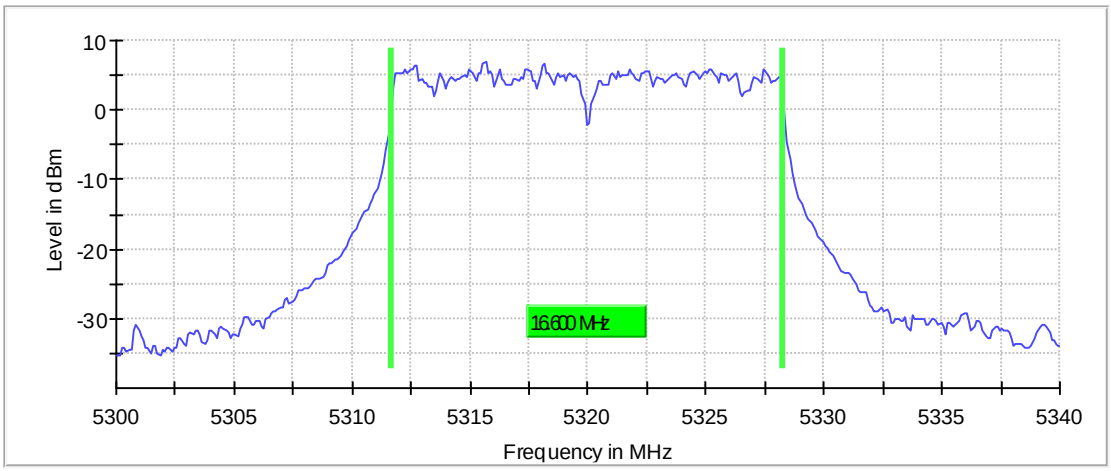

Bandwidth

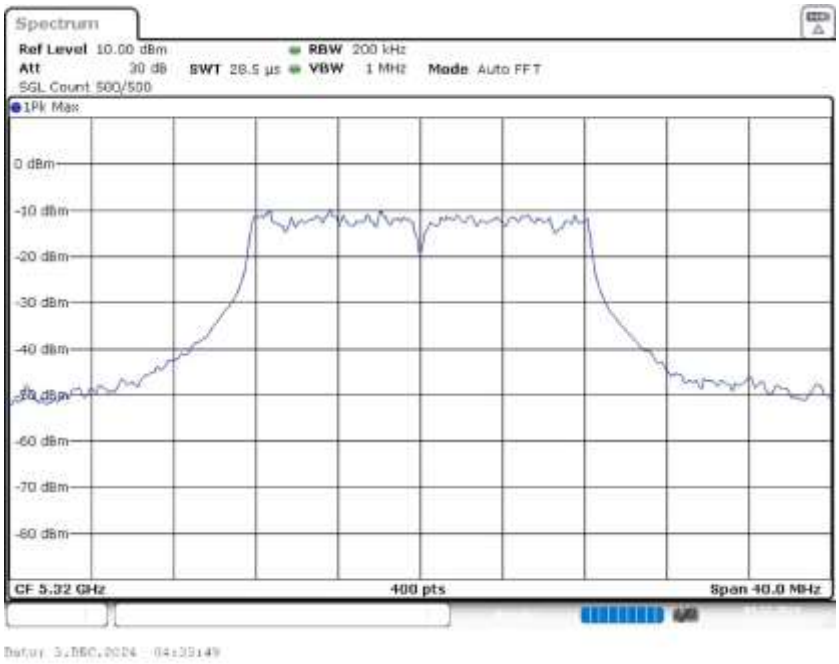

3.2 HE Mode

3.2.1 Summary

Test	Frequency (MHz)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5260.000	20.000000	PASS
RF output power	5260.000	20.000000	PASS
Power Spectral Density	5260.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5260.000	20.000000	PASS
Emission Bandwidth 26 dB	5280.000	20.000000	PASS
Power Spectral Density	5280.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5280.000	20.000000	PASS
Emission Bandwidth 26 dB	5320.000	20.000000	PASS
Power Spectral Density	5320.000	20.000000	PASS
Occupied Channel Bandwidth 99%	5320.000	20.000000	PASS
Emission Bandwidth 26 dB	5270.000	40.000000	PASS
Power Spectral Density	5270.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5270.000	40.000000	PASS
Emission Bandwidth 26 dB	5310.000	40.000000	PASS
Power Spectral Density	5310.000	40.000000	PASS
Occupied Channel Bandwidth 99%	5310.000	40.000000	PASS
Emission Bandwidth 26 dB	5290.000	80.000000	PASS
Power Spectral Density	5290.000	80.000000	PASS
Occupied Channel Bandwidth 99%	5290.000	80.000000	PASS
Emission Bandwidth 26 dB	5250.000	160.000000	PASS
Power Spectral Density	5250.000	160.000000	PASS
Occupied Channel Bandwidth 99%	5250.000	160.000000	PASS

Emission Bandwidth 26 dB (5260 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	22.000000	---	---	5249.050000	5271.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	8.7	PASS

26 dB Bandwidth

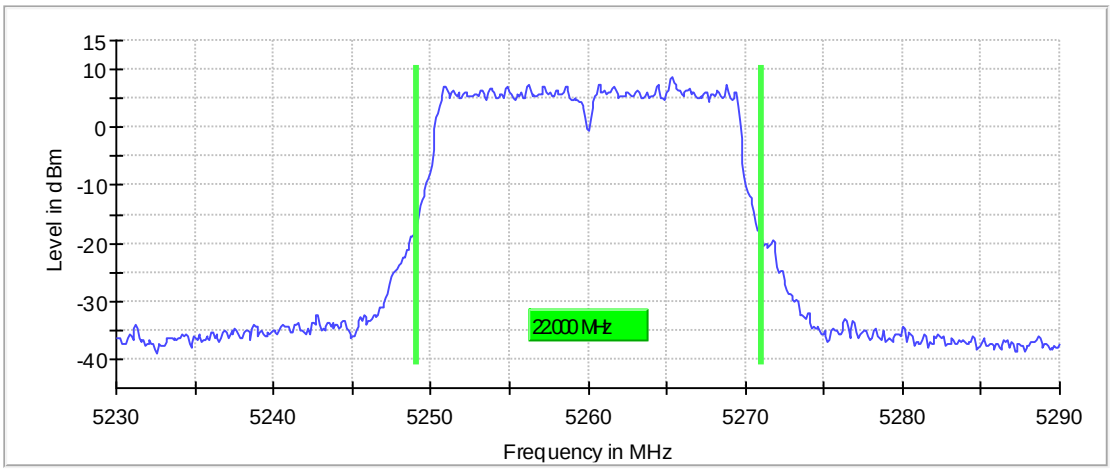

Bandwidth

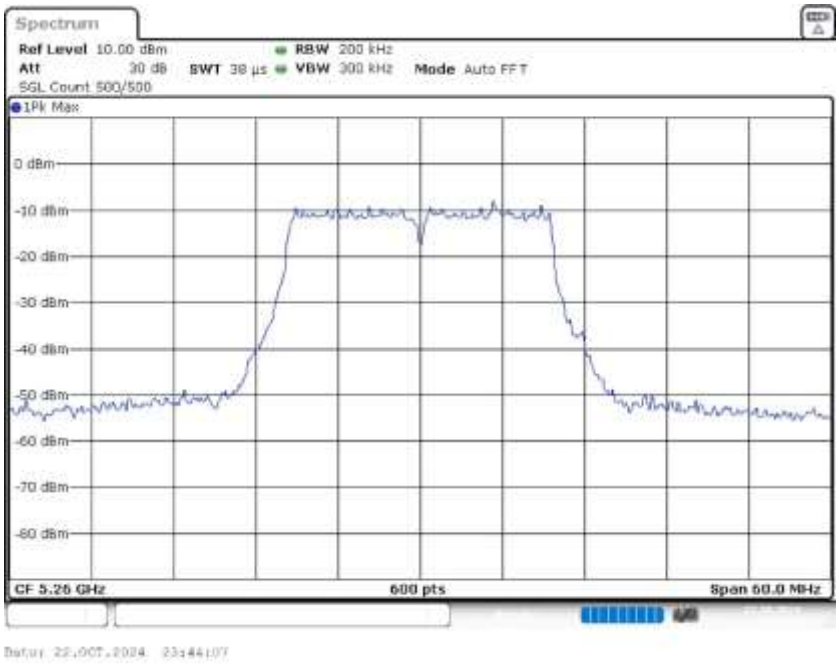

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.29000 GHz	5.29000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	300.000 kHz	>= 240.000 kHz
SweepPoints	600	~ 600

Sweeptime	37.969 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5260.000000	21.6	24.0	21.6	99.716	PASS

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

Power Spectral Density (5260 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5260.000000	5268.118812	8.424	11.0	PASS

Ports

Port	State
1	used
2	used

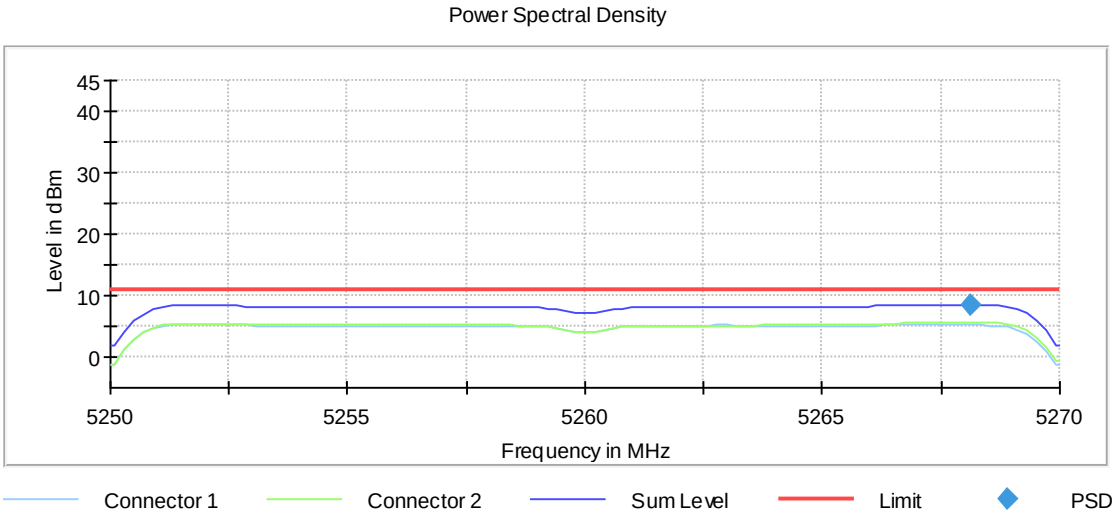

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.25000 GHz	5.25000 GHz
Stop Frequency	5.27000 GHz	5.27000 GHz
Span	20.000 MHz	20.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 40
Sweeptime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Power	Average Power
Sweeptype	FFT	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5260 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	19.250000	---	---	5250.375000	5269.625000

DUT Frequency (MHz)	Result
5260.000000	PASS

99 % Bandwidth

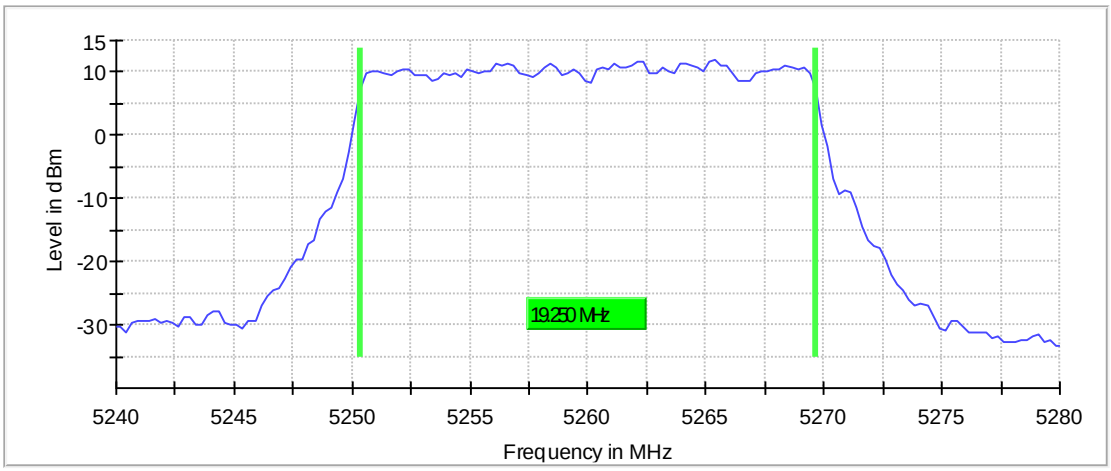

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.24000 GHz	5.24000 GHz
Stop Frequency	5.28000 GHz	5.28000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160

Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5280 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	22.600000	---	---	5268.650000	5291.250000

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	7.6	PASS

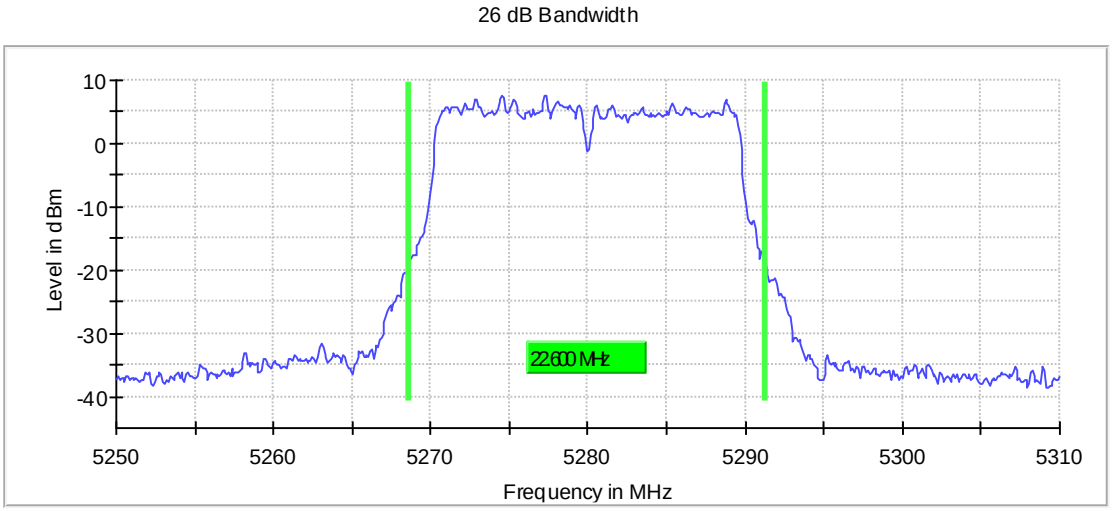

Bandwidth

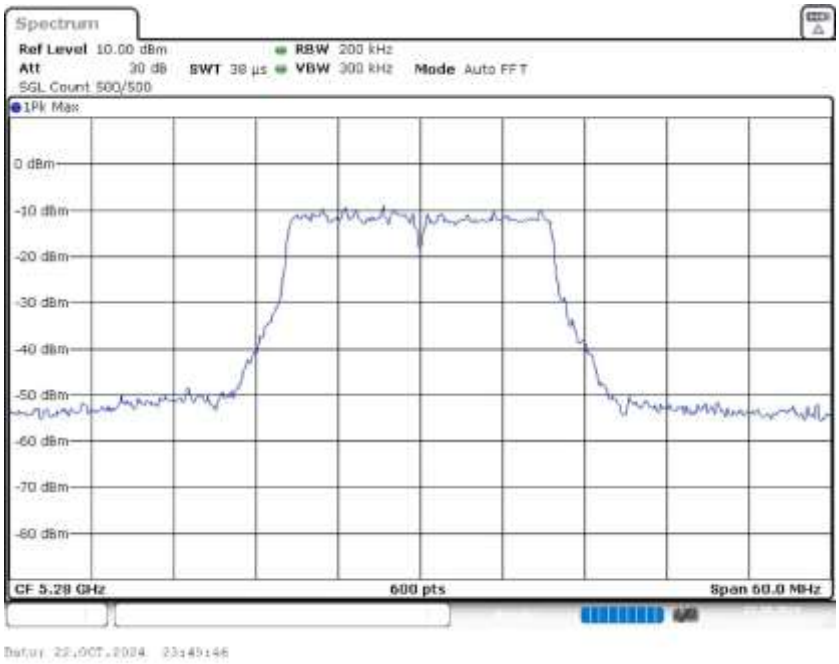

Power Spectral Density (5280 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5280.000000	5271.683168	8.346	11.0	PASS

Ports

Port	State
1	used
2	used

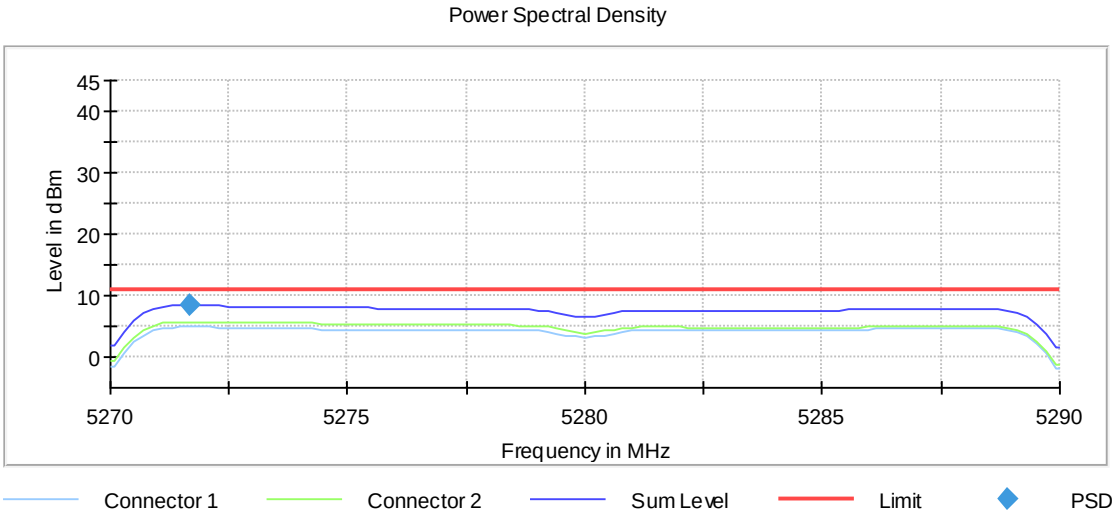

Occupied Channel Bandwidth 99% (5280 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	19.250000	---	---	5270.375000	5289.625000

DUT Frequency (MHz)	Result
5280.000000	PASS

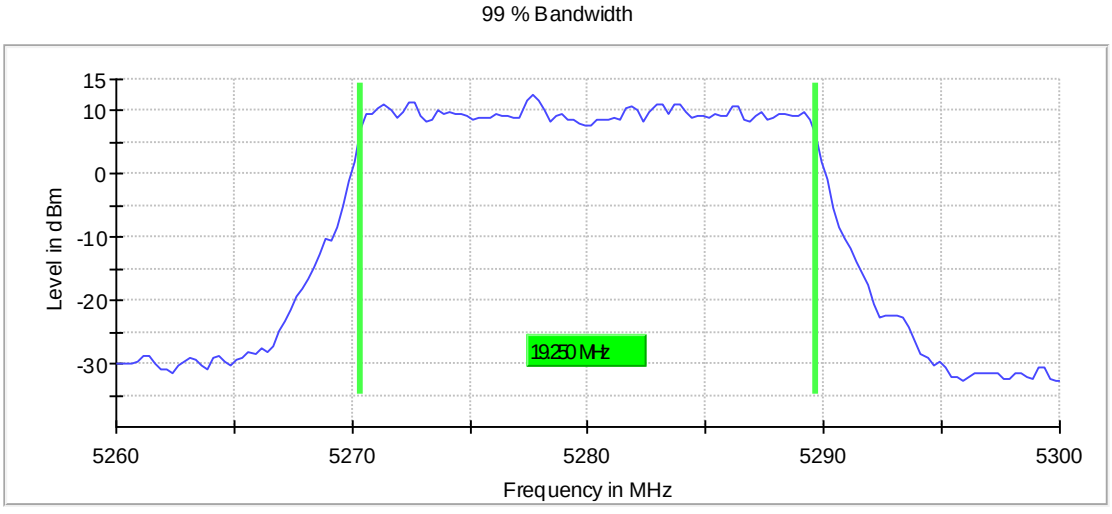

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.26000 GHz	5.26000 GHz
Stop Frequency	5.30000 GHz	5.30000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5320 MHz; 24.000 dBm; 20 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	22.100000	---	---	5308.950000	5331.050000

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	6.5	PASS

26 dB Bandwidth

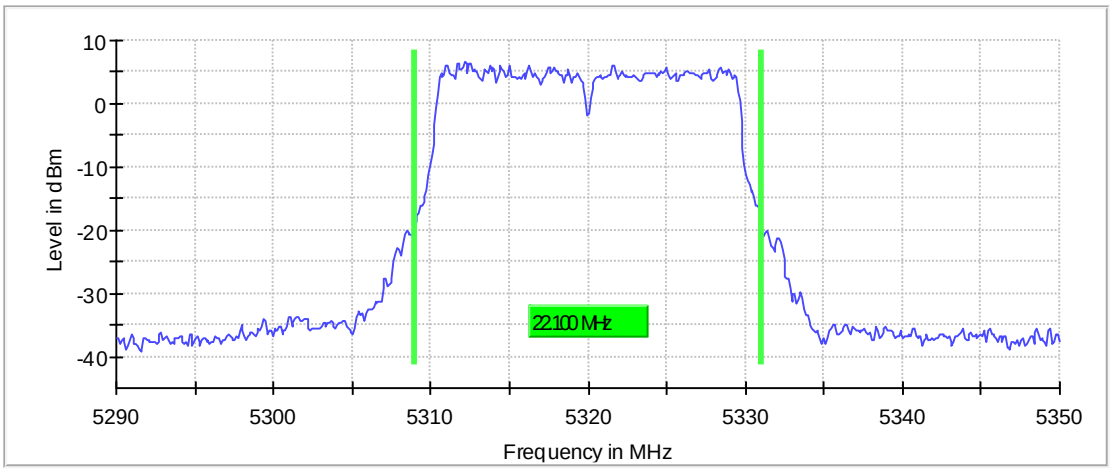

Bandwidth

Power Spectral Density (5320 MHz; 24.000 dBm; 20 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5320.000000	5311.683168	7.965	11.0	PASS

Ports

Port	State
1	used
2	used

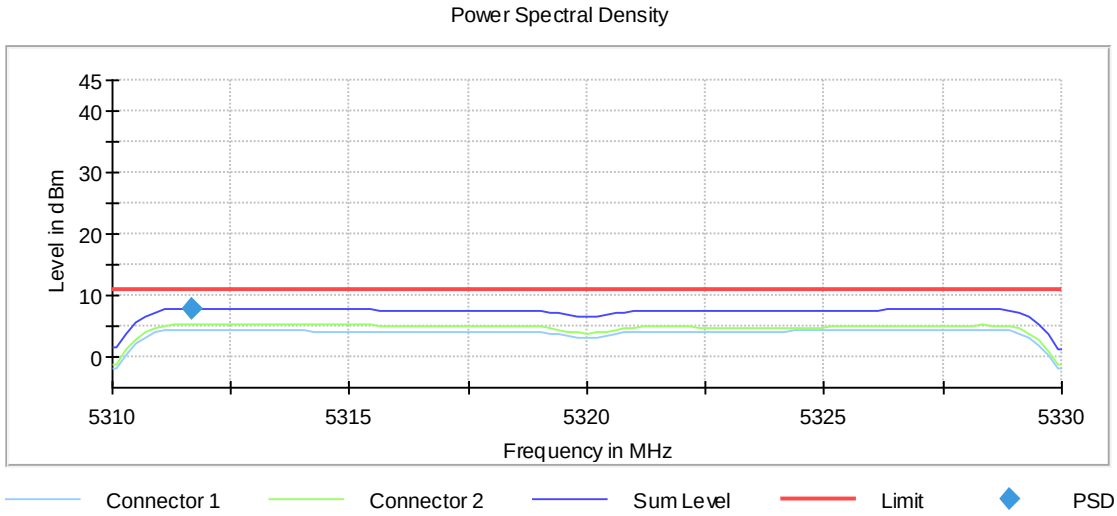

Occupied Channel Bandwidth 99% (5320 MHz; 24.000 dBm; 20 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	19.500000	---	---	5310.125000	5329.625000

DUT Frequency (MHz)	Result
5320.000000	PASS

99 % Bandwidth

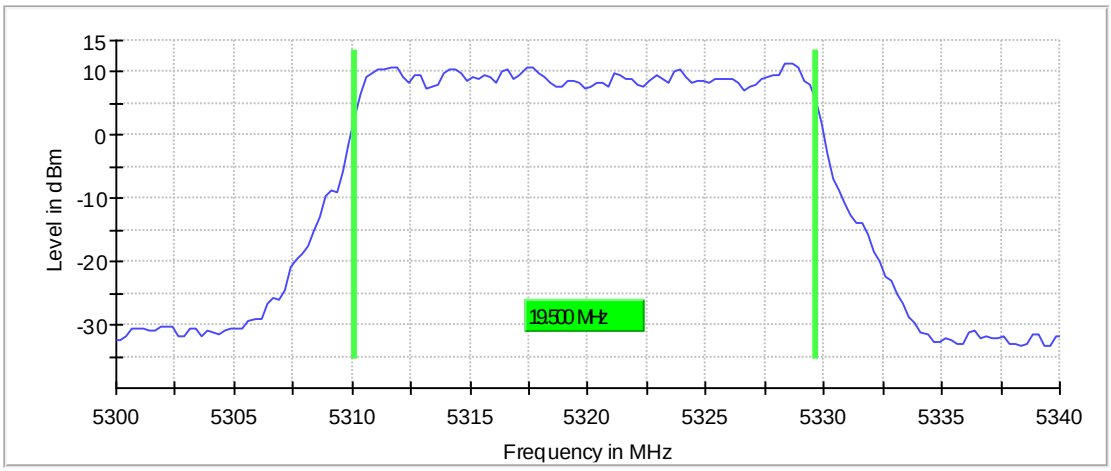

Bandwidth

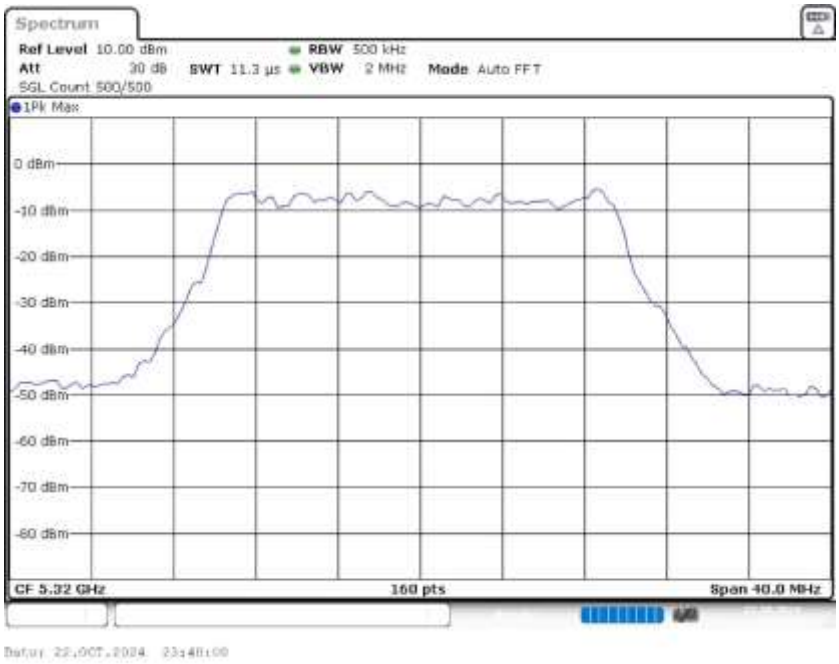

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.30000 GHz	5.30000 GHz
Stop Frequency	5.34000 GHz	5.34000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160

Sweeptime	11.344 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5270 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	42.150000	---	---	5248.625000	5290.775000

DUT Frequency (MHz)	Max Level (dBm)	Result
5270.000000	7.3	PASS

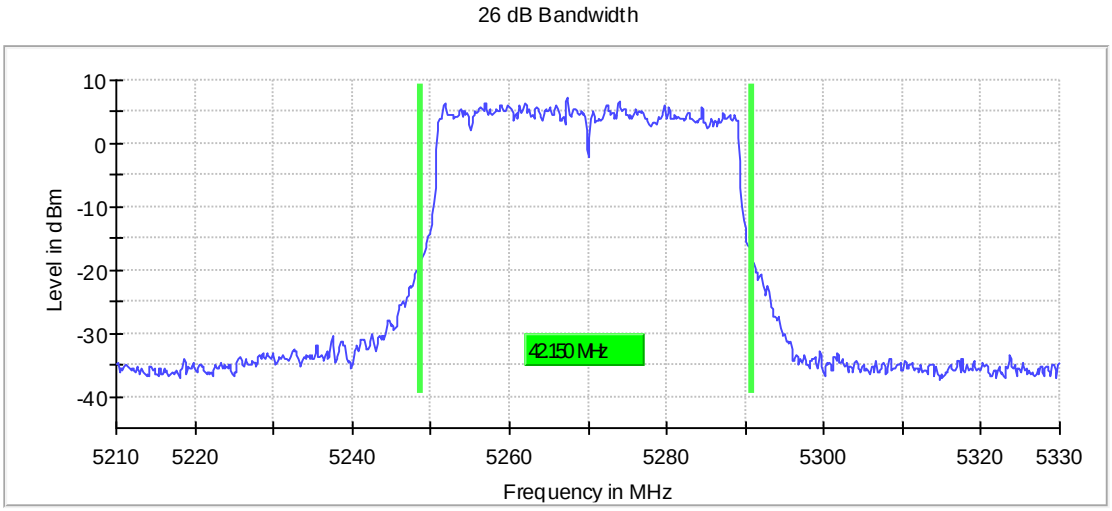

Bandwidth

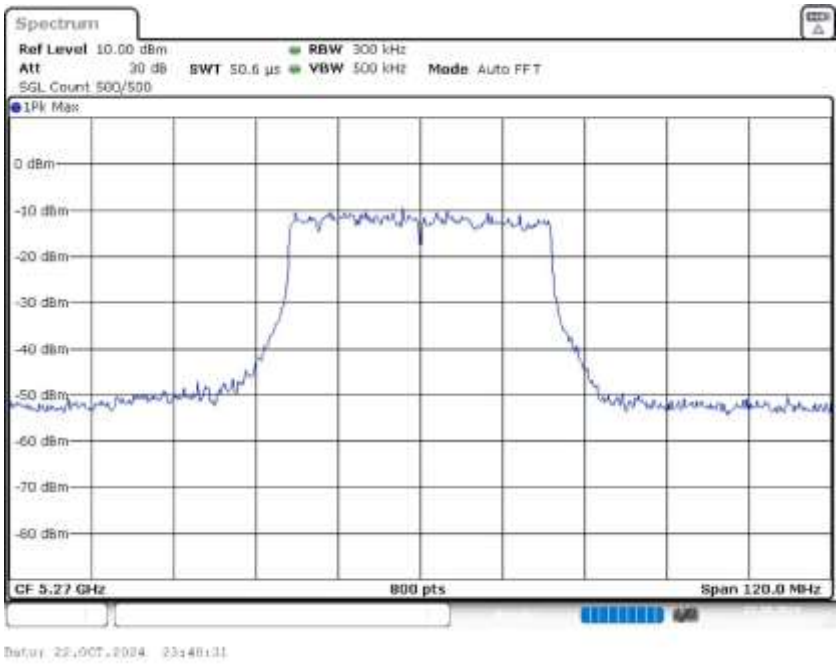

Power Spectral Density (5270 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5270.000000	5256.930693	5.442	11.0	PASS

Ports

Port	State
1	used
2	used

Power Spectral Density

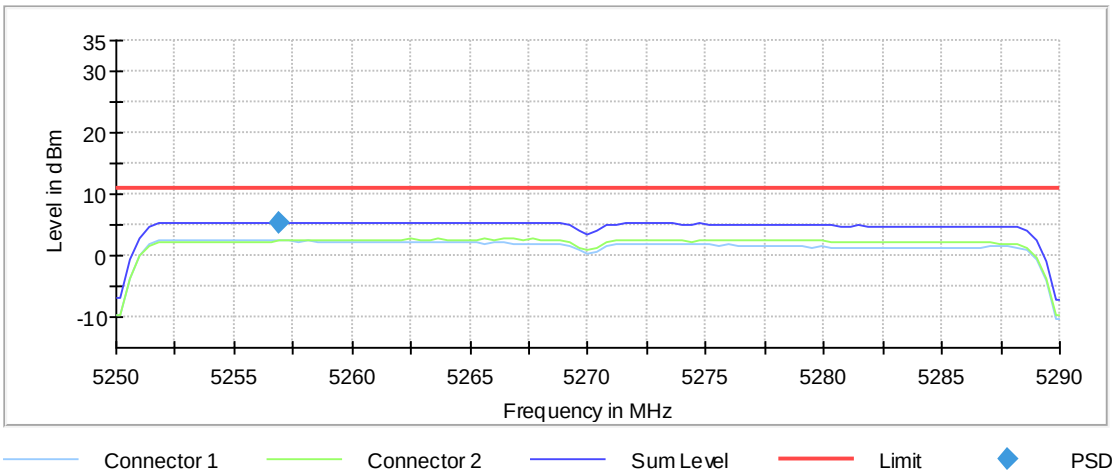

Occupied Channel Bandwidth 99% (5270 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	39.000000	---	---	5250.750000	5289.750000

DUT Frequency (MHz)	Result
5270.000000	PASS

99 % Bandwidth

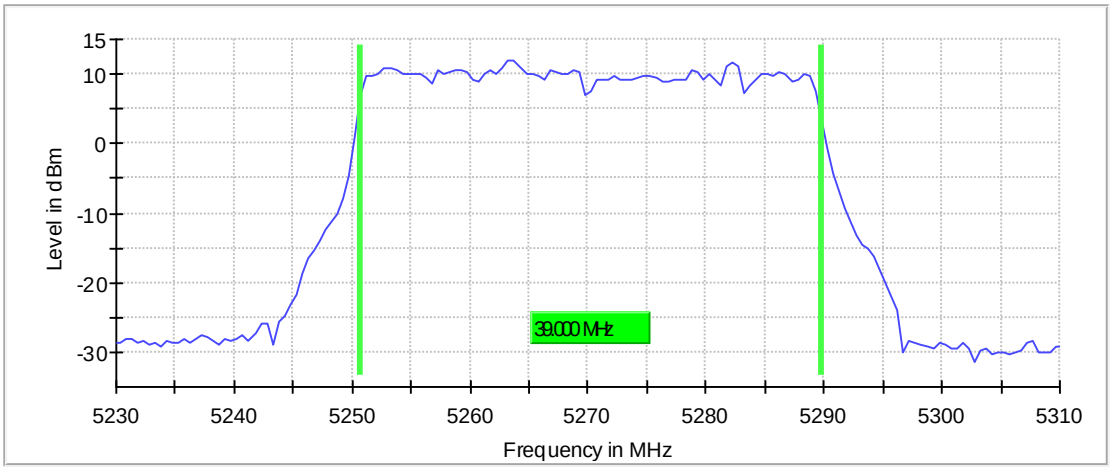

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.23000 GHz	5.23000 GHz
Stop Frequency	5.31000 GHz	5.31000 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
Sweeptime	11.438 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5310 MHz; 24.000 dBm; 40 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	42.900000	---	---	5288.325000	5331.225000

DUT Frequency (MHz)	Max Level (dBm)	Result
5310.000000	6.7	PASS

26 dB Bandwidth

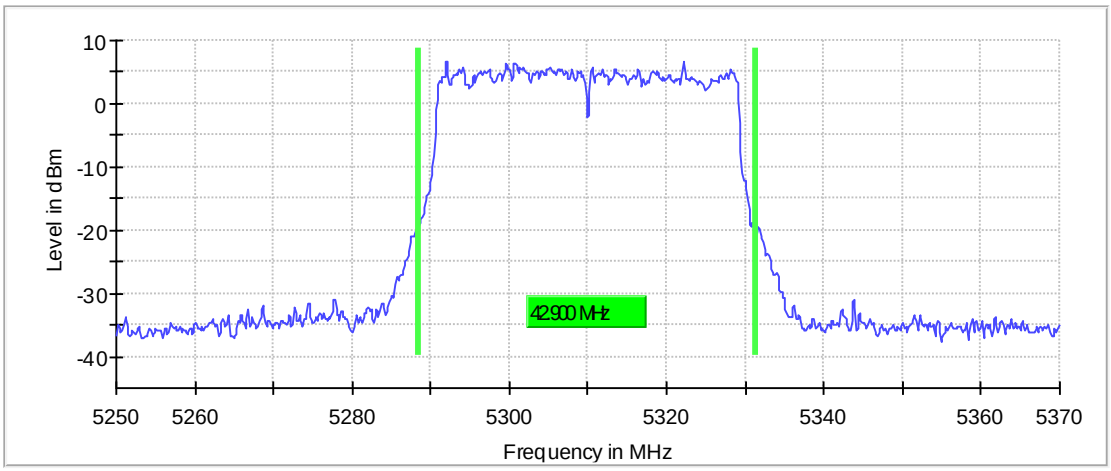

Bandwidth

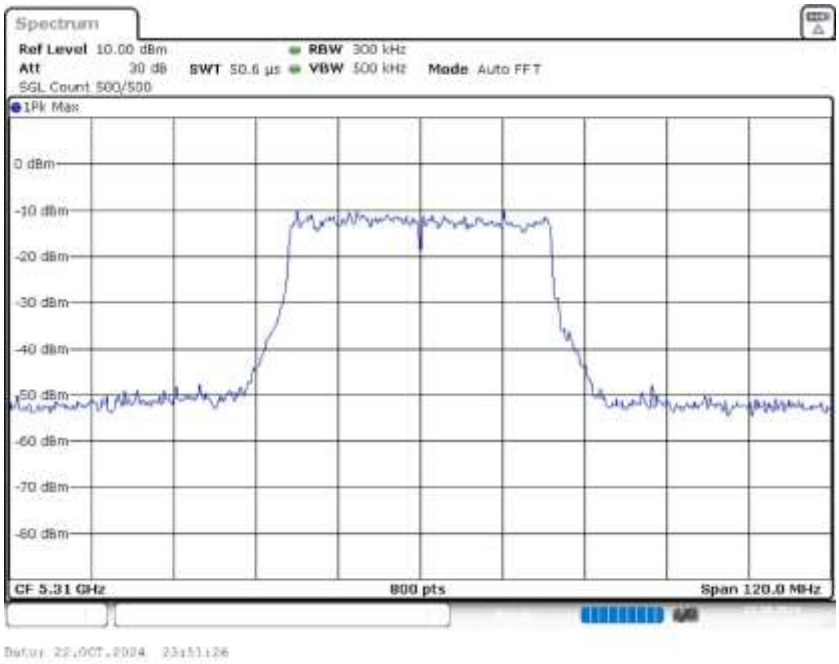

Power Spectral Density (5310 MHz; 24.000 dBm; 40 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5310.000000	5305.643564	5.155	11.0	PASS

Ports

Port	State
1	used
2	used

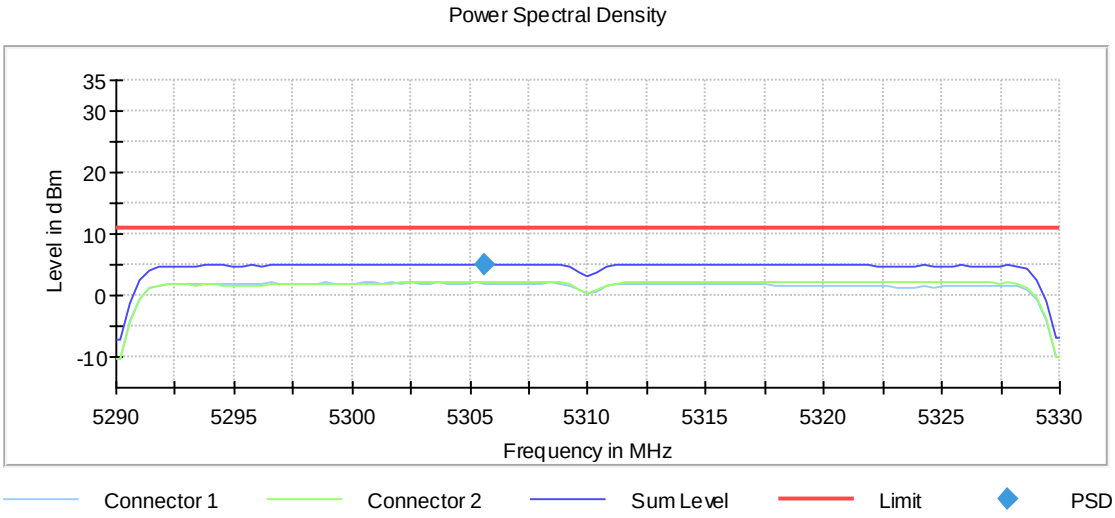

Occupied Channel Bandwidth 99% (5310 MHz; 24.000 dBm; 40 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	38.500000	---	---	5290.750000	5329.250000

DUT Frequency (MHz)	Result
5310.000000	PASS

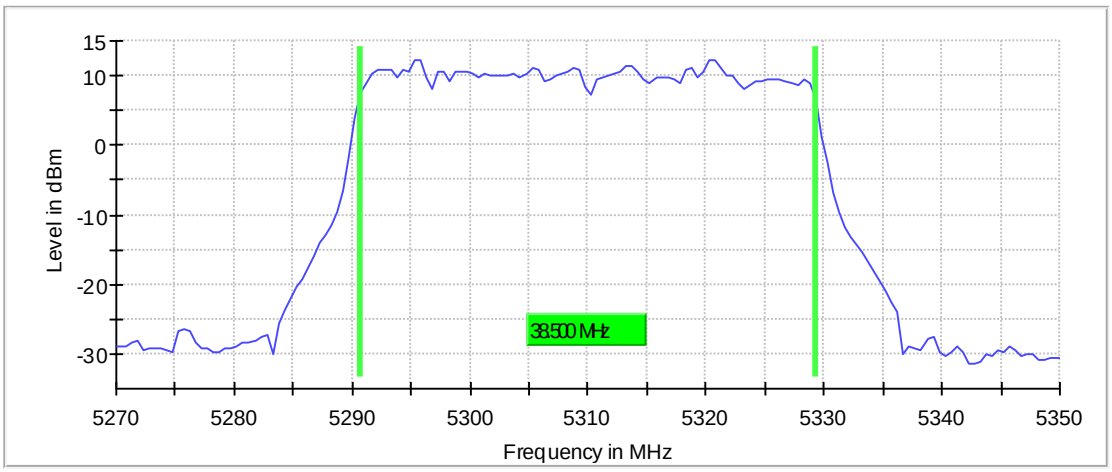

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.27000 GHz	5.27000 GHz
Stop Frequency	5.35000 GHz	5.35000 GHz
Span	80.000 MHz	80.000 MHz
RBW	1.000 MHz	>= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
Sweeptime	11.438 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5290 MHz; 24.000 dBm; 80 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	89.000000	---	---	5245.750000	5334.750000

DUT Frequency (MHz)	Max Level (dBm)	Result
5290.000000	9.0	PASS

26 dB Bandwidth

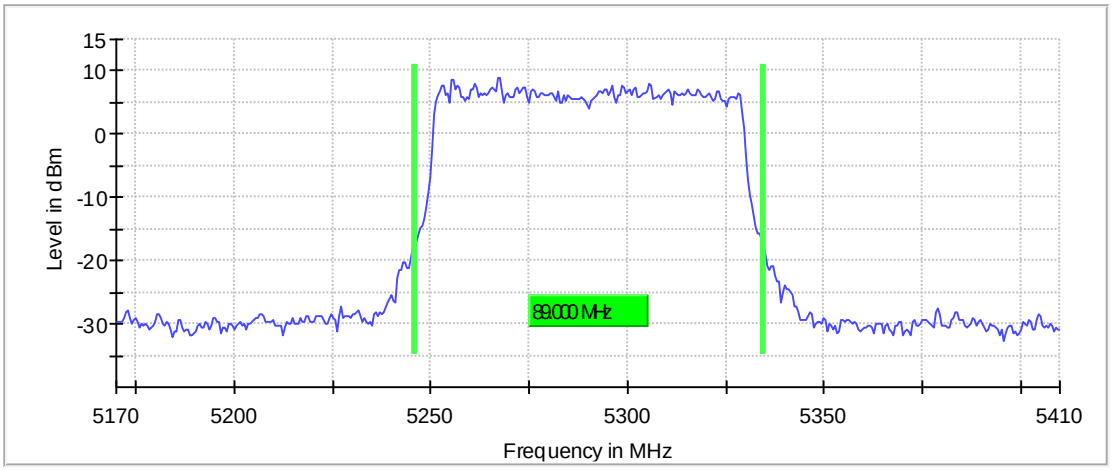

Bandwidth

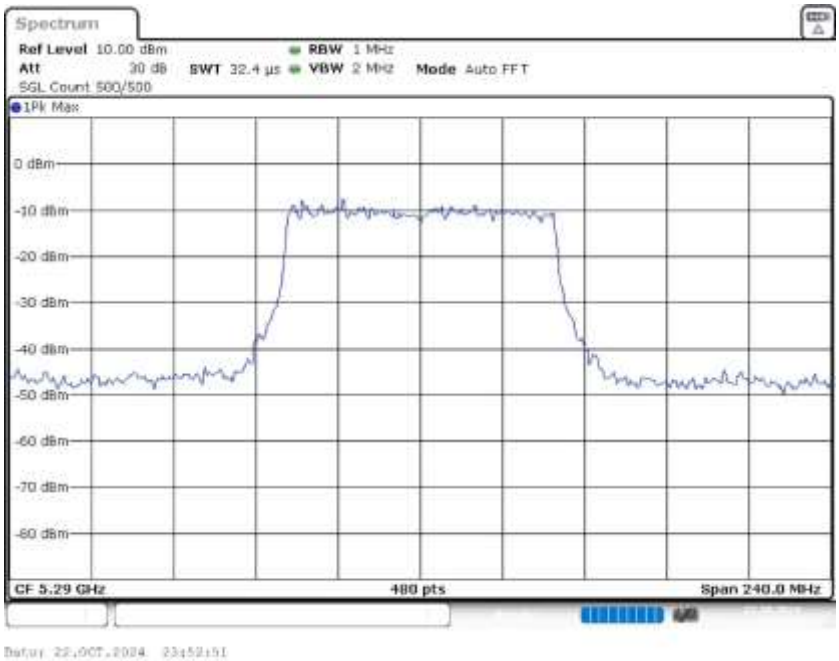

Power Spectral Density (5290 MHz; 24.000 dBm; 80 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5290.000000	5260.750000	2.003	11.0	PASS

Ports

Port	State
1	used
2	used

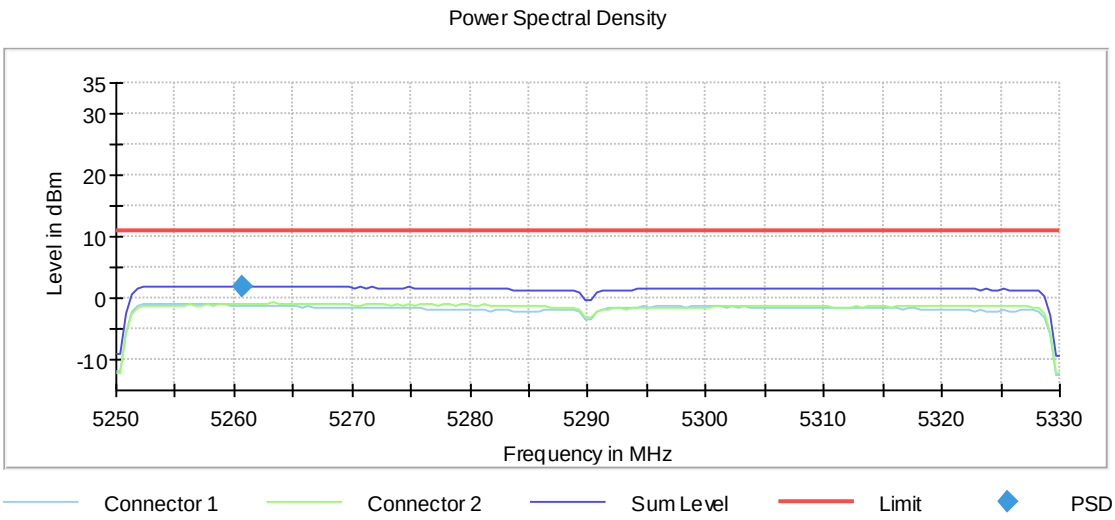

Occupied Channel Bandwidth 99% (5290 MHz; 24.000 dBm; 80 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	79.000000	---	---	5250.500000	5329.500000

DUT Frequency (MHz)	Result
5290.000000	PASS

99 % Bandwidth

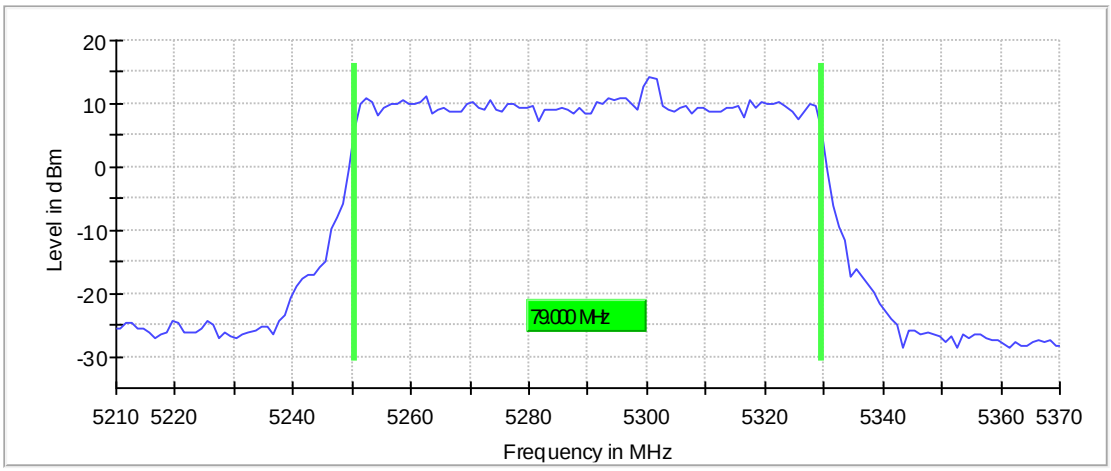

Bandwidth

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.21000 GHz	5.21000 GHz
Stop Frequency	5.37000 GHz	5.37000 GHz
Span	160.000 MHz	160.000 MHz
RBW	2.000 MHz	>= 1.600 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	160	~ 160

Sweeptime	16.875 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5250 MHz; 24.000 dBm; 160 MHz)

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5250.000000	175.000000	---	---	5163.500000	5338.500000

DUT Frequency (MHz)	Max Level (dBm)	Result
5250.000000	10.6	PASS

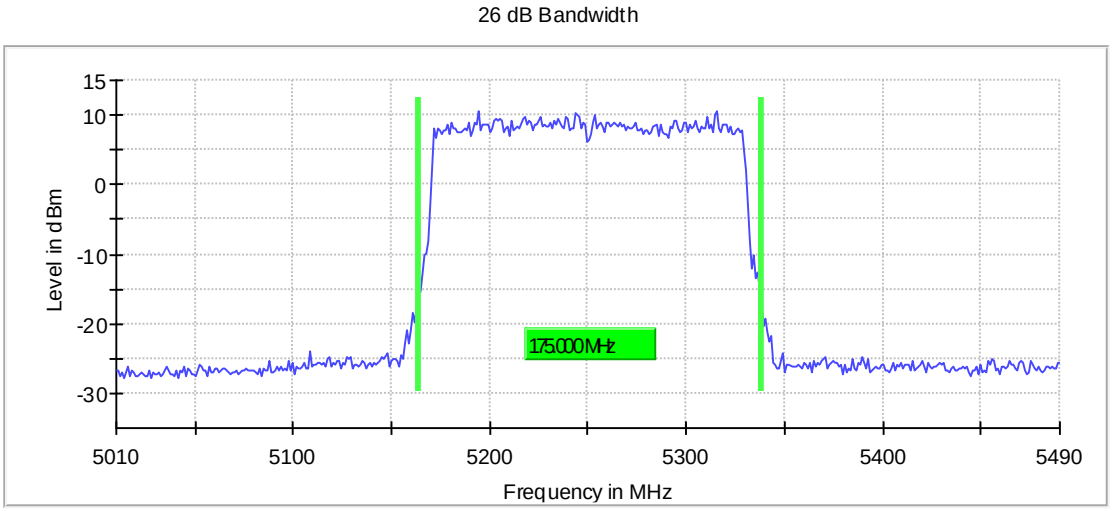

Bandwidth

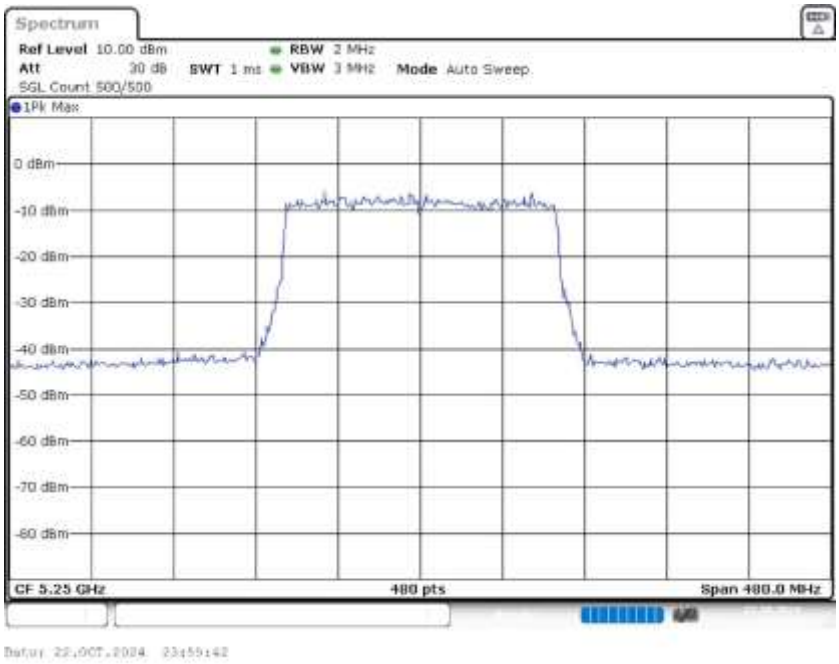

Power Spectral Density (5250 MHz; 24.000 dBm; 160 MHz)

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5250.000000	5258.750000	-0.331	11.0	PASS

Ports

Port	State
1	used
2	used

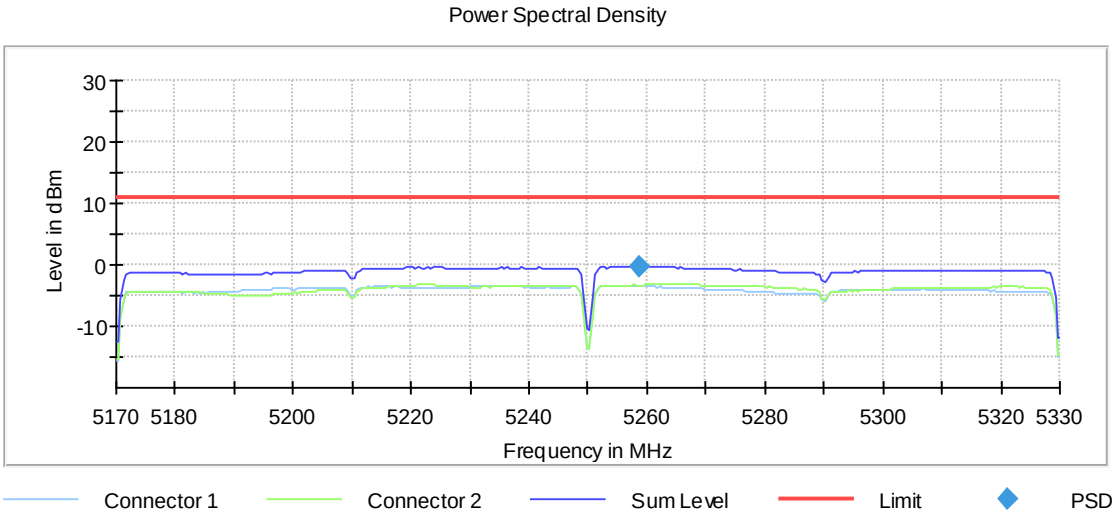

Occupied Channel Bandwidth 99% (5250 MHz; 24.000 dBm; 160 MHz)

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5250.000000	158.000000	---	---	5170.500000	5328.500000

DUT Frequency (MHz)	Result
5250.000000	PASS

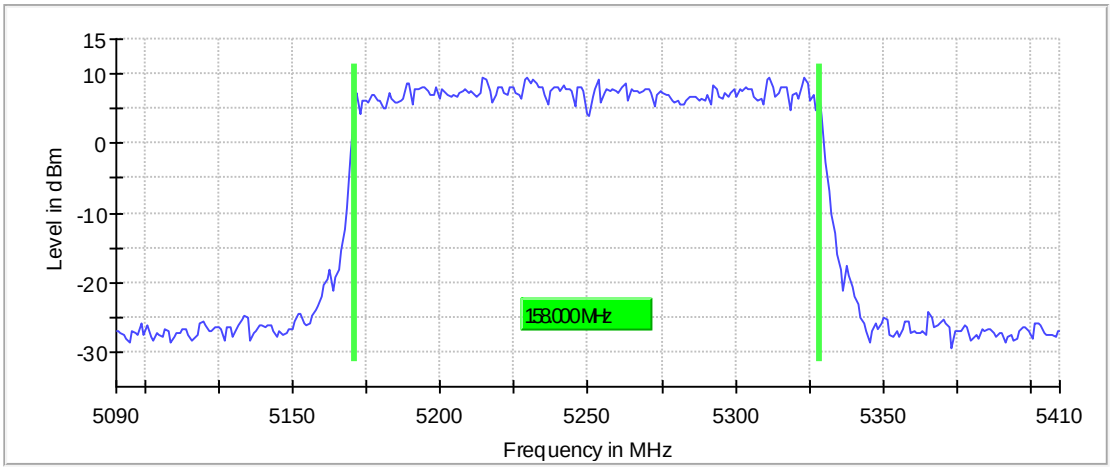

Bandwidth

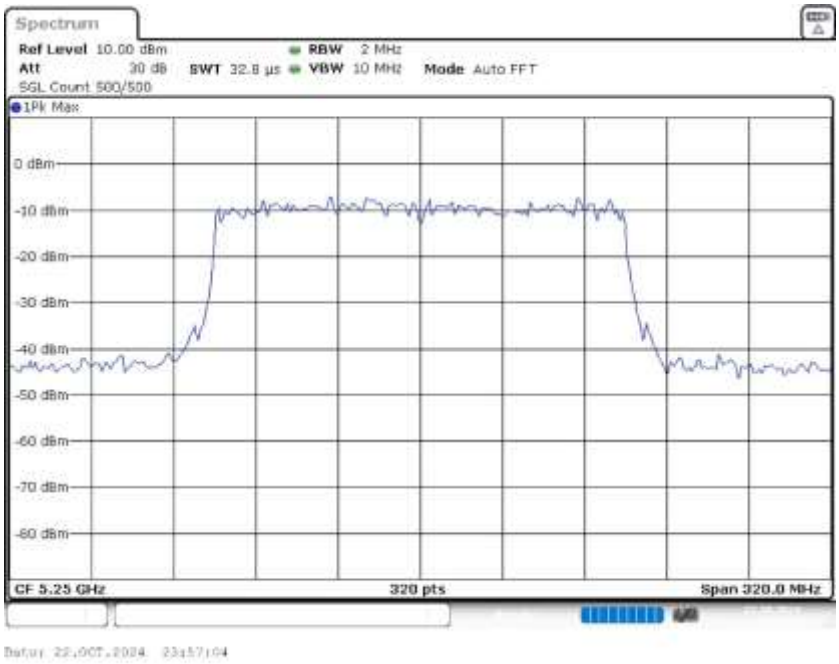

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.09000 GHz	5.09000 GHz
Stop Frequency	5.41000 GHz	5.41000 GHz
Span	320.000 MHz	320.000 MHz
RBW	2.000 MHz	>= 1.600 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	320	~ 320
Sweeptime	32.813 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

-- End of Report –