



Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

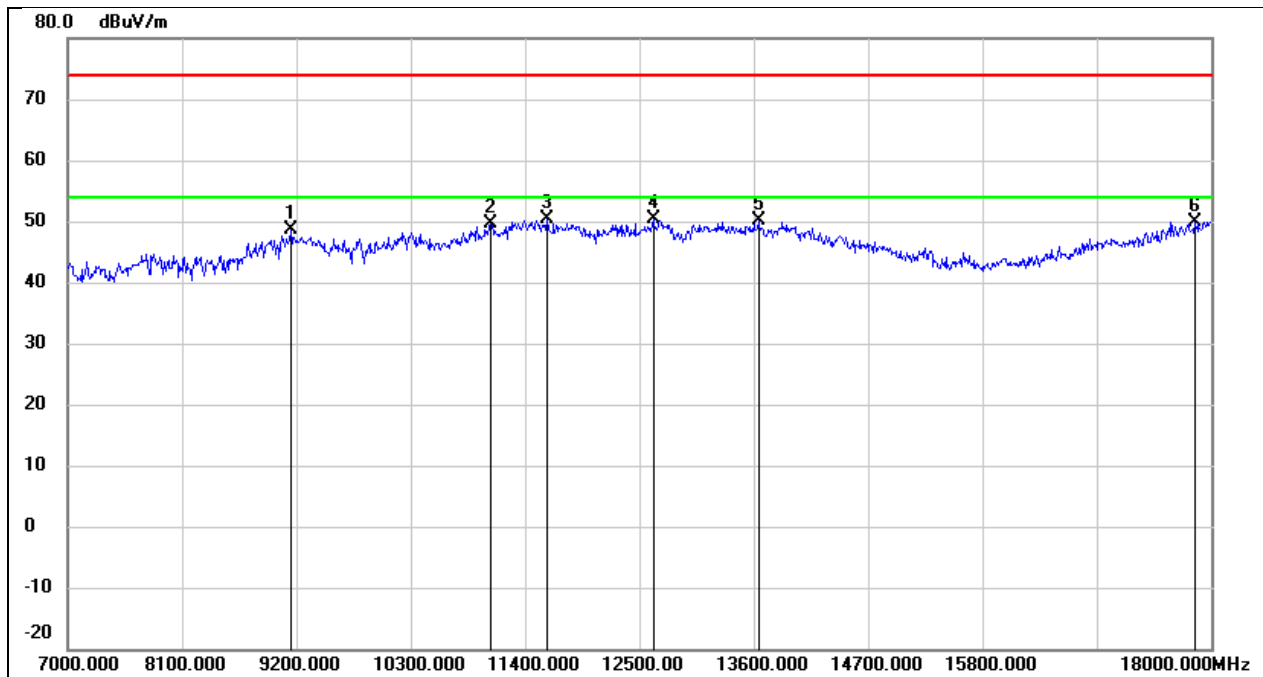


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.21	10.43	48.64	74.00	-25.36	peak
2	11070.000	34.72	15.01	49.73	74.00	-24.27	peak
3	11609.000	33.49	16.98	50.47	74.00	-23.53	peak
4	12632.000	32.35	17.99	50.34	74.00	-23.66	peak
5	13644.000	29.09	20.99	50.08	74.00	-23.92	peak
6	17846.000	24.88	25.08	49.96	74.00	-24.04	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3 V

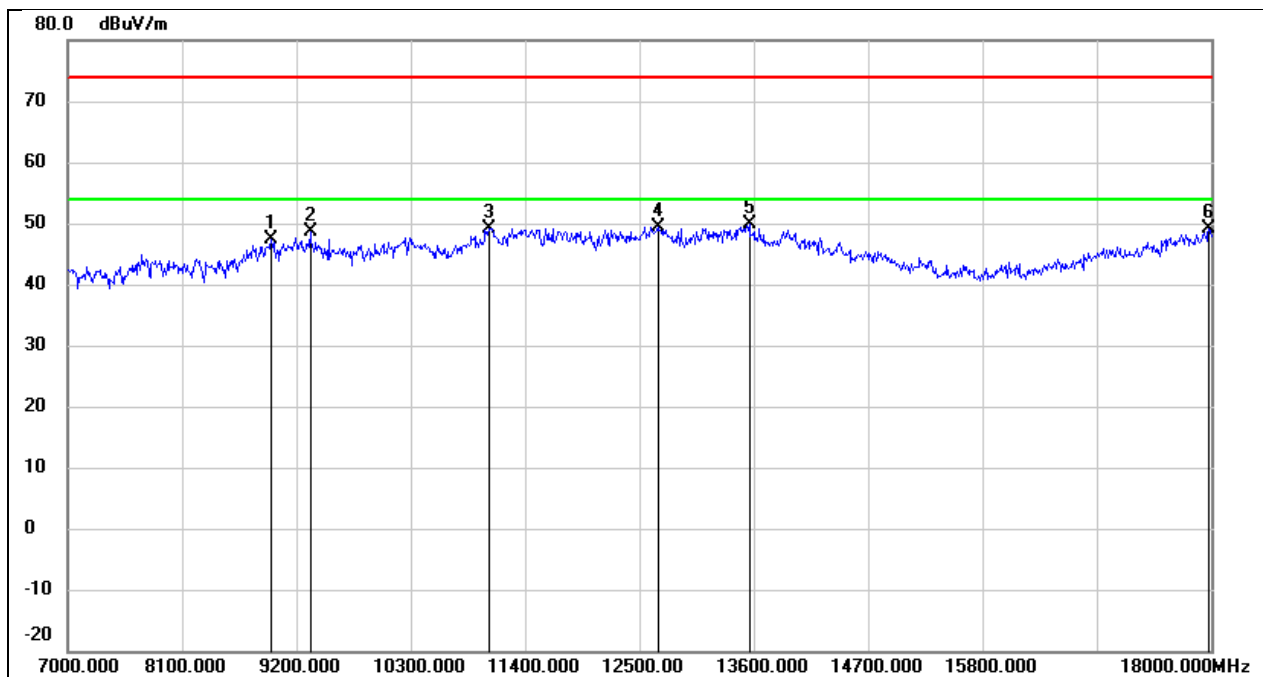


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.30	10.05	47.35	74.00	-26.65	peak
2	9332.000	38.02	10.54	48.56	74.00	-25.44	peak
3	11059.000	34.17	14.96	49.13	74.00	-24.87	peak
4	12676.000	31.30	18.05	49.35	74.00	-24.65	peak
5	13556.000	28.99	20.78	49.77	74.00	-24.23	peak
6	17978.000	23.26	25.97	49.23	74.00	-24.77	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

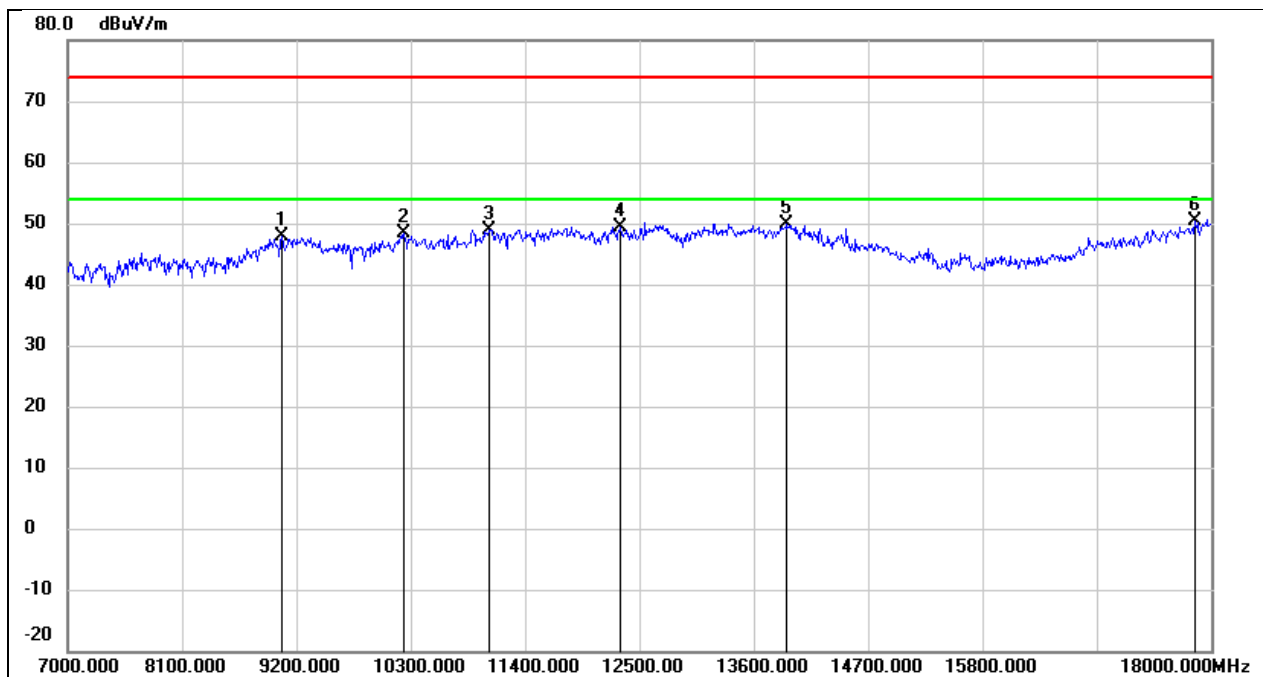


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.59	10.38	47.97	74.00	-26.03	peak
2	10234.000	36.05	12.26	48.31	74.00	-25.69	peak
3	11059.000	34.03	14.96	48.99	74.00	-25.01	peak
4	12313.000	31.69	17.78	49.47	74.00	-24.53	peak
5	13919.000	28.15	21.68	49.83	74.00	-24.17	peak
6	17846.000	25.28	25.08	50.36	74.00	-23.64	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3 V

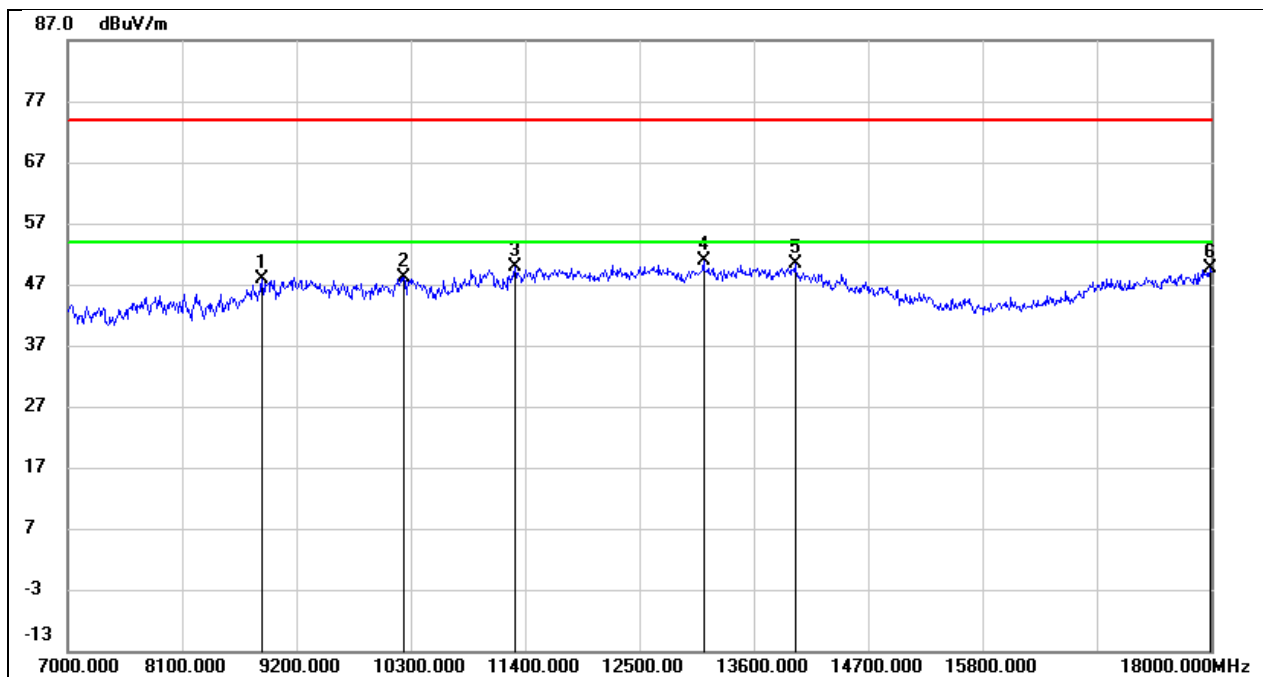


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	38.35	9.44	47.79	74.00	-26.21	peak
2	10234.000	35.97	12.26	48.23	74.00	-25.77	peak
3	11301.000	33.91	15.95	49.86	74.00	-24.14	peak
4	13116.000	31.81	18.96	50.77	74.00	-23.23	peak
5	13996.000	28.60	21.87	50.47	74.00	-23.53	peak
6	17989.000	23.55	26.04	49.59	74.00	-24.41	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

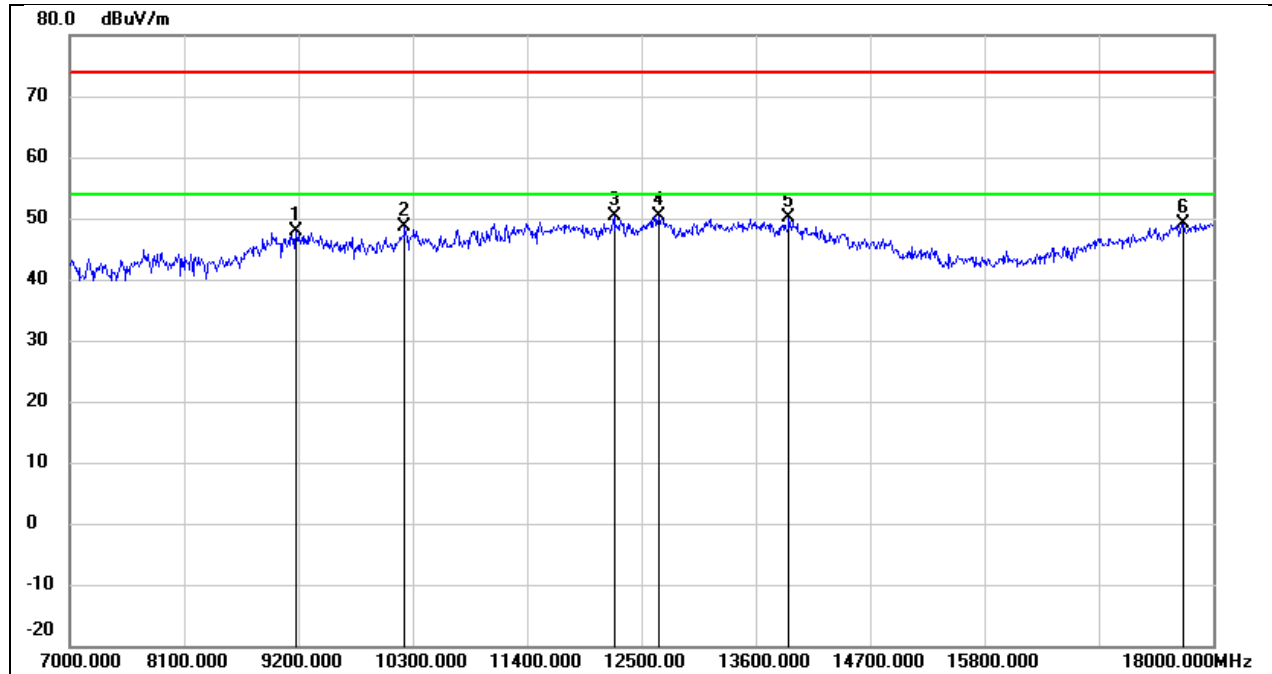


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.49	10.45	47.94	74.00	-26.06	peak
2	10223.000	36.48	12.24	48.72	74.00	-25.28	peak
3	12236.000	32.53	17.76	50.29	74.00	-23.71	peak
4	12665.000	32.37	18.04	50.41	74.00	-23.59	peak
5	13919.000	28.42	21.68	50.10	74.00	-23.90	peak
6	17714.000	25.02	24.16	49.18	74.00	-24.82	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3 V

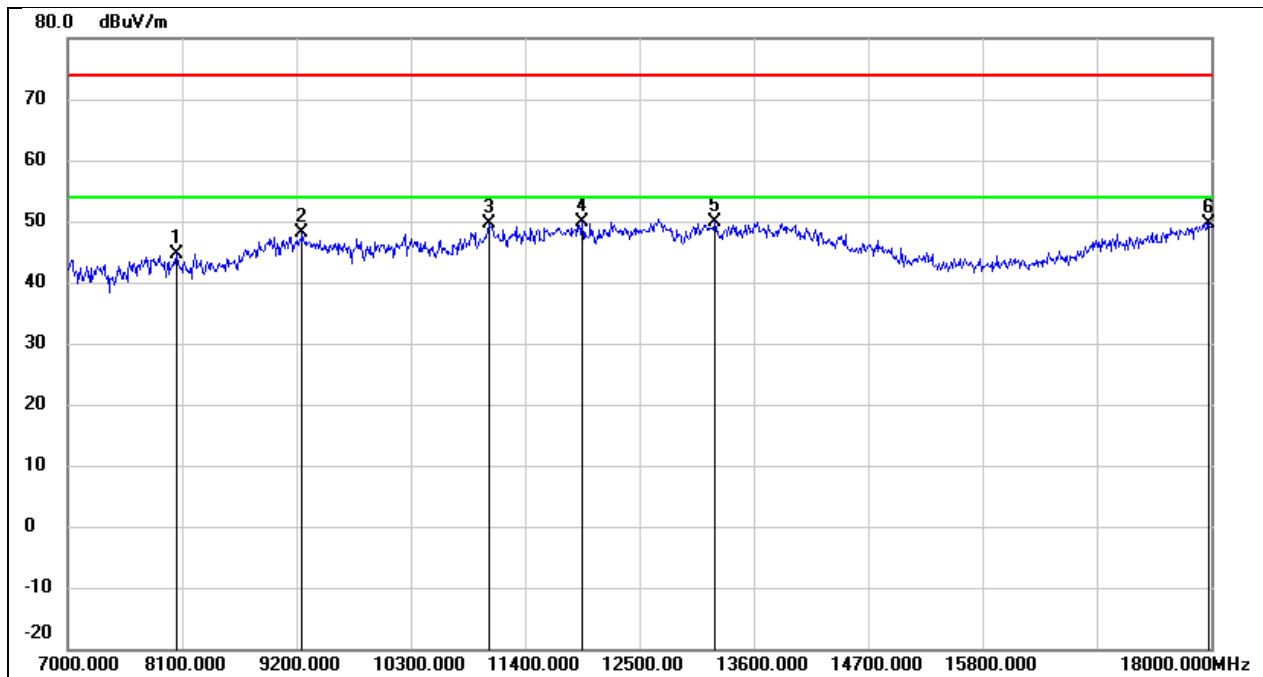


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8045.000	38.11	6.47	44.58	74.00	-29.42	peak
2	9255.000	37.62	10.51	48.13	74.00	-25.87	peak
3	11048.000	34.69	14.91	49.60	74.00	-24.40	peak
4	11950.000	32.39	17.61	50.00	74.00	-24.00	peak
5	13226.000	30.35	19.44	49.79	74.00	-24.21	peak
6	17978.000	23.61	25.97	49.58	74.00	-24.42	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

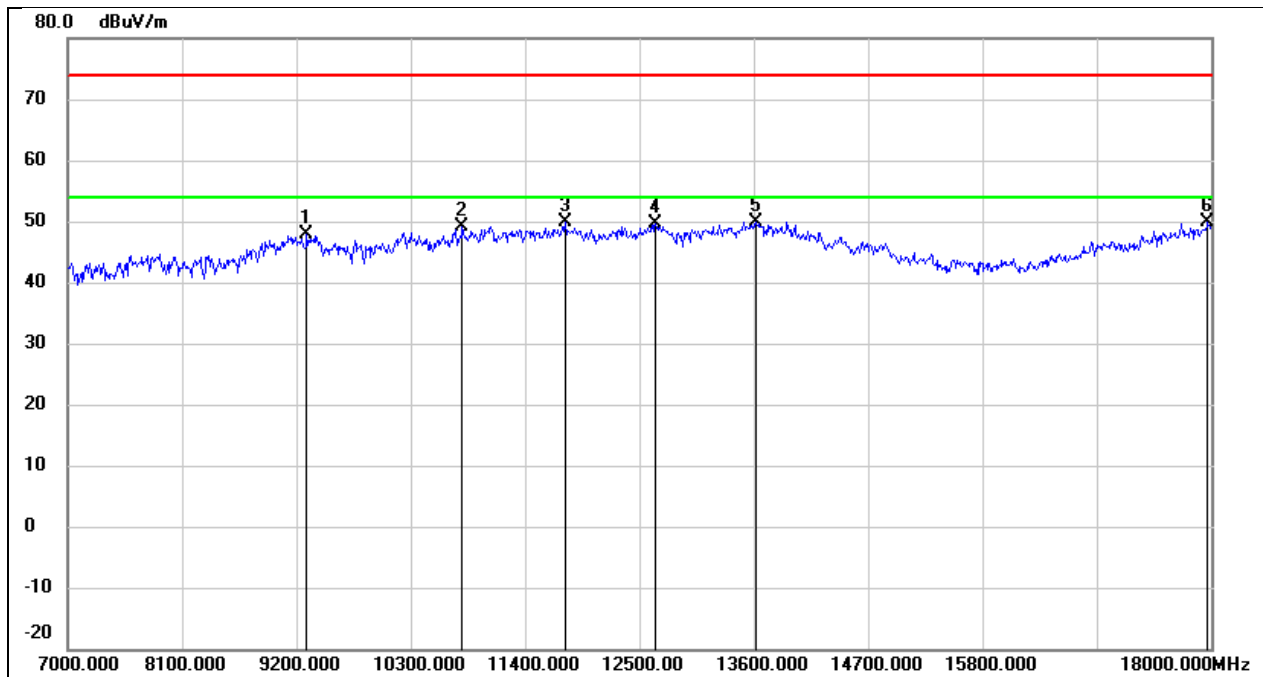


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	37.24	10.53	47.77	74.00	-26.23	peak
2	10795.000	35.19	13.94	49.13	74.00	-24.87	peak
3	11785.000	32.53	17.30	49.83	74.00	-24.17	peak
4	12654.000	31.66	18.01	49.67	74.00	-24.33	peak
5	13622.000	29.04	20.95	49.99	74.00	-24.01	peak
6	17967.000	24.06	25.89	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3 V

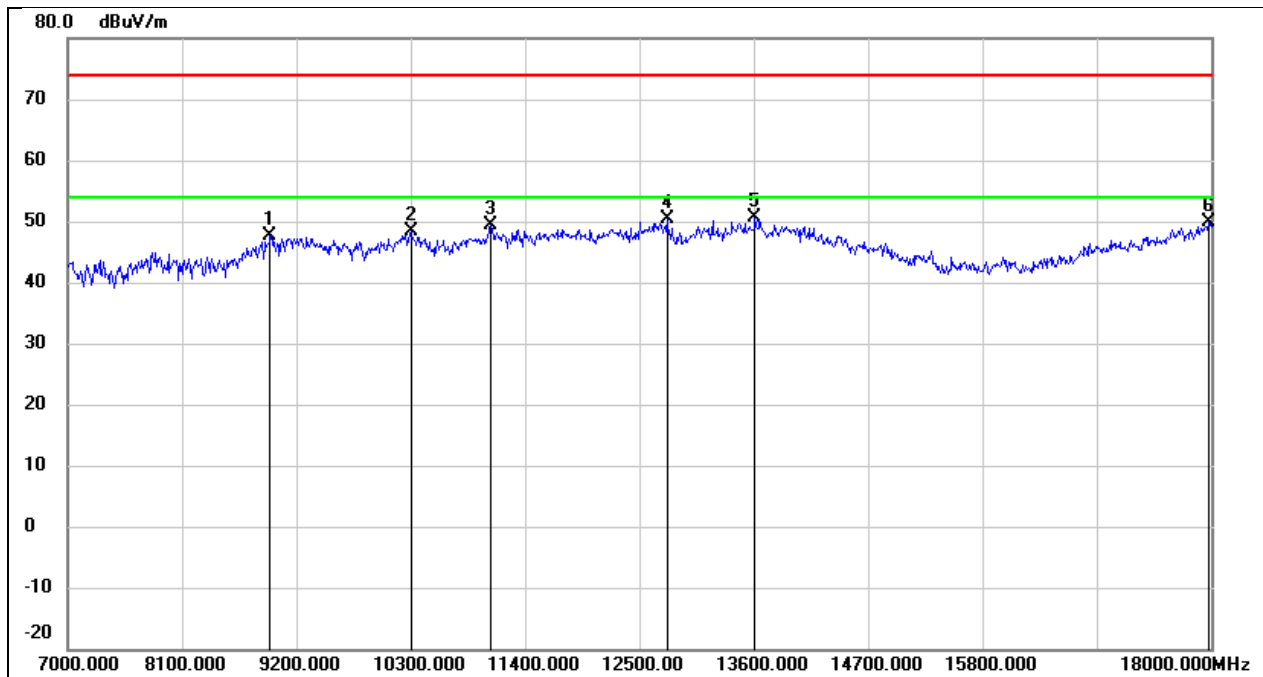


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8947.000	37.67	9.98	47.65	74.00	-26.35	peak
2	10300.000	35.93	12.40	48.33	74.00	-25.67	peak
3	11070.000	34.46	15.01	49.47	74.00	-24.53	peak
4	12764.000	32.28	18.16	50.44	74.00	-23.56	peak
5	13611.000	29.81	20.92	50.73	74.00	-23.27	peak
6	17978.000	23.80	25.97	49.77	74.00	-24.23	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

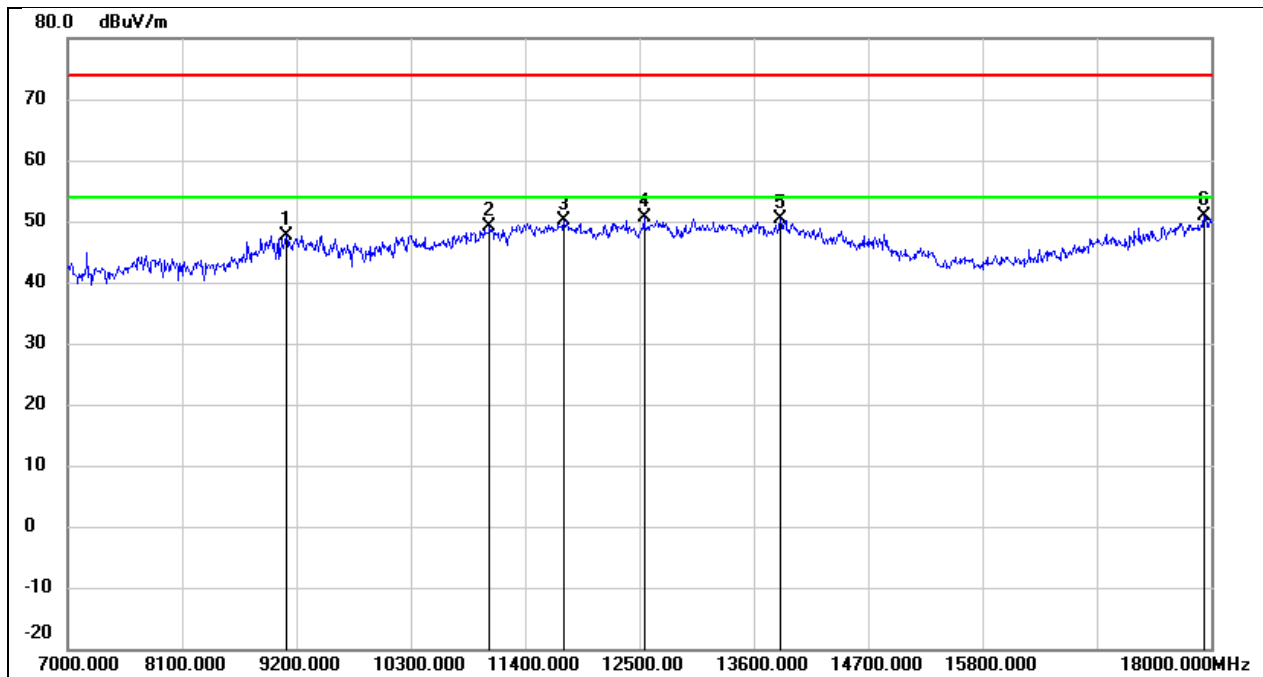


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	37.26	10.40	47.66	74.00	-26.34	peak
2	11059.000	34.26	14.96	49.22	74.00	-24.78	peak
3	11774.000	32.74	17.28	50.02	74.00	-23.98	peak
4	12544.000	32.63	17.88	50.51	74.00	-23.49	peak
5	13853.000	28.82	21.52	50.34	74.00	-23.66	peak
6	17934.000	25.15	25.67	50.82	74.00	-23.18	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3 V

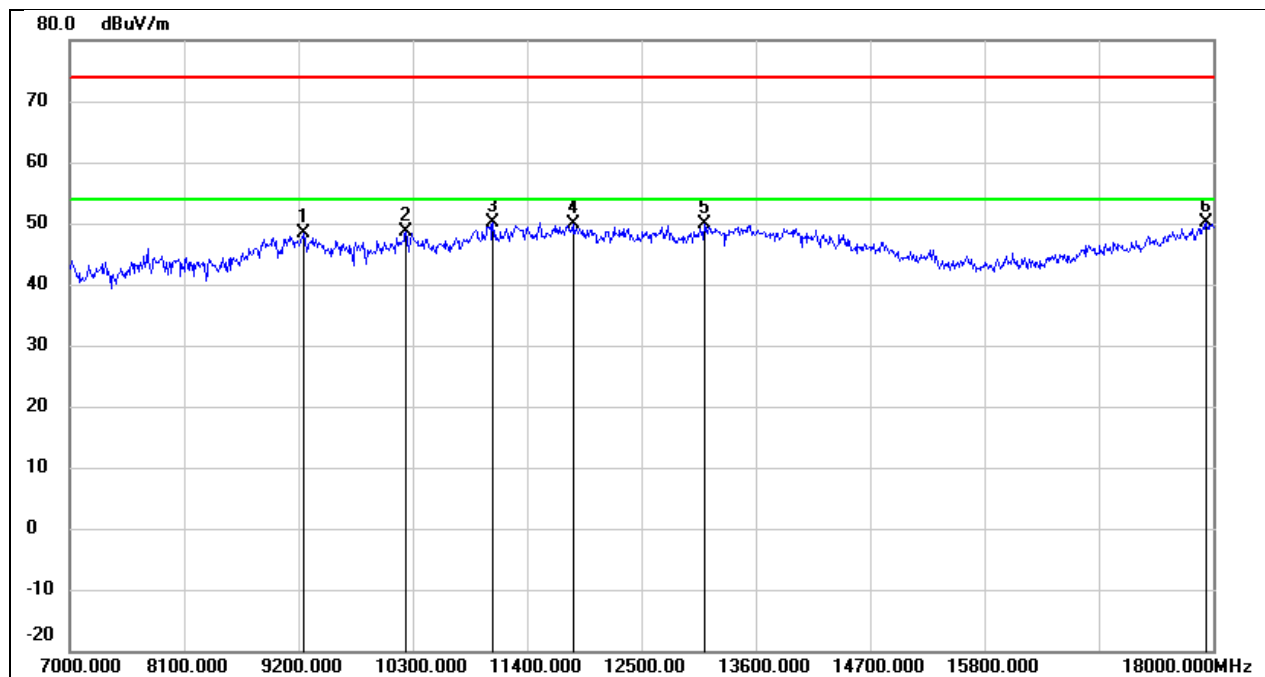


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.92	10.51	48.43	74.00	-25.57	peak
2	10234.000	36.44	12.26	48.70	74.00	-25.30	peak
3	11070.000	35.16	15.01	50.17	74.00	-23.83	peak
4	11851.000	32.51	17.43	49.94	74.00	-24.06	peak
5	13105.000	30.87	18.91	49.78	74.00	-24.22	peak
6	17934.000	24.46	25.67	50.13	74.00	-23.87	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

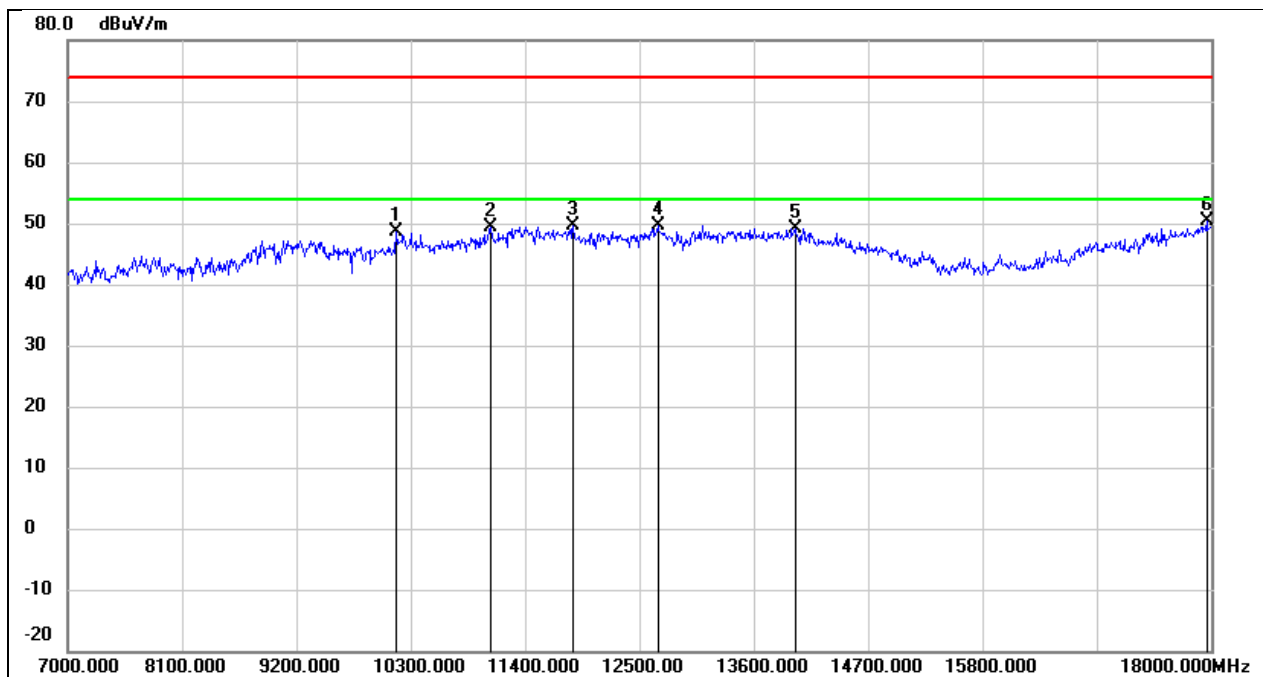


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10157.000	36.41	12.10	48.51	74.00	-25.49	peak
2	11070.000	34.26	15.01	49.27	74.00	-24.73	peak
3	11862.000	32.25	17.45	49.70	74.00	-24.30	peak
4	12676.000	31.68	18.05	49.73	74.00	-24.27	peak
5	13996.000	27.36	21.87	49.23	74.00	-24.77	peak
6	17956.000	24.51	25.82	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3 V

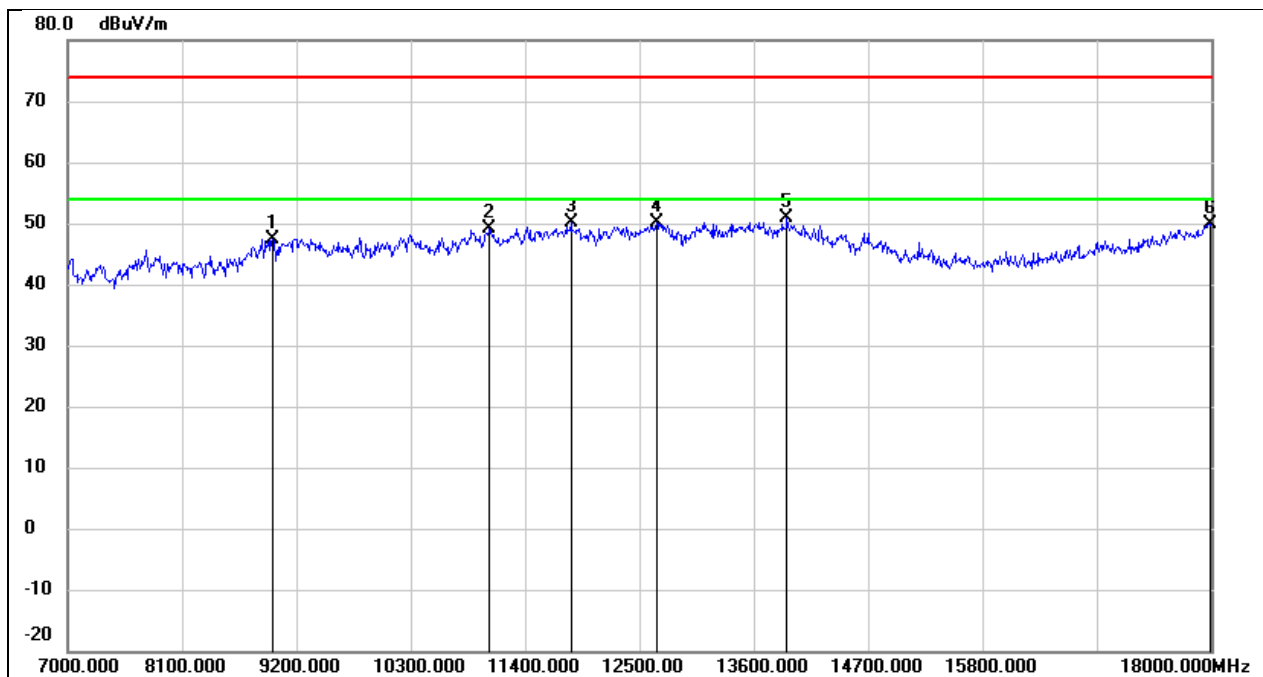


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8969.000	37.29	10.13	47.42	74.00	-26.58	peak
2	11059.000	34.15	14.96	49.11	74.00	-24.89	peak
3	11840.000	32.79	17.40	50.19	74.00	-23.81	peak
4	12665.000	32.02	18.04	50.06	74.00	-23.94	peak
5	13919.000	29.09	21.68	50.77	74.00	-23.23	peak
6	17989.000	23.85	26.04	49.89	74.00	-24.11	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

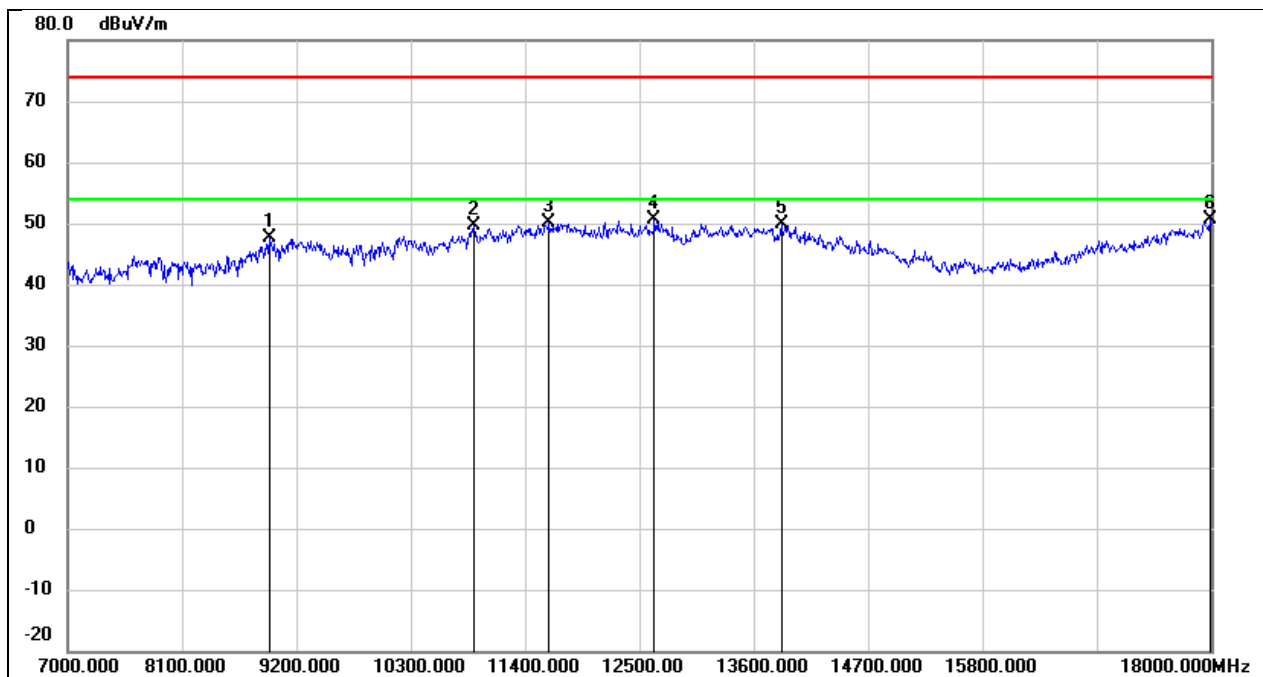


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	37.73	9.90	47.63	74.00	-26.37	peak
2	10905.000	35.15	14.36	49.51	74.00	-24.49	peak
3	11631.000	33.03	17.01	50.04	74.00	-23.96	peak
4	12643.000	32.59	18.01	50.60	74.00	-23.40	peak
5	13864.000	28.28	21.53	49.81	74.00	-24.19	peak
6	17989.000	24.67	26.04	50.71	74.00	-23.29	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3 V

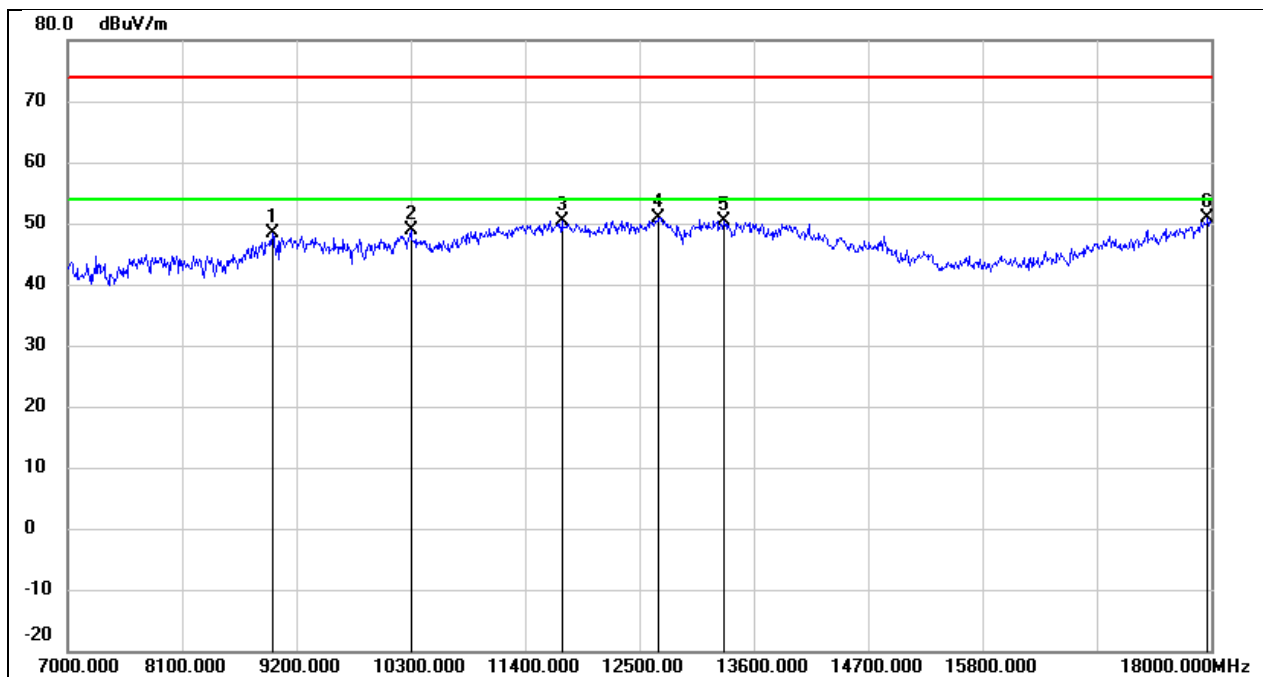


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8969.000	38.22	10.13	48.35	74.00	-25.65	peak
2	10300.000	36.58	12.40	48.98	74.00	-25.02	peak
3	11752.000	33.21	17.24	50.45	74.00	-23.55	peak
4	12687.000	32.91	18.05	50.96	74.00	-23.04	peak
5	13314.000	30.65	19.83	50.48	74.00	-23.52	peak
6	17967.000	25.03	25.89	50.92	74.00	-23.08	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

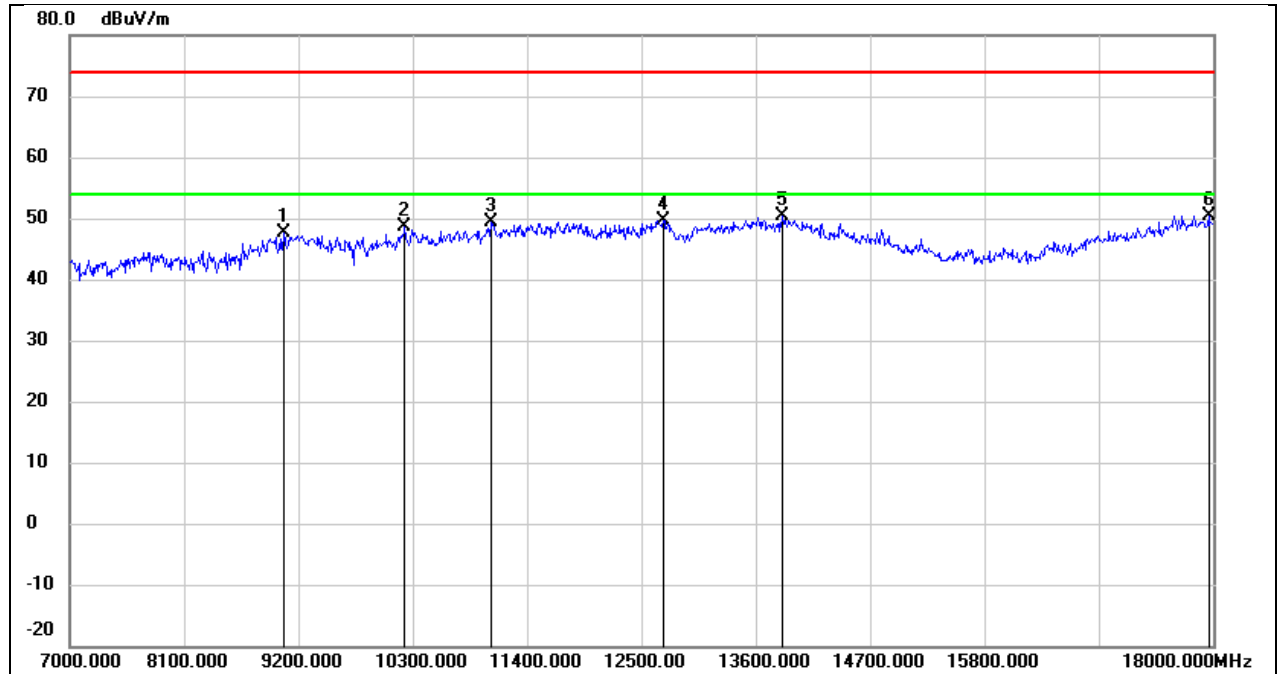


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.29	10.38	47.67	74.00	-26.33	peak
2	10223.000	36.38	12.24	48.62	74.00	-25.38	peak
3	11059.000	34.44	14.96	49.40	74.00	-24.60	peak
4	12709.000	31.54	18.09	49.63	74.00	-24.37	peak
5	13853.000	28.80	21.52	50.32	74.00	-23.68	peak
6	17956.000	24.62	25.82	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3 V

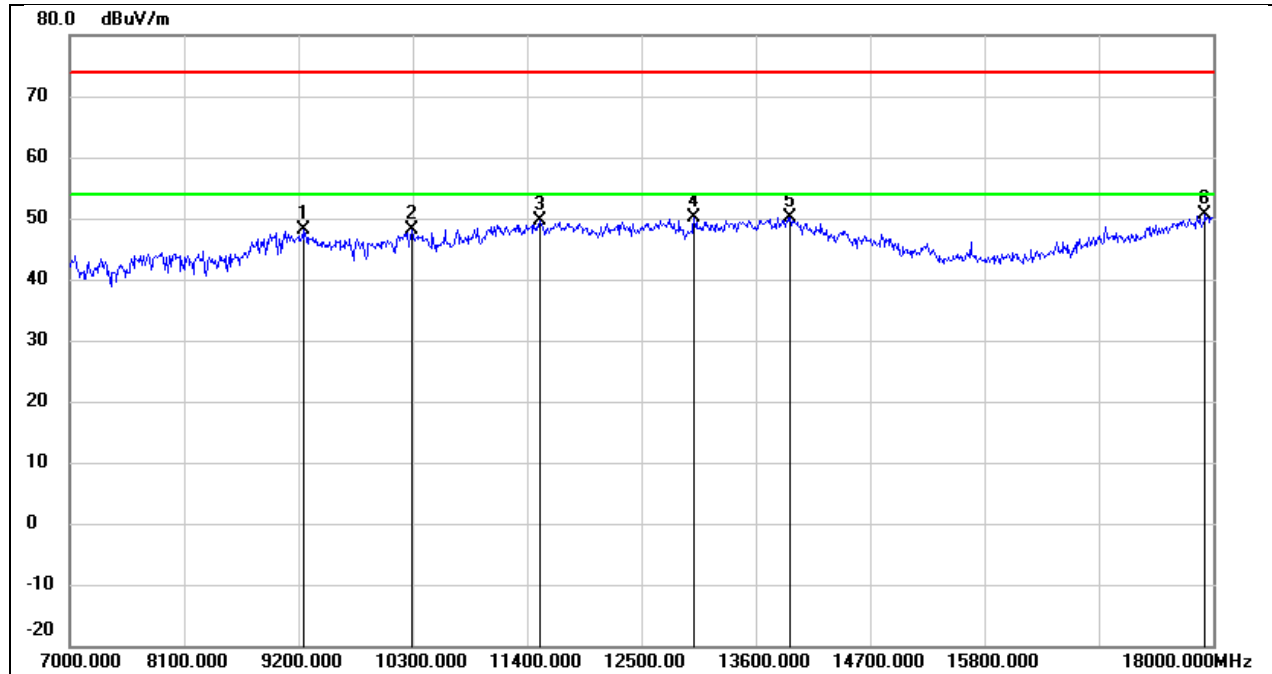


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.71	10.49	48.20	74.00	-25.80	peak
2	10289.000	35.64	12.38	48.02	74.00	-25.98	peak
3	11521.000	32.93	16.82	49.75	74.00	-24.25	peak
4	13006.000	31.55	18.47	50.02	74.00	-23.98	peak
5	13930.000	28.42	21.71	50.13	74.00	-23.87	peak
6	17923.000	25.07	25.60	50.67	74.00	-23.33	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

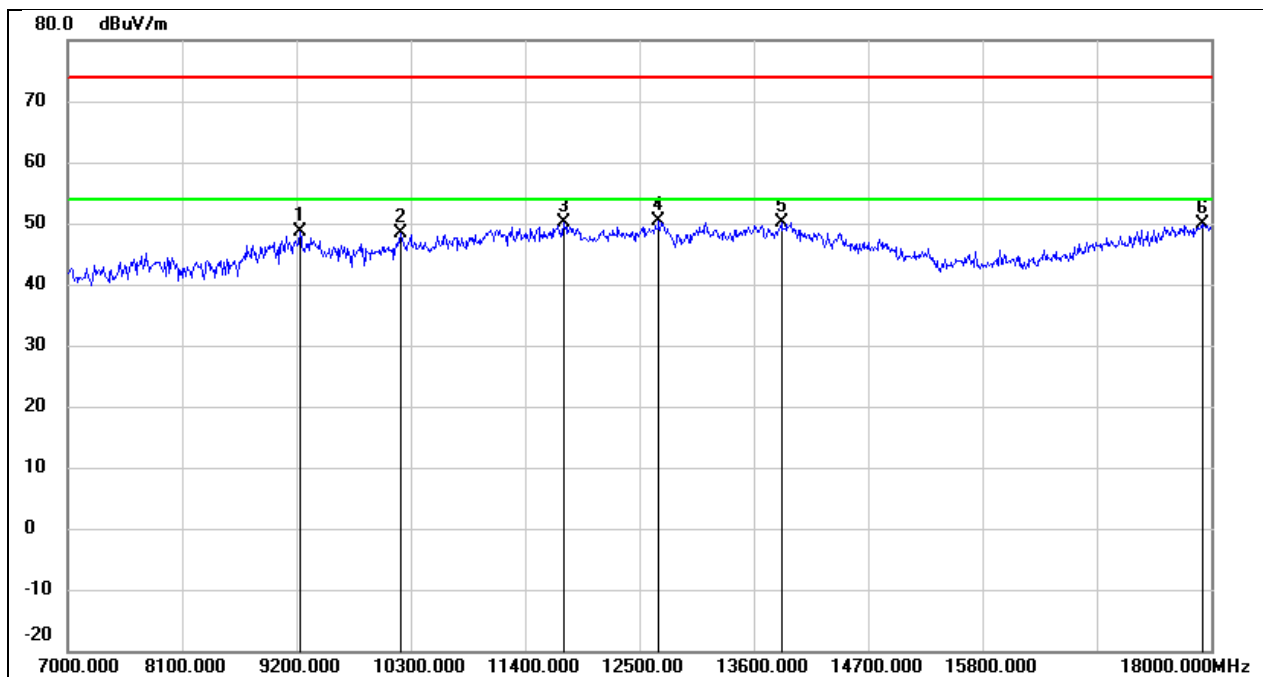


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.14	10.48	48.62	74.00	-25.38	peak
2	10201.000	36.29	12.19	48.48	74.00	-25.52	peak
3	11774.000	32.86	17.28	50.14	74.00	-23.86	peak
4	12687.000	32.31	18.05	50.36	74.00	-23.64	peak
5	13864.000	28.69	21.53	50.22	74.00	-23.78	peak
6	17912.000	24.45	25.52	49.97	74.00	-24.03	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

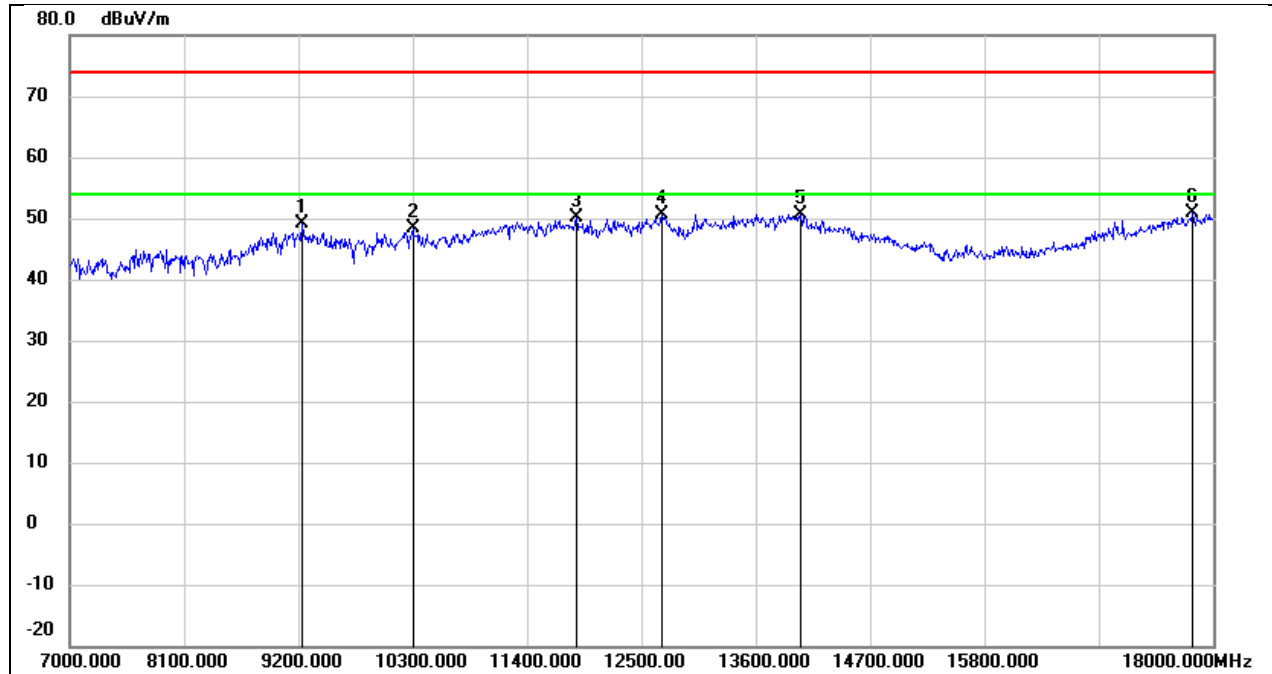


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.75	10.48	49.23	74.00	-24.77	peak
2	10300.000	36.01	12.40	48.41	74.00	-25.59	peak
3	11873.000	32.63	17.46	50.09	74.00	-23.91	peak
4	12698.000	32.63	18.08	50.71	74.00	-23.29	peak
5	14029.000	28.95	21.76	50.71	74.00	-23.29	peak
6	17802.000	26.06	24.76	50.82	74.00	-23.18	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

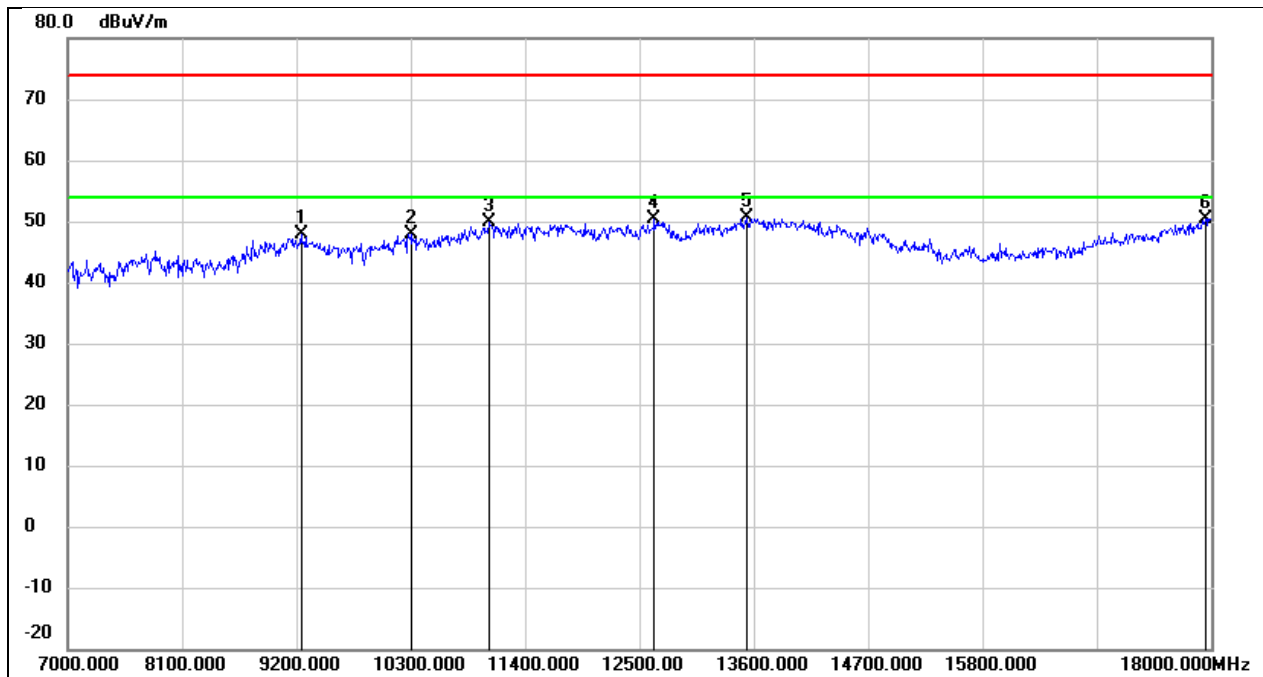


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.46	10.49	47.95	74.00	-26.05	peak
2	10300.000	35.43	12.40	47.83	74.00	-26.17	peak
3	11048.000	34.88	14.91	49.79	74.00	-24.21	peak
4	12643.000	32.30	18.01	50.31	74.00	-23.69	peak
5	13534.000	29.91	20.73	50.64	74.00	-23.36	peak
6	17945.000	24.68	25.75	50.43	74.00	-23.57	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

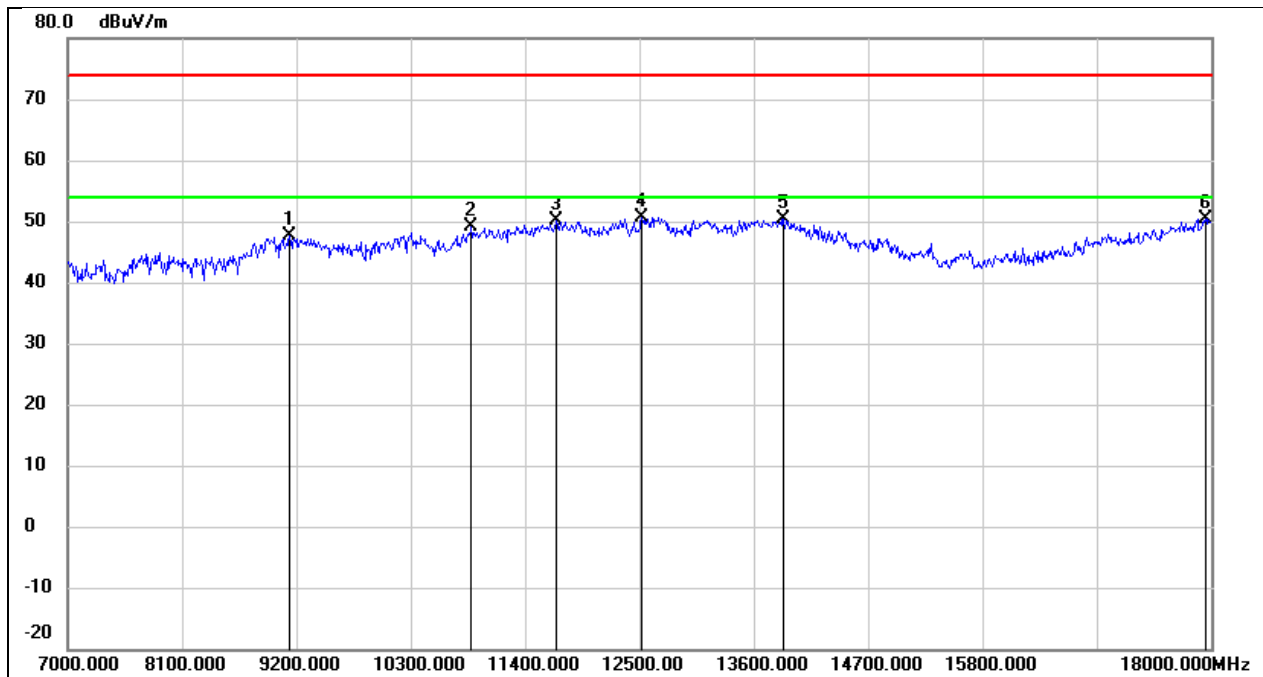


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.26	10.41	47.67	74.00	-26.33	peak
2	10883.000	34.93	14.27	49.20	74.00	-24.80	peak
3	11697.000	32.98	17.13	50.11	74.00	-23.89	peak
4	12522.000	32.78	17.86	50.64	74.00	-23.36	peak
5	13886.000	28.70	21.60	50.30	74.00	-23.70	peak
6	17945.000	24.54	25.75	50.29	74.00	-23.71	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

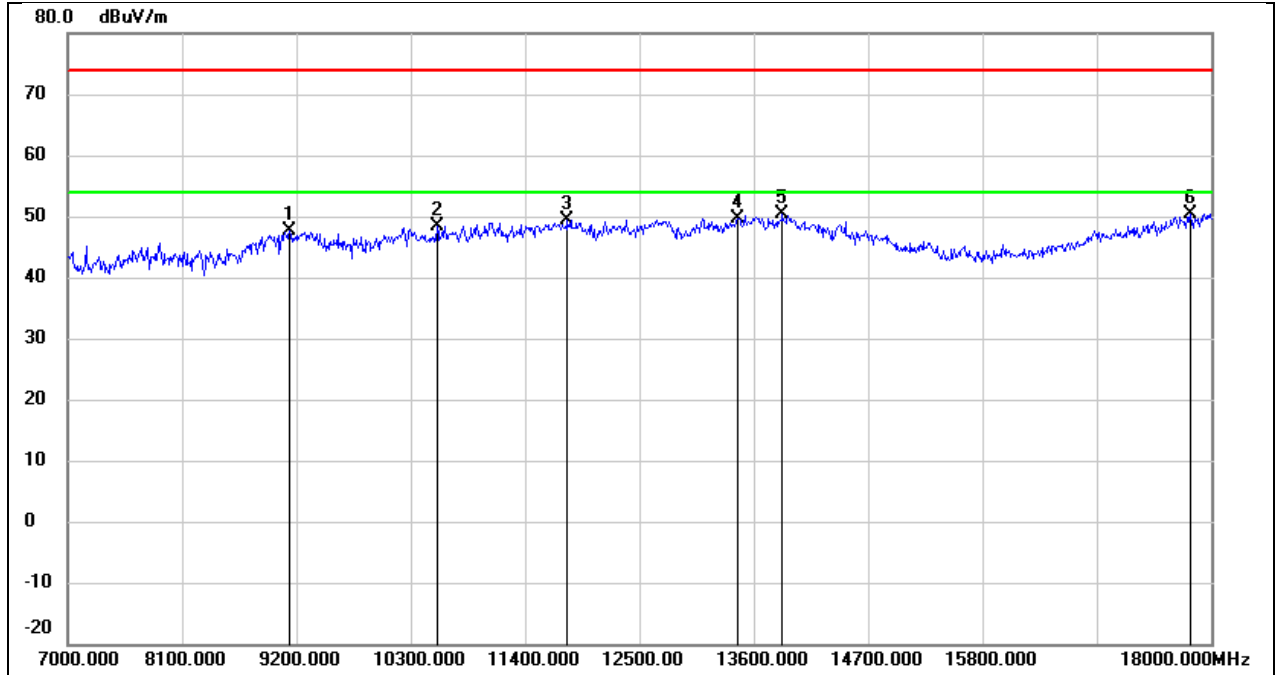


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.15	10.41	47.56	74.00	-26.44	peak
2	10553.000	35.45	13.02	48.47	74.00	-25.53	peak
3	11807.000	32.12	17.34	49.46	74.00	-24.54	peak
4	13446.000	29.31	20.41	49.72	74.00	-24.28	peak
5	13875.000	28.69	21.57	50.26	74.00	-23.74	peak
6	17802.000	25.74	24.76	50.50	74.00	-23.50	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

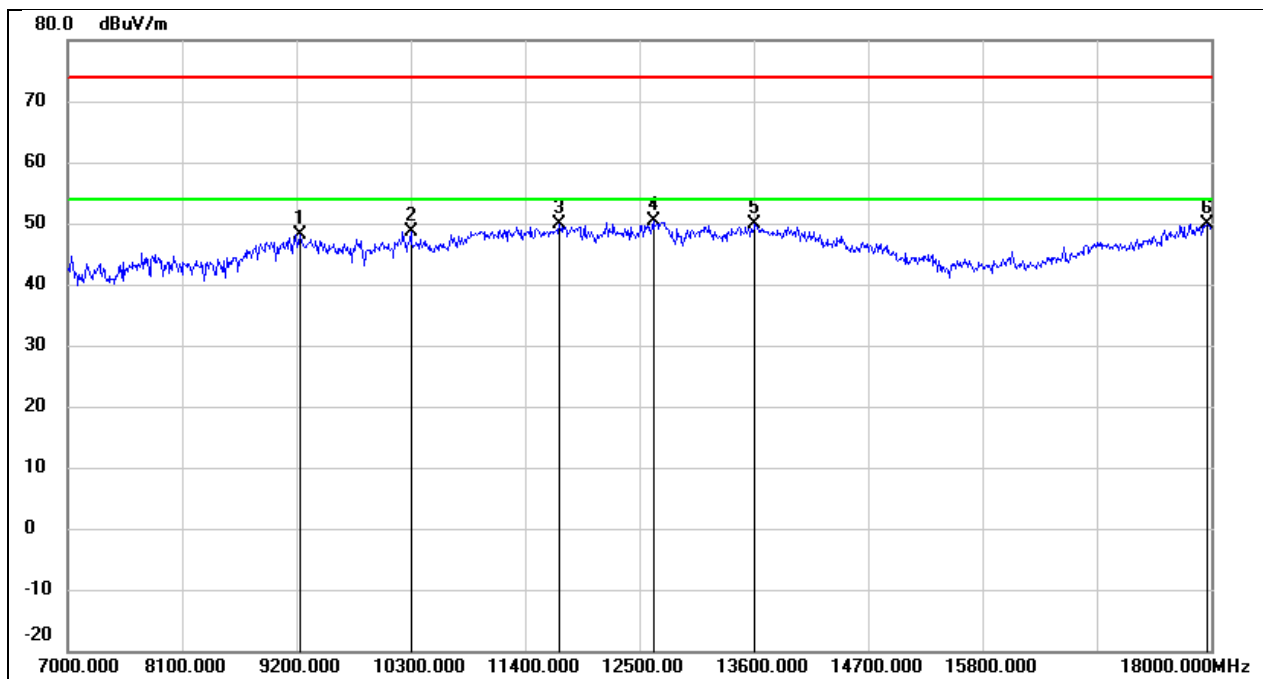


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.69	10.48	48.17	74.00	-25.83	peak
2	10300.000	36.27	12.40	48.67	74.00	-25.33	peak
3	11730.000	32.70	17.19	49.89	74.00	-24.11	peak
4	12632.000	32.44	17.99	50.43	74.00	-23.57	peak
5	13611.000	29.04	20.92	49.96	74.00	-24.04	peak
6	17967.000	24.04	25.89	49.93	74.00	-24.07	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

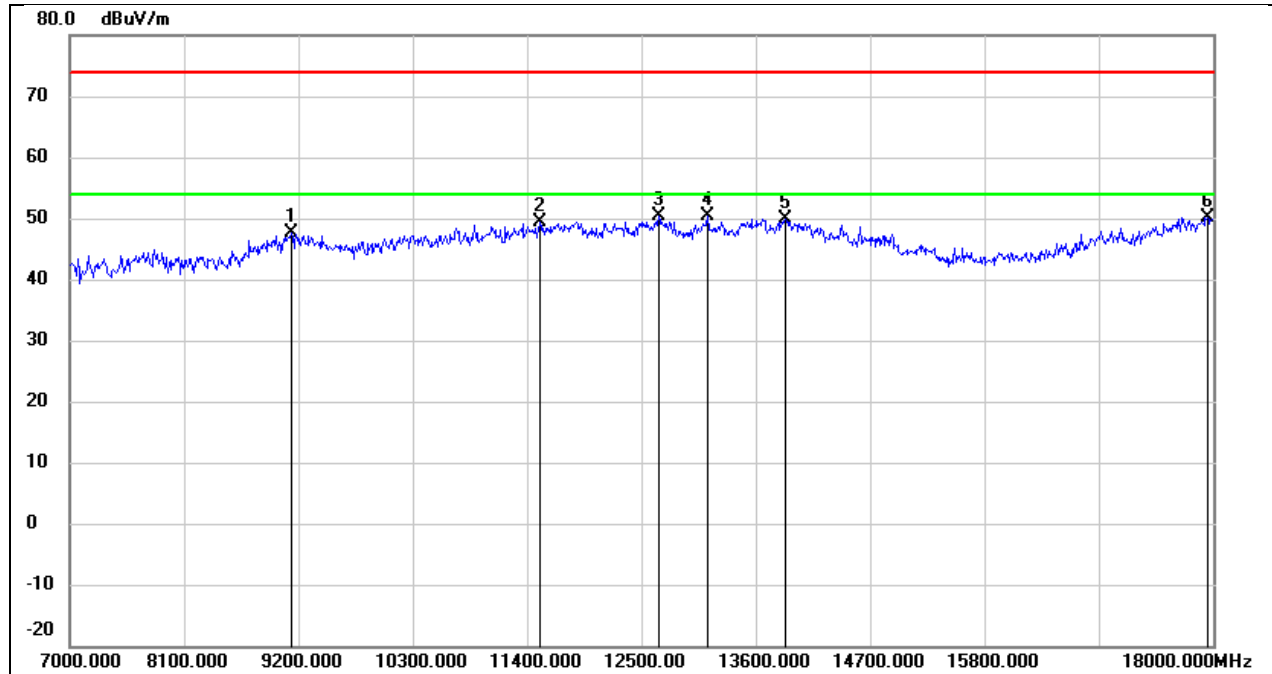


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.19	10.41	47.60	74.00	-26.40	peak
2	11521.000	32.60	16.82	49.42	74.00	-24.58	peak
3	12665.000	32.29	18.04	50.33	74.00	-23.67	peak
4	13138.000	31.43	19.05	50.48	74.00	-23.52	peak
5	13886.000	28.37	21.60	49.97	74.00	-24.03	peak
6	17945.000	24.48	25.75	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

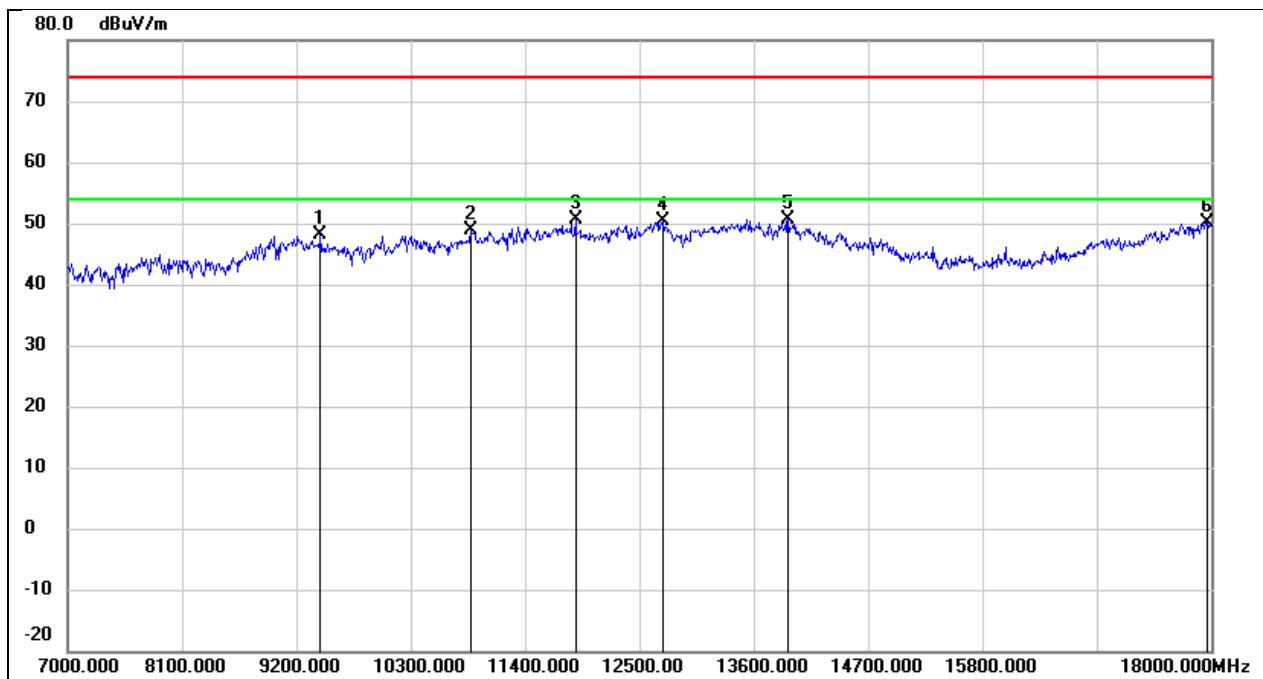


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	37.48	10.61	48.09	74.00	-25.91	peak
2	10872.000	34.59	14.23	48.82	74.00	-25.18	peak
3	11884.000	33.05	17.48	50.53	74.00	-23.47	peak
4	12731.000	32.16	18.12	50.28	74.00	-23.72	peak
5	13930.000	28.82	21.71	50.53	74.00	-23.47	peak
6	17967.000	24.35	25.89	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

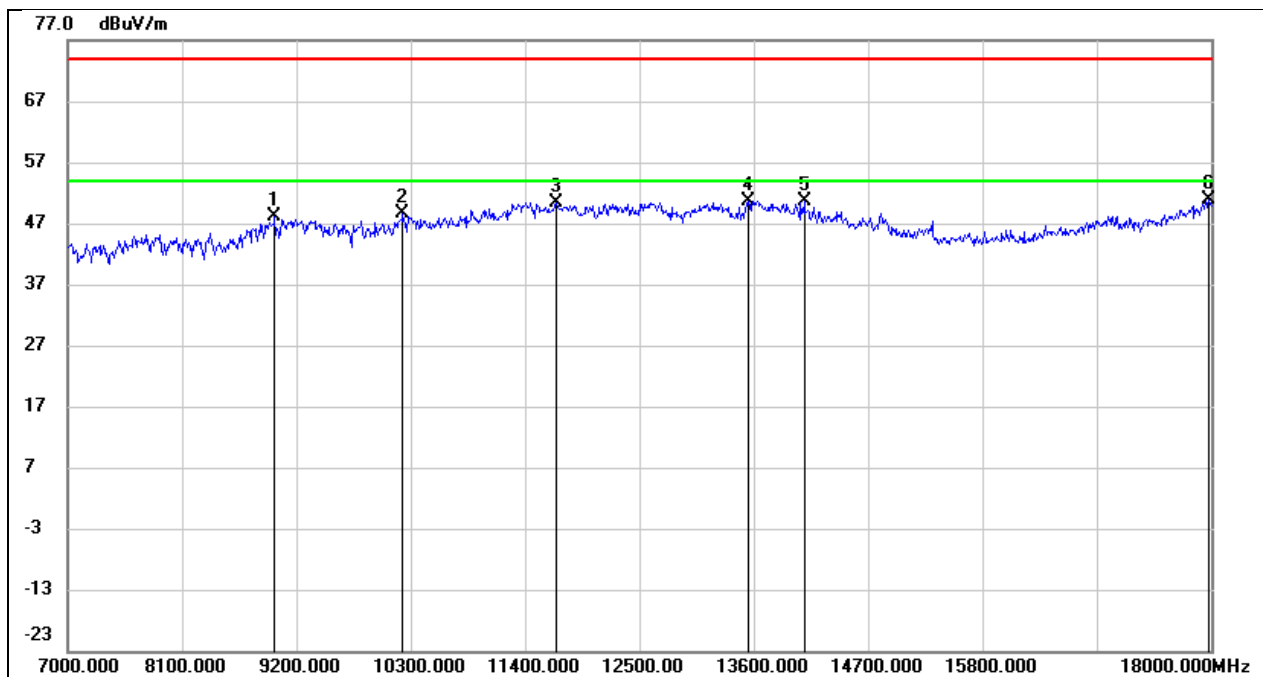


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.82	10.28	48.10	74.00	-25.90	peak
2	10223.000	36.46	12.24	48.70	74.00	-25.30	peak
3	11697.000	33.31	17.13	50.44	74.00	-23.56	peak
4	13545.000	29.76	20.75	50.51	74.00	-23.49	peak
5	14084.000	28.99	21.52	50.51	74.00	-23.49	peak
6	17978.000	24.81	25.97	50.78	74.00	-23.22	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3 V

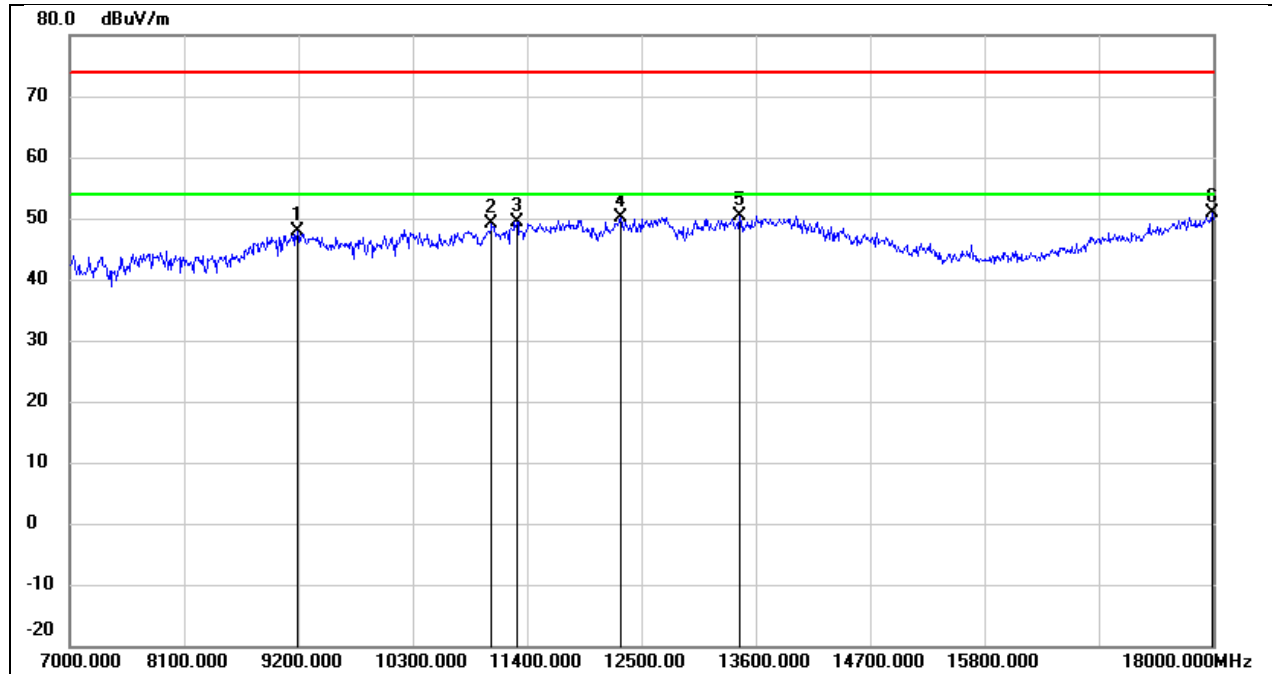


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.52	10.46	47.98	74.00	-26.02	peak
2	11059.000	34.21	14.96	49.17	74.00	-24.83	peak
3	11301.000	33.51	15.95	49.46	74.00	-24.54	peak
4	12302.000	32.35	17.78	50.13	74.00	-23.87	peak
5	13446.000	29.90	20.41	50.31	74.00	-23.69	peak
6	17989.000	24.86	26.04	50.90	74.00	-23.10	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

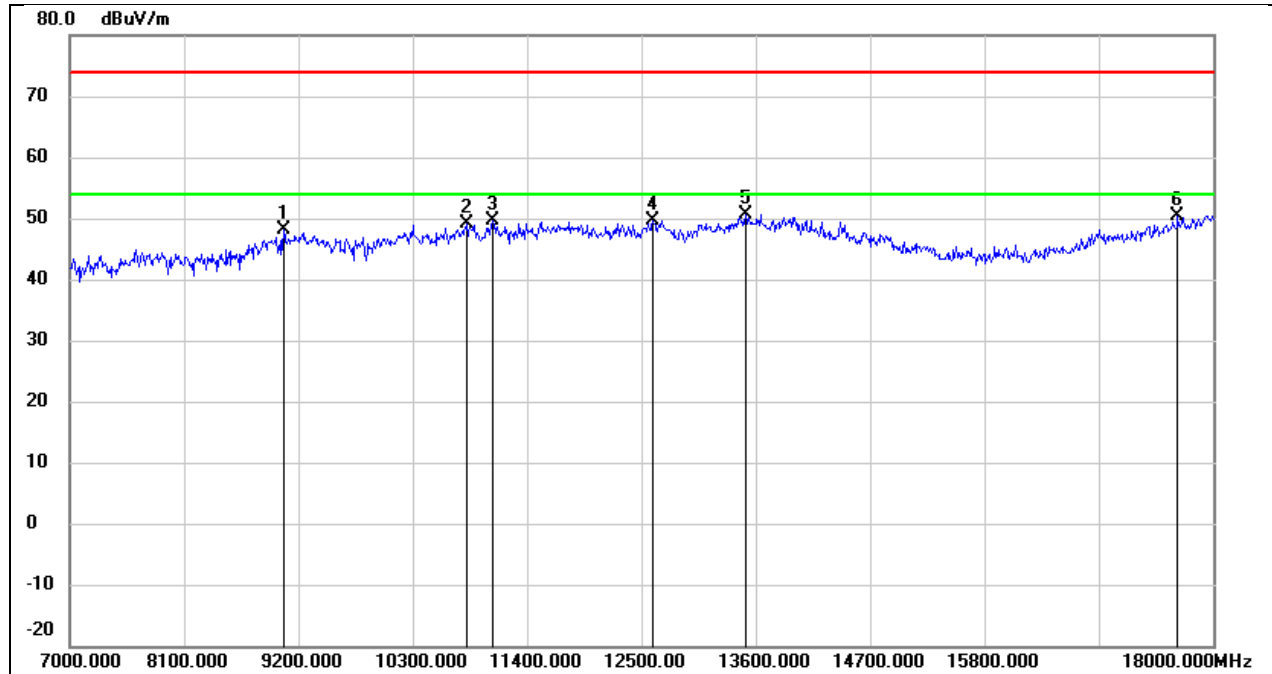


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.72	10.38	48.10	74.00	-25.90	peak
2	10817.000	35.20	14.03	49.23	74.00	-24.77	peak
3	11070.000	34.62	15.01	49.63	74.00	-24.37	peak
4	12610.000	31.56	17.97	49.53	74.00	-24.47	peak
5	13501.000	29.96	20.64	50.60	74.00	-23.40	peak
6	17659.000	26.60	23.78	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3 V

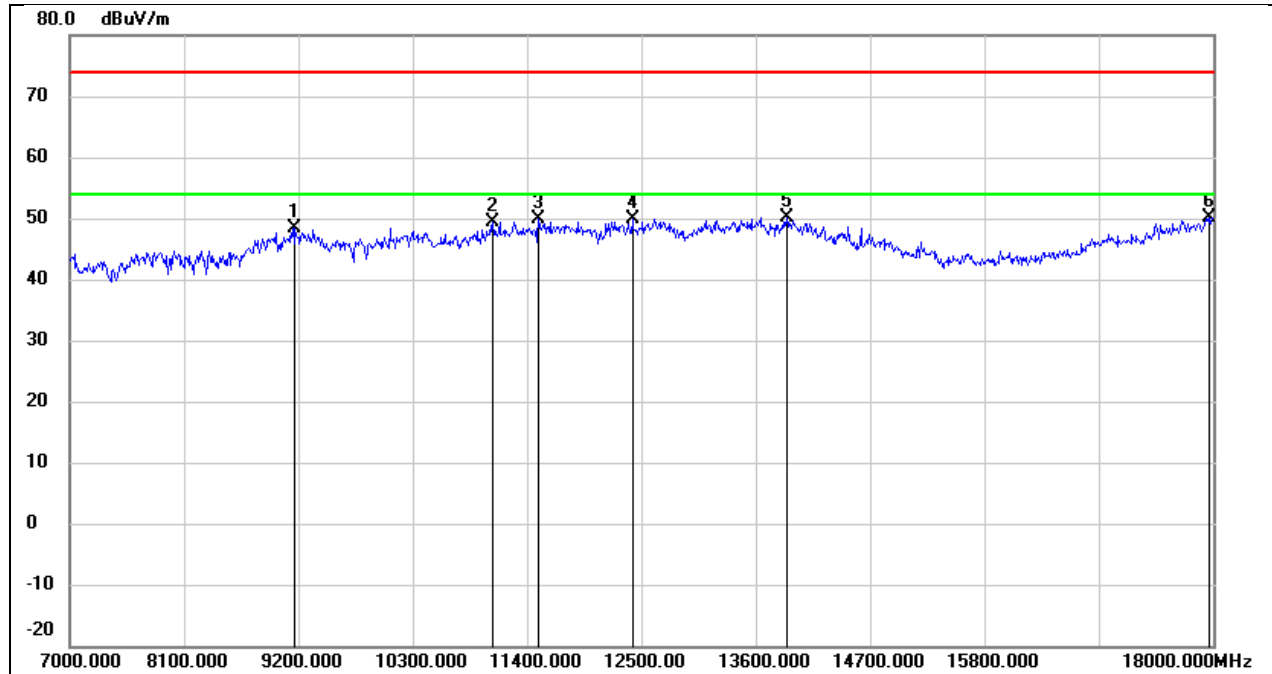


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.92	10.45	48.37	74.00	-25.63	peak
2	11070.000	34.31	15.01	49.32	74.00	-24.68	peak
3	11510.000	33.05	16.79	49.84	74.00	-24.16	peak
4	12412.000	32.16	17.81	49.97	74.00	-24.03	peak
5	13897.000	28.47	21.62	50.09	74.00	-23.91	peak
6	17956.000	24.37	25.82	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

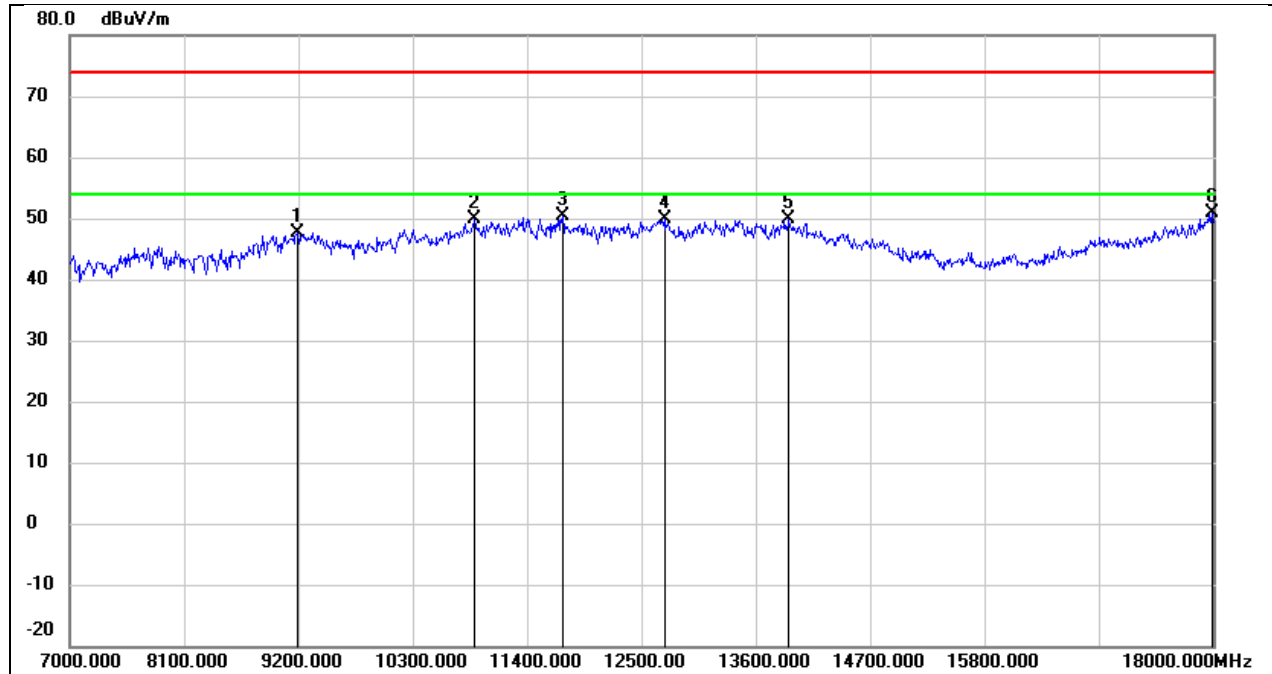


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.07	10.46	47.53	74.00	-26.47	peak
2	10894.000	35.63	14.32	49.95	74.00	-24.05	peak
3	11741.000	33.18	17.22	50.40	74.00	-23.60	peak
4	12720.000	31.83	18.09	49.92	74.00	-24.08	peak
5	13919.000	28.27	21.68	49.95	74.00	-24.05	peak
6	17989.000	24.78	26.04	50.82	74.00	-23.18	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3 V

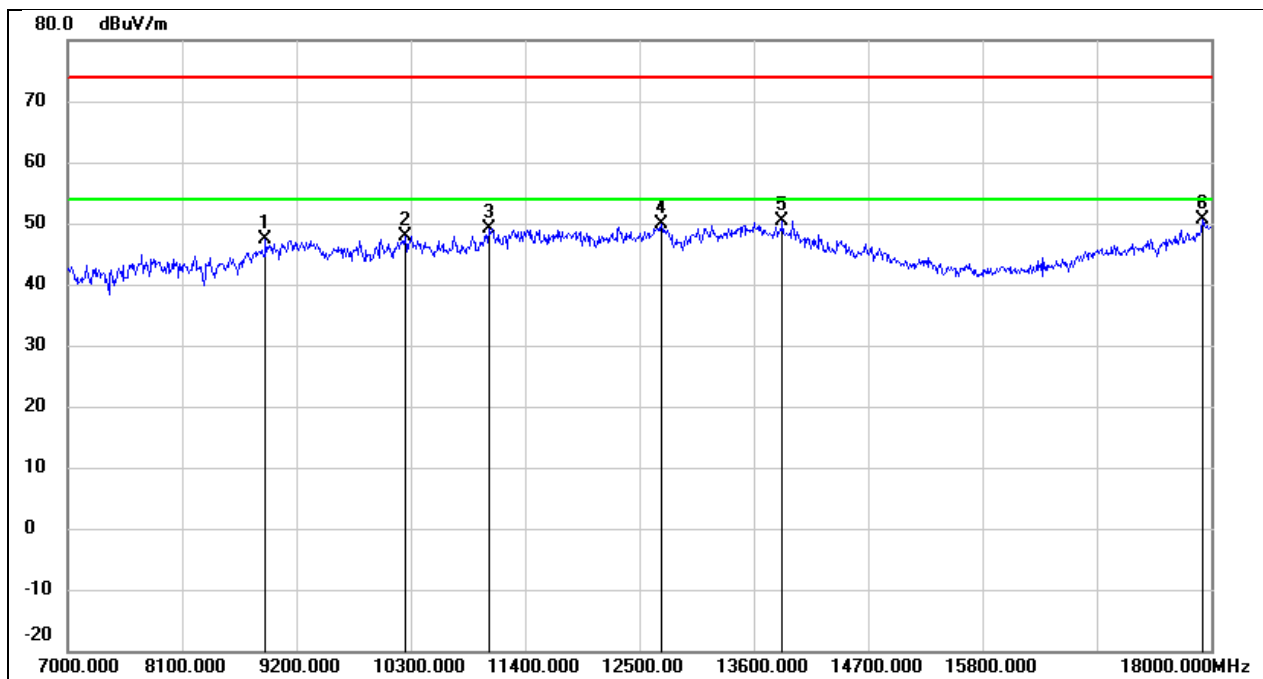


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	37.77	9.66	47.43	74.00	-26.57	peak
2	10245.000	35.60	12.28	47.88	74.00	-26.12	peak
3	11048.000	34.11	14.91	49.02	74.00	-24.98	peak
4	12709.000	31.70	18.09	49.79	74.00	-24.21	peak
5	13875.000	28.88	21.57	50.45	74.00	-23.55	peak
6	17923.000	25.15	25.60	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

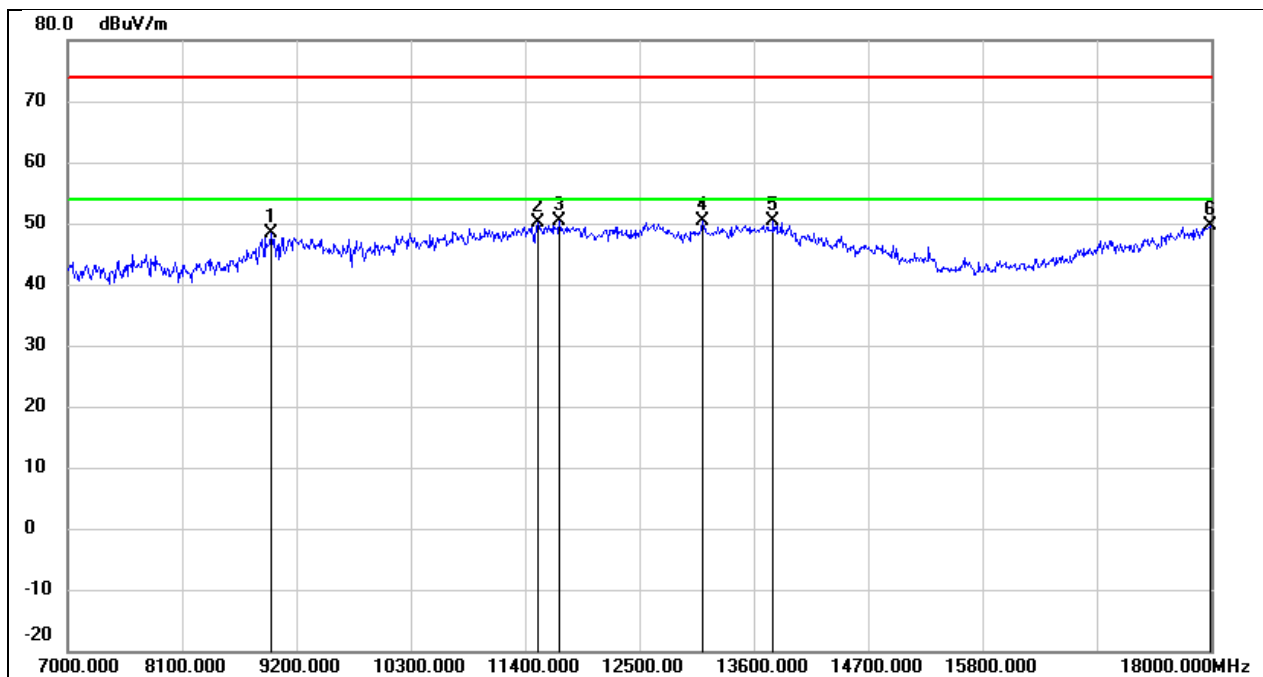


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	38.30	10.05	48.35	74.00	-25.65	peak
2	11521.000	33.23	16.82	50.05	74.00	-23.95	peak
3	11730.000	33.08	17.19	50.27	74.00	-23.73	peak
4	13105.000	31.36	18.91	50.27	74.00	-23.73	peak
5	13787.000	28.96	21.35	50.31	74.00	-23.69	peak
6	17989.000	23.56	26.04	49.60	74.00	-24.40	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3 V

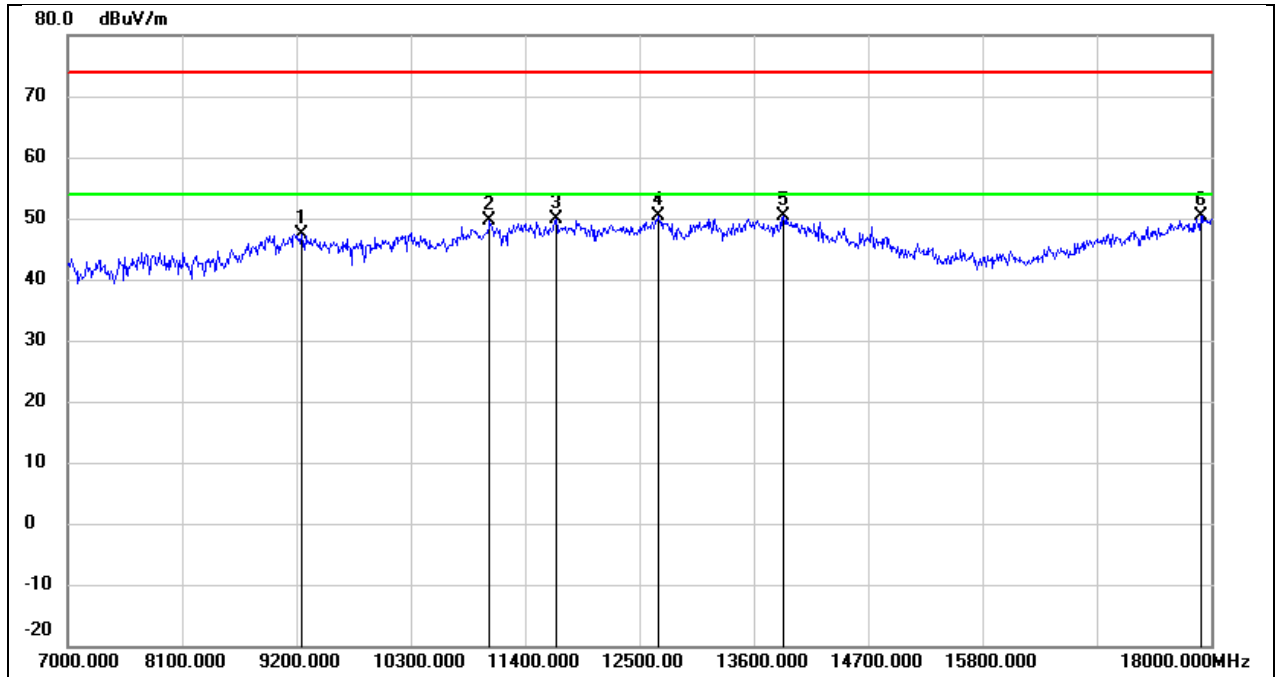


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.91	10.51	47.42	74.00	-26.58	peak
2	11059.000	34.75	14.96	49.71	74.00	-24.29	peak
3	11697.000	32.64	17.13	49.77	74.00	-24.23	peak
4	12676.000	32.26	18.05	50.31	74.00	-23.69	peak
5	13886.000	28.88	21.60	50.48	74.00	-23.52	peak
6	17901.000	24.83	25.45	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

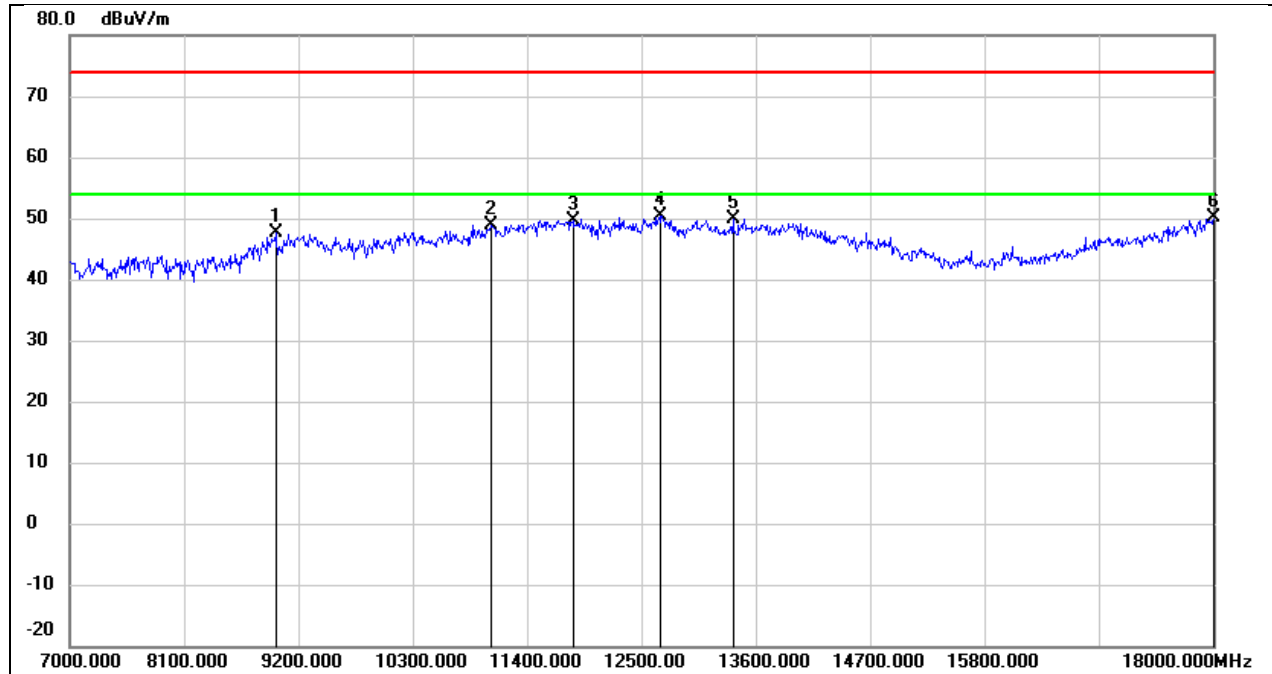


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.34	10.21	47.55	74.00	-26.45	peak
2	11059.000	33.85	14.96	48.81	74.00	-25.19	peak
3	11840.000	32.31	17.40	49.71	74.00	-24.29	peak
4	12676.000	32.36	18.05	50.41	74.00	-23.59	peak
5	13380.000	29.75	20.12	49.87	74.00	-24.13	peak
6	18000.000	24.12	26.12	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3 V

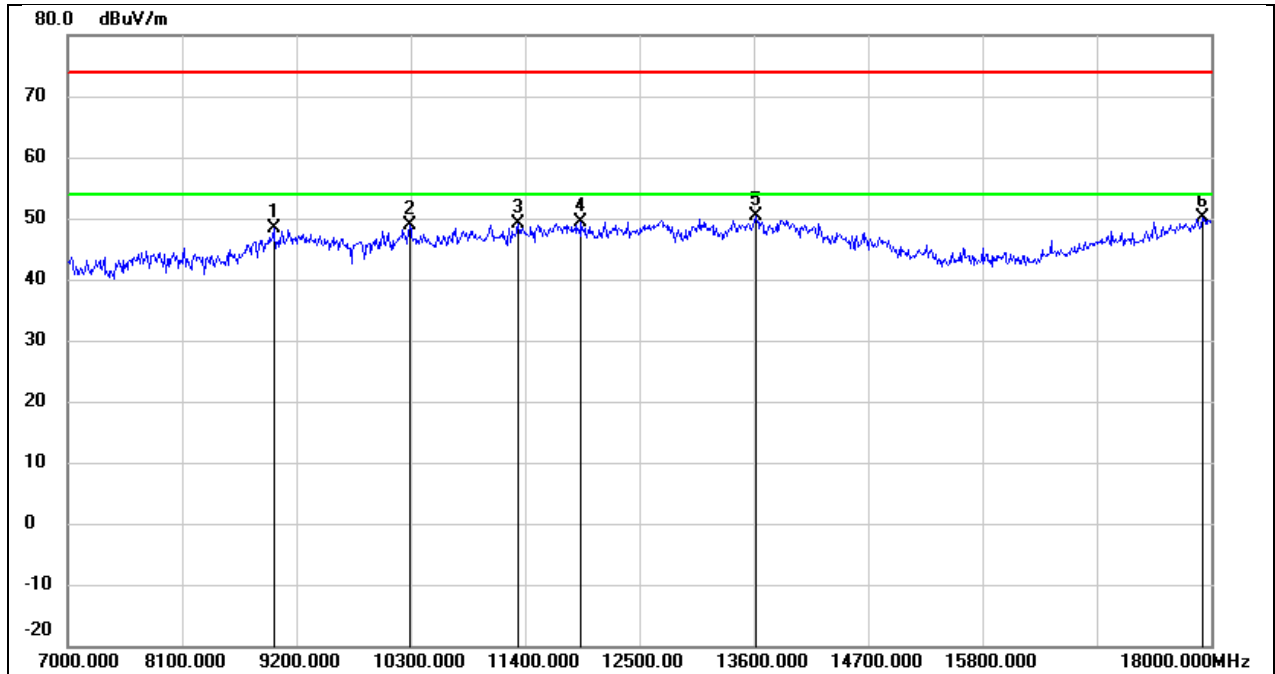


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.11	10.21	48.32	74.00	-25.68	peak
2	10289.000	36.56	12.38	48.94	74.00	-25.06	peak
3	11334.000	32.93	16.09	49.02	74.00	-24.98	peak
4	11939.000	31.87	17.59	49.46	74.00	-24.54	peak
5	13622.000	29.41	20.95	50.36	74.00	-23.64	peak
6	17912.000	24.67	25.52	50.19	74.00	-23.81	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

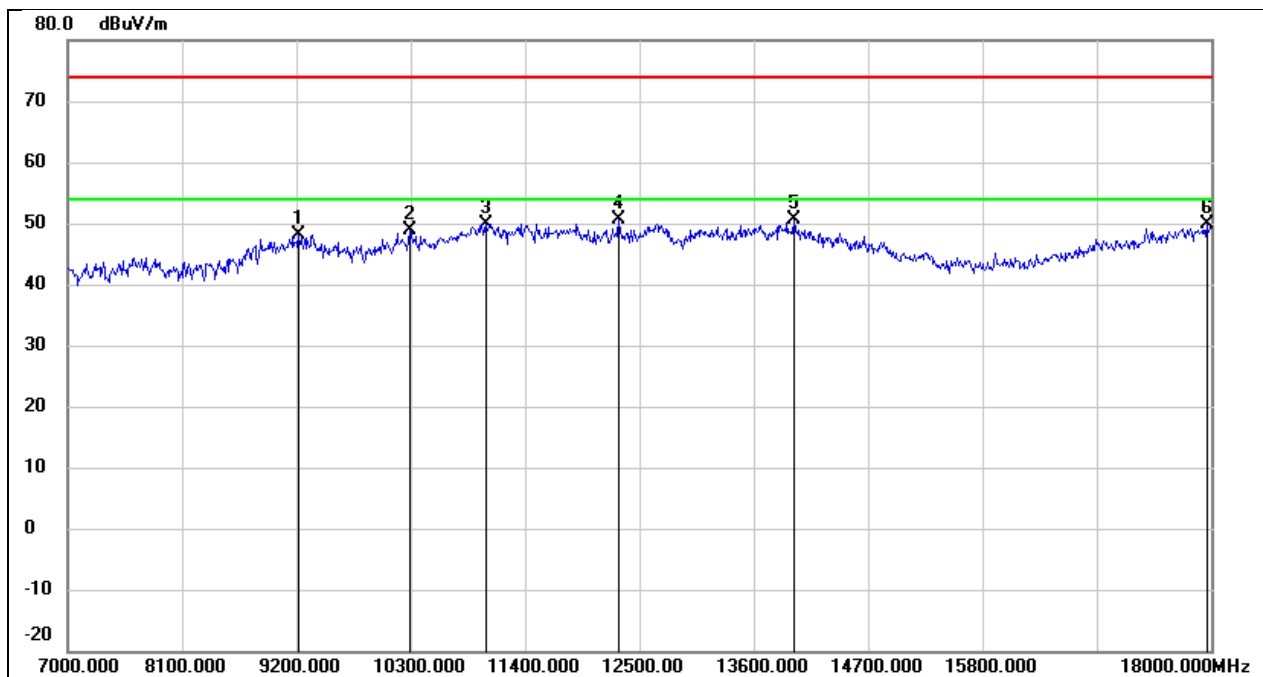


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.59	10.48	48.07	74.00	-25.93	peak
2	10289.000	36.43	12.38	48.81	74.00	-25.19	peak
3	11026.000	35.11	14.82	49.93	74.00	-24.07	peak
4	12302.000	32.74	17.78	50.52	74.00	-23.48	peak
5	13985.000	28.75	21.85	50.60	74.00	-23.40	peak
6	17956.000	24.03	25.82	49.85	74.00	-24.15	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3 V

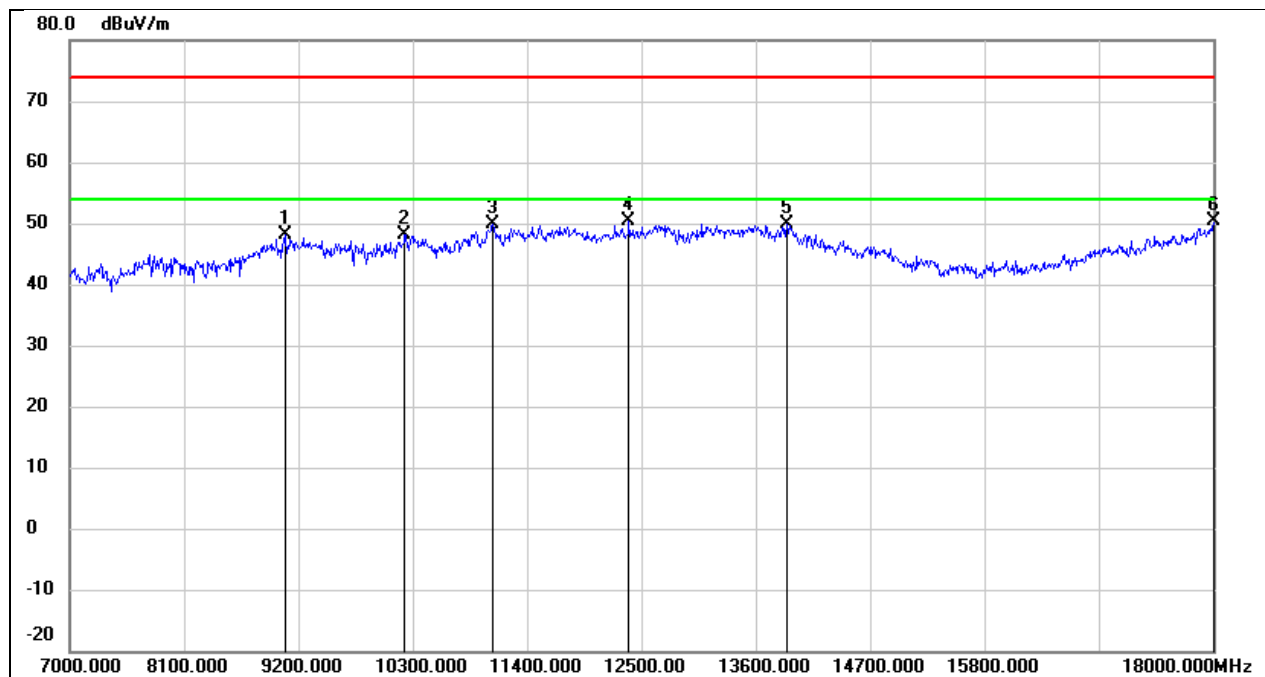


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	37.76	10.39	48.15	74.00	-25.85	peak
2	10223.000	35.96	12.24	48.20	74.00	-25.80	peak
3	11070.000	34.84	15.01	49.85	74.00	-24.15	peak
4	12379.000	32.52	17.80	50.32	74.00	-23.68	peak
5	13897.000	28.38	21.62	50.00	74.00	-24.00	peak
6	18000.000	24.15	26.12	50.27	74.00	-23.73	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

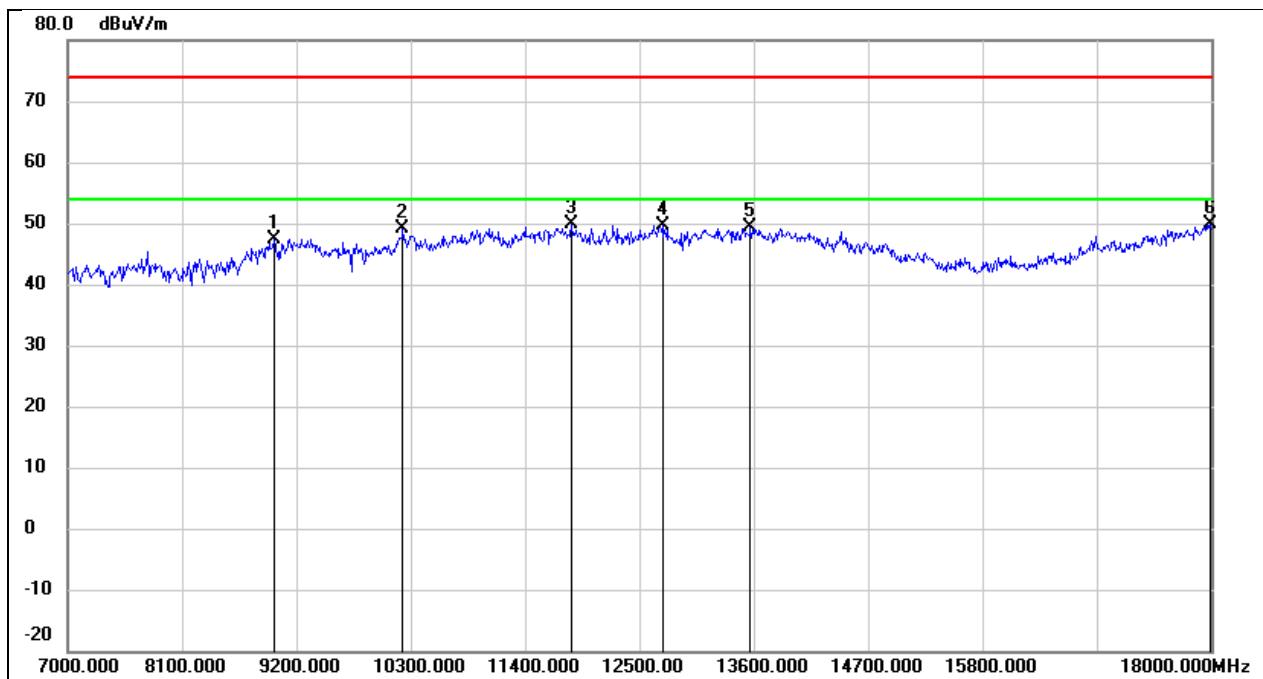


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.29	10.21	47.50	74.00	-26.50	peak
2	10223.000	36.89	12.24	49.13	74.00	-24.87	peak
3	11840.000	32.37	17.40	49.77	74.00	-24.23	peak
4	12731.000	31.56	18.12	49.68	74.00	-24.32	peak
5	13567.000	28.57	20.80	49.37	74.00	-24.63	peak
6	17989.000	23.95	26.04	49.99	74.00	-24.01	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3 V

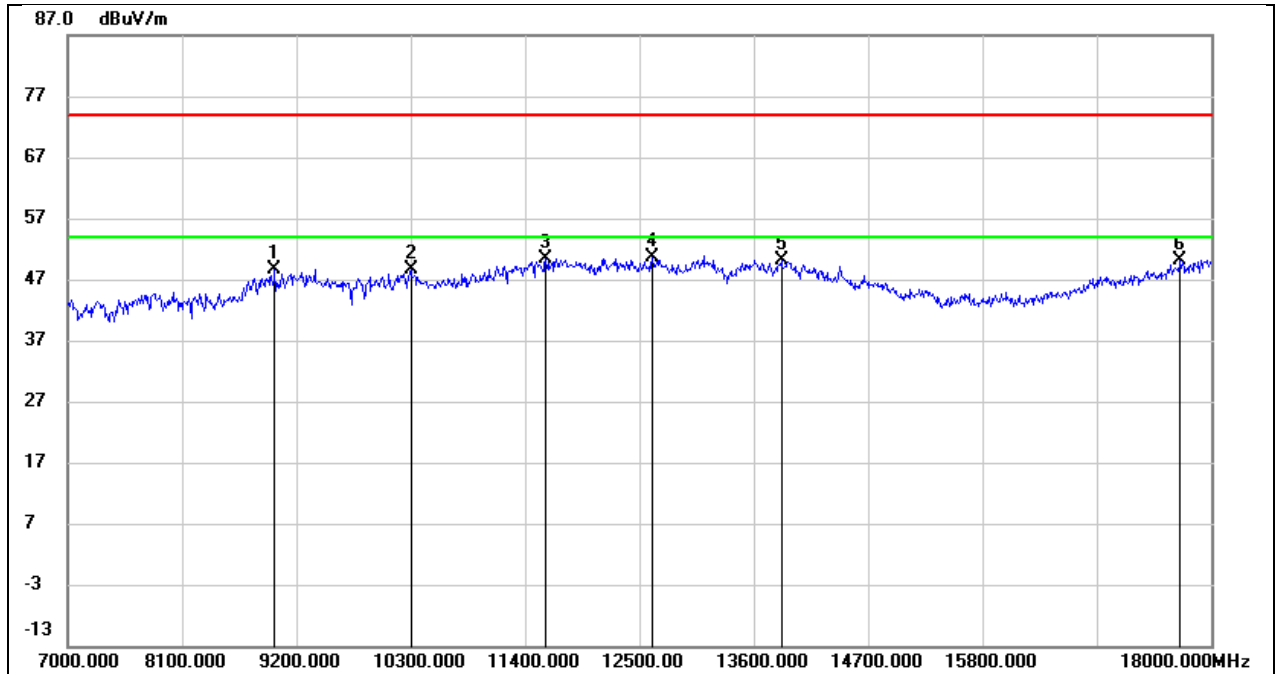


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	38.41	10.28	48.69	74.00	-25.31	peak
2	10300.000	36.16	12.40	48.56	74.00	-25.44	peak
3	11598.000	33.46	16.96	50.42	74.00	-23.58	peak
4	12621.000	32.60	17.98	50.58	74.00	-23.42	peak
5	13864.000	28.62	21.53	50.15	74.00	-23.85	peak
6	17703.000	26.06	24.09	50.15	74.00	-23.85	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

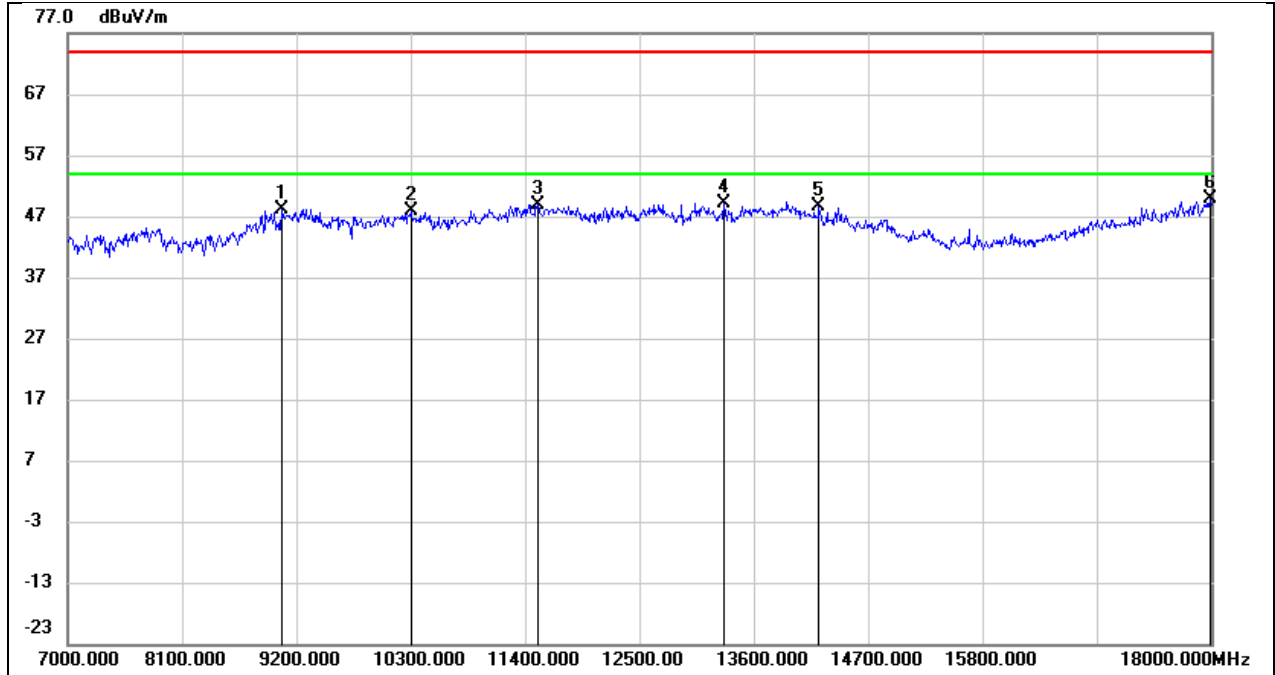


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.76	10.38	48.14	74.00	-25.86	peak
2	10300.000	35.40	12.40	47.80	74.00	-26.20	peak
3	11521.000	32.14	16.82	48.96	74.00	-25.04	peak
4	13314.000	29.42	19.83	49.25	74.00	-24.75	peak
5	14227.000	27.78	20.93	48.71	74.00	-25.29	peak
6	17989.000	23.79	26.04	49.83	74.00	-24.17	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3 V

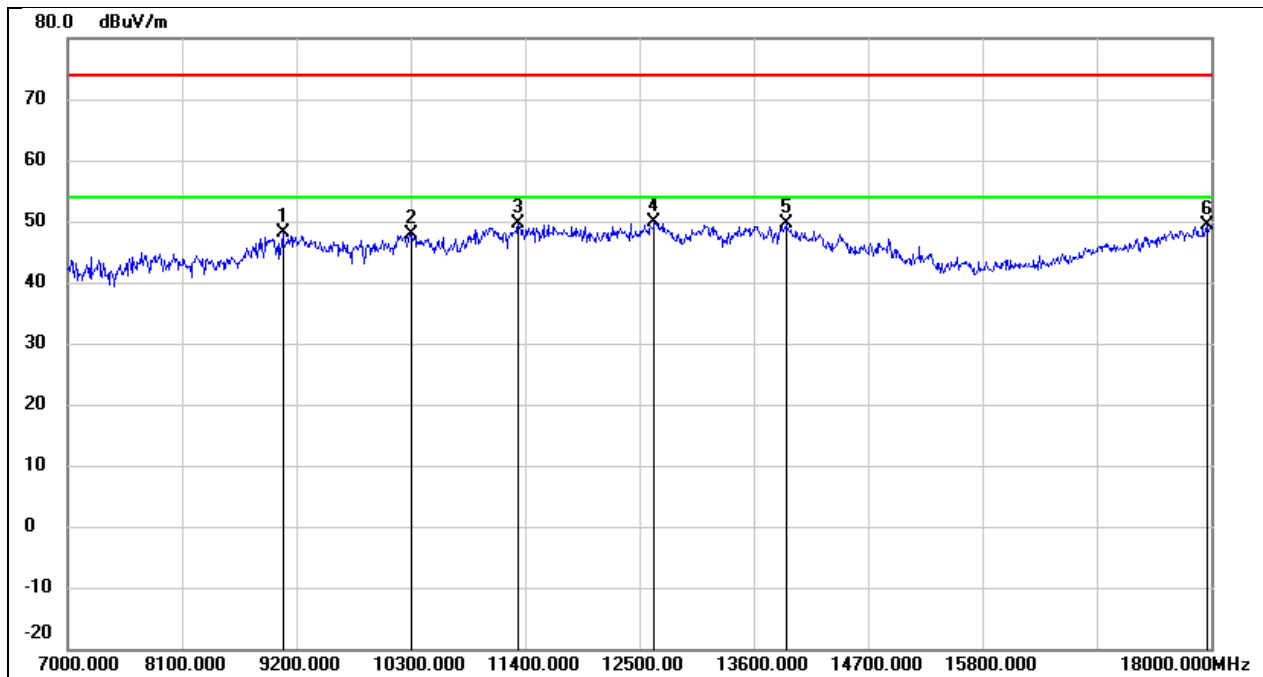


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	37.78	10.39	48.17	74.00	-25.83	peak
2	10311.000	35.49	12.42	47.91	74.00	-26.09	peak
3	11334.000	33.54	16.09	49.63	74.00	-24.37	peak
4	12643.000	31.79	18.01	49.80	74.00	-24.20	peak
5	13919.000	28.06	21.68	49.74	74.00	-24.26	peak
6	17967.000	23.46	25.89	49.35	74.00	-24.65	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

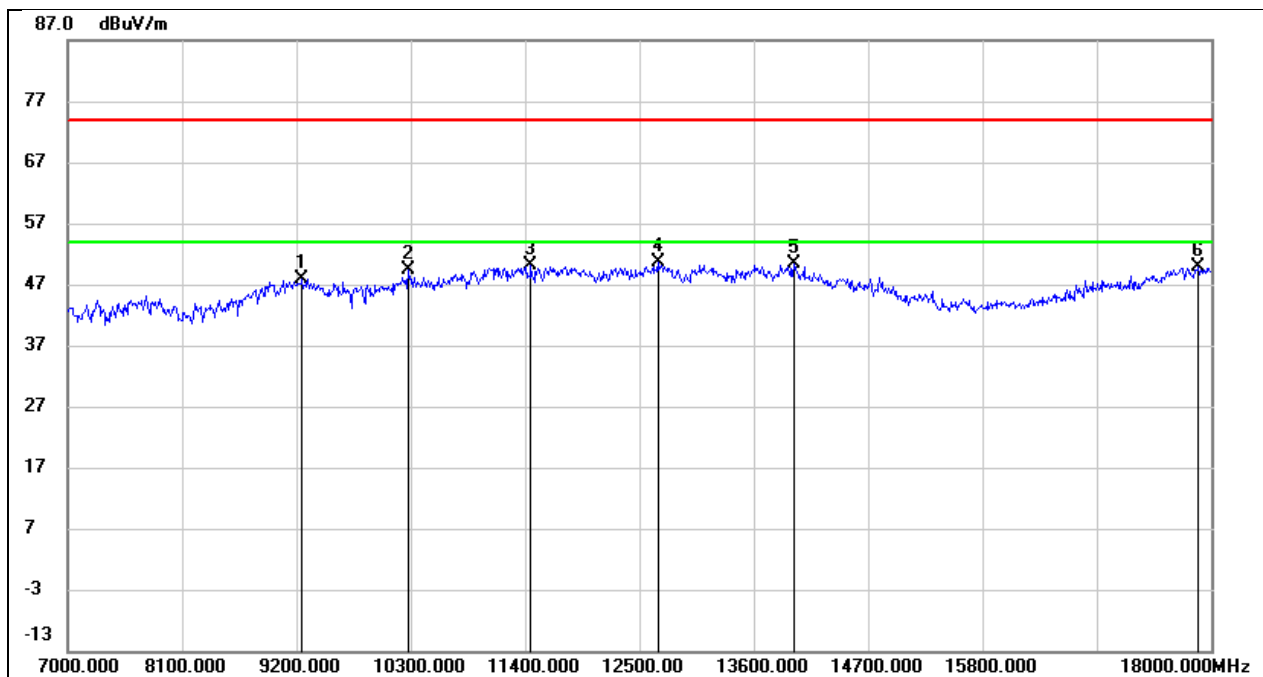


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.44	10.51	47.95	74.00	-26.05	peak
2	10278.000	37.07	12.35	49.42	74.00	-24.58	peak
3	11455.000	33.49	16.58	50.07	74.00	-23.93	peak
4	12676.000	32.64	18.05	50.69	74.00	-23.31	peak
5	13985.000	28.60	21.85	50.45	74.00	-23.55	peak
6	17879.000	24.48	25.29	49.77	74.00	-24.23	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3 V

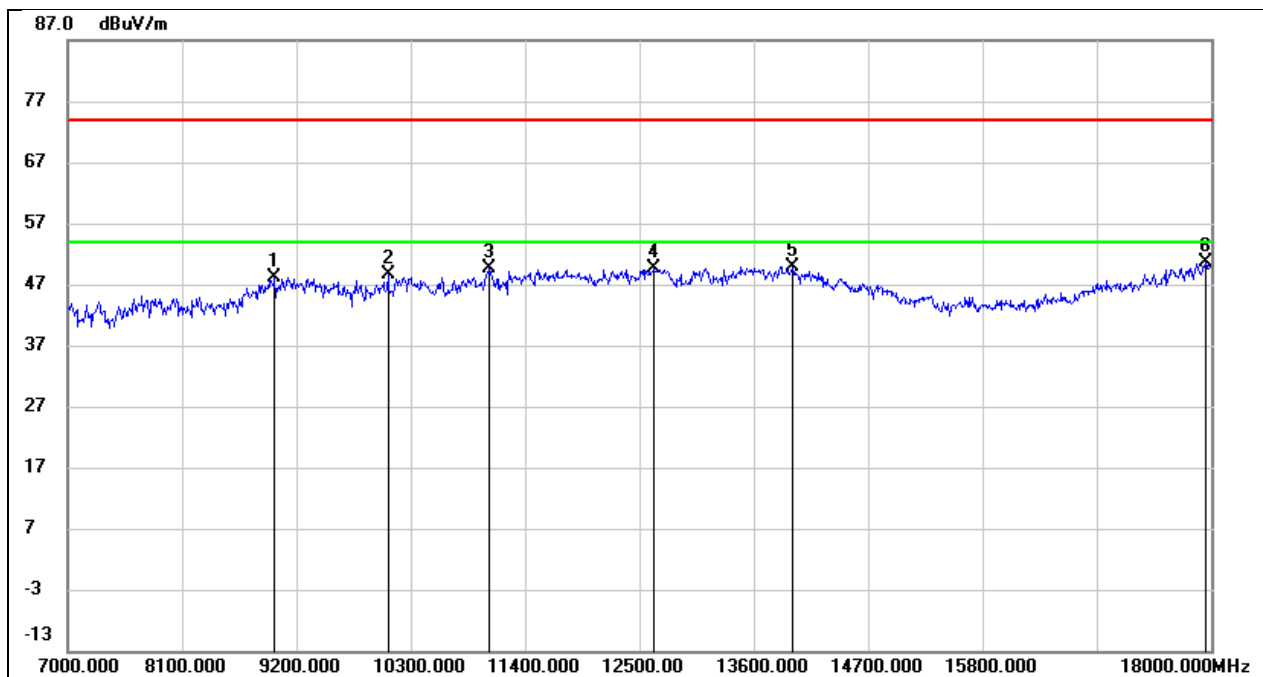


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.96	10.28	48.24	74.00	-25.76	peak
2	10080.000	36.59	11.93	48.52	74.00	-25.48	peak
3	11048.000	34.70	14.91	49.61	74.00	-24.39	peak
4	12643.000	31.60	18.01	49.61	74.00	-24.39	peak
5	13974.000	27.99	21.82	49.81	74.00	-24.19	peak
6	17945.000	24.86	25.75	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

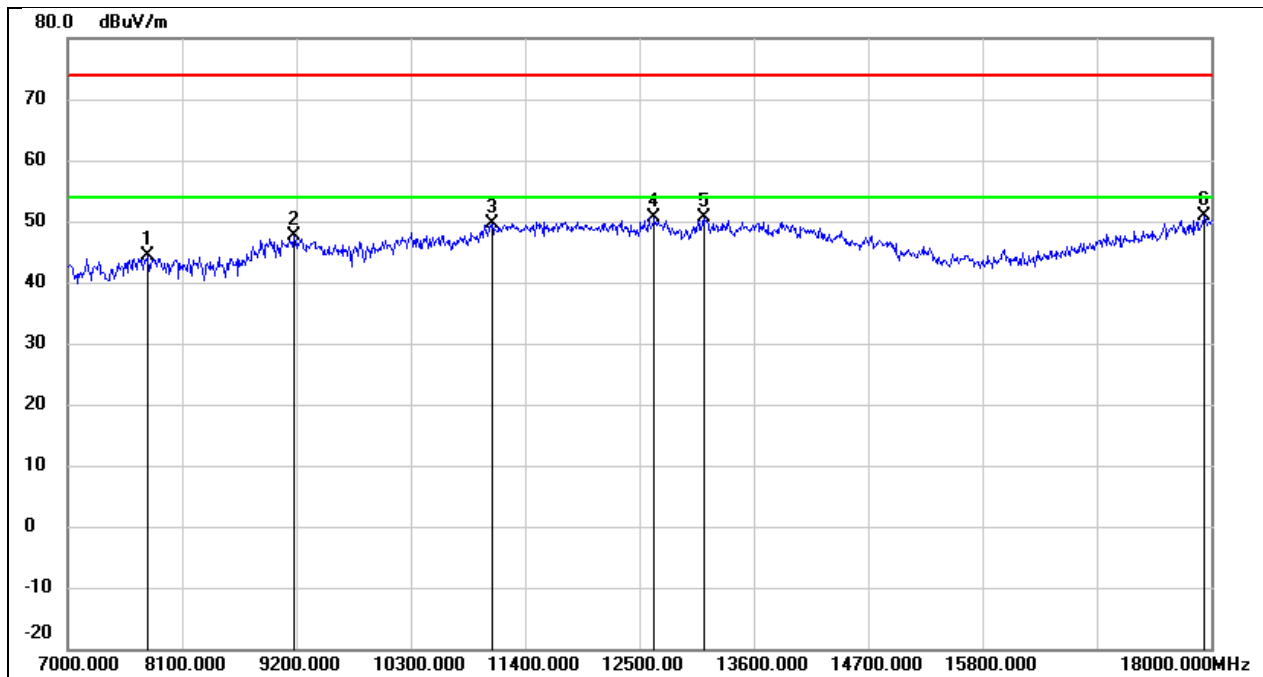


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	37.74	6.63	44.37	74.00	-29.63	peak
2	9178.000	37.25	10.45	47.70	74.00	-26.30	peak
3	11081.000	34.59	15.05	49.64	74.00	-24.36	peak
4	12643.000	32.56	18.01	50.57	74.00	-23.43	peak
5	13116.000	31.77	18.96	50.73	74.00	-23.27	peak
6	17934.000	25.21	25.67	50.88	74.00	-23.12	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3 V

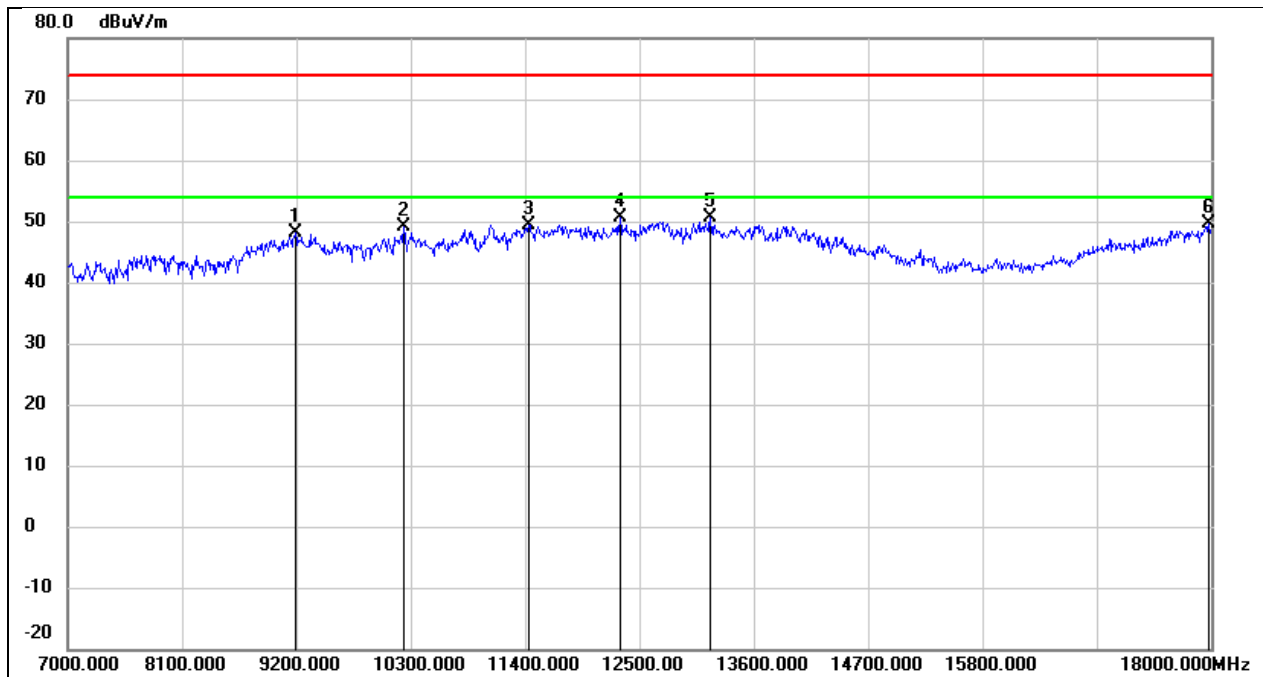


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.70	10.46	48.16	74.00	-25.84	peak
2	10234.000	36.98	12.26	49.24	74.00	-24.76	peak
3	11433.000	32.88	16.50	49.38	74.00	-24.62	peak
4	12313.000	32.78	17.78	50.56	74.00	-23.44	peak
5	13182.000	31.46	19.24	50.70	74.00	-23.30	peak
6	17978.000	23.78	25.97	49.75	74.00	-24.25	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

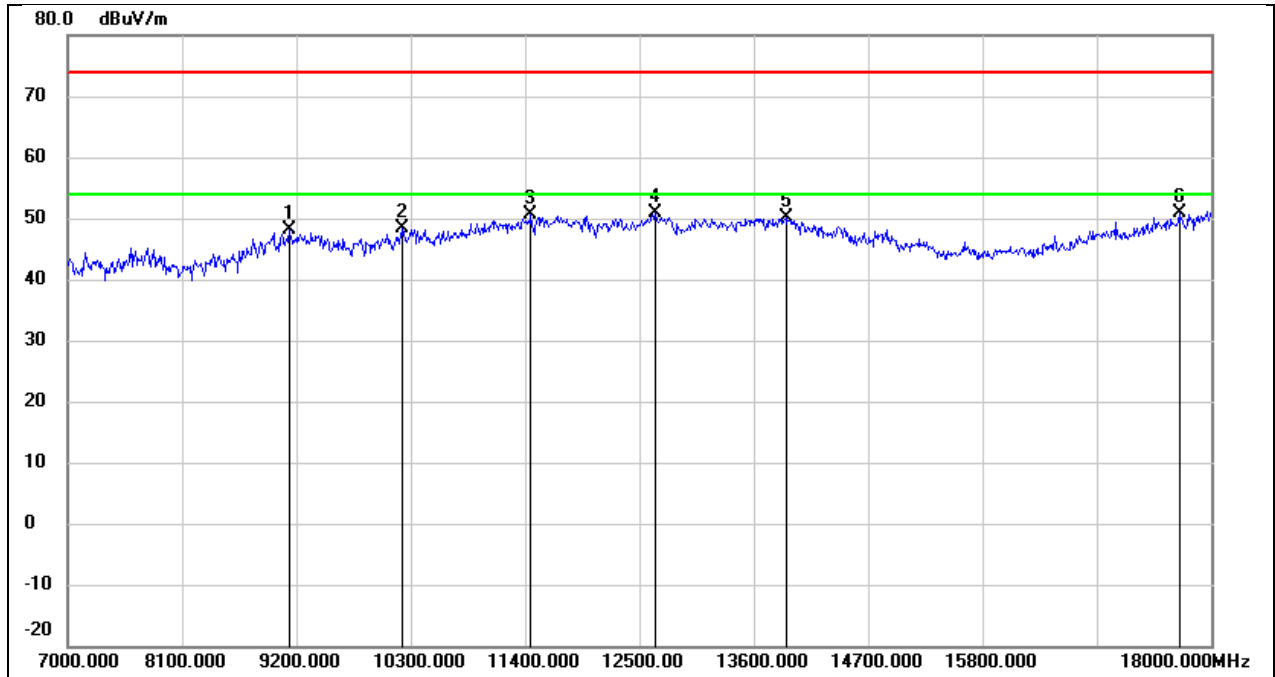


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.76	10.41	48.17	74.00	-25.83	peak
2	10223.000	36.11	12.24	48.35	74.00	-25.65	peak
3	11455.000	34.11	16.58	50.69	74.00	-23.31	peak
4	12654.000	32.96	18.01	50.97	74.00	-23.03	peak
5	13908.000	28.40	21.66	50.06	74.00	-23.94	peak
6	17692.000	26.88	24.01	50.89	74.00	-23.11	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3 V

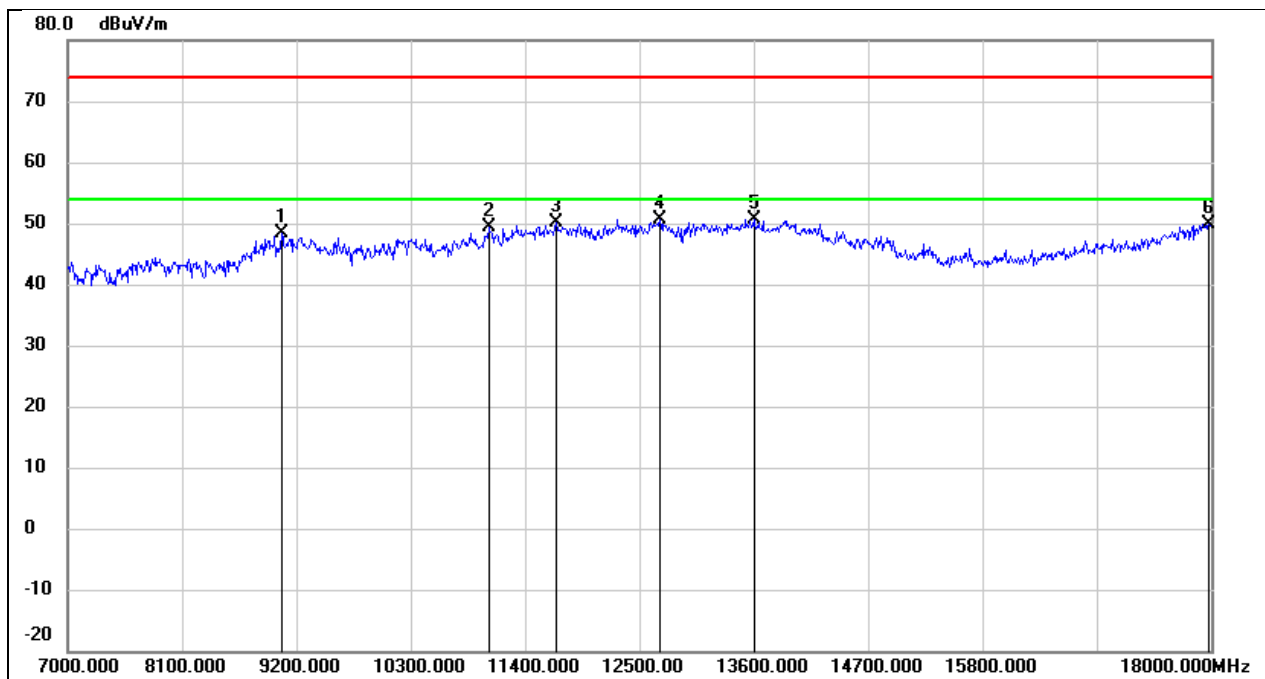


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.02	10.38	48.40	74.00	-25.60	peak
2	11048.000	34.44	14.91	49.35	74.00	-24.65	peak
3	11697.000	32.89	17.13	50.02	74.00	-23.98	peak
4	12698.000	32.67	18.08	50.75	74.00	-23.25	peak
5	13600.000	29.70	20.89	50.59	74.00	-23.41	peak
6	17978.000	24.01	25.97	49.98	74.00	-24.02	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

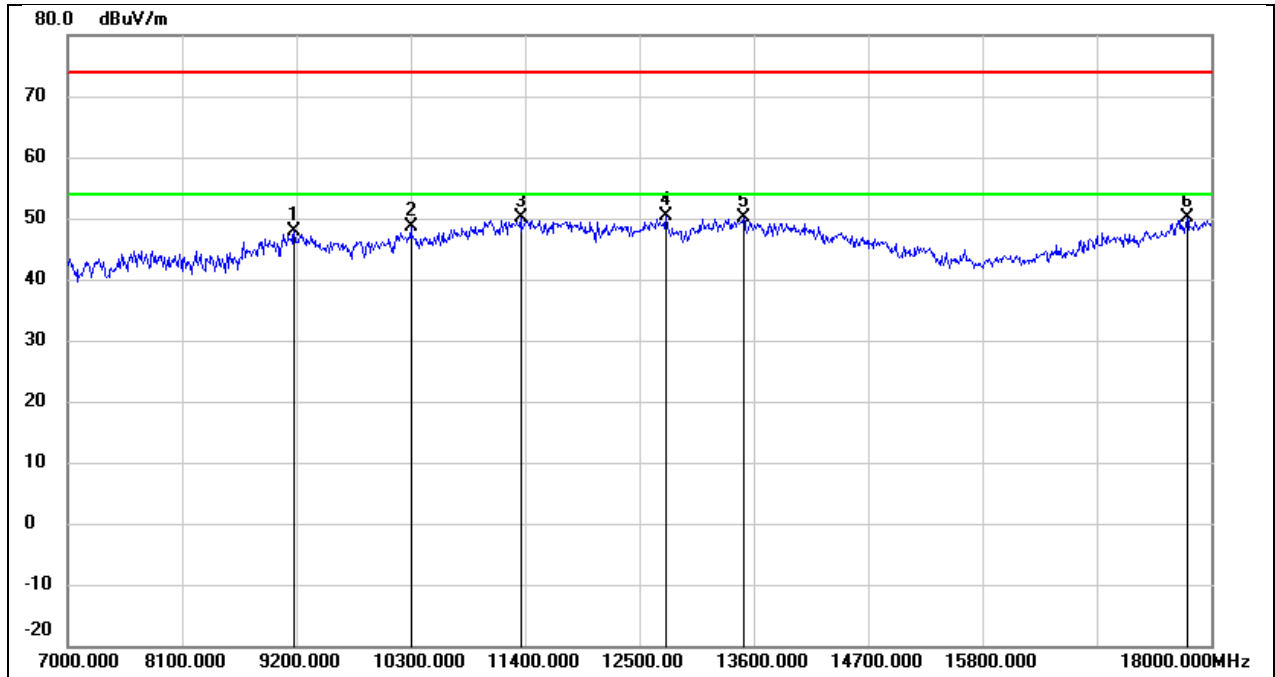


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.36	10.45	47.81	74.00	-26.19	peak
2	10300.000	36.23	12.40	48.63	74.00	-25.37	peak
3	11356.000	33.91	16.19	50.10	74.00	-23.90	peak
4	12753.000	32.13	18.14	50.27	74.00	-23.73	peak
5	13501.000	29.61	20.64	50.25	74.00	-23.75	peak
6	17769.000	25.64	24.53	50.17	74.00	-23.83	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3 V

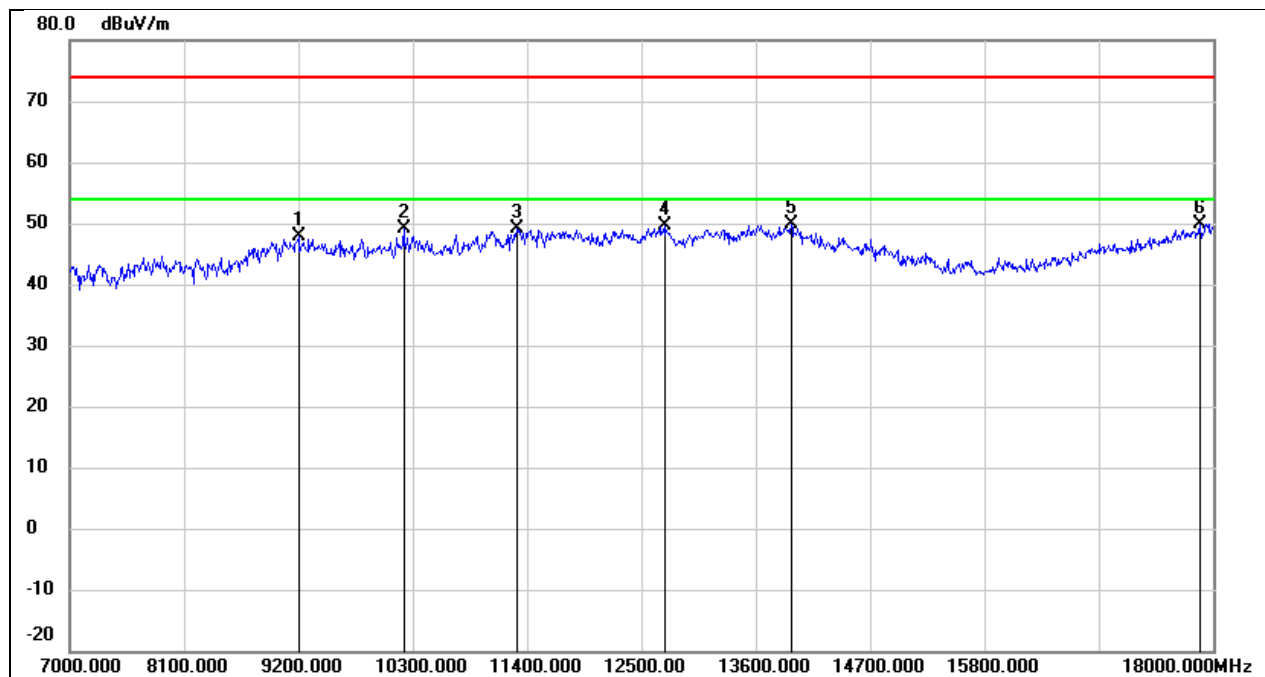


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.49	10.46	47.95	74.00	-26.05	peak
2	10212.000	36.84	12.21	49.05	74.00	-24.95	peak
3	11301.000	33.30	15.95	49.25	74.00	-24.75	peak
4	12731.000	31.58	18.12	49.70	74.00	-24.30	peak
5	13941.000	28.06	21.73	49.79	74.00	-24.21	peak
6	17868.000	24.69	25.22	49.91	74.00	-24.09	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

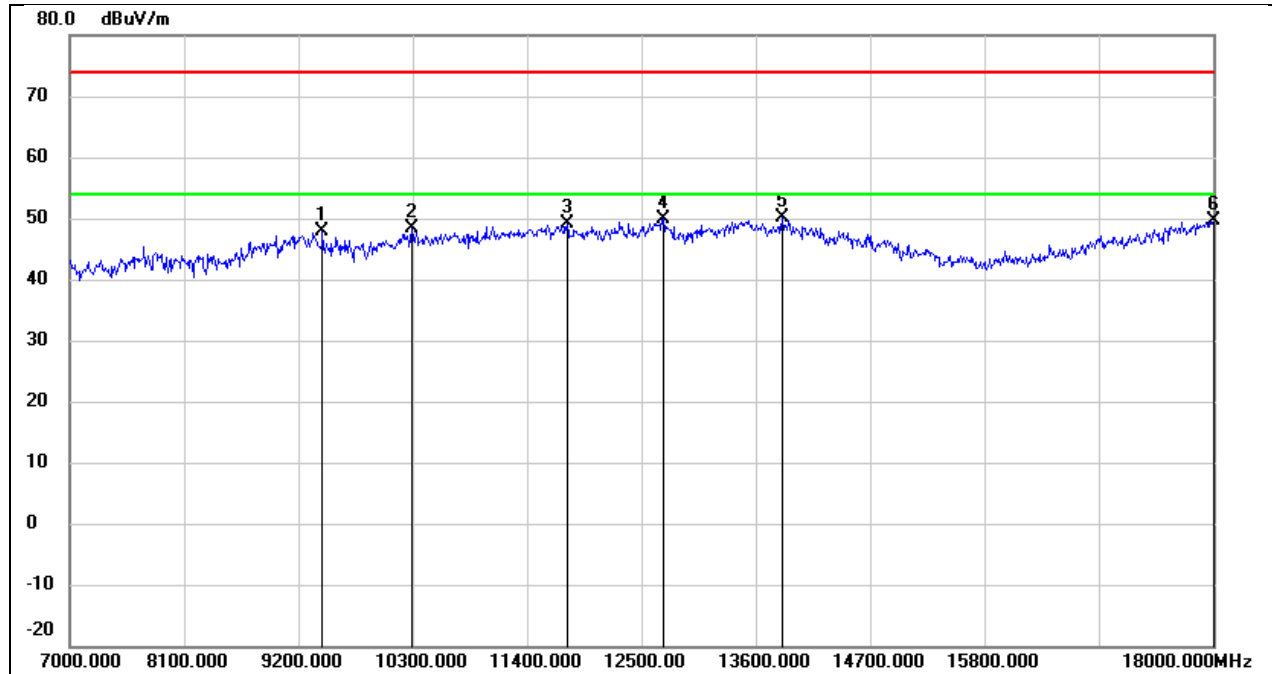


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	37.27	10.61	47.88	74.00	-26.12	peak
2	10289.000	35.96	12.38	48.34	74.00	-25.66	peak
3	11785.000	31.78	17.30	49.08	74.00	-24.92	peak
4	12709.000	31.72	18.09	49.81	74.00	-24.19	peak
5	13853.000	28.64	21.52	50.16	74.00	-23.84	peak
6	18000.000	23.48	26.12	49.60	74.00	-24.40	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3 V

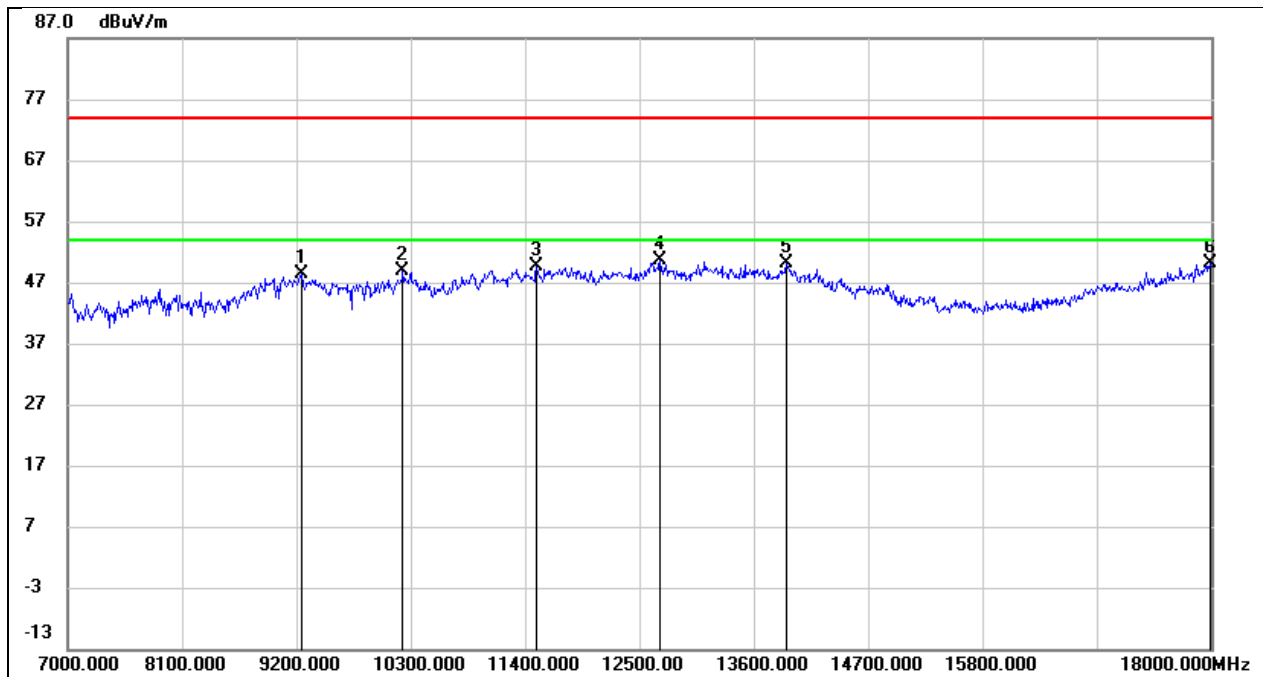


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.77	10.50	48.27	74.00	-25.73	peak
2	10223.000	36.52	12.24	48.76	74.00	-25.24	peak
3	11510.000	32.76	16.79	49.55	74.00	-24.45	peak
4	12698.000	32.52	18.08	50.60	74.00	-23.40	peak
5	13908.000	28.40	21.66	50.06	74.00	-23.94	peak
6	17989.000	24.11	26.04	50.15	74.00	-23.85	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

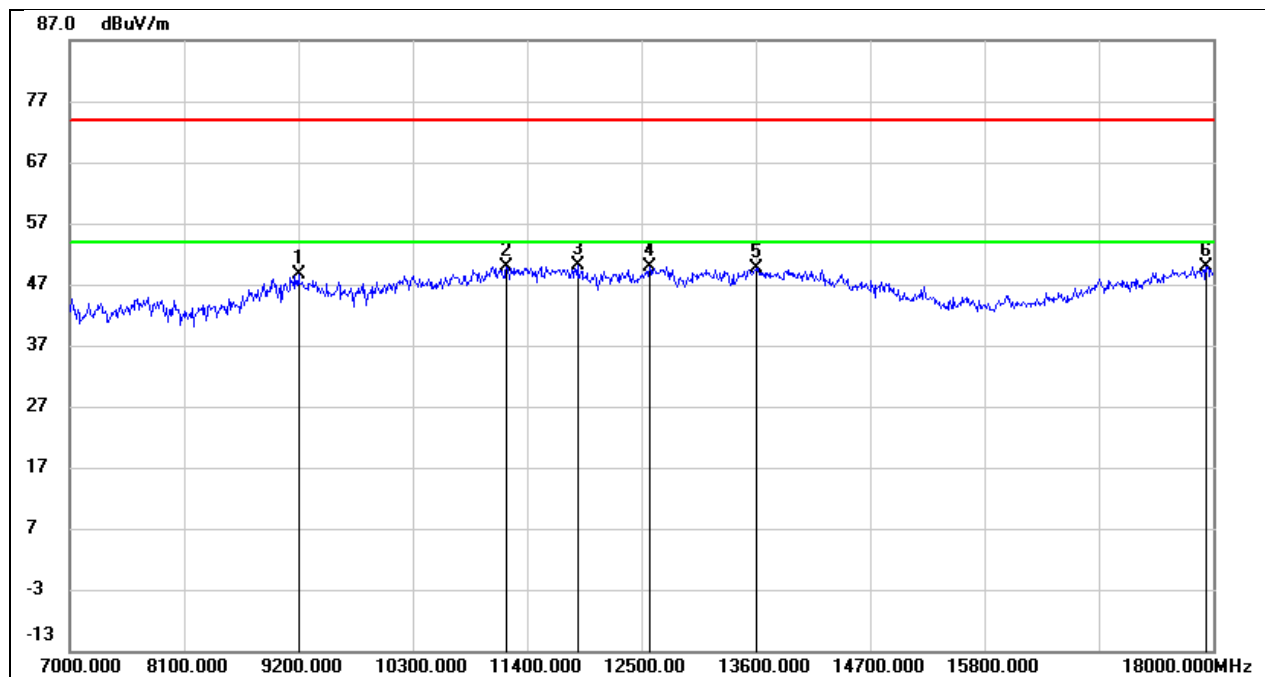


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.21	10.46	48.67	74.00	-25.33	peak
2	11202.000	34.23	15.55	49.78	74.00	-24.22	peak
3	11884.000	32.55	17.48	50.03	74.00	-23.97	peak
4	12577.000	31.85	17.93	49.78	74.00	-24.22	peak
5	13600.000	28.76	20.89	49.65	74.00	-24.35	peak
6	17934.000	24.19	25.67	49.86	74.00	-24.14	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3 V

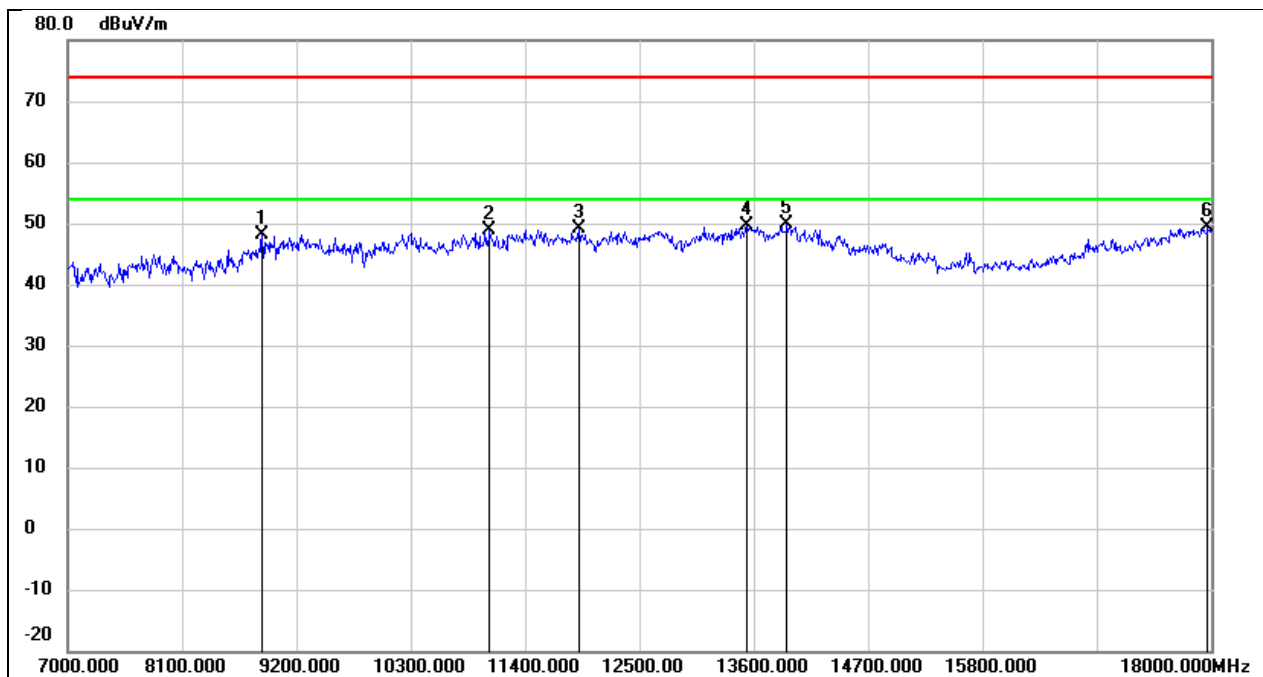


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	38.69	9.44	48.13	74.00	-25.87	peak
2	11059.000	33.81	14.96	48.77	74.00	-25.23	peak
3	11917.000	31.48	17.54	49.02	74.00	-24.98	peak
4	13534.000	28.82	20.73	49.55	74.00	-24.45	peak
5	13919.000	28.19	21.68	49.87	74.00	-24.13	peak
6	17967.000	23.40	25.89	49.29	74.00	-24.71	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

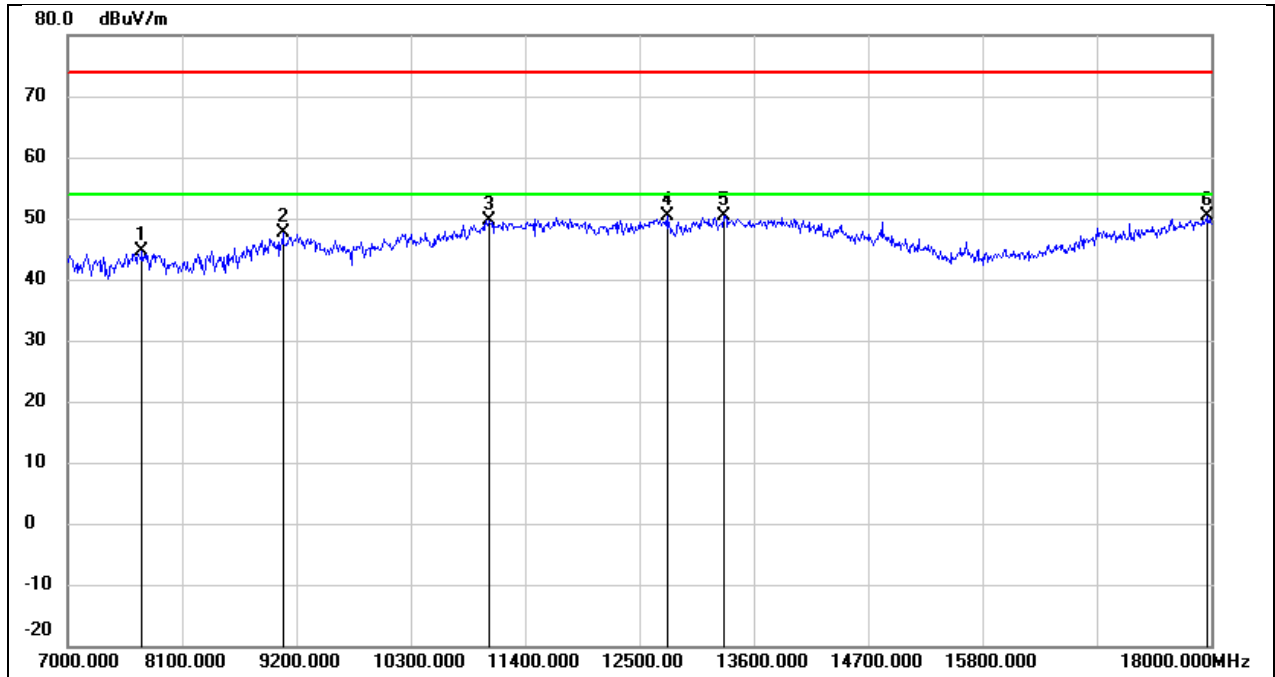


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7715.000	37.90	6.68	44.58	74.00	-29.42	peak
2	9068.000	37.24	10.39	47.63	74.00	-26.37	peak
3	11048.000	34.78	14.91	49.69	74.00	-24.31	peak
4	12764.000	32.17	18.16	50.33	74.00	-23.67	peak
5	13314.000	30.51	19.83	50.34	74.00	-23.66	peak
6	17956.000	24.63	25.82	50.45	74.00	-23.55	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3 V

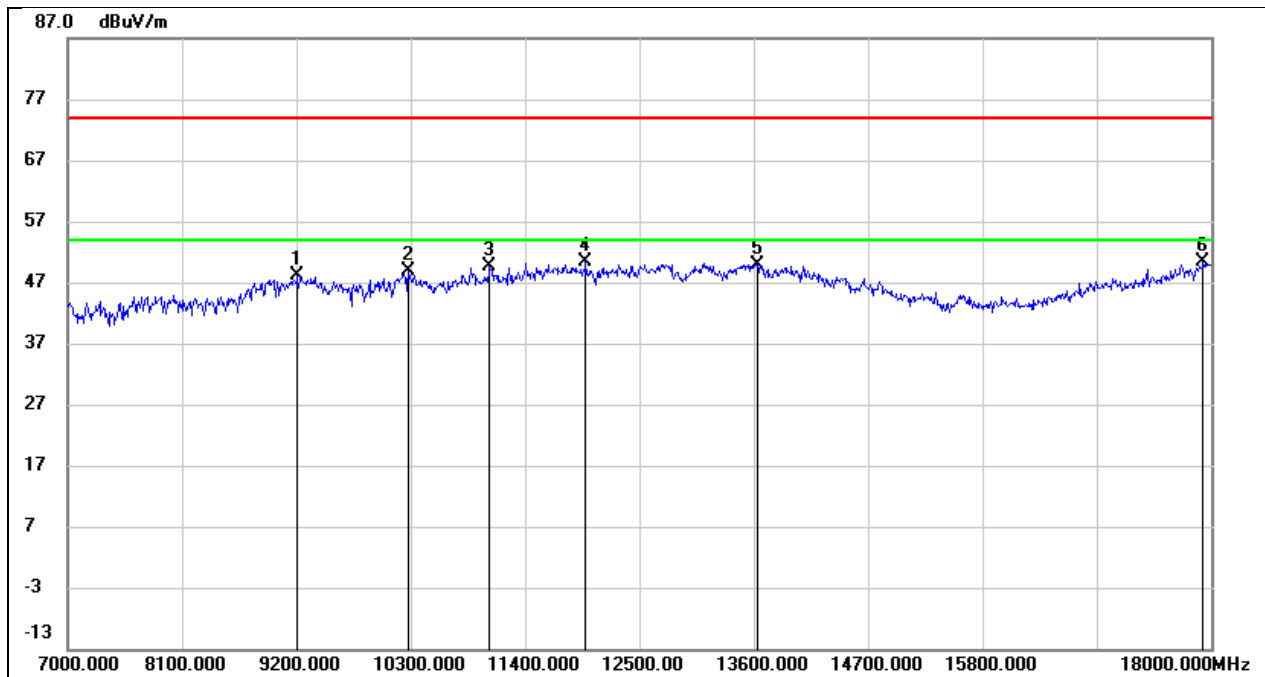


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.72	10.47	48.19	74.00	-25.81	peak
2	10278.000	36.43	12.35	48.78	74.00	-25.22	peak
3	11059.000	34.79	14.96	49.75	74.00	-24.25	peak
4	11983.000	32.69	17.67	50.36	74.00	-23.64	peak
5	13633.000	29.01	20.97	49.98	74.00	-24.02	peak
6	17923.000	24.75	25.60	50.35	74.00	-23.65	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

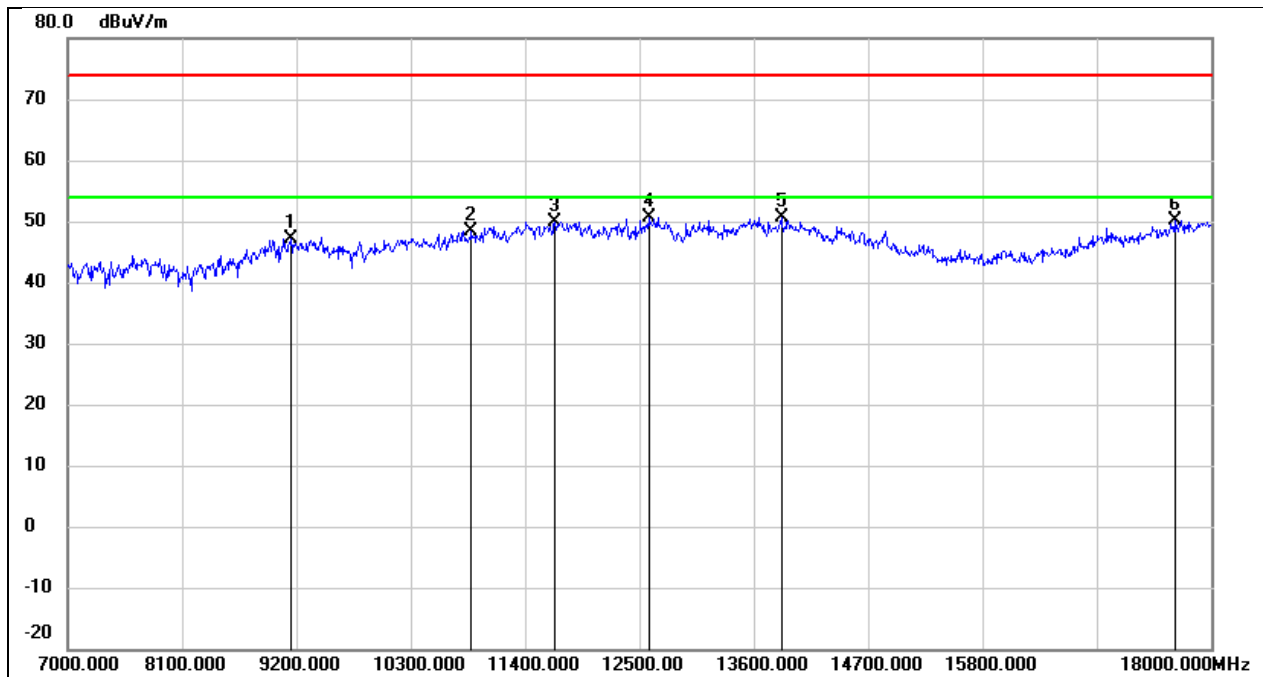


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.69	10.43	47.12	74.00	-26.88	peak
2	10883.000	34.18	14.27	48.45	74.00	-25.55	peak
3	11686.000	32.81	17.12	49.93	74.00	-24.07	peak
4	12588.000	32.72	17.94	50.66	74.00	-23.34	peak
5	13864.000	29.08	21.53	50.61	74.00	-23.39	peak
6	17648.000	26.36	23.72	50.08	74.00	-23.92	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3 V

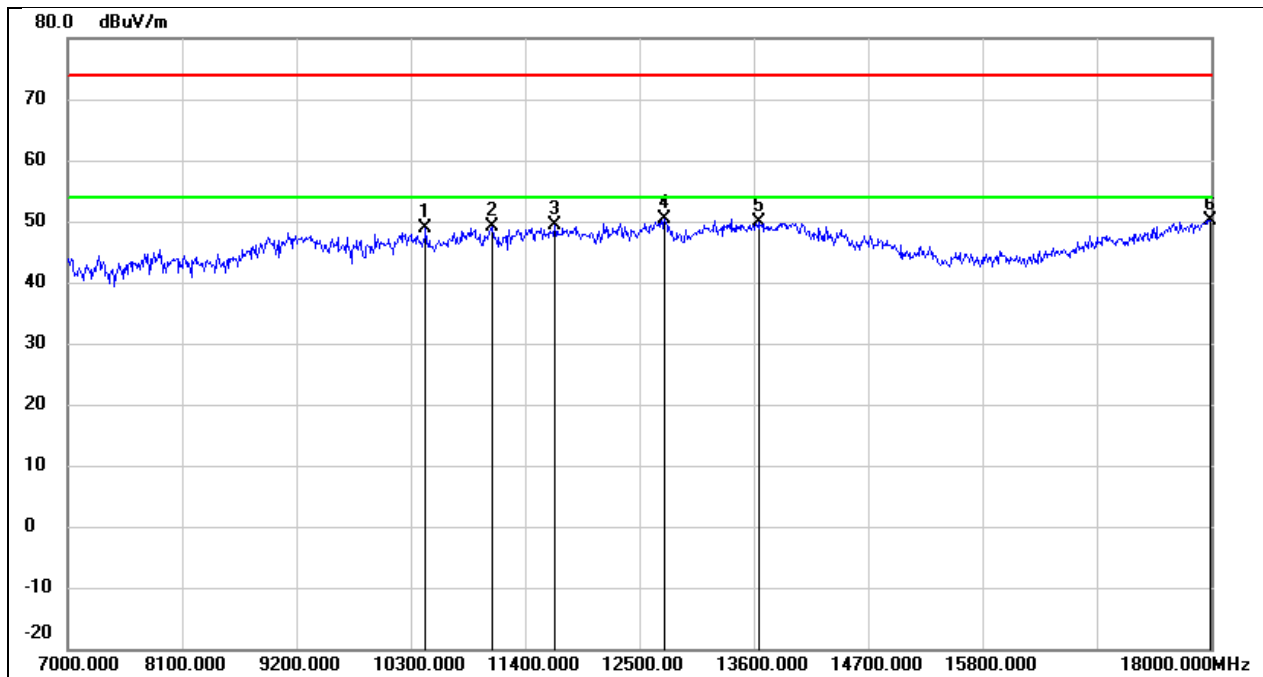


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10443.000	36.06	12.70	48.76	74.00	-25.24	peak
2	11081.000	34.09	15.05	49.14	74.00	-24.86	peak
3	11686.000	32.17	17.12	49.29	74.00	-24.71	peak
4	12742.000	32.15	18.13	50.28	74.00	-23.72	peak
5	13644.000	28.85	20.99	49.84	74.00	-24.16	peak
6	17989.000	24.21	26.04	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

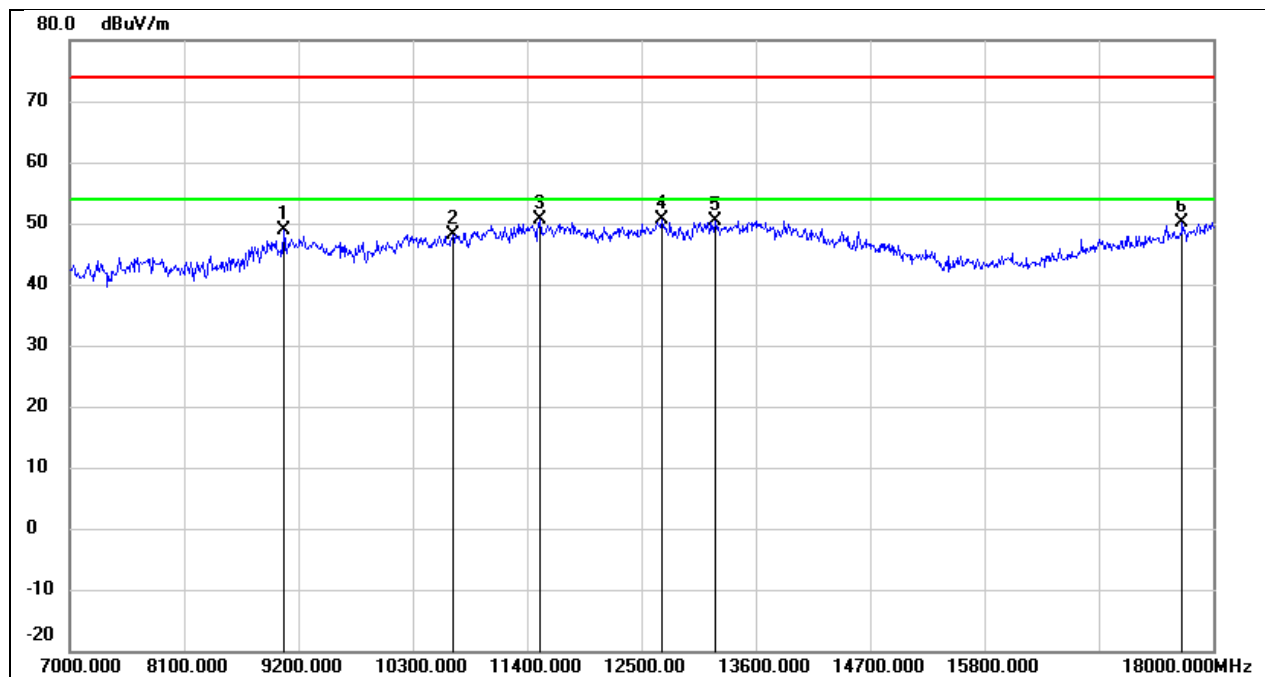


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.51	10.38	48.89	74.00	-25.11	peak
2	10685.000	34.67	13.53	48.20	74.00	-25.80	peak
3	11521.000	33.72	16.82	50.54	74.00	-23.46	peak
4	12698.000	32.57	18.08	50.65	74.00	-23.35	peak
5	13215.000	31.08	19.39	50.47	74.00	-23.53	peak
6	17703.000	26.09	24.09	50.18	74.00	-23.82	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3 V

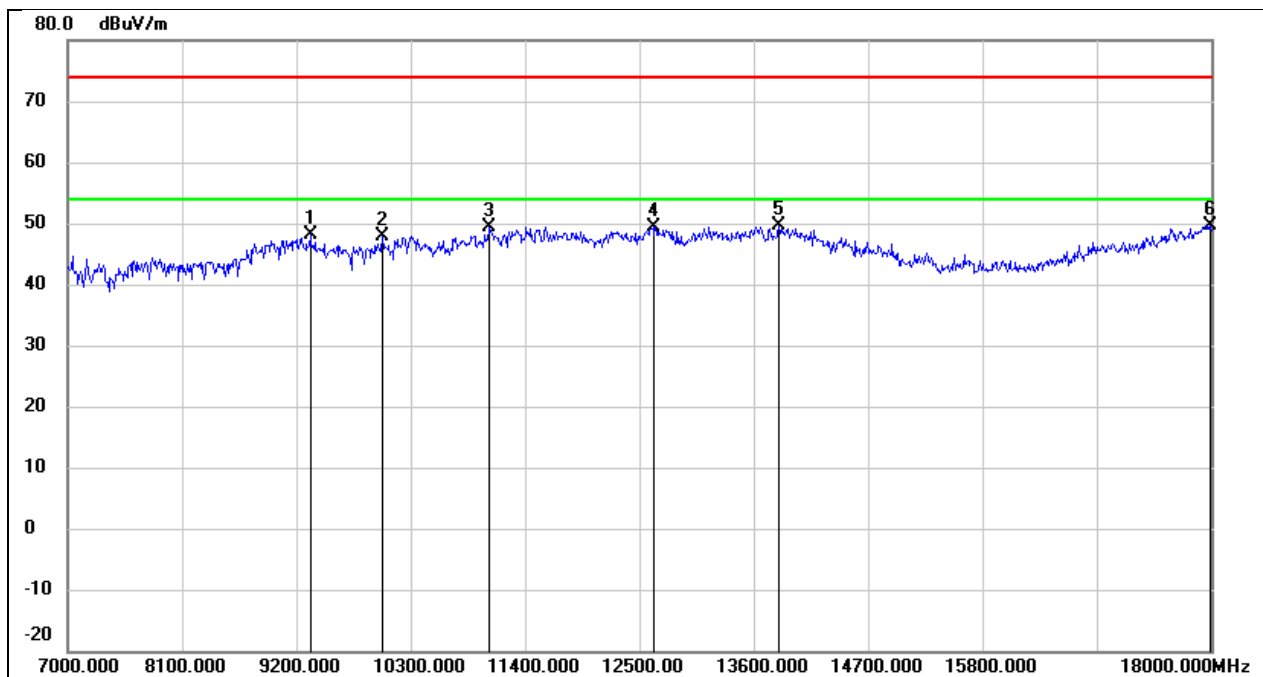


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.51	10.54	48.05	74.00	-25.95	peak
2	10025.000	36.14	11.82	47.96	74.00	-26.04	peak
3	11059.000	34.46	14.96	49.42	74.00	-24.58	peak
4	12632.000	31.37	17.99	49.36	74.00	-24.64	peak
5	13842.000	28.09	21.49	49.58	74.00	-24.42	peak
6	17989.000	23.56	26.04	49.60	74.00	-24.40	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

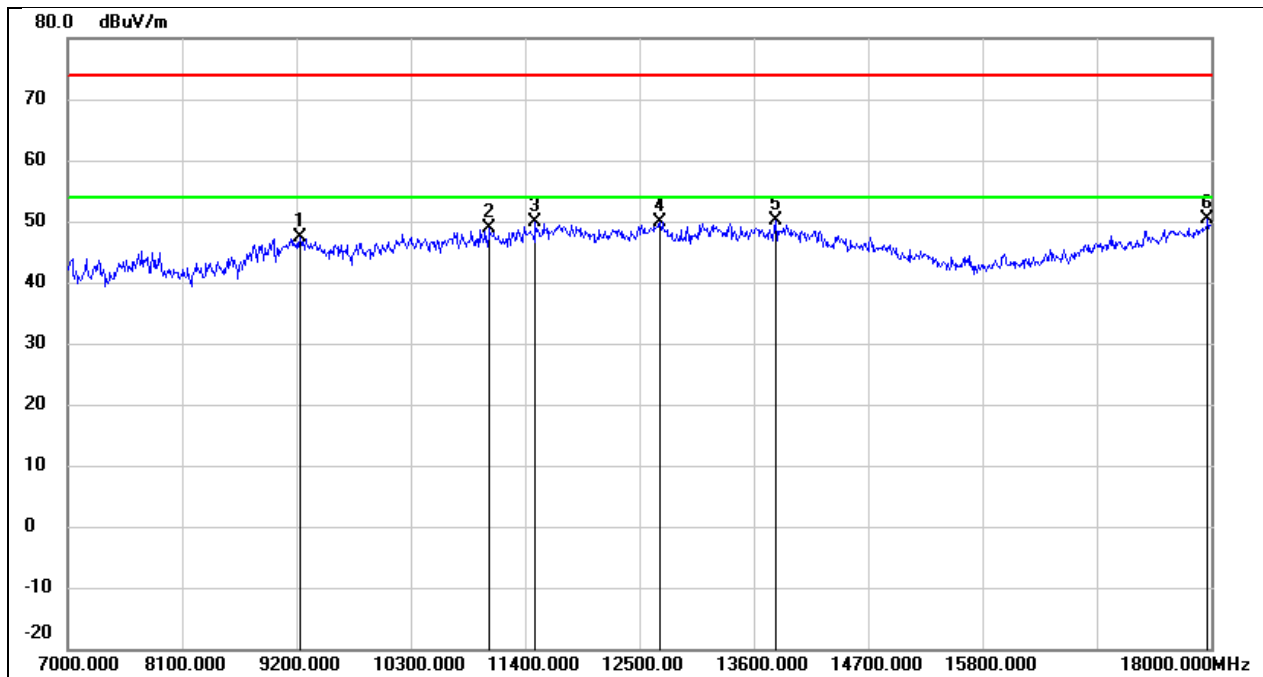


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.80	10.48	47.28	74.00	-26.72	peak
2	11059.000	33.96	14.96	48.92	74.00	-25.08	peak
3	11499.000	33.15	16.77	49.92	74.00	-24.08	peak
4	12698.000	31.79	18.08	49.87	74.00	-24.13	peak
5	13809.000	28.63	21.41	50.04	74.00	-23.96	peak
6	17967.000	24.37	25.89	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3 V

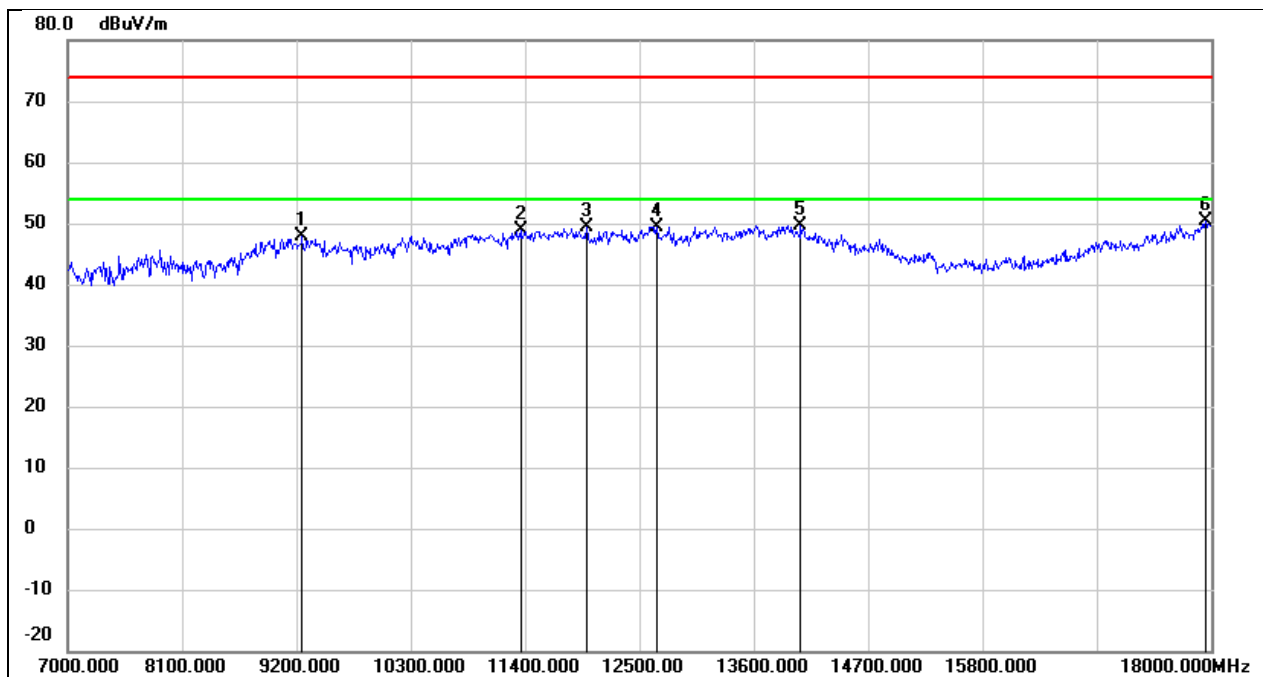


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.42	10.51	47.93	74.00	-26.07	peak
2	11356.000	32.66	16.19	48.85	74.00	-25.15	peak
3	11994.000	31.79	17.69	49.48	74.00	-24.52	peak
4	12665.000	31.39	18.04	49.43	74.00	-24.57	peak
5	14051.000	28.04	21.67	49.71	74.00	-24.29	peak
6	17945.000	24.61	25.75	50.36	74.00	-23.64	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

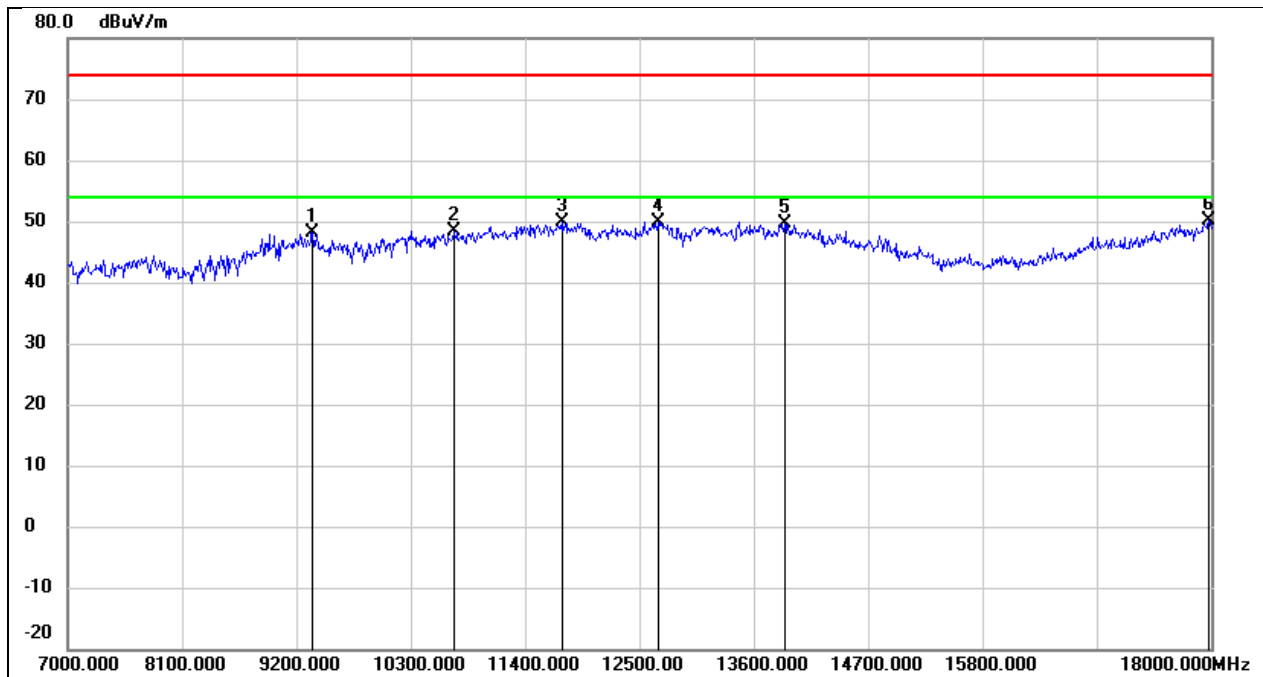


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	37.69	10.56	48.25	74.00	-25.75	peak
2	10718.000	34.80	13.66	48.46	74.00	-25.54	peak
3	11763.000	32.67	17.26	49.93	74.00	-24.07	peak
4	12676.000	31.82	18.05	49.87	74.00	-24.13	peak
5	13897.000	28.12	21.62	49.74	74.00	-24.26	peak
6	17978.000	24.11	25.97	50.08	74.00	-23.92	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3 V

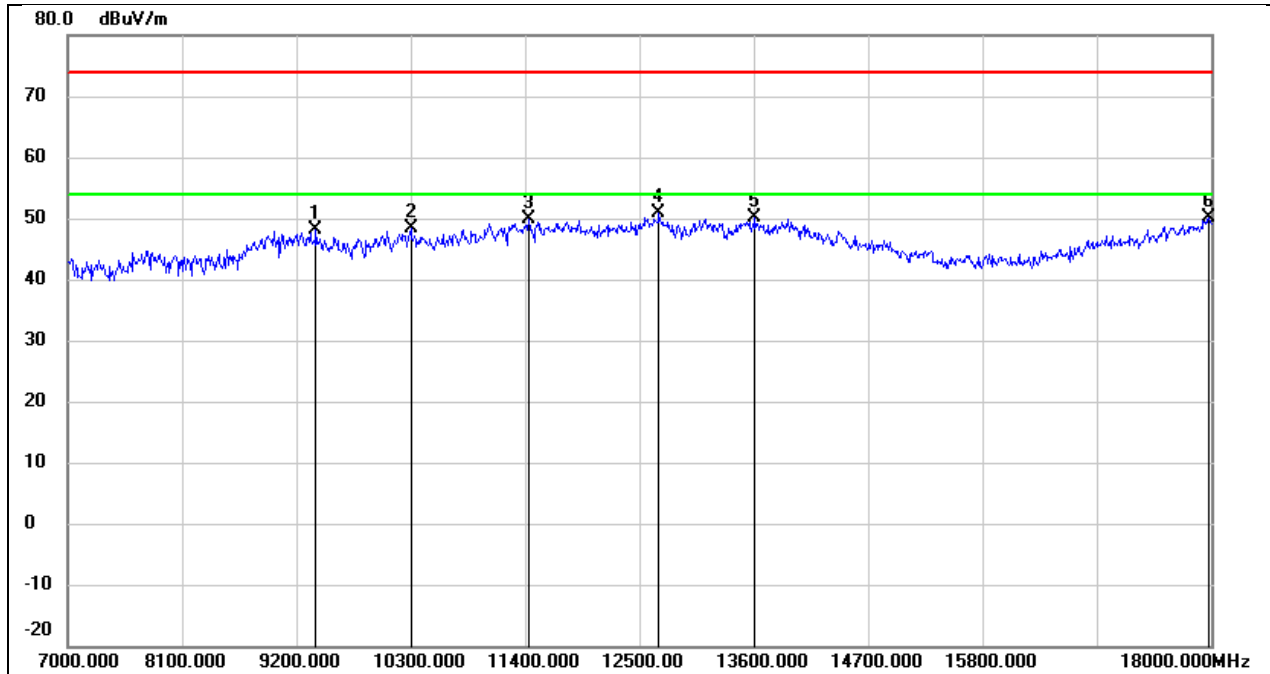


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	37.51	10.58	48.09	74.00	-25.91	peak
2	10300.000	36.07	12.40	48.47	74.00	-25.53	peak
3	11433.000	33.29	16.50	49.79	74.00	-24.21	peak
4	12687.000	32.80	18.05	50.85	74.00	-23.15	peak
5	13611.000	29.15	20.92	50.07	74.00	-23.93	peak
6	17978.000	24.25	25.97	50.22	74.00	-23.78	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

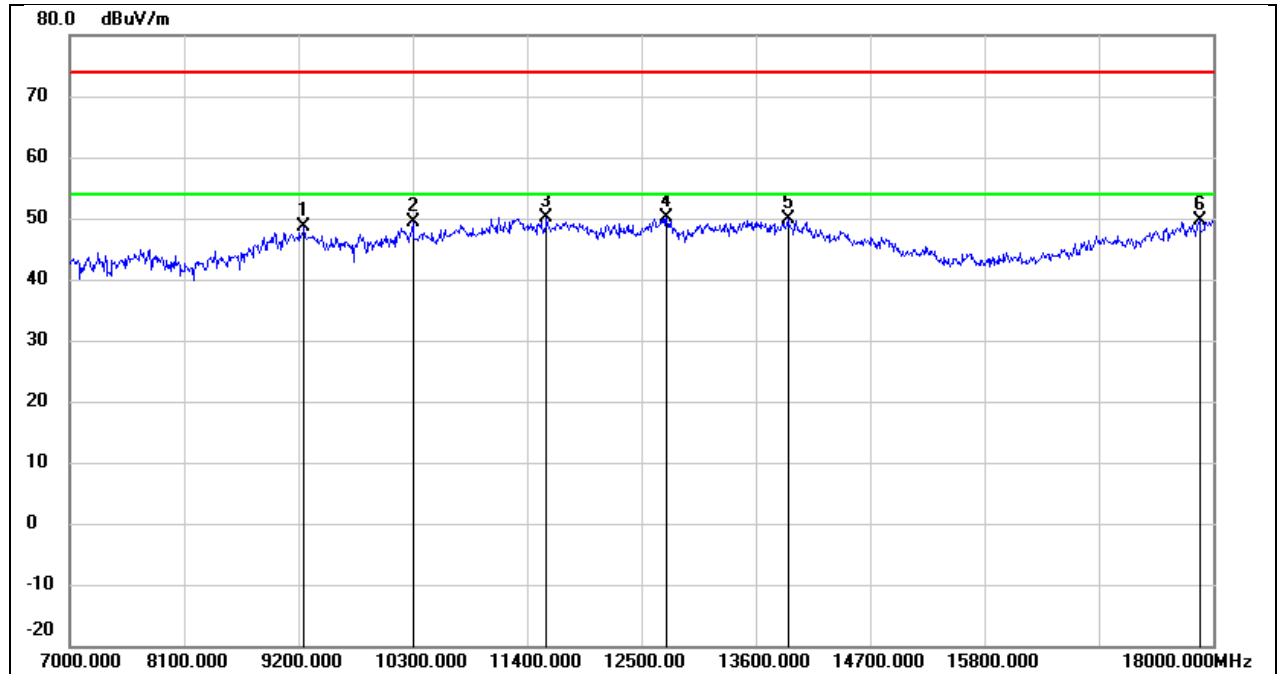


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.01	10.51	48.52	74.00	-25.48	peak
2	10300.000	36.92	12.40	49.32	74.00	-24.68	peak
3	11587.000	33.19	16.93	50.12	74.00	-23.88	peak
4	12742.000	32.04	18.13	50.17	74.00	-23.83	peak
5	13908.000	28.26	21.66	49.92	74.00	-24.08	peak
6	17868.000	24.30	25.22	49.52	74.00	-24.48	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3 V

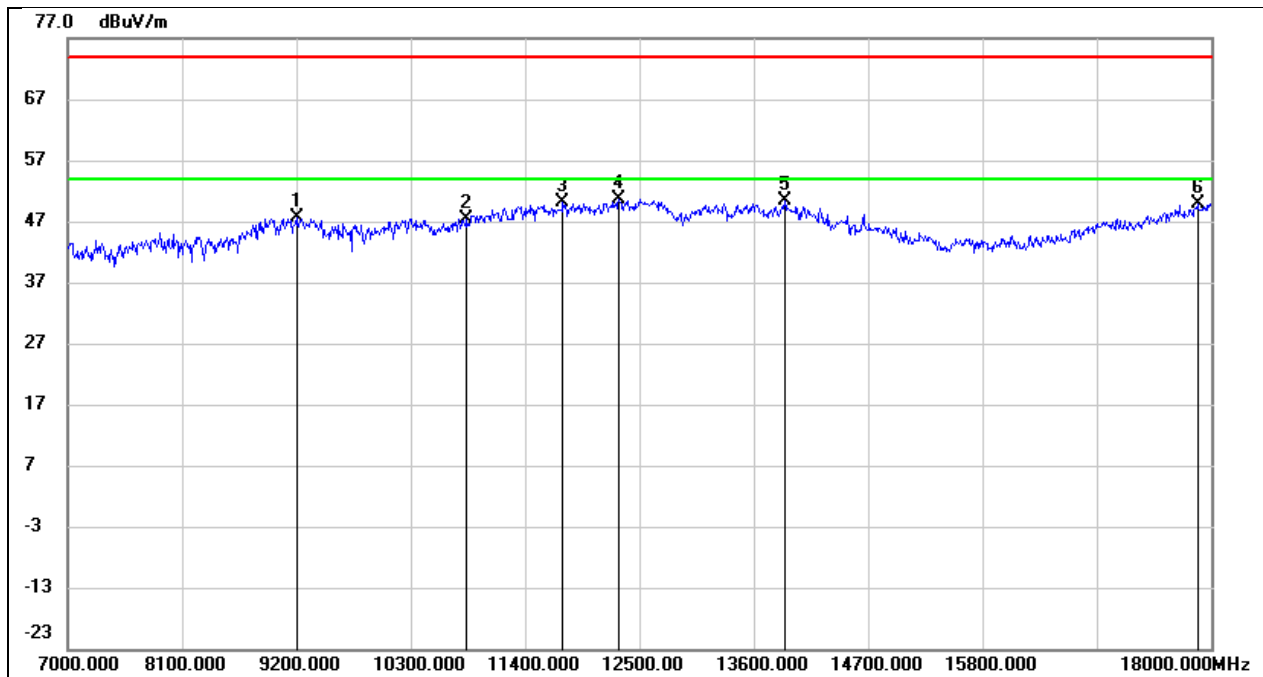


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.06	10.46	47.52	74.00	-26.48	peak
2	10839.000	33.40	14.10	47.50	74.00	-26.50	peak
3	11763.000	32.88	17.26	50.14	74.00	-23.86	peak
4	12302.000	32.76	17.78	50.54	74.00	-23.46	peak
5	13897.000	28.88	21.62	50.50	74.00	-23.50	peak
6	17868.000	24.55	25.22	49.77	74.00	-24.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

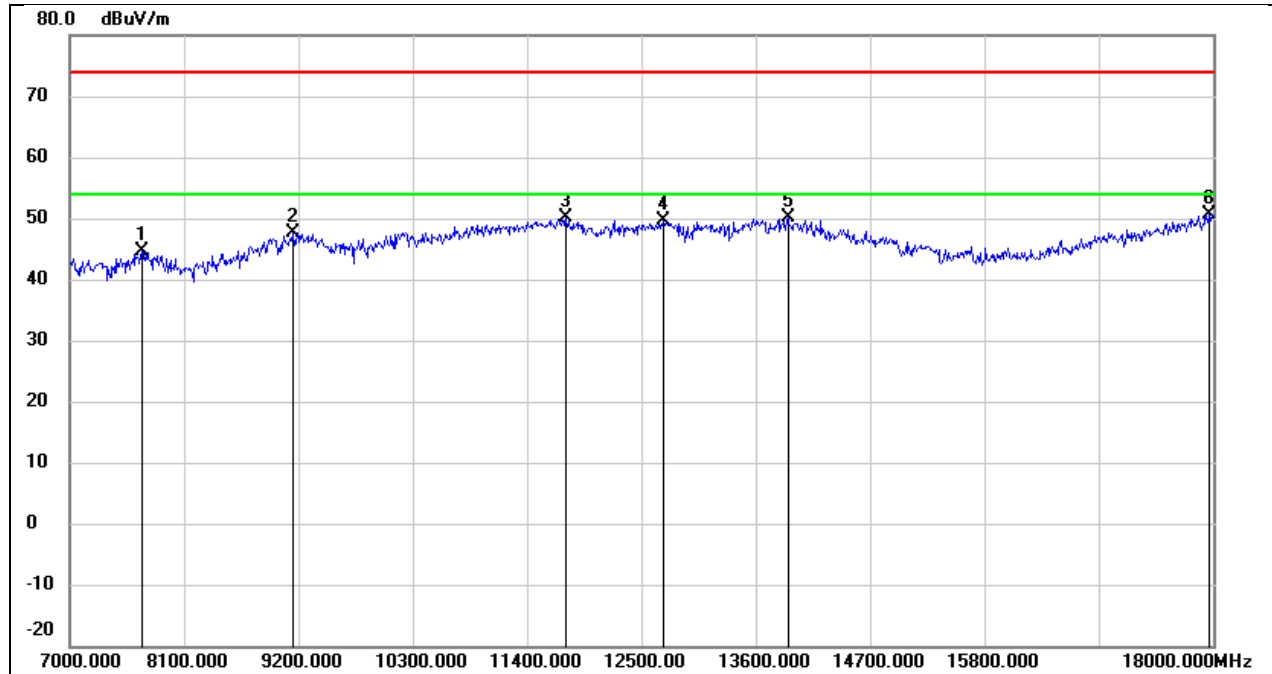


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7693.000	38.03	6.70	44.73	74.00	-29.27	peak
2	9145.000	37.32	10.43	47.75	74.00	-26.25	peak
3	11774.000	32.97	17.28	50.25	74.00	-23.75	peak
4	12709.000	31.59	18.09	49.68	74.00	-24.32	peak
5	13908.000	28.49	21.66	50.15	74.00	-23.85	peak
6	17956.000	24.86	25.82	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3 V

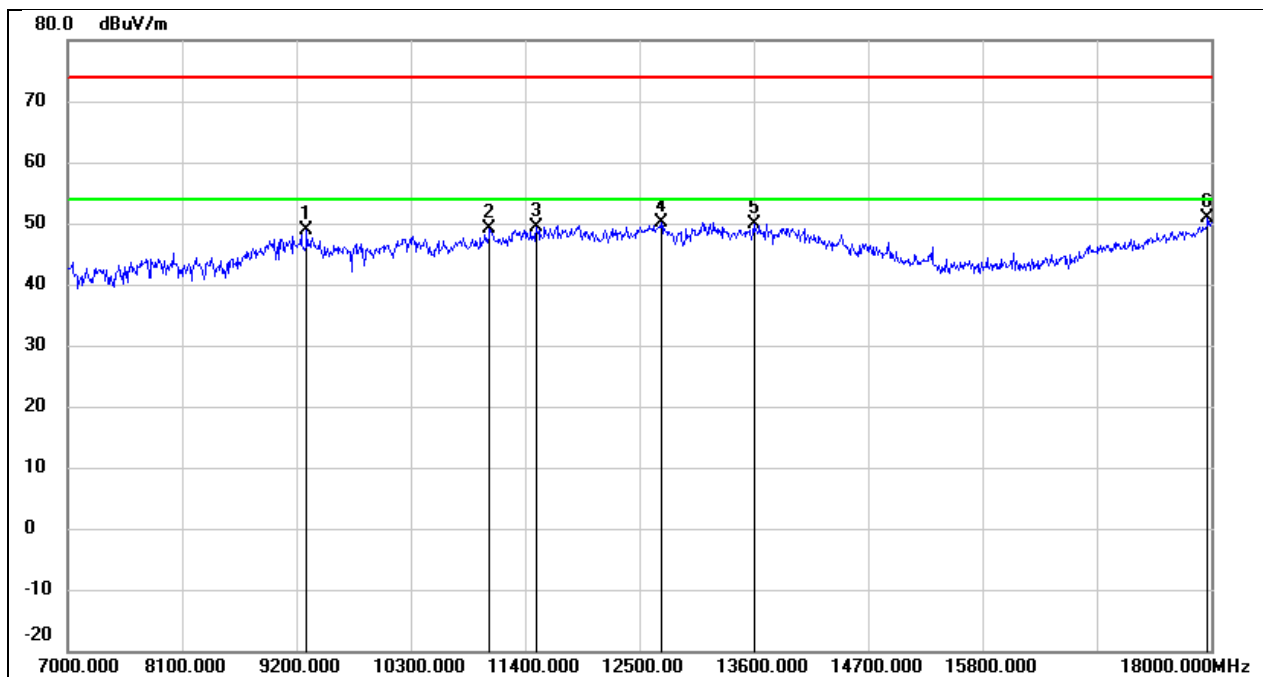


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	38.32	10.53	48.85	74.00	-25.15	peak
2	11059.000	34.13	14.96	49.09	74.00	-24.91	peak
3	11510.000	32.61	16.79	49.40	74.00	-24.60	peak
4	12709.000	32.09	18.09	50.18	74.00	-23.82	peak
5	13600.000	28.89	20.89	49.78	74.00	-24.22	peak
6	17967.000	24.91	25.89	50.80	74.00	-23.20	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

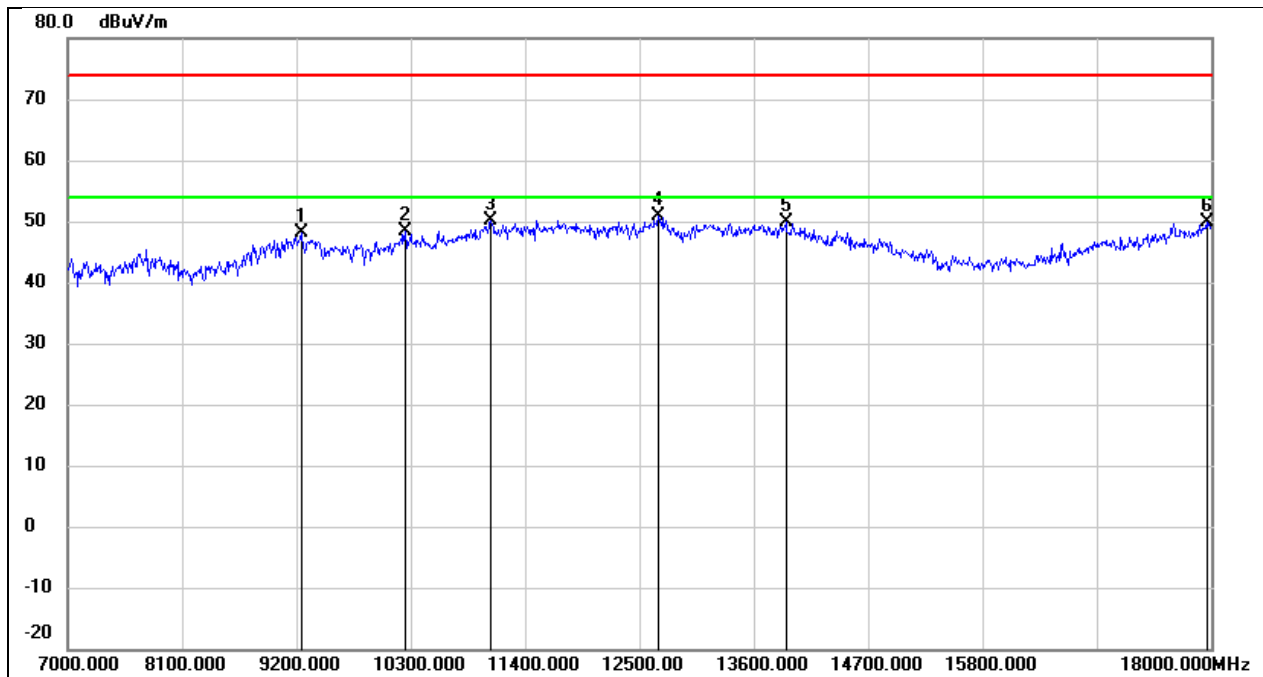


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.74	10.49	48.23	74.00	-25.77	peak
2	10245.000	36.21	12.28	48.49	74.00	-25.51	peak
3	11070.000	35.11	15.01	50.12	74.00	-23.88	peak
4	12676.000	32.95	18.05	51.00	74.00	-23.00	peak
5	13908.000	28.30	21.66	49.96	74.00	-24.04	peak
6	17956.000	23.98	25.82	49.80	74.00	-24.20	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3 V

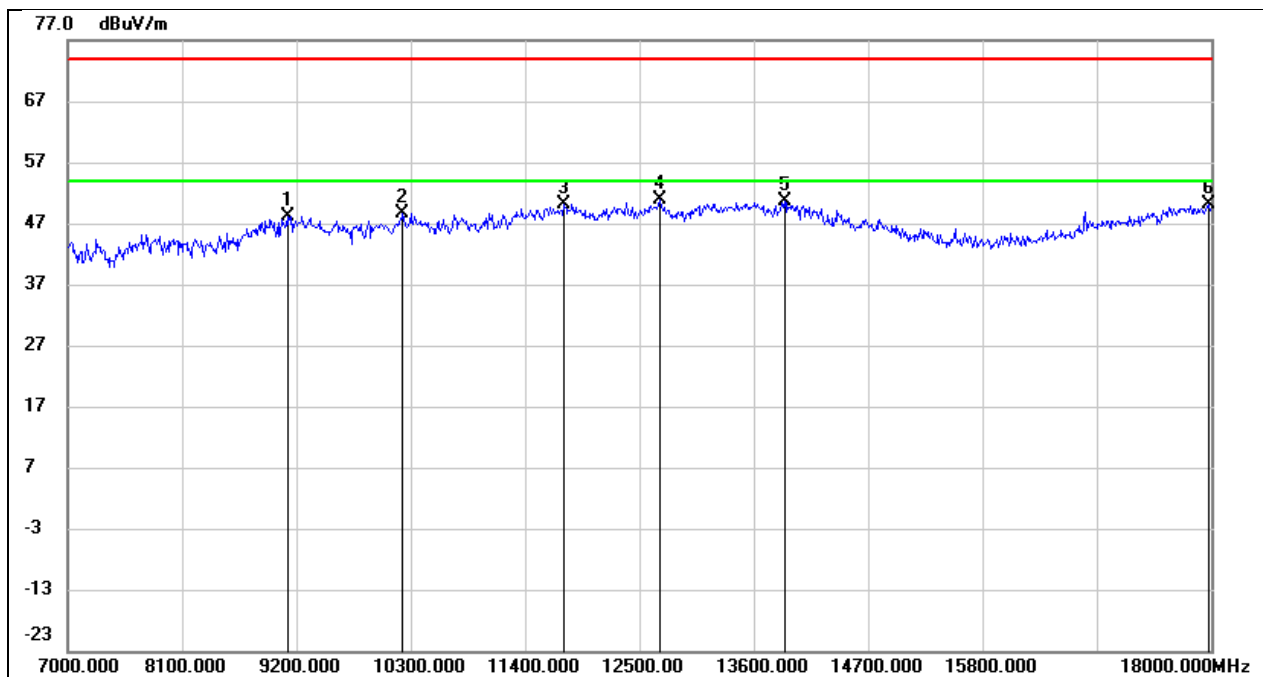


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.77	10.41	48.18	74.00	-25.82	peak
2	10223.000	36.38	12.24	48.62	74.00	-25.38	peak
3	11774.000	32.88	17.28	50.16	74.00	-23.84	peak
4	12698.000	32.86	18.08	50.94	74.00	-23.06	peak
5	13897.000	28.96	21.62	50.58	74.00	-23.42	peak
6	17978.000	24.12	25.97	50.09	74.00	-23.91	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

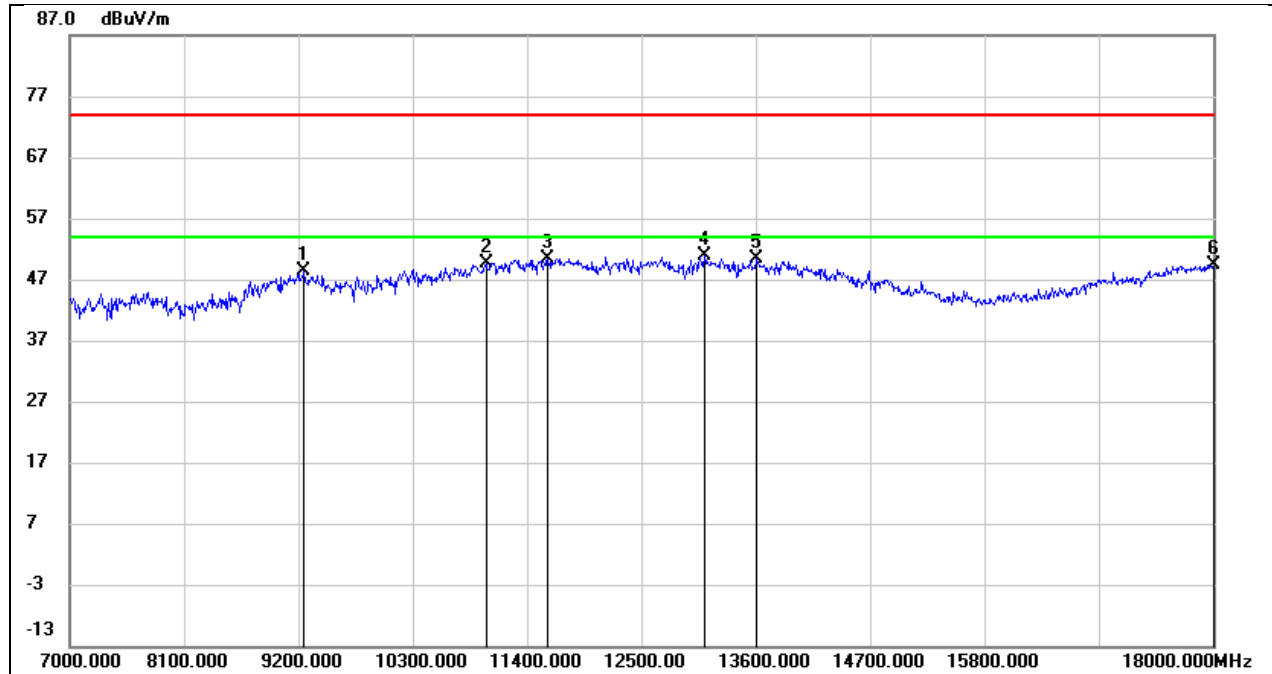


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.94	10.51	48.45	74.00	-25.55	peak
2	11004.000	34.99	14.74	49.73	74.00	-24.27	peak
3	11598.000	33.39	16.96	50.35	74.00	-23.65	peak
4	13105.000	31.85	18.91	50.76	74.00	-23.24	peak
5	13611.000	29.43	20.92	50.35	74.00	-23.65	peak
6	18000.000	23.26	26.12	49.38	74.00	-24.62	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3 V

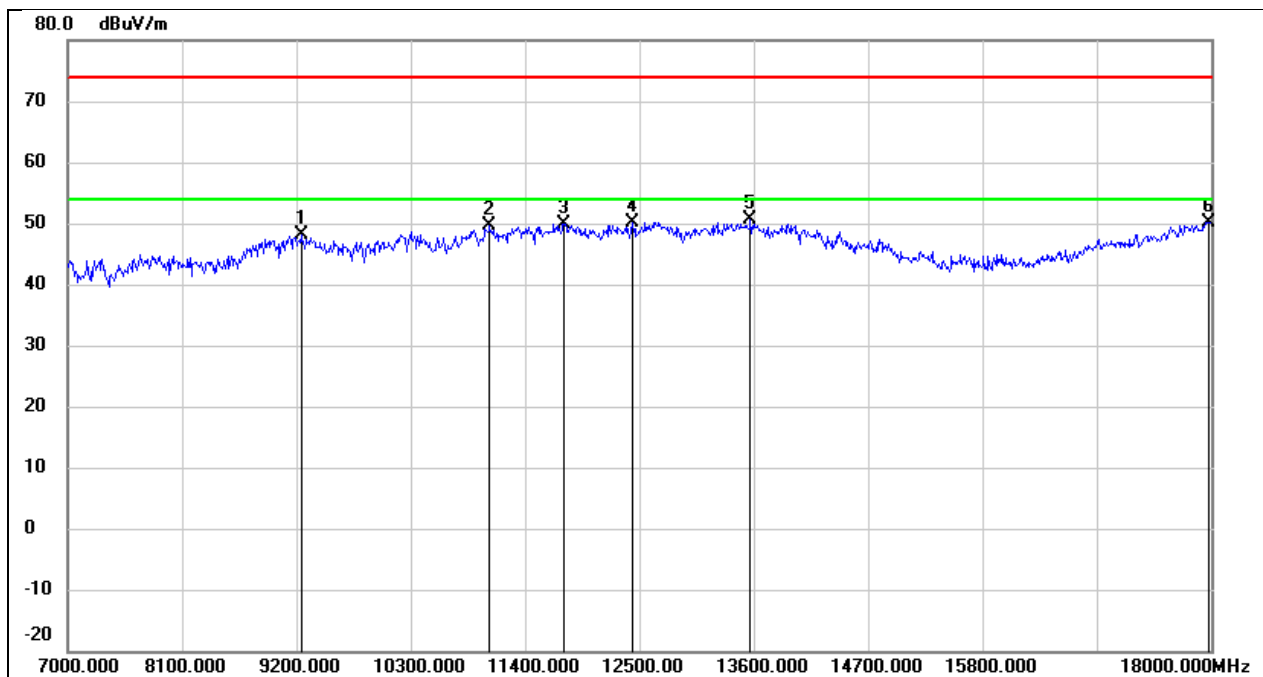


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.52	10.49	48.01	74.00	-25.99	peak
2	11059.000	34.55	14.96	49.51	74.00	-24.49	peak
3	11774.000	32.72	17.28	50.00	74.00	-24.00	peak
4	12434.000	32.29	17.81	50.10	74.00	-23.90	peak
5	13567.000	29.75	20.80	50.55	74.00	-23.45	peak
6	17978.000	24.22	25.97	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

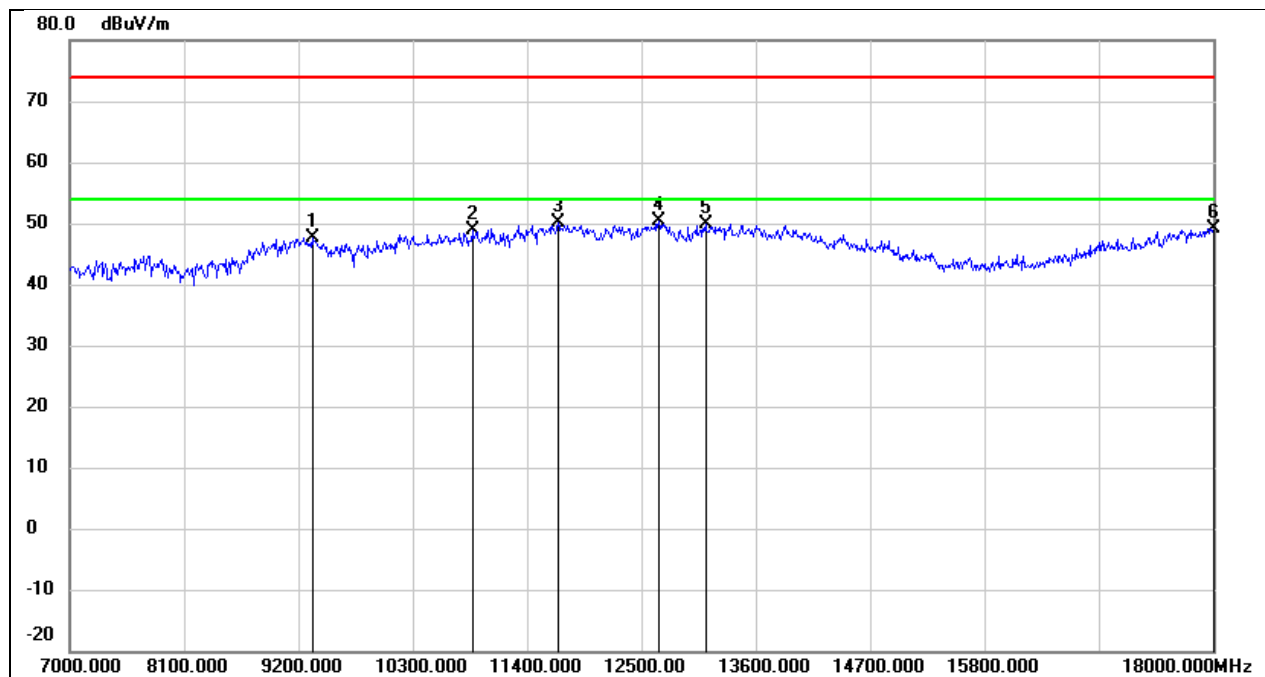


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.04	10.54	47.58	74.00	-26.42	peak
2	10872.000	34.65	14.23	48.88	74.00	-25.12	peak
3	11697.000	32.95	17.13	50.08	74.00	-23.92	peak
4	12665.000	32.27	18.04	50.31	74.00	-23.69	peak
5	13116.000	30.98	18.96	49.94	74.00	-24.06	peak
6	18000.000	23.05	26.12	49.17	74.00	-24.83	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3 V

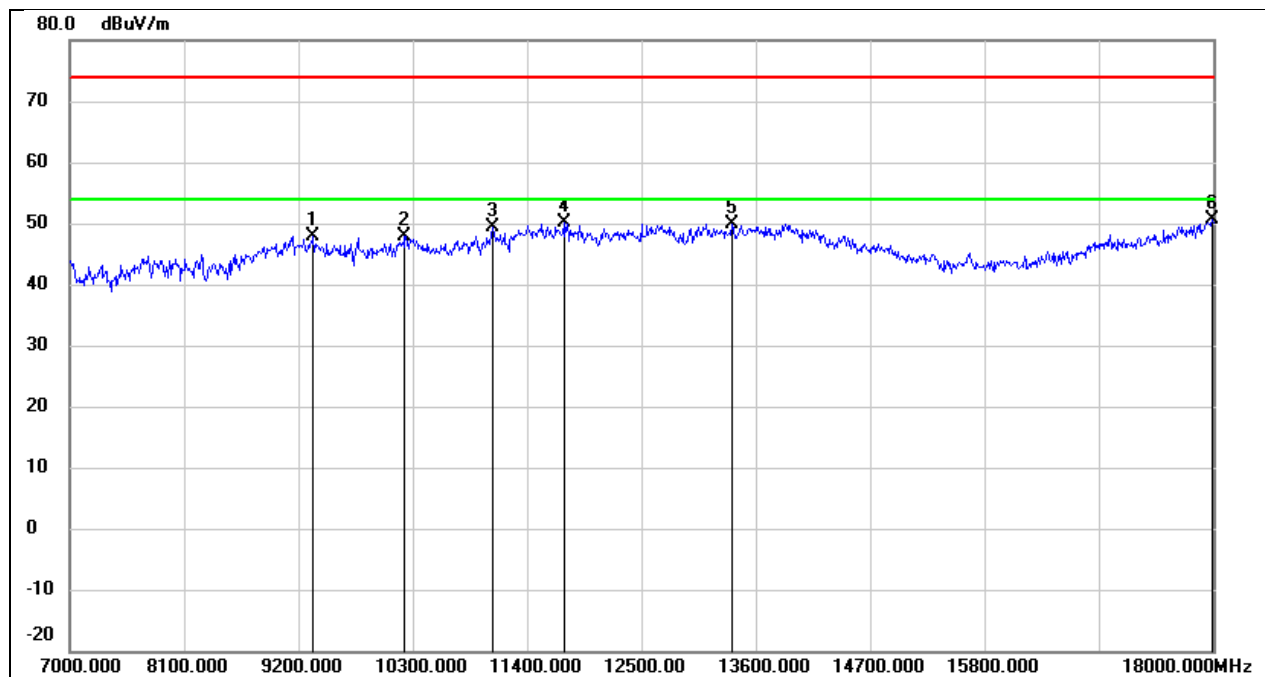


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.32	10.55	47.87	74.00	-26.13	peak
2	10223.000	35.66	12.24	47.90	74.00	-26.10	peak
3	11070.000	34.47	15.01	49.48	74.00	-24.52	peak
4	11752.000	32.81	17.24	50.05	74.00	-23.95	peak
5	13369.000	29.91	20.06	49.97	74.00	-24.03	peak
6	17989.000	24.69	26.04	50.73	74.00	-23.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

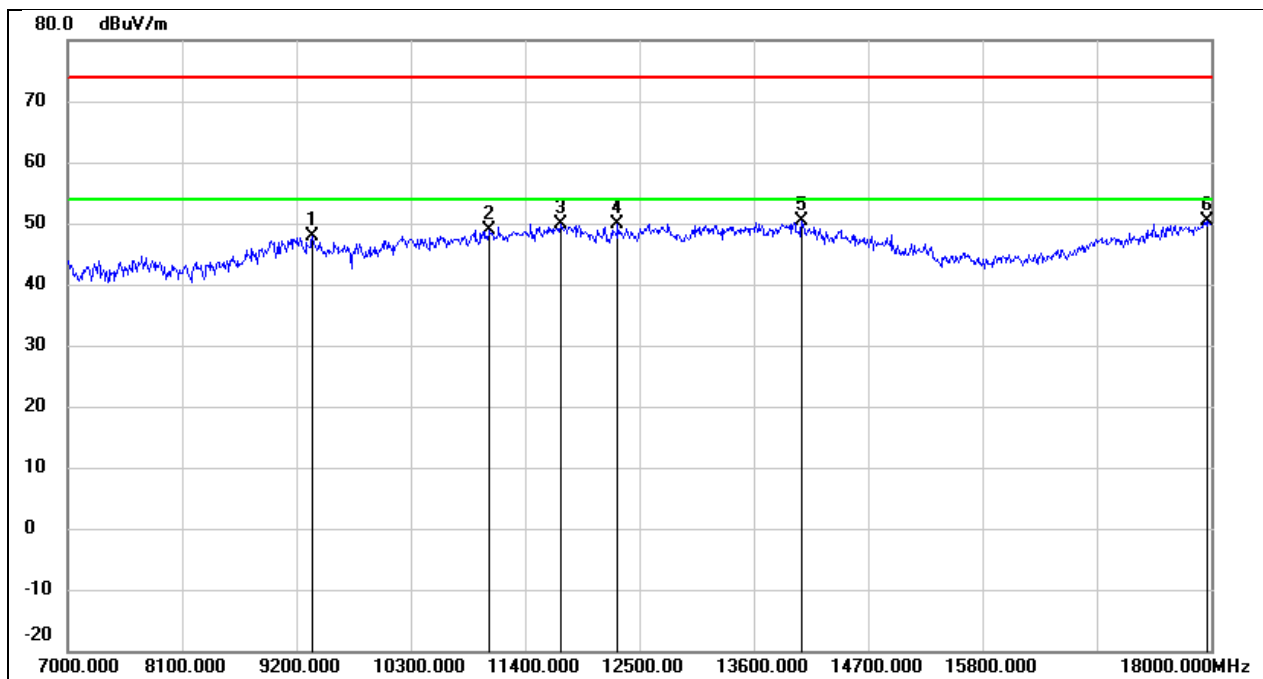


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	37.20	10.56	47.76	74.00	-26.24	peak
2	11059.000	33.88	14.96	48.84	74.00	-25.16	peak
3	11741.000	32.55	17.22	49.77	74.00	-24.23	peak
4	12291.000	32.09	17.78	49.87	74.00	-24.13	peak
5	14062.000	28.67	21.62	50.29	74.00	-23.71	peak
6	17967.000	24.56	25.89	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3 V

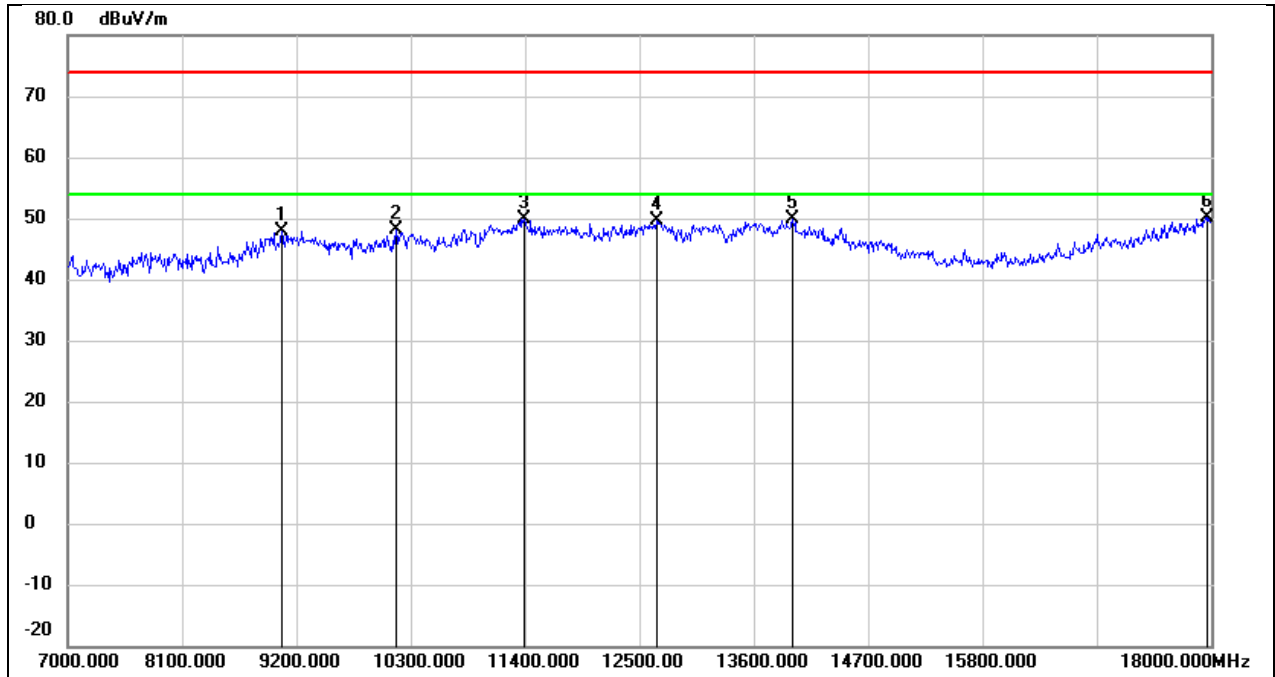


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.59	10.38	47.97	74.00	-26.03	peak
2	10157.000	35.99	12.10	48.09	74.00	-25.91	peak
3	11389.000	33.66	16.31	49.97	74.00	-24.03	peak
4	12665.000	31.64	18.04	49.68	74.00	-24.32	peak
5	13974.000	28.07	21.82	49.89	74.00	-24.11	peak
6	17956.000	24.34	25.82	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

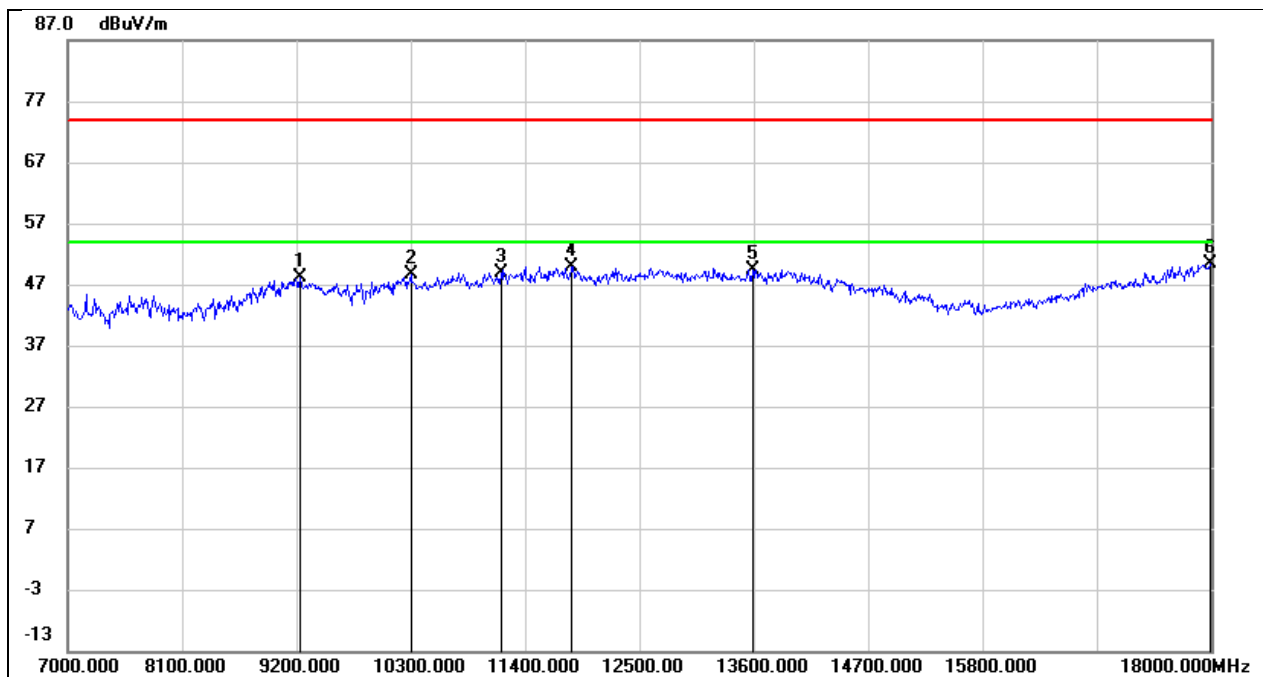


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.62	10.48	48.10	74.00	-25.90	peak
2	10300.000	36.27	12.40	48.67	74.00	-25.33	peak
3	11169.000	33.49	15.42	48.91	74.00	-25.09	peak
4	11851.000	32.42	17.43	49.85	74.00	-24.15	peak
5	13589.000	28.60	20.86	49.46	74.00	-24.54	peak
6	17989.000	24.40	26.04	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3 V

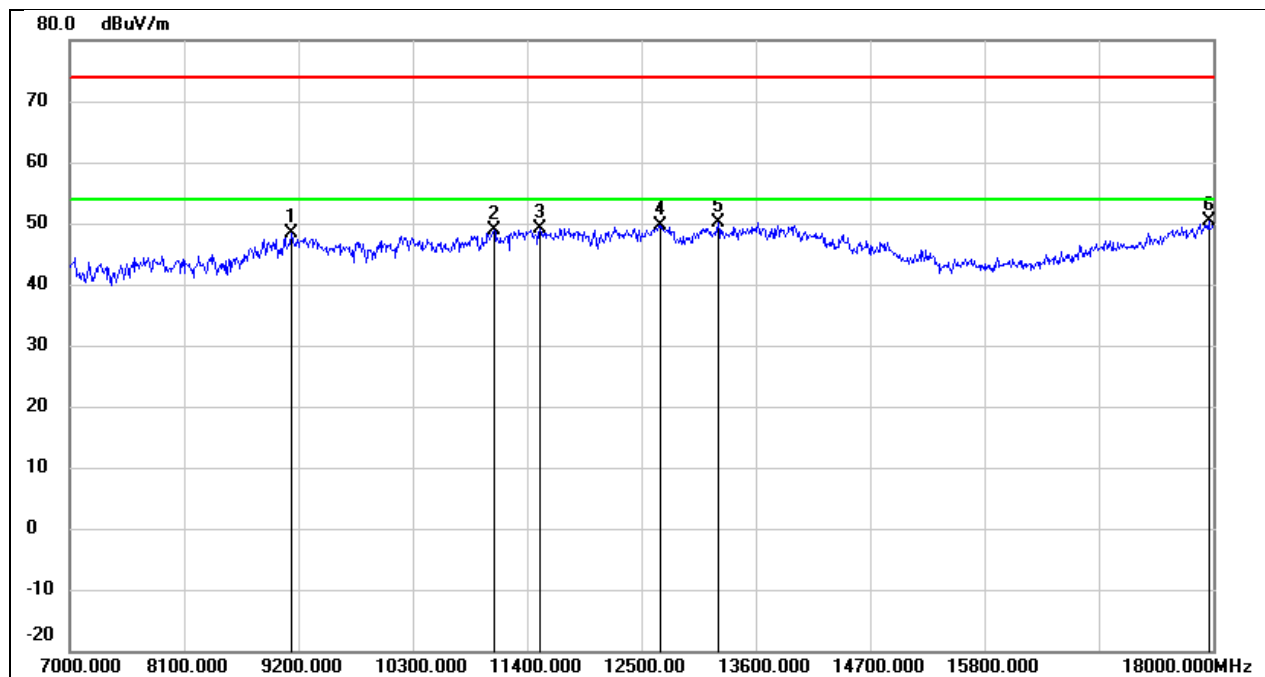


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.86	10.41	48.27	74.00	-25.73	peak
2	11081.000	33.91	15.05	48.96	74.00	-25.04	peak
3	11521.000	32.43	16.82	49.25	74.00	-24.75	peak
4	12687.000	31.59	18.05	49.64	74.00	-24.36	peak
5	13237.000	30.76	19.49	50.25	74.00	-23.75	peak
6	17956.000	24.45	25.82	50.27	74.00	-23.73	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

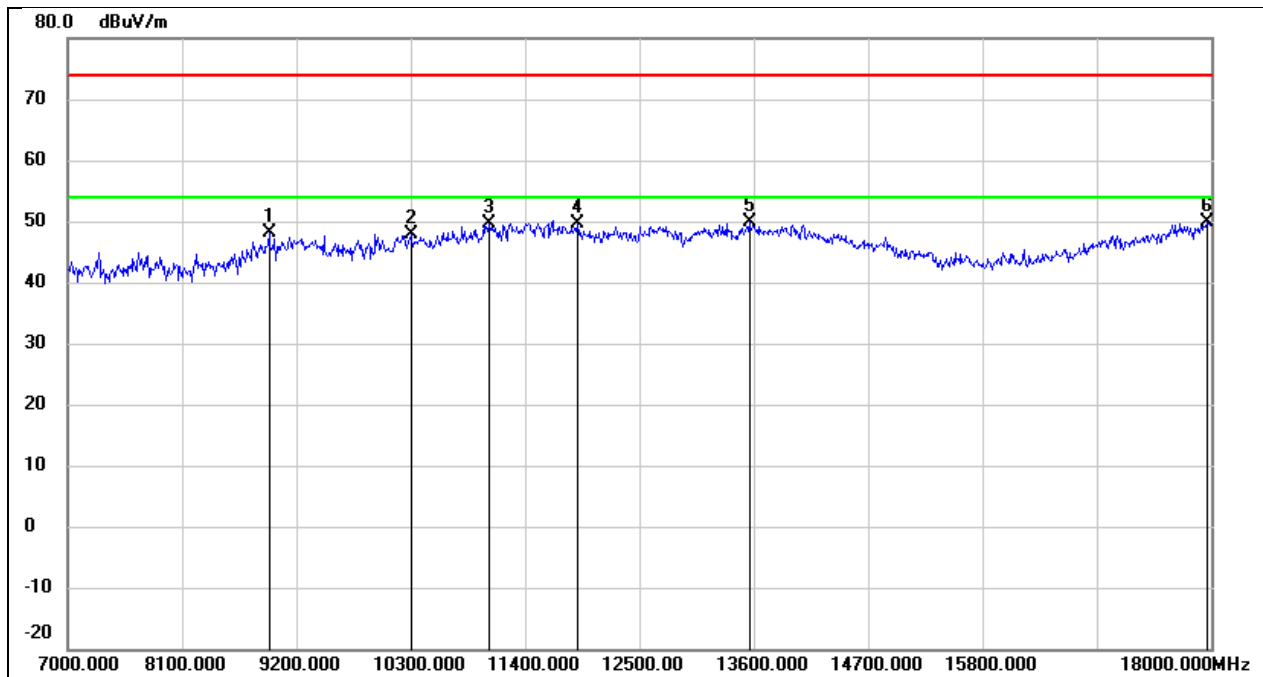


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	38.22	9.90	48.12	74.00	-25.88	peak
2	10300.000	35.44	12.40	47.84	74.00	-26.16	peak
3	11048.000	34.69	14.91	49.60	74.00	-24.40	peak
4	11906.000	32.08	17.52	49.60	74.00	-24.40	peak
5	13556.000	29.10	20.78	49.88	74.00	-24.12	peak
6	17956.000	24.16	25.82	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3 V

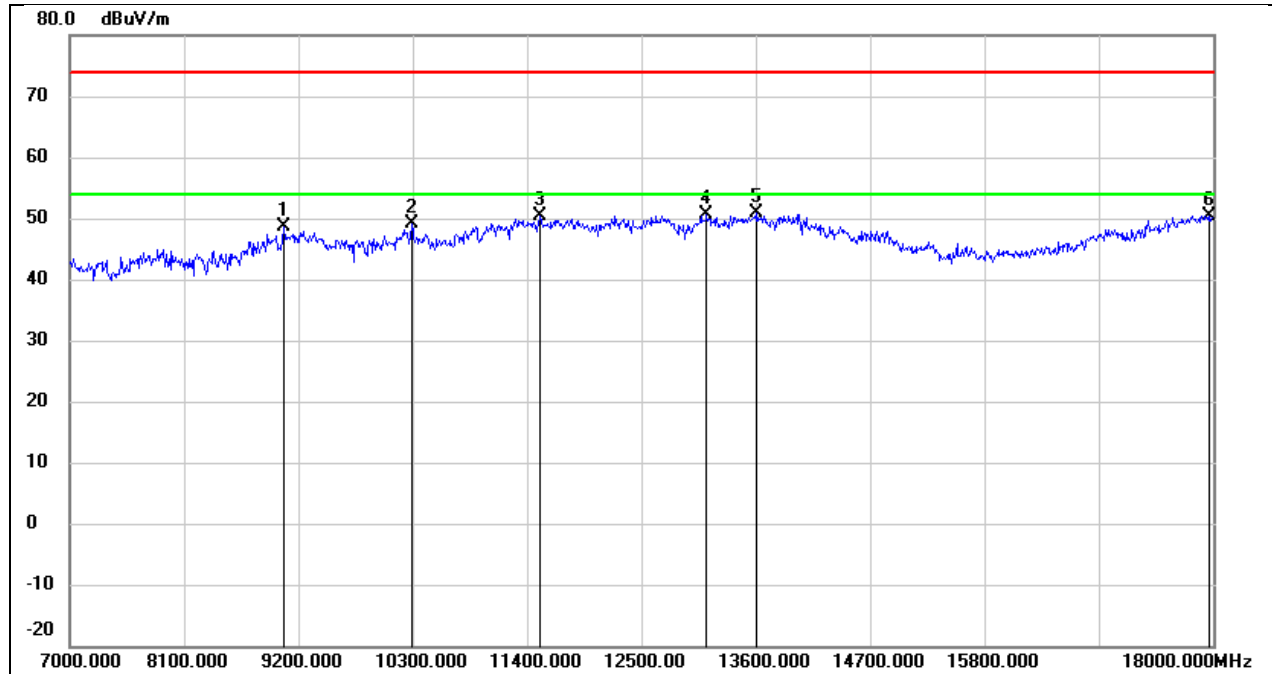


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.14	10.38	48.52	74.00	-25.48	peak
2	10289.000	36.85	12.38	49.23	74.00	-24.77	peak
3	11521.000	33.51	16.82	50.33	74.00	-23.67	peak
4	13127.000	31.61	19.01	50.62	74.00	-23.38	peak
5	13611.000	29.91	20.92	50.83	74.00	-23.17	peak
6	17967.000	24.60	25.89	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

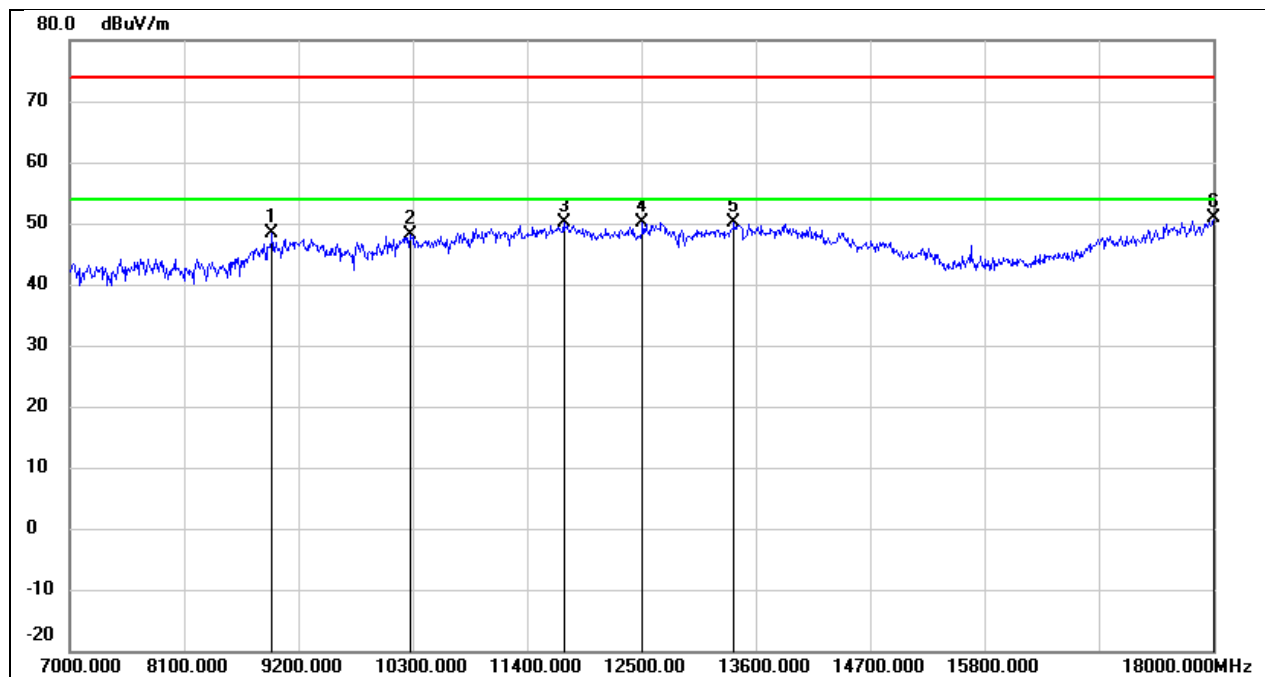


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8947.000	38.42	9.98	48.40	74.00	-25.60	peak
2	10278.000	35.68	12.35	48.03	74.00	-25.97	peak
3	11752.000	32.84	17.24	50.08	74.00	-23.92	peak
4	12511.000	32.23	17.84	50.07	74.00	-23.93	peak
5	13391.000	30.08	20.16	50.24	74.00	-23.76	peak
6	18000.000	24.87	26.12	50.99	74.00	-23.01	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

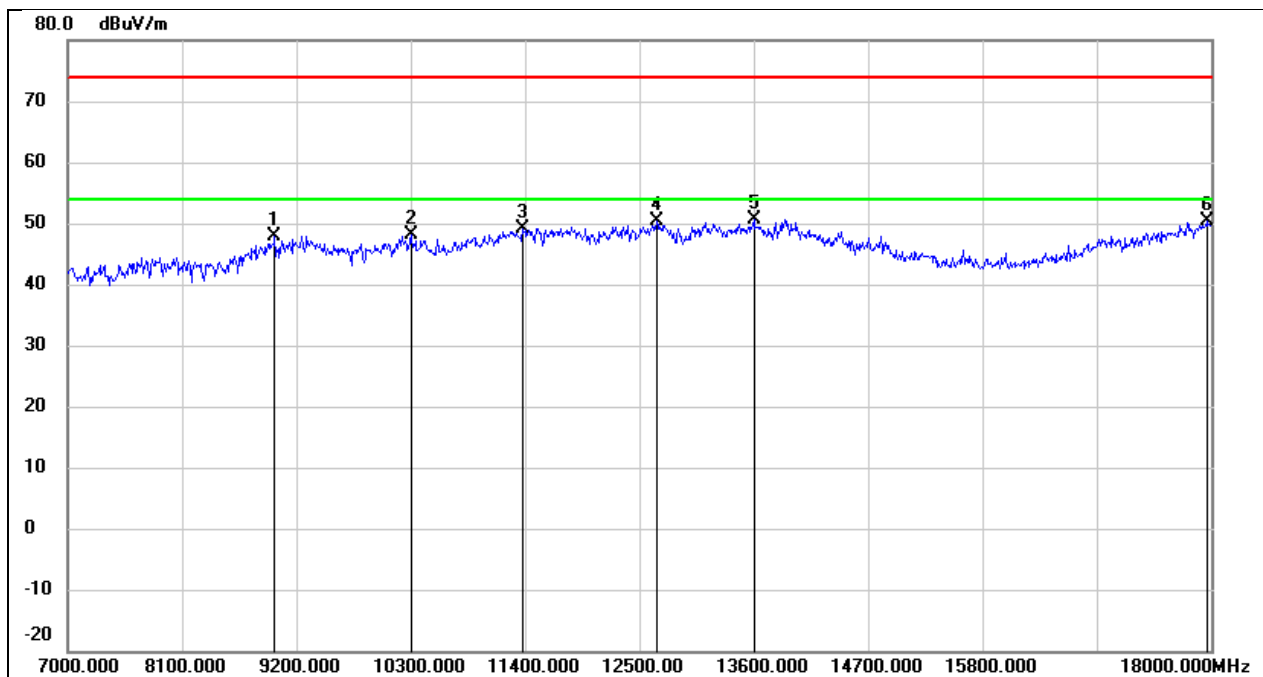


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.68	10.28	47.96	74.00	-26.04	peak
2	10300.000	35.63	12.40	48.03	74.00	-25.97	peak
3	11378.000	32.84	16.26	49.10	74.00	-24.90	peak
4	12665.000	32.28	18.04	50.32	74.00	-23.68	peak
5	13600.000	29.67	20.89	50.56	74.00	-23.44	peak
6	17956.000	24.63	25.82	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

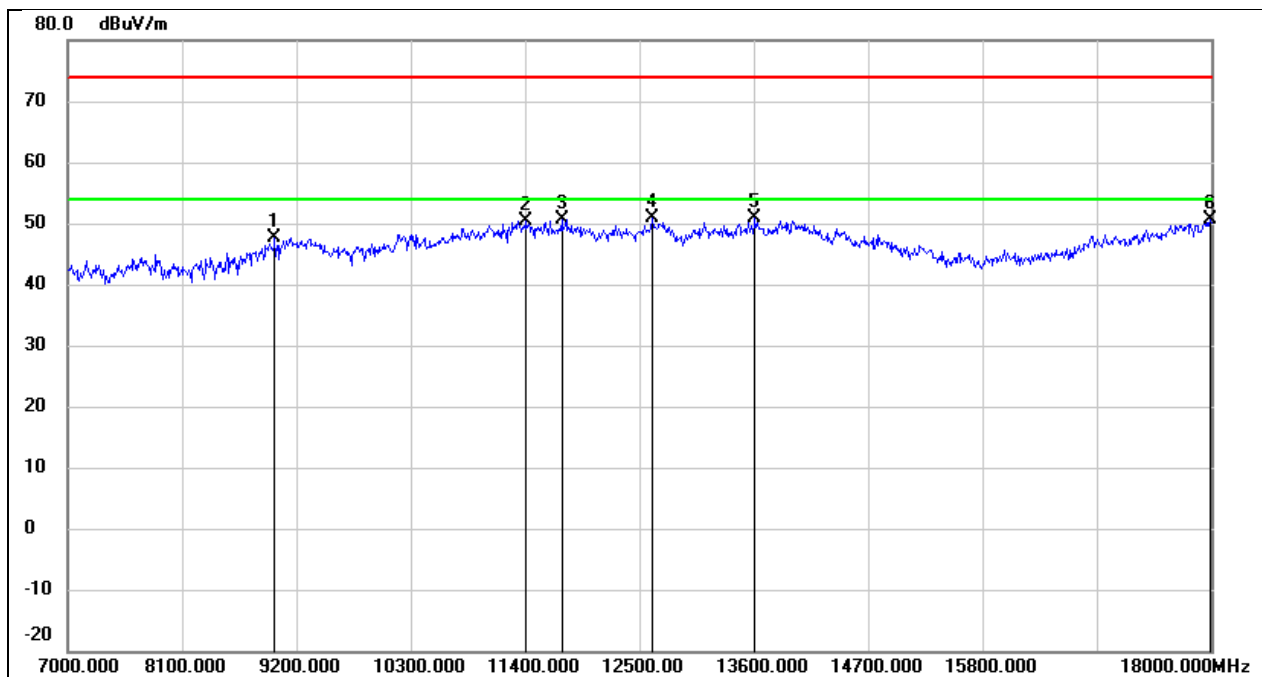


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.46	10.28	47.74	74.00	-26.26	peak
2	11411.000	33.95	16.41	50.36	74.00	-23.64	peak
3	11752.000	33.36	17.24	50.60	74.00	-23.40	peak
4	12621.000	32.82	17.98	50.80	74.00	-23.20	peak
5	13611.000	30.01	20.92	50.93	74.00	-23.07	peak
6	17989.000	24.48	26.04	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3 V

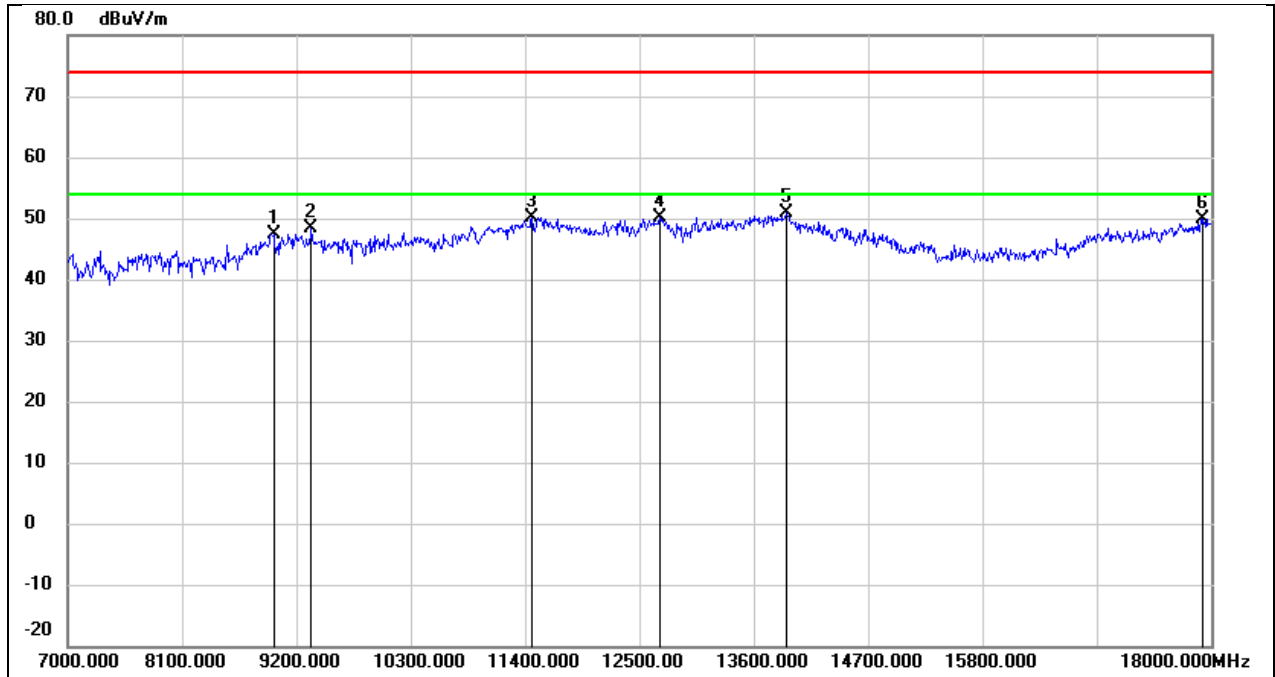


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.17	10.21	47.38	74.00	-26.62	peak
2	9343.000	37.79	10.55	48.34	74.00	-25.66	peak
3	11466.000	33.58	16.63	50.21	74.00	-23.79	peak
4	12698.000	32.04	18.08	50.12	74.00	-23.88	peak
5	13919.000	29.23	21.68	50.91	74.00	-23.09	peak
6	17912.000	24.47	25.52	49.99	74.00	-24.01	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

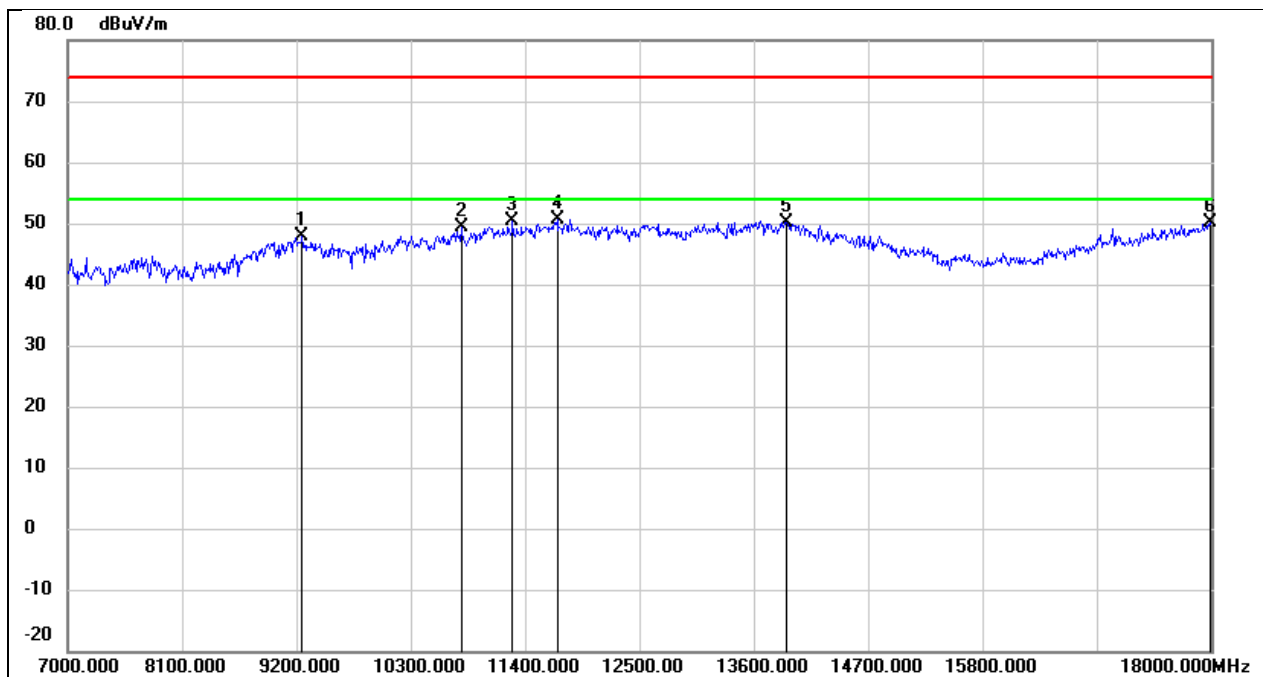


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.32	10.51	47.83	74.00	-26.17	peak
2	10784.000	35.56	13.91	49.47	74.00	-24.53	peak
3	11279.000	34.57	15.86	50.43	74.00	-23.57	peak
4	11708.000	33.56	17.16	50.72	74.00	-23.28	peak
5	13919.000	28.57	21.68	50.25	74.00	-23.75	peak
6	17989.000	24.01	26.04	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3 V

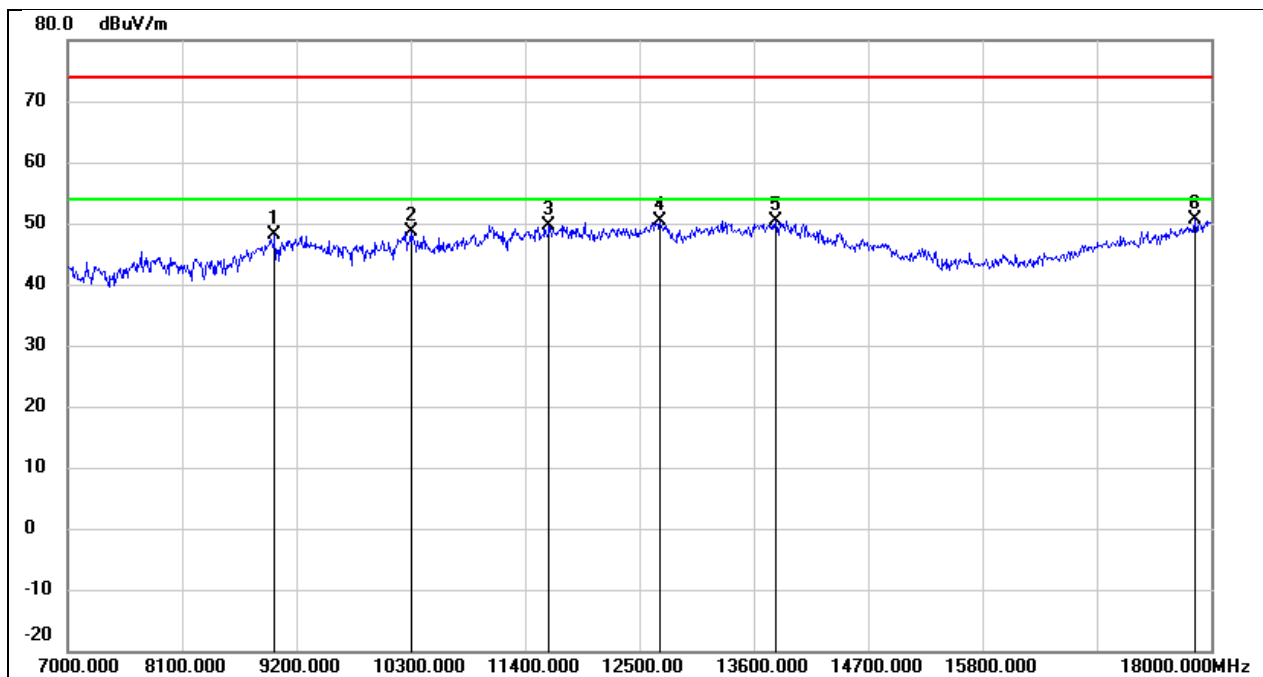


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8991.000	37.90	10.28	48.18	74.00	-25.82	peak
2	10300.000	36.31	12.40	48.71	74.00	-25.29	peak
3	11631.000	32.70	17.01	49.71	74.00	-24.29	peak
4	12698.000	32.39	18.08	50.47	74.00	-23.53	peak
5	13809.000	28.98	21.41	50.39	74.00	-23.61	peak
6	17846.000	25.52	25.08	50.60	74.00	-23.40	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

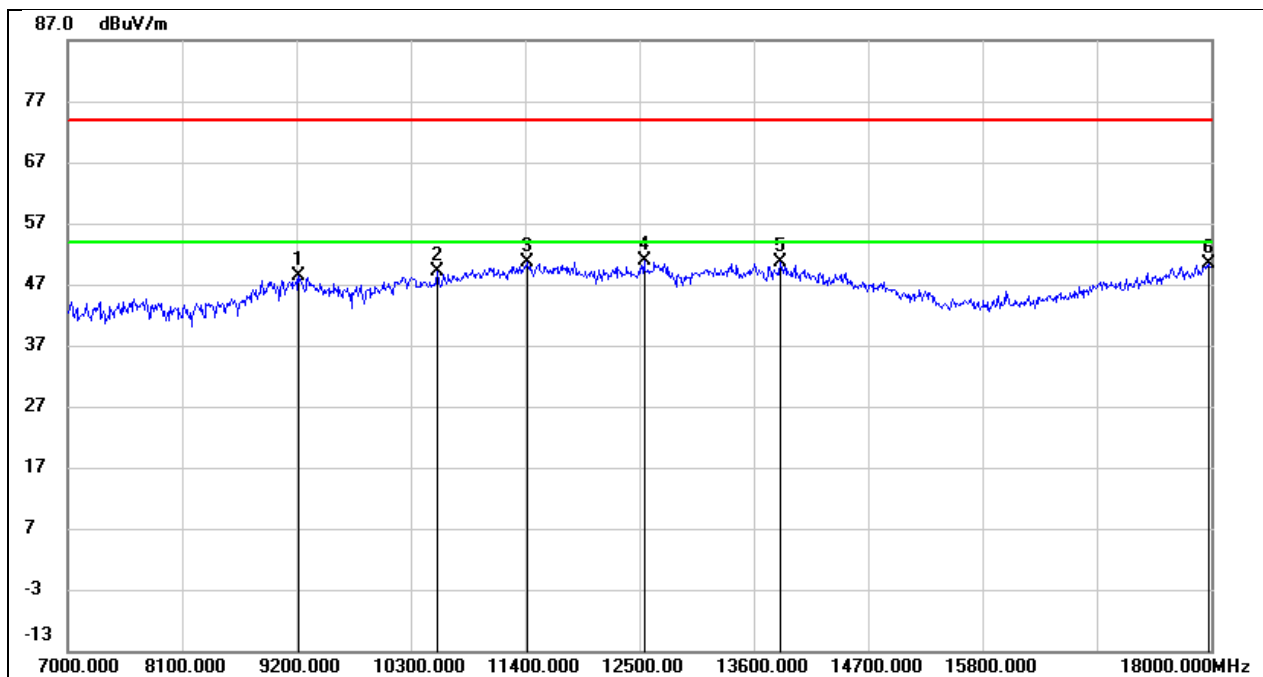


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	37.96	10.48	48.44	74.00	-25.56	peak
2	10553.000	36.09	13.02	49.11	74.00	-24.89	peak
3	11422.000	34.29	16.46	50.75	74.00	-23.25	peak
4	12544.000	32.97	17.88	50.85	74.00	-23.15	peak
5	13853.000	29.14	21.52	50.66	74.00	-23.34	peak
6	17978.000	24.38	25.97	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3 V

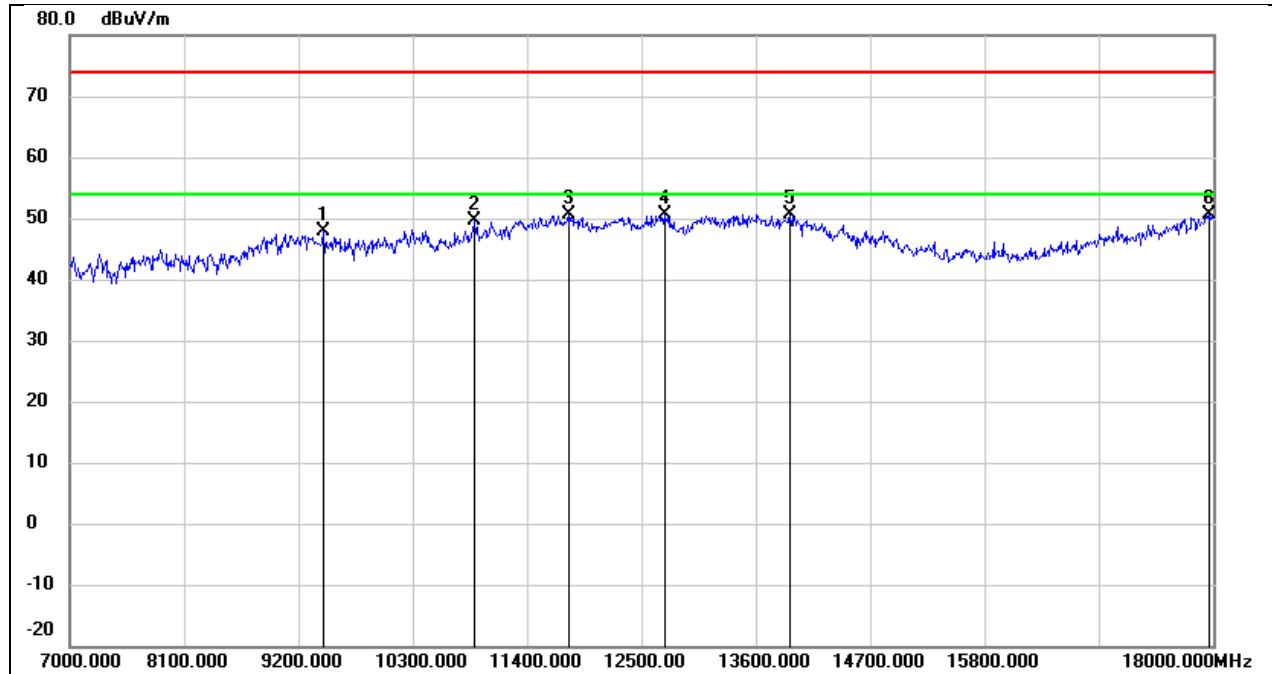


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9442.000	37.28	10.61	47.89	74.00	-26.11	peak
2	10894.000	35.38	14.32	49.70	74.00	-24.30	peak
3	11796.000	33.43	17.32	50.75	74.00	-23.25	peak
4	12720.000	32.51	18.09	50.60	74.00	-23.40	peak
5	13930.000	28.91	21.71	50.62	74.00	-23.38	peak
6	17956.000	24.69	25.82	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

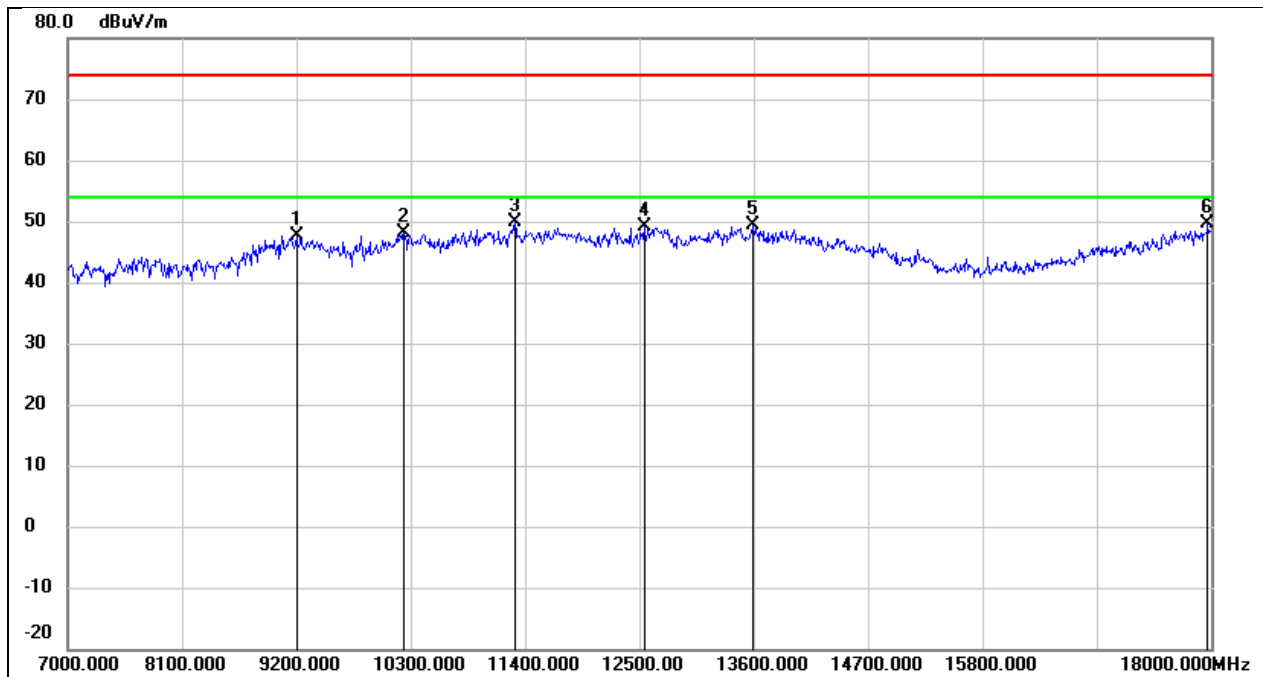


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.16	10.46	47.62	74.00	-26.38	peak
2	10234.000	35.79	12.26	48.05	74.00	-25.95	peak
3	11301.000	33.98	15.95	49.93	74.00	-24.07	peak
4	12544.000	31.28	17.88	49.16	74.00	-24.84	peak
5	13589.000	28.43	20.86	49.29	74.00	-24.71	peak
6	17967.000	23.68	25.89	49.57	74.00	-24.43	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3 V

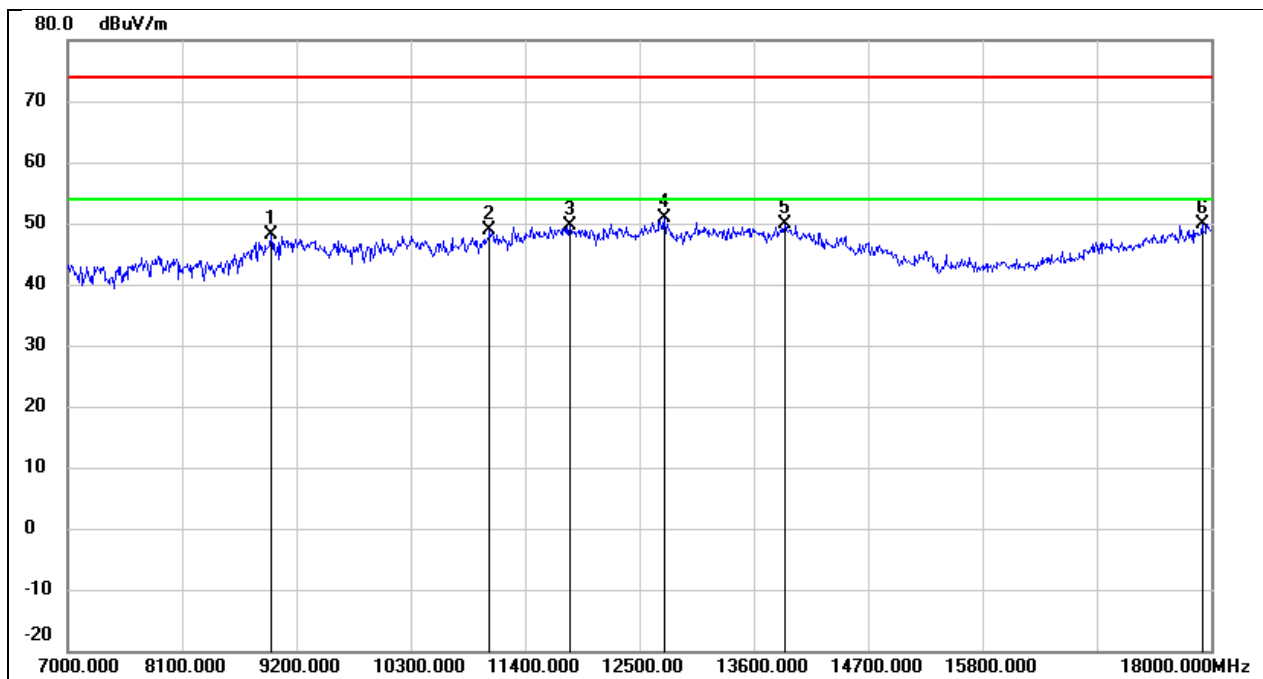


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8958.000	37.99	10.05	48.04	74.00	-25.96	peak
2	11059.000	33.80	14.96	48.76	74.00	-25.24	peak
3	11829.000	32.28	17.38	49.66	74.00	-24.34	peak
4	12742.000	32.64	18.13	50.77	74.00	-23.23	peak
5	13897.000	28.19	21.62	49.81	74.00	-24.19	peak
6	17912.000	24.43	25.52	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

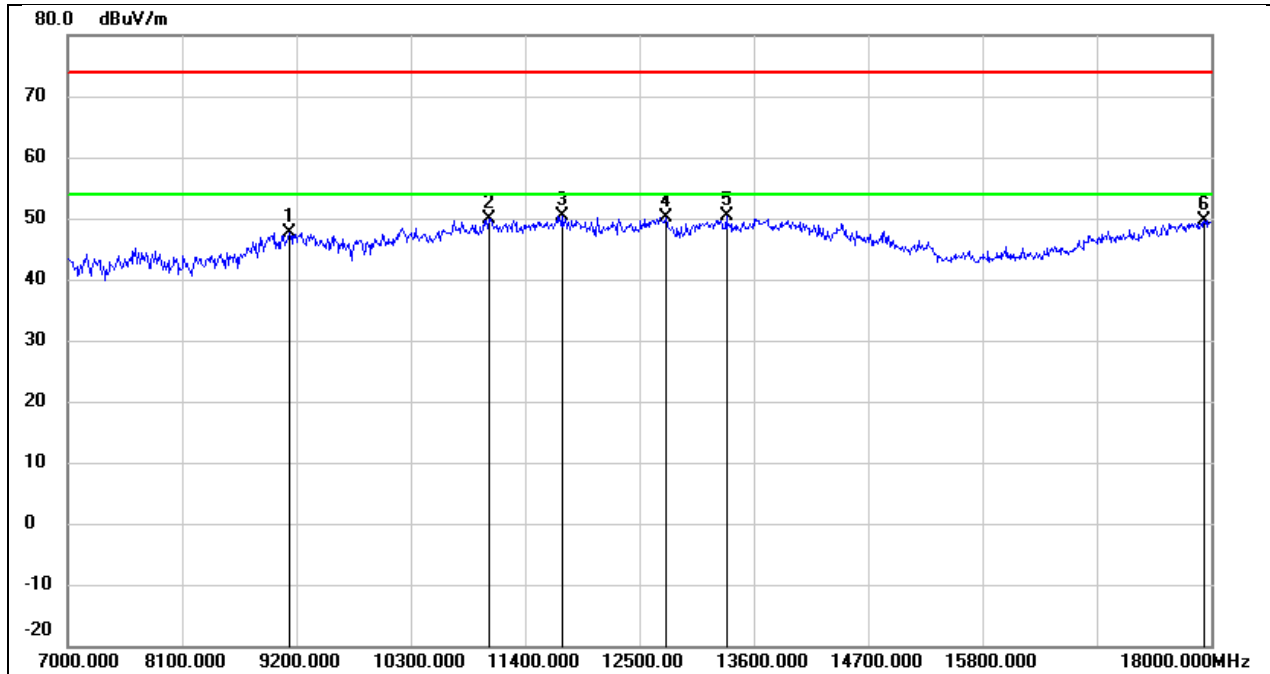


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.30	10.41	47.71	74.00	-26.29	peak
2	11048.000	35.07	14.91	49.98	74.00	-24.02	peak
3	11752.000	33.20	17.24	50.44	74.00	-23.56	peak
4	12753.000	32.03	18.14	50.17	74.00	-23.83	peak
5	13336.000	30.38	19.93	50.31	74.00	-23.69	peak
6	17934.000	23.99	25.67	49.66	74.00	-24.34	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3 V

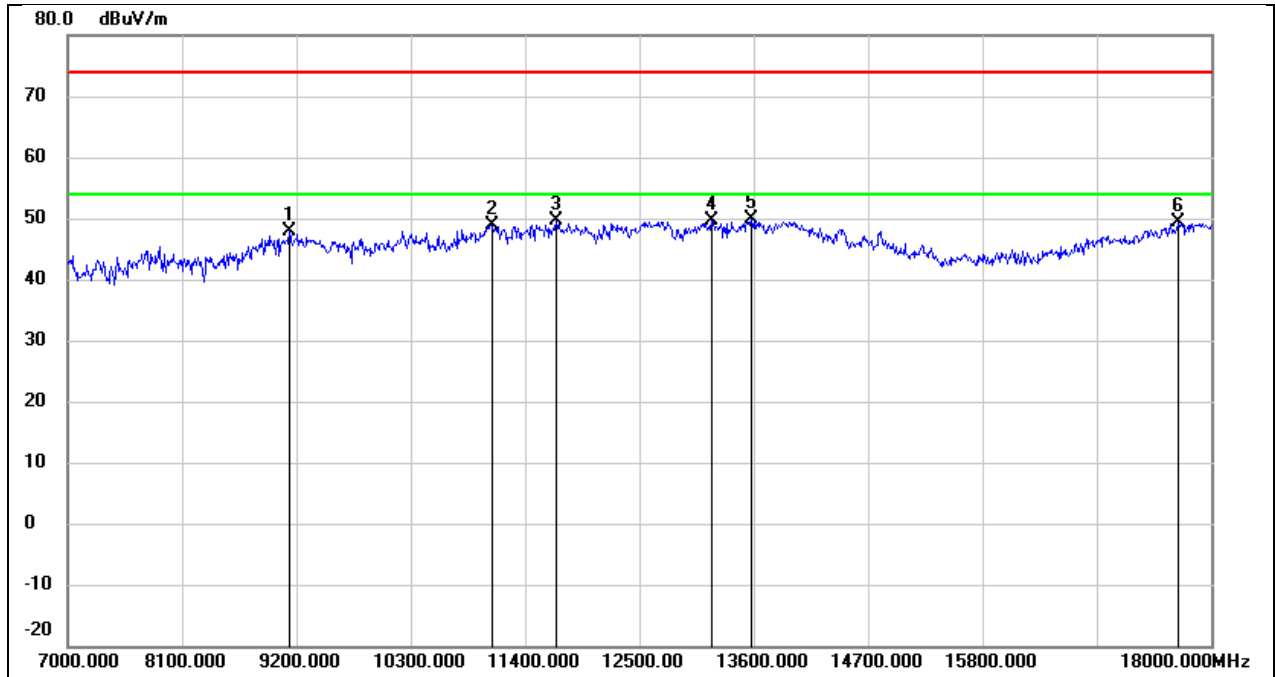


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.54	10.41	47.95	74.00	-26.05	peak
2	11081.000	33.95	15.05	49.00	74.00	-25.00	peak
3	11697.000	32.51	17.13	49.64	74.00	-24.36	peak
4	13193.000	30.31	19.30	49.61	74.00	-24.39	peak
5	13578.000	29.10	20.83	49.93	74.00	-24.07	peak
6	17681.000	25.38	23.94	49.32	74.00	-24.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

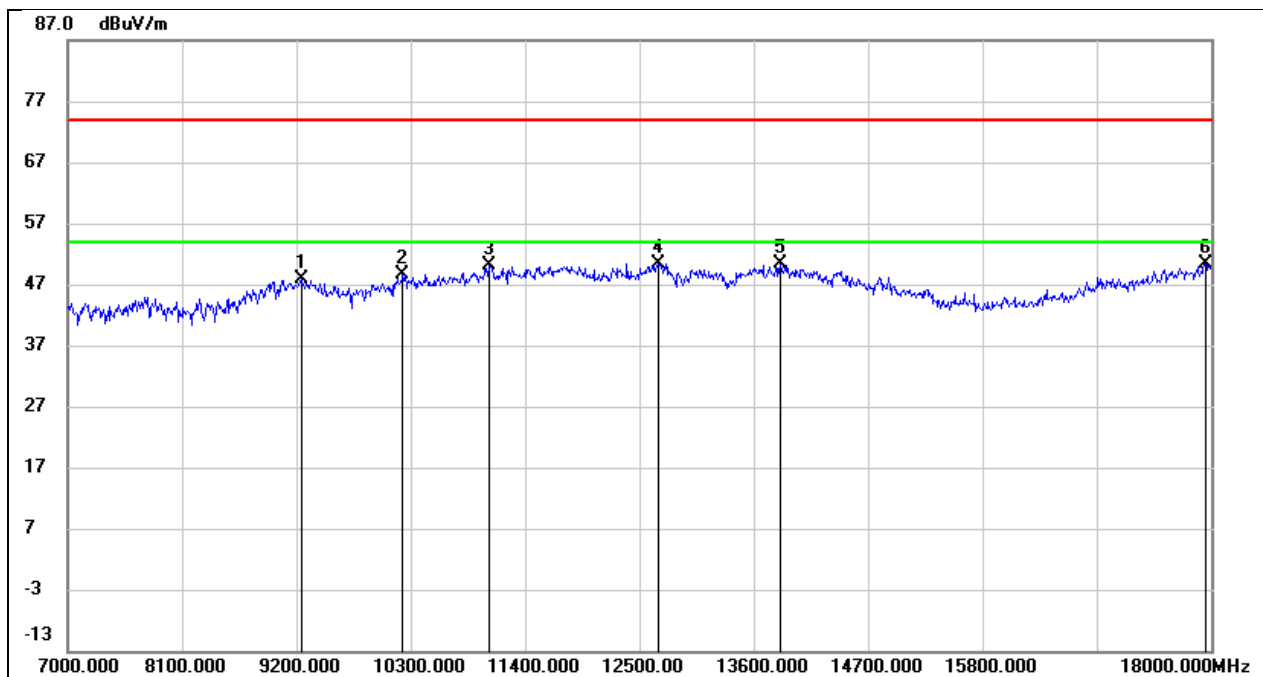


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.45	10.49	47.94	74.00	-26.06	peak
2	10223.000	36.49	12.24	48.73	74.00	-25.27	peak
3	11048.000	35.27	14.91	50.18	74.00	-23.82	peak
4	12676.000	32.44	18.05	50.49	74.00	-23.51	peak
5	13853.000	28.77	21.52	50.29	74.00	-23.71	peak
6	17945.000	24.75	25.75	50.50	74.00	-23.50	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3 V

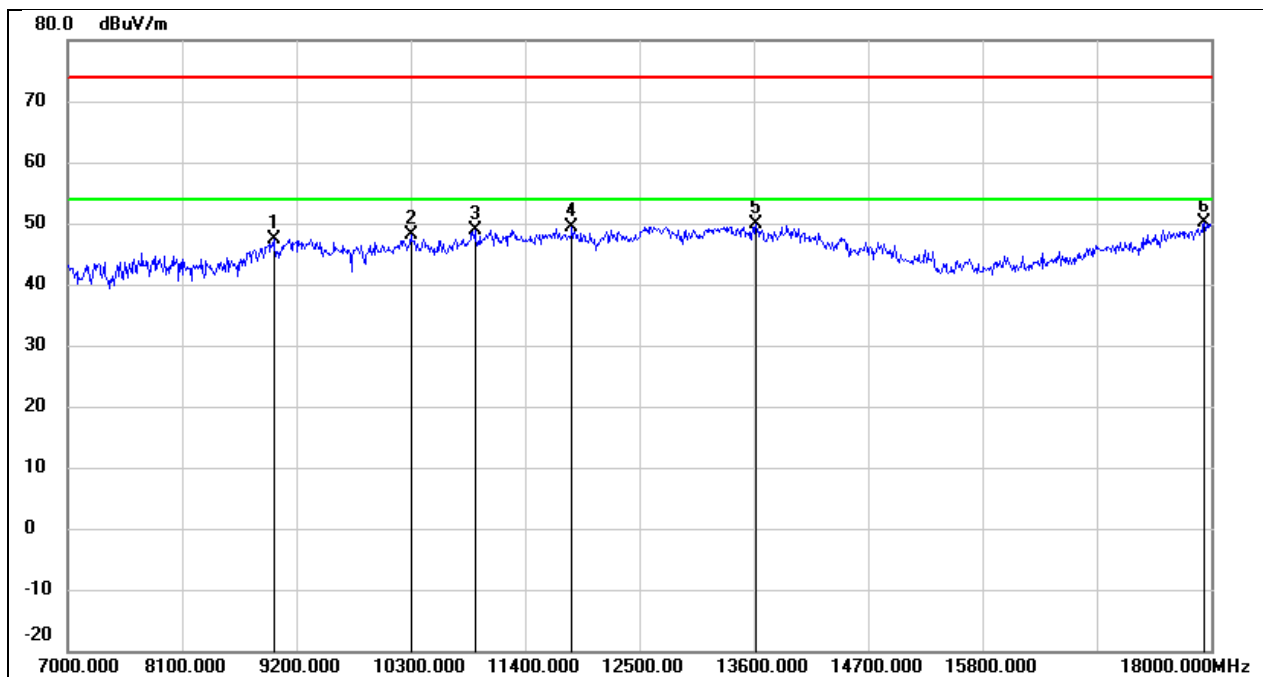


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.17	10.21	47.38	74.00	-26.62	peak
2	10300.000	35.62	12.40	48.02	74.00	-25.98	peak
3	10916.000	34.53	14.39	48.92	74.00	-25.08	peak
4	11851.000	31.99	17.43	49.42	74.00	-24.58	peak
5	13622.000	28.96	20.95	49.91	74.00	-24.09	peak
6	17934.000	24.53	25.67	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

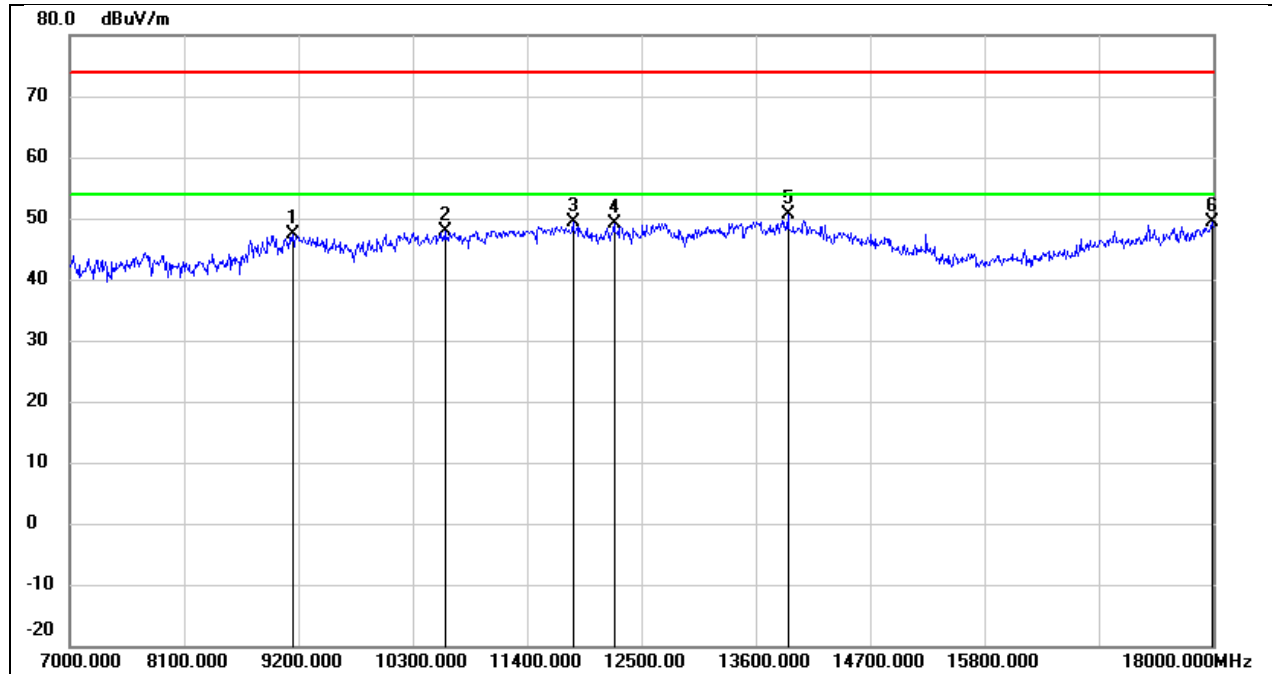


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.91	10.43	47.34	74.00	-26.66	peak
2	10608.000	34.58	13.23	47.81	74.00	-26.19	peak
3	11840.000	31.99	17.40	49.39	74.00	-24.61	peak
4	12236.000	31.42	17.76	49.18	74.00	-24.82	peak
5	13908.000	29.02	21.66	50.68	74.00	-23.32	peak
6	17989.000	23.28	26.04	49.32	74.00	-24.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3 V

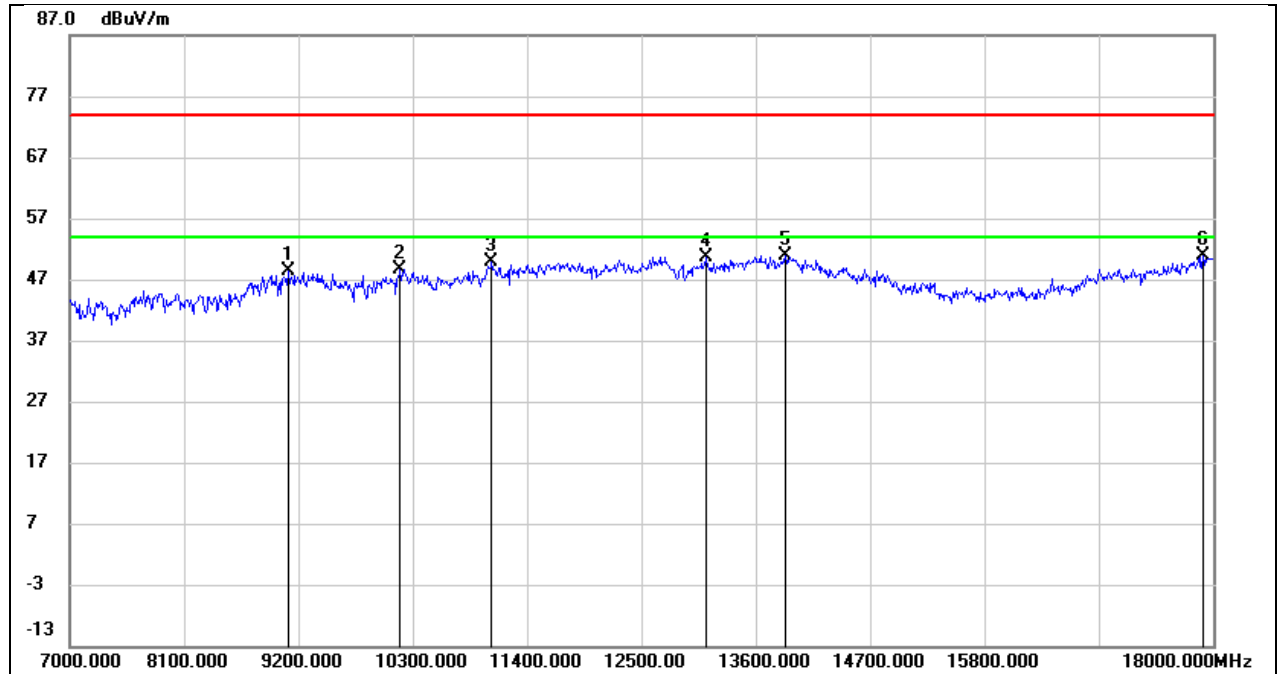


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	38.10	10.40	48.50	74.00	-25.50	peak
2	10179.000	36.61	12.14	48.75	74.00	-25.25	peak
3	11059.000	34.86	14.96	49.82	74.00	-24.18	peak
4	13116.000	31.64	18.96	50.60	74.00	-23.40	peak
5	13886.000	29.38	21.60	50.98	74.00	-23.02	peak
6	17901.000	25.35	25.45	50.80	74.00	-23.20	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

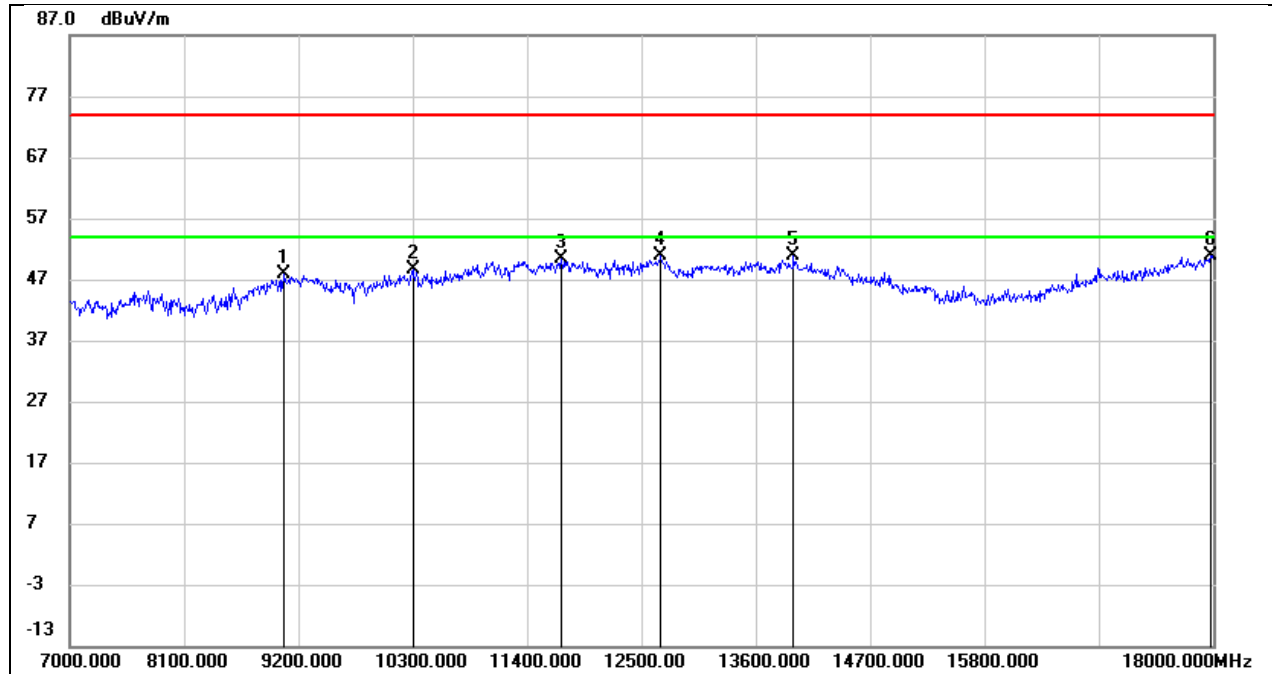


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.41	10.38	47.79	74.00	-26.21	peak
2	10300.000	36.18	12.40	48.58	74.00	-25.42	peak
3	11730.000	33.31	17.19	50.50	74.00	-23.50	peak
4	12687.000	32.72	18.05	50.77	74.00	-23.23	peak
5	13963.000	29.13	21.78	50.91	74.00	-23.09	peak
6	17978.000	25.03	25.97	51.00	74.00	-23.00	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3 V

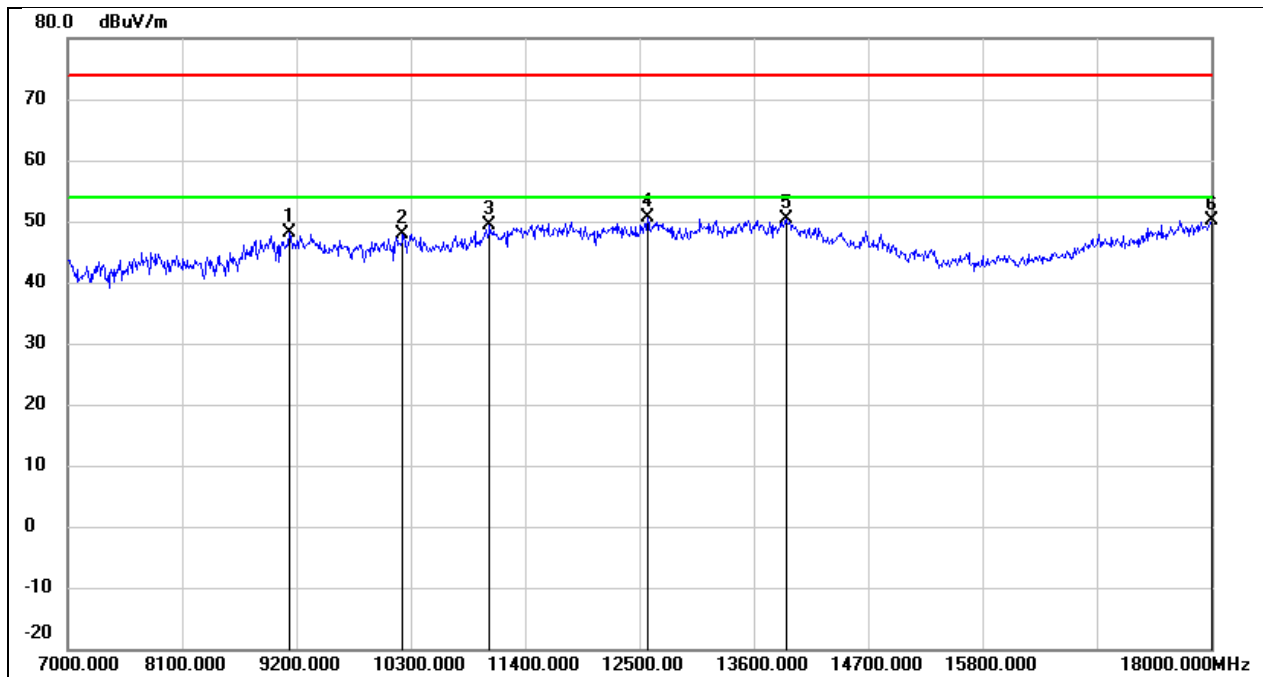


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.78	10.41	48.19	74.00	-25.81	peak
2	10223.000	35.61	12.24	47.85	74.00	-26.15	peak
3	11059.000	34.52	14.96	49.48	74.00	-24.52	peak
4	12577.000	32.65	17.93	50.58	74.00	-23.42	peak
5	13908.000	28.84	21.66	50.50	74.00	-23.50	peak
6	18000.000	24.03	26.12	50.15	74.00	-23.85	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

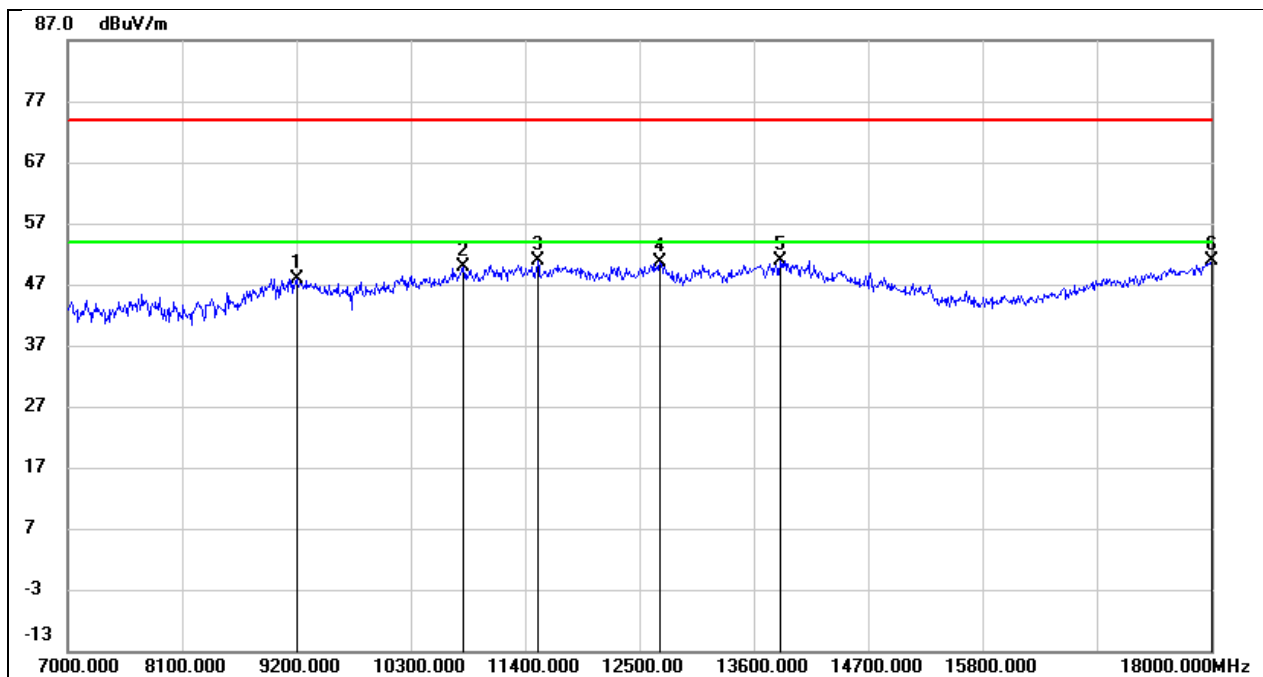


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.52	10.46	47.98	74.00	-26.02	peak
2	10806.000	35.84	13.98	49.82	74.00	-24.18	peak
3	11521.000	34.13	16.82	50.95	74.00	-23.05	peak
4	12698.000	32.43	18.08	50.51	74.00	-23.49	peak
5	13853.000	29.37	21.52	50.89	74.00	-23.11	peak
6	18000.000	24.79	26.12	50.91	74.00	-23.09	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3 V

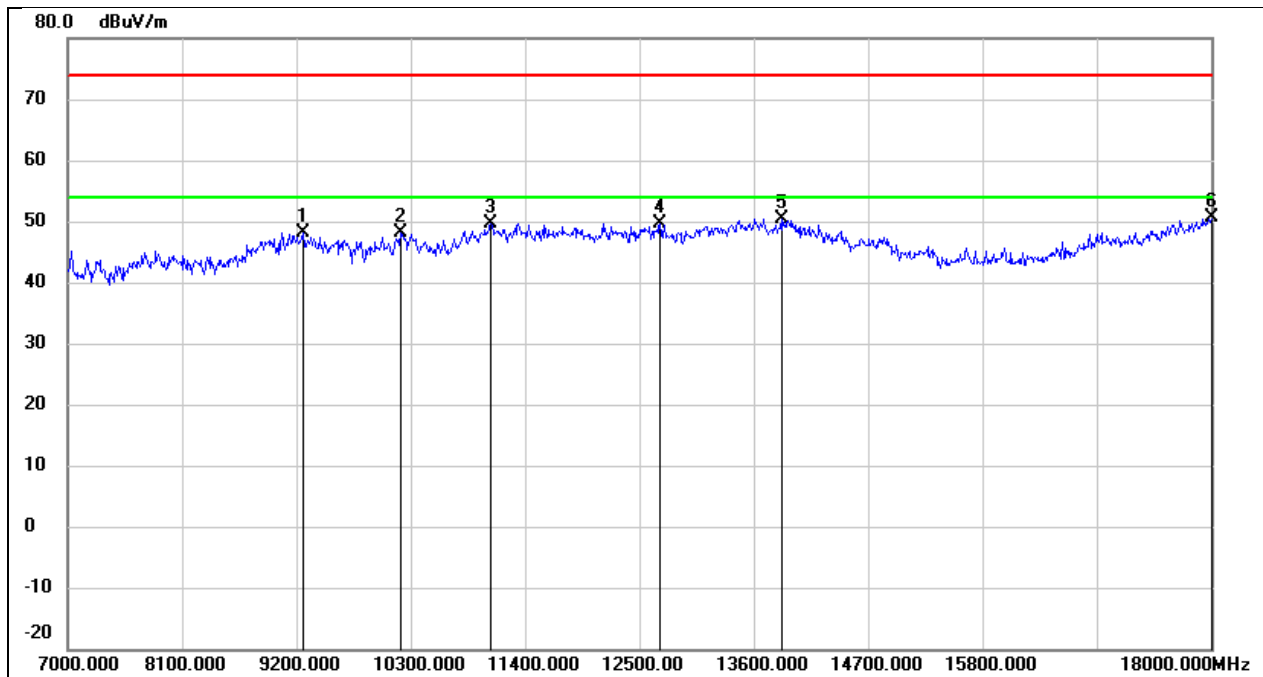


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.60	10.51	48.11	74.00	-25.89	peak
2	10201.000	35.92	12.19	48.11	74.00	-25.89	peak
3	11070.000	34.66	15.01	49.67	74.00	-24.33	peak
4	12698.000	31.57	18.08	49.65	74.00	-24.35	peak
5	13864.000	28.94	21.53	50.47	74.00	-23.53	peak
6	18000.000	24.40	26.12	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

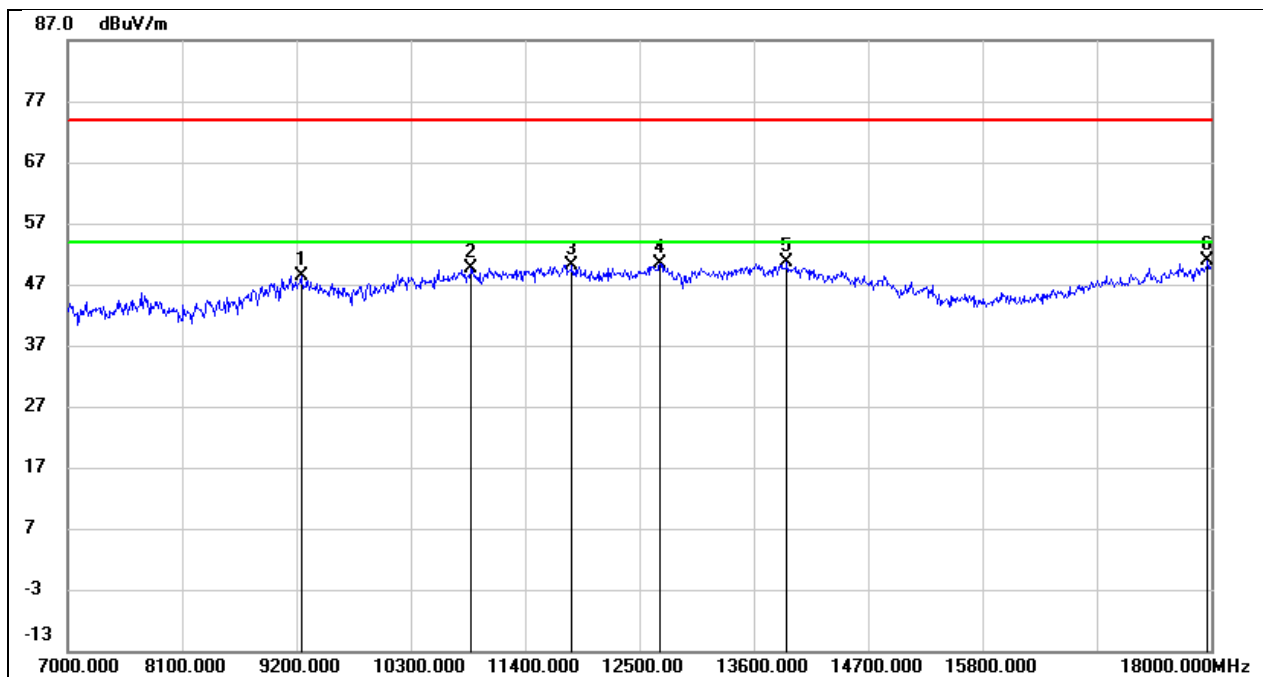


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.86	10.49	48.35	74.00	-25.65	peak
2	10883.000	35.36	14.27	49.63	74.00	-24.37	peak
3	11851.000	32.67	17.43	50.10	74.00	-23.90	peak
4	12698.000	32.26	18.08	50.34	74.00	-23.66	peak
5	13919.000	29.02	21.68	50.70	74.00	-23.30	peak
6	17967.000	24.99	25.89	50.88	74.00	-23.12	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3 V

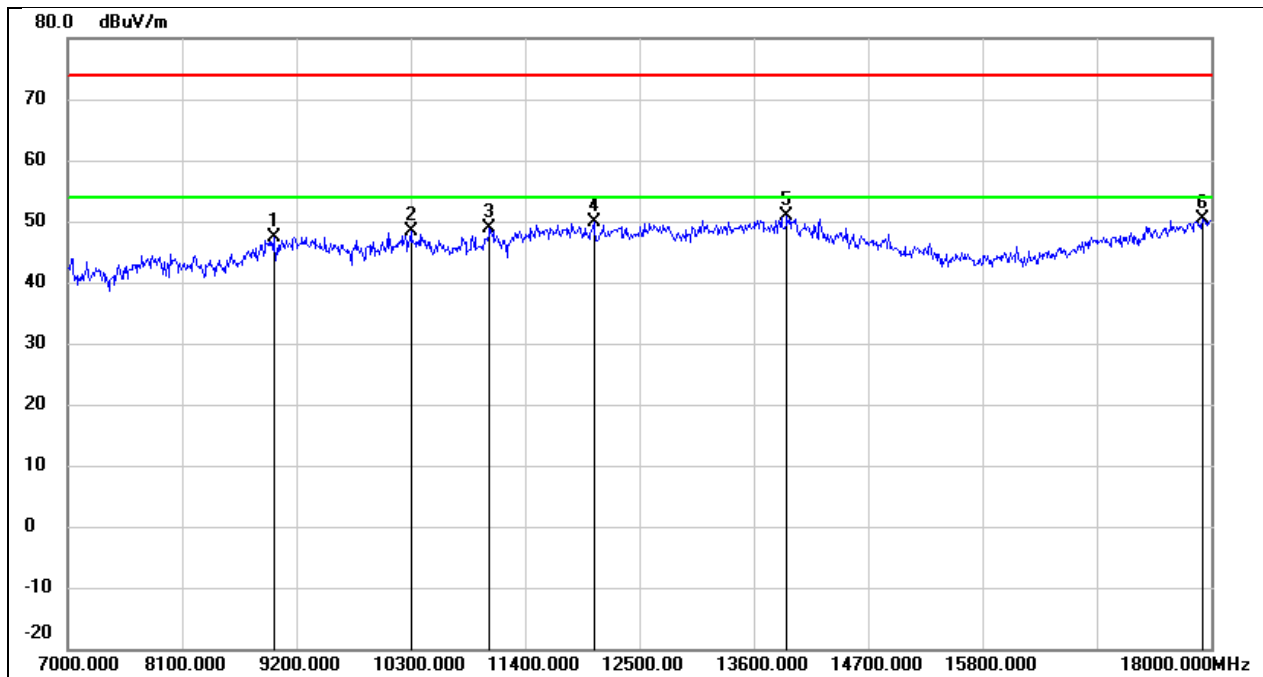


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	37.25	10.21	47.46	74.00	-26.54	peak
2	10300.000	35.97	12.40	48.37	74.00	-25.63	peak
3	11059.000	34.04	14.96	49.00	74.00	-25.00	peak
4	12060.000	32.29	17.71	50.00	74.00	-24.00	peak
5	13919.000	29.16	21.68	50.84	74.00	-23.16	peak
6	17912.000	24.83	25.52	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

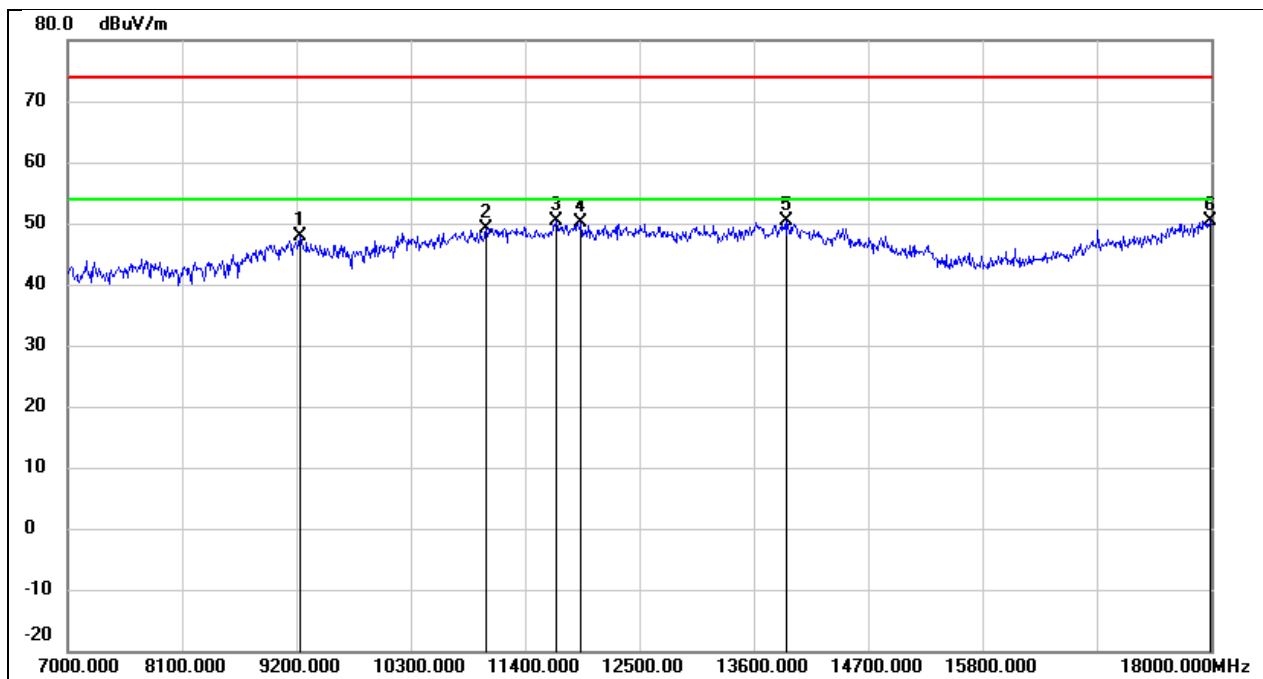


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.44	10.48	47.92	74.00	-26.08	peak
2	11026.000	34.39	14.82	49.21	74.00	-24.79	peak
3	11697.000	33.22	17.13	50.35	74.00	-23.65	peak
4	11939.000	32.49	17.59	50.08	74.00	-23.92	peak
5	13919.000	28.70	21.68	50.38	74.00	-23.62	peak
6	17989.000	24.40	26.04	50.44	74.00	-23.56	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3 V

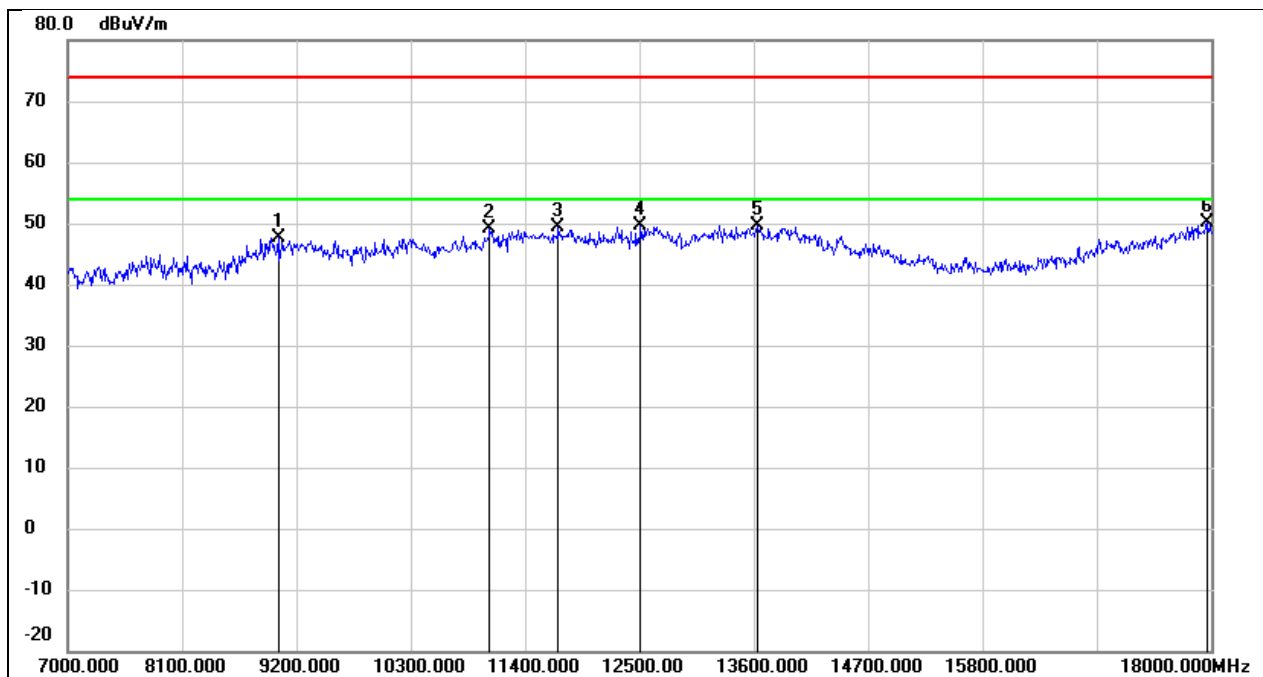


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9024.000	37.40	10.35	47.75	74.00	-26.25	peak
2	11059.000	34.10	14.96	49.06	74.00	-24.94	peak
3	11719.000	32.29	17.18	49.47	74.00	-24.53	peak
4	12511.000	31.84	17.84	49.68	74.00	-24.32	peak
5	13633.000	28.62	20.97	49.59	74.00	-24.41	peak
6	17956.000	24.38	25.82	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

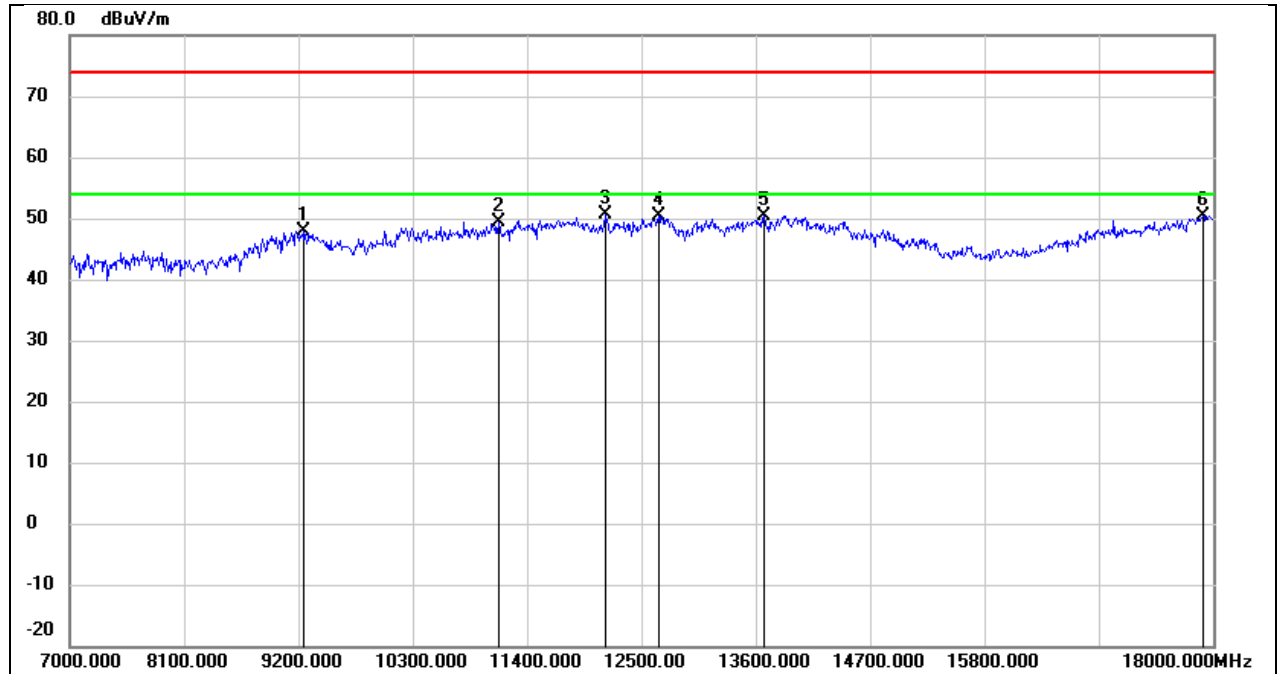


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.45	10.51	47.96	74.00	-26.04	peak
2	11125.000	34.21	15.22	49.43	74.00	-24.57	peak
3	12148.000	32.80	17.74	50.54	74.00	-23.46	peak
4	12665.000	32.46	18.04	50.50	74.00	-23.50	peak
5	13677.000	29.42	21.08	50.50	74.00	-23.50	peak
6	17901.000	24.97	25.45	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3 V

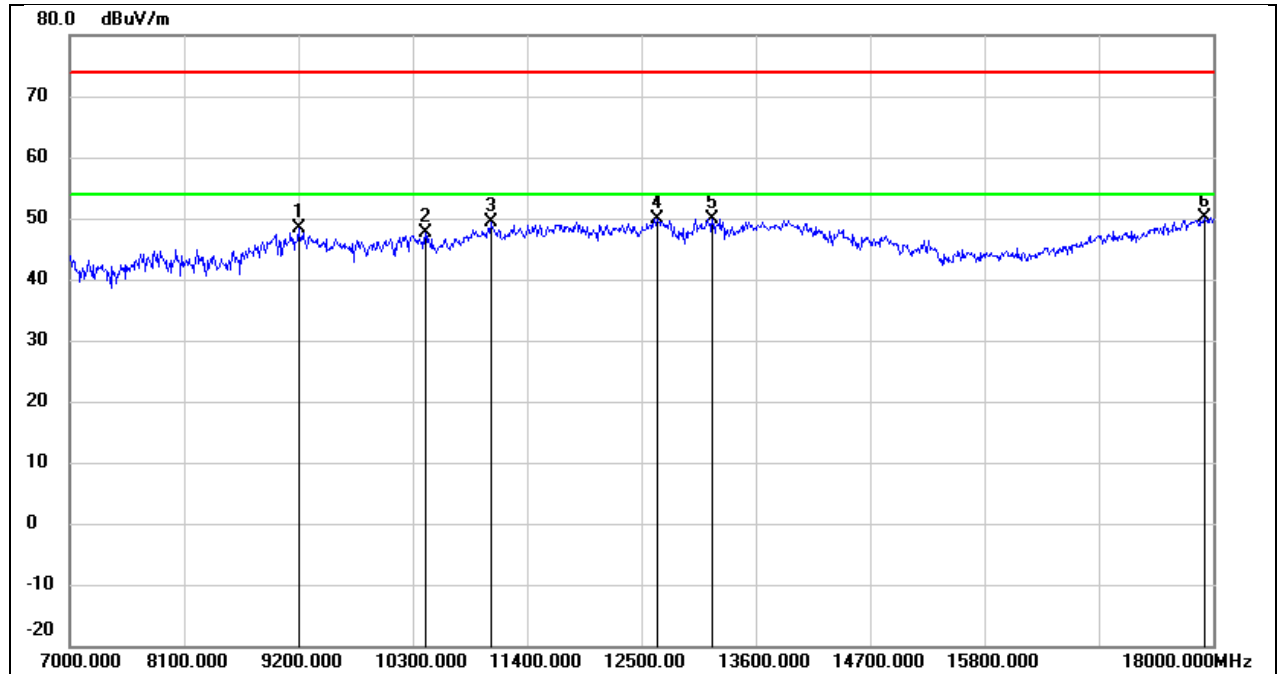


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.84	10.46	48.30	74.00	-25.70	peak
2	10421.000	34.88	12.66	47.54	74.00	-26.46	peak
3	11059.000	34.41	14.96	49.37	74.00	-24.63	peak
4	12654.000	31.80	18.01	49.81	74.00	-24.19	peak
5	13182.000	30.70	19.24	49.94	74.00	-24.06	peak
6	17912.000	24.72	25.52	50.24	74.00	-23.76	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

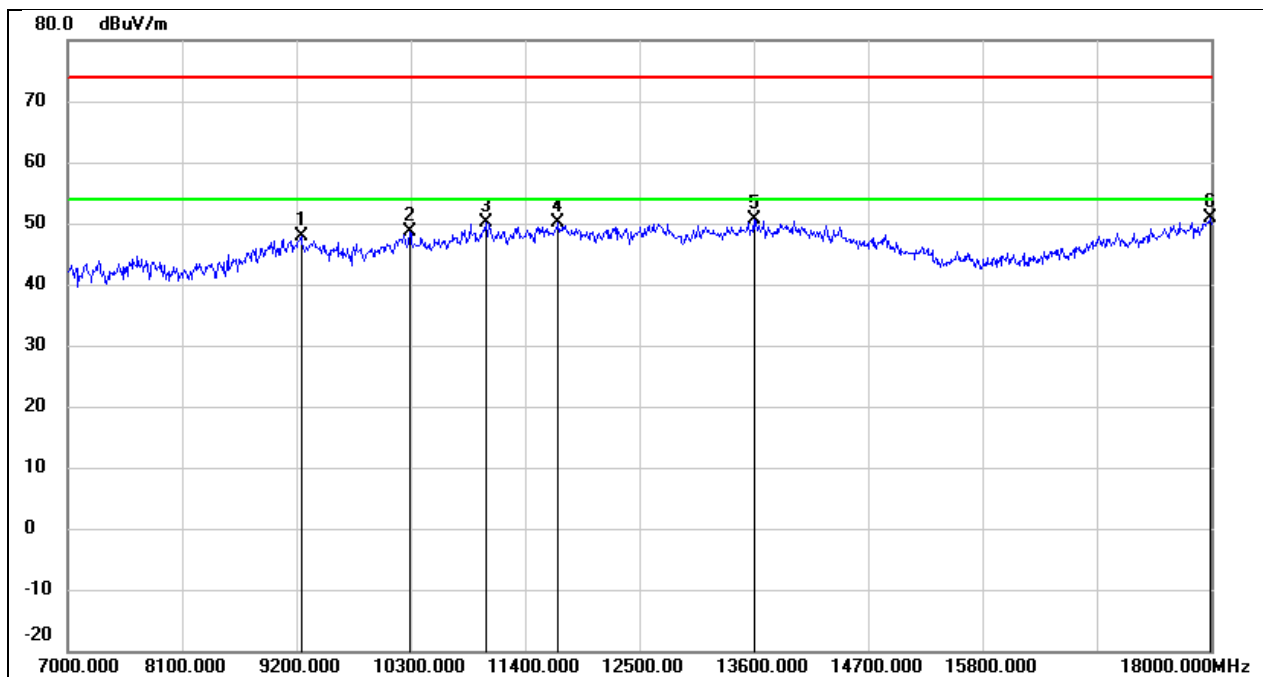


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.48	10.49	47.97	74.00	-26.03	peak
2	10289.000	36.24	12.38	48.62	74.00	-25.38	peak
3	11026.000	35.25	14.82	50.07	74.00	-23.93	peak
4	11719.000	32.85	17.18	50.03	74.00	-23.97	peak
5	13600.000	29.80	20.89	50.69	74.00	-23.31	peak
6	17989.000	24.83	26.04	50.87	74.00	-23.13	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3 V

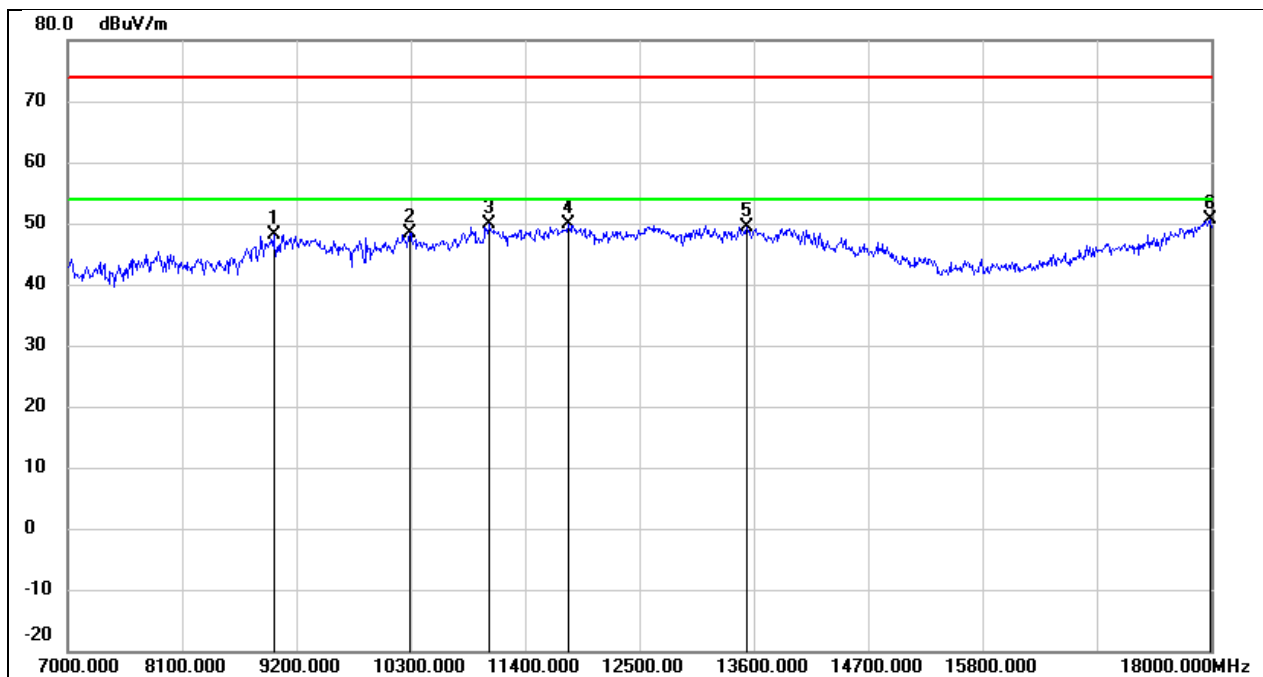


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8980.000	38.00	10.21	48.21	74.00	-25.79	peak
2	10289.000	35.96	12.38	48.34	74.00	-25.66	peak
3	11059.000	34.84	14.96	49.80	74.00	-24.20	peak
4	11818.000	32.62	17.36	49.98	74.00	-24.02	peak
5	13534.000	28.57	20.73	49.30	74.00	-24.70	peak
6	17989.000	24.52	26.04	50.56	74.00	-23.44	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

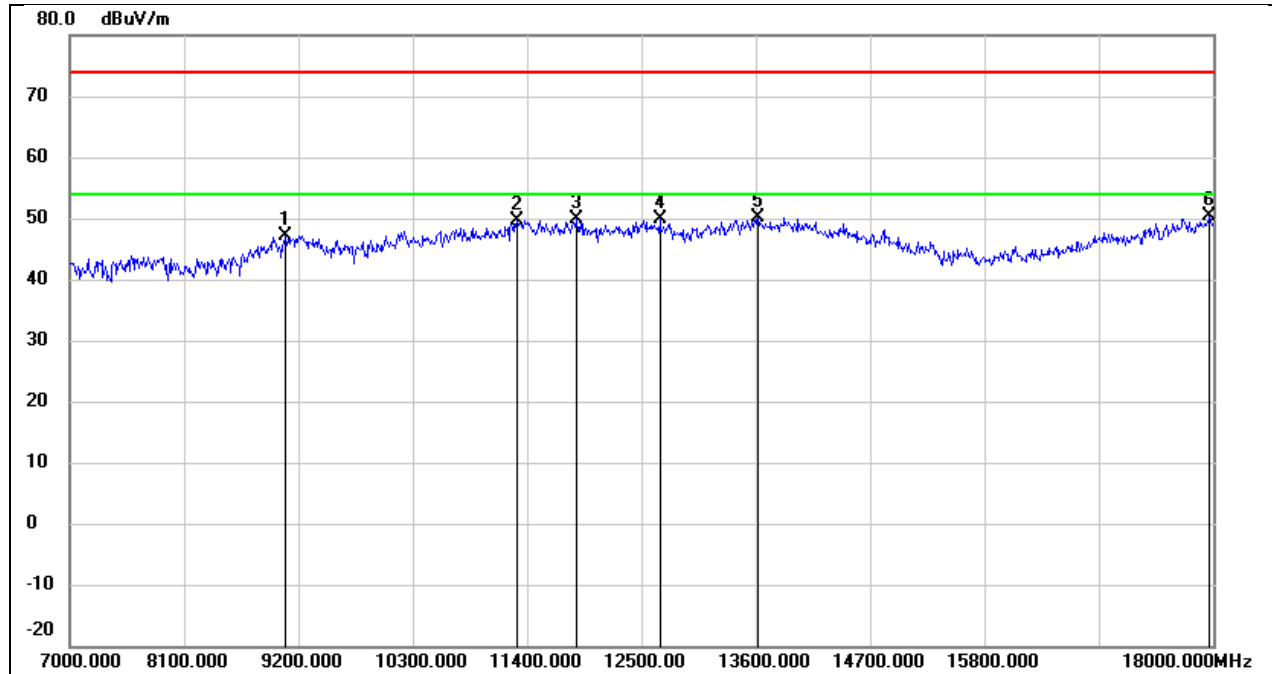


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9079.000	36.75	10.39	47.14	74.00	-26.86	peak
2	11301.000	33.62	15.95	49.57	74.00	-24.43	peak
3	11873.000	32.39	17.46	49.85	74.00	-24.15	peak
4	12676.000	31.73	18.05	49.78	74.00	-24.22	peak
5	13622.000	29.27	20.95	50.22	74.00	-23.78	peak
6	17967.000	24.60	25.89	50.49	74.00	-23.51	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3 V

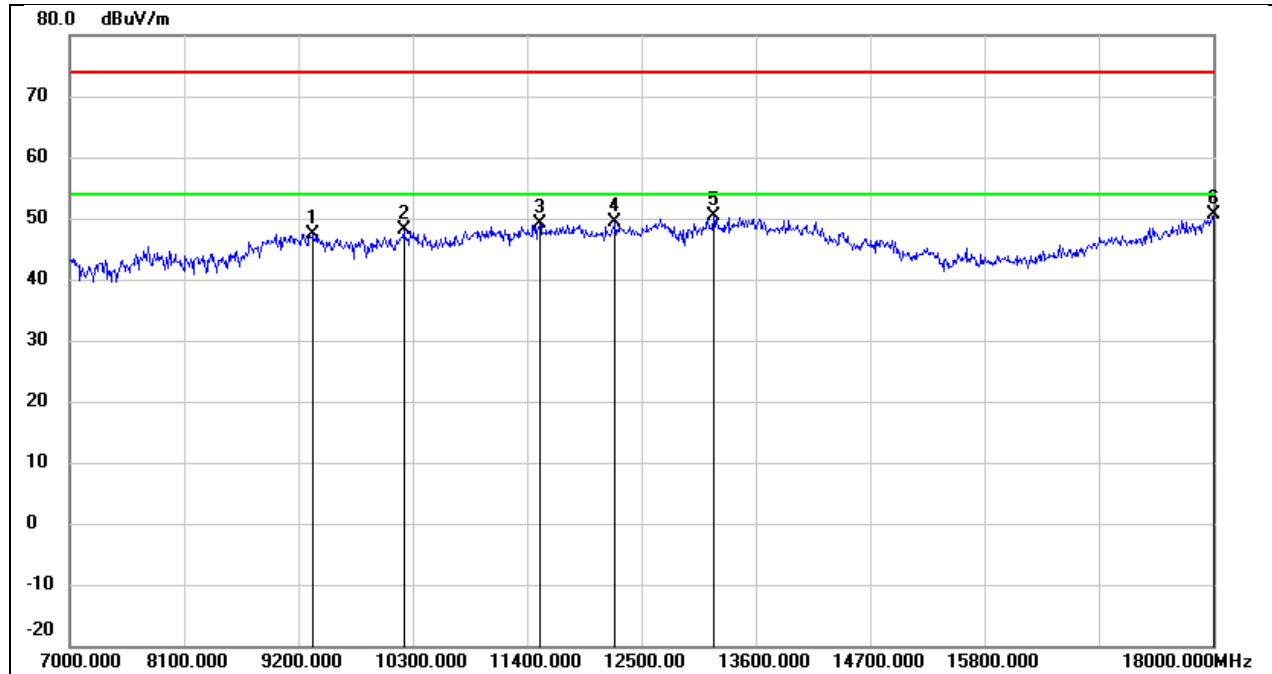


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.92	10.55	47.47	74.00	-26.53	peak
2	10212.000	35.82	12.21	48.03	74.00	-25.97	peak
3	11521.000	32.42	16.82	49.24	74.00	-24.76	peak
4	12247.000	31.53	17.77	49.30	74.00	-24.70	peak
5	13193.000	31.14	19.30	50.44	74.00	-23.56	peak
6	18000.000	24.46	26.12	50.58	74.00	-23.42	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

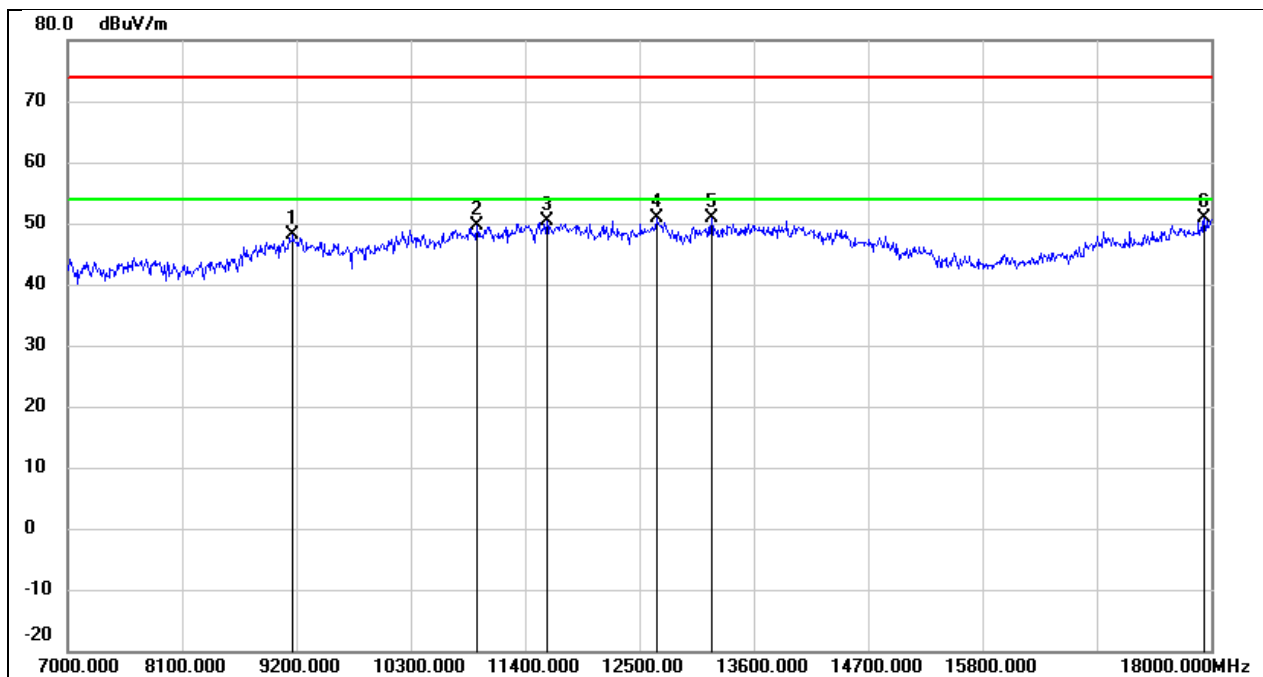


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	37.75	10.45	48.20	74.00	-25.80	peak
2	10938.000	35.21	14.48	49.69	74.00	-24.31	peak
3	11609.000	33.28	16.98	50.26	74.00	-23.74	peak
4	12665.000	32.77	18.04	50.81	74.00	-23.19	peak
5	13193.000	31.50	19.30	50.80	74.00	-23.20	peak
6	17934.000	25.16	25.67	50.83	74.00	-23.17	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3 V

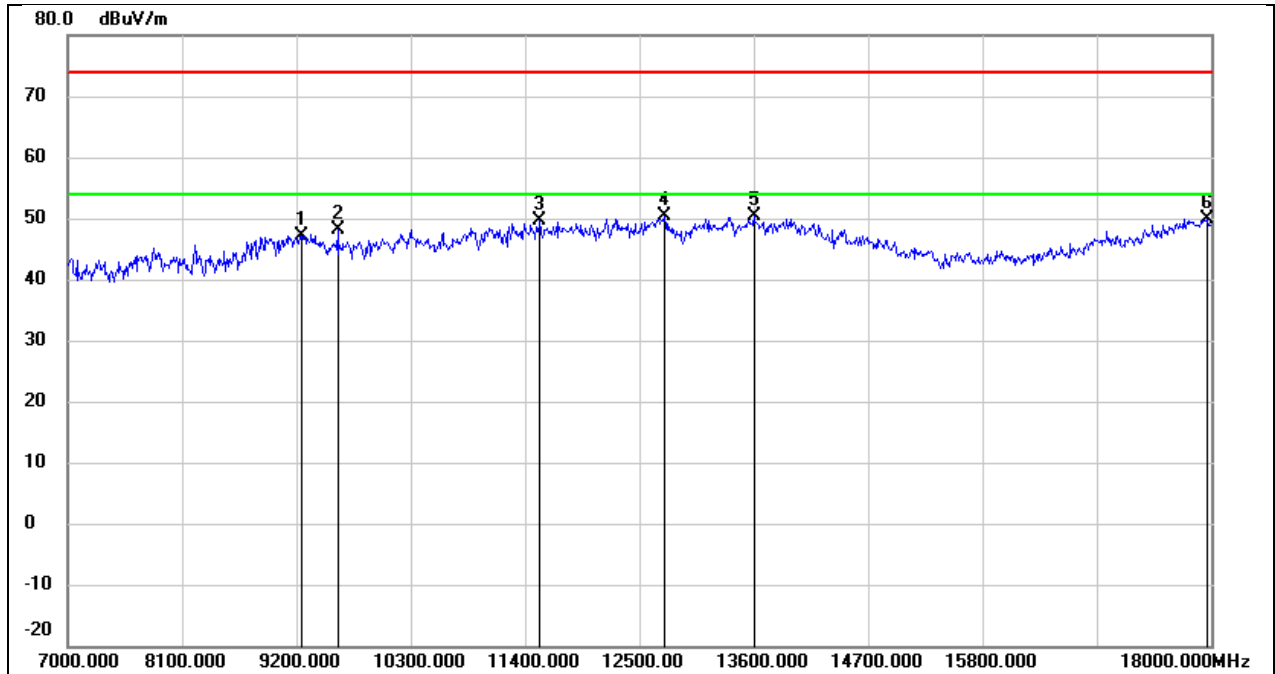


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.66	10.51	47.17	74.00	-26.83	peak
2	9596.000	37.27	10.87	48.14	74.00	-25.86	peak
3	11543.000	32.73	16.84	49.57	74.00	-24.43	peak
4	12742.000	32.28	18.13	50.41	74.00	-23.59	peak
5	13600.000	29.45	20.89	50.34	74.00	-23.66	peak
6	17956.000	24.10	25.82	49.92	74.00	-24.08	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

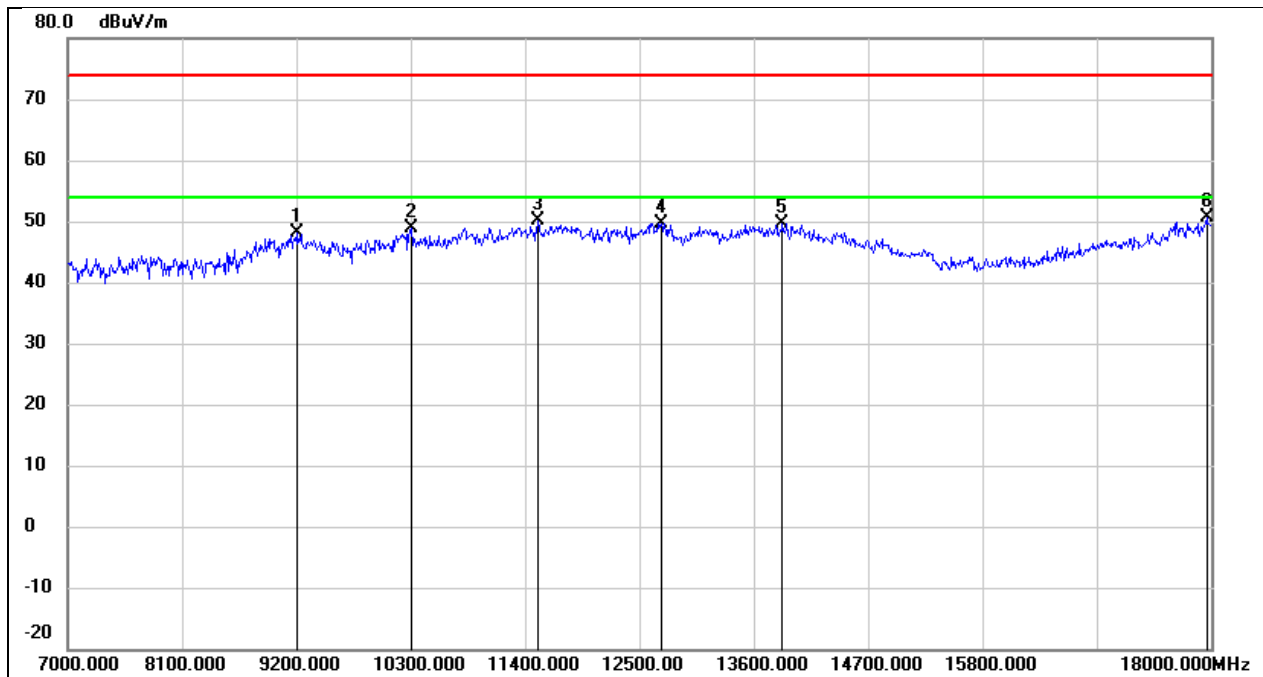


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.70	10.47	48.17	74.00	-25.83	peak
2	10311.000	36.55	12.42	48.97	74.00	-25.03	peak
3	11521.000	33.36	16.82	50.18	74.00	-23.82	peak
4	12709.000	31.50	18.09	49.59	74.00	-24.41	peak
5	13875.000	28.11	21.57	49.68	74.00	-24.32	peak
6	17956.000	24.81	25.82	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3 V

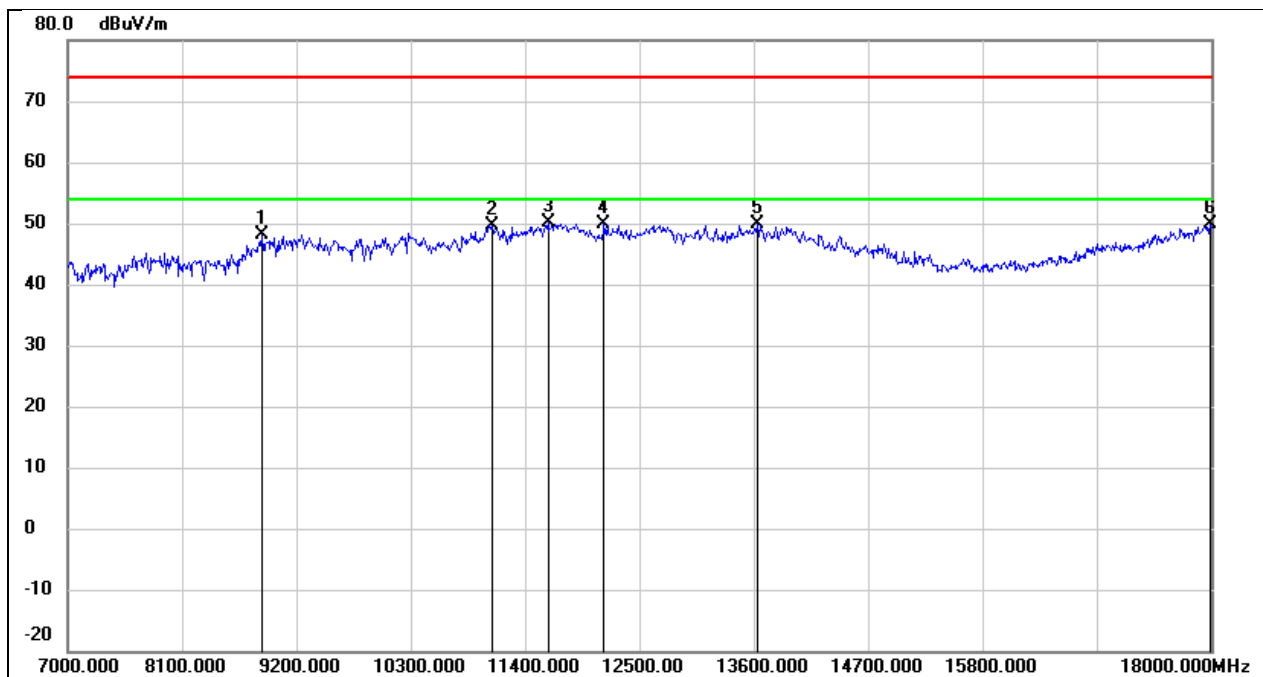


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8870.000	38.68	9.44	48.12	74.00	-25.88	peak
2	11081.000	34.54	15.05	49.59	74.00	-24.41	peak
3	11620.000	33.02	16.99	50.01	74.00	-23.99	peak
4	12159.000	32.27	17.73	50.00	74.00	-24.00	peak
5	13633.000	28.99	20.97	49.96	74.00	-24.04	peak
6	17989.000	23.77	26.04	49.81	74.00	-24.19	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

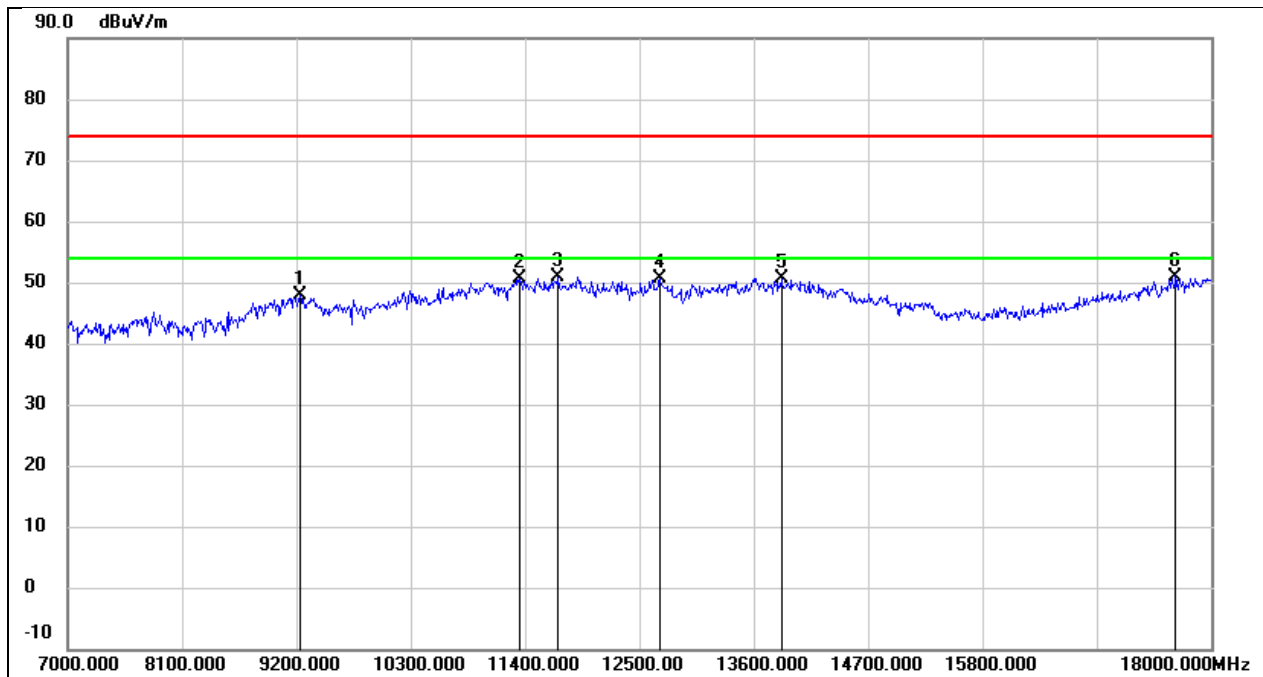

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.49	10.48	47.97	74.00	-26.03	peak
2	11345.000	34.37	16.14	50.51	74.00	-23.49	peak
3	11719.000	33.63	17.18	50.81	74.00	-23.19	peak
4	12698.000	32.61	18.08	50.69	74.00	-23.31	peak
5	13864.000	29.14	21.53	50.67	74.00	-23.33	peak
6	17659.000	27.22	23.78	51.00	74.00	-23.00	peak


Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3 V

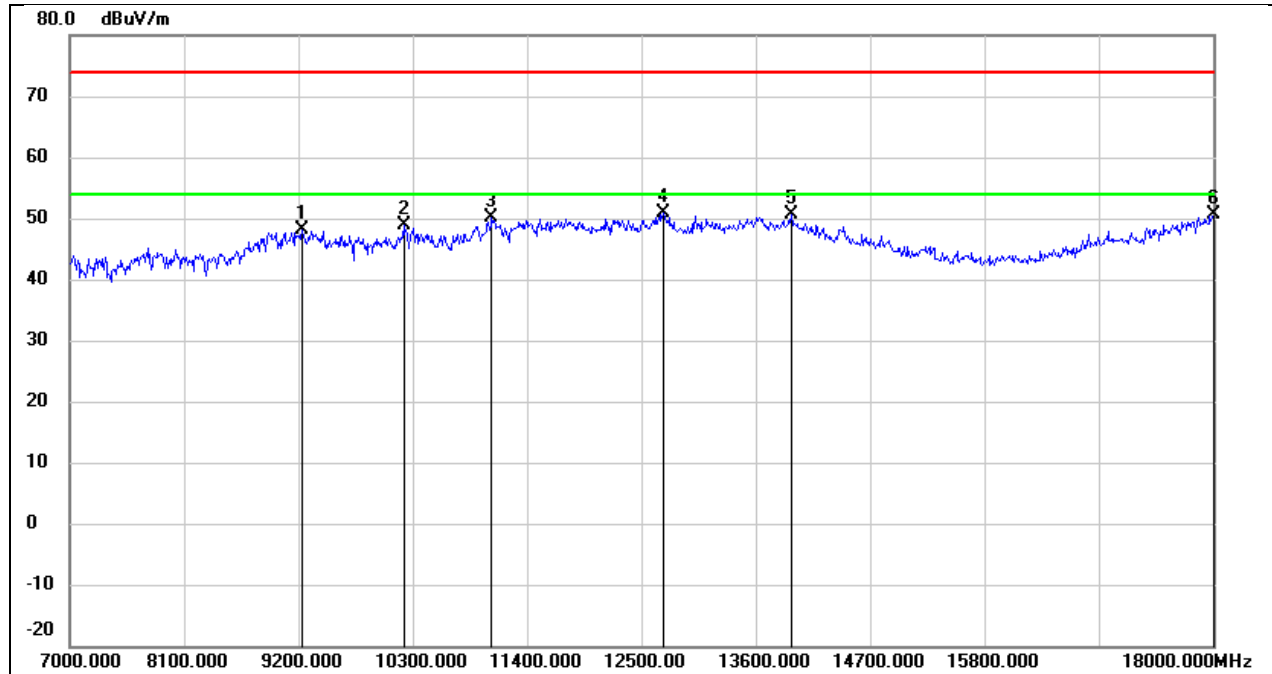

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.64	10.48	48.12	74.00	-25.88	peak
2	10212.000	36.63	12.21	48.84	74.00	-25.16	peak
3	11059.000	35.10	14.96	50.06	74.00	-23.94	peak
4	12709.000	32.86	18.09	50.95	74.00	-23.05	peak
5	13941.000	29.01	21.73	50.74	74.00	-23.26	peak
6	18000.000	24.39	26.12	50.51	74.00	-23.49	peak


8.4. SPURIOUS EMISSIONS (9 KHZ ~ 30 MHZ)

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.3 V

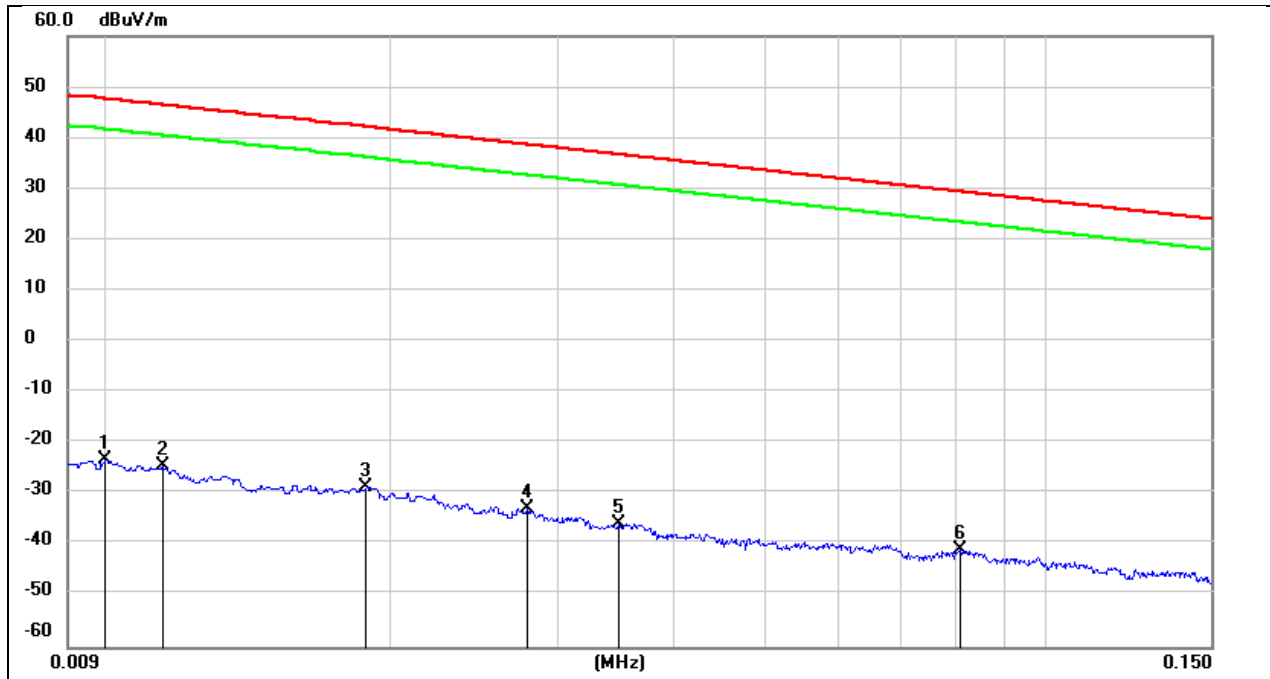


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.01	78.22	-101.4	-23.18	-74.68	47.6	-3.9	-70.78	peak
2	0.0114	76.88	-101.4	-24.52	-76.02	46.46	-5.04	-70.98	peak
3	0.0188	72.64	-101.35	-28.71	-80.21	42.12	-9.38	-70.83	peak
4	0.0279	68.67	-101.38	-32.71	-84.21	38.69	-12.81	-71.40	peak
5	0.0349	65.53	-101.41	-35.88	-87.38	36.75	-14.75	-72.63	peak
6	0.0806	60.68	-101.63	-40.95	-92.45	29.47	-22.03	-70.42	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.3 V

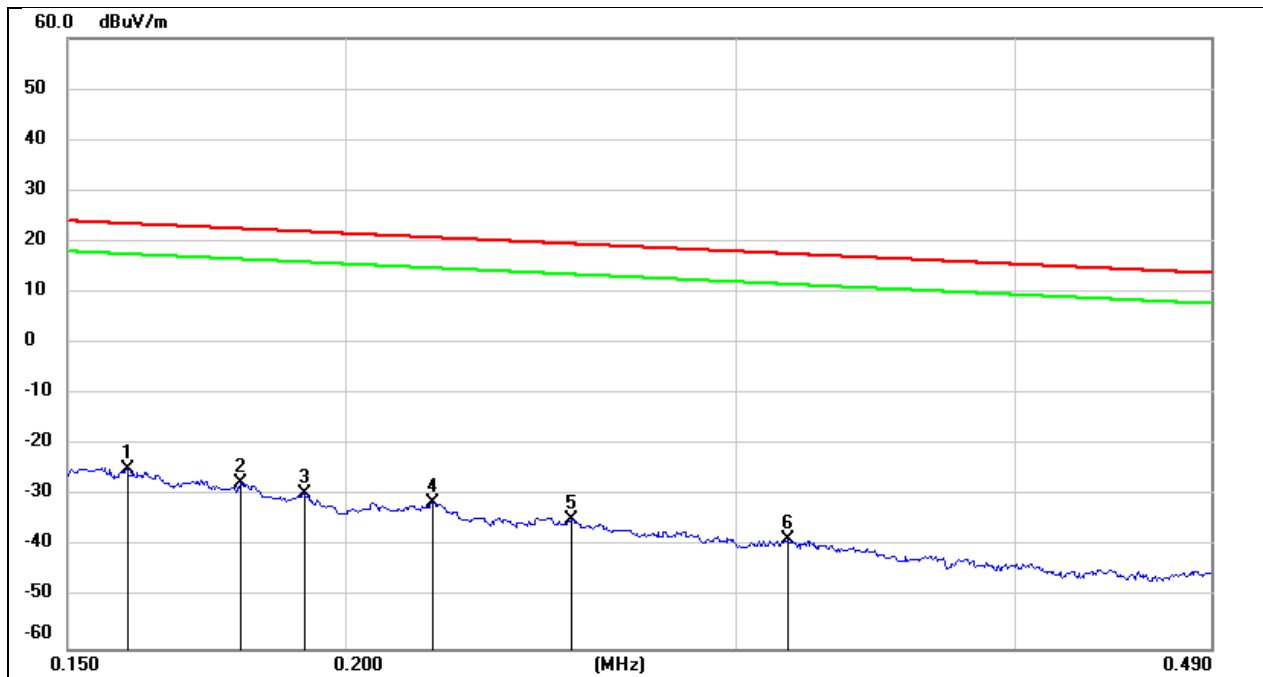

No.	Frequency	Reading	Correct	Result	Result	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuA/m)	(dBuV/m)	(dBuA/m)	(dB)	
1	0.1595	76.86	-101.65	-24.79	-76.29	23.55	-27.95	-48.34	peak
2	0.1794	74.27	-101.68	-27.41	-78.91	22.53	-28.97	-49.94	peak
3	0.1917	72.04	-101.7	-29.66	-81.16	21.95	-29.55	-51.61	peak
4	0.219	70.27	-101.75	-31.48	-82.98	20.79	-30.71	-52.27	peak
5	0.253	67.14	-101.8	-34.66	-86.16	19.54	-31.96	-54.20	peak
6	0.3163	63.2	-101.87	-38.67	-90.17	17.6	-33.9	-56.27	peak


Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Loop Antenna Face On To The EUT	Test Voltage:	DC 3.3 V

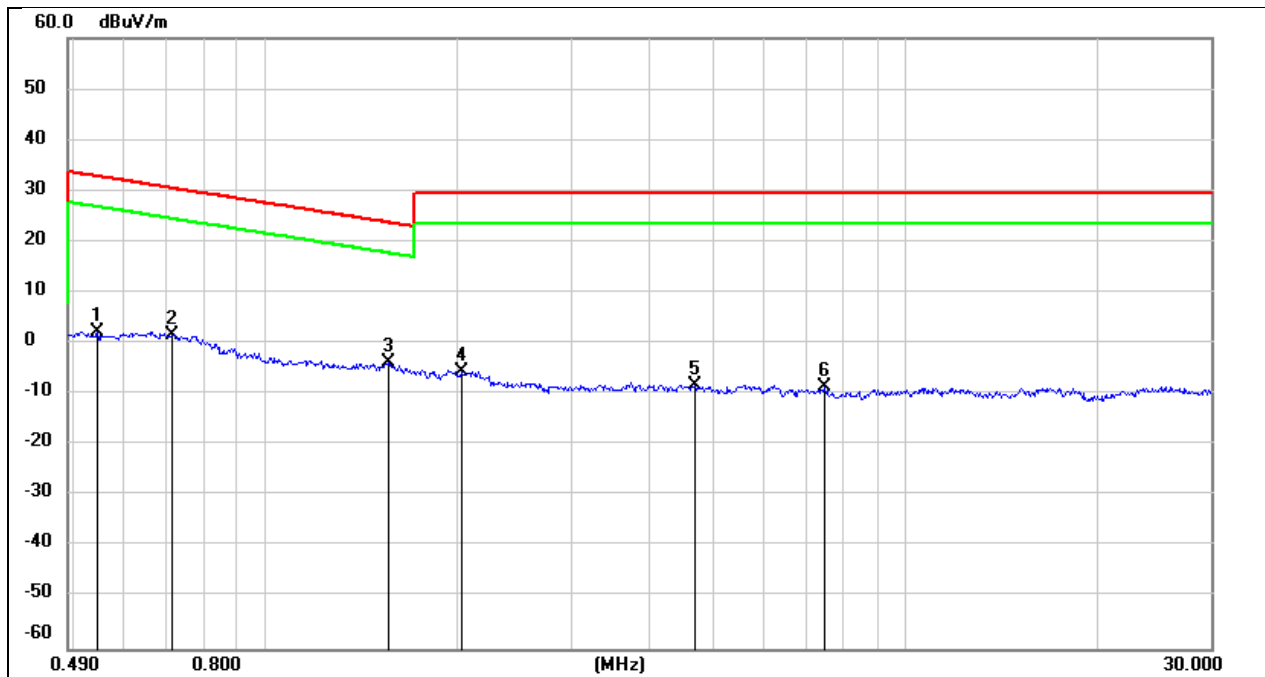

No.	Frequency	Reading	Correct	Result	Result	Limit	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuA/m)	(dBuV/m)	(dBuA/m)	(dB)	
1	0.5453	64.37	-62.08	2.29	-49.21	32.87	-18.63	-30.58	peak
2	0.7125	63.82	-62.12	1.7	-49.80	30.55	-20.95	-28.85	peak
3	1.5564	58.18	-62.02	-3.84	-55.34	23.76	-27.74	-27.60	peak
4	2.0261	56.32	-61.82	-5.5	-57.00	29.54	-21.96	-35.04	peak
5	4.6905	53.32	-61.44	-8.12	-59.62	29.54	-21.96	-37.66	peak
6	7.4839	52.47	-61.15	-8.68	-60.18	29.54	-21.96	-38.22	peak


8.5. SPURIOUS EMISSIONS (18 GHZ ~ 26 GHZ)

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

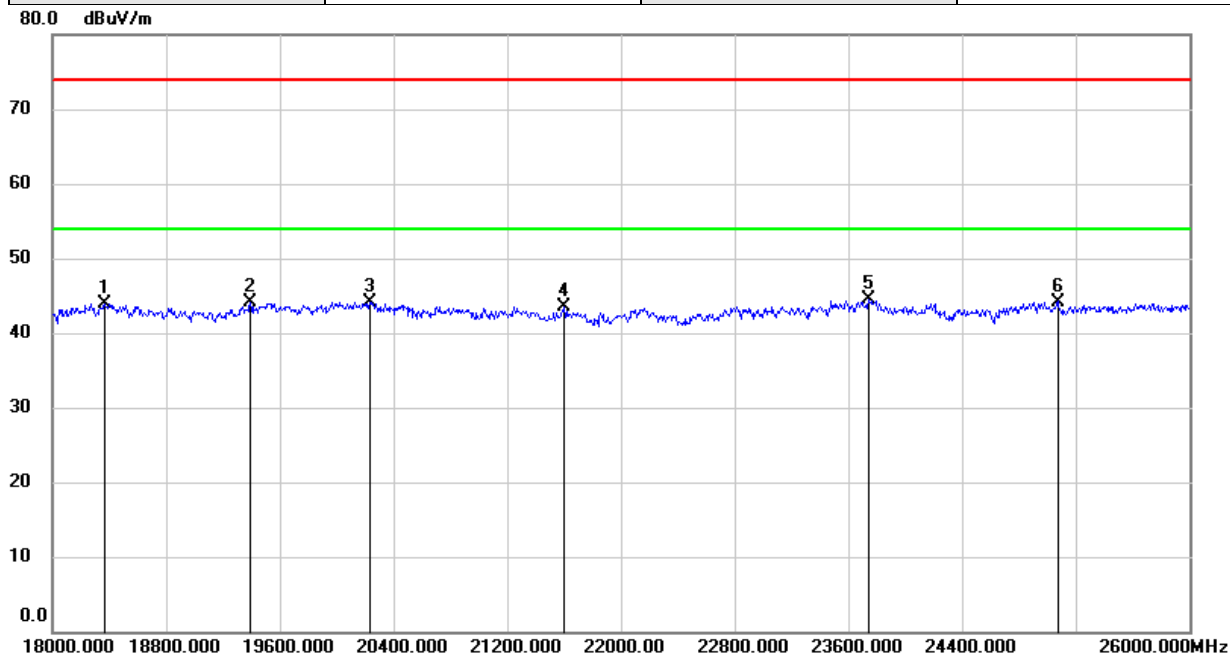

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18368.000	49.29	-5.41	43.88	74.00	-30.12	peak
2	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
3	20232.000	49.71	-5.60	44.11	74.00	-29.89	peak
4	21600.000	48.02	-4.54	43.48	74.00	-30.52	peak
5	23744.000	47.65	-3.20	44.45	74.00	-29.55	peak
6	25072.000	46.17	-1.97	44.20	74.00	-29.80	peak


Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

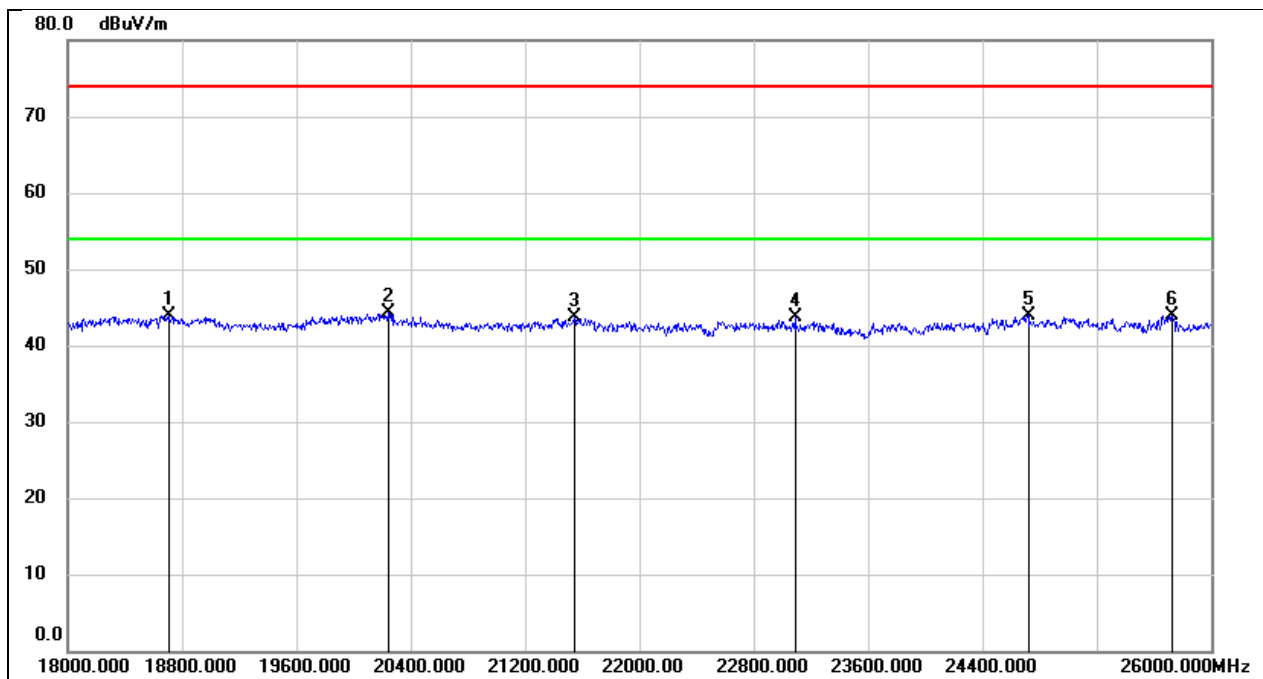

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	49.40	-5.40	44.00	74.00	-30.00	peak
2	20240.000	49.82	-5.61	44.21	74.00	-29.79	peak
3	21544.000	48.26	-4.63	43.63	74.00	-30.37	peak
4	23088.000	47.02	-3.41	43.61	74.00	-30.39	peak
5	24720.000	46.22	-2.33	43.89	74.00	-30.11	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


8.6. SPURIOUS EMISSIONS (26 GHZ ~ 40 GHZ)

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

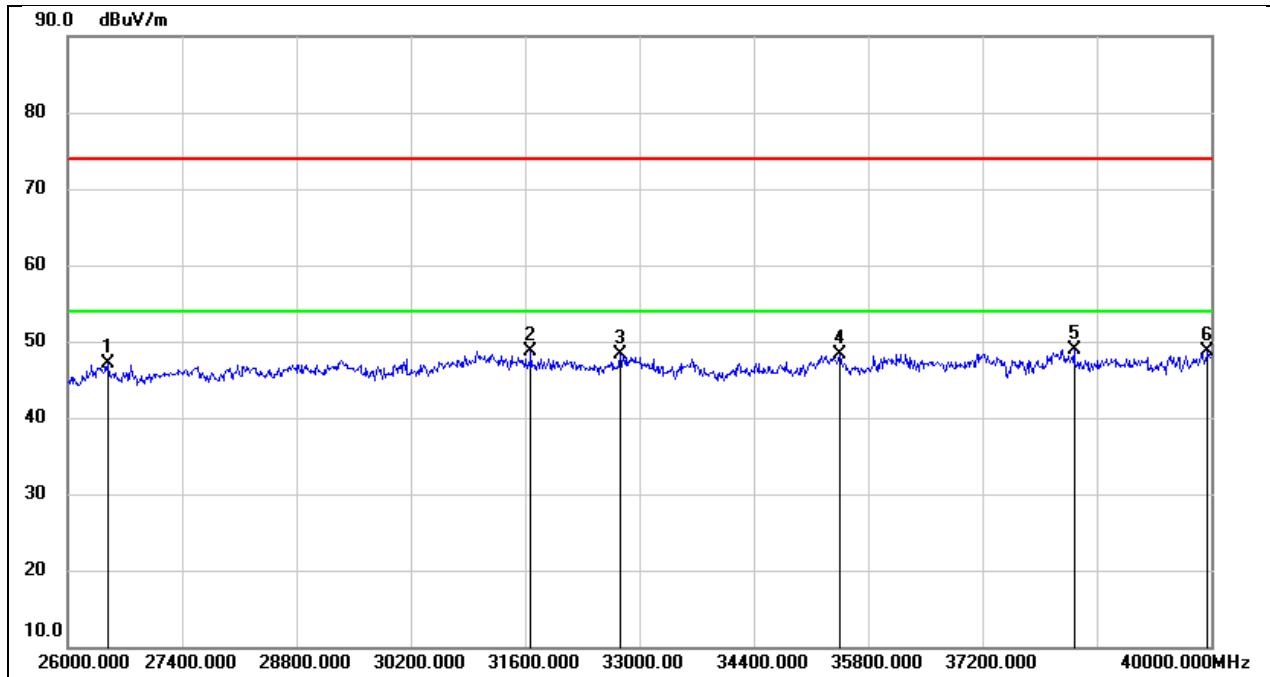

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	51.79	-4.74	47.05	74.00	-26.95	peak
2	31670.000	49.86	-1.21	48.65	74.00	-25.35	peak
3	32762.000	49.45	-1.21	48.24	74.00	-25.76	peak
4	35450.000	45.74	2.55	48.29	74.00	-25.71	peak
5	38320.000	45.06	3.77	48.83	74.00	-25.17	peak
6	39958.000	43.58	5.12	48.70	74.00	-25.30	peak


Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

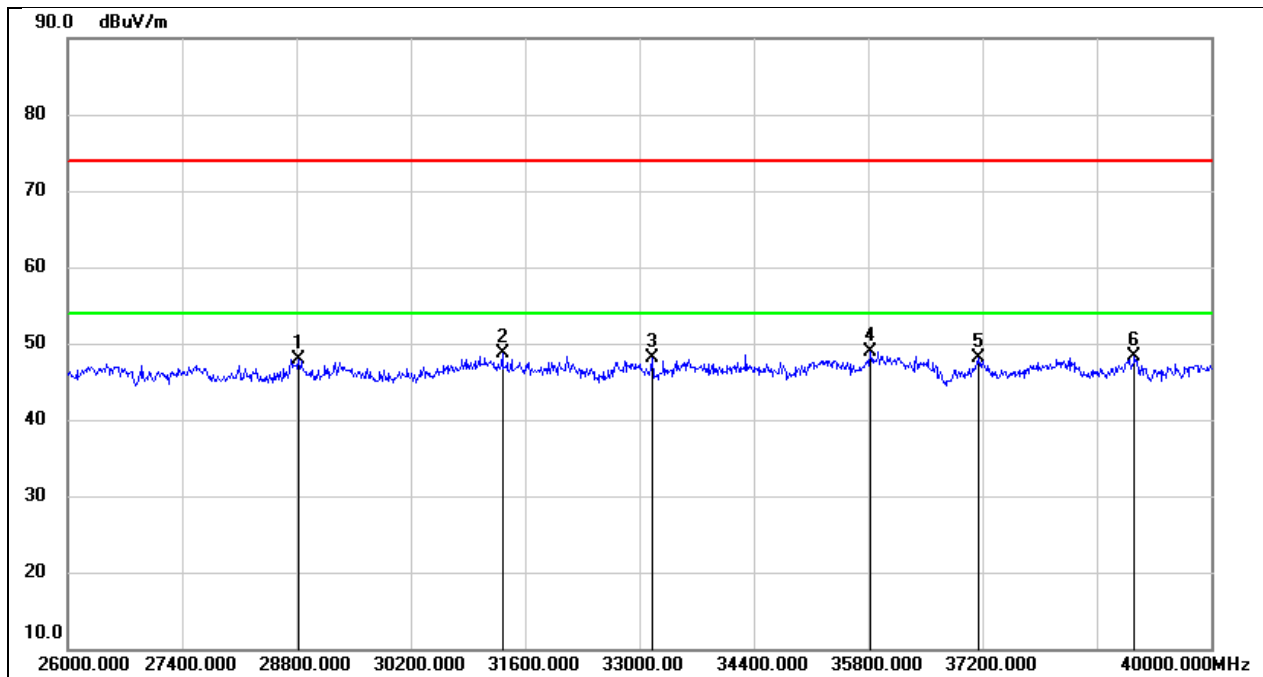

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28828.000	48.63	-0.79	47.84	74.00	-26.16	peak
2	31320.000	49.61	-0.93	48.68	74.00	-25.32	peak
3	33154.000	48.55	-0.54	48.01	74.00	-25.99	peak
4	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
5	37158.000	44.84	3.17	48.01	74.00	-25.99	peak
6	39062.000	43.98	4.30	48.28	74.00	-25.72	peak


8.7. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

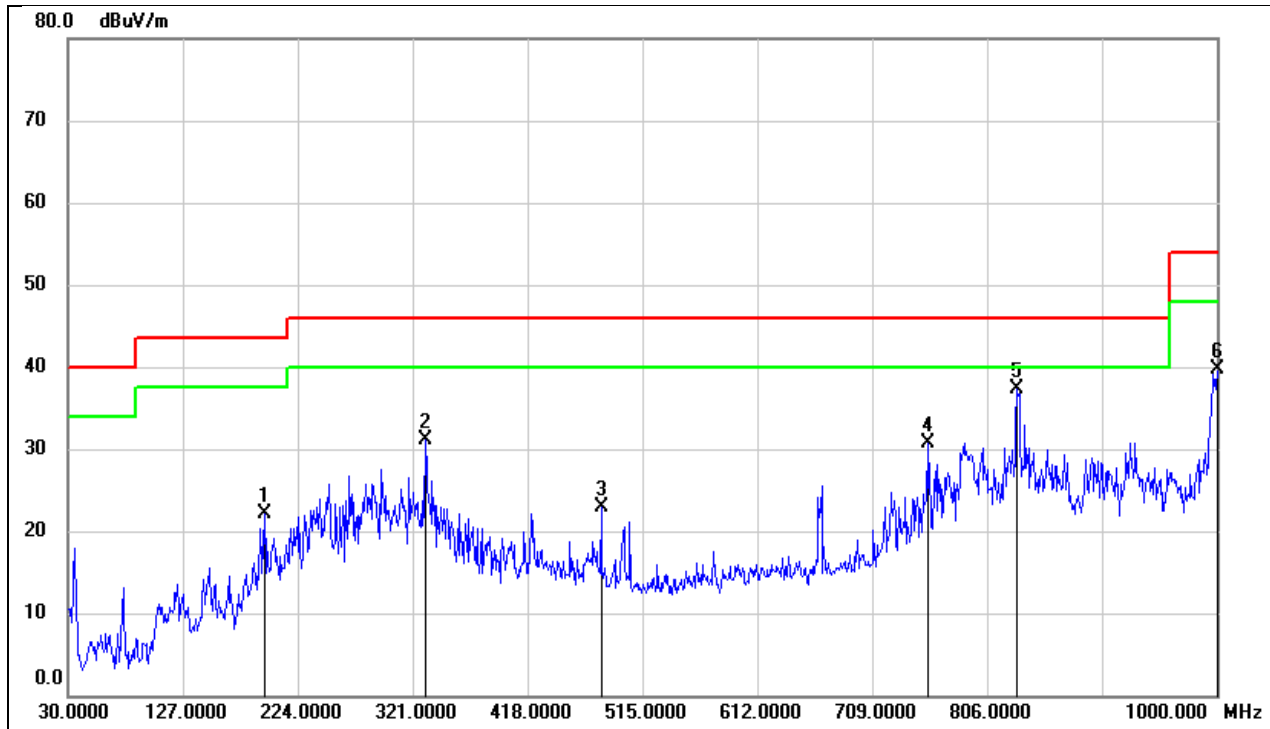

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	195.8700	38.02	-15.89	22.13	43.50	-21.37	QP
2	331.6700	44.37	-13.34	31.03	46.00	-14.97	QP
3	480.0800	33.72	-10.78	22.94	46.00	-23.06	QP
4	755.5600	37.24	-6.61	30.63	46.00	-15.37	QP
5	831.2199	43.49	-6.10	37.39	46.00	-8.61	QP
6	1000.0000	43.29	-3.66	39.63	54.00	-14.37	QP


Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3 V

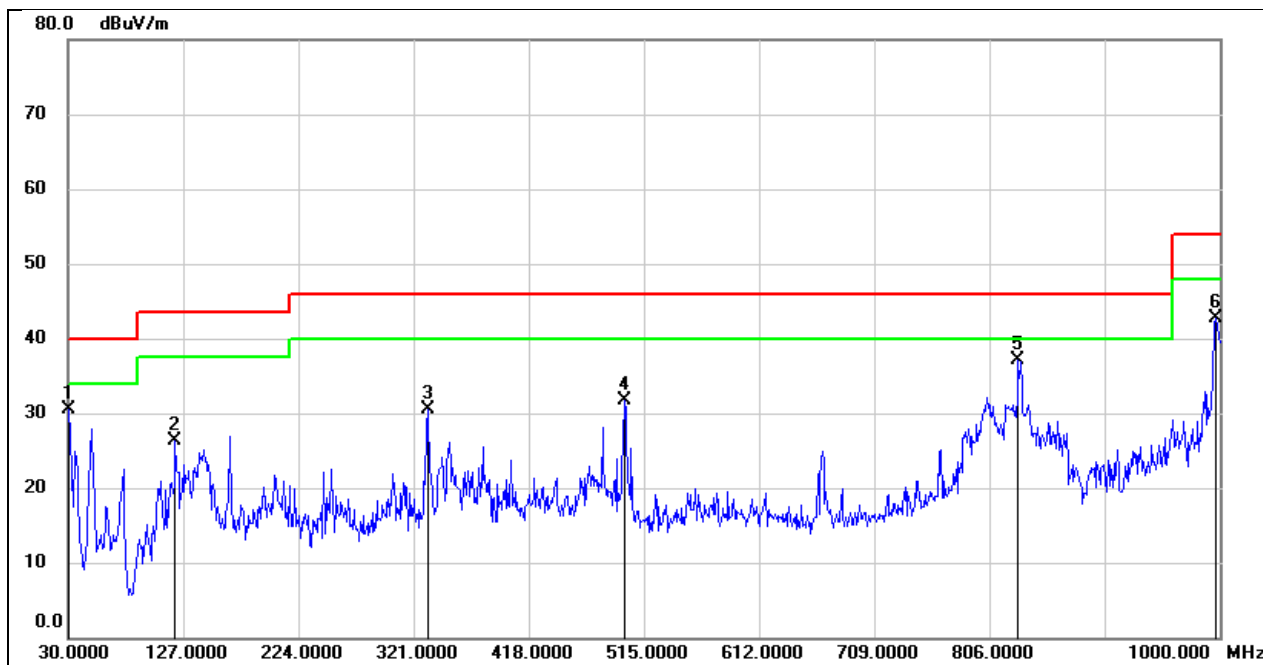

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	48.26	-17.84	30.42	40.00	-9.58	QP
2	120.2100	45.72	-19.36	26.36	43.50	-17.14	QP
3	333.6099	43.70	-13.25	30.45	46.00	-15.55	QP
4	498.5100	42.16	-10.37	31.79	46.00	-14.21	QP
5	830.2500	43.26	-6.12	37.14	46.00	-8.86	QP
6	997.0900	46.37	-3.70	42.67	54.00	-11.33	QP


8.8. RESTRICTED BANDEDGE FOR SIMULTANEOUSLY TRANSMISSION

Test Mode:	BT 8DPSK Mode 2402 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2412 MHz PK		
Polarity:	Vertical	Test Voltage:	DC 3.3 V

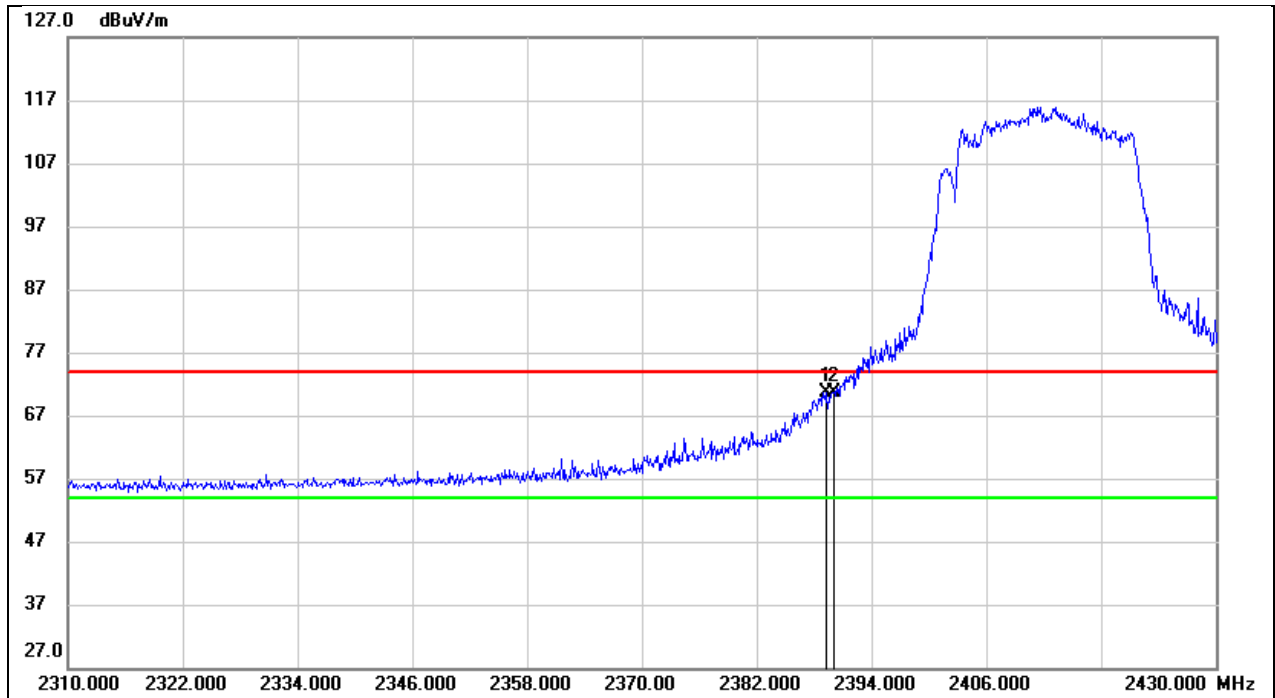

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.320	38.58	32.16	70.74	74.00	-3.26	peak
2	2390.000	38.52	32.16	70.68	74.00	-3.32	peak


Test Mode:	BT 8DPSK Mode 2402 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2412 MHz PK		
Polarity:	Vertical	Test Voltage:	DC 3.3 V

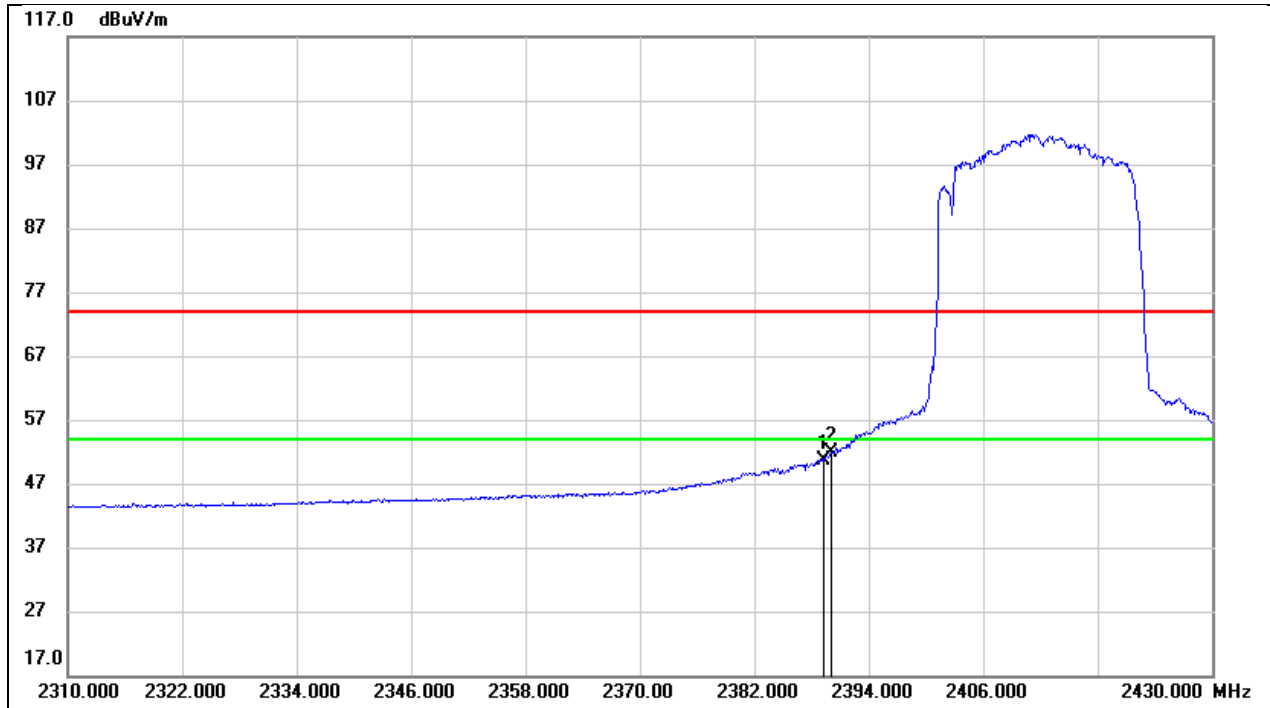

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.320	18.50	32.16	50.66	54.00	-3.34	AVG
2	2390.000	19.60	32.16	51.76	54.00	-2.24	AVG


8.9. SPURIOUS EMISSIONS FOR SIMULTANEOUSLY TRANSMISSION

Test Mode:	BT 8DPSK Mode 2441 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2437 MHz		
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

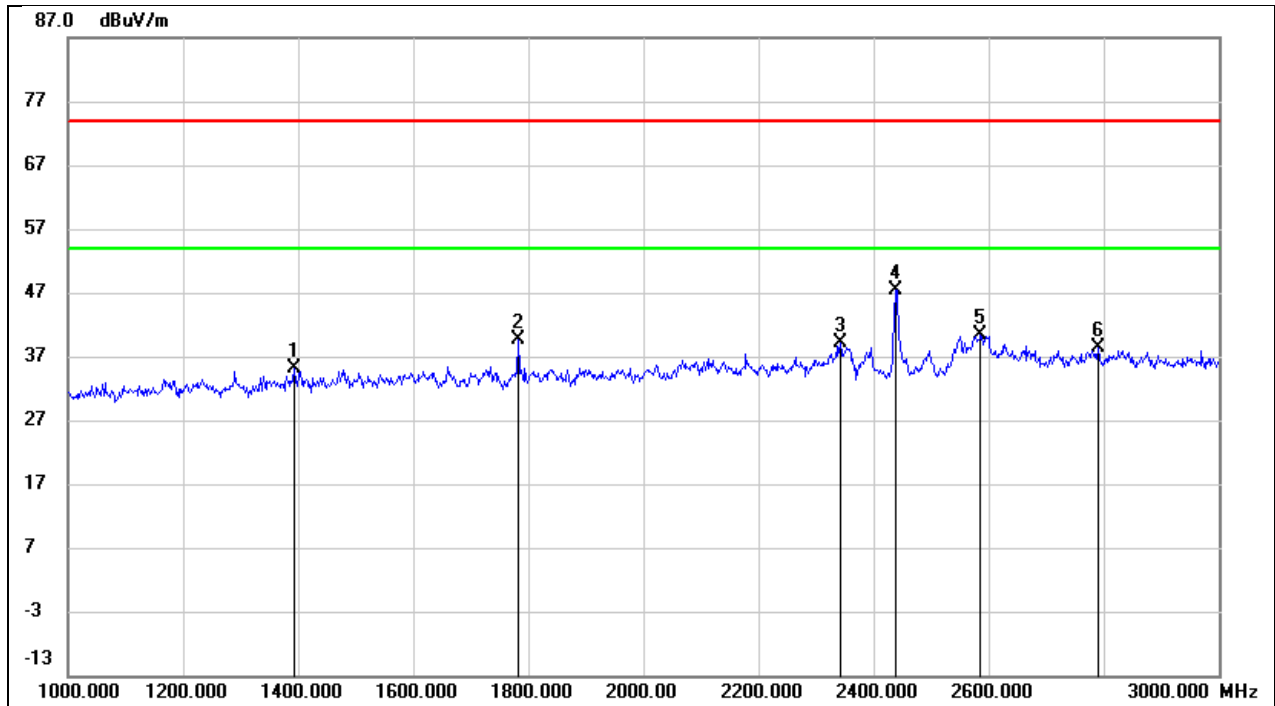


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1394.000	48.42	-13.20	35.22	74.00	-38.78	peak
2	1782.000	51.52	-11.78	39.74	74.00	-34.26	peak
3	2342.000	48.35	-9.30	39.05	74.00	-34.95	peak
4	2437.000	56.17	-8.80	47.37	/	/	Fundamental
5	2586.000	48.68	-8.24	40.44	74.00	-33.56	peak
6	2790.000	46.05	-7.62	38.43	74.00	-35.57	peak

Test Mode:	BT 8DPSK Mode 2441 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2437 MHz		
Polarity:	Vertical	Test Voltage:	DC 3.3 V

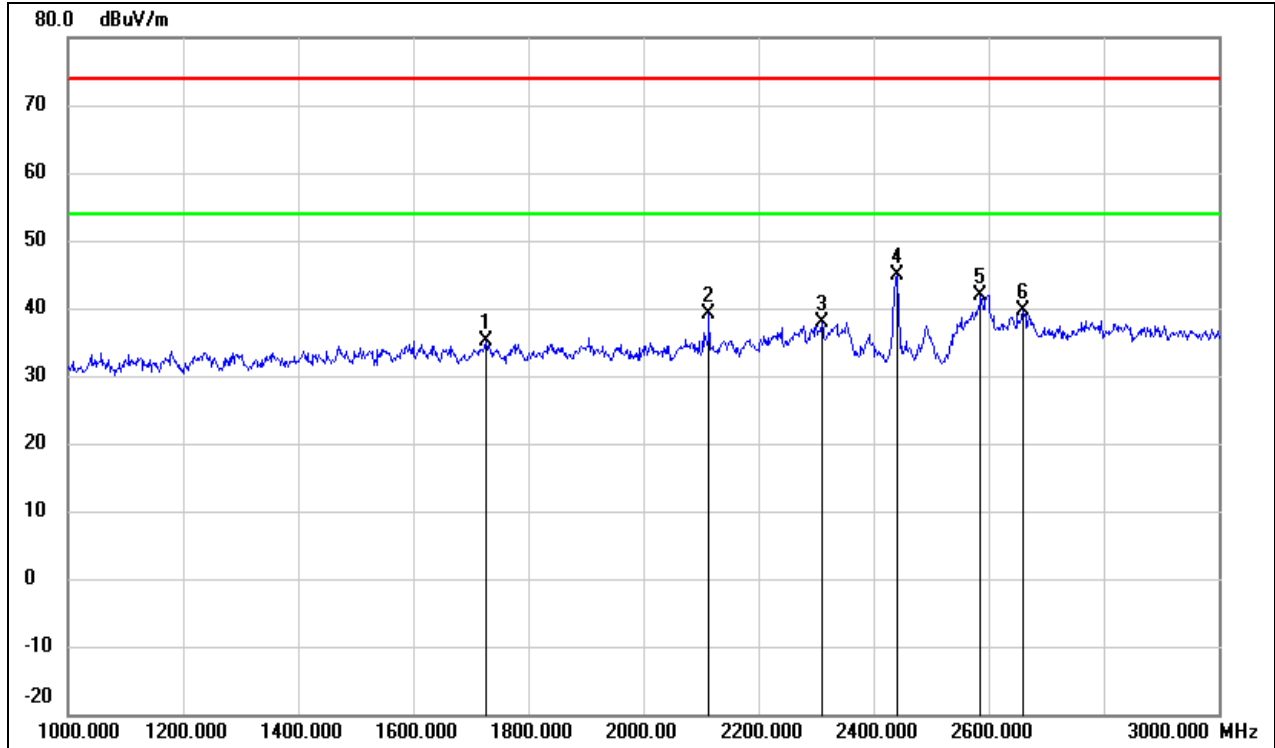


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1726.000	47.12	-11.97	35.15	74.00	-38.85	peak
2	2114.000	49.61	-10.47	39.14	74.00	-34.86	peak
3	2310.000	47.38	-9.46	37.92	74.00	-36.08	peak
4	2437.000	53.79	-8.80	44.99	/	/	Fundamental
5	2586.000	50.11	-8.24	41.87	74.00	-32.13	peak
6	2660.000	47.71	-8.01	39.70	74.00	-34.30	peak

Test Mode:	BT 8DPSK Mode 2441 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2437 MHz		
Polarity:	Horizontal	Test Voltage:	DC 3.3 V

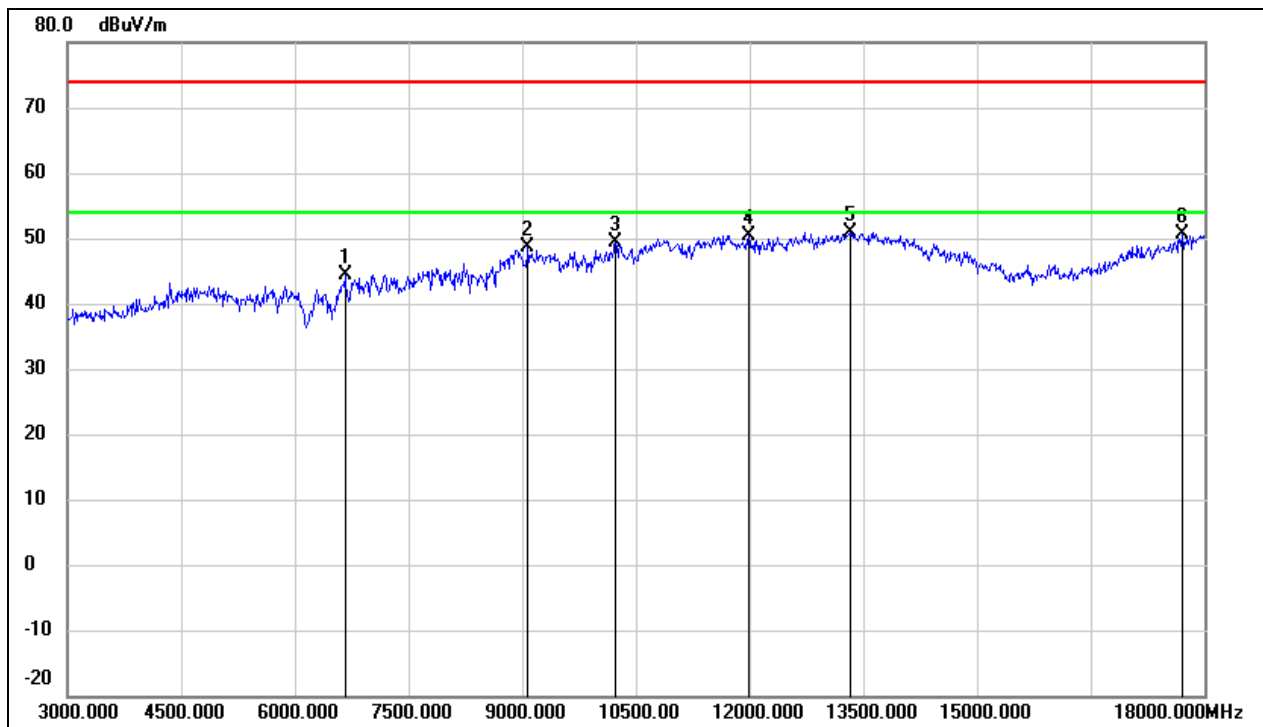

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6660.000	39.41	5.02	44.43	74.00	-29.57	peak
2	9075.000	38.04	10.52	48.56	74.00	-25.44	peak
3	10230.000	37.01	12.46	49.47	74.00	-24.53	peak
4	11985.000	32.50	17.92	50.42	74.00	-23.58	peak
5	13335.000	30.67	20.18	50.85	74.00	-23.15	peak
6	17715.000	26.70	24.00	50.70	74.00	-23.30	peak

Test Mode:	BT 8DPSK Mode 2441 MHz & WIFI 2.4GHz 802.11ax HE20 Mode 2437 MHz		
Polarity:	Vertical	Test Voltage:	DC 3.3 V

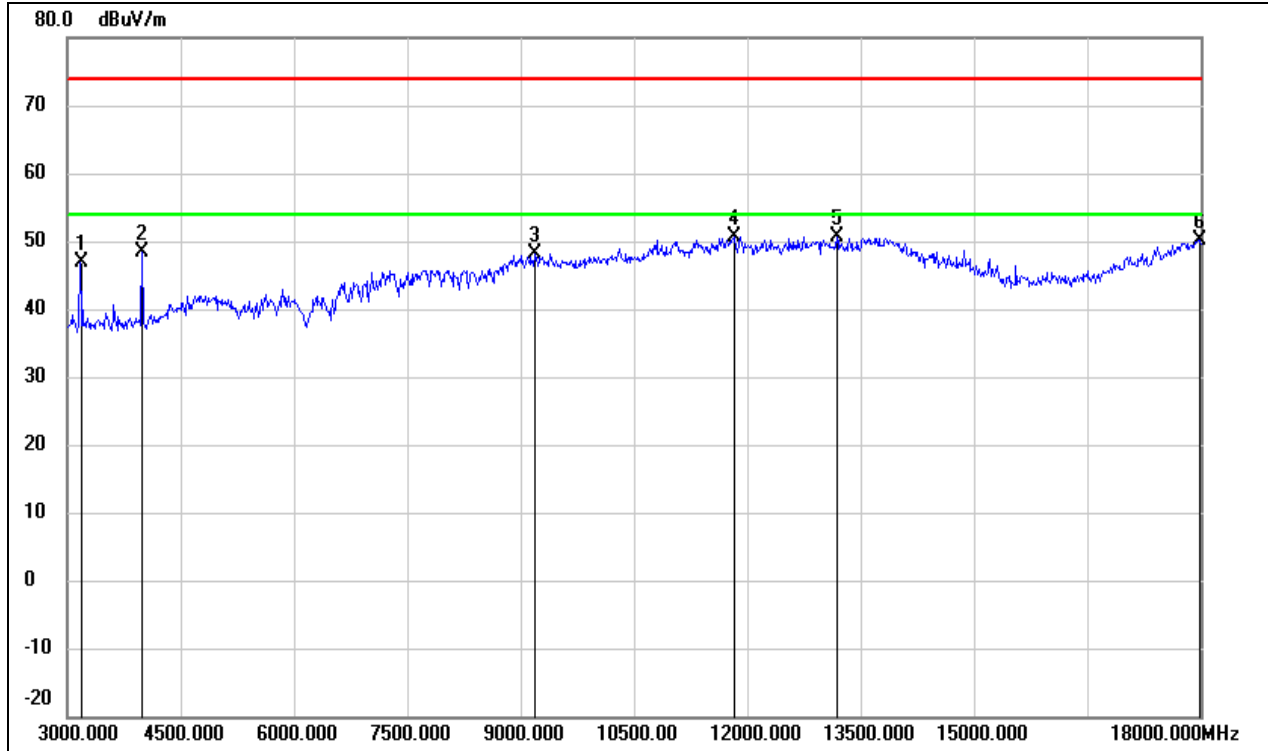

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3195.000	52.10	-5.13	46.97	74.00	-27.03	peak
2	3990.000	52.26	-3.82	48.44	74.00	-25.56	peak
3	9180.000	37.63	10.56	48.19	74.00	-25.81	peak
4	11820.000	33.12	17.47	50.59	74.00	-23.41	peak
5	13185.000	31.10	19.53	50.63	74.00	-23.37	peak
6	17985.000	24.53	25.60	50.13	74.00	-23.87	peak

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

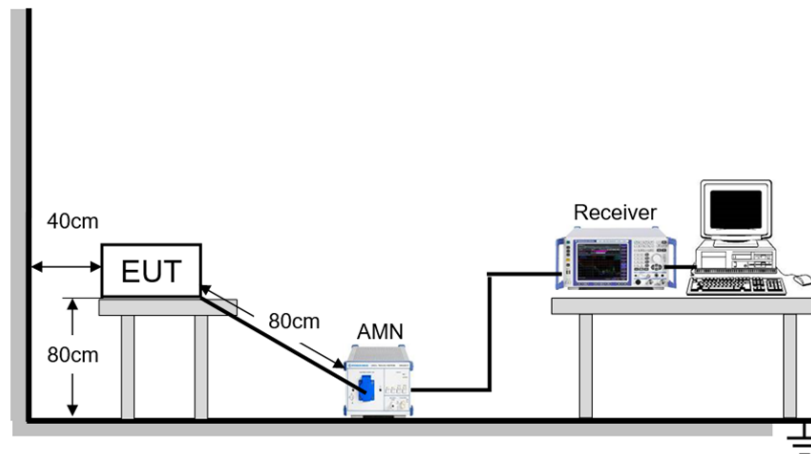


TEST ENVIRONMENT

Temperature	22.5 °C	Relative Humidity	56%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

TEST RESULTS

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Line	L	Test Voltage	AC 120 V, 60 Hz

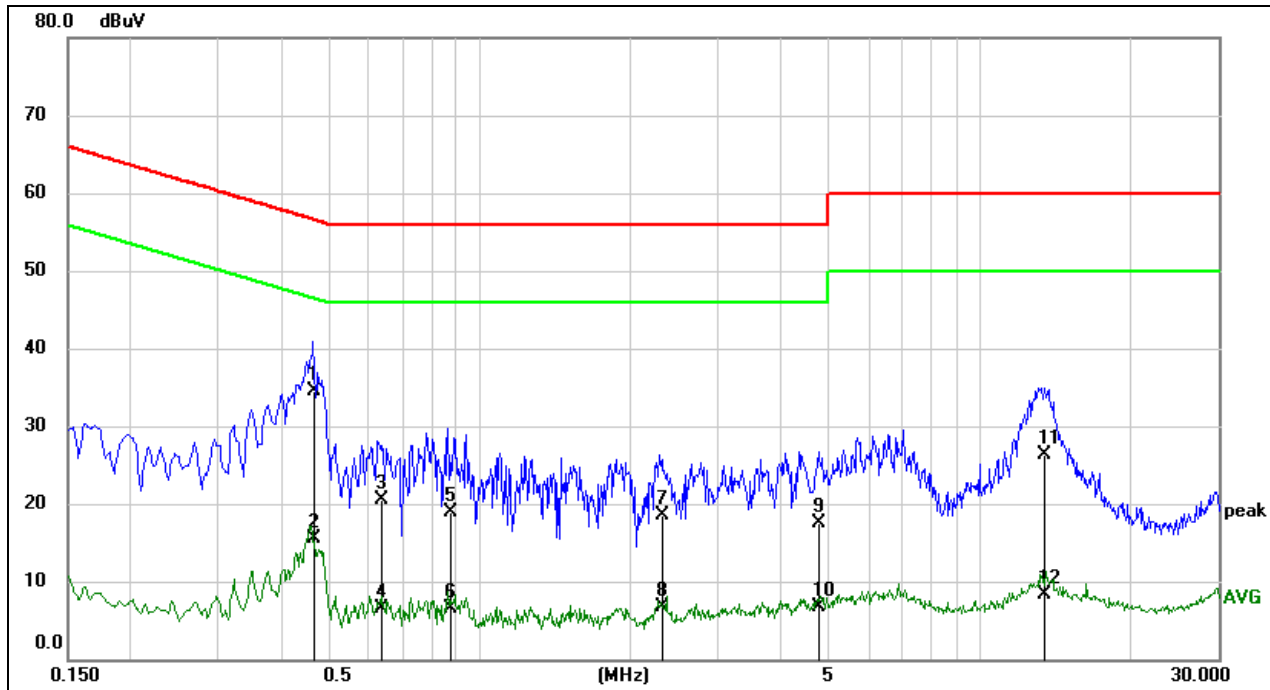


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4661	24.85	9.60	34.45	56.58	-22.13	QP
2	0.4661	5.86	9.60	15.46	46.58	-31.12	AVG
3	0.6397	10.99	9.60	20.59	56.00	-35.41	QP
4	0.6397	-3.14	9.60	6.46	46.00	-39.54	AVG
5	0.8702	9.30	9.60	18.90	56.00	-37.10	QP
6	0.8702	-3.03	9.60	6.57	46.00	-39.43	AVG
7	2.3010	8.83	9.64	18.47	56.00	-37.53	QP
8	2.3010	-2.99	9.64	6.65	46.00	-39.35	AVG
9	4.7859	7.72	9.71	17.43	56.00	-38.57	QP
10	4.7859	-2.98	9.71	6.73	46.00	-39.27	AVG
11	13.4331	16.51	9.76	26.27	60.00	-33.73	QP
12	13.4331	-1.52	9.76	8.24	50.00	-41.76	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Line	N	Test Voltage	AC 120 V, 60 Hz

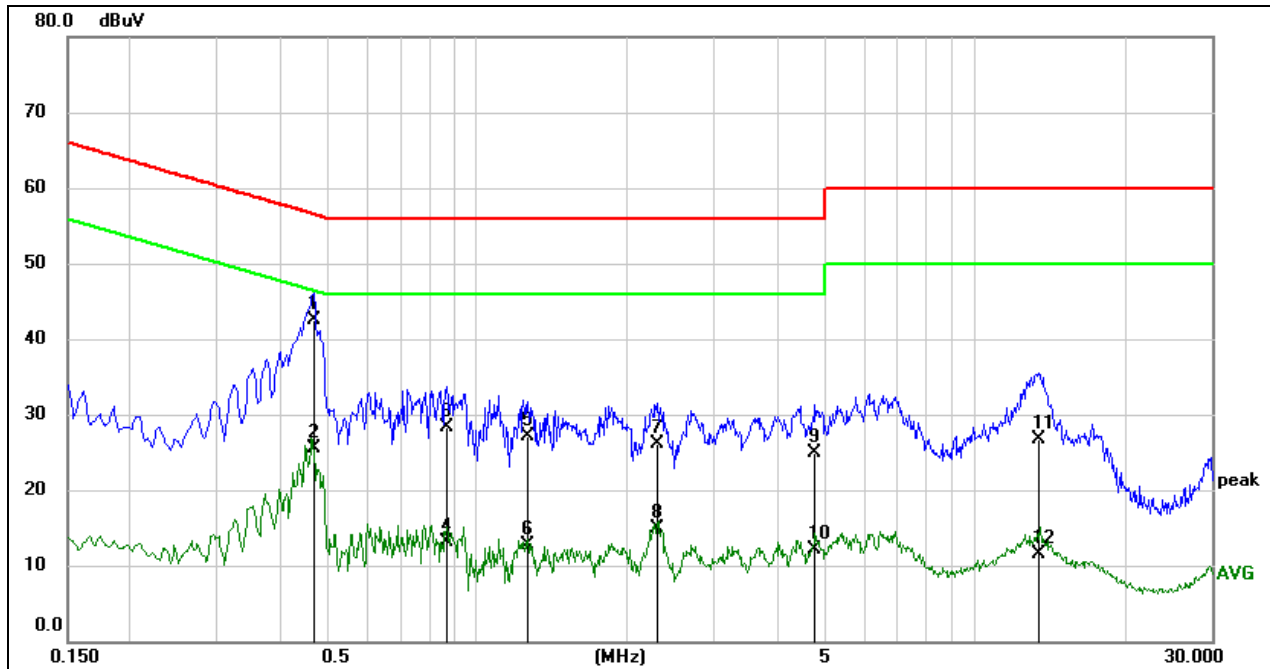

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4671	32.97	9.60	42.57	56.57	-14.00	QP
2	0.4671	15.90	9.60	25.50	46.57	-21.07	AVG
3	0.8713	18.79	9.60	28.39	56.00	-27.61	QP
4	0.8713	3.43	9.60	13.03	46.00	-32.97	AVG
5	1.2686	17.44	9.61	27.05	56.00	-28.95	QP
6	1.2686	3.10	9.61	12.71	46.00	-33.29	AVG
7	2.3023	16.45	9.64	26.09	56.00	-29.91	QP
8	2.3023	5.33	9.64	14.97	46.00	-31.03	AVG
9	4.8072	15.13	9.71	24.84	56.00	-31.16	QP
10	4.8072	2.30	9.71	12.01	46.00	-33.99	AVG
11	13.4262	16.95	9.76	26.71	60.00	-33.29	QP
12	13.4262	1.77	9.76	11.53	50.00	-38.47	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A1: EMISSION BANDWIDTH


11.1.1. Test Result


Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	20.40	5169.72	5190.12	PASS
	Ant2	5180	20.60	5169.72	5190.32	PASS
	Ant1	5200	20.68	5189.64	5210.32	PASS
	Ant2	5200	20.80	5189.60	5210.40	PASS
	Ant1	5240	20.64	5229.60	5250.24	PASS
	Ant2	5240	20.40	5229.68	5250.08	PASS
	Ant1	5260	20.48	5249.60	5270.08	PASS
	Ant2	5260	20.04	5250.08	5270.12	PASS
	Ant1	5280	20.52	5269.72	5290.24	PASS
	Ant2	5280	20.92	5269.48	5290.40	PASS
	Ant1	5320	20.40	5309.68	5330.08	PASS
	Ant2	5320	20.56	5309.64	5330.20	PASS
	Ant1	5500	20.20	5489.76	5509.96	PASS
	Ant2	5500	20.72	5489.72	5510.44	PASS
	Ant1	5580	20.20	5569.92	5590.12	PASS
	Ant2	5580	20.32	5569.88	5590.20	PASS
	Ant1	5700	20.72	5689.76	5710.48	PASS
	Ant2	5700	20.44	5689.76	5710.20	PASS
	Ant1	5720	20.76	5709.68	5730.44	PASS
	Ant2	5720	20.60	5709.84	5730.44	PASS
	Ant1	5720 UNII-2C	15.32	5709.68	5725	PASS
	Ant2	5720 UNII-2C	15.16	5709.84	5725	PASS
	Ant1	5720 UNII-3	5.44	5725	5730.44	PASS
	Ant2	5720 UNII-3	5.44	5725	5730.44	PASS
	Ant1	5745	20.08	5734.96	5755.04	PASS
	Ant2	5745	20.44	5734.72	5755.16	PASS
	Ant1	5785	20.44	5774.72	5795.16	PASS
	Ant2	5785	20.64	5774.84	5795.48	PASS
	Ant1	5825	20.48	5814.64	5835.12	PASS
	Ant2	5825	20.40	5814.84	5835.24	PASS
11N20MIMO	Ant1	5180	20.84	5169.64	5190.48	PASS
	Ant2	5180	20.76	5169.56	5190.32	PASS
	Ant1	5200	20.88	5189.68	5210.56	PASS
	Ant2	5200	20.40	5189.92	5210.32	PASS
	Ant1	5240	21.12	5229.48	5250.60	PASS
	Ant2	5240	20.56	5229.72	5250.28	PASS
	Ant1	5260	20.88	5249.24	5270.12	PASS
	Ant2	5260	20.44	5249.84	5270.28	PASS
	Ant1	5280	20.84	5269.56	5290.40	PASS
	Ant2	5280	20.36	5269.88	5290.24	PASS
	Ant1	5320	20.88	5309.52	5330.40	PASS
	Ant2	5320	20.64	5309.68	5330.32	PASS
	Ant1	5500	20.76	5489.88	5510.64	PASS
	Ant2	5500	21.00	5489.68	5510.68	PASS
	Ant1	5580	20.76	5569.56	5590.32	PASS
	Ant2	5580	20.48	5569.84	5590.32	PASS
	Ant1	5700	20.88	5689.40	5710.28	PASS
	Ant2	5700	20.52	5689.64	5710.16	PASS
	Ant1	5720	20.84	5709.48	5730.32	PASS
	Ant2	5720	20.84	5709.48	5730.32	PASS
	Ant1	5720 UNII-2C	15.52	5709.48	5725	PASS
	Ant2	5720 UNII-2C	15.52	5709.48	5725	PASS
	Ant1	5720 UNII-3	5.32	5725	5730.32	PASS
	Ant2	5720 UNII-3	5.32	5725	5730.32	PASS
	Ant1	5745	20.84	5734.56	5755.40	PASS
	Ant2	5745	20.40	5734.84	5755.24	PASS

	Ant1	5785	20.80	5774.68	5795.48	PASS
	Ant2	5785	20.48	5774.76	5795.24	PASS
	Ant1	5825	20.40	5814.76	5835.16	PASS
	Ant2	5825	20.68	5814.64	5835.32	PASS
11N40MIMO	Ant1	5190	40.64	5169.76	5210.40	PASS
	Ant2	5190	39.92	5170.16	5210.08	PASS
	Ant1	5230	45.20	5205.12	5250.32	PASS
	Ant2	5230	41.28	5208.96	5250.24	PASS
	Ant1	5270	40.48	5249.76	5290.24	PASS
	Ant2	5270	40.88	5249.20	5290.08	PASS
	Ant1	5310	40.32	5289.92	5330.24	PASS
	Ant2	5310	40.00	5290.08	5330.08	PASS
	Ant1	5510	40.80	5489.68	5530.48	PASS
	Ant2	5510	40.08	5490.00	5530.08	PASS
	Ant1	5550	40.72	5529.84	5570.56	PASS
	Ant2	5550	39.92	5530.16	5570.08	PASS
	Ant1	5670	40.40	5649.92	5690.32	PASS
	Ant2	5670	40.00	5650.08	5690.08	PASS
	Ant1	5710	40.48	5689.84	5730.32	PASS
	Ant2	5710	39.92	5690.08	5730.00	PASS
	Ant1	5710 UNII-2C	35.16	5689.84	5725	PASS
	Ant2	5710 UNII-2C	34.92	5690.08	5725	PASS
	Ant1	5710 UNII-3	5.32	5725	5730.32	PASS
	Ant2	5710 UNII-3	5	5725	5730.00	PASS
	Ant1	5755	40.56	5734.68	5775.24	PASS
	Ant2	5755	40.16	5734.92	5775.08	PASS
	Ant1	5795	40.40	5774.76	5815.16	PASS
	Ant2	5795	39.84	5775.08	5814.92	PASS
11AC80MIMO	Ant1	5210	82.08	5169.04	5251.12	PASS
	Ant2	5210	81.76	5169.36	5251.12	PASS
	Ant1	5290	82.88	5248.88	5331.76	PASS
	Ant2	5290	82.24	5249.20	5331.44	PASS
	Ant1	5530	82.56	5488.72	5571.28	PASS
	Ant2	5530	81.92	5489.20	5571.12	PASS
	Ant1	5610	82.56	5568.88	5651.44	PASS
	Ant2	5610	81.92	5569.20	5651.12	PASS
	Ant1	5690	82.88	5648.72	5731.60	PASS
	Ant2	5690	82.40	5648.88	5731.28	PASS
	Ant1	5690 UNII-2C	76.28	5648.72	5725	PASS
	Ant2	5690 UNII-2C	76.12	5648.88	5725	PASS
	Ant1	5690 UNII-3	6.6	5725	5731.60	PASS
	Ant2	5690 UNII-3	6.28	5725	5731.28	PASS
	Ant1	5775	82.56	5733.72	5816.28	PASS
	Ant2	5775	82.56	5733.88	5816.44	PASS
11AX20MIMO	Ant1	5180	21.64	5169.24	5190.88	PASS
	Ant2	5180	21.16	5169.52	5190.68	PASS
	Ant1	5200	21.36	5189.36	5210.72	PASS
	Ant2	5200	21.28	5189.52	5210.80	PASS
	Ant1	5240	21.68	5229.08	5250.76	PASS
	Ant2	5240	21.48	5229.16	5250.64	PASS
	Ant1	5260	21.60	5249.12	5270.72	PASS
	Ant2	5260	21.28	5249.32	5270.60	PASS
	Ant1	5280	21.36	5269.32	5290.68	PASS
	Ant2	5280	21.64	5269.32	5290.96	PASS
	Ant1	5320	21.24	5309.32	5330.56	PASS
	Ant2	5320	21.24	5309.52	5330.76	PASS
	Ant1	5500	21.12	5489.44	5510.56	PASS
	Ant2	5500	21.40	5489.32	5510.72	PASS
	Ant1	5580	21.28	5569.36	5590.64	PASS
	Ant2	5580	21.24	5569.44	5590.68	PASS
	Ant1	5700	21.40	5689.28	5710.68	PASS
	Ant2	5700	21.16	5689.44	5710.60	PASS
	Ant1	5720	21.36	5709.32	5730.68	PASS
	Ant2	5720	21.64	5709.44	5731.08	PASS


	Ant1	5720 UNII-2C	15.68	5709.32	5725	PASS
	Ant2	5720 UNII-2C	15.56	5709.44	5725	PASS
	Ant1	5720 UNII-3	5.68	5725	5730.68	PASS
	Ant2	5720 UNII-3	6.08	5725	5731.08	PASS
	Ant1	5745	21.20	5734.36	5755.56	PASS
	Ant2	5745	21.08	5734.56	5755.64	PASS
	Ant1	5785	21.32	5774.32	5795.64	PASS
	Ant2	5785	21.08	5774.40	5795.48	PASS
	Ant1	5825	21.28	5814.32	5835.60	PASS
	Ant2	5825	21.40	5814.32	5835.72	PASS
11AX40MIMO	Ant1	5190	40.32	5170.00	5210.32	PASS
	Ant2	5190	40.16	5169.92	5210.08	PASS
	Ant1	5230	40.24	5209.92	5250.16	PASS
	Ant2	5230	40.16	5209.92	5250.08	PASS
	Ant1	5270	40.08	5249.92	5290.00	PASS
	Ant2	5270	40.32	5250.00	5290.32	PASS
	Ant1	5310	40.32	5289.92	5330.24	PASS
	Ant2	5310	40.24	5290.00	5330.24	PASS
	Ant1	5510	40.32	5489.92	5530.24	PASS
	Ant2	5510	40.16	5490.00	5530.16	PASS
	Ant1	5550	40.32	5529.84	5570.16	PASS
	Ant2	5550	40.24	5529.92	5570.16	PASS
	Ant1	5670	40.16	5649.84	5690.00	PASS
	Ant2	5670	40.32	5650.00	5690.32	PASS
	Ant1	5710	40.24	5689.84	5730.08	PASS
	Ant2	5710	40.32	5689.92	5730.24	PASS
	Ant1	5710 UNII-2C	35.16	5689.84	5725	PASS
	Ant2	5710 UNII-2C	35.08	5689.92	5725	PASS
	Ant1	5710 UNII-3	5.08	5725	5730.08	PASS
	Ant2	5710 UNII-3	5.24	5725	5730.24	PASS
	Ant1	5755	40.32	5734.76	5775.08	PASS
	Ant2	5755	40.40	5734.84	5775.24	PASS
	Ant1	5795	40.24	5774.84	5815.08	PASS
	Ant2	5795	40.24	5774.92	5815.16	PASS
11AX80MIMO	Ant1	5210	81.60	5169.36	5250.96	PASS
	Ant2	5210	81.76	5169.36	5251.12	PASS
	Ant1	5290	81.44	5249.52	5330.96	PASS
	Ant2	5290	82.08	5249.36	5331.44	PASS
	Ant1	5530	81.76	5489.20	5570.96	PASS
	Ant2	5530	82.24	5488.88	5571.12	PASS
	Ant1	5610	81.76	5569.36	5651.12	PASS
	Ant2	5610	82.24	5569.04	5651.28	PASS
	Ant1	5690	81.92	5649.20	5731.12	PASS
	Ant2	5690	82.40	5649.04	5731.44	PASS
	Ant1	5690 UNII-2C	75.8	5649.20	5725	PASS
	Ant2	5690 UNII-2C	75.96	5649.04	5725	PASS
	Ant1	5690 UNII-3	6.12	5725	5731.12	PASS
	Ant2	5690 UNII-3	6.44	5725	5731.44	PASS
	Ant1	5775	82.56	5734.04	5816.60	PASS
	Ant2	5775	82.40	5734.04	5816.44	PASS

11.1.2. Test Graphs

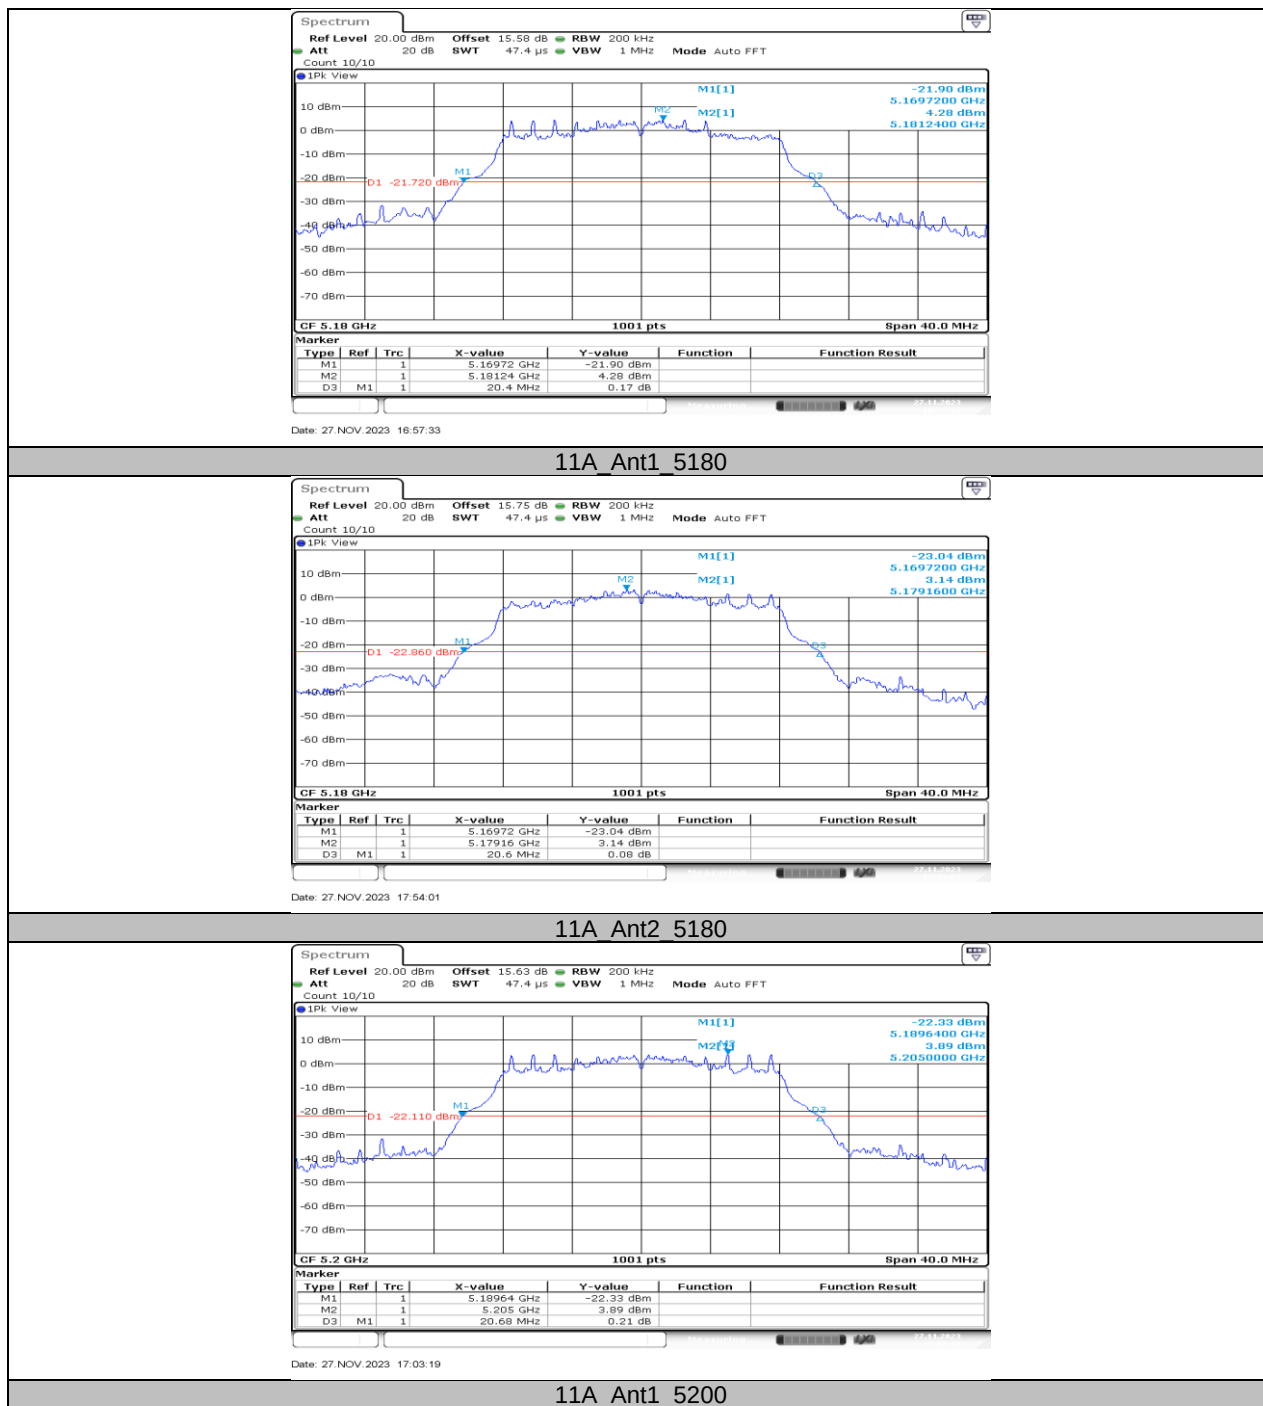


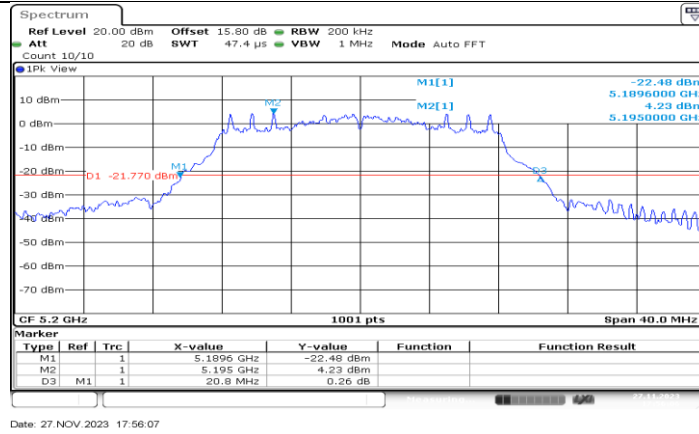


11A_Ant2_5200

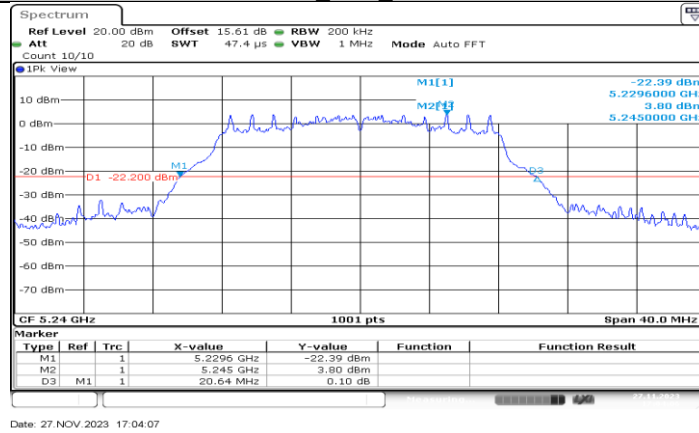


11A_Ant1_5240

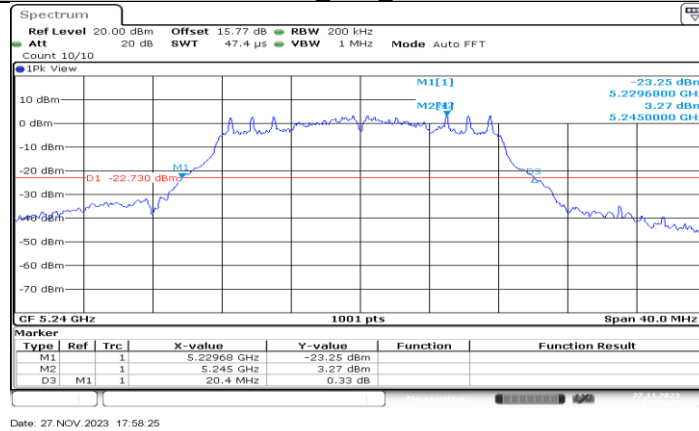

11A_Ant2_5240

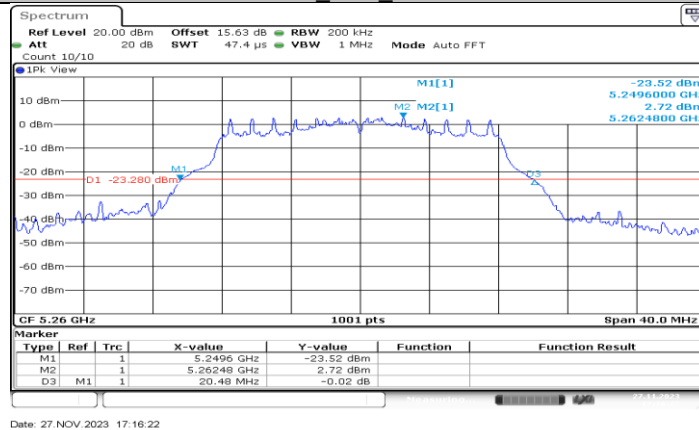


11A_Ant1_5260

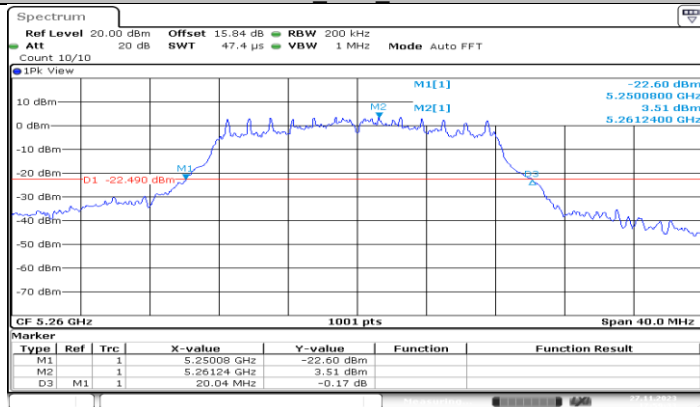


Date: 27 NOV 2023 17:59:34

11A_Ant2_5260

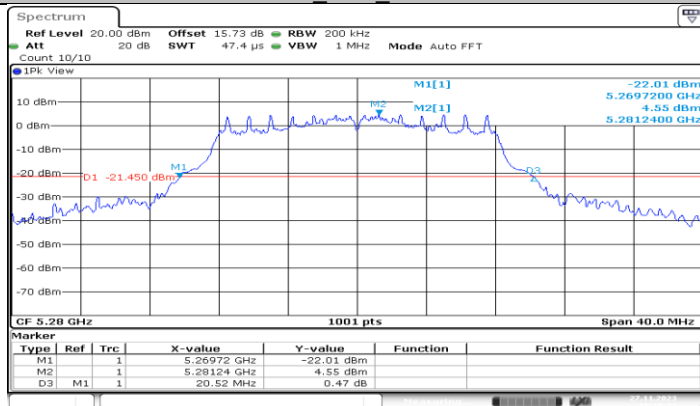


Date: 27 NOV 2023 17:18:52

11A_Ant1_5280

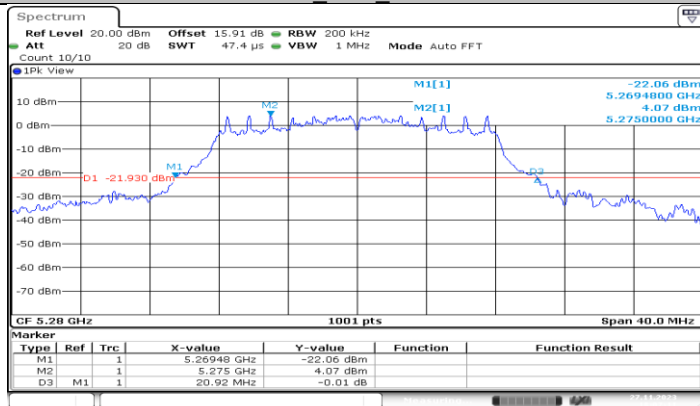


Date: 27 NOV 2023 18:07:11


11A_Ant2_5280

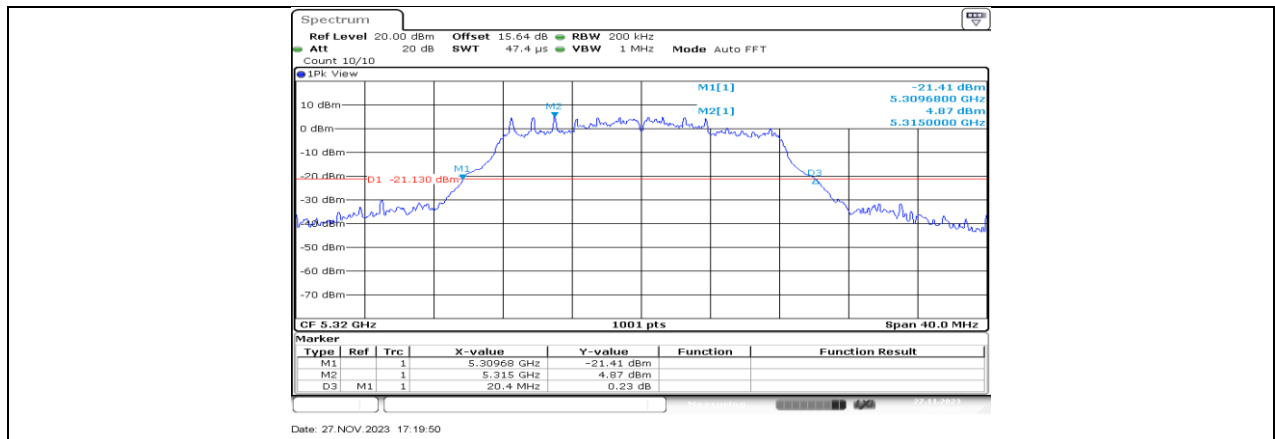

11A Ant1 5320

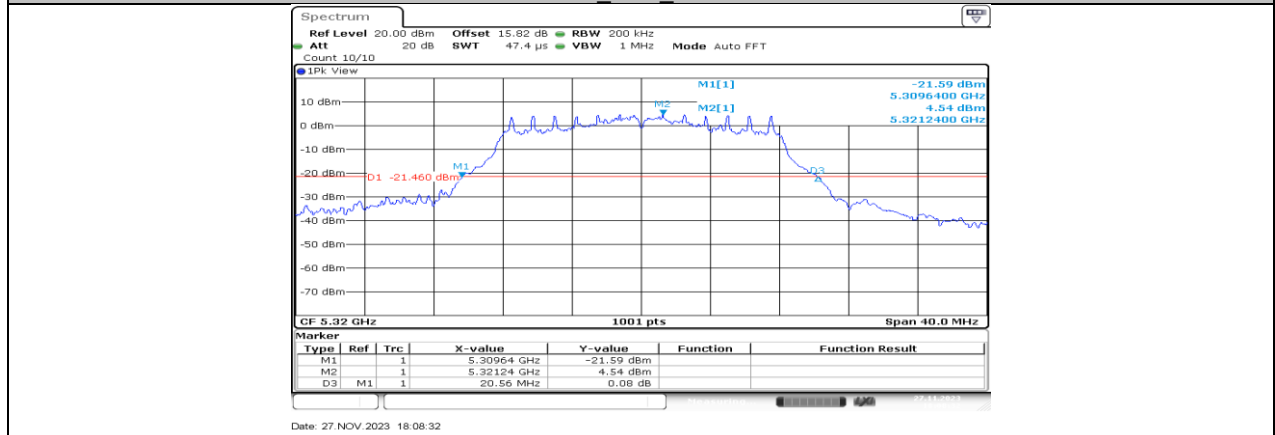

11A Ant2 5320

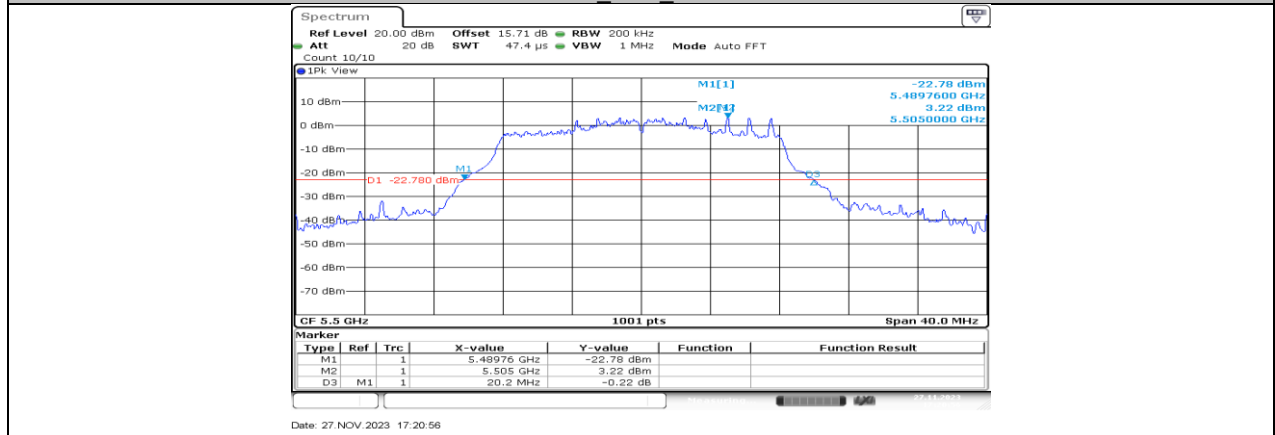

11A Ant1 5500

