



## 7.6. Spurious Emission, Band Edge and Restricted bands

### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

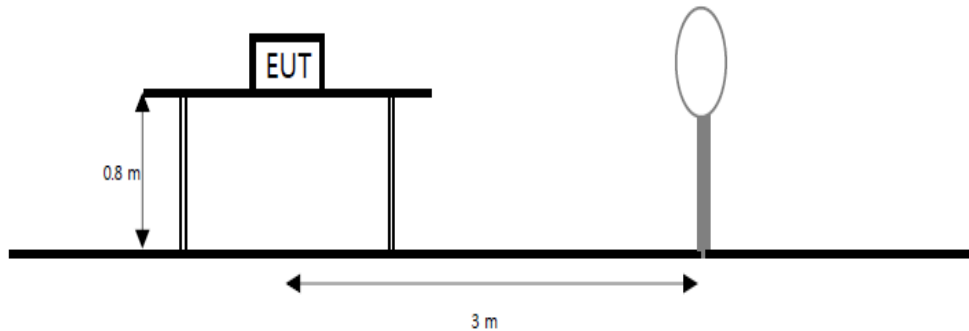

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

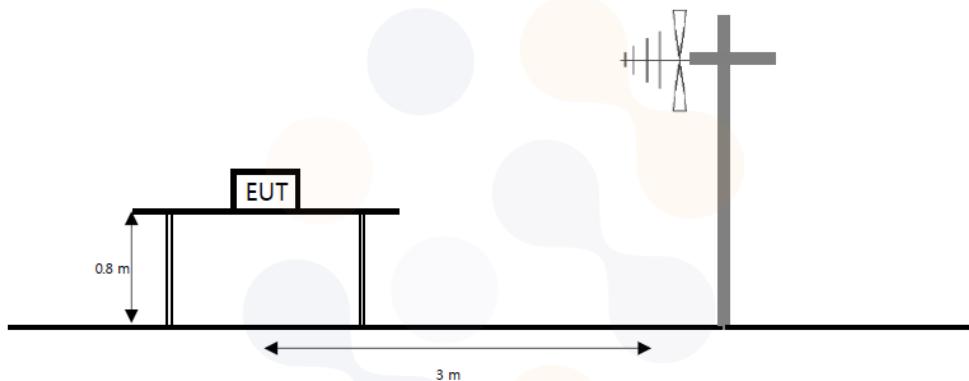

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

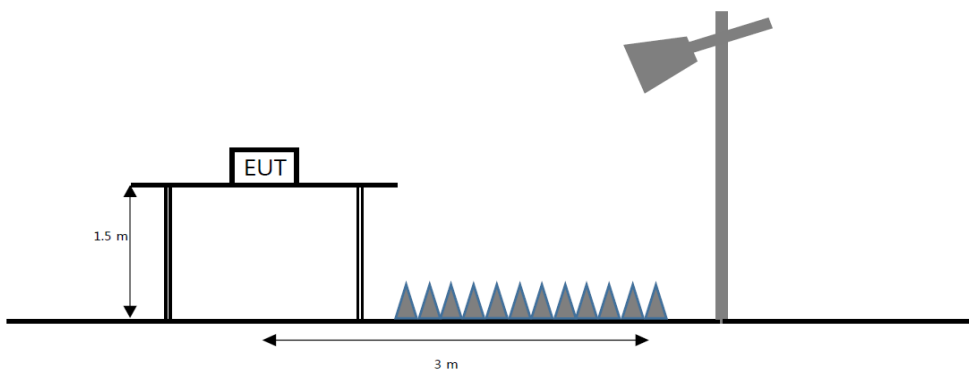

## Limit

### FCC

According to section 15.209(a) except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength ( $\mu V/m$ ) | Measurement distance (m) |
|-----------------|------------------------------|--------------------------|
| 0.009 - 0.490   | 2 400/F(kHz)                 | 300                      |
| 0.490 - 1.705   | 24 000/F(kHz)                | 30                       |
| 1.705 - 30      | 30                           | 30                       |
| 30 - 88         | 100**                        | 3                        |
| 88 - 216        | 150**                        | 3                        |
| 216 - 960       | 200**                        | 3                        |
| Above 960       | 500                          | 3                        |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b) only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                   | MHz                   | MHz               | GHz           |
|-----------------------|-----------------------|-------------------|---------------|
| 0.009 - 0.110         | 16.42 - 16.423        | 399.9 - 410       | 4.5 - 5.15    |
| 0.495 - 0.505         | 16.694 75 - 16.695 25 | 608 - 614         | 5.35 - 5.46   |
| 2.173 5 - 2.190 5     | 16.804 25 - 16.804 75 | 960 - 1 240       | 7.25 - 7.75   |
| 4.125 - 4.128         | 25.5 - 25.67          | 1 300 - 1 427     | 8.025 - 8.5   |
| 4.177 25 - 4.177 75   | 37.5 - 38.25          | 1 435 - 1 626.5   | 9.0 - 9.2     |
| 4.207 25 - 4.207 75   | 73 - 74.6             | 1 645.5 - 1 646.5 | 9.3 - 9.5     |
| 6.215 - 6.218         | 74.8 - 75.2           | 1 660 - 1 710     | 10.6 - 12.7   |
| 6.267 75 - 6.268 25   | 108 - 121.94          | 1 718.8 - 1 722.2 | 13.25 - 13.4  |
| 6.311 75 - 6.312 25   | 123 - 138             | 2 200 - 2 300     | 14.47 - 14.5  |
| 8.291 - 8.294         | 149.9 - 150.05        | 2 310 - 2 390     | 15.35 - 16.2  |
| 8.362 - 8.366         | 156.524 75 - 156.525  | 2 483.5 - 2 500   | 17.7 - 21.4   |
| 8.376 25 - 8.386 75   | 25                    | 2 690 - 2 900     | 22.01 - 23.12 |
| 8.414 25 - 8.414 75   | 156.7 - 156.9         | 3 260 - 3 267     | 23.6 - 24.0   |
| 12.29 - 12.293        | 162.012 5 - 167.17    | 3 332 - 3 339     | 31.2 - 31.8   |
| 12.519 75 - 12.520 25 | 167.72 - 173.2        | 3 345.8 - 3 358   | 36.43 - 36.5  |
| 12.576 75 - 12.577 25 | 240 - 285             | 3 600 - 4 400     | Above 38.6    |
| 13.36 - 13.41         | 322 - 335.4           |                   |               |

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

|                                                                                                                                                                                                                        |                                                                 |                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <p><b>Eurofins KCTL Co.,Ltd.</b><br/> 65, Sinwon-ro, Yeongtong-gu,<br/> Suwon-si, Gyeonggi-do, 16677, Korea<br/> TEL: 82-70-5008-1021 FAX: 82-505-299-8311<br/> <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p> | <p>Report No.:<br/> KR23-SRF0225-A<br/> Page (104) of (216)</p> |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------|

According to section 15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



## IC

According to RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5- General field strength limits at frequencies above 30 MHz**

| Frequency(MHz) | Field strength<br>( $\mu\text{V}/\text{m}$ at 3 m) |
|----------------|----------------------------------------------------|
| 30 to 88       | 100                                                |
| 88 to 216      | 150                                                |
| 216 to 960     | 200                                                |
| Above 960      | 500                                                |

**Table 6- General field strength limits at frequencies below 30 MHz**

| Frequency                 | Magnetic field strength (H-Field)<br>( $\mu\text{A}/\text{m}$ ) | Measurement<br>distance(m) |
|---------------------------|-----------------------------------------------------------------|----------------------------|
| 9 – 490 kHz <sup>1)</sup> | 6.37/F (F in kHz)                                               | 300                        |
| 490 – 1705 kHz            | 63.7/F (F in kHz)                                               | 30                         |
| 1.705 - 30 MHz            | 0.08                                                            | 30                         |

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

**Table 7- Restricted frequency bands\***

| MHz                 | MHz                   | GHz           |
|---------------------|-----------------------|---------------|
| 0.090 - 0.110       | 149.9 - 150.05        | 9.0 - 9.2     |
| 0.495 - 0.505       | 156.52475 - 156.52525 | 9.3 - 9.5     |
| 2.1735 - 2.1905     | 156.7 - 156.9         | 10.6 - 12.7   |
| 3.020 - 3.026       | 162.0125 - 167.17     | 13.25 - 13.4  |
| 4.125 - 4.128       | 167.72 - 173.2        | 14.47 - 14.5  |
| 4.17725 - 4.17775   | 240 - 285             | 15.35 - 16.2  |
| 4.20725 - 4.20775   | 322 - 335.4           | 17.7 - 21.4   |
| 5.677 - 5.683       | 399.9 - 410           | 22.01 - 23.12 |
| 6.215 - 6.218       | 608 - 614             | 23.6 - 24.0   |
| 6.26775 - 6.26825   | 960 - 1427            | 31.2 - 31.8   |
| 6.31175 - 6.31225   | 1435 - 1626.5         | 36.43 - 36.5  |
| 8.291 - 8.294       | 1645.5 - 1646.5       | Above 38.6    |
| 8.362 - 8.366       | 1660 - 1710           |               |
| 8.37625 - 8.38675   | 1718.8 - 1722.2       |               |
| 8.41425 - 8.41475   | 2200 - 2300           |               |
| 12.29 - 12.293      | 2310 - 2390           |               |
| 12.51975 - 12.52025 | 2483.5 - 2500         |               |
| 12.57675 - 12.57725 | 2655 - 2900           |               |
| 13.36 - 13.41       | 3260 - 3267           |               |
| 16.42 - 16.423      | 3332 - 3339           |               |
| 16.69475 - 16.69525 | 3345.8 - 3358         |               |
| 16.80425 - 16.80475 | 3500 - 4400           |               |
| 25.5 - 25.67        | 4500 - 5150           |               |
| 37.5 - 38.25        | 5350 - 5460           |               |
| 73 - 74.6           | 7250 - 7750           |               |
| 74.8 - 75.2         | 8025 - 8500           |               |
| 108 - 138           | --                    |               |

\* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

### **Test procedure**

ANSI C63.10-2013 Section 12.7.7.2, 12.7.5, 12.7.6  
 KDB 789033 D02 v02r01 – Section G

### **Test settings**

#### **Peak field strength measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW  $\geq$  (3 $\times$ RBW)
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

**Table. RBW as a function of frequency**

| Frequency           | RBW                |
|---------------------|--------------------|
| 9 kHz to 150 kHz    | 200 Hz to 300 Hz   |
| 0.15 MHz to 30 MHz  | 9 kHz to 10 kHz    |
| 30 MHz to 1 000 MHz | 100 kHz to 120 kHz |
| > 1 000 MHz         | 1 MHz              |

## Average field strength measurements

### Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ( $D \geq 98\%$ ), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW  $\geq (3 \times \text{RBW})$ .
3. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

### Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and the duty cycle is constant (duty cycle variations are less than  $\pm 2\%$ ), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
6. Averaging type = power (i.e., rms):
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $D \geq 98\%$ ) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

## Band edge measurements

### Integration Method

For maximum emissions measurements, follow the procedures described in II.G.5., “Procedures for unwanted maximum Emissions Measurements above 1000 MHz. Except for the following changes:

1. Set RBW = 100 kHz
2. Set VBW  $\geq 3 \times$  RBW
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured. CAUTION: you must ensure that the spectrum analyzer or EMI receiver is set for peak detection and max-hold for this measurement.

For average emissions measurements, follow the procedures described in II.G.6., “Procedures for average unwanted Emissions Measurements above 1000 MHz. Except for the following changes:

1. Set RBW = 100 kHz
2. Set VBW  $\geq 3 \times$  RBW
3. Perform a band-power integration across the 1 MHz bandwidth in which the band edge emission level is to be measured.

### Notes:

1.  $f < 30$  MHz, extrapolation factor of 40 dB/decade of distance.  $F_d = 40\log(D_m/D_s)$   
 $f \geq 30$  MHz, extrapolation factor of 20 dB/decade of distance.  $F_d = 20\log(D_m/D_s)$

Where:

$F_d$  = Distance factor in dB


$D_m$  = Measurement distance in meters

$D_s$  = Specification distance in meters

2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or  $F_d$ (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. <sup>1)</sup> means restricted band.
6. Above 1 GHz the worst results between two antenna polarizations (H and V) were documented in the test report.
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: “No spurious emissions were detected within 20 dB of the limit.”
8. For above 1 GHz pre-scan to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.
9. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBμV/m, which is equivalent to  $Y - 51.5 = Z$  dBμA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.


**Test results (Below 30 MHz) – Worst case: 802.11a 2TX MIMO / UNII-2C\_5 500 MHz**

| Frequency                                                      | Pol.  | Reading        | Ant. Factor | Amp.+Cable | DCF  | Result           | Limit            | Margin |
|----------------------------------------------------------------|-------|----------------|-------------|------------|------|------------------|------------------|--------|
| (MHz)                                                          | (V/H) | (dB( $\mu$ V)) | (dB)        | (dB)       | (dB) | (dB( $\mu$ V/m)) | (dB( $\mu$ V/m)) | (dB)   |
| <b>Quasi peak data</b>                                         |       |                |             |            |      |                  |                  |        |
| No spurious emissions were detected within 20 dB of the limit. |       |                |             |            |      |                  |                  |        |

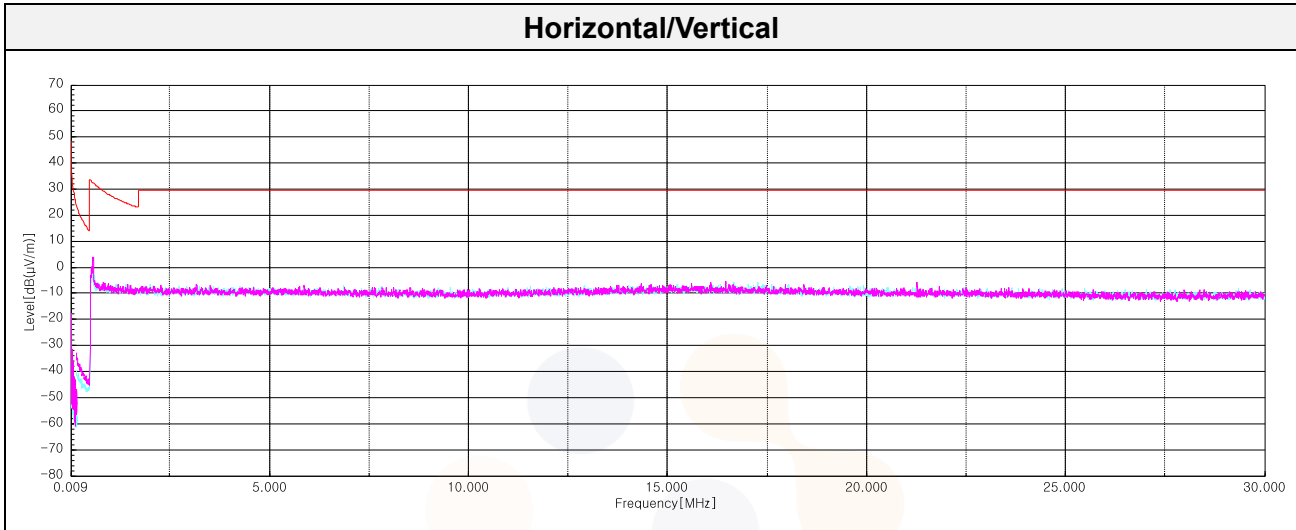

**Test results (Below 1 000 MHz) – Worst case: 802.11a 2TX MIMO / UNII-2C\_5 500 MHz**

| Frequency              | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                  | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Quasi peak data</b> |       |          |             |            |      |            |            |        |
| 39.94                  | V     | 29.90    | 19.03       | -31.90     | -    | 17.03      | 40.00      | 22.97  |
| 68.56                  | H     | 39.70    | 12.10       | -31.54     | -    | 20.26      | 40.00      | 19.74  |
| 99.96                  | V     | 34.90    | 16.49       | -31.41     | -    | 19.98      | 43.50      | 23.52  |
| 262.44 <sup>1)</sup>   | V     | 24.80    | 20.20       | -30.89     | -    | 14.11      | 46.00      | 31.89  |
| 442.61                 | V     | 25.10    | 22.43       | -30.59     | -    | 16.94      | 46.00      | 29.06  |
| 808.06                 | V     | 23.90    | 25.90       | -29.64     | -    | 20.16      | 46.00      | 25.84  |

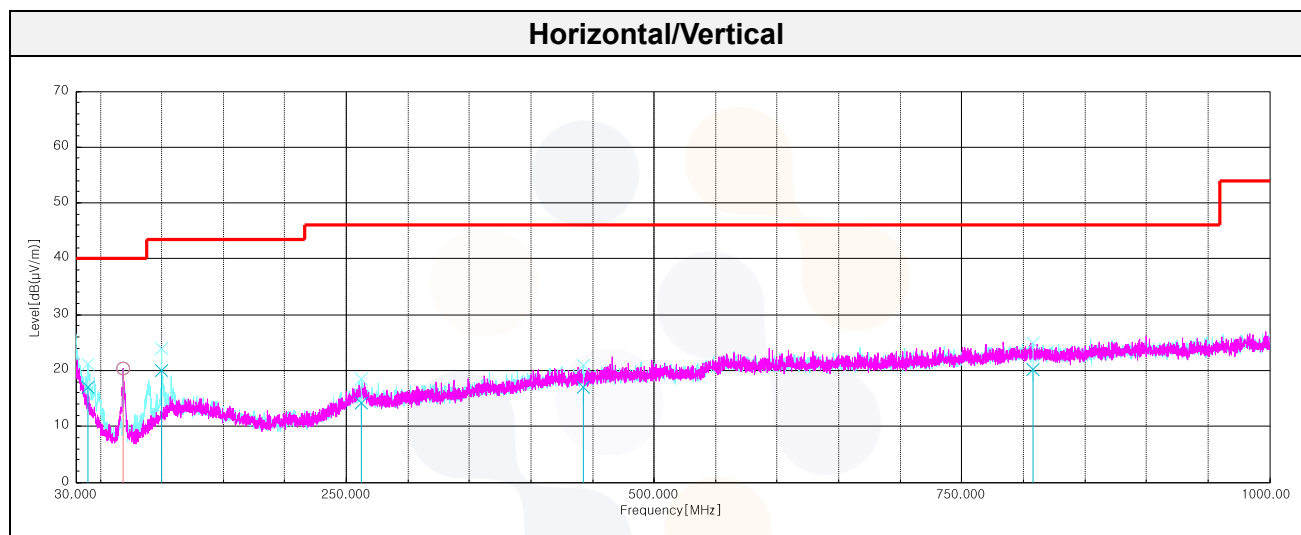

## Test results (Above 1 000 MHz)

### UNII-1 SISO

#### 802.11a\_Lowest Channel (5 180 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.12 <sup>1)</sup>  | H     | 58.70    | 33.30       | -27.42     | -    | 64.58      | 74.00      | 9.42   |
| 10 332.18               | V     | 54.80    | 38.94       | -43.85     | -    | 49.89      | 68.20      | 18.31  |
| 15 462.33 <sup>1)</sup> | H     | 52.60    | 38.35       | -41.57     | -    | 49.38      | 74.00      | 24.62  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.12 <sup>1)</sup>  | H     | 38.81    | 33.30       | -27.42     | 0.27 | 44.96      | 54.00      | 9.04   |

#### 802.11a\_Middle Channel (5 200 MHz)


| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 464.43                                                     | H     | 54.70    | 39.00       | -43.84     | -    | 49.86      | 68.20      | 18.34  |
| 15 632.53 <sup>1)</sup>                                       | H     | 53.20    | 37.87       | -41.53     | -    | 49.54      | 74.00      | 24.46  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

#### 802.11a\_Highest Channel (5 240 MHz)

| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 500.47                                                     | H     | 55.00    | 39.00       | -43.84     | -    | 50.16      | 68.20      | 18.04  |
| 15 770.53 <sup>1)</sup>                                       | H     | 54.20    | 38.10       | -41.49     | -    | 50.81      | 74.00      | 23.19  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |


**802.11a\_Lowest Channel (5 180 MHz)**

**Average data**

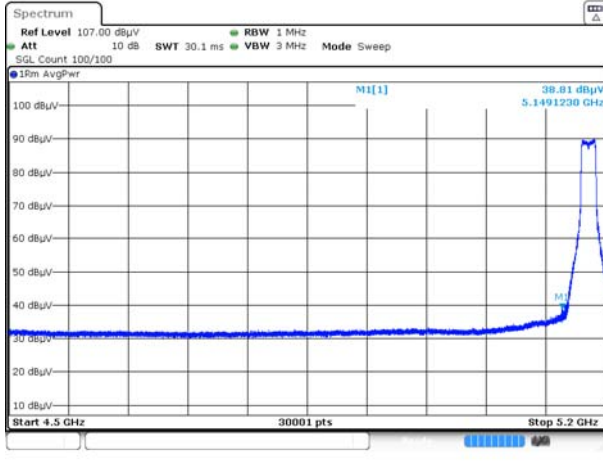

Blank

**Horizontal/Vertical for Band-edge**

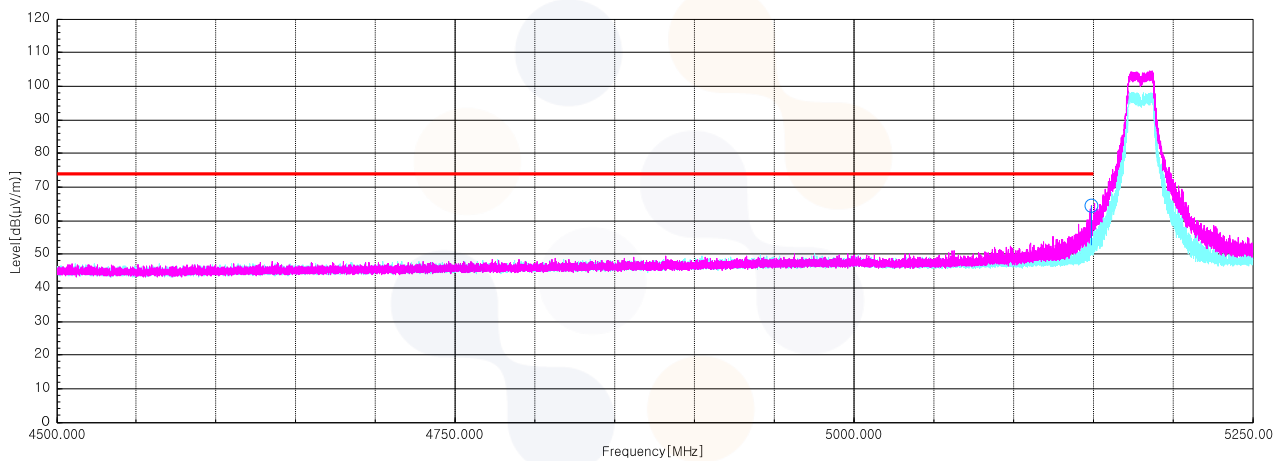

**802.11n\_HT20\_Lowest Channel (5 180 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.66 <sup>1)</sup>  | H     | 57.50    | 33.30       | -27.42     | -    | 63.38      | 74.00      | 10.62  |
| 10 368.98               | H     | 55.20    | 38.86       | -43.85     | -    | 50.21      | 68.20      | 17.99  |
| 15 466.55 <sup>1)</sup> | H     | 53.30    | 38.33       | -41.56     | -    | 50.07      | 74.00      | 23.93  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.66 <sup>1)</sup>  | H     | 39.29    | 33.30       | -27.42     | 0.32 | 45.49      | 54.00      | 8.51   |

**802.11n\_HT20\_Middle Channel (5 200 MHz)**


| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 384.70                                                     | V     | 55.30    | 38.83       | -43.84     | -    | 50.29      | 68.20      | 17.91  |
| 15 634.07 <sup>1)</sup>                                       | V     | 53.40    | 37.86       | -41.53     | -    | 49.73      | 74.00      | 24.27  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

**802.11n\_HT20\_Highest Channel (5 240 MHz)**

| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 459.83                                                     | V     | 54.80    | 39.00       | -43.84     | -    | 49.96      | 68.20      | 18.24  |
| 15 731.05 <sup>1)</sup>                                       | V     | 54.10    | 38.10       | -41.51     | -    | 50.69      | 74.00      | 23.31  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11n\_HT20\_Lowest Channel (5 180 MHz)**

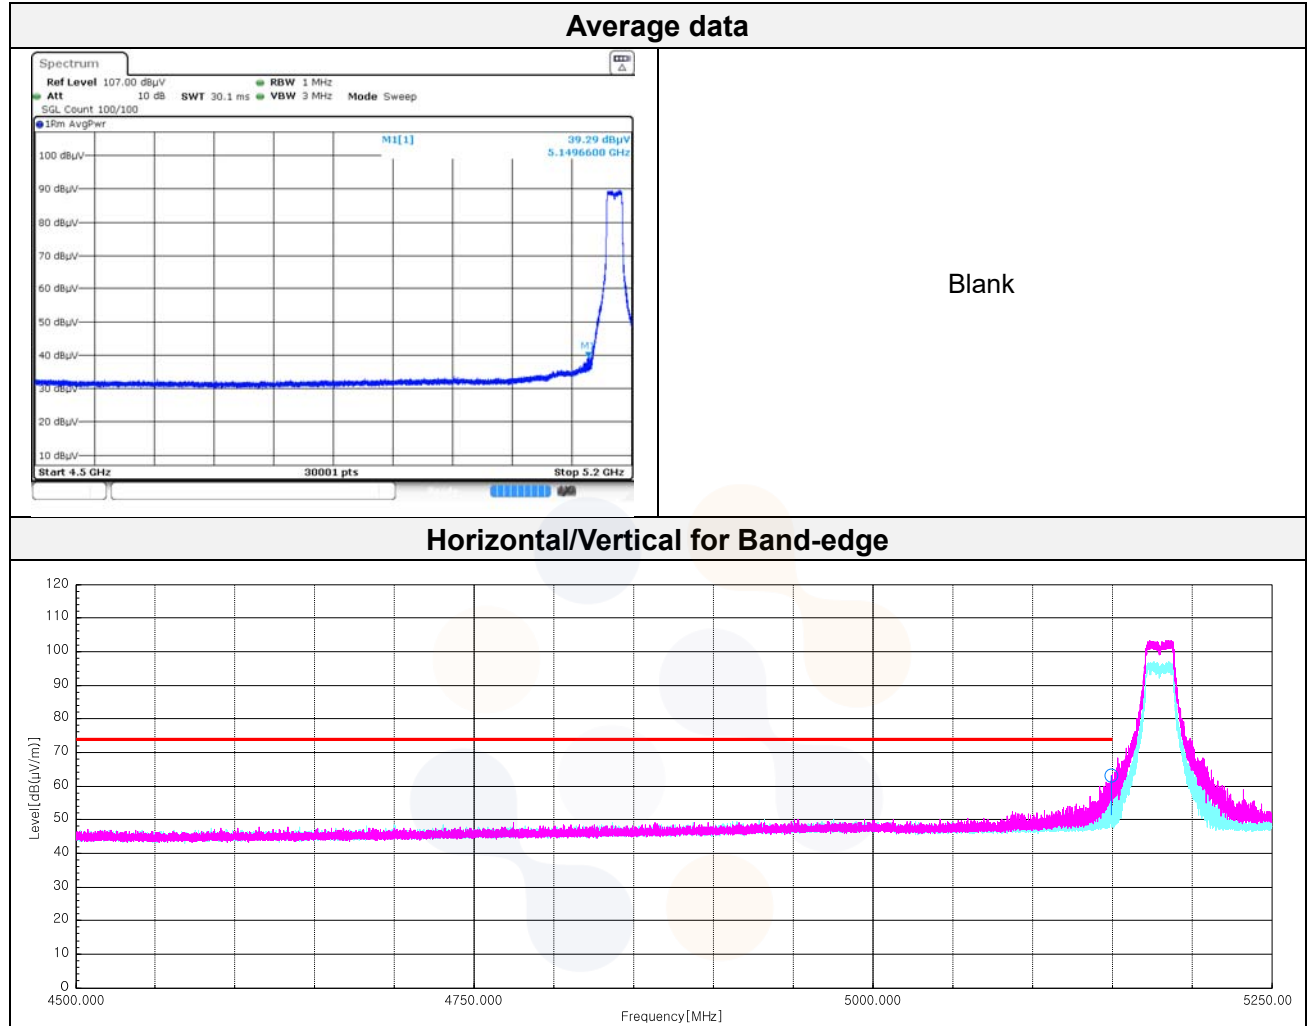

**802.11n\_HT40\_Lowest Channel (5 190 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 147.89 <sup>1)</sup>  | H     | 62.60    | 33.30       | -27.42     | -    | 68.48      | 74.00      | 5.52   |
| 10 430.32               | V     | 54.50    | 39.06       | -43.84     | -    | 49.72      | 68.20      | 18.48  |
| 15 494.92 <sup>1)</sup> | H     | 53.30    | 38.22       | -41.55     | -    | 49.97      | 74.00      | 24.03  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 147.89 <sup>1)</sup>  | H     | 43.72    | 33.30       | -27.42     | 0.61 | 50.21      | 54.00      | 3.79   |

**802.11n\_HT40\_Highest Channel (5 230 MHz)**

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 428.78                                                      | V     | 54.80    | 39.06       | -43.84     | -    | 50.02      | 68.20      | 18.18  |
| 15 757.88 <sup>1)</sup>                                        | H     | 53.60    | 38.10       | -41.50     | -    | 50.20      | 74.00      | 23.80  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |


**802.11n\_HT40\_Lowest Channel (5 190 MHz)**

**Average data**

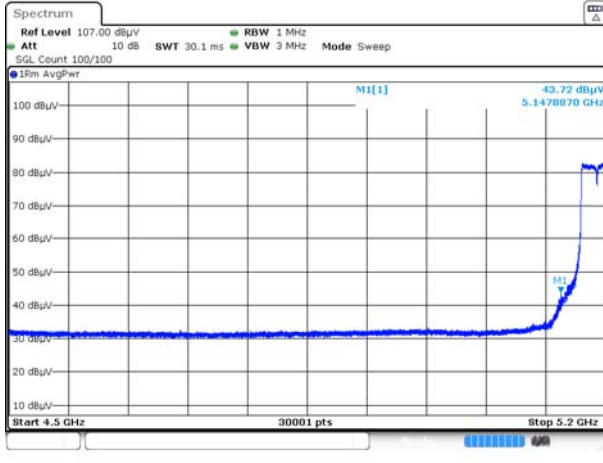

Blank

**Horizontal/Vertical for Band-edge**

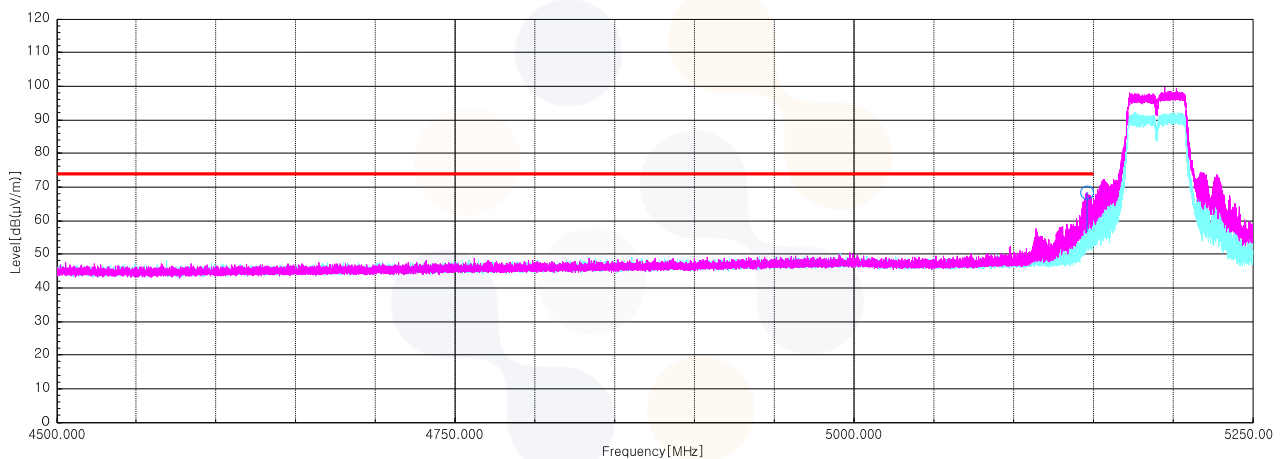

**802.11ac\_VHT20\_Lowest Channel (5 180 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.87 <sup>1)</sup>  | H     | 57.70    | 33.30       | -27.42     | -    | 63.58      | 74.00      | 10.42  |
| 10 416.52               | V     | 54.40    | 39.03       | -43.84     | -    | 49.59      | 68.20      | 18.61  |
| 15 502.20 <sup>1)</sup> | V     | 53.40    | 38.30       | -41.55     | -    | 50.15      | 74.00      | 23.85  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.87 <sup>1)</sup>  | H     | 38.81    | 33.30       | -27.42     | 0.29 | 44.98      | 54.00      | 9.02   |

**802.11ac\_VHT20\_Middle Channel (5 200 MHz)**


| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 406.93                                                     | V     | 55.00    | 39.01       | -43.84     | -    | 50.17      | 68.20      | 18.03  |
| 15 630.62 <sup>1)</sup>                                       | H     | 53.00    | 37.88       | -41.53     | -    | 49.35      | 74.00      | 24.65  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

**802.11ac\_VHT20\_Highest Channel (5 240 MHz)**

| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 498.55                                                     | V     | 54.80    | 39.00       | -43.84     | -    | 49.96      | 68.20      | 18.24  |
| 15 676.62 <sup>1)</sup>                                       | H     | 53.70    | 38.15       | -41.52     | -    | 50.33      | 74.00      | 23.67  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |


**802.11ac\_VHT20\_Lowest Channel (5 180 MHz)**

**Average data**

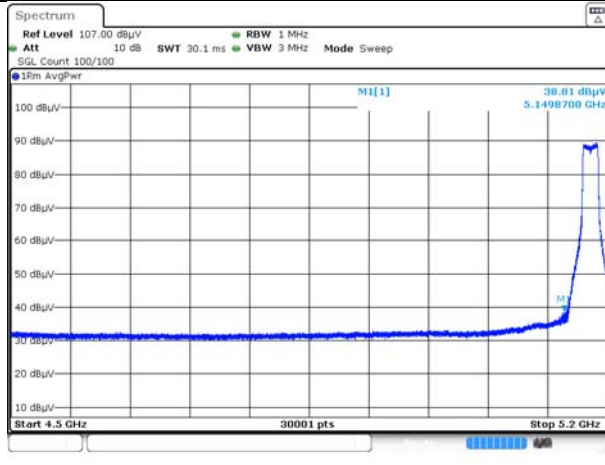

Blank

**Horizontal/Vertical for Band-edge**

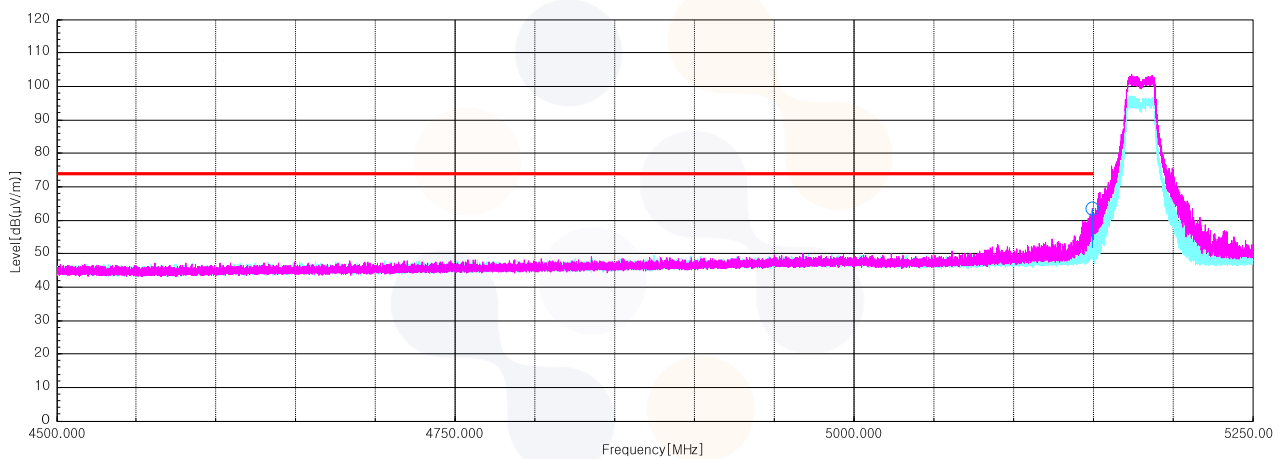

**802.11ac\_VHT40\_Lowest Channel (5 190 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.61 <sup>1)</sup>  | H     | 61.40    | 33.30       | -27.42     | -    | 67.28      | 74.00      | 6.72   |
| 10 414.98               | H     | 55.20    | 39.03       | -43.84     | -    | 50.39      | 68.20      | 17.81  |
| 15 477.67 <sup>1)</sup> | H     | 52.90    | 38.29       | -41.56     | -    | 49.63      | 74.00      | 24.37  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.61 <sup>1)</sup>  | H     | 43.92    | 33.30       | -27.42     | 0.66 | 50.46      | 54.00      | 3.54   |

**802.11ac\_VHT40\_Highest Channel (5 240 MHz)**

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 559.12                                                      | V     | 55.40    | 39.12       | -43.98     | -    | 50.54      | 68.20      | 17.66  |
| 15 754.82 <sup>1)</sup>                                        | H     | 54.10    | 38.10       | -41.51     | -    | 50.69      | 74.00      | 23.31  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |


**802.11ac\_VHT40\_Lowest Channel (5 190 MHz)**

**Average data**

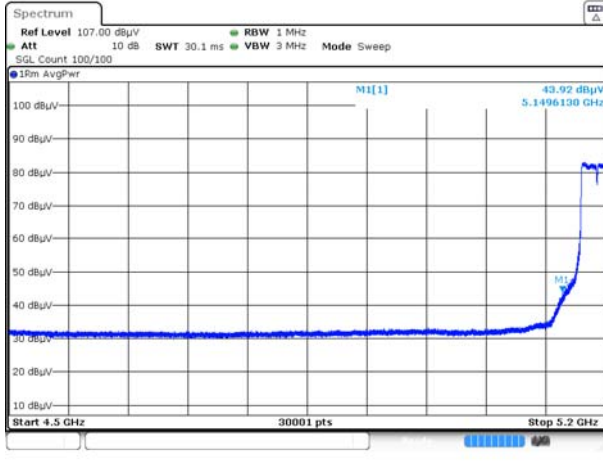



Blank

**Horizontal/Vertical for Band-edge**

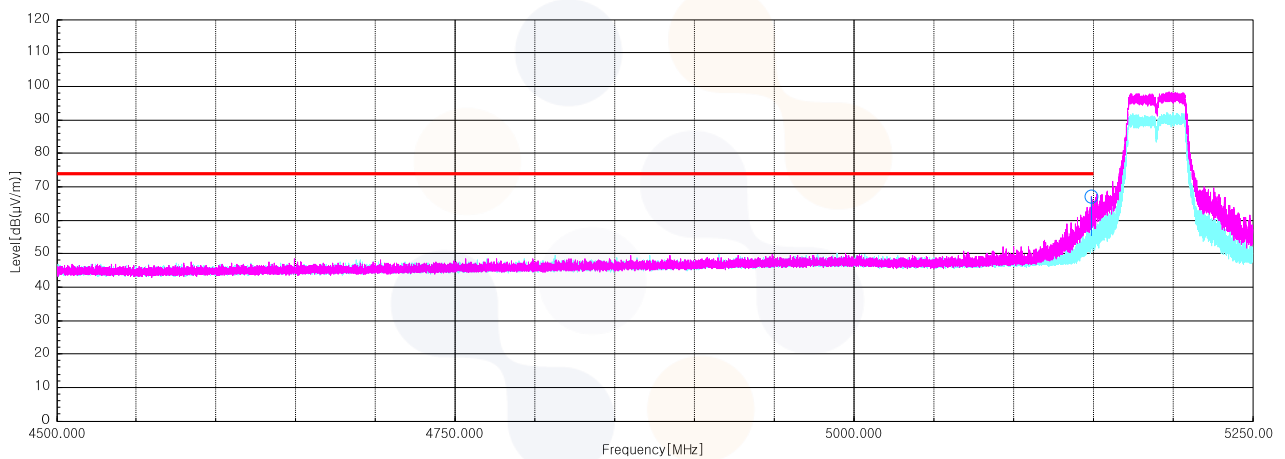

### 802.11ac\_VHT80\_Middle Channel (5 210 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 147.58 <sup>1)</sup>  | H     | 64.00    | 33.20       | -27.43     | -    | 69.77      | 74.00      | 4.23   |
| 10 388.92               | V     | 55.30    | 38.82       | -43.84     | -    | 50.28      | 68.20      | 17.92  |
| 15 719.93 <sup>1)</sup> | H     | 54.20    | 38.10       | -41.51     | -    | 50.79      | 74.00      | 23.21  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 147.58 <sup>1)</sup>  | H     | 44.50    | 33.20       | -27.43     | 1.15 | 51.42      | 54.00      | 2.58   |

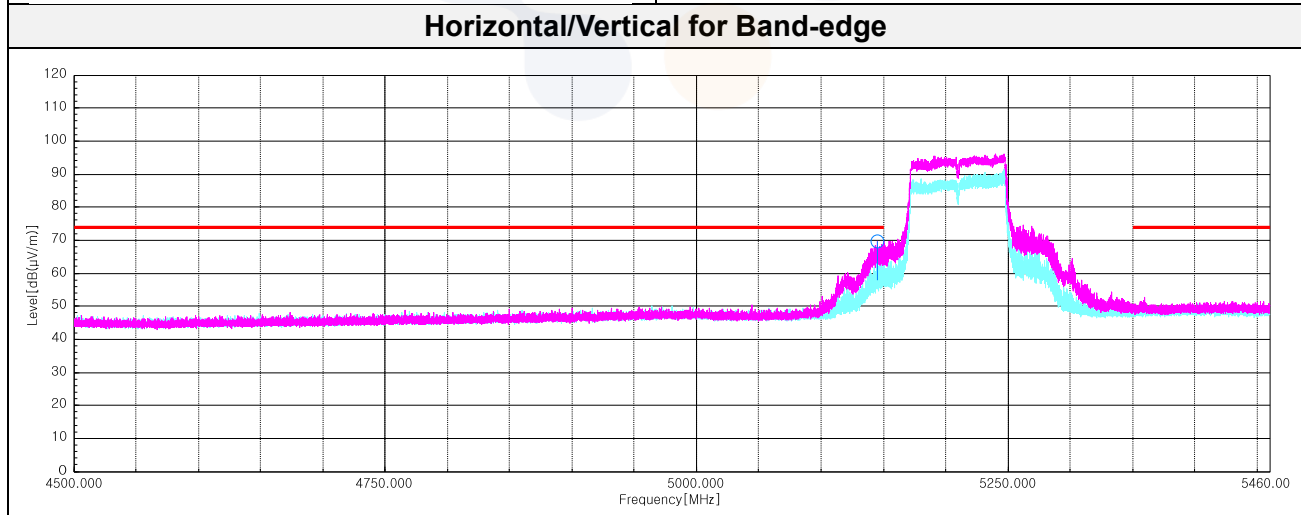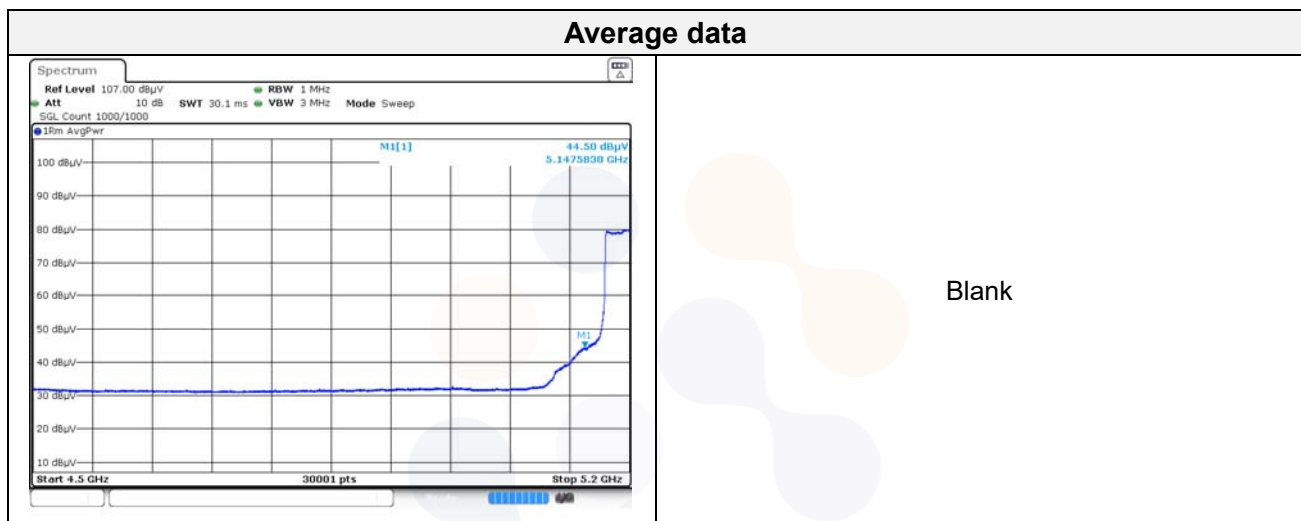

## UNII-1 2TX MIMO

### 802.11a\_Lowest Channel (5 180 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.92 <sup>1)</sup>  | H     | 61.00    | 33.30       | -27.42     | -    | 66.88      | 74.00      | 7.12   |
| 10 298.45               | H     | 54.90    | 39.10       | -43.85     | -    | 50.15      | 68.20      | 18.05  |
| 15 602.25 <sup>1)</sup> | H     | 54.00    | 37.99       | -41.53     | -    | 50.46      | 74.00      | 23.54  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.92 <sup>1)</sup>  | H     | 45.04    | 33.30       | -27.42     | 0.25 | 51.17      | 54.00      | 2.83   |

### 802.11a\_Middle Channel (5 200 MHz)


| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 424.18                                                     | H     | 55.50    | 39.05       | -43.84     | -    | 50.71      | 68.20      | 17.49  |
| 15 567.75 <sup>1)</sup>                                       | V     | 53.90    | 38.16       | -41.54     | -    | 50.52      | 74.00      | 23.48  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

### 802.11a\_Highest Channel (5 240 MHz)

| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 527.30                                                     | H     | 56.00    | 39.00       | -43.90     | -    | 51.10      | 68.20      | 17.10  |
| 15 780.88 <sup>1)</sup>                                       | V     | 54.20    | 38.10       | -41.48     | -    | 50.82      | 74.00      | 23.18  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |


**802.11a\_Lowest Channel (5 180 MHz)**

**Average data**

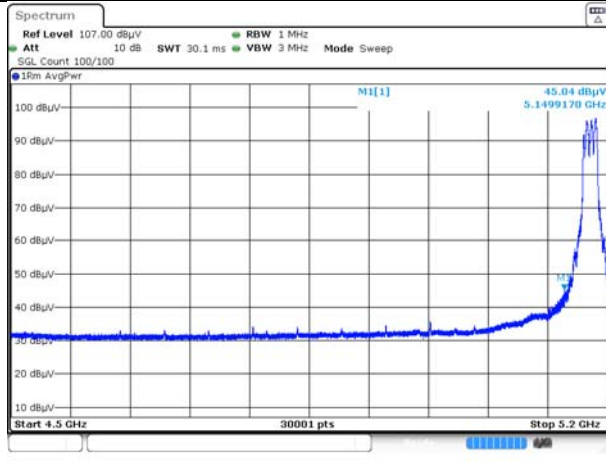

Blank

**Horizontal/Vertical for Band-edge**

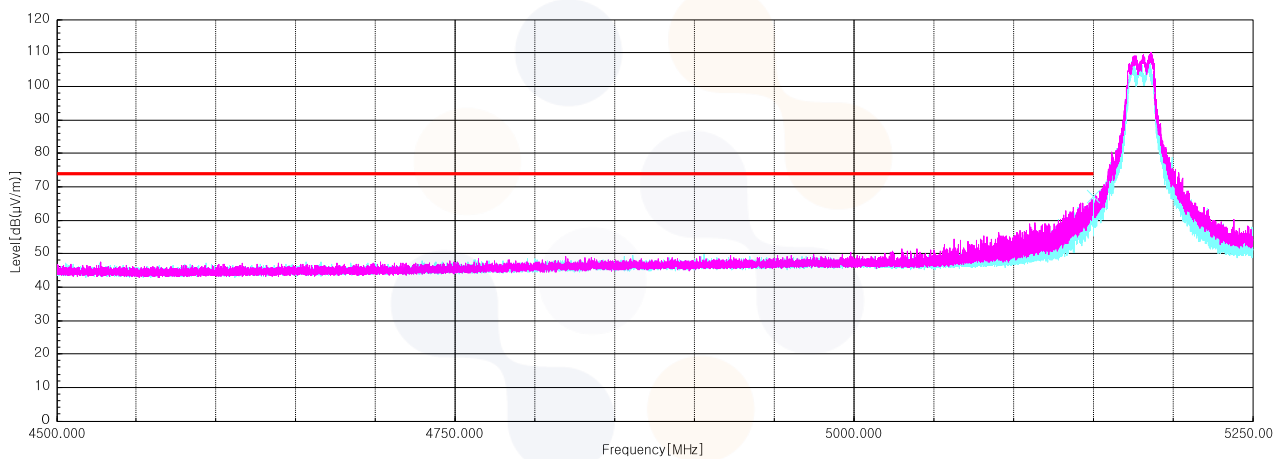

**802.11n\_HT20\_Lowest Channel (5 180 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.96 <sup>1)</sup>  | H     | 58.50    | 33.30       | -27.42     | -    | 64.38      | 74.00      | 9.62   |
| 10 321.83               | H     | 55.10    | 38.96       | -43.85     | -    | 50.21      | 68.20      | 17.99  |
| 15 495.30 <sup>1)</sup> | H     | 53.40    | 38.22       | -41.55     | -    | 50.07      | 74.00      | 23.93  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.96 <sup>1)</sup>  | H     | 41.43    | 33.30       | -27.42     | 0.54 | 47.85      | 54.00      | 6.15   |

**802.11n\_HT20\_Middle Channel (5 200 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 452.93               | H     | 54.60    | 39.00       | -43.84     | -    | 49.76      | 68.20      | 18.44  |
| 15 619.02 <sup>1)</sup> | H     | 55.30    | 37.92       | -41.53     | -    | 51.69      | 74.00      | 22.31  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 619.02 <sup>1)</sup> | H     | 43.81    | 37.92       | -41.53     | 0.54 | 40.74      | 54.00      | 13.26  |

**802.11n\_HT20\_Highest Channel (5 240 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 532.28               | H     | 55.20    | 39.00       | -43.92     | -    | 50.28      | 68.20      | 17.92  |
| 15 742.22 <sup>1)</sup> | H     | 55.20    | 38.10       | -41.51     | -    | 51.79      | 74.00      | 22.21  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 742.22 <sup>1)</sup> | H     | 43.81    | 38.10       | -41.51     | 0.54 | 40.94      | 54.00      | 13.06  |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11n\_HT20\_Lowest Channel (5 180 MHz)**

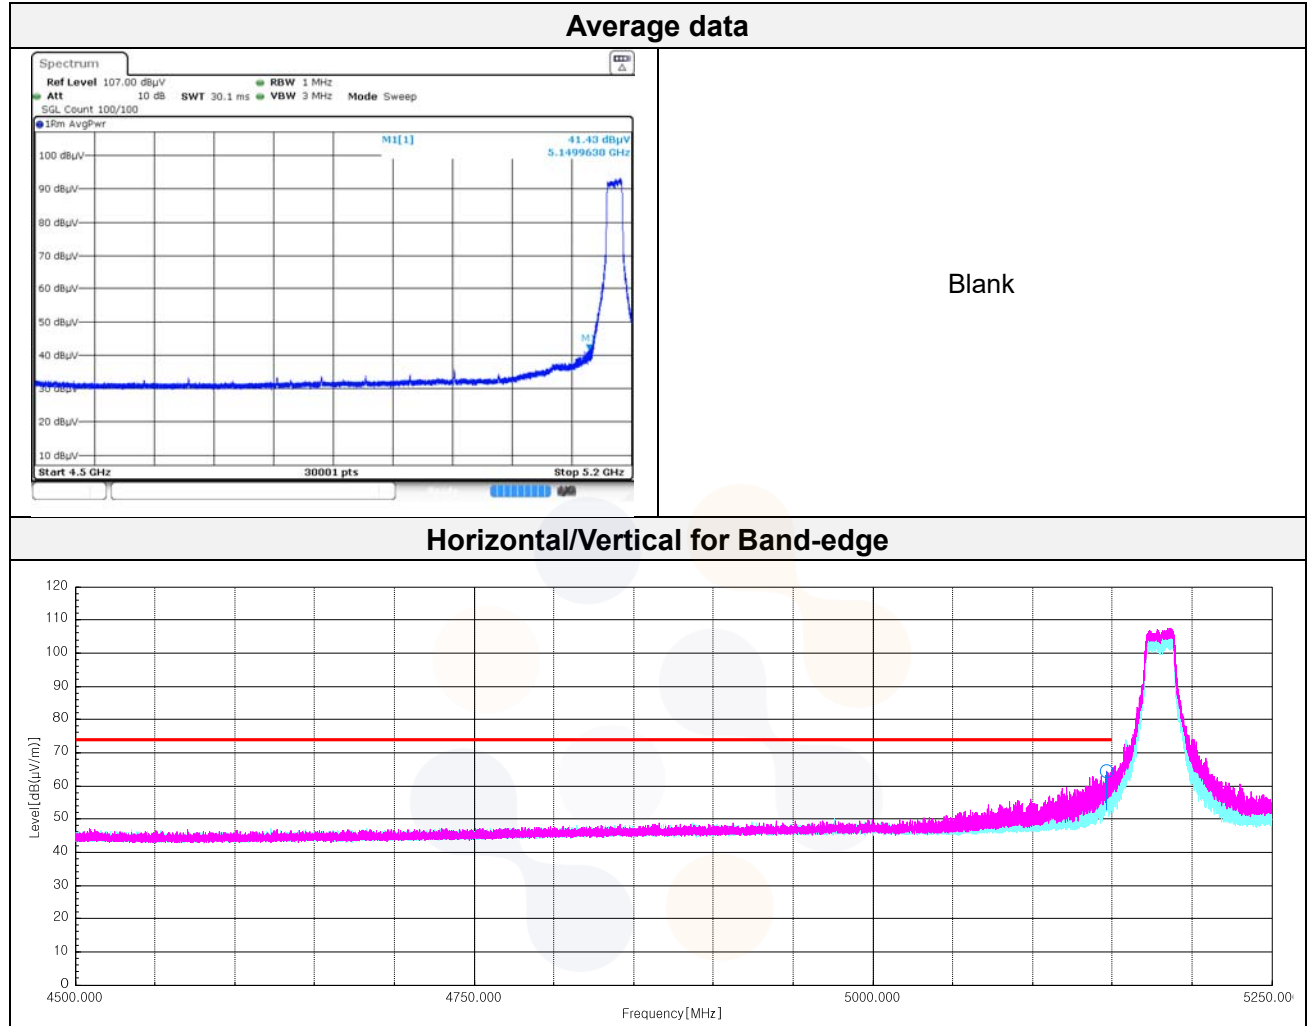

**802.11n\_HT40\_Lowest Channel (5 190 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.85 <sup>1)</sup>  | H     | 60.60    | 33.30       | -27.42     | -    | 66.48      | 74.00      | 7.52   |
| 10 424.18               | V     | 55.40    | 39.05       | -43.84     | -    | 50.61      | 68.20      | 17.59  |
| 15 583.47 <sup>1)</sup> | V     | 54.00    | 38.13       | -41.54     | -    | 50.59      | 74.00      | 23.41  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.85 <sup>1)</sup>  | H     | 43.11    | 33.30       | -27.42     | 1.17 | 50.16      | 54.00      | 3.84   |

**802.11n\_HT40\_Highest Channel (5 230 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 510.05               | H     | 55.00    | 39.00       | -43.86     | -    | 50.14      | 68.20      | 18.06  |
| 15 810.03 <sup>1)</sup> | V     | 55.20    | 38.22       | -41.45     | -    | 51.97      | 74.00      | 22.03  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 810.03 <sup>1)</sup> | V     | 43.97    | 38.22       | -41.45     | -    | 40.74      | 54.00      | 13.26  |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11n\_HT40\_Lowest Channel (5 190 MHz)**

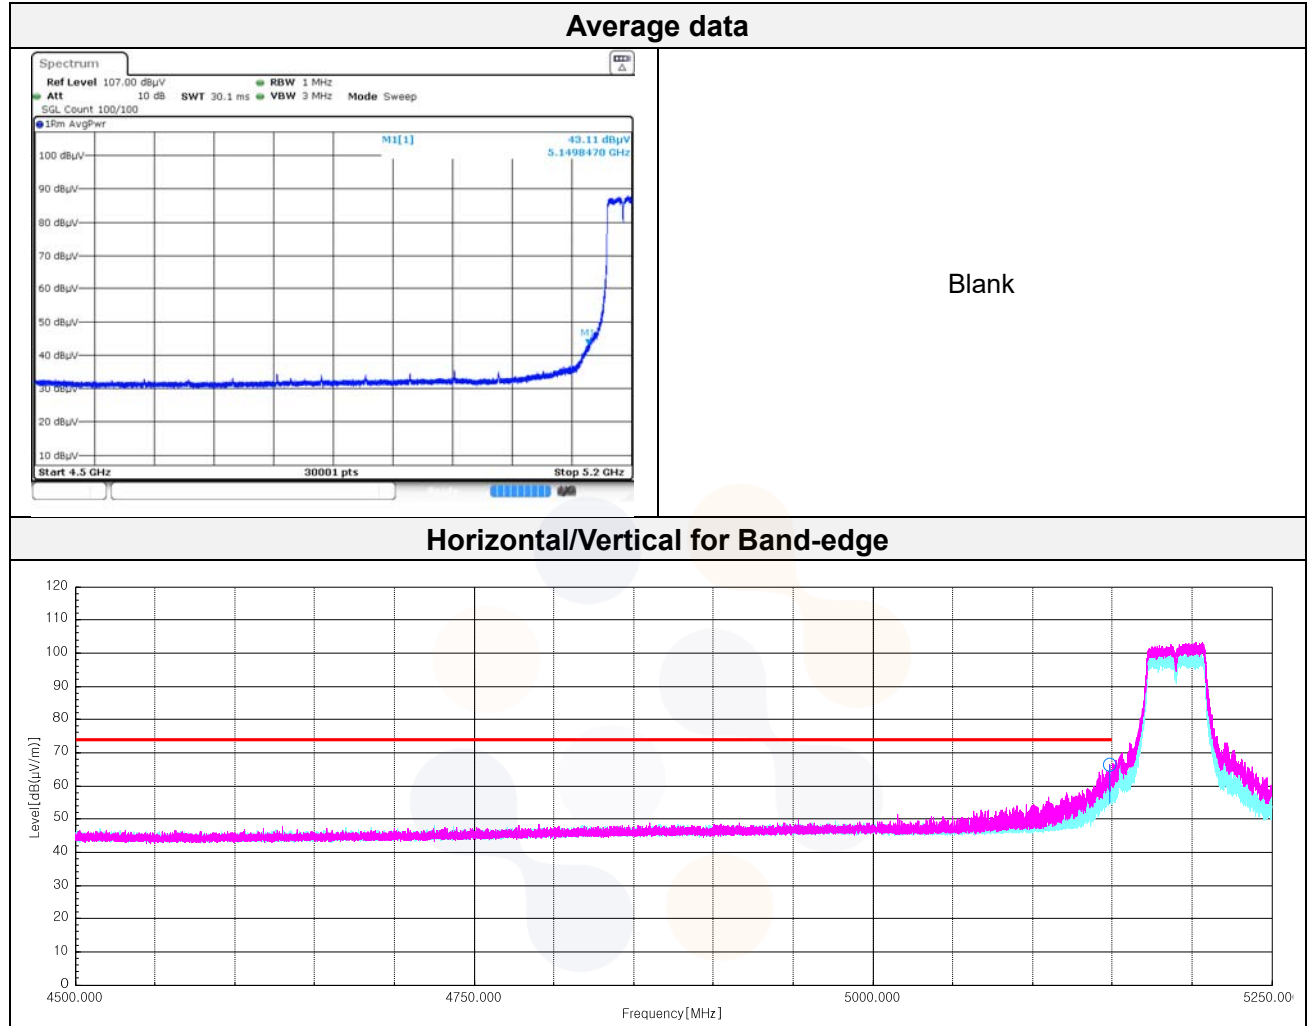

**802.11ac\_VHT20\_Lowest Channel (5 180 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.12 <sup>1)</sup>  | H     | 58.40    | 33.20       | -27.43     | -    | 64.17      | 74.00      | 9.83   |
| 10 294.62               | H     | 54.70    | 39.10       | -43.85     | -    | 49.95      | 68.20      | 18.25  |
| 15 481.12 <sup>1)</sup> | V     | 53.70    | 38.28       | -41.56     | -    | 50.42      | 74.00      | 23.58  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.12 <sup>1)</sup>  | H     | 39.05    | 33.20       | -27.42     | 0.64 | 45.50      | 54.00      | 8.50   |

**802.11ac\_VHT20\_Middle Channel (5 200 MHz)**


| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 464.05                                                     | H     | 56.10    | 39.00       | -43.84     | -    | 51.26      | 68.20      | 16.94  |
| 15 602.25 <sup>1)</sup>                                       | H     | 53.80    | 37.99       | -41.53     | -    | 50.26      | 74.00      | 23.74  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |

**802.11ac\_VHT20\_Highest Channel (5 240 MHz)**

| Frequency                                                     | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|---------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                         | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                              |       |          |             |            |      |            |            |        |
| 10 465.58                                                     | H     | 54.90    | 39.00       | -43.84     | -    | 50.06      | 68.20      | 18.14  |
| 15 799.67 <sup>1)</sup>                                       | V     | 54.10    | 38.10       | -41.46     | -    | 50.74      | 74.00      | 23.26  |
| <b>Average Data</b>                                           |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit |       |          |             |            |      |            |            |        |


**802.11ac\_VHT20\_Lowest Channel (5 180 MHz)**

**Average data**

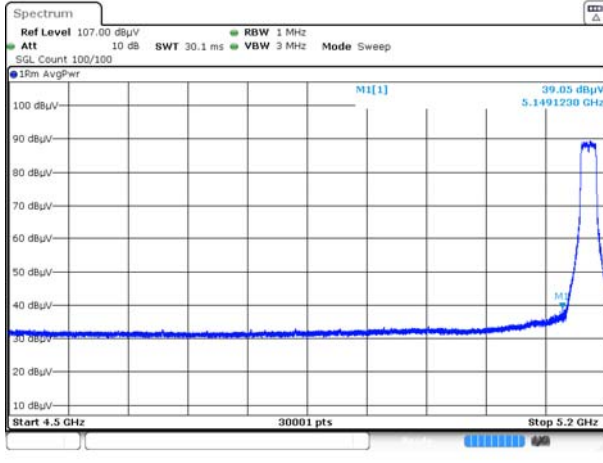

Blank

**Horizontal/Vertical for Band-edge**

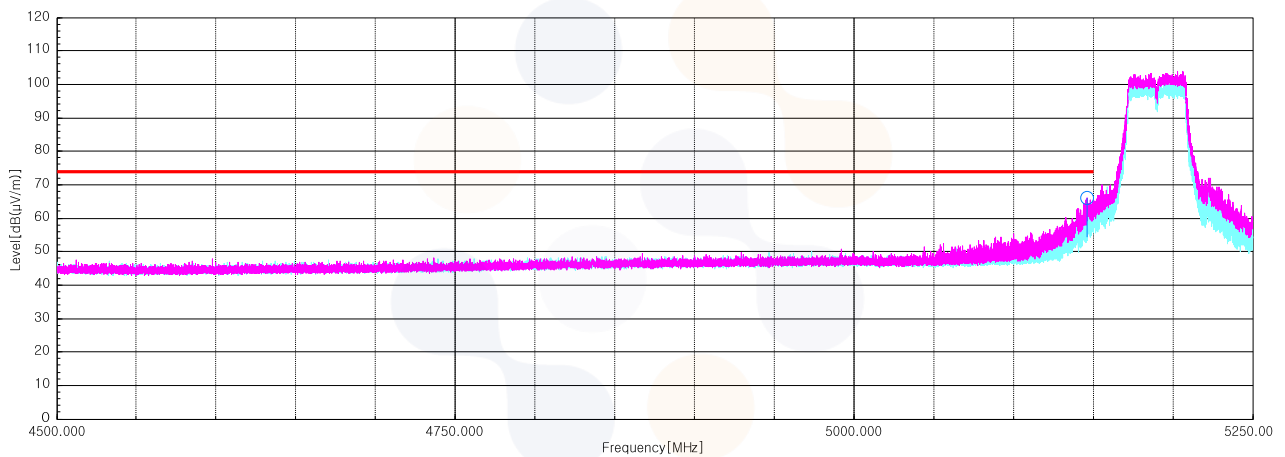

**802.11ac\_VHT40\_Lowest Channel (5 190 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 149.94 <sup>1)</sup>  | H     | 60.20    | 33.30       | -27.42     | -    | 66.08      | 74.00      | 7.92   |
| 10 411.92               | V     | 55.00    | 39.02       | -43.84     | -    | 50.18      | 68.20      | 18.02  |
| 15 593.56 <sup>1)</sup> | H     | 54.80    | 38.11       | -41.54     | -    | 51.37      | 74.00      | 22.63  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 149.94 <sup>1)</sup>  | H     | 44.43    | 33.30       | -27.42     | 0.90 | 51.21      | 54.00      | 2.79   |
| 15 593.56 <sup>1)</sup> | H     | 43.66    | 38.11       | -41.54     | 0.90 | 41.13      | 54.00      | 12.87  |

**802.11ac\_VHT40\_Highest Channel (5 230 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 477.08               | V     | 55.50    | 39.00       | -43.84     | -    | 50.66      | 68.20      | 17.54  |
| 15 763.41 <sup>1)</sup> | V     | 55.10    | 38.10       | -41.50     | -    | 51.70      | 74.00      | 22.30  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 763.41 <sup>1)</sup> | V     | 43.76    | 38.10       | -41.50     | 0.90 | 41.26      | 54.00      | 12.74  |



In order to simplify the report, attached plots were only the lowest margin condition

**802.11ac\_VHT40\_Lowest Channel (5 190 MHz)**

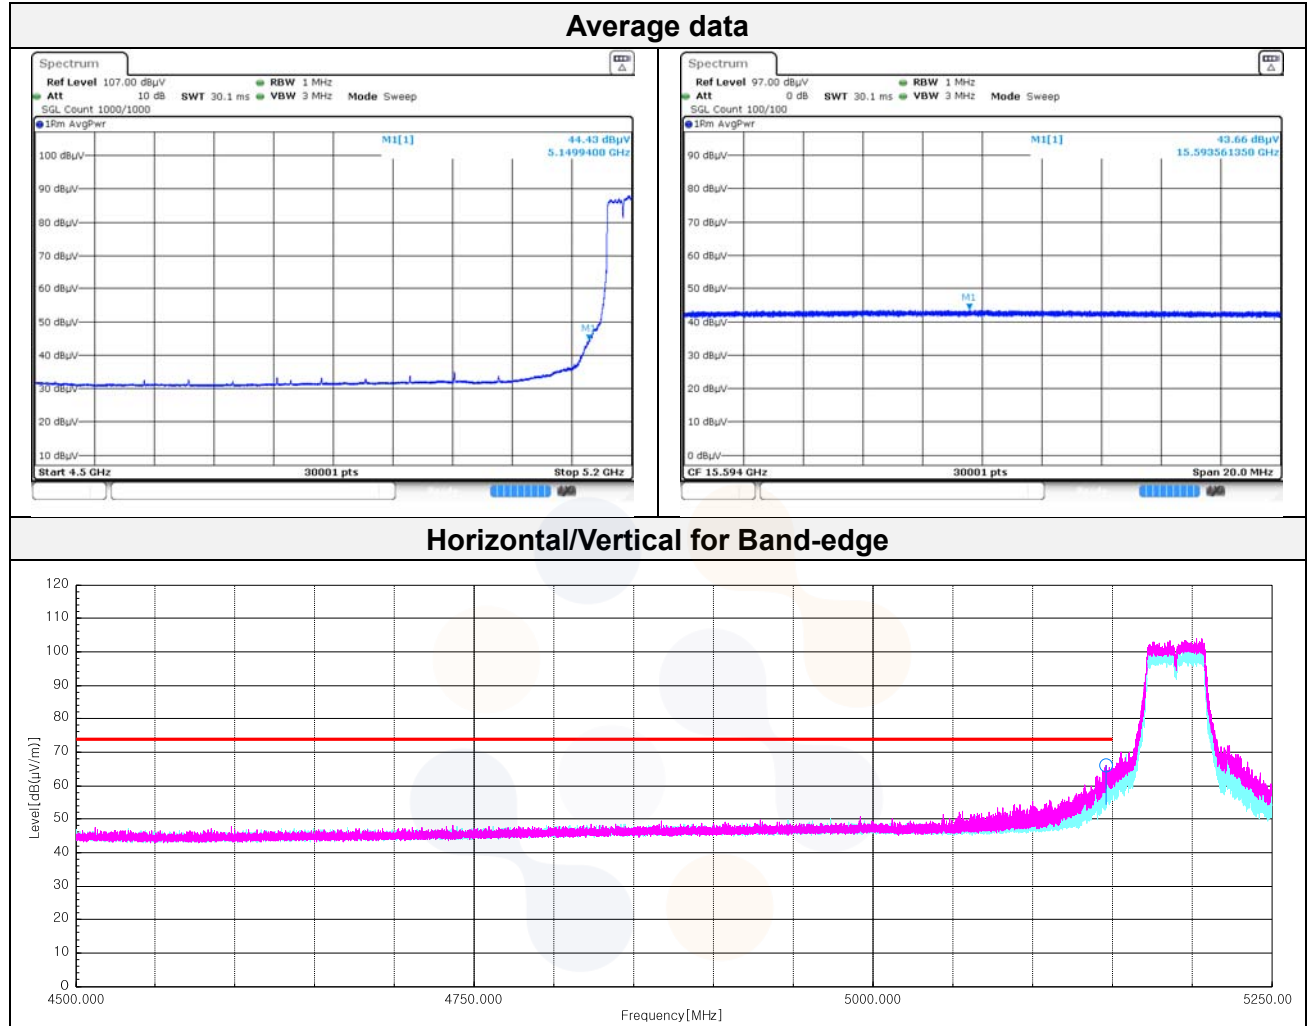

### 802.11ac\_VHT80\_Middle Channel (5 210 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 146.09 <sup>1)</sup>  | H     | 58.40    | 33.20       | -27.43     | -    | 64.17      | 74.00      | 9.83   |
| 10 305.73               | V     | 55.20    | 38.99       | -43.85     | -    | 50.34      | 68.20      | 17.86  |
| 15 595.35 <sup>1)</sup> | V     | 53.60    | 38.11       | -41.53     | -    | 50.18      | 74.00      | 23.82  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 146.09 <sup>1)</sup>  | H     | 43.71    | 33.20       | -27.43     | 1.87 | 51.35      | 54.00      | 2.65   |

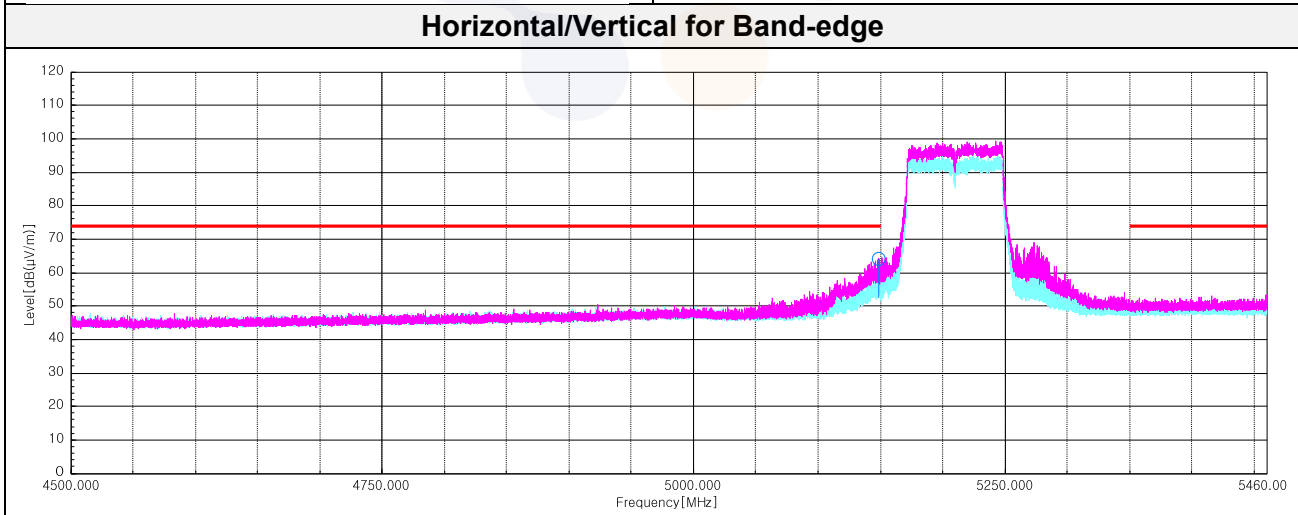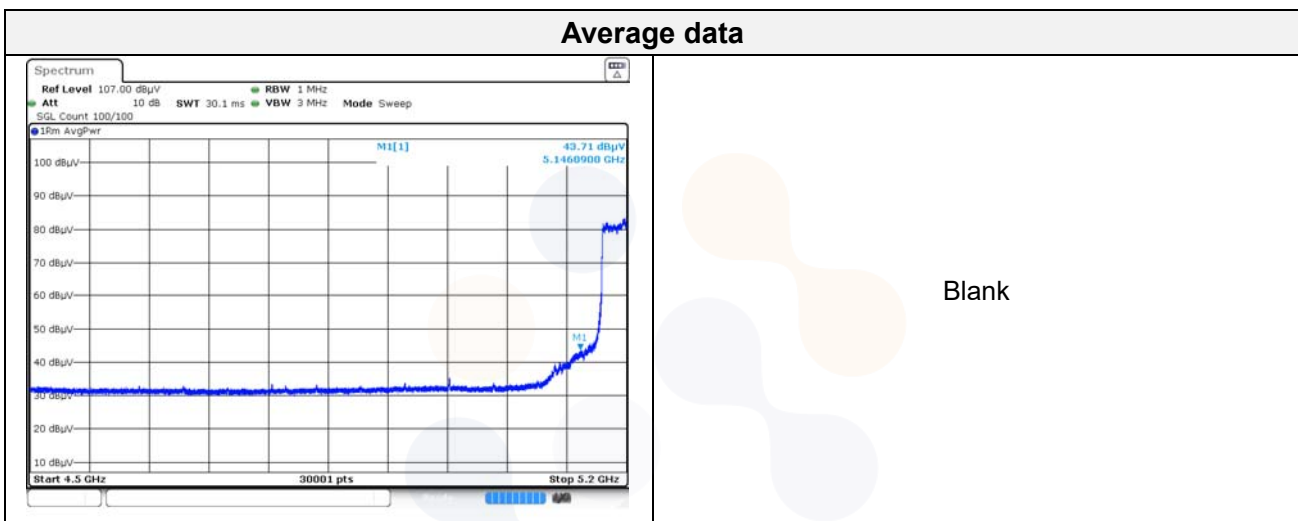


### Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

#### 802.11ac VHT80\_UNII-1\_1TX SISO\_ Middle Channel (5 210 MHz)


Horizontal/Vertical for 1 GHz ~ 6.5 GHz

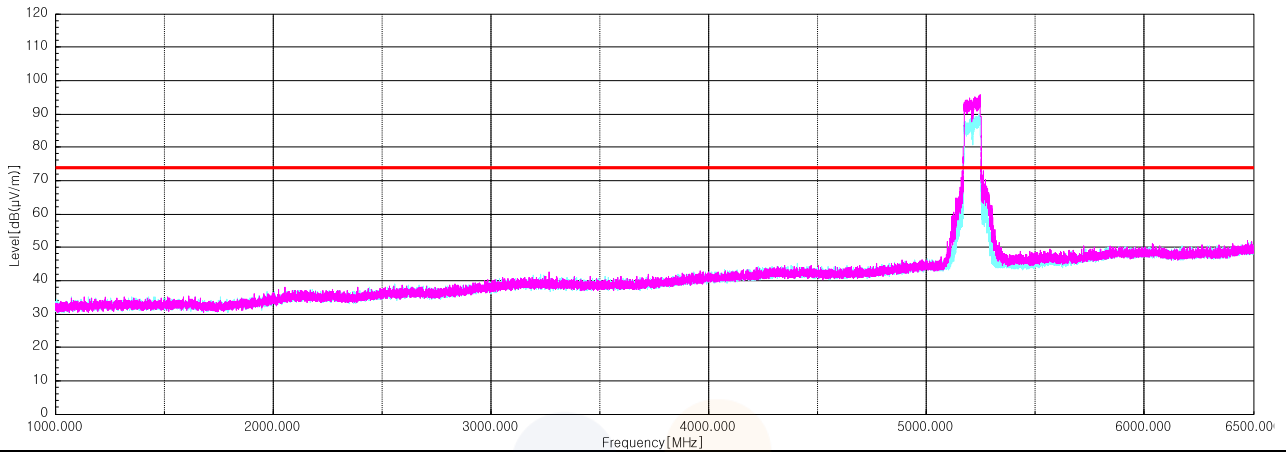

Horizontal/Vertical for 6.5 GHz ~ 18 GHz

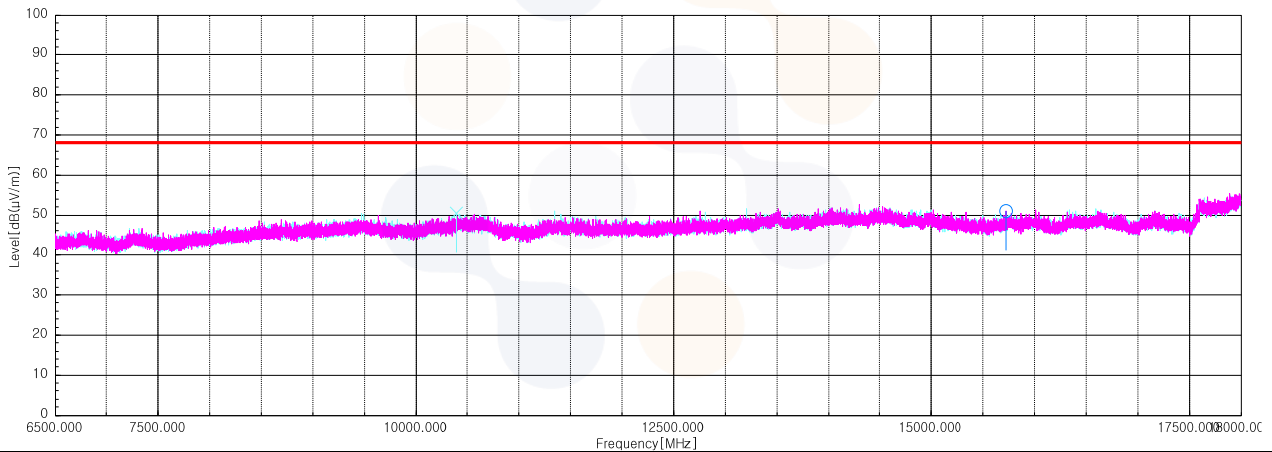

Horizontal/Vertical for 18 GHz ~ 40 GHz

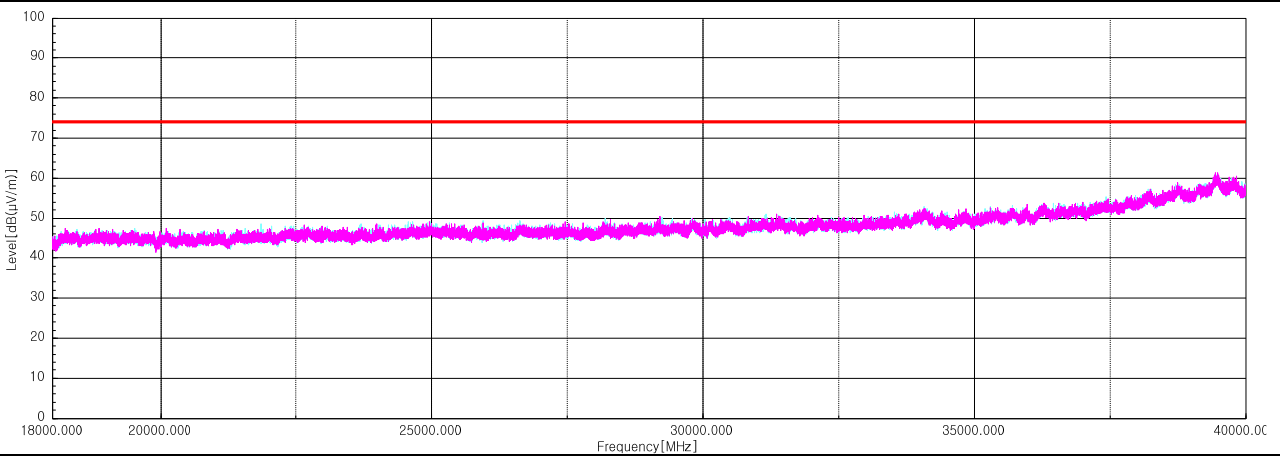

## UNII-2A SISO

### 802.11a\_Lowest Channel (5 260 MHz)

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 555.28                                                      | V     | 55.20    | 39.11       | -43.97     | -    | 50.34      | 68.20      | 17.86  |
| 15 809.25 <sup>1)</sup>                                        | V     | 53.80    | 38.22       | -41.45     | -    | 50.57      | 74.00      | 23.43  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11a\_Middle Channel (5 280 MHz)



| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 576.75                                                      | H     | 55.60    | 39.15       | -44.02     | -    | 50.73      | 68.20      | 17.47  |
| 15 774.37 <sup>1)</sup>                                        | H     | 54.00    | 38.10       | -41.49     | -    | 50.61      | 74.00      | 23.39  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11a\_Highest Channel (5 320 MHz)


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.08 <sup>1)</sup>  | H     | 60.50    | 33.00       | -27.07     | -    | 66.43      | 74.00      | 7.57   |
| 10 606.27 <sup>1)</sup> | V     | 54.50    | 39.21       | -44.09     | -    | 49.62      | 74.00      | 24.38  |
| 16 012.67 <sup>1)</sup> | H     | 54.20    | 38.20       | -41.29     | -    | 51.11      | 74.00      | 22.89  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.08 <sup>1)</sup>  | H     | 43.85    | 33.00       | -27.07     | 0.27 | 50.05      | 54.00      | 3.95   |
| 16 012.67 <sup>1)</sup> | H     | 43.77    | 38.20       | -41.29     | 0.27 | 40.95      | 54.00      | 13.05  |

## 802.11a\_Highest Channel (5 320 MHz)

### Average data

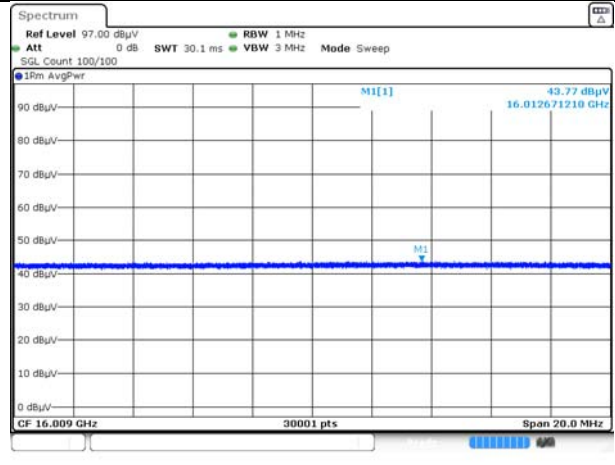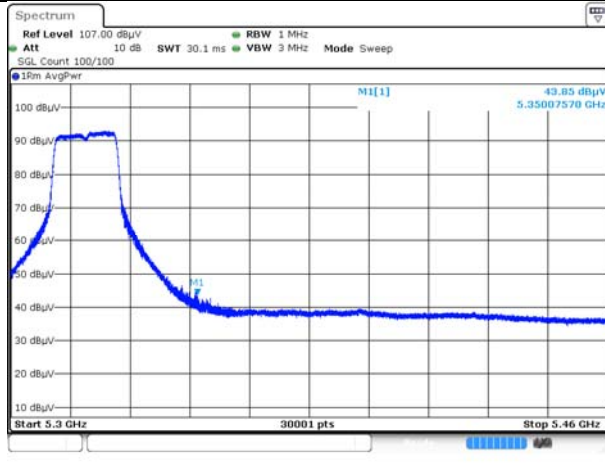

### Horizontal/Vertical for Band-edge

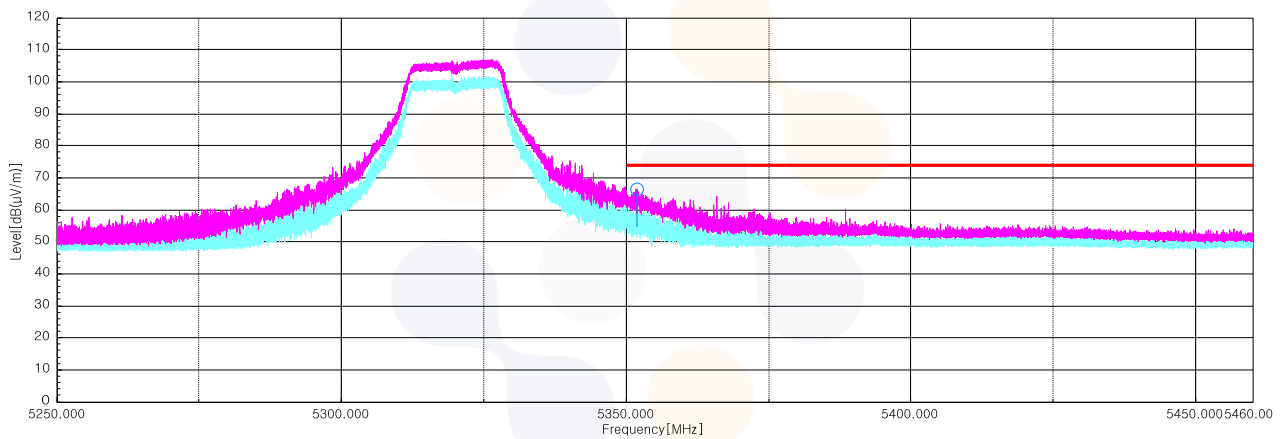

**802.11n\_HT20\_Lowest Channel (5 260 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 606.27 <sup>1)</sup> | H     | 55.50    | 39.21       | -44.09     | -    | 50.62      | 74.00      | 23.38  |
| 15 831.70 <sup>1)</sup> | H     | 54.30    | 38.26       | -41.43     | -    | 51.13      | 74.00      | 22.87  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 831.70 <sup>1)</sup> | H     | 43.58    | 38.26       | -41.43     | 0.32 | 40.73      | 54.00      | 13.27  |

**802.11n\_HT20\_Middle Channel (5 280 MHz)**


| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 502.38                                                      | H     | 55.50    | 39.00       | -43.85     | -    | 50.65      | 68.20      | 17.55  |
| 16 032.35 <sup>1)</sup>                                        | H     | 53.90    | 38.20       | -41.33     | -    | 50.77      | 74.00      | 23.23  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

**802.11n\_HT20\_Highest Channel (5 320 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.21 <sup>1)</sup>  | H     | 64.80    | 33.00       | -27.07     | -    | 70.73      | 74.00      | 3.27   |
| 10 555.67               | H     | 55.70    | 39.11       | -43.97     | -    | 50.84      | 68.20      | 17.36  |
| 15 765.17 <sup>1)</sup> | V     | 54.20    | 38.10       | -41.49     | -    | 50.81      | 74.00      | 23.19  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.21 <sup>1)</sup>  | H     | 43.82    | 33.00       | -27.07     | 0.32 | 50.07      | 54.00      | 3.93   |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11n\_HT20\_Highest Channel (5 320 MHz)**

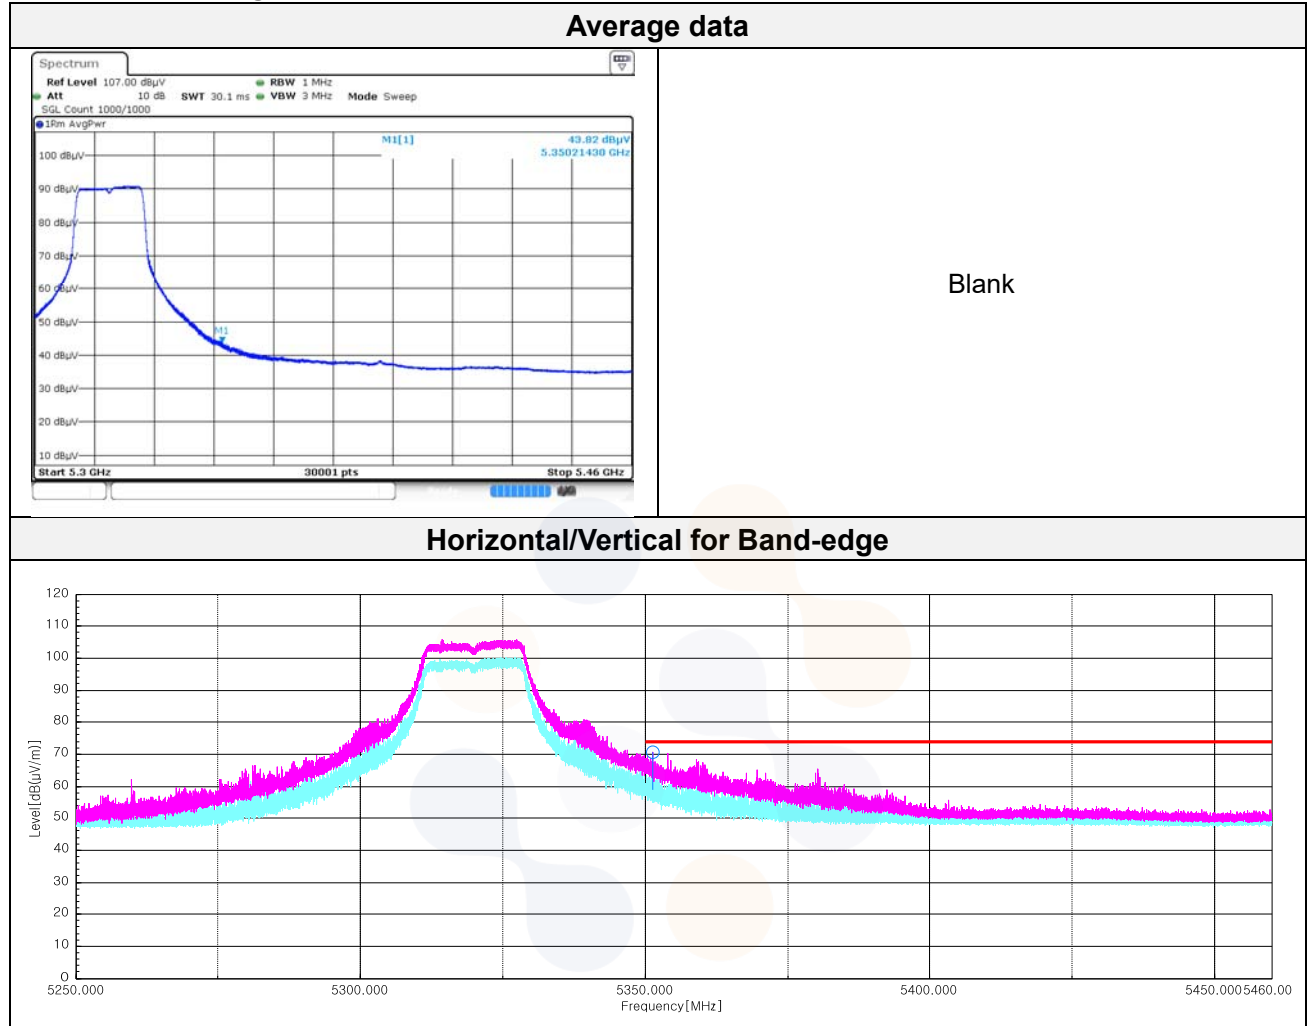

**802.11n\_HT40\_Lowest Channel (5 270 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 564.87               | H     | 55.00    | 39.13       | -43.99     | -    | 50.14      | 68.20      | 18.06  |
| 15 922.73 <sup>1)</sup> | V     | 54.20    | 38.20       | -41.34     | -    | 51.06      | 74.00      | 22.94  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 922.73 <sup>1)</sup> | V     | 43.97    | 38.20       | -41.34     | 0.61 | 41.44      | 54.00      | 12.56  |

**802.11n\_HT40\_Highest Channel (5 310 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.50 <sup>1)</sup>  | H     | 56.24    | 33.00       | -27.07     | -    | 62.17      | 74.00      | 11.83  |
| 5 351.50 <sup>1)</sup>  | H     | 55.21    | 33.00       | -27.07     | -    | 61.14      | 74.00      | 12.86  |
| 10 609.33 <sup>1)</sup> | H     | 55.50    | 39.22       | -44.10     | -    | 50.62      | 74.00      | 23.38  |
| 15 993.92 <sup>1)</sup> | V     | 54.20    | 38.20       | -41.27     | -    | 51.13      | 74.00      | 22.87  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.50 <sup>1)</sup>  | H     | 42.13    | 33.00       | -27.07     | 0.61 | 48.67      | 54.00      | 5.33   |
| 5 351.50 <sup>1)</sup>  | H     | 41.49    | 33.00       | -27.07     | 0.61 | 48.03      | 54.00      | 5.97   |
| 15 993.92 <sup>1)</sup> | V     | 43.82    | 38.20       | -41.27     | 0.61 | 41.36      | 54.00      | 12.64  |

In order to simplify the report, attached plots were only the lowest margin condition

### 802.11n\_HT40\_Highest Channel (5 310 MHz)

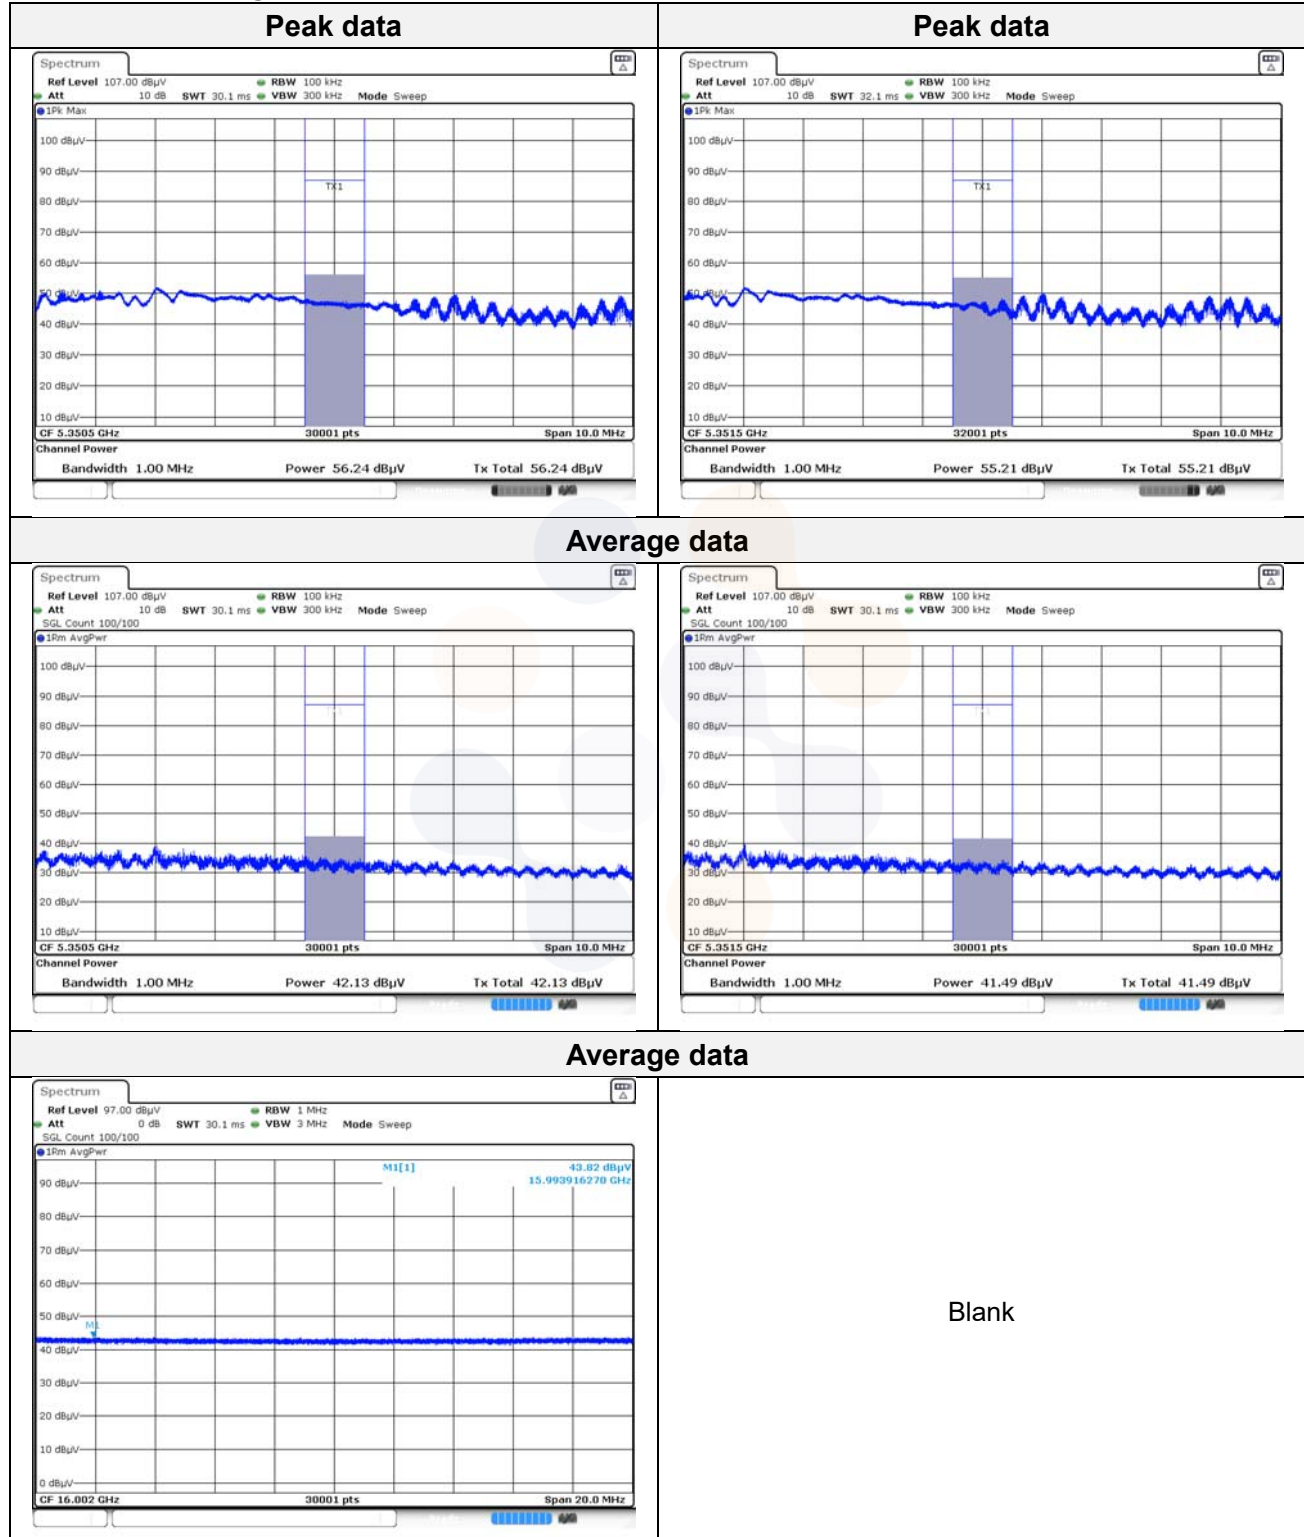

### Horizontal/Vertical for Band-edge

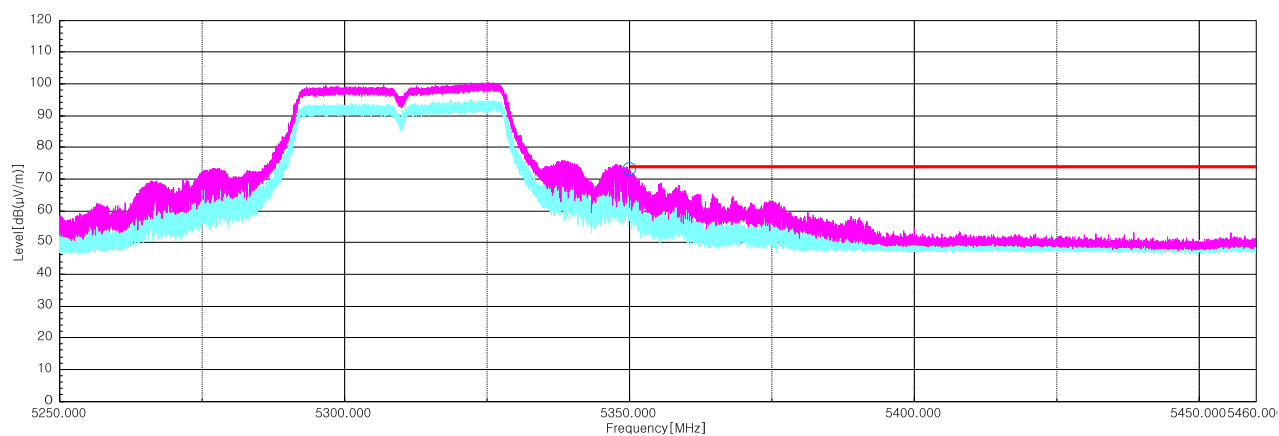

**802.11ac\_VHT20\_Lowest Channel (5 260 MHz)**

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 508.52                                                      | V     | 55.30    | 39.00       | -43.86     | -    | 50.44      | 68.20      | 17.76  |
| 15 852.57 <sup>1)</sup>                                        | H     | 54.10    | 38.20       | -41.41     | -    | 50.89      | 74.00      | 23.11  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

**802.11ac\_VHT20\_Middle Channel (5 280 MHz)**


| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 529.98                                                      | V     | 55.70    | 39.00       | -43.91     | -    | 50.79      | 68.20      | 17.41  |
| 15 779.35 <sup>1)</sup>                                        | V     | 54.20    | 38.10       | -41.48     | -    | 50.82      | 74.00      | 23.18  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

**802.11ac\_VHT20\_Highest Channel (5 320 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.04 <sup>1)</sup>  | H     | 64.10    | 33.00       | -27.07     | -    | 70.03      | 74.00      | 3.97   |
| 10 562.18               | V     | 55.60    | 39.12       | -43.99     | -    | 50.73      | 68.20      | 17.47  |
| 15 833.02 <sup>1)</sup> | V     | 54.10    | 38.27       | -41.43     | -    | 50.94      | 74.00      | 23.06  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.04 <sup>1)</sup>  | H     | 43.94    | 33.00       | -27.07     | 0.29 | 50.16      | 54.00      | 3.84   |


**802.11ac\_VHT20\_Highest Channel (5 320 MHz)**

**Average data**

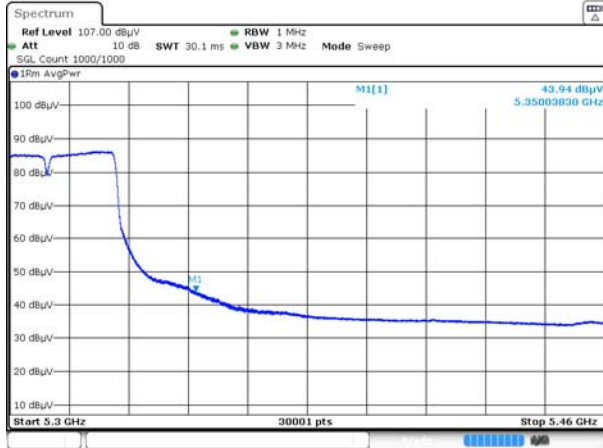

Blank

**Horizontal/Vertical for Band-edge**

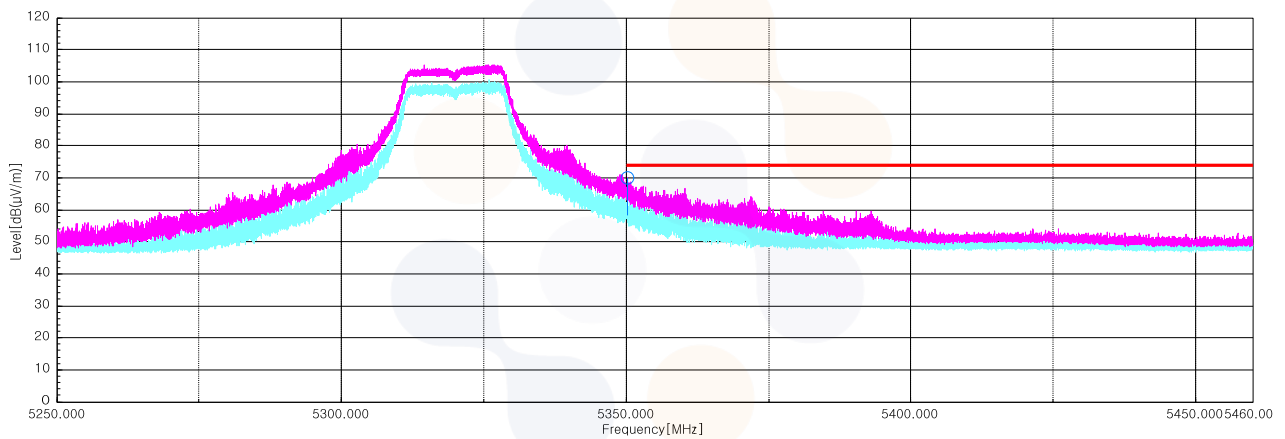

**802.11ac\_VHT40\_Lowest Channel (5 270 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 499.32               | V     | 55.00    | 39.00       | -43.84     | -    | 50.16      | 68.20      | 18.04  |
| 15 840.47 <sup>1)</sup> | V     | 54.70    | 38.28       | -41.42     | -    | 51.56      | 74.00      | 22.44  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 840.47 <sup>1)</sup> | V     | 43.42    | 38.28       | -41.42     | 0.66 | 40.94      | 54.00      | 13.06  |

**802.11ac\_VHT40\_Highest Channel (5 310 MHz)**

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.04 <sup>1)</sup>  | H     | 64.20    | 33.00       | -27.07     | -    | 70.13      | 74.00      | 3.87   |
| 10 569.47               | H     | 55.00    | 39.14       | -44.00     | -    | 50.14      | 68.20      | 18.06  |
| 15 988.38 <sup>1)</sup> | H     | 54.60    | 38.20       | -41.27     | -    | 51.53      | 74.00      | 22.47  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.04 <sup>1)</sup>  | H     | 43.53    | 33.00       | -27.07     | 0.66 | 50.12      | 54.00      | 3.88   |
| 15 988.38 <sup>1)</sup> | H     | 43.95    | 38.20       | -41.27     | 0.66 | 41.54      | 54.00      | 12.46  |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11ac\_VHT40\_Highest Channel (5 310 MHz)**

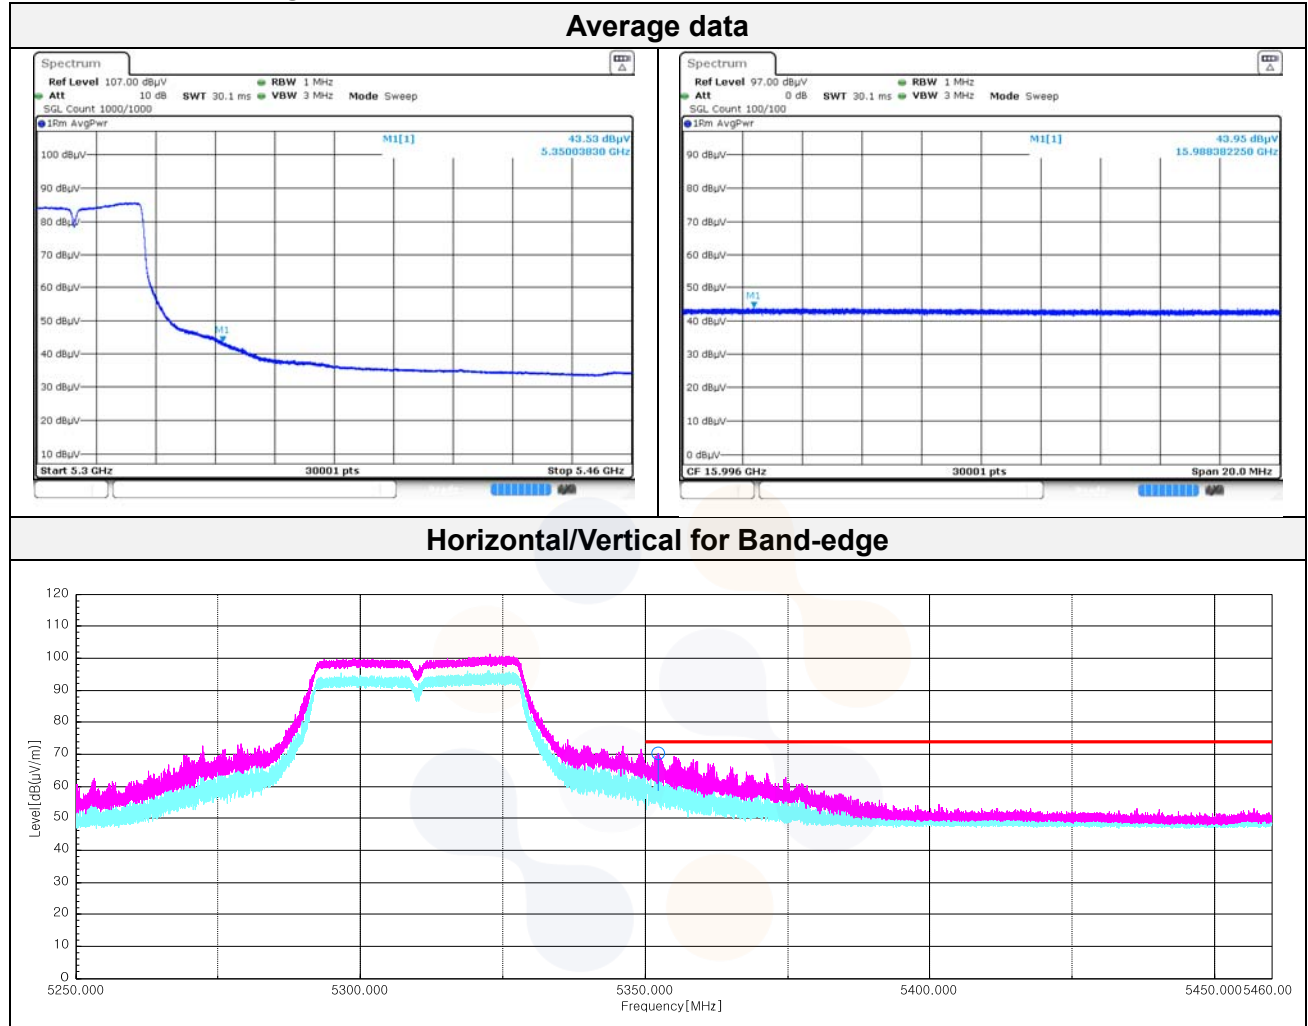


**802.11ac\_VHT80\_Middle Channel (5 290 MHz)**


| Frequency               | Pol.  | Reading         | Ant. Factor | Amp.+Cable | DCF  | Result            | Limit             | Margin |
|-------------------------|-------|-----------------|-------------|------------|------|-------------------|-------------------|--------|
| (MHz)                   | (V/H) | (dB( $\mu V$ )) | (dB)        | (dB)       | (dB) | (dB( $\mu V/m$ )) | (dB( $\mu V/m$ )) | (dB)   |
| <b>Peak data</b>        |       |                 |             |            |      |                   |                   |        |
| 5 350.50 <sup>1)</sup>  | H     | 57.87           | 33.00       | -27.07     | -    | 63.80             | 74.00             | 10.20  |
| 5 351.50 <sup>1)</sup>  | H     | 56.41           | 33.00       | -27.07     | -    | 62.34             | 74.00             | 11.66  |
| 10 576.37               | H     | 55.50           | 39.15       | -44.02     | -    | 50.63             | 68.20             | 17.57  |
| 15 879.70 <sup>1)</sup> | H     | 54.30           | 38.20       | -41.38     | -    | 51.12             | 74.00             | 22.88  |
| <b>Average Data</b>     |       |                 |             |            |      |                   |                   |        |
| 5 350.50 <sup>1)</sup>  | H     | 42.55           | 33.00       | -27.07     | 1.15 | 49.63             | 54.00             | 4.37   |
| 5 351.50 <sup>1)</sup>  | H     | 42.09           | 33.00       | -27.07     | 1.15 | 49.17             | 54.00             | 4.83   |
| 15 879.70 <sup>1)</sup> | H     | 43.75           | 38.20       | -41.38     | 1.15 | 41.72             | 54.00             | 12.28  |



### 802.11ac\_VHT80\_Middle Channel (5 290 MHz)

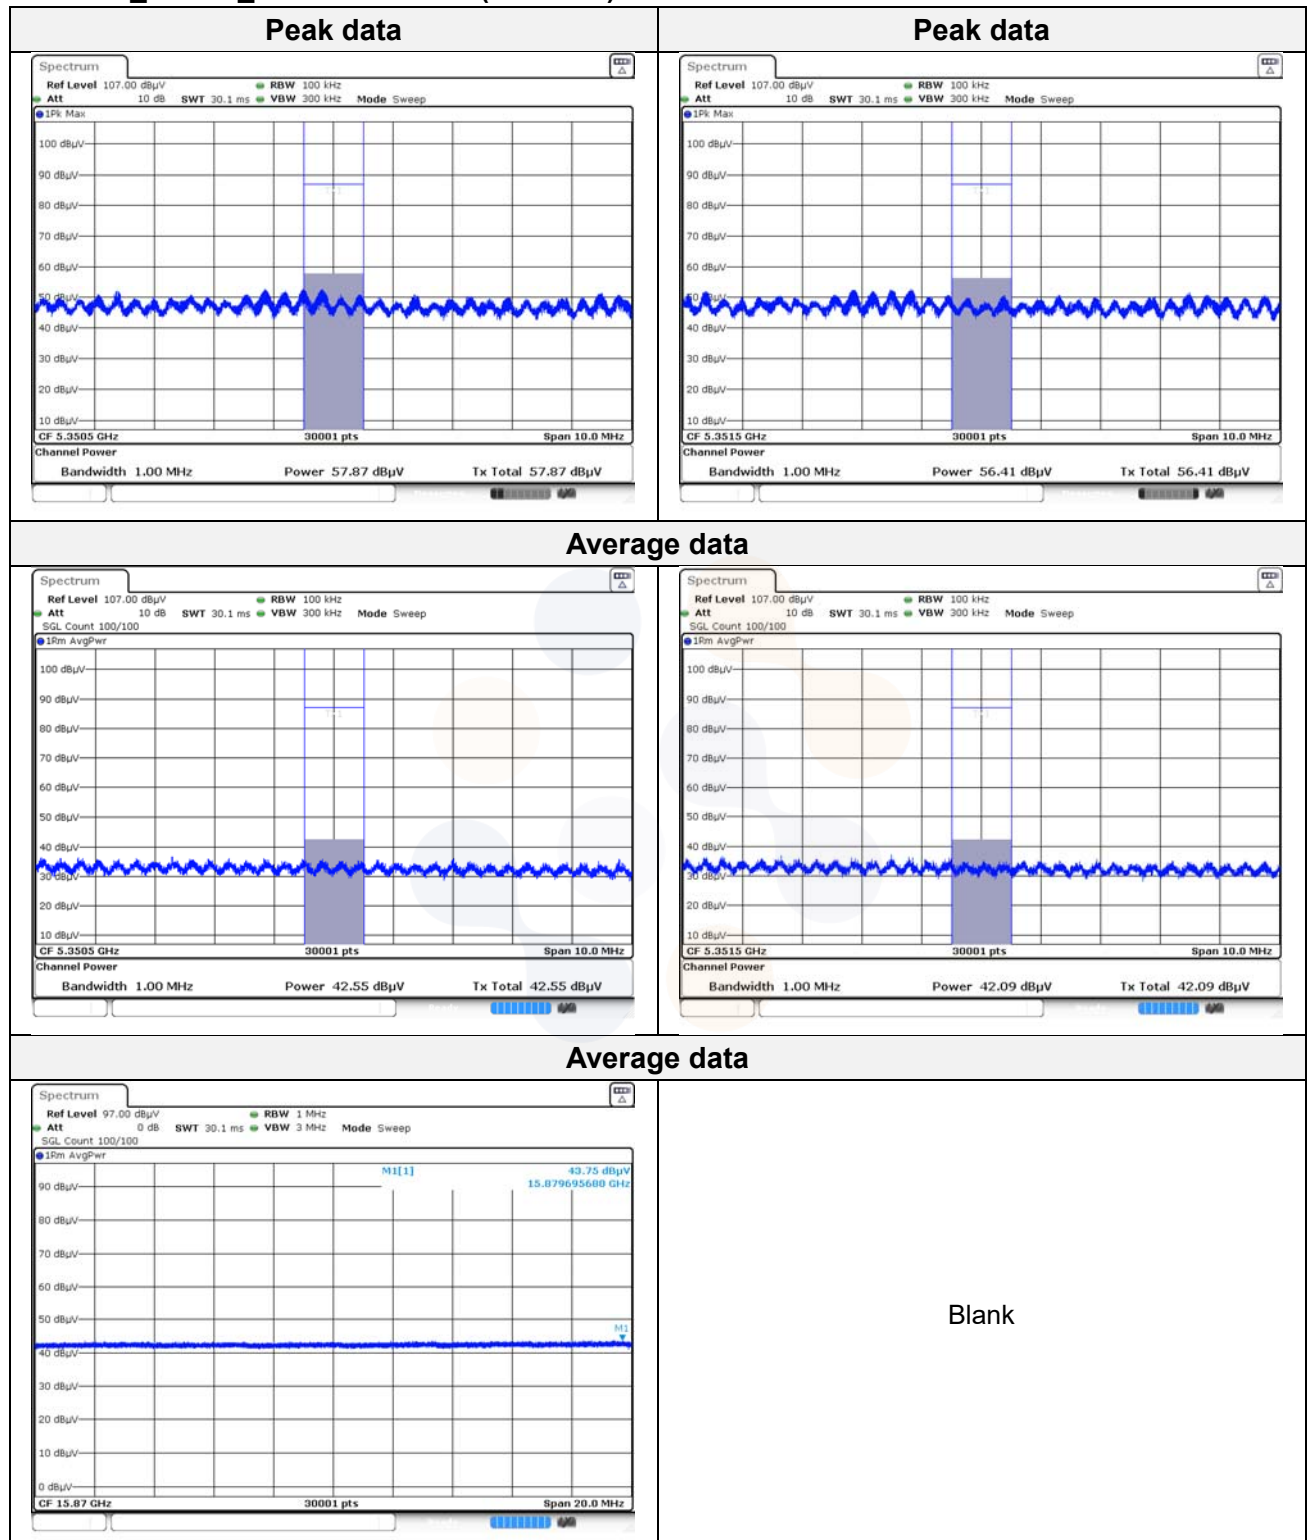

### Horizontal/Vertical for Band-edge

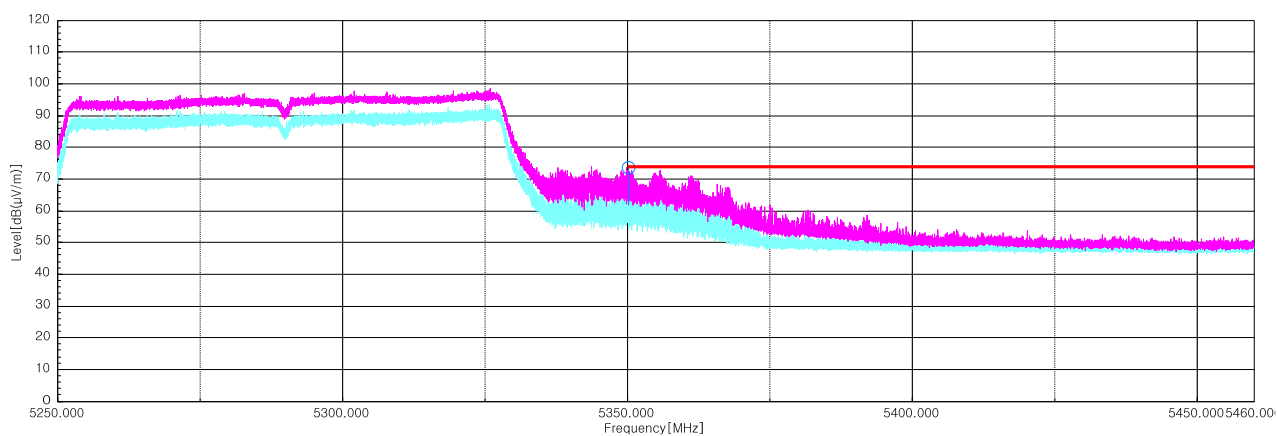

## UNII-2A 2TX MIMO

### 802.11a\_Lowest Channel (5 260 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 611.25 <sup>1)</sup> | V     | 54.90    | 39.22       | -44.10     | -    | 50.02      | 74.00      | 23.98  |
| 15 806.86 <sup>1)</sup> | H     | 54.60    | 38.21       | -41.45     | -    | 51.36      | 74.00      | 22.64  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 806.86 <sup>1)</sup> | H     | 43.89    | 38.21       | -41.45     | 0.25 | 40.90      | 54.00      | 13.10  |

### 802.11a\_Middle Channel (5 280 MHz)


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 10 543.02               | H     | 55.70    | 39.00       | -43.94     | -    | 50.76      | 68.20      | 17.44  |
| 15 809.55 <sup>1)</sup> | H     | 54.70    | 38.22       | -41.45     | -    | 51.47      | 74.00      | 22.53  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 15 809.55 <sup>1)</sup> | H     | 44.03    | 38.22       | -41.45     | 0.25 | 41.05      | 54.00      | 12.95  |

### 802.11a\_Highest Channel (5 320 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 351.45 <sup>1)</sup>  | H     | 63.00    | 33.00       | -27.07     | -    | 68.93      | 74.00      | 5.07   |
| 10 672.58 <sup>1)</sup> | V     | 55.10    | 39.35       | -44.25     | -    | 50.20      | 74.00      | 23.80  |
| 15 990.88 <sup>1)</sup> | H     | 54.40    | 38.20       | -41.27     | -    | 51.33      | 74.00      | 22.67  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 351.45 <sup>1)</sup>  | H     | 43.86    | 33.00       | -27.07     | 0.25 | 50.04      | 54.00      | 3.96   |
| 15 990.88 <sup>1)</sup> | H     | 43.74    | 38.20       | -41.27     | 0.25 | 40.92      | 54.00      | 13.08  |

In order to simplify the report, attached plots were only the lowest margin condition

**802.11a\_Highest Channel (5 320 MHz)**

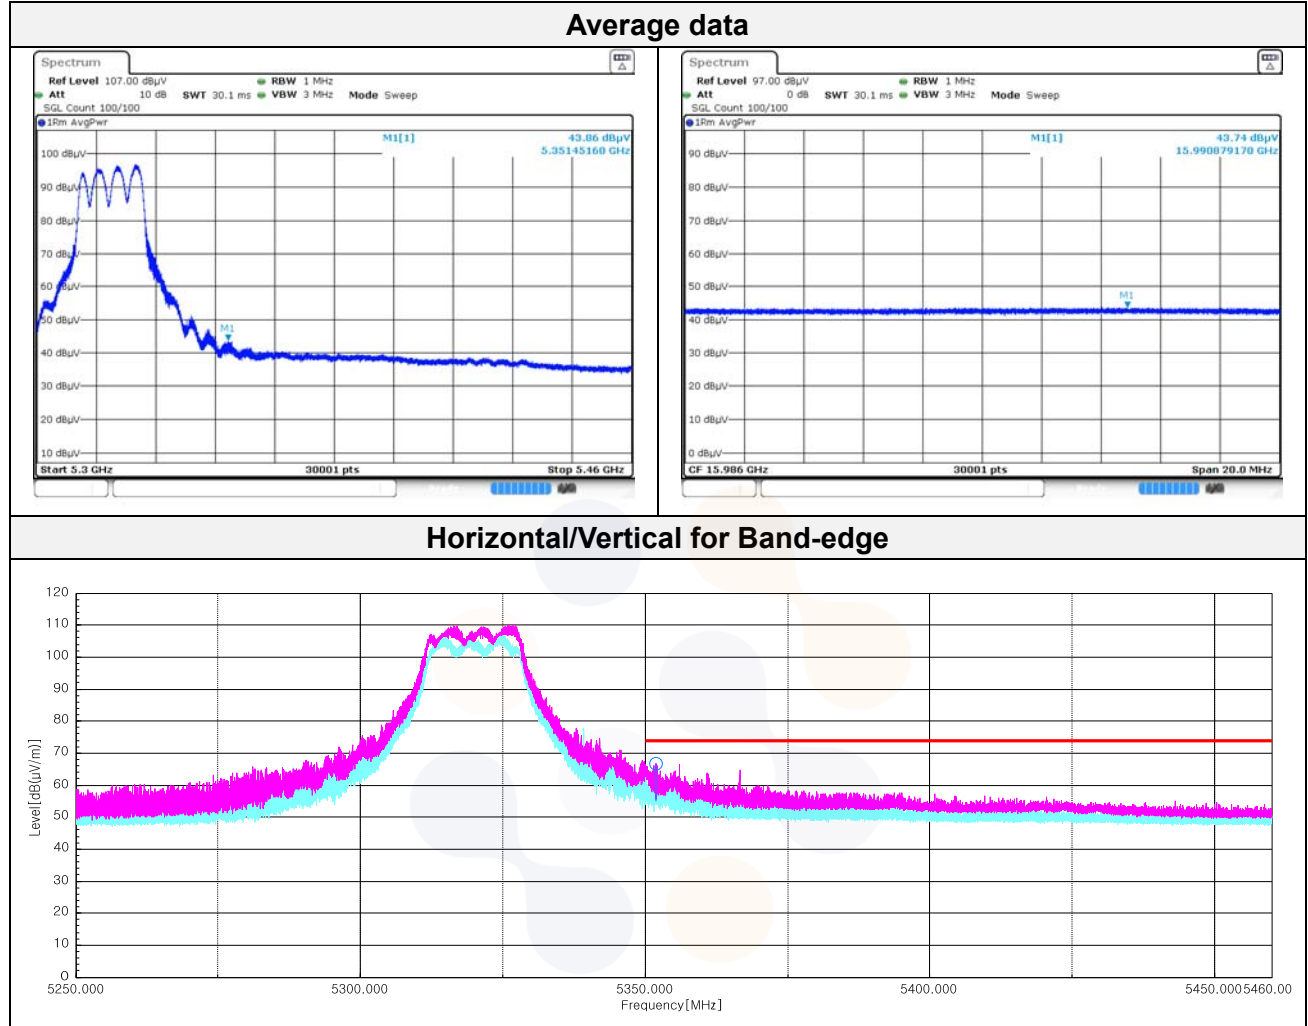

### 802.11n\_HT20\_Lowest Channel (5 260 MHz)

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 427.25                                                      | V     | 55.80    | 39.05       | -43.84     | -    | 51.01      | 68.20      | 17.19  |
| 15 734.12 <sup>1)</sup>                                        | V     | 54.20    | 38.10       | -41.51     | -    | 50.79      | 74.00      | 23.21  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11n\_HT20\_Middle Channel (5 280 MHz)


| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 563.33                                                      | H     | 55.90    | 39.13       | -43.99     | -    | 51.04      | 68.20      | 17.16  |
| 15 900.48 <sup>1)</sup>                                        | V     | 54.10    | 38.20       | -41.36     | -    | 50.94      | 74.00      | 23.06  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11n\_HT20\_Highest Channel (5 320 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 351.09 <sup>1)</sup>  | H     | 56.30    | 33.10       | -27.07     | -    | 62.33      | 74.00      | 11.67  |
| 10 631.18 <sup>1)</sup> | V     | 55.40    | 39.26       | -44.15     | -    | 50.51      | 74.00      | 23.49  |
| 15 997.85 <sup>1)</sup> | V     | 53.80    | 38.20       | -41.26     | -    | 50.74      | 74.00      | 23.26  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 351.09 <sup>1)</sup>  | H     | 39.64    | 33.10       | -27.07     | 0.54 | 46.21      | 54.00      | 7.79   |


## 802.11n\_HT20\_Highest Channel (5 320 MHz)

### Average data

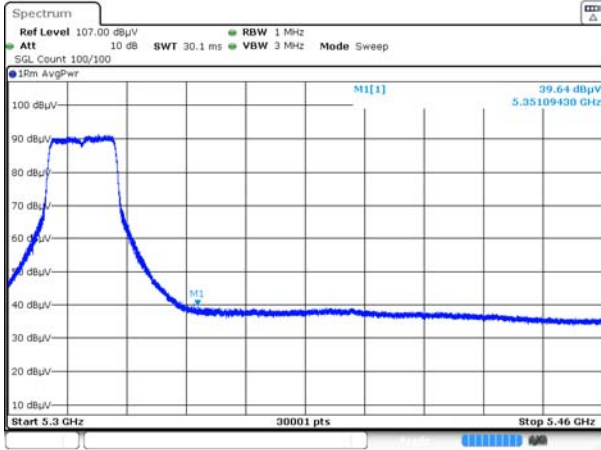

Blank

### Horizontal/Vertical for Band-edge

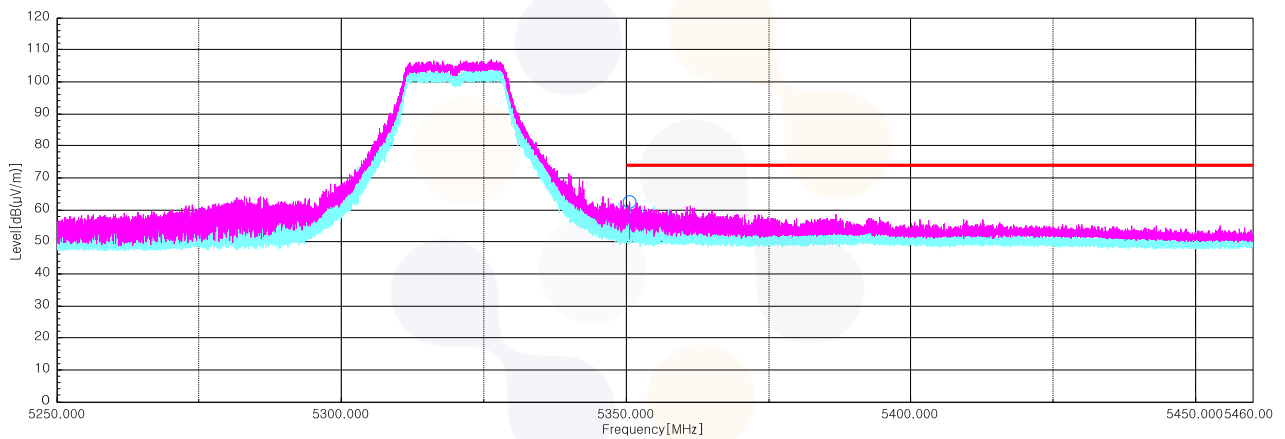

**802.11n\_HT40\_Lowest Channel (5 270 MHz)**



| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 475.93                                                      | H     | 55.80    | 39.00       | -43.84     | -    | 50.96      | 68.20      | 17.24  |
| 15 970.63 <sup>1)</sup>                                        | V     | 54.00    | 38.20       | -41.29     | -    | 50.91      | 74.00      | 23.09  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

**802.11n\_HT40\_Highest Channel (5 310 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.31 <sup>1)</sup>  | H     | 63.00    | 33.10       | -27.07     | -    | 69.03      | 74.00      | 4.97   |
| 10 648.82 <sup>1)</sup> | V     | 54.70    | 39.30       | -44.19     | -    | 49.81      | 74.00      | 24.19  |
| 15 948.77 <sup>1)</sup> | V     | 54.80    | 38.20       | -41.31     | -    | 51.69      | 74.00      | 22.31  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.31 <sup>1)</sup>  | H     | 42.39    | 33.10       | -27.07     | 1.17 | 49.59      | 54.00      | 4.41   |
| 15 948.77 <sup>1)</sup> | V     | 43.79    | 38.20       | -41.31     | 1.17 | 41.85      | 54.00      | 12.15  |

## 802.11n\_HT40\_Highest Channel (5 310 MHz)

### Average data

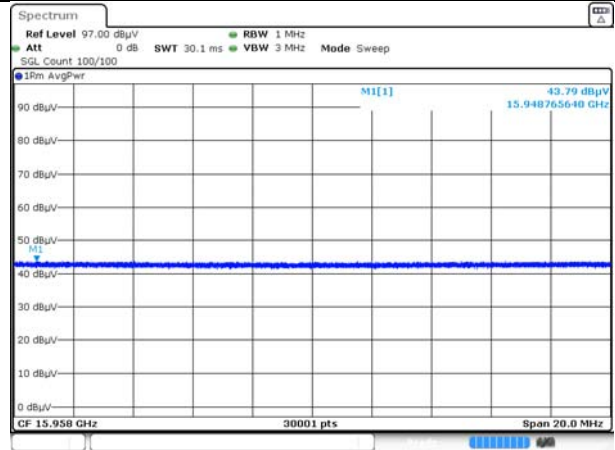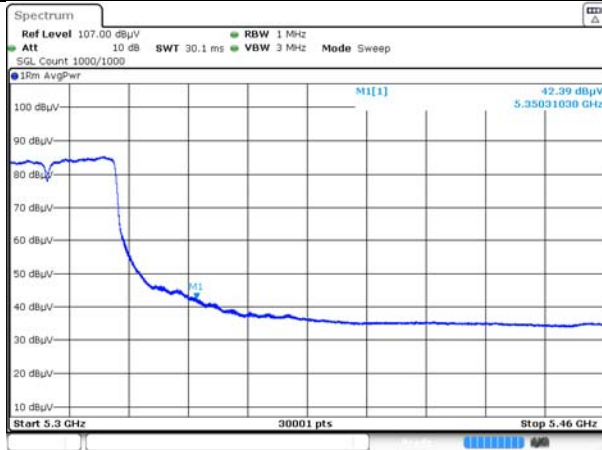

### Horizontal/Vertical for Band-edge

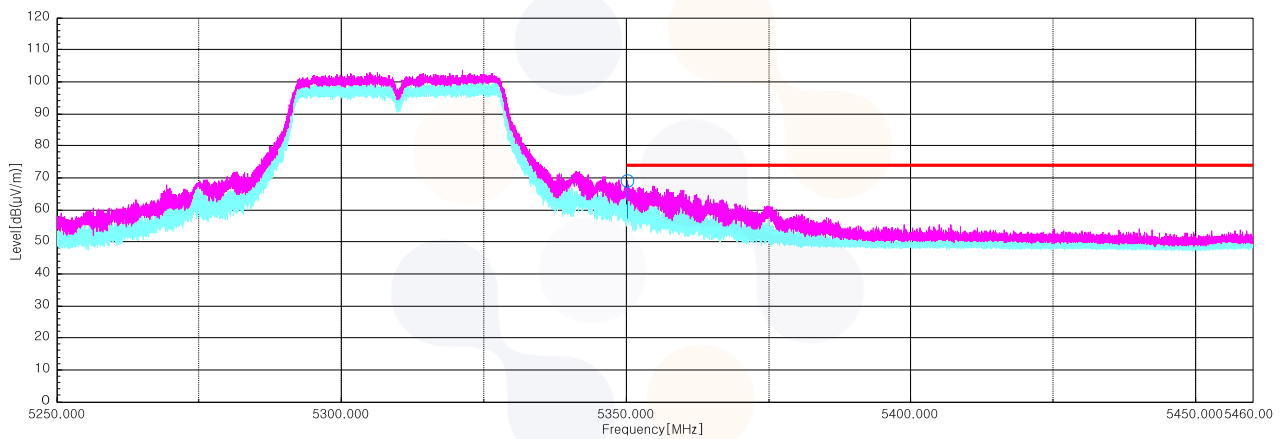

### 802.11ac VHT20\_Lowest Channel (5 260 MHz)

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 407.70                                                      | V     | 56.40    | 39.02       | -43.84     | -    | 51.58      | 68.20      | 16.62  |
| 15 779.35 <sup>1)</sup>                                        | V     | 54.10    | 38.10       | -41.48     | -    | 50.72      | 74.00      | 23.28  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11ac VHT20\_Middle Channel (5 280 MHz)



| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 578.28                                                      | V     | 55.90    | 39.16       | -44.02     | -    | 51.04      | 68.20      | 17.16  |
| 15 793.15 <sup>1)</sup>                                        | V     | 54.10    | 38.10       | -41.47     | -    | 50.73      | 74.00      | 23.27  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11ac VHT20\_Highest Channel (5 320 MHz)


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.13 <sup>1)</sup>  | H     | 59.00    | 33.00       | -27.07     | -    | 64.93      | 74.00      | 9.07   |
| 10 641.15 <sup>1)</sup> | V     | 55.10    | 39.28       | -44.17     | -    | 50.21      | 74.00      | 23.79  |
| 15 965.71 <sup>1)</sup> | H     | 54.20    | 38.20       | -41.29     | -    | 51.11      | 74.00      | 22.89  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.13 <sup>1)</sup>  | H     | 43.39    | 33.00       | -27.07     | 0.64 | 49.96      | 54.00      | 4.04   |
| 15 965.71 <sup>1)</sup> | H     | 43.90    | 38.20       | -41.29     | 0.64 | 41.45      | 54.00      | 12.55  |

**802.11ac VHT20\_Highest Channel (5 320 MHz)**

**Average data**

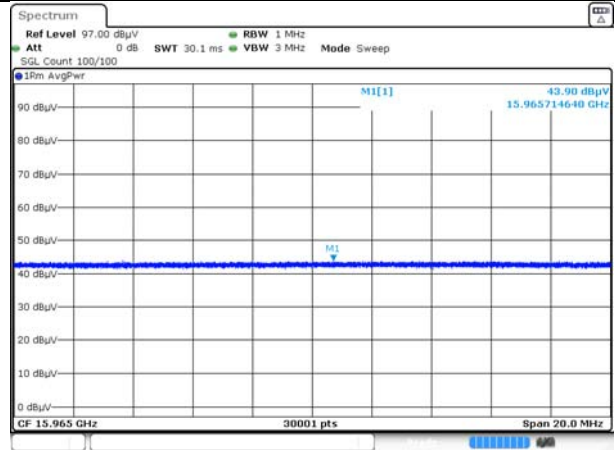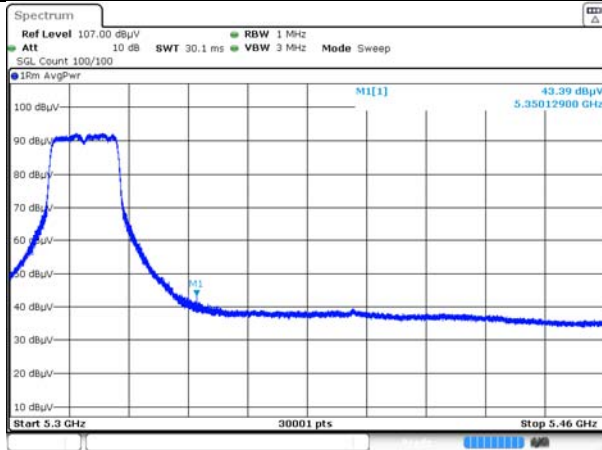

**Horizontal/Vertical for Band-edge**

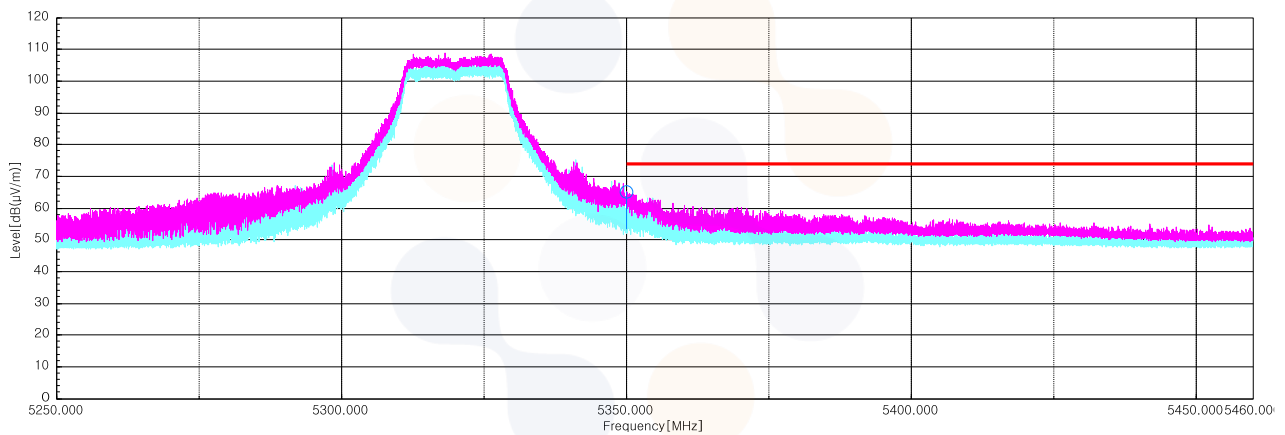

**802.11ac VHT40\_Lowest Channel (5 270 MHz)**



| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 10 495.10                                                      | H     | 55.50    | 39.00       | -43.84     | -    | 50.66      | 68.20      | 17.54  |
| 15 828.03 <sup>1)</sup>                                        | H     | 53.70    | 38.26       | -41.43     | -    | 50.53      | 74.00      | 23.47  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

**802.11ac VHT40\_Highest Channel (5 310 MHz)**


| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.09 <sup>1)</sup>  | H     | 64.50    | 33.00       | -27.07     | -    | 70.43      | 74.00      | 3.57   |
| 10 640.38 <sup>1)</sup> | V     | 55.10    | 39.28       | -44.17     | -    | 50.21      | 74.00      | 23.79  |
| 16 011.58 <sup>1)</sup> | H     | 54.70    | 38.20       | -41.29     | -    | 51.61      | 74.00      | 22.39  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.09 <sup>1)</sup>  | H     | 44.57    | 33.00       | -27.07     | 0.90 | 51.40      | 54.00      | 2.60   |
| 16 011.58 <sup>1)</sup> | H     | 43.74    | 38.20       | -41.29     | 0.90 | 41.55      | 54.00      | 12.45  |

**802.11ac VHT40\_Highest Channel (5 310 MHz)**

**Average data**

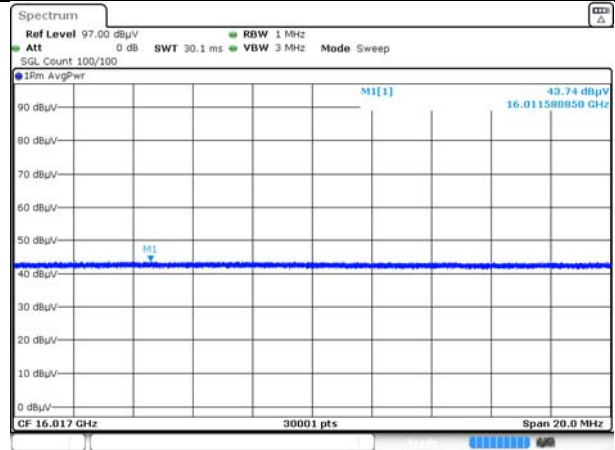
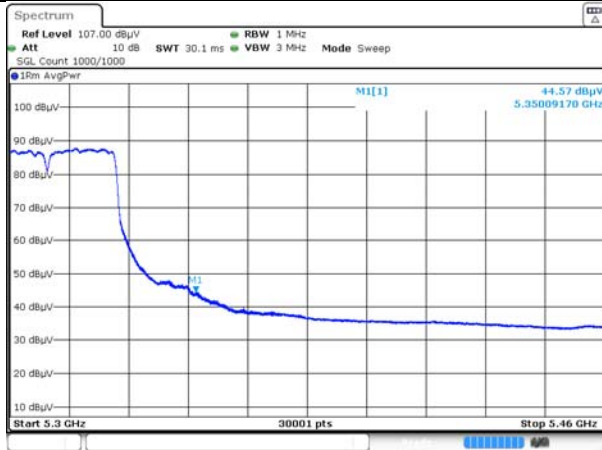


**Horizontal/Vertical for Band-edge**

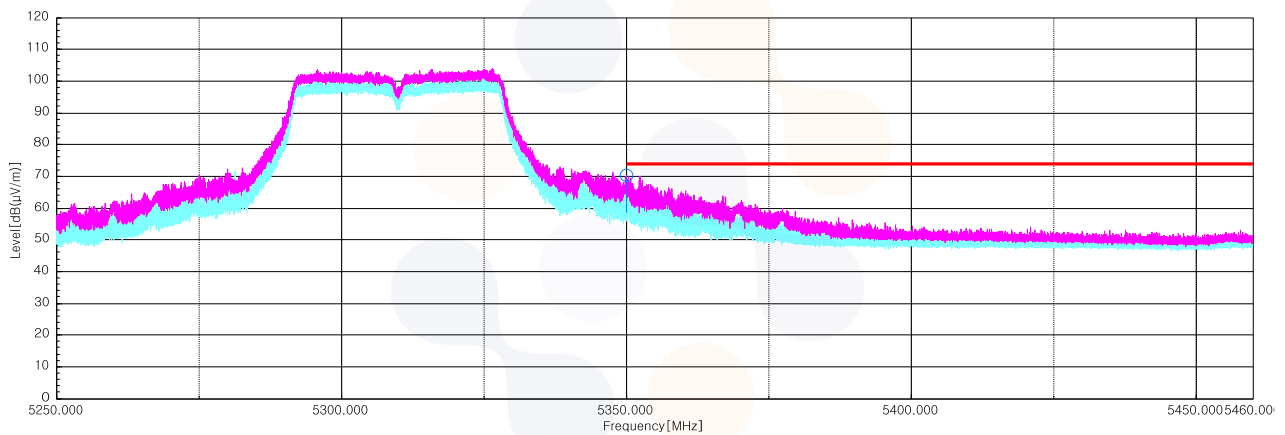

### 802.11ac VHT80\_Middle Channel (5 290 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 350.19 <sup>1)</sup>  | H     | 65.70    | 33.00       | -27.07     | -    | 71.63      | 74.00      | 2.37   |
| 10 684.85 <sup>1)</sup> | V     | 55.30    | 39.37       | -44.28     | -    | 50.39      | 74.00      | 23.61  |
| 15 941.50 <sup>1)</sup> | V     | 53.90    | 38.20       | -41.32     | -    | 50.78      | 74.00      | 23.22  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 350.19 <sup>1)</sup>  | H     | 43.49    | 33.00       | -27.07     | 1.87 | 51.29      | 54.00      | 2.71   |

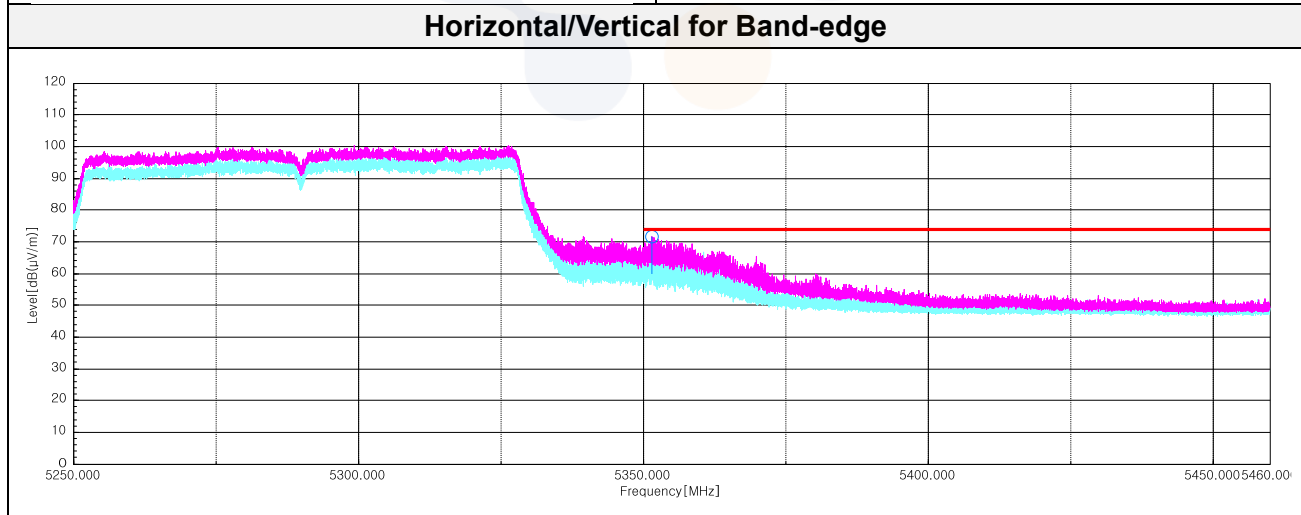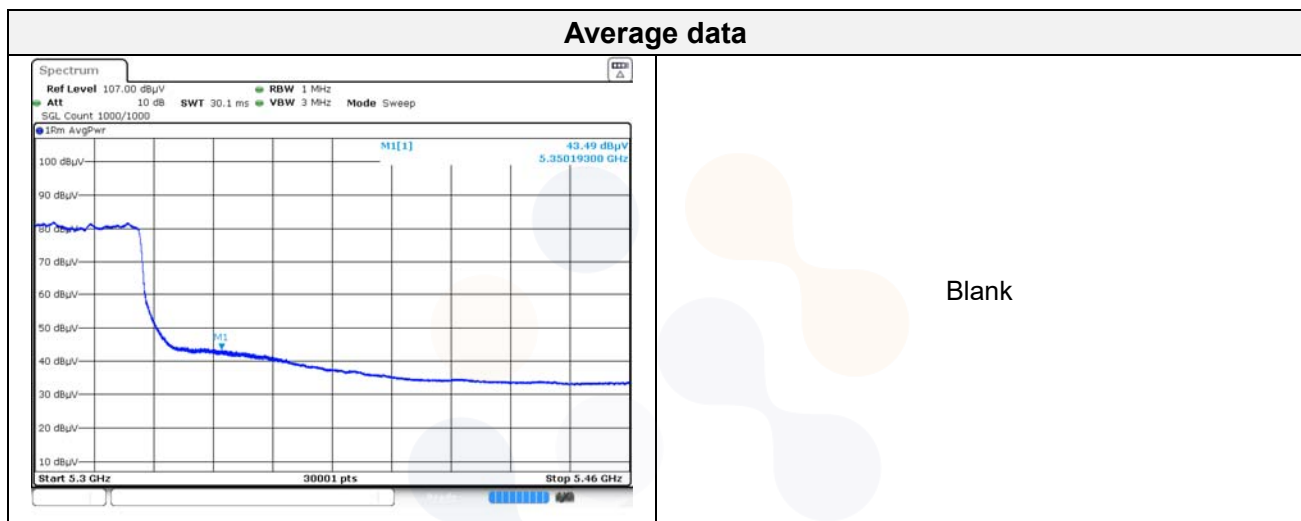


### Plot of Harmonics and Spurious Emissions


In order to simplify the report, attached plots were only the lowest margin condition

#### 802.11ac VHT80 UNII-2A\_2TX MIMO\_ Middle Channel (5 290 MHz)


##### Horizontal/Vertical for 1 GHz ~ 6.5 GHz

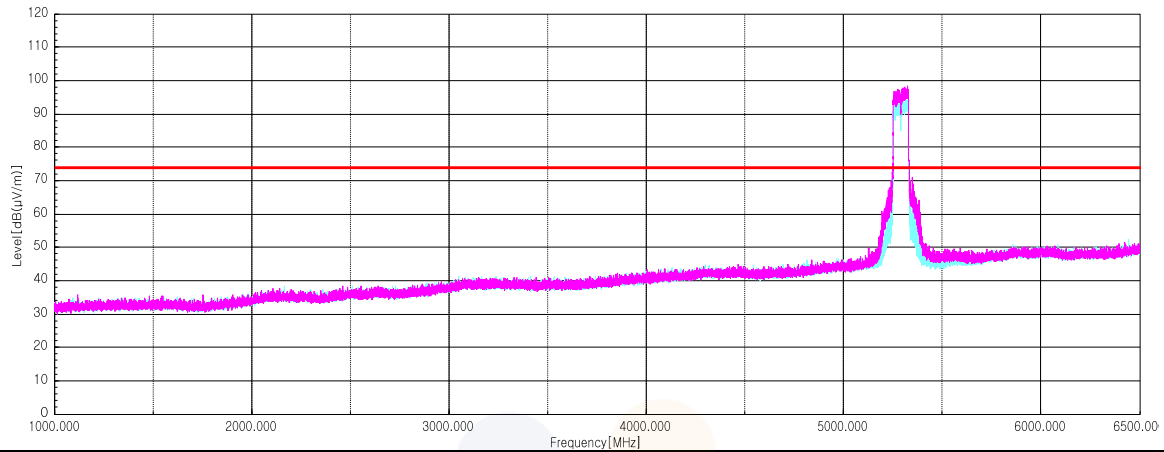

##### Horizontal/Vertical for 6.5 GHz ~ 18 GHz

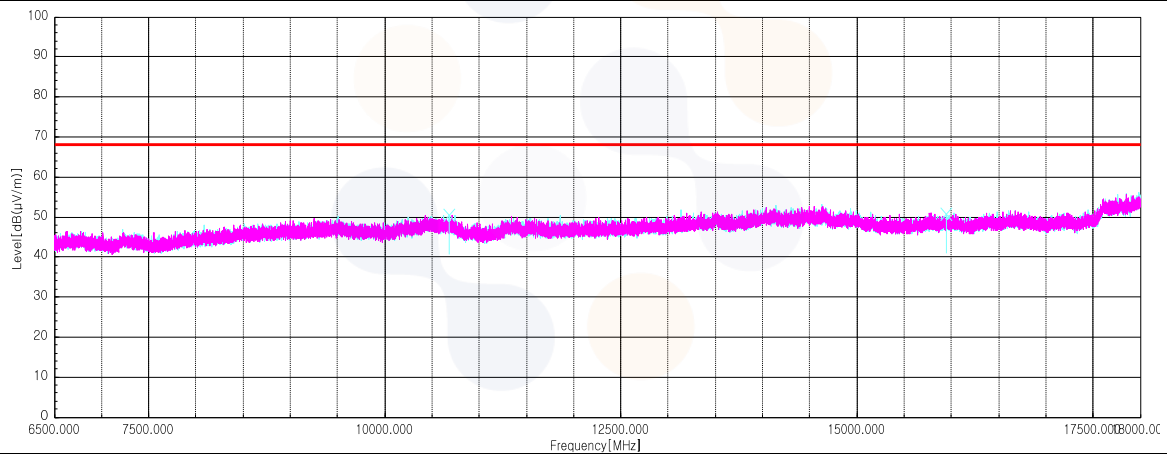

##### Horizontal/Vertical for 18 GHz ~ 40 GHz

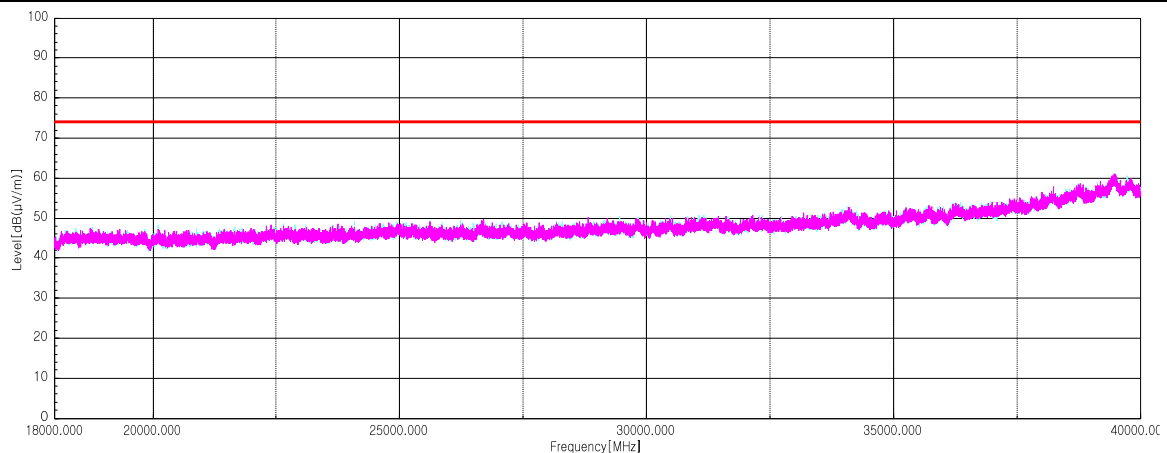

## UNII-2C SISO

### 802.11a\_Lowest Channel (5 500 MHz)

| Frequency               | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|-------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                   | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>        |       |          |             |            |      |            |            |        |
| 5 454.84 <sup>1)</sup>  | H     | 56.00    | 33.00       | -26.75     | -    | 62.25      | 74.00      | 11.75  |
| 10 982.32 <sup>1)</sup> | H     | 53.90    | 39.14       | -43.82     | -    | 49.22      | 74.00      | 24.78  |
| 16 565.57               | V     | 55.70    | 38.10       | -41.45     | -    | 52.35      | 68.20      | 15.85  |
| <b>Average Data</b>     |       |          |             |            |      |            |            |        |
| 5 454.84 <sup>1)</sup>  | H     | 40.40    | 33.00       | -26.75     | 0.27 | 46.92      | 54.00      | 7.08   |

### 802.11a\_Middle Channel (5 600 MHz)

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 11 252.57 <sup>1)</sup>                                        | H     | 53.50    | 39.10       | -43.51     | -    | 49.09      | 74.00      | 24.91  |
| 16 784.07                                                      | H     | 55.90    | 38.03       | -41.75     | -    | 52.18      | 68.20      | 16.02  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |

### 802.11a\_Highest Channel (5 700 MHz)

| Frequency                                                      | Pol.  | Reading  | Ant. Factor | Amp.+Cable | DCF  | Result     | Limit      | Margin |
|----------------------------------------------------------------|-------|----------|-------------|------------|------|------------|------------|--------|
| (MHz)                                                          | (V/H) | (dB(μV)) | (dB)        | (dB)       | (dB) | (dB(μV/m)) | (dB(μV/m)) | (dB)   |
| <b>Peak data</b>                                               |       |          |             |            |      |            |            |        |
| 5 725.75                                                       | H     | 55.70    | 33.75       | -26.66     | -    | 62.79      | 68.20      | 5.41   |
| 11 387.12 <sup>1)</sup>                                        | V     | 53.40    | 39.20       | -43.09     | -    | 49.51      | 74.00      | 24.49  |
| 17 048.95                                                      | H     | 55.20    | 38.10       | -42.21     | -    | 51.09      | 68.20      | 17.11  |
| <b>Average Data</b>                                            |       |          |             |            |      |            |            |        |
| No spurious emissions were detected within 20 dB of the limit. |       |          |             |            |      |            |            |        |