



Appendix B: Test Results of Bluetooth BR & EDR

APPENDIX B: TEST RESULTS OF BLUETOOTH BR & EDR	1
APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH	2
APPENDIX B.2: TEST RESULTS OF 20dB BANDWIDTH	5
APPENDIX B.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
APPENDIX B.4: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	9
APPENDIX B.5: TEST RESULTS OF TIME OF OCCUPANCY	10
APPENDIX B.6: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH	15
<i>Band Edge</i>	15
<i>Conducted Spurious Emission</i>	19
APPENDIX B.7: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	26
30 MHz - 1GHz	26
1GHz - 18GHz	28
APPENDIX B.8: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	40

Appendix B.1: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.85172	2401.7029	2402.5546	---	PASS
		2441	0.87932	2440.6887	2441.5680	---	PASS
		2480	0.85611	2479.7057	2480.5618	---	PASS
3DH5	Ant1	2402	1.2028	2401.5214	2402.7242	---	PASS
		2441	1.1981	2440.5301	2441.7282	---	PASS
		2480	1.1886	2479.5383	2480.7269	---	PASS

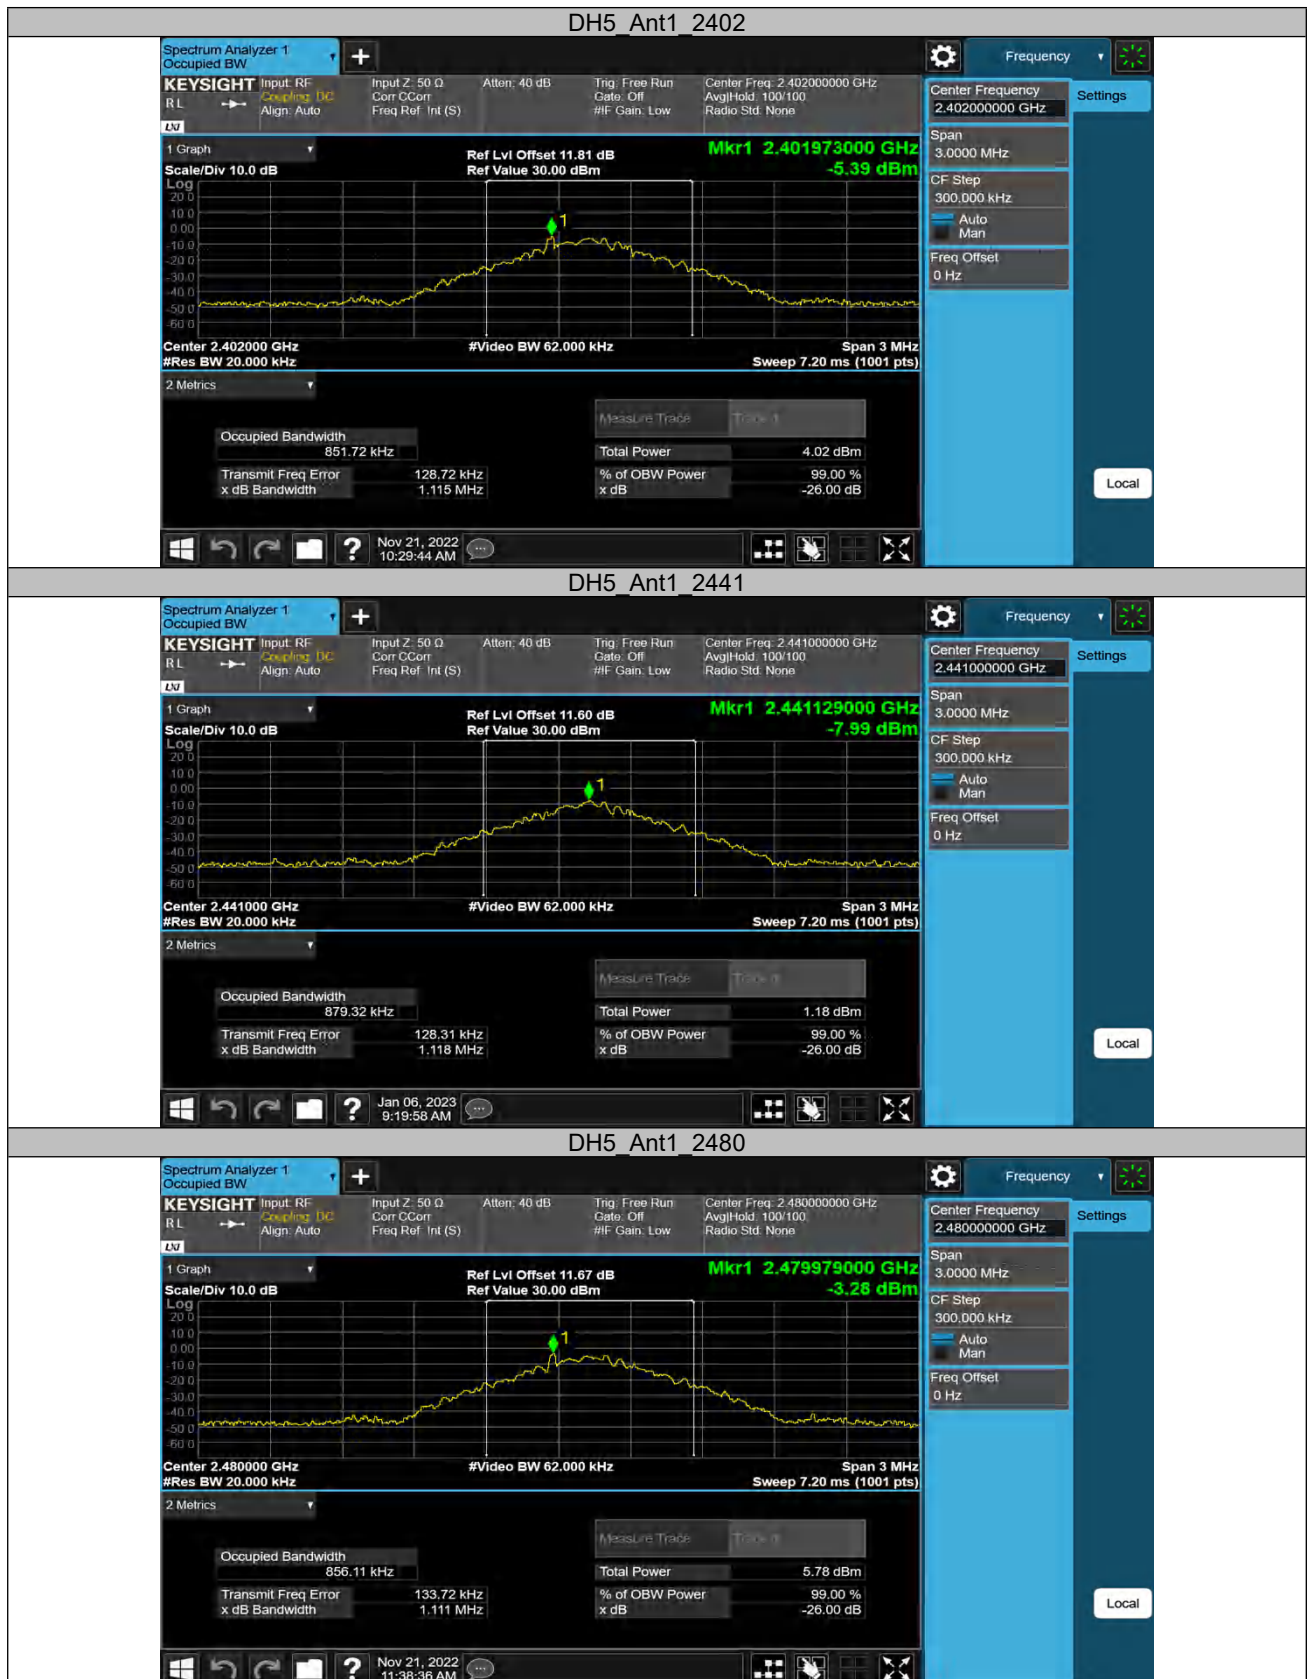


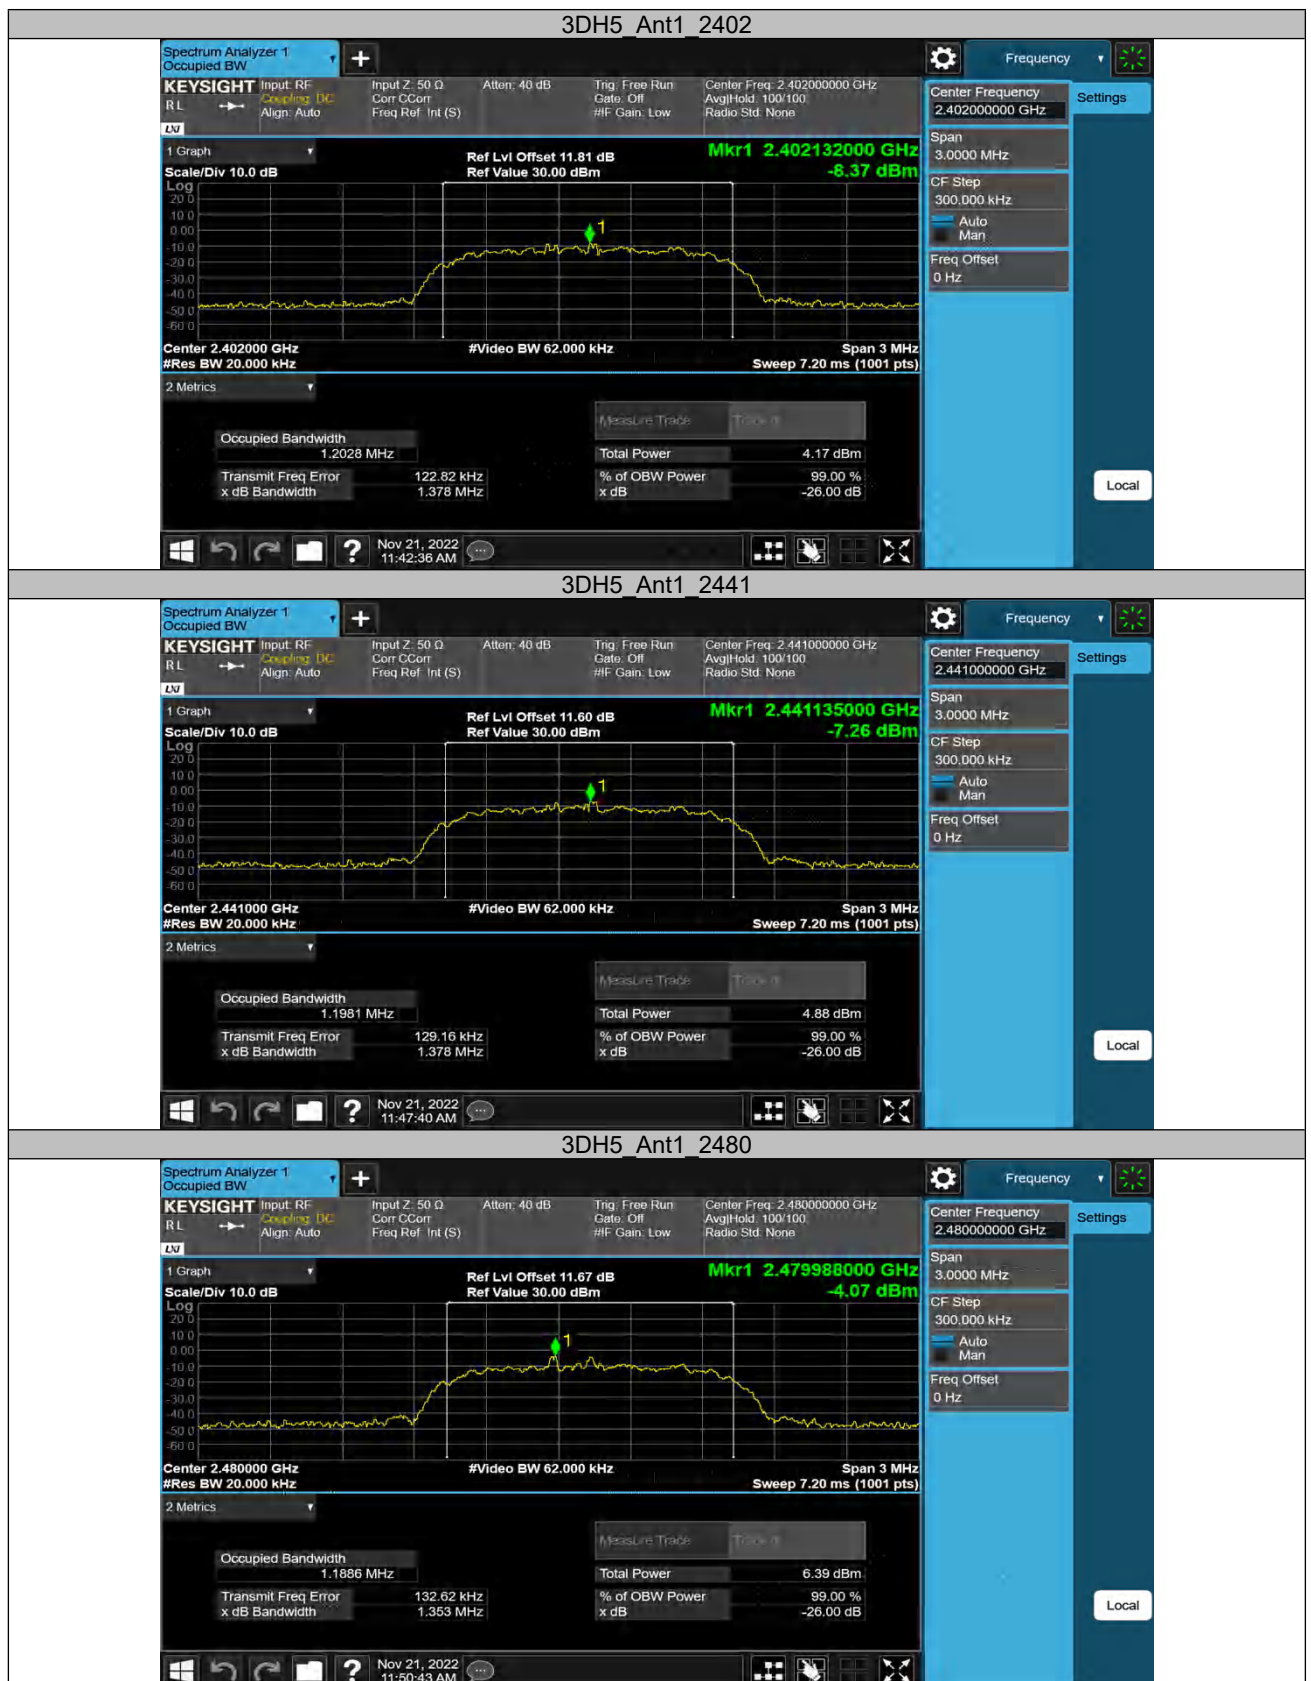

Appendix B.2: Test Results of 20dB Bandwidth

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.882	2401.679	2402.561	---	PASS
		2441	0.885	2440.679	2441.564	---	PASS
		2480	0.942	2479.679	2480.621	---	PASS
3DH5	Ant1	2402	1.296	2401.481	2402.777	---	PASS
		2441	1.272	2440.490	2441.762	---	PASS
		2480	1.269	2479.496	2480.765	---	PASS



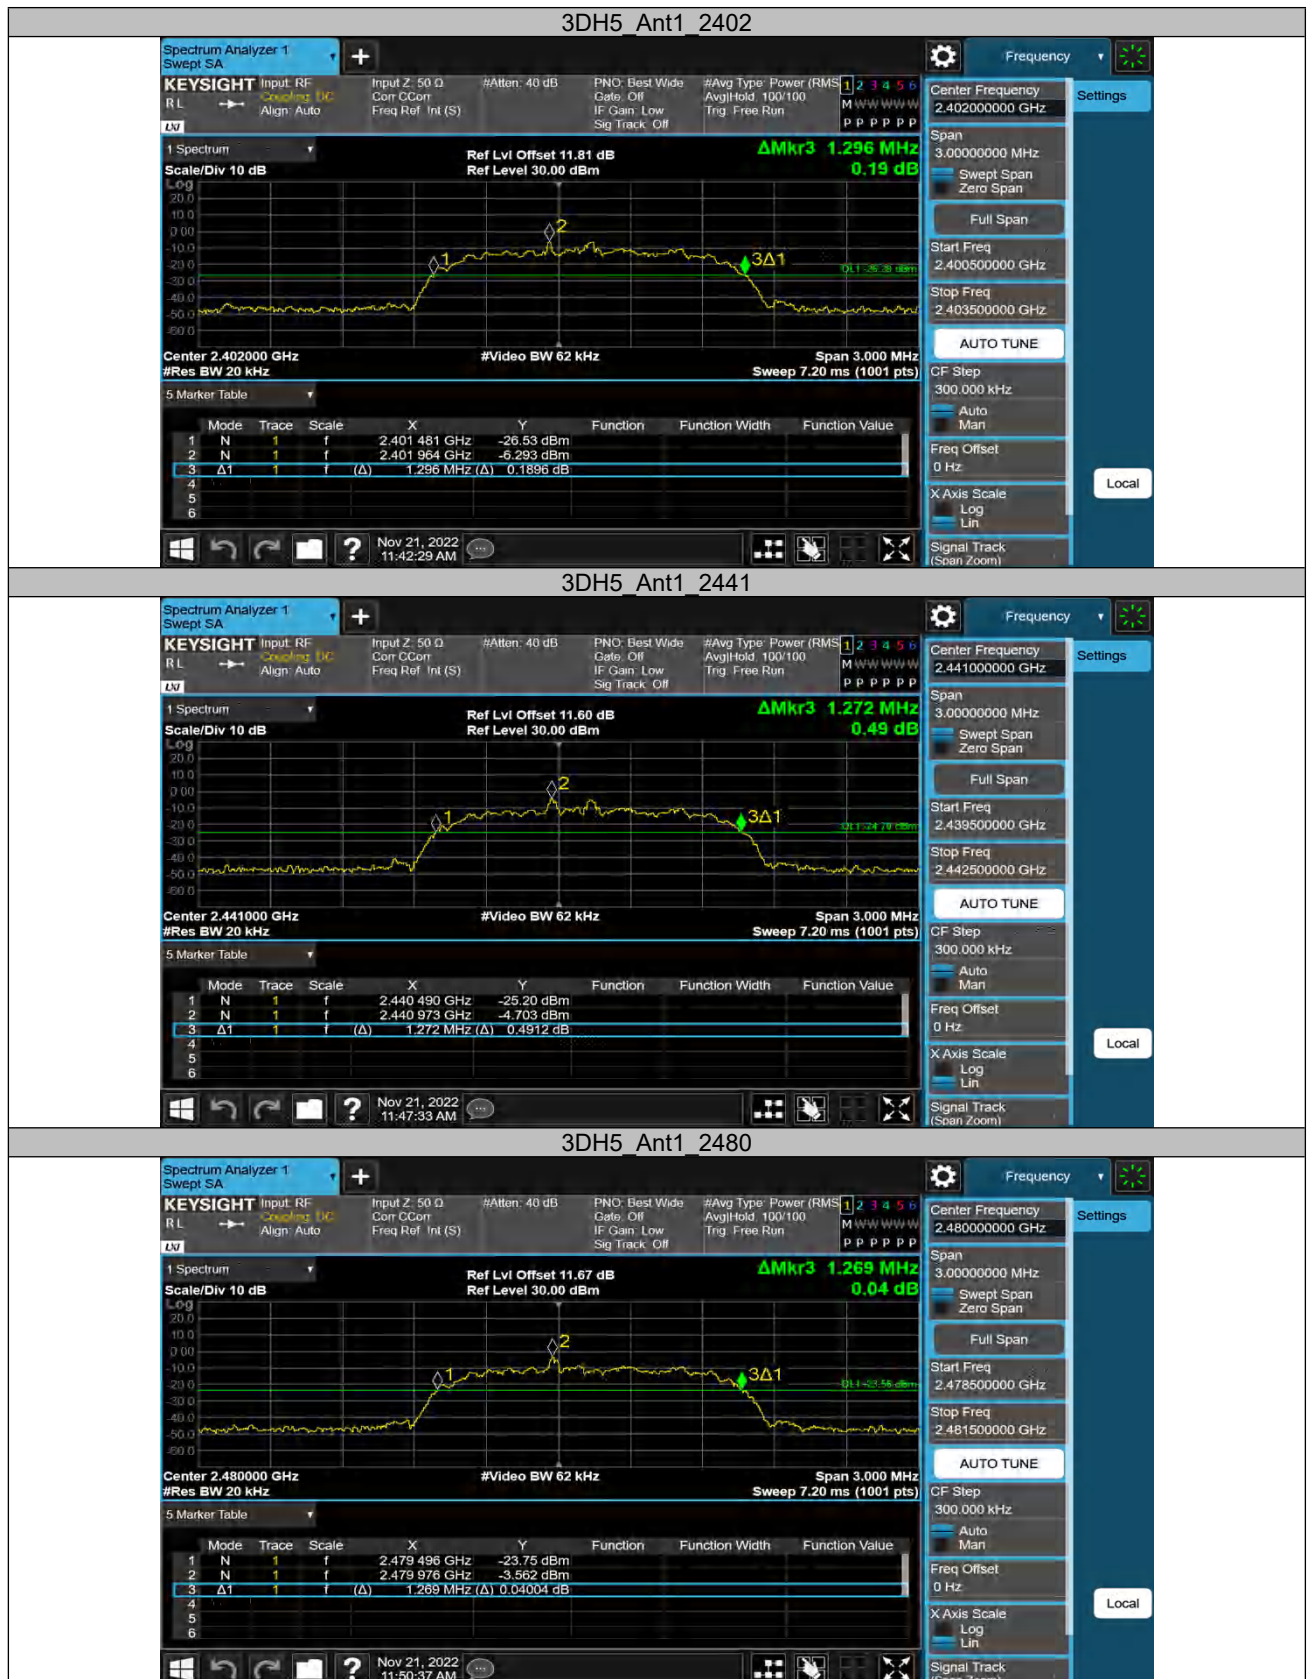

Appendix B.3: Test Results of Carrier Frequency Separation

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.996	≥0.942	PASS
3DH5	Ant1	Hop	0.984	≥0.864	PASS




Appendix B.4: Test Results of Number of Hopping Frequency


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS



Appendix B.5: Test Results of Time of Occupancy


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.370	3	0.001	≤0.4	PASS
DH3	Ant1	Hop	1.678	4	0.007	≤0.4	PASS
DH5	Ant1	Hop	2.926	3	0.009	≤0.4	PASS
3DH1	Ant1	Hop	0.360	3	0.001	≤0.4	PASS
3DH3	Ant1	Hop	2.860	3	0.009	≤0.4	PASS
3DH5	Ant1	Hop	2.870	3	0.009	≤0.4	PASS

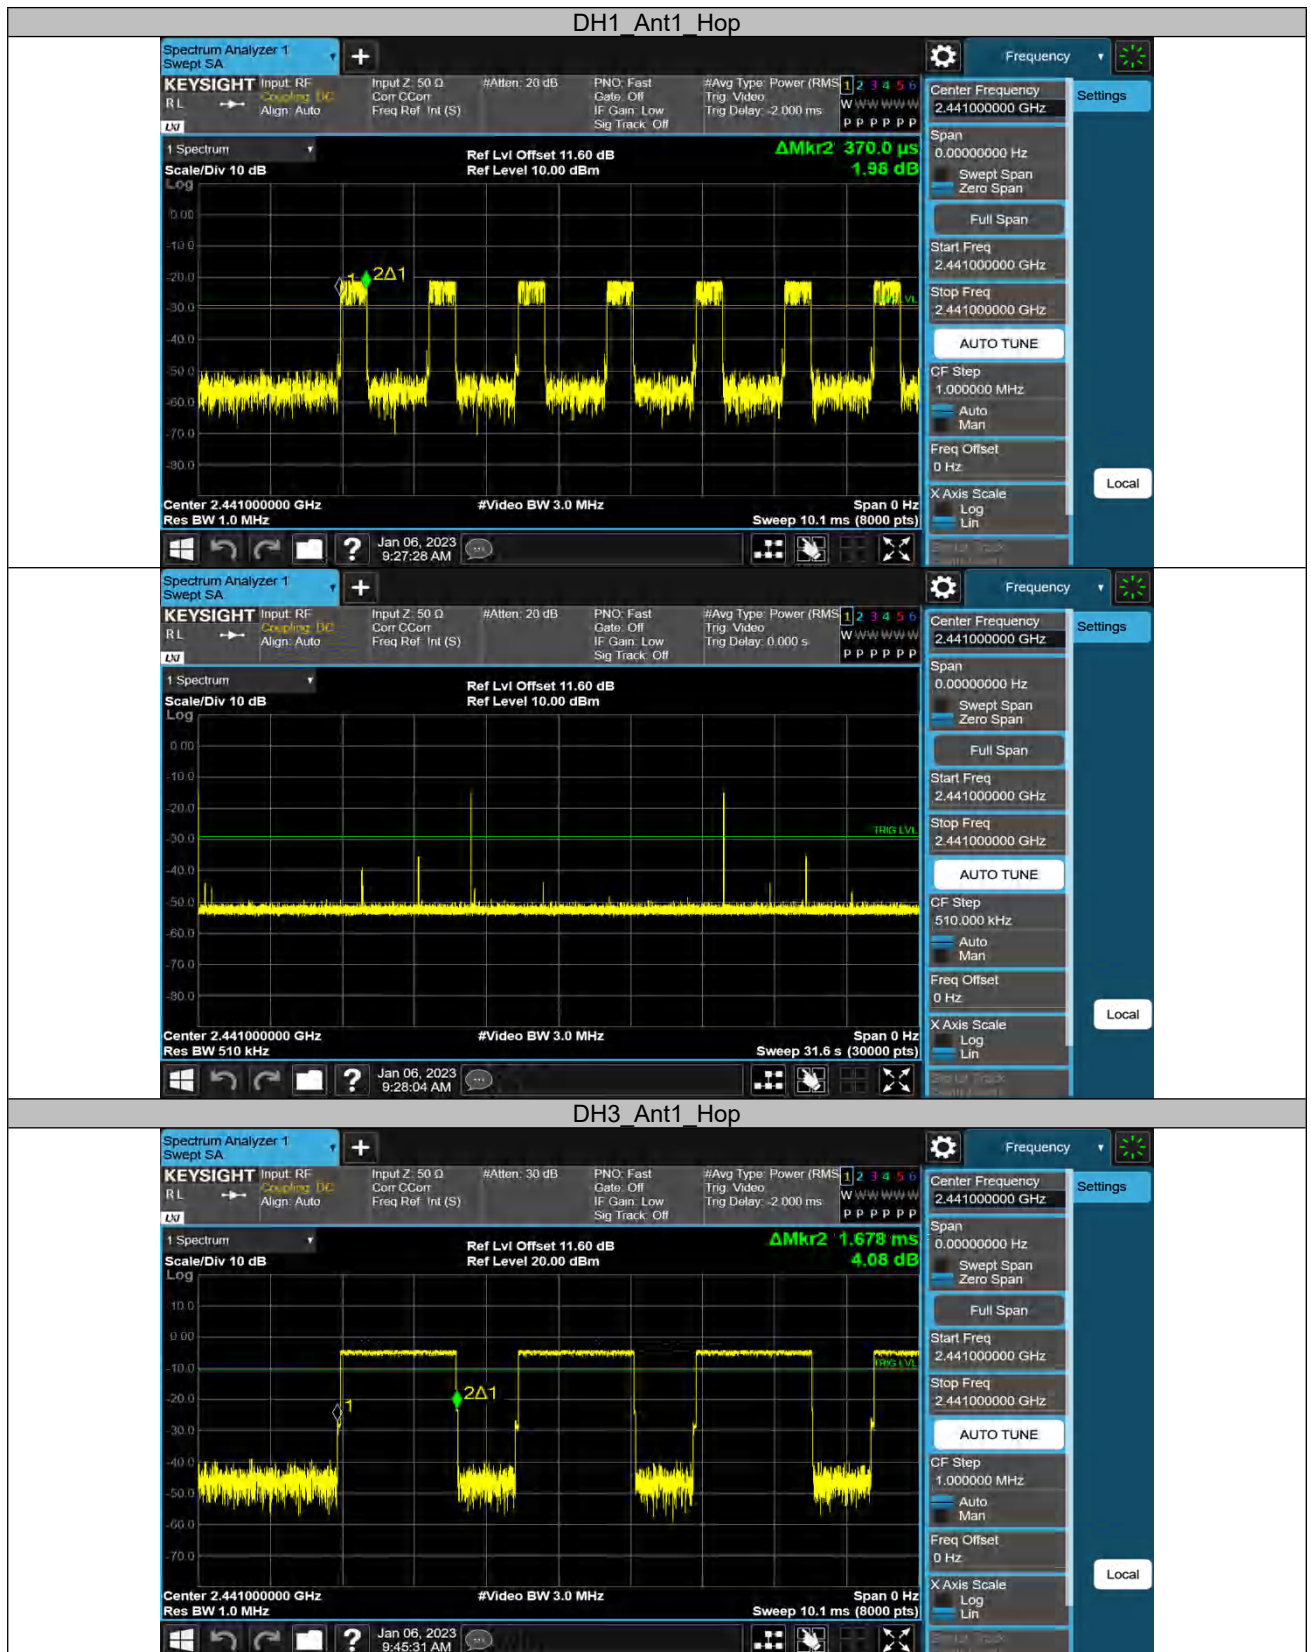


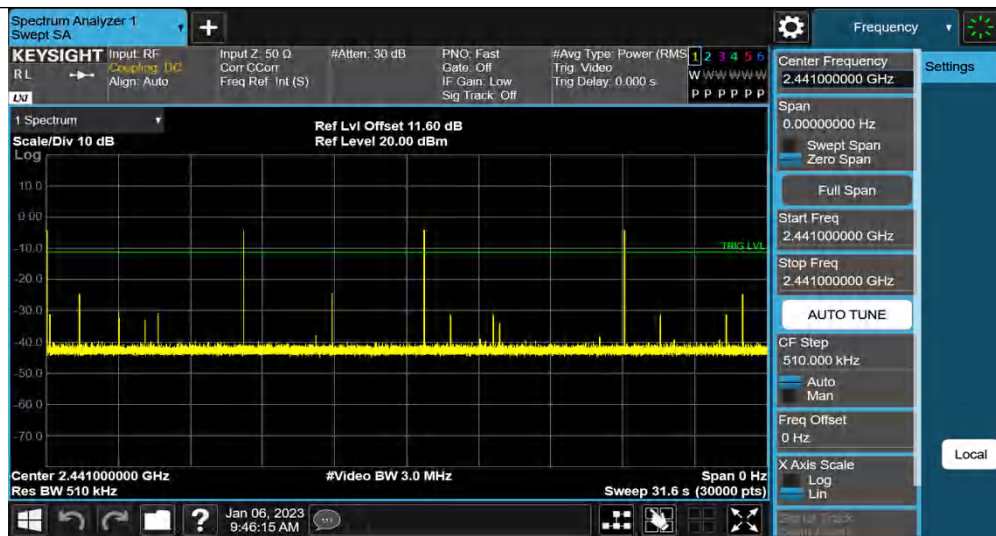

DH5 Ant1 Hop



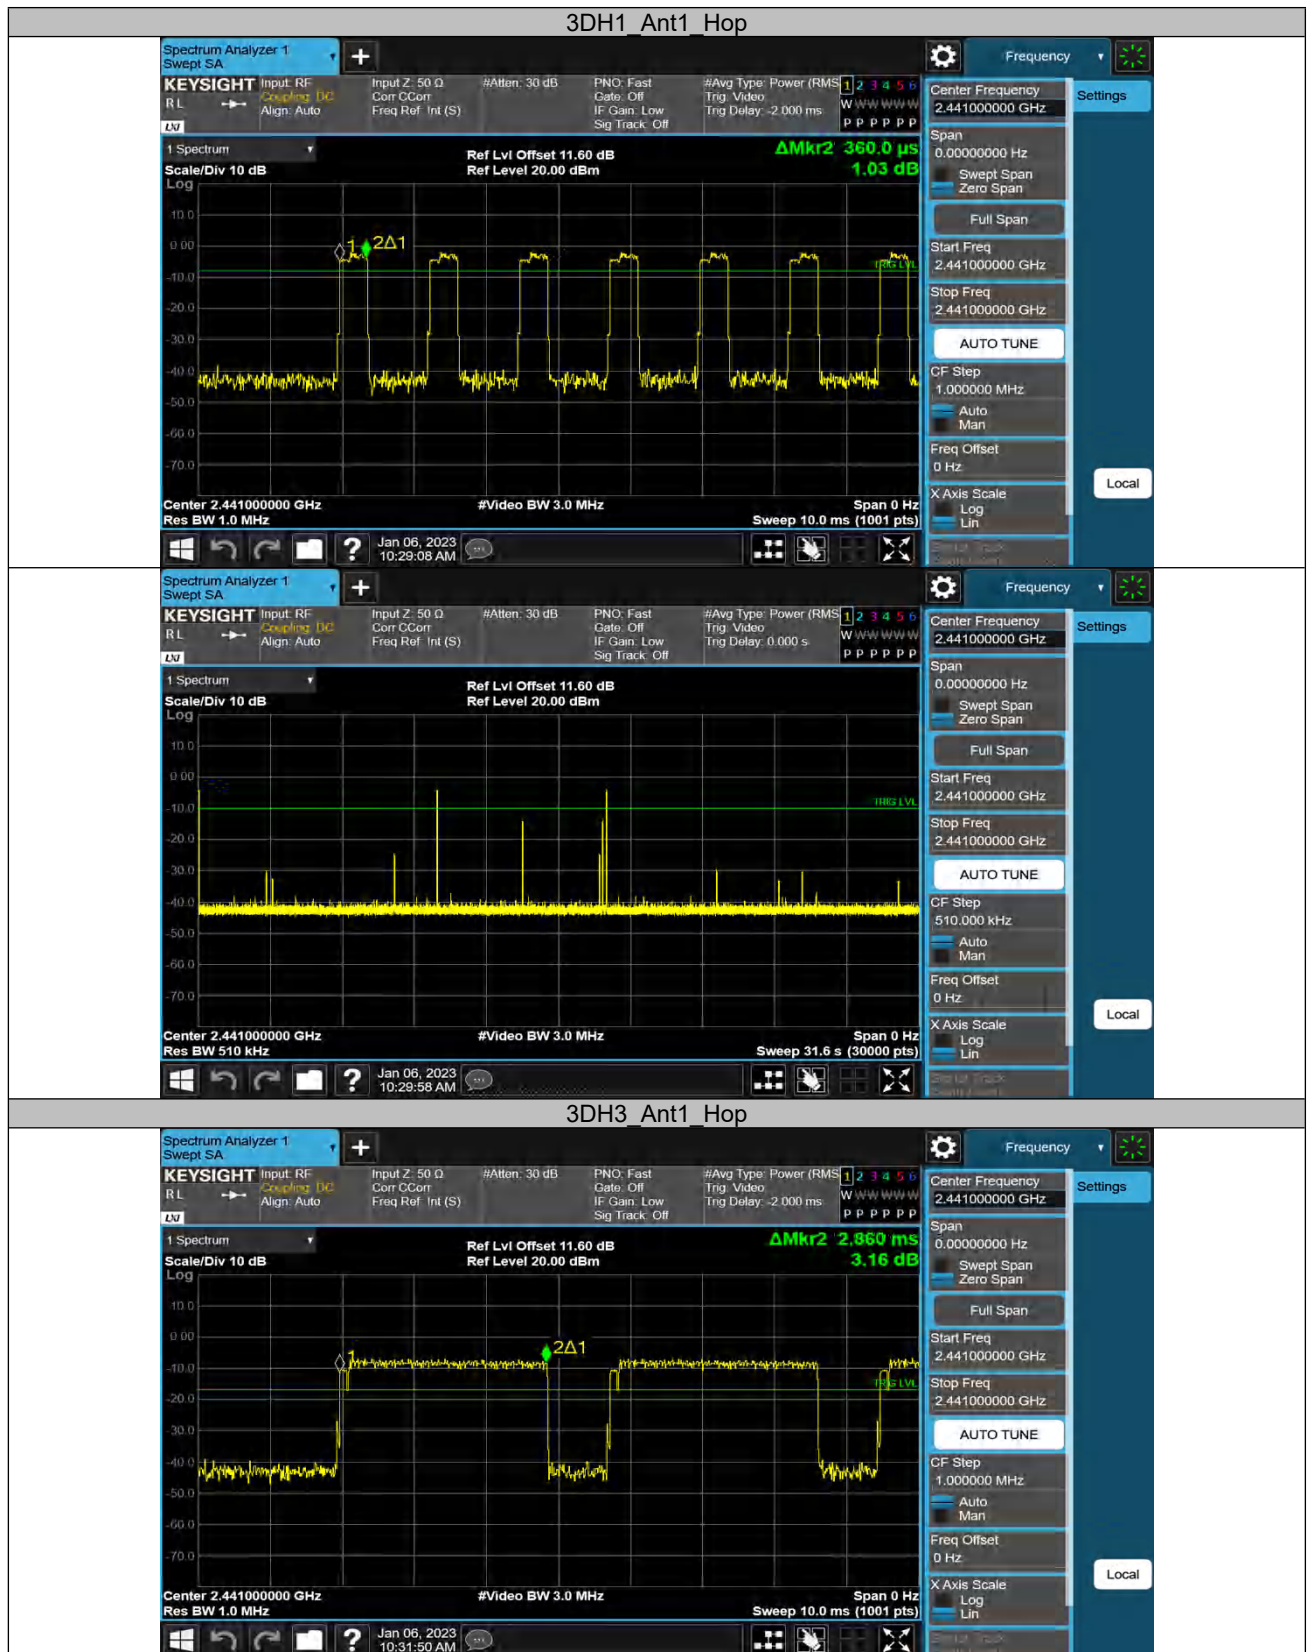

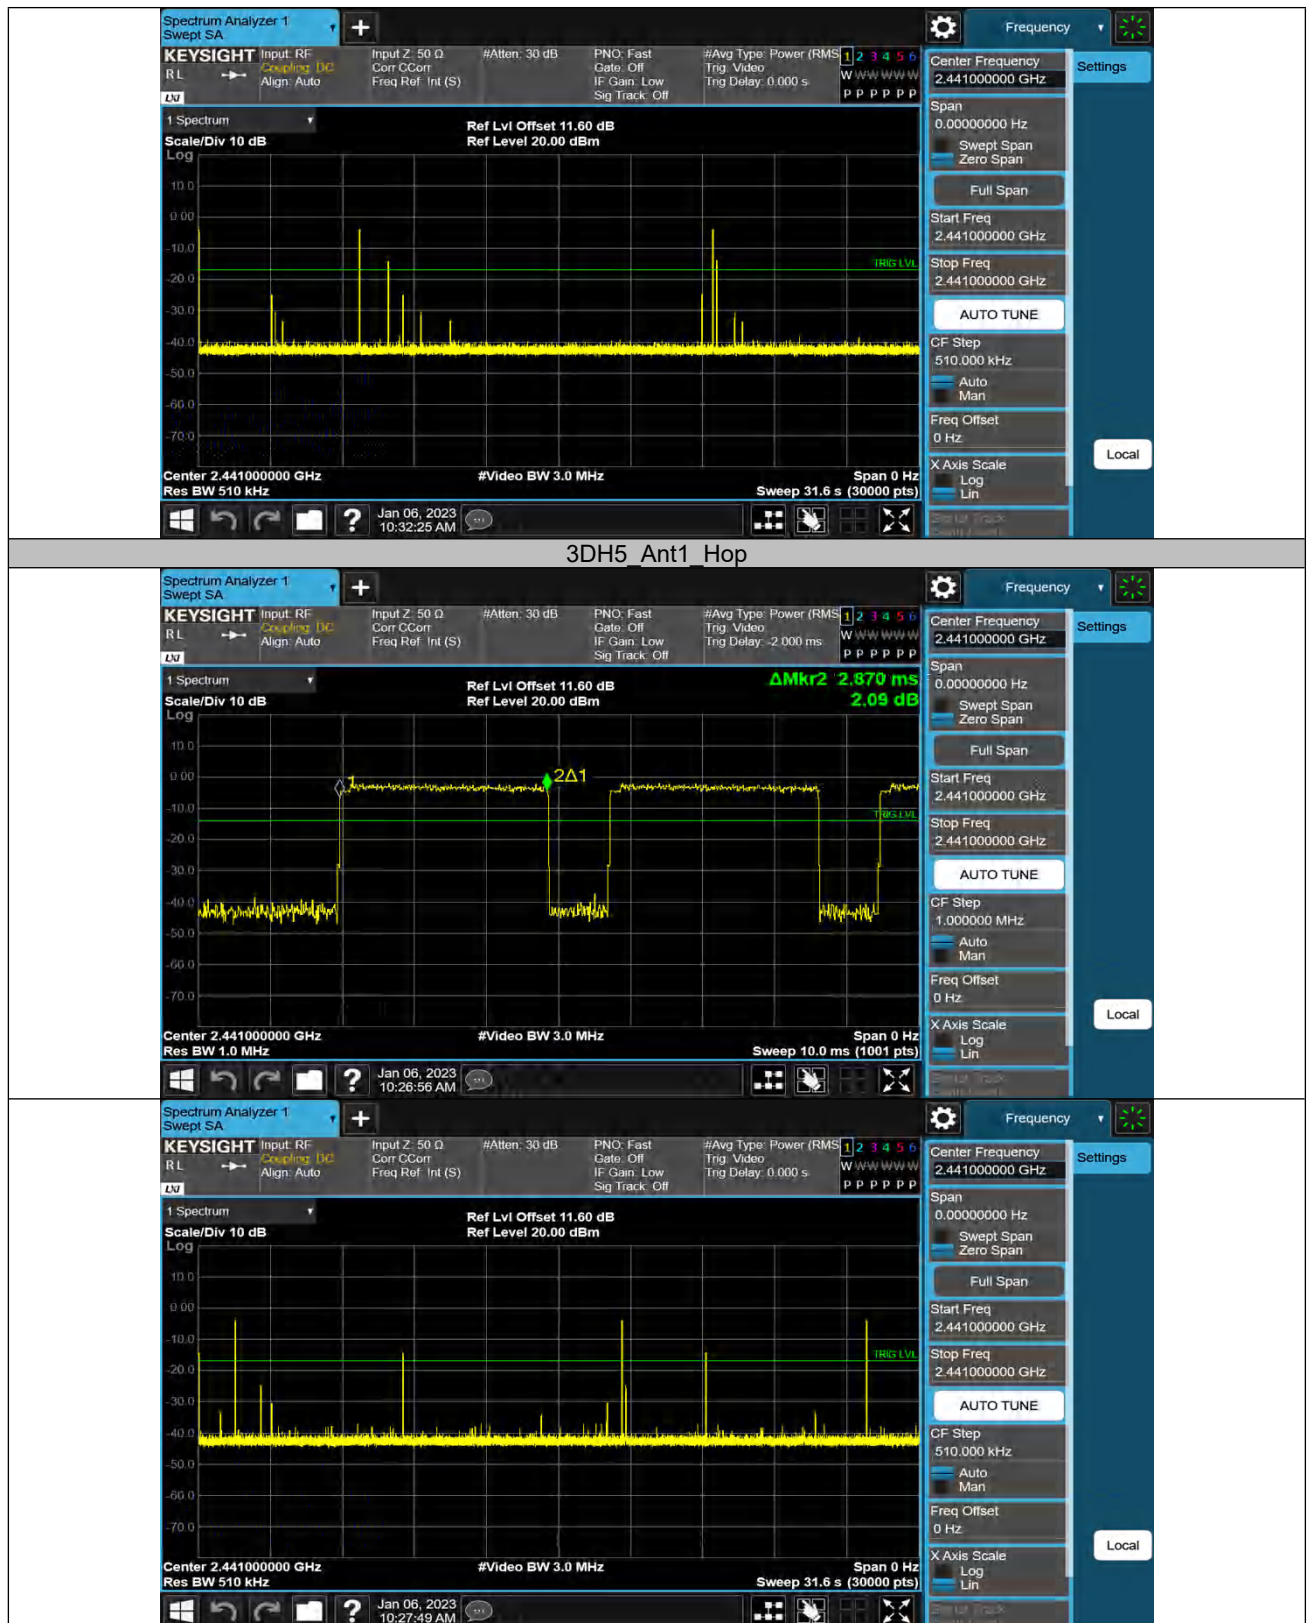


Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Band Edge

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	2.48	-36.11	≤-17.53	PASS
			Hop_2402	1.87	-39.00	≤-18.13	PASS
		High	2480	3.21	-36.00	≤-16.79	PASS
			Hop_2480	3.00	-36.07	≤-17.00	PASS
3DH5	Ant1	Low	2402	2.48	-36.11	≤-17.53	PASS
			Hop_2402	-1.14	-42.20	≤-21.14	PASS
		High	2480	2.35	-32.48	≤-17.65	PASS
			Hop_2480	-1.63	-39.32	≤-21.63	PASS

DH5 Ant1 Low 2402

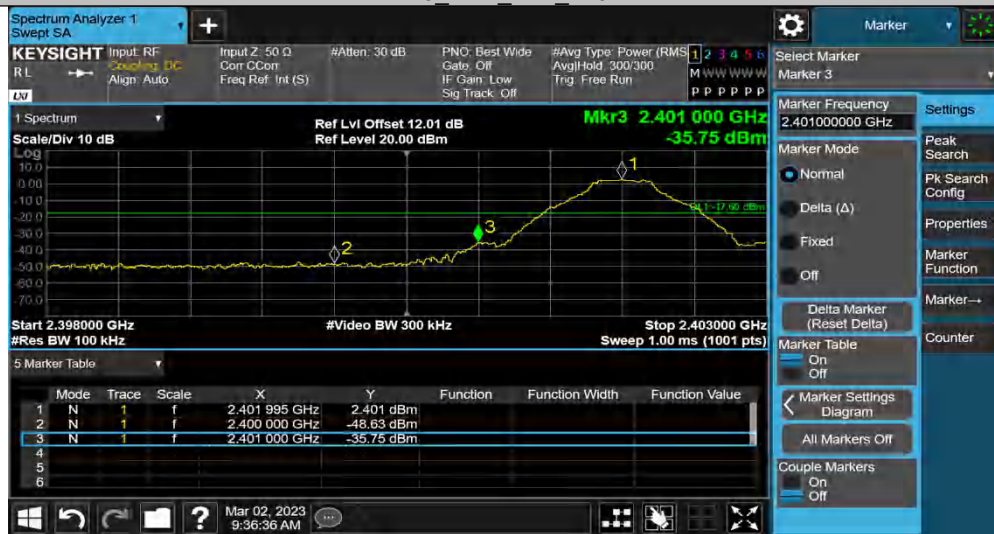


DH5 Ant1 High 2480

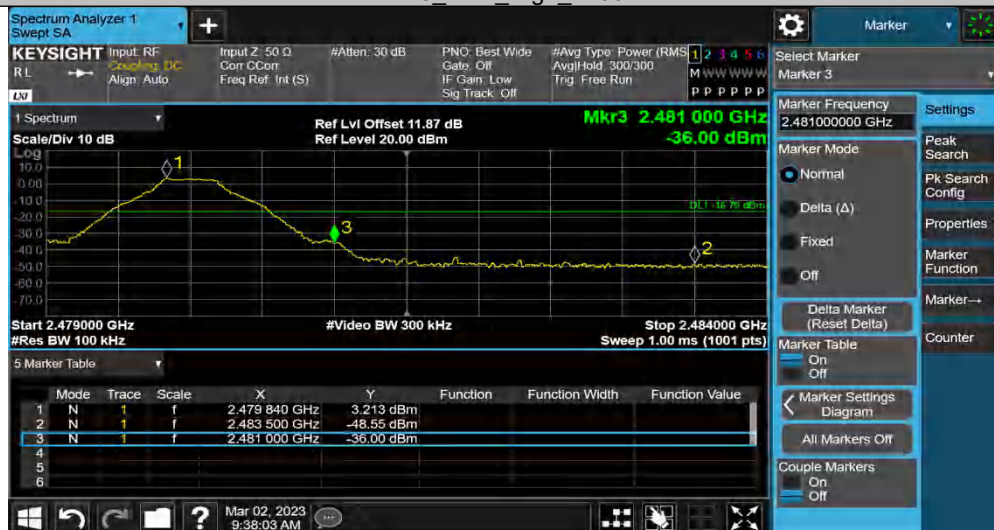


DH5 Ant1 Low Hop 2402



DH5 Ant1 High Hop 2480

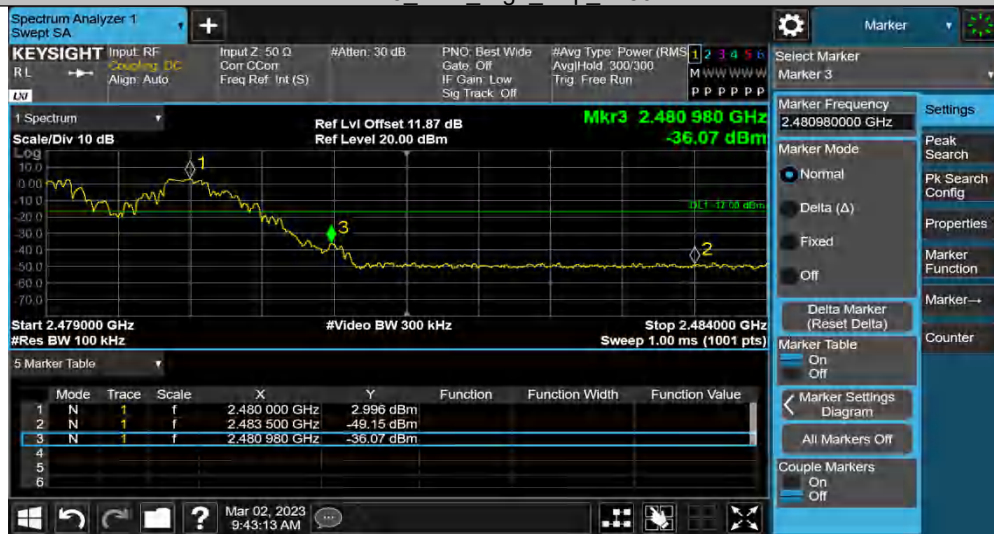


3DH5 Ant1 Low 2402

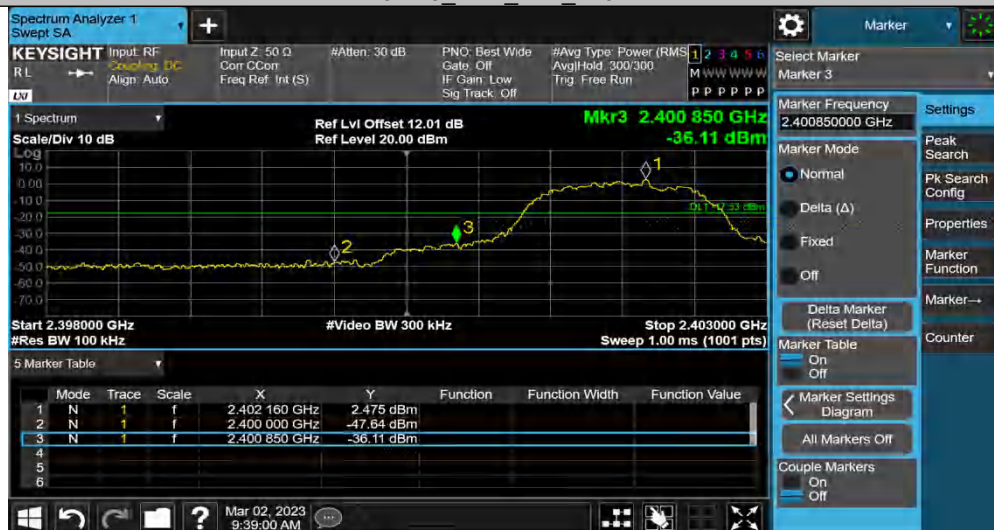


3DH5 Ant1 High 2480




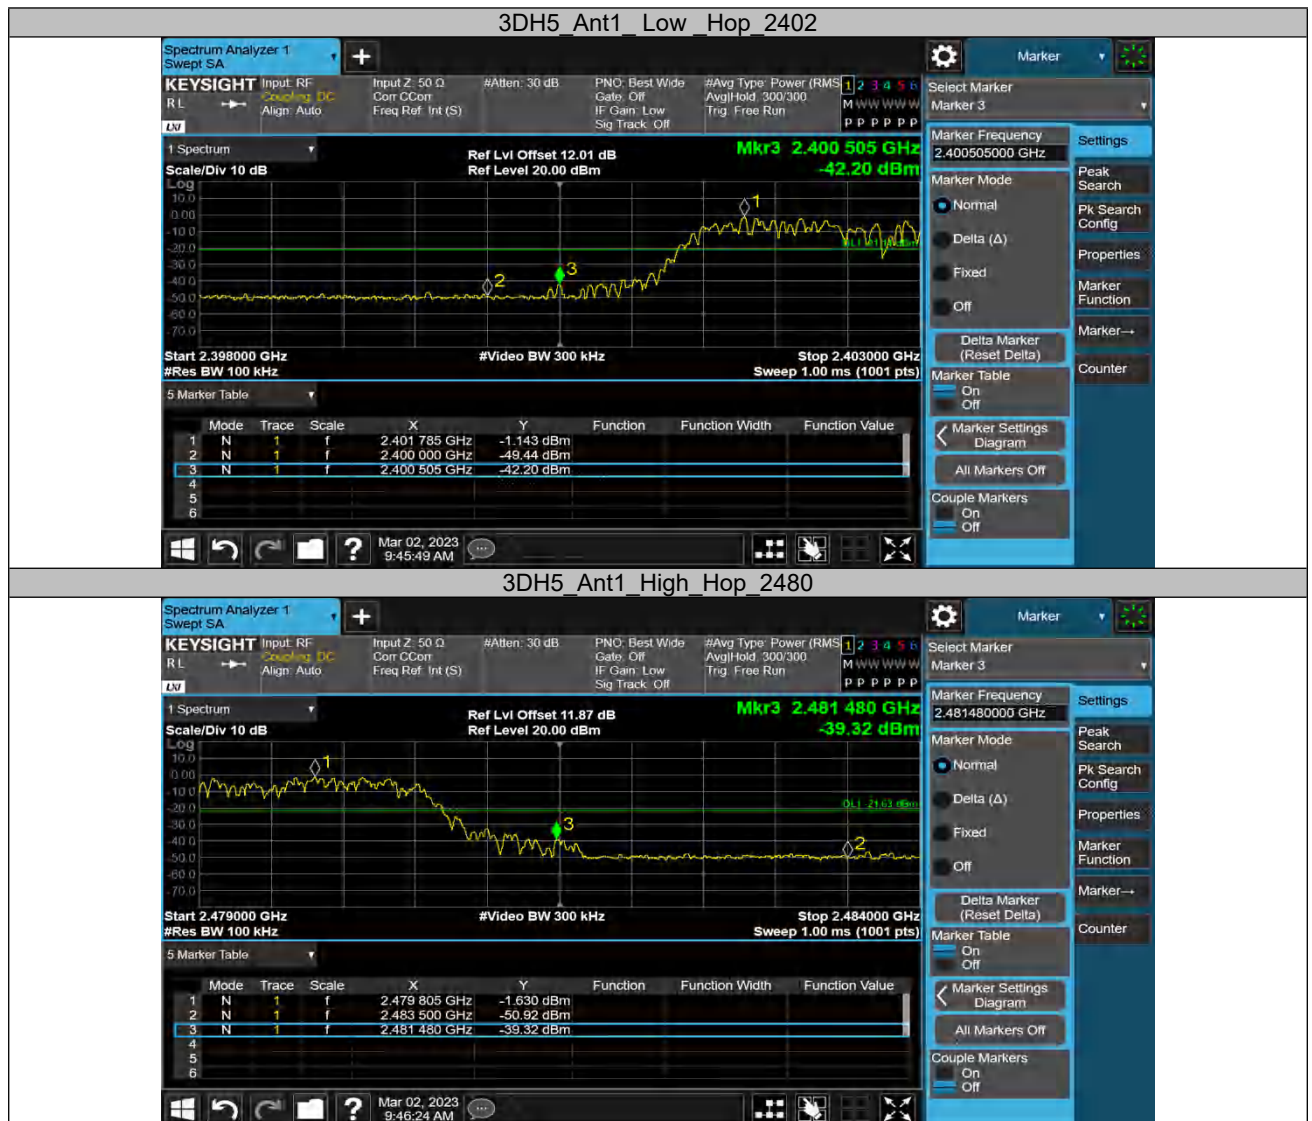



Conducted Spurious Emission


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-3.14	-3.14	---	PASS
			30~1000	-3.14	-47.64	≤-23.14	PASS
			1000~26500	-3.14	-38.88	≤-23.14	PASS
		2441	Reference	-2.64	-2.64	---	PASS
			30~1000	-2.64	-48.02	≤-22.64	PASS
			1000~26500	-2.64	-39.18	≤-22.64	PASS
		2480	Reference	-1.55	-1.55	---	PASS
			30~1000	-1.55	-46.42	≤-21.55	PASS
			1000~26500	-1.55	-38.98	≤-21.55	PASS
3DH5	Ant1	2402	Reference	-2.63	-2.63	---	PASS
			30~1000	-2.63	-47.82	≤-22.63	PASS
			1000~26500	-2.63	-38.85	≤-22.63	PASS
		2441	Reference	-4.43	-4.43	---	PASS
			30~1000	-4.43	-47.81	≤-24.43	PASS
			1000~26500	-4.43	-39.3	≤-24.43	PASS
		2480	Reference	-3.48	-3.48	---	PASS
			30~1000	-3.48	-47.79	≤-23.48	PASS
			1000~26500	-3.48	-38.87	≤-23.48	PASS

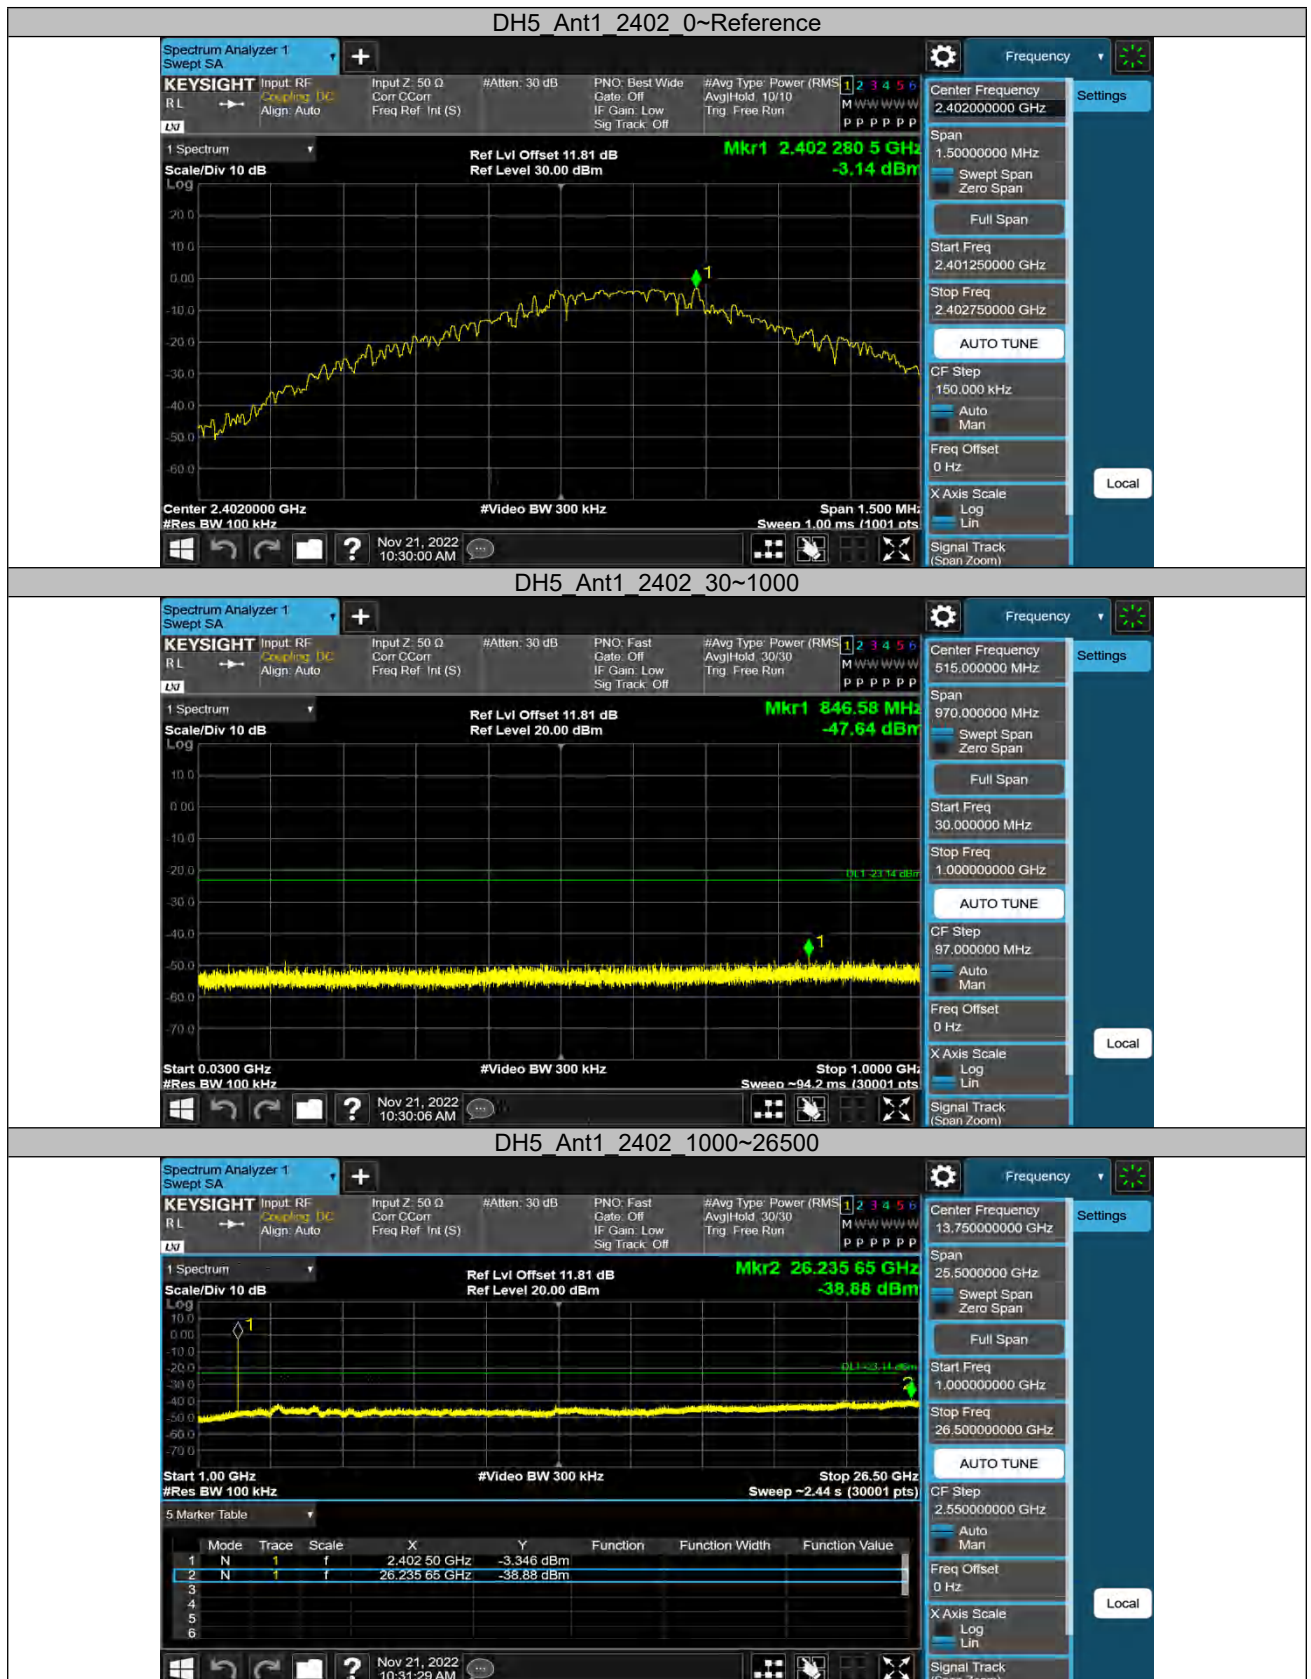


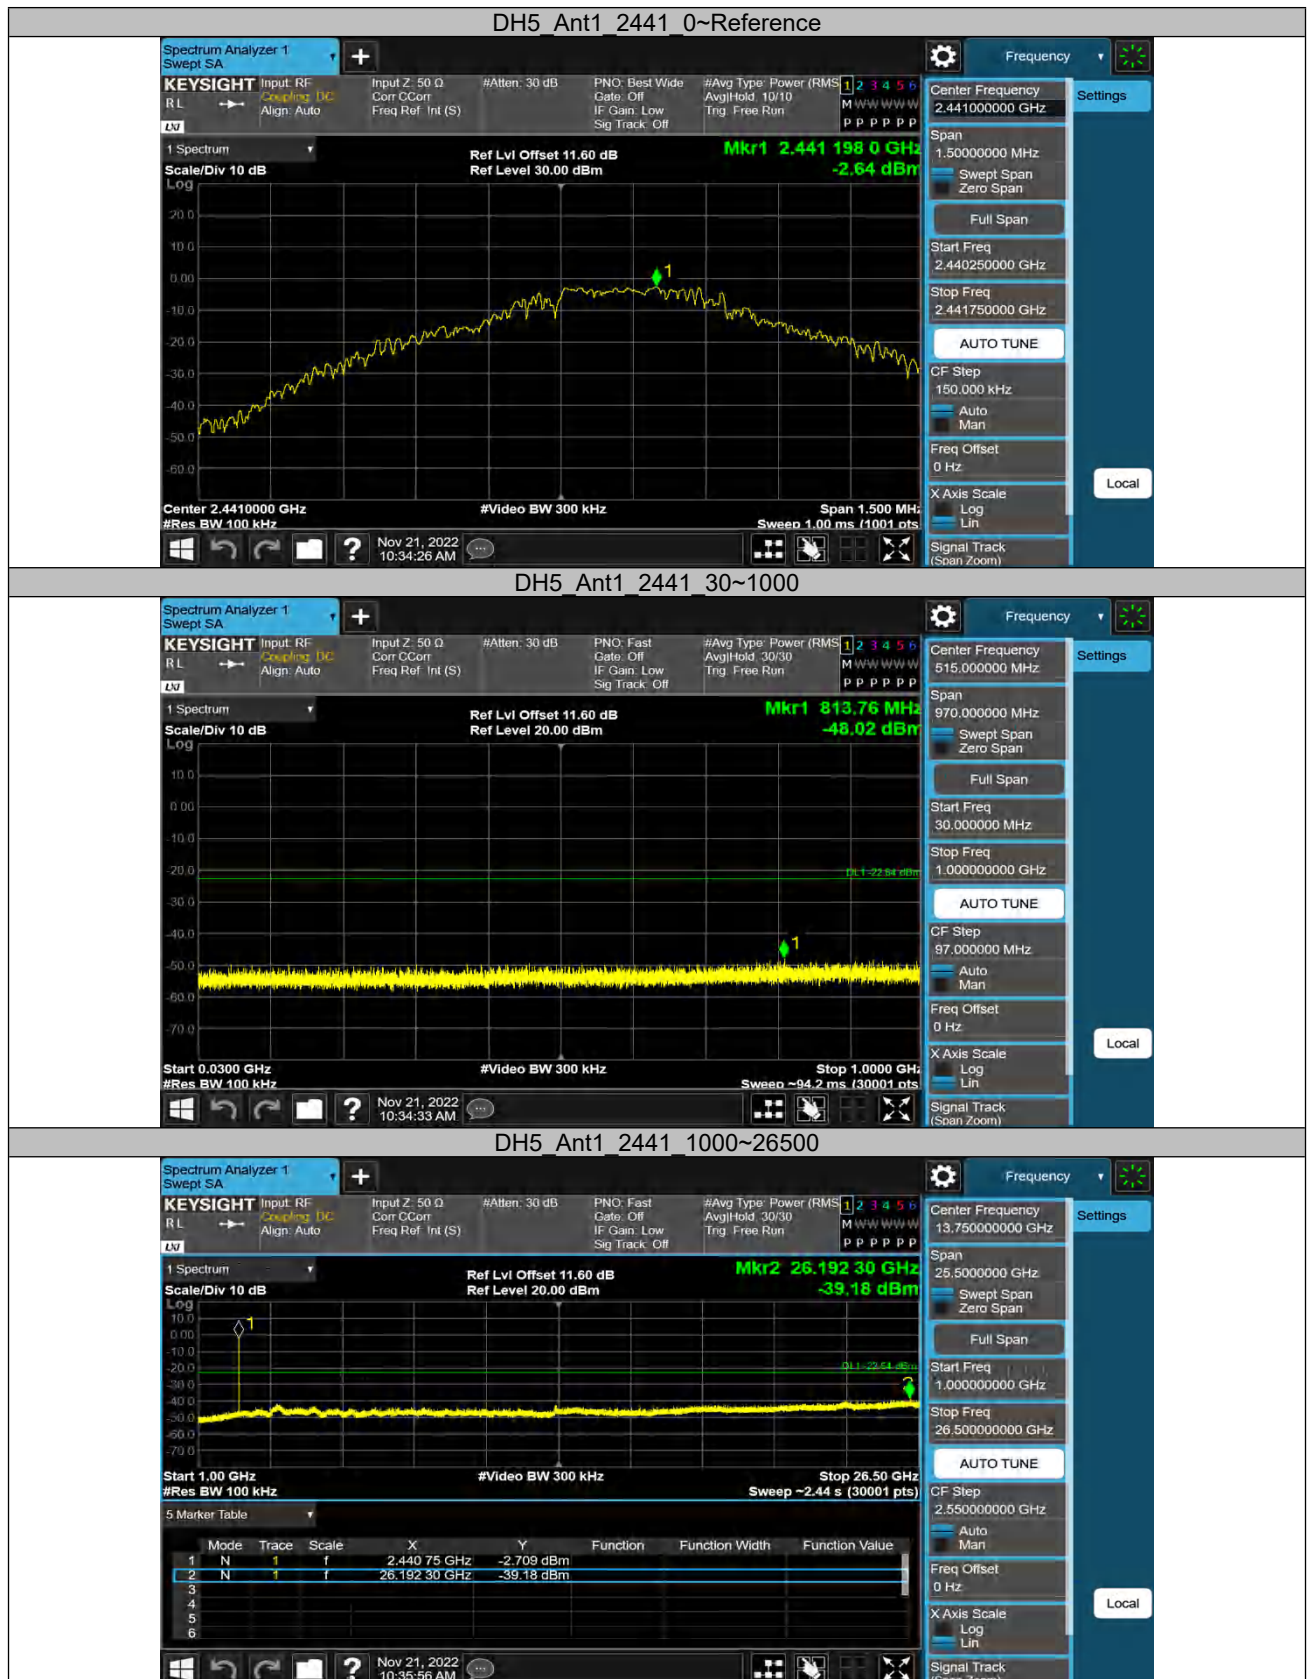

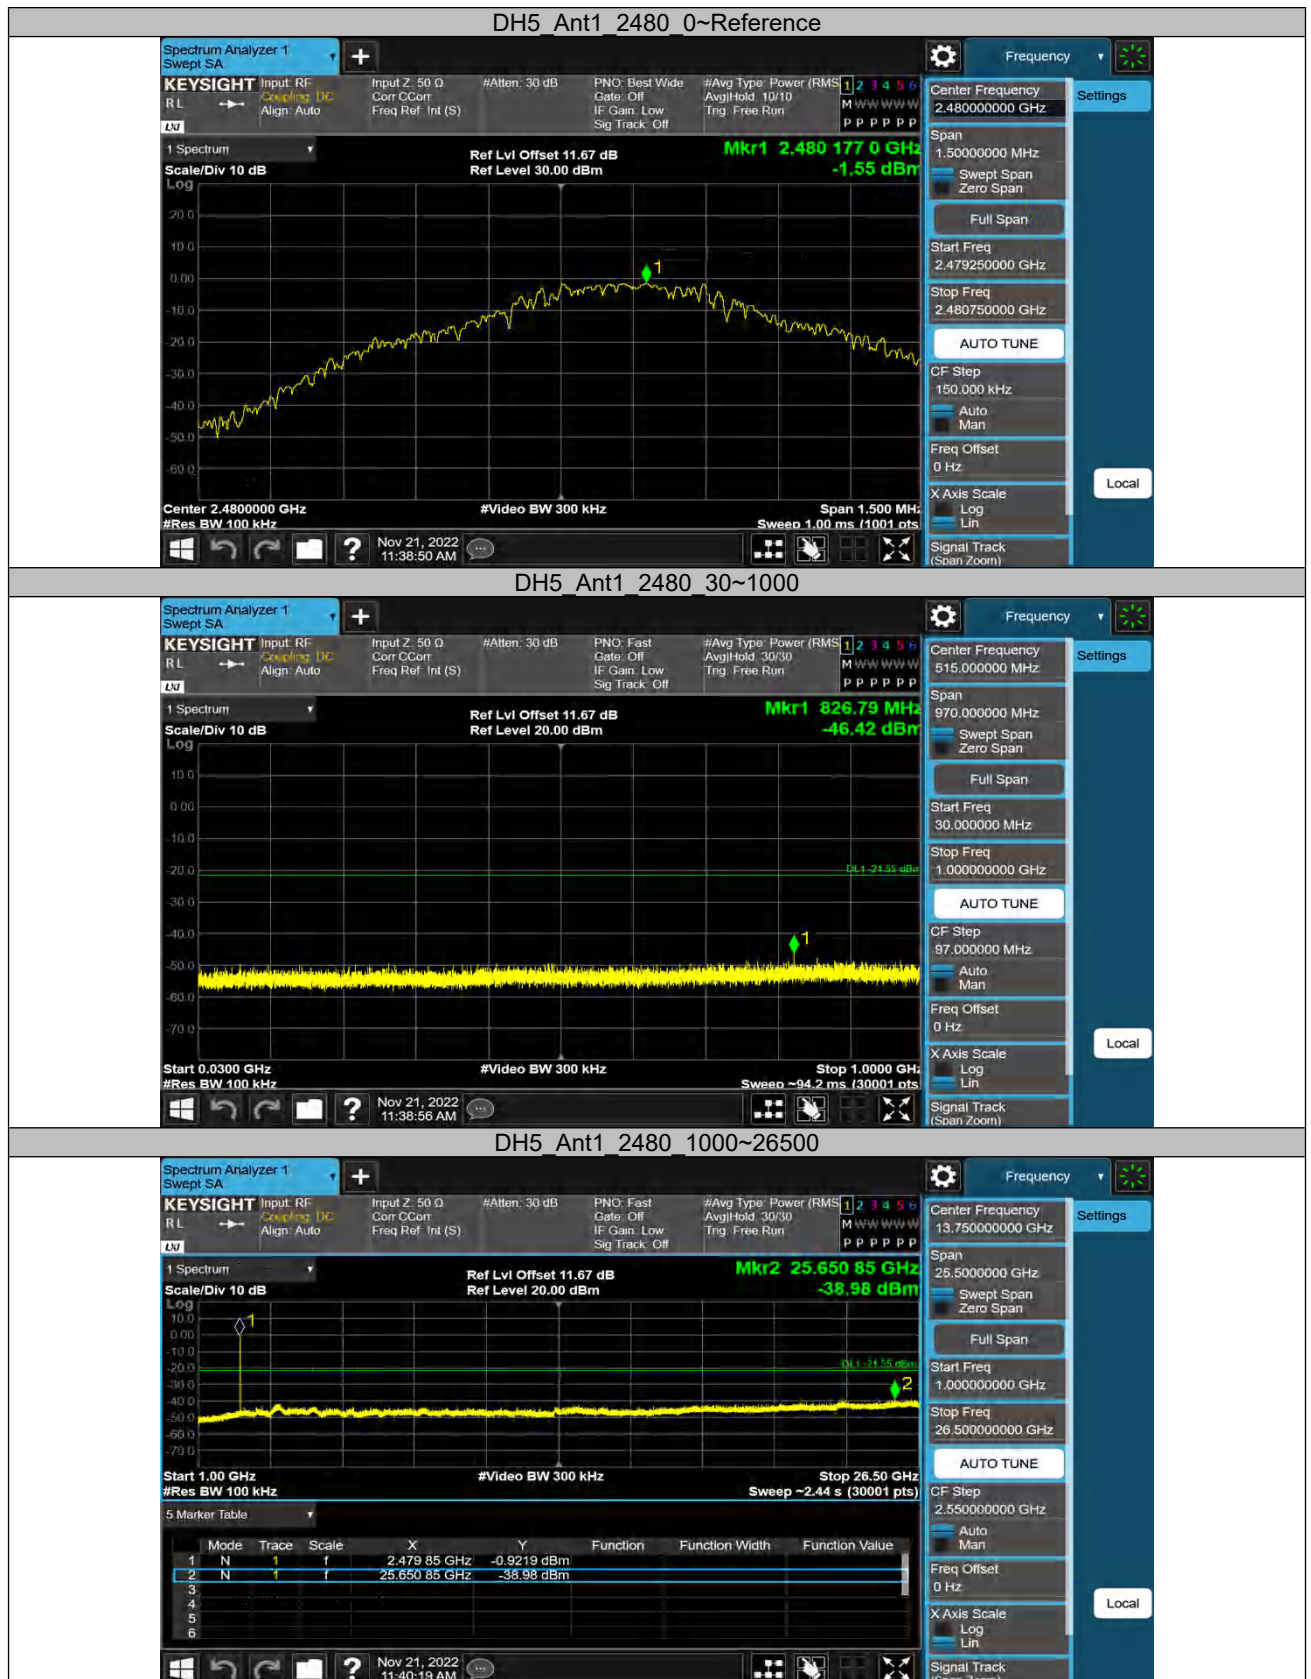

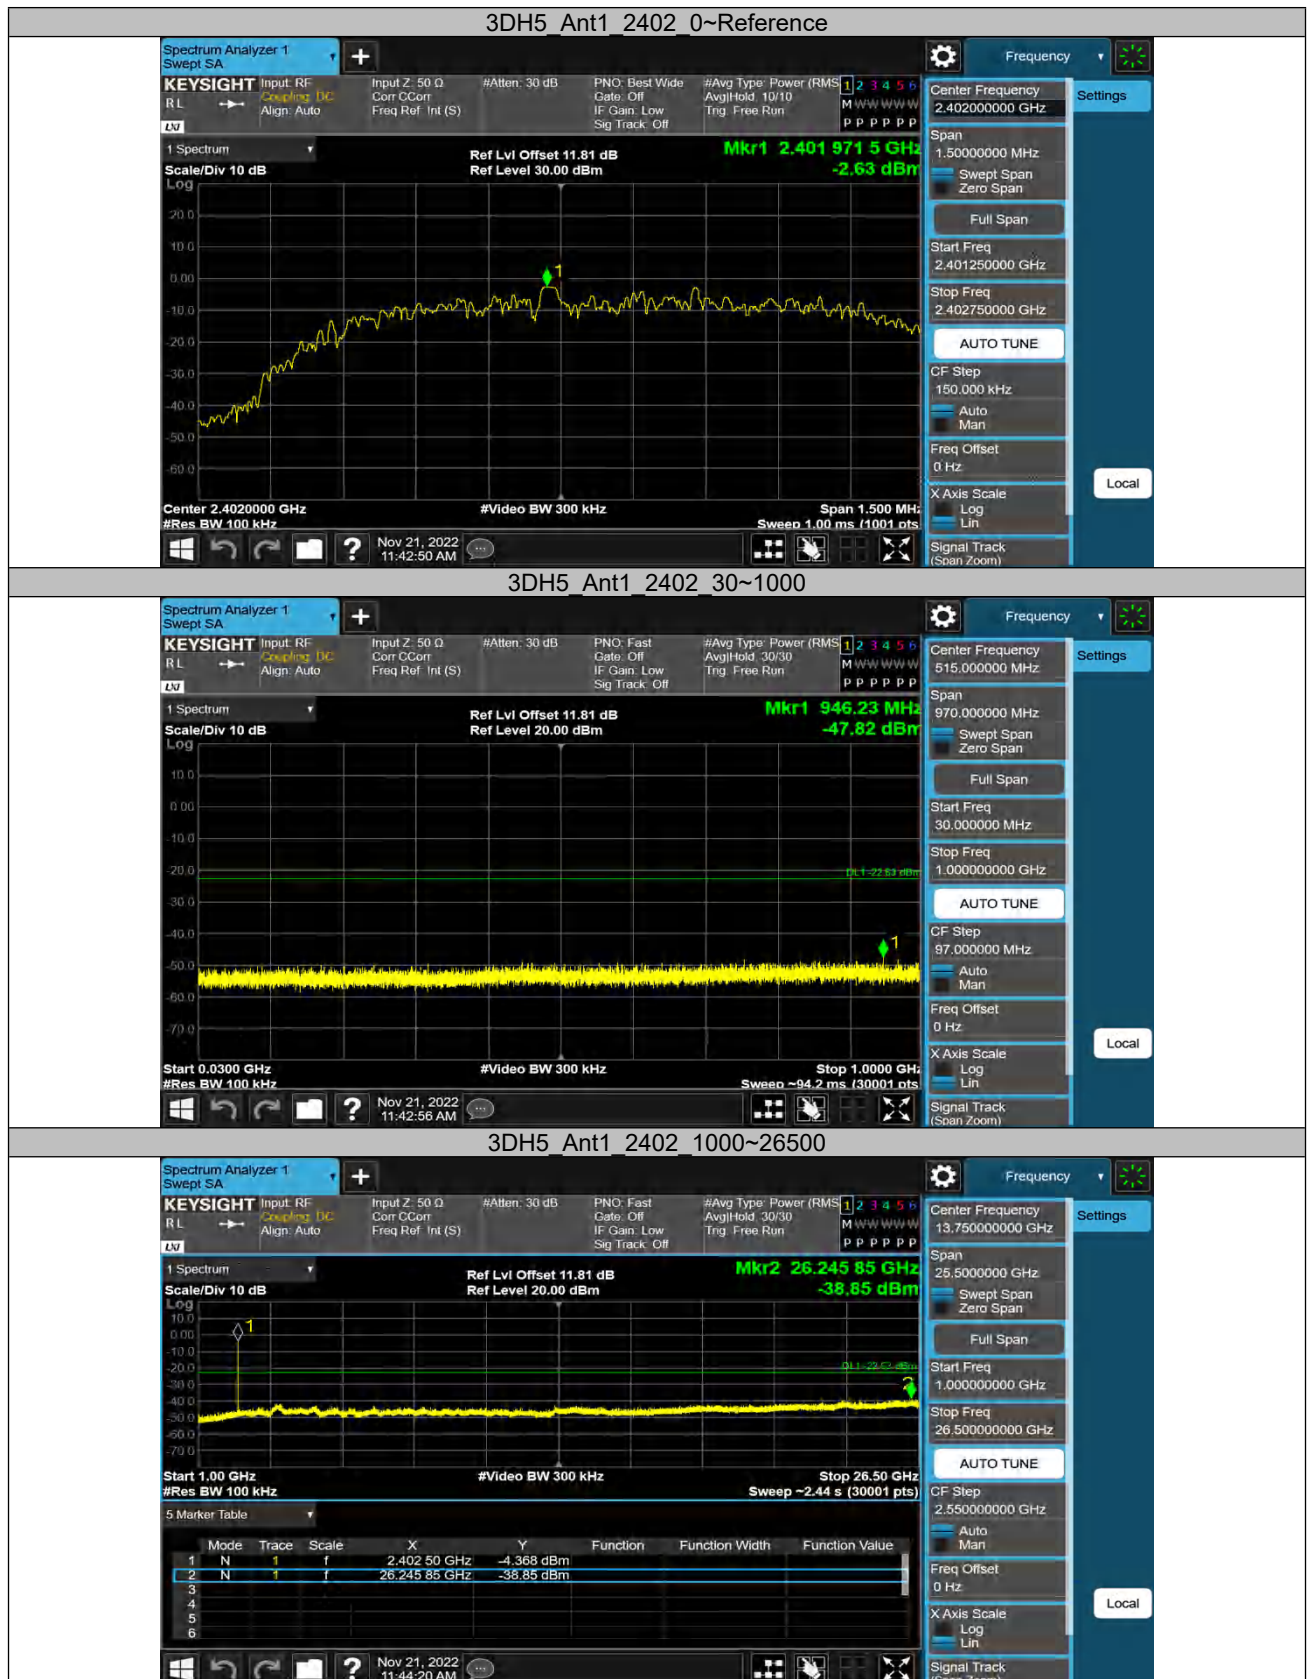

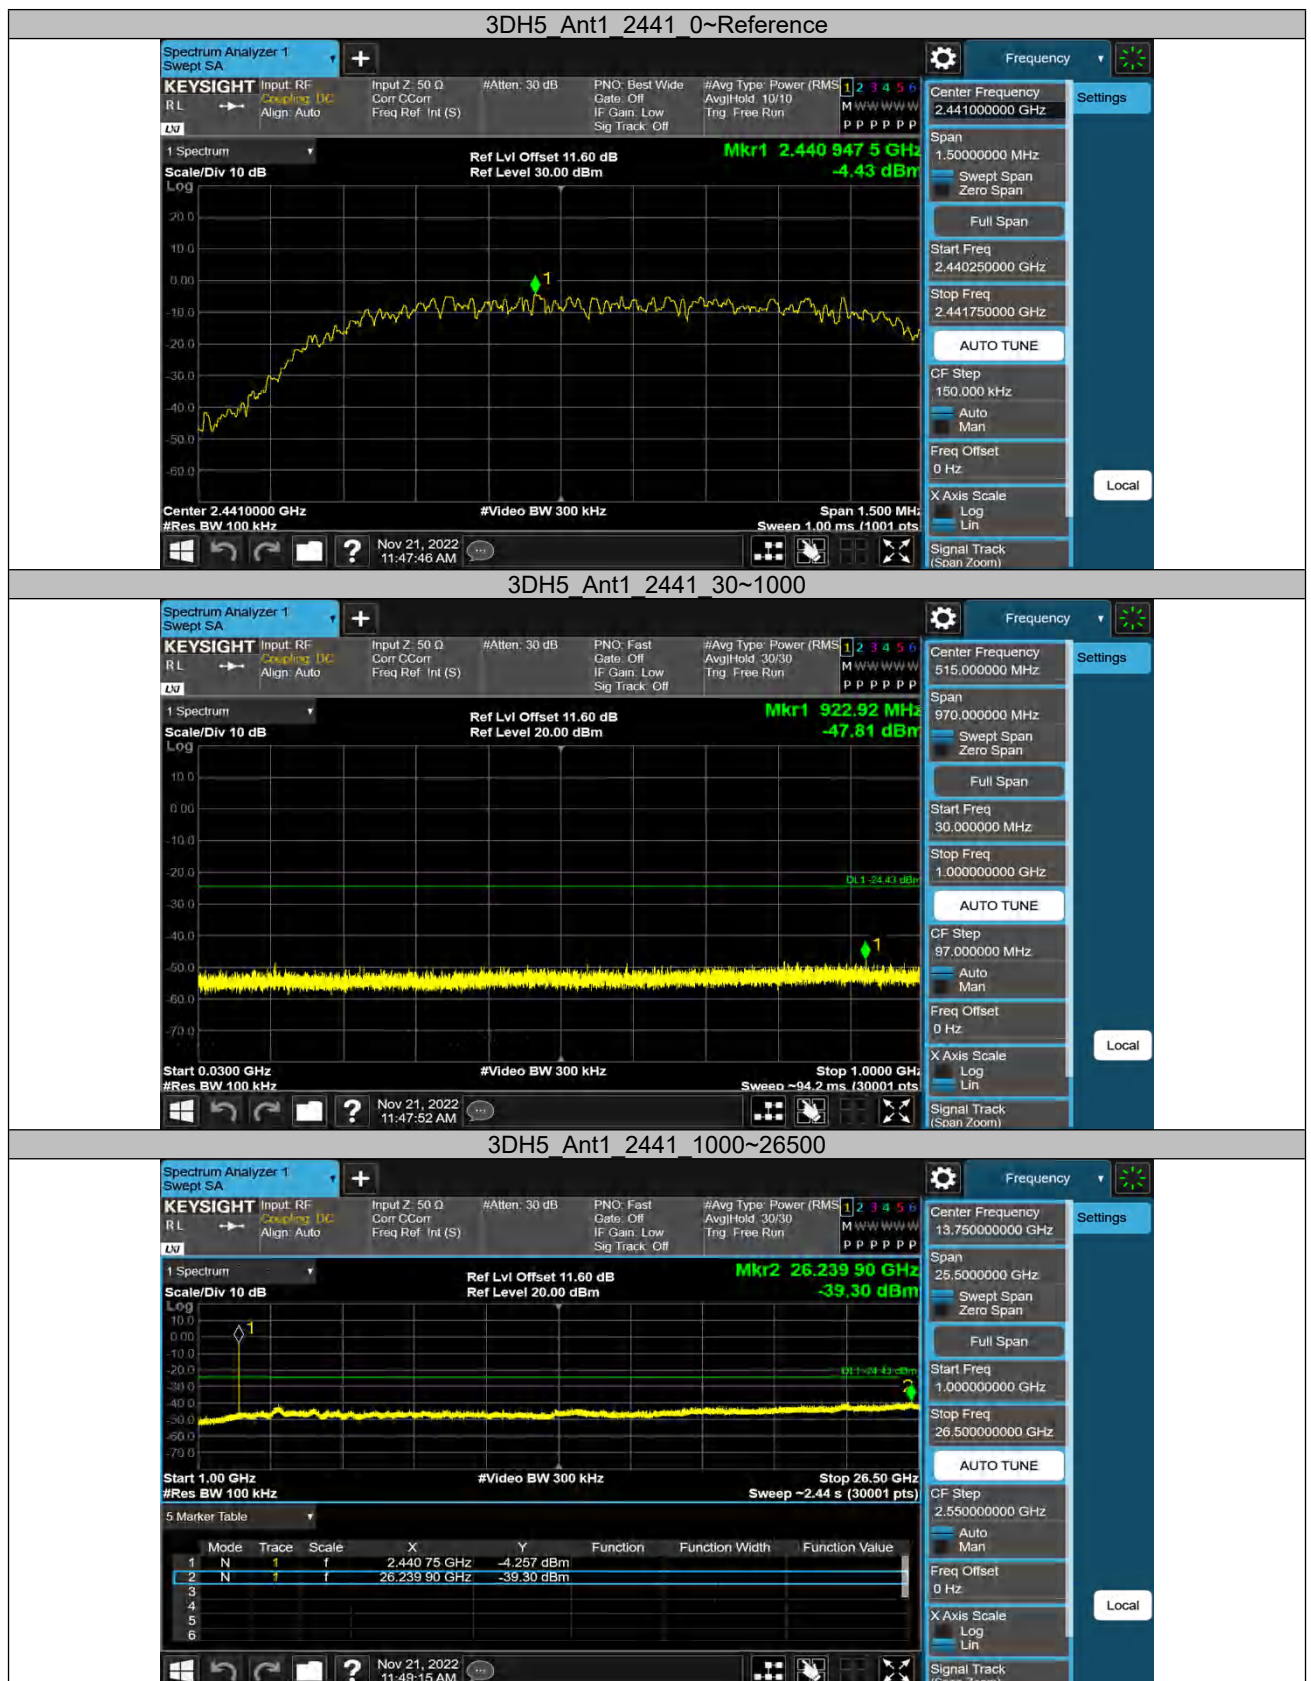

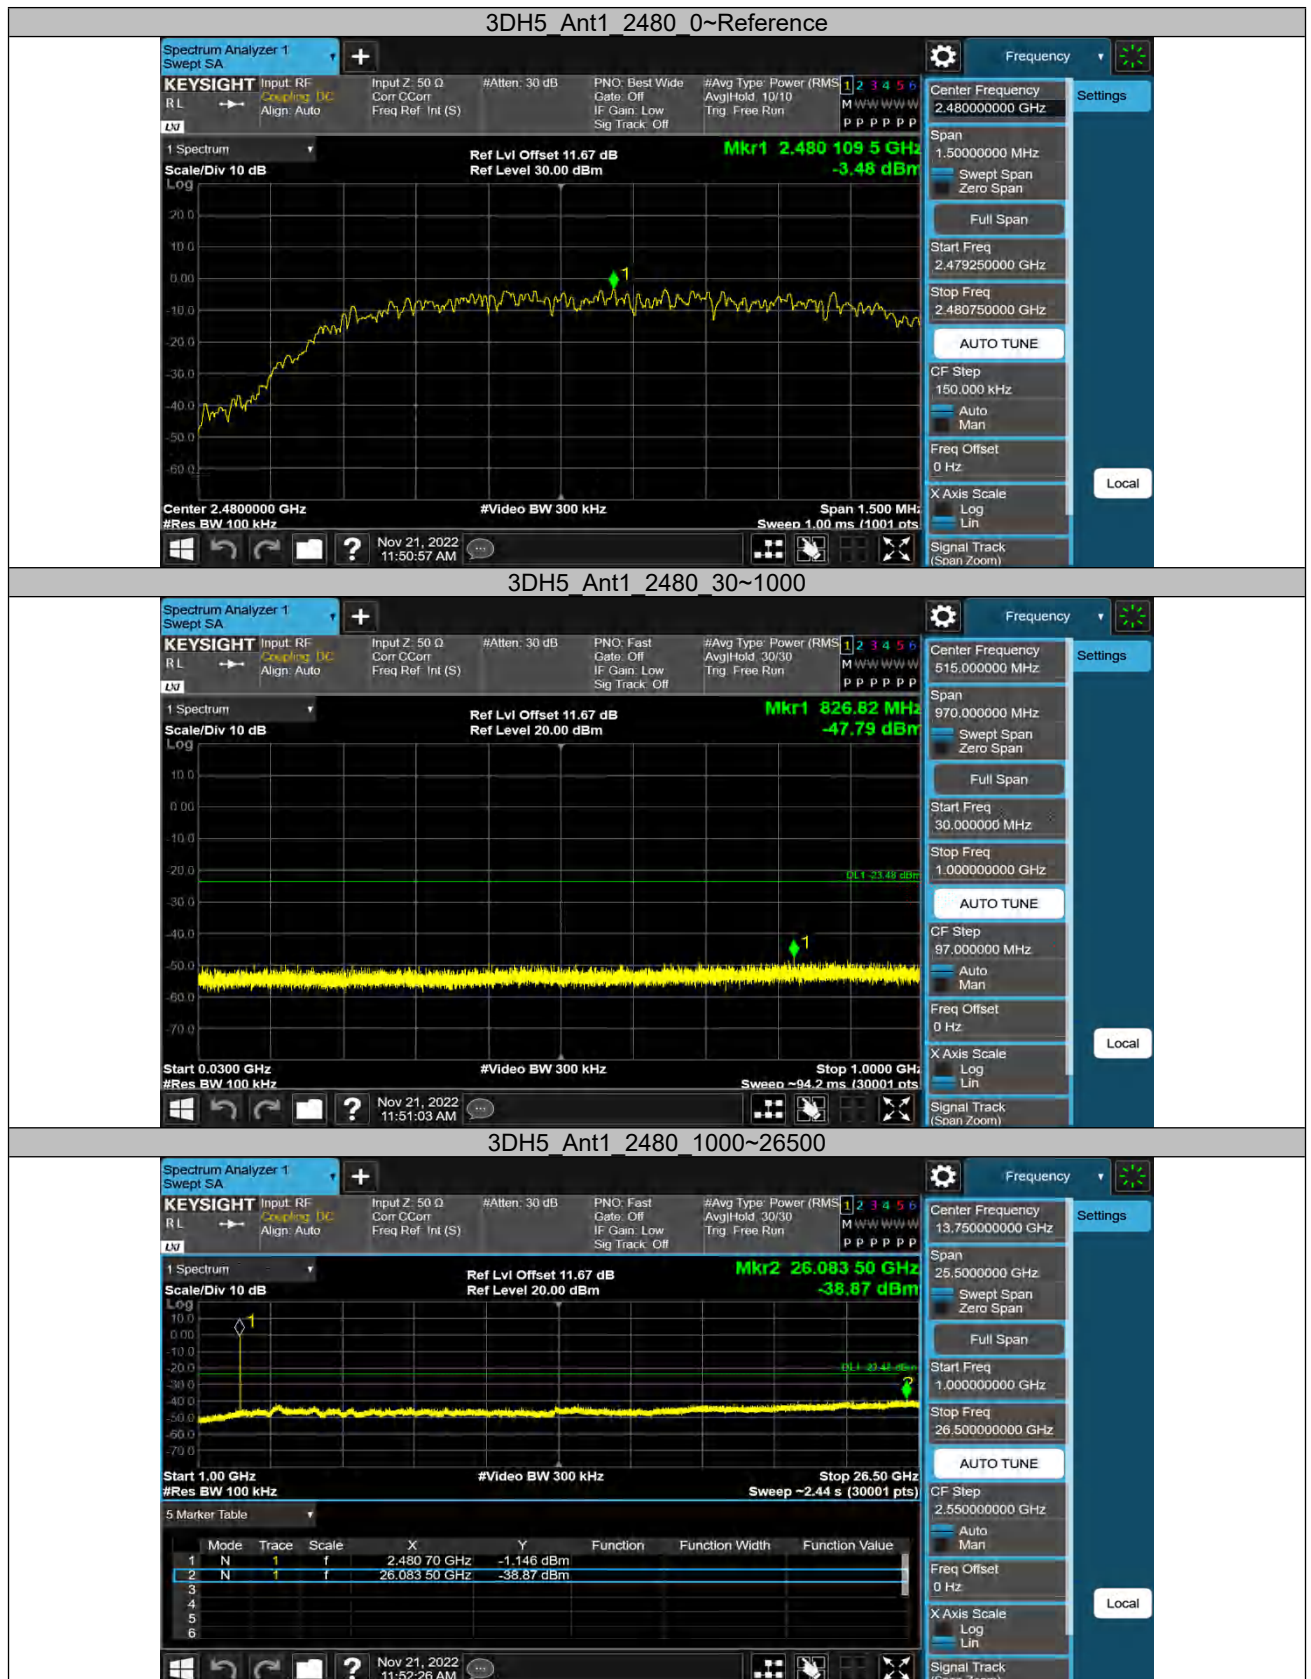


Appendix B.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30 MHz - 1GHz

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

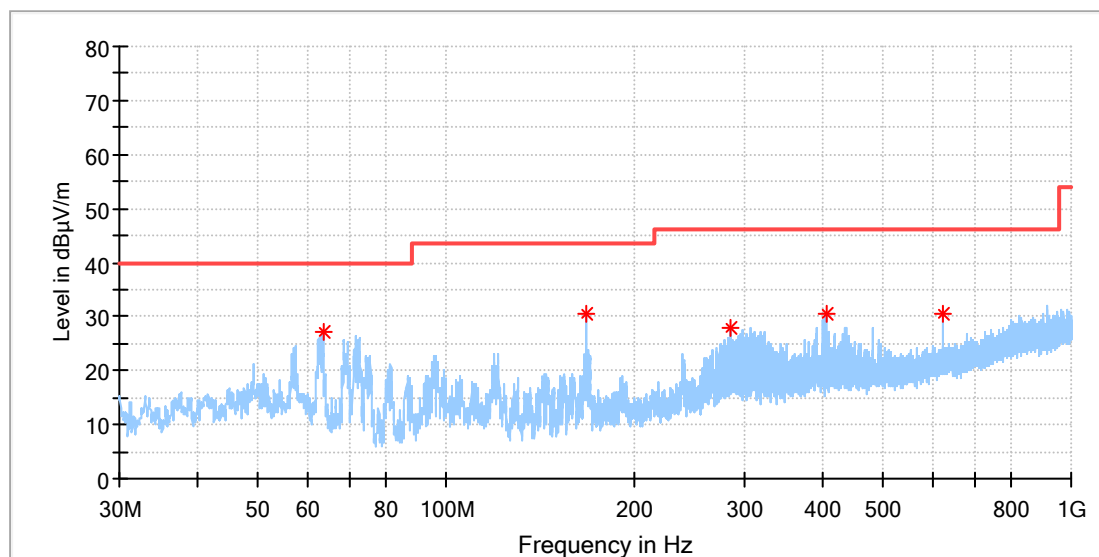

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
63.562000	26.98	40.00	13.02	100.0	H	309.0	-19.7
168.031000	30.62	43.50	12.88	100.0	H	249.0	-21.3
285.789000	28.02	46.00	17.98	100.0	H	0.0	-16.6
404.856500	30.42	46.00	15.58	100.0	H	331.0	-13.6
624.076500	30.57	46.00	15.43	100.0	H	276.0	-9.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

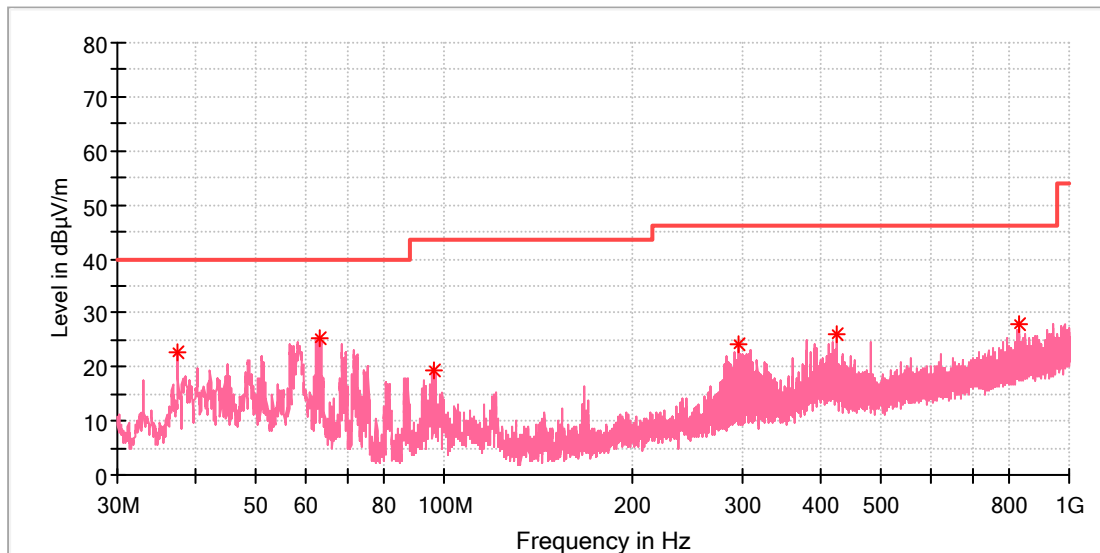

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.498846	22.67	40.00	17.33	100.0	V	0.0	-21.2
63.129231	25.43	40.00	14.57	100.0	V	188.0	-20.0
96.631539	19.24	43.50	24.26	100.0	V	248.0	-19.8
295.481539	24.17	46.00	21.83	100.0	V	241.0	-16.7
425.275000	26.17	46.00	19.83	100.0	V	2.0	-13.7
833.495769	27.87	46.00	18.13	100.0	V	265.0	-6.1

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

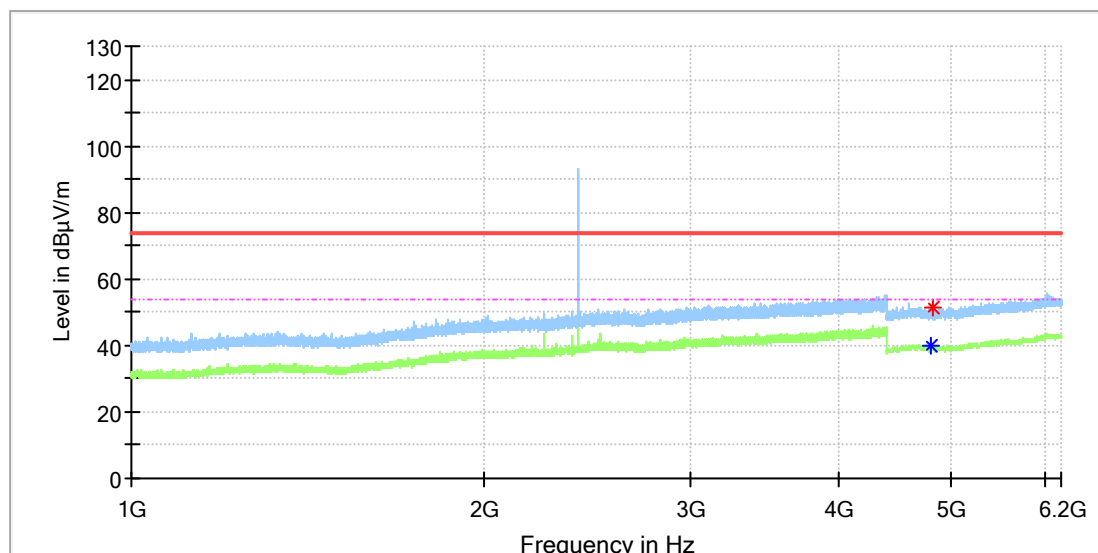

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	---	39.78	54.00	14.22	100.0	H	279.0	11.8
4816.000000	51.45	---	74.00	22.55	100.0	H	302.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

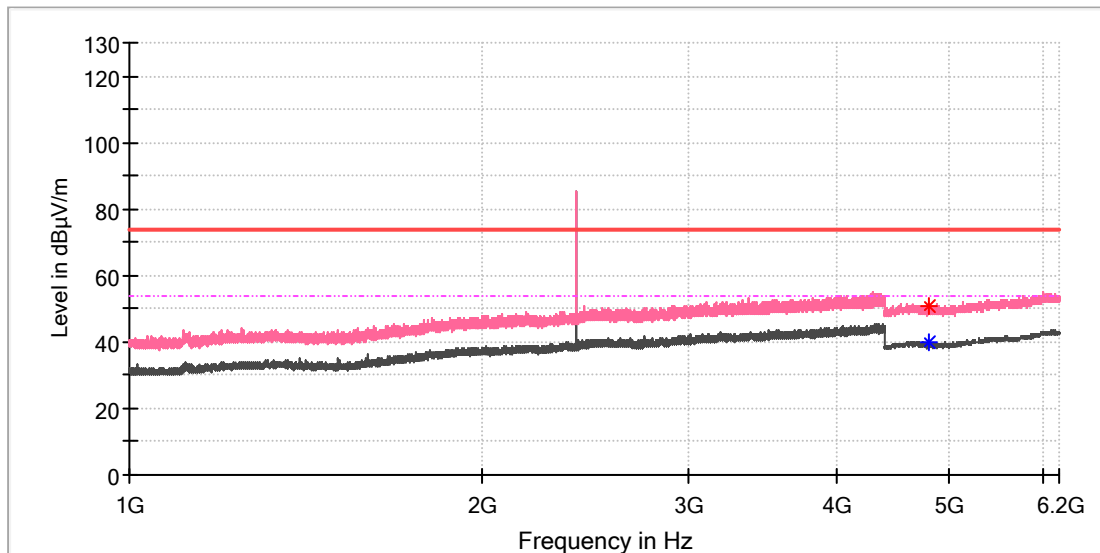

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4802.500000	50.85	---	74.00	23.15	100.0	V	263.0	11.8
4802.500000	---	39.65	54.00	14.35	100.0	V	263.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

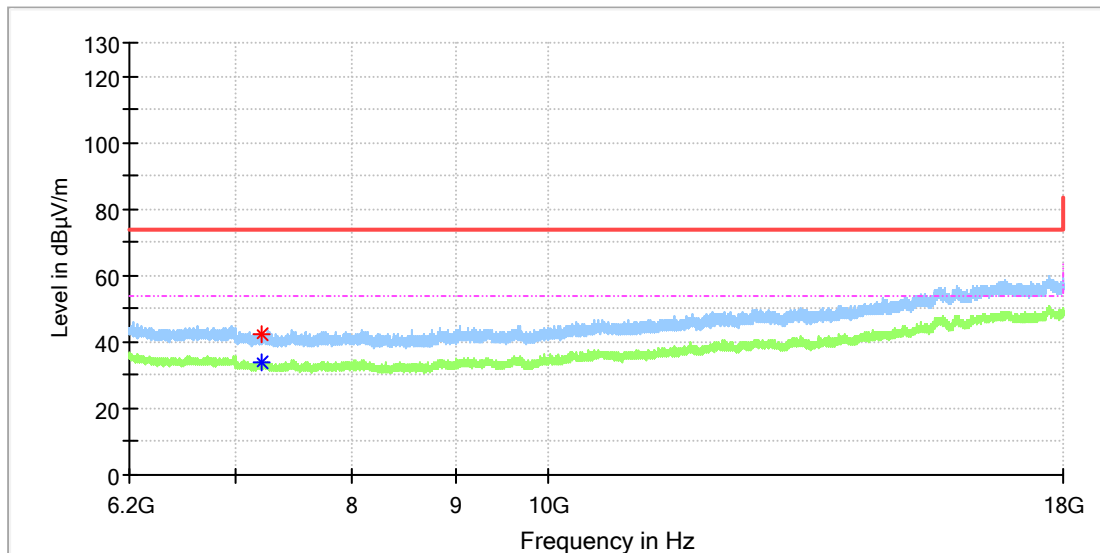

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7203.491667	---	33.95	54.00	20.05	100.0	H	261.0	8.8
7204.966667	42.32	---	74.00	31.68	100.0	H	211.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

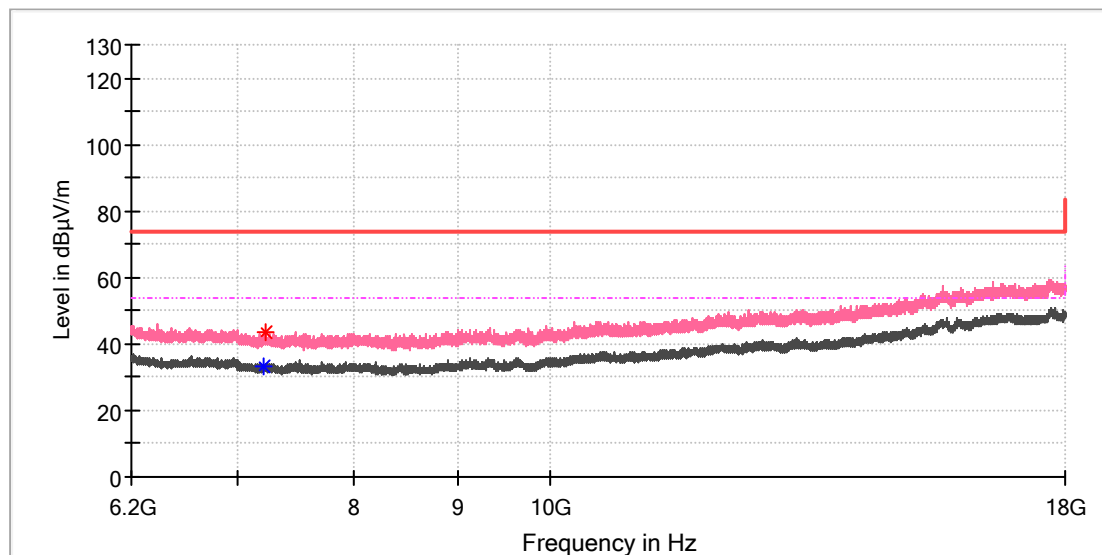

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7213.325000	---	33.56	54.00	20.44	100.0	V	11.0	8.7
7228.075000	43.28	---	74.00	30.72	100.0	V	109.0	8.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

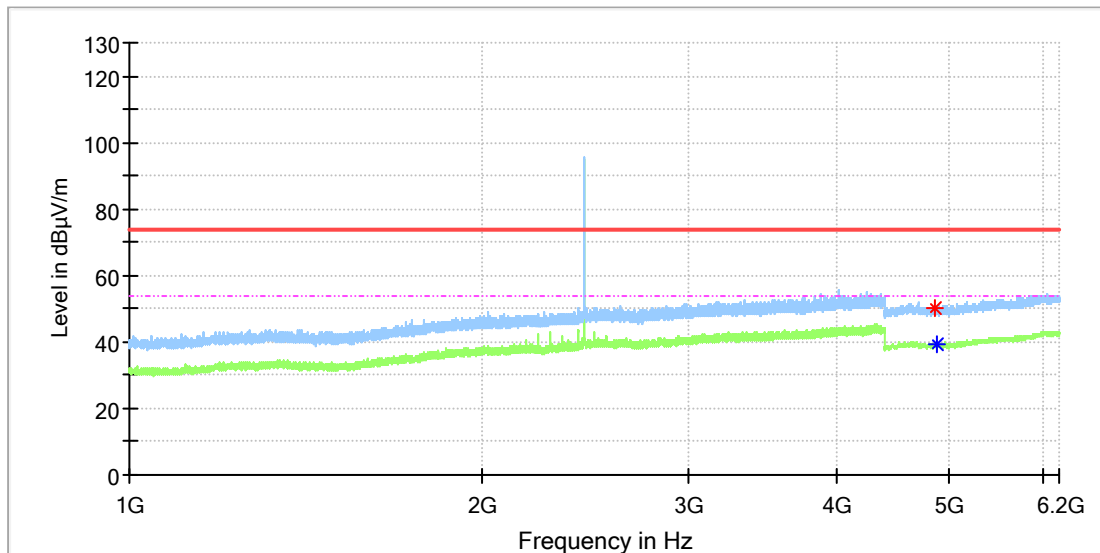

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4866.500000	50.26	---	74.00	23.74	100.0	H	284.0	11.8
4882.000000	---	39.51	54.00	14.49	100.0	H	20.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

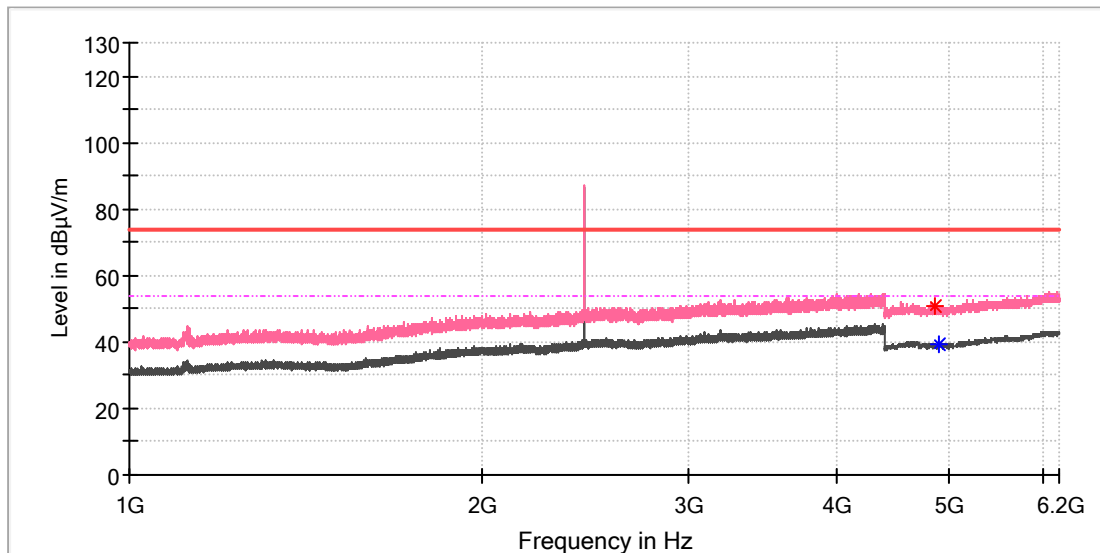

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4856.500000	50.71	---	74.00	23.29	100.0	V	283.0	11.8
4897.500000	---	39.33	54.00	14.67	100.0	V	270.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

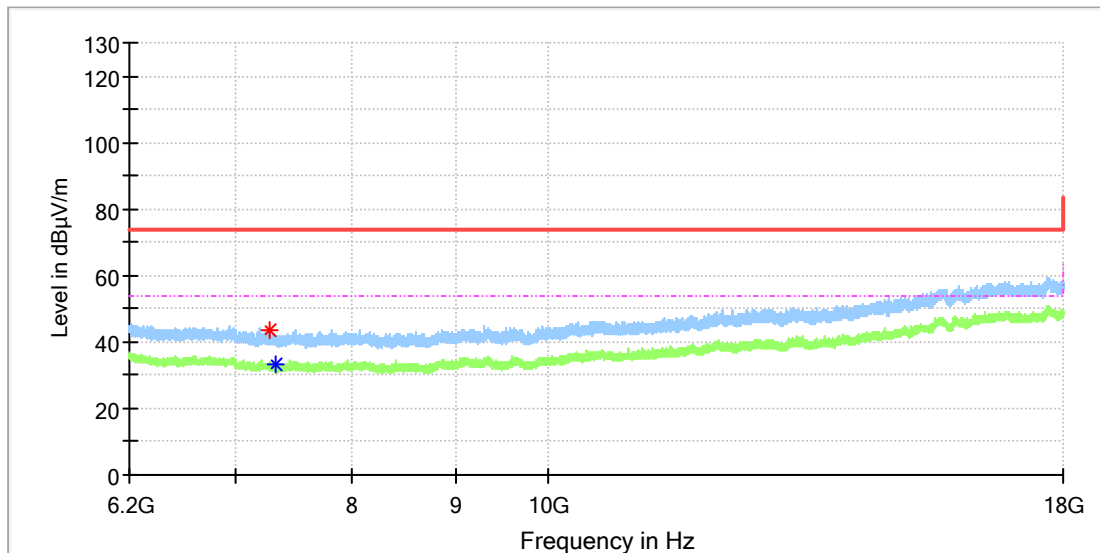

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7284.125000	43.75	---	74.00	30.25	100.0	H	38.0	8.4
7327.391667	---	33.20	54.00	20.80	100.0	H	194.0	8.1

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

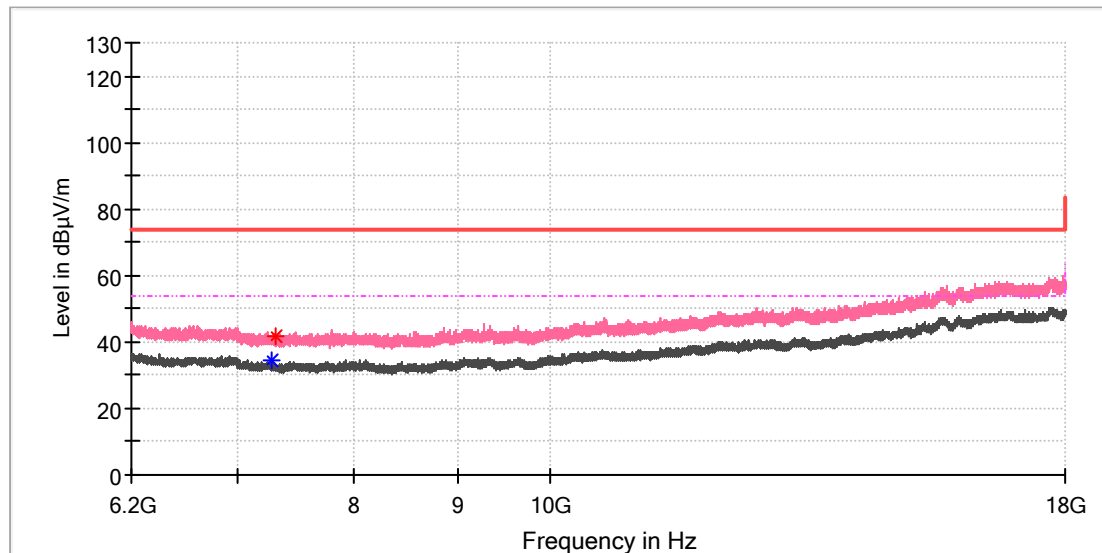

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7270.850000	---	34.47	54.00	19.54	100.0	V	347.0	8.5
7311.658333	41.94	---	74.00	32.06	100.0	V	357.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_High channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

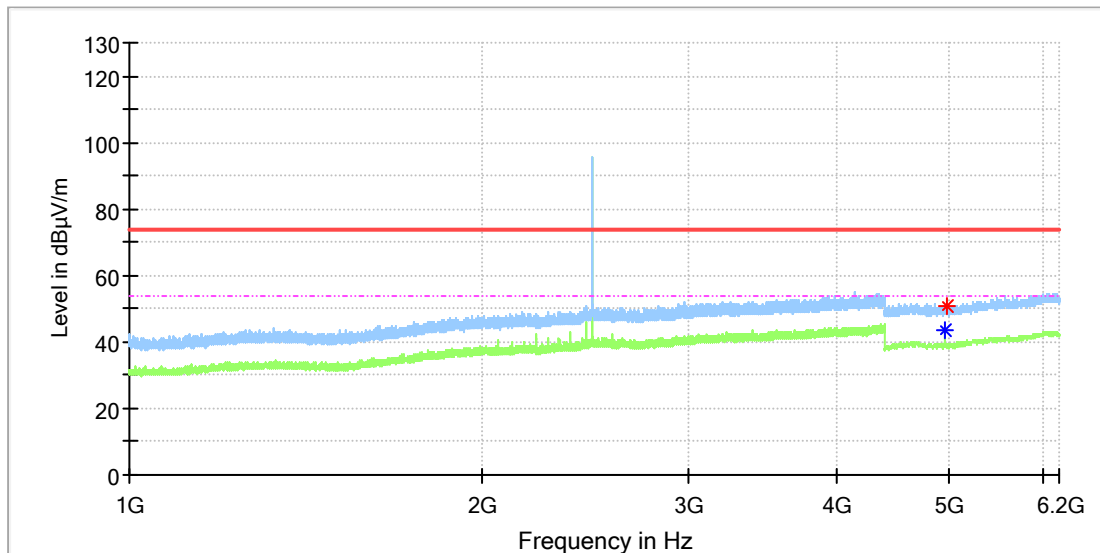

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.500000	---	43.35	54.00	10.65	100.0	H	283.0	11.8
4968.000000	51.06	---	74.00	22.94	100.0	H	173.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_High channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

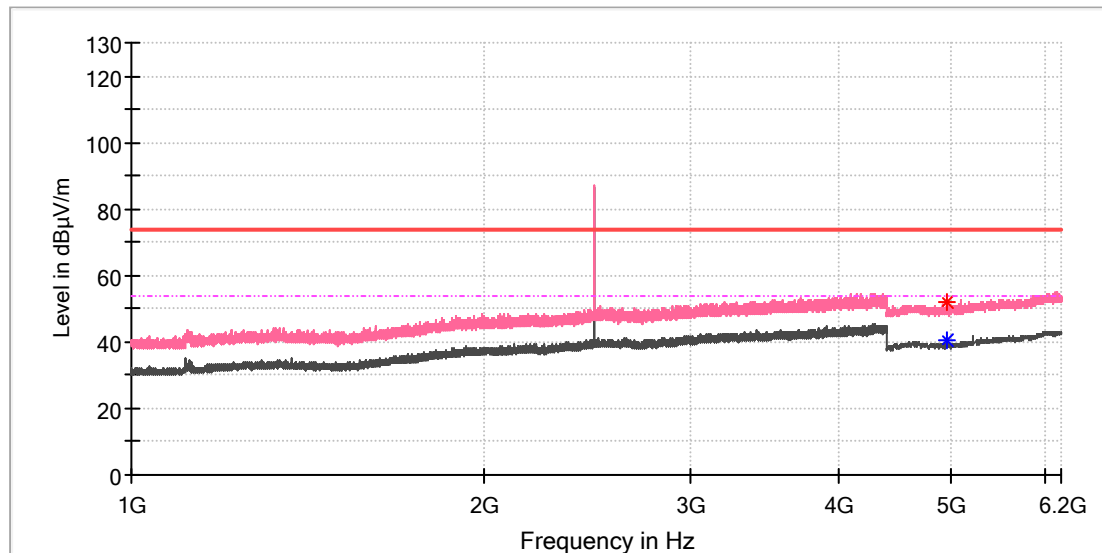

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	51.71	---	74.00	22.29	100.0	V	216.0	11.8
4960.000000	---	40.56	54.00	13.44	100.0	V	216.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_High channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

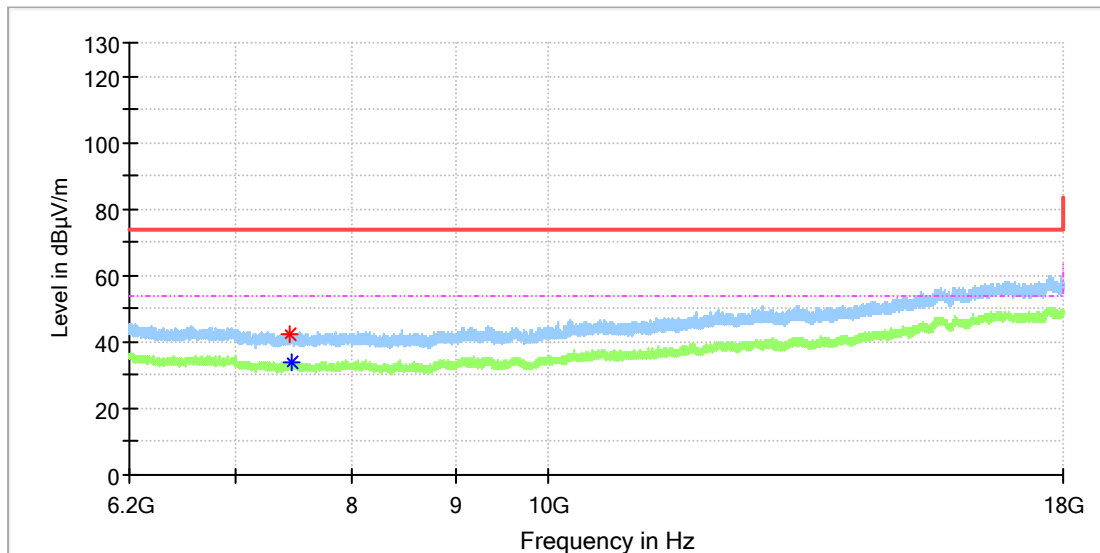

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7451.291667	42.50	---	74.00	31.50	100.0	H	109.0	8.5
7455.225000	---	33.87	54.00	20.13	100.0	H	14.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_High channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

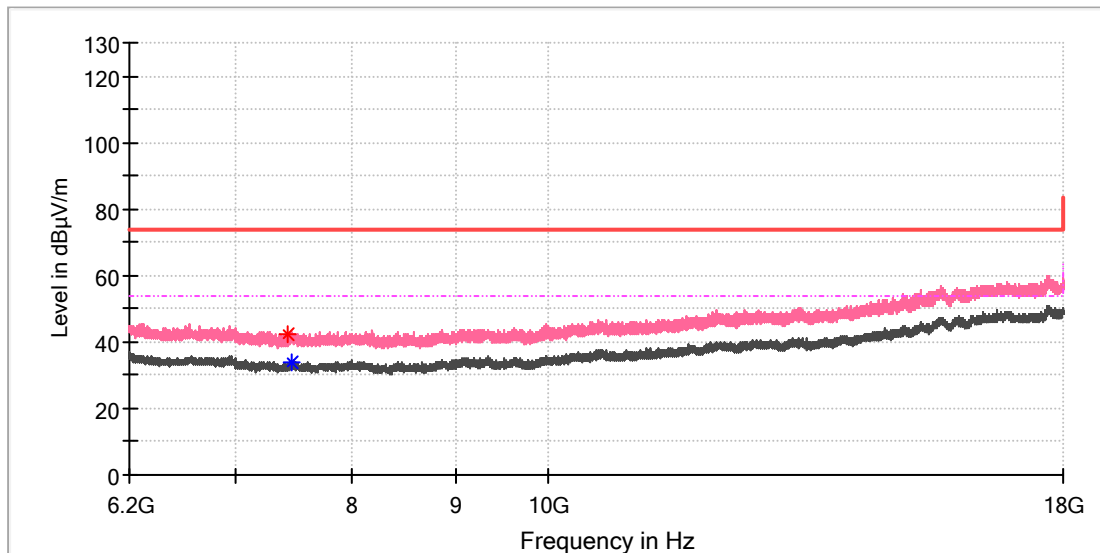

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7424.250000	42.62	---	74.00	31.38	100.0	V	169.0	8.4
7456.700000	---	34.05	54.00	19.95	100.0	V	0.0	8.5


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

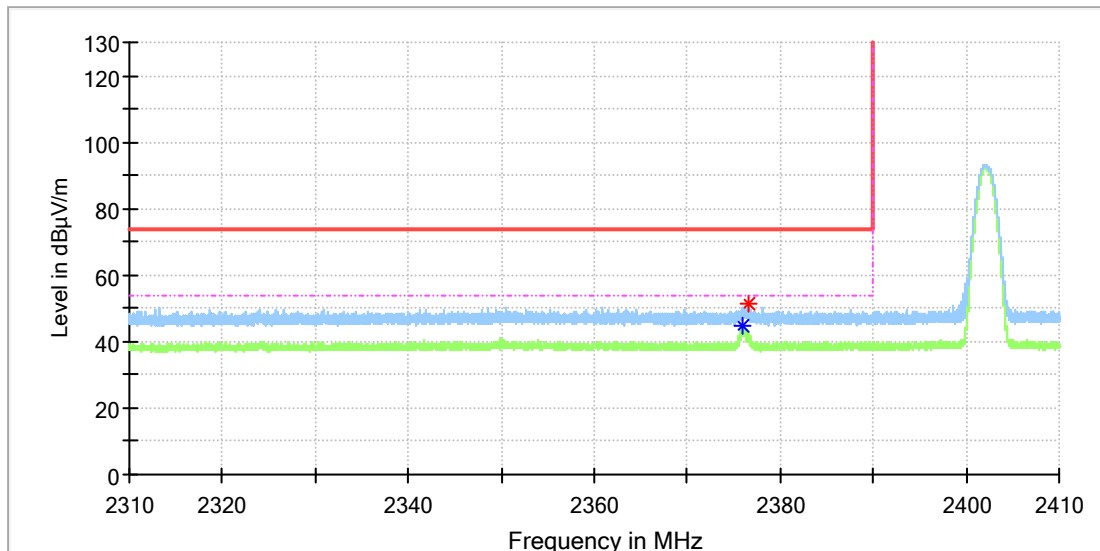

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2376.020000	---	44.53	54.00	9.47	100.0	H	295.0	6.9
2376.665000	51.21	---	74.00	22.79	100.0	H	271.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Bluetooth module
Model: RABT_ATS2819
Test Mode: BR_DH5_Low channel
Order No/Sample No: 168389208/A003324744-001
Test Voltage: DC 3.3V
Remark: Temp 22 Humi:52%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

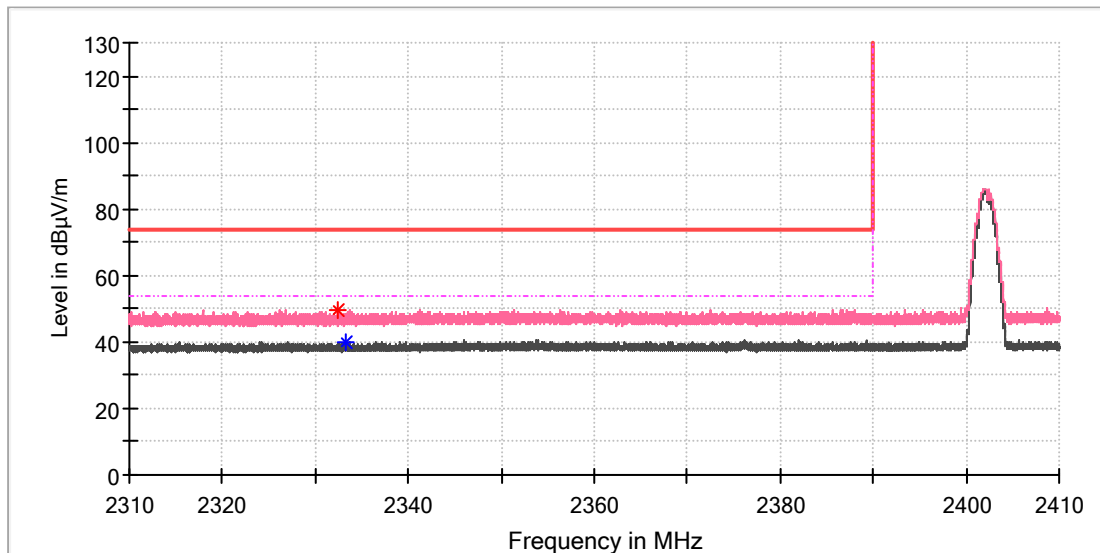

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2332.475000	49.39	---	74.00	24.61	100.0	V	218.0	6.7
2333.380000	---	40.19	54.00	13.81	100.0	V	336.0	6.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

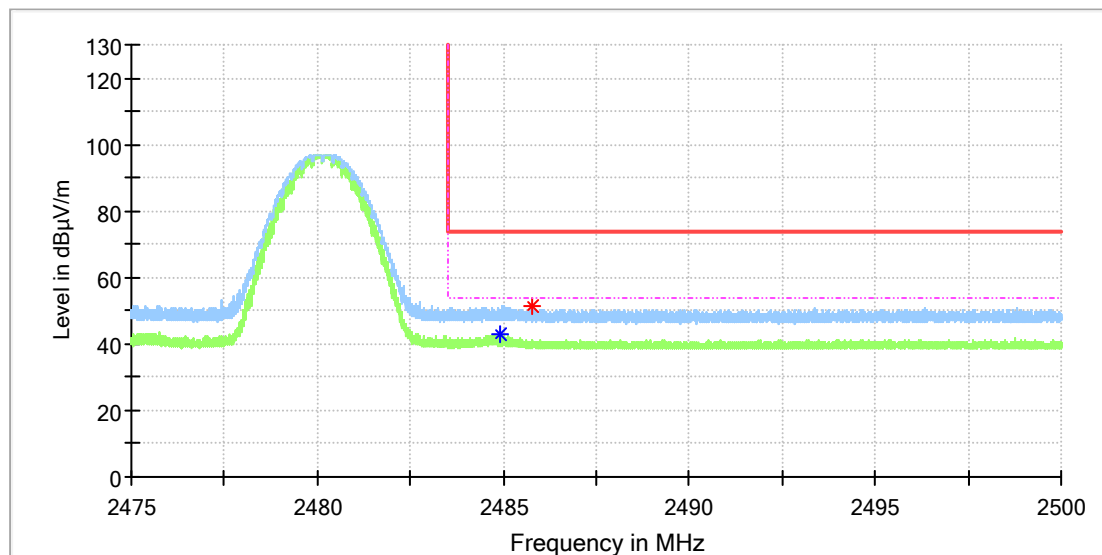

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.893750	---	42.68	54.00	11.32	100.0	H	66.0	7.4
2485.792500	51.50	---	74.00	22.50	100.0	H	0.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Bluetooth module
Model:	RABT_ATS2819
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168389208/A003324744-001
Test Voltage:	DC 3.3V
Remark:	Temp 22 Humi:52%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

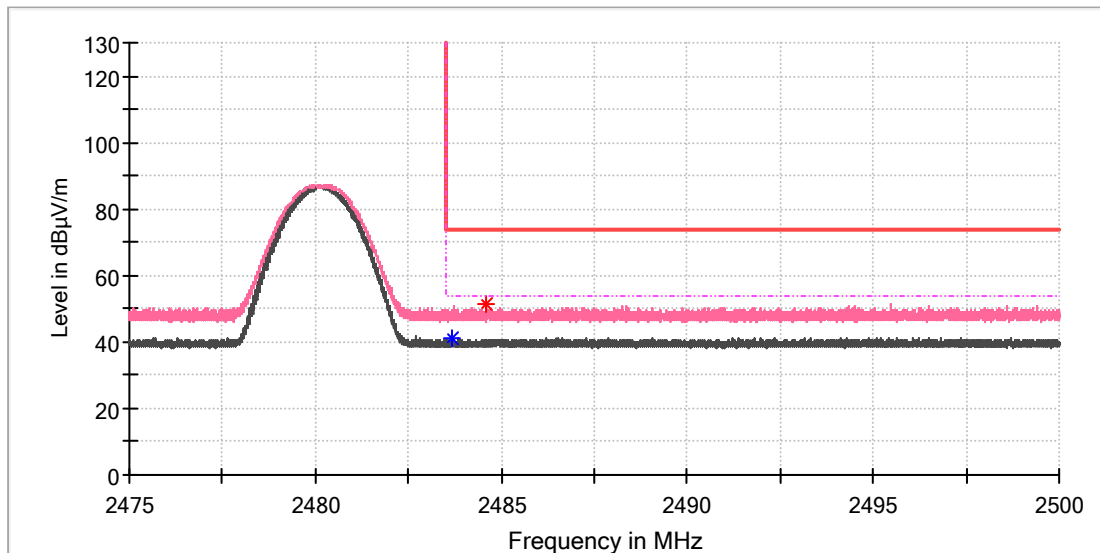

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.680000	---	41.23	54.00	12.77	100.0	V	181.0	7.4
2484.595000	51.19	---	74.00	22.81	100.0	V	320.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---