


Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5210 MHz

Remark:

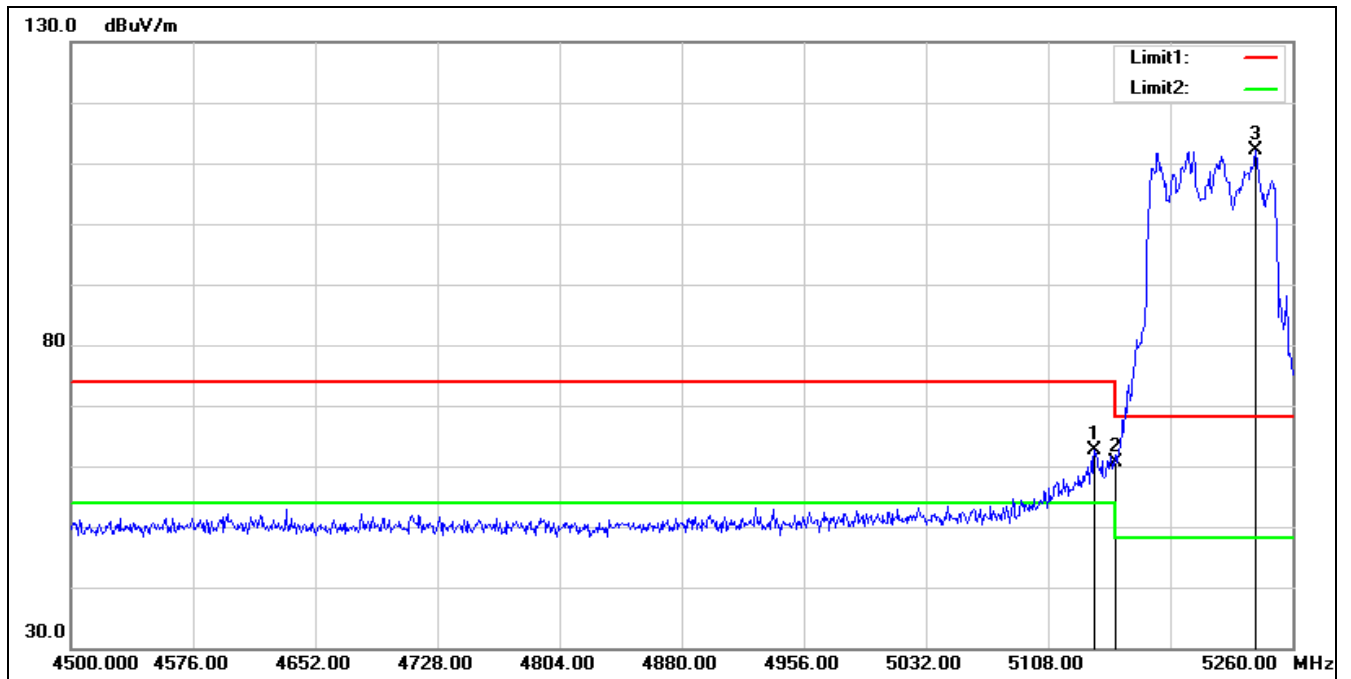

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.880	61.19	1.40	62.59	74.00	-11.41	peak
2	5150.000	59.30	1.38	60.68	74.00	-13.32	peak
3*	5237.200	111.31	0.88	112.19	68.20	43.99	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

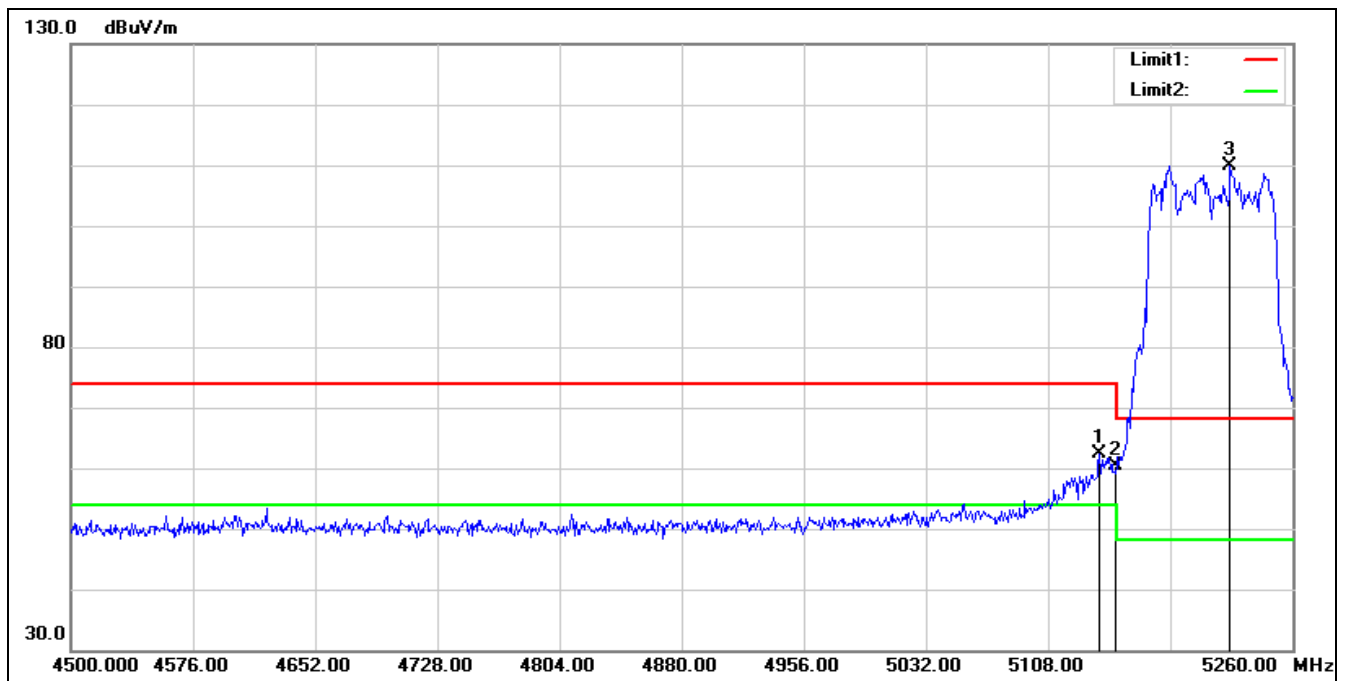


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.920	61.09	1.39	62.48	74.00	-11.52	peak
2	5150.000	59.07	1.38	60.45	74.00	-13.55	peak
3*	5221.240	108.88	1.00	109.88	68.20	41.68	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT80 5290 MHz

Remark:

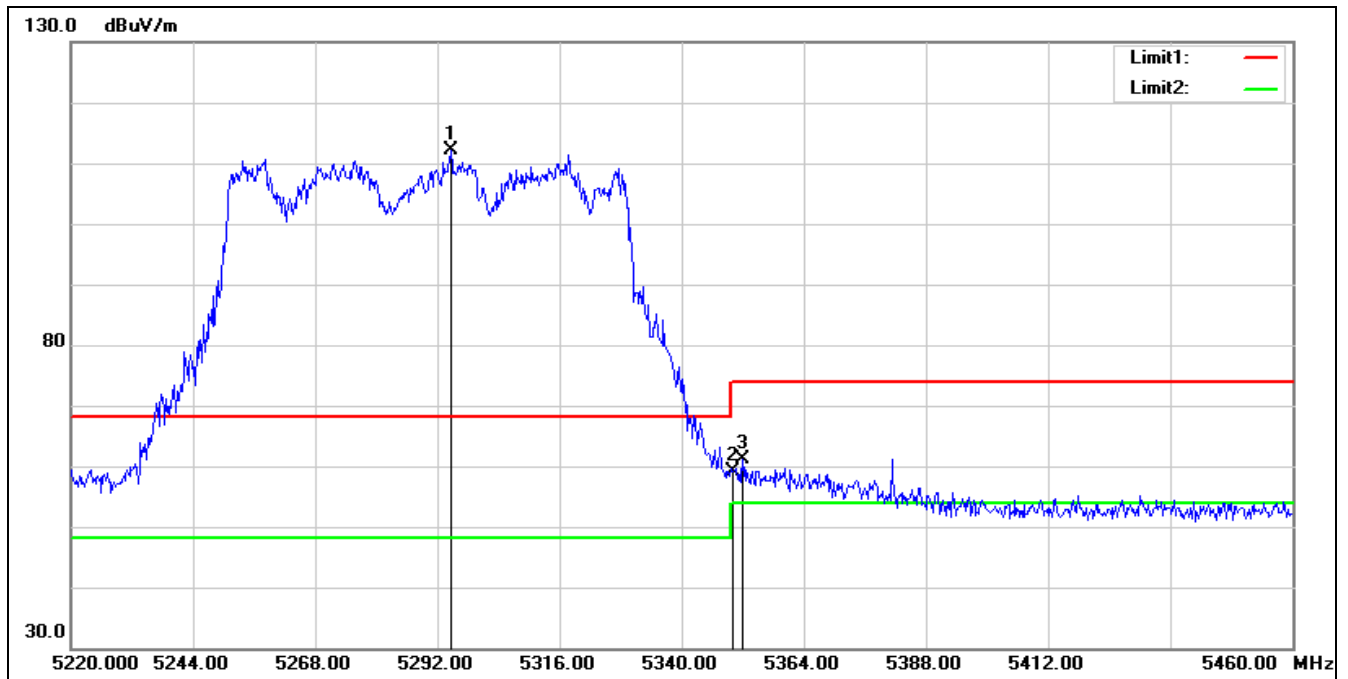


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5294.640	111.52	0.67	112.19	68.20	43.99	peak
2	5350.000	58.03	1.02	59.05	74.00	-14.95	peak
3	5352.000	60.06	1.03	61.09	74.00	-12.91	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT80 5290 MHz

Remark:

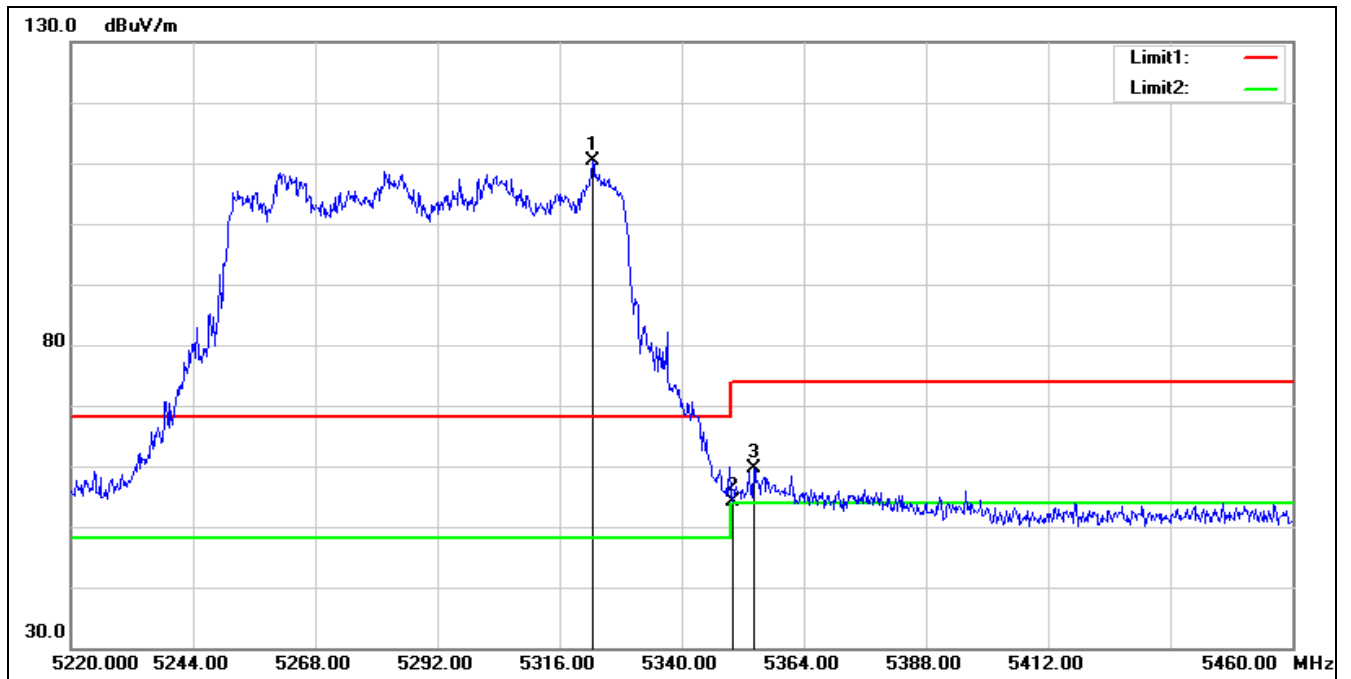


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.480	109.48	0.81	110.29	68.20	42.09	peak
2	5350.000	53.13	1.02	54.15	74.00	-19.85	peak
3	5354.160	58.53	1.04	59.57	74.00	-14.43	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5530 MHz

Remark:

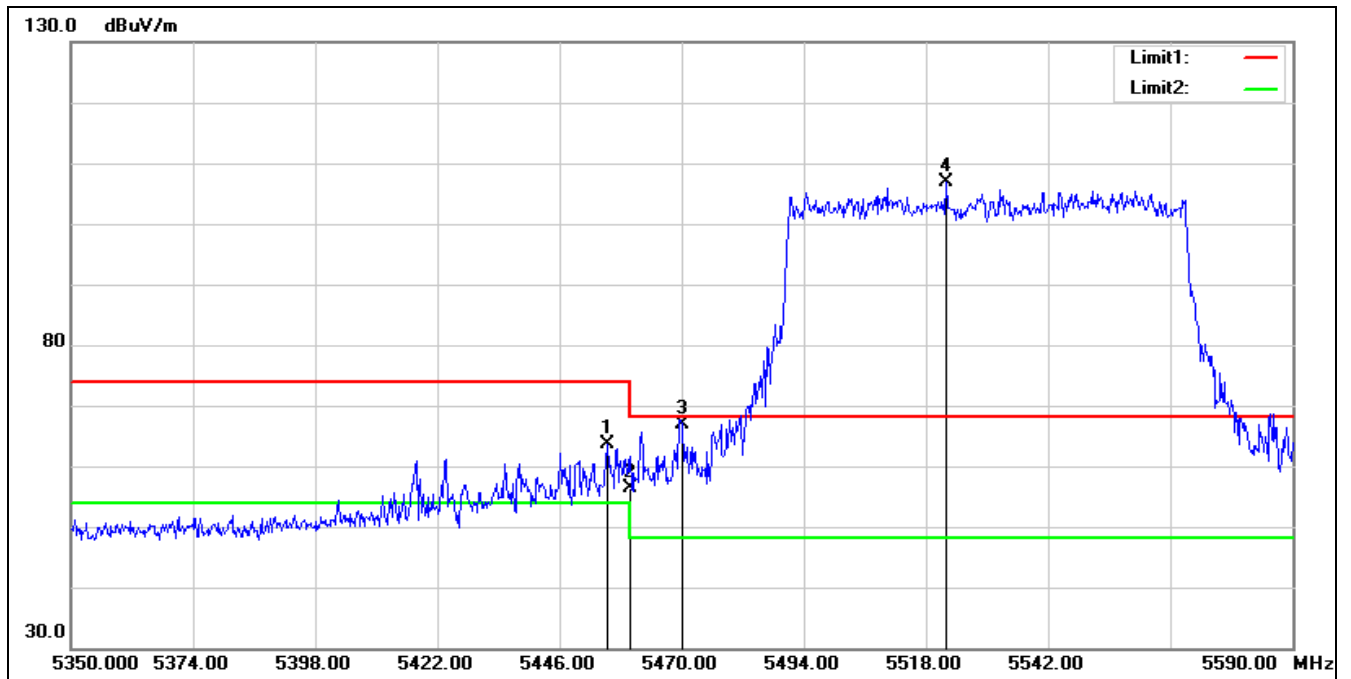


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.360	61.85	1.75	63.60	74.00	-10.40	peak
2	5460.000	54.73	1.75	56.48	74.00	-17.52	peak
3	5470.000	65.08	1.77	66.85	68.20	-1.35	peak
4*	5522.080	105.14	1.80	106.94	68.20	38.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5530 MHz		
Remark:			

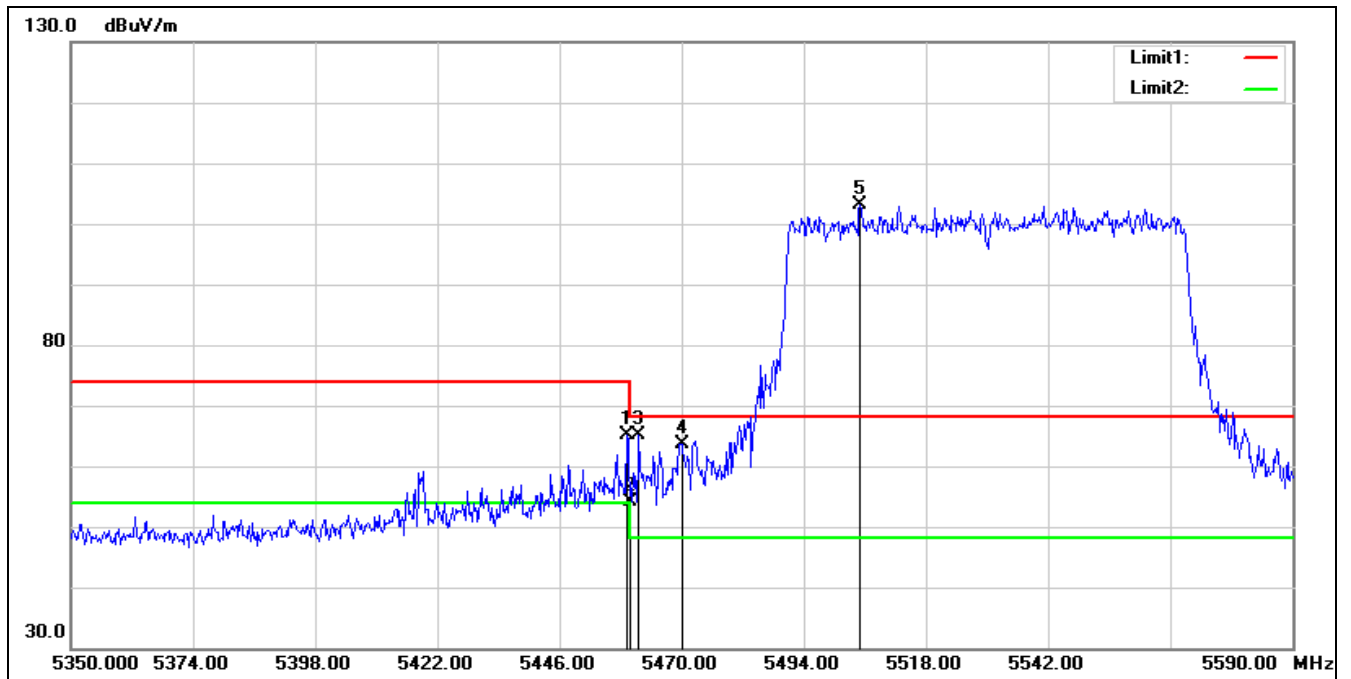

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	63.30	1.75	65.05	74.00	-8.95	peak
2	5460.000	52.41	1.75	54.16	74.00	-19.84	peak
3	5461.600	63.32	1.75	65.07	68.20	-3.13	peak
4	5470.000	61.83	1.77	63.60	68.20	-4.60	peak
5*	5505.040	101.25	1.79	103.04	68.20	34.84	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

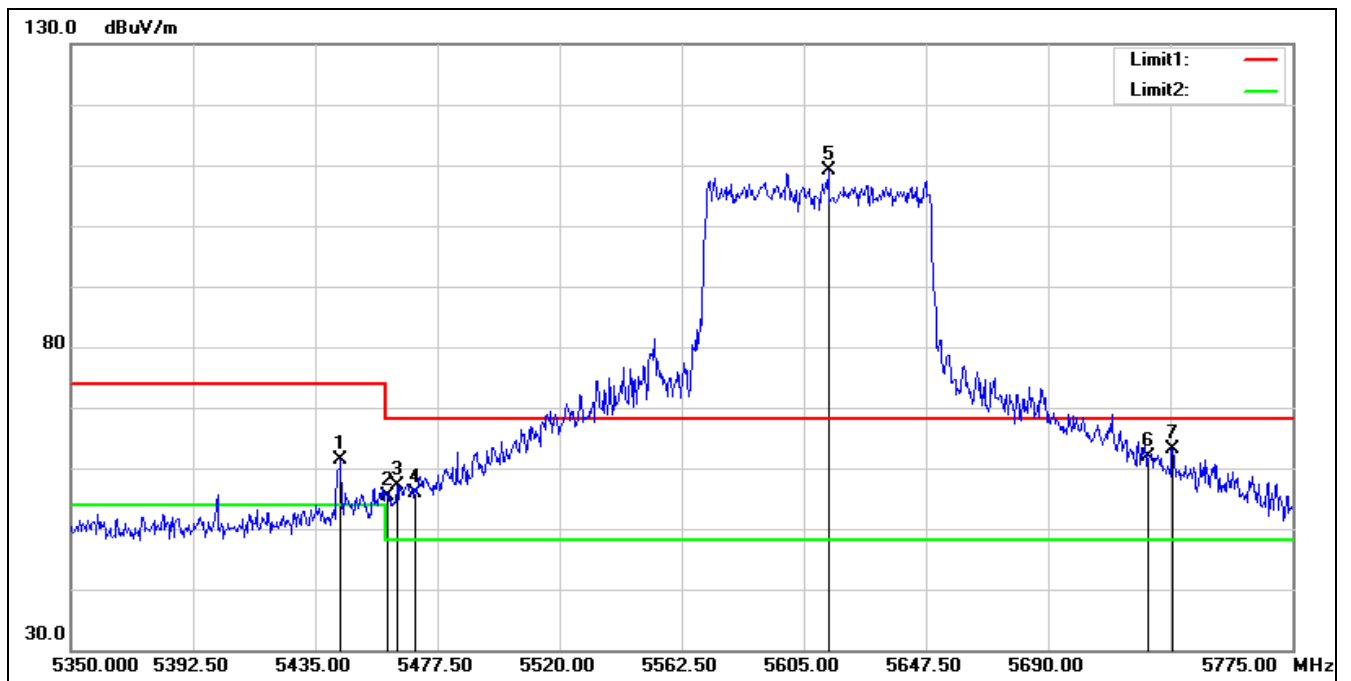

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5443.925	59.75	1.69	61.44	74.00	-12.56	peak
2	5460.000	53.59	1.75	55.34	74.00	-18.66	peak
3	5463.475	55.44	1.75	57.19	68.20	-11.01	peak
4	5470.000	54.09	1.77	55.86	68.20	-12.34	peak
5*	5613.500	107.62	1.63	109.25	68.20	41.05	peak
6	5725.000	60.05	1.78	61.83	68.20	-6.37	peak
7	5733.350	61.29	1.86	63.15	68.20	-5.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

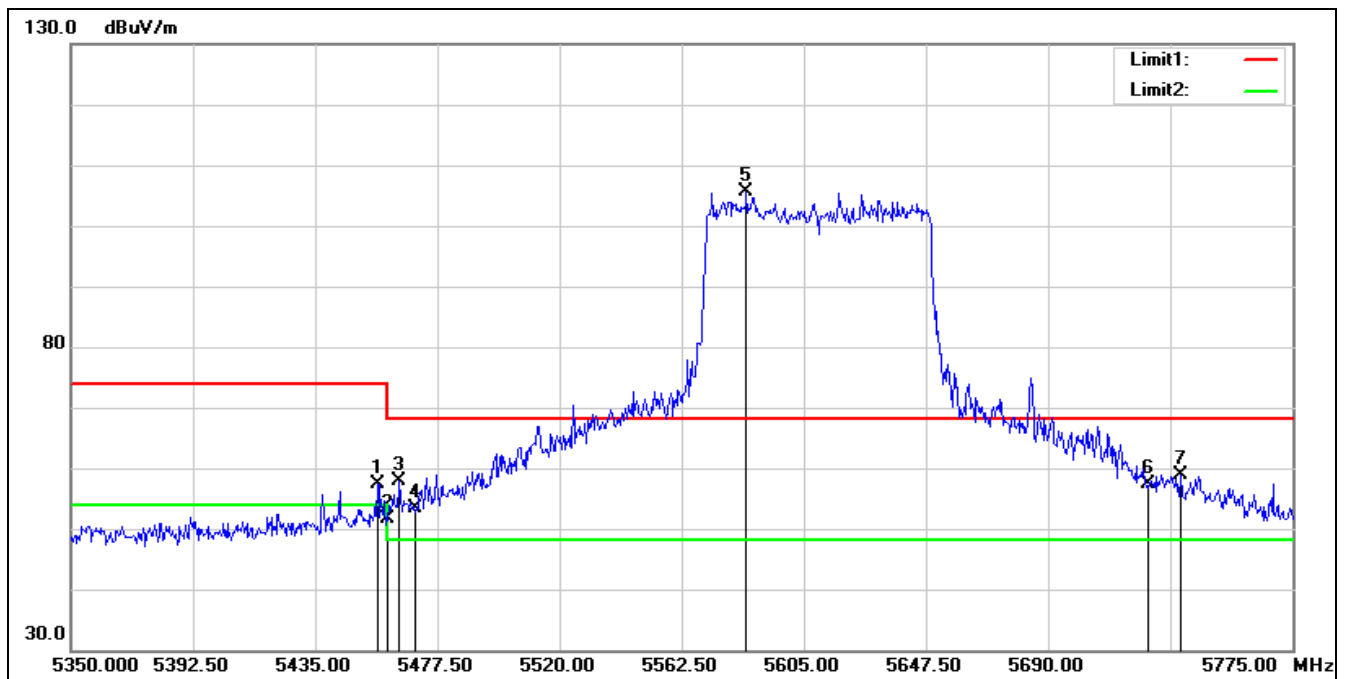

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.675	55.68	1.75	57.43	74.00	-16.57	peak
2	5460.000	49.89	1.75	51.64	74.00	-22.36	peak
3	5464.325	56.25	1.75	58.00	68.20	-10.20	peak
4	5470.000	51.59	1.77	53.36	68.20	-14.84	peak
5*	5585.025	103.82	1.70	105.52	68.20	37.32	peak
6	5725.000	55.71	1.78	57.49	68.20	-10.71	peak
7	5736.325	56.99	1.89	58.88	68.20	-9.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5690 MHz

Remark:

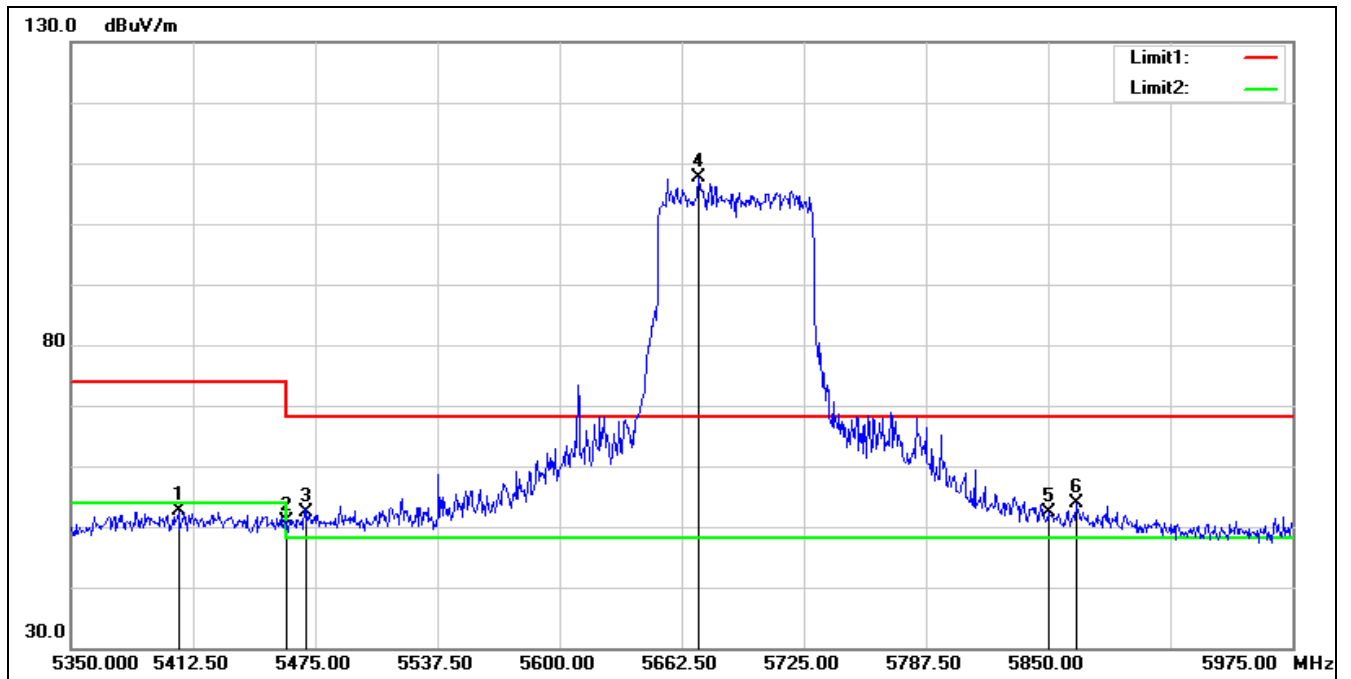

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5405.000	51.26	1.41	52.67	74.00	-21.33	peak
2	5460.000	49.12	1.75	50.87	74.00	-23.13	peak
3	5470.000	50.58	1.77	52.35	68.20	-15.85	peak
4*	5671.250	106.05	1.55	107.60	68.20	39.40	peak
5	5850.000	50.06	2.29	52.35	68.20	-15.85	peak
6	5864.375	51.55	2.32	53.87	68.20	-14.33	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

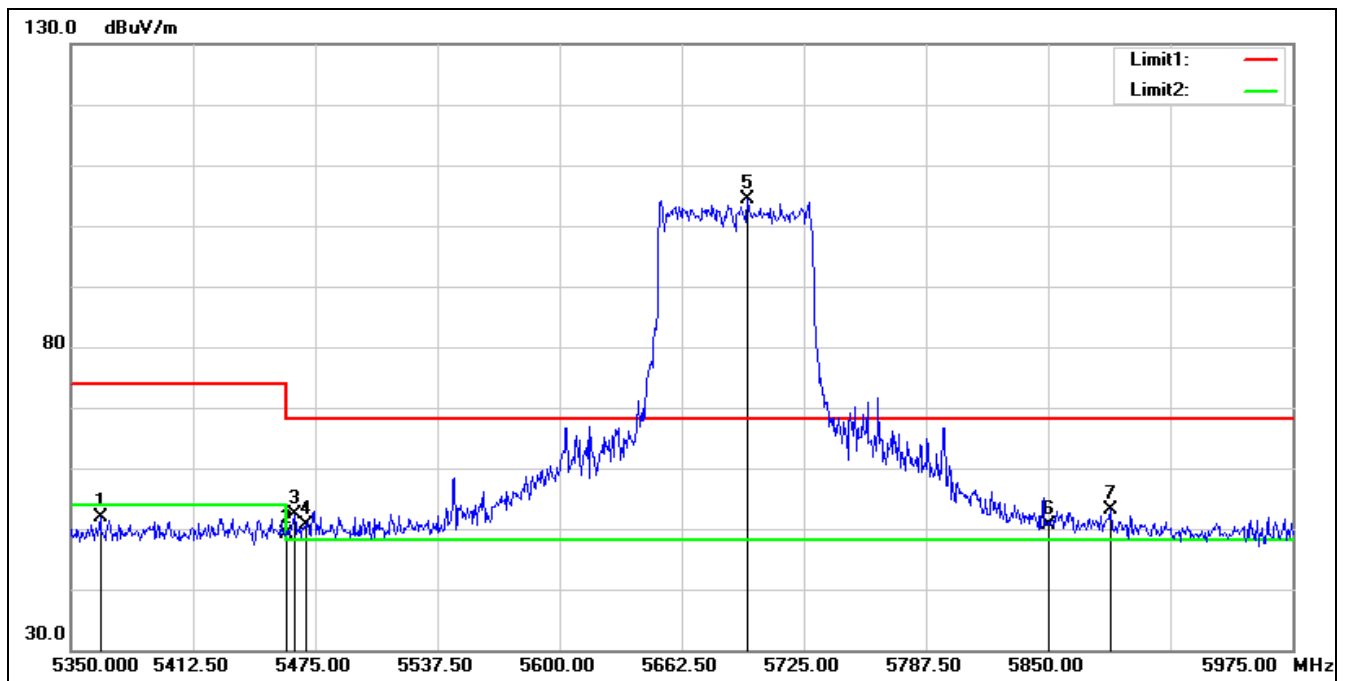

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5365.000	50.69	1.13	51.82	74.00	-22.18	peak
2	5460.000	47.50	1.75	49.25	74.00	-24.75	peak
3	5464.375	50.59	1.75	52.34	68.20	-15.86	peak
4	5470.000	48.82	1.77	50.59	68.20	-17.61	peak
5*	5696.250	102.85	1.54	104.39	68.20	36.19	peak
6	5850.000	48.24	2.29	50.53	68.20	-17.67	peak
7	5881.875	50.75	2.34	53.09	68.20	-15.11	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

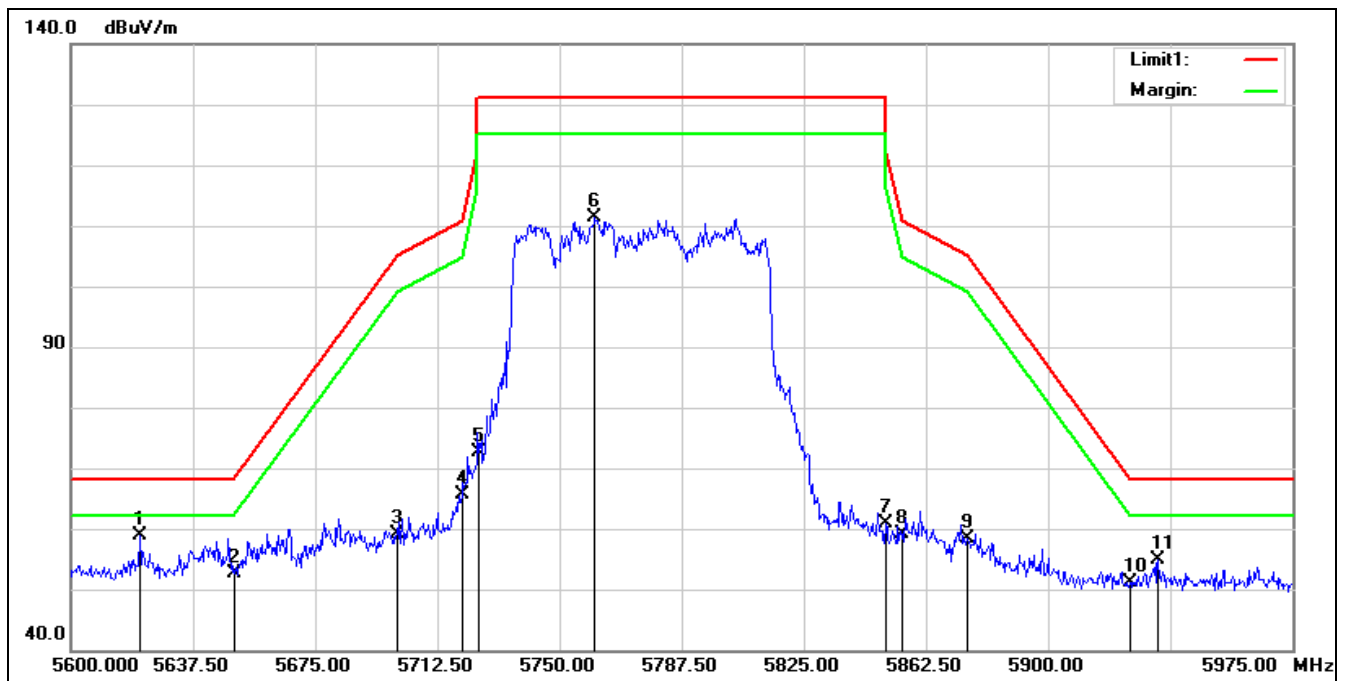

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5621.375	57.16	1.63	58.79	68.20	-9.41	peak
2	5650.000	51.04	1.56	52.60	68.20	-15.60	peak
3	5700.000	57.54	1.54	59.08	105.20	-46.12	peak
4	5720.000	64.01	1.74	65.75	110.80	-45.05	peak
5	5725.000	70.91	1.78	72.69	122.20	-49.51	peak
6	5760.875	109.27	2.06	111.33	131.20	-19.87	peak
7	5850.000	58.61	2.29	60.90	122.20	-61.30	peak
8	5855.000	56.81	2.31	59.12	110.80	-51.68	peak
9	5875.000	56.03	2.34	58.37	105.20	-46.83	peak
10	5925.000	48.96	2.23	51.19	68.20	-17.01	peak
11	5933.750	52.65	2.17	54.82	68.20	-13.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			

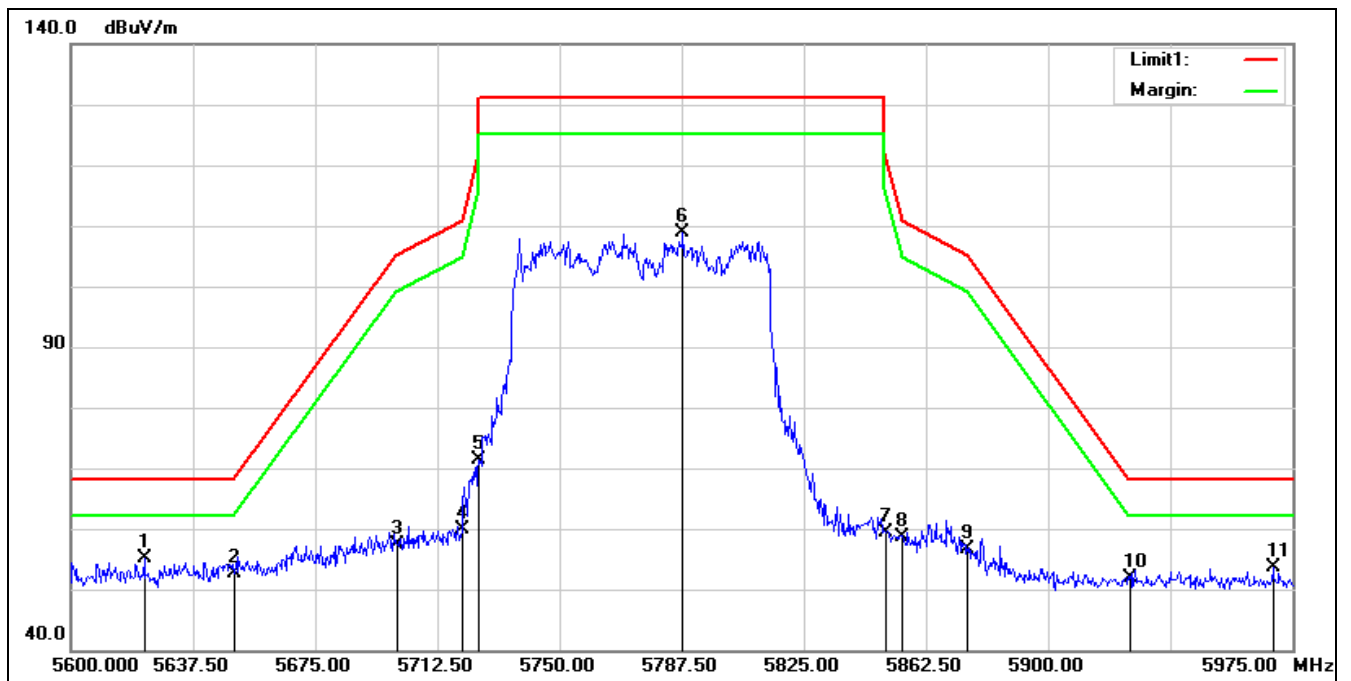

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5775 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5622.500	53.50	1.62	55.12	68.20	-13.08	peak
2	5650.000	51.13	1.56	52.69	68.20	-15.51	peak
3	5700.000	55.89	1.54	57.43	105.20	-47.77	peak
4	5720.000	58.17	1.74	59.91	110.80	-50.89	peak
5	5725.000	69.49	1.78	71.27	122.20	-50.93	peak
6	5787.875	106.62	2.17	108.79	131.20	-22.41	peak
7	5850.000	57.19	2.29	59.48	122.20	-62.72	peak
8	5855.000	56.41	2.31	58.72	110.80	-52.08	peak
9	5875.000	54.40	2.34	56.74	105.20	-48.46	peak
10	5925.000	49.75	2.23	51.98	68.20	-16.22	peak
11	5969.000	51.41	2.10	53.51	68.20	-14.69	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT160 5250 MHz

Remark:

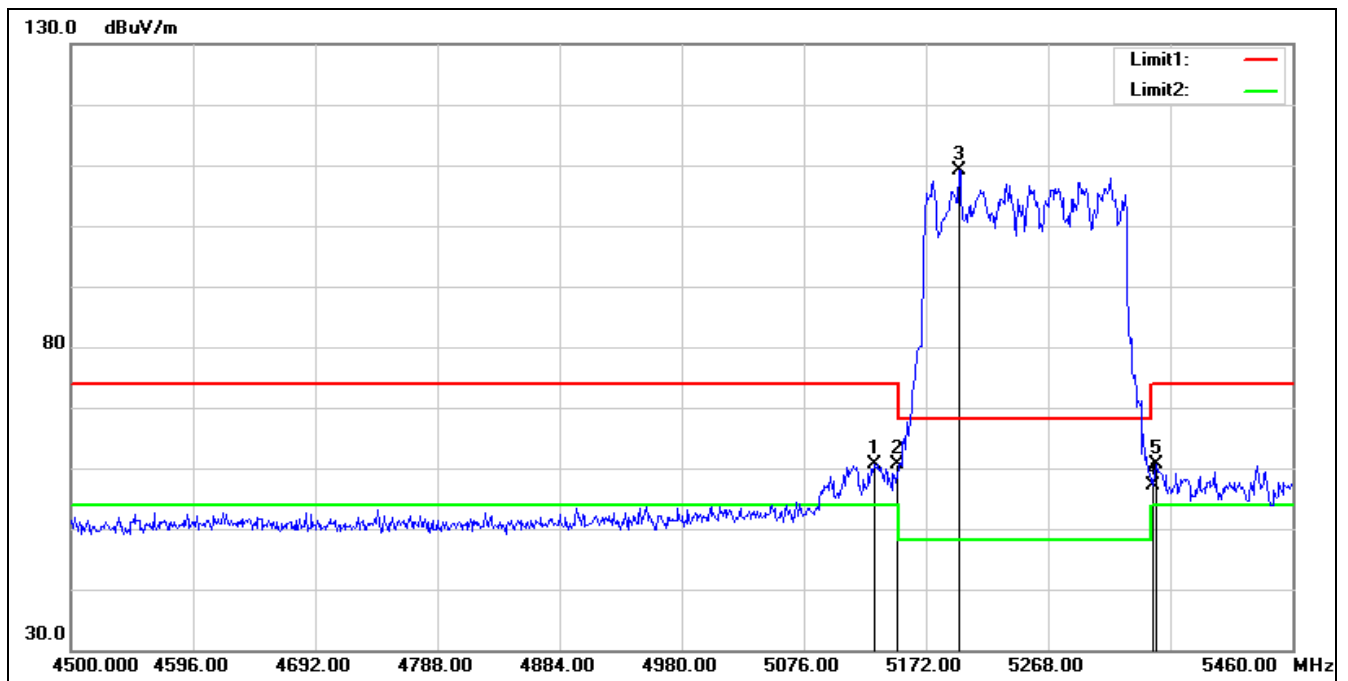


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.680	59.34	1.39	60.73	74.00	-13.27	peak
2	5150.000	59.25	1.38	60.63	74.00	-13.37	peak
3*	5197.920	107.94	1.15	109.09	68.20	40.89	peak
4	5350.000	56.10	1.02	57.12	74.00	-16.88	peak
5	5353.440	59.55	1.04	60.59	74.00	-13.41	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT160 5250 MHz

Remark:

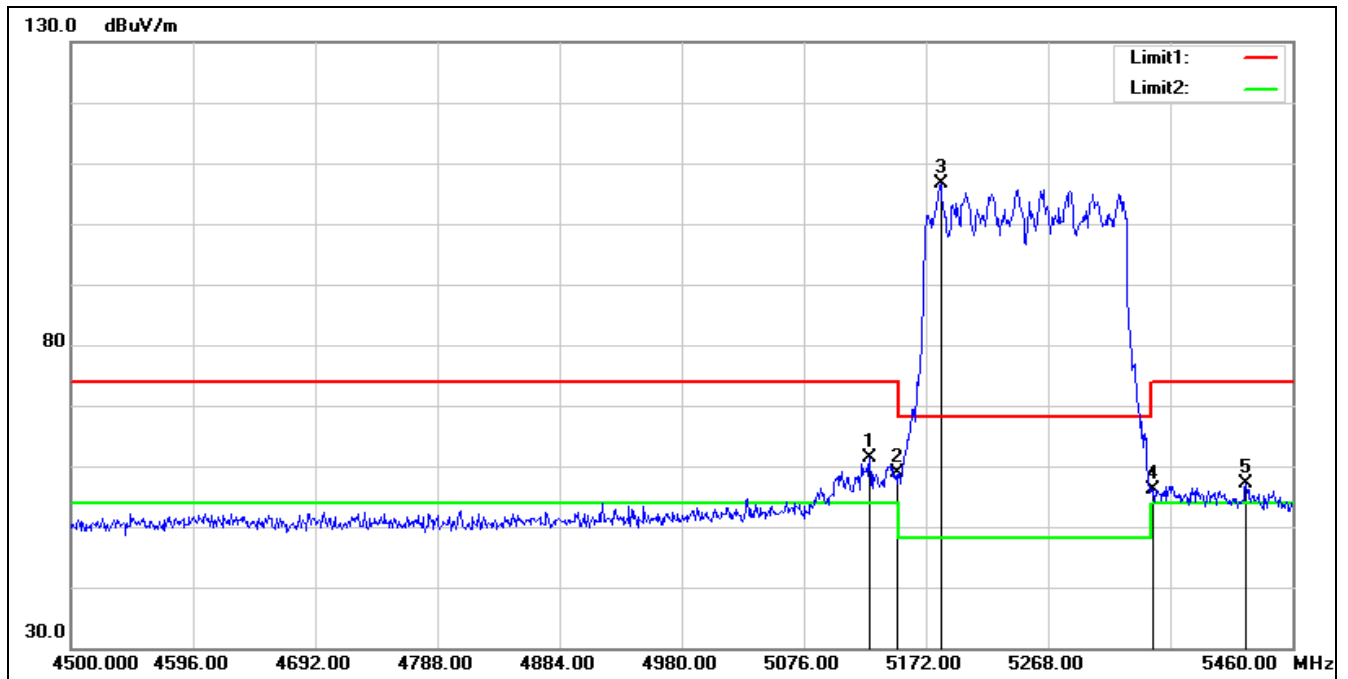

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.840	60.01	1.39	61.40	74.00	-12.60	peak
2	5150.000	57.40	1.38	58.78	74.00	-15.22	peak
3*	5183.520	105.40	1.22	106.62	68.20	38.42	peak
4	5350.000	55.02	1.02	56.04	74.00	-17.96	peak
5	5423.520	55.57	1.54	57.11	74.00	-16.89	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

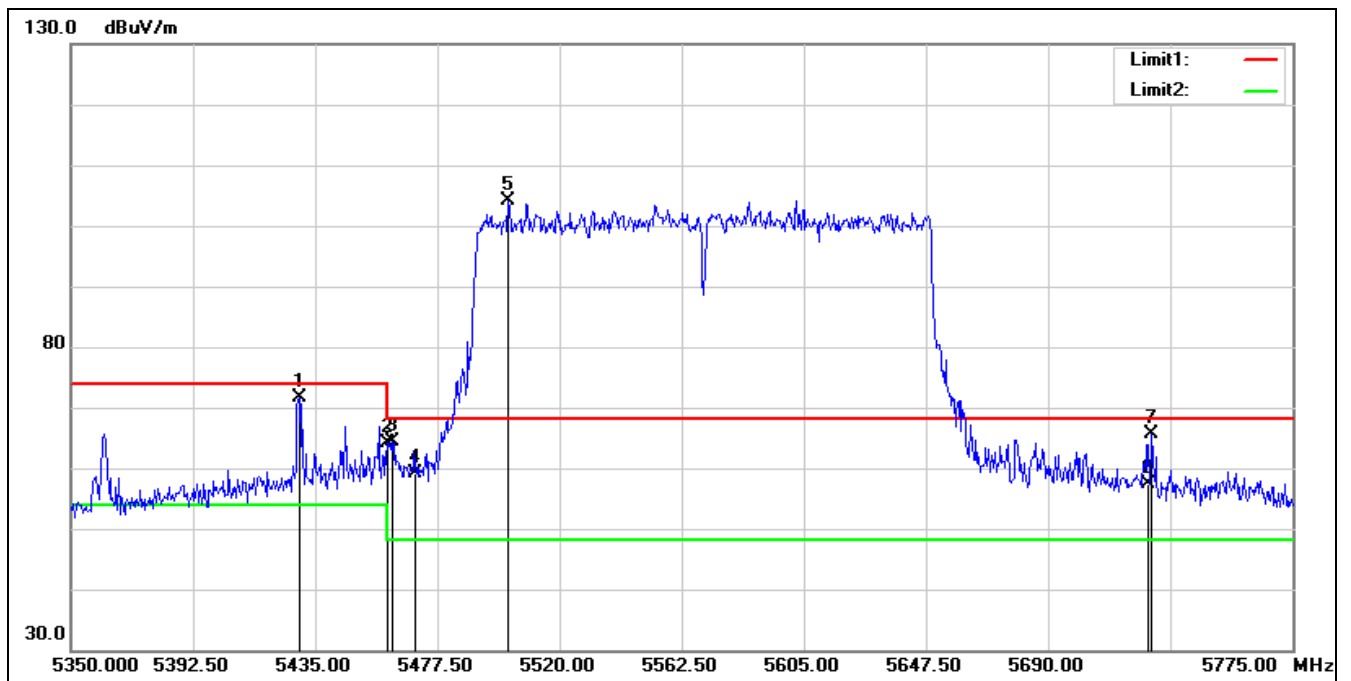

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.475	70.05	1.60	71.65	74.00	-2.35	peak
2	5460.000	62.27	1.75	64.02	74.00	-9.98	peak
3	5461.775	62.61	1.75	64.36	68.20	-3.84	peak
4	5470.000	57.38	1.77	59.15	68.20	-9.05	peak
5*	5502.150	102.30	1.80	104.10	68.20	35.90	peak
6	5725.000	55.61	1.78	57.39	68.20	-10.81	peak
7	5726.125	63.74	1.79	65.53	68.20	-2.67	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

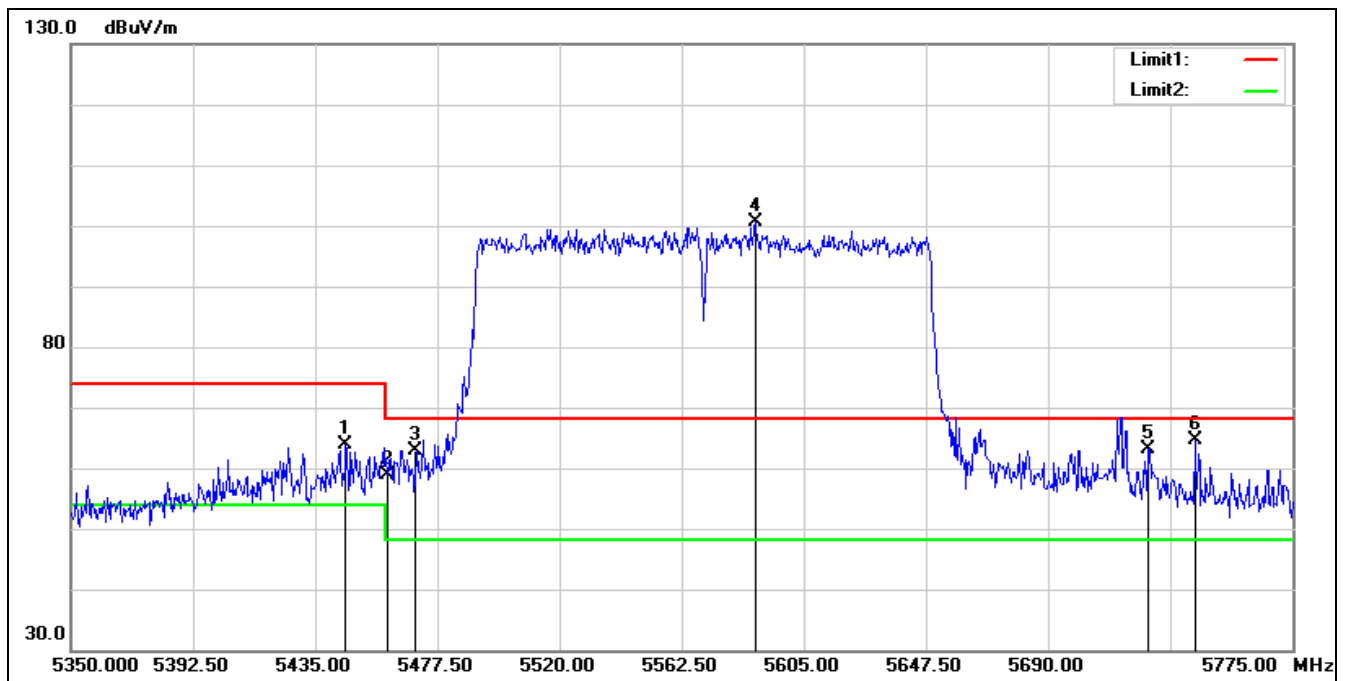

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5445.625	62.27	1.70	63.97	74.00	-10.03	peak
2	5460.000	57.17	1.75	58.92	74.00	-15.08	peak
3	5470.000	61.03	1.77	62.80	68.20	-5.40	peak
4*	5588.000	98.96	1.69	100.65	68.20	32.45	peak
5	5725.000	61.46	1.78	63.24	68.20	-4.96	peak
6	5741.000	62.58	1.93	64.51	68.20	-3.69	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5180 MHz
Remark:

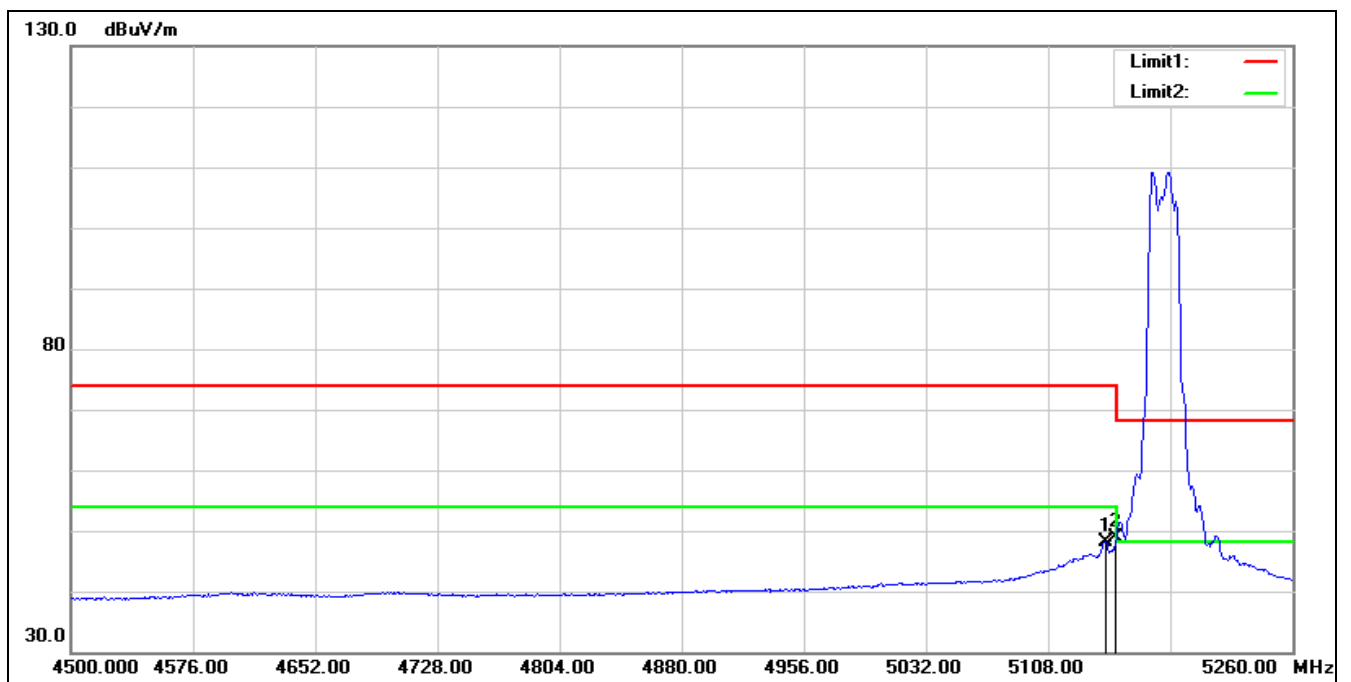


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	46.82	1.38	48.20	54.00	-5.80	AVG
2*	5150.000	47.47	1.38	48.85	54.00	-5.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5180 MHz		
Remark:			

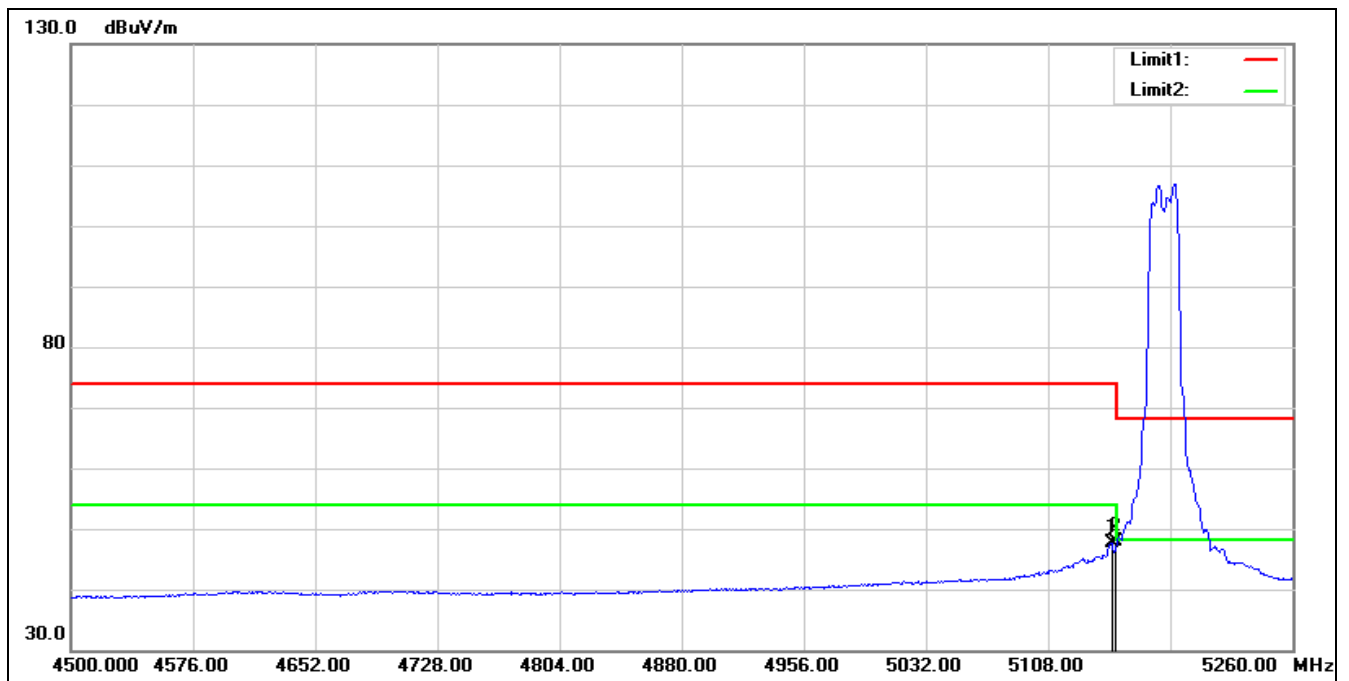


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	46.24	1.38	47.62	54.00	-6.38	AVG
2*	5150.000	46.61	1.38	47.99	54.00	-6.01	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5200 MHz
Remark:

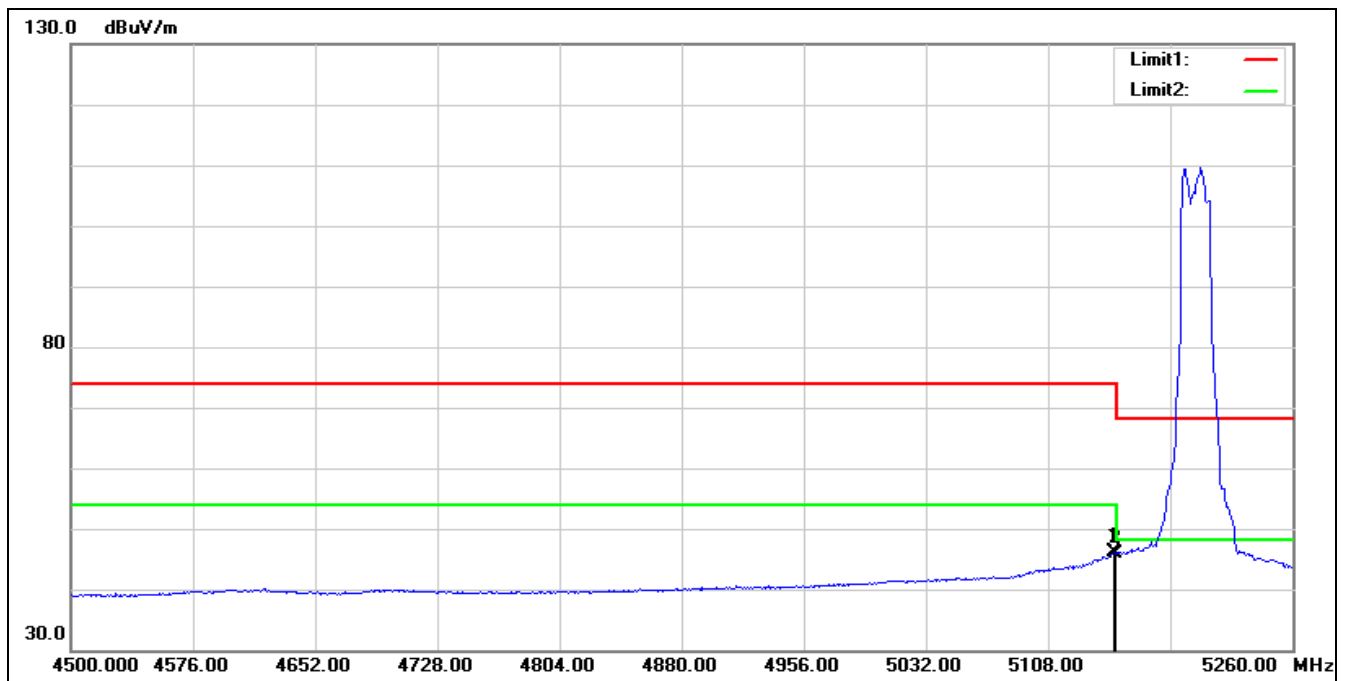


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5149.040	44.63	1.38	46.01	54.00	-7.99	AVG
2	5150.000	44.60	1.38	45.98	54.00	-8.02	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5200 MHz
Remark:

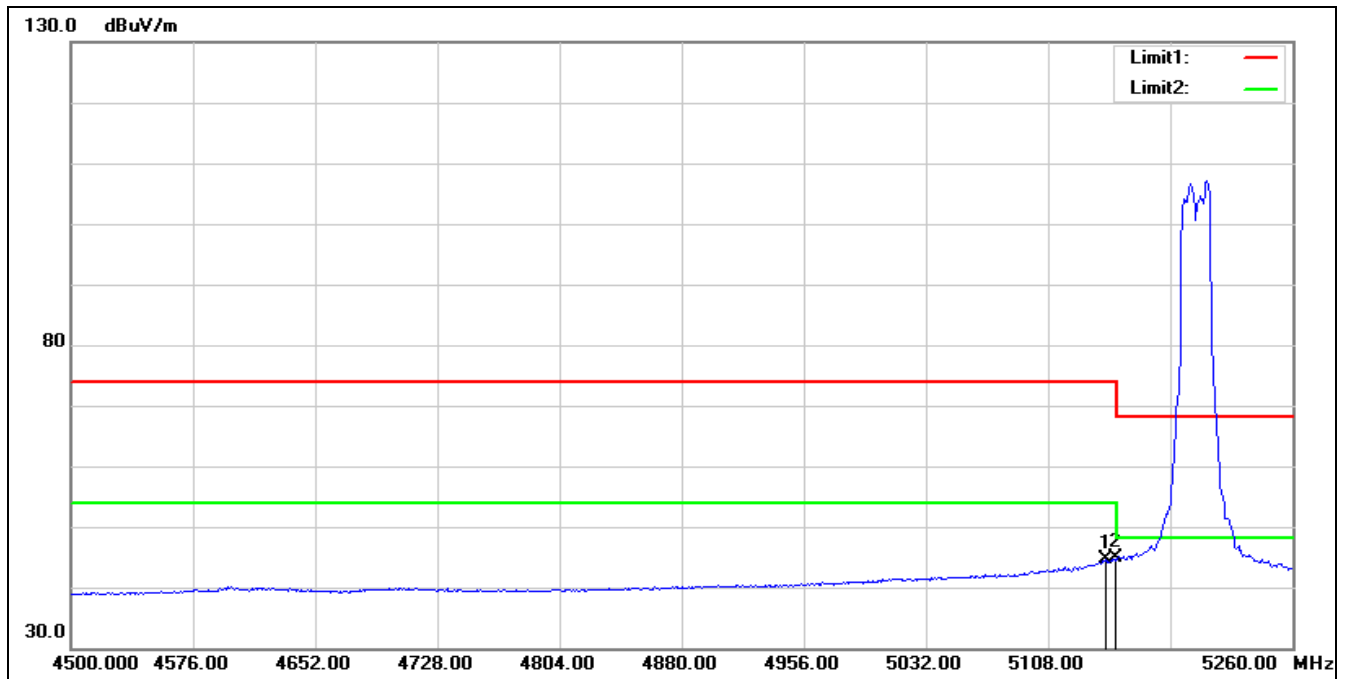


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	43.30	1.38	44.68	54.00	-9.32	AVG
2*	5150.000	43.46	1.38	44.84	54.00	-9.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5240 MHz		
Remark:			

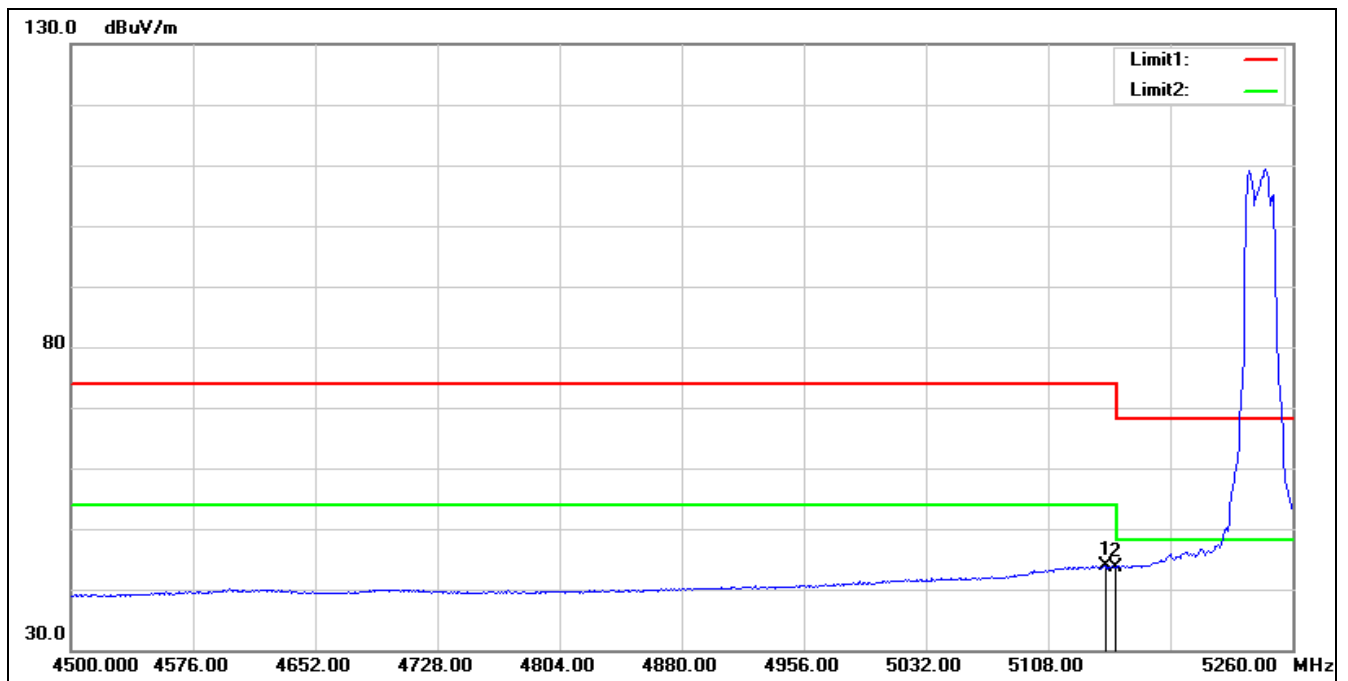


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5143.720	42.57	1.38	43.95	54.00	-10.05	AVG
2	5150.000	42.24	1.38	43.62	54.00	-10.38	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5240 MHz
Remark:

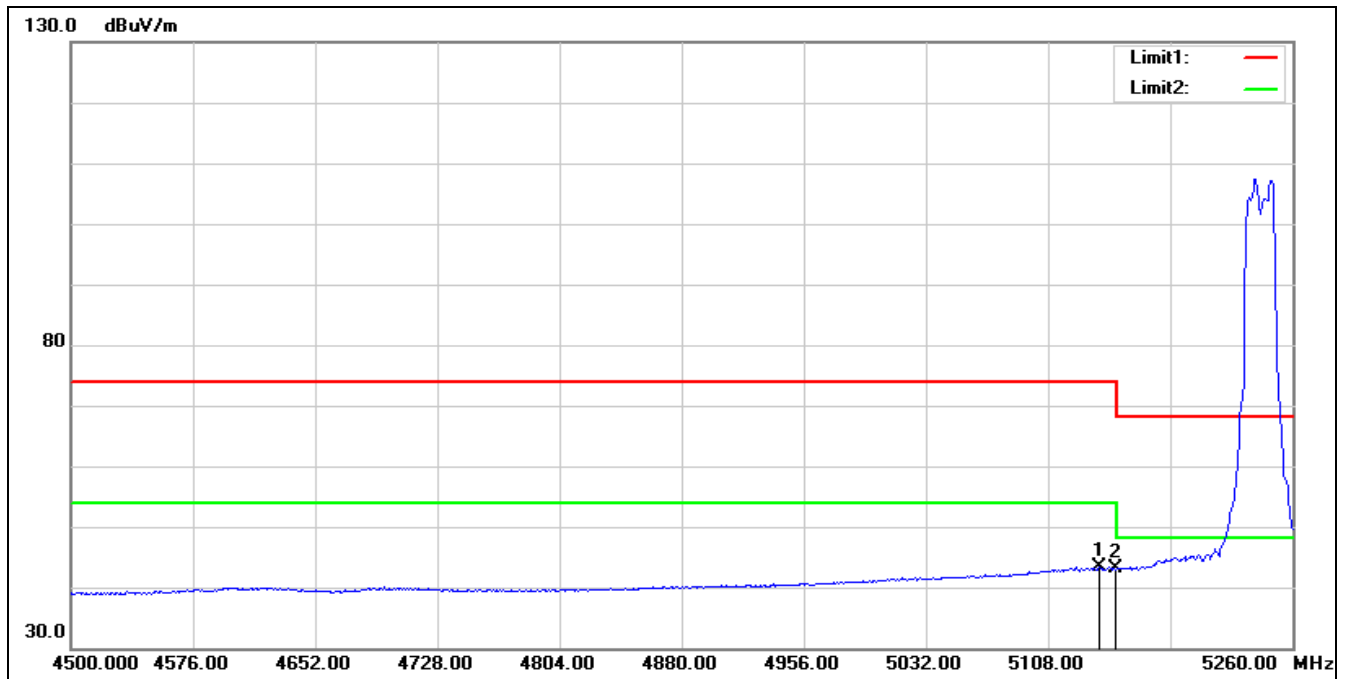


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5139.920	41.91	1.39	43.30	54.00	-10.70	AVG
2	5150.000	41.71	1.38	43.09	54.00	-10.91	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11a 5260 MHz
Remark:

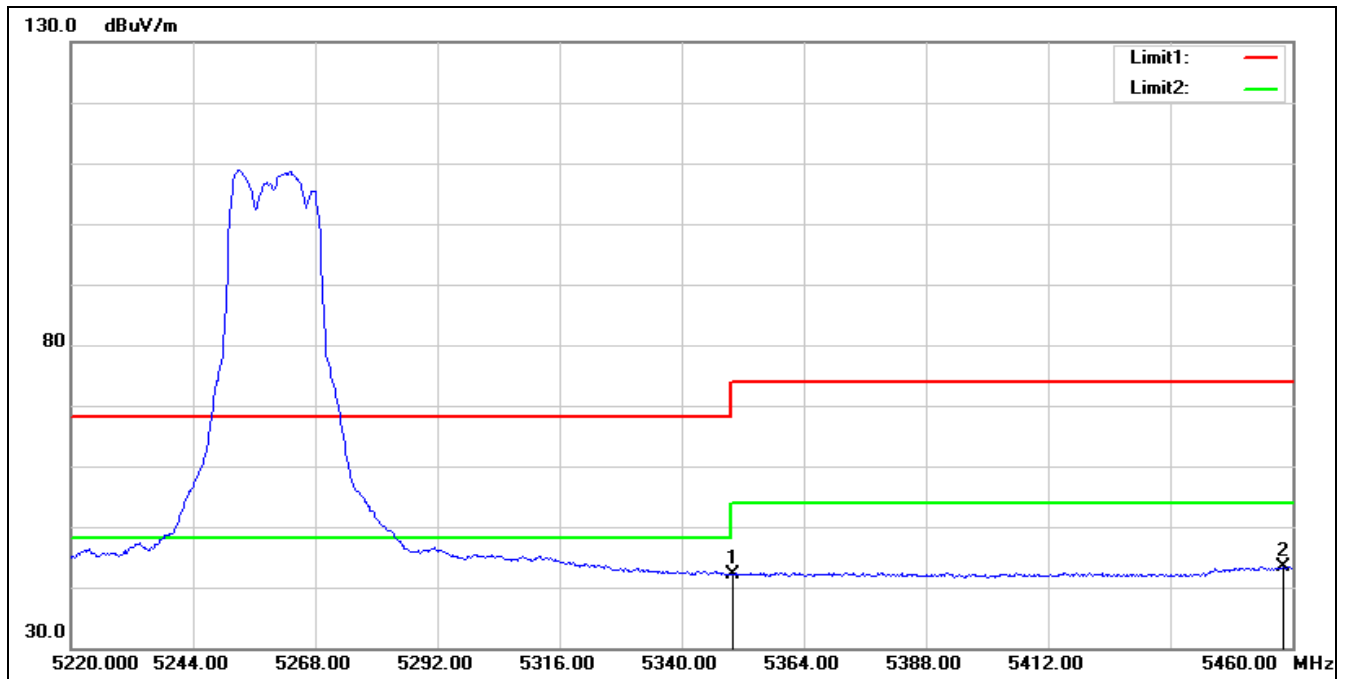

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.01	1.02	42.03	54.00	-11.97	AVG
2*	5458.080	41.59	1.75	43.34	54.00	-10.66	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11a 5260 MHz
Remark:

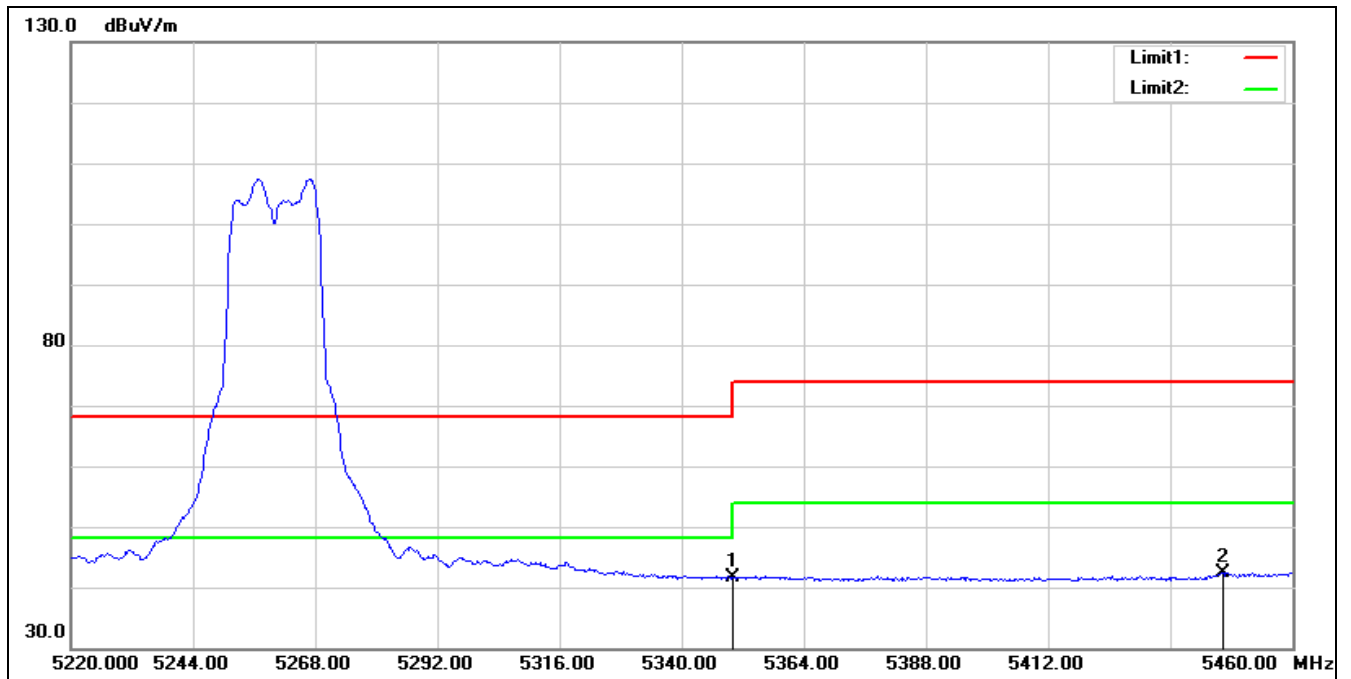


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.73	1.02	41.75	54.00	-12.25	AVG
2*	5446.320	40.69	1.71	42.40	54.00	-11.60	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11a 5280 MHz

Remark:

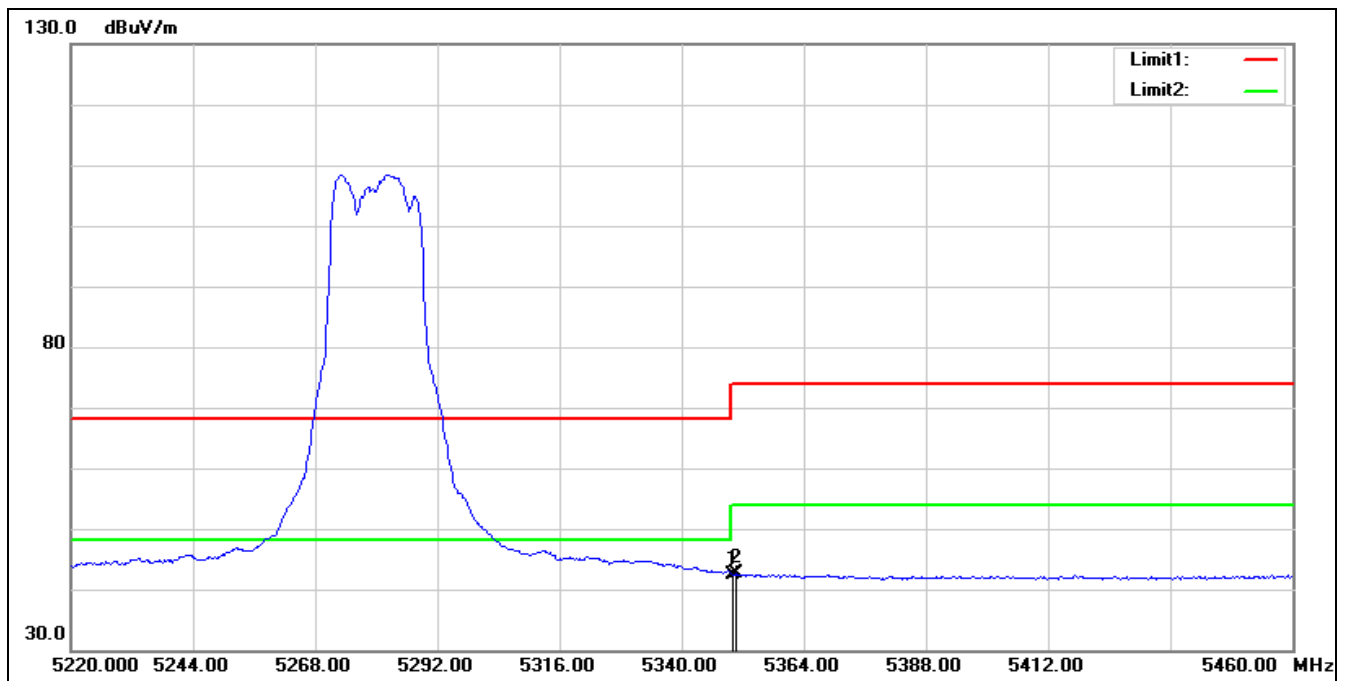


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.44	1.02	42.46	54.00	-11.54	AVG
2*	5350.800	41.56	1.02	42.58	54.00	-11.42	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5280 MHz		
Remark:			

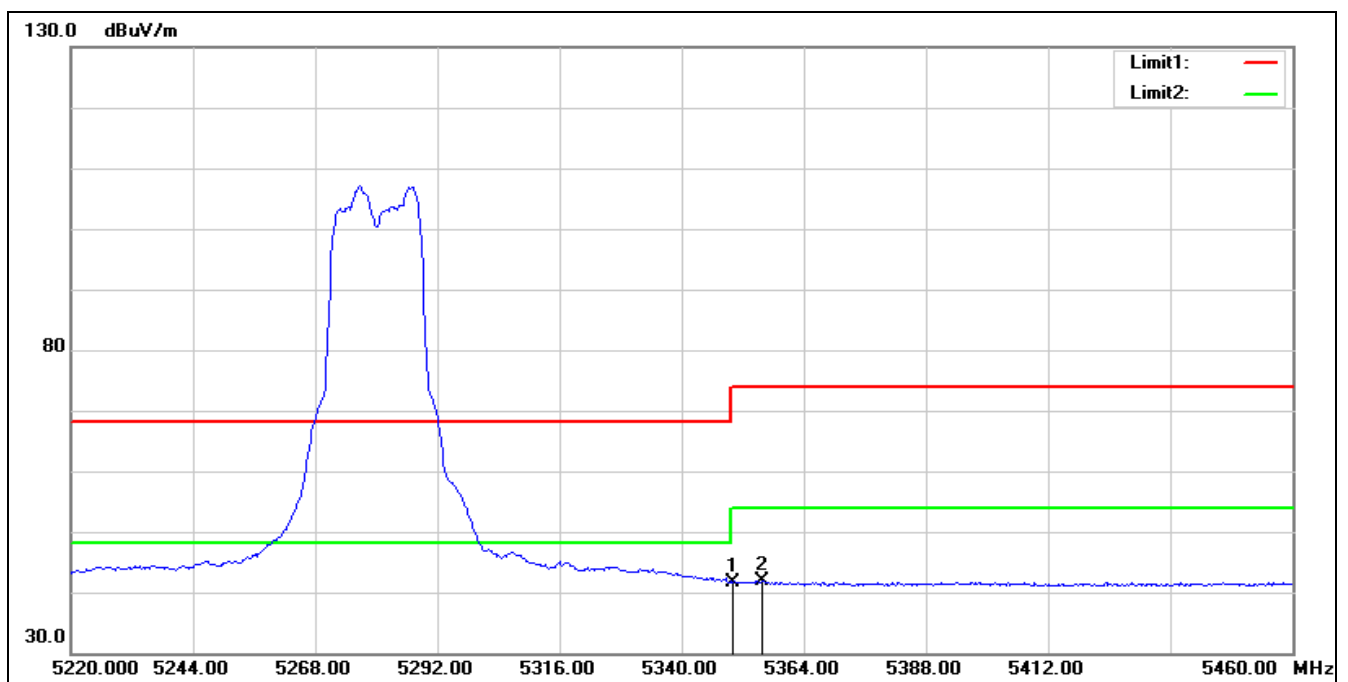


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.70	1.02	41.72	54.00	-12.28	AVG
2*	5355.840	40.76	1.07	41.83	54.00	-12.17	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5320 MHz		
Remark:			

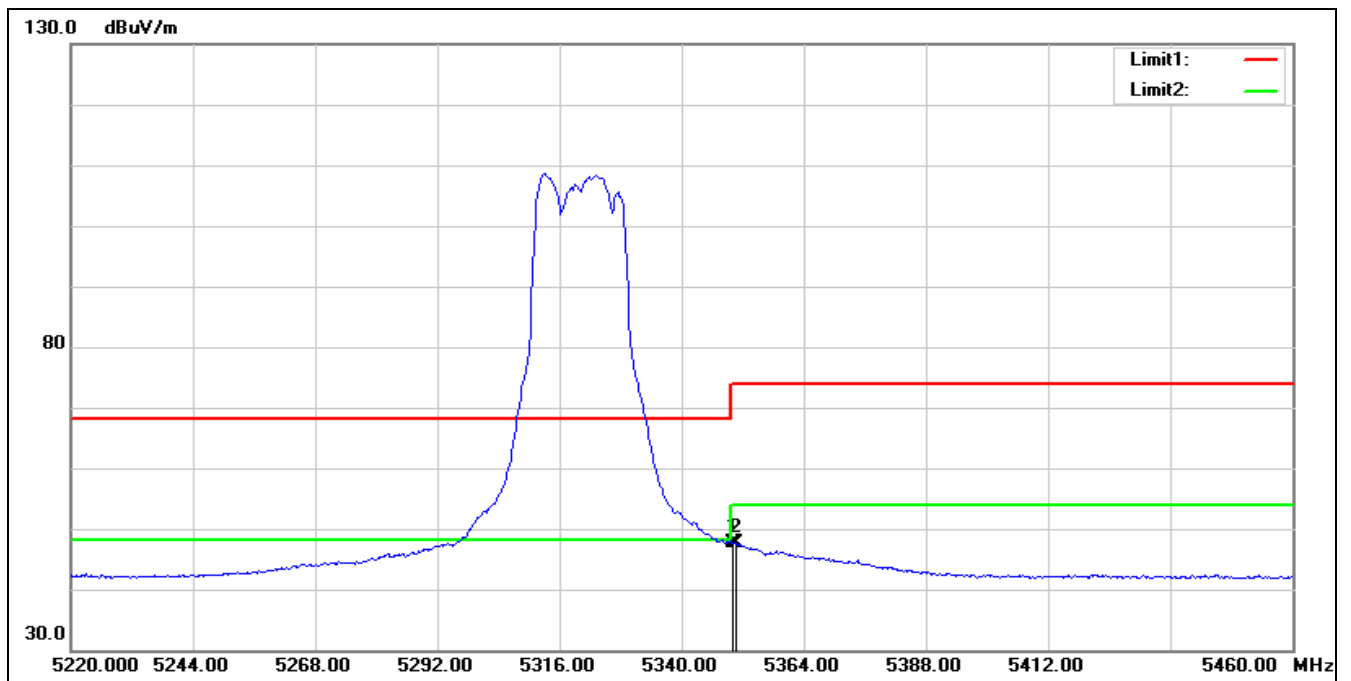


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	46.62	1.02	47.64	54.00	-6.36	AVG
2	5350.560	46.57	1.02	47.59	54.00	-6.41	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5320 MHz		
Remark:			

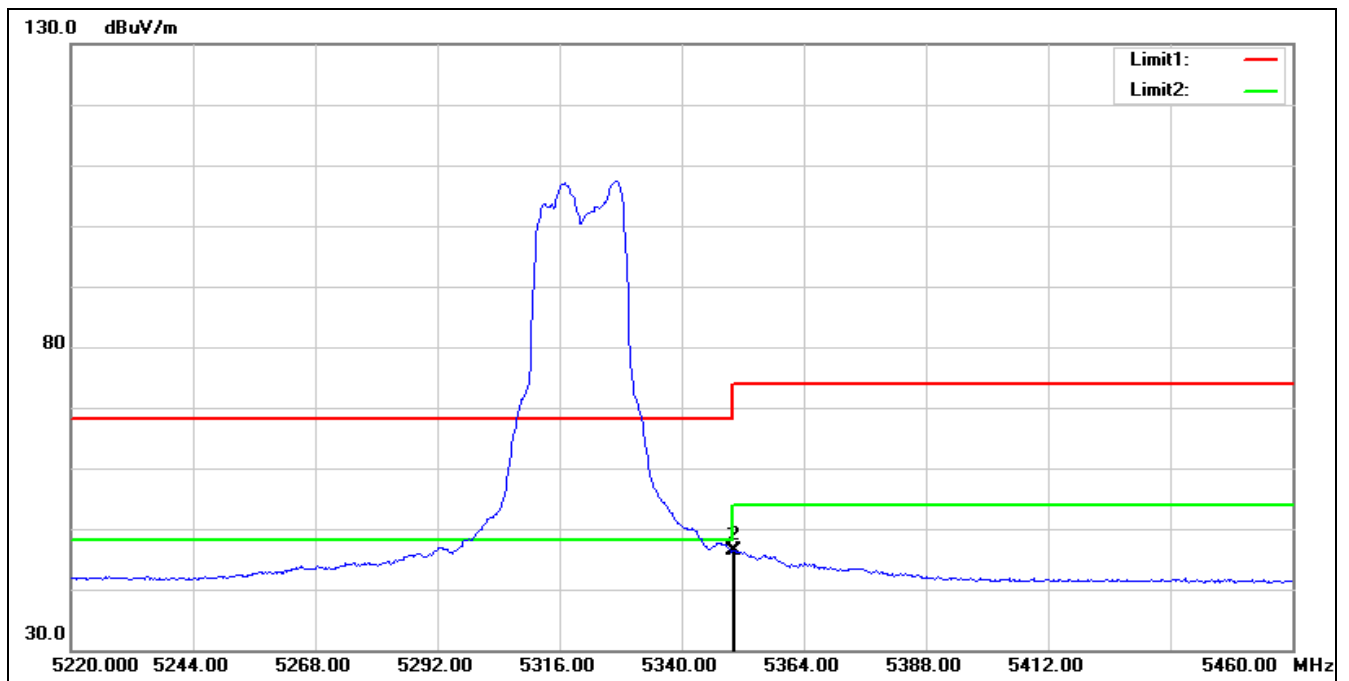


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	45.38	1.02	46.40	54.00	-7.60	AVG
2	5350.320	45.34	1.02	46.36	54.00	-7.64	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5500 MHz		
Remark:			

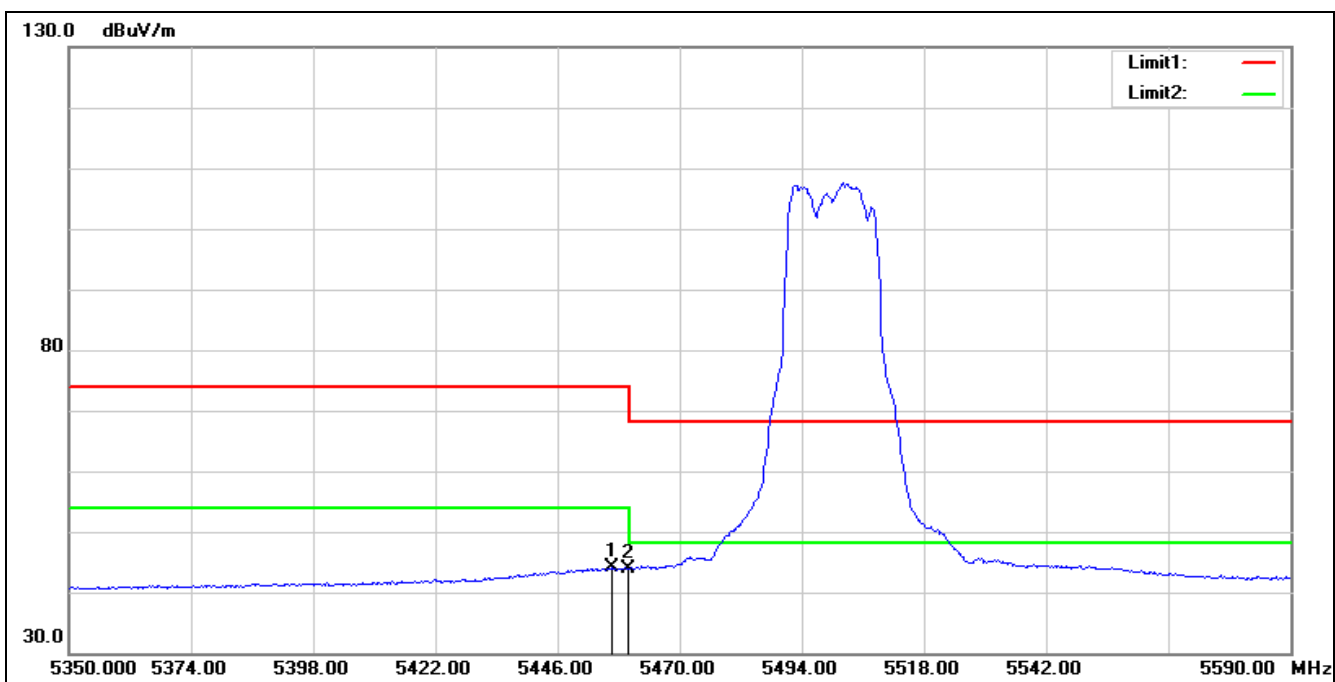


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.800	42.27	1.75	44.02	54.00	-9.98	AVG
2	5460.000	42.16	1.75	43.91	54.00	-10.09	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5500 MHz		
Remark:			

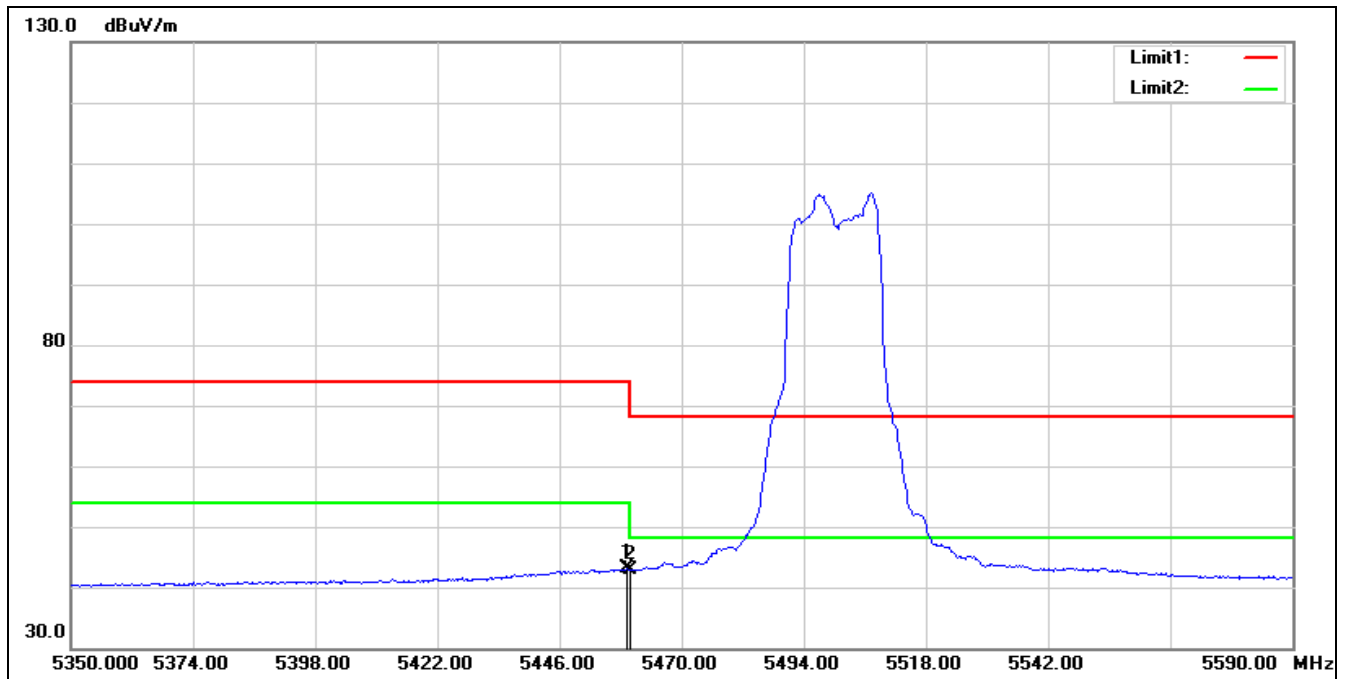


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5459.200	41.26	1.75	43.01	54.00	-10.99	AVG
2	5460.000	41.07	1.75	42.82	54.00	-11.18	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5560 MHz		
Remark:			

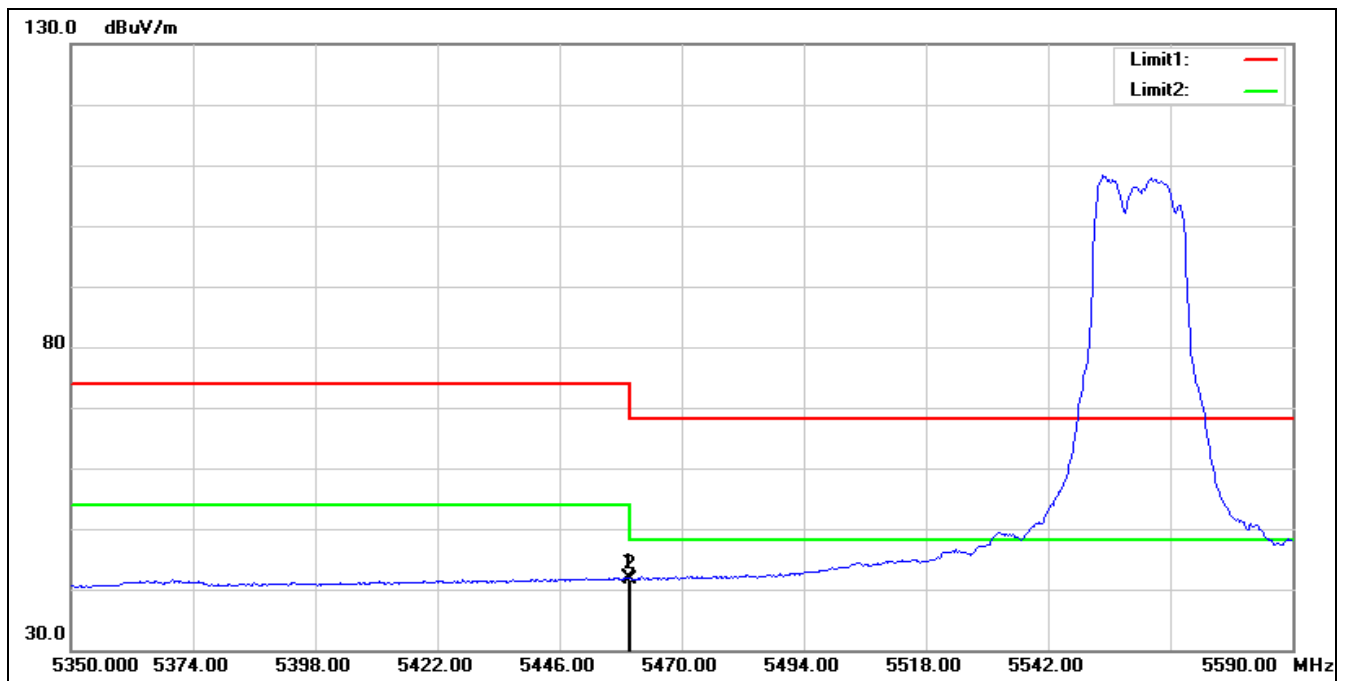


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5459.440	40.18	1.75	41.93	54.00	-12.07	AVG
2	5460.000	39.89	1.75	41.64	54.00	-12.36	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5560 MHz		
Remark:			

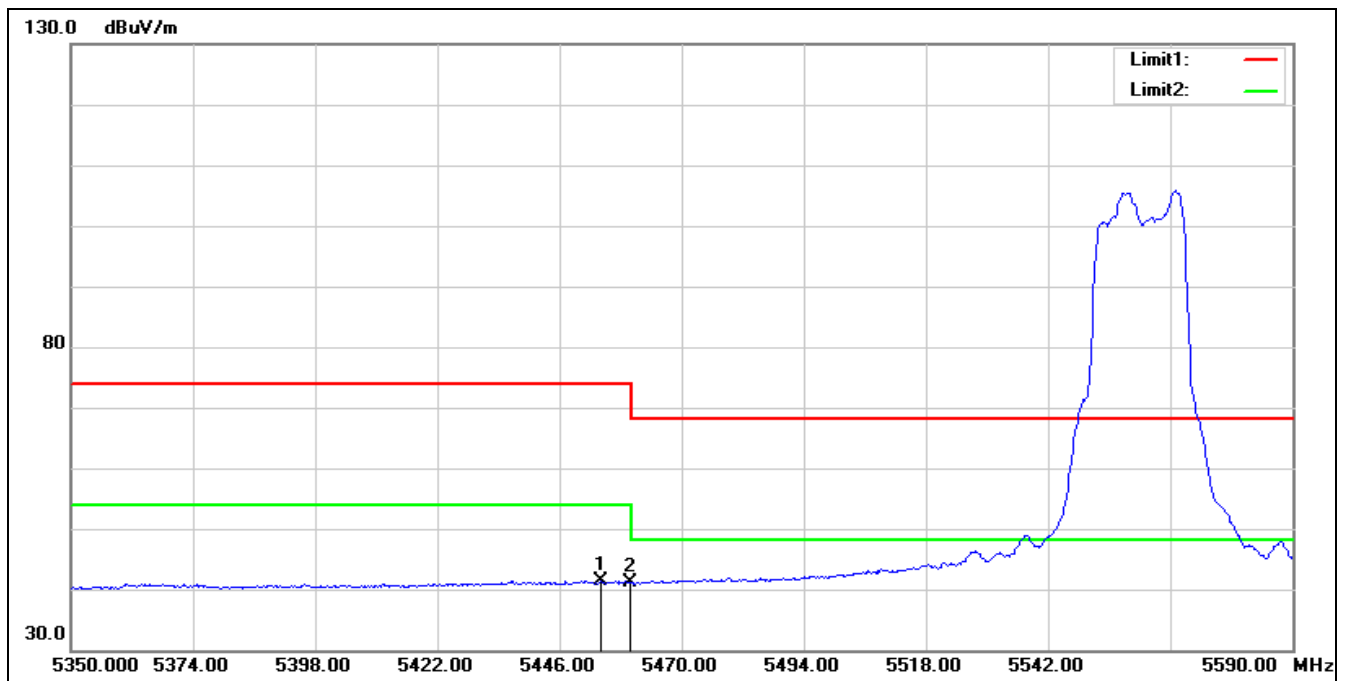


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5454.160	39.66	1.75	41.41	54.00	-12.59	AVG
2	5460.000	39.44	1.75	41.19	54.00	-12.81	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11a 5720 MHz		
Remark:			

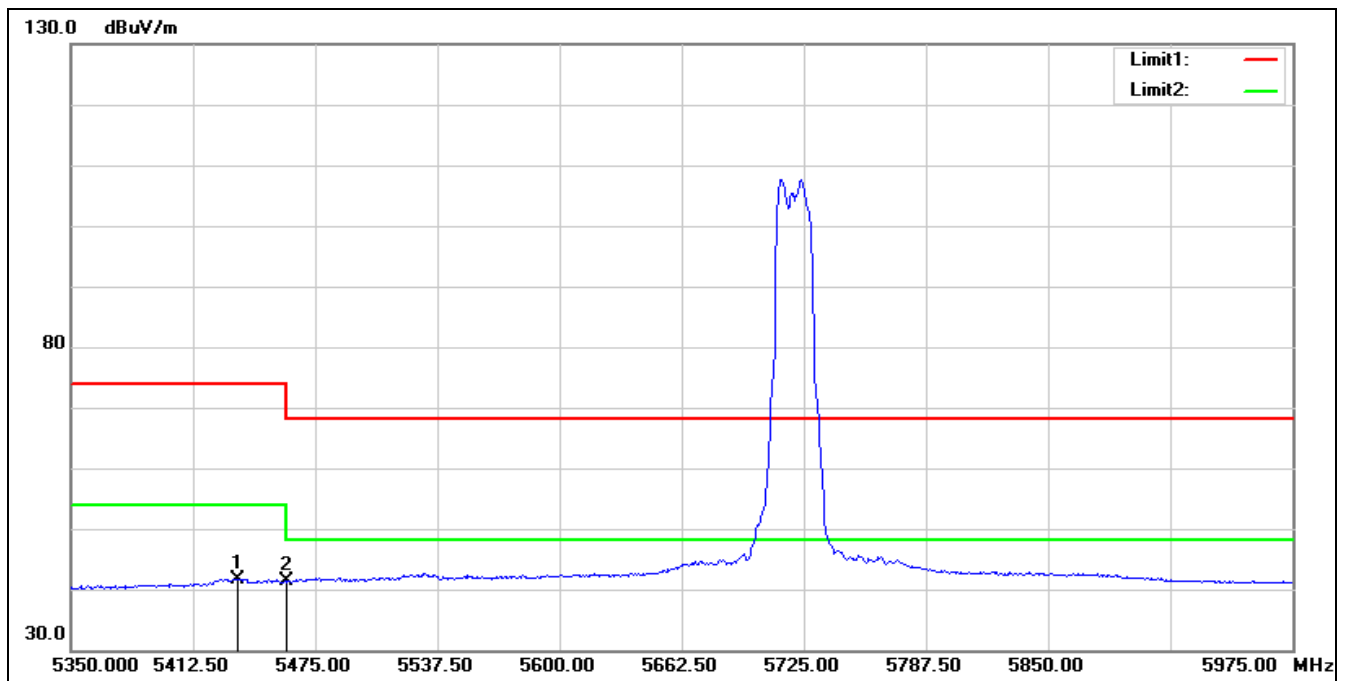

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5435.625	40.10	1.63	41.73	54.00	-12.27	AVG
2	5460.000	39.69	1.75	41.44	54.00	-12.56	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11a 5720 MHz		
Remark:			

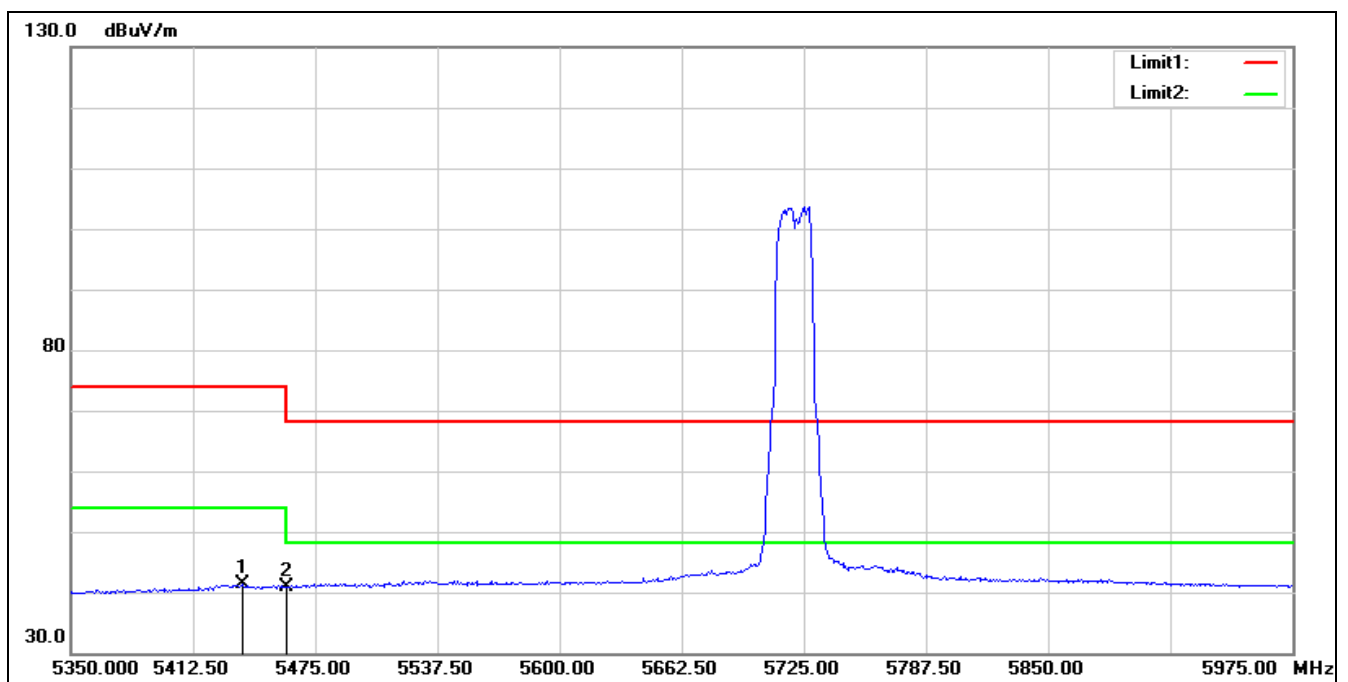


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5438.125	39.62	1.66	41.28	54.00	-12.72	AVG
2	5460.000	39.20	1.75	40.95	54.00	-13.05	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5180 MHz

Remark:

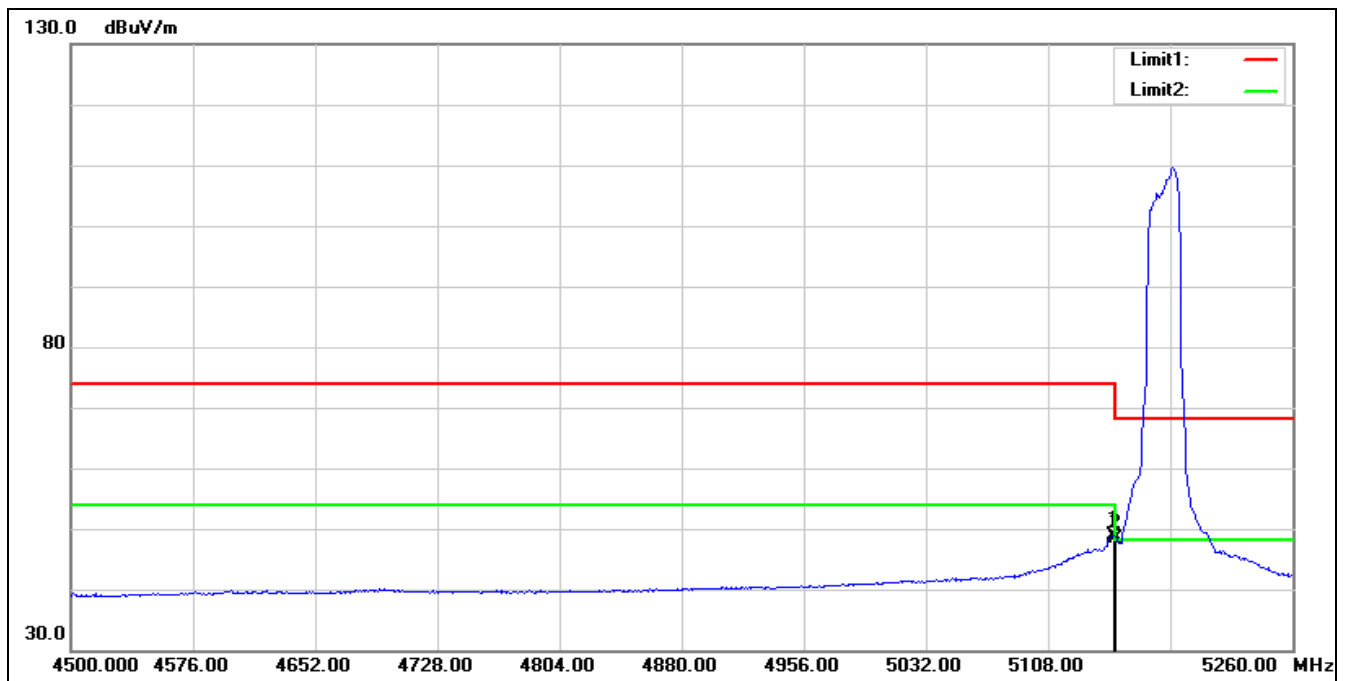


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5149.040	47.58	1.38	48.96	54.00	-5.04	AVG
2	5150.000	47.06	1.38	48.44	54.00	-5.56	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5180 MHz
Remark:

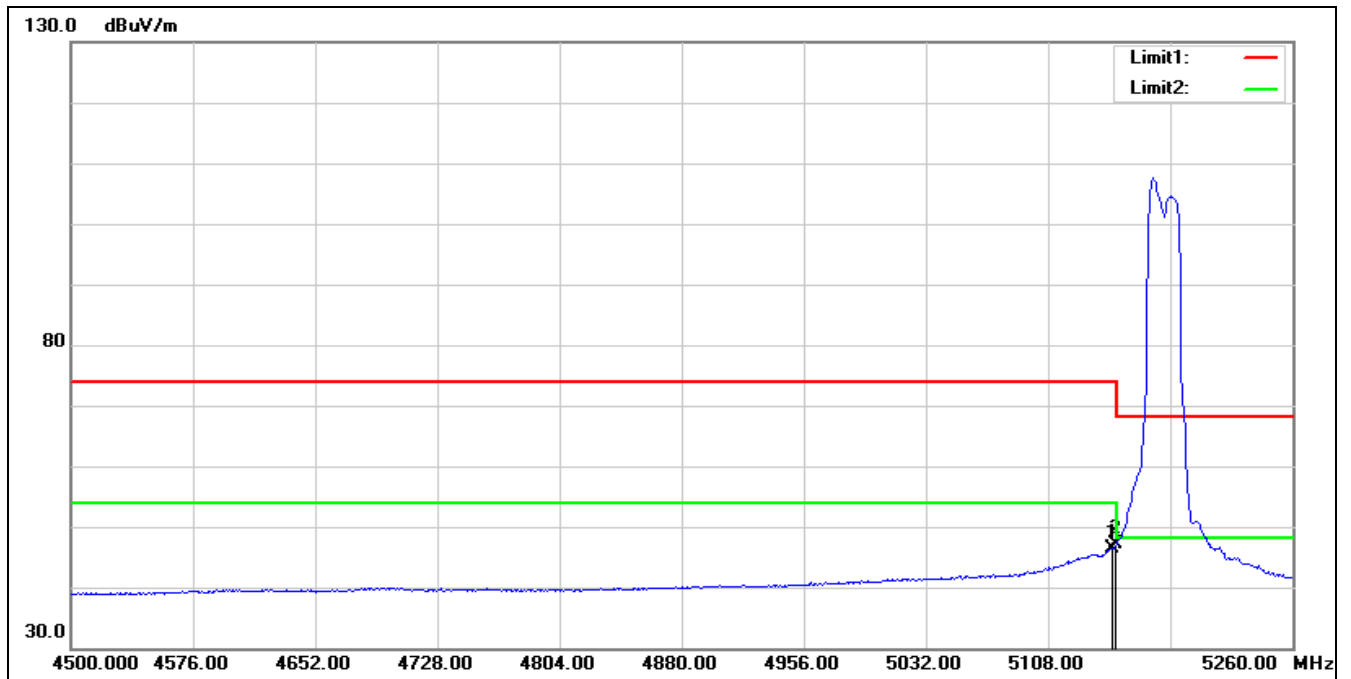

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.520	45.03	1.38	46.41	54.00	-7.59	AVG
2*	5150.000	45.73	1.38	47.11	54.00	-6.89	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

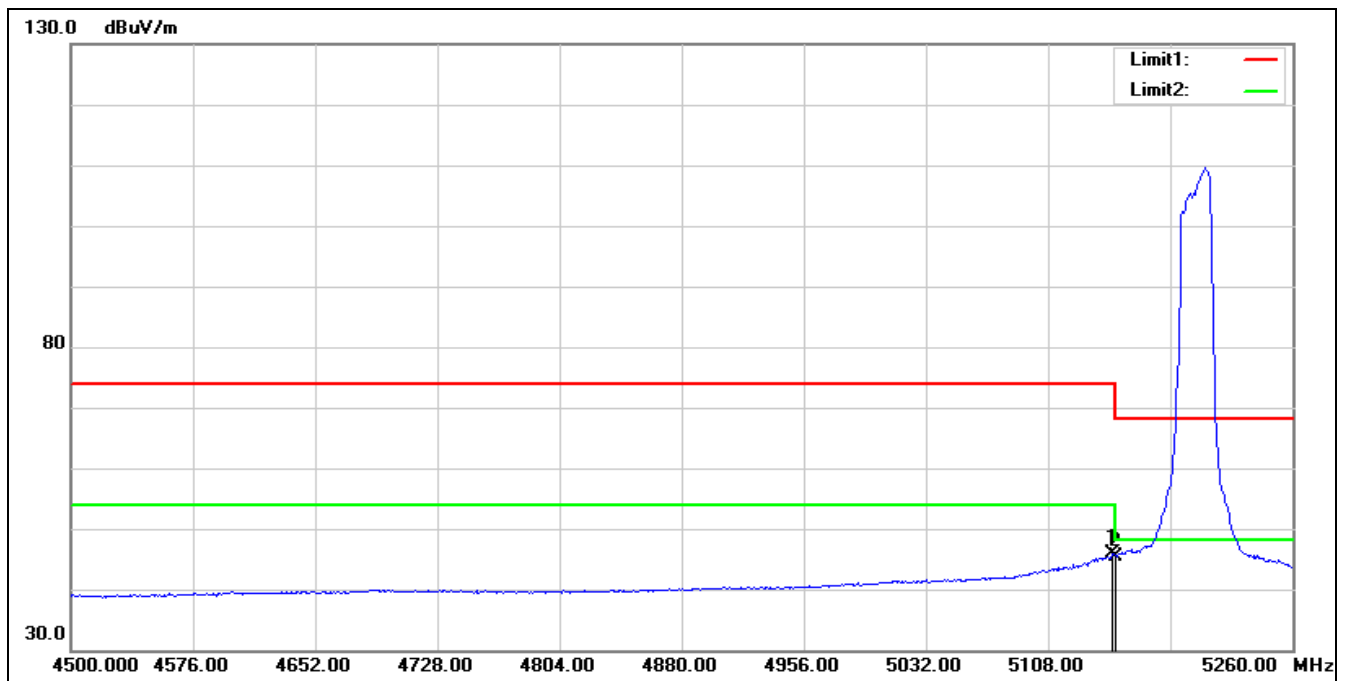


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5147.520	44.44	1.38	45.82	54.00	-8.18	AVG
2	5150.000	44.02	1.38	45.40	54.00	-8.60	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5200 MHz

Remark:

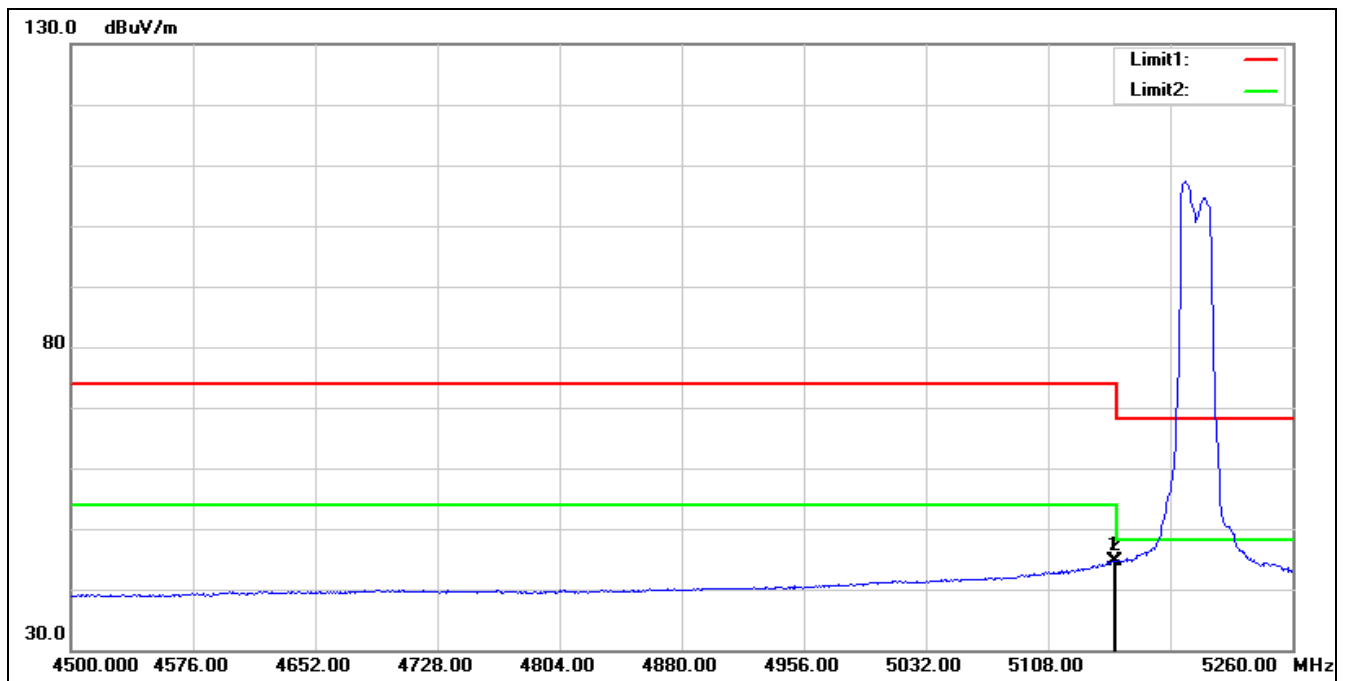


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5149.040	43.34	1.38	44.72	54.00	-9.28	AVG
2	5150.000	43.28	1.38	44.66	54.00	-9.34	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5240 MHz		
Remark:			

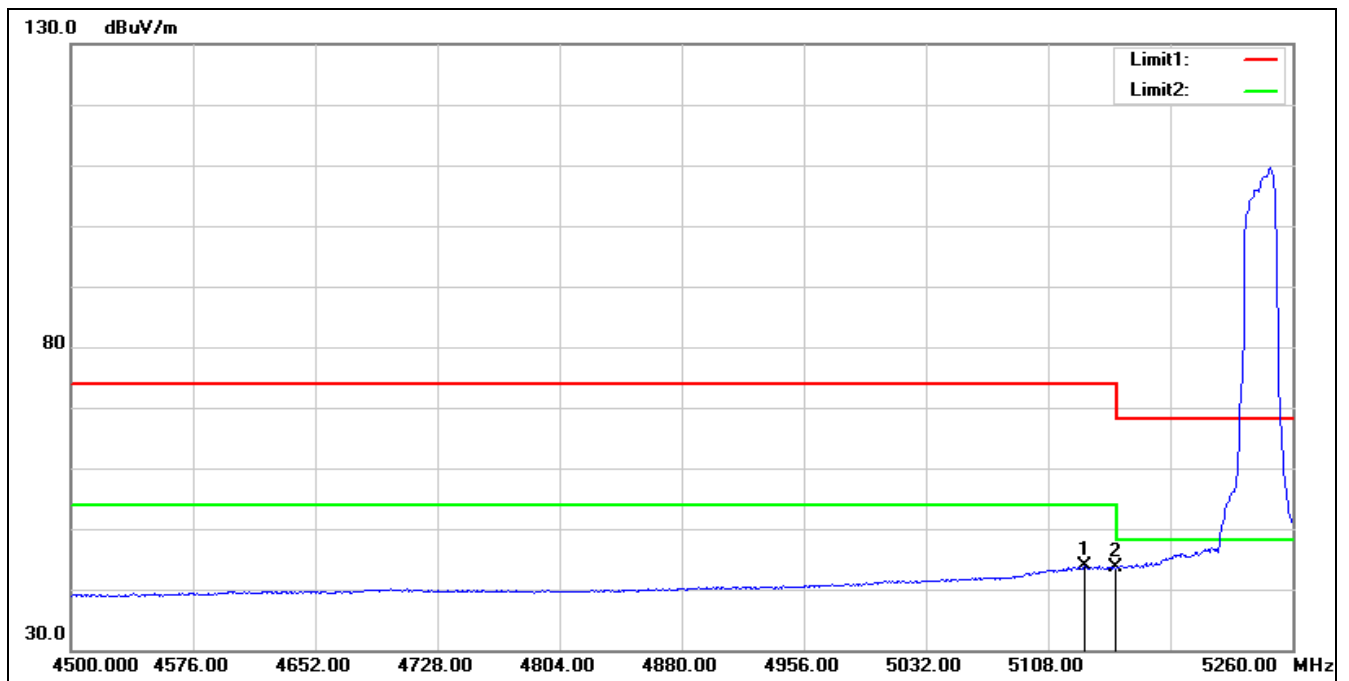


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5130.800	42.50	1.39	43.89	54.00	-10.11	AVG
2	5150.000	42.35	1.38	43.73	54.00	-10.27	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5240 MHz
Remark:

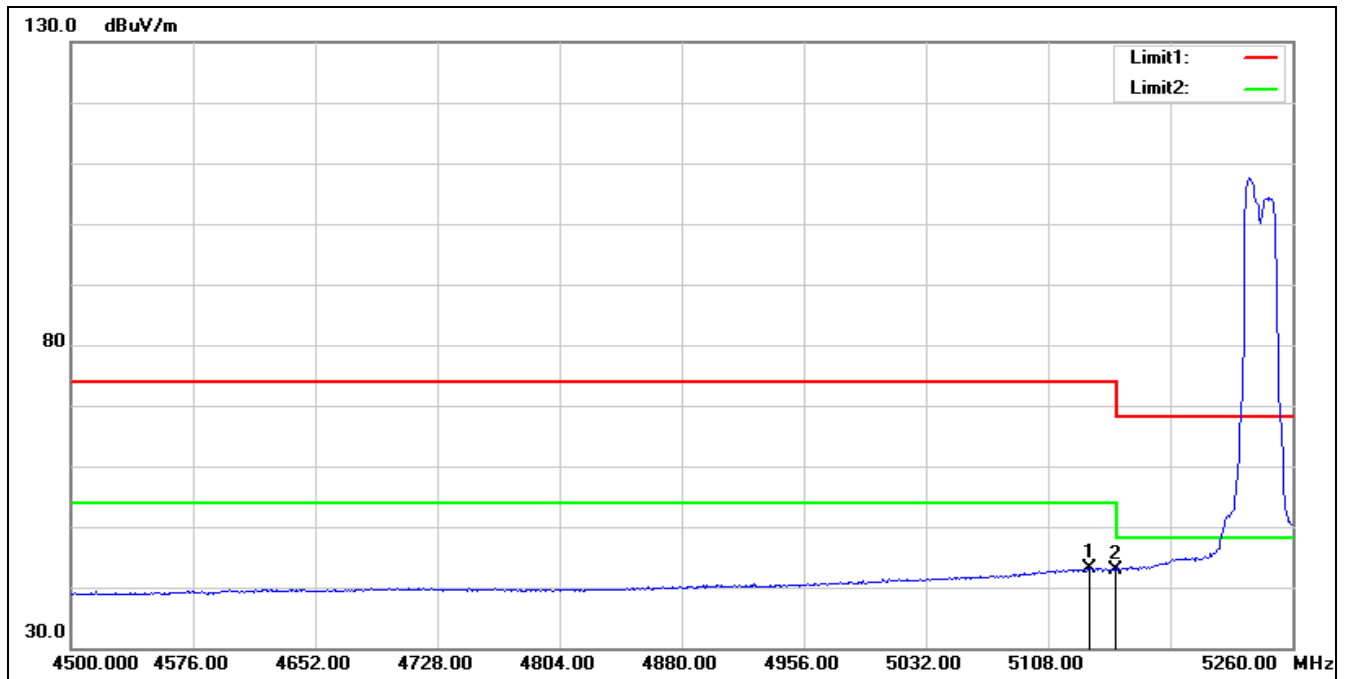


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5133.840	41.79	1.39	43.18	54.00	-10.82	AVG
2	5150.000	41.59	1.38	42.97	54.00	-11.03	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5260 MHz
Remark:

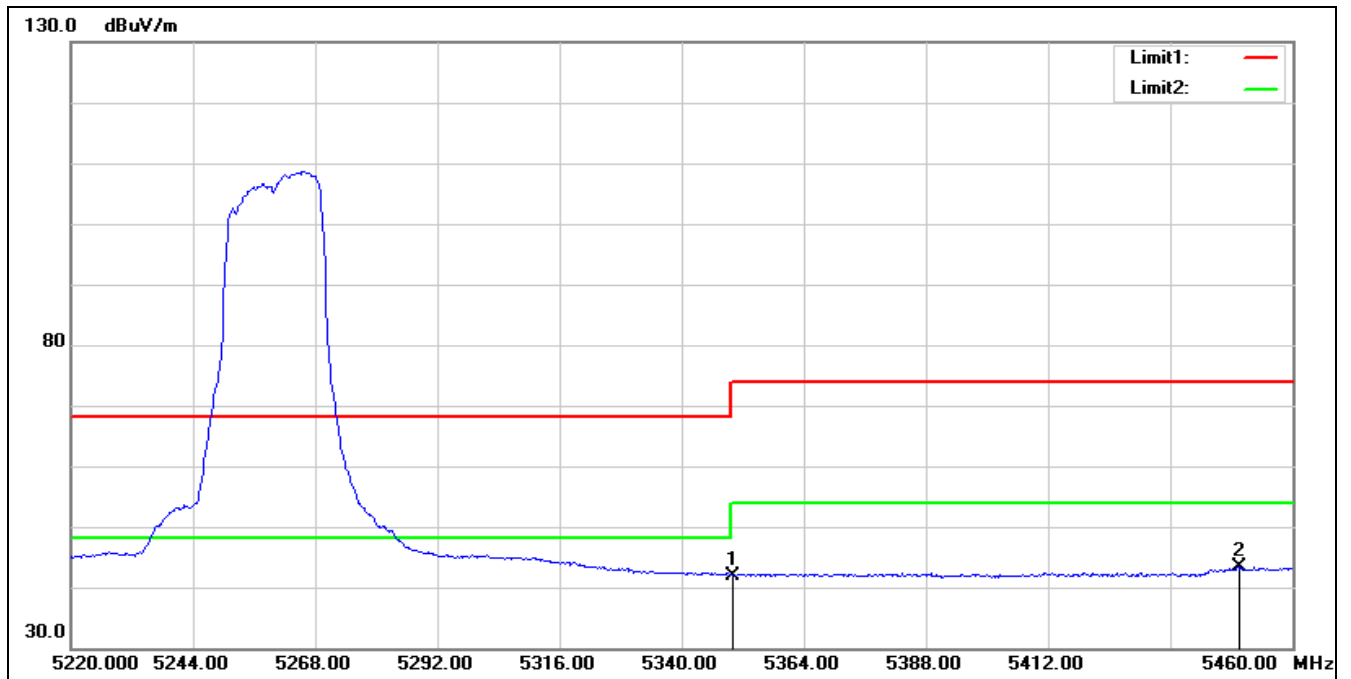


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.97	1.02	41.99	54.00	-12.01	AVG
2*	5449.440	41.64	1.74	43.38	54.00	-10.62	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5260 MHz		
Remark:			

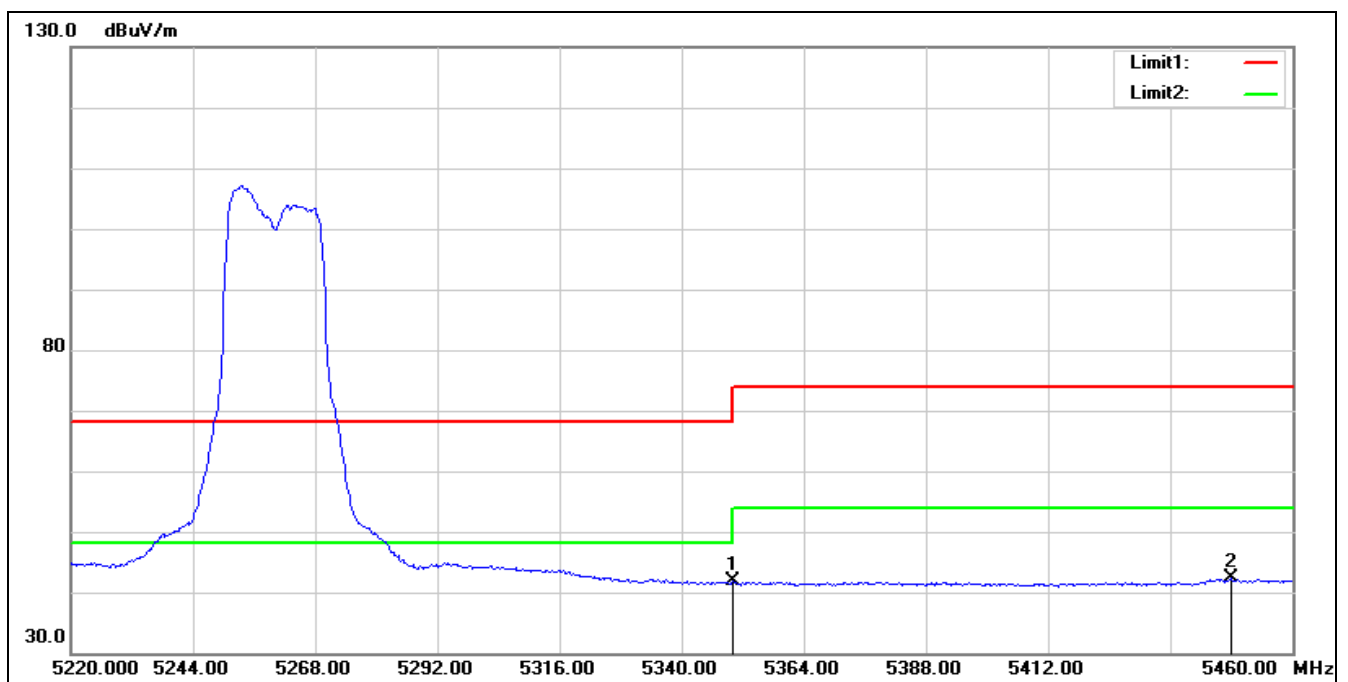


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.86	1.02	41.88	54.00	-12.12	AVG
2*	5448.000	40.55	1.73	42.28	54.00	-11.72	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5280 MHz
Remark:

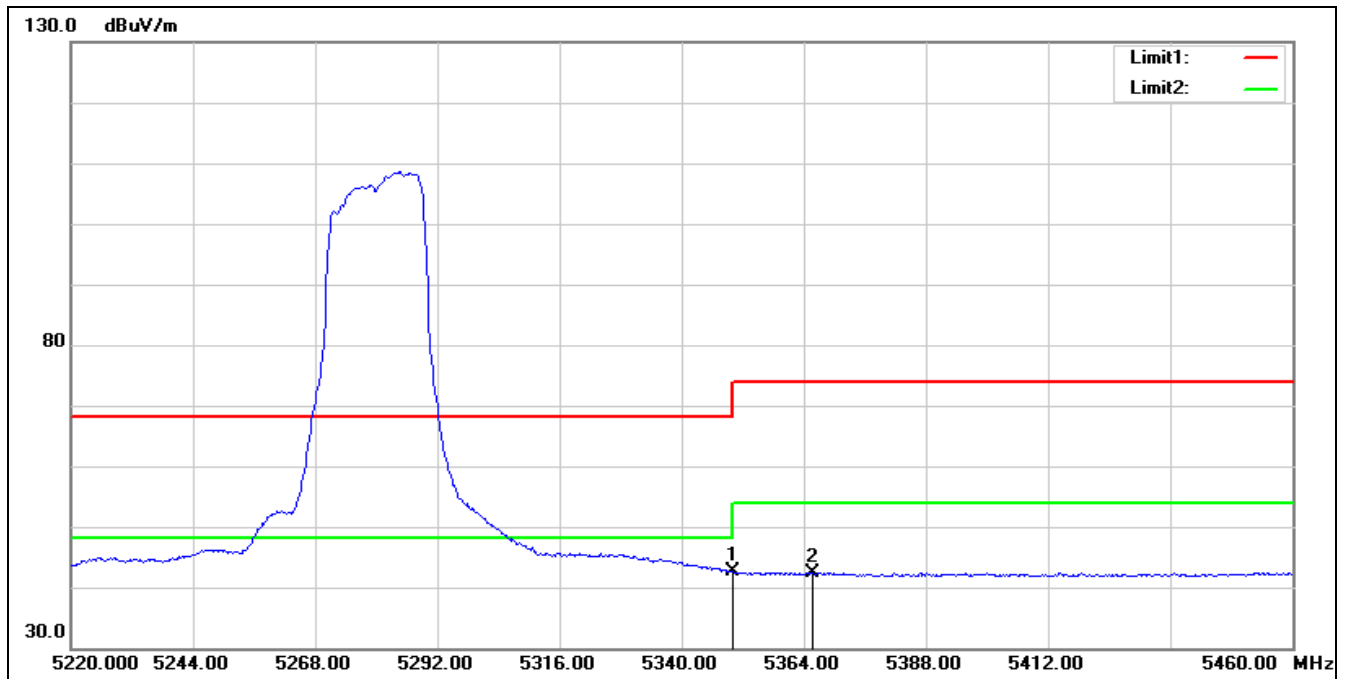


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	41.49	1.02	42.51	54.00	-11.49	AVG
2	5365.680	41.35	1.13	42.48	54.00	-11.52	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5280 MHz
Remark:

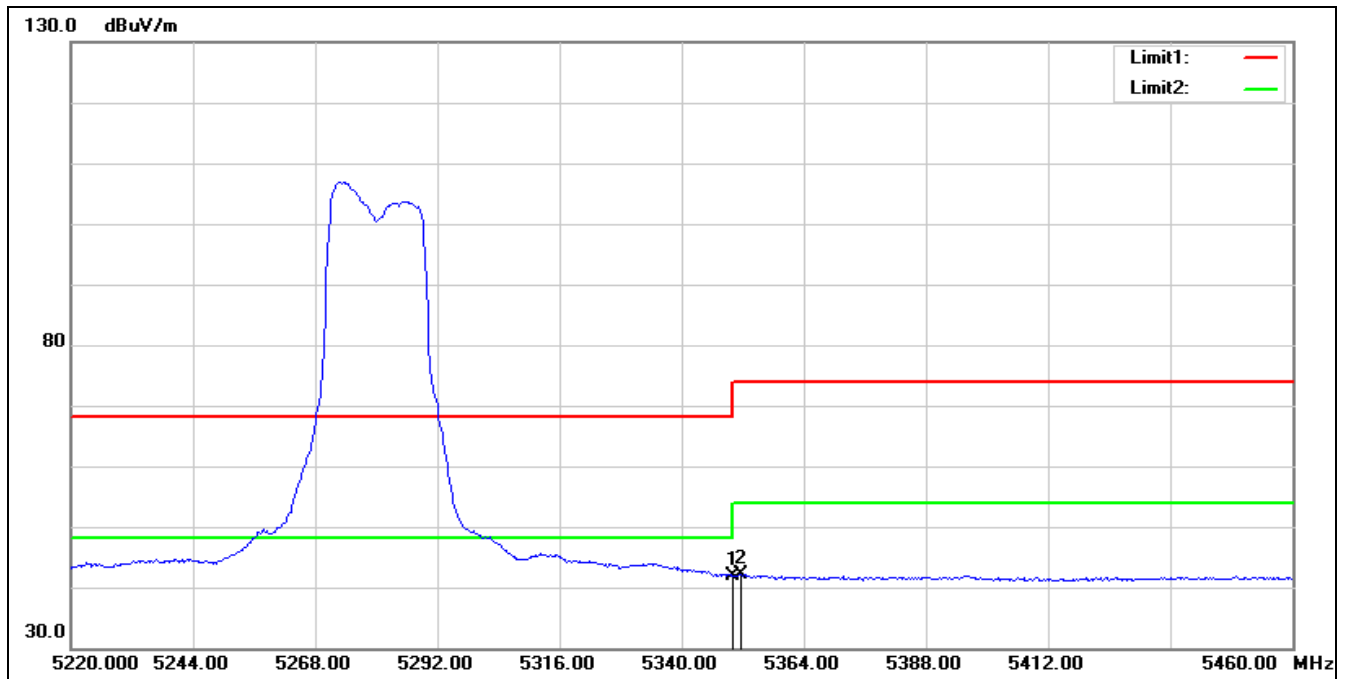


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.93	1.02	41.95	54.00	-12.05	AVG
2*	5351.520	41.15	1.03	42.18	54.00	-11.82	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

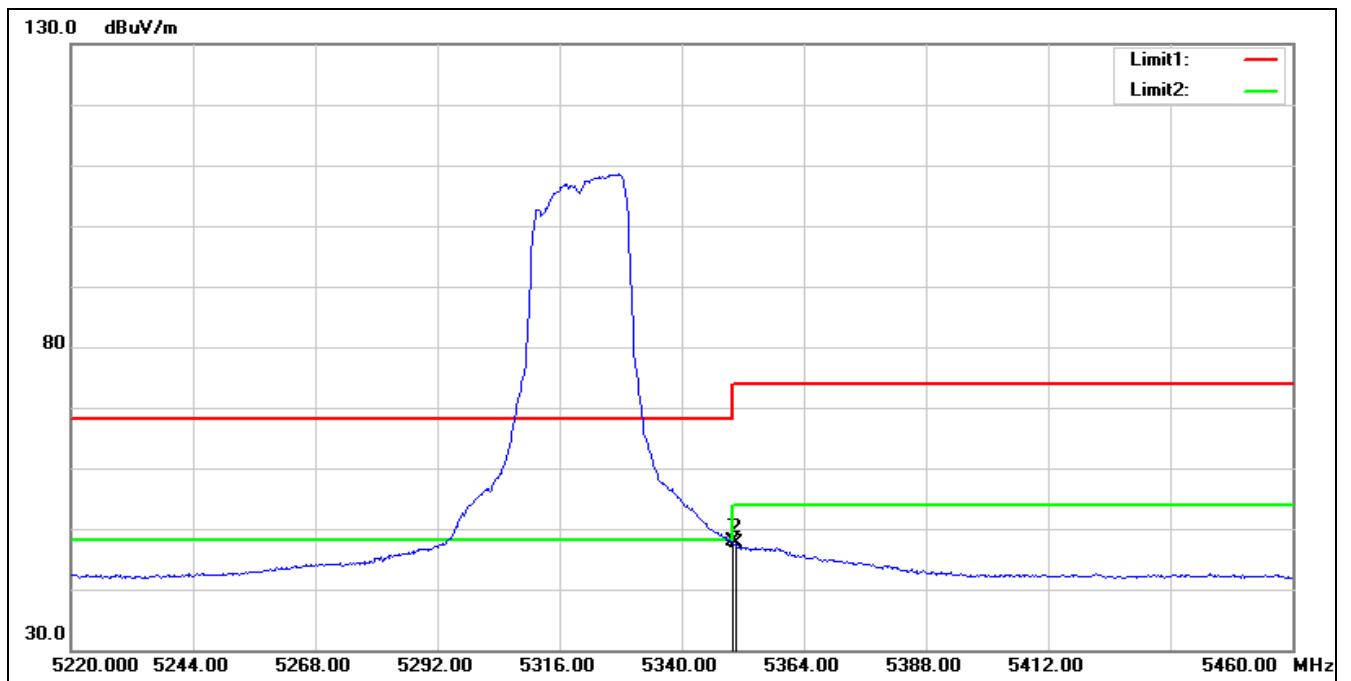


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	46.88	1.02	47.90	54.00	-6.10	AVG
2	5350.560	46.56	1.02	47.58	54.00	-6.42	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

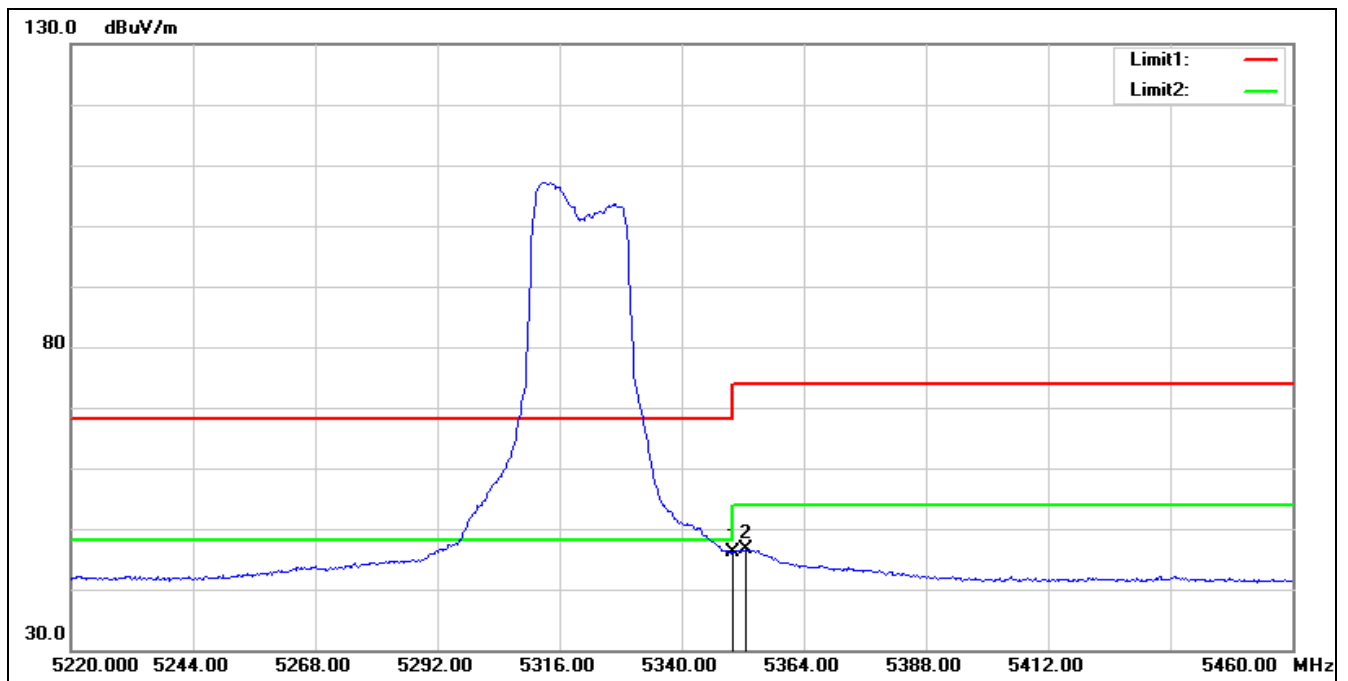


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.04	1.02	46.06	54.00	-7.94	AVG
2*	5352.720	45.56	1.04	46.60	54.00	-7.40	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5500 MHz		
Remark:			

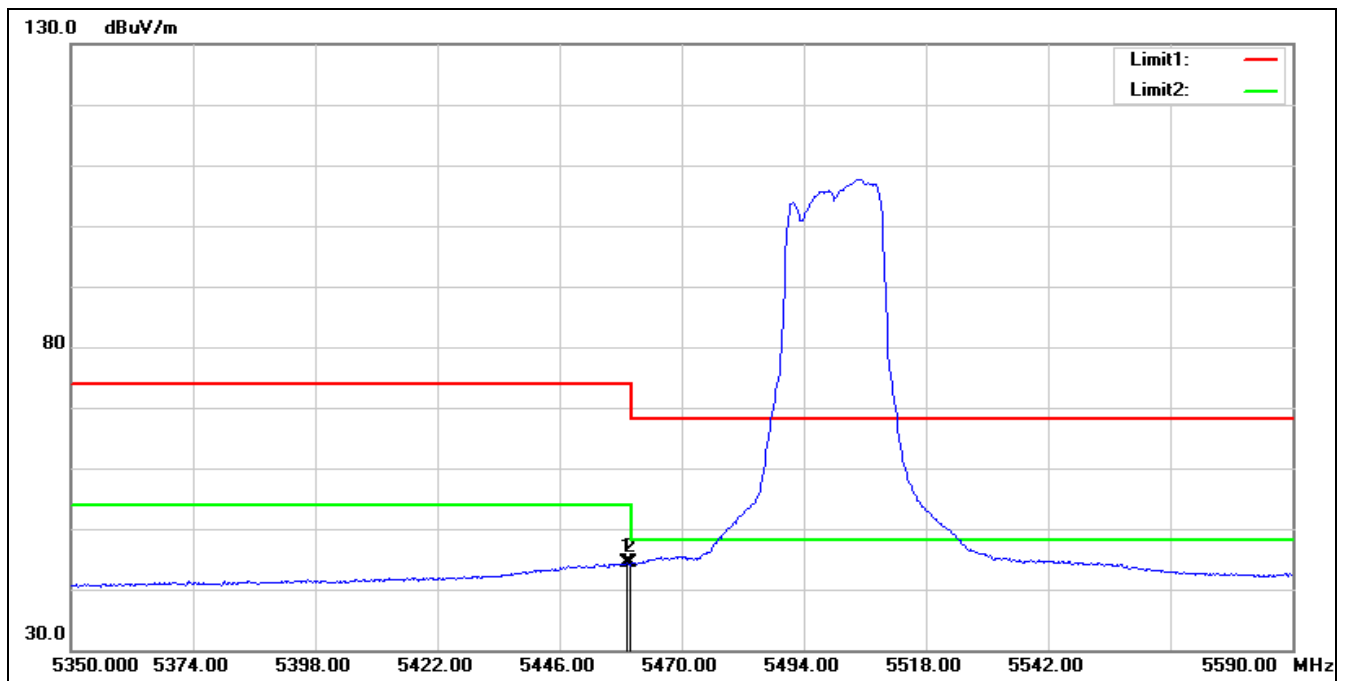


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.200	42.54	1.75	44.29	54.00	-9.71	AVG
2*	5460.000	42.56	1.75	44.31	54.00	-9.69	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5500 MHz		
Remark:			

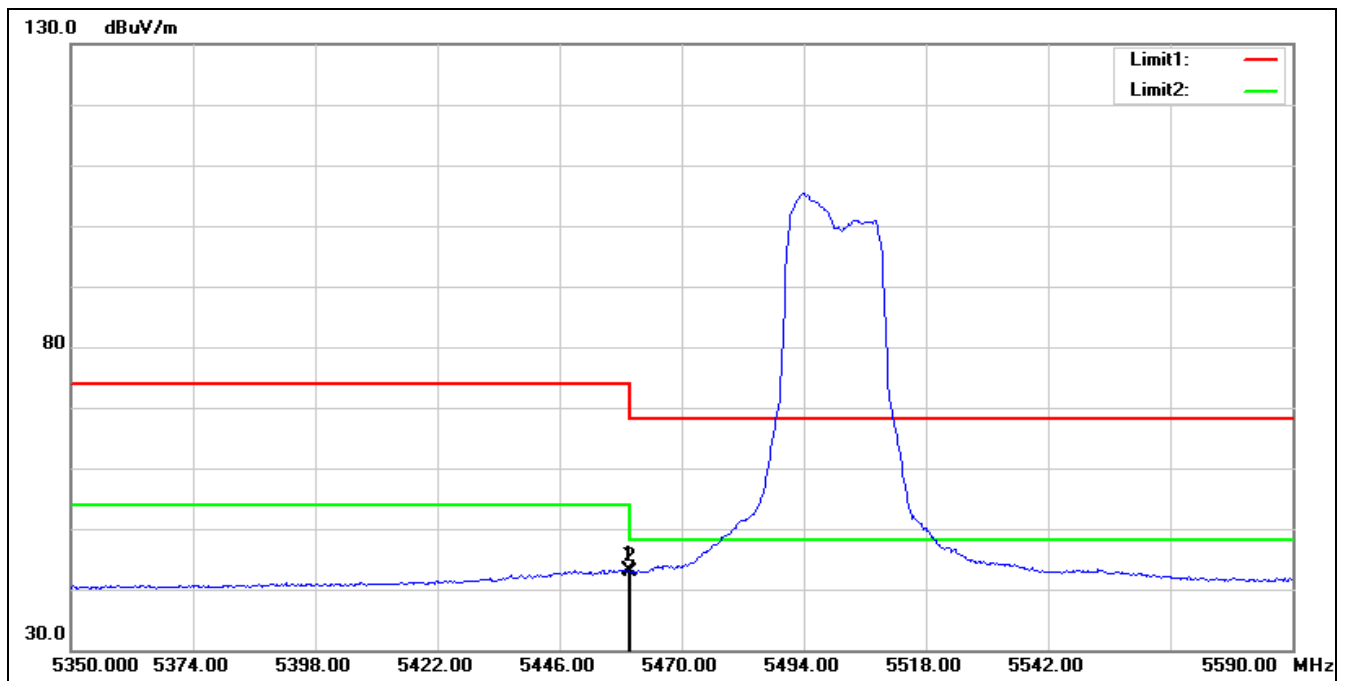


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5459.680	41.45	1.75	43.20	54.00	-10.80	AVG
2	5460.000	41.11	1.75	42.86	54.00	-11.14	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5560 MHz
Remark:

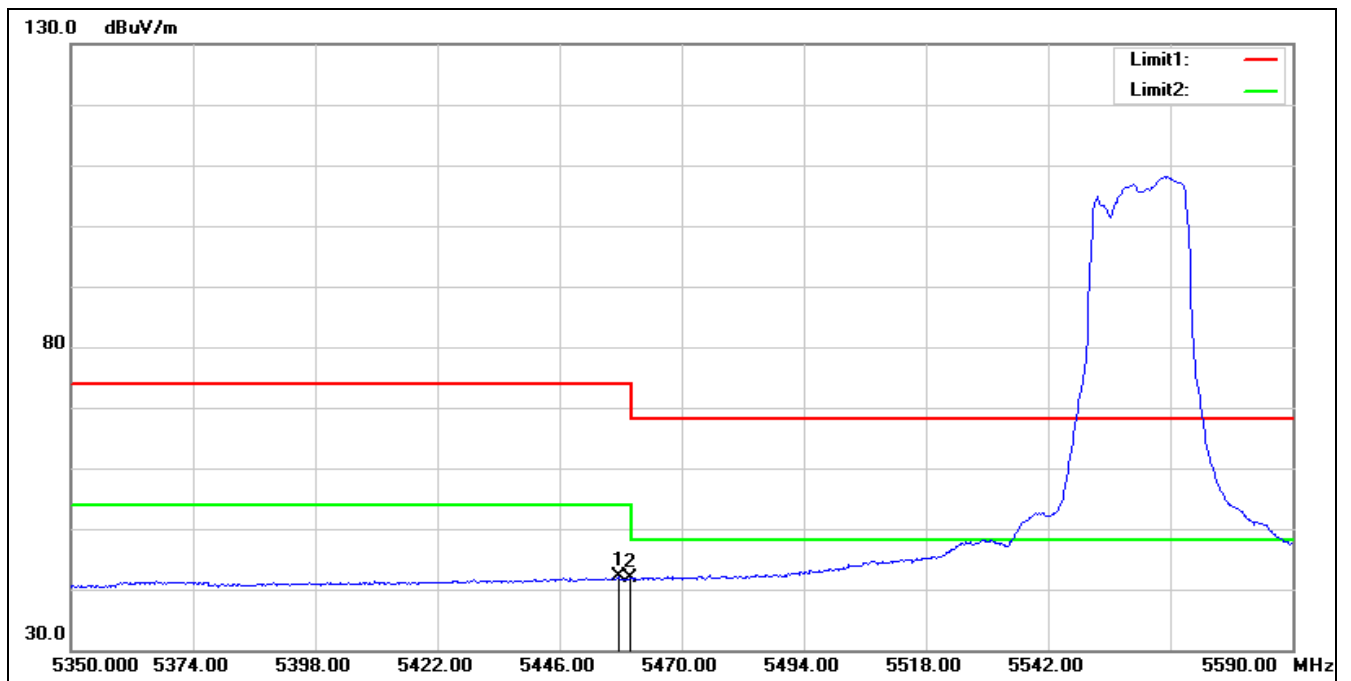


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5457.760	40.27	1.75	42.02	54.00	-11.98	AVG
2	5460.000	40.06	1.75	41.81	54.00	-12.19	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5560 MHz		
Remark:			

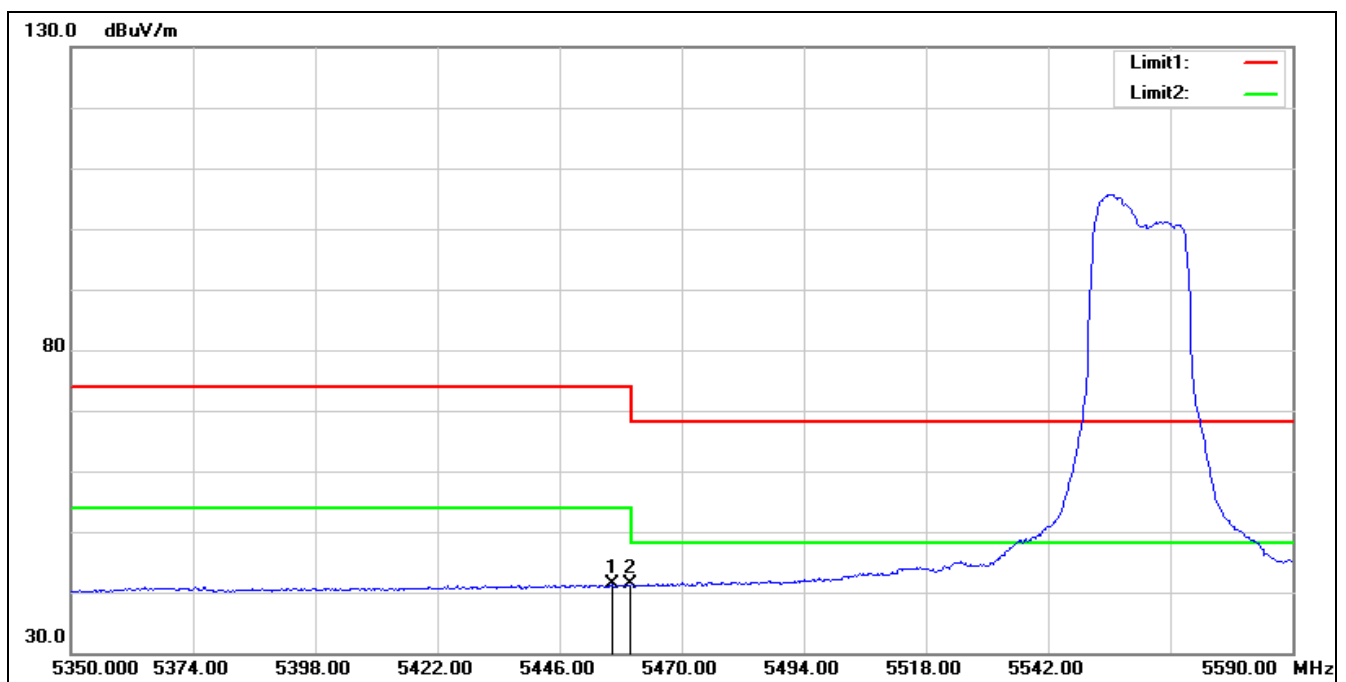

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.320	39.56	1.75	41.31	54.00	-12.69	AVG
2	5460.000	39.56	1.75	41.31	54.00	-12.69	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5720 MHz
Remark:

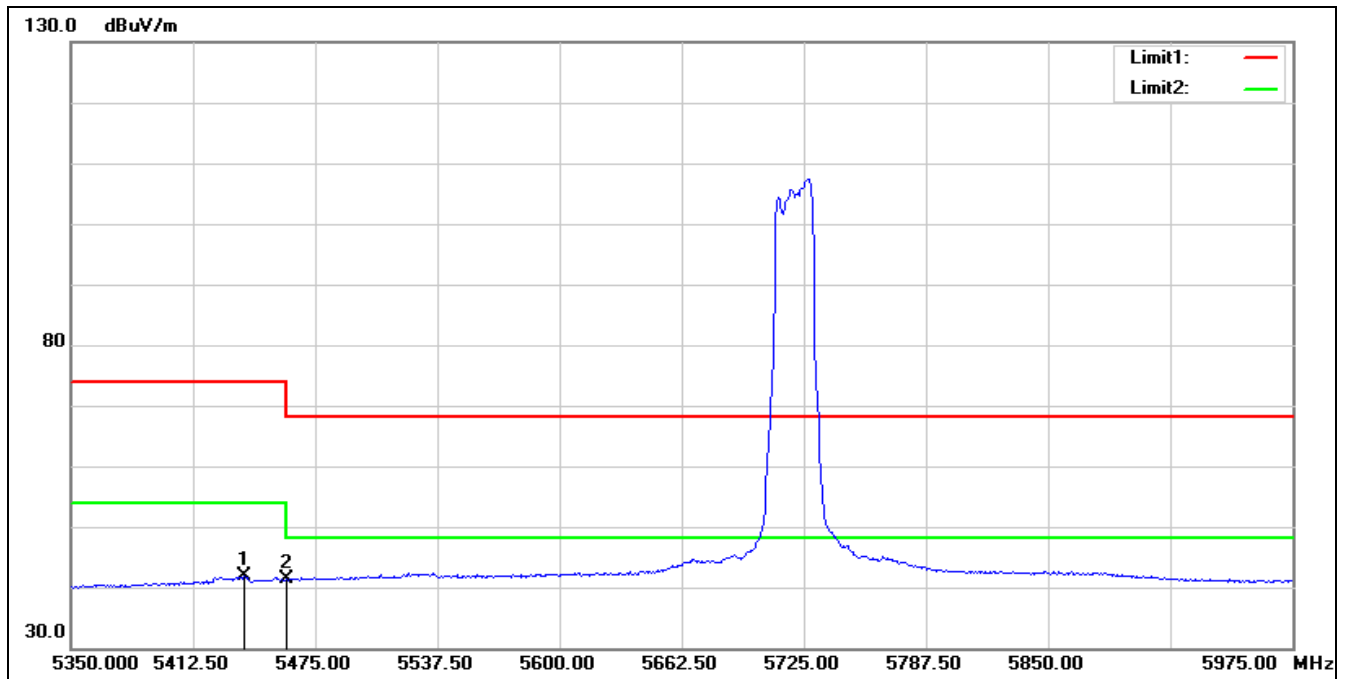


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5438.750	40.22	1.66	41.88	54.00	-12.12	AVG
2	5460.000	39.55	1.75	41.30	54.00	-12.70	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5720 MHz

Remark:

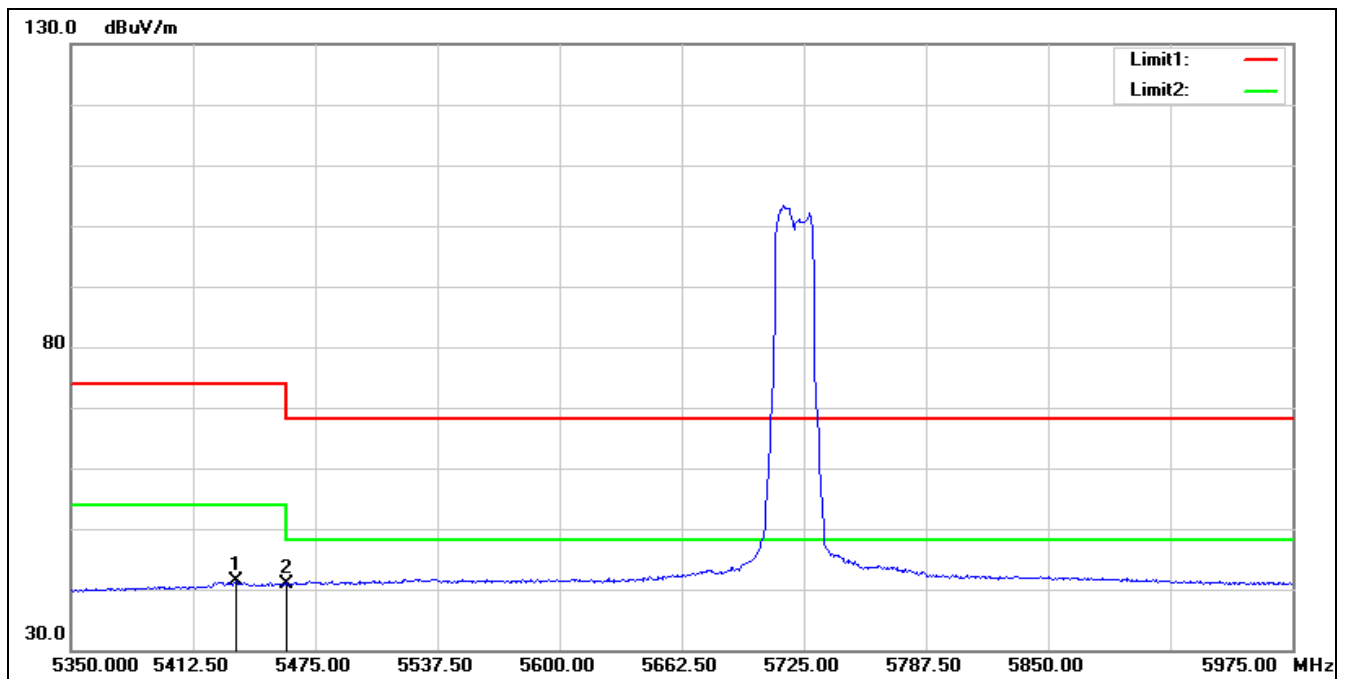


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5434.375	39.63	1.63	41.26	54.00	-12.74	AVG
2	5460.000	39.23	1.75	40.98	54.00	-13.02	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

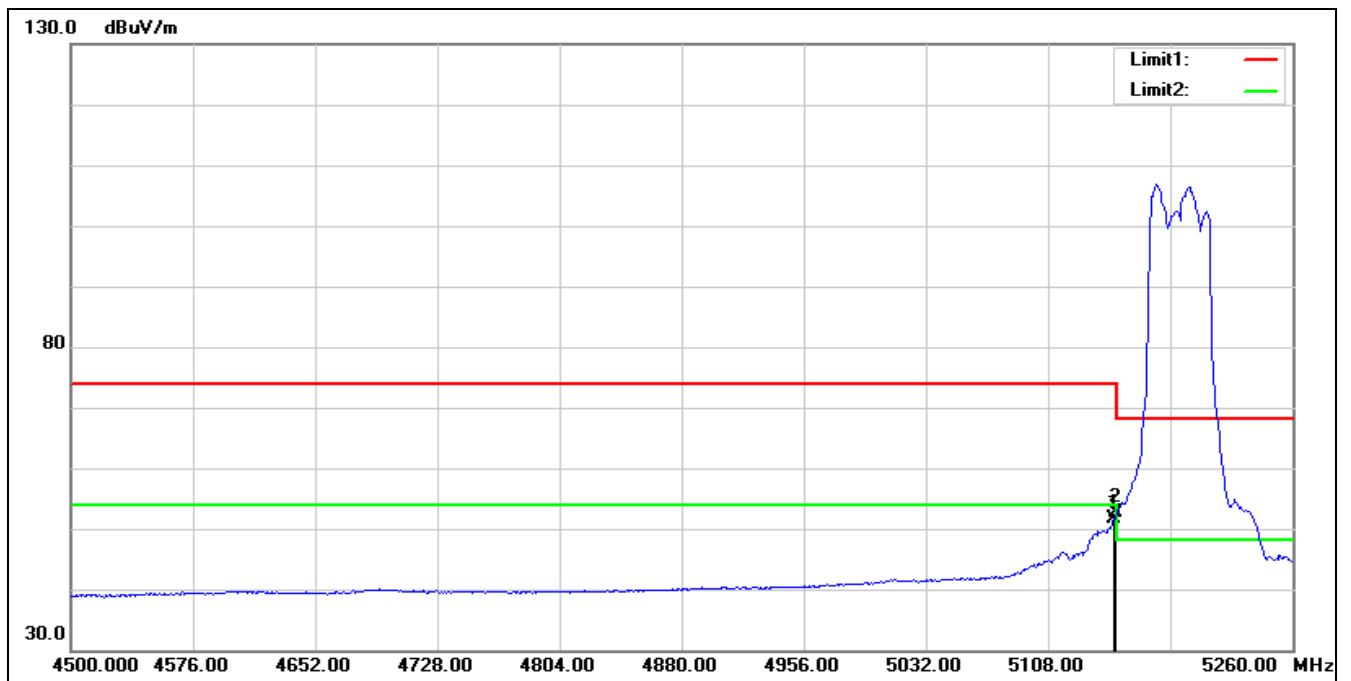


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	50.28	1.38	51.66	54.00	-2.34	AVG
2*	5150.000	51.25	1.38	52.63	54.00	-1.37	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

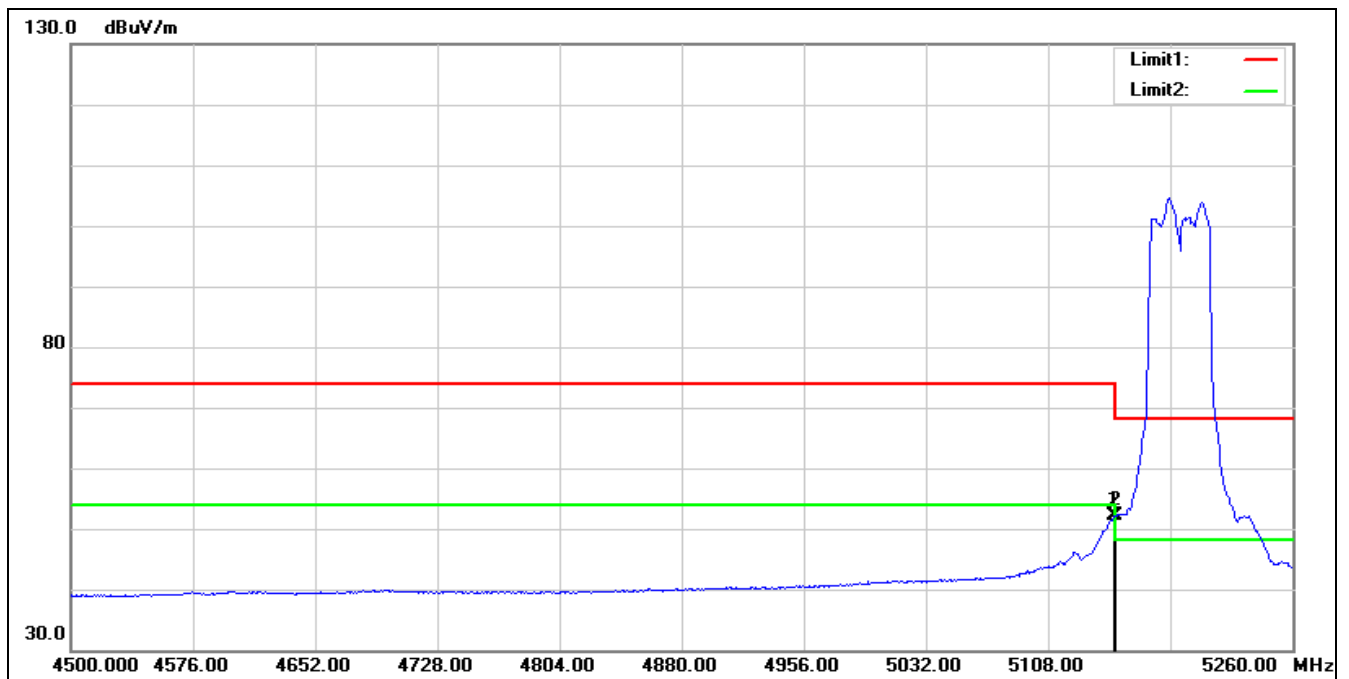


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.040	50.64	1.38	52.02	54.00	-1.98	AVG
2*	5150.000	50.70	1.38	52.08	54.00	-1.92	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5230 MHz		
Remark:			

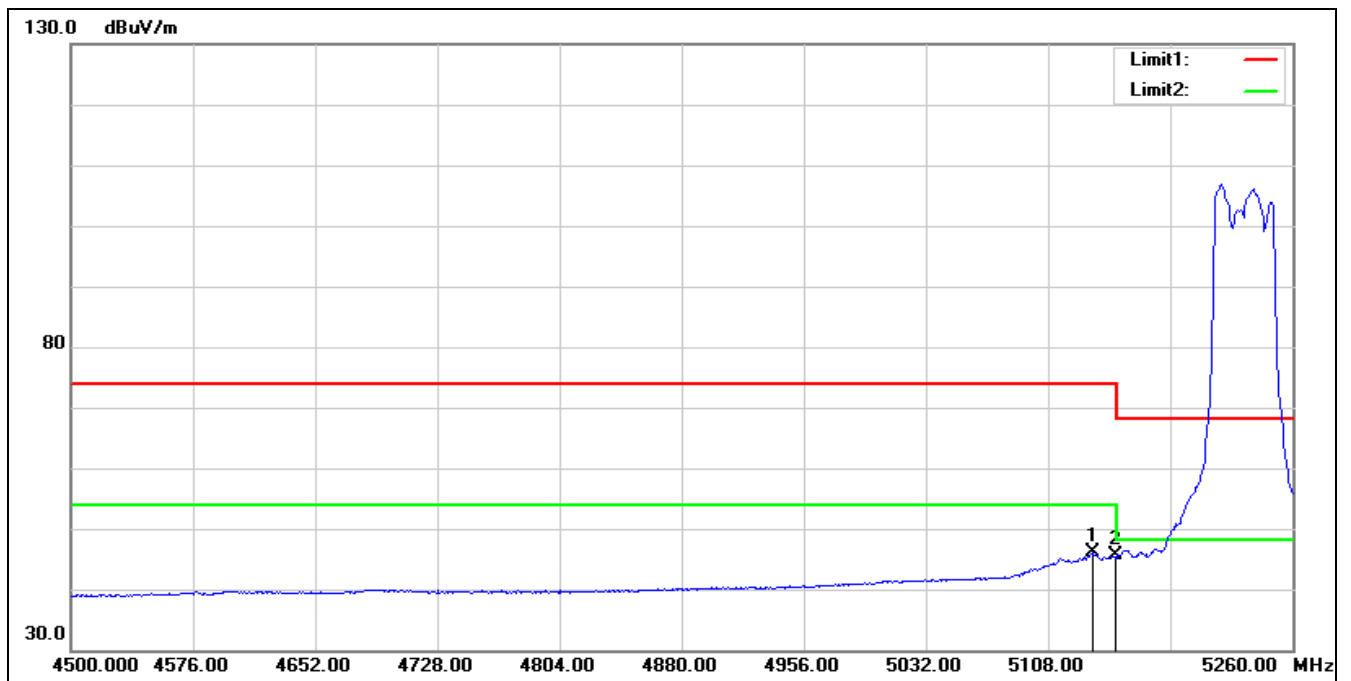


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5136.120	44.83	1.40	46.23	54.00	-7.77	AVG
2	5150.000	44.18	1.38	45.56	54.00	-8.44	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5230 MHz
Remark:

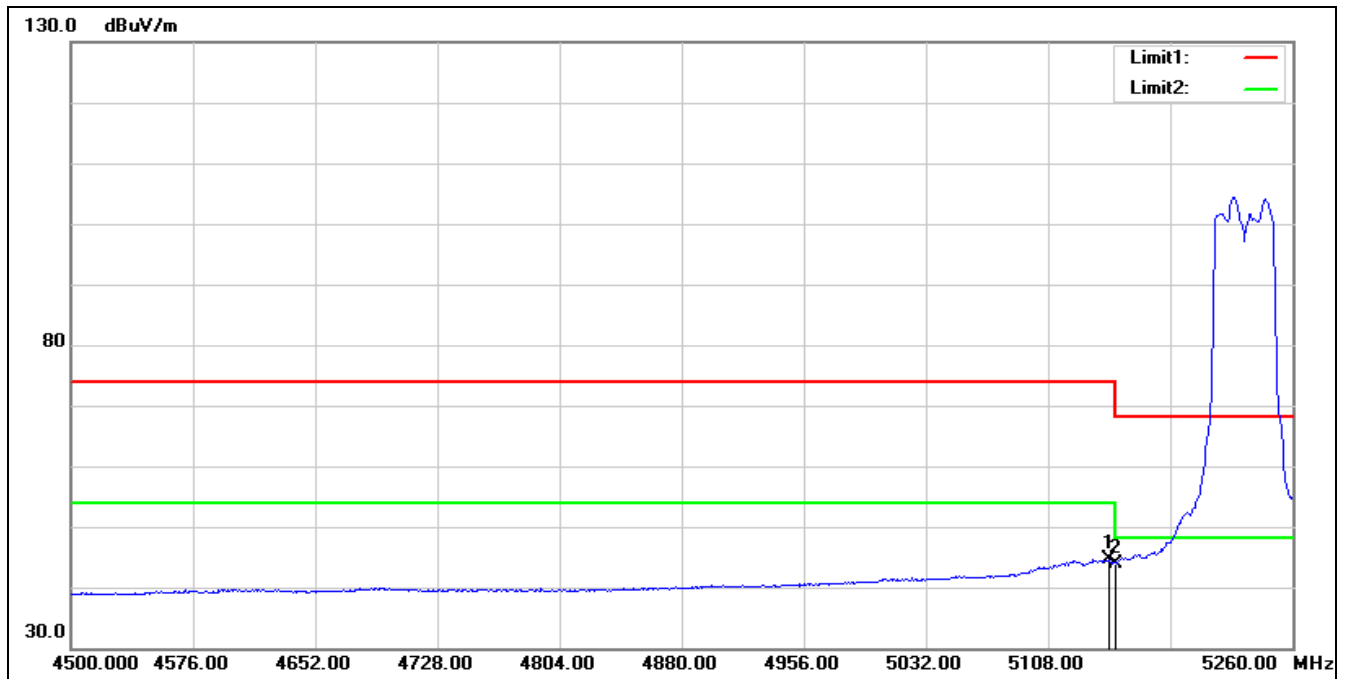

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5146.000	43.15	1.39	44.54	54.00	-9.46	AVG
2	5150.000	42.56	1.38	43.94	54.00	-10.06	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5270 MHz
Remark:

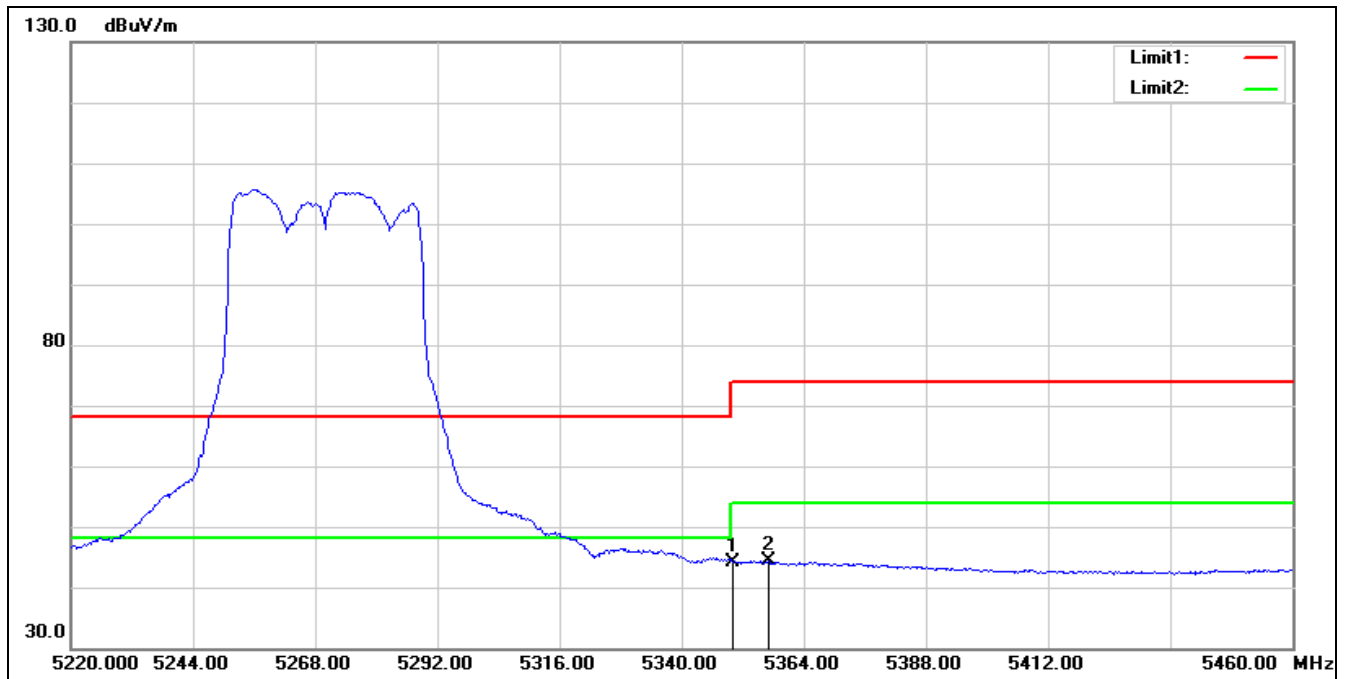


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	43.21	1.02	44.23	54.00	-9.77	AVG
2*	5357.040	43.31	1.07	44.38	54.00	-9.62	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5270 MHz

Remark:

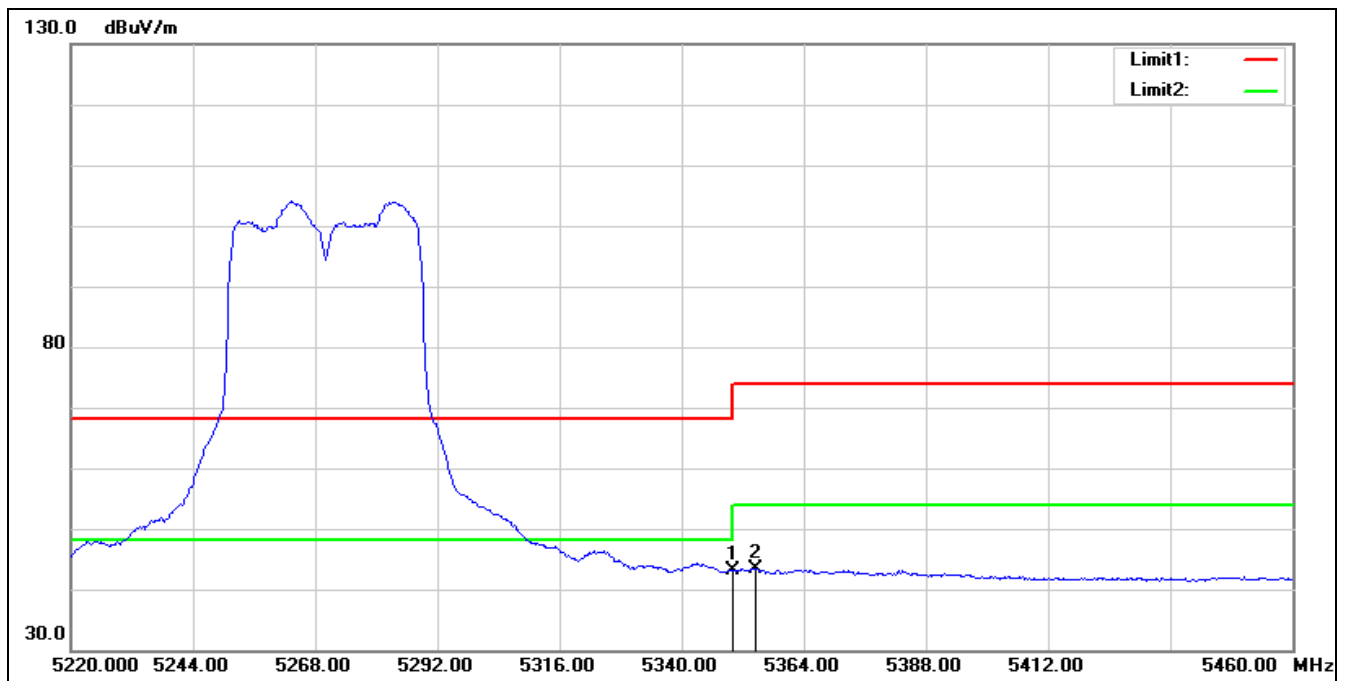


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	42.14	1.02	43.16	54.00	-10.84	AVG
2*	5354.400	42.36	1.06	43.42	54.00	-10.58	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5310 MHz

Remark:

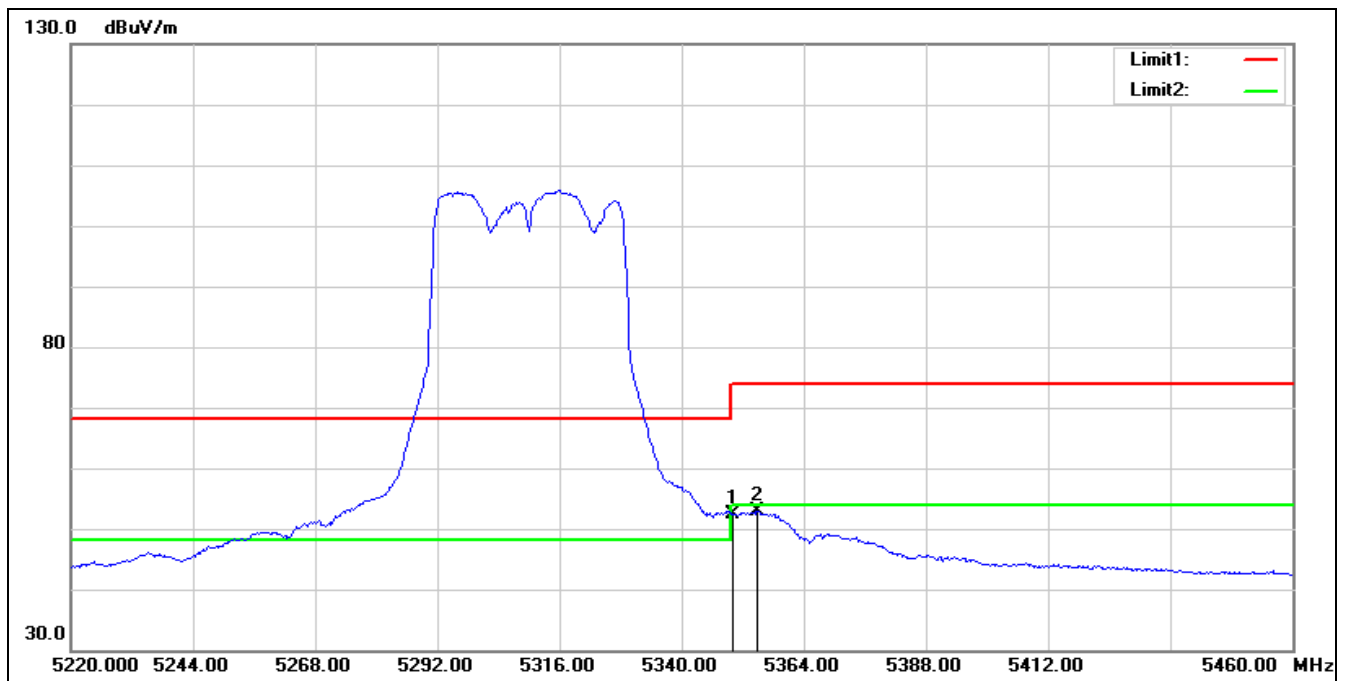


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	51.28	1.02	52.30	54.00	-1.70	AVG
2*	5354.880	51.78	1.06	52.84	54.00	-1.16	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5310 MHz
Remark:

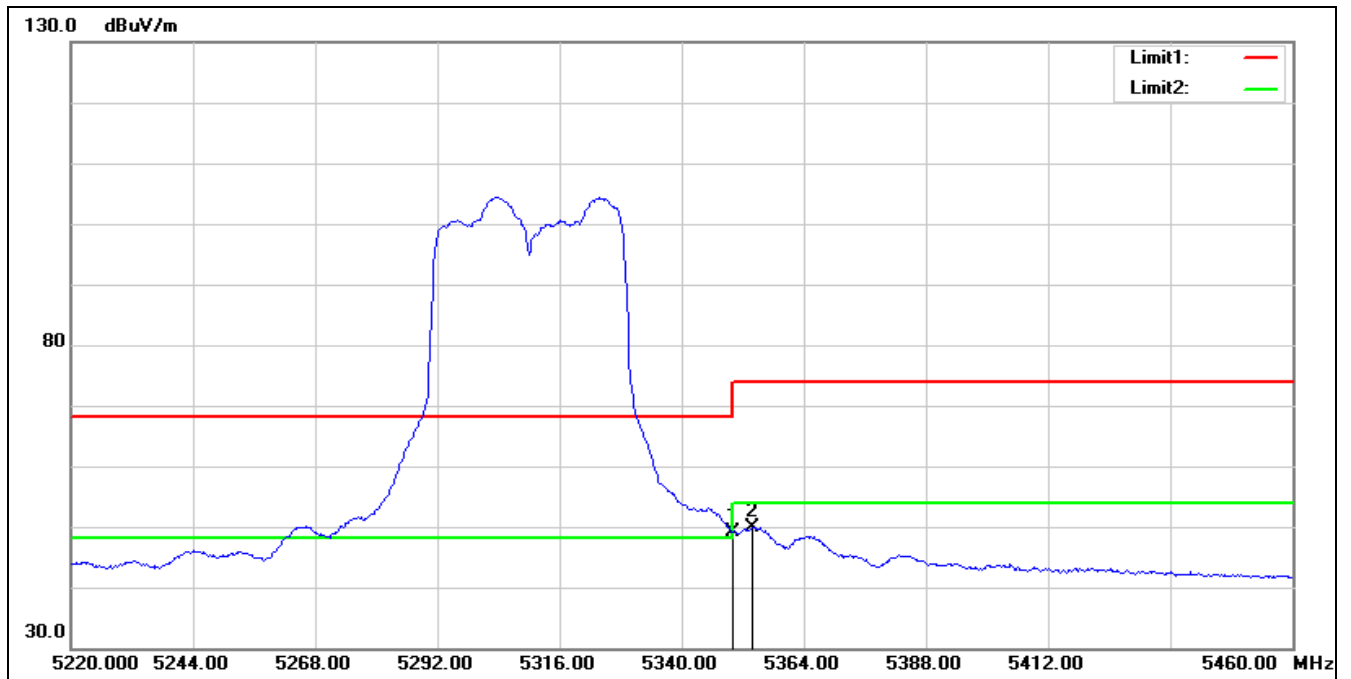

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.18	1.02	49.20	54.00	-4.80	AVG
2*	5353.920	48.85	1.04	49.89	54.00	-4.11	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5510 MHz		
Remark:			

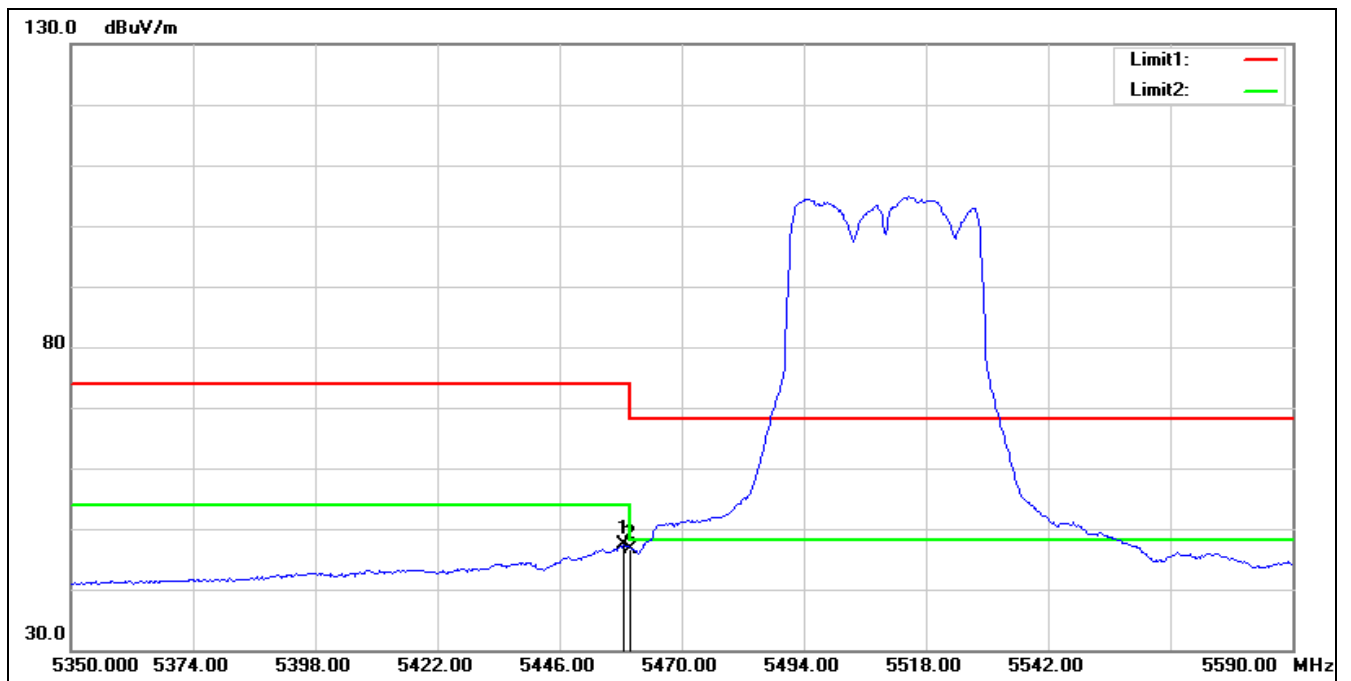


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.720	45.56	1.75	47.31	54.00	-6.69	AVG
2	5460.000	44.95	1.75	46.70	54.00	-7.30	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5510 MHz

Remark:

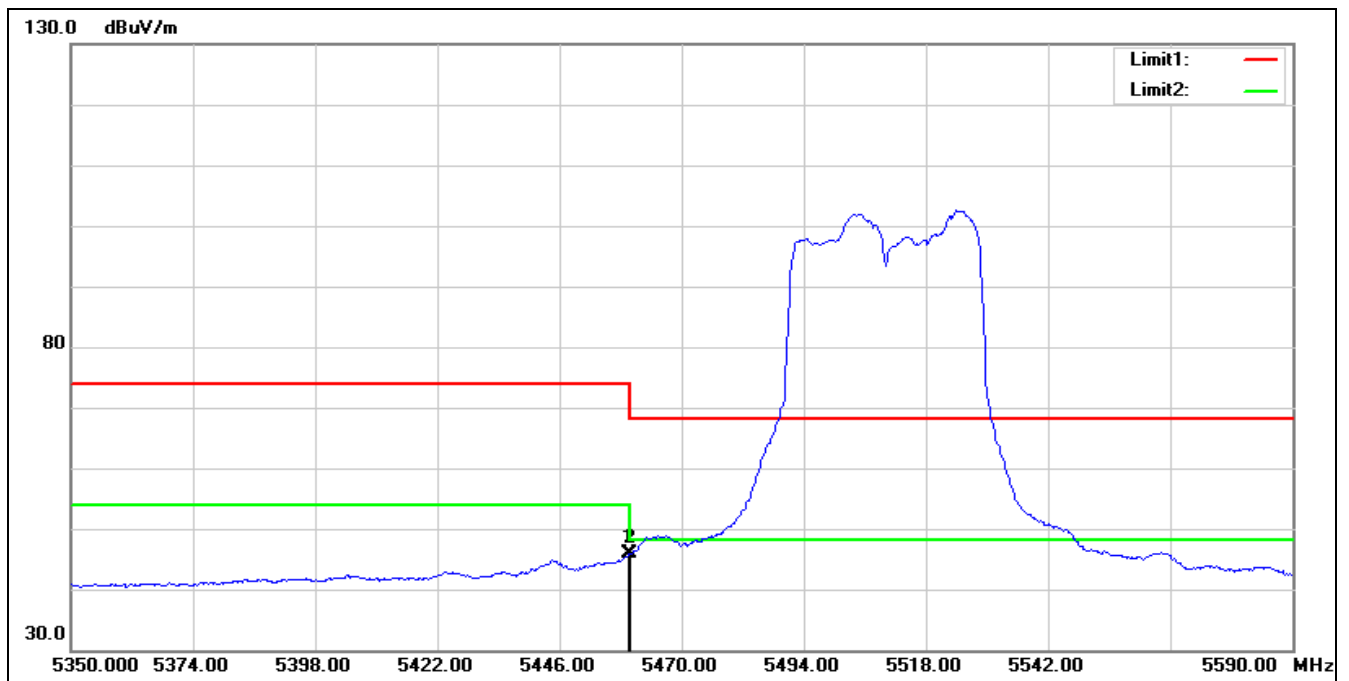


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.680	44.14	1.75	45.89	54.00	-8.11	AVG
2*	5460.000	44.18	1.75	45.93	54.00	-8.07	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

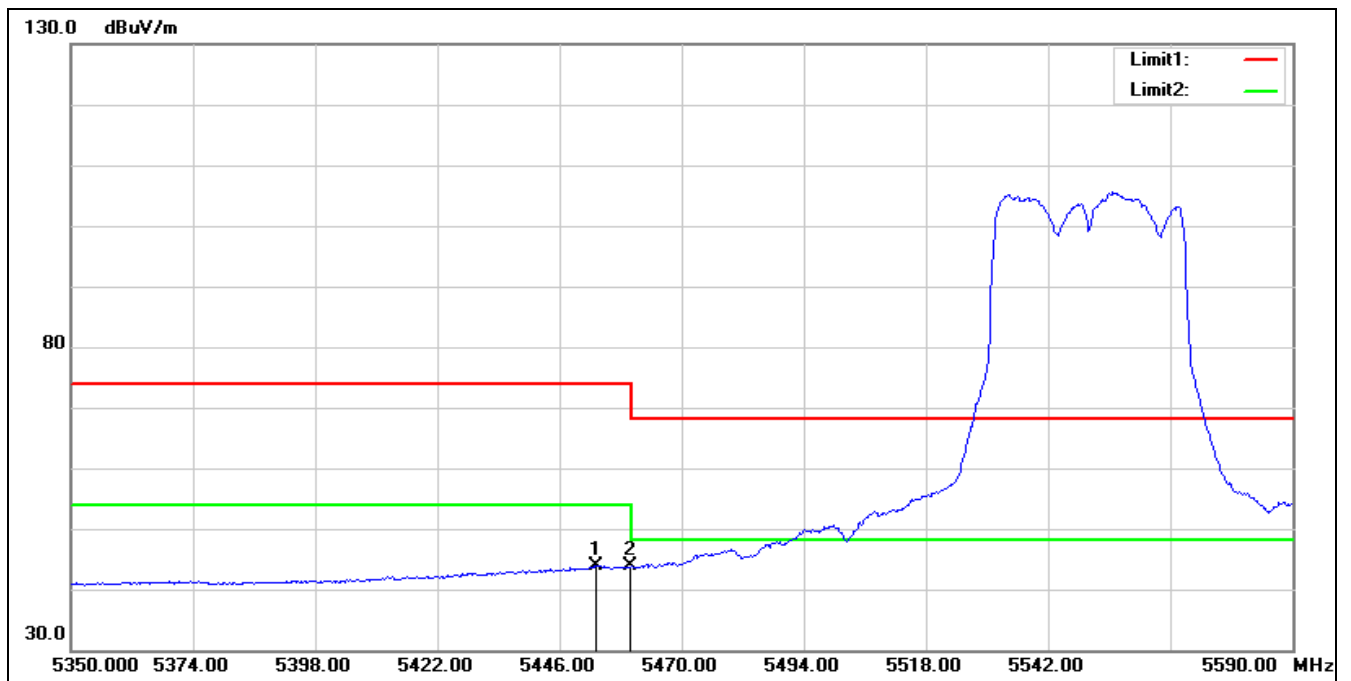


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.200	42.20	1.75	43.95	54.00	-10.05	AVG
2	5460.000	42.01	1.75	43.76	54.00	-10.24	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

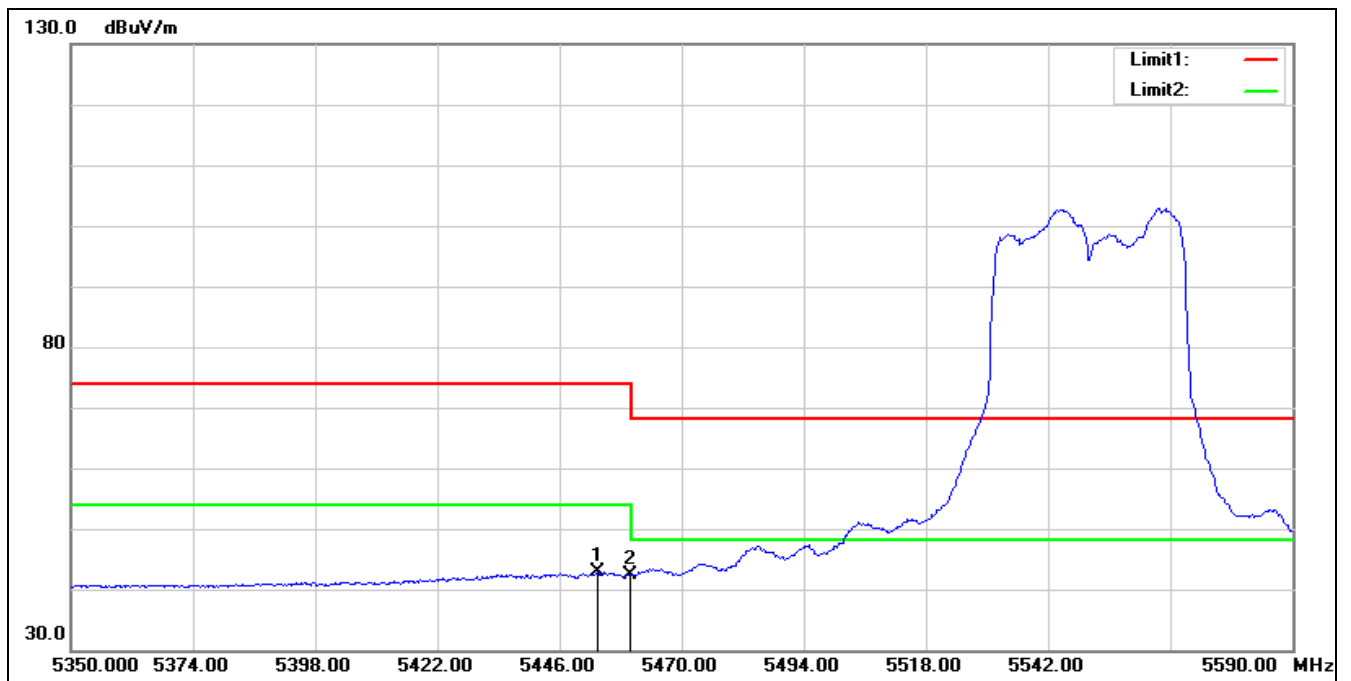

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.440	41.08	1.75	42.83	54.00	-11.17	AVG
2	5460.000	40.64	1.75	42.39	54.00	-11.61	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5710 MHz		
Remark:			

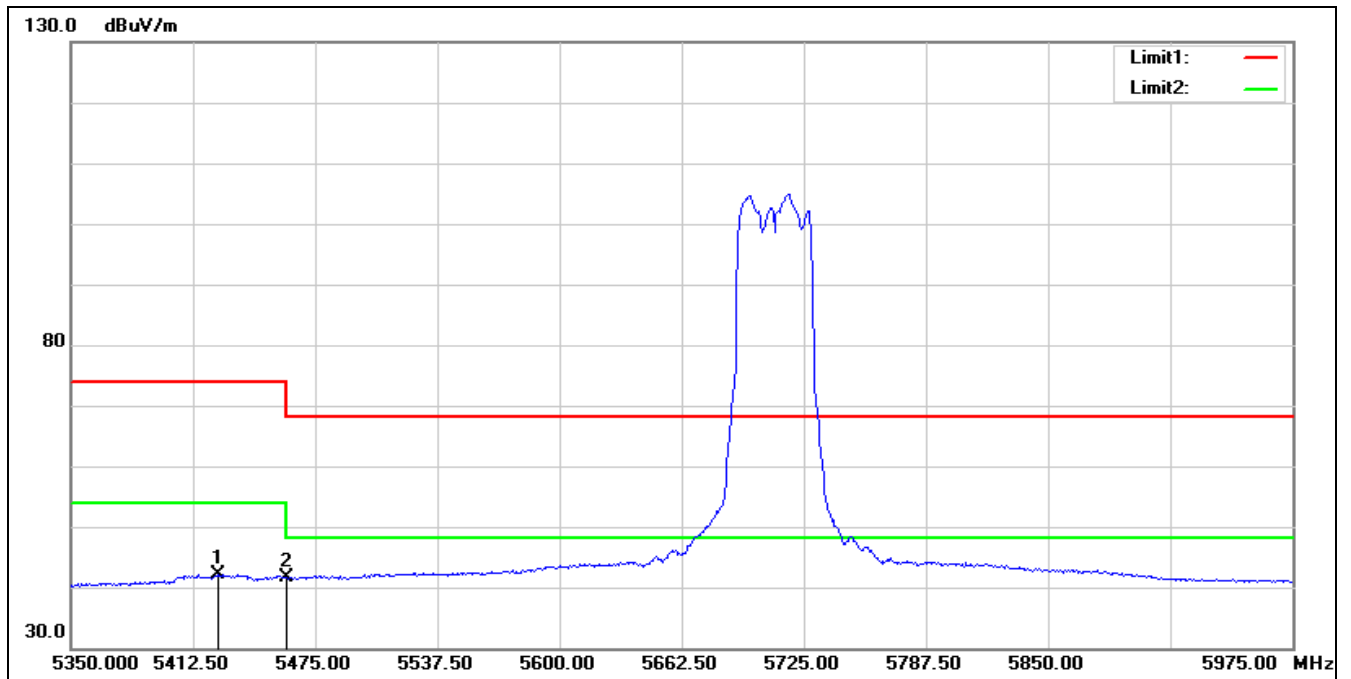


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5425.625	40.64	1.56	42.20	54.00	-11.80	AVG
2	5460.000	39.95	1.75	41.70	54.00	-12.30	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5710 MHz

Remark:

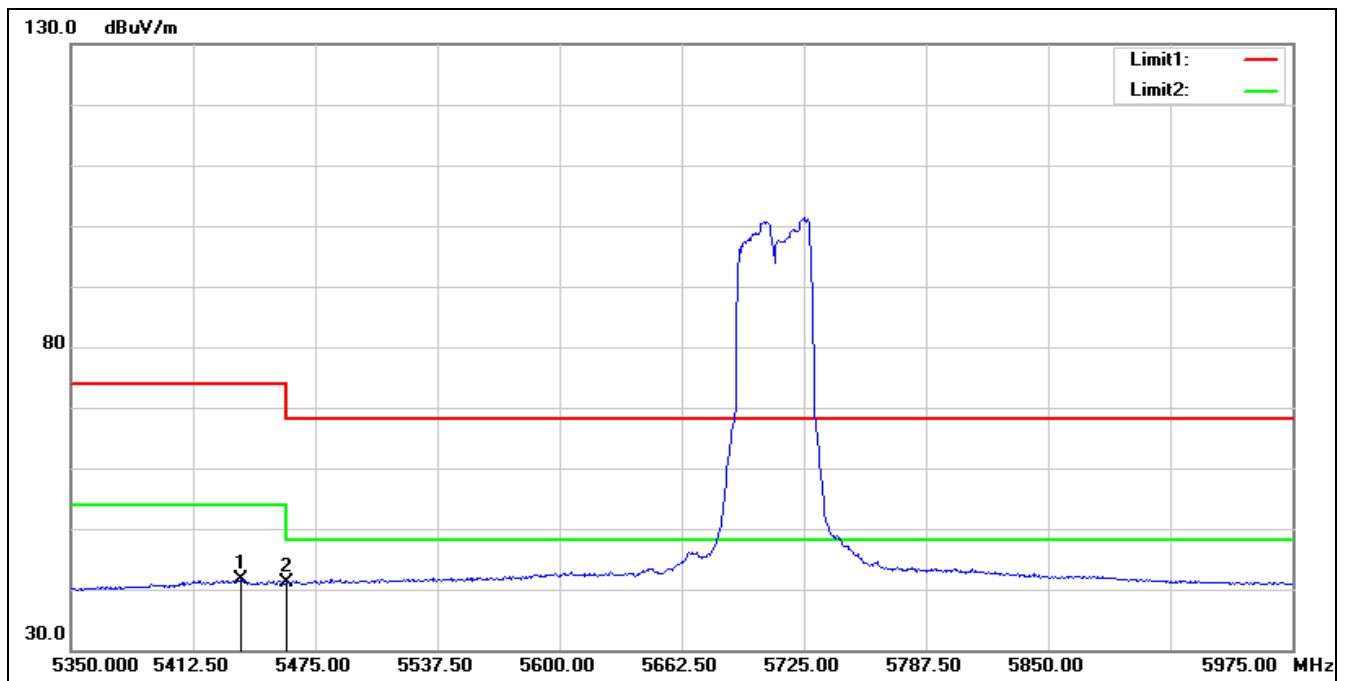

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5436.875	39.93	1.64	41.57	54.00	-12.43	AVG
2	5460.000	39.28	1.75	41.03	54.00	-12.97	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5210 MHz		
Remark:			

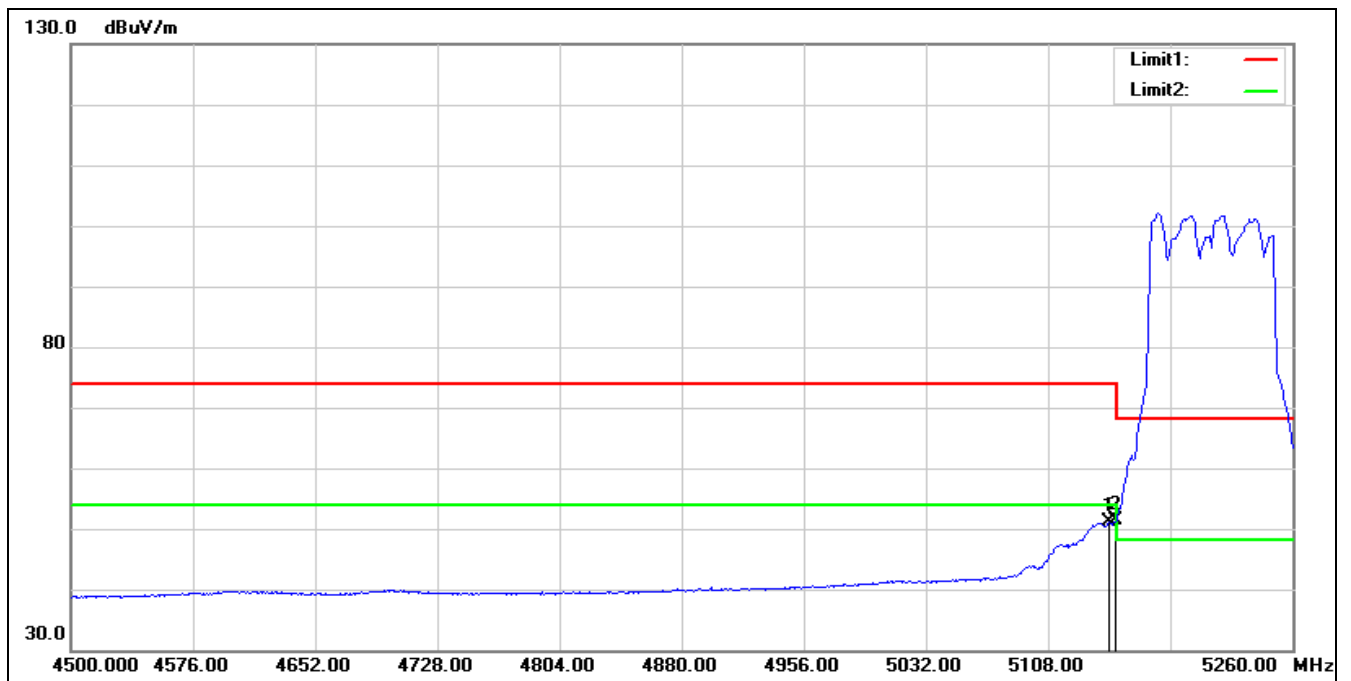


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.000	49.82	1.39	51.21	54.00	-2.79	AVG
2*	5150.000	49.98	1.38	51.36	54.00	-2.64	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5210 MHz

Remark:

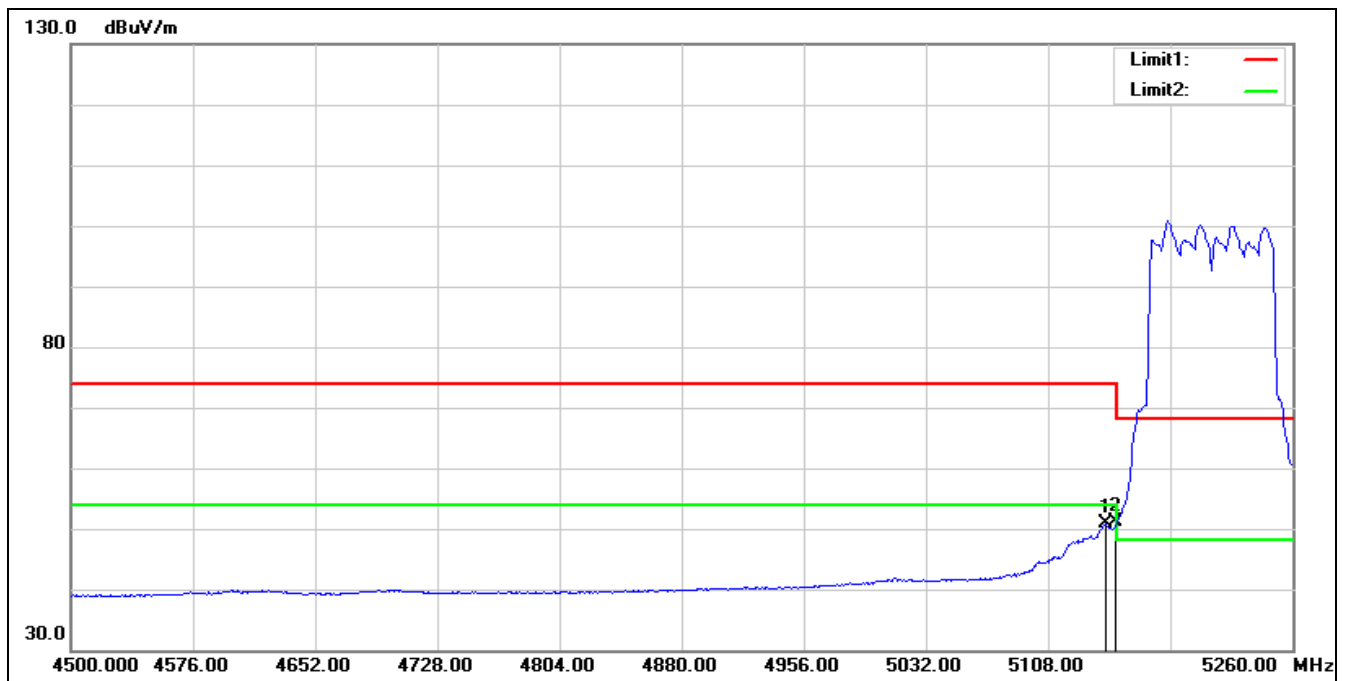


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.720	49.42	1.38	50.80	54.00	-3.20	AVG
2*	5150.000	49.65	1.38	51.03	54.00	-2.97	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT80 5290 MHz
Remark:

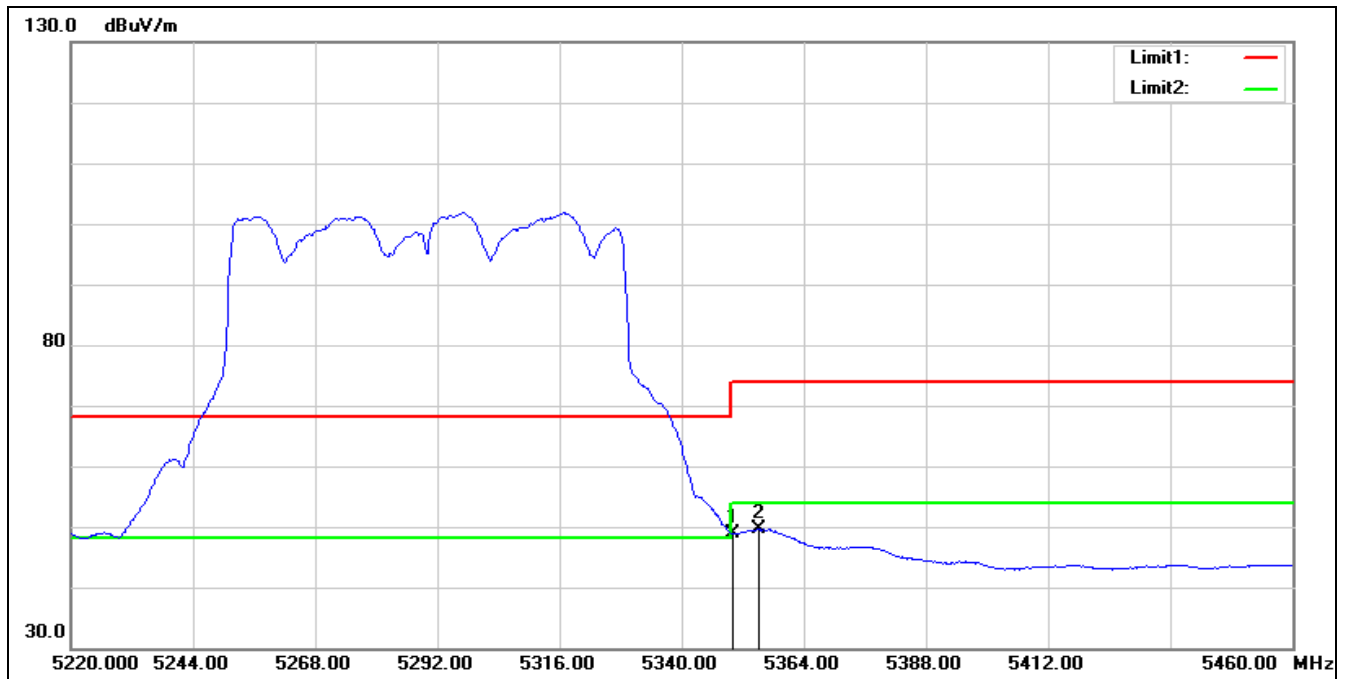


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	47.91	1.02	48.93	54.00	-5.07	AVG
2*	5355.120	48.57	1.06	49.63	54.00	-4.37	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5290 MHz		
Remark:			

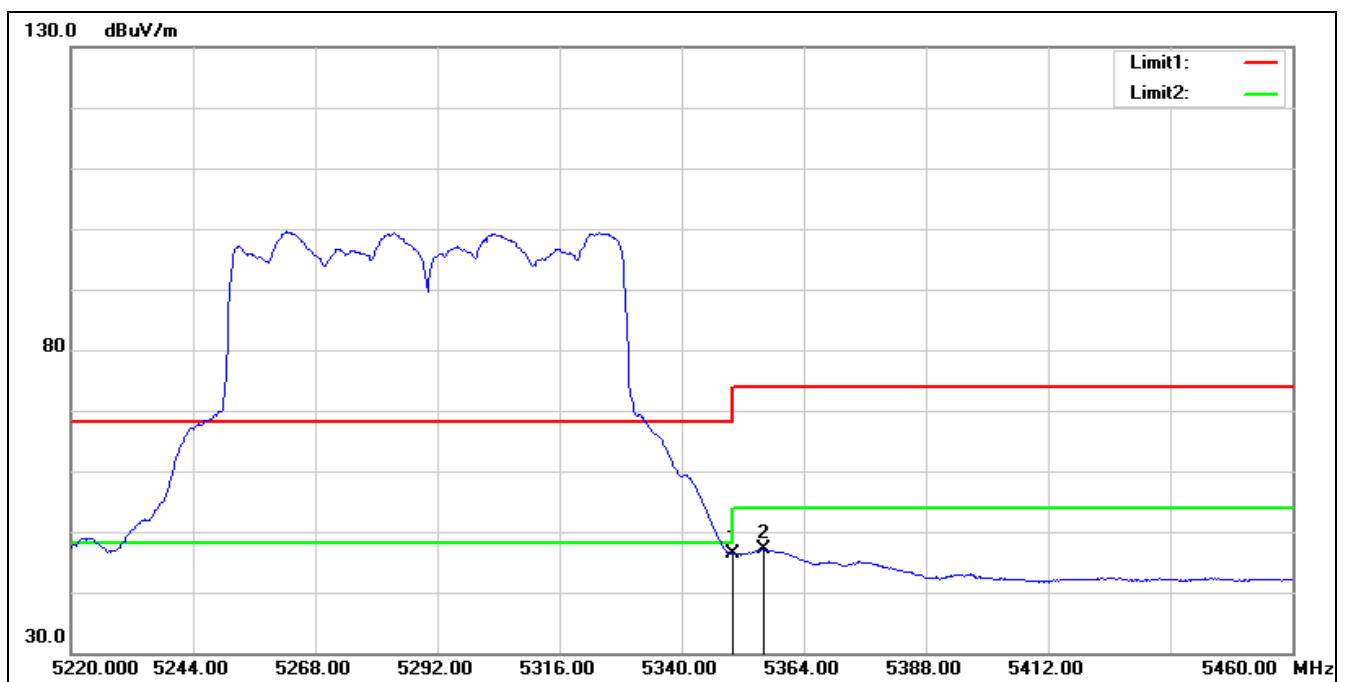


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.45	1.02	46.47	54.00	-7.53	AVG
2*	5356.080	46.03	1.07	47.10	54.00	-6.90	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5530 MHz		
Remark:			

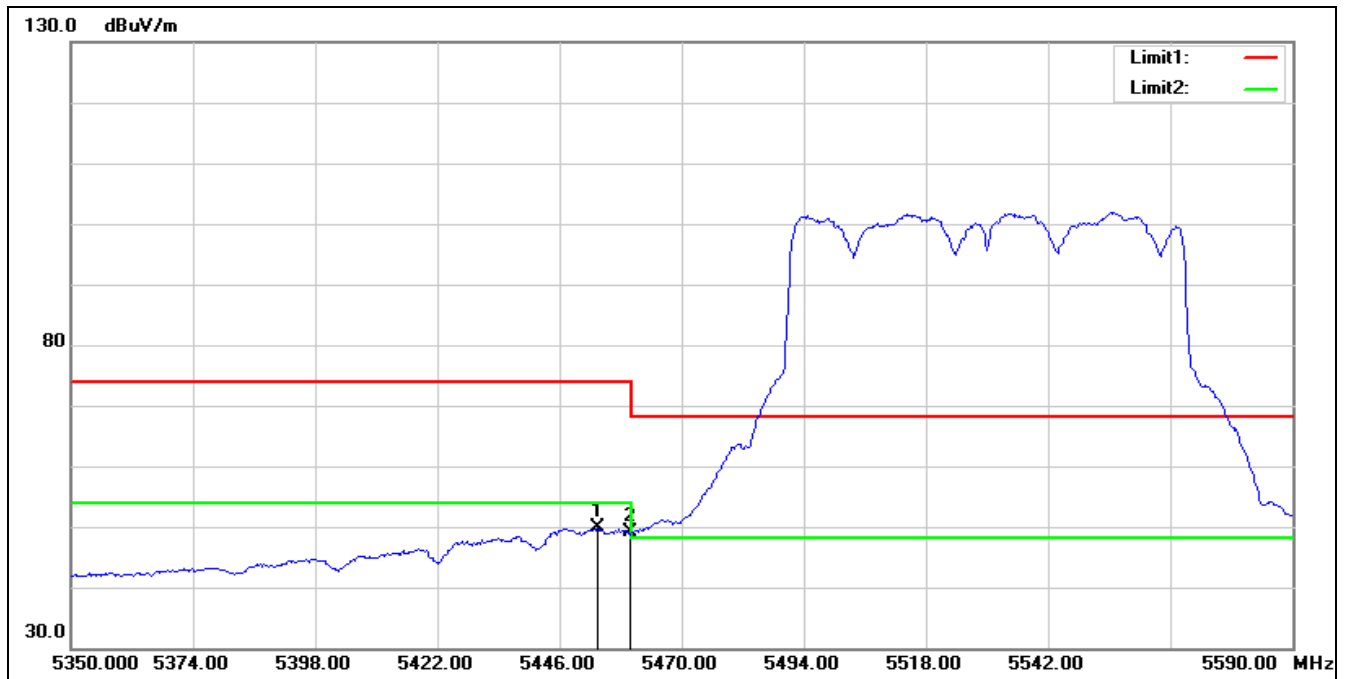


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5453.440	48.01	1.75	49.76	54.00	-4.24	AVG
2	5460.000	47.32	1.75	49.07	54.00	-4.93	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT80 5530 MHz
Remark:

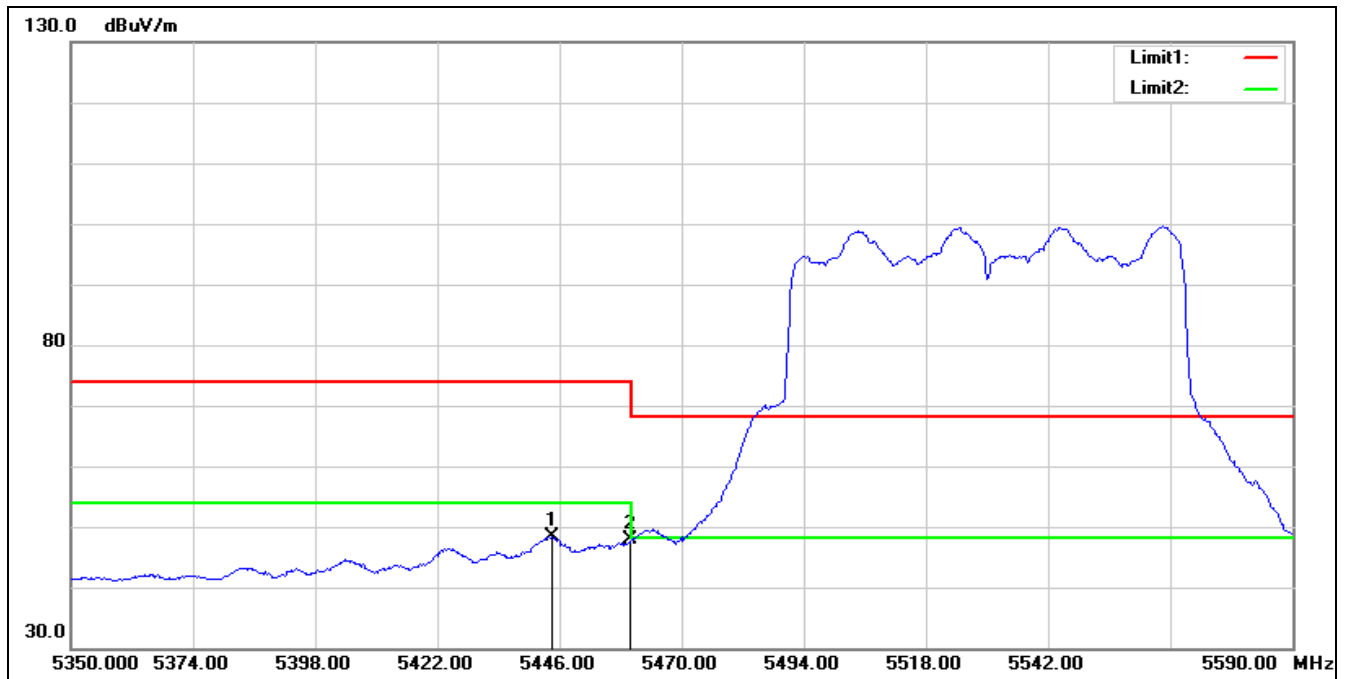


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5444.560	46.69	1.70	48.39	54.00	-5.61	AVG
2	5460.000	46.15	1.75	47.90	54.00	-6.10	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

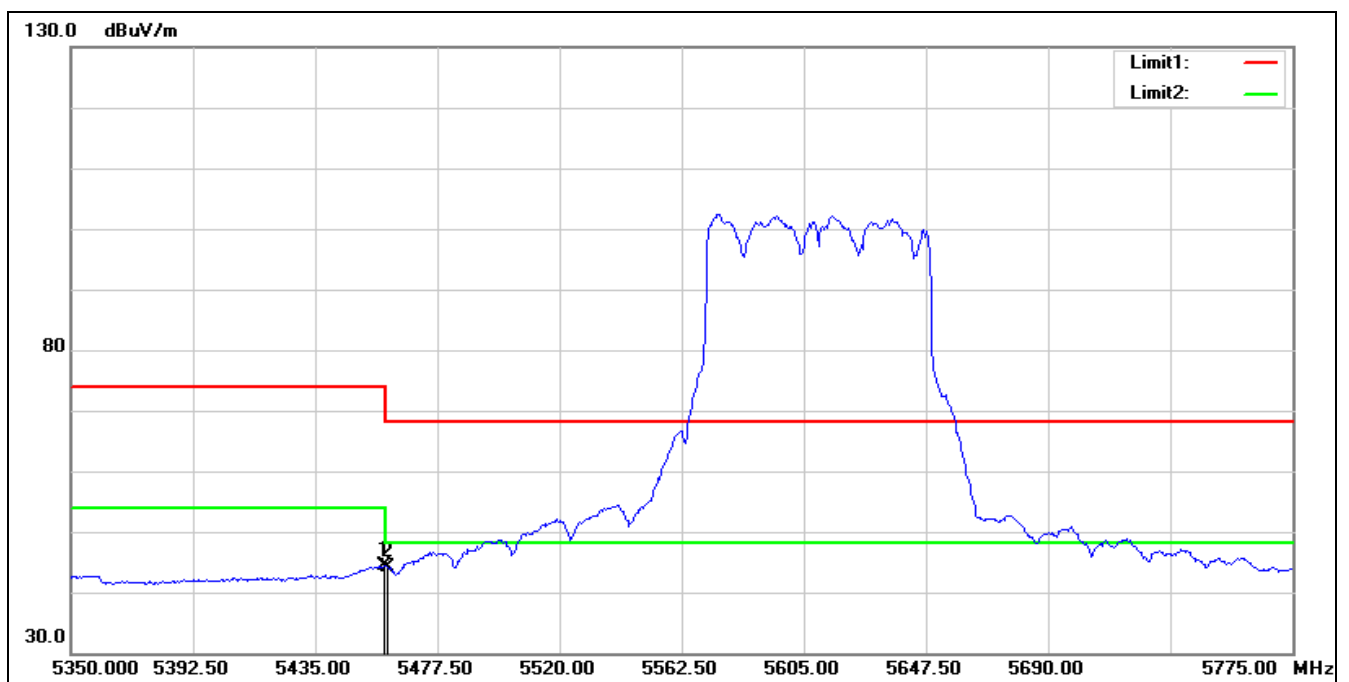


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.800	42.66	1.75	44.41	54.00	-9.59	AVG
2	5460.000	42.29	1.75	44.04	54.00	-9.96	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

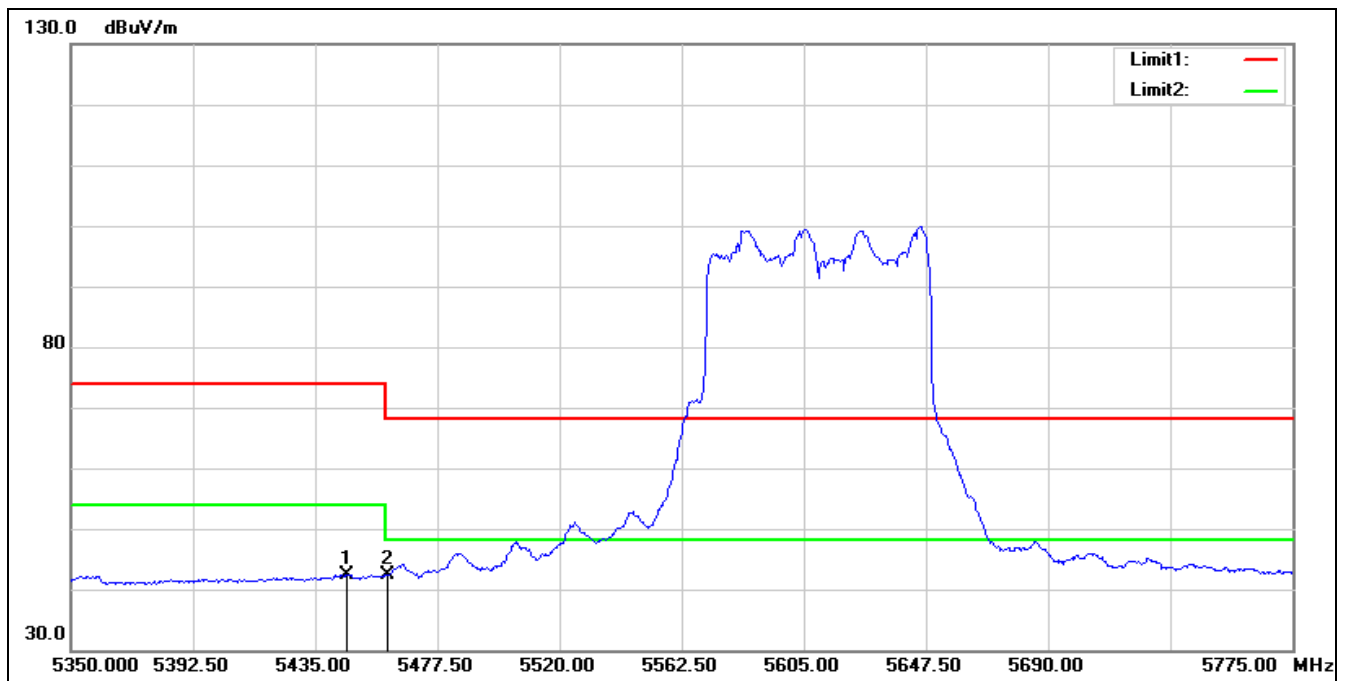


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5446.050	40.73	1.71	42.44	54.00	-11.56	AVG
2	5460.000	40.53	1.75	42.28	54.00	-11.72	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

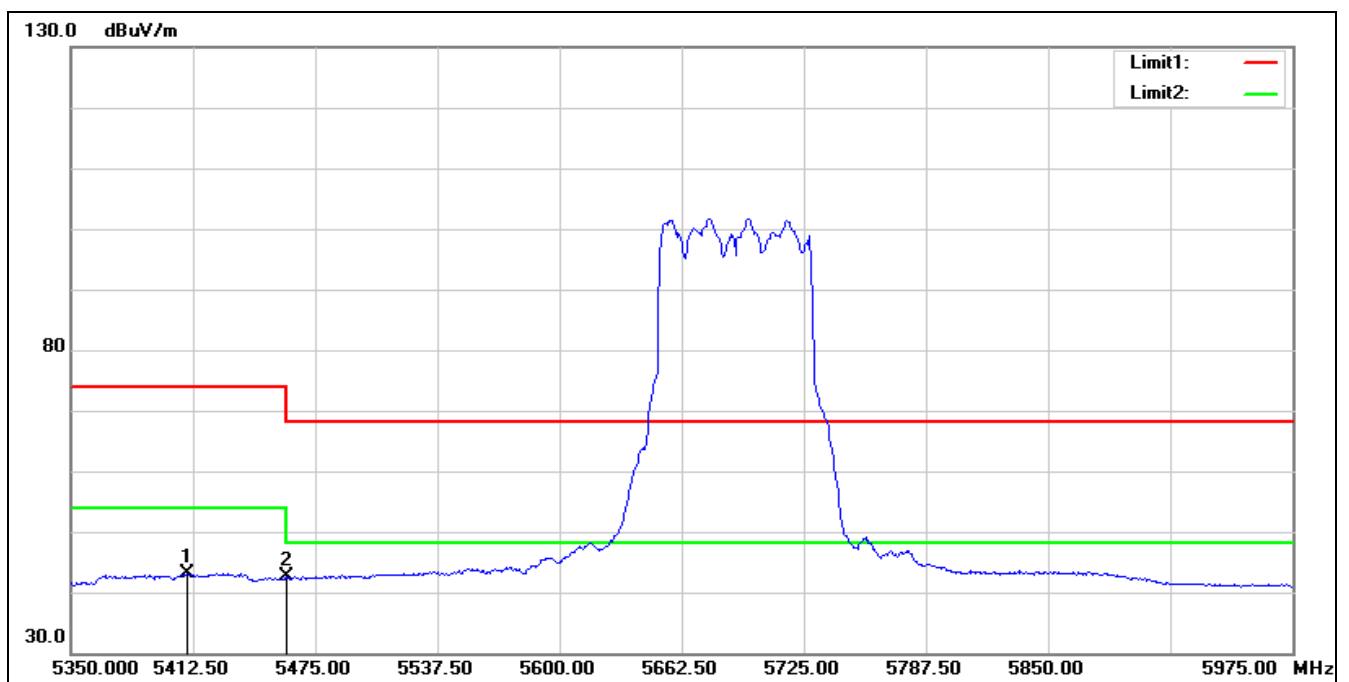


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5409.375	41.63	1.45	43.08	54.00	-10.92	AVG
2	5460.000	40.78	1.75	42.53	54.00	-11.47	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT80 5690 MHz
Remark:

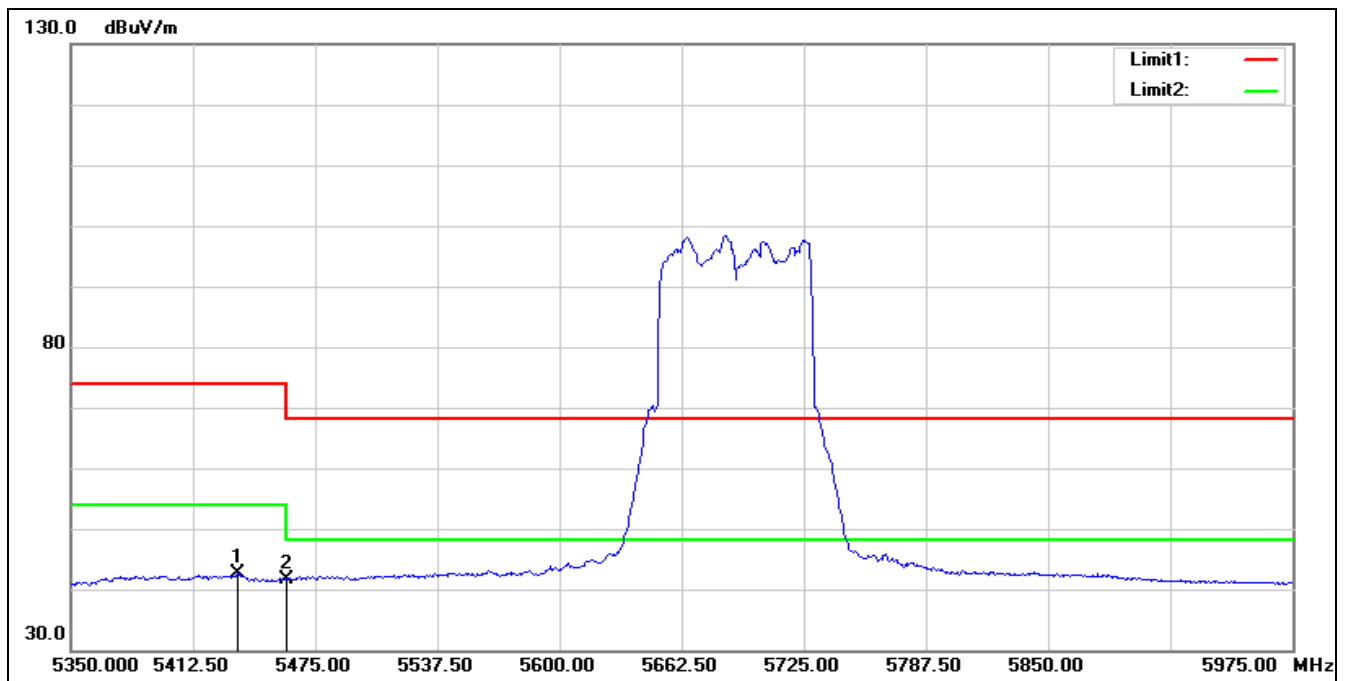


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5435.000	40.92	1.63	42.55	54.00	-11.45	AVG
2	5460.000	39.97	1.75	41.72	54.00	-12.28	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT160 5250 MHz
Remark:

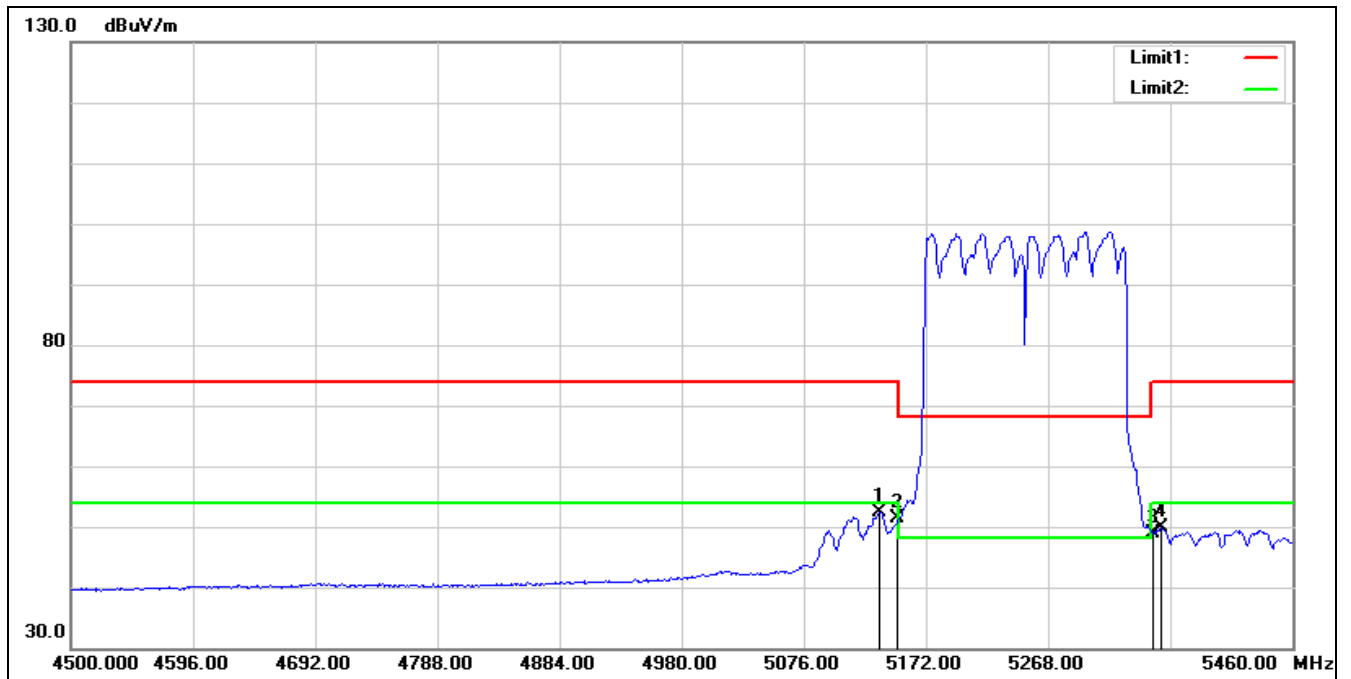


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5135.520	51.05	1.40	52.45	54.00	-1.55	AVG
2	5150.000	50.03	1.38	51.41	54.00	-2.59	AVG
3	5350.000	47.95	1.02	48.97	54.00	-5.03	AVG
4	5357.280	48.80	1.07	49.87	54.00	-4.13	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5250 MHz		
Remark:			

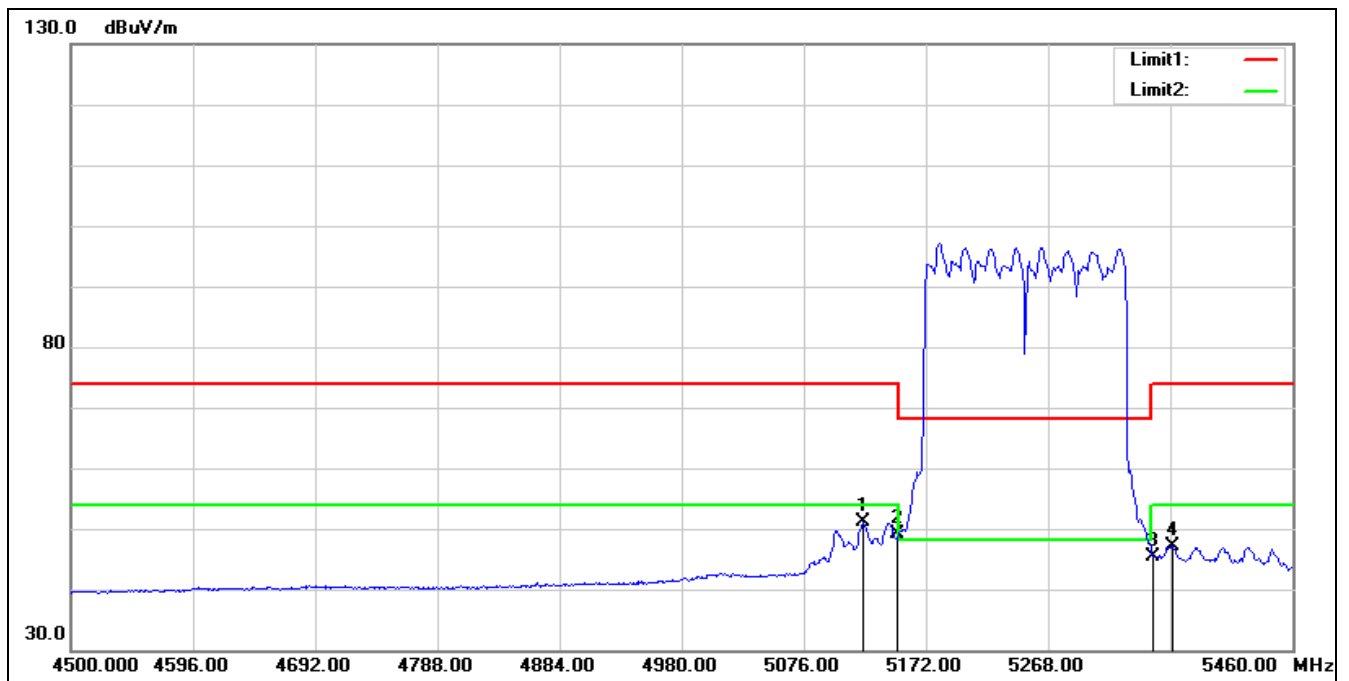

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5123.040	49.71	1.40	51.11	54.00	-2.89	AVG
2	5150.000	47.68	1.38	49.06	54.00	-4.94	AVG
3	5350.000	44.48	1.02	45.50	54.00	-8.50	AVG
4	5365.920	45.98	1.14	47.12	54.00	-6.88	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

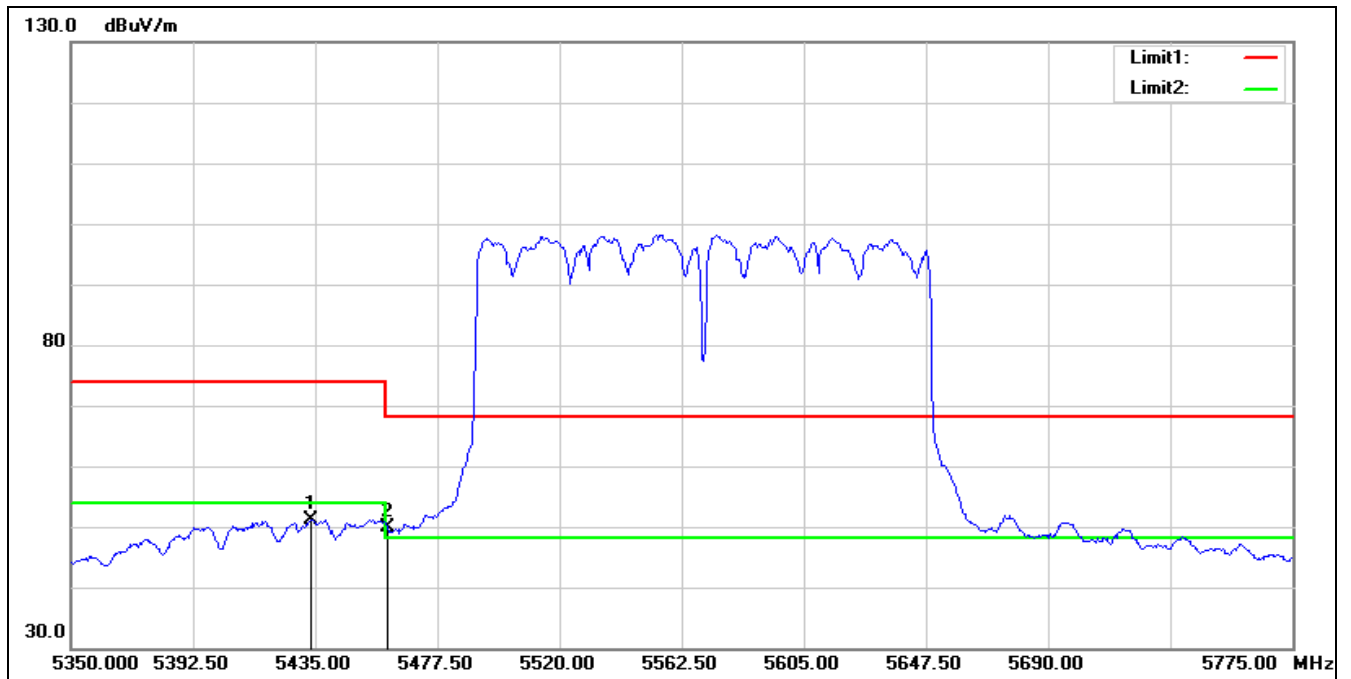


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5433.725	49.52	1.62	51.14	54.00	-2.86	AVG
2	5460.000	48.05	1.75	49.80	54.00	-4.20	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT160 5570 MHz

Remark:

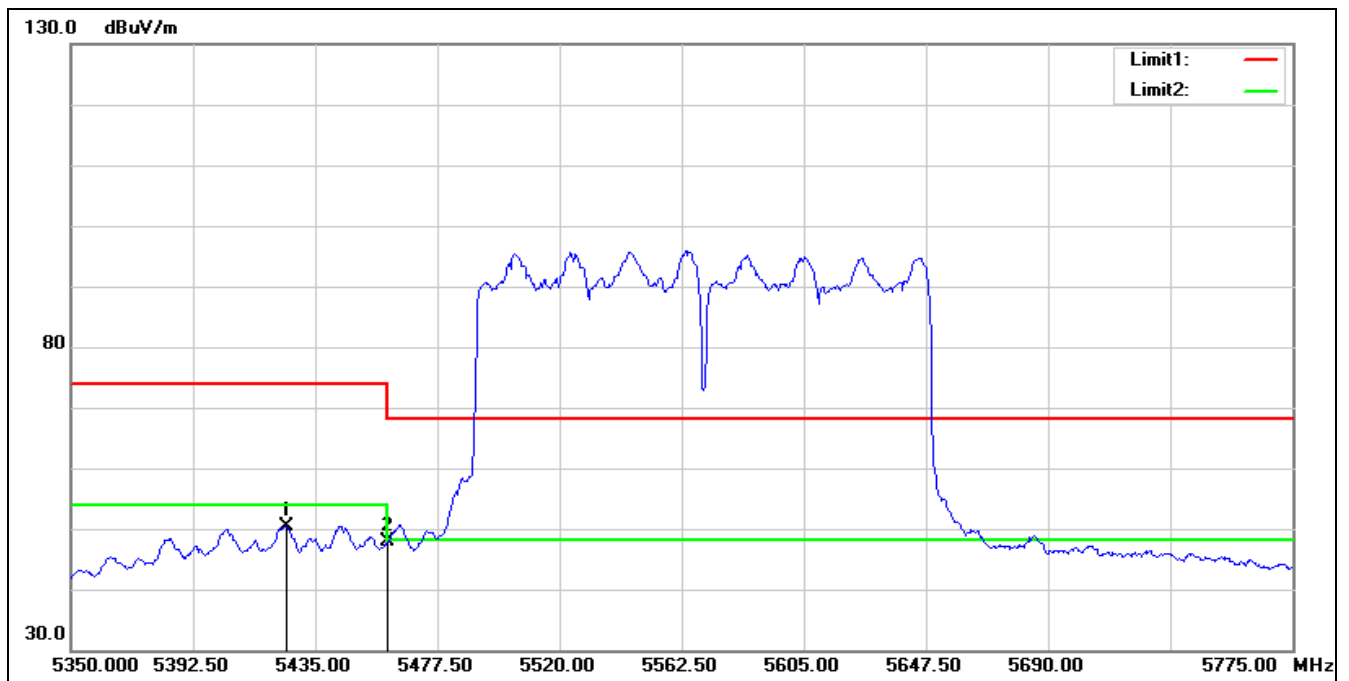


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5425.225	48.92	1.56	50.48	54.00	-3.52	AVG
2	5460.000	46.07	1.75	47.82	54.00	-6.18	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5180 MHz
Remark:

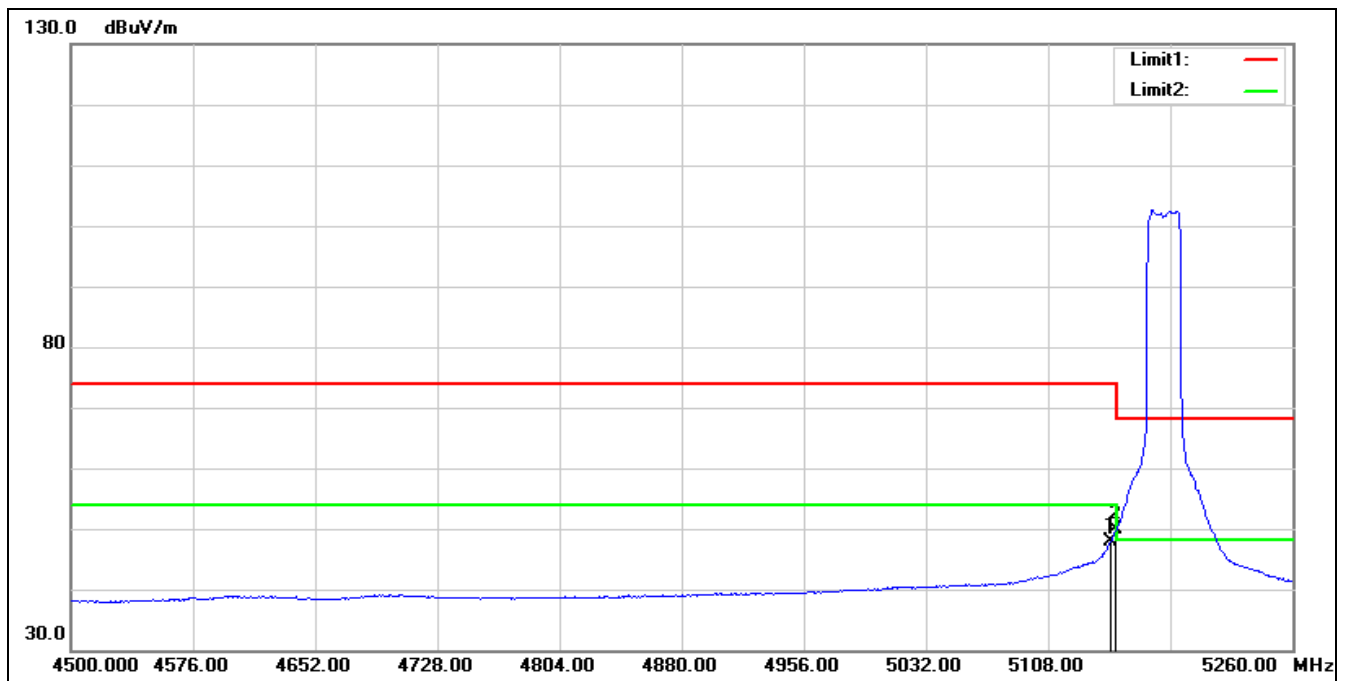


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	46.39	1.39	47.78	54.00	-6.22	AVG
2*	5150.000	48.38	1.38	49.76	54.00	-4.24	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5180 MHz
Remark:

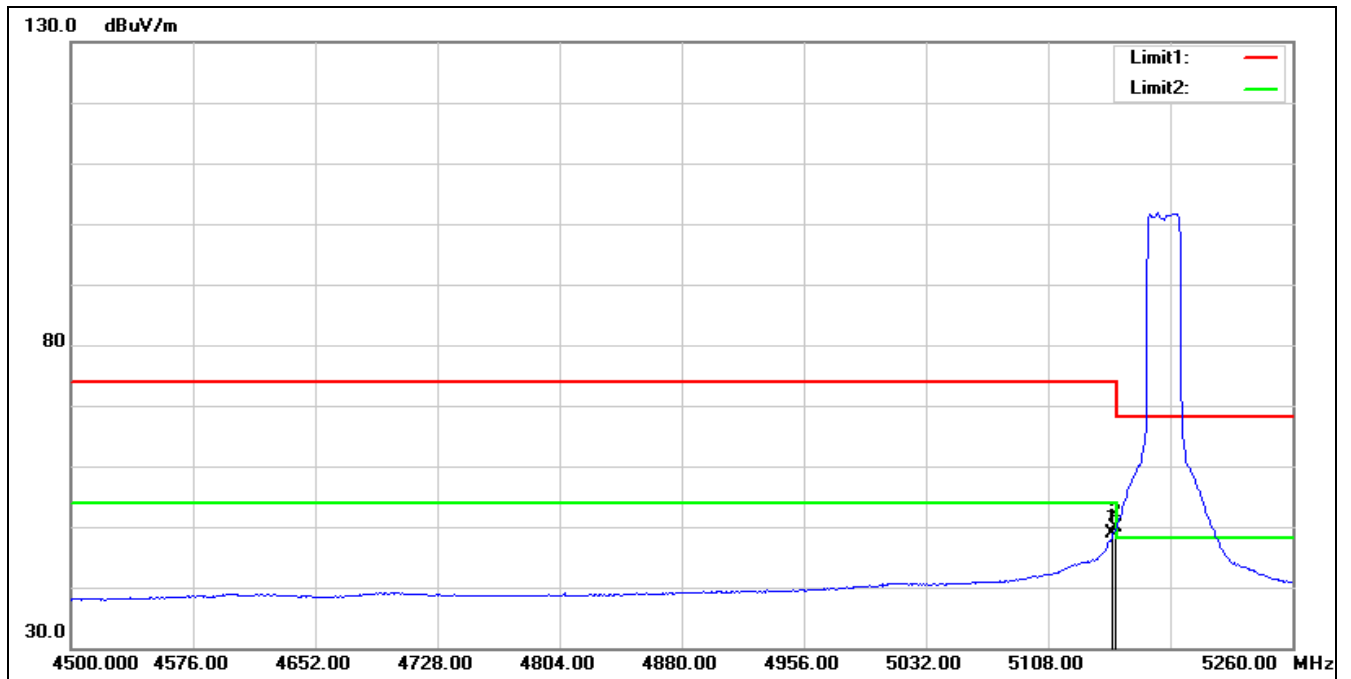


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	47.39	1.38	48.77	54.00	-5.23	AVG
2*	5150.000	48.56	1.38	49.94	54.00	-4.06	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5200 MHz
Remark:

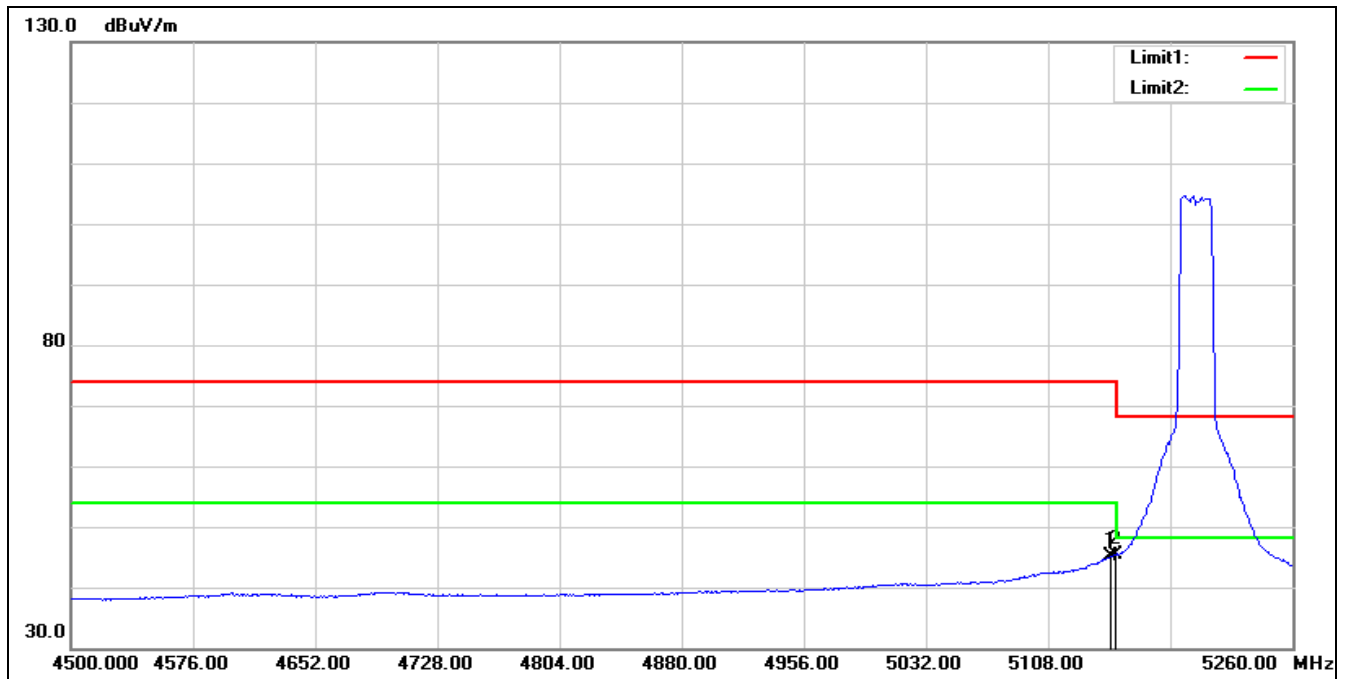


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	43.70	1.39	45.09	54.00	-8.91	AVG
2*	5150.000	44.09	1.38	45.47	54.00	-8.53	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

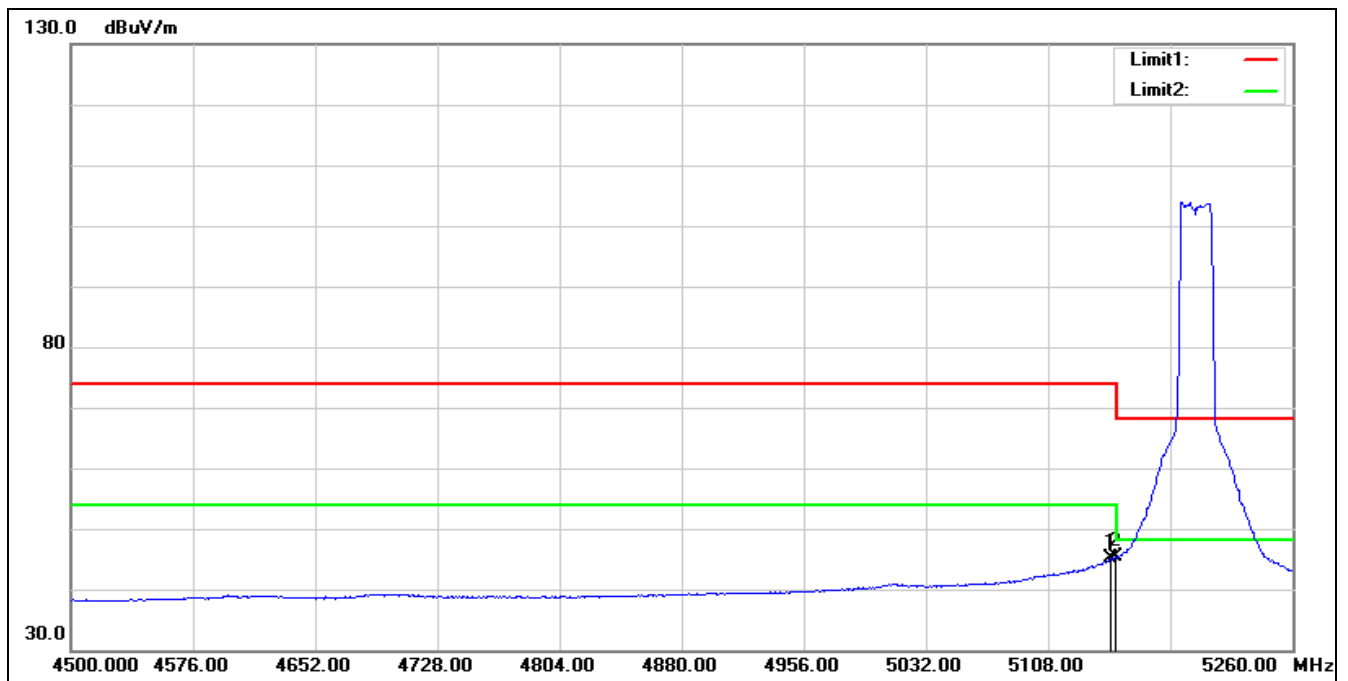


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	43.62	1.39	45.01	54.00	-8.99	AVG
2*	5150.000	44.02	1.38	45.40	54.00	-8.60	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5240 MHz		
Remark:			

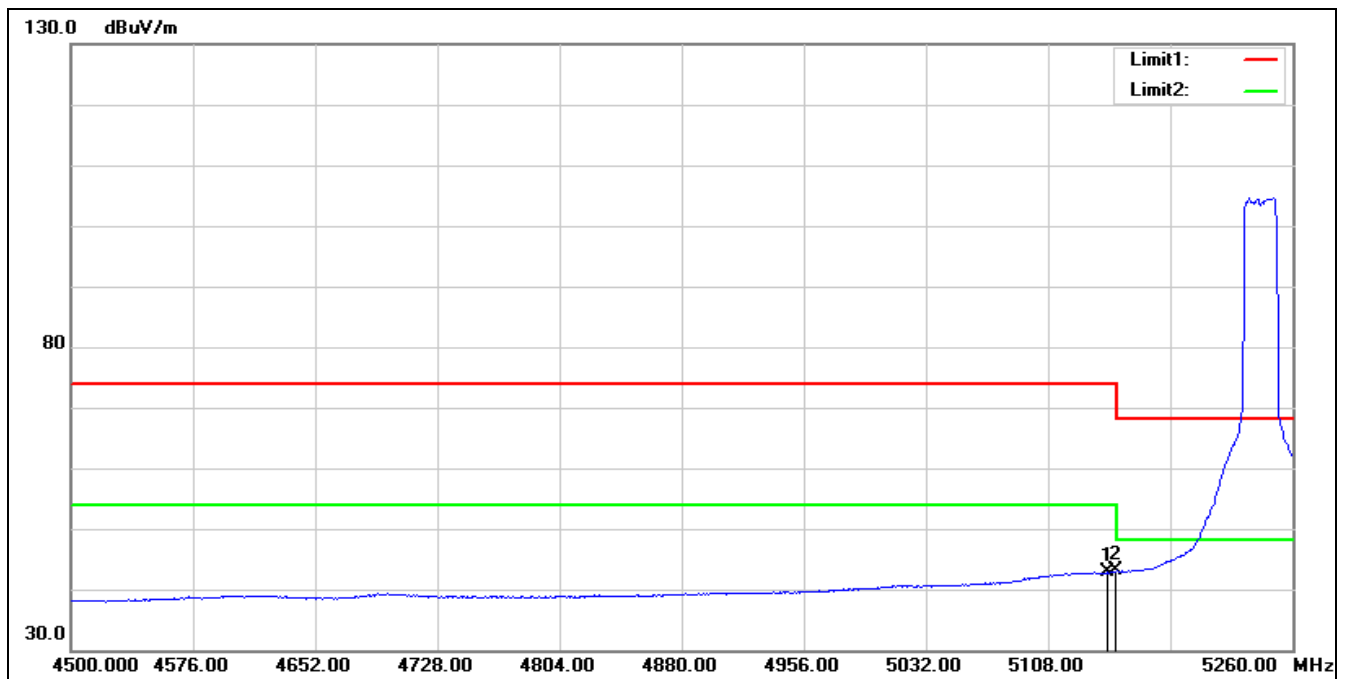


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	41.50	1.38	42.88	54.00	-11.12	AVG
2*	5150.000	41.72	1.38	43.10	54.00	-10.90	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5240 MHz		
Remark:			

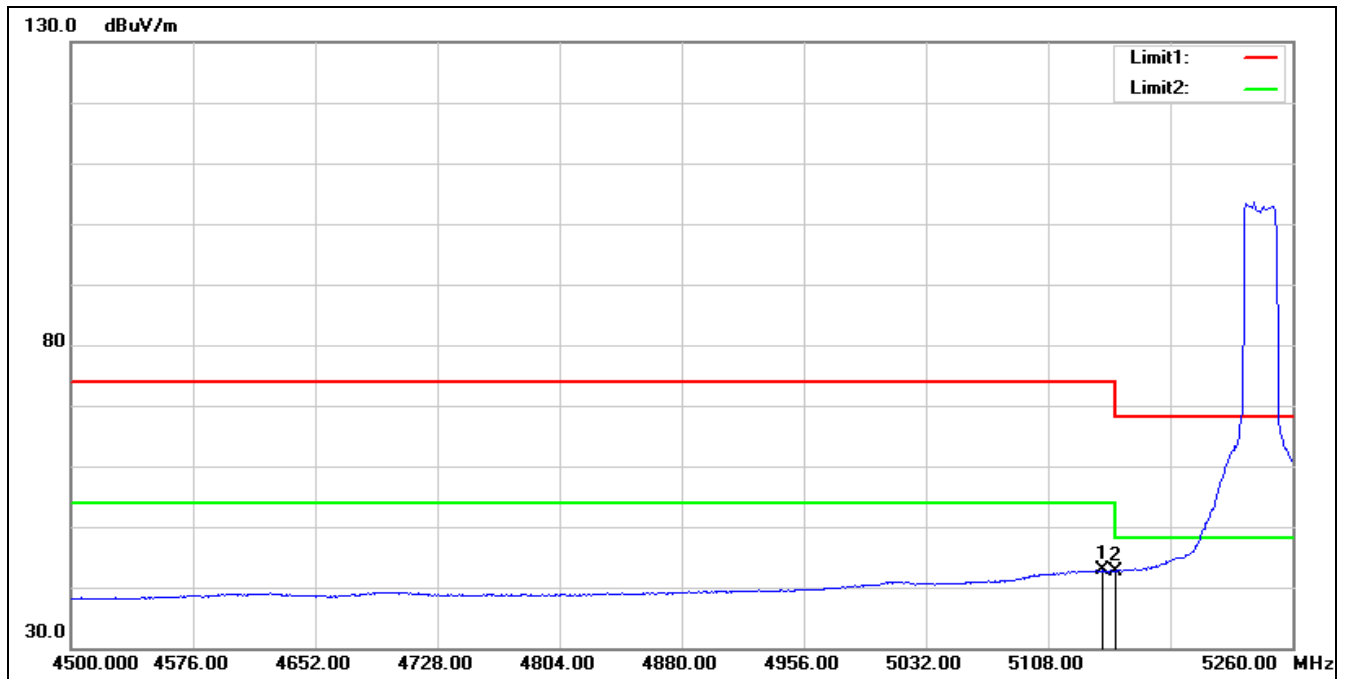

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5142.200	41.41	1.39	42.80	54.00	-11.20	AVG
2	5150.000	41.28	1.38	42.66	54.00	-11.34	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5260 MHz		
Remark:			

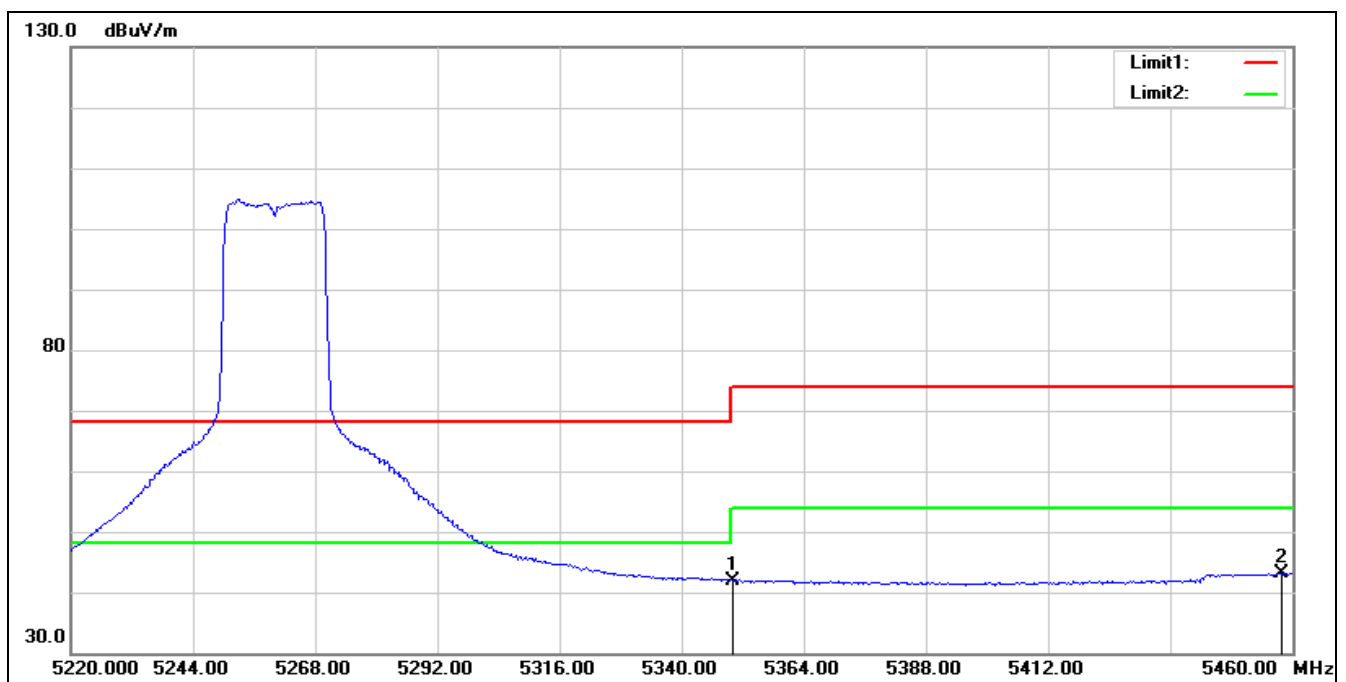


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.85	1.02	41.87	54.00	-12.13	AVG
2*	5457.840	41.42	1.75	43.17	54.00	-10.83	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5260 MHz

Remark:

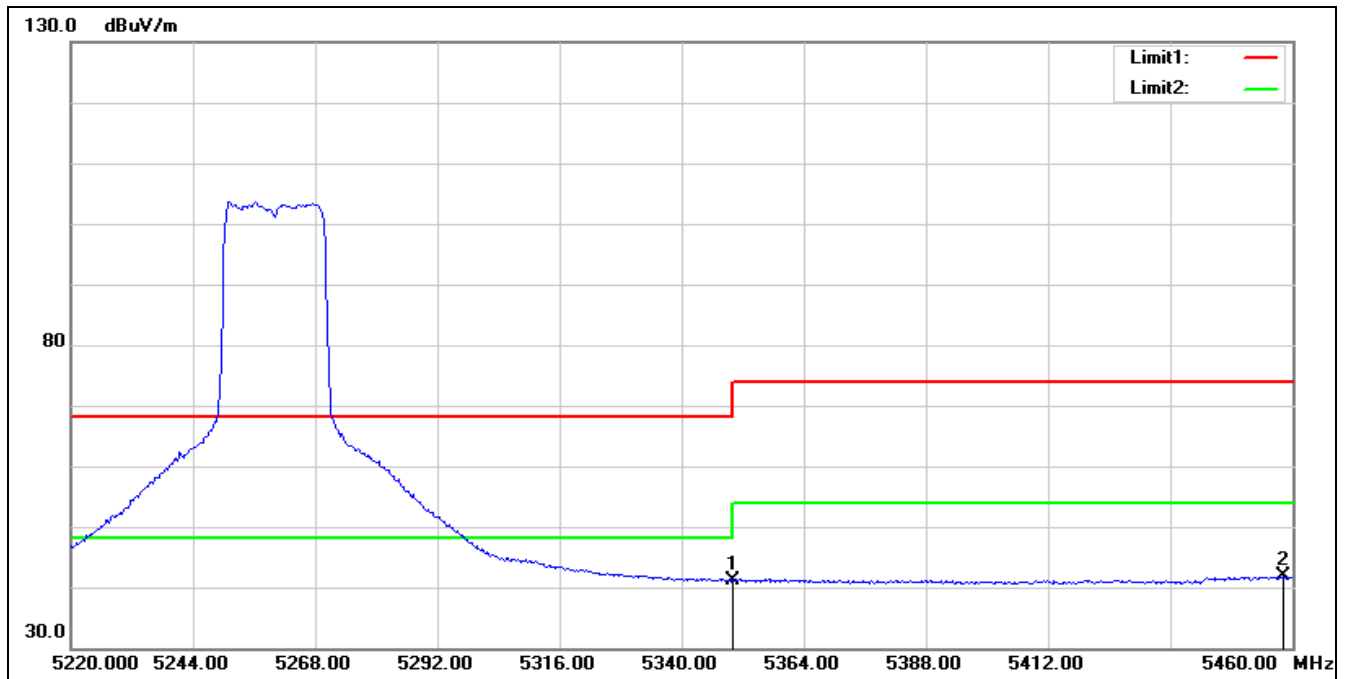


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.18	1.02	41.20	54.00	-12.80	AVG
2*	5458.320	40.01	1.75	41.76	54.00	-12.24	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5280 MHz

Remark:

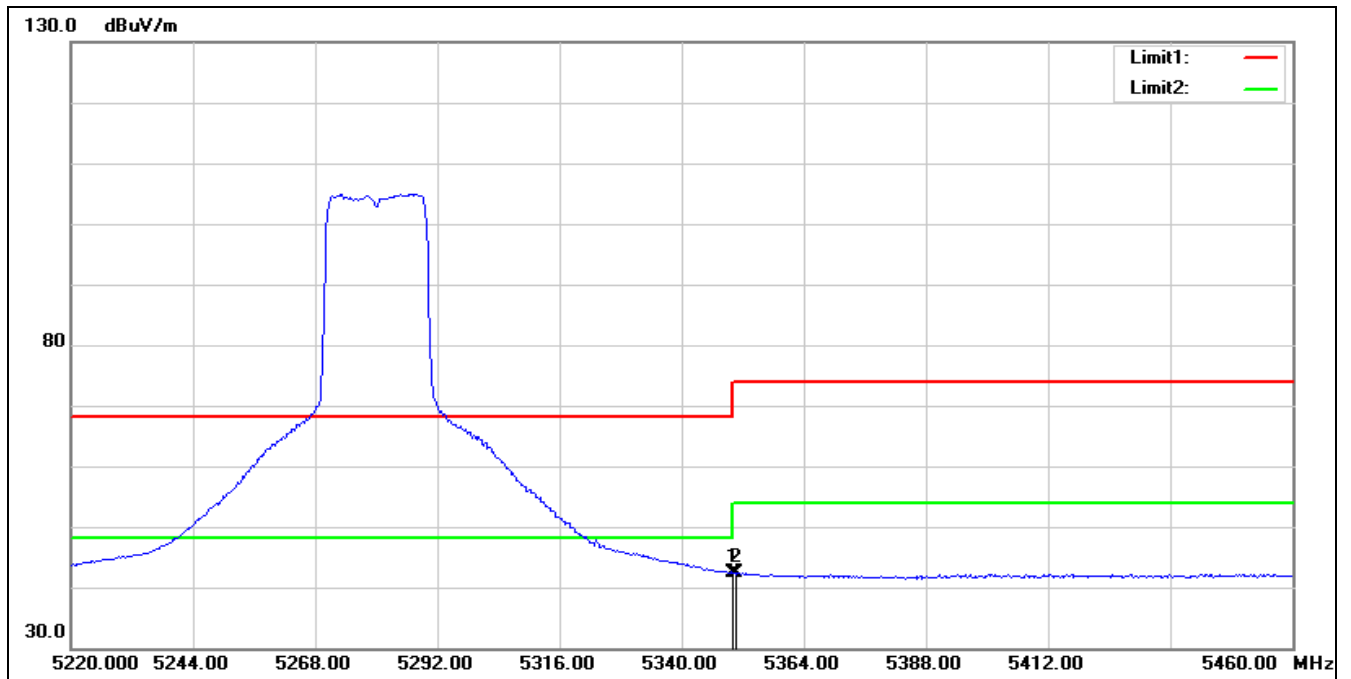

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.31	1.02	42.33	54.00	-11.67	AVG
2*	5350.800	41.33	1.02	42.35	54.00	-11.65	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5280 MHz		
Remark:			

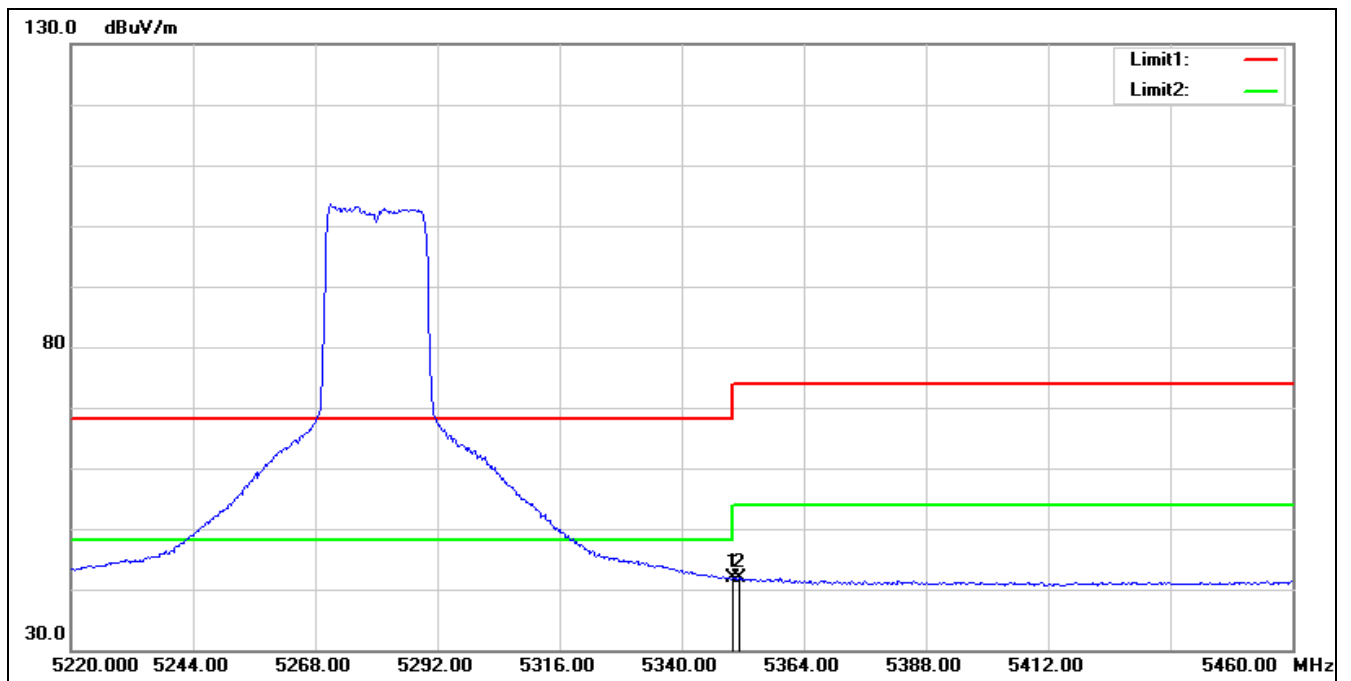


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	40.75	1.02	41.77	54.00	-12.23	AVG
2*	5351.280	40.77	1.03	41.80	54.00	-12.20	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5320 MHz

Remark:

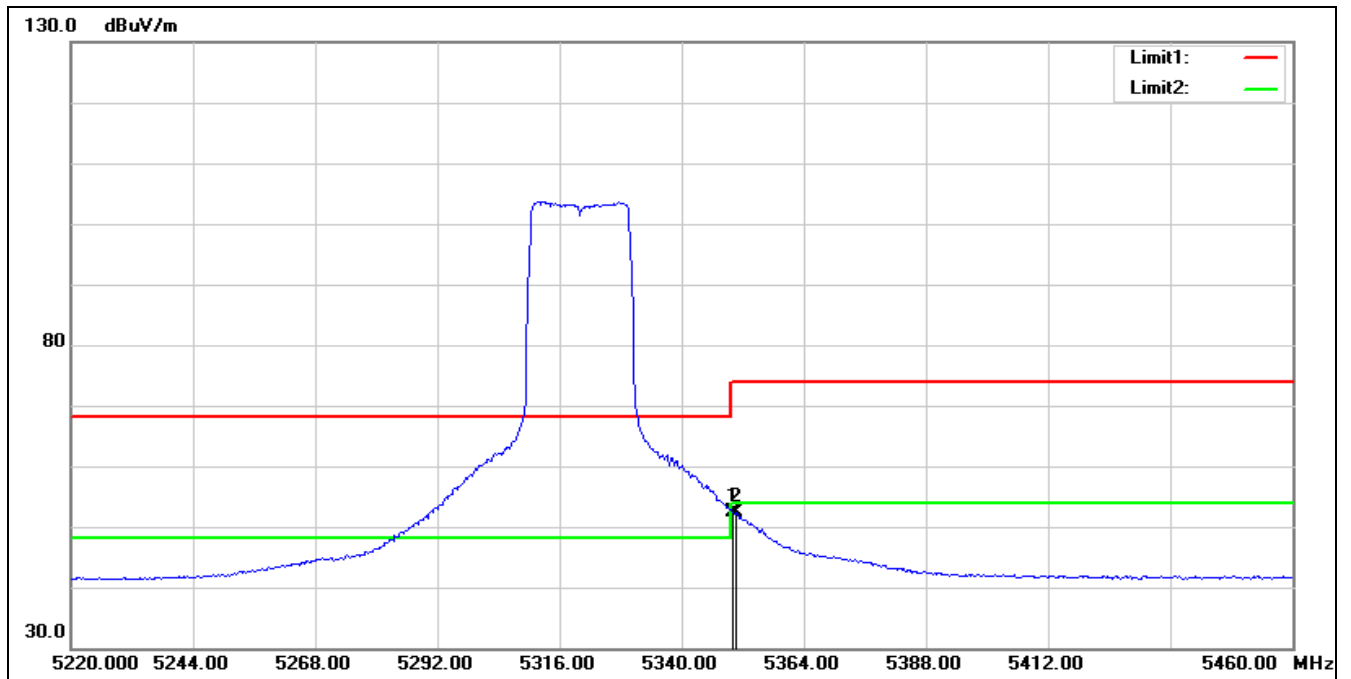


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	51.98	1.02	53.00	54.00	-1.00	AVG
2	5350.800	51.96	1.02	52.98	54.00	-1.02	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5320 MHz

Remark:

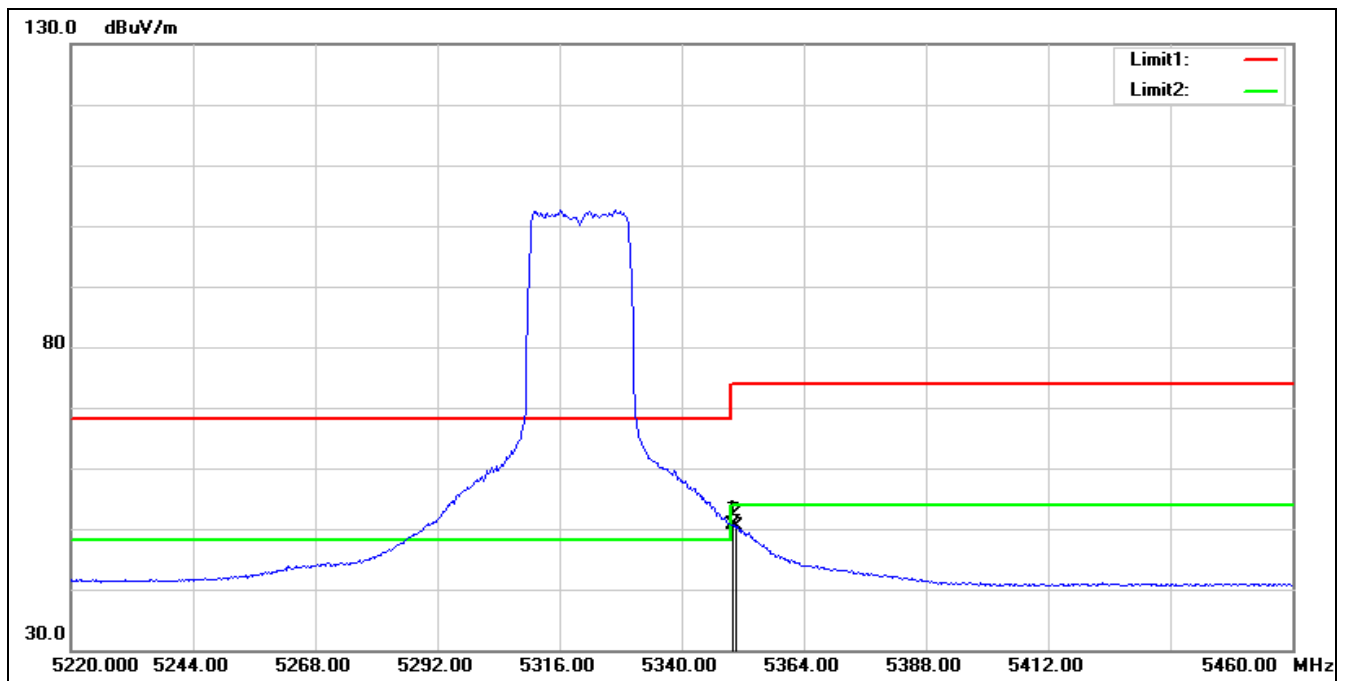


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	49.51	1.02	50.53	54.00	-3.47	AVG
2	5350.800	49.46	1.02	50.48	54.00	-3.52	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5500 MHz		
Remark:			

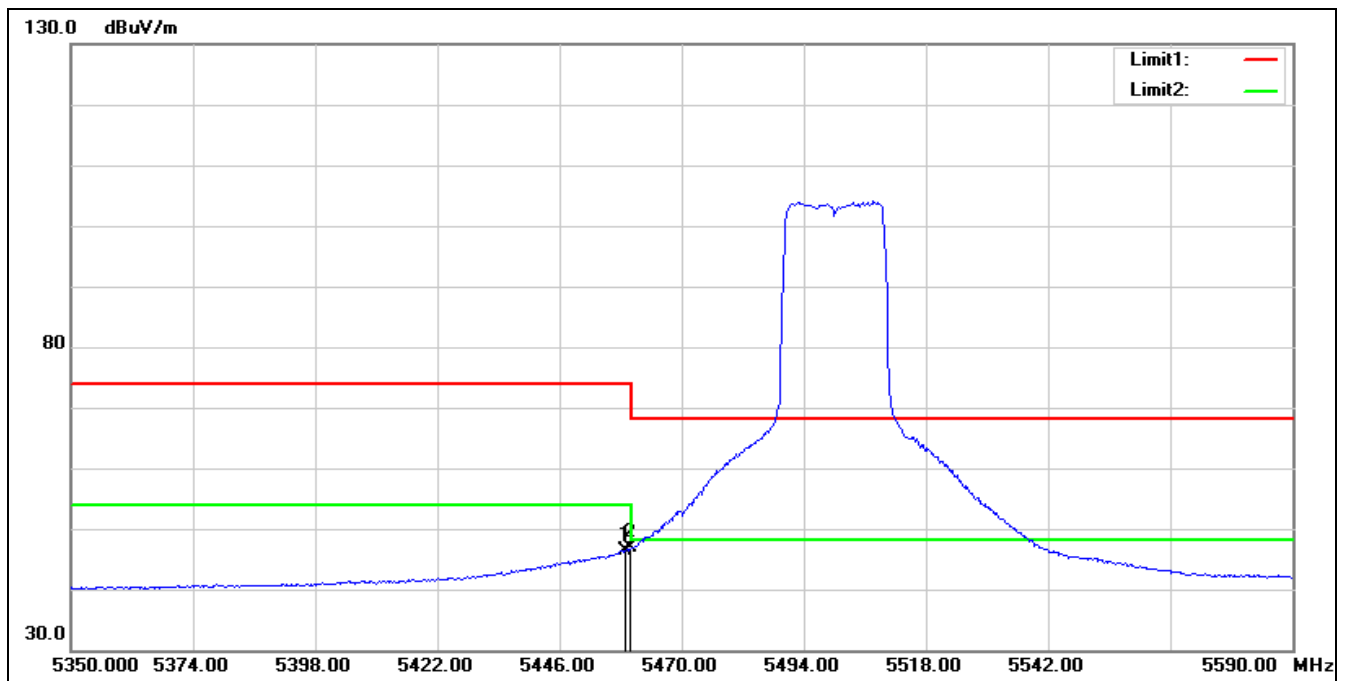


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.960	44.74	1.75	46.49	54.00	-7.51	AVG
2*	5460.000	45.09	1.75	46.84	54.00	-7.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5500 MHz		
Remark:			

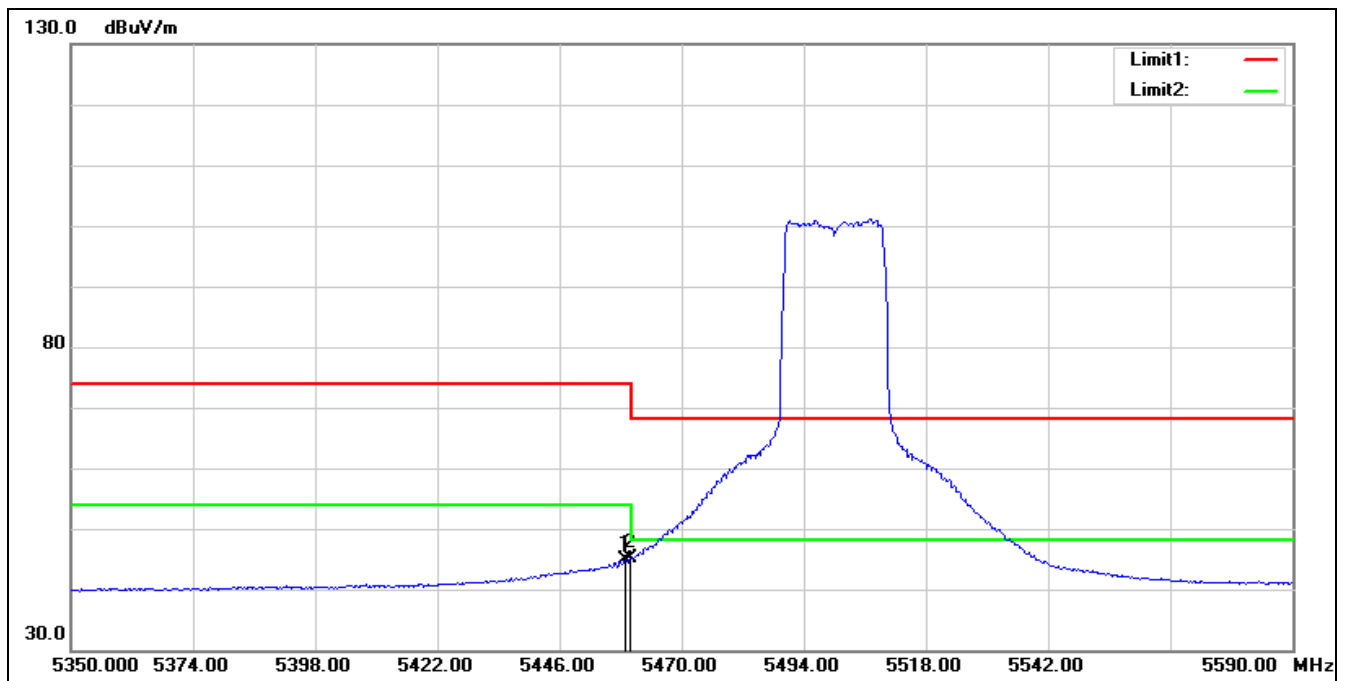


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.960	43.09	1.75	44.84	54.00	-9.16	AVG
2*	5460.000	43.37	1.75	45.12	54.00	-8.88	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5560 MHz		
Remark:			

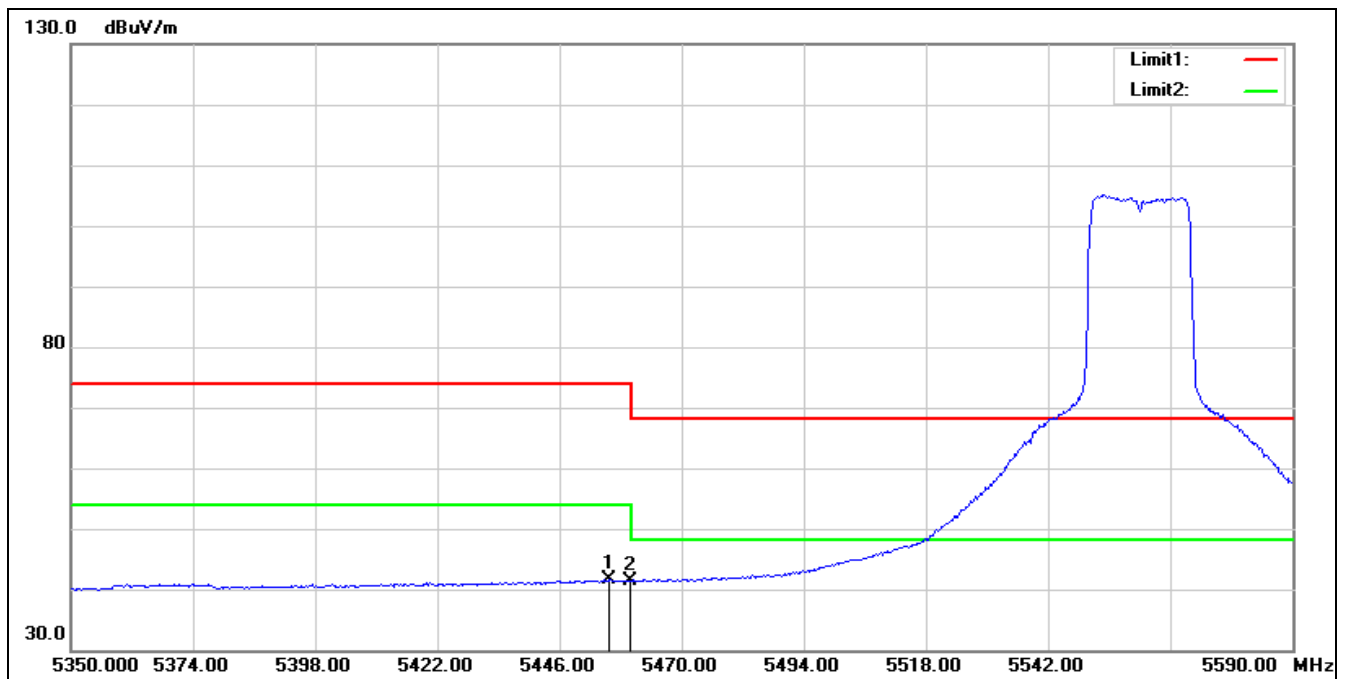


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5455.600	39.78	1.75	41.53	54.00	-12.47	AVG
2	5460.000	39.68	1.75	41.43	54.00	-12.57	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5560 MHz		
Remark:			

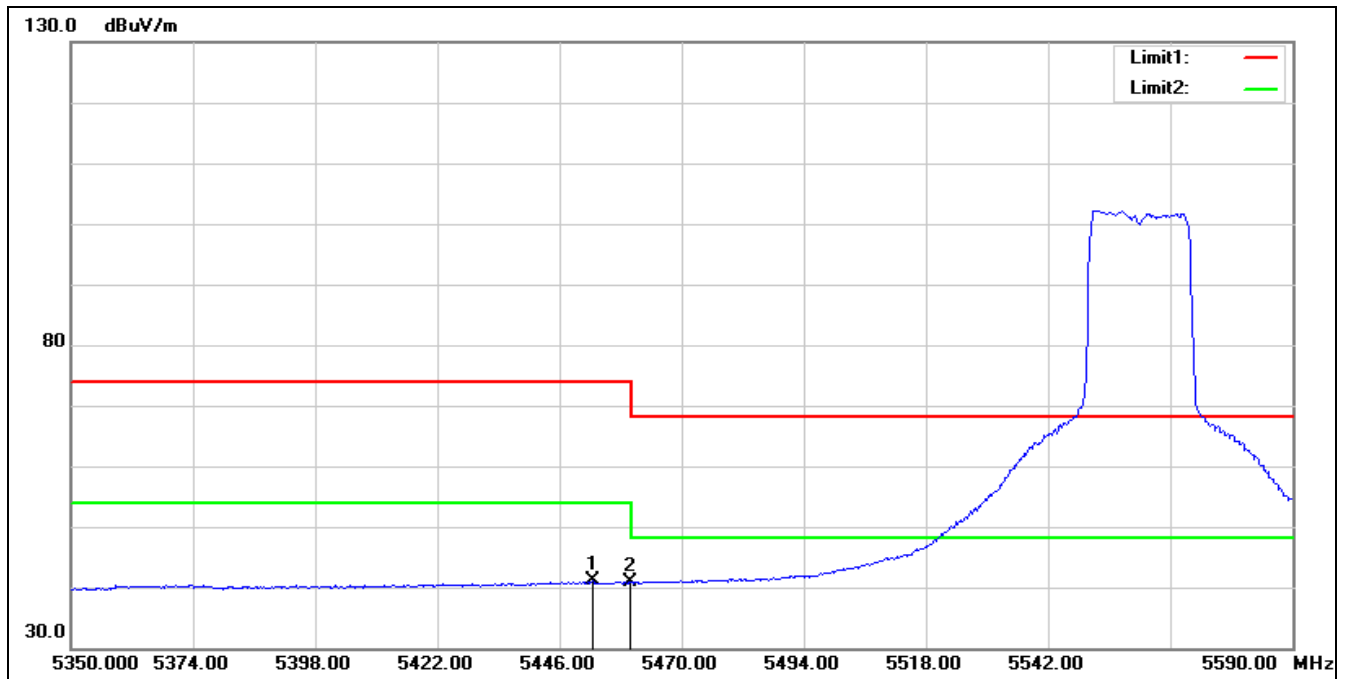

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5452.480	39.31	1.75	41.06	54.00	-12.94	AVG
2	5460.000	39.04	1.75	40.79	54.00	-13.21	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

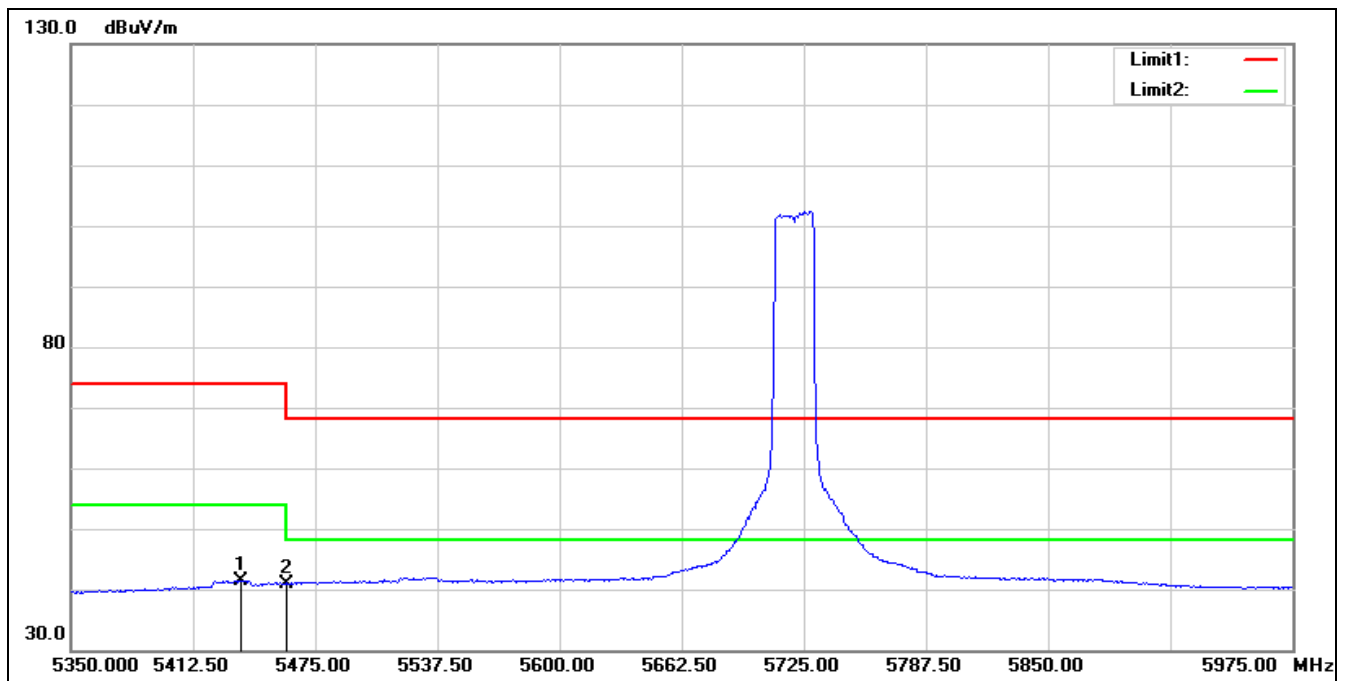


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5436.875	39.79	1.64	41.43	54.00	-12.57	AVG
2	5460.000	39.20	1.75	40.95	54.00	-13.05	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5720 MHz

Remark:

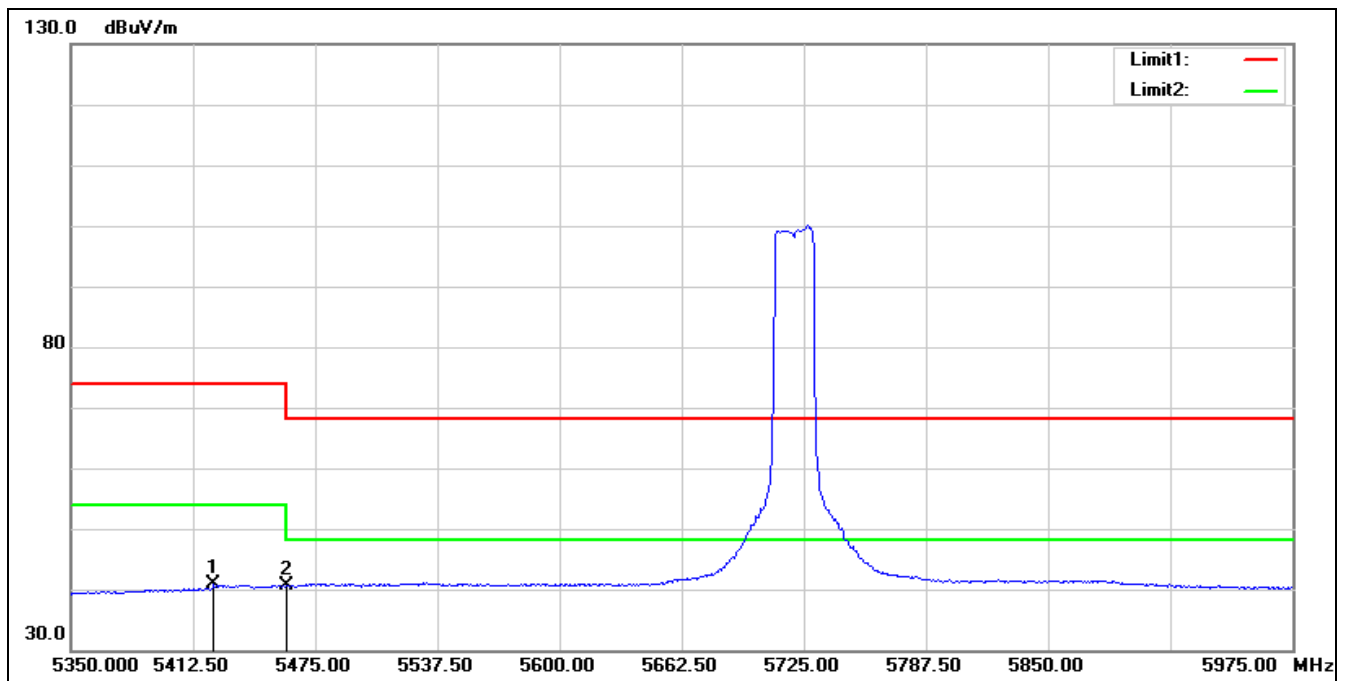


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5423.125	39.23	1.54	40.77	54.00	-13.23	AVG
2	5460.000	38.80	1.75	40.55	54.00	-13.45	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5190 MHz		
Remark:			

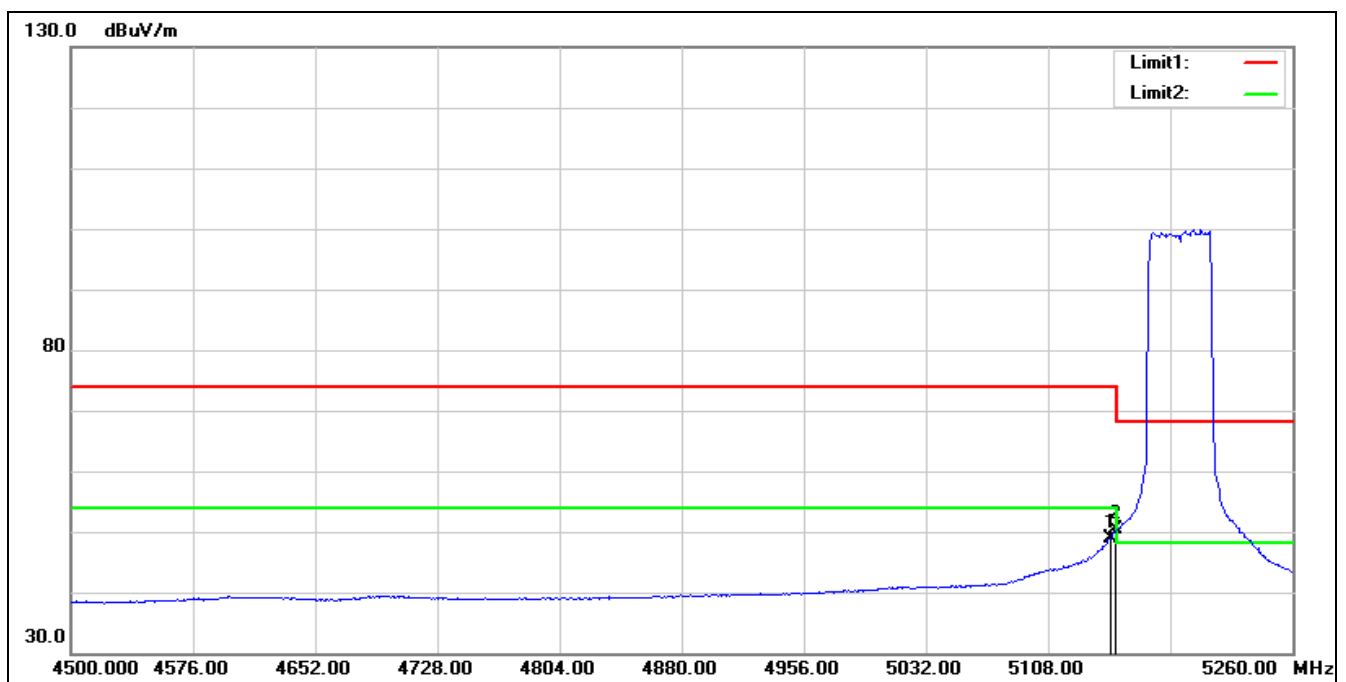

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	47.53	1.39	48.92	54.00	-5.08	AVG
2*	5150.000	49.09	1.38	50.47	54.00	-3.53	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5190 MHz
Remark:

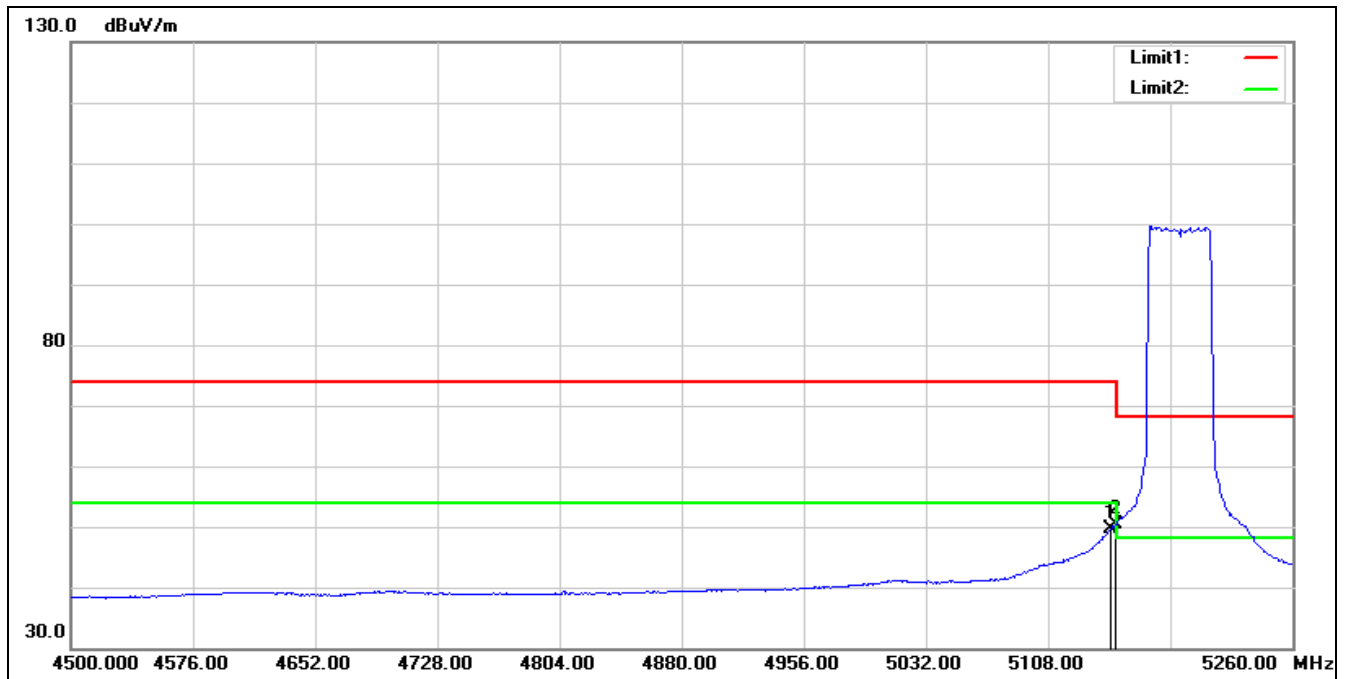


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	48.14	1.39	49.53	54.00	-4.47	AVG
2*	5150.000	49.11	1.38	50.49	54.00	-3.51	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5230 MHz

Remark:

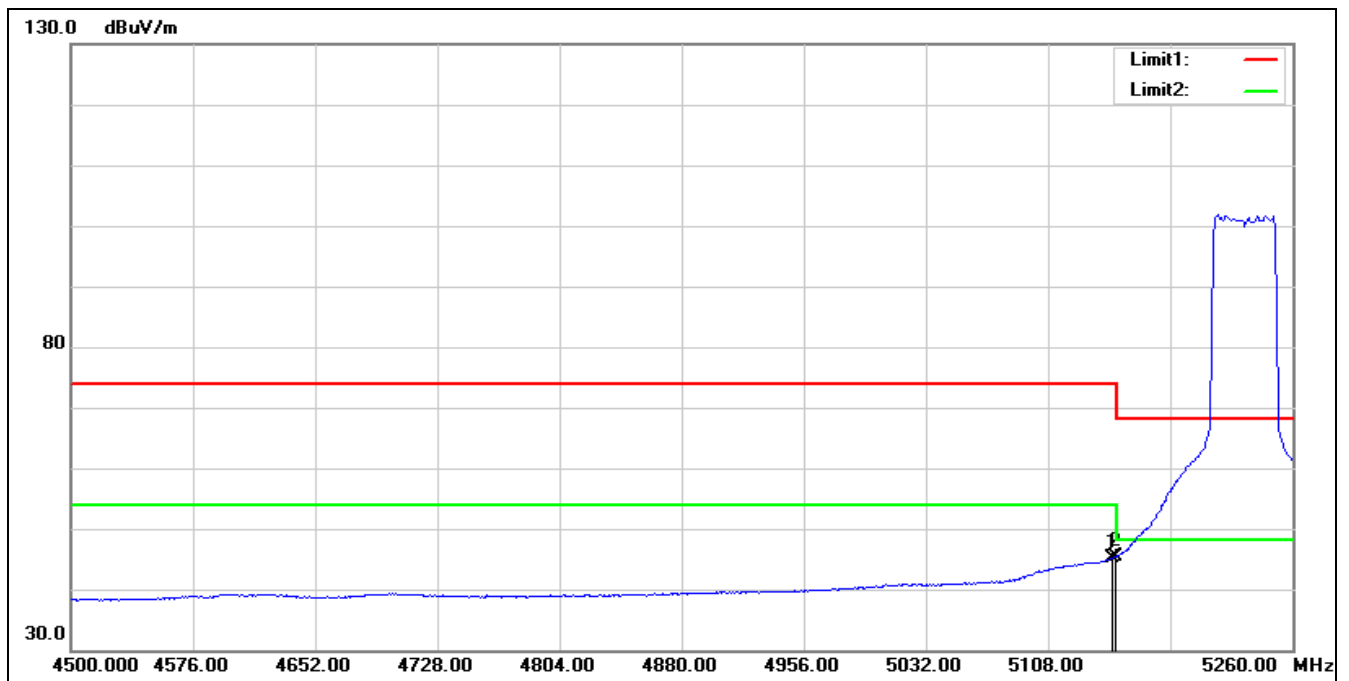


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	43.85	1.38	45.23	54.00	-8.77	AVG
2*	5150.000	44.11	1.38	45.49	54.00	-8.51	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5230 MHz
Remark:

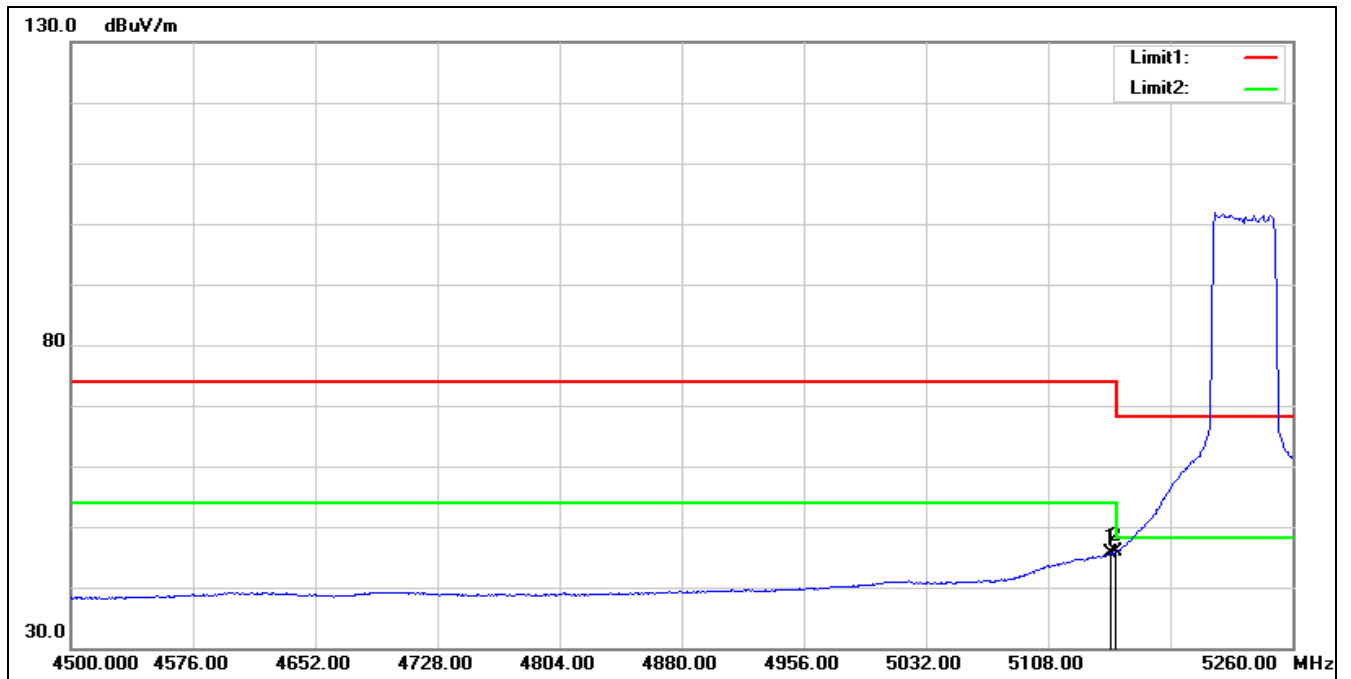

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.760	44.14	1.39	45.53	54.00	-8.47	AVG
2*	5150.000	44.47	1.38	45.85	54.00	-8.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5270 MHz		
Remark:			

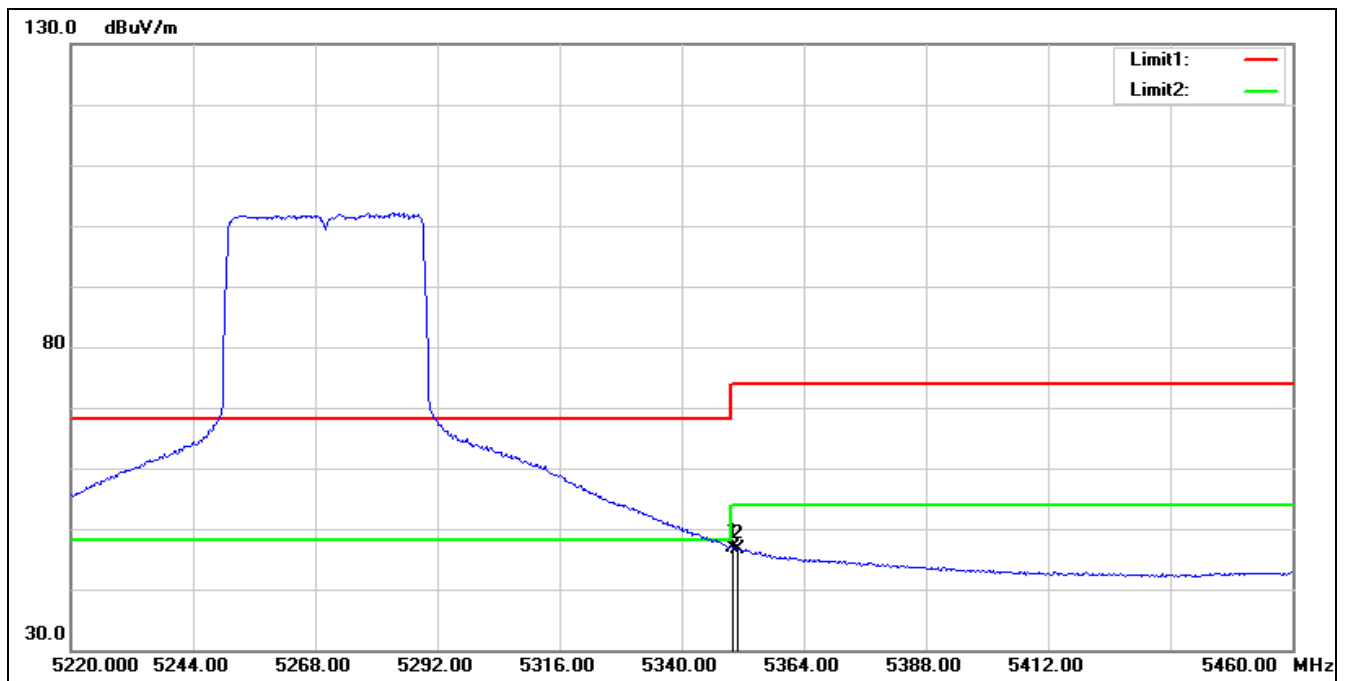


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	45.77	1.02	46.79	54.00	-7.21	AVG
2	5351.040	45.67	1.03	46.70	54.00	-7.30	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5270 MHz

Remark:

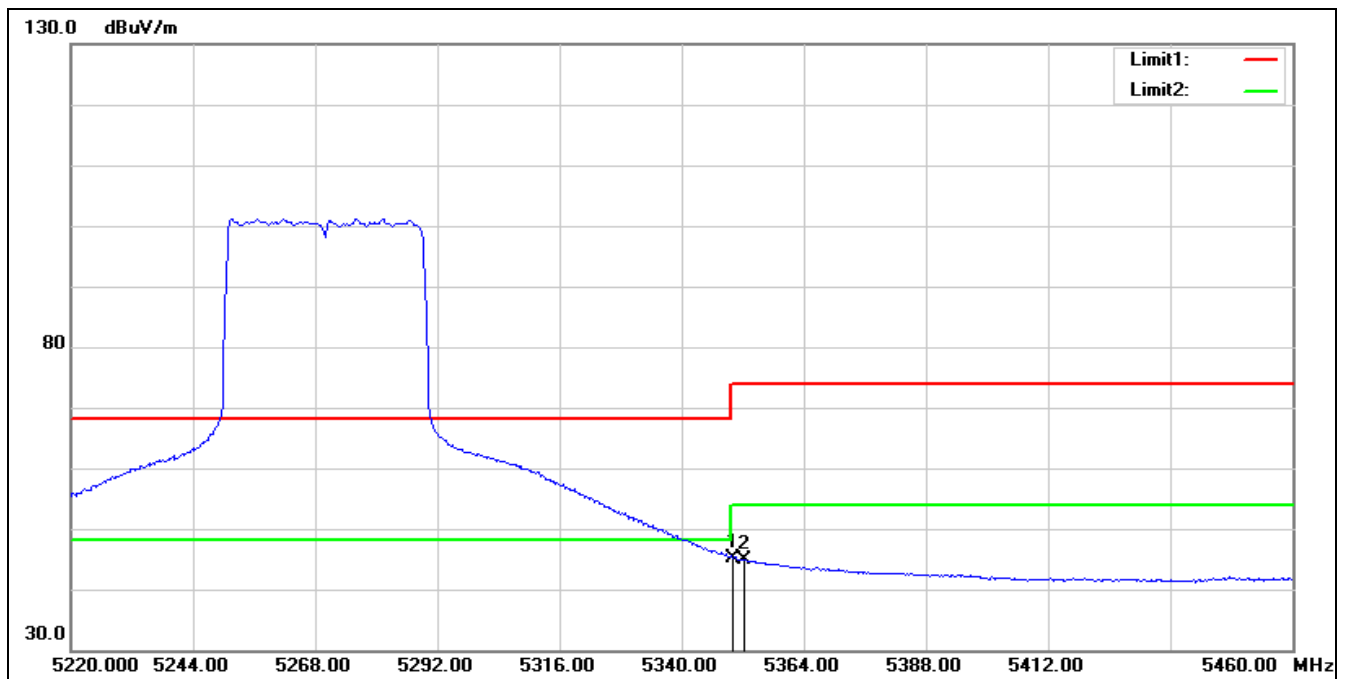

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	44.13	1.02	45.15	54.00	-8.85	AVG
2	5352.240	43.97	1.03	45.00	54.00	-9.00	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5310 MHz
Remark:

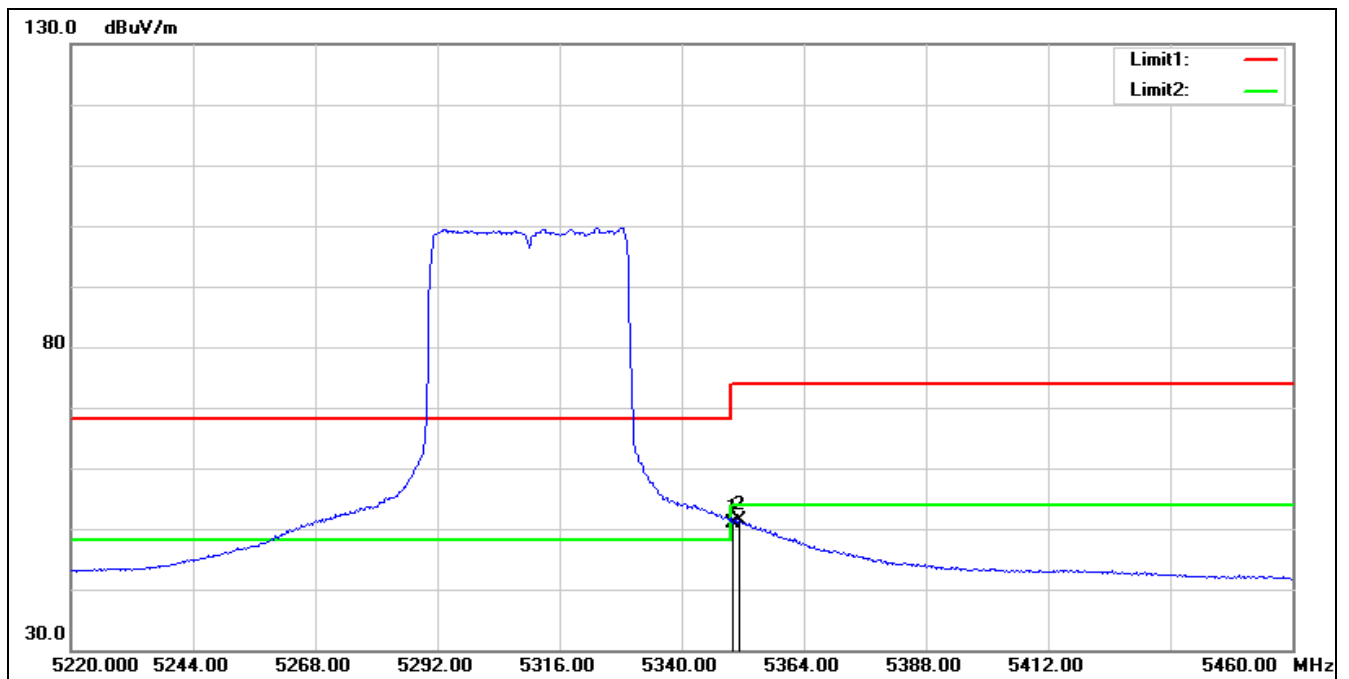


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.98	1.02	51.00	54.00	-3.00	AVG
2*	5351.280	50.29	1.03	51.32	54.00	-2.68	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5310 MHz

Remark:

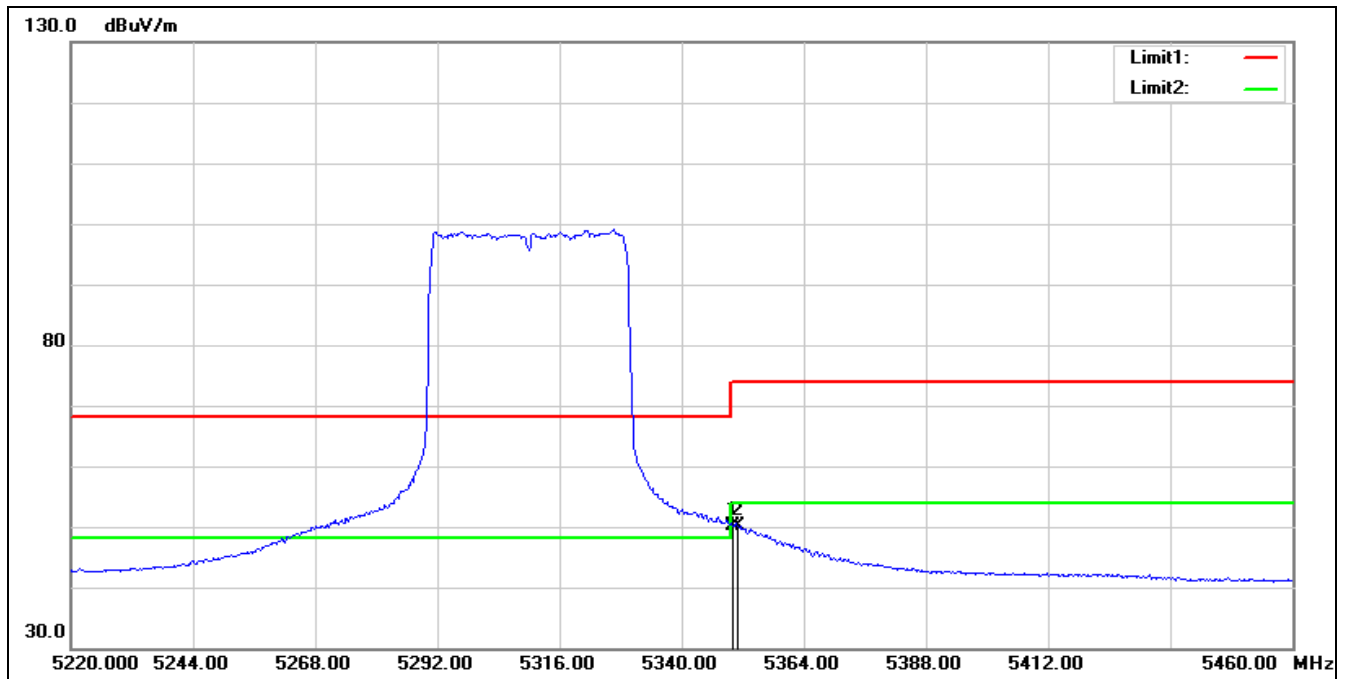


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5350.000	49.21	1.02	50.23	54.00	-3.77	AVG
2	5351.040	49.11	1.03	50.14	54.00	-3.86	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5510 MHz		
Remark:			

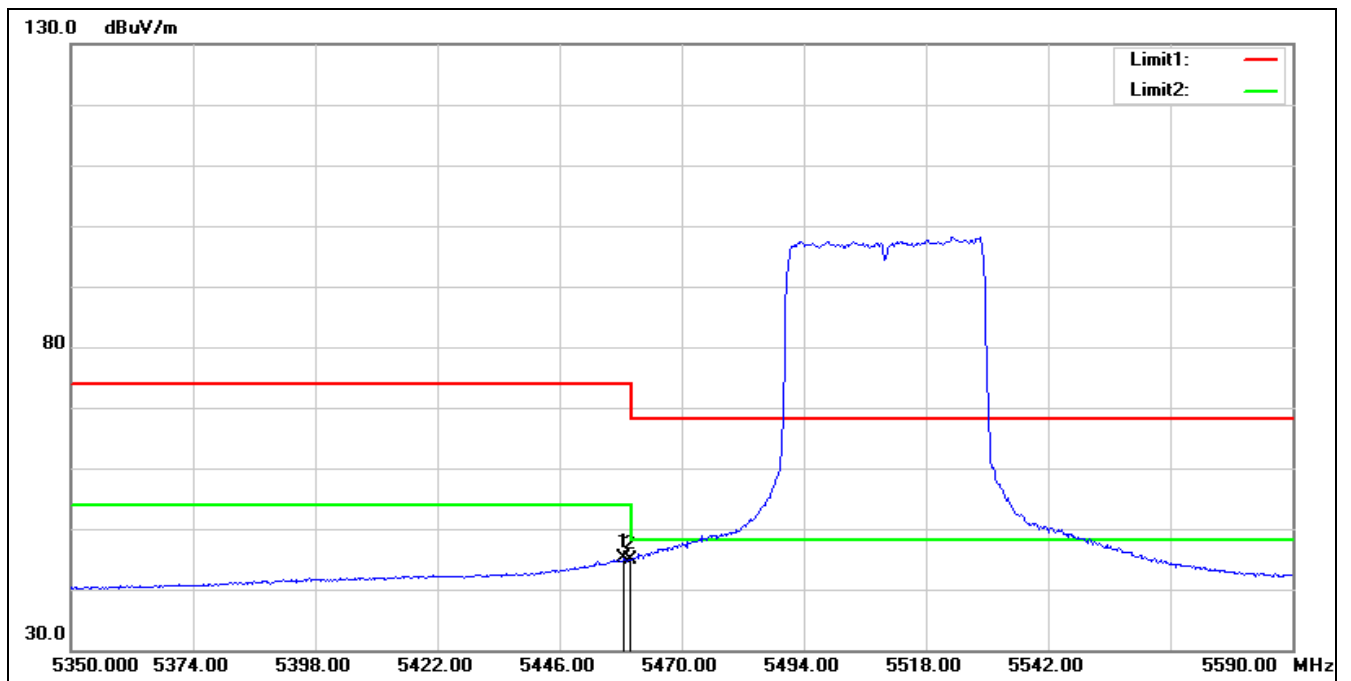


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.720	43.26	1.75	45.01	54.00	-8.99	AVG
2	5460.000	43.24	1.75	44.99	54.00	-9.01	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5510 MHz		
Remark:			

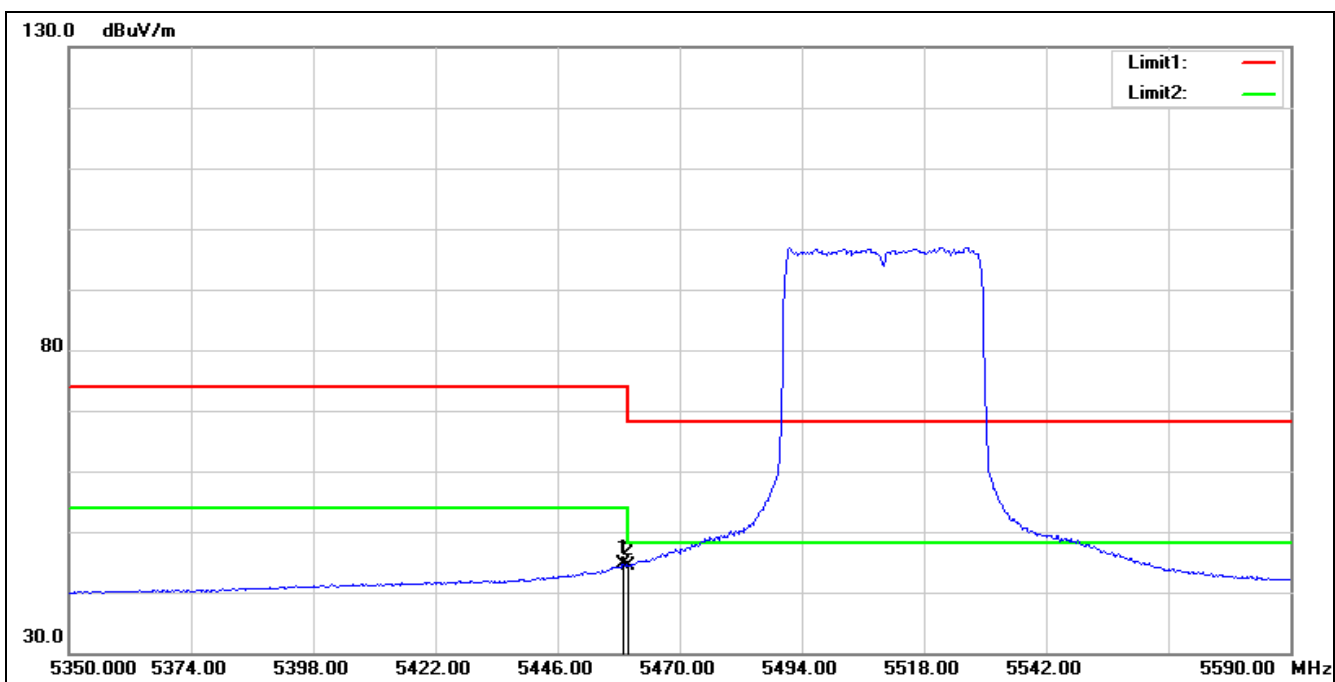


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.960	42.84	1.75	44.59	54.00	-9.41	AVG
2	5460.000	42.72	1.75	44.47	54.00	-9.53	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5550 MHz
Remark:

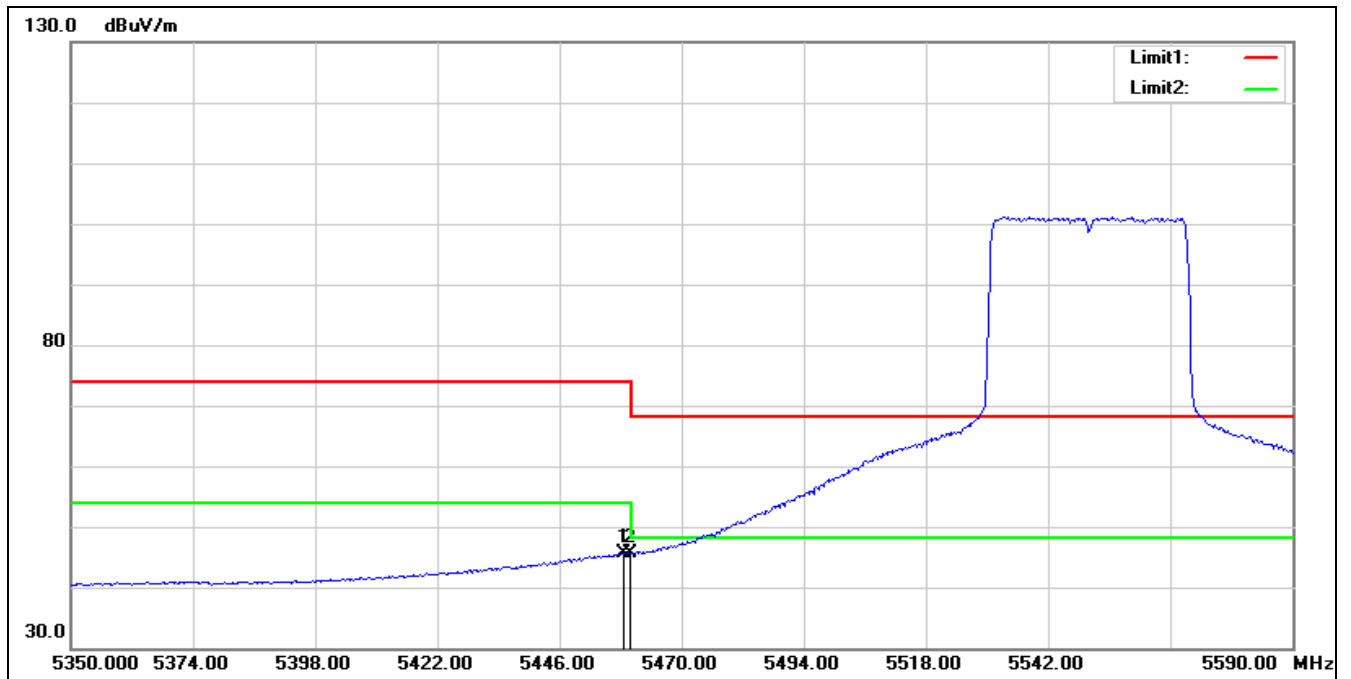


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.480	43.84	1.75	45.59	54.00	-8.41	AVG
2	5460.000	43.80	1.75	45.55	54.00	-8.45	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5550 MHz
Remark:

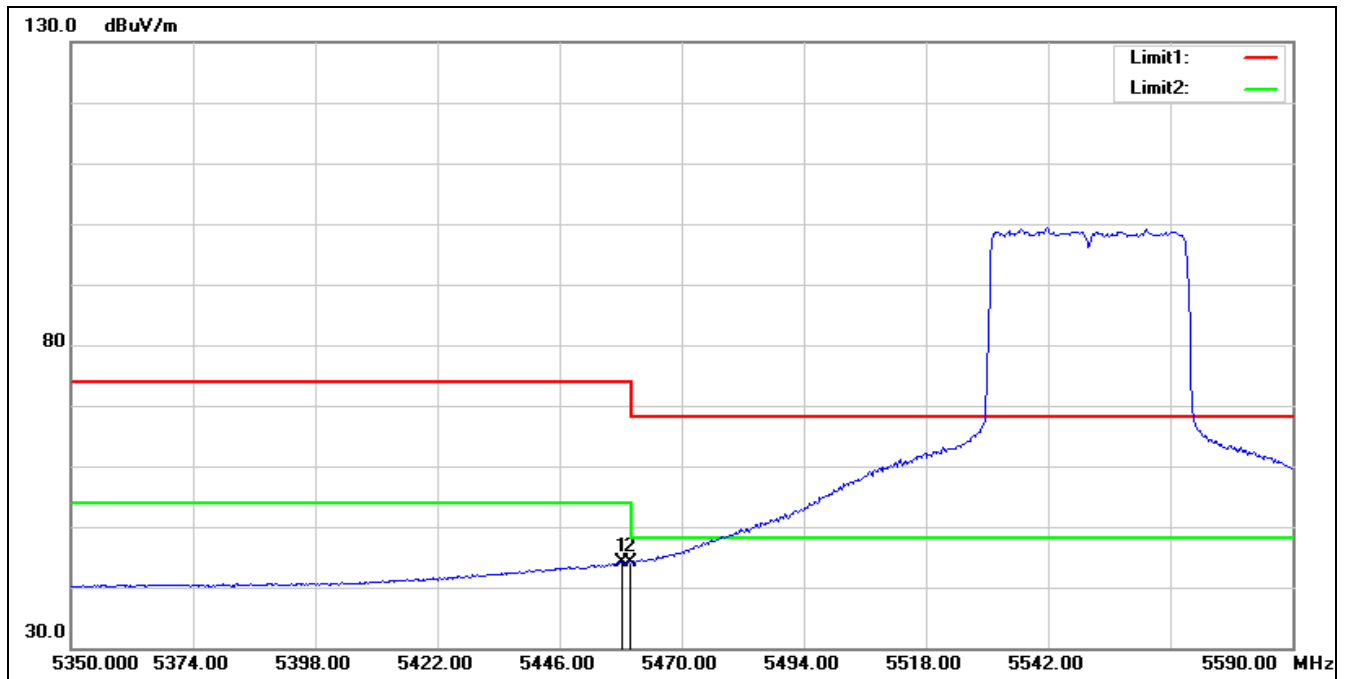


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.240	42.40	1.75	44.15	54.00	-9.85	AVG
2	5460.000	42.38	1.75	44.13	54.00	-9.87	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5710 MHz
Remark:

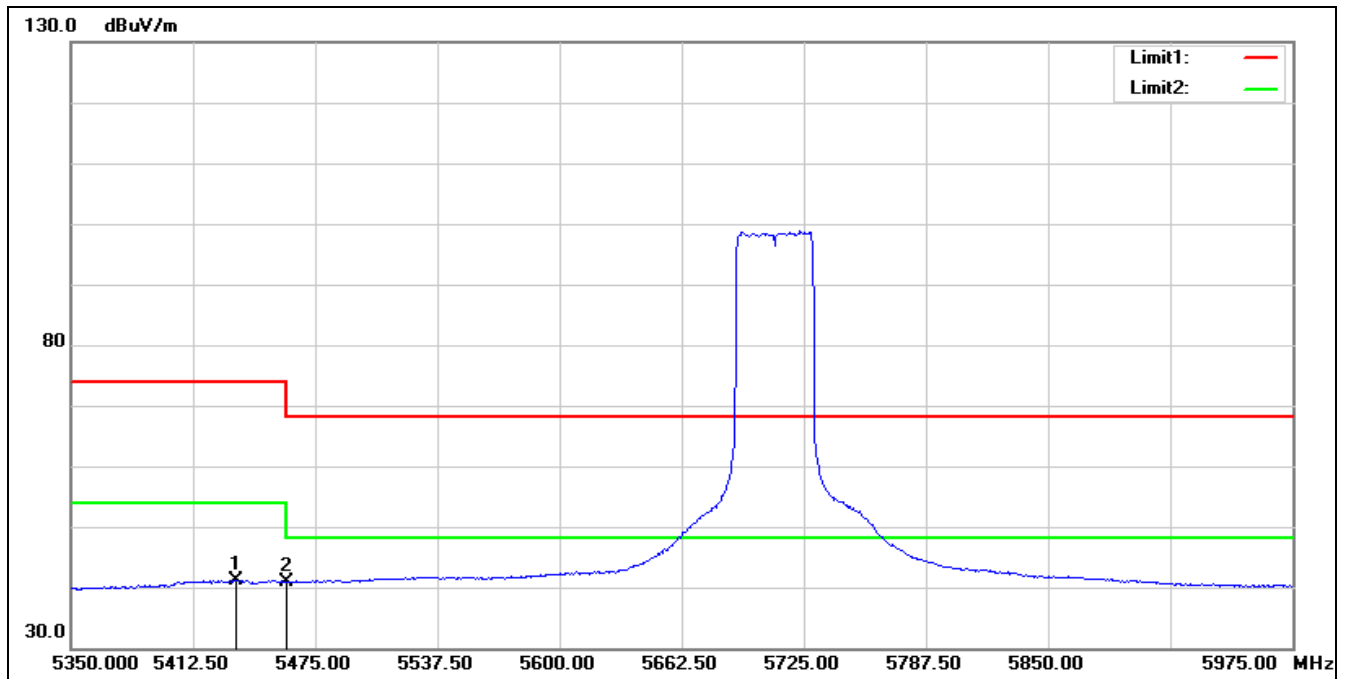


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5434.375	39.57	1.63	41.20	54.00	-12.80	AVG
2	5460.000	39.12	1.75	40.87	54.00	-13.13	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

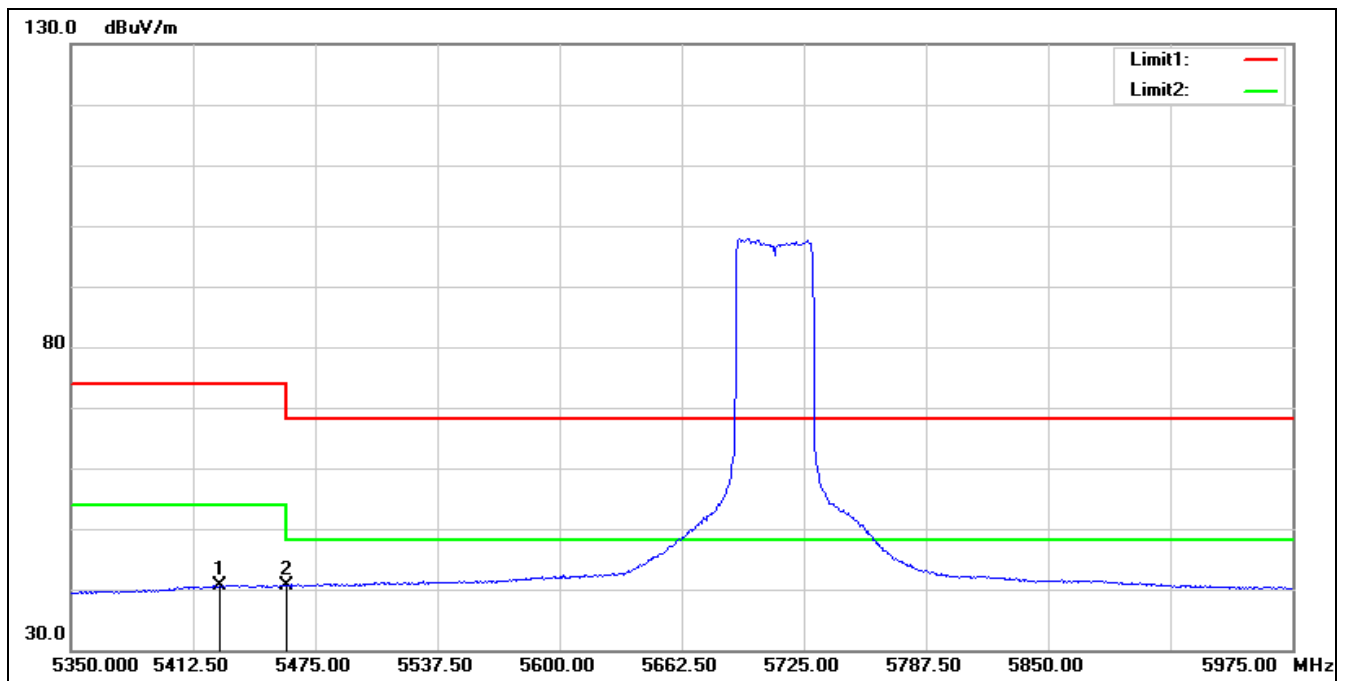


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5426.250	39.17	1.57	40.74	54.00	-13.26	AVG
2	5460.000	38.90	1.75	40.65	54.00	-13.35	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

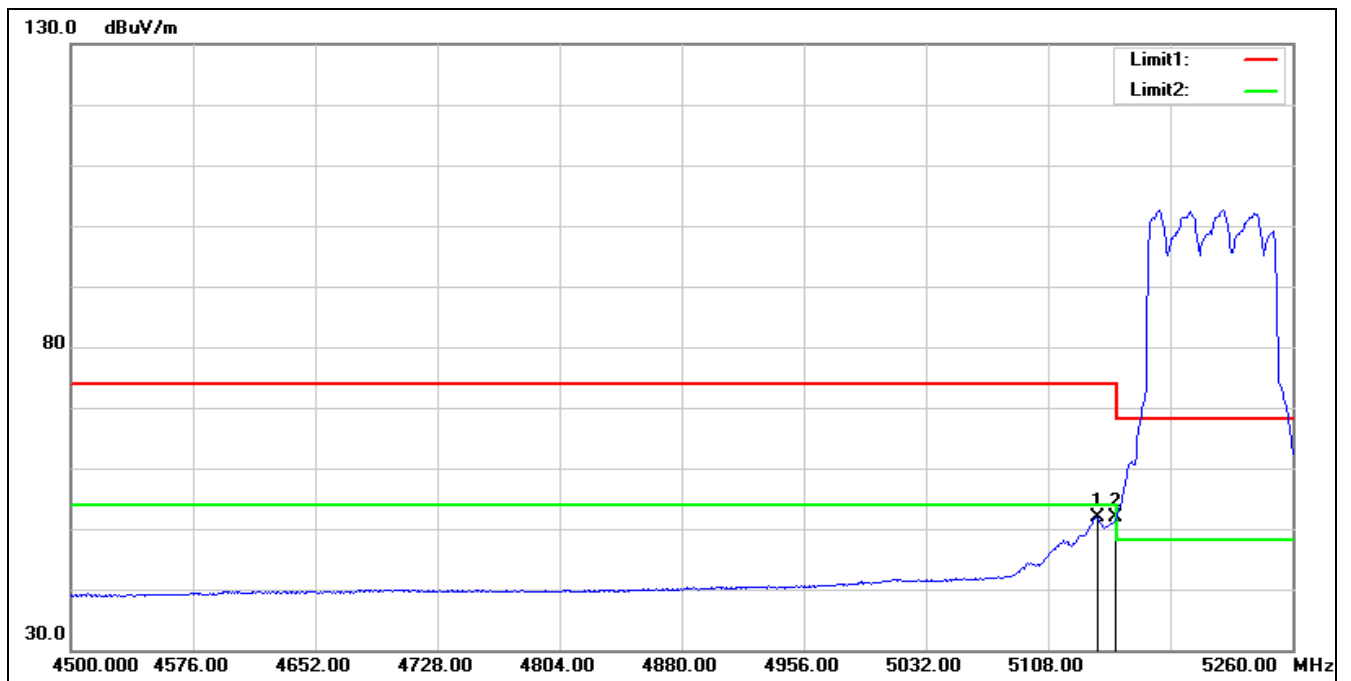

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.400	50.42	1.39	51.81	54.00	-2.19	AVG
2*	5150.000	50.46	1.38	51.84	54.00	-2.16	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5210 MHz
Remark:

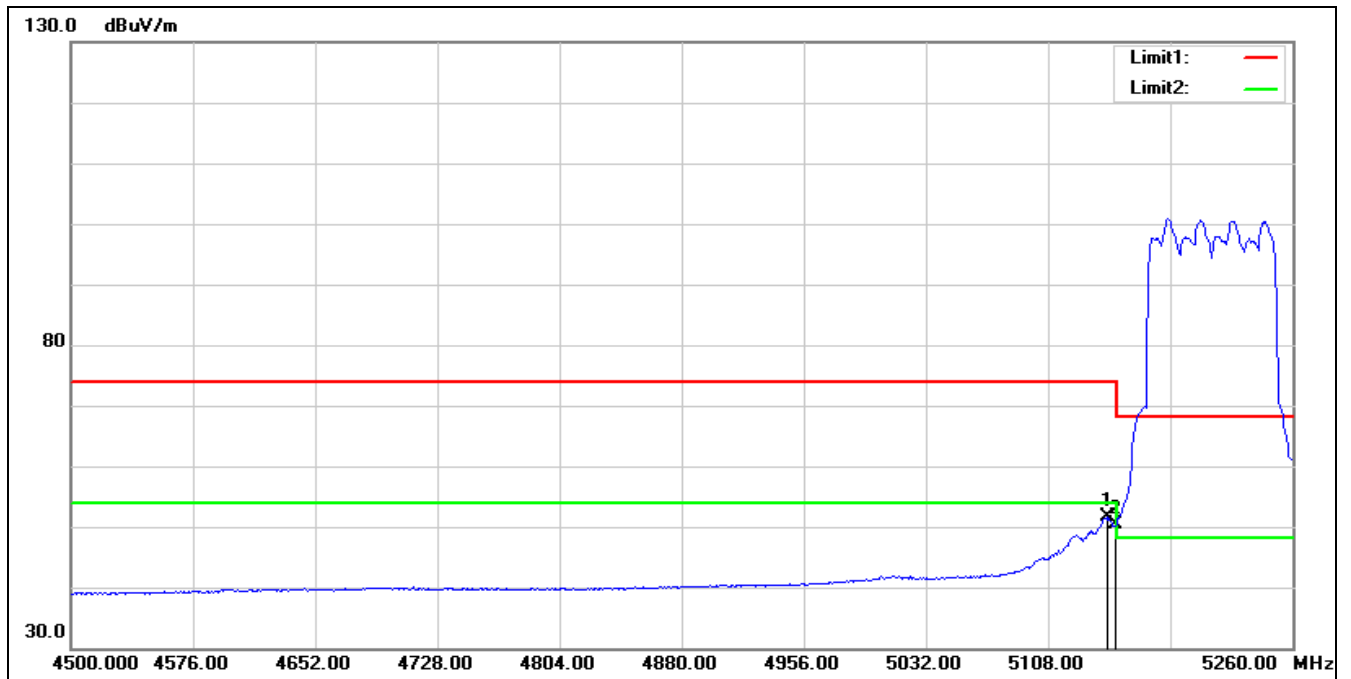


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5144.480	50.17	1.38	51.55	54.00	-2.45	AVG
2	5150.000	49.07	1.38	50.45	54.00	-3.55	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5290 MHz

Remark:

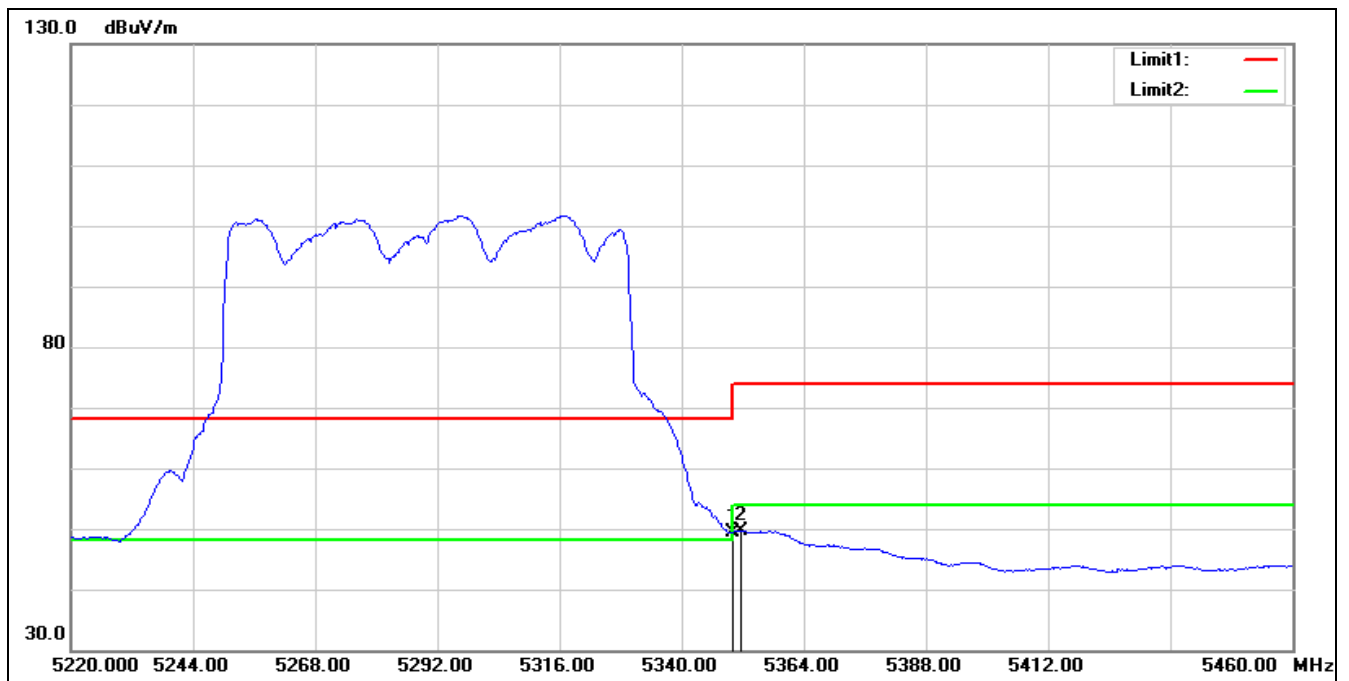


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	48.42	1.02	49.44	54.00	-4.56	AVG
2*	5351.520	48.66	1.03	49.69	54.00	-4.31	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5290 MHz
Remark:

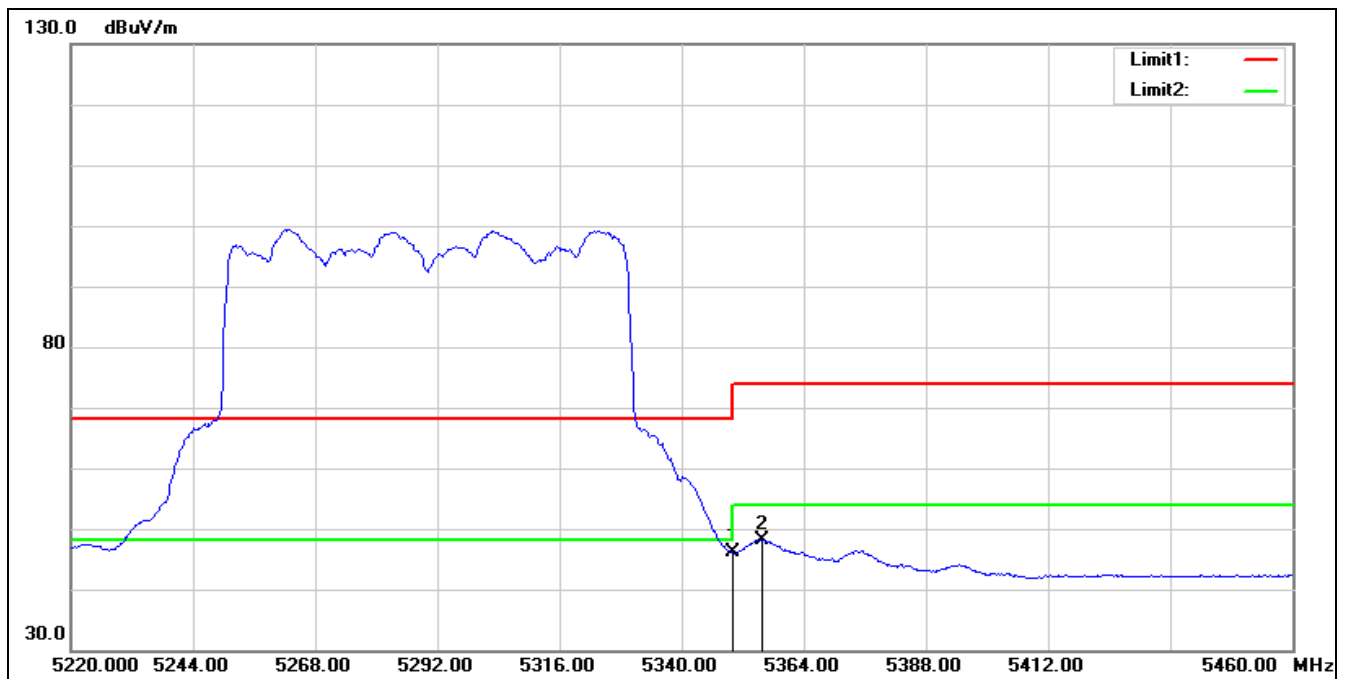


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	45.01	1.02	46.03	54.00	-7.97	AVG
2*	5355.840	47.10	1.07	48.17	54.00	-5.83	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5530 MHz		
Remark:			

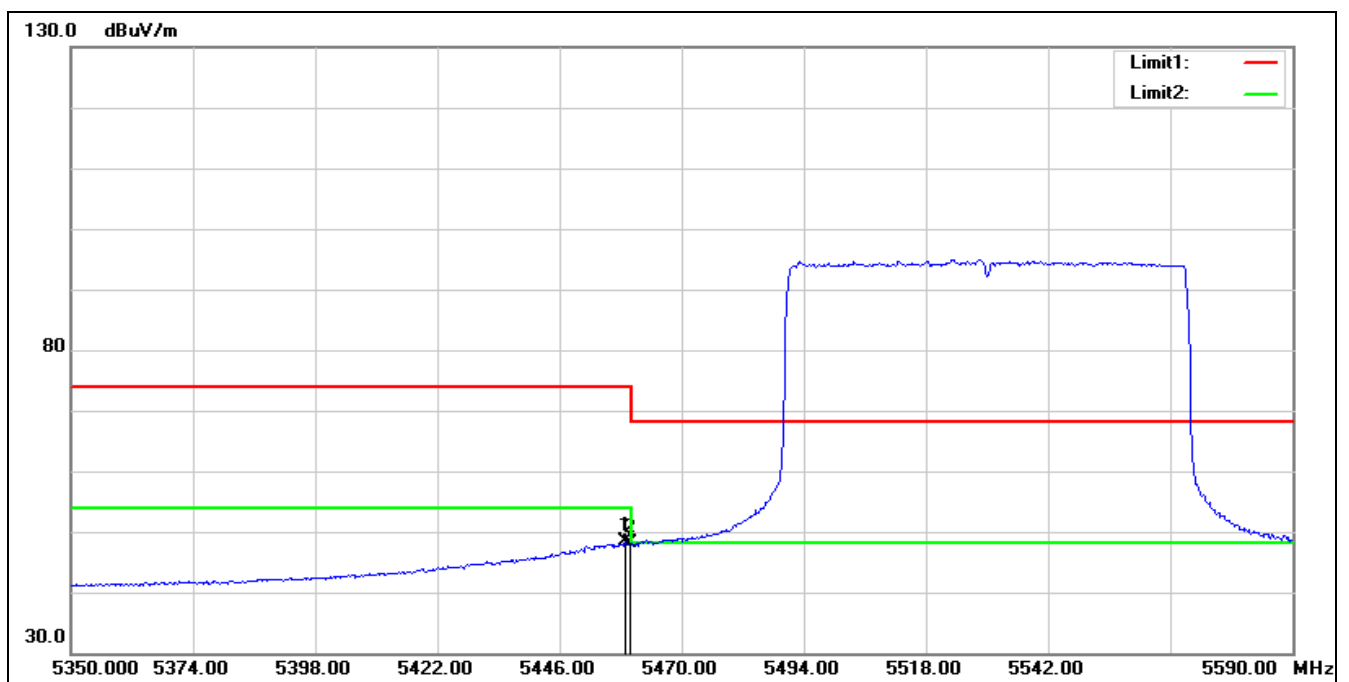


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5458.960	46.58	1.75	48.33	54.00	-5.67	AVG
2	5460.000	46.28	1.75	48.03	54.00	-5.97	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5530 MHz		
Remark:			

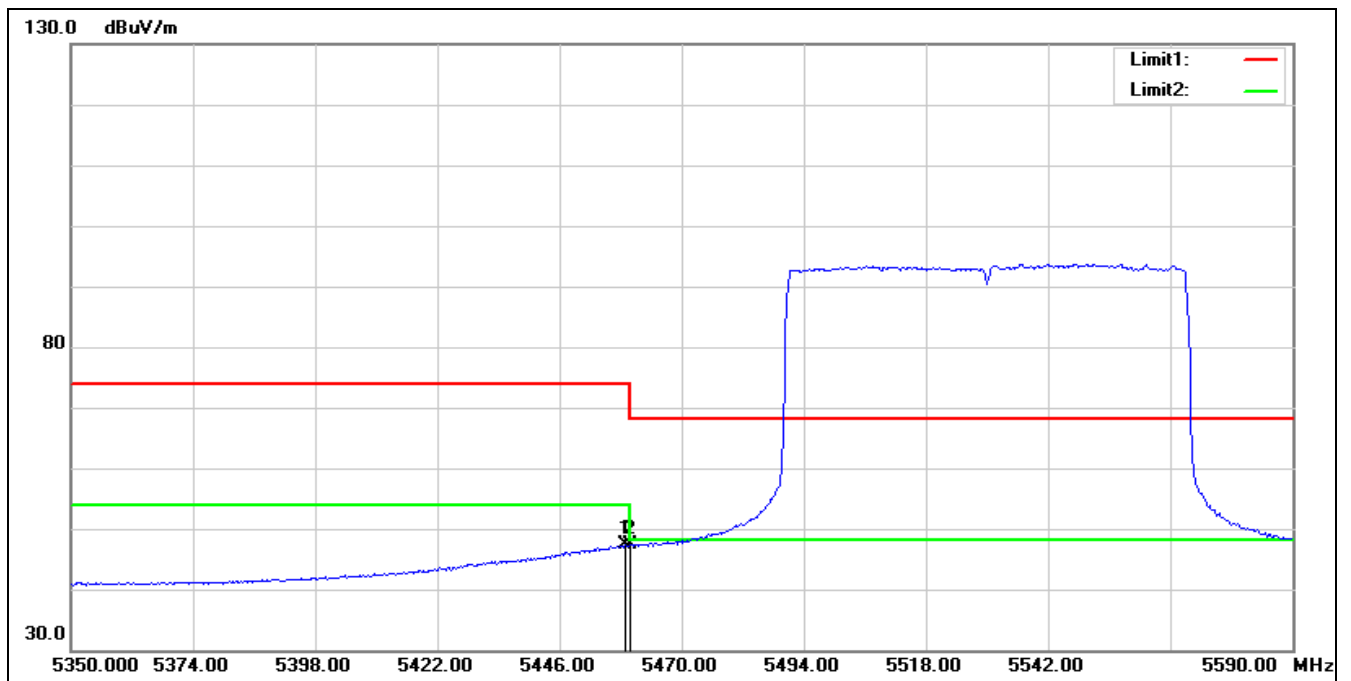


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.960	45.52	1.75	47.27	54.00	-6.73	AVG
2*	5460.000	45.58	1.75	47.33	54.00	-6.67	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

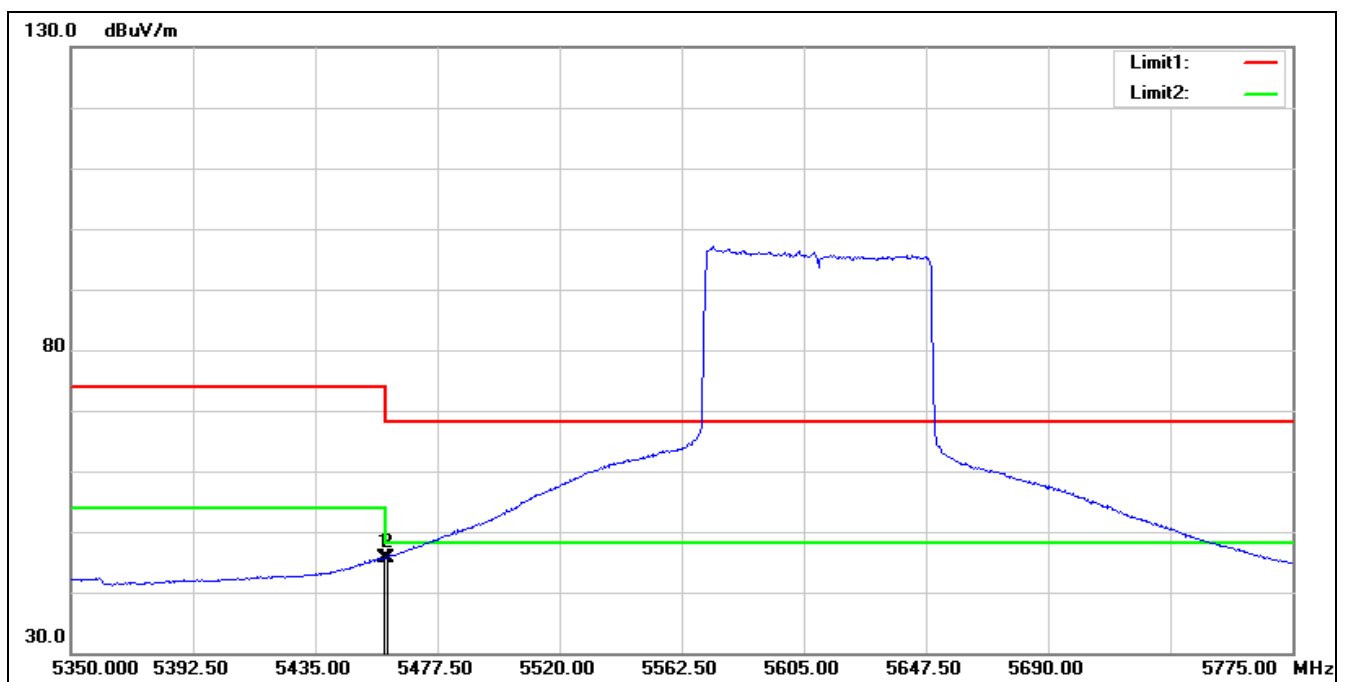

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5459.225	43.90	1.75	45.65	54.00	-8.35	AVG
2*	5460.000	44.00	1.75	45.75	54.00	-8.25	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5610 MHz		
Remark:			

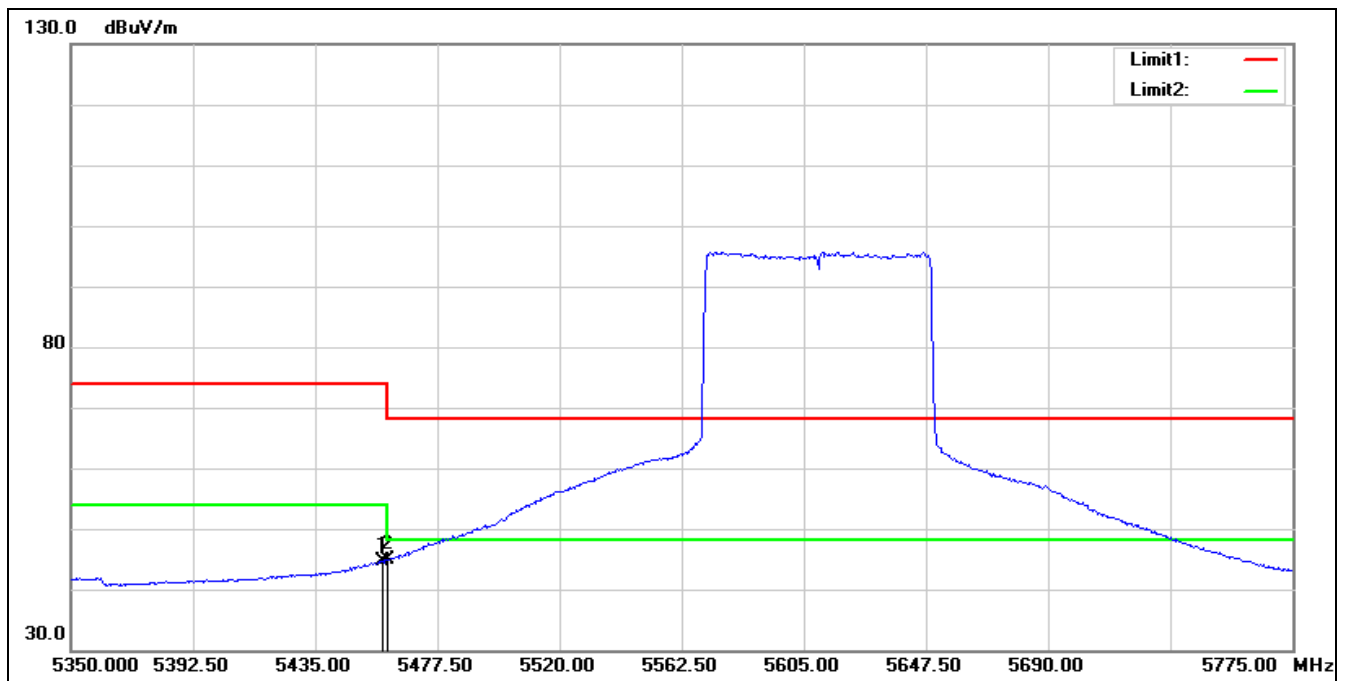


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.375	42.97	1.75	44.72	54.00	-9.28	AVG
2*	5460.000	43.12	1.75	44.87	54.00	-9.13	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5690 MHz

Remark:

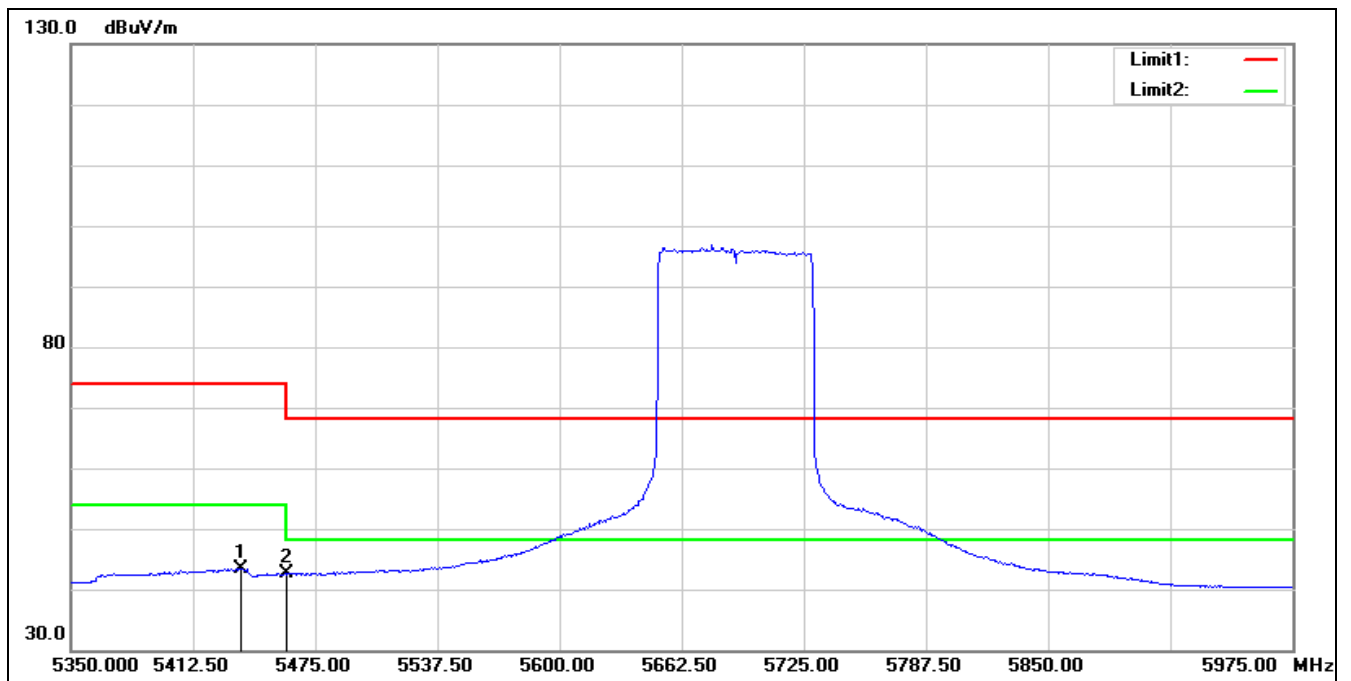


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5436.875	41.76	1.64	43.40	54.00	-10.60	AVG
2	5460.000	40.84	1.75	42.59	54.00	-11.41	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

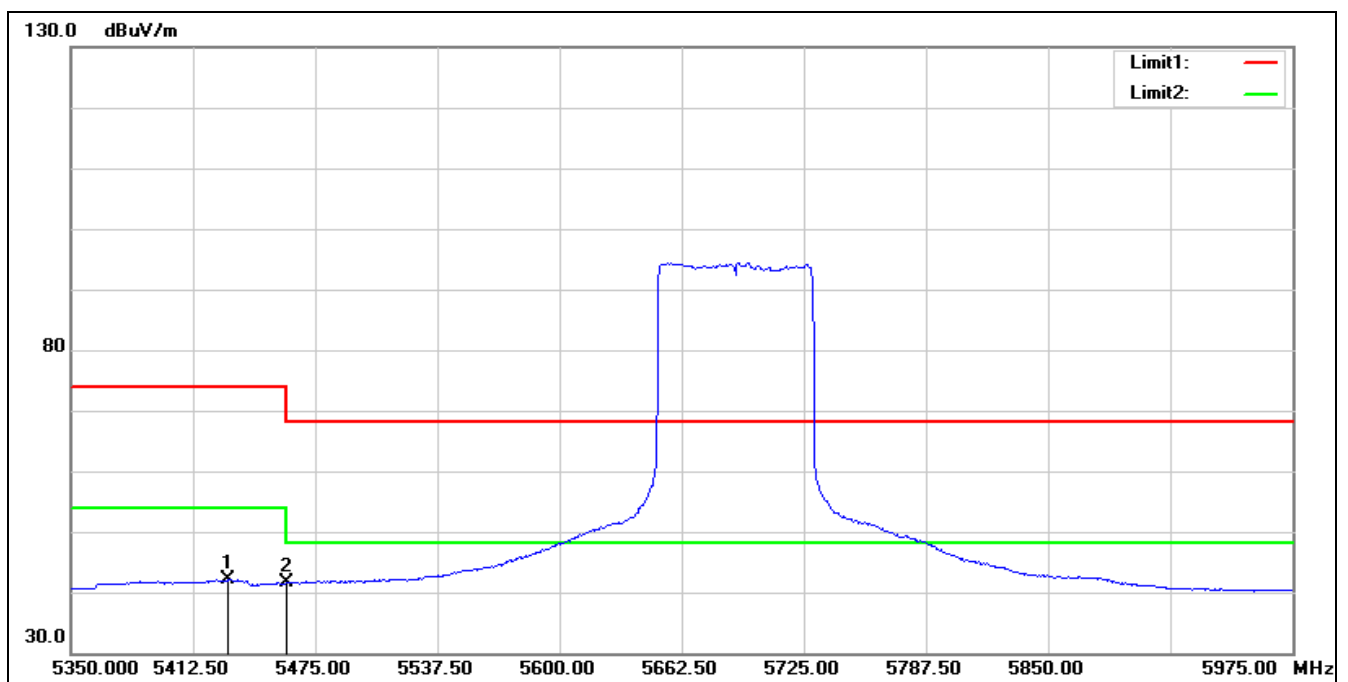


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5430.625	40.49	1.60	42.09	54.00	-11.91	AVG
2	5460.000	39.92	1.75	41.67	54.00	-12.33	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT160 5250 MHz
Remark:

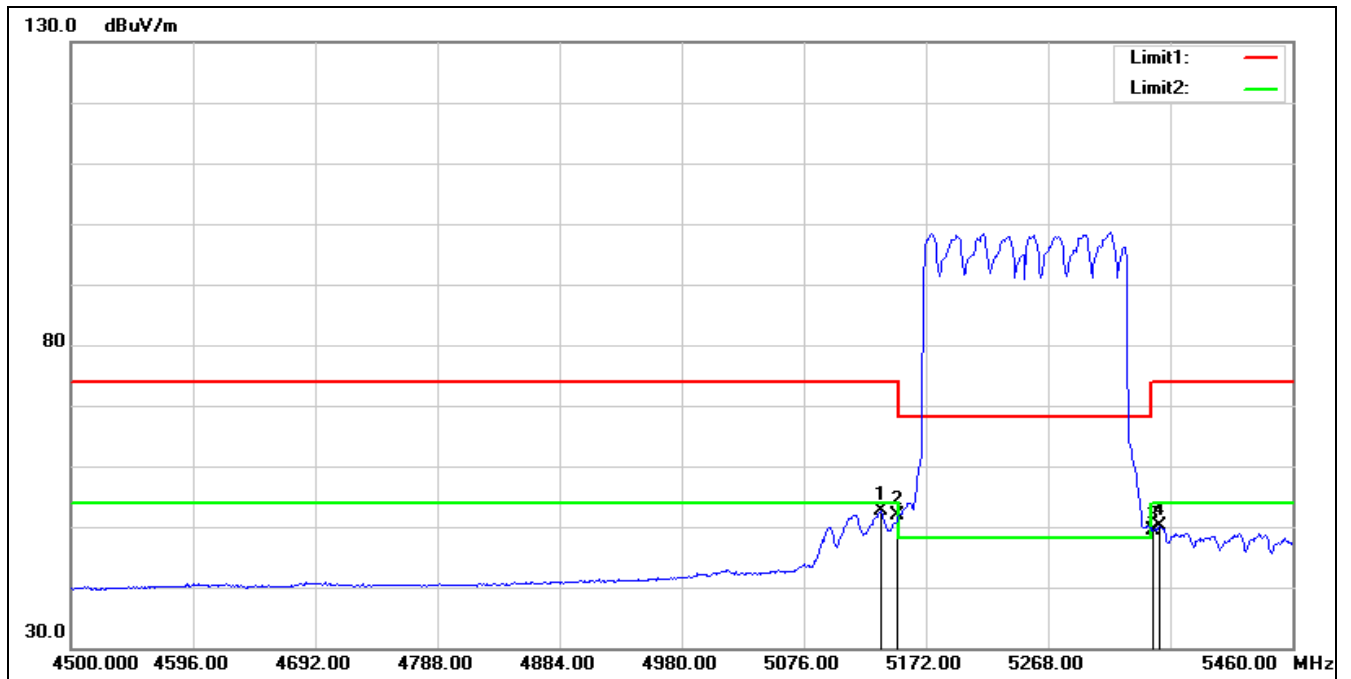

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5136.480	51.21	1.40	52.61	54.00	-1.39	AVG
2	5150.000	50.56	1.38	51.94	54.00	-2.06	AVG
3	5350.000	48.37	1.02	49.39	54.00	-4.61	AVG
4	5355.360	48.97	1.06	50.03	54.00	-3.97	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 5250 MHz		
Remark:			

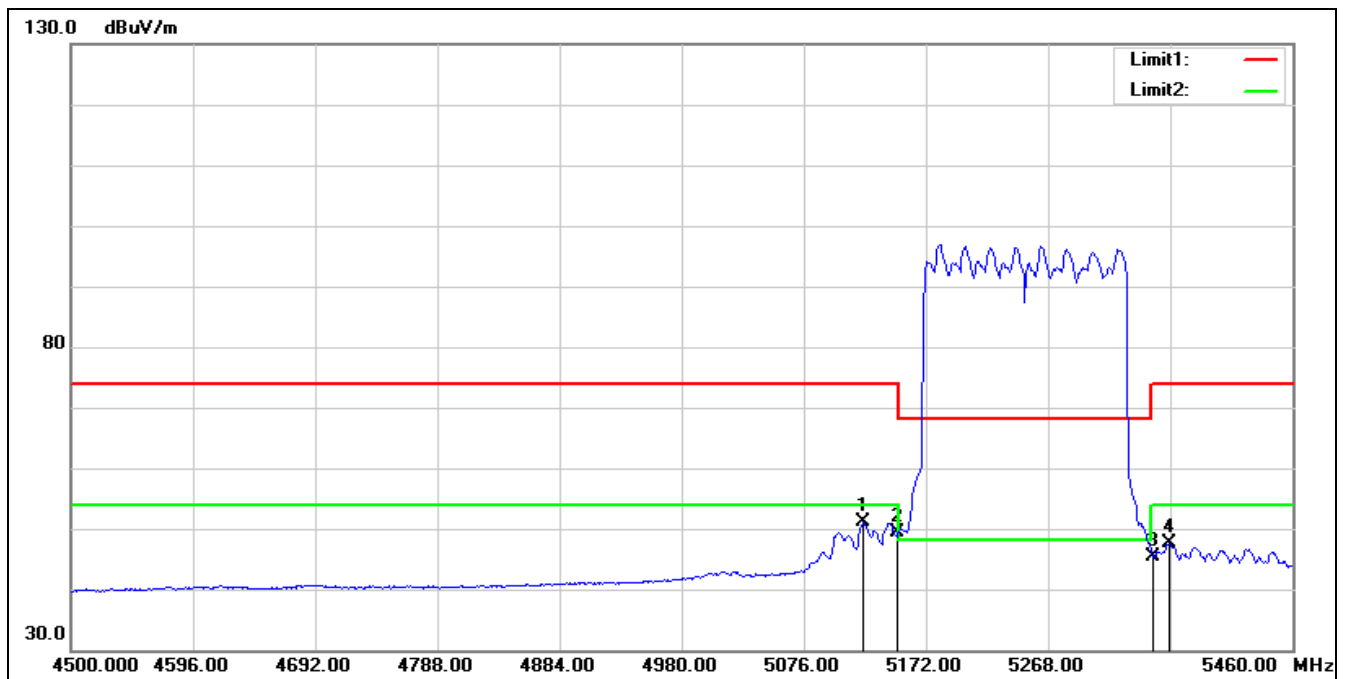


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5123.040	49.68	1.40	51.08	54.00	-2.92	AVG
2	5150.000	48.11	1.38	49.49	54.00	-4.51	AVG
3	5350.000	44.28	1.02	45.30	54.00	-8.70	AVG
4	5363.040	46.60	1.11	47.71	54.00	-6.29	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT160 5570 MHz

Remark:

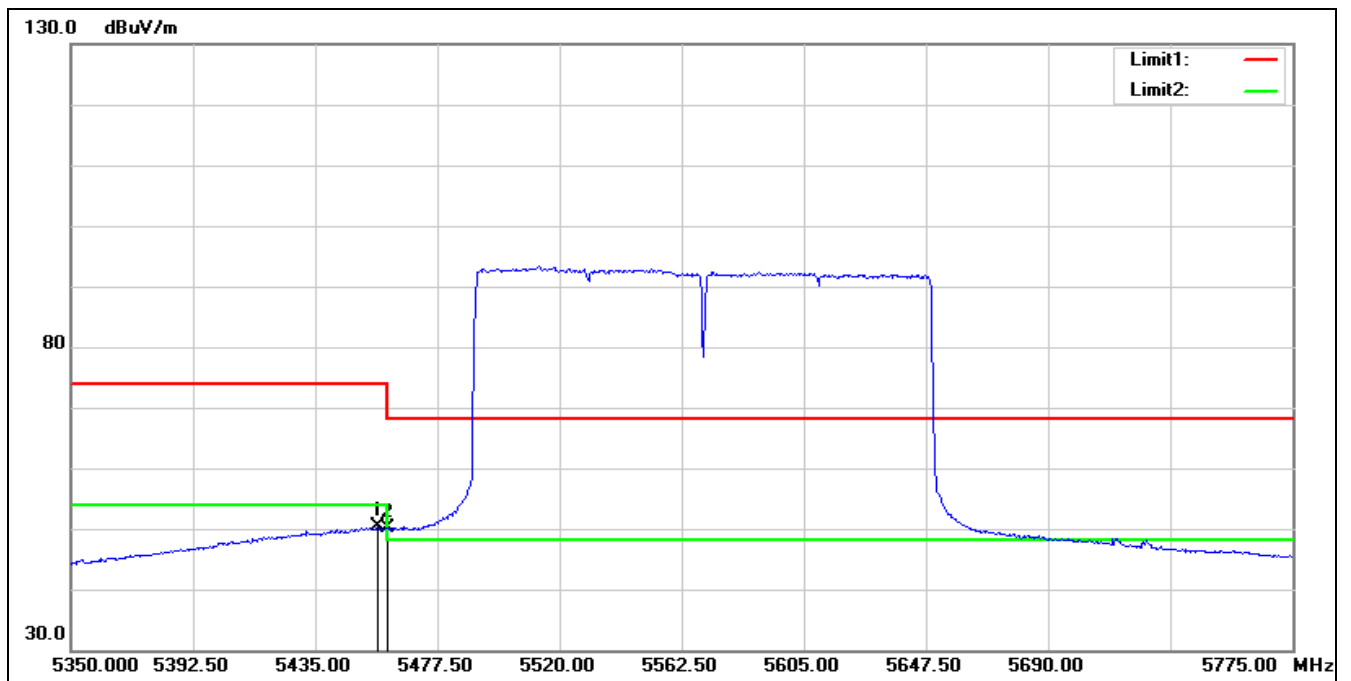


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.675	48.51	1.75	50.26	54.00	-3.74	AVG
2	5460.000	48.27	1.75	50.02	54.00	-3.98	AVG

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT160 5570 MHz

Remark:

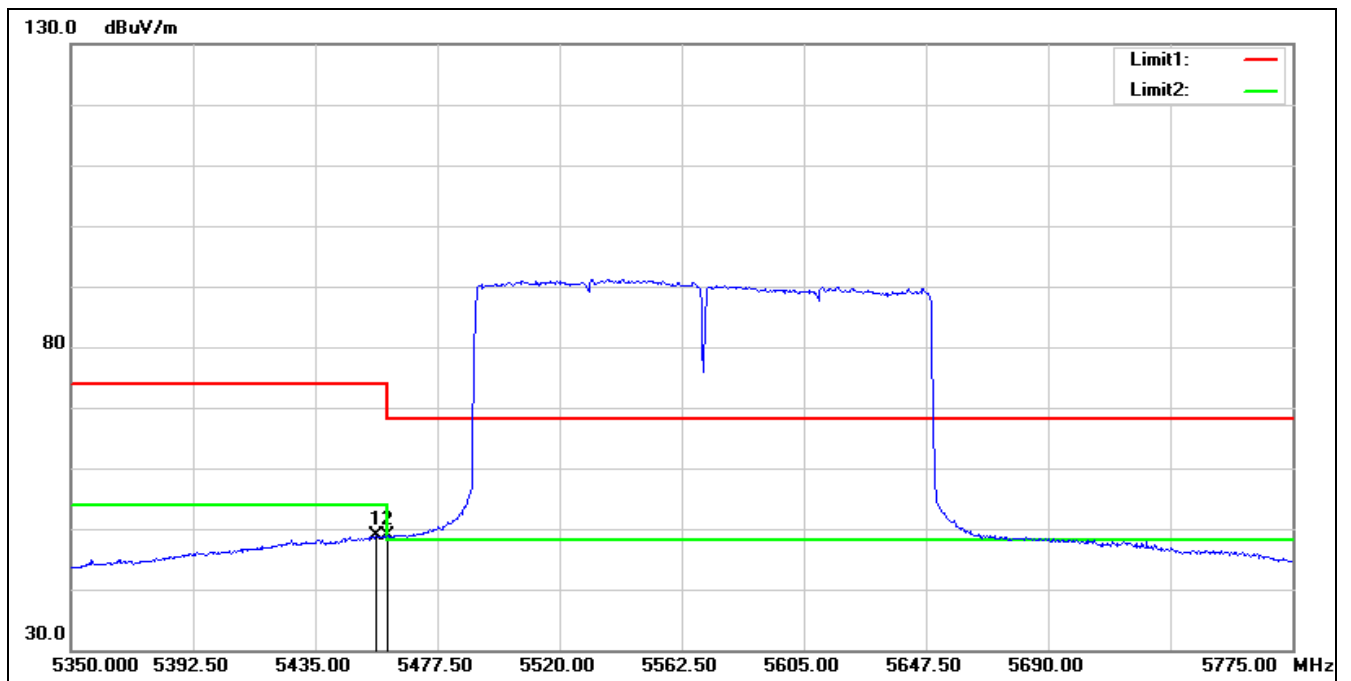


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5456.250	47.10	1.75	48.85	54.00	-5.15	AVG
2	5460.000	47.05	1.75	48.80	54.00	-5.20	AVG

Beamforming on


Below 1 GHz

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT160 5250 MHz
Remark:

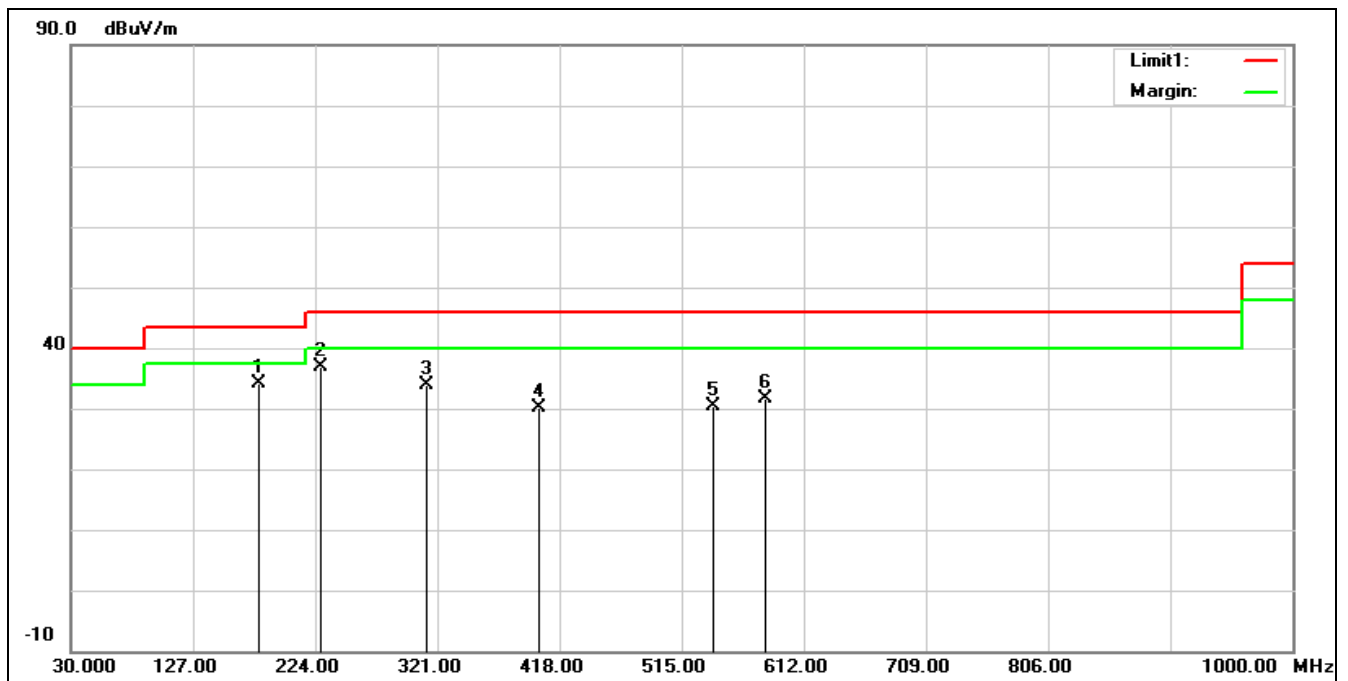

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	179.3800	41.91	-7.83	34.08	43.50	-9.42	QP
2*	227.8800	45.25	-8.44	36.81	46.00	-9.19	QP
3	312.2700	39.20	-5.25	33.95	46.00	-12.05	QP
4	401.5100	33.47	-3.44	30.03	46.00	-15.97	QP
5	540.2200	31.74	-1.28	30.46	46.00	-15.54	QP
6	581.9300	31.85	-0.25	31.60	46.00	-14.40	QP

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT160 5250 MHz
Remark:

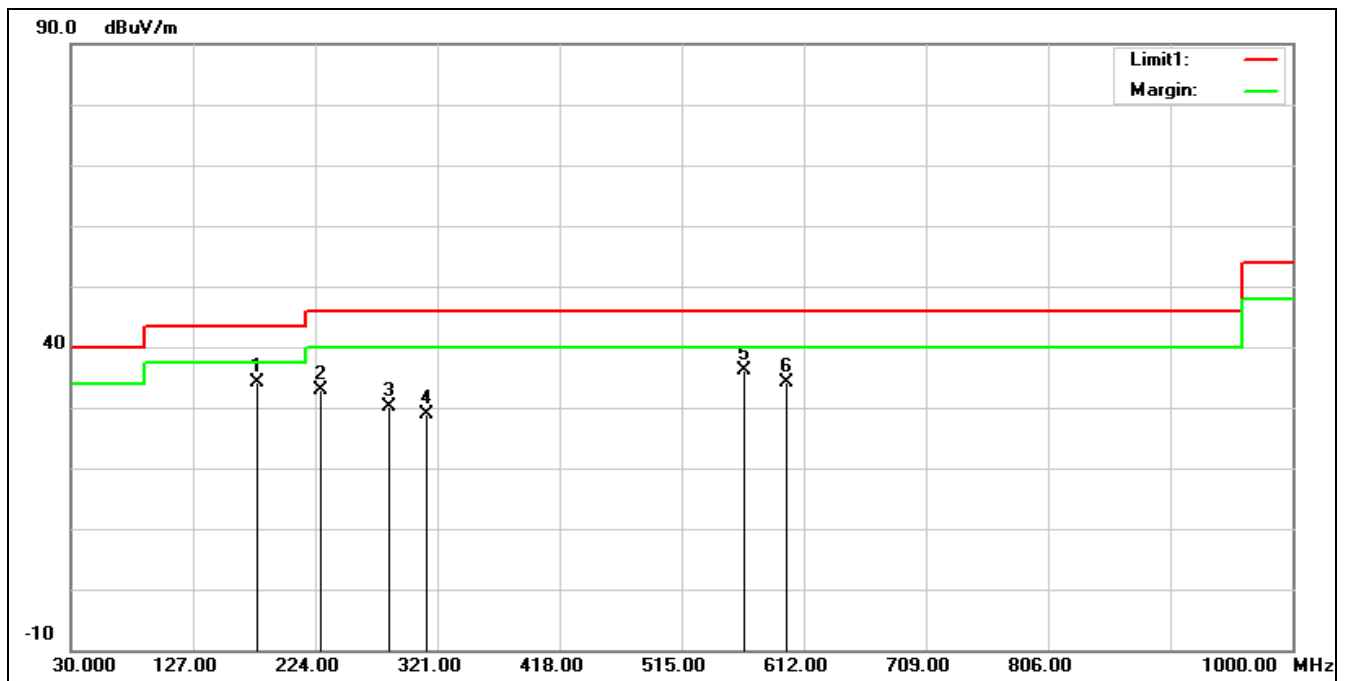


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	177.4400	41.82	-7.63	34.19	43.50	-9.31	QP
2	227.8800	41.44	-8.44	33.00	46.00	-13.00	QP
3	283.1700	36.01	-5.84	30.17	46.00	-15.83	QP
4	312.2700	34.25	-5.25	29.00	46.00	-17.00	QP
5	564.4700	36.83	-0.69	36.14	46.00	-9.86	QP
6	598.4200	34.06	0.17	34.23	46.00	-11.77	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5180 MHz		
Remark:			

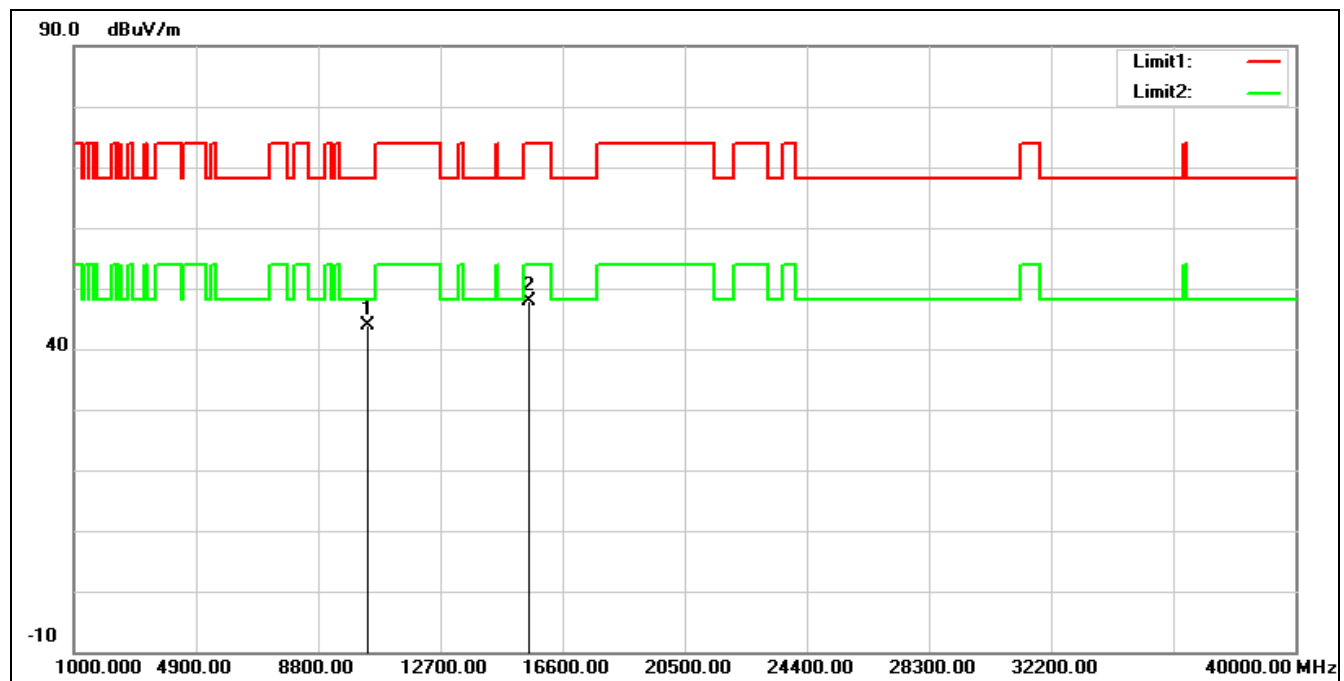


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	30.56	13.36	43.92	68.20	-24.28	peak
2	15540.000	31.06	16.77	47.83	74.00	-26.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5180 MHz		
Remark:			

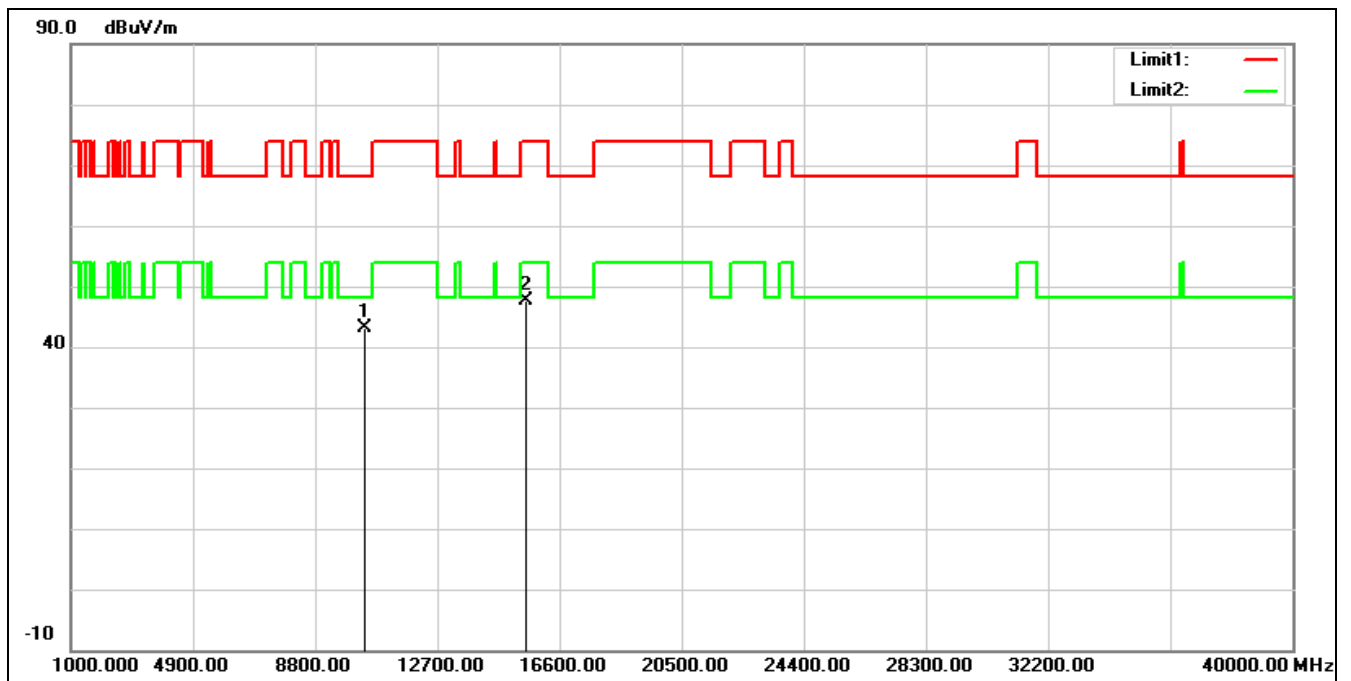


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	29.77	13.36	43.13	68.20	-25.07	peak
2	15540.000	30.79	16.77	47.56	74.00	-26.44	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5200 MHz
Remark:

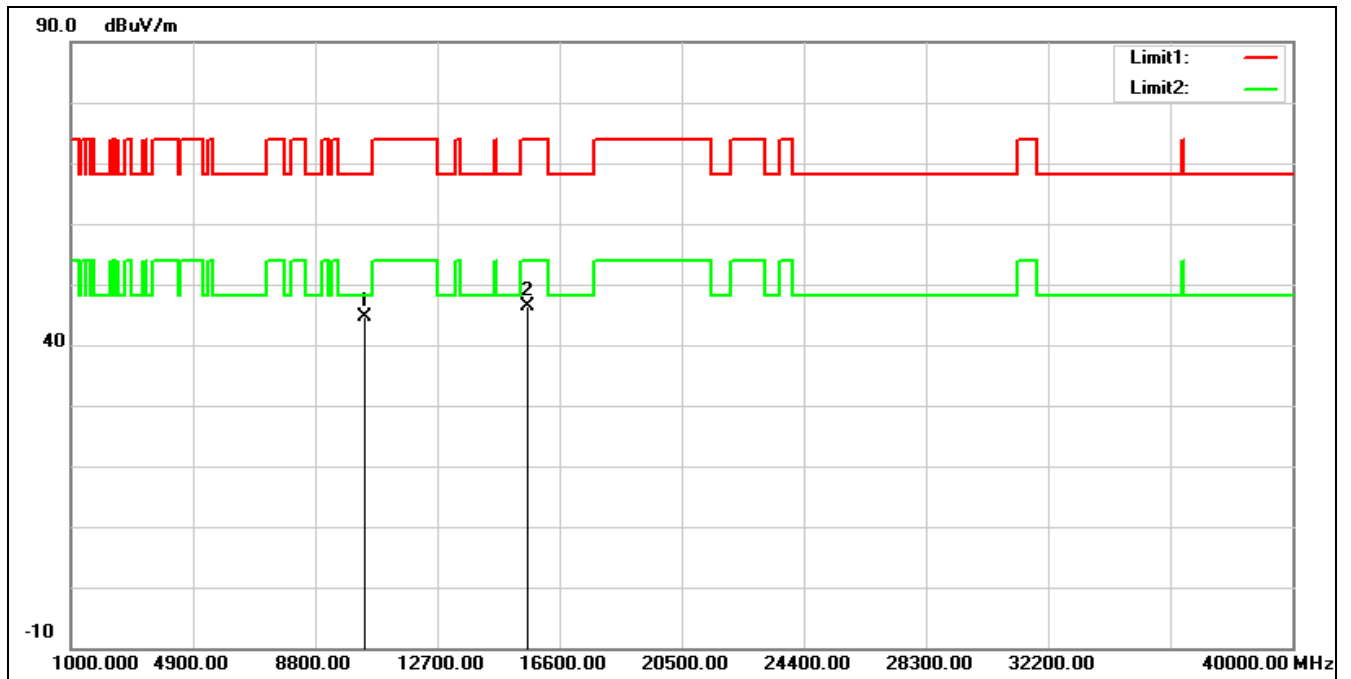

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	31.16	13.51	44.67	68.20	-23.53	peak
2	15600.000	29.77	16.66	46.43	74.00	-27.57	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5200 MHz
Remark:

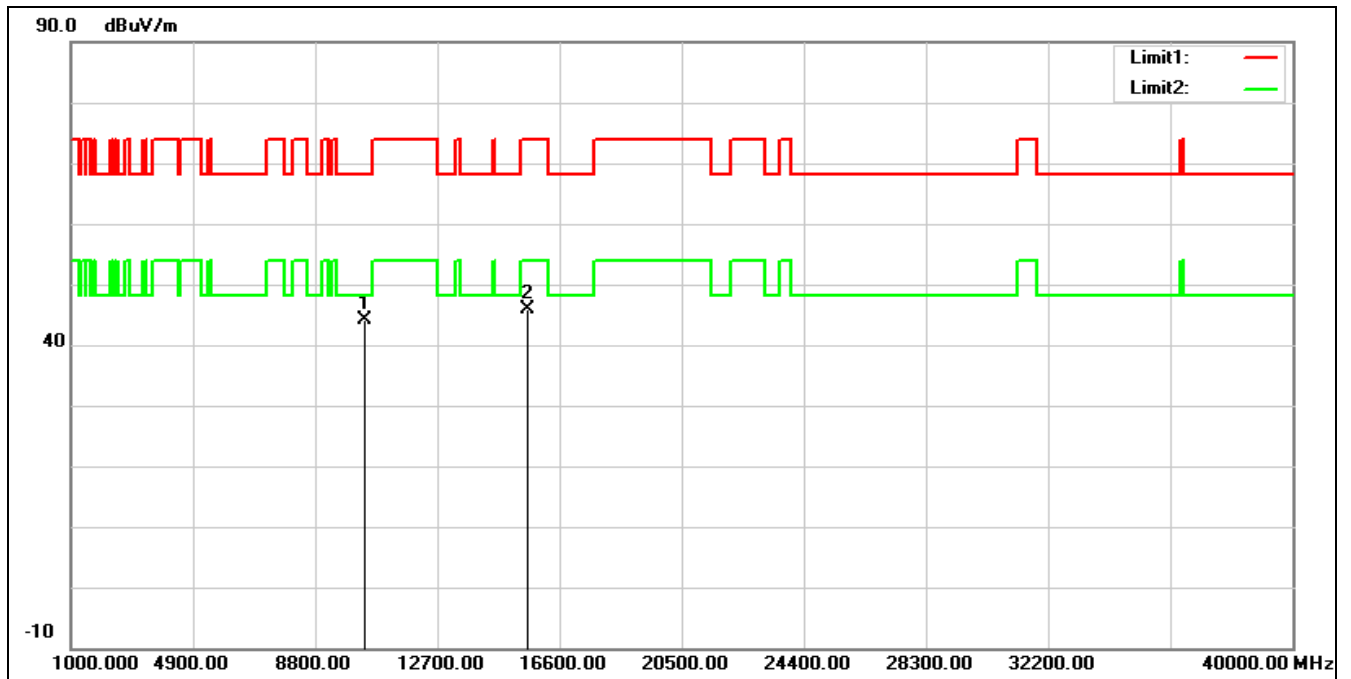


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	30.60	13.51	44.11	68.20	-24.09	peak
2	15600.000	29.27	16.66	45.93	74.00	-28.07	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5240 MHz

Remark:

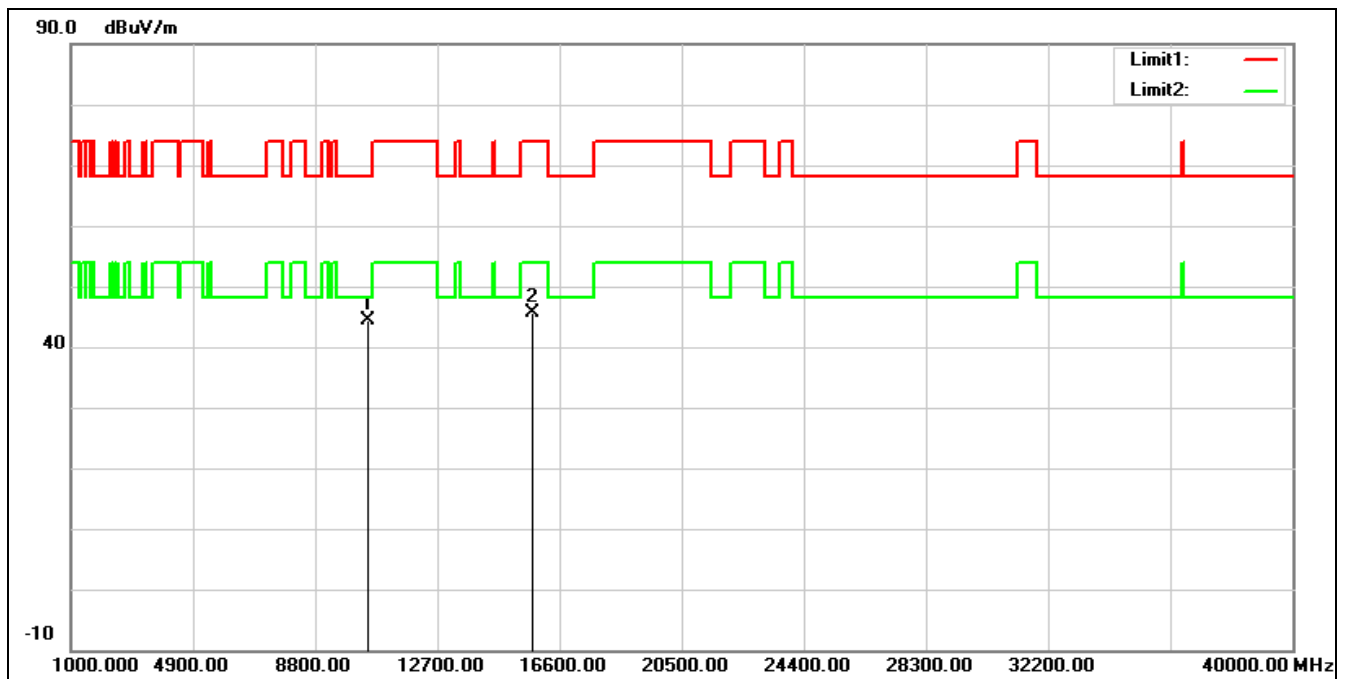


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	30.87	13.58	44.45	68.20	-23.75	peak
2	15720.000	29.05	16.57	45.62	74.00	-28.38	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5240 MHz

Remark:

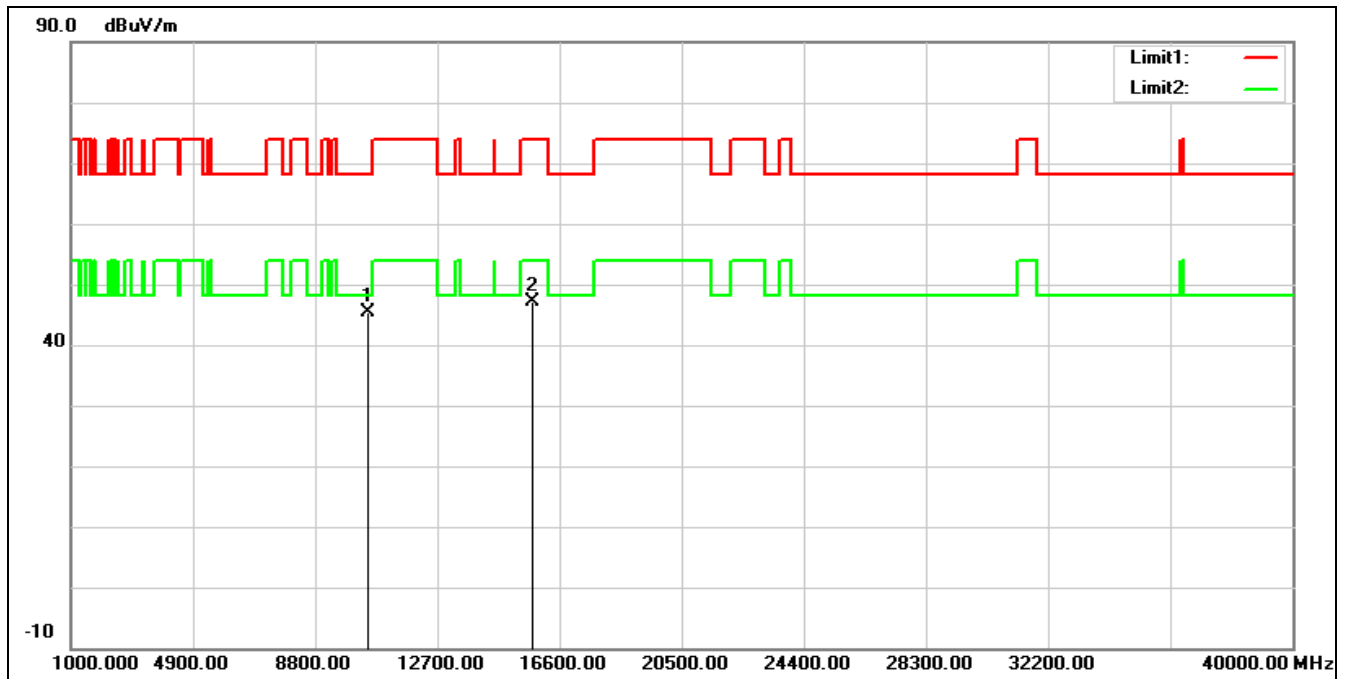


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	31.69	13.58	45.27	68.20	-22.93	peak
2	15720.000	30.47	16.57	47.04	74.00	-26.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5260 MHz		
Remark:			

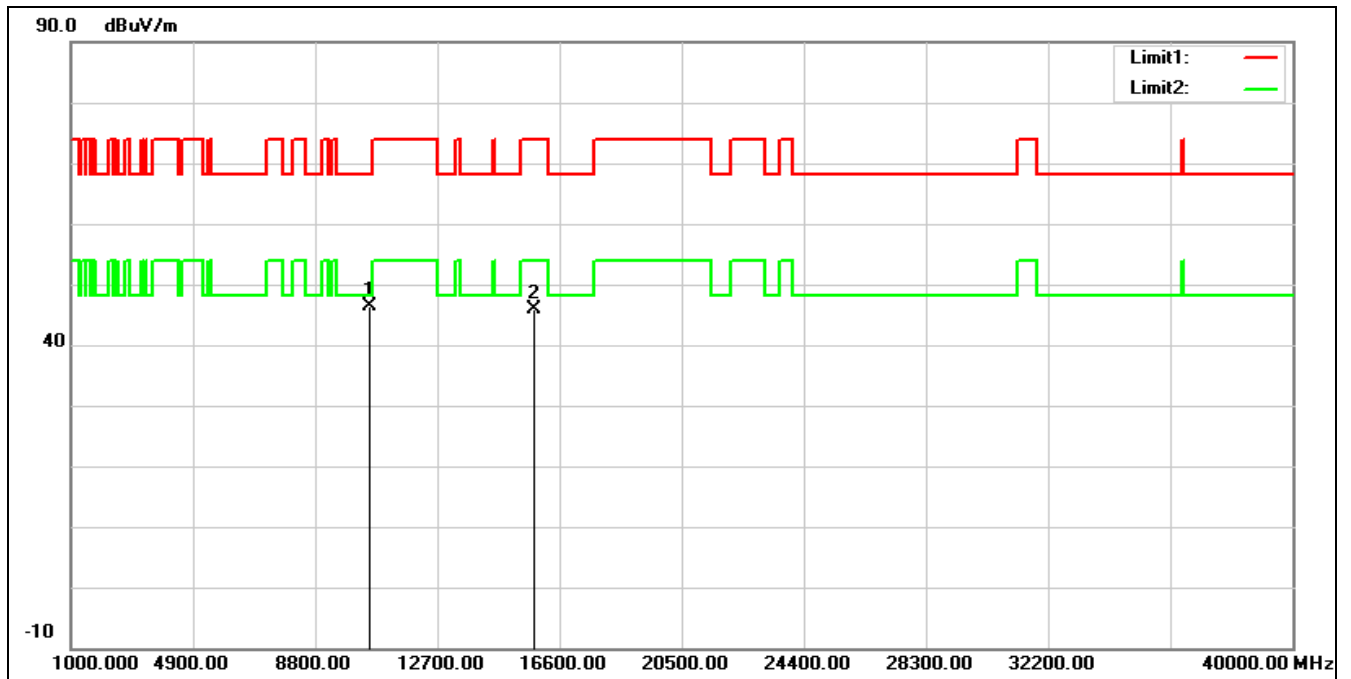


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	32.74	13.61	46.35	68.20	-21.85	peak
2	15780.000	29.46	16.52	45.98	74.00	-28.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5260 MHz		
Remark:			

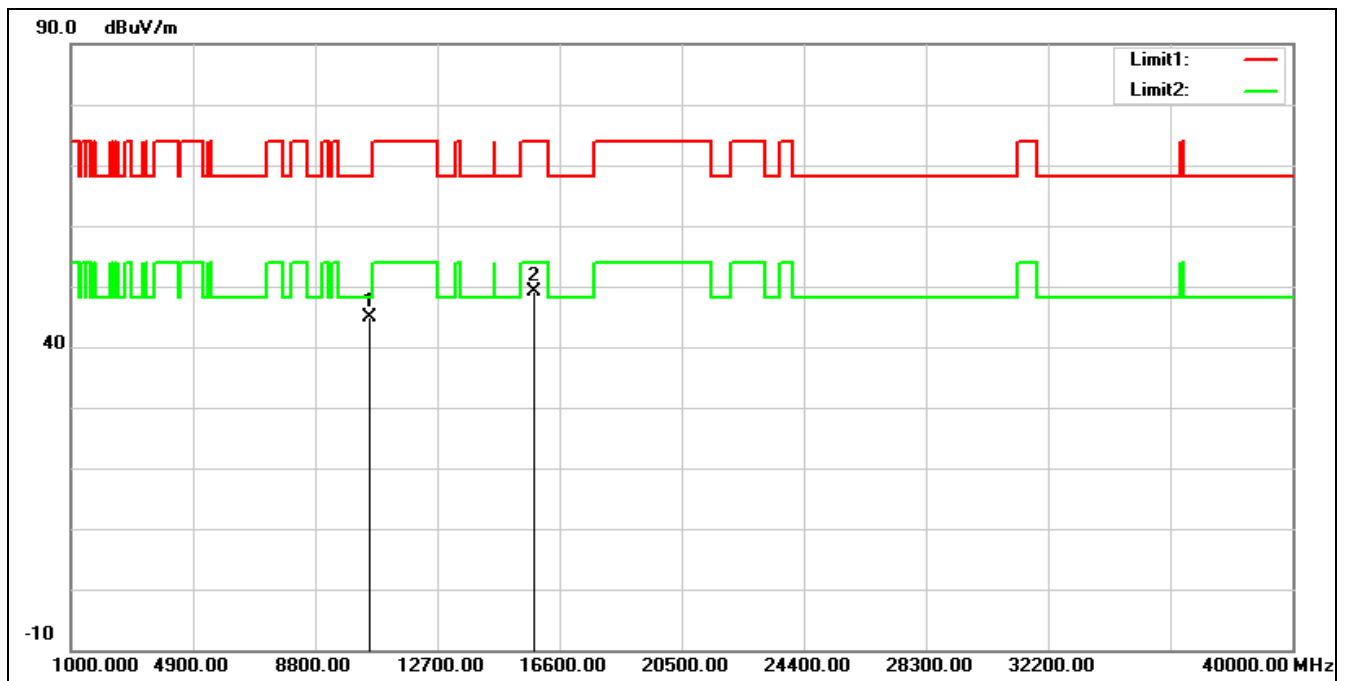

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	31.15	13.61	44.76	68.20	-23.44	peak
2	15780.000	32.66	16.52	49.18	74.00	-24.82	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5280 MHz
Remark:

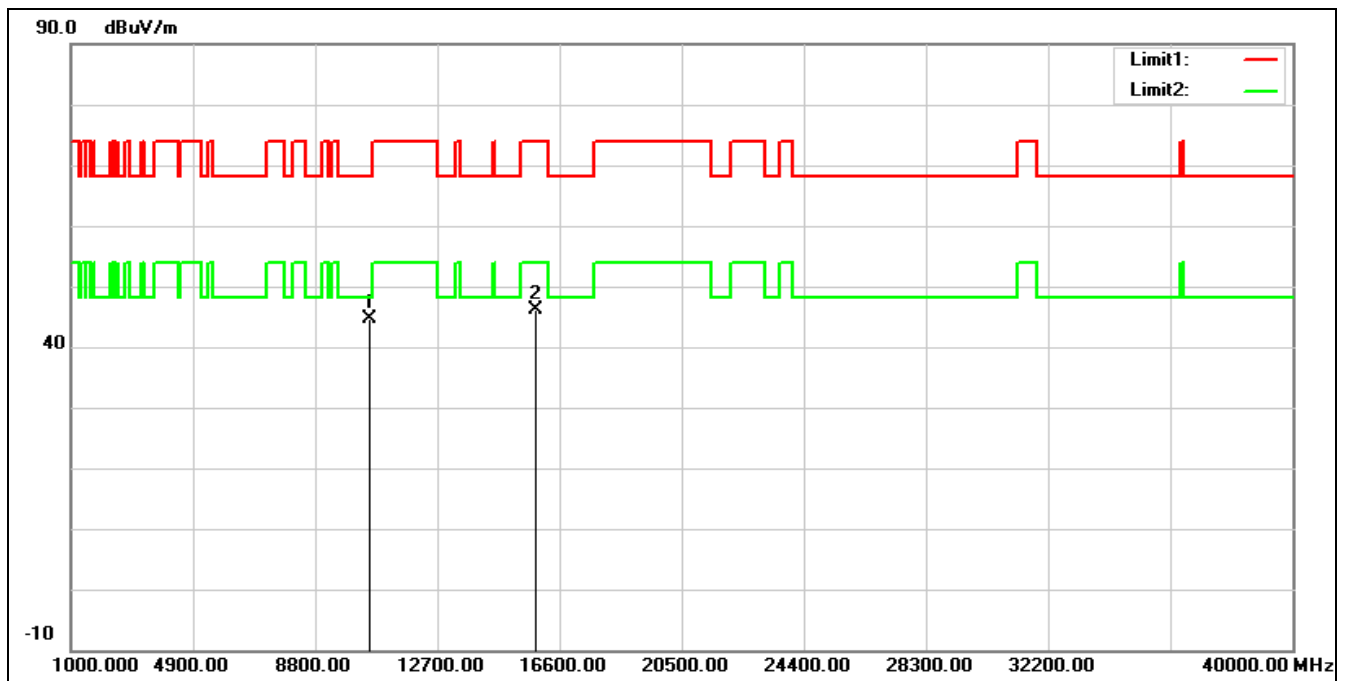


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	31.06	13.63	44.69	68.20	-23.51	peak
2	15840.000	29.77	16.40	46.17	74.00	-27.83	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5280 MHz

Remark:

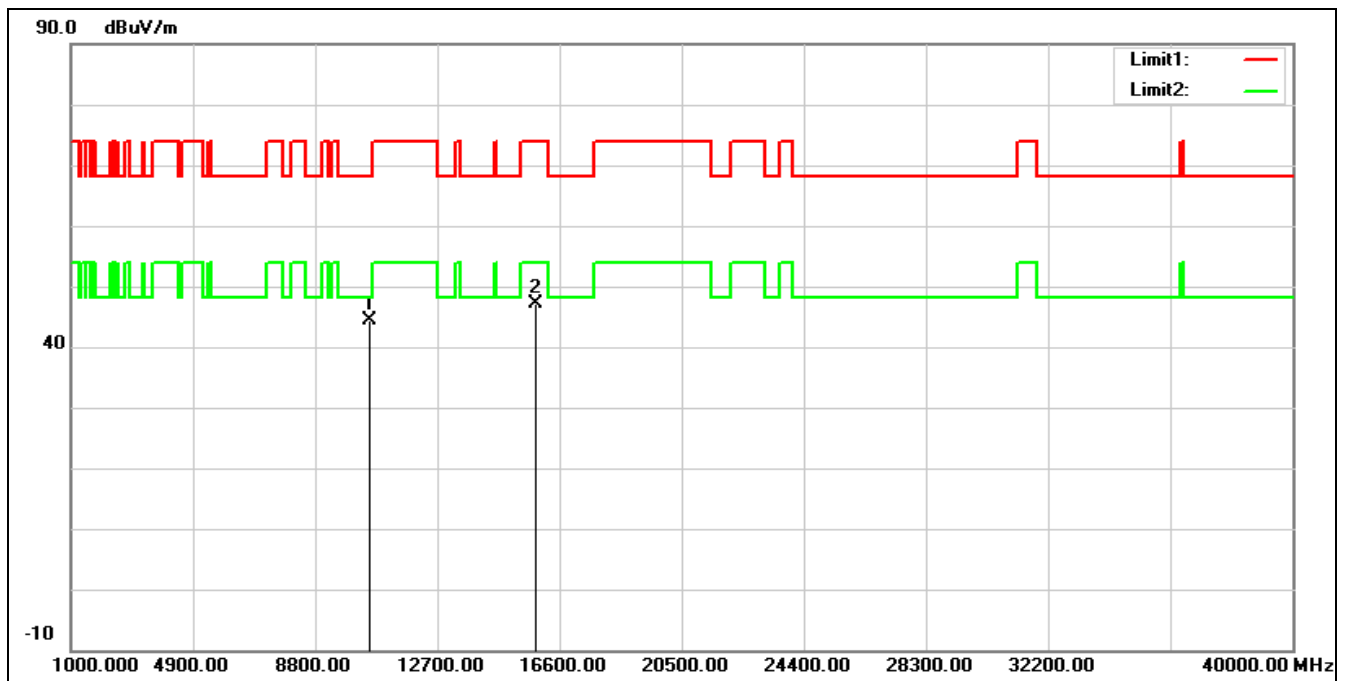


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	30.69	13.63	44.32	68.20	-23.88	peak
2	15840.000	30.85	16.40	47.25	74.00	-26.75	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5320 MHz
Remark:

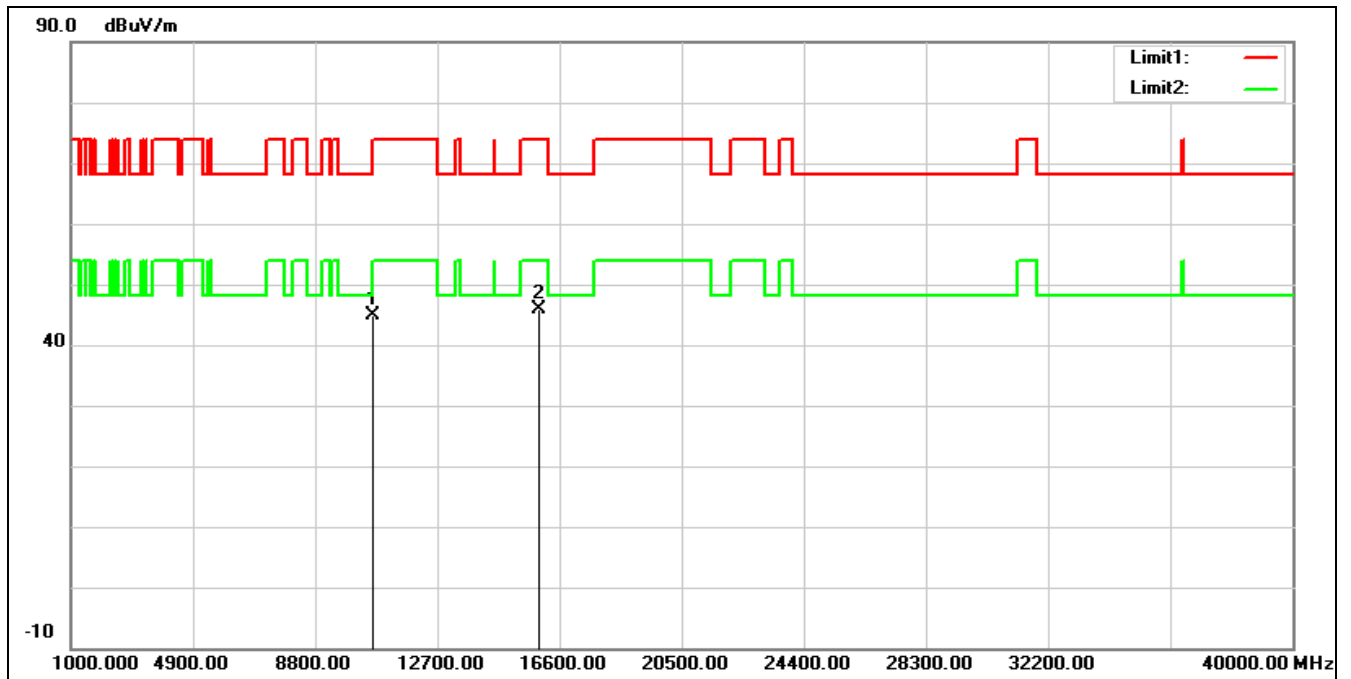


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.06	13.70	44.76	74.00	-29.24	peak
2*	15960.000	29.71	16.06	45.77	74.00	-28.23	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5320 MHz
Remark:

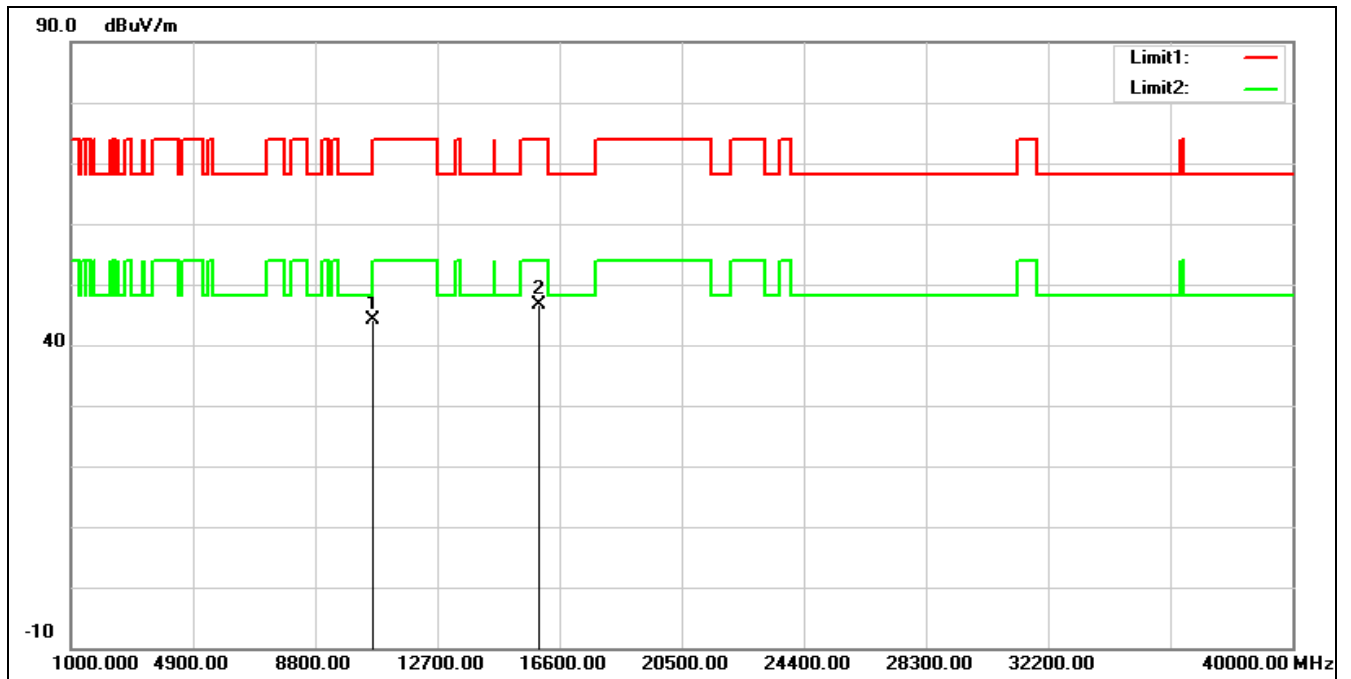

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	30.32	13.70	44.02	74.00	-29.98	peak
2*	15960.000	30.58	16.06	46.64	74.00	-27.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5500 MHz		
Remark:			

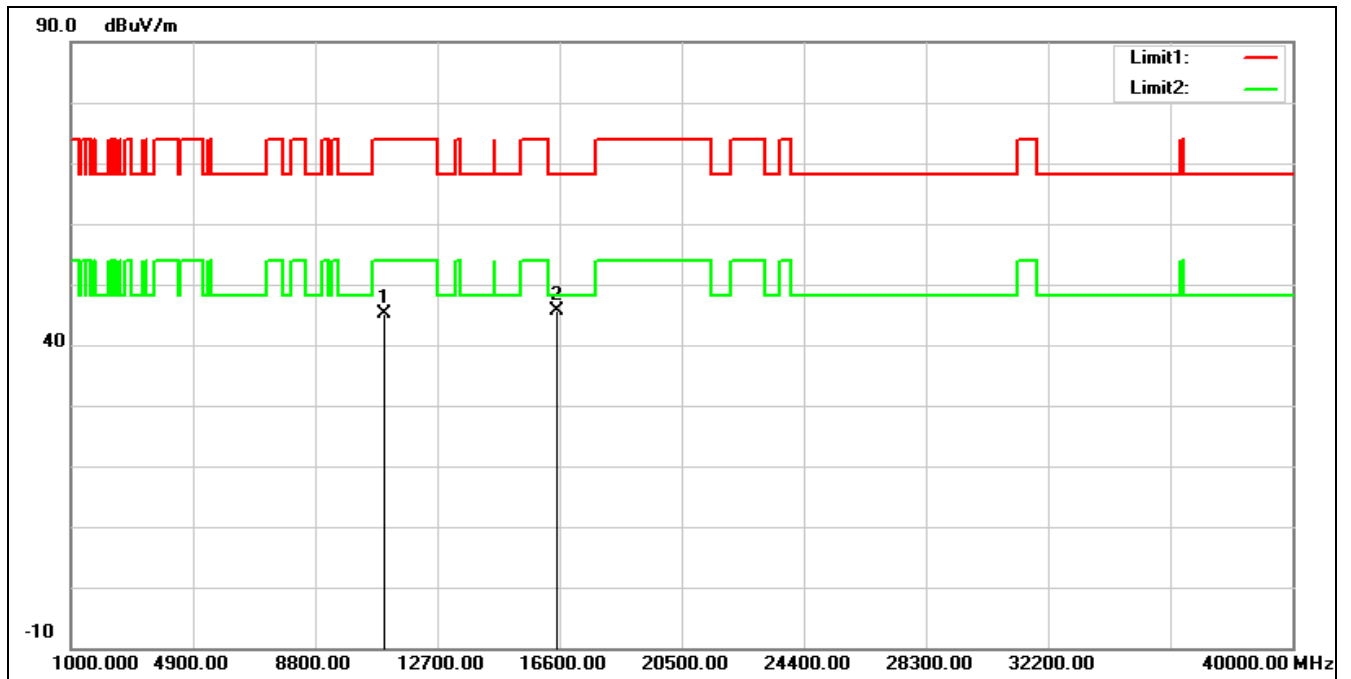


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	30.92	14.30	45.22	74.00	-28.78	peak
2*	16500.000	28.87	16.69	45.56	68.20	-22.64	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5500 MHz

Remark:

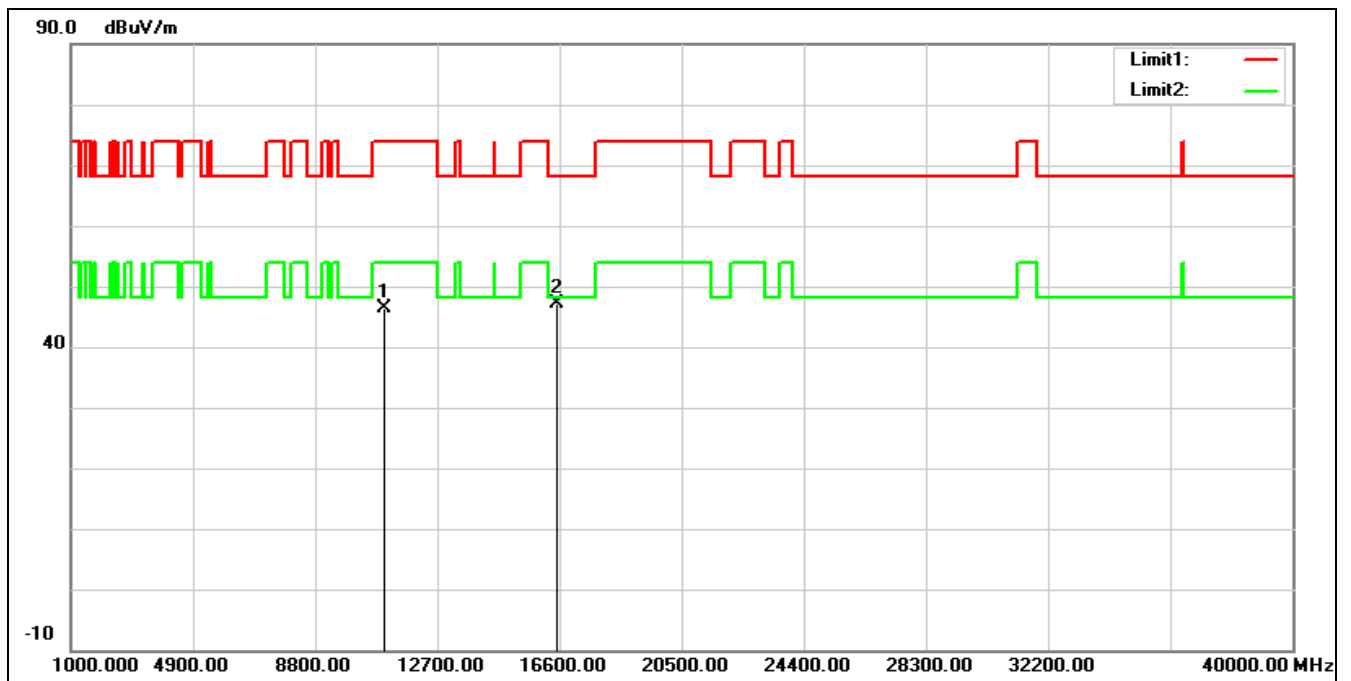


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	32.13	14.30	46.43	74.00	-27.57	peak
2*	16500.000	30.43	16.69	47.12	68.20	-21.08	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5560 MHz

Remark:

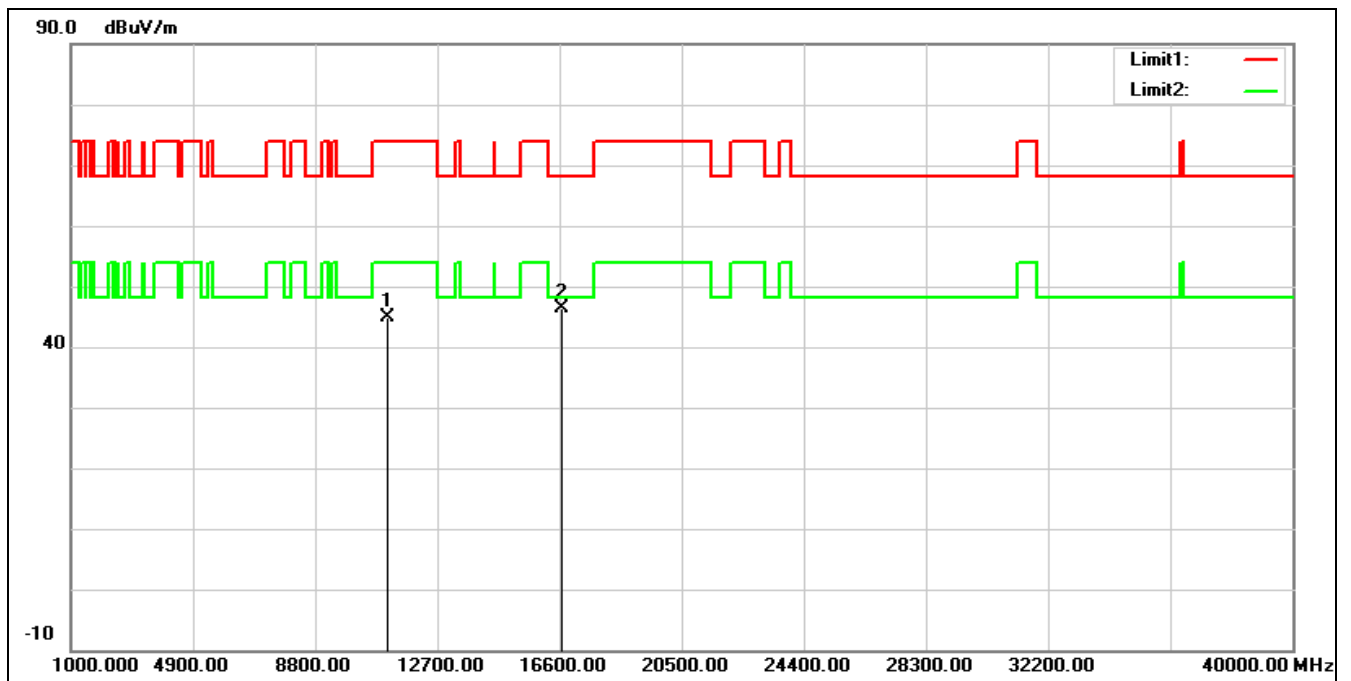


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	30.25	14.52	44.77	74.00	-29.23	peak
2*	16680.000	28.44	17.91	46.35	68.20	-21.85	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5560 MHz

Remark:

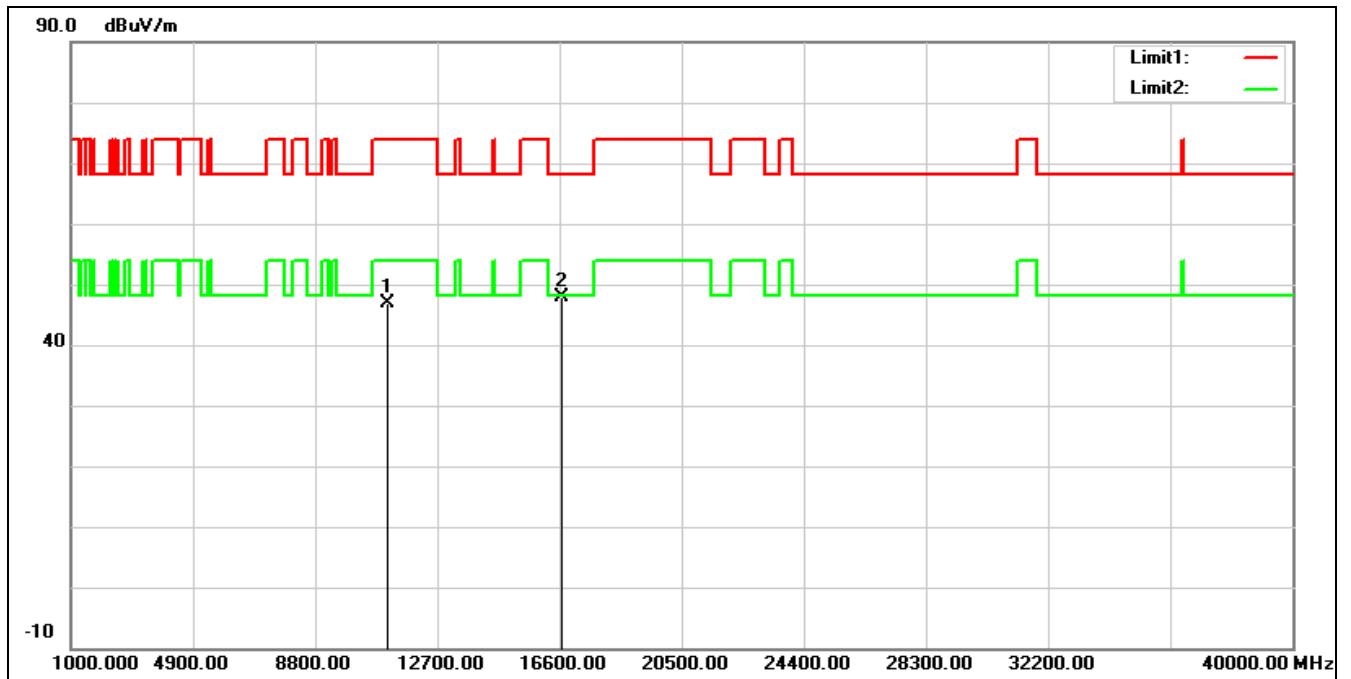


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	32.25	14.52	46.77	74.00	-27.23	peak
2*	16680.000	29.90	17.91	47.81	68.20	-20.39	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5700 MHz

Remark:

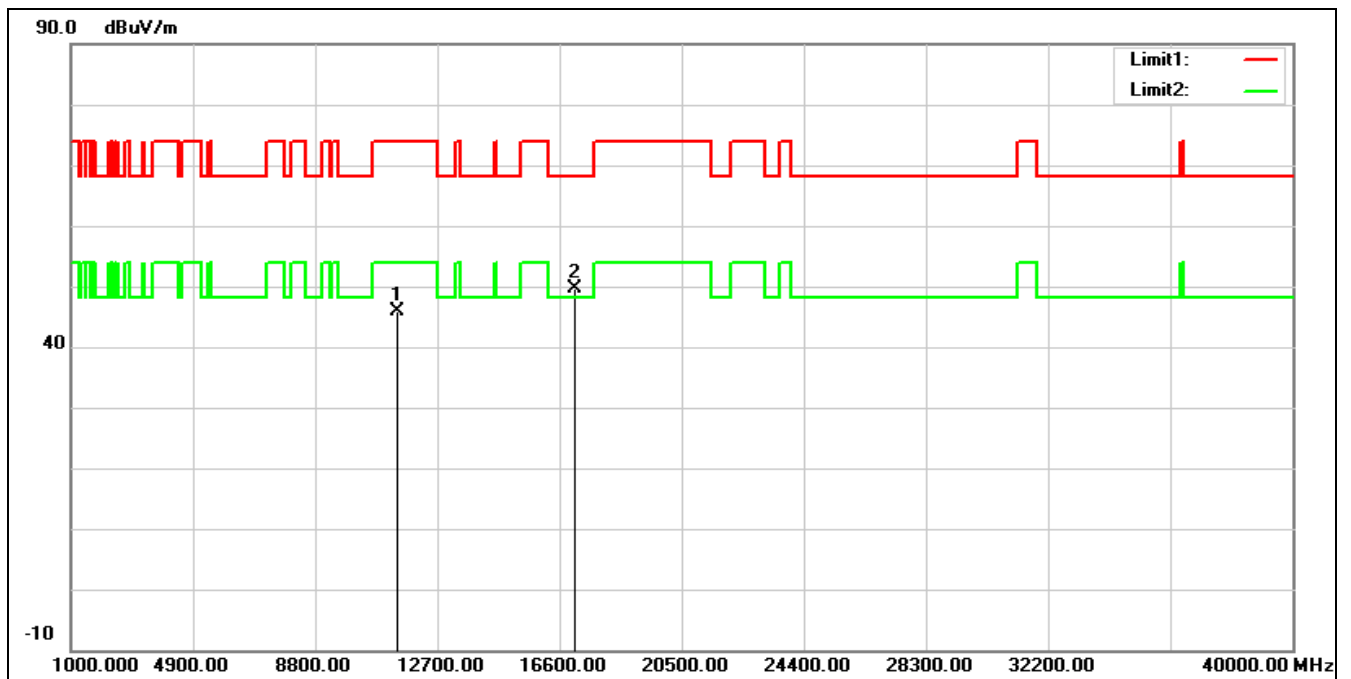

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.20	14.66	45.86	74.00	-28.14	peak
2*	17100.000	28.99	20.57	49.56	68.20	-18.64	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5700 MHz
Remark:

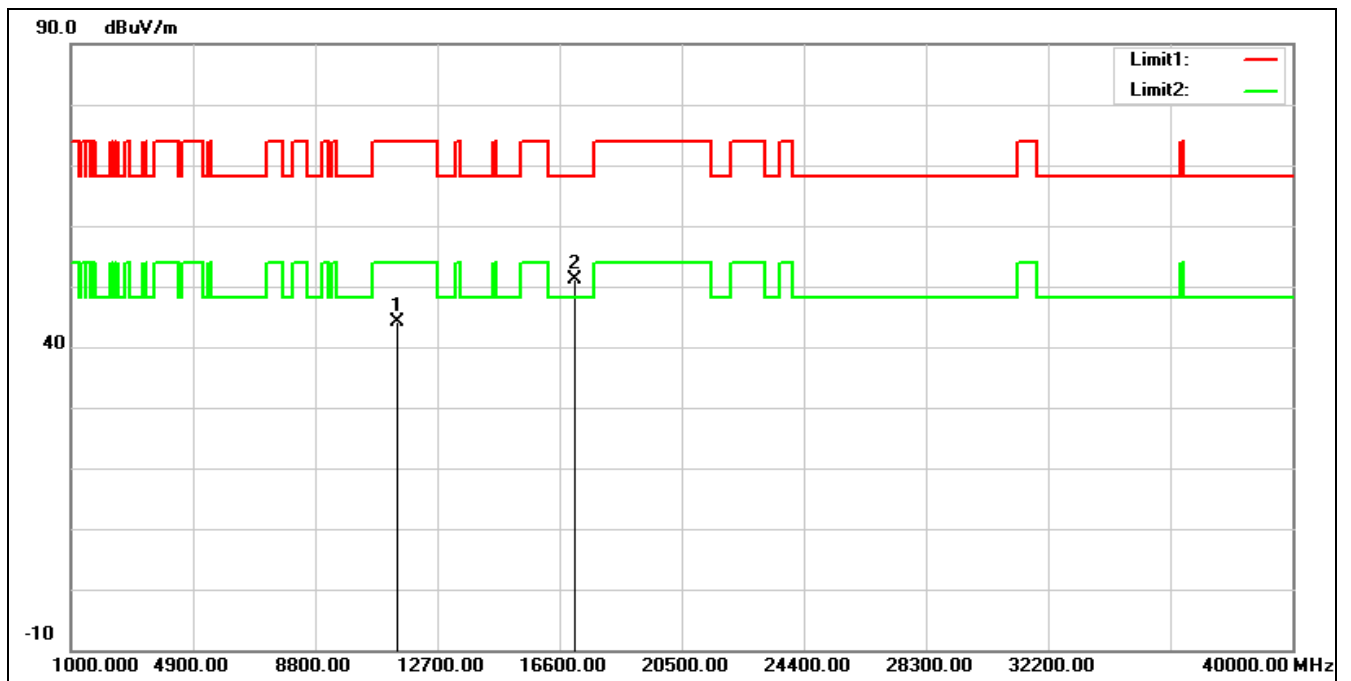


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	29.48	14.66	44.14	74.00	-29.86	peak
2*	17100.000	30.47	20.57	51.04	68.20	-17.16	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

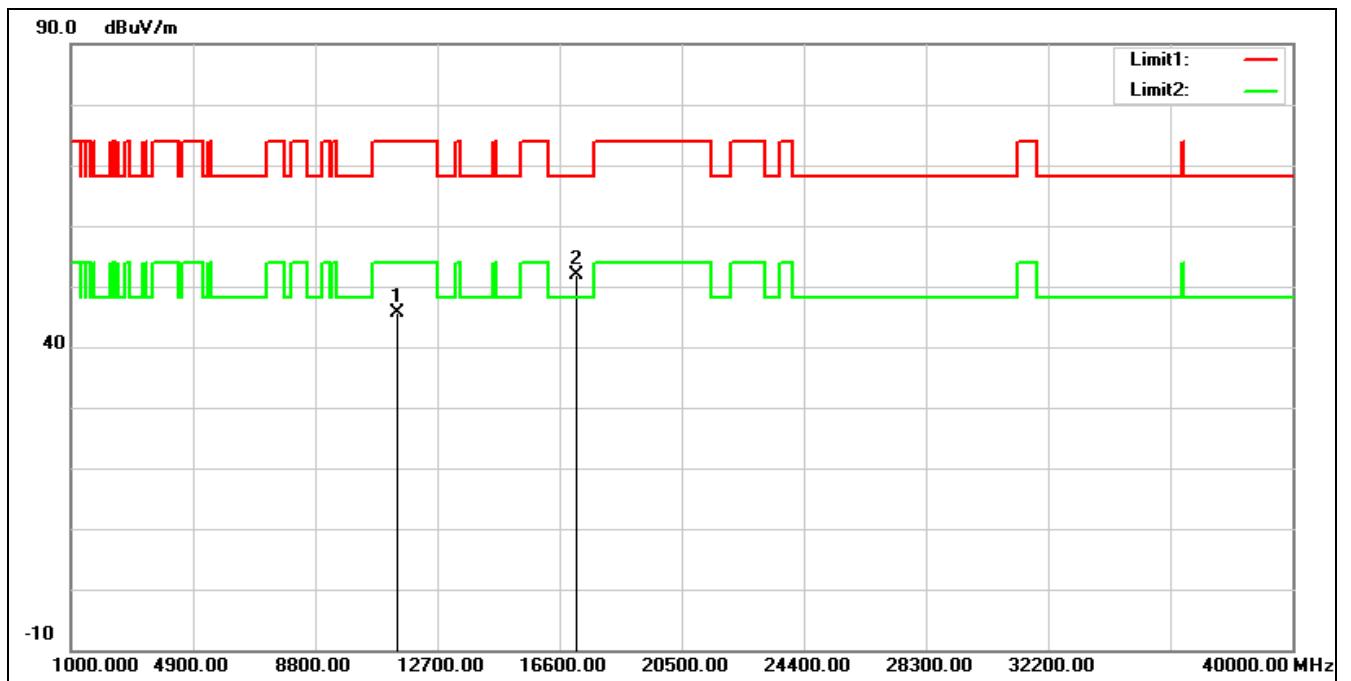


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	30.67	14.84	45.51	74.00	-28.49	peak
2*	17160.000	31.00	20.96	51.96	68.20	-16.24	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

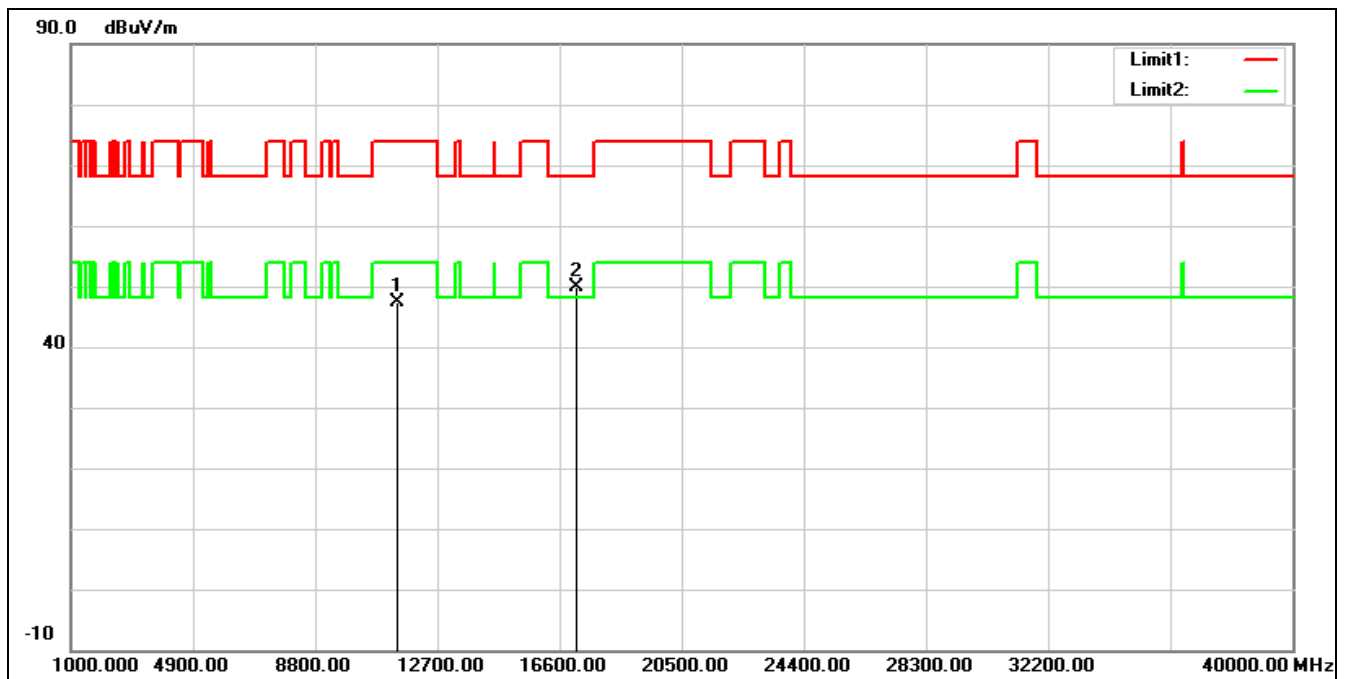


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	32.52	14.84	47.36	74.00	-26.64	peak
2*	17160.000	28.93	20.96	49.89	68.20	-18.31	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5745 MHz

Remark:

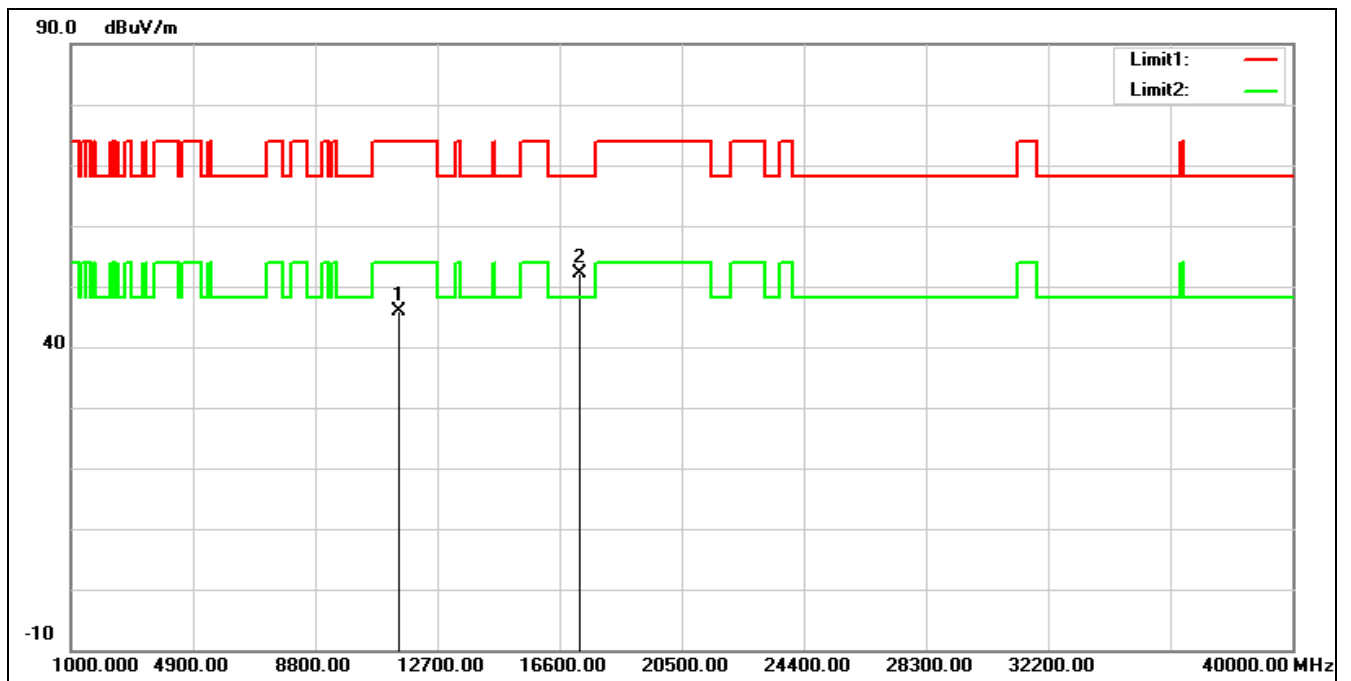


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.84	15.07	45.91	74.00	-28.09	peak
2*	17235.000	30.63	21.53	52.16	68.20	-16.04	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5745 MHz

Remark:

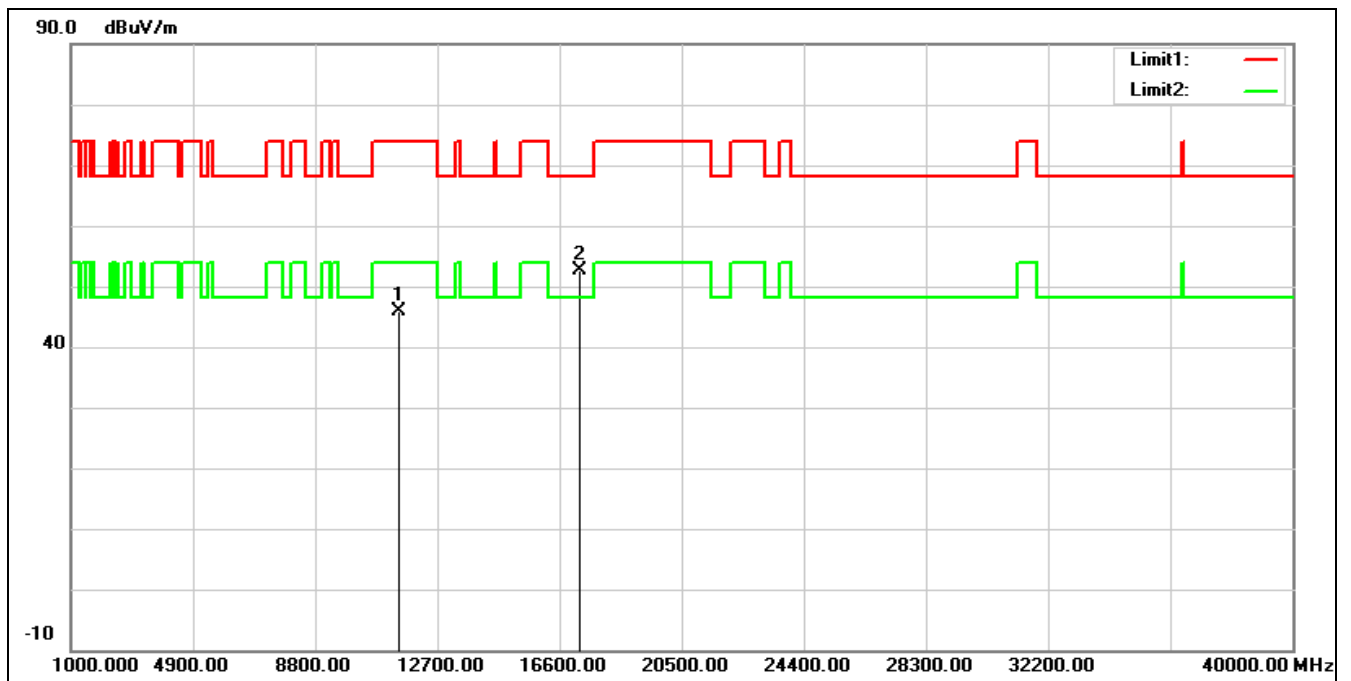


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	30.71	15.07	45.78	74.00	-28.22	peak
2*	17235.000	31.16	21.53	52.69	68.20	-15.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5785 MHz

Remark:

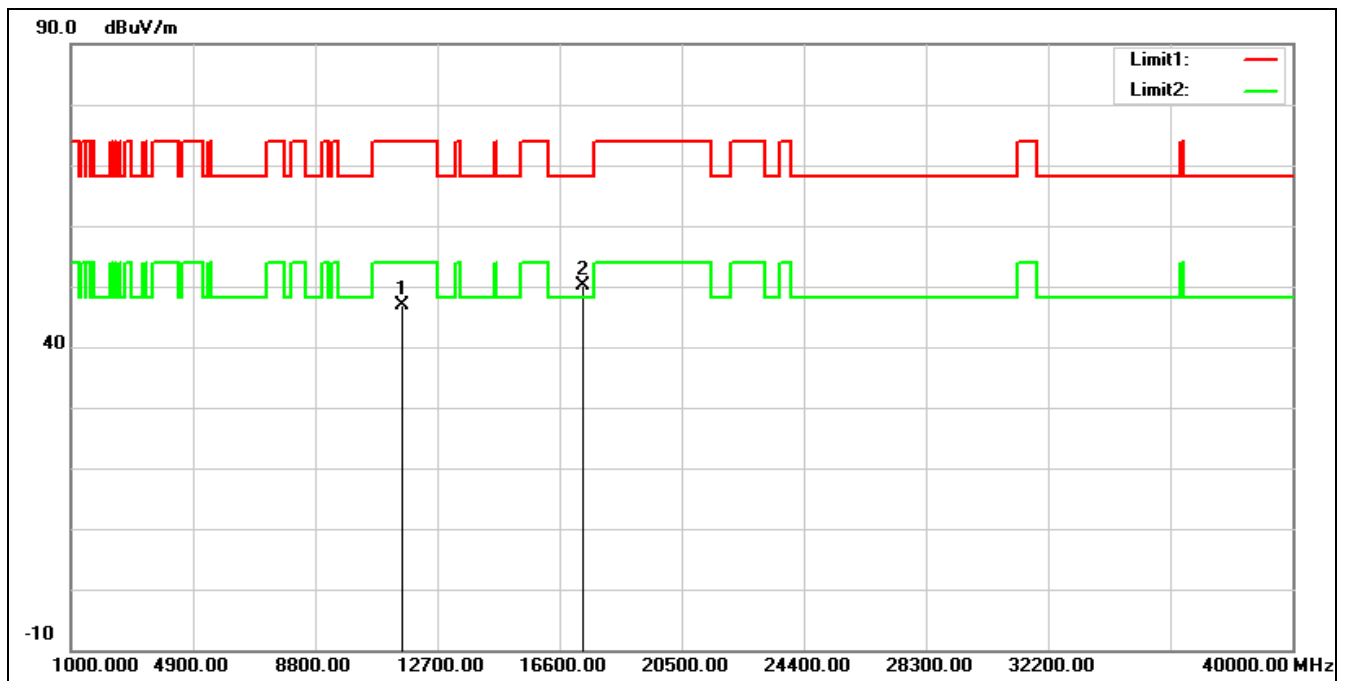

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.96	14.84	46.80	74.00	-27.20	peak
2*	17355.000	27.84	22.35	50.19	68.20	-18.01	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5785 MHz
Remark:

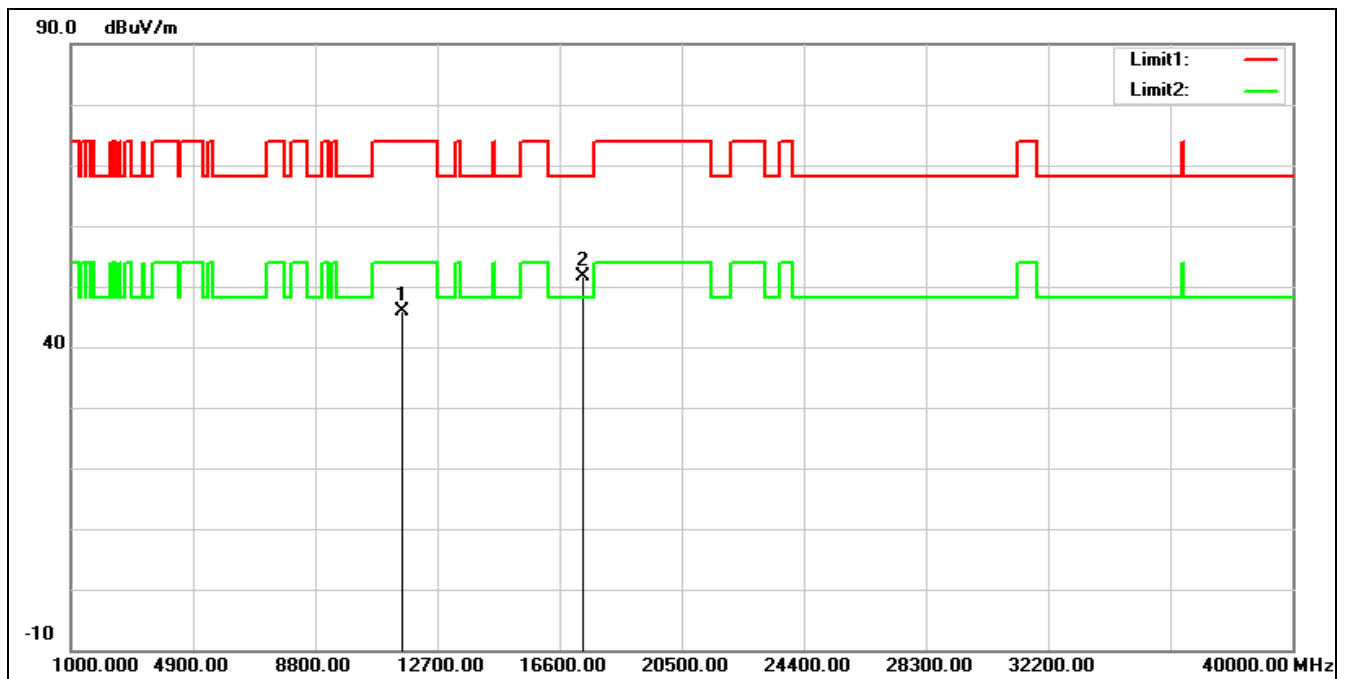


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.14	14.84	45.98	74.00	-28.02	peak
2*	17355.000	29.25	22.35	51.60	68.20	-16.60	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5825 MHz

Remark:

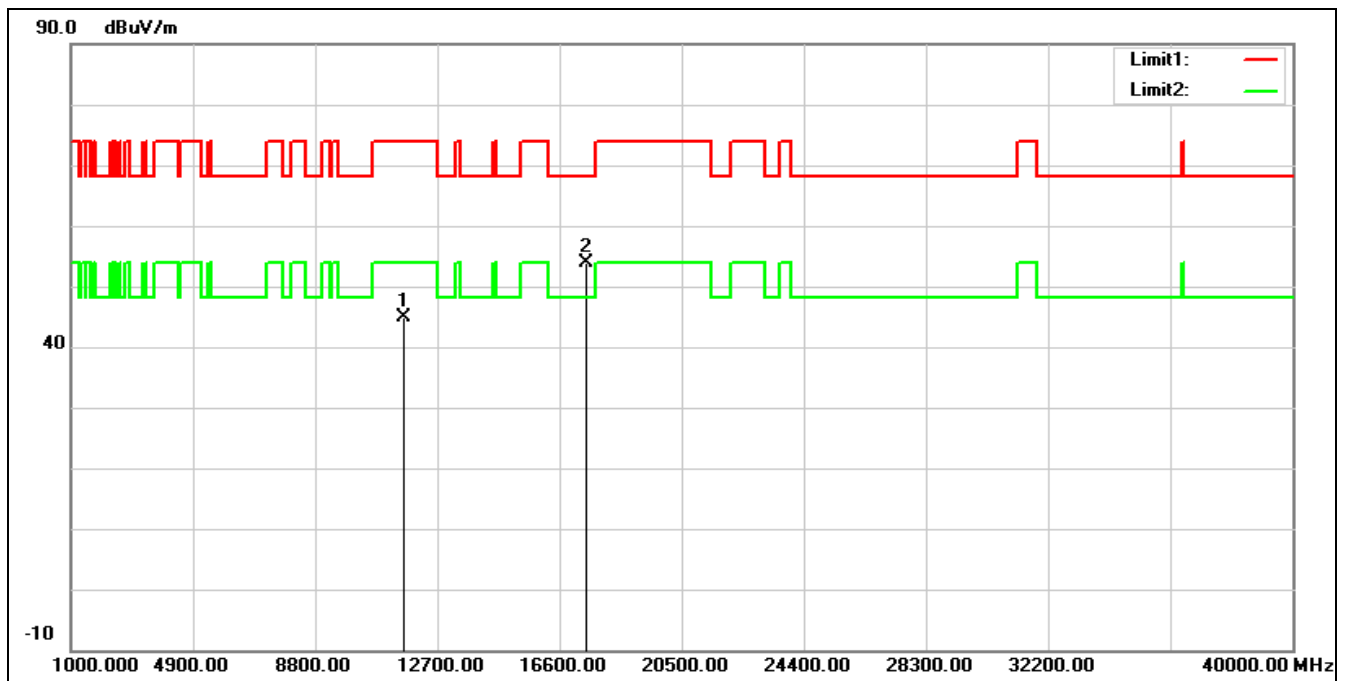


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.31	14.56	44.87	74.00	-29.13	peak
2*	17475.000	30.58	23.20	53.78	68.20	-14.42	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5825 MHz
Remark:

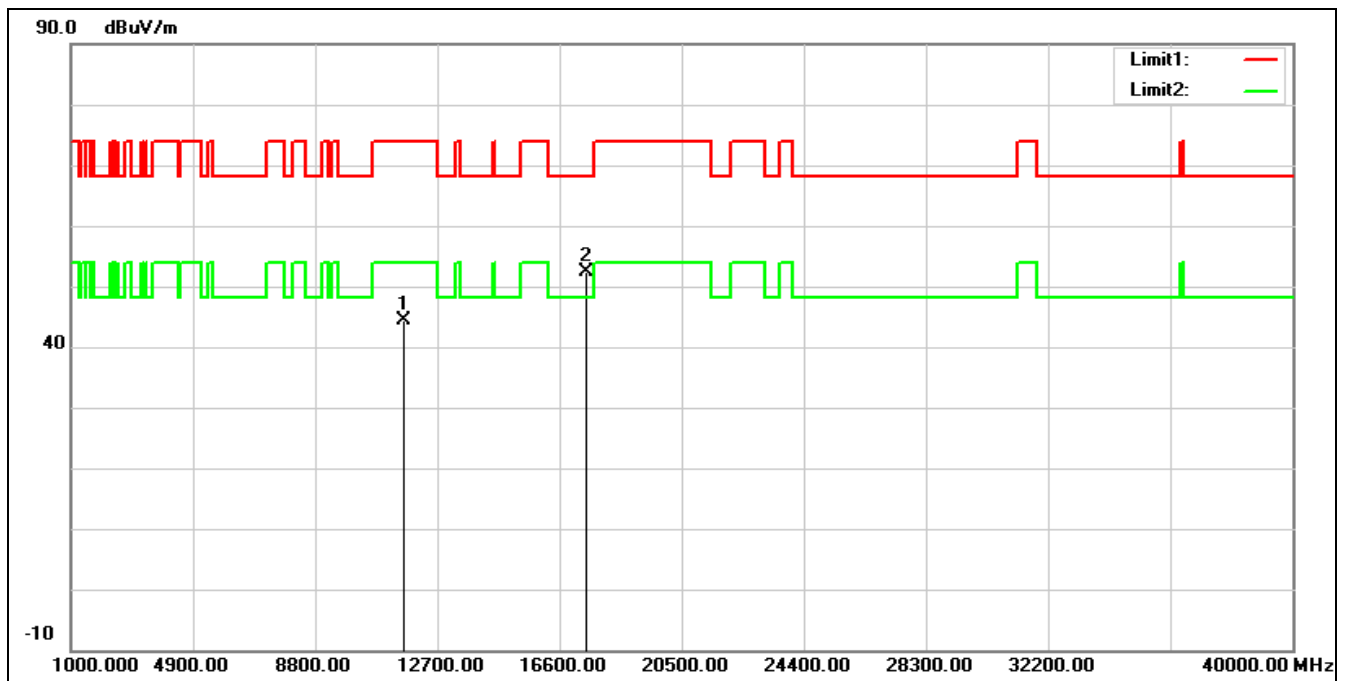


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	29.77	14.56	44.33	74.00	-29.67	peak
2*	17475.000	29.08	23.20	52.28	68.20	-15.92	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5190 MHz
Remark:

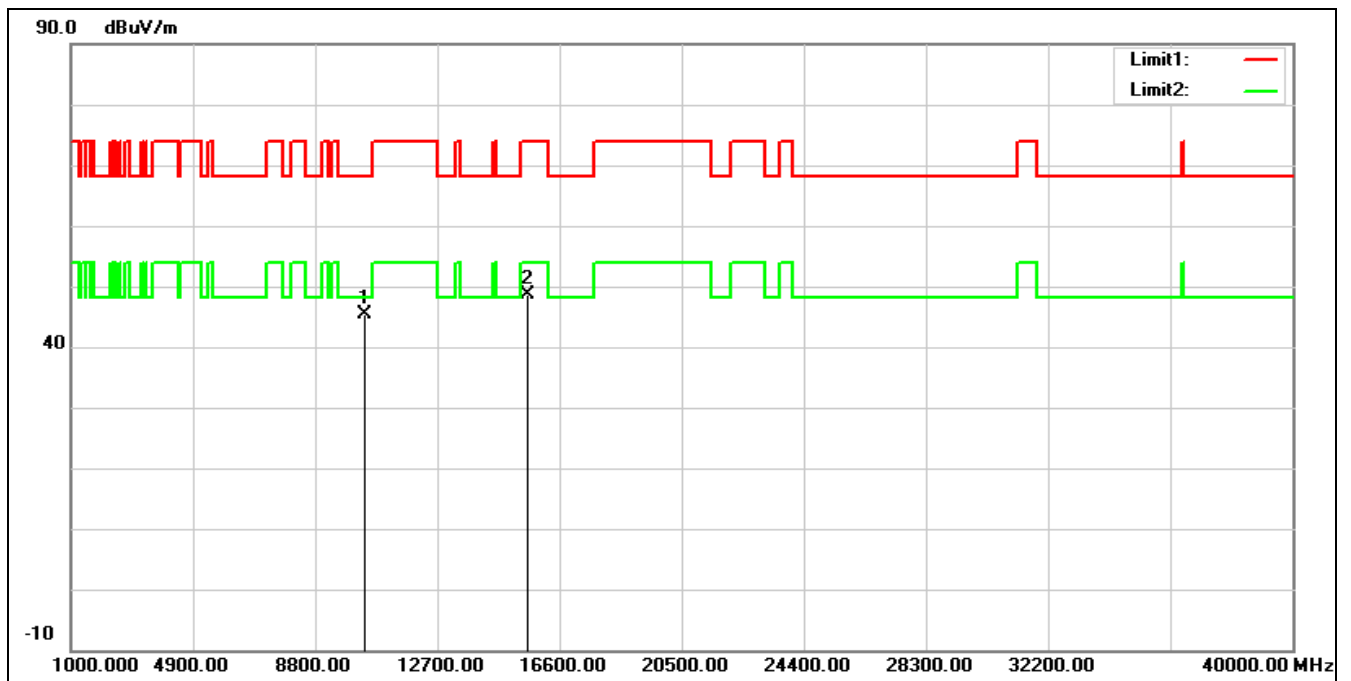


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	31.98	13.44	45.42	68.20	-22.78	peak
2	15570.000	31.80	16.72	48.52	74.00	-25.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

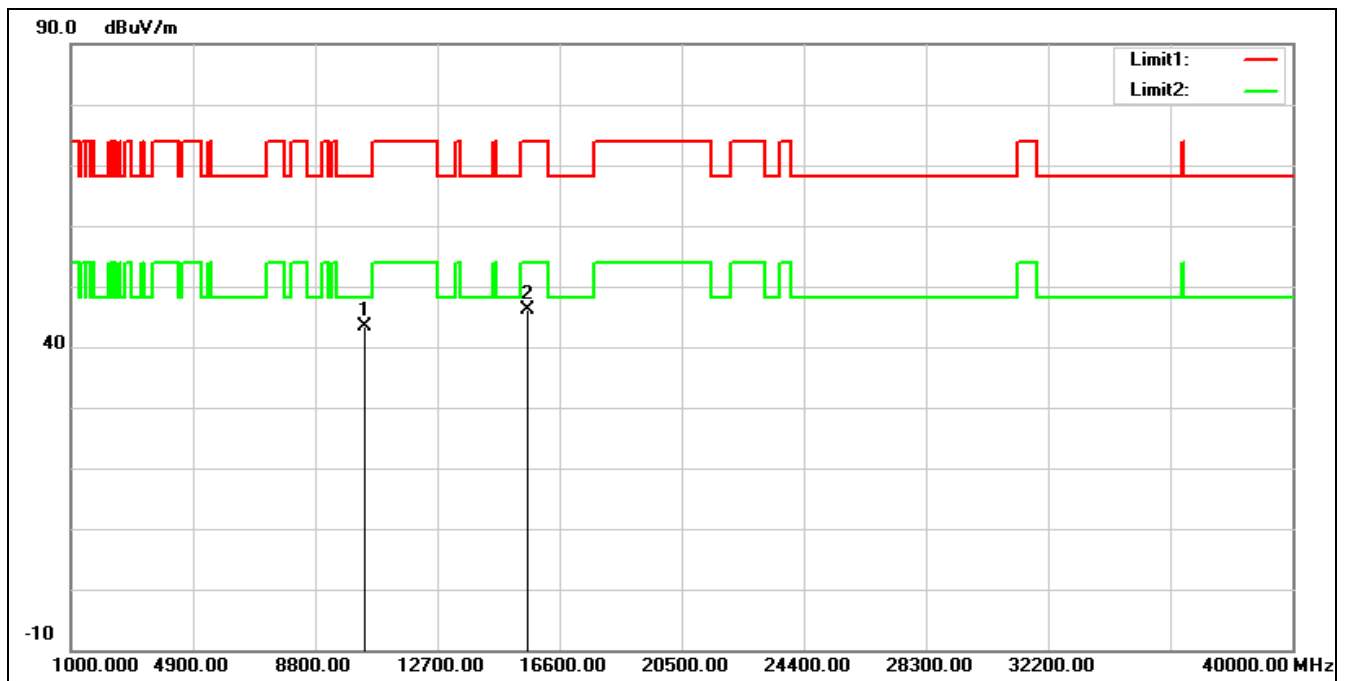

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	30.02	13.44	43.46	68.20	-24.74	peak
2	15570.000	29.39	16.72	46.11	74.00	-27.89	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5230 MHz
Remark:

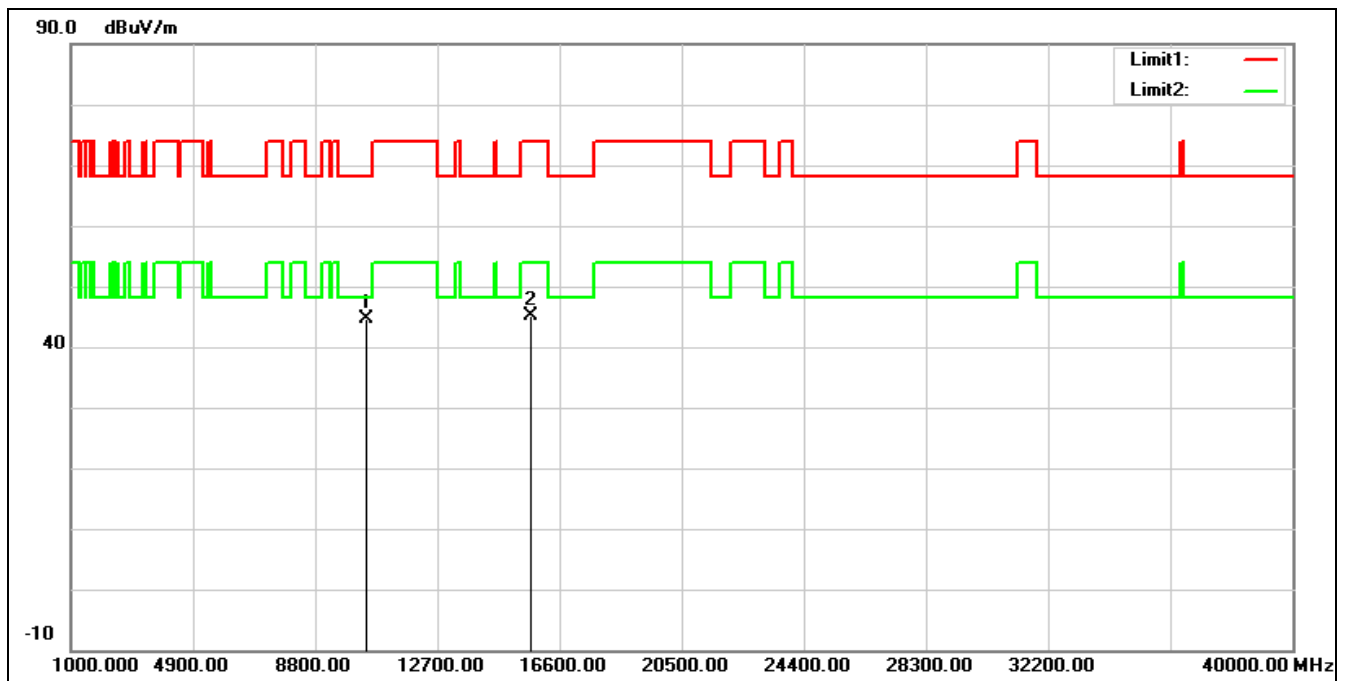


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	31.02	13.57	44.59	68.20	-23.61	peak
2	15690.000	28.47	16.59	45.06	74.00	-28.94	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5230 MHz

Remark:

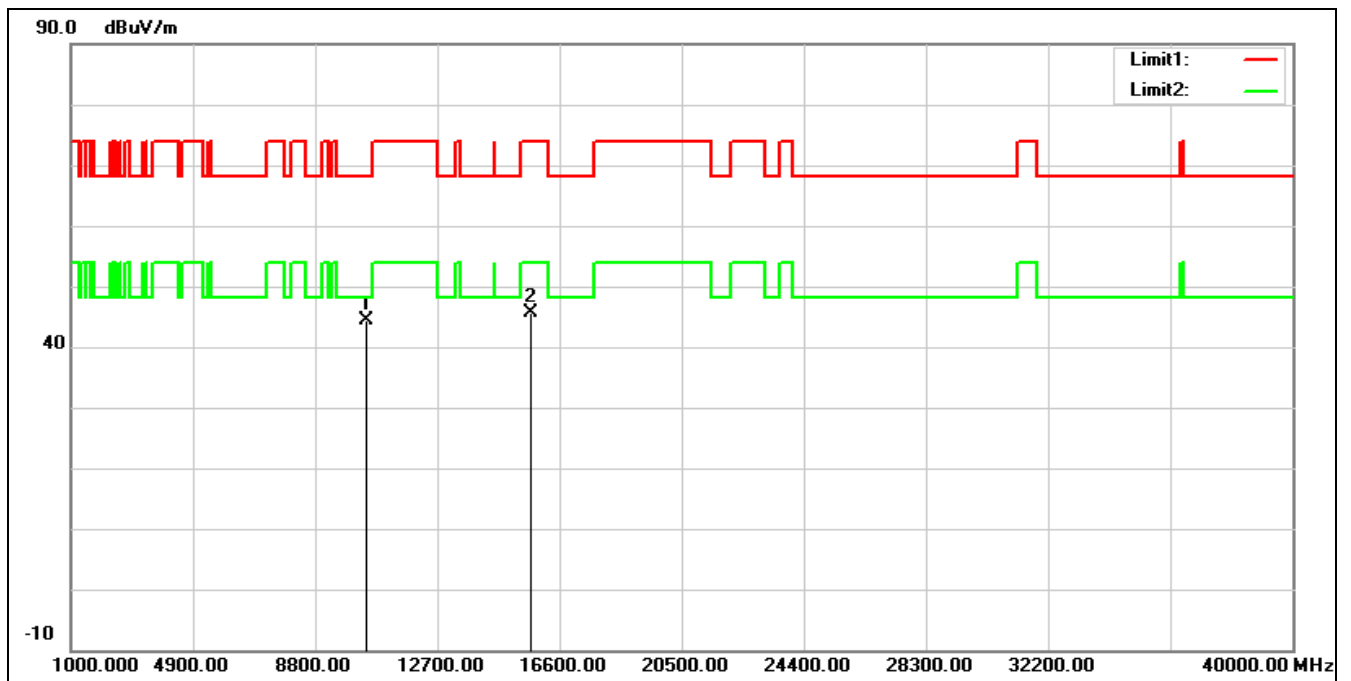


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	30.77	13.57	44.34	68.20	-23.86	peak
2	15690.000	28.94	16.59	45.53	74.00	-28.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5270 MHz

Remark:

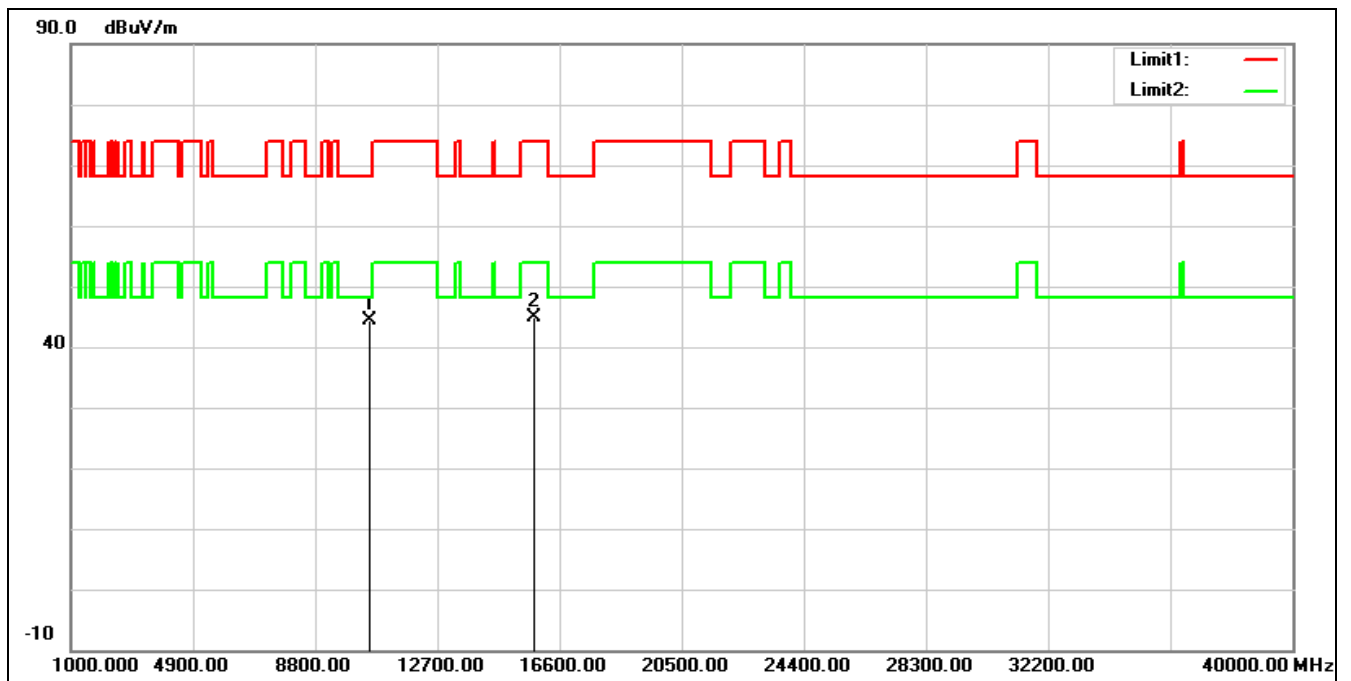

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	30.85	13.61	44.46	68.20	-23.74	peak
2	15810.000	28.33	16.48	44.81	74.00	-29.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5270 MHz		
Remark:			

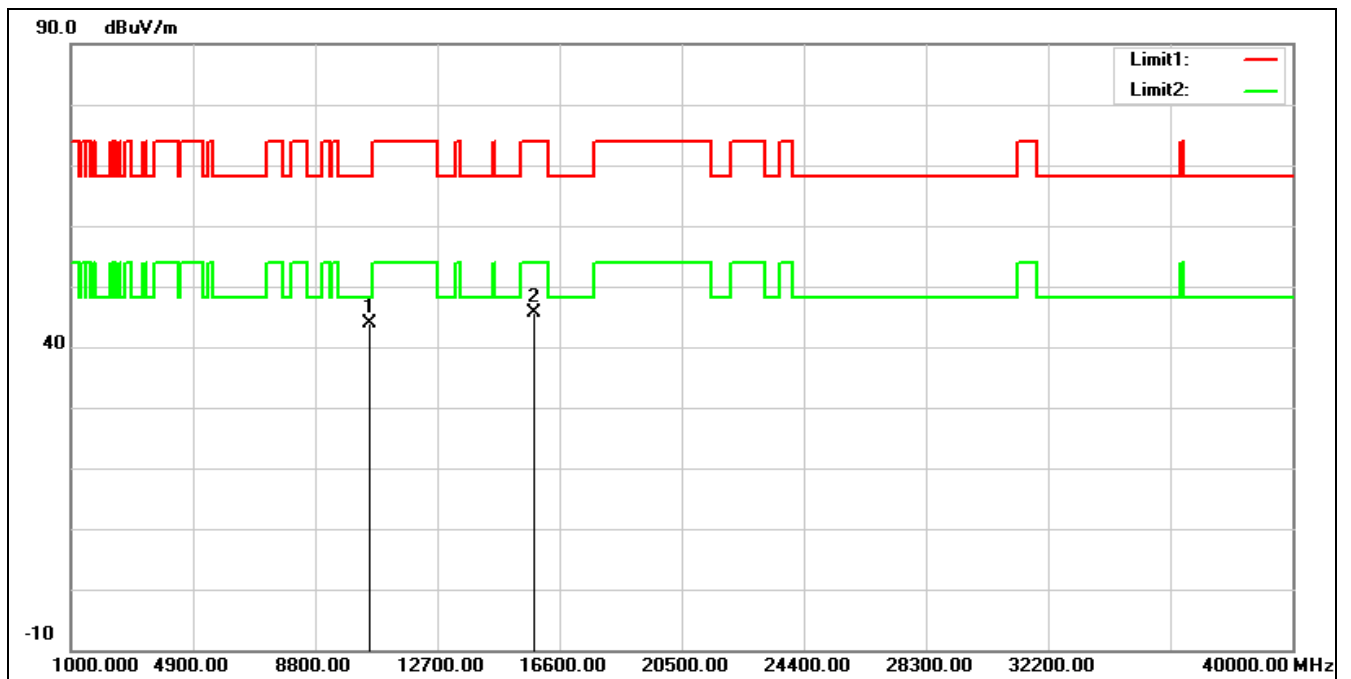


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	30.21	13.61	43.82	68.20	-24.38	peak
2	15810.000	29.08	16.48	45.56	74.00	-28.44	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5310 MHz

Remark:

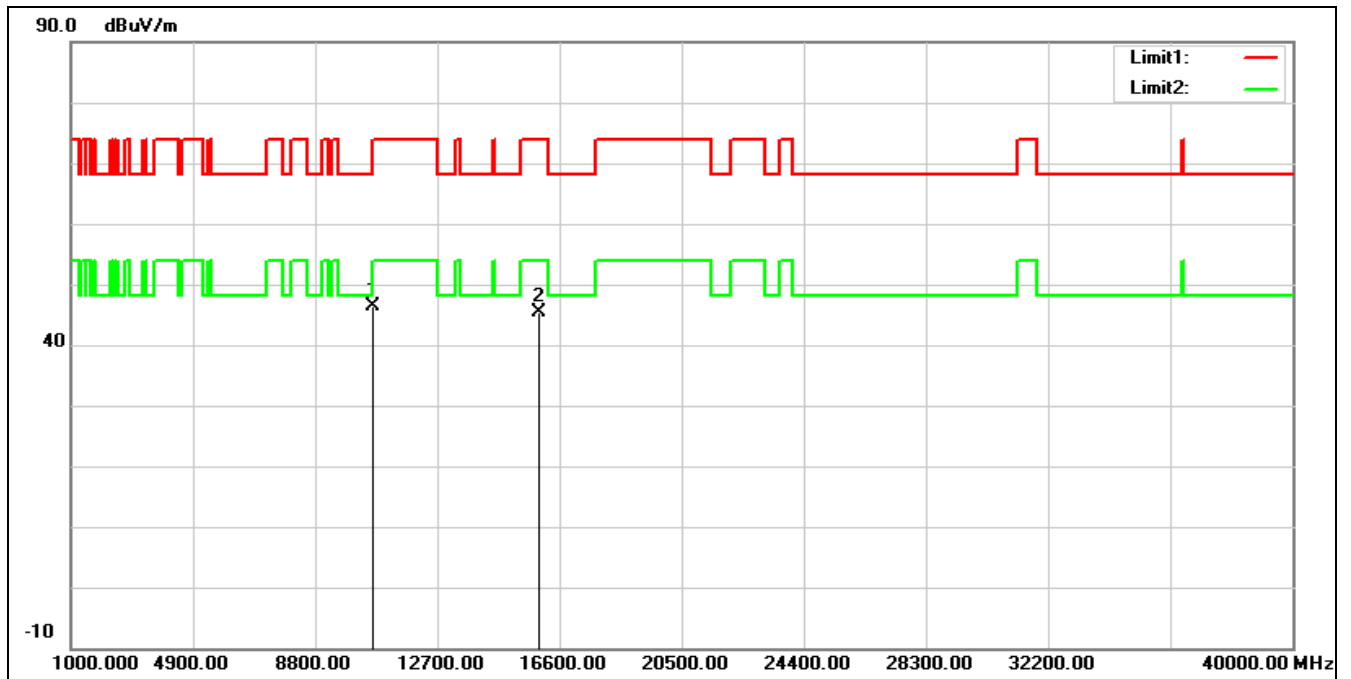

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10620.000	32.66	13.66	46.32	74.00	-27.68	peak
2	15930.000	29.17	16.15	45.32	74.00	-28.68	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5310 MHz
Remark:

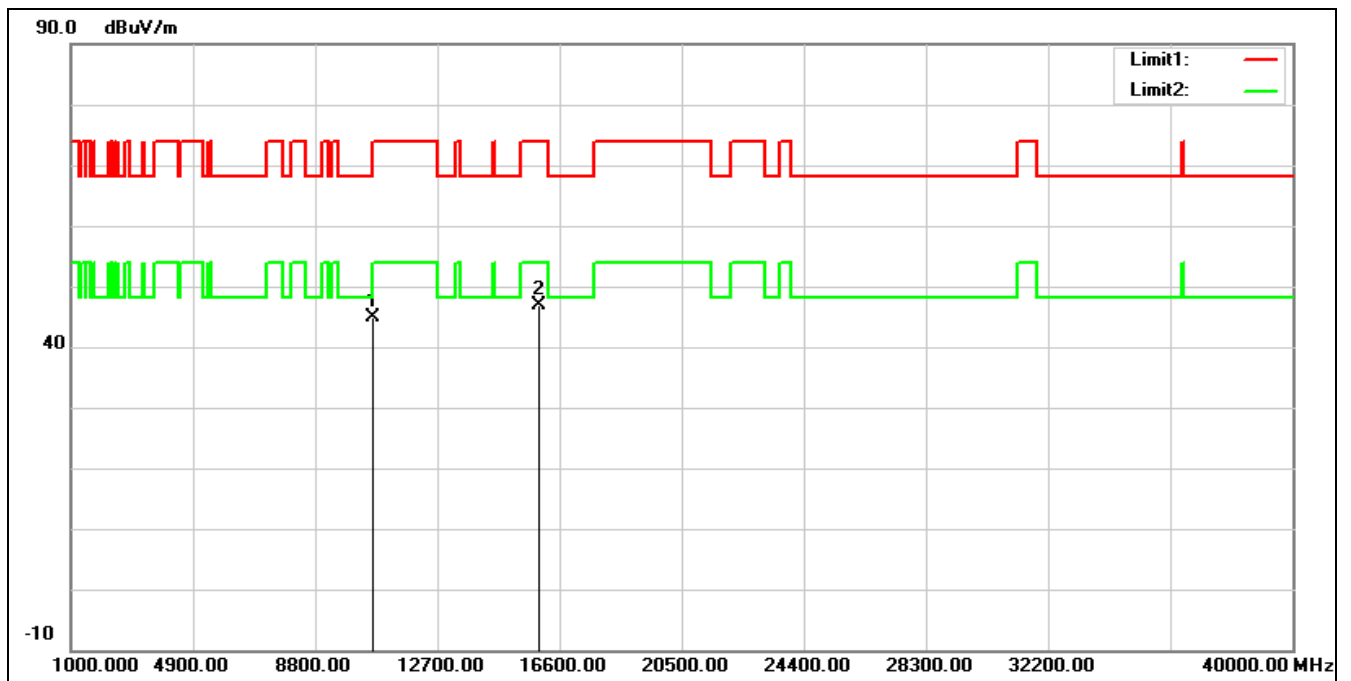


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	31.29	13.66	44.95	74.00	-29.05	peak
2*	15930.000	30.68	16.15	46.83	74.00	-27.17	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5510 MHz

Remark:

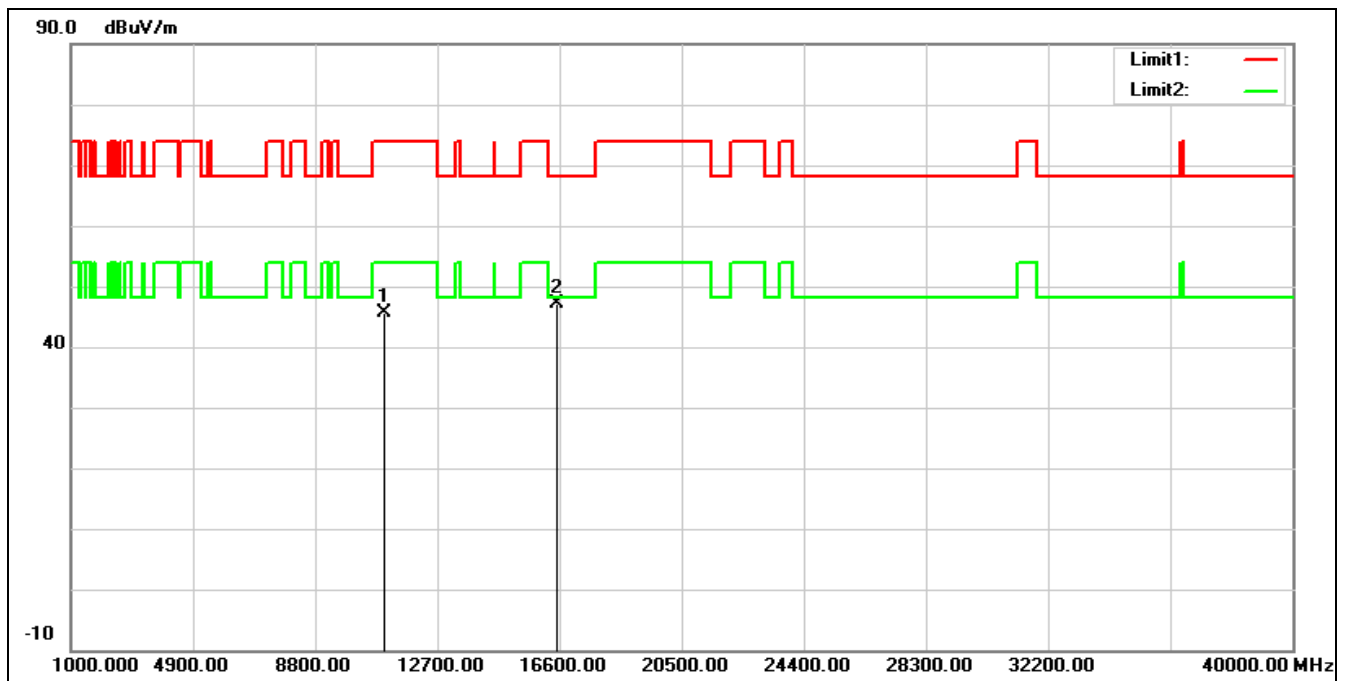


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.31	14.35	45.66	74.00	-28.34	peak
2*	16530.000	30.21	16.91	47.12	68.20	-21.08	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5510 MHz

Remark:

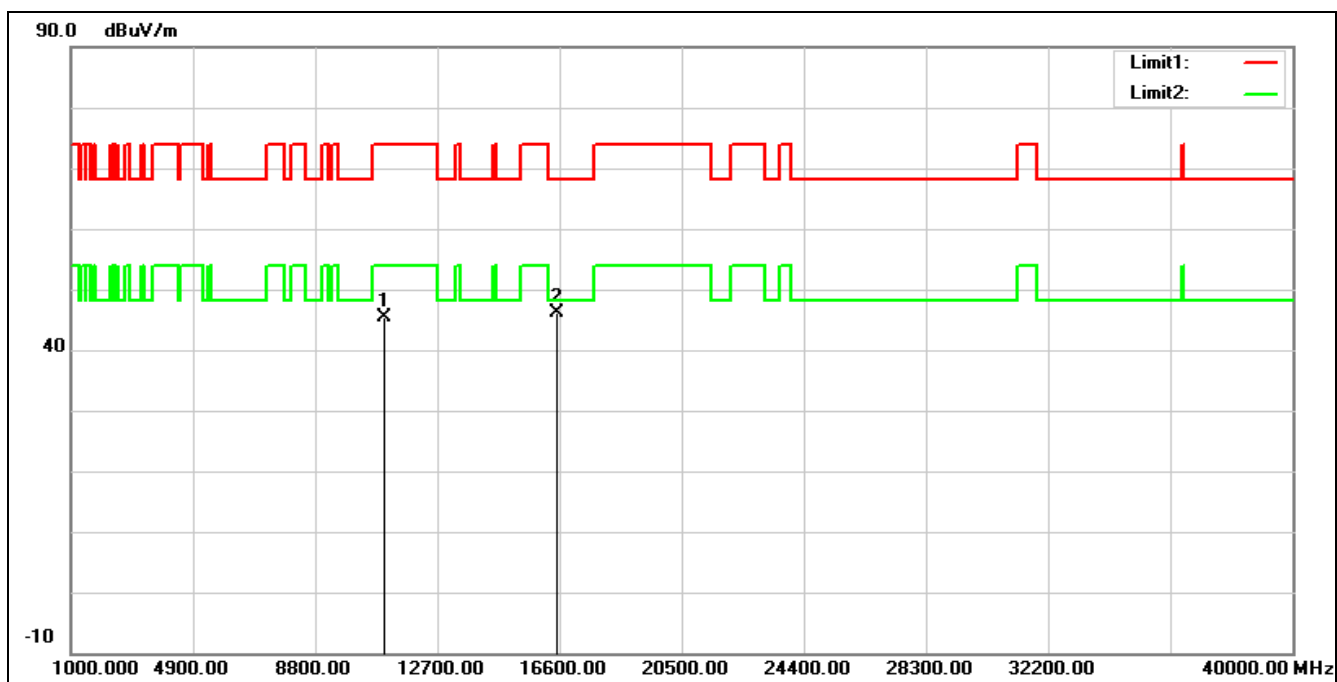


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.11	14.35	45.46	74.00	-28.54	peak
2*	16530.000	29.24	16.91	46.15	68.20	-22.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5550 MHz

Remark:

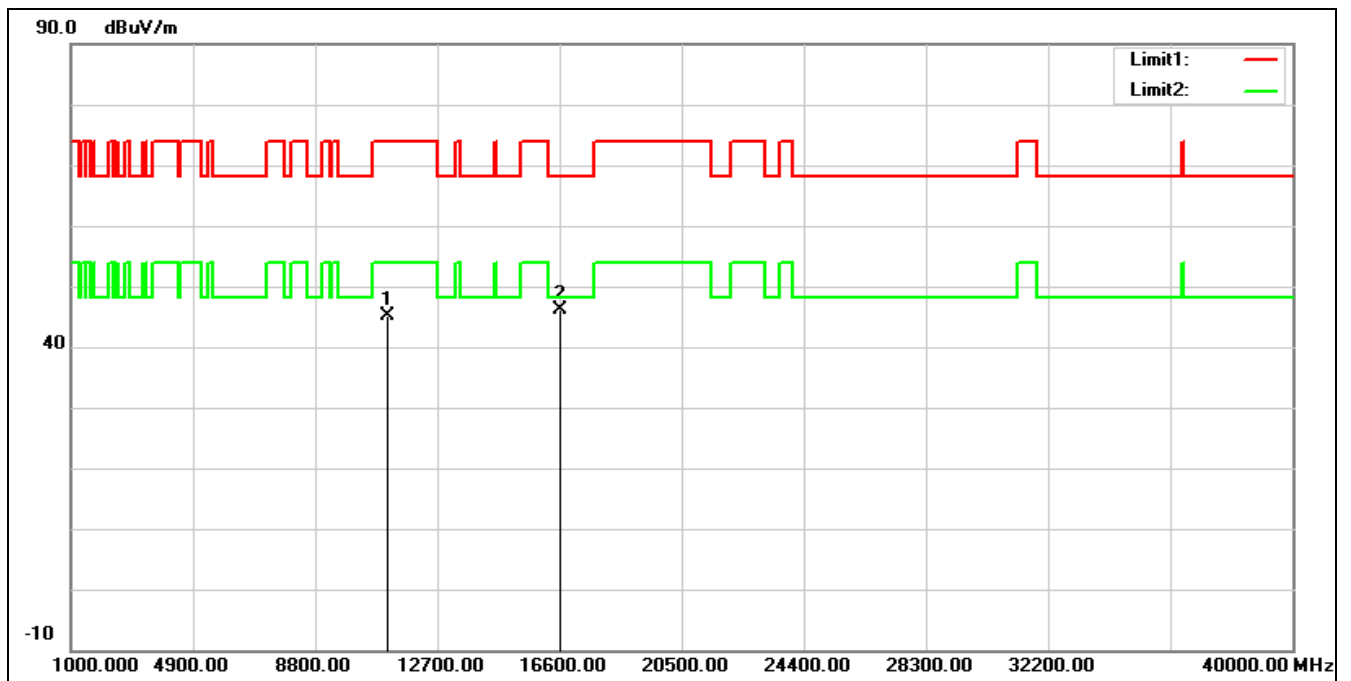


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	30.50	14.56	45.06	74.00	-28.94	peak
2*	16650.000	28.36	17.73	46.09	68.20	-22.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

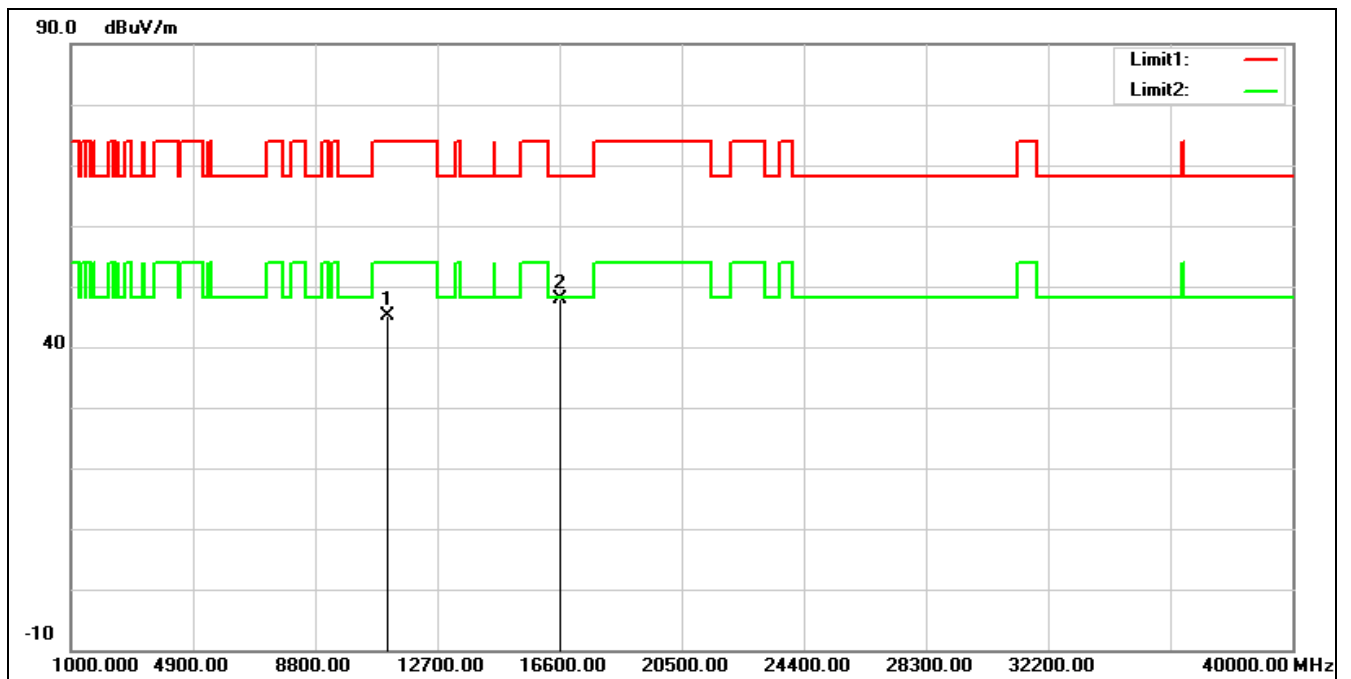


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	30.57	14.56	45.13	74.00	-28.87	peak
2*	16650.000	30.08	17.73	47.81	68.20	-20.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5670 MHz		
Remark:			

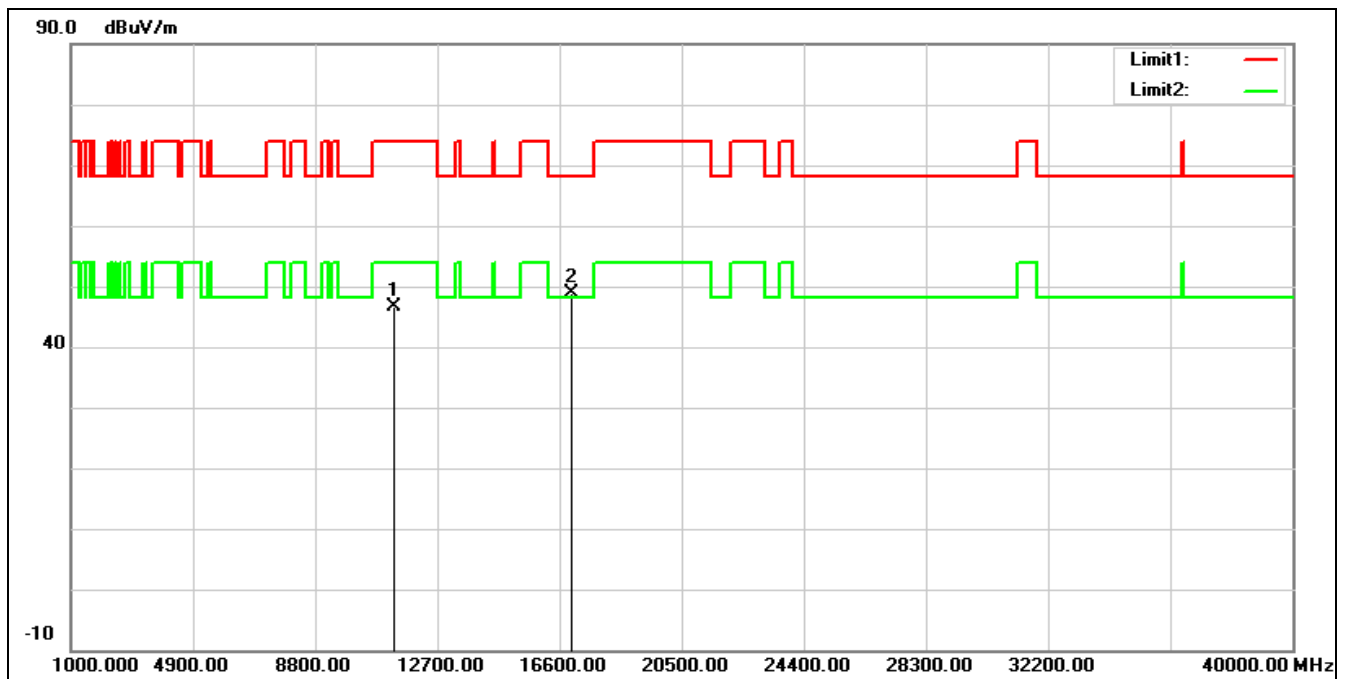


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	32.20	14.50	46.70	74.00	-27.30	peak
2*	17010.000	28.92	20.06	48.98	68.20	-19.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5670 MHz		
Remark:			

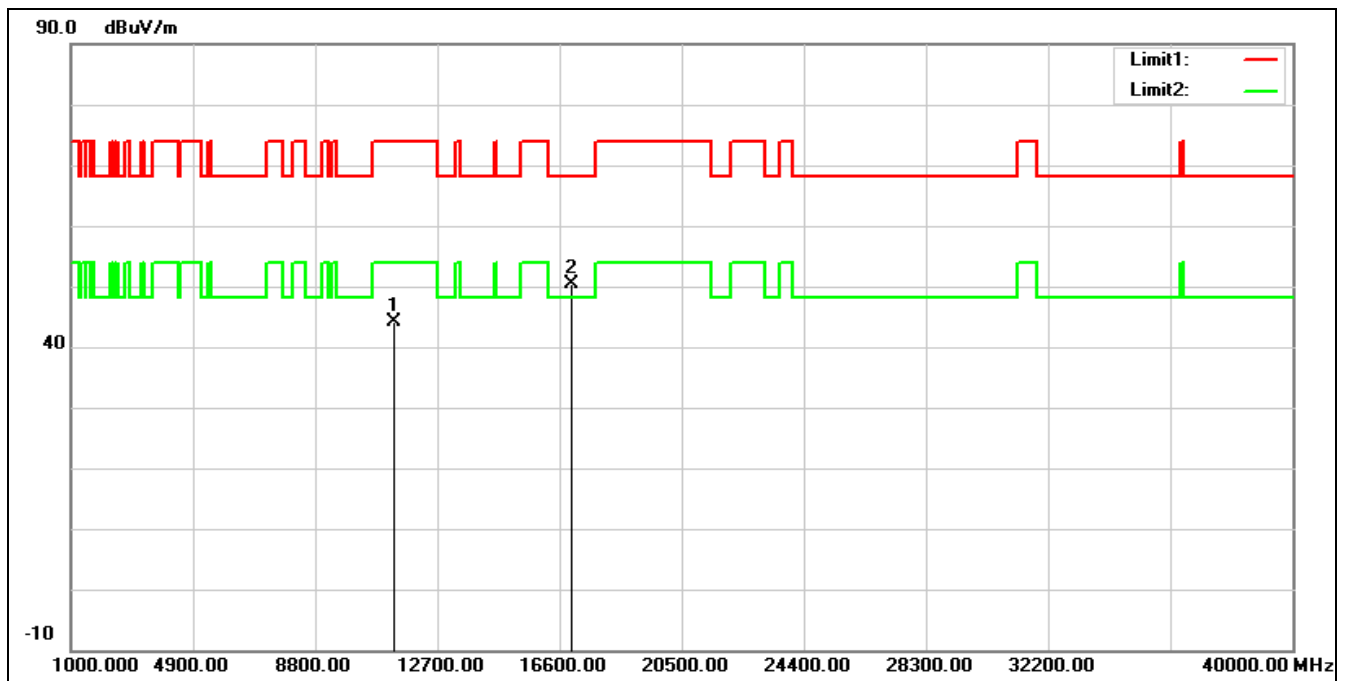


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	29.64	14.50	44.14	74.00	-29.86	peak
2*	17010.000	30.35	20.06	50.41	68.20	-17.79	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5710 MHz
Remark:

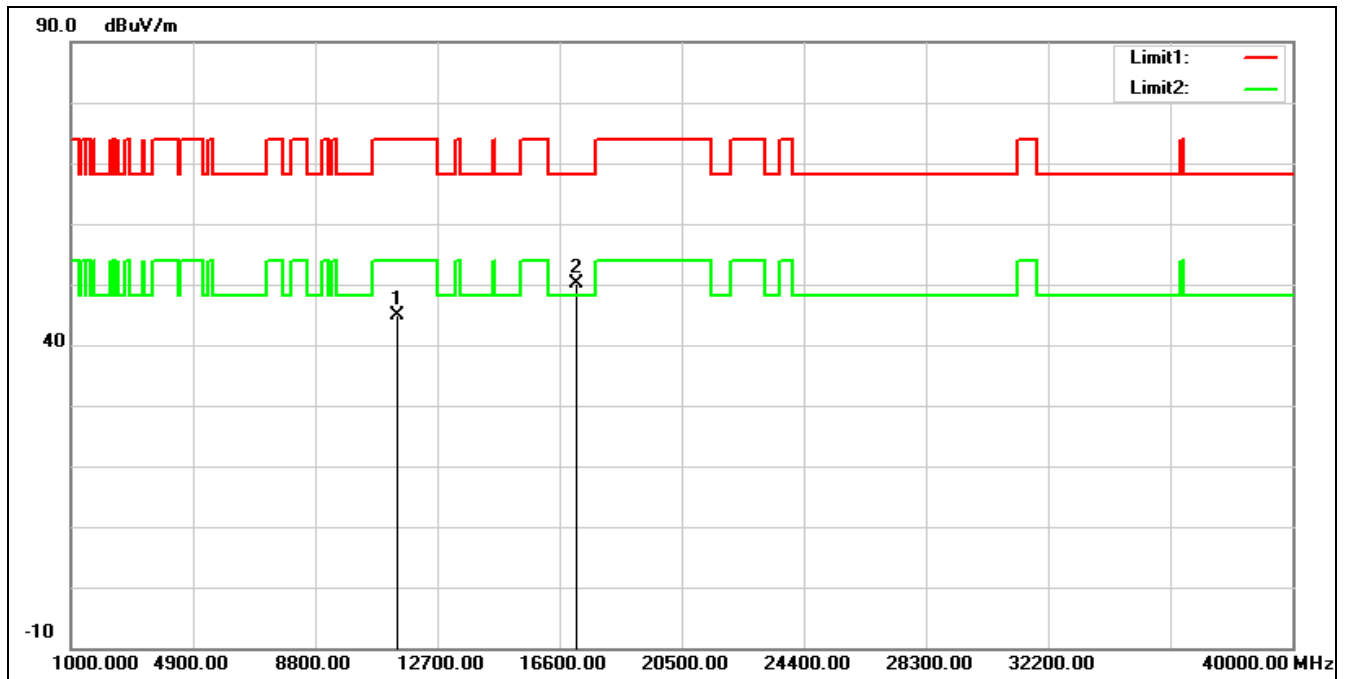

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	30.09	14.75	44.84	74.00	-29.16	peak
2*	17130.000	29.38	20.77	50.15	68.20	-18.05	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5710 MHz
Remark:

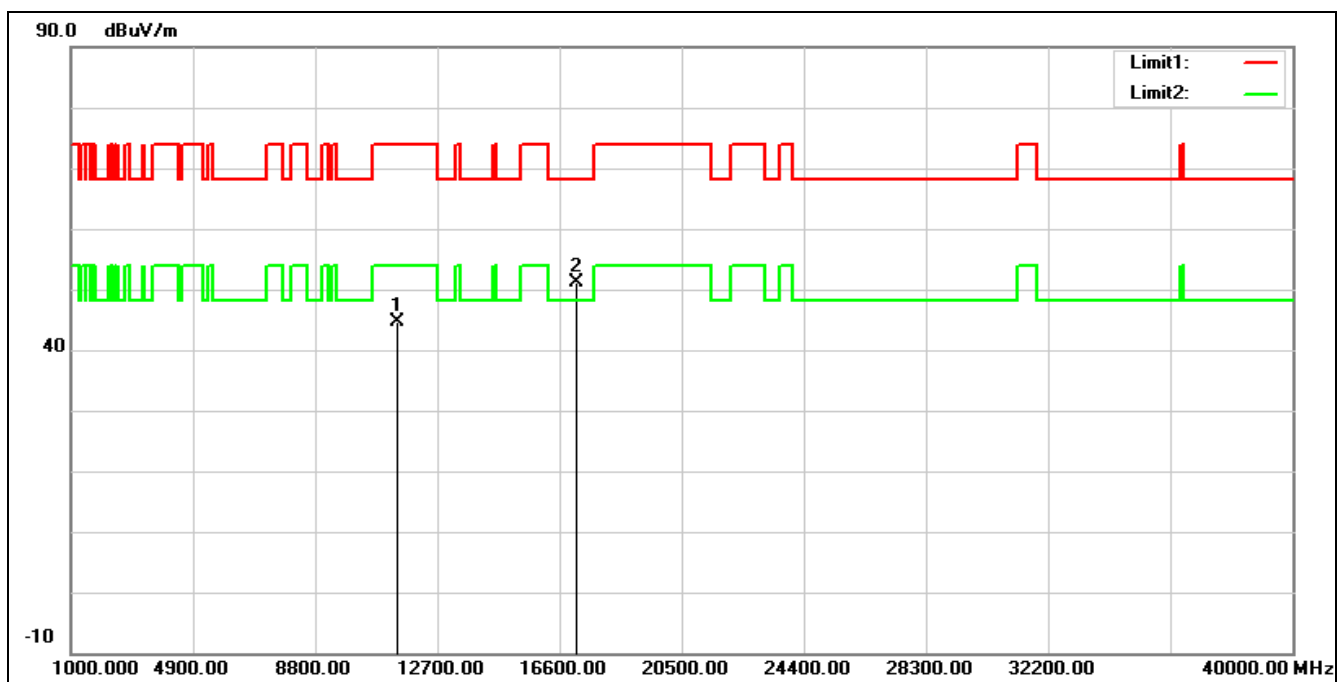


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	29.95	14.75	44.70	74.00	-29.30	peak
2*	17130.000	30.26	20.77	51.03	68.20	-17.17	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5755 MHz

Remark:

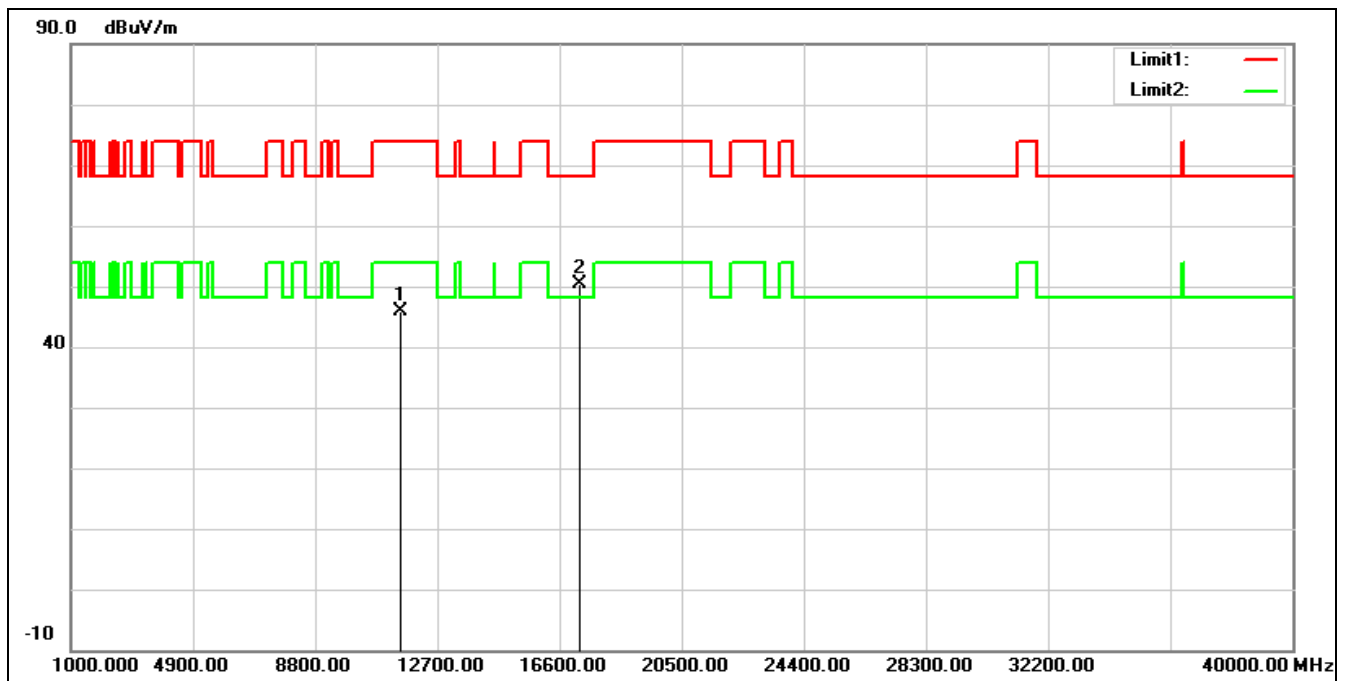


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	30.80	15.09	45.89	74.00	-28.11	peak
2*	17265.000	28.68	21.79	50.47	68.20	-17.73	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5755 MHz
Remark:

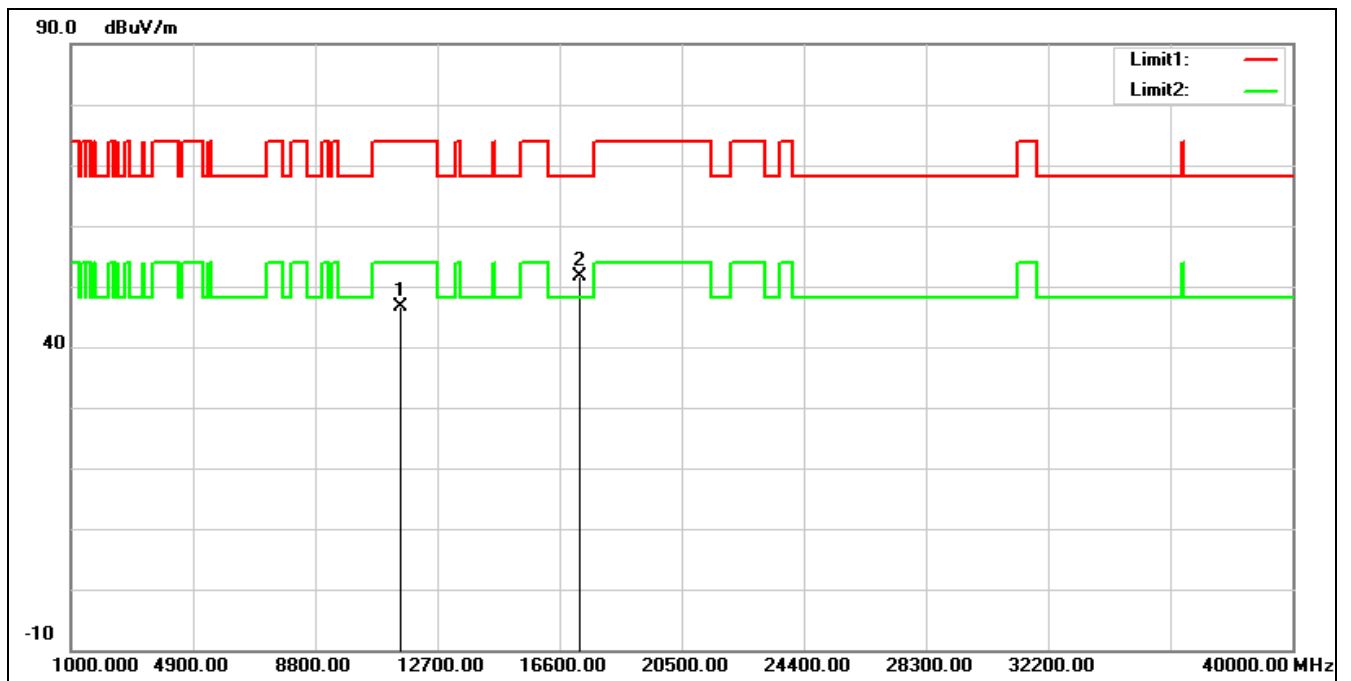

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.66	15.09	46.75	74.00	-27.25	peak
2*	17265.000	29.90	21.79	51.69	68.20	-16.51	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5795 MHz
Remark:

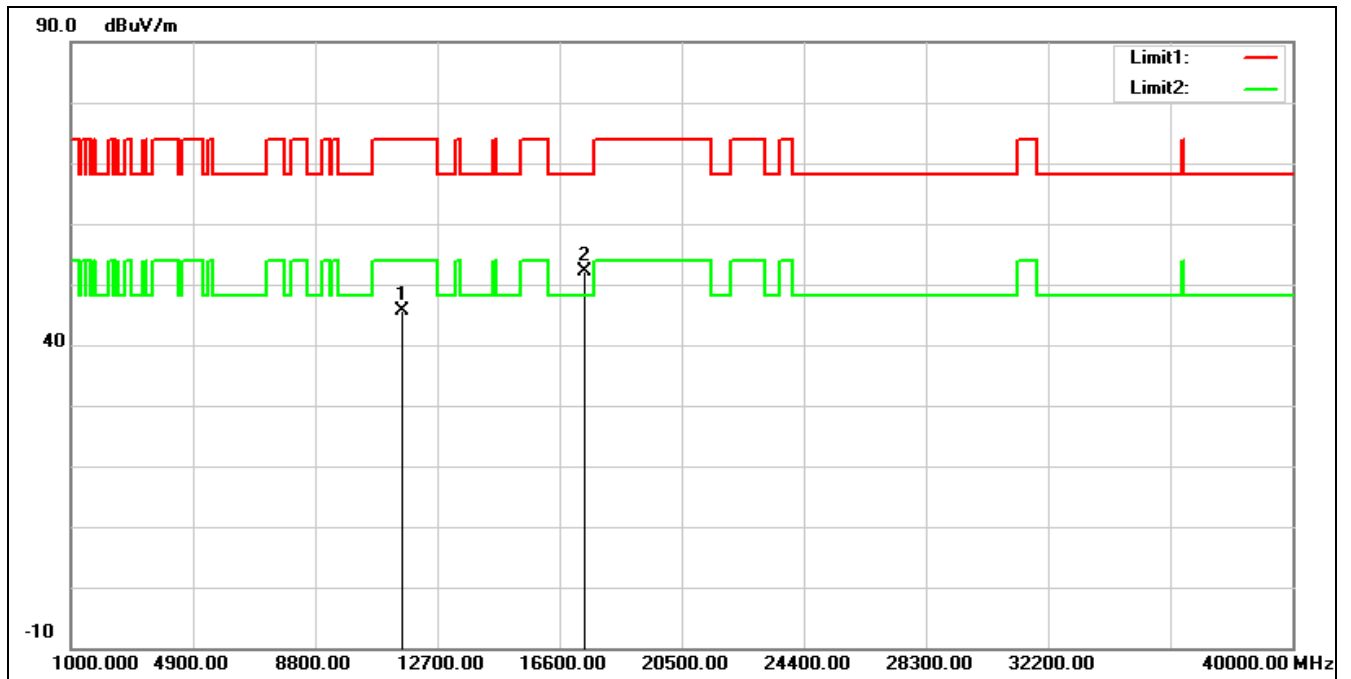


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	30.88	14.76	45.64	74.00	-28.36	peak
2*	17385.000	29.71	22.48	52.19	68.20	-16.01	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5795 MHz

Remark:

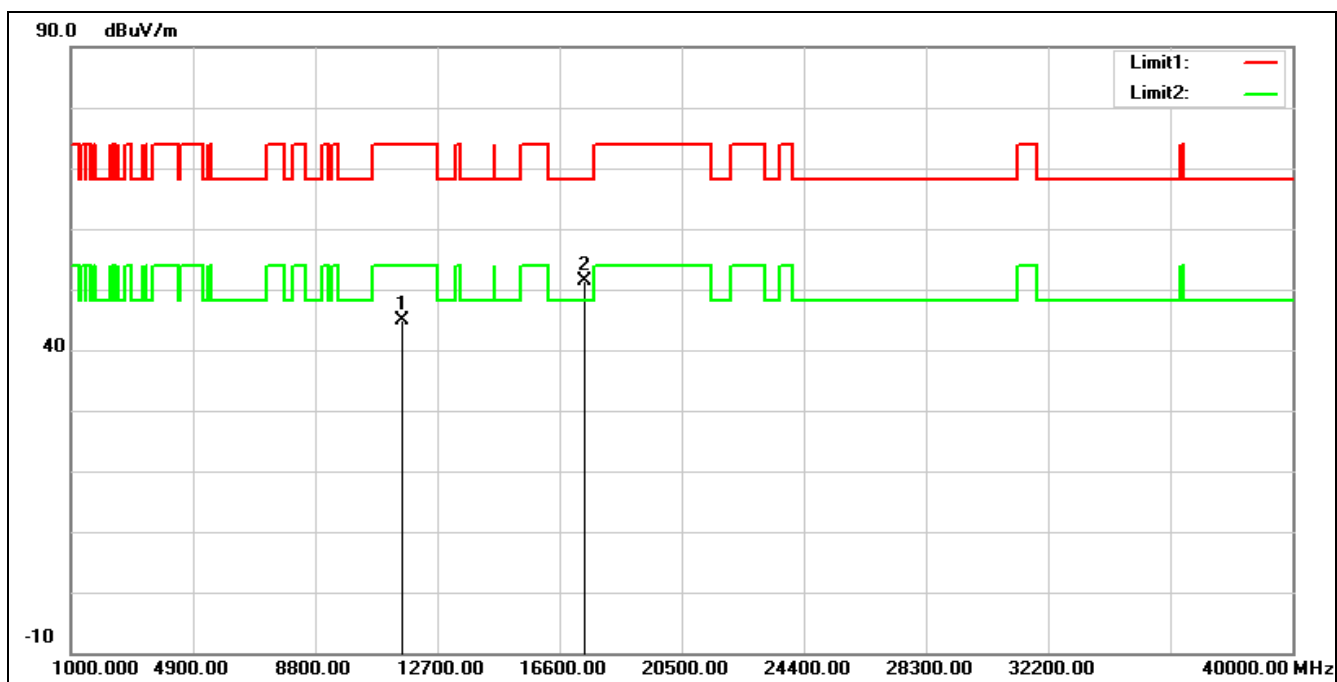


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	30.11	14.76	44.87	74.00	-29.13	peak
2*	17385.000	28.93	22.48	51.41	68.20	-16.79	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT80 5210 MHz

Remark:

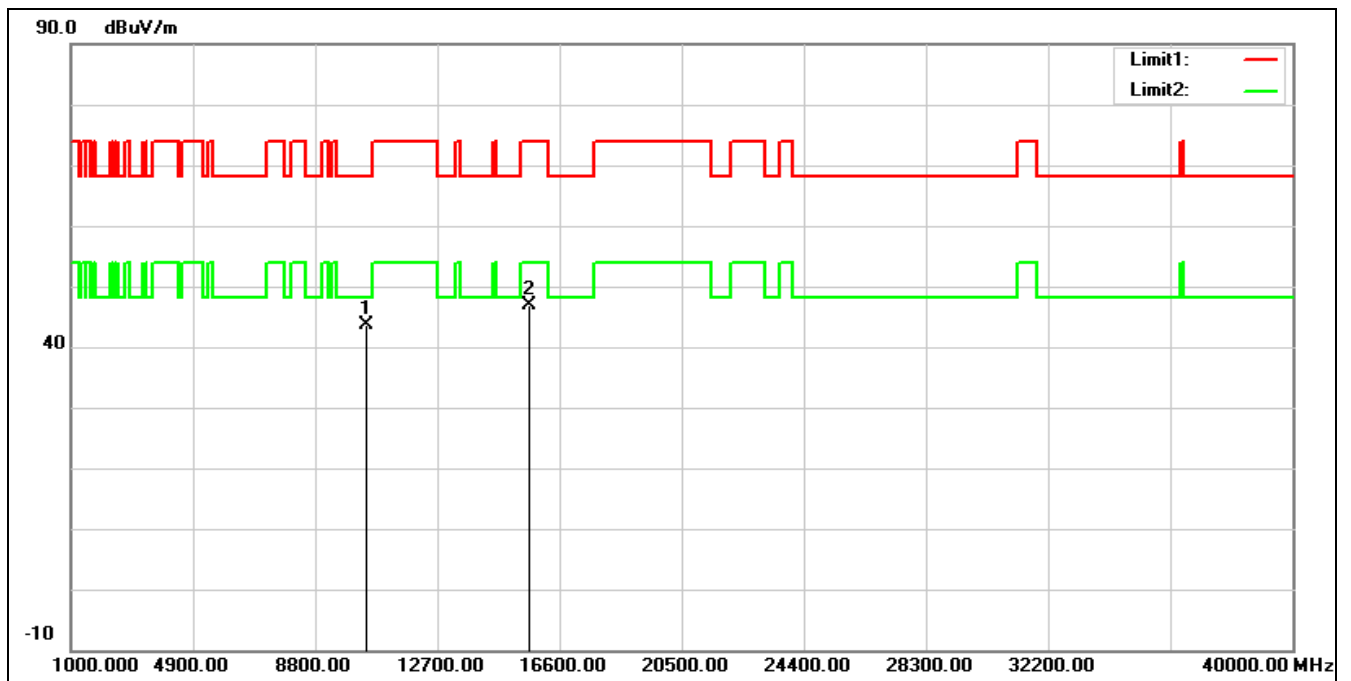


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	30.04	13.53	43.57	68.20	-24.63	peak
2	15630.000	30.22	16.64	46.86	74.00	-27.14	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT80 5210 MHz

Remark:

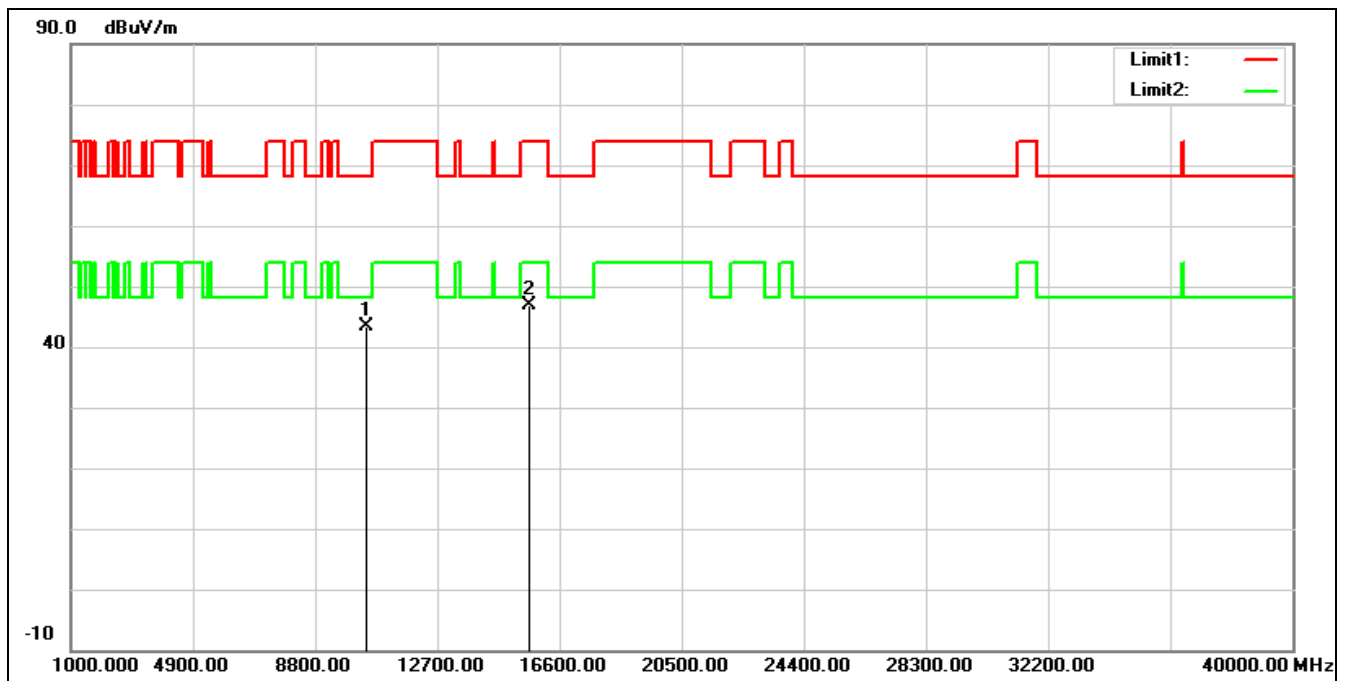


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	29.96	13.53	43.49	68.20	-24.71	peak
2	15630.000	30.25	16.64	46.89	74.00	-27.11	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT80 5290 MHz

Remark:

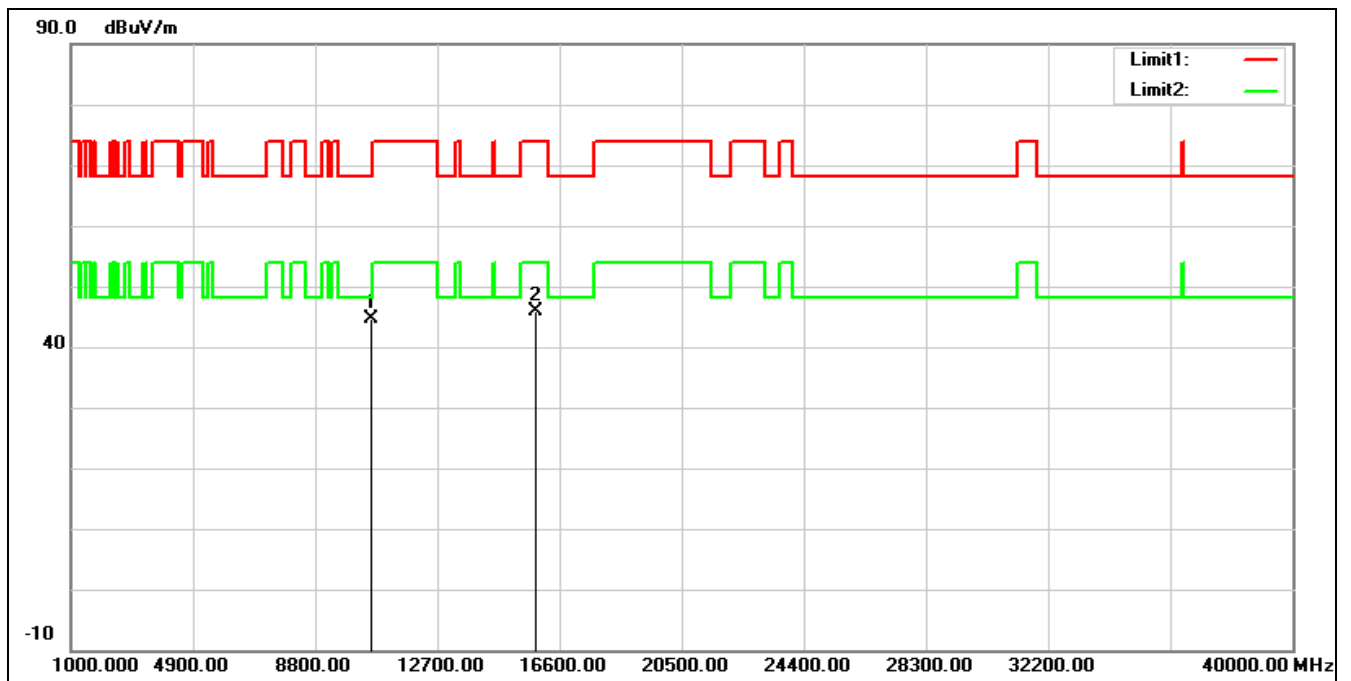


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	31.02	13.63	44.65	68.20	-23.55	peak
2	15870.000	29.56	16.31	45.87	74.00	-28.13	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT80 5290 MHz
Remark:

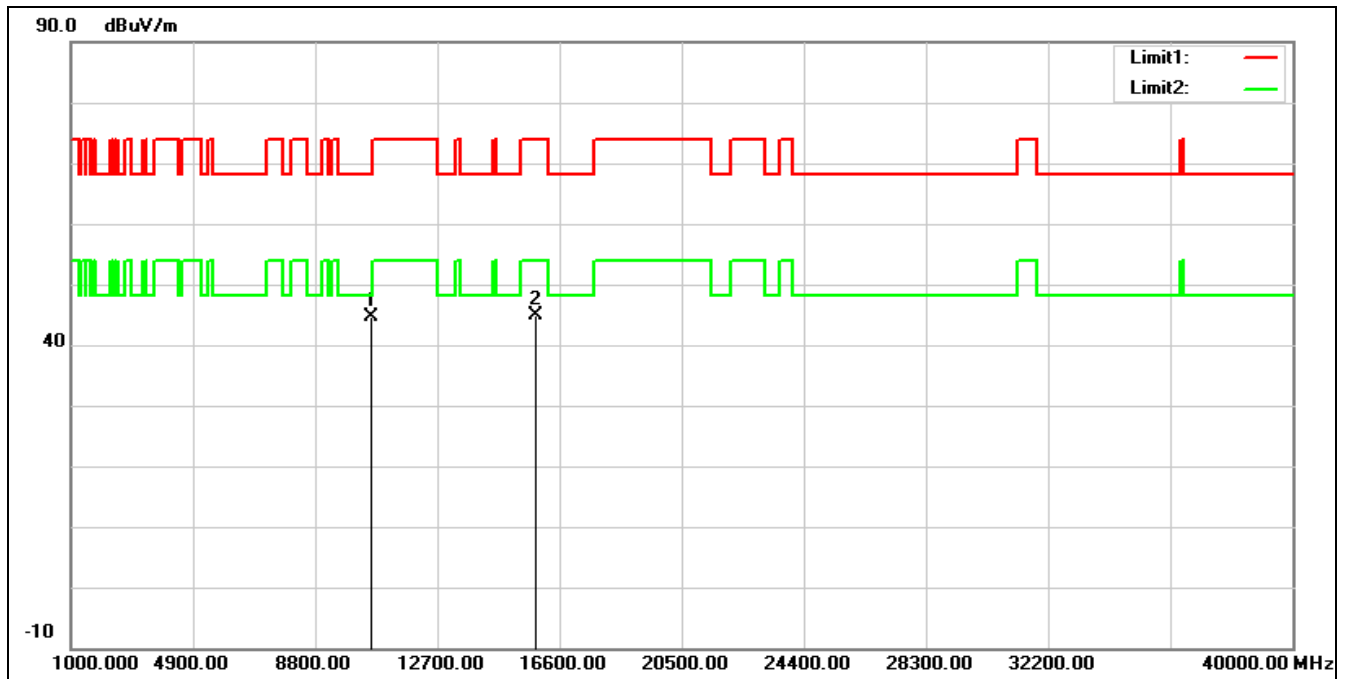

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	31.10	13.63	44.73	68.20	-23.47	peak
2	15870.000	28.57	16.31	44.88	74.00	-29.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5530 MHz		
Remark:			

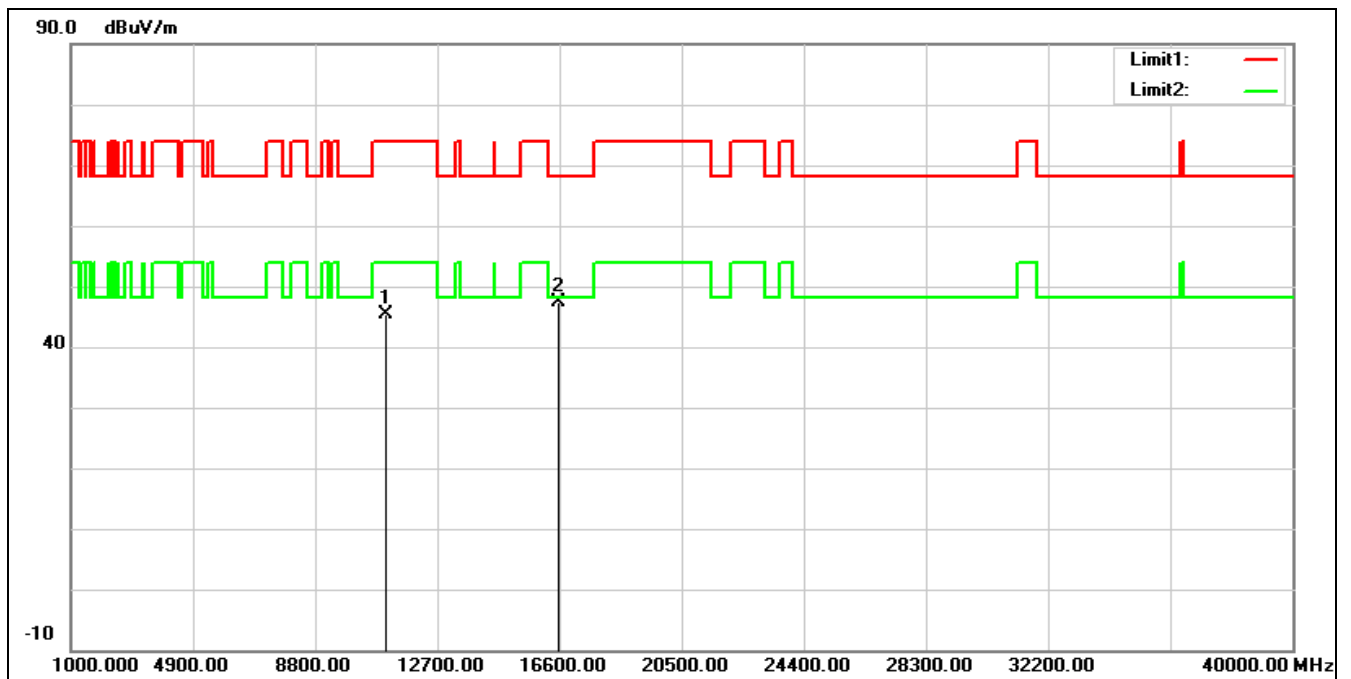


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	30.81	14.46	45.27	74.00	-28.73	peak
2*	16590.000	30.05	17.34	47.39	68.20	-20.81	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5530 MHz

Remark:

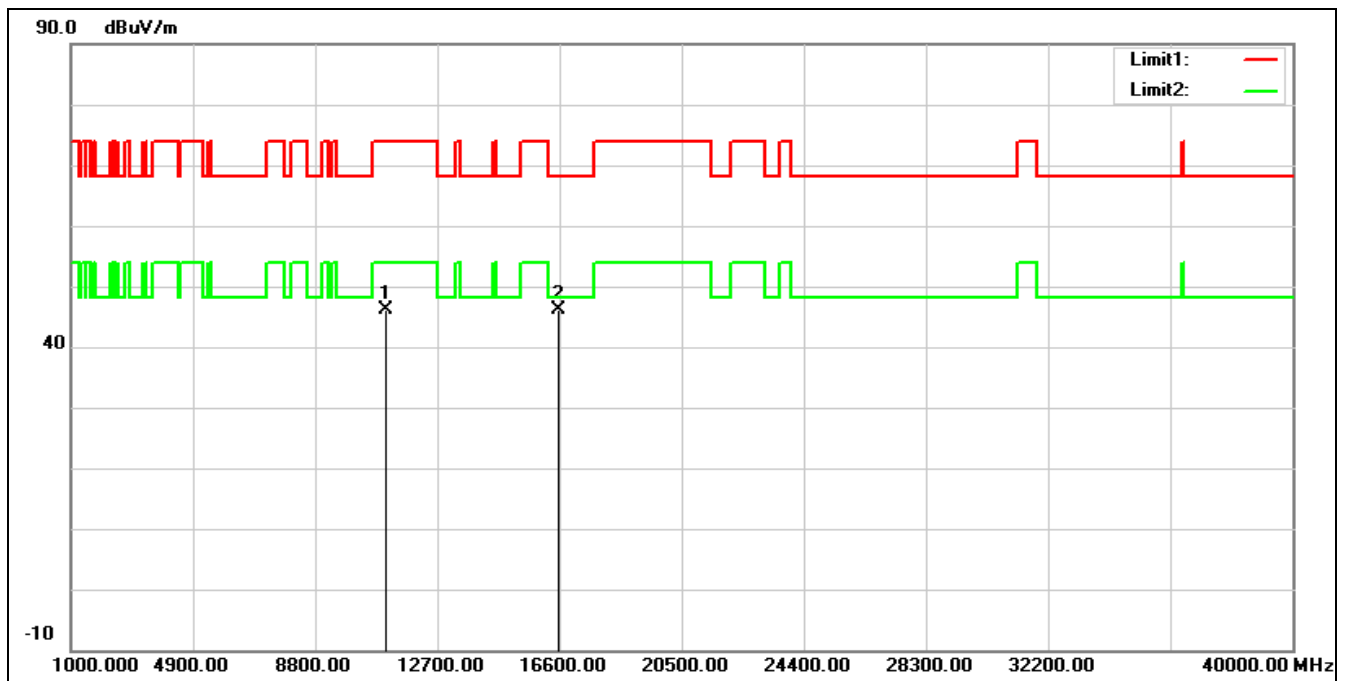


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	31.62	14.46	46.08	74.00	-27.92	peak
2*	16590.000	28.74	17.34	46.08	68.20	-22.12	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT80 5610 MHz
Remark:

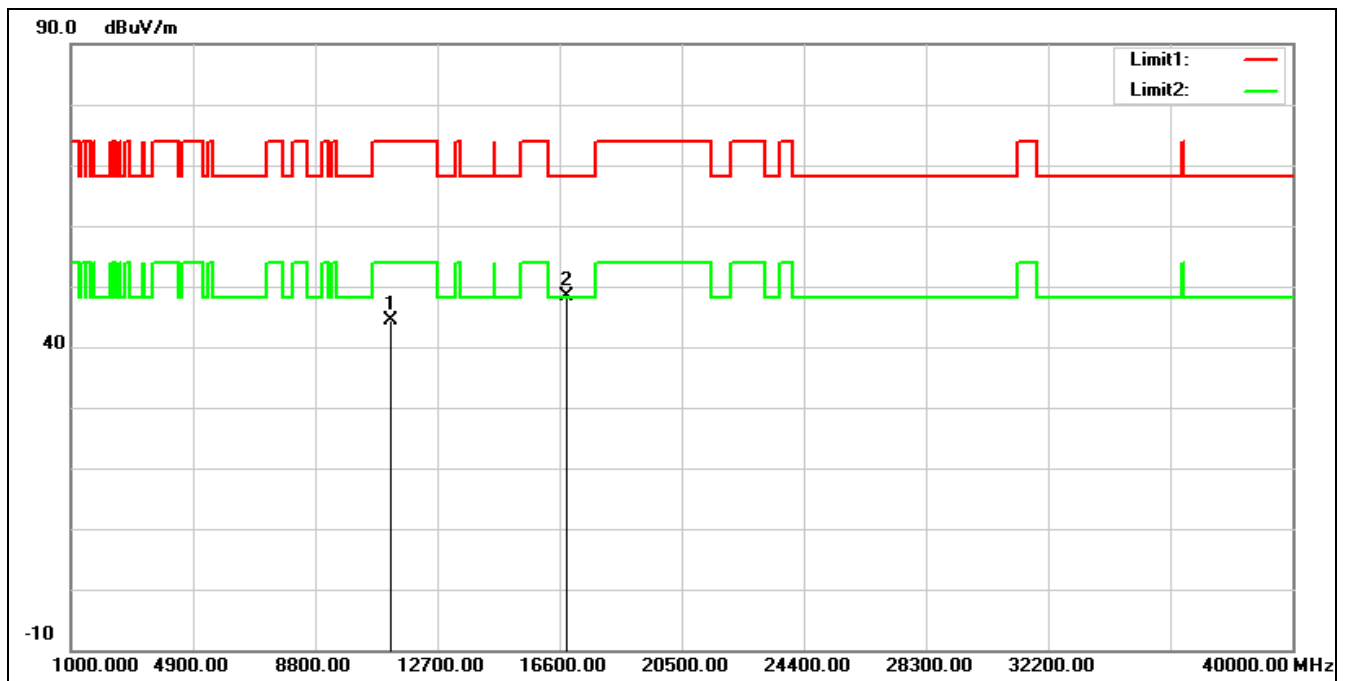


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	30.05	14.34	44.39	74.00	-29.61	peak
2*	16830.000	29.28	19.08	48.36	68.20	-19.84	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

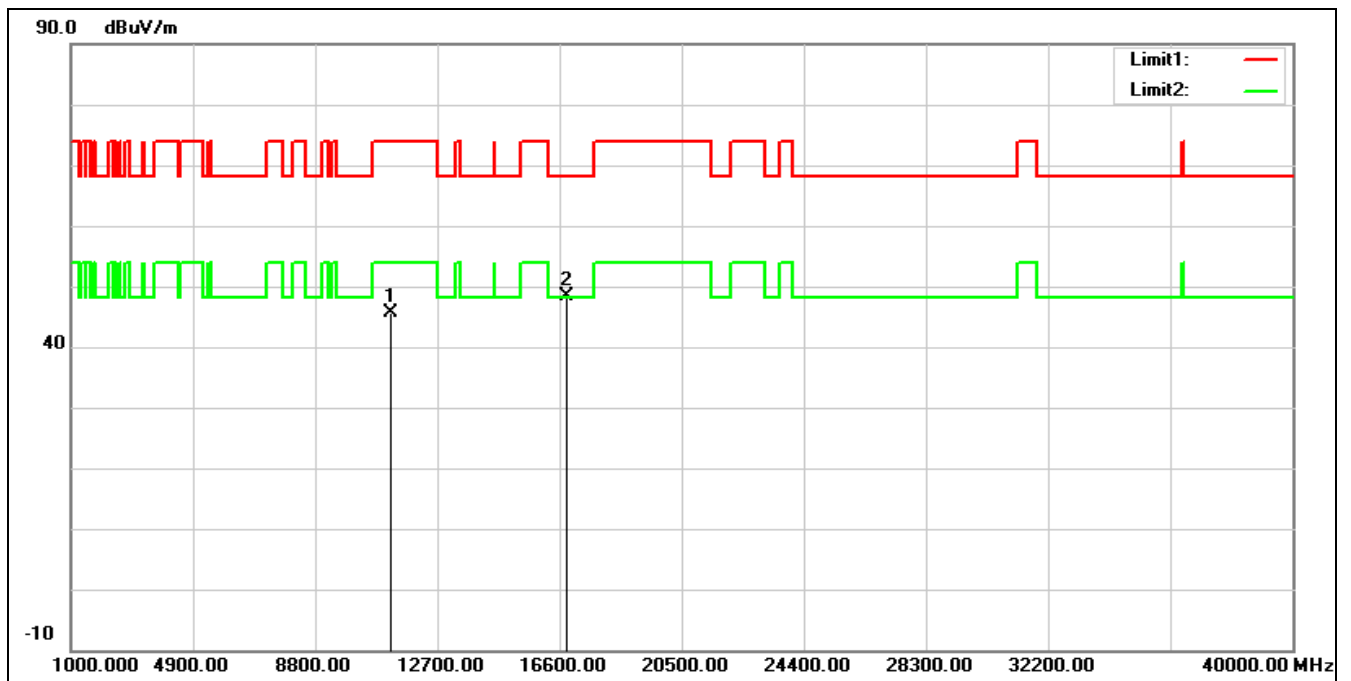

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	31.38	14.34	45.72	74.00	-28.28	peak
2*	16830.000	29.18	19.08	48.26	68.20	-19.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

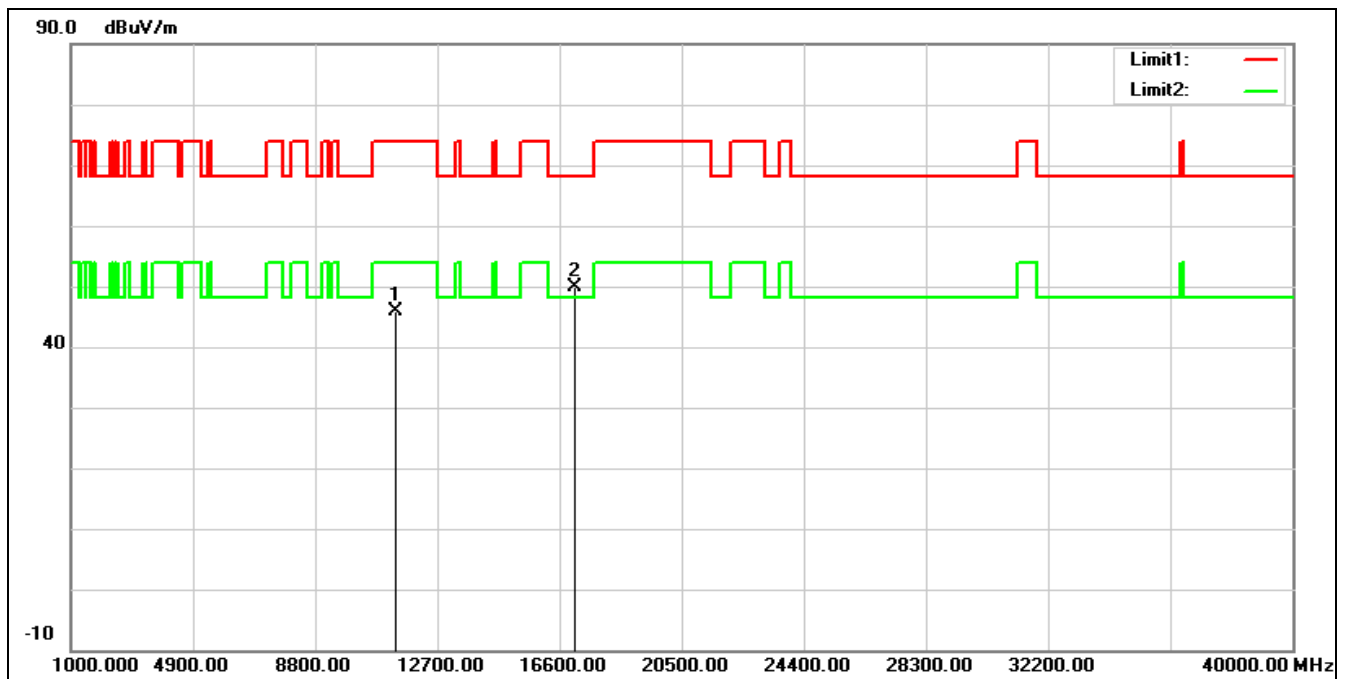


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	31.18	14.60	45.78	74.00	-28.22	peak
2*	17070.000	29.59	20.40	49.99	68.20	-18.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5690 MHz

Remark:

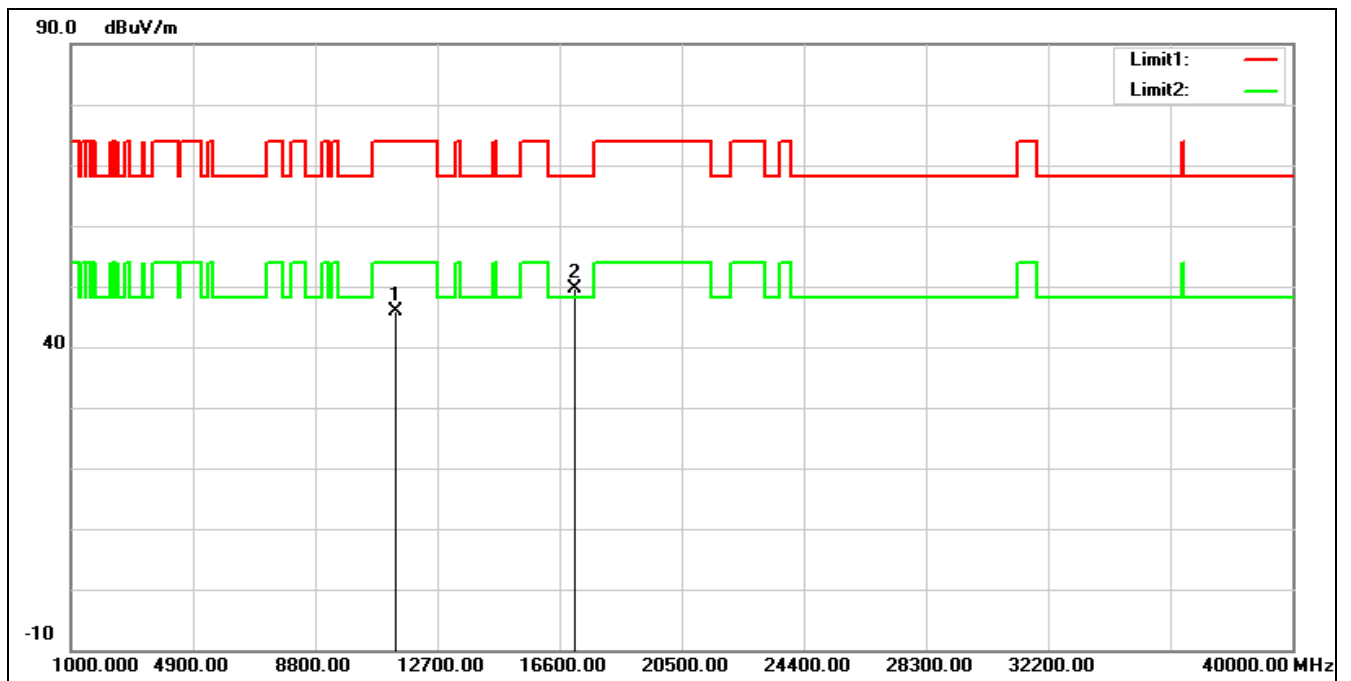

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	31.26	14.60	45.86	74.00	-28.14	peak
2*	17070.000	29.27	20.40	49.67	68.20	-18.53	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT80 5775 MHz
Remark:

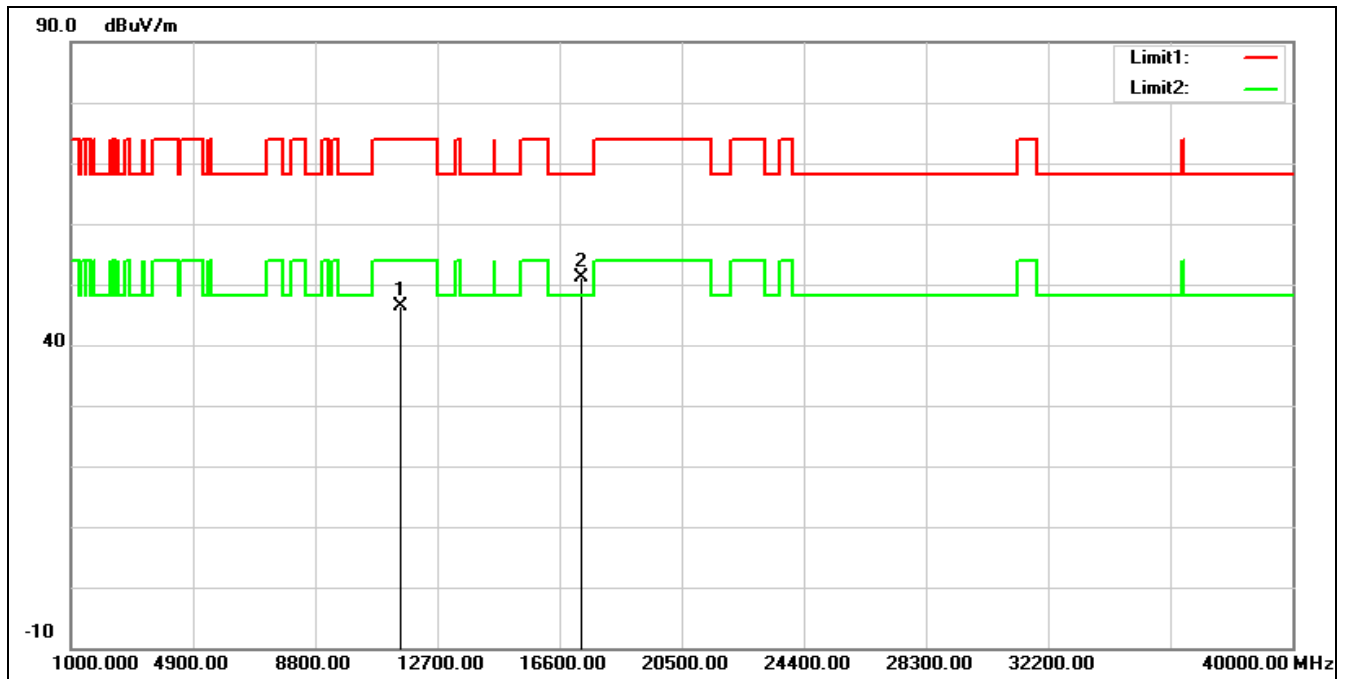


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	31.54	14.92	46.46	74.00	-27.54	peak
2*	17325.000	28.82	22.20	51.02	68.20	-17.18	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT80 5775 MHz

Remark:

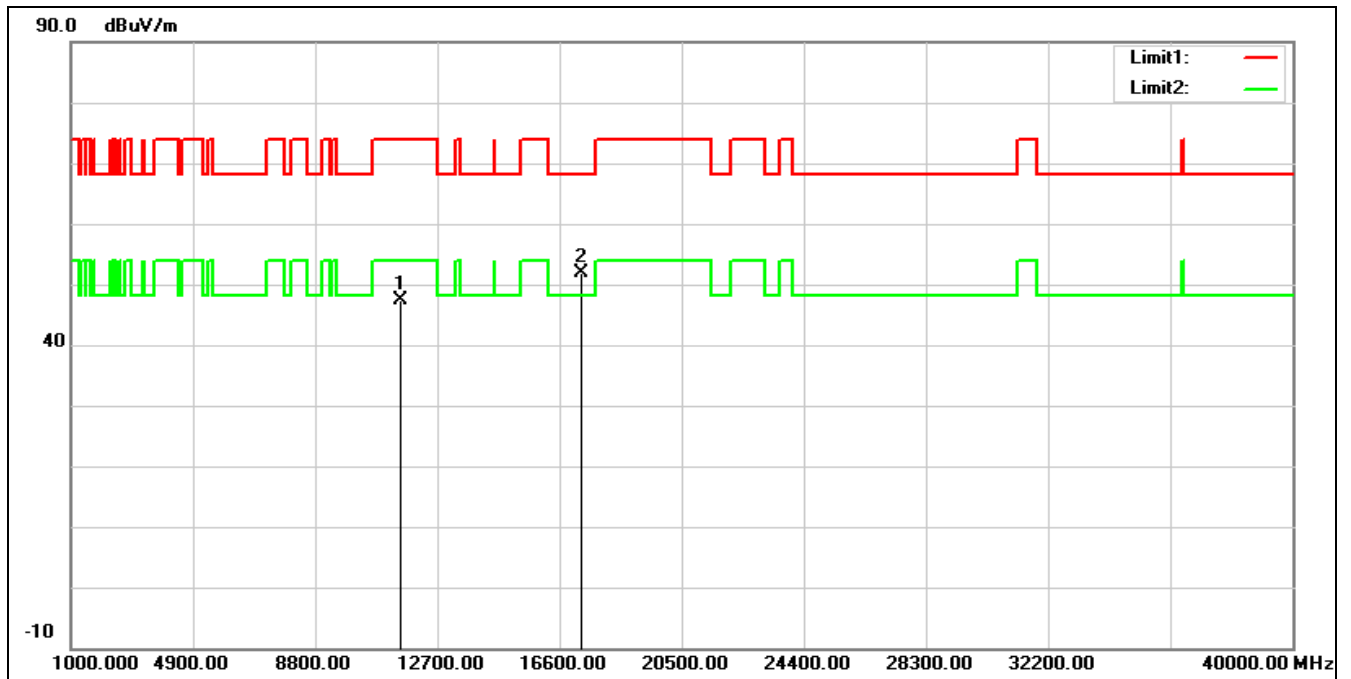


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	32.44	14.92	47.36	74.00	-26.64	peak
2*	17325.000	29.79	22.20	51.99	68.20	-16.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT160 5250 MHz

Remark:

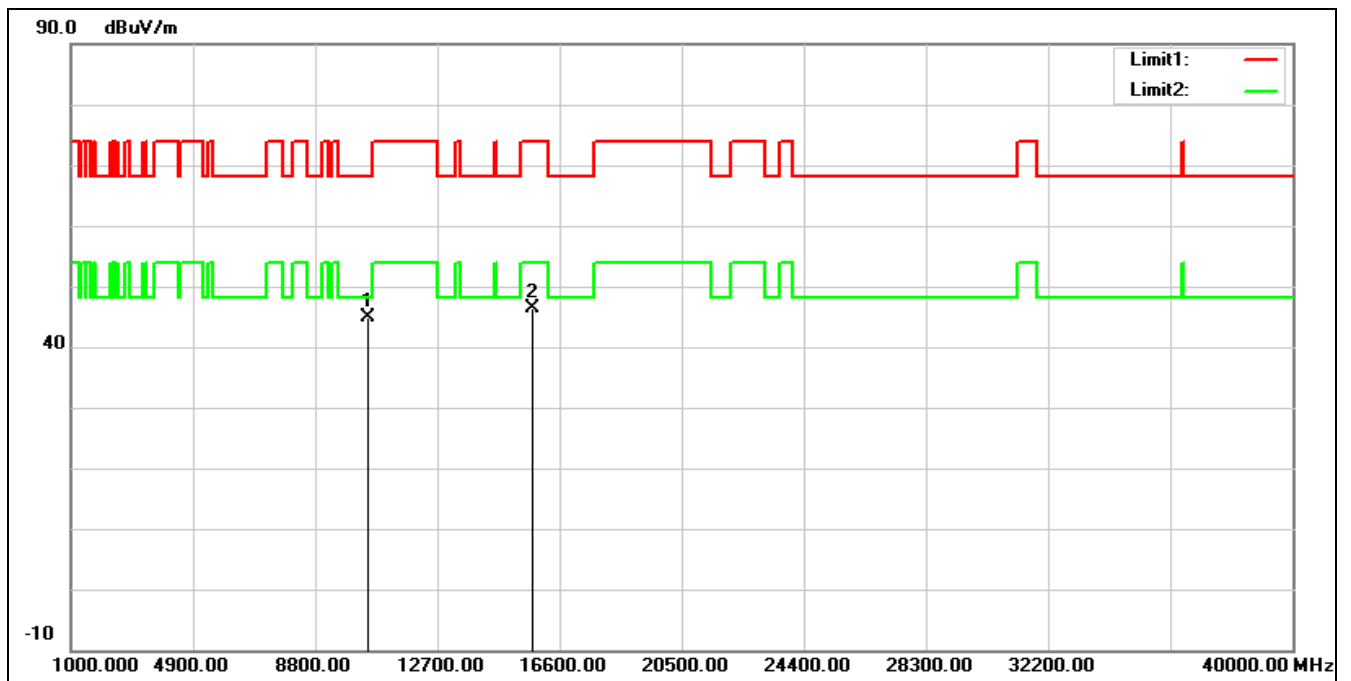


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	31.32	13.60	44.92	68.20	-23.28	peak
2	15750.000	29.80	16.55	46.35	74.00	-27.65	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT160 5250 MHz

Remark:

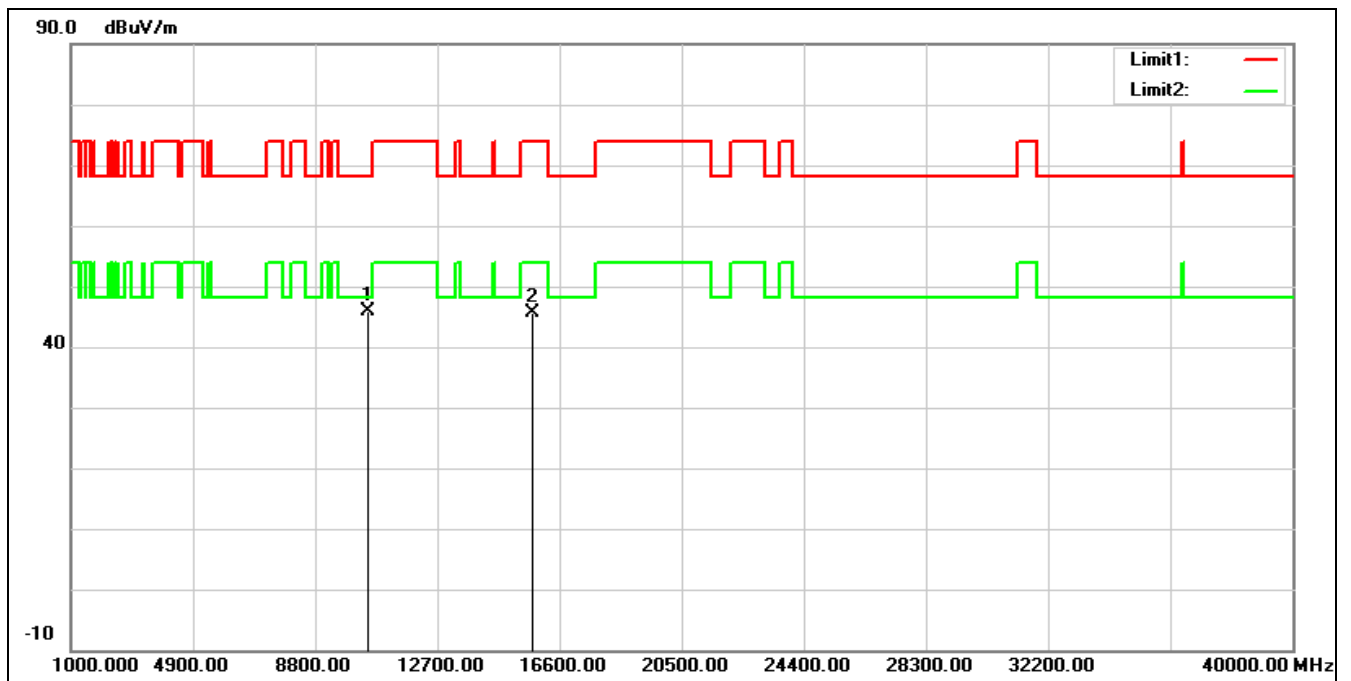

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	32.40	13.60	46.00	68.20	-22.20	peak
2	15750.000	29.19	16.55	45.74	74.00	-28.26	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT160 5570 MHz
Remark:

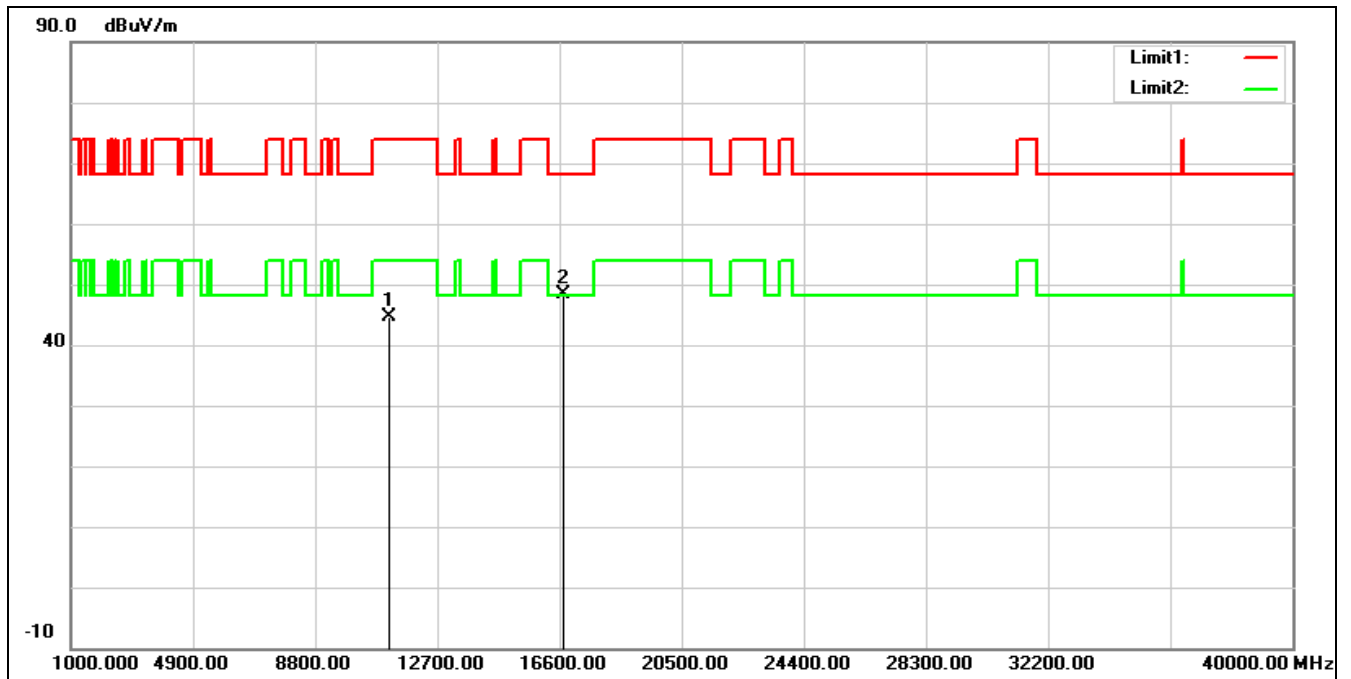


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	30.08	14.47	44.55	74.00	-29.45	peak
2*	16710.000	30.26	18.12	48.38	68.20	-19.82	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT160 5570 MHz

Remark:

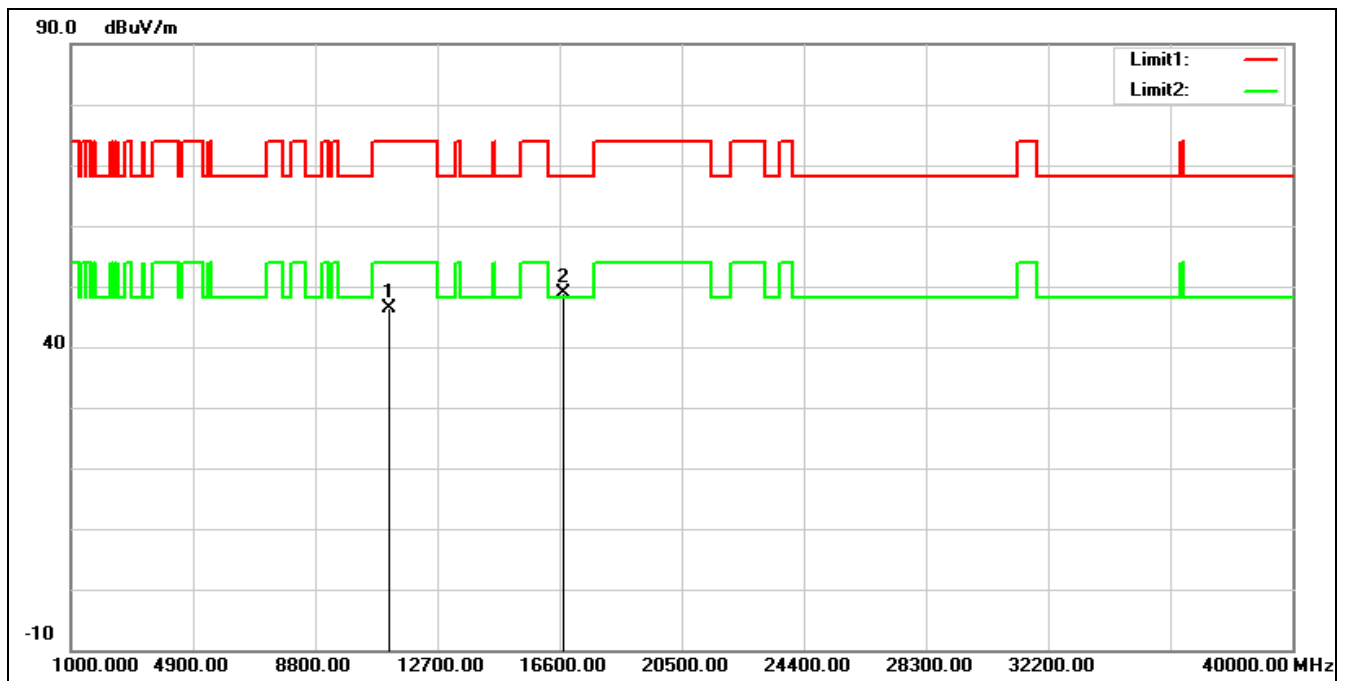


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	31.82	14.47	46.29	74.00	-27.71	peak
2*	16710.000	30.87	18.12	48.99	68.20	-19.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5180 MHz

Remark:

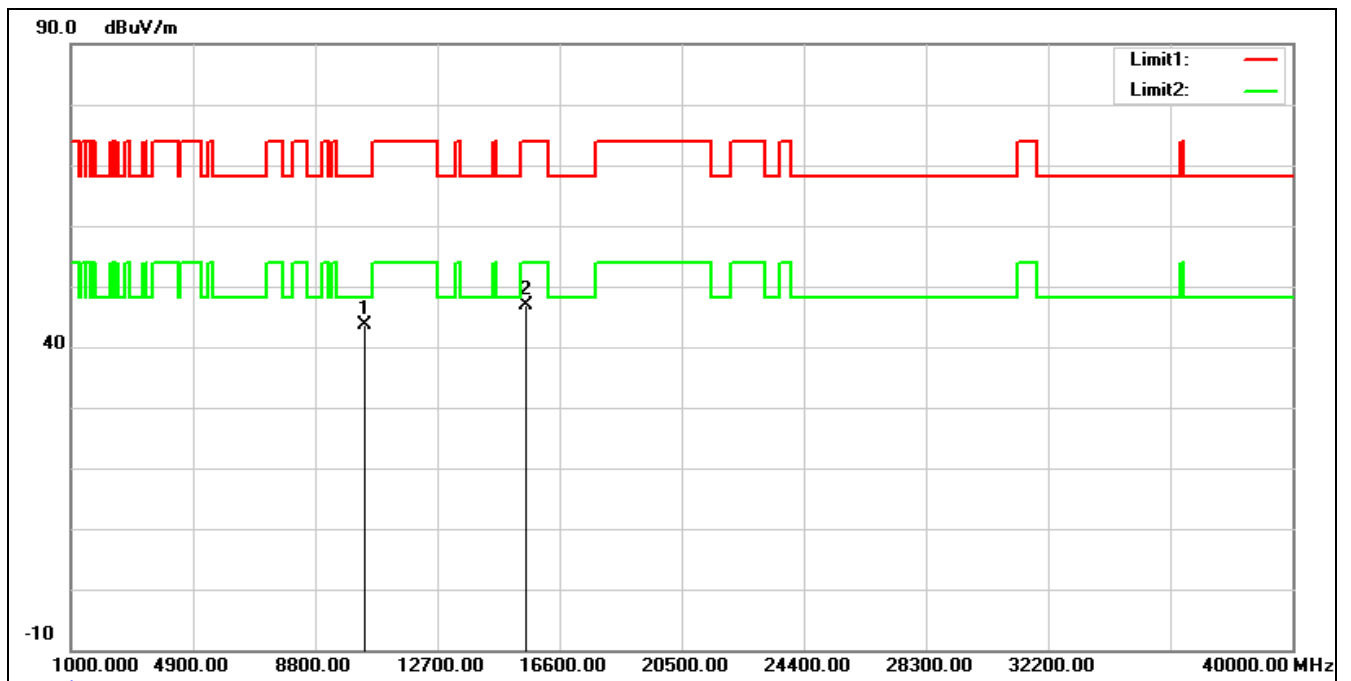


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	30.25	13.36	43.61	68.20	-24.59	peak
2	15540.000	30.08	16.77	46.85	74.00	-27.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5180 MHz		
Remark:			

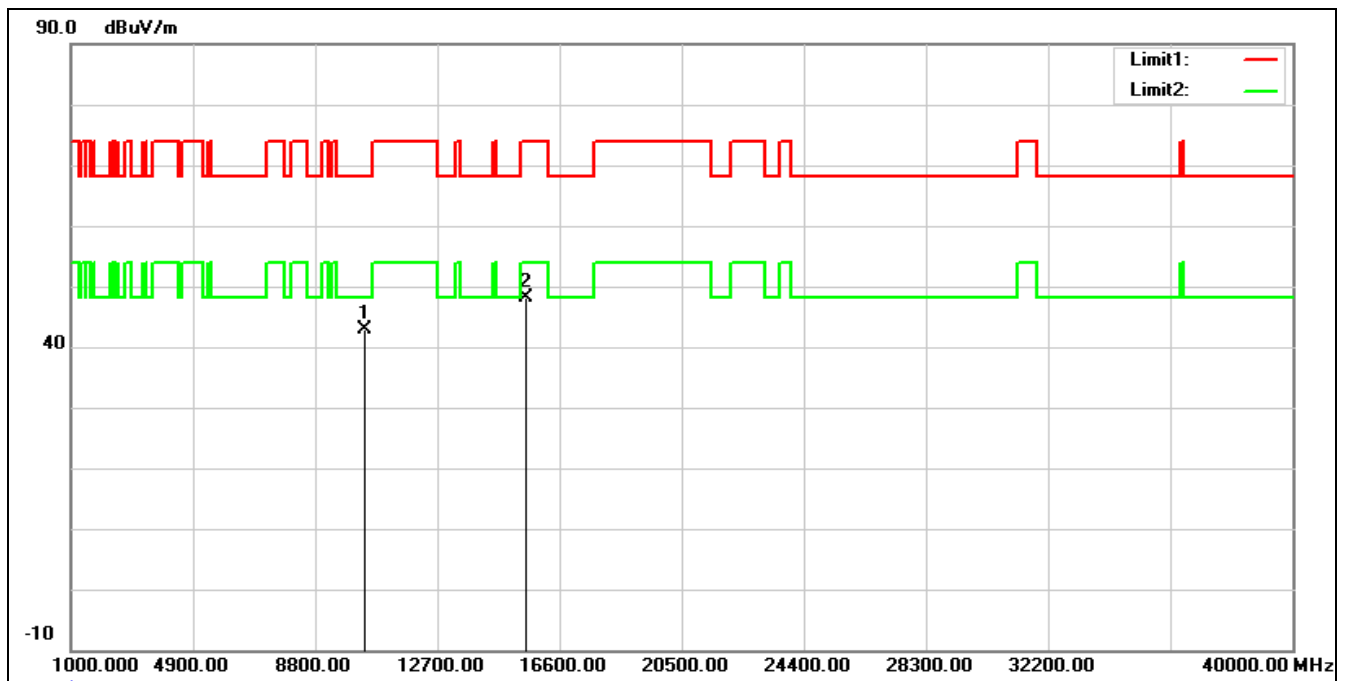

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10360.000	29.60	13.36	42.96	68.20	-25.24	peak
2	15540.000	31.47	16.77	48.24	74.00	-25.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

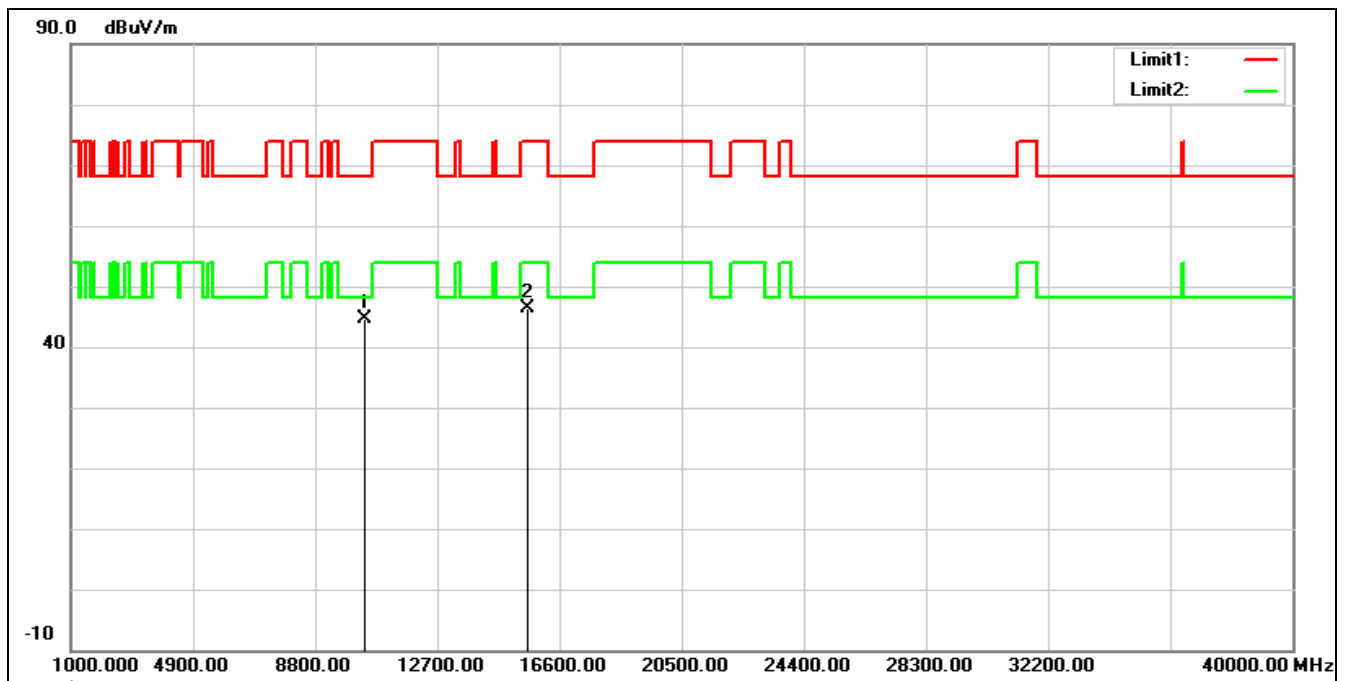


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	31.03	13.51	44.54	68.20	-23.66	peak
2	15600.000	29.82	16.66	46.48	74.00	-27.52	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5200 MHz

Remark:

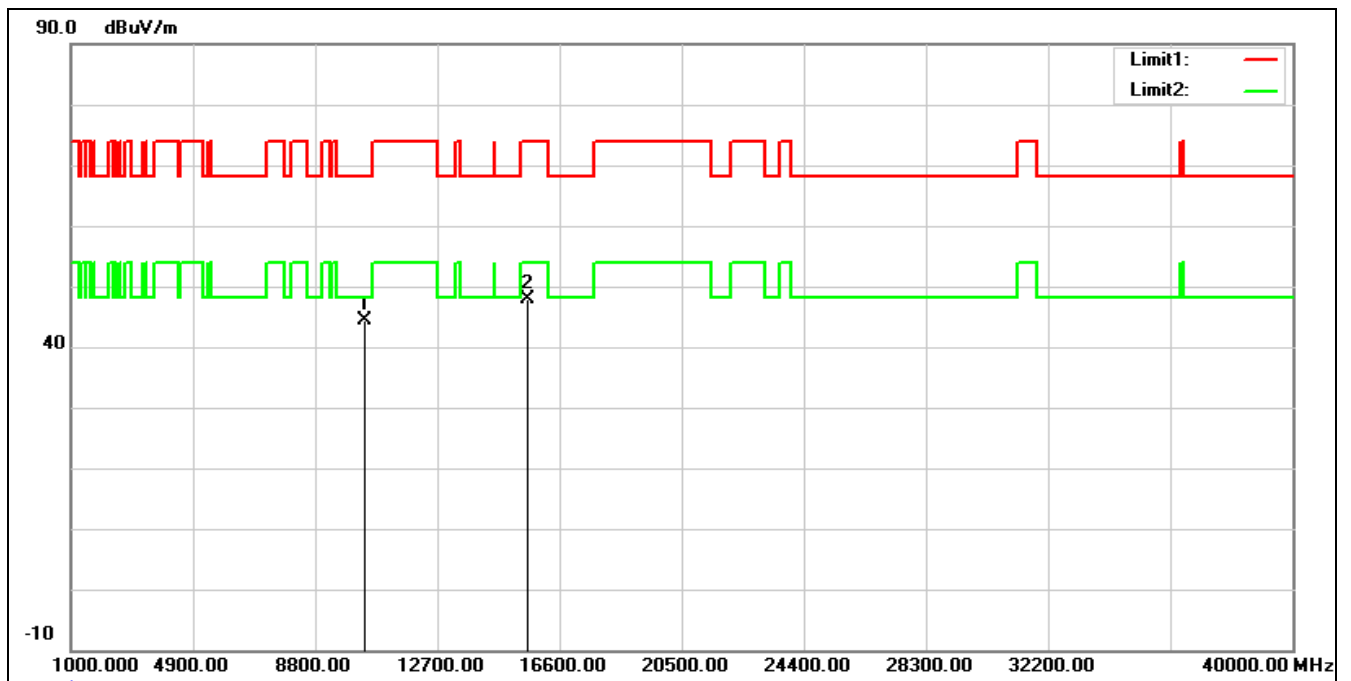


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10400.000	30.85	13.51	44.36	68.20	-23.84	peak
2	15600.000	31.24	16.66	47.90	74.00	-26.10	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5240 MHz
Remark:

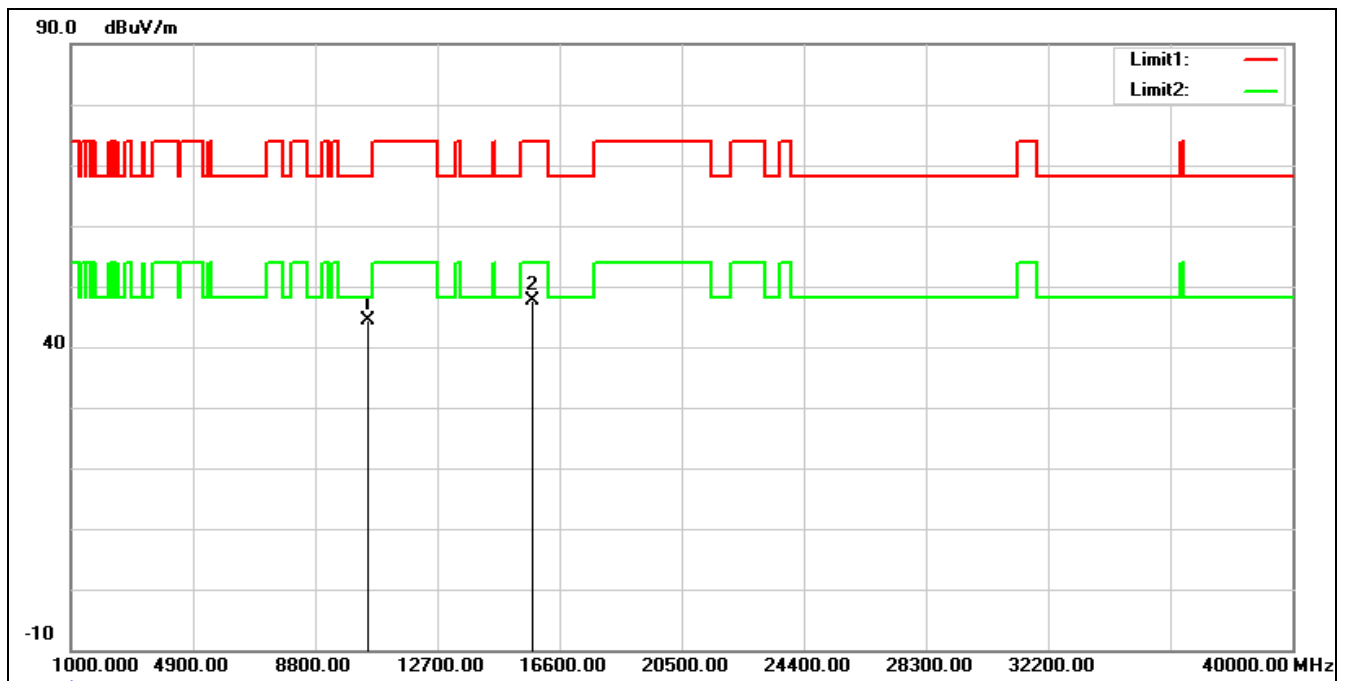


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	30.74	13.58	44.32	68.20	-23.88	peak
2	15720.000	31.09	16.57	47.66	74.00	-26.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5240 MHz		
Remark:			

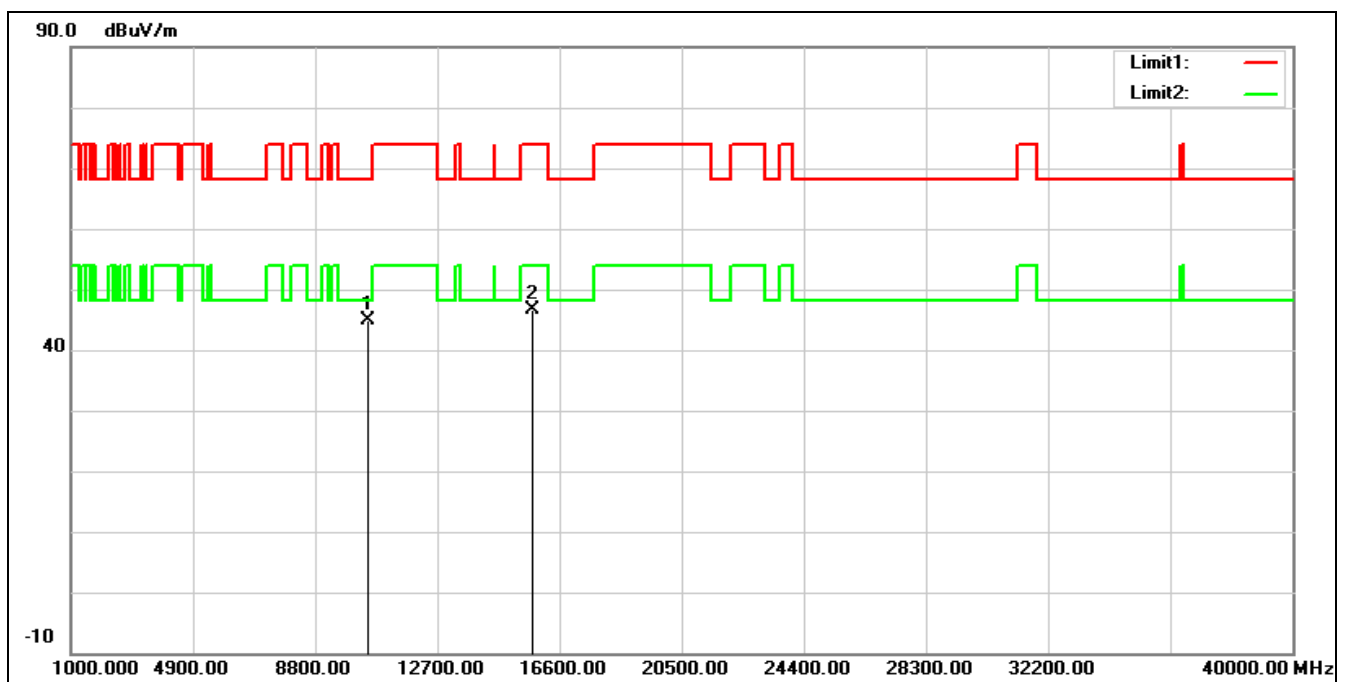

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10480.000	31.19	13.58	44.77	68.20	-23.43	peak
2	15720.000	30.01	16.57	46.58	74.00	-27.42	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5260 MHz
Remark:

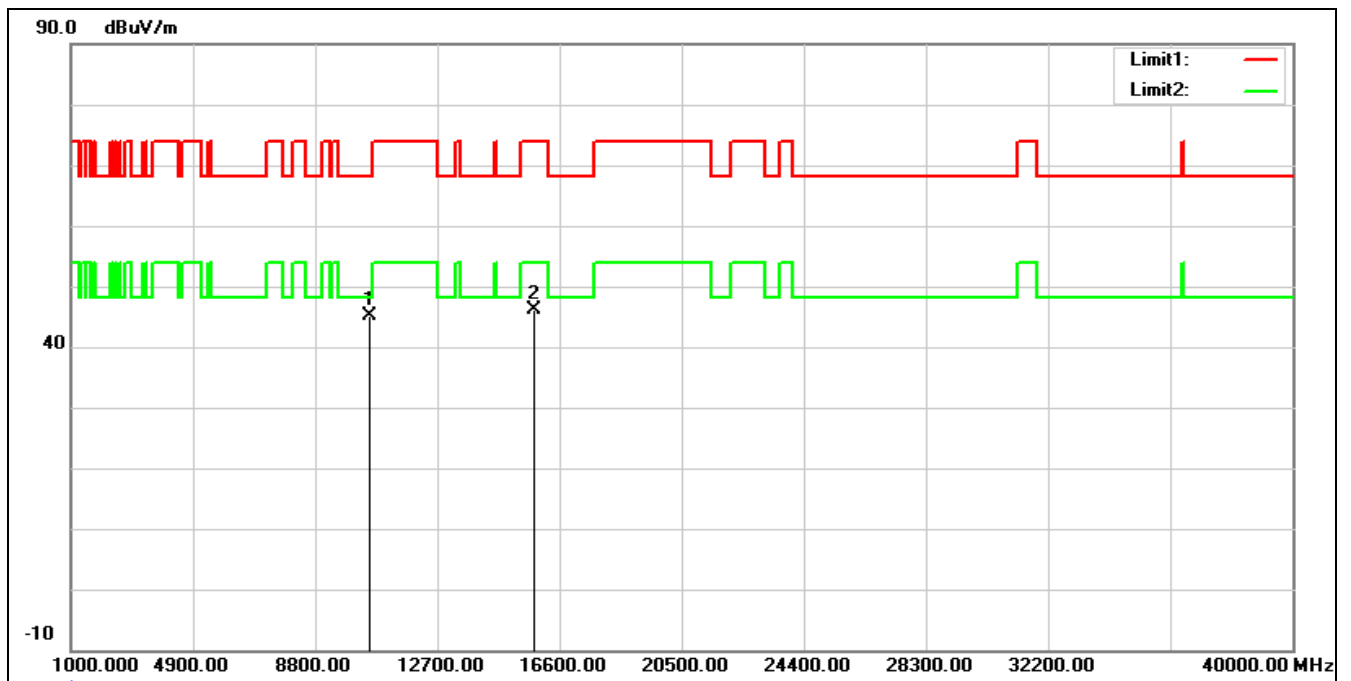


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	31.61	13.61	45.22	68.20	-22.98	peak
2	15780.000	29.53	16.52	46.05	74.00	-27.95	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5260 MHz

Remark:

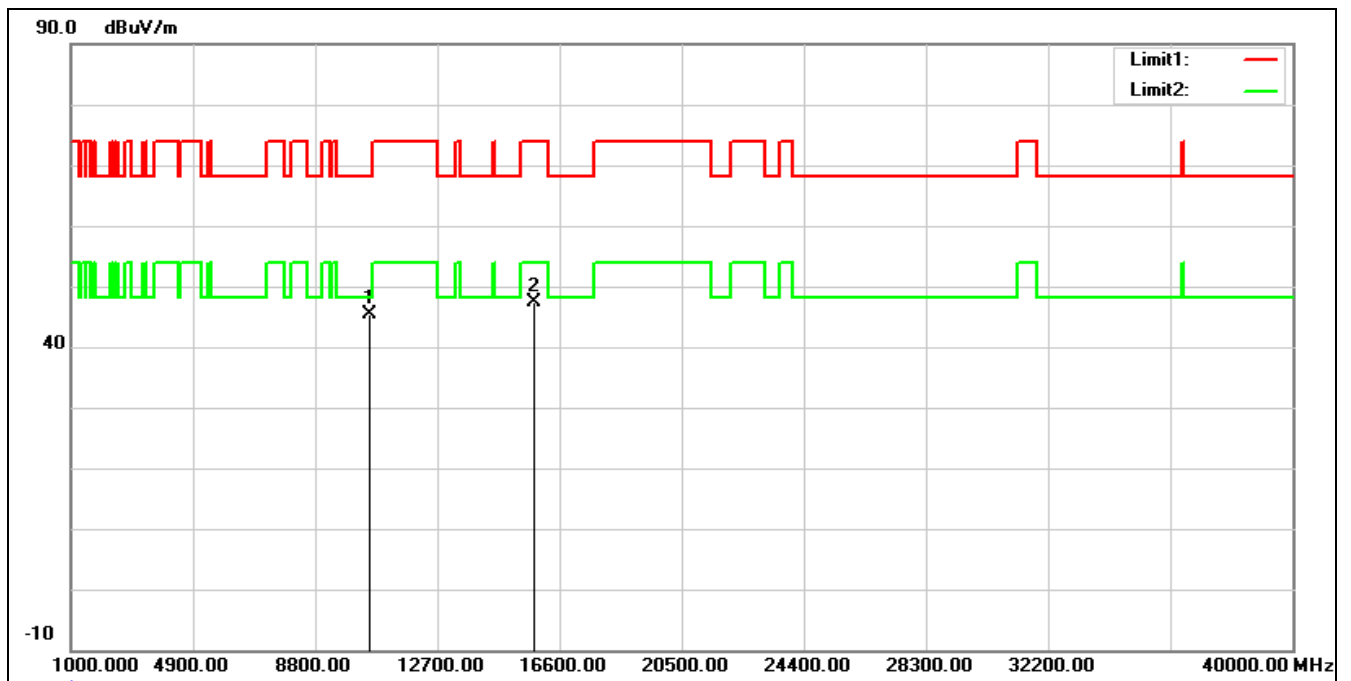


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10520.000	31.77	13.61	45.38	68.20	-22.82	peak
2	15780.000	30.82	16.52	47.34	74.00	-26.66	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5280 MHz

Remark:

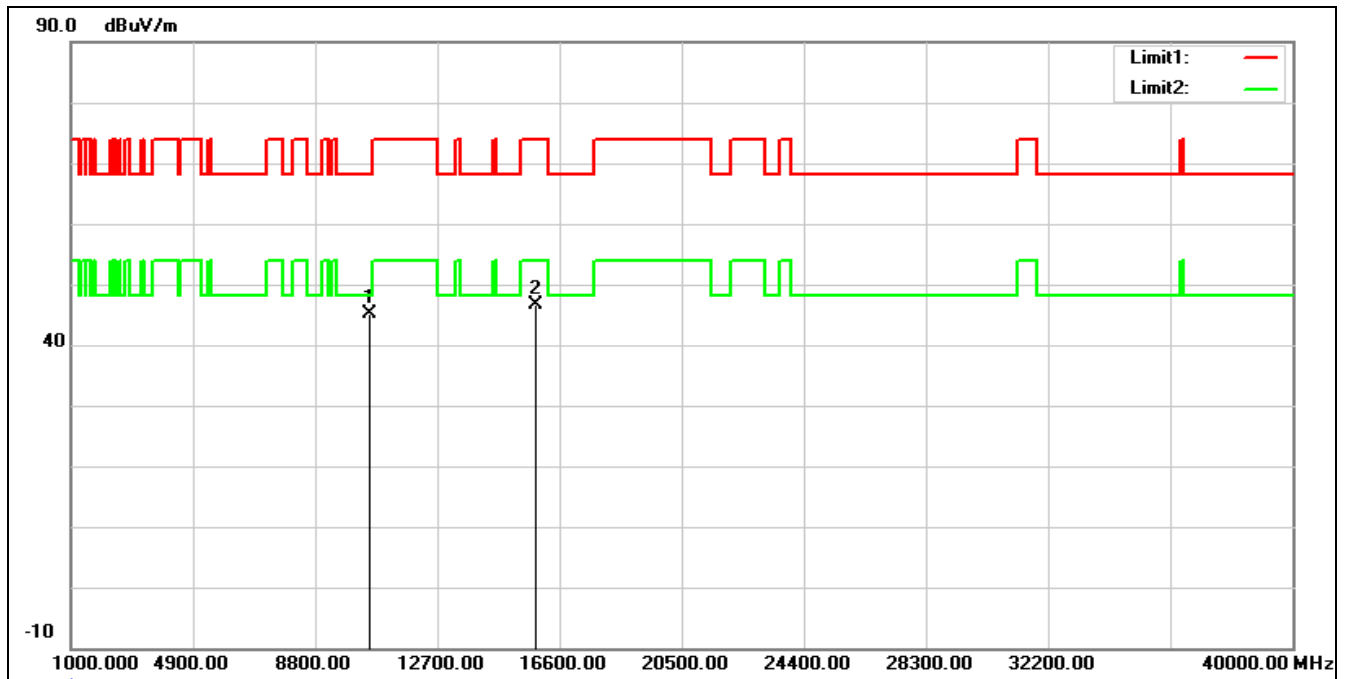


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	31.59	13.63	45.22	68.20	-22.98	peak
2	15840.000	30.11	16.40	46.51	74.00	-27.49	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5280 MHz

Remark:

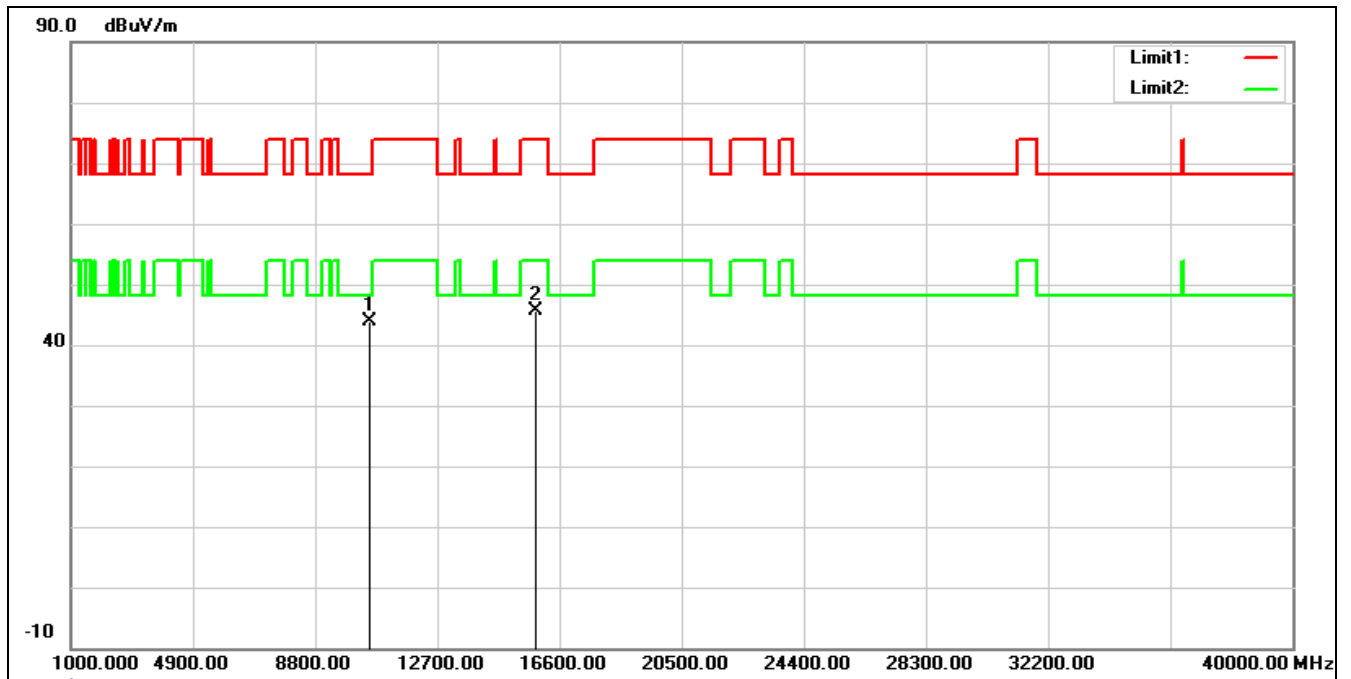


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10560.000	30.36	13.63	43.99	68.20	-24.21	peak
2	15840.000	29.12	16.40	45.52	74.00	-28.48	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5320 MHz
Remark:

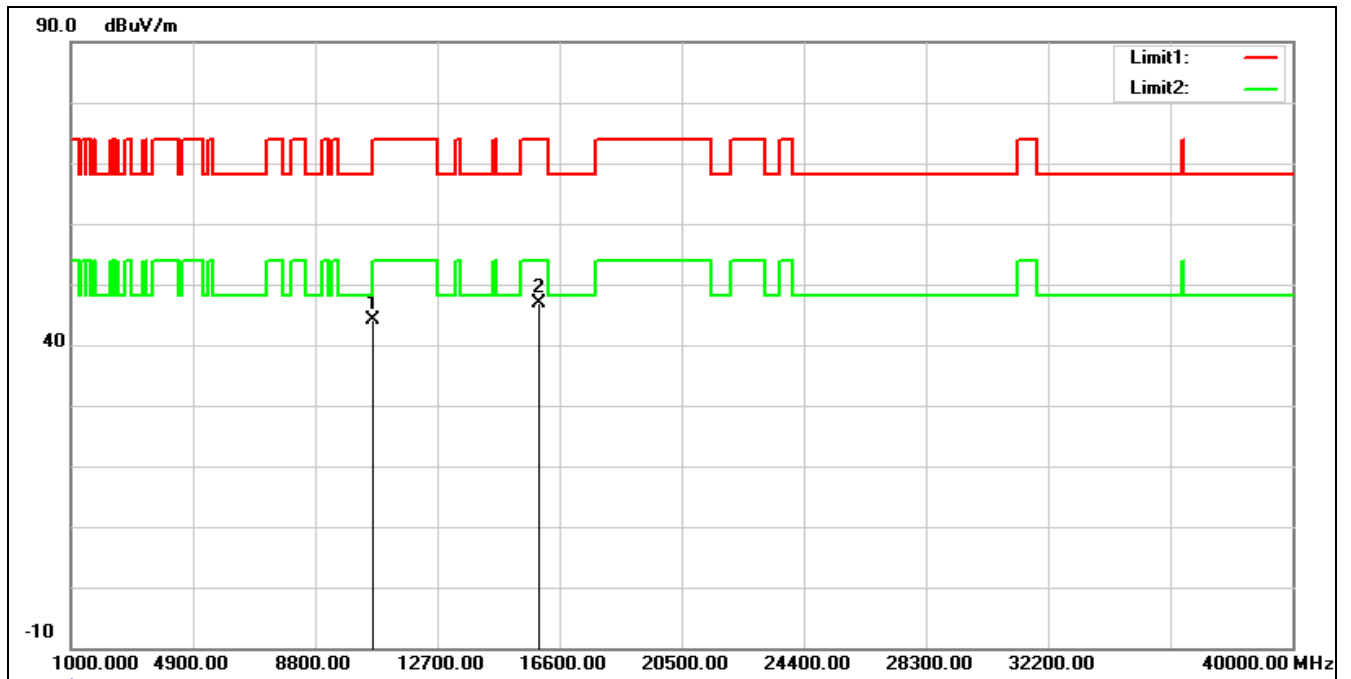

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	30.32	13.70	44.02	74.00	-29.98	peak
2*	15960.000	30.77	16.06	46.83	74.00	-27.17	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5320 MHz
Remark:

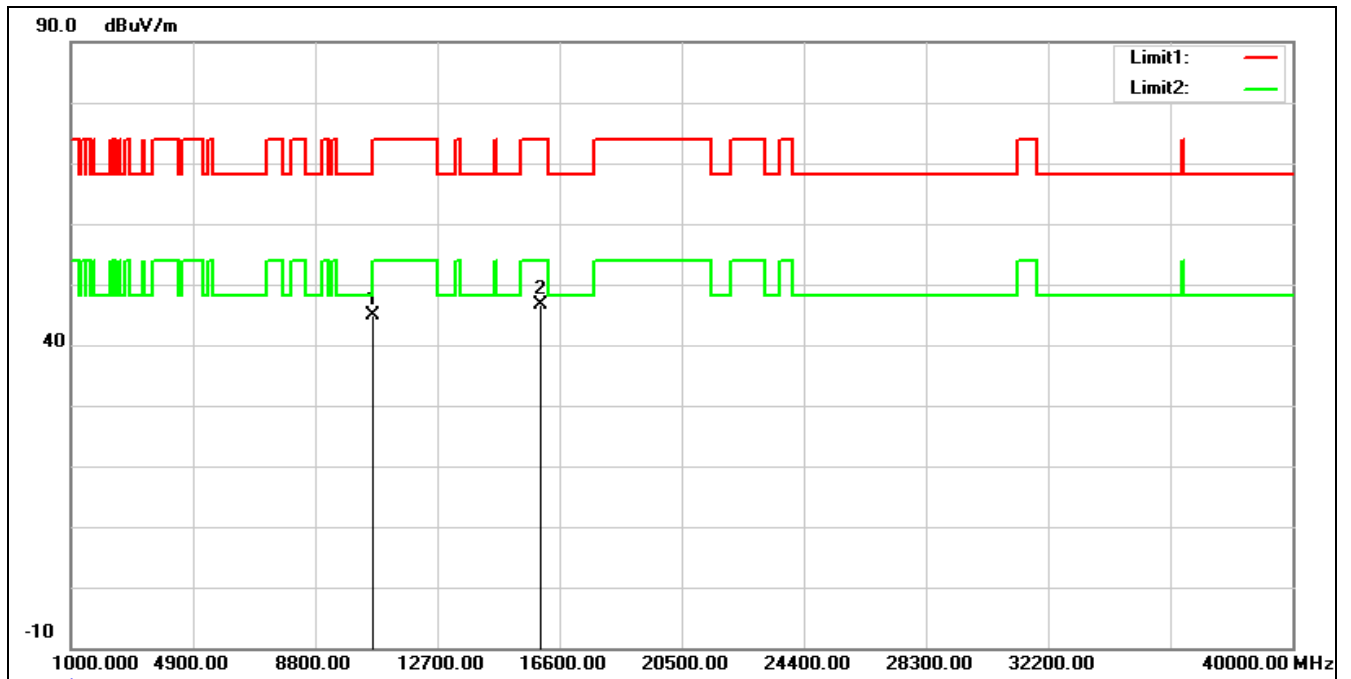


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	31.22	13.70	44.92	74.00	-29.08	peak
2*	15960.000	30.63	16.06	46.69	74.00	-27.31	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5500 MHz

Remark:

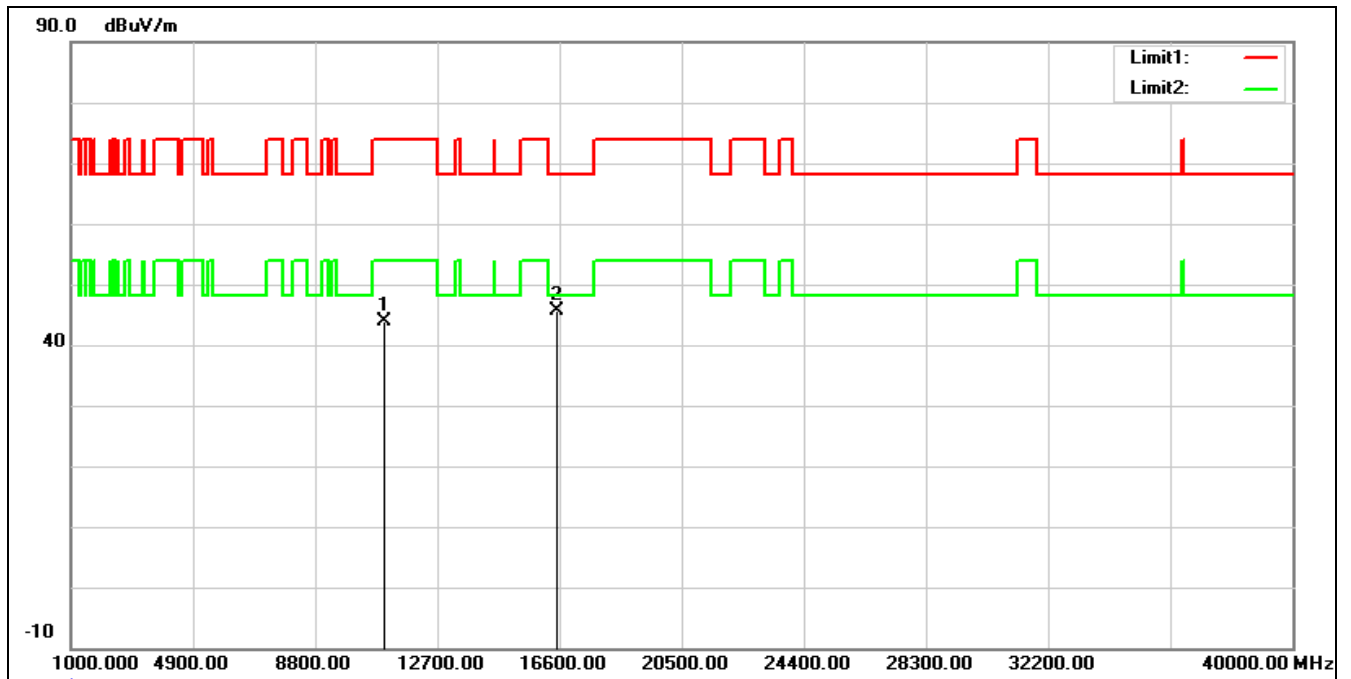

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	29.64	14.30	43.94	74.00	-30.06	peak
2*	16500.000	28.91	16.69	45.60	68.20	-22.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5500 MHz		
Remark:			

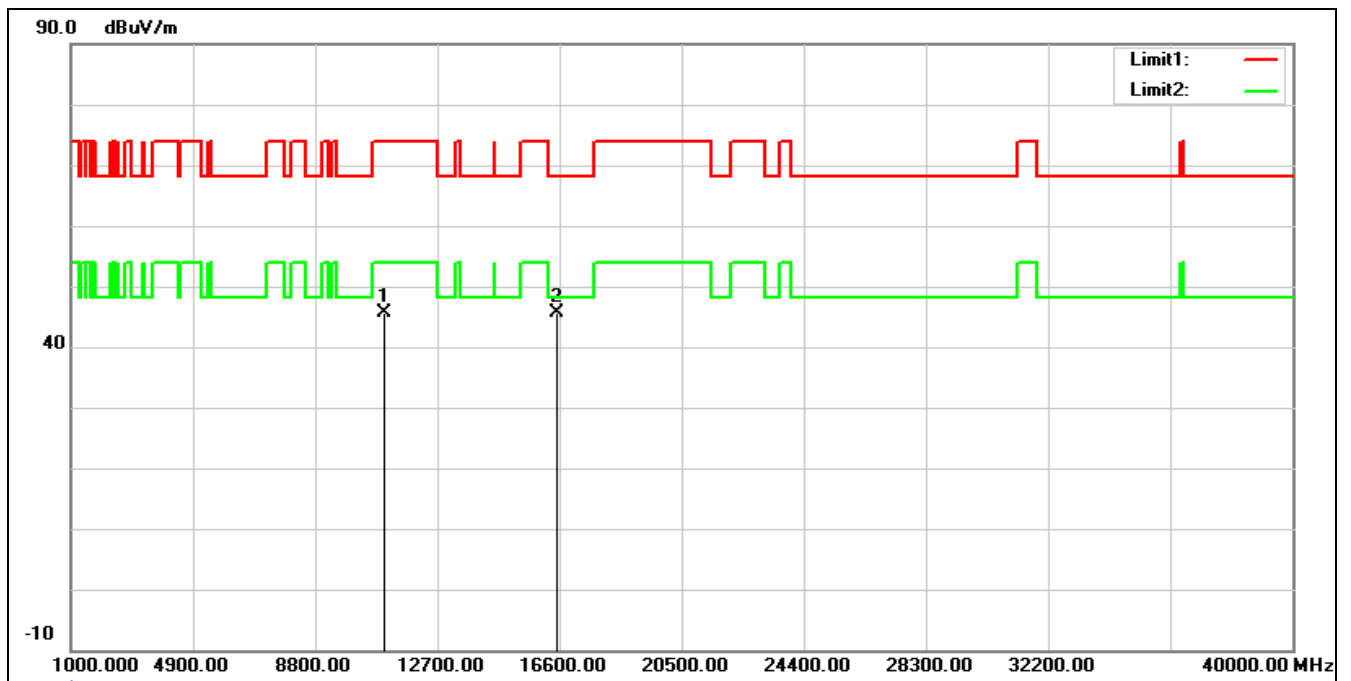


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	31.40	14.30	45.70	74.00	-28.30	peak
2*	16500.000	29.00	16.69	45.69	68.20	-22.51	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5560 MHz

Remark:

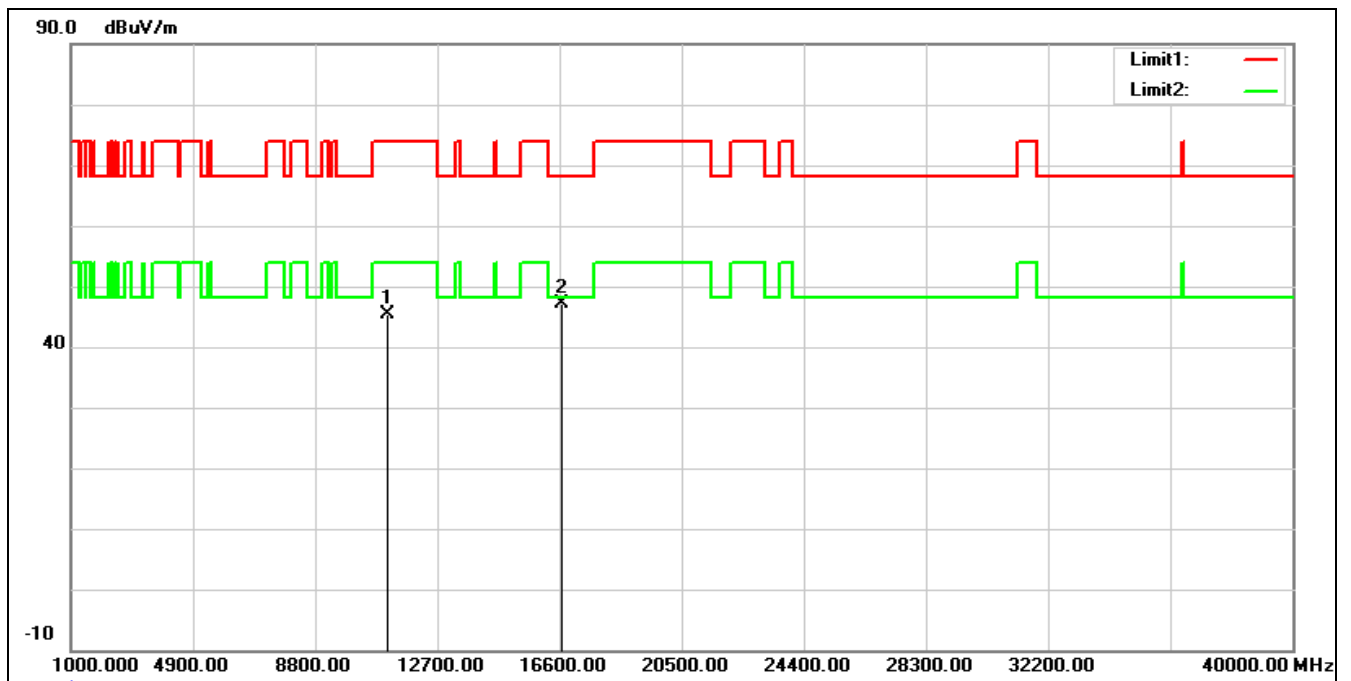


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	30.83	14.52	45.35	74.00	-28.65	peak
2*	16680.000	29.29	17.91	47.20	68.20	-21.00	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5560 MHz

Remark:

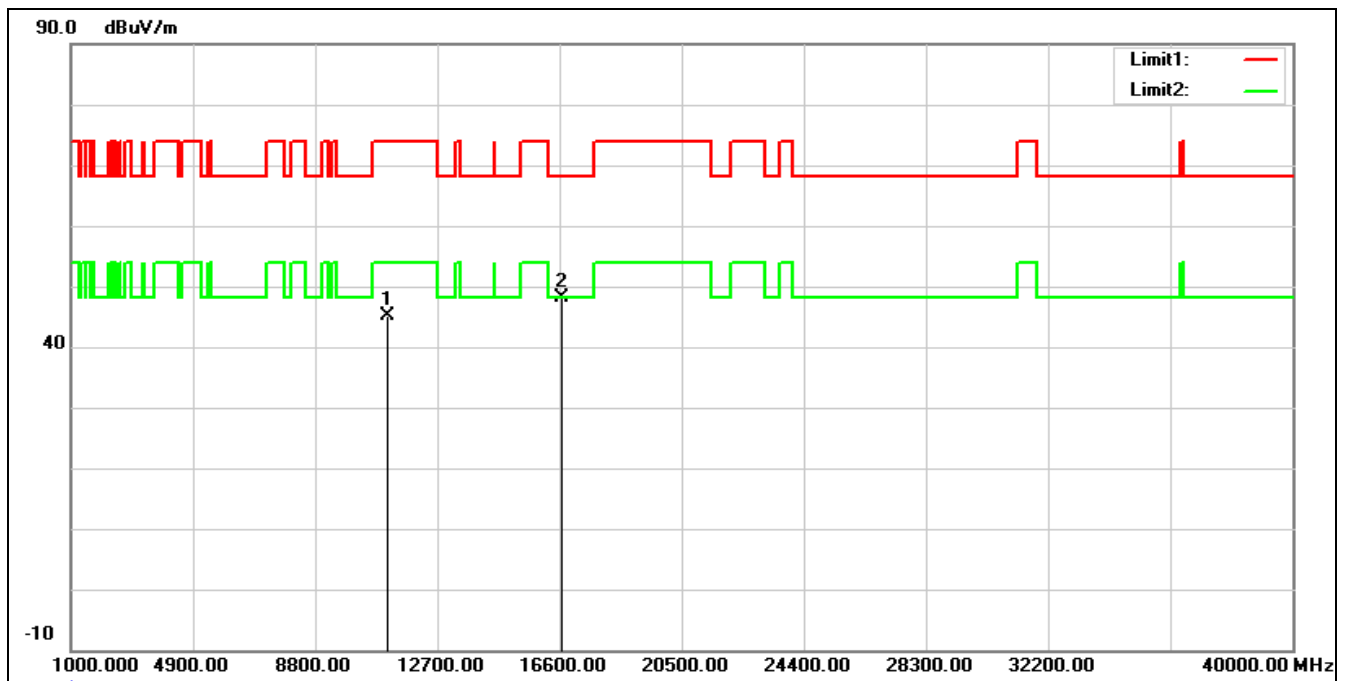


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	30.72	14.52	45.24	74.00	-28.76	peak
2*	16680.000	30.18	17.91	48.09	68.20	-20.11	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5700 MHz

Remark:

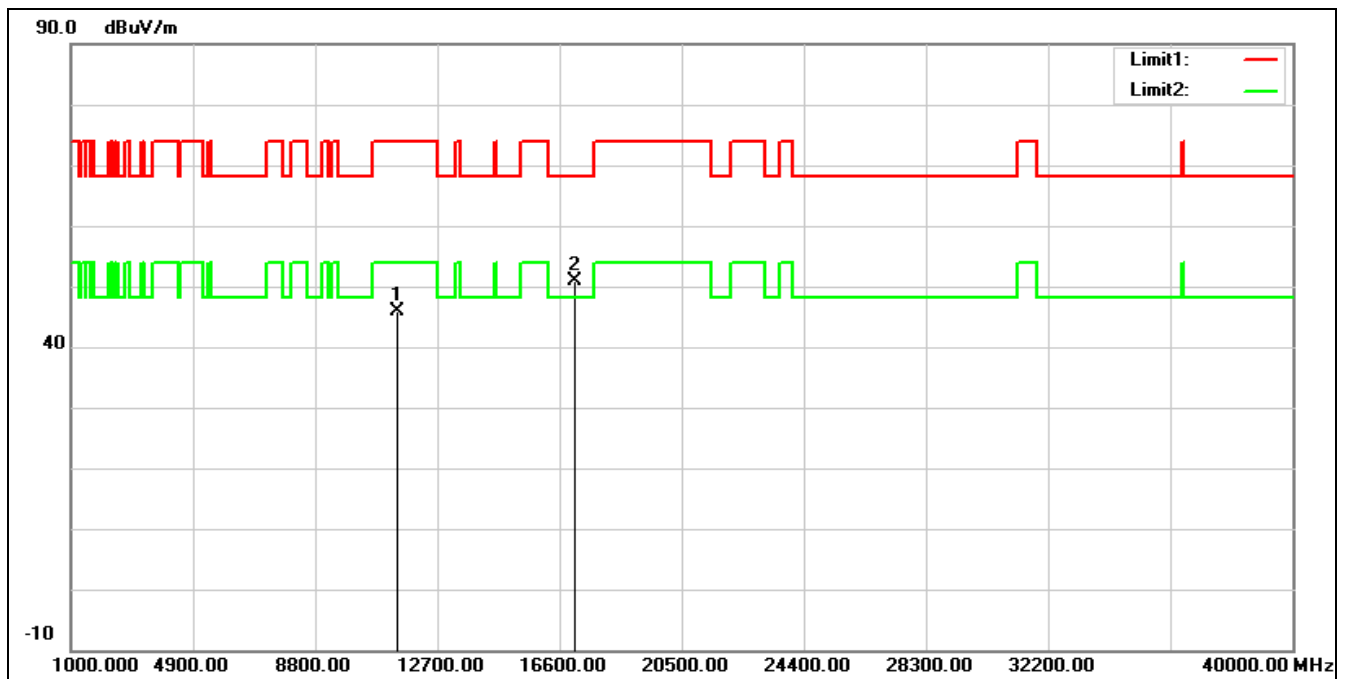


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.30	14.66	45.96	74.00	-28.04	peak
2*	17100.000	30.26	20.57	50.83	68.20	-17.37	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5700 MHz

Remark:

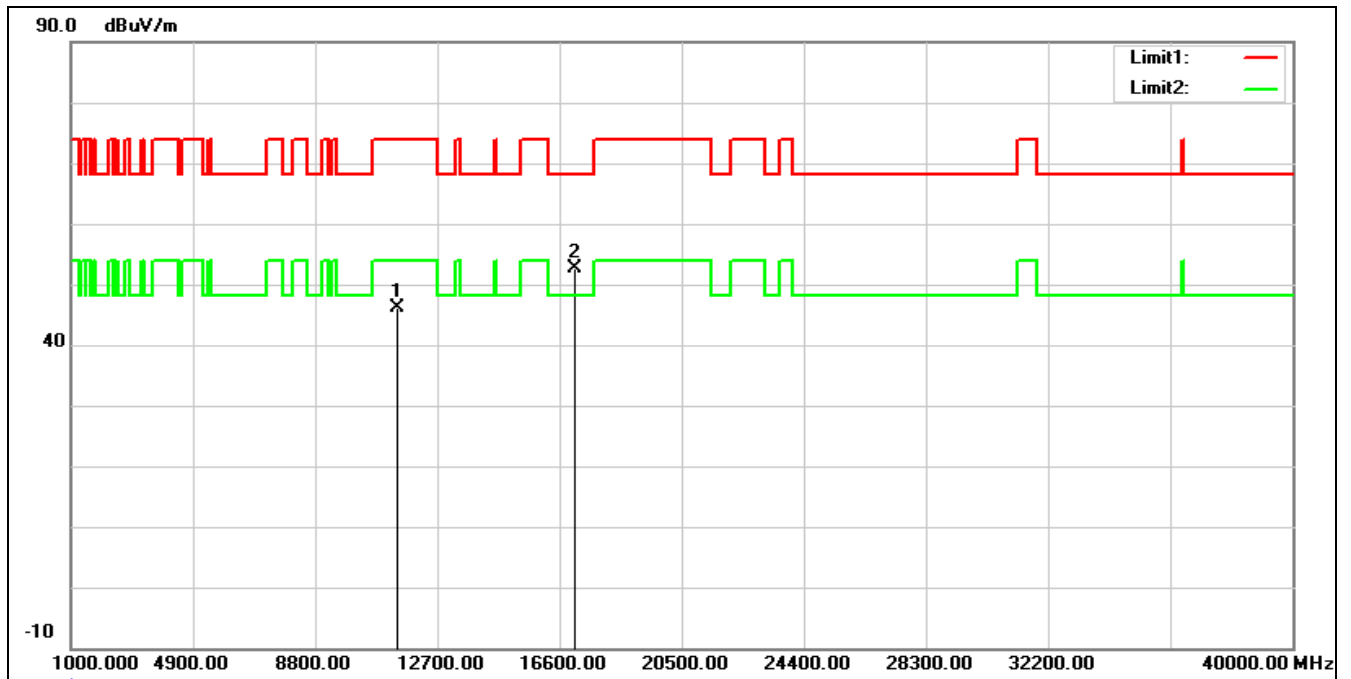


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	31.39	14.66	46.05	74.00	-27.95	peak
2*	17100.000	32.18	20.57	52.75	68.20	-15.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

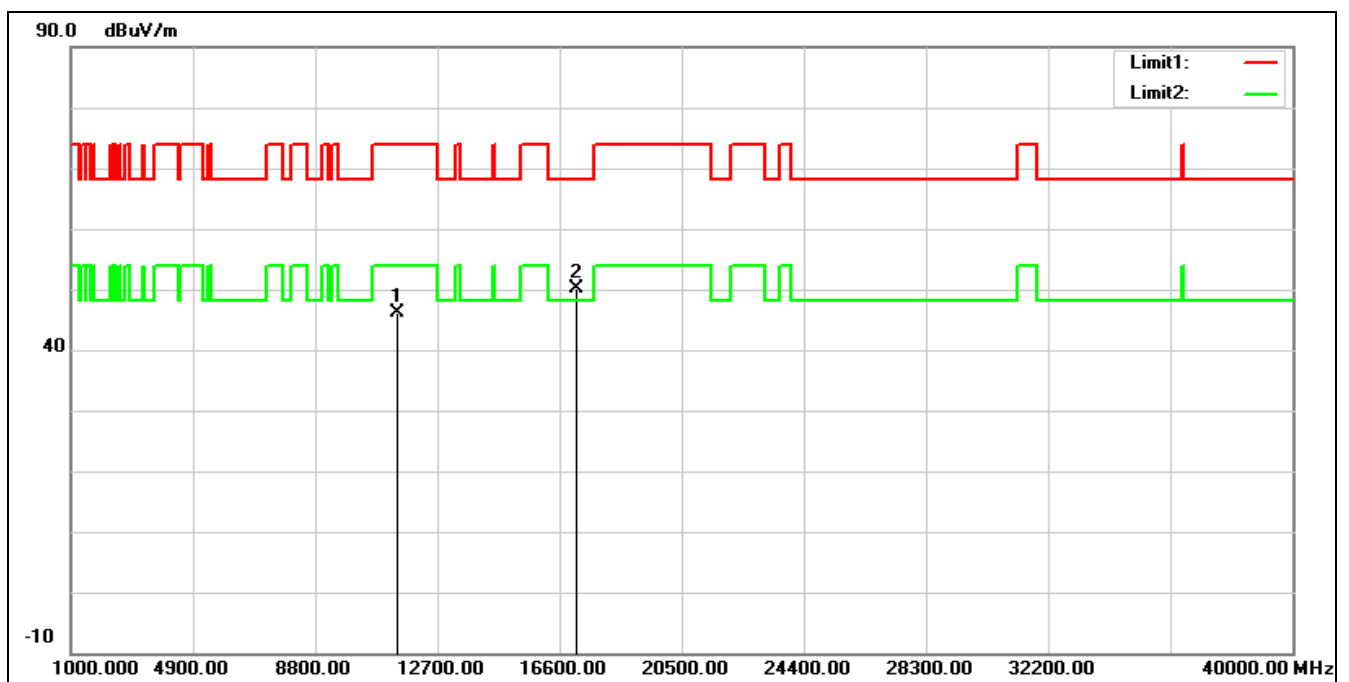


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	31.38	14.84	46.22	74.00	-27.78	peak
2*	17160.000	29.07	20.96	50.03	68.20	-18.17	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5720 MHz
Remark:

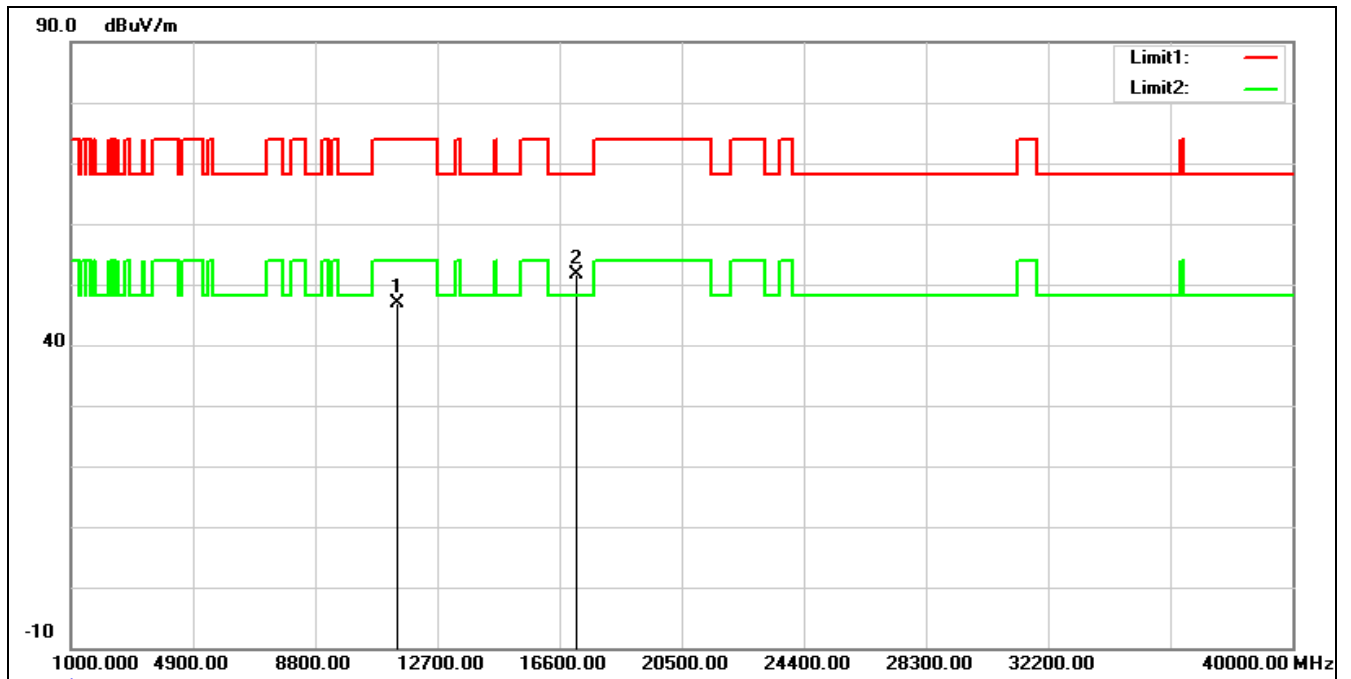

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11440.000	32.04	14.84	46.88	74.00	-27.12	peak
2*	17160.000	30.66	20.96	51.62	68.20	-16.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

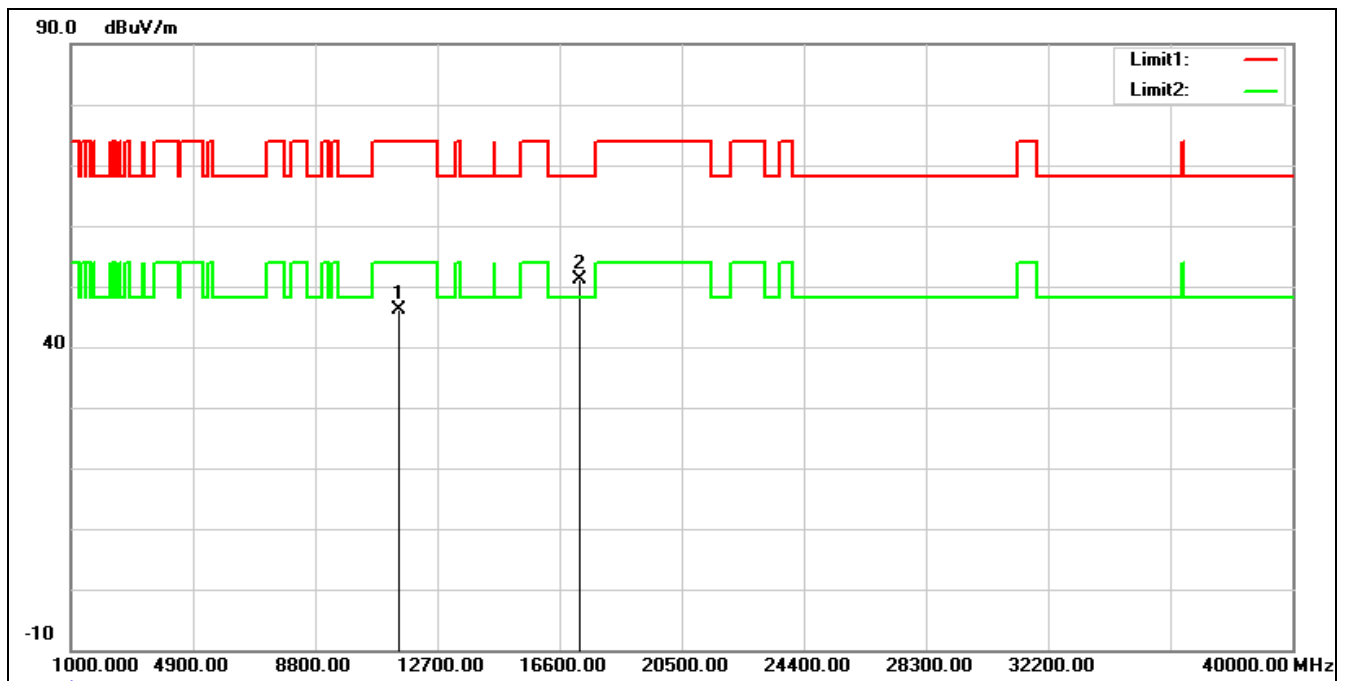


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.05	15.07	46.12	74.00	-27.88	peak
2*	17235.000	29.55	21.53	51.08	68.20	-17.12	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5745 MHz

Remark:

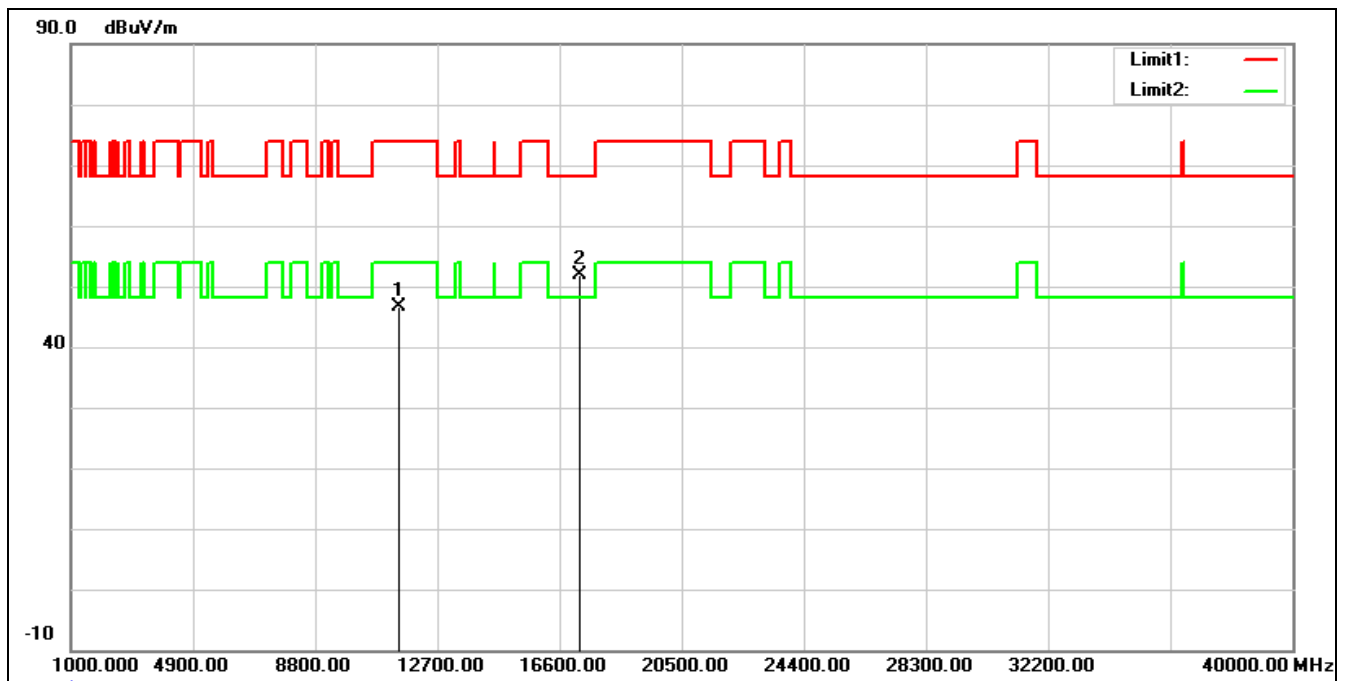


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	31.45	15.07	46.52	74.00	-27.48	peak
2*	17235.000	30.33	21.53	51.86	68.20	-16.34	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5785 MHz

Remark:

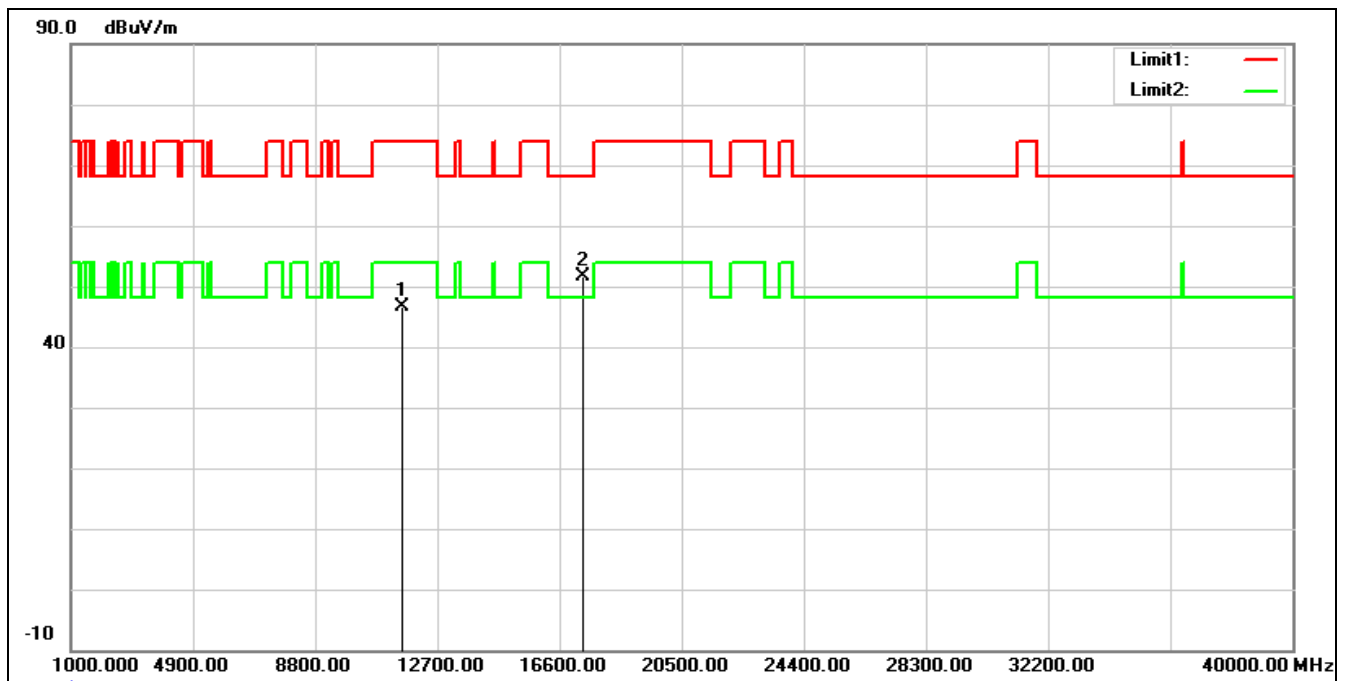


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	31.76	14.84	46.60	74.00	-27.40	peak
2*	17355.000	29.35	22.35	51.70	68.20	-16.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

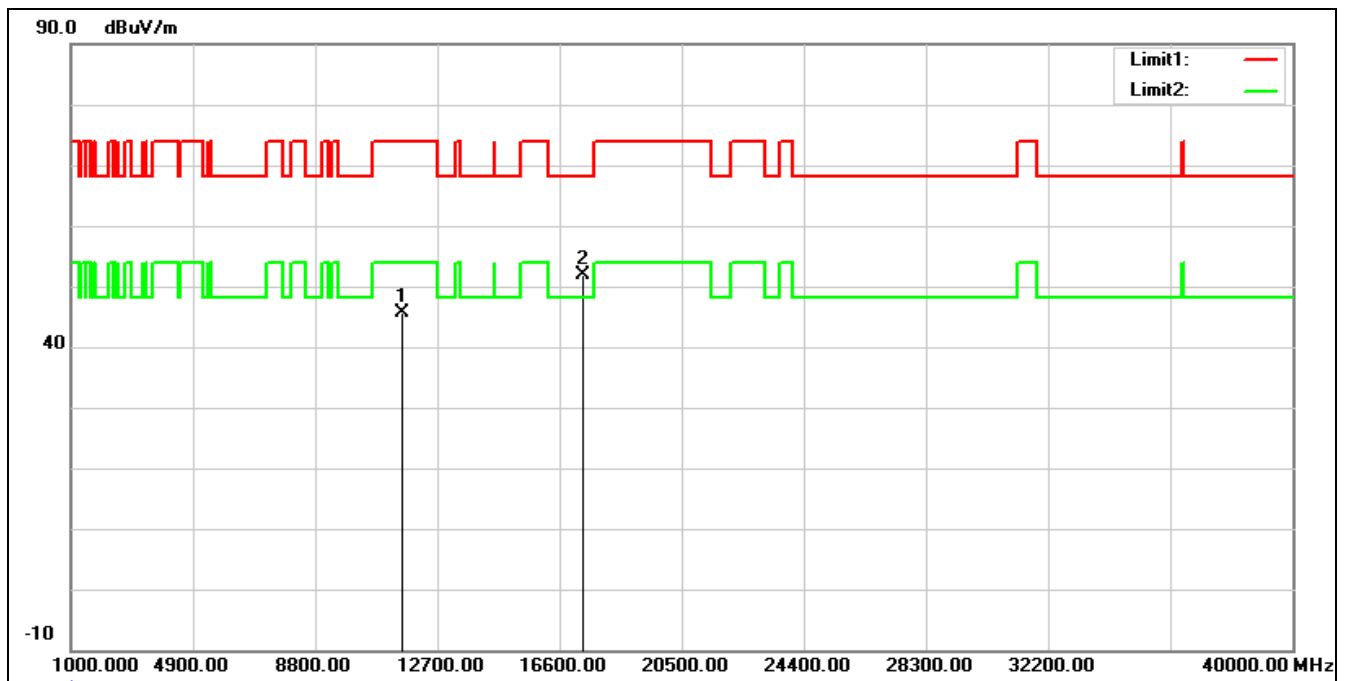

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	30.82	14.84	45.66	74.00	-28.34	peak
2*	17355.000	29.41	22.35	51.76	68.20	-16.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

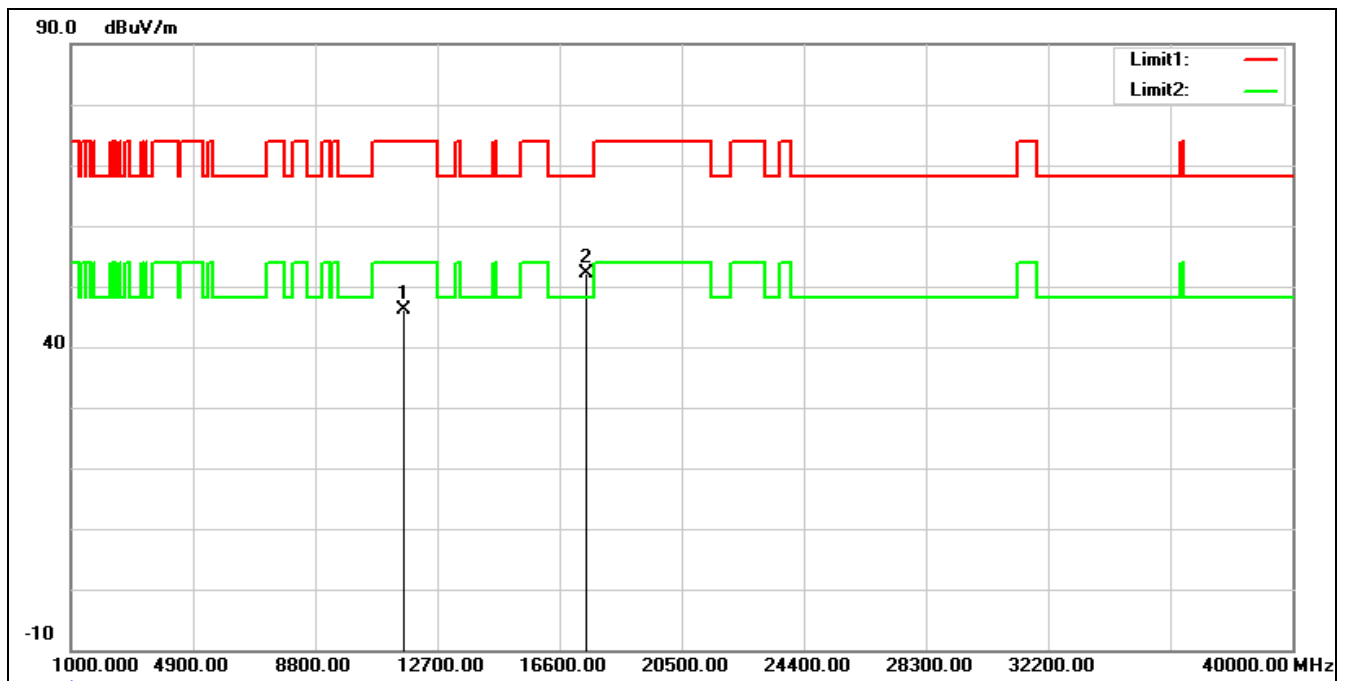


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	31.68	14.56	46.24	74.00	-27.76	peak
2*	17475.000	29.02	23.20	52.22	68.20	-15.98	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5825 MHz

Remark:

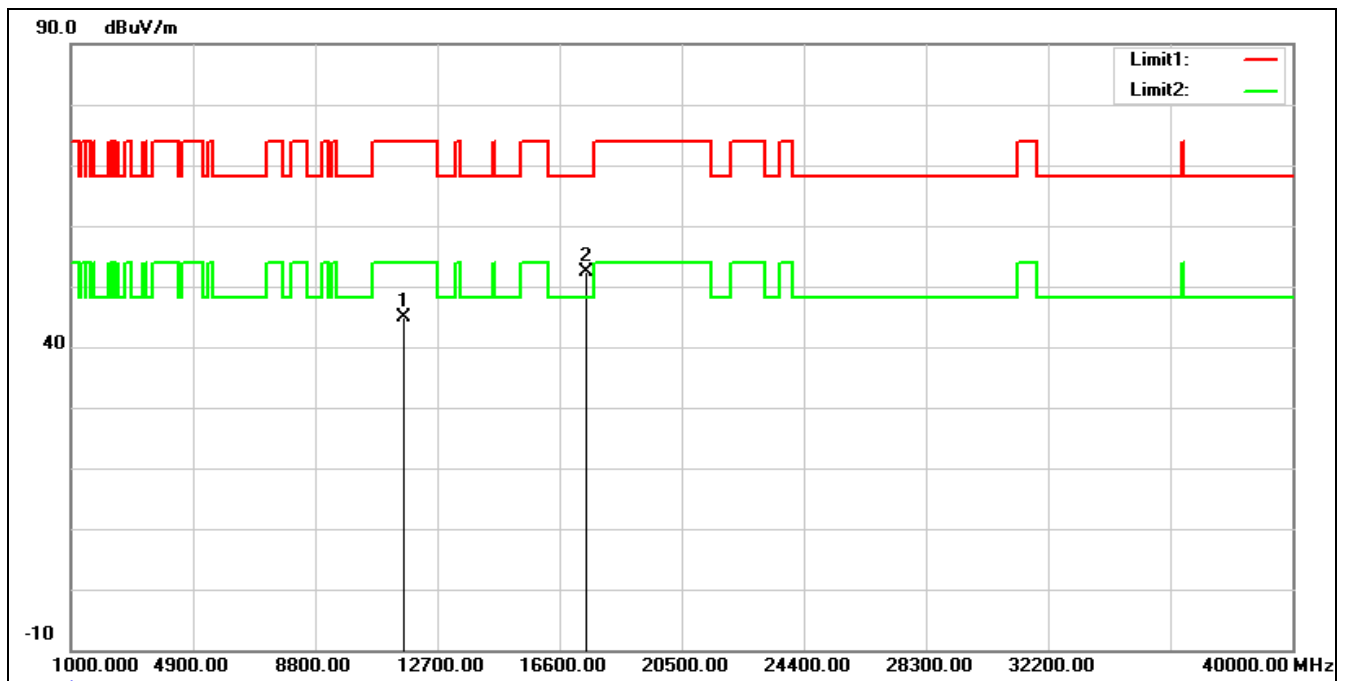


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	30.21	14.56	44.77	74.00	-29.23	peak
2*	17475.000	29.24	23.20	52.44	68.20	-15.76	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5190 MHz
Remark:

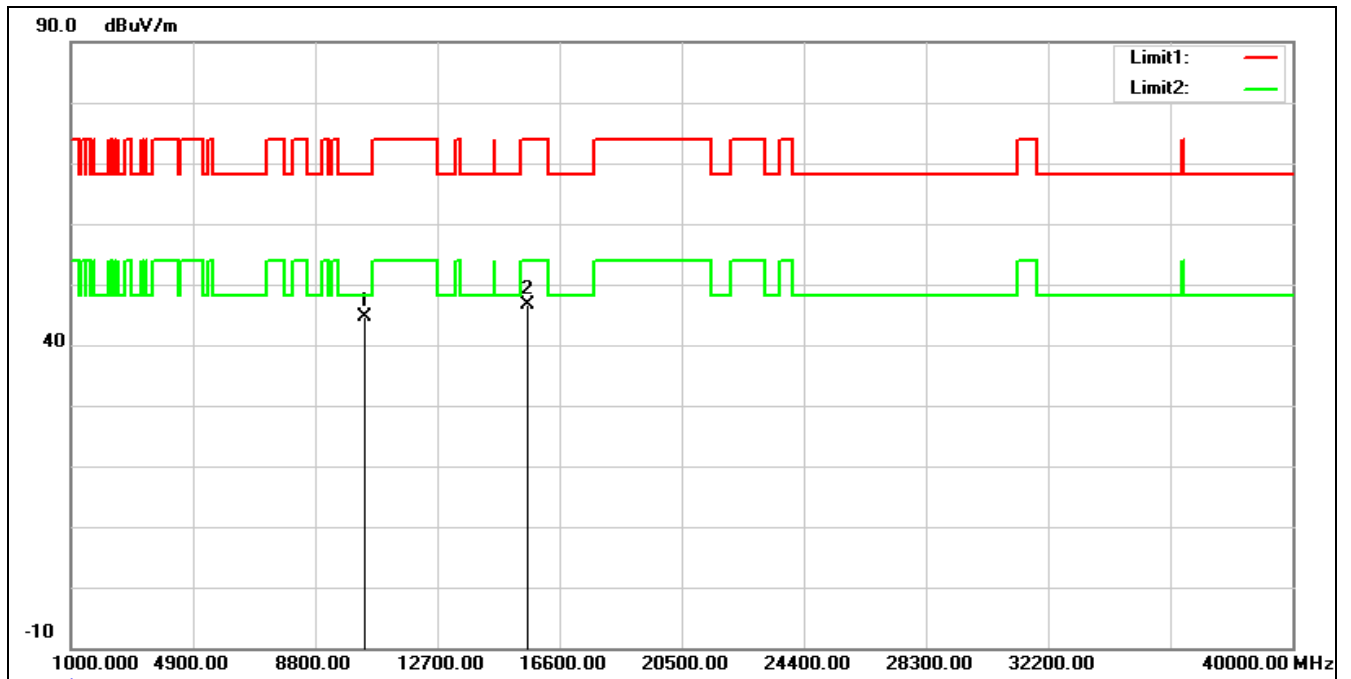


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	31.09	13.44	44.53	68.20	-23.67	peak
2	15570.000	29.95	16.72	46.67	74.00	-27.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5190 MHz		
Remark:			

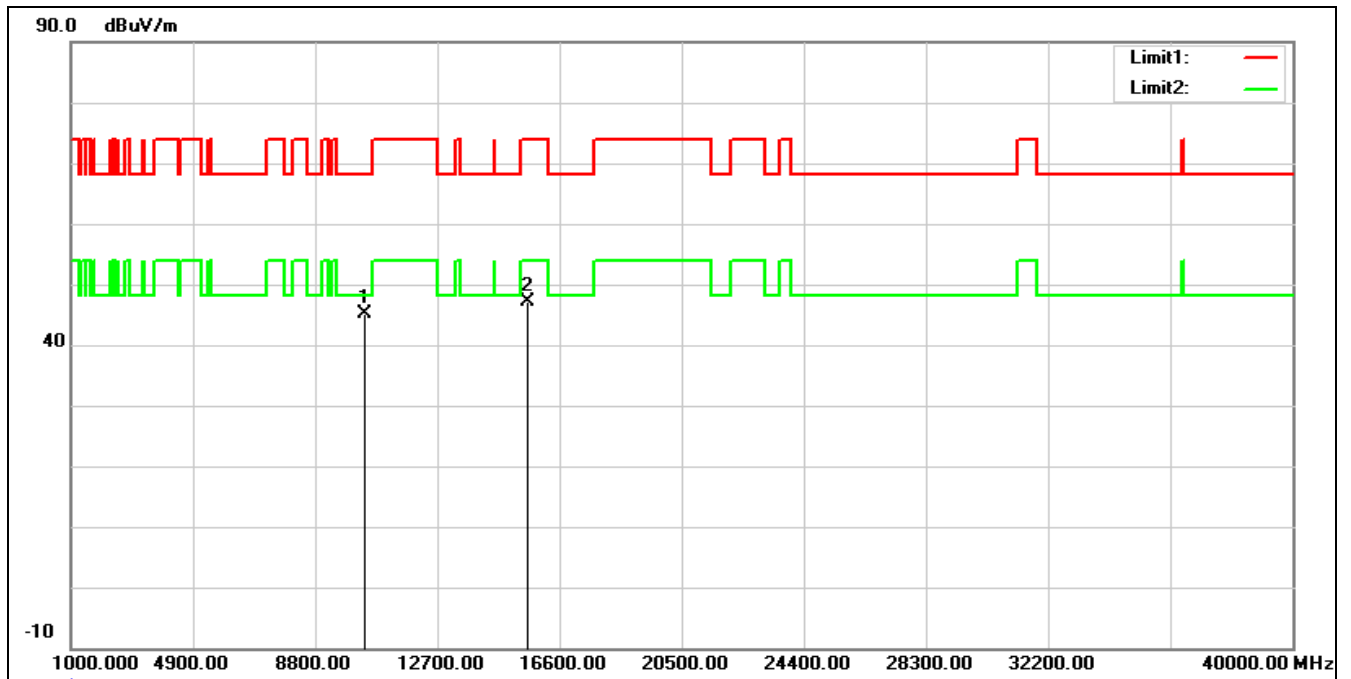


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10380.000	31.62	13.44	45.06	68.20	-23.14	peak
2	15570.000	30.41	16.72	47.13	74.00	-26.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5230 MHz		
Remark:			

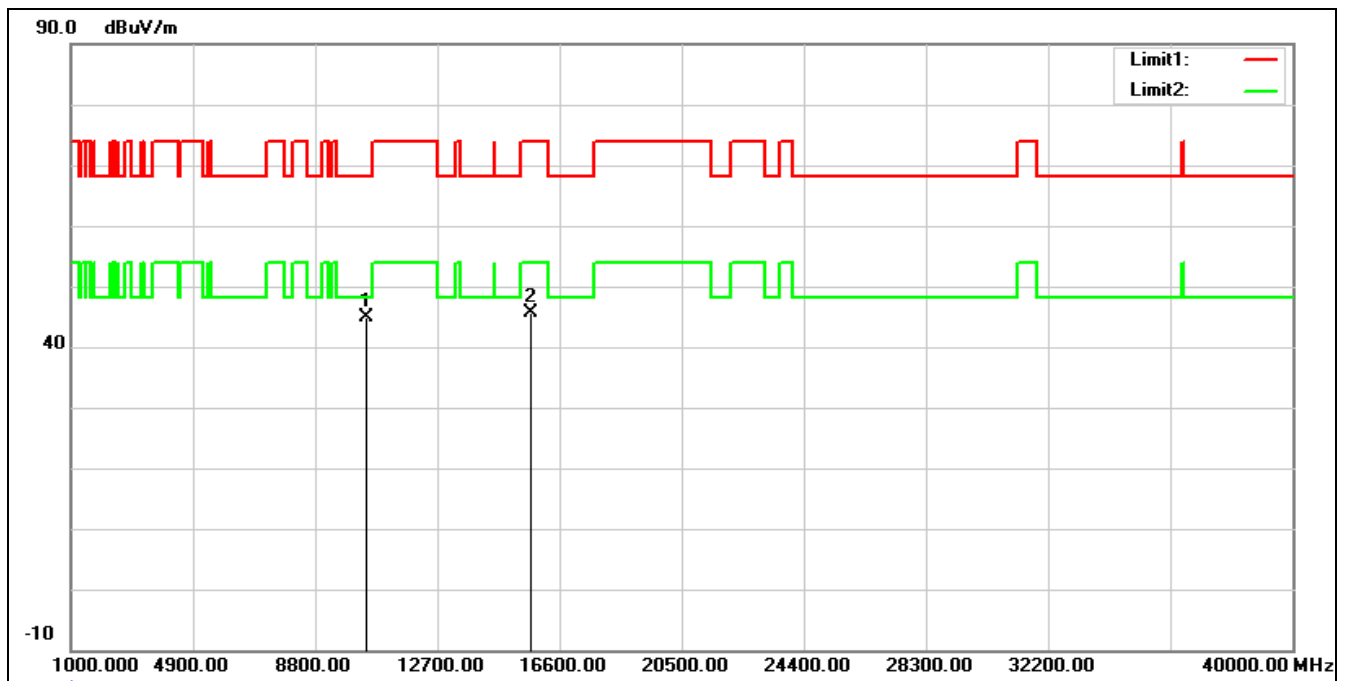

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	31.27	13.57	44.84	68.20	-23.36	peak
2	15690.000	29.08	16.59	45.67	74.00	-28.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5230 MHz		
Remark:			

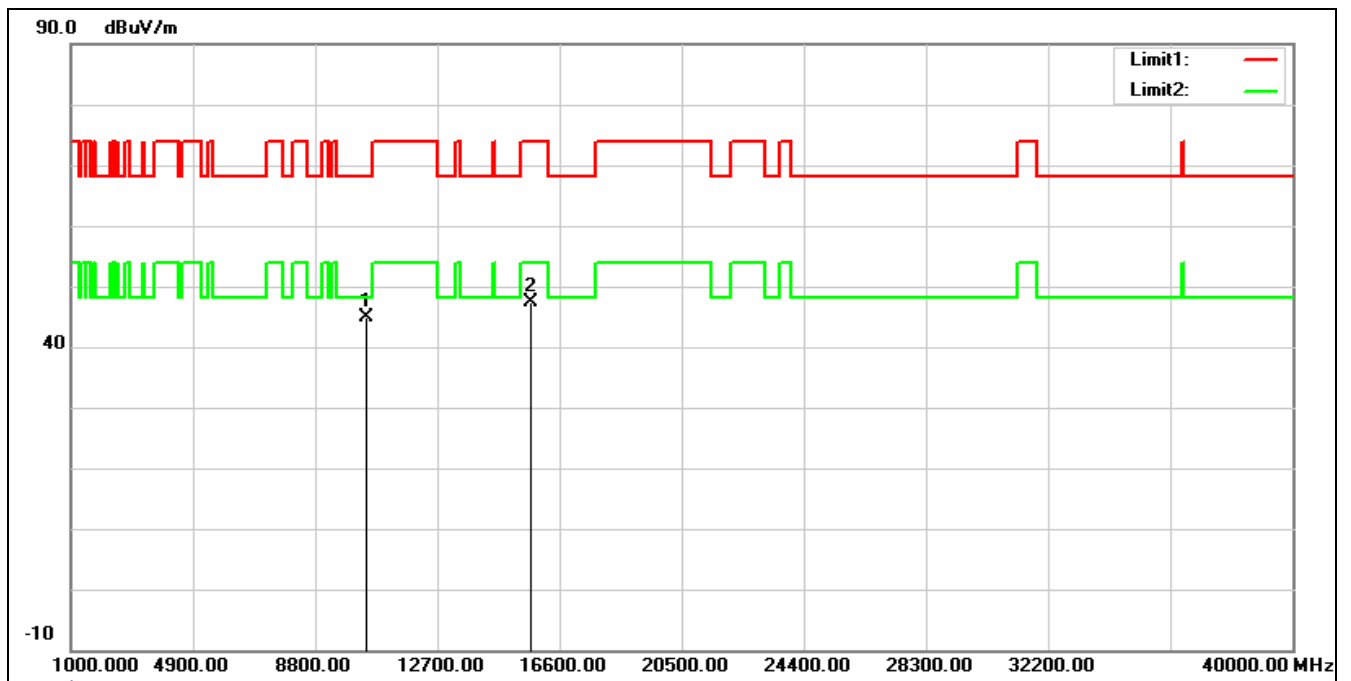


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10460.000	31.27	13.57	44.84	68.20	-23.36	peak
2	15690.000	30.78	16.59	47.37	74.00	-26.63	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5270 MHz

Remark:

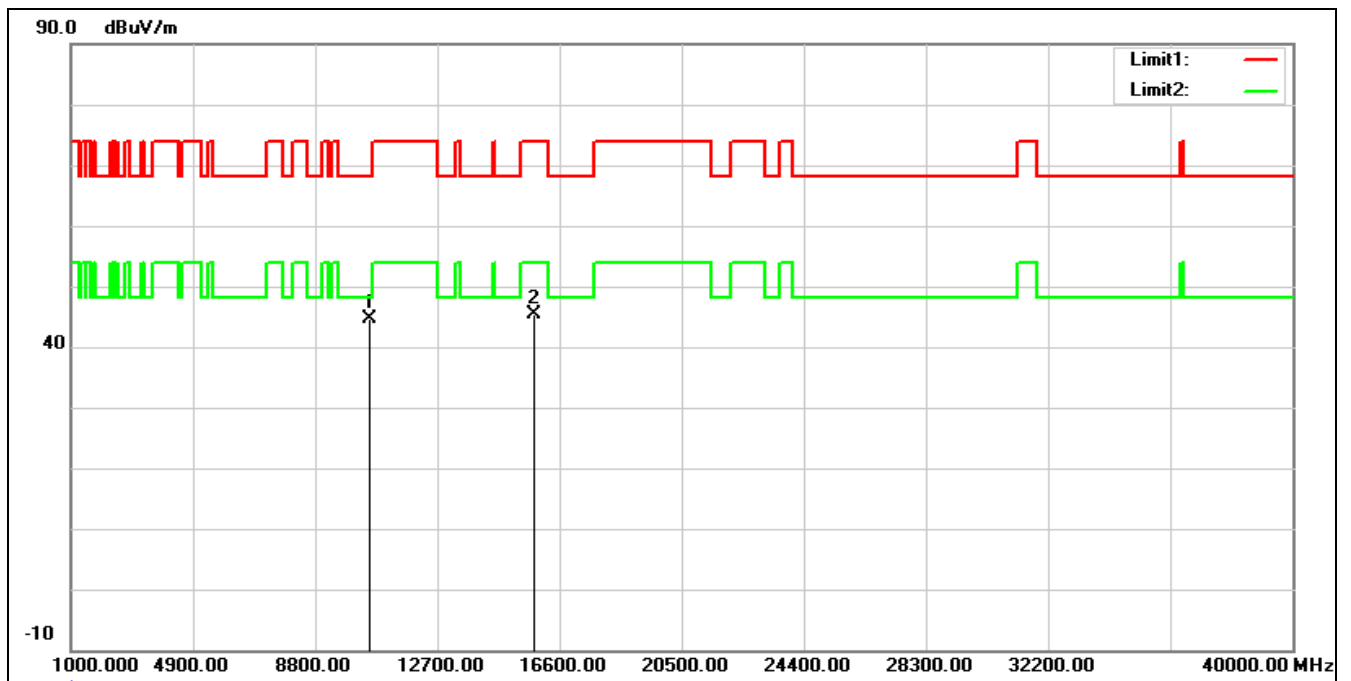

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	31.06	13.61	44.67	68.20	-23.53	peak
2	15810.000	28.82	16.48	45.30	74.00	-28.70	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5270 MHz
Remark:

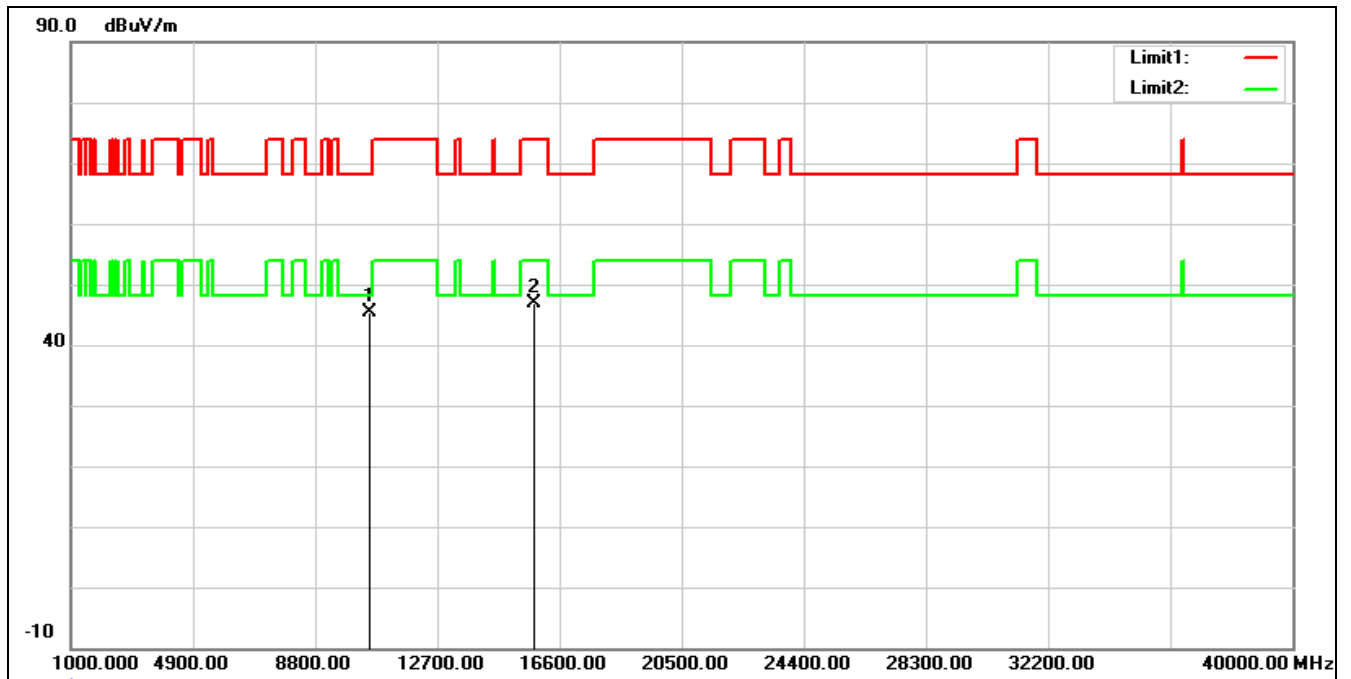


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10540.000	31.80	13.61	45.41	68.20	-22.79	peak
2	15810.000	30.46	16.48	46.94	74.00	-27.06	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5310 MHz

Remark:

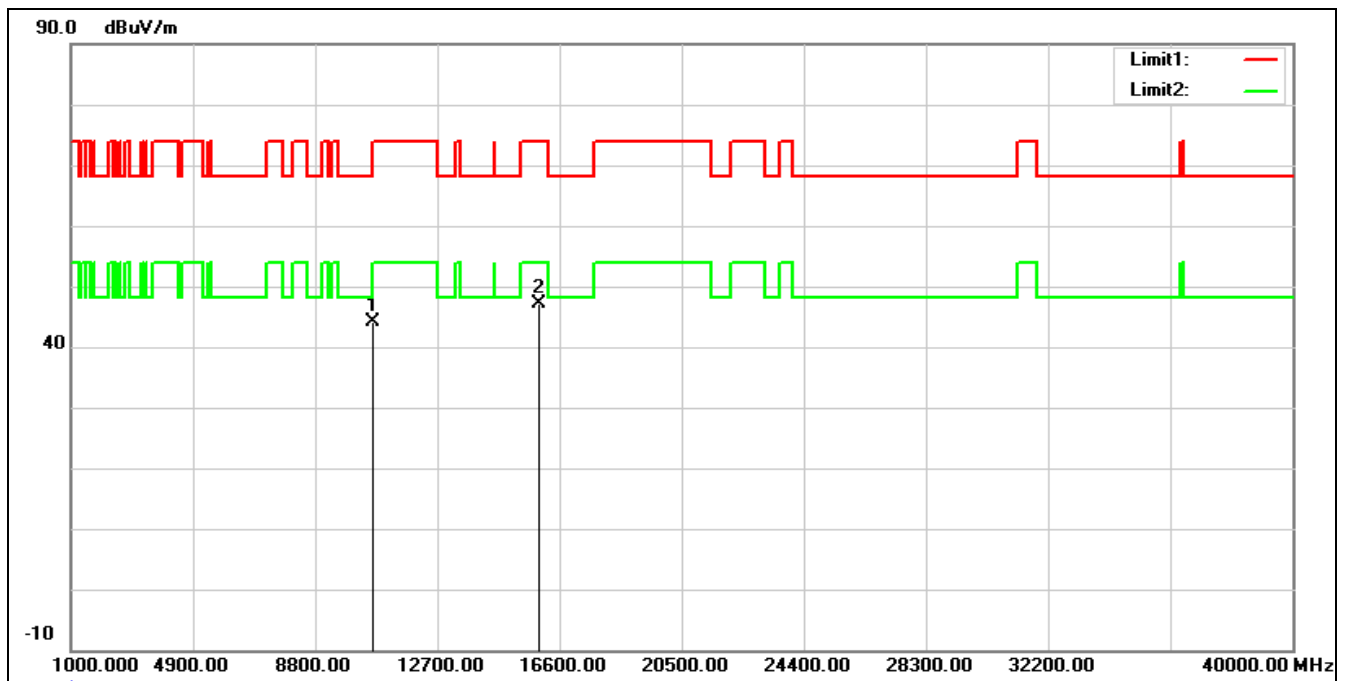


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	30.53	13.66	44.19	74.00	-29.81	peak
2*	15930.000	31.00	16.15	47.15	74.00	-26.85	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5310 MHz

Remark:

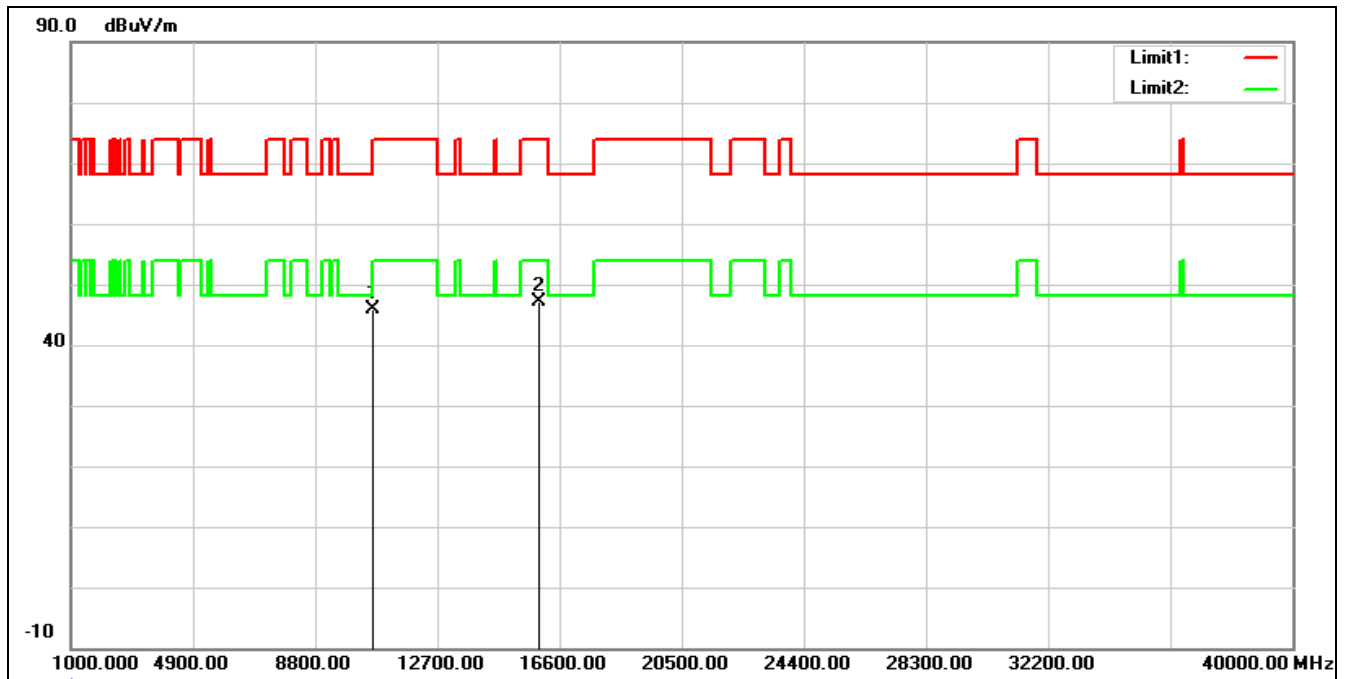


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	32.20	13.66	45.86	74.00	-28.14	peak
2*	15930.000	30.97	16.15	47.12	74.00	-26.88	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT40 5510 MHz

Remark:

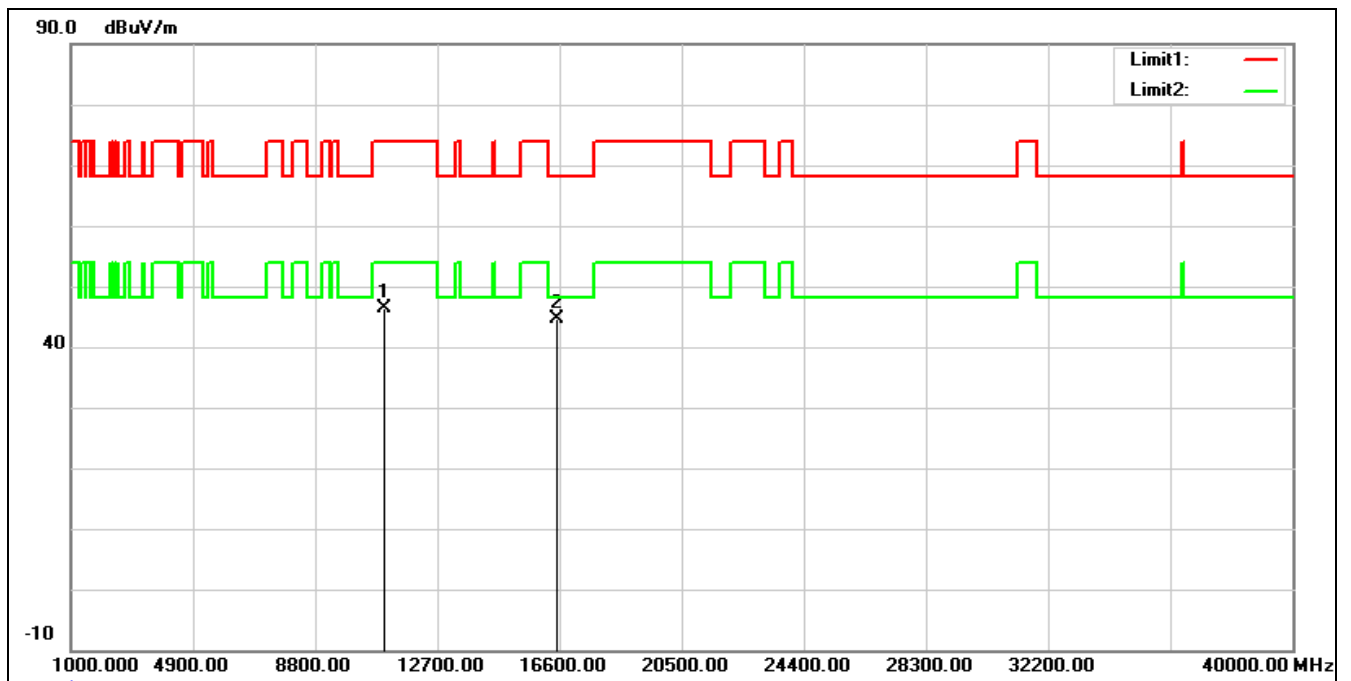

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.91	14.35	46.26	74.00	-27.74	peak
2*	16530.000	27.84	16.91	44.75	68.20	-23.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5510 MHz		
Remark:			

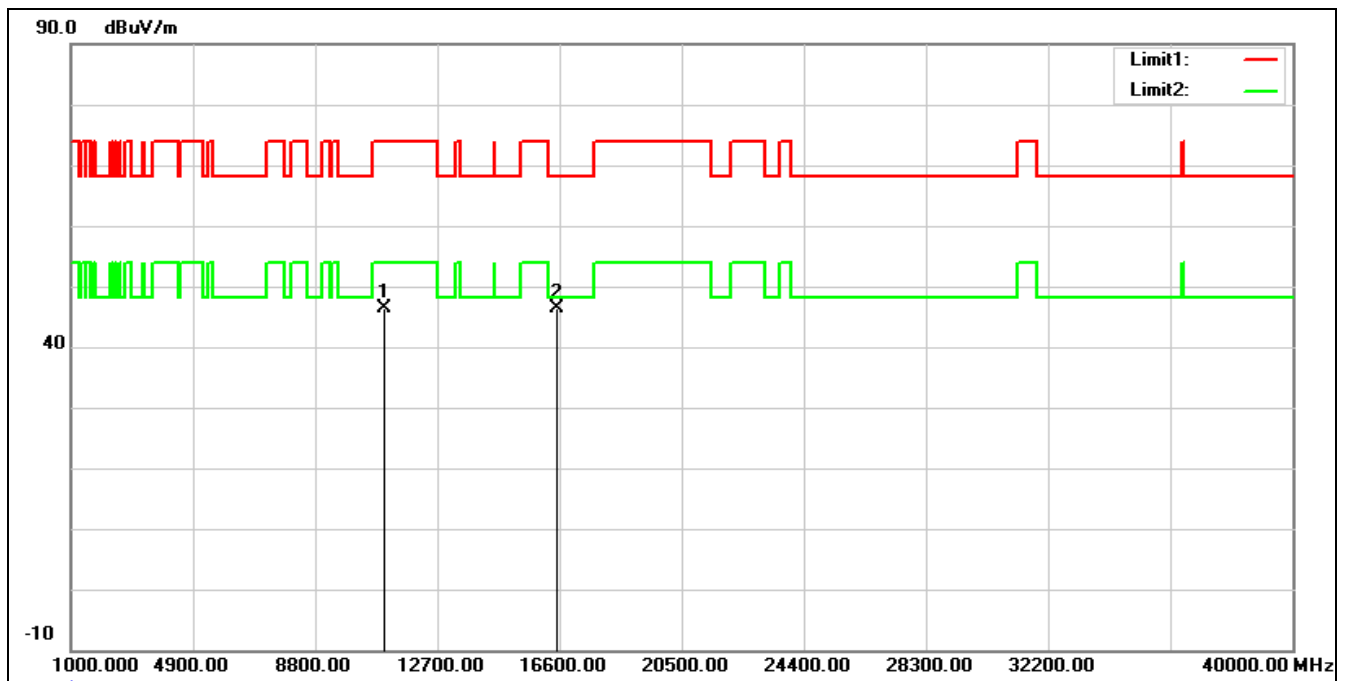


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	31.93	14.35	46.28	74.00	-27.72	peak
2*	16530.000	29.52	16.91	46.43	68.20	-21.77	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5550 MHz

Remark:

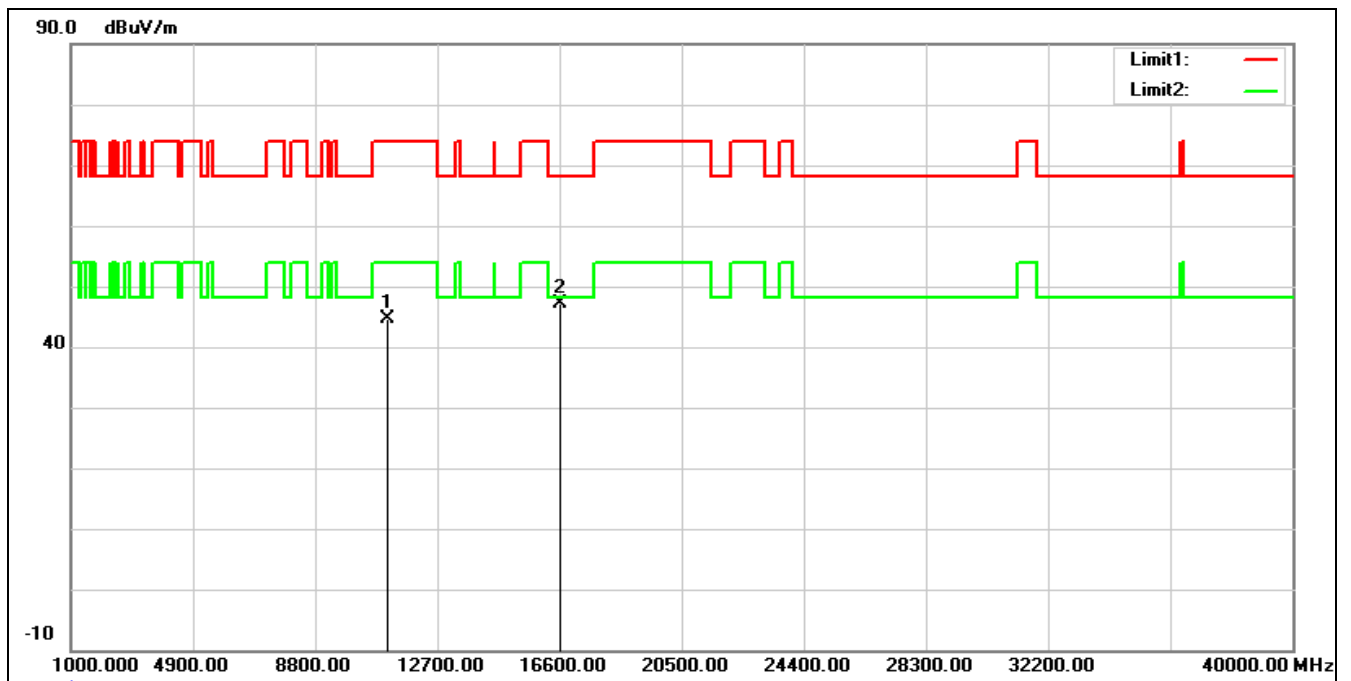


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	30.15	14.56	44.71	74.00	-29.29	peak
2*	16650.000	29.42	17.73	47.15	68.20	-21.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5550 MHz

Remark:

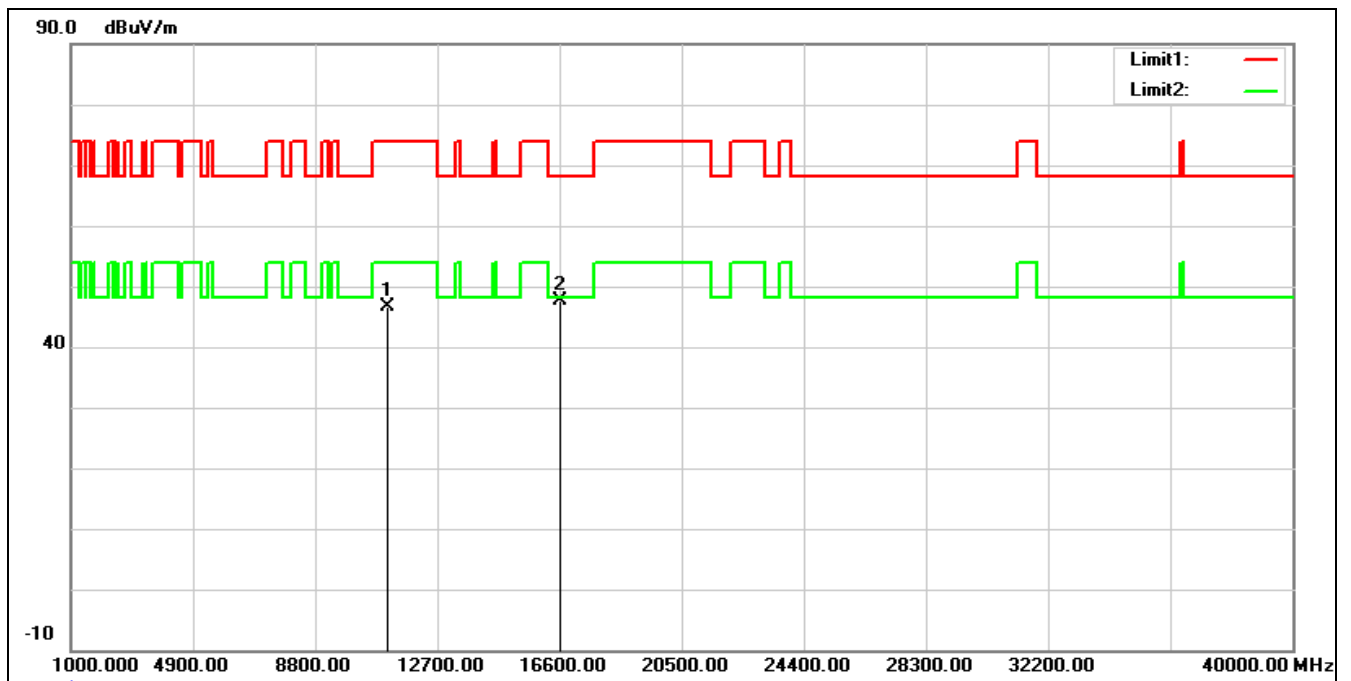

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	32.01	14.56	46.57	74.00	-27.43	peak
2*	16650.000	29.93	17.73	47.66	68.20	-20.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5670 MHz		
Remark:			

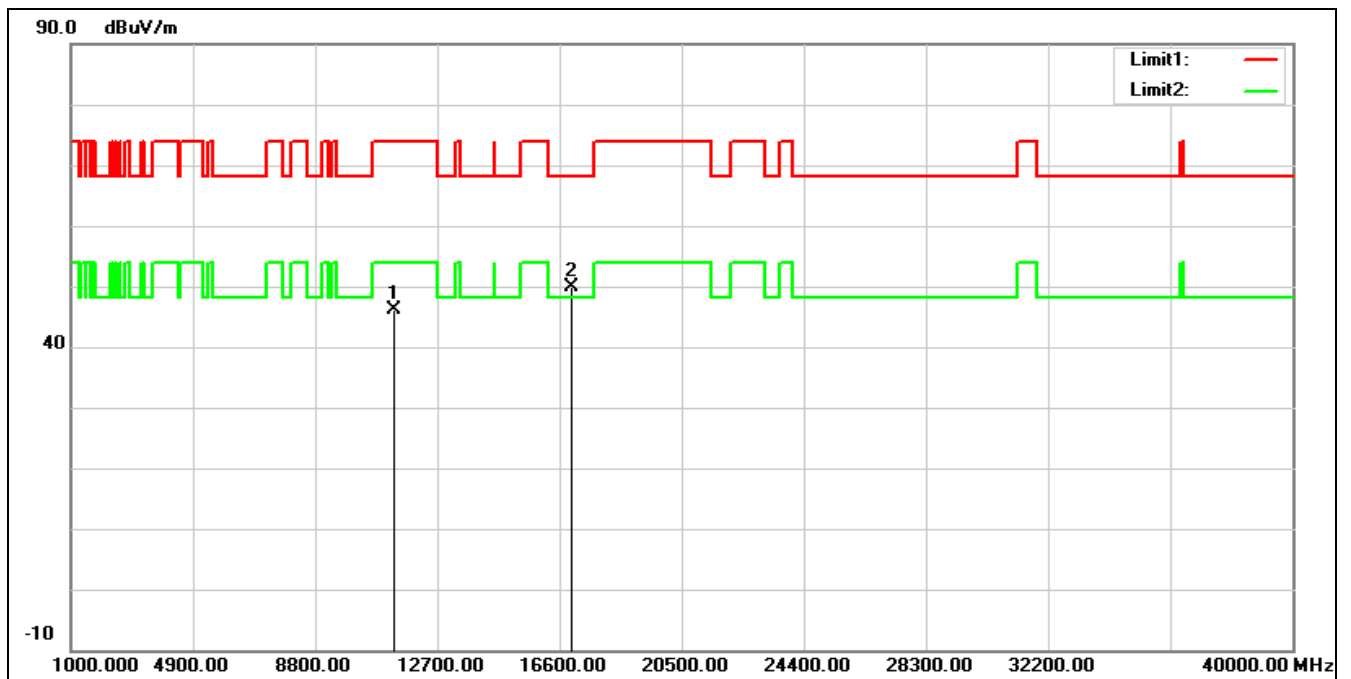


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	31.66	14.50	46.16	74.00	-27.84	peak
2*	17010.000	29.71	20.06	49.77	68.20	-18.43	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5670 MHz

Remark:

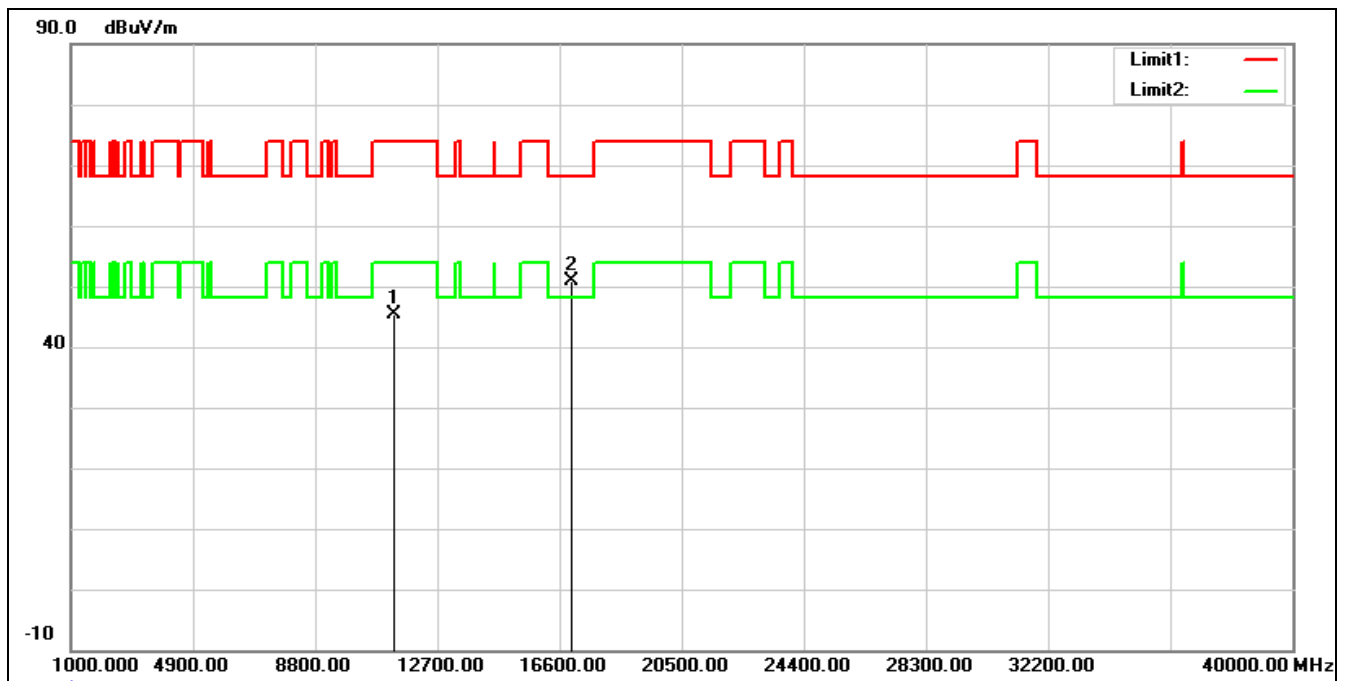


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	30.92	14.50	45.42	74.00	-28.58	peak
2*	17010.000	30.86	20.06	50.92	68.20	-17.28	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5710 MHz
Remark:

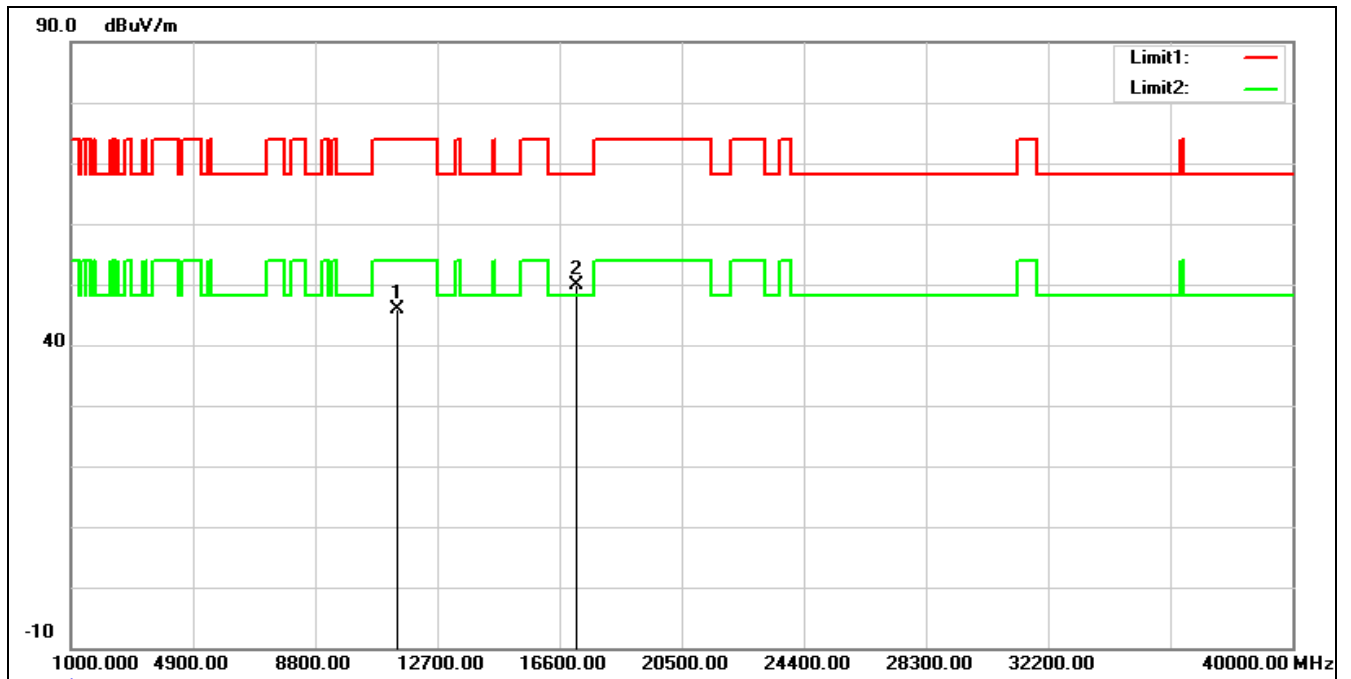


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	31.11	14.75	45.86	74.00	-28.14	peak
2*	17130.000	29.00	20.77	49.77	68.20	-18.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5710 MHz		
Remark:			

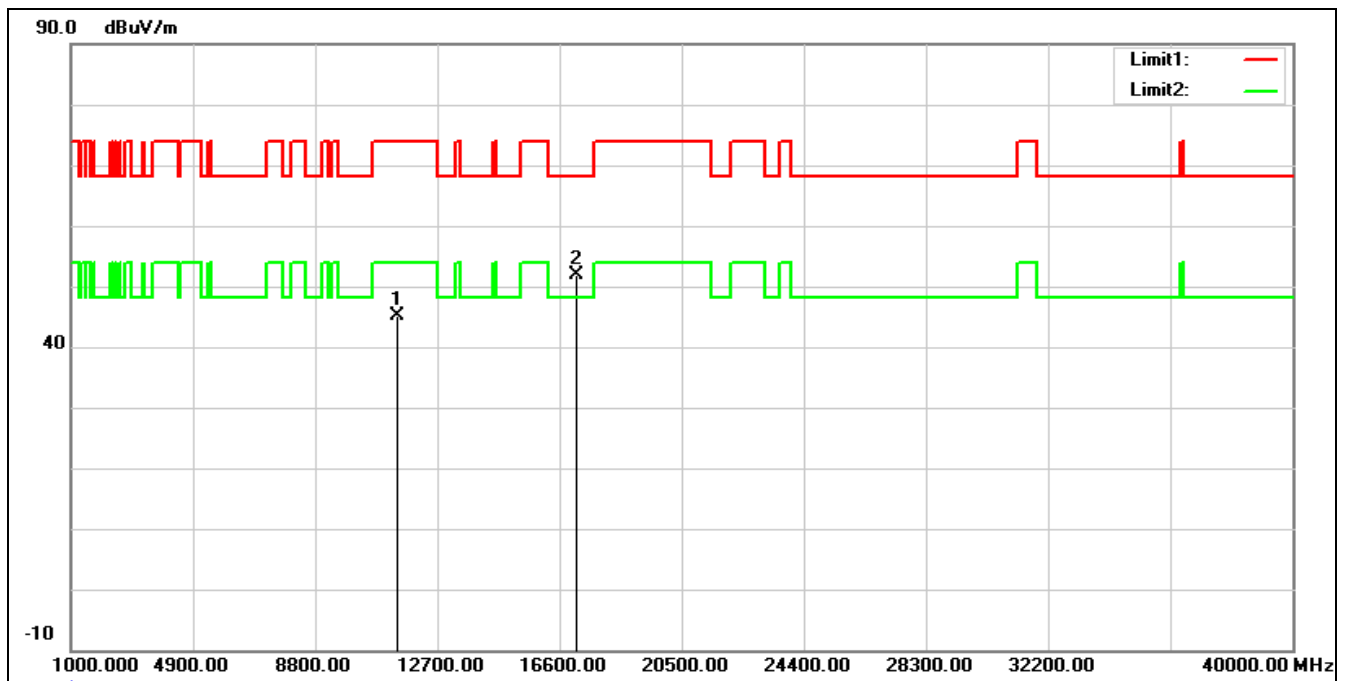


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11420.000	30.34	14.75	45.09	74.00	-28.91	peak
2*	17130.000	31.23	20.77	52.00	68.20	-16.20	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5755 MHz		
Remark:			

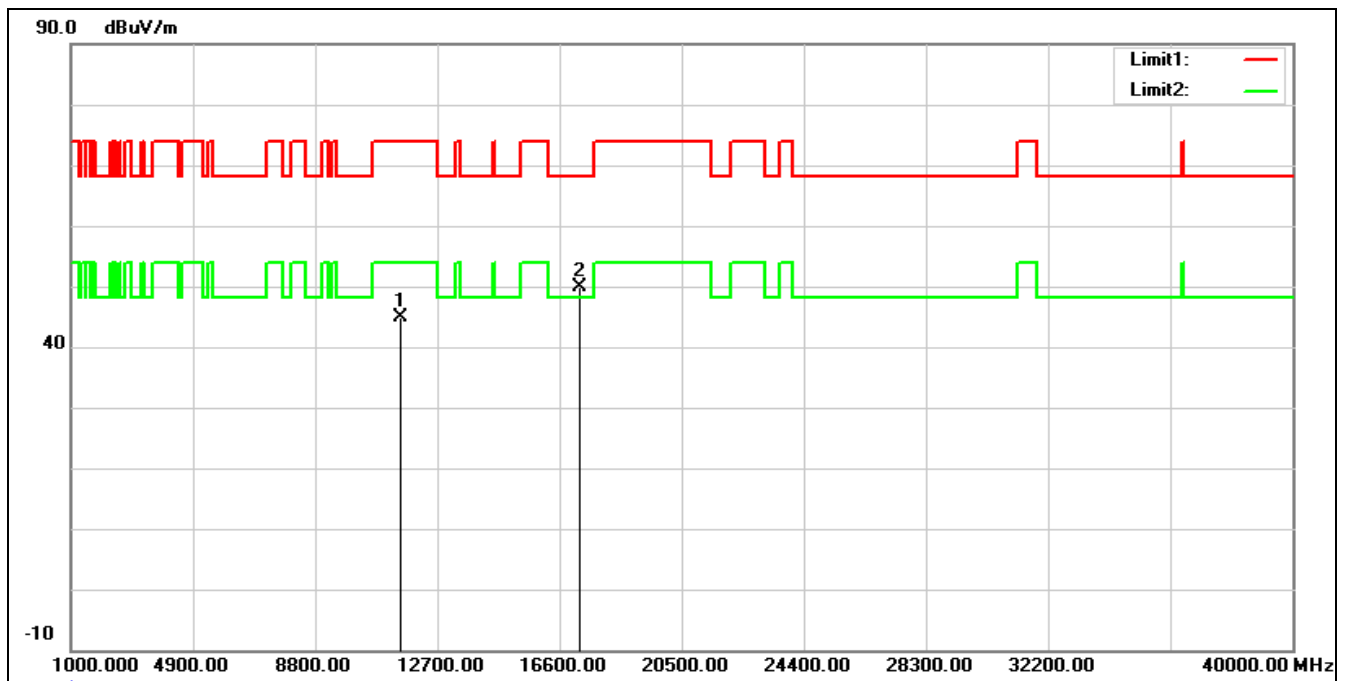


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	29.88	15.09	44.97	74.00	-29.03	peak
2*	17265.000	28.12	21.79	49.91	68.20	-18.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5755 MHz		
Remark:			

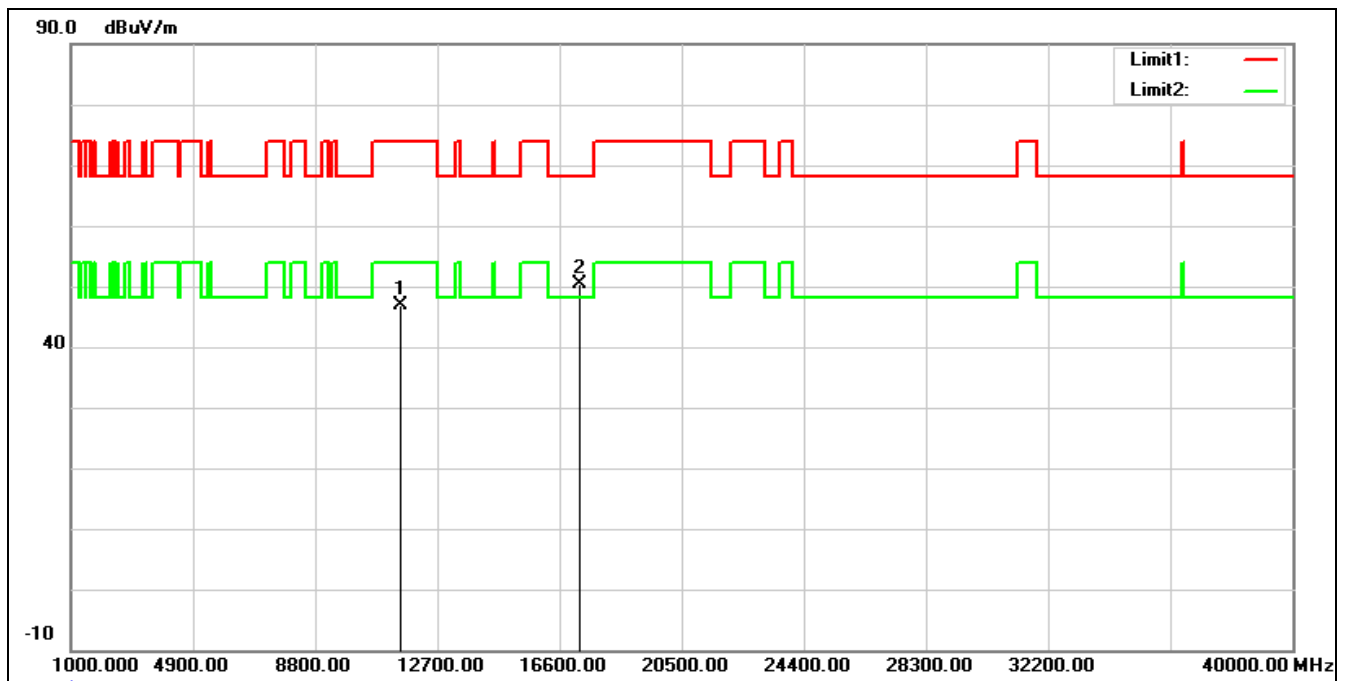


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	31.71	15.09	46.80	74.00	-27.20	peak
2*	17265.000	28.50	21.79	50.29	68.20	-17.91	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5795 MHz
Remark:

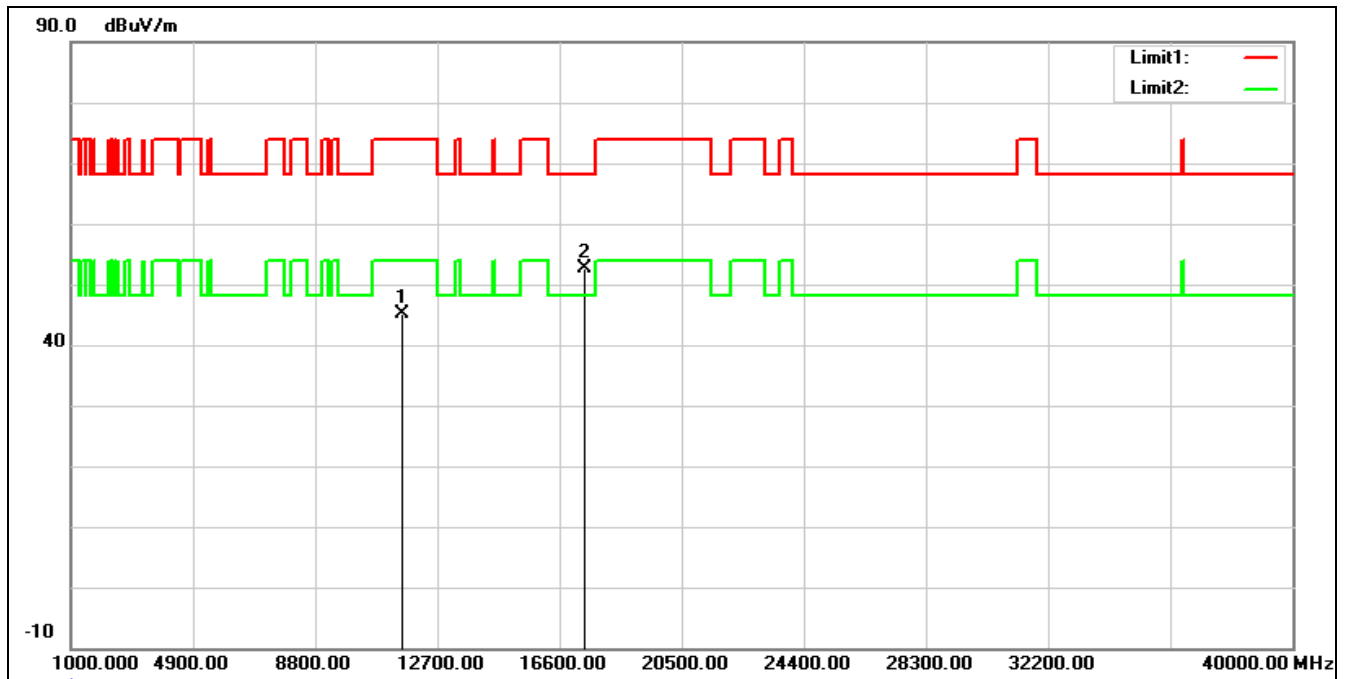


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	30.29	14.76	45.05	74.00	-28.95	peak
2*	17385.000	30.19	22.48	52.67	68.20	-15.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5795 MHz		
Remark:			

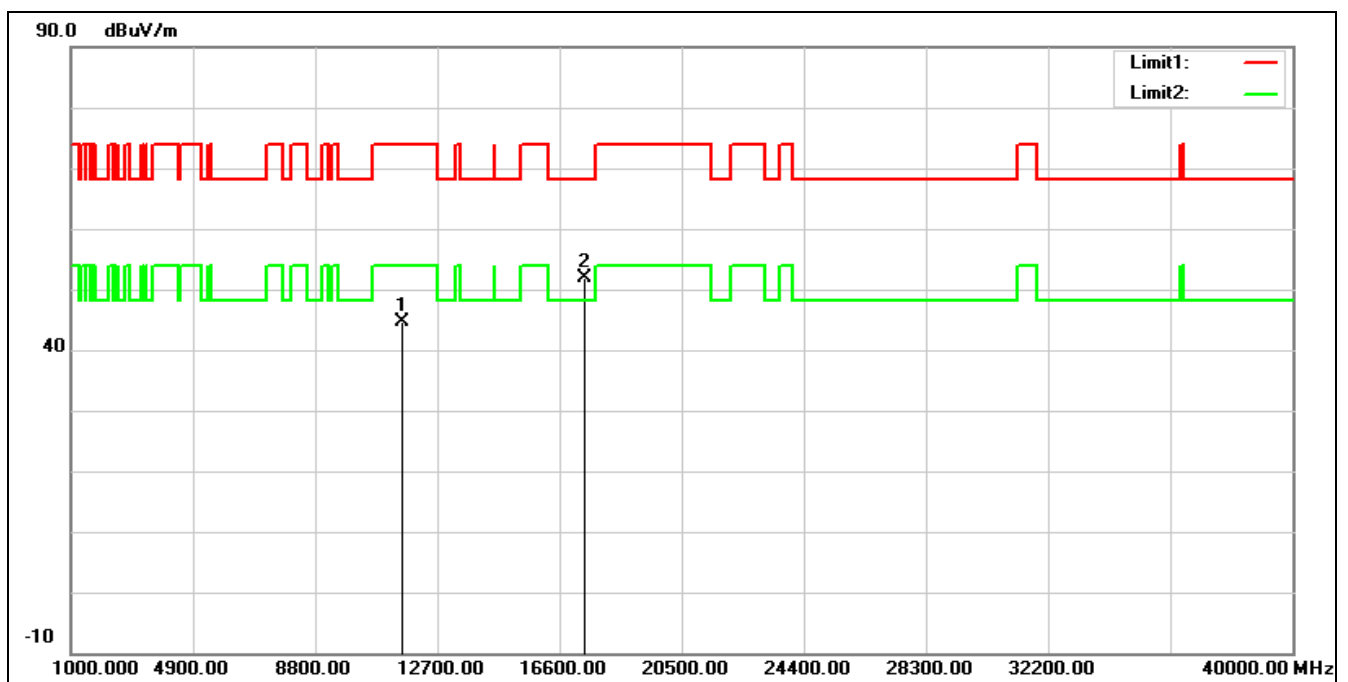


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	29.90	14.76	44.66	74.00	-29.34	peak
2*	17385.000	29.48	22.48	51.96	68.20	-16.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

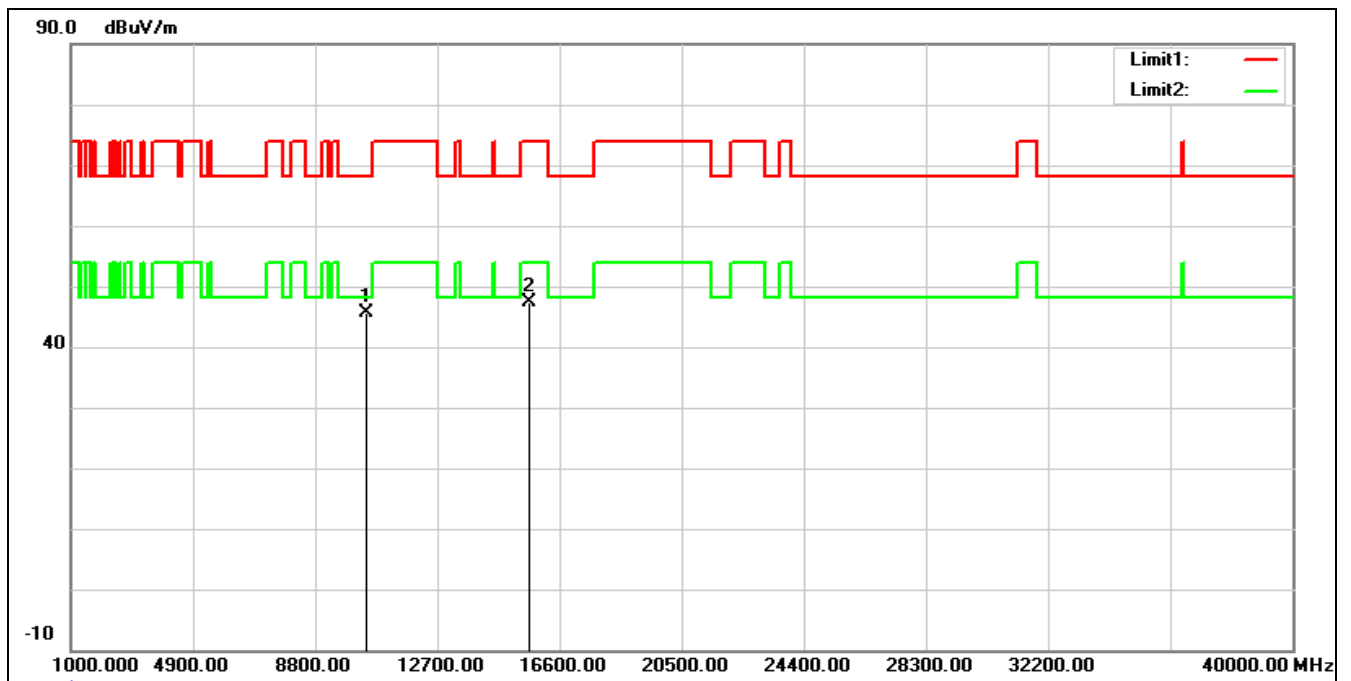

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	32.19	13.53	45.72	68.20	-22.48	peak
2	15630.000	30.70	16.64	47.34	74.00	-26.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5210 MHz		
Remark:			

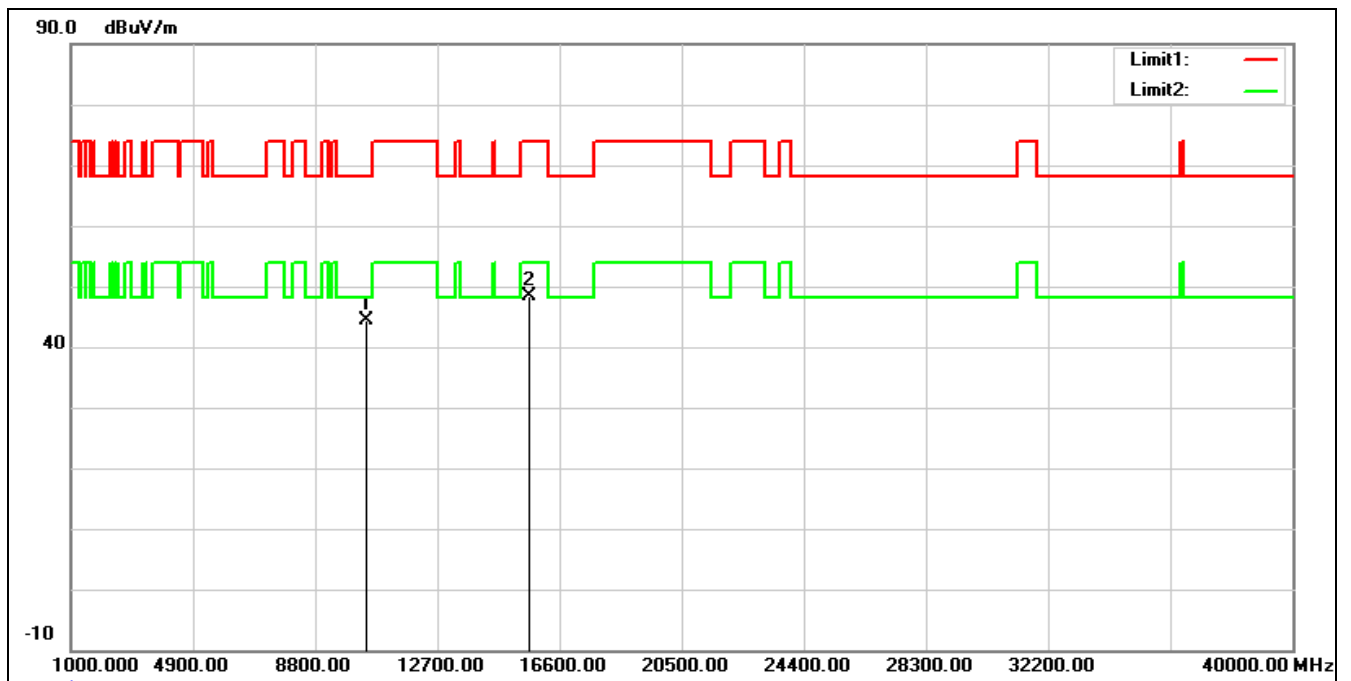


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10420.000	30.92	13.53	44.45	68.20	-23.75	peak
2	15630.000	31.81	16.64	48.45	74.00	-25.55	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT80 5290 MHz

Remark:

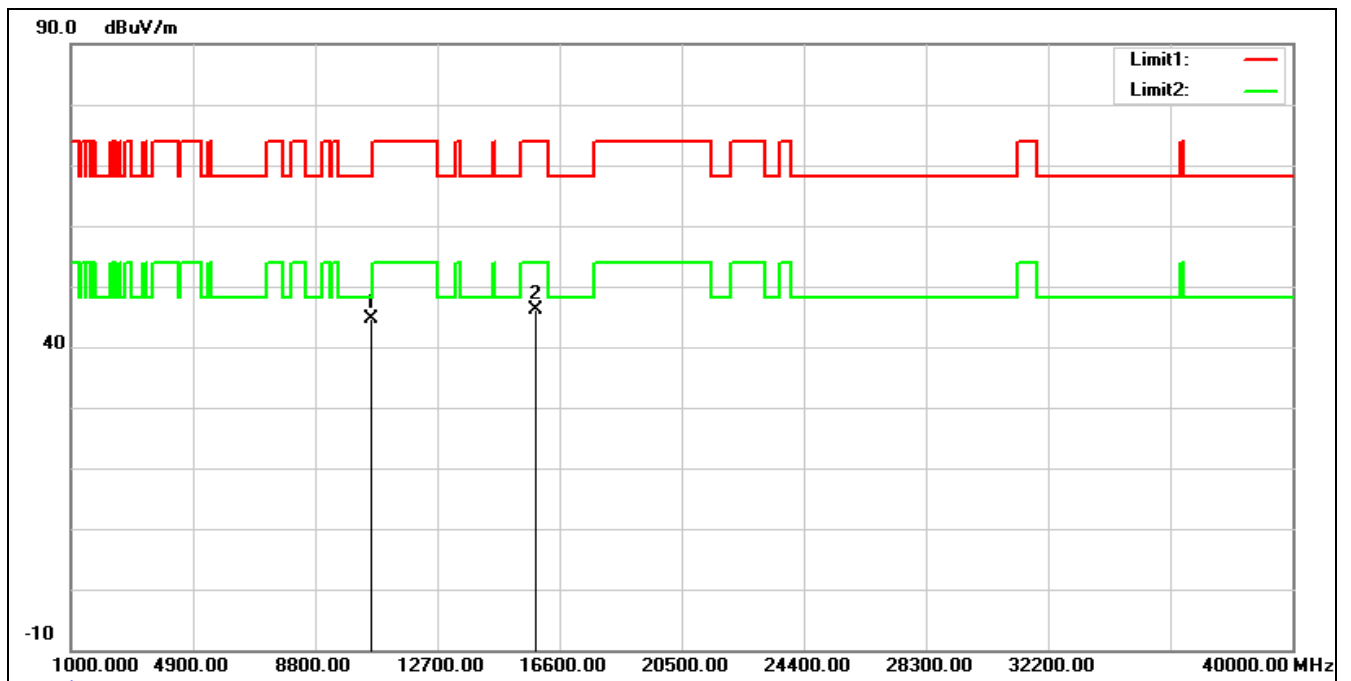

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	30.93	13.63	44.56	68.20	-23.64	peak
2	15870.000	29.71	16.31	46.02	74.00	-27.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5290 MHz		
Remark:			

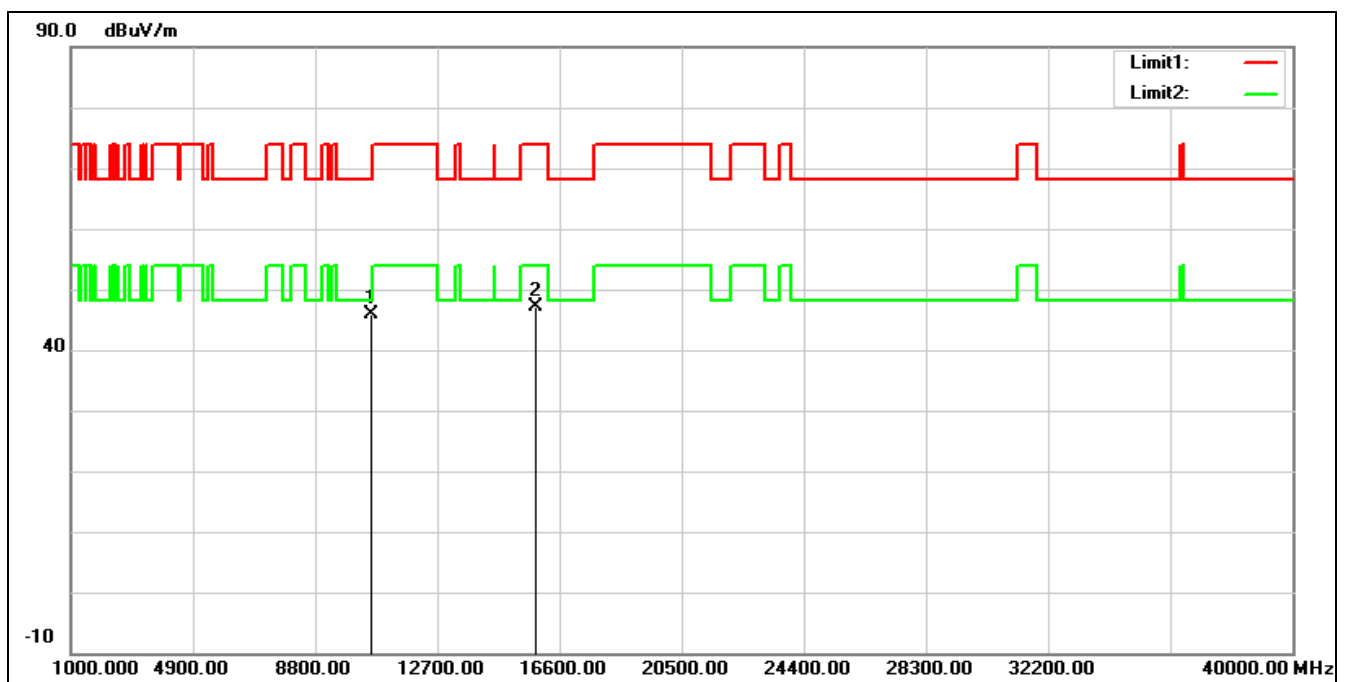


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10580.000	32.26	13.63	45.89	68.20	-22.31	peak
2	15870.000	30.77	16.31	47.08	74.00	-26.92	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT80 5530 MHz

Remark:

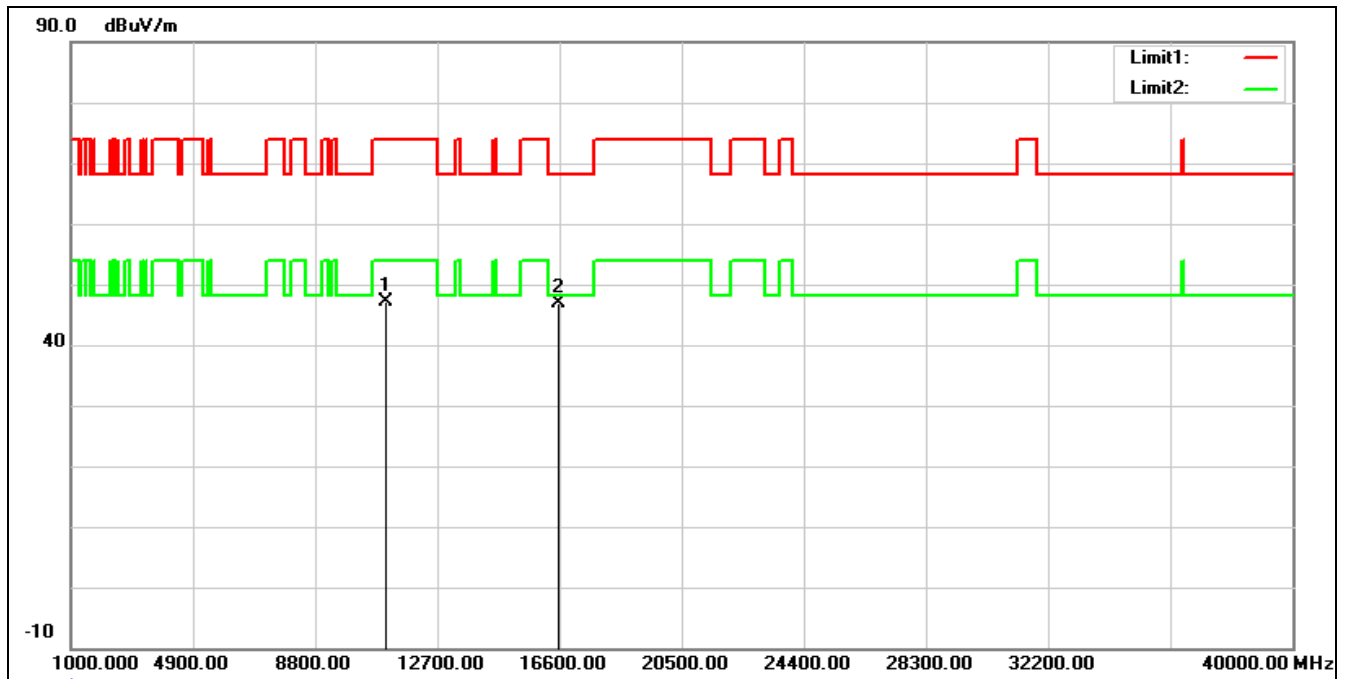


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	32.78	14.46	47.24	74.00	-26.76	peak
2*	16590.000	29.43	17.34	46.77	68.20	-21.43	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT80 5530 MHz

Remark:

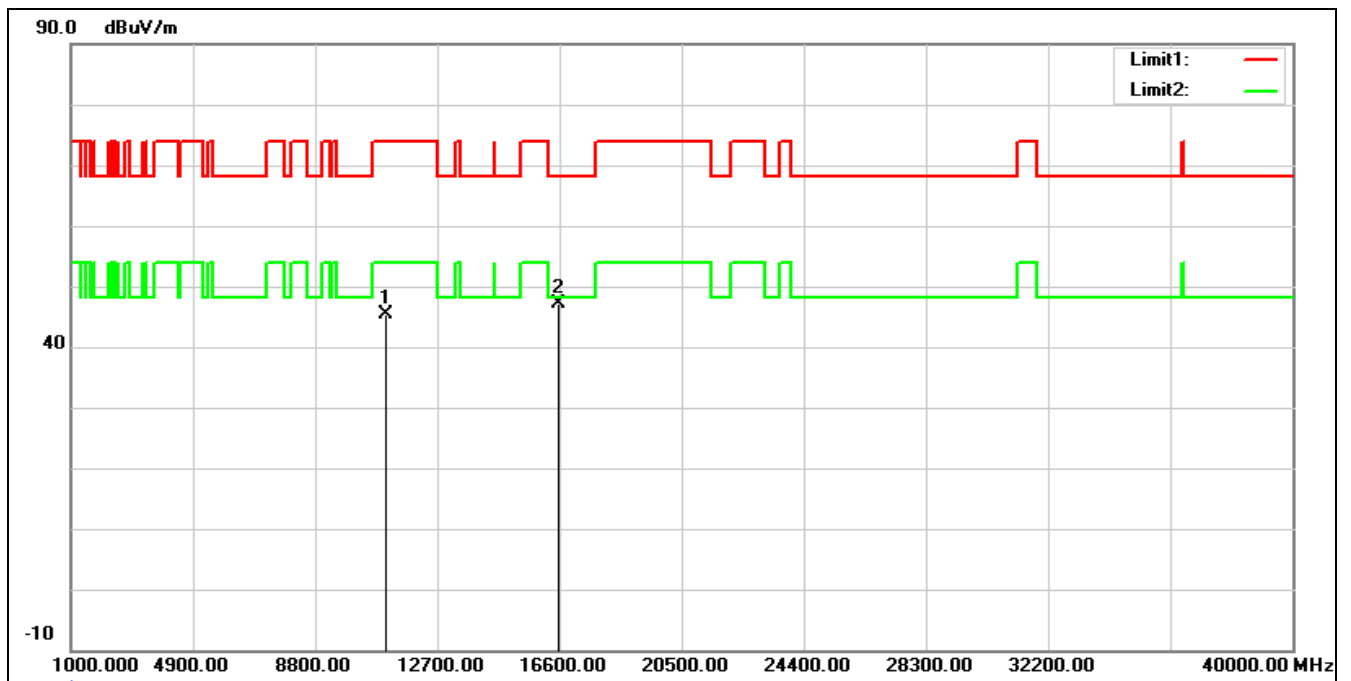


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11060.000	30.99	14.46	45.45	74.00	-28.55	peak
2*	16590.000	29.72	17.34	47.06	68.20	-21.14	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT80 5610 MHz

Remark:

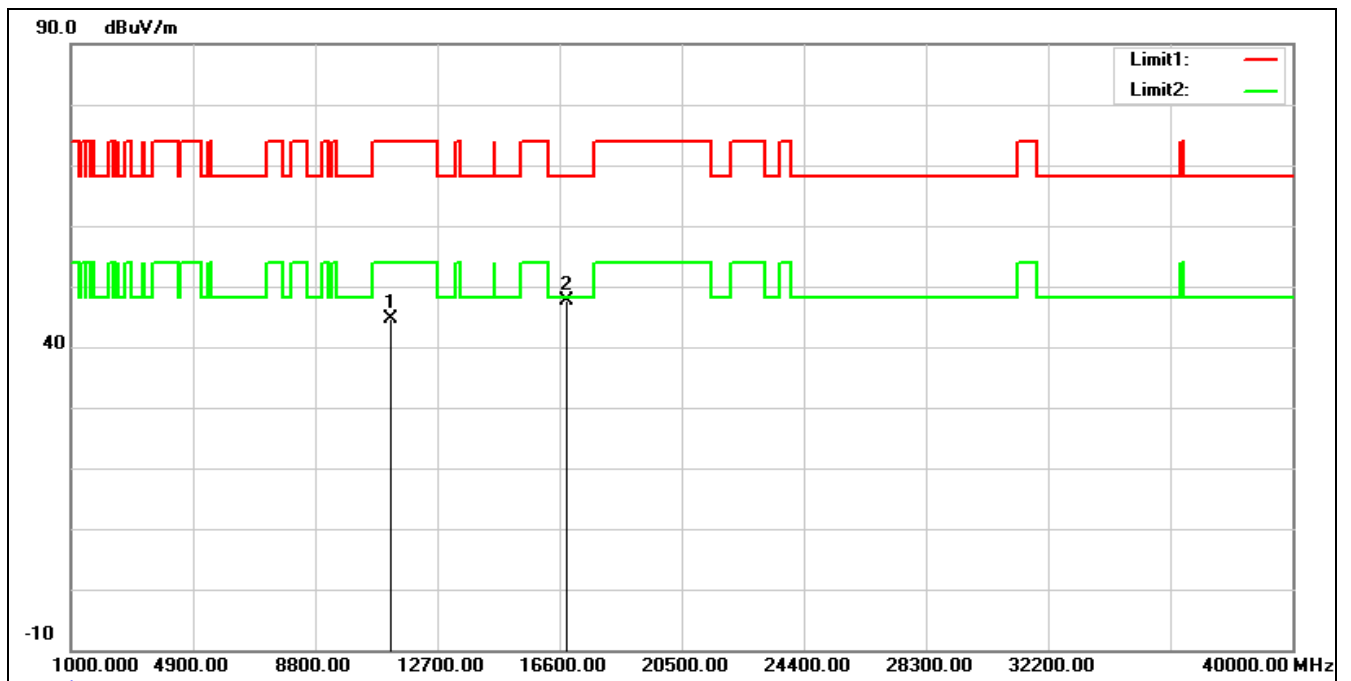


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	30.40	14.34	44.74	74.00	-29.26	peak
2*	16830.000	28.65	19.08	47.73	68.20	-20.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT80 5610 MHz

Remark:

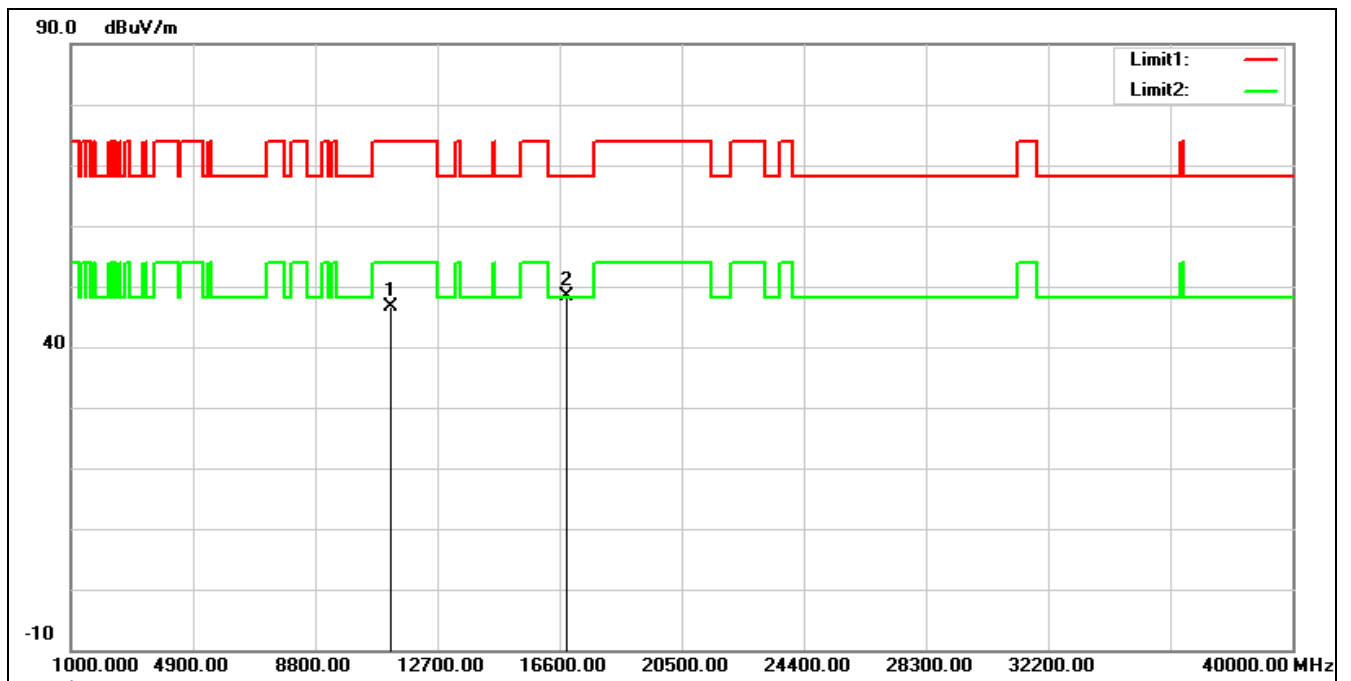


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11220.000	32.32	14.34	46.66	74.00	-27.34	peak
2*	16830.000	29.30	19.08	48.38	68.20	-19.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5690 MHz		
Remark:			

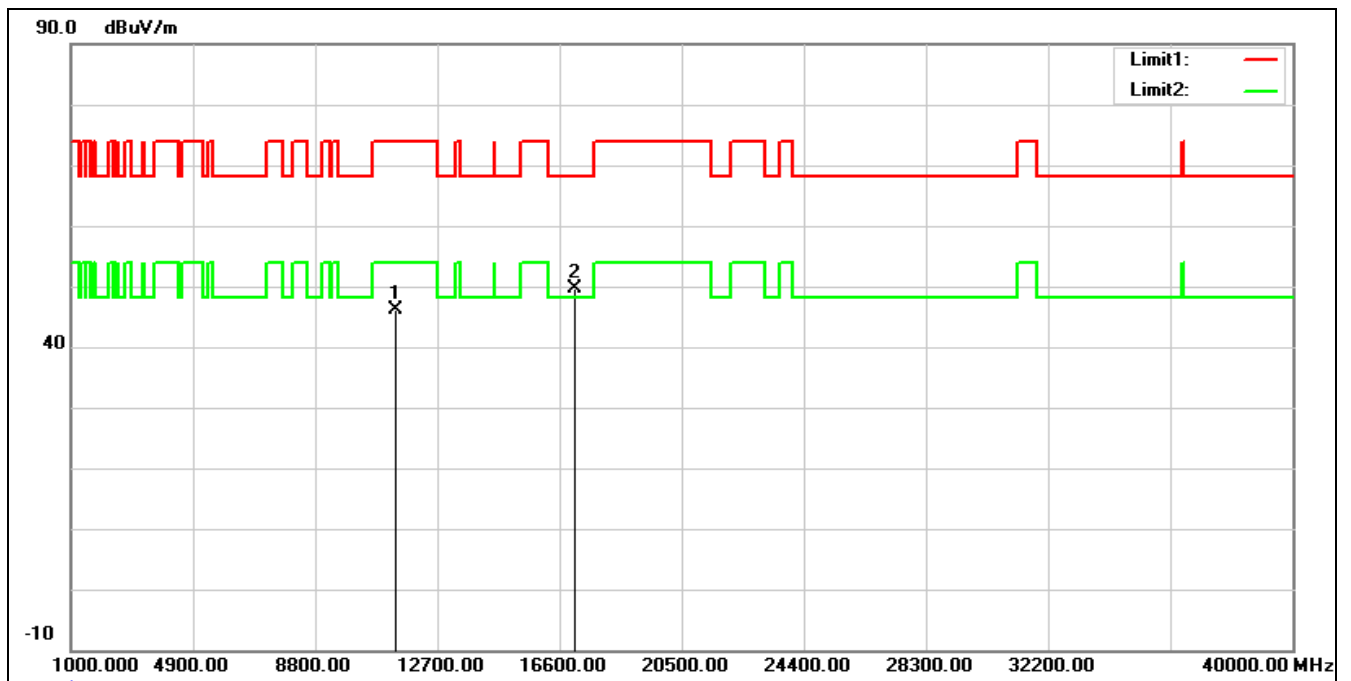


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	31.60	14.60	46.20	74.00	-27.80	peak
2*	17070.000	29.25	20.40	49.65	68.20	-18.55	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 5690 MHz
Remark:

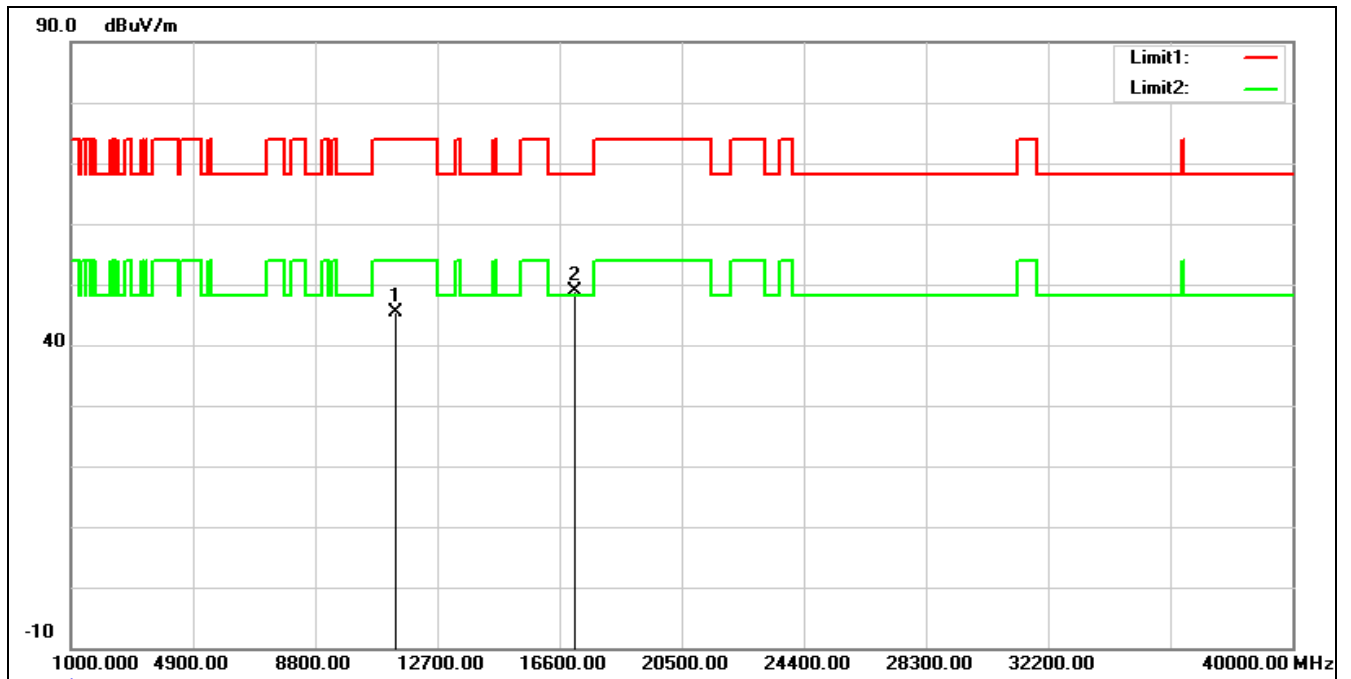

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11380.000	30.85	14.60	45.45	74.00	-28.55	peak
2*	17070.000	28.51	20.40	48.91	68.20	-19.29	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT80 5775 MHz
Remark:

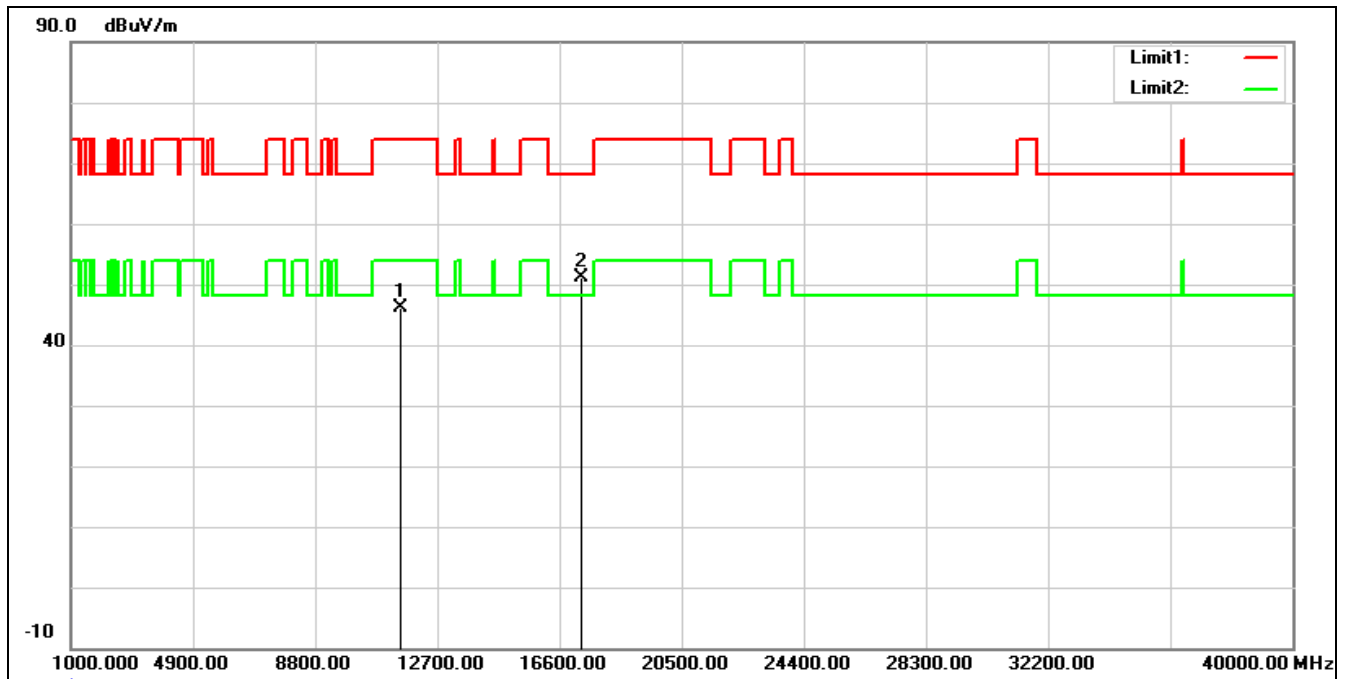


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	31.17	14.92	46.09	74.00	-27.91	peak
2*	17325.000	28.88	22.20	51.08	68.20	-17.12	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT80 5775 MHz

Remark:

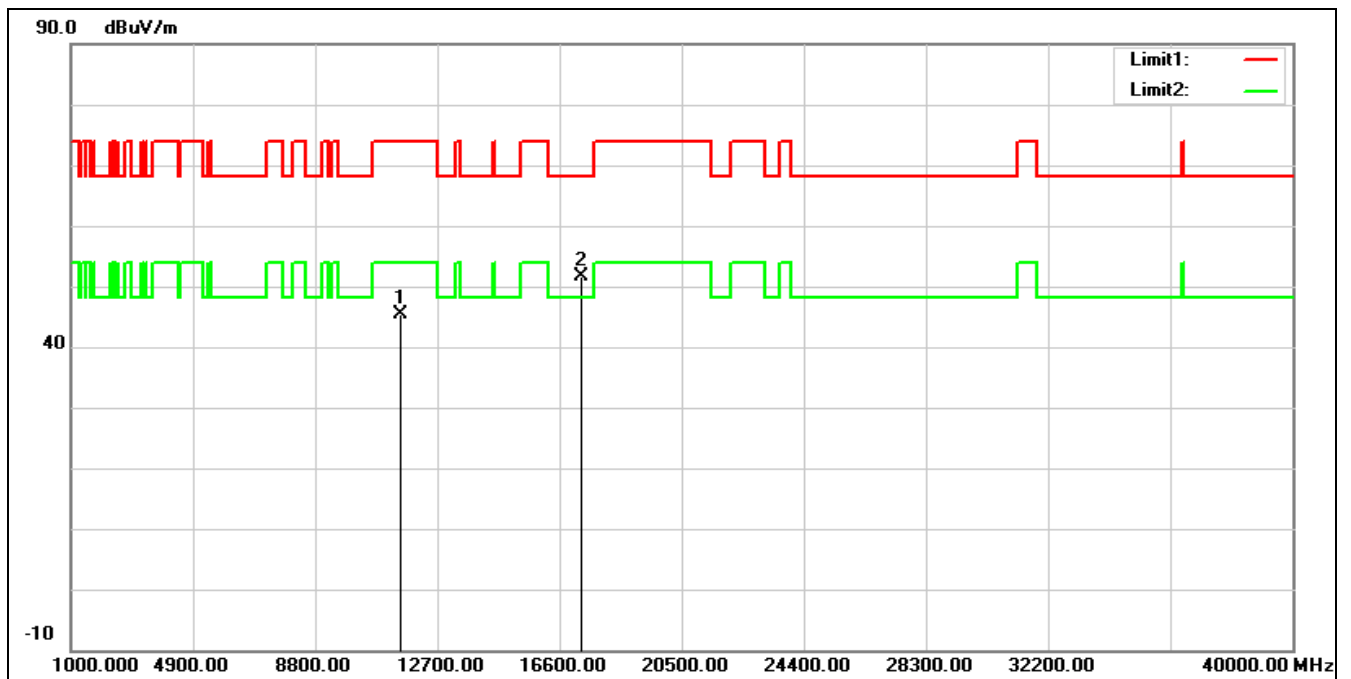


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	30.56	14.92	45.48	74.00	-28.52	peak
2*	17325.000	29.37	22.20	51.57	68.20	-16.63	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT160 5250 MHz

Remark:

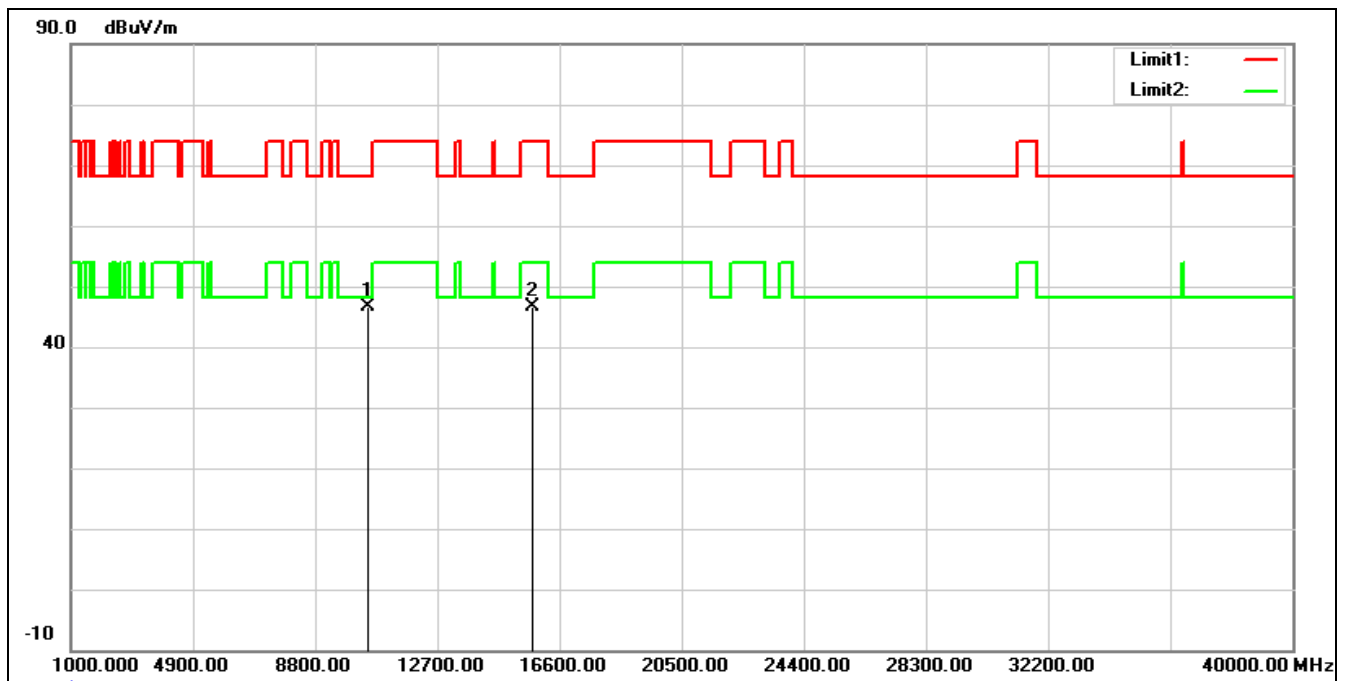


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	33.02	13.60	46.62	68.20	-21.58	peak
2	15750.000	30.08	16.55	46.63	74.00	-27.37	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT160 5250 MHz
Remark:

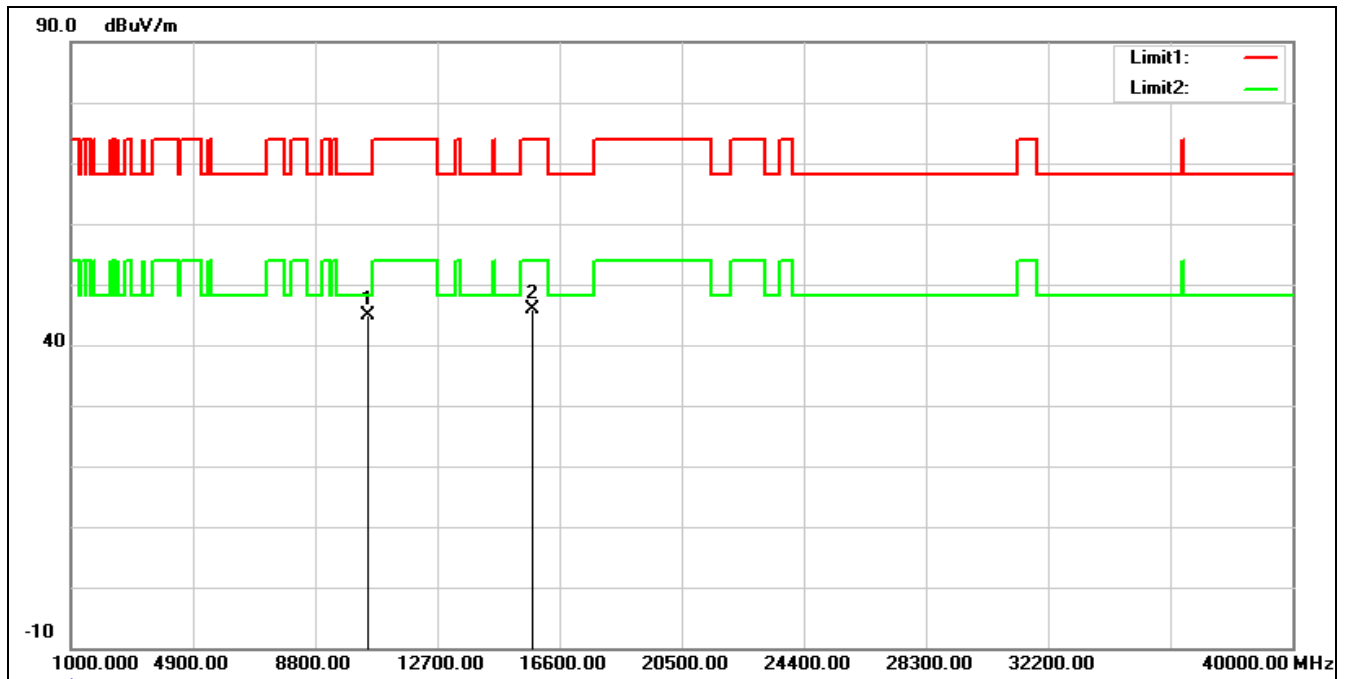

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	10500.000	31.26	13.60	44.86	68.20	-23.34	peak
2	15750.000	29.41	16.55	45.96	74.00	-28.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 5570 MHz		
Remark:			

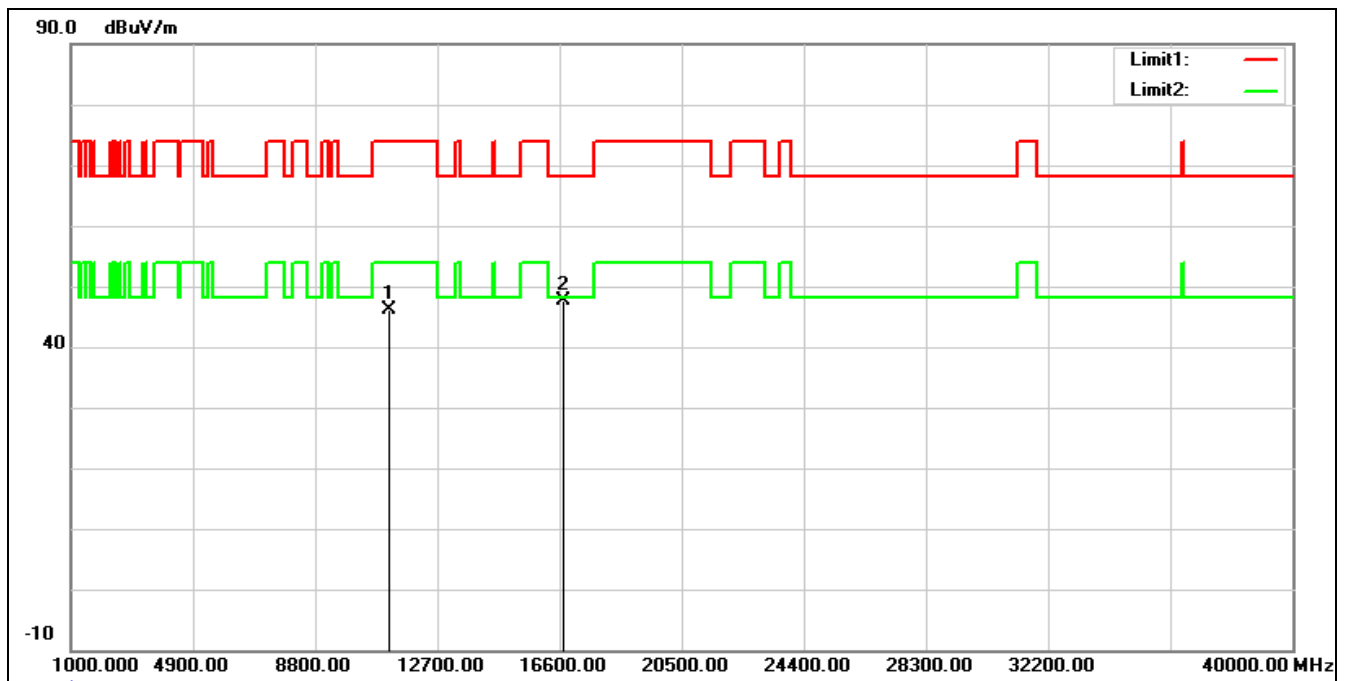


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	31.65	14.47	46.12	74.00	-27.88	peak
2*	16710.000	29.39	18.12	47.51	68.20	-20.69	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT160 5570 MHz

Remark:

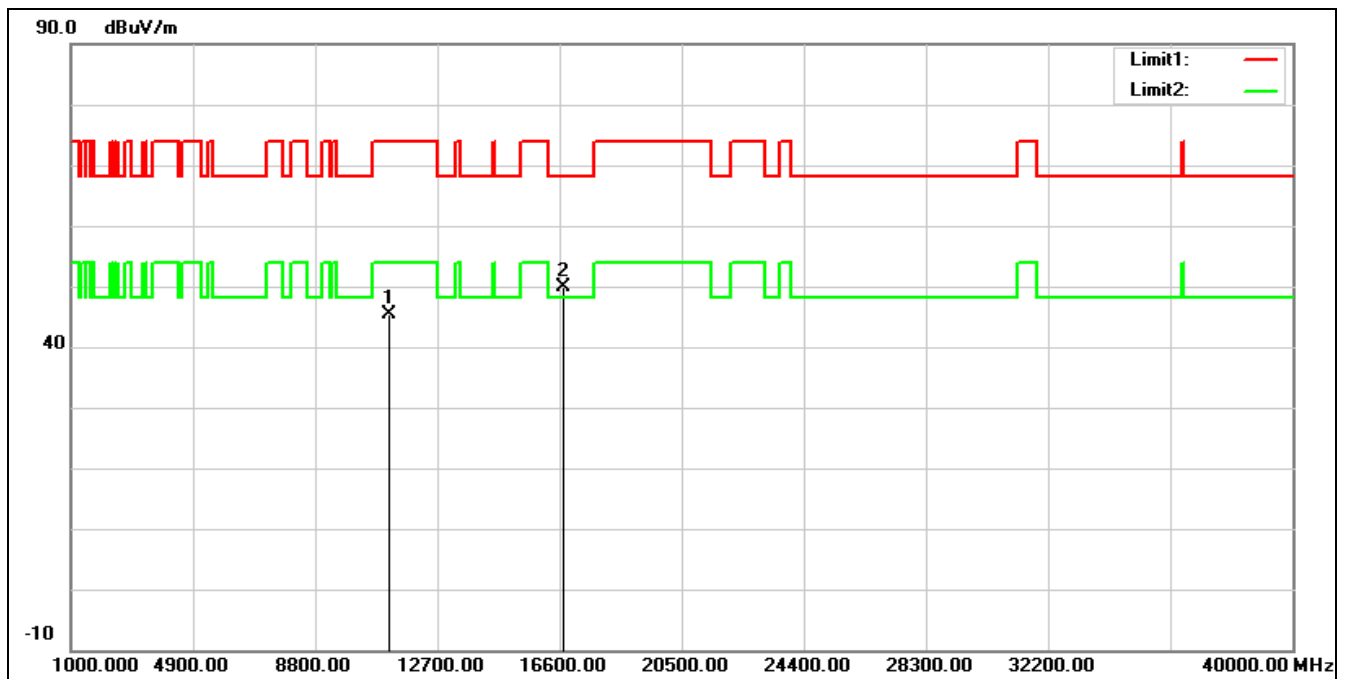


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11140.000	30.95	14.47	45.42	74.00	-28.58	peak
2*	16710.000	31.78	18.12	49.90	68.20	-18.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

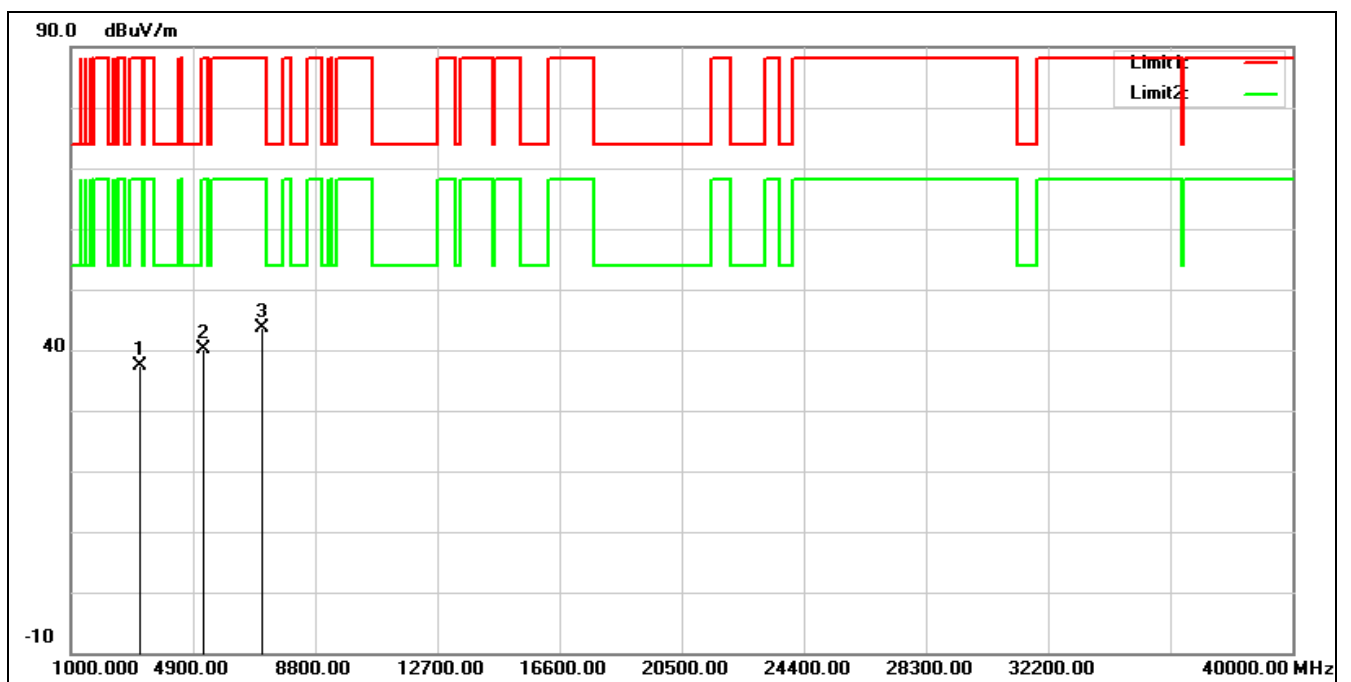

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3159.000	41.56	-4.16	37.40	88.20	-50.80	peak
2	5182.000	39.02	1.23	40.25	88.20	-47.95	peak
3*	7103.000	36.95	6.63	43.58	88.20	-44.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

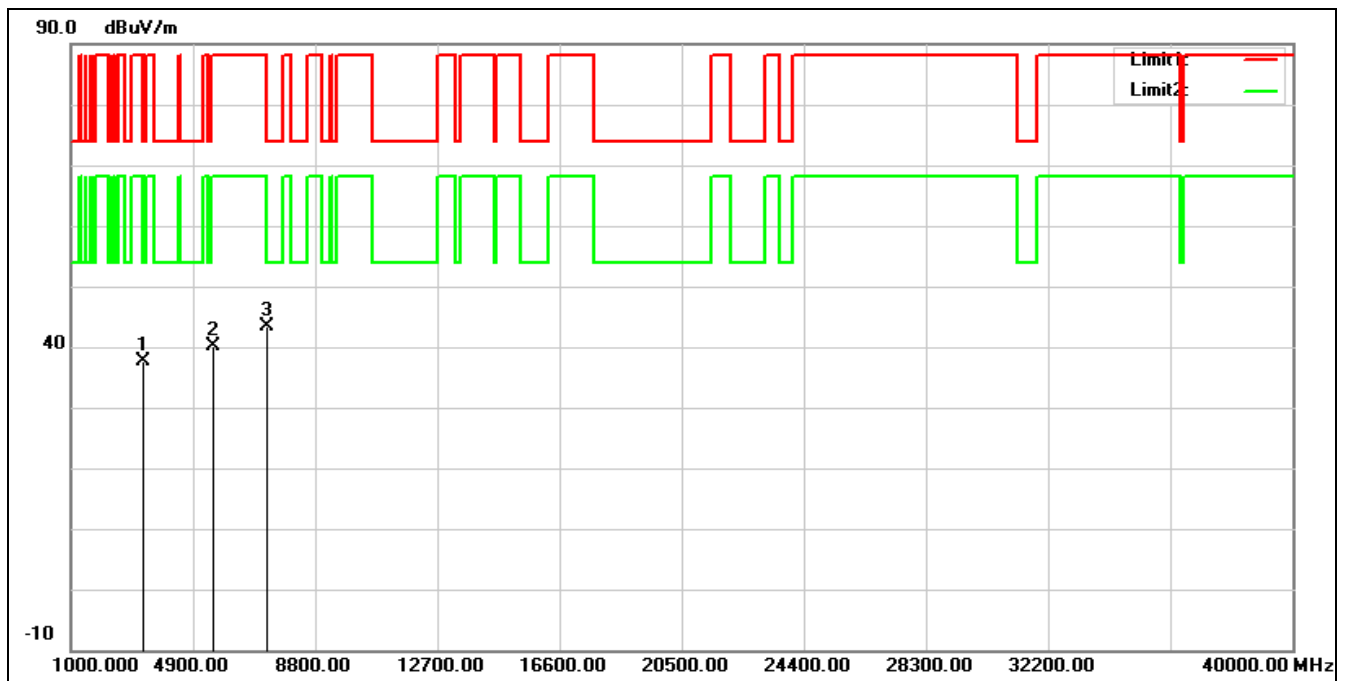

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3278.000	42.06	-4.48	37.58	88.20	-50.62	peak
2	5505.000	38.40	1.79	40.19	88.20	-48.01	peak
3*	7239.000	36.27	7.15	43.42	88.20	-44.78	peak

Band Edge


Peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5180 MHz

Remark:

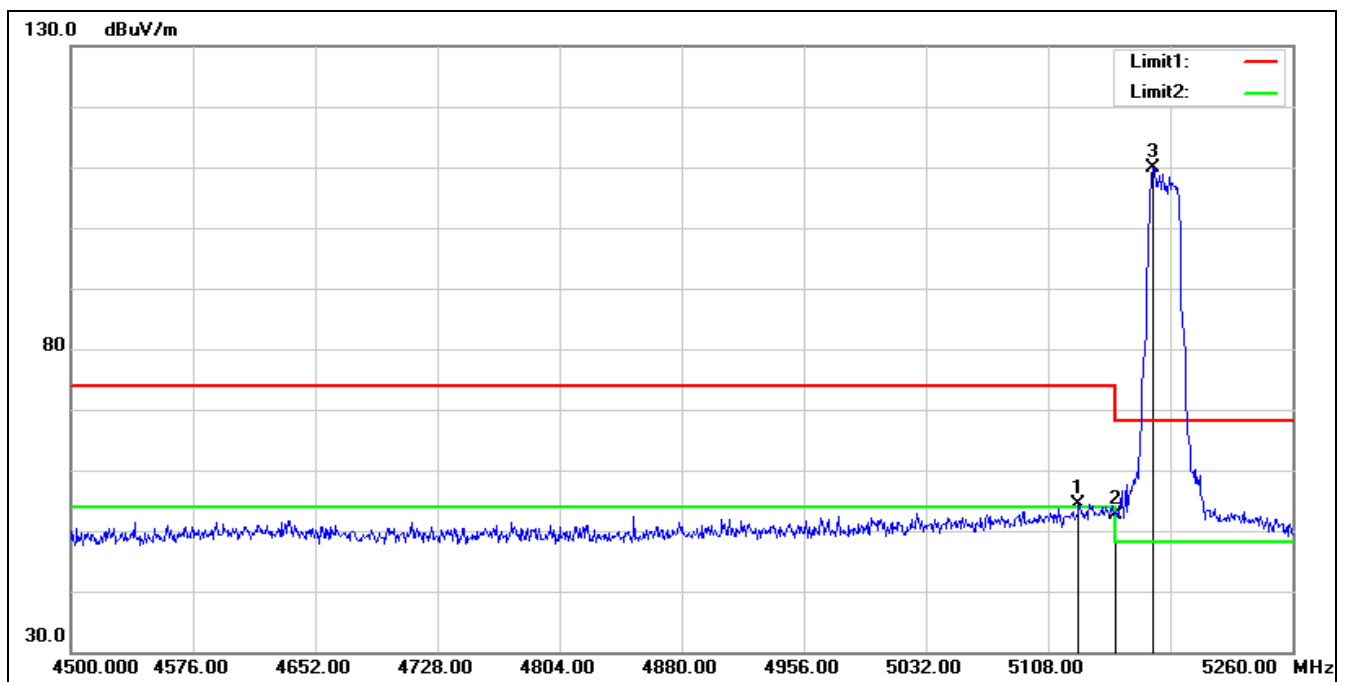


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.000	53.09	1.40	54.49	74.00	-19.51	peak
2	5150.000	51.26	1.38	52.64	74.00	-21.36	peak
3*	5173.360	108.71	1.26	109.97	68.20	41.77	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5180 MHz

Remark:

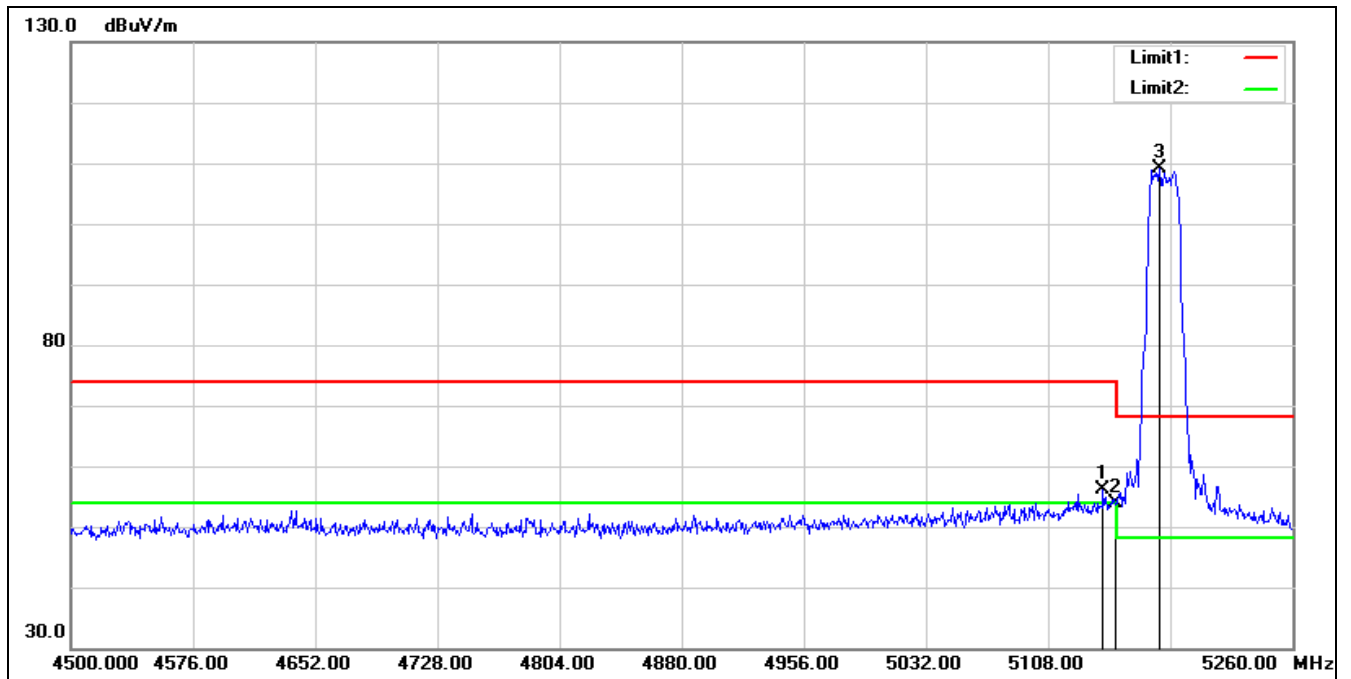


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	54.65	1.39	56.04	74.00	-17.96	peak
2	5150.000	52.42	1.38	53.80	74.00	-20.20	peak
3*	5177.160	107.90	1.26	109.16	68.20	40.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

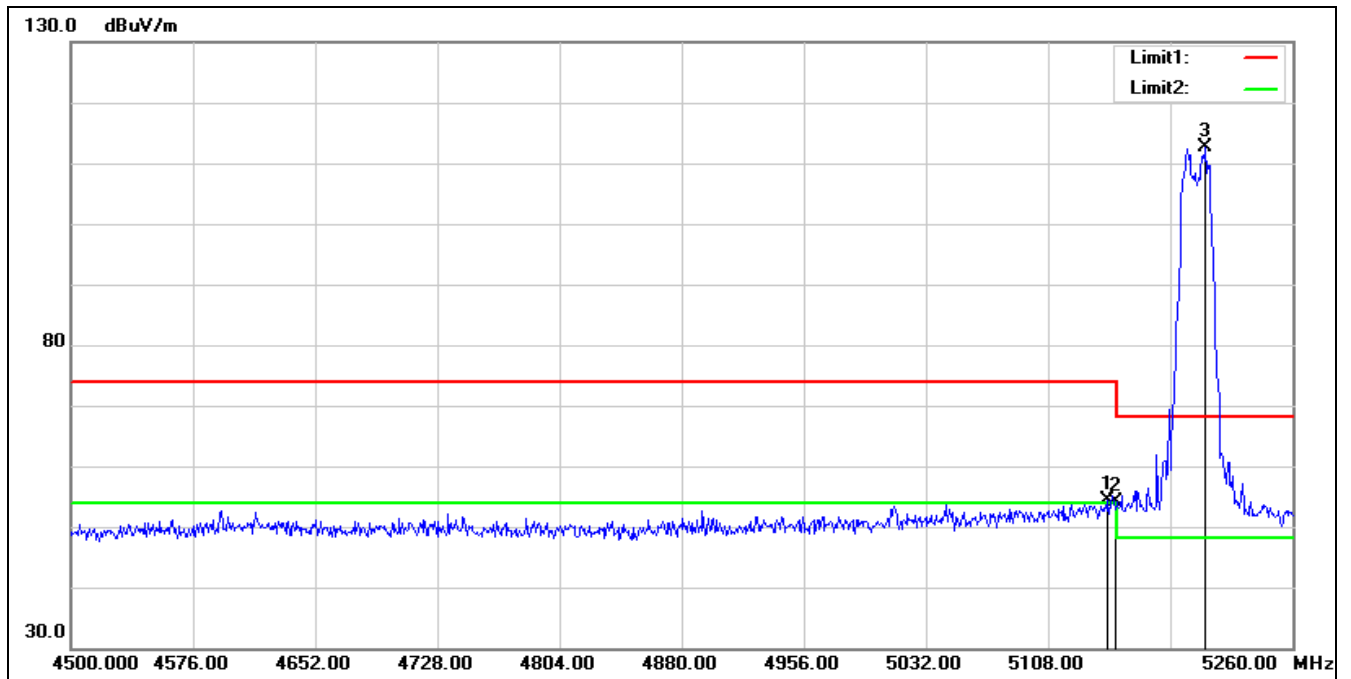

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.240	52.91	1.38	54.29	74.00	-19.71	peak
2	5150.000	52.74	1.38	54.12	74.00	-19.88	peak
3*	5206.040	111.59	1.10	112.69	68.20	44.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5200 MHz		
Remark:			

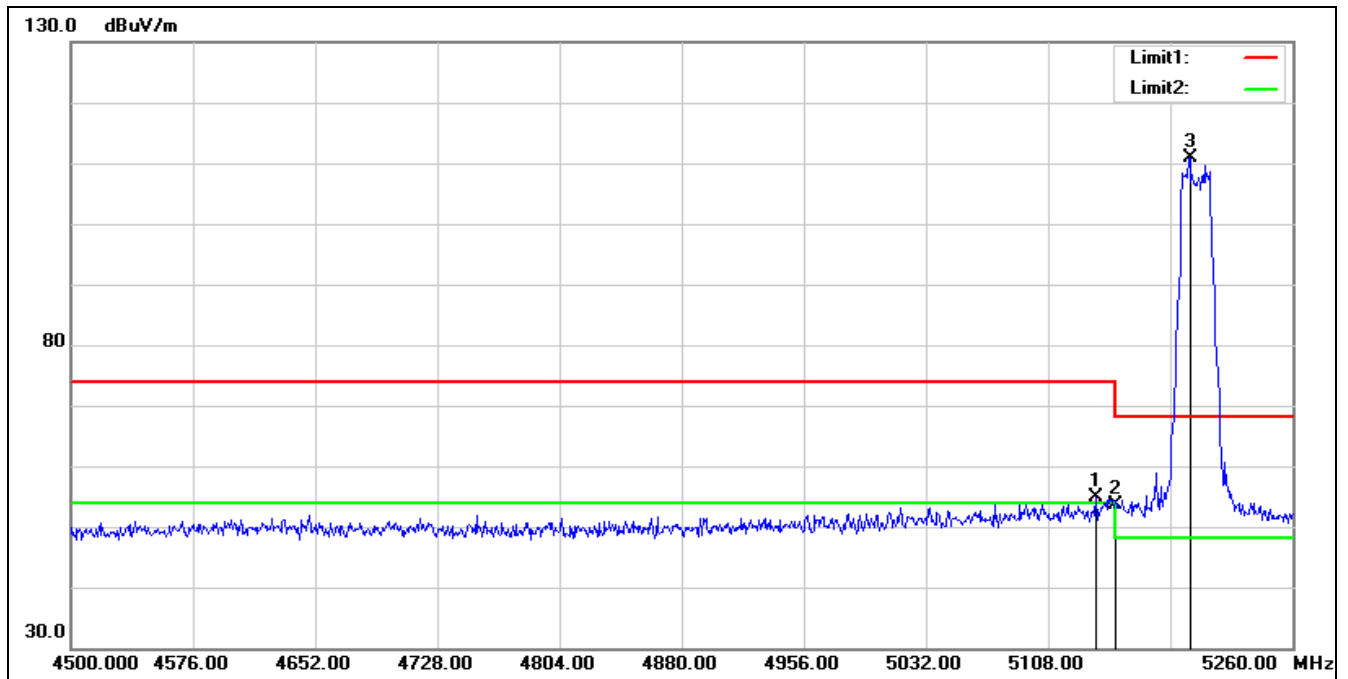


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5137.640	53.44	1.39	54.83	74.00	-19.17	peak
2	5150.000	52.33	1.38	53.71	74.00	-20.29	peak
3*	5196.160	109.78	1.15	110.93	68.20	42.73	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5240 MHz

Remark:

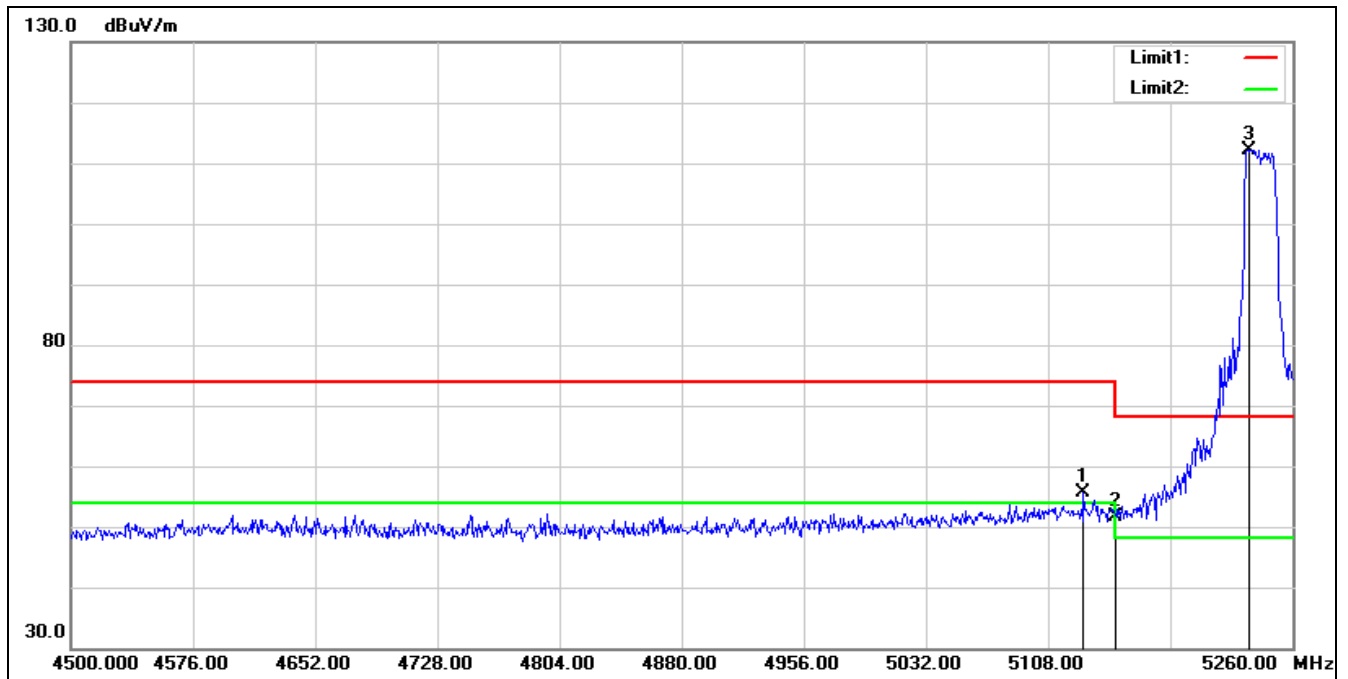


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5130.040	54.14	1.39	55.53	74.00	-18.47	peak
2	5150.000	50.30	1.38	51.68	74.00	-22.32	peak
3*	5232.640	111.32	0.92	112.24	68.20	44.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5240 MHz		
Remark:			

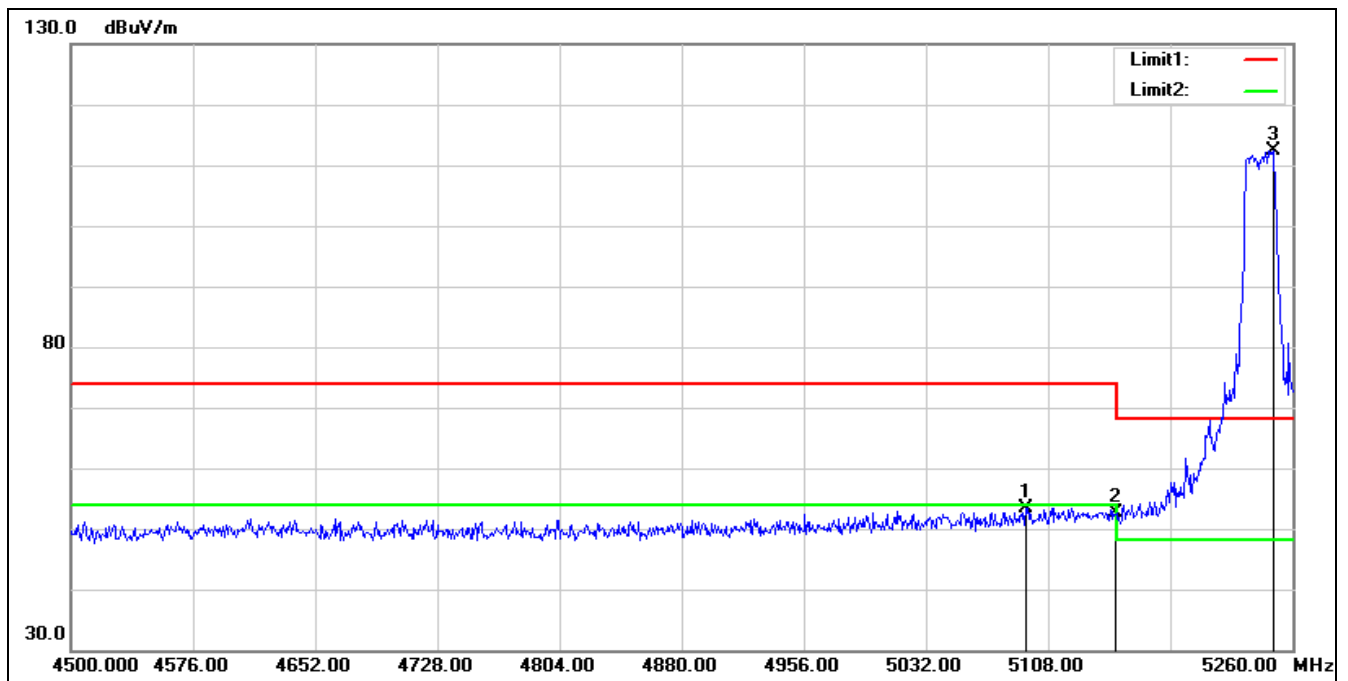


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5094.320	52.02	1.40	53.42	74.00	-20.58	peak
2	5150.000	51.28	1.38	52.66	74.00	-21.34	peak
3*	5247.840	111.47	0.82	112.29	68.20	44.09	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT20 5260 MHz
Remark:

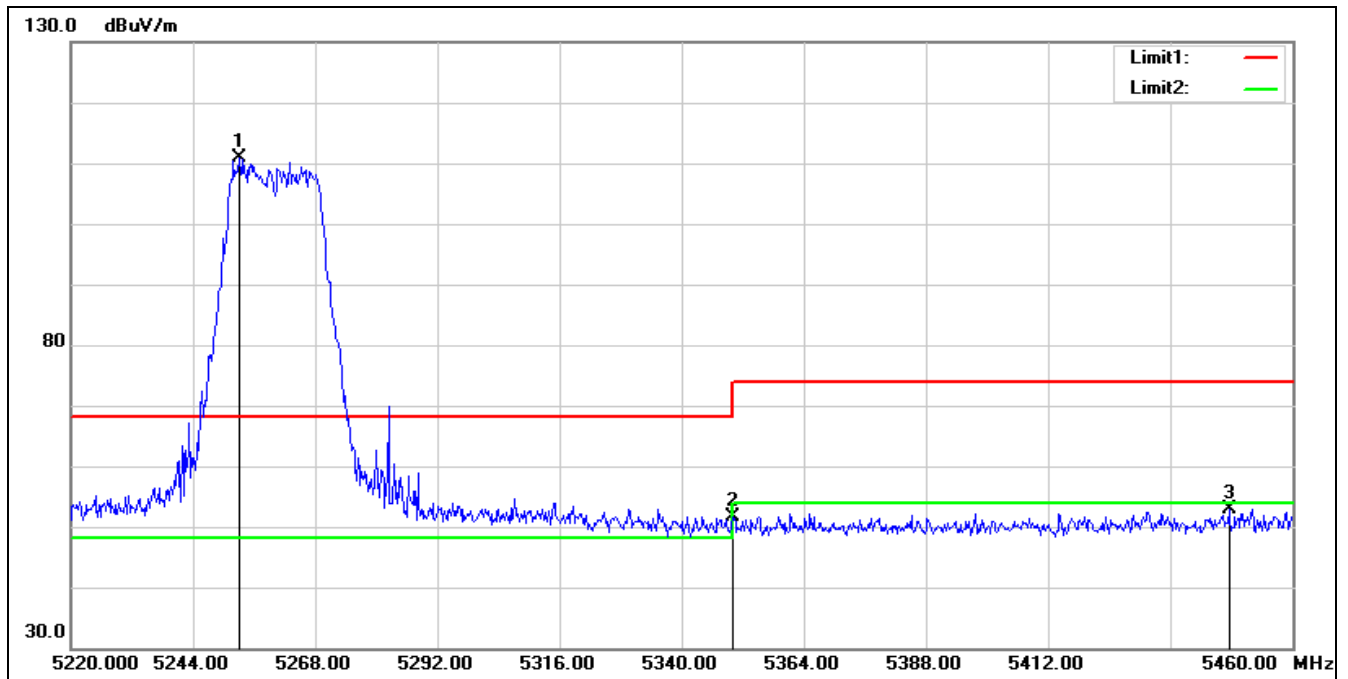

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5253.120	110.07	0.79	110.86	68.20	42.66	peak
2	5350.000	50.70	1.02	51.72	74.00	-22.28	peak
3	5447.520	51.17	1.72	52.89	74.00	-21.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5260 MHz		
Remark:			

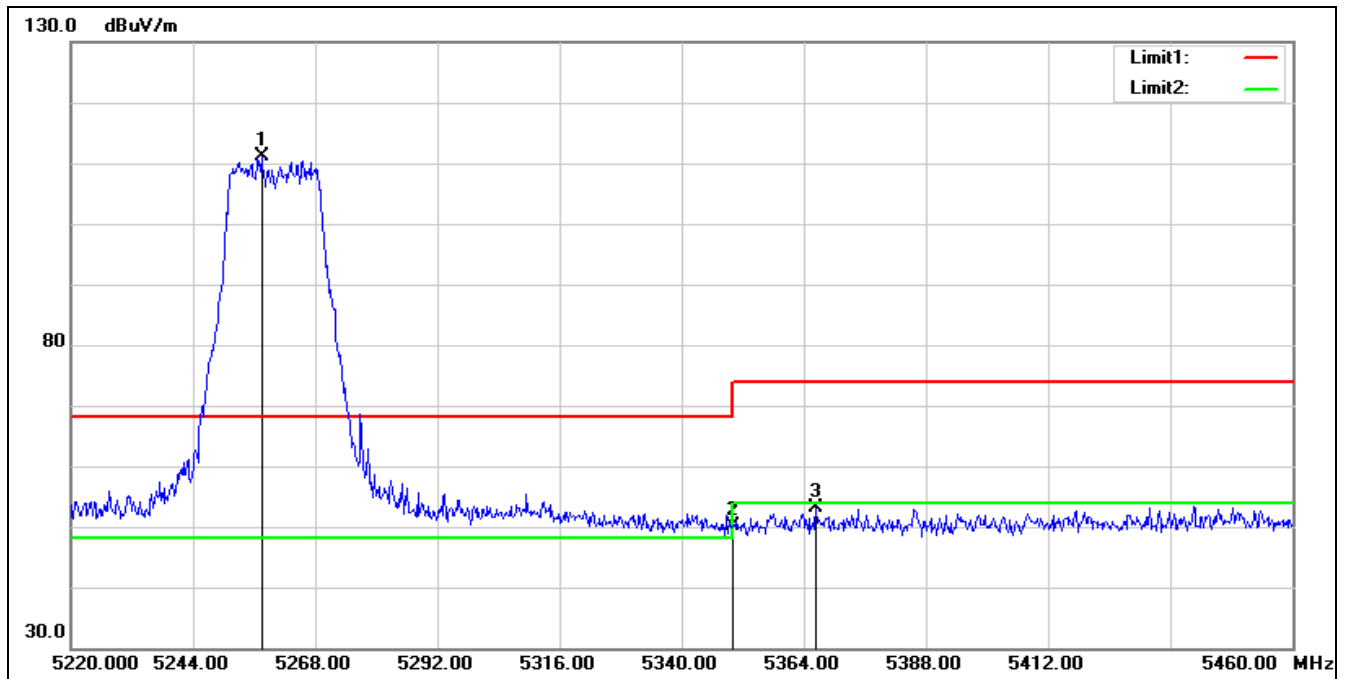


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5257.440	110.35	0.78	111.13	68.20	42.93	peak
2	5350.000	49.03	1.02	50.05	74.00	-23.95	peak
3	5366.400	51.99	1.14	53.13	74.00	-20.87	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5280 MHz

Remark:

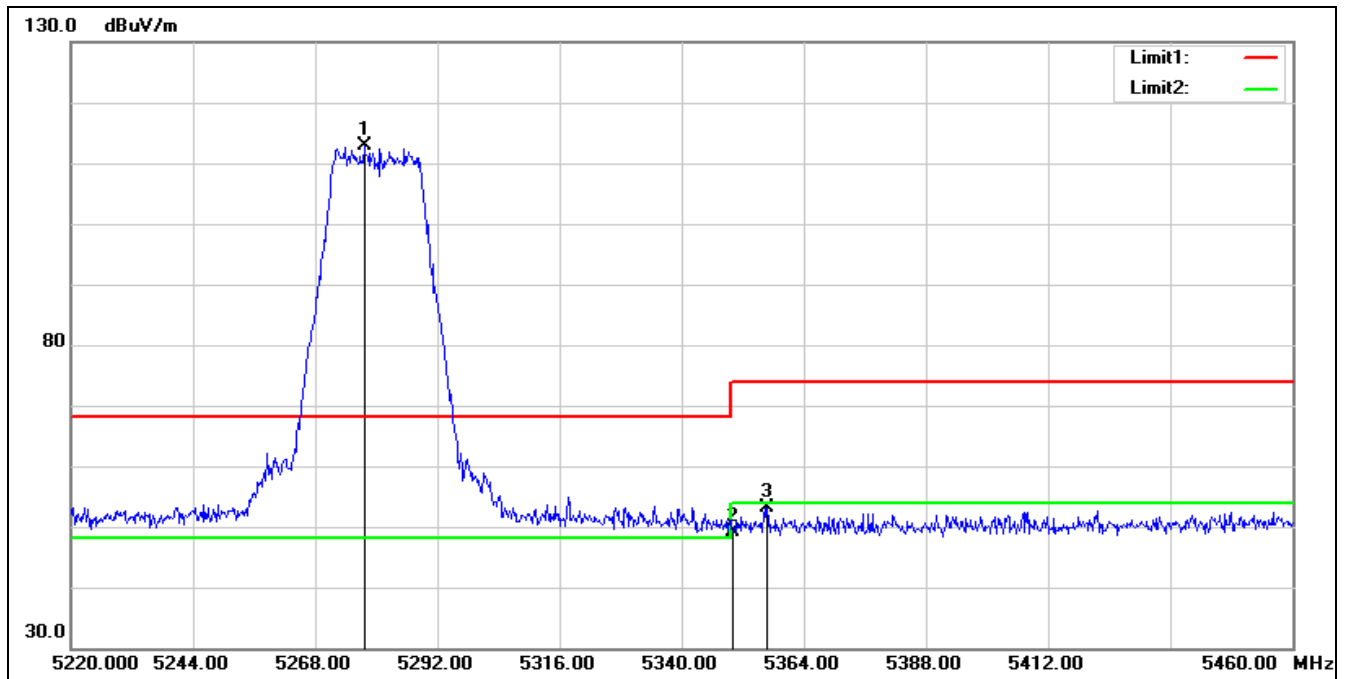


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5277.600	112.25	0.72	112.97	68.20	44.77	peak
2	5350.000	48.17	1.02	49.19	74.00	-24.81	peak
3	5356.800	52.00	1.07	53.07	74.00	-20.93	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5280 MHz
Remark:

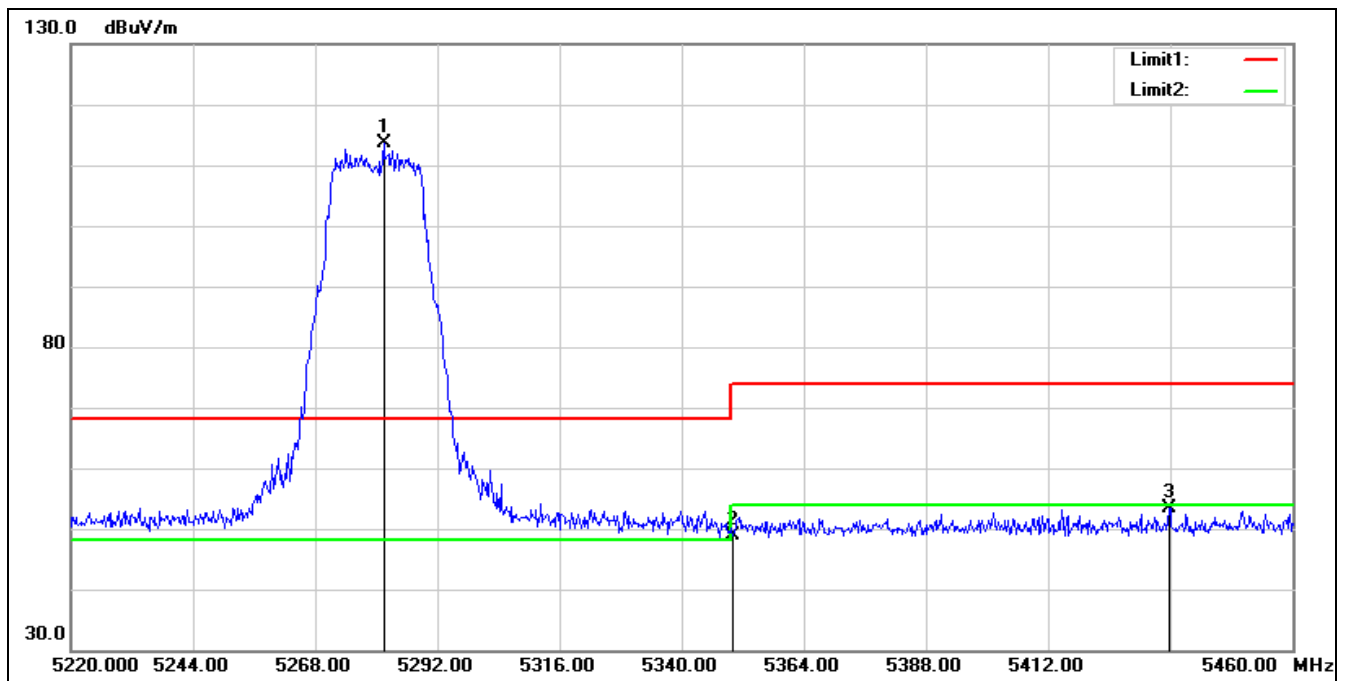


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5281.440	112.85	0.71	113.56	68.20	45.36	peak
2	5350.000	47.86	1.02	48.88	74.00	-25.12	peak
3	5435.760	51.78	1.63	53.41	74.00	-20.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

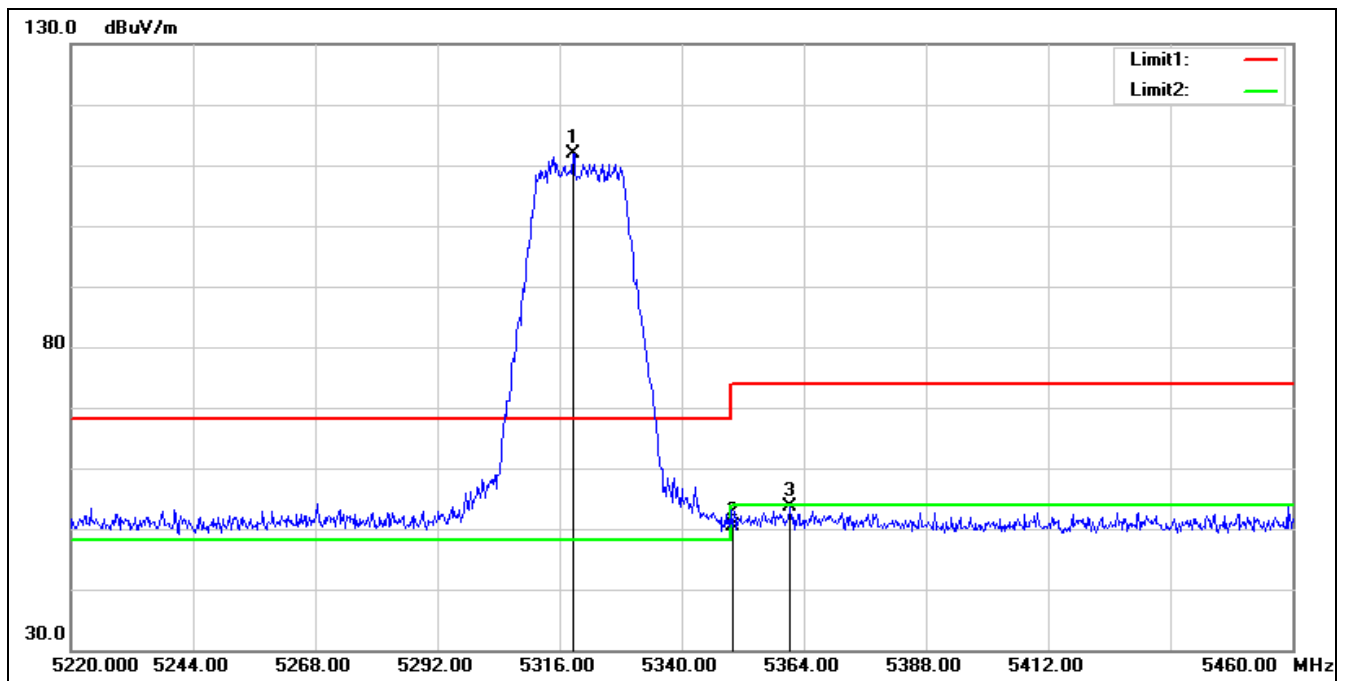

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5318.640	111.13	0.79	111.92	68.20	43.72	peak
2	5350.000	49.43	1.02	50.45	74.00	-23.55	peak
3	5361.360	52.54	1.10	53.64	74.00	-20.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5320 MHz		
Remark:			

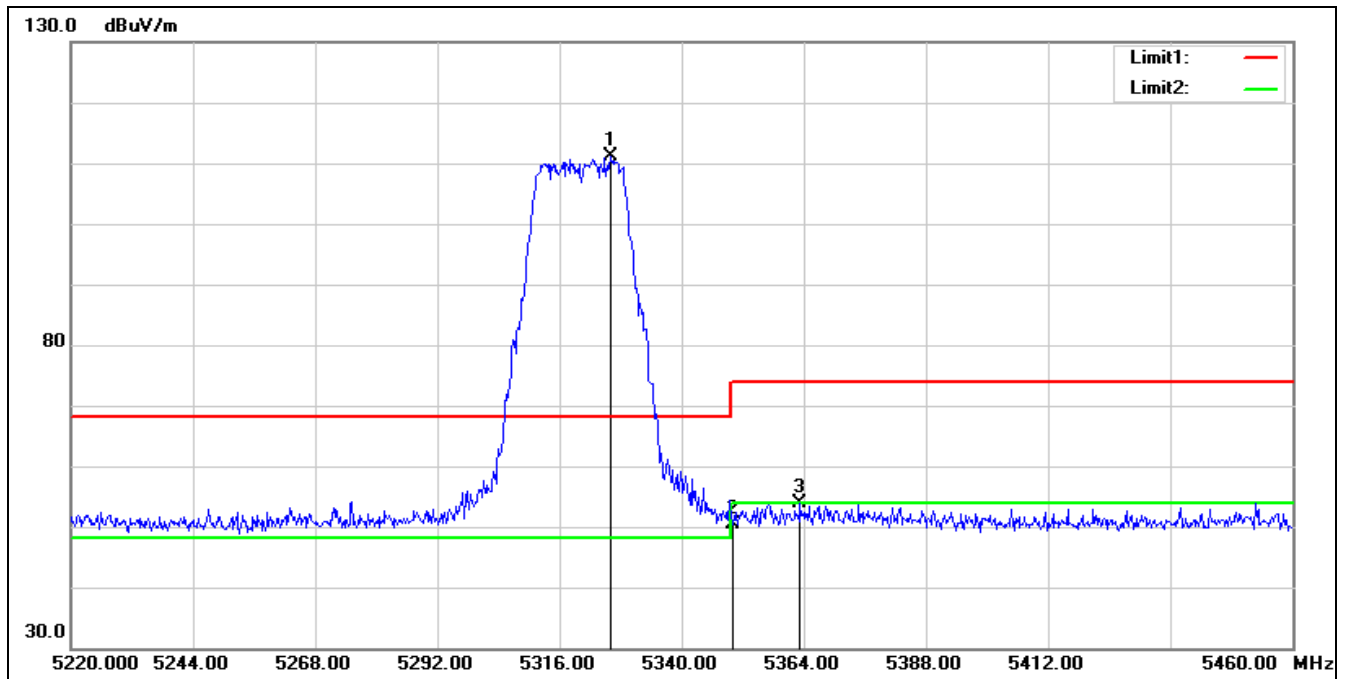


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5326.080	110.36	0.85	111.21	68.20	43.01	peak
2	5350.000	49.45	1.02	50.47	74.00	-23.53	peak
3	5363.280	52.77	1.11	53.88	74.00	-20.12	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5500 MHz

Remark:

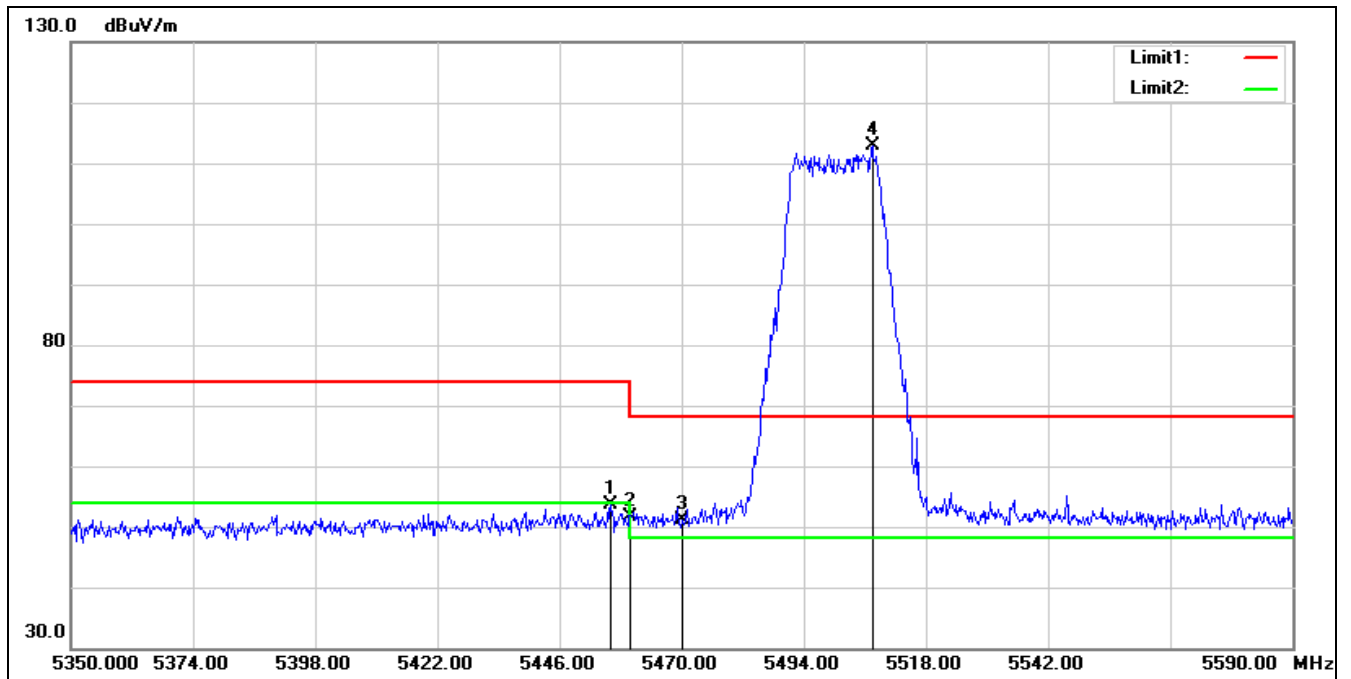

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.080	51.96	1.75	53.71	74.00	-20.29	peak
2	5460.000	49.98	1.75	51.73	74.00	-22.27	peak
3	5470.000	49.41	1.77	51.18	68.20	-17.02	peak
4*	5507.440	111.11	1.80	112.91	68.20	44.71	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT20 5500 MHz
Remark:

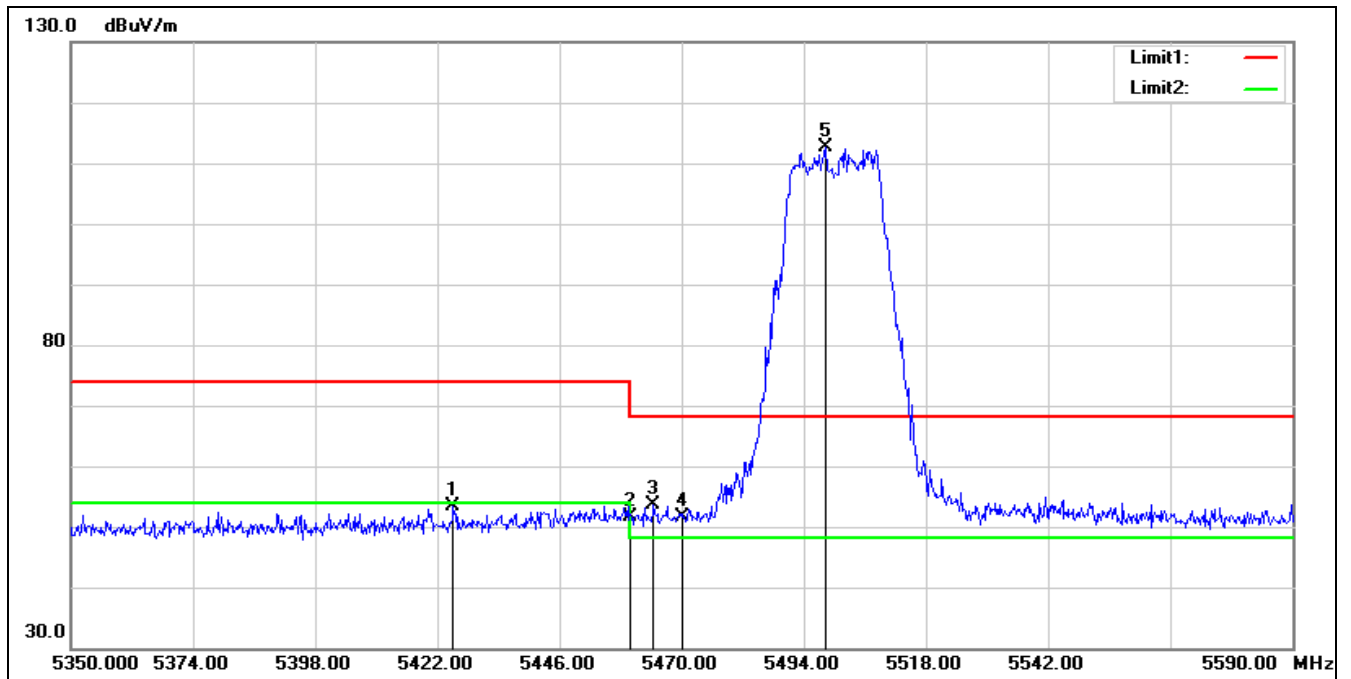


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5425.120	51.94	1.56	53.50	74.00	-20.50	peak
2	5460.000	49.88	1.75	51.63	74.00	-22.37	peak
3	5464.480	51.94	1.75	53.69	68.20	-14.51	peak
4	5470.000	49.91	1.77	51.68	68.20	-16.52	peak
5*	5498.320	110.82	1.80	112.62	68.20	44.42	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5560 MHz

Remark:

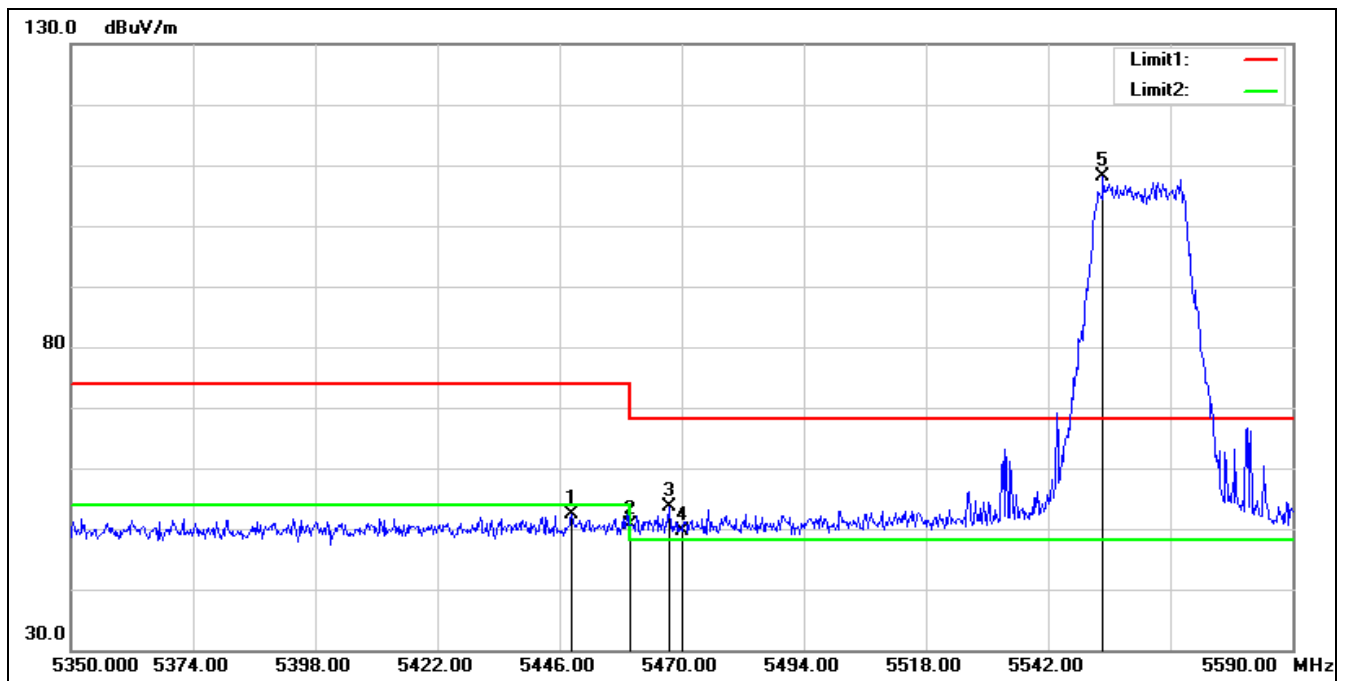


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.400	50.53	1.73	52.26	74.00	-21.74	peak
2	5460.000	48.80	1.75	50.55	74.00	-23.45	peak
3	5467.600	51.88	1.76	53.64	68.20	-14.56	peak
4	5470.000	47.92	1.77	49.69	68.20	-18.51	peak
5*	5552.800	106.44	1.78	108.22	68.20	40.02	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5560 MHz

Remark:

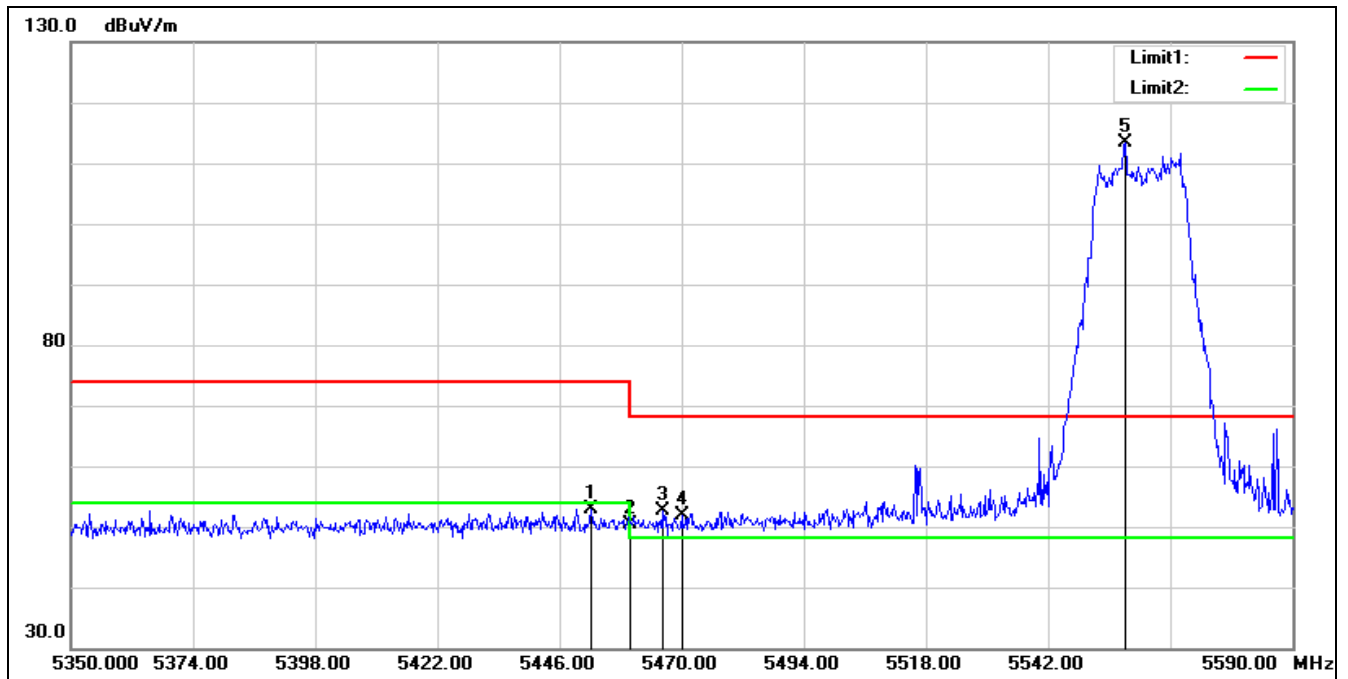

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.240	51.25	1.75	53.00	74.00	-21.00	peak
2	5460.000	48.68	1.75	50.43	74.00	-23.57	peak
3	5466.160	50.80	1.76	52.56	68.20	-15.64	peak
4	5470.000	50.20	1.77	51.97	68.20	-16.23	peak
5*	5557.120	111.51	1.77	113.28	68.20	45.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5700 MHz		
Remark:			

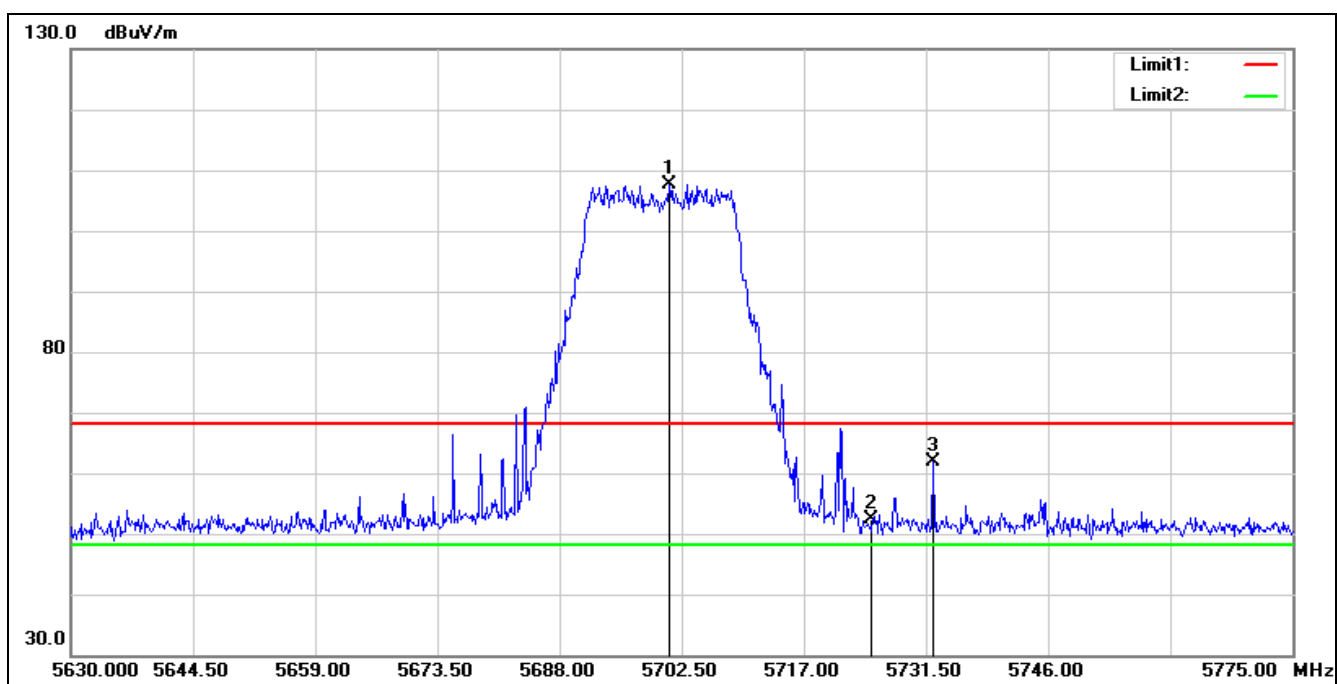


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5701.050	106.18	1.54	107.72	68.20	39.52	peak
2	5725.000	50.61	1.78	52.39	68.20	-15.81	peak
3	5732.370	60.06	1.85	61.91	68.20	-6.29	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5700 MHz

Remark:

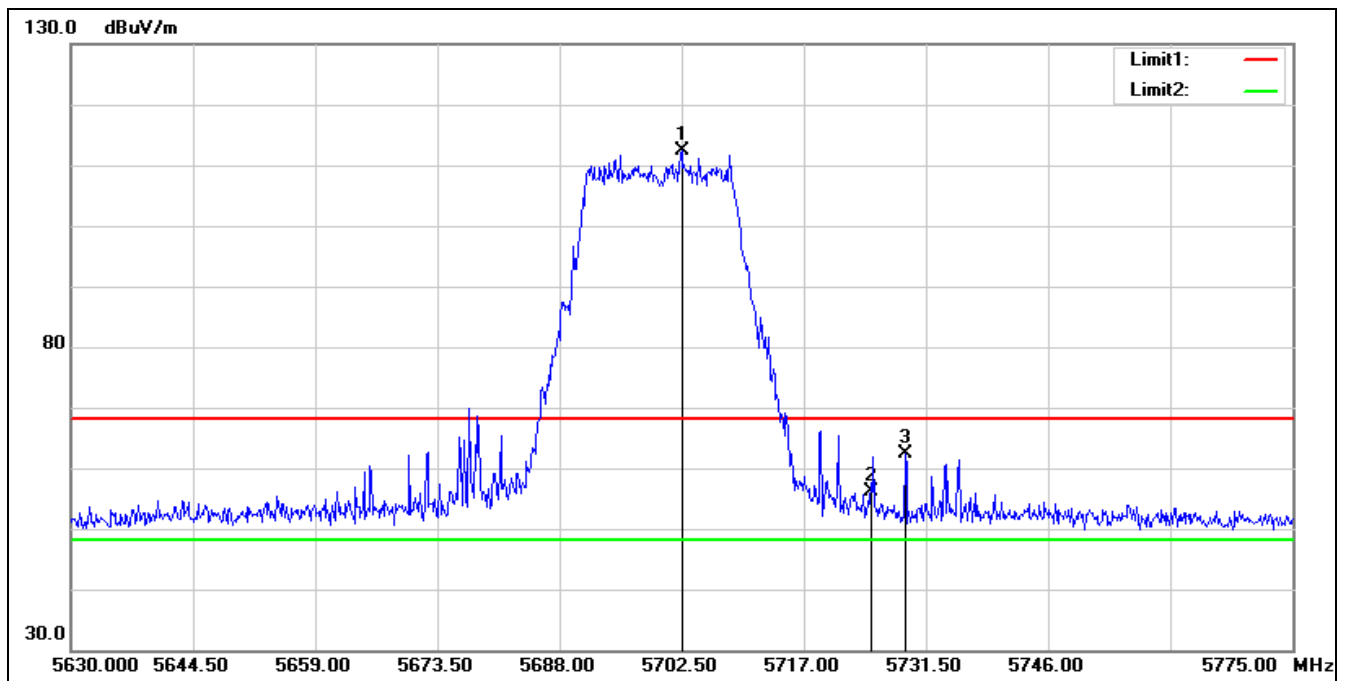


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5702.500	110.73	1.56	112.29	68.20	44.09	peak
2	5725.000	54.44	1.78	56.22	68.20	-11.98	peak
3	5729.035	60.61	1.82	62.43	68.20	-5.77	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

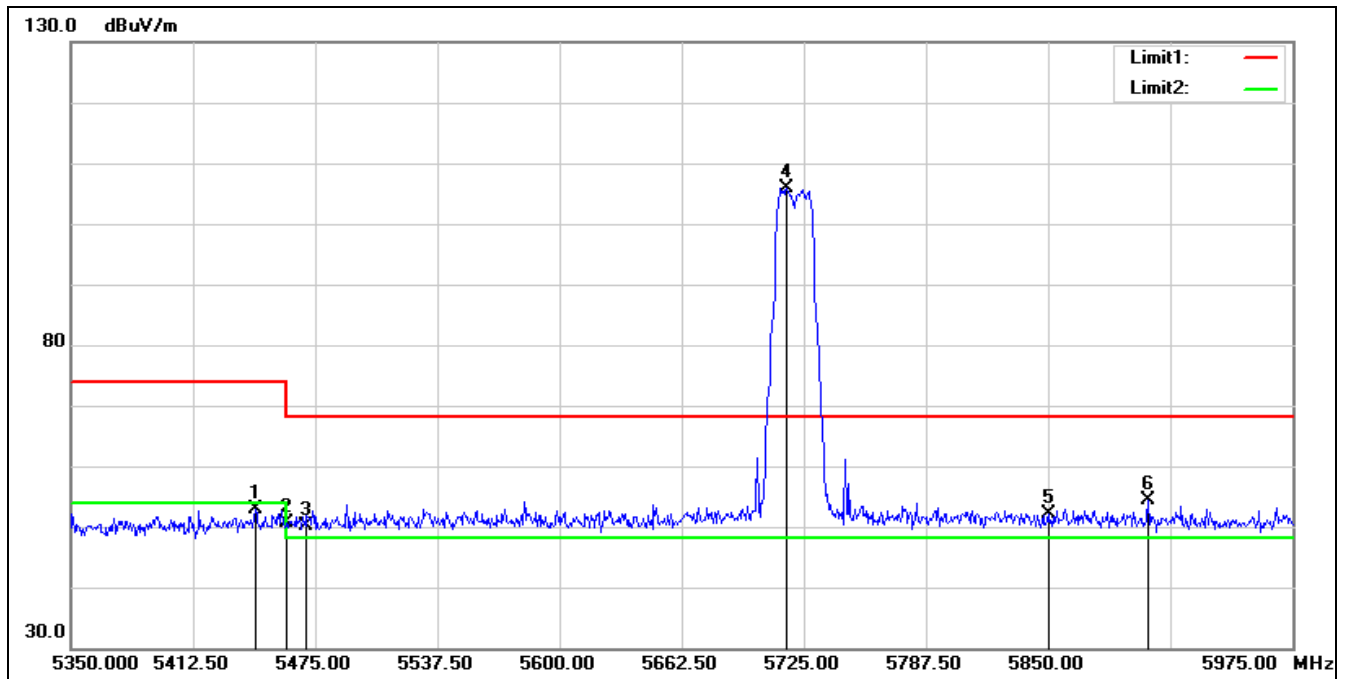


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.375	51.22	1.70	52.92	74.00	-21.08	peak
2	5460.000	48.79	1.75	50.54	74.00	-23.46	peak
3	5470.000	48.28	1.77	50.05	68.20	-18.15	peak
4*	5716.250	104.16	1.70	105.86	68.20	37.66	peak
5	5850.000	49.89	2.29	52.18	68.20	-16.02	peak
6	5901.250	51.94	2.37	54.31	68.20	-13.89	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT20 5720 MHz

Remark:

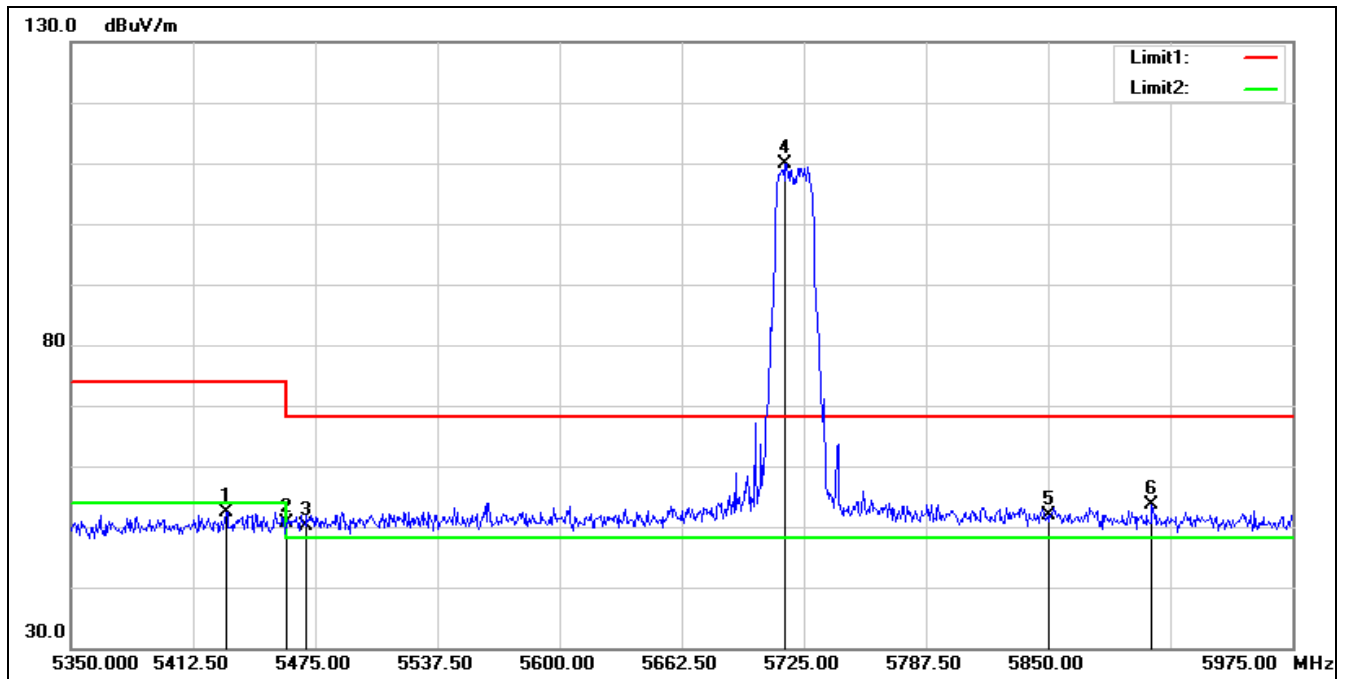


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5429.375	50.79	1.60	52.39	74.00	-21.61	peak
2	5460.000	48.96	1.75	50.71	74.00	-23.29	peak
3	5470.000	48.43	1.77	50.20	68.20	-18.00	peak
4*	5715.625	108.25	1.70	109.95	68.20	41.75	peak
5	5850.000	49.58	2.29	51.87	68.20	-16.33	peak
6	5903.125	51.27	2.36	53.63	68.20	-14.57	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT20 5745 MHz

Remark:

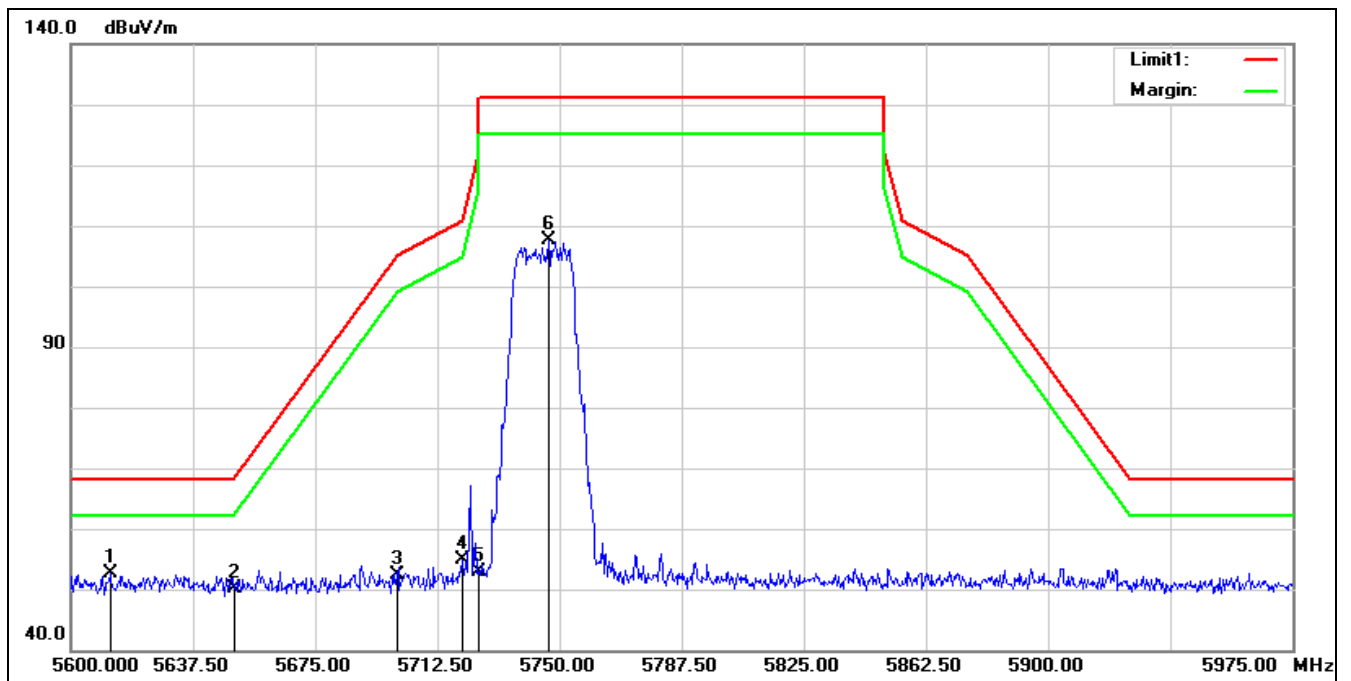


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5612.000	50.95	1.65	52.60	68.20	-15.60	peak
2	5650.000	48.47	1.56	50.03	68.20	-18.17	peak
3	5700.000	50.89	1.54	52.43	105.20	-52.77	peak
4	5720.000	53.08	1.74	54.82	110.80	-55.98	peak
5	5725.000	51.02	1.78	52.80	122.20	-69.40	peak
6	5746.625	105.56	2.00	107.56	131.20	-23.64	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT20 5745 MHz

Remark:

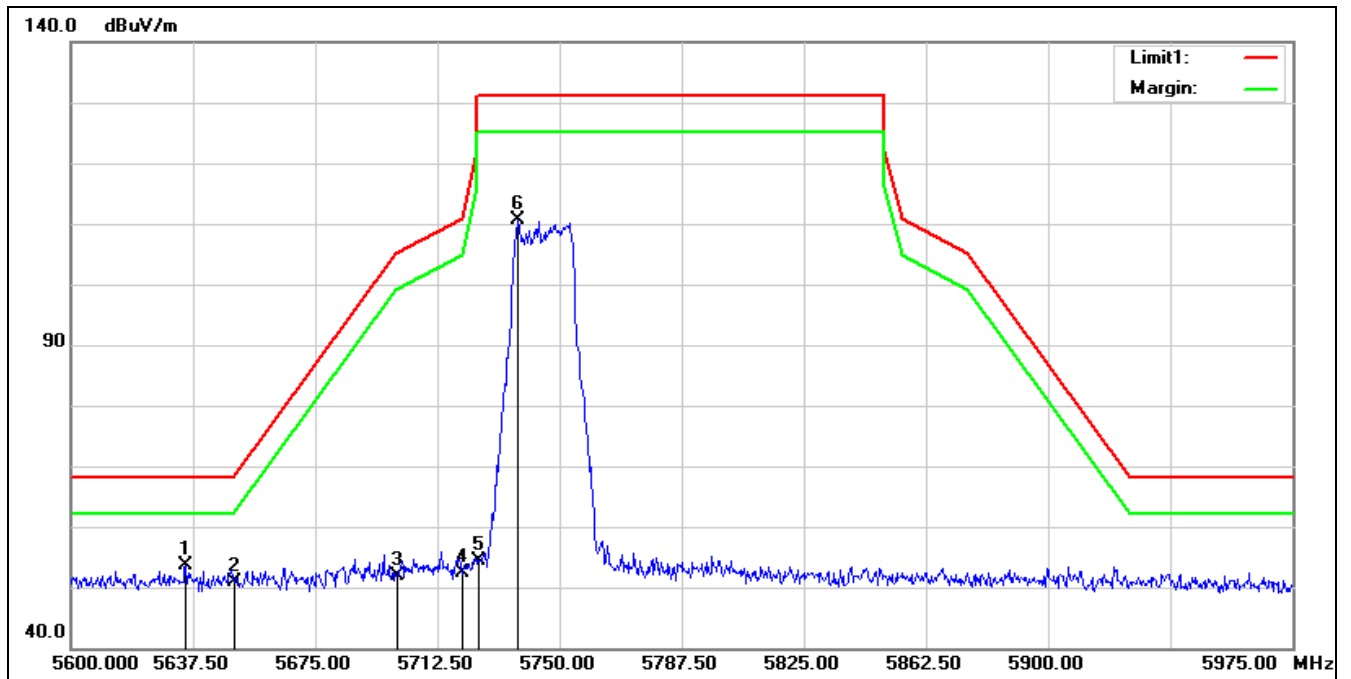

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5635.250	52.14	1.59	53.73	68.20	-14.47	peak
2	5650.000	49.34	1.56	50.90	68.20	-17.30	peak
3	5700.000	50.33	1.54	51.87	105.20	-53.33	peak
4	5720.000	50.73	1.74	52.47	110.80	-58.33	peak
5	5725.000	52.49	1.78	54.27	122.20	-67.93	peak
6	5737.250	108.70	1.90	110.60	131.20	-20.60	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

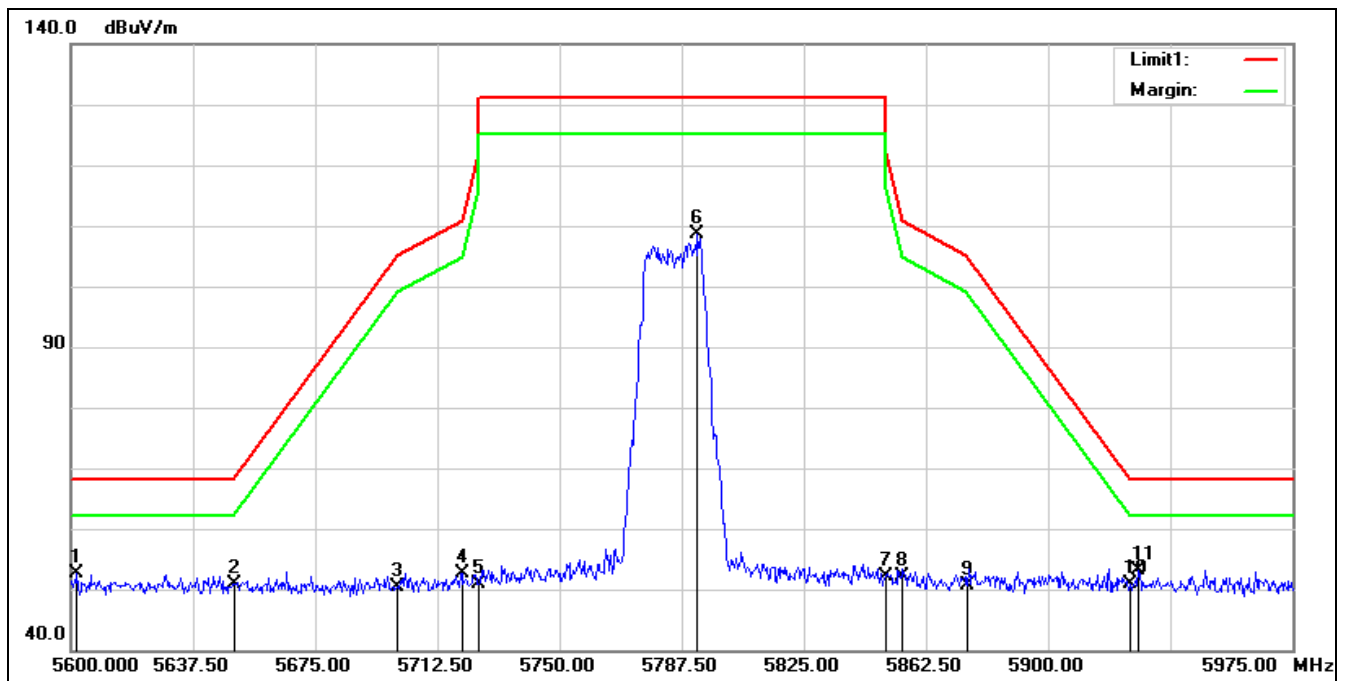

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5601.875	50.96	1.67	52.63	68.20	-15.57	peak
2	5650.000	49.42	1.56	50.98	68.20	-17.22	peak
3	5700.000	48.89	1.54	50.43	105.20	-54.77	peak
4	5720.000	50.99	1.74	52.73	110.80	-58.07	peak
5	5725.000	49.22	1.78	51.00	122.20	-71.20	peak
6	5792.375	106.37	2.18	108.55	131.20	-22.65	peak
7	5850.000	49.80	2.29	52.09	122.20	-70.11	peak
8	5855.000	49.79	2.31	52.10	110.80	-58.70	peak
9	5875.000	48.25	2.34	50.59	105.20	-54.61	peak
10	5925.000	48.71	2.23	50.94	68.20	-17.26	peak
11*	5927.750	51.03	2.20	53.23	68.20	-14.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			

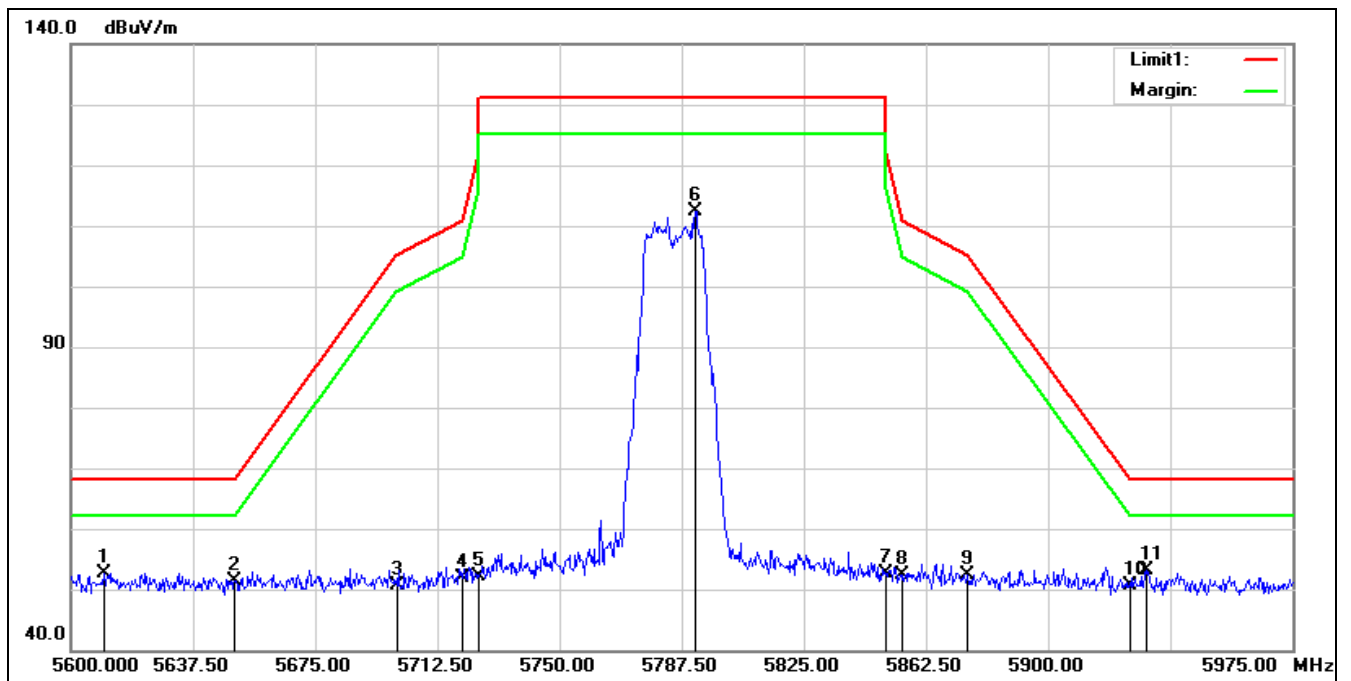

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5785 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5610.125	51.09	1.65	52.74	68.20	-15.46	peak
2	5650.000	49.84	1.56	51.40	68.20	-16.80	peak
3	5700.000	49.12	1.54	50.66	105.20	-54.54	peak
4	5720.000	50.10	1.74	51.84	110.80	-58.96	peak
5	5725.000	50.34	1.78	52.12	122.20	-70.08	peak
6	5791.625	110.22	2.18	112.40	131.20	-18.80	peak
7	5850.000	50.40	2.29	52.69	122.20	-69.51	peak
8	5855.000	50.09	2.31	52.40	110.80	-58.40	peak
9	5875.000	49.92	2.34	52.26	105.20	-52.94	peak
10	5925.000	48.30	2.23	50.53	68.20	-17.67	peak
11*	5930.000	50.94	2.19	53.13	68.20	-15.07	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT20 5825 MHz

Remark:

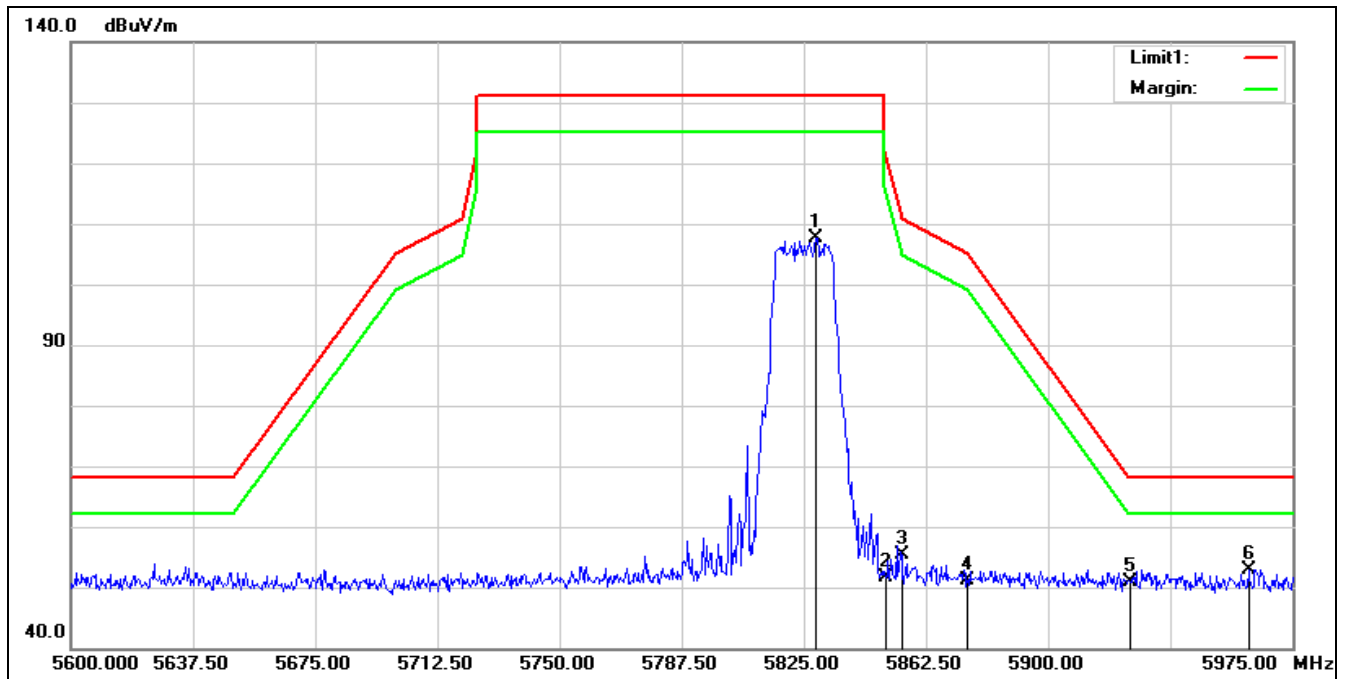

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5828.750	105.41	2.26	107.67	131.20	-23.53	peak
2	5850.000	49.41	2.29	51.70	122.20	-70.50	peak
3	5855.000	53.09	2.31	55.40	110.80	-55.40	peak
4	5875.000	48.80	2.34	51.14	105.20	-54.06	peak
5	5925.000	48.73	2.23	50.96	68.20	-17.24	peak
6*	5961.500	50.90	2.08	52.98	68.20	-15.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT20 5825 MHz		
Remark:			

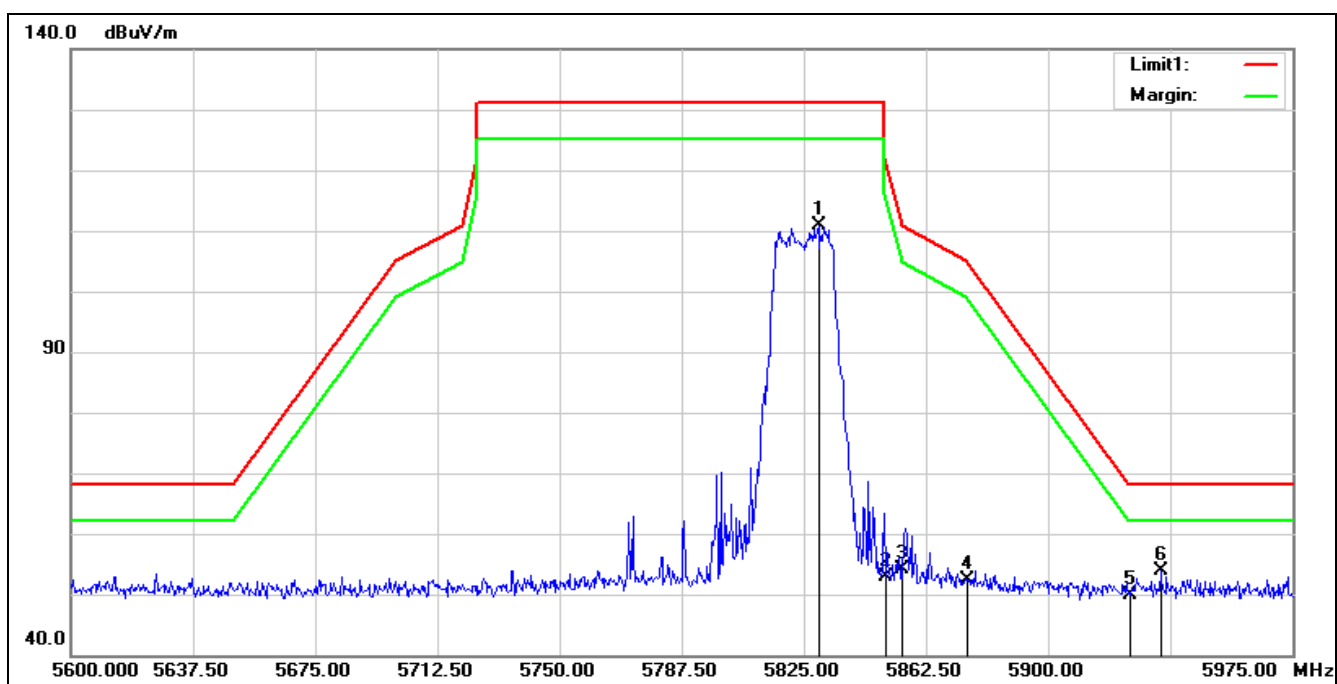


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5829.500	108.71	2.26	110.97	131.20	-20.23	peak
2	5850.000	50.69	2.29	52.98	122.20	-69.22	peak
3	5855.000	51.82	2.31	54.13	110.80	-56.67	peak
4	5875.000	50.03	2.34	52.37	105.20	-52.83	peak
5	5925.000	47.54	2.23	49.77	68.20	-18.43	peak
6*	5934.500	51.73	2.16	53.89	68.20	-14.31	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT40 5190 MHz

Remark:

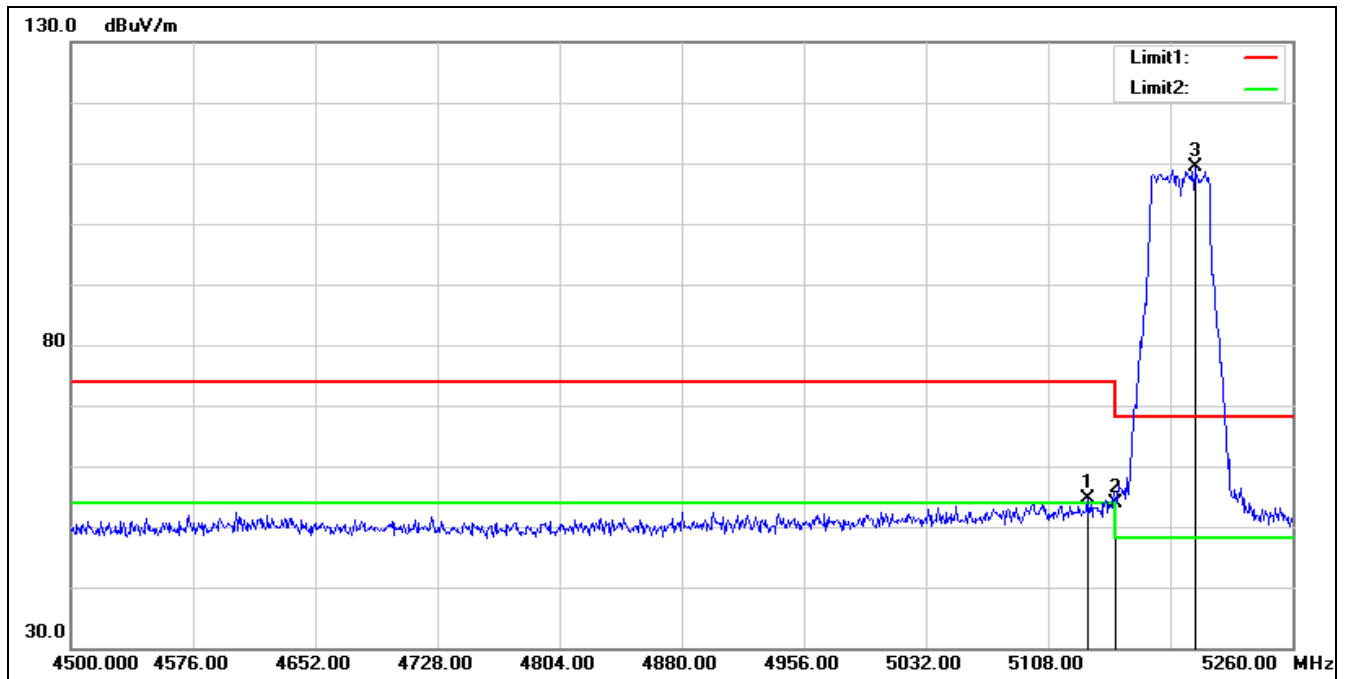


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5132.320	53.27	1.40	54.67	74.00	-19.33	peak
2	5150.000	52.52	1.38	53.90	74.00	-20.10	peak
3*	5199.200	108.29	1.14	109.43	68.20	41.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5190 MHz		
Remark:			

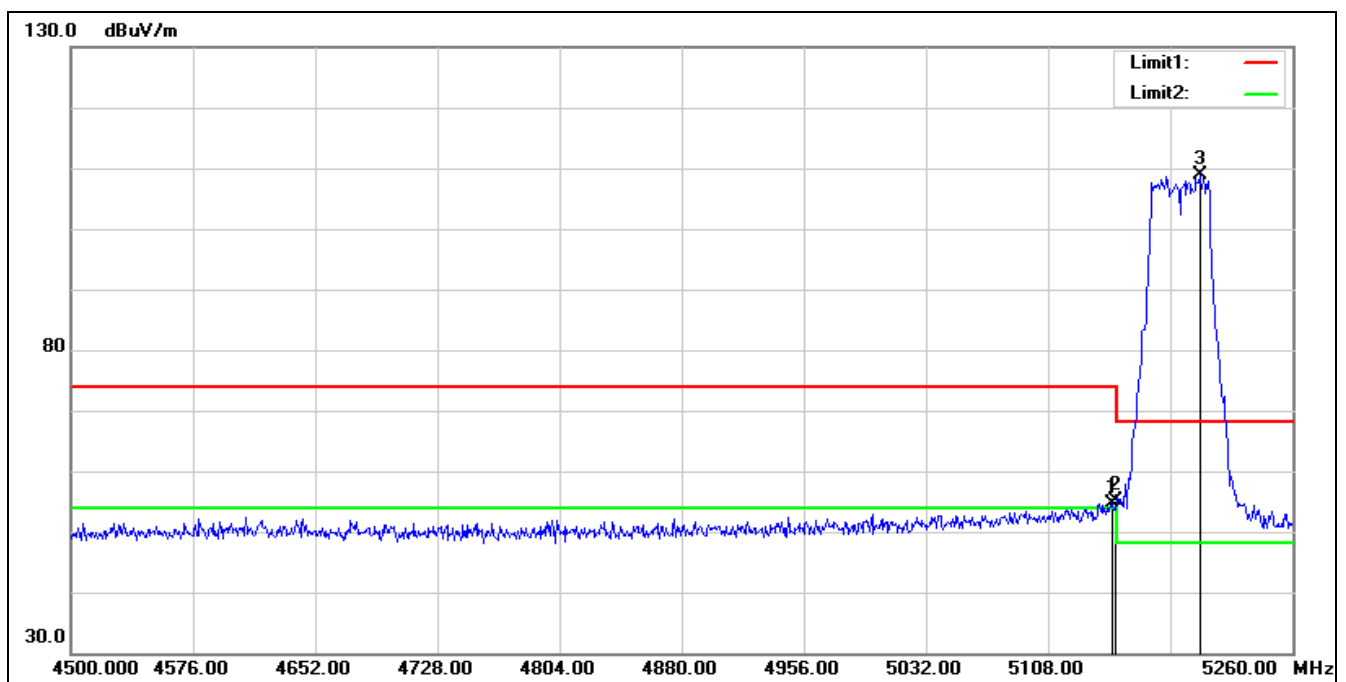

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.280	53.29	1.38	54.67	74.00	-19.33	peak
2	5150.000	53.65	1.38	55.03	74.00	-18.97	peak
3*	5202.240	107.65	1.13	108.78	68.20	40.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5230 MHz		
Remark:			

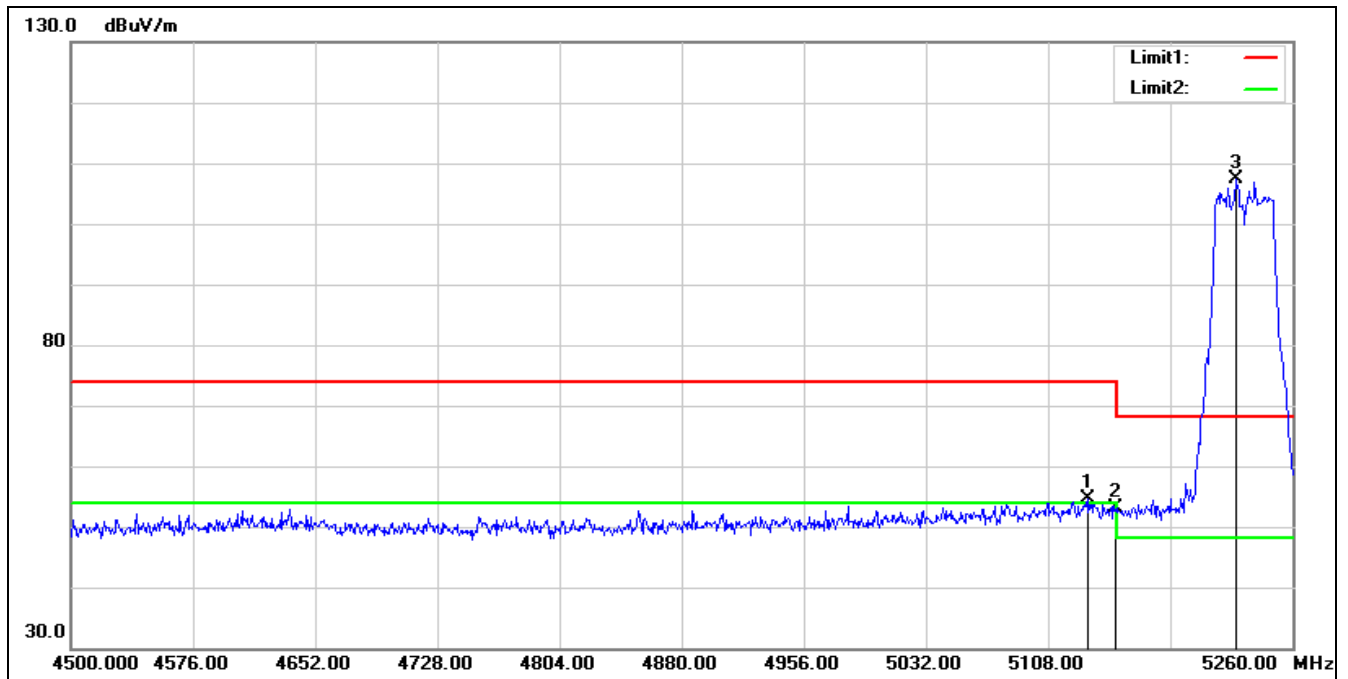


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.080	53.35	1.39	54.74	74.00	-19.26	peak
2	5150.000	51.64	1.38	53.02	74.00	-20.98	peak
3*	5225.040	106.48	0.97	107.45	68.20	39.25	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5230 MHz

Remark:

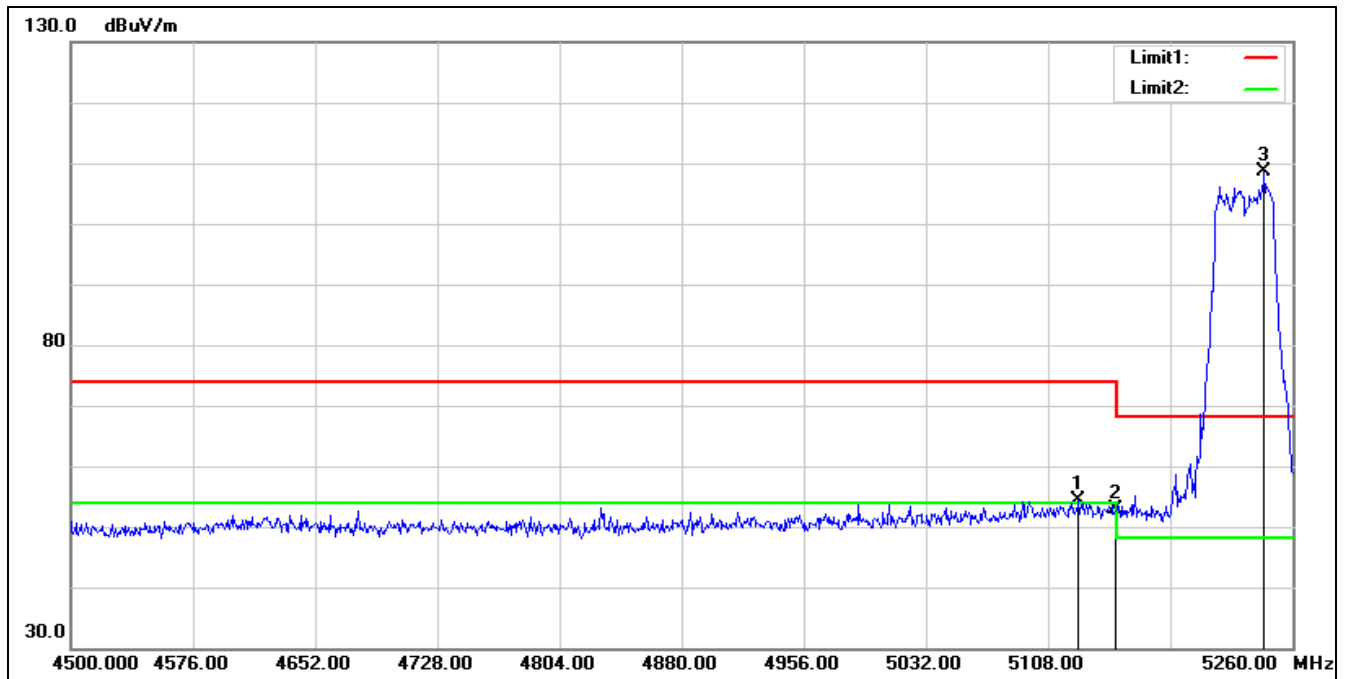


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.000	53.07	1.40	54.47	74.00	-19.53	peak
2	5150.000	51.41	1.38	52.79	74.00	-21.21	peak
3*	5242.520	107.88	0.85	108.73	68.20	40.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5270 MHz		
Remark:			

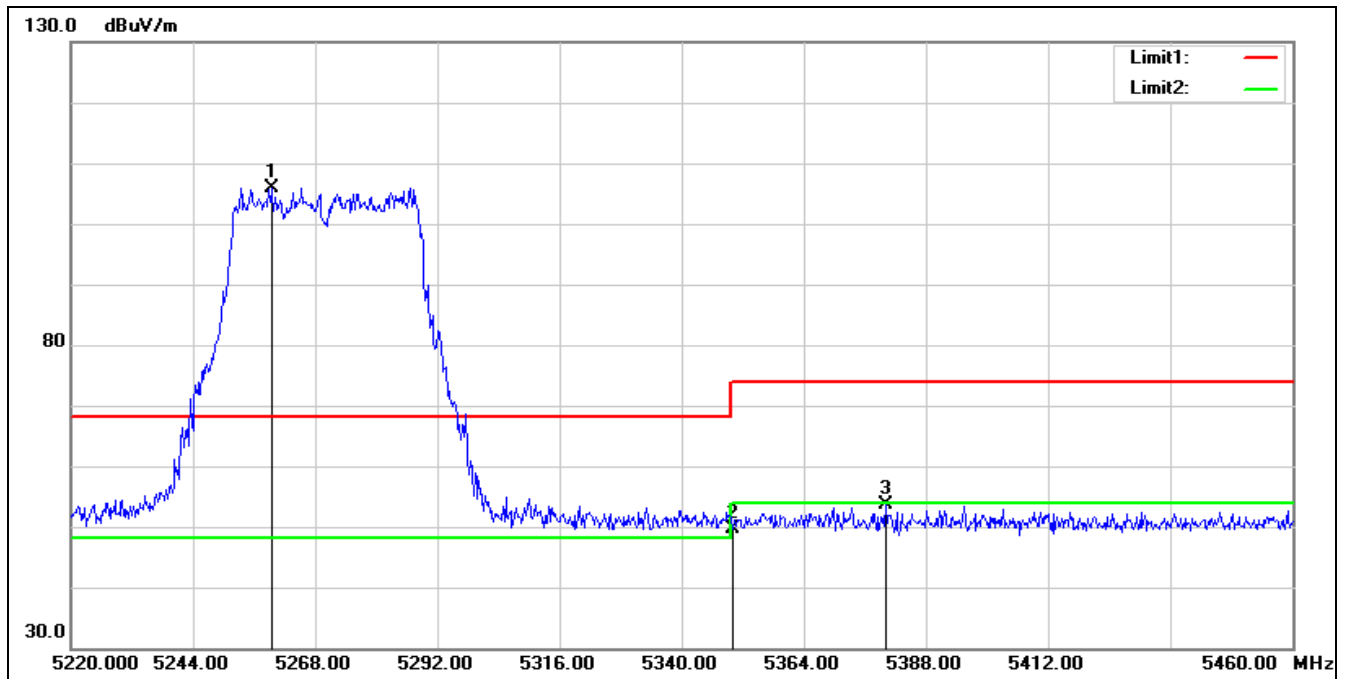


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5259.360	105.22	0.77	105.99	68.20	37.79	peak
2	5350.000	48.51	1.02	49.53	74.00	-24.47	peak
3	5380.080	52.34	1.23	53.57	74.00	-20.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5270 MHz		
Remark:			

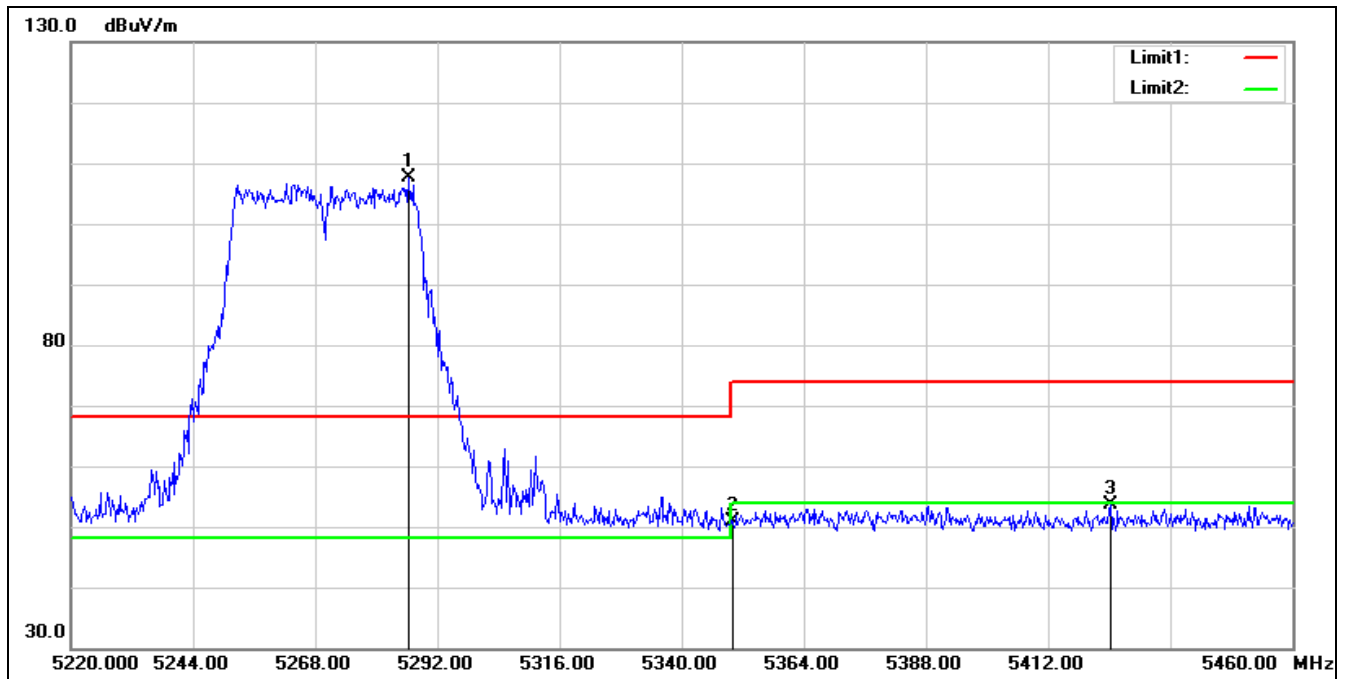

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5286.240	107.02	0.71	107.73	68.20	39.53	peak
2	5350.000	49.96	1.02	50.98	74.00	-23.02	peak
3	5424.240	52.03	1.56	53.59	74.00	-20.41	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5310 MHz		
Remark:			

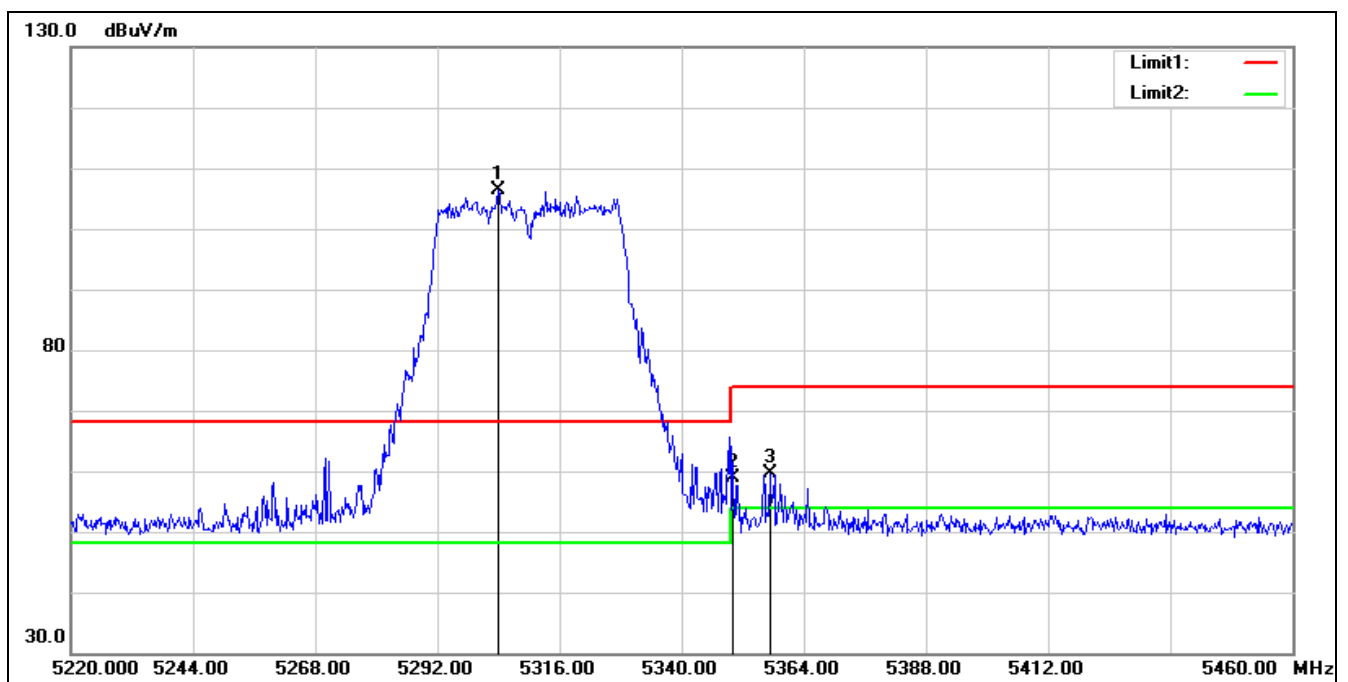


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5304.000	105.62	0.69	106.31	68.20	38.11	peak
2	5350.000	57.76	1.02	58.78	74.00	-15.22	peak
3	5357.280	58.46	1.07	59.53	74.00	-14.47	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5310 MHz

Remark:

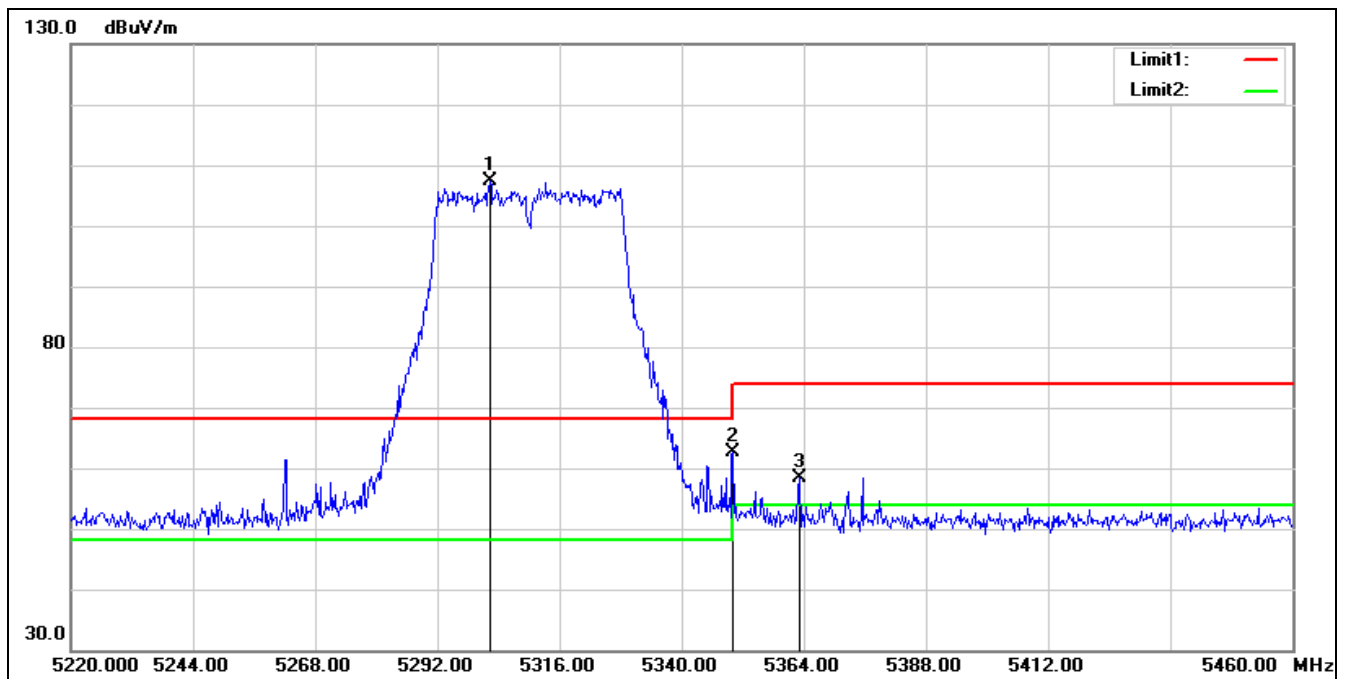


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5302.320	106.79	0.68	107.47	68.20	39.27	peak
2	5350.000	61.49	1.02	62.51	74.00	-11.49	peak
3	5363.040	57.36	1.11	58.47	74.00	-15.53	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11ac VHT40 5510 MHz
Remark:

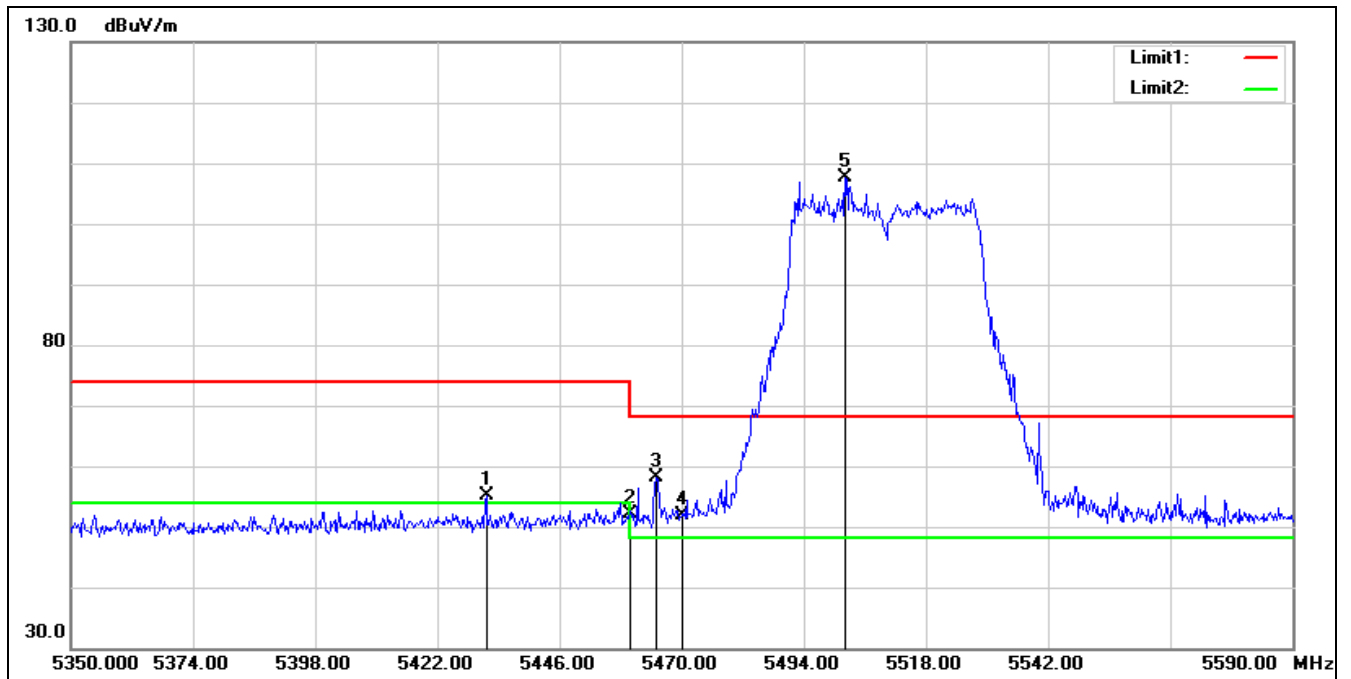


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5431.600	53.46	1.61	55.07	74.00	-18.93	peak
2	5460.000	50.50	1.75	52.25	74.00	-21.75	peak
3	5464.960	56.47	1.75	58.22	68.20	-9.98	peak
4	5470.000	50.22	1.77	51.99	68.20	-16.21	peak
5*	5502.160	105.95	1.80	107.75	68.20	39.55	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11ac VHT40 5510 MHz
Remark:

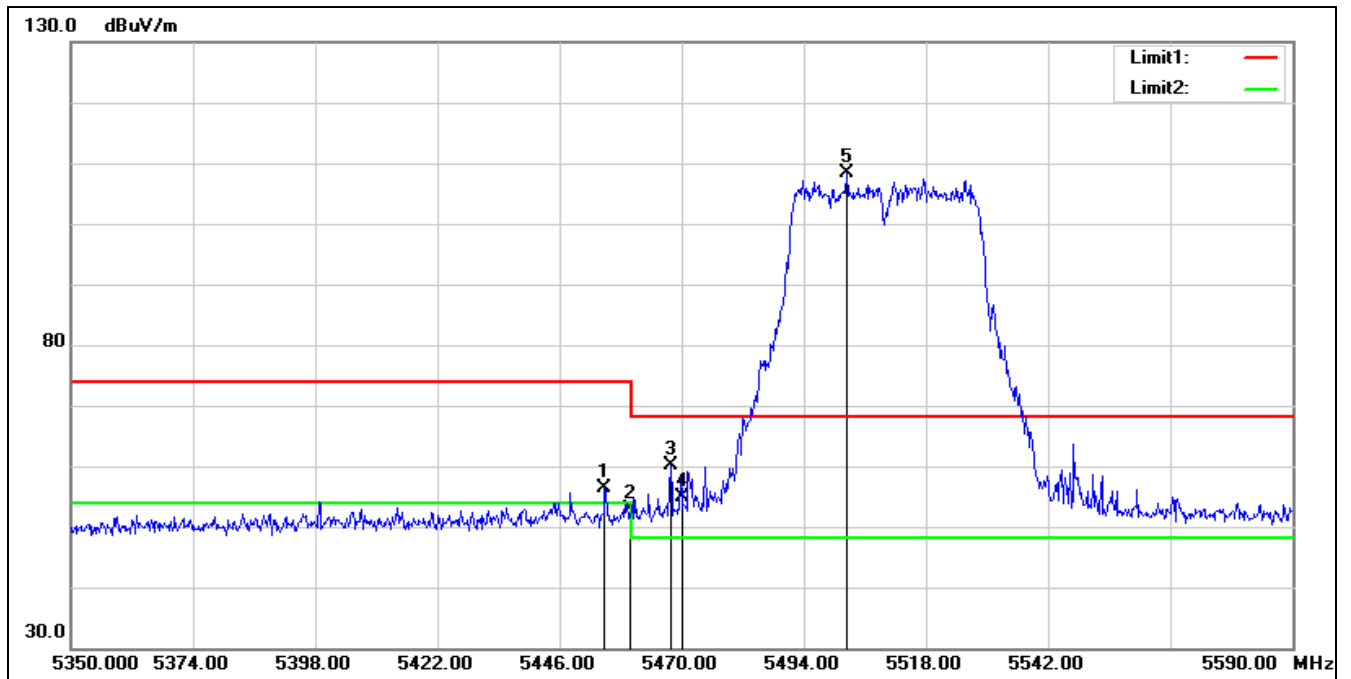

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.880	54.54	1.75	56.29	74.00	-17.71	peak
2	5460.000	51.13	1.75	52.88	74.00	-21.12	peak
3	5467.840	58.31	1.76	60.07	68.20	-8.13	peak
4	5470.000	53.15	1.77	54.92	68.20	-13.28	peak
5*	5502.400	106.58	1.80	108.38	68.20	40.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5550 MHz		
Remark:			

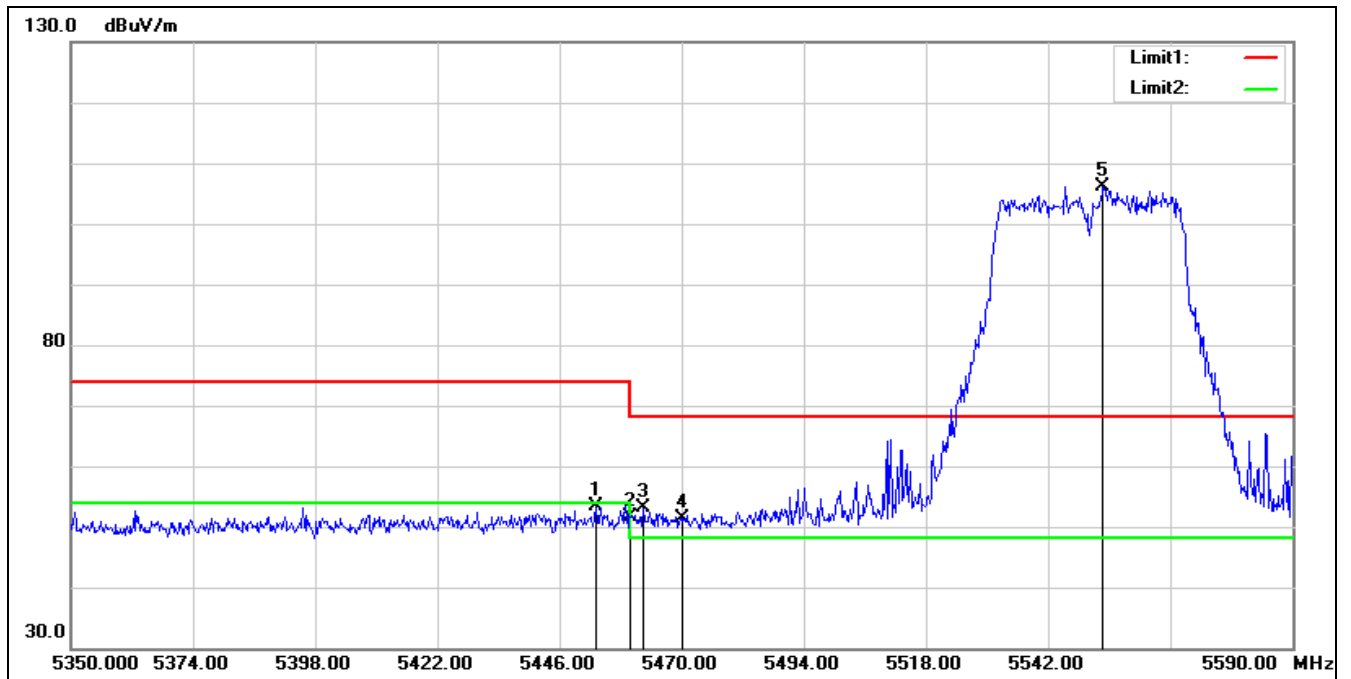


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5453.200	51.55	1.75	53.30	74.00	-20.70	peak
2	5460.000	49.80	1.75	51.55	74.00	-22.45	peak
3	5462.320	51.50	1.75	53.25	68.20	-14.95	peak
4	5470.000	49.61	1.77	51.38	68.20	-16.82	peak
5*	5552.800	104.36	1.78	106.14	68.20	37.94	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5550 MHz

Remark:

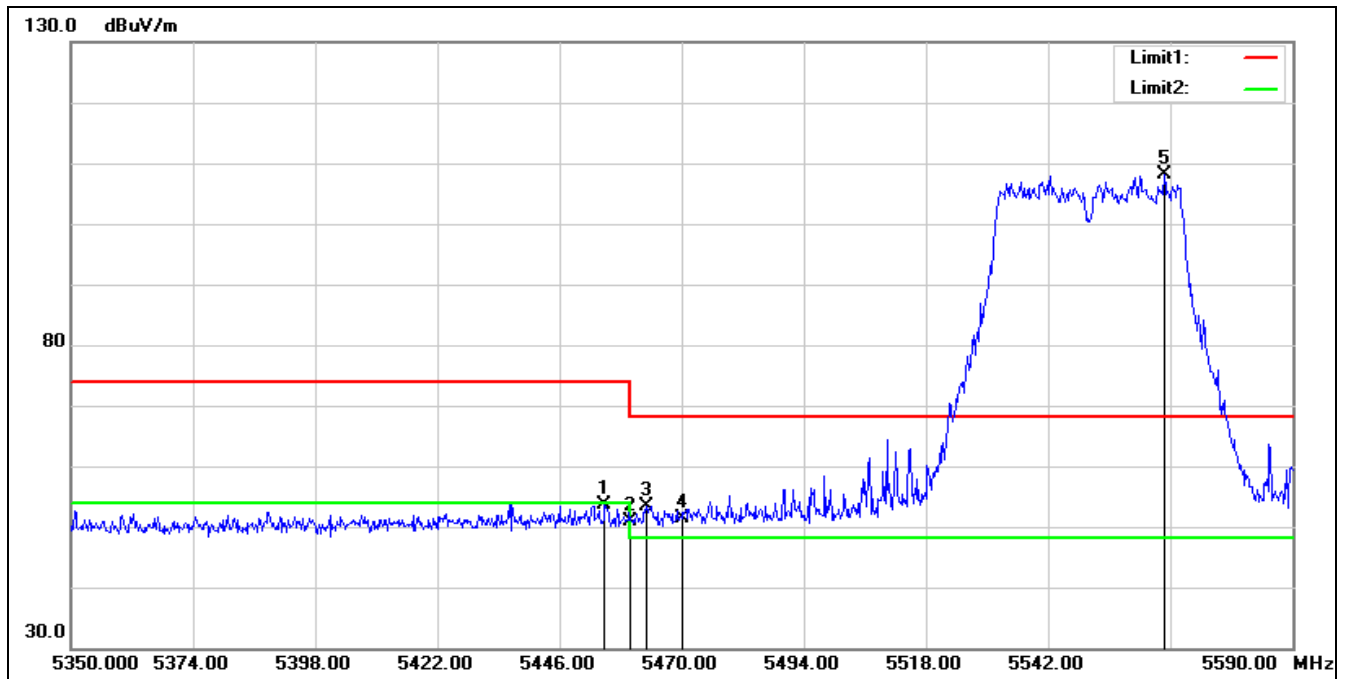


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.880	51.85	1.75	53.60	74.00	-20.40	peak
2	5460.000	49.05	1.75	50.80	74.00	-23.20	peak
3	5463.040	51.70	1.75	53.45	68.20	-14.75	peak
4	5470.000	49.55	1.77	51.32	68.20	-16.88	peak
5*	5564.800	106.38	1.75	108.13	68.20	39.93	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5670 MHz

Remark:

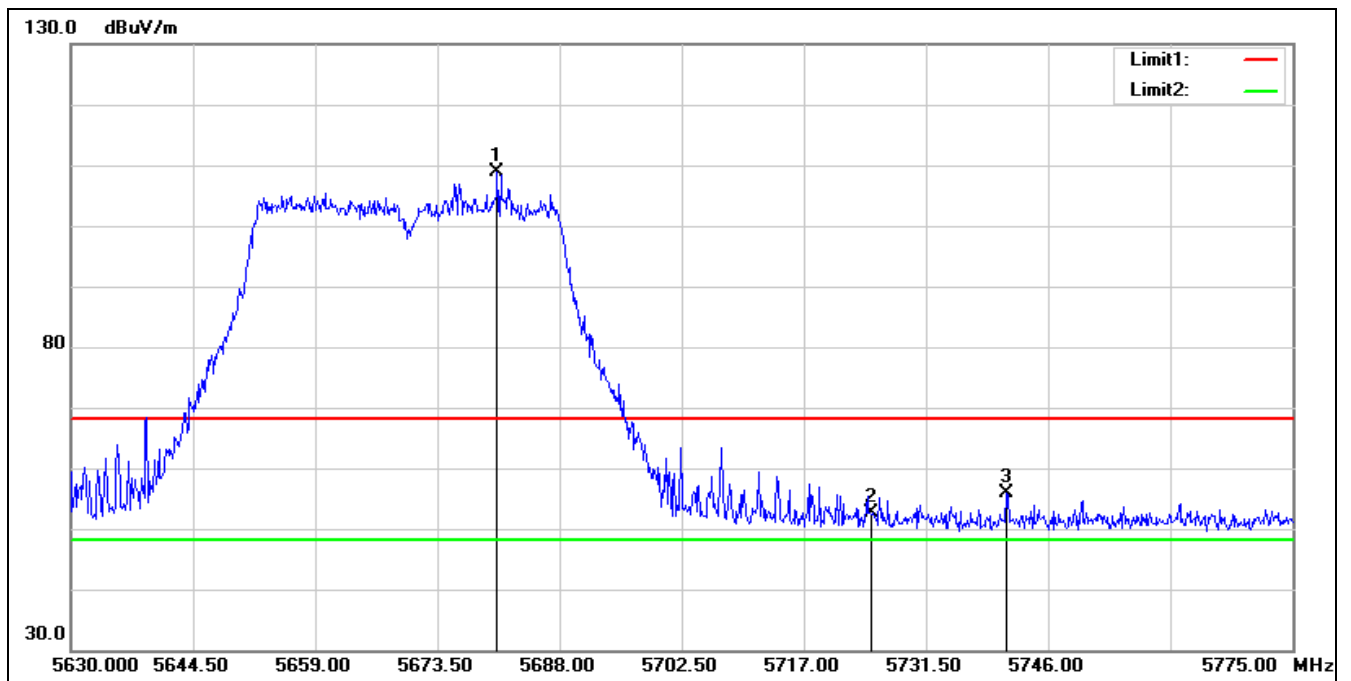


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5680.605	107.21	1.55	108.76	68.20	40.56	peak
2	5725.000	50.86	1.78	52.64	68.20	-15.56	peak
3	5741.070	53.93	1.93	55.86	68.20	-12.34	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5670 MHz

Remark:

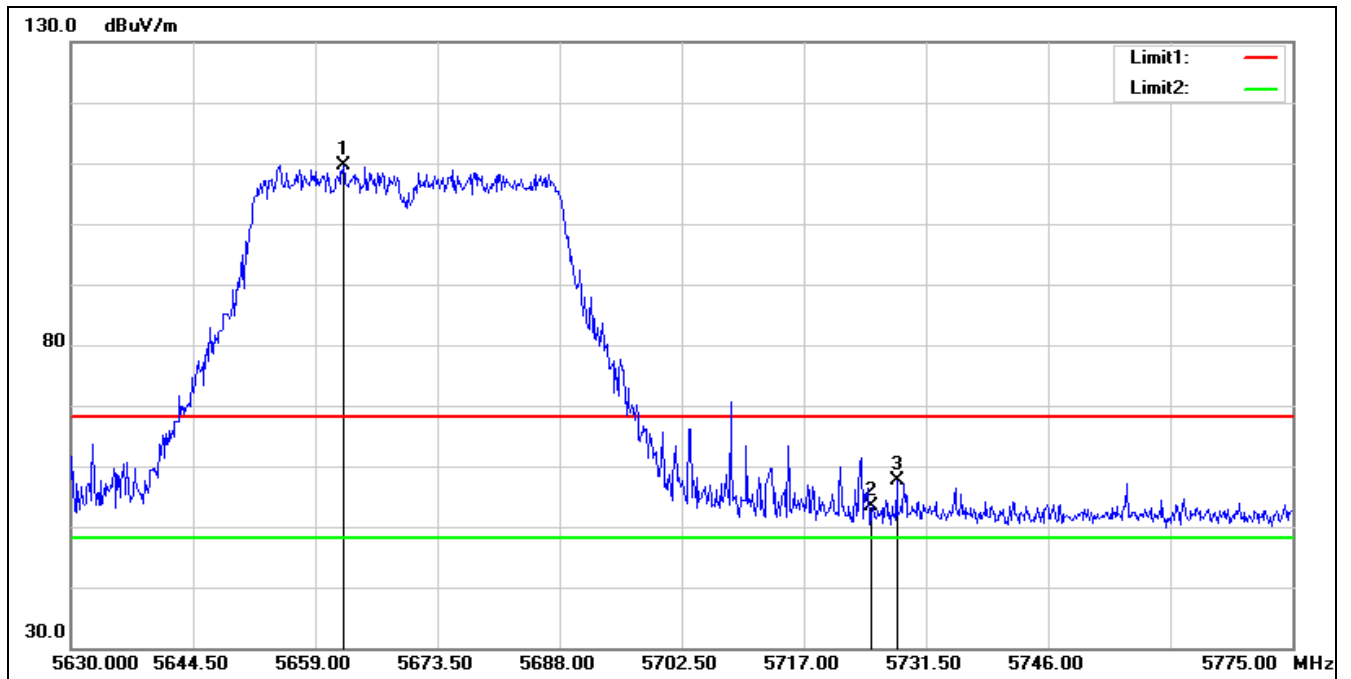


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5662.335	108.04	1.55	109.59	68.20	41.39	peak
2	5725.000	51.62	1.78	53.40	68.20	-14.80	peak
3	5728.020	55.82	1.81	57.63	68.20	-10.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT40 5710 MHz		
Remark:			

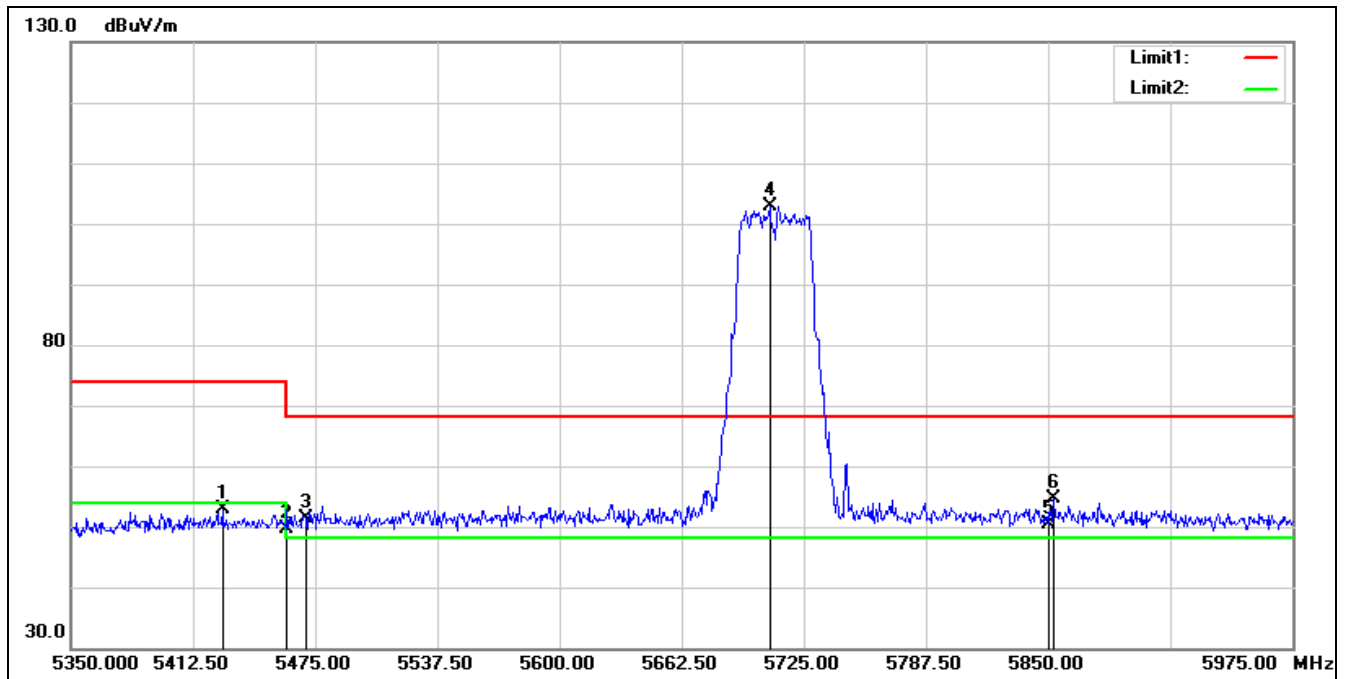

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5427.500	51.22	1.58	52.80	74.00	-21.20	peak
2	5460.000	47.81	1.75	49.56	74.00	-24.44	peak
3	5470.000	49.58	1.77	51.35	68.20	-16.85	peak
4*	5707.500	101.31	1.61	102.92	68.20	34.72	peak
5	5850.000	48.18	2.29	50.47	68.20	-17.73	peak
6	5852.500	52.26	2.30	54.56	68.20	-13.64	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5710 MHz		
Remark:			

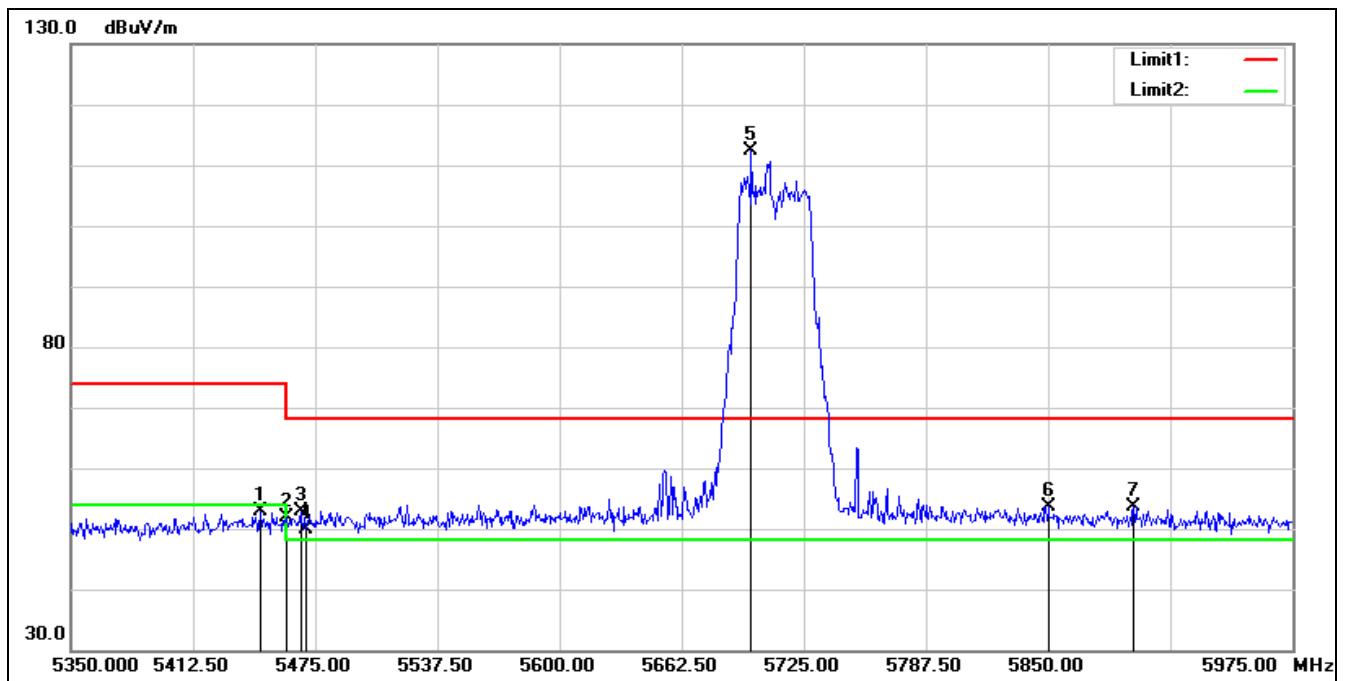

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT40 5710 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.875	51.07	1.71	52.78	74.00	-21.22	peak
2	5460.000	50.13	1.75	51.88	74.00	-22.12	peak
3	5467.500	51.14	1.76	52.90	68.20	-15.30	peak
4	5470.000	48.20	1.77	49.97	68.20	-18.23	peak
5*	5698.125	110.72	1.54	112.26	68.20	44.06	peak
6	5850.000	51.27	2.29	53.56	68.20	-14.64	peak
7	5893.750	51.26	2.37	53.63	68.20	-14.57	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5755 MHz

Remark:

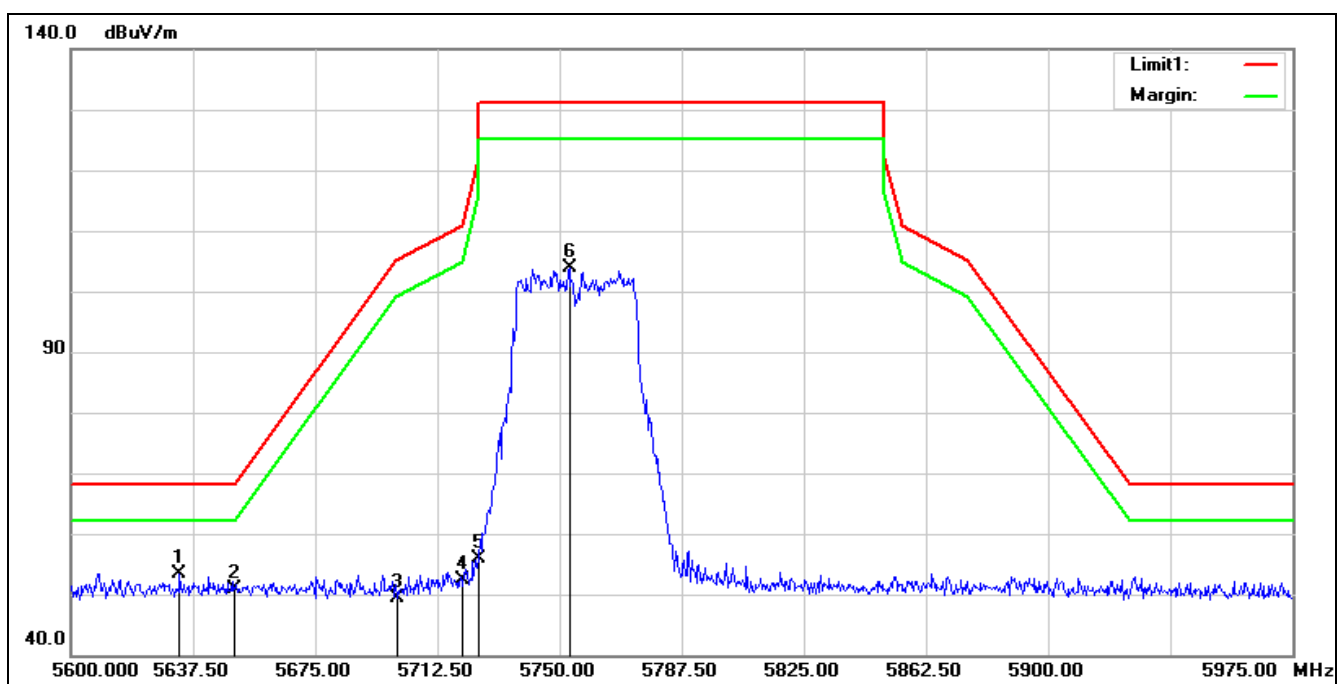


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5633.375	51.90	1.59	53.49	68.20	-14.71	peak
2	5650.000	49.21	1.56	50.77	68.20	-17.43	peak
3	5700.000	47.88	1.54	49.42	105.20	-55.78	peak
4	5720.000	50.63	1.74	52.37	110.80	-58.43	peak
5	5725.000	54.10	1.78	55.88	122.20	-66.32	peak
6	5753.000	101.85	2.03	103.88	131.20	-27.32	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT40 5755 MHz

Remark:

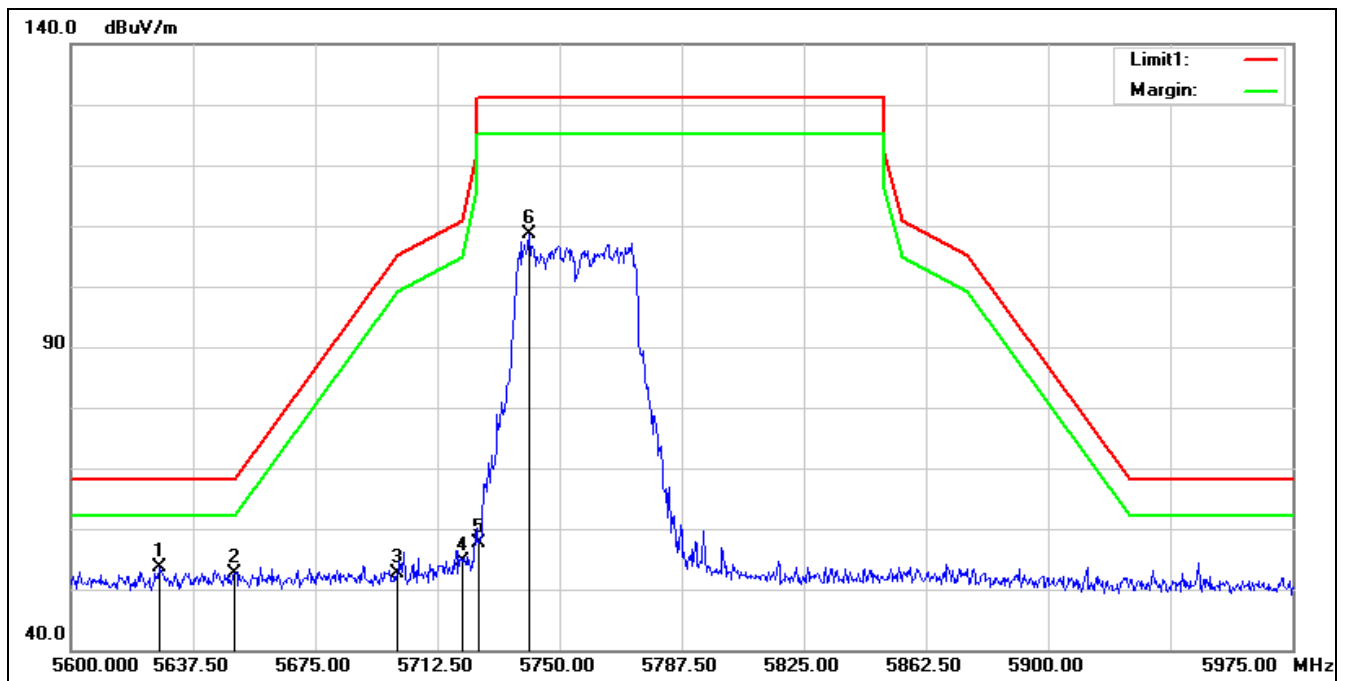


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5627.000	51.95	1.61	53.56	68.20	-14.64	peak
2	5650.000	51.11	1.56	52.67	68.20	-15.53	peak
3	5700.000	51.16	1.54	52.70	105.20	-52.50	peak
4	5720.000	52.96	1.74	54.70	110.80	-56.10	peak
5	5725.000	55.77	1.78	57.55	122.20	-64.65	peak
6	5740.625	106.67	1.93	108.60	131.20	-22.60	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT40 5795 MHz

Remark:

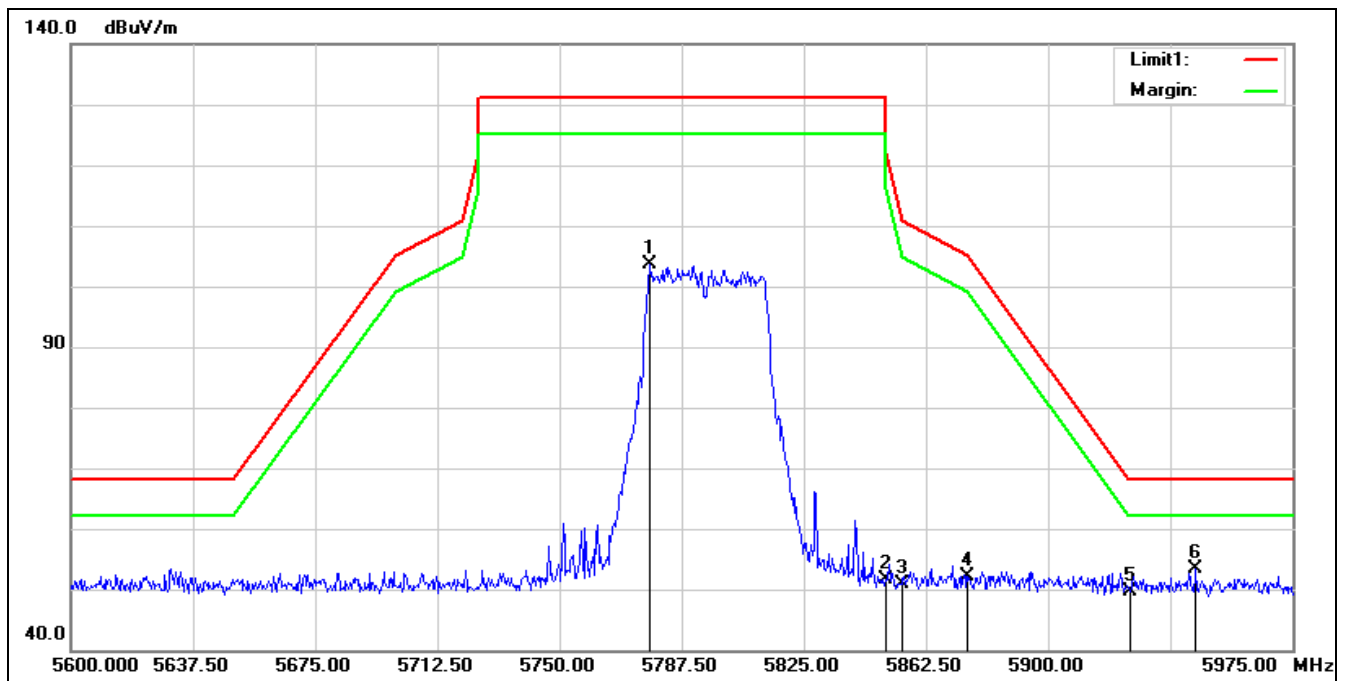


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5777.750	101.54	2.13	103.67	131.20	-27.53	peak
2	5850.000	49.42	2.29	51.71	122.20	-70.49	peak
3	5855.000	48.45	2.31	50.76	110.80	-60.04	peak
4	5875.000	49.81	2.34	52.15	105.20	-53.05	peak
5	5925.000	47.34	2.23	49.57	68.20	-18.63	peak
6*	5945.375	51.16	2.10	53.26	68.20	-14.94	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT40 5795 MHz

Remark:

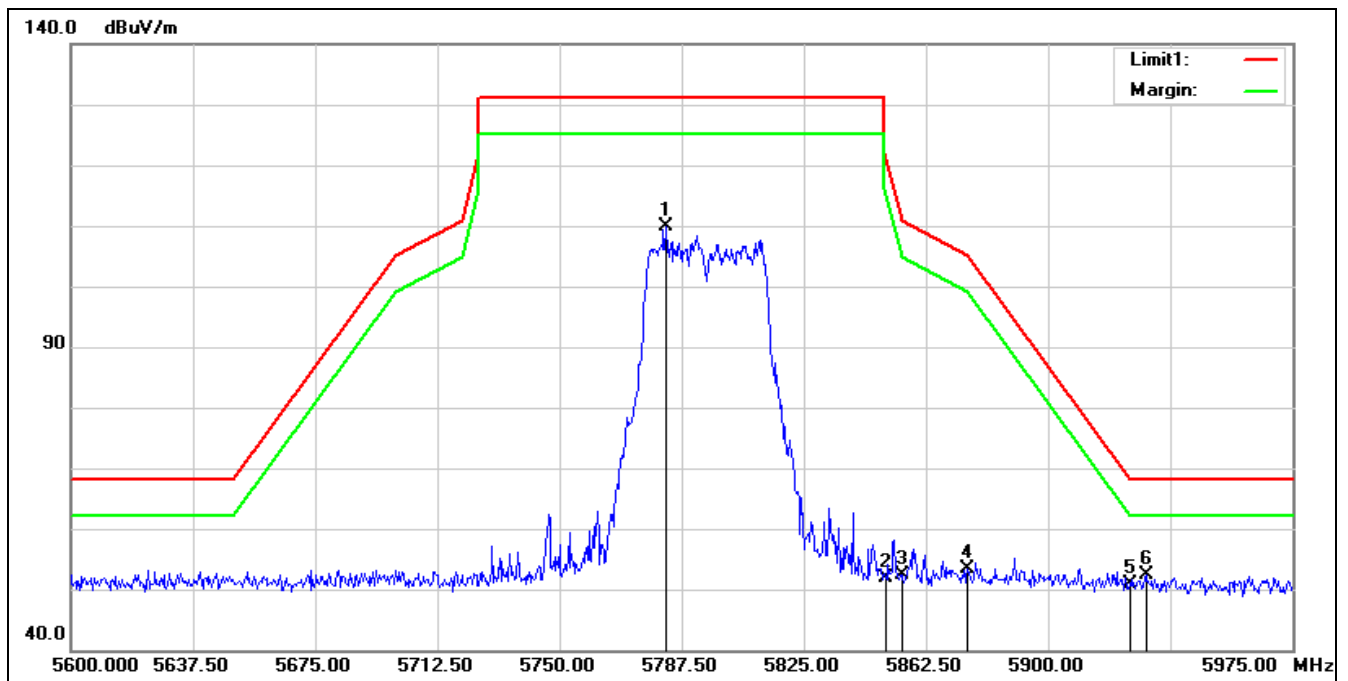


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5782.625	107.79	2.14	109.93	131.20	-21.27	peak
2	5850.000	49.50	2.29	51.79	122.20	-70.41	peak
3	5855.000	49.98	2.31	52.29	110.80	-58.51	peak
4	5875.000	51.15	2.34	53.49	105.20	-51.71	peak
5	5925.000	48.68	2.23	50.91	68.20	-17.29	peak
6*	5930.000	50.12	2.19	52.31	68.20	-15.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5210 MHz		
Remark:			

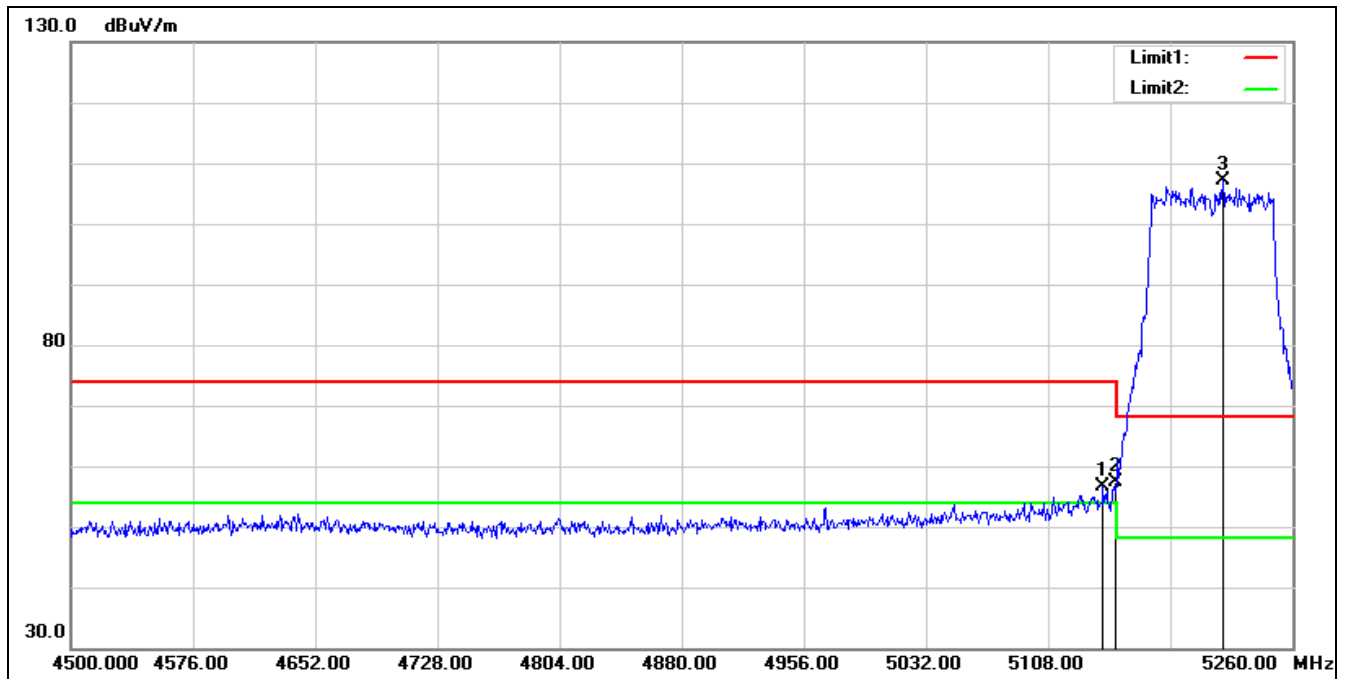

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	55.26	1.39	56.65	74.00	-17.35	peak
2	5150.000	55.94	1.38	57.32	74.00	-16.68	peak
3*	5216.680	105.98	1.03	107.01	68.20	38.81	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5210 MHz		
Remark:			

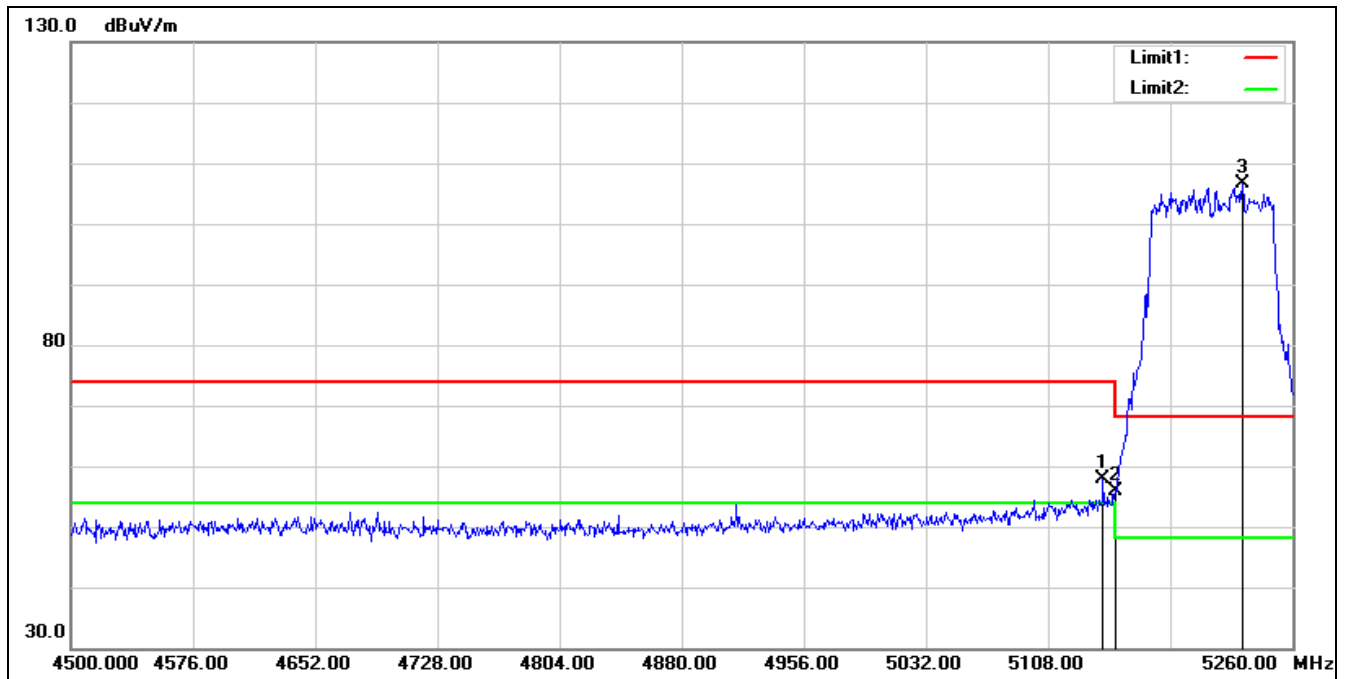


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.200	56.56	1.39	57.95	74.00	-16.05	peak
2	5150.000	54.43	1.38	55.81	74.00	-18.19	peak
3*	5228.840	105.61	0.94	106.55	68.20	38.35	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT80 5290 MHz

Remark:

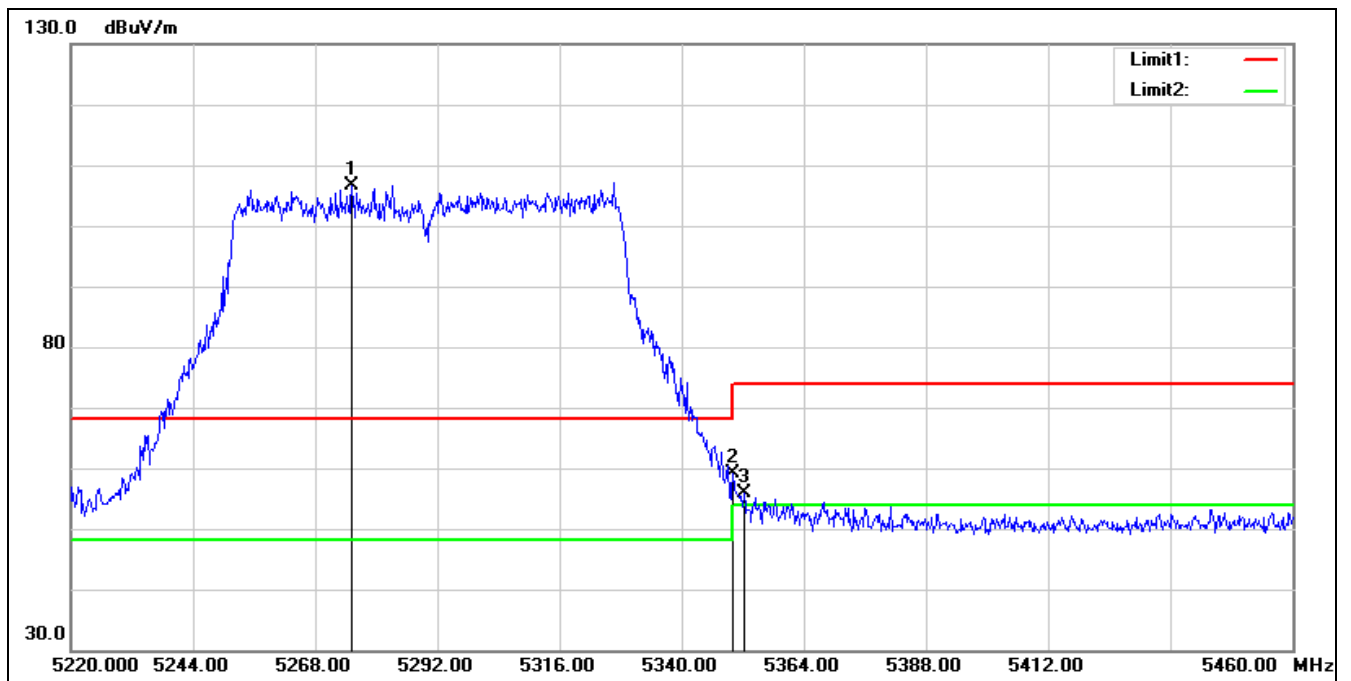


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5275.200	105.90	0.73	106.63	68.20	38.43	peak
2	5350.000	58.14	1.02	59.16	74.00	-14.84	peak
3	5352.240	54.83	1.03	55.86	74.00	-18.14	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT80 5290 MHz

Remark:

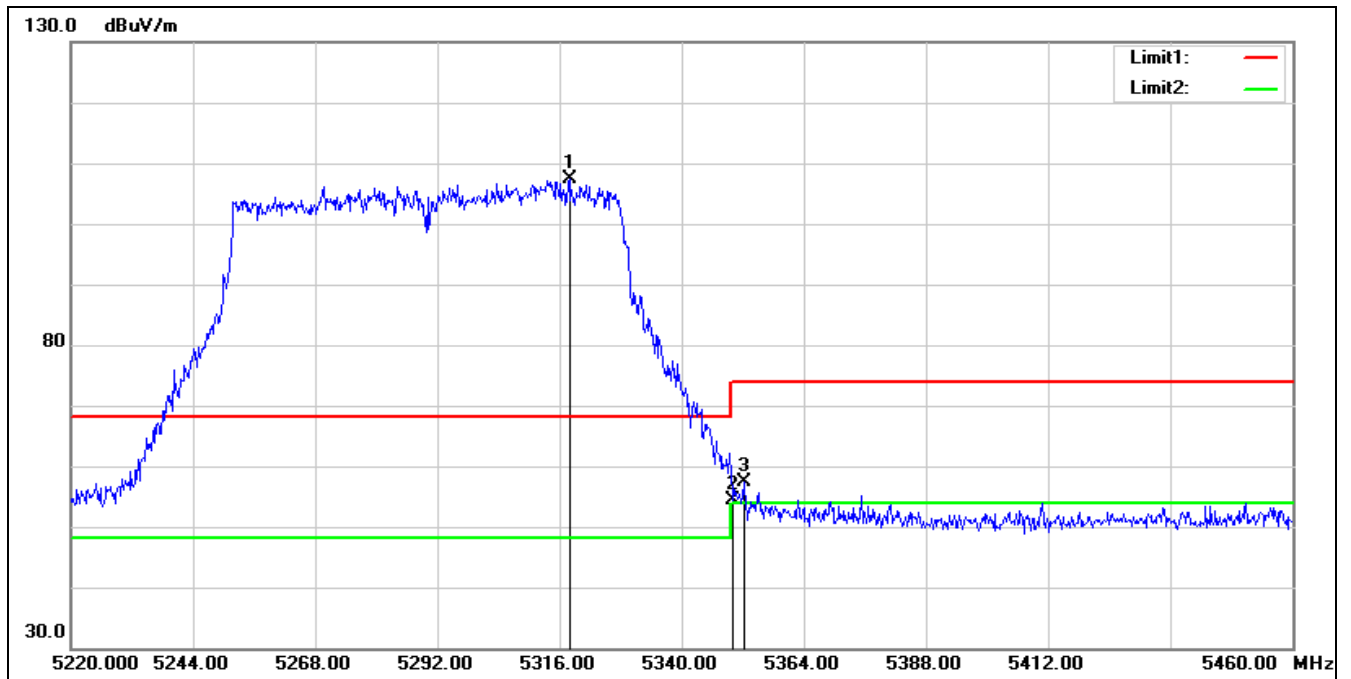


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5317.920	106.65	0.79	107.44	68.20	39.24	peak
2	5350.000	53.41	1.02	54.43	74.00	-19.57	peak
3	5352.240	56.40	1.03	57.43	74.00	-16.57	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT80 5530 MHz

Remark:

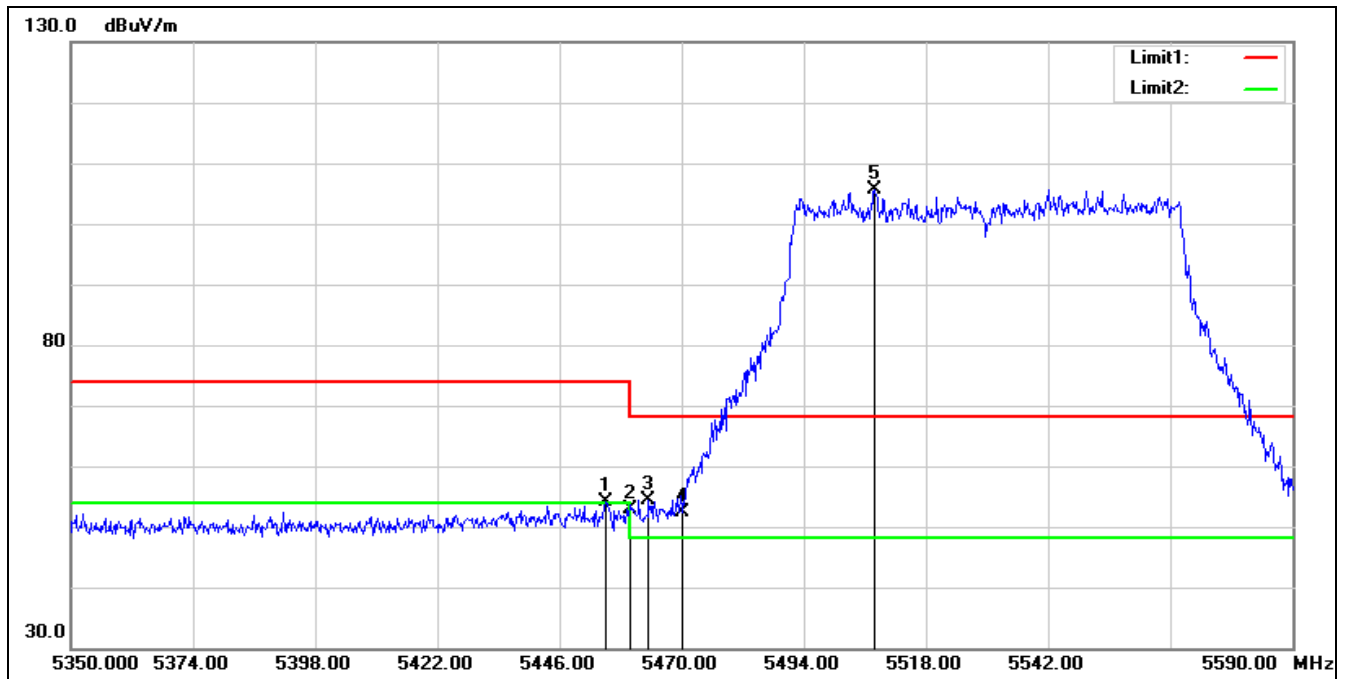


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5455.120	52.42	1.75	54.17	74.00	-19.83	peak
2	5460.000	51.20	1.75	52.95	74.00	-21.05	peak
3	5463.520	52.55	1.75	54.30	68.20	-13.90	peak
4	5470.000	50.66	1.77	52.43	68.20	-15.77	peak
5*	5507.920	103.76	1.80	105.56	68.20	37.36	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5530 MHz

Remark:

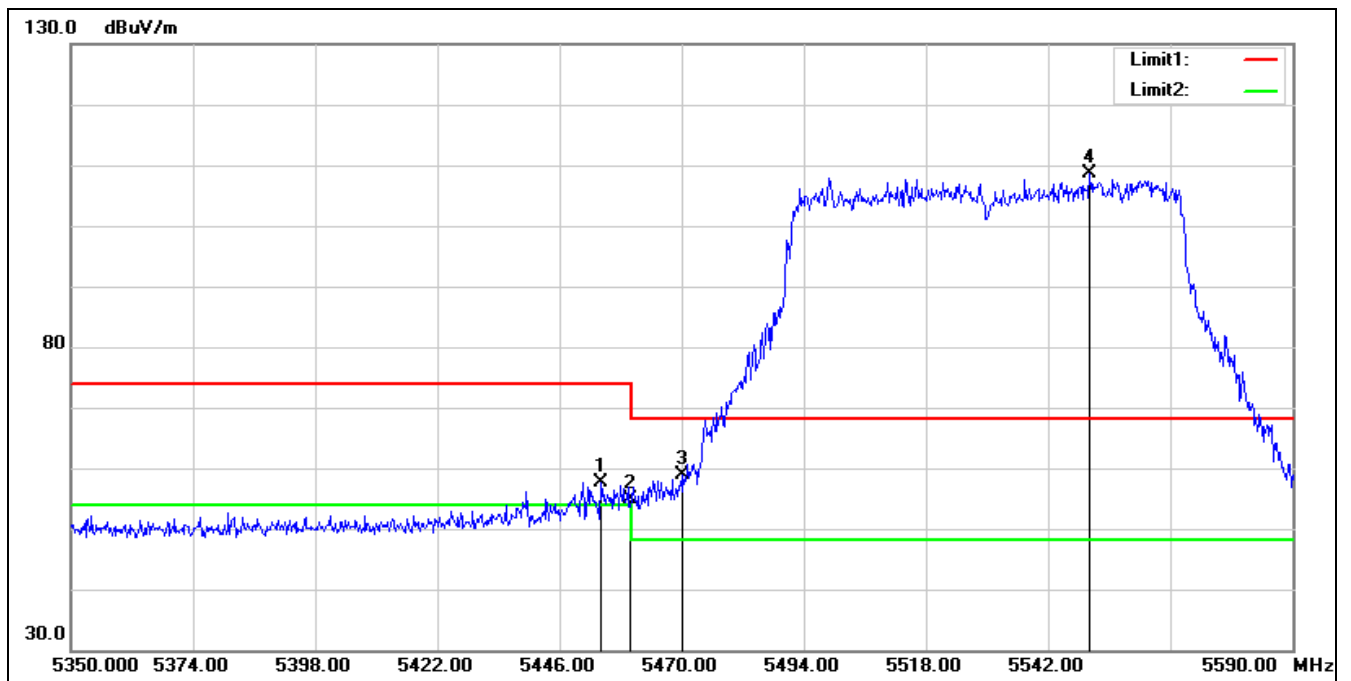

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.160	55.90	1.75	57.65	74.00	-16.35	peak
2	5460.000	53.18	1.75	54.93	74.00	-19.07	peak
3	5470.000	57.12	1.77	58.89	68.20	-9.31	peak
4*	5550.160	106.80	1.79	108.59	68.20	40.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			

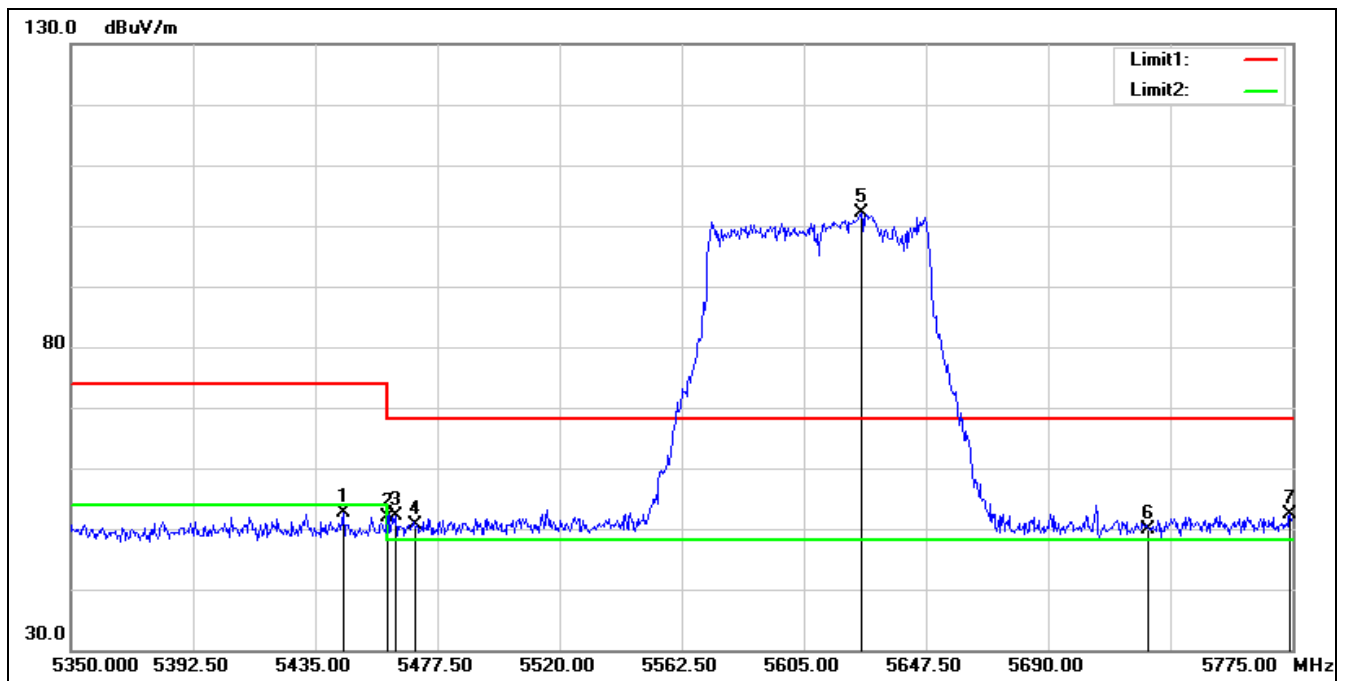

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5610 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.775	50.84	1.70	52.54	74.00	-21.46	peak
2	5460.000	50.10	1.75	51.85	74.00	-22.15	peak
3	5463.050	50.40	1.75	52.15	68.20	-16.05	peak
4	5470.000	48.92	1.77	50.69	68.20	-17.51	peak
5*	5624.975	100.54	1.61	102.15	68.20	33.95	peak
6	5725.000	48.11	1.78	49.89	68.20	-18.31	peak
7	5774.150	50.22	2.12	52.34	68.20	-15.86	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5610 MHz

Remark:

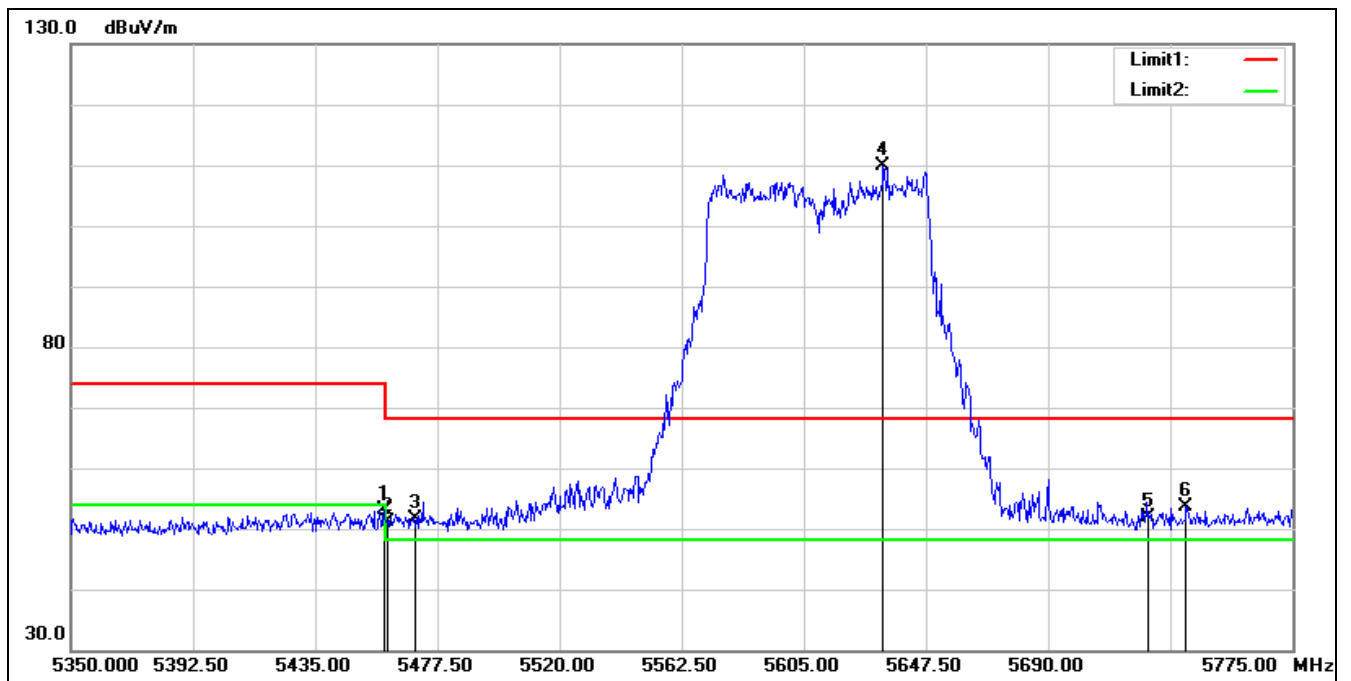

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5458.800	51.43	1.75	53.18	74.00	-20.82	peak
2	5460.000	49.49	1.75	51.24	74.00	-22.76	peak
3	5470.000	49.74	1.77	51.51	68.20	-16.69	peak
4*	5632.625	108.17	1.59	109.76	68.20	41.56	peak
5	5725.000	49.99	1.78	51.77	68.20	-16.43	peak
6	5738.025	51.83	1.91	53.74	68.20	-14.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			

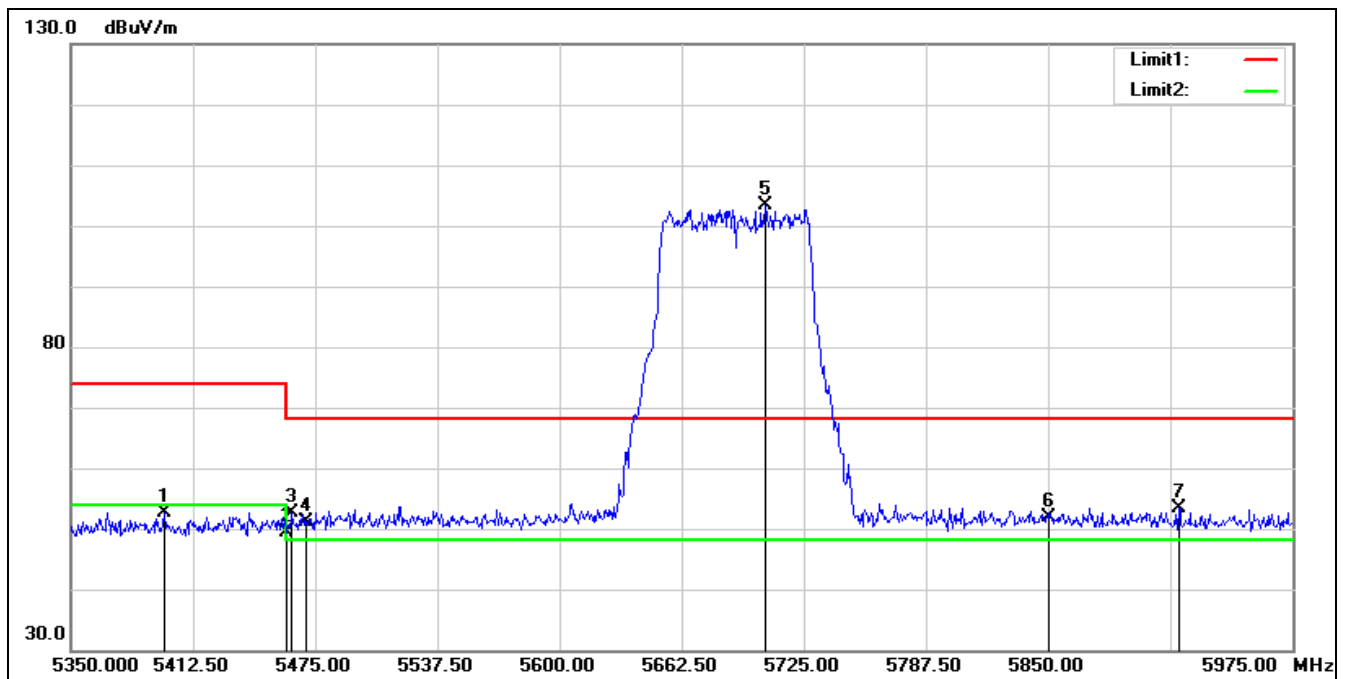

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5690 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5397.500	51.30	1.37	52.67	74.00	-21.33	peak
2	5460.000	47.66	1.75	49.41	74.00	-24.59	peak
3	5463.125	50.86	1.75	52.61	68.20	-15.59	peak
4	5470.000	49.41	1.77	51.18	68.20	-17.02	peak
5*	5705.000	101.86	1.59	103.45	68.20	35.25	peak
6	5850.000	49.70	2.29	51.99	68.20	-16.21	peak
7	5916.875	51.19	2.27	53.46	68.20	-14.74	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11ac VHT80 5690 MHz

Remark:

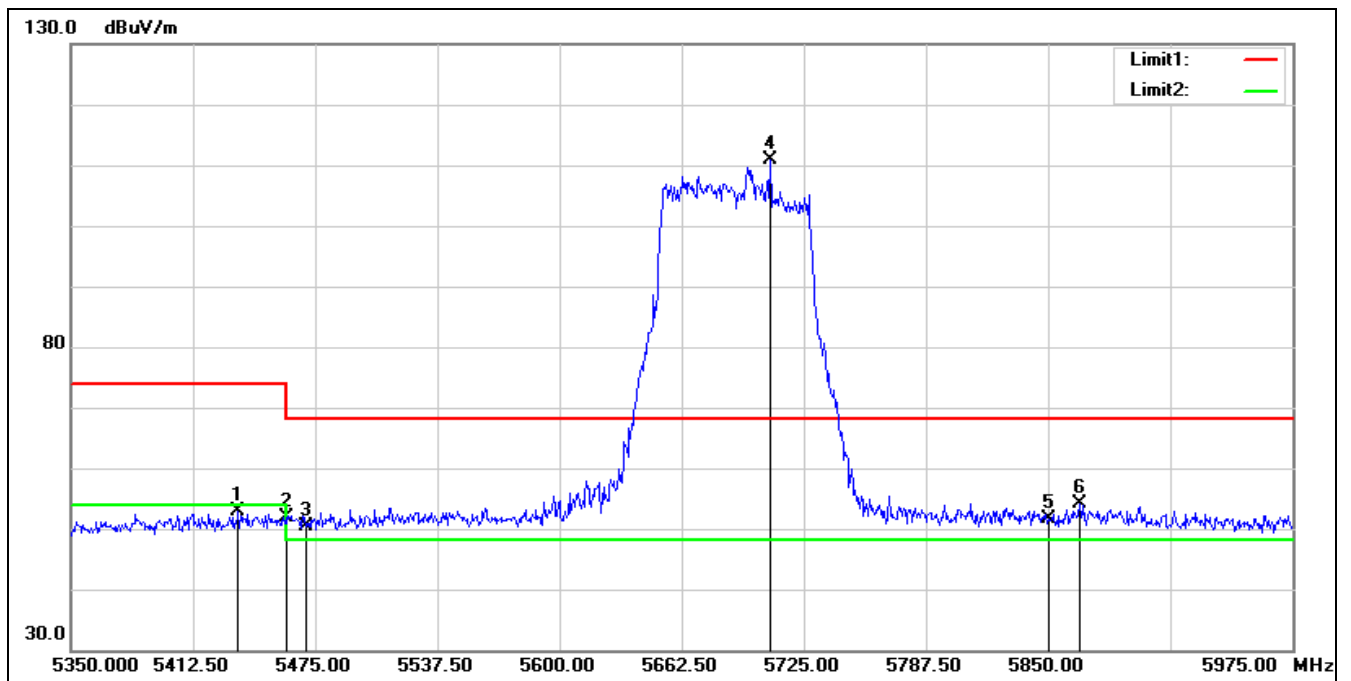

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5435.625	51.28	1.63	52.91	74.00	-21.09	peak
2	5460.000	50.18	1.75	51.93	74.00	-22.07	peak
3	5470.000	48.60	1.77	50.37	68.20	-17.83	peak
4*	5707.500	109.28	1.61	110.89	68.20	42.69	peak
5	5850.000	49.30	2.29	51.59	68.20	-16.61	peak
6	5866.250	51.86	2.32	54.18	68.20	-14.02	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

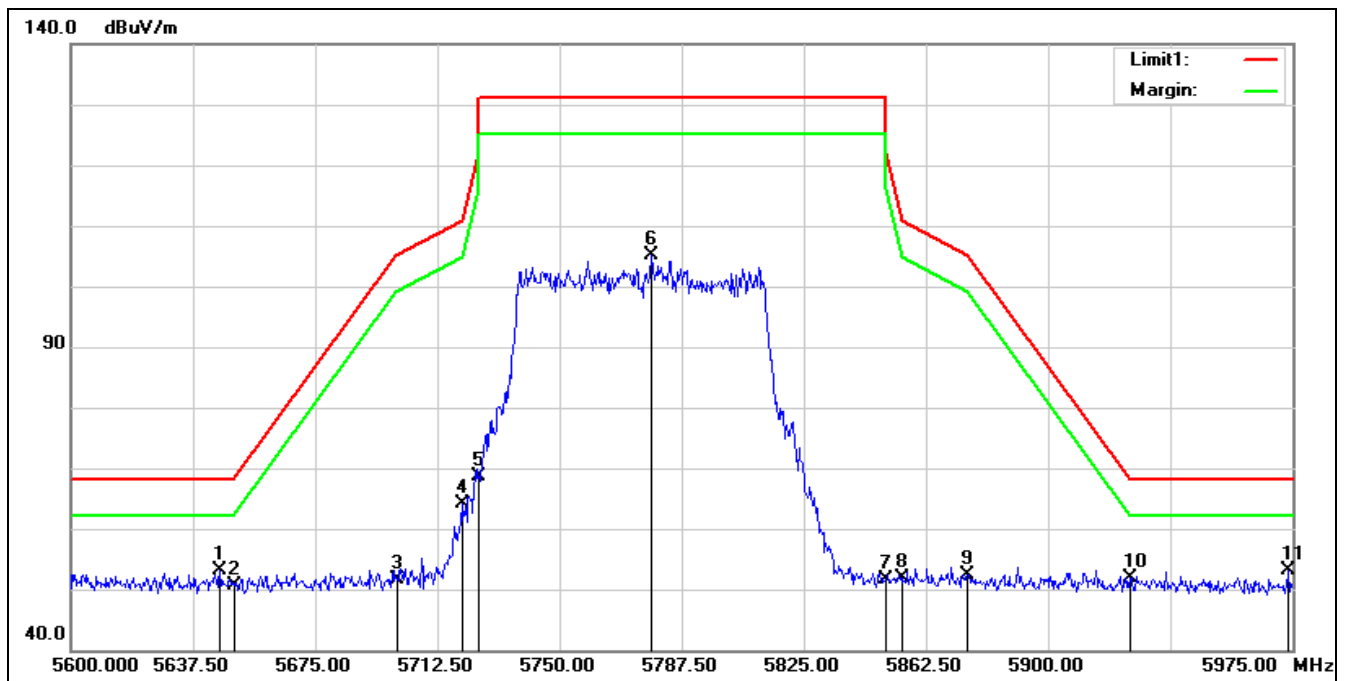

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.750	51.54	1.56	53.10	68.20	-15.10	peak
2	5650.000	49.14	1.56	50.70	68.20	-17.50	peak
3	5700.000	49.98	1.54	51.52	105.20	-53.68	peak
4	5720.000	62.41	1.74	64.15	110.80	-46.65	peak
5	5725.000	66.85	1.78	68.63	122.20	-53.57	peak
6	5778.125	103.07	2.13	105.20	131.20	-26.00	peak
7	5850.000	49.42	2.29	51.71	122.20	-70.49	peak
8	5855.000	49.57	2.31	51.88	110.80	-58.92	peak
9	5875.000	50.07	2.34	52.41	105.20	-52.79	peak
10	5925.000	49.65	2.23	51.88	68.20	-16.32	peak
11*	5973.875	51.12	2.11	53.23	68.20	-14.97	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			

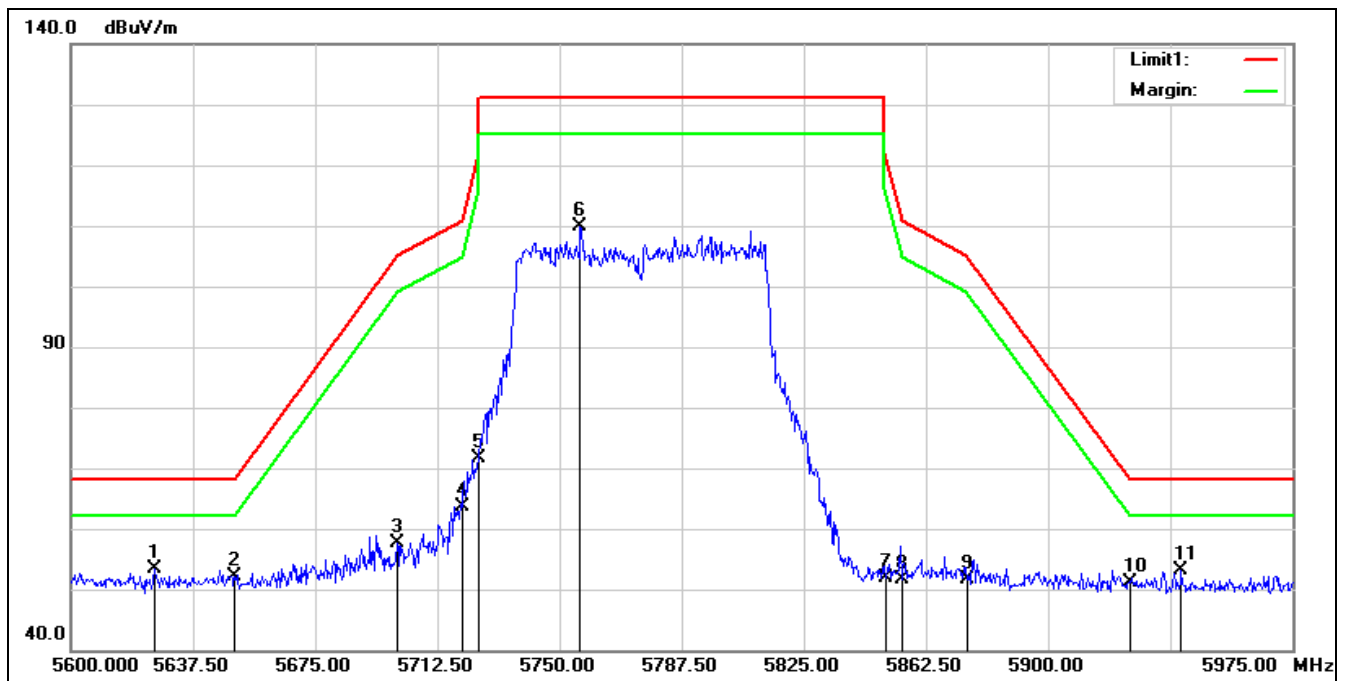

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT80 5775 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5625.500	51.80	1.61	53.41	68.20	-14.79	peak
2	5650.000	50.51	1.56	52.07	68.20	-16.13	peak
3	5700.000	56.10	1.54	57.64	105.20	-47.56	peak
4	5720.000	61.98	1.74	63.72	110.80	-47.08	peak
5	5725.000	69.75	1.78	71.53	122.20	-50.67	peak
6	5756.375	107.92	2.05	109.97	131.20	-21.23	peak
7	5850.000	49.48	2.29	51.77	122.20	-70.43	peak
8	5855.000	49.24	2.31	51.55	110.80	-59.25	peak
9	5875.000	49.35	2.34	51.69	105.20	-53.51	peak
10	5925.000	48.93	2.23	51.16	68.20	-17.04	peak
11	5940.875	51.03	2.12	53.15	68.20	-15.05	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11ac VHT160 5250 MHz

Remark:

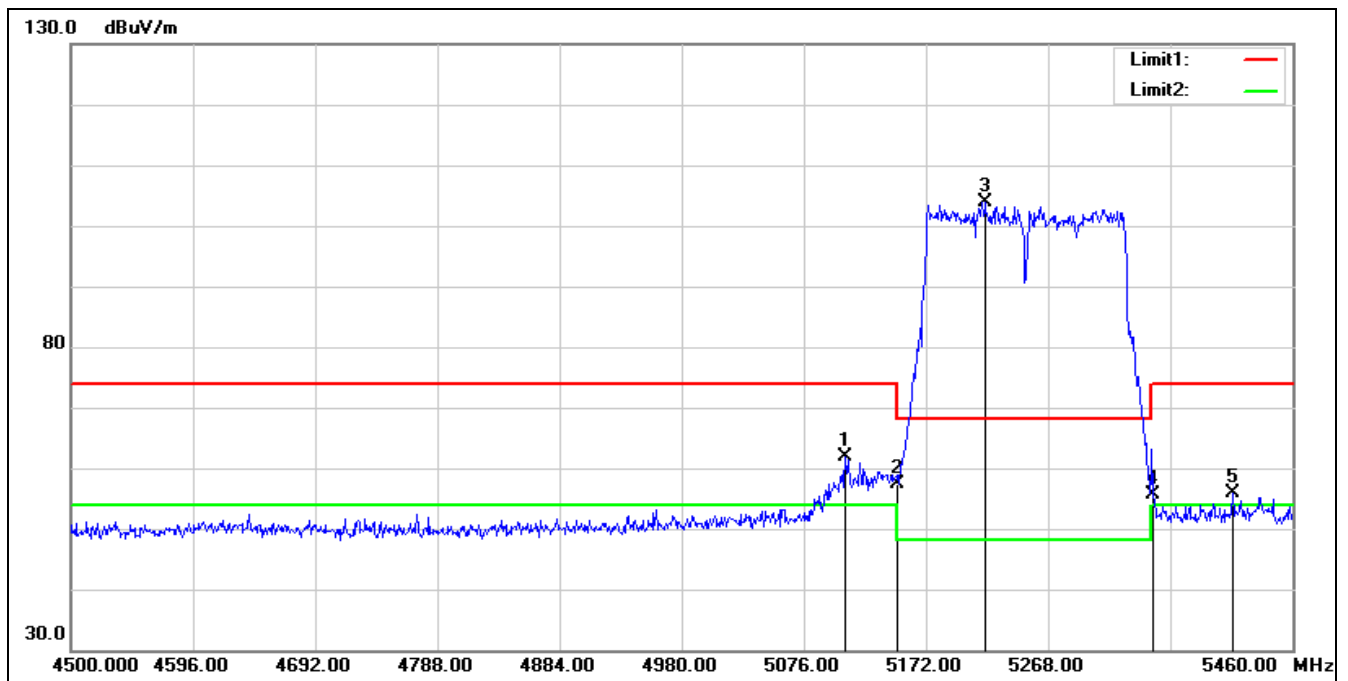


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5108.640	60.58	1.41	61.99	74.00	-12.01	peak
2	5150.000	56.12	1.38	57.50	74.00	-16.50	peak
3*	5218.080	102.87	1.02	103.89	68.20	35.69	peak
4	5350.000	54.73	1.02	55.75	74.00	-18.25	peak
5	5412.960	54.35	1.48	55.83	74.00	-18.17	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11ac VHT160 5250 MHz

Remark:

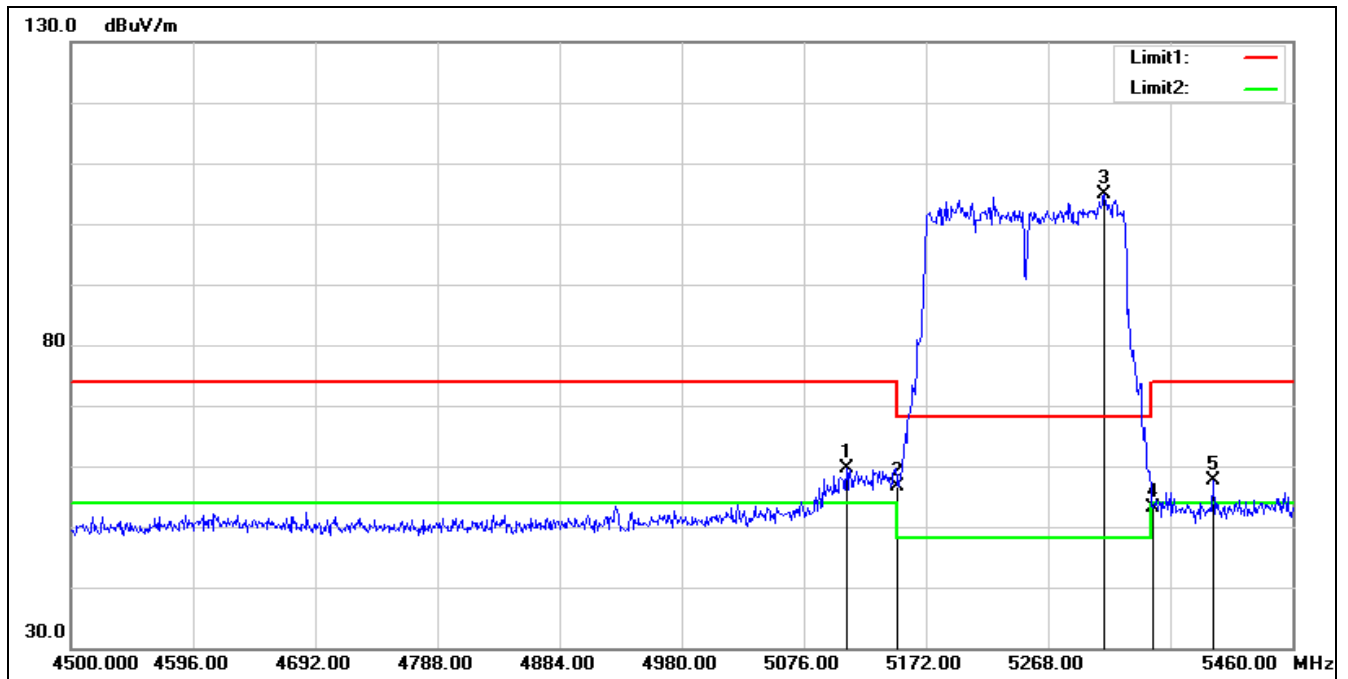


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5109.600	58.27	1.41	59.68	74.00	-14.32	peak
2	5150.000	55.25	1.38	56.63	74.00	-17.37	peak
3*	5312.160	104.05	0.74	104.79	68.20	36.59	peak
4	5350.000	52.18	1.02	53.20	74.00	-20.80	peak
5	5397.600	56.36	1.37	57.73	74.00	-16.27	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11ac VHT160 5570 MHz

Remark:

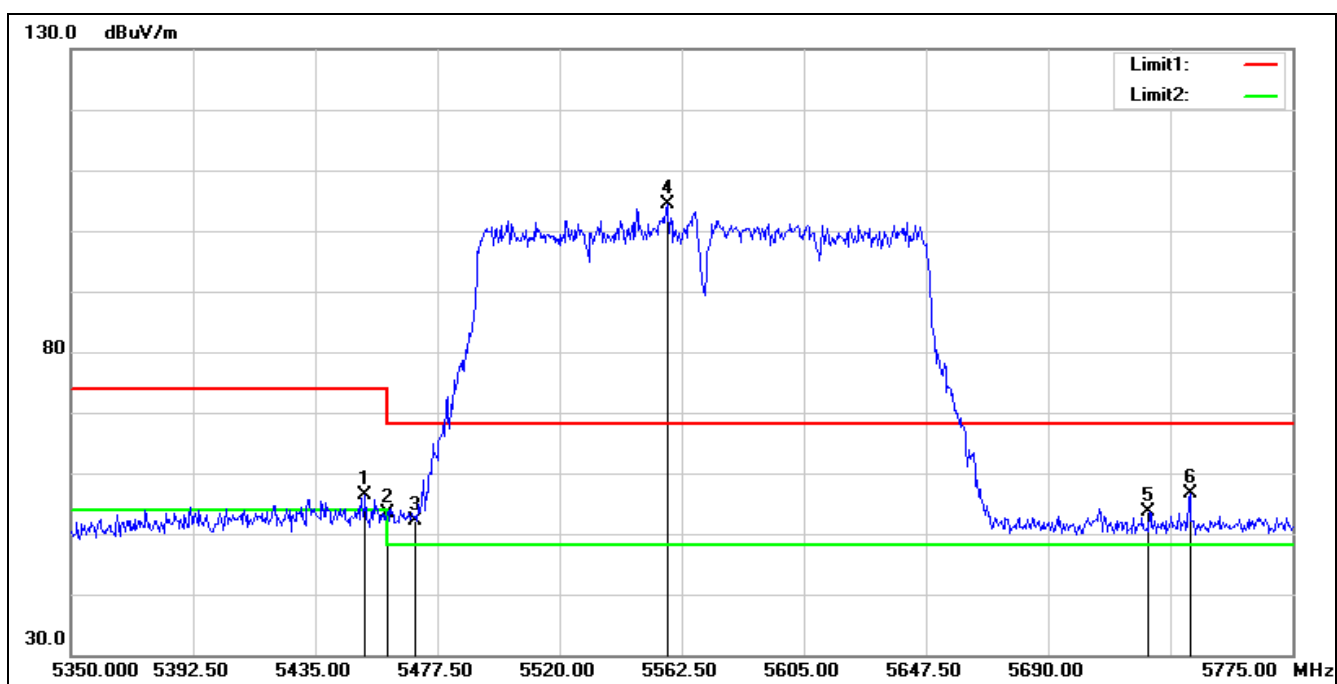

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.425	54.71	1.75	56.46	74.00	-17.54	peak
2	5460.000	51.54	1.75	53.29	74.00	-20.71	peak
3	5470.000	50.33	1.77	52.10	68.20	-16.10	peak
4*	5557.400	102.69	1.77	104.46	68.20	36.26	peak
5	5725.000	51.88	1.78	53.66	68.20	-14.54	peak
6	5739.300	54.63	1.92	56.55	68.20	-11.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			

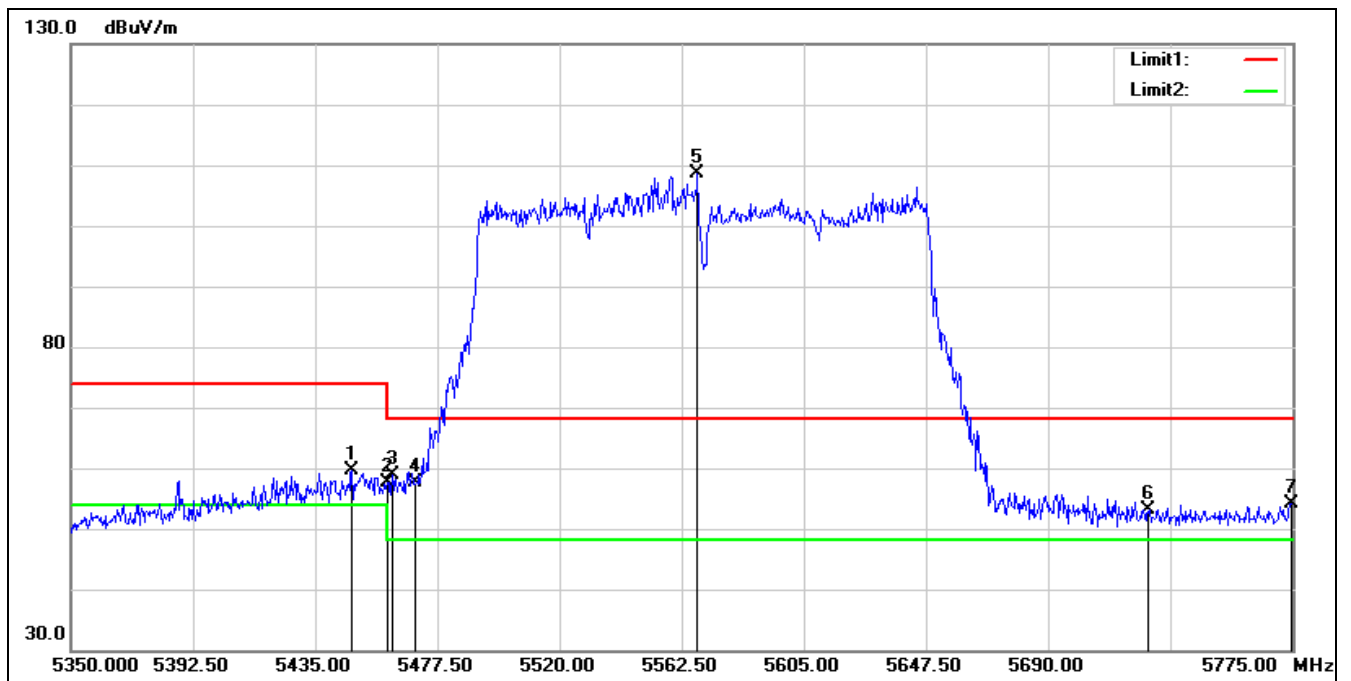

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11ac VHT160 5570 MHz		
Remark:			


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.750	57.98	1.72	59.70	74.00	-14.30	peak
2	5460.000	55.83	1.75	57.58	74.00	-16.42	peak
3	5461.775	57.20	1.75	58.95	68.20	-9.25	peak
4	5470.000	55.75	1.77	57.52	68.20	-10.68	peak
5*	5568.025	106.78	1.74	108.52	68.20	40.32	peak
6	5725.000	51.43	1.78	53.21	68.20	-14.99	peak
7	5774.575	52.09	2.12	54.21	68.20	-13.99	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5180 MHz

Remark:

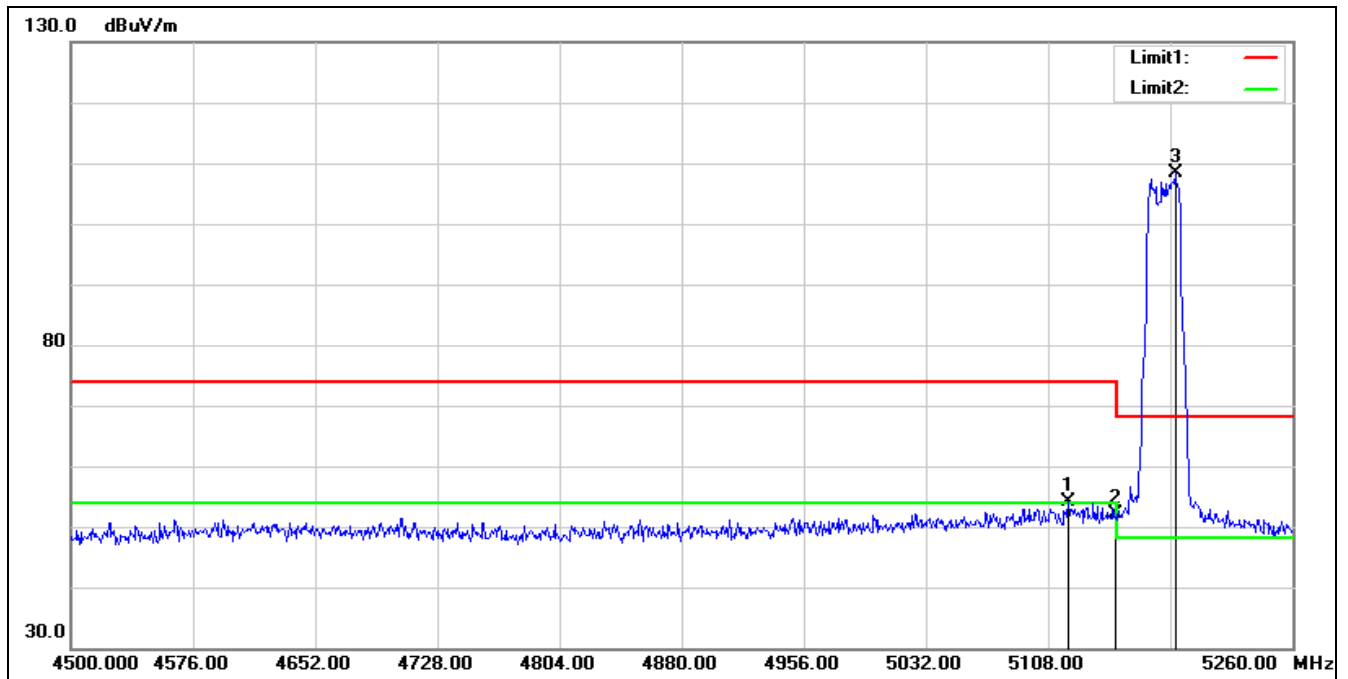


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.160	52.70	1.41	54.11	74.00	-19.89	peak
2	5150.000	50.71	1.38	52.09	74.00	-21.91	peak
3*	5187.040	107.21	1.20	108.41	68.20	40.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5180 MHz

Remark:

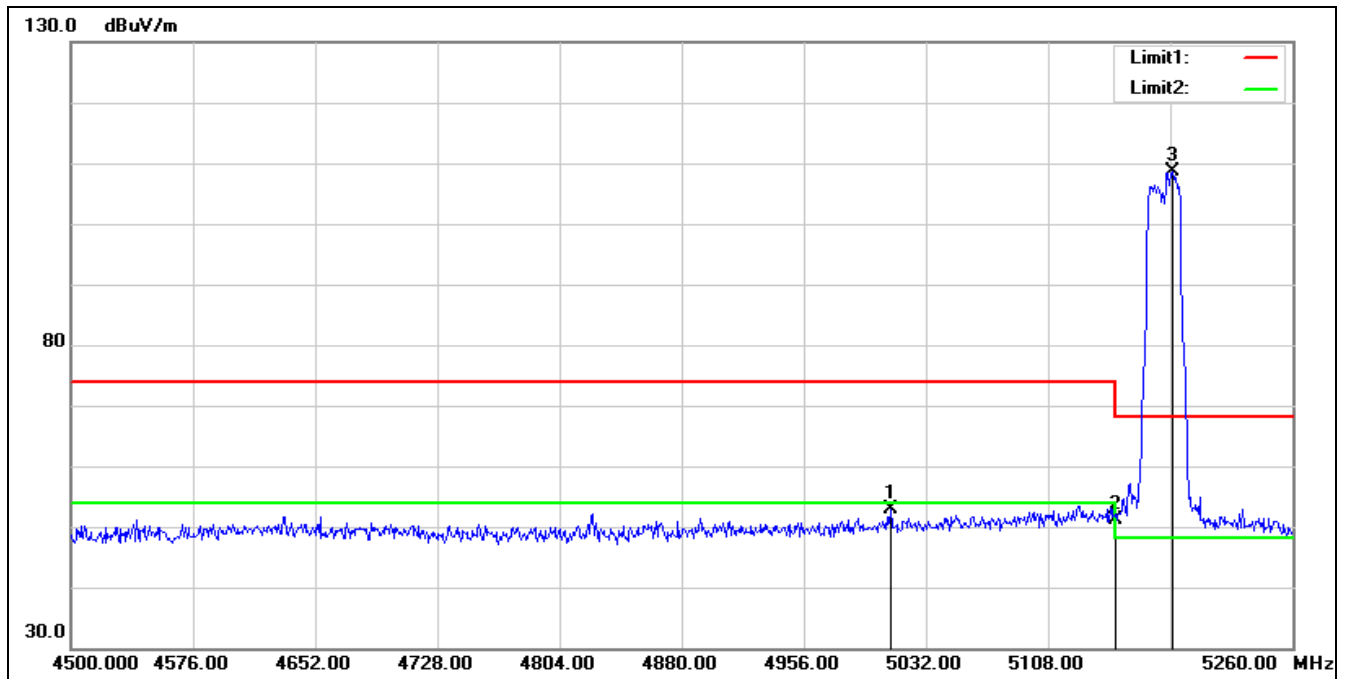

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5009.960	52.12	0.71	52.83	74.00	-21.17	peak
2	5150.000	49.85	1.38	51.23	74.00	-22.77	peak
3*	5185.520	107.45	1.21	108.66	68.20	40.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5200 MHz		
Remark:			

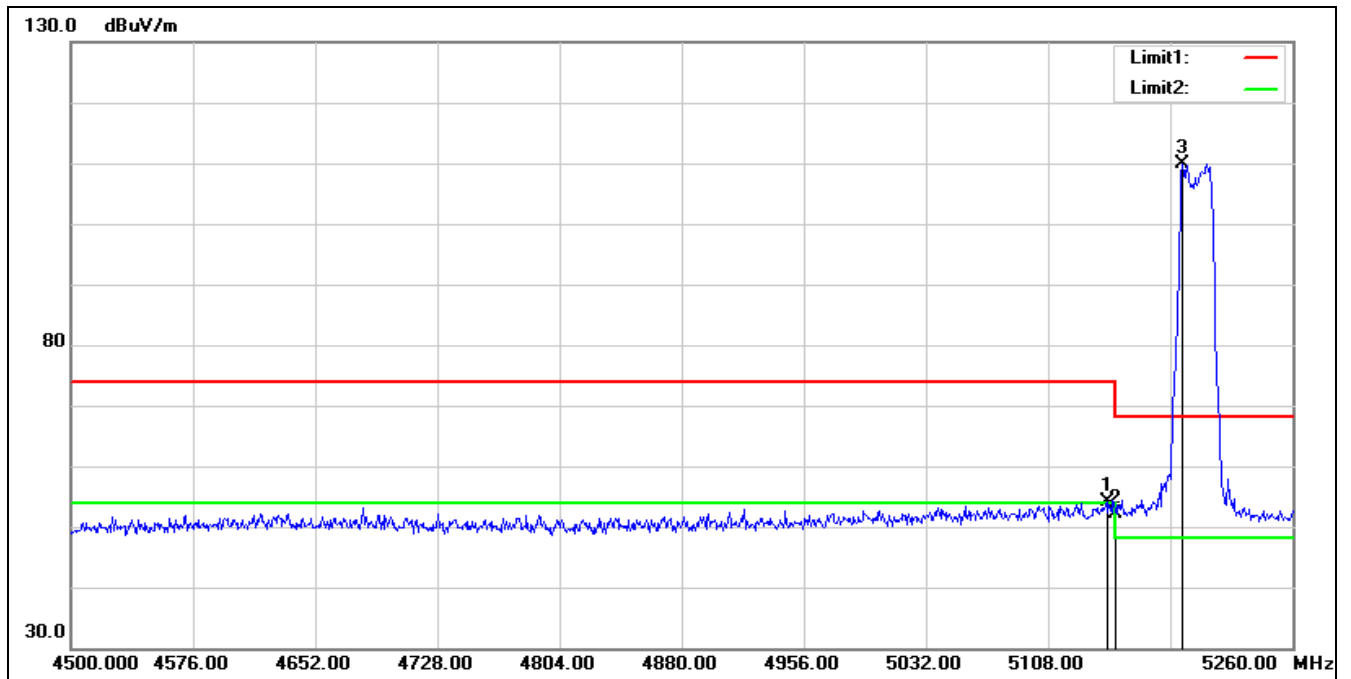


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.480	52.72	1.38	54.10	74.00	-19.90	peak
2	5150.000	50.65	1.38	52.03	74.00	-21.97	peak
3*	5191.600	108.75	1.18	109.93	68.20	41.73	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5200 MHz

Remark:

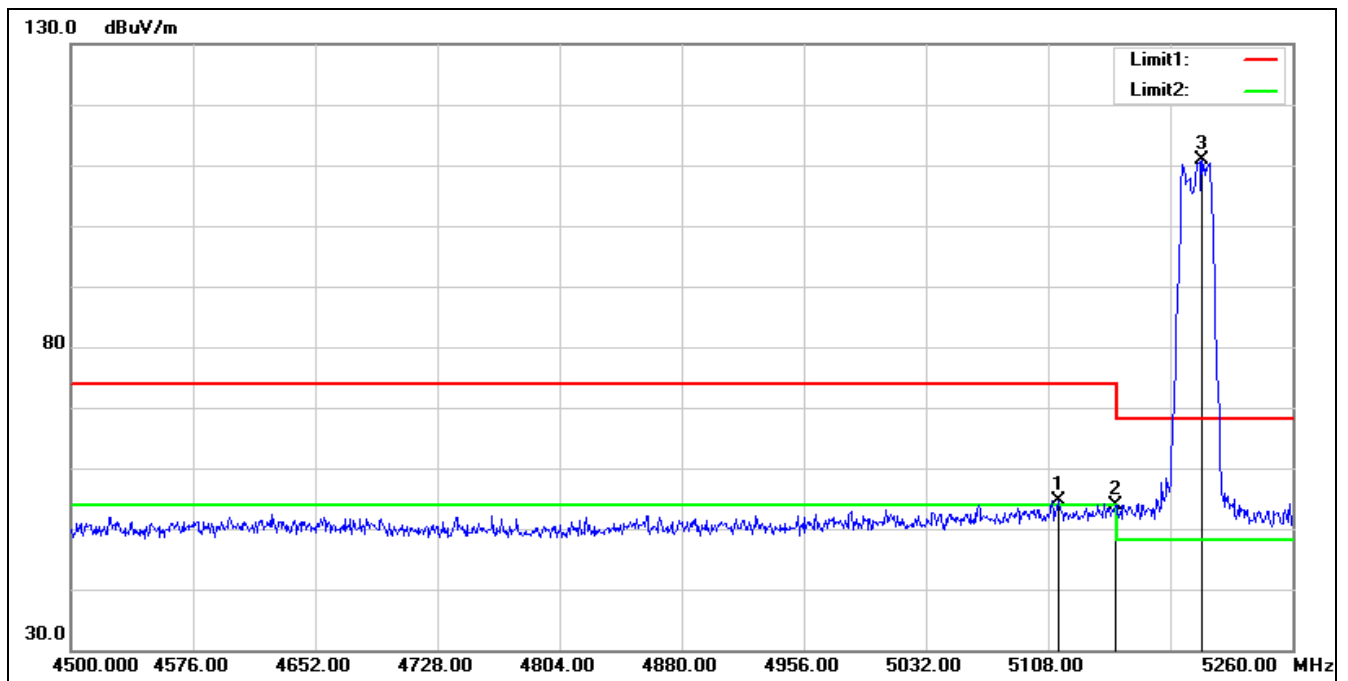


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5114.080	53.30	1.40	54.70	74.00	-19.30	peak
2	5150.000	52.41	1.38	53.79	74.00	-20.21	peak
3*	5203.760	109.74	1.12	110.86	68.20	42.66	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5240 MHz

Remark:

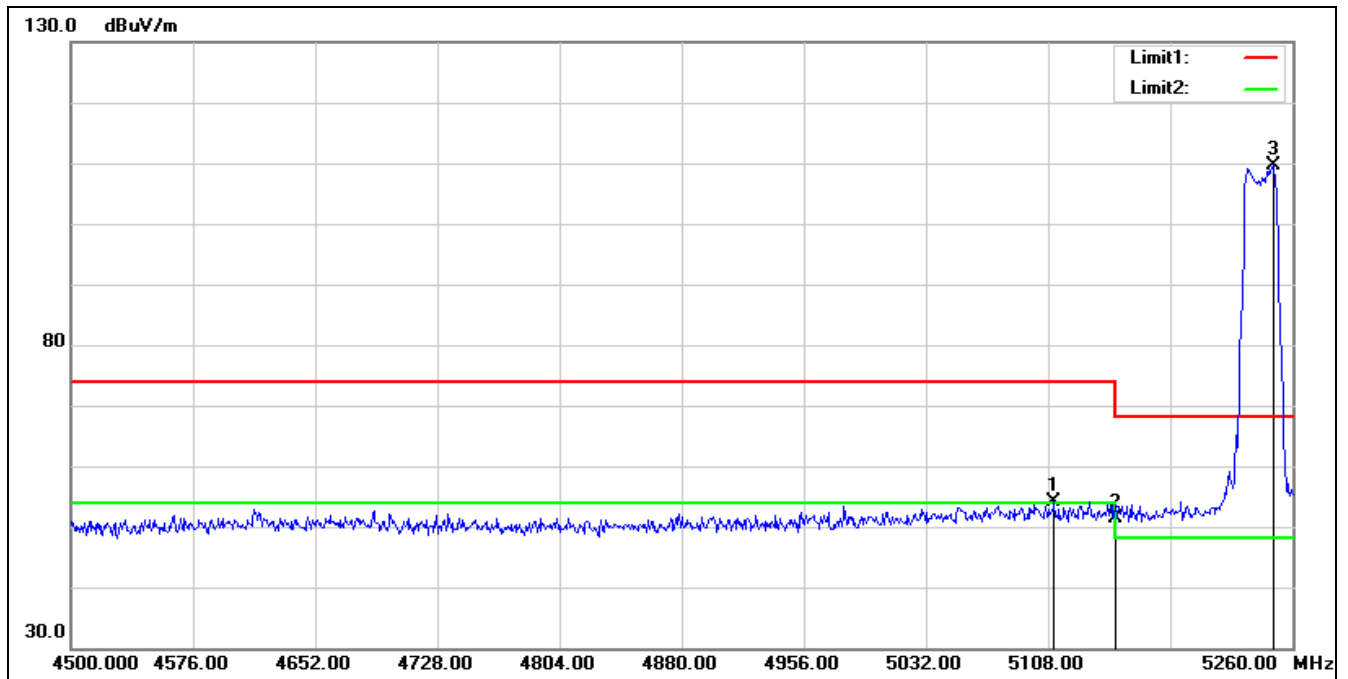


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5111.800	52.78	1.41	54.19	74.00	-19.81	peak
2	5150.000	49.95	1.38	51.33	74.00	-22.67	peak
3*	5247.840	108.87	0.82	109.69	68.20	41.49	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5240 MHz

Remark:

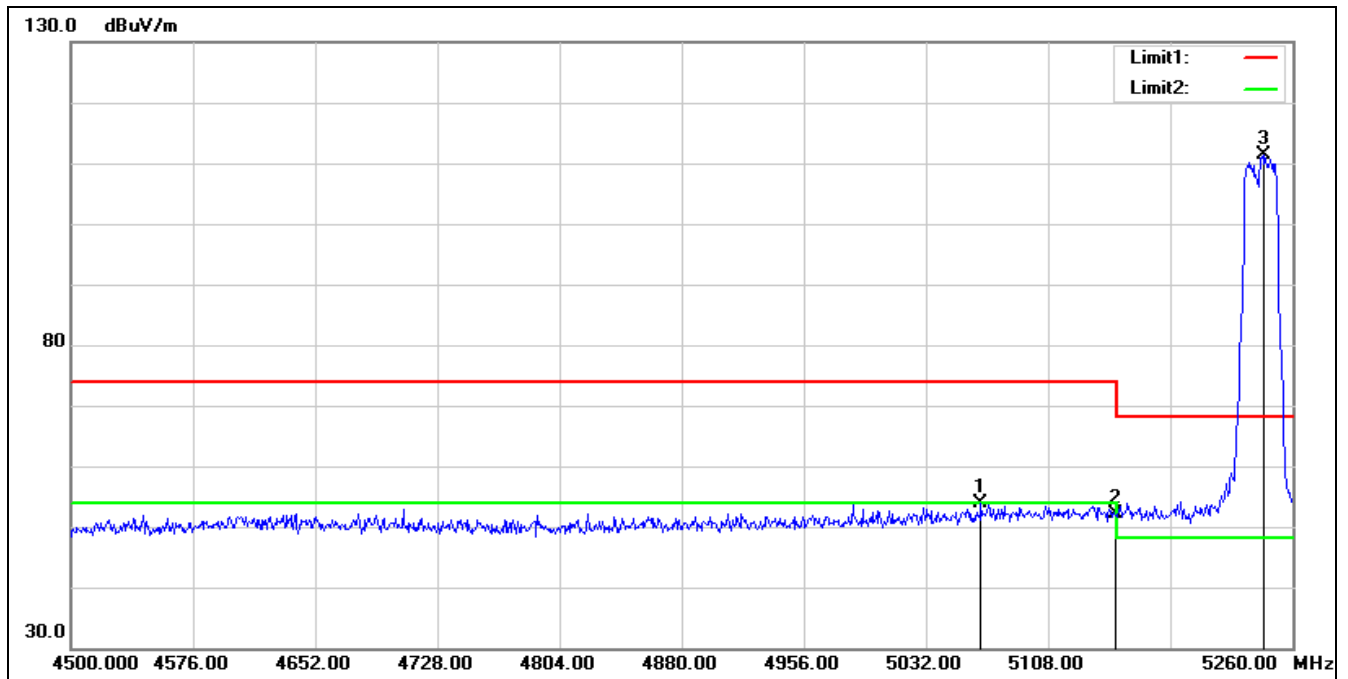


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5066.200	52.54	1.24	53.78	74.00	-20.22	peak
2	5150.000	50.83	1.38	52.21	74.00	-21.79	peak
3*	5241.760	110.60	0.86	111.46	68.20	43.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5260 MHz		
Remark:			

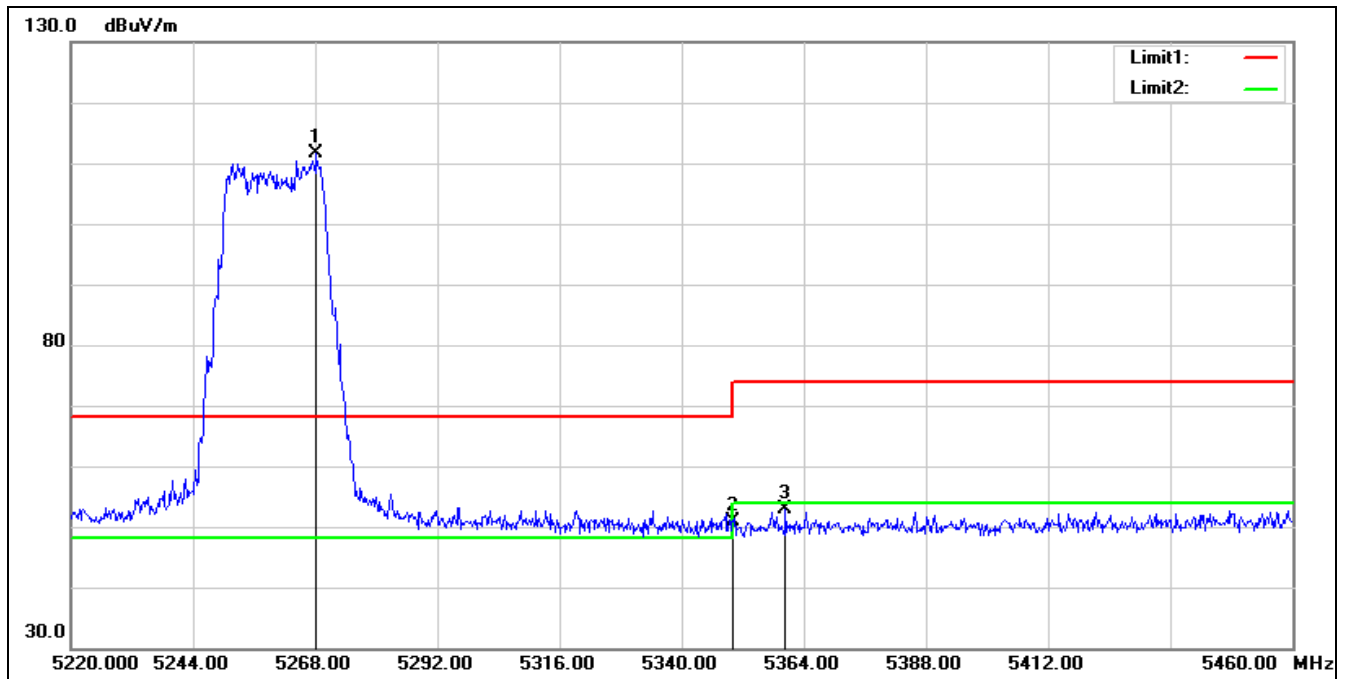

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5268.240	110.95	0.75	111.70	68.20	43.50	peak
2	5350.000	49.93	1.02	50.95	74.00	-23.05	peak
3	5360.400	51.78	1.09	52.87	74.00	-21.13	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5260 MHz
Remark:

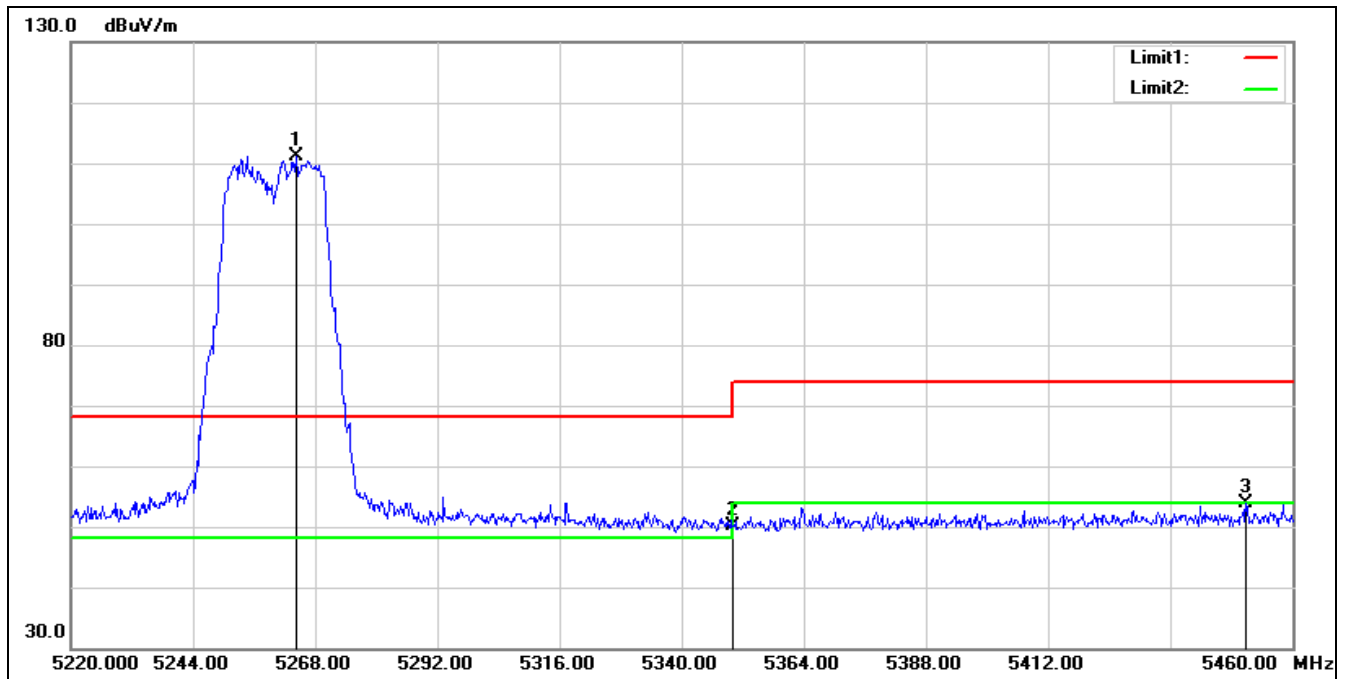


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5264.160	110.32	0.76	111.08	68.20	42.88	peak
2	5350.000	49.07	1.02	50.09	74.00	-23.91	peak
3	5450.880	52.05	1.74	53.79	74.00	-20.21	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5280 MHz

Remark:

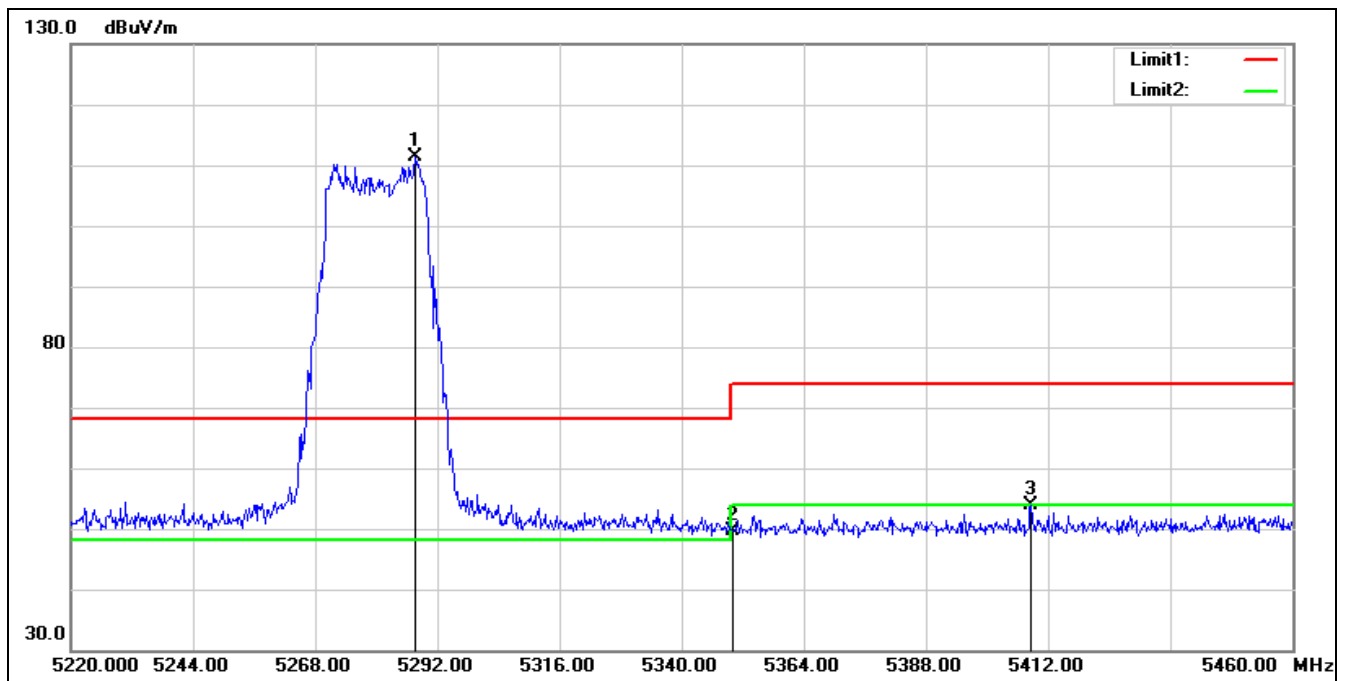


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5287.680	110.62	0.70	111.32	68.20	43.12	peak
2	5350.000	48.56	1.02	49.58	74.00	-24.42	peak
3	5408.640	52.32	1.44	53.76	74.00	-20.24	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5280 MHz
Remark:

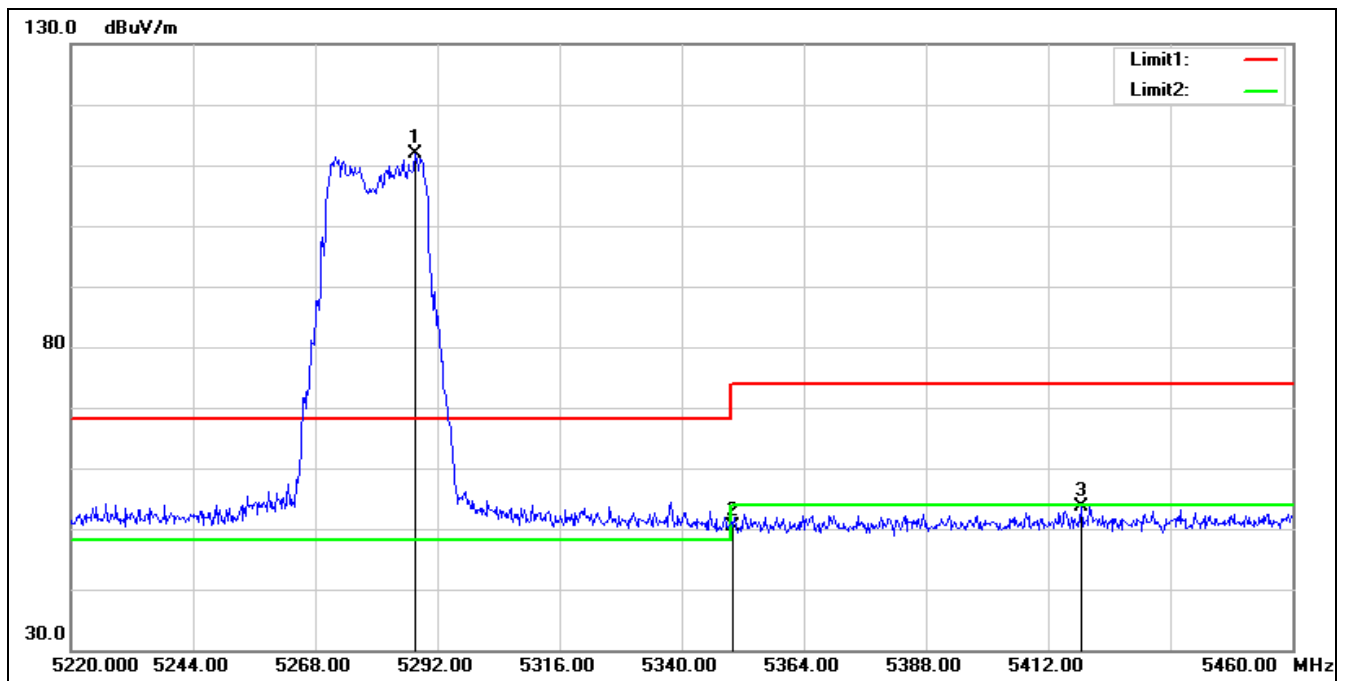

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5287.680	111.10	0.70	111.80	68.20	43.60	peak
2	5350.000	49.48	1.02	50.50	74.00	-23.50	peak
3	5418.480	52.23	1.51	53.74	74.00	-20.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5320 MHz		
Remark:			

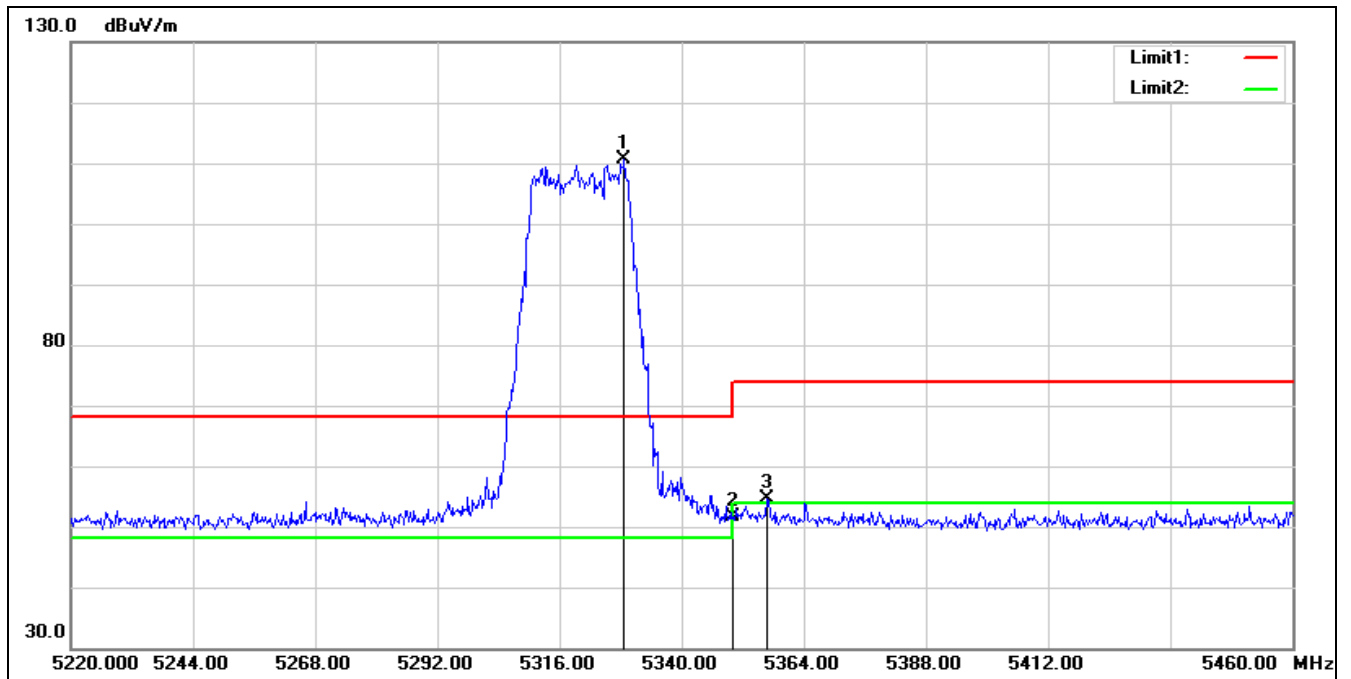


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5328.720	109.80	0.87	110.67	68.20	42.47	peak
2	5350.000	50.68	1.02	51.70	74.00	-22.30	peak
3	5356.800	53.47	1.07	54.54	74.00	-19.46	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5320 MHz

Remark:

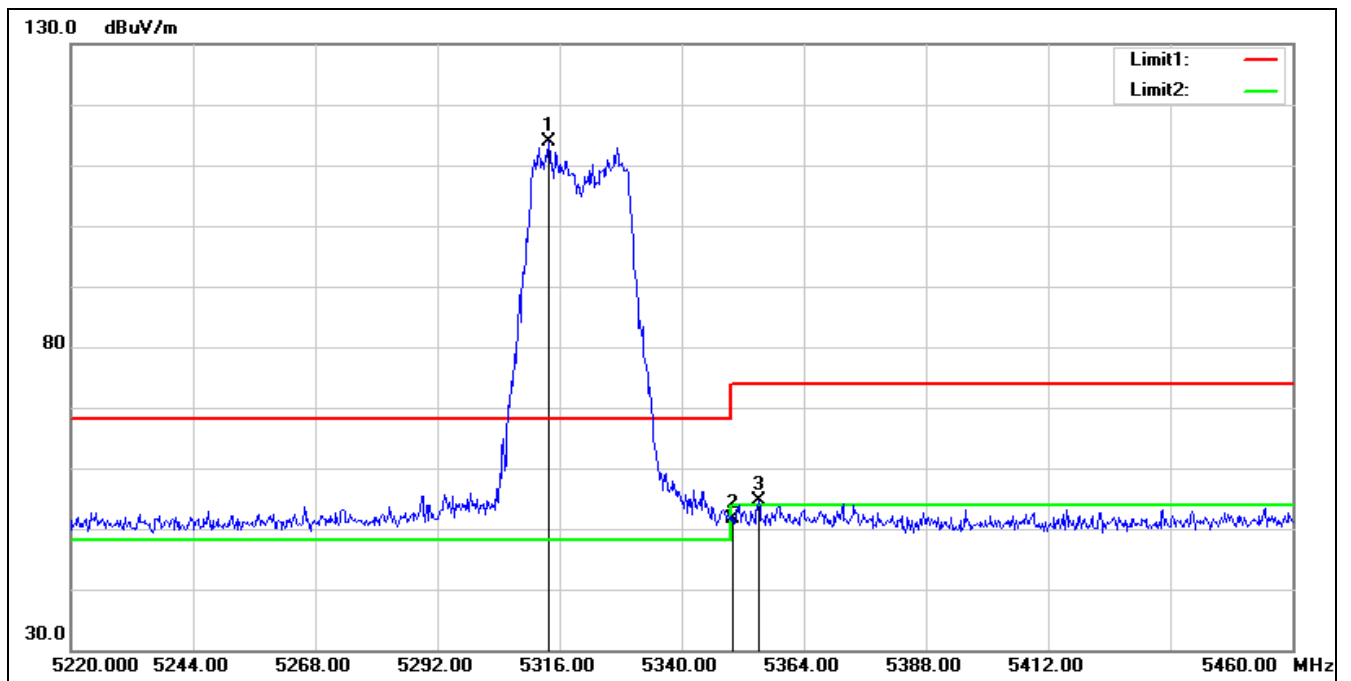


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5313.840	113.23	0.76	113.99	68.20	45.79	peak
2	5350.000	50.50	1.02	51.52	74.00	-22.48	peak
3	5355.120	53.53	1.06	54.59	74.00	-19.41	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal


Test Mode: 802.11be EHT20 5500 MHz

Remark:

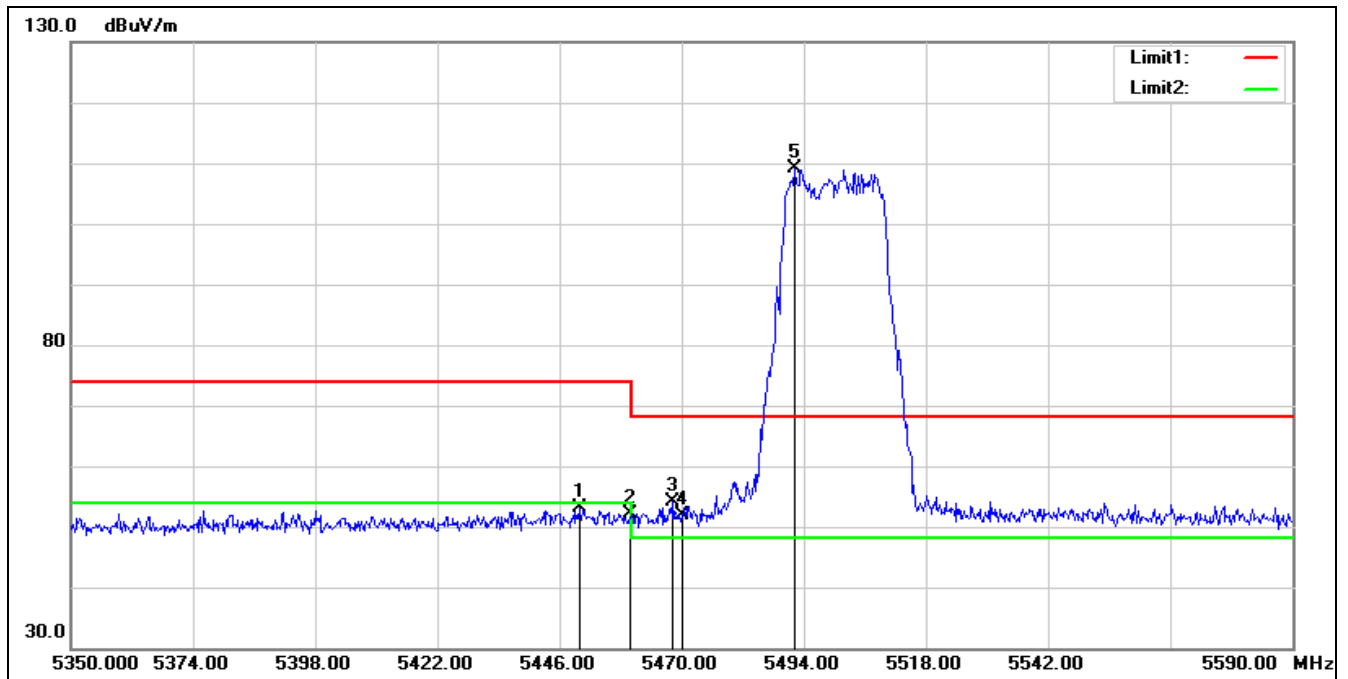

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.840	51.37	1.74	53.11	74.00	-20.89	peak
2	5460.000	50.43	1.75	52.18	74.00	-21.82	peak
3	5468.320	52.30	1.76	54.06	68.20	-14.14	peak
4	5470.000	50.13	1.77	51.90	68.20	-16.30	peak
5*	5492.080	107.29	1.79	109.08	68.20	40.88	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5500 MHz
Remark:

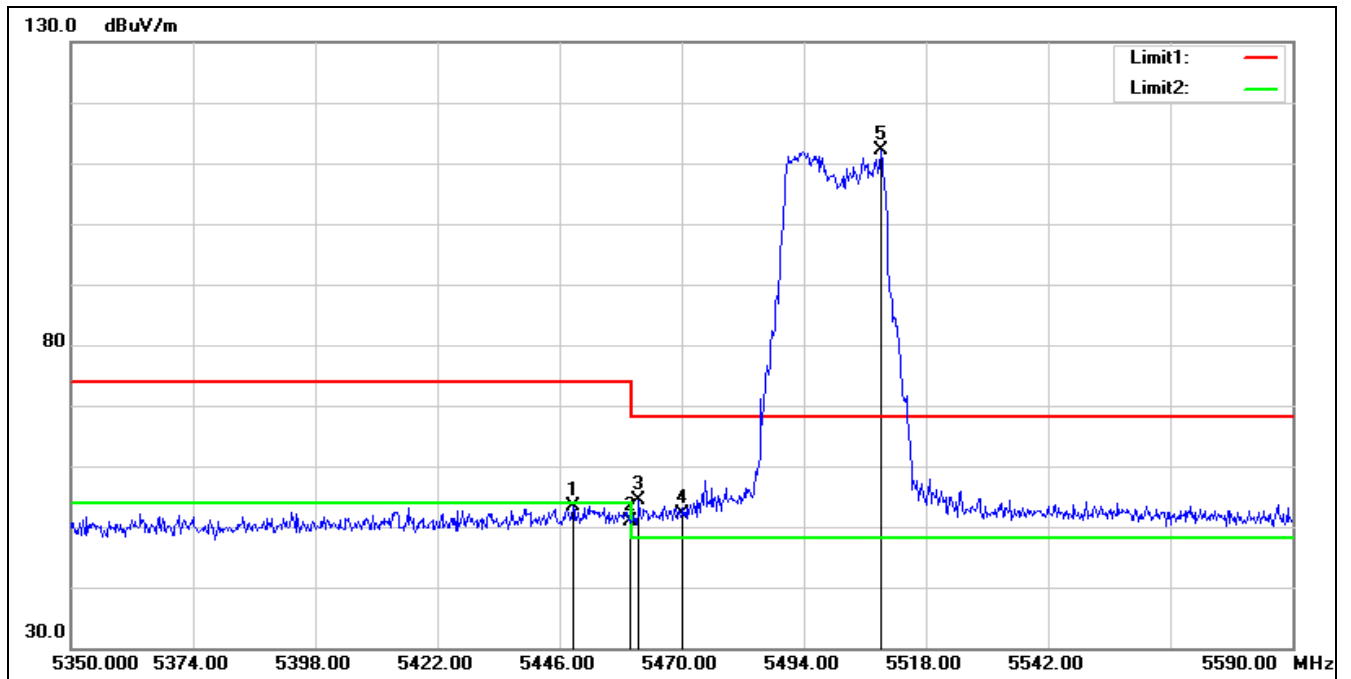


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.640	51.71	1.73	53.44	74.00	-20.56	peak
2	5460.000	49.09	1.75	50.84	74.00	-23.16	peak
3	5461.600	52.69	1.75	54.44	68.20	-13.76	peak
4	5470.000	50.33	1.77	52.10	68.20	-16.10	peak
5*	5509.120	110.38	1.80	112.18	68.20	43.98	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5560 MHz

Remark:

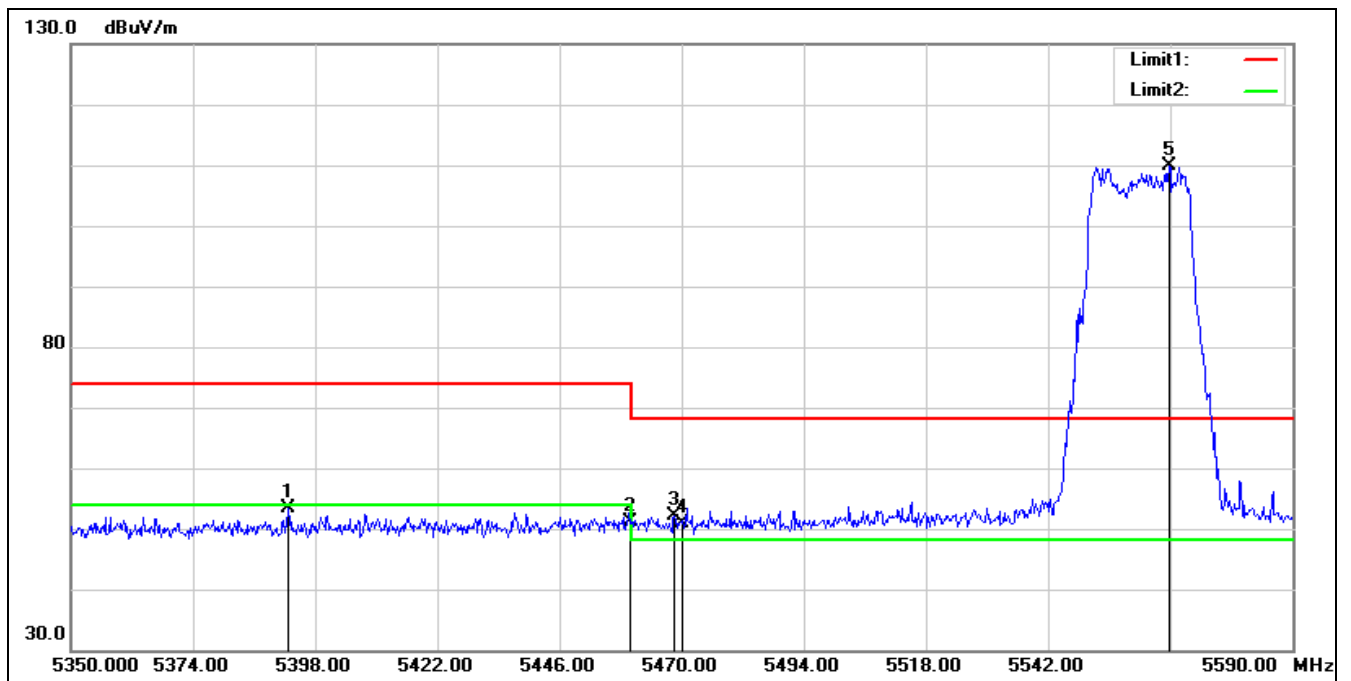


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5392.720	52.03	1.33	53.36	74.00	-20.64	peak
2	5460.000	49.28	1.75	51.03	74.00	-22.97	peak
3	5468.560	50.44	1.76	52.20	68.20	-16.00	peak
4	5470.000	49.03	1.77	50.80	68.20	-17.40	peak
5*	5565.760	108.17	1.75	109.92	68.20	41.72	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT20 5560 MHz

Remark:

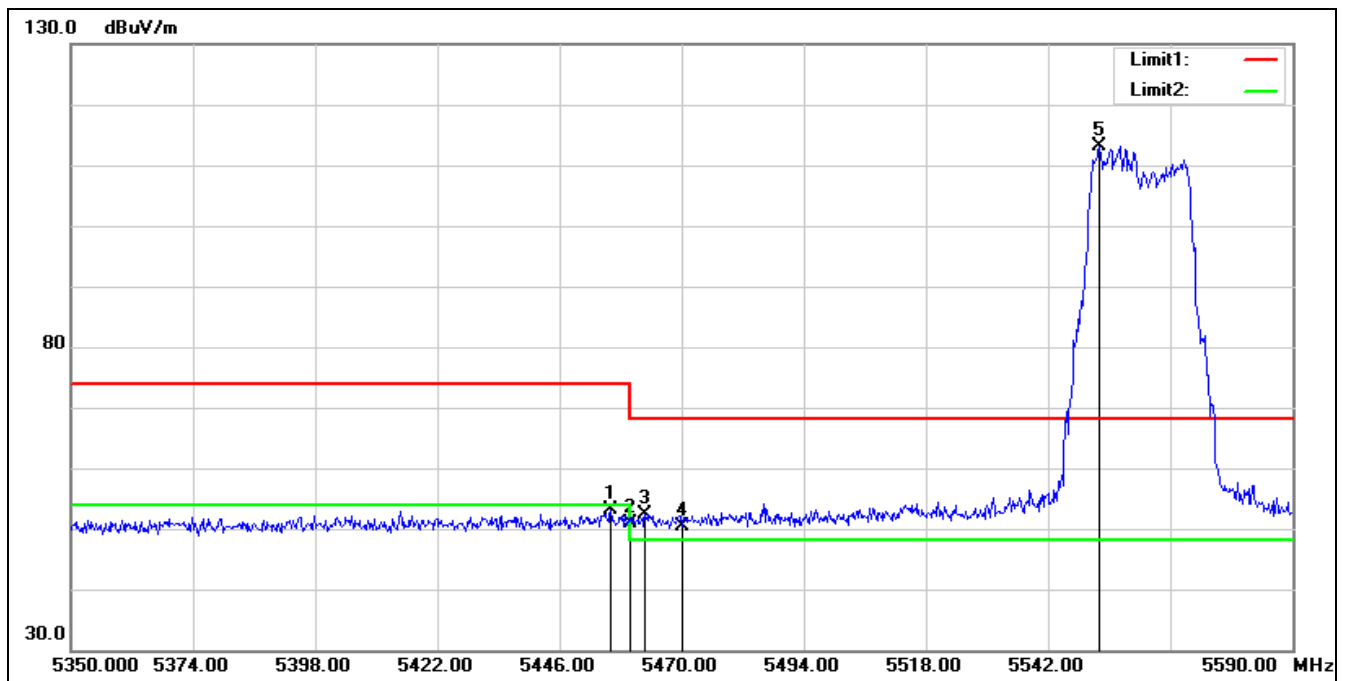


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.080	51.38	1.75	53.13	74.00	-20.87	peak
2	5460.000	49.18	1.75	50.93	74.00	-23.07	peak
3	5462.800	50.72	1.75	52.47	68.20	-15.73	peak
4	5470.000	48.69	1.77	50.46	68.20	-17.74	peak
5*	5552.080	111.34	1.79	113.13	68.20	44.93	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT20 5700 MHz

Remark:

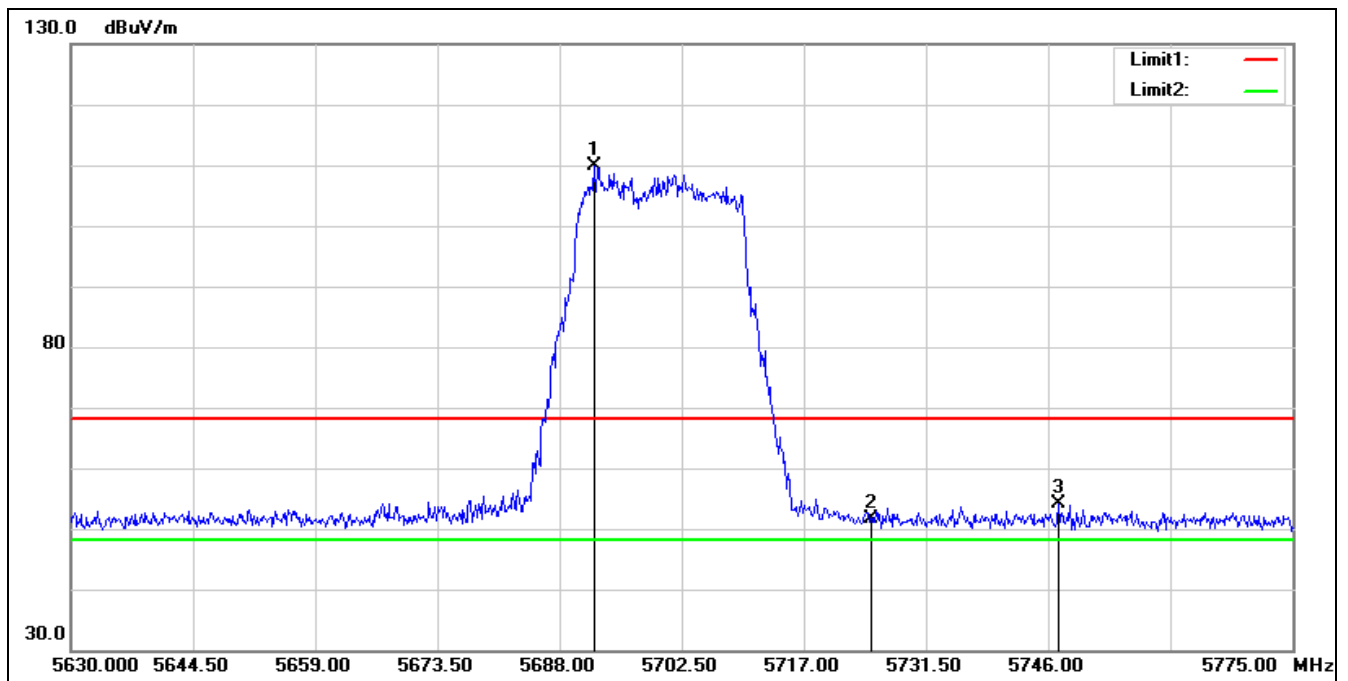


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5692.060	108.29	1.54	109.83	68.20	41.63	peak
2	5725.000	49.80	1.78	51.58	68.20	-16.62	peak
3	5747.305	52.11	2.00	54.11	68.20	-14.09	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT20 5700 MHz

Remark:

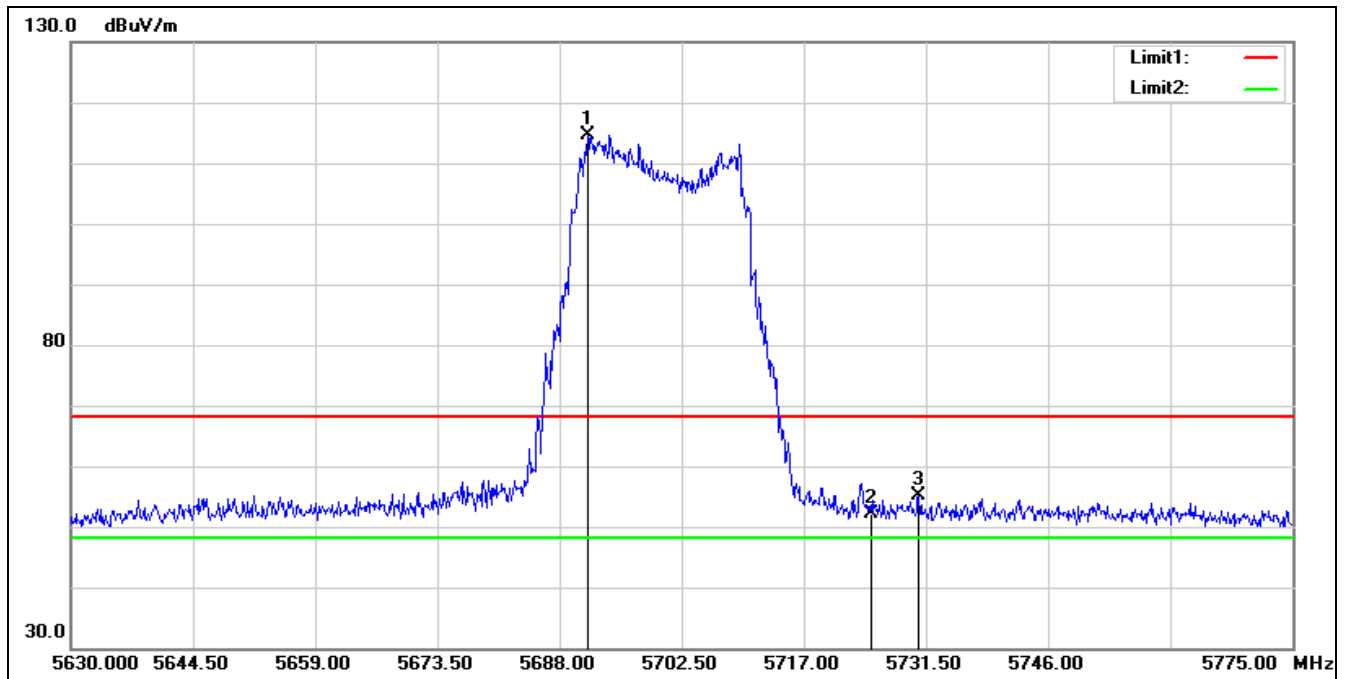

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5691.335	113.06	1.54	114.60	68.20	46.40	peak
2	5725.000	50.38	1.78	52.16	68.20	-16.04	peak
3	5730.630	53.34	1.84	55.18	68.20	-13.02	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

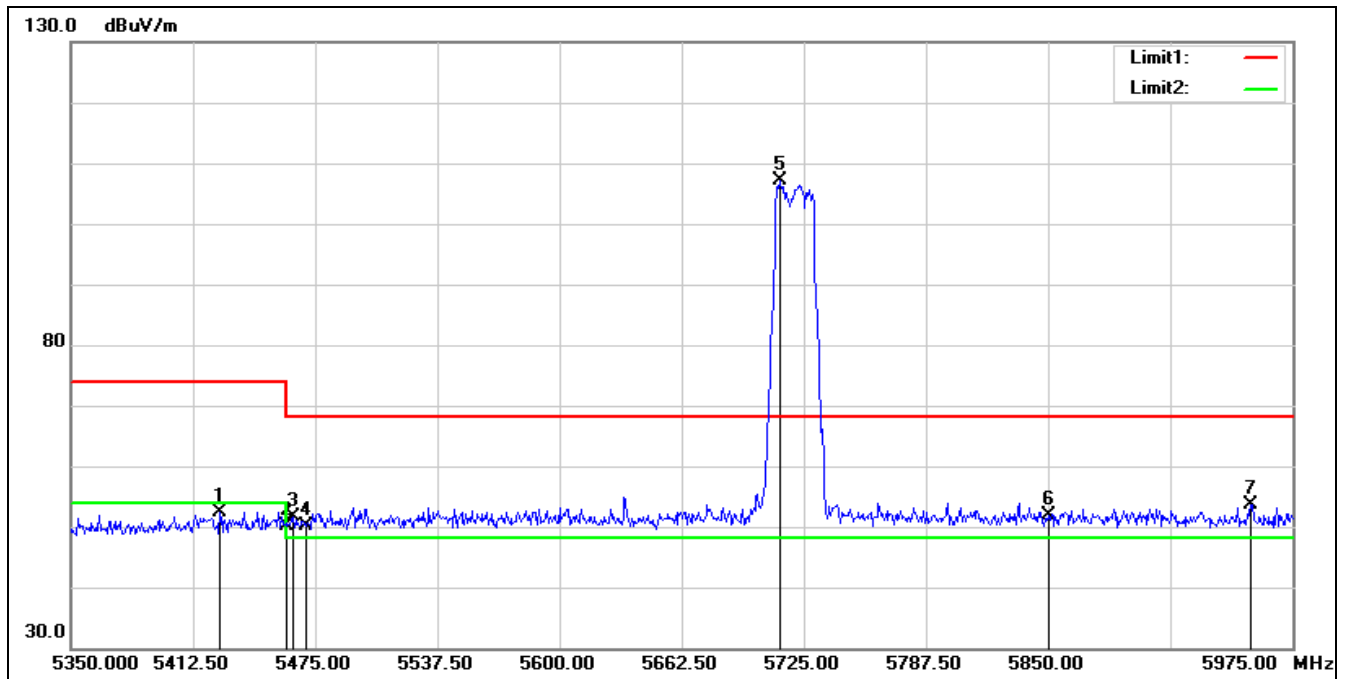

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.250	50.89	1.57	52.46	74.00	-21.54	peak
2	5460.000	48.40	1.75	50.15	74.00	-23.85	peak
3	5463.750	49.83	1.75	51.58	68.20	-16.62	peak
4	5470.000	48.48	1.77	50.25	68.20	-17.95	peak
5*	5712.500	105.41	1.65	107.06	68.20	38.86	peak
6	5850.000	49.59	2.29	51.88	68.20	-16.32	peak
7	5953.750	51.51	2.08	53.59	68.20	-14.61	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

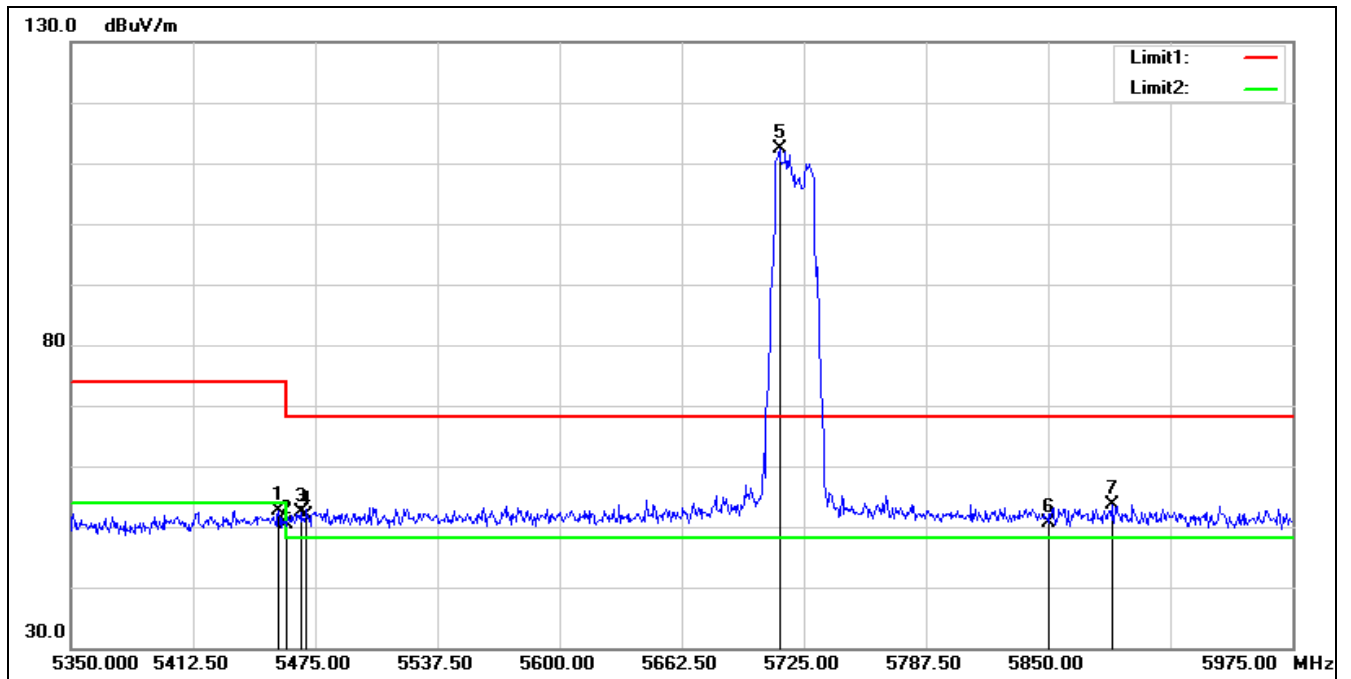

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5720 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.250	50.94	1.75	52.69	74.00	-21.31	peak
2	5460.000	48.70	1.75	50.45	74.00	-23.55	peak
3	5467.500	50.56	1.76	52.32	68.20	-15.88	peak
4	5470.000	50.15	1.77	51.92	68.20	-16.28	peak
5*	5712.500	110.77	1.65	112.42	68.20	44.22	peak
6	5850.000	48.44	2.29	50.73	68.20	-17.47	peak
7	5882.500	51.37	2.36	53.73	68.20	-14.47	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

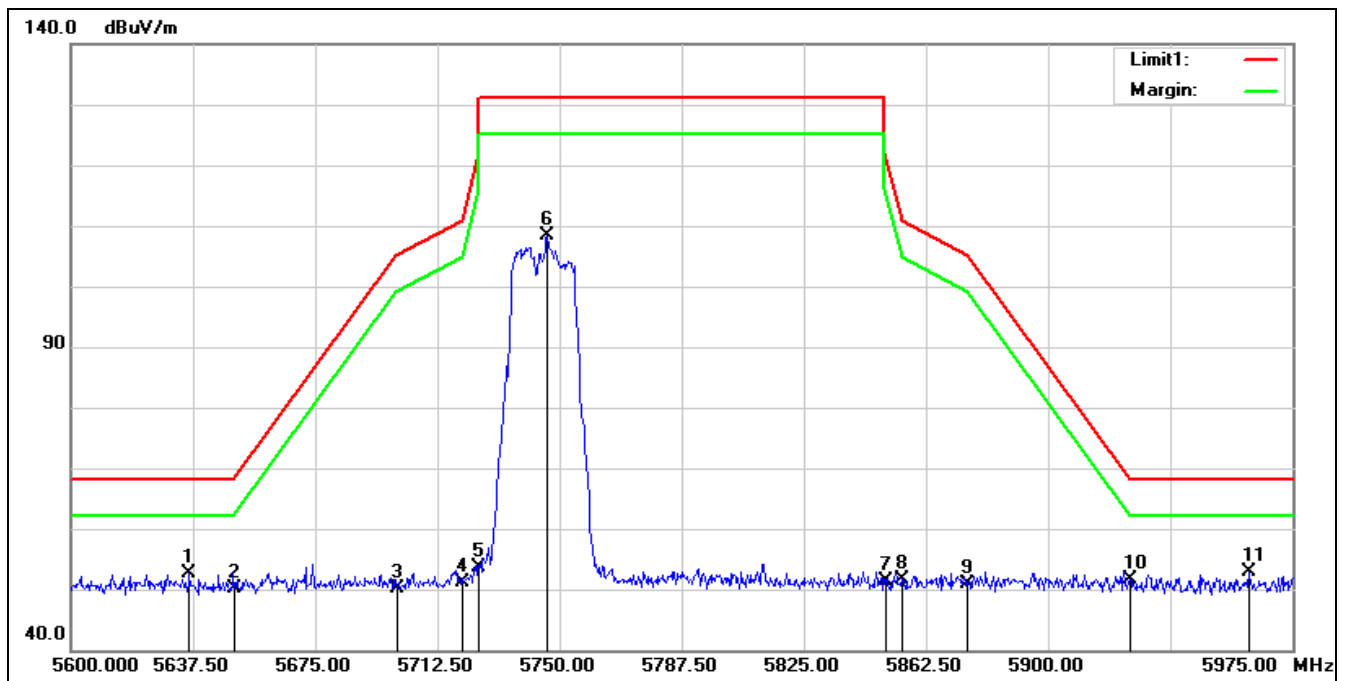

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5636.375	51.00	1.59	52.59	68.20	-15.61	peak
2	5650.000	48.60	1.56	50.16	68.20	-18.04	peak
3	5700.000	48.63	1.54	50.17	105.20	-55.03	peak
4	5720.000	49.39	1.74	51.13	110.80	-59.67	peak
5	5725.000	51.88	1.78	53.66	122.20	-68.54	peak
6	5746.250	106.42	1.99	108.41	131.20	-22.79	peak
7	5850.000	49.17	2.29	51.46	122.20	-70.74	peak
8	5855.000	49.26	2.31	51.57	110.80	-59.23	peak
9	5875.000	48.45	2.34	50.79	105.20	-54.41	peak
10	5925.000	49.33	2.23	51.56	68.20	-16.64	peak
11*	5961.500	50.91	2.08	52.99	68.20	-15.21	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

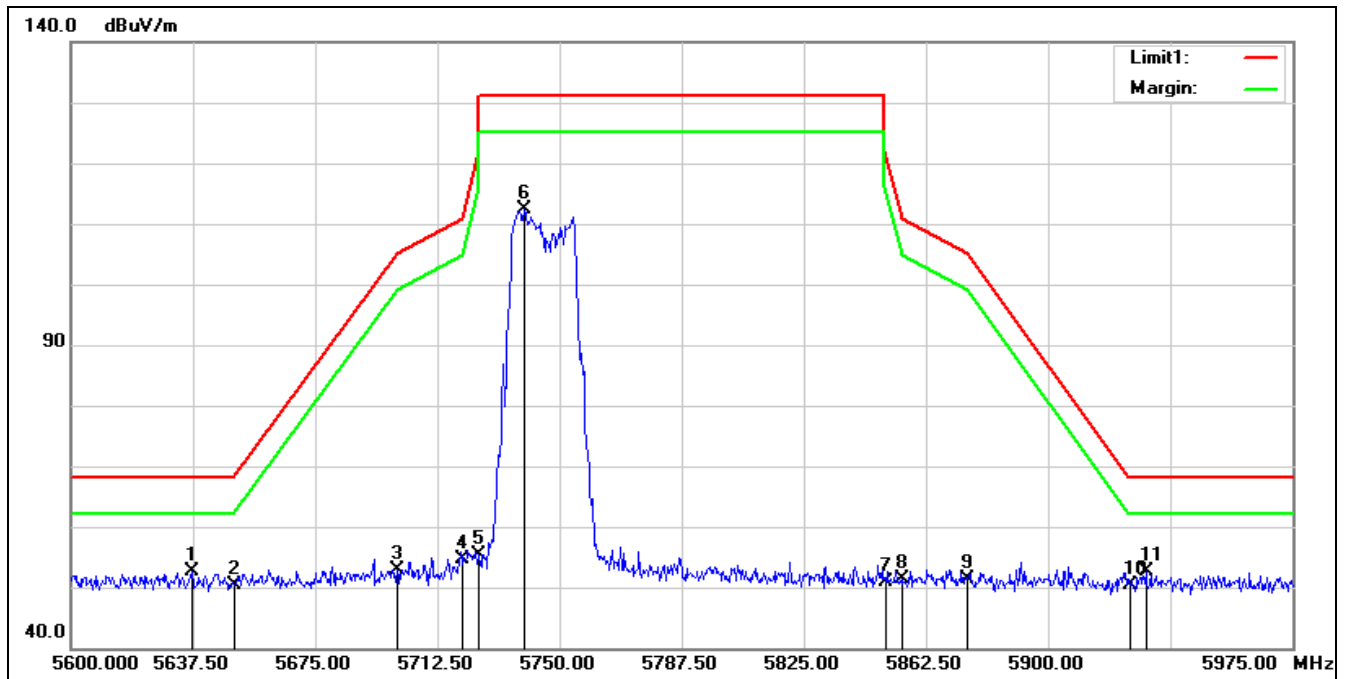

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5745 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5637.125	50.96	1.59	52.55	68.20	-15.65	peak
2	5650.000	48.90	1.56	50.46	68.20	-17.74	peak
3	5700.000	51.41	1.54	52.95	105.20	-52.25	peak
4	5720.000	52.86	1.74	54.60	110.80	-56.20	peak
5	5725.000	53.49	1.78	55.27	122.20	-66.93	peak
6	5739.125	110.38	1.92	112.30	131.20	-18.90	peak
7	5850.000	48.70	2.29	50.99	122.20	-71.21	peak
8	5855.000	49.02	2.31	51.33	110.80	-59.47	peak
9	5875.000	49.13	2.34	51.47	105.20	-53.73	peak
10	5925.000	48.15	2.23	50.38	68.20	-17.82	peak
11	5930.000	50.35	2.19	52.54	68.20	-15.66	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

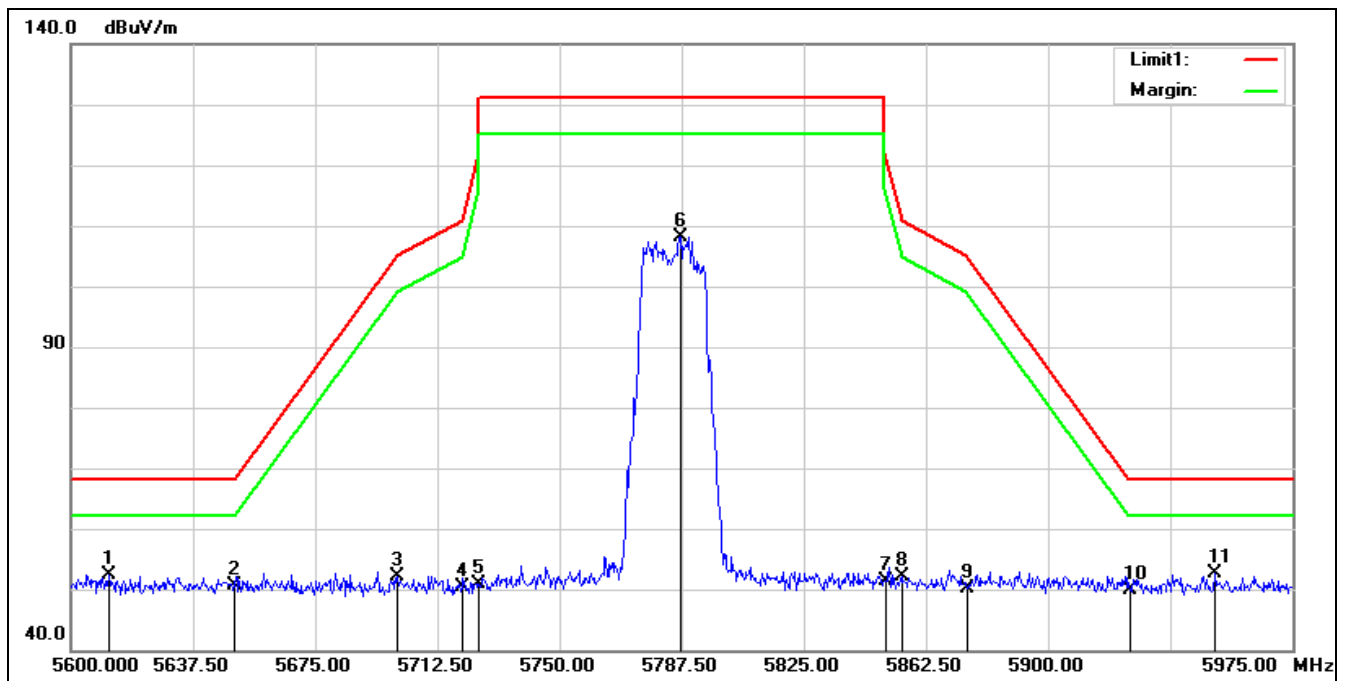

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5611.625	50.84	1.65	52.49	68.20	-15.71	peak
2	5650.000	49.09	1.56	50.65	68.20	-17.55	peak
3	5700.000	50.48	1.54	52.02	105.20	-53.18	peak
4	5720.000	48.72	1.74	50.46	110.80	-60.34	peak
5	5725.000	49.06	1.78	50.84	122.20	-71.36	peak
6	5787.125	105.96	2.17	108.13	131.20	-23.07	peak
7	5850.000	48.97	2.29	51.26	122.20	-70.94	peak
8	5855.000	49.72	2.31	52.03	110.80	-58.77	peak
9	5875.000	47.81	2.34	50.15	105.20	-55.05	peak
10	5925.000	47.54	2.23	49.77	68.20	-18.43	peak
11*	5951.375	50.58	2.06	52.64	68.20	-15.56	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

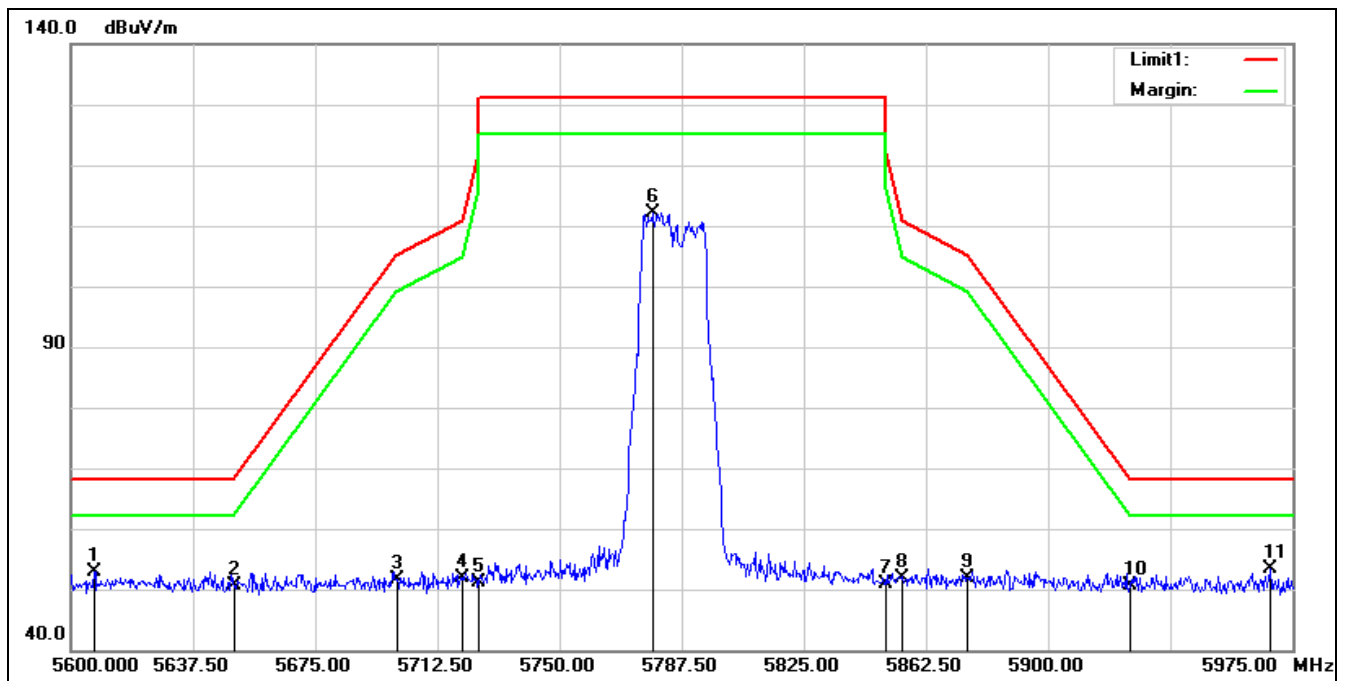

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5785 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5607.125	51.32	1.66	52.98	68.20	-15.22	peak
2	5650.000	49.10	1.56	50.66	68.20	-17.54	peak
3	5700.000	50.04	1.54	51.58	105.20	-53.62	peak
4	5720.000	50.05	1.74	51.79	110.80	-59.01	peak
5	5725.000	49.46	1.78	51.24	122.20	-70.96	peak
6	5778.500	110.08	2.13	112.21	131.20	-18.99	peak
7	5850.000	48.56	2.29	50.85	122.20	-71.35	peak
8	5855.000	49.45	2.31	51.76	110.80	-59.04	peak
9	5875.000	49.66	2.34	52.00	105.20	-53.20	peak
10	5925.000	48.35	2.23	50.58	68.20	-17.62	peak
11*	5968.250	51.38	2.10	53.48	68.20	-14.72	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

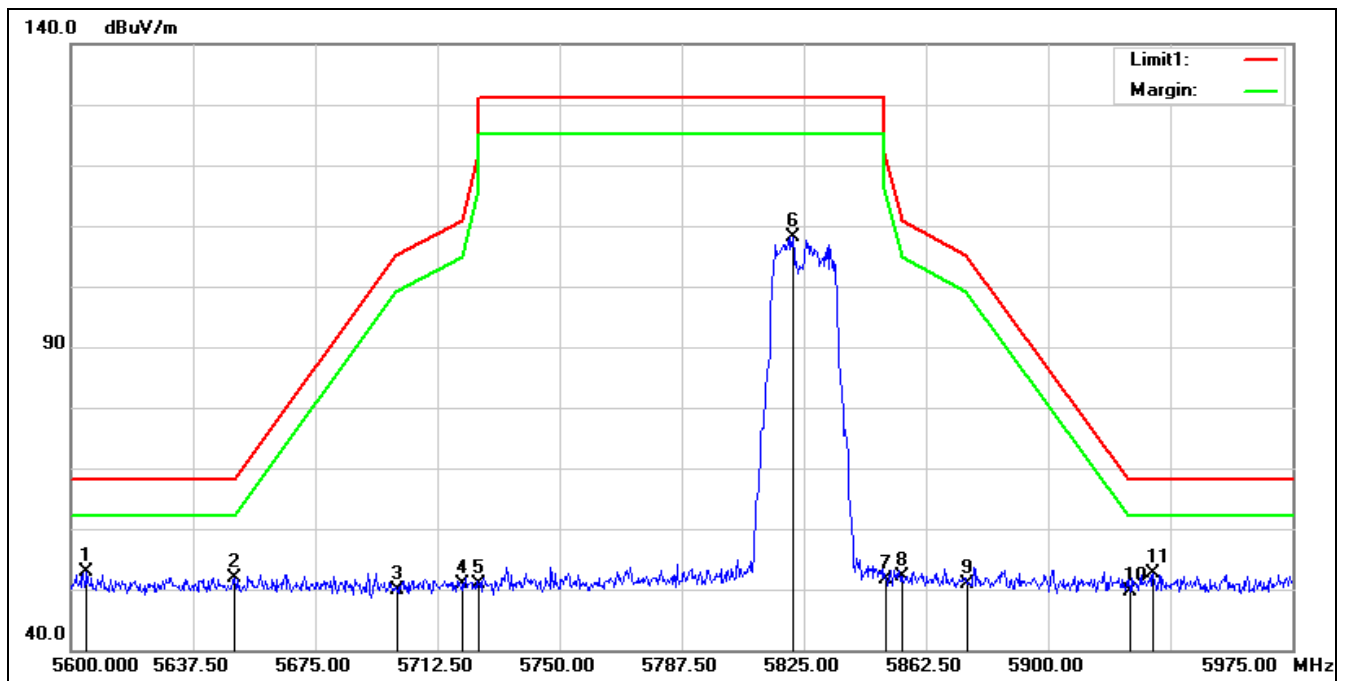

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5604.875	51.32	1.66	52.98	68.20	-15.22	peak
2	5650.000	50.20	1.56	51.76	68.20	-16.44	peak
3	5700.000	48.30	1.54	49.84	105.20	-55.36	peak
4	5720.000	49.10	1.74	50.84	110.80	-59.96	peak
5	5725.000	49.18	1.78	50.96	122.20	-71.24	peak
6	5821.625	105.83	2.24	108.07	131.20	-23.13	peak
7	5850.000	49.31	2.29	51.60	122.20	-70.60	peak
8	5855.000	49.85	2.31	52.16	110.80	-58.64	peak
9	5875.000	48.64	2.34	50.98	105.20	-54.22	peak
10	5925.000	47.52	2.23	49.75	68.20	-18.45	peak
11	5932.250	50.41	2.18	52.59	68.20	-15.61	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

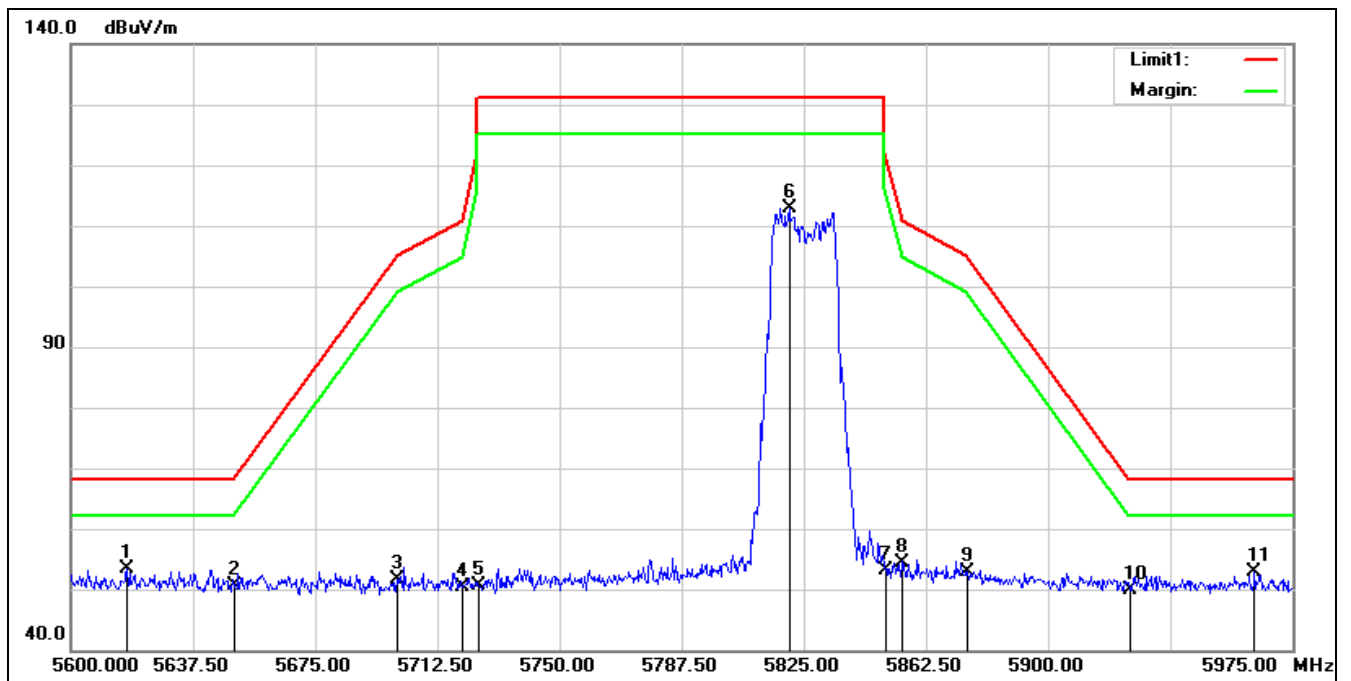

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5825 MHz		
Remark:			

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5617.250	51.63	1.63	53.26	68.20	-14.94	peak
2	5650.000	48.97	1.56	50.53	68.20	-17.67	peak
3	5700.000	50.17	1.54	51.71	105.20	-53.49	peak
4	5720.000	48.52	1.74	50.26	110.80	-60.54	peak
5	5725.000	48.91	1.78	50.69	122.20	-71.51	peak
6	5820.500	110.68	2.24	112.92	131.20	-18.28	peak
7	5850.000	50.96	2.29	53.25	122.20	-68.95	peak
8	5855.000	51.98	2.31	54.29	110.80	-56.51	peak
9	5875.000	50.45	2.34	52.79	105.20	-52.41	peak
10	5925.000	47.66	2.23	49.89	68.20	-18.31	peak
11	5963.375	50.79	2.09	52.88	68.20	-15.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5190 MHz		
Remark:			

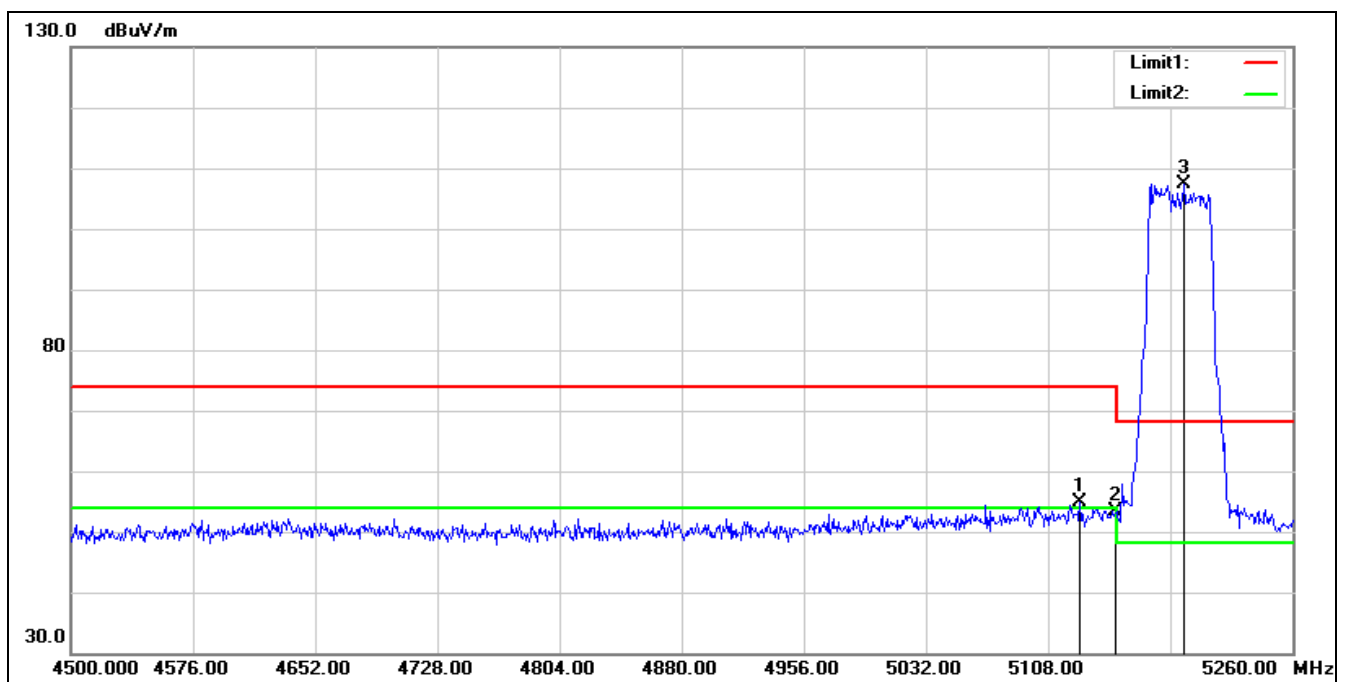


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5127.760	53.55	1.39	54.94	74.00	-19.06	peak
2	5150.000	52.01	1.38	53.39	74.00	-20.61	peak
3*	5192.360	106.30	1.18	107.48	68.20	39.28	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5190 MHz

Remark:

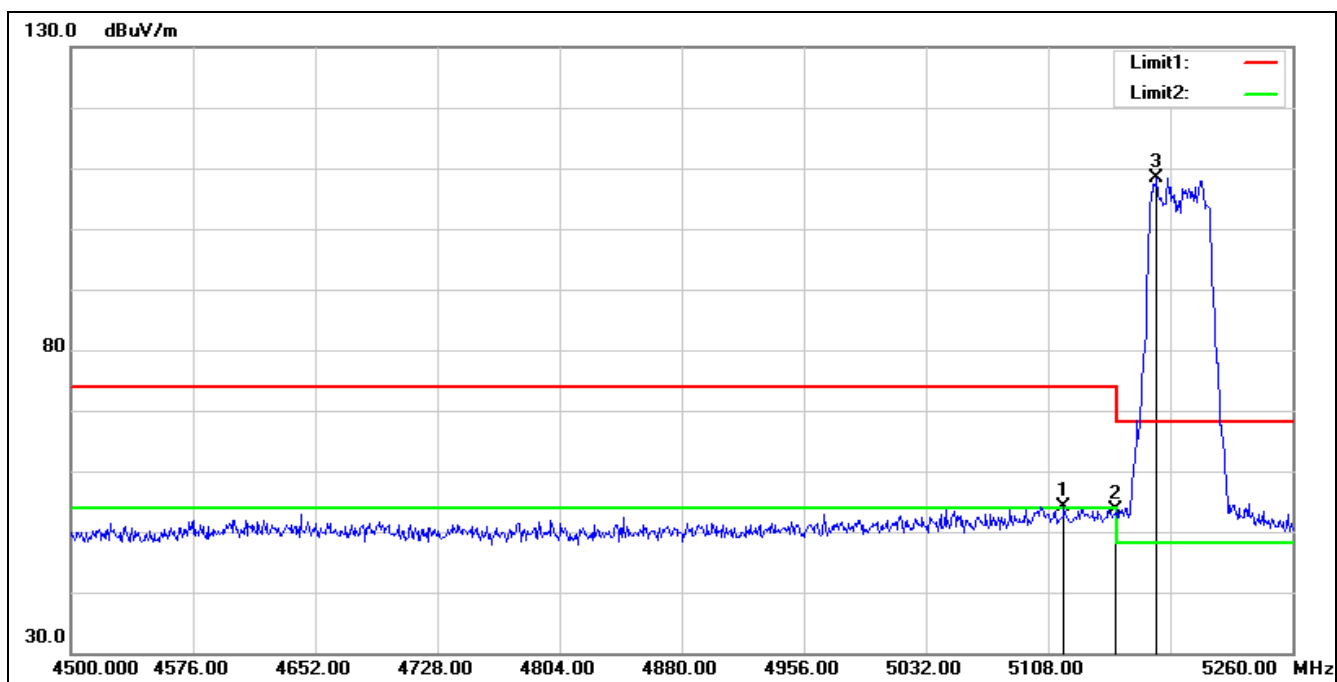

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5117.880	52.74	1.40	54.14	74.00	-19.86	peak
2	5150.000	52.32	1.38	53.70	74.00	-20.30	peak
3*	5175.640	107.19	1.26	108.45	68.20	40.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5230 MHz		
Remark:			

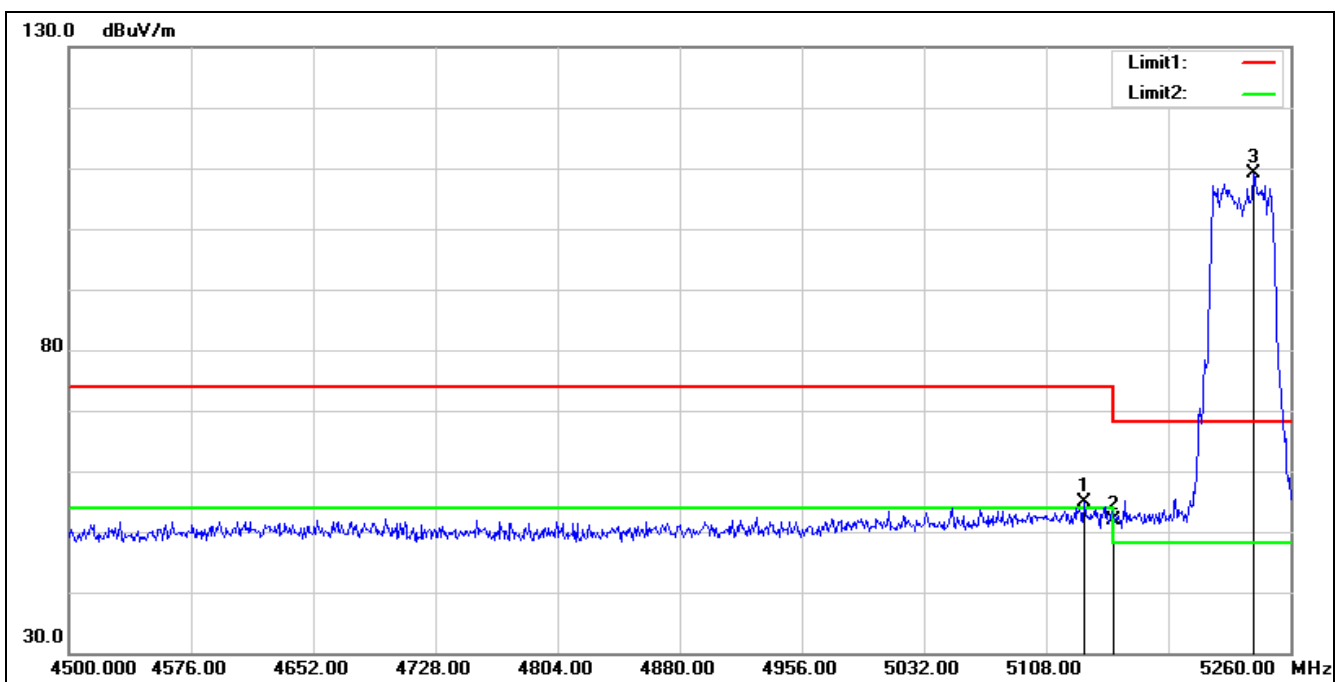


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5131.560	53.37	1.39	54.76	74.00	-19.24	peak
2	5150.000	50.39	1.38	51.77	74.00	-22.23	peak
3*	5237.200	108.31	0.88	109.19	68.20	40.99	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5230 MHz

Remark:

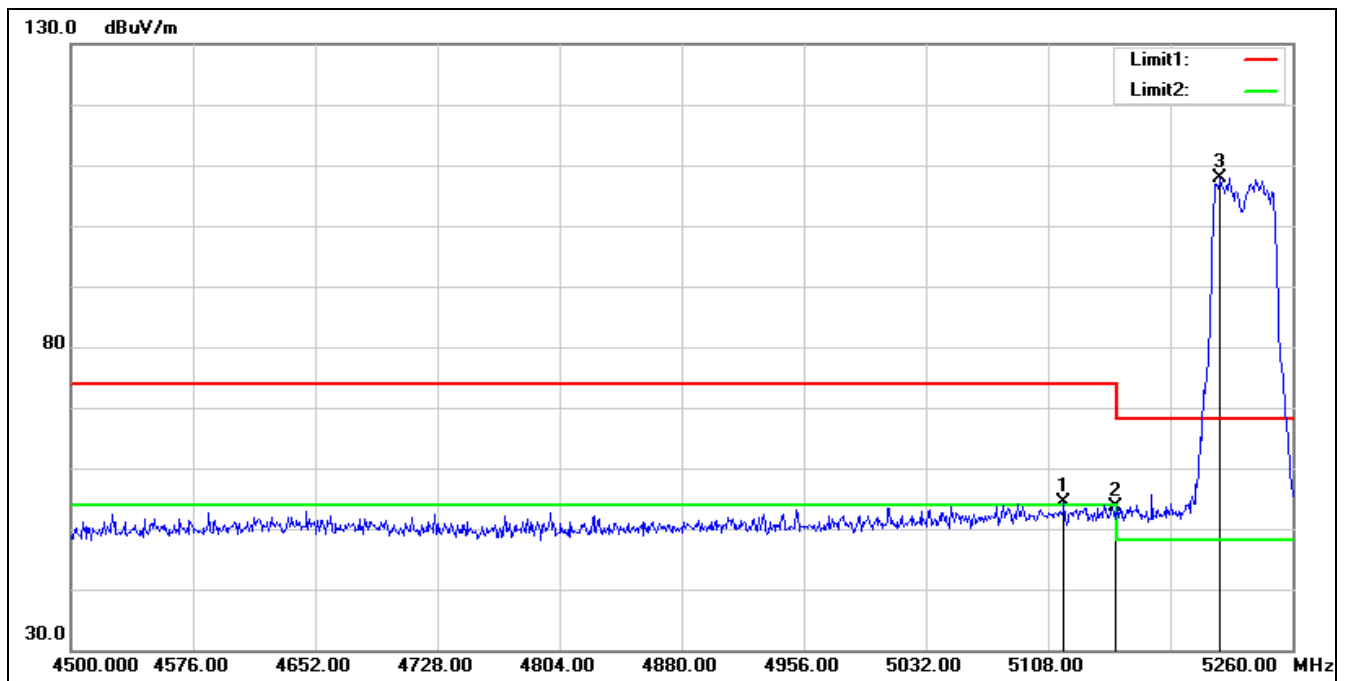

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5117.880	52.90	1.40	54.30	74.00	-19.70	peak
2	5150.000	52.16	1.38	53.54	74.00	-20.46	peak
3*	5215.160	106.93	1.03	107.96	68.20	39.76	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5270 MHz
Remark:

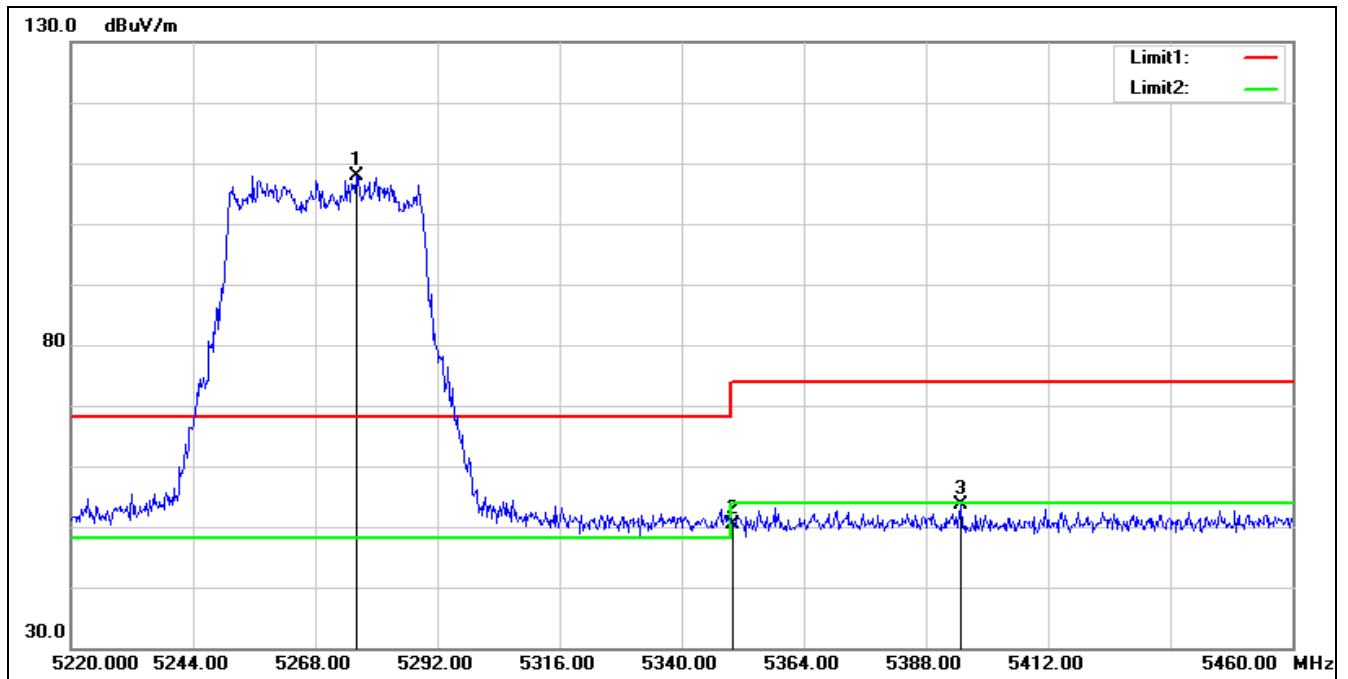


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5276.160	107.13	0.73	107.86	68.20	39.66	peak
2	5350.000	49.28	1.02	50.30	74.00	-23.70	peak
3	5394.960	52.20	1.34	53.54	74.00	-20.46	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5270 MHz

Remark:

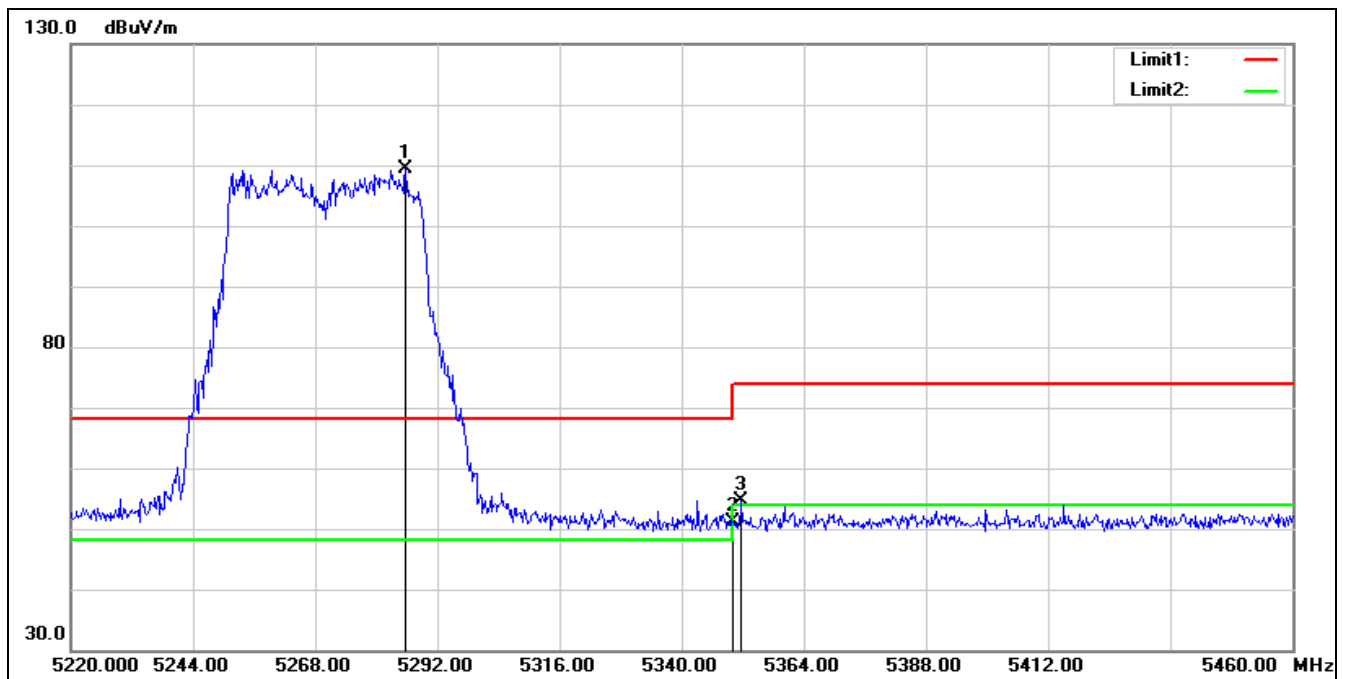


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5285.760	108.57	0.71	109.28	68.20	41.08	peak
2	5350.000	50.14	1.02	51.16	74.00	-22.84	peak
3	5351.760	53.66	1.03	54.69	74.00	-19.31	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5310 MHz

Remark:

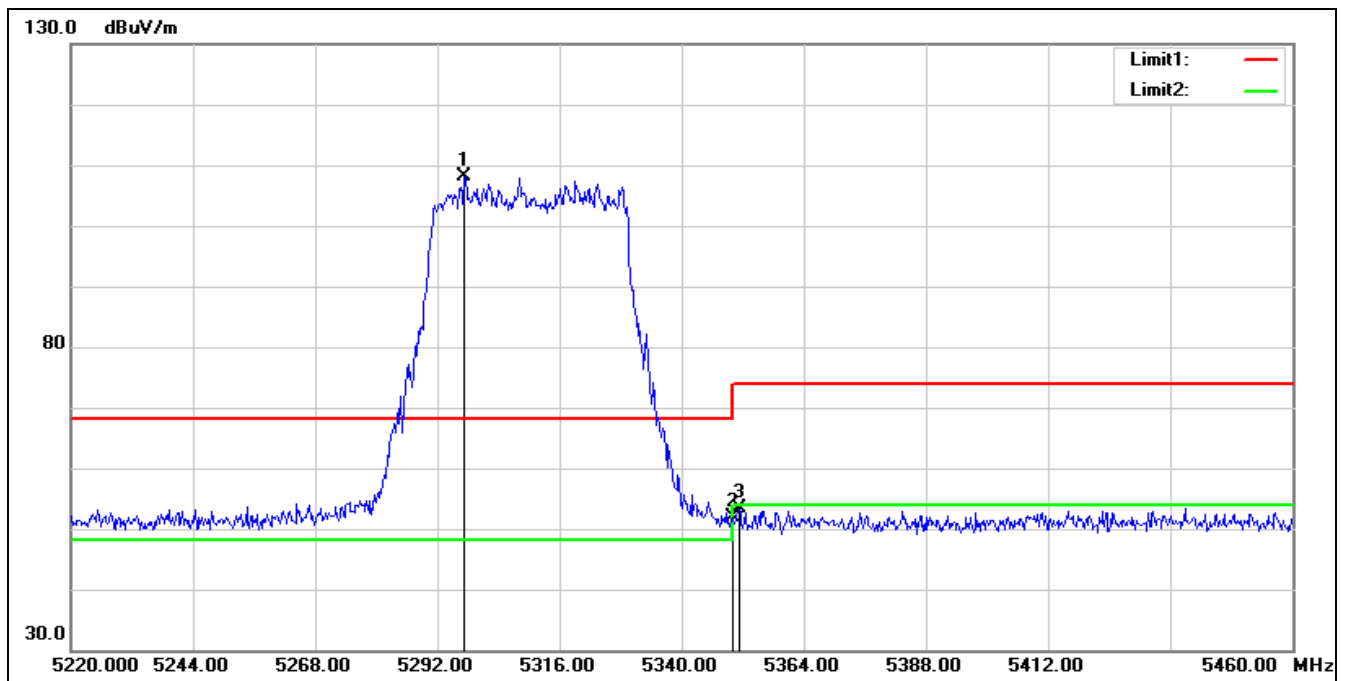


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5297.280	107.59	0.66	108.25	68.20	40.05	peak
2	5350.000	50.84	1.02	51.86	74.00	-22.14	peak
3	5351.280	52.35	1.03	53.38	74.00	-20.62	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical


Test Mode: 802.11be EHT40 5310 MHz

Remark:

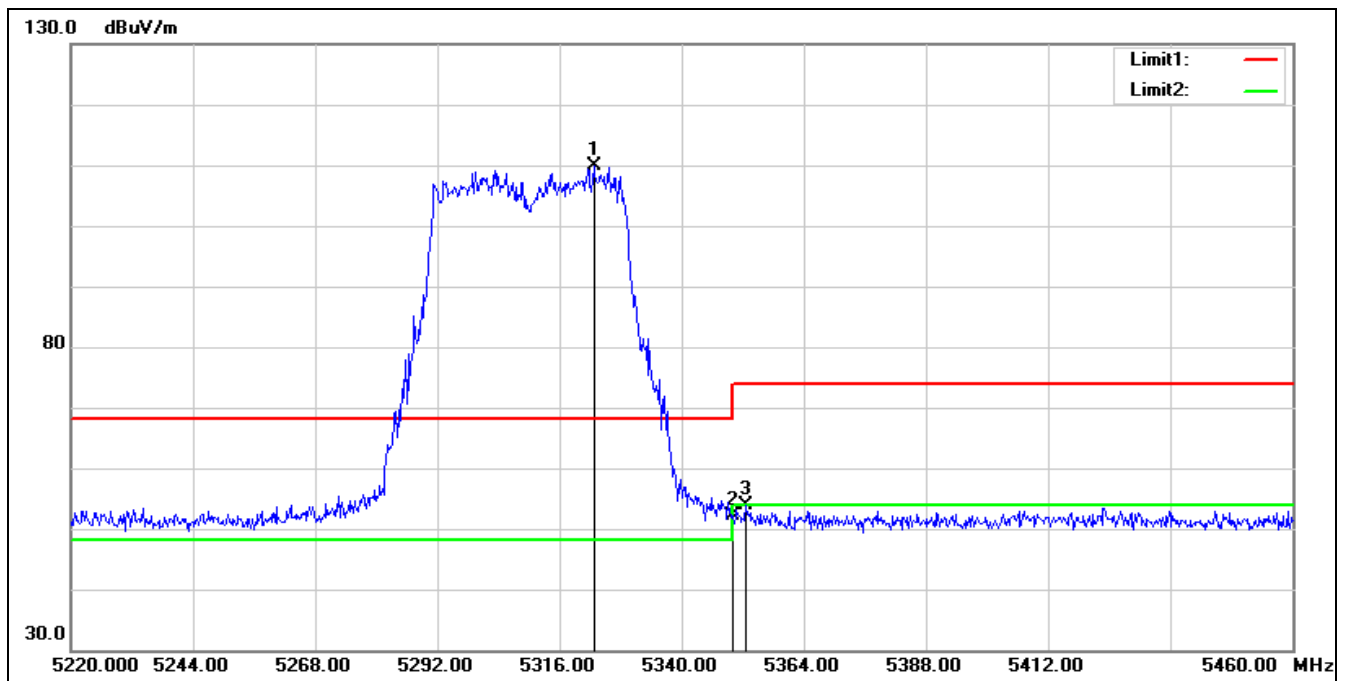


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5322.720	109.11	0.82	109.93	68.20	41.73	peak
2	5350.000	51.13	1.02	52.15	74.00	-21.85	peak
3	5352.480	52.88	1.03	53.91	74.00	-20.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5510 MHz		
Remark:			

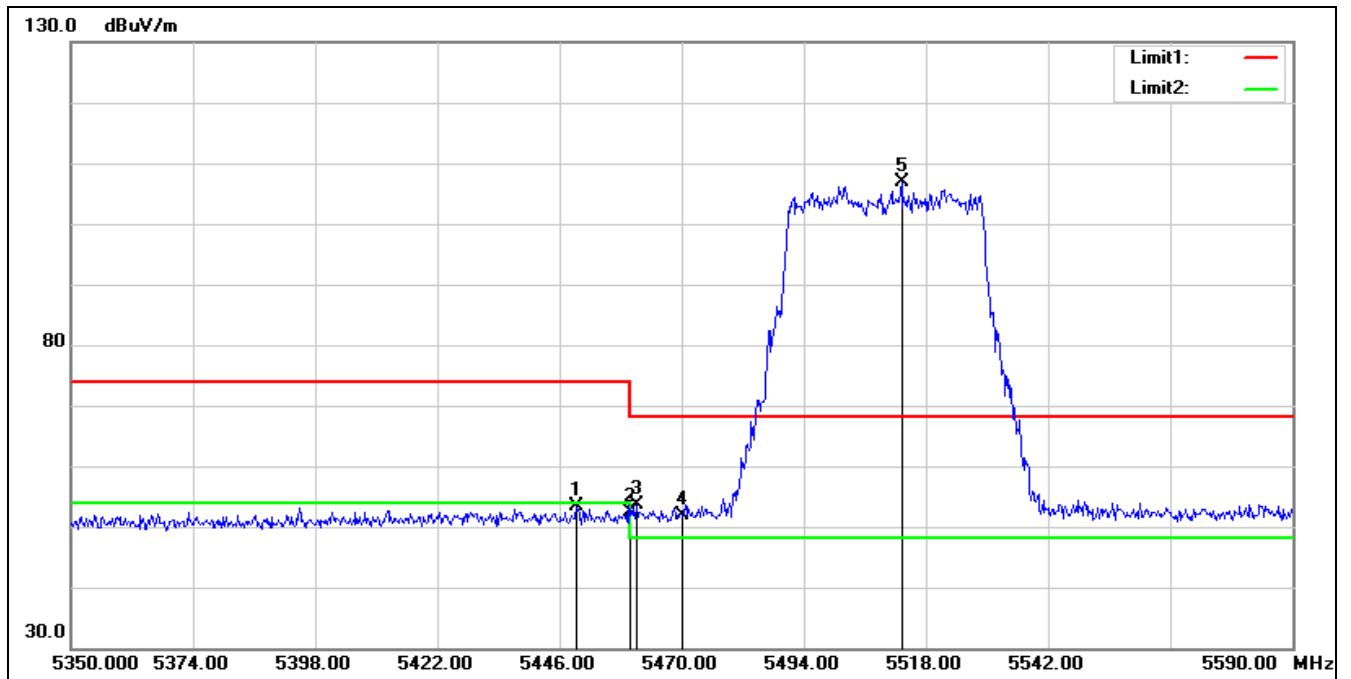

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.360	51.55	1.74	53.29	74.00	-20.71	peak
2	5460.000	50.70	1.75	52.45	74.00	-21.55	peak
3	5461.120	51.91	1.75	53.66	68.20	-14.54	peak
4	5470.000	50.08	1.77	51.85	68.20	-16.35	peak
5*	5513.200	105.19	1.80	106.99	68.20	38.79	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 5510 MHz
Remark:

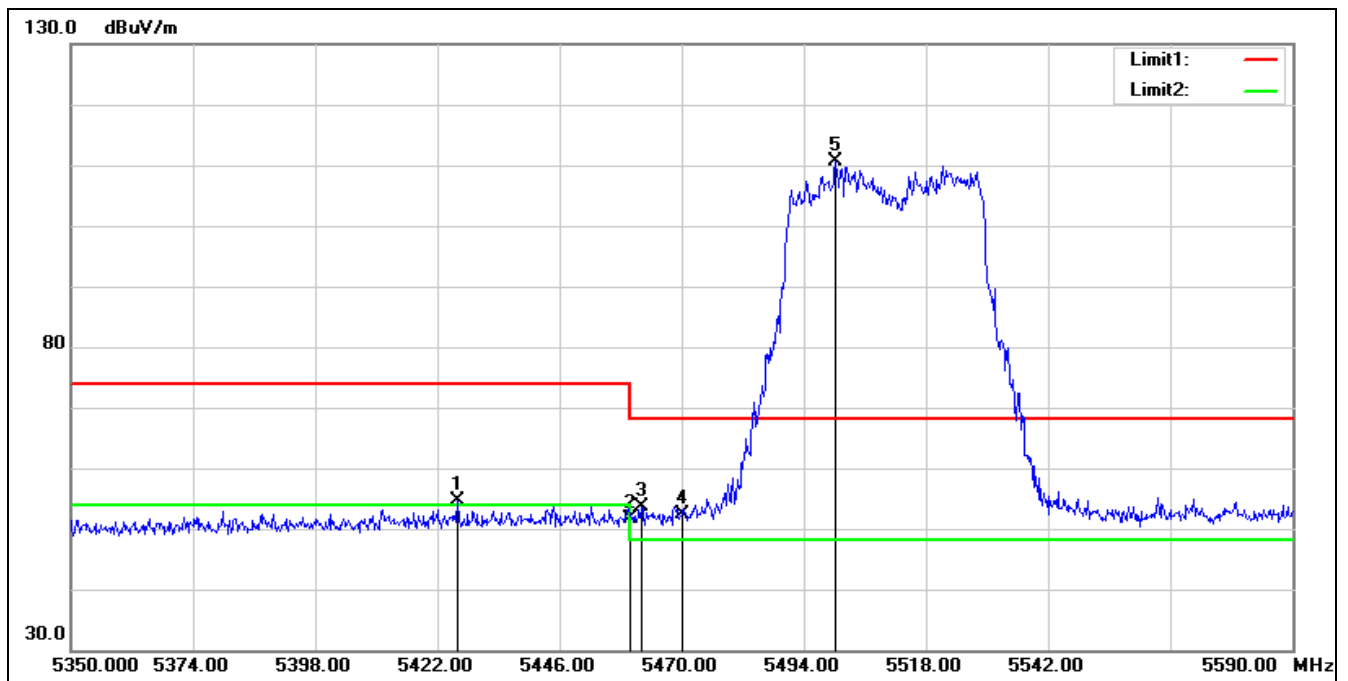


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5425.840	53.11	1.57	54.68	74.00	-19.32	peak
2	5460.000	49.81	1.75	51.56	74.00	-22.44	peak
3	5462.080	51.98	1.75	53.73	68.20	-14.47	peak
4	5470.000	50.53	1.77	52.30	68.20	-15.90	peak
5*	5500.240	108.81	1.80	110.61	68.20	42.41	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Horizontal

Test Mode: 802.11be EHT40 5550 MHz

Remark:

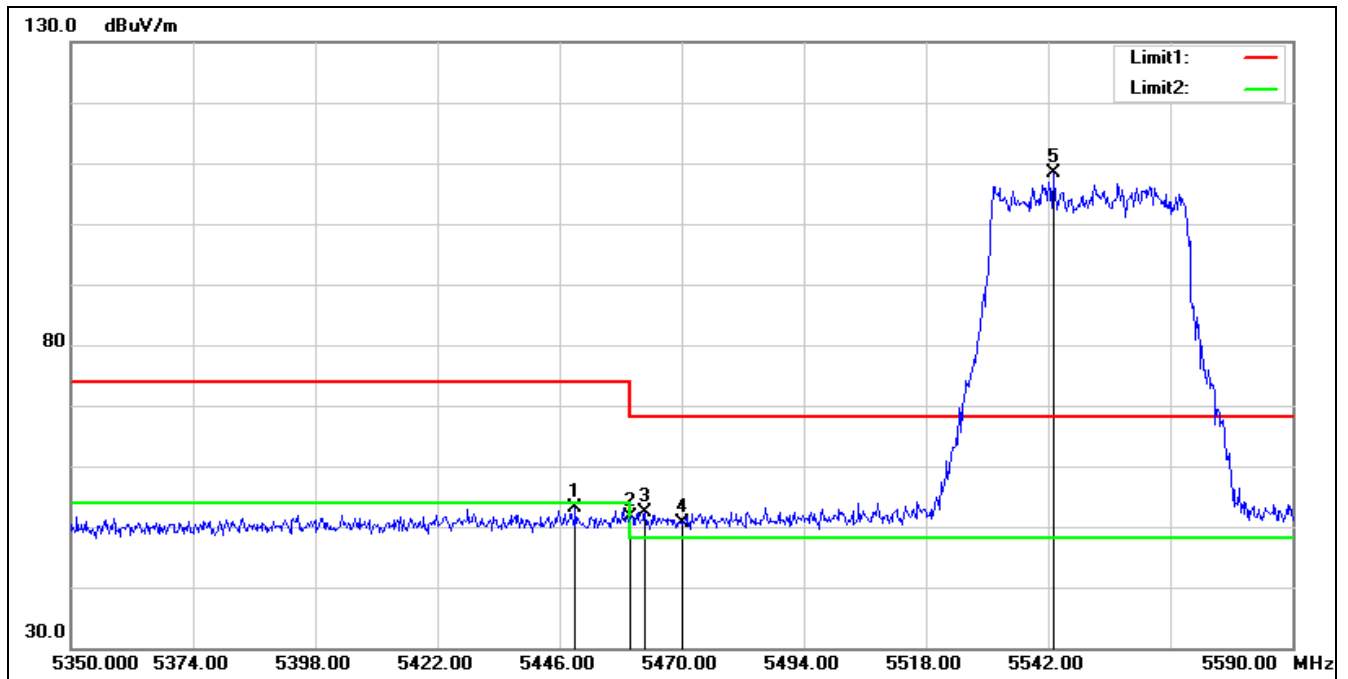


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5449.120	51.48	1.73	53.21	74.00	-20.79	peak
2	5460.000	49.81	1.75	51.56	74.00	-22.44	peak
3	5462.800	50.74	1.75	52.49	68.20	-15.71	peak
4	5470.000	48.75	1.77	50.52	68.20	-17.68	peak
5*	5542.960	106.58	1.79	108.37	68.20	40.17	peak

Standard: Part 15E Test Site: 966 Chamber

Polarization: Vertical

Test Mode: 802.11be EHT40 5550 MHz

Remark:

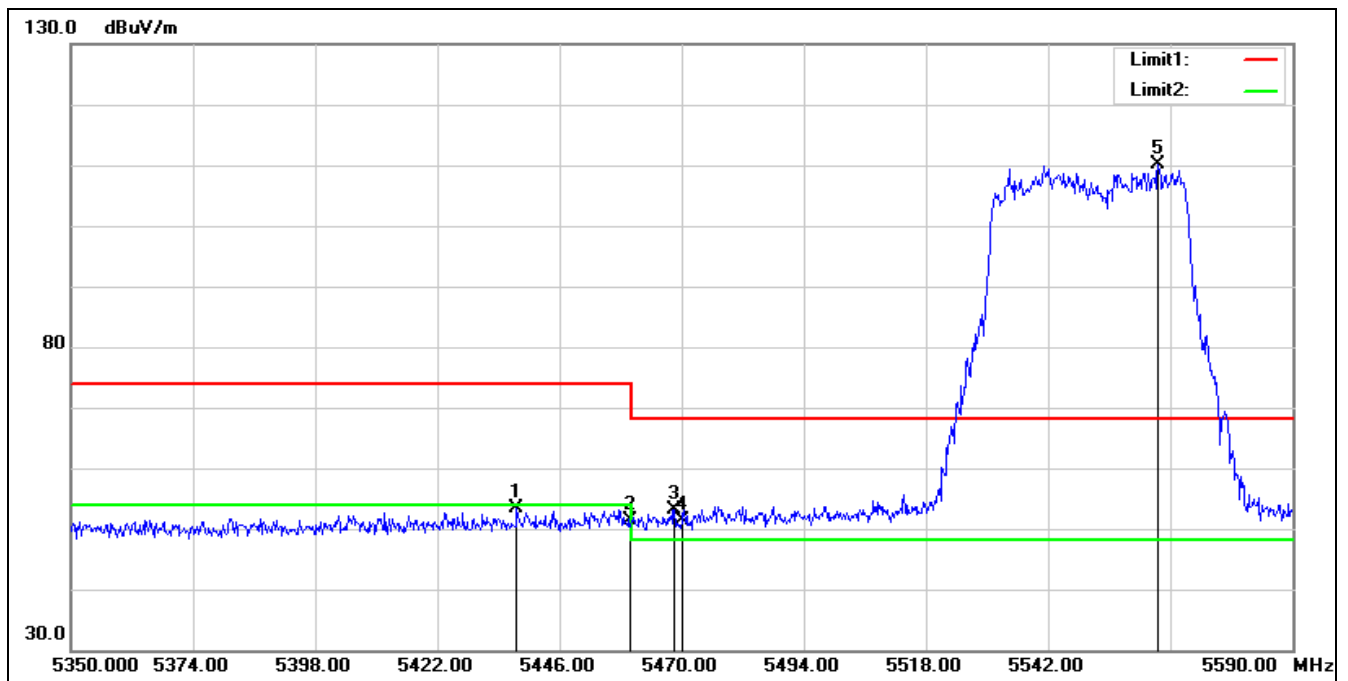

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5437.600	51.83	1.66	53.49	74.00	-20.51	peak
2	5460.000	49.63	1.75	51.38	74.00	-22.62	peak
3	5468.560	51.39	1.76	53.15	68.20	-15.05	peak
4	5470.000	49.51	1.77	51.28	68.20	-16.92	peak
5*	5563.600	108.30	1.76	110.06	68.20	41.86	peak