


FCC SAR TEST REPORT

FCC ID : PU5-TP00111AUC
Equipment : Notebook Computer
Brand Name : Lenovo
Model Name : TP00111A
Applicant : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei
City 221, Taiwan
Manufacturer : Wistron Corporation
21F, No. 88, Sec. 1, Hsin Tai Wu Rd., Hsichih Dist, New Taipei
City 221, Taiwan
Standard : FCC 47 CFR Part 2 (2.1093)

Equipment: Foxconn T99W175 tested inside of Lenovo Notebook Computer

The product was received on Sep. 29, 2020 and testing was started from Oct. 11, 2020 and completed on Oct. 22, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	5
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	7
3.3 General 5G NR SAR Test and Reporting Considerations	10
4. Proximity Sensor Triggering Test.....	12
5. RF Exposure Limits.....	22
5.1 Uncontrolled Environment.....	22
5.2 Controlled Environment.....	22
6. Specific Absorption Rate (SAR).....	23
6.1 Introduction	23
6.2 SAR Definition.....	23
7. System Description and Setup	24
7.1 Test Site Location.....	24
7.2 E-Field Probe	25
7.3 Data Acquisition Electronics (DAE)	25
7.4 Phantom.....	26
7.5 Device Holder.....	27
8. Measurement Procedures	28
8.1 Spatial Peak SAR Evaluation.....	28
8.2 Power Reference Measurement.....	29
8.3 Area Scan	29
8.4 Zoom Scan.....	30
8.5 Volume Scan Procedures.....	30
8.6 Power Drift Monitoring.....	30
9. Test Equipment List.....	31
10. System Verification	32
10.1 Tissue Simulating Liquids.....	32
10.2 Tissue Verification	33
10.3 System Performance Check Results.....	34
11. RF Exposure Positions	34
11.1 SAR Testing for Tablet	34
12. UMTS/LTE Output Power (Unit: dBm)	35
13. 5G NR Output Power (Unit: dBm)	141
14. SAR Test Results	162
14.1 Body SAR	164
14.2 Repeated SAR Measurement	174
14.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity	174
15. Simultaneous Transmission Analysis	175
15.1 Body Exposure Conditions	176
15.2 SPLSR Evaluation and Analysis.....	181
16. Uncertainty Assessment	215
17. References.....	215
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Antenna Location & Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA092423	01	Initial issue of report	Dec. 16, 2020

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Wistron Corporation, Notebook Computer, TP00111A, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
			Body		
			1g SAR (W/kg)		
Licensed	WCDMA	WCDMA II	1.11		1.58
		WCDMA IV	1.19		
		WCDMA V	1.09		
	LTE	LTE Band 2	0.69		
		LTE Band 5	1.14		
		LTE Band 7	1.14		
		LTE Band 12 / 17	1.09		
		LTE Band 13	1.17		
		LTE Band 14	1.19		
		LTE Band 25	1.12		
		LTE Band 26	1.17		
		LTE Band 30	1.16		
		LTE Band 38 / 41	1.13		
		LTE Band 48	1.18		
		LTE Band 4 / 66	1.13		
		LTE Band 71	1.14		
		FR1	FR1 n2	0.97	
	FR1 n5		0.69		
	FR1 n7		0.82		
	FR1 n12		0.62		
	FR1 n41		0.75		
	FR1 n66		1.06		
	FR1 n71		0.63		
Date of Testing:			2020/10/11 – 2020/10/22		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.(FCC).This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng



2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02

3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Notebook Computer
Brand Name	Lenovo
Model Name	TP00111A
FCC ID	PU5-TP00111AUC
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM
EUT Stage	Production Unit
Remark: 1. This device is convertible type notebook PC, and there are two mode as usage way, one is laptop mode, another is tablet mode	



WLAN Information	
Integrated WLAN Module	Brand Name: Intel Model Name: AX201D2W
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit
Remark:	
1. The WLAN/BT module is also integrated into Lenove TP00111A host. The WLAN and Bluetooth SAR results are referenced from Sporton SAR report, report number: FA0D0217 (FCC ID: PU5AX201D2) and these SAR results are also used to perform simultaneous transmission analysis.	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	PU5-TP00111AUC							
Equipment Name	Notebook Computer							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM							
LTE Voice / Data requirements	Data only							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor.							
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 12.							
LTE Carrier Aggregation Additional Information	This device supports maximum of 6 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band														
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 5														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415		825.5		20425	826.5	20450		829			
M	20525	836.5	20525		836.5		20525	836.5	20525		836.5			
H	20643	848.3	20635		847.5		20625	846.5	20600		844			
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800		2505		20825	2507.5	20850		2510			
M	21100	2535	21100		2535		21100	2535	21100		2535			
H	21425	2567.5	21400		2565		21375	2562.5	21350		2560			
LTE Band 12														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025		700.5		23035	701.5	23060		704			
M	23095	707.5	23095		707.5		23095	707.5	23095		707.5			
H	23173	715.3	23165		714.5		23155	713.5	23130		711			
LTE Band 13														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)							
L	23205		779.5		23230		782							
M	23230		782											
H	23255		784.5											
LTE Band 14														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Channel #		Channel #		Freq.(MHz)							
L	23305		790.5		23330		793							
M	23330		793											
H	23355		795.5											
LTE Band 17														
	Bandwidth 5 MHz				Bandwidth 10 MHz									
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)							
L	23755		706.5		23780		709							
M	23790		710		23790		710							
H	23825		713.5		23800		711							

LTE Band 25												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 30												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #			Freq.(MHz)		Channel #				Freq.(MHz)		
L	27685			2307.5		27710				2310		
M	27710			2310								
H	27735			2312.5								
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580				
M	38000	2595	38000	2595	38000	2595	38000	2595				
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610				
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L M	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
	40620	2593	40620	2593	40620	2593	40620	2593				
H M	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673				
M	133297	680.5	133297	680.5	133297	680.5	133297	680.5				
H	133447	695.5	133422	693	133397	690.5	133372	688				
LTE Band 48												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560				
L M	55810	3607	55815	3607.5	55820	3608	55830	3609				
	56170	3643	56165	3642.5	56160	3642	56150	3641				
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690				

3.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information								
FCC	PU5-TP00111AUC							
Equipment Name	Notebook Computer							
Operating Frequency Range of each 5G NR transmission band	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz							
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n7: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n12: 5MHz, 10MHz, 15MHz 5G NR n41: 20MHz, 40MHz, 50MHz, 60MHz, 80MHz, 90MHz, 100MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n71: 5MHz, 10MHz, 15MHz, 20MHz							
SCS	FDD: SCS15KHz, TDD: SCS30KHz							
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM QPSK / 16QAM / 64QAM / 256QAM							
A-MPR (Additional MPR) disabled for SAR Testing?	Yes							
LTE Anchor Bands for n2	LTE B5/12/13/30/48/66							
LTE Anchor Bands for n5	LTE B2/7/12/48/66							
LTE Anchor Bands for n7	LTE B5/12							
LTE Anchor Bands for n12	LTE B2/66							
LTE Anchor Bands for n41	LTE B2/25/26/66							
LTE Anchor Bands for n66	LTE B5/12/13/30/48/71							
LTE Anchor Bands for n71	LTE B2/7/66							
Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839
NR Band 7								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	500500	2502.5	501000	2505	501500	2507.5	502000	2510
M	507000	2535	507000	2535	507000	2535	507000	2535
H	513500	2567.5	513000	2565	512500	2562.5	512000	2560

NR Band 12														
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz					
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)			
L	140300		701.5		140800		704		141300		706.5			
M	141500		707.5		141500		707.5		141500		707.5			
H	142700		713.5		142200		711		141700		708.5			
NR Band 41														
	Bandwidth 20MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	501204	2506.02	503202	2516.01	504204	2521.02	505200	2526	507204	2536.02	508200	2541	509202	2546.01
M	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99	518598	2592.99
H	535998	2679.99	534000	2670	532998	2664.99	531996	2659.98	529998	2649.99	528996	2644.98	528000	2640
NR Band 66														
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz				Bandwidth 20MHz	
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #	Freq. (MHz)
L	342500		1712.5		343000		1715		343500		1717.5		344000	1720
M	349000		1745		349000		1745		349000		1745		349000	1745
H	355500		1777.5		355000		1775		354500		1772.5		354000	1770
NR Band 71														
	Bandwidth 5MHz				Bandwidth 10MHz				Bandwidth 15MHz				Bandwidth 20MHz	
	Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #		Freq. (MHz)		Ch. #	Freq. (MHz)
L	133100		665.5		133600		668		13410		670.5		134600	673
M	136100		680.5		136100		680.5		136100		680.5		136100	680.5
H	139100		695.5		138600		693		13810		690.5		137600	688


4. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

For the device is fully integrated, touch sensing capacitive sensor. It uses a charge transfer capacitive acquisition method that is capable of near range proximity detection. In this device offers a state of the art capacitive sensing engine with an embedded sampling capacitor and voltage regulator allowing the overall solution cost to be reduced and improving system immunity in noisy environments.

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed. The details are illustrated as following, and the shortest triggering distances were reported and used for SAR assessment.

In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering distance than that for 1900MHz, and the tissue-equivalent medium for 1900MHz was used for formal proximity sensor triggering testing.

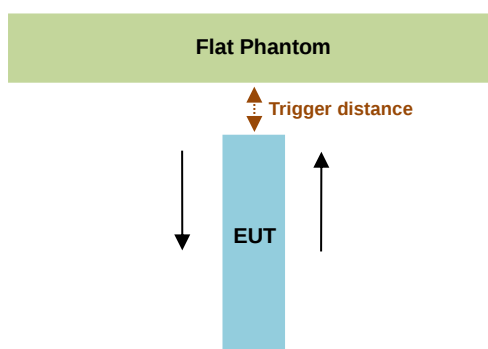

Proximity Sensor Trigger Distance (mm)								
Position	Main antenna							
	Bottom of Laptop		Bottom Face		Edge 1		Edge 2	
	moving toward	moving away	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	17	17	20	14	24	25	16	16


Proximity Sensor Trigger Distance (mm)						
Position	MIMO2 antenna					
	Bottom of Laptop		Bottom Face		Edge 4	
	moving toward	moving away	moving toward	moving away	moving toward	moving away
Minimum	16	16	13	13	11	11

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

Since the antenna and sensor are collocated and all of the peak SAR location is overlapping with the sensor pad for this device, therefore, According to KDB 616217 section 6.3, these procedures do not apply and are not required for Moving towards and Moving away due to the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor on this device.

<Tablet Tilt angle influences to proximity sensor triggering (KDB 616217 D04 section 6.4)>:

The influence of table tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at above separation distance. Rotating the tablet around the edge next to the phantom in $\leq 10^\circ$ increments until the tablet is $\pm 45^\circ$ from the vertical position at 0° , and the maximum output power remains in the reduced mode.

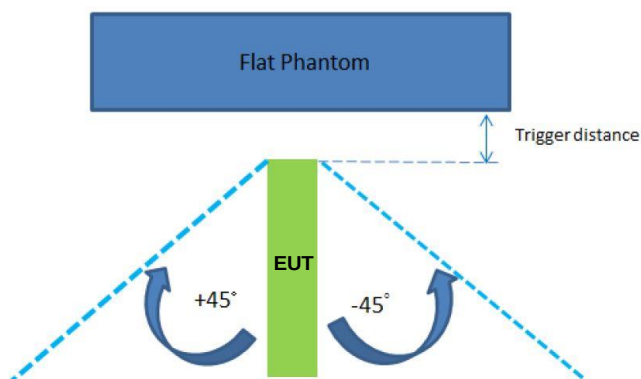



The Sensor Trigger Distance (mm)			
Position	Edge 1	Edge 2	Edge 4
Minimum	23	15	10



Proximity sensor power reduction



Exposure Position / wireless mode	Bottom face ⁽¹⁾ / Bottom of Laptop	Edge 1	Edge 2	Edge 3	Edge 4
WCDMA Band II Main	8.5 dB	8.5 dB	8.5 dB	0 dB	0 dB
WCDMA Band IV Main	7.5 dB	7.5 dB	7.5 dB	0 dB	0 dB
WCDMA Band V Main	4 dB	4 dB	4 dB	0 dB	0 dB
LTE Band 2 MIMO2	11.5 dB	0 dB	0 dB	0 dB	11.5 dB
LTE Band 5 Main	4 dB	4 dB	4 dB	0 dB	0 dB
LTE Band 7 Main	9.5 dB	9.5 dB	9.5 dB	0 dB	0 dB
LTE Band 7 MIMO2	12 dB	0 dB	0 dB	0 dB	12 dB
LTE Band 12 Main / 17 Main	6 dB	6 dB	6 dB	0 dB	0 dB
LTE Band 13 Main	5 dB	5 dB	5 dB	0 dB	0 dB
LTE Band 14 Main	4 dB	4 dB	4 dB	0 dB	0 dB
LTE Band 2 Main / 25 Main	7.5 dB	7.5 dB	7.5 dB	0 dB	0 dB
LTE Band 26 Main	4 dB	4 dB	4 dB	0 dB	0 dB
LTE Band 30 Main	8.5 dB	8.5 dB	8.5 dB	0 dB	0 dB
LTE Band 38 Main / 41 Main	10.5 dB	10.5 dB	10.5 dB	0 dB	0 dB
LTE Band 41_HPUE	10.5 dB	10.5 dB	10.5 dB	0 dB	0 dB
LTE Band 48 MIMO2	9 dB	0 dB	0 dB	0 dB	9 dB
LTE Band 4 Main / 66 Main	7 dB	7 dB	7 dB	0 dB	0 dB
LTE Band 66 MIMO2	12.4 dB	0 dB	0 dB	0 dB	12.4 dB
LTE Band 71 Main	6 dB	6 dB	6 dB	0 dB	0 dB
FR1 n2 Main	10.5 dB	10.5 dB	10.5 dB	0 dB	0 dB
FR1 n2 MIMO 2	11.5 dB	0 dB	0 dB	0 dB	11.5 dB
FR1 n5 Main	8.5 dB	8.5 dB	8.5 dB	0 dB	0 dB
FR1 n7 MIMO 2	12 dB	0 dB	0 dB	0 dB	12 dB
FR1 n12 Main	8.5 dB	8.5 dB	8.5 dB	0 dB	0 dB
FR1 n41 MIMO 2	14.5 dB	0 dB	0 dB	0 dB	14.5 dB
FR1 n66 Main	10 dB	10 dB	10 dB	0 dB	0 dB
FR1 n66 MIMO 2	11.5 dB	0 dB	0 dB	0 dB	11.5 dB
FR1 n71 Main	8 dB	8 dB	8 dB	0 dB	0 dB



Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
- Power reduction is not applicable for WLAN and Bluetooth.
- Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Bottom Face: [12 mm for MIMO2 antenna](#) and [13mm for Main antenna](#)
 - Bottom of Laptop: [15 mm for MIMO2 antenna](#) and [16mm for Main antenna](#)
 - Edge1: [22mm for Main antenna](#)
 - Edge2: [14mm for Main antenna](#)
 - Edge4: [9mm for MIMO2 antenna](#)

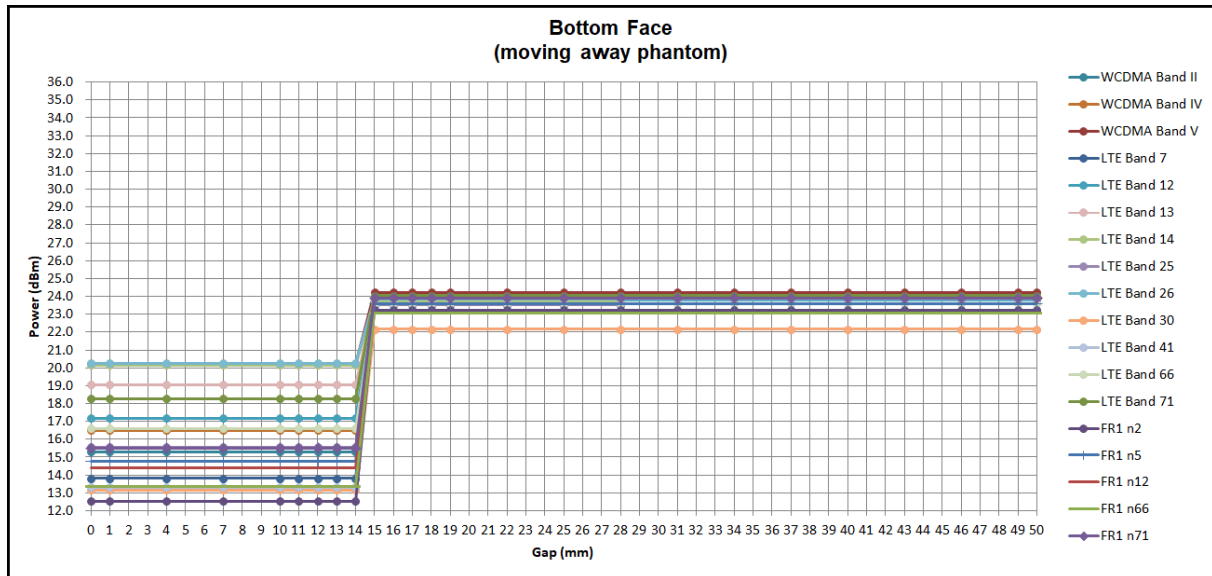
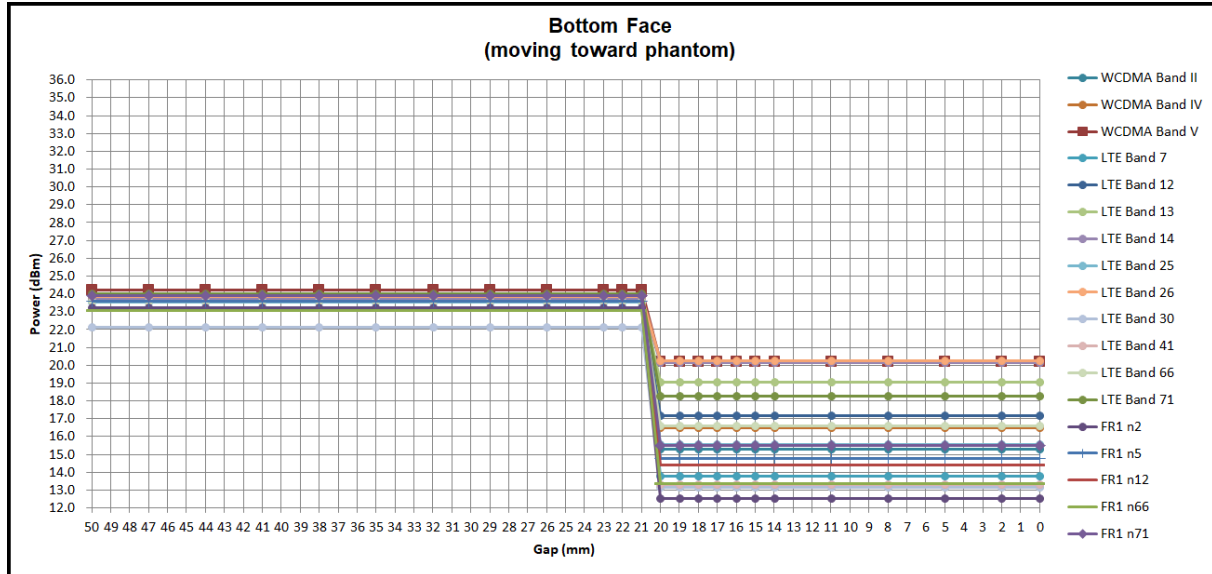
Power Measurement during Sensor Trigger distance testing
Main Antenna

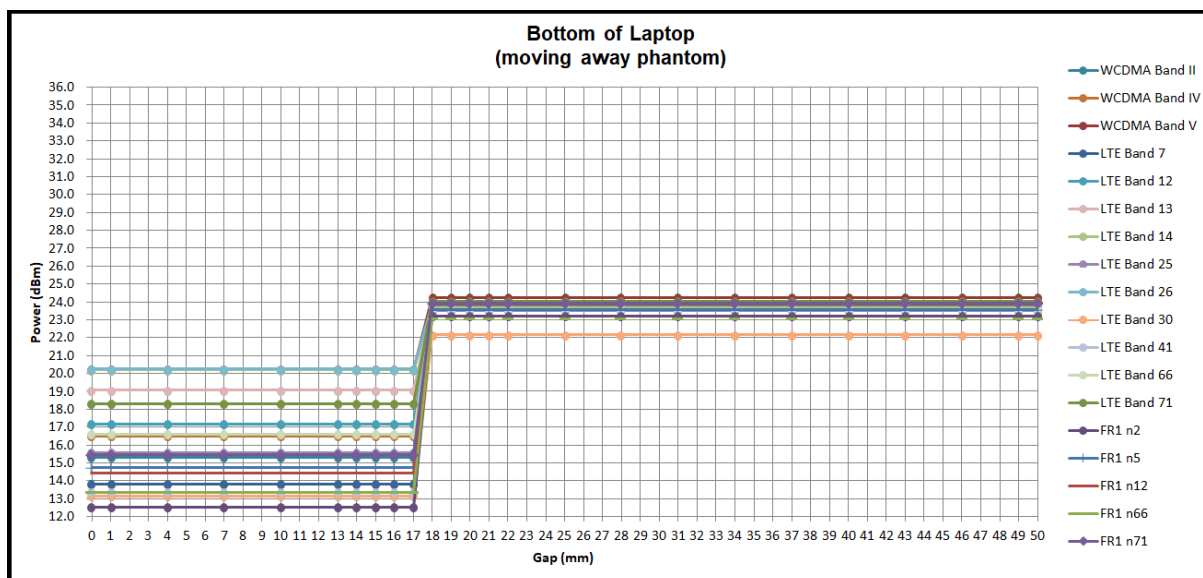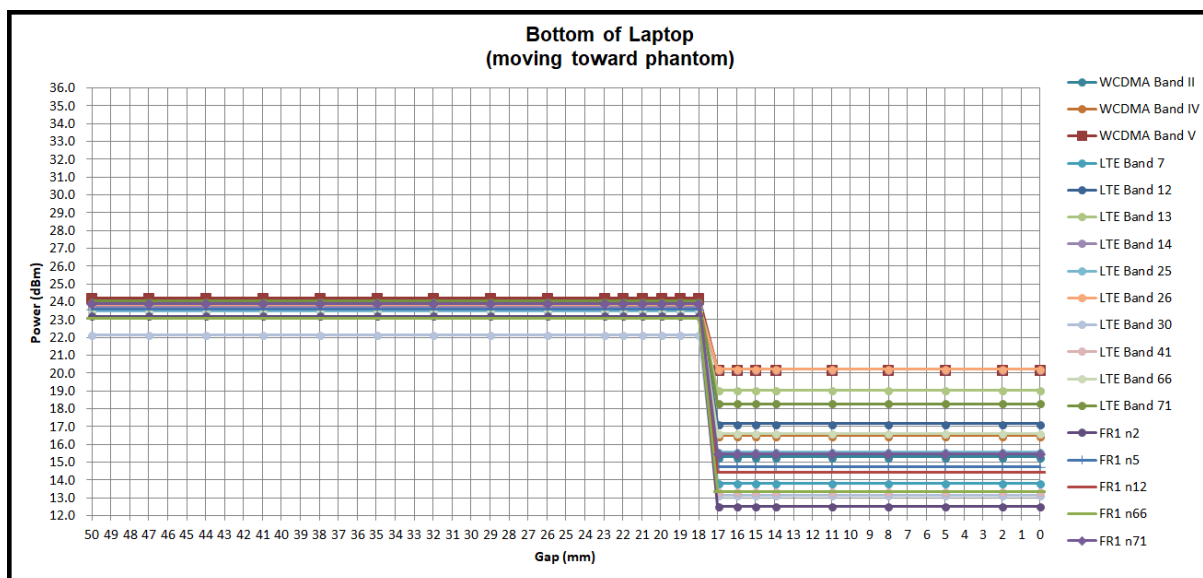
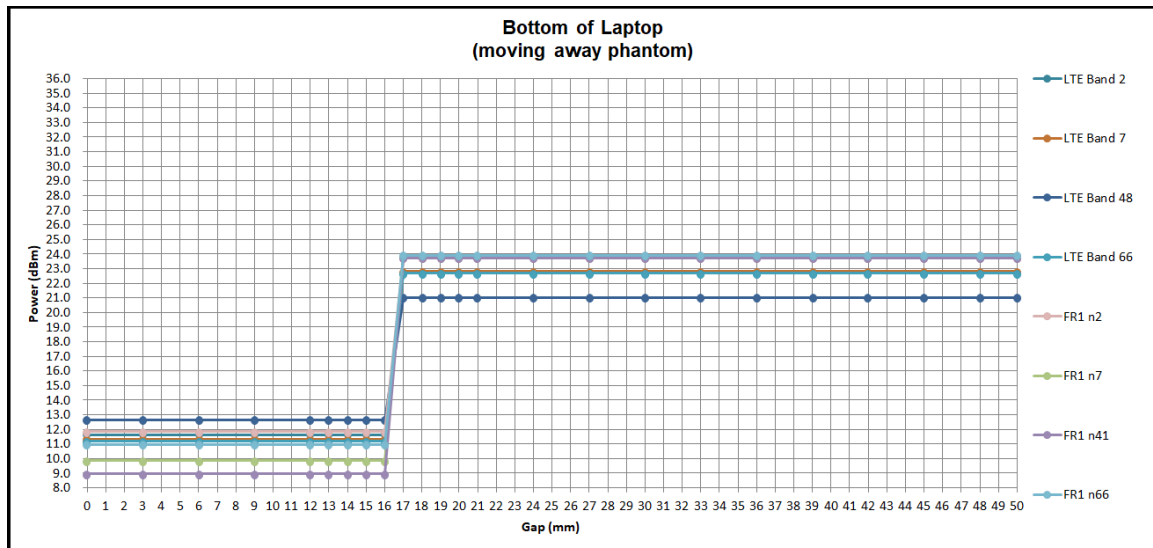
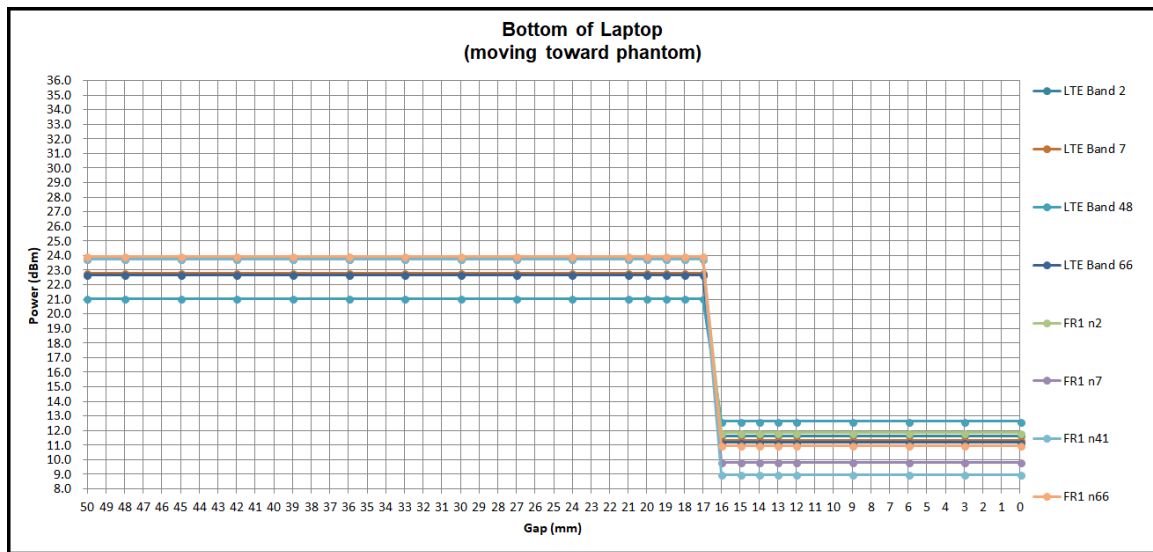


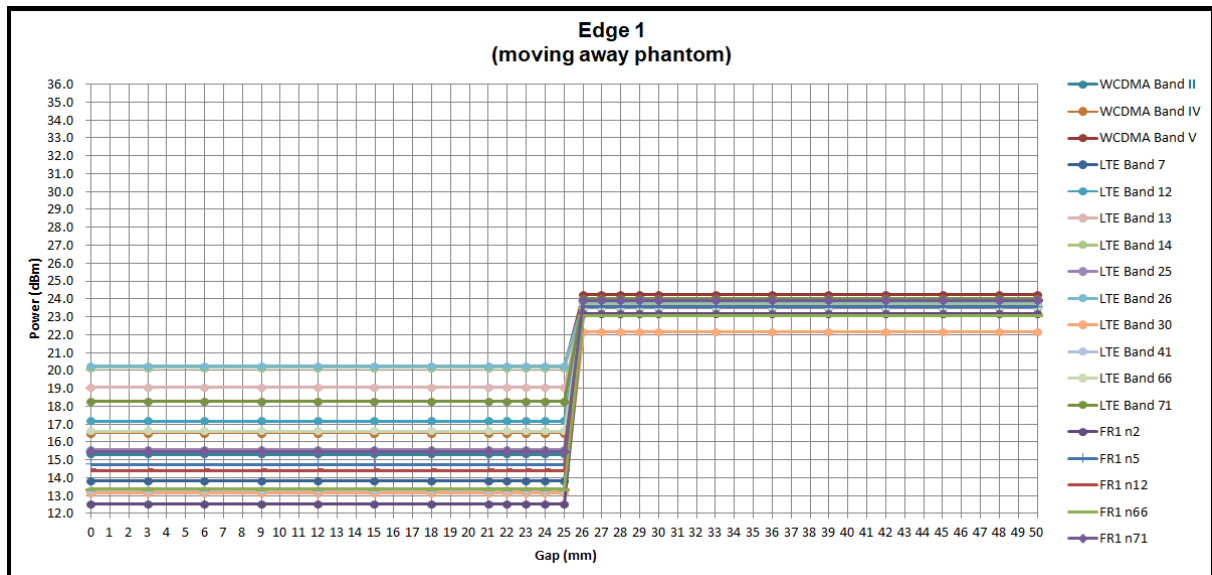
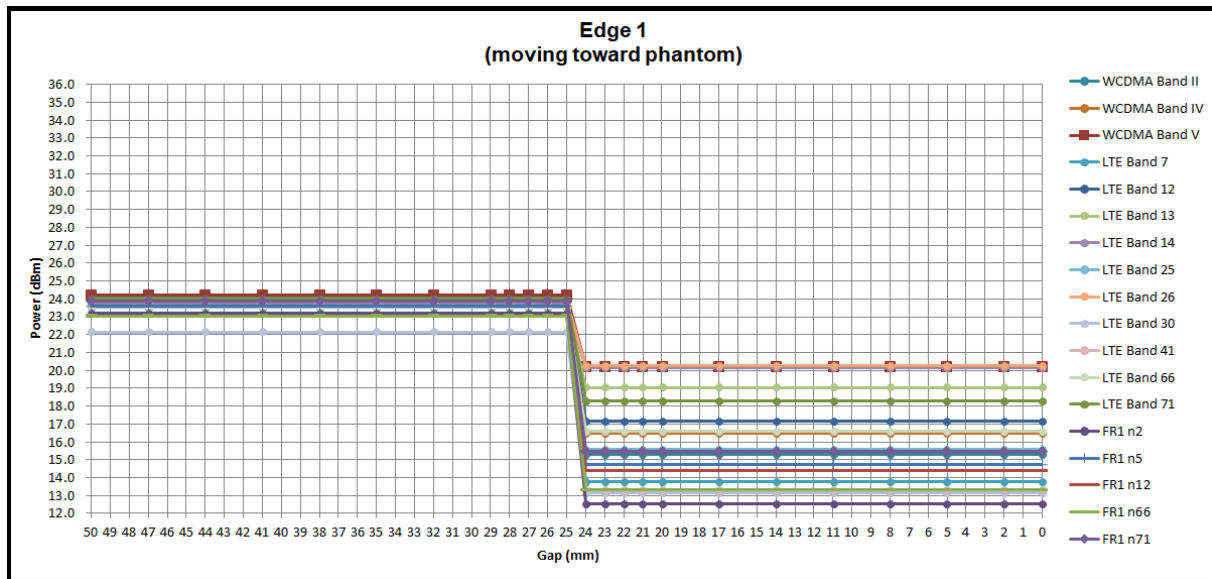


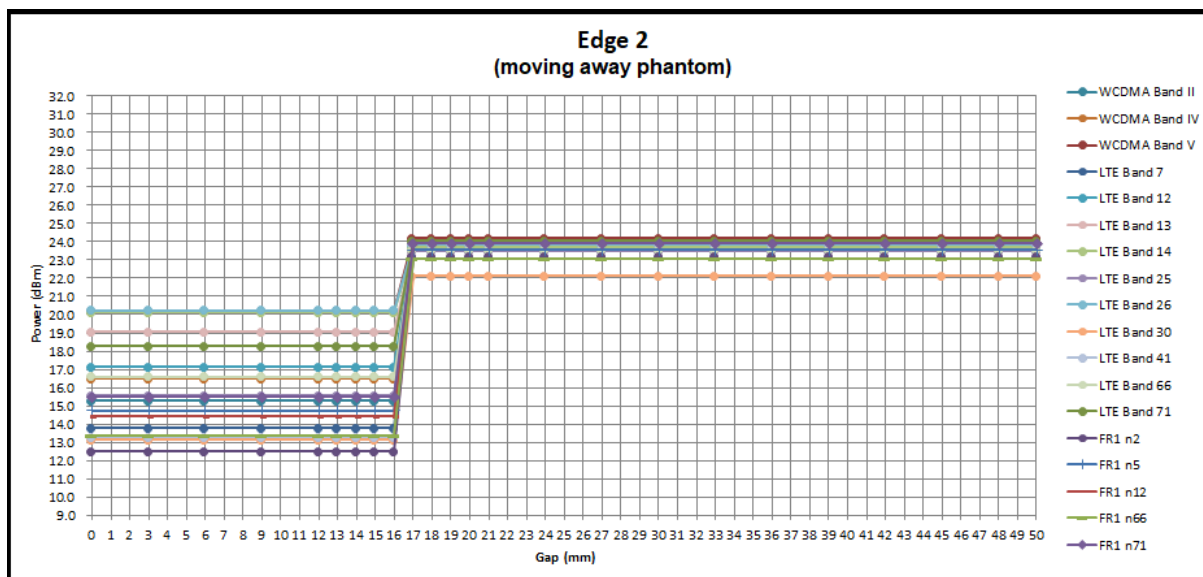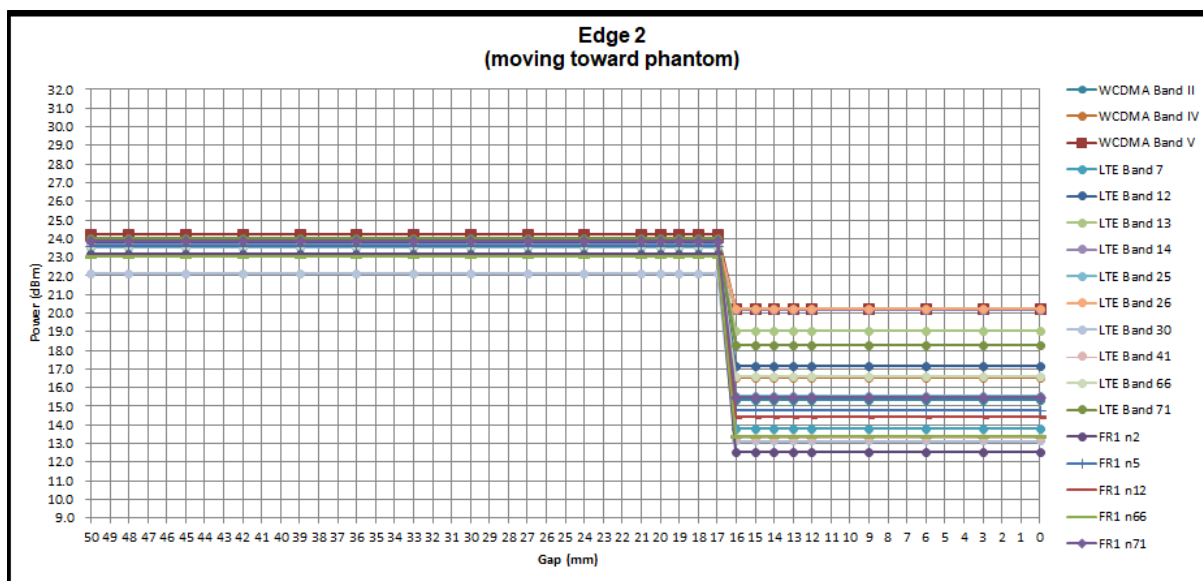

MIMO2 Antenna

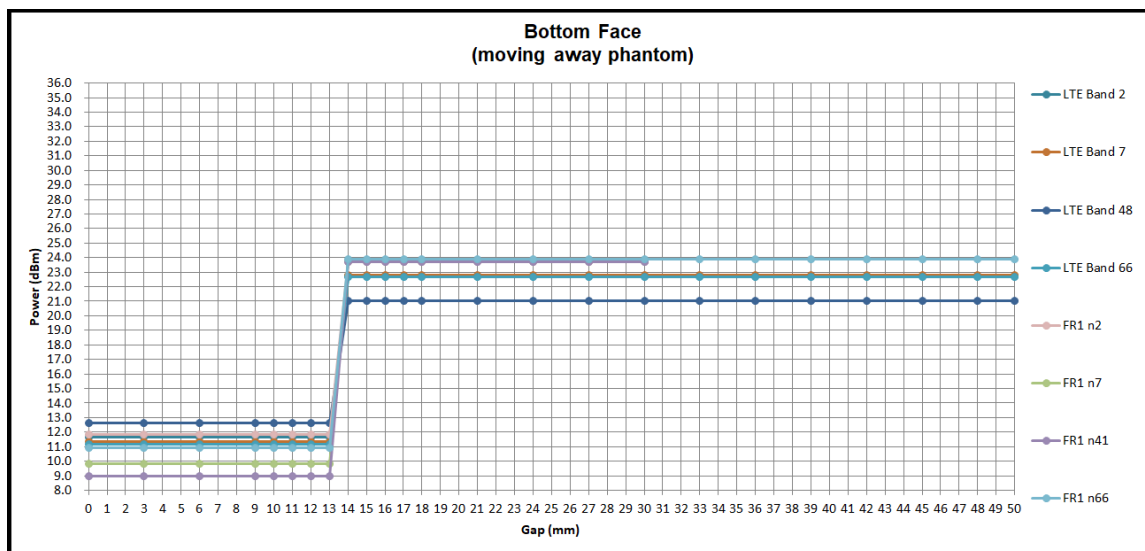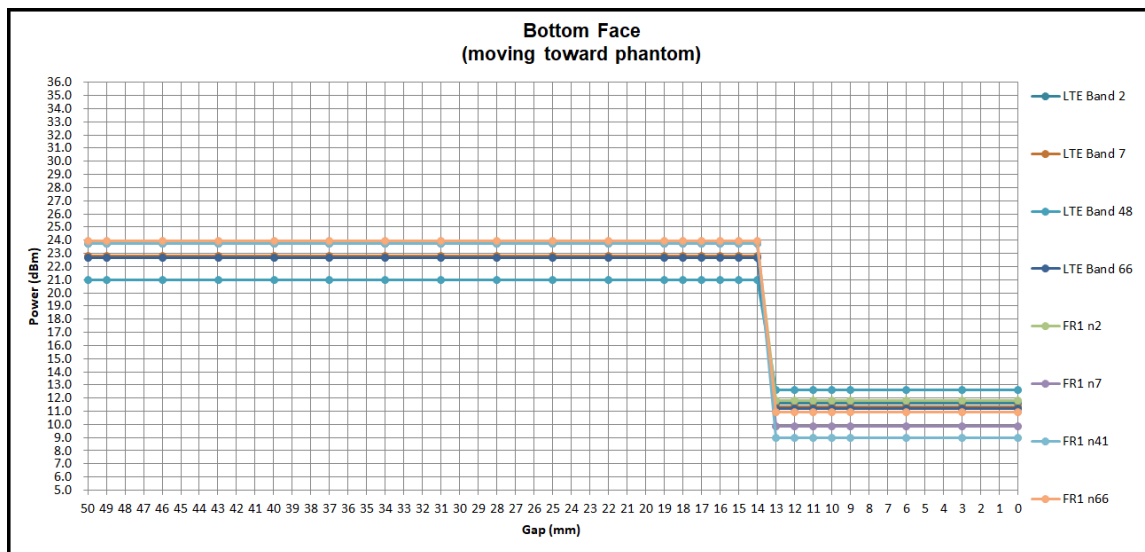



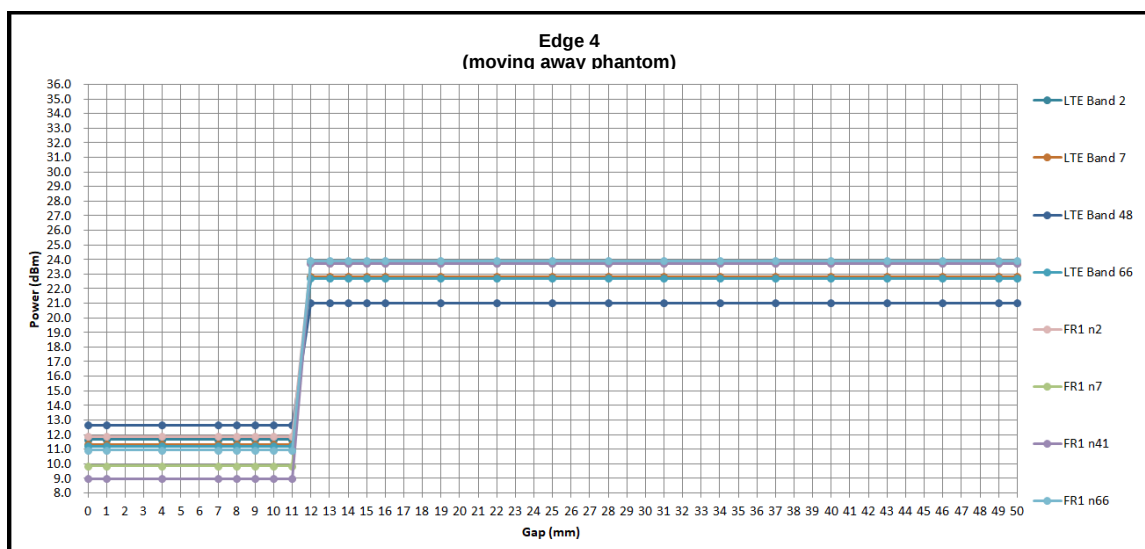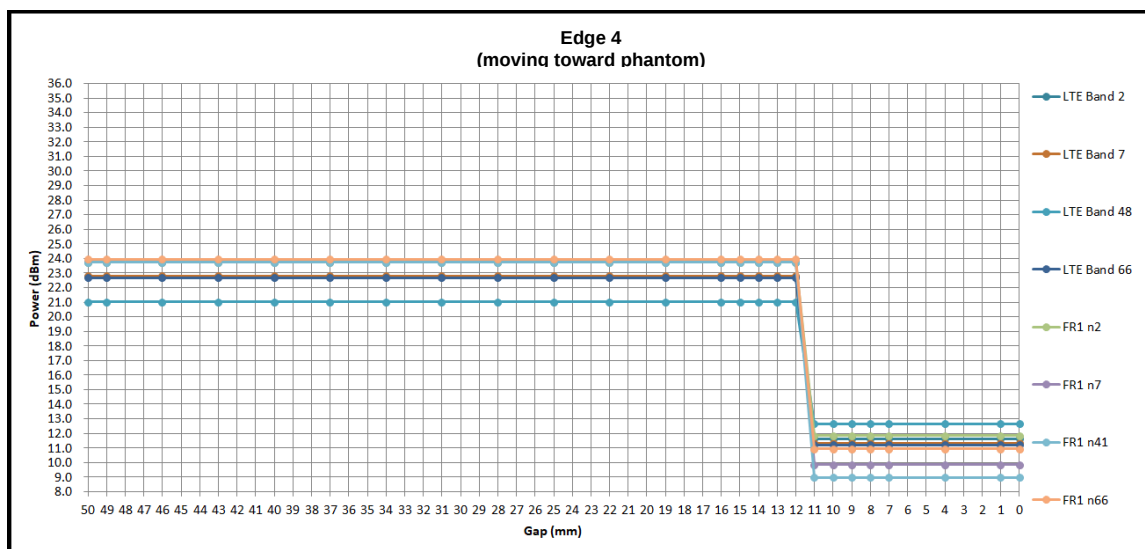

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

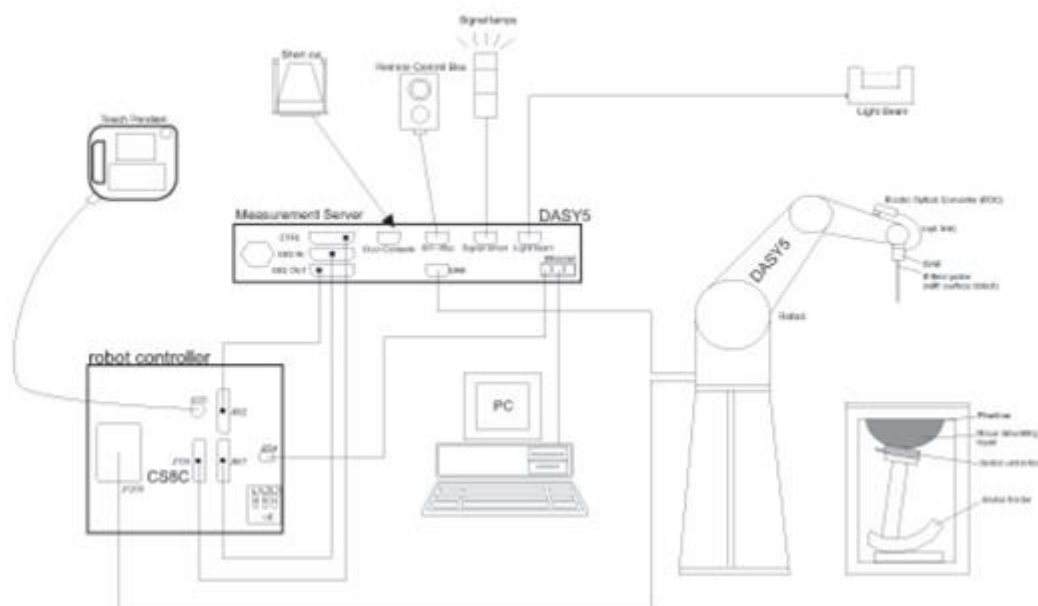

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 Test Site Location

The SAR measurement facilities used to collect data are within Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		

7.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	2300MHz System Validation Kit ⁽²⁾	D2300V2	1006	Jan. 28, 2019	Jan. 26, 2021
SPEAG	2600MHz System Validation Kit ⁽²⁾	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	3500MHz System Validation Kit ⁽²⁾	D3500V2	1014	Jan. 29, 2019	Jan. 27, 2021
SPEAG	3700MHz System Validation Kit ⁽²⁾	D3700V2	1006	Mar. 05, 2019	Mar. 03, 2021
SPEAG	Data Acquisition Electronics	DAE4	316	Dec. 20, 2019	Dec. 19, 2020
SPEAG	Data Acquisition Electronics	DAE4	854	May. 26, 2020	May. 25, 2021
SPEAG	Data Acquisition Electronics	DAE4	1311	Aug. 25, 2020	Aug. 24, 2021
SPEAG	Data Acquisition Electronics	DAE4	1399	Feb. 18, 2020	Feb. 17, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Dec. 18, 2019	Dec. 17, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3642	Apr. 29, 2020	Apr. 28, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3753	Jun. 25, 2020	Jun. 24, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 22, 2020	Jul. 21, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jun. 23, 2020	Jun. 22, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1240001	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Power Sensor	MA2411B	1207349	Sep. 01, 2020	Aug. 31, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 07, 2020	May. 06, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

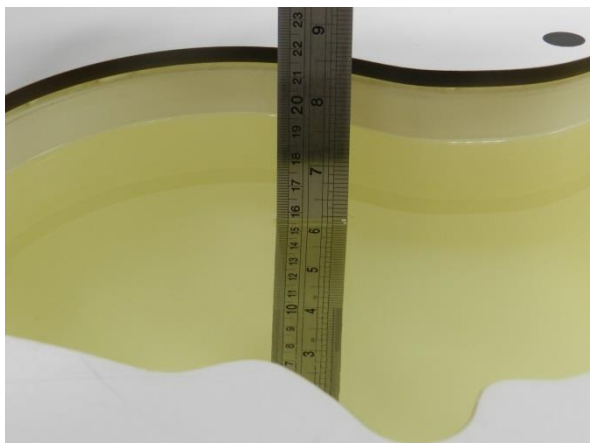


Fig 10.1Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.2	0.881	42.826	0.89	41.90	-1.01	2.21	±5	2020/10/13
750	22.2	0.878	42.746	0.89	41.90	-1.35	2.02	±5	2020/10/20
835	22.2	0.914	42.530	0.90	41.50	1.56	2.48	±5	2020/10/13
835	22.2	0.910	42.450	0.90	41.50	1.11	2.29	±5	2020/10/16
1750	22.2	1.364	40.866	1.37	40.10	-0.44	1.91	±5	2020/10/11
1750	22.2	1.354	40.756	1.37	40.10	-1.17	1.64	±5	2020/10/17
1900	22.2	1.439	39.113	1.40	40.00	2.79	-2.22	±5	2020/10/12
1900	22.2	1.422	38.953	1.40	40.00	1.57	-2.62	±5	2020/10/18
2300	22.2	1.670	39.653	1.67	39.50	0.00	0.39	±5	2020/10/21
2600	22.2	2.002	38.358	1.96	39.00	2.14	-1.65	±5	2020/10/14
2600	22.2	2.018	38.468	1.96	39.00	2.96	-1.36	±5	2020/10/19
3500	22.2	2.984	39.194	2.91	37.90	2.54	3.41	±5	2020/10/15
3500	22.2	2.936	37.527	2.91	37.90	0.89	-0.98	±5	2020/10/22
3700	22.2	3.142	38.977	3.12	37.70	0.71	3.39	±5	2020/10/15
3700	22.2	3.121	37.228	3.12	37.70	0.03	-1.25	±5	2020/10/22

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/10/13	750	250	D750V3-1107	EX3DV4 - SN7306	DAE4 Sn1399	2.19	8.32	8.76	5.29
2020/10/20	750	250	D750V3-1107	EX3DV4 - SN7306	DAE4 Sn1399	2.18	8.32	8.72	4.81
2020/10/13	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1399	2.60	9.55	10.4	8.90
2020/10/16	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1399	2.59	9.55	10.36	8.48
2020/10/11	1750	250	D1750V2-1112	EX3DV4 - SN7306	DAE4 Sn1399	9.96	36.70	39.84	8.56
2020/10/17	1750	250	D1750V2-1112	EX3DV4 - SN7306	DAE4 Sn1399	9.88	36.70	39.52	7.68
2020/10/12	1900	250	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1399	10.60	40.20	42.4	5.47
2020/10/18	1900	250	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1399	10.50	40.20	42	4.48
2020/10/21	2300	250	D2300V2-1006	ES3DV3 - SN3124	DAE4 Sn316	12.60	48.70	50.4	3.49
2020/10/14	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1399	15.10	56.40	60.4	7.09
2020/10/19	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1399	15.20	56.40	60.8	7.80
2020/10/15	3500	100	D3500V2-1014	EX3DV4 - SN3753	DAE4 Sn854	6.51	67.90	65.1	-4.12
2020/10/22	3500	100	D3500V2-1014	EX3DV4 - SN3642	DAE4 Sn1311	6.48	67.90	64.8	-4.57
2020/10/15	3700	100	D3700V2-1006	EX3DV4 - SN3753	DAE4 Sn854	6.73	67.30	67.3	0.00
2020/10/22	3700	100	D3700V2-1006	EX3DV4 - SN3642	DAE4 Sn1311	6.38	67.30	63.8	-5.20

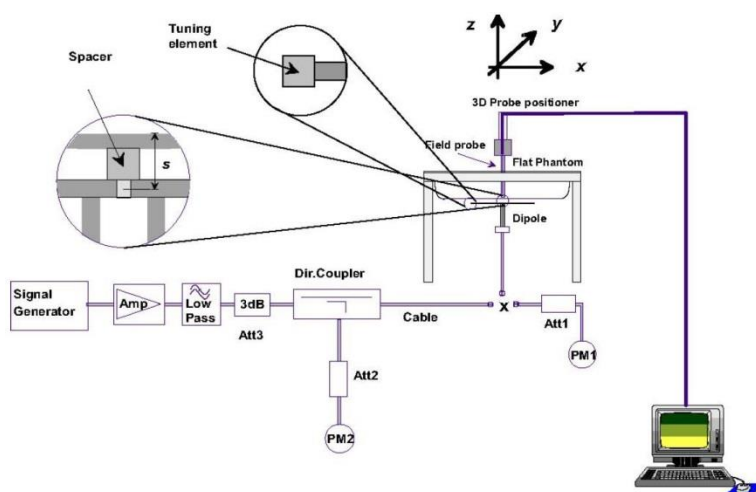


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Cycle to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

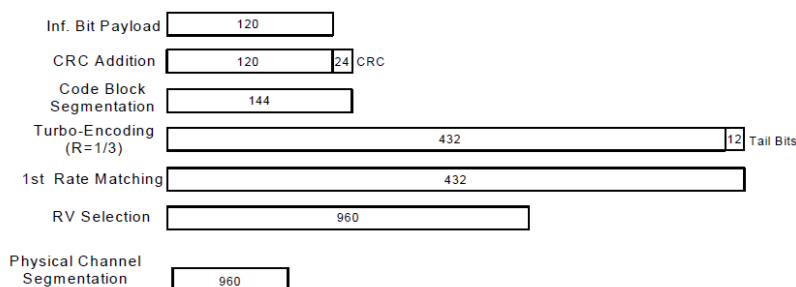
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parms
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Default Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	Tune-up Limit (dBm)	1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	24.02	23.94	23.87	24.50	23.85	23.92	23.90	24.50	24.15	24.22	24.17	24.50
3GPP Rel 6	HSDPA Subtest-1	23.39	23.33	23.33	23.50	23.28	23.01	22.92	23.50	22.92	23.10	23.22	23.50
3GPP Rel 6	HSDPA Subtest-2	23.08	23.00	23.01	23.50	23.28	23.03	22.96	23.50	22.38	22.66	22.65	23.50
3GPP Rel 6	HSDPA Subtest-3	22.59	22.50	22.62	23.00	23.00	22.80	22.86	23.00	22.39	22.55	22.65	23.00
3GPP Rel 6	HSDPA Subtest-4	22.67	22.62	22.38	23.00	22.86	22.76	22.87	23.00	22.53	22.59	22.64	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.82	22.85	22.69	23.50	22.89	22.78	22.83	23.50	22.93	23.14	23.22	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.99	22.85	22.76	23.50	23.07	22.68	22.86	23.50	22.45	22.68	22.67	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.39	22.32	22.31	23.00	22.48	22.20	22.23	23.00	22.33	22.70	22.71	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.48	22.40	22.38	23.00	22.78	22.77	22.84	23.00	21.98	22.08	22.68	23.00
3GPP Rel 6	HSUPA Subtest-1	21.92	21.86	21.82	23.50	21.66	21.61	21.60	23.50	22.50	22.57	22.75	23.50
3GPP Rel 6	HSUPA Subtest-2	21.50	21.08	21.09	21.50	20.54	20.28	20.41	21.50	21.11	21.31	21.37	21.50
3GPP Rel 6	HSUPA Subtest-3	21.47	21.44	21.34	22.50	21.12	20.84	20.88	22.50	21.95	22.09	22.20	22.50
3GPP Rel 6	HSUPA Subtest-4	21.24	21.09	21.03	21.50	20.70	20.46	20.40	21.50	21.04	21.20	21.39	21.50
3GPP Rel 6	HSUPA Subtest-5	22.46	22.32	22.14	23.50	21.75	21.56	21.55	23.50	22.74	22.88	22.86	23.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	20.37	20.11	20.02	21.00	20.22	20.00	19.87	21.00	20.51	20.65	20.60	21.00


Reduced Power Mode

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	Tune-up Limit (dBm)	1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	15.07	15.22	15.31	16.00	16.47	16.50	16.48	17.00	20.15	20.21	20.20	20.50
3GPP Rel 6	HSDPA Subtest-1	14.32	14.31	14.30	15.00	15.40	15.47	15.47	16.00	19.13	19.25	19.18	19.50
3GPP Rel 6	HSDPA Subtest-2	14.40	14.29	14.26	15.00	15.40	15.47	15.46	16.00	19.16	19.25	19.20	19.50
3GPP Rel 6	HSDPA Subtest-3	13.84	13.82	13.42	14.50	14.91	15.04	14.95	15.50	18.65	18.72	18.70	19.00
3GPP Rel 6	HSDPA Subtest-4	13.86	13.79	13.76	14.50	14.95	14.94	14.94	15.50	18.62	18.75	18.69	19.00
3GPP Rel 8	DC-HSDPA Subtest-1	14.31	14.33	14.21	15.00	15.46	15.47	15.56	16.00	19.07	19.26	19.24	19.50
3GPP Rel 8	DC-HSDPA Subtest-2	14.36	14.20	14.27	15.00	15.34	15.52	15.39	16.00	19.24	19.26	19.27	19.50
3GPP Rel 8	DC-HSDPA Subtest-3	13.94	13.92	13.39	14.50	14.83	15.05	14.93	15.50	18.64	18.77	18.71	19.00
3GPP Rel 8	DC-HSDPA Subtest-4	13.88	13.74	13.77	14.50	14.94	14.99	14.96	15.50	18.55	18.70	18.79	19.00
3GPP Rel 6	HSUPA Subtest-1	14.15	14.01	14.05	15.00	15.58	15.67	15.41	16.00	19.13	19.21	19.17	19.50
3GPP Rel 6	HSUPA Subtest-2	12.05	12.27	12.25	13.00	13.37	13.45	13.18	14.00	17.14	17.18	17.19	17.50
3GPP Rel 6	HSUPA Subtest-3	13.06	13.18	13.31	14.00	14.40	14.39	14.25	15.00	18.18	18.21	18.19	18.50
3GPP Rel 6	HSUPA Subtest-4	12.10	12.03	11.97	13.00	13.06	13.13	13.17	14.00	17.19	17.21	17.17	17.50
3GPP Rel 6	HSUPA Subtest-5	14.10	14.00	14.00	15.00	15.10	15.10	15.20	16.00	19.10	19.20	19.10	19.50

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2/4/17/38 SAR test was covered by Band 25/66/12/41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

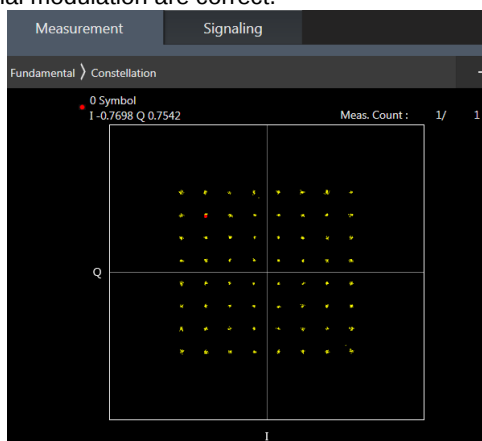

64QAM



16QAM

Default Power Mode
<LTE Band 2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.39	23.41	23.58	24	0
20	QPSK	1	49	23.51	23.31	23.28		
20	QPSK	1	99	23.39	23.27	23.26		
20	QPSK	50	0	22.69	22.44	22.46	23	1
20	QPSK	50	24	22.67	22.55	22.58		
20	QPSK	50	50	22.63	22.49	22.57		
20	QPSK	100	0	22.71	22.49	22.56	23	1
20	16QAM	1	0	22.95	22.69	22.87		
20	16QAM	1	49	22.84	22.68	22.73		
20	16QAM	1	99	22.69	22.65	22.64	22	2
20	16QAM	50	0	21.71	21.45	21.54		
20	16QAM	50	24	21.68	21.55	21.61		
20	16QAM	50	50	21.66	21.53	21.57	22	2
20	16QAM	100	0	21.66	21.50	21.59		
20	64QAM	1	0	21.76	21.59	21.68		
20	64QAM	1	49	21.71	21.63	21.68	22	2
20	64QAM	1	99	21.70	21.55	21.65		
20	64QAM	50	0	20.71	20.48	20.55		
20	64QAM	50	24	20.71	20.58	20.65	21	3
20	64QAM	50	50	20.64	20.54	20.60		
20	64QAM	100	0	20.69	20.53	20.60		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.49	23.38	23.36	24	0
15	QPSK	1	37	23.49	23.21	23.19		
15	QPSK	1	74	23.34	23.24	23.26		
15	QPSK	36	0	22.62	22.34	22.45	23	1
15	QPSK	36	20	22.61	22.53	22.53		
15	QPSK	36	39	22.56	22.48	22.57		
15	QPSK	75	0	22.67	22.42	22.50	23	1
15	16QAM	1	0	22.91	22.67	22.80		
15	16QAM	1	37	22.74	22.58	22.64		
15	16QAM	1	74	22.59	22.65	22.62	22	2
15	16QAM	36	0	21.70	21.44	21.48		
15	16QAM	36	20	21.68	21.53	21.60		
15	16QAM	36	39	21.65	21.44	21.56	22	2
15	16QAM	75	0	21.60	21.44	21.58		
15	64QAM	1	0	21.66	21.55	21.66		
15	64QAM	1	37	21.65	21.53	21.67	22	2
15	64QAM	1	74	21.64	21.46	21.58		
15	64QAM	36	0	20.70	20.45	20.45		
15	64QAM	36	20	20.62	20.58	20.60	21	3
15	64QAM	36	39	20.63	20.45	20.51		
15	64QAM	75	0	20.61	20.53	20.52		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.55	23.41	23.36	24	0
10	QPSK	1	25	23.51	23.30	23.24		
10	QPSK	1	49	23.38	23.21	23.16		
10	QPSK	25	0	22.61	22.36	22.39	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	12	22.66	22.53	22.55		
10	QPSK	25	25	22.60	22.49	22.51		
10	QPSK	50	0	22.61	22.45	22.48		
10	16QAM	1	0	22.89	22.62	22.85	23	1
10	16QAM	1	25	22.77	22.66	22.68		
10	16QAM	1	49	22.65	22.62	22.54		
10	16QAM	25	0	21.67	21.38	21.54	22	2
10	16QAM	25	12	21.62	21.45	21.56		
10	16QAM	25	25	21.64	21.52	21.49		
10	16QAM	50	0	21.56	21.46	21.51	22	2
10	64QAM	1	0	21.68	21.57	21.62		
10	64QAM	1	25	21.69	21.60	21.67		
10	64QAM	1	49	21.64	21.55	21.56	21	3
10	64QAM	25	0	20.61	20.41	20.47		
10	64QAM	25	12	20.70	20.50	20.56		
10	64QAM	25	25	20.64	20.50	20.60		
10	64QAM	50	0	20.61	20.52	20.51		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.52	23.36	23.30	24	0
5	QPSK	1	12	23.49	23.25	23.25		
5	QPSK	1	24	23.33	23.17	23.18		
5	QPSK	12	0	22.67	22.35	22.39	23	1
5	QPSK	12	7	22.67	22.46	22.50		
5	QPSK	12	13	22.63	22.41	22.49		
5	QPSK	25	0	22.70	22.42	22.52	23	1
5	16QAM	1	0	22.86	22.64	22.82		
5	16QAM	1	12	22.75	22.62	22.67		
5	16QAM	1	24	22.59	22.64	22.56	22	2
5	16QAM	12	0	21.66	21.40	21.45		
5	16QAM	12	7	21.58	21.52	21.59		
5	16QAM	12	13	21.66	21.45	21.47	22	2
5	16QAM	25	0	21.59	21.43	21.52		
5	64QAM	1	0	21.74	21.59	21.60		
5	64QAM	1	12	21.65	21.54	21.68	22	2
5	64QAM	1	24	21.66	21.50	21.63		
5	64QAM	12	0	20.62	20.46	20.48		
5	64QAM	12	7	20.63	20.57	20.56	21	3
5	64QAM	12	13	20.62	20.47	20.56		
5	64QAM	25	0	20.69	20.49	20.53		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.55	23.32	23.37	24	0
3	QPSK	1	8	23.49	23.21	23.18		
3	QPSK	1	14	23.33	23.20	23.19		
3	QPSK	8	0	22.67	22.37	22.38	23	1
3	QPSK	8	4	22.60	22.46	22.57		
3	QPSK	8	7	22.62	22.49	22.48		
3	QPSK	15	0	22.65	22.49	22.49	23	1
3	16QAM	1	0	22.91	22.69	22.81		
3	16QAM	1	8	22.77	22.60	22.64		
3	16QAM	1	14	22.60	22.58	22.58	22	2
3	16QAM	8	0	21.66	21.39	21.54		
3	16QAM	8	4	21.68	21.49	21.61		
3	16QAM	8	7	21.62	21.46	21.54		
3	16QAM	15	0	21.61	21.47	21.50		



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	0	21.66	21.56	21.62	22	2
3	64QAM	1	8	21.64	21.60	21.58		
3	64QAM	1	14	21.67	21.52	21.65		
3	64QAM	8	0	20.71	20.41	20.46	21	3
3	64QAM	8	4	20.65	20.56	20.60		
3	64QAM	8	7	20.56	20.50	20.56		
3	64QAM	15	0	20.61	20.43	20.52		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.53	23.33	23.34	24	0
1.4	QPSK	1	3	23.41	23.26	23.18		
1.4	QPSK	1	5	23.37	23.23	23.22		
1.4	QPSK	3	0	23.51	23.32	23.34		
1.4	QPSK	3	1	23.50	23.28	23.28		
1.4	QPSK	3	3	23.36	23.18	23.22		
1.4	QPSK	6	0	22.64	22.40	22.55	23	1
1.4	16QAM	1	0	22.89	22.61	22.85	23	1
1.4	16QAM	1	3	22.84	22.59	22.64		
1.4	16QAM	1	5	22.63	22.59	22.58		
1.4	16QAM	3	0	22.94	22.66	22.79		
1.4	16QAM	3	1	22.84	22.67	22.67		
1.4	16QAM	3	3	22.63	22.59	22.58		
1.4	16QAM	6	0	21.64	21.43	21.51	22	2
1.4	64QAM	1	0	21.67	21.55	21.66	22	2
1.4	64QAM	1	3	21.71	21.58	21.68		
1.4	64QAM	1	5	21.67	21.55	21.55		
1.4	64QAM	3	0	21.69	21.58	21.58		
1.4	64QAM	3	1	21.62	21.54	21.64		
1.4	64QAM	3	3	21.61	21.53	21.64		
1.4	64QAM	6	0	20.63	20.45	20.51	21	3

<LTE Band 2 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.70	22.55	22.74	24	0
20	QPSK	1	49	22.50	22.47	22.52		
20	QPSK	1	99	22.44	22.50	22.50		
20	QPSK	50	0	22.54	22.46	22.56	23	1
20	QPSK	50	24	21.96	22.04	21.97		
20	QPSK	50	50	22.01	22.02	21.94		
20	QPSK	100	0	21.95	22.04	22.05	23	1
20	16QAM	1	0	21.96	22.06	22.04		
20	16QAM	1	49	22.11	22.12	22.08		
20	16QAM	1	99	21.96	22.04	22.00	22	2
20	16QAM	50	0	20.87	20.96	20.88		
20	16QAM	50	24	21.03	21.06	21.04		
20	16QAM	50	50	20.95	21.03	20.93	22	2
20	16QAM	100	0	20.97	20.98	20.90		
20	64QAM	1	0	20.48	20.49	20.42	22	2
20	64QAM	1	49	20.56	20.63	20.56		
20	64QAM	1	99	20.96	20.98	20.90		
20	64QAM	50	0	19.88	19.89	19.82	21	3
20	64QAM	50	24	19.96	20.00	19.90		
20	64QAM	50	50	19.95	19.98	19.95		
20	64QAM	100	0	19.96	19.99	19.95		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.63	22.70	22.52	24	0
15	QPSK	1	37	22.50	22.56	22.48		
15	QPSK	1	74	22.35	22.43	22.50		
15	QPSK	36	0	22.51	22.46	22.41	23	1
15	QPSK	36	20	21.95	22.00	21.89		
15	QPSK	36	39	21.96	21.98	21.85		
15	QPSK	75	0	21.94	21.99	21.95	23	1
15	16QAM	1	0	21.87	22.01	21.99		
15	16QAM	1	37	22.07	22.04	22.08		
15	16QAM	1	74	21.86	22.02	21.96	22	2
15	16QAM	36	0	20.84	20.91	20.86		
15	16QAM	36	20	21.01	21.01	21.01		
15	16QAM	36	39	20.92	21.01	20.89	22	2
15	16QAM	75	0	20.93	20.95	20.83		
15	64QAM	1	0	20.41	20.42	20.42		
15	64QAM	1	37	20.50	20.57	20.55	22	2
15	64QAM	1	74	20.96	20.89	20.82		
15	64QAM	36	0	19.80	19.86	19.75		
15	64QAM	36	20	19.89	19.98	19.90	21	3
15	64QAM	36	39	19.87	19.91	19.95		
15	64QAM	75	0	19.96	19.95	19.86		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.66	22.66	22.45	24	0
10	QPSK	1	25	22.46	22.56	22.48		
10	QPSK	1	49	22.42	22.43	22.47		
10	QPSK	25	0	22.54	22.48	22.37	23	1
10	QPSK	25	12	21.90	21.99	21.94		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	21.93	22.02	21.94		
10	QPSK	50	0	21.90	22.00	21.92		
10	16QAM	1	0	21.88	22.00	22.04		
10	16QAM	1	25	22.08	22.02	22.04	23	1
10	16QAM	1	49	21.92	22.00	21.93		
10	16QAM	25	0	20.83	20.86	20.79		
10	16QAM	25	12	20.98	21.02	20.99	22	2
10	16QAM	25	25	20.91	20.96	20.83		
10	16QAM	50	0	20.90	20.91	20.87		
10	64QAM	1	0	20.48	20.48	20.41	22	2
10	64QAM	1	25	20.56	20.57	20.56		
10	64QAM	1	49	20.87	20.90	20.85		
10	64QAM	25	0	19.83	19.81	19.72	21	3
10	64QAM	25	12	19.92	19.93	19.89		
10	64QAM	25	25	19.87	19.92	19.89		
10	64QAM	50	0	19.88	19.94	19.92		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.64	22.65	22.55	24	0
5	QPSK	1	12	22.43	22.55	22.49		
5	QPSK	1	24	22.36	22.43	22.48		
5	QPSK	12	0	22.44	22.46	22.44	23	1
5	QPSK	12	7	21.94	22.02	21.97		
5	QPSK	12	13	22.01	22.00	21.93		
5	QPSK	25	0	21.91	21.98	21.93	23	1
5	16QAM	1	0	21.91	22.06	21.97		
5	16QAM	1	12	22.10	22.04	22.06		
5	16QAM	1	24	21.89	21.99	21.96	22	2
5	16QAM	12	0	20.77	20.89	20.82		
5	16QAM	12	7	20.96	20.96	20.97		
5	16QAM	12	13	20.94	21.00	20.84	22	2
5	16QAM	25	0	20.87	20.92	20.84		
5	64QAM	1	0	20.38	20.43	20.38		
5	64QAM	1	12	20.51	20.58	20.53	22	2
5	64QAM	1	24	20.89	20.90	20.88		
5	64QAM	12	0	19.81	19.82	19.82		
5	64QAM	12	7	19.90	19.90	19.87	21	3
5	64QAM	12	13	19.94	19.91	19.93		
5	64QAM	25	0	19.91	19.94	19.87		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.65	22.65	22.45	24	0
3	QPSK	1	8	22.50	22.50	22.46		
3	QPSK	1	14	22.35	22.47	22.46		
3	QPSK	8	0	22.47	22.54	22.36	23	1
3	QPSK	8	4	21.96	21.99	21.92		
3	QPSK	8	7	21.92	21.92	21.88		
3	QPSK	15	0	21.92	21.94	21.86	23	1
3	16QAM	1	0	21.93	22.02	22.01		
3	16QAM	1	8	22.06	22.10	22.04		
3	16QAM	1	14	21.89	21.95	21.96	22	2
3	16QAM	8	0	20.80	20.94	20.84		
3	16QAM	8	4	21.01	21.02	20.96		
3	16QAM	8	7	20.91	21.00	20.90	22	2
3	16QAM	15	0	20.90	20.97	20.83		
3	64QAM	1	0	20.47	20.39	20.40	22	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	20.51	20.56	20.49	21	3
3	64QAM	1	14	20.86	20.89	20.80		
3	64QAM	8	0	19.78	19.80	19.82		
3	64QAM	8	4	19.93	19.99	19.80		
3	64QAM	8	7	19.89	19.90	19.89		
3	64QAM	15	0	19.94	19.99	19.89		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.61	22.73	22.51	24	0
1.4	QPSK	1	3	22.42	22.51	22.46		
1.4	QPSK	1	5	22.36	22.42	22.41		
1.4	QPSK	3	0	22.47	22.46	22.45		
1.4	QPSK	3	1	22.35	22.43	22.46		
1.4	QPSK	3	3	22.49	22.45	22.32		
1.4	QPSK	6	0	21.87	21.99	21.92	23	1
1.4	16QAM	1	0	21.86	22.05	21.96	23	1
1.4	16QAM	1	3	22.05	22.04	22.05		
1.4	16QAM	1	5	21.86	21.95	21.90		
1.4	16QAM	3	0	21.83	21.93	21.93		
1.4	16QAM	3	1	22.03	22.06	22.04		
1.4	16QAM	3	3	21.78	21.97	21.83		
1.4	16QAM	6	0	20.92	20.92	20.84	22	2
1.4	64QAM	1	0	20.46	20.43	20.35	22	2
1.4	64QAM	1	3	20.55	20.55	20.52		
1.4	64QAM	1	5	20.92	20.94	20.80		
1.4	64QAM	3	0	20.30	20.36	20.33		
1.4	64QAM	3	1	20.49	20.57	20.41		
1.4	64QAM	3	3	20.91	20.90	20.83		
1.4	64QAM	6	0	19.93	19.94	19.94	21	3



<LTE Band 4 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.53	23.55	23.57		
20	QPSK	1	49	23.38	23.46	23.39	24	0
20	QPSK	1	99	23.44	23.39	23.35		
20	QPSK	50	0	22.59	22.66	22.59		
20	QPSK	50	24	22.63	22.57	22.55	23	1
20	QPSK	50	50	22.56	22.57	22.55		
20	QPSK	100	0	22.62	22.64	22.48		
20	16QAM	1	0	22.89	22.85	22.90	23	1
20	16QAM	1	49	22.77	22.82	22.72		
20	16QAM	1	99	22.76	22.70	22.73		
20	16QAM	50	0	21.61	21.67	21.63	22	2
20	16QAM	50	24	21.60	21.60	21.52		
20	16QAM	50	50	21.55	21.58	21.56		
20	16QAM	100	0	21.64	21.60	21.53	22	2
20	64QAM	1	0	21.83	21.82	21.86		
20	64QAM	1	49	21.70	21.62	21.62		
20	64QAM	1	99	21.74	21.67	21.60	21	3
20	64QAM	50	0	20.61	20.65	20.66		
20	64QAM	50	24	20.63	20.59	20.56		
20	64QAM	50	50	20.56	20.56	20.55	21	3
20	64QAM	100	0	20.63	20.58	20.54		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.47	23.51	23.48		
15	QPSK	1	37	23.31	23.40	23.30	24	0
15	QPSK	1	74	23.39	23.37	23.32		
15	QPSK	36	0	22.51	22.66	22.57		
15	QPSK	36	20	22.60	22.49	22.49	23	1
15	QPSK	36	39	22.49	22.47	22.45		
15	QPSK	75	0	22.59	22.56	22.41		
15	16QAM	1	0	22.86	22.78	22.82	23	1
15	16QAM	1	37	22.69	22.75	22.72		
15	16QAM	1	74	22.73	22.68	22.68		
15	16QAM	36	0	21.60	21.60	21.59	22	2
15	16QAM	36	20	21.53	21.53	21.52		
15	16QAM	36	39	21.47	21.58	21.52		
15	16QAM	75	0	21.60	21.57	21.51	22	2
15	64QAM	1	0	21.76	21.78	21.83		
15	64QAM	1	37	21.62	21.59	21.57		
15	64QAM	1	74	21.72	21.67	21.50	21	3
15	64QAM	36	0	20.59	20.59	20.63		
15	64QAM	36	20	20.55	20.52	20.50		
15	64QAM	36	39	20.51	20.49	20.53	21	3
15	64QAM	75	0	20.62	20.57	20.47		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.48	23.51	23.50		
10	QPSK	1	25	23.32	23.46	23.30	24	0
10	QPSK	1	49	23.34	23.37	23.25		
10	QPSK	25	0	22.52	22.60	22.59		
10	QPSK	25	12	22.55	22.47	22.53	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	22.54	22.52	22.55		
10	QPSK	50	0	22.56	22.61	22.46		
10	16QAM	1	0	22.82	22.78	22.87		
10	16QAM	1	25	22.70	22.77	22.68	23	1
10	16QAM	1	49	22.71	22.60	22.69		
10	16QAM	25	0	21.53	21.63	21.58		
10	16QAM	25	12	21.53	21.59	21.44	22	2
10	16QAM	25	25	21.51	21.54	21.53		
10	16QAM	50	0	21.56	21.58	21.44		
10	64QAM	1	0	21.76	21.74	21.79	22	2
10	64QAM	1	25	21.62	21.55	21.53		
10	64QAM	1	49	21.70	21.65	21.58		
10	64QAM	25	0	20.51	20.55	20.66	21	3
10	64QAM	25	12	20.60	20.56	20.52		
10	64QAM	25	25	20.51	20.46	20.51		
10	64QAM	50	0	20.63	20.53	20.44		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.50	23.54	23.55	24	0
5	QPSK	1	12	23.30	23.43	23.34		
5	QPSK	1	24	23.37	23.32	23.27		
5	QPSK	12	0	22.50	22.59	22.51	23	1
5	QPSK	12	7	22.57	22.47	22.46		
5	QPSK	12	13	22.53	22.48	22.52		
5	QPSK	25	0	22.58	22.62	22.41	23	1
5	16QAM	1	0	22.83	22.76	22.84		
5	16QAM	1	12	22.72	22.80	22.70		
5	16QAM	1	24	22.74	22.63	22.67	22	2
5	16QAM	12	0	21.51	21.58	21.63		
5	16QAM	12	7	21.50	21.57	21.48		
5	16QAM	12	13	21.48	21.54	21.53	22	2
5	16QAM	25	0	21.62	21.54	21.44		
5	64QAM	1	0	21.81	21.75	21.80		
5	64QAM	1	12	21.69	21.55	21.55	22	2
5	64QAM	1	24	21.68	21.61	21.59		
5	64QAM	12	0	20.53	20.57	20.57		
5	64QAM	12	7	20.59	20.54	20.54	21	3
5	64QAM	12	13	20.56	20.54	20.48		
5	64QAM	25	0	20.58	20.51	20.48		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.45	23.49	23.56	24	0
3	QPSK	1	8	23.35	23.46	23.29		
3	QPSK	1	14	23.34	23.35	23.34		
3	QPSK	8	0	22.49	22.58	22.54	23	1
3	QPSK	8	4	22.53	22.54	22.51		
3	QPSK	8	7	22.50	22.47	22.53		
3	QPSK	15	0	22.58	22.54	22.45	23	1
3	16QAM	1	0	22.83	22.76	22.87		
3	16QAM	1	8	22.77	22.81	22.71		
3	16QAM	1	14	22.71	22.67	22.64	22	2
3	16QAM	8	0	21.58	21.59	21.59		
3	16QAM	8	4	21.59	21.55	21.42		
3	16QAM	8	7	21.49	21.48	21.49	22	2
3	16QAM	15	0	21.58	21.59	21.51		
3	64QAM	1	0	21.77	21.74	21.83	22	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	21.60	21.57	21.61	21	3
3	64QAM	1	14	21.70	21.59	21.57		
3	64QAM	8	0	20.51	20.57	20.59		
3	64QAM	8	4	20.56	20.58	20.52		
3	64QAM	8	7	20.53	20.51	20.52		
3	64QAM	15	0	20.58	20.56	20.50		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.50	23.50	23.53	24	0
1.4	QPSK	1	3	23.35	23.37	23.30		
1.4	QPSK	1	5	23.42	23.32	23.33		
1.4	QPSK	3	0	23.52	23.46	23.50		
1.4	QPSK	3	1	23.29	23.39	23.32		
1.4	QPSK	3	3	23.36	23.39	23.30		
1.4	QPSK	6	0	22.57	22.59	22.39	23	1
1.4	16QAM	1	0	22.87	22.85	22.81	23	1
1.4	16QAM	1	3	22.67	22.78	22.72		
1.4	16QAM	1	5	22.76	22.67	22.71		
1.4	16QAM	3	0	22.80	22.81	22.88		
1.4	16QAM	3	1	22.77	22.75	22.66		
1.4	16QAM	3	3	22.73	22.66	22.67		
1.4	16QAM	6	0	21.56	21.56	21.43	22	2
1.4	64QAM	1	0	21.82	21.81	21.82	22	2
1.4	64QAM	1	3	21.60	21.62	21.62		
1.4	64QAM	1	5	21.74	21.63	21.60		
1.4	64QAM	3	0	21.79	21.73	21.83		
1.4	64QAM	3	1	21.63	21.58	21.54		
1.4	64QAM	3	3	21.71	21.65	21.58		
1.4	64QAM	6	0	20.57	20.56	20.51	21	3



<LTE Band 5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.67	23.74	23.81	24.5	0
10	QPSK	1	25	23.59	23.73	23.74		
10	QPSK	1	49	23.65	23.73	23.72		
10	QPSK	25	0	22.73	22.90	22.85	23.5	1
10	QPSK	25	12	22.73	22.88	22.86		
10	QPSK	25	25	22.81	22.89	22.89		
10	QPSK	50	0	22.83	22.83	22.83	23.5	1
10	16QAM	1	0	23.07	23.13	23.24		
10	16QAM	1	25	23.01	23.16	23.15		
10	16QAM	1	49	23.13	23.14	23.13	22.5	2
10	16QAM	25	0	21.70	21.82	21.83		
10	16QAM	25	12	21.81	21.86	21.94		
10	16QAM	25	25	21.80	21.90	21.93	22.5	2
10	16QAM	50	0	21.82	21.85	21.84		
10	64QAM	1	0	21.84	21.91	22.06		
10	64QAM	1	25	21.97	22.13	22.05	22.5	2
10	64QAM	1	49	21.99	22.07	21.72		
10	64QAM	25	0	20.76	20.89	20.89		
10	64QAM	25	12	20.90	20.94	20.97	21.5	3
10	64QAM	25	25	20.83	20.91	20.91		
10	64QAM	50	0	20.86	20.88	20.87		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.64	23.69	23.79	24.5	0
5	QPSK	1	12	23.58	23.67	23.66		
5	QPSK	1	24	23.55	23.69	23.63		
5	QPSK	12	0	22.70	22.83	22.78	23.5	1
5	QPSK	12	7	22.82	22.88	22.89		
5	QPSK	12	13	22.71	22.88	22.83		
5	QPSK	25	0	22.73	22.79	22.80	23.5	1
5	16QAM	1	0	23.02	23.10	23.20		
5	16QAM	1	12	22.94	23.10	23.14		
5	16QAM	1	24	23.11	23.09	23.11	22.5	2
5	16QAM	12	0	21.62	21.75	21.78		
5	16QAM	12	7	21.79	21.81	21.86		
5	16QAM	12	13	21.72	21.86	21.93	22.5	2
5	16QAM	25	0	21.72	21.80	21.79		
5	64QAM	1	0	21.78	21.89	22.04		
5	64QAM	1	12	21.90	22.06	22.00	22.5	2
5	64QAM	1	24	21.92	22.04	21.66		
5	64QAM	12	0	20.69	20.79	20.86		
5	64QAM	12	7	20.83	20.91	20.90	21.5	3
5	64QAM	12	13	20.75	20.88	20.84		
5	64QAM	25	0	20.78	20.82	20.84		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.62	23.70	23.75	24.5	0
3	QPSK	1	8	23.53	23.70	23.73		
3	QPSK	1	14	23.64	23.73	23.63		
3	QPSK	8	0	22.69	22.76	22.75	23.5	1
3	QPSK	8	4	22.80	22.88	22.92		



FCC SAR TEST REPORT

Report No. : FA092423

3	QPSK	8	7	22.79	22.79	22.85		
3	QPSK	15	0	22.75	22.74	22.76		
3	16QAM	1	0	23.04	23.03	23.22		
3	16QAM	1	8	22.92	23.13	23.12	23.5	1
3	16QAM	1	14	23.12	23.11	23.08		
3	16QAM	8	0	21.68	21.78	21.76		
3	16QAM	8	4	21.72	21.80	21.84	22.5	2
3	16QAM	8	7	21.70	21.90	21.91		
3	16QAM	15	0	21.77	21.75	21.79		
3	64QAM	1	0	21.81	21.84	22.05	22.5	2
3	64QAM	1	8	21.91	22.04	22.03		
3	64QAM	1	14	21.97	22.05	21.68		
3	64QAM	8	0	20.73	20.86	20.84	21.5	3
3	64QAM	8	4	20.89	20.90	20.92		
3	64QAM	8	7	20.73	20.83	20.89		
3	64QAM	15	0	20.81	20.82	20.79		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.62	23.66	23.74	24.5	0
1.4	QPSK	1	3	23.58	23.64	23.64		
1.4	QPSK	1	5	23.56	23.64	23.62		
1.4	QPSK	3	0	23.65	23.71	23.71		
1.4	QPSK	3	1	23.53	23.70	23.67		
1.4	QPSK	3	3	23.62	23.66	23.63		
1.4	QPSK	6	0	22.74	22.83	22.78	23.5	1
1.4	16QAM	1	0	23.07	23.08	23.21	23.5	1
1.4	16QAM	1	3	22.96	23.10	23.14		
1.4	16QAM	1	5	23.08	23.08	23.12		
1.4	16QAM	3	0	23.07	23.12	23.24		
1.4	16QAM	3	1	22.97	23.06	23.08		
1.4	16QAM	3	3	23.05	23.14	23.07		
1.4	16QAM	6	0	21.80	21.84	21.79	22.5	2
1.4	64QAM	1	0	21.84	21.90	21.99	22.5	2
1.4	64QAM	1	3	21.93	22.12	21.96		
1.4	64QAM	1	5	21.94	22.00	21.65		
1.4	64QAM	3	0	21.74	21.87	22.02		
1.4	64QAM	3	1	21.95	22.07	21.98		
1.4	64QAM	3	3	21.93	22.06	21.69		
1.4	64QAM	6	0	20.84	20.84	20.83	21.5	3



<LTE Band 7 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.67	23.88	23.77		
20	QPSK	1	49	23.65	23.82	23.76	24	0
20	QPSK	1	99	23.61	23.81	23.74		
20	QPSK	50	0	22.47	22.57	22.56		
20	QPSK	50	24	22.57	22.61	22.57	23	1
20	QPSK	50	50	22.59	22.62	22.59		
20	QPSK	100	0	22.60	22.66	22.58		
20	16QAM	1	0	22.67	22.83	22.78	23	1
20	16QAM	1	49	22.81	22.83	22.81		
20	16QAM	1	99	22.85	22.86	22.77		
20	16QAM	50	0	21.47	21.58	21.58	22	2
20	16QAM	50	24	21.60	21.63	21.58		
20	16QAM	50	50	21.60	21.62	21.59		
20	16QAM	100	0	21.58	21.62	21.57	22	2
20	64QAM	1	0	21.57	21.57	21.73		
20	64QAM	1	49	21.70	21.61	21.48		
20	64QAM	1	99	21.68	21.76	21.46	21	3
20	64QAM	50	0	20.50	20.49	20.60		
20	64QAM	50	24	20.63	20.62	20.43		
20	64QAM	50	50	20.62	20.62	20.28	21	3
20	64QAM	100	0	20.61	20.62	20.37		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.67	23.83	23.74		
15	QPSK	1	37	23.69	23.77	23.66	24	0
15	QPSK	1	74	23.71	23.80	23.75		
15	QPSK	36	0	22.43	22.51	22.47		
15	QPSK	36	20	22.50	22.51	22.47	23	1
15	QPSK	36	39	22.57	22.56	22.47		
15	QPSK	75	0	22.51	22.50	22.48		
15	16QAM	1	0	22.67	22.76	22.76	23	1
15	16QAM	1	37	22.76	22.83	22.73		
15	16QAM	1	74	22.77	22.76	22.71		
15	16QAM	36	0	21.44	21.58	21.58	22	2
15	16QAM	36	20	21.58	21.61	21.53		
15	16QAM	36	39	21.56	21.57	21.55		
15	16QAM	75	0	21.53	21.53	21.49	22	2
15	64QAM	1	0	21.47	21.50	21.70		
15	64QAM	1	37	21.60	21.56	21.42		
15	64QAM	1	74	21.67	21.67	21.36	21	3
15	64QAM	36	0	20.44	20.49	20.60		
15	64QAM	36	20	20.63	20.62	20.42		
15	64QAM	36	39	20.61	20.60	20.25	21	3
15	64QAM	75	0	20.60	20.53	20.30		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.66	23.84	23.70		
10	QPSK	1	25	23.65	23.74	23.74	24	0
10	QPSK	1	49	23.71	23.71	23.70		
10	QPSK	25	0	22.37	22.56	22.47		
10	QPSK	25	12	22.54	22.52	22.53	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	22.55	22.53	22.55		
10	QPSK	50	0	22.58	22.48	22.48		
10	16QAM	1	0	22.62	22.82	22.78		
10	16QAM	1	25	22.74	22.83	22.74	23	1
10	16QAM	1	49	22.83	22.84	22.76		
10	16QAM	25	0	21.44	21.54	21.49		
10	16QAM	25	12	21.50	21.58	21.57	22	2
10	16QAM	25	25	21.58	21.59	21.58		
10	16QAM	50	0	21.58	21.58	21.51		
10	64QAM	1	0	21.56	21.49	21.67	22	2
10	64QAM	1	25	21.61	21.53	21.40		
10	64QAM	1	49	21.61	21.70	21.40		
10	64QAM	25	0	20.44	20.47	20.56	21	3
10	64QAM	25	12	20.57	20.60	20.34		
10	64QAM	25	25	20.53	20.54	20.23		
10	64QAM	50	0	20.55	20.52	20.28		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.58	23.81	23.67	24	0
5	QPSK	1	12	23.72	23.74	23.69		
5	QPSK	1	24	23.74	23.77	23.71		
5	QPSK	12	0	22.47	22.52	22.49	23	1
5	QPSK	12	7	22.57	22.56	22.51		
5	QPSK	12	13	22.57	22.52	22.54		
5	QPSK	25	0	22.55	22.48	22.58	23	1
5	16QAM	1	0	22.66	22.83	22.77		
5	16QAM	1	12	22.71	22.76	22.72		
5	16QAM	1	24	22.80	22.82	22.69	22	2
5	16QAM	12	0	21.37	21.51	21.53		
5	16QAM	12	7	21.58	21.56	21.48		
5	16QAM	12	13	21.58	21.57	21.59	22	2
5	16QAM	25	0	21.49	21.52	21.54		
5	64QAM	1	0	21.53	21.56	21.71		
5	64QAM	1	12	21.60	21.57	21.46	22	2
5	64QAM	1	24	21.65	21.70	21.37		
5	64QAM	12	0	20.42	20.41	20.51		
5	64QAM	12	7	20.61	20.60	20.42	21	3
5	64QAM	12	13	20.54	20.56	20.20		
5	64QAM	25	0	20.56	20.57	20.30		



<LTE Band 7 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.70	22.80	22.79		
20	QPSK	1	49	22.69	22.77	22.67	24	0
20	QPSK	1	99	22.65	22.70	22.62		
20	QPSK	50	0	22.07	22.10	22.08		
20	QPSK	50	24	22.00	22.09	22.04	23	1
20	QPSK	50	50	22.08	22.08	22.06		
20	QPSK	100	0	22.00	22.08	22.02		
20	16QAM	1	0	22.15	22.20	22.10	23	1
20	16QAM	1	49	22.20	22.20	22.12		
20	16QAM	1	99	22.10	22.10	22.03		
20	16QAM	50	0	21.12	21.20	21.10	22	2
20	16QAM	50	24	21.18	21.20	21.16		
20	16QAM	50	50	21.07	21.10	21.09		
20	16QAM	100	0	21.07	21.10	21.01	22	2
20	64QAM	1	0	20.70	20.80	20.78		
20	64QAM	1	49	20.96	21.00	20.90		
20	64QAM	1	99	20.85	20.90	20.82	21	3
20	64QAM	50	0	20.01	20.10	20.02		
20	64QAM	50	24	20.03	20.10	20.09		
20	64QAM	50	50	20.02	20.10	20.02	21	3
20	64QAM	100	0	20.01	20.09	20.04		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.62	22.76	22.57		
15	QPSK	1	37	22.63	22.70	22.63	24	0
15	QPSK	1	74	22.60	22.69	22.54		
15	QPSK	36	0	22.02	22.04	22.08		
15	QPSK	36	20	21.91	22.04	22.04	23	1
15	QPSK	36	39	22.04	22.00	22.04		
15	QPSK	75	0	21.98	21.99	21.92		
15	16QAM	1	0	22.05	22.18	22.03	23	1
15	16QAM	1	37	22.13	22.20	22.04		
15	16QAM	1	74	22.04	22.09	22.00		
15	16QAM	36	0	21.11	21.13	21.02	22	2
15	16QAM	36	20	21.16	21.18	21.09		
15	16QAM	36	39	21.01	21.03	21.04		
15	16QAM	75	0	21.02	21.08	20.97	22	2
15	64QAM	1	0	20.64	20.73	20.72		
15	64QAM	1	37	20.87	20.95	20.82		
15	64QAM	1	74	20.81	20.88	20.82	21	3
15	64QAM	36	0	19.99	20.10	19.97		
15	64QAM	36	20	20.03	20.05	20.07		
15	64QAM	36	39	19.97	20.06	20.00	21	3
15	64QAM	75	0	19.93	20.06	20.02		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.60	22.75	22.59		
10	QPSK	1	25	22.69	22.71	22.62	24	0
10	QPSK	1	49	22.57	22.63	22.54		
10	QPSK	25	0	22.02	22.07	22.04		
10	QPSK	25	12	21.95	22.03	21.96	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	21.98	22.01	22.06		
10	QPSK	50	0	21.99	22.01	21.97		
10	16QAM	1	0	22.07	22.11	22.01		
10	16QAM	1	25	22.10	22.17	22.04	23	1
10	16QAM	1	49	22.06	22.01	21.94		
10	16QAM	25	0	21.04	21.17	21.07		
10	16QAM	25	12	21.11	21.12	21.06	22	2
10	16QAM	25	25	20.97	21.04	21.06		
10	16QAM	50	0	21.07	21.05	20.96		
10	64QAM	1	0	20.67	20.71	20.78	22	2
10	64QAM	1	25	20.92	20.93	20.89		
10	64QAM	1	49	20.84	20.85	20.72		
10	64QAM	25	0	19.93	20.02	19.99	21	3
10	64QAM	25	12	19.96	20.10	20.09		
10	64QAM	25	25	19.97	20.07	19.98		
10	64QAM	50	0	19.95	20.08	19.96		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.64	22.70	22.57	24	0
5	QPSK	1	12	22.64	22.75	22.61		
5	QPSK	1	24	22.59	22.67	22.53		
5	QPSK	12	0	22.03	22.10	21.99	23	1
5	QPSK	12	7	21.91	22.07	21.96		
5	QPSK	12	13	22.07	22.06	21.96		
5	QPSK	25	0	21.90	22.06	22.00	23	1
5	16QAM	1	0	22.09	22.15	22.04		
5	16QAM	1	12	22.13	22.17	22.08		
5	16QAM	1	24	22.05	22.10	21.93	22	2
5	16QAM	12	0	21.10	21.11	21.06		
5	16QAM	12	7	21.11	21.19	21.10		
5	16QAM	12	13	21.05	21.09	21.03	22	2
5	16QAM	25	0	21.07	21.08	20.96		
5	64QAM	1	0	20.61	20.79	20.73		
5	64QAM	1	12	20.90	20.92	20.81	22	2
5	64QAM	1	24	20.82	20.90	20.75		
5	64QAM	12	0	19.94	20.00	20.01		
5	64QAM	12	7	19.97	20.02	20.06	21	3
5	64QAM	12	13	19.98	20.08	19.96		
5	64QAM	25	0	19.94	20.01	19.99		



<LTE Band 12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24.5	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.83	23.81	23.81		
10	QPSK	1	25	23.81	23.80	23.73	23.5	1
10	QPSK	1	49	23.79	23.77	23.67		
10	QPSK	25	0	22.96	22.94	22.92		
10	QPSK	25	12	23.03	22.93	22.94	23.5	1
10	QPSK	25	25	22.98	22.91	22.77		
10	QPSK	50	0	23.02	22.95	22.92		
10	16QAM	1	0	23.23	23.17	23.18	23.5	1
10	16QAM	1	25	23.21	23.24	23.13		
10	16QAM	1	49	23.22	23.14	23.05		
10	16QAM	25	0	21.95	21.92	21.95	22.5	2
10	16QAM	25	12	22.02	21.97	21.92		
10	16QAM	25	25	21.99	21.88	21.82		
10	16QAM	50	0	22.04	21.94	21.91	22.5	2
10	64QAM	1	0	22.04	21.99	22.08		
10	64QAM	1	25	21.50	22.14	21.99		
10	64QAM	1	49	22.07	22.00	21.92	21.5	3
10	64QAM	25	0	20.78	20.97	20.98		
10	64QAM	25	12	20.96	21.02	20.95		
10	64QAM	25	25	21.02	20.92	20.80	21.5	3
10	64QAM	50	0	21.06	20.99	20.92		
Channel				23035	23095	23155	24.5	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.73	23.74	23.73		
5	QPSK	1	12	23.73	23.78	23.66	23.5	1
5	QPSK	1	24	23.69	23.70	23.64		
5	QPSK	12	0	22.92	22.91	22.89		
5	QPSK	12	7	22.95	22.94	22.90	23.5	1
5	QPSK	12	13	22.97	22.91	22.67		
5	QPSK	25	0	22.99	22.95	22.85		
5	16QAM	1	0	23.18	23.13	23.11	23.5	1
5	16QAM	1	12	23.16	23.20	23.10		
5	16QAM	1	24	23.13	23.04	22.95		
5	16QAM	12	0	21.92	21.86	21.94	22.5	2
5	16QAM	12	7	21.93	21.94	21.83		
5	16QAM	12	13	21.97	21.86	21.73		
5	16QAM	25	0	22.04	21.91	21.89	22.5	2
5	64QAM	1	0	21.99	21.98	22.07		
5	64QAM	1	12	21.43	22.13	21.96		
5	64QAM	1	24	22.02	21.96	21.85	21.5	3
5	64QAM	12	0	20.78	20.97	20.93		
5	64QAM	12	7	20.92	20.94	20.95		
5	64QAM	12	13	20.94	20.91	20.70	21.5	3
5	64QAM	25	0	21.06	20.90	20.90		
Channel				23025	23095	23165	24.5	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.74	23.80	23.80		
3	QPSK	1	8	23.71	23.76	23.64	24.5	0
3	QPSK	1	14	23.75	23.70	23.66		
3	QPSK	8	0	22.94	22.93	22.86		
3	QPSK	8	4	22.97	22.92	22.92	23.5	1



FCC SAR TEST REPORT

Report No. : FA092423

3	QPSK	8	7	22.89	22.87	22.70		
3	QPSK	15	0	22.95	22.86	22.83		
3	16QAM	1	0	23.14	23.09	23.08		
3	16QAM	1	8	23.18	23.20	23.04	23.5	1
3	16QAM	1	14	23.20	23.13	22.96		
3	16QAM	8	0	21.95	21.91	21.95		
3	16QAM	8	4	21.92	21.92	21.87	22.5	2
3	16QAM	8	7	21.91	21.83	21.82		
3	16QAM	15	0	22.04	21.92	21.91		
3	64QAM	1	0	21.94	21.95	21.99	22.5	2
3	64QAM	1	8	21.50	22.12	21.99		
3	64QAM	1	14	22.02	21.97	21.91		
3	64QAM	8	0	20.74	20.93	20.91	21.5	3
3	64QAM	8	4	20.96	20.97	20.93		
3	64QAM	8	7	20.93	20.82	20.80		
3	64QAM	15	0	20.98	20.95	20.82		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.73	23.75	23.73	24.5	0
1.4	QPSK	1	3	23.75	23.73	23.72		
1.4	QPSK	1	5	23.75	23.69	23.63		
1.4	QPSK	3	0	23.78	23.74	23.71		
1.4	QPSK	3	1	23.75	23.81	23.68		
1.4	QPSK	3	3	23.77	23.77	23.66		
1.4	QPSK	6	0	22.98	22.95	22.84	23.5	1
1.4	16QAM	1	0	23.17	23.08	23.13	23.5	1
1.4	16QAM	1	3	23.11	23.18	23.04		
1.4	16QAM	1	5	23.16	23.04	23.00		
1.4	16QAM	3	0	23.22	23.10	23.16		
1.4	16QAM	3	1	23.19	23.18	23.08		
1.4	16QAM	3	3	23.18	23.11	23.02		
1.4	16QAM	6	0	21.95	21.87	21.85	22.5	2
1.4	64QAM	1	0	22.04	21.92	22.07	22.5	2
1.4	64QAM	1	3	21.50	22.13	21.95		
1.4	64QAM	1	5	22.00	21.98	21.87		
1.4	64QAM	3	0	22.04	21.92	22.06		
1.4	64QAM	3	1	21.46	22.10	21.90		
1.4	64QAM	3	3	22.00	21.94	21.92		
1.4	64QAM	6	0	20.97	20.91	20.86	21.5	3

<LTE Band 13 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.66		24.5	0
10	QPSK	1	25		23.60			
10	QPSK	1	49		23.56			
10	QPSK	25	0		22.65		23.5	1
10	QPSK	25	12		22.63			
10	QPSK	25	25		22.59			
10	QPSK	50	0		22.64		23.5	1
10	16QAM	1	0		22.88			
10	16QAM	1	25		22.92			
10	16QAM	1	49		22.92		22.5	2
10	16QAM	25	0		21.69			
10	16QAM	25	12		21.69			
10	16QAM	25	25		21.68		22.5	2
10	16QAM	50	0		21.73			
10	64QAM	1	0		21.73			
10	64QAM	1	25		21.85		22.5	2
10	64QAM	1	49		21.95			
10	64QAM	25	0		20.68			
10	64QAM	25	12		20.72		21.5	3
10	64QAM	25	25		20.77			
10	64QAM	50	0		20.71			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.59	23.62	23.65	24.5	0
5	QPSK	1	12	23.59	23.59	23.56		
5	QPSK	1	24	23.48	23.52	23.54		
5	QPSK	12	0	22.57	22.57	22.57	23.5	1
5	QPSK	12	7	22.54	22.60	22.53		
5	QPSK	12	13	22.64	22.69	22.62		
5	QPSK	25	0	22.56	22.56	22.61	23.5	1
5	16QAM	1	0	22.88	22.88	22.79		
5	16QAM	1	12	22.84	22.88	22.91		
5	16QAM	1	24	22.90	22.85	22.85	22.5	2
5	16QAM	12	0	21.60	21.65	21.63		
5	16QAM	12	7	21.65	21.63	21.62		
5	16QAM	12	13	21.63	21.63	21.65	22.5	2
5	16QAM	25	0	21.63	21.68	21.73		
5	64QAM	1	0	21.71	21.64	21.67		
5	64QAM	1	12	21.77	21.84	21.81	22.5	2
5	64QAM	1	24	21.92	21.87	21.92		
5	64QAM	12	0	20.58	20.58	20.61		
5	64QAM	12	7	20.72	20.69	20.71	21.5	3
5	64QAM	12	13	20.72	20.74	20.73		
5	64QAM	25	0	20.66	20.65	20.69		



<LTE Band 14 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		23.68		24.5	0
10	QPSK	1	25		23.59			
10	QPSK	1	49		23.56			
10	QPSK	25	0		22.66		23.5	1
10	QPSK	25	12		22.65			
10	QPSK	25	25		22.61			
10	QPSK	50	0		22.64		23.5	1
10	16QAM	1	0		23.11			
10	16QAM	1	25		23.02			
10	16QAM	1	49		22.91		22.5	2
10	16QAM	25	0		21.63			
10	16QAM	25	12		21.65			
10	16QAM	25	25		21.73		22.5	2
10	16QAM	50	0		21.66			
10	64QAM	1	0		21.91			
10	64QAM	1	25		21.93		22.5	2
10	64QAM	1	49		21.88			
10	64QAM	25	0		20.70			
10	64QAM	25	12		20.70		21.5	3
10	64QAM	25	25		20.71			
10	64QAM	50	0		20.70			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	23.66	23.65	23.61	24.5	0
5	QPSK	1	12	23.52	23.56	23.56		
5	QPSK	1	24	23.50	23.50	23.50		
5	QPSK	12	0	22.65	22.60	22.63	23.5	1
5	QPSK	12	7	22.58	22.60	22.58		
5	QPSK	12	13	22.62	22.71	22.63		
5	QPSK	25	0	22.54	22.63	22.55	23.5	1
5	16QAM	1	0	23.01	23.09	23.08		
5	16QAM	1	12	22.99	22.97	22.92		
5	16QAM	1	24	22.90	22.83	22.82	22.5	2
5	16QAM	12	0	21.59	21.62	21.56		
5	16QAM	12	7	21.63	21.58	21.65		
5	16QAM	12	13	21.64	21.71	21.69	22.5	2
5	16QAM	25	0	21.60	21.56	21.64		
5	64QAM	1	0	21.81	21.85	21.88		
5	64QAM	1	12	21.83	21.90	21.86	22.5	2
5	64QAM	1	24	21.83	21.84	21.81		
5	64QAM	12	0	20.63	20.66	20.68		
5	64QAM	12	7	20.69	20.68	20.68	21.5	3
5	64QAM	12	13	20.66	20.68	20.63		
5	64QAM	25	0	20.61	20.61	20.62		

<LTE Band 17 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24.5	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.76	23.73	23.79		
10	QPSK	1	25	23.68	23.64	23.64	23.5	1
10	QPSK	1	49	23.66	23.63	23.61		
10	QPSK	25	0	22.81	22.89	22.78		
10	QPSK	25	12	22.88	22.86	22.77	23.5	1
10	QPSK	25	25	22.79	22.79	22.76		
10	QPSK	50	0	22.79	22.76	22.76		
10	16QAM	1	0	23.13	23.12	23.11	23.5	1
10	16QAM	1	25	23.09	23.06	23.05		
10	16QAM	1	49	23.02	23.02	22.99		
10	16QAM	25	0	21.82	21.83	21.79	22.5	2
10	16QAM	25	12	21.90	21.85	21.76		
10	16QAM	25	25	21.82	21.78	21.70		
10	16QAM	50	0	21.77	21.73	21.69	22.5	2
10	64QAM	1	0	21.99	21.99	21.98		
10	64QAM	1	25	22.01	22.01	21.95		
10	64QAM	1	49	21.85	21.89	21.82	21.5	3
10	64QAM	25	0	20.87	20.84	20.83		
10	64QAM	25	12	20.90	20.90	20.81		
10	64QAM	25	25	20.80	20.77	20.81	21.5	3
10	64QAM	50	0	20.78	20.79	20.74		
Channel				23755	23790	23825	24.5	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.70	23.69	23.70		
5	QPSK	1	12	23.62	23.61	23.62	23.5	1
5	QPSK	1	24	23.63	23.54	23.59		
5	QPSK	12	0	22.81	22.73	22.76		
5	QPSK	12	7	22.87	22.86	22.72	23.5	1
5	QPSK	12	13	22.72	22.76	22.76		
5	QPSK	25	0	22.71	22.68	22.70		
5	16QAM	1	0	23.07	23.11	23.07	23.5	1
5	16QAM	1	12	23.03	23.05	23.01		
5	16QAM	1	24	23.00	22.95	22.96		
5	16QAM	12	0	21.73	21.74	21.74	22.5	2
5	16QAM	12	7	21.89	21.83	21.75		
5	16QAM	12	13	21.75	21.76	21.67		
5	16QAM	25	0	21.73	21.73	21.61	22.5	2
5	64QAM	1	0	21.96	21.98	21.97		
5	64QAM	1	12	21.91	22.01	21.88		
5	64QAM	1	24	21.77	21.88	21.77	21.5	3
5	64QAM	12	0	20.78	20.82	20.80		
5	64QAM	12	7	20.81	20.82	20.75		
5	64QAM	12	13	20.80	20.77	20.72	21.5	3
5	64QAM	25	0	20.74	20.71	20.73		



<LTE Band 25 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.51	23.44	23.67	24	0
20	QPSK	1	49	23.48	23.37	23.33		
20	QPSK	1	99	23.39	23.28	23.27		
20	QPSK	50	0	22.55	22.56	22.73	23	1
20	QPSK	50	24	22.50	22.48	22.63		
20	QPSK	50	50	22.45	22.47	22.67		
20	QPSK	100	0	22.52	22.49	22.74	23	1
20	16QAM	1	0	22.92	22.75	22.65		
20	16QAM	1	49	22.83	22.78	22.63		
20	16QAM	1	99	22.82	22.71	22.61	22	2
20	16QAM	50	0	21.73	21.50	21.46		
20	16QAM	50	24	21.71	21.57	21.48		
20	16QAM	50	50	21.63	21.51	21.45	22	2
20	16QAM	100	0	21.65	21.55	21.50		
20	64QAM	1	0	21.88	21.79	21.17	22	2
20	64QAM	1	49	21.70	21.59	21.55		
20	64QAM	1	99	21.49	21.52	21.09		
20	64QAM	50	0	20.75	20.53	20.29	21	3
20	64QAM	50	24	20.73	20.60	20.53		
20	64QAM	50	50	20.43	20.53	20.49		
20	64QAM	100	0	20.67	20.53	20.22		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.63	23.38	23.34	24	0
15	QPSK	1	37	23.50	23.35	23.23		
15	QPSK	1	74	23.37	23.27	23.26		
15	QPSK	36	0	22.66	22.45	22.36	23	1
15	QPSK	36	20	22.64	22.53	22.45		
15	QPSK	36	39	22.62	22.41	22.38		
15	QPSK	75	0	22.72	22.46	22.43	23	1
15	16QAM	1	0	22.90	22.70	22.64		
15	16QAM	1	37	22.83	22.70	22.61		
15	16QAM	1	74	22.76	22.67	22.56	22	2
15	16QAM	36	0	21.70	21.47	21.41		
15	16QAM	36	20	21.63	21.53	21.38		
15	16QAM	36	39	21.62	21.43	21.35	22	2
15	16QAM	75	0	21.58	21.53	21.46		
15	64QAM	1	0	21.84	21.73	21.10		
15	64QAM	1	37	21.69	21.51	21.53	22	2
15	64QAM	1	74	21.40	21.49	21.07		
15	64QAM	36	0	20.71	20.51	20.29	21	3
15	64QAM	36	20	20.71	20.56	20.52		
15	64QAM	36	39	20.39	20.48	20.47		
15	64QAM	75	0	20.58	20.44	20.15		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	23.61	23.41	23.35	24	0
10	QPSK	1	25	23.47	23.33	23.24		
10	QPSK	1	49	23.35	23.28	23.18		
10	QPSK	25	0	22.67	22.42	22.38	23	1
10	QPSK	25	12	22.60	22.54	22.48		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	22.57	22.38	22.38		
10	QPSK	50	0	22.74	22.45	22.42		
10	16QAM	1	0	22.83	22.65	22.55		
10	16QAM	1	25	22.78	22.74	22.59	23	1
10	16QAM	1	49	22.72	22.64	22.55		
10	16QAM	25	0	21.65	21.41	21.37		
10	16QAM	25	12	21.68	21.54	21.38	22	2
10	16QAM	25	25	21.62	21.46	21.36		
10	16QAM	50	0	21.62	21.49	21.42		
10	64QAM	1	0	21.87	21.70	21.12	22	2
10	64QAM	1	25	21.64	21.54	21.46		
10	64QAM	1	49	21.42	21.52	21.02		
10	64QAM	25	0	20.69	20.52	20.21	21	3
10	64QAM	25	12	20.66	20.58	20.44		
10	64QAM	25	25	20.34	20.50	20.46		
10	64QAM	50	0	20.62	20.49	20.16		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.59	23.42	23.35	24	0
5	QPSK	1	12	23.45	23.36	23.26		
5	QPSK	1	24	23.39	23.22	23.27		
5	QPSK	12	0	22.70	22.48	22.43	23	1
5	QPSK	12	7	22.70	22.55	22.49		
5	QPSK	12	13	22.57	22.45	22.42		
5	QPSK	25	0	22.71	22.46	22.50	23	1
5	16QAM	1	0	22.86	22.72	22.55		
5	16QAM	1	12	22.83	22.74	22.62		
5	16QAM	1	24	22.77	22.66	22.53	22	2
5	16QAM	12	0	21.65	21.49	21.43		
5	16QAM	12	7	21.63	21.52	21.38		
5	16QAM	12	13	21.55	21.51	21.45	22	2
5	16QAM	25	0	21.64	21.53	21.42		
5	64QAM	1	0	21.83	21.70	21.12		
5	64QAM	1	12	21.65	21.58	21.52	22	2
5	64QAM	1	24	21.39	21.44	21.00		
5	64QAM	12	0	20.72	20.44	20.23		
5	64QAM	12	7	20.70	20.54	20.50	21	3
5	64QAM	12	13	20.36	20.45	20.47		
5	64QAM	25	0	20.67	20.43	20.12		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.62	23.38	23.32	24	0
3	QPSK	1	8	23.43	23.30	23.25		
3	QPSK	1	14	23.37	23.28	23.26		
3	QPSK	8	0	22.66	22.47	22.34	23	1
3	QPSK	8	4	22.69	22.46	22.51		
3	QPSK	8	7	22.55	22.43	22.37		
3	QPSK	15	0	22.65	22.42	22.44	23	1
3	16QAM	1	0	22.87	22.73	22.55		
3	16QAM	1	8	22.81	22.68	22.55		
3	16QAM	1	14	22.80	22.65	22.60	22	2
3	16QAM	8	0	21.63	21.48	21.46		
3	16QAM	8	4	21.67	21.49	21.41		
3	16QAM	8	7	21.60	21.49	21.44	22	2
3	16QAM	15	0	21.60	21.54	21.44		
3	64QAM	1	0	21.85	21.75	21.16	22	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	21.67	21.50	21.54	21	3
3	64QAM	1	14	21.39	21.46	21.04		
3	64QAM	8	0	20.75	20.45	20.29		
3	64QAM	8	4	20.63	20.55	20.48		
3	64QAM	8	7	20.42	20.47	20.49		
3	64QAM	15	0	20.64	20.53	20.22		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.58	23.35	23.38	24	0
1.4	QPSK	1	3	23.44	23.33	23.24		
1.4	QPSK	1	5	23.29	23.22	23.18		
1.4	QPSK	3	0	23.64	23.40	23.39		
1.4	QPSK	3	1	23.44	23.28	23.30		
1.4	QPSK	3	3	23.30	23.19	23.17		
1.4	QPSK	6	0	22.70	22.41	22.50	23	1
1.4	16QAM	1	0	22.86	22.73	22.60	23	1
1.4	16QAM	1	3	22.80	22.78	22.59		
1.4	16QAM	1	5	22.73	22.65	22.53		
1.4	16QAM	3	0	22.87	22.71	22.60		
1.4	16QAM	3	1	22.79	22.71	22.61		
1.4	16QAM	3	3	22.81	22.68	22.61		
1.4	16QAM	6	0	21.65	21.50	21.47	22	2
1.4	64QAM	1	0	21.81	21.69	21.13	22	2
1.4	64QAM	1	3	21.65	21.50	21.53		
1.4	64QAM	1	5	21.48	21.49	21.08		
1.4	64QAM	3	0	21.80	21.77	21.14		
1.4	64QAM	3	1	21.64	21.49	21.52		
1.4	64QAM	3	3	21.46	21.50	21.03		
1.4	64QAM	6	0	20.62	20.51	20.16	21	3



<LTE Band 26 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	24.5	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.79	23.87	23.97		
15	QPSK	1	37	23.85	23.74	23.87	23.5	1
15	QPSK	1	74	23.91	23.80	23.79		
15	QPSK	36	0	22.98	22.89	22.92		
15	QPSK	36	20	23.02	22.88	23.04	23.5	1
15	QPSK	36	39	22.96	22.88	23.02		
15	QPSK	75	0	23.01	22.94	22.94		
15	16QAM	1	0	23.24	23.11	23.09	23.5	1
15	16QAM	1	37	23.14	23.08	23.15		
15	16QAM	1	74	23.19	23.24	23.04		
15	16QAM	36	0	21.94	21.91	21.92	22.5	2
15	16QAM	36	20	21.98	21.94	22.01		
15	16QAM	36	39	21.96	21.97	21.99		
15	16QAM	75	0	21.97	21.96	21.96	22.5	2
15	64QAM	1	0	22.07	21.95	22.02		
15	64QAM	1	37	22.00	22.03	22.04		
15	64QAM	1	74	22.03	22.10	20.97	21.5	3
15	64QAM	36	0	21.00	20.94	20.98		
15	64QAM	36	20	21.00	20.99	21.05		
15	64QAM	36	39	20.94	21.05	21.08	21.5	3
15	64QAM	36	75	20.99	20.97	21.00		
Channel				26740	26865	26990	24.5	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.93	23.78	23.72		
10	QPSK	1	25	23.76	23.65	23.85	23.5	1
10	QPSK	1	49	23.85	23.84	23.78		
10	QPSK	25	0	22.97	22.89	22.90		
10	QPSK	25	12	22.99	22.92	23.04	23.5	1
10	QPSK	25	25	22.96	22.94	23.01		
10	QPSK	50	0	22.97	22.90	22.87		
10	16QAM	1	0	23.24	23.05	23.08	23.5	1
10	16QAM	1	25	23.11	23.00	23.12		
10	16QAM	1	49	23.15	23.14	22.95		
10	16QAM	25	0	21.89	21.88	21.89	22.5	2
10	16QAM	25	12	21.91	21.84	21.94		
10	16QAM	25	25	21.86	21.95	21.94		
10	16QAM	50	0	21.89	21.91	21.87	22.5	2
10	64QAM	1	0	22.07	21.95	22.02		
10	64QAM	1	25	21.96	21.94	22.00		
10	64QAM	1	49	21.93	22.08	20.89	21.5	3
10	64QAM	25	0	20.93	20.90	20.94		
10	64QAM	25	12	20.90	20.98	21.00		
10	64QAM	25	25	20.90	20.96	21.06	21.5	3
10	64QAM	50	0	20.92	20.96	21.00		
Channel				26715	26865	27015	24.5	0
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.93	23.75	23.69		
5	QPSK	1	12	23.76	23.67	23.83	23.5	1
5	QPSK	1	24	23.91	23.85	23.75		
5	QPSK	12	0	22.88	22.89	22.83		
5	QPSK	12	7	22.98	22.95	23.01	23.5	1



FCC SAR TEST REPORT

Report No. : FA092423

5	QPSK	12	13	22.86	22.90	22.97		
5	QPSK	25	0	22.96	22.89	22.86		
5	16QAM	1	0	23.15	23.10	23.04		
5	16QAM	1	12	23.12	23.02	23.14	23.5	1
5	16QAM	1	24	23.12	23.16	22.96		
5	16QAM	12	0	21.88	21.86	21.86		
5	16QAM	12	7	21.95	21.91	21.92	22.5	2
5	16QAM	12	13	21.96	21.93	21.98		
5	16QAM	25	0	21.92	21.96	21.91		
5	64QAM	1	0	21.99	21.87	21.96	22.5	2
5	64QAM	1	12	21.91	22.03	22.03		
5	64QAM	1	24	21.93	22.04	20.87		
5	64QAM	12	0	20.96	20.94	20.93	21.5	3
5	64QAM	12	7	20.92	20.96	20.97		
5	64QAM	12	13	20.84	21.02	21.02		
5	64QAM	25	0	20.93	20.97	20.93		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.91	23.77	23.72	24.5	0
3	QPSK	1	8	23.85	23.69	23.81		
3	QPSK	1	14	23.82	23.83	23.73		
3	QPSK	8	0	22.88	22.80	22.92	23.5	1
3	QPSK	8	4	23.00	22.95	22.95		
3	QPSK	8	7	22.87	22.88	22.94		
3	QPSK	15	0	22.93	22.94	22.84	23.5	1
3	16QAM	1	0	23.14	23.05	23.06		
3	16QAM	1	8	23.08	23.03	23.14		
3	16QAM	1	14	23.10	23.14	22.95	22.5	2
3	16QAM	8	0	21.84	21.91	21.92		
3	16QAM	8	4	21.96	21.92	21.93		
3	16QAM	8	7	21.94	21.94	21.92	22.5	2
3	16QAM	15	0	21.93	21.91	21.89		
3	64QAM	1	0	22.02	21.90	21.97		
3	64QAM	1	8	22.00	21.96	21.99	22.5	2
3	64QAM	1	14	22.01	22.00	20.97		
3	64QAM	8	0	20.93	20.87	20.91		
3	64QAM	8	4	20.93	20.97	21.01	21.5	3
3	64QAM	8	7	20.92	20.97	20.99		
3	64QAM	15	0	20.96	20.94	20.95		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.93	23.74	23.73	24.5	0
1.4	QPSK	1	3	23.81	23.65	23.82		
1.4	QPSK	1	5	23.91	23.77	23.70		
1.4	QPSK	3	0	23.93	23.70	23.71		
1.4	QPSK	3	1	23.81	23.68	23.79		
1.4	QPSK	3	3	23.90	23.84	23.71		
1.4	QPSK	6	0	22.94	22.94	22.94	23.5	1
1.4	16QAM	1	0	23.21	23.08	23.06	23.5	1
1.4	16QAM	1	3	23.06	22.99	23.12		
1.4	16QAM	1	5	23.10	23.15	22.98		
1.4	16QAM	3	0	23.16	23.08	22.99		
1.4	16QAM	3	1	23.04	23.07	23.12		
1.4	16QAM	3	3	23.19	23.23	22.95		
1.4	16QAM	6	0	21.95	21.90	21.89	22.5	2
1.4	64QAM	1	0	22.01	21.90	21.96	22.5	2



FCC SAR TEST REPORT

Report No. : FA092423

1.4	64QAM	1	3	21.91	22.00	22.00		
1.4	64QAM	1	5	21.95	22.04	20.93		
1.4	64QAM	3	0	22.06	21.85	22.00		
1.4	64QAM	3	1	21.93	21.96	21.95		
1.4	64QAM	3	3	21.93	22.05	20.93		
1.4	64QAM	6	0	20.94	20.91	20.98	21.5	3

<LTE Band 30 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.15		23	0
10	QPSK	1	25		22.11			
10	QPSK	1	49		22.05			
10	QPSK	25	0		21.24		22	1
10	QPSK	25	12		21.19			
10	QPSK	25	25		21.21			
10	QPSK	50	0		21.20			
10	16QAM	1	0		21.49		22	1
10	16QAM	1	25		21.53			
10	16QAM	1	49		21.46			
10	16QAM	25	0		20.15		21	2
10	16QAM	25	12		20.22			
10	16QAM	25	25		20.19			
10	16QAM	50	0		20.21			
10	64QAM	1	0		20.36		21	2
10	64QAM	1	25		20.39			
10	64QAM	1	49		20.31			
10	64QAM	25	0		19.20		20	3
10	64QAM	25	12		19.27			
10	64QAM	25	25		19.25			
10	64QAM	50	0		19.26			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.14	22.08	22.08	23	0
5	QPSK	1	12	22.02	22.03	22.02		
5	QPSK	1	24	22.01	22.00	22.00		
5	QPSK	12	0	21.11	21.14	21.13	22	1
5	QPSK	12	7	21.17	21.11	21.17		
5	QPSK	12	13	21.21	21.16	21.13		
5	QPSK	25	0	21.17	21.11	21.10		
5	16QAM	1	0	21.49	21.47	21.41	22	1
5	16QAM	1	12	21.49	21.53	21.47		
5	16QAM	1	24	21.40	21.45	21.45		
5	16QAM	12	0	20.14	20.14	20.07	21	2
5	16QAM	12	7	20.20	20.16	20.20		
5	16QAM	12	13	20.13	20.09	20.13		
5	16QAM	25	0	20.14	20.11	20.13		
5	64QAM	1	0	20.33	20.30	20.29	21	2
5	64QAM	1	12	20.39	20.29	20.30		
5	64QAM	1	24	20.25	20.26	20.23		
5	64QAM	12	0	19.17	19.20	19.15	20	3
5	64QAM	12	7	19.22	19.26	19.23		
5	64QAM	12	13	19.23	19.22	19.21		
5	64QAM	25	0	19.23	19.16	19.17		



<LTE Band 66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	24	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.52	23.54	23.57		
20	QPSK	1	49	23.39	23.48	23.43	23	1
20	QPSK	1	99	23.41	23.45	23.42		
20	QPSK	50	0	22.61	22.62	22.65		
20	QPSK	50	24	22.57	22.61	22.64	23	1
20	QPSK	50	50	22.55	22.60	22.61		
20	QPSK	100	0	22.55	22.55	22.64		
20	16QAM	1	0	22.83	22.81	22.99	23	1
20	16QAM	1	49	22.81	22.83	22.96		
20	16QAM	1	99	22.85	22.82	22.81		
20	16QAM	50	0	21.50	21.64	21.62	22	2
20	16QAM	50	24	21.61	21.60	21.68		
20	16QAM	50	50	21.55	21.62	21.61		
20	16QAM	100	0	21.57	21.56	21.67	22	2
20	64QAM	1	0	21.65	21.80	21.75		
20	64QAM	1	49	21.66	21.72	21.41		
20	64QAM	1	99	21.68	21.76	21.65	21	3
20	64QAM	50	0	20.53	20.63	20.49		
20	64QAM	50	24	20.61	20.62	20.69		
20	64QAM	50	50	20.56	20.64	20.63	21	3
20	64QAM	100	0	20.59	20.59	20.64		
Channel				132047	132322	132597	24	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.44	23.45	23.48		
15	QPSK	1	37	23.31	23.47	23.34	23	1
15	QPSK	1	74	23.38	23.37	23.37		
15	QPSK	36	0	22.47	22.57	22.52		
15	QPSK	36	20	22.54	22.56	22.58	23	1
15	QPSK	36	39	22.52	22.59	22.51		
15	QPSK	75	0	22.46	22.45	22.58		
15	16QAM	1	0	22.73	22.72	22.97	23	1
15	16QAM	1	37	22.78	22.81	22.95		
15	16QAM	1	74	22.82	22.72	22.74		
15	16QAM	36	0	21.44	21.62	21.53	22	2
15	16QAM	36	20	21.52	21.56	21.60		
15	16QAM	36	39	21.48	21.54	21.52		
15	16QAM	75	0	21.54	21.54	21.64	22	2
15	64QAM	1	0	21.55	21.75	21.75		
15	64QAM	1	37	21.66	21.62	21.39		
15	64QAM	1	74	21.59	21.71	21.65	21	3
15	64QAM	36	0	20.50	20.62	20.46		
15	64QAM	36	20	20.60	20.54	20.59		
15	64QAM	36	39	20.52	20.63	20.55	21	3
15	64QAM	75	0	20.52	20.57	20.64		
Channel				132022	132322	132622	24	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	23.50	23.52	23.50		
10	QPSK	1	25	23.31	23.44	23.42	23	1
10	QPSK	1	49	23.31	23.42	23.42		
10	QPSK	25	0	22.47	22.57	22.58		
10	QPSK	25	12	22.53	22.58	22.60	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	22.55	22.50	22.57		
10	QPSK	50	0	22.47	22.45	22.58		
10	16QAM	1	0	22.79	22.78	22.91		
10	16QAM	1	25	22.73	22.82	22.93	23	1
10	16QAM	1	49	22.79	22.74	22.77		
10	16QAM	25	0	21.45	21.62	21.61		
10	16QAM	25	12	21.56	21.56	21.61	22	2
10	16QAM	25	25	21.52	21.54	21.56		
10	16QAM	50	0	21.56	21.49	21.63		
10	64QAM	1	0	21.59	21.72	21.75	22	2
10	64QAM	1	25	21.63	21.64	21.38		
10	64QAM	1	49	21.62	21.72	21.63		
10	64QAM	25	0	20.50	20.63	20.40	21	3
10	64QAM	25	12	20.56	20.60	20.63		
10	64QAM	25	25	20.49	20.55	20.57		
10	64QAM	50	0	20.50	20.58	20.56		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	23.52	23.49	23.49	24	0
5	QPSK	1	12	23.33	23.40	23.40		
5	QPSK	1	24	23.32	23.35	23.40		
5	QPSK	12	0	22.55	22.57	22.53	23	1
5	QPSK	12	7	22.58	22.52	22.57		
5	QPSK	12	13	22.46	22.60	22.61		
5	QPSK	25	0	22.47	22.46	22.59	23	1
5	16QAM	1	0	22.78	22.80	22.93		
5	16QAM	1	12	22.76	22.81	22.87		
5	16QAM	1	24	22.76	22.78	22.74	22	2
5	16QAM	12	0	21.40	21.62	21.55		
5	16QAM	12	7	21.52	21.57	21.60		
5	16QAM	12	13	21.54	21.52	21.56	22	2
5	16QAM	25	0	21.55	21.48	21.60		
5	64QAM	1	0	21.64	21.75	21.69		
5	64QAM	1	12	21.66	21.63	21.35	22	2
5	64QAM	1	24	21.62	21.67	21.60		
5	64QAM	12	0	20.43	20.58	20.40		
5	64QAM	12	7	20.53	20.62	20.61	21	3
5	64QAM	12	13	20.52	20.59	20.59		
5	64QAM	25	0	20.51	20.51	20.63		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	23.47	23.53	23.51	24	0
3	QPSK	1	8	23.30	23.41	23.37		
3	QPSK	1	14	23.40	23.37	23.42		
3	QPSK	8	0	22.53	22.58	22.51	23	1
3	QPSK	8	4	22.61	22.55	22.56		
3	QPSK	8	7	22.53	22.59	22.56		
3	QPSK	15	0	22.49	22.47	22.58	23	1
3	16QAM	1	0	22.78	22.79	22.99		
3	16QAM	1	8	22.78	22.74	22.89		
3	16QAM	1	14	22.78	22.79	22.78	22	2
3	16QAM	8	0	21.50	21.58	21.60		
3	16QAM	8	4	21.54	21.53	21.66		
3	16QAM	8	7	21.48	21.54	21.61	22	2
3	16QAM	15	0	21.55	21.50	21.67		
3	64QAM	1	0	21.59	21.80	21.68	22	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	21.57	21.62	21.41	21	3
3	64QAM	1	14	21.59	21.72	21.56		
3	64QAM	8	0	20.49	20.53	20.47		
3	64QAM	8	4	20.52	20.57	20.59		
3	64QAM	8	7	20.50	20.60	20.61		
3	64QAM	15	0	20.54	20.54	20.55		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	23.43	23.51	23.50	24	0
1.4	QPSK	1	3	23.37	23.48	23.35		
1.4	QPSK	1	5	23.41	23.43	23.32		
1.4	QPSK	3	0	23.44	23.51	23.51		
1.4	QPSK	3	1	23.30	23.42	23.38		
1.4	QPSK	3	3	23.33	23.42	23.39		
1.4	QPSK	6	0	22.50	22.47	22.63	23	1
1.4	16QAM	1	0	22.76	22.81	22.94	23	1
1.4	16QAM	1	3	22.72	22.83	22.86		
1.4	16QAM	1	5	22.83	22.72	22.71		
1.4	16QAM	3	0	22.76	22.72	22.98		
1.4	16QAM	3	1	22.76	22.74	22.90		
1.4	16QAM	3	3	22.82	22.77	22.72		
1.4	16QAM	6	0	21.48	21.46	21.65	22	2
1.4	64QAM	1	0	21.56	21.75	21.67	22	2
1.4	64QAM	1	3	21.63	21.68	21.40		
1.4	64QAM	1	5	21.65	21.68	21.55		
1.4	64QAM	3	0	21.61	21.77	21.67		
1.4	64QAM	3	1	21.59	21.69	21.32		
1.4	64QAM	3	3	21.62	21.72	21.65		
1.4	64QAM	6	0	20.58	20.49	20.61	21	3



<LTE Band 66 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	24	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.60	22.61	22.68		
20	QPSK	1	49	22.55	22.60	22.57	23	1
20	QPSK	1	99	22.54	22.58	22.59		
20	QPSK	50	0	22.03	22.05	22.06		
20	QPSK	50	24	21.95	22.00	21.95	23	1
20	QPSK	50	50	22.01	21.94	21.98		
20	QPSK	100	0	21.94	21.95	21.98		
20	16QAM	1	0	21.96	22.04	22.01	23	1
20	16QAM	1	49	21.91	21.97	21.94		
20	16QAM	1	99	21.97	21.98	21.93		
20	16QAM	50	0	20.91	20.94	20.86	22	2
20	16QAM	50	24	20.93	20.96	20.92		
20	16QAM	50	50	21.04	21.05	21.03		
20	16QAM	100	0	20.90	20.96	20.90	22	2
20	64QAM	1	0	20.93	20.98	20.91		
20	64QAM	1	49	20.89	20.98	20.94		
20	64QAM	1	99	20.93	20.93	20.92	21	3
20	64QAM	50	0	19.91	19.98	19.88		
20	64QAM	50	24	19.89	19.94	19.86		
20	64QAM	50	50	19.93	20.02	19.93	21	3
20	64QAM	100	0	19.93	19.97	19.91		
Channel				132047	132322	132597	24	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.57	22.58	22.64		
15	QPSK	1	37	22.54	22.57	22.49	23	1
15	QPSK	1	74	22.48	22.58	22.55		
15	QPSK	36	0	21.90	21.93	21.90		
15	QPSK	36	20	21.93	21.95	21.85	23	1
15	QPSK	36	39	21.98	21.94	21.97		
15	QPSK	75	0	21.92	21.94	21.85		
15	16QAM	1	0	21.93	21.96	21.98	23	1
15	16QAM	1	37	21.91	21.89	21.85		
15	16QAM	1	74	21.91	21.93	21.92		
15	16QAM	36	0	20.91	20.86	20.86	22	2
15	16QAM	36	20	20.87	20.96	20.90		
15	16QAM	36	39	21.01	21.00	20.98		
15	16QAM	75	0	20.84	20.94	20.83	22	2
15	64QAM	1	0	20.84	20.98	20.91		
15	64QAM	1	37	20.81	20.91	20.84		
15	64QAM	1	74	20.91	20.93	20.83	21	3
15	64QAM	36	0	19.89	19.90	19.83		
15	64QAM	36	20	19.84	19.84	19.85		
15	64QAM	36	39	19.84	20.01	19.89	21	3
15	64QAM	75	0	19.88	19.87	19.90		
Channel				132022	132322	132622	24	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.59	22.53	22.61		
10	QPSK	1	25	22.48	22.53	22.48	24	0
10	QPSK	1	49	22.48	22.60	22.52		
10	QPSK	25	0	21.95	21.90	21.92	23	1
10	QPSK	25	12	21.93	22.00	21.93		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	21.95	22.04	21.97		
10	QPSK	50	0	21.88	21.91	21.79		
10	16QAM	1	0	21.88	22.02	21.99		
10	16QAM	1	25	21.89	21.92	21.93	23	1
10	16QAM	1	49	21.95	21.88	21.86		
10	16QAM	25	0	20.81	20.87	20.78		
10	16QAM	25	12	20.87	20.92	20.86	22	2
10	16QAM	25	25	21.02	21.02	20.97		
10	16QAM	50	0	20.88	20.95	20.84		
10	64QAM	1	0	20.86	20.92	20.82	22	2
10	64QAM	1	25	20.80	20.94	20.92		
10	64QAM	1	49	20.85	20.84	20.91		
10	64QAM	25	0	19.90	19.92	19.85	21	3
10	64QAM	25	12	19.83	19.88	19.76		
10	64QAM	25	25	19.92	20.00	19.84		
10	64QAM	50	0	19.87	19.90	19.81		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.51	22.60	22.63	24	0
5	QPSK	1	12	22.46	22.51	22.50		
5	QPSK	1	24	22.51	22.51	22.52		
5	QPSK	12	0	21.96	21.96	21.94	23	1
5	QPSK	12	7	21.85	21.95	21.87		
5	QPSK	12	13	21.92	22.01	21.97		
5	QPSK	25	0	21.91	21.94	21.85	23	1
5	16QAM	1	0	21.93	22.01	21.94		
5	16QAM	1	12	21.83	21.92	21.87		
5	16QAM	1	24	21.89	21.92	21.92	22	2
5	16QAM	12	0	20.82	20.91	20.84		
5	16QAM	12	7	20.90	20.91	20.91		
5	16QAM	12	13	20.99	21.03	20.95	22	2
5	16QAM	25	0	20.80	20.90	20.81		
5	64QAM	1	0	20.86	20.98	20.89		
5	64QAM	1	12	20.79	20.94	20.93	22	2
5	64QAM	1	24	20.86	20.87	20.88		
5	64QAM	12	0	19.90	19.98	19.87		
5	64QAM	12	7	19.86	19.93	19.77	21	3
5	64QAM	12	13	19.86	20.02	19.83		
5	64QAM	25	0	19.84	19.89	19.84		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.58	22.53	22.67	24	0
3	QPSK	1	8	22.52	22.59	22.56		
3	QPSK	1	14	22.49	22.55	22.49		
3	QPSK	8	0	21.94	21.91	21.96	23	1
3	QPSK	8	4	21.93	21.92	21.86		
3	QPSK	8	7	21.92	21.96	21.98		
3	QPSK	15	0	21.86	21.89	21.82	23	1
3	16QAM	1	0	21.95	22.03	21.97		
3	16QAM	1	8	21.89	21.94	21.84		
3	16QAM	1	14	21.94	21.91	21.86	22	2
3	16QAM	8	0	20.84	20.84	20.86		
3	16QAM	8	4	20.89	20.87	20.91		
3	16QAM	8	7	21.03	20.95	21.02	22	2
3	16QAM	15	0	20.81	20.89	20.86		
3	64QAM	1	0	20.85	20.89	20.90	22	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	20.84	20.96	20.90	21	3
3	64QAM	1	14	20.90	20.85	20.89		
3	64QAM	8	0	19.83	19.98	19.84		
3	64QAM	8	4	19.89	19.89	19.79		
3	64QAM	8	7	19.88	19.97	19.84		
3	64QAM	15	0	19.91	19.95	19.88		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.59	22.50	22.59	24	0
1.4	QPSK	1	3	22.48	22.60	22.52		
1.4	QPSK	1	5	22.50	22.60	22.52		
1.4	QPSK	3	0	22.57	22.46	22.55		
1.4	QPSK	3	1	22.39	22.51	22.57		
1.4	QPSK	3	3	22.40	22.53	22.50		
1.4	QPSK	6	0	21.84	21.93	21.83	23	1
1.4	16QAM	1	0	21.86	21.97	21.99	23	1
1.4	16QAM	1	3	21.81	21.90	21.92		
1.4	16QAM	1	5	21.87	21.98	21.86		
1.4	16QAM	3	0	21.82	21.99	21.88		
1.4	16QAM	3	1	21.82	21.85	21.74		
1.4	16QAM	3	3	21.81	21.92	21.81		
1.4	16QAM	6	0	20.84	20.86	20.84	22	2
1.4	64QAM	1	0	20.89	20.98	20.91	22	2
1.4	64QAM	1	3	20.83	20.92	20.91		
1.4	64QAM	1	5	20.83	20.93	20.92		
1.4	64QAM	3	0	20.81	20.84	20.91		
1.4	64QAM	3	1	20.79	20.87	20.88		
1.4	64QAM	3	3	20.82	20.83	20.77		
1.4	64QAM	6	0	19.88	19.94	19.82	21	3



<LTE Band 71 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372	24.5	0
Frequency (MHz)				673	683	688		
20	QPSK	1	0	24.03	24.03	24.12		
20	QPSK	1	49	24.02	23.88	23.93	23.5	1
20	QPSK	1	99	23.98	24.01	24.01		
20	QPSK	50	0	23.12	23.08	23.14		
20	QPSK	50	24	22.96	22.96	23.05	23.5	1
20	QPSK	50	50	23.06	23.07	23.12		
20	QPSK	100	0	23.01	22.99	23.09		
20	16QAM	1	0	23.32	23.15	23.20	23.5	1
20	16QAM	1	49	23.15	23.26	23.25		
20	16QAM	1	99	23.17	23.30	23.37		
20	16QAM	50	0	21.92	21.92	21.95	22.5	2
20	16QAM	50	24	21.99	21.96	22.03		
20	16QAM	50	50	21.99	22.06	22.15		
20	16QAM	100	0	21.97	22.03	22.09	22.5	2
20	64QAM	1	0	21.97	21.99	21.99		
20	64QAM	1	49	21.96	22.15	22.14		
20	64QAM	1	99	22.17	22.20	22.29	21.5	3
20	64QAM	50	0	20.92	20.91	21.00		
20	64QAM	50	24	20.98	20.95	21.07		
20	64QAM	50	50	20.97	21.09	21.16	21.5	3
20	64QAM	100	0	20.98	21.04	21.10		
Channel				133197	133297	133397	24.5	0
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	24.04	23.81	23.77		
15	QPSK	1	37	23.96	23.87	23.90	23.5	1
15	QPSK	1	74	24.03	23.95	24.01		
15	QPSK	36	0	23.12	22.83	22.90		
15	QPSK	36	20	23.16	22.94	23.05	23.5	1
15	QPSK	36	39	22.99	23.06	23.08		
15	QPSK	75	0	22.91	22.97	23.08		
15	16QAM	1	0	23.27	23.15	23.14	23.5	1
15	16QAM	1	37	23.05	23.19	23.18		
15	16QAM	1	74	23.17	23.28	23.28		
15	16QAM	36	0	21.84	21.86	21.87	22.5	2
15	16QAM	36	20	21.90	21.94	22.02		
15	16QAM	36	39	21.94	22.06	22.14		
15	16QAM	75	0	21.96	21.97	22.04	22.5	2
15	64QAM	1	0	21.94	21.98	21.96		
15	64QAM	1	37	21.86	22.14	22.10		
15	64QAM	1	74	22.14	22.19	22.21	21.5	3
15	64QAM	36	0	20.90	20.89	20.96		
15	64QAM	36	20	20.93	20.94	21.00		
15	64QAM	36	39	20.87	21.02	21.06	21.5	3
15	64QAM	75	0	20.90	21.02	21.01		
Channel				133172	133272	133422	24.5	0
Frequency (MHz)				668	678	693		
10	QPSK	1	0	24.11	23.81	23.78		
10	QPSK	1	25	23.99	23.86	23.89	24.5	0
10	QPSK	1	49	24.05	23.97	23.93		
10	QPSK	25	0	23.12	22.78	22.87		
10	QPSK	25	12	23.10	22.86	23.03	23.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	23.06	23.04	23.02		
10	QPSK	50	0	23.01	22.90	23.07		
10	16QAM	1	0	23.32	23.08	23.14		
10	16QAM	1	25	23.10	23.21	23.25	23.5	1
10	16QAM	1	49	23.08	23.20	23.30		
10	16QAM	25	0	21.90	21.89	21.87		
10	16QAM	25	12	21.96	21.89	22.02	22.5	2
10	16QAM	25	25	21.96	22.01	22.10		
10	16QAM	50	0	21.87	22.01	22.09		
10	64QAM	1	0	21.90	21.97	21.97	22.5	2
10	64QAM	1	25	21.88	22.14	22.08		
10	64QAM	1	49	22.10	22.17	22.21		
10	64QAM	25	0	20.90	20.82	20.94	21.5	3
10	64QAM	25	12	20.96	20.85	21.05		
10	64QAM	25	25	20.88	21.07	21.08		
10	64QAM	50	0	20.90	20.96	21.03		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	24.05	23.81	23.78	24.5	0
5	QPSK	1	12	24.01	23.79	23.84		
5	QPSK	1	24	24.01	23.99	24.01		
5	QPSK	12	0	23.06	22.84	22.91	23.5	1
5	QPSK	12	7	23.15	22.94	23.05		
5	QPSK	12	13	22.97	23.01	23.11		
5	QPSK	25	0	22.98	22.98	23.05	23.5	1
5	16QAM	1	0	23.23	23.12	23.18		
5	16QAM	1	12	23.11	23.18	23.16		
5	16QAM	1	24	23.08	23.28	23.28	22.5	2
5	16QAM	12	0	21.86	21.86	21.92		
5	16QAM	12	7	21.90	21.91	22.00		
5	16QAM	12	13	21.90	21.96	22.15	22.5	2
5	16QAM	25	0	21.92	22.00	22.09		
5	64QAM	1	0	21.93	21.89	21.90		
5	64QAM	1	12	21.87	22.08	22.11	22.5	2
5	64QAM	1	24	22.15	22.20	22.28		
5	64QAM	12	0	20.89	20.82	20.92		
5	64QAM	12	7	20.93	20.88	21.03	21.5	3
5	64QAM	12	13	20.97	21.03	21.15		
5	64QAM	25	0	20.97	21.03	21.09		

Reduced Power Mode
<LTE Band 2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	16.5	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	15.52	15.39	15.40	16.5	0
20	QPSK	1	49	15.44	15.35	15.37		
20	QPSK	1	99	15.32	15.38	15.37		
20	QPSK	50	0	14.68	14.63	14.50	15.5	1
20	QPSK	50	24	14.55	14.57	14.49		
20	QPSK	50	50	14.50	14.60	14.45		
20	QPSK	100	0	14.61	14.47	14.48	15.5	1
20	16QAM	1	0	14.55	14.70	14.82		
20	16QAM	1	49	14.57	14.77	14.51		
20	16QAM	1	99	14.47	14.76	14.59	14.5	2
20	16QAM	50	0	13.64	13.62	13.50		
20	16QAM	50	24	13.57	13.44	13.48		
20	16QAM	50	50	13.32	13.59	13.59	14.5	2
20	16QAM	100	0	13.57	13.54	13.52		
20	64QAM	1	0	13.87	13.83	13.64		
20	64QAM	1	49	13.68	13.83	13.82	14.5	2
20	64QAM	1	99	13.87	13.71	13.82		
20	64QAM	50	0	12.77	12.66	12.88		
20	64QAM	50	24	12.82	12.78	12.95	13.5	3
20	64QAM	50	50	12.75	12.79	12.87		
20	64QAM	100	0	12.90	12.58	12.77		
Channel				18675	18900	19125	16.5	0
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	15.45	15.35	15.36	16.5	0
15	QPSK	1	37	15.35	15.32	15.27		
15	QPSK	1	74	15.30	15.35	15.27		
15	QPSK	36	0	14.58	14.48	14.49	15.5	1
15	QPSK	36	20	14.52	14.49	14.45		
15	QPSK	36	39	14.47	14.54	14.42		
15	QPSK	75	0	14.57	14.46	14.47	15.5	1
15	16QAM	1	0	14.45	14.65	14.76		
15	16QAM	1	37	14.55	14.73	14.48		
15	16QAM	1	74	14.37	14.67	14.55	14.5	2
15	16QAM	36	0	13.56	13.56	13.49		
15	16QAM	36	20	13.51	13.39	13.47		
15	16QAM	36	39	13.22	13.58	13.50	14.5	2
15	16QAM	75	0	13.48	13.53	13.44		
15	64QAM	1	0	13.83	13.81	13.58		
15	64QAM	1	37	13.67	13.83	13.72	14.5	2
15	64QAM	1	74	13.83	13.70	13.82		
15	64QAM	36	0	12.68	12.61	12.83		
15	64QAM	36	20	12.81	12.71	12.88	13.5	3
15	64QAM	36	39	12.65	12.78	12.79		
15	64QAM	75	0	12.88	12.48	12.75		
Channel				18650	18900	19150	16.5	0
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	15.50	15.39	15.36	16.5	0
10	QPSK	1	25	15.38	15.25	15.31		
10	QPSK	1	49	15.29	15.29	15.31		
10	QPSK	25	0	14.63	14.48	14.50	15.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	12	14.55	14.53	14.41		
10	QPSK	25	25	14.44	14.53	14.37		
10	QPSK	50	0	14.53	14.41	14.38		
10	16QAM	1	0	14.50	14.65	14.78	15.5	1
10	16QAM	1	25	14.48	14.77	14.47		
10	16QAM	1	49	14.47	14.70	14.55		
10	16QAM	25	0	13.62	13.54	13.43	14.5	2
10	16QAM	25	12	13.56	13.44	13.48		
10	16QAM	25	25	13.26	13.56	13.50		
10	16QAM	50	0	13.54	13.52	13.44	14.5	2
10	64QAM	1	0	13.81	13.76	13.60		
10	64QAM	1	25	13.61	13.82	13.76		
10	64QAM	1	49	13.77	13.65	13.76	13.5	3
10	64QAM	25	0	12.75	12.56	12.88		
10	64QAM	25	12	12.74	12.78	12.87		
10	64QAM	25	25	12.72	12.73	12.85	12.89	12.58
10	64QAM	50	0	12.89	12.58	12.74		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	15.50	15.37	15.35	16.5	0
5	QPSK	1	12	15.42	15.25	15.35		
5	QPSK	1	24	15.25	15.33	15.35		
5	QPSK	12	0	14.61	14.47	14.49	15.5	1
5	QPSK	12	7	14.47	14.54	14.47		
5	QPSK	12	13	14.49	14.54	14.40		
5	QPSK	25	0	14.54	14.42	14.41	15.5	1
5	16QAM	1	0	14.52	14.65	14.78		
5	16QAM	1	12	14.51	14.69	14.41		
5	16QAM	1	24	14.40	14.76	14.52	14.5	2
5	16QAM	12	0	13.58	13.62	13.43		
5	16QAM	12	7	13.49	13.41	13.45		
5	16QAM	12	13	13.29	13.55	13.53	14.5	2
5	16QAM	25	0	13.47	13.49	13.44		
5	64QAM	1	0	13.77	13.73	13.55		
5	64QAM	1	12	13.67	13.83	13.73	14.5	2
5	64QAM	1	24	13.81	13.68	13.80		
5	64QAM	12	0	12.73	12.61	12.87		
5	64QAM	12	7	12.77	12.75	12.94	13.5	3
5	64QAM	12	13	12.68	12.75	12.79		
5	64QAM	25	0	12.81	12.58	12.67		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	15.42	15.37	15.30	16.5	0
3	QPSK	1	8	15.41	15.32	15.27		
3	QPSK	1	14	15.31	15.29	15.34		
3	QPSK	8	0	14.65	14.50	14.48	15.5	1
3	QPSK	8	4	14.50	14.51	14.47		
3	QPSK	8	7	14.46	14.55	14.43		
3	QPSK	15	0	14.58	14.46	14.48	15.5	1
3	16QAM	1	0	14.47	14.62	14.79		
3	16QAM	1	8	14.57	14.73	14.41		
3	16QAM	1	14	14.41	14.70	14.50	14.5	2
3	16QAM	8	0	13.64	13.55	13.40		
3	16QAM	8	4	13.49	13.35	13.47		
3	16QAM	8	7	13.32	13.56	13.58	13.47	13.52
3	16QAM	15	0	13.47	13.48	13.52		



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	0	13.80	13.75	13.60	14.5	2
3	64QAM	1	8	13.62	13.81	13.75		
3	64QAM	1	14	13.87	13.62	13.81		
3	64QAM	8	0	12.73	12.63	12.84	13.5	3
3	64QAM	8	4	12.76	12.76	12.87		
3	64QAM	8	7	12.72	12.77	12.84		
3	64QAM	15	0	12.84	12.48	12.75		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	15.51	15.30	15.35	16.5	0
1.4	QPSK	1	3	15.34	15.33	15.31		
1.4	QPSK	1	5	15.29	15.37	15.27		
1.4	QPSK	3	0	15.44	15.51	15.49		
1.4	QPSK	3	1	15.51	15.50	15.45		
1.4	QPSK	3	3	15.40	15.44	15.37		
1.4	QPSK	6	0	14.56	14.42	14.48	15.5	1
1.4	16QAM	1	0	14.53	14.61	14.78	15.5	1
1.4	16QAM	1	3	14.52	14.77	14.44		
1.4	16QAM	1	5	14.44	14.71	14.58		
1.4	16QAM	3	0	14.62	14.57	14.48		
1.4	16QAM	3	1	14.54	14.44	14.44		
1.4	16QAM	3	3	14.25	14.51	14.53		
1.4	16QAM	6	0	13.56	13.53	13.52	14.5	2
1.4	64QAM	1	0	13.86	13.75	13.63	14.5	2
1.4	64QAM	1	3	13.65	13.73	13.74		
1.4	64QAM	1	5	13.81	13.66	13.73		
1.4	64QAM	3	0	13.68	13.61	13.82		
1.4	64QAM	3	1	13.75	13.69	13.95		
1.4	64QAM	3	3	13.70	13.73	13.81		
1.4	64QAM	6	0	12.89	12.49	12.68	13.5	3

<LTE Band 2 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	11.80	11.67	11.64	12.5	0
20	QPSK	1	49	11.53	11.42	11.39		
20	QPSK	1	99	11.54	11.44	11.36		
20	QPSK	50	0	11.74	11.54	11.60	12.5	0
20	QPSK	50	24	11.69	11.49	11.59		
20	QPSK	50	50	11.65	11.52	11.48		
20	QPSK	100	0	11.66	11.48	11.51	12.5	0
20	16QAM	1	0	11.75	11.56	11.65		
20	16QAM	1	49	11.57	11.42	11.41		
20	16QAM	1	99	11.54	11.38	11.40	12.5	0
20	16QAM	50	0	11.72	11.63	11.63		
20	16QAM	50	24	11.73	11.56	11.58		
20	16QAM	50	50	11.66	11.47	11.52	12.5	0
20	16QAM	100	0	11.76	11.60	11.67		
20	64QAM	1	0	11.60	11.44	11.49		
20	64QAM	1	49	11.33	11.16	11.16	12.5	0
20	64QAM	1	99	11.46	11.36	11.27		
20	64QAM	50	0	11.23	11.10	11.05		
20	64QAM	50	24	11.25	11.14	11.11	12.5	0
20	64QAM	50	50	11.08	10.97	10.94		
20	64QAM	100	0	11.13	10.98	11.00		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	11.80	11.57	11.64	12.5	0
15	QPSK	1	37	11.53	11.42	11.39		
15	QPSK	1	74	11.54	11.44	11.36		
15	QPSK	36	0	11.74	11.54	11.60	12.5	0
15	QPSK	36	20	11.69	11.49	11.59		
15	QPSK	36	39	11.65	11.52	11.48		
15	QPSK	75	0	11.66	11.48	11.51	12.5	0
15	16QAM	1	0	11.75	11.56	11.65		
15	16QAM	1	37	11.57	11.42	11.41		
15	16QAM	1	74	11.54	11.38	11.40	12.5	0
15	16QAM	36	0	11.72	11.63	11.63		
15	16QAM	36	20	11.73	11.56	11.58		
15	16QAM	36	39	11.66	11.47	11.52	12.5	0
15	16QAM	75	0	11.76	11.60	11.67		
15	64QAM	1	0	11.60	11.44	11.49		
15	64QAM	1	37	11.33	11.16	11.16	12.5	0
15	64QAM	1	74	11.46	11.36	11.27		
15	64QAM	36	0	11.23	11.10	11.05		
15	64QAM	36	20	11.25	11.14	11.11	12.5	0
15	64QAM	36	39	11.08	10.97	10.94		
15	64QAM	75	0	11.13	10.98	11.00		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	11.72	11.47	11.62	12.5	0
10	QPSK	1	25	11.49	11.38	11.36		
10	QPSK	1	49	11.51	11.39	11.44		
10	QPSK	25	0	11.65	11.55	11.64	12.5	0
10	QPSK	25	12	11.66	11.50	11.56		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	11.65	11.51	11.56		
10	QPSK	50	0	11.61	11.48	11.57		
10	16QAM	1	0	11.68	11.57	11.59		
10	16QAM	1	25	11.52	11.41	11.45	12.5	0
10	16QAM	1	49	11.46	11.36	11.42		
10	16QAM	25	0	11.60	11.57	11.53		
10	16QAM	25	12	11.66	11.60	11.56	12.5	0
10	16QAM	25	25	11.60	11.47	11.48		
10	16QAM	50	0	11.69	11.65	11.62		
10	64QAM	1	0	11.55	11.42	11.42	12.5	0
10	64QAM	1	25	11.33	11.20	11.20		
10	64QAM	1	49	11.36	11.28	11.28		
10	64QAM	25	0	11.17	11.12	11.12	12.5	0
10	64QAM	25	12	11.23	11.06	11.07		
10	64QAM	25	25	10.98	10.91	10.92		
10	64QAM	50	0	11.03	11.00	11.00		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	11.78	11.51	11.62	12.5	0
5	QPSK	1	12	11.47	11.38	11.39		
5	QPSK	1	24	11.52	11.40	11.43		
5	QPSK	12	0	11.65	11.62	11.56	12.5	0
5	QPSK	12	7	11.63	11.51	11.54		
5	QPSK	12	13	11.58	11.47	11.48		
5	QPSK	25	0	11.58	11.47	11.52	12.5	0
5	16QAM	1	0	11.66	11.61	11.56		
5	16QAM	1	12	11.48	11.39	11.42		
5	16QAM	1	24	11.53	11.38	11.41	12.5	0
5	16QAM	12	0	11.60	11.59	11.54		
5	16QAM	12	7	11.67	11.56	11.61		
5	16QAM	12	13	11.60	11.52	11.50	12.5	0
5	16QAM	25	0	11.70	11.64	11.60		
5	64QAM	1	0	11.58	11.47	11.42		
5	64QAM	1	12	11.32	11.22	11.14	12.5	0
5	64QAM	1	24	11.38	11.36	11.28		
5	64QAM	12	0	11.17	11.04	11.11		
5	64QAM	12	7	11.18	11.13	11.15	12.5	0
5	64QAM	12	13	11.08	10.89	10.93		
5	64QAM	25	0	11.03	10.98	10.95		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	11.71	11.52	11.55	12.5	0
3	QPSK	1	8	11.43	11.34	11.34		
3	QPSK	1	14	11.48	11.34	11.40		
3	QPSK	8	0	11.67	11.55	11.63	12.5	0
3	QPSK	8	4	11.67	11.52	11.60		
3	QPSK	8	7	11.60	11.45	11.56		
3	QPSK	15	0	11.63	11.50	11.55	12.5	0
3	16QAM	1	0	11.71	11.57	11.60		
3	16QAM	1	8	11.47	11.42	11.46		
3	16QAM	1	14	11.51	11.43	11.44	12.5	0
3	16QAM	8	0	11.69	11.55	11.61		
3	16QAM	8	4	11.67	11.61	11.57		
3	16QAM	8	7	11.66	11.55	11.56	12.5	0
3	16QAM	15	0	11.66	11.64	11.67		
3	64QAM	1	0	11.50	11.46	11.47	12.5	0



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	11.23	11.13	11.17	12.5	0
3	64QAM	1	14	11.39	11.32	11.37		
3	64QAM	8	0	11.14	11.13	11.06		
3	64QAM	8	4	11.25	11.05	11.12		
3	64QAM	8	7	11.07	10.95	10.92		
3	64QAM	15	0	11.03	11.00	10.94		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	11.70	11.52	11.60	12.5	0
1.4	QPSK	1	3	11.43	11.35	11.44		
1.4	QPSK	1	5	11.53	11.38	11.42		
1.4	QPSK	3	0	11.70	11.56	11.55		
1.4	QPSK	3	1	11.62	11.54	11.51		
1.4	QPSK	3	3	11.55	11.51	11.55		
1.4	QPSK	6	0	11.65	11.46	11.55	12.5	1
1.4	16QAM	1	0	11.65	11.65	11.65	12.5	1
1.4	16QAM	1	3	11.49	11.42	11.46		
1.4	16QAM	1	5	11.53	11.43	11.35		
1.4	16QAM	3	0	11.66	11.59	11.61		
1.4	16QAM	3	1	11.65	11.54	11.56		
1.4	16QAM	3	3	11.65	11.52	11.52		
1.4	16QAM	6	0	11.66	11.56	11.65	12.5	2
1.4	64QAM	1	0	11.58	11.42	11.51	12.5	2
1.4	64QAM	1	3	11.24	11.19	11.16		
1.4	64QAM	1	5	11.41	11.36	11.31		
1.4	64QAM	3	0	11.21	11.12	11.13		
1.4	64QAM	3	1	11.22	11.05	11.10		
1.4	64QAM	3	3	11.08	10.91	10.98		
1.4	64QAM	6	0	11.09	10.95	10.94	12.5	3



<LTE Band 4 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	16	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	15.51	15.46	15.59		
20	QPSK	1	49	15.35	15.42	15.45	15	1
20	QPSK	1	99	15.40	15.41	15.51		
20	QPSK	50	0	14.66	14.67	14.71		
20	QPSK	50	24	14.52	14.65	14.68	15	1
20	QPSK	50	50	14.63	14.62	14.65		
20	QPSK	100	0	14.56	14.55	14.58		
20	16QAM	1	0	14.77	14.86	14.79	15	1
20	16QAM	1	49	14.74	14.76	14.78		
20	16QAM	1	99	14.81	14.74	14.97		
20	16QAM	50	0	13.27	13.52	13.64	14	2
20	16QAM	50	24	13.62	13.61	13.63		
20	16QAM	50	50	13.54	13.66	13.62		
20	16QAM	100	0	13.59	13.59	13.58	14	2
20	64QAM	1	0	13.34	13.41	13.46		
20	64QAM	1	49	13.72	13.50	13.51		
20	64QAM	1	99	13.74	13.74	13.50	13	3
20	64QAM	50	0	12.47	12.39	12.68		
20	64QAM	50	24	12.42	12.71	12.55		
20	64QAM	50	50	12.62	12.77	12.58	13	3
20	64QAM	50	50	12.62	12.77	12.58		
20	64QAM	100	0	12.59	12.58	12.56		
Channel				20025	20175	20325	16	0
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	15.45	15.43	15.49		
15	QPSK	1	37	15.28	15.40	15.41	15	1
15	QPSK	1	74	15.37	15.35	15.50		
15	QPSK	36	0	14.29	14.49	14.50		
15	QPSK	36	20	14.49	14.58	14.60	15	1
15	QPSK	36	39	14.57	14.58	14.56		
15	QPSK	75	0	14.50	14.53	14.53		
15	16QAM	1	0	14.75	14.86	14.74	15	1
15	16QAM	1	37	14.73	14.74	14.70		
15	16QAM	1	74	14.77	14.71	14.96		
15	16QAM	36	0	13.19	13.51	13.58	14	2
15	16QAM	36	20	13.58	13.55	13.59		
15	16QAM	36	39	13.53	13.61	13.60		
15	16QAM	75	0	13.51	13.52	13.49	14	2
15	64QAM	1	0	13.25	13.40	13.42		
15	64QAM	1	37	13.63	13.50	13.44		
15	64QAM	1	74	13.67	13.68	13.41	13	3
15	64QAM	36	0	12.46	12.31	12.67		
15	64QAM	36	20	12.35	12.68	12.46		
15	64QAM	36	39	12.62	12.67	12.55	13	3
15	64QAM	36	39	12.62	12.67	12.55		
15	64QAM	75	0	12.58	12.57	12.50		
Channel				20000	20175	20350	16	0
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	15.44	15.39	15.57		
10	QPSK	1	25	15.25	15.35	15.38	16	0
10	QPSK	1	49	15.33	15.31	15.50		
10	QPSK	25	0	14.35	14.52	14.45		
10	QPSK	25	12	14.44	14.64	14.59	15	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	14.54	14.62	14.65		
10	QPSK	50	0	14.55	14.56	14.54		
10	16QAM	1	0	14.69	14.84	14.72		
10	16QAM	1	25	14.68	14.73	14.69	15	1
10	16QAM	1	49	14.80	14.69	14.94		
10	16QAM	25	0	13.23	13.48	13.64		
10	16QAM	25	12	13.56	13.54	13.58	14	2
10	16QAM	25	25	13.48	13.63	13.58		
10	16QAM	50	0	13.53	13.51	13.49		
10	64QAM	1	0	13.27	13.31	13.38	14	2
10	64QAM	1	25	13.72	13.43	13.47		
10	64QAM	1	49	13.66	13.64	13.45		
10	64QAM	25	0	12.44	12.35	12.64	13	3
10	64QAM	25	12	12.38	12.70	12.47		
10	64QAM	25	25	12.54	12.74	12.50		
10	64QAM	50	0	12.55	12.54	12.48		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	15.47	15.38	15.56	16	0
5	QPSK	1	12	15.31	15.39	15.37		
5	QPSK	1	24	15.34	15.39	15.45		
5	QPSK	12	0	14.27	14.48	14.49	15	1
5	QPSK	12	7	14.44	14.56	14.60		
5	QPSK	12	13	14.55	14.58	14.59		
5	QPSK	25	0	14.52	14.55	14.52	15	1
5	16QAM	1	0	14.67	14.78	14.78		
5	16QAM	1	12	14.72	14.68	14.77		
5	16QAM	1	24	14.78	14.66	14.94	14	2
5	16QAM	12	0	13.22	13.43	13.61		
5	16QAM	12	7	13.56	13.59	13.62		
5	16QAM	12	13	13.47	13.59	13.61	14	2
5	16QAM	25	0	13.55	13.55	13.48		
5	64QAM	1	0	13.29	13.40	13.44		
5	64QAM	1	12	13.66	13.42	13.48	14	2
5	64QAM	1	24	13.73	13.66	13.42		
5	64QAM	12	0	12.37	12.36	12.58		
5	64QAM	12	7	12.40	12.62	12.45	13	3
5	64QAM	12	13	12.62	12.74	12.52		
5	64QAM	25	0	12.54	12.50	12.50		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	15.50	15.37	15.56	16	0
3	QPSK	1	8	15.33	15.41	15.40		
3	QPSK	1	14	15.35	15.41	15.51		
3	QPSK	8	0	14.28	14.48	14.42	15	1
3	QPSK	8	4	14.52	14.62	14.67		
3	QPSK	8	7	14.57	14.53	14.61		
3	QPSK	15	0	14.55	14.52	14.53	15	1
3	16QAM	1	0	14.67	14.80	14.70		
3	16QAM	1	8	14.68	14.67	14.68		
3	16QAM	1	14	14.71	14.70	14.93	14	2
3	16QAM	8	0	13.20	13.52	13.57		
3	16QAM	8	4	13.60	13.55	13.63		
3	16QAM	8	7	13.45	13.64	13.57	14	2
3	16QAM	15	0	13.58	13.55	13.55		
3	64QAM	1	0	13.25	13.36	13.40	14	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	13.64	13.43	13.44	13	3
3	64QAM	1	14	13.68	13.65	13.42		
3	64QAM	8	0	12.45	12.35	12.58		
3	64QAM	8	4	12.38	12.64	12.45		
3	64QAM	8	7	12.59	12.68	12.48		
3	64QAM	15	0	12.59	12.52	12.49		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	15.46	15.42	15.50	16	0
1.4	QPSK	1	3	15.33	15.39	15.42		
1.4	QPSK	1	5	15.36	15.36	15.41		
1.4	QPSK	3	0	15.14	15.35	15.29		
1.4	QPSK	3	1	15.32	15.36	15.31		
1.4	QPSK	3	3	15.33	15.40	15.39		
1.4	QPSK	6	0	14.56	14.55	14.55	15	1
1.4	16QAM	1	0	14.68	14.78	14.72	15	1
1.4	16QAM	1	3	14.73	14.66	14.78		
1.4	16QAM	1	5	14.78	14.65	14.94		
1.4	16QAM	3	0	14.26	14.44	14.58		
1.4	16QAM	3	1	14.52	14.53	14.58		
1.4	16QAM	3	3	14.49	14.58	14.53		
1.4	16QAM	6	0	13.56	13.59	13.49	14	2
1.4	64QAM	1	0	13.29	13.34	13.42	14	2
1.4	64QAM	1	3	13.72	13.46	13.51		
1.4	64QAM	1	5	13.71	13.67	13.45		
1.4	64QAM	3	0	13.37	13.38	13.66		
1.4	64QAM	3	1	13.39	13.66	13.46		
1.4	64QAM	3	3	13.60	13.73	13.54		
1.4	64QAM	6	0	12.51	12.50	12.47	13	3



<LTE Band 5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	20.5	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.13	20.31	20.30		
10	QPSK	1	25	19.92	20.16	20.10	19.5	1
10	QPSK	1	49	20.05	20.14	20.16		
10	QPSK	25	0	19.23	19.40	19.35		
10	QPSK	25	12	19.28	19.38	19.48	19.5	1
10	QPSK	25	25	19.35	19.38	19.42		
10	QPSK	50	0	19.27	19.33	19.32		
10	16QAM	1	0	19.45	19.44	19.50	19.5	1
10	16QAM	1	25	19.42	19.44	19.42		
10	16QAM	1	49	19.41	19.41	19.45		
10	16QAM	25	0	18.22	18.32	18.39	18.5	2
10	16QAM	25	12	18.31	18.39	18.40		
10	16QAM	25	25	18.37	18.40	18.33		
10	16QAM	50	0	18.25	18.37	18.26	18.5	2
10	64QAM	1	0	18.12	18.17	18.21		
10	64QAM	1	25	18.45	18.41	18.33		
10	64QAM	1	49	18.18	18.27	18.19	17.5	3
10	64QAM	25	0	17.24	17.38	17.27		
10	64QAM	25	12	17.35	17.19	17.43		
10	64QAM	25	25	17.23	17.34	17.18	17.5	3
10	64QAM	50	0	17.09	17.44	17.14		
Channel				20425	20525	20625	20.5	0
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.04	20.21	20.28		
5	QPSK	1	12	19.87	20.07	20.07	19.5	1
5	QPSK	1	24	20.15	20.08	20.14		
5	QPSK	12	0	19.17	19.27	19.27		
5	QPSK	12	7	19.28	19.32	19.47	19.5	1
5	QPSK	12	13	19.32	19.28	19.39		
5	QPSK	25	0	19.22	19.27	19.24		
5	16QAM	1	0	19.41	19.43	19.42	19.5	1
5	16QAM	1	12	19.42	19.42	19.34		
5	16QAM	1	24	19.33	19.34	19.35		
5	16QAM	12	0	18.13	18.22	18.34	18.5	2
5	16QAM	12	7	18.21	18.32	18.31		
5	16QAM	12	13	18.29	18.33	18.26		
5	16QAM	25	0	18.17	18.33	18.25	18.5	2
5	64QAM	1	0	18.10	18.17	18.21		
5	64QAM	1	12	18.44	18.41	18.26		
5	64QAM	1	24	18.15	18.25	18.19	17.5	3
5	64QAM	12	0	17.14	17.35	17.25		
5	64QAM	12	7	17.27	17.10	17.34		
5	64QAM	12	13	17.16	17.26	17.08	17.5	3
5	64QAM	25	0	17.07	17.44	17.14		
Channel				20415	20525	20635	20.5	0
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.04	20.30	20.26		
3	QPSK	1	8	19.87	20.12	20.01	19.5	1
3	QPSK	1	14	20.16	20.14	20.07		
3	QPSK	8	0	19.22	19.30	19.35		
3	QPSK	8	4	19.24	19.31	19.43	19.5	1



FCC SAR TEST REPORT

Report No. : FA092423

3	QPSK	8	7	19.27	19.29	19.33		
3	QPSK	15	0	19.18	19.24	19.24		
3	16QAM	1	0	19.36	19.40	19.50		
3	16QAM	1	8	19.35	19.42	19.34	19.5	1
3	16QAM	1	14	19.36	19.41	19.41		
3	16QAM	8	0	18.17	18.27	18.34		
3	16QAM	8	4	18.22	18.34	18.33	18.5	2
3	16QAM	8	7	18.33	18.30	18.31		
3	16QAM	15	0	18.22	18.32	18.23		
3	64QAM	1	0	18.10	18.07	18.15	18.5	2
3	64QAM	1	8	18.38	18.38	18.26		
3	64QAM	1	14	18.15	18.24	18.16		
3	64QAM	8	0	17.24	17.35	17.18	17.5	3
3	64QAM	8	4	17.35	17.16	17.34		
3	64QAM	8	7	17.16	17.29	17.16		
3	64QAM	15	0	17.02	17.36	17.11		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.13	20.27	20.23	20.5	0
1.4	QPSK	1	3	19.89	20.16	20.06		
1.4	QPSK	1	5	20.24	20.10	20.13		
1.4	QPSK	3	0	20.03	20.16	20.14		
1.4	QPSK	3	1	20.07	20.12	20.25		
1.4	QPSK	3	3	20.07	20.10	20.19		
1.4	QPSK	6	0	19.22	19.26	19.28	19.5	1
1.4	16QAM	1	0	19.40	19.34	19.49	19.5	1
1.4	16QAM	1	3	19.38	19.37	19.42		
1.4	16QAM	1	5	19.34	19.37	19.42		
1.4	16QAM	3	0	18.96	19.07	19.16		
1.4	16QAM	3	1	19.11	19.19	19.16		
1.4	16QAM	3	3	19.09	19.17	19.08		
1.4	16QAM	6	0	18.22	18.29	18.24	18.5	2
1.4	64QAM	1	0	18.09	18.09	18.19	18.5	2
1.4	64QAM	1	3	18.41	18.41	18.29		
1.4	64QAM	1	5	18.18	18.19	18.18		
1.4	64QAM	3	0	18.00	18.16	18.06		
1.4	64QAM	3	1	18.13	17.90	18.16		
1.4	64QAM	3	3	17.99	18.14	17.98		
1.4	64QAM	6	0	17.09	17.43	17.09	17.5	3



<LTE Band 7 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	13.61	13.80	13.60		
20	QPSK	1	49	13.54	13.67	13.56	14.5	0
20	QPSK	1	99	13.57	13.65	13.44		
20	QPSK	50	0	12.78	12.85	12.84		
20	QPSK	50	24	12.77	12.83	12.81	13.5	1
20	QPSK	50	50	12.71	12.78	12.69		
20	QPSK	100	0	12.87	12.91	12.82		
20	16QAM	1	0	12.83	12.85	12.90	13.5	1
20	16QAM	1	49	12.84	12.88	12.89		
20	16QAM	1	99	12.85	12.83	12.81		
20	16QAM	50	0	11.79	11.82	11.77	12.5	2
20	16QAM	50	24	11.89	11.85	11.75		
20	16QAM	50	50	11.87	11.88	11.71		
20	16QAM	100	0	11.84	11.88	11.74	12.5	2
20	64QAM	1	0	11.78	11.94	11.58		
20	64QAM	1	49	11.83	11.93	11.72		
20	64QAM	1	99	11.96	11.95	11.60	11.5	3
20	64QAM	50	0	10.89	10.92	10.61		
20	64QAM	50	24	10.88	10.68	10.69		
20	64QAM	50	50	10.93	10.94	10.62	11.5	3
20	64QAM	100	0	10.68	10.75	10.79		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	13.56	13.72	13.56		
15	QPSK	1	37	13.56	13.64	13.56	14.5	0
15	QPSK	1	74	13.66	13.60	13.36		
15	QPSK	36	0	12.70	12.76	12.76		
15	QPSK	36	20	12.79	12.79	12.81	13.5	1
15	QPSK	36	39	12.72	12.71	12.66		
15	QPSK	75	0	12.77	12.75	12.74		
15	16QAM	1	0	12.82	12.80	12.90	13.5	1
15	16QAM	1	37	12.83	12.78	12.84		
15	16QAM	1	74	12.79	12.76	12.71		
15	16QAM	36	0	11.69	11.81	11.76	12.5	2
15	16QAM	36	20	11.79	11.80	11.65		
15	16QAM	36	39	11.87	11.81	11.71		
15	16QAM	75	0	11.78	11.88	11.65	12.5	2
15	64QAM	1	0	11.69	11.92	11.54		
15	64QAM	1	37	11.73	11.92	11.67		
15	64QAM	1	74	11.91	11.95	11.54	11.5	3
15	64QAM	36	0	10.89	10.91	10.57		
15	64QAM	36	20	10.84	10.64	10.59		
15	64QAM	36	39	10.86	10.86	10.56	11.5	3
15	64QAM	75	0	10.61	10.74	10.78		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	13.61	13.72	13.54		
10	QPSK	1	25	13.64	13.67	13.46	14.5	0
10	QPSK	1	49	13.66	13.61	13.34		
10	QPSK	25	0	12.75	12.75	12.77		
10	QPSK	25	12	12.78	12.80	12.73	13.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	12.76	12.75	12.59		
10	QPSK	50	0	12.79	12.78	12.82		
10	16QAM	1	0	12.78	12.76	12.86		
10	16QAM	1	25	12.83	12.85	12.82	13.5	1
10	16QAM	1	49	12.81	12.80	12.79		
10	16QAM	25	0	11.73	11.76	11.70		
10	16QAM	25	12	11.82	11.75	11.71	12.5	2
10	16QAM	25	25	11.78	11.80	11.65		
10	16QAM	50	0	11.74	11.82	11.67		
10	64QAM	1	0	11.73	11.84	11.56	12.5	2
10	64QAM	1	25	11.78	11.89	11.72		
10	64QAM	1	49	11.95	11.90	11.55		
10	64QAM	25	0	10.85	10.92	10.53	11.5	3
10	64QAM	25	12	10.80	10.58	10.63		
10	64QAM	25	25	10.91	10.86	10.56		
10	64QAM	50	0	10.59	10.72	10.71		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	13.61	13.74	13.52	14.5	0
5	QPSK	1	12	13.54	13.67	13.49		
5	QPSK	1	24	13.68	13.62	13.43		
5	QPSK	12	0	12.77	12.72	12.76	13.5	1
5	QPSK	12	7	12.84	12.82	12.80		
5	QPSK	12	13	12.72	12.73	12.64		
5	QPSK	25	0	12.84	12.74	12.81	13.5	1
5	16QAM	1	0	12.73	12.83	12.85		
5	16QAM	1	12	12.75	12.87	12.80		
5	16QAM	1	24	12.83	12.73	12.72	12.5	2
5	16QAM	12	0	11.69	11.75	11.74		
5	16QAM	12	7	11.86	11.80	11.67		
5	16QAM	12	13	11.83	11.83	11.66	12.5	2
5	16QAM	25	0	11.78	11.84	11.71		
5	64QAM	1	0	11.75	11.91	11.48		
5	64QAM	1	12	11.82	11.92	11.63	12.5	2
5	64QAM	1	24	11.88	11.86	11.52		
5	64QAM	12	0	10.82	10.85	10.58		
5	64QAM	12	7	10.82	10.67	10.63	11.5	3
5	64QAM	12	13	10.88	10.84	10.61		
5	64QAM	25	0	10.60	10.67	10.69		



<LTE Band 7 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	11.27	11.33	11.31		
20	QPSK	1	49	10.96	11.08	11.05	12	0
20	QPSK	1	99	10.95	11.09	10.98		
20	QPSK	50	0	11.06	11.18	11.07		
20	QPSK	50	24	11.16	11.23	11.11	12	0
20	QPSK	50	50	11.06	11.16	11.11		
20	QPSK	100	0	11.18	11.26	11.21		
20	16QAM	1	0	11.24	11.30	11.18	12	0
20	16QAM	1	49	11.05	11.14	11.06		
20	16QAM	1	99	10.95	11.10	11.02		
20	16QAM	50	0	11.17	11.28	11.23	12	0
20	16QAM	50	24	11.10	11.25	11.23		
20	16QAM	50	50	11.10	11.23	11.18		
20	16QAM	100	0	11.16	11.24	11.15	12	0
20	64QAM	1	0	10.87	11.00	10.96		
20	64QAM	1	49	10.84	10.98	10.89		
20	64QAM	1	99	10.87	10.96	10.85	12	0
20	64QAM	50	0	10.19	10.25	10.20		
20	64QAM	50	24	10.20	10.32	10.28		
20	64QAM	50	50	10.13	10.21	10.16	12	0
20	64QAM	100	0	10.26	10.32	10.23		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	11.21	11.27	11.21		
15	QPSK	1	37	10.93	11.03	10.96	12	0
15	QPSK	1	74	10.97	11.09	10.97		
15	QPSK	36	0	11.06	11.18	11.07	12	0
15	QPSK	36	20	11.15	11.16	11.11		
15	QPSK	36	39	11.01	11.11	11.11		
15	QPSK	75	0	11.20	11.19	11.22	12	0
15	16QAM	1	0	11.14	11.30	11.25		
15	16QAM	1	37	11.04	11.07	11.02		
15	16QAM	1	74	10.98	11.02	11.07	12	0
15	16QAM	36	0	11.15	11.27	11.26		
15	16QAM	36	20	11.13	11.21	11.15		
15	16QAM	36	39	11.08	11.17	11.20	12	0
15	16QAM	75	0	11.11	11.14	11.14		
15	64QAM	1	0	10.84	10.98	10.98		
15	64QAM	1	37	10.91	10.96	10.89	12	0
15	64QAM	1	74	10.84	10.86	10.84		
15	64QAM	36	0	10.19	10.19	10.18		
15	64QAM	36	20	10.19	10.22	10.22	12	0
15	64QAM	36	39	10.05	10.13	10.19		
15	64QAM	75	0	10.17	10.28	10.29		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	11.24	11.26	11.29		
10	QPSK	1	25	10.97	10.99	10.98	12	0
10	QPSK	1	49	10.93	11.06	11.05		
10	QPSK	25	0	11.10	11.17	11.13	12	0
10	QPSK	25	12	11.10	11.18	11.11		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	11.04	11.16	11.07		
10	QPSK	50	0	11.11	11.19	11.21		
10	16QAM	1	0	11.23	11.21	11.22		
10	16QAM	1	25	11.06	11.14	11.02	12	0
10	16QAM	1	49	10.97	11.00	11.00		
10	16QAM	25	0	11.12	11.24	11.24		
10	16QAM	25	12	11.09	11.17	11.14	12	0
10	16QAM	25	25	11.10	11.16	11.14		
10	16QAM	50	0	11.14	11.22	11.12		
10	64QAM	1	0	10.90	10.90	10.91	12	0
10	64QAM	1	25	10.84	10.90	10.89		
10	64QAM	1	49	10.90	10.95	10.94		
10	64QAM	25	0	10.18	10.23	10.14	12	0
10	64QAM	25	12	10.25	10.31	10.26		
10	64QAM	25	25	10.10	10.19	10.15		
10	64QAM	50	0	10.22	10.30	10.26		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	11.25	11.28	11.27	12	0
5	QPSK	1	12	11.01	11.06	11.02		
5	QPSK	1	24	11.03	11.07	11.03		
5	QPSK	12	0	11.09	11.17	11.14	12	0
5	QPSK	12	7	11.08	11.13	11.21		
5	QPSK	12	13	11.08	11.13	11.07		
5	QPSK	25	0	11.19	11.25	11.17	12	0
5	16QAM	1	0	11.22	11.29	11.28		
5	16QAM	1	12	11.08	11.13	11.03		
5	16QAM	1	24	10.98	11.08	11.07	12	0
5	16QAM	12	0	11.13	11.24	11.25		
5	16QAM	12	7	11.10	11.18	11.14		
5	16QAM	12	13	11.10	11.22	11.20	12	0
5	16QAM	25	0	11.08	11.18	11.18		
5	64QAM	1	0	10.94	10.94	10.89		
5	64QAM	1	12	10.84	10.98	10.88	12	0
5	64QAM	1	24	10.80	10.94	10.85		
5	64QAM	12	0	10.15	10.18	10.15		
5	64QAM	12	7	10.16	10.27	10.22	12	0
5	64QAM	12	13	10.05	10.18	10.10		
5	64QAM	25	0	10.16	10.23	10.22		



<LTE Band 12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	18.5	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	17.34	17.17	17.26		
10	QPSK	1	25	17.19	17.05	17.08	17.5	1
10	QPSK	1	49	17.02	17.03	16.95		
10	QPSK	25	0	16.30	16.27	16.23		
10	QPSK	25	12	16.33	16.26	16.30	17.5	1
10	QPSK	25	25	16.28	16.13	16.15		
10	QPSK	50	0	16.31	16.35	16.18		
10	16QAM	1	0	16.41	16.32	16.47	17.5	1
10	16QAM	1	25	16.41	16.37	16.40		
10	16QAM	1	49	16.37	16.40	16.47		
10	16QAM	25	0	15.27	15.26	15.24	16.5	2
10	16QAM	25	12	15.28	15.26	15.28		
10	16QAM	25	25	15.23	15.04	14.95		
10	16QAM	50	0	15.31	15.25	15.18	16.5	2
10	64QAM	1	0	15.24	15.44	15.38		
10	64QAM	1	25	15.28	15.21	15.14		
10	64QAM	1	49	15.42	15.14	14.92	15.5	3
10	64QAM	25	0	14.43	14.21	14.35		
10	64QAM	25	12	14.19	14.15	14.10		
10	64QAM	25	25	14.17	13.86	13.89	15.5	3
10	64QAM	50	0	14.44	14.18	14.22		
Channel				23035	23095	23155	18.5	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	17.32	17.10	17.24		
5	QPSK	1	12	17.18	17.05	16.99	17.5	1
5	QPSK	1	24	17.01	16.97	16.86		
5	QPSK	12	0	16.27	16.20	16.21		
5	QPSK	12	7	16.28	16.16	16.24	17.5	1
5	QPSK	12	13	16.27	16.07	16.05		
5	QPSK	25	0	16.29	16.21	16.13		
5	16QAM	1	0	16.40	16.26	16.47	17.5	1
5	16QAM	1	12	16.32	16.34	16.36		
5	16QAM	1	24	16.36	16.35	16.44		
5	16QAM	12	0	15.19	15.21	15.19	16.5	2
5	16QAM	12	7	15.21	15.26	15.21		
5	16QAM	12	13	15.15	15.03	14.94		
5	16QAM	25	0	15.30	15.16	15.18	16.5	2
5	64QAM	1	0	15.19	15.38	15.33		
5	64QAM	1	12	15.20	15.14	15.07		
5	64QAM	1	24	15.35	15.08	14.82	15.5	3
5	64QAM	12	0	14.40	14.12	14.30		
5	64QAM	12	7	14.15	14.15	14.07		
5	64QAM	12	13	14.09	13.82	13.80	15.5	3
5	64QAM	25	0	14.35	14.10	14.13		
Channel				23025	23095	23165	18.5	0
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	17.26	17.15	17.23		
3	QPSK	1	8	17.10	16.98	17.06	17.5	1
3	QPSK	1	14	16.93	17.03	16.86		
3	QPSK	8	0	16.21	16.19	16.17		
3	QPSK	8	4	16.23	16.22	16.25	17.5	1



FCC SAR TEST REPORT

Report No. : FA092423

3	QPSK	8	7	16.24	16.11	16.15		
3	QPSK	15	0	16.27	16.15	16.08		
3	16QAM	1	0	16.39	16.25	16.41		
3	16QAM	1	8	16.31	16.29	16.36	17.5	1
3	16QAM	1	14	16.34	16.36	16.37		
3	16QAM	8	0	15.22	15.23	15.20		
3	16QAM	8	4	15.19	15.25	15.18	16.5	2
3	16QAM	8	7	15.13	15.02	14.90		
3	16QAM	15	0	15.23	15.16	15.15		
3	64QAM	1	0	15.18	15.43	15.28	16.5	2
3	64QAM	1	8	15.19	15.15	15.09		
3	64QAM	1	14	15.39	15.11	14.88		
3	64QAM	8	0	14.39	14.19	14.26	15.5	3
3	64QAM	8	4	14.14	14.08	14.09		
3	64QAM	8	7	14.13	13.77	13.79		
3	64QAM	15	0	14.35	14.10	14.14		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	17.28	17.13	17.19	18.5	0
1.4	QPSK	1	3	17.11	16.97	17.06		
1.4	QPSK	1	5	17.02	16.97	16.91		
1.4	QPSK	3	0	17.08	17.00	16.98		
1.4	QPSK	3	1	17.08	16.98	17.07		
1.4	QPSK	3	3	17.01	16.90	16.91		
1.4	QPSK	6	0	16.29	16.20	16.18	17.5	1
1.4	16QAM	1	0	16.36	16.32	16.37	17.5	1
1.4	16QAM	1	3	16.32	16.35	16.30		
1.4	16QAM	1	5	16.36	16.36	16.40		
1.4	16QAM	3	0	16.01	16.04	16.00		
1.4	16QAM	3	1	16.02	16.00	16.04		
1.4	16QAM	3	3	16.02	15.81	15.71		
1.4	16QAM	6	0	15.27	15.18	15.08	16.5	2
1.4	64QAM	1	0	15.21	15.36	15.28	16.5	2
1.4	64QAM	1	3	15.27	15.13	15.08		
1.4	64QAM	1	5	15.36	15.04	14.89		
1.4	64QAM	3	0	15.17	14.94	15.07		
1.4	64QAM	3	1	14.89	14.94	14.81		
1.4	64QAM	3	3	14.96	14.62	14.62		
1.4	64QAM	6	0	14.39	14.12	14.16	15.5	3

<LTE Band 13 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		19.05		19.5	0
10	QPSK	1	25		18.96			
10	QPSK	1	49		18.99			
10	QPSK	25	0		18.18		18.5	1
10	QPSK	25	12		18.17			
10	QPSK	25	25		18.16			
10	QPSK	50	0		18.05		18.5	1
10	16QAM	1	0		18.27			
10	16QAM	1	25		18.31			
10	16QAM	1	49		18.41		17.5	2
10	16QAM	25	0		17.03			
10	16QAM	25	12		17.20			
10	16QAM	25	25		17.17		17.5	2
10	16QAM	50	0		17.13			
10	64QAM	1	0		16.93			
10	64QAM	1	25		17.18		17.5	2
10	64QAM	1	49		17.02			
10	64QAM	25	0		15.90			
10	64QAM	25	12		16.17		16.5	3
10	64QAM	25	25		16.12			
10	64QAM	50	0		16.33			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	18.96	19.04	18.96	19.5	0
5	QPSK	1	12	18.89	18.90	18.92		
5	QPSK	1	24	18.97	18.89	18.96		
5	QPSK	12	0	18.06	18.10	18.06	18.5	1
5	QPSK	12	7	18.07	18.14	18.15		
5	QPSK	12	13	18.07	18.07	18.12		
5	QPSK	25	0	17.98	17.97	17.96	18.5	1
5	16QAM	1	0	18.25	18.22	18.21		
5	16QAM	1	12	18.25	18.29	18.29		
5	16QAM	1	24	18.39	18.31	18.38	17.5	2
5	16QAM	12	0	17.00	17.02	16.97		
5	16QAM	12	7	17.20	17.12	17.18		
5	16QAM	12	13	17.15	17.07	17.12	17.5	2
5	16QAM	25	0	17.04	17.11	17.07		
5	64QAM	1	0	16.90	16.85	16.88		
5	64QAM	1	12	17.13	17.10	17.14	17.5	2
5	64QAM	1	24	16.97	17.01	17.01		
5	64QAM	12	0	15.88	15.81	15.83		
5	64QAM	12	7	16.08	16.16	16.12	16.5	3
5	64QAM	12	13	16.10	16.07	16.07		
5	64QAM	25	0	16.23	16.27	16.33		

<LTE Band 14 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		20.16		20.5	0
10	QPSK	1	25		19.97			
10	QPSK	1	49		19.94			
10	QPSK	25	0		19.17		19.5	1
10	QPSK	25	12		19.06			
10	QPSK	25	25		19.12			
10	QPSK	50	0		19.02		19.5	1
10	16QAM	1	0		19.50			
10	16QAM	1	25		19.42			
10	16QAM	1	49		19.25		18.5	2
10	16QAM	25	0		18.11			
10	16QAM	25	12		18.07			
10	16QAM	25	25		18.07		18.5	2
10	16QAM	50	0		18.03			
10	64QAM	1	0		18.16			
10	64QAM	1	25		18.17		18.5	2
10	64QAM	1	49		18.11			
10	64QAM	25	0		17.28			
10	64QAM	25	12		17.21		17.5	3
10	64QAM	25	25		17.15			
10	64QAM	50	0		17.06			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	20.13	20.06	20.12	20.5	0
5	QPSK	1	12	19.92	19.87	19.90		
5	QPSK	1	24	19.94	19.89	19.86		
5	QPSK	12	0	18.98	19.04	18.97	19.5	1
5	QPSK	12	7	18.97	18.96	19.03		
5	QPSK	12	13	19.09	19.12	19.06		
5	QPSK	25	0	18.96	19.01	18.94	19.5	1
5	16QAM	1	0	19.44	19.45	19.43		
5	16QAM	1	12	19.42	19.34	19.38		
5	16QAM	1	24	19.22	19.25	19.18	18.5	2
5	16QAM	12	0	18.03	18.01	18.02		
5	16QAM	12	7	18.02	18.02	17.98		
5	16QAM	12	13	18.02	17.99	18.05	18.5	2
5	16QAM	25	0	18.00	17.98	18.00		
5	64QAM	1	0	18.09	18.10	18.06		
5	64QAM	1	12	18.14	18.07	18.12	18.5	2
5	64QAM	1	24	18.08	18.03	18.01		
5	64QAM	12	0	17.18	17.20	17.20		
5	64QAM	12	7	17.16	17.16	17.17	17.5	3
5	64QAM	12	13	17.10	17.10	17.10		
5	64QAM	25	0	16.96	16.98	17.00		

<LTE Band 17 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	18.5	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	17.29	17.21	17.13		
10	QPSK	1	25	17.00	17.02	17.06	17.5	1
10	QPSK	1	49	16.97	16.89	16.88		
10	QPSK	25	0	16.17	16.17	16.15		
10	QPSK	25	12	16.29	16.16	16.03	17.5	1
10	QPSK	25	25	16.16	16.07	16.03		
10	QPSK	50	0	16.16	16.09	16.05		
10	16QAM	1	0	16.41	16.50	16.43	17.5	1
10	16QAM	1	25	16.39	16.33	16.35		
10	16QAM	1	49	16.28	16.33	16.24		
10	16QAM	25	0	15.17	15.18	15.19	16.5	2
10	16QAM	25	12	15.20	15.20	15.06		
10	16QAM	25	25	15.19	15.10	14.98		
10	16QAM	50	0	15.07	15.09	15.08	16.5	2
10	64QAM	1	0	15.19	15.12	15.16		
10	64QAM	1	25	15.13	15.23	15.15		
10	64QAM	1	49	15.12	15.15	15.15	15.5	3
10	64QAM	25	0	14.10	14.21	14.24		
10	64QAM	25	12	14.32	14.15	14.05		
10	64QAM	25	25	14.33	13.93	13.95	15.5	3
10	64QAM	50	0	14.25	14.17	14.06		
Channel				23755	23790	23825	18.5	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	17.25	17.13	17.13		
5	QPSK	1	12	16.91	16.99	16.99	17.5	1
5	QPSK	1	24	16.90	16.80	16.88		
5	QPSK	12	0	16.12	16.16	16.12		
5	QPSK	12	7	16.28	16.14	15.97	17.5	1
5	QPSK	12	13	16.13	16.06	15.95		
5	QPSK	25	0	16.15	16.05	16.01		
5	16QAM	1	0	16.34	16.49	16.41	17.5	1
5	16QAM	1	12	16.38	16.24	16.33		
5	16QAM	1	24	16.19	16.29	16.17		
5	16QAM	12	0	15.11	15.14	15.11	16.5	2
5	16QAM	12	7	15.17	15.10	15.01		
5	16QAM	12	13	15.14	15.10	14.88		
5	16QAM	25	0	15.07	15.08	15.05	16.5	2
5	64QAM	1	0	15.16	15.11	15.13		
5	64QAM	1	12	15.04	15.16	15.12		
5	64QAM	1	24	15.09	15.13	15.06	15.5	3
5	64QAM	12	0	14.05	14.17	14.20		
5	64QAM	12	7	14.22	14.07	14.00		
5	64QAM	12	13	14.26	13.89	13.86	15.5	3
5	64QAM	25	0	14.25	14.13	14.02		



<LTE Band 25 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	15.56	15.46	15.46		
20	QPSK	1	49	15.50	15.40	15.42	16.5	0
20	QPSK	1	99	15.41	15.41	15.31		
20	QPSK	50	0	14.71	14.65	14.62		
20	QPSK	50	24	14.68	14.64	14.55	15.5	1
20	QPSK	50	50	14.55	14.55	14.60		
20	QPSK	100	0	14.70	14.51	14.45		
20	16QAM	1	0	14.65	14.65	14.76	15.5	1
20	16QAM	1	49	14.76	14.64	14.49		
20	16QAM	1	99	14.64	14.69	14.66		
20	16QAM	50	0	13.68	13.60	13.51	14.5	2
20	16QAM	50	24	13.66	13.67	13.49		
20	16QAM	50	50	13.62	13.55	13.64		
20	16QAM	100	0	13.61	13.55	13.49	14.5	2
20	64QAM	1	0	13.51	13.59	13.62		
20	64QAM	1	49	13.48	13.59	13.38		
20	64QAM	1	99	13.53	13.65	13.66	13.5	3
20	64QAM	50	0	12.52	12.54	12.67		
20	64QAM	50	24	12.57	12.60	12.56		
20	64QAM	50	50	12.45	12.40	12.51	13.5	3
20	64QAM	100	0	12.77	12.71	12.55		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	15.53	15.46	15.42		
15	QPSK	1	37	15.40	15.50	15.42	16.5	0
15	QPSK	1	74	15.37	15.46	15.31		
15	QPSK	36	0	14.36	14.45	14.50		
15	QPSK	36	20	14.66	14.54	14.45	15.5	1
15	QPSK	36	39	14.54	14.52	14.56		
15	QPSK	75	0	14.69	14.50	14.44		
15	16QAM	1	0	14.56	14.65	14.67	15.5	1
15	16QAM	1	37	14.75	14.55	14.49		
15	16QAM	1	74	14.57	14.60	14.61		
15	16QAM	36	0	13.64	13.58	13.41	14.5	2
15	16QAM	36	20	13.63	13.58	13.39		
15	16QAM	36	39	13.55	13.45	13.57		
15	16QAM	75	0	13.54	13.51	13.43	14.5	2
15	64QAM	1	0	13.51	13.57	13.56		
15	64QAM	1	37	13.42	13.49	13.36		
15	64QAM	1	74	13.48	13.60	13.63	13.5	3
15	64QAM	36	0	12.50	12.53	12.63		
15	64QAM	36	20	12.48	12.57	12.51		
15	64QAM	36	39	12.36	12.33	12.51	13.5	3
15	64QAM	75	0	12.73	12.61	12.51		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	15.55	15.39	15.38		
10	QPSK	1	25	15.45	15.46	15.41	16.5	0
10	QPSK	1	49	15.39	15.48	15.22		
10	QPSK	25	0	14.39	14.48	14.42		
10	QPSK	25	12	14.61	14.64	14.47	15.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	14.50	14.55	14.55		
10	QPSK	50	0	14.62	14.41	14.36		
10	16QAM	1	0	14.62	14.61	14.75		
10	16QAM	1	25	14.73	14.62	14.40	15.5	1
10	16QAM	1	49	14.60	14.59	14.64		
10	16QAM	25	0	13.58	13.53	13.47		
10	16QAM	25	12	13.60	13.59	13.44	14.5	2
10	16QAM	25	25	13.52	13.45	13.64		
10	16QAM	50	0	13.56	13.50	13.46		
10	64QAM	1	0	13.46	13.51	13.54	14.5	2
10	64QAM	1	25	13.39	13.59	13.30		
10	64QAM	1	49	13.47	13.64	13.58		
10	64QAM	25	0	12.46	12.51	12.60	13.5	3
10	64QAM	25	12	12.51	12.53	12.53		
10	64QAM	25	25	12.39	12.36	12.42		
10	64QAM	50	0	12.73	12.68	12.45		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	15.50	15.37	15.36	16.5	0
5	QPSK	1	12	15.44	15.50	15.46		
5	QPSK	1	24	15.33	15.45	15.24		
5	QPSK	12	0	14.35	14.46	14.42	15.5	1
5	QPSK	12	7	14.59	14.59	14.52		
5	QPSK	12	13	14.45	14.49	14.55		
5	QPSK	25	0	14.68	14.48	14.42		
5	16QAM	1	0	14.59	14.58	14.69	15.5	1
5	16QAM	1	12	14.72	14.57	14.49		
5	16QAM	1	24	14.63	14.64	14.56		
5	16QAM	12	0	13.63	13.54	13.51	14.5	2
5	16QAM	12	7	13.56	13.63	13.42		
5	16QAM	12	13	13.59	13.53	13.62		
5	16QAM	25	0	13.59	13.47	13.49		
5	64QAM	1	0	13.47	13.59	13.54	14.5	2
5	64QAM	1	12	13.40	13.50	13.33		
5	64QAM	1	24	13.47	13.55	13.61		
5	64QAM	12	0	12.44	12.46	12.65	13.5	3
5	64QAM	12	7	12.53	12.59	12.53		
5	64QAM	12	13	12.38	12.31	12.47		
5	64QAM	25	0	12.72	12.68	12.50		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	15.51	15.44	15.42	16.5	0
3	QPSK	1	8	15.48	15.46	15.37		
3	QPSK	1	14	15.33	15.44	15.30		
3	QPSK	8	0	14.40	14.54	14.48	15.5	1
3	QPSK	8	4	14.66	14.64	14.45		
3	QPSK	8	7	14.46	14.48	14.51		
3	QPSK	15	0	14.66	14.48	14.41		
3	16QAM	1	0	14.60	14.56	14.68	15.5	1
3	16QAM	1	8	14.68	14.58	14.40		
3	16QAM	1	14	14.63	14.63	14.65		
3	16QAM	8	0	13.61	13.51	13.49	14.5	2
3	16QAM	8	4	13.57	13.62	13.41		
3	16QAM	8	7	13.61	13.47	13.61		
3	16QAM	15	0	13.61	13.48	13.40		
3	64QAM	1	0	13.49	13.54	13.59	14.5	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	13.38	13.55	13.28	13.5	3
3	64QAM	1	14	13.46	13.63	13.64		
3	64QAM	8	0	12.48	12.48	12.66		
3	64QAM	8	4	12.48	12.58	12.50		
3	64QAM	8	7	12.35	12.40	12.46		
3	64QAM	15	0	12.68	12.61	12.49		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	15.46	15.46	15.40	16.5	0
1.4	QPSK	1	3	15.50	15.46	15.45		
1.4	QPSK	1	5	15.32	15.46	15.24		
1.4	QPSK	3	0	15.14	15.32	15.31		
1.4	QPSK	3	1	15.44	15.38	15.26		
1.4	QPSK	3	3	15.27	15.31	15.38		
1.4	QPSK	6	0	14.62	14.51	14.42	15.5	1
1.4	16QAM	1	0	14.56	14.64	14.71	15.5	1
1.4	16QAM	1	3	14.70	14.62	14.45		
1.4	16QAM	1	5	14.56	14.65	14.62		
1.4	16QAM	3	0	14.45	14.39	14.21		
1.4	16QAM	3	1	14.40	14.43	14.29		
1.4	16QAM	3	3	14.40	14.25	14.35		
1.4	16QAM	6	0	13.55	13.53	13.41	14.5	2
1.4	64QAM	1	0	13.44	13.49	13.55	14.5	2
1.4	64QAM	1	3	13.47	13.49	13.35		
1.4	64QAM	1	5	13.49	13.63	13.64		
1.4	64QAM	3	0	13.30	13.26	13.37		
1.4	64QAM	3	1	13.34	13.31	13.36		
1.4	64QAM	3	3	13.22	13.13	13.29		
1.4	64QAM	6	0	12.77	12.66	12.48	13.5	3

<LTE Band 26 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	20.5	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	20.23	20.24	20.32		
15	QPSK	1	37	20.10	20.20	20.30	19.5	1
15	QPSK	1	74	20.11	20.21	20.17		
15	QPSK	36	0	19.31	19.47	19.33		
15	QPSK	36	20	19.34	19.37	19.48	19.5	1
15	QPSK	36	39	19.31	19.45	19.49		
15	QPSK	75	0	19.34	19.37	19.36		
15	16QAM	1	0	19.48	19.46	19.45	19.5	1
15	16QAM	1	37	19.42	19.42	19.50		
15	16QAM	1	74	19.42	19.46	19.33		
15	16QAM	36	0	18.30	18.37	18.35	18.5	2
15	16QAM	36	20	18.35	18.32	18.48		
15	16QAM	36	39	18.32	18.39	18.47		
15	16QAM	75	0	18.40	18.38	18.45	18.5	2
15	64QAM	1	0	18.29	18.32	18.20		
15	64QAM	1	37	18.15	18.39	18.40		
15	64QAM	1	74	18.15	18.39	18.49	17.5	3
15	64QAM	36	0	17.47	17.50	17.44		
15	64QAM	36	20	17.22	17.33	17.39		
15	64QAM	36	39	17.18	17.31	17.50	17.5	3
15	64QAM	75	0	17.36	17.45	17.46		
Channel				26740	26865	26990	20.5	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	20.14	20.19	20.24		
10	QPSK	1	25	20.10	20.17	20.27	19.5	1
10	QPSK	1	49	20.02	20.19	20.07		
10	QPSK	25	0	19.27	19.27	19.27		
10	QPSK	25	12	19.29	19.32	19.38	19.5	1
10	QPSK	25	25	19.22	19.45	19.41		
10	QPSK	50	0	19.27	19.29	19.47		
10	16QAM	1	0	19.48	19.37	19.39	19.5	1
10	16QAM	1	25	19.32	19.41	19.47		
10	16QAM	1	49	19.33	19.39	19.26		
10	16QAM	25	0	18.22	18.30	18.28	18.5	2
10	16QAM	25	12	18.26	18.31	18.46		
10	16QAM	25	25	18.23	18.31	18.42		
10	16QAM	50	0	18.31	18.31	18.35	18.5	2
10	64QAM	1	0	18.20	18.29	18.17		
10	64QAM	1	25	18.08	18.35	18.34		
10	64QAM	1	49	18.06	18.34	18.44	17.5	3
10	64QAM	25	0	17.37	17.48	17.37		
10	64QAM	25	12	17.22	17.31	17.37		
10	64QAM	25	25	17.16	17.24	17.49	17.5	3
10	64QAM	50	0	17.28	17.39	17.37		
Channel				26715	26865	27015	20.5	0
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	20.19	20.15	20.25		
5	QPSK	1	12	20.05	20.19	20.20	19.5	1
5	QPSK	1	24	20.08	20.11	20.10		
5	QPSK	12	0	19.25	19.27	19.23		
5	QPSK	12	7	19.33	19.31	19.43	19.5	1



FCC SAR TEST REPORT

Report No. : FA092423

5	QPSK	12	13	19.26	19.45	19.42		
5	QPSK	25	0	19.27	19.20	19.42		
5	16QAM	1	0	19.40	19.36	19.42		
5	16QAM	1	12	19.42	19.36	19.41	19.5	1
5	16QAM	1	24	19.35	19.45	19.30		
5	16QAM	12	0	18.25	18.33	18.35		
5	16QAM	12	7	18.30	18.24	18.44	18.5	2
5	16QAM	12	13	18.27	18.39	18.45		
5	16QAM	25	0	18.40	18.30	18.39		
5	64QAM	1	0	18.29	18.28	18.20	18.5	2
5	64QAM	1	12	18.07	18.32	18.34		
5	64QAM	1	24	18.15	18.29	18.40		
5	64QAM	12	0	17.39	17.46	17.37	17.5	3
5	64QAM	12	7	17.19	17.28	17.31		
5	64QAM	12	13	17.15	17.23	17.42		
5	64QAM	25	0	17.27	17.43	17.43		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	20.14	20.16	20.23	20.5	0
3	QPSK	1	8	20.01	20.11	20.22		
3	QPSK	1	14	20.08	20.16	20.07		
3	QPSK	8	0	19.24	19.22	19.32	19.5	1
3	QPSK	8	4	19.29	19.36	19.47		
3	QPSK	8	7	19.25	19.46	19.39		
3	QPSK	15	0	19.33	19.22	19.39	19.5	1
3	16QAM	1	0	19.41	19.44	19.44		
3	16QAM	1	8	19.33	19.34	19.46		
3	16QAM	1	14	19.41	19.43	19.32	18.5	2
3	16QAM	8	0	18.20	18.28	18.29		
3	16QAM	8	4	18.35	18.22	18.42		
3	16QAM	8	7	18.24	18.32	18.38	18.5	2
3	16QAM	15	0	18.36	18.30	18.40		
3	64QAM	1	0	18.23	18.32	18.17		
3	64QAM	1	8	18.05	18.30	18.32	18.5	2
3	64QAM	1	14	18.06	18.38	18.41		
3	64QAM	8	0	17.44	17.40	17.37		
3	64QAM	8	4	17.16	17.28	17.34	17.5	3
3	64QAM	8	7	17.15	17.22	17.42		
3	64QAM	15	0	17.27	17.41	17.38		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	20.13	20.18	20.29	20.5	0
1.4	QPSK	1	3	20.02	20.16	20.23		
1.4	QPSK	1	5	20.04	20.17	20.16		
1.4	QPSK	3	0	20.02	20.07	20.11		
1.4	QPSK	3	1	20.04	20.16	20.22		
1.4	QPSK	3	3	20.02	20.20	20.28		
1.4	QPSK	6	0	19.33	19.20	19.39	19.5	1
1.4	16QAM	1	0	19.41	19.45	19.43	19.5	1
1.4	16QAM	1	3	19.41	19.36	19.45		
1.4	16QAM	1	5	19.42	19.37	19.25		
1.4	16QAM	3	0	19.03	19.16	19.09		
1.4	16QAM	3	1	19.08	19.11	19.18		
1.4	16QAM	3	3	19.08	19.19	19.19		
1.4	16QAM	6	0	18.39	18.36	18.45	18.5	2
1.4	64QAM	1	0	18.22	18.29	18.14	18.5	2



FCC SAR TEST REPORT

Report No. : FA092423

1.4	64QAM	1	3	18.12	18.34	18.31		
1.4	64QAM	1	5	18.07	18.30	18.42		
1.4	64QAM	3	0	18.25	18.25	18.19		
1.4	64QAM	3	1	17.95	18.09	18.15		
1.4	64QAM	3	3	17.94	18.03	18.29		
1.4	64QAM	6	0	17.26	17.37	17.40	17.5	3



<LTE Band 30 Main>

E-UTRA Band 30				Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		13.13		14.5	0
10	QPSK	1	25		12.95			
10	QPSK	1	49		12.96			
10	QPSK	25	0		12.10		13.5	1
10	QPSK	25	12		12.07			
10	QPSK	25	25		12.08			
10	QPSK	50	0		12.12		13.5	1
10	16QAM	1	0		12.46			
10	16QAM	1	25		12.36			
10	16QAM	1	49		12.38		12.5	2
10	16QAM	25	0		11.10			
10	16QAM	25	12		11.11			
10	16QAM	25	25		11.15		12.5	2
10	16QAM	50	0		11.08			
10	64QAM	1	0		11.19			
10	64QAM	1	25		11.29			
10	64QAM	1	49		11.21			
10	64QAM	25	0		10.30		11.5	3
10	64QAM	25	12		10.10			
10	64QAM	25	25		10.11			
10	64QAM	50	0		10.09		11.5	3
Channel				27685	27710	27735		
Frequency (MHz)				2307.5	2310	2312.5	Tune-up limit (dBm)	MPR (dB)
5	QPSK	1	0	13.04	13.08	13.11	14.5	0
5	QPSK	1	12	12.89	12.93	12.94		
5	QPSK	1	24	12.95	12.94	12.88		
5	QPSK	12	0	11.98	12.06	12.06	13.5	1
5	QPSK	12	7	12.05	11.97	12.00		
5	QPSK	12	13	12.18	12.15	12.12		
5	QPSK	25	0	12.09	12.03	12.12	13.5	1
5	16QAM	1	0	12.38	12.40	12.37		
5	16QAM	1	12	12.28	12.29	12.35		
5	16QAM	1	24	12.35	12.32	12.37	12.5	2
5	16QAM	12	0	11.04	11.04	11.01		
5	16QAM	12	7	11.08	11.01	11.10		
5	16QAM	12	13	11.14	11.07	11.09	12.5	2
5	16QAM	25	0	11.00	11.02	11.07		
5	64QAM	1	0	11.12	11.17	11.10		
5	64QAM	1	12	11.28	11.20	11.24	12.5	2
5	64QAM	1	24	11.16	11.12	11.19		
5	64QAM	12	0	10.22	10.30	10.26		
5	64QAM	12	7	10.04	10.06	10.09	11.5	3
5	64QAM	12	13	10.06	10.04	10.01		
5	64QAM	25	0	9.85	9.87	9.84		



<LTE Band 66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	17	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	16.46	16.42	16.61		
20	QPSK	1	49	16.38	16.40	16.47	16	1
20	QPSK	1	99	16.39	16.38	16.49		
20	QPSK	50	0	15.62	15.57	15.65		
20	QPSK	50	24	15.61	15.52	15.55	16	1
20	QPSK	50	50	15.50	15.56	15.56		
20	QPSK	100	0	15.47	15.51	15.60		
20	16QAM	1	0	15.80	15.83	15.93	16	1
20	16QAM	1	49	15.74	15.83	15.89		
20	16QAM	1	99	15.75	15.84	15.81		
20	16QAM	50	0	14.47	14.58	14.73	15	2
20	16QAM	50	24	14.56	14.61	14.64		
20	16QAM	50	50	14.47	14.56	14.61		
20	16QAM	100	0	14.51	14.54	14.62	15	2
20	64QAM	1	0	14.31	14.66	14.77		
20	64QAM	1	49	14.47	14.79	14.72		
20	64QAM	1	99	14.43	14.61	14.49	14	3
20	64QAM	50	0	13.61	13.60	13.69		
20	64QAM	50	24	13.66	13.49	13.54		
20	64QAM	50	50	13.65	13.69	13.46	14	3
20	64QAM	100	0	13.69	13.45	13.60		
Channel				132047	132322	132597	17	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	16.45	16.37	16.52		
15	QPSK	1	37	16.34	16.48	16.45	16	1
15	QPSK	1	74	16.42	16.33	16.42		
15	QPSK	36	0	15.37	15.49	15.62		
15	QPSK	36	20	15.66	15.48	15.64	16	1
15	QPSK	36	39	15.43	15.54	15.47		
15	QPSK	75	0	15.45	15.41	15.51		
15	16QAM	1	0	15.72	15.79	15.85	16	1
15	16QAM	1	37	15.73	15.78	15.88		
15	16QAM	1	74	15.72	15.80	15.79		
15	16QAM	36	0	14.42	14.57	14.73	15	2
15	16QAM	36	20	14.53	14.53	14.62		
15	16QAM	36	39	14.43	14.48	14.60		
15	16QAM	75	0	14.47	14.54	14.52	15	2
15	64QAM	1	0	14.27	14.62	14.74		
15	64QAM	1	37	14.47	14.75	14.72		
15	64QAM	1	74	14.41	14.57	14.47	14	3
15	64QAM	36	0	13.51	13.51	13.68		
15	64QAM	36	20	13.57	13.45	13.46		
15	64QAM	36	39	13.63	13.66	13.41	14	3
15	64QAM	75	0	13.68	13.37	13.50		
Channel				132022	132322	132622	17	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	16.40	16.41	16.60		
10	QPSK	1	25	16.34	16.50	16.43	17	0
10	QPSK	1	49	16.49	16.35	16.46		
10	QPSK	25	0	15.40	15.49	15.62		
10	QPSK	25	12	15.64	15.45	15.60	16	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	15.42	15.55	15.51		
10	QPSK	50	0	15.43	15.44	15.60		
10	16QAM	1	0	15.74	15.80	15.89		
10	16QAM	1	25	15.66	15.82	15.85	16	1
10	16QAM	1	49	15.70	15.83	15.74		
10	16QAM	25	0	14.40	14.49	14.68		
10	16QAM	25	12	14.56	14.56	14.55	15	2
10	16QAM	25	25	14.43	14.51	14.61		
10	16QAM	50	0	14.50	14.44	14.52		
10	64QAM	1	0	14.25	14.64	14.76	15	2
10	64QAM	1	25	14.41	14.76	14.67		
10	64QAM	1	49	14.34	14.56	14.46		
10	64QAM	25	0	13.59	13.55	13.62	14	3
10	64QAM	25	12	13.63	13.46	13.46		
10	64QAM	25	25	13.61	13.63	13.43		
10	64QAM	50	0	13.60	13.35	13.57		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	16.41	16.40	16.54	17	0
5	QPSK	1	12	16.32	16.41	16.45		
5	QPSK	1	24	16.42	16.42	16.48		
5	QPSK	12	0	15.38	15.50	15.55	16	1
5	QPSK	12	7	15.64	15.46	15.59		
5	QPSK	12	13	15.41	15.48	15.53		
5	QPSK	25	0	15.43	15.51	15.54		
5	16QAM	1	0	15.79	15.79	15.85	16	1
5	16QAM	1	12	15.67	15.78	15.89		
5	16QAM	1	24	15.73	15.84	15.79		
5	16QAM	12	0	14.44	14.48	14.71	15	2
5	16QAM	12	7	14.55	14.58	14.59		
5	16QAM	12	13	14.38	14.48	14.57		
5	16QAM	25	0	14.42	14.48	14.60		
5	64QAM	1	0	14.26	14.60	14.68	15	2
5	64QAM	1	12	14.37	14.78	14.63		
5	64QAM	1	24	14.40	14.52	14.46		
5	64QAM	12	0	13.54	13.59	13.61	14	3
5	64QAM	12	7	13.60	13.42	13.44		
5	64QAM	12	13	13.60	13.65	13.40		
5	64QAM	25	0	13.64	13.43	13.55		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	16.38	16.32	16.57	17	0
3	QPSK	1	8	16.29	16.49	16.39		
3	QPSK	1	14	16.49	16.32	16.47		
3	QPSK	8	0	15.47	15.47	15.56	16	1
3	QPSK	8	4	15.60	15.46	15.61		
3	QPSK	8	7	15.42	15.50	15.47		
3	QPSK	15	0	15.39	15.50	15.60		
3	16QAM	1	0	15.71	15.79	15.93	16	1
3	16QAM	1	8	15.69	15.73	15.80		
3	16QAM	1	14	15.69	15.80	15.79		
3	16QAM	8	0	14.39	14.48	14.71	15	2
3	16QAM	8	4	14.50	14.55	14.56		
3	16QAM	8	7	14.42	14.49	14.57		
3	16QAM	15	0	14.43	14.51	14.57		
3	64QAM	1	0	14.23	14.58	14.73	15	2



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	14.41	14.74	14.65		
3	64QAM	1	14	14.39	14.59	14.41		
3	64QAM	8	0	13.60	13.52	13.68	14	3
3	64QAM	8	4	13.62	13.41	13.54		
3	64QAM	8	7	13.59	13.64	13.38		
3	64QAM	15	0	13.69	13.36	13.52		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	16.38	16.32	16.53	17	0
1.4	QPSK	1	3	16.28	16.50	16.44		
1.4	QPSK	1	5	16.46	16.40	16.40		
1.4	QPSK	3	0	16.22	16.29	16.40		
1.4	QPSK	3	1	16.42	16.26	16.40		
1.4	QPSK	3	3	16.20	16.30	16.36		
1.4	QPSK	6	0	15.44	15.42	15.51	16	1
1.4	16QAM	1	0	15.78	15.83	15.86	16	1
1.4	16QAM	1	3	15.68	15.83	15.84		
1.4	16QAM	1	5	15.65	15.78	15.72		
1.4	16QAM	3	0	15.25	15.34	15.52		
1.4	16QAM	3	1	15.32	15.41	15.35		
1.4	16QAM	3	3	15.19	15.30	15.39		
1.4	16QAM	6	0	14.45	14.46	14.61	15	2
1.4	64QAM	1	0	14.28	14.59	14.77	15	2
1.4	64QAM	1	3	14.37	14.74	14.67		
1.4	64QAM	1	5	14.33	14.54	14.41		
1.4	64QAM	3	0	14.35	14.33	14.49		
1.4	64QAM	3	1	14.36	14.29	14.24		
1.4	64QAM	3	3	14.41	14.47	14.24		
1.4	64QAM	6	0	13.64	13.35	13.58	14	3



<LTE Band 66 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	11.5	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	11.12	11.14	11.19		
20	QPSK	1	49	10.91	11.00	10.95	11.5	0
20	QPSK	1	99	11.07	11.13	11.09		
20	QPSK	50	0	10.89	11.01	10.97		
20	QPSK	50	24	10.99	11.02	11.00	11.5	0
20	QPSK	50	50	11.03	11.10	11.10		
20	QPSK	100	0	10.88	10.96	10.95		
20	16QAM	1	0	10.94	11.03	10.99	11.5	0
20	16QAM	1	49	10.82	10.86	10.81		
20	16QAM	1	99	10.99	11.10	11.05		
20	16QAM	50	0	10.92	11.02	11.06	11.5	0
20	16QAM	50	24	11.02	11.04	11.01		
20	16QAM	50	50	11.05	11.09	11.08		
20	16QAM	100	0	10.89	10.97	11.00	11.5	0
20	64QAM	1	0	10.80	10.86	10.85		
20	64QAM	1	49	10.64	10.74	10.73		
20	64QAM	1	99	10.85	10.93	10.94	11.5	0
20	64QAM	50	0	10.98	11.03	11.04		
20	64QAM	50	24	10.90	10.98	10.99		
20	64QAM	50	50	11.00	11.08	11.06	11.5	0
20	64QAM	100	0	10.91	10.98	10.99		
Channel				132047	132322	132597	11.5	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	11.02	11.04	11.09		
15	QPSK	1	37	10.95	10.94	11.01	11.5	0
15	QPSK	1	74	11.11	11.06	11.17		
15	QPSK	36	0	10.99	11.01	10.95		
15	QPSK	36	20	10.94	10.92	11.06	11.5	0
15	QPSK	36	39	11.05	11.03	11.11		
15	QPSK	75	0	10.85	10.93	10.94		
15	16QAM	1	0	11.01	10.96	11.03	11.5	0
15	16QAM	1	37	10.75	10.81	10.80		
15	16QAM	1	74	10.98	11.05	11.04		
15	16QAM	36	0	10.94	11.02	10.96	11.5	0
15	16QAM	36	20	10.92	10.99	11.07		
15	16QAM	36	39	11.02	11.09	11.06		
15	16QAM	75	0	10.94	10.93	10.99	11.5	0
15	64QAM	1	0	10.77	10.85	10.81		
15	64QAM	1	37	10.70	10.69	10.74		
15	64QAM	1	74	10.88	10.85	10.89	11.5	0
15	64QAM	36	0	10.92	11.02	10.98		
15	64QAM	36	20	10.88	10.88	11.00		
15	64QAM	36	39	10.97	11.06	11.03	11.5	0
15	64QAM	75	0	10.93	10.88	10.95		
Channel				132022	132322	132622	11.5	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	11.06	11.11	11.12		
10	QPSK	1	25	10.97	10.95	11.00	11.5	0
10	QPSK	1	49	11.02	11.12	11.08		
10	QPSK	25	0	10.99	10.97	10.99		
10	QPSK	25	12	10.90	11.00	11.02	11.5	0



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	11.02	11.03	11.12		
10	QPSK	50	0	10.91	10.93	10.93		
10	16QAM	1	0	10.91	10.94	11.05		
10	16QAM	1	25	10.82	10.78	10.89	11.5	0
10	16QAM	1	49	11.01	11.07	11.12		
10	16QAM	25	0	10.93	10.96	10.99		
10	16QAM	25	12	10.94	11.02	10.98	11.5	0
10	16QAM	25	25	11.02	11.03	11.04		
10	16QAM	50	0	10.92	10.90	10.97		
10	64QAM	1	0	10.74	10.85	10.81	11.5	0
10	64QAM	1	25	10.64	10.74	10.73		
10	64QAM	1	49	10.85	10.93	10.92		
10	64QAM	25	0	10.99	11.01	11.03	11.5	0
10	64QAM	25	12	10.94	10.88	10.99		
10	64QAM	25	25	10.99	11.05	11.12		
10	64QAM	50	0	10.95	10.95	10.95		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	11.05	11.08	11.16	11.5	0
5	QPSK	1	12	10.88	10.94	10.96		
5	QPSK	1	24	11.05	11.04	11.10		
5	QPSK	12	0	10.93	11.00	11.04	11.5	0
5	QPSK	12	7	10.92	11.00	11.03		
5	QPSK	12	13	11.01	11.07	11.14		
5	QPSK	25	0	10.93	10.90	10.90	11.5	0
5	16QAM	1	0	10.91	10.99	11.06		
5	16QAM	1	12	10.83	10.76	10.84		
5	16QAM	1	24	10.98	11.07	11.10	11.5	0
5	16QAM	12	0	10.90	10.97	11.03		
5	16QAM	12	7	10.99	11.00	11.01		
5	16QAM	12	13	11.00	11.02	11.03	11.5	0
5	16QAM	25	0	10.93	10.90	10.91		
5	64QAM	1	0	10.79	10.85	10.80		
5	64QAM	1	12	10.67	10.71	10.72	11.5	0
5	64QAM	1	24	10.85	10.85	10.92		
5	64QAM	12	0	10.94	11.00	11.07		
5	64QAM	12	7	10.89	10.98	10.96	11.5	0
5	64QAM	12	13	11.01	11.01	11.07		
5	64QAM	25	0	10.92	10.95	10.97		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	11.09	11.10	11.10	11.5	0
3	QPSK	1	8	10.98	10.96	10.99		
3	QPSK	1	14	11.08	11.08	11.07		
3	QPSK	8	0	10.92	10.95	11.02	11.5	0
3	QPSK	8	4	10.95	10.94	10.97		
3	QPSK	8	7	11.07	11.04	11.10		
3	QPSK	15	0	10.86	10.94	10.92	11.5	0
3	16QAM	1	0	10.98	10.95	11.01		
3	16QAM	1	8	10.83	10.82	10.89		
3	16QAM	1	14	11.04	11.05	11.05	11.5	0
3	16QAM	8	0	10.93	10.97	11.00		
3	16QAM	8	4	10.99	11.02	11.00		
3	16QAM	8	7	10.99	11.06	11.11	11.5	0
3	16QAM	15	0	10.93	10.94	11.00		
3	64QAM	1	0	10.75	10.85	10.90	11.5	0



FCC SAR TEST REPORT

Report No. : FA092423

3	64QAM	1	8	10.64	10.65	10.75	11.5	0
3	64QAM	1	14	10.84	10.88	10.88		
3	64QAM	8	0	10.93	11.01	11.04		
3	64QAM	8	4	10.91	10.93	11.02		
3	64QAM	8	7	10.96	10.98	11.08		
3	64QAM	15	0	10.94	10.98	10.93		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	11.02	11.11	11.10	11.5	0
1.4	QPSK	1	3	10.88	10.99	11.01		
1.4	QPSK	1	5	11.03	11.07	11.16		
1.4	QPSK	3	0	10.90	10.96	10.96		
1.4	QPSK	3	1	10.95	10.97	10.97		
1.4	QPSK	3	3	11.07	11.01	11.05		
1.4	QPSK	6	0	10.93	10.95	10.90	11.5	1
1.4	16QAM	1	0	10.98	10.93	11.06	11.5	1
1.4	16QAM	1	3	10.80	10.81	10.84		
1.4	16QAM	1	5	11.06	11.04	11.14		
1.4	16QAM	3	0	10.96	10.93	10.97		
1.4	16QAM	3	1	10.94	10.94	10.98		
1.4	16QAM	3	3	11.05	11.02	11.11		
1.4	16QAM	6	0	10.86	10.91	11.01	11.5	2
1.4	64QAM	1	0	10.84	10.77	10.88	11.5	2
1.4	64QAM	1	3	10.62	10.68	10.70		
1.4	64QAM	1	5	10.88	10.89	10.95		
1.4	64QAM	3	0	10.93	11.00	11.02		
1.4	64QAM	3	1	10.92	10.97	10.93		
1.4	64QAM	3	3	11.02	11.07	11.03		
1.4	64QAM	6	0	10.96	10.88	10.98	11.5	3



<LTE Band 71 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372	18.5	0
Frequency (MHz)				673	683	688		
20	QPSK	1	0	18.43	18.28	18.19		
20	QPSK	1	49	18.18	18.24	18.15	17.5	1
20	QPSK	1	99	18.08	18.22	18.16		
20	QPSK	50	0	17.46	17.39	17.29		
20	QPSK	50	24	17.44	17.30	17.26	17.5	1
20	QPSK	50	50	17.39	17.38	17.28		
20	QPSK	100	0	17.40	17.26	17.33		
20	16QAM	1	0	17.50	17.45	17.30	17.5	1
20	16QAM	1	49	17.25	17.48	17.48		
20	16QAM	1	99	17.29	17.44	17.41		
20	16QAM	50	0	16.44	16.24	16.30	16.5	2
20	16QAM	50	24	16.41	16.20	16.30		
20	16QAM	50	50	16.36	16.23	16.33		
20	16QAM	100	0	16.25	16.24	16.23	16.5	2
20	64QAM	1	0	16.36	16.28	16.49		
20	64QAM	1	49	16.48	16.25	16.24		
20	64QAM	1	99	16.41	16.08	16.49	15.5	3
20	64QAM	50	0	15.47	15.31	15.38		
20	64QAM	50	24	15.27	15.17	15.49		
20	64QAM	50	50	15.24	15.18	15.16	15.5	3
20	64QAM	100	0	15.41	15.41	15.43		
Channel				133197	133297	133397	18.5	0
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	18.42	18.24	18.09		
15	QPSK	1	37	18.13	18.22	18.11	17.5	1
15	QPSK	1	74	17.98	18.19	18.10		
15	QPSK	36	0	17.27	17.27	17.15		
15	QPSK	36	20	17.36	17.26	17.20	17.5	1
15	QPSK	36	39	17.35	17.28	17.32		
15	QPSK	75	0	17.31	17.23	17.27		
15	16QAM	1	0	17.43	17.43	17.25	17.5	1
15	16QAM	1	37	17.25	17.42	17.46		
15	16QAM	1	74	17.29	17.38	17.32		
15	16QAM	36	0	16.34	16.20	16.25	16.5	2
15	16QAM	36	20	16.38	16.13	16.22		
15	16QAM	36	39	16.28	16.20	16.25		
15	16QAM	75	0	16.24	16.20	16.21	16.5	2
15	64QAM	1	0	16.30	16.27	16.46		
15	64QAM	1	37	16.39	16.15	16.21		
15	64QAM	1	74	16.32	16.07	16.46	15.5	3
15	64QAM	36	0	15.38	15.31	15.29		
15	64QAM	36	20	15.27	15.14	15.41		
15	64QAM	36	39	15.18	15.14	15.10	15.5	3
15	64QAM	75	0	15.39	15.39	15.36		
Channel				133172	133272	133422	18.5	0
Frequency (MHz)				668	678	693		
10	QPSK	1	0	18.35	18.27	18.18		
10	QPSK	1	25	18.10	18.16	18.15	17.5	1
10	QPSK	1	49	18.04	18.18	18.07		
10	QPSK	25	0	17.34	17.25	17.12		
10	QPSK	25	12	17.40	17.29	17.20	17.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	17.36	17.29	17.31		
10	QPSK	50	0	17.35	17.19	17.23		
10	16QAM	1	0	17.45	17.35	17.21		
10	16QAM	1	25	17.16	17.48	17.40	17.5	1
10	16QAM	1	49	17.22	17.42	17.32		
10	16QAM	25	0	16.40	16.21	16.23		
10	16QAM	25	12	16.38	16.20	16.27	16.5	2
10	16QAM	25	25	16.35	16.13	16.24		
10	16QAM	50	0	16.17	16.14	16.18		
10	64QAM	1	0	16.27	16.23	16.43	16.5	2
10	64QAM	1	25	16.38	16.15	16.23		
10	64QAM	1	49	16.36	16.08	16.40		
10	64QAM	25	0	15.39	15.31	15.37	15.5	3
10	64QAM	25	12	15.17	15.07	15.44		
10	64QAM	25	25	15.21	15.10	15.09		
10	64QAM	50	0	15.41	15.40	15.43		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	18.40	18.26	18.11	18.5	0
5	QPSK	1	12	18.08	18.17	18.14		
5	QPSK	1	24	18.05	18.19	18.15		
5	QPSK	12	0	17.30	17.28	17.14	17.5	1
5	QPSK	12	7	17.34	17.23	17.16		
5	QPSK	12	13	17.39	17.34	17.36		
5	QPSK	25	0	17.32	17.21	17.32	17.5	1
5	16QAM	1	0	17.45	17.40	17.25		
5	16QAM	1	12	17.25	17.43	17.44		
5	16QAM	1	24	17.20	17.34	17.34	16.5	2
5	16QAM	12	0	16.41	16.21	16.29		
5	16QAM	12	7	16.40	16.18	16.27		
5	16QAM	12	13	16.30	16.19	16.31	16.5	2
5	16QAM	25	0	16.16	16.16	16.21		
5	64QAM	1	0	16.31	16.19	16.49		
5	64QAM	1	12	16.43	16.17	16.20	15.5	3
5	64QAM	1	24	16.33	16.04	16.39		
5	64QAM	12	0	15.41	15.27	15.33		
5	64QAM	12	7	15.23	15.09	15.48	15.5	3
5	64QAM	12	13	15.20	15.11	15.13		
5	64QAM	25	0	15.34	15.37	15.35		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

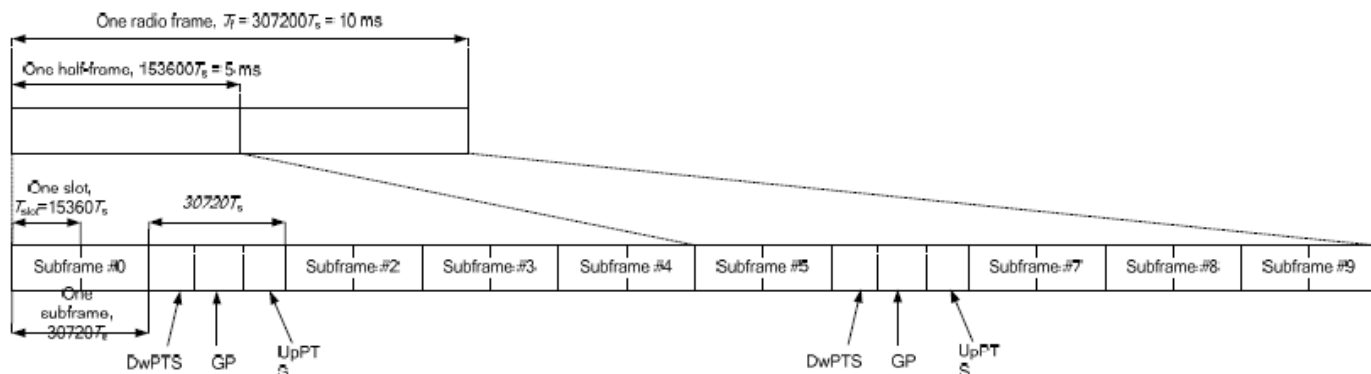


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- The device supports Power Class 3 uplink-downlink configurations 0 and 6, and Power Class 2 uplink-downlink configurations 1 to 5 operations for LTE Band 41.
- The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1, for Power Class 3 operation is 63.3% using UL-DL configuration 0. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR among all exposure condition.

Default Power Mode
<LTE Band 38 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.72	23.89	23.73	24	0
20	QPSK	1	49	23.65	23.84	23.66		
20	QPSK	1	99	23.71	23.85	23.64		
20	QPSK	50	0	22.90	22.97	22.94	23	1
20	QPSK	50	24	22.94	22.98	22.91		
20	QPSK	50	50	22.97	22.98	22.87		
20	QPSK	100	0	22.95	22.95	22.89	23	1
20	16QAM	1	0	22.77	22.96	22.80		
20	16QAM	1	49	22.83	22.86	22.69		
20	16QAM	1	99	22.85	22.82	22.83	22	2
20	16QAM	50	0	21.89	21.97	21.94		
20	16QAM	50	24	21.99	21.95	21.91		
20	16QAM	50	50	21.97	21.99	21.88	22	2
20	16QAM	100	0	21.98	21.95	21.91		
20	64QAM	1	0	21.66	21.74	21.62		
20	64QAM	1	49	21.74	21.81	21.72	22	2
20	64QAM	1	99	21.85	21.86	21.68		
20	64QAM	50	0	20.90	20.95	20.95		
20	64QAM	50	24	21.00	20.98	20.95	21	3
20	64QAM	50	50	21.00	20.89	20.89		
20	64QAM	100	0	20.98	20.96	20.95		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.62	23.87	23.71	24	0
15	QPSK	1	37	23.68	23.81	23.72		
15	QPSK	1	74	23.75	23.77	23.62		
15	QPSK	36	0	22.86	22.87	22.90	23	1
15	QPSK	36	20	22.90	22.97	22.88		
15	QPSK	36	39	22.97	22.92	22.81		
15	QPSK	75	0	22.95	22.87	22.79	23	1
15	16QAM	1	0	22.69	22.96	22.76		
15	16QAM	1	37	22.76	22.84	22.64		
15	16QAM	1	74	22.80	22.77	22.76	22	2
15	16QAM	36	0	21.89	21.90	21.90		
15	16QAM	36	20	21.89	21.85	21.85		
15	16QAM	36	39	21.90	21.92	21.88	22	2
15	16QAM	75	0	21.97	21.91	21.88		
15	64QAM	1	0	21.58	21.67	21.54		
15	64QAM	1	37	21.66	21.79	21.69	22	2
15	64QAM	1	74	21.77	21.79	21.67		
15	64QAM	36	0	20.80	20.89	20.89		
15	64QAM	36	20	20.90	20.93	20.85	21	3
15	64QAM	36	39	21.00	20.89	20.79		
15	64QAM	75	0	20.95	20.87	20.87		
Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.71	23.85	23.68	24	0
10	QPSK	1	25	23.74	23.82	23.71		
10	QPSK	1	49	23.77	23.83	23.58		
10	QPSK	25	0	22.86	22.87	22.93	23	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	12	22.90	22.94	22.89		
10	QPSK	25	25	22.90	22.97	22.80		
10	QPSK	50	0	22.93	22.88	22.89		
10	16QAM	1	0	22.71	22.93	22.71	23	1
10	16QAM	1	25	22.74	22.76	22.59		
10	16QAM	1	49	22.77	22.79	22.83		
10	16QAM	25	0	21.85	21.94	21.90	22	2
10	16QAM	25	12	21.89	21.85	21.83		
10	16QAM	25	25	21.91	21.96	21.82		
10	16QAM	50	0	21.97	21.89	21.87	22	2
10	64QAM	1	0	21.58	21.66	21.56		
10	64QAM	1	25	21.74	21.77	21.66		
10	64QAM	1	49	21.76	21.84	21.59	21	3
10	64QAM	25	0	20.82	20.91	20.89		
10	64QAM	25	12	20.92	20.90	20.86		
10	64QAM	25	25	20.91	20.85	20.83	Tune-up limit (dBm)	MPR (dB)
10	64QAM	50	0	20.92	20.88	20.91		
Channel				37775	38000	38225		
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.68	23.83	23.72	24	0
5	QPSK	1	12	23.67	23.82	23.66		
5	QPSK	1	24	23.82	23.83	23.64		
5	QPSK	12	0	22.81	22.95	22.88	23	1
5	QPSK	12	7	22.91	22.92	22.85		
5	QPSK	12	13	22.94	22.91	22.78		
5	QPSK	25	0	22.89	22.87	22.84	23	1
5	16QAM	1	0	22.73	22.89	22.80		
5	16QAM	1	12	22.79	22.78	22.59		
5	16QAM	1	24	22.85	22.80	22.80	22	2
5	16QAM	12	0	21.85	21.92	21.94		
5	16QAM	12	7	21.91	21.89	21.90		
5	16QAM	12	13	21.91	21.95	21.82	22	2
5	16QAM	25	0	21.88	21.90	21.87		
5	64QAM	1	0	21.58	21.70	21.52		
5	64QAM	1	12	21.71	21.80	21.66	22	2
5	64QAM	1	24	21.85	21.81	21.60		
5	64QAM	12	0	20.86	20.87	20.89		
5	64QAM	12	7	20.92	20.91	20.86	21	3
5	64QAM	12	13	20.98	20.79	20.87		
5	64QAM	25	0	20.93	20.92	20.95		



<LTE Band 41 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	24	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.81	23.79	23.90	23.78	23.67		
20	QPSK	1	49	23.80	23.78	23.76	23.69	23.55	24	0
20	QPSK	1	99	23.78	23.78	23.83	23.70	23.58		
20	QPSK	50	0	22.96	22.95	22.99	22.88	22.79		
20	QPSK	50	24	22.90	22.94	22.96	22.86	22.75	23	1
20	QPSK	50	50	22.95	22.93	22.93	22.83	22.72		
20	QPSK	100	0	22.98	22.97	22.99	22.84	22.76		
20	16QAM	1	0	22.95	22.89	22.97	22.84	22.77	23	1
20	16QAM	1	49	22.84	22.85	22.85	22.75	22.63		
20	16QAM	1	99	22.89	22.84	22.96	22.76	22.66		
20	16QAM	50	0	21.91	21.95	21.86	21.88	21.71	22	2
20	16QAM	50	24	21.92	21.99	21.95	21.85	21.76		
20	16QAM	50	50	21.98	21.96	21.93	21.86	21.72		
20	16QAM	100	0	21.91	21.98	21.93	21.86	21.75	22	2
20	64QAM	1	0	21.81	21.70	21.80	21.60	21.36		
20	64QAM	1	49	21.88	21.87	21.81	21.54	21.36		
20	64QAM	1	99	21.80	21.81	21.85	21.50	21.38	21	3
20	64QAM	50	0	20.91	20.98	20.90	20.92	20.74		
20	64QAM	50	24	20.94	21.00	20.97	20.90	20.79		
20	64QAM	50	50	21.00	20.99	20.94	20.88	20.73	21	3
20	64QAM	100	0	20.92	20.99	20.96	20.88	20.76		
Channel				39725	40173	40620	41068	41515	24	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.81	23.77	23.79	23.69	23.59		
15	QPSK	1	37	23.74	23.76	23.69	23.64	23.53	24	0
15	QPSK	1	74	23.71	23.70	23.78	23.70	23.57		
15	QPSK	36	0	22.97	22.94	22.85	22.86	22.63	23	1
15	QPSK	36	20	22.92	22.91	22.88	22.79	22.67		
15	QPSK	36	39	22.90	22.89	22.85	22.82	22.64		
15	QPSK	75	0	22.96	22.95	22.89	22.81	22.73	23	1
15	16QAM	1	0	22.95	22.81	22.96	22.76	22.73		
15	16QAM	1	37	22.81	22.84	22.75	22.65	22.58		
15	16QAM	1	74	22.83	22.79	22.86	22.69	22.66	22	2
15	16QAM	36	0	21.95	21.92	21.77	21.80	21.67		
15	16QAM	36	20	21.96	21.95	21.87	21.82	21.71		
15	16QAM	36	39	21.97	21.94	21.89	21.76	21.72	22	2
15	16QAM	75	0	21.92	21.95	21.90	21.79	21.69		
15	64QAM	1	0	21.80	21.65	21.71	21.57	21.34		
15	64QAM	1	37	21.86	21.85	21.71	21.48	21.32	22	2
15	64QAM	1	74	21.80	21.80	21.82	21.44	21.35		
15	64QAM	36	0	20.95	20.93	20.85	20.90	20.68		
15	64QAM	36	20	20.92	20.90	20.97	20.82	20.76	21	3
15	64QAM	36	39	20.93	20.97	20.94	20.87	20.72		
15	64QAM	75	0	20.94	20.96	20.96	20.83	20.74		
Channel				39700	40160	40620	41080	41540	24	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.74	23.68	23.85	23.68	23.58		
10	QPSK	1	25	23.74	23.74	23.70	23.62	23.52	24	0
10	QPSK	1	49	23.77	23.68	23.81	23.66	23.52		
10	QPSK	25	0	22.89	22.88	22.85	22.84	22.69	23	1
10	QPSK	25	12	22.93	22.91	22.86	22.77	22.73		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	22.90	22.86	22.91	22.80	22.63		
10	QPSK	50	0	22.96	22.94	22.94	22.82	22.74		
10	16QAM	1	0	22.86	22.84	22.92	22.74	22.75		
10	16QAM	1	25	22.80	22.85	22.85	22.66	22.63	23	1
10	16QAM	1	49	22.79	22.80	22.87	22.70	22.60		
10	16QAM	25	0	21.96	21.89	21.79	21.78	21.70		
10	16QAM	25	12	21.91	21.94	21.88	21.78	21.74	22	2
10	16QAM	25	25	21.98	21.86	21.88	21.85	21.64		
10	16QAM	50	0	21.92	21.89	21.83	21.85	21.65		
10	64QAM	1	0	21.71	21.61	21.74	21.50	21.34	22	2
10	64QAM	1	25	21.82	21.84	21.77	21.53	21.35		
10	64QAM	1	49	21.76	21.81	21.76	21.45	21.35		
10	64QAM	25	0	20.93	20.88	20.83	20.82	20.73	21	3
10	64QAM	25	12	20.98	20.91	20.91	20.82	20.76		
10	64QAM	25	25	20.94	20.92	20.87	20.88	20.66		
10	64QAM	50	0	20.95	20.93	20.92	20.79	20.66		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.77	23.77	23.82	23.76	23.67	24	0
5	QPSK	1	12	23.80	23.69	23.68	23.61	23.52		
5	QPSK	1	24	23.77	23.74	23.81	23.63	23.52		
5	QPSK	12	0	22.89	22.95	22.77	22.87	22.64	23	1
5	QPSK	12	7	22.98	22.88	22.90	22.77	22.70		
5	QPSK	12	13	22.92	22.83	22.84	22.78	22.62		
5	QPSK	25	0	22.88	22.88	22.93	22.74	22.75	23	1
5	16QAM	1	0	22.94	22.87	22.96	22.80	22.67		
5	16QAM	1	12	22.76	22.82	22.75	22.72	22.56		
5	16QAM	1	24	22.86	22.83	22.95	22.76	22.62	22	2
5	16QAM	12	0	21.95	21.90	21.84	21.84	21.65		
5	16QAM	12	7	21.94	21.95	21.94	21.77	21.75		
5	16QAM	12	13	21.90	21.95	21.91	21.83	21.64	22	2
5	16QAM	25	0	21.96	21.92	21.85	21.85	21.74		
5	64QAM	1	0	21.73	21.65	21.78	21.59	21.34		
5	64QAM	1	12	21.87	21.85	21.80	21.48	21.36	22	2
5	64QAM	1	24	21.71	21.72	21.81	21.47	21.35		
5	64QAM	12	0	20.95	20.97	20.80	20.83	20.68		
5	64QAM	12	7	20.94	20.93	20.95	20.86	20.79	21	3
5	64QAM	12	13	20.90	20.93	20.86	20.79	20.63		
5	64QAM	25	0	20.97	20.92	20.92	20.86	20.75		

<LTE Band 41 HPUE>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	26.34	26.26	26.30	26.25	25.72	27	0
20	QPSK	1	49	26.33	26.26	26.21	26.17	25.41		
20	QPSK	1	99	26.33	26.25	26.23	26.21	24.57		
20	QPSK	50	0	25.62	25.62	25.54	25.53	24.85	26	1
20	QPSK	50	24	25.54	25.57	25.40	25.48	24.52		
20	QPSK	50	50	25.62	25.56	25.49	25.46	24.01		
20	QPSK	100	0	25.58	25.57	25.52	25.46	24.46	26	1
20	16QAM	1	0	25.73	25.60	25.68	25.65	24.99		
20	16QAM	1	49	25.70	25.57	25.59	25.53	24.68		
20	16QAM	1	99	25.72	25.59	25.59	25.62	24.35	25	2
20	16QAM	50	0	24.64	24.57	24.47	24.52	23.95		
20	16QAM	50	24	24.66	24.61	24.54	24.51	23.64		
20	16QAM	50	50	24.64	24.58	24.51	24.50	23.28	25	2
20	16QAM	100	0	24.67	24.58	24.52	24.50	23.54		
20	64QAM	1	0	24.45	24.41	24.04	23.69	23.38		
20	64QAM	1	49	24.53	24.45	23.99	23.87	23.15	25	2
20	64QAM	1	99	24.58	24.48	24.01	23.70	23.04		
20	64QAM	50	0	23.66	23.57	23.10	22.92	22.03		
20	64QAM	50	24	23.67	23.62	23.05	22.96	22.16	24	3
20	64QAM	50	50	23.66	23.57	23.06	23.00	22.08		
20	64QAM	100	0	23.68	23.59	22.99	22.83	22.11		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	26.28	26.24	26.22	26.21	25.66	27	0
15	QPSK	1	37	26.24	26.24	26.19	26.11	25.40		
15	QPSK	1	74	26.32	26.20	26.23	26.17	24.47		
15	QPSK	36	0	25.54	25.62	25.49	25.52	24.84	26	1
15	QPSK	36	20	25.52	25.57	25.31	25.39	24.42		
15	QPSK	36	39	25.58	25.48	25.41	25.36	24.45		
15	QPSK	75	0	25.57	25.52	25.46	25.41	24.38	26	1
15	16QAM	1	0	25.69	25.51	25.67	25.65	24.98		
15	16QAM	1	37	25.68	25.49	25.53	25.52	24.60		
15	16QAM	1	74	25.65	25.56	25.54	25.55	24.28	25	2
15	16QAM	36	0	24.55	24.52	24.47	24.51	23.90		
15	16QAM	36	20	24.64	24.56	24.48	24.44	23.62		
15	16QAM	36	39	24.64	24.49	24.45	24.48	23.18	25	2
15	16QAM	75	0	24.59	24.55	24.42	24.40	23.53		
15	64QAM	1	0	24.37	24.40	24.04	23.63	23.30		
15	64QAM	1	37	24.49	24.43	23.98	23.83	23.09	25	2
15	64QAM	1	74	24.48	24.47	23.95	23.62	23.46		
15	64QAM	36	0	23.58	23.57	23.08	22.90	22.35		
15	64QAM	36	20	23.67	23.62	23.00	22.90	22.12	24	3
15	64QAM	36	39	23.64	23.48	22.99	22.95	22.02		
15	64QAM	75	0	23.64	23.51	22.95	22.75	22.02		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	26.29	26.19	26.27	26.25	25.67	27	0
10	QPSK	1	25	26.27	26.23	26.11	26.07	25.37		
10	QPSK	1	49	26.32	26.20	26.15	26.12	24.47		
10	QPSK	25	0	25.62	25.60	25.45	25.51	24.85	26	1
10	QPSK	25	12	25.52	25.55	25.32	25.41	24.50		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	25.53	25.47	25.41	25.45	24.48		
10	QPSK	50	0	25.54	25.48	25.49	25.45	24.36		
10	16QAM	1	0	25.73	25.52	25.58	25.62	24.97		
10	16QAM	1	25	25.65	25.47	25.57	25.50	24.68	26	1
10	16QAM	1	49	25.63	25.52	25.56	25.62	24.32		
10	16QAM	25	0	24.60	24.49	24.45	24.51	23.87		
10	16QAM	25	12	24.65	24.54	24.48	24.45	23.54	25	2
10	16QAM	25	25	24.60	24.55	24.49	24.48	23.25		
10	16QAM	50	0	24.67	24.57	24.46	24.46	23.47		
10	64QAM	1	0	24.38	24.35	23.97	23.62	23.29	25	2
10	64QAM	1	25	24.52	24.40	23.96	23.87	23.13		
10	64QAM	1	49	24.56	24.41	23.91	23.62	23.44		
10	64QAM	25	0	23.60	23.53	23.03	22.91	22.43	24	3
10	64QAM	25	12	23.57	23.61	23.00	22.91	22.06		
10	64QAM	25	25	23.56	23.54	22.96	22.98	22.02		
10	64QAM	50	0	23.66	23.49	22.97	22.81	22.10		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	26.33	26.17	26.28	26.19	25.66	27	0
5	QPSK	1	12	26.28	26.17	26.13	26.13	25.38		
5	QPSK	1	24	26.31	26.25	26.15	26.17	24.54		
5	QPSK	12	0	25.55	25.59	25.44	25.46	24.85	26	1
5	QPSK	12	7	25.44	25.56	25.34	25.45	24.42		
5	QPSK	12	13	25.61	25.46	25.46	25.37	24.45		
5	QPSK	25	0	25.53	25.55	25.44	25.41	24.38		
5	16QAM	1	0	25.71	25.53	25.59	25.60	24.96	26	1
5	16QAM	1	12	25.67	25.49	25.56	25.52	24.59		
5	16QAM	1	24	25.65	25.56	25.51	25.61	24.33		
5	16QAM	12	0	24.58	24.53	24.43	24.46	23.86	25	2
5	16QAM	12	7	24.56	24.59	24.53	24.42	23.62		
5	16QAM	12	13	24.58	24.48	24.45	24.46	23.27		
5	16QAM	25	0	24.63	24.48	24.50	24.47	23.54		
5	64QAM	1	0	24.39	24.35	23.99	23.62	23.34	25	2
5	64QAM	1	12	24.43	24.36	23.91	23.82	23.14		
5	64QAM	1	24	24.49	24.42	23.95	23.70	23.49		
5	64QAM	12	0	23.59	23.49	23.00	22.87	22.45	24	3
5	64QAM	12	7	23.66	23.56	22.97	22.94	22.11		
5	64QAM	12	13	23.64	23.50	23.05	22.99	22.02		
5	64QAM	25	0	23.66	23.59	22.96	22.75	22.08		

<LTE Band 48 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640		
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	21.01	20.80	20.69	20.53	22	0
20	QPSK	1	49	20.92	20.67	20.58	20.39		
20	QPSK	1	99	20.97	20.78	20.64	20.47		
20	QPSK	50	0	20.07	19.83	19.75	19.55	21	1
20	QPSK	50	24	20.03	19.82	19.74	19.55		
20	QPSK	50	50	19.97	19.73	19.61	19.45		
20	QPSK	100	0	20.07	19.78	19.74	19.54	21	1
20	16QAM	1	0	20.13	19.83	19.86	19.60		
20	16QAM	1	49	20.06	19.77	19.72	19.48		
20	16QAM	1	99	20.14	19.87	19.80	19.61	20	2
20	16QAM	50	0	19.09	18.85	18.78	18.56		
20	16QAM	50	24	19.11	18.88	18.80	18.58		
20	16QAM	50	50	19.02	18.79	18.69	18.49	20	2
20	16QAM	100	0	19.13	18.83	18.79	18.57		
20	64QAM	1	0	19.93	18.58	18.47	18.27		
20	64QAM	1	49	19.83	18.49	18.43	18.20	20	2
20	64QAM	1	99	18.75	18.53	18.46	18.24		
20	64QAM	50	0	18.15	17.95	17.84	17.64		
20	64QAM	50	24	18.19	17.93	17.87	17.67	19	3
20	64QAM	50	50	18.08	17.85	17.81	17.58		
20	64QAM	100	0	18.13	17.97	17.86	17.67		
Channel				55315	55820	56160	56665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3557.5	3608	3642	3692.5		
15	QPSK	1	0	20.95	20.74	20.66	20.45	22	0
15	QPSK	1	37	20.91	20.65	20.57	20.37		
15	QPSK	1	74	20.88	20.72	20.59	20.41		
15	QPSK	36	0	20.04	19.80	19.74	19.55	21	1
15	QPSK	36	20	19.98	19.80	19.69	19.55		
15	QPSK	36	39	19.96	19.65	19.57	19.43		
15	QPSK	75	0	19.98	19.74	19.70	19.44	21	1
15	16QAM	1	0	20.04	19.78	19.81	19.55		
15	16QAM	1	37	20.00	19.74	19.68	19.45		
15	16QAM	1	74	20.13	19.79	19.70	19.57	20	2
15	16QAM	36	0	19.07	18.82	18.76	18.54		
15	16QAM	36	20	19.06	18.88	18.79	18.50		
15	16QAM	36	39	18.99	18.78	18.62	18.49	20	2
15	16QAM	75	0	19.06	18.78	18.76	18.47		
15	64QAM	1	0	19.88	18.58	18.43	18.19		
15	64QAM	1	37	19.83	18.43	18.33	18.20	20	2
15	64QAM	1	74	18.66	18.49	18.37	18.16		
15	64QAM	36	0	18.11	17.91	17.77	17.56		
15	64QAM	36	20	18.11	17.83	17.84	17.61	19	3
15	64QAM	36	39	18.01	17.82	17.76	17.54		
15	64QAM	75	0	18.06	17.89	17.86	17.63		
Channel				55290	55815	56165	56690	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3555	3607.5	3642.5	3695		
10	QPSK	1	0	21.00	20.72	20.66	20.47	22	0
10	QPSK	1	25	20.88	20.62	20.57	20.30		
10	QPSK	1	49	20.97	20.72	20.54	20.37		
10	QPSK	25	0	19.99	19.77	19.66	19.46	21	1
10	QPSK	25	12	20.03	19.80	19.64	19.52		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	19.94	19.70	19.55	19.44		
10	QPSK	50	0	19.98	19.71	19.65	19.45		
10	16QAM	1	0	20.07	19.75	19.81	19.52		
10	16QAM	1	25	20.03	19.73	19.63	19.38	21	1
10	16QAM	1	49	20.10	19.86	19.79	19.54		
10	16QAM	25	0	19.03	18.84	18.69	18.47		
10	16QAM	25	12	19.03	18.83	18.78	18.51	20	2
10	16QAM	25	25	18.92	18.75	18.66	18.49		
10	16QAM	50	0	19.08	18.73	18.72	18.48		
10	64QAM	1	0	19.88	18.54	18.38	18.18	20	2
10	64QAM	1	25	19.76	18.49	18.33	18.19		
10	64QAM	1	49	18.67	18.49	18.46	18.22		
10	64QAM	25	0	18.08	17.93	17.80	17.62	19	3
10	64QAM	25	12	18.14	17.93	17.79	17.58		
10	64QAM	25	25	18.01	17.84	17.77	17.48		
10	64QAM	50	0	18.08	17.91	17.83	17.59		
Channel				55265	55810	56170	56715	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3552.5	3607	3643	3697.5		
5	QPSK	1	0	20.97	20.72	20.65	20.50	22	0
5	QPSK	1	12	20.90	20.62	20.51	20.32		
5	QPSK	1	24	20.96	20.77	20.55	20.46		
5	QPSK	12	0	20.06	19.74	19.74	19.55	21	1
5	QPSK	12	7	19.98	19.76	19.70	19.45		
5	QPSK	12	13	19.88	19.70	19.57	19.45		
5	QPSK	25	0	20.00	19.68	19.72	19.47	21	1
5	16QAM	1	0	20.12	19.80	19.77	19.54		
5	16QAM	1	12	19.99	19.77	19.64	19.38		
5	16QAM	1	24	20.09	19.87	19.75	19.54	20	2
5	16QAM	12	0	19.02	18.77	18.70	18.50		
5	16QAM	12	7	19.02	18.81	18.70	18.55		
5	16QAM	12	13	19.01	18.77	18.64	18.40	20	2
5	16QAM	25	0	19.05	18.83	18.75	18.52		
5	64QAM	1	0	19.83	18.56	18.41	18.24		
5	64QAM	1	12	19.74	18.48	18.39	18.15	19	3
5	64QAM	1	24	18.66	18.51	18.42	18.18		
5	64QAM	12	0	18.13	17.94	17.77	17.64		
5	64QAM	12	7	18.14	17.84	17.83	17.62	19	3
5	64QAM	12	13	18.01	17.85	17.80	17.57		
5	64QAM	25	0	18.05	17.94	17.80	17.58		

Reduced Power Mode
<LTE Band 38 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150	13.5	0
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	13.30	13.31	13.26	13.5	0
20	QPSK	1	49	13.19	13.26	13.23		
20	QPSK	1	99	13.21	13.23	13.17		
20	QPSK	50	0	12.32	12.39	12.37	12.5	1
20	QPSK	50	24	12.36	12.37	12.37		
20	QPSK	50	50	12.35	12.34	12.30		
20	QPSK	100	0	12.37	12.35	12.28	12.5	1
20	16QAM	1	0	12.41	12.42	12.42		
20	16QAM	1	49	12.30	12.34	12.28		
20	16QAM	1	99	12.30	12.29	12.24	11.5	2
20	16QAM	50	0	11.37	11.42	11.40		
20	16QAM	50	24	11.39	11.36	11.42		
20	16QAM	50	50	11.36	11.40	11.33	11.5	2
20	16QAM	100	0	11.40	11.36	11.33		
20	64QAM	1	0	10.73	10.76	10.82		
20	64QAM	1	49	10.75	10.77	10.69	11.5	2
20	64QAM	1	99	10.71	10.72	10.61		
20	64QAM	50	0	10.36	10.43	10.40		
20	64QAM	50	24	10.39	10.39	10.42	10.5	3
20	64QAM	50	50	10.38	10.41	10.35		
20	64QAM	100	0	10.38	10.38	10.33		
Channel				37825	38000	38175	13.5	0
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	13.25	13.30	13.25	13.5	0
15	QPSK	1	37	13.17	13.28	13.23		
15	QPSK	1	74	13.14	13.22	13.17		
15	QPSK	36	0	12.22	12.39	12.32	12.5	1
15	QPSK	36	20	12.32	12.36	12.27		
15	QPSK	36	39	12.26	12.28	12.30		
15	QPSK	75	0	12.37	12.26	12.24	12.5	1
15	16QAM	1	0	12.33	12.36	12.36		
15	16QAM	1	37	12.29	12.33	12.19		
15	16QAM	1	74	12.21	12.26	12.14	11.5	2
15	16QAM	36	0	11.27	11.39	11.31		
15	16QAM	36	20	11.31	11.36	11.39		
15	16QAM	36	39	11.33	11.35	11.24	11.5	2
15	16QAM	75	0	11.30	11.28	11.25		
15	64QAM	1	0	10.66	10.73	10.75		
15	64QAM	1	37	10.65	10.72	10.67	10.5	3
15	64QAM	1	74	10.68	10.62	10.51		
15	64QAM	36	0	10.36	10.43	10.31		
15	64QAM	36	20	10.33	10.34	10.34	10.5	3
15	64QAM	36	39	10.36	10.37	10.29		
15	64QAM	75	0	10.35	10.30	10.33		
Channel				37800	38000	38200	13.5	0
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	13.22	13.30	13.21	13.5	0
10	QPSK	1	25	13.16	13.28	13.19		
10	QPSK	1	49	13.13	13.20	13.11		
10	QPSK	25	0	12.29	12.34	12.29	12.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	12	12.31	12.27	12.28		
10	QPSK	25	25	12.27	12.28	12.25		
10	QPSK	50	0	12.36	12.28	12.25		
10	16QAM	1	0	12.41	12.39	12.33	12.5	1
10	16QAM	1	25	12.24	12.34	12.18		
10	16QAM	1	49	12.21	12.24	12.16		
10	16QAM	25	0	11.36	11.41	11.32	11.5	2
10	16QAM	25	12	11.30	11.26	11.40		
10	16QAM	25	25	11.34	11.37	11.27		
10	16QAM	50	0	11.35	11.28	11.30	11.5	2
10	64QAM	1	0	10.72	10.66	10.73		
10	64QAM	1	25	10.65	10.77	10.66		
10	64QAM	1	49	10.67	10.71	10.53	10.5	3
10	64QAM	25	0	10.29	10.42	10.31		
10	64QAM	25	12	10.36	10.39	10.32		
10	64QAM	25	25	10.29	10.34	10.26	10.5	3
10	64QAM	50	0	10.31	10.33	10.26		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	13.30	13.26	13.30	13.5	0
5	QPSK	1	12	13.13	13.28	13.17		
5	QPSK	1	24	13.12	13.20	13.17		
5	QPSK	12	0	12.28	12.39	12.33	12.5	1
5	QPSK	12	7	12.35	12.37	12.36		
5	QPSK	12	13	12.33	12.33	12.28		
5	QPSK	25	0	12.29	12.27	12.28	12.5	1
5	16QAM	1	0	12.33	12.40	12.36		
5	16QAM	1	12	12.21	12.26	12.26		
5	16QAM	1	24	12.23	12.24	12.17	11.5	2
5	16QAM	12	0	11.32	11.33	11.33		
5	16QAM	12	7	11.30	11.35	11.38		
5	16QAM	12	13	11.34	11.31	11.30	11.5	2
5	16QAM	25	0	11.38	11.32	11.27		
5	64QAM	1	0	10.70	10.73	10.73		
5	64QAM	1	12	10.75	10.69	10.68	11.5	2
5	64QAM	1	24	10.63	10.72	10.60		
5	64QAM	12	0	10.36	10.42	10.37		
5	64QAM	12	7	10.30	10.32	10.35	10.5	3
5	64QAM	12	13	10.34	10.37	10.30		
5	64QAM	25	0	10.32	10.30	10.29		



<LTE Band 41 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	13.5	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	13.28	13.23	13.32	13.28	13.12	13.5	0
20	QPSK	1	49	13.22	13.16	13.21	13.11	13.03		
20	QPSK	1	99	13.21	13.18	13.24	13.15	13.11		
20	QPSK	50	0	12.33	12.30	12.37	12.36	12.26	12.5	1
20	QPSK	50	24	12.27	12.24	12.28	12.33	12.25		
20	QPSK	50	50	12.25	12.23	12.26	12.27	12.21		
20	QPSK	100	0	12.37	12.29	12.39	12.31	12.17	12.5	1
20	16QAM	1	0	12.35	12.36	12.41	12.38	12.24		
20	16QAM	1	49	12.30	12.26	12.29	12.18	12.10		
20	16QAM	1	99	12.31	12.22	12.36	12.20	12.19	11.5	2
20	16QAM	50	0	11.36	11.36	11.34	11.38	11.21		
20	16QAM	50	24	11.39	11.39	11.40	11.36	11.25		
20	16QAM	50	50	11.40	11.38	11.39	11.28	11.23	11.5	2
20	16QAM	100	0	11.37	11.34	11.40	11.32	11.16		
20	64QAM	1	0	10.80	10.76	10.87	10.79	10.73		
20	64QAM	1	49	10.79	10.77	10.78	10.97	10.82	11.5	2
20	64QAM	1	99	10.77	10.74	10.86	11.16	10.85		
20	64QAM	50	0	10.38	10.33	10.36	10.38	10.18		
20	64QAM	50	24	10.41	10.37	10.44	10.36	10.30	10.5	3
20	64QAM	50	50	10.39	10.35	10.37	10.27	10.22		
20	64QAM	100	0	10.39	10.35	10.39	10.32	10.17		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	13.24	13.19	13.29	13.21	13.10	13.5	0
15	QPSK	1	37	13.14	13.16	13.13	13.06	13.00		
15	QPSK	1	74	13.17	13.08	13.15	13.08	13.08		
15	QPSK	36	0	12.28	12.20	12.27	12.34	12.24	12.5	1
15	QPSK	36	20	12.26	12.15	12.25	12.33	12.24		
15	QPSK	36	39	12.16	12.17	12.16	12.24	12.21		
15	QPSK	75	0	12.37	12.26	12.34	12.23	12.14	12.5	1
15	16QAM	1	0	12.30	12.31	12.40	12.28	12.22		
15	16QAM	1	37	12.27	12.24	12.24	12.17	12.02		
15	16QAM	1	74	12.30	12.17	12.28	12.16	12.18	11.5	2
15	16QAM	36	0	11.34	11.26	11.32	11.38	11.16		
15	16QAM	36	20	11.34	11.38	11.38	11.30	11.17		
15	16QAM	36	39	11.38	11.34	11.38	11.26	11.17	11.5	2
15	16QAM	75	0	11.30	11.24	11.37	11.30	11.11		
15	64QAM	1	0	10.79	10.74	10.84	10.73	10.72		
15	64QAM	1	37	10.69	10.75	10.76	10.96	10.81	11.5	2
15	64QAM	1	74	10.74	10.73	10.80	11.12	10.76		
15	64QAM	36	0	10.35	10.31	10.35	10.33	10.09		
15	64QAM	36	20	10.35	10.32	10.38	10.31	10.25	10.5	3
15	64QAM	36	39	10.38	10.34	10.35	10.21	10.20		
15	64QAM	75	0	10.34	10.34	10.32	10.29	10.13		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	13.22	13.23	13.27	13.22	13.09	13.5	0
10	QPSK	1	25	13.16	13.16	13.18	13.04	12.97		
10	QPSK	1	49	13.18	13.10	13.17	13.10	13.09		
10	QPSK	25	0	12.23	12.20	12.34	12.27	12.20	12.5	1
10	QPSK	25	12	12.18	12.16	12.28	12.29	12.20		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	12.20	12.16	12.16	12.25	12.11		
10	QPSK	50	0	12.27	12.22	12.39	12.29	12.09		
10	16QAM	1	0	12.31	12.31	12.37	12.29	12.16		
10	16QAM	1	25	12.21	12.18	12.20	12.13	12.10	12.5	1
10	16QAM	1	49	12.24	12.21	12.27	12.17	12.16		
10	16QAM	25	0	11.28	11.34	11.33	11.35	11.16		
10	16QAM	25	12	11.33	11.39	11.31	11.26	11.15	11.5	2
10	16QAM	25	25	11.39	11.38	11.37	11.23	11.16		
10	16QAM	50	0	11.37	11.34	11.37	11.28	11.15		
10	64QAM	1	0	10.76	10.76	10.78	10.75	10.67	11.5	2
10	64QAM	1	25	10.79	10.70	10.75	10.87	10.78		
10	64QAM	1	49	10.73	10.71	10.82	11.12	10.79		
10	64QAM	25	0	10.28	10.31	10.29	10.31	10.18	10.5	3
10	64QAM	25	12	10.37	10.29	10.40	10.35	10.24		
10	64QAM	25	25	10.34	10.26	10.28	10.21	10.17		
10	64QAM	50	0	10.32	10.34	10.32	10.32	10.11		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	13.25	13.15	13.25	13.28	13.07	13.5	0
5	QPSK	1	12	13.20	13.16	13.19	13.03	12.93		
5	QPSK	1	24	13.21	13.13	13.19	13.09	13.02		
5	QPSK	12	0	12.29	12.23	12.31	12.31	12.22	12.5	1
5	QPSK	12	7	12.17	12.23	12.20	12.30	12.25		
5	QPSK	12	13	12.15	12.18	12.21	12.21	12.19		
5	QPSK	25	0	12.37	12.20	12.38	12.23	12.17	12.5	1
5	16QAM	1	0	12.30	12.27	12.38	12.34	12.22		
5	16QAM	1	12	12.27	12.17	12.28	12.13	12.00		
5	16QAM	1	24	12.22	12.13	12.34	12.17	12.12	11.5	2
5	16QAM	12	0	11.31	11.27	11.27	11.28	11.20		
5	16QAM	12	7	11.33	11.38	11.40	11.26	11.24		
5	16QAM	12	13	11.33	11.29	11.36	11.25	11.19	11.5	2
5	16QAM	25	0	11.29	11.34	11.33	11.32	11.11		
5	64QAM	1	0	10.80	10.71	10.81	10.74	10.64		
5	64QAM	1	12	10.77	10.76	10.68	10.93	10.78	11.5	2
5	64QAM	1	24	10.72	10.72	10.81	11.13	10.82		
5	64QAM	12	0	10.35	10.25	10.34	10.38	10.16		
5	64QAM	12	7	10.31	10.36	10.38	10.34	10.23	10.5	3
5	64QAM	12	13	10.31	10.35	10.30	10.24	10.15		
5	64QAM	25	0	10.36	10.26	10.33	10.30	10.07		

<LTE Band 41 HPUE>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490	16.5	0
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	16.05	15.99	16.12	16.11	16.07		
20	QPSK	1	49	16.01	15.95	16.01	15.92	15.89	16.5	0
20	QPSK	1	99	16.03	15.92	16.02	15.91	15.95		
20	QPSK	50	0	15.30	15.27	15.34	15.29	15.15		
20	QPSK	50	24	15.29	15.17	15.21	15.24	15.08	15.5	1
20	QPSK	50	50	15.26	15.25	15.23	15.15	15.09		
20	QPSK	100	0	15.32	15.26	15.35	15.23	15.13		
20	16QAM	1	0	15.50	15.41	15.44	15.50	15.30	15.5	1
20	16QAM	1	49	15.43	15.38	15.36	15.34	15.25		
20	16QAM	1	99	15.41	15.32	15.37	15.33	15.22		
20	16QAM	50	0	14.42	14.34	14.32	14.30	14.14	14.5	2
20	16QAM	50	24	14.36	14.33	14.33	14.24	14.15		
20	16QAM	50	50	14.36	14.29	14.32	14.20	14.13		
20	16QAM	100	0	14.36	14.29	14.35	14.23	14.15	14.5	2
20	64QAM	1	0	14.45	14.21	14.47	14.18	14.20		
20	64QAM	1	49	14.45	14.45	14.50	14.38	14.14		
20	64QAM	1	99	14.40	14.31	14.33	14.09	14.27	13.5	3
20	64QAM	50	0	13.45	13.26	13.17	13.36	13.01		
20	64QAM	50	24	13.38	13.20	13.30	13.25	13.05		
20	64QAM	50	50	13.48	13.27	13.41	13.40	13.24	13.5	3
20	64QAM	100	0	13.48	13.33	13.50	13.26	13.05		
Channel				39725	40173	40620	41068	41515	16.5	0
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	16.01	15.95	16.11	16.02	16.05		
15	QPSK	1	37	15.97	15.93	15.98	15.83	15.88	16.5	0
15	QPSK	1	74	16.00	15.89	15.94	15.86	15.93		
15	QPSK	36	0	15.23	15.23	15.24	15.21	15.13		
15	QPSK	36	20	15.25	15.09	15.15	15.24	15.02	15.5	1
15	QPSK	36	39	15.25	15.24	15.23	15.07	15.02		
15	QPSK	75	0	15.24	15.24	15.25	15.23	15.11		
15	16QAM	1	0	15.45	15.33	15.34	15.41	15.27	15.5	1
15	16QAM	1	37	15.33	15.37	15.35	15.24	15.16		
15	16QAM	1	74	15.37	15.22	15.37	15.27	15.20		
15	16QAM	36	0	14.33	14.26	14.26	14.25	14.13	14.5	2
15	16QAM	36	20	14.27	14.27	14.29	14.24	14.10		
15	16QAM	36	39	14.36	14.26	14.30	14.13	14.06		
15	16QAM	75	0	14.36	14.20	14.28	14.20	14.11	14.5	2
15	64QAM	1	0	14.39	14.16	14.43	14.17	14.17		
15	64QAM	1	37	14.41	14.36	14.49	14.28	14.08		
15	64QAM	1	74	14.37	14.25	14.27	14.00	14.27	13.5	3
15	64QAM	36	0	13.40	13.20	13.07	13.30	12.93		
15	64QAM	36	20	13.29	13.11	13.24	13.16	12.97		
15	64QAM	36	39	13.42	13.19	13.41	13.40	13.15	13.5	3
15	64QAM	75	0	13.40	13.32	13.43	13.18	12.99		
Channel				39700	40160	40620	41080	41540	16.5	0
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	16.02	15.94	16.04	16.10	15.99		
10	QPSK	1	25	15.94	15.86	15.92	15.87	15.87	16.5	0
10	QPSK	1	49	15.99	15.86	16.01	15.87	15.85		
10	QPSK	25	0	15.26	15.22	15.25	15.20	15.07		
10	QPSK	25	12	15.26	15.12	15.18	15.24	14.99	15.5	1



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	15.18	15.23	15.22	15.11	15.03		
10	QPSK	50	0	15.31	15.23	15.29	15.15	15.11		
10	16QAM	1	0	15.43	15.39	15.44	15.43	15.26		
10	16QAM	1	25	15.42	15.35	15.34	15.30	15.19	15.5	1
10	16QAM	1	49	15.32	15.32	15.33	15.26	15.16		
10	16QAM	25	0	14.38	14.25	14.24	14.26	14.12		
10	16QAM	25	12	14.30	14.27	14.33	14.14	14.05	14.5	2
10	16QAM	25	25	14.30	14.20	14.29	14.20	14.11		
10	16QAM	50	0	14.29	14.20	14.32	14.21	14.15		
10	64QAM	1	0	14.38	14.15	14.45	14.08	14.19	14.5	2
10	64QAM	1	25	14.36	14.37	14.41	14.30	14.05		
10	64QAM	1	49	14.33	14.21	14.28	14.06	14.26		
10	64QAM	25	0	13.43	13.19	13.12	13.27	12.92	13.5	3
10	64QAM	25	12	13.37	13.13	13.21	13.22	13.05		
10	64QAM	25	25	13.42	13.19	13.36	13.39	13.18		
10	64QAM	50	0	13.48	13.32	13.46	13.26	12.98		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	16.02	15.97	16.04	16.11	16.04	16.5	0
5	QPSK	1	12	15.97	15.89	15.93	15.86	15.80		
5	QPSK	1	24	16.00	15.87	15.99	15.91	15.86		
5	QPSK	12	0	15.30	15.19	15.25	15.28	15.05	15.5	1
5	QPSK	12	7	15.29	15.14	15.21	15.23	15.06		
5	QPSK	12	13	15.24	15.19	15.16	15.12	15.05		
5	QPSK	25	0	15.26	15.26	15.28	15.13	15.05	15.5	1
5	16QAM	1	0	15.49	15.32	15.39	15.45	15.28		
5	16QAM	1	12	15.42	15.29	15.33	15.27	15.22		
5	16QAM	1	24	15.31	15.25	15.33	15.28	15.21	14.5	2
5	16QAM	12	0	14.41	14.28	14.30	14.23	14.12		
5	16QAM	12	7	14.28	14.25	14.25	14.15	14.07		
5	16QAM	12	13	14.30	14.29	14.31	14.14	14.03	14.5	2
5	16QAM	25	0	14.36	14.25	14.29	14.20	14.15		
5	64QAM	1	0	14.37	14.20	14.39	14.13	14.12		
5	64QAM	1	12	14.35	14.40	14.45	14.31	14.14	14.5	2
5	64QAM	1	24	14.40	14.21	14.29	14.01	14.26		
5	64QAM	12	0	13.43	13.20	13.10	13.33	12.92		
5	64QAM	12	7	13.28	13.15	13.25	13.17	12.97	13.5	3
5	64QAM	12	13	13.44	13.23	13.37	13.36	13.21		
5	64QAM	25	0	13.46	13.31	13.47	13.24	13.03		

<LTE Band 48 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				55340	55830	56150	56640	13	0
Frequency (MHz)				3560	3609	3641	3690		
20	QPSK	1	0	12.64	12.65	12.40	12.38	13	0
20	QPSK	1	49	12.56	12.54	12.31	12.35		
20	QPSK	1	99	12.57	12.61	12.35	12.37		
20	QPSK	50	0	11.69	11.71	11.47	11.47	12	1
20	QPSK	50	24	11.65	11.70	11.45	11.39		
20	QPSK	50	50	11.68	11.59	11.35	11.44		
20	QPSK	100	0	11.64	11.70	11.45	11.50	12	1
20	16QAM	1	0	11.65	11.74	11.52	11.50		
20	16QAM	1	49	11.63	11.63	11.39	11.43		
20	16QAM	1	99	11.80	11.67	11.49	11.64	11	2
20	16QAM	50	0	10.72	10.76	10.50	10.53		
20	16QAM	50	24	10.74	10.76	10.54	10.53		
20	16QAM	50	50	10.72	10.63	10.40	10.48	11	2
20	16QAM	100	0	10.65	10.72	10.51	10.54		
20	64QAM	1	0	10.84	10.77	10.68	10.49		
20	64QAM	1	49	10.81	10.65	10.47	10.53	11	2
20	64QAM	1	99	10.68	10.44	10.45	10.36		
20	64QAM	50	0	9.63	9.76	9.54	9.72		
20	64QAM	50	24	9.58	9.71	9.41	9.37	10	3
20	64QAM	50	50	9.91	9.66	9.31	9.62		
20	64QAM	100	0	9.72	9.89	9.55	9.53		
Channel				55315	55820	56160	56665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3557.5	3608	3642	3692.5		
15	QPSK	1	0	12.61	12.58	12.37	12.28	13	0
15	QPSK	1	37	12.49	12.53	12.24	12.30		
15	QPSK	1	74	12.57	12.51	12.34	12.35		
15	QPSK	36	0	11.69	11.67	11.43	11.41	12	1
15	QPSK	36	20	11.63	11.63	11.37	11.29		
15	QPSK	36	39	11.64	11.54	11.29	11.43		
15	QPSK	75	0	11.61	11.66	11.37	11.49	12	1
15	16QAM	1	0	11.57	11.70	11.52	11.46		
15	16QAM	1	37	11.61	11.53	11.36	11.39		
15	16QAM	1	74	11.77	11.57	11.44	11.54	11	2
15	16QAM	36	0	10.62	10.69	10.45	10.45		
15	16QAM	36	20	10.72	10.71	10.50	10.50		
15	16QAM	36	39	10.71	10.61	10.40	10.44	11	2
15	16QAM	75	0	10.65	10.63	10.44	10.48		
15	64QAM	1	0	10.76	10.70	10.63	10.44		
15	64QAM	1	37	10.81	10.57	10.45	10.45	11	2
15	64QAM	1	74	10.63	10.42	10.36	10.31		
15	64QAM	36	0	9.54	9.68	9.50	9.67		
15	64QAM	36	20	9.57	9.68	9.34	9.33	10	3
15	64QAM	36	39	9.83	9.63	9.30	9.56		
15	64QAM	75	0	9.65	9.83	9.55	9.47		
Channel				55290	55815	56165	56690	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3555	3607.5	3642.5	3695		
10	QPSK	1	0	12.61	12.64	12.38	12.34	13	0
10	QPSK	1	25	12.48	12.54	12.24	12.30		
10	QPSK	1	49	12.57	12.52	12.28	12.35		
10	QPSK	25	0	11.60	11.62	11.42	11.41	12	1
10	QPSK	25	12	11.63	11.63	11.39	11.34		



FCC SAR TEST REPORT

Report No. : FA092423

10	QPSK	25	25	11.68	11.55	11.32	11.36		
10	QPSK	50	0	11.63	11.65	11.38	11.47		
10	16QAM	1	0	11.55	11.72	11.45	11.47		
10	16QAM	1	25	11.55	11.54	11.31	11.37	12	1
10	16QAM	1	49	11.79	11.67	11.44	11.62		
10	16QAM	25	0	10.68	10.72	10.47	10.46		
10	16QAM	25	12	10.72	10.72	10.48	10.52	11	2
10	16QAM	25	25	10.65	10.55	10.39	10.43		
10	16QAM	50	0	10.56	10.66	10.51	10.44		
10	64QAM	1	0	10.77	10.69	10.61	10.49	11	2
10	64QAM	1	25	10.76	10.63	10.47	10.46		
10	64QAM	1	49	10.66	10.44	10.38	10.35		
10	64QAM	25	0	9.57	9.75	9.49	9.65	10	3
10	64QAM	25	12	9.58	9.62	9.32	9.37		
10	64QAM	25	25	9.84	9.59	9.25	9.59		
10	64QAM	50	0	9.71	9.88	9.45	9.45		
Channel				55265	55810	56170	56715	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				3552.5	3607	3643	3697.5		
5	QPSK	1	0	12.58	12.61	12.32	12.37	13	0
5	QPSK	1	12	12.53	12.44	12.28	12.26		
5	QPSK	1	24	12.57	12.60	12.34	12.32		
5	QPSK	12	0	11.64	11.61	11.47	11.45	12	1
5	QPSK	12	7	11.56	11.63	11.37	11.39		
5	QPSK	12	13	11.65	11.58	11.34	11.37		
5	QPSK	25	0	11.57	11.64	11.44	11.41		
5	16QAM	1	0	11.56	11.74	11.52	11.50	12	1
5	16QAM	1	12	11.57	11.56	11.29	11.42		
5	16QAM	1	24	11.76	11.57	11.41	11.60		
5	16QAM	12	0	10.71	10.68	10.40	10.45	11	2
5	16QAM	12	7	10.69	10.75	10.47	10.44		
5	16QAM	12	13	10.65	10.53	10.35	10.48		
5	16QAM	25	0	10.59	10.67	10.47	10.45		
5	64QAM	1	0	10.77	10.67	10.62	10.40	11	2
5	64QAM	1	12	10.78	10.55	10.39	10.48		
5	64QAM	1	24	10.62	10.35	10.40	10.31		
5	64QAM	12	0	9.59	9.68	9.44	9.62	10	3
5	64QAM	12	7	9.48	9.62	9.31	9.33		
5	64QAM	12	13	9.87	9.58	9.21	9.62		
5	64QAM	25	0	9.62	9.82	9.45	9.50		

<LTE Carrier Aggregation combinations>
General Note:

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
3. All permutations exist. No restrictions on Pcell & SCell combinations. Only LTE Band 29A is limited to SCell.

2CC Downlink Carrier Aggregation			3CC Downlink Carrier Aggregation		
Number	Combination	Covered by	Number	Combination	Covered by
		Measurement Superset			Measurement Superset
1	12A-12A	3CC-87	69	12A-30A-66A	4CC-191
2	12A-25A		70	12A-66A-66A	4CC-192
3	12A-30A	3CC-69	71	12A-66C	4CC-210
4	12A-66A	3CC-70	72	12B-66A	4CC-192
5	12B	3CC-72	73	13A-48A-48A	4CC-194
6	13A-48A	3CC-73	74	13A-48A-66A	4CC-196
7	13A-66A	3CC-76	75	13A-48C	4CC-197
8	14A-30A	3CC-79	76	13A-66A-66A	4CC-199
9	14A-66A	3CC-80	77	13A-66B	4CC-195
10	25A-25A	3CC-81	78	13A-66C	4CC-196
11	25A-26A	3CC-82	79	14A-30A-66A	4CC-203
12	25A-41A	3CC-83	80	14A-66A-66A	4CC-204
13	26A-41A	3CC-86	81	25A-25A-25A	
14	2A-12A	3CC-87	82	25A-25A-26A	
15	2A-13A	3CC-91	83	25A-25A-41A	
16	2A-14A	3CC-93	84	25A-26A-41A	
17	2A-2A	3CC-95	85	25A-41C	4CC-205
18	2A-30A	3CC-98	86	26A-41C	4CC-206
19	2A-48A	3CC-105	87	2A-12A-12A	4CC-219
20	2A-4A	3CC-108	88	2A-12A-30A	4CC-220
21	2A-5A	3CC-115	89	2A-12A-66A	4CC-210
22	2A-66A	3CC-120	90	2A-12B	4CC-222
23	2A-71A	3CC-102	91	2A-13A-48A	4CC-211
24	2A-7A	3CC-126	92	2A-13A-66A	4CC-214
25	2C	3CC-128	93	2A-14A-30A	4CC-217
26	30A-66A	3CC-132	94	2A-14A-66A	4CC-218
27	38A-40A	3CC-133	95	2A-2A-12A	4CC-219
28	38C		96	2A-2A-13A	4CC-223
29	41A-41A	3CC-134	97	2A-2A-14A	4CC-224
30	41A-42A	3CC-137	98	2A-2A-30A	4CC-226
31	41A-48A		99	2A-2A-4A	4CC-228
32	41C	5CC-380	100	2A-2A-5A	4CC-231
33	42A-42A	3CC-136	101	2A-2A-66A	4CC-234
34	42C	5CC-379	102	2A-2A-71A	4CC-235
35	48A-48A	3CC-142	103	2A-2A-7A	4CC-238
36	48A-66A	3CC-142	104	2A-30A-66A	4CC-226
37	48A-71A	3CC-149	105	2A-48A-48A	4CC-240
38	48C	3CC-107	106	2A-48A-66A	4CC-240
39	4A-12A	3CC-108	107	2A-48C	4CC-242
40	4A-13A	3CC-109	108	2A-4A-12A	4CC-244
41	4A-30A	3CC-110	109	2A-4A-13A	
42	4A-48A		110	2A-4A-30A	4CC-249
43	4A-4A	3CC-111	111	2A-4A-4A	4CC-247
44	4A-5A	3CC-112	112	2A-4A-5A	4CC-249
45	4A-71A	3CC-113	113	2A-4A-71A	4CC-230

46	4A-7A	3CC-114	114	2A-4A-7A	4CC-251
47	5A-25A		115	2A-5A-30A	4CC-254
48	5A-30A	3CC-115	116	2A-5A-48A	4CC-255
49	5A-38A		117	2A-5A-66A	4CC-256
50	5A-40A	3CC-166	118	2A-5A-7A	
51	5A-41A		119	2A-5B	4CC-233
52	5A-48A	3CC-116	120	2A-66A-66A	4CC-234
53	5A-5A	3CC-169	121	2A-66A-71A	4CC-235
54	5A-66A	3CC-170	122	2A-66B	4CC-236
55	5A-7A	3CC-173	123	2A-66C	4CC-237
56	5B	3CC-119	124	2A-7A-12A	4CC-251
57	66A-66A	3CC-132	125	2A-7A-66A	4CC-238
58	66A-71A	3CC-121	126	2A-7A-7A	4CC-252
59	66B	3CC-145	127	2A-7C	4CC-253
60	66C	3CC-146	128	2C-12A	4CC-272
61	7A-12A	3CC-124	129	2C-30A	4CC-261
62	7A-42A		130	2C-5A	4CC-273
63	7A-66A	3CC-125	131	2C-66A	4CC-274
64	7A-7A	3CC-126	132	30A-66A-66A	4CC-239
65	7B		133	41A-41A-41A	4CC-275
66	7C	3CC-127	134	41A-41C	4CC-275
67	4A-17A		135	41A-42A-42A	4CC-277
68	2A-17A		136	41A-42C	4CC-277
			137	41C-42A	4CC-280
			138	41D	4CC-276
			139	42A-42C	4CC-277
			140	42D	4CC-278
			141	48A-48A-66A	4CC-286
			142	48A-48A-71A	
			143	48A-48C	4CC-289
			144	48A-66A-66A	4CC-286
			145	48A-66B	4CC-287
			146	48A-66C	4CC-288
			147	48C-66A	4CC-289
			148	48C-71A	
			149	48D	4CC-290
			150	4A-12A-12A	4CC-299
			151	4A-12A-30A	4CC-300
			152	4A-12B	4CC-301
			153	4A-48C	
			154	4A-4A-12A	4CC-299
			155	4A-4A-13A	
			156	4A-4A-30A	4CC-300
			157	4A-4A-5A	4CC-303
			158	4A-4A-71A	
			159	4A-4A-7A	
			160	4A-5A-30A	4CC-302
			161	4A-5B	4CC-303
			162	4A-7A-12A	4CC-251
			163	4A-7A-7A	4CC-252
			164	4A-7C	4CC-253
			165	5A-30A-66A	4CC-305
			166	5A-48A-48A	4CC-306
			167	5A-48A-66A	4CC-306
			168	5A-48C	4CC-308
			169	5A-5A-66A	4CC-310



			170	5A-66A-66A	4CC-310
			171	5A-66B	4CC-311
			172	5A-66C	4CC-312
			173	5A-7A-7A	
			174	5A-7C	
			175	5B-30A	4CC-316
			176	5B-66A	4CC-317
			177	66A-66A-66A	4CC-263
			178	66A-66A-71A	4CC-264
			179	66A-66B	4CC-313
			180	66A-66C	4CC-314
			181	66C-71A	4CC-267
			182	66D	4CC-268
			183	7A-12A-66A	4CC-269
			184	7A-12B	4CC-320
			185	7A-66A-66A	4CC-326
			186	7C-66A	4CC-321
			187	2A-48A-66A	4CC-325
			188	48A-66B	4CC-195
			189	7A-7A-66A	4CC-326
			190	7A-7A-13A	4CC-328

4CC Downlink Carrier Aggregation			5CC Downlink Carrier Aggregation		
Number	Combination	Covered by	Covered by	Combination	Covered by
		Measurement Superset	Measurement Superset		Measurement Superset
191	12A-30A-66A-66A	5CC-338	329	13A-48A-48C-66A	
192	12B-66A-66A	5CC-402	330	13A-48A-48D	
193	13A-48A-48A-66A	5CC-339	331	13A-48C-48C	
194	13A-48A-48C	5CC-329	332	13A-48C-66B	
195	13A-48A-66B		333	13A-48C-66C	
196	13A-48A-66C		334	13A-48D-66A	
197	13A-48C-66A	5CC-341	335	13A-48E	5CC-407
198	13A-48D	5CC-334	336	25A-25A-41D	
199	13A-66A-66A-66A		337	25A-41E	
200	13A-66A-66B	5CC-343	338	2A-12A-30A-66A-66A	
201	13A-66A-66C	5CC-344	339	2A-13A-48A-48A-66A	
202	13A-66D	5CC-345	340	2A-13A-48A-48C	
203	14A-30A-66A-66A	5CC-346	341	2A-13A-48C-66A	
204	14A-66A-66A-66A	5CC-347	342	2A-13A-48D	
205	25A-25A-41C		343	2A-13A-66A-66B	
206	25A-26A-41C		344	2A-13A-66A-66C	
207	25A-41D	5CC-336	345	2A-13A-66D	
208	2A-12A-30A-66A	5CC-338	346	2A-14A-30A-66A-66A	
209	2A-12A-66A-66A	5CC-349	347	2A-14A-66A-66A-66A	
210	2A-12A-66C		348	2A-2A-12A-30A-66A	
211	2A-13A-48A-48A	5CC-339	349	2A-2A-12A-66A-66A	
212	2A-13A-48A-66A	5CC-339	350	2A-2A-12B-66A	
213	2A-13A-48C	5CC-341	351	2A-2A-13A-66A-66A	
214	2A-13A-66A-66A	5CC-351	352	2A-2A-13A-66B	
215	2A-13A-66B	5CC-352	353	2A-2A-14A-30A-66A	
216	2A-13A-66C	5CC-344	354	2A-2A-14A-66A-66A	
217	2A-14A-30A-66A	5CC-346	355	2A-2A-5A-30A-66A	
218	2A-14A-66A-66A	5CC-347	356	2A-2A-5A-66A-66A	
219	2A-2A-12A-12A		357	2A-2A-5A-66B	
220	2A-2A-12A-30A	5CC-348	358	2A-2A-5A-66C	
221	2A-2A-12A-66A	5CC-349	359	2A-2A-5B-66A	
222	2A-2A-12B	5CC-350	360	2A-2A-66A-66B	
223	2A-2A-13A-66A	5CC-351	361	2A-2A-66A-66C	
224	2A-2A-14A-30A	5CC-353	362	2A-2A-7A-12A-66A	
225	2A-2A-14A-66A	5CC-354	363	2A-48A-48C-66A	
226	2A-2A-30A-66A	5CC-355	364	2A-48A-48D	
227	2A-2A-4A-12A		365	2A-48C-48C	
228	2A-2A-4A-4A		366	2A-48D-66A	
229	2A-2A-4A-5A		367	2A-48E	5CC-405
230	2A-2A-4A-71A		368	2A-4A-5B-30A	
231	2A-2A-5A-30A	5CC-355	369	2A-5A-30A-66A-66A	
232	2A-2A-5A-66A	5CC-356	370	2A-5A-48A-48A-66A	
233	2A-2A-5B	5CC-359	371	2A-5A-48A-48C	
234	2A-2A-66A-66A		372	2A-5A-48C-66A	
235	2A-2A-66A-71A		373	2A-5A-48D	
236	2A-2A-66B	5CC-360	374	2A-5B-30A-66A	
237	2A-2A-66C	5CC-361	375	2A-5B-66A-66A	
238	2A-2A-7A-66A	5CC-362	376	2A-5B-66B	
239	2A-30A-66A-66A	5CC-338	377	2A-5B-66C	
240	2A-48A-48A-66A	5CC-370	378	2A-7A-12B-66A	
241	2A-48A-48C	5CC-363	379	2C-5B-30A	
242	2A-48C-66A	5CC-363	380	41A-42C-42C	

243	2A-48D	5CC-366	381	41C-41D	
244	2A-4A-12A-12A		382	41C-42A-42C	
245	2A-4A-12A-30A		383	41D-42C	
246	2A-4A-12B		384	48A-48C-66B	
247	2A-4A-4A-12A		385	48A-48C-66C	
248	2A-4A-4A-5A		386	48A-48D-66A	
249	2A-4A-5A-30A		387	48C-48C-66A	
250	2A-4A-5B	5CC-368	388	48C-48D	
251	2A-4A-7A-12A		389	48C-66A-66A-66A	
252	2A-4A-7A-7A		390	48E-66A	
253	2A-4A-7C		391	48F	
254	2A-5A-30A-66A	5CC-369	392	4A-48E	
255	2A-5A-48A-48A	5CC-370	393	4A-4A-5B-30A	
256	2A-5A-48A-66A	5CC-370	394	5A-48A-48C-66A	
257	2A-5A-48C	5CC-372	395	5A-48C-48C	
258	2A-5A-66A-66A	5CC-356	396	5A-48E	
259	2A-5A-66B	5CC-357	397	5B-30A-66A-66A	
260	2A-5A-66C	5CC-358	398	5B-66A-66B	
261	2A-5B-30A	5CC-374	399	5B-66A-66C	
262	2A-5B-66A	5CC-375	400	5A-48A-48D	
263	2A-66A-66A-66A	5CC-347	401	5A-48D-66A	
264	2A-66A-66A-71A		402	2A-12B-66A-66A	
265	2A-66A-66B	5CC-360	403	2A-7C-66A-66A	
266	2A-66A-66C	5CC-361	404	2A-7A-7A-66A-66A	
267	2A-66C-71A				
268	2A-66D	5CC-345			
269	2A-7A-12A-66A	5CC-362	6CC Downlink Carrier Aggregation		
270	2A-7A-12B	5CC-378	Number	Combination	Covered by
271	2A-7A-66A-66A	5CC-404	405	2A-48E-66A	
272	2C-12A-30A		406	41C-42C-42C	
273	2C-5A-30A		407	13A-48E-66A	
274	2C-66A-66A				
275	41A-41A-41C				
276	41A-41D				
277	41A-42A-42C				
278	41A-42D				
279	41C-41C				
280	41C-42C	5CC-382			
281	41D-42A				
282	41E	5CC-337			
283	42A-42D				
284	42C-42C	5CC-380			
285	42E				
286	48A-48A-66A-66A				
287	48A-48A-66B				
288	48A-48A-66C				
289	48A-48C-66A	5CC-394			
290	48A-48D	5CC-400			
291	48A-66A-66A-66A				
292	48C-48C	5CC-395			
293	48C-66A-66A				
294	48C-66B	5CC-384			
295	48C-66C	5CC-385			
296	48D-66A	5CC-401			
297	48E	5CC-396			
298	4A-48D				

299	4A-4A-12A-12A				
300	4A-4A-12A-30A				
301	4A-4A-12B				
302	4A-4A-5A-30A				
303	4A-4A-5B	5CC-393			
304	4A-5B-30A	5CC-393			
305	5A-30A-66A-66A	5CC-369			
306	5A-48A-48A-66A	5CC-370			
307	5A-48A-48C	5CC-371			
308	5A-48C-66A	5CC-372			
309	5A-48D	5CC-373			
310	5A-5A-66A-66A				
311	5A-5A-66B				
312	5A-5A-66C				
313	5A-66A-66B				
314	5A-66A-66C				
315	5A-66D				
316	5B-30A-66A	5CC-397			
317	5B-66A-66A	5CC-397			
318	5B-66B	5CC-376			
319	5B-66C	5CC-377			
320	7A-12B-66A	5CC-378			
321	7C-66A-66A	5CC-403			
322	2A-12B-66A	5CC-350			
323	2A-7A-7A-66A	5CC-404			
324	2A-7C-66A	5CC-403			
325	2A-48A-66A-66A				
326	7A-7A-66A-66A	5CC-404			
327	2A-2A-7A-12A	5CC-362			
328	2A-7A-7A-13A				

<Power verification when LTE Carrier Aggregation Active>
General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Two Carrier power verification>

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		2	20	1860	18700	QPSK	1	0	17	10	740	5790	23.19	23.20
		4	20	1720	20050	QPSK	1	0	17	10	740	5790	23.26	23.33
		4	20	1720	20050	QPSK	1	0	48	20	3609	55830	23.29	23.35
		5	10	829	20450	QPSK	1	0	25	20	1960	8340	23.83	23.85
		5	10	829	20450	QPSK	1	0	38	20	2595	38000	23.76	23.76
		5	10	829	20450	QPSK	1	0	41	20	2593	40620	23.67	23.76
		7	20	2560	21350	QPSK	1	99	42	20	3575	43340	22.15	22.22
		12	10	704	23060	QPSK	1	0	25	20	1960	8340	23.65	23.72
		41	20	2593	40620	QPSK	1	99	48	20	3609	55830	23.76	23.86
Intra-Band	Contiguous	7	15	2562.5	21375	QPSK	1	74	7	5	2691.80	3468	22.21	22.21
		38	20	2595	38000	QPSK	1	99	38	20	2614.80	38198	23.78	23.82

<Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	23.05	23.13
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	7	20	2655	3100	23.10	23.11
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	7	20	2655	3100	23.28	23.34
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	13	10	751	5230	23.35	23.36
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	71	20	637	68786	23.25	23.30
	4	20	1720	20050	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	23.30	23.40
	5	10	829	20450	QPSK	1	0	7	20	2655	3100	7	5	2622.5	2775	23.81	23.81
	5	10	829	20450	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	23.67	23.76
	25	20	1880	26340	QPSK	1	0	25	5	1932.5	8065	25	20	1960	8340	23.18	23.22
	25	20	1880	26340	QPSK	1	0	25	5	1932.5	8065	26	15	876.5	8865	23.11	23.21
	25	20	1880	26340	QPSK	1	0	25	5	1932.5	8065	41	20	2593	40620	23.16	23.26
	25	20	1880	26340	QPSK	1	0	26	15	876.5	8865	41	20	2593	40620	23.22	23.24
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	71	20	637	68786	21.81	21.82
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	71	20	637	68786	21.86	21.91

<Four Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	12	10	737.5	5095	23.03	23.10
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	4	5	2112.5	1975	23.16	23.18
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	5	10	881.5	2525	23.04	23.12
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	4	20	2132.5	2175	71	20	637	68786	23.08	23.12
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	5	737.5	5095	12	5	731.5	5035	23.14	23.14
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2112.5	66461	23.17	23.17
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	71	20	637	68786	23.14	23.18
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	4	5	2112.5	1975	5	10	881.5	2525	23.17	23.17
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	4	5	2112.5	1975	12	10	737.5	5095	23.04	23.14
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	30	10	9820	2355	23.11	23.20
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	5	2622.5	2775	23.09	23.18
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	12	10	737.5	5095	23.10	23.19
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	7	20	2674.8	3298	23.16	23.17
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	5	737.5	5095	12	5	731.5	5035	23.16	23.19
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	30	10	9820	2355	23.08	23.15
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	12	5	737.5	5095	12	10	744.7	5167	23.14	23.19
	2	20	1860	18700	QPSK	1	0	12	10	737.5	5095	66	20	2155	66886	66	20	2174.8	67084	23.13	23.19
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	5	2622.5	2775	13	10	751	5230	23.09	23.15
	2	20	1860	18700	QPSK	1	0	48	20	3697.5	56715	66	20	2155	66886	66	5	2112.5	66461	23.12	23.16
	2	20	1860	18700	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	71	20	637	68786	23.13	23.19
	2	20	1860	18700	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	71	20	637	68786	23.08	23.18
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	5	10	881.5	2525	30	10	9820	2355	23.12	23.19
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	12	10	737.5	5095	30	10	9820	2355	23.11	23.18
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	66	20	2155	66886	66	5	2112.5	66461	23.00	23.10
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	5	10	881.5	2525	30	10	9820	2355	23.22	23.30
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	12	5	737.5	5095	12	5	731.5	5035	23.27	23.34
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	12	10	737.5	5095	30	10	9820	2355	23.29	23.35
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	12	5	737.5	5095	12	10	744.7	5167	23.27	23.31
	4	20	1720	20050	QPSK	1	0	48	20	3697.5	56715	48	20	3717.3	56913	48	20	3737.1	57111	23.31	23.34
	5	10	829	20450	QPSK	1	0	5	5	891.5	2625	66	20	2155	66886	66	5	2112.5	66461	23.69	23.78
	5	10	829	20450	QPSK	1	0	5	5	891.5	2625	66	15	2155	66886	66	5	2164.3	66979	23.75	23.78
	5	10	829	20450	QPSK	1	0	5	5	891.5	2625	66	20	2155	66886	66	20	2174.8	67084	23.71	23.78
	5	10	829	20450	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	66	15	2121.8	66554	23.74	23.79

	5	10	829	20450	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	66	20	2124.2	66578	23.76	23.81
	5	10	829	20450	QPSK	1	0	66	20	2155	66886	66	20	2174.8	67084	66	20	2194.6	67282	23.74	23.84
	13	10	782	23230	QPSK	1	0	48	20	3697.5	56715	66	15	2155	66886	66	5	2164.3	66979	23.76	23.79
	13	10	782	23230	QPSK	1	0	48	20	3697.5	56715	66	20	2155	66886	66	20	2174.8	67084	23.67	23.70
	13	10	782	23230	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	66	20	2190	67236	23.72	23.79
	25	20	1880	26340	QPSK	1	0	25	5	1932.5	8065	41	20	2593	40620	41	20	2612.8	40818	23.22	23.30
	25	20	1880	26340	QPSK	1	0	26	15	1960	8340	41	20	2593	40620	41	20	2612.8	40818	23.17	23.23
	41	20	2593	40620	QPSK	1	99	41	5	2687.5	41565	41	20	2506	39750	41	20	2525.8	39948	23.80	23.80
	41	20	2593	40620	QPSK	1	99	41	5	2687.5	41565	41	20	2699.2	41682	41	20	2719	41880	23.76	23.81
	41	20	2593	40620	QPSK	1	99	42	20	3575	43340	42	5	3552.5	43115	42	20	3564.2	43232	23.78	23.83
	41	20	2593	40620	QPSK	1	99	42	20	3575	43340	42	20	3594.8	43538	42	20	3614.6	43736	23.74	23.83
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	41	5	2687.5	41565	41	20	2699.2	41682	23.70	23.80
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	41	20	2632.6	41016	42	20	3575	43340	23.73	23.76
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	66	20	2155	66886	66	5	2112.5	66461	21.81	21.83
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	66	15	2155	66886	66	5	2164.3	66979	21.88	21.88
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	66	20	2155	66886	66	20	2174.8	67084	21.84	21.91
	48	20	3641	56150	QPSK	1	0	66	20	2155	66886	66	5	2112.5	66461	66	20	2190	67236	21.86	21.88
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	66	20	2155	66886	66	5	2112.5	66461	21.75	21.83

<Five Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	30	10	2355	9820	66	20	2155	66886	23.10	23.14
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	10	737.5	5095	66	20	2155	66886	66	5	2112.5	66461	23.10	23.13
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	23.14	23.17
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	13	10	751	5230	66	20	2155	66886	66	5	2112.5	66461	23.06	23.10
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	13	10	751	5230	66	15	2155	66886	66	5	2164.3	66979	23.05	23.12
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	14	10	763	5330	30	10	2355	9820	66	20	2155	66886	23.06	23.13
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	14	10	763	5330	66	20	2155	66886	66	5	2112.5	66461	23.07	23.16
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	30	10	2355	9820	66	20	2155	66886	23.17	23.19
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	5	2112.5	66461	23.12	23.13
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	15	2155	66886	66	5	2164.3	66979	23.11	23.14
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	66	20	2155	66886	66	20	2174.8	67084	23.08	23.18
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	23.11	23.19
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2112.5	66461	66	15	2121.8	66554	23.10	23.11
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	66	20	2155	66886	66	5	2112.5	66461	66	20	2124.2	66578	23.10	23.14
	2	20	1860	18700	QPSK	1	0	2	5	1987.5	1175	7	20	2655	3100	12	10	737.5	5095	66	20	2155	66886	23.14	23.14
	2	20	1860	18700	QPSK	1	0	2	20	1959.8	898	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.12	23.18
	2	20	1860	18700	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.07	23.11
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	66	20	2155	66886	66	5	2112.5	66461	23.10	23.15
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	5	3697.5	56715	66	20	2155	66886	23.10	23.14
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	23.04	23.10
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	23.08	23.15
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	23.11	23.18
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	66	20	2155	66886	23.10	23.15
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	5	2112.5	66461	23.09	23.14
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	15	2155	66886	66	5	2164.3	66979	23.11	23.14
	2	20	1860	18700	QPSK	1	0	5	10	881.5	2525	5	10	891.4	2624	66	20	2155	66886	66	20	2174.8	67084	23.09	23.10
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	23.18	23.19
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	20	2674.8	3298	66	20	2155	66886	66	5	2112.5	66461	23.06	23.12
	2	20	1860	18700	QPSK	1	0	7	20	2655	3100	7	5	2622.5	2775	66	20	2155	66886	66	5	2112.5	66461	23.16	23.18
	2	20	1860	18700	QPSK	1	0	12	5	737.5	5095	12	10	744.7	5167	66	20	2155	66886	66	5	2112.5	66461	23.13	23.14
	2	20	1860	18700	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	66	20	2155	66886	66	5	2112.5	66461	23.13	23.13
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	5	3697.5	56715	66	20	2155	66886	23.09	23.12
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	23.05	23.14



FCC SAR TEST REPORT

Report No. : FA092423

	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	23.08	23.14
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	23.04	23.14
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	5	2112.5	66461	66	15	2121.8	66554	23.06	23.13
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	5	2112.5	66461	66	20	2124.2	66578	23.12	23.12
	2	20	1860	18700	QPSK	1	0	13	10	751	5230	66	20	2155	66886	66	20	2174.8	67084	66	20	2194.6	67282	23.05	23.10
	2	20	1860	18700	QPSK	1	0	14	10	763	5330	30	10	2355	9820	66	20	2155	66886	66	5	2112.5	66461	23.08	23.12
	2	20	1860	18700	QPSK	1	0	14	10	763	5330	66	20	2155	66886	66	5	2112.5	66461	66	20	2190	67236	23.13	23.16
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	23.10	23.14
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	23.13	23.18
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	23.12	23.20
	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	23.12	23.18
	4	20	1720	20050	QPSK	1	0	4	5	2152.5	2375	5	10	881.5	2525	5	10	891.4	2624	30	10	2355	9820	23.33	23.36
	4	20	1720	20050	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	23.25	23.32
	5	10	829	20450	QPSK	1	0	5	10	883.9	2549	66	20	2155	66886	66	5	2112.5	66461	66	15	2121.8	66554	23.74	23.75
	5	10	829	20450	QPSK	1	0	5	10	883.9	2549	66	20	2155	66886	66	5	2112.5	66461	66	20	2124.2	66578	23.76	23.83
	5	10	829	20450	QPSK	1	0	5	10	883.9	2549	30	10	2355	9820	66	20	2155	66886	66	5	2112.5	66461	23.77	23.81
	5	10	829	20450	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	23.77	23.77
	5	10	829	20450	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	23.77	23.84
	5	10	829	20450	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3668.4	56424	23.74	23.75
	5	10	829	20450	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	23.71	23.75
	5	10	829	20450	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	23.69	23.79
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	66	20	2155	66886	23.64	23.69
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	5	3697.5	56715	48	20	3709.2	56832	48	20	3729	57030	23.67	23.71
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	5	3697.5	56715	48	20	3709.2	56832	23.65	23.71
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	66	15	2155	66886	66	5	2164.3	66979	23.68	23.76
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	66	20	2155	66886	66	20	2174.8	67084	23.71	23.78
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	66	20	2155	66886	23.67	23.77
	25	20	1880	26340	QPSK	1	0	25	5	1932.5	8065	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	23.20	23.26
	25	20	1880	26340	QPSK	1	0	41	20	2593	40620	41	20	2612.8	40818	41	20	2632.6	41016	41	20	2652.4	41214	23.24	23.31
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	41	5	2687.5	41565	41	20	2667.7	41367	41	20	2647.9	41169	23.76	23.78
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	42	20	3575	43340	42	5	3552.5	43115	42	20	3564.2	43232	23.73	23.78
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	41	20	2632.6	41016	42	20	3575	43340	42	20	3594.8	43538	23.75	23.79
	41	20	2593	40620	QPSK	1	99	42	20	3575	43340	42	20	3594.8	43538	42	5	3552.5	43115	42	20	3564.2	43232	23.80	23.86
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	48	20	3564.2	55382	66	15	2155	66886	66	5	2164.3	66979	21.80	21.83
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	48	20	3564.2	55382	66	20	2155	66886	66	20	2174.8	67084	21.82	21.82
	48	20	3641	56150	QPSK	1	0	48	5	3552.5	55265	48	20	3564.2	55382	48	20	3584	55580	66	20	2155	66886	21.85	21.87
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	48	5	3552.5	55265	48	20	3564.2	55382	66	20	2155	66886	21.80	21.86
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	48	5	3552.5	55265	48	20	3564.2	55382	48	20	3584	55580	21.79	21.82
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	66	20	2155	66886	66	5	2112.5	66461	66	20	2190	67236	21.84	21.89
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	48	20	3601.4	55754	48	20	3581.6	55556	66	20	2155	66886	21.79	21.88
	48	20	3641	56150	QPSK	1	0	48	20	3621.2	55952	48	20	3601.4	55754	48	20	3581.6	55556	48	20	3561.8	55358	21.85	21.86

<Six Carrier power verification>

Configure	PCC							SCC1				SCC2				SCC3				SCC4				SCC5				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1860	18700	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3648.6	56226	66	20	2155	66886	23.19	23.20
	13	10	782	23230	QPSK	1	0	48	20	3609	55830	48	20	3628.8	56028	48	20	3648.6	56226	48	20	3648.6	56226	66	20	2155	66886	23.76	23.79
	41	20	2593	40620	QPSK	1	99	41	20	2612.8	40818	42	20	3575	43340	42	20	3594.8	43538	42	5	3552.5	43115	42	20	3564.2	43232	23.76	23.77

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	5B
2	7C
3	66B
4	66C
5	38C
6	41C
7	48C

<Intra-band>
General Note:

- The device supports intra-band uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

CA_5B										
Combination 10MHz+10MHz (50RB+50RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20450	20549	QPSK	1	0	0	0	1	0	19.81	20.5
20525	20426	QPSK	1	0	1	49	2	0	19.83	20.5
20600	20501	QPSK	1	0	1	49	2	0	19.67	20.5

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	14.41	14.5
21100	20902	QPSK	1	0	1	99	2	0	14.38	14.5
21350	21152	QPSK	1	0	1	99	2	0	14.39	14.5

CA_66B										
Combination 15MHz+5MHz (75RB+25RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132047	132140	QPSK	1	0	0	0	1	0	16.85	17
132322	132229	QPSK	1	0	1	24	2	0	16.83	17
132572	132479	QPSK	1	0	1	24	2	0	16.79	17

CA_66C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
132072	132270	QPSK	1	0	0	0	1	0	16.92	17
132322	132124	QPSK	1	0	1	99	2	0	16.89	17
132572	132374	QPSK	1	0	1	99	2	0	16.83	17

CA_38C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	0	0	0	1	0	13.44	13.5
37901	38099	QPSK	1	0	0	0	1	0	13.41	13.5
38150	37952	QPSK	1	0	1	99	2	0	13.38	13.5

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	13.46	13.5
40185	39987	QPSK	1	0	1	99	2	0	13.41	13.5
40620	40422	QPSK	1	0	1	99	2	0	13.33	13.5
41055	40857	QPSK	1	0	1	99	2	0	13.32	13.5
41490	41292	QPSK	1	0	1	99	2	0	13.24	13.5

CA_48C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune-up power (dBm)
			RB Size	RB offset	RB Size	RB offset				
55340	55538	QPSK	1	0	0	0	1	0	12.96	13
55830	55632	QPSK	1	0	1	99	2	0	12.84	13
56150	55952	QPSK	1	0	1	99	2	0	12.78	13
56640	56442	QPSK	1	0	1	99	2	0	12.77	13

13. 5G NR Output Power (Unit: dBm)

General Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM measurement is unnecessary.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, full measurement on Pi/2 BPSK and QPSK, for 16QAM/64QAM/256QAM spot check 1RB 1offset configuration to ensure the output power will not ½ dB higher than Pi/2 BPSK and QPSK, for smaller bandwidth output power will spot check 1RB 1offset configuration at Pi/2 BPSK to ensure output power will not ½ dB higher than largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - d. 50% RB allocation for Pi/2 BPSK SAR testing follows 1RB Pi/2 BPSK allocation procedure
 - e. Pi/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - f. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
2. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% transmission.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 ¹	≤ 1.2 ¹	≤ 0.2 ¹
		≤ 0.5 ²	≤ 0.5 ²	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

Default Power Mode
<n2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	24.0	0.0
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	23.06	23.20	23.05		
20	PI/2 BPSK	1	53	22.94	23.02	22.83	23.5	0.5
20	PI/2 BPSK	1	104	22.85	22.96	22.86		
20	PI/2 BPSK	50	0	22.38	22.50	22.32		
20	PI/2 BPSK	50	28	22.79	22.99	22.79	24.0	0.0
20	PI/2 BPSK	50	56	22.47	22.57	22.46		
20	PI/2 BPSK	100	0	22.40	22.56	22.44		
20	QPSK	1	1	22.77	23.00	22.79	23.0	1.0
20	QPSK	1	53	22.90	23.08	22.96		
20	QPSK	1	104	22.72	22.93	22.74		
20	QPSK	50	0	21.95	22.07	21.88	24.0	0.0
20	QPSK	50	28	22.83	22.93	22.78		
20	QPSK	50	56	21.91	21.99	21.90		
20	QPSK	100	0	21.96	22.06	21.87	23.0	1.0
20	16QAM	1	1	21.71	21.78	21.64		
20	64QAM	1	1	20.88	21.00	20.91		
20	256QAM	1	1	18.10	18.28	18.04	19.5	4.5
Channel				371500	376000	380500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	22.99	23.11	23.01	24.0	0.0
Channel				371000	376000	381000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	PI/2 BPSK	1	1	23.02	23.13	23.02	24.0	0.0
Channel				370500	376000	381500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	23.05	23.17	22.99	24.0	0.0

<n2 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	24.0	0.0
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	23.64	23.73	23.58		
20	PI/2 BPSK	1	53	23.61	23.62	23.58	23.5	0.5
20	PI/2 BPSK	1	104	23.56	23.70	23.56		
20	PI/2 BPSK	50	0	23.25	23.26	23.18		
20	PI/2 BPSK	50	28	23.59	23.62	23.61	23.5	0.0
20	PI/2 BPSK	50	56	23.18	23.18	23.12		
20	PI/2 BPSK	100	0	23.10	23.11	23.10		
20	QPSK	1	1	23.54	23.61	23.53	24.0	0.0
20	QPSK	1	53	23.53	23.54	23.53		
20	QPSK	1	104	23.49	23.56	23.49		
20	QPSK	50	0	22.68	22.78	22.74	23.0	1.0
20	QPSK	50	28	23.49	23.54	23.49		
20	QPSK	50	56	22.53	22.61	22.60		
20	QPSK	100	0	22.67	22.67	22.66	23.0	1.0
20	16QAM	1	1	22.82	22.91	22.88		
20	64QAM	1	1	21.43	21.43	21.33		
20	256QAM	1	1	18.87	18.93	18.85	19.5	4.5
Channel				371500	376000	380500	24.0	0.0
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	23.51	23.61	23.52	24.0	0.0
Channel				371000	376000	381000		
Frequency (MHz)				1855	1880	1905	24.0	0.0
10	PI/2 BPSK	1	1	23.53	23.49	23.62		
Channel				370500	376000	381500	24.0	0.0
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	23.66	23.60	23.55	24.0	0.0

<n5 Main >

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	24.0	0.0
Frequency (MHz)				834	836.5	839		
20	PI/2 BPSK	1	1	23.54	23.58	23.47		
20	PI/2 BPSK	1	53	23.36	23.47	23.34	23.5	0.5
20	PI/2 BPSK	1	104	23.16	23.21	23.09		
20	PI/2 BPSK	50	0	22.88	23.00	22.87		
20	PI/2 BPSK	50	28	23.24	23.28	23.18	23.5	0.0
20	PI/2 BPSK	50	56	22.71	22.78	22.67		
20	PI/2 BPSK	100	0	22.88	22.94	22.85		
20	QPSK	1	1	23.29	23.42	23.30	24.0	0.0
20	QPSK	1	53	23.35	23.42	23.36		
20	QPSK	1	104	23.00	23.07	22.95		
20	QPSK	50	0	22.35	22.49	22.36	23.0	1.0
20	QPSK	50	28	23.15	23.20	23.14		
20	QPSK	50	56	22.30	22.29	22.24		
20	QPSK	100	0	22.37	22.43	22.26	23.0	1.0
20	16QAM	1	1	22.48	22.47	22.43		
20	64QAM	1	1	21.31	21.39	21.33		
20	256QAM	1	1	18.80	18.78	18.68	19.5	4.5
Channel				166300	167300	168300	24.0	0.0
Frequency (MHz)				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	23.48	23.53	23.45	24.0	0.0
Channel				165800	167300	168800		
Frequency (MHz)				829	836.5	844	24.0	0.0
10	PI/2 BPSK	1	1	23.44	23.52	23.39		
Channel				165300	167300	169300	24.0	0.0
Frequency (MHz)				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	23.52	23.49	23.43	24.0	0.0

<n7 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				502000	507000	512000	24.0	0.0
Frequency (MHz)				2510	2535	2560		
20	PI/2 BPSK	1	1	23.22	22.56	23.01		
20	PI/2 BPSK	1	53	23.76	23.04	23.57	23.5	0.5
20	PI/2 BPSK	1	104	23.57	22.84	23.33		
20	PI/2 BPSK	50	0	22.92	22.26	22.69		
20	PI/2 BPSK	50	28	23.67	22.97	23.37	23.5	0.5
20	PI/2 BPSK	50	56	23.14	22.55	22.96		
20	PI/2 BPSK	100	0	23.24	22.54	22.97		
20	QPSK	1	1	23.12	22.44	22.90	24.0	0.0
20	QPSK	1	53	23.71	22.97	23.50		
20	QPSK	1	104	23.49	22.80	23.24		
20	QPSK	50	0	22.73	22.05	22.51	23.0	1.0
20	QPSK	50	28	23.55	22.93	23.32		
20	QPSK	50	56	22.73	22.04	22.49		
20	QPSK	100	0	22.74	22.00	22.49	23.0	1.0
20	16QAM	1	1	22.01	21.35	21.83		
20	64QAM	1	1	21.43	20.84	21.28		
20	256QAM	1	1	18.97	18.29	18.79	19.5	4.5
Channel				501500	507000	512500	24.0	0.0
Frequency (MHz)				2507.5	2535	2562.5		
15	PI/2 BPSK	1	1	23.15	22.52	23.00	24.0	0.0
Channel				501000	507000	513000		
Frequency (MHz)				2505	2535	2565	24.0	0.0
10	PI/2 BPSK	1	1	23.21	22.48	22.91		
Channel				500500	507000	513500	24.0	0.0
Frequency (MHz)				2502.5	2535	2567.5		
5	PI/2 BPSK	1	1	23.18	22.50	23.01	24.0	0.0

<n12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700	24.0	0.0
Frequency (MHz)				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	23.75	23.89	23.82		
15	PI/2 BPSK	1	40	23.49	23.70	23.61	23.5	0.5
15	PI/2 BPSK	1	77	23.45	23.58	23.49		
15	PI/2 BPSK	36	0	23.10	23.26	23.24		
15	PI/2 BPSK	36	22	23.50	23.58	23.52	24.0	0.0
15	PI/2 BPSK	36	43	23.08	23.20	23.10		
15	PI/2 BPSK	75	0	23.12	23.20	23.17		
15	QPSK	1	1	23.59	23.70	23.62	23.0	1.0
15	QPSK	1	40	23.41	23.58	23.51		
15	QPSK	1	77	23.29	23.38	23.32		
15	QPSK	36	0	22.59	22.71	22.65	24.0	0.0
15	QPSK	36	22	23.45	23.54	23.43		
15	QPSK	36	43	22.48	22.63	22.59		
15	QPSK	75	0	22.63	22.73	22.72	23.0	1.0
15	16QAM	1	1	22.43	22.66	22.54		
15	64QAM	1	1	21.21	21.32	21.27		
15	256QAM	1	1	18.94	19.15	19.09	19.5	4.5
Channel				140800	141500	142200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				704	707.5	711		
10	PI/2 BPSK	1	1	23.74	23.89	23.80	24.0	0.0
Channel				140300	141500	142700	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	PI/2 BPSK	1	1	23.70	23.80	23.76	24.0	0.0

<n41 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	24.0	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	PI/2 BPSK	1	1	23.73	23.70	23.45		
100	PI/2 BPSK	1	137	23.60	23.57	23.37	24.0	0.0
100	PI/2 BPSK	1	271	23.61	23.52	23.37		
100	PI/2 BPSK	135	0	23.36	23.31	23.05		
100	PI/2 BPSK	135	69	23.64	23.57	23.59	24.0	0.0
100	PI/2 BPSK	135	138	23.44	23.53	23.22		
100	PI/2 BPSK	270	0	23.39	23.30	23.06		
100	QPSK	1	1	22.97	22.92	22.73	24.0	0.0
100	QPSK	1	137	23.28	23.24	23.06		
100	QPSK	1	271	23.17	23.12	22.93		
100	QPSK	135	0	23.30	23.23	23.05	24.0	0.0
100	QPSK	135	69	23.52	23.58	23.42		
100	QPSK	135	138	23.52	23.53	23.26		
100	QPSK	270	0	22.83	22.87	22.61	23.0	1.0
100	16QAM	1	1	22.20	22.29	22.00	23.0	1.0
100	64QAM	1	1	21.38	21.36	21.22	21.5	2.5
100	256QAM	1	1	19.29	19.34	19.39	19.5	4.5
Channel				508200	518598	528996	24.0	0.0
Frequency (MHz)				2541	2592.99	2644.98		
90	PI/2 BPSK	1	1	23.45	23.45	23.19	24.0	0.0
Channel				507204	518598	529998	24.0	0.0
Frequency (MHz)				2536.02	2592.99	2649.99		
80	PI/2 BPSK	1	1	23.40	23.35	23.11	24.0	0.0
Channel				505200	518598	531996	24.0	0.0
Frequency (MHz)				2526	2592.99	2659.98		
60	PI/2 BPSK	1	1	23.47	23.39	23.15	24.0	0.0
Channel				504204	518598	532998	24.0	0.0
Frequency (MHz)				2521.02	2592.99	2664.99		
50	PI/2 BPSK	1	1	23.39	23.40	23.16	24.0	0.0
Channel				503202	518598	534000	24.0	0.0
Frequency (MHz)				2516.01	2592.99	2670		
40	PI/2 BPSK	1	1	23.48	23.38	23.14	24.0	0.0
Channel				501204	518598	535998	24.0	0.0
Frequency (MHz)				2506.02	2592.99	2679.99		
20	PI/2 BPSK	1	1	23.40	23.44	23.11	24.0	0.0

<n66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000	24.0	0.0
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	23.00	23.05	23.07		
20	PI/2 BPSK	1	53	22.87	22.93	22.95	23.5	0.5
20	PI/2 BPSK	1	104	22.93	22.93	22.98		
20	PI/2 BPSK	50	0	22.43	22.55	22.48		
20	PI/2 BPSK	50	28	22.85	22.88	22.95	24.0	0.0
20	PI/2 BPSK	50	56	22.46	22.45	22.47		
20	PI/2 BPSK	100	0	22.49	22.56	22.61		
20	QPSK	1	1	22.86	22.86	22.88	23.0	1.0
20	QPSK	1	53	22.90	22.92	22.92		
20	QPSK	1	104	22.80	22.86	22.92		
20	QPSK	50	0	22.02	22.01	22.08	24.0	0.0
20	QPSK	50	28	22.80	22.93	22.92		
20	QPSK	50	56	21.95	21.96	22.01		
20	QPSK	100	0	21.97	22.01	21.99	23.0	1.0
20	16QAM	1	1	21.84	21.92	21.97		
20	64QAM	1	1	20.82	20.88	20.84		
20	256QAM	1	1	18.24	18.21	18.29	19.5	4.5
Channel				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	22.90	22.99	23.04	24.0	0.0
Channel				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	23.00	22.96	22.98	24.0	0.0
Channel				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	22.97	22.95	23.05	24.0	0.0

<n66 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000	24.0	0.0
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	23.69	23.92	23.76		
20	PI/2 BPSK	1	53	23.65	23.73	23.63	23.5	0.5
20	PI/2 BPSK	1	104	23.59	23.69	23.64		
20	PI/2 BPSK	50	0	23.29	23.34	23.34		
20	PI/2 BPSK	50	28	23.75	23.76	23.70	23.5	0.0
20	PI/2 BPSK	50	56	23.32	23.39	23.38		
20	PI/2 BPSK	100	0	23.18	23.27	23.20		
20	QPSK	1	1	23.60	23.60	23.58	24.0	0.0
20	QPSK	1	53	23.73	23.83	23.78		
20	QPSK	1	104	23.77	23.87	23.77		
20	QPSK	50	0	22.95	22.98	22.94	23.0	1.0
20	QPSK	50	28	23.85	23.91	23.81		
20	QPSK	50	56	22.91	22.94	22.87		
20	QPSK	100	0	22.87	22.89	22.89	23.0	1.0
20	16QAM	1	1	21.84	21.92	21.97		
20	64QAM	1	1	20.82	20.88	20.84		
20	256QAM	1	1	18.24	18.21	18.29	19.5	4.5
Channel				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	23.60	23.86	23.75	24.0	0.0
Channel				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	23.63	23.91	23.76	24.0	0.0
Channel				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	23.59	23.91	23.71	24.0	0.0

<n71 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600	24.0	0.0
Frequency (MHz)				673	680.5	688		
20	PI/2 BPSK	1	1	23.98	23.90	23.77		
20	PI/2 BPSK	1	53	23.84	23.83	23.62	23.5	0.5
20	PI/2 BPSK	1	104	23.60	23.52	23.42		
20	PI/2 BPSK	50	0	23.31	23.32	23.21		
20	PI/2 BPSK	50	28	23.68	23.64	23.48	23.5	0.0
20	PI/2 BPSK	50	56	23.13	23.17	23.06		
20	PI/2 BPSK	100	0	23.31	23.25	23.18		
20	QPSK	1	1	23.72	23.75	23.61	24.0	0.0
20	QPSK	1	53	23.77	23.70	23.62		
20	QPSK	1	104	23.47	23.56	23.37		
20	QPSK	50	0	22.83	22.78	22.66	23.0	1.0
20	QPSK	50	28	23.61	23.61	23.49		
20	QPSK	50	56	22.77	22.76	22.56		
20	QPSK	100	0	22.81	22.77	22.64	23.0	1.0
20	16QAM	1	1	22.82	22.75	22.66		
20	64QAM	1	1	21.34	21.34	21.16		
20	256QAM	1	1	19.19	19.28	19.06	19.5	4.5
Channel				134100	136100	138100	24.0	0.0
Frequency (MHz)				670.5	680.5	690.5		
15	PI/2 BPSK	1	1	23.89	23.85	23.68	24.0	0.0
Channel				133600	136100	138600		
Frequency (MHz)				668	680.5	693	24.0	0.0
10	PI/2 BPSK	1	1	23.88	23.81	23.73		
Channel				133100	136100	139100	24.0	0.0
Frequency (MHz)				665.5	680.5	695.5		
5	PI/2 BPSK	1	1	23.91	23.89	23.73	24.0	0.0



Reduced Power Mode

<n2 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	13.5	0.0
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	12.54	12.52	12.48		
20	PI/2 BPSK	1	53	12.75	12.77	12.69	13.5	0.0
20	PI/2 BPSK	1	104	12.45	12.45	12.39		
20	PI/2 BPSK	50	0	12.50	12.52	12.52		
20	PI/2 BPSK	50	28	12.43	12.52	12.43	13.5	0.0
20	PI/2 BPSK	50	56	12.46	12.55	12.52	13.5	0.0
20	PI/2 BPSK	100	0	12.45	12.49	12.46		
20	QPSK	1	1	12.56	12.61	12.60		
20	QPSK	1	53	12.40	12.46	12.39	13.5	0.0
20	QPSK	1	104	12.43	12.52	12.42		
20	QPSK	50	0	12.44	12.46	12.43		
20	QPSK	50	28	12.48	12.50	12.50	13.5	0.0
20	QPSK	50	56	12.46	12.54	12.53	13.5	0.0
20	QPSK	100	0	12.46	12.53	12.51		
20	16QAM	1	1	12.38	12.42	12.32		
20	64QAM	1	1	12.67	12.75	12.65	13.5	0.0
20	256QAM	1	1	11.93	11.95	11.85	12.5	1.0
Channel				371500	376000	380500	13.5	0.0
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	12.44	12.44	12.42	13.5	0.0
Channel				370000	376000	382000	13.5	0.0
Frequency (MHz)				1850	1880	1910		
10	PI/2 BPSK	1	1	12.52	12.48	12.47	13.5	0.0
Channel				370500	376000	381500	13.5	0.0
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	12.50	12.42	12.43	13.5	0.0

<n2 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				372000	376000	380000	12.5	0.0
Frequency (MHz)				1860	1880	1900		
20	PI/2 BPSK	1	1	11.38	11.31	11.24		
20	PI/2 BPSK	1	53	11.84	11.79	11.70	12.5	0.0
20	PI/2 BPSK	1	104	11.25	11.24	11.15		
20	PI/2 BPSK	50	0	11.16	11.20	11.05		
20	PI/2 BPSK	50	28	11.30	11.30	11.18	12.5	0.0
20	PI/2 BPSK	50	56	11.40	11.38	11.21	12.5	0.0
20	PI/2 BPSK	100	0	11.34	11.31	11.19		
20	QPSK	1	1	11.38	11.33	11.17		
20	QPSK	1	53	11.34	11.31	11.17	12.5	0.0
20	QPSK	1	104	11.18	11.15	11.03		
20	QPSK	50	0	11.38	11.35	11.21		
20	QPSK	50	28	11.37	11.32	11.23	12.5	0.0
20	QPSK	50	56	11.24	11.25	11.11	12.5	0.0
20	QPSK	100	0	11.27	11.32	11.22		
20	16QAM	1	1	11.32	11.29	11.13		
20	64QAM	1	1	11.49	11.52	11.36	12.5	0.0
20	256QAM	1	1	10.96	10.99	10.90	11.5	1.0
Channel				371500	376000	380500	12.5	0.0
Frequency (MHz)				1857.5	1880	1902.5		
15	PI/2 BPSK	1	1	11.32	11.23	11.24	12.5	0.0
Channel				371000	376000	381000	12.5	0.0
Frequency (MHz)				1855	1880	1905		
10	PI/2 BPSK	1	1	11.36	11.30	11.19	12.5	0.0
Channel				370500	376000	381500	12.5	0.0
Frequency (MHz)				1852.5	1880	1907.5		
5	PI/2 BPSK	1	1	11.36	11.28	11.18	12.5	0.0

<n5 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				166800	167300	167800	15.5	0.0
Frequency (MHz)				834	836.5	839		
20	PI/2 BPSK	1	1	14.55	14.75	14.50		
20	PI/2 BPSK	1	53	14.47	14.63	14.42	15.5	0.0
20	PI/2 BPSK	1	104	14.12	14.36	14.06		
20	PI/2 BPSK	50	0	14.40	14.57	14.33		
20	PI/2 BPSK	50	28	14.29	14.46	14.20	15.5	0.0
20	PI/2 BPSK	50	56	14.28	14.53	14.25	15.5	0.0
20	PI/2 BPSK	100	0	14.35	14.57	14.32		
20	QPSK	1	1	14.42	14.57	14.32		
20	QPSK	1	53	14.28	14.48	14.23	15.5	0.0
20	QPSK	1	104	14.20	14.43	14.17		
20	QPSK	50	0	14.40	14.60	14.35		
20	QPSK	50	28	14.34	14.51	14.22	15.5	0.0
20	QPSK	50	56	14.20	14.43	14.13	15.5	0.0
20	QPSK	100	0	14.34	14.56	14.35		
20	16QAM	1	1	14.41	14.58	14.32		
20	64QAM	1	1	14.35	14.54	14.25	15.5	0.0
20	256QAM	1	1	14.04	14.19	13.96	15.0	0.5
Channel				166300	167300	168300	15.5	0.0
Frequency (MHz)				831.5	836.5	841.5		
15	PI/2 BPSK	1	1	14.52	14.68	14.50	15.5	0.0
Channel				165800	167300	168800	15.5	0.0
Frequency (MHz)				829	836.5	844		
10	PI/2 BPSK	1	1	14.49	14.67	14.49	15.5	0.0
Channel				165300	167300	169300	15.5	0.0
Frequency (MHz)				826.5	836.5	846.5		
5	PI/2 BPSK	1	1	14.47	14.61	14.45	15.5	0.0

<n7 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				502000	507000	512000	10.0	0.0
Frequency (MHz)				2510	2535	2560		
20	PI/2 BPSK	1	1	9.29	9.42	9.32		
20	PI/2 BPSK	1	53	9.69	9.84	9.67	10.0	0.0
20	PI/2 BPSK	1	104	9.19	9.32	9.15		
20	PI/2 BPSK	50	0	9.15	9.32	9.12		
20	PI/2 BPSK	50	28	9.21	9.34	9.21	10.0	0.0
20	PI/2 BPSK	50	56	9.22	9.36	9.23	10.0	0.0
20	PI/2 BPSK	100	0	9.23	9.36	9.22		
20	QPSK	1	1	9.28	9.41	9.23		
20	QPSK	1	53	9.24	9.40	9.24	10.0	0.0
20	QPSK	1	104	9.14	9.36	9.21		
20	QPSK	50	0	9.13	9.29	9.10		
20	QPSK	50	28	9.16	9.38	9.21	10.0	0.0
20	QPSK	50	56	9.19	9.36	9.25	10.0	0.0
20	QPSK	100	0	9.18	9.33	9.15		
20	16QAM	1	1	9.18	9.41	9.23		
20	64QAM	1	1	9.35	9.49	9.32	10.0	0.0
20	256QAM	1	1	8.99	9.13	9.00	9.5	0.5
Channel				501500	507000	512500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	PI/2 BPSK	1	1	9.20	9.40	9.29	10.0	0.0
Channel				501000	507000	513000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	PI/2 BPSK	1	1	9.22	9.35	9.23	10.0	0.0
Channel				500500	507000	513500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	PI/2 BPSK	1	1	9.23	9.33	9.26	10.0	0.0

<n12 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				141300	141500	141700	15.5	0.0
Frequency (MHz)				706.5	707.5	708.5		
15	PI/2 BPSK	1	1	14.27	14.41	14.32		
15	PI/2 BPSK	1	40	13.98	13.87	14.08	15.5	0.0
15	PI/2 BPSK	1	77	13.94	13.79	13.92		
15	PI/2 BPSK	36	0	14.07	14.11	14.08		
15	PI/2 BPSK	36	22	13.98	13.91	14.09	15.5	0.0
15	PI/2 BPSK	36	43	13.94	13.84	13.97	15.5	0.0
15	PI/2 BPSK	75	0	14.04	13.95	14.07		
15	QPSK	1	1	14.12	13.97	14.18		
15	QPSK	1	40	14.07	13.90	14.08	15.5	0.0
15	QPSK	1	77	13.88	13.75	13.94		
15	QPSK	36	0	14.10	14.01	14.23		
15	QPSK	36	22	14.02	13.90	14.08	15.5	0.0
15	QPSK	36	43	13.95	13.87	14.05	15.5	0.0
15	QPSK	75	0	14.06	13.93	14.13		
15	16QAM	1	1	14.20	14.07	14.27		
15	64QAM	1	1	14.13	14.04	14.19	15.5	0.0
	256QAM	1	1	13.71	13.62	13.79	15.0	0.5
Channel				140800	141500	142200	15.5	0.0
Frequency (MHz)				704	707.5	711		
10	PI/2 BPSK	1	1	17.72	17.88	17.82	15.5	0.0
Channel				140300	141500	142700	15.5	0.0
Frequency (MHz)				701.5	707.5	713.5		
5	PI/2 BPSK	1	1	17.71	17.84	17.72	15.5	0.0

<n41 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				509202	518598	528000	9.5	0.0
Frequency (MHz)				2546.01	2592.99	2640		
100	PI/2 BPSK	1	1	8.97	9.34	9.37		
100	PI/2 BPSK	1	137	8.74	9.21	9.12	9.5	0.0
100	PI/2 BPSK	1	271	8.55	8.97	8.95		
100	PI/2 BPSK	135	0	8.74	9.20	9.14		
100	PI/2 BPSK	135	69	8.85	9.27	9.29	9.5	0.0
100	PI/2 BPSK	135	138	8.66	9.05	8.96		
100	PI/2 BPSK	270	0	8.71	9.12	9.02		
100	QPSK	1	1	8.68	9.09	9.09	9.5	0.0
100	QPSK	1	137	8.71	9.14	9.05		
100	QPSK	1	271	8.44	8.91	8.90		
100	QPSK	135	0	8.72	9.19	9.12	9.5	0.0
100	QPSK	135	69	8.81	9.25	9.17		
100	QPSK	135	138	8.71	9.08	9.04		
100	QPSK	270	0	8.69	9.14	9.06	9.5	0.0
100	16QAM	1	1	8.67	9.12	9.08	9.5	0.0
100	64QAM	1	1	8.68	9.05	9.02	9.5	0.0
100	256QAM	1	1	8.54	8.91	8.85	9.5	0.0
Channel				508200	518598	528996	9.5	0.0
Frequency (MHz)				2541	2592.99	2644.98		
90	PI/2 BPSK	1	1	8.89	9.28	9.34	9.5	0.0
Channel				507204	518598	529998	9.5	0.0
Frequency (MHz)				2536.02	2592.99	2649.99		
80	PI/2 BPSK	1	1	8.95	9.24	9.29	9.5	0.0
Channel				505200	518598	531996	9.5	0.0
Frequency (MHz)				2526	2592.99	2659.98		
60	PI/2 BPSK	1	1	8.92	9.34	9.32	9.5	0.0
Channel				504204	518598	532998	9.5	0.0
Frequency (MHz)				2521.02	2592.99	2664.99		
50	PI/2 BPSK	1	1	8.97	9.34	9.32	9.5	0.0
Channel				503202	518598	534000	9.5	0.0
Frequency (MHz)				2516.01	2592.99	2670		
40	PI/2 BPSK	1	1	8.95	9.29	9.30	9.5	0.0
Channel				501204	518598	535998	9.5	0.0
Frequency (MHz)				2506.02	2592.99	2679.99		
20	PI/2 BPSK	1	1	8.89	9.30	9.32	9.5	0.0

<n66 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000	14.0	0.0
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	13.31	13.35	13.24		
20	PI/2 BPSK	1	53	13.59	13.65	13.51	14.0	0.0
20	PI/2 BPSK	1	104	13.24	13.29	13.14		
20	PI/2 BPSK	50	0	13.23	13.28	13.10		
20	PI/2 BPSK	50	28	13.29	13.29	13.12	14.0	0.0
20	PI/2 BPSK	50	56	13.18	13.28	13.11	14.0	0.0
20	PI/2 BPSK	100	0	13.31	13.33	13.20		
20	QPSK	1	1	13.30	13.31	13.11		
20	QPSK	1	53	13.29	13.35	13.20	14.0	0.0
20	QPSK	1	104	13.26	13.27	13.10		
20	QPSK	50	0	13.21	13.31	13.19		
20	QPSK	50	28	13.25	13.32	13.12	14.0	0.0
20	QPSK	50	56	13.25	13.32	13.19	14.0	0.0
20	QPSK	100	0	13.21	13.25	13.12		
20	16QAM	1	1	13.19	13.27	13.02		
20	64QAM	1	1	13.24	13.27	13.13	14.0	0.0
20	256QAM	1	1	13.13	13.15	13.07	14.0	0.0
Channel				343500	349000	354500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	13.25	13.29	13.18	14.0	0.0
Channel				343000	349000	355000	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	PI/2 BPSK	1	1	13.25	13.34	13.14	14.0	0.0
Channel				342500	349000	355500	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	13.23	13.31	13.16	14.0	0.0

<n66 MIMO2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				344000	349000	354000	12.5	0.0
Frequency (MHz)				1720	1745	1770		
20	PI/2 BPSK	1	1	10.54	10.59	10.49		
20	PI/2 BPSK	1	53	10.81	10.93	10.80	12.5	0.0
20	PI/2 BPSK	1	104	10.39	10.54	10.42		
20	PI/2 BPSK	50	0	10.40	10.51	10.32		
20	PI/2 BPSK	50	28	10.39	10.47	10.30	12.5	0.0
20	PI/2 BPSK	50	56	10.34	10.46	10.30		
20	PI/2 BPSK	100	0	10.44	10.53	10.41		
20	QPSK	1	1	10.48	10.56	10.43	12.5	0.0
20	QPSK	1	53	10.23	10.38	10.27		
20	QPSK	1	104	10.34	10.48	10.38		
20	QPSK	50	0	10.50	10.59	10.45	12.5	0.0
20	QPSK	50	28	10.42	10.53	10.37		
20	QPSK	50	56	10.43	10.55	10.37		
20	QPSK	100	0	10.42	10.48	10.34	12.5	0.0
20	16QAM	1	1	10.33	10.47	10.35		
20	64QAM	1	1	10.39	10.48	10.30		
20	256QAM	1	1	10.41	10.42	10.25	12.5	0.0
Channel				343500	349000	354500	12.5	0.0
Frequency (MHz)				1717.5	1745	1772.5		
15	PI/2 BPSK	1	1	10.52	10.57	10.45	12.5	0.0
Channel				343000	349000	355000		
Frequency (MHz)				1715	1745	1775	12.5	0.0
10	PI/2 BPSK	1	1	10.51	10.53	10.43		
Channel				342500	349000	355500	12.5	0.0
Frequency (MHz)				1712.5	1745	1777.5		
5	PI/2 BPSK	1	1	10.50	10.58	10.45	12.5	0.0

<n71 Main>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				134600	136100	137600	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				673	680.5	688		
20	PI/2 BPSK	1	1	15.60	15.48	15.41	16.0	0.0
20	PI/2 BPSK	1	53	15.25	15.22	15.05		
20	PI/2 BPSK	1	104	14.70	14.67	14.54		
20	PI/2 BPSK	50	0	14.87	14.81	14.65	16.0	0.0
20	PI/2 BPSK	50	28	14.85	14.75	14.61	16.0	0.0
20	PI/2 BPSK	50	56	14.70	14.65	14.47	16.0	0.0
20	PI/2 BPSK	100	0	14.90	14.80	14.70		
20	QPSK	1	1	14.72	14.69	14.56	16.0	0.0
20	QPSK	1	53	14.86	14.84	14.73		
20	QPSK	1	104	14.72	14.61	14.44		
20	QPSK	50	0	14.94	14.85	14.74	16.0	0.0
20	QPSK	50	28	14.81	14.76	14.66	16.0	0.0
20	QPSK	50	56	14.73	14.69	14.50	16.0	0.0
20	QPSK	100	0	14.80	14.77	14.64		
20	16QAM	1	1	14.75	14.72	14.63	16.0	0.0
20	64QAM	1	1	15.01	14.97	14.88	16.0	0.0
20	256QAM	1	1	14.57	14.54	14.36	15.5	0.5
Channel				134100	136100	138100	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				670.5	680.5	690.5		
15	PI/2 BPSK	1	1	15.56	15.43	15.41	16.0	0.0
Channel				133600	136100	138600	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	680.5	693		
10	PI/2 BPSK	1	1	15.60	15.40	15.39	16.0	0.0
Channel				133100	136100	139100	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	680.5	695.5		
5	PI/2 BPSK	1	1	15.58	15.45	15.32	16.0	0.0

<SAR test exclusion table>
General Note:

- The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
- Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

<Main Antenna>

	Wireless Interface	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71/n71	LTE Band 12/17/n12	LTE Band 14	LTE Band 13	LTE Band 5/n5	LTE Band 26	LTE Band 4	LTE Band 66/n66	LTE Band 2/n2	LTE Band 25	LTE Band 30	LTE Band 7	LTE Band 38	LTE Band 41
Exposure Position	Calculated Frequency	846MHz	1750MHz	1907MHz	695MHz	715MHz	795MHz	784MHz	848MHz	848MHz	1754MHz	1779MHz	1909MHz	1914MHz	2312MHz	2567MHz	2617MHz	2687MHz
	Maximum power (dBm)	24.50	24.50	24.50	24.5	24.5	24.5	24.5	24.5	24.5	24	24	24	24	23	24	24	24
	Maximum rated power(mW)	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	282.0	251.0	251.0	251.0	251.0	200.0	251.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0																
	exclusion threshold	51.9	74.6	77.9	47.0	47.7	50.3	49.9	51.9	51.9	66.5	67.0	69.4	69.5	60.8	80.4	81.2	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0																
	exclusion threshold	51.9	74.6	77.9	47.0	47.7	50.3	49.9	51.9	51.9	66.5	67.0	69.4	69.5	60.8	80.4	81.2	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	5.0																
	exclusion threshold	51.9	74.6	77.9	47.0	47.7	50.3	49.9	51.9	51.9	66.5	67.0	69.4	69.5	60.8	80.4	81.2	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 3	Separation distance(mm)	210.2																
	exclusion threshold	1067.0	1715.0	1711.0	922.0	941.0	1017.0	1007.0	1069.0	1069.0	1715.0	1714.0	1711.0	1710.0	1701.0	1696.0	1695.0	1694.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	225.5																
	exclusion threshold	1153.0	1868.0	1864.0	993.0	1014.0	1098.0	1087.0	1155.0	1155.0	1868.0	1867.0	1864.0	1863.0	1854.0	1849.0	1848.0	1847.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Bottom of Laptop	Separation distance(mm)	5.0																
	exclusion threshold	51.9	74.6	77.9	47.0	47.7	50.3	49.9	51.9	51.9	66.5	67.0	69.4	69.5	60.8	80.4	81.2	82.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes



<MIMO2 Antenna>

Exposure Position	Wireless Interface	LTE Band 66	LTE Band 2	LTE Band 7	LTE Band 48	LTE Band n2	LTE Band n7	LTE Band n41	LTE Band n66
	Calculated Frequency	1779MHz	1909MHz	2567MHz	3697MHz	1909MHz	2567MHz	2687MHz	1779MHz
	Maximum power (dBm)	24	24	24	22	24	24	24	24
	Maximum rated power(mW)	251.0	251.0	251.0	158.0	251.0	251.0	251.0	251.0
Bottom Face	Separation distance(mm)	5.0							
	exclusion threshold	67.0	69.4	80.4	60.8	69.4	80.4	82.3	67.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	35.1							
	exclusion threshold	9.5	9.9	11.5	8.7	9.9	11.5	11.7	9.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	289.6							
	exclusion threshold	2508.0	2504.0	2489.0	2474.0	2504.0	2489.0	2487.0	2508.0
	Testing required?	No	No	No	No	No	No	No	No
Edge 3	Separation distance(mm)	146.3							
	exclusion threshold	1076.0	1072.0	1057.0	1041.0	1072.0	1057.0	1055.0	1076.0
	Testing required?	No	No	No	No	No	No	No	No
Edge 4	Separation distance(mm)	5.0							
	exclusion threshold	67.0	69.4	80.4	60.8	69.4	80.4	82.3	67.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom of Laptop	Separation distance(mm)	5.0							
	exclusion threshold	67.0	69.4	80.4	60.8	69.4	80.4	82.3	67.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. For the exposure positions that proximity sensor power reduction is applied for SAR compliance, additional SAR testing with EUT transmitting full power in sensor trigger distance was performed; 13mm for bottom face of main antenna, 16mm for bottom of Laptop of main antenna, 22mm for edge1 of main antenna, 14mm for edge2 of main antenna, 15mm for bottom of Laptop of MIMO2 antenna 12mm for bottom face of MIMO2 antenna and 9mm for edge4 of MIMO2 antenna. These test results just verification the sensor trigger distance to meet KDB 616217 requirement, when in normal usage will not operate at trigger distance, therefore, these results were not using performed Sim-Tx analysis

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B17/B26/B38/B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/4/17/38 SAR test was covered by Band 25/66/12/41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
 - c. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5/n12/n41/n71 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**14.1 Body SAR****<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9538	1907.6	15.31	16.00	1.172	-0.12	0.772	0.905
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9262	1852.4	15.07	16.00	1.239	0.06	0.730	0.904
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	9400	1880	15.22	16.00	1.197	-0.03	0.686	0.821
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9538	1907.6	15.31	16.00	1.172	-0.1	0.774	0.907
01	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9262	1852.4	15.07	16.00	1.239	-0.11	0.894	1.107
	WCDMA II	RMC 12.2Kbps	Bottom Face	0mm	ON	9400	1880	15.22	16.00	1.197	0.07	0.851	1.018
	WCDMA II	RMC 12.2Kbps	Edge 1	0mm	ON	9538	1907.6	15.31	16.00	1.172	-0.02	0.136	0.159
	WCDMA II	RMC 12.2Kbps	Edge 2	0mm	ON	9538	1907.6	15.31	16.00	1.172	-0.08	0.333	0.390
	WCDMA II	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	9262	1852.4	24.02	24.50	1.117	-0.02	0.371	0.414
	WCDMA II	RMC 12.2Kbps	Bottom Face	13mm	OFF	9262	1852.4	24.02	24.50	1.117	-0.09	0.497	0.555
	WCDMA II	RMC 12.2Kbps	Edge 1	22mm	OFF	9262	1852.4	24.02	24.50	1.117	0.01	0.063	0.070
	WCDMA II	RMC 12.2Kbps	Edge 2	14mm	OFF	9262	1852.4	24.02	24.50	1.117	0.06	0.202	0.226
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1413	1732.6	16.50	17.00	1.122	0.16	0.976	1.095
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1312	1712.4	16.47	17.00	1.130	0.02	0.938	1.060
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	1513	1752.6	16.48	17.00	1.127	0.15	0.869	0.980
02	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1413	1732.6	16.50	17.00	1.122	-0.12	1.060	1.189
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1312	1712.4	16.47	17.00	1.130	0.01	1.030	1.164
	WCDMA IV	RMC 12.2Kbps	Bottom Face	0mm	ON	1513	1752.6	16.48	17.00	1.127	-0.12	0.927	1.045
	WCDMA IV	RMC 12.2Kbps	Edge 1	0mm	ON	1413	1732.6	16.50	17.00	1.122	0.05	0.178	0.200
	WCDMA IV	RMC 12.2Kbps	Edge 2	0mm	ON	1413	1732.6	16.50	17.00	1.122	-0.02	0.467	0.524
	WCDMA IV	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	1413	1732.6	23.92	24.50	1.143	-0.01	0.443	0.506
	WCDMA IV	RMC 12.2Kbps	Bottom Face	13mm	OFF	1413	1732.6	23.92	24.50	1.143	-0.09	0.438	0.501
	WCDMA IV	RMC 12.2Kbps	Edge 1	22mm	OFF	1413	1732.6	23.92	24.50	1.143	0.05	0.083	0.095
	WCDMA IV	RMC 12.2Kbps	Edge 2	14mm	OFF	1413	1732.6	23.92	24.50	1.143	-0.02	0.213	0.244
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	4182	836.4	20.21	20.50	1.069	-0.17	0.878	0.939
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	4132	826.4	20.15	20.50	1.084	-0.15	0.872	0.945
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	0mm	ON	4233	846.6	20.20	20.50	1.072	-0.02	0.856	0.917
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4182	836.4	20.21	20.50	1.069	-0.03	0.909	0.972
	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4132	826.4	20.15	20.50	1.084	0.06	0.905	0.981
03	WCDMA V	RMC 12.2Kbps	Bottom Face	0mm	ON	4233	846.6	20.20	20.50	1.072	-0.11	1.020	1.093
	WCDMA V	RMC 12.2Kbps	Edge 1	0mm	ON	4182	836.4	20.21	20.50	1.069	0	0.539	0.576
	WCDMA V	RMC 12.2Kbps	Edge 2	0mm	ON	4182	836.4	20.21	20.50	1.069	-0.01	0.033	0.035
	WCDMA V	RMC 12.2Kbps	Bottom of Laptop	16mm	OFF	4182	836.4	24.22	24.50	1.067	-0.05	0.202	0.215
	WCDMA V	RMC 12.2Kbps	Bottom Face	13mm	OFF	4182	836.4	24.22	24.50	1.067	-0.01	0.423	0.451
	WCDMA V	RMC 12.2Kbps	Edge 1	22mm	OFF	4182	836.4	24.22	24.50	1.067	-0.08	0.176	0.188
	WCDMA V	RMC 12.2Kbps	Edge 2	14mm	OFF	4182	836.4	24.22	24.50	1.067	0.02	0.001	0.001

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	18700	1860	11.80	12.50	1.175	0.18	0.315	0.370
	LTE Band 2 MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	18700	1860	11.74	12.50	1.191	0.11	0.305	0.363
	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	18700	1860	11.80	12.50	1.175	0.01	0.530	0.623
04	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	18900	1880	11.67	12.50	1.211	-0.04	0.569	0.689
	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	19100	1900	11.64	12.50	1.219	-0.05	0.562	0.685
	LTE Band 2 MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	18700	1860	11.74	12.50	1.191	0.03	0.558	0.665
	LTE Band 2 MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	18700	1860	11.80	12.50	1.175	-0.11	0.249	0.293
	LTE Band 2 MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	18700	1860	11.74	12.50	1.191	0.09	0.234	0.279
	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	19100	1900	22.74	24.00	1.337	0.07	0.096	0.128
	LTE Band 2 MIMO2	20M	QPSK	50	0	Bottom of Laptop	15mm	OFF	19100	1900	22.56	23.00	1.107	0.03	0.092	0.102
	LTE Band 2 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	19100	1900	22.74	24.00	1.337	-0.17	0.050	0.067
	LTE Band 2 MIMO2	20M	QPSK	50	0	Bottom Face	12mm	OFF	19100	1900	22.56	23.00	1.107	-0.09	0.048	0.053
	LTE Band 2 MIMO2	20M	QPSK	1	0	Edge 1	0mm	OFF	19100	1900	22.74	24.00	1.337	-0.02	0.088	0.118
	LTE Band 2 MIMO2	20M	QPSK	50	0	Edge 1	0mm	OFF	19100	1900	22.56	23.00	1.107	-0.1	0.074	0.082
	LTE Band 2 MIMO2	20M	QPSK	1	0	Edge 4	9mm	OFF	19100	1900	22.74	24.00	1.337	-0.06	0.111	0.148
	LTE Band 2 MIMO2	20M	QPSK	50	0	Edge 4	9mm	OFF	19100	1900	22.56	23.00	1.107	-0.02	0.103	0.114



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	20525	836.5	20.31	20.50	1.045	-0.04	0.897	0.937
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	20525	836.5	19.40	19.50	1.023	-0.09	0.734	0.751
	LTE Band 5	10M	QPSK	50	0	Bottom of Laptop	0mm	ON	20525	836.5	19.33	19.50	1.040	0.1	0.716	0.745
	LTE Band 5	10M	QPSK	1	0	Bottom Face	0mm	ON	20525	836.5	20.31	20.50	1.045	-0.04	1.090	1.139
	LTE Band 5	10M	QPSK	25	0	Bottom Face	0mm	ON	20525	836.5	19.40	19.50	1.023	0	0.904	0.925
	LTE Band 5	10M	QPSK	50	0	Bottom Face	0mm	ON	20525	836.5	19.33	19.50	1.040	0.06	0.877	0.912
	LTE Band 5	10M	QPSK	1	0	Edge 1	0mm	ON	20525	836.5	20.31	20.50	1.045	0.05	0.591	0.617
	LTE Band 5	10M	QPSK	25	0	Edge 1	0mm	ON	20525	836.5	19.40	19.50	1.023	0.03	0.485	0.496
	LTE Band 5	10M	QPSK	1	0	Edge 2	0mm	ON	20525	836.5	20.31	20.50	1.045	-0.1	0.030	0.031
	LTE Band 5	10M	QPSK	25	0	Edge 2	0mm	ON	20525	836.5	19.40	19.50	1.023	-0.03	0.020	0.020
	LTE Band 5	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	20525	836.5	23.74	24.50	1.191	-0.06	0.021	0.025
	LTE Band 5	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	20525	836.5	22.90	23.50	1.148	0.03	0.015	0.017
	LTE Band 5	10M	QPSK	1	0	Bottom Face	13mm	OFF	20525	836.5	23.74	24.50	1.191	0	0.410	0.488
	LTE Band 5	10M	QPSK	25	0	Bottom Face	13mm	OFF	20525	836.5	22.90	23.50	1.148	-0.04	0.361	0.414
	LTE Band 5	10M	QPSK	1	0	Edge 1	22mm	OFF	20525	836.5	23.74	24.50	1.191	-0.09	0.001	0.001
	LTE Band 5	10M	QPSK	25	0	Edge 1	22mm	OFF	20525	836.5	22.90	23.50	1.148	-0.06	0.001	0.001
	LTE Band 5	10M	QPSK	1	0	Edge 2	14mm	OFF	20525	836.5	23.74	24.50	1.191	-0.02	0.001	0.001
	LTE Band 5	10M	QPSK	25	0	Edge 2	14mm	OFF	20525	836.5	22.90	23.50	1.148	0.02	0.001	0.001
	LTE Band 5B	10M	QPSK	1	0	Bottom Face	0mm	ON	20525	836.5	19.83	20.50	1.167	-0.05	0.859	1.002
06	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	21100	2535	13.80	14.50	1.175	-0.08	0.455	0.535
	LTE Band 7	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	21100	2535	12.85	13.50	1.161	0.01	0.366	0.425
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	13.80	14.50	1.175	0.03	0.857	1.007
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	13.61	14.50	1.227	0.02	0.926	1.137
	LTE Band 7	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	13.60	14.50	1.230	-0.11	0.797	0.981
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0mm	ON	21100	2535	12.85	13.50	1.161	0.15	0.438	0.509
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0mm	ON	20850	2510	12.78	13.50	1.180	-0.11	0.680	0.803
	LTE Band 7	20M	QPSK	50	0	Bottom Face	0mm	ON	21350	2560	12.84	13.50	1.164	-0.02	0.600	0.698
	LTE Band 7	20M	QPSK	100	0	Bottom Face	0mm	ON	21100	2535	12.91	13.50	1.146	0.06	0.620	0.710
	LTE Band 7	20M	QPSK	1	0	Edge 1	0mm	ON	21100	2535	13.80	14.50	1.175	0.07	0.079	0.093
	LTE Band 7	20M	QPSK	50	0	Edge 1	0mm	ON	21100	2535	12.85	13.50	1.161	-0.09	0.062	0.072
	LTE Band 7	20M	QPSK	1	0	Edge 2	0mm	ON	21100	2535	13.80	14.50	1.175	0.11	0.167	0.196
	LTE Band 7	20M	QPSK	50	0	Edge 2	0mm	ON	21100	2535	12.85	13.50	1.161	-0.15	0.135	0.157
	LTE Band 7	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	21100	2535	23.88	24.00	1.028	-0.07	0.431	0.443
	LTE Band 7	20M	QPSK	50	50	Bottom of Laptop	16mm	OFF	21100	2535	22.62	23.00	1.091	0.04	0.343	0.374
	LTE Band 7	20M	QPSK	1	0	Bottom Face	13mm	OFF	21100	2535	23.88	24.00	1.028	-0.06	0.485	0.499
	LTE Band 7	20M	QPSK	50	50	Bottom Face	13mm	OFF	21100	2535	22.62	23.00	1.091	-0.02	0.395	0.431
	LTE Band 7	20M	QPSK	1	0	Edge 1	22mm	OFF	21100	2535	23.88	24.00	1.028	-0.1	0.001	0.001
	LTE Band 7	20M	QPSK	50	50	Edge 1	22mm	OFF	21100	2535	22.62	23.00	1.091	-0.06	0.001	0.001
	LTE Band 7	20M	QPSK	1	0	Edge 2	14mm	OFF	21100	2535	23.88	24.00	1.028	-0.04	0.110	0.113
	LTE Band 7	20M	QPSK	50	50	Edge 2	14mm	OFF	21100	2535	22.62	23.00	1.091	0.05	0.085	0.093
	LTE Band 7C	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	14.41	14.50	1.021	-0.15	1.050	1.072
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	21100	2535	11.33	12.00	1.167	-0.18	0.169	0.197
	LTE Band 7 MIMO2	20M	QPSK	50	24	Bottom of Laptop	0mm	ON	21100	2535	11.23	12.00	1.194	0.01	0.163	0.195
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	21100	2535	11.33	12.00	1.167	-0.01	0.541	0.631
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	20850	2510	11.27	12.00	1.183	0.03	0.472	0.558
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	21350	2560	11.31	12.00	1.172	-0.13	0.535	0.627
	LTE Band 7 MIMO2	20M	QPSK	50	24	Bottom Face	0mm	ON	21100	2535	11.23	12.00	1.194	-0.01	0.521	0.622
	LTE Band 7 MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	21100	2535	11.33	12.00	1.167	0.05	0.100	0.117
	LTE Band 7 MIMO2	20M	QPSK	50	24	Edge 4	0mm	ON	21100	2535	11.23	12.00	1.194	0.05	0.095	0.113
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	21100	2535	22.80	24.00	1.318	-0.08	0.015	0.020
	LTE Band 7 MIMO2	20M	QPSK	50	0	Bottom of Laptop	15mm	OFF	21100	2535	22.10	23.00	1.230	0.01	0.009	0.011
	LTE Band 7 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	21100	2535	22.80	24.00	1.318	0.09	0.041	0.054
	LTE Band 7 MIMO2	20M	QPSK	50	0	Bottom Face	12mm	OFF	21100	2535	22.10	23.00	1.230	0.07	0.028	0.034
	LTE Band 7 MIMO2	20M	QPSK	1	0	Edge 1	0mm	OFF	21100	2535	22.80	24.00	1.318	-0.08	0.095	0.125
	LTE Band 7 MIMO2	20M	QPSK	50	0	Edge 1	0mm	OFF	21100	2535	22.10	23.00	1.230	-0.1	0.080	0.098
	LTE Band 7 MIMO2	20M	QPSK	1	0	Edge 4	9mm	OFF	21100	2535	22.80	24.00	1.318	-0.09	0.359	0.473
	LTE Band 7 MIMO2	20M	QPSK	50	0	Edge 4	9mm	OFF	21100	2535	22.10	23.00	1.230	0.08	0.343	0.422



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23095	707.5	17.17	18.50	1.358	0.15	0.269	0.365
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23095	707.5	16.27	17.50	1.327	0.14	0.219	0.291
	LTE Band 12	10M	QPSK	1	0	Bottom Face	0mm	ON	23095	707.5	17.17	18.50	1.358	-0.01	0.802	1.089
	LTE Band 12	10M	QPSK	25	0	Bottom Face	0mm	ON	23095	707.5	16.27	17.50	1.327	0.03	0.650	0.863
	LTE Band 12	10M	QPSK	50	0	Bottom Face	0mm	ON	23095	707.5	16.35	17.50	1.303	0.09	0.661	0.861
	LTE Band 12	10M	QPSK	1	0	Edge 1	0mm	ON	23095	707.5	17.17	18.50	1.358	0.09	0.250	0.340
	LTE Band 12	10M	QPSK	25	0	Edge 1	0mm	ON	23095	707.5	16.27	17.50	1.327	-0.12	0.200	0.265
	LTE Band 12	10M	QPSK	1	0	Edge 2	0mm	ON	23095	707.5	17.17	18.50	1.358	0.02	0.061	0.083
	LTE Band 12	10M	QPSK	25	0	Edge 2	0mm	ON	23095	707.5	16.27	17.50	1.327	0.01	0.050	0.066
	LTE Band 12	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	23095	707.5	23.81	24.50	1.172	-0.03	0.142	0.166
	LTE Band 12	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	23095	707.5	22.94	23.50	1.138	0.06	0.104	0.118
	LTE Band 12	10M	QPSK	1	0	Bottom Face	13mm	OFF	23095	707.5	23.81	24.50	1.172	0.05	0.171	0.200
	LTE Band 12	10M	QPSK	25	0	Bottom Face	13mm	OFF	23095	707.5	22.94	23.50	1.138	0.1	0.149	0.170
	LTE Band 12	10M	QPSK	1	0	Edge 1	22mm	OFF	23095	707.5	23.81	24.50	1.172	0.03	0.001	0.001
	LTE Band 12	10M	QPSK	25	0	Edge 1	22mm	OFF	23095	707.5	22.94	23.50	1.138	-0.08	0.001	0.001
	LTE Band 12	10M	QPSK	1	0	Edge 2	14mm	OFF	23095	707.5	23.81	24.50	1.172	0.08	0.001	0.001
	LTE Band 12	10M	QPSK	25	0	Edge 2	14mm	OFF	23095	707.5	22.94	23.50	1.138	-0.03	0.001	0.001
08	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23230	782	19.05	19.50	1.109	-0.12	0.669	0.742
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23230	782	18.18	18.50	1.076	0.02	0.547	0.589
	LTE Band 13	10M	QPSK	1	0	Bottom Face	0mm	ON	23230	782	19.05	19.50	1.109	0.02	1.050	1.165
	LTE Band 13	10M	QPSK	25	0	Bottom Face	0mm	ON	23230	782	18.18	18.50	1.076	0.06	0.860	0.926
	LTE Band 13	10M	QPSK	50	0	Bottom Face	0mm	ON	23230	782	18.05	18.50	1.109	0.05	0.836	0.927
	LTE Band 13	10M	QPSK	1	0	Edge 1	0mm	ON	23230	782	19.05	19.50	1.109	0.03	0.402	0.446
	LTE Band 13	10M	QPSK	25	0	Edge 1	0mm	ON	23230	782	18.18	18.50	1.076	-0.01	0.329	0.354
	LTE Band 13	10M	QPSK	1	0	Edge 2	0mm	ON	23230	782	19.05	19.50	1.109	-0.09	0.041	0.045
	LTE Band 13	10M	QPSK	25	0	Edge 2	0mm	ON	23230	782	18.18	18.50	1.076	0.03	0.034	0.037
	LTE Band 13	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	23230	782	23.66	24.50	1.213	-0.11	0.209	0.254
	LTE Band 13	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	23230	782	22.65	23.50	1.216	-0.08	0.158	0.192
	LTE Band 13	10M	QPSK	1	0	Bottom Face	13mm	OFF	23230	782	23.66	24.50	1.213	-0.14	0.322	0.391
	LTE Band 13	10M	QPSK	25	0	Bottom Face	13mm	OFF	23230	782	22.65	23.50	1.216	-0.08	0.281	0.342
	LTE Band 13	10M	QPSK	1	0	Edge 1	22mm	OFF	23230	782	23.66	24.50	1.213	-0.07	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Edge 1	22mm	OFF	23230	782	22.65	23.50	1.216	0.1	0.001	0.001
	LTE Band 13	10M	QPSK	1	0	Edge 2	14mm	OFF	23230	782	23.66	24.50	1.213	0.05	0.001	0.001
	LTE Band 13	10M	QPSK	25	0	Edge 2	14mm	OFF	23230	782	22.65	23.50	1.216	0	0.001	0.001
09	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	23330	793	20.16	20.50	1.081	-0.12	0.861	0.931
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	23330	793	19.17	19.50	1.079	0.05	0.686	0.740
	LTE Band 14	10M	QPSK	50	0	Bottom of Laptop	0mm	ON	23330	793	19.02	19.50	1.117	-0.06	0.656	0.733
	LTE Band 14	10M	QPSK	1	0	Bottom Face	0mm	ON	23330	793	20.16	20.50	1.081	-0.12	1.100	1.190
	LTE Band 14	10M	QPSK	25	0	Bottom Face	0mm	ON	23330	793	19.17	19.50	1.079	-0.12	0.875	0.944
	LTE Band 14	10M	QPSK	50	0	Bottom Face	0mm	ON	23330	793	19.02	19.50	1.117	0.02	0.842	0.940
	LTE Band 14	10M	QPSK	1	0	Edge 1	0mm	ON	23330	793	20.16	20.50	1.081	0.05	0.642	0.694
	LTE Band 14	10M	QPSK	25	0	Edge 1	0mm	ON	23330	793	19.17	19.50	1.079	0.03	0.512	0.552
	LTE Band 14	10M	QPSK	1	0	Edge 2	0mm	ON	23330	793	20.16	20.50	1.081	-0.09	0.050	0.054
	LTE Band 14	10M	QPSK	25	0	Edge 2	0mm	ON	23330	793	19.17	19.50	1.079	0.07	0.040	0.043
	LTE Band 14	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	23330	793	23.68	24.50	1.208	-0.06	0.214	0.258
	LTE Band 14	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	23330	793	22.66	23.50	1.213	0	0.157	0.191
	LTE Band 14	10M	QPSK	1	0	Bottom Face	13mm	OFF	23330	793	23.68	24.50	1.208	-0.03	0.360	0.435
	LTE Band 14	10M	QPSK	25	0	Bottom Face	13mm	OFF	23330	793	22.66	23.50	1.213	0.07	0.315	0.382
	LTE Band 14	10M	QPSK	1	0	Edge 1	22mm	OFF	23330	793	23.68	24.50	1.208	0.07	0.001	0.001
	LTE Band 14	10M	QPSK	25	0	Edge 1	22mm	OFF	23330	793	22.66	23.50	1.213	-0.03	0.001	0.001
	LTE Band 14	10M	QPSK	1	0	Edge 2	14mm	OFF	23330	793	23.68	24.50	1.208	0.04	0.001	0.001
	LTE Band 14	10M	QPSK	25	0	Edge 2	14mm	OFF	23330	793	22.66	23.50	1.213	-0.05	0.001	0.001



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	26140	1860	15.56	16.50	1.242	0.08	0.743	0.923
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	26340	1880	15.46	16.50	1.271	-0.08	0.788	1.001
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	26590	1905	15.46	16.50	1.271	-0.04	0.812	1.032
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	26140	1860	14.71	15.50	1.199	-0.09	0.611	0.733
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	26340	1880	14.65	15.50	1.216	-0.02	0.654	0.795
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	26590	1905	14.62	15.50	1.225	0.05	0.670	0.820
	LTE Band 25	20M	QPSK	100	0	Bottom of Laptop	0mm	ON	26140	1860	14.70	15.50	1.202	0.02	0.666	0.801
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	ON	26140	1860	15.56	16.50	1.242	-0.09	0.847	1.052
10	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	ON	26340	1880	15.46	16.50	1.271	0.14	0.885	1.124
	LTE Band 25	20M	QPSK	1	0	Bottom Face	0mm	ON	26590	1905	15.46	16.50	1.271	0	0.812	1.032
	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	ON	26140	1860	14.71	15.50	1.199	0	0.695	0.834
	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	ON	26340	1880	14.65	15.50	1.216	-0.09	0.735	0.894
	LTE Band 25	20M	QPSK	50	0	Bottom Face	0mm	ON	26590	1905	14.62	15.50	1.225	-0.01	0.670	0.820
	LTE Band 25	20M	QPSK	100	0	Bottom Face	0mm	ON	26140	1860	14.70	15.50	1.202	0.1	0.691	0.831
	LTE Band 25	20M	QPSK	1	0	Edge 1	0mm	ON	26140	1860	15.56	16.50	1.242	0.01	0.091	0.113
	LTE Band 25	20M	QPSK	50	0	Edge 1	0mm	ON	26140	1860	14.71	15.50	1.199	0.04	0.075	0.090
	LTE Band 25	20M	QPSK	1	0	Edge 2	0mm	ON	26140	1860	15.56	16.50	1.242	0	0.307	0.381
	LTE Band 25	20M	QPSK	50	0	Edge 2	0mm	ON	26140	1860	14.71	15.50	1.199	0.01	0.251	0.301
	LTE Band 25	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	26590	1905	23.67	24.00	1.079	0.02	0.338	0.365
	LTE Band 25	20M	QPSK	50	0	Bottom of Laptop	16mm	OFF	26590	1905	22.73	23.00	1.064	0.1	0.251	0.267
	LTE Band 25	20M	QPSK	1	0	Bottom Face	13mm	OFF	26590	1905	23.67	24.00	1.079	-0.06	0.313	0.338
	LTE Band 25	20M	QPSK	50	0	Bottom Face	13mm	OFF	26590	1905	22.73	23.00	1.064	0.09	0.233	0.248
	LTE Band 25	20M	QPSK	1	0	Edge 1	22mm	OFF	26590	1905	23.67	24.00	1.079	-0.06	0.001	0.001
	LTE Band 25	20M	QPSK	50	0	Edge 1	22mm	OFF	26590	1905	22.73	23.00	1.064	0.01	0.001	0.001
	LTE Band 25	20M	QPSK	1	0	Edge 2	14mm	OFF	26590	1905	23.67	24.00	1.079	-0.05	0.097	0.104
	LTE Band 25	20M	QPSK	50	0	Edge 2	14mm	OFF	26590	1905	22.73	23.00	1.064	0.05	0.083	0.088
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	0mm	ON	26865	831.5	20.24	20.50	1.062	-0.04	0.915	0.971
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	0mm	ON	26865	831.5	19.47	19.50	1.007	0.06	0.766	0.771
	LTE Band 26	15M	QPSK	75	0	Bottom of Laptop	0mm	ON	26865	831.5	19.37	19.50	1.030	0.06	0.734	0.756
11	LTE Band 26	15M	QPSK	1	0	Bottom Face	0mm	ON	26865	831.5	20.24	20.50	1.062	-0.13	1.100	1.168
	LTE Band 26	15M	QPSK	36	0	Bottom Face	0mm	ON	26865	831.5	19.47	19.50	1.007	0.09	0.923	0.929
	LTE Band 26	15M	QPSK	75	0	Bottom Face	0mm	ON	26865	831.5	19.37	19.50	1.030	0.05	0.898	0.925
	LTE Band 26	15M	QPSK	1	0	Edge 1	0mm	ON	26865	831.5	20.24	20.50	1.062	0.08	0.593	0.630
	LTE Band 26	15M	QPSK	36	0	Edge 1	0mm	ON	26865	831.5	19.47	19.50	1.007	-0.12	0.498	0.501
	LTE Band 26	15M	QPSK	1	0	Edge 2	0mm	ON	26865	831.5	20.24	20.50	1.062	0.03	0.037	0.039
	LTE Band 26	15M	QPSK	36	0	Edge 2	0mm	ON	26865	831.5	19.47	19.50	1.007	0.07	0.030	0.030
	LTE Band 26	15M	QPSK	1	0	Bottom of Laptop	16mm	OFF	26865	831.5	23.87	24.50	1.156	0.03	0.220	0.254
	LTE Band 26	15M	QPSK	36	0	Bottom of Laptop	16mm	OFF	26865	831.5	22.89	23.50	1.151	-0.08	0.163	0.188
	LTE Band 26	15M	QPSK	1	0	Bottom Face	13mm	OFF	26865	831.5	23.87	24.50	1.156	-0.03	0.448	0.518
	LTE Band 26	15M	QPSK	36	0	Bottom Face	13mm	OFF	26865	831.5	22.89	23.50	1.151	-0.1	0.391	0.450
	LTE Band 26	15M	QPSK	1	0	Edge 1	22mm	OFF	26865	831.5	23.87	24.50	1.156	0.08	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Edge 1	22mm	OFF	26865	831.5	22.89	23.50	1.151	-0.03	0.001	0.001
	LTE Band 26	15M	QPSK	1	0	Edge 2	14mm	OFF	26865	831.5	23.87	24.50	1.156	0.03	0.001	0.001
	LTE Band 26	15M	QPSK	36	0	Edge 2	14mm	OFF	26865	831.5	22.89	23.50	1.151	-0.03	0.001	0.001
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	0mm	ON	27710	2310	13.13	14.50	1.371	0.15	0.497	0.681
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	0mm	ON	27710	2310	12.10	13.50	1.380	0.03	0.430	0.594
12	LTE Band 30	10M	QPSK	1	0	Bottom Face	0mm	ON	27710	2310	13.13	14.50	1.371	-0.04	0.845	1.158
	LTE Band 30	10M	QPSK	25	0	Bottom Face	0mm	ON	27710	2310	12.10	13.50	1.380	0.01	0.731	1.009
	LTE Band 30	10M	QPSK	50	0	Bottom Face	0mm	ON	27710	2310	12.12	13.50	1.374	0	0.738	1.014
	LTE Band 30	10M	QPSK	1	0	Edge 1	0mm	ON	27710	2310	13.13	14.50	1.371	0.1	0.433	0.594
	LTE Band 30	10M	QPSK	25	0	Edge 1	0mm	ON	27710	2310	12.10	13.50	1.380	-0.09	0.365	0.504
	LTE Band 30	10M	QPSK	1	0	Edge 2	0mm	ON	27710	2310	13.13	14.50	1.371	-0.1	0.030	0.041
	LTE Band 30	10M	QPSK	25	0	Edge 2	0mm	ON	27710	2310	12.10	13.50	1.380	0.06	0.028	0.039
	LTE Band 30	10M	QPSK	1	0	Bottom of Laptop	16mm	OFF	27710	2310	22.15	23.00	1.216	-0.03	0.359	0.437
	LTE Band 30	10M	QPSK	25	0	Bottom of Laptop	16mm	OFF	27710	2310	21.24	22.00	1.191	0.06	0.288	0.343
	LTE Band 30	10M	QPSK	1	0	Bottom Face	13mm	OFF	27710	2310	22.15	23.00	1.216	0.09	0.576	0.701
	LTE Band 30	10M	QPSK	25	0	Bottom Face	13mm	OFF	27710	2310	21.24	22.00	1.191	-0.05	0.484	0.577
	LTE Band 30	10M	QPSK	1	0	Edge 1	22mm	OFF	27710	2310	22.15	23.00	1.216	0.04	0.001	0.001
	LTE Band 30	10M	QPSK	25	0	Edge 1	22mm	OFF	27710	2310	21.24	22.00	1.191	0.07	0.001	0.001
	LTE Band 30	10M	QPSK	1	0	Edge 2	14mm	OFF	27710	2310	22.15	23.00	1.216	0.1	0.074	0.090
	LTE Band 30	10M	QPSK	25	0	Edge 2	14mm	OFF	27710	2310	21.24	22.00	1.191	0.05	0.061	0.073



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132572	1770	16.61	17.00	1.094	0.05	0.920	1.006
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132072	1720	16.46	17.00	1.132	0	0.988	1.119
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132322	1745	16.42	17.00	1.143	0.09	0.955	1.091
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	132572	1770	15.65	16.00	1.084	0.06	0.737	0.799
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	132072	1720	15.62	16.00	1.091	-0.01	0.815	0.890
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	132322	1745	15.57	16.00	1.104	0.03	0.785	0.867
	LTE Band 66	20M	QPSK	100	0	Bottom of Laptop	0mm	ON	132572	1770	15.60	16.00	1.096	-0.02	0.766	0.840
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	16.61	17.00	1.094	0.05	0.980	1.072
13	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	16.46	17.00	1.132	-0.02	1.000	1.132
	LTE Band 66	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	16.42	17.00	1.143	-0.13	0.915	1.046
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	ON	132572	1770	15.65	16.00	1.084	-0.11	0.786	0.852
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	ON	132072	1720	15.62	16.00	1.091	0.15	0.824	0.899
	LTE Band 66	20M	QPSK	50	0	Bottom Face	0mm	ON	132322	1745	15.57	16.00	1.104	-0.01	0.753	0.831
	LTE Band 66	20M	QPSK	100	0	Bottom Face	0mm	ON	132572	1770	15.60	16.00	1.096	-0.02	0.746	0.818
	LTE Band 66	20M	QPSK	1	0	Edge 1	0mm	ON	132572	1770	16.61	17.00	1.094	-0.03	0.199	0.218
	LTE Band 66	20M	QPSK	50	0	Edge 1	0mm	ON	132572	1770	15.65	16.00	1.084	0.06	0.160	0.173
	LTE Band 66	20M	QPSK	1	0	Edge 2	0mm	ON	132572	1770	16.61	17.00	1.094	-0.13	0.620	0.678
	LTE Band 66	20M	QPSK	50	0	Edge 2	0mm	ON	132572	1770	15.65	16.00	1.084	0.07	0.497	0.539
	LTE Band 66	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	132572	1770	23.57	24.00	1.104	-0.02	0.372	0.411
	LTE Band 66	20M	QPSK	50	0	Bottom of Laptop	16mm	OFF	132572	1770	22.65	23.00	1.084	-0.05	0.280	0.303
	LTE Band 66	20M	QPSK	1	0	Bottom Face	13mm	OFF	132572	1770	23.57	24.00	1.104	-0.02	0.359	0.396
	LTE Band 66	20M	QPSK	50	0	Bottom Face	13mm	OFF	132572	1770	22.65	23.00	1.084	0.07	0.302	0.327
	LTE Band 66	20M	QPSK	1	0	Edge 1	22mm	OFF	132572	1770	23.57	24.00	1.104	-0.1	0.001	0.001
	LTE Band 66	20M	QPSK	50	0	Edge 1	22mm	OFF	132572	1770	22.65	23.00	1.084	0.02	0.001	0.001
	LTE Band 66	20M	QPSK	1	0	Edge 2	14mm	OFF	132572	1770	23.57	24.00	1.104	-0.02	0.156	0.172
	LTE Band 66	20M	QPSK	50	0	Edge 2	14mm	OFF	132572	1770	22.65	23.00	1.084	0.05	0.138	0.150
	LTE Band 66B	15M	QPSK	1	0	Bottom Face	0mm	ON	130247	1717.5	16.85	17.00	1.035	-0.05	1.080	1.118
	LTE Band 66C	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	16.92	17.00	1.019	-0.04	1.100	1.120
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	132572	1770	11.19	11.50	1.074	0.17	0.398	0.427
	LTE Band 66 MIMO2	20M	QPSK	50	50	Bottom of Laptop	0mm	ON	132572	1770	11.10	11.50	1.096	0.11	0.385	0.422
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132572	1770	11.19	11.50	1.074	0.19	0.632	0.679
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132072	1720	11.12	11.50	1.091	0.01	0.546	0.596
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	132322	1745	11.14	11.50	1.086	0.13	0.616	0.669
	LTE Band 66 MIMO2	20M	QPSK	50	50	Bottom Face	0mm	ON	132572	1770	11.10	11.50	1.096	-0.05	0.615	0.674
	LTE Band 66 MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	132572	1770	11.19	11.50	1.074	0.07	0.425	0.456
	LTE Band 66 MIMO2	20M	QPSK	50	50	Edge 4	0mm	ON	132572	1770	11.10	11.50	1.096	-0.05	0.403	0.442
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	132572	1770	22.68	24.00	1.355	-0.04	0.642	0.870
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	132072	1720	22.60	24.00	1.380	0.06	0.624	0.861
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	132322	1745	22.61	24.00	1.377	-0.12	0.612	0.843
	LTE Band 66 MIMO2	20M	QPSK	50	0	Bottom of Laptop	15mm	OFF	132572	1770	22.06	23.00	1.242	0.06	0.557	0.692
	LTE Band 66 MIMO2	20M	QPSK	100	0	Bottom of Laptop	15mm	OFF	132572	1770	21.98	23.00	1.265	0.04	0.548	0.693
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	132572	1770	22.68	24.00	1.355	-0.12	0.643	0.871
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	132072	1720	22.60	24.00	1.380	0.08	0.620	0.856
	LTE Band 66 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	132322	1745	22.61	24.00	1.377	-0.17	0.605	0.833
	LTE Band 66 MIMO2	20M	QPSK	50	0	Bottom Face	12mm	OFF	132572	1770	22.06	23.00	1.242	0	0.558	0.693
	LTE Band 66 MIMO2	20M	QPSK	100	0	Bottom Face	12mm	OFF	132572	1770	21.98	23.00	1.265	0.02	0.543	0.687
	LTE Band 66 MIMO2	20M	QPSK	1	0	Edge 1	0mm	OFF	132572	1770	22.68	24.00	1.355	-0.07	0.111	0.150
	LTE Band 66 MIMO2	20M	QPSK	50	0	Edge 1	0mm	OFF	132572	1770	22.06	23.00	1.242	0	0.089	0.111
	LTE Band 66 MIMO2	20M	QPSK	1	0	Edge 4	9mm	OFF	132572	1770	22.68	24.00	1.355	-0.06	0.433	0.587
	LTE Band 66 MIMO2	20M	QPSK	50	0	Edge 4	9mm	OFF	132572	1770	22.06	23.00	1.242	-0.01	0.395	0.490



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	133322	683	18.28	18.50	1.052	-0.01	0.388	0.408
	LTE Band 71	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	133322	683	17.39	17.50	1.026	0.04	0.316	0.324
14	LTE Band 71	20M	QPSK	1	0	Bottom Face	0mm	ON	133322	683	18.28	18.50	1.052	-0.04	1.080	1.136
	LTE Band 71	20M	QPSK	50	0	Bottom Face	0mm	ON	133322	683	17.39	17.50	1.026	0.04	0.880	0.903
	LTE Band 71	20M	QPSK	100	0	Bottom Face	0mm	ON	133322	683	17.26	17.50	1.057	0.06	0.854	0.903
	LTE Band 71	20M	QPSK	1	0	Edge 1	0mm	ON	133322	683	18.28	18.50	1.052	0.08	0.759	0.798
	LTE Band 71	20M	QPSK	50	0	Edge 1	0mm	ON	133322	683	17.39	17.50	1.026	-0.03	0.620	0.636
	LTE Band 71	20M	QPSK	1	0	Edge 2	0mm	ON	133322	683	18.28	18.50	1.052	0.07	0.242	0.255
	LTE Band 71	20M	QPSK	50	0	Edge 2	0mm	ON	133322	683	17.39	17.50	1.026	0.09	0.195	0.200
	LTE Band 71	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	133322	683	24.03	24.50	1.114	-0.01	0.157	0.175
	LTE Band 71	20M	QPSK	50	0	Bottom of Laptop	16mm	OFF	133322	683	23.08	23.50	1.102	-0.1	0.133	0.147
	LTE Band 71	20M	QPSK	1	0	Bottom Face	13mm	OFF	133322	683	24.03	24.50	1.114	-0.09	0.193	0.215
	LTE Band 71	20M	QPSK	50	0	Bottom Face	13mm	OFF	133322	683	23.08	23.50	1.102	-0.07	0.166	0.183
	LTE Band 71	20M	QPSK	1	0	Edge 1	22mm	OFF	133322	683	24.03	24.50	1.114	-0.1	0.001	0.001
	LTE Band 71	20M	QPSK	50	0	Edge 1	22mm	OFF	133322	683	23.08	23.50	1.102	0.06	0.001	0.001
	LTE Band 71	20M	QPSK	1	0	Edge 2	14mm	OFF	133322	683	24.03	24.50	1.114	0.08	0.056	0.062
	LTE Band 71	20M	QPSK	50	0	Edge 2	14mm	OFF	133322	683	23.08	23.50	1.102	0.04	0.046	0.051

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	40620	2593	13.32	13.50	1.042	62.9	1.006	-0.07	0.294	0.308
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	40620	2593	12.37	12.50	1.030	62.9	1.006	0.1	0.212	0.220
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	13.32	13.50	1.042	62.9	1.006	0.04	0.766	0.803
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	13.28	13.50	1.052	62.9	1.006	-0.04	0.700	0.741
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	40185	2549.5	13.23	13.50	1.064	62.9	1.006	0.03	0.667	0.714
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	41055	2636.5	13.28	13.50	1.052	62.9	1.006	-0.03	0.808	0.855
	LTE Band 41	20M	QPSK	1	0	Bottom Face	0mm	ON	41490	2680	13.12	13.50	1.091	62.9	1.006	-0.11	0.833	0.915
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	ON	40620	2593	12.37	12.50	1.030	62.9	1.006	-0.09	0.616	0.639
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	ON	39750	2506	12.33	12.50	1.040	62.9	1.006	-0.06	0.562	0.588
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	ON	40185	2549.5	12.30	12.50	1.047	62.9	1.006	-0.08	0.538	0.567
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	ON	41055	2636.5	12.36	12.50	1.033	62.9	1.006	-0.09	0.655	0.681
	LTE Band 41	20M	QPSK	50	0	Bottom Face	0mm	ON	41490	2680	12.26	12.50	1.057	62.9	1.006	-0.08	0.684	0.727
	LTE Band 41	20M	QPSK	100	0	Bottom Face	0mm	ON	40620	2593	12.39	12.50	1.026	62.9	1.006	-0.07	0.558	0.576
	LTE Band 41	20M	QPSK	1	0	Edge 1	0mm	ON	40620	2593	13.32	13.50	1.042	62.9	1.006	-0.04	0.067	0.070
	LTE Band 41	20M	QPSK	50	0	Edge 1	0mm	ON	40620	2593	12.37	12.50	1.030	62.9	1.006	0.02	0.048	0.050
	LTE Band 41	20M	QPSK	1	0	Edge 2	0mm	ON	40620	2593	13.32	13.50	1.042	62.9	1.006	0.03	0.117	0.123
	LTE Band 41	20M	QPSK	50	0	Edge 2	0mm	ON	40620	2593	12.37	12.50	1.030	62.9	1.006	-0.03	0.098	0.102
	LTE Band 41	20M	QPSK	1	0	Bottom of Laptop	16mm	OFF	40620	2593	23.90	24.00	1.023	62.9	1.006	-0.03	0.215	0.221
	LTE Band 41	20M	QPSK	50	0	Bottom of Laptop	16mm	OFF	40620	2593	22.99	23.00	1.002	62.9	1.006	-0.07	0.161	0.162
	LTE Band 41	20M	QPSK	1	0	Bottom Face	13mm	OFF	40620	2593	23.90	24.00	1.023	62.9	1.006	0.02	0.366	0.377
	LTE Band 41	20M	QPSK	50	0	Bottom Face	13mm	OFF	40620	2593	22.99	23.00	1.002	62.9	1.006	-0.09	0.309	0.312
	LTE Band 41	20M	QPSK	1	0	Edge 1	22mm	OFF	40620	2593	23.90	24.00	1.023	62.9	1.006	0.1	0.001	0.001
	LTE Band 41	20M	QPSK	50	0	Edge 1	22mm	OFF	40620	2593	22.99	23.00	1.002	62.9	1.006	-0.05	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	Edge 2	14mm	OFF	40620	2593	23.90	24.00	1.023	62.9	1.006	0.01	0.061	0.063
	LTE Band 41	20M	QPSK	50	0	Edge 2	14mm	OFF	40620	2593	22.99	23.00	1.002	62.9	1.006	0.03	0.050	0.050
	LTE Band 41C	20M	QPSK	1	0	Bottom Face	0mm	ON	39750	2506	13.46	13.50	1.009	62.9	1.006	0.12	0.856	0.869
15	LTE Band 41_HPUE	20M	QPSK	1	0	Bottom Face	0mm	ON	40620	2593	16.12	16.50	1.091	42.9	1.009	-0.02	1.030	1.134



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom of Laptop	0mm	ON	55830	3609	12.65	13.00	1.084	62.9	1.006	0.05	0.413	0.450
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom of Laptop	0mm	ON	55830	3609	11.71	12.00	1.069	62.9	1.006	-0.05	0.350	0.376
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	55830	3609	12.65	13.00	1.084	62.9	1.006	-0.09	0.777	0.847
16	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	55340	3560	12.64	13.00	1.086	62.9	1.006	-0.05	1.080	1.180
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	56150	3641	12.40	13.00	1.148	62.9	1.006	0.03	0.969	1.119
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	56640	3690	12.38	13.00	1.153	62.9	1.006	-0.11	0.875	1.015
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	55830	3609	11.71	12.00	1.069	62.9	1.006	0.03	0.761	0.818
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	55340	3560	11.69	12.00	1.074	62.9	1.006	-0.14	0.956	1.033
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	56150	3641	11.47	12.00	1.130	62.9	1.006	0.06	0.932	1.059
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom Face	0mm	ON	56640	3690	11.47	12.00	1.130	62.9	1.006	-0.11	0.867	0.985
	LTE Band 48 MIMO2	20M	QPSK	100	0	Bottom Face	0mm	ON	55830	3609	11.70	12.00	1.072	62.9	1.006	0.07	0.761	0.820
	LTE Band 48 MIMO2	20M	QPSK	1	0	Edge 4	0mm	ON	55830	3609	12.65	13.00	1.084	62.9	1.006	-0.17	0.551	0.601
	LTE Band 48 MIMO2	20M	QPSK	50	0	Edge 4	0mm	ON	55830	3609	11.71	12.00	1.069	62.9	1.006	-0.03	0.436	0.469
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom of Laptop	15mm	OFF	55340	3560	21.01	22.00	1.256	62.9	1.006	0.03	0.170	0.215
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom of Laptop	15mm	OFF	55340	3560	20.07	21.00	1.239	62.9	1.006	0.08	0.129	0.161
	LTE Band 48 MIMO2	20M	QPSK	1	0	Bottom Face	12mm	OFF	55340	3560	21.01	22.00	1.256	62.9	1.006	0.05	0.499	0.631
	LTE Band 48 MIMO2	20M	QPSK	50	0	Bottom Face	12mm	OFF	55340	3560	20.07	21.00	1.239	62.9	1.006	0.01	0.400	0.498
	LTE Band 48 MIMO2	20M	QPSK	1	0	Edge 1	0mm	OFF	55340	3560	21.01	22.00	1.256	62.9	1.006	-0.01	0.066	0.083
	LTE Band 48 MIMO2	20M	QPSK	50	0	Edge 1	0mm	OFF	55340	3560	20.07	21.00	1.239	62.9	1.006	-0.07	0.045	0.056
	LTE Band 48 MIMO2	20M	QPSK	1	0	Edge 4	9mm	OFF	55340	3560	21.01	22.00	1.256	62.9	1.006	0.02	0.278	0.351
	LTE Band 48 MIMO2	20M	QPSK	50	0	Edge 4	9mm	OFF	55340	3560	20.07	21.00	1.239	62.9	1.006	0.04	0.217	0.270
	LTE Band 48C MIMO2	20M	QPSK	1	0	Bottom Face	0mm	ON	55340	3560	12.96	13.00	1.009	62.9	1.006	-0.04	1.060	1.076



FCC SAR TEST REPORT

Report No. : FA092423

<5G NR SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n2	20M	BPSK	1	53	Bottom of Laptop	0mm	ON	376000	1880	12.77	13.50	1.183	0.18	0.472	0.558
	FR1 n2	20M	BPSK	50	56	Bottom of Laptop	0mm	ON	376000	1880	12.55	13.50	1.245	0.11	0.441	0.549
	FR1 n2	20M	BPSK	1	53	Bottom Face	0mm	ON	376000	1880	12.77	13.50	1.183	0.07	0.559	0.661
	FR1 n2	20M	BPSK	1	53	Bottom Face	0mm	ON	372000	1860	12.75	13.50	1.189	-0.11	0.587	0.698
	FR1 n2	20M	BPSK	1	53	Bottom Face	0mm	ON	380000	1900	12.69	13.50	1.205	0.14	0.551	0.664
	FR1 n2	20M	BPSK	50	56	Bottom Face	0mm	ON	376000	1880	12.55	13.50	1.245	-0.13	0.524	0.652
	FR1 n2	20M	BPSK	1	53	Edge 1	0mm	ON	376000	1880	12.77	13.50	1.183	0.07	0.057	0.067
	FR1 n2	20M	BPSK	50	56	Edge 1	0mm	ON	376000	1880	12.55	13.50	1.245	-0.18	0.034	0.042
	FR1 n2	20M	BPSK	1	53	Edge 2	0mm	ON	376000	1880	12.77	13.50	1.183	-0.03	0.184	0.218
	FR1 n2	20M	BPSK	50	56	Edge 2	0mm	ON	376000	1880	12.55	13.50	1.245	0.06	0.173	0.215
	FR1 n2	20M	BPSK	1	1	Bottom of Laptop	16mm	OFF	376000	1880	23.20	24.00	1.202	-0.12	0.270	0.325
	FR1 n2	20M	BPSK	50	28	Bottom of Laptop	16mm	OFF	376000	1880	22.99	24.00	1.262	0.08	0.244	0.308
	FR1 n2	20M	BPSK	1	1	Bottom Face	13mm	OFF	376000	1880	23.20	24.00	1.202	-0.09	0.305	0.367
	FR1 n2	20M	BPSK	50	28	Bottom Face	13mm	OFF	376000	1880	22.99	24.00	1.262	-0.01	0.280	0.353
	FR1 n2	20M	BPSK	1	1	Edge 1	22mm	OFF	376000	1880	23.20	24.00	1.202	-0.01	0.058	0.070
	FR1 n2	20M	BPSK	50	28	Edge 1	22mm	OFF	376000	1880	22.99	24.00	1.262	-0.04	0.064	0.081
	FR1 n2	20M	BPSK	1	1	Edge 2	14mm	OFF	376000	1880	23.20	24.00	1.202	0.08	0.124	0.149
	FR1 n2	20M	BPSK	50	28	Edge 2	14mm	OFF	376000	1880	22.99	24.00	1.262	-0.08	0.113	0.143
	FR1 n2 MIMO2	20M	BPSK	1	53	Bottom of Laptop	0mm	ON	372000	1860	11.84	12.50	1.164	0.16	0.318	0.370
	FR1 n2 MIMO2	20M	BPSK	50	56	Bottom of Laptop	0mm	ON	372000	1860	11.40	12.50	1.288	0.12	0.285	0.367
	FR1 n2 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	372000	1860	11.84	12.50	1.164	-0.02	0.589	0.686
	FR1 n2 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	376000	1880	11.79	12.50	1.178	0.05	0.582	0.685
	FR1 n2 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	380000	1900	11.70	12.50	1.202	0.06	0.564	0.678
	FR1 n2 MIMO2	20M	BPSK	50	56	Bottom Face	0mm	ON	372000	1860	11.40	12.50	1.288	-0.04	0.512	0.660
	FR1 n2 MIMO2	20M	BPSK	1	53	Edge 4	0mm	ON	372000	1860	11.84	12.50	1.164	-0.01	0.233	0.271
	FR1 n2 MIMO2	20M	BPSK	50	56	Edge 4	0mm	ON	372000	1860	11.40	12.50	1.288	-0.11	0.182	0.234
	FR1 n2 MIMO2	20M	BPSK	1	1	Bottom of Laptop	15mm	OFF	376000	1880	23.73	24.00	1.064	-0.08	0.672	0.715
	FR1 n2 MIMO2	20M	BPSK	50	28	Bottom of Laptop	15mm	OFF	376000	1880	23.62	24.00	1.091	0.02	0.661	0.721
17	FR1 n2 MIMO2	20M	BPSK	1	1	Bottom Face	12mm	OFF	376000	1880	23.73	24.00	1.064	-0.12	0.913	0.972
	FR1 n2 MIMO2	20M	BPSK	1	1	Bottom Face	12mm	OFF	372000	1860	23.64	24.00	1.086	0.05	0.890	0.967
	FR1 n2 MIMO2	20M	BPSK	1	1	Bottom Face	12mm	OFF	380000	1900	23.58	24.00	1.102	-0.01	0.872	0.961
	FR1 n2 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	376000	1880	23.62	24.00	1.091	0.08	0.876	0.956
	FR1 n2 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	372000	1860	23.59	24.00	1.099	-0.09	0.851	0.935
	FR1 n2 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	380000	1900	23.61	24.00	1.094	-0.01	0.832	0.910
	FR1 n2 MIMO2	20M	BPSK	100	0	Bottom Face	12mm	OFF	376000	1880	23.11	24.00	1.227	-0.15	0.753	0.924
	FR1 n2 MIMO2	20M	BPSK	1	1	Edge 1	0mm	OFF	376000	1880	23.73	24.00	1.064	0.04	0.213	0.227
	FR1 n2 MIMO2	20M	BPSK	50	28	Edge 1	0mm	OFF	376000	1880	23.62	24.00	1.091	0.02	0.186	0.203
	FR1 n2 MIMO2	20M	BPSK	1	1	Edge 4	9mm	OFF	376000	1880	23.73	24.00	1.064	-0.05	0.666	0.709
	FR1 n2 MIMO2	20M	BPSK	50	28	Edge 4	9mm	OFF	376000	1880	23.62	24.00	1.091	0.08	0.618	0.675
	FR1 n5	20M	BPSK	1	1	Bottom of Laptop	0mm	ON	167300	836.5	14.75	15.50	1.189	0.02	0.272	0.323
	FR1 n5	20M	BPSK	50	0	Bottom of Laptop	0mm	ON	167300	836.5	14.57	15.50	1.239	0.08	0.259	0.321
18	FR1 n5	20M	BPSK	1	1	Bottom Face	0mm	ON	167300	836.5	14.75	15.50	1.189	-0.02	0.578	0.687
	FR1 n5	20M	BPSK	50	0	Bottom Face	0mm	ON	167300	836.5	14.57	15.50	1.239	0.01	0.541	0.670
	FR1 n5	20M	BPSK	1	1	Edge 1	0mm	ON	167300	836.5	14.75	15.50	1.189	-0.14	0.335	0.398
	FR1 n5	20M	BPSK	50	0	Edge 1	0mm	ON	167300	836.5	14.57	15.50	1.239	0.16	0.314	0.389
	FR1 n5	20M	BPSK	1	1	Edge 2	0mm	ON	167300	836.5	14.75	15.50	1.189	0.08	0.118	0.140
	FR1 n5	20M	BPSK	50	0	Edge 2	0mm	ON	167300	836.5	14.57	15.50	1.239	-0.19	0.109	0.135
	FR1 n5	20M	BPSK	1	1	Bottom of Laptop	16mm	OFF	167300	836.5	23.58	24.00	1.102	0	0.207	0.228
	FR1 n5	20M	BPSK	50	28	Bottom of Laptop	16mm	OFF	167300	836.5	23.28	24.00	1.180	0.05	0.184	0.217
	FR1 n5	20M	BPSK	1	1	Bottom Face	13mm	OFF	167300	836.5	23.58	24.00	1.102	0.04	0.414	0.456
	FR1 n5	20M	BPSK	50	28	Bottom Face	13mm	OFF	167300	836.5	23.28	24.00	1.180	0.03	0.391	0.462
	FR1 n5	20M	BPSK	1	1	Edge 1	22mm	OFF	167300	836.5	23.58	24.00	1.102	0.07	0.001	0.001
	FR1 n5	20M	BPSK	50	28	Edge 1	22mm	OFF	167300	836.5	23.28	24.00	1.180	0.02	0.001	0.001
	FR1 n5	20M	BPSK	1	1	Edge 2	14mm	OFF	167300	836.5	23.58	24.00	1.102	0.09	0.105	0.116
	FR1 n5	20M	BPSK	50	28	Edge 2	14mm	OFF	167300	836.5	23.28	24.00	1.180	0.09	0.090	0.106



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom of Laptop	0mm	ON	507000	2535	9.84	10.00	1.038	-0.07	0.203	0.211
	FR1 n7 MIMO2	20M	BPSK	50	56	Bottom of Laptop	0mm	ON	507000	2535	9.36	10.00	1.159	0.01	0.175	0.203
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	507000	2535	9.84	10.00	1.038	-0.09	0.531	0.551
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	502000	2510	9.69	10.00	1.074	0.02	0.563	0.605
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	512000	2560	9.67	10.00	1.079	-0.05	0.648	0.699
	FR1 n7 MIMO2	20M	BPSK	50	56	Bottom Face	0mm	ON	507000	2535	9.36	10.00	1.159	0.06	0.524	0.607
	FR1 n7 MIMO2	20M	BPSK	1	53	Edge 4	0mm	ON	507000	2535	9.84	10.00	1.038	0.12	0.131	0.136
	FR1 n7 MIMO2	20M	BPSK	50	56	Edge 4	0mm	ON	507000	2535	9.36	10.00	1.159	-0.05	0.095	0.110
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom of Laptop	15mm	OFF	502000	2510	23.76	24.00	1.057	0.11	0.333	0.352
	FR1 n7 MIMO2	20M	BPSK	50	28	Bottom of Laptop	15mm	OFF	502000	2510	23.67	24.00	1.079	0.02	0.315	0.340
19	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	502000	2510	23.76	24.00	1.057	-0.05	0.776	0.820
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	507000	2535	23.04	24.00	1.247	-0.1	0.653	0.815
	FR1 n7 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	512000	2560	23.57	24.00	1.104	0.02	0.723	0.798
	FR1 n7 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	502000	2510	23.67	24.00	1.079	-0.01	0.735	0.793
	FR1 n7 MIMO2	20M	BPSK	100	0	Bottom Face	12mm	OFF	502000	2510	23.24	23.50	1.062	-0.01	0.749	0.795
	FR1 n7 MIMO2	20M	BPSK	1	53	Edge 1	0mm	OFF	502000	2510	23.76	24.00	1.057	-0.09	0.123	0.130
	FR1 n7 MIMO2	20M	BPSK	50	28	Edge 1	0mm	OFF	502000	2510	23.67	24.00	1.079	0.03	0.100	0.108
	FR1 n7 MIMO2	20M	BPSK	1	53	Edge 4	9mm	OFF	502000	2510	23.76	24.00	1.057	-0.08	0.490	0.518
	FR1 n7 MIMO2	20M	BPSK	50	28	Edge 4	9mm	OFF	502000	2510	23.67	24.00	1.079	0.01	0.430	0.464
	FR1 n12	15M	BPSK	1	1	Bottom of Laptop	0mm	ON	141500	707.5	14.41	15.50	1.285	0.05	0.160	0.206
	FR1 n12	15M	BPSK	36	0	Bottom of Laptop	0mm	ON	141500	707.5	14.11	15.50	1.377	0.17	0.145	0.200
20	FR1 n12	15M	BPSK	1	1	Bottom Face	0mm	ON	141500	707.5	14.41	15.50	1.285	-0.07	0.481	0.618
	FR1 n12	15M	BPSK	36	0	Bottom Face	0mm	ON	141500	707.5	14.11	15.50	1.377	0.01	0.442	0.609
	FR1 n12	15M	BPSK	1	1	Edge 1	0mm	ON	141500	707.5	14.41	15.50	1.285	-0.13	0.168	0.216
	FR1 n12	15M	BPSK	36	0	Edge 1	0mm	ON	141500	707.5	14.11	15.50	1.377	-0.05	0.155	0.213
	FR1 n12	15M	BPSK	1	1	Edge 2	0mm	ON	141500	707.5	14.41	15.50	1.285	0.17	0.034	0.044
	FR1 n12	15M	BPSK	36	0	Edge 2	0mm	ON	141500	707.5	14.11	15.50	1.377	0.06	0.021	0.029
	FR1 n12	15M	BPSK	1	1	Bottom of Laptop	16mm	OFF	141500	707.5	23.89	24.00	1.026	0.11	0.143	0.147
	FR1 n12	15M	BPSK	36	22	Bottom of Laptop	16mm	OFF	141500	707.5	23.58	24.00	1.102	0.07	0.132	0.145
	FR1 n12	15M	BPSK	1	1	Bottom Face	13mm	OFF	141500	707.5	23.89	24.00	1.026	-0.06	0.178	0.183
	FR1 n12	15M	BPSK	36	22	Bottom Face	13mm	OFF	141500	707.5	23.58	24.00	1.102	-0.04	0.160	0.176
	FR1 n12	15M	BPSK	1	1	Edge 1	22mm	OFF	141500	707.5	23.89	24.00	1.026	0.01	0.082	0.084
	FR1 n12	15M	BPSK	36	22	Edge 1	22mm	OFF	141500	707.5	23.58	24.00	1.102	0.09	0.059	0.065
	FR1 n12	15M	BPSK	1	1	Edge 2	14mm	OFF	141500	707.5	23.89	24.00	1.026	0.04	0.001	0.001
	FR1 n12	15M	BPSK	36	22	Edge 2	14mm	OFF	141500	707.5	23.58	24.00	1.102	-0.09	0.001	0.001
	FR1 n41 MIMO2	100M	BPSK	1	1	Bottom of Laptop	0mm	ON	518598	2592.99	9.34	9.50	1.038	-0.11	0.092	0.095
	FR1 n41 MIMO2	100M	BPSK	135	69	Bottom of Laptop	0mm	ON	518598	2592.99	9.27	9.50	1.054	0.14	0.084	0.089
	FR1 n41 MIMO2	100M	BPSK	1	1	Bottom Face	0mm	ON	518598	2592.99	9.34	9.50	1.038	-0.15	0.661	0.686
	FR1 n41 MIMO2	100M	BPSK	135	69	Bottom Face	0mm	ON	518598	2592.99	9.27	9.50	1.054	0.01	0.643	0.678
	FR1 n41 MIMO2	100M	BPSK	1	1	Edge 4	0mm	ON	518598	2592.99	9.34	9.50	1.038	0.16	0.221	0.229
	FR1 n41 MIMO2	100M	BPSK	135	69	Edge 4	0mm	ON	518598	2592.99	9.27	9.50	1.054	-0.17	0.215	0.227
	FR1 n41 MIMO2	100M	BPSK	1	1	Bottom of Laptop	15mm	OFF	518598	2592.99	23.70	24.00	1.072	-0.12	0.385	0.413
	FR1 n41 MIMO2	100M	BPSK	135	69	Bottom of Laptop	15mm	OFF	518598	2592.99	23.57	24.00	1.104	-0.02	0.366	0.404
21	FR1 n41 MIMO2	100M	BPSK	1	1	Bottom Face	12mm	OFF	518598	2592.99	23.70	24.00	1.072	-0.11	0.700	0.750
	FR1 n41 MIMO2	100M	BPSK	135	69	Bottom Face	12mm	OFF	518598	2592.99	23.57	24.00	1.104	0.02	0.671	0.741
	FR1 n41 MIMO2	100M	BPSK	1	1	Edge 1	0mm	OFF	518598	2592.99	23.70	24.00	1.072	-0.09	0.123	0.132
	FR1 n41 MIMO2	100M	BPSK	135	69	Edge 1	0mm	OFF	518598	2592.99	23.57	24.00	1.104	-0.09	0.098	0.108
	FR1 n41 MIMO2	100M	BPSK	1	1	Edge 4	9mm	OFF	518598	2592.99	23.70	24.00	1.072	0	0.503	0.539
	FR1 n41 MIMO2	100M	BPSK	135	69	Edge 4	9mm	OFF	518598	2592.99	23.57	24.00	1.104	-0.08	0.448	0.495



FCC SAR TEST REPORT

Report No. : FA092423

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	FR1 n66	20M	BPSK	1	53	Bottom of Laptop	0mm	ON	349000	1745	13.65	14.00	1.084	0.14	0.453	0.491
	FR1 n66	20M	BPSK	50	0	Bottom of Laptop	0mm	ON	349000	1745	13.29	14.00	1.178	0.07	0.415	0.489
	FR1 n66	20M	BPSK	1	53	Bottom Face	0mm	ON	349000	1745	13.65	14.00	1.084	0.03	0.533	0.578
	FR1 n66	20M	BPSK	1	53	Bottom Face	0mm	ON	344000	1720	13.59	14.00	1.099	-0.06	0.585	0.643
	FR1 n66	20M	BPSK	1	53	Bottom Face	0mm	ON	354000	1770	13.51	14.00	1.119	-0.12	0.566	0.634
	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	ON	349000	1745	13.29	14.00	1.178	0.14	0.481	0.566
	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	ON	344000	1720	13.29	14.00	1.178	0.06	0.531	0.625
	FR1 n66	20M	BPSK	50	0	Bottom Face	0mm	ON	354000	1770	13.12	14.00	1.225	-0.17	0.521	0.638
	FR1 n66	20M	BPSK	1	1	Edge 1	0mm	ON	349000	1745	13.65	14.00	1.084	0.05	0.099	0.107
	FR1 n66	20M	BPSK	50	0	Edge 1	0mm	ON	349000	1745	13.29	14.00	1.178	0.09	0.086	0.101
	FR1 n66	20M	BPSK	1	1	Edge 2	0mm	ON	349000	1745	13.65	14.00	1.084	-0.17	0.249	0.270
	FR1 n66	20M	BPSK	50	0	Edge 2	0mm	ON	349000	1745	13.29	14.00	1.178	0.08	0.228	0.268
	FR1 n66	20M	BPSK	1	1	Bottom of Laptop	16mm	OFF	354000	1770	23.07	24.00	1.239	-0.03	0.400	0.496
	FR1 n66	20M	BPSK	50	28	Bottom of Laptop	16mm	OFF	354000	1770	22.95	24.00	1.274	-0.08	0.378	0.481
	FR1 n66	20M	BPSK	1	1	Bottom Face	13mm	OFF	354000	1770	23.07	24.00	1.239	0	0.395	0.489
	FR1 n66	20M	BPSK	50	28	Bottom Face	13mm	OFF	354000	1770	22.95	24.00	1.274	-0.09	0.366	0.466
	FR1 n66	20M	BPSK	1	1	Edge 1	22mm	OFF	354000	1770	23.07	24.00	1.239	-0.09	0.113	0.140
	FR1 n66	20M	BPSK	50	28	Edge 1	22mm	OFF	354000	1770	22.95	24.00	1.274	-0.1	0.098	0.125
	FR1 n66	20M	BPSK	1	1	Edge 2	14mm	OFF	354000	1770	23.07	24.00	1.239	-0.09	0.264	0.327
	FR1 n66	20M	BPSK	50	28	Edge 2	14mm	OFF	354000	1770	22.95	24.00	1.274	0.03	0.233	0.297
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom of Laptop	0mm	ON	349000	1745	10.93	12.50	1.435	0.14	0.414	0.594
	FR1 n66 MIMO2	20M	BPSK	50	0	Bottom of Laptop	0mm	ON	349000	1745	10.51	12.50	1.581	0.06	0.374	0.591
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	349000	1745	10.93	12.50	1.435	0.02	0.438	0.629
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	344000	1720	10.81	12.50	1.476	-0.11	0.434	0.640
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	0mm	ON	354000	1770	10.80	12.50	1.479	-0.13	0.470	0.695
	FR1 n66 MIMO2	20M	BPSK	50	0	Bottom Face	0mm	ON	349000	1745	10.51	12.50	1.581	0.15	0.395	0.625
	FR1 n66 MIMO2	20M	BPSK	1	53	Edge 4	0mm	ON	349000	1745	10.93	12.50	1.435	-0.06	0.296	0.425
	FR1 n66 MIMO2	20M	BPSK	50	0	Edge 4	0mm	ON	349000	1745	10.51	12.50	1.581	-0.17	0.246	0.389
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom of Laptop	15mm	OFF	349000	1745	23.92	24.00	1.019	-0.18	0.603	0.614
	FR1 n66 MIMO2	20M	BPSK	50	28	Bottom of Laptop	15mm	OFF	349000	1745	23.76	24.00	1.057	0.06	0.576	0.609
22	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	349000	1745	23.92	24.00	1.019	-0.16	1.040	1.059
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	344000	1720	23.69	24.00	1.074	0.03	0.967	1.039
	FR1 n66 MIMO2	20M	BPSK	1	53	Bottom Face	12mm	OFF	354000	1770	23.76	24.00	1.057	-0.13	0.982	1.038
	FR1 n66 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	349000	1745	23.76	24.00	1.057	-0.07	0.986	1.042
	FR1 n66 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	344000	1720	23.75	24.00	1.059	0.08	0.942	0.998
	FR1 n66 MIMO2	20M	BPSK	50	28	Bottom Face	12mm	OFF	354000	1770	23.70	24.00	1.072	-0.11	0.939	1.006
	FR1 n66 MIMO2	20M	BPSK	100	0	Bottom Face	12mm	OFF	349000	1745	23.27	23.50	1.054	0.09	0.895	0.944
	FR1 n66 MIMO2	20M	BPSK	1	53	Edge 1	0mm	OFF	349000	1745	23.92	24.00	1.019	0.08	0.235	0.239
	FR1 n66 MIMO2	20M	BPSK	50	28	Edge 1	0mm	OFF	349000	1745	23.76	24.00	1.057	-0.07	0.210	0.222
	FR1 n66 MIMO2	20M	BPSK	1	53	Edge 4	9mm	OFF	349000	1745	23.92	24.00	1.019	0	0.688	0.701
	FR1 n66 MIMO2	20M	BPSK	50	28	Edge 4	9mm	OFF	349000	1745	23.76	24.00	1.057	-0.1	0.613	0.648
	FR1 n71	20M	BPSK	1	1	Bottom of Laptop	0mm	ON	136100	680.5	15.48	16.00	1.127	0.01	0.206	0.232
	FR1 n71	20M	BPSK	50	0	Bottom of Laptop	0mm	ON	136100	680.5	14.81	16.00	1.315	0.13	0.175	0.230
23	FR1 n71	20M	BPSK	1	1	Bottom Face	0mm	ON	136100	680.5	15.48	16.00	1.127	0.12	0.561	0.632
	FR1 n71	20M	BPSK	50	0	Bottom Face	0mm	ON	136100	680.5	14.81	16.00	1.315	-0.11	0.478	0.629
	FR1 n71	20M	BPSK	1	1	Edge 1	0mm	ON	136100	680.5	15.48	16.00	1.127	0.13	0.374	0.422
	FR1 n71	20M	BPSK	50	0	Edge 1	0mm	ON	136100	680.5	14.81	16.00	1.315	0.07	0.318	0.418
	FR1 n71	20M	BPSK	1	1	Edge 2	0mm	ON	136100	680.5	15.48	16.00	1.127	0.15	0.132	0.149
	FR1 n71	20M	BPSK	50	0	Edge 2	0mm	ON	136100	680.5	14.81	16.00	1.315	-0.05	0.109	0.143
	FR1 n71	20M	BPSK	1	1	Bottom of Laptop	16mm	OFF	136100	680.5	23.90	24.00	1.023	-0.01	0.150	0.153
	FR1 n71	20M	BPSK	50	28	Bottom of Laptop	16mm	OFF	136100	680.5	23.64	24.00	1.086	0.09	0.139	0.151
	FR1 n71	20M	BPSK	1	1	Bottom Face	13mm	OFF	136100	680.5	23.90	24.00	1.023	-0.04	0.176	0.180
	FR1 n71	20M	BPSK	50	28	Bottom Face	13mm	OFF	136100	680.5	23.64	24.00	1.086	-0.06	0.155	0.168
	FR1 n71	20M	BPSK	1	1	Edge 1	22mm	OFF	136100	680.5	23.90	24.00	1.023	0.05	0.077	0.079
	FR1 n71	20M	BPSK	50	28	Edge 1	22mm	OFF	136100	680.5	23.64	24.00	1.086	-0.07	0.060	0.065
	FR1 n71	20M	BPSK	1	1	Edge 2	14mm	OFF	136100	680.5	23.90	24.00	1.023	0.03	0.001	0.001
	FR1 n71	20M	BPSK	50	28	Edge 2	14mm	OFF	136100	680.5	23.64	24.00	1.086	-0.09	0.001	0.001

14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 7C	20M_QPSK_1_0	Bottom Face	0mm	ON	20850	2510	14.41	14.50	1.021	-	-	-0.15	1.050	-	1.072
2nd	LTE Band 7C	20M_QPSK_1_0	Bottom Face	0mm	ON	20850	2510	14.41	14.50	1.021	-	-	-0.03	1.020	1.03	1.041
1st	LTE Band 14	10M_QPSK_1_0	Bottom Face	0mm	ON	23330	793	20.16	20.50	1.081	-	-	-0.12	1.100	-	1.190
2nd	LTE Band 14	10M_QPSK_1_0	Bottom Face	0mm	ON	23330	793	20.16	20.50	1.081	-	-	-0.05	1.030	1.08	1.114
1st	LTE Band 26	15M_QPSK_1_0	Bottom Face	0mm	ON	26865	831.5	20.24	20.50	1.062	-	-	-0.13	1.100	-	1.168
2nd	LTE Band 26	15M_QPSK_1_0	Bottom Face	0mm	ON	26865	831.5	20.24	20.50	1.062	-	-	-0.12	1.020	1.08	1.083
1st	LTE Band 26	15M_QPSK_1_0	Bottom Face	0mm	ON	26915	836.5	20.24	20.50	1.062	-	-	-0.13	1.100	-	1.168
2nd	LTE Band 26	15M_QPSK_1_0	Bottom Face	0mm	ON	26915	836.5	20.24	20.50	1.062	-	-	-0.12	1.020	1.08	1.083
1st	LTE Band 30	10M_QPSK_1_0	Bottom Face	0mm	ON	27710	2310	13.13	14.50	1.371	-	-	-0.04	0.845	-	1.158
2nd	LTE Band 30	10M_QPSK_1_0	Bottom Face	0mm	ON	27710	2310	13.13	14.50	1.371	-	-	-0.11	0.837	1.01	1.147
1st	LTE Band 48 MIMO2	20M_QPSK_1_0	Bottom Face	0mm	ON	55340	3560	12.64	13.00	1.086	62.9	1.006	-0.05	1.080	-	1.180
2nd	LTE Band 48 MIMO2	20M_QPSK_1_0	Bottom Face	0mm	ON	55340	3560	12.64	13.00	1.086	62.9	1.006	-0.02	1.020	1.06	1.115
1st	LTE Band 66C	20M_QPSK_1_0	Bottom Face	0mm	ON	132072	1720	16.92	17.00	1.019	-	-	-0.04	1.100	-	1.120
2nd	LTE Band 66C	20M_QPSK_1_0	Bottom Face	0mm	ON	132072	1720	16.92	17.00	1.019	-	-	0.09	1.050	1.05	1.070
1st	FR1 n2 MIMO2	20M_BPSK_1_0	Bottom Face	12mm	OFF	376000	1880	23.73	24.00	1.064	-	-	-0.12	0.913	-	0.972
2nd	FR1 n2 MIMO2	20M_BPSK_1_0	Bottom Face	12mm	OFF	376000	1880	23.73	24.00	1.064	-	-	0.08	0.902	1.01	0.960

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14.3 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device support Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operation is 43.3% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with $< 10\%$ discrepancy between power classes and all reported SAR are $< 1.4\text{ W/kg}$, Separate SAR testing for Power Class 2 is not required

	LTE Band 41 (Power Class 3)	LTE Band 41 (Power Class 2)
Maximum Tune up Power (dBm)	13.5	16.5
Reported 1g SAR (W/kg)	0.915	1.134
Duty Cycle	63.30%	43.30%
Frame Averaged (mW)	14.17	19.34
Linearity SAR(W/kg)	1.25	
% deviation from expected linearity		-9.20%

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + WLAN2.4GHz Ant 1 + WLAN 2.4GHz Ant 2 + FR1	Yes
2.	WWAN + WLAN2.4GHz Ant 2 + Bluetooth Ant 1 + FR1	Yes
3.	WWAN + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + FR1	Yes
4.	WWAN + WLAN5GHz Ant 2 + Bluetooth Ant 1 + FR1	Yes
5.	WWAN + WLAN5GHz Ant 1 + WLAN5GHz Ant 2 + Bluetooth Ant 1 + FR1	Yes
6.	WWAN + Bluetooth Ant 1 + 5GHz WLAN Ant 1+2 + FR1	Yes

General Note:

1. The WLAN/BT module is also integrated into Lenove TP00111A host. The WLAN and Bluetooth SAR results are referenced from Sporton SAR report, report number: CA0D0217 (FCC ID: PU5AX201D2) and these SAR results are also used to perform simultaneous transmission analysis.
2. For 2.4GHz SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - v) The SPLSR calculated results please refer to section 16.2.

**15.1 Body Exposure Conditions**

<EN-DC non-Active>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2+3 Summed 1g SAR (W/kg)	1+4+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+5+6 Summed 1g SAR (W/kg)	1+4+5+6 Summed 1g SAR (W/kg)	1+6+7 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	5GHz WLAN Ant 1	5GHz WLAN Ant 2	Bluetooth Ant 1	5GHz WLAN Ant 1+2 (MIMO)								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
WCDMA II	Bottom of Laptop at 0mm	0.905	0.789	0.659	0.594	0.238	0.365	0.360	2.353	1.737	1.929	1.508	2.102	1.630	0.03	Case 1
	Bottom Face at 0mm	1.107	1.189	0.921	1.020	0.819	0.494	0.770	3.217	2.946	2.522	2.420	3.440	2.371	0.04	Case 2
	Edge 1 at 0mm	0.159							0.159	0.159	0.159	0.159	0.159	0.159		
	Edge 2 at 0mm	0.390	0.240		1.107		0.156	0.573	0.630	1.497	0.546	0.546	1.653	1.119	0.02	Case 3
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
WCDMA IV	Bottom of Laptop at 0mm	1.095	0.789	0.659	0.594	0.238	0.365	0.360	2.543	1.927	2.119	1.698	2.292	1.820	0.03	Case 4
	Bottom Face at 0mm	1.189	1.189	0.921	1.020	0.819	0.494	0.770	3.299	3.028	2.604	2.502	3.522	2.453	0.04	Case 5
	Edge 1 at 0mm	0.200							0.200	0.200	0.200	0.200	0.200	0.200		
	Edge 2 at 0mm	0.524	0.240		1.107		0.156	0.573	0.764	1.631	0.680	0.680	1.787	1.253	0.03	Case 6
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
WCDMA V	Bottom of Laptop at 0mm	0.945	0.789	0.659	0.594	0.238	0.365	0.360	2.393	1.777	1.969	1.548	2.142	1.670	0.02	Case 7
	Bottom Face at 0mm	1.093	1.189	0.921	1.020	0.819	0.494	0.770	3.203	2.932	2.508	2.406	3.426	2.357	0.03	Case 8
	Edge 1 at 0mm	0.576							0.576	0.576	0.576	0.576	0.576	0.576		
	Edge 2 at 0mm	0.035	0.240		1.107		0.156	0.573	0.275	1.142	0.191	0.191	1.298	0.764		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 2 MIMO2	Bottom of Laptop at 0mm	0.370	0.789	0.659	0.594	0.238	0.365	0.360	1.818	1.202	1.394	0.973	1.567	1.095	0.02	Case 9
	Bottom Face at 0mm	0.689	1.189	0.921	1.020	0.819	0.494	0.770	2.799	2.528	2.104	2.002	3.022	1.953	0.03	Case 10
	Edge 1 at 0mm	0.118							0.118	0.118	0.118	0.118	0.118	0.118		
	Edge 2 at 0mm		0.240		1.107		0.156	0.573	0.240	1.107	0.156	0.156	1.263	0.729		
	Edge 4 at 0mm	0.293		0.288		0.567		0.474	0.581	0.860	0.581	0.860	0.860	0.767		
LTE Band 7	Bottom of Laptop at 0mm	0.535	0.789	0.659	0.594	0.238	0.365	0.360	1.983	1.367	1.559	1.138	1.732	1.260	0.02	Case 11
	Bottom Face at 0mm	1.137	1.189	0.921	1.020	0.819	0.494	0.770	3.247	2.976	2.552	2.450	3.470	2.401	0.03	Case 12
	Edge 1 at 0mm	0.093							0.093	0.093	0.093	0.093	0.093	0.093		
	Edge 2 at 0mm	0.196	0.240		1.107		0.156	0.573	0.436	1.303	0.352	0.352	1.459	0.925		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 7 MIMO2	Bottom of Laptop at 0mm	0.197	0.789	0.659	0.594	0.238	0.365	0.360	1.645	1.029	1.221	0.800	1.394	0.922	0.01	Case 13
	Bottom Face at 0mm	0.631	1.189	0.921	1.020	0.819	0.494	0.770	2.741	2.470	2.046	1.944	2.964	1.895	0.03	Case 14
	Edge 1 at 0mm	0.125							0.125	0.125	0.125	0.125	0.125	0.125		
	Edge 2 at 0mm		0.240		1.107		0.156	0.573	0.240	1.107	0.156	0.156	1.263	0.729		
	Edge 4 at 0mm	0.117		0.288		0.567		0.474	0.405	0.684	0.405	0.684	0.684	0.591		
LTE Band 12	Bottom of Laptop at 0mm	0.365	0.789	0.659	0.594	0.238	0.365	0.360	1.813	1.197	1.389	0.968	1.562	1.090	0.02	Case 15
	Bottom Face at 0mm	1.089	1.189	0.921	1.020	0.819	0.494	0.770	3.199	2.928	2.504	2.402	3.422	2.353	0.03	Case 16
	Edge 1 at 0mm	0.340							0.340	0.340	0.340	0.340	0.340	0.340		
	Edge 2 at 0mm	0.083	0.240		1.107		0.156	0.573	0.323	1.190	0.239	0.239	1.346	0.812		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 13	Bottom of Laptop at 0mm	0.742	0.789	0.659	0.594	0.238	0.365	0.360	2.190	1.574	1.766	1.345	1.939	1.467	0.02	Case 17
	Bottom Face at 0mm	1.165	1.189	0.921	1.020	0.819	0.494	0.770	3.275	3.004	2.580	2.478	3.498	2.429	0.03	Case 18
	Edge 1 at 0mm	0.446							0.446	0.446	0.446	0.446	0.446	0.446		
	Edge 2 at 0mm	0.045	0.240		1.107		0.156	0.573	0.285	1.152	0.201	0.201	1.308	0.774		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 14	Bottom of Laptop at 0mm	0.931	0.789	0.659	0.594	0.238	0.365	0.360	2.379	1.763	1.955	1.534	2.128	1.656	0.02	Case 19
	Bottom Face at 0mm	1.190	1.189	0.921	1.020	0.819	0.494	0.770	3.300	3.029	2.605	2.503	3.523	2.454	0.03	Case 20
	Edge 1 at 0mm	0.694							0.694	0.694	0.694	0.694	0.694	0.694		
	Edge 2 at 0mm	0.054	0.240		1.107		0.156	0.573	0.294	1.161	0.210	0.210	1.317	0.783		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 25	Bottom of Laptop at 0mm	1.032	0.789	0.659	0.594	0.238	0.365	0.360	2.480	1.864	2.056	1.635	2.229	1.757	0.03	Case 21
	Bottom Face at 0mm	1.124	1.189	0.921	1.020	0.819	0.494	0.770	3.234	2.963	2.539	2.437	3.457	2.388	0.04	Case 22
	Edge 1 at 0mm	0.113							0.113	0.113	0.113	0.113	0.113	0.113		
	Edge 2 at 0mm	0.381	0.240		1.107		0.156	0.573	0.621	1.488	0.537	0.537	1.644	1.110	0.02	Case 23



FCC SAR TEST REPORT

Report No. : FA092423

	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 26	Bottom of Laptop at 0mm	0.971	0.789	0.659	0.594	0.238	0.365	0.360	2.419	1.803	1.995	1.574	2.168	1.696	0.02	Case 24
	Bottom Face at 0mm	1.168	1.189	0.921	1.020	0.819	0.494	0.770	3.278	3.007	2.583	2.481	3.501	2.432	0.03	Case 25
	Edge 1 at 0mm	0.630							0.630	0.630	0.630	0.630	0.630	0.630		
	Edge 2 at 0mm	0.039	0.240		1.107		0.156	0.573	0.279	1.146	0.195	0.195	1.302	0.768		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 30	Bottom of Laptop at 0mm	0.681	0.789	0.659	0.594	0.238	0.365	0.360	2.129	1.513	1.705	1.284	1.878	1.406	0.02	Case 26
	Bottom Face at 0mm	1.158	1.189	0.921	1.020	0.819	0.494	0.770	3.268	2.997	2.573	2.471	3.491	2.422	0.03	Case 27
	Edge 1 at 0mm	0.594							0.594	0.594	0.594	0.594	0.594	0.594		
	Edge 2 at 0mm	0.041	0.240		1.107		0.156	0.573	0.281	1.148	0.197	0.197	1.304	0.770		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 41	Bottom of Laptop at 0mm	0.308	0.789	0.659	0.594	0.238	0.365	0.360	1.756	1.140	1.332	0.911	1.505	1.033	0.01	Case 28
	Bottom Face at 0mm	0.915	1.189	0.921	1.020	0.819	0.494	0.770	3.025	2.754	2.330	2.228	3.248	2.179	0.04	Case 29
	Edge 1 at 0mm	0.070							0.070	0.070	0.070	0.070	0.070	0.070		
	Edge 2 at 0mm	0.123	0.240		1.107		0.156	0.573	0.363	1.230	0.279	0.279	1.386	0.852		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 48 MIMO2	Bottom of Laptop at 0mm	0.450	0.789	0.659	0.594	0.238	0.365	0.360	1.898	1.282	1.474	1.053	1.647	1.175	0.02	Case 32
	Bottom Face at 0mm	1.180	1.189	0.921	1.020	0.819	0.494	0.770	3.290	3.019	2.595	2.493	3.513	2.444	0.04	Case 33
	Edge 1 at 0mm	0.083							0.083	0.083	0.083	0.083	0.083	0.083		
	Edge 2 at 0mm		0.240		1.107		0.156	0.573	0.240	1.107	0.156	0.156	1.263	0.729		
	Edge 4 at 0mm	0.601		0.288		0.567		0.474	0.889	1.168	0.889	1.168	1.168	1.075		
LTE Band 66	Bottom of Laptop at 0mm	1.119	0.789	0.659	0.594	0.238	0.365	0.360	2.567	1.951	2.143	1.722	2.316	1.844	0.03	Case 34
	Bottom Face at 0mm	1.132	1.189	0.921	1.020	0.819	0.494	0.770	3.242	2.971	2.547	2.445	3.465	2.396	0.04	Case 35
	Edge 1 at 0mm	0.218							0.218	0.218	0.218	0.218	0.218	0.218		
	Edge 2 at 0mm	0.678	0.240		1.107		0.156	0.573	0.918	1.785	0.834	0.834	1.941	1.407	0.03	Case 36
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 66 MIMO2	Bottom of Laptop at 0mm	0.427	0.789	0.659	0.594	0.238	0.365	0.360	1.875	1.259	1.451	1.030	1.624	1.152	0.02	Case 37
	Bottom Face at 0mm	0.679	1.189	0.921	1.020	0.819	0.494	0.770	2.789	2.518	2.094	1.992	3.012	1.943	0.03	Case 38
	Edge 1 at 0mm	0.150							0.150	0.150	0.150	0.150	0.150	0.150		
	Edge 2 at 0mm		0.240		1.107		0.156	0.573	0.240	1.107	0.156	0.156	1.263	0.729		
	Edge 4 at 0mm	0.456		0.288		0.567		0.474	0.744	1.023	0.744	1.023	1.023	0.930		
LTE Band 71	Bottom of Laptop at 0mm	0.408	0.789	0.659	0.594	0.238	0.365	0.360	1.856	1.240	1.432	1.011	1.605	1.133	0.02	Case 39
	Bottom Face at 0mm	1.136	1.189	0.921	1.020	0.819	0.494	0.770	3.246	2.975	2.551	2.449	3.469	2.400	0.03	Case 40
	Edge 1 at 0mm	0.798							0.798	0.798	0.798	0.798	0.798	0.798		
	Edge 2 at 0mm	0.255	0.240		1.107		0.156	0.573	0.495	1.362	0.411	0.411	1.518	0.984		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.288	0.567	0.567	0.474		
LTE Band 5	Bottom of Laptop at 0mm	0.937	0.789	0.659	0.594	0.238	0.365	0.360	2.385	1.769	2.091	1.896	2.134	1.540	0.02	Case 87
	Bottom Face at 0mm	1.139	1.189	0.921	1.020	0.819	0.494	0.770	3.249	2.978	2.822	2.653	3.472	2.452	0.03	Case 88
	Edge 1 at 0mm	0.617							0.617	0.617	0.617	0.617	0.617	0.617		
	Edge 2 at 0mm	0.031	0.240		1.107		0.156	0.573	0.271	1.138	0.427	1.294	1.294	0.187		
	Edge 4 at 0mm			0.288		0.567		0.474	0.288	0.567	0.000	0.000	0.567	0.567		



<When EN-DC is active>

General Note:

- 1.
2. Test positions and test channels used for the testing below are based on the standalone LTE SAR result. When the EN-DC active the LTE Anchors Band output power is equal or less than the standalone output power for each frequency bands, therefore, LTE Anchors Band power and SAR was estimated based on standalone results to performed sim-Tx analysis with 5G NR and WiFi and Bluetooth. When the EN-DC is active the LTE Anchors Band power are list as below table.
3. The single uplink 1g SAR values for each LTE Anchors Bands and 5G NR are both less than 0.8W/kg and the algebraic summation of the 1g SAR value are less than 1.45W/kg, additional measurements are not required according to TCBC workshop guidance, the detail sim-Tx analysis as following.

WWAN Band	FR1 Band	Exposure Position	LTE Standalone Maximum Power (dBm)	0	EN-DC Active LTE Maximum Power (dBm)	1	2	3	4	5	6	7	8	1+2+3+4 Summed 1g SAR (W/kg)	1+2+5+6 Summed 1g SAR (W/kg)	1+2+4+7 Summed 1g SAR (W/kg)	1+2+6+7 Summed 1g SAR (W/kg)	1+2+5+6+7 Summed 1g SAR (W/kg)	1+2+7+8 Summed 1g SAR (W/kg)	SPLSR	Case No
				WWAN 1g SAR (W/kg)	EN-DC Active LTE Maximum Power (dBm)	EN-DC Active Estimated LTE 1g SAR (W/kg)	FR1 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 2 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 1+2 (MIMO) 1g SAR (W/kg)								
LTE Band 2 MIMO2	FR1 n5	Bottom of Laptop at 0mm	12.50	0.370	12.50	0.370	0.323	0.789	0.659	0.594	0.238	0.365	0.360	2.141	1.525	1.717	1.296	1.890	1.418	0.02	Case 41
		Bottom Face at 0mm	12.50	0.689	12.50	0.689	0.687	1.189	0.921	1.020	0.819	0.494	0.770	3.486	3.215	2.791	2.689	3.709	2.640	0.03	Case 42
		Edge 1 at 0mm	24.00	0.118	24.00	0.118	0.398							0.516	0.516	0.516	0.516	0.516	0.516		
		Edge 2 at 0mm					0.140	0.240		1.107		0.156	0.573	0.380	1.247	0.296	0.296	1.403	0.869		
		Edge 4 at 0mm	12.50	0.293	12.50	0.293			0.288		0.567		0.474	0.581	0.860	0.581	0.860	0.860	0.767		
	FR1 n12	Bottom of Laptop at 0mm	12.50	0.370	12.50	0.370	0.206	0.789	0.659	0.594	0.238	0.365	0.360	2.024	1.408	1.600	1.179	1.773	1.301	0.02	Case 43
		Bottom Face at 0mm	12.50	0.689	12.50	0.689	0.618	1.189	0.921	1.020	0.819	0.494	0.770	3.417	3.146	2.722	2.620	3.640	2.571	0.03	Case 44
		Edge 1 at 0mm	24.00	0.118	24.00	0.118	0.216							0.334	0.334	0.334	0.334	0.334	0.334		
		Edge 2 at 0mm					0.044	0.240		1.107		0.156	0.573	0.284	1.151	0.200	0.200	1.307	0.773		
		Edge 4 at 0mm	12.50	0.293	12.50	0.293			0.288		0.567		0.474	0.581	0.860	0.581	0.860	0.860	0.767		
	FR1 n71	Bottom of Laptop at 0mm	12.50	0.370	12.50	0.370	0.232	0.789	0.659	0.594	0.238	0.365	0.360	2.050	1.434	1.626	1.205	1.799	1.327	0.02	Case 45
		Bottom Face at 0mm	12.50	0.689	12.50	0.689	0.632	1.189	0.921	1.020	0.819	0.494	0.770	3.431	3.160	2.736	2.634	3.654	2.585	0.03	Case 46
		Edge 1 at 0mm	24.00	0.118	24.00	0.118	0.422							0.540	0.540	0.540	0.540	0.540	0.540		
		Edge 2 at 0mm					0.149	0.240		1.107		0.156	0.573	0.389	1.256	0.305	0.305	1.412	0.878		
		Edge 4 at 0mm	12.50	0.293	12.50	0.293			0.288		0.567		0.474	0.581	0.860	0.581	0.860	0.860	0.767		
LTE Band 5	FR1 n2 MIMO2	Bottom of Laptop at 0mm	20.50	0.937	18.50	0.591	0.370	0.789	0.659	0.594	0.238	0.365	0.360	2.409	1.793	1.985	1.564	2.158	1.686	0.02	Case 47
		Bottom Face at 0mm	20.50	1.139	18.50	0.719	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.515	3.244	2.820	2.718	3.738	2.669	0.03	Case 48
		Edge 1 at 0mm	20.50	0.617	18.50	0.389	0.227							0.616	0.616	0.616	0.616	0.616	0.616		
		Edge 2 at 0mm	20.50	0.031	18.50	0.020		0.240		1.107		0.156	0.573	0.260	1.127	0.176	0.176	1.283	0.749		
		Edge 4 at 0mm					0.271		0.288		0.567		0.474	0.559	0.838	0.559	0.838	0.838	0.745		
	FR1 n7 MIMO2	Bottom of Laptop at 0mm	20.50	0.937	18.50	0.591	0.211	0.789	0.659	0.594	0.238	0.365	0.360	2.250	1.634	1.826	1.405	1.999	1.527	0.02	Case 49
		Bottom Face at 0mm	20.50	1.139	18.50	0.719	0.699	1.189	0.921	1.020	0.819	0.494	0.770	3.528	3.257	2.833	2.731	3.751	2.682	0.03	Case 50
		Edge 1 at 0mm	20.50	0.617	18.50	0.389	0.130							0.519	0.519	0.519	0.519	0.519	0.519		
		Edge 2 at 0mm	20.50	0.031	18.50	0.020		0.240		1.107		0.156	0.573	0.260	1.127	0.176	0.176	1.283	0.749		
		Edge 4 at 0mm					0.136		0.288		0.567		0.474	0.424	0.703	0.424	0.703	0.703	0.610		
	FR1 n66 MIMO2	Bottom of Laptop at 0mm	20.50	0.937	18.50	0.591	0.594	0.789	0.659	0.594	0.238	0.365	0.360	2.633	2.017	2.209	1.788	2.382	1.910	0.03	Case 51
		Bottom Face at 0mm	20.50	1.139	18.50	0.719	0.695	1.189	0.921	1.020	0.819	0.494	0.770	3.524	3.253	2.829	2.727	3.747	2.678	0.03	Case 52
		Edge 1 at 0mm	20.50	0.617	18.50	0.389	0.239							0.628	0.628	0.628	0.628	0.628	0.628		
		Edge 2 at 0mm	20.50	0.031	18.50	0.020		0.240		1.107		0.156	0.573	0.260	1.127	0.176	0.176	1.283	0.749		
		Edge 4 at 0mm					0.425		0.288		0.567		0.474	0.713	0.992	0.713	0.992	0.992	0.899		
LTE Band 7 MIMO2	FR1 n5	Bottom of Laptop at 0mm	12.00	0.197	12.00	0.197	0.323	0.789	0.659	0.594	0.238	0.365	0.360	1.968	1.352	1.544	1.123	1.717	1.245	0.01	Case 53
		Bottom Face at 0mm	12.00	0.631	12.00	0.631	0.687	1.189	0.921	1.020	0.819	0.494	0.770	3.428	3.157	2.733	2.631	3.651	2.582	0.03	Case 54
		Edge 1 at 0mm	24.00	0.125	24.00	0.125	0.398							0.523	0.523	0.523	0.523	0.523	0.523		
		Edge 2 at 0mm					0.140	0.240		1.107		0.156	0.573	0.380	1.247	0.296	0.296	1.403	0.869		
		Edge 4 at 0mm	12.00	0.117	12.00	0.117			0.288		0.567		0.474	0.405	0.684	0.405	0.684	0.684	0.591		
	FR1 n71	Bottom of Laptop at 0mm	12.00	0.197	12.00	0.197	0.232	0.789	0.659	0.594	0.238	0.365	0.360	1.877	1.261	1.453	1.032	1.626	1.154	0.01	Case 55
		Bottom Face at 0mm	12.00	0.631	12.00	0.631	0.632	1.189	0.921	1.020	0.819	0.494	0.770	3.373	3.102	2.678	2.576	3.596	2.527	0.03	Case 56



FCC SAR TEST REPORT

Report No. : FA092423

		Edge 1 at 0mm	24.00	0.125	24.00	0.125	0.422							0.547	0.547	0.547	0.547	0.547	0.547		
		Edge 2 at 0mm					0.149	0.240		1.107		0.156	0.573	0.389	1.256	0.305	0.305	1.412	0.878		
		Edge 4 at 0mm	12.00	0.117	12.00	0.117			0.288		0.567		0.474	0.405	0.684	0.405	0.684	0.684	0.591		
LTE Band 12	FR1 n2 MIMO2	Bottom of Laptop at 0mm	18.50	0.365	16.50	0.230	0.370	0.789	0.659	0.594	0.238	0.365	0.360	2.048	1.432	1.624	1.203	1.797	1.325	0.02	Case 57
		Bottom Face at 0mm	18.50	1.089	16.50	0.687	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.483	3.212	2.788	2.686	3.706	2.637	0.03	Case 58
		Edge 1 at 0mm	18.50	0.340	16.50	0.215	0.227							0.442	0.442	0.442	0.442	0.442	0.442		
		Edge 2 at 0mm	18.50	0.083	16.50	0.052		0.240		1.107		0.156	0.573	0.292	1.159	0.208	0.208	1.315	0.781		
		Edge 4 at 0mm					0.271		0.288		0.567		0.474	0.559	0.838	0.559	0.838	0.838	0.745		
	FR1 n7 MIMO2	Bottom of Laptop at 0mm	18.50	0.365	16.50	0.230	0.211	0.789	0.659	0.594	0.238	0.365	0.360	1.889	1.273	1.465	1.044	1.638	1.166	0.01	Case 59
		Bottom Face at 0mm	18.50	1.089	16.50	0.687	0.699	1.189	0.921	1.020	0.819	0.494	0.770	3.496	3.225	2.801	2.699	3.719	2.650	0.03	Case 60
		Edge 1 at 0mm	18.50	0.340	16.50	0.215	0.130							0.345	0.345	0.345	0.345	0.345	0.345		
		Edge 2 at 0mm	18.50	0.083	16.50	0.052		0.240		1.107		0.156	0.573	0.292	1.159	0.208	0.208	1.315	0.781		
		Edge 4 at 0mm					0.136		0.288		0.567		0.474	0.424	0.703	0.424	0.703	0.703	0.610		
	FR1 n66 MIMO2	Bottom of Laptop at 0mm	18.50	0.365	16.50	0.230	0.594	0.789	0.659	0.594	0.238	0.365	0.360	2.272	1.656	1.848	1.427	2.021	1.549	0.03	Case 61
		Bottom Face at 0mm	18.50	1.089	16.50	0.687	0.695	1.189	0.921	1.020	0.819	0.494	0.770	3.492	3.221	2.797	2.695	3.715	2.646	0.03	Case 62
		Edge 1 at 0mm	18.50	0.340	16.50	0.215	0.239							0.454	0.454	0.454	0.454	0.454	0.454		
		Edge 2 at 0mm	18.50	0.083	16.50	0.052		0.240		1.107		0.156	0.573	0.292	1.159	0.208	0.208	1.315	0.781		
		Edge 4 at 0mm					0.425		0.288		0.567		0.474	0.713	0.992	0.713	0.992	0.992	0.899		
LTE Band 13	FR1 n2 MIMO2	Bottom of Laptop at 0mm	19.50	0.742	17.50	0.468	0.370	0.789	0.659	0.594	0.238	0.365	0.360	2.286	1.670	1.862	1.441	2.035	1.563	0.02	Case 63
		Bottom Face at 0mm	19.50	1.165	17.50	0.735	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.531	3.260	2.836	2.734	3.754	2.685	0.03	Case 64
		Edge 1 at 0mm	19.50	0.446	17.50	0.281	0.227							0.508	0.508	0.508	0.508	0.508	0.508		
		Edge 2 at 0mm	19.50	0.045	17.50	0.028		0.240		1.107		0.156	0.573	0.268	1.135	0.184	0.184	1.291	0.757		
		Edge 4 at 0mm					0.271		0.288		0.567		0.474	0.559	0.838	0.559	0.838	0.838	0.745		
	FR1 n66 MIMO2	Bottom of Laptop at 0mm	19.50	0.742	17.50	0.468	0.594	0.789	0.659	0.594	0.238	0.365	0.360	2.510	1.894	2.086	1.665	2.259	1.787	0.03	Case 65
		Bottom Face at 0mm	19.50	1.165	17.50	0.735	0.695	1.189	0.921	1.020	0.819	0.494	0.770	3.540	3.269	2.845	2.743	3.763	2.694	0.03	Case 66
		Edge 1 at 0mm	19.50	0.446	17.50	0.281	0.239							0.520	0.520	0.520	0.520	0.520	0.520		
		Edge 2 at 0mm	19.50	0.045	17.50	0.028		0.240		1.107		0.156	0.573	0.268	1.135	0.184	0.184	1.291	0.757		
		Edge 4 at 0mm					0.425		0.288		0.567		0.474	0.713	0.992	0.713	0.992	0.992	0.899		
LTE Band 25	FR1 n41 MIMO2	Bottom of Laptop at 0mm	16.50	1.032	14.50	0.651	0.095	0.789	0.659	0.594	0.238	0.365	0.360	2.194	1.578	1.770	1.349	1.943	1.471	0.02	Case 67
		Bottom Face at 0mm	16.50	1.124	14.50	0.709	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.505	3.234	2.810	2.708	3.728	2.659	0.04	Case 68
		Edge 1 at 0mm	16.50	0.113	14.50	0.071	0.132							0.203	0.203	0.203	0.203	0.203	0.203		
		Edge 2 at 0mm	16.50	0.381	14.50	0.240		0.240		1.107		0.156	0.573	0.480	1.347	0.396	0.396	1.503	0.969		
		Edge 4 at 0mm					0.229		0.288		0.567		0.474	0.517	0.796	0.517	0.796	0.796	0.703		
LTE Band 26	FR1 n41 MIMO2	Bottom of Laptop at 0mm	20.50	0.971	18.50	0.613	0.095	0.789	0.659	0.594	0.238	0.365	0.360	2.156	1.540	1.732	1.311	1.905	1.433	0.02	Case 69
		Bottom Face at 0mm	20.50	1.168	18.50	0.737	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.533	3.262	2.838	2.736	3.756	2.687	0.03	Case 70
		Edge 1 at 0mm	20.50	0.630	18.50	0.398	0.132							0.530	0.530	0.530	0.530	0.530	0.530		
		Edge 2 at 0mm	20.50	0.039	18.50	0.025		0.240		1.107		0.156	0.573	0.265	1.132	0.181	0.181	1.288	0.754		
		Edge 4 at 0mm					0.229		0.288		0.567		0.474	0.517	0.796	0.517	0.796	0.796	0.703		
LTE Band 48 MIMO2	FR1 n2	Bottom of Laptop at 0mm	13.00	0.450	11.00	0.284	0.558	0.789	0.659	0.594	0.238	0.365	0.360	2.290	1.674	1.866	1.445	2.039	1.567	0.02	Case 71
		Bottom Face at 0mm	13.00	1.180	11.00	0.745	0.698	1.189	0.921	1.020	0.819	0.494	0.770	3.553	3.282	2.858	2.756	3.776	2.707	0.04	Case 72
		Edge 1 at 0mm	22.00	0.083	22.00	0.083	0.067							0.150	0.150	0.150	0.150	0.150	0.150		
		Edge 2 at 0mm					0.218	0.240		1.107		0.156	0.573	0.458	1.325	0.374	0.374	1.481	0.947		
		Edge 4 at 0mm	13.00	0.601	11.00	0.379			0.288		0.567		0.474	0.667	0.946	0.667	0.946	0.946	0.853		
	FR1 n5	Bottom of Laptop at 0mm	13.00	0.450	11.00	0.284	0.323	0.789	0.659	0.594	0.238	0.365	0.360	2.055	1.439	1.631	1.210	1.804	1.332	0.02	Case 73
		Bottom Face at 0mm	13.00	1.180	11.00	0.745	0.687	1.189	0.921	1.020	0.819	0.494	0.770	3.542	3.271	2.847	2.745	3.765	2.696	0.03	Case 74
		Edge 1 at 0mm	22.00	0.083	22.00	0.083	0.398							0.481	0.481	0.481	0.481	0.481	0.481		
		Edge 2 at 0mm					0.140	0.240		1.107		0.156	0.573	0.380	1.247	0.296	0.296	1.403	0.869		
		Edge 4 at 0mm	13.00	0.601	11.00	0.379			0.288		0.567		0.474	0.667	0.946	0.667	0.946	0.946	0.853		
	FR1 n66	Bottom of Laptop at 0mm	13.00	0.450	11.00	0.284	0.491	0.789	0.659	0.594	0.238	0.365	0.360	2.223	1.607	1.799	1.378	1.972	1.500	0.02	Case 75
		Bottom Face at 0mm	13.00	1.180	11.00	0.745	0.643	1.189	0.921	1.020	0.819	0.494	0.770	3.498	3.227	2.803	2.701	3.721	2.652	0.04	Case 76
		Edge 1 at 0mm	22.00	0.083	22.00	0.083	0.107							0.190	0.190	0.190	0.190	0.190	0.190		
		Edge 2 at 0mm					0.270	0.240		1.107		0.156	0.573	0.510	1.377	0.426	0.426	1.533	0.999		
		Edge 4 at 0mm	13.00	0.601	11.00	0.379			0.288		0.567		0.474	0.667	0.946	0.667	0.946	0.946	0.853		
LTE Band 66	FR1 n41 MIMO2	Bottom of Laptop at 0mm	17.00	1.119	15.00	0.706	0.095	0.789	0.659	0.594	0.238	0.365	0.360	2.249	1.633	1.825	1.404	1.998	1.526	0.02	Case 77



FCC SAR TEST REPORT


Report No. : FA092423


		Bottom Face at 0mm	17.00	1.132	15.00	0.714	0.686	1.189	0.921	1.020	0.819	0.494	0.770	3.510	3.239	2.815	2.713	3.733	2.664	0.04	Case 78
		Edge 1 at 0mm	17.00	0.218	15.00	0.138	0.132							0.270	0.270	0.270	0.270	0.270	0.270		
		Edge 2 at 0mm	17.00	0.678	15.00	0.428		0.240		1.107		0.156	0.573	0.668	1.535	0.584	0.584	1.691	1.157	0.02	Case 87
		Edge 4 at 0mm					0.229		0.288		0.567		0.474	0.517	0.796	0.517	0.796	0.796	0.703		
LTE Band 66 MIMO2	FR1 n5	Bottom of Laptop at 0mm	11.50	0.427	11.50	0.427	0.323	0.789	0.659	0.594	0.238	0.365	0.360	2.198	1.582	1.774	1.353	1.947	1.475	0.02	Case 79
		Bottom Face at 0mm	11.50	0.679	11.50	0.679	0.687	1.189	0.921	1.020	0.819	0.494	0.770	3.476	3.205	2.781	2.679	3.699	2.630	0.03	Case 80
		Edge 1 at 0mm	24.00	0.150	24.00	0.150	0.398							0.548	0.548	0.548	0.548	0.548	0.548		
		Edge 2 at 0mm					0.140	0.240		1.107		0.156	0.573	0.380	1.247	0.296	0.296	1.403	0.869		
		Edge 4 at 0mm	11.50	0.456	11.50	0.456			0.288		0.567		0.474	0.744	1.023	0.744	1.023	1.023	0.930		
	FR1 n12	Bottom of Laptop at 0mm	11.50	0.427	11.50	0.427	0.206	0.789	0.659	0.594	0.238	0.365	0.360	2.081	1.465	1.657	1.236	1.830	1.358	0.02	Case 81
		Bottom Face at 0mm	11.50	0.679	11.50	0.679	0.618	1.189	0.921	1.020	0.819	0.494	0.770	3.407	3.136	2.712	2.610	3.630	2.561	0.03	Case 82
		Edge 1 at 0mm	24.00	0.150	24.00	0.150	0.216							0.366	0.366	0.366	0.366	0.366	0.366		
		Edge 2 at 0mm					0.044	0.240		1.107		0.156	0.573	0.284	1.151	0.200	0.200	1.307	0.773		
		Edge 4 at 0mm	11.50	0.456	11.50	0.456			0.288		0.567		0.474	0.744	1.023	0.744	1.023	1.023	0.930		
	FR1 n71	Bottom of Laptop at 0mm	11.50	0.427	11.50	0.427	0.232	0.789	0.659	0.594	0.238	0.365	0.360	2.107	1.491	1.683	1.262	1.856	1.384	0.02	Case 83
		Bottom Face at 0mm	11.50	0.679	11.50	0.679	0.632	1.189	0.921	1.020	0.819	0.494	0.770	3.421	3.150	2.726	2.624	3.644	2.575	0.03	Case 84
		Edge 1 at 0mm	24.00	0.150	24.00	0.150	0.422							0.572	0.572	0.572	0.572	0.572	0.572		
		Edge 2 at 0mm					0.149	0.240		1.107		0.156	0.573	0.389	1.256	0.305	0.305	1.412	0.878		
		Edge 4 at 0mm	11.50	0.456	11.50	0.456			0.288		0.567		0.474	0.744	1.023	0.744	1.023	1.023	0.930		
LTE Band 71	FR1 n66 MIMO2	Bottom of Laptop at 0mm	18.50	0.408	16.50	0.257	0.594	0.789	0.659	0.594	0.238	0.365	0.360	2.299	1.683	1.875	1.454	2.048	1.576	0.03	Case 85
		Bottom Face at 0mm	18.50	1.136	16.50	0.717	0.695	1.189	0.921	1.020	0.819	0.494	0.770	3.522	3.251	2.827	2.725	3.745	2.676	0.03	Case 86
		Edge 1 at 0mm	18.50	0.798	16.50	0.504	0.239							0.743	0.743	0.743	0.743	0.743	0.743		
		Edge 2 at 0mm	18.50	0.255	16.50	0.161		0.240		1.107		0.156	0.573	0.401	1.268	0.317	0.317	1.424	0.890		
		Edge 4 at 0mm					0.425		0.288		0.567		0.474	0.713	0.992	0.713	0.992	0.992	0.899		



15.2 SPLSR Evaluation and Analysis


General Note:

1. $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
2. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

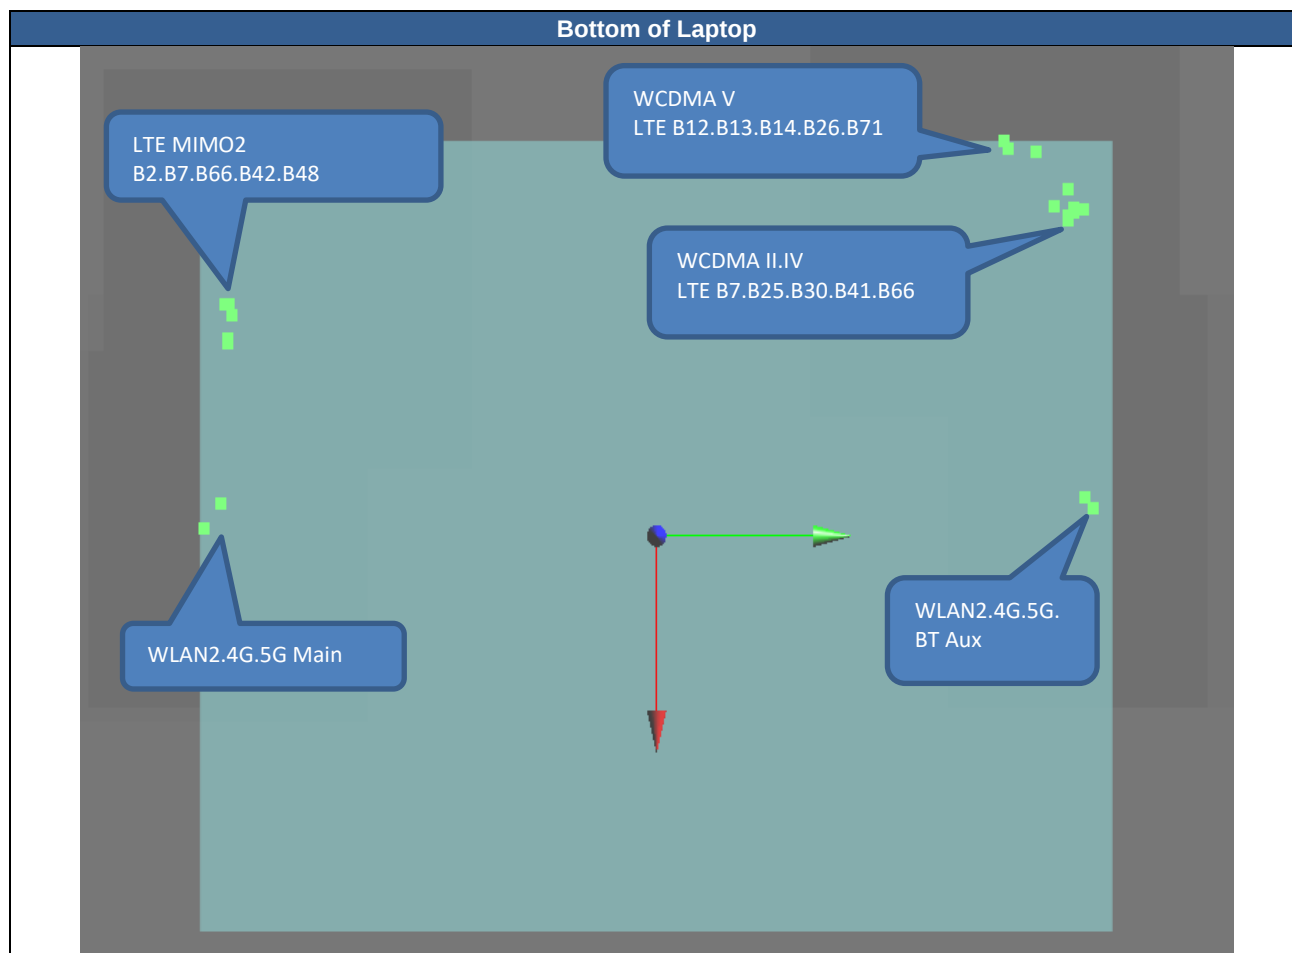

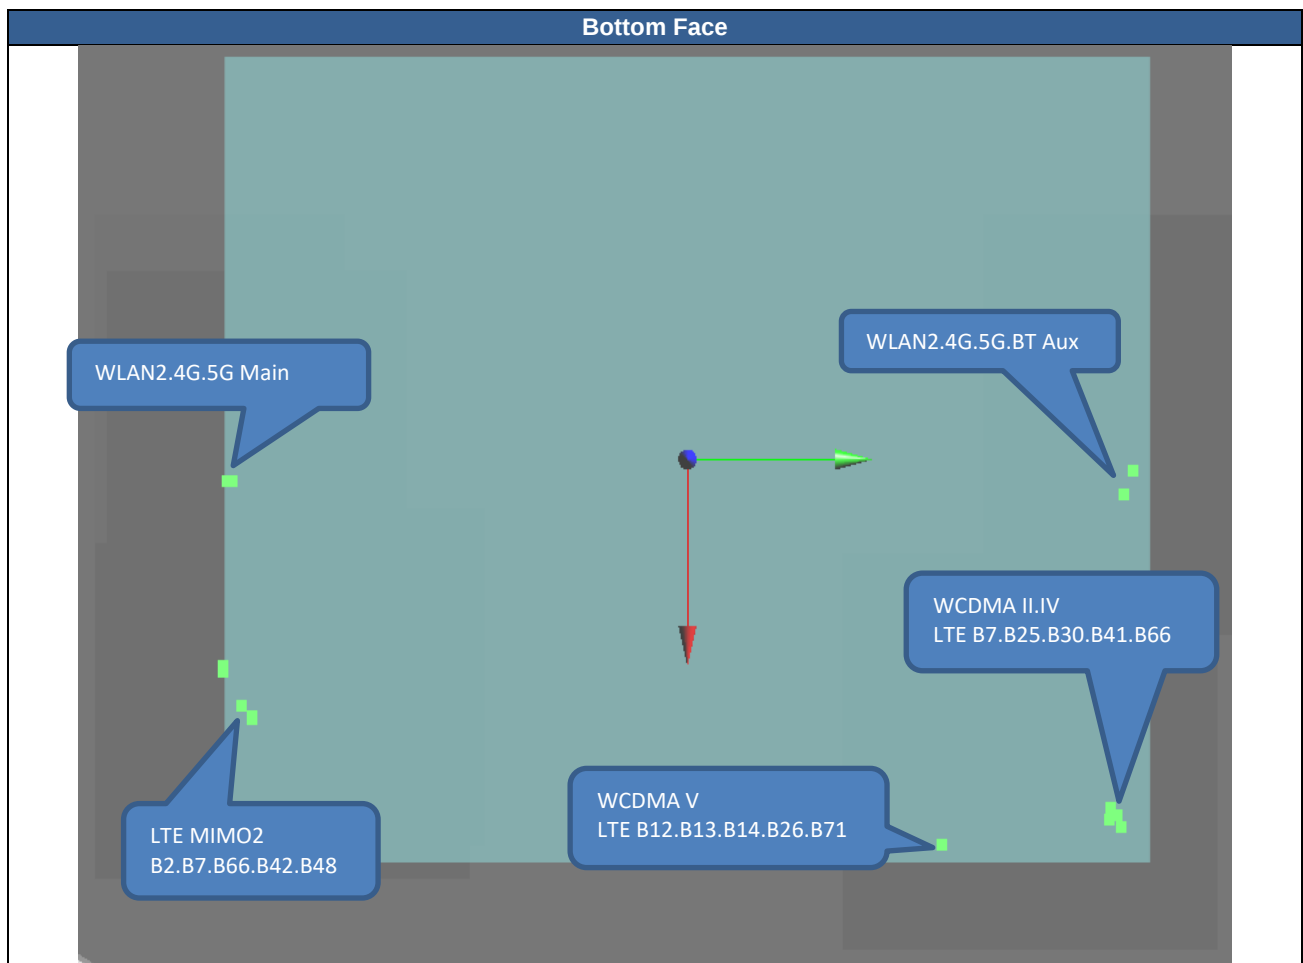

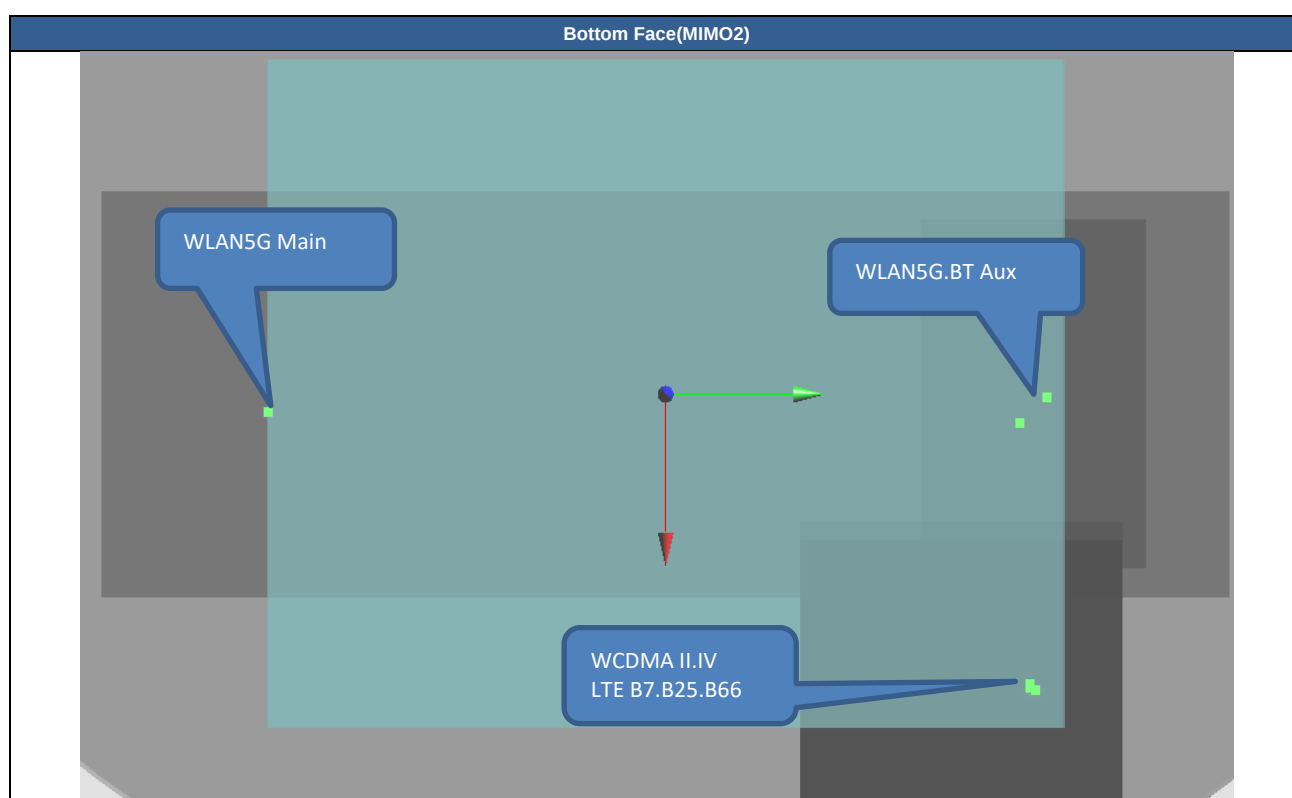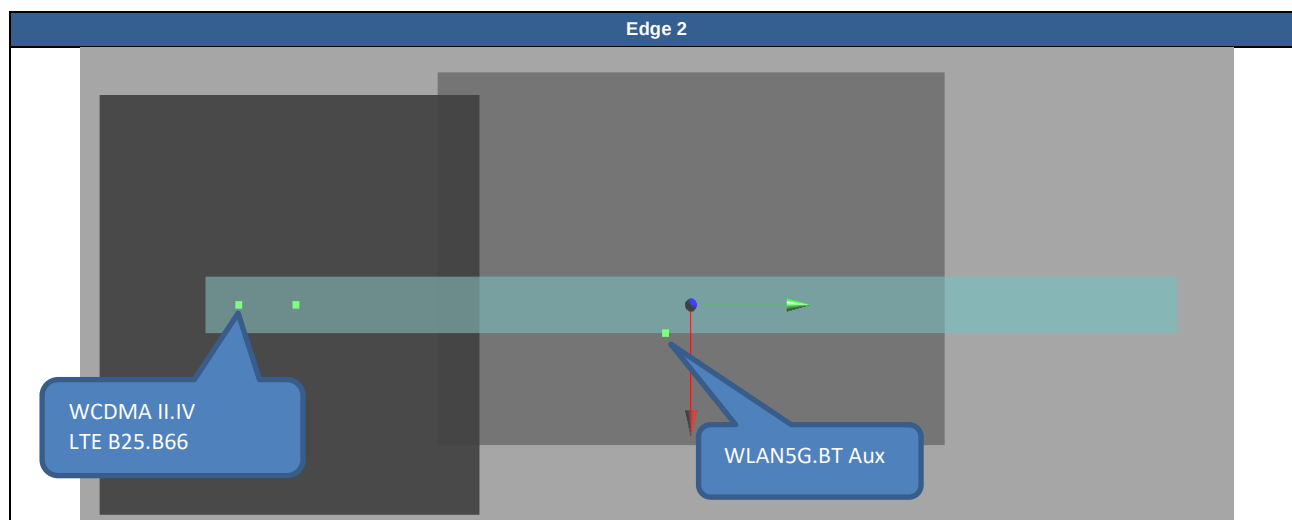

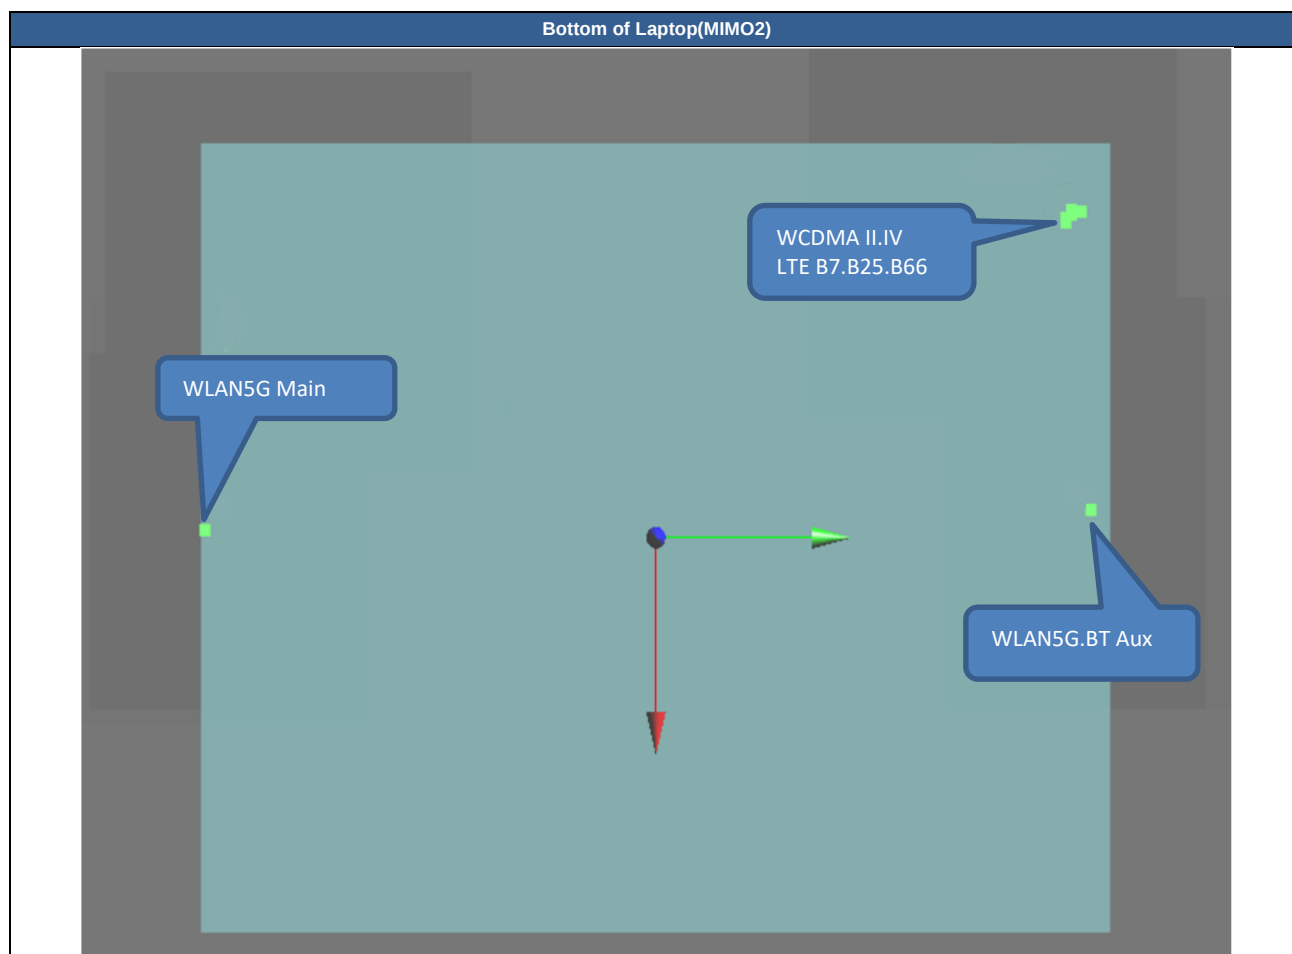

Main Antenna
<EN-DC non-Active>

	Band	Position	SAR (W/kg)	Gap	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				(mm)	X	Y	Z				
Case 1	WCDMA II	Bottom of Laptop	0.905	0mm	-94	135.5	7.47	84.3	1.69	0.03	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA II	Bottom of Laptop	0.905	0mm	-94	135.5	7.47	290.7	1.56	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.29				
	WCDMA II	Bottom of Laptop	0.905	0mm	-94	135.5	7.47	297.0	1.14	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	WCDMA II	Bottom of Laptop	0.905	0mm	-94	135.5	7.47	90.0	1.86	0.03	Not required
	WLAN5G_Ant1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 2	Band	Position	SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Bottom Face	1.107	0mm	101	137.1	7.49	99.3	2.30	0.04	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	WCDMA II	Bottom Face	1.107	0mm	101	137.1	7.49	302.1	2.03	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	WCDMA II	Bottom Face	1.107	0mm	101	137.1	7.49	297.9	1.93	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	WCDMA II	Bottom Face	1.107	0mm	101	137.1	7.49	100.6	2.62	0.04	Not required
	WLAN5G_Ant1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 3	Band	Position	SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II	Edge 2	0.39	0mm	1.6	-101.5	6	90.1	1.65	0.02	Not required
	WLAN5G_Ant1+BT_Ant1		1.263	0mm	0.4	-11.6	-0.57				
Case 4	Band	Position	SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom of Laptop	1.095	0mm	-95.5	135.5	7.46	85.8	1.88	0.03	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA IV	Bottom of Laptop	1.095	0mm	-95.5	135.5	7.46	291.1	1.75	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	WCDMA IV	Bottom of Laptop	1.095	0mm	-95.5	135.5	7.46	297.4	1.33	0.01	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	WCDMA IV	Bottom of Laptop	1.095	0mm	-95.5	135.5	7.46	91.5	2.05	0.03	Not required
	WLAN5G_Ant1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 5	Band	Position	SAR (W/kg)	Gap (mm)	X	Y	Z	3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV	Bottom Face	1.189	0mm	99.5	135.5	7.53	97.9	2.38	0.04	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	WCDMA IV	Bottom Face	1.189	0mm	99.5	135.5	7.53	300.1	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				

	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	WCDMA IV	Bottom Face	1.189	0mm	99.5	135.5	7.53	296.0	2.01	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	WCDMA IV	Bottom Face	1.189	0mm	99.5	135.5	7.53	99.6	2.70	0.04	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA IV	Edge 2	0.524	0mm	1.6	-103.8	6.01	92.4	1.79	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.263	0mm	0.4	-11.6	-0.57				
Case 7	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom of Laptop	0.945	0mm	-113.4	116.2	7.53	106.5	1.73	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	WCDMA V	Bottom of Laptop	0.945	0mm	-113.4	116.2	7.53	279.1	1.60	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	WCDMA V	Bottom of Laptop	0.945	0mm	-113.4	116.2	7.53	285.4	1.18	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	WCDMA V	Bottom of Laptop	0.945	0mm	-113.4	116.2	7.53	112.6	1.90	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA V	Bottom Face	1.093	0mm	110	81.5	7.39	125.2	2.28	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	WCDMA V	Bottom Face	1.093	0mm	110	81.5	7.39	253.8	2.01	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	WCDMA V	Bottom Face	1.093	0mm	110	81.5	7.39	249.2	1.91	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	WCDMA V	Bottom Face	1.093	0mm	110	81.5	7.39	134.6	2.61	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 9	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B2 MIMO2	Bottom of Laptop	0.37	0mm	-55.9	-141.1	7.31	286.3	1.16	0.00	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B2 MIMO2	Bottom of Laptop	0.37	0mm	-55.9	-141.1	7.31	48.5	1.03	0.02	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	LTE B2 MIMO2	Bottom of Laptop	0.37	0mm	-55.9	-141.1	7.31	51.7	0.61	0.01	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B2 MIMO2	Bottom of Laptop	0.37	0mm	-55.9	-141.1	7.31	290.9	1.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE B2 MIMO2	Bottom Face	0.689	0mm	65.4	-147.4	7.33	299.2	1.88	0.01	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				



FCC SAR TEST REPORT

Report No. : FA092423

	LTE B2 MIMO2	Bottom Face	0.689	0mm	65.4	-147.4	7.33	62.7	1.61	0.03	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B2 MIMO2	Bottom Face	0.689	0mm	65.4	-147.4	7.33	57.4	1.51	0.03	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B2 MIMO2	Bottom Face	0.689	0mm	65.4	-147.4	7.33	318.3	2.20	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7	Bottom of Laptop	0.535	0mm	-97.2	135.4	7.48	87.5	1.32	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B7	Bottom of Laptop	0.535	0mm	-97.2	135.4	7.48	291.5	1.19	0.00	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	LTE B7	Bottom of Laptop	0.535	0mm	-97.2	135.4	7.48	297.9	0.77	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B7	Bottom of Laptop	0.535	0mm	-97.2	135.4	7.48	93.2	1.49	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 12	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7	Bottom Face	1.137	0mm	104.6	135.6	7.54	103.0	2.33	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B7	Bottom Face	1.137	0mm	104.6	135.6	7.54	301.9	2.06	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B7	Bottom Face	1.137	0mm	104.6	135.6	7.54	297.7	1.96	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B7	Bottom Face	1.137	0mm	104.6	135.6	7.54	104.4	2.65	0.04	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 13	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7_MIMO2	Bottom of Laptop	0.197	0mm	-66.4	-136	7.37	283.1	0.99	0.00	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B7_MIMO2	Bottom of Laptop	0.197	0mm	-66.4	-136	7.37	59.3	0.86	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
Case 14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B7_MIMO2	Bottom Face	0.631	0mm	72.4	-142	7.36	295.5	1.82	0.01	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B7_MIMO2	Bottom Face	0.631	0mm	72.4	-142	7.36	69.9	1.55	0.03	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B7_MIMO2	Bottom Face	0.631	0mm	72.4	-142	7.36	64.5	1.45	0.03	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B7_MIMO2	Bottom Face	0.631	0mm	72.4	-142	7.36	314.5	2.15	0.01	Not required

	WLAN5G_Ant 1+BT_Ant1	Bottom Face	1.514	0mm	4.6	165	1.05	311.0	2.33	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B12	Bottom of Laptop	0.365	0mm	-96	134.7	7.47	86.4	1.15	0.01	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B12	Bottom of Laptop	0.365	0mm	-96	134.7	7.47	290.5	1.02	0.00	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	LTE B12	Bottom of Laptop	0.365	0mm	-96	134.7	7.47	296.8	0.60	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B12	Bottom of Laptop	0.365	0mm	-96	134.7	7.47	92.1	1.32	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B12	Bottom Face	1.089	0mm	111.6	79.9	7.2	127.4	2.28	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B12	Bottom Face	1.089	0mm	111.6	79.9	7.2	253.1	2.01	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B12	Bottom Face	1.089	0mm	111.6	79.9	7.2	248.4	1.91	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B12	Bottom Face	1.089	0mm	111.6	79.9	7.2	136.9	2.60	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B13	Bottom of Laptop	0.742	0mm	-113.4	114.6	7.52	106.9	1.53	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B13	Bottom of Laptop	0.742	0mm	-113.4	114.6	7.52	277.6	1.40	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.29				
	LTE B13	Bottom of Laptop	0.742	0mm	-113.4	114.6	7.52	283.9	0.98	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B13	Bottom of Laptop	0.742	0mm	-113.4	114.6	7.52	113.1	1.70	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B13	Bottom Face	1.165	0mm	110	81.5	7.45	125.2	2.35	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B13	Bottom Face	1.165	0mm	110	81.5	7.45	253.8	2.09	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B13	Bottom Face	1.165	0mm	110	81.5	7.45	249.2	1.98	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B13	Bottom Face	1.165	0mm	110	81.5	7.45	134.6	2.68	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				



FCC SAR TEST REPORT

Report No. : FA092423

	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 19	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B14	Bottom of Laptop	0.931	0mm	-113.4	114.6	7.53	106.9	1.72	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B14	Bottom of Laptop	0.931	0mm	-113.4	114.6	7.53	277.6	1.59	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	LTE B14	Bottom of Laptop	0.931	0mm	-113.4	114.6	7.53	283.9	1.17	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B14	Bottom of Laptop	0.931	0mm	-113.4	114.6	7.53	113.1	1.89	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B14	Bottom Face	1.19	0mm	110	81.5	7.46	125.2	2.38	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B14	Bottom Face	1.19	0mm	110	81.5	7.46	253.8	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B14	Bottom Face	1.19	0mm	110	81.5	7.46	249.2	2.01	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B14	Bottom Face	1.19	0mm	110	81.5	7.46	134.6	2.70	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 21	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25	Bottom of Laptop	1.032	0mm	-96.8	135.6	7.48	87.1	1.82	0.03	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B25	Bottom of Laptop	1.032	0mm	-96.8	135.6	7.48	291.6	1.69	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	LTE B25	Bottom of Laptop	1.032	0mm	-96.8	135.6	7.48	297.9	1.27	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B25	Bottom of Laptop	1.032	0mm	-96.8	135.6	7.48	92.8	1.99	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25	Bottom Face	1.124	0mm	101	135.5	7.32	99.4	2.31	0.04	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B25	Bottom Face	1.124	0mm	101	135.5	7.32	300.6	2.05	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B25	Bottom Face	1.124	0mm	101	135.5	7.32	296.4	1.94	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B25	Bottom Face	1.124	0mm	101	135.5	7.32	101.0	2.64	0.04	Not required



FCC SAR TEST REPORT

Report No. : FA092423

	WLAN5G_Ant 1+BT_Ant1	Bottom Face	1.514	0mm	4.6	165	1.05	311.0	2.33	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 23	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B25	Edge 2	0.381	0mm	1.6	-102.2	6	90.8	1.64	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		1.263	0mm	0.4	-11.6	-0.57				
Case 24	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B26	Bottom of Laptop	0.971	0mm	-114.6	114.5	7.53	108.1	1.76	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B26	Bottom of Laptop	0.971	0mm	-114.6	114.5	7.53	278.0	1.63	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	LTE B26	Bottom of Laptop	0.971	0mm	-114.6	114.5	7.53	284.3	1.21	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B26	Bottom of Laptop	0.971	0mm	-114.6	114.5	7.53	114.2	1.93	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 25	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B26	Bottom Face	1.168	0mm	110	81.5	7.41	125.2	2.36	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B26	Bottom Face	1.168	0mm	110	81.5	7.41	253.8	2.09	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant2	Bottom Face	0.921	0mm	3	-148.6	1.84	289.5	1.42	0.01	Not required
	BT_Ant1		0.494	0mm	11.6	140.8	1.05				
	LTE B26	Bottom Face	1.168	0mm	110	81.5	7.41	249.2	1.99	0.01	Not required
	WLAN5G_Ant2		0.819	0mm	8.4	-146	0.81				
	LTE B26	Bottom Face	1.168	0mm	110	81.5	7.41	134.6	2.68	0.03	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
	WLAN5G_Ant2	Bottom Face	0.819	0mm	8.4	-146	0.81	311.0	2.33	0.01	Not required
	WLAN5G_Ant 1+BT_Ant1		1.514	0mm	4.6	165	1.05				
Case 26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B30	Bottom of Laptop	0.681	0mm	-98.2	137.8	7.39	88.4	1.47	0.02	Not required
	WLAN2.4G_Ant1		0.789	0mm	-10.2	141.4	0.21				
	LTE B30	Bottom of Laptop	0.681	0mm	-98.2	137.8	7.39	294.1	1.34	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant1	Bottom of Laptop	0.789	0mm	-10.2	141.4	0.21	283.4	1.45	0.01	Not required
	WLAN2.4G_Ant2		0.659	0mm	-7.6	-142	3.07				
	WLAN2.4G_Ant2	Bottom of Laptop	0.659	0mm	-7.6	-142	3.07	287.2	1.02	0.00	Not required
	BT_Ant1		0.365	0mm	-4.8	145.2	0.029				
	LTE B30	Bottom of Laptop	0.681	0mm	-98.2	137.8	7.39	300.5	0.92	0.00	Not required
	WLAN5G_Ant2		0.238	0mm	-5.2	-147.8	-0.07				
	LTE B30	Bottom of Laptop	0.681	0mm	-98.2	137.8	7.39	94.0	1.64	0.02	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
	WLAN5G_Ant2	Bottom of Laptop	0.238	0mm	-5.2	-147.8	-0.07	293.0	1.20	0.00	Not required
	WLAN5G_Ant 1+BT_Ant1		0.959	0mm	-4.8	145.2	0.29				
Case 27	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE B30	Bottom Face	1.158	0mm	110	81.5	7.41	125.2	2.35	0.03	Not required
	WLAN2.4G_Ant1		1.189	0mm	2.2	145	1.81				
	LTE B30	Bottom Face	1.158	0mm	110	81.5	7.41	253.8	2.08	0.01	Not required
	WLAN2.4G_Ant2		0.921	0mm	3	-148.6	1.84				
	WLAN2.4G_Ant1	Bottom Face	1.189	0mm	2.2	145	1.81	293.6	2.11	0.01	Not required