



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
SMARTPHONE

**FCC ID: BCG-E8140A
Model Name: A2650**

**Report Number: 14040863-S1V5
Issue Date: 7/20/2022**

Prepared for
**APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



Revision History

Rev.	Date	Revisions	Revised By
V1	7/1/2022	Initial Issue	--
V2	7/7/2022	1. Updated section 1 reported SAR. 2. Updated section 9.1, 9.3, 9.4, 9.6, and 9.7. 3. Updated section 10.24, 10.25, and 10.35. 4. Updated section 12.	Devin Chang
V3	7/13/2022	1. Updated section 6.1 - UWB frequencies 2. Updated section 12 - Added note at end of section 3. Updated section 10.25 – Updated table. 4. Updated Section 10.38 – Updated table Appendix J: Added MSS Time Averaged SAR	Dave Weaver
V4	7/15/2022	1. Updated section 8, 9.10, 10.38, 12.2, and 12.4. Appendix C, F and, J: Updated.	Devin Chang
V5	7/20/2022	Updated section 9.8	Devin Chang

Table of Contents

1.	Attestation of Test Results	6
2.	Test Specification, Methods and Procedures.....	7
3.	Facilities and Accreditation	8
4.	SAR Measurement System & Test Equipment	9
4.1.	SAR Measurement System.....	9
4.2.	SAR Scan Procedures.....	10
4.3.	Test Equipment.....	12
5.	Measurement Uncertainty.....	15
6.	Device Under Test (DUT) Information	16
6.1.	DUT Description	16
6.2.	Wireless Technologies.....	17
6.3.	General LTE SAR Test and Reporting Considerations.....	19
6.4.	LTE (TDD) Considerations.....	22
6.5.	General 5G NR(FR1) SAR Test and Reporting Considerations	23
6.6.	Time-Average Feature	26
7.	RF Exposure Conditions (Test Configurations)	30
8.	Dielectric Property Measurements & System Check	31
8.1.	Dielectric Property Measurements	31
8.2.	System Check.....	55
9.	Conducted Output Power Measurements.....	65
9.1.	GSM	65
9.2.	W-CDMA	68
9.3.	LTE.....	81
9.4.	LTE Up-Link Carrier Aggregation.....	159
9.5.	LTE Down-Link Carrier Aggregation	169
9.6.	5G NR(FR1)	170
9.7.	Wi-Fi 2.4GHz (DTS Band)	217
9.8.	Wi-Fi 5GHz (U-NII Bands).....	219
9.9.	Bluetooth	222
9.10.	MSS (Mobile Satellite Service)	224
10.	Measured and Reported (Scaled) SAR Results.....	225
10.1.	GSM850.....	226
10.2.	GSM1900.....	227

10.3.	W-CDMA Band 2.....	228
10.4.	W-CDMA Band 4.....	229
10.5.	W-CDMA Band 5.....	230
10.6.	LTE Band 5 (10MHz Bandwidth)	231
10.7.	LTE Band 7 (20MHz Bandwidth)	232
10.8.	LTE Band 12 (10MHz Bandwidth)	235
10.9.	LTE Band 13 (10MHz Bandwidth)	236
10.10.	LTE Band 14 (10MHz Bandwidth)	237
10.11.	LTE Band 25 (20MHz Bandwidth)	238
10.12.	LTE Band 26 (10MHz Bandwidth)	240
10.13.	LTE Band 30 (10MHz Bandwidth)	241
10.14.	LTE Band 41 Power Class 3 (20MHz Bandwidth).....	243
10.15.	LTE Band 41 Power Class 2 (20MHz Bandwidth).....	246
10.16.	LTE Band 48 (20MHz Bandwidth)	247
10.17.	LTE Band 53 (10MHz Bandwidth)	250
10.18.	LTE Band 66 (20MHz Bandwidth)	251
10.19.	LTE Band 71 (20MHz Bandwidth)	253
10.20.	5G NR Band n5 (20MHz Bandwidth)	254
10.21.	5G NR Band n7 (40MHz Bandwidth)	255
10.22.	5G NR Band n12 (15MHz Bandwidth)	256
10.23.	5G NR Band n14 (10MHz Bandwidth)	257
10.24.	5G NR Band n25 (40MHz Bandwidth)	258
10.25.	5G NR Band n26 (10MHz Bandwidth)	259
10.26.	5G NR Band n30 (10MHz Bandwidth)	260
10.27.	5G NR Band n41 (100MHz Bandwidth)	262
10.28.	5G NR Band n41 Power Class 2 (100MHz Bandwidth)	263
10.29.	5G NR Band n53 (10MHz Bandwidth)	264
10.30.	5G NR Band n66 (40MHz Bandwidth)	265
10.31.	5G NR Band n70 (15MHz Bandwidth)	267
10.32.	5G NR Band n71 (20MHz Bandwidth)	268
10.33.	5G NR Band n77 (Block A)(100MHz Bandwidth).....	269
10.34.	5G NR Band n77 (Block C)(100MHz Bandwidth)	270
10.35.	Wi-Fi (DTS Band).....	271
10.36.	Wi-Fi (U-NII Band).....	272
10.37.	Bluetooth.....	274
10.38.	MSS (Mobile Satellite Service)	275
11.	SAR Measurement Variability.....	276

12. Simultaneous Transmission Conditions	277
12.1. Sum of the SAR for WWAN Cell-off & Wi-Fi & BT results	279
12.2. Sum of the SAR for WWAN(TNE) Cell-on ANT1 & Wi-Fi & BT results.....	279
12.3. Sum of the SAR for WWAN(TNE) Cell-on ANT2 & Wi-Fi & BT results.....	280
12.4. Sum of the SAR for WWAN(TNE) Cell-on ANT4 & Wi-Fi & BT results.....	280
12.5. Sum of the SAR for WWAN(PCE) Cell-on ANT1 & Wi-Fi & BT results	281
12.6. Sum of the SAR for WWAN(PCE) Cell-on ANT2 & Wi-Fi & BT results	281
12.7. Sum of the SAR for WWAN(PCE) Cell-on ANT3 & Wi-Fi & BT results	282
12.8. Sum of the SAR for WWAN(PCE) Cell-on ANT4 & Wi-Fi & BT results	282
12.9. Sum of the SAR for WWAN(PCE) Cell-on ANT7 & Wi-Fi & BT results	283
12.10. Sum of the SAR for WWAN(PCE) Cell-on ANT8 & Wi-Fi & BT results	283
12.11. Sum of the SAR for WWAN(PCE) Cell-on ANT9 & Wi-Fi & BT results	284
12.12. Sum of the SAR for WWAN(CBE) Cell-on ANT4 & Wi-Fi & BT results	284
12.13. Sum of the SAR for WWAN(CBE) Cell-on ANT7 & Wi-Fi & BT results	285
12.14. Sum of the SAR for WWAN(CBE) Cell-on ANT8 & Wi-Fi & BT results	285
12.15. Sum of the SAR for WWAN(CBE) Cell-on ANT9 & Wi-Fi & BT results	286
Appendixes	287
Appendix A: SAR Setup Photos	287
Appendix B: SAR System Check Plots	287
Appendix C: SAR Highest Test Plots.....	287
Appendix D: SAR Tissue Ingredients.....	287
Appendix E: SAR Probe Certificates.....	287
Appendix F: SAR Dipole Certificates	287
Appendix G: LTE Down-Link Carrier Aggregation.....	287
Appendix H: Body Detect Validation	287
Appendix I: Wi-Fi Time-Averaged SAR(TAS)	287
Appendix J: MSS Time Averaged SAR.....	287

1. Attestation of Test Results

Applicant Name		APPLE INC.					
FCC ID		BCG-E8140A					
Model Name		A2650					
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013					
Exposure Category		SAR Limits (W/Kg)					
		Peak spatial average (1g of tissue)			Extremities (hands, wrists, ankles, etc.) (10g of tissue)		
General population / Uncontrolled exposure		1.6			4		
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)					
		TNE	PCE	CBE	DTS	NII	DSS
Head		0.894	0.947	0.943	1.133	1.149	1.030
Body-worn (Dist.= 5 mm)		0.752	0.949	0.891	1.063	1.147	0.797
Hotspot (Dist.= 5 mm)		1.020	0.949	0.945	1.141	1.147	1.066
Simultaneous TX	Head	1.279	1.366	1.327	1.341	1.464	1.464
	Body-worn	1.286	1.482	1.425	1.421	1.495	1.495
	Hotspot	1.566	1.492	1.470	1.566	1.495	1.495
Date Tested		5/15/2022 to 7/15/2022					
Test Results		Pass					

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released By:	Prepared By:
	
Devin Chang Senior Test Engineer UL Verification Services Inc.	Chakrit Thammanavarat Senior Test Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure **KDB** procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- **TCB workshop** October 2014; RF Exposure Procedures (Other LTE Considerations)
- **TCB workshop** April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- **TCB workshop** October 2015; RF Exposure Procedures (KDB 941225 D05A)
- **TCB workshop** April 2016; RF Exposure Procedures (LTE Carrier Aggregation for DL)
- **TCB workshop** October 2016; RF Exposure Procedures (LTE Carrier Aggregation for UL)
- **TCB workshop** October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- **TCB workshop** October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- **TCB workshop** May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- **TCB workshop** May 2017; RF Exposure Procedures (LTE Band 41 Power Class 2)
- **TCB workshop** November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)
- **TCB workshop** April 2018; RF Exposure Procedures (LTE DL CA SAR Test Exclusion)
- **TCB workshop** October 2018; RF Exposure Procedures (LTE Inter-Band Uplink Carrier Aggregation –Interim Procedures)
- **TCB workshop** April 2019; RF Exposure Procedures (802.11ax SAR Testing)
- **TCB workshop** November 2019; RF Exposure Policy Updates (5G NR FR1 NSA EN-DCUE SAR Evaluations)
- **TCB workshop** April 2021; RF Exposure Procedures (Remarks on Test Reductions via Data Referencing for Closely Related Products)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47173 Benicia Street	47266 Benicia Street	5440 Patrick Henry Drive
SAR Lab A	SAR Lab 1	PHD 30A
SAR Lab B	SAR Lab 2	PHD 30B
SAR Lab C	SAR Lab 3	
SAR Lab D	SAR Lab 4	
SAR Lab E	SAR Lab 5	
SAR Lab F	SAR Lab 6	
SAR Lab G	SAR Lab 8	
SAR Lab H	SAR Lab 9	
	SAR Lab 10	
	SAR Lab 11	
	SAR Lab 12	
	SAR Lab 13	
	SAR Lab 14	
	SAR Lab 15	
	SAR Lab 16	

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05


The Test Lab Conformity Assessment Body Identifier (CABID)

Location	CABID	Company Number
47173 Benicia Street, Fremont, CA, 94538 UNITED STATES	US0104	2324A
47266 Benicia Street, Fremont, CA, 94538 UNITED STATES		22541
5440 Patrick Henry Drive, Santa Clara, CA, 95054 UNITED STATES		27500

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

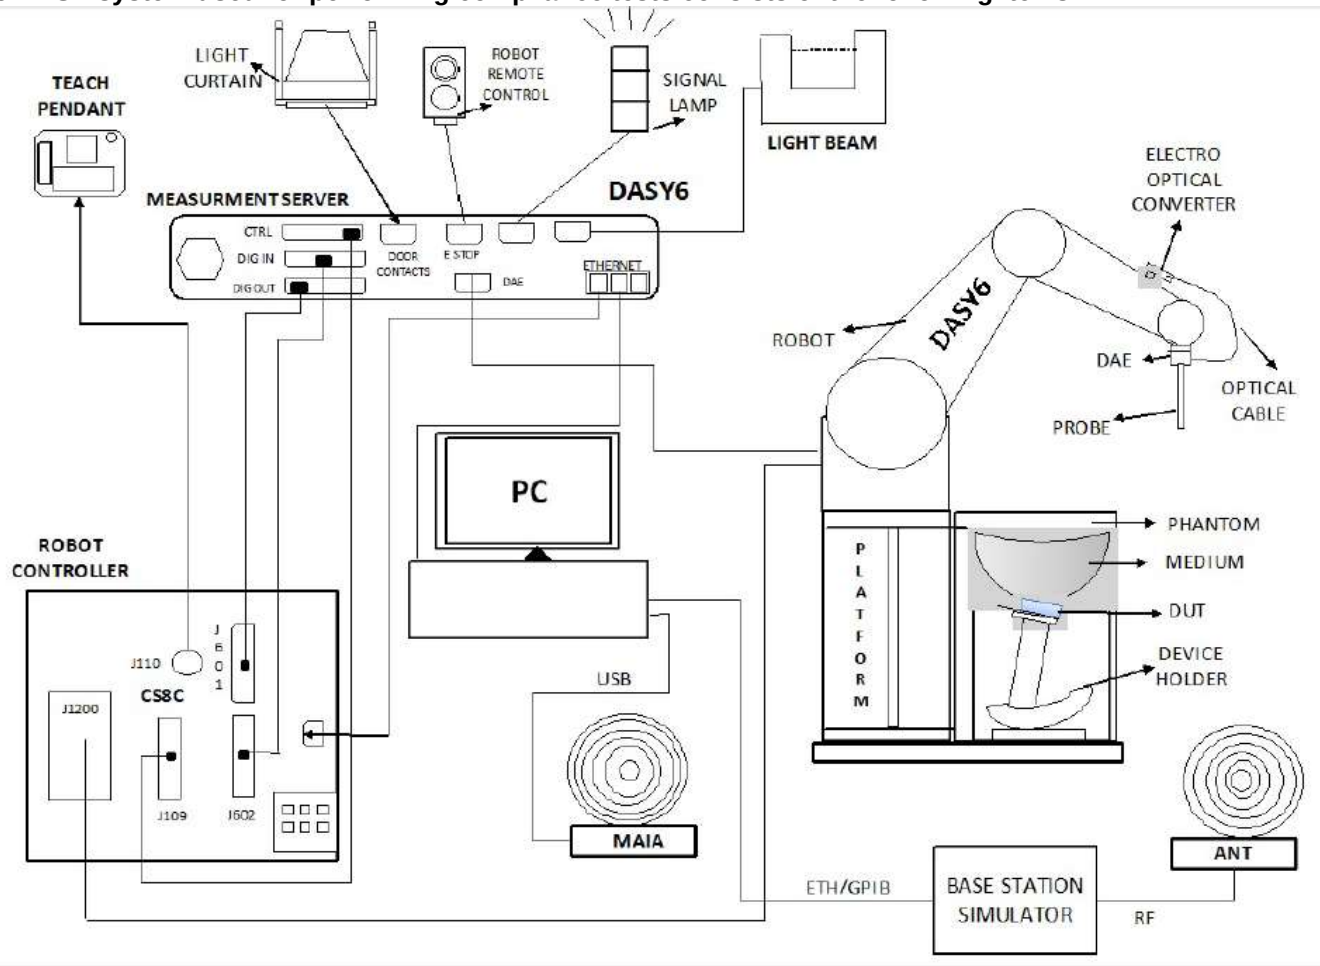

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7, Win10 and the DASY52¹ and DASY6² software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY52 software used: DASY52.10.4 & S 14.6.14 and older generations.

² DASY6 software used: DASY6.14 & S 14.6.14 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Std 1528-2013, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	R&S	ZNLE6	171919	2/18/2023
Dielectric Probe Kit	SPEAG	DAK 3.5mm Probe	80345	11/16/2023
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/16/2023
Thermometer	Fisher Scientific	Z540	T1130	8/1/2022
Network Analyzer	R&S	ZNLE6	13230012K56-101274-mn	2/15/2023
Dielectric Probe Kit	SPEAG	DAK 3.5mm Probe	1082	9/19/2022
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	9/19/2022
Thermometer	Fisher Scientific	Z540	170064398	9/1/2022
Vector Reflectometer	Copper Mountain	DAKS VNA R140	170514	4/25/2023
Dielectric Probe Kit	Speag	DAK 3.5mm Probe	SM DAK 520 AA	3/9/2023
Shorting Block	Speag	DAK-3.5 Short	SM DAK 200 CA	3/9/2023
Thermometer	Traceable	4353	221312857	3/3/2024

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	1/26/2023
Power Meter	Keysight	N1912a	MY55196007	1/25/2023
Power Sensor	Agilent	N1921A	MY52270022	1/25/2023
Power Sensor	Agilent	N1921A	MY5220012	1/25/2023
Amplifier	Miteq	147117-1E	1795093	N/A
Directional Coupler	SMA	C8060-102	2717	N/A
DC Power Supply	Sorensen	XT15-4	1817A02680	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140630	1/25/2023
Power Meter	Agilent	N1912A	MY50001018	1/25/2023
Power Sensor	Agilent	N1921A	MY53260010	2/3/2023
Power Sensor	Agilent	N1921A	MY5226009	1/25/2023
Amplifier	Miteq	1795092	147117-1E	N/A
Directional Coupler	SMA	C8050-102	4062	N/A
DC Power Supply	H/P	6296A	2841A-05955	N/A
Synthesized Signal Generator	R&S	SMB 100A	1406-6000K03-180970-zC	2/16/2023
Power Meter	HP	437B	3125U11364	1/25/2023
Power Sensor	HP	8481A	HA2022C004446	1/25/2023
Power Sensor	R&S	NRP50S	1419 0087K02-101250-pe	2/16/2023
Synthesized Signal Generator	R&S	SMB 100A	1406 600K03-180968-Gx	2/18/2023
Power Meter	HP	437B	HA2022C004449	1/25/2023
Power Sensor	HP	8481A	HA2022C004445	1/25/2023
Power Sensor	R&S	NRP18A	1424 6815K02-100992-iu	2/19/2023
Synthesized Signal Generator	Rohde & Schwarz	SMB 100A	1406.6000K03-180969-Yc	2/16/2023
Power Meter	Keysight	N1911A	MY55196015	1/26/2023
Power Sensor	Agilent	N1921A	MY53260001	1/25/2023
Power Sensor	Rohde & Schwarz	NRP18A	1424.6815K02-100994-RE	2/19/2023
Directional Coupler	Werlatone	C8060-102	2710	N/A
Synthesized Signal Generator	R & S	SMU 200A	102448	7/15/2023
Power Meter	R & S	NRP2	102818-pb	7/25/2022
Power Sensor	R & S	NRP-Z81	106316-XJ	8/28/2022
Amplifier	AR	20S1G4M4	337209	N/A
Directional Coupler	Krytar	158010	142255	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab A)	SPEAG	EX3DV4	7501	3/25/2023
E-Field Probe (SAR Lab B)	SPEAG	EX3DV4	7498	3/24/2023
E-Field Probe (SAR Lab C)	SPEAG	EX3DV4	7500	3/25/2023
E-Field Probe (SAR Lab D)	SPEAG	EX3DV4	7587	4/27/2023
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3885	9/23/2022
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3749	11/16/2023
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	7585	4/27/2023
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	7448	2/25/2023
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3991	8/20/2022
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	7569	4/26/2023
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	7356	3/24/2023
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3929	3/23/2023
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3990	2/25/2023
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	3773	2/28/2023
E-Field Probe (SAR Lab 10)	SPEAG	EX3DV4	3989	1/19/2023
E-Field Probe (SAR Lab 11)	SPEAG	EX3DV4	7482	4/26/2023
E-Field Probe (SAR Lab 12)	SPEAG	EX3DV4	3686	1/18/2023
E-Field Probe (SAR Lab 13)	SPEAG	EX3DV4	7589	4/28/2023
E-Field Probe (30A)	SPEAG	EX3DV4	3988	10/27/2022
E-Field Probe (30B)	SPEAG	EX3DV4	3785	10/27/2022
Data Acquisition Electronics (SAR Lab A)	SPEAG	DAE4	1546	3/22/2023
Data Acquisition Electronics (SAR Lab B)	SPEAG	DAE4	1258	3/22/2023
Data Acquisition Electronics (SAR Lab C)	SPEAG	DAE4	1545	3/23/2023
Data Acquisition Electronics (SAR Lab D)	SPEAG	DAE4	1239	8/11/2022
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1377	9/20/2022
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1257	9/15/2022
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1472	1/7/2023
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1544	1/7/2023
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1359	1/7/2023
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1434	11/11/2022
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1540	1/11/2023
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1433	2/23/2023
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1621	4/21/2023
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1352	11/9/2022
Data Acquisition Electronics (SAR Lab 10)	SPEAG	DAE4	1547	4/21/2023
Data Acquisition Electronics (SAR Lab 11)	SPEAG	DAE4	1548	2/23/2023
Data Acquisition Electronics (SAR Lab 12)	SPEAG	DAE4	1380	8/11/2022
Data Acquisition Electronics (SAR Lab 13)	SPEAG	DAE4	1263	11/12/2022
Data Acquisition Electronics (30A)	SPEAG	DAE4	1412	10/11/2022
Data Acquisition Electronics (30B)	SPEAG	DAE4	1278	10/12/2022

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
System Validation Dipole	SPEAG	D750V3	1019	4/26/2023
System Validation Dipole	SPEAG	D750V3	1022	5/2/2023
System Validation Dipole	SPEAG	D750V3	1071	11/24/2022
System Validation Dipole	SPEAG	D835V2	4d142	8/10/2022
System Validation Dipole	SPEAG	D835V2	4d076	5/2/2023
System Validation Dipole	SPEAG	D900V2	1d143	9/29/2022
System Validation Dipole	SPEAG	D1640V2	324	3/8/2023
System Validation Dipole	SPEAG	D1750V2	1050	4/27/2023
System Validation Dipole	SPEAG	D1750V2	1053	9/29/2022
System Validation Dipole	SPEAG	D1750V2	1077	9/29/2022
System Validation Dipole	SPEAG	D1900V2	5d140	4/28/2023
System Validation Dipole	SPEAG	D1900V2	5d163	9/29/2022
System Validation Dipole	SPEAG	D1950V3	1136	4/28/2023
System Validation Dipole	SPEAG	D2300V2	1002	4/25/2023
System Validation Dipole	SPEAG	D2300V2	1058	9/29/2022
System Validation Dipole	SPEAG	D2450V2	706	1/13/2023
System Validation Dipole	SPEAG	D2450V2	748	2/22/2023
System Validation Dipole	SPEAG	D2600V2	1006	9/29/2022
System Validation Dipole	SPEAG	D2600V2	1036	4/25/2023
System Validation Dipole	SPEAG	D3500V2	1060	2/25/2023
System Validation Dipole	SPEAG	D3500V2	1011	4/21/2023
System Validation Dipole	SPEAG	D3700V2	1039	5/6/2023
System Validation Dipole	SPEAG	D3900V2	1052	9/16/2022
System Validation Dipole	SPEAG	D5GHzV2	1168	11/24/2022
System Validation Dipole	SPEAG	D5GHzV2	1138	8/19/2022
System Validation Dipole	SPEAG	D5GHzv2	1003	2/23/2023

Note(s):

*Equipment not used past calibration due date.

OTHER

Name of Equipment	Manufacturer	Type/Model	T Number	Serial No.	Cal. Due Date
Wideband Radio Communication Tester	R&S	CMW 500	85940	137877	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	85719	135390	2/20/2023
Wideband Radio Communication Tester	R&S	CMW 500	80580	132910	2/19/2023
Wideband Radio Communication Tester	R&S	CMW 500	85698	135393	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	81849	124594	2/18/2023
Wideband Radio Communication Tester	R&S	CMW 500	85348	125236	2/15/2023
Wideband Radio Communication Tester	R&S	CMW 500	209235	170415	2/22/2023
Wideband Radio Communication Tester	R&S	CMW 500	208643	170416	2/15/2023
Wideband Radio Communication Tester	R&S	CMW 500	85789	137873	2/16/2023
Wideband Radio Communication Tester	R&S	CMW 500	85781	135384	2/16/2023
Wideband Radio Communication Tester	R&S	CMW 500	85763	134852	2/20/2023
Wideband Radio Communication Tester	R&S	CMW 500	85727	134854	2/21/2023
Wideband Radio Communication Tester	R&S	CMW 500	86119	137875	2/17/2023
Power Meter	Keysight Technologies	N1912A	N/A	MY55196007	1/25/2023
Power Sensor	Agilent	N1921A	N/A	MY52270022	1/25/2023
Power Meter	Keysight Technologies	N1912A	N/A	MY55196004	1/26/2023
Power Sensor	Agilent	N1921A	N/A	MY53020038	3/2/2023

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

The Apple iPhone is a smartphone with multimedia functions (music, application support, and video), cellular GSM, GPRS, EGPRS, UMTS, LTE, 5G, IEEE 802.11a/b/g/n/ac/ax, Bluetooth, Ultra-Wideband, GPS, NFC and MSS. All models except reference model support at least one UICC based SIM. The second SIM is either an UICC based p-SIM (physical SIM) or e-SIM (electronic SIM). The device supports a built-in inductive charging transmitter and receiver. The rechargeable battery is not user accessible.

All Models have the same PCB layout, circuit design, common components, antennas and antenna locations. Their cellular modem, Wi-Fi, BT, NFC, WPT, UWB and MSS transmitters are identical.

The device utilizes two power modes: Mode A(DSI=0) and Mode B(DSI=1). Power selection is determined by the device's positioning and use case as described in Sec. 10. Mode A power is used when the device is used against the user's head, or away from the body. Mode B is used when the device is used in a body-worn configuration by the user.

The WWAN transmit antenna switching mechanism between WWAN antennas is implemented with a physical "break-before-make" switch so that only one antenna can be used for WWAN transmission at one time.

In Airplay mode, the device uses same power and power control mechanism as Wi-Fi. Airplay is not supported in hotspot mode. Airplay utilize the same 802.11 modes, modulation, MIMO, Channel Bandwidth, etc. as Wi-Fi does. Therefore, Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

There are three vendors of the Wi-Fi/Bluetooth radio modules: variant 1, 2, and 3. The Wi-Fi/BT radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. It is confirmed that Variant 1 represents the worst case.

This product utilizes a time-averaged power control mechanism – Wi-Fi Time-Averaged SAR(TAS) within the Wi-Fi chipset – that ensures total power across all Wi-Fi transmitters does not exceed applicable regulatory limits. For further details, refer to the technical description document and Appendix I.

Device Dimension	Overall (Length x Width): 147.46 mm x 71.45 mm Overall Diagonal: 163.83 mm (6.45 inch) Display Diagonal: 155.45 mm (6.12 inch)
Back Cover	The Back Cover is not removable
Battery Options	The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its WWAN data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot Wi-Fi 5.2(UNII-1)/5.8 GHz(UNII-3)
AirPlay	AirPlay mode enabled devices transfer data directly between each other ☒ AirPlay (Wi-Fi 2.4 GHz) ☒ AirPlay (Wi-Fi 5 GHz)
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. ☒ BT Tethering (Bluetooth 2.4 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 10 - 2 Up, 4 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25%
		Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No		
W-CDMA (UMTS)	Band 2 Band 4 Band 5	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7) DC-HSDPA (Rel. 8)		100%
LTE ⁴	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 14 FDD Band 17 FDD Band 25 FDD Band 26 FDD Band 29 (DL Only) FDD Band 30 TDD Band 41 ² TDD Band 46 (DL Only) TDD Band 48 TDD Band 53 FDD Band 66 FDD Band 71 Carrier Aggregation ³ FDD Band 5B FDD Band 7C TDD Band 41C ² TDD Band 48C	QPSK 16QAM 64QAM 256QAM Carrier Aggregation (2 Uplinks and 6 Downlinks)		100% (FDD) 63.3% (TDD) Power Class 3 43.3% (TDD) Power Class 2 Refer to §6.4
		Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No		
5G NR (FR1)	FDD band n2 FDD band n5 FDD band n7 FDD band n12 FDD band n14 FDD band n25 FDD band n26 FDD band n29 (DL Only) FDD band n30 TDD band n41 ² TDD band n53 FDD band n66 FDD band n70 FDD band n71 TDD band n77 ²	CP-OFDM: Pi/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM DFT-s-OFDM: QPSK, 16QAM, 64QAM, 256QAM		100% (FDD) 100% (TDD) Power Class 3 50% (TDD) Power Class 2
Wi-Fi	2.4 GHz ¹	802.11b 802.11g 802.11n (HT20) 802.11ac (HT20) 802.11ax (HE20)		98.86% (802.11b)
	5 GHz ¹	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		97.62% (802.11a/n/ac 20MHz BW) 95.57% (802.11n/ac/ax 40MHz BW) 95.43% (802.11n/ac/ax 80MHz BW)

		802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80)	
		Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No	
		Does this device support Band gap channel(s)? ☒ Yes ☐ No	
Bluetooth	2.4 GHz	BR, EDR, LE, and HDR	100%
NFC ⁵	13.56 MHz	Type A/B/F and ISO15693	N/A
UWB ⁵ (Ultra-Wideband)	6.5 GHz and 8 GHz	BPM-BPSK	N/A
MSS (Mobile Satellite Service)	1610 – 1626.5 MHz	1-PRB SC-FDMA	100%

Note(s):

1. Duty cycle for Wi-Fi and BT is referenced from the DTS and U-NII and BT reports.
2. This device supports Power Class 2 and Power Class 3.
3. LTE Uplink 2CA is the total combined power of the UL CA.
4. LTE Uplink Cat 13, LTE 3GPP Rel-13 (LTE 3GPP Rel-14 for B41 PC2)
5. UWB and NFC RF exposure testing is categorically excluded.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz (BW = 70 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12	Frequency range: 699 – 716 MHz (BW = 17 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			23230/ 782	23230/ 782		
	High				23255/ 784.5		
	Band 14	Frequency range: 788 - 798 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz
	Low				23305/ 790.5		
	Mid			23330/ 793	23330/ 793		
	High				23355/ 794.5		

					795.5		
Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz	
Low			23780/ 709	23755/ 706.5			
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			
Band 25	Frequency range: 1850 - 1915 MHz (BW = 65 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7	
Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	
High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3	
Band 26	Frequency range: 814 - 849 MHz (BW = 35 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7	
Mid			26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	
High			26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3	
Band 30	Frequency range: 2305 - 2315 MHz (BW = 10 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz ¹	5 MHz ¹	3 MHz	1.4 MHz	
Low				27685/ 2307.5			
Mid			27710/ 2310	27710/ 2310			
High				27735/ 2312.5			
Band 41 ²	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	39750 / 2506.0						
Low-Mid	40185 / 2549.5						
Mid	40620 / 2593.0						
Mid-High	41055 / 2636.5						
High	41490 / 2680.0						
Band 48	Frequency range: 3550 - 3700 MHz (BW = 150 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	55340/ 3560	55315/ 3557.5	55290/ 3555	55265/ 3552.5			
Mid-Low	55773/ 3603.3	55765/ 3602.5	55757/ 3601.7	55748/ 3600.8			
Mid-High	56207/ 3646.7	56215/ 3647.5	56223/ 3648.3	56232/ 3649.2			
High	56640/ 3690	56665/ 3692.5	56690/ 3695	56715/ 3697.5			
Band 53	Frequency range: 2483.5 - 2495 MHz (BW = 11.5 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low					2485/ 60115	2484.2/ 60147	
Mid			60197/ 2489.5	60197/ 2489.5	60197/ 2489.5	60197/ 2489.5	
High					2493.5/ 60240	2494.3/ 60248	

	Band 66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7																																																													
	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745																																																													
	High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3																																																													
	Band 71	Frequency range: 663 - 698 MHz (BW = 35 MHz)																																																																		
		Channel Bandwidth																																																																		
		20 MHz ¹	15 MHz ¹	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low	133222/ 673	133197/ 670.5	133172/ 668	133147/ 665.5																																																															
	Mid	133297/ 680.5	133297/ 680.5	133297/ 680.5	133297/ 680.5																																																															
	High	133372/ 688	133397/ 690.5	133422/ 693	133447/ 695.5																																																															
LTE transmitter and antenna implementation	LTE can transmit from either ANT1, ANT2, ANT3, ANT4, ANT7, ANT8, and ANT9 Then antenna switching is implemented with a physical, "break-before-make" switch such that only one antenna can be used for LTE transmission at a time.																																																																			
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing						Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})							MPR (dB)																																																												
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																														
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																													
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																													
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																													
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																													
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																													
256 QAM	≥ 1						≤ 5																																																													
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																			

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3%(Power Class 3) and configuration 1 at 43.3%(Power Class 2) duty cycle.

6.5. General 5G NR(FR1) SAR Test and Reporting Considerations

n2	SCS (kHz)	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15										372000 /1860	371500 /1857.5	371000 /1855	370500 /1852.5	
Mid	15										376000 /1880	376000 /1880	376000 /1880	376000 /1880	
High	15										380000 /1900	380500 /1902.5	381000 /1905	381500 /1907.5	
n5	SCS (kHz)	Frequency range: 824 - 849 MHz (BW = 25 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15										166800 /834	166300 /831.5	165800 /829	165300 /826.5	
Mid	15										167300 /836.5	167300 /836.5	167300 /836.5	167300 /836.5	
High	15										167800 /839	168300 /841.5	168800 /844	169300 /846.5	
n7	SCS (kHz)	Frequency range: 2500 - 2570 MHz (BW = 70 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15							504000 /2520	503000 /2515	502500 /2512.5	502000 /2510	501500 /2507.5	501000 /2505	500500 /2502.5	
Mid	15							507000 /2535	507000 /2535	507000 /2535	507000 /2535	507000 /2535	507000 /2535	507000 /2535	
High	15							510000 /2550	511000 /2555	511500 /2557.5	512000 /2560	512500 /2562.5	513000 /2565	513500 /2567.5	
n12	SCS (kHz)	Frequency range: 699 - 716 MHz (BW = 17 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15											141300 /706.5	140800 /704	140300 /701.5	
Mid	15											141500 /707.5	141500 /707.5	141500 /707.5	
High	15											141700 /708.5	142200 /711	142700 /713.5	
n14	SCS (kHz)	Frequency range: 788 - 798 MHz (BW = 10 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15												158600 /793	158100 /790.5	
Mid	15												158600 /793	158600 /793	
High	15												158600 /793	159100 /795.5	
n25	SCS (kHz)	Frequency range: 1850 - 1915 MHz (BW = 65 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15							374000 /1870	373000 /1865	372500 /1862.5	372000 /1860	371500 /1857.5	371000 /1855	370500 /1852.5	
Mid	15							376500 /1882.5	376500 /1882.5	376500 /1882.5	376500 /1882.5	376500 /1882.5	376500 /1882.5	376500 /1882.5	
High	15							379000 /1895	380000 /1900	380500 /1902.5	381000 /1905	381500 /1907.5	382000 /1910	382500 /1912.5	
n26	SCS (kHz)	Frequency range: 814 - 849 MHz (BW = 35 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15												163800 /819	163300 /816.5	
Mid	15												166300 /831.5	166300 /831.5	
High	15												168800 /844	169300 /846.5	
n30	SCS (kHz)	Frequency range: 2305 - 2315 MHz (BW = 10 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low	15													461500 /2307.5	
Mid	15												462000 /2310	462000 /2310	
High	15													462500 /2312.5	
n41	SCS (kHz)	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)													
		Channel Bandwidth idth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
Low - Mid	30	509196 /2545.98	508200 /2541	507198 /2535.99	506196 /2530.98	505200 /2526	504198 /2520.99	503196 /2515.98	502200 /2511		501198 /2505.99				
	30	513900 /2569.5	513396 /2566.98	512898 /2564.49	512400 /2562	511896 /2559.48	511398 /2556.99	510900 /2554.5	510396 /2551.98		509898 /2549.49				
Mid	30	518598 /2592.99	518598 /2592.99	518598 /2592.99	518598 /2592.99	518598 /2592.99	518598 /2592.99	518598 /2592.99	518598 /2592.99		518598 /2592.99				
	30	523296 /2616.48	523800 /2619	524298 /2621.49	524796 /2623.98	525300 /2626.5	525798 /2628.99	526296 /2631.48	526800 /2634		527298 /2636.49				
High	30	527994 /2639.97	528996 /2644.98	529998 /2649.99	530994 /2654.97	531996 /2659.98	532998 /2664.99	533994 /2669.97	534996 /2674.98		535998 /2679.99				

n53	SCS (kHz)	Frequency range: 2483.5 - 2495 MHz (BW = 11.5 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	30												497700 /2488.5	
Mid	30												497860 /2489.3	
High	30												498000 /2490	
n66	SCS (kHz)	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	15							346000 /1730	345000 /1725		344000 /1720	343500 /1717.5	343000 /1715	342500 /1712.5
Mid	15							349000 /1745	349000 /1745		349000 /1745	349000 /1745	349000 /1745	349000 /1745
High	15							352000 /1760	353000 /1765		354000 /1770	354500 /1772.5	355000 /1775	355500 /1777.5
n70	SCS (kHz)	Frequency range: 1695 - 1710 MHz (BW = 15 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	15											340500 /1702.5	340000 /1700	339500 /1697.5
Mid	15											340500 /1702.5	340500 /1702.5	340500 /1702.5
High	15											340500 /1702.5	341000 /1705	341500 /1707.5
n71	SCS (kHz)	Frequency range: 663 - 698 MHz (BW = 35 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	15										134600 /673	134100 /670.5	133600 /668	133100 /665.5
Mid	15										136100 /680.5	136100 /680.5	136100 /680.5	136100 /680.5
High	15										137600 /688	138100 /690.5	138600 /693	139100 /695.5
n77	SCS (kHz)	Block A Frequency range: 3450 - 3550 MHz (BW = 100 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	30	633332 /3499.98	633000 /3495	632666 /3489.99	632332 /3484.98	632000 /3480	631666 /3474.99	631332 /3469.98	631000 /3465		630666 /3459.99	630500 /3457.5	630332 /3454.98	
Mid	30	633332 /3499.98	633332 /3499.98	633332 /3499.98	633332 /3499.98	633332 /3499.98	633332 /3499.98	633332 /3499.98	633332 /3499.98		633332 /3499.98	633332 /3499.98	633332 /3499.98	
High	30	633332 /3499.98	633666 /3504.99	633998 /3509.97	634332 /3514.98	634666 /3519.99	634998 /3524.97	635332 /3529.98	635666 /3534.99		635998 /3539.97	636166 /3542.49	636332 /3544.98	
n77	SCS (kHz)	Block C Frequency range: 3700 - 3980 MHz (BW = 280 MHz)												
		Channel Bandw idth (MHz)												
		100	90	80	70	60	50	40	30	25	20	15	10	5
Low	30	649998 /3749.97	649666 /3744.99	649332 /3739.98	648998 /3734.97	648666 /3729.99	648332 /3724.98	647998 /3719.97	647666 /3714.99		647332 /3709.98	647166 /3707.49	646998 /3704.97	
Low - Mid	30	652998 /3794.97	652832 /3792.48	652666 /3789.99	652498 /3787.47	652332 /3784.98	652166 /3782.49	651998 /3779.97	651832 /3777.48		651666 /3774.99	651582 /3773.73	651498 /3772.47	
Mid	30	656000 /3840	656000 /3840	656000 /3840	656000 /3840	656000 /3840	656000 /3840	656000 /3840	656000 /3840		656000 /3840	656000 /3840	656000 /3840	
Mid-High	30	658998 /3884.97	659166 /3887.49	659332 /3889.98	659498 /3892.47	659666 /3894.99	659832 /3897.48	659998 /3899.97	660166 /3902.49		660332 /3904.98	660416 /3906.24	660498 /3907.47	
High	30	661998 /3929.97	662332 /3934.98	662666 /3939.99	662998 /3944.97	663332 /3949.98	663666 /3954.99	663998 /3959.97	664332 /3964.98		664666 /3969.99	664832 /3972.48	664998 /3974.97	
SCS		15 kHz (n2, n5, n7, n12, n14, n25, n26, n30, n66, n70, n71) 30 kHz (n41, n53, n77)												
NR(FR1) transmitter and antenna implementation		Refer to section 7 and Appendix A.												
A-MPR(Additional MPR) disabled for SAR testing?		Yes												
EN-DC Carrier Aggregation Possible Combinations														
LTE Anchor Bands for NR band n2					LTE Band 5/12/13/14/48/66									
LTE Anchor Bands for NR band n5					LTE Band 2/7/30/48/66									
LTE Anchor Bands for NR band n7					LTE Band 5/12/66									
LTE Anchor Bands for NR band n12					LTE Band 2/30/48/66									
LTE Anchor Bands for NR band n14					LTE Band 2/30/66									
LTE Anchor Bands for NR band n25					LTE Band 12/48/66									
LTE Anchor Bands for NR band n26					N/A									
LTE Anchor Bands for NR band n30					LTE Band 5/12/14/66									
LTE Anchor Bands for NR band n41					LTE Band 2/4/25/26/41/66									
LTE Anchor Bands for NR band n53					LTE Band 48									

LTE Anchor Bands for NR band n66	LTE Band 2/5/7/12/13/14/30/48/71
LTE Anchor Bands for NR band n70	N/A
LTE Anchor Bands for NR band n71	LTE Band 2/7/48/66
LTE Anchor Bands for NR band n77	LTE Band 2/5/7/12/13/14/30/41/66/71

Notes:

1. Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per FCC Guidance.
2. SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. FR1 supported standalone.

6.6. Time-Average Feature

The equipment under test (EUT) incorporates the Smart Transmit (SmartTX) SAR averaging algorithm provided by Qualcomm for cellular technologies. Smart Transmit controls the Tx power of the cellular-based wireless device in real-time to maintain the time-averaged Tx power, and in turn, time-averaged RF exposure, below the predefined time-average power limit characterized for each technology and band.

The purpose of the Part 1 test in this report is to demonstrate that the EUT meets the FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target or PD_design_target, below the predefined time-average power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously as high as $P_{\max}$, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . Below table shows P_{limit} EFS settings and maximum tune up output power $P_{\max}$ configured for this EUT for various transmit conditions (DSI – Device State Index).

The maximum time-averaged output power (dBm) for any 2G/3G/4G/5G NR WWAN technology band, and DSI = minimum of “ P_{limit} EFS” and “Maximum tune up output power $P_{\max}$ ” includes device uncertainty.

SAR values in this report were scaled to the maximum time-averaged output power to determine compliance following KDB 447498 D01.

P_{design}	The power level that corresponds to the exposure design target (SAR_design_target) after accounting for all device design related uncertainties.
P_{limit}	Maximum tune-up output power for SAR Mode A and Mode B
$P_{\max}$	Maximum tune-up output power for RF
SAR Characterization	Table containing P_{limit} for all technologies and bands

SAR Characterization

Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band		P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table		
Transmit Average		Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 1	GSM 850 2 slots ¹	0.25	38.64	32.50	32.62	26.48	32.69	30.50	26.67	24.48	32.50	26.48
	GSM 1900 2 slots ¹	0.25	36.75	31.00	30.73	24.98	26.53	25.00	20.51	18.98	31.00	24.98
	W-CDMA B2	1	29.80	25.70	29.80	25.70	19.74	19.00	19.74	19.00	25.70	25.70
	W-CDMA B4	1	35.12	24.80	35.12	24.80	18.92	18.10	18.92	18.10	25.70	25.70
	W-CDMA B5	1	32.24	25.70	32.24	25.70	25.62	24.50	25.62	24.50	25.70	25.70
	LTE Band 5	1	33.03	25.70	33.03	25.70	25.77	24.50	25.77	24.50	25.70	25.70
	LTE Band 7	1	28.64	25.70	28.64	25.70	20.84	20.20	20.84	20.20	25.70	25.70
	LTE Band 12/17	1	34.21	25.70	34.21	25.70	26.90	25.70	26.90	25.70	25.70	25.70
	LTE Band 13	1	31.77	25.70	31.77	25.70	26.51	25.70	26.51	25.70	25.70	25.70
	LTE Band 14	1	31.77	25.70	31.77	25.70	27.40	25.70	27.40	25.70	25.70	25.70
	LTE Band 25/2	1	29.01	25.70	29.01	25.70	19.98	19.00	19.98	19.00	25.70	25.70
	LTE Band 26	1	32.82	25.70	32.82	25.70	26.65	24.50	26.65	24.50	25.70	25.70
	LTE Band 30	1	28.36	25.60	28.36	25.60	20.83	20.20	20.83	20.20	25.60	25.60
	LTE Band 41 ¹	0.633	31.24	25.70	29.26	23.71	22.72	22.40	20.73	20.41	25.70	23.71
	LTE Band 41(PC2) ¹	0.433	32.19	28.70	28.56	25.06	N/A	N/A	N/A	N/A	28.70	25.06
	LTE Band 53	0.633	29.84	20.70	27.85	18.71	22.54	20.70	20.56	18.71	20.70	18.71
	LTE Band 66/4	1	31.79	24.80	31.79	24.80	18.78	18.10	18.78	18.10	25.70	25.70
	LTE Band 71	1	33.82	25.70	33.82	25.70	27.01	25.70	27.01	25.70	25.70	25.70
	NR n5	1	33.60	25.70	33.60	25.70	27.32	24.50	27.32	24.50	25.70	25.70
	NR n7	1	28.47	25.70	28.47	25.70	21.68	20.20	21.68	20.20	25.70	25.70
	NR n12	1	33.29	25.70	33.29	25.70	27.14	25.70	27.14	25.70	25.70	25.70
	NR n14	1	32.63	25.70	32.63	25.70	27.62	25.70	27.62	25.70	25.70	25.70
	NR n25/2	1	29.14	25.70	29.14	25.70	20.82	19.00	20.82	19.00	25.70	25.70
	NR n26	1	33.88	25.70	33.88	25.70	26.15	24.50	26.15	24.50	25.70	25.70
NR n30	1	28.59	25.60	28.59	25.60	21.09	20.20	21.09	20.20	25.60	25.60	
NR n41 ¹	1	29.25	25.70	29.25	25.70	21.73	20.40	21.73	20.40	25.70	25.70	
NR n53 ¹	1	30.33	20.70	30.33	20.70	22.23	20.70	22.23	20.70	20.70	20.70	
NR n66	1	32.01	24.80	32.01	24.80	18.91	18.10	18.91	18.10	25.70	25.70	
NR n70	1	33.01	24.80	33.01	24.80	18.82	18.10	18.82	18.10	25.70	25.70	
NR n71	1	33.74	25.70	33.74	25.70	27.08	25.70	27.08	25.70	25.70	25.70	
Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band		P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR design target)	P _{limit} (dBm) Tune-up power table		
Transmit Average		Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 2	GSM 850 2 slots ¹	0.25	31.42	30.10	25.40	24.08	34.99	31.50	28.97	25.48	31.50	25.48
	GSM 1900 2 slots ¹	0.25	28.65	27.50	22.63	21.48	29.08	27.70	23.06	21.68	28.50	22.48
	W-CDMA B2	1	22.21	21.50	22.21	21.50	22.59	21.70	22.59	21.70	23.40	23.40
	W-CDMA B4	1	22.15	21.00	22.15	21.00	22.00	21.30	22.00	21.30	23.40	23.40
	W-CDMA B5	1	24.60	24.10	24.60	24.10	27.08	24.70	27.08	24.70	24.70	24.70
	LTE Band 5	1	24.56	24.10	24.56	24.10	25.96	24.70	25.96	24.70	24.70	24.70
	LTE Band 7	1	18.94	18.50	18.94	18.50	19.08	18.80	19.08	18.80	23.70	23.70
	LTE Band 12/17	1	24.70	24.30	24.70	24.30	25.75	24.70	25.75	24.70	24.70	24.70
	LTE Band 13	1	24.86	24.50	24.86	24.50	25.47	24.70	25.47	24.70	24.70	24.70
	LTE Band 14	1	25.05	24.50	25.05	24.50	25.49	24.70	25.49	24.70	24.70	24.70
	LTE Band 25/2	1	21.90	21.50	21.90	21.50	22.09	21.70	22.09	21.70	23.40	23.40
	LTE Band 26	1	25.14	24.10	25.14	24.10	31.72	24.70	31.72	24.70	24.70	24.70
	LTE Band 30	1	21.16	20.50	21.16	20.50	21.23	21.00	21.23	21.00	23.70	23.70
	LTE Band 41 ¹	0.633	20.87	20.30	18.89	18.31	21.12	20.80	19.13	18.81	25.70	23.71
	LTE Band 53	0.633	20.94	20.70	18.96	18.71	21.21	20.70	19.23	18.71	20.70	18.71
	LTE Band 66/4	1	21.27	21.00	21.27	21.00	21.53	21.30	21.53	21.30	25.70	25.70
	LTE Band 71	1	25.28	24.70	25.28	24.70	26.75	24.70	26.75	24.70	24.70	24.70
	NR n5	1	25.38	24.10	25.38	24.10	26.90	24.70	26.90	24.70	24.70	24.70
	NR n7	1	18.87	18.50	18.87	18.50	19.74	18.80	19.74	18.80	23.70	23.70
	NR n12	1	24.57	24.30	24.57	24.30	26.37	24.70	26.37	24.70	24.70	24.70
	NR n14	1	24.74	24.50	24.74	24.50	25.72	24.70	25.72	24.70	24.70	24.70
	NR n25/2	1	22.46	21.50	22.46	21.50	22.43	21.70	22.43	21.70	23.40	23.40
	NR n26	1	25.58	24.10	25.58	24.10	32.21	24.70	32.21	24.70	24.70	24.70
	NR n30	1	20.77	20.50	20.77	20.50	21.82	21.00	21.82	21.00	23.70	23.70
	NR n41 ¹	1	18.54	18.30	18.54	18.30	19.07	18.80	19.07	18.80	25.70	25.70
	NR n53 ¹	1	21.36	20.70	21.36	20.70	22.26	20.70	22.26	20.70	20.70	20.70
	NR n66	1	21.89	21.00	21.89	21.00	21.86	21.30	21.86	21.30	25.70	25.70
	NR n70	1	21.81	21.00	21.81	21.00	22.09	21.30	22.09	21.30	25.70	25.70
NR n71	1	26.48	24.70	26.48	24.70	27.08	24.70	27.08	24.70	24.70	24.70	

Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table			
	Transmit Average	Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 3	GSM 1900 2 slots ¹	0.25	36.30	30.50	30.28	24.48	27.43	26.80	21.41	20.78	30.50	24.48
	W-CDMA B2	1	29.41	24.80	29.41	24.80	21.64	20.80	21.64	20.80	25.50	25.50
	W-CDMA B4	1	29.70	25.50	29.70	25.50	22.66	21.50	22.66	21.50	25.50	25.50
	LTE Band 7	1	25.05	23.30	25.05	23.30	18.15	17.10	18.15	17.10	25.00	25.00
	LTE Band 25/2	1	29.68	24.80	29.68	24.80	21.64	20.80	21.64	20.80	25.50	25.50
	LTE Band 30	1	25.94	23.60	25.94	23.60	20.25	19.30	20.25	19.30	23.60	23.60
	LTE Band 41 ¹	0.633	27.93	25.70	25.94	23.71	20.34	19.10	18.35	17.11	25.70	23.71
	LTE Band 66/4	1	30.30	25.50	30.30	25.50	22.31	21.50	22.31	21.50	25.50	25.50
	NR n7	1	24.51	23.30	24.51	23.30	18.16	17.10	18.16	17.10	25.00	25.00
	NR n25/2	1	28.93	24.80	28.93	24.80	21.50	20.80	21.50	20.80	25.50	25.50
	NR n30	1	26.32	23.60	26.32	23.60	20.81	19.30	20.81	19.30	23.60	23.60
	NR n41 ¹	1	26.37	24.00	26.37	24.00	18.41	17.10	18.41	17.10	25.70	25.70
NR n66	1	29.38	25.50	29.38	25.50	22.80	21.50	22.80	21.50	25.50	25.50	
NR n70	1	35.01	25.50	35.01	25.50	25.14	21.50	25.14	21.50	25.50	25.50	
Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table			
	Transmit Average	Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 4	GSM 1900 2 slots ¹	0.25	26.10	25.20	20.08	19.18	28.02	26.50	22.00	20.48	28.00	21.98
	W-CDMA B2	1	20.31	19.20	20.31	19.20	20.80	19.80	20.80	19.80	23.40	23.40
	W-CDMA B4	1	20.48	19.10	20.48	19.10	20.79	19.30	20.79	19.30	23.40	23.40
	LTE Band 7	1	19.91	19.50	19.91	19.50	20.65	20.40	20.65	20.40	23.20	23.20
	LTE Band 25/2	1	19.63	19.20	19.63	19.20	20.04	19.80	20.04	19.80	23.40	23.40
	LTE Band 30	1	19.99	19.70	19.99	19.70	20.43	20.10	20.43	20.10	23.20	23.20
	LTE Band 41 ¹	0.633	22.56	21.00	20.58	19.01	22.83	22.50	20.84	20.51	25.70	23.71
	LTE Band 48 ¹	0.633	23.50	21.80	21.51	19.81	23.25	23.00	21.26	21.01	25.50	23.51
	LTE Band 66/4	1	19.39	19.10	19.39	19.10	19.82	19.30	19.82	19.30	25.20	25.20
	NR n7	1	19.95	19.50	19.95	19.50	21.27	20.40	21.27	20.40	23.20	23.20
	NR n25/2	1	20.03	19.20	20.03	19.20	20.21	19.80	20.21	19.80	23.40	23.40
	NR n30	1	20.68	19.70	20.68	19.70	20.42	20.10	20.42	20.10	23.20	23.20
	NR n41 ¹	1	19.72	19.00	19.72	19.00	21.40	20.50	21.40	20.50	25.70	25.70
	NR n66	1	19.79	19.10	19.79	19.10	20.03	19.30	20.03	19.30	25.20	25.20
NR n70	1	19.59	19.10	19.59	19.10	20.36	19.30	20.36	19.30	25.20	25.20	
NR n77 ¹	1	18.42	18.10	18.42	18.10	18.93	18.70	18.93	18.70	25.50	25.50	
Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 10 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table			
	Transmit Average	Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 7	LTE Band 48 ¹	0.633	31.65	25.40	29.66	23.41	22.44	22.10	20.45	20.11	25.40	23.41
	NR n77 ¹	1	28.23	25.50	28.23	25.50	19.27	19.00	19.27	19.00	25.70	25.70
Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table			
	Transmit Average	Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 8	LTE Band 48 ¹	0.633	22.76	22.50	20.77	20.51	23.39	23.00	21.40	21.01	25.60	23.61
	NR n77 ¹	1	19.49	19.20	19.49	19.20	19.21	18.50	19.21	18.50	25.70	25.70
Exposure Scenario		factor	Head				Body-worn & Hotspot				P _{max} (dBm) Tune-up power table	
Spatial-average			1g				1g					
Test Distance			0 mm				5 mm					
Power Mode (DSI)			Mode A (DSI=0)				Mode B (DSI=1)					
Antenna	Tech/Band	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table	P _{design} (dBm) corresponding to 1.0 W/kg (SAR _{design_target})	P _{limit} (dBm) Tune-up power table			
	Transmit Average	Burst Average		Frame Average		Burst Average		Frame Average		Burst Average	Frame Average	
ANT 9	LTE Band 48 ¹	0.633	32.31	24.30	30.33	22.31	22.20	21.60	20.22	19.61	24.30	22.31
	NR n77 ¹	1	31.54	25.50	31.54	25.50	19.80	18.80	19.80	18.80	25.70	25.70

Note(s):

1. All P_{limit} EFS and maximum tune up output P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., GSM & LTE TDD).
2. Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting Reserve_power_margin (Smart Transmit EFS entry) to 0 dB.
3. Only P_{limit} is considered for SAR Evaluation.

7. RF Exposure Conditions (Test Configurations)

This device has a total of 9 antennas. From Front of the device, antennas and supported frequencies are described and located as follows:

Antenna	Band	Rear	Front	Edge 1	Edge 2	Edge 3	Edge 4
				(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
ANT1	GSM 850/1900 WCDMA B2/4/5 LTE B2/4/5/7/12/13/14/17/25/26/30/41/53/66/71 5G(FR1) n2/n5/n7/n12/n14/n25/n26/n30/n41/n53/n66/n70/n71 MSS (L-Band)	Yes	Yes	No	Yes	Yes	Yes
ANT2	GSM 850/1900 WCDMA B2/4/5 LTE B2/4/5/7/12/13/14/17/25/26/30/41/53/66/71 5G(FR1) n2/n5/n7/n12/n14/n25/n26/n30/n41/n53/n66/n70/n71	Yes	Yes	Yes	Yes	No	Yes
ANT3	GSM 1900 WCDMA B2/4 LTE B2/4/7/25/30/41/66 5G(FR1) n2/n7/n25/n30/n41/n66/n70 Wi-Fi 2.4GHz Bluetooth	Yes	Yes	No	No	Yes	Yes
ANT4	GSM 1900 WCDMA B2/4 LTE B2/4/7/25/30/41/48/66 5G(FR1) n2/n7/n25/n30/n41/n66/n70/n77 MSS (L-Band) Wi-Fi 2.4GHz Bluetooth	Yes	Yes	Yes	Yes	No	No
ANT5	Wi-Fi 5GHz	Yes	Yes	No	No	Yes	Yes
ANT6	Wi-Fi 5GHz	Yes	Yes	Yes	No	No	Yes
ANT7	LTE B48 5G(FR1) n77	Yes	Yes	No	Yes	Yes	No
ANT8	LTE B48 5G(FR1) n77	Yes	Yes	Yes	No	No	Yes
ANT9	LTE B48 5G(FR1) n77	Yes	Yes	No	No	Yes	Yes

Note(s):

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot Mode.
2. The Body-worn minimum separation distance is 5 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 5 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
A	5/16/2022	1900	Head	1900	38.40	40.00	-4.00%	1.37	1.40	-2.07%
				1850	38.50	40.00	-3.75%	1.34	1.40	-4.00%
				1920	38.35	40.00	-4.13%	1.39	1.40	-0.93%
A	5/18/2022	1900	Head	1900	41.57	40.00	3.93%	1.46	1.40	4.36%
				1850	41.42	40.00	3.55%	1.44	1.40	3.07%
				1920	41.58	40.00	3.95%	1.47	1.40	4.79%
A	5/22/2022	1900	Head	1900	38.26	40.00	-4.35%	1.45	1.40	3.79%
				1850	38.39	40.00	-4.03%	1.42	1.40	1.43%
				1920	38.23	40.00	-4.43%	1.47	1.40	4.79%
A	5/26/2022	1900	Head	1900	38.35	40.00	-4.13%	1.40	1.40	0.00%
				1850	38.39	40.00	-4.03%	1.38	1.40	-1.57%
				1920	38.35	40.00	-4.13%	1.41	1.40	0.79%
A	5/29/2022	1900	Head	1900	39.93	40.00	-0.18%	1.40	1.40	0.00%
				1850	39.98	40.00	-0.05%	1.37	1.40	-2.21%
				1920	39.90	40.00	-0.25%	1.42	1.40	1.07%
A	6/2/2022	1900	Head	1900	41.56	40.00	3.90%	1.43	1.42	0.99%
				1850	41.53	40.00	3.83%	1.40	1.40	-0.07%
				1920	41.55	40.00	3.87%	1.45	1.40	3.50%
A	6/5/2022	1900	Head	1900	38.98	40.00	-2.55%	1.45	1.40	3.29%
				1850	39.06	40.00	-2.35%	1.42	1.40	1.29%
				1920	38.95	40.00	-2.62%	1.46	1.40	4.14%
A	6/9/2022	1900	Head	1900	39.60	40.00	-1.00%	1.44	1.40	2.50%
				1850	39.70	40.00	-0.75%	1.40	1.40	0.14%
				1920	39.56	40.00	-1.10%	1.45	1.40	3.36%
A	6/12/2022	1900	Head	1900	39.42	40.00	-1.45%	1.39	1.40	-0.86%
				1850	39.47	40.00	-1.33%	1.36	1.40	-2.64%
				1920	39.42	40.00	-1.45%	1.40	1.40	-0.07%
A	6/16/2022	1900	Head	1900	41.48	40.00	3.70%	1.42	1.40	1.21%
				1850	41.52	40.00	3.80%	1.39	1.40	-1.07%
				1920	41.43	40.00	3.58%	1.43	1.40	2.07%
A	6/19/2022	1900	Head	1900	38.51	40.00	-3.73%	1.39	1.40	-1.00%
				1850	38.60	40.00	-3.50%	1.36	1.40	-2.93%
				1920	38.48	40.00	-3.80%	1.40	1.40	-0.21%
A	6/23/2022	1900	Head	1900	39.75	40.00	-0.63%	1.46	1.40	4.07%
				1850	39.84	40.00	-0.40%	1.43	1.40	2.07%
				1920	39.72	40.00	-0.70%	1.47	1.40	4.79%
A	6/26/2022	1900	Head	1900	39.30	40.00	-1.75%	1.44	1.40	3.14%
				1850	39.43	40.00	-1.43%	1.42	1.40	1.29%
				1920	39.25	40.00	-1.88%	1.46	1.40	4.00%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
B	5/16/2022	1750	Head	1750	39.18	40.08	-2.26%	1.32	1.37	-3.29%
				1695	39.33	40.17	-2.09%	1.29	1.34	-3.58%
				1755	39.17	40.08	-2.26%	1.33	1.37	-3.19%
B	5/18/2022	1750	Head	1750	39.02	40.08	-2.66%	1.36	1.37	-0.51%
				1695	39.17	40.17	-2.49%	1.35	1.34	0.68%
				1755	38.98	40.08	-2.74%	1.37	1.37	-0.50%
B	5/22/2022	1750	Head	1750	38.15	40.08	-4.83%	1.41	1.37	2.78%
				1695	38.19	40.17	-4.93%	1.38	1.34	3.29%
				1755	38.16	40.08	-4.78%	1.41	1.37	2.71%
B	5/26/2022	1750	Head	1750	41.04	40.08	2.38%	1.33	1.37	-2.70%
				1695	41.08	40.17	2.27%	1.30	1.34	-3.14%
				1755	41.03	40.08	2.38%	1.33	1.37	-2.90%
B	5/29/2022	1750	Head	1750	38.72	40.08	-3.40%	1.41	1.37	3.29%
				1695	38.82	40.17	-3.36%	1.39	1.34	3.52%
				1755	38.71	40.08	-3.41%	1.42	1.37	3.30%
B	6/2/2022	1750	Head	1750	38.48	40.08	-4.00%	1.43	1.37	4.38%
				1695	38.56	40.17	-4.01%	1.39	1.34	4.19%
				1755	38.47	40.08	-4.01%	1.43	1.37	4.17%
B	6/5/2022	1750	Head	1750	38.94	40.08	-2.86%	1.41	1.37	2.85%
				1695	39.05	40.17	-2.79%	1.38	1.34	2.77%
				1755	38.93	40.08	-2.86%	1.41	1.37	2.86%
B	6/9/2022	1750	Head	1750	39.88	40.08	-0.51%	1.37	1.37	0.15%
				1695	40.00	40.17	-0.42%	1.34	1.34	0.08%
				1755	39.87	40.08	-0.52%	1.37	1.37	0.09%
B	6/12/2022	1750	Head	1750	38.41	40.08	-4.18%	1.39	1.37	1.46%
				1695	38.32	40.17	-4.60%	1.36	1.34	1.65%
				1755	38.41	40.08	-4.16%	1.39	1.37	1.47%
B	6/16/2022	1750	Head	1750	38.41	40.08	-4.18%	1.40	1.37	2.56%
				1695	38.49	40.17	-4.18%	1.37	1.34	2.69%
				1755	38.40	40.08	-4.18%	1.41	1.37	2.57%
B	6/19/2022	1750	Head	1750	39.09	40.08	-2.48%	1.32	1.37	-3.36%
				1695	39.16	40.17	-2.51%	1.30	1.34	-3.14%
				1755	39.08	40.08	-2.49%	1.33	1.37	-3.41%
B	6/23/2022	1750	Head	1750	40.57	40.08	1.21%	1.39	1.37	1.39%
				1695	40.67	40.17	1.25%	1.35	1.34	1.05%
				1755	40.56	40.08	1.21%	1.39	1.37	1.47%
B	6/26/2022	1750	Head	1750	38.93	40.08	-2.88%	1.40	1.37	2.49%
				1695	39.02	40.17	-2.86%	1.37	1.34	2.40%
				1755	38.92	40.08	-2.89%	1.41	1.37	2.49%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
C	5/16/2022	1900	Head	1900	38.32	40.00	-4.20%	1.42	1.40	1.21%
				1850	38.13	40.00	-4.67%	1.42	1.40	1.07%
				1920	38.26	40.00	-4.35%	1.41	1.40	0.93%
C	5/16/2022	1750	Head	1750	38.24	40.08	-4.60%	1.36	1.37	-0.73%
				1695	38.69	40.17	-3.68%	1.30	1.34	-2.76%
				1755	38.23	40.08	-4.61%	1.37	1.37	-0.06%
C	5/18/2022	1750	Head	1750	39.91	40.08	-0.44%	1.34	1.37	-1.97%
				1695	39.94	40.17	-0.57%	1.31	1.34	-2.01%
				1755	39.90	40.08	-0.44%	1.35	1.37	-1.88%
C	5/18/2022	1900	Head	1900	39.68	40.00	-0.80%	1.44	1.40	2.57%
				1850	39.77	40.00	-0.57%	1.41	1.40	0.57%
				1920	39.66	40.00	-0.85%	1.45	1.40	3.57%
C	5/22/2022	1750	Head	1750	38.91	40.08	-2.93%	1.36	1.37	-0.66%
				1695	38.93	40.17	-3.09%	1.34	1.34	0.08%
				1755	38.91	40.08	-2.91%	1.36	1.37	-0.71%
C	5/22/2022	1900	Head	1900	38.71	40.00	-3.23%	1.45	1.40	3.86%
				1850	38.81	40.00	-2.97%	1.42	1.40	1.29%
				1920	38.69	40.00	-3.28%	1.47	1.40	4.64%
C	5/26/2022	1750	Head	1750	39.01	40.08	-2.68%	1.39	1.37	1.46%
				1695	39.08	40.17	-2.71%	1.36	1.34	1.42%
				1755	39.00	40.08	-2.69%	1.39	1.37	1.47%
C	5/26/2022	1900	Head	1900	38.08	40.00	-4.80%	1.45	1.40	3.79%
				1850	38.15	40.00	-4.63%	1.43	1.40	1.79%
				1920	38.05	40.00	-4.88%	1.47	1.40	4.64%
C	5/29/2022	1750	Head	1750	41.02	40.08	2.33%	1.39	1.37	1.17%
				1695	41.08	40.17	2.27%	1.35	1.34	1.12%
				1755	41.01	40.08	2.33%	1.39	1.37	1.18%
C	5/29/2022	1900	Head	1900	38.48	40.00	-3.80%	1.44	1.40	3.14%
				1850	38.56	40.00	-3.60%	1.41	1.40	1.00%
				1920	38.46	40.00	-3.85%	1.46	1.40	4.00%
C	6/2/2022	1750	Head	1750	38.97	40.08	-2.78%	1.37	1.37	0.22%
				1695	39.07	40.17	-2.74%	1.35	1.34	0.68%
				1755	38.97	40.08	-2.76%	1.37	1.35	2.00%
C	6/2/2022	1900	Head	1900	38.81	40.00	-2.97%	1.46	1.40	4.00%
				1850	38.92	40.00	-2.70%	1.43	1.40	1.79%
				1920	38.78	40.00	-3.05%	1.47	1.40	4.86%
C	6/5/2022	1750	Head	1750	38.75	40.08	-3.33%	1.36	1.37	-0.87%
				1695	38.85	40.17	-3.28%	1.32	1.34	-1.12%
				1755	38.74	40.08	-3.34%	1.36	1.37	-1.08%
C	6/5/2022	1900	Head	1900	38.42	40.00	-3.95%	1.46	1.40	4.00%
				1850	38.50	40.00	-3.75%	1.43	1.40	2.07%
				1920	38.39	40.00	-4.03%	1.47	1.40	4.86%
C	6/9/2022	1750	Head	1750	38.95	40.08	-2.83%	1.34	1.37	-2.48%
				1695	39.15	40.17	-2.54%	1.29	1.34	-3.28%
				1755	38.93	40.08	-2.86%	1.34	1.37	-2.39%
C	6/9/2022	1900	Head	1900	38.69	40.00	-3.28%	1.42	1.40	1.07%
				1850	38.73	40.00	-3.18%	1.39	1.40	-1.00%
				1920	38.70	40.00	-3.25%	1.43	1.40	1.79%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
C	6/12/2022	1750	Head	1750	39.65	40.08	-1.08%	1.36	1.37	-0.44%
				1695	39.72	40.17	-1.12%	1.34	1.34	-0.15%
				1755	39.65	40.08	-1.07%	1.37	1.37	-0.20%
C	6/12/2022	1900	Head	1900	39.42	40.00	-1.45%	1.45	1.40	3.50%
				1850	39.48	40.00	-1.30%	1.42	1.40	1.64%
				1920	39.41	40.00	-1.48%	1.46	1.40	4.36%
C	6/16/2022	1750	Head	1750	39.32	40.08	-1.91%	1.33	1.37	-2.85%
				1695	39.42	40.17	-1.87%	1.30	1.34	-2.76%
				1755	39.31	40.08	-1.91%	1.33	1.37	-2.83%
C	6/16/2022	1900	Head	1900	39.11	40.00	-2.23%	1.43	1.40	2.29%
				1850	39.16	40.00	-2.10%	1.40	1.40	-0.29%
				1920	39.09	40.00	-2.27%	1.44	1.40	3.14%
C	6/19/2022	1750	Head	1750	40.42	40.08	0.84%	1.42	1.37	3.80%
				1695	40.53	40.17	0.90%	1.39	1.34	3.89%
				1755	40.41	40.08	0.83%	1.42	1.37	3.81%
C	6/19/2022	1900	Head	1900	39.07	40.00	-2.33%	1.38	1.40	-1.36%
				1850	39.16	40.00	-2.10%	1.36	1.40	-3.21%
				1920	39.04	40.00	-2.40%	1.39	1.40	-0.57%
C	6/23/2022	1750	Head	1750	38.89	40.08	-2.98%	1.41	1.37	2.85%
				1695	39.00	40.17	-2.91%	1.38	1.34	3.14%
				1755	38.88	40.08	-2.99%	1.41	1.37	2.86%
C	6/23/2022	1900	Head	1900	38.06	40.00	-4.85%	1.38	1.40	-1.64%
				1850	38.17	40.00	-4.58%	1.35	1.40	-3.93%
				1920	38.02	40.00	-4.95%	1.39	1.40	-0.71%
C	6/26/2022	1750	Head	1750	41.35	40.08	3.16%	1.39	1.37	1.68%
				1695	41.46	40.17	3.21%	1.35	1.34	0.83%
				1755	41.34	40.08	3.15%	1.40	1.37	1.69%
C	6/26/2022	1900	Head	1900	38.85	40.00	-2.88%	1.44	1.40	2.57%
				1850	38.91	40.00	-2.73%	1.41	1.40	0.36%
				1920	38.83	40.00	-2.93%	1.45	1.40	3.50%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
D	5/16/2022	2300	Head	2300	37.99	39.47	-3.76%	1.60	1.66	-3.71%
				2350	37.51	39.38	-4.76%	1.70	1.71	-0.33%
				2400	37.86	39.30	-3.66%	1.74	1.75	-0.66%
D	5/18/2022	2300	Head	2300	39.99	39.47	1.31%	1.66	1.66	-0.28%
				2350	39.90	39.38	1.31%	1.70	1.71	-0.63%
				2400	39.79	39.30	1.26%	1.73	1.75	-1.12%
D	5/22/2022	2300	Head	2300	38.09	39.47	-3.50%	1.64	1.66	-1.73%
				2350	38.03	39.38	-3.44%	1.67	1.71	-2.27%
				2400	37.94	39.30	-3.45%	1.70	1.75	-2.89%
D	5/26/2022	2300	Head	2300	38.46	39.47	-2.57%	1.66	1.66	-0.34%
				2350	38.36	39.38	-2.60%	1.70	1.71	-0.68%
				2400	38.26	39.30	-2.64%	1.73	1.75	-1.24%
D	5/29/2022	2300	Head	2300	38.16	39.47	-3.33%	1.67	1.66	0.56%
				2350	38.05	39.38	-3.39%	1.71	1.71	0.31%
				2400	37.95	39.30	-3.43%	1.75	1.75	-0.15%
D	6/2/2022	2300	Head	2300	41.26	39.47	4.53%	1.69	1.66	1.52%
				2350	41.14	39.38	4.46%	1.73	1.71	1.31%
				2400	40.87	39.30	4.00%	1.79	1.75	2.08%
D	6/5/2022	2300	Head	2300	41.05	39.47	4.00%	1.70	1.66	2.24%
				2350	40.95	39.38	3.97%	1.74	1.71	1.95%
				2400	40.82	39.30	3.88%	1.78	1.75	1.73%
D	6/9/2022	2300	Head	2300	39.50	39.47	0.07%	1.73	1.66	3.68%
				2350	39.35	39.38	-0.09%	1.74	1.71	1.77%
				2400	39.19	39.30	-0.27%	1.80	1.75	2.87%
D	6/12/2022	2300	Head	2300	39.46	39.47	-0.03%	1.72	1.66	3.56%
				2350	39.38	39.38	-0.01%	1.76	1.71	2.95%
				2400	39.29	39.30	-0.02%	1.79	1.75	2.25%
D	6/16/2022	2300	Head	2300	40.14	39.47	1.69%	1.65	1.66	-1.13%
				2350	40.04	39.38	1.66%	1.68	1.71	-1.91%
				2400	39.89	39.30	1.51%	1.73	1.75	-1.06%
D	6/19/2022	2300	Head	2300	39.80	39.47	0.83%	1.69	1.66	1.64%
				2350	39.72	39.38	0.85%	1.73	1.71	1.19%
				2400	39.62	39.30	0.82%	1.76	1.75	0.71%
D	6/23/2022	2300	Head	2300	37.66	39.47	-4.59%	1.61	1.66	-3.05%
				2350	37.58	39.38	-4.58%	1.65	1.71	-3.50%
				2400	37.49	39.30	-4.60%	1.68	1.75	-4.09%
D	6/26/2022	2300	Head	2300	39.30	39.47	-0.44%	1.71	1.66	2.48%
				2350	39.24	39.38	-0.37%	1.74	1.71	1.83%
				2400	39.06	39.30	-0.60%	1.78	1.75	1.62%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
E	5/15/2022	2450	Head	2450	39.24	39.20	0.10%	1.80	1.80	0.22%
				2400	39.31	39.30	0.03%	1.77	1.75	0.76%
				2500	39.14	39.14	0.01%	1.84	1.85	-0.65%
E	5/19/2022	2450	Head	2450	39.64	39.20	1.12%	1.81	1.80	0.39%
				2400	39.71	39.30	1.05%	1.81	1.75	3.16%
				2500	39.54	39.14	1.03%	1.89	1.85	1.83%
E	5/23/2022	2450	Head	2450	38.01	39.20	-3.04%	1.76	1.80	-2.28%
				2400	38.07	39.30	-3.12%	1.72	1.75	-1.75%
				2500	37.92	39.14	-3.11%	1.79	1.85	-3.24%
E	5/26/2022	2450	Head	2450	39.42	39.20	0.56%	1.86	1.80	3.44%
				2400	39.53	39.30	0.59%	1.82	1.75	3.90%
				2500	39.26	39.14	0.31%	1.91	1.85	2.96%
E	5/29/2022	2450	Head	2450	40.78	39.20	4.03%	1.73	1.80	-3.78%
				2400	40.78	39.30	3.77%	1.69	1.75	-3.69%
				2500	40.70	39.14	3.99%	1.77	1.85	-4.48%
E	6/2/2022	2450	Head	2450	38.15	39.20	-2.68%	1.81	1.80	0.78%
				2400	38.24	39.30	-2.69%	1.77	1.75	0.99%
				2500	38.01	39.14	-2.88%	1.86	1.85	0.43%
E	6/5/2022	2450	Head	2450	40.66	39.20	3.72%	1.81	1.80	0.28%
				2400	40.73	39.30	3.65%	1.76	1.75	0.36%
				2500	40.54	39.14	3.59%	1.85	1.85	-0.43%
E	6/9/2022	2450	Head	2450	38.00	39.20	-3.06%	1.73	1.80	-3.78%
				2400	38.05	39.30	-3.17%	1.69	1.75	-3.58%
				2500	37.94	39.14	-3.06%	1.77	1.85	-4.53%
E	6/12/2022	2450	Head	2450	38.36	39.20	-2.14%	1.75	1.80	-2.67%
				2400	38.41	39.30	-2.26%	1.71	1.75	-2.32%
				2500	38.28	39.14	-2.19%	1.79	1.85	-3.45%
E	6/16/2022	2450	Head	2450	39.95	39.20	1.91%	1.82	1.80	0.94%
				2400	40.01	39.30	1.82%	1.78	1.75	1.62%
				2500	39.86	39.14	1.85%	1.86	1.85	0.05%
E	6/19/2022	2450	Head	2450	41.15	39.20	4.97%	1.78	1.80	-0.94%
				2400	41.23	39.30	4.92%	1.74	1.75	-0.49%
				2500	41.05	39.14	4.89%	1.82	1.85	-1.89%
E	6/23/2022	2450	Head	2450	39.25	39.20	0.13%	1.83	1.80	1.50%
				2400	39.33	39.30	0.08%	1.79	1.75	2.08%
				2500	39.12	39.14	-0.04%	1.87	1.85	0.86%
E	6/26/2022	2450	Head	2450	37.45	39.20	-4.46%	1.77	1.80	-1.44%
				2400	37.56	39.30	-4.42%	1.73	1.75	-1.01%
				2500	37.39	39.14	-4.46%	1.81	1.85	-2.21%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
F	5/15/2022	5250	Head	5250	36.71	35.93	2.16%	4.60	4.70	-2.17%
				5150	36.72	36.05	1.87%	4.53	4.60	-1.47%
				5350	36.64	35.82	2.29%	4.68	4.80	-2.57%
F	5/19/2022	5250	Head	5250	35.32	35.93	-1.71%	4.55	4.70	-3.32%
				5150	35.56	36.05	-1.35%	4.45	4.60	-3.37%
				5350	35.08	35.82	-2.06%	4.66	4.80	-3.07%
F	5/22/2022	5250	Head	5250	36.34	35.93	1.13%	4.59	4.70	-2.43%
				5150	36.52	36.05	1.31%	4.48	4.60	-2.63%
				5350	36.17	35.82	0.98%	4.70	4.80	-2.24%
F	5/26/2022	5250	Head	5250	34.38	35.93	-4.32%	4.52	4.70	-3.94%
				5150	34.63	36.05	-3.93%	4.42	4.60	-3.84%
				5350	34.15	35.82	-4.66%	4.65	4.80	-3.30%
F	5/29/2022	5250	Head	5250	34.63	35.93	-3.63%	4.49	4.70	-4.60%
				5150	34.85	36.05	-3.32%	4.37	4.60	-4.97%
				5350	34.43	35.82	-3.88%	4.61	4.80	-4.01%
F	6/2/2022	5250	Head	5250	36.89	35.93	2.66%	4.67	4.70	-0.73%
				5150	37.09	36.05	2.89%	4.57	4.60	-0.71%
				5350	36.69	35.82	2.43%	4.78	4.80	-0.43%
F	6/5/2022	5250	Head	5250	37.43	35.93	4.17%	4.73	4.70	0.57%
				5150	37.67	36.05	4.50%	4.61	4.60	0.26%
				5350	37.26	35.82	4.02%	4.84	4.80	0.78%
F	6/8/2022	5250	Head	5250	36.67	35.93	2.05%	4.60	4.70	-2.21%
				5150	36.85	36.05	2.23%	4.48	4.60	-2.58%
				5350	36.48	35.82	1.85%	4.71	4.80	-1.88%
F	6/12/2022	5250	Head	5250	37.04	35.93	3.08%	4.58	4.70	-2.51%
				5150	37.28	36.05	3.42%	4.46	4.60	-3.00%
				5350	36.90	35.82	3.02%	4.68	4.80	-2.67%
F	6/16/2022	5250	Head	5250	37.15	35.93	3.39%	4.53	4.70	-3.75%
				5150	37.41	36.05	3.78%	4.41	4.60	-4.22%
				5350	36.91	35.82	3.05%	4.65	4.80	-3.21%
F	6/19/2022	5250	Head	5250	34.94	35.93	-2.76%	4.56	4.70	-3.07%
				5150	35.12	36.05	-2.57%	4.45	4.60	-3.24%
				5350	34.76	35.82	-2.96%	4.67	4.80	-2.90%
F	6/23/2022	5250	Head	5250	34.46	35.93	-4.10%	4.59	4.70	-2.36%
				5150	34.65	36.05	-3.88%	4.48	4.60	-2.60%
				5350	34.28	35.82	-4.30%	4.68	4.80	-2.51%
F	6/26/2022	5250	Head	5250	37.34	35.93	3.92%	4.71	4.70	0.17%
				5150	37.50	36.05	4.03%	4.59	4.60	-0.15%
				5350	37.15	35.82	3.72%	4.83	4.80	0.43%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
G	5/15/2022	5600	Head	5600	33.81	35.53	-4.85%	4.87	5.06	-3.80%
				5500	33.97	35.65	-4.71%	4.77	4.96	-3.87%
				5725	33.68	35.39	-4.84%	5.02	5.19	-3.32%
G	5/17/2022	5600	Head	5600	35.30	35.53	-0.66%	4.86	5.06	-3.96%
				5500	35.46	35.65	-0.53%	4.73	4.96	-4.52%
				5725	35.08	35.39	-0.88%	5.01	5.19	-3.36%
G	5/21/2022	5600	Head	5600	37.24	35.53	4.80%	4.95	5.06	-2.14%
				5500	37.41	35.65	4.94%	4.82	4.96	-2.76%
				5725	37.07	35.39	4.74%	5.14	5.19	-0.99%
G	5/25/2022	5600	Head	5600	37.09	35.53	4.38%	4.86	5.06	-3.92%
				5500	37.25	35.65	4.49%	4.74	4.96	-4.38%
				5725	36.89	35.39	4.23%	5.02	5.19	-3.28%
G	5/29/2022	5600	Head	5600	34.65	35.53	-2.49%	4.84	5.06	-4.29%
				5500	34.86	35.65	-2.21%	4.72	4.96	-4.90%
				5725	34.43	35.39	-2.72%	5.01	5.19	-3.51%
G	6/2/2022	5600	Head	5600	36.95	35.53	3.99%	5.10	5.06	0.75%
				5500	37.17	35.65	4.27%	4.96	4.96	-0.04%
				5725	36.75	35.39	3.84%	5.25	5.19	1.27%
G	6/5/2022	5600	Head	5600	34.23	35.53	-3.67%	4.89	5.06	-3.38%
				5500	34.44	35.65	-3.39%	4.76	4.96	-3.97%
				5725	34.02	35.39	-3.87%	5.03	5.19	-3.13%
G	6/9/2022	5600	Head	5600	35.28	35.53	-0.71%	5.06	5.06	-0.04%
				5500	35.45	35.65	-0.56%	4.94	4.96	-0.44%
				5725	35.01	35.39	-1.08%	5.21	5.19	0.44%
G	6/12/2022	5600	Head	5600	37.06	35.53	4.29%	4.86	5.06	-3.88%
				5500	37.25	35.65	4.49%	4.74	4.96	-4.40%
				5725	36.87	35.39	4.18%	5.01	5.19	-3.36%
G	6/16/2022	5600	Head	5600	36.06	35.53	1.48%	4.90	5.06	-3.23%
				5500	36.30	35.65	1.83%	4.75	4.96	-4.25%
				5725	35.91	35.39	1.47%	5.05	5.19	-2.60%
G	6/19/2022	5600	Head	5600	36.59	35.53	2.97%	4.83	5.06	-4.47%
				5500	36.74	35.65	3.06%	4.73	4.96	-4.52%
				5725	36.38	35.39	2.79%	4.99	5.19	-3.92%
G	6/23/2022	5600	Head	5600	35.64	35.53	0.30%	5.13	5.06	1.36%
				5500	35.83	35.65	0.51%	5.01	4.96	0.97%
				5725	35.38	35.39	-0.03%	5.28	5.19	1.85%
G	6/26/2022	5600	Head	5600	36.75	35.53	3.42%	5.14	5.06	1.58%
				5500	36.93	35.65	3.60%	5.03	4.96	1.45%
				5725	36.46	35.39	3.02%	5.29	5.19	1.98%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
H	5/15/2022	5750	Head	5750	36.71	35.36	3.81%	4.96	5.21	-4.79%
				5700	36.79	35.42	3.87%	4.91	5.16	-4.91%
				5850	36.60	35.30	3.68%	5.07	5.32	-4.79%
H	5/19/2022	5750	Head	5750	36.98	35.36	4.57%	5.09	5.21	-2.41%
				5700	37.04	35.42	4.57%	5.02	5.16	-2.74%
				5850	36.91	35.30	4.56%	5.20	5.32	-2.26%
H	5/22/2022	5750	Head	5750	35.63	35.36	0.76%	5.12	5.21	-1.89%
				5700	35.73	35.42	0.88%	5.06	5.16	-1.95%
				5850	35.48	35.30	0.51%	5.22	5.32	-1.84%
H	5/26/2022	5750	Head	5750	36.93	35.36	4.43%	5.14	5.21	-1.45%
				5700	37.02	35.42	4.52%	5.09	5.16	-1.46%
				5850	36.73	35.30	4.05%	5.26	5.32	-1.17%
H	5/29/2022	5750	Head	5750	35.52	35.36	0.44%	5.00	5.21	-4.10%
				5700	35.65	35.42	0.65%	4.93	5.16	-4.45%
				5850	35.36	35.30	0.17%	5.13	5.32	-3.57%
H	6/2/2022	5750	Head	5750	34.75	35.30	-1.59%	5.02	5.27	-3.61%
				5700	34.90	35.42	-1.47%	4.93	5.16	-4.58%
				5850	34.69	35.30	-1.73%	5.13	5.32	-3.63%
H	6/3/2022	2450	Head	2450	38.47	39.20	-1.86%	1.78	1.80	-1.33%
				2400	38.53	39.30	-1.95%	1.74	1.75	-0.61%
				2500	38.37	39.14	-1.96%	1.81	1.85	-2.16%
H	6/5/2022	5750	Head	5750	36.61	35.36	3.53%	5.09	5.21	-2.30%
				5700	36.69	35.42	3.59%	5.05	5.16	-2.14%
				5850	36.44	35.30	3.23%	5.20	5.32	-2.26%
H	6/8/2022	5750	Head	5750	35.94	35.36	1.63%	5.01	5.21	-3.91%
				5700	36.06	35.42	1.81%	4.94	5.16	-4.31%
				5850	35.79	35.30	1.39%	5.11	5.32	-3.95%
H	6/8/2022	2450	Head	2450	40.46	39.20	3.21%	1.74	1.80	-3.17%
				2400	40.53	39.30	3.14%	1.71	1.75	-2.61%
				2500	40.39	39.14	3.20%	1.78	1.85	-4.21%
H	6/12/2022	5750	Head	5750	36.98	35.36	4.57%	5.00	5.21	-4.12%
				5700	37.09	35.42	4.72%	4.92	5.16	-4.62%
				5850	36.90	35.30	4.53%	5.10	5.32	-4.15%
H	6/16/2022	5750	Head	5750	36.98	35.36	4.49%	4.99	5.21	-4.37%
				5700	37.07	35.42	4.66%	4.93	5.16	-4.43%
				5850	36.79	35.30	4.22%	5.10	5.32	-4.17%
H	6/19/2022	5750	Head	5750	36.57	35.36	3.41%	5.07	5.21	-2.76%
				5700	36.67	35.42	3.53%	5.02	5.16	-2.84%
				5850	36.44	35.30	3.23%	5.17	5.32	-2.76%
H	6/22/2022	2450	Head	2450	37.87	39.20	-3.39%	1.74	1.80	-3.33%
				2400	37.96	39.30	-3.40%	1.71	1.75	-2.66%
				2500	37.77	39.14	-3.49%	1.77	1.85	-4.48%
H	6/23/2022	5750	Head	5750	36.06	35.36	1.97%	5.01	5.21	-3.93%
				5700	36.19	35.42	2.17%	4.96	5.16	-3.96%
				5850	35.90	35.30	1.70%	5.11	5.32	-3.87%
H	6/26/2022	5750	Head	5750	35.68	35.36	0.90%	5.06	5.21	-3.01%
				5700	35.80	35.42	1.07%	4.99	5.16	-3.34%
				5850	35.55	35.30	0.71%	5.16	5.32	-2.97%
H	6/29/2022	2300	Head	2300	40.35	39.47	2.22%	1.65	1.66	-1.01%
				2350	40.30	39.38	2.32%	1.69	1.71	-1.33%
				2400	40.25	39.30	2.43%	1.72	1.75	-2.04%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
1	5/16/2022	2600	Head	2600	40.12	39.01	2.84%	1.89	1.96	-3.68%
				2495	40.37	39.14	3.13%	1.80	1.85	-2.63%
				2690	39.98	38.90	2.78%	1.96	2.06	-4.83%
1	5/19/2022	2600	Head	2600	38.82	39.01	-0.49%	1.89	1.96	-3.73%
				2495	39.00	39.14	-0.37%	1.80	1.85	-2.69%
				2690	38.67	38.90	-0.58%	1.96	2.06	-4.73%
1	5/22/2022	2600	Head	2600	39.23	39.01	0.56%	1.89	1.96	-3.47%
				2495	39.42	39.14	0.71%	1.80	1.85	-2.58%
				2690	39.07	38.90	0.44%	1.96	2.06	-4.68%
1	5/26/2022	2600	Head	2600	38.00	39.01	-2.59%	1.91	1.96	-2.81%
				2495	38.19	39.14	-2.44%	1.82	1.85	-1.66%
				2690	37.80	38.90	-2.82%	1.98	2.06	-4.05%
1	5/29/2022	2600	Head	2600	37.49	39.01	-3.90%	1.94	1.96	-1.13%
				2495	37.66	39.14	-3.79%	1.85	1.85	0.13%
				2690	37.31	38.90	-4.08%	2.01	2.06	-2.26%
1	6/2/2022	2600	Head	2600	37.93	39.01	-2.77%	1.89	1.96	-3.58%
				2495	38.12	39.14	-2.61%	1.81	1.85	-2.14%
				2690	37.76	38.90	-2.92%	1.96	2.06	-4.93%
1	6/5/2022	2600	Head	2600	37.82	39.01	-3.05%	1.91	1.96	-2.81%
				2495	38.04	39.14	-2.82%	1.83	1.85	-1.01%
				2690	37.68	38.90	-3.13%	1.98	2.06	-3.91%
1	6/9/2022	2600	Head	2600	37.57	39.01	-3.69%	1.92	1.96	-1.94%
				2495	37.71	39.14	-3.66%	1.84	1.85	-0.63%
				2690	37.40	38.90	-3.85%	2.00	2.06	-2.98%
1	6/12/2022	2600	Head	2600	37.83	39.0	-3.03%	2.02	1.96	2.74%
				2495	38.06	39.1	-2.77%	1.93	1.85	4.62%
				2690	37.65	38.9	-3.21%	2.09	2.06	1.34%
1	6/16/2022	2600	Head	2600	37.19	39.01	-4.67%	1.97	1.96	0.25%
				2495	37.39	39.14	-4.48%	1.89	1.85	2.07%
				2690	37.02	38.90	-4.83%	2.04	2.06	-1.19%
1	6/19/2022	2600	Head	2600	38.19	39.0	-2.10%	1.90	1.96	-2.96%
				2495	38.40	39.1	-1.90%	1.82	1.85	-1.77%
				2690	38.01	38.9	-2.28%	1.98	2.06	-3.91%
1	6/23/2022	2600	Head	2600	38.53	39.01	-1.23%	1.89	1.96	-3.47%
				2495	38.74	39.14	-1.03%	1.81	1.85	-1.93%
				2690	38.36	38.90	-1.38%	1.96	2.06	-4.88%
1	6/26/2022	2600	Head	2600	37.22	39.0	-4.59%	1.90	1.96	-3.42%
				2495	37.43	39.1	-4.38%	1.82	1.85	-1.71%
				2690	37.06	38.9	-4.72%	1.96	2.06	-4.83%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
2	6/16/2022	2600	Head	2600	38.45	39.01	-1.44%	2.00	1.96	1.88%
				2495	38.67	39.14	-1.21%	1.92	1.85	3.59%
				2690	38.27	38.90	-1.61%	2.08	2.06	0.80%
2	6/20/2022	2600	Head	2600	37.62	39.01	-3.57%	1.94	1.96	-1.13%
				2495	37.82	39.14	-3.38%	1.86	1.85	0.40%
				2690	37.44	38.90	-3.75%	2.01	2.06	-2.35%
2	6/23/2022	2600	Head	2600	40.62	39.01	4.12%	1.97	1.96	0.40%
				2495	40.81	39.14	4.26%	1.88	1.85	1.70%
				2690	40.42	38.90	3.91%	2.05	2.06	-0.46%
2	6/27/2022	2600	Head	2600	37.63	39.01	-3.54%	1.93	1.96	-1.89%
				2495	37.82	39.14	-3.38%	1.84	1.85	-0.36%
				2690	37.45	38.90	-3.72%	1.99	2.06	-3.18%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
3	5/18/2022	3500	Head	3500	38.20	37.93	0.71%	2.97	2.91	1.97%
				3400	38.28	38.04	0.62%	2.95	2.81	4.83%
				3600	37.47	37.82	-0.91%	3.08	3.01	2.09%
3	5/22/2022	3500	Head	3500	39.61	37.93	4.43%	2.80	2.91	-3.97%
				3400	39.71	38.04	4.38%	2.71	2.81	-3.68%
				3600	39.34	37.82	4.03%	2.91	3.01	-3.41%
3	5/26/2022	3500	Head	3500	39.26	37.93	3.51%	2.80	2.91	-3.80%
				3400	39.38	38.04	3.51%	2.75	2.81	-2.18%
				3600	38.88	37.82	2.81%	2.93	3.01	-2.82%
3	5/26/2022	3700	Head	3700	38.78	37.70	2.86%	3.00	3.12	-3.70%
				3600	38.88	37.82	2.81%	2.93	3.01	-2.82%
				3800	38.53	37.59	2.51%	3.12	3.22	-2.94%
3	5/28/2022	3900	Head	3900	38.06	37.47	1.57%	3.34	3.32	0.52%
				3800	38.23	37.59	1.71%	3.23	3.22	0.48%
				4000	37.88	37.36	1.39%	3.44	3.42	0.58%
3	5/29/2022	3500	Head	3500	39.00	37.93	2.82%	3.01	2.91	3.38%
				3400	39.21	38.04	3.07%	2.91	2.81	3.51%
				3600	38.81	37.82	2.63%	3.12	3.01	3.49%
3	6/1/2022	3700	Head	3700	36.74	37.70	-2.55%	3.01	3.12	-3.34%
				3600	36.92	37.82	-2.37%	2.92	3.01	-3.25%
				3800	36.56	37.59	-2.73%	3.11	3.22	-3.28%
3	6/5/2022	3500	Head	3500	39.02	37.93	2.87%	2.98	2.91	2.49%
				3400	39.45	38.04	3.70%	2.90	2.81	3.27%
				3600	38.97	37.82	3.05%	3.08	3.01	2.06%
3	6/5/2022	3700	Head	3700	38.72	37.70	2.70%	3.17	3.12	1.76%
				3600	38.97	37.82	3.05%	3.08	3.01	2.19%
				3800	38.41	37.59	2.19%	3.28	3.22	1.91%
3	6/9/2022	3500	Head	3500	37.08	37.93	-2.24%	2.82	2.91	-3.18%
				3400	37.29	38.04	-1.98%	2.74	2.81	-2.61%
				3600	36.91	37.82	-2.39%	2.91	3.01	-3.55%
3	6/9/2022	3700	Head	3700	36.73	37.70	-2.58%	3.00	3.12	-3.67%
				3600	36.91	37.82	-2.39%	2.91	3.01	-3.45%
				3800	36.55	37.59	-2.76%	3.10	3.22	-3.75%
3	6/12/2022	3500	Head	3500	37.15	37.93	-2.06%	2.78	2.91	-4.55%
				3400	37.34	38.04	-1.85%	2.70	2.81	-4.03%
				3600	36.98	37.82	-2.21%	2.87	3.01	-4.94%
3	6/12/2022	3700	Head	3700	37.43	37.70	-0.72%	2.98	3.12	-4.40%
				3600	37.61	37.82	-0.54%	2.89	3.01	-4.11%
				3800	37.26	37.59	-0.87%	3.07	3.22	-4.55%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
3	6/16/2022	3500	Head	3500	36.45	37.93	-3.90%	2.85	2.91	-2.01%
				3400	36.65	38.04	-3.66%	2.77	2.81	-1.50%
				3600	36.26	37.82	-4.11%	2.94	3.01	-2.42%
3	6/16/2022	3700	Head	3700	36.06	37.70	-4.35%	3.03	3.12	-2.73%
				3600	36.26	37.82	-4.11%	2.94	3.01	-2.45%
				3800	35.86	37.59	-4.60%	3.12	3.22	-2.97%
3	6/19/2022	3500	Head	3500	37.44	37.93	-1.29%	2.78	2.91	-4.62%
				3400	37.60	38.04	-1.17%	2.69	2.81	-4.10%
				3600	37.28	37.82	-1.42%	2.87	3.01	-4.94%
3	6/19/2022	3700	Head	3700	37.31	37.70	-1.04%	2.97	3.12	-4.82%
				3600	37.46	37.82	-0.94%	2.87	3.01	-4.71%
				3800	37.14	37.59	-1.19%	3.06	3.22	-4.80%
3	6/23/2022	3500	Head	3500	39.53	37.93	4.22%	2.80	2.91	-3.90%
				3400	39.71	38.04	4.38%	2.71	2.81	-3.43%
				3600	39.36	37.82	4.08%	2.89	3.01	-4.28%
3	6/23/2022	3700	Head	3700	39.20	37.70	3.97%	2.98	3.12	-4.50%
				3600	39.36	37.82	4.08%	2.89	3.01	-4.28%
				3800	39.03	37.59	3.84%	3.07	3.22	-4.58%
3	6/24/2022	2600	Head	2600	40.84	39.01	4.69%	1.95	1.96	-0.52%
				2495	41.03	39.14	4.82%	1.86	1.85	0.78%
				2690	40.68	38.90	4.58%	2.03	2.06	-1.58%
3	6/26/2022	3500	Head	3500	38.19	37.93	0.69%	2.78	2.91	-4.69%
				3400	38.39	38.04	0.91%	2.69	2.81	-4.28%
				3600	38.00	37.82	0.49%	2.86	3.01	-4.97%
3	6/26/2022	3700	Head	3700	38.05	37.70	0.92%	2.96	3.12	-4.88%
				3600	38.19	37.82	0.99%	2.88	3.01	-4.61%
				3800	37.82	37.59	0.62%	3.06	3.22	-4.99%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
4	5/16/2022	3500	Head	3500	39.08	37.93	3.03%	2.80	2.91	-3.90%
				3400	39.26	38.04	3.20%	2.71	2.81	-3.64%
				3600	38.91	37.82	2.89%	2.89	3.01	-4.01%
4	5/19/2022	3500	Head	3500	39.42	37.93	3.93%	2.78	2.91	-4.45%
				3400	39.55	38.04	3.96%	2.71	2.81	-3.71%
				3600	39.09	37.82	3.37%	2.88	3.01	-4.51%
4	5/22/2022	3500	Head	3500	39.63	37.93	4.48%	2.77	2.91	-4.93%
				3400	39.66	38.04	4.25%	2.68	2.81	-4.64%
				3600	39.38	37.82	4.14%	2.91	3.01	-3.61%
4	5/26/2022	3500	Head	3500	39.11	37.93	3.11%	2.95	2.91	1.39%
				3400	39.29	38.04	3.28%	2.85	2.81	1.56%
				3600	38.81	37.82	2.63%	3.08	3.01	2.03%
4	5/26/2022	3700	Head	3700	38.81	37.70	2.94%	3.20	3.12	2.53%
				3600	38.81	37.82	2.63%	3.08	3.01	2.03%
				3800	38.53	37.59	2.51%	3.32	3.22	3.25%
4	5/29/2022	3500	Head	3500	39.79	37.93	4.90%	2.77	2.91	-4.73%
				3400	39.94	38.04	4.98%	2.69	2.81	-4.35%
				3600	39.65	37.82	4.85%	2.87	3.01	-4.87%
4	5/29/2022	3700	Head	3700	39.51	37.70	4.80%	2.96	3.12	-4.98%
				3600	39.65	37.82	4.85%	2.87	3.01	-4.87%
				3800	39.35	37.59	4.69%	3.06	3.22	-4.89%
4	6/1/2022	3500	Head	3500	36.16	37.93	-4.67%	2.82	2.91	-3.08%
				3400	36.33	38.04	-4.50%	2.74	2.81	-2.47%
				3600	36.01	37.82	-4.77%	2.91	3.01	-3.31%
4	6/3/2022	3900	Head	3900	36.93	37.47	-1.45%	3.18	3.32	-4.30%
				3800	37.08	37.59	-1.35%	3.07	3.22	-4.71%
				4000	36.70	37.36	-1.76%	3.26	3.42	-4.80%
4	6/5/2022	3900	Head	3900	38.41	37.47	2.50%	3.17	3.32	-4.69%
				3800	38.58	37.59	2.64%	3.06	3.22	-4.86%
				4000	38.27	37.36	2.44%	3.26	3.42	-4.74%
4	6/5/2022	3500	Head	3500	39.09	37.93	3.06%	2.78	2.91	-4.45%
				3400	39.23	38.04	3.12%	2.70	2.81	-3.96%
				3600	38.88	37.82	2.81%	2.87	3.01	-4.71%
4	6/9/2022	3500	Head	3500	39.06	37.93	2.98%	2.78	2.91	-4.62%
				3400	39.22	38.04	3.09%	2.69	2.81	-4.17%
				3600	38.90	37.82	2.87%	2.87	3.01	-4.91%
4	6/9/2022	3500	Head	3900	39.30	37.47	4.87%	3.16	3.32	-4.75%
				3800	39.45	37.59	4.96%	3.06	3.22	-4.86%
				4000	39.15	37.36	4.79%	3.27	3.42	-4.59%
4	6/10/2022	3700	Head	3700	38.87	37.70	3.10%	2.96	3.12	-4.88%
				3600	39.03	37.82	3.21%	2.87	3.01	-4.74%
				3800	38.71	37.59	2.99%	3.06	3.22	-4.89%
4	6/12/2022	3500	Head	3500	37.04	37.93	-2.35%	2.78	2.91	-4.59%
				3400	37.22	38.04	-2.17%	2.70	2.81	-4.07%
				3600	36.85	37.82	-2.55%	2.87	3.01	-4.94%
4	6/12/2022	3700	Head	3700	36.95	37.70	-1.99%	2.97	3.12	-4.82%
				3600	37.13	37.82	-1.81%	2.88	3.01	-4.54%
				3800	36.77	37.59	-2.17%	3.06	3.22	-4.99%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
4	6/13/2022	3900	Head	3900	39.13	37.47	4.42%	3.20	3.32	-3.73%
				3800	39.29	37.59	4.53%	3.10	3.22	-3.68%
				4000	38.97	37.36	4.31%	3.30	3.42	-3.72%
4	6/16/2022	3500	Head	3500	38.94	37.93	2.66%	2.84	2.91	-2.36%
				3400	39.14	38.04	2.88%	2.75	2.81	-2.00%
				3600	38.76	37.82	2.50%	2.94	3.01	-2.55%
4	6/16/2022	3700	Head	3700	38.57	37.70	2.30%	3.03	3.12	-2.67%
				3600	38.76	37.82	2.50%	2.94	3.01	-2.45%
				3800	38.38	37.59	2.11%	3.13	3.22	-2.69%
4	6/16/2022	3900	Head	3900	38.21	37.47	1.97%	3.23	3.32	-2.62%
				3800	38.38	37.59	2.11%	3.13	3.22	-2.69%
				4000	38.03	37.36	1.80%	3.34	3.42	-2.52%
4	6/19/2022	3500	Head	3500	39.40	37.93	3.88%	2.77	2.91	-4.73%
				3400	39.57	38.04	4.01%	2.69	2.81	-4.28%
				3600	39.24	37.82	3.77%	2.86	3.01	-4.97%
4	6/19/2022	3700	Head	3700	39.12	37.70	3.76%	2.96	3.12	-4.92%
				3600	39.28	37.82	3.87%	2.87	3.01	-4.81%
				3800	38.96	37.59	3.65%	3.06	3.22	-4.89%
4	6/19/2022	3900	Head	3900	38.79	37.47	3.51%	3.16	3.32	-4.87%
				3800	38.96	37.59	3.65%	3.06	3.22	-4.93%
				4000	38.65	37.36	3.46%	3.26	3.42	-4.83%
4	6/23/2022	3500	Head	3500	39.71	37.93	4.69%	2.84	2.91	-2.39%
				3400	39.89	38.04	4.85%	2.75	2.81	-2.04%
				3600	39.54	37.82	4.56%	2.94	3.01	-2.62%
4	6/23/2022	3700	Head	3700	39.37	37.70	4.43%	3.03	3.12	-2.73%
				3600	39.54	37.82	4.56%	2.94	3.01	-2.62%
				3800	39.21	37.59	4.32%	3.13	3.22	-2.78%
4	6/23/2022	3900	Head	3900	39.05	37.47	4.21%	3.23	3.32	-2.71%
				3800	39.21	37.59	4.32%	3.13	3.22	-2.78%
				4000	38.89	37.36	4.10%	3.33	3.42	-2.60%
4	6/24/2022	2600	Head	2600	37.18	39.01	-4.69%	1.97	1.96	0.45%
				2495	37.37	39.14	-4.53%	1.89	1.85	2.18%
				2690	37.02	38.90	-4.83%	2.04	2.06	-0.99%
4	6/26/2022	3500	Head	3500	38.91	37.93	2.58%	2.81	2.91	-3.59%
				3400	39.14	38.04	2.88%	2.72	2.81	-3.07%
				3600	38.74	37.82	2.44%	2.90	3.01	-3.78%
4	6/26/2022	3700	Head	3700	38.58	37.70	2.33%	2.99	3.12	-4.05%
				3600	38.74	37.82	2.44%	2.90	3.01	-3.78%
				3800	38.37	37.59	2.08%	3.08	3.22	-4.24%
4	6/26/2022	3900	Head	3900	38.21	37.47	1.97%	3.19	3.32	-3.97%
				3800	38.37	37.59	2.08%	3.08	3.22	-4.30%
				4000	38.06	37.36	1.88%	3.28	3.42	-4.27%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
6	5/18/2022	3900	Head	3900	36.39	37.47	-2.89%	3.37	3.32	1.36%
				3800	36.88	37.59	-1.88%	3.28	3.22	1.88%
				4000	36.27	37.36	-2.92%	3.51	3.42	2.45%
6	5/22/2022	3900	Head	3900	36.50	37.47	-2.60%	3.31	3.32	-0.33%
				3800	36.59	37.59	-2.65%	3.20	3.22	-0.51%
				4000	36.20	37.36	-3.10%	3.45	3.42	0.84%
6	5/26/2022	3900	Head	3900	37.89	37.47	1.11%	3.24	3.32	-2.34%
				3800	38.08	37.59	1.31%	3.19	3.22	-1.01%
				4000	37.63	37.36	0.72%	3.42	3.42	-0.21%
6	5/28/2022	3500	Head	3500	39.59	37.93	4.38%	2.83	2.91	-2.97%
				3400	39.75	38.04	4.49%	2.74	2.81	-2.64%
				3600	39.44	37.82	4.30%	2.92	3.01	-3.12%
6	5/31/2022	3900	Head	3900	38.90	37.47	3.81%	3.40	3.32	2.32%
				3800	39.10	37.59	4.02%	3.28	3.22	2.03%
				4000	38.70	37.36	3.59%	3.51	3.42	2.59%
6	6/1/2022	3500	Head	3500	37.45	37.93	-1.26%	2.86	2.91	-1.77%
				3400	37.62	38.04	-1.11%	2.77	2.81	-1.29%
				3600	37.27	37.82	-1.44%	2.95	3.01	-2.05%
6	6/5/2022	3500	Head	3500	38.94	37.93	2.66%	2.79	2.91	-4.35%
				3400	39.14	38.04	2.88%	2.69	2.81	-4.35%
				3600	38.78	37.82	2.55%	2.87	3.01	-4.87%
6	6/5/2002	3900	Head	3900	39.17	37.47	4.53%	3.23	3.32	-2.83%
				3800	39.32	37.59	4.61%	3.11	3.22	-3.43%
				4000	38.96	37.36	4.28%	3.32	3.42	-3.16%
6	6/9/2022	3500	Head	3500	38.42	37.93	1.29%	2.78	2.91	-4.42%
				3400	38.60	38.04	1.46%	2.70	2.81	-3.93%
				3600	38.26	37.82	1.18%	2.87	3.01	-4.74%
6	6/9/2022	3900	Head	3900	37.77	37.47	0.79%	3.16	3.32	-4.78%
				3800	37.93	37.59	0.91%	3.06	3.22	-4.83%
				4000	37.62	37.36	0.70%	3.26	3.42	-4.74%
6	6/12/2022	3500	Head	3500	37.82	37.93	-0.29%	2.80	2.91	-3.73%
				3400	38.00	38.04	-0.11%	2.72	2.81	-3.21%
				3600	37.64	37.82	-0.46%	2.89	3.01	-4.08%
6	6/12/2022	3700	Head	3700	37.46	37.70	-0.64%	2.98	3.12	-4.37%
				3600	37.64	37.82	-0.46%	2.89	3.01	-4.08%
				3800	37.29	37.59	-0.79%	3.07	3.22	-4.52%
6	6/12/2022	3900	Head	3900	37.13	37.47	-0.92%	3.17	3.32	-4.57%
				3800	37.29	37.59	-0.79%	3.07	3.22	-4.52%
				4000	36.97	37.36	-1.04%	3.27	3.42	-4.59%
6	6/16/2022	3500	Head	3500	39.48	37.93	4.09%	2.82	2.91	-3.25%
				3400	39.66	38.04	4.25%	2.73	2.81	-2.86%
				3600	39.31	37.82	3.95%	2.91	3.01	-3.48%
6	6/16/2022	3700	Head	3700	39.14	37.70	3.82%	3.00	3.12	-3.58%
				3600	39.31	37.82	3.95%	2.91	3.01	-3.48%
				3800	38.97	37.59	3.68%	3.10	3.22	-3.59%
6	6/16/2022	3900	Head	3900	38.80	37.47	3.54%	3.21	3.32	-3.49%
				3800	38.97	37.59	3.68%	3.10	3.22	-3.59%
				4000	38.64	37.36	3.43%	3.31	3.42	-3.36%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
6	6/19/2022	3500	Head	3500	37.93	37.93	0.00%	2.78	2.91	-4.62%
				3400	38.09	38.04	0.12%	2.69	2.81	-4.21%
				3600	37.78	37.82	-0.09%	2.87	3.01	-4.84%
6	6/19/2022	3700	Head	3700	37.63	37.70	-0.19%	2.97	3.12	-4.85%
				3600	37.78	37.82	-0.09%	2.87	3.01	-4.84%
				3800	37.46	37.59	-0.34%	3.07	3.22	-4.74%
6	6/19/2022	3900	Head	3900	37.29	37.47	-0.49%	3.17	3.32	-4.54%
				3800	37.46	37.59	-0.34%	3.07	3.22	-4.74%
				4000	37.14	37.36	-0.59%	3.27	3.42	-4.42%
6	6/23/2022	3500	Head	3500	39.69	37.93	4.64%	2.81	2.91	-3.39%
				3400	39.90	38.04	4.88%	2.73	2.81	-2.86%
				3600	39.52	37.82	4.51%	2.90	3.01	-3.75%
6	6/23/2022	3700	Head	3700	39.35	37.70	4.37%	2.99	3.12	-3.95%
				3600	39.52	37.82	4.51%	2.90	3.01	-3.75%
				3800	39.16	37.59	4.18%	3.09	3.22	-3.90%
6	6/23/2022	3900	Head	3900	38.99	37.47	4.05%	3.19	3.32	-3.94%
				3800	39.16	37.59	4.18%	3.09	3.22	-3.90%
				4000	38.84	37.36	3.96%	3.29	3.42	-3.89%
6	6/24/2022	2600	Head	2600	40.17	39.01	2.97%	2.00	1.96	1.78%
				2495	40.37	39.14	3.13%	1.91	1.85	3.32%
				2690	40.00	38.90	2.83%	2.07	2.06	0.46%
6	6/26/2022	3500	Head	3500	37.79	37.93	-0.37%	2.77	2.91	-4.83%
				3400	38.03	38.04	-0.04%	2.69	2.81	-4.10%
				3600	37.61	37.82	-0.54%	2.86	3.01	-4.97%
6	6/26/2022	3700	Head	3700	37.95	37.70	0.66%	2.96	3.12	-4.92%
				3600	38.07	37.82	0.67%	2.88	3.01	-4.51%
				3800	37.69	37.59	0.27%	3.06	3.22	-4.96%
6	6/26/2022	3900	Head	3900	37.84	37.47	0.98%	3.17	3.32	-4.54%
				3800	37.98	37.59	1.04%	3.07	3.22	-4.55%
				4000	37.65	37.36	0.78%	3.26	3.42	-4.74%
6	6/29/2022	2450	Head	2450	39.19	39.20	-0.03%	1.81	1.80	0.28%
				2400	39.26	39.30	-0.09%	1.77	1.75	0.76%
				2500	39.10	39.14	-0.09%	1.84	1.85	-0.60%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
8	5/16/2022	2600	Head	2600	40.85	39.01	4.71%	1.90	1.96	-3.42%
				2495	41.07	39.14	4.92%	1.80	1.85	-2.85%
				2690	40.69	38.90	4.61%	1.96	2.06	-4.98%
8	5/19/2022	2600	Head	2600	39.94	39.01	2.38%	1.90	1.96	-3.12%
				2495	40.13	39.14	2.52%	1.81	1.85	-2.20%
				2690	39.79	38.90	2.30%	1.97	2.06	-4.20%
8	5/22/2022	2600	Head	2600	37.66	39.01	-3.46%	1.99	1.96	1.37%
				2495	37.74	39.14	-3.58%	1.91	1.85	3.48%
				2690	37.40	38.90	-3.85%	2.07	2.06	0.61%
8	5/24/2022	2450	Head	2450	38.17	39.20	-2.63%	1.77	1.80	-1.56%
				2400	38.25	39.30	-2.66%	1.73	1.75	-1.18%
				2500	38.08	39.14	-2.70%	1.81	1.85	-2.21%
8	5/26/2022	2600	Head	2600	40.25	39.01	3.18%	1.92	1.96	-2.35%
				2495	40.45	39.14	3.34%	1.82	1.85	-1.55%
				2690	40.09	38.90	3.07%	1.99	2.06	-3.42%
8	5/29/2022	2600	Head	2600	38.22	39.01	-2.03%	1.89	1.96	-3.47%
				2495	38.39	39.14	-1.92%	1.82	1.85	-1.66%
				2690	38.07	38.90	-2.13%	1.96	2.06	-4.98%
8	5/31/2022	2450	Head	2450	37.37	39.20	-4.67%	1.82	1.80	0.83%
				2400	37.48	39.30	-4.62%	1.77	1.75	1.28%
				2500	37.29	39.14	-4.72%	1.85	1.85	-0.27%
8	6/2/2022	2600	Head	2600	37.68	39.01	-3.41%	2.02	1.96	2.69%
				2495	37.88	39.14	-3.23%	1.93	1.85	4.29%
				2690	37.50	38.90	-3.59%	2.09	2.06	1.29%
8	6/5/2022	2600	Head	2600	38.01	39.01	-2.57%	2.02	1.96	3.15%
				2495	38.25	39.14	-2.28%	1.93	1.85	4.29%
				2690	37.85	38.90	-2.69%	2.09	2.06	1.29%
8	6/7/2022	2450	Head	2450	38.84	39.20	-0.92%	1.75	1.80	-2.67%
				2400	38.90	39.30	-1.01%	1.72	1.75	-1.92%
				2500	38.78	39.14	-0.91%	1.79	1.85	-3.62%
8	6/9/2022	2600	Head	2600	38.59	39.01	-1.08%	1.89	1.96	-3.52%
				2495	38.79	39.14	-0.90%	1.80	1.85	-2.74%
				2690	38.39	38.90	-1.30%	1.98	2.06	-4.10%
8	6/11/2022	2450	Head	2450	37.77	39.20	-3.65%	1.79	1.80	-0.72%
				2400	37.85	39.30	-3.68%	1.75	1.75	0.02%
				2500	37.68	39.14	-3.72%	1.82	1.85	-1.73%
8	6/12/2022	2600	Head	2600	40.59	39.01	4.05%	2.00	1.96	1.83%
				2495	40.83	39.14	4.31%	1.91	1.85	3.54%
				2690	40.42	38.90	3.91%	2.07	2.06	0.66%
8	6/15/2022	2450	Head	2450	37.90	39.20	-3.32%	1.77	1.80	-1.94%
				2400	37.99	39.30	-3.33%	1.73	1.75	-1.52%
				2500	37.81	39.14	-3.39%	1.80	1.85	-2.86%
8	6/18/2022	2600	Head	2600	39.87	39.01	2.20%	1.89	1.96	-3.58%
				2495	40.08	39.14	2.39%	1.81	1.85	-1.93%
				2690	39.73	38.90	2.14%	1.97	2.06	-4.49%
8	6/19/2022	2450	Head	2450	37.36	39.20	-4.69%	1.78	1.80	-1.22%
				2400	37.48	39.30	-4.62%	1.74	1.75	-0.78%
				2500	37.25	39.14	-4.82%	1.81	1.85	-2.16%
8	6/22/2022	2600	Head	2600	37.45	39.01	-4.00%	1.91	1.96	-2.66%
				2495	37.67	39.14	-3.76%	1.82	1.85	-1.33%
				2690	37.26	38.90	-4.21%	1.98	2.06	-3.76%
8	6/23/2022	2450	Head	2450	38.54	39.20	-1.68%	1.81	1.80	0.39%
				2400	38.63	39.30	-1.70%	1.77	1.75	1.16%
				2500	38.46	39.14	-1.73%	1.84	1.85	-0.70%
8	6/27/2022	2450	Head	2450	38.33	39.20	-2.22%	1.78	1.80	-1.28%
				2400	38.41	39.30	-2.26%	1.74	1.75	-0.72%
				2500	38.26	39.14	-2.24%	1.81	1.85	-2.16%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
10	5/25/2022	750	Head	750	40.47	41.96	-3.55%	0.89	0.89	-0.90%
				660	40.82	42.42	-3.78%	0.86	0.89	-3.37%
				800	40.27	41.71	-3.44%	0.90	0.90	0.25%
10	5/29/2022	750	Head	750	42.51	41.96	1.31%	0.87	0.89	-2.27%
				660	43.11	42.42	1.62%	0.85	0.89	-4.45%
				800	42.43	41.71	1.74%	0.89	0.90	-0.87%
10	6/2/2022	750	Head	750	39.88	41.96	-4.96%	0.92	0.89	2.82%
				660	40.55	42.42	-4.42%	0.89	0.89	0.41%
				800	39.68	41.71	-4.86%	0.94	0.90	5.14%
10	6/5/2022	750	Head	750	41.93	41.96	-0.08%	0.89	0.89	0.20%
				660	42.95	42.42	1.24%	0.90	0.89	1.35%
				800	41.56	41.71	-0.35%	0.93	0.90	3.20%
10	6/9/2022	750	Head	750	42.51	41.96	1.31%	0.92	0.89	3.00%
				660	43.47	42.42	2.47%	0.90	0.89	1.60%
				800	42.68	41.71	2.34%	0.94	0.90	4.47%
10	6/12/2022	750	Head	750	41.93	41.96	-0.08%	0.89	0.89	-0.81%
				660	42.83	42.42	0.96%	0.85	0.89	-4.09%
				800	41.88	41.71	0.42%	0.90	0.90	0.38%
10	6/14/2022	1750	Head	1750	38.50	40.08	-3.95%	1.36	1.37	-0.95%
				1695	38.58	40.17	-3.96%	1.32	1.34	-1.27%
				1755	38.50	40.08	-3.93%	1.36	1.37	-0.93%
10	6/15/2022	1900	Head	1900	40.41	40.00	1.02%	1.39	1.40	-0.64%
				1850	40.51	40.00	1.28%	1.36	1.40	-2.93%
				1920	40.38	40.00	0.95%	1.40	1.40	0.21%
10	6/16/2022	750	Head	750	41.70	41.96	-0.62%	0.90	0.89	0.42%
				660	42.24	42.42	-0.43%	0.86	0.89	-2.71%
				800	41.56	41.71	-0.35%	0.92	0.90	2.15%
10	6/19/2022	750	Head	750	45.45	41.96	8.31%	0.87	0.89	-2.08%
				660	46.09	42.42	8.64%	0.85	0.89	-4.54%
				800	45.35	41.71	8.74%	0.89	0.90	-0.38%
10	6/23/2022	750	Head	750	43.14	41.96	2.81%	0.89	0.89	0.06%
				660	43.58	42.42	2.73%	0.86	0.89	-2.78%
				800	43.01	41.71	3.13%	0.92	0.90	2.02%
10	6/27/2022	750	Head	750	40.67	41.96	-3.08%	0.87	0.89	-2.19%
				660	40.96	42.42	-3.45%	0.84	0.89	-4.69%
				800	40.55	41.71	-2.77%	0.89	0.90	-0.45%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
11	5/26/2022	835	Head	835	41.29	41.50	-0.51%	0.89	0.90	-1.23%
				805	41.57	41.68	-0.26%	0.88	0.90	-1.57%
				850	41.20	41.50	-0.72%	0.89	0.92	-2.47%
11	5/31/2022	835	Head	835	41.44	41.50	-0.14%	0.93	0.90	3.09%
				805	41.51	41.68	-0.41%	0.92	0.90	2.26%
				850	41.42	41.50	-0.19%	0.93	0.92	1.93%
11	6/2/2022	835	Head	835	43.20	41.50	4.10%	0.92	0.90	2.54%
				805	43.44	41.68	4.22%	0.91	0.90	0.95%
				850	43.12	41.50	3.90%	0.94	0.92	2.19%
11	6/5/2022	835	Head	835	39.53	41.50	-4.75%	0.94	0.90	4.92%
				805	39.63	41.68	-4.92%	0.93	0.90	3.78%
				850	39.52	41.50	-4.77%	0.95	0.92	4.36%
11	6/9/2022	835	Head	835	40.07	41.50	-3.45%	0.91	0.90	1.36%
				805	40.13	41.68	-3.72%	0.90	0.90	0.46%
				850	40.05	41.50	-3.49%	0.90	0.92	-1.49%
11	6/12/2022	835	Head	835	42.86	41.50	3.28%	0.93	0.90	3.76%
				805	42.86	41.68	2.83%	0.92	0.90	2.52%
				850	42.83	41.50	3.20%	0.94	0.92	2.85%
11	6/15/2022	835	Head	835	41.04	41.50	-1.11%	0.92	0.90	2.56%
				805	41.16	41.68	-1.25%	0.91	0.90	1.44%
				850	40.98	41.50	-1.25%	0.93	0.92	1.40%
11	6/20/2022	835	Head	835	39.95	41.50	-3.73%	0.89	0.90	-1.32%
				805	39.97	41.68	-4.10%	0.88	0.90	-2.26%
				850	39.94	41.50	-3.76%	0.89	0.92	-2.43%
11	6/24/2022	835	Head	835	43.23	41.50	4.17%	0.91	0.90	1.38%
				805	43.24	41.68	3.74%	0.90	0.90	0.55%
				850	43.22	41.50	4.14%	0.92	0.92	0.32%
11	6/26/2022	750	Head	750	40.24	41.96	-4.10%	0.90	0.89	0.46%
				660	42.66	42.42	0.56%	0.85	0.89	-3.94%
				800	40.54	41.71	-2.79%	0.91	0.90	1.71%
11	6/28/2022	835	Head	835	39.67	41.50	-4.41%	0.93	0.90	3.11%
				805	39.78	41.68	-4.56%	0.92	0.90	2.28%
				850	39.64	41.50	-4.48%	0.93	0.92	1.89%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
12	5/25/2022	835	Head	835	41.16	41.50	-0.82%	0.93	0.90	3.33%
				805	41.24	41.68	-1.05%	0.92	0.90	2.64%
				850	41.13	41.50	-0.89%	0.94	0.92	2.67%
12	5/27/2022	750	Head	750	42.91	41.96	2.26%	0.86	0.85	0.59%
				660	43.45	42.42	2.42%	0.82	0.82	0.65%
				800	42.67	41.71	2.31%	0.87	0.87	0.48%
12	5/31/2022	750	Head	750	38.07	41.96	-9.27%	0.92	0.89	2.62%
				660	38.36	42.42	-9.58%	0.88	0.89	-0.31%
				800	37.80	41.71	-9.36%	0.93	0.90	4.02%
12	5/31/2022	835	Head	835	37.70	41.50	-9.16%	0.94	0.90	4.99%
				805	37.78	41.68	-9.36%	0.93	0.90	4.17%
				850	37.65	41.50	-9.28%	0.95	0.92	3.80%
12	6/2/2022	750	Head	750	42.10	41.96	0.33%	0.87	0.89	-2.44%
				660	42.31	42.42	-0.27%	0.84	0.89	-4.90%
				800	41.90	41.71	0.47%	0.88	0.90	-1.41%
12	6/2/2022	835	Head	835	41.83	41.50	0.80%	0.90	0.90	-0.06%
				805	41.88	41.68	0.48%	0.89	0.90	-1.22%
				850	41.81	41.50	0.75%	0.91	0.92	-1.03%
12	6/5/2022	750	Head	750	41.04	41.96	-2.20%	0.83	0.89	-7.14%
				660	41.32	42.42	-2.60%	0.80	0.89	-9.55%
				800	40.84	41.71	-2.07%	0.85	0.90	-5.54%
12	6/6/2022	750	Head	750	42.32	41.96	0.85%	0.88	0.89	-1.96%
				660	42.54	42.42	0.28%	0.84	0.89	-4.71%
				800	42.15	41.71	1.07%	0.88	0.90	-2.38%
12	6/9/2022	750	Head	750	40.73	41.96	-2.93%	0.87	0.89	-2.26%
				660	42.06	42.42	-0.86%	0.85	0.89	-4.43%
				800	40.78	41.71	-2.22%	0.89	0.90	-0.62%
12	6/9/2022	1640	Head	1640	40.41	40.25	0.39%	1.28	1.31	-2.37%
				1625	40.45	40.28	0.43%	1.27	1.30	-2.35%
				1665	40.35	40.22	0.33%	1.29	1.32	-2.58%
12	6/12/2022	1640	Head	1640	39.70	40.25	-1.38%	1.31	1.31	0.08%
				1625	39.75	40.28	-1.30%	1.30	1.30	0.20%
				1665	39.64	40.22	-1.43%	1.32	1.32	-0.23%
12	6/15/2022	750	Head	750	41.59	41.96	-0.89%	0.89	0.89	-0.30%
				660	41.86	42.42	-1.33%	0.86	0.89	-2.88%
				800	41.50	41.71	-0.49%	0.91	0.90	1.19%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
12	6/17/2022	1640	Head	1640	41.53	40.25	3.17%	1.29	1.31	-1.52%
				1625	41.57	40.28	3.21%	1.28	1.30	-1.65%
				1665	41.49	40.22	3.17%	1.30	1.32	-1.59%
12	6/20/2022	750	Head	750	42.89	41.96	2.21%	0.88	0.89	-1.15%
				660	43.47	42.42	2.47%	0.85	0.89	-4.52%
				800	42.70	41.71	2.39%	0.90	0.90	-0.09%
12	6/21/2022	1640	Head	1640	38.59	40.25	-4.13%	1.29	1.31	-1.52%
				1625	38.62	40.28	-4.11%	1.28	1.30	-1.50%
				1665	38.53	40.22	-4.19%	1.30	1.32	-1.74%
12	6/24/2022	750	Head	750	42.22	41.96	0.62%	0.90	0.89	1.13%
				660	42.56	42.42	0.32%	0.87	0.89	-2.05%
				800	41.99	41.71	0.68%	0.92	0.90	2.54%
12	6/24/2022	1640	Head	1640	41.04	40.25	1.95%	1.33	1.31	1.38%
				1625	41.06	40.28	1.94%	1.32	1.30	1.35%
				1665	41.00	40.22	1.95%	1.34	1.32	1.28%
12	6/27/2022	750	Head	750	39.77	39.77	0.00%	0.88	0.89	-1.78%
				660	40.54	42.42	-4.44%	0.85	0.89	-4.62%
				800	39.66	41.71	-4.90%	0.89	0.90	-1.02%
12	7/14/2022	1640	Head	1640	39.07	40.25	-2.94%	1.26	1.31	-3.82%
				1625	39.12	40.28	-2.87%	1.25	1.30	-3.66%
				1665	39.02	40.22	-2.97%	1.27	1.32	-4.24%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
13	6/3/2022	835	Head	835	39.58	41.50	-4.63%	0.91	0.90	0.83%
				805	39.68	41.68	-4.80%	0.90	0.90	-0.11%
				850	39.52	41.50	-4.77%	0.91	0.92	-0.42%
13	6/7/2022	835	Head	835	40.06	41.50	-3.47%	0.87	0.90	-2.92%
				805	40.07	41.68	-3.86%	0.86	0.90	-3.82%
				850	40.05	41.50	-3.49%	0.88	0.92	-4.00%
13	6/9/2022	835	Head	835	41.13	41.50	-0.89%	0.90	0.90	-0.56%
				805	41.18	41.68	-1.20%	0.88	0.90	-1.43%
				850	41.10	41.50	-0.96%	0.90	0.92	-1.70%
13	6/12/2022	835	Head	835	41.12	41.50	-0.92%	0.91	0.90	1.19%
				805	41.11	41.68	-1.37%	0.90	0.90	-0.01%
				850	41.09	41.50	-0.99%	0.92	0.92	0.31%
13	6/14/2022	2600	Head	2600	39.95	39.01	2.41%	1.94	1.96	-0.98%
				2495	40.18	39.14	2.65%	1.86	1.85	0.51%
				2690	39.80	38.90	2.32%	2.02	2.06	-1.96%
13	6/16/2022	835	Head	835	40.22	41.50	-3.08%	0.91	0.90	1.28%
				805	40.25	41.68	-3.43%	0.90	0.90	0.00%
				850	40.17	41.50	-3.20%	0.92	0.92	0.30%
13	6/20/2022	835	Head	835	40.96	41.50	-1.30%	0.88	0.90	-2.31%
				805	40.96	41.68	-1.73%	0.88	0.90	-2.02%
				850	40.97	41.50	-1.28%	0.90	0.92	-2.08%
13	6/24/2022	835	Head	835	42.98	41.50	3.57%	0.90	0.90	0.27%
				805	43.05	41.68	3.29%	0.89	0.90	-0.54%
				850	42.95	41.50	3.49%	0.91	0.92	-0.92%
13	6/27/2022	835	Head	835	39.59	41.50	-4.60%	0.93	0.90	3.03%
				805	39.62	41.68	-4.94%	0.92	0.90	1.99%
				850	39.54	41.50	-4.72%	0.93	0.92	1.92%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
PHD 30A	5/26/2022	835	Head	835	42.90	41.50	3.37%	0.93	0.90	3.14%
				805	43.01	41.68	3.19%	0.92	0.90	2.17%
				850	42.87	41.50	3.30%	0.93	0.92	2.10%
PHD 30A	5/31/2022	835	Head	835	42.36	41.50	2.07%	0.93	0.90	2.97%
				805	42.48	41.68	1.92%	0.92	0.90	2.09%
				850	42.32	41.50	1.98%	0.93	0.92	2.12%

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta	Measured	Target	Delta
PHD 30B	5/26/2022	750	Head	750	43.24	41.96	3.05%	0.90	0.89	0.22%
				660	43.72	42.42	3.06%	0.85	0.89	-4.49%
				800	43.08	41.71	3.30%	0.91	0.90	1.64%
PHD 30B	5/31/2022	750	Head	750	42.42	41.96	1.09%	0.91	0.89	1.97%
				660	42.81	42.42	0.91%	0.88	0.89	-0.97%
				800	42.29	41.71	1.40%	0.93	0.90	3.57%

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
A	5/16/2022	Head	D1900V2 SN:5d163	9/29/2022	3.880	38.80	40.61	-4.46%	2.010	20.10	21.02	-4.38%	
A	5/18/2022	Head	D1900V2 SN:5d163	9/29/2022	4.090	40.90	40.61	0.71%	2.110	21.10	21.02	0.38%	
A	5/22/2022	Head	D1900V2 SN:5d163	9/29/2022	4.300	43.00	40.61	5.89%	2.220	22.20	21.02	5.61%	
A	5/26/2022	Head	D1900V2 SN:5d163	9/29/2022	3.970	39.70	40.61	-2.24%	2.050	20.50	21.02	-2.47%	
A	5/29/2022	Head	D1900V2 SN:5d163	9/29/2022	4.120	41.20	40.61	1.45%	2.130	21.30	21.02	1.33%	
A	6/2/2022	Head	D1900V2 SN:5d163	9/29/2022	3.940	39.40	40.61	-2.98%	2.030	20.30	21.02	-3.43%	
A	6/5/2022	Head	D1900V2 SN:5d163	9/29/2022	4.400	44.00	40.61	8.35%	2.290	22.90	21.02	8.94%	1
A	6/9/2022	Head	D1900V2 SN:5d163	9/29/2022	4.070	40.70	40.61	0.22%	2.120	21.20	21.02	0.86%	
A	6/12/2022	Head	D1900V2 SN:5d163	9/29/2022	4.280	42.80	40.61	5.39%	2.220	22.20	21.02	5.61%	
A	6/16/2022	Head	D1900V2 SN:5d163	9/29/2022	4.040	40.40	40.61	-0.52%	2.110	21.10	21.02	0.38%	
A	6/19/2022	Head	D1900V2 SN:5d163	9/29/2022	4.240	42.40	40.61	4.41%	2.170	21.70	21.02	3.24%	
A	6/23/2022	Head	D1900V2 SN:5d163	9/29/2022	4.070	40.70	40.61	0.22%	2.110	21.10	21.02	0.38%	
A	6/26/2022	Head	D1900V2 SN:5d163	9/29/2022	4.200	42.00	40.61	3.42%	2.210	22.10	21.02	5.14%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
B	5/16/2022	Head	D1750V2 SN:1077	9/29/2022	3.950	39.50	36.59	7.95%	2.090	20.90	19.51	7.12%	
B	5/18/2022	Head	D1750V2 SN:1077	9/29/2022	3.590	35.90	36.59	-1.89%	1.900	19.00	19.51	-2.61%	
B	5/22/2022	Head	D1750V2 SN:1077	9/29/2022	3.650	36.50	36.59	-0.25%	1.930	19.30	19.51	-1.08%	
B	5/26/2022	Head	D1750V2 SN:1077	9/29/2022	3.420	34.20	36.59	-6.53%	1.800	18.00	19.51	-7.74%	
B	5/29/2022	Head	D1750V2 SN:1077	9/29/2022	3.750	37.50	36.59	2.49%	1.980	19.80	19.51	1.49%	
B	6/2/2022	Head	D1750V2 SN:1077	9/29/2022	3.390	33.90	36.59	-7.35%	1.800	18.00	19.51	-7.74%	
B	6/5/2022	Head	D1750V2 SN:1077	9/29/2022	3.760	37.60	36.59	2.76%	1.980	19.80	19.51	1.49%	
B	6/9/2022	Head	D1750V2 SN:1077	9/29/2022	3.760	37.60	36.59	2.76%	1.970	19.70	19.51	0.97%	
B	6/12/2022	Head	D1750V2 SN:1077	9/29/2022	3.810	38.10	36.59	4.13%	2.000	20.00	19.51	2.51%	
B	6/16/2022	Head	D1750V2 SN:1077	9/29/2022	3.590	35.90	36.59	-1.89%	1.890	18.90	19.51	-3.13%	
B	6/19/2022	Head	D1750V2 SN:1077	9/29/2022	3.740	37.40	36.59	2.21%	1.940	19.40	19.51	-0.56%	
B	6/23/2022	Head	D1750V2 SN:1077	9/29/2022	3.360	33.60	36.59	-8.17%	1.770	17.70	19.51	-9.28%	2
B	6/26/2022	Head	D1750V2 SN:1077	9/29/2022	3.760	37.60	36.59	2.76%	1.980	19.80	19.51	1.49%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	
C	5/16/2022	Head	D1900V2 SN:5d140	4/28/2023	3.940	39.40	39.60	-0.51%	2.020	20.20	20.70	-2.42%	
C	5/16/2022	Head	D1750V2 SN:1053	9/29/2022	3.460	34.60	36.82	-6.03%	1.830	18.30	19.67	-6.96%	3
C	5/18/2022	Head	D1750V2 SN:1050	4/27/2023	3.650	36.50	36.40	0.27%	1.930	19.30	19.10	1.05%	
C	5/18/2022	Head	D1900V2 SN:5d140	4/28/2023	4.100	41.00	39.60	3.54%	2.110	21.10	20.70	1.93%	
C	5/22/2022	Head	D1750V2 SN:1050	4/27/2023	3.820	38.20	36.40	4.95%	2.020	20.20	19.10	5.76%	
C	5/22/2022	Head	D1900V2 SN:5d140	4/28/2023	4.280	42.80	39.60	8.08%	2.200	22.00	20.70	6.28%	
C	5/26/2022	Head	D1750V2 SN:1050	4/27/2023	3.560	35.60	36.40	-2.20%	1.870	18.70	19.10	-2.09%	
C	5/26/2022	Head	D1900V2 SN:5d140	4/28/2023	4.310	43.10	39.60	8.84%	2.200	22.00	20.70	6.28%	4
C	5/29/2022	Head	D1750V2 SN:1050	4/27/2023	3.690	36.90	36.40	1.37%	1.940	19.40	19.10	1.57%	
C	5/29/2022	Head	D1900V2 SN:5d140	4/28/2023	4.080	40.80	39.60	3.03%	2.110	21.10	20.70	1.93%	
C	6/2/2022	Head	D1900V2 SN:5d140	4/28/2023	4.270	42.70	39.60	7.83%	2.190	21.90	20.70	5.80%	
C	6/2/2022	Head	D1750V2 SN:1050	4/27/2023	3.810	38.10	36.40	4.67%	2.000	20.00	19.10	4.71%	
C	6/5/2022	Head	D1750V2 SN:1050	4/27/2023	3.790	37.90	36.40	4.12%	2.000	20.00	19.10	4.71%	
C	6/5/2022	Head	D1900V2 SN:5d163	9/29/2022	4.250	42.50	40.61	4.65%	2.180	21.80	21.02	3.71%	
C	6/9/2022	Head	D1750V2 SN:1050	4/27/2023	3.590	35.90	36.40	-1.37%	1.880	18.80	19.10	-1.57%	
C	6/9/2022	Head	D1900V2 SN:5d163	9/29/2022	4.000	40.00	40.61	-1.50%	2.050	20.50	21.02	-2.47%	
C	6/12/2022	Head	D1750V2 SN:1050	4/27/2023	3.440	34.40	36.40	-5.49%	1.840	18.40	19.10	-3.66%	
C	6/12/2022	Head	D1900V2 SN:5d163	9/29/2022	4.140	41.40	40.61	1.95%	2.120	21.20	21.02	0.86%	
C	6/16/2022	Head	D1750V2 SN:1050	4/27/2023	3.650	36.50	36.40	0.27%	1.910	19.10	19.10	0.00%	
C	6/16/2022	Head	D1900V2 SN:5d163	9/29/2022	4.030	40.30	40.61	-0.76%	2.060	20.60	21.02	-2.00%	
C	6/19/2022	Head	D1900V2 SN:5d163	9/29/2022	3.860	38.60	40.61	-4.95%	2.010	20.10	21.02	-4.38%	5
C	6/19/2022	Head	D1750V2 SN:1050	4/27/2023	3.940	39.40	36.40	8.24%	2.080	20.80	19.10	8.90%	6
C	6/23/2022	Head	D1750V2 SN:1050	4/27/2023	3.660	36.60	36.40	0.55%	1.930	19.30	19.10	1.05%	
C	6/23/2022	Head	D1900V2 SN:5d163	9/29/2022	4.250	42.50	40.61	4.65%	2.180	21.80	21.02	3.71%	
C	6/26/2022	Head	D1750V2 SN:1050	4/27/2023	3.370	33.70	36.40	-7.42%	1.810	18.10	19.10	-5.24%	
C	6/26/2022	Head	D1900V2 SN:5d163	9/29/2022	4.080	40.80	40.61	0.47%	2.100	21.00	21.02	-0.10%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	
D	5/16/2022	Head	D2300V2 SN:1002	4/25/2023	5.080	50.80	48.90	3.89%	2.430	24.30	23.80	2.10%	
D	5/18/2022	Head	D2300V2 SN:1058	9/29/2022	5.080	50.80	50.56	0.47%	2.450	24.50	24.52	-0.08%	
D	5/22/2022	Head	D2300V2 SN:1058	9/29/2022	4.990	49.90	50.56	-1.31%	2.400	24.00	24.52	-2.12%	
D	5/26/2022	Head	D2300V2 SN:1002	4/25/2023	4.880	48.80	48.90	-0.20%	2.340	23.40	23.80	-1.68%	
D	5/29/2022	Head	D2300V2 SN:1002	4/25/2023	5.150	51.50	48.90	5.32%	2.500	25.00	23.80	5.04%	
D	6/2/2022	Head	D2300V2 SN:1002	4/25/2023	5.220	52.20	48.90	6.75%	2.500	25.00	23.80	5.04%	7
D	6/5/2022	Head	D2300V2 SN:1002	4/25/2023	4.610	46.10	48.90	-5.73%	2.290	22.90	23.80	-3.78%	
D	6/9/2022	Head	D2300V2 SN:1058	9/29/2022	5.440	54.40	50.56	7.59%	2.590	25.90	24.52	5.63%	8
D	6/12/2022	Head	D2300V2 SN:1058	9/29/2022	4.950	49.50	50.56	-2.10%	2.370	23.70	24.52	-3.34%	
D	6/16/2022	Head	D2300V2 SN:1058	9/29/2022	4.940	49.40	50.56	-2.29%	2.350	23.50	24.52	-4.16%	
D	6/19/2022	Head	D2300V2 SN:1058	9/29/2022	4.830	48.30	50.56	-4.47%	2.300	23.00	24.52	-6.20%	
D	6/23/2022	Head	D2300V2 SN:1058	9/29/2022	5.100	51.00	50.56	0.87%	2.440	24.40	24.52	-0.49%	
D	6/26/2022	Head	D2300V2 SN:1058	9/29/2022	4.900	49.00	50.56	-3.09%	2.340	23.40	24.52	-4.57%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
E	5/15/2022	Head	D2450V2 SN:748	2/22/2023	5.380	53.80	52.40	2.67%	2.500	25.00	24.40	2.46%	9
E	5/19/2022	Head	D2450V2 SN:706	1/13/2023	5.620	56.20	53.80	4.46%	2.600	26.00	25.00	4.00%	
E	5/23/2022	Head	D2450V2 SN:706	1/13/2023	5.520	55.20	53.80	2.60%	2.550	25.50	25.00	2.00%	
E	5/26/2022	Head	D2450V2 SN:706	1/13/2023	5.810	58.10	53.80	7.99%	2.720	27.20	25.00	8.80%	
E	5/29/2022	Head	D2450V2 SN:706	1/13/2023	5.670	56.70	53.80	5.39%	2.650	26.50	25.00	6.00%	
E	6/2/2022	Head	D2450V2 SN:706	1/13/2023	5.720	57.20	53.80	6.32%	2.690	26.90	25.00	7.60%	
E	6/5/2022	Head	D2450V2 SN:706	1/13/2023	5.840	58.40	53.80	8.55%	2.730	27.30	25.00	9.20%	10
E	6/9/2022	Head	D2450V2 SN:706	1/13/2023	5.390	53.90	53.80	0.19%	2.540	25.40	25.00	1.60%	
E	6/12/2022	Head	D2450V2 SN:706	1/13/2023	5.660	56.60	53.80	5.20%	2.640	26.40	25.00	5.60%	
E	6/16/2022	Head	D2450V2 SN:706	1/13/2023	5.460	54.60	53.80	1.49%	2.540	25.40	25.00	1.60%	
E	6/19/2022	Head	D2450V2 SN:706	1/13/2023	5.610	56.10	53.80	4.28%	2.620	26.20	25.00	4.80%	
E	6/23/2022	Head	D2450V2 SN:706	1/13/2023	5.210	52.10	53.80	-3.16%	2.440	24.40	25.00	-2.40%	
E	6/26/2022	Head	D2450V2 SN:706	1/13/2023	5.520	55.20	53.80	2.60%	2.590	25.90	25.00	3.60%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
F	5/15/2022	Head	D5GHzV2 SN:1003 (5.25 GHz)	2/23/2023	8.840	88.40	81.70	8.20%	2.530	25.30	23.30	8.58%	11
F	5/19/2022	Head	D5GHzV2 SN:1003 (5.25 GHz)	2/23/2023	8.080	80.80	81.70	-1.10%	2.300	23.00	23.30	-1.29%	
F	5/22/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	6.700	67.00	73.60	-8.97%	1.910	19.10	21.20	-9.91%	12
F	5/26/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.900	79.00	73.60	7.34%	2.270	22.70	21.20	7.08%	
F	5/29/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.190	71.90	73.60	-2.31%	2.070	20.70	21.20	-2.36%	
F	6/2/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	6.980	69.80	73.60	-5.16%	2.000	20.00	21.20	-5.66%	
F	6/5/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.790	77.90	73.60	5.84%	2.210	22.10	21.20	4.25%	
F	6/8/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.320	73.20	73.60	-0.54%	2.100	21.00	21.20	-0.94%	
F	6/12/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.360	73.60	73.60	0.00%	2.100	21.00	21.20	-0.94%	
F	6/16/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.820	78.20	73.60	6.25%	2.260	22.60	21.20	6.60%	
F	6/19/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.870	78.70	73.60	6.93%	2.300	23.00	21.20	8.49%	
F	6/23/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.600	76.00	73.60	3.26%	2.190	21.90	21.20	3.30%	
F	6/26/2022	Head	D5GHzV2 SN:1168 (5.25 GHz)	11/24/2022	7.960	79.60	73.60	8.15%	2.290	22.90	21.20	8.02%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
G	5/15/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.650	86.50	83.50	3.59%	2.470	24.70	23.60	4.66%	
G	5/17/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.370	83.70	83.50	0.24%	2.420	24.20	23.60	2.54%	
G	5/21/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.090	80.90	83.50	-3.11%	2.350	23.50	23.60	-0.42%	
G	5/25/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	7.930	79.30	83.50	-5.03%	2.250	22.50	23.60	-4.66%	
G	5/29/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.430	84.30	83.50	0.96%	2.420	24.20	23.60	2.54%	
G	6/2/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.160	81.60	83.50	-2.28%	2.350	23.50	23.60	-0.42%	
G	6/5/2022	Head	D5GHzV2 SN:1138 (5.6 GHz)	8/19/2022	8.160	81.60	82.00	-0.49%	2.300	23.00	23.20	-0.86%	13
G	6/9/2022	Head	D5GHzV2 SN:1168 (5.6 GHz)	11/24/2022	8.270	82.70	81.70	1.22%	2.380	23.80	23.30	2.15%	
G	6/12/2022	Head	D5GHzV2 SN:1168 (5.6 GHz)	11/24/2022	8.250	82.50	81.70	0.98%	2.340	23.40	23.30	0.43%	
G	6/16/2022	Head	D5GHzV2 SN:1168 (5.6 GHz)	11/24/2022	8.840	88.40	81.70	8.20%	2.550	25.50	23.30	9.44%	
G	6/19/2022	Head	D5GHzV2 SN:1168 (5.6 GHz)	11/24/2022	7.480	74.80	81.70	-8.45%	2.120	21.20	23.30	-9.01%	14
G	6/23/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.050	80.50	83.50	-3.59%	2.330	23.30	23.60	-1.27%	
G	6/26/2022	Head	D5GHzV2 SN:1003 (5.60 GHz)	2/23/2023	8.830	88.30	83.50	5.75%	2.510	25.10	23.60	6.36%	15

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
H	5/15/2022	Head	D5GHz V2 SN:1003 (5.75 GHz)	2/23/2023	7.970	79.70	79.70	0.00%	2.270	22.70	22.50	0.89%	
H	5/19/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	7.530	75.30	77.00	-2.21%	2.180	21.80	22.10	-1.36%	
H	5/22/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.280	82.80	77.00	7.53%	2.370	23.70	22.10	7.24%	
H	5/26/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.400	84.00	77.00	9.09%	2.430	24.30	22.10	9.95%	16
H	5/29/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.120	81.20	77.00	5.45%	2.340	23.40	22.10	5.88%	
H	6/2/2022	Head	D5GHz V2 SN:1003 (5.75 GHz)	2/23/2023	7.750	77.50	79.70	-2.76%	2.310	23.10	22.50	2.67%	17
H	6/3/2022	Head	D2450V2 SN:706	1/13/2023	5.590	55.90	53.80	3.90%	2.670	26.70	25.00	6.80%	
H	6/5/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.190	81.90	77.00	6.36%	2.320	23.20	22.10	4.98%	
H	6/8/2022	Head	D2450V2 SN:706	1/13/2023	5.020	50.20	53.80	-6.69%	2.340	23.40	25.00	-6.40%	18
H	6/8/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	7.130	71.30	77.00	-7.40%	2.000	20.00	22.10	-9.50%	
H	6/12/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	7.900	79.00	77.00	2.60%	2.290	22.90	22.10	3.62%	
H	6/16/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	7.720	77.20	77.00	0.26%	2.260	22.60	22.10	2.26%	
H	6/19/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.100	81.00	77.00	5.19%	2.380	23.80	22.10	7.69%	
H	6/22/2022	Head	D2450V2 SN:706	1/13/2023	5.620	56.20	53.80	4.46%	2.700	27.00	25.00	8.00%	
H	6/23/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	7.140	71.40	77.00	-7.27%	2.100	21.00	22.10	-4.98%	
H	6/26/2022	Head	D5GHz V2 SN:1168 (5.75 GHz)	11/24/2022	8.350	83.50	77.00	8.44%	2.410	24.10	22.10	9.05%	
H	6/29/2022	Head	D2300V2 SN:1058	9/29/2022	4.850	48.50	50.56	-4.07%	2.310	23.10	24.52	-5.79%	19

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
1	5/16/2022	Head	D2600V2 SN:1006	9/29/2022	5.570	55.70	54.94	1.38%	2.510	25.10	25.24	-0.55%	
1	5/19/2022	Head	D2600V2 SN:1036	4/25/2023	5.460	54.60	56.20	-2.85%	2.450	24.50	25.00	-2.00%	
1	5/22/2022	Head	D2600V2 SN:1036	4/25/2023	5.410	54.10	56.20	-3.74%	2.450	24.50	25.00	-2.00%	
1	5/26/2022	Head	D2600V2 SN:1036	4/25/2023	5.630	56.30	56.20	0.18%	2.520	25.20	25.00	0.80%	
1	5/29/2022	Head	D2600V2 SN:1036	4/25/2023	6.090	60.90	56.20	8.36%	2.730	27.30	25.00	9.20%	20
1	6/2/2022	Head	D2600V2 SN:1036	4/25/2023	5.800	58.00	56.20	3.20%	2.600	26.00	25.00	4.00%	
1	6/5/2022	Head	D2600V2 SN:1006	9/29/2022	5.830	58.30	54.94	6.12%	2.600	26.00	25.24	3.01%	
1	6/9/2022	Head	D2600V2 SN:1006	9/29/2022	5.240	52.40	54.94	-4.62%	2.370	23.70	25.24	-6.10%	
1	6/12/2022	Head	D2600V2 SN:1006	9/29/2022	5.660	56.60	54.94	3.02%	2.530	25.30	25.24	0.24%	
1	6/16/2022	Head	D2600V2 SN:1006	9/29/2022	5.720	57.20	54.94	4.11%	2.580	25.80	25.24	2.22%	
1	6/19/2022	Head	D2600V2 SN:1006	9/29/2022	5.550	55.50	54.94	1.02%	2.500	25.00	25.24	-0.95%	
1	6/23/2022	Head	D2600V2 SN:1006	9/29/2022	6.010	60.10	54.94	9.39%	2.710	27.10	25.24	7.37%	
1	6/26/2022	Head	D2600V2 SN:1006	9/29/2022	6.020	60.20	54.94	9.57%	2.710	27.10	25.24	7.37%	21

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
2	6/16/2022	Head	D2600V2 SN:1006	9/29/2022	5.510	55.10	54.94	0.29%	2.490	24.90	25.24	-1.35%	
2	6/20/2022	Head	D2600V2 SN:1006	9/29/2022	5.550	55.50	54.94	1.02%	2.500	25.00	25.24	-0.95%	
2	6/23/2022	Head	D2600V2 SN:1006	9/29/2022	5.520	55.20	54.94	0.47%	2.510	25.10	25.24	-0.55%	
2	6/27/2022	Head	D2600V2 SN:1006	9/29/2022	5.160	51.60	54.94	-6.08%	2.320	23.20	25.24	-8.08%	22

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	
3	5/18/2022	Head	D3500V2 SN:1011	4/21/2023	6.890	68.90	66.50	3.61%	2.610	26.10	24.90	4.82%	
3	5/22/2022	Head	D3500V2 SN:1011	4/21/2023	6.680	66.80	66.50	0.45%	2.570	25.70	24.90	3.21%	
3	5/26/2022	Head	D3500V2 SN:1011	4/21/2023	6.490	64.90	66.50	-2.41%	2.480	24.80	24.90	-0.40%	
3	5/26/2022	Head	D3700V2 SN:1039	5/6/2023	6.530	65.30	69.27	-5.73%	2.430	24.30	25.68	-5.37%	
3	5/28/2022	Head	D3900V2 SN:1052	9/16/2022	7.330	73.30	70.10	4.56%	2.610	26.10	24.30	7.41%	23
3	5/29/2022	Head	D3500V2 SN:1011	4/21/2023	6.910	69.10	66.50	3.91%	2.650	26.50	24.90	6.43%	
3	6/1/2022	Head	D3700V2 SN:1039	5/6/2023	6.570	65.70	69.27	-5.16%	2.440	24.40	25.68	-4.98%	
3	6/5/2022	Head	D3700V2 SN:1039	5/6/2023	7.130	71.30	69.27	2.93%	2.650	26.50	25.68	3.20%	
3	6/5/2022	Head	D3500V2 SN:1011	4/21/2023	7.040	70.40	66.50	5.86%	2.690	26.90	24.90	8.03%	24
3	6/9/2022	Head	D3500V2 SN:1060	2/25/2023	6.650	66.50	66.20	0.45%	2.560	25.60	24.70	3.64%	
3	6/9/2022	Head	D3700V2 SN:1039	5/6/2023	6.350	63.50	69.27	-8.33%	2.390	23.90	25.68	-6.92%	25
3	6/12/2022	Head	D3500V2 SN:1060	2/25/2023	6.670	66.70	66.20	0.76%	2.550	25.50	24.70	3.24%	
3	6/12/2022	Head	D3700V2 SN:1039	5/6/2023	6.560	65.60	69.27	-5.30%	2.440	24.40	25.68	-4.98%	
3	6/16/2022	Head	D3500V2 SN:1060	2/25/2023	6.900	69.00	66.20	4.23%	2.640	26.40	24.70	6.88%	26
3	6/16/2022	Head	D3700V2 SN:1039	5/6/2023	6.870	68.70	69.27	-0.82%	2.550	25.50	25.68	-0.69%	
3	6/19/2022	Head	D3500V2 SN:1060	2/25/2023	6.650	66.50	66.20	0.45%	2.550	25.50	24.70	3.24%	
3	6/19/2022	Head	D3700V2 SN:1039	5/6/2023	6.980	69.80	69.27	0.76%	2.600	26.00	25.68	1.25%	
3	6/23/2022	Head	D3500V2 SN:1060	2/25/2023	6.490	64.90	66.20	-1.96%	2.470	24.70	24.70	0.00%	
3	6/23/2022	Head	D3700V2 SN:1039	5/6/2023	6.490	64.90	69.27	-6.31%	2.390	23.90	25.68	-6.92%	
3	6/24/2022	Head	D2600V2 SN:1006	9/29/2022	5.370	53.70	54.94	-2.26%	2.410	24.10	25.24	-4.52%	27
3	6/26/2022	Head	D3500V2 SN:1060	2/25/2023	6.510	65.10	66.20	-1.66%	2.500	25.00	24.70	1.21%	
3	6/26/2022	Head	D3700V2 SN:1039	5/6/2023	6.550	65.50	69.27	-5.44%	2.440	24.40	25.68	-4.98%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10%	
4	5/16/2022	Head	D3500V2 SN:1011	4/21/2023	6.770	67.70	66.50	1.80%	2.570	25.70	24.90	3.21%	
4	5/19/2022	Head	D3500V2 SN:1011	4/21/2023	6.130	61.30	66.50	-7.82%	2.340	23.40	24.90	-6.02%	28
4	5/22/2022	Head	D3500V2 SN:1011	4/21/2023	6.180	61.80	66.50	-7.07%	2.370	23.70	24.90	-4.82%	
4	5/26/2022	Head	D3500V2 SN:1011	4/21/2023	6.510	65.10	66.50	-2.11%	2.490	24.90	24.90	0.00%	
4	5/26/2022	Head	D3700V2 SN:1039	5/6/2023	7.070	70.70	69.27	2.06%	2.630	26.30	25.68	2.42%	
4	5/29/2022	Head	D3500V2 SN:1011	4/21/2023	6.130	61.30	66.50	-7.82%	2.360	23.60	24.90	-5.22%	
4	5/29/2022	Head	D3700V2 SN:1039	5/6/2023	6.570	65.70	69.27	-5.16%	2.450	24.50	25.68	-4.59%	
4	6/1/2022	Head	D3500V2 SN:1011	4/21/2023	6.290	62.90	66.50	-5.41%	2.400	24.00	24.90	-3.61%	
4	6/3/2022	Head	D3900V2 SN:1052	9/16/2022	6.360	63.60	70.10	-9.27%	2.280	22.80	24.30	-6.17%	29
4	6/5/2022	Head	D3500V2 SN:1011	4/21/2023	6.240	62.40	66.50	-6.17%	2.370	23.70	24.90	-4.82%	
4	6/5/2022	Head	D3900V2 SN:1052	9/16/2022	7.100	71.00	70.10	1.28%	2.550	25.50	24.30	4.94%	
4	6/9/2022	Head	D3500V2 SN:1011	4/21/2023	6.380	63.80	66.50	-4.06%	2.450	24.50	24.90	-1.61%	
4	6/9/2022	Head	D3900V2 SN:1052	9/16/2022	6.630	66.30	70.10	-5.42%	2.350	23.50	24.30	-3.29%	
4	6/10/2022	Head	D3700V2 SN:1039	5/6/2023	6.960	69.60	69.27	0.47%	2.610	26.10	25.68	1.64%	
4	6/12/2022	Head	D3500V2 SN:1011	4/21/2023	6.480	64.80	66.50	-2.56%	2.490	24.90	24.90	0.00%	
4	6/12/2022	Head	D3700V2 SN:1039	5/6/2023	6.840	68.40	69.27	-1.26%	2.550	25.50	25.68	-0.69%	
4	6/13/2022	Head	D3900V2 SN:1052	9/16/2022	7.040	70.40	70.10	0.43%	2.530	25.30	24.30	4.12%	
4	6/16/2022	Head	D3500V2 SN:1011	4/21/2023	6.640	66.40	66.50	-0.15%	2.530	25.30	24.90	1.61%	
4	6/16/2022	Head	D3700V2 SN:1039	5/6/2023	6.890	68.90	69.27	-0.54%	2.580	25.80	25.68	0.48%	
4	6/16/2022	Head	D3900V2 SN:1052	9/16/2022	7.060	70.60	70.10	0.71%	2.520	25.20	24.30	3.70%	
4	6/19/2022	Head	D3500V2 SN:1011	4/21/2023	6.410	64.10	66.50	-3.61%	2.450	24.50	24.90	-1.61%	
4	6/19/2022	Head	D3700V2 SN:1039	5/6/2023	6.660	66.60	69.27	-3.86%	2.460	24.60	25.68	-4.20%	
4	6/19/2022	Head	D3900V2 SN:1052	9/16/2022	6.720	67.20	70.10	-4.14%	2.380	23.80	24.30	-2.06%	
4	6/23/2022	Head	D3500V2 SN:1060	2/25/2023	6.110	61.10	66.20	-7.70%	2.350	23.50	24.70	-4.86%	30
4	6/23/2022	Head	D3700V2 SN:1039	5/6/2023	6.410	64.10	69.27	-7.46%	2.380	23.80	25.68	-7.31%	31
4	6/23/2022	Head	D3900V2 SN:1052	9/16/2022	6.380	63.80	70.10	-8.99%	2.270	22.70	24.30	-6.58%	
4	6/24/2022	Head	D2600V2 SN:1006	9/29/2022	5.470	54.70	54.94	-0.44%	2.440	24.40	25.24	-3.33%	32
4	6/26/2022	Head	D3500V2 SN:1011	4/21/2023	6.490	64.90	66.50	-2.41%	2.480	24.80	24.90	-0.40%	
4	6/26/2022	Head	D3700V2 SN:1039	5/6/2023	6.580	65.80	69.27	-5.01%	2.430	24.30	25.68	-5.37%	
4	6/26/2022	Head	D3900V2 SN:1052	9/16/2022	6.970	69.70	70.10	-0.57%	2.500	25.00	24.30	2.88%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
6	5/18/2022	Head	D3900V2 SN:1052	9/16/2022	7.180	71.80	70.10	2.43%	2.520	25.20	24.30	3.70%	
6	5/22/2022	Head	D3900V2 SN:1052	9/16/2022	6.900	69.00	70.10	-1.57%	2.440	24.40	24.30	0.41%	
6	5/26/2022	Head	D3900V2 SN:1052	9/16/2022	7.520	75.20	70.10	7.28%	2.630	26.30	24.30	8.23%	
6	5/28/2022	Head	D3500V2 SN:1060	2/25/2023	6.950	69.50	66.20	4.98%	2.680	26.80	24.70	8.50%	
6	5/31/2022	Head	D3900V2 SN:1052	9/16/2022	7.350	73.50	70.10	4.85%	2.610	26.10	24.30	7.41%	
6	6/1/2022	Head	D3500V2 SN:1060	2/25/2023	6.620	66.20	66.20	0.00%	2.530	25.30	24.70	2.43%	
6	6/5/2022	Head	D3500V2 SN:1060	2/25/2023	6.710	67.10	66.20	1.36%	2.550	25.50	24.70	3.24%	
6	6/5/2022	Head	D3900V2 SN:1052	9/16/2022	7.560	75.60	70.10	7.85%	2.660	26.60	24.30	9.47%	33
6	6/9/2022	Head	D3500V2 SN:1060	2/25/2023	6.960	69.60	66.20	5.14%	2.710	27.10	24.70	9.72%	
6	6/9/2022	Head	D3900V2 SN:1052	9/16/2022	7.160	71.60	70.10	2.14%	2.550	25.50	24.30	4.94%	
6	6/12/2022	Head	D3500V2 SN:1060	2/25/2023	6.730	67.30	66.20	1.66%	2.560	25.60	24.70	3.64%	
6	6/12/2022	Head	D3700V2 SN:1039	5/6/2023	6.730	67.30	69.27	-2.85%	2.500	25.00	25.68	-2.64%	
6	6/12/2022	Head	D3900V2 SN:1052	9/16/2022	7.000	70.00	70.10	-0.14%	2.480	24.80	24.30	2.06%	
6	6/16/2022	Head	D3500V2 SN:1060	2/25/2023	7.080	70.80	66.20	6.95%	2.600	26.00	24.70	5.26%	
6	6/16/2022	Head	D3700V2 SN:1039	5/6/2023	7.440	74.40	69.27	7.40%	2.680	26.80	25.68	4.37%	
6	6/16/2022	Head	D3900V2 SN:1052	9/16/2022	6.960	69.60	70.10	-0.71%	2.460	24.60	24.30	1.23%	
6	6/19/2022	Head	D3500V2 SN:1060	2/25/2023	7.080	70.80	66.20	6.95%	2.700	27.00	24.70	9.31%	34
6	6/19/2022	Head	D3700V2 SN:1039	5/6/2023	7.340	73.40	69.27	5.96%	2.730	27.30	25.68	6.32%	
6	6/19/2022	Head	D3900V2 SN:1052	9/16/2022	7.510	75.10	70.10	7.13%	2.660	26.60	24.30	9.47%	
6	6/23/2022	Head	D3500V2 SN:1060	2/25/2023	7.060	70.60	66.20	6.65%	2.710	27.10	24.70	9.72%	
6	6/23/2022	Head	D3700V2 SN:1039	5/6/2023	7.540	75.40	69.27	8.85%	2.800	28.00	25.68	9.04%	35
6	6/23/2022	Head	D3900V2 SN:1052	9/16/2022	7.360	73.60	70.10	4.99%	2.640	26.40	24.30	8.64%	
6	6/24/2022	Head	D2600V2 SN:1006	9/29/2022	5.870	58.70	54.94	6.84%	2.660	26.60	25.24	5.39%	36
6	6/26/2022	Head	D3500V2 SN:1060	2/25/2023	6.780	67.80	66.20	2.42%	2.620	26.20	24.70	6.07%	
6	6/26/2022	Head	D3700V2 SN:1039	5/6/2023	7.220	72.20	69.27	4.23%	2.690	26.90	25.68	4.76%	
6	6/26/2022	Head	D3900V2 SN:1052	9/16/2022	7.280	72.80	70.10	3.85%	2.610	26.10	24.30	7.41%	
6	6/29/2022	Head	D2450V2 SN:748	2/22/2023	5.630	56.30	52.40	7.44%	2.610	26.10	24.40	6.97%	37

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
8	5/16/2022	Head	D2600V2 SN:1006	9/29/2022	5.500	55.00	54.94	0.11%	2.480	24.80	25.24	-1.74%	
8	5/19/2022	Head	D2600V2 SN:1006	9/29/2022	5.590	55.90	54.94	1.75%	2.520	25.20	25.24	-0.16%	
8	5/22/2022	Head	D2600V2 SN:1006	9/29/2022	5.630	56.30	54.94	2.48%	2.550	25.50	25.24	1.03%	
8	5/24/2022	Head	D2450V2 SN:748	2/22/2023	5.160	51.60	52.40	-1.53%	2.420	24.20	24.40	-0.82%	
8	5/26/2022	Head	D2600V2 SN:1006	9/29/2022	5.090	50.90	54.94	-7.35%	2.320	23.20	25.24	-8.08%	
8	5/29/2022	Head	D2600V2 SN:1006	9/29/2022	5.220	52.20	54.94	-4.99%	2.350	23.50	25.24	-6.89%	
8	5/31/2022	Head	D2450V2 SN:748	2/22/2023	5.030	50.30	52.40	-4.01%	2.360	23.60	24.40	-3.28%	
8	6/2/2022	Head	D2600V2 SN:1006	9/29/2022	5.900	59.00	54.94	7.39%	2.690	26.90	25.24	6.58%	
8	6/5/2022	Head	D2600V2 SN:1006	9/29/2022	6.000	60.00	54.94	9.21%	2.710	27.10	25.24	7.37%	38
8	6/7/2022	Head	D2450V2 SN:748	2/22/2023	5.440	54.40	52.40	3.82%	2.590	25.90	24.40	6.15%	
8	6/9/2022	Head	D2600V2 SN:1006	9/29/2022	5.980	59.80	54.94	8.85%	2.770	27.70	25.24	9.75%	
8	6/11/2022	Head	D2450V2 SN:748	2/22/2023	5.430	54.30	52.40	3.63%	2.610	26.10	24.40	6.97%	
8	6/12/2022	Head	D2600V2 SN:1006	9/29/2022	5.860	58.60	54.94	6.66%	2.700	27.00	25.24	6.97%	
8	6/15/2022	Head	D2450V2 SN:748	2/22/2023	5.090	50.90	52.40	-2.86%	2.420	24.20	24.40	-0.82%	
8	6/18/2022	Head	D2600V2 SN:1006	9/29/2022	5.190	51.90	54.94	-5.53%	2.430	24.30	25.24	-3.72%	
8	6/19/2022	Head	D2450V2 SN:748	2/22/2023	5.390	53.90	52.40	2.86%	2.560	25.60	24.40	4.92%	
8	6/22/2022	Head	D2600V2 SN:1006	9/29/2022	5.710	57.10	54.94	3.93%	2.650	26.50	25.24	4.99%	
8	6/23/2022	Head	D2450V2 SN:748	2/22/2023	4.900	49.00	52.40	-6.49%	2.340	23.40	24.40	-4.10%	39
8	6/27/2022	Head	D2450V2 SN:748	2/22/2023	5.010	50.10	52.40	-4.39%	2.330	23.30	24.40	-4.51%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
10	5/25/2022	Head	D750V3 SN:1019	4/26/2023	0.884	8.84	8.62	2.55%	0.593	5.93	5.67	4.59%	
10	5/29/2022	Head	D750V3 SN:1019	4/26/2023	0.884	8.84	8.62	2.55%	0.593	5.93	5.67	4.59%	
10	6/2/2022	Head	D750V3 SN:1019	4/26/2023	0.896	8.96	8.62	3.94%	0.588	5.88	5.67	3.70%	
10	6/5/2022	Head	D750V3 SN:1019	4/26/2023	0.864	8.64	8.62	0.23%	0.571	5.71	5.67	0.71%	
10	6/9/2022	Head	D750V3 SN:1019	4/26/2023	0.879	8.79	8.62	1.97%	0.580	5.80	5.67	2.29%	
10	6/12/2022	Head	D750V3 SN:1019	4/26/2023	0.851	8.51	8.62	-1.28%	0.556	5.56	5.67	-1.94%	
10	6/14/2022	Head	D1750V2 SN:1050	4/27/2023	3.910	39.10	36.40	7.42%	2.090	20.90	19.10	9.42%	40
10	6/15/2022	Head	D1950V3 SN:1136	4/28/2023	3.720	37.20	41.30	-9.93%	1.920	19.20	21.30	-9.86%	41
10	6/16/2022	Head	D750V3 SN:1019	4/26/2023	0.880	8.80	8.62	2.09%	0.583	5.83	5.67	2.82%	
10	6/19/2022	Head	D750V3 SN:1019	4/26/2023	0.849	8.49	8.62	-1.51%	0.562	5.62	5.67	-0.88%	
10	6/23/2022	Head	D750V3 SN:1019	4/26/2023	0.907	9.07	8.62	5.22%	0.590	5.90	5.67	4.06%	42
10	6/27/2022	Head	D750V3 SN:1019	4/26/2023	0.860	8.60	8.62	-0.23%	0.563	5.63	5.67	-0.71%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
11	5/26/2022	Head	D835V2 SN:4d142	8/10/2022	1.030	10.30	9.64	6.85%	0.677	6.77	6.28	7.80%	
11	5/31/2022	Head	D835V2 SN:4d142	8/10/2022	1.000	10.00	9.64	3.73%	0.659	6.59	6.28	4.94%	
11	6/2/2022	Head	D835V2 SN:4d142	8/10/2022	1.020	10.20	9.64	5.81%	0.661	6.61	6.28	5.25%	
11	6/5/2022	Head	D835V2 SN:4d142	8/10/2022	0.912	9.12	9.64	-5.39%	0.595	5.95	6.28	-5.25%	
11	6/9/2022	Head	D835V2 SN:4d142	8/10/2022	1.050	10.50	9.64	8.92%	0.686	6.86	6.28	9.24%	43
11	6/12/2022	Head	D835V2 SN:4d142	8/10/2022	1.020	10.20	9.64	5.81%	0.668	6.68	6.28	6.37%	
11	6/15/2022	Head	D835V2 SN:4d142	8/10/2022	1.040	10.40	9.64	7.88%	0.682	6.82	6.28	8.60%	
11	6/20/2022	Head	D835V2 SN:4d142	8/10/2022	1.050	10.50	9.64	8.92%	0.686	6.86	6.28	9.24%	
11	6/24/2022	Head	D835V2 SN:4d142	8/10/2022	1.040	10.40	9.64	7.88%	0.685	6.85	6.28	9.08%	
11	6/26/2022	Head	D750V3 SN:1019	4/26/2023	0.909	9.09	8.62	5.45%	0.599	5.99	5.67	5.64%	44
11	6/28/2022	Head	D835V2 SN:4d142	8/10/2022	1.040	10.40	9.64	7.88%	0.684	6.84	6.28	8.92%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
12	5/25/2022	Head	D835V2 SN:4d142	8/10/2022	1.030	10.30	9.64	6.85%	0.677	6.77	6.28	7.80%	
12	5/27/2022	Head	D750V3 SN:1071	11/24/2022	0.804	8.04	8.36	-3.83%	0.525	5.25	5.53	-5.06%	
12	5/31/2022	Head	D750V3 SN:1071	11/24/2022	0.884	8.84	8.36	5.74%	0.584	5.84	5.53	5.61%	45
12	5/31/2022	Head	D835V2 SN:4d142	8/10/2022	1.000	10.00	9.64	3.73%	0.654	6.54	6.28	4.14%	
12	6/2/2022	Head	D750V3 SN:1071	11/24/2022	0.862	8.62	8.36	3.11%	0.564	5.64	5.53	1.99%	
12	6/2/2022	Head	D835V2 SN:4d142	8/10/2022	0.892	8.92	9.64	-7.47%	0.580	5.80	6.28	-7.64%	46
12	6/5/2022	Head	D750V3 SN:1019	4/26/2023	0.851	8.51	8.62	-1.28%	0.560	5.60	5.67	-1.23%	
12	6/9/2022	Head	D750V3 SN:1019	4/26/2023	0.815	8.15	8.62	-5.45%	0.534	5.34	5.67	-5.82%	47
12	6/9/2022	Head	D1640V2 SN:324	3/8/2023	3.640	36.40	34.08	6.81%	2.010	20.10	18.67	7.66%	
12	6/12/2022	Head	D1640V2 SN:324	3/8/2023	3.730	37.30	34.08	9.45%	2.040	20.40	18.67	9.27%	48
12	6/15/2022	Head	D750V3 SN:1071	11/24/2022	0.834	8.34	8.36	-0.24%	0.540	5.40	5.53	-2.35%	
12	6/17/2022	Head	D1640V2 SN:324	3/8/2023	3.500	35.00	34.08	2.70%	1.920	19.20	18.67	2.84%	
12	6/20/2022	Head	D750V3 SN:1071	11/24/2022	0.858	8.58	8.36	2.63%	0.560	5.60	5.53	1.27%	
12	6/21/2022	Head	D1640V2 SN:324	3/8/2023	3.690	36.90	34.08	8.27%	2.030	20.30	18.67	8.73%	
12	6/24/2022	Head	D750V3 SN:1019	4/26/2023	0.857	8.57	8.62	-0.58%	0.569	5.69	5.67	0.35%	
12	6/24/2022	Head	D1640V2 SN:324	3/8/2023	3.510	35.10	34.08	2.99%	1.910	19.10	18.67	2.30%	
12	6/27/2022	Head	D750V3 SN:1019	4/26/2023	0.882	8.82	8.62	2.32%	0.571	5.71	5.67	0.71%	
12	7/14/2022	Head	D1640V2 SN:324	3/8/2023	3.180	31.80	34.08	-6.69%	1.740	17.40	18.67	-6.80%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
13	6/3/2022	Head	D835V2 SN:4d142	8/10/2022	0.967	9.67	9.64	0.31%	0.636	6.36	6.28	1.27%	
13	6/7/2022	Head	D835V2 SN:4d142	8/10/2022	0.933	9.33	9.64	-3.22%	0.611	6.11	6.28	-2.71%	49
13	6/9/2022	Head	D835V2 SN:4d142	8/10/2022	0.986	9.86	9.64	2.28%	0.643	6.43	6.28	2.39%	
13	6/12/2022	Head	D835V2 SN:4d142	8/10/2022	0.981	9.81	9.64	1.76%	0.641	6.41	6.28	2.07%	
13	6/14/2022	Head	D2600V2 SN:1006	9/29/2022	5.550	55.50	54.94	1.02%	2.530	25.30	25.24	0.24%	50
13	6/16/2022	Head	D835V2 SN:4d142	8/10/2022	0.992	9.92	9.64	2.90%	0.651	6.51	6.28	3.66%	
13	6/20/2022	Head	D835V2 SN:4d142	8/10/2022	0.987	9.87	9.64	2.39%	0.642	6.42	6.28	2.23%	
13	6/24/2022	Head	D835V2 SN:4d142	8/10/2022	0.982	9.82	9.64	1.87%	0.640	6.40	6.28	1.91%	
13	6/27/2022	Head	D835V2 SN:4d142	8/10/2022	0.956	9.56	9.64	-0.83%	0.612	6.12	6.28	-2.55%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
PHD 30A	5/26/2022	Head	D83523 SN:4d076	5/2/2023	0.924	9.24	9.69	-4.64%	0.607	6.07	6.31	-3.80%	51
PHD 30A	5/31/2022	Head	D83523 SN:4d076	5/2/2023	0.934	9.34	9.69	-3.61%	0.605	6.05	6.31	-4.12%	

SAR Lab	Date	Tissue Type	Dipole Type & Serial Number	Dipole Cal. Due Date	Measured results for 1-g SAR				Measured results for 10-g SAR				Plot No.
					Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan at 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
PHD 30B	5/26/2022	Head	D750V3 SN:1022	5/2/2023	0.816	8.16	8.48	-3.77%	0.540	5.40	5.60	-3.57%	
PHD 30B	5/31/2022	Head	D750V3 SN:1022	5/2/2023	0.775	7.75	8.48	-8.61%	0.511	5.11	5.60	-8.75%	52

9. Conducted Output Power Measurements

Power measurements were performed in accordance to the device's two power modes, Mode A and Mode B for each antenna. Mode A power is used when the device is used against the user's head or away from the body. Mode B power is used when the device is used in a Body-worn configuration by the user.

The selection between antennas in the application is based on RSSI based antenna selection. The full details of power selections are described in the operational description. Refer to Sec. 7 and Sec. 10 for details of the testing. Test reductions have applied accordingly following the SAR KDB Procedure for the supported wireless technologies of the DUT. This is noted in detail for each technology in their respective Sections.

The Tune-up limit already includes component tolerance. KDB 447498 sec.4.1.(d) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

Two different powers are being displayed in this section:

- Target Output Power: Power not including the + tolerance
- Tune-Up Limit: Power of target + tolerance.

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Output Power for GSM

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

RF Air interface	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT1		ANT2		ANT3		ANT4			ANT1		ANT2		ANT3		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+	-	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B
GSM850	Voice/GPRS (1 slot)	32.5	32.5	31.5	31.5					1.0 / -1.0	33.5	33.5	32.5	32.5				
	GPRS 2 slots	31.5	29.5	29.1	30.5					1.0 / -1.0	32.5	30.5	30.1	31.5				
	EGPRS 1 slot	27.0	27.0	26.0	26.0					1.0 / -1.0	28.0	28.0	27.0	27.0				
	EGPRS 2 slots	26.0	26.0	25.0	25.0					1.0 / -1.0	27.0	27.0	26.0	26.0				
GSM1900	Voice/GPRS (1 slot)	31.0	27.0	28.5	28.5	30.5	28.8	27.2	28.0	1.0 / -1.0	32.0	28.0	29.5	29.5	31.5	29.8	28.2	29.0
	GPRS 2 slots	30.0	24.0	26.5	26.7	29.5	25.8	24.2	25.5	1.0 / -1.0	31.0	25.0	27.5	27.7	30.5	26.8	25.2	26.5
	EGPRS 1 slot	26.0	26.0	23.5	23.5	25.5	25.5	23.0	23.0	1.0 / -1.0	27.0	27.0	24.5	24.5	26.5	26.5	24.0	24.0
	EGPRS 2 slots	25.0	24.0	22.5	22.5	24.5	24.5	22.0	22.0	1.0 / -1.0	26.0	25.0	23.5	23.5	25.5	25.5	23.0	23.0

GSM850 Measured Results (ANT1)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.4	23.4	33.5	24.5	32.5	23.5	33.5	24.5
			190	836.6	32.7	23.7			32.7	23.7		
			251	848.8	32.9	23.9			32.8	23.8		
		2	128	824.2	31.3	25.3	32.5	26.5	29.9	23.9	30.5	24.5
			190	836.6	31.4	25.4			30.2	24.2		
			251	848.8	31.2	25.2			30.1	24.1		
EDGE (8PSK)	MCS5	1	128	824.2	27.1	18.1	28.0	19.0	27.1	18.1	28.0	19.0
			190	836.6	27.3	18.3			27.3	18.3		
			251	848.8	27.4	18.4			27.4	18.4		
		2	128	824.2	26.2	20.2	27.0	21.0	26.2	20.2	27.0	21.0
			190	836.6	26.1	20.1			26.1	20.1		
			251	848.8	26.3	20.3			26.3	20.3		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

GSM850 Measured Results (ANT2)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.0	22.9	32.5	23.5	32.0	23.0	32.5	23.5
			190	836.6	32.0	23.0			32.2	23.2		
			251	848.8	31.9	22.9			32.3	23.3		
		2	128	824.2	29.0	23.0	30.1	24.1	31.0	24.9	31.5	25.5
			190	836.6	29.1	23.0			31.2	25.2		
			251	848.8	29.0	23.0			31.2	25.2		
EDGE (8PSK)	MCS5	1	128	824.2	25.7	16.6	27.0	18.0	26.6	17.5	27.0	18.0
			190	836.6	25.9	16.9			26.7	17.7		
			251	848.8	25.6	16.6			26.7	17.7		
		2	128	824.2	24.6	18.6	26.0	20.0	25.3	19.3	26.0	20.0
			190	836.6	24.2	18.2			25.7	19.7		
			251	848.8	24.1	18.1			25.7	19.7		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

GSM1900 Measured Results (ANT1)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	31.3	22.3	32.0	23.0	26.6	17.6	28.0	19.0
			661	1880.0	31.2	22.2			26.7	17.7		
			810	1909.8	31.4	22.4			26.6	17.6		
		2	512	1850.2	30.3	24.3	31.0	25.0	23.8	17.8	25.0	19.0
			661	1880.0	30.3	24.3			23.8	17.8		
			810	1909.8	30.2	24.2			23.8	17.7		
EDGE (8PSK)	MCS5	1	512	1850.2	26.5	17.5	27.0	18.0	26.5	17.5	27.0	18.0
			661	1880.0	26.3	17.3			26.3	17.3		
			810	1909.8	26.2	17.2			26.2	17.2		
		2	512	1850.2	25.5	19.5	26.0	20.0	23.6	17.6	25.0	19.0
			661	1880.0	25.2	19.2			23.7	17.7		
			810	1909.8	25.4	19.4			23.7	17.7		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

GSM1900 Measured Results (ANT2)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	29.1	20.1	29.5	20.5	29.1	20.1	29.5	20.5
			661	1880.0	29.2	20.2			29.0	19.9		
			810	1909.8	29.4	20.3			29.2	20.2		
		2	512	1850.2	27.0	21.0	27.5	21.5	26.7	20.6	27.7	21.7
			661	1880.0	27.0	21.0			26.7	20.7		
			810	1909.8	27.0	21.0			26.7	20.7		
EDGE (8PSK)	MCS5	1	512	1850.2	24.0	15.0	24.5	15.5	24.1	15.0	24.5	15.5
			661	1880.0	24.1	15.1			24.2	15.2		
			810	1909.8	24.2	15.2			24.3	15.2		
		2	512	1850.2	23.2	17.2	23.5	17.5	23.1	17.0	23.5	17.5
			661	1880.0	23.4	17.3			23.3	17.2		
			810	1909.8	23.3	17.3			23.3	17.3		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

GSM1900 Measured Results (ANT3)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	30.7	21.7	31.5	22.5	28.9	19.9	29.8	20.8
			661	1880.0	30.8	21.8			29.1	20.1		
			810	1909.8	30.9	21.9			29.2	20.2		
		2	512	1850.2	28.8	22.8	30.5	24.5	26.6	20.5	26.8	20.8
			661	1880.0	29.1	23.1			26.6	20.6		
			810	1909.8	29.0	23.0			26.6	20.5		
EDGE (8PSK)	MCS5	1	512	1850.2	25.2	16.2	26.5	17.5	25.2	16.2	26.5	17.5
			661	1880.0	25.0	16.0			25.0	16.0		
			810	1909.8	25.3	16.3			25.3	16.3		
		2	512	1850.2	23.8	17.8	25.5	19.5	23.8	17.8	25.5	19.5
			661	1880.0	23.8	17.8			23.8	17.8		
			810	1909.8	24.0	18.0			24.0	18.0		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

GSM1900 Measured Results (ANT4)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Power Mode A (dBm)				Power Mode B (dBm)			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.2	18.2	28.2	19.2	27.8	18.8	29.0	20.0
			661	1880.0	27.3	18.3			28.0	19.0		
			810	1909.8	27.3	18.3			28.0	19.0		
		2	512	1850.2	24.8	18.8	25.2	19.2	25.2	19.2	26.5	20.5
			661	1880.0	24.9	18.9			25.3	19.3		
			810	1909.8	24.7	18.7			25.3	19.3		
EDGE (8PSK)	MCS5	1	512	1850.2	23.0	13.9	24.0	15.0	23.0	13.9	24.0	15.0
			661	1880.0	22.9	13.8			22.9	13.8		
			810	1909.8	23.2	14.1			23.2	14.1		
		2	512	1850.2	21.7	15.6	23.0	17.0	21.7	15.6	23.0	17.0
			661	1880.0	21.9	15.8			21.9	15.8		
			810	1909.8	21.8	15.7			21.8	15.7		

Note(s):

Based on the Tune-up Procedure, GPRS/EDGE (GMSK) mode with 2 time slots for Mode A and Mode B have maximum frame-averaged power.

9.2. W-CDMA

Per KDB 941225 D01 3G SAR Procedures for W-CDMA:

Maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's"

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1. A summary of these settings are illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_s	β_{ss}	β_{sf} (SF)	$\beta_{ss}\beta_{sf}$	β_{res} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	8/15	15/15	64	8/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{res} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{res} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_s/\beta_{ss} = 12/15$, $\beta_{ss}/\beta_{sf} = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_s/β_{ss} ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_s = 10/15$ and $\beta_{ss} = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

DC-HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests for DC-HSDPA were completed according to Release 8 procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings are illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+ Setup Procedures used to establish the test signals

The following 1 Sub-test was completed according to Release 7 procedures in table C.11.1.4 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 \cdot \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

Output Power for W-CDMA

SAR measurement is not required for the HSDPA, HSUPA, DC-HSDPA and HSPA+. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq 1/4$ dB higher than the primary mode

RF Air interface	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT1		ANT2		ANT3		ANT4			ANT1		ANT2		ANT3		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		
W-CDMA Band 2	R99	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
	HSDPA	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
	HSUPA	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
	DC-HSDPA	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
	HSPA+	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
W-CDMA Band 4	R99	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
	HSDPA	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
	HSUPA	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
	DC-HSDPA	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
	HSPA+	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
W-CDMA Band 5	R99	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
	HSDPA	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
	HSUPA	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
	DC-HSDPA	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
	HSPA+	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				

W-CDMA Band 2 Measured Results (ANT1)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	25.4	N/A	25.7	18.6	N/A	19.0
		9400	1880.0	25.4			18.6		
		9538	1907.6	25.3			18.5		
HSDPA	Subtest 1	9262	1852.4	24.4	0	25.7	17.9	0	19.0
		9400	1880.0	24.4			17.1		
		9538	1907.6	24.3			17.2		
	Subtest 2	9262	1852.4	24.4	0	25.7	17.2	0	19.0
		9400	1880.0	24.3			17.1		
		9538	1907.6	24.3			17.3		
	Subtest 3	9262	1852.4	23.9	0.5	25.2	17.2	0.5	18.5
		9400	1880.0	23.8			17.1		
		9538	1907.6	23.8			17.3		
	Subtest 4	9262	1852.4	23.8	0.5	25.2	17.2	0.5	18.5
		9400	1880.0	23.9			17.1		
		9538	1907.6	23.8			17.3		
HSUPA	Subtest 1	9262	1852.4	24.4	0	25.7	17.8	0	19.0
		9400	1880.0	24.3			17.6		
		9538	1907.6	24.2			17.7		
	Subtest 2	9262	1852.4	22.4	2	23.7	16.1	2	17.0
		9400	1880.0	22.3			15.9		
		9538	1907.6	22.2			16.1		
	Subtest 3	9262	1852.4	23.4	1	24.7	17.3	1	18.0
		9400	1880.0	23.4			17.2		
		9538	1907.6	23.2			17.2		
	Subtest 4	9262	1852.4	22.4	2	23.7	15.8	2	17.0
		9400	1880.0	22.3			15.6		
		9538	1907.6	22.2			15.7		
	Subtest 5	9262	1852.4	23.9	0	25.7	17.8	0	19.0
		9400	1880.0	23.9			17.7		
		9538	1907.6	23.8			17.8		
DC-HSDPA	Subtest 1	9262	1852.4	24.4	0	25.7	17.6	0	19.0
		9400	1880.0	24.4			17.6		
		9538	1907.6	24.3			17.5		
	Subtest 2	9262	1852.4	24.4	0	25.7	17.5	0	19.0
		9400	1880.0	24.4			17.5		
		9538	1907.6	24.2			17.4		
	Subtest 3	9262	1852.4	23.9	0.5	25.2	17.3	0.5	18.5
		9400	1880.0	23.9			17.5		
		9538	1907.6	23.7			17.4		
	Subtest 4	9262	1852.4	23.9	0.5	25.2	17.3	0.5	18.5
		9400	1880.0	23.9			17.3		
		9538	1907.6	23.8			17.4		
HSPA+	Subtest 1	9262	1852.4	22.1	2.5	23.2	15.4	2.5	16.5
		9400	1880.0	22.1			15.4		
		9538	1907.6	22.1			15.4		

W-CDMA Band 2 Measured Results (ANT2)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	21.1	N/A	21.5	21.4	N/A	21.7
		9400	1880.0	21.2			21.4		
		9538	1907.6	21.1			21.4		
HSDPA	Subtest 1	9262	1852.4	20.1	0	21.5	20.3	0	21.7
		9400	1880.0	20.2			20.4		
		9538	1907.6	20.1			20.4		
	Subtest 2	9262	1852.4	20.1	0	21.5	20.4	0	21.7
		9400	1880.0	20.2			20.4		
		9538	1907.6	20.1			20.4		
	Subtest 3	9262	1852.4	19.6	0.5	21.0	19.9	0.5	21.2
		9400	1880.0	19.7			19.9		
		9538	1907.6	19.6			19.8		
	Subtest 4	9262	1852.4	19.6	0.5	21.0	19.9	0.5	21.2
		9400	1880.0	19.7			19.9		
		9538	1907.6	19.6			19.8		
HSUPA	Subtest 1	9262	1852.4	20.2	0	21.5	20.4	0	21.7
		9400	1880.0	20.2			20.5		
		9538	1907.6	20.2			20.4		
	Subtest 2	9262	1852.4	18.2	2	19.5	18.4	2	19.7
		9400	1880.0	18.2			18.5		
		9538	1907.6	18.2			18.4		
	Subtest 3	9262	1852.4	19.2	1	20.5	19.4	1	20.7
		9400	1880.0	19.2			19.5		
		9538	1907.6	19.1			19.3		
	Subtest 4	9262	1852.4	18.2	2	19.5	18.4	2	19.7
		9400	1880.0	18.2			18.5		
		9538	1907.6	18.1			18.3		
	Subtest 5	9262	1852.4	19.7	0	21.5	20.0	0	21.7
		9400	1880.0	19.8			20.0		
		9538	1907.6	19.7			20.0		
DC-HSDPA	Subtest 1	9262	1852.4	20.2	0	21.5	20.4	0	21.7
		9400	1880.0	20.2			20.4		
		9538	1907.6	20.2			20.4		
	Subtest 2	9262	1852.4	20.2	0	21.5	20.4	0	21.7
		9400	1880.0	20.2			20.4		
		9538	1907.6	20.2			20.4		
	Subtest 3	9262	1852.4	19.6	0.5	21.0	19.9	0.5	21.2
		9400	1880.0	19.7			19.9		
		9538	1907.6	19.7			19.9		
	Subtest 4	9262	1852.4	19.6	0.5	21.0	19.9	0.5	21.2
		9400	1880.0	19.7			19.9		
		9538	1907.6	19.7			19.9		
HSPA+	Subtest 1	9262	1852.4	18.7	2.5	19.0	18.6	2.5	19.2
		9400	1880.0	18.6			18.7		
		9538	1907.6	18.7			18.7		

W-CDMA Band 2 Measured Results (ANT3)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	24.2	N/A	24.8	20.2	N/A	20.8
		9400	1880.0	24.3			20.3		
		9538	1907.6	24.0			20.2		
HSDPA	Subtest 1	9262	1852.4	24.3	0	24.8	19.8	0	20.8
		9400	1880.0	24.1			19.7		
		9538	1907.6	24.2			19.7		
	Subtest 2	9262	1852.4	24.2	0	24.8	19.8	0	20.8
		9400	1880.0	24.1			19.6		
		9538	1907.6	24.2			19.7		
	Subtest 3	9262	1852.4	23.7	0.5	24.3	19.3	0.5	20.3
		9400	1880.0	23.6			19.1		
		9538	1907.6	23.7			19.2		
	Subtest 4	9262	1852.4	23.8	0.5	24.3	19.3	0.5	20.3
		9400	1880.0	23.6			19.2		
		9538	1907.6	23.7			19.3		
HSUPA	Subtest 1	9262	1852.4	24.3	0	24.8	19.8	0	20.8
		9400	1880.0	24.1			19.6		
		9538	1907.6	24.2			19.8		
	Subtest 2	9262	1852.4	22.3	2	22.8	17.8	2	18.8
		9400	1880.0	22.1			17.7		
		9538	1907.6	22.2			17.7		
	Subtest 3	9262	1852.4	23.2	1	23.8	18.8	1	19.8
		9400	1880.0	23.1			18.6		
		9538	1907.6	23.2			18.8		
	Subtest 4	9262	1852.4	22.3	2	22.8	17.8	2	18.8
		9400	1880.0	22.1			17.6		
		9538	1907.6	22.2			17.7		
	Subtest 5	9262	1852.4	23.8	0	24.8	19.3	0	20.8
		9400	1880.0	23.7			19.2		
		9538	1907.6	23.8			19.3		
DC-HSDPA	Subtest 1	9262	1852.4	24.3	0	24.8	19.8	0	20.8
		9400	1880.0	24.2			19.7		
		9538	1907.6	24.2			19.8		
	Subtest 2	9262	1852.4	24.3	0	24.8	19.8	0	20.8
		9400	1880.0	24.1			19.6		
		9538	1907.6	24.2			19.7		
	Subtest 3	9262	1852.4	23.8	0.5	24.3	19.3	0.5	20.3
		9400	1880.0	23.5			19.0		
		9538	1907.6	23.7			19.3		
	Subtest 4	9262	1852.4	23.8	0.5	24.3	19.3	0.5	20.3
		9400	1880.0	23.6			19.2		
		9538	1907.6	23.8			19.3		
HSPA+	Subtest 1	9262	1852.4	21.3	2.5	22.3	18.3	2.5	18.3
		9400	1880.0	21.2			18.2		
		9538	1907.6	21.2			18.2		

W-CDMA Band 2 Measured Results (ANT4)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	18.3	N/A	19.2	19.4	N/A	19.8
		9400	1880.0	18.5			19.6		
		9538	1907.6	18.5			19.5		
HSDPA	Subtest 1	9262	1852.4	18.2	0	19.2	18.9	0	19.8
		9400	1880.0	18.4			19.1		
		9538	1907.6	18.4			19.1		
	Subtest 2	9262	1852.4	18.4	0	19.2	18.5	0	19.8
		9400	1880.0	18.3			18.8		
		9538	1907.6	18.3			18.7		
	Subtest 3	9262	1852.4	17.8	0.5	18.7	18.3	0.5	19.3
		9400	1880.0	18.1			18.4		
		9538	1907.6	18.1			18.3		
	Subtest 4	9262	1852.4	18.3	0.5	18.7	18.0	0.5	19.3
		9400	1880.0	17.9			17.9		
		9538	1907.6	18.0			18.6		
HSUPA	Subtest 1	9262	1852.4	17.6	0	19.2	18.7	0	19.8
		9400	1880.0	17.9			18.9		
		9538	1907.6	18.0			19.0		
	Subtest 2	9262	1852.4	15.6	2	17.2	16.8	2	17.8
		9400	1880.0	15.9			17.1		
		9538	1907.6	16.0			17.0		
	Subtest 3	9262	1852.4	16.7	1	18.2	17.9	1	18.8
		9400	1880.0	17.0			18.1		
		9538	1907.6	17.0			18.2		
	Subtest 4	9262	1852.4	15.7	2	17.2	16.9	2	17.8
		9400	1880.0	15.9			17.1		
		9538	1907.6	16.0			17.2		
	Subtest 5	9262	1852.4	18.0	0	19.2	18.9	0	19.8
		9400	1880.0	18.0			19.2		
		9538	1907.6	18.0			19.2		
DC-HSDPA	Subtest 1	9262	1852.4	17.7	0	19.2	18.9	0	19.8
		9400	1880.0	18.0			19.2		
		9538	1907.6	18.0			19.2		
	Subtest 2	9262	1852.4	17.7	0	19.2	18.9	0	19.8
		9400	1880.0	18.0			19.2		
		9538	1907.6	18.0			19.2		
	Subtest 3	9262	1852.4	17.2	0.5	18.7	18.4	0.5	19.3
		9400	1880.0	17.4			18.7		
		9538	1907.6	17.5			18.7		
	Subtest 4	9262	1852.4	17.2	0.5	18.7	18.4	0.5	19.3
		9400	1880.0	17.5			18.6		
		9538	1907.6	17.5			18.7		
HSPA+	Subtest 1	9262	1852.4	15.2	2.5	16.7	16.4	2.5	17.3
		9400	1880.0	15.5			16.6		
		9538	1907.6	15.5			16.7		

W-CDMA Band 4 Measured Results (ANT1)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	24.3	N/A	24.8	17.6	N/A	18.1
		1413	1732.6	24.3			17.6		
		1513	1752.6	24.2			17.5		
HSDPA	Subtest 1	1312	1712.4	23.4	0	24.8	16.6	0	18.1
		1413	1732.6	23.3			16.6		
		1513	1752.6	23.2			16.5		
	Subtest 2	1312	1712.4	23.4	0	24.8	16.6	0	18.1
		1413	1732.6	23.3			16.6		
		1513	1752.6	23.2			16.5		
	Subtest 3	1312	1712.4	22.9	0.5	24.3	16.1	0.5	17.6
		1413	1732.6	22.8			16.1		
		1513	1752.6	22.7			16.0		
	Subtest 4	1312	1712.4	22.9	0.5	24.3	16.1	0.5	17.6
		1413	1732.6	22.8			16.1		
		1513	1752.6	22.8			16.0		
HSUPA	Subtest 1	1312	1712.4	23.4	0	24.8	16.6	0	18.1
		1413	1732.6	23.3			16.6		
		1513	1752.6	23.2			16.5		
	Subtest 2	1312	1712.4	21.4	2	22.8	14.6	2	16.1
		1413	1732.6	21.3			14.6		
		1513	1752.6	21.2			14.5		
	Subtest 3	1312	1712.4	22.4	1	23.8	15.6	1	17.1
		1413	1732.6	22.3			15.6		
		1513	1752.6	22.3			15.5		
	Subtest 4	1312	1712.4	21.4	2	22.8	14.7	2	16.1
		1413	1732.6	21.3			14.6		
		1513	1752.6	21.3			14.5		
	Subtest 5	1312	1712.4	22.9	0	24.8	16.2	0	18.1
		1413	1732.6	22.9			16.2		
		1513	1752.6	22.8			16.1		
DC-HSDPA	Subtest 1	1312	1712.4	23.4	0	24.8	16.6	0	18.1
		1413	1732.6	23.3			16.6		
		1513	1752.6	23.2			16.5		
	Subtest 2	1312	1712.4	23.4	0	24.8	16.7	0	18.1
		1413	1732.6	23.3			16.6		
		1513	1752.6	23.3			16.5		
	Subtest 3	1312	1712.4	22.9	0.5	24.3	16.1	0.5	17.6
		1413	1732.6	22.8			16.1		
		1513	1752.6	22.7			16.0		
	Subtest 4	1312	1712.4	22.9	0.5	24.3	16.2	0.5	17.6
		1413	1732.6	22.8			16.1		
		1513	1752.6	22.7			16.0		
HSPA+	Subtest 1	1312	1712.4	21.2	2.5	22.3	14.5	2.5	15.6
		1413	1732.6	21.2			14.5		
		1513	1752.6	21.2			14.5		

W-CDMA Band 4 Measured Results (ANT2)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	20.7	N/A	21.0	21.0	N/A	21.3
		1413	1732.6	20.7			21.1		
		1513	1752.6	20.7			21.0		
HSDPA	Subtest 1	1312	1712.4	20.1	0	21.0	20.2	0	21.3
		1413	1732.6	20.1			20.3		
		1513	1752.6	20.0			20.2		
	Subtest 2	1312	1712.4	20.1	0	21.0	20.3	0	21.3
		1413	1732.6	20.1			20.3		
		1513	1752.6	20.0			20.2		
	Subtest 3	1312	1712.4	19.5	0.5	20.5	19.7	0.5	20.8
		1413	1732.6	19.6			19.8		
		1513	1752.6	19.5			19.7		
	Subtest 4	1312	1712.4	19.5	0.5	20.5	19.8	0.5	20.8
		1413	1732.6	19.6			19.8		
		1513	1752.6	19.5			19.7		
HSUPA	Subtest 1	1312	1712.4	20.0	0	21.0	20.3	0	21.3
		1413	1732.6	20.1			20.3		
		1513	1752.6	20.0			20.2		
	Subtest 2	1312	1712.4	18.1	2	19.0	18.3	2	19.3
		1413	1732.6	18.1			18.3		
		1513	1752.6	18.0			18.2		
	Subtest 3	1312	1712.4	19.1	1	20.0	19.2	1	20.3
		1413	1732.6	19.1			19.3		
		1513	1752.6	19.0			19.2		
	Subtest 4	1312	1712.4	18.1	2	19.0	18.3	2	19.3
		1413	1732.6	18.1			18.3		
		1513	1752.6	18.0			18.2		
	Subtest 5	1312	1712.4	19.6	0	21.0	19.8	0	21.3
		1413	1732.6	19.7			19.9		
		1513	1752.6	19.6			19.8		
DC-HSDPA	Subtest 1	1312	1712.4	20.1	0	21.0	20.3	0	21.3
		1413	1732.6	20.1			20.3		
		1513	1752.6	20.0			20.2		
	Subtest 2	1312	1712.4	20.1	0	21.0	20.3	0	21.3
		1413	1732.6	20.1			20.3		
		1513	1752.6	20.0			20.2		
	Subtest 3	1312	1712.4	19.6	0.5	20.5	19.7	0.5	20.8
		1413	1732.6	19.6			19.8		
		1513	1752.6	19.5			19.7		
	Subtest 4	1312	1712.4	19.6	0.5	20.5	19.8	0.5	20.8
		1413	1732.6	19.6			19.8		
		1513	1752.6	19.5			19.7		
HSPA+	Subtest 1	1312	1712.4	18.1	2.5	18.5	18.2	2.5	18.8
		1413	1732.6	18.1			18.2		
		1513	1752.6	18.0			18.1		

W-CDMA Band 4 Measured Results (ANT3)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	25.1	N/A	25.5	20.9	N/A	21.5
		1413	1732.6	25.1			20.9		
		1513	1752.6	25.1			20.9		
HSDPA	Subtest 1	1312	1712.4	24.8	0	25.5	20.6	0	21.5
		1413	1732.6	24.8			20.6		
		1513	1752.6	25.0			20.8		
	Subtest 2	1312	1712.4	24.7	0	25.5	20.5	0	21.5
		1413	1732.6	24.7			20.6		
		1513	1752.6	25.0			20.8		
	Subtest 3	1312	1712.4	24.2	0.5	25.0	20.0	0.5	21.0
		1413	1732.6	24.3			20.1		
		1513	1752.6	24.5			20.3		
	Subtest 4	1312	1712.4	24.3	0.5	25.0	20.1	0.5	21.0
		1413	1732.6	24.3			20.1		
		1513	1752.6	24.5			20.3		
HSUPA	Subtest 1	1312	1712.4	24.7	0	25.5	20.6	0	21.5
		1413	1732.6	24.8			20.6		
		1513	1752.6	25.0			20.8		
	Subtest 2	1312	1712.4	22.7	2	23.5	18.6	2	19.5
		1413	1732.6	22.8			18.6		
		1513	1752.6	23.0			18.8		
	Subtest 3	1312	1712.4	23.7	1	24.5	19.5	1	20.5
		1413	1732.6	23.8			19.6		
		1513	1752.6	24.0			19.8		
	Subtest 4	1312	1712.4	22.8	2	23.5	18.5	2	19.5
		1413	1732.6	22.8			18.6		
		1513	1752.6	23.0			18.7		
	Subtest 5	1312	1712.4	24.3	0	25.5	20.1	0	21.5
		1413	1732.6	24.3			20.2		
		1513	1752.6	24.5			20.3		
DC-HSDPA	Subtest 1	1312	1712.4	24.8	0	25.5	20.6	0	21.5
		1413	1732.6	24.8			20.6		
		1513	1752.6	25.0			20.8		
	Subtest 2	1312	1712.4	24.7	0	25.5	20.6	0	21.5
		1413	1732.6	24.8			20.6		
		1513	1752.6	25.0			20.8		
	Subtest 3	1312	1712.4	24.3	0.5	25.0	20.1	0.5	21.0
		1413	1732.6	24.3			20.1		
		1513	1752.6	24.5			20.2		
	Subtest 4	1312	1712.4	24.3	0.5	25.0	20.1	0.5	21.0
		1413	1732.6	24.3			20.1		
		1513	1752.6	24.5			20.3		
HSPA+	Subtest 1	1312	1712.4	22.1	2.5	23.0	18.1	2.5	19.0
		1413	1732.6	22.2			18.1		
		1513	1752.6	22.1			18.0		

W-CDMA Band 4 Measured Results (ANT4)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	18.5	N/A	19.1	18.6	N/A	19.3
		1413	1732.6	18.5			18.6		
		1513	1752.6	18.5			18.6		
HSDPA	Subtest 1	1312	1712.4	17.7	0	19.1	18.1	0	19.3
		1413	1732.6	17.8			18.2		
		1513	1752.6	17.7			18.1		
	Subtest 2	1312	1712.4	17.7	0	19.1	18.0	0	19.3
		1413	1732.6	17.5			17.8		
		1513	1752.6	17.3			17.6		
	Subtest 3	1312	1712.4	17.2	0.5	18.6	17.5	0.5	18.8
		1413	1732.6	17.2			17.6		
		1513	1752.6	17.2			17.5		
	Subtest 4	1312	1712.4	16.7	0.5	18.6	17.1	0.5	18.8
		1413	1732.6	17.0			17.3		
		1513	1752.6	16.8			17.2		
HSUPA	Subtest 1	1312	1712.4	18.0	0	19.1	18.3	0	19.3
		1413	1732.6	18.1			18.4		
		1513	1752.6	18.0			18.4		
	Subtest 2	1312	1712.4	16.1	2	17.1	16.4	2	17.3
		1413	1732.6	16.1			16.5		
		1513	1752.6	16.0			16.4		
	Subtest 3	1312	1712.4	16.9	1	18.1	17.3	1	18.3
		1413	1732.6	17.1			17.5		
		1513	1752.6	16.9			17.3		
	Subtest 4	1312	1712.4	16.0	2	17.1	16.4	2	17.3
		1413	1732.6	16.1			16.4		
		1513	1752.6	16.0			16.4		
	Subtest 5	1312	1712.4	18.0	0	19.1	18.4	0	19.3
		1413	1732.6	18.1			18.5		
		1513	1752.6	18.0			18.4		
DC-HSDPA	Subtest 1	1312	1712.4	17.8	0	19.1	18.2	0	19.3
		1413	1732.6	17.9			18.2		
		1513	1752.6	17.8			18.1		
	Subtest 2	1312	1712.4	17.8	0	19.1	18.1	0	19.3
		1413	1732.6	17.9			18.3		
		1513	1752.6	17.8			18.1		
	Subtest 3	1312	1712.4	17.3	0.5	18.6	17.7	0.5	18.8
		1413	1732.6	17.4			17.7		
		1513	1752.6	17.3			17.6		
	Subtest 4	1312	1712.4	17.3	0.5	18.6	17.7	0.5	18.8
		1413	1732.6	17.4			17.7		
		1513	1752.6	17.2			17.6		
HSPA+	Subtest 1	1312	1712.4	15.5	2.5	16.6	15.8	2.5	16.8
		1413	1732.6	15.6			15.9		
		1513	1752.6	15.5			15.9		

W-CDMA Band 5 Measured Results (ANT1)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pw r	MPR	Tune-up Limit	Measured Pw r	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	25.5	N/A	25.7	23.9	N/A	24.5
		4183	836.6	25.5			23.9		
		4233	846.6	25.5			23.9		
HSDPA	Subtest 1	4132	826.4	24.5	0	25.7	23.0	0	24.5
		4183	836.6	24.5			22.9		
		4233	846.6	24.5			22.9		
	Subtest 2	4132	826.4	24.6	0	25.7	23.0	0	24.5
		4183	836.6	24.5			22.9		
		4233	846.6	24.5			22.9		
	Subtest 3	4132	826.4	24.1	0.5	25.2	22.5	0.5	24.0
		4183	836.6	24.0			22.4		
		4233	846.6	24.0			22.4		
	Subtest 4	4132	826.4	24.1	0.5	25.2	22.5	0.5	24.0
		4183	836.6	24.0			22.4		
		4233	846.6	24.0			22.4		
HSUPA	Subtest 1	4132	826.4	24.6	0	25.7	22.9	0	24.5
		4183	836.6	24.5			22.9		
		4233	846.6	24.5			22.9		
	Subtest 2	4132	826.4	22.6	2	23.7	21.0	2	22.5
		4183	836.6	22.5			20.9		
		4233	846.6	22.5			20.9		
	Subtest 3	4132	826.4	23.6	1	24.7	22.0	1	23.5
		4183	836.6	24.0			21.9		
		4233	846.6	23.5			21.9		
	Subtest 4	4132	826.4	22.6	2	23.7	21.0	2	22.5
		4183	836.6	22.5			20.9		
		4233	846.6	22.5			20.9		
	Subtest 5	4132	826.4	24.1	0	25.7	22.5	0	24.5
		4183	836.6	24.1			22.6		
		4233	846.6	24.1			22.6		
DC-HSDPA	Subtest 1	4132	826.4	24.5	0	25.7	23.0	0	24.5
		4183	836.6	24.5			22.9		
		4233	846.6	24.5			22.9		
	Subtest 2	4132	826.4	24.6	0	25.7	23.0	0	24.5
		4183	836.6	24.5			22.9		
		4233	846.6	24.5			22.9		
	Subtest 3	4132	826.4	24.1	0.5	25.2	22.5	0.5	24.0
		4183	836.6	24.0			22.4		
		4233	846.6	24.0			22.4		
	Subtest 4	4132	826.4	24.1	0.5	25.2	22.5	0.5	24.0
		4183	836.6	24.0			22.4		
		4233	846.6	24.0			22.4		
HSPA+	Subtest 1	4132	826.4	22.1	2.5	23.2	21.9	2.5	22.0
		4183	836.6	22.1			21.9		
		4233	846.6	22.1			21.9		

W-CDMA Band 5 Measured Results (ANT2)

Mode		UL Ch No.	Freq. (MHz)	Power Mode A (dBm)			Power Mode B (dBm)		
				Measured Pw r	MPR	Tune-up Limit	Measured Pw r	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.9	N/A	24.1	24.3	N/A	24.7
		4183	836.6	24.0			24.3		
		4233	846.6	23.9			24.3		
HSDPA	Subtest 1	4132	826.4	23.3	0	24.1	23.3	0	24.7
		4183	836.6	23.3			23.3		
		4233	846.6	23.3			23.3		
	Subtest 2	4132	826.4	23.3	0	24.1	23.3	0	24.7
		4183	836.6	23.3			23.1		
		4233	846.6	23.3			23.3		
	Subtest 3	4132	826.4	22.8	0.5	23.6	22.8	0.5	24.2
		4183	836.6	22.8			22.8		
		4233	846.6	22.8			22.7		
	Subtest 4	4132	826.4	22.8	0.5	23.6	22.8	0.5	24.2
		4183	836.6	22.7			22.8		
		4233	846.6	22.7			22.7		
HSUPA	Subtest 1	4132	826.4	23.3	0	24.1	23.3	0	24.7
		4183	836.6	23.2			23.2		
		4233	846.6	23.3			23.3		
	Subtest 2	4132	826.4	21.3	2	22.1	21.3	2	22.7
		4183	836.6	21.3			21.3		
		4233	846.6	21.3			21.2		
	Subtest 3	4132	826.4	21.9	1	23.1	22.3	1	23.7
		4183	836.6	21.8			22.2		
		4233	846.6	21.8			22.3		
	Subtest 4	4132	826.4	20.9	2	22.1	21.3	2	22.7
		4183	836.6	20.9			21.3		
		4233	846.6	20.9			21.3		
	Subtest 5	4132	826.4	22.5	0	24.1	22.9	0	24.7
		4183	836.6	22.4			22.8		
		4233	846.6	22.4			22.8		
DC-HSDPA	Subtest 1	4132	826.4	22.9	0	24.1	23.3	0	24.7
		4183	836.6	22.9			23.3		
		4233	846.6	22.9			23.3		
	Subtest 2	4132	826.4	22.9	0	24.1	23.3	0	24.7
		4183	836.6	22.9			23.3		
		4233	846.6	22.8			23.3		
	Subtest 3	4132	826.4	22.4	0.5	23.6	22.8	0.5	24.2
		4183	836.6	22.4			22.8		
		4233	846.6	22.4			22.8		
	Subtest 4	4132	826.4	22.3	0.5	23.6	22.8	0.5	24.2
		4183	836.6	22.4			22.8		
		4233	846.6	22.3			22.8		
HSPA+	Subtest 1	4132	826.4	20.3	2.5	21.6	21.2	2.5	22.2
		4183	836.6	20.3			21.2		
		4233	846.6	20.2			21.1		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
256 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Output Power for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

- LTE Band 2 (1850-1910 MHz) is covered by LTE Band 25 (1850-1915 MHz)
- LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
- LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

Please refer to section 6.3. for LTE detail test channels.

RF Air interface	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT1		ANT2		ANT3		ANT4			ANT1		ANT2		ANT3		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
LTE Band 2	QPSK	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
LTE Band 4	QPSK	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
LTE Band 5	QPSK	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
LTE Band 7	QPSK	25.0	19.5	17.8	18.1	22.6	16.4	18.8	19.7	0.7 / -1.0	25.7	20.2	18.5	18.8	23.3	17.1	19.5	20.4
LTE Band 12	QPSK	25.0	25.0	23.6	24.0					0.7 / -1.0	25.7	25.7	24.3	24.7				
LTE Band 13	QPSK	25.0	25.0	23.8	24.0					0.7 / -1.0	25.7	25.7	24.5	24.7				
LTE Band 14	QPSK	25.0	25.0	23.8	24.0					0.7 / -1.0	25.7	25.7	24.5	24.7				
LTE Band 17	QPSK	25.0	25.0	23.6	24.0					0.7 / -1.0	25.7	25.7	24.3	24.7				
LTE Band 25	QPSK	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
LTE Band 26	QPSK	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
LTE Band 30	QPSK	24.9	19.5	19.8	20.3	22.9	18.6	19.0	19.4	0.7 / -1.0	25.6	20.2	20.5	21.0	23.6	19.3	19.7	20.1
LTE Band 41 (PC3)	QPSK	25.0	21.7	19.6	20.1	25.0	18.4	20.3	21.8	0.7 / -1.0	25.7	22.4	20.3	20.8	25.7	19.1	21.0	22.5
LTE Band 41 (PC 2)	QPSK	28.0	N/A	N/A	N/A	25.3	N/A	N/A	N/A	0.7 / -1.0	28.7	N/A	N/A	N/A	26.0	N/A	N/A	N/A
LTE Band 53	QPSK	20.0	20.0	20.0	20.0					0.7 / -1.0	20.7	20.7	20.7	20.7				
LTE Band 66	QPSK	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
LTE Band 71	QPSK	25.0	25.0	24.0	24.0					0.7 / -1.0	25.7	25.7	24.7	24.7				
RF Air interface	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT7		ANT8		ANT9		ANT4			ANT7		ANT8		ANT9		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
LTE Band 48	QPSK	24.4	21.1	21.5	22.0	23.3	20.6	20.8	22.0	1.0 / -1.0	25.4	22.1	22.5	23.0	24.3	21.6	21.8	23.0

LTE Band 5 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20525		MPR	Tune-up Limit		20525		MPR	Tune-up Limit	
				836.5 MHz					836.5 MHz				
10 MHz	QPSK	1	0	25.3		0	25.7		24.0		0	24.5	
		1	25	25.3		0	25.7		24.0		0	24.5	
		1	49	25.3		0	25.7		24.0		0	24.5	
		25	0	24.3		1	24.7		24.0		0	24.5	
		25	12	24.4		1	24.7		24.1		0	24.5	
		25	25	24.3		1	24.7		24.1		0	24.5	
	16QAM	50	0	24.3		1	24.7		24.1		0	24.5	
		1	0	24.6		1	24.7		24.3		0	24.5	
		1	25	24.7		1	24.7		24.3		0	24.5	
		1	49	24.6		1	24.7		24.3		0	24.5	
		25	0	23.3		2	23.7		23.3		0.8	23.7	
		25	12	23.4		2	23.7		23.4		0.8	23.7	
	64QAM	25	25	23.3		2	23.7		23.3		0.8	23.7	
		50	0	23.4		2	23.7		23.3		0.8	23.7	
		1	0	23.4		2	23.7		23.5		0.8	23.7	
		1	25	23.5		2	23.7		23.5		0.8	23.7	
		1	49	23.5		2	23.7		23.5		0.8	23.7	
		25	0	22.2		3	22.7		22.3		1.8	22.7	
	256QAM	25	12	22.3		3	22.7		22.3		1.8	22.7	
		25	25	22.3		3	22.7		22.3		1.8	22.7	
		50	0	22.3		3	22.7		22.3		1.8	22.7	
		1	0	20.4		5	20.7		20.3		3.8	20.7	
		1	25	20.5		5	20.7		20.4		3.8	20.7	
		1	49	20.4		5	20.7		20.3		3.8	20.7	
		25	0	20.3		5	20.7		20.2		3.8	20.7	
		25	12	20.3		5	20.7		20.3		3.8	20.7	
		25	25	20.3		5	20.7		20.3		3.8	20.7	
		50	0	20.3		5	20.7		20.3		3.8	20.7	
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20425	20525	20625	MPR	Tune-up Limit	20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz			826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	25.2	25.3	25.2	0	25.7	24.1	24.1	24.0	0	24.5
		1	12	25.3	25.3	25.3	0	25.7	24.1	24.1	24.1	0	24.5
		1	24	25.2	25.3	25.2	0	25.7	24.0	24.1	24.0	0	24.5
		12	0	24.2	24.2	24.3	1	24.7	24.0	24.0	24.0	0	24.5
		12	7	24.3	24.3	24.3	1	24.7	24.1	24.1	24.0	0	24.5
		12	13	24.2	24.3	24.3	1	24.7	24.1	24.1	24.1	0	24.5
	16QAM	25	0	24.2	24.3	24.2	1	24.7	24.1	24.1	24.0	0	24.5
		1	0	24.6	24.6	24.7	1	24.7	24.3	24.3	24.3	0	24.5
		1	12	24.6	24.7	24.7	1	24.7	24.3	24.3	24.3	0	24.5
		1	24	24.6	24.6	24.7	1	24.7	24.3	24.3	24.3	0	24.5
		12	0	23.2	23.3	23.4	2	23.7	23.3	23.3	23.2	0.8	23.7
		12	7	23.2	23.4	23.4	2	23.7	23.4	23.4	23.2	0.8	23.7
	64QAM	12	13	23.2	23.4	23.5	2	23.7	23.3	23.4	23.3	0.8	23.7
		25	0	23.2	23.4	23.3	2	23.7	23.3	23.3	23.2	0.8	23.7
		1	0	23.5	23.5	23.4	2	23.7	23.5	23.5	23.4	0.8	23.7
		1	12	23.4	23.5	23.4	2	23.7	23.5	23.5	23.4	0.8	23.7
		1	24	23.4	23.5	23.4	2	23.7	23.4	23.5	23.4	0.8	23.7
		12	0	22.3	22.3	22.3	3	22.7	22.3	22.2	22.3	1.8	22.7
	256QAM	12	7	22.4	22.3	22.3	3	22.7	22.4	22.3	22.3	1.8	22.7
		12	13	22.3	22.3	22.3	3	22.7	22.3	22.3	22.3	1.8	22.7
		25	0	22.4	22.3	22.2	3	22.7	22.3	22.3	22.2	1.8	22.7
		1	0	20.5	20.4	20.4	5	20.7	20.3	20.3	20.5	3.8	20.7
		1	12	20.5	20.4	20.5	5	20.7	20.3	20.4	20.5	3.8	20.7
		1	24	20.5	20.4	20.4	5	20.7	20.3	20.4	20.5	3.8	20.7
		12	0	20.2	20.2	20.3	5	20.7	20.2	20.2	20.2	3.8	20.7
		12	7	20.3	20.3	20.3	5	20.7	20.3	20.3	20.3	3.8	20.7
		12	13	20.3	20.3	20.4	5	20.7	20.3	20.3	20.3	3.8	20.7
		25	0	20.3	20.3	20.3	5	20.7	20.2	20.3	20.2	3.8	20.7

LTE Band 5 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20415	20525	20635	MPR	Tune-up Limit	20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz			825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	25.2	25.2	25.2	0	25.7	23.9	24.0	24.0	0	24.5
		1	8	25.2	25.3	25.3	0	25.7	24.1	24.0	24.1	0	24.5
		1	14	25.2	25.2	25.2	0	25.7	24.0	24.0	24.0	0	24.5
		8	0	24.2	24.2	24.2	1	24.7	24.0	24.0	24.0	0	24.5
		8	4	24.3	24.3	24.3	1	24.7	24.1	24.1	24.1	0	24.5
		8	7	24.3	24.3	24.3	1	24.7	24.1	24.1	24.1	0	24.5
	16QAM	15	0	24.2	24.2	24.3	1	24.7	24.0	24.1	24.1	0	24.5
		1	0	24.5	24.6	24.6	1	24.7	24.2	24.3	24.3	0	24.5
		1	8	24.6	24.7	24.7	1	24.7	24.3	24.3	24.3	0	24.5
		1	14	24.5	24.6	24.6	1	24.7	24.2	24.3	24.3	0	24.5
		8	0	23.3	23.3	23.3	2	23.7	23.3	23.3	23.3	0.8	23.7
		8	4	23.3	23.4	23.4	2	23.7	23.3	23.4	23.4	0.8	23.7
	64QAM	8	7	23.3	23.3	23.4	2	23.7	23.3	23.4	23.4	0.8	23.7
		15	0	23.2	23.3	23.3	2	23.7	23.2	23.3	23.3	0.8	23.7
		1	0	23.5	23.3	23.4	2	23.7	23.5	23.4	23.4	0.8	23.7
		1	8	23.5	23.4	23.5	2	23.7	23.6	23.4	23.5	0.8	23.7
		1	14	23.5	23.3	23.4	2	23.7	23.5	23.4	23.5	0.8	23.7
		8	0	22.3	22.2	22.2	3	22.7	22.3	22.2	22.2	1.8	22.7
1.4 MHz	QPSK	8	4	22.4	22.3	22.4	3	22.7	22.4	22.3	22.3	1.8	22.7
		8	7	22.3	22.3	22.3	3	22.7	22.3	22.3	22.3	1.8	22.7
		15	0	22.3	22.3	22.3	3	22.7	22.3	22.3	22.3	1.8	22.7
	16QAM	1	0	20.3	20.3	20.4	5	20.7	20.2	20.3	20.3	3.8	20.7
		1	8	20.4	20.4	20.6	5	20.7	20.4	20.4	20.4	3.8	20.7
		1	14	20.3	20.4	20.5	5	20.7	20.3	20.4	20.4	3.8	20.7
	64QAM	8	0	20.3	20.2	20.3	5	20.7	20.3	20.2	20.2	3.8	20.7
		8	4	20.3	20.3	20.4	5	20.7	20.3	20.3	20.3	3.8	20.7
		8	7	20.3	20.3	20.4	5	20.7	20.3	20.3	20.3	3.8	20.7
	256QAM	15	0	20.2	20.3	20.3	5	20.7	20.2	20.3	20.3	3.8	20.7
		1	0	25.2	25.2	25.2	0	25.7	24.0	24.0	24.0	0	24.5
		1	3	25.2	25.3	25.3	0	25.7	24.0	24.1	24.1	0	24.5
		1	5	25.2	25.2	25.2	0	25.7	24.0	24.0	24.0	0	24.5
		3	0	25.3	25.2	25.2	0	25.7	24.0	24.0	24.1	0	24.5
		3	1	25.2	25.2	25.2	0	25.7	24.0	24.0	24.0	0	24.5
	16QAM	3	3	25.3	25.2	25.2	0	25.7	24.1	24.0	24.0	0	24.5
		6	0	24.2	24.2	24.2	1	24.7	24.1	24.0	24.0	0	24.5
		1	0	24.4	24.5	24.6	1	24.7	24.2	24.3	24.3	0	24.5
		1	3	24.4	24.6	24.7	1	24.7	24.3	24.3	24.3	0	24.5
		1	5	24.4	24.5	24.7	1	24.7	24.2	24.3	24.3	0	24.5
		3	0	24.4	24.4	24.5	1	24.7	24.2	24.3	24.3	0	24.5
	64QAM	3	1	24.4	24.4	24.5	1	24.7	24.2	24.3	24.3	0	24.5
		3	3	24.4	24.4	24.4	1	24.7	24.2	24.3	24.3	0	24.5
		6	0	23.3	23.2	23.3	2	23.7	23.3	23.3	23.4	0.8	23.7
		1	0	23.4	23.3	23.5	2	23.7	23.2	23.4	23.5	0.8	23.7
		1	3	23.4	23.4	23.5	2	23.7	23.3	23.5	23.5	0.8	23.7
		1	5	23.4	23.3	23.5	2	23.7	23.3	23.4	23.5	0.8	23.7
	256QAM	3	0	23.4	23.3	23.3	2	23.7	23.4	23.3	23.4	0.8	23.7
		3	1	23.4	23.3	23.3	2	23.7	23.4	23.3	23.3	0.8	23.7
		3	3	23.3	23.3	23.3	2	23.7	23.4	23.3	23.4	0.8	23.7
		6	0	22.3	22.3	22.2	3	22.7	22.3	22.2	22.3	1.8	22.7
		1	0	20.3	20.3	20.3	5	20.7	20.2	20.3	20.4	3.8	20.7
		1	3	20.4	20.4	20.4	5	20.7	20.3	20.4	20.4	3.8	20.7
	16QAM	1	5	20.3	20.4	20.3	5	20.7	20.3	20.4	20.4	3.8	20.7
		3	0	20.3	20.2	20.3	5	20.7	20.2	20.3	20.3	3.8	20.7
		3	1	20.3	20.3	20.3	5	20.7	20.3	20.3	20.3	3.8	20.7
		3	3	20.3	20.3	20.3	5	20.7	20.3	20.3	20.3	3.8	20.7
		6	0	20.3	20.2	20.2	5	20.7	20.2	20.2	20.3	3.8	20.7
		6	0	20.3	20.2	20.2	5	20.7	20.2	20.2	20.3	3.8	20.7

LTE Band 5 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20525		MPR	Tune-up Limit		20525		MPR	Tune-up Limit	
				836.5 MHz	836.5 MHz				836.5 MHz	836.5 MHz			
10 MHz	QPSK	1	0	23.9	23.9	0	24.1		24.3	24.3	0	24.7	
		1	25	23.9	23.9	0	24.1		24.4	24.4	0	24.7	
		1	49	23.9	23.9	0	24.1		24.4	24.4	0	24.7	
		25	0	23.3	23.3	0.4	23.7		23.3	23.3	1	23.7	
		25	12	23.4	23.4	0.4	23.7		23.4	23.4	1	23.7	
		25	25	23.4	23.4	0.4	23.7		23.4	23.4	1	23.7	
	16QAM	50	0	23.4	23.4	0.4	23.7		23.4	23.4	1	23.7	
		1	0	23.4	23.4	0.4	23.7		23.4	23.4	1	23.7	
		1	25	23.3	23.3	0.4	23.7		23.3	23.3	1	23.7	
		1	49	23.5	23.5	0.4	23.7		23.4	23.4	1	23.7	
		25	0	22.1	22.1	1.4	22.7		22.1	22.1	2	22.7	
		25	12	22.2	22.2	1.4	22.7		22.2	22.2	2	22.7	
	64QAM	25	25	22.1	22.1	1.4	22.7		22.2	22.2	2	22.7	
		50	0	22.2	22.2	1.4	22.7		22.2	22.2	2	22.7	
		1	0	21.7	21.7	1.4	22.7		21.8	21.8	2	22.7	
		1	25	21.7	21.7	1.4	22.7		21.8	21.8	2	22.7	
		1	49	21.7	21.7	1.4	22.7		21.8	21.8	2	22.7	
		25	0	20.6	20.6	2.4	21.7		20.5	20.5	3	21.7	
	256QAM	25	12	20.6	20.6	2.4	21.7		20.6	20.6	3	21.7	
		25	25	20.6	20.6	2.4	21.7		20.6	20.6	3	21.7	
		50	0	20.6	20.6	2.4	21.7		20.6	20.6	3	21.7	
		1	0	18.7	18.7	4.4	19.7		18.7	18.7	5	19.7	
		1	25	18.7	18.7	4.4	19.7		18.8	18.8	5	19.7	
		1	49	18.7	18.7	4.4	19.7		18.7	18.7	5	19.7	
		25	0	18.6	18.6	4.4	19.7		18.6	18.6	5	19.7	
		25	12	18.7	18.7	4.4	19.7		18.7	18.7	5	19.7	
		25	25	18.7	18.7	4.4	19.7		18.6	18.6	5	19.7	
		50	0	18.6	18.6	4.4	19.7		18.6	18.6	5	19.7	
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20425	20525	20625	MPR	Tune-up Limit	20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz			826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	23.8	23.7	23.7	0	24.1	24.2	24.2	24.1	0	24.7
		1	12	23.8	23.7	23.8	0	24.1	24.2	24.2	24.2	0	24.7
		1	24	23.8	23.7	23.7	0	24.1	24.2	24.1	24.1	0	24.7
		12	0	23.2	23.1	23.1	0.4	23.7	23.2	23.1	23.1	1	23.7
		12	7	23.2	23.1	23.2	0.4	23.7	23.2	23.1	23.2	1	23.7
		12	13	23.2	23.1	23.2	0.4	23.7	23.2	23.1	23.2	1	23.7
	16QAM	25	0	23.2	23.1	23.2	0.4	23.7	23.2	23.1	23.2	1	23.7
		1	0	23.5	23.5	23.5	0.4	23.7	23.5	23.4	23.5	1	23.7
		1	12	23.5	23.5	23.5	0.4	23.7	23.5	23.5	23.5	1	23.7
		1	24	23.5	23.4	23.5	0.4	23.7	23.5	23.4	23.5	1	23.7
		12	0	22.3	22.2	22.3	1.4	22.7	22.3	22.1	22.2	2	22.7
		12	7	22.3	22.2	22.4	1.4	22.7	22.3	22.1	22.3	2	22.7
	64QAM	12	13	22.3	22.2	22.4	1.4	22.7	22.2	22.1	22.2	2	22.7
		25	0	22.2	22.1	22.2	1.4	22.7	22.2	22.1	22.2	2	22.7
		1	0	21.9	21.8	21.8	1.4	22.7	21.9	21.8	21.8	2	22.7
		1	12	21.8	21.7	21.9	1.4	22.7	21.8	21.8	21.9	2	22.7
		1	24	21.8	21.8	21.8	1.4	22.7	21.8	21.8	21.9	2	22.7
		12	0	20.8	20.6	20.6	2.4	21.7	20.7	20.6	20.7	3	21.7
	256QAM	12	7	20.8	20.6	20.7	2.4	21.7	20.7	20.6	20.8	3	21.7
		12	13	20.7	20.6	20.7	2.4	21.7	20.7	20.6	20.8	3	21.7
		25	0	20.8	20.6	20.7	2.4	21.7	20.7	20.6	20.8	3	21.7
		1	0	18.9	18.7	18.7	4.4	19.7	18.9	18.6	18.9	5	19.7
		1	12	18.9	18.8	18.8	4.4	19.7	18.9	18.7	18.9	5	19.7
		1	24	18.9	18.8	18.8	4.4	19.7	18.9	18.7	18.9	5	19.7
		12	0	18.8	18.6	18.6	4.4	19.7	18.7	18.6	18.7	5	19.7
		12	7	18.7	18.6	18.7	4.4	19.7	18.7	18.6	18.8	5	19.7
		12	13	18.8	18.6	18.7	4.4	19.7	18.7	18.6	18.8	5	19.7
		25	0	18.8	18.6	18.7	4.4	19.7	18.7	18.6	18.8	5	19.7

LTE Band 5 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20415	20525	20635	MPR	Tune-up Limit	20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz			825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.7	23.6	23.7	0	24.1	24.1	24.0	24.1	0	24.7
		1	8	23.8	23.7	23.8	0	24.1	24.2	24.1	24.2	0	24.7
		1	14	23.7	23.6	23.7	0	24.1	24.1	24.0	24.1	0	24.7
		8	0	23.2	23.1	23.1	0.4	23.7	23.2	23.1	23.1	1	23.7
		8	4	23.2	23.1	23.1	0.4	23.7	23.2	23.1	23.1	1	23.7
		8	7	23.2	23.1	23.2	0.4	23.7	23.2	23.1	23.2	1	23.7
	16QAM	15	0	23.1	23.1	23.1	0.4	23.7	23.2	23.1	23.1	1	23.7
		1	0	23.5	23.4	23.5	0.4	23.7	23.4	23.4	23.5	1	23.7
		1	8	23.5	23.5	23.5	0.4	23.7	23.5	23.5	23.5	1	23.7
		1	14	23.4	23.4	23.5	0.4	23.7	23.4	23.4	23.5	1	23.7
		8	0	22.3	22.2	22.2	1.4	22.7	22.2	22.1	22.2	2	22.7
		8	4	22.3	22.2	22.2	1.4	22.7	22.3	22.1	22.2	2	22.7
	64QAM	8	7	22.3	22.2	22.3	1.4	22.7	22.2	22.1	22.3	2	22.7
		15	0	22.2	22.1	22.1	1.4	22.7	22.2	22.1	22.1	2	22.7
		1	0	21.9	21.7	21.8	1.4	22.7	21.8	21.6	22.0	2	22.7
		1	8	22.0	21.8	21.9	1.4	22.7	21.8	21.7	22.0	2	22.7
		1	14	21.9	21.7	21.8	1.4	22.7	21.8	21.6	22.0	2	22.7
		8	0	20.7	20.6	20.6	2.4	21.7	20.7	20.6	20.7	3	21.7
	256QAM	8	4	20.7	20.6	20.6	2.4	21.7	20.7	20.6	20.7	3	21.7
		8	7	20.8	20.6	20.7	2.4	21.7	20.7	20.6	20.8	3	21.7
		15	0	20.7	20.6	20.6	2.4	21.7	20.7	20.6	20.7	3	21.7
		1	0	18.7	18.6	18.7	4.4	19.7	18.8	18.6	18.8	5	19.7
		1	8	18.9	18.7	18.8	4.4	19.7	18.9	18.7	18.9	5	19.7
		1	14	18.8	18.7	18.8	4.4	19.7	18.8	18.7	18.8	5	19.7
1.4 MHz	QPSK	8	0	18.7	18.5	18.6	4.4	19.7	18.7	18.6	18.7	5	19.7
		8	4	18.8	18.6	18.6	4.4	19.7	18.7	18.6	18.7	5	19.7
		8	7	18.8	18.6	18.7	4.4	19.7	18.7	18.6	18.8	5	19.7
		15	0	18.7	18.5	18.6	4.4	19.7	18.7	18.6	18.7	5	19.7
	16QAM	1	0	23.7	23.7	23.8	0	24.1	24.1	24.1	24.2	0	24.7
		1	3	23.7	23.7	23.8	0	24.1	24.1	24.1	24.2	0	24.7
		1	5	23.7	23.6	23.8	0	24.1	24.1	24.0	24.1	0	24.7
		3	0	23.7	23.6	23.7	0	24.1	24.1	24.0	24.1	0	24.7
		3	1	23.7	23.6	23.7	0	24.1	24.1	24.0	24.1	0	24.7
		3	3	23.7	23.6	23.7	0	24.1	24.1	24.0	24.1	0	24.7
	64QAM	6	0	23.1	23.0	23.1	0.4	23.7	23.1	23.0	23.1	1	23.7
		1	0	23.3	23.4	23.5	0.4	23.7	23.3	23.4	23.5	1	23.7
		1	3	23.4	23.4	23.5	0.4	23.7	23.3	23.4	23.5	1	23.7
		1	5	23.3	23.4	23.5	0.4	23.7	23.3	23.4	23.5	1	23.7
		3	0	23.3	23.2	23.3	0.4	23.7	23.3	23.2	23.3	1	23.7
		3	1	23.3	23.2	23.3	0.4	23.7	23.3	23.2	23.4	1	23.7
	256QAM	3	3	23.3	23.2	23.3	0.4	23.7	23.3	23.2	23.3	1	23.7
		6	0	22.2	22.1	22.2	1.4	22.7	22.2	22.1	22.2	2	22.7
		1	0	21.7	21.6	21.9	1.4	22.7	21.8	21.8	21.7	2	22.7
		1	3	21.8	21.7	22.0	1.4	22.7	21.8	21.7	21.8	2	22.7
		1	5	21.7	21.6	21.9	1.4	22.7	21.8	21.7	21.7	2	22.7
		3	0	21.7	21.6	21.8	1.4	22.7	21.7	21.6	21.8	2	22.7
	64QAM	3	1	21.7	21.6	21.8	1.4	22.7	21.7	21.6	21.8	2	22.7
		3	3	21.8	21.6	21.8	1.4	22.7	21.7	21.6	21.8	2	22.7
		6	0	20.6	20.6	20.6	2.4	21.7	20.6	20.6	20.8	3	21.7
	256QAM	1	0	18.7	18.7	18.7	4.4	19.7	18.8	18.7	18.8	5	19.7
		1	3	18.8	18.7	18.7	4.4	19.7	18.8	18.7	18.8	5	19.7
		1	5	18.7	18.7	18.7	4.4	19.7	18.8	18.7	18.8	5	19.7
		3	0	18.7	18.6	18.7	4.4	19.7	18.7	18.6	18.7	5	19.7
		3	1	18.7	18.6	18.7	4.4	19.7	18.7	18.6	18.7	5	19.7
		3	3	18.7	18.6	18.7	4.4	19.7	18.7	18.6	18.7	5	19.7
		6	0	18.7	18.5	18.5	4.4	19.7	18.6	18.6	18.7	5	19.7

LTE Band 7 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20850	21100	21350	MPR	Tune-up Limit	20850	21100	21350	MPR	Tune-up Limit
				2510 MHz	2535 MHz	2560 MHz			2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	24.8	25.0	25.0	0	25.7	19.7	19.8	19.9	0	20.2
		1	49	24.9	25.0	25.0	0	25.7	19.9	19.9	19.9	0	20.2
		1	99	24.9	25.0	25.0	0	25.7	19.9	19.9	19.9	0	20.2
		50	0	24.0	24.1	24.2	1	24.7	19.9	19.9	20.0	0	20.2
		50	24	24.0	24.2	24.2	1	24.7	19.9	20.0	20.0	0	20.2
		50	50	24.0	24.1	24.2	1	24.7	19.9	19.9	20.0	0	20.2
	16QAM	100	0	23.9	24.2	24.2	1	24.7	19.8	20.0	20.0	0	20.2
		1	0	24.2	24.4	24.4	1	24.7	20.0	20.1	20.2	0	20.2
		1	49	24.3	24.6	24.4	1	24.7	20.0	20.1	20.1	0	20.2
		1	99	24.2	24.5	24.4	1	24.7	20.1	20.0	20.0	0	20.2
		50	0	23.0	23.1	23.2	2	23.7	19.9	20.0	20.0	0	20.2
		50	24	23.1	23.2	23.2	2	23.7	19.9	20.0	20.1	0	20.2
	64QAM	50	50	23.0	23.1	23.1	2	23.7	19.9	20.0	20.0	0	20.2
		100	0	23.0	23.1	23.2	2	23.7	19.8	20.0	20.0	0	20.2
		1	0	23.1	23.2	23.2	2	23.7	19.9	20.0	20.0	0	20.2
		1	49	23.2	23.3	23.3	2	23.7	20.0	20.1	20.2	0	20.2
		1	99	23.1	23.2	23.2	2	23.7	20.0	20.0	20.1	0	20.2
		50	0	22.0	22.1	22.2	3	22.7	19.8	19.9	20.0	0	20.2
	256QAM	50	24	22.0	22.2	22.2	3	22.7	19.9	20.0	20.1	0	20.2
		50	50	22.0	22.1	22.1	3	22.7	19.8	20.0	20.0	0	20.2
		100	0	22.0	22.2	22.2	3	22.7	19.8	20.0	20.1	0	20.2
		1	0	20.1	20.3	20.3	5	20.7	20.0	20.1	20.0	0	20.2
		1	49	20.2	20.3	20.3	5	20.7	20.0	20.1	20.0	0	20.2
		1	99	20.2	20.3	20.3	5	20.7	20.1	20.0	20.0	0	20.2
15 MHz	QPSK	50	0	20.0	20.1	20.2	5	20.7	19.8	19.9	20.0	0	20.2
		50	24	20.0	20.2	20.2	5	20.7	19.9	20.0	20.1	0	20.2
		50	50	20.0	20.1	20.2	5	20.7	19.9	20.0	20.0	0	20.2
		100	0	20.0	20.2	20.2	5	20.7	19.8	20.0	20.1	0	20.2
	16QAM	1	0	24.9	25.0	25.1	0	25.7	19.7	19.8	19.8	0	20.2
		1	37	25.0	25.1	25.1	0	25.7	19.8	19.9	19.9	0	20.2
		1	74	25.1	25.1	25.1	0	25.7	19.9	19.9	19.9	0	20.2
		36	0	24.0	24.1	24.2	1	24.7	19.8	19.9	20.0	0	20.2
		36	20	24.0	24.1	24.2	1	24.7	19.8	20.0	20.0	0	20.2
		36	39	24.0	24.1	24.1	1	24.7	19.8	19.9	19.9	0	20.2
	64QAM	75	0	24.0	24.1	24.2	1	24.7	19.8	20.0	20.0	0	20.2
		1	0	24.2	24.3	24.4	1	24.7	20.1	20.1	20.2	0	20.2
		1	37	24.3	24.4	24.5	1	24.7	20.1	20.1	20.1	0	20.2
		1	74	24.4	24.4	24.5	1	24.7	20.1	20.2	20.1	0	20.2
		36	0	23.1	23.1	23.2	2	23.7	19.9	20.0	20.0	0	20.2
		36	20	23.0	23.2	23.2	2	23.7	19.8	20.0	20.0	0	20.2
	256QAM	36	39	23.0	23.1	23.1	2	23.7	19.8	19.9	20.0	0	20.2
		75	0	23.0	23.1	23.2	2	23.7	19.8	20.0	20.0	0	20.2
		1	0	23.0	23.2	23.3	2	23.7	19.9	20.1	20.0	0	20.2
		1	37	23.1	23.3	23.3	2	23.7	20.0	20.1	20.1	0	20.2
		1	74	23.1	23.2	23.3	2	23.7	20.0	20.1	20.1	0	20.2
		36	0	22.0	22.1	22.2	3	22.7	19.9	19.9	20.0	0	20.2
15 MHz	64QAM	36	20	21.9	22.1	22.2	3	22.7	19.8	20.0	20.0	0	20.2
		36	39	21.9	22.1	22.1	3	22.7	19.8	19.9	19.9	0	20.2
		75	0	21.9	22.1	22.2	3	22.7	19.8	20.0	20.0	0	20.2
	256QAM	1	0	20.0	20.2	20.3	5	20.7	19.8	20.0	20.1	0	20.2
		1	37	20.1	20.3	20.3	5	20.7	19.9	20.0	20.2	0	20.2
		1	74	20.1	20.3	20.3	5	20.7	19.9	20.0	20.2	0	20.2
	256QAM	36	0	20.0	20.1	20.2	5	20.7	19.9	19.9	20.0	0	20.2
		36	20	19.9	20.1	20.2	5	20.7	19.8	20.0	20.1	0	20.2
		36	39	20.0	20.2	20.2	5	20.7	19.9	19.9	20.0	0	20.2
		75	0	20.0	20.2	20.3	5	20.7	19.8	20.0	20.0	0	20.2

LTE Band 7 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20800	21100	21400	MPR	Tune-up Limit	20800	21100	21400	MPR	Tune-up Limit
				2505 MHz	2535 MHz	2565 MHz			2505 MHz	2535 MHz	2565 MHz		
10 MHz	QPSK	1	0	25.1	25.2	25.3	0	25.7	19.9	20.0	20.1	0	20.2
		1	25	25.2	25.3	25.3	0	25.7	20.0	20.0	20.1	0	20.2
		1	49	25.2	25.3	25.3	0	25.7	20.0	20.1	20.2	0	20.2
		25	0	24.2	24.3	24.3	1	24.7	20.0	20.1	20.1	0	20.2
		25	12	24.1	24.3	24.4	1	24.7	19.9	20.1	20.2	0	20.2
		25	25	24.2	24.2	24.3	1	24.7	19.9	20.0	20.1	0	20.2
	16QAM	1	0	24.1	24.3	24.4	1	24.7	19.9	20.1	20.1	0	20.2
		1	25	24.4	24.6	24.6	1	24.7	20.0	20.0	20.0	0	20.2
		1	49	24.6	24.6	24.7	1	24.7	20.0	20.0	20.0	0	20.2
		25	0	23.2	23.3	23.4	2	23.7	20.0	20.1	20.2	0	20.2
		25	12	23.2	23.4	23.4	2	23.7	20.0	20.2	20.2	0	20.2
		25	25	23.2	23.3	23.4	2	23.7	19.9	20.1	20.1	0	20.2
	64QAM	1	0	23.1	23.3	23.4	2	23.7	19.9	20.1	20.2	0	20.2
		1	25	23.3	23.4	23.4	2	23.7	20.0	20.2	20.2	0	20.2
		1	49	23.3	23.5	23.5	2	23.7	20.1	20.1	20.2	0	20.2
		25	0	22.2	22.3	22.4	3	22.7	20.0	20.1	20.1	0	20.2
		25	12	22.1	22.3	22.4	3	22.7	20.0	20.1	20.1	0	20.2
		25	25	22.2	22.2	22.3	3	22.7	20.0	20.0	20.1	0	20.2
	256QAM	1	0	22.1	22.3	22.4	3	22.7	19.9	20.1	20.2	0	20.2
		1	25	20.3	20.4	20.4	5	20.7	20.0	20.1	20.0	0	20.2
		1	49	20.4	20.5	20.5	5	20.7	20.2	20.1	20.0	0	20.2
		1	25	20.3	20.4	20.4	5	20.7	20.1	20.2	20.0	0	20.2
		25	0	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
		25	12	20.2	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
5 MHz	QPSK	25	25	20.2	20.3	20.3	5	20.7	20.0	20.0	20.1	0	20.2
		1	0	20.1	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
	16QAM	1	0	20.1	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		1	25	20.4	20.5	20.5	5	20.7	20.2	20.1	20.0	0	20.2
		1	49	20.3	20.4	20.4	5	20.7	20.1	20.2	20.0	0	20.2
		25	0	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
	64QAM	25	12	20.2	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
		25	25	20.2	20.3	20.3	5	20.7	20.0	20.0	20.1	0	20.2
	256QAM	1	0	20.1	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
		1	25	20.4	20.5	20.5	5	20.7	20.2	20.1	20.0	0	20.2
		1	49	20.3	20.4	20.4	5	20.7	20.1	20.2	20.0	0	20.2
		25	0	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
		25	12	20.2	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
		25	25	20.2	20.3	20.3	5	20.7	20.0	20.0	20.1	0	20.2
5 MHz	QPSK	1	0	20.1	20.3	20.4	5	20.7	19.9	20.1	20.2	0	20.2
		1	12	20.2	20.4	20.6	5	20.7	20.1	20.2	20.0	0	20.2
		1	24	20.2	20.3	20.5	5	20.7	20.2	20.1	20.2	0	20.2
		12	0	20.1	20.3	20.3	5	20.7	19.9	20.1	20.1	0	20.2
		12	7	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		12	13	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
	16QAM	25	0	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		1	0	20.1	20.3	20.5	5	20.7	20.0	20.1	20.2	0	20.2
		1	12	20.3	20.4	20.6	5	20.7	20.1	20.2	20.0	0	20.2
		1	24	20.2	20.3	20.5	5	20.7	20.2	20.1	20.2	0	20.2
		12	0	20.1	20.3	20.3	5	20.7	19.9	20.1	20.1	0	20.2
		12	7	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
	64QAM	12	13	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
		25	0	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		1	0	20.1	20.3	20.5	5	20.7	20.0	20.1	20.2	0	20.2
		1	12	20.3	20.4	20.6	5	20.7	20.1	20.2	20.0	0	20.2
		1	24	20.2	20.3	20.5	5	20.7	20.2	20.1	20.2	0	20.2
		12	0	20.1	20.3	20.3	5	20.7	19.9	20.1	20.1	0	20.2
	256QAM	12	7	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		12	13	20.2	20.3	20.3	5	20.7	20.0	20.1	20.1	0	20.2
		25	0	20.2	20.3	20.4	5	20.7	20.0	20.1	20.2	0	20.2
		1	0	20.1	20.3	20.5	5	20.7	20.0	20.1	20.2	0	20.2
		1	12	20.3	20.4	20.6	5	20.7	20.1	20.2	20.0	0	20.2
		1	24	20.2	20.3	20.5	5	20.7	20.2	20.1	20.2	0	20.2

LTE Band 7 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20850	21100	21350	MPR	Tune-up Limit	20850	21100	21350	MPR	Tune-up Limit
				2510 MHz	2535 MHz	2560 MHz			2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	17.6	17.5	17.6	0	18.5	17.9	17.9	17.9	0	18.8
		1	49	17.6	17.7	17.7	0	18.5	17.9	18.2	18.0	0	18.8
		1	99	17.6	17.6	17.6	0	18.5	17.9	18.0	18.0	0	18.8
		50	0	17.7	17.7	17.8	0	18.5	18.0	18.0	18.0	0	18.8
		50	24	17.7	17.7	17.8	0	18.5	18.0	18.2	18.1	0	18.8
	16QAM	50	50	17.6	17.6	17.8	0	18.5	18.0	18.0	18.0	0	18.8
		100	0	17.7	17.7	17.6	0	18.5	18.0	18.1	18.0	0	18.8
		1	0	17.4	17.5	17.5	0	18.5	17.5	17.7	17.7	0	18.8
		1	49	17.4	17.5	17.5	0	18.5	17.8	17.9	17.9	0	18.8
		1	99	17.4	17.5	17.5	0	18.5	17.6	17.8	17.8	0	18.8
	64QAM	50	0	17.5	17.5	17.6	0	18.5	17.6	17.7	17.7	0	18.8
		50	24	17.5	17.5	17.6	0	18.5	17.6	17.7	17.7	0	18.8
		50	50	17.4	17.5	17.6	0	18.5	17.6	17.6	17.7	0	18.8
		100	0	17.5	17.5	17.6	0	18.5	17.6	17.7	17.7	0	18.8
		1	0	17.0	17.1	17.2	0	18.5	17.7	17.7	17.8	0	18.8
	256QAM	1	49	17.1	17.2	17.3	0	18.5	17.8	17.9	18.0	0	18.8
		1	99	17.1	17.2	17.3	0	18.5	17.7	17.8	17.9	0	18.8
		50	0	17.0	17.1	17.2	0	18.5	17.6	17.7	17.7	0	18.8
		50	24	17.1	17.1	17.2	0	18.5	17.6	17.7	17.7	0	18.8
		50	50	17.0	17.0	17.2	0	18.5	17.6	17.7	17.6	0	18.8
15 MHz	QPSK	100	0	17.1	17.1	17.2	0	18.5	17.6	17.7	17.7	0	18.8
		1	0	17.2	17.2	17.1	0	18.5	17.7	17.7	17.7	0.1	18.7
		1	49	17.2	17.2	17.2	0	18.5	17.7	17.8	17.8	0.1	18.7
		1	99	17.2	17.3	17.2	0	18.5	17.7	17.8	17.7	0.1	18.7
		50	0	17.1	17.1	17.1	0	18.5	17.5	17.6	17.6	0.1	18.7
	16QAM	50	24	17.1	17.1	17.2	0	18.5	17.6	17.7	17.7	0.1	18.7
		50	50	17.0	17.1	17.3	0	18.5	17.5	17.6	17.7	0.1	18.7
		100	0	17.1	17.1	17.2	0	18.5	17.6	17.7	17.7	0.1	18.7
	64QAM	1	0	17.4	17.4	17.4	0	18.5	17.5	17.7	17.7	0	18.8
		1	37	17.4	17.4	17.5	0	18.5	17.7	17.7	17.8	0	18.8
		1	74	17.4	17.4	17.5	0	18.5	17.7	17.7	17.8	0	18.8
		36	0	17.5	17.5	17.6	0	18.5	17.7	17.8	17.9	0	18.8
		36	20	17.5	17.5	17.6	0	18.5	17.7	17.8	17.9	0	18.8
	256QAM	36	39	17.4	17.5	17.6	0	18.5	17.7	17.8	17.9	0	18.8
		75	0	17.4	17.5	17.6	0	18.5	17.7	17.8	17.9	0	18.8
		1	0	17.4	17.4	17.4	0	18.5	17.5	17.7	17.7	0	18.8
		1	37	17.4	17.5	17.5	0	18.5	17.6	17.7	17.8	0	18.8
		1	74	17.4	17.4	17.5	0	18.5	17.6	17.7	17.8	0	18.8
	16QAM	36	0	17.5	17.5	17.6	0	18.5	17.6	17.6	17.7	0	18.8
		36	20	17.5	17.5	17.6	0	18.5	17.5	17.6	17.7	0	18.8
		36	39	17.4	17.5	17.6	0	18.5	17.5	17.6	17.7	0	18.8
		75	0	17.4	17.5	17.6	0	18.5	17.5	17.6	17.7	0	18.8
		1	0	17.1	17.1	17.2	0	18.5	17.6	17.7	17.8	0	18.8
	64QAM	1	37	17.1	17.1	17.3	0	18.5	17.7	17.8	17.8	0	18.8
		1	74	17.2	17.2	17.3	0	18.5	17.7	17.8	17.8	0	18.8
		36	0	17.1	17.1	17.1	0	18.5	17.6	17.6	17.7	0	18.8
		36	20	17.1	17.1	17.2	0	18.5	17.6	17.7	17.7	0	18.8
		36	39	17.0	17.1	17.2	0	18.5	17.6	17.7	17.7	0	18.8
	256QAM	75	0	17.0	17.1	17.2	0	18.5	17.5	17.7	17.7	0	18.8
		1	0	17.1	17.0	17.3	0	18.5	17.6	17.6	17.8	0.1	18.7
		1	37	17.2	17.1	17.2	0	18.5	17.7	17.6	17.8	0.1	18.7
		1	74	17.1	17.1	17.2	0	18.5	17.7	17.7	17.8	0.1	18.7
		36	0	17.0	17.0	17.1	0	18.5	17.6	17.6	17.7	0.1	18.7
	16QAM	36	20	17.1	17.1	17.2	0	18.5	17.5	17.6	17.7	0.1	18.7
		36	39	17.0	17.1	17.2	0	18.5	17.6	17.7	17.7	0.1	18.7
		75	0	17.0	17.1	17.2	0	18.5	17.5	17.6	17.7	0.1	18.7
		1	0	17.0	17.1	17.2	0	18.5	17.5	17.6	17.7	0.1	18.7
		1	37	17.2	17.1	17.2	0	18.5	17.7	17.6	17.8	0.1	18.7

LTE Band 7 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20800	21100	21400	MPR	Tune-up Limit	20800	21100	21400	MPR	Tune-up Limit
				2505 MHz	2535 MHz	2565 MHz			2505 MHz	2535 MHz	2565 MHz		
10 MHz	QPSK	1	0	17.5	17.5	17.7	0	18.5	17.6	17.7	17.8	0	18.8
		1	25	17.6	17.6	17.7	0	18.5	17.7	17.7	17.8	0	18.8
		1	49	17.6	17.6	17.7	0	18.5	17.7	17.8	17.8	0	18.8
		25	0	17.6	17.6	17.7	0	18.5	17.7	17.7	17.8	0	18.8
		25	12	17.6	17.7	17.8	0	18.5	17.7	17.8	17.8	0	18.8
		25	25	17.6	17.7	17.7	0	18.5	17.6	17.8	17.8	0	18.8
	16QAM	1	0	17.6	17.6	17.6	0	18.5	17.6	17.7	17.8	0	18.8
		1	25	17.6	17.6	17.6	0	18.5	17.7	17.9	17.8	0	18.8
		1	49	17.6	17.6	17.6	0	18.5	17.8	17.9	17.9	0	18.8
		25	0	17.5	17.5	17.5	0	18.5	17.7	17.8	17.8	0	18.8
		25	12	17.4	17.5	17.5	0	18.5	17.8	17.8	17.9	0	18.8
		25	25	17.4	17.5	17.6	0	18.5	17.7	17.8	17.8	0	18.8
	64QAM	1	0	17.4	17.4	17.4	0	18.5	17.6	17.7	17.8	0	18.8
		1	25	17.4	17.4	17.4	0	18.5	17.8	17.9	18.0	0	18.8
		1	49	17.5	17.4	17.4	0	18.5	17.8	18.0	17.9	0	18.8
		25	0	17.2	17.2	17.3	0	18.5	17.7	17.7	17.8	0	18.8
		25	12	17.2	17.3	17.3	0	18.5	17.7	17.8	17.8	0	18.8
		25	25	17.2	17.3	17.3	0	18.5	17.7	17.8	17.8	0	18.8
	256QAM	1	0	17.1	17.2	17.3	0	18.5	17.6	17.8	17.8	0	18.8
		1	25	17.2	17.3	17.3	0	18.5	17.8	17.8	17.8	0.1	18.7
		1	49	17.2	17.2	17.3	0	18.5	17.8	17.8	17.8	0.1	18.7
		25	0	17.2	17.2	17.2	0	18.5	17.7	17.7	17.8	0.1	18.7
		25	12	17.1	17.2	17.3	0	18.5	17.7	17.8	17.8	0.1	18.7
		25	25	17.1	17.2	17.3	0	18.5	17.7	17.8	17.8	0.1	18.7
5 MHz	QPSK	1	0	17.5	17.5	17.6	0	18.5	17.6	17.6	17.7	0	18.8
		1	12	17.6	17.7	17.7	0	18.5	17.7	17.7	17.9	0	18.8
		1	24	17.6	17.6	17.7	0	18.5	17.6	17.6	17.8	0	18.8
		12	0	17.5	17.5	17.6	0	18.5	17.6	17.7	17.8	0	18.8
		12	7	17.6	17.6	17.7	0	18.5	17.7	17.7	17.9	0	18.8
		12	13	17.6	17.6	17.8	0	18.5	17.7	17.8	17.9	0	18.8
	16QAM	25	0	17.6	17.6	17.7	0	18.5	17.6	17.7	17.8	0	18.8
		1	0	17.6	17.6	17.6	0	18.5	17.7	17.9	17.9	0	18.8
		1	12	17.6	17.6	17.6	0	18.5	17.8	17.9	17.9	0	18.8
		1	24	17.6	17.6	17.6	0	18.5	17.7	17.9	17.8	0	18.8
		12	0	17.4	17.4	17.5	0	18.5	17.6	17.7	17.8	0	18.8
		12	7	17.5	17.4	17.6	0	18.5	17.7	17.8	17.9	0	18.8
	64QAM	12	13	17.5	17.5	17.6	0	18.5	17.8	17.8	17.9	0	18.8
		25	0	17.4	17.4	17.5	0	18.5	17.7	17.7	17.8	0	18.8
		1	0	17.1	17.3	17.4	0	18.5	17.6	17.8	17.9	0	18.8
		1	12	17.2	17.4	17.4	0	18.5	17.7	17.9	17.9	0	18.8
		1	24	17.2	17.4	17.4	0	18.5	17.7	17.9	17.9	0	18.8
		12	0	17.1	17.1	17.3	0	18.5	17.6	17.7	17.8	0	18.8
	256QAM	12	7	17.2	17.2	17.4	0	18.5	17.7	17.8	17.9	0	18.8
		12	13	17.2	17.3	17.4	0	18.5	17.7	17.8	17.9	0	18.8
		25	0	17.1	17.2	17.3	0	18.5	17.7	17.7	17.8	0	18.8
		1	0	17.1	17.2	17.4	0	18.5	17.7	17.8	17.8	0.1	18.7
		1	12	17.2	17.2	17.4	0	18.5	17.8	17.9	17.9	0.1	18.7
		1	24	17.2	17.2	17.3	0	18.5	17.8	17.8	17.8	0.1	18.7

LTE Band 7 Measured Results (ANT3)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20850	21100	21350	MPR	Tune-up Limit	20850	21100	21350	MPR	Tune-up Limit
				2510 MHz	2535 MHz	2560 MHz			2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	22.4	22.7	22.6	0	23.3	16.0	16.4	16.3	0	17.1
		1	49	22.9	22.9	22.7	0	23.3	16.5	16.6	16.4	0	17.1
		1	99	22.8	22.7	22.7	0	23.3	16.5	16.2	16.3	0	17.1
		50	0	22.8	22.8	22.7	0	23.3	16.5	16.5	16.4	0	17.1
		50	24	23.0	23.0	22.8	0	23.3	16.6	16.6	16.4	0	17.1
		50	50	22.9	22.7	22.6	0	23.3	16.5	16.3	16.3	0	17.1
	16QAM	100	0	22.8	22.8	22.8	0	23.3	16.5	16.5	16.4	0	17.1
		1	0	22.0	22.5	22.4	0	23.3	16.0	16.5	16.4	0	17.1
		1	49	22.6	22.8	22.6	0	23.3	16.5	16.5	16.5	0	17.1
		1	99	22.5	22.4	22.4	0	23.3	16.5	16.4	16.4	0	17.1
		50	0	21.8	21.8	21.8	0.3	23	16.2	16.2	16.2	0	17.1
		50	24	22.0	21.8	21.8	0.3	23	16.3	16.2	16.2	0	17.1
	64QAM	50	50	21.9	21.7	21.7	0.3	23	16.3	16.1	16.1	0	17.1
		100	0	21.8	21.8	21.7	0.3	23	16.2	16.2	16.1	0	17.1
		1	0	21.5	22.0	21.9	0.3	23	15.8	16.4	16.2	0	17.1
		1	49	22.2	22.0	22.1	0.3	23	16.5	16.4	16.3	0	17.1
		1	99	22.1	21.9	21.9	0.3	23	16.4	16.2	16.2	0	17.1
		50	0	20.8	20.9	20.8	1.3	22	16.2	16.2	16.2	0	17.1
	256QAM	50	24	21.0	20.8	20.8	1.3	22	16.3	16.1	16.1	0	17.1
		100	0	20.9	20.9	20.8	1.3	22	16.2	16.2	16.2	0	17.1
		1	0	18.6	19.1	18.9	3.3	20	15.8	16.5	16.3	0	17.1
		1	49	19.1	19.0	18.9	3.3	20	16.3	16.3	16.3	0	17.1
		1	99	19.2	19.0	18.9	3.3	20	16.4	16.3	16.3	0	17.1
		50	0	18.8	18.9	18.8	3.3	20	16.1	16.2	16.2	0	17.1
15 MHz	QPSK	50	24	19.1	18.9	18.8	3.3	20	16.3	16.2	16.2	0	17.1
		50	50	19.0	18.8	18.8	3.3	20	16.3	16.1	16.1	0	17.1
		100	0	18.9	18.9	18.8	3.3	20	16.2	16.2	16.2	0	17.1
	16QAM	1	0	22.4	22.7	22.6	0	23.3	16.0	16.4	16.3	0	17.1
		1	37	22.9	22.7	22.6	0	23.3	16.5	16.3	16.3	0	17.1
		1	74	22.9	22.6	22.7	0	23.3	16.5	16.2	16.3	0	17.1
		36	0	22.7	22.8	22.7	0	23.3	16.4	16.4	16.4	0	17.1
		36	20	22.8	22.8	22.7	0	23.3	16.5	16.4	16.4	0	17.1
		36	39	22.9	22.7	22.7	0	23.3	16.5	16.3	16.4	0	17.1
	64QAM	75	0	22.8	22.8	22.7	0	23.3	16.4	16.4	16.4	0	17.1
		1	0	22.1	22.5	22.4	0	23.3	16.0	16.4	16.3	0	17.1
		1	37	22.7	22.5	22.4	0	23.3	16.5	16.4	16.4	0	17.1
		1	74	22.5	22.4	22.4	0	23.3	16.6	16.3	16.4	0	17.1
		36	0	21.7	21.8	21.7	0.3	23	16.4	16.5	16.4	0	17.1
		36	20	21.8	21.8	21.7	0.3	23	16.5	16.4	16.4	0	17.1
	256QAM	36	39	21.9	21.7	21.7	0.3	23	16.5	16.3	16.4	0	17.1
		75	0	21.8	21.8	21.8	0.3	23	16.4	16.4	16.4	0	17.1
		1	0	21.6	21.9	21.8	0.3	23	16.1	16.5	16.5	0	17.1
		1	37	22.2	22.0	21.9	0.3	23	16.7	16.5	16.6	0	17.1
		1	74	22.2	21.9	21.9	0.3	23	16.7	16.5	16.5	0	17.1
		36	0	20.7	20.9	20.8	1.3	22	16.3	16.4	16.4	0	17.1
15 MHz	64QAM	36	20	20.8	20.9	20.8	1.3	22	16.4	16.4	16.4	0	17.1
		36	39	20.9	20.8	20.8	1.3	22	16.5	16.4	16.4	0	17.1
		75	0	20.8	20.9	20.8	1.3	22	16.4	16.4	16.4	0	17.1
	256QAM	1	0	18.6	18.9	18.9	3.3	20	16.0	16.5	16.5	0	17.1
		1	37	19.1	18.9	18.9	3.3	20	16.6	16.5	16.5	0	17.1
		1	74	19.2	18.8	18.9	3.3	20	16.8	16.5	16.5	0	17.1
	256QAM	36	0	18.7	18.9	18.8	3.3	20	16.2	16.4	16.4	0	17.1
		36	20	18.9	18.9	18.8	3.3	20	16.4	16.4	16.4	0	17.1
		36	39	19.0	18.8	18.7	3.3	20	16.5	16.4	16.4	0	17.1
		75	0	18.9	18.9	18.8	3.3	20	16.4	16.4	16.4	0	17.1

LTE Band 7 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20800	21100	21400	MPR	Tune-up Limit	20800	21100	21400	MPR	Tune-up Limit
				2505 MHz	2535 MHz	2565 MHz			2505 MHz	2535 MHz	2565 MHz		
10 MHz	QPSK	1	0	22.5	22.8	22.8	0	23.3	15.9	16.2	16.3	0	17.1
		1	25	23.0	22.9	22.8	0	23.3	16.3	16.3	16.2	0	17.1
		1	49	23.1	22.8	22.9	0	23.3	16.5	16.2	16.3	0	17.1
		25	0	22.8	22.9	22.9	0	23.3	16.2	16.3	16.3	0	17.1
		25	12	22.9	22.9	22.9	0	23.3	16.3	16.3	16.3	0	17.1
		25	25	23.0	22.8	22.9	0	23.3	16.4	16.2	16.3	0	17.1
	16QAM	50	0	22.9	22.9	22.9	0	23.3	16.2	16.3	16.3	0	17.1
		1	0	22.3	22.7	22.5	0	23.3	16.2	16.6	16.5	0	17.1
		1	25	22.6	22.6	22.5	0	23.3	16.3	16.4	16.3	0	17.1
		1	49	22.8	22.7	22.6	0	23.3	16.5	16.4	16.3	0	17.1
		25	0	21.9	22.0	21.9	0.3	23	16.2	16.4	16.3	0	17.1
		25	12	22.0	22.0	21.9	0.3	23	16.3	16.4	16.3	0	17.1
	64QAM	25	25	22.1	21.9	21.9	0.3	23	16.4	16.3	16.3	0	17.1
		50	0	21.9	21.9	21.9	0.3	23	16.3	16.3	16.3	0	17.1
		1	0	21.7	22.2	21.9	0.3	23	15.9	16.5	16.4	0	17.1
		1	25	22.1	22.2	22.0	0.3	23	16.3	16.5	16.5	0	17.1
		1	49	22.4	22.2	22.0	0.3	23	16.6	16.4	16.4	0	17.1
		25	0	20.8	20.9	20.9	1.3	22	16.1	16.3	16.3	0	17.1
5 MHz	QPSK	25	12	20.9	21.0	20.9	1.3	22	16.2	16.3	16.3	0	17.1
		25	25	21.0	20.9	20.8	1.3	22	16.3	16.3	16.2	0	17.1
		50	0	20.9	21.0	20.9	1.3	22	16.2	16.3	16.3	0	17.1
	16QAM	1	0	18.6	19.1	19.0	3.3	20	15.9	16.4	16.4	0	17.1
		1	25	18.9	19.1	19.0	3.3	20	16.3	16.4	16.4	0	17.1
		1	49	19.1	19.0	18.9	3.3	20	16.6	16.3	16.3	0	17.1
	64QAM	25	0	18.8	19.0	18.9	3.3	20	16.1	16.3	16.3	0	17.1
		25	12	18.9	19.0	18.9	3.3	20	16.2	16.3	16.3	0	17.1
		25	25	19.0	18.9	18.9	3.3	20	16.3	16.3	16.3	0	17.1
	256QAM	50	0	18.9	19.0	18.9	3.3	20	16.2	16.3	16.3	0	17.1
		1	0	22.5	22.9	22.8	0	23.3	16.2	16.5	16.5	0	17.1
		1	12	22.8	23.0	22.9	0	23.3	16.4	16.6	16.6	0	17.1
		1	24	22.9	22.9	22.8	0	23.3	16.6	16.5	16.5	0	17.1
		12	0	22.6	22.9	22.8	0	23.3	16.3	16.5	16.5	0	17.1
		12	7	22.7	22.9	22.9	0	23.3	16.4	16.5	16.5	0	17.1
5 MHz	QPSK	12	13	22.8	22.8	22.9	0	23.3	16.5	16.5	16.6	0	17.1
		25	0	22.7	22.9	22.8	0	23.3	16.4	16.5	16.5	0	17.1
	16QAM	1	0	22.2	22.6	22.6	0	23.3	16.0	16.4	16.3	0	17.1
		1	12	22.6	22.7	22.7	0	23.3	16.3	16.5	16.4	0	17.1
		1	24	22.7	22.6	22.7	0	23.3	16.4	16.4	16.3	0	17.1
		12	0	21.7	22.0	21.9	0.3	23	15.8	16.0	16.1	0	17.1
	64QAM	12	7	21.8	22.0	21.9	0.3	23	15.9	16.1	16.1	0	17.1
		12	13	21.9	21.9	22.0	0.3	23	16.0	16.0	16.2	0	17.1
		25	0	21.8	21.9	21.9	0.3	23	15.9	16.0	16.0	0	17.1
	256QAM	1	0	21.6	22.0	21.9	0.3	23	15.6	16.2	16.1	0	17.1
		1	12	21.8	22.1	22.0	0.3	23	15.8	16.3	16.2	0	17.1
		1	24	22.0	22.0	21.9	0.3	23	16.0	16.2	16.1	0	17.1
		12	0	20.6	20.9	20.9	1.3	22	15.9	16.2	16.2	0	17.1
		12	7	20.7	21.0	21.0	1.3	22	16.0	16.3	16.3	0	17.1
		12	13	20.8	21.0	21.0	1.3	22	16.2	16.4	16.3	0	17.1
5 MHz	QPSK	25	0	20.7	20.9	20.9	1.3	22	16.0	16.3	16.3	0	17.1
		1	0	18.5	19.0	19.0	3.3	20	15.9	16.4	16.3	0	17.1
		1	12	18.8	19.1	19.1	3.3	20	16.2	16.5	16.5	0	17.1
		1	24	19.0	18.9	19.0	3.3	20	16.3	16.3	16.4	0	17.1
		12	0	18.5	18.9	18.9	3.3	20	15.8	16.3	16.2	0	17.1
		12	7	18.7	19.0	19.0	3.3	20	16.0	16.3	16.3	0	17.1
	16QAM	12	13	18.8	19.0	19.0	3.3	20	16.1	16.4	16.3	0	17.1
		25	0	18.7	18.9	18.9	3.3	20	16.0	16.3	16.3	0	17.1
		1	0	20.5	20.9	20.8	1.3	22	15.7	16.1	16.0	0	17.1
		1	12	20.8	21.1	21.0	1.3	22	15.9	16.3	16.2	0	17.1
		1	24	21.0	21.0	20.9	1.3	22	16.0	16.3	16.2	0	17.1
		12	0	20.4	20.8	20.7	1.3	22	15.7	16.1	16.0	0	17.1
	64QAM	12	7	20.5	20.9	20.8	1.3	22	15.8	16.2	16.1	0	17.1
		12	13	20.6	21.0	20.9	1.3	22	15.9	16.3	16.2	0	17.1
		25	0	20.4	20.8	20.7	1.3	22	15.7	16.1	16.0	0	17.1
		1	0	18.4	18.9	18.8	3.3	20	15.7	16.2	16.1	0	17.1
		1	12	18.7	19.1	19.0	3.3	20	16.0	16.4	16.3	0	17.1
		1	24	18.9	19.0	18.9	3.3	20	16.1	16.3	16.2	0	17.1
	256QAM	12	0	18.4	18.9	18.8	3.3	20	15.7	16.2	16.1	0	17.1
		12	7	18.6	19.0	18.9	3.3	20	15.9	16.3	16.2	0	17.1
		12	13	18.7	19.1	19.0	3.3	20	16.0	16.4	16.3	0	17.1
		25	0	18.6	18.9	18.8	3.3	20	15.8	16.2	16.1	0	17.1
		1	0	18.3	18.8	18.7	3.3	20	15.6	16.1	16.0	0	17.1
		1	12	18.6	19.0	18.9	3.3	20	15.9	16.3	16.2	0	17.1

LTE Band 7 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20850	21100	21350	MPR	Tune-up Limit	20850	21100	21350	MPR	Tune-up Limit
				2510 MHz	2535 MHz	2560 MHz			2510 MHz	2535 MHz	2560 MHz		
20 MHz	QPSK	1	0	18.3	18.4	18.5	0	19.5	19.4	19.5	19.5	0	20.4
		1	49	18.7	18.7	18.6	0	19.5	19.5	19.6	19.5	0	20.4
		1	99	18.6	18.5	18.5	0	19.5	19.5	19.5	19.6	0	20.4
		50	0	18.5	18.6	18.6	0	19.5	19.6	19.6	19.6	0	20.4
		50	24	18.7	18.7	18.7	0	19.5	19.5	19.6	19.7	0	20.4
		50	50	18.6	18.6	18.6	0	19.5	19.6	19.6	19.6	0	20.4
	16QAM	100	0	18.5	18.7	18.6	0	19.5	19.5	19.6	19.6	0	20.4
		1	0	18.1	18.2	18.1	0	19.5	19.7	19.8	19.8	0	20.4
		1	49	18.5	18.5	18.3	0	19.5	20.0	20.2	19.9	0	20.4
		1	99	18.3	18.2	18.3	0	19.5	20.0	20.0	19.9	0	20.4
		50	0	18.3	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		50	24	18.3	18.5	18.4	0	19.5	19.6	19.7	19.6	0	20.4
	64QAM	50	50	18.3	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		100	0	18.3	18.4	18.5	0	19.5	19.6	19.7	19.6	0	20.4
		1	0	18.2	18.2	18.4	0	19.5	19.4	19.3	19.6	0	20.4
		1	49	18.2	18.2	18.4	0	19.5	19.4	19.4	19.5	0	20.4
		1	99	18.2	18.2	18.4	0	19.5	19.4	19.3	19.6	0	20.4
		50	0	18.2	18.2	18.4	0	19.5	19.4	19.3	19.6	0.2	20.2
	256QAM	50	24	18.2	18.2	18.4	0	19.5	19.4	19.4	19.5	0.2	20.2
		50	50	18.2	18.2	18.3	0	19.5	19.4	19.4	19.6	0.2	20.2
		100	0	18.3	18.2	18.4	0	19.5	19.4	19.4	19.6	0.2	20.2
		1	0	17.2	17.2	17.4	1.3	18.2	17.9	17.8	18.1	2.2	18.2
		1	49	17.2	17.1	17.4	1.3	18.2	17.9	17.8	18.0	2.2	18.2
		1	99	17.3	17.2	17.4	1.3	18.2	17.9	17.8	18.1	2.2	18.2
15 MHz	QPSK	50	0	17.2	17.2	17.4	1.3	18.2	17.9	17.8	18.0	2.2	18.2
		50	24	17.2	17.2	17.4	1.3	18.2	17.9	17.8	18.0	2.2	18.2
		50	50	17.2	17.2	17.4	1.3	18.2	17.9	17.8	18.1	2.2	18.2
		100	0	17.2	17.2	17.4	1.3	18.2	17.9	17.8	18.1	2.2	18.2
	16QAM	1	0	18.2	18.2	18.3	0	19.5	19.4	19.5	19.5	0	20.4
		1	37	18.3	18.3	18.3	0	19.5	19.5	19.5	19.6	0	20.4
		1	74	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0	20.4
		36	0	18.4	18.4	18.4	0	19.5	19.5	19.6	19.6	0	20.4
		36	20	18.4	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		36	39	18.4	18.4	18.4	0	19.5	19.5	19.6	19.5	0	20.4
	64QAM	75	0	18.4	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		1	0	18.2	18.3	18.4	0	19.5	19.6	19.9	19.8	0	20.4
		1	37	18.4	18.6	18.5	0	19.5	19.8	20.0	19.8	0	20.4
		1	74	18.4	18.4	18.5	0	19.5	19.8	19.9	20.0	0	20.4
		36	0	18.3	18.4	18.4	0	19.5	19.6	19.7	19.6	0	20.4
		36	20	18.4	18.4	18.4	0	19.5	19.6	19.7	19.7	0	20.4
	256QAM	36	39	18.4	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		75	0	18.4	18.4	18.4	0	19.5	19.6	19.6	19.6	0	20.4
		1	0	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0	20.4
		1	37	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0	20.4
		1	74	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0	20.4
		36	0	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0.2	20.2
15 MHz	64QAM	36	20	18.3	18.3	18.3	0	19.5	19.5	19.5	19.5	0.2	20.2
		36	39	18.3	18.3	18.3	0	19.5	19.6	19.5	19.5	0.2	20.2
		75	0	18.3	18.3	18.3	0	19.5	19.6	19.5	19.5	0.2	20.2
	256QAM	1	0	17.3	17.3	17.3	1.3	18.2	18.1	18.0	18.0	2.2	18.2
		1	37	17.3	17.3	17.3	1.3	18.2	18.0	18.0	18.0	2.2	18.2
		1	74	17.3	17.3	17.3	1.3	18.2	18.0	18.0	18.0	2.2	18.2
		36	0	17.3	17.3	17.3	1.3	18.2	18.0	18.0	18.0	2.2	18.2
		36	20	17.3	17.3	17.3	1.3	18.2	18.0	18.0	18.0	2.2	18.2
		36	39	17.3	17.3	17.3	1.3	18.2	18.1	18.0	18.0	2.2	18.2
	256QAM	75	0	17.3	17.3	17.3	1.3	18.2	18.0	18.0	18.0	2.2	18.2

LTE Band 7 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				20800	21100	21400	MPR	Tune-up Limit	20800	21100	21400	MPR	Tune-up Limit
				2505 MHz	2535 MHz	2565 MHz			2505 MHz	2535 MHz	2565 MHz		
10 MHz	QPSK	1	0	18.2	18.3	18.2	0	19.5	19.6	19.7	19.6	0	20.4
		1	25	18.3	18.4	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		1	49	18.4	18.3	18.3	0	19.5	19.8	19.7	19.6	0	20.4
		25	0	18.3	18.4	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		25	12	18.2	18.4	18.4	0	19.5	19.7	19.8	19.8	0	20.4
		25	25	18.3	18.4	18.3	0	19.5	19.7	19.8	19.7	0	20.4
	16QAM	1	0	18.2	18.4	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		1	25	18.3	18.4	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		1	49	18.4	18.3	18.3	0	19.5	19.8	19.7	19.6	0	20.4
		25	0	18.3	18.4	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		25	12	18.2	18.4	18.4	0	19.5	19.7	19.8	19.8	0	20.4
		25	25	18.3	18.4	18.3	0	19.5	19.7	19.8	19.7	0	20.4
	64QAM	1	0	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0	20.4
		1	25	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0	20.4
		1	49	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0	20.4
		25	0	18.1	18.2	18.2	0	19.5	19.5	19.7	19.6	0.2	20.2
		25	12	18.1	18.3	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
		25	25	18.1	18.3	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
	256QAM	1	0	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
		1	0	17.3	17.5	17.5	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		1	25	17.3	17.5	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		1	49	17.3	17.4	17.5	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		25	0	17.3	17.4	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		25	12	17.3	17.4	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2
5 MHz	QPSK	1	0	18.1	18.3	18.3	0	19.5	19.6	19.6	19.6	0	20.4
		1	12	18.3	18.4	18.4	0	19.5	19.7	19.8	19.8	0	20.4
		1	24	18.3	18.3	18.3	0	19.5	19.7	19.6	19.8	0	20.4
		12	0	18.2	18.3	18.3	0	19.5	19.6	19.7	19.7	0	20.4
		12	7	18.3	18.4	18.4	0	19.5	19.7	19.8	19.8	0	20.4
		12	13	18.3	18.4	18.4	0	19.5	19.7	19.8	19.8	0	20.4
	16QAM	25	0	18.2	18.3	18.3	0	19.5	19.7	19.7	19.7	0	20.4
		1	0	18.3	18.5	18.4	0	19.5	19.8	20.1	20.0	0	20.4
		1	12	18.6	18.6	18.6	0	19.5	20.0	20.2	20.1	0	20.4
		1	24	18.5	18.5	18.4	0	19.5	20.1	20.1	20.1	0	20.4
		12	0	18.0	18.1	18.1	0	19.5	19.5	19.7	19.7	0	20.4
		12	7	18.1	18.2	18.1	0	19.5	19.6	19.7	19.8	0	20.4
	64QAM	12	13	18.1	18.2	18.1	0	19.5	19.6	19.7	19.8	0	20.4
		25	0	18.1	18.1	18.1	0	19.5	19.7	19.8	19.8	0	20.4
		1	0	18.1	18.2	18.2	0	19.5	19.4	19.6	19.6	0	20.4
		1	12	18.1	18.3	18.2	0	19.5	19.5	19.6	19.6	0	20.4
		1	24	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0	20.4
		12	0	18.1	18.3	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
	256QAM	12	7	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
		12	13	18.1	18.2	18.2	0	19.5	19.5	19.6	19.6	0.2	20.2
		25	0	18.1	18.2	18.2	0	19.5	19.6	19.6	19.6	0.2	20.2
		1	0	17.4	17.4	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		1	12	17.4	17.4	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2
		1	24	17.3	17.4	17.4	1.3	18.2	18.0	18.1	18.1	2.2	18.2

LTE Band 12 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A(dBm)					Power Mode B (dBm)				
					23095		MPR	Tune-up Limit		23095		MPR	Tune-up Limit
					707.5 MHz					707.5 MHz			
10 MHz	QPSK	1	0		25.1		0	25.7		25.1		0	25.7
		1	25		25.2		0	25.7		25.2		0	25.7
		1	49		25.1		0	25.7		25.1		0	25.7
		25	0		24.1		1	24.7		24.1		1	24.7
		25	12		24.2		1	24.7		24.2		1	24.7
		25	25		24.1		1	24.7		24.1		1	24.7
	16QAM	50	0		24.2		1	24.7		24.2		1	24.7
		1	0		24.6		1	24.7		24.6		1	24.7
		1	25		24.5		1	24.7		24.5		1	24.7
		1	49		24.6		1	24.7		24.6		1	24.7
		25	0		23.1		2	23.7		23.1		2	23.7
		25	12		23.2		2	23.7		23.2		2	23.7
	64QAM	25	25		23.2		2	23.7		23.2		2	23.7
		50	0		23.2		2	23.7		23.2		2	23.7
		1	0		23.7		2	23.7		23.7		2	23.7
		1	25		23.7		2	23.7		23.7		2	23.7
		1	49		23.6		2	23.7		23.6		2	23.7
		25	0		22.4		3	22.7		22.4		3	22.7
	256QAM	25	12		22.4		3	22.7		22.4		3	22.7
		25	25		22.4		3	22.7		22.4		3	22.7
		50	0		22.4		3	22.7		22.4		3	22.7
		1	0		20.4		5	20.7		20.4		5	20.7
		1	25		20.5		5	20.7		20.5		5	20.7
		1	49		20.5		5	20.7		20.5		5	20.7
5 MHz	QPSK	25	0		20.4		5	20.7		20.4		5	20.7
		1	0		25.1		0	25.7		25.1		0	25.7
		1	12		25.2		0	25.7		25.2		0	25.7
		1	24		25.1		0	25.7		25.1		0	25.7
		12	0		24.1		1	24.7		24.1		1	24.7
		12	7		24.2		1	24.7		24.2		1	24.7
	16QAM	12	13		24.1		1	24.7		24.1		1	24.7
		25	0		24.2		1	24.7		24.2		1	24.7
		1	0		24.5		1	24.7		24.5		1	24.7
		1	12		24.6		1	24.7		24.6		1	24.7
		1	24		24.5		1	24.7		24.5		1	24.7
		12	0		23.1		2	23.7		23.1		2	23.7
	64QAM	12	7		23.2		2	23.7		23.2		2	23.7
		12	13		23.2		2	23.7		23.2		2	23.7
		25	0		23.2		2	23.7		23.2		2	23.7
		1	0		23.5		2	23.7		23.5		2	23.7
		1	12		23.5		2	23.7		23.5		2	23.7
		1	24		23.4		2	23.7		23.4		2	23.7
	256QAM	12	0		22.4		3	22.7		22.4		3	22.7
		12	7		22.5		3	22.7		22.5		3	22.7
		12	13		22.4		3	22.7		22.4		3	22.7
		25	0		22.4		3	22.7		22.4		3	22.7
		1	0		20.4		5	20.7		20.4		5	20.7
		1	12		20.5		5	20.7		20.5		5	20.7

LTE Band 12 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				23025	23095	23165	MPR	Tune-up Limit	23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz			700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	25.1	25.0	25.1	0	25.7	25.1	25.0	25.1	0	25.7
		1	8	25.2	25.1	25.2	0	25.7	25.2	25.1	25.2	0	25.7
		1	14	25.0	25.0	25.1	0	25.7	25.0	25.0	25.1	0	25.7
		8	0	24.1	24.1	24.1	1	24.7	24.1	24.1	24.1	1	24.7
		8	4	24.2	24.1	24.2	1	24.7	24.2	24.1	24.2	1	24.7
		8	7	24.2	24.1	24.2	1	24.7	24.2	24.1	24.2	1	24.7
	16QAM	15	0	24.1	24.1	24.1	1	24.7	24.1	24.1	24.1	1	24.7
		1	0	24.4	24.4	24.5	1	24.7	24.4	24.4	24.5	1	24.7
		1	8	24.5	24.5	24.5	1	24.7	24.5	24.5	24.5	1	24.7
		1	14	24.4	24.4	24.4	1	24.7	24.4	24.4	24.4	1	24.7
		8	0	23.2	23.2	23.2	2	23.7	23.2	23.2	23.2	2	23.7
		8	4	23.3	23.2	23.2	2	23.7	23.3	23.2	23.2	2	23.7
	64QAM	8	7	23.2	23.2	23.3	2	23.7	23.2	23.2	23.3	2	23.7
		15	0	23.2	23.1	23.1	2	23.7	23.2	23.1	23.1	2	23.7
		1	0	23.6	23.5	23.6	2	23.7	23.6	23.5	23.6	2	23.7
		1	8	23.7	23.6	23.7	2	23.7	23.7	23.6	23.7	2	23.7
		1	14	23.6	23.5	23.5	2	23.7	23.6	23.5	23.5	2	23.7
		8	0	22.4	22.4	22.4	3	22.7	22.4	22.4	22.4	3	22.7
	256QAM	8	4	22.5	22.4	22.4	3	22.7	22.5	22.4	22.4	3	22.7
		8	7	22.4	22.4	22.5	3	22.7	22.4	22.4	22.5	3	22.7
		15	0	22.4	22.4	22.4	3	22.7	22.4	22.4	22.4	3	22.7
		1	0	20.4	20.4	20.5	5	20.7	20.4	20.4	20.5	5	20.7
		1	8	20.6	20.6	20.6	5	20.7	20.6	20.6	20.6	5	20.7
		1	14	20.4	20.4	20.5	5	20.7	20.4	20.4	20.5	5	20.7
1.4 MHz	QPSK	8	0	20.4	20.3	20.4	5	20.7	20.4	20.3	20.4	5	20.7
		8	4	20.4	20.4	20.4	5	20.7	20.4	20.4	20.4	5	20.7
		8	7	20.5	20.4	20.4	5	20.7	20.5	20.4	20.4	5	20.7
		15	0	20.4	20.4	20.3	5	20.7	20.4	20.4	20.3	5	20.7
		1	0	25.2	25.1	25.2	0	25.7	25.2	25.1	25.2	0	25.7
		1	3	25.2	25.1	25.2	0	25.7	25.2	25.1	25.2	0	25.7
	16QAM	1	5	25.1	25.1	25.2	0	25.7	25.1	25.1	25.2	0	25.7
		3	0	25.1	25.1	25.2	0	25.7	25.1	25.1	25.2	0	25.7
		3	1	25.1	25.1	25.2	0	25.7	25.1	25.1	25.2	0	25.7
		3	3	25.1	25.1	25.1	0	25.7	25.1	25.1	25.1	0	25.7
		6	0	24.1	24.1	24.1	1	24.7	24.1	24.1	24.1	1	24.7
		1	0	24.5	24.3	24.5	1	24.7	24.5	24.3	24.5	1	24.7
	64QAM	1	3	24.5	24.3	24.5	1	24.7	24.5	24.3	24.5	1	24.7
		1	5	24.5	24.2	24.5	1	24.7	24.5	24.2	24.5	1	24.7
		3	0	24.4	24.3	24.3	1	24.7	24.4	24.3	24.3	1	24.7
		3	1	24.3	24.3	24.3	1	24.7	24.3	24.3	24.3	1	24.7
		3	3	24.3	24.2	24.3	1	24.7	24.3	24.2	24.3	1	24.7
		6	0	23.2	23.2	23.1	2	23.7	23.2	23.2	23.1	2	23.7
	256QAM	1	0	23.4	23.6	23.6	2	23.7	23.4	23.6	23.6	2	23.7
		1	3	23.5	23.6	23.6	2	23.7	23.5	23.6	23.6	2	23.7
		1	5	23.4	23.5	23.6	2	23.7	23.4	23.5	23.6	2	23.7
		3	0	23.5	23.5	23.4	2	23.7	23.5	23.5	23.4	2	23.7
		3	1	23.5	23.4	23.4	2	23.7	23.5	23.4	23.4	2	23.7
		3	3	23.4	23.4	23.4	2	23.7	23.4	23.4	23.4	2	23.7
	QPSK	6	0	22.3	22.4	22.3	3	22.7	22.3	22.4	22.3	3	22.7
		1	0	20.4	20.4	20.4	5	20.7	20.4	20.4	20.4	5	20.7
		1	3	20.5	20.5	20.5	5	20.7	20.5	20.5	20.5	5	20.7
		1	5	20.5	20.4	20.4	5	20.7	20.5	20.4	20.4	5	20.7
		3	0	20.4	20.4	20.4	5	20.7	20.4	20.4	20.4	5	20.7
		3	1	20.4	20.4	20.4	5	20.7	20.4	20.4	20.4	5	20.7
	16QAM	3	3	20.4	20.3	20.4	5	20.7	20.4	20.3	20.4	5	20.7
		6	0	20.5	20.3	20.3	5	20.7	20.5	20.3	20.3	5	20.7

LTE Band 12 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
					23095		MPR	Tune-up Limit		23095		MPR	Tune-up Limit
					707.5 MHz					707.5 MHz			
10 MHz	QPSK	1	0		23.6		0	24.3		24.2		0	24.7
		1	25		23.8		0	24.3		24.3		0	24.7
		1	49		23.7		0	24.3		24.3		0	24.7
		25	0		22.9		0.6	23.7		22.9		1	23.7
		25	12		23.0		0.6	23.7		23.0		1	23.7
		25	25		22.9		0.6	23.7		22.9		1	23.7
	16QAM	50	0		22.9		0.6	23.7		22.9		1	23.7
		1	0		22.9		0.6	23.7		22.9		1	23.7
		1	25		23.0		0.6	23.7		23.0		1	23.7
		1	49		23.0		0.6	23.7		23.0		1	23.7
		25	0		21.6		1.6	22.7		21.6		2	22.7
		25	12		21.6		1.6	22.7		21.6		2	22.7
	64QAM	25	25		21.6		1.6	22.7		21.6		2	22.7
		50	0		21.6		1.6	22.7		21.6		2	22.7
		1	0		22.3		1.6	22.7		22.3		2	22.7
		1	25		22.3		1.6	22.7		22.3		2	22.7
		1	49		22.3		1.6	22.7		22.3		2	22.7
		25	0		21.1		2.6	21.7		21.1		3	21.7
	256QAM	25	12		21.2		2.6	21.7		21.2		3	21.7
		25	25		21.2		2.6	21.7		21.2		3	21.7
		50	0		21.2		2.6	21.7		21.2		3	21.7
		1	0		19.1		4.6	19.7		19.1		5	19.7
		1	25		19.3		4.6	19.7		19.3		5	19.7
		1	49		19.4		4.6	19.7		19.4		5	19.7
		25	0		19.1		4.6	19.7		19.1		5	19.7
		25	12		19.2		4.6	19.7		19.2		5	19.7
		25	25		19.2		4.6	19.7		19.2		5	19.7
		50	0		19.2		4.6	19.7		19.2		5	19.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				23035 701.5 MHz	23095	23155 713.5 MHz	MPR	Tune-up Limit	23035 701.5 MHz	23095	23155 713.5 MHz	MPR	Tune-up Limit
					707.5 MHz					707.5 MHz			
5 MHz	QPSK	1	0	23.4	23.5	23.6	0	24.3	24.1	24.2	24.3	0	24.7
		1	12	23.5	23.6	23.7	0	24.3	24.2	24.3	24.4	0	24.7
		1	24	23.4	23.5	23.6	0	24.3	24.1	24.2	24.3	0	24.7
		12	0	22.4	22.5	22.6	0.6	23.7	22.4	22.5	22.6	1	23.7
		12	7	22.5	22.6	22.7	0.6	23.7	22.5	22.6	22.7	1	23.7
		12	13	22.4	22.5	22.6	0.6	23.7	22.4	22.5	22.6	1	23.7
	16QAM	25	0	22.5	22.6	22.6	0.6	23.7	22.5	22.6	22.6	1	23.7
		1	0	22.8	22.8	23.0	0.6	23.7	22.8	22.8	23.0	1	23.7
		1	12	22.9	23.0	23.2	0.6	23.7	22.9	23.0	23.2	1	23.7
		1	24	22.8	22.9	23.0	0.6	23.7	22.8	22.9	23.0	1	23.7
		12	0	21.4	21.5	21.7	1.6	22.7	21.4	21.5	21.7	2	22.7
		12	7	21.5	21.6	21.8	1.6	22.7	21.5	21.6	21.8	2	22.7
	64QAM	12	13	21.5	21.5	21.7	1.6	22.7	21.5	21.5	21.7	2	22.7
		25	0	21.5	21.6	21.7	1.6	22.7	21.5	21.6	21.7	2	22.7
		1	0	22.2	22.2	22.3	1.6	22.7	22.2	22.2	22.3	2	22.7
		1	12	22.3	22.3	22.3	1.6	22.7	22.3	22.3	22.3	2	22.7
		1	24	22.2	22.3	22.3	1.6	22.7	22.2	22.3	22.3	2	22.7
		12	0	21.0	21.1	21.3	2.6	21.7	21.0	21.1	21.3	3	21.7
	256QAM	12	7	21.1	21.3	21.3	2.6	21.7	21.1	21.3	21.3	3	21.7
		12	13	21.1	21.2	21.3	2.6	21.7	21.1	21.2	21.3	3	21.7
		25	0	21.1	21.2	21.2	2.6	21.7	21.1	21.2	21.2	3	21.7
		1	0	19.3	19.3	19.3	4.6	19.7	19.3	19.3	19.3	5	19.7
		1	12	19.4	19.3	19.4	4.6	19.7	19.4	19.3	19.4	5	19.7
		1	24	19.3	19.3	19.3	4.6	19.7	19.3	19.3	19.3	5	19.7
		12	0	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		12	7	19.2	19.3	19.3	4.6	19.7	19.2	19.3	19.3	5	19.7
		12	13	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		25	0	19.1	19.2	19.2	4.6	19.7	19.1	19.2	19.2	5	19.7

LTE Band 12 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				23025	23095	23165	MPR	Tune-up Limit	23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz			700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	23.3	23.5	23.6	0	24.3	24.1	24.2	24.3	0	24.7
		1	8	23.5	23.6	23.7	0	24.3	24.2	24.3	24.4	0	24.7
		1	14	23.3	23.4	23.5	0	24.3	24.0	24.2	24.2	0	24.7
		8	0	22.4	22.5	22.6	0.6	23.7	22.4	22.5	22.6	1	23.7
		8	4	22.5	22.6	22.7	0.6	23.7	22.5	22.6	22.7	1	23.7
		8	7	22.5	22.6	22.6	0.6	23.7	22.5	22.6	22.6	1	23.7
	16QAM	15	0	22.4	22.5	22.6	0.6	23.7	22.4	22.5	22.6	1	23.7
		1	0	22.7	22.9	22.9	0.6	23.7	22.7	22.9	22.9	1	23.7
		1	8	22.8	23.0	23.0	0.6	23.7	22.8	23.0	23.0	1	23.7
		1	14	22.6	22.9	22.9	0.6	23.7	22.6	22.9	22.9	1	23.7
		8	0	21.5	21.6	21.7	1.6	22.7	21.5	21.6	21.7	2	22.7
		8	4	21.6	21.7	21.7	1.6	22.7	21.6	21.7	21.7	2	22.7
	64QAM	8	7	21.5	21.7	21.7	1.6	22.7	21.5	21.7	21.7	2	22.7
		15	0	21.5	21.7	21.7	1.6	22.7	21.5	21.7	21.7	2	22.7
		1	0	22.3	22.2	22.3	1.6	22.7	22.3	22.2	22.3	2	22.7
		1	8	22.3	22.3	22.4	1.6	22.7	22.3	22.3	22.4	2	22.7
		1	14	22.2	22.2	22.3	1.6	22.7	22.2	22.2	22.3	2	22.7
		8	0	21.0	21.1	21.2	2.6	21.7	21.0	21.1	21.2	3	21.7
	256QAM	8	4	21.1	21.2	21.2	2.6	21.7	21.1	21.2	21.2	3	21.7
		8	7	21.1	21.2	21.3	2.6	21.7	21.1	21.2	21.3	3	21.7
		15	0	21.0	21.2	21.2	2.6	21.7	21.0	21.2	21.2	3	21.7
		1	0	19.1	19.2	19.2	4.6	19.7	19.1	19.2	19.2	5	19.7
		1	8	19.2	19.4	19.4	4.6	19.7	19.2	19.4	19.4	5	19.7
		1	14	19.1	19.2	19.2	4.6	19.7	19.1	19.2	19.2	5	19.7
1.4 MHz	QPSK	8	0	19.0	19.1	19.2	4.6	19.7	19.0	19.1	19.2	5	19.7
		8	4	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		8	7	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		15	0	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
	16QAM	1	0	23.4	23.6	23.6	0	24.3	24.1	24.2	24.3	0	24.7
		1	3	23.4	23.6	23.6	0	24.3	24.1	24.3	24.4	0	24.7
		1	5	23.4	23.5	23.6	0	24.3	24.1	24.2	24.4	0	24.7
		3	0	23.4	23.6	23.6	0	24.3	24.1	24.2	24.3	0	24.7
		3	1	23.4	23.6	23.7	0	24.3	24.1	24.3	24.4	0	24.7
		3	3	23.4	23.6	23.6	0	24.3	24.1	24.2	24.3	0	24.7
	64QAM	6	0	22.4	22.5	22.6	0.6	23.7	22.4	22.5	22.6	1	23.7
		1	0	22.8	22.9	22.8	0.6	23.7	22.8	22.9	22.8	1	23.7
		1	3	22.7	22.9	22.8	0.6	23.7	22.7	22.9	22.8	1	23.7
		1	5	22.7	22.9	22.8	0.6	23.7	22.7	22.9	22.8	1	23.7
		3	0	22.6	22.7	22.8	0.6	23.7	22.6	22.7	22.8	1	23.7
		3	1	22.6	22.8	22.8	0.6	23.7	22.6	22.8	22.8	1	23.7
	256QAM	3	3	22.6	22.7	22.8	0.6	23.7	22.6	22.7	22.8	1	23.7
		6	0	21.5	21.6	21.7	1.6	22.7	21.5	21.6	21.7	2	22.7
		1	0	22.1	22.3	22.3	1.6	22.7	22.1	22.3	22.3	2	22.7
		1	3	22.1	22.3	22.3	1.6	22.7	22.1	22.3	22.3	2	22.7
		1	5	22.0	22.2	22.3	1.6	22.7	22.0	22.2	22.3	2	22.7
		3	0	22.1	22.3	22.3	1.6	22.7	22.1	22.3	22.3	2	22.7
1.4 MHz	64QAM	3	1	22.1	22.3	22.3	1.6	22.7	22.1	22.3	22.3	2	22.7
		3	3	22.1	22.3	22.3	1.6	22.7	22.1	22.3	22.3	2	22.7
		6	0	21.0	21.2	21.2	2.6	21.7	21.0	21.2	21.2	3	21.7
	256QAM	1	0	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		1	3	19.2	19.3	19.3	4.6	19.7	19.2	19.3	19.3	5	19.7
		1	5	19.1	19.3	19.3	4.6	19.7	19.1	19.3	19.3	5	19.7
	256QAM	3	0	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		3	1	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		3	3	19.1	19.2	19.3	4.6	19.7	19.1	19.2	19.3	5	19.7
		6	0	19.0	19.2	19.3	4.6	19.7	19.0	19.2	19.3	5	19.7

LTE Band 13 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23230 782 MHz		MPR	Tune-up Limit	23230 782 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	25.3		0	25.7	25.3		0	25.7
		1	25	25.4		0	25.7	25.4		0	25.7
		1	49	25.3		0	25.7	25.3		0	25.7
		25	0	24.3		1	24.7	24.3		1	24.7
		25	12	24.4		1	24.7	24.4		1	24.7
		25	25	24.4		1	24.7	24.4		1	24.7
	16QAM	50	0	24.4		1	24.7	24.4		1	24.7
		1	0	24.7		1	24.7	24.7		1	24.7
		1	25	24.7		1	24.7	24.7		1	24.7
		1	49	24.7		1	24.7	24.7		1	24.7
		25	0	23.3		2	23.7	23.3		2	23.7
		25	12	23.4		2	23.7	23.4		2	23.7
	64QAM	25	25	23.4		2	23.7	23.4		2	23.7
		50	0	23.4		2	23.7	23.4		2	23.7
		1	0	23.5		2	23.7	23.5		2	23.7
		1	25	23.6		2	23.7	23.6		2	23.7
		1	49	23.5		2	23.7	23.5		2	23.7
		25	0	22.3		3	22.7	22.3		3	22.7
	256QAM	25	12	22.4		3	22.7	22.4		3	22.7
		25	25	22.4		3	22.7	22.4		3	22.7
		50	0	22.3		3	22.7	22.3		3	22.7
		1	0	20.4		5	20.7	20.4		5	20.7
		1	25	20.6		5	20.7	20.6		5	20.7
		1	49	20.5		5	20.7	20.5		5	20.7
		25	0	20.3		5	20.7	20.3		5	20.7
		25	12	20.4		5	20.7	20.4		5	20.7
		25	25	20.4		5	20.7	20.4		5	20.7
		50	0	20.3		5	20.7	20.3		5	20.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23230 782 MHz		MPR	Tune-up Limit	23230 782 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	25.3		0	25.7	25.3		0	25.7
		1	12	25.4		0	25.7	25.4		0	25.7
		1	24	25.4		0	25.7	25.4		0	25.7
		12	0	24.3		1	24.7	24.3		1	24.7
		12	7	24.3		1	24.7	24.3		1	24.7
		12	13	24.4		1	24.7	24.4		1	24.7
	16QAM	25	0	24.3		1	24.7	24.3		1	24.7
		1	0	24.7		1	24.7	24.7		1	24.7
		1	12	24.7		1	24.7	24.7		1	24.7
		1	24	24.7		1	24.7	24.7		1	24.7
		12	0	23.2		2	23.7	23.2		2	23.7
		12	7	23.3		2	23.7	23.3		2	23.7
	64QAM	12	13	23.4		2	23.7	23.4		2	23.7
		25	0	23.3		2	23.7	23.3		2	23.7
		1	0	23.6		2	23.7	23.6		2	23.7
		1	12	23.6		2	23.7	23.6		2	23.7
		1	24	23.6		2	23.7	23.6		2	23.7
		12	0	22.4		3	22.7	22.4		3	22.7
	256QAM	12	7	22.4		3	22.7	22.4		3	22.7
		12	13	22.4		3	22.7	22.4		3	22.7
		25	0	22.3		3	22.7	22.3		3	22.7
		1	0	20.4		5	20.7	20.4		5	20.7
		1	12	20.6		5	20.7	20.6		5	20.7
		1	24	20.4		5	20.7	20.4		5	20.7
		12	0	20.3		5	20.7	20.3		5	20.7
		12	7	20.4		5	20.7	20.4		5	20.7
		12	13	20.4		5	20.7	20.4		5	20.7
		25	0	20.4		5	20.7	20.4		5	20.7

LTE Band 13 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23230 782 MHz		MPR	Tune-up Limit	23230 782 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	23.6		0	24.5	23.6		0	24.7
		1	25	23.6		0	24.5	23.7		0	24.7
		1	49	23.6		0	24.5	23.6		0	24.7
		25	0	23.0		0.8	23.7	23.0		1	23.7
		25	12	23.1		0.8	23.7	23.1		1	23.7
		25	25	23.0		0.8	23.7	23.0		1	23.7
	16QAM	50	0	23.1		0.8	23.7	23.1		1	23.7
		1	0	23.1		0.8	23.7	23.1		1	23.7
		1	25	23.1		0.8	23.7	23.1		1	23.7
		1	49	23.1		0.8	23.7	23.1		1	23.7
		25	0	22.1		1.8	22.7	22.1		2	22.7
		25	12	22.1		1.8	22.7	22.1		2	22.7
	64QAM	25	25	22.2		1.8	22.7	22.2		2	22.7
		50	0	22.1		1.8	22.7	22.1		2	22.7
		1	0	22.2		1.8	22.7	22.2		2	22.7
		1	25	22.2		1.8	22.7	22.2		2	22.7
		1	49	22.2		1.8	22.7	22.2		2	22.7
		25	0	20.9		2.8	21.7	20.9		3	21.7
	256QAM	25	12	20.9		2.8	21.7	20.9		3	21.7
		25	25	21.0		2.8	21.7	21.0		3	21.7
		50	0	20.9		2.8	21.7	20.9		3	21.7
		1	0	18.9		4.8	19.7	18.9		5	19.7
		1	25	19.2		4.8	19.7	19.2		5	19.7
		1	49	19.1		4.8	19.7	19.1		5	19.7
		25	0	18.9		4.8	19.7	18.9		5	19.7
		25	12	18.9		4.8	19.7	18.9		5	19.7
		25	25	19.0		4.8	19.7	19.0		5	19.7
		50	0	19.0		4.8	19.7	19.0		5	19.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23230 782 MHz		MPR	Tune-up Limit	23230 782 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	23.3		0	24.5	23.6		0	24.7
		1	12	23.5		0	24.5	23.7		0	24.7
		1	24	23.3		0	24.5	23.6		0	24.7
		12	0	23.3		0.8	23.7	23.3		1	23.7
		12	7	23.4		0.8	23.7	23.4		1	23.7
		12	13	23.4		0.8	23.7	23.4		1	23.7
	16QAM	25	0	23.3		0.8	23.7	23.3		1	23.7
		1	0	23.4		0.8	23.7	23.4		1	23.7
		1	12	23.4		0.8	23.7	23.4		1	23.7
		1	24	23.3		0.8	23.7	23.3		1	23.7
		12	0	22.3		1.8	22.7	22.3		2	22.7
		12	7	22.4		1.8	22.7	22.4		2	22.7
	64QAM	12	13	22.4		1.8	22.7	22.4		2	22.7
		25	0	22.3		1.8	22.7	22.3		2	22.7
		1	0	22.4		1.8	22.7	22.4		2	22.7
		1	12	22.5		1.8	22.7	22.5		2	22.7
		1	24	22.4		1.8	22.7	22.4		2	22.7
		12	0	21.2		2.8	21.7	21.2		3	21.7
	256QAM	12	7	21.3		2.8	21.7	21.3		3	21.7
		12	13	21.3		2.8	21.7	21.3		3	21.7
		25	0	21.2		2.8	21.7	21.2		3	21.7
		1	0	19.3		4.8	19.7	19.3		5	19.7
		1	12	19.5		4.8	19.7	19.5		5	19.7
		1	24	19.3		4.8	19.7	19.3		5	19.7
		12	0	19.2		4.8	19.7	19.2		5	19.7
		12	7	19.3		4.8	19.7	19.3		5	19.7
		12	13	19.3		4.8	19.7	19.3		5	19.7
		25	0	19.2		4.8	19.7	19.2		5	19.7

LTE Band 14 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23330	793 MHz	MPR	Tune-up Limit	23330	793 MHz	MPR	Tune-up Limit
10 MHz	QPSK	1	0	25.2		0	25.7	25.2		0	25.7
		1	25	25.2		0	25.7	25.2		0	25.7
		1	49	25.2		0	25.7	25.2		0	25.7
		25	0	24.3		1	24.7	24.3		1	24.7
		25	12	24.3		1	24.7	24.3		1	24.7
		25	25	24.2		1	24.7	24.2		1	24.7
	16QAM	50	0	24.2		1	24.7	24.2		1	24.7
		1	0	24.7		1	24.7	24.7		1	24.7
		1	25	24.5		1	24.7	24.5		1	24.7
		1	49	24.6		1	24.7	24.6		1	24.7
		25	0	23.3		2	23.7	23.3		2	23.7
		25	12	23.3		2	23.7	23.3		2	23.7
	64QAM	25	25	23.2		2	23.7	23.2		2	23.7
		50	0	23.2		2	23.7	23.2		2	23.7
		1	0	23.5		2	23.7	23.5		2	23.7
		1	25	23.5		2	23.7	23.5		2	23.7
		1	49	23.4		2	23.7	23.4		2	23.7
		25	0	22.3		3	22.7	22.3		3	22.7
	256QAM	25	12	22.3		3	22.7	22.3		3	22.7
		25	25	22.2		3	22.7	22.2		3	22.7
		50	0	22.2		3	22.7	22.2		3	22.7
		1	0	20.3		5	20.7	20.3		5	20.7
		1	25	20.4		5	20.7	20.4		5	20.7
		1	49	20.4		5	20.7	20.4		5	20.7
		25	0	20.3		5	20.7	20.3		5	20.7
		25	12	20.3		5	20.7	20.3		5	20.7
		25	25	20.2		5	20.7	20.2		5	20.7
		50	0	20.2		5	20.7	20.2		5	20.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23330	793 MHz	MPR	Tune-up Limit	23330	793 MHz	MPR	Tune-up Limit
5 MHz	QPSK	1	0	25.3		0	25.7	25.3		0	25.7
		1	12	25.3		0	25.7	25.3		0	25.7
		1	24	25.2		0	25.7	25.2		0	25.7
		12	0	24.3		1	24.7	24.3		1	24.7
		12	7	24.3		1	24.7	24.3		1	24.7
		12	13	24.2		1	24.7	24.2		1	24.7
	16QAM	25	0	24.2		1	24.7	24.2		1	24.7
		1	0	24.7		1	24.7	24.7		1	24.7
		1	12	24.7		1	24.7	24.7		1	24.7
		1	24	24.5		1	24.7	24.5		1	24.7
		12	0	23.2		2	23.7	23.2		2	23.7
		12	7	23.2		2	23.7	23.2		2	23.7
	64QAM	12	13	23.1		2	23.7	23.1		2	23.7
		25	0	23.2		2	23.7	23.2		2	23.7
		1	0	23.5		2	23.7	23.5		2	23.7
		1	12	23.5		2	23.7	23.5		2	23.7
		1	24	23.4		2	23.7	23.4		2	23.7
		12	0	22.3		3	22.7	22.3		3	22.7
	256QAM	12	7	22.4		3	22.7	22.4		3	22.7
		12	13	22.3		3	22.7	22.3		3	22.7
		25	0	22.3		3	22.7	22.3		3	22.7
		1	0	20.4		5	20.7	20.4		5	20.7
		1	12	20.4		5	20.7	20.4		5	20.7
		1	24	20.3		5	20.7	20.3		5	20.7
		12	0	20.3		5	20.7	20.3		5	20.7
		12	7	20.3		5	20.7	20.3		5	20.7
		12	13	20.3		5	20.7	20.3		5	20.7
		25	0	20.3		5	20.7	20.3		5	20.7

LTE Band 14 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23330 793 MHz		MPR	Tune-up Limit	23330 793 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	23.5		0	24.5	23.5		0	24.7
		1	25	23.5		0	24.5	23.5		0	24.7
		1	49	23.4		0	24.5	23.4		0	24.7
		25	0	23.5		0.8	23.7	23.5		1	23.7
		25	12	23.6		0.8	23.7	23.6		1	23.7
		25	25	23.5		0.8	23.7	23.5		1	23.7
	16QAM	50	0	23.5		0.8	23.7	23.5		1	23.7
		1	0	23.5		0.8	23.7	23.5		1	23.7
		1	25	23.5		0.8	23.7	23.5		1	23.7
		1	49	23.4		0.8	23.7	23.4		1	23.7
		25	0	22.5		1.8	22.7	22.5		2	22.7
		25	12	22.6		1.8	22.7	22.6		2	22.7
	64QAM	25	25	22.6		1.8	22.7	22.6		2	22.7
		50	0	22.5		1.8	22.7	22.5		2	22.7
		1	0	22.5		1.8	22.7	22.5		2	22.7
		1	25	22.4		1.8	22.7	22.4		2	22.7
		1	49	22.4		1.8	22.7	22.4		2	22.7
		25	0	21.2		2.8	21.7	21.2		3	21.7
	256QAM	25	12	21.3		2.8	21.7	21.3		3	21.7
		25	25	21.2		2.8	21.7	21.2		3	21.7
		50	0	21.2		2.8	21.7	21.2		3	21.7
		1	0	19.4		4.8	19.7	19.4		5	19.7
		1	25	19.4		4.8	19.7	19.4		5	19.7
		1	49	19.4		4.8	19.7	19.4		5	19.7
		25	0	19.2		4.8	19.7	19.2		5	19.7
		25	12	19.3		4.8	19.7	19.3		5	19.7
		25	25	19.2		4.8	19.7	19.2		5	19.7
		50	0	19.2		4.8	19.7	19.2		5	19.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				23330 793 MHz		MPR	Tune-up Limit	23330 793 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	23.5		0	24.5	23.5		0	24.7
		1	12	23.6		0	24.5	23.6		0	24.7
		1	24	23.4		0	24.5	23.4		0	24.7
		12	0	23.5		0.8	23.7	23.5		1	23.7
		12	7	23.5		0.8	23.7	23.5		1	23.7
		12	13	23.5		0.8	23.7	23.5		1	23.7
	16QAM	25	0	23.5		0.8	23.7	23.5		1	23.7
		1	0	23.5		0.8	23.7	23.5		1	23.7
		1	12	23.5		0.8	23.7	23.5		1	23.7
		1	24	22.4		0.8	23.7	22.4		1	23.7
		12	0	22.6		1.8	22.7	22.6		2	22.7
		12	7	22.6		1.8	22.7	22.6		2	22.7
	64QAM	12	13	22.5		1.8	22.7	22.5		2	22.7
		25	0	22.5		1.8	22.7	22.5		2	22.7
		1	0	22.3		1.8	22.7	22.3		2	22.7
		1	12	22.4		1.8	22.7	22.4		2	22.7
		1	24	22.3		1.8	22.7	22.3		2	22.7
		12	0	21.3		2.8	21.7	21.3		3	21.7
	256QAM	12	7	21.3		2.8	21.7	21.3		3	21.7
		12	13	21.2		2.8	21.7	21.2		3	21.7
		25	0	21.2		2.8	21.7	21.2		3	21.7
		1	0	19.3		4.8	19.7	19.3		5	19.7
		1	12	19.4		4.8	19.7	19.4		5	19.7
		1	24	19.3		4.8	19.7	19.3		5	19.7
		12	0	19.3		4.8	19.7	19.3		5	19.7
		12	7	19.3		4.8	19.7	19.3		5	19.7
		12	13	19.2		4.8	19.7	19.2		5	19.7
		25	0	19.2		4.8	19.7	19.2		5	19.7

LTE Band 25 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26140	26365	26590	MPR	Tune-up Limit	26140	26365	26590	MPR	Tune-up Limit
				1860 MHz	1882.5 MHz	1905 MHz			1860 MHz	1882.5 MHz	1905 MHz		
20 MHz	QPSK	1	0	25.3	25.1	25.3	0	25.7	18.5	18.4	18.4	0	19
		1	49	25.3	25.3	25.3	0	25.7	18.5	18.5	18.5	0	19
		1	99	25.3	25.3	25.3	0	25.7	18.4	18.4	18.4	0	19
		50	0	24.4	24.3	24.3	1	24.7	18.5	18.5	18.4	0	19
		50	24	24.4	24.4	24.3	1	24.7	18.5	18.5	18.5	0	19
		50	50	24.4	24.3	24.2	1	24.7	18.6	18.5	18.5	0	19
	16QAM	100	0	24.4	24.4	24.2	1	24.7	18.5	18.5	18.5	0	19
		1	0	24.6	24.7	24.7	1	24.7	18.5	18.5	18.6	0	19
		1	49	24.7	24.7	24.7	1	24.7	18.5	18.5	18.5	0	19
		1	99	24.6	24.7	24.7	1	24.7	18.5	18.4	18.4	0	19
		50	0	23.5	23.3	23.4	2	23.7	18.3	18.1	18.1	0	19
		50	24	23.5	23.3	23.5	2	23.7	18.4	18.1	18.2	0	19
	64QAM	50	50	23.5	23.4	23.5	2	23.7	18.4	18.2	18.2	0	19
		100	0	23.4	23.4	23.5	2	23.7	18.4	18.2	18.3	0	19
		1	0	23.6	23.5	23.5	2	23.7	18.4	18.4	18.4	0	19
		1	49	23.7	23.6	23.6	2	23.7	18.4	18.5	18.7	0	19
		1	99	23.5	23.5	23.6	2	23.7	18.4	18.4	18.5	0	19
		50	0	22.4	22.3	22.4	3	22.7	18.3	18.2	18.3	0	19
	256QAM	50	24	22.5	22.3	22.5	3	22.7	18.4	18.3	18.4	0	19
		50	50	22.4	22.4	22.4	3	22.7	18.3	18.3	18.4	0	19
		100	0	22.4	22.4	22.5	3	22.7	18.4	18.3	18.4	0	19
		1	0	20.6	20.6	20.4	5	20.7	18.5	18.5	18.5	0	19
		1	49	20.6	20.6	20.5	5	20.7	18.3	18.5	18.6	0	19
		1	99	20.6	20.6	20.6	5	20.7	18.4	18.5	18.6	0	19
15 MHz	QPSK	50	0	20.5	20.3	20.4	5	20.7	18.4	18.2	18.3	0	19
		50	24	20.5	20.3	20.5	5	20.7	18.4	18.3	18.4	0	19
		50	50	20.4	20.4	20.5	5	20.7	18.4	18.3	18.4	0	19
		100	0	20.5	20.4	20.5	5	20.7	18.4	18.3	18.4	0	19
	16QAM	1	0	25.4	25.2	25.3	0	25.7	18.3	18.1	18.2	0	19
		1	37	25.4	25.3	25.4	0	25.7	18.2	18.2	18.2	0	19
		1	74	25.4	25.3	25.4	0	25.7	18.1	18.2	18.2	0	19
		36	0	24.4	24.3	24.3	1	24.7	18.2	18.2	18.1	0	19
		36	20	24.4	24.3	24.4	1	24.7	18.2	18.2	18.1	0	19
		36	39	24.4	24.4	24.4	1	24.7	18.2	18.3	18.2	0	19
	64QAM	75	0	24.4	24.3	24.3	1	24.7	18.2	18.2	18.1	0	19
		1	0	24.6	24.7	24.6	1	24.7	18.5	18.5	18.5	0	19
		1	37	24.6	24.7	24.7	1	24.7	18.5	18.6	18.6	0	19
		1	74	24.6	24.7	24.7	1	24.7	18.5	18.5	18.5	0	19
		36	0	23.4	23.3	23.4	2	23.7	18.3	18.1	18.2	0	19
		36	20	23.4	23.3	23.4	2	23.7	18.3	18.1	18.2	0	19
	256QAM	36	39	23.4	23.4	23.5	2	23.7	18.3	18.1	18.3	0	19
		75	0	23.4	23.4	23.4	2	23.7	18.3	18.2	18.2	0	19
		1	0	23.5	23.5	23.6	2	23.7	18.6	18.4	18.3	0	19
		1	37	23.5	23.6	23.6	2	23.7	18.6	18.5	18.3	0	19
		1	74	23.5	23.5	23.5	2	23.7	18.5	18.5	18.4	0	19
		36	0	22.4	22.3	22.3	3	22.7	18.4	18.2	18.2	0	19
15 MHz	64QAM	36	20	22.5	22.3	22.4	3	22.7	18.4	18.2	18.2	0	19
		36	39	22.4	22.4	22.4	3	22.7	18.4	18.2	18.3	0	19
		75	0	22.4	22.4	22.4	3	22.7	18.3	18.3	18.2	0	19
	256QAM	1	0	20.6	20.5	20.5	5	20.7	18.5	18.3	18.3	0	19
		1	37	20.5	20.5	20.5	5	20.7	18.5	18.4	18.4	0	19
		1	74	20.5	20.6	20.6	5	20.7	18.5	18.4	18.4	0	19
	256QAM	36	0	20.4	20.3	20.3	5	20.7	18.4	18.2	18.2	0	19
		36	20	20.5	20.3	20.4	5	20.7	18.4	18.3	18.3	0	19
		36	39	20.4	20.4	20.4	5	20.7	18.4	18.2	18.3	0	19
		75	0	20.4	20.4	20.3	5	20.7	18.4	18.2	18.2	0	19

LTE Band 25 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26090	26365	26640	MPR	Tune-up Limit	26090	26365	26640	MPR	Tune-up Limit
				1855 MHz	1882.5 MHz	1910 MHz			1855 MHz	1882.5 MHz	1910 MHz		
10 MHz	QPSK	1	0	25.4	25.4	25.5	0	25.7	18.3	18.3	18.3	0	19
		1	25	25.4	25.4	25.5	0	25.7	18.2	18.3	18.4	0	19
		1	49	25.3	25.4	25.5	0	25.7	18.2	18.3	18.4	0	19
		25	0	24.4	24.4	24.5	1	24.7	18.4	18.3	18.3	0	19
		25	12	24.4	24.4	24.5	1	24.7	18.4	18.3	18.3	0	19
		25	25	24.4	24.5	24.5	1	24.7	18.4	18.4	18.4	0	19
	16QAM	1	0	24.4	24.4	24.5	1	24.7	18.4	18.3	18.3	0	19
		1	25	24.7	24.7	24.7	1	24.7	18.5	18.4	18.5	0	19
		1	49	24.6	24.7	24.7	1	24.7	18.4	18.4	18.5	0	19
		25	0	24.7	24.7	24.7	1	24.7	18.4	18.4	18.5	0	19
		25	12	23.5	23.4	23.5	2	23.7	18.5	18.3	18.4	0	19
		25	25	23.5	23.4	23.5	2	23.7	18.5	18.3	18.4	0	19
	64QAM	1	0	23.5	23.4	23.5	2	23.7	18.5	18.3	18.3	0	19
		1	25	23.5	23.4	23.5	2	23.7	18.4	18.4	18.5	0	19
		1	49	23.5	23.4	23.5	2	23.7	18.4	18.4	18.5	0	19
		25	0	23.5	23.4	23.5	2	23.7	18.4	18.4	18.5	0	19
		25	12	22.6	22.4	22.5	3	22.7	18.5	18.4	18.4	0	19
		25	25	22.6	22.5	22.6	3	22.7	18.5	18.4	18.5	0	19
	256QAM	1	0	22.6	22.4	22.5	3	22.7	18.5	18.4	18.4	0	19
		1	25	20.6	20.5	20.5	5	20.7	18.6	18.4	18.5	0	19
		1	49	20.7	20.6	20.7	5	20.7	18.6	18.5	18.6	0	19
		25	0	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	12	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	25	20.5	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19
5 MHz	QPSK	1	0	20.5	20.4	20.5	5	20.7	18.5	18.3	18.4	0	19
		1	25	20.5	20.4	20.5	5	20.7	18.5	18.3	18.4	0	19
		1	49	20.6	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19
		25	0	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	12	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	25	20.5	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19
	16QAM	1	0	20.5	20.4	20.5	5	20.7	18.5	18.3	18.4	0	19
		1	25	20.6	20.5	20.6	5	20.7	18.6	18.4	18.5	0	19
		1	49	20.7	20.6	20.7	5	20.7	18.6	18.5	18.6	0	19
		25	0	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	12	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	25	20.5	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19
	64QAM	1	0	20.5	20.4	20.5	5	20.7	18.5	18.3	18.4	0	19
		1	25	20.6	20.5	20.6	5	20.7	18.6	18.4	18.5	0	19
		1	49	20.7	20.6	20.7	5	20.7	18.6	18.5	18.6	0	19
		25	0	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	12	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	25	20.5	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19
	256QAM	1	0	20.5	20.4	20.5	5	20.7	18.5	18.3	18.4	0	19
		1	25	20.6	20.5	20.6	5	20.7	18.6	18.4	18.5	0	19
		1	49	20.7	20.6	20.7	5	20.7	18.6	18.5	18.6	0	19
		25	0	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	12	20.6	20.4	20.5	5	20.7	18.5	18.4	18.4	0	19
		25	25	20.5	20.5	20.6	5	20.7	18.5	18.5	18.5	0	19

LTE Band 25 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26055	26365	26675	MPR	Tune-up Limit	26055	26365	26675	MPR	Tune-up Limit
				1851.5 MHz	1882.5 MHz	1913.5 MHz			1851.5 MHz	1882.5 MHz	1913.5 MHz		
3 MHz	QPSK	1	0	25.4	25.2	25.4	0	25.7	18.4	18.2	18.2	0	19
		1	8	25.4	25.3	25.5	0	25.7	18.5	18.3	18.3	0	19
		1	14	25.3	25.3	25.4	0	25.7	18.4	18.2	18.2	0	19
		8	0	24.4	24.3	24.4	1	24.7	18.5	18.2	18.2	0	19
		8	4	24.4	24.3	24.5	1	24.7	18.5	18.3	18.2	0	19
		8	7	24.4	24.3	24.5	1	24.7	18.5	18.3	18.2	0	19
	16QAM	15	0	24.4	24.2	24.4	1	24.7	18.5	18.3	18.2	0	19
		1	0	24.7	24.7	24.6	1	24.7	18.4	18.4	18.3	0	19
		1	8	24.7	24.7	24.7	1	24.7	18.5	18.5	18.4	0	19
		1	14	24.7	24.6	24.7	1	24.7	18.4	18.4	18.3	0	19
		8	0	23.4	23.3	23.4	2	23.7	18.5	18.2	18.3	0	19
		8	4	23.5	23.3	23.5	2	23.7	18.6	18.1	18.4	0	19
	64QAM	8	7	23.5	23.3	23.5	2	23.7	18.6	18.2	18.4	0	19
		15	0	23.5	23.3	23.4	2	23.7	18.5	18.2	18.4	0	19
		1	0	23.7	23.5	23.6	2	23.7	18.6	18.4	18.3	0	19
		1	8	23.7	23.6	23.7	2	23.7	18.4	18.4	18.4	0	19
		1	14	23.7	23.6	23.7	2	23.7	18.4	18.4	18.3	0	19
		8	0	22.6	22.4	22.4	3	22.7	18.3	18.2	18.2	0	19
1.4 MHz	QPSK	8	4	22.6	22.4	22.6	3	22.7	18.4	18.2	18.3	0	19
		8	7	22.6	22.4	22.5	3	22.7	18.4	18.2	18.3	0	19
		15	0	22.5	22.4	22.5	3	22.7	18.3	18.1	18.3	0	19
	16QAM	1	0	20.6	20.5	20.5	5	20.7	18.3	18.2	18.4	0	19
		1	8	20.6	20.6	20.6	5	20.7	18.4	18.3	18.4	0	19
		1	14	20.6	20.5	20.6	5	20.7	18.4	18.3	18.4	0	19
	64QAM	8	0	20.5	20.4	20.4	5	20.7	18.3	18.1	18.3	0	19
		8	4	20.5	20.4	20.5	5	20.7	18.4	18.2	18.4	0	19
		8	7	20.6	20.4	20.5	5	20.7	18.4	18.2	18.4	0	19
	256QAM	15	0	20.5	20.4	20.5	5	20.7	18.3	18.2	18.3	0	19
		1	0	25.4	25.3	25.3	0	25.7	18.4	18.2	18.3	0	19
	QPSK	1	3	25.2	25.3	25.4	0	25.7	18.5	18.3	18.3	0	19
		1	5	25.3	25.3	25.4	0	25.7	18.3	18.2	18.3	0	19
		3	0	25.3	25.3	25.3	0	25.7	18.3	18.3	18.3	0	19
		3	1	25.3	25.3	25.3	0	25.7	18.3	18.3	18.3	0	19
		3	3	25.3	25.3	25.4	0	25.7	18.3	18.3	18.3	0	19
	16QAM	6	0	24.4	24.2	24.3	1	24.7	18.3	18.2	18.3	0	19
		1	0	24.6	24.5	24.7	1	24.7	18.3	18.4	18.4	0	19
		1	3	24.7	24.5	24.7	1	24.7	18.3	18.4	18.5	0	19
		1	5	24.7	24.6	24.7	1	24.7	18.3	18.4	18.5	0	19
		3	0	24.6	24.5	24.6	1	24.7	18.5	18.5	18.5	0	19
		3	1	24.6	24.5	24.6	1	24.7	18.5	18.5	18.6	0	19
1.4 MHz	64QAM	3	3	24.6	24.5	24.6	1	24.7	18.6	18.5	18.5	0	19
		6	0	23.5	23.2	23.3	2	23.7	18.4	18.2	18.4	0	19
		1	0	23.6	23.6	23.6	2	23.7	18.4	18.5	18.4	0	19
		1	3	23.6	23.6	23.6	2	23.7	18.3	18.5	18.4	0	19
		1	5	23.6	23.6	23.6	2	23.7	18.3	18.4	18.4	0	19
		3	0	23.6	23.5	23.5	2	23.7	18.3	18.4	18.3	0	19
	256QAM	3	1	23.7	23.5	23.5	2	23.7	18.3	18.4	18.3	0	19
		3	3	23.7	23.5	23.5	2	23.7	18.3	18.4	18.4	0	19
		6	0	22.5	22.4	22.3	3	22.7	18.3	18.0	18.2	0	19
		1	0	20.5	20.4	20.6	5	20.7	18.3	18.2	18.4	0	19
		1	3	20.5	20.5	20.7	5	20.7	18.4	18.3	18.4	0	19
		1	5	20.5	20.6	20.6	5	20.7	18.3	18.2	18.4	0	19
	256QAM	3	0	20.5	20.3	20.4	5	20.7	18.3	18.1	18.3	0	19
		3	1	20.5	20.5	20.4	5	20.7	18.4	18.2	18.4	0	19
		3	3	20.5	20.5	20.5	5	20.7	18.4	18.2	18.4	0	19
		6	0	20.5	20.2	20.4	5	20.7	18.4	18.0	18.2	0	19

LTE Band 25 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26140	26365	26590	MPR	Tune-up Limit	26140	26365	26590	MPR	Tune-up Limit
				1860 MHz	1882.5 MHz	1905 MHz			1860 MHz	1882.5 MHz	1905 MHz		
20 MHz	QPSK	1	0	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		1	49	20.8	20.9	20.7	0	21.5	21.1	21.2	21.1	0	21.7
		1	99	20.8	20.7	20.6	0	21.5	21.1	21.0	21.0	0	21.7
		50	0	20.8	20.9	20.7	0	21.5	21.1	21.2	21.0	0	21.7
		50	24	20.9	20.9	20.7	0	21.5	21.2	21.2	21.0	0	21.7
		50	50	20.9	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
	16QAM	100	0	20.8	20.8	20.7	0	21.5	21.1	21.2	21.0	0	21.7
		1	0	20.8	20.9	20.7	0	21.5	20.8	20.9	20.7	0	21.7
		1	49	20.9	20.8	20.7	0	21.5	21.0	21.1	21.0	0	21.7
		1	99	20.7	20.8	20.7	0	21.5	20.7	20.8	20.6	0	21.7
		50	0	20.7	20.8	20.6	0.1	21.4	20.7	20.8	20.6	0.3	21.4
		50	24	20.8	20.8	20.6	0.1	21.4	20.8	20.8	20.6	0.3	21.4
	64QAM	50	50	20.8	20.7	20.6	0.1	21.4	20.8	20.8	20.7	0.3	21.4
		100	0	20.8	20.8	20.6	0.1	21.4	20.8	20.8	20.6	0.3	21.4
		1	0	20.7	20.7	20.8	0.1	21.4	20.7	20.8	20.8	0.3	21.4
		1	49	20.8	20.7	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	99	20.7	20.8	20.8	0.1	21.4	20.8	20.7	20.7	0.3	21.4
		50	0	20.1	20.0	20.1	1.1	20.4	20.0	20.0	20.0	1.3	20.4
	256QAM	50	24	20.1	20.0	20.1	1.1	20.4	20.1	20.0	20.0	1.3	20.4
		50	50	20.1	20.1	20.1	1.1	20.4	20.1	20.1	20.1	1.3	20.4
		100	0	20.1	20.0	20.0	1.1	20.4	20.1	20.0	20.0	1.3	20.4
		1	0	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	49	18.1	18.1	18.1	3.1	18.4	18.0	18.1	18.1	3.3	18.4
		1	99	18.1	18.1	18.1	3.1	18.4	18.1	18.0	18.0	3.3	18.4
15 MHz	QPSK	50	0	18.1	18.0	18.1	3.1	18.4	18.0	18.0	18.0	3.3	18.4
		50	24	18.1	18.0	18.1	3.1	18.4	18.1	18.0	18.0	3.3	18.4
		50	50	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		100	0	18.1	18.0	18.1	3.1	18.4	18.1	18.0	18.0	3.3	18.4
	16QAM	1	0	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		1	37	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		1	74	20.7	20.6	20.6	0	21.5	21.1	21.0	20.9	0	21.7
		36	0	20.9	20.8	20.7	0	21.5	21.2	21.2	21.0	0	21.7
		36	20	20.9	20.8	20.7	0	21.5	21.2	21.2	21.0	0	21.7
		36	39	20.9	20.8	20.7	0	21.5	21.2	21.1	21.1	0	21.7
	64QAM	75	0	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		1	0	20.8	20.9	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		1	37	20.8	20.8	20.7	0	21.5	21.0	21.1	21.0	0	21.7
		1	74	20.8	20.7	20.6	0	21.5	21.0	20.9	20.9	0	21.7
		36	0	20.8	20.8	20.6	0.1	21.4	20.8	20.8	20.6	0.3	21.4
		36	20	20.8	20.8	20.6	0.1	21.4	20.8	20.8	20.6	0.3	21.4
	256QAM	36	39	20.8	20.7	20.6	0.1	21.4	20.8	20.7	20.7	0.3	21.4
		75	0	20.7	20.7	20.6	0.1	21.4	20.8	20.7	20.6	0.3	21.4
		1	0	20.7	20.7	20.8	0.1	21.4	21.0	21.0	21.1	0.3	21.4
		1	37	20.7	20.8	20.7	0.1	21.4	21.1	21.1	21.1	0.3	21.4
		1	74	20.7	20.7	20.8	0.1	21.4	21.1	21.0	21.0	0.3	21.4
		36	0	20.0	20.1	20.1	1.1	20.4	19.9	20.0	20.0	1.3	20.4
15 MHz	64QAM	36	20	20.1	20.1	20.1	1.1	20.4	20.0	20.0	20.1	1.3	20.4
		36	39	20.1	20.1	20.1	1.1	20.4	20.0	20.1	20.1	1.3	20.4
		75	0	20.1	20.1	20.1	1.1	20.4	20.0	20.0	20.1	1.3	20.4
	256QAM	1	0	18.1	18.0	18.1	3.1	18.4	18.0	18.1	18.0	3.3	18.4
		1	37	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	74	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		36	0	18.1	18.1	18.1	3.1	18.4	18.0	18.0	18.0	3.3	18.4
		36	20	18.1	18.1	18.1	3.1	18.4	18.1	18.0	18.1	3.3	18.4
		36	39	18.0	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		75	0	18.0	18.1	18.1	3.1	18.4	18.0	18.0	18.1	3.3	18.4

LTE Band 25 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26090	26365	26640	MPR	Tune-up Limit	26090	26365	26640	MPR	Tune-up Limit
				1855 MHz	1882.5 MHz	1910 MHz			1855 MHz	1882.5 MHz	1910 MHz		
10 MHz	QPSK	1	0	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		1	25	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		1	49	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		25	0	21.0	21.0	20.8	0	21.5	21.3	21.3	21.1	0	21.7
		25	12	21.0	21.0	20.8	0	21.5	21.3	21.3	21.1	0	21.7
		25	25	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
	16QAM	50	0	21.0	20.9	20.8	0	21.5	21.3	21.3	21.1	0	21.7
		1	0	20.9	20.9	20.8	0	21.5	20.9	21.0	20.8	0	21.7
		1	25	20.8	20.9	20.8	0	21.5	20.8	20.9	20.7	0	21.7
		1	49	20.9	21.0	20.7	0	21.5	20.9	21.0	20.7	0	21.7
		25	0	20.9	20.9	20.7	0.1	21.4	20.9	20.9	20.8	0.3	21.4
		25	12	20.9	20.9	20.7	0.1	21.4	20.9	20.9	20.7	0.3	21.4
	64QAM	25	25	20.9	20.8	20.7	0.1	21.4	20.9	20.9	20.7	0.3	21.4
		50	0	20.9	20.8	20.7	0.1	21.4	20.9	20.9	20.7	0.3	21.4
		1	0	20.7	20.6	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	25	20.8	20.7	20.8	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	49	20.8	20.6	20.8	0.1	21.4	20.7	20.8	20.8	0.3	21.4
		25	0	20.1	20.0	20.0	1.1	20.4	20.1	20.1	19.9	1.3	20.4
5 MHz	QPSK	25	12	20.1	20.1	20.1	1.1	20.4	20.1	20.1	20.1	1.3	20.4
		25	25	20.1	20.1	20.1	1.1	20.4	20.1	20.1	20.1	1.3	20.4
		50	0	20.1	20.0	20.1	1.1	20.4	20.1	20.1	20.0	1.3	20.4
	16QAM	1	0	18.0	18.1	18.0	3.1	18.4	18.1	18.0	18.0	3.3	18.4
		1	25	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	49	18.1	18.1	18.0	3.1	18.4	18.0	18.0	18.0	3.3	18.4
	64QAM	25	0	18.1	18.0	18.0	3.1	18.4	18.0	18.1	18.0	3.3	18.4
		25	12	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.0	3.3	18.4
		25	25	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.0	3.3	18.4
	256QAM	50	0	18.1	18.0	18.1	3.1	18.4	18.1	18.0	18.0	3.3	18.4
		1	0	20.9	20.9	20.7	0	21.5	21.2	21.2	21.0	0	21.7
	16QAM	1	12	20.9	20.9	20.8	0	21.5	21.3	21.3	21.2	0	21.7
		1	24	20.9	20.9	20.7	0	21.5	21.2	21.2	21.0	0	21.7
		12	0	21.0	20.9	20.7	0	21.5	21.3	21.2	21.0	0	21.7
		12	7	20.9	20.9	20.8	0	21.5	21.3	21.2	21.1	0	21.7
	64QAM	12	13	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		25	0	20.9	20.9	20.7	0	21.5	21.2	21.2	21.0	0	21.7
	256QAM	1	0	20.9	20.9	20.8	0	21.5	21.0	21.0	20.8	0	21.7
		1	12	20.9	21.0	21.0	0	21.5	21.0	21.1	20.9	0	21.7
		1	24	20.9	20.9	20.8	0	21.5	21.0	20.9	20.8	0	21.7
		12	0	20.9	20.9	20.6	0.1	21.4	20.9	20.9	20.7	0.3	21.4
		12	7	20.9	20.9	20.7	0.1	21.4	20.9	20.9	20.7	0.3	21.4
		12	13	20.9	20.9	20.7	0.1	21.4	20.9	20.9	20.7	0.3	21.4
	64QAM	25	0	20.9	20.8	20.6	0.1	21.4	20.9	20.8	20.6	0.3	21.4
		1	0	20.8	20.8	20.6	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	12	20.8	20.8	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	24	20.7	20.8	20.6	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		12	0	20.1	20.0	20.0	1.1	20.4	20.0	20.0	20.1	1.3	20.4
		12	7	20.1	20.0	19.8	1.1	20.4	20.1	20.0	20.1	1.3	20.4
	256QAM	12	13	20.1	20.1	19.8	1.1	20.4	20.1	20.1	20.1	1.3	20.4
		25	0	20.1	20.0	19.8	1.1	20.4	20.0	20.0	20.1	1.3	20.4
		1	0	18.1	18.1	17.8	3.1	18.4	18.0	18.1	18.1	3.3	18.4
		1	12	18.1	18.1	17.8	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	24	18.1	18.1	17.8	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		12	0	18.1	18.0	18.0	3.1	18.4	18.0	18.0	18.0	3.3	18.4
	256QAM	12	7	18.1	18.0	18.0	3.1	18.4	18.0	18.0	18.1	3.3	18.4
		12	13	18.0	18.1	17.8	3.1	18.4	18.0	18.1	18.1	3.3	18.4
		25	0	18.0	18.0	17.8	3.1	18.4	18.0	18.0	18.1	3.3	18.4

LTE Band 25 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26055	26365	26675	MPR	Tune-up Limit	26055	26365	26675	MPR	Tune-up Limit
				1851.5 MHz	1882.5 MHz	1913.5 MHz			1851.5 MHz	1882.5 MHz	1913.5 MHz		
3 MHz	QPSK	1	0	20.8	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
		1	8	20.9	20.8	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		1	14	20.8	20.8	20.7	0	21.5	21.1	21.1	21.0	0	21.7
		8	0	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		8	4	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
		8	7	20.9	20.9	20.8	0	21.5	21.2	21.2	21.1	0	21.7
	16QAM	15	0	20.9	20.9	20.7	0	21.5	21.2	21.1	21.0	0	21.7
		1	0	20.9	20.9	20.8	0	21.5	20.9	20.9	20.8	0	21.7
		1	8	20.9	21.0	20.8	0	21.5	20.9	21.0	20.8	0	21.7
		1	14	20.8	20.9	20.8	0	21.5	20.9	20.9	20.7	0	21.7
		8	0	20.8	20.8	20.8	0.1	21.4	20.9	20.8	20.8	0.3	21.4
		8	4	20.9	20.8	20.8	0.1	21.4	20.9	20.9	20.8	0.3	21.4
	64QAM	8	7	20.8	20.8	20.8	0.1	21.4	20.9	20.9	20.7	0.3	21.4
		15	0	20.8	20.8	20.7	0.1	21.4	20.9	20.8	20.7	0.3	21.4
		1	0	20.7	20.8	20.8	0.1	21.4	20.8	20.7	20.8	0.3	21.4
		1	8	20.8	20.8	20.8	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	14	20.8	20.8	20.8	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		8	0	20.0	20.1	20.1	1.1	20.4	20.0	20.0	20.0	1.3	20.4
1.4 MHz	QPSK	8	4	20.0	20.1	20.1	1.1	20.4	20.0	20.1	20.0	1.3	20.4
		8	7	20.0	20.1	20.0	1.1	20.4	20.0	20.1	20.0	1.3	20.4
		15	0	20.0	20.1	20.1	1.1	20.4	20.0	19.9	19.9	1.3	20.4
	16QAM	1	0	18.0	18.0	18.0	3.1	18.4	18.1	18.0	18.0	3.3	18.4
		1	8	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	14	18.1	18.1	18.0	3.1	18.4	18.0	18.1	18.1	3.3	18.4
	64QAM	8	0	18.0	18.0	18.0	3.1	18.4	18.1	18.0	17.9	3.3	18.4
		8	4	18.0	18.0	18.0	3.1	18.4	18.1	18.1	18.0	3.3	18.4
		8	7	18.0	18.1	18.1	3.1	18.4	18.1	18.1	18.0	3.3	18.4
	256QAM	15	0	18.0	17.9	18.1	3.1	18.4	18.1	17.9	17.9	3.3	18.4
		1	0	20.8	20.8	20.7	0	21.5	21.2	21.2	21.0	0	21.7
	QPSK	1	3	20.9	20.8	20.7	0	21.5	21.2	21.2	21.1	0	21.7
		1	5	20.8	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
		3	0	20.8	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
		3	1	20.9	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
	16QAM	3	3	20.8	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
		6	0	20.8	20.8	20.7	0	21.5	21.2	21.1	21.0	0	21.7
	64QAM	1	0	20.7	20.9	20.7	0	21.5	21.1	21.1	21.1	0	21.7
		1	3	20.7	20.9	20.7	0	21.5	21.1	21.2	21.1	0	21.7
		1	5	20.8	20.8	20.7	0	21.5	21.0	21.2	21.0	0	21.7
		3	0	20.7	20.7	20.6	0	21.5	21.0	21.0	20.9	0	21.7
	256QAM	3	1	20.8	20.7	20.6	0	21.5	21.0	21.0	20.9	0	21.7
		3	3	20.7	20.7	20.6	0	21.5	21.0	21.0	20.9	0	21.7
	64QAM	6	0	20.5	20.4	20.4	0.1	21.4	20.8	20.8	20.7	0.3	21.4
		1	0	20.7	20.7	20.8	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	3	20.7	20.8	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		1	5	20.7	20.8	20.7	0.1	21.4	20.7	20.8	20.8	0.3	21.4
		3	0	20.7	20.8	20.6	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		3	1	20.7	20.8	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
	256QAM	3	3	20.7	20.8	20.7	0.1	21.4	20.8	20.8	20.8	0.3	21.4
		6	0	19.8	19.8	19.7	1.1	20.4	19.7	19.8	19.7	1.3	20.4
	QPSK	1	0	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	3	18.1	18.1	18.0	3.1	18.4	18.1	18.1	18.1	3.3	18.4
		1	5	18.1	18.1	18.1	3.1	18.4	18.1	18.1	18.0	3.3	18.4
		3	0	18.1	18.0	18.1	3.1	18.4	18.0	18.1	18.1	3.3	18.4
		3	1	18.1	18.1	18.1	3.1	18.4	18.0	18.1	18.1	3.3	18.4
		3	3	18.1	18.1	18.1	3.1	18.4	18.0	18.1	18.1	3.3	18.4
	16QAM	6	0	18.0	18.1	18.1	3.1	18.4	18.1	18.1	18.1	3.3	18.4

LTE Band 25 Measured Results (ANT3)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26140	26365	26590	MPR	Tune-up Limit	26140	26365	26590	MPR	Tune-up Limit
				1860 MHz	1882.5 MHz	1905 MHz			1860 MHz	1882.5 MHz	1905 MHz		
20 MHz	QPSK	1	0	24.3	24.3	24.2	0	24.8	20.3	20.3	20.2	0	20.8
		1	49	24.3	24.4	24.2	0	24.8	20.4	20.4	20.3	0	20.8
		1	99	24.3	24.3	24.2	0	24.8	20.3	20.2	20.1	0	20.8
		50	0	24.1	24.1	23.9	0.3	24.5	20.4	20.4	20.2	0	20.8
		50	24	24.1	24.2	24.0	0.3	24.5	20.5	20.5	20.3	0	20.8
		50	50	24.1	24.0	23.9	0.3	24.5	20.4	20.3	20.2	0	20.8
	16QAM	100	0	24.1	24.1	24.0	0.3	24.5	20.4	20.4	20.3	0	20.8
		1	0	23.8	23.9	23.7	0.3	24.5	19.8	19.8	19.7	0	20.8
		1	49	24.0	24.0	24.0	0.3	24.5	19.9	20.0	19.9	0	20.8
		1	99	23.7	23.8	23.6	0.3	24.5	19.8	19.8	19.7	0	20.8
		50	0	22.9	22.8	22.7	1.3	23.5	19.9	19.8	19.6	0	20.8
		50	24	22.9	22.8	22.8	1.3	23.5	19.9	19.8	19.7	0	20.8
	64QAM	50	50	22.8	22.8	22.7	1.3	23.5	19.8	19.8	19.6	0	20.8
		100	0	22.9	22.8	22.8	1.3	23.5	19.8	19.8	19.7	0	20.8
		1	0	23.1	23.0	23.2	1.3	23.5	19.9	20.0	20.1	0	20.8
		1	49	23.1	23.1	23.3	1.3	23.5	20.1	20.0	20.2	0	20.8
		1	99	23.0	23.1	23.2	1.3	23.5	19.9	20.0	20.1	0	20.8
		50	0	21.9	21.9	22.0	2.3	22.5	19.9	19.8	19.9	0	20.8
	256QAM	50	24	22.0	21.9	22.1	2.3	22.5	19.9	19.9	20.1	0	20.8
		50	50	22.0	22.0	22.1	2.3	22.5	19.9	19.9	20.1	0	20.8
		100	0	22.0	22.0	22.1	2.3	22.5	19.9	19.9	20.1	0	20.8
		1	0	20.1	20.2	20.2	4.3	20.5	19.5	19.6	19.6	0.3	20.5
		1	49	20.1	20.1	20.2	4.3	20.5	19.7	19.6	19.6	0.3	20.5
		1	99	20.2	20.2	20.3	4.3	20.5	19.6	19.7	19.7	0.3	20.5
15 MHz	QPSK	50	0	20.0	19.9	20.0	4.3	20.5	19.4	19.4	19.5	0.3	20.5
		50	24	20.0	19.9	20.1	4.3	20.5	19.5	19.4	19.6	0.3	20.5
		50	50	20.0	20.0	20.1	4.3	20.5	19.4	19.4	19.6	0.3	20.5
		100	0	20.0	20.0	20.1	4.3	20.5	19.4	19.4	19.6	0.3	20.5
	16QAM	1	0	24.1	24.0	23.9	0	24.8	20.2	20.1	20.1	0	20.8
		1	37	24.1	24.0	24.0	0	24.8	20.1	20.1	20.0	0	20.8
		1	74	24.0	23.9	23.9	0	24.8	20.1	20.0	19.9	0	20.8
		36	0	23.8	23.8	23.6	0.3	24.5	20.1	20.2	20.0	0	20.8
		36	20	23.9	23.8	23.6	0.3	24.5	20.2	20.2	20.0	0	20.8
		36	39	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		75	0	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		1	0	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	37	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	74	24.1	23.9	23.9	0.3	24.5	20.2	20.1	20.1	0	20.8
	64QAM	36	0	22.8	22.8	22.7	1.3	23.5	20.2	20.2	20.0	0	20.8
		36	20	22.9	22.8	22.7	1.3	23.5	20.3	20.2	20.0	0	20.8
		36	39	22.9	22.8	22.7	1.3	23.5	20.2	20.1	20.0	0	20.8
		75	0	22.8	22.8	22.7	1.3	23.5	20.3	20.1	20.0	0	20.8
		1	0	23.0	23.0	23.2	1.3	23.5	20.2	20.2	20.1	0	20.8
		1	37	23.1	23.1	23.3	1.3	23.5	20.2	20.2	20.2	0	20.8
	256QAM	1	74	23.1	23.1	23.3	1.3	23.5	20.2	20.2	20.2	0	20.8
		36	0	21.9	21.9	22.0	2.3	22.5	20.1	20.0	20.2	0	20.8
		36	20	22.0	21.9	22.0	2.3	22.5	20.1	20.1	20.2	0	20.8
		36	39	22.0	22.0	22.1	2.3	22.5	20.1	20.1	20.3	0	20.8
		75	0	21.9	22.0	22.1	2.3	22.5	20.1	20.1	20.2	0	20.8
		1	0	19.9	20.0	20.1	4.3	20.5	19.8	19.9	19.9	0.3	20.5
15 MHz	QPSK	1	37	20.0	20.1	20.3	4.3	20.5	19.8	20.0	20.0	0.3	20.5
		1	74	20.0	20.1	20.3	4.3	20.5	19.8	20.0	20.0	0.3	20.5
		36	0	20.0	19.9	20.0	4.3	20.5	19.8	19.7	19.9	0.3	20.5
		36	20	20.0	19.9	20.1	4.3	20.5	19.8	19.8	19.9	0.3	20.5
		36	39	20.0	20.0	20.2	4.3	20.5	19.8	19.9	20.0	0.3	20.5
		75	0	20.0	20.0	20.1	4.3	20.5	19.8	19.8	19.9	0.3	20.5
	16QAM	1	0	24.1	24.0	23.9	0	24.8	20.2	20.1	20.1	0	20.8
		1	37	24.1	24.0	24.0	0	24.8	20.1	20.1	20.0	0	20.8
		1	74	24.0	23.9	23.9	0	24.8	20.1	20.0	19.9	0	20.8
		36	0	23.8	23.8	23.6	0.3	24.5	20.1	20.2	20.0	0	20.8
		36	20	23.9	23.8	23.6	0.3	24.5	20.2	20.2	20.0	0	20.8
		36	39	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		75	0	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		1	0	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	37	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	74	24.1	23.9	23.9	0.3	24.5	20.2	20.1	20.1	0	20.8
	64QAM	36	0	22.8	22.8	22.7	1.3	23.5	20.2	20.2	20.0	0	20.8
		36	20	22.9	22.8	22.7	1.3	23.5	20.3	20.2	20.0	0	20.8
		36	39	22.9	22.8	22.7	1.3	23.5	20.2	20.1	20.0	0	20.8
		75	0	22.8	22.8	22.7	1.3	23.5	20.3	20.1	20.0	0	20.8
		1	0	23.0	23.0	23.2	1.3	23.5	20.2	20.2	20.1	0	20.8
		1	37	23.1	23.1	23.3	1.3	23.5	20.2	20.2	20.2	0	20.8
	256QAM	1	74	23.1	23.1	23.3	1.3	23.5	20.2	20.2	20.2	0	20.8
		36	0	21.9	21.9	22.0	2.3	22.5	20.1	20.0	20.2	0	20.8
		36	20	22.0	21.9	22.0	2.3	22.5	20.1	20.1	20.2	0	20.8
		36	39	22.0	22.0	22.1	2.3	22.5	20.1	20.1	20.3	0	20.8
		75	0	21.9	22.0	22.1	2.3	22.5	20.1	20.1	20.2	0	20.8
		1	0	19.9	20.0	20.1	4.3	20.5	19.8	19.9	19.9	0.3	20.5
15 MHz	QPSK	1	37	20.0	20.1	20.3	4.3	20.5	19.8	20.0	20.0	0.3	20.5
		1	74	20.0	20.1	20.3	4.3	20.5	19.8	20.0	20.0	0.3	20.5
		36	0	20.0	19.9	20.0	4.3	20.5	19.8	19.7	19.9	0.3	20.5
		36	20	20.0	19.9	20.1	4.3	20.5	19.8	19.8	19.9	0.3	20.5
		36	39	20.0	20.0	20.2	4.3	20.5	19.8	19.9	20.0	0.3	20.5
		75	0	20.0	20.0	20.1	4.3	20.5	19.8	19.8	19.9	0.3	20.5
	16QAM	1	0	24.1	24.0	23.9	0	24.8	20.2	20.1	20.1	0	20.8
		1	37	24.1	24.0	24.0	0	24.8	20.1	20.1	20.0	0	20.8
		1	74	24.0	23.9	23.9	0	24.8	20.1	20.0	19.9	0	20.8
		36	0	23.8	23.8	23.6	0.3	24.5	20.1	20.2	20.0	0	20.8
		36	20	23.9	23.8	23.6	0.3	24.5	20.2	20.2	20.0	0	20.8
		36	39	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		75	0	23.8	23.8	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		1	0	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	37	24.1	24.0	24.0	0.3	24.5	20.3	20.2	20.2	0	20.8
		1	74	24.1	23.9	23.9	0.3	24.5	20.2	20.1	20.1	0	20.8
	64QAM	36	0	22.8	22.8	22.7	1.3	23.5	20.2	20.2	20.0	0	

LTE Band 25 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26090	26365	26640	MPR	Tune-up Limit	26090	26365	26640	MPR	Tune-up Limit
				1855 MHz	1882.5 MHz	1910 MHz			1855 MHz	1882.5 MHz	1910 MHz		
10 MHz	QPSK	1	0	24.2	24.1	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		1	25	24.2	24.1	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		1	49	24.1	24.1	24.0	0	24.8	20.0	20.0	19.8	0	20.8
		25	0	24.0	23.9	23.7	0.3	24.5	20.1	20.1	19.9	0	20.8
		25	12	24.0	23.9	23.8	0.3	24.5	20.2	20.1	20.0	0	20.8
		25	25	23.9	23.9	23.8	0.3	24.5	20.1	20.1	19.9	0	20.8
	16QAM	50	0	24.0	23.9	23.7	0.3	24.5	20.2	20.1	19.9	0	20.8
		1	0	24.0	24.0	23.8	0.3	24.5	20.2	20.2	20.0	0	20.8
		1	25	23.9	24.0	23.8	0.3	24.5	20.1	20.1	20.0	0	20.8
		1	49	23.9	24.0	23.8	0.3	24.5	20.1	20.2	20.1	0	20.8
		25	0	23.0	23.0	22.8	1.3	23.5	20.1	20.1	19.9	0	20.8
		25	12	23.0	23.0	22.8	1.3	23.5	20.2	20.1	19.9	0	20.8
	64QAM	25	25	23.0	22.9	22.8	1.3	23.5	20.1	20.1	19.9	0	20.8
		50	0	23.0	22.9	22.7	1.3	23.5	20.1	20.1	19.9	0	20.8
		1	0	23.2	23.1	23.2	1.3	23.5	20.2	20.1	20.1	0	20.8
		1	25	23.3	23.1	23.3	1.3	23.5	20.2	20.1	20.1	0	20.8
		1	49	23.2	23.1	23.2	1.3	23.5	20.2	20.1	20.1	0	20.8
		25	0	22.1	22.0	22.2	2.3	22.5	20.0	20.0	20.1	0	20.8
	256QAM	25	12	22.1	22.0	22.3	2.3	22.5	20.0	20.0	20.2	0	20.8
		25	25	22.1	22.1	22.2	2.3	22.5	20.0	20.0	20.2	0	20.8
		50	0	22.1	22.0	22.2	2.3	22.5	20.0	19.9	20.2	0	20.8
		1	0	20.1	20.1	20.2	4.3	20.5	19.7	19.7	19.8	0.3	20.5
		1	25	20.2	20.1	20.2	4.3	20.5	19.8	19.7	19.8	0.3	20.5
		1	49	20.2	20.1	20.3	4.3	20.5	19.8	19.8	19.8	0.3	20.5
5 MHz	QPSK	25	0	20.1	20.0	20.2	4.3	20.5	19.7	19.7	19.8	0.3	20.5
		25	12	20.1	20.0	20.3	4.3	20.5	19.7	19.7	19.9	0.3	20.5
		25	25	20.1	20.1	20.3	4.3	20.5	19.7	19.7	19.9	0.3	20.5
		50	0	20.1	20.0	20.2	4.3	20.5	19.7	19.6	19.9	0.3	20.5
	16QAM	1	0	24.2	24.2	24.0	0	24.8	20.1	20.1	19.9	0	20.8
		1	12	24.3	24.2	24.1	0	24.8	20.2	20.1	19.9	0	20.8
		1	24	24.2	24.1	24.0	0	24.8	20.1	20.0	19.8	0	20.8
		12	0	23.9	23.9	23.7	0.3	24.5	20.1	20.0	19.9	0	20.8
		12	7	23.9	23.9	23.8	0.3	24.5	20.1	20.0	20.0	0	20.8
		12	13	23.9	23.8	23.7	0.3	24.5	20.1	20.0	19.9	0	20.8
	64QAM	25	0	23.9	23.9	23.8	0.3	24.5	20.1	20.0	19.9	0	20.8
		1	0	24.1	23.9	23.9	0.3	24.5	20.3	20.2	20.1	0	20.8
		1	12	24.1	24.0	24.1	0.3	24.5	20.3	20.3	20.1	0	20.8
		1	24	24.1	23.9	23.9	0.3	24.5	20.3	20.2	20.0	0	20.8
		12	0	22.9	23.0	22.9	1.3	23.5	20.2	20.1	20.1	0	20.8
		12	7	22.9	23.0	22.9	1.3	23.5	20.2	20.1	20.0	0	20.8
	256QAM	12	13	22.9	22.9	22.9	1.3	23.5	20.2	20.1	20.0	0	20.8
		25	0	23.0	22.9	22.8	1.3	23.5	20.1	20.1	20.0	0	20.8
		1	0	23.3	23.1	23.3	1.3	23.5	20.1	20.0	20.0	0	20.8
		1	12	23.2	23.1	23.3	1.3	23.5	20.1	20.0	20.1	0	20.8
		1	24	23.3	23.1	23.2	1.3	23.5	20.2	20.0	20.1	0	20.8
		12	0	22.0	22.0	22.1	2.3	22.5	20.0	20.0	20.1	0	20.8
5 MHz	64QAM	12	7	22.0	22.0	22.1	2.3	22.5	20.0	20.0	20.1	0	20.8
		12	13	22.0	22.0	22.2	2.3	22.5	20.0	20.0	20.2	0	20.8
		25	0	22.0	22.0	22.1	2.3	22.5	20.0	19.9	20.1	0	20.8
	256QAM	1	0	20.2	20.1	20.2	4.3	20.5	19.9	19.7	19.9	0.3	20.5
		1	12	20.2	20.1	20.3	4.3	20.5	19.9	19.8	19.9	0.3	20.5
		1	24	20.2	20.2	20.3	4.3	20.5	19.9	19.8	19.9	0.3	20.5
	256QAM	12	0	20.0	20.0	20.1	4.3	20.5	19.7	19.6	19.8	0.3	20.5
		12	7	20.1	20.0	20.1	4.3	20.5	19.7	19.6	19.8	0.3	20.5
		12	13	20.1	20.0	20.2	4.3	20.5	19.7	19.7	19.9	0.3	20.5
		25	0	20.1	20.0	20.1	4.3	20.5	19.7	19.6	19.8	0.3	20.5

LTE Band 25 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26055	26365	26675	MPR	Tune-up Limit	26055	26365	26675	MPR	Tune-up Limit
				1851.5 MHz	1882.5 MHz	1913.5 MHz			1851.5 MHz	1882.5 MHz	1913.5 MHz		
3 MHz	QPSK	1	0	24.1	24.1	24.0	0	24.8	20.1	19.9	19.8	0	20.8
		1	8	24.2	24.2	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		1	14	24.1	24.0	24.0	0	24.8	20.0	19.9	19.8	0	20.8
		8	0	23.9	23.8	23.7	0.3	24.5	20.1	20.0	19.9	0	20.8
		8	4	23.9	23.9	23.8	0.3	24.5	20.1	20.0	19.9	0	20.8
		8	7	23.9	23.8	23.7	0.3	24.5	20.1	20.0	19.9	0	20.8
	16QAM	15	0	23.9	23.8	23.7	0.3	24.5	20.1	20.0	19.9	0	20.8
		1	0	23.9	24.0	23.8	0.3	24.5	20.1	20.2	20.0	0	20.8
		1	8	24.0	24.0	23.8	0.3	24.5	20.1	20.2	20.0	0	20.8
		1	14	23.9	24.0	23.8	0.3	24.5	20.1	20.1	19.9	0	20.8
		8	0	22.9	22.9	22.8	1.3	23.5	20.1	20.1	20.0	0	20.8
		8	4	23.0	22.9	22.8	1.3	23.5	20.1	20.1	20.0	0	20.8
	64QAM	8	7	23.0	22.9	22.8	1.3	23.5	20.1	20.1	20.0	0	20.8
		15	0	22.9	22.9	22.8	1.3	23.5	20.1	20.0	19.9	0	20.8
		1	0	23.2	23.2	23.2	1.3	23.5	20.1	20.2	20.0	0	20.8
		1	8	23.3	23.3	23.3	1.3	23.5	20.2	20.2	20.0	0	20.8
		1	14	23.1	23.2	23.2	1.3	23.5	20.1	20.2	20.0	0	20.8
		8	0	22.0	21.9	22.1	2.3	22.5	20.0	19.9	20.1	0	20.8
	256QAM	8	4	22.1	22.0	22.1	2.3	22.5	20.0	19.9	20.1	0	20.8
		8	7	22.1	21.9	22.1	2.3	22.5	20.0	19.9	20.1	0	20.8
		15	0	22.0	21.9	22.1	2.3	22.5	20.0	19.9	20.1	0	20.8
		1	0	20.1	20.1	20.1	4.3	20.5	19.8	19.6	19.8	0.3	20.5
		1	8	20.2	20.2	20.3	4.3	20.5	19.9	19.8	19.8	0.3	20.5
		1	14	20.1	20.2	20.2	4.3	20.5	19.8	19.7	19.9	0.3	20.5
1.4 MHz	QPSK	8	0	20.1	20.0	20.1	4.3	20.5	19.7	19.6	19.7	0.3	20.5
		8	4	20.1	20.0	20.1	4.3	20.5	19.7	19.6	19.8	0.3	20.5
		8	7	20.1	20.0	20.1	4.3	20.5	19.7	19.6	19.8	0.3	20.5
		15	0	20.0	20.0	20.1	4.3	20.5	19.7	19.6	19.7	0.3	20.5
	16QAM	1	0	24.2	24.1	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		1	3	24.2	24.1	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		1	5	24.1	24.1	24.0	0	24.8	20.0	19.9	19.9	0	20.8
		3	0	24.1	24.1	24.0	0	24.8	20.0	20.0	19.8	0	20.8
		3	1	24.1	24.1	24.0	0	24.8	20.1	20.0	19.9	0	20.8
		3	3	24.1	24.1	24.0	0	24.8	20.0	20.0	19.9	0	20.8
	64QAM	6	0	23.9	23.8	23.7	0.3	24.5	20.0	20.0	19.8	0	20.8
		1	0	24.0	23.7	23.8	0.3	24.5	20.2	20.0	19.9	0	20.8
		1	3	24.0	23.8	23.8	0.3	24.5	20.2	20.0	20.0	0	20.8
		1	5	24.0	23.8	23.7	0.3	24.5	20.2	20.0	19.9	0	20.8
		3	0	23.8	23.7	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		3	1	23.8	23.7	23.7	0.3	24.5	20.2	20.1	20.0	0	20.8
	256QAM	3	3	23.8	23.7	23.6	0.3	24.5	20.2	20.1	20.0	0	20.8
		6	0	22.9	22.8	22.7	1.3	23.5	20.1	20.0	19.9	0	20.8
		1	0	23.0	23.1	23.3	1.3	23.5	20.0	20.0	20.1	0	20.8
		1	3	23.1	23.2	23.3	1.3	23.5	20.0	20.0	20.1	0	20.8
		1	5	23.0	23.2	23.3	1.3	23.5	20.0	20.1	20.1	0	20.8
		3	0	23.1	23.0	23.2	1.3	23.5	20.0	19.9	20.1	0	20.8
1.4 MHz	64QAM	3	1	23.1	23.0	23.2	1.3	23.5	20.0	20.0	20.2	0	20.8
		3	3	23.1	23.0	23.2	1.3	23.5	20.0	20.0	20.2	0	20.8
		6	0	22.0	22.0	22.2	2.3	22.5	19.9	19.8	20.1	0	20.8
	256QAM	1	0	20.0	20.0	20.2	4.3	20.5	19.6	19.6	19.8	0.3	20.5
		1	3	20.1	20.1	20.3	4.3	20.5	19.7	19.6	19.9	0.3	20.5
		1	5	20.0	20.2	20.2	4.3	20.5	19.7	19.6	19.8	0.3	20.5
	256QAM	3	0	20.0	19.9	20.2	4.3	20.5	19.6	19.5	19.8	0.3	20.5
		3	1	20.0	19.9	20.2	4.3	20.5	19.6	19.6	19.8	0.3	20.5
		3	3	20.0	19.9	20.2	4.3	20.5	19.6	19.6	19.8	0.3	20.5
		6	0	20.1	19.8	20.2	4.3	20.5	19.6	19.5	19.8	0.3	20.5

LTE Band 25 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26140	26365	26590	MPR	Tune-up Limit	26140	26365	26590	MPR	Tune-up Limit
				1860 MHz	1882.5 MHz	1905 MHz			1860 MHz	1882.5 MHz	1905 MHz		
20 MHz	QPSK	1	0	18.5	18.5	18.6	0	19.2	19.5	19.4	19.5	0	19.8
		1	49	18.7	18.7	18.6	0	19.2	19.5	19.6	19.6	0	19.8
		1	99	18.4	18.5	18.6	0	19.2	19.4	19.4	19.5	0	19.8
		50	0	18.6	18.5	18.6	0	19.2	19.5	19.4	19.6	0	19.8
		50	24	18.7	18.7	18.7	0	19.2	19.5	19.6	19.6	0	19.8
		50	50	18.5	18.5	18.7	0	19.2	19.4	19.5	19.6	0	19.8
	16QAM	100	0	18.5	18.7	18.6	0	19.2	19.5	19.6	19.6	0	19.8
		1	0	18.3	18.3	18.4	0	19.2	19.2	19.0	19.2	0	19.8
		1	49	18.5	18.3	18.4	0	19.2	19.3	19.2	19.3	0	19.8
		1	99	18.2	18.4	18.5	0	19.2	19.1	19.0	19.2	0	19.8
		50	0	18.1	18.0	18.1	0	19.2	19.1	19.0	19.2	0	19.8
		50	24	18.1	18.1	18.2	0	19.2	19.2	19.1	19.3	0	19.8
	64QAM	50	50	18.0	18.1	18.2	0	19.2	19.0	19.1	19.2	0	19.8
		100	0	18.0	18.1	18.2	0	19.2	19.0	19.1	19.3	0	19.8
		1	0	18.1	18.2	18.2	0	19.2	19.1	19.1	19.1	0	19.8
		1	49	18.3	18.3	18.3	0	19.2	19.3	19.3	19.2	0	19.8
		1	99	18.2	18.2	18.2	0	19.2	19.2	19.2	19.2	0	19.8
		50	0	18.1	18.1	18.1	0	19.2	19.0	18.9	18.9	0	19.8
	256QAM	50	24	18.1	18.1	18.2	0	19.2	19.0	18.9	19.0	0	19.8
		50	50	18.1	18.1	18.2	0	19.2	19.0	19.0	19.0	0	19.8
		100	0	18.1	18.1	18.2	0	19.2	19.0	18.9	19.0	0	19.8
		1	0	17.4	17.6	17.7	0.8	18.4	17.2	17.3	17.4	1.4	18.4
		1	49	17.5	17.6	17.7	0.8	18.4	17.2	17.3	17.4	1.4	18.4
		1	99	17.6	17.7	17.7	0.8	18.4	17.3	17.4	17.4	1.4	18.4
15 MHz	QPSK	50	0	17.4	17.4	17.5	0.8	18.4	17.2	17.2	17.2	1.4	18.4
		50	24	17.4	17.5	17.6	0.8	18.4	17.2	17.2	17.3	1.4	18.4
		50	50	17.4	17.5	17.5	0.8	18.4	17.2	17.2	17.2	1.4	18.4
		100	0	17.4	17.4	17.5	0.8	18.4	17.2	17.2	17.3	1.4	18.4
	16QAM	1	0	18.3	18.2	18.4	0	19.2	19.3	19.2	19.4	0	19.8
		1	37	18.3	18.3	18.4	0	19.2	19.2	19.2	19.4	0	19.8
		1	74	18.3	18.2	18.4	0	19.2	19.1	19.1	19.4	0	19.8
		36	0	18.4	18.2	18.4	0	19.2	19.3	19.2	19.4	0	19.8
		36	20	18.4	18.3	18.4	0	19.2	19.3	19.3	19.4	0	19.8
		36	39	18.4	18.3	18.4	0	19.2	19.3	19.3	19.5	0	19.8
	64QAM	75	0	18.4	18.3	18.4	0	19.2	19.3	19.2	19.4	0	19.8
		1	0	18.4	18.4	18.4	0	19.2	19.1	19.0	19.1	0	19.8
		1	37	18.3	18.3	18.6	0	19.2	19.1	19.0	19.3	0	19.8
		1	74	18.2	18.2	18.4	0	19.2	19.0	18.9	19.1	0	19.8
		36	0	18.1	18.0	18.2	0	19.2	19.2	19.1	19.3	0	19.8
		36	20	18.2	18.1	18.2	0	19.2	19.2	19.2	19.3	0	19.8
	256QAM	36	39	18.1	18.1	18.3	0	19.2	19.2	19.2	19.4	0	19.8
		75	0	18.1	18.1	18.2	0	19.2	19.2	19.2	19.3	0	19.8
		1	0	18.2	18.2	18.3	0	19.2	19.2	19.3	19.4	0	19.8
		1	37	18.2	18.2	18.3	0	19.2	19.3	19.3	19.3	0	19.8
		1	74	18.2	18.3	18.3	0	19.2	19.2	19.3	19.4	0	19.8
		36	0	18.0	18.0	18.1	0	19.2	19.4	19.4	19.4	0	19.8
15 MHz	64QAM	36	20	18.0	18.0	18.1	0	19.2	19.4	19.4	19.5	0	19.8
		36	39	18.1	18.1	18.2	0	19.2	19.5	19.5	19.4	0	19.8
		75	0	18.1	18.0	18.1	0	19.2	19.4	19.4	19.4	0	19.8
	256QAM	1	0	17.3	17.5	17.6	0.8	18.4	17.1	17.3	17.1	1.4	18.4
		1	37	17.4	17.6	17.7	0.8	18.4	17.2	17.3	17.3	1.4	18.4
		1	74	17.4	17.5	17.6	0.8	18.4	17.1	17.4	17.2	1.4	18.4
	256QAM	36	0	17.4	17.4	17.4	0.8	18.4	17.1	17.1	17.2	1.4	18.4
		36	20	17.4	17.4	17.4	0.8	18.4	17.1	17.2	17.2	1.4	18.4
		36	39	17.4	17.5	17.5	0.8	18.4	17.2	17.3	17.2	1.4	18.4
		75	0	17.4	17.4	17.4	0.8	18.4	17.1	17.1	17.1	1.4	18.4

LTE Band 25 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26090	26365	26640	MPR	Tune-up Limit	26090	26365	26640	MPR	Tune-up Limit
				1855 MHz	1882.5 MHz	1910 MHz			1855 MHz	1882.5 MHz	1910 MHz		
10 MHz	QPSK	1	0	18.2	18.1	18.2	0	19.2	19.2	19.1	19.2	0	19.8
		1	25	18.2	18.1	18.3	0	19.2	19.1	19.2	19.3	0	19.8
		1	49	18.1	18.1	18.3	0	19.2	19.1	19.1	19.3	0	19.8
		25	0	18.2	18.1	18.3	0	19.2	19.2	19.2	19.3	0	19.8
		25	12	18.2	18.2	18.4	0	19.2	19.2	19.2	19.4	0	19.8
		25	25	18.2	18.2	18.3	0	19.2	19.2	19.2	19.4	0	19.8
	16QAM	1	0	18.2	18.2	18.3	0	19.2	19.2	19.2	19.4	0	19.8
		1	25	18.2	18.2	18.3	0	19.2	19.3	19.2	19.4	0	19.8
		1	49	18.2	18.3	18.4	0	19.2	19.3	19.3	19.4	0	19.8
		25	0	18.0	17.9	18.0	0	19.2	19.2	19.1	19.3	0	19.8
		25	12	18.0	18.0	18.1	0	19.2	19.2	19.2	19.4	0	19.8
		25	25	18.0	17.9	18.1	0	19.2	19.2	19.2	19.4	0	19.8
	64QAM	1	0	18.0	17.9	18.1	0	19.2	19.2	19.2	19.4	0	19.8
		1	25	18.0	18.1	18.2	0	19.2	19.3	19.3	19.3	0	19.8
		1	49	18.0	18.1	18.1	0	19.2	19.3	19.3	19.3	0	19.8
		25	0	17.9	17.9	17.9	0	19.2	19.3	19.2	19.2	0	19.8
		25	12	18.0	17.9	18.0	0	19.2	19.3	19.2	19.3	0	19.8
		25	25	17.9	18.0	18.0	0	19.2	19.3	19.3	19.2	0	19.8
	256QAM	1	0	17.5	17.5	17.5	0.8	18.4	17.2	17.3	17.3	1.4	18.4
		1	25	17.6	17.5	17.6	0.8	18.4	17.3	17.4	17.4	1.4	18.4
		1	49	17.6	17.6	17.6	0.8	18.4	17.3	17.4	17.3	1.4	18.4
		25	0	17.5	17.5	17.5	0.8	18.4	17.3	17.2	17.2	1.4	18.4
		25	12	17.5	17.5	17.6	0.8	18.4	17.3	17.3	17.3	1.4	18.4
		25	25	17.5	17.6	17.6	0.8	18.4	17.3	17.3	17.3	1.4	18.4
5 MHz	QPSK	1	0	18.2	18.1	18.3	0	19.2	19.2	19.1	19.1	0	19.8
		1	12	18.2	18.2	18.4	0	19.2	19.2	19.2	19.3	0	19.8
		1	24	18.1	18.1	18.3	0	19.2	19.2	19.1	19.2	0	19.8
		12	0	18.2	18.1	18.3	0	19.2	19.2	19.0	19.2	0	19.8
		12	7	18.2	18.1	18.3	0	19.2	19.2	19.1	19.2	0	19.8
		12	13	18.2	18.1	18.3	0	19.2	19.1	19.1	19.3	0	19.8
	16QAM	25	0	18.2	18.1	18.3	0	19.2	19.2	19.1	19.2	0	19.8
		1	0	18.4	18.2	18.3	0	19.2	19.3	19.2	19.0	0	19.8
		1	12	18.4	18.3	18.4	0	19.2	19.3	19.2	19.3	0	19.8
		1	24	18.4	18.2	18.4	0	19.2	19.2	19.2	19.2	0	19.8
		12	0	18.0	17.9	18.0	0	19.2	19.2	19.0	19.2	0	19.8
		12	7	18.0	18.0	18.0	0	19.2	19.2	19.1	19.2	0	19.8
	64QAM	12	13	17.9	17.9	18.1	0	19.2	19.2	19.1	19.2	0	19.8
		25	0	18.0	17.9	18.1	0	19.2	19.2	19.1	19.2	0	19.8
		1	0	18.0	18.0	18.0	0	19.2	19.2	19.3	19.2	0	19.8
		1	12	18.0	18.0	18.1	0	19.2	19.2	19.3	19.3	0	19.8
		1	24	18.0	17.9	18.0	0	19.2	19.2	19.3	19.2	0	19.8
		12	0	17.9	17.8	17.9	0	19.2	19.2	19.2	19.2	0	19.8
	256QAM	12	7	17.9	17.9	17.9	0	19.2	19.3	19.2	19.2	0	19.8
		12	13	17.9	17.9	17.9	0	19.2	19.2	19.3	19.3	0	19.8
		25	0	17.9	17.9	17.9	0	19.2	19.2	19.2	19.2	0	19.8
		1	0	17.4	17.4	17.3	0.8	18.4	17.3	17.3	17.4	1.4	18.4
		1	12	17.4	17.5	17.4	0.8	18.4	17.3	17.3	17.4	1.4	18.4
		1	24	17.4	17.5	17.4	0.8	18.4	17.3	17.4	17.5	1.4	18.4

LTE Band 25 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26055	26365	26675	MPR	Tune-up Limit	26055	26365	26675	MPR	Tune-up Limit
				1851.5 MHz	1882.5 MHz	1913.5 MHz			1851.5 MHz	1882.5 MHz	1913.5 MHz		
3 MHz	QPSK	1	0	18.1	18.0	18.2	0	19.2	19.0	19.0	19.2	0	19.8
		1	8	18.2	18.1	18.3	0	19.2	19.1	19.1	19.2	0	19.8
		1	14	18.1	18.1	18.2	0	19.2	19.0	19.0	19.2	0	19.8
		8	0	18.1	18.0	18.2	0	19.2	19.1	19.0	19.2	0	19.8
		8	4	18.2	18.1	18.2	0	19.2	19.1	19.1	19.2	0	19.8
		8	7	18.2	18.1	18.3	0	19.2	19.1	19.1	19.2	0	19.8
	16QAM	15	0	18.1	18.1	18.2	0	19.2	19.1	19.1	19.2	0	19.8
		1	0	18.0	17.8	18.1	0	19.2	19.2	19.0	19.3	0	19.8
		1	8	18.0	17.9	18.3	0	19.2	19.3	19.1	19.3	0	19.8
		1	14	18.0	17.8	18.2	0	19.2	19.2	19.0	19.3	0	19.8
		8	0	17.8	17.6	17.8	0	19.2	19.2	19.1	19.3	0	19.8
		8	4	17.8	17.7	17.8	0	19.2	19.2	19.2	19.3	0	19.8
	64QAM	8	7	17.8	17.7	17.8	0	19.2	19.2	19.2	19.3	0	19.8
		15	0	17.7	17.7	17.8	0	19.2	19.1	19.1	19.2	0	19.8
		1	0	17.7	17.8	17.9	0	19.2	19.0	19.3	19.2	0	19.8
		1	8	17.8	17.9	18.0	0	19.2	19.1	19.3	19.3	0	19.8
		1	14	17.7	17.8	17.9	0	19.2	19.1	19.3	19.3	0	19.8
		8	0	17.6	17.6	17.6	0	19.2	19.3	19.2	19.2	0	19.8
	256QAM	8	4	17.7	17.6	17.7	0	19.2	19.3	19.2	19.3	0	19.8
		8	7	17.6	17.6	17.7	0	19.2	19.3	19.2	19.3	0	19.8
		15	0	17.6	17.6	17.7	0	19.2	19.2	19.2	19.3	0	19.8
		1	0	17.3	17.2	17.3	0.8	18.4	17.3	17.3	17.3	1.4	18.4
		1	8	17.4	17.3	17.4	0.8	18.4	17.4	17.4	17.5	1.4	18.4
		1	14	17.3	17.3	17.4	0.8	18.4	17.3	17.3	17.3	1.4	18.4
1.4 MHz	QPSK	8	0	17.2	17.2	17.2	0.8	18.4	17.2	17.2	17.2	1.4	18.4
		8	4	17.2	17.3	17.3	0.8	18.4	17.3	17.2	17.4	1.4	18.4
		8	7	17.2	17.2	17.3	0.8	18.4	17.3	17.2	17.4	1.4	18.4
		15	0	17.2	17.2	17.3	0.8	18.4	17.2	17.2	17.3	1.4	18.4
	16QAM	1	0	18.1	18.1	18.3	0	19.2	18.8	18.8	19.0	0	19.8
		1	3	18.2	18.1	18.3	0	19.2	18.9	18.8	19.0	0	19.8
		1	5	18.2	18.1	18.3	0	19.2	18.9	18.8	19.0	0	19.8
		3	0	18.1	18.1	18.3	0	19.2	18.8	18.8	19.0	0	19.8
		3	1	18.1	18.1	18.3	0	19.2	18.8	18.8	19.0	0	19.8
		3	3	18.2	18.1	18.3	0	19.2	18.9	18.8	19.0	0	19.8
	64QAM	6	0	18.1	18.1	18.3	0	19.2	18.8	18.8	19.0	0	19.8
		1	0	18.3	18.2	18.2	0	19.2	19.1	19.1	19.2	0	19.8
		1	3	18.2	18.2	18.3	0	19.2	19.2	19.2	19.2	0	19.8
		1	5	18.2	18.2	18.3	0	19.2	19.2	19.1	19.1	0	19.8
		3	0	18.1	18.1	18.2	0	19.2	19.0	19.0	19.2	0	19.8
		3	1	18.1	18.0	18.2	0	19.2	19.0	19.0	19.2	0	19.8
	256QAM	3	3	18.1	18.1	18.2	0	19.2	19.0	19.0	19.2	0	19.8
		6	0	17.9	17.9	18.1	0	19.2	18.9	18.8	19.0	0	19.8
		1	0	18.1	18.2	18.2	0	19.2	18.9	18.9	18.8	0	19.8
		1	3	18.1	18.2	18.4	0	19.2	18.9	19.0	19.0	0	19.8
		1	5	18.1	18.2	18.2	0	19.2	18.9	19.0	18.9	0	19.8
		3	0	18.2	18.2	18.1	0	19.2	18.8	18.8	18.8	0	19.8
1.4 MHz	64QAM	3	1	18.2	18.2	18.1	0	19.2	18.9	18.8	18.8	0	19.8
		3	3	18.2	18.2	18.2	0	19.2	18.8	18.8	18.9	0	19.8
		6	0	18.1	18.0	18.0	0	19.2	18.7	18.6	18.7	0	19.8
	256QAM	1	0	17.3	17.3	17.2	0.8	18.4	17.4	17.2	17.2	1.4	18.4
		1	3	17.3	17.3	17.4	0.8	18.4	17.4	17.3	17.3	1.4	18.4
		1	5	17.3	17.3	17.3	0.8	18.4	17.4	17.2	17.3	1.4	18.4
		3	0	17.2	17.2	17.2	0.8	18.4	17.3	17.2	17.2	1.4	18.4
		3	1	17.2	17.2	17.2	0.8	18.4	17.3	17.2	17.2	1.4	18.4
		3	3	17.2	17.2	17.3	0.8	18.4	17.3	17.2	17.3	1.4	18.4
		6	0	17.3	17.2	17.1	0.8	18.4	17.3	17.3	17.1	1.4	18.4

LTE Band 26 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26740	26865	26990	MPR	Tune-up Limit	26740	26865	26990	MPR	Tune-up Limit
				819 MHz	831.5 MHz	844 MHz			819 MHz	831.5 MHz	844 MHz		
10 MHz	QPSK	1	0	25.2	25.1	25.3	0	25.7	24.3	24.2	24.3	0	24.5
		1	25	25.2	25.4	25.3	0	25.7	24.3	24.3	24.3	0	24.5
		1	49	25.1	25.2	25.3	0	25.7	24.2	24.2	24.2	0	24.5
		25	0	24.2	24.2	24.3	1	24.7	24.2	24.2	24.2	0	24.5
		25	12	24.2	24.3	24.3	1	24.7	24.3	24.3	24.3	0	24.5
	16QAM	25	25	24.2	24.3	24.2	1	24.7	24.3	24.3	24.3	0	24.5
		50	0	24.2	24.3	24.3	1	24.7	24.3	24.3	24.2	0	24.5
		1	0	24.3	24.4	24.3	1	24.7	24.1	24.2	24.2	0	24.5
		1	25	24.2	24.4	24.4	1	24.7	24.2	24.1	24.1	0	24.5
		1	49	24.3	24.4	24.4	1	24.7	24.1	24.1	24.1	0	24.5
	64QAM	25	0	23.0	23.0	23.1	2	23.7	23.4	23.3	23.3	0.8	23.7
		25	12	23.0	23.1	23.1	2	23.7	23.4	23.4	23.3	0.8	23.7
		25	25	23.0	23.0	23.1	2	23.7	23.4	23.3	23.4	0.8	23.7
		50	0	23.0	23.1	23.1	2	23.7	23.4	23.4	23.3	0.8	23.7
		1	0	23.3	23.1	23.2	2	23.7	23.4	23.4	23.4	0.8	23.7
	256QAM	1	25	23.3	23.1	23.3	2	23.7	23.4	23.4	23.5	0.8	23.7
		1	49	23.2	23.1	23.3	2	23.7	23.4	23.3	23.5	0.8	23.7
		25	0	22.1	22.0	22.1	3	22.7	22.2	22.1	22.2	1.8	22.7
		25	12	22.2	22.1	22.1	3	22.7	22.3	22.2	22.2	1.8	22.7
		25	25	22.1	22.1	22.1	3	22.7	22.3	22.2	22.3	1.8	22.7
5 MHz	QPSK	50	0	22.2	22.1	22.1	3	22.7	22.3	22.2	22.2	1.8	22.7
		1	0	20.2	20.1	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		1	25	20.2	20.2	20.3	5	20.7	20.3	20.3	20.3	3.8	20.7
		1	49	20.2	20.1	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		25	0	20.1	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7
	16QAM	25	12	20.2	20.1	20.1	5	20.7	20.3	20.2	20.2	3.8	20.7
		25	25	20.1	20.1	20.2	5	20.7	20.2	20.2	20.3	3.8	20.7
		50	0	20.2	20.1	20.1	5	20.7	20.3	20.2	20.2	3.8	20.7
	64QAM	1	0	20.2	20.1	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		1	25	20.2	20.2	20.3	5	20.7	20.3	20.3	20.3	3.8	20.7
		1	49	20.2	20.1	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		25	0	20.1	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7
		25	12	20.2	20.1	20.1	5	20.7	20.3	20.2	20.2	3.8	20.7
	256QAM	25	25	20.1	20.1	20.2	5	20.7	20.2	20.2	20.3	3.8	20.7
		50	0	20.2	20.1	20.1	5	20.7	20.3	20.2	20.2	3.8	20.7
	QPSK	1	0	24.9	24.8	25.0	0	25.7	24.2	24.0	24.1	0	24.5
		1	12	25.0	24.9	25.1	0	25.7	24.2	24.1	24.1	0	24.5
		1	24	24.9	24.8	25.0	0	25.7	24.1	24.0	24.0	0	24.5
		12	0	24.0	23.8	24.0	1	24.7	24.1	24.1	24.1	0	24.5
		12	7	24.0	23.9	24.1	1	24.7	24.1	24.1	24.1	0	24.5
	16QAM	12	13	23.9	23.9	24.1	1	24.7	24.1	24.1	24.0	0	24.5
		25	0	24.0	23.9	24.0	1	24.7	24.1	24.1	24.1	0	24.5
		1	0	24.4	24.2	24.2	1	24.7	24.2	24.1	24.1	0	24.5
		1	12	24.5	24.3	24.2	1	24.7	24.1	24.2	24.2	0	24.5
		1	24	24.3	24.2	24.2	1	24.7	24.1	24.1	24.1	0	24.5
	64QAM	12	0	23.0	22.9	22.9	2	23.7	23.4	23.3	23.3	0.8	23.7
		12	7	23.0	23.0	23.0	2	23.7	23.4	23.4	23.3	0.8	23.7
		12	13	23.0	23.0	23.0	2	23.7	23.4	23.4	23.2	0.8	23.7
		25	0	23.0	22.9	22.9	2	23.7	23.4	23.3	23.3	0.8	23.7
		1	0	23.3	23.2	23.3	2	23.7	23.4	23.3	23.4	0.8	23.7
	256QAM	1	12	23.4	23.3	23.3	2	23.7	23.4	23.3	23.5	0.8	23.7
		1	24	23.3	23.2	23.3	2	23.7	23.3	23.3	23.4	0.8	23.7
		12	0	22.2	22.0	22.1	3	22.7	22.2	22.1	22.2	1.8	22.7
		12	7	22.2	22.1	22.2	3	22.7	22.3	22.2	22.3	1.8	22.7
		12	13	22.2	22.1	22.1	3	22.7	22.2	22.2	22.3	1.8	22.7
	QPSK	25	0	22.2	22.0	22.1	3	22.7	22.3	22.1	22.2	1.8	22.7
		1	0	20.3	20.0	20.2	5	20.7	20.4	20.1	20.4	3.8	20.7
		1	12	20.4	20.1	20.3	5	20.7	20.4	20.3	20.4	3.8	20.7
		1	24	20.3	20.1	20.2	5	20.7	20.4	20.2	20.4	3.8	20.7
		12	0	20.2	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7
	16QAM	12	7	20.2	20.0	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		12	13	20.2	20.0	20.1	5	20.7	20.2	20.1	20.3	3.8	20.7
		25	0	20.2	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7
		1	0	20.2	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7
		1	12	20.2	20.0	20.1	5	20.7	20.2	20.1	20.2	3.8	20.7

LTE Band 26 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26705	26865	27025	MPR	Tune-up Limit	26705	26865	27025	MPR	Tune-up Limit
				815.5 MHz	831.5 MHz	847.5 MHz			815.5 MHz	831.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	25.0	24.9	25.1	0	25.7	24.1	24.0	24.0	0	24.5
		1	8	25.1	25.0	25.1	0	25.7	24.1	24.1	24.1	0	24.5
		1	14	25.0	24.9	25.0	0	25.7	24.1	24.0	24.0	0	24.5
		8	0	24.1	24.0	24.1	1	24.7	24.1	24.1	24.1	0	24.5
		8	4	24.1	24.0	24.1	1	24.7	24.1	24.1	24.1	0	24.5
		8	7	24.1	24.0	24.1	1	24.7	24.1	24.1	24.0	0	24.5
	16QAM	15	0	24.0	24.0	24.1	1	24.7	24.1	24.1	24.0	0	24.5
		1	0	24.3	24.3	24.3	1	24.7	24.1	24.1	24.1	0	24.5
		1	8	24.4	24.4	24.4	1	24.7	24.2	24.2	24.1	0	24.5
		1	14	24.3	24.3	24.3	1	24.7	24.1	24.1	24.2	0	24.5
		8	0	23.1	23.1	23.1	2	23.7	23.5	23.4	23.4	0.8	23.7
		8	4	23.2	23.1	23.2	2	23.7	23.5	23.4	23.4	0.8	23.7
	64QAM	8	7	23.2	23.1	23.2	2	23.7	23.5	23.4	23.3	0.8	23.7
		15	0	23.1	23.0	23.1	2	23.7	23.5	23.3	23.3	0.8	23.7
		1	0	23.4	23.1	23.2	2	23.7	23.3	23.2	23.5	0.8	23.7
		1	8	23.4	23.2	23.3	2	23.7	23.4	23.3	23.5	0.8	23.7
		1	14	23.3	23.1	23.2	2	23.7	23.4	23.2	23.4	0.8	23.7
		8	0	22.2	22.1	22.2	3	22.7	22.3	22.2	22.3	1.8	22.7
	256QAM	8	4	22.3	22.1	22.2	3	22.7	22.3	22.2	22.4	1.8	22.7
		8	7	22.2	22.1	22.2	3	22.7	22.3	22.2	22.3	1.8	22.7
		15	0	22.2	22.0	22.1	3	22.7	22.2	22.2	22.3	1.8	22.7
		1	0	20.2	20.0	20.2	5	20.7	20.2	20.1	20.3	3.8	20.7
		1	8	20.3	20.2	20.3	5	20.7	20.3	20.3	20.4	3.8	20.7
		1	14	20.2	20.1	20.2	5	20.7	20.2	20.2	20.3	3.8	20.7
1.4 MHz	QPSK	8	0	20.2	20.0	20.1	5	20.7	20.2	20.2	20.3	3.8	20.7
		8	4	20.2	20.1	20.1	5	20.7	20.2	20.2	20.3	3.8	20.7
		8	7	20.2	20.0	20.1	5	20.7	20.2	20.2	20.3	3.8	20.7
		15	0	20.2	20.0	20.1	5	20.7	20.2	20.1	20.3	3.8	20.7
		1	0	25.0	24.9	25.0	0	25.7	24.1	24.0	23.9	0	24.5
		1	3	25.1	25.0	25.1	0	25.7	24.2	24.1	24.0	0	24.5
	16QAM	1	5	25.0	24.9	25.0	0	25.7	24.1	24.0	23.9	0	24.5
		3	0	25.1	25.0	25.0	0	25.7	24.1	24.1	24.0	0	24.5
		3	1	25.1	25.0	25.0	0	25.7	24.1	24.1	24.0	0	24.5
		3	3	25.1	25.0	25.0	0	25.7	24.2	24.1	24.0	0	24.5
		6	0	24.1	23.9	24.0	1	24.7	24.2	24.1	24.0	0	24.5
		1	0	24.3	24.1	24.3	1	24.7	24.2	24.1	24.1	0	24.5
	64QAM	1	3	24.5	24.2	24.3	1	24.7	24.2	24.1	24.2	0	24.5
		1	5	24.4	24.2	24.3	1	24.7	24.2	24.1	24.2	0	24.5
		3	0	24.3	24.1	24.2	1	24.7	24.0	24.0	24.1	0	24.5
		3	1	24.2	24.1	24.2	1	24.7	24.1	24.0	24.1	0	24.5
		3	3	24.2	24.1	24.2	1	24.7	24.0	24.0	24.1	0	24.5
		6	0	23.1	23.0	23.1	2	23.7	23.5	23.1	23.3	0.8	23.7
	256QAM	1	0	23.2	23.2	23.3	2	23.7	23.3	23.2	23.3	0.8	23.7
		1	3	23.3	23.2	23.3	2	23.7	23.5	23.3	23.3	0.8	23.7
		1	5	23.3	23.2	23.3	2	23.7	23.4	23.2	23.3	0.8	23.7
		3	0	23.2	23.0	23.2	2	23.7	23.3	23.2	23.3	0.8	23.7
		3	1	23.2	23.0	23.2	2	23.7	23.3	23.2	23.3	0.8	23.7
		3	3	23.2	23.0	23.2	2	23.7	23.3	23.2	23.3	0.8	23.7
	256QAM	6	0	22.0	22.0	22.1	3	22.7	22.2	22.1	22.2	1.8	22.7
		1	0	20.2	20.1	20.2	5	20.7	20.2	20.1	20.3	3.8	20.7
		1	3	20.2	20.1	20.2	5	20.7	20.3	20.2	20.3	3.8	20.7
		1	5	20.2	20.1	20.3	5	20.7	20.3	20.1	20.3	3.8	20.7
		3	0	20.2	20.0	20.1	5	20.7	20.3	20.2	20.2	3.8	20.7
		3	1	20.2	20.0	20.1	5	20.7	20.3	20.2	20.3	3.8	20.7
	256QAM	3	3	20.2	20.0	20.1	5	20.7	20.3	20.2	20.3	3.8	20.7
		6	0	20.2	20.1	20.1	5	20.7	20.1	20.0	20.1	3.8	20.7

LTE Band 26 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26740	26865	26990	MPR	Tune-up Limit	26740	26865	26990	MPR	Tune-up Limit
				819 MHz	831.5 MHz	844 MHz			819 MHz	831.5 MHz	844 MHz		
10 MHz	QPSK	1	0	23.7	23.7	23.6	0	24.1	24.1	24.2	24.0	0	24.7
		1	25	23.7	23.7	23.6	0	24.1	24.2	24.2	24.0	0	24.7
		1	49	23.6	23.6	23.5	0	24.1	24.1	24.1	23.9	0	24.7
		25	0	23.1	23.1	23.0	0.4	23.7	23.1	23.1	23.0	1	23.7
		25	12	23.1	23.2	23.0	0.4	23.7	23.1	23.2	23.0	1	23.7
		25	25	23.1	23.2	23.0	0.4	23.7	23.1	23.2	23.0	1	23.7
	16QAM	50	0	23.1	23.1	23.0	0.4	23.7	23.1	23.1	23.0	1	23.7
		1	0	23.0	23.0	23.0	0.4	23.7	23.0	23.0	23.0	1	23.7
		1	25	22.9	22.9	23.0	0.4	23.7	22.9	22.9	23.0	1	23.7
		1	49	23.0	22.9	22.9	0.4	23.7	23.0	22.9	22.9	1	23.7
		25	0	22.1	22.1	22.1	1.4	22.7	22.1	22.1	22.1	2	22.7
		25	12	22.2	22.1	22.1	1.4	22.7	22.2	22.1	22.1	2	22.7
	64QAM	25	25	22.2	22.2	22.0	1.4	22.7	22.2	22.2	22.0	2	22.7
		50	0	22.1	22.1	22.1	1.4	22.7	22.1	22.1	22.1	2	22.7
		1	0	22.1	22.2	22.2	1.4	22.7	22.1	22.2	22.2	2	22.7
		1	25	22.2	22.3	22.2	1.4	22.7	22.2	22.3	22.2	2	22.7
		1	49	22.1	22.3	22.1	1.4	22.7	22.1	22.3	22.1	2	22.7
		25	0	21.0	21.0	21.0	2.4	21.7	21.0	21.0	21.0	3	21.7
5 MHz	256QAM	25	12	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
		25	25	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
		50	0	21.0	21.0	20.9	2.4	21.7	21.0	21.0	20.9	3	21.7
		1	0	19.1	19.1	19.0	4.4	19.7	19.1	19.1	19.0	5	19.7
		1	25	19.2	19.2	19.1	4.4	19.7	19.2	19.2	19.1	5	19.7
		1	49	19.2	19.2	19.0	4.4	19.7	19.2	19.2	19.0	5	19.7
	QPSK	25	0	19.0	19.1	19.0	4.4	19.7	19.0	19.1	19.0	5	19.7
		25	12	19.1	19.1	18.9	4.4	19.7	19.1	19.1	18.9	5	19.7
		25	25	19.1	19.1	19.0	4.4	19.7	19.1	19.1	19.0	5	19.7
		50	0	19.1	19.1	19.0	4.4	19.7	19.1	19.1	19.0	5	19.7
		1	0	23.7	23.7	23.6	0	24.1	24.0	24.1	24.0	0	24.7
		1	12	23.7	23.7	23.6	0	24.1	24.1	24.2	24.1	0	24.7
	16QAM	1	24	23.7	23.7	23.5	0	24.1	24.1	24.1	23.9	0	24.7
		12	0	23.0	23.1	23.0	0.4	23.7	23.0	23.1	23.0	1	23.7
		12	7	23.1	23.2	23.0	0.4	23.7	23.1	23.2	23.0	1	23.7
		12	13	23.1	23.1	23.0	0.4	23.7	23.1	23.1	23.0	1	23.7
		25	0	23.1	23.1	23.0	0.4	23.7	23.1	23.1	23.0	1	23.7
		1	0	23.0	23.0	22.9	0.4	23.7	23.0	23.0	22.9	1	23.7
	64QAM	1	12	23.0	23.0	23.0	0.4	23.7	23.0	23.0	23.0	1	23.7
		1	24	23.0	23.0	23.0	0.4	23.7	23.0	23.0	23.0	1	23.7
		12	0	22.0	22.0	22.0	1.4	22.7	22.0	22.0	22.0	2	22.7
		12	7	22.1	22.1	22.1	1.4	22.7	22.1	22.1	22.1	2	22.7
		12	13	22.1	22.1	22.0	1.4	22.7	22.1	22.1	22.0	2	22.7
		25	0	22.1	22.1	22.0	1.4	22.7	22.1	22.1	22.0	2	22.7
	256QAM	1	0	22.1	22.1	22.1	1.4	22.7	22.1	22.1	22.1	2	22.7
		1	12	22.2	22.1	22.1	1.4	22.7	22.2	22.1	22.1	2	22.7
		1	24	22.1	22.1	22.1	1.4	22.7	22.1	22.1	22.1	2	22.7
		12	0	20.9	21.0	20.9	2.4	21.7	20.9	21.0	20.9	3	21.7
		12	7	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
		12	13	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
	QPSK	25	0	21.0	21.1	20.9	2.4	21.7	21.0	21.1	20.9	3	21.7
		1	0	19.1	19.1	19.2	4.4	19.7	19.1	19.1	19.2	5	19.7
		1	12	19.2	19.2	19.2	4.4	19.7	19.2	19.2	19.2	5	19.7
		1	24	19.1	19.1	19.2	4.4	19.7	19.1	19.1	19.2	5	19.7
		12	0	18.9	19.0	18.9	4.4	19.7	18.9	19.0	18.9	5	19.7
		12	7	19.1	19.2	19.0	4.4	19.7	19.1	19.2	19.0	5	19.7
	16QAM	12	13	19.0	19.1	19.0	4.4	19.7	19.0	19.1	19.0	5	19.7
		25	0	19.0	19.1	18.9	4.4	19.7	19.0	19.1	18.9	5	19.7

LTE Band 26 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				26705	26865	27025	MPR	Tune-up Limit	26705	26865	27025	MPR	Tune-up Limit
				815.5 MHz	831.5 MHz	847.5 MHz			815.5 MHz	831.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.6	23.6	23.5	0	24.1	24.0	24.0	23.9	0	24.7
		1	8	23.7	23.7	23.6	0	24.1	24.1	24.1	24.0	0	24.7
		1	14	23.6	23.6	23.4	0	24.1	23.9	24.0	23.9	0	24.7
		8	0	23.0	23.1	23.0	0.4	23.7	23.0	23.1	23.0	1	23.7
		8	4	23.1	23.2	23.0	0.4	23.7	23.1	23.2	23.0	1	23.7
		8	7	23.1	23.2	23.0	0.4	23.7	23.1	23.2	23.0	1	23.7
	16QAM	15	0	23.1	23.1	22.9	0.4	23.7	23.1	23.1	22.9	1	23.7
		1	0	23.0	23.0	22.9	0.4	23.7	23.0	23.0	22.9	1	23.7
		1	8	23.0	23.0	23.0	0.4	23.7	23.0	23.0	23.0	1	23.7
		1	14	22.9	23.0	22.9	0.4	23.7	22.9	23.0	22.9	1	23.7
		8	0	22.0	22.1	22.1	1.4	22.7	22.0	22.1	22.1	2	22.7
		8	4	22.1	22.2	22.1	1.4	22.7	22.1	22.2	22.1	2	22.7
	64QAM	8	7	22.1	22.2	22.1	1.4	22.7	22.1	22.2	22.1	2	22.7
		15	0	22.1	22.2	22.0	1.4	22.7	22.1	22.2	22.0	2	22.7
		1	0	22.0	22.2	22.1	1.4	22.7	22.0	22.2	22.1	2	22.7
		1	8	22.2	22.4	22.2	1.4	22.7	22.2	22.4	22.2	2	22.7
		1	14	22.1	22.2	22.0	1.4	22.7	22.1	22.2	22.0	2	22.7
		8	0	20.9	21.0	20.9	2.4	21.7	20.9	21.0	20.9	3	21.7
	256QAM	8	4	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
		8	7	21.0	21.1	21.0	2.4	21.7	21.0	21.1	21.0	3	21.7
		15	0	21.0	21.0	20.9	2.4	21.7	21.0	21.0	20.9	3	21.7
		1	0	19.0	19.1	19.0	4.4	19.7	19.0	19.1	19.0	5	19.7
		1	8	19.2	19.3	19.1	4.4	19.7	19.2	19.3	19.1	5	19.7
		1	14	19.1	19.1	19.0	4.4	19.7	19.1	19.1	19.0	5	19.7
1.4 MHz	QPSK	8	0	18.9	19.0	18.9	4.4	19.7	18.9	19.0	18.9	5	19.7
		8	4	19.0	19.1	19.0	4.4	19.7	19.0	19.1	19.0	5	19.7
		8	7	19.0	19.1	19.0	4.4	19.7	19.0	19.1	19.0	5	19.7
		15	0	19.0	19.0	18.9	4.4	19.7	19.0	19.0	18.9	5	19.7
	16QAM	1	0	23.3	23.2	23.2	0	24.1	24.0	24.0	23.9	0	24.7
		1	3	23.3	23.3	23.2	0	24.1	24.0	24.1	23.9	0	24.7
		1	5	23.2	23.3	23.1	0	24.1	24.0	24.1	23.9	0	24.7
		3	0	23.3	23.3	23.2	0	24.1	24.0	24.1	23.9	0	24.7
		3	1	23.2	23.3	23.2	0	24.1	24.0	24.1	23.9	0	24.7
		3	3	23.2	23.3	23.2	0	24.1	24.0	24.1	23.9	0	24.7
	64QAM	6	0	22.7	22.7	22.6	0.4	23.7	22.7	22.7	22.6	1	23.7
		1	0	23.0	22.9	22.9	0.4	23.7	23.0	22.9	22.9	1	23.7
		1	3	22.9	23.0	22.9	0.4	23.7	22.9	23.0	22.9	1	23.7
		1	5	22.9	22.9	22.9	0.4	23.7	22.9	22.9	22.9	1	23.7
		3	0	22.8	22.9	22.7	0.4	23.7	22.8	22.9	22.7	1	23.7
		3	1	22.8	22.9	22.7	0.4	23.7	22.8	22.9	22.7	1	23.7
	256QAM	3	3	22.8	22.9	22.7	0.4	23.7	22.8	22.9	22.7	1	23.7
		6	0	21.7	21.8	21.6	1.4	22.7	21.7	21.8	21.6	2	22.7
		1	0	21.7	21.8	21.7	1.4	22.7	21.7	21.8	21.7	2	22.7
		1	3	21.8	21.9	21.7	1.4	22.7	21.8	21.9	21.7	2	22.7
		1	5	21.8	21.8	21.7	1.4	22.7	21.8	21.8	21.7	2	22.7
		3	0	21.6	21.8	21.7	1.4	22.7	21.6	21.8	21.7	2	22.7
1.4 MHz	64QAM	3	1	21.7	21.8	21.8	1.4	22.7	21.7	21.8	21.8	2	22.7
		3	3	21.7	21.8	21.7	1.4	22.7	21.7	21.8	21.7	2	22.7
		6	0	20.5	20.7	20.7	2.4	21.7	20.5	20.7	20.7	3	21.7
	256QAM	1	0	18.6	18.7	18.8	4.4	19.7	18.6	18.7	18.8	5	19.7
		1	3	18.7	18.8	18.7	4.4	19.7	18.7	18.8	18.7	5	19.7
		1	5	18.7	18.7	18.8	4.4	19.7	18.7	18.7	18.8	5	19.7
	256QAM	3	0	18.5	18.7	18.6	4.4	19.7	18.5	18.7	18.6	5	19.7
		3	1	18.6	18.7	18.6	4.4	19.7	18.6	18.7	18.6	5	19.7
		3	3	18.6	18.7	18.6	4.4	19.7	18.6	18.7	18.6	5	19.7
		6	0	18.7	18.8	18.7	4.4	19.7	18.7	18.8	18.7	5	19.7

LTE Band 30 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	25.3		0	25.6	19.8		0	20.2
		1	25	25.3		0	25.6	19.8		0	20.2
		1	49	25.3		0	25.6	19.8		0	20.2
		25	0	24.3		0.9	24.7	19.8		0	20.2
		25	12	24.5		0.9	24.7	19.8		0	20.2
		25	25	24.4		0.9	24.7	19.8		0	20.2
	16QAM	50	0	24.4		0.9	24.7	19.8		0	20.2
		1	0	24.5		0.9	24.7	19.7		0	20.2
		1	25	24.5		0.9	24.7	19.7		0	20.2
		1	49	24.5		0.9	24.7	19.7		0	20.2
		25	0	23.2		1.9	23.7	19.6		0	20.2
		25	12	23.3		1.9	23.7	19.6		0	20.2
	64QAM	25	25	23.2		1.9	23.7	19.6		0	20.2
		50	0	23.2		1.9	23.7	19.6		0	20.2
		1	0	23.3		1.9	23.7	19.6		0	20.2
		1	25	23.4		1.9	23.7	19.6		0	20.2
		1	49	23.3		1.9	23.7	19.6		0	20.2
		25	0	22.1		2.9	22.7	19.6		0	20.2
	256QAM	25	12	22.2		2.9	22.7	19.7		0	20.2
		25	25	22.2		2.9	22.7	19.7		0	20.2
		50	0	22.2		2.9	22.7	19.7		0	20.2
		1	0	20.2		4.9	20.7	19.7		0	20.2
		1	25	20.4		4.9	20.7	19.6		0	20.2
		1	49	20.3		4.9	20.7	19.7		0	20.2
		25	0	20.1		4.9	20.7	19.6		0	20.2
		25	12	20.2		4.9	20.7	19.7		0	20.2
		25	25	20.2		4.9	20.7	19.6		0	20.2
		50	0	20.2		4.9	20.7	19.6		0	20.2
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	25.1		0	25.6	19.5		0	20.2
		1	12	25.1		0	25.6	19.7		0	20.2
		1	24	25.1		0	25.6	19.6		0	20.2
		12	0	24.1		0.9	24.7	19.6		0	20.2
		12	7	24.2		0.9	24.7	19.6		0	20.2
		12	13	24.1		0.9	24.7	19.6		0	20.2
	16QAM	25	0	24.1		0.9	24.7	19.6		0	20.2
		1	0	24.5		0.9	24.7	19.7		0	20.2
		1	12	24.5		0.9	24.7	19.8		0	20.2
		1	24	24.5		0.9	24.7	19.7		0	20.2
		12	0	23.0		1.9	23.7	19.7		0	20.2
		12	7	23.1		1.9	23.7	19.7		0	20.2
	64QAM	12	13	23.1		1.9	23.7	19.7		0	20.2
		25	0	23.2		1.9	23.7	19.6		0	20.2
		1	0	23.4		1.9	23.7	19.7		0	20.2
		1	12	23.4		1.9	23.7	19.7		0	20.2
		1	24	23.4		1.9	23.7	19.7		0	20.2
		12	0	22.2		2.9	22.7	19.6		0	20.2
	256QAM	12	7	22.3		2.9	22.7	19.6		0	20.2
		12	13	22.2		2.9	22.7	19.6		0	20.2
		25	0	22.2		2.9	22.7	19.6		0	20.2
		1	0	20.2		4.9	20.7	19.7		0	20.2
		1	12	20.4		4.9	20.7	19.7		0	20.2
		1	24	20.3		4.9	20.7	19.7		0	20.2
		12	0	20.2		4.9	20.7	19.5		0	20.2
		12	7	20.3		4.9	20.7	19.6		0	20.2
		12	13	20.2		4.9	20.7	19.6		0	20.2
		25	0	20.2		4.9	20.7	19.5		0	20.2

LTE Band 30 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	19.9		0	20.5	20.7		0	21
		1	25	19.9		0	20.5	20.8		0	21
		1	49	19.8		0	20.5	20.7		0	21
		25	0	19.9		0	20.5	20.7		0	21
		25	12	19.9		0	20.5	20.8		0	21
		25	25	19.9		0	20.5	20.7		0	21
	16QAM	50	0	19.9		0	20.5	20.7		0	21
		1	0	19.9		0	20.5	20.6		0	21
		1	25	19.9		0	20.5	20.6		0	21
		1	49	19.8		0	20.5	20.6		0	21
		25	0	19.9		0	20.5	20.4		0	21
		25	12	19.9		0	20.5	20.4		0	21
	64QAM	25	25	19.9		0	20.5	20.4		0	21
		50	0	19.9		0	20.5	20.4		0	21
		1	0	19.8		0	20.5	20.6		0	21
		1	25	19.8		0	20.5	20.6		0	21
		1	49	19.8		0	20.5	20.6		0	21
		25	0	20.0		0	20.5	19.8		0.3	20.7
	256QAM	25	12	20.0		0	20.5	19.8		0.3	20.7
		25	25	19.9		0	20.5	19.8		0.3	20.7
		50	0	19.9		0	20.5	19.8		0.3	20.7
		1	0	18.2		1.8	18.7	17.9		2.3	18.7
		1	25	18.3		1.8	18.7	17.9		2.3	18.7
		1	49	18.2		1.8	18.7	17.8		2.3	18.7
		25	0	18.1		1.8	18.7	17.8		2.3	18.7
		25	12	18.1		1.8	18.7	17.8		2.3	18.7
		25	25	18.1		1.8	18.7	17.8		2.3	18.7
		50	0	18.1		1.8	18.7	17.8		2.3	18.7
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	19.9		0	20.5	20.7		0	21
		1	12	20.0		0	20.5	20.8		0	21
		1	24	19.8		0	20.5	20.6		0	21
		12	0	19.9		0	20.5	20.7		0	21
		12	7	19.9		0	20.5	20.7		0	21
		12	13	19.9		0	20.5	20.7		0	21
	16QAM	25	0	19.9		0	20.5	20.7		0	21
		1	0	19.9		0	20.5	20.6		0	21
		1	12	20.0		0	20.5	20.7		0	21
		1	24	19.9		0	20.5	20.5		0	21
		12	0	19.9		0	20.5	20.4		0	21
		12	7	20.0		0	20.5	20.5		0	21
	64QAM	12	13	20.0		0	20.5	20.4		0	21
		25	0	19.9		0	20.5	20.4		0	21
		1	0	20.0		0	20.5	20.6		0	21
		1	12	20.0		0	20.5	20.6		0	21
		1	24	19.9		0	20.5	20.6		0	21
		12	0	19.9		0	20.5	19.8		0.3	20.7
	256QAM	12	7	19.9		0	20.5	19.8		0.3	20.7
		12	13	19.9		0	20.5	19.8		0.3	20.7
		25	0	19.9		0	20.5	19.8		0.3	20.7
		1	0	18.2		1.8	18.7	17.9		2.3	18.7
		1	12	18.3		1.8	18.7	18.0		2.3	18.7
		1	24	18.2		1.8	18.7	17.9		2.3	18.7
		12	0	18.1		1.8	18.7	17.8		2.3	18.7
		12	7	18.1		1.8	18.7	17.8		2.3	18.7
		12	13	18.1		1.8	18.7	17.8		2.3	18.7
		25	0	18.1		1.8	18.7	17.8		2.3	18.7

LTE Band 30 Measured Results (ANT3)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	23.1		0	23.6	18.6		0	19.3
		1	25	23.1		0	23.6	18.8		0	19.3
		1	49	23.0		0	23.6	18.5		0	19.3
		25	0	23.0		0	23.6	18.5		0	19.3
		25	12	23.1		0	23.6	18.7		0	19.3
		25	25	23.0		0	23.6	18.5		0	19.3
	16QAM	50	0	23.0		0	23.6	18.6		0	19.3
		1	0	23.1		0	23.6	18.7		0	19.3
		1	25	23.0		0	23.6	18.6		0	19.3
		1	49	23.1		0	23.6	18.6		0	19.3
		25	0	22.5		0.6	23	18.5		0	19.3
		25	12	22.5		0.6	23	18.6		0	19.3
	64QAM	25	25	22.5		0.6	23	18.6		0	19.3
		50	0	22.5		0.6	23	18.6		0	19.3
		1	0	22.8		0.6	23	18.8		0	19.3
		1	25	22.8		0.6	23	18.8		0	19.3
		1	49	22.7		0.6	23	18.8		0	19.3
		25	0	21.5		1.6	22	18.6		0	19.3
	256QAM	25	12	21.5		1.6	22	18.6		0	19.3
		25	25	21.5		1.6	22	18.5		0	19.3
		50	0	21.5		1.6	22	18.6		0	19.3
		1	0	19.7		3.6	20	18.7		0	19.3
		1	25	19.8		3.6	20	18.8		0	19.3
		1	49	19.5		3.6	20	18.6		0	19.3
		25	0	19.5		3.6	20	18.6		0	19.3
		25	12	19.6		3.6	20	18.6		0	19.3
		25	25	19.5		3.6	20	18.5		0	19.3
		50	0	19.5		3.6	20	18.5		0	19.3
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
5 MHz	QPSK	1	0	23.1		0	23.6	18.6		0	19.3
		1	12	23.1		0	23.6	18.7		0	19.3
		1	24	23.0		0	23.6	18.6		0	19.3
		12	0	22.9		0	23.6	18.5		0	19.3
		12	7	23.0		0	23.6	18.6		0	19.3
		12	13	23.0		0	23.6	18.6		0	19.3
	16QAM	25	0	23.0		0	23.6	18.6		0	19.3
		1	0	23.1		0	23.6	18.7		0	19.3
		1	12	23.2		0	23.6	18.8		0	19.3
		1	24	23.1		0	23.6	18.6		0	19.3
		12	0	22.5		0.6	23	18.5		0	19.3
		12	7	22.6		0.6	23	18.6		0	19.3
	64QAM	12	13	22.6		0.6	23	18.6		0	19.3
		25	0	22.5		0.6	23	18.6		0	19.3
		1	0	22.8		0.6	23	18.8		0	19.3
		1	12	22.8		0.6	23	18.8		0	19.3
		1	24	22.6		0.6	23	18.8		0	19.3
		12	0	21.5		1.6	22	18.6		0	19.3
	256QAM	12	7	21.6		1.6	22	18.7		0	19.3
		12	13	21.5		1.6	22	18.6		0	19.3
		25	0	21.5		1.6	22	18.6		0	19.3
		1	0	19.7		3.6	20	18.7		0	19.3
		1	12	19.8		3.6	20	18.8		0	19.3
		1	24	19.5		3.6	20	18.5		0	19.3
		12	0	19.6		3.6	20	18.6		0	19.3
		12	7	19.7		3.6	20	18.7		0	19.3
		12	13	19.5		3.6	20	18.5		0	19.3
		25	0	19.5		3.6	20	18.5		0	19.3

LTE Band 30 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				27710 2310 MHz		MPR	Tune-up Limit	27710 2310 MHz		MPR	Tune-up Limit
10 MHz	QPSK	1	0	18.9		0	19.7	19.7		0	20.1
		1	25	19.0		0	19.7	19.8		0	20.1
		1	49	18.9		0	19.7	19.7		0	20.1
		25	0	18.9		0	19.7	19.7		0	20.1
		25	12	19.1		0	19.7	19.8		0	20.1
		25	25	18.9		0	19.7	19.7		0	20.1
	16QAM	50	0	19.0		0	19.7	19.8		0	20.1
		1	0	18.9		0	19.7	19.7		0	20.1
		1	25	18.9		0	19.7	19.6		0	20.1
		1	49	18.9		0	19.7	19.3		0	20.1
		25	0	18.9		0	19.7	19.6		0	20.1
		25	12	18.9		0	19.7	19.6		0	20.1
	64QAM	25	25	18.9		0	19.7	19.6		0	20.1
		50	0	18.9		0	19.7	19.5		0	20.1
		1	0	18.9		0	19.7	19.6		0	20.1
		1	25	19.0		0	19.7	19.7		0	20.1
		1	49	18.9		0	19.7	19.6		0	20.1
		25	0	19.0		0	19.7	19.6		0	20.1
	256QAM	25	12	19.0		0	19.7	19.6		0	20.1
		25	25	18.9		0	19.7	19.6		0	20.1
		50	0	19.0		0	19.7	19.6		0	20.1
		1	0	17.4		1.5	18.2	17.7		1.9	18.2
		1	25	17.6		1.5	18.2	17.8		1.9	18.2
		1	49	17.4		1.5	18.2	17.6		1.9	18.2
5 MHz	QPSK	25	0	17.4		1.5	18.2	17.6		1.9	18.2
		25	12	17.4		1.5	18.2	17.6		1.9	18.2
		25	25	17.4		1.5	18.2	17.6		1.9	18.2
		50	0	17.4		1.5	18.2	17.5		1.9	18.2
	16QAM	1	0	18.8		0	19.7	19.5		0	20.1
		1	12	19.0		0	19.7	19.6		0	20.1
		1	24	18.8		0	19.7	19.5		0	20.1
		12	0	18.9		0	19.7	19.5		0	20.1
		12	7	18.9		0	19.7	19.5		0	20.1
		12	13	18.9		0	19.7	19.5		0	20.1
	64QAM	25	0	18.8		0	19.7	19.5		0	20.1
		1	0	19.0		0	19.7	19.5		0	20.1
		1	12	19.0		0	19.7	19.7		0	20.1
		1	24	18.9		0	19.7	19.3		0	20.1
		12	0	19.0		0	19.7	19.6		0	20.1
		12	7	19.0		0	19.7	19.6		0	20.1
	256QAM	12	13	18.9		0	19.7	19.6		0	20.1
		25	0	18.9		0	19.7	19.5		0	20.1
		1	0	18.8		0	19.7	19.5		0	20.1
		1	12	18.9		0	19.7	19.5		0	20.1
		1	24	18.8		0	19.7	19.5		0	20.1
		12	0	18.6		0	19.7	19.6		0	20.1
	64QAM	12	7	18.8		0	19.7	19.7		0	20.1
		12	13	18.7		0	19.7	19.6		0	20.1
		25	0	18.6		0	19.7	19.5		0	20.1
	256QAM	1	0	17.4		1.5	18.2	17.5		1.9	18.2
		1	12	17.6		1.5	18.2	17.8		1.9	18.2
		1	24	17.4		1.5	18.2	17.6		1.9	18.2
	256QAM	12	0	17.4		1.5	18.2	17.5		1.9	18.2
		12	7	17.5		1.5	18.2	17.7		1.9	18.2
		12	13	17.5		1.5	18.2	17.7		1.9	18.2
		25	0	17.4		1.5	18.2	17.5		1.9	18.2

LTE Band 41 Power Class 3 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	39750	40185	40620	41055	41490
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
20 MHz	QPSK	1	0	25.1	25.2	25.4	25.3	25.1	0	25.7	22.3	22.4	22.4	22.1	22.2
		1	49	25.3	25.3	25.4	25.2	25.1	0	25.7	22.3	22.4	22.4	22.3	22.2
		1	99	25.3	25.3	25.4	25.3	25.1	0	25.7	22.1	22.4	22.4	22.2	22.1
		50	0	24.2	24.4	24.4	24.3	24.2	1	24.7	22.4	22.3	22.4	22.2	22.3
		50	24	24.2	24.3	24.5	24.3	24.2	1	24.7	22.4	22.4	22.4	22.4	22.3
		50	50	24.2	24.3	24.3	24.2	24.1	1	24.7	22.4	22.2	22.4	22.3	22.2
	16QAM	100	0	24.2	24.3	24.4	24.3	24.2	1	24.7	22.3	22.4	22.4	22.4	22.3
		1	0	24.2	24.3	24.6	24.3	24.1	1	24.7	22.0	22.1	22.3	22.2	22.0
		1	49	24.5	24.6	24.7	24.5	24.3	1	24.7	22.4	22.3	22.4	22.4	22.0
		1	99	24.4	24.4	24.6	24.3	24.3	1	24.7	22.2	22.1	22.2	22.2	22.0
		50	0	23.2	23.4	23.4	23.3	23.2	2	23.7	22.0	22.1	22.2	22.1	22.0
		50	24	23.2	23.3	23.4	23.3	23.2	2	23.7	22.0	22.1	22.2	22.1	22.0
	64QAM	50	50	23.2	23.3	23.4	23.2	23.1	2	23.7	22.0	22.1	22.1	22.0	21.9
		100	0	23.2	23.3	23.4	23.3	23.2	2	23.7	22.0	22.0	22.2	22.1	22.0
		1	0	23.1	23.2	23.3	23.3	23.1	2	23.7	22.0	22.0	22.1	22.0	21.8
		1	49	23.3	23.4	23.3	23.2	23.1	2	23.7	22.0	22.2	22.1	22.2	21.8
		1	99	23.2	23.3	23.3	23.2	23.1	2	23.7	22.0	22.1	22.1	22.0	21.8
		50	0	22.2	22.3	22.4	22.2	22.1	3	22.7	21.9	22.0	22.1	21.9	21.8
	256QAM	50	24	22.2	22.3	22.4	22.2	22.1	3	22.7	21.9	22.0	22.1	21.9	21.8
		50	50	22.2	22.3	22.3	22.1	22.0	3	22.7	21.9	22.0	22.0	21.8	21.8
		100	0	22.2	22.3	22.4	22.2	22.1	3	22.7	21.9	21.9	22.1	21.9	21.8
		1	0	20.2	20.2	20.3	20.3	20.0	5	20.7	19.9	19.9	20.1	20.0	19.8
		1	49	20.3	20.2	20.3	20.2	20.0	5	20.7	20.0	20.0	20.1	19.9	19.7
		1	99	20.2	20.2	20.3	20.2	20.0	5	20.7	20.0	20.0	20.0	19.9	19.7
		50	0	20.2	20.3	20.4	20.2	20.1	5	20.7	19.9	20.0	20.1	19.9	19.8
		50	24	20.2	20.3	20.4	20.3	20.2	5	20.7	19.9	20.0	20.1	20.0	19.9
		50	50	20.2	20.3	20.3	20.2	20.1	5	20.7	19.9	20.0	20.0	19.9	19.8
		100	0	20.2	20.3	20.4	20.2	20.2	5	20.7	19.9	20.0	20.1	19.9	19.7
		1	0	25.2	25.3	25.4	25.2	25.1	0	25.7	22.0	22.0	22.1	22.0	21.9
		1	37	25.2	25.3	25.4	25.2	25.1	0	25.7	22.0	22.0	22.1	21.9	21.9
		1	74	25.2	25.4	25.3	25.2	25.2	0	25.7	22.0	22.1	22.1	21.9	21.9
15 MHz	QPSK	36	0	24.2	24.4	24.4	24.3	24.2	1	24.7	22.0	22.1	22.2	22.0	21.9
		36	20	24.2	24.4	24.4	24.3	24.2	1	24.7	22.1	22.1	22.2	22.0	21.9
		36	39	24.2	24.3	24.3	24.2	24.1	1	24.7	22.0	22.0	22.1	22.0	21.8
		75	0	24.2	24.4	24.4	24.3	24.1	1	24.7	22.0	22.1	22.1	22.0	21.9
		1	0	24.1	24.3	24.4	24.3	24.1	1	24.7	21.9	22.0	22.2	22.0	21.8
		1	37	24.2	24.3	24.4	24.2	24.0	1	24.7	22.0	22.0	22.2	22.0	21.9
	16QAM	1	74	24.2	24.3	24.4	24.3	24.1	1	24.7	21.9	22.0	22.1	22.0	21.9
		36	0	23.2	23.4	23.4	23.3	23.2	2	23.7	22.0	22.1	22.2	22.0	22.0
		36	20	23.3	23.4	23.4	23.3	23.2	2	23.7	22.0	22.1	22.2	22.0	21.9
		36	39	23.2	23.3	23.3	23.2	23.1	2	23.7	22.0	22.1	22.1	22.0	21.9
		75	0	23.2	23.4	23.4	23.3	23.2	2	23.7	21.9	22.1	22.2	22.0	22.0
		1	0	23.1	23.2	23.4	23.2	23.0	2	23.7	21.9	22.0	22.1	21.9	21.8
	64QAM	1	37	23.1	23.2	23.3	23.2	23.0	2	23.7	21.9	22.0	22.1	21.9	21.8
		1	74	23.1	23.2	23.3	23.1	23.0	2	23.7	21.9	22.0	22.1	21.9	21.8
		36	0	22.2	22.3	22.4	22.2	22.1	3	22.7	21.9	22.0	22.0	21.9	21.8
		36	20	22.2	22.3	22.4	22.2	22.1	3	22.7	21.9	22.0	22.0	21.9	21.8
		36	39	22.2	22.3	22.3	22.1	22.0	3	22.7	21.9	22.0	22.0	21.8	21.7
		75	0	22.1	22.3	22.4	22.2	22.1	3	22.7	21.8	22.0	22.1	21.9	21.8
	256QAM	1	0	20.2	20.3	20.3	20.2	20.0	5	20.7	20.0	20.0	20.0	19.9	19.8
		1	37	20.2	20.3	20.3	20.2	20.1	5	20.7	19.8	20.0	19.8	19.9	19.8
		1	74	20.2	20.2	20.2	20.2	20.0	5	20.7	19.8	20.0	19.8	19.8	19.7
		36	0	20.2	20.3	20.4	20.2	20.2	5	20.7	19.9	20.0	20.1	19.9	19.8
		36	20	20.2	20.3	20.4	20.2	20.2	5	20.7	19.9	20.0	20.1	19.9	19.8
		36	39	20.1	20.3	20.3	20.2	20.1	5	20.7	19.9	19.9	20.0	19.8	19.8
		75	0	20.1	20.3	20.4	20.3	20.1	5	20.7	19.8	20.0	20.1	19.9	19.8
		1	0	20.2	20.3	20.4	20.2	20.2	5	20.7	19.9	20.0	20.1	19.9	19.8

LTE Band 41 Power Class 3 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MFR	Tune-up Limit	39750	40185	40620	41055	41490	MFR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	25.3	25.5	25.5	25.3	25.2	0	25.7	22.0	22.2	22.3	22.0	21.9	0	22.4
		1	25	25.4	25.5	25.5	25.3	25.3	0	25.7	22.1	22.2	22.3	22.1	22.0	0	22.4
		1	49	25.3	25.4	25.5	25.3	25.2	0	25.7	22.1	22.2	22.2	22.0	21.9	0	22.4
		25	0	24.4	24.5	24.5	24.4	24.3	1	24.7	22.1	22.3	22.3	22.1	22.0	0	22.4
		25	12	24.4	24.5	24.6	24.4	24.3	1	24.7	22.2	22.3	22.3	22.1	22.1	0	22.4
		25	25	24.3	24.5	24.5	24.4	24.3	1	24.7	22.1	22.2	22.3	22.1	22.0	0	22.4
		50	0	24.3	24.4	24.6	24.4	24.3	1	24.7	22.1	22.2	22.3	22.1	22.1	0	22.4
		1	0	24.4	24.5	24.5	24.4	24.1	1	24.7	22.2	22.1	22.3	22.2	22.0	0	22.4
		1	25	24.5	24.4	24.5	24.5	24.1	1	24.7	22.2	22.2	22.3	22.2	22.0	0	22.4
		1	49	24.5	24.4	24.5	24.4	24.1	1	24.7	22.2	22.2	22.2	22.1	21.9	0	22.4
	16QAM	25	0	23.4	23.5	23.5	23.4	23.3	2	23.7	22.1	22.2	22.3	22.1	22.0	0	22.4
		25	12	23.4	23.5	23.6	23.4	23.3	2	23.7	22.2	22.3	22.3	22.2	22.1	0	22.4
		25	25	23.4	23.5	23.5	23.3	23.3	2	23.7	22.1	22.2	22.2	22.1	22.0	0	22.4
		50	0	23.3	23.4	23.6	23.4	23.3	2	23.7	22.1	22.2	22.3	22.2	22.1	0	22.4
		1	0	23.3	23.3	23.6	23.3	23.1	2	23.7	22.1	22.1	22.3	22.0	22.1	0	22.4
		1	25	23.4	23.4	23.5	23.3	23.2	2	23.7	22.1	22.3	22.3	22.1	22.0	0	22.4
		1	49	23.4	23.3	23.4	23.2	23.0	2	23.7	22.0	22.1	22.3	22.1	22.0	0	22.4
		25	0	22.4	22.4	22.5	22.3	22.2	3	22.7	22.0	22.1	22.2	22.0	21.9	0	22.4
		25	12	22.4	22.5	22.5	22.4	22.3	3	22.7	22.1	22.2	22.2	22.1	22.0	0	22.4
		25	25	22.3	22.4	22.5	22.3	22.2	3	22.7	22.0	22.1	22.2	22.0	21.9	0	22.4
	64QAM	50	0	22.3	22.4	22.5	22.3	22.2	3	22.7	22.0	22.1	22.2	22.1	22.0	0	22.4
		1	0	20.1	20.4	20.5	20.2	20.3	5	20.7	19.9	20.1	20.2	20.0	19.9	1.7	20.7
		1	25	20.3	20.4	20.5	20.3	20.3	5	20.7	20.1	20.1	20.1	19.9	20.0	1.7	20.7
		1	49	20.1	20.3	20.4	20.2	20.2	5	20.7	19.9	20.1	20.1	19.9	19.9	1.7	20.7
		25	0	20.3	20.5	20.5	20.3	20.3	5	20.7	20.0	20.1	20.2	20.0	19.9	1.7	20.7
		25	12	20.4	20.5	20.5	20.4	20.3	5	20.7	20.0	20.2	20.2	20.1	20.0	1.7	20.7
		25	25	20.3	20.4	20.5	20.3	20.3	5	20.7	20.0	20.1	20.2	20.0	19.9	1.7	20.7
		50	0	20.3	20.4	20.5	20.4	20.3	5	20.7	19.9	20.1	20.2	20.0	20.0	1.7	20.7
5 MHz	QPSK	1	0	25.3	25.4	25.5	25.3	25.2	0	25.7	22.0	22.1	22.2	22.0	21.9	0	22.4
		1	12	25.4	25.5	25.6	25.4	25.3	0	25.7	22.2	22.2	22.4	22.2	22.0	0	22.4
		1	24	25.3	25.4	25.5	25.4	25.2	0	25.7	22.1	22.2	22.3	22.1	21.9	0	22.4
		12	0	24.3	24.5	24.6	24.4	24.3	1	24.7	22.1	22.3	22.3	22.1	22.0	0	22.4
		12	7	24.4	24.5	24.6	24.4	24.3	1	24.7	22.2	22.3	22.4	22.2	22.0	0	22.4
		12	13	24.3	24.4	24.6	24.4	24.3	1	24.7	22.1	22.2	22.3	22.1	22.0	0	22.4
		25	0	24.3	24.5	24.6	24.4	24.3	1	24.7	22.0	22.3	22.3	22.1	22.0	0	22.4
	16QAM	1	0	24.4	24.4	24.6	24.4	24.2	1	24.7	22.1	22.2	22.4	22.1	21.9	0	22.4
		1	12	24.6	24.5	24.7	24.5	24.3	1	24.7	22.2	22.3	22.4	22.2	22.0	0	22.4
		1	24	24.4	24.5	24.7	24.4	24.3	1	24.7	22.1	22.2	22.3	22.2	22.0	0	22.4
		12	0	23.3	23.4	23.5	23.4	23.2	2	23.7	22.0	22.3	22.3	22.1	21.9	0	22.4
		12	7	23.4	23.4	23.5	23.5	23.3	2	23.7	22.1	22.3	22.3	22.2	22.0	0	22.4
		12	13	23.3	23.4	23.5	23.5	23.2	2	23.7	22.0	22.2	22.3	22.1	21.9	0	22.4
		25	0	23.3	23.5	23.6	23.4	23.2	2	23.7	22.0	22.2	22.3	22.1	22.0	0	22.4
	64QAM	1	0	23.4	23.5	23.5	23.3	23.2	2	23.7	22.1	22.2	22.1	22.2	22.0	0	22.4
		1	12	23.4	23.5	23.6	23.4	23.3	2	23.7	22.2	22.3	22.3	22.2	22.0	0	22.4
		1	24	23.3	23.5	23.5	23.4	23.3	2	23.7	22.1	22.3	22.2	22.2	22.0	0	22.4
		12	0	22.3	22.4	22.5	22.3	22.2	3	22.7	22.0	22.1	22.2	22.0	21.9	0	22.4
		12	7	22.4	22.5	22.5	22.4	22.3	3	22.7	22.0	22.2	22.2	22.1	21.9	0	22.4
		12	13	22.3	22.4	22.5	22.3	22.2	3	22.7	22.0	22.0	22.2	22.0	21.9	0	22.4
		25	0	22.2	22.4	22.5	22.3	22.2	3	22.7	22.0	22.1	22.2	22.0	21.9	0	22.4
	256QAM	1	0	20.2	20.3	20.4	20.4	20.0	5	20.7	20.0	20.0	20.1	20.0	19.8	1.7	20.7
		1	12	20.4	20.4	20.5	20.4	20.1	5	20.7	20.1	20.1	20.2	20.1	19.9	1.7	20.7
		1	24	20.3	20.4	20.4	20.3	20.1	5	20.7	20.0	20.0	20.1	20.0	19.8	1.7	20.7
		12	0	20.3	20.4	20.5	20.3	20.2	5	20.7	20.0	20.1	20.2	20.0	19.9	1.7	20.7
		12	7	20.3	20.5	20.6	20.4	20.2	5	20.7	20.1	20.2	20.2	20.1	19.9	1.7	20.7
		12	13	20.2	20.4	20.5	20.4	20.2	5	20.7	19.9	20.1	20.2	20.1	19.9	1.7	20.7
		25	0	20.2	20.4	20.5	20.4	20.2	5	20.7	19.9	20.1	20.2	20.0	19.9	1.7	20.7

LTE Band 41 Power Class 3 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	19.8	19.8	19.9	19.9	19.7	0	20.3	20.2	20.1	20.3	20.2	20.1	0	20.8
		1	49	19.8	19.8	19.9	19.9	19.7	0	20.3	20.2	20.1	20.3	20.1	20.1	0	20.8
		1	99	19.8	19.8	19.9	19.9	19.7	0	20.3	20.2	20.1	20.2	20.2	20.1	0	20.8
		50	0	19.9	19.9	19.9	19.9	19.8	0	20.3	20.2	20.2	20.3	20.2	20.2	0	20.8
		50	24	19.9	19.9	19.9	19.9	19.8	0	20.3	20.3	20.1	20.3	20.2	20.2	0	20.8
		50	50	19.8	19.8	19.8	19.9	19.7	0	20.3	20.2	20.1	20.2	20.1	20.1	0	20.8
		100	0	19.8	19.9	19.9	19.8	19.8	0	20.3	20.2	20.1	20.3	20.2	20.2	0	20.8
	16QAM	1	0	19.6	19.7	19.8	19.8	19.6	0	20.3	20.2	20.1	20.3	20.2	20.2	0	20.8
		1	49	19.6	19.9	19.8	19.8	19.4	0	20.3	20.3	20.3	20.4	20.3	20.1	0	20.8
		1	99	19.6	19.7	19.7	19.8	19.5	0	20.3	20.2	20.2	20.3	20.3	20.2	0	20.8
		50	0	19.6	19.6	19.6	19.7	19.6	0	20.3	20.2	20.2	20.3	20.2	20.2	0	20.8
		50	24	19.7	19.7	19.7	19.7	19.6	0	20.3	20.2	20.1	20.3	20.2	20.2	0	20.8
		50	50	19.6	19.6	19.6	19.7	19.5	0	20.3	20.2	20.1	20.1	20.1	20.1	0	20.8
		100	0	19.5	19.7	19.6	19.7	19.6	0	20.3	20.2	20.1	20.3	20.2	20.2	0	20.8
	64QAM	1	0	19.4	19.6	19.5	19.4	19.4	0	20.3	20.2	20.1	20.1	20.1	20.0	0	20.8
		1	49	19.6	19.5	19.4	19.4	19.4	0	20.3	20.3	20.2	20.1	20.1	20.1	0	20.8
		1	99	19.5	19.6	19.4	19.4	19.2	0	20.3	20.1	20.1	20.0	20.1	20.1	0	20.8
		50	0	19.6	19.6	19.5	19.4	19.4	0	20.3	20.2	20.1	20.1	20.0	20.0	0	20.8
		50	24	19.6	19.5	19.6	19.5	19.4	0	20.3	20.3	20.1	20.1	20.0	20.0	0	20.8
		50	50	19.5	19.5	19.4	19.4	19.3	0	20.3	20.2	20.1	20.0	20.0	19.9	0	20.8
		100	0	19.6	19.5	19.5	19.5	19.4	0	20.3	20.2	20.1	20.1	20.0	20.0	0	20.8
	256QAM	1	0	19.8	19.6	19.5	19.5	19.4	0	20.3	19.9	20.0	19.9	19.6	19.7	0.1	20.7
		1	49	19.7	19.6	19.5	19.4	19.2	0	20.3	19.8	20.0	19.8	19.6	19.8	0.1	20.7
		1	99	19.6	19.5	19.4	19.4	19.4	0	20.3	19.8	19.9	19.8	19.5	19.7	0.1	20.7
		50	0	19.6	19.6	19.6	19.4	19.4	0	20.3	19.9	19.9	19.9	19.7	19.7	0.1	20.7
		50	24	19.7	19.5	19.6	19.4	19.4	0	20.3	19.9	19.8	19.9	19.8	19.7	0.1	20.7
		50	50	19.6	19.5	19.5	19.3	19.3	0	20.3	19.9	19.8	19.8	19.7	19.6	0.1	20.7
		100	0	19.6	19.5	19.6	19.4	19.4	0	20.3	19.9	19.8	19.8	19.8	19.7	0.1	20.7
15 MHz	QPSK	1	0	19.6	19.7	19.6	19.7	19.6	0	20.3	20.2	20.2	20.2	20.2	20.2	0	20.8
		1	37	19.6	19.6	19.6	19.6	19.5	0	20.3	20.2	20.1	20.2	20.1	20.1	0	20.8
		1	74	19.5	19.6	19.6	19.6	19.5	0	20.3	20.1	20.1	20.2	20.1	20.1	0	20.8
		36	0	19.6	19.7	19.6	19.7	19.5	0	20.3	20.2	20.2	20.3	20.2	20.2	0	20.8
		36	20	19.6	19.6	19.6	19.7	19.6	0	20.3	20.3	20.1	20.3	20.2	20.2	0	20.8
		36	39	19.5	19.6	19.5	19.6	19.5	0	20.3	20.2	20.1	20.2	20.1	20.1	0	20.8
		75	0	19.6	19.6	19.6	19.7	19.5	0	20.3	20.3	20.1	20.3	20.2	20.2	0	20.8
	16QAM	1	0	19.6	19.6	19.6	19.7	19.6	0	20.3	20.3	20.3	20.2	20.1	20.2	0	20.8
		1	37	19.6	19.6	19.5	19.6	19.5	0	20.3	20.2	20.2	20.2	20.0	20.3	0	20.8
		1	74	19.5	19.5	19.4	19.6	19.4	0	20.3	20.2	20.2	20.1	20.0	20.2	0	20.8
		36	0	19.6	19.7	19.6	19.7	19.6	0	20.3	20.3	20.2	20.3	20.2	20.2	0	20.8
		36	20	19.6	19.6	19.6	19.7	19.6	0	20.3	20.3	20.1	20.2	20.2	20.2	0	20.8
		36	39	19.5	19.6	19.6	19.6	19.5	0	20.3	20.2	20.1	20.2	20.1	20.1	0	20.8
		75	0	19.6	19.6	19.6	19.7	19.6	0	20.3	20.3	20.1	20.3	20.2	20.2	0	20.8
	64QAM	1	0	19.4	19.4	19.5	19.4	19.3	0	20.3	20.1	20.0	20.1	20.0	19.8	0	20.8
		1	37	19.5	19.4	19.5	19.3	19.3	0	20.3	20.2	20.0	20.1	20.0	20.0	0	20.8
		1	74	19.4	19.4	19.4	19.4	19.3	0	20.3	20.2	20.1	20.0	20.1	20.0	0	20.8
		36	0	19.6	19.6	19.5	19.4	19.4	0	20.3	20.3	20.1	20.1	20.0	20.0	0	20.8
		36	20	19.7	19.5	19.5	19.4	19.4	0	20.3	20.3	20.1	20.1	20.0	20.0	0	20.8
		36	39	19.5	19.5	19.4	19.4	19.4	0	20.3	20.2	20.1	20.0	19.9	20.0	0	20.8
		75	0	19.7	19.5	19.5	19.5	19.4	0	20.3	20.3	20.1	20.1	20.0	20.0	0	20.8
	256QAM	1	0	19.5	19.6	19.5	19.3	19.2	0	20.3	19.9	19.8	19.8	19.7	19.5	0.1	20.7
		1	37	19.6	19.5	19.4	19.4	19.3	0	20.3	19.8	20.0	19.7	19.6	19.6	0.1	20.7
		1	74	19.5	19.4	19.4	19.4	19.2	0	20.3	19.8	19.8	19.6	19.6	19.5	0.1	20.7
		36	0	19.7	19.6	19.6	19.4	19.4	0	20.3	19.9	19.9	19.8	19.7	19.7	0.1	20.7
		36	20	19.7	19.5	19.6	19.4	19.4	0	20.3	19.9	19.8	19.8	19.8	19.7	0.1	20.7
		36	39	19.6	19.5	19.5	19.4	19.3	0	20.3	19.9	19.8	19.7	19.7	19.6	0.1	20.7
		75	0	19.7	19.5	19.5	19.4	19.4	0	20.3	19.9	19.8	19.8	19.7	19.7	0.1	20.7

LTE Band 41 Power Class 3 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MFR	Tune-up Limit	39750	40185	40620	41055	41490	MFR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	19.7	19.8	19.7	19.8	19.7	0	20.3	20.3	20.3	20.3	20.3	20.3	0	20.8
		1	25	19.7	19.8	19.8	19.8	19.7	0	20.3	20.4	20.4	20.3	20.3	20.3	0	20.8
		1	49	19.6	19.7	19.6	19.7	19.6	0	20.3	20.3	20.2	20.3	20.2	20.2	0	20.8
		25	0	19.8	19.8	19.7	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		25	12	19.8	19.8	19.8	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		25	25	19.7	19.8	19.7	19.8	19.6	0	20.3	20.3	20.3	20.3	20.3	20.3	0	20.8
		50	0	19.8	19.8	19.8	19.8	19.7	0	20.3	20.4	20.2	20.4	20.3	20.3	0	20.8
		1	0	19.8	19.6	19.6	19.9	19.7	0	20.3	20.4	20.4	20.2	20.1	20.3	0	20.8
	16QAM	1	25	19.8	19.7	19.7	19.9	19.7	0	20.3	20.4	20.4	20.2	20.2	20.3	0	20.8
		1	49	19.7	19.6	19.6	19.7	19.6	0	20.3	20.4	20.3	20.1	20.0	20.2	0	20.8
		25	0	19.8	19.9	19.7	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		25	12	19.8	19.8	19.8	19.9	19.7	0	20.3	20.4	20.3	20.4	20.3	20.4	0	20.8
		25	25	19.7	19.8	19.7	19.8	19.6	0	20.3	20.3	20.3	20.3	20.2	20.3	0	20.8
		50	0	19.8	19.8	19.8	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		1	0	19.7	19.6	19.6	19.5	19.5	0	20.3	20.4	20.2	20.3	20.0	20.0	0	20.8
		1	25	19.7	19.6	19.6	19.7	19.4	0	20.3	20.4	20.3	20.2	20.1	20.1	0	20.8
	64QAM	1	49	19.7	19.5	19.5	19.6	19.3	0	20.3	20.2	20.1	20.1	20.2	19.9	0	20.8
		25	0	19.8	19.7	19.6	19.6	19.5	0	20.3	20.3	20.3	20.2	20.2	20.1	0	20.8
		25	12	19.8	19.6	19.7	19.6	19.6	0	20.3	20.4	20.2	20.3	20.2	20.2	0	20.8
		25	25	19.7	19.6	19.6	19.5	19.5	0	20.3	20.3	20.2	20.2	20.1	20.1	0	20.8
		50	0	19.8	19.6	19.6	19.6	19.6	0	20.3	20.4	20.2	20.3	20.2	20.2	0	20.8
		1	0	19.6	19.7	19.5	19.5	19.5	0	20.3	20.0	19.9	19.9	19.7	19.8	0.1	20.7
		1	25	19.7	19.7	19.6	19.5	19.5	0	20.3	20.0	19.9	19.8	19.8	19.8	0.1	20.7
		1	49	19.6	19.5	19.3	19.4	19.4	0	20.3	19.8	19.8	19.7	19.6	19.7	0.1	20.7
	256QAM	25	0	19.7	19.7	19.6	19.6	19.5	0	20.3	20.1	20.0	19.9	19.8	19.9	0.1	20.7
		25	12	19.8	19.6	19.7	19.6	19.6	0	20.3	20.1	19.9	20.0	19.9	19.9	0.1	20.7
		25	25	19.7	19.6	19.6	19.5	19.5	0	20.3	20.0	19.9	19.9	19.8	19.9	0.1	20.7
		50	0	19.8	19.6	19.6	19.6	19.6	0	20.3	20.1	19.9	19.9	19.9	19.9	0.1	20.7
5 MHz	QPSK	1	0	19.7	19.7	19.7	19.8	19.6	0	20.3	20.4	20.2	20.3	20.2	20.2	0	20.8
		1	12	19.8	19.8	19.8	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
	16QAM	1	24	19.7	19.7	19.7	19.8	19.7	0	20.3	20.3	20.3	20.3	20.3	20.3	0	20.8
		12	0	19.8	19.8	19.7	19.9	19.7	0	20.3	20.4	20.4	20.4	20.3	20.3	0	20.8
		12	7	19.8	19.8	19.7	19.9	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		12	13	19.7	19.8	19.7	19.8	19.7	0	20.3	20.3	20.3	20.3	20.3	20.3	0	20.8
		25	0	19.8	19.8	19.7	19.9	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		1	0	19.8	19.8	19.8	19.7	19.6	0	20.3	20.3	20.2	20.4	20.3	20.3	0	20.8
		1	12	19.8	19.7	19.9	19.8	19.7	0	20.3	20.3	20.3	20.4	20.4	20.3	0	20.8
		1	24	19.7	19.9	19.8	19.8	19.6	0	20.3	20.2	20.3	20.4	20.4	20.3	0	20.8
5 MHz	64QAM	12	0	19.8	19.9	19.7	19.7	19.7	0	20.3	20.2	20.3	20.3	20.3	20.3	0	20.8
		12	7	19.7	19.9	19.8	19.7	19.8	0	20.3	20.3	20.3	20.3	20.3	20.3	0	20.8
		12	13	19.6	19.9	19.7	19.7	19.7	0	20.3	20.2	20.2	20.3	20.3	20.2	0	20.8
		25	0	19.7	19.8	19.8	19.8	19.7	0	20.3	20.4	20.3	20.4	20.3	20.3	0	20.8
		1	0	19.8	19.6	19.6	19.5	19.5	0	20.3	20.4	20.3	20.2	20.2	20.1	0	20.8
		1	12	19.9	19.8	19.7	19.6	19.6	0	20.3	20.4	20.3	20.4	20.3	20.2	0	20.8
		1	24	19.7	19.7	19.6	19.6	19.6	0	20.3	20.3	20.3	20.2	20.3	20.1	0	20.8
		12	0	19.8	19.7	19.6	19.6	19.5	0	20.3	20.3	20.3	20.2	20.2	20.1	0	20.8
	256QAM	12	7	19.8	19.6	19.7	19.6	19.5	0	20.3	20.4	20.2	20.3	20.2	20.1	0	20.8
		12	13	19.7	19.6	19.6	19.6	19.5	0	20.3	20.3	20.2	20.3	20.2	20.1	0	20.8
		25	0	19.8	19.6	19.6	19.6	19.5	0	20.3	20.4	20.2	20.3	20.2	20.1	0	20.8
		1	0	19.6	19.5	19.6	19.5	19.3	0	20.3	20.0	20.0	19.8	19.7	19.8	0.1	20.7
		1	12	19.7	19.6	19.6	19.6	19.4	0	20.3	20.0	20.0	20.0	19.7	20.0	0.1	20.7
		1	24	19.7	19.6	19.5	19.5	19.4	0	20.3	19.9	19.9	19.9	19.7	19.8	0.1	20.7
		12	0	19.7	19.7	19.7	19.5	19.5	0	20.3	20.0	20.0	19.9	19.9	19.8	0.1	20.7
		12	7	19.8	19.6	19.7	19.6	19.6	0	20.3	20.1	19.9	20.0	19.9	19.9	0.1	20.7
		12	13	19.7	19.6	19.7	19.6	19.5	0	20.3	20.0	19.9	20.0	19.8	19.8	0.1	20.7
		25	0	19.7	19.6	19.7	19.6	19.5	0	20.3	20.0	19.9	19.9	19.8	19.8	0.1	20.7

LTE Band 41 Power Class 3 Measured Results (ANT3)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	24.4	25.0	25.0	24.9	24.9	0	25.7	17.5	18.1	18.1	17.9	18.0	0	19.1
		1	49	25.3	25.1	25.3	25.0	25.0	0	25.7	18.2	18.1	18.3	18.0	18.0	0	19.1
		1	99	25.3	25.0	25.0	24.9	24.9	0	25.7	18.1	18.1	18.1	17.9	17.9	0	19.1
		50	0	24.0	24.1	24.0	24.0	23.9	1	24.7	18.1	18.1	18.0	18.0	18.0	0	19.1
		50	24	24.3	24.1	24.4	24.0	23.9	1	24.7	18.3	18.1	18.3	18.1	18.0	0	19.1
		50	50	24.3	24.1	24.0	23.8	23.8	1	24.7	18.2	18.1	18.1	17.9	17.9	0	19.1
	16QAM	100	0	24.2	24.1	24.2	23.9	23.9	1	24.7	18.3	18.1	18.3	18.0	18.0	0	19.1
		1	0	23.4	24.0	23.8	23.8	23.8	1	24.7	17.1	17.8	17.7	17.6	17.7	0	19.1
		1	49	24.3	24.2	24.1	24.1	24.0	1	24.7	18.0	18.0	18.1	17.6	18.0	0	19.1
		1	99	24.3	24.0	23.9	23.8	23.8	1	24.7	18.1	17.8	17.7	17.6	17.7	0	19.1
		50	0	22.8	22.9	22.8	22.7	22.7	2	23.7	17.7	17.8	17.7	17.6	17.6	0	19.1
		50	24	23.0	22.9	22.8	22.7	22.7	2	23.7	17.9	17.8	17.7	17.6	17.6	0	19.1
	64QAM	50	50	23.1	22.9	22.8	22.7	22.6	2	23.7	18.0	17.7	17.6	17.5	17.5	0	19.1
		100	0	22.9	22.9	22.8	22.7	22.7	2	23.7	17.9	17.7	17.6	17.6	17.6	0	19.1
		1	0	22.1	23.3	23.0	22.8	22.9	2	23.7	18.0	18.2	17.9	17.7	17.8	0	19.1
		1	49	23.3	23.2	23.0	22.7	23.0	2	23.7	18.2	18.2	17.9	17.8	17.9	0	19.1
		1	99	23.4	23.3	23.0	22.8	23.0	2	23.7	18.3	18.1	17.9	17.9	17.9	0	19.1
		50	0	21.9	22.3	22.0	21.9	21.9	3	22.7	17.8	18.2	17.9	17.8	17.8	0	19.1
	256QAM	50	24	22.2	22.3	22.1	21.9	21.9	3	22.7	18.1	18.2	18.0	17.8	17.9	0	19.1
		50	50	22.4	22.2	22.0	21.8	21.9	3	22.7	18.3	18.1	17.9	17.7	17.8	0	19.1
		100	0	22.2	22.3	22.1	21.9	21.9	3	22.7	18.1	18.2	18.0	17.8	17.8	0	19.1
		1	0	19.2	20.3	20.0	19.9	19.8	5	20.7	18.1	18.2	18.0	17.8	17.7	0	19.1
		1	49	20.3	20.2	20.0	19.8	19.8	5	20.7	18.2	18.0	17.9	17.8	17.8	0	19.1
		1	99	20.5	20.2	20.0	19.9	19.9	5	20.7	18.0	18.0	17.9	17.8	17.7	0	19.1
		50	0	19.9	20.3	20.0	19.9	19.9	5	20.7	17.9	18.2	18.0	17.8	17.8	0	19.1
		50	24	20.3	20.3	20.1	19.9	19.9	5	20.7	18.2	18.2	18.0	17.8	17.8	0	19.1
		50	50	20.4	20.2	20.0	19.8	19.9	5	20.7	18.3	18.1	17.9	17.7	17.8	0	19.1
		100	0	20.2	20.3	20.0	19.9	19.9	5	20.7	18.1	18.2	18.0	17.8	17.8	0	19.1
15 MHz	QPSK	1	0	24.5	24.9	24.8	24.8	24.7	0	25.7	17.7	18.0	17.8	17.8	17.8	0	19.1
		1	37	25.1	24.9	24.8	24.7	24.7	0	25.7	18.1	18.0	17.8	17.7	17.7	0	19.1
		1	74	25.1	24.9	24.8	24.7	24.6	0	25.7	18.2	17.9	17.8	17.7	17.7	0	19.1
		36	0	23.8	23.9	23.8	23.7	23.7	1	24.7	17.9	18.0	17.8	17.8	17.8	0	19.1
		36	20	24.0	23.9	23.8	23.7	23.7	1	24.7	18.1	18.0	17.9	17.8	17.8	0	19.1
		36	39	24.1	23.8	23.8	23.6	23.6	1	24.7	18.2	17.9	17.8	17.7	17.7	0	19.1
	16QAM	75	0	24.0	23.8	23.8	23.7	23.7	1	24.7	18.0	17.9	17.8	17.7	17.8	0	19.1
		1	0	23.5	23.9	23.7	23.8	23.7	1	24.7	17.6	17.9	17.8	17.8	17.7	0	19.1
		1	37	24.0	23.8	23.7	23.7	23.6	1	24.7	18.2	17.9	17.9	17.8	17.6	0	19.1
		1	74	24.0	23.8	23.7	23.6	23.7	1	24.7	18.2	17.9	17.8	17.7	17.6	0	19.1
		36	0	22.8	23.0	22.8	22.7	22.7	2	23.7	17.9	18.0	17.8	17.8	17.8	0	19.1
		36	20	23.0	23.0	22.8	22.7	22.7	2	23.7	18.1	18.0	17.9	17.8	17.8	0	19.1
	64QAM	36	39	23.1	22.9	22.8	22.6	22.6	2	23.7	18.2	17.9	17.8	17.7	17.7	0	19.1
		75	0	23.0	22.9	22.8	22.7	22.7	2	23.7	18.1	17.9	17.9	17.8	17.8	0	19.1
		1	0	22.6	23.2	22.9	22.8	22.8	2	23.7	17.6	18.2	17.8	17.8	17.8	0	19.1
		1	37	23.3	23.2	23.0	22.8	22.8	2	23.7	18.2	18.1	17.9	17.7	17.9	0	19.1
		1	74	23.4	23.2	23.0	22.8	22.8	2	23.7	18.3	18.2	17.9	17.8	17.8	0	19.1
		36	0	22.0	22.3	22.0	21.9	21.9	3	22.7	17.9	18.2	17.9	17.8	17.8	0	19.1
	256QAM	36	20	22.2	22.2	22.0	21.9	21.9	3	22.7	18.1	18.2	17.9	17.8	17.8	0	19.1
		36	39	22.4	22.2	22.0	21.9	21.8	3	22.7	18.2	18.1	17.9	17.8	17.8	0	19.1
		75	0	22.2	22.3	22.0	21.9	21.9	3	22.7	18.1	18.2	18.0	17.8	17.8	0	19.1
		1	0	19.7	20.2	19.9	19.8	19.8	5	20.7	17.6	17.9	17.9	17.7	17.7	0	19.1
		1	37	20.3	20.2	19.9	19.7	19.8	5	20.7	18.1	18.1	17.9	17.7	17.7	0	19.1
		1	74	20.5	20.1	19.9	19.8	19.8	5	20.7	18.3	18.0	17.9	17.7	17.8	0	19.1
		36	0	20.0	20.3	20.0	19.9	19.9	5	20.7	18.0	18.2	17.9	17.8	17.8	0	19.1
		36	20	20.2	20.3	20.0	19.9	19.9	5	20.7	18.1	18.2	17.9	17.8	17.8	0	19.1
		36	39	20.3	20.2	20.0	19.9	19.9	5	20.7	18.3	18.1	17.9	17.8	17.8	0	19.1
		75	0	20.2	20.3	20.0	19.9	19.9	5	20.7	18.2	18.2	17.9	17.8	17.8	0	19.1

LTE Band 41 Power Class 3 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)							
				39750	40185	40620	41055	41490	MFR	Tune-up Limit	39750	40185	40620	41055	41490	MFR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	24.9	25.0	24.9	24.8	24.8	0	25.7	17.6	17.9	17.7	17.6	17.7	0	19.1
		1	25	25.2	25.1	25.0	24.8	24.8	0	25.7	17.9	17.9	17.8	17.7	17.7	0	19.1
		1	49	25.3	25.0	24.9	24.7	24.8	0	25.7	18.0	17.8	17.7	17.6	17.6	0	19.1
		25	0	24.1	24.1	23.9	23.8	23.8	1	24.7	17.8	17.9	17.8	17.7	17.7	0	19.1
		25	12	24.1	24.0	24.0	23.9	23.9	1	24.7	17.9	17.9	17.9	17.7	17.8	0	19.1
		25	25	24.2	24.0	24.0	23.8	23.9	1	24.7	17.9	17.9	17.9	17.7	17.7	0	19.1
		50	0	24.1	24.0	24.0	23.9	23.8	1	24.7	17.8	17.9	17.8	17.7	17.7	0	19.1
	16QAM	1	0	24.0	24.1	23.8	23.9	23.9	1	24.7	17.7	17.8	17.8	17.7	17.6	0	19.1
		1	25	24.2	24.1	23.8	23.9	23.9	1	24.7	18.0	17.9	17.8	17.8	17.7	0	19.1
		1	49	24.1	24.1	23.8	23.8	23.8	1	24.7	18.1	17.8	17.8	17.7	17.6	0	19.1
		25	0	23.1	23.1	22.9	22.9	22.8	2	23.7	17.8	17.9	17.8	17.7	17.7	0	19.1
		25	12	23.2	23.0	23.0	22.9	22.9	2	23.7	17.9	17.9	17.8	17.7	17.7	0	19.1
		25	25	23.2	23.0	23.0	22.8	22.9	2	23.7	18.0	17.9	17.9	17.7	17.7	0	19.1
		50	0	23.1	23.0	23.0	22.9	22.9	2	23.7	17.8	17.9	17.8	17.7	17.8	0	19.1
	64QAM	1	0	23.0	23.3	23.2	23.0	23.0	2	23.7	17.8	18.1	18.1	17.9	17.8	0	19.1
		1	25	23.4	23.4	23.3	23.0	23.0	2	23.7	18.1	18.2	18.0	17.9	17.8	0	19.1
		1	49	23.5	23.2	23.2	22.9	22.9	2	23.7	18.2	18.1	18.0	17.8	17.8	0	19.1
		25	0	22.2	22.4	22.1	22.0	22.0	3	22.7	18.0	18.3	18.0	17.9	17.9	0	19.1
		25	12	22.4	22.4	22.2	22.0	22.1	3	22.7	18.1	18.3	18.1	18.0	18.0	0	19.1
		25	25	22.5	22.3	22.1	22.0	22.0	3	22.7	18.2	18.2	18.0	18.0	17.9	0	19.1
		50	0	22.3	22.4	22.2	22.0	22.0	3	22.7	18.1	18.3	18.1	17.9	17.9	0	19.1
	256QAM	1	0	20.1	20.3	20.0	20.0	20.0	5	20.7	17.8	18.2	17.9	17.8	17.8	0	19.1
		1	25	20.4	20.4	20.0	19.9	20.1	5	20.7	18.1	18.3	17.9	17.9	17.8	0	19.1
		1	49	20.4	20.2	19.9	19.7	19.9	5	20.7	18.1	18.1	17.8	17.7	17.8	0	19.1
		25	0	20.2	20.4	20.1	20.0	20.0	5	20.7	17.9	18.3	18.0	17.9	17.9	0	19.1
		25	12	20.3	20.4	20.2	20.0	20.1	5	20.7	18.0	18.3	18.1	17.9	18.0	0	19.1
		25	25	20.5	20.3	20.1	20.1	20.0	5	20.7	18.2	18.3	18.0	18.0	17.9	0	19.1
		50	0	20.3	20.4	20.2	20.0	20.0	5	20.7	18.1	18.3	18.1	17.9	18.0	0	19.1
5 MHz	QPSK	1	0	25.0	25.0	24.8	24.8	24.8	0	25.7	17.7	17.8	17.7	17.7	17.6	0	19.1
		1	12	25.3	25.1	25.0	24.9	24.9	0	25.7	18.0	18.0	17.9	17.9	17.8	0	19.1
		1	24	25.2	25.0	24.9	24.8	24.8	0	25.7	17.9	17.9	17.7	17.8	17.7	0	19.1
		12	0	24.1	24.1	24.0	23.8	23.8	1	24.7	17.9	17.9	17.9	17.8	17.7	0	19.1
		12	7	24.1	24.0	24.0	23.9	23.9	1	24.7	17.9	17.9	17.9	17.9	17.8	0	19.1
		12	13	24.2	24.0	24.0	23.9	23.8	1	24.7	17.9	17.9	17.8	17.8	17.7	0	19.1
		25	0	24.1	24.0	23.9	23.9	23.8	1	24.7	17.9	17.9	17.8	17.8	17.7	0	19.1
		1	0	24.2	24.0	23.9	23.9	23.8	1	24.7	17.9	18.0	17.8	17.8	17.8	0	19.1
	16QAM	1	12	24.5	24.2	24.0	24.0	23.9	1	24.7	18.1	18.2	18.0	17.9	17.8	0	19.1
		1	24	24.4	24.0	23.9	24.0	23.8	1	24.7	18.1	18.0	17.8	17.8	17.7	0	19.1
		12	0	23.1	23.0	23.0	22.8	22.8	2	23.7	17.8	17.9	17.9	17.8	17.8	0	19.1
		12	7	23.1	23.0	23.0	22.9	22.9	2	23.7	17.9	17.9	18.0	17.8	17.8	0	19.1
		12	13	23.1	22.9	23.0	22.8	22.8	2	23.7	17.8	17.8	17.9	17.8	17.7	0	19.1
		25	0	23.1	23.0	22.9	22.8	22.8	2	23.7	17.9	17.8	17.8	17.8	17.7	0	19.1
		1	0	23.3	23.3	23.1	22.9	23.0	2	23.7	17.9	18.3	18.1	17.9	17.9	0	19.1
		1	12	23.5	23.4	23.2	23.0	23.1	2	23.7	18.0	18.4	18.2	18.0	18.0	0	19.1
	64QAM	1	24	23.5	23.4	23.2	23.0	23.0	2	23.7	18.1	18.3	18.1	17.9	17.9	0	19.1
		12	0	22.3	22.4	22.2	21.9	22.0	3	22.7	17.9	18.3	18.1	17.9	17.9	0	19.1
		12	7	22.3	22.4	22.2	22.0	22.0	3	22.7	18.0	18.3	18.1	17.9	18.0	0	19.1
		12	13	22.4	22.3	22.2	22.0	22.0	3	22.7	18.1	18.2	18.1	17.9	17.9	0	19.1
		25	0	22.3	22.4	22.2	22.0	22.0	3	22.7	18.0	18.3	18.1	17.9	17.9	0	19.1
		1	0	20.2	20.2	20.1	19.8	19.9	5	20.7	17.9	18.2	18.0	17.8	17.9	0	19.1
		1	12	20.4	20.3	20.2	19.9	19.9	5	20.7	18.1	18.4	18.1	18.0	18.0	0	19.1
		1	24	20.5	20.2	20.1	19.9	19.9	5	20.7	18.2	18.2	18.0	17.9	17.9	0	19.1
	256QAM	12	0	20.3	20.4	20.1	19.9	20.0	5	20.7	18.0	18.3	18.0	17.9	17.9	0	19.1
		12	7	20.3	20.4	20.2	20.0	20.0	5	20.7	18.0	18.3	18.1	17.9	18.0	0	19.1
		12	13	20.4	20.3	20.2	20.0	20.0	5	20.7	18.0	18.2	18.1	17.9	17.9	0	19.1
		25	0	20.3	20.4	20.2	20.0	20.0	5	20.7	18.0	18.3	18.1	17.9	17.9	0	19.1

LTE Band 41 Power Class 3 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit	39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	20.4	20.6	20.6	20.3	20.5	0	21.0	21.9	22.1	22.3	22.0	22.0	0	22.5
		1	49	20.6	20.6	20.7	20.5	20.6	0	21.0	22.3	22.3	22.4	22.0	22.2	0	22.5
		1	99	20.4	20.5	20.6	20.4	20.5	0	21.0	22.3	22.1	22.3	22.0	22.1	0	22.5
		50	0	20.6	20.7	20.6	20.4	20.6	0	21.0	22.2	22.2	22.3	21.9	22.1	0	22.5
		50	24	20.7	20.7	20.7	20.5	20.7	0	21.0	22.3	22.3	22.4	22.1	22.2	0	22.5
		50	50	20.6	20.6	20.6	20.4	20.6	0	21.0	22.2	22.1	22.3	21.9	22.1	0	22.5
		100	0	20.7	20.6	20.7	20.4	20.6	0	21.0	22.3	22.3	22.1	22.1	22.2	0	22.5
	16QAM	1	0	20.2	20.3	20.6	20.4	20.3	0	21.0	21.8	22.0	21.7	21.6	22.0	0	22.5
		1	49	20.6	20.5	20.6	20.6	20.5	0	21.0	22.0	22.1	21.6	21.6	22.1	0	22.5
		1	99	20.5	20.4	20.6	20.4	20.4	0	21.0	22.0	22.0	21.7	21.7	22.0	0	22.5
		50	0	20.4	20.4	20.2	20.2	20.3	0	21.0	22.0	22.0	21.7	21.6	21.8	0	22.5
		50	24	20.5	20.5	20.2	20.2	20.4	0	21.0	22.0	21.9	21.7	21.7	21.8	0	22.5
		50	50	20.5	20.4	20.2	20.2	20.4	0	21.0	22.0	21.9	21.7	21.7	21.8	0	22.5
		100	0	20.4	20.4	20.2	20.2	20.4	0	21.0	22.0	22.0	21.7	21.7	21.9	0	22.5
	64QAM	1	0	19.9	20.2	20.2	20.1	20.0	0	21.0	21.7	21.9	21.9	21.9	21.9	0	22.5
		1	49	20.3	20.1	20.1	20.2	20.0	0	21.0	21.9	22.0	22.0	21.8	21.8	0	22.5
		1	99	20.2	20.1	20.0	20.2	20.2	0	21.0	21.9	22.0	21.6	21.8	21.8	0	22.5
		50	0	20.1	20.1	20.2	20.3	20.2	0	21.0	21.4	21.6	21.5	21.4	21.4	0	22.5
		50	24	20.2	20.1	20.2	20.3	20.2	0	21.0	21.5	21.6	21.4	21.4	21.4	0	22.5
		50	50	20.2	20.1	20.1	20.2	20.2	0	21.0	21.4	21.5	21.4	21.4	21.4	0	22.5
		100	0	20.2	20.1	20.2	20.3	20.2	0	21.0	21.5	21.5	21.4	21.4	21.4	0	22.5
	256QAM	1	0	19.0	19.2	19.2	19.4	19.2	0.3	20.7	19.3	19.6	19.5	19.5	19.4	1.8	20.7
		1	49	19.3	19.0	19.1	19.2	19.1	0.3	20.7	19.5	19.6	19.4	19.4	19.4	1.8	20.7
		1	99	19.3	19.0	19.1	19.2	19.1	0.3	20.7	19.4	19.6	19.3	19.2	19.4	1.8	20.7
		50	0	19.1	19.1	19.2	19.3	19.2	0.3	20.7	19.4	19.6	19.5	19.4	19.4	1.8	20.7
		50	24	19.2	19.1	19.2	19.3	19.2	0.3	20.7	19.5	19.6	19.4	19.4	19.4	1.8	20.7
		50	50	19.1	19.1	19.1	19.2	19.1	0.3	20.7	19.4	19.5	19.4	19.4	19.4	1.8	20.7
		100	0	19.2	19.1	19.2	19.3	19.1	0.3	20.7	19.4	19.6	19.4	19.4	19.4	1.8	20.7
15 MHz	QPSK	1	0	20.3	20.5	20.2	20.1	20.4	0	21.0	21.8	21.8	21.6	21.6	21.8	0	22.5
		1	37	20.5	20.4	20.1	20.1	20.3	0	21.0	22.0	21.9	21.6	21.6	21.8	0	22.5
		1	74	20.5	20.4	20.2	20.1	20.4	0	21.0	22.0	21.9	21.6	21.7	21.9	0	22.5
		36	0	20.5	20.5	20.2	20.2	20.4	0	21.0	21.9	21.9	21.7	21.7	21.8	0	22.5
		36	20	20.5	20.5	20.2	20.2	20.4	0	21.0	21.9	21.9	21.7	21.7	21.9	0	22.5
		36	39	20.5	20.4	20.2	20.3	20.4	0	21.0	21.9	21.9	21.7	21.7	21.9	0	22.5
		75	0	20.5	20.5	20.2	20.2	20.4	0	21.0	21.9	21.9	21.7	21.7	21.8	0	22.5
	16QAM	1	0	20.3	20.5	20.2	20.1	20.4	0	21.0	21.8	22.1	21.6	21.6	21.9	0	22.5
		1	37	20.5	20.4	20.1	20.1	20.5	0	21.0	21.9	21.9	21.6	20.8	21.8	0	22.5
		1	74	20.4	20.5	20.2	20.2	20.5	0	21.0	21.9	22.0	21.6	21.6	22.0	0	22.5
		36	0	20.5	20.4	20.2	20.2	20.4	0	21.0	21.9	21.9	21.6	21.7	21.8	0	22.5
		36	20	20.5	20.4	20.2	20.2	20.4	0	21.0	22.0	21.9	21.6	21.7	21.9	0	22.5
		36	39	20.5	20.4	20.2	20.2	20.4	0	21.0	22.0	21.9	21.7	21.7	21.9	0	22.5
		75	0	20.5	20.4	20.2	20.2	20.4	0	21.0	21.9	21.9	21.7	21.7	21.9	0	22.5
	64QAM	1	0	20.0	20.3	20.1	19.9	20.0	0	21.0	21.7	22.0	21.9	21.9	21.9	0	22.5
		1	37	20.1	20.3	20.1	20.0	20.0	0	21.0	21.8	22.1	21.9	21.8	21.8	0	22.5
		1	74	20.1	20.3	20.1	20.0	20.2	0	21.0	21.9	22.0	21.8	21.8	21.9	0	22.5
		36	0	20.1	20.4	20.2	20.1	20.1	0	21.0	21.6	21.8	21.7	21.6	21.6	0	22.5
		36	20	20.2	20.5	20.1	20.1	20.1	0	21.0	21.6	21.8	21.6	21.6	21.6	0	22.5
		36	39	20.1	20.4	20.1	20.1	20.2	0	21.0	21.6	21.7	21.6	21.6	21.6	0	22.5
		75	0	20.2	20.4	20.1	20.1	20.2	0	21.0	21.7	21.8	21.6	21.6	21.6	0	22.5
	256QAM	1	0	19.1	19.3	19.1	19.0	19.0	0.3	20.7	19.5	19.8	19.6	19.6	19.7	1.8	20.7
		1	37	19.1	19.3	19.1	19.2	19.0	0.3	20.7	19.4	19.8	19.6	19.5	19.6	1.8	20.7
		1	74	19.1	19.0	19.0	18.9	19.1	0.3	20.7	19.4	19.7	19.5	19.5	19.7	1.8	20.7
		36	0	19.1	19.4	19.2	19.1	19.1	0.3	20.7	19.6	19.8	19.7	19.6	19.6	1.8	20.7
		36	20	19.2	19.4	19.1	19.1	19.1	0.3	20.7	19.7	19.8	19.6	19.6	19.6	1.8	20.7
		36	39	19.1	19.3	19.1	19.1	19.2	0.3	20.7	19.6	19.7	19.6	19.6	19.7	1.8	20.7
		75	0	19.2	19.4	19.1	19.1	19.2	0.3	20.7	19.6	19.8	19.6	19.6	19.6	1.8	20.7

LTE Band 41 Power Class 3 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)							Power Mode B (dBm)						
				39750	40185	40620	41055	41490	MFR	Tune-up Limit	39750	40185	40620	41055	41490	MFR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz			2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	20.4	20.3	20.1	20.1	20.2	0	21.0	22.0	22.0	21.8	21.7	21.9	0	22.5
		1	25	20.5	20.4	20.1	20.1	20.3	0	21.0	22.2	22.0	21.8	21.8	21.9	0	22.5
		1	49	20.5	20.3	20.0	20.1	20.2	0	21.0	22.1	22.0	21.7	21.7	21.9	0	22.5
		25	0	20.4	20.4	20.1	20.1	20.3	0	21.0	22.1	22.0	21.8	21.8	22.0	0	22.5
		25	12	20.5	20.4	20.2	20.2	20.3	0	21.0	22.2	22.1	21.8	21.8	22.0	0	22.5
		25	25	20.4	20.3	20.1	20.2	20.4	0	21.0	22.1	22.0	21.8	21.9	22.0	0	22.5
		50	0	20.4	20.4	20.1	20.2	20.3	0	21.0	22.1	22.0	21.8	21.8	22.0	0	22.5
		1	0	20.4	20.4	20.0	20.1	20.3	0	21.0	22.0	22.0	21.7	21.8	21.9	0	22.5
	16QAM	1	25	20.5	20.5	20.0	20.1	20.3	0	21.0	22.1	22.1	21.6	21.7	22.1	0	22.5
		1	49	20.4	20.4	19.9	20.0	20.3	0	21.0	22.0	22.0	21.6	21.7	21.9	0	22.5
		25	0	20.5	20.4	20.1	20.1	20.3	0	21.0	22.1	22.0	21.8	21.8	22.0	0	22.5
		25	12	20.5	20.5	20.2	20.2	20.3	0	21.0	22.2	22.1	21.8	21.9	22.0	0	22.5
		25	25	20.4	20.3	20.2	20.2	20.4	0	21.0	22.1	22.0	21.8	21.9	22.0	0	22.5
		50	0	20.4	20.4	20.1	20.1	20.3	0	21.0	22.1	22.1	21.8	21.8	21.7	0	22.5
		1	0	19.9	20.1	20.0	19.9	20.1	0	21.0	21.7	22.0	21.8	21.7	21.7	0	22.5
		1	25	20.1	20.1	19.9	20.0	20.2	0	21.0	21.8	21.9	21.8	21.8	21.7	0	22.5
	64QAM	1	49	20.0	20.0	19.8	19.9	20.1	0	21.0	21.8	21.7	21.6	21.7	21.7	0	22.5
		25	0	20.1	20.1	20.1	20.0	20.1	0	21.0	21.8	21.9	21.8	21.7	21.7	0	22.5
		25	12	20.2	20.1	20.1	20.1	20.1	0	21.0	21.9	21.9	21.8	21.8	21.8	0	22.5
		25	25	20.1	20.0	20.1	20.0	20.1	0	21.0	21.8	21.8	21.8	21.7	21.8	0	22.5
		50	0	20.1	20.1	20.1	20.0	20.1	0	21.0	21.8	21.9	21.8	21.7	21.8	0	22.5
		1	0	19.1	19.1	19.0	18.9	18.9	0.3	20.7	19.6	19.8	19.8	19.7	19.7	1.8	20.7
		1	25	19.1	19.1	19.1	18.8	18.9	0.3	20.7	19.7	19.8	19.8	19.8	19.8	1.8	20.7
		1	49	18.9	19.0	18.9	18.8	18.8	0.3	20.7	19.6	19.6	19.6	19.7	19.7	1.8	20.7
	256QAM	25	0	19.1	19.1	19.1	19.0	19.0	0.3	20.7	19.8	19.9	19.8	19.7	19.7	1.8	20.7
		25	12	19.1	19.1	19.1	19.0	19.1	0.3	20.7	19.9	19.9	19.8	19.8	19.8	1.8	20.7
		25	25	19.1	19.0	19.1	19.1	19.1	0.3	20.7	19.8	19.8	19.8	19.8	19.8	1.8	20.7
		50	0	19.1	19.1	19.1	19.0	19.1	0.3	20.7	19.8	19.9	19.8	19.7	19.8	1.8	20.7
5 MHz	QPSK	1	0	20.4	20.3	20.0	20.0	20.2	0	21.0	22.1	21.9	21.7	21.7	21.8	0	22.5
		1	12	20.5	20.3	20.1	20.1	20.3	0	21.0	22.2	22.0	21.8	21.8	22.0	0	22.5
		1	24	20.4	20.3	20.1	20.1	20.3	0	21.0	22.1	22.0	21.8	21.8	21.9	0	22.5
		12	0	20.5	20.4	20.1	20.1	20.3	0	21.0	22.1	22.0	21.8	21.8	22.0	0	22.5
		12	7	20.4	20.4	20.1	20.2	20.3	0	21.0	22.1	22.1	21.8	21.8	22.0	0	22.5
		12	13	20.4	20.3	20.1	19.0	20.3	0	21.0	22.1	22.0	21.8	21.8	22.0	0	22.5
		25	0	20.4	20.3	20.1	20.1	20.3	0	21.0	22.2	22.0	21.8	21.8	22.0	0	22.5
		1	0	20.5	20.5	20.2	20.2	20.2	0	21.0	22.0	22.0	21.7	21.6	21.9	0	22.5
	16QAM	1	12	20.5	20.5	20.2	20.3	20.5	0	21.0	22.1	22.1	21.8	21.8	21.9	0	22.5
		1	24	20.4	20.5	20.2	20.3	20.4	0	21.0	22.0	22.0	21.7	21.7	22.0	0	22.5
		12	0	20.4	20.3	20.1	20.1	20.2	0	21.0	22.0	22.0	21.8	21.6	21.8	0	22.5
		12	7	20.4	20.3	20.2	20.1	20.3	0	21.0	21.9	21.8	21.7	21.6	21.9	0	22.5
		12	13	20.4	20.2	20.1	20.1	20.2	0	21.0	21.9	21.8	21.6	21.6	21.8	0	22.5
		25	0	20.5	20.4	20.1	20.1	20.2	0	21.0	21.9	21.8	21.6	21.6	21.7	0	22.5
		1	0	20.0	20.1	19.9	20.0	20.0	0	21.0	21.9	22.1	21.9	22.0	21.9	0	22.5
		1	12	20.1	20.1	20.0	20.1	20.0	0	21.0	22.1	22.2	21.9	22.1	22.0	0	22.5
	64QAM	1	24	20.0	20.1	20.0	20.0	20.1	0	21.0	22.0	22.1	21.9	21.9	21.9	0	22.5
		12	0	20.1	20.2	20.0	20.0	20.1	0	21.0	21.8	21.8	21.8	21.7	21.7	0	22.5
		12	7	20.1	20.3	20.1	20.1	20.1	0	21.0	21.9	21.9	21.8	21.7	21.8	0	22.5
		12	13	20.0	20.2	20.0	20.0	20.0	0	21.0	21.8	21.7	21.8	21.7	21.7	0	22.5
		25	0	20.1	20.2	20.1	20.0	20.0	0	21.0	21.8	21.8	21.8	21.7	21.8	0	22.5
		1	0	19.1	19.1	19.0	19.0	19.0	0.3	20.7	19.7	19.8	19.6	19.6	19.7	1.8	20.7
		1	12	19.2	19.1	18.9	19.0	19.0	0.3	20.7	19.9	19.9	19.6	19.7	19.8	1.8	20.7
		1	24	19.1	18.8	18.9	18.9	19.0	0.3	20.7	19.8	19.8	19.6	19.6	19.8	1.8	20.7
	256QAM	12	0	19.1	19.2	19.0	19.0	19.1	0.3	20.7	19.8	19.9	19.8	19.7	19.7	1.8	20.7
		12	7	19.1	19.2	19.1	19.0	19.1	0.3	20.7	19.8	19.9	19.8	19.7	19.7	1.8	20.7
		12	13	19.0	19.1	19.0	19.0	19.1	0.3	20.7	19.7	19.8	19.8	19.7	19.7	1.8	20.7
		25	0	19.1	19.2	19.0	19.0	19.0	0.3	20.7	19.8	19.8	19.8	19.7	19.7	1.8	20.7

LTE Band 48 Measured Results (ANT7)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55340	55773	56207	56640	MFR	Tune-up Limit	55340	55773	56207	56640	MFR	Tune-up Limit
				3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz			3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz		
20 MHz	QPSK	1	0	24.8	24.8	25.0	24.8	0	25.4	21.8	21.8	21.7	21.8	0	22.1
		1	49	24.8	24.8	25.0	24.8	0	25.4	21.8	21.8	21.8	21.8	0	22.1
		1	99	24.7	24.7	25.0	24.8	0	25.4	21.8	21.8	21.8	21.8	0	22.1
		50	0	23.9	23.8	24.0	23.8	0.4	25	21.8	21.9	21.8	21.9	0	22.1
		50	24	23.9	23.9	24.2	23.8	0.4	25	21.9	21.9	21.8	21.9	0	22.1
		50	50	23.9	23.9	24.2	23.7	0.4	25	21.8	21.9	21.7	21.9	0	22.1
	16QAM	1	0	23.9	23.9	24.1	23.8	0.4	25	21.9	21.9	21.9	21.9	0	22.1
		1	49	24.1	24.1	24.2	24.2	0.4	25	21.7	21.7	21.7	21.6	0	22.1
		1	99	23.8	23.9	24.1	23.9	0.4	25	21.6	21.6	21.6	21.5	0	22.1
		50	0	22.9	22.9	23.0	22.8	1.4	24	21.5	21.5	21.4	21.5	0	22.1
		50	24	22.9	22.9	23.1	22.9	1.4	24	21.5	21.6	21.5	21.6	0	22.1
		50	50	22.9	22.9	23.2	23.0	1.4	24	21.6	21.6	21.6	21.6	0	22.1
	64QAM	1	0	22.9	22.9	23.0	22.8	1.4	24	21.5	21.5	21.5	21.6	0	22.1
		1	49	22.9	23.1	22.5	23.1	1.4	24	21.5	21.8	21.6	21.5	0	22.1
		1	99	22.9	23.1	22.4	22.9	1.4	24	21.5	21.7	21.5	21.5	0	22.1
		50	0	21.9	22.0	21.5	22.0	2.4	23	21.5	21.6	21.5	21.6	0	22.1
		50	24	22.0	22.1	21.5	22.1	2.4	23	21.5	21.7	21.5	21.7	0	22.1
		50	50	22.0	22.1	21.6	22.1	2.4	23	21.6	21.7	21.6	21.6	0	22.1
	256QAM	1	0	20.0	19.9	19.6	19.9	4.4	21	20.3	20.2	20.1	20.3	1.1	21
		1	49	20.1	19.9	19.6	19.9	4.4	21	20.3	20.2	20.2	20.3	1.1	21
		1	99	20.2	20.1	19.7	20.0	4.4	21	20.3	20.3	20.2	20.3	1.1	21
		50	0	19.9	20.0	19.5	20.0	4.4	21	20.2	20.3	20.1	20.2	1.1	21
		50	24	20.0	20.1	19.6	20.1	4.4	21	20.2	20.3	20.1	20.3	1.1	21
		50	50	20.0	20.1	19.6	20.1	4.4	21	20.3	20.3	20.2	20.4	1.1	21
15 MHz	QPSK	1	0	24.9	24.7	25.0	24.8	0	25.4	21.5	21.4	21.3	21.4	0	22.1
		1	37	24.8	24.8	25.0	24.9	0	25.4	21.5	21.5	21.5	21.6	0	22.1
		1	74	24.8	24.7	25.1	24.8	0	25.4	21.5	21.4	21.5	21.6	0	22.1
		36	0	23.9	23.8	24.0	23.8	0.4	25	21.6	21.5	21.4	21.5	0	22.1
		36	20	23.9	23.8	24.1	23.8	0.4	25	21.6	21.5	21.5	21.5	0	22.1
		36	39	23.9	23.9	24.1	23.9	0.4	25	21.6	21.5	21.5	21.6	0	22.1
	16QAM	75	0	23.9	23.8	24.1	23.8	0.4	25	21.6	21.5	21.5	21.5	0	22.1
		1	0	23.8	23.7	23.8	23.8	0.4	25	21.6	21.3	21.5	21.5	0	22.1
		1	37	23.9	23.7	24.0	23.9	0.4	25	21.5	21.3	21.5	21.6	0	22.1
		1	74	23.9	23.7	24.0	23.9	0.4	25	21.6	21.3	21.5	21.5	0	22.1
		36	0	22.9	22.8	23.0	22.8	1.4	24	21.6	21.5	21.5	21.5	0	22.1
		36	20	22.9	22.9	23.1	22.8	1.4	24	21.6	21.5	21.5	21.5	0	22.1
	64QAM	36	39	22.9	22.9	23.2	22.9	1.4	24	21.6	21.6	21.6	21.6	0	22.1
		75	0	22.9	22.8	23.1	22.8	1.4	24	21.6	21.5	21.5	21.5	0	22.1
		1	0	22.8	22.9	22.5	22.9	1.4	24	21.4	21.5	21.4	21.6	0	22.1
		1	37	22.8	22.9	22.5	23.0	1.4	24	21.4	21.6	21.6	21.6	0	22.1
		1	74	22.8	23.1	22.6	22.9	1.4	24	21.4	21.6	21.5	21.6	0	22.1
		36	0	21.9	22.0	21.5	22.0	2.4	23	21.5	21.6	21.5	21.6	0	22.1
	256QAM	36	20	21.9	22.0	21.6	22.0	2.4	23	21.5	21.6	21.6	21.7	0	22.1
		36	39	22.0	22.1	21.6	22.1	2.4	23	21.6	21.7	21.6	21.7	0	22.1
		75	0	21.9	22.0	21.6	22.1	2.4	23	21.5	21.6	21.6	21.7	0	22.1
		1	0	19.8	19.9	19.4	19.9	4.4	21	20.1	20.2	20.0	20.2	1.1	21
		1	37	19.8	19.9	19.5	20.0	4.4	21	20.2	20.3	20.2	20.3	1.1	21
		1	74	20.0	20.0	19.6	20.0	4.4	21	20.3	20.3	20.2	20.3	1.1	21
	256QAM	36	0	19.9	20.0	19.5	20.0	4.4	21	20.2	20.3	20.1	20.3	1.1	21
		36	20	19.9	20.0	19.6	20.0	4.4	21	20.2	20.3	20.2	20.3	1.1	21
		36	39	20.0	20.1	19.6	20.1	4.4	21	20.2	20.4	20.2	20.3	1.1	21
		75	0	20.0	20.1	19.6	20.1	4.4	21	20.2	20.3	20.2	20.3	1.1	21

LTE Band 48 Measured Results (ANT7) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55290	55757	56223	56690	MFR	Tune-up Limit	55290	55757	56223	56690	MFR	Tune-up Limit
				3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz			3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz		
10 MHz	QPSK	1	0	25.0	25.0	25.2	25.0	0	25.4	21.6	21.6	21.5	21.7	0	22.1
		1	25	25.0	24.9	25.2	25.0	0	25.4	21.6	21.6	21.6	21.7	0	22.1
		1	49	24.9	24.9	25.2	25.0	0	25.4	21.6	21.6	21.6	21.7	0	22.1
		25	0	24.0	24.0	24.2	23.9	0.4	25	21.7	21.7	21.6	21.7	0	22.1
		25	12	24.1	24.0	24.2	24.0	0.4	25	21.7	21.7	21.6	21.7	0	22.1
		25	25	24.1	24.0	24.2	24.0	0.4	25	21.7	21.7	21.7	21.7	0	22.1
		50	0	24.1	24.0	24.2	24.0	0.4	25	21.7	21.7	21.6	21.7	0	22.1
	16QAM	1	0	24.1	23.8	24.3	24.0	0.4	25	21.7	21.6	21.7	21.7	0	22.1
		1	25	24.2	23.8	24.3	24.0	0.4	25	21.7	21.5	21.7	21.7	0	22.1
		1	49	24.1	23.8	24.3	24.0	0.4	25	21.7	21.5	21.7	21.7	0	22.1
		25	0	23.0	23.0	23.2	23.0	1.4	24	21.7	21.7	21.6	21.6	0	22.1
		25	12	23.1	23.0	23.2	23.0	1.4	24	21.7	21.7	21.6	21.6	0	22.1
		25	25	23.1	23.0	23.2	23.1	1.4	24	21.7	21.7	21.7	21.7	0	22.1
		50	0	23.0	23.0	23.2	23.0	1.4	24	21.7	21.7	21.6	21.7	0	22.1
	64QAM	1	0	23.0	23.0	22.7	23.1	1.4	24	21.5	21.6	21.6	21.7	0	22.1
		1	25	23.0	23.1	22.7	23.2	1.4	24	21.5	21.6	21.6	21.7	0	22.1
		1	49	23.0	23.1	22.7	23.1	1.4	24	21.5	21.6	21.6	21.7	0	22.1
		25	0	22.0	22.1	21.6	22.0	2.4	23	21.6	21.7	21.6	21.7	0	22.1
		25	12	22.1	22.2	21.7	22.1	2.4	23	21.6	21.6	21.7	21.7	0	22.1
		25	25	22.1	22.2	21.8	22.2	2.4	23	21.7	21.6	21.7	21.6	0	22.1
		50	0	22.1	22.1	21.6	22.1	2.4	23	21.6	21.6	21.6	21.5	0	22.1
	256QAM	1	0	19.9	20.0	19.7	20.0	4.4	21	20.2	20.2	20.1	20.2	1.1	21
		1	25	20.0	20.0	19.6	20.0	4.4	21	20.3	20.2	20.1	20.2	1.1	21
		1	49	20.0	20.0	19.6	19.9	4.4	21	20.2	20.2	20.2	20.1	1.1	21
		25	0	20.0	20.1	19.7	20.1	4.4	21	20.3	20.3	20.2	20.2	1.1	21
		25	12	20.1	20.2	19.7	20.1	4.4	21	20.3	20.3	20.3	20.2	1.1	21
		25	25	20.1	20.2	19.8	20.2	4.4	21	20.4	20.3	20.3	20.3	1.1	21
		50	0	20.1	20.1	19.7	20.1	4.4	21	20.3	20.3	20.2	20.2	1.1	21
5 MHz	QPSK	1	0	24.9	24.9	25.1	24.9	0	25.4	21.6	21.5	21.5	21.6	0	22.1
		1	12	25.0	25.0	25.2	25.1	0	25.4	21.7	21.6	21.7	21.7	0	22.1
		1	24	25.0	24.9	25.2	25.0	0	25.4	21.7	21.6	21.6	21.7	0	22.1
		12	0	24.0	24.0	24.1	24.0	0.4	25	21.7	21.6	21.6	21.7	0	22.1
		12	7	24.0	24.0	24.2	24.0	0.4	25	21.7	21.7	21.6	21.7	0	22.1
		12	13	24.0	24.0	24.2	24.0	0.4	25	21.7	21.7	21.6	21.7	0	22.1
		25	0	24.0	23.9	24.1	24.0	0.4	25	21.7	21.6	21.6	21.7	0	22.1
	16QAM	1	0	23.9	24.0	24.3	24.0	0.4	25	21.7	21.5	21.5	21.6	0	22.1
		1	12	24.0	24.2	24.3	24.1	0.4	25	21.7	21.6	21.7	21.7	0	22.1
		1	24	24.0	24.0	24.3	24.1	0.4	25	21.7	21.6	21.6	21.7	0	22.1
		12	0	23.0	23.0	23.1	23.1	1.4	24	21.7	21.6	21.5	21.6	0	22.1
		12	7	23.1	23.0	23.1	23.1	1.4	24	21.7	21.7	21.6	21.6	0	22.1
		12	13	23.0	23.0	23.2	23.1	1.4	24	21.7	21.6	21.6	21.8	0	22.1
		25	0	23.1	23.0	23.1	23.0	1.4	24	21.7	21.6	21.5	21.7	0	22.1
	64QAM	1	0	23.0	23.1	22.7	23.2	1.4	24	21.6	21.6	21.6	21.7	0	22.1
		1	12	23.0	23.1	22.8	23.3	1.4	24	21.7	21.7	21.6	21.7	0	22.1
		1	24	23.1	23.2	22.7	23.2	1.4	24	21.7	21.7	21.7	21.7	0	22.1
		12	0	22.0	22.1	21.6	22.2	2.4	23	21.7	21.7	21.6	21.8	0	22.1
		12	7	22.0	22.1	21.6	22.2	2.4	23	21.7	21.7	21.6	21.8	0	22.1
		12	13	22.0	22.1	21.7	22.2	2.4	23	21.6	21.7	21.7	21.7	0	22.1
		25	0	22.0	22.1	21.6	22.2	2.4	23	21.7	21.7	21.6	21.8	0	22.1
	256QAM	1	0	19.9	20.0	19.6	20.1	4.4	21	20.3	20.2	20.1	20.2	1.1	21
		1	12	20.0	20.0	19.8	20.2	4.4	21	20.3	20.3	20.4	20.3	1.1	21
		1	24	20.0	20.0	19.7	20.2	4.4	21	20.3	20.2	20.3	20.2	1.1	21
		12	0	20.0	20.1	19.6	20.2	4.4	21	20.3	20.3	20.2	20.3	1.1	21
		12	7	20.0	20.2	19.6	20.2	4.4	21	20.3	20.4	20.2	20.3	1.1	21
		12	13	20.0	20.1	19.7	20.1	4.4	21	20.3	20.3	20.3	20.3	1.1	21
		25	0	20.0	20.1	19.6	20.2	4.4	21	20.3	20.3	20.2	20.2	1.1	21

LTE Band 48 Measured Results (ANT8)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55340	55773	56207	56640	MPR	Tune-up Limit	55340	55773	56207	56640	MPR	Tune-up Limit
				3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz			3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz		
20 MHz	QPSK	1	0	21.3	21.5	21.5	21.4	0	22.5	21.8	22.0	22.0	22.0	0	23
		1	49	21.5	21.6	21.6	21.5	0	22.5	22.0	22.1	22.2	22.1	0	23
		1	99	21.4	21.6	21.5	21.4	0	22.5	22.0	22.0	22.1	22.0	0	23
		50	0	21.4	21.6	21.6	21.4	0	22.5	22.0	22.1	22.1	22.0	0	23
		50	24	21.5	21.7	21.7	21.6	0	22.5	22.0	22.2	22.2	22.1	0	23
		50	50	21.4	21.7	21.7	21.4	0	22.5	21.9	22.1	22.1	22.1	0	23
		100	0	21.5	21.7	21.7	21.5	0	22.5	22.0	22.2	22.2	22.0	0	23
	16QAM	1	0	21.2	21.4	21.4	21.2	0	22.5	21.6	21.9	21.9	21.9	0	23
		1	49	21.4	21.5	21.5	21.5	0	22.5	21.8	22.1	21.9	22.1	0	23
		1	99	21.2	21.4	21.4	21.2	0	22.5	21.8	22.0	22.0	21.8	0	23
		50	0	21.2	21.4	21.3	21.2	0	22.5	21.7	21.9	21.8	21.7	0	23
		50	24	21.2	21.4	21.4	21.2	0	22.5	21.7	21.9	21.9	21.8	0	23
		50	50	21.3	21.5	21.4	21.3	0	22.5	21.8	22.0	21.9	21.8	0	23
		100	0	21.2	21.4	21.4	21.2	0	22.5	21.7	22.0	21.9	21.8	0	23
	64QAM	1	0	21.0	21.2	21.2	21.1	0	22.5	21.5	21.7	21.8	21.8	0	23
		1	49	21.1	21.5	21.2	21.3	0	22.5	21.7	21.8	21.9	21.8	0	23
		1	99	21.2	21.4	21.3	21.1	0	22.5	21.6	21.8	21.7	21.7	0	23
		50	0	21.3	21.3	21.3	21.2	0	22.5	21.7	21.9	21.8	21.7	0.3	22.7
		50	24	21.3	21.4	21.4	21.2	0	22.5	21.8	21.9	21.9	21.7	0.3	22.7
		50	50	21.3	21.5	21.4	21.3	0	22.5	21.8	22.0	21.9	21.8	0.3	22.7
		100	0	21.3	21.4	21.4	21.2	0	22.5	21.7	21.9	21.9	21.7	0.3	22.7
	256QAM	1	0	20.4	20.4	20.4	20.4	1.8	20.7	20.1	20.5	20.5	20.4	2.3	20.7
		1	49	20.3	20.4	20.4	20.4	1.8	20.7	20.2	20.5	20.4	20.5	2.3	20.7
		1	99	20.5	20.6	20.5	20.4	1.8	20.7	20.3	20.7	20.5	20.4	2.3	20.7
		50	0	20.4	20.4	20.4	20.3	1.8	20.7	20.3	20.5	20.4	20.3	2.3	20.7
		50	24	20.4	20.5	20.5	20.3	1.8	20.7	20.4	20.5	20.5	20.3	2.3	20.7
		50	50	20.4	20.6	20.5	20.4	1.8	20.7	20.4	20.6	20.5	20.4	2.3	20.7
		100	0	20.4	20.5	20.5	20.3	1.8	20.7	20.3	20.5	20.5	20.3	2.3	20.7
15 MHz	QPSK	1	0	21.1	21.3	21.4	21.2	0	22.5	21.5	21.8	21.7	21.7	0	23
		1	37	21.2	21.4	21.4	21.3	0	22.5	21.7	21.9	21.8	21.8	0	23
		1	74	21.2	21.4	21.4	21.2	0	22.5	21.7	21.9	21.7	21.7	0	23
		36	0	21.2	21.4	21.3	21.2	0	22.5	21.7	21.9	21.7	21.7	0	23
		36	20	21.2	21.4	21.4	21.3	0	22.5	21.7	21.9	21.8	21.8	0	23
		36	39	21.3	21.5	21.4	21.3	0	22.5	21.8	22.0	21.8	21.8	0	23
		75	0	21.2	21.4	21.4	21.3	0	22.5	21.7	21.9	21.8	21.8	0	23
	16QAM	1	0	21.0	21.2	21.3	21.1	0	22.5	21.6	21.6	21.7	21.8	0	23
		1	37	21.2	21.4	21.5	21.2	0	22.5	21.7	21.8	21.8	21.8	0	23
		1	74	21.2	21.4	21.4	21.1	0	22.5	21.7	21.7	21.8	21.8	0	23
		36	0	21.2	21.4	21.3	21.2	0	22.5	21.7	21.9	21.7	21.7	0	23
		36	20	21.2	21.4	21.4	21.3	0	22.5	21.7	21.9	21.8	21.8	0	23
		36	39	21.3	21.5	21.4	21.3	0	22.5	21.7	22.0	21.8	21.8	0	23
		75	0	21.2	21.4	21.4	21.3	0	22.5	21.7	21.9	21.8	21.8	0	23
	64QAM	1	0	21.2	21.2	21.1	21.3	0	22.5	21.6	21.6	21.7	21.7	0	23
		1	37	21.2	21.3	21.2	21.2	0	22.5	21.7	21.8	21.8	21.8	0	23
		1	74	21.3	21.3	21.3	21.2	0	22.5	21.6	22.0	21.8	21.7	0	23
		36	0	21.3	21.3	21.3	21.2	0	22.5	21.7	21.9	21.8	21.7	0.3	22.7
		36	20	21.3	21.4	21.3	21.3	0	22.5	21.7	21.9	21.9	21.8	0.3	22.7
		36	39	21.3	21.4	21.4	21.3	0	22.5	21.8	21.9	21.9	21.8	0.3	22.7
		75	0	21.3	21.4	21.4	21.3	0	22.5	21.7	21.9	21.9	21.8	0.3	22.7
	256QAM	1	0	20.0	20.3	20.3	20.2	1.8	20.7	20.1	20.4	20.3	20.3	2.3	20.7
		1	37	20.2	20.4	20.5	20.4	1.8	20.7	20.2	20.5	20.5	20.4	2.3	20.7
		1	74	20.3	20.6	20.5	20.3	1.8	20.7	20.3	20.7	20.5	20.4	2.3	20.7
		36	0	20.3	20.5	20.4	20.3	1.8	20.7	20.3	20.4	20.4	20.3	2.3	20.7
		36	20	20.4	20.5	20.5	20.4	1.8	20.7	20.3	20.5	20.5	20.4	2.3	20.7
		36	39	20.4	20.5	20.5	20.4	1.8	20.7	20.4	20.5	20.5	20.4	2.3	20.7
		75	0	20.4	20.5	20.5	20.4	1.8	20.7	20.3	20.5	20.5	20.4	2.3	20.7

LTE Band 48 Measured Results (ANT8) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55290	55757	56223	56690	MFR	Tune-up Limit	55290	55757	56223	56690	MFR	Tune-up Limit
				3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz			3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz		
10 MHz	QPSK	1	0	21.3	21.4	21.4	21.4	0	22.5	21.7	22.0	21.9	21.9	0	23
		1	25	21.3	21.4	21.5	21.4	0	22.5	21.8	22.0	21.9	21.9	0	23
		1	49	21.3	21.4	21.4	21.4	0	22.5	21.8	22.0	22.0	21.8	0	23
		25	0	21.4	21.4	21.4	21.4	0	22.5	21.8	22.0	21.9	21.9	0	23
		25	12	21.4	21.4	21.4	21.4	0	22.5	21.9	22.1	21.9	21.9	0	23
		25	25	21.4	21.5	21.4	21.4	0	22.5	21.9	22.1	22.0	21.9	0	23
		50	0	21.4	21.4	21.4	21.3	0	22.5	21.8	22.0	21.9	21.8	0	23
	16QAM	1	0	21.3	21.4	21.5	21.3	0	22.5	21.8	22.0	22.0	21.8	0	23
		1	25	21.4	21.4	21.4	21.3	0	22.5	21.9	22.0	22.1	21.9	0	23
		1	49	21.4	21.4	21.4	21.3	0	22.5	21.9	22.0	22.0	21.9	0	23
		25	0	21.3	21.5	21.4	21.4	0	22.5	21.8	22.0	21.9	21.9	0	23
		25	12	21.4	21.5	21.4	21.3	0	22.5	21.8	22.0	21.9	21.9	0	23
		25	25	21.4	21.5	21.4	21.4	0	22.5	21.8	22.1	22.0	22.0	0	23
		50	0	21.3	21.5	21.4	21.4	0	22.5	21.8	22.1	21.9	21.8	0	23
	64QAM	1	0	21.3	21.3	21.4	21.3	0	22.5	21.6	21.9	22.0	21.9	0	23
		1	25	21.4	21.5	21.5	21.4	0	22.5	21.8	21.9	22.0	22.0	0	23
		1	49	21.4	21.4	21.5	21.3	0	22.5	21.8	22.0	22.1	21.9	0	23
		25	0	21.3	21.5	21.4	21.3	0	22.5	21.9	22.0	21.9	21.9	0.3	22.7
		25	12	21.4	21.4	21.5	21.3	0	22.5	21.9	22.1	22.0	21.9	0.3	22.7
		25	25	21.4	21.4	21.4	21.4	0	22.5	21.9	22.1	22.1	22.0	0.3	22.7
		50	0	21.4	21.4	21.5	21.3	0	22.5	21.9	22.1	22.0	21.9	0.3	22.7
	256QAM	1	0	20.3	20.5	20.5	20.4	1.8	20.7	20.3	20.4	20.5	20.4	2.3	20.7
		1	25	20.4	20.6	20.5	20.5	1.8	20.7	20.4	20.6	20.6	20.6	2.3	20.7
		1	49	20.3	20.5	20.5	20.4	1.8	20.7	20.3	20.5	20.5	20.5	2.3	20.7
		25	0	20.4	20.6	20.5	20.4	1.8	20.7	20.4	20.6	20.5	20.5	2.3	20.7
		25	12	20.5	20.6	20.6	20.4	1.8	20.7	20.5	20.7	20.6	20.5	2.3	20.7
		25	25	20.5	20.7	20.6	20.5	1.8	20.7	20.5	20.7	20.7	20.6	2.3	20.7
		50	0	20.5	20.6	20.5	20.4	1.8	20.7	20.4	20.7	20.5	20.5	2.3	20.7
5 MHz	QPSK	1	0	21.3	21.4	21.4	21.4	0	22.5	21.8	21.9	21.9	21.9	0	23
		1	12	21.5	21.4	21.4	21.4	0	22.5	21.9	22.1	22.0	21.9	0	23
		1	24	21.4	21.5	21.4	21.4	0	22.5	21.8	22.0	22.0	21.9	0	23
		12	0	21.4	21.4	21.4	21.4	0	22.5	21.8	22.0	21.9	21.9	0	23
		12	7	21.4	21.5	21.4	21.5	0	22.5	21.9	22.0	22.0	21.9	0	23
		12	13	21.4	21.4	21.5	21.4	0	22.5	21.8	22.0	22.0	21.9	0	23
		25	0	21.4	21.5	21.4	21.4	0	22.5	21.8	22.0	21.9	21.9	0	23
	16QAM	1	0	21.3	21.4	21.4	21.4	0	22.5	21.8	22.1	21.9	22.0	0	23
		1	12	21.4	21.4	21.5	21.5	0	22.5	22.0	22.1	22.1	22.1	0	23
		1	24	21.5	21.5	21.4	21.5	0	22.5	21.9	22.1	22.0	22.0	0	23
		12	0	21.4	21.4	21.3	21.4	0	22.5	21.7	22.0	21.9	21.9	0	23
		12	7	21.5	21.5	21.4	21.4	0	22.5	21.8	22.0	22.1	21.9	0	23
		12	13	21.5	21.4	21.4	21.4	0	22.5	21.7	22.0	22.0	21.9	0	23
		25	0	21.4	21.5	21.3	21.5	0	22.5	21.8	22.0	21.9	21.9	0	23
	64QAM	1	0	21.3	21.4	21.3	21.5	0	22.5	21.9	21.9	21.9	22.0	0	23
		1	12	21.4	21.5	21.4	21.4	0	22.5	22.0	22.0	22.1	22.0	0	23
		1	24	21.4	21.5	21.4	21.4	0	22.5	21.9	22.0	22.0	22.0	0	23
		12	0	21.4	21.5	21.4	21.5	0	22.5	21.9	22.0	21.9	22.0	0.3	22.7
		12	7	21.4	21.4	21.5	21.5	0	22.5	21.9	22.0	22.0	22.0	0.3	22.7
		12	13	21.4	21.5	21.4	21.5	0	22.5	21.9	22.0	22.0	22.0	0.3	22.7
		25	0	21.4	21.5	21.4	21.5	0	22.5	21.9	22.0	21.9	21.9	0.3	22.7
	256QAM	1	0	20.4	20.4	20.4	20.6	1.8	20.7	20.4	20.4	20.5	20.5	2.3	20.7
		1	12	20.5	20.6	20.6	20.6	1.8	20.7	20.5	20.6	20.6	20.6	2.3	20.7
		1	24	20.4	20.6	20.6	20.6	1.8	20.7	20.5	20.6	20.6	20.5	2.3	20.7
		12	0	20.4	20.6	20.4	20.6	1.8	20.7	20.5	20.6	20.5	20.6	2.3	20.7
		12	7	20.5	20.6	20.6	20.6	1.8	20.7	20.5	20.6	20.6	20.6	2.3	20.7
		12	13	20.5	20.6	20.5	20.6	1.8	20.7	20.5	20.6	20.6	20.6	2.3	20.7
		25	0	20.4	20.6	20.5	20.6	1.8	20.7	20.5	20.6	20.5	20.6	2.3	20.7

LTE Band 48 Measured Results (ANT9)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55340.0	55773.0	56207.0	56640.0	MPR	Tune-up Limit	55340	55773	56207	56640	MPR	Tune-up Limit
				3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz			3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz		
20 MHz	QPSK	1	0	23.5	23.5	23.5	23.3	0	24.3	21.0	21.1	21.2	21.1	0	21.6
		1	49	23.6	23.6	23.7	23.3	0	24.3	21.2	21.2	21.2	21.1	0	21.6
		1	99	23.6	23.6	23.6	23.2	0	24.3	21.1	21.1	21.2	21.1	0	21.6
		50	0	23.6	23.6	23.4	23.4	0	24.3	21.1	21.0	21.1	21.1	0	21.6
		50	24	23.7	23.7	23.7	23.4	0	24.3	21.2	21.1	21.2	21.1	0	21.6
		50	50	23.7	23.7	23.6	23.3	0	24.3	21.0	21.0	21.0	21.0	0	21.6
	16QAM	1	0	23.6	23.6	23.7	23.4	0	24.3	21.2	21.2	21.2	21.1	0	21.6
		1	49	23.3	23.3	23.3	23.1	0	24.3	20.7	20.8	20.9	20.7	0	21.6
		1	99	23.5	23.5	23.4	23.3	0	24.3	20.9	21.0	21.1	20.8	0	21.6
		50	0	23.4	23.4	23.3	23.2	0.3	24	20.8	20.9	20.9	20.8	0	21.6
		50	24	23.4	23.4	23.3	23.2	0.3	24	20.8	20.9	20.9	20.8	0	21.6
		50	50	23.5	23.4	23.4	23.1	0.3	24	20.8	20.9	20.9	20.8	0	21.6
	64QAM	1	0	23.5	23.4	23.3	23.1	0.3	24	20.8	20.9	20.8	20.8	0	21.6
		1	49	23.3	23.2	23.4	23.1	0.3	24	20.7	20.5	20.5	20.5	0	21.6
		1	99	23.4	23.4	23.3	23.2	0.3	24	20.8	20.6	20.6	20.5	0	21.6
		50	0	22.4	22.4	22.3	22.2	1.3	23	20.8	20.6	20.6	20.7	0	21.6
		50	24	22.5	22.5	22.3	22.2	1.3	23	20.8	20.6	20.6	20.7	0	21.6
		50	50	22.5	22.5	22.4	22.2	1.3	23	20.8	20.6	20.7	20.7	0	21.6
	256QAM	1	0	22.4	22.5	22.3	22.2	1.3	23	20.8	20.6	20.6	20.7	0	21.6
		1	49	20.4	20.3	20.2	20.2	3.3	21	19.8	19.5	19.5	19.7	0.6	21
		1	99	20.3	20.3	20.2	20.1	3.3	21	19.9	19.6	19.5	19.6	0.6	21
		50	0	20.5	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	24	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	50	20.5	20.5	20.4	20.2	3.3	21	19.8	19.6	19.7	19.7	0.6	21
15 MHz	QPSK	1	0	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	49	20.4	20.3	20.2	20.1	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	99	20.5	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	0	20.4	20.5	20.3	20.2	3.3	21	19.7	19.6	19.6	19.7	0.6	21
		50	24	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	50	20.5	20.5	20.4	20.2	3.3	21	19.8	19.6	19.7	19.7	0.6	21
	16QAM	1	0	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	49	20.4	20.3	20.2	20.1	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	99	20.5	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	0	20.4	20.5	20.3	20.2	3.3	21	19.7	19.6	19.6	19.7	0.6	21
		50	24	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	50	20.5	20.5	20.4	20.2	3.3	21	19.8	19.6	19.7	19.7	0.6	21
	64QAM	1	0	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	49	20.4	20.3	20.2	20.1	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	99	20.5	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	0	20.4	20.5	20.3	20.2	3.3	21	19.7	19.6	19.6	19.7	0.6	21
		50	24	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	50	20.5	20.5	20.4	20.2	3.3	21	19.8	19.6	19.7	19.7	0.6	21
	256QAM	1	0	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	49	20.4	20.3	20.2	20.1	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		1	99	20.5	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	0	20.4	20.5	20.3	20.2	3.3	21	19.7	19.6	19.6	19.7	0.6	21
		50	24	20.4	20.5	20.3	20.2	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		50	50	20.5	20.5	20.4	20.2	3.3	21	19.8	19.6	19.7	19.7	0.6	21

LTE Band 48 Measured Results (ANT9) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
				55290.0	55757.0	56223.0	56690.0	MFR	Tune-up Limit	55290	55757	56223	56690	MFR	Tune-up Limit
				3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz			3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz		
10 MHz	QPSK	1	0	23.5	22.5	23.3	23.2	0	24.3	20.7	20.9	20.9	20.9	0	21.6
		1	25	23.5	23.5	23.2	23.2	0	24.3	20.8	20.9	20.9	20.9	0	21.6
		1	49	22.9	22.9	23.2	23.2	0	24.3	20.8	20.9	20.9	20.8	0	21.6
		25	0	22.9	22.9	23.3	23.3	0	24.3	20.8	21.0	20.9	20.9	0	21.6
		25	12	23.0	23.0	23.3	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
		25	25	23.0	23.0	23.2	23.3	0	24.3	20.9	21.0	21.0	20.9	0	21.6
		50	0	23.0	23.0	23.2	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
	16QAM	1	0	23.0	22.8	23.2	23.3	0	24.3	20.9	21.1	20.8	21.0	0	21.6
		1	25	23.0	22.8	23.3	23.3	0	24.3	20.9	21.0	20.8	20.9	0	21.6
		1	49	23.0	22.8	23.2	23.2	0	24.3	20.9	21.0	20.8	20.9	0	21.6
		25	0	23.0	23.0	23.3	23.3	0.3	24	20.8	21.0	20.9	20.9	0	21.6
		25	12	23.0	23.0	23.3	23.3	0.3	24	20.9	21.0	20.9	20.9	0	21.6
		25	25	23.0	23.0	23.3	23.3	0.3	24	20.9	21.0	20.9	20.9	0	21.6
		50	0	23.0	23.0	23.2	23.3	0.3	24	20.9	21.0	20.9	20.9	0	21.6
	64QAM	1	0	22.8	22.9	23.2	23.2	0.3	24	20.8	20.8	20.9	20.9	0	21.6
		1	25	22.9	22.9	23.2	23.2	0.3	24	21.0	20.8	21.0	21.0	0	21.6
		1	49	22.8	22.9	23.2	23.1	0.3	24	20.9	20.8	20.9	20.9	0	21.6
		25	0	21.9	22.0	22.2	22.2	1.3	23	21.0	20.8	20.9	20.9	0	21.6
		25	12	21.9	22.0	22.2	22.2	1.3	23	21.0	20.9	20.9	20.9	0	21.6
		25	25	21.9	22.0	22.2	22.2	1.3	23	21.0	20.8	20.9	20.9	0	21.6
		50	0	21.9	22.0	22.2	22.2	1.3	23	21.0	20.8	20.9	20.9	0	21.6
	256QAM	1	0	19.8	19.9	20.1	20.1	3.3	21	19.8	19.7	19.8	19.8	0.6	21
		1	25	19.9	19.9	20.2	20.1	3.3	21	19.9	19.8	19.8	19.8	0.6	21
		1	49	19.8	19.8	20.1	20.0	3.3	21	19.8	19.6	19.7	19.7	0.6	21
		25	0	19.9	19.9	20.2	20.2	3.3	21	20.0	19.8	19.8	19.9	0.6	21
		25	12	19.9	20.0	20.3	20.2	3.3	21	20.0	19.8	19.9	19.9	0.6	21
		25	25	19.9	20.0	20.3	20.2	3.3	21	20.0	19.8	19.9	19.9	0.6	21
		50	0	19.9	20.0	20.3	20.2	3.3	21	20.0	19.8	19.9	19.9	0.6	21
5 MHz	QPSK	1	0	23.3	23.3	23.2	23.2	0	24.3	20.7	20.8	20.8	20.8	0	21.6
		1	12	23.4	23.5	23.2	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
		1	24	23.3	23.4	23.2	23.3	0	24.3	20.8	20.9	20.9	20.9	0	21.6
		12	0	23.4	23.4	23.2	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
		12	7	23.4	23.4	23.3	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
		12	13	23.4	23.4	23.2	23.3	0	24.3	20.9	21.0	20.9	20.9	0	21.6
		25	0	23.4	23.4	23.2	23.3	0	24.3	20.8	21.0	20.9	20.9	0	21.6
	16QAM	1	0	23.3	23.4	23.3	23.3	0	24.3	20.7	20.9	21.0	20.9	0	21.6
		1	12	23.4	23.4	23.5	23.4	0	24.3	20.9	21.0	21.1	21.0	0	21.6
		1	24	23.4	23.4	23.4	23.3	0	24.3	20.8	20.9	21.0	20.9	0	21.6
		12	0	23.4	23.4	23.2	23.3	0.3	24	20.8	21.0	20.9	20.9	0	21.6
		12	7	23.4	23.4	23.2	23.3	0.3	24	20.8	21.0	20.9	20.9	0	21.6
		12	13	23.4	23.4	23.2	23.3	0.3	24	20.8	21.0	20.9	20.9	0	21.6
		25	0	23.4	23.4	23.2	23.3	0.3	24	20.8	21.0	20.8	20.9	0	21.6
	64QAM	1	0	23.3	23.4	23.2	23.3	0.3	24	20.8	20.5	20.5	20.7	0	21.6
		1	12	23.4	23.4	23.3	23.4	0.3	24	20.8	20.6	20.5	20.7	0	21.6
		1	24	23.4	23.4	23.3	23.3	0.3	24	20.8	20.6	20.6	20.7	0	21.6
		12	0	22.4	22.4	22.2	22.3	1.3	23	20.8	20.6	20.6	20.7	0	21.6
		12	7	22.4	22.4	22.2	22.3	1.3	23	20.8	20.7	20.6	20.7	0	21.6
		12	13	22.4	22.4	22.2	22.3	1.3	23	20.8	20.6	20.6	20.7	0	21.6
		25	0	22.4	22.4	22.2	22.3	1.3	23	20.8	20.6	20.6	20.7	0	21.6
	256QAM	1	0	20.3	20.4	20.1	20.2	3.3	21	19.7	19.5	19.5	19.6	0.6	21
		1	12	20.4	20.5	20.2	20.3	3.3	21	19.8	19.6	19.6	19.8	0.6	21
		1	24	20.4	20.5	20.2	20.3	3.3	21	19.8	19.6	19.6	19.6	0.6	21
		12	0	20.4	20.4	20.3	20.3	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		12	7	20.5	20.4	20.3	20.3	3.3	21	19.8	19.7	19.7	19.7	0.6	21
		12	13	20.4	20.4	20.2	20.3	3.3	21	19.8	19.6	19.6	19.7	0.6	21
		25	0	20.4	20.4	20.2	20.3	3.3	21	19.8	19.6	19.6	19.7	0.6	21

LTE Band 48 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode A (dBm)					
				55340	55773	56207	56640	MPR	Tune-up Limit	55340	55773	56207	56640	MPR	Tune-up Limit
				3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz			3560 MHz	3603.3 MHz	3646.7 MHz	3690 MHz		
20 MHz	QPSK	1	0	20.9	21.0	21.1	20.9	0.0	21.8	22.2	22.2	22.1	22.1	0.0	23.0
		1	49	20.9	21.1	21.1	21.0	0.0	21.8	22.3	22.3	22.3	22.3	0.0	23.0
		1	99	20.8	21.0	21.0	20.9	0.0	21.8	22.2	22.2	22.1	22.1	0.0	23.0
		50	0	21.0	21.1	21.1	21.0	0.0	21.8	22.3	22.3	22.4	22.4	0.0	23.0
		50	24	21.1	21.2	21.2	21.1	0.0	21.8	22.4	22.4	22.5	22.5	0.0	23.0
		50	50	21.0	21.1	21.1	21.0	0.0	21.8	22.3	22.3	22.4	22.3	0.0	23.0
	16QAM	100	0	21.0	21.2	21.2	21.0	0.0	21.8	22.4	22.5	22.5	22.4	0.0	23.0
		1	0	20.7	20.7	20.8	20.5	0.0	21.8	22.1	22.1	22.0	21.9	0.0	23.0
		1	49	20.9	20.8	20.9	20.7	0.0	21.8	22.2	22.1	22.3	22.1	0.0	23.0
		1	99	20.8	20.8	20.9	20.6	0.0	21.8	22.1	22.1	22.0	21.9	0.0	23.0
		50	0	20.8	20.8	20.8	20.5	0.0	21.8	22.3	22.3	22.1	22.0	0.0	23.0
		50	24	20.8	20.8	20.8	20.5	0.0	21.8	22.3	22.3	22.1	22.0	0.0	23.0
	64QAM	50	50	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.1	0.0	23.0
		100	0	20.8	20.8	20.8	20.5	0.0	21.8	22.3	22.3	22.3	22.0	0.0	23.0
		1	0	20.9	20.8	20.7	20.5	0.0	21.8	22.1	22.0	22.0	22.1	0.0	23.0
		1	49	21.0	20.9	20.8	20.6	0.0	21.8	22.3	22.0	22.2	22.3	0.0	23.0
		1	99	20.9	20.9	20.7	20.6	0.0	21.8	22.1	22.1	22.1	22.0	0.0	23.0
		50	0	21.0	20.8	20.6	20.7	0.0	21.8	21.3	21.2	21.0	21.2	0.5	22.5
15 MHz	QPSK	50	24	21.0	20.9	20.7	20.7	0.0	21.8	21.3	21.3	21.1	21.2	0.5	22.5
		50	50	21.0	20.9	20.8	20.8	0.0	21.8	21.3	21.3	21.2	21.2	0.5	22.5
		100	0	21.0	20.8	20.7	20.7	0.0	21.8	21.3	21.3	21.1	21.2	0.5	22.5
	16QAM	1	0	19.5	19.3	19.0	19.1	1.3	20.5	19.3	19.3	19.0	19.3	2.5	20.5
		1	49	19.4	19.3	19.1	19.1	1.3	20.5	19.3	19.3	19.2	19.3	2.5	20.5
		1	99	19.4	19.4	19.2	19.1	1.3	20.5	19.3	19.4	19.2	19.3	2.5	20.5
	64QAM	50	0	19.3	19.2	19.0	19.1	1.3	20.5	19.3	19.2	19.0	19.2	2.5	20.5
		50	24	19.4	19.2	19.1	19.1	1.3	20.5	19.3	19.2	19.1	19.2	2.5	20.5
		50	50	19.4	19.3	19.2	19.2	1.3	20.5	19.3	19.2	19.2	19.2	2.5	20.5
	256QAM	100	0	19.4	19.2	19.1	19.1	1.3	20.5	19.3	19.2	19.1	19.2	2.5	20.5
	QPSK	1	0	20.7	20.7	20.7	20.5	0.0	21.8	22.2	22.2	22.0	22.0	0.0	23.0
		1	37	20.7	20.7	20.9	20.5	0.0	21.8	22.3	22.2	22.1	22.1	0.0	23.0
		1	74	20.7	20.7	20.8	20.5	0.0	21.8	22.2	22.2	22.1	22.0	0.0	23.0
		36	0	20.8	20.8	20.8	20.5	0.0	21.8	22.3	22.3	22.1	22.0	0.0	23.0
		36	20	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.1	0.0	23.0
15 MHz	16QAM	36	39	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.1	0.0	23.0
		75	0	20.8	20.7	20.9	20.6	0.0	21.8	22.3	22.3	22.1	22.1	0.0	23.0
		1	0	20.7	20.7	20.7	20.5	0.0	21.8	22.3	22.0	22.0	22.0	0.0	23.0
		1	37	20.9	20.6	21.0	20.7	0.0	21.8	22.3	22.1	22.1	22.2	0.0	23.0
		1	74	20.7	20.6	20.8	20.5	0.0	21.8	22.3	22.1	22.1	22.1	0.0	23.0
		36	0	20.8	20.7	20.8	20.5	0.0	21.8	22.3	22.3	22.1	22.0	0.0	23.0
	64QAM	36	20	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.2	0.0	23.0
		36	39	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.2	0.0	23.0
		75	0	20.8	20.8	20.9	20.6	0.0	21.8	22.3	22.3	22.2	22.2	0.0	23.0
		1	0	20.9	20.7	20.6	20.7	0.0	21.8	22.1	22.0	21.9	22.0	0.0	23.0
		1	37	20.9	20.8	20.7	20.8	0.0	21.8	22.2	22.1	21.9	22.1	0.0	23.0
		1	74	20.9	20.7	20.7	20.7	0.0	21.8	22.2	22.1	22.0	21.9	0.0	23.0
15 MHz	256QAM	36	0	21.0	20.8	20.6	20.7	0.0	21.8	21.3	21.2	21.1	21.2	0.5	22.5
		36	20	21.0	20.9	20.7	20.8	0.0	21.8	21.3	21.2	21.2	21.3	0.5	22.5
		36	39	21.0	20.9	20.8	20.8	0.0	21.8	21.3	21.3	21.2	21.3	0.5	22.5
		75	0	21.0	20.9	20.7	20.8	0.0	21.8	21.3	21.3	21.2	21.3	0.5	22.5
		1	0	19.4	19.3	18.9	19.0	1.3	20.5	19.2	19.2	19.0	19.1	2.5	20.5
		1	37	19.4	19.3	19.0	19.1	1.3	20.5	19.3	19.2	19.2	19.3	2.5	20.5
	QPSK	1	74	19.4	19.3	19.2	19.1	1.3	20.5	19.3	19.3	19.3	19.3	2.5	20.5
		36	0	19.4	19.2	19.0	19.1	1.3	20.5	19.3	19.2	19.1	19.2	2.5	20.5
		36	20	19.4	19.2	19.1	19.2	1.3	20.5	19.3	19.2	19.2	19.3	2.5	20.5
		36	39	19.4	19.3	19.2	19.2	1.3	20.5	19.3	19.3	19.2	19.3	2.5	20.5
		75	0	19.4	19.3	19.2	19.2	1.3	20.5	19.3	19.3	19.2	19.3	2.5	20.5
		75	0	19.4	19.3	19.2	19.2	1.3	20.5	19.3	19.3	19.2	19.3	2.5	20.5

LTE Band 48 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode A (dBm)					
				55290	55757	56223	56690	MFR	Tune-up Limit	55290	55757	56223	56690	MFR	Tune-up Limit
				3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz			3555 MHz	3601.7 MHz	3648.3 MHz	3695 MHz		
10 MHz	QPSK	1	0	20.9	20.8	21.0	20.7	0.0	21.8	22.2	22.2	22.0	22.0	0.0	23.0
		1	25	20.9	20.8	21.0	20.7	0.0	21.8	22.2	22.2	22.0	22.0	0.0	23.0
		1	49	20.8	20.8	20.9	20.7	0.0	21.8	22.2	22.2	22.1	21.9	0.0	23.0
		25	0	20.9	20.9	21.0	20.6	0.0	21.8	22.2	22.2	22.0	21.9	0.0	23.0
		25	12	20.9	20.9	21.0	20.7	0.0	21.8	22.3	22.2	22.1	22.0	0.0	23.0
		25	25	20.9	20.9	21.0	20.7	0.0	21.8	22.3	22.2	22.1	22.1	0.0	23.0
		50	0	20.9	20.9	21.0	20.7	0.0	21.8	22.2	22.2	22.1	22.0	0.0	23.0
	16QAM	1	0	21.0	20.9	20.8	20.7	0.0	21.8	22.3	22.1	21.9	22.0	0.0	23.0
		1	25	21.0	20.9	20.9	20.7	0.0	21.8	22.3	22.1	21.9	22.1	0.0	23.0
		1	49	20.9	21.0	20.9	20.7	0.0	21.8	22.3	22.1	22.0	22.0	0.0	23.0
		25	0	21.0	20.9	21.0	20.7	0.0	21.8	22.2	22.2	22.0	22.0	0.0	23.0
		25	12	21.0	20.9	21.0	20.7	0.0	21.8	22.2	22.2	22.1	22.0	0.0	23.0
		25	25	21.0	20.9	20.9	20.8	0.0	21.8	22.3	22.2	22.1	22.1	0.0	23.0
		50	0	20.9	20.9	21.0	20.7	0.0	21.8	22.3	22.2	22.1	22.0	0.0	23.0
	64QAM	1	0	21.0	21.0	20.9	20.8	0.0	21.8	22.1	21.2	21.9	22.0	0.0	23.0
		1	25	21.0	21.0	21.0	20.8	0.0	21.8	22.2	22.0	21.9	22.1	0.0	23.0
		1	49	21.0	20.9	21.0	20.7	0.0	21.8	22.1	22.0	21.9	22.1	0.0	23.0
		25	0	21.1	21.0	20.8	20.8	0.0	21.8	21.4	21.3	21.2	21.3	0.5	22.5
		25	12	21.1	21.0	20.9	20.8	0.0	21.8	21.5	21.4	21.3	21.3	0.5	22.5
		25	25	21.1	21.0	20.9	20.9	0.0	21.8	21.5	21.3	21.4	21.4	0.5	22.5
		50	0	21.1	21.0	20.9	20.8	0.0	21.8	21.4	21.4	21.3	21.3	0.5	22.5
	256QAM	1	0	19.3	19.2	19.1	19.2	1.3	20.5	19.4	19.3	19.1	19.2	2.5	20.5
		1	25	19.4	19.2	19.3	19.4	1.3	20.5	19.4	19.4	19.2	19.2	2.5	20.5
		1	49	19.3	19.2	19.2	19.3	1.3	20.5	19.4	19.3	19.2	19.2	2.5	20.5
		25	0	19.5	19.4	19.2	19.3	1.3	20.5	19.4	19.3	19.2	19.3	2.5	20.5
		25	12	19.5	19.4	19.3	19.3	1.3	20.5	19.4	19.4	19.3	19.3	2.5	20.5
		25	25	19.5	19.4	19.3	19.3	1.3	20.5	19.4	19.3	19.3	19.4	2.5	20.5
		50	0	19.5	19.4	19.3	19.2	1.3	20.5	19.4	19.4	19.3	19.3	2.5	20.5
5 MHz	QPSK	1	0	20.9	20.8	20.7	20.6	0.0	21.8	22.2	22.1	22.1	22.0	0.0	23.0
		1	12	21.0	20.7	20.8	20.8	0.0	21.8	22.2	22.2	22.2	22.1	0.0	23.0
		1	24	20.9	20.8	20.7	20.7	0.0	21.8	22.2	22.1	22.1	22.0	0.0	23.0
		12	0	21.0	20.7	20.8	20.7	0.0	21.8	22.3	22.2	22.1	22.1	0.0	23.0
		12	7	21.0	20.6	20.8	20.7	0.0	21.8	22.3	22.2	22.2	22.1	0.0	23.0
		12	13	21.0	20.6	20.7	20.7	0.0	21.8	22.2	22.1	22.1	22.1	0.0	23.0
		25	0	21.0	20.7	20.8	20.7	0.0	21.8	22.2	22.1	22.1	22.1	0.0	23.0
	16QAM	1	0	20.9	20.8	20.9	20.7	0.0	21.8	22.2	22.2	22.1	22.1	0.0	23.0
		1	12	21.0	20.8	21.0	20.9	0.0	21.8	22.3	22.4	22.1	22.2	0.0	23.0
		1	24	21.0	20.8	20.9	20.8	0.0	21.8	22.2	22.3	22.1	22.1	0.0	23.0
		12	0	21.0	20.8	20.7	20.8	0.0	21.8	22.2	22.1	22.1	22.0	0.0	23.0
		12	7	21.0	20.7	20.7	20.8	0.0	21.8	22.2	22.1	22.2	22.0	0.0	23.0
		12	13	21.0	20.7	20.7	20.7	0.0	21.8	22.2	22.1	22.1	22.0	0.0	23.0
		25	0	21.0	20.7	20.8	20.7	0.0	21.8	22.2	22.2	22.2	22.1	0.0	23.0
	64QAM	1	0	21.0	20.9	20.7	20.9	0.0	21.8	22.0	22.0	22.0	22.1	0.0	23.0
		1	12	21.0	21.0	20.8	21.0	0.0	21.8	22.1	22.1	22.1	22.1	0.0	23.0
		1	24	21.1	21.0	20.8	21.0	0.0	21.8	22.1	22.1	22.0	22.1	0.0	23.0
		12	0	21.1	21.0	20.9	20.9	0.0	21.8	21.5	21.3	21.3	21.4	0.5	22.5
		12	7	21.0	21.0	20.9	21.0	0.0	21.8	21.5	21.4	21.3	21.5	0.5	22.5
		12	13	21.1	21.0	20.9	20.9	0.0	21.8	21.5	21.4	21.3	21.4	0.5	22.5
		25	0	21.1	21.0	20.9	20.9	0.0	21.8	21.5	21.4	21.3	21.4	0.5	22.5
	256QAM	1	0	19.5	19.4	19.2	19.2	1.3	20.5	19.4	19.3	19.2	19.3	2.5	20.5
		1	12	19.5	19.4	19.3	19.3	1.3	20.5	19.4	19.4	19.2	19.5	2.5	20.5
		1	24	19.5	19.4	19.3	19.2	1.3	20.5	19.4	19.4	19.2	19.4	2.5	20.5
		12	0	19.5	19.3	19.3	19.3	1.3	20.5	19.5	19.4	19.3	19.4	2.5	20.5
		12	7	19.5	19.4	19.3	19.3	1.3	20.5	19.5	19.4	19.4	19.5	2.5	20.5
		12	13	19.5	19.4	19.3	19.3	1.3	20.5	19.5	19.4	19.3	19.4	2.5	20.5
		25	0	19.5	19.4	19.3	19.3	1.3	20.5	19.4	19.4	19.3	19.4	2.5	20.5

LTE Band 53 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				60197		MPR	Tune-up Limit	60197		MPR	Tune-up Limit
				2489.2 MHz				2489.2 MHz			
10 MHz	QPSK	1	0	20.1		0	20.7	20.1		0	20.7
		1	25	20.3		0	20.7	20.3		0	20.7
		1	49	20.1		0	20.7	20.1		0	20.7
		25	0	20.1		0	20.7	20.1		0	20.7
		25	12	20.2		0	20.7	20.2		0	20.7
		25	25	20.1		0	20.7	20.1		0	20.7
	16QAM	50	0	20.1		0	20.7	20.1		0	20.7
		1	0	20.1		0	20.7	20.1		0	20.7
		1	25	20.1		0	20.7	20.1		0	20.7
		1	49	20.2		0	20.7	20.2		0	20.7
		25	0	20.1		0	20.7	20.1		0	20.7
		25	12	20.1		0	20.7	20.1		0	20.7
	64QAM	25	25	20.1		0	20.7	20.1		0	20.7
		50	0	20.1		0	20.7	20.1		0	20.7
		1	0	20.1		0	20.7	20.1		0	20.7
		1	25	20.1		0	20.7	20.1		0	20.7
		1	49	20.1		0	20.7	20.1		0	20.7
		25	0	20.1		0	20.7	20.1		0	20.7
	256QAM	25	12	20.2		0	20.7	20.2		0	20.7
		25	25	20.2		0	20.7	20.2		0	20.7
		50	0	20.1		0	20.7	20.1		0	20.7
		1	0	19.9		0	20.7	19.9		0	20.7
		1	25	19.9		0	20.7	19.9		0	20.7
		1	49	20.0		0	20.7	20.0		0	20.7
5 MHz	QPSK	25	0	20.1		0	20.7	20.1		0	20.7
		25	12	20.1		0	20.7	20.1		0	20.7
		25	25	20.1		0	20.7	20.1		0	20.7
		50	0	20.1		0	20.7	20.1		0	20.7
	16QAM	1	0	20.1		0	20.7	20.1		0	20.7
		1	12	20.0		0	20.7	20.0		0	20.7
		1	24	20.2		0	20.7	20.2		0	20.7
		12	0	20.0		0	20.7	20.0		0	20.7
		12	7	20.0		0	20.7	20.0		0	20.7
		12	13	19.9		0	20.7	19.9		0	20.7
	64QAM	25	0	20.1		0	20.7	20.1		0	20.7
		1	0	20.1		0	20.7	20.1		0	20.7
		1	12	20.1		0	20.7	20.1		0	20.7
		1	24	20.1		0	20.7	20.1		0	20.7
		12	0	20.1		0	20.7	20.1		0	20.7
		12	7	20.1		0	20.7	20.1		0	20.7
	256QAM	12	13	20.0		0	20.7	20.0		0	20.7
		25	0	20.1		0	20.7	20.1		0	20.7
		1	0	20.0		0	20.7	20.0		0	20.7
		1	12	20.1		0	20.7	20.1		0	20.7
		1	24	20.0		0	20.7	20.0		0	20.7
		12	0	20.1		0	20.7	20.1		0	20.7
	256QAM	12	7	20.1		0	20.7	20.1		0	20.7
		12	13	20.0		0	20.7	20.0		0	20.7
		25	0	20.1		0	20.7	20.1		0	20.7
		1	0	20.1		0	20.7	20.1		0	20.7
		1	12	20.1		0	20.7	20.1		0	20.7
		1	24	20.0		0	20.7	20.0		0	20.7

LTE Band 53 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				60155	60197	60240	MPR	Tune-up Limit	60155	60197	60240	MPR	Tune-up Limit
				2485 MHz	2489.2 MHz	2493.5 MHz			2485 MHz	2489.2 MHz	2493.5 MHz		
3 MHz	QPSK	1	0	20.0	20.0	20.0	0	20.7	20.0	20.0	20.0	0	20.7
		1	8	20.2	20.1	20.2	0	20.7	20.2	20.1	20.2	0	20.7
		1	14	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		8	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		8	4	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		8	7	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
	16QAM	15	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		1	0	20.2	20.1	20.0	0	20.7	20.2	20.1	20.0	0	20.7
		1	8	20.0	20.2	20.1	0	20.7	20.0	20.2	20.1	0	20.7
		1	14	20.0	20.1	20.0	0	20.7	20.0	20.1	20.0	0	20.7
		8	0	20.2	20.1	20.0	0	20.7	20.2	20.1	20.0	0	20.7
		8	4	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
	64QAM	8	7	20.2	20.0	20.2	0	20.7	20.2	20.0	20.2	0	20.7
		15	0	20.2	20.1	20.0	0	20.7	20.2	20.1	20.0	0	20.7
		1	0	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		1	8	20.0	20.1	20.2	0	20.7	20.0	20.1	20.2	0	20.7
		1	14	20.2	20.0	20.1	0	20.7	20.2	20.0	20.1	0	20.7
		8	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
	256QAM	8	4	20.1	20.1	20.1	0	20.7	20.1	20.1	20.1	0	20.7
		8	7	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
		15	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	8	20.2	20.1	20.2	0	20.7	20.2	20.1	20.2	0	20.7
		1	14	20.0	20.0	20.1	0	20.7	20.0	20.0	20.1	0	20.7
1.4 MHz	QPSK	8	0	20.2	20.0	20.1	0	20.7	20.2	20.0	20.1	0	20.7
		8	4	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		8	7	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
		15	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	8	20.2	20.1	20.2	0	20.7	20.2	20.1	20.2	0	20.7
	16QAM	1	14	20.0	20.0	20.1	0	20.7	20.0	20.0	20.1	0	20.7
		8	0	20.2	20.0	20.1	0	20.7	20.2	20.0	20.1	0	20.7
		8	4	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		8	7	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
		15	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
	64QAM	1	3	20.0	20.1	20.0	0	20.7	20.0	20.1	20.0	0	20.7
		1	5	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	0	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	1	20.1	20.1	20.1	0	20.7	20.1	20.1	20.1	0	20.7
		3	3	20.2	20.0	20.2	0	20.7	20.2	20.0	20.2	0	20.7
		6	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
	256QAM	1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	3	20.1	20.1	20.2	0	20.7	20.1	20.1	20.2	0	20.7
		1	5	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		3	1	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	3	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
1.4 MHz	QPSK	6	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	3	20.1	20.1	20.2	0	20.7	20.1	20.1	20.2	0	20.7
		1	5	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		3	1	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
	16QAM	3	3	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		6	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	0	20.1	20.1	20.2	0	20.7	20.1	20.1	20.2	0	20.7
		1	3	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		1	5	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
	64QAM	3	1	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		3	3	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
		6	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	0	20.0	20.2	20.0	0	20.7	20.0	20.2	20.0	0	20.7
		1	3	20.0	20.1	20.1	0	20.7	20.0	20.1	20.1	0	20.7
		1	5	20.1	19.8	20.1	0	20.7	20.1	19.8	20.1	0	20.7
	256QAM	3	0	20.2	20.0	20.1	0	20.7	20.2	20.0	20.1	0	20.7
		3	1	20.0	19.9	20.2	0	20.7	20.0	19.9	20.2	0	20.7
		3	3	20.1	20.0	20.2	0	20.7	20.1	20.0	20.2	0	20.7
		6	0	20.2	20.0	20.0	0	20.7	20.2	20.0	20.0	0	20.7
		1	0	20.1	20.0	20.0	0	20.7	20.1	20.0	20.0	0	20.7
		1	3	20.1	20.1	20.2	0	20.7	20.1	20.1	20.2	0	20.7

LTE Band 53 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)								
					60197		MPR	Tune-up Limit		60197		MPR	Tune-up Limit				
					2489.2 MHz					2489.2 MHz							
10 MHz	QPSK	1	0		20.5		0	20.7		20.5		0	20.7				
		1	25		20.5		0	20.7		20.5		0	20.7				
		1	49		20.5		0	20.7		20.5		0	20.7				
		25	0		20.5		0	20.7		20.5		0	20.7				
		25	12		20.6		0	20.7		20.6		0	20.7				
		25	25		20.5		0	20.7		20.5		0	20.7				
		50	0		20.6		0	20.7		20.6		0	20.7				
	16QAM	1	0		20.2		0	20.7		20.2		0	20.7				
		1	25		20.2		0	20.7		20.2		0	20.7				
		1	49		20.3		0	20.7		20.3		0	20.7				
		25	0		20.3		0	20.7		20.3		0	20.7				
		25	12		20.3		0	20.7		20.3		0	20.7				
		25	25		20.3		0	20.7		20.3		0	20.7				
		50	0		20.3		0	20.7		20.3		0	20.7				
	64QAM	1	0		20.3		0	20.7		20.3		0	20.7				
		1	25		20.3		0	20.7		20.3		0	20.7				
		1	49		20.3		0	20.7		20.3		0	20.7				
		25	0		20.2		0	20.7		20.2		0	20.7				
		25	12		20.2		0	20.7		20.2		0	20.7				
		25	25		20.2		0	20.7		20.2		0	20.7				
		50	0		20.2		0	20.7		20.2		0	20.7				
	256QAM	1	0		18.0		2	18.7		18.0		2	18.7				
		1	25		18.1		2	18.7		18.1		2	18.7				
		1	49		18.1		2	18.7		18.1		2	18.7				
25		0		18.2		2	18.7		18.2		2	18.7					
25		12		18.2		2	18.7		18.2		2	18.7					
25		25		18.2		2	18.7		18.2		2	18.7					
50		0		18.2		2	18.7		18.2		2	18.7					
BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)								
5 MHz	QPSK	1	0		60197		MPR	Tune-up Limit		60197		MPR	Tune-up Limit				
					2489.2 MHz					2489.2 MHz							
					20.2				0	20.7				20.2		0	20.7
					20.3				0	20.7				20.3		0	20.7
					20.2				0	20.7				20.2		0	20.7
					20.2				0	20.7				20.2		0	20.7
					20.3				0	20.7				20.3		0	20.7
	16QAM	1	0		20.4		0	20.7		20.4		0	20.7				
					20.5		0	20.7		20.5		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.2		0	20.7		20.2		0	20.7				
	64QAM	1	0		20.2		0	20.7		20.2		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.3		0	20.7		20.3		0	20.7				
					20.1		0	20.7		20.1		0	20.7				
					20.2		0	20.7		20.2		0	20.7				
					20.2		0	20.7		20.2		0	20.7				
					20.2		0	20.7		20.2		0	20.7				
	256QAM	1	0		18.0		2	18.7		18.0		2	18.7				
					18.1		2	18.7		18.1		2	18.7				
					18.0		2	18.7		18.0		2	18.7				
					18.1		2	18.7		18.1		2	18.7				
					18.2		2	18.7		18.2		2	18.7				
					18.1		2	18.7		18.1		2	18.7				
					18.1		2	18.7		18.1		2	18.7				

LTE Band 53 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				60155	60197	60240	MPR	Tune-up Limit	60155	60197	60240	MPR	Tune-up Limit
				2485 MHz	2489.2 MHz	2493.5 MHz			2485 MHz	2489.2 MHz	2493.5 MHz		
3 MHz	QPSK	1	0	20.1	20.1	20.1	0	20.7	20.1	20.1	20.1	0	20.7
		1	8	20.3	20.2	20.3	0	20.7	20.3	20.2	20.3	0	20.7
		1	14	20.1	20.1	20.2	0	20.7	20.1	20.1	20.2	0	20.7
		8	0	20.3	20.2	20.2	0	20.7	20.3	20.2	20.2	0	20.7
		8	4	20.3	20.3	20.3	0	20.7	20.3	20.3	20.3	0	20.7
		8	7	20.3	20.3	20.3	0	20.7	20.3	20.3	20.3	0	20.7
	16QAM	15	0	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		1	0	20.4	20.2	20.1	0	20.7	20.4	20.2	20.1	0	20.7
		1	8	20.3	20.4	20.3	0	20.7	20.3	20.4	20.3	0	20.7
		1	14	20.2	20.3	20.2	0	20.7	20.2	20.3	20.2	0	20.7
		8	0	20.2	20.3	20.2	0	20.7	20.2	20.3	20.2	0	20.7
		8	4	20.2	20.3	20.2	0	20.7	20.2	20.3	20.2	0	20.7
	64QAM	8	7	20.2	20.2	20.3	0	20.7	20.2	20.2	20.3	0	20.7
		15	0	20.1	20.2	20.2	0	20.7	20.1	20.2	20.2	0	20.7
		1	0	20.2	20.1	20.2	0	20.7	20.2	20.1	20.2	0	20.7
		1	8	20.3	20.2	20.4	0	20.7	20.3	20.2	20.4	0	20.7
		1	14	20.2	20.2	20.3	0	20.7	20.2	20.2	20.3	0	20.7
		8	0	20.1	20.2	20.1	0	20.7	20.1	20.2	20.1	0	20.7
	256QAM	8	4	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		8	7	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		15	0	20.2	20.1	20.1	0	20.7	20.2	20.1	20.1	0	20.7
		1	0	18.1	18.1	18.0	2	18.7	18.1	18.1	18.0	2	18.7
		1	8	18.1	18.2	18.1	2	18.7	18.1	18.2	18.1	2	18.7
		1	14	18.0	18.1	18.0	2	18.7	18.0	18.1	18.0	2	18.7
1.4 MHz	QPSK	8	0	18.2	18.1	18.1	2	18.7	18.2	18.1	18.1	2	18.7
		8	4	18.2	18.2	18.2	2	18.7	18.2	18.2	18.2	2	18.7
		8	7	18.2	18.1	18.2	2	18.7	18.2	18.1	18.2	2	18.7
		15	0	18.2	18.1	18.1	2	18.7	18.2	18.1	18.1	2	18.7
	16QAM	1	0	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		1	3	20.2	20.1	20.3	0	20.7	20.2	20.1	20.3	0	20.7
		1	5	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		3	0	20.2	20.3	20.2	0	20.7	20.2	20.3	20.2	0	20.7
		3	1	20.2	20.2	20.3	0	20.7	20.2	20.2	20.3	0	20.7
		3	3	20.3	20.2	20.3	0	20.7	20.3	20.2	20.3	0	20.7
	64QAM	6	0	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		1	0	20.3	20.2	20.2	0	20.7	20.3	20.2	20.2	0	20.7
		1	3	20.4	20.3	20.2	0	20.7	20.4	20.3	20.2	0	20.7
		1	5	20.4	20.3	20.4	0	20.7	20.4	20.3	20.4	0	20.7
		3	0	20.3	20.2	20.4	0	20.7	20.3	20.2	20.4	0	20.7
		3	1	20.3	20.1	20.3	0	20.7	20.3	20.1	20.3	0	20.7
	256QAM	3	3	20.3	20.2	20.2	0	20.7	20.3	20.2	20.2	0	20.7
		6	0	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		1	0	20.1	20.2	20.2	0	20.7	20.1	20.2	20.2	0	20.7
		1	3	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
		1	5	20.1	20.1	20.3	0	20.7	20.1	20.1	20.3	0	20.7
		3	0	20.2	20.2	20.2	0	20.7	20.2	20.2	20.2	0	20.7
1.4 MHz	64QAM	3	1	20.2	20.2	20.3	0	20.7	20.2	20.2	20.3	0	20.7
		3	3	20.2	20.2	20.3	0	20.7	20.2	20.2	20.3	0	20.7
		6	0	20.1	20.0	20.1	0	20.7	20.1	20.0	20.1	0	20.7
	256QAM	1	0	18.2	18.0	18.2	2	18.7	18.2	18.0	18.2	2	18.7
		1	3	18.3	18.1	17.8	2	18.7	18.3	18.1	17.8	2	18.7
		1	5	18.1	18.1	18.1	2	18.7	18.1	18.1	18.1	2	18.7
		3	0	18.1	18.1	18.1	2	18.7	18.1	18.1	18.1	2	18.7
		3	1	18.2	18.1	18.1	2	18.7	18.2	18.1	18.1	2	18.7
		3	3	18.1	18.1	18.2	2	18.7	18.1	18.1	18.2	2	18.7
		6	0	18.0	18.0	18.1	2	18.7	18.0	18.0	18.1	2	18.7

LTE Band 66 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	24.3	24.2	24.1	0	24.8	17.9	17.8	17.7	0	18.1
		1	49	24.3	24.4	24.1	0	24.8	17.9	17.9	17.7	0	18.1
		1	99	24.2	24.1	24.1	0	24.8	17.8	17.7	17.7	0	18.1
		50	0	23.6	23.6	23.5	0.1	24.7	17.9	17.8	17.7	0	18.1
		50	24	23.6	23.6	23.5	0.1	24.7	17.9	17.9	17.7	0	18.1
		50	50	23.5	23.6	23.5	0.1	24.7	17.9	17.8	17.7	0	18.1
	16QAM	100	0	23.6	23.6	23.4	0.1	24.7	17.9	17.8	17.7	0	18.1
		1	0	24.0	24.0	23.8	0.1	24.7	17.8	17.8	17.7	0	18.1
		1	49	24.0	24.2	24.0	0.1	24.7	17.8	17.8	17.8	0	18.1
		1	99	23.8	23.9	23.8	0.1	24.7	17.6	17.7	17.6	0	18.1
		50	0	22.6	22.6	22.5	1.1	23.7	17.5	17.4	17.3	0	18.1
		50	24	22.7	22.6	22.5	1.1	23.7	17.5	17.4	17.3	0	18.1
	64QAM	50	50	22.6	22.6	22.5	1.1	23.7	17.5	17.4	17.3	0	18.1
		100	0	22.7	22.6	22.4	1.1	23.7	17.5	17.4	17.2	0	18.1
		1	0	23.0	23.2	23.2	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	49	23.2	23.2	23.2	1.1	23.7	17.8	17.8	17.9	0	18.1
		1	99	23.1	23.1	23.2	1.1	23.7	17.9	17.8	17.9	0	18.1
		50	0	21.8	21.9	21.9	2.1	22.7	17.6	17.7	17.7	0	18.1
	256QAM	50	24	21.9	22.0	21.9	2.1	22.7	17.7	17.8	17.7	0	18.1
		50	50	21.9	22.0	22.0	2.1	22.7	17.7	17.8	17.8	0	18.1
		100	0	21.9	21.9	21.9	2.1	22.7	17.7	17.7	17.7	0	18.1
		1	0	20.0	20.1	20.0	4.1	20.7	17.8	17.9	17.8	0	18.1
		1	49	20.1	20.3	20.1	4.1	20.7	17.9	17.9	17.9	0	18.1
		1	99	20.1	20.2	20.1	4.1	20.7	17.9	17.9	17.8	0	18.1
15 MHz	QPSK	50	0	19.8	19.9	19.9	4.1	20.7	17.6	17.7	17.7	0	18.1
		50	24	19.9	20.0	19.9	4.1	20.7	17.7	17.8	17.7	0	18.1
		50	50	19.9	20.0	20.0	4.1	20.7	17.7	17.8	17.7	0	18.1
		100	0	19.9	19.9	19.9	4.1	20.7	17.7	17.7	17.7	0	18.1
		1	0	24.3	24.1	24.1	0	24.8	17.5	17.3	17.3	0	18.1
		1	37	24.3	24.2	24.1	0	24.8	17.5	17.4	17.3	0	18.1
	16QAM	1	74	24.2	24.0	24.1	0	24.8	17.3	17.2	17.2	0	18.1
		36	0	23.7	23.5	23.5	0.1	24.7	17.5	17.3	17.2	0	18.1
		36	20	23.7	23.6	23.5	0.1	24.7	17.5	17.4	17.3	0	18.1
		36	39	23.7	23.6	23.5	0.1	24.7	17.4	17.3	17.3	0	18.1
		75	0	23.6	23.6	23.5	0.1	24.7	17.4	17.3	17.3	0	18.1
		1	0	23.9	23.9	23.9	0.1	24.7	17.7	17.6	17.6	0	18.1
	64QAM	1	37	23.9	23.9	23.9	0.1	24.7	17.9	17.7	17.7	0	18.1
		1	74	23.8	23.9	23.8	0.1	24.7	17.6	17.6	17.6	0	18.1
		36	0	22.7	22.5	22.5	1.1	23.7	17.5	17.3	17.3	0	18.1
		36	20	22.7	22.6	22.6	1.1	23.7	17.5	17.4	17.4	0	18.1
		36	39	22.7	22.6	22.5	1.1	23.7	17.5	17.4	17.3	0	18.1
		75	0	22.7	22.6	22.5	1.1	23.7	17.5	17.4	17.3	0	18.1
	256QAM	1	0	22.9	23.0	23.2	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	37	23.0	23.1	23.2	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	74	23.0	23.1	23.2	1.1	23.7	17.8	17.9	17.8	0	18.1
		36	0	21.8	21.9	21.9	2.1	22.7	17.6	17.7	17.7	0	18.1
		36	20	21.9	22.0	21.9	2.1	22.7	17.7	17.8	17.7	0	18.1
		36	39	21.9	22.0	22.0	2.1	22.7	17.7	17.8	17.8	0	18.1
	256QAM	75	0	21.9	21.9	21.9	2.1	22.7	17.7	17.7	17.7	0	18.1
		1	0	19.9	20.0	20.0	4.1	20.7	17.6	17.8	17.8	0	18.1
		1	37	20.0	20.2	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		1	74	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.9	0	18.1
		36	0	19.8	19.9	19.9	4.1	20.7	17.6	17.7	17.7	0	18.1
		36	20	19.9	20.0	19.9	4.1	20.7	17.7	17.8	17.7	0	18.1
	256QAM	36	39	19.9	20.0	20.0	4.1	20.7	17.7	17.7	17.7	0	18.1
		75	0	19.9	19.9	19.9	4.1	20.7	17.7	17.7	17.7	0	18.1

LTE Band 66 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132022	132322	132622	MPR	Tune-up Limit	132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	24.2	24.3	24.2	0	24.8	17.6	17.4	17.3	0	18.1
		1	25	24.2	24.3	24.2	0	24.8	17.5	17.5	17.4	0	18.1
		1	49	24.3	24.2	24.1	0	24.8	17.5	17.4	17.3	0	18.1
		25	0	23.8	23.7	23.6	0.1	24.7	17.6	17.4	17.4	0	18.1
		25	12	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.4	0	18.1
		25	25	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.4	0	18.1
	16QAM	1	0	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.3	0	18.1
		1	25	24.2	24.1	24.0	0.1	24.7	17.9	17.9	17.8	0	18.1
		1	49	24.1	24.1	23.9	0.1	24.7	17.8	17.8	17.7	0	18.1
		25	0	22.9	22.7	22.6	1.1	23.7	17.7	17.4	17.5	0	18.1
		25	12	22.8	22.8	22.6	1.1	23.7	17.6	17.5	17.5	0	18.1
		25	25	22.8	22.8	22.7	1.1	23.7	17.6	17.5	17.5	0	18.1
	64QAM	1	0	22.8	22.7	22.6	1.1	23.7	17.6	17.5	17.4	0	18.1
		1	25	23.1	23.2	23.2	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	49	23.1	23.1	23.2	1.1	23.7	17.8	17.8	17.7	0	18.1
		25	0	21.9	22.0	22.1	2.1	22.7	17.7	17.6	17.8	0	18.1
		25	12	22.0	22.1	22.1	2.1	22.7	17.8	17.8	17.9	0	18.1
		25	25	22.0	22.1	22.1	2.1	22.7	17.8	17.8	17.8	0	18.1
	256QAM	1	0	22.0	22.1	22.0	2.1	22.7	17.8	17.8	17.8	0	18.1
		1	25	20.0	20.1	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		1	49	20.0	20.2	20.0	4.1	20.7	17.9	17.9	17.9	0	18.1
		25	0	19.9	20.0	20.1	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	12	20.0	20.1	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		25	25	20.0	20.1	20.1	4.1	20.7	17.9	17.9	17.9	0	18.1
5 MHz	QPSK	1	0	20.0	20.1	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		1	25	20.0	20.3	20.2	4.1	20.7	17.9	17.9	17.9	0	18.1
		1	49	20.0	20.2	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		25	12	20.0	20.1	20.1	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	25	20.0	20.1	20.1	4.1	20.7	17.7	17.9	17.9	0	18.1
	16QAM	1	0	20.0	20.1	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		1	25	20.0	20.3	20.2	4.1	20.7	17.9	17.9	17.9	0	18.1
		1	49	20.0	20.2	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		25	12	20.0	20.1	20.1	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	25	20.0	20.1	20.1	4.1	20.7	17.7	17.9	17.9	0	18.1
	64QAM	1	0	20.0	20.1	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		1	25	20.0	20.3	20.2	4.1	20.7	17.9	17.9	17.9	0	18.1
		1	49	20.0	20.2	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		25	12	20.0	20.1	20.1	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	25	20.0	20.1	20.1	4.1	20.7	17.7	17.9	17.9	0	18.1
	256QAM	1	0	20.0	20.1	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		1	25	20.0	20.3	20.2	4.1	20.7	17.9	17.9	17.9	0	18.1
		1	49	20.0	20.2	20.0	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		25	12	20.0	20.1	20.1	4.1	20.7	17.8	17.8	17.8	0	18.1
		25	25	20.0	20.1	20.1	4.1	20.7	17.7	17.9	17.9	0	18.1

LTE Band 66 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				131987	132322	132657	MPR	Tune-up Limit	131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	24.3	24.2	24.1	0	24.8	17.5	17.4	17.3	0	18.1
		1	8	24.2	24.3	24.2	0	24.8	17.6	17.5	17.4	0	18.1
		1	14	24.3	24.2	24.1	0	24.8	17.5	17.3	17.3	0	18.1
		8	0	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.4	0	18.1
		8	4	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.4	0	18.1
		8	7	23.8	23.7	23.6	0.1	24.7	17.6	17.5	17.4	0	18.1
	16QAM	15	0	23.8	23.6	23.6	0.1	24.7	17.5	17.5	17.4	0	18.1
		1	0	24.1	24.0	23.9	0.1	24.7	17.9	17.8	17.7	0	18.1
		1	8	24.1	24.1	24.0	0.1	24.7	17.9	17.9	17.8	0	18.1
		1	14	24.0	24.0	23.9	0.1	24.7	17.8	17.7	17.7	0	18.1
		8	0	22.9	22.7	22.7	1.1	23.7	17.6	17.6	17.5	0	18.1
		8	4	22.9	22.8	22.7	1.1	23.7	17.7	17.6	17.5	0	18.1
	64QAM	8	7	22.9	22.8	22.7	1.1	23.7	17.7	17.6	17.5	0	18.1
		15	0	22.8	22.7	22.6	1.1	23.7	17.6	17.5	17.5	0	18.1
		1	0	23.1	23.1	23.2	1.1	23.7	17.9	17.8	17.8	0	18.1
		1	8	23.1	23.2	23.3	1.1	23.7	17.9	17.9	17.9	0	18.1
		1	14	23.1	23.1	23.2	1.1	23.7	17.9	17.8	17.8	0	18.1
		8	0	22.0	22.0	22.1	2.1	22.7	17.7	17.8	17.7	0	18.1
	256QAM	8	4	22.0	22.1	22.1	2.1	22.7	17.7	17.8	17.7	0	18.1
		8	7	22.0	22.1	22.1	2.1	22.7	17.7	17.8	17.7	0	18.1
		15	0	21.9	22.0	22.1	2.1	22.7	17.7	17.9	17.6	0	18.1
		1	0	19.8	20.1	20.2	4.1	20.7	17.7	17.8	17.8	0	18.1
		1	8	20.0	20.2	20.2	4.1	20.7	17.9	17.8	17.8	0	18.1
		1	14	19.9	20.1	20.2	4.1	20.7	17.8	17.7	17.7	0	18.1
1.4 MHz	QPSK	8	0	19.9	20.0	20.0	4.1	20.7	17.7	17.8	17.6	0	18.1
		8	4	19.9	20.1	20.1	4.1	20.7	17.8	17.9	17.7	0	18.1
		8	7	19.9	20.0	20.1	4.1	20.7	17.7	17.9	17.7	0	18.1
		15	0	19.9	20.0	20.0	4.1	20.7	17.7	17.8	17.8	0	18.1
		1	0	24.3	24.2	24.1	0	24.8	17.6	17.4	17.4	0	18.1
		1	3	24.3	24.3	24.2	0	24.8	17.6	17.5	17.4	0	18.1
	16QAM	1	5	24.3	24.3	24.2	0	24.8	17.5	17.5	17.3	0	18.1
		3	0	24.3	24.2	24.1	0	24.8	17.5	17.4	17.3	0	18.1
		3	1	24.3	24.2	24.1	0	24.8	17.5	17.5	17.3	0	18.1
		3	3	24.3	24.3	24.1	0	24.8	17.6	17.5	17.3	0	18.1
		6	0	23.7	23.6	23.5	0.1	24.7	17.5	17.4	17.3	0	18.1
		1	0	23.9	24.0	23.9	0.1	24.7	17.7	17.8	17.7	0	18.1
	64QAM	1	3	24.0	24.0	24.0	0.1	24.7	17.8	17.9	17.8	0	18.1
		1	5	23.9	23.9	23.9	0.1	24.7	17.8	17.8	17.7	0	18.1
		3	0	23.9	23.8	23.8	0.1	24.7	17.8	17.6	17.6	0	18.1
		3	1	23.9	23.8	23.7	0.1	24.7	17.8	17.7	17.6	0	18.1
		3	3	23.9	23.8	23.7	0.1	24.7	17.7	17.6	17.6	0	18.1
		6	0	22.8	22.7	22.6	1.1	23.7	17.6	17.5	17.5	0	18.1
	256QAM	1	0	22.9	23.2	23.2	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	3	23.0	23.2	23.3	1.1	23.7	17.8	17.8	17.8	0	18.1
		1	5	22.9	23.2	23.2	1.1	23.7	17.8	17.9	17.8	0	18.1
		3	0	22.9	23.1	23.1	1.1	23.7	17.8	17.8	17.8	0	18.1
		3	1	23.0	23.1	23.1	1.1	23.7	17.8	17.9	17.8	0	18.1
		3	3	22.9	23.1	23.1	1.1	23.7	17.8	17.9	17.8	0	18.1
	256QAM	6	0	21.9	22.0	22.1	2.1	22.7	17.7	17.8	17.8	0	18.1
		1	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		1	3	20.0	20.1	20.1	4.1	20.7	17.9	17.9	17.8	0	18.1
		1	5	20.0	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		3	0	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.9	0	18.1
		3	1	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.9	0	18.1
	256QAM	3	3	19.9	20.0	20.1	4.1	20.7	17.7	17.8	17.8	0	18.1
		6	0	19.8	20.1	20.1	4.1	20.7	17.6	17.7	17.7	0	18.1

LTE Band 66 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	20.7	20.8	20.7	0	21	21.1	21.1	21.1	0	21.3
		1	49	20.9	20.9	20.7	0	21	21.3	21.3	21.2	0	21.3
		1	99	20.8	20.8	20.7	0	21	21.0	21.1	21.1	0	21.3
		50	0	20.8	20.8	20.7	0	21	21.1	21.1	21.1	0	21.3
		50	24	20.9	20.9	20.8	0	21	21.3	21.3	21.1	0	21.3
		50	50	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
	16QAM	100	0	20.8	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		1	0	20.7	20.6	20.8	0	21	21.1	21.2	21.0	0	21.3
		1	49	20.8	20.8	20.9	0	21	21.2	21.2	21.2	0	21.3
		1	99	20.7	20.6	20.8	0	21	21.0	21.2	21.1	0	21.3
		50	0	20.8	20.8	20.8	0	21	21.1	21.1	21.0	0	21.3
		50	24	20.8	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
	64QAM	50	50	20.8	20.8	20.7	0	21	21.1	21.1	21.1	0	21.3
		100	0	20.8	20.8	20.8	0	21	21.1	21.2	21.1	0	21.3
		1	0	20.8	20.8	20.7	0	21	21.1	21.2	21.1	0	21.3
		1	49	20.9	20.9	20.8	0	21	21.2	21.1	21.1	0	21.3
		1	99	20.7	20.8	20.7	0	21	21.1	21.1	21.1	0	21.3
		50	0	20.9	20.9	20.7	0	21	21.1	21.1	21.0	0	21.3
	256QAM	50	24	21.0	20.9	20.8	0	21	21.2	21.2	21.0	0	21.3
		50	50	21.0	20.9	20.8	0	21	21.2	21.1	21.0	0	21.3
		100	0	21.0	20.9	20.8	0	21	21.2	21.1	21.0	0	21.3
		1	0	19.5	19.5	19.6	1.3	19.7	19.1	19.3	19.1	1.6	19.7
		1	49	19.5	19.5	19.6	1.3	19.7	19.2	19.4	19.3	1.6	19.7
		1	99	19.4	19.5	19.5	1.3	19.7	19.3	19.3	19.1	1.6	19.7
15 MHz	QPSK	50	0	19.4	19.3	19.2	1.3	19.7	19.1	19.1	18.9	1.6	19.7
		50	24	19.5	19.4	19.3	1.3	19.7	19.2	19.2	19.0	1.6	19.7
		50	50	19.5	19.4	19.3	1.3	19.7	19.2	19.1	19.0	1.6	19.7
		100	0	19.5	19.4	19.3	1.3	19.7	19.2	19.1	19.0	1.6	19.7
	16QAM	1	0	20.8	20.9	20.8	0	21	21.0	21.2	21.2	0	21.3
		1	37	20.9	20.9	20.8	0	21	21.1	21.2	21.2	0	21.3
		1	74	20.8	20.8	20.8	0	21	21.0	21.1	21.1	0	21.3
		36	0	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
		36	20	20.9	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		36	39	20.9	20.9	20.9	0	21	21.1	21.2	21.2	0	21.3
	64QAM	75	0	20.9	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		1	0	20.8	20.8	20.7	0	21	21.2	21.2	21.2	0	21.3
		1	37	20.8	20.9	20.8	0	21	21.1	21.2	21.2	0	21.3
		1	74	20.7	20.7	20.7	0	21	21.1	21.1	21.2	0	21.3
		36	0	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
		36	20	20.9	20.9	20.8	0	21	21.2	21.2	21.1	0	21.3
	256QAM	36	39	20.9	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		75	0	20.9	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		1	0	20.8	20.6	20.7	0	21	21.1	21.1	21.0	0	21.3
		1	37	20.9	20.7	20.8	0	21	21.1	21.2	21.0	0	21.3
		1	74	20.9	20.7	20.7	0	21	21.2	21.1	21.0	0	21.3
		36	0	20.7	20.6	20.5	0	21	21.2	21.1	21.0	0	21.3
15 MHz	64QAM	36	20	20.7	20.6	20.5	0	21	21.2	21.1	21.0	0	21.3
		36	39	20.7	20.6	20.5	0	21	21.2	21.1	21.0	0	21.3
		75	0	20.7	20.6	20.5	0	21	21.2	21.1	21.0	0	21.3
	256QAM	1	0	19.6	19.4	19.3	1.3	19.7	19.3	19.1	19.1	1.6	19.7
		1	37	19.5	19.5	19.5	1.3	19.7	19.4	19.3	19.2	1.6	19.7
		1	74	19.5	19.4	19.5	1.3	19.7	19.3	19.2	19.2	1.6	19.7
	256QAM	36	0	19.5	19.4	19.3	1.3	19.7	19.2	19.0	19.0	1.6	19.7
		36	20	19.5	19.4	19.3	1.3	19.7	19.2	19.1	19.0	1.6	19.7
		36	39	19.4	19.4	19.3	1.3	19.7	19.2	19.1	19.0	1.6	19.7
		75	0	19.5	19.4	19.3	1.3	19.7	19.2	19.1	19.0	1.6	19.7

LTE Band 66 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132022	132322	132622	MPR	Tune-up Limit	132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	20.7	20.8	20.8	0	21	21.0	21.1	21.0	0	21.3
		1	25	20.8	20.9	20.8	0	21	21.1	21.1	21.1	0	21.3
		1	49	20.7	20.8	20.7	0	21	21.0	21.0	21.0	0	21.3
		25	0	20.7	20.8	20.8	0	21	21.1	21.1	21.0	0	21.3
		25	12	20.9	20.9	20.8	0	21	21.1	21.2	21.1	0	21.3
		25	25	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
	16QAM	1	0	20.9	20.8	20.8	0	21	21.1	21.1	21.0	0	21.3
		1	25	20.9	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
		1	49	20.8	20.9	20.9	0	21	21.0	21.0	21.1	0	21.3
		25	0	20.6	20.7	20.7	0	21	21.1	21.1	21.1	0	21.3
		25	12	20.7	20.7	20.7	0	21	21.2	21.2	21.1	0	21.3
		25	25	20.7	20.7	20.7	0	21	21.1	21.2	21.1	0	21.3
	64QAM	1	0	20.7	20.7	20.6	0	21	21.1	21.1	21.0	0	21.3
		1	25	20.8	20.9	20.7	0	21	21.1	21.2	21.1	0	21.3
		1	49	20.9	20.8	20.7	0	21	21.1	21.1	21.0	0	21.3
		25	0	20.7	20.7	20.6	0	21	21.1	21.1	20.9	0	21.3
		25	12	20.8	20.7	20.6	0	21	21.2	21.1	21.0	0	21.3
		25	25	20.8	20.7	20.6	0	21	21.1	21.0	21.0	0	21.3
	256QAM	1	0	20.8	20.7	20.5	0	21	21.2	21.0	20.9	0	21.3
		1	0	19.6	19.6	19.5	1.3	19.7	19.1	19.0	19.0	1.6	19.7
		1	25	19.7	19.7	19.7	1.3	19.7	19.3	19.1	19.1	1.6	19.7
		1	49	19.7	19.7	19.6	1.3	19.7	19.2	19.0	19.0	1.6	19.7
		25	0	19.6	19.6	19.5	1.3	19.7	19.1	19.1	18.9	1.6	19.7
		25	12	19.6	19.6	19.5	1.3	19.7	19.2	19.0	19.0	1.6	19.7
5 MHz	QPSK	25	25	19.7	19.6	19.5	1.3	19.7	19.2	19.0	19.0	1.6	19.7
		50	0	19.6	19.6	19.5	1.3	19.7	19.1	19.0	18.9	1.6	19.7
	16QAM	1	0	131997	132322	132647	MPR	Tune-up Limit	131997	132322	132647	MPR	Tune-up Limit
		1	25	1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz		
		1	0	20.7	20.8	20.8	0	21	21.0	21.0	21.1	0	21.3
		1	12	20.8	20.9	20.8	0	21	21.0	21.1	21.1	0	21.3
		1	24	20.8	20.8	20.8	0	21	21.0	21.1	21.0	0	21.3
		12	0	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
	16QAM	12	7	20.8	20.9	20.8	0	21	21.1	21.1	21.1	0	21.3
		12	13	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
		25	0	20.8	20.8	20.8	0	21	21.1	21.1	21.1	0	21.3
		1	0	20.7	20.9	20.8	0	21	21.1	21.1	21.1	0	21.3
		1	12	20.8	20.9	20.8	0	21	21.2	21.2	21.1	0	21.3
		1	24	20.7	20.9	20.8	0	21	21.2	21.2	21.0	0	21.3
	64QAM	12	0	20.8	20.9	20.9	0	21	21.2	21.2	21.1	0	21.3
		12	7	20.8	20.9	20.9	0	21	21.2	21.1	21.1	0	21.3
		12	13	20.8	20.9	20.8	0	21	21.2	21.1	21.1	0	21.3
		25	0	20.8	20.9	20.8	0	21	21.1	21.1	21.1	0	21.3
		1	0	20.8	20.7	20.6	0	21	21.2	21.0	21.1	0	21.3
		1	12	20.9	20.8	20.7	0	21	21.2	21.1	21.1	0	21.3
	256QAM	1	24	20.9	20.7	20.7	0	21	21.2	21.1	21.1	0	21.3
		12	0	20.7	20.6	20.6	0	21	21.1	21.0	21.0	0	21.3
		12	7	20.8	20.7	20.6	0	21	21.1	21.1	21.0	0	21.3
		12	13	20.7	20.6	20.6	0	21	21.1	21.0	21.0	0	21.3
		25	0	20.7	20.6	20.6	0	21	21.1	21.0	21.0	0	21.3
		1	0	19.5	19.5	19.4	1.3	19.7	19.3	19.2	19.2	1.6	19.7
	256QAM	1	12	19.5	19.6	19.4	1.3	19.7	19.4	19.3	19.2	1.6	19.7
		1	24	19.5	19.5	19.4	1.3	19.7	19.4	19.2	19.2	1.6	19.7
		12	0	19.5	19.4	19.4	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		12	7	19.6	19.5	19.4	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		12	13	19.5	19.4	19.4	1.3	19.7	19.3	19.1	19.1	1.6	19.7
		25	0	19.5	19.4	19.3	1.3	19.7	19.3	19.2	19.1	1.6	19.7

LTE Band 66 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				131987	132322	132657	MPR	Tune-up Limit	131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	20.6	20.5	20.6	0	21	21.0	21.0	21.0	0	21.3
		1	8	20.7	20.7	20.7	0	21	21.0	21.1	21.1	0	21.3
		1	14	20.6	20.6	20.5	0	21	21.1	21.0	21.0	0	21.3
		8	0	20.7	20.7	20.6	0	21	21.1	21.1	21.0	0	21.3
		8	4	20.7	20.7	20.7	0	21	21.1	21.1	21.1	0	21.3
		8	7	20.7	20.7	20.7	0	21	21.0	21.1	21.1	0	21.3
	16QAM	15	0	20.6	20.6	20.6	0	21	21.2	21.0	21.1	0	21.3
		1	0	20.6	20.8	20.8	0	21	21.2	21.2	21.1	0	21.3
		1	8	20.8	20.9	20.8	0	21	21.1	21.2	21.2	0	21.3
		1	14	20.6	20.8	20.7	0	21	21.1	21.2	21.1	0	21.3
		8	0	20.7	20.7	20.7	0	21	21.1	21.1	21.1	0	21.3
		8	4	20.7	20.7	20.7	0	21	21.1	21.1	21.2	0	21.3
	64QAM	8	7	20.7	20.7	20.7	0	21	21.1	21.2	21.1	0	21.3
		15	0	20.6	20.7	20.7	0	21	21.1	21.1	21.1	0	21.3
		1	0	20.8	20.7	20.6	0	21	21.1	21.1	21.0	0	21.3
		1	8	20.9	20.8	20.6	0	21	21.2	21.2	21.1	0	21.3
		1	14	20.8	20.7	20.5	0	21	21.2	21.1	21.1	0	21.3
		8	0	20.7	20.6	20.5	0	21	21.1	21.0	21.0	0	21.3
	256QAM	8	4	20.7	20.7	20.6	0	21	21.1	21.1	21.0	0	21.3
		8	7	20.7	20.6	20.5	0	21	21.1	21.1	20.9	0	21.3
		15	0	20.7	20.6	20.5	0	21	21.1	21.0	20.9	0	21.3
		1	0	19.4	19.3	19.3	1.3	19.7	19.4	19.2	19.1	1.6	19.7
		1	8	19.4	19.3	19.3	1.3	19.7	19.4	19.3	19.2	1.6	19.7
		1	14	19.3	19.3	19.2	1.3	19.7	19.3	19.2	19.0	1.6	19.7
1.4 MHz	QPSK	8	0	19.3	19.2	19.1	1.3	19.7	19.2	19.1	19.1	1.6	19.7
		8	4	19.3	19.2	19.2	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		8	7	19.3	19.2	19.2	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		15	0	19.3	19.2	19.1	1.3	19.7	19.3	19.2	19.1	1.6	19.7
	16QAM	1	0	20.7	20.7	20.7	0	21	21.0	21.0	21.0	0	21.3
		1	3	20.7	20.8	20.8	0	21	21.0	21.0	21.0	0	21.3
		1	5	20.7	20.7	20.7	0	21	21.0	21.0	21.0	0	21.3
		3	0	20.7	20.8	20.7	0	21	21.0	21.0	21.0	0	21.3
		3	1	20.7	20.8	20.7	0	21	21.0	21.0	21.0	0	21.3
		3	3	20.7	20.8	20.7	0	21	21.0	21.0	21.0	0	21.3
	64QAM	6	0	20.8	20.7	20.7	0	21	21.0	21.0	21.0	0	21.3
		1	0	20.6	20.7	20.7	0	21	21.2	21.1	21.2	0	21.3
		1	3	20.6	20.8	20.8	0	21	21.2	21.2	21.2	0	21.3
		1	5	20.6	20.7	20.7	0	21	21.2	21.1	21.2	0	21.3
		3	0	20.7	20.7	20.7	0	21	21.2	21.1	21.1	0	21.3
		3	1	20.7	20.8	20.7	0	21	21.1	21.2	21.1	0	21.3
	256QAM	3	3	20.7	20.7	20.8	0	21	21.1	21.2	21.1	0	21.3
		6	0	20.7	20.6	20.7	0	21	21.0	21.1	21.1	0	21.3
		1	0	20.7	20.7	20.4	0	21	21.2	21.1	21.0	0	21.3
		1	3	20.8	20.7	20.5	0	21	21.2	21.2	21.0	0	21.3
		1	5	20.8	20.7	20.4	0	21	21.2	21.1	21.0	0	21.3
		3	0	20.7	20.6	20.5	0	21	21.2	21.0	20.9	0	21.3
1.4 MHz	64QAM	3	1	20.7	20.6	20.6	0	21	21.2	21.0	20.9	0	21.3
		3	3	20.7	20.6	20.6	0	21	21.2	21.1	20.9	0	21.3
		6	0	20.6	20.6	20.3	0	21	21.0	21.0	20.9	0	21.3
	256QAM	1	0	19.4	19.2	19.2	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		1	3	19.4	19.1	19.1	1.3	19.7	19.3	19.3	19.2	1.6	19.7
		1	5	19.4	19.2	19.1	1.3	19.7	19.3	19.2	19.2	1.6	19.7
	256QAM	3	0	19.3	19.1	19.0	1.3	19.7	19.4	19.2	19.0	1.6	19.7
		3	1	19.3	19.2	19.0	1.3	19.7	19.3	19.2	19.1	1.6	19.7
		3	3	19.4	19.1	19.1	1.3	19.7	19.4	19.2	19.0	1.6	19.7
		6	0	19.3	19.3	19.0	1.3	19.7	19.1	19.1	19.1	1.6	19.7

LTE Band 66 Measured Results (ANT3)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	25.0	24.8	24.9	0	25.5	21.0	20.9	21.0	0	21.5
		1	49	25.1	25.2	25.1	0	25.5	21.1	21.2	21.1	0	21.5
		1	99	25.0	24.9	25.0	0	25.5	21.0	21.0	21.1	0	21.5
		50	0	24.1	23.8	24.0	1	24.5	21.1	20.9	21.1	0	21.5
		50	24	24.1	24.2	24.1	1	24.5	21.1	21.2	21.1	0	21.5
		50	50	24.0	23.8	24.1	1	24.5	21.1	21.0	21.0	0	21.5
	16QAM	100	0	24.0	24.1	24.0	1	24.5	21.0	21.0	21.0	0	21.5
		1	0	23.7	23.8	24.0	1	24.5	20.9	20.7	20.7	0	21.5
		1	49	24.0	24.0	24.0	1	24.5	20.9	21.0	21.0	0	21.5
		1	99	23.8	23.9	24.1	1	24.5	20.8	20.7	20.8	0	21.5
		50	0	23.0	22.8	23.0	2	23.5	20.9	20.8	20.9	0	21.5
		50	24	23.0	22.8	23.0	2	23.5	20.9	20.8	20.9	0	21.5
	64QAM	50	50	23.0	22.9	23.1	2	23.5	20.9	20.8	21.0	0	21.5
		100	0	23.0	22.8	23.0	2	23.5	20.9	20.8	20.9	0	21.5
		1	0	22.9	22.9	23.0	2	23.5	20.5	20.4	20.6	0	21.5
		1	49	23.0	23.1	23.1	2	23.5	20.5	20.5	20.8	0	21.5
		1	99	22.9	23.0	23.0	2	23.5	20.4	20.5	20.6	0	21.5
		50	0	21.7	21.7	21.8	3	22.5	20.2	20.2	20.4	0	21.5
	256QAM	50	24	21.8	21.7	21.9	3	22.5	20.3	20.3	20.5	0	21.5
		50	50	21.8	21.7	21.9	3	22.5	20.3	20.3	20.5	0	21.5
		100	0	21.8	21.7	21.8	3	22.5	20.3	20.3	20.4	0	21.5
		1	0	19.9	19.8	19.9	5	20.5	19.8	19.9	20.0	1	20.5
		1	49	20.0	20.0	20.1	5	20.5	19.9	20.0	20.2	1	20.5
		1	99	19.9	20.0	20.0	5	20.5	19.9	20.0	20.1	1	20.5
15 MHz	QPSK	50	0	19.7	19.7	19.9	5	20.5	19.7	19.7	19.9	1	20.5
		50	24	19.8	19.8	20.0	5	20.5	19.8	19.8	20.0	1	20.5
		50	50	19.8	19.8	19.9	5	20.5	19.8	19.8	20.0	1	20.5
		100	0	19.8	19.8	19.9	5	20.5	19.8	19.8	19.9	1	20.5
	16QAM	1	0	24.9	24.8	25.0	0	25.5	20.9	20.7	20.9	0	21.5
		1	37	25.0	24.9	25.1	0	25.5	20.9	20.7	20.9	0	21.5
		1	74	24.9	24.8	25.1	0	25.5	20.8	20.7	20.9	0	21.5
		36	0	24.0	23.8	24.0	1	24.5	20.9	20.7	20.9	0	21.5
		36	20	24.0	23.9	24.1	1	24.5	20.9	20.8	21.0	0	21.5
		36	39	24.0	23.9	24.1	1	24.5	20.9	20.8	21.0	0	21.5
	64QAM	75	0	24.0	23.9	24.0	1	24.5	20.9	20.7	20.9	0	21.5
		1	0	24.0	23.9	24.1	1	24.5	20.8	20.7	20.8	0	21.5
		1	37	24.1	23.9	24.1	1	24.5	20.8	20.7	20.9	0	21.5
		1	74	24.0	22.6	24.1	1	24.5	20.7	20.6	20.8	0	21.5
		36	0	23.1	22.9	23.0	2	23.5	20.7	20.6	20.7	0	21.5
		36	20	23.1	22.9	23.1	2	23.5	20.7	20.6	20.8	0	21.5
	256QAM	36	39	23.0	22.9	23.1	2	23.5	20.7	20.6	20.8	0	21.5
		75	0	23.1	22.9	23.0	2	23.5	20.7	20.6	20.7	0	21.5
		1	0	22.9	22.8	23.1	2	23.5	20.3	20.2	20.4	0	21.5
		1	37	22.9	22.9	23.2	2	23.5	20.4	20.3	20.4	0	21.5
		1	74	22.9	22.9	23.1	2	23.5	20.2	20.2	20.4	0	21.5
		36	0	21.7	21.6	21.8	3	22.5	20.0	20.0	20.2	0	21.5
15 MHz	64QAM	36	20	21.8	21.7	21.9	3	22.5	20.1	20.1	20.2	0	21.5
		36	39	21.7	21.7	21.9	3	22.5	20.1	20.1	20.3	0	21.5
		75	0	21.8	21.7	21.9	3	22.5	20.1	20.1	20.2	0	21.5
	256QAM	1	0	19.7	19.8	19.9	5	20.5	19.6	19.6	19.8	1	20.5
		1	37	19.9	20.0	20.1	5	20.5	19.7	19.8	20.0	1	20.5
		1	74	19.8	19.9	20.0	5	20.5	19.6	19.7	19.9	1	20.5
	256QAM	36	0	19.7	19.7	19.9	5	20.5	19.5	19.5	19.7	1	20.5
		36	20	19.8	19.8	19.9	5	20.5	19.6	19.6	19.7	1	20.5
		36	39	19.7	19.8	20.0	5	20.5	19.6	19.6	19.8	1	20.5
		75	0	19.7	19.8	19.9	5	20.5	19.6	19.6	19.7	1	20.5

LTE Band 66 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132022	132322	132622	MPR	Tune-up Limit	132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	25.1	24.8	25.1	0	25.5	21.0	20.7	21.0	0	21.5
		1	25	25.1	24.8	25.1	0	25.5	21.0	20.8	21.1	0	21.5
		1	49	25.1	24.8	25.1	0	25.5	20.9	20.8	21.0	0	21.5
		25	0	24.2	23.9	24.0	1	24.5	21.1	20.9	21.0	0	21.5
		25	12	24.2	23.9	24.0	1	24.5	21.1	20.9	21.0	0	21.5
		25	25	24.1	23.9	24.1	1	24.5	21.0	20.9	21.1	0	21.5
	16QAM	1	0	24.2	23.9	24.0	1	24.5	21.0	20.9	21.0	0	21.5
		1	25	24.3	23.9	24.1	1	24.5	20.9	20.8	21.0	0	21.5
		1	49	24.2	24.0	24.2	1	24.5	20.9	20.9	21.0	0	21.5
		25	0	23.2	23.0	23.1	2	23.5	20.9	20.7	20.9	0	21.5
		25	12	23.1	23.0	23.1	2	23.5	20.9	20.7	20.9	0	21.5
		25	25	23.2	23.0	23.2	2	23.5	20.9	20.7	20.9	0	21.5
	64QAM	1	0	23.2	23.0	23.1	2	23.5	20.8	20.7	20.9	0	21.5
		1	25	23.0	22.9	23.1	2	23.5	20.4	20.3	20.6	0	21.5
		1	49	23.0	22.9	23.1	2	23.5	20.4	20.3	20.5	0	21.5
		25	0	21.8	21.8	22.0	3	22.5	20.2	20.1	20.4	0	21.5
		25	12	21.9	21.9	22.0	3	22.5	20.3	20.3	20.4	0	21.5
		25	25	21.9	21.8	22.1	3	22.5	20.3	20.2	20.4	0	21.5
	256QAM	1	0	21.9	21.8	22.0	3	22.5	20.3	20.2	20.3	0	21.5
		1	0	19.9	19.9	20.1	5	20.5	19.8	19.7	19.9	1	20.5
		1	25	20.1	20.0	20.2	5	20.5	19.9	19.8	20.0	1	20.5
		1	49	20.0	20.0	20.1	5	20.5	19.8	19.8	19.9	1	20.5
		25	0	19.8	19.8	20.0	5	20.5	19.7	19.6	19.8	1	20.5
		25	12	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
5 MHz	QPSK	25	25	19.9	19.9	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		50	0	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
	16QAM	1	0	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
		1	25	20.1	20.0	20.2	5	20.5	19.9	19.8	20.0	1	20.5
		1	49	20.0	20.0	20.1	5	20.5	19.8	19.8	19.9	1	20.5
		25	0	19.8	19.8	20.0	5	20.5	19.7	19.6	19.8	1	20.5
	64QAM	25	12	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
		25	25	19.9	19.9	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		50	0	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
	256QAM	1	0	19.9	19.9	20.0	5	20.5	19.8	19.7	19.8	1	20.5
		1	12	20.0	19.9	20.2	5	20.5	19.8	19.8	20.1	1	20.5
		1	24	20.0	19.9	20.2	5	20.5	19.8	19.8	20.1	1	20.5
		12	0	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
		12	7	19.9	19.9	20.1	5	20.5	19.8	19.7	19.9	1	20.5
		12	13	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
	QPSK	25	0	19.9	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		1	0	25.0	24.8	25.0	0	25.5	21.0	20.8	21.0	0	21.5
		1	12	25.1	24.9	25.2	0	25.5	21.1	20.9	21.1	0	21.5
		1	24	25.0	24.9	25.1	0	25.5	21.0	20.8	21.0	0	21.5
		12	0	24.0	23.9	24.1	1	24.5	21.0	20.8	21.1	0	21.5
		12	7	24.1	23.9	24.1	1	24.5	21.0	20.8	21.1	0	21.5
5 MHz	16QAM	12	13	24.0	23.9	24.1	1	24.5	21.0	20.8	21.0	0	21.5
		25	0	24.0	23.8	24.1	1	24.5	21.0	20.8	21.0	0	21.5
		1	0	23.1	24.0	24.3	1	24.5	21.1	20.7	21.0	0	21.5
		1	12	24.4	24.1	24.3	1	24.5	21.0	20.7	21.1	0	21.5
		1	24	24.1	23.9	24.2	1	24.5	20.9	20.8	21.0	0	21.5
		12	0	23.1	23.0	23.1	2	23.5	20.9	20.6	20.9	0	21.5
	64QAM	12	7	23.1	23.0	23.1	2	23.5	20.9	20.7	21.0	0	21.5
		12	13	23.1	23.0	23.1	2	23.5	20.9	20.6	20.9	0	21.5
		25	0	23.0	22.9	23.1	2	23.5	20.8	20.6	20.9	0	21.5
		1	0	23.0	22.9	23.3	2	23.5	20.4	20.2	20.5	0	21.5
		1	12	23.0	22.9	23.2	2	23.5	20.4	20.3	20.5	0	21.5
		1	24	23.0	22.9	23.2	2	23.5	20.4	20.2	20.5	0	21.5
5 MHz	256QAM	12	0	21.9	21.8	22.1	3	22.5	20.2	20.2	20.4	0	21.5
		12	7	21.9	21.9	22.1	3	22.5	20.2	20.2	20.4	0	21.5
		12	13	21.8	21.9	22.0	3	22.5	20.2	20.2	20.4	0	21.5
		25	0	21.8	21.8	22.0	3	22.5	20.2	20.2	20.4	0	21.5
		1	0	19.9	19.9	20.2	5	20.5	19.8	19.7	20.1	1	20.5
		1	12	20.0	19.9	20.2	5	20.5	19.8	19.8	20.1	1	20.5
	QPSK	1	24	20.0	19.9	20.2	5	20.5	19.8	19.8	20.1	1	20.5
		12	0	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
		12	7	19.9	19.9	20.1	5	20.5	19.8	19.7	19.9	1	20.5
		12	13	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
		25	0	19.9	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		50	0	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5

LTE Band 66 Measured Results (ANT3) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				131987	132322	132657	MPR	Tune-up Limit	131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	24.9	24.7	24.9	0	25.5	20.9	20.9	20.8	0	21.5
		1	8	25.0	24.9	25.1	0	25.5	21.0	21.0	20.9	0	21.5
		1	14	24.9	24.8	24.9	0	25.5	20.9	21.0	20.8	0	21.5
		8	0	24.0	23.8	24.1	1	24.5	21.0	21.0	21.0	0	21.5
		8	4	24.0	23.9	24.1	1	24.5	21.0	21.0	21.0	0	21.5
		8	7	24.0	23.9	24.1	1	24.5	21.0	20.9	20.9	0	21.5
	16QAM	15	0	24.0	23.8	24.1	1	24.5	21.0	20.9	20.9	0	21.5
		1	0	24.1	23.7	24.1	1	24.5	20.8	20.8	20.9	0	21.5
		1	8	24.2	24.0	24.2	1	24.5	20.9	20.9	21.0	0	21.5
		1	14	24.1	23.8	24.2	1	24.5	20.7	20.8	20.8	0	21.5
		8	0	23.2	23.1	23.1	2	23.5	20.9	20.8	20.9	0	21.5
		8	4	23.2	22.9	23.2	2	23.5	20.9	20.8	20.9	0	21.5
	64QAM	8	7	23.1	22.9	23.1	2	23.5	20.8	20.8	20.9	0	21.5
		15	0	23.0	22.9	23.1	2	23.5	20.8	20.8	20.8	0	21.5
		1	0	23.0	22.9	23.2	2	23.5	20.2	20.3	20.5	0	21.5
		1	8	23.1	22.9	23.2	2	23.5	20.3	20.3	20.6	0	21.5
		1	14	23.0	22.8	23.1	2	23.5	20.2	20.3	20.5	0	21.5
		8	0	21.9	21.8	22.0	3	22.5	20.2	20.2	20.4	0	21.5
	256QAM	8	4	21.9	21.8	22.1	3	22.5	20.2	20.2	20.4	0	21.5
		8	7	21.9	21.8	22.0	3	22.5	20.3	20.2	20.4	0	21.5
		15	0	21.8	21.8	22.0	3	22.5	20.2	20.1	20.4	0	21.5
		1	0	19.9	19.8	20.1	5	20.5	19.7	19.7	20.0	1	20.5
		1	8	20.0	19.9	20.2	5	20.5	19.8	19.9	20.1	1	20.5
		1	14	19.9	19.9	20.1	5	20.5	19.7	19.8	20.0	1	20.5
1.4 MHz	QPSK	8	0	19.9	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
		8	4	19.9	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		8	7	19.9	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		15	0	19.8	19.8	20.0	5	20.5	19.7	19.7	19.9	1	20.5
	16QAM	1	0	25.0	24.8	25.0	0	25.5	20.8	20.6	20.9	0	21.5
		1	3	25.0	24.8	25.1	0	25.5	20.9	20.7	20.9	0	21.5
		1	5	25.0	24.8	25.1	0	25.5	20.8	20.7	20.9	0	21.5
		3	0	25.0	24.8	25.1	0	25.5	20.8	20.7	20.9	0	21.5
		3	1	25.0	24.8	25.1	0	25.5	20.9	20.7	20.9	0	21.5
		3	3	25.0	24.8	25.0	0	25.5	20.9	20.7	20.9	0	21.5
	64QAM	6	0	24.0	23.8	24.0	1	24.5	20.8	20.7	20.9	0	21.5
		1	0	24.0	23.9	24.0	1	24.5	20.9	20.8	20.9	0	21.5
		1	3	24.1	24.0	24.0	1	24.5	21.0	20.8	21.0	0	21.5
		1	5	24.1	23.9	24.0	1	24.5	20.9	20.9	21.0	0	21.5
		3	0	24.2	24.0	24.2	1	24.5	21.0	20.8	21.1	0	21.5
		3	1	24.2	24.0	24.2	1	24.5	21.1	20.9	21.1	0	21.5
	256QAM	3	3	24.2	24.0	24.2	1	24.5	21.0	20.9	21.0	0	21.5
		6	0	23.1	22.9	23.1	2	23.5	20.9	20.7	21.0	0	21.5
		1	0	22.9	23.0	23.1	2	23.5	20.3	20.3	20.4	0	21.5
		1	3	22.9	23.0	23.1	2	23.5	20.3	20.3	20.5	0	21.5
		1	5	22.8	22.9	23.2	2	23.5	20.3	20.2	20.4	0	21.5
		3	0	22.8	22.8	23.1	2	23.5	20.2	20.2	20.5	0	21.5
1.4 MHz	64QAM	3	1	22.8	22.9	23.1	2	23.5	20.2	20.3	20.4	0	21.5
		3	3	22.8	22.9	23.1	2	23.5	20.3	20.2	20.4	0	21.5
		6	0	21.7	21.7	22.1	3	22.5	20.1	20.2	20.2	0	21.5
	256QAM	1	0	19.8	19.9	20.2	5	20.5	19.8	19.8	19.9	1	20.5
		1	3	19.9	19.9	20.2	5	20.5	19.8	19.8	20.0	1	20.5
		1	5	19.8	19.9	20.2	5	20.5	19.8	19.7	19.9	1	20.5
		3	0	19.8	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		3	1	19.8	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		3	3	19.8	19.8	20.1	5	20.5	19.7	19.7	19.9	1	20.5
		6	0	19.9	19.7	19.9	5	20.5	19.5	19.7	19.7	1	20.5

LTE Band 66 Measured Results (ANT4)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	18.4	18.4	18.4	0	19.1	18.9	18.8	18.8	0	19.3
		1	49	18.5	18.5	18.5	0	19.1	19.0	19.1	18.9	0	19.3
		1	99	18.3	18.4	18.4	0	19.1	18.8	18.8	18.9	0	19.3
		50	0	18.4	18.4	18.4	0	19.1	18.9	18.8	18.9	0	19.3
		50	24	18.5	18.5	18.5	0	19.1	18.9	19.0	19.0	0	19.3
		50	50	18.4	18.3	18.2	0	19.1	18.9	18.8	18.9	0	19.3
	16QAM	100	0	18.4	18.5	18.4	0	19.1	18.8	18.9	18.9	0	19.3
		1	0	18.3	18.1	18.1	0	19.1	18.9	18.9	18.8	0	19.3
		1	49	18.4	18.3	18.3	0	19.1	19.0	18.9	19.0	0	19.3
		1	99	18.2	18.1	18.2	0	19.1	18.8	18.7	18.9	0	19.3
		50	0	18.1	18.0	18.1	0	19.1	18.5	18.4	18.4	0	19.3
		50	24	18.2	18.0	18.2	0	19.1	18.5	18.4	18.5	0	19.3
	64QAM	50	50	18.1	18.0	18.2	0	19.1	18.5	18.4	18.5	0	19.3
		100	0	18.1	18.0	18.1	0	19.1	18.5	18.4	18.4	0	19.3
		1	0	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		1	49	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		1	99	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		50	0	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
	256QAM	50	24	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		50	50	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		100	0	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0	19.3
		1	0	18.2	18.1	18.0	0	19.1	18.8	18.7	18.7	0.1	19.2
		1	49	18.2	18.0	18.0	0	19.1	18.8	18.2	18.7	0.1	19.2
		1	99	18.2	18.0	18.0	0	19.1	18.8	18.3	18.7	0.1	19.2
15 MHz	QPSK	50	0	18.2	18.0	18.0	0	19.1	18.8	18.3	18.7	0.1	19.2
		50	24	18.2	18.0	18.0	0	19.1	18.8	18.2	18.7	0.1	19.2
		50	50	18.2	18.0	18.0	0	19.1	18.8	18.2	18.7	0.1	19.2
		100	0	18.2	18.0	18.0	0	19.1	18.8	18.3	18.7	0.1	19.2
	16QAM	1	0	18.2	18.1	18.2	0	19.1	18.9	18.8	19.0	0	19.3
		1	37	18.2	18.1	18.3	0	19.1	18.9	18.9	19.0	0	19.3
		1	74	18.1	18.0	18.2	0	19.1	18.9	18.7	18.9	0	19.3
		36	0	18.2	18.1	18.2	0	19.1	18.9	18.8	18.9	0	19.3
		36	20	18.2	18.1	18.2	0	19.1	18.9	18.8	18.9	0	19.3
		36	39	18.2	18.0	18.2	0	19.1	18.9	18.8	19.0	0	19.3
	64QAM	75	0	18.2	18.0	18.2	0	19.1	18.9	18.8	18.9	0	19.3
		1	0	18.2	18.2	18.4	0	19.1	18.9	18.8	18.9	0	19.3
		1	37	18.3	18.2	18.4	0	19.1	18.9	18.8	18.9	0	19.3
		1	74	18.1	18.1	18.3	0	19.1	18.8	18.7	18.8	0	19.3
		36	0	18.0	17.9	17.9	0	19.1	18.5	18.4	18.5	0	19.3
		36	20	18.0	17.8	18.0	0	19.1	18.5	18.4	18.5	0	19.3
	256QAM	36	39	18.0	17.8	18.0	0	19.1	18.5	18.4	18.5	0	19.3
		75	0	18.0	17.8	17.9	0	19.1	18.5	18.4	18.5	0	19.3
		1	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0	19.3
		1	37	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0	19.3
		1	74	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0	19.3
		36	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0	19.3
15 MHz	QPSK	36	20	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0	19.3
		36	39	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0	19.3
		75	0	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0	19.3
	16QAM	1	0	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	37	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	74	18.2	17.9	17.9	0	19.1	18.7	18.7	18.7	0.1	19.2
		36	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		36	20	18.1	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		36	39	18.1	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
	64QAM	75	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		1	0	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	37	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	74	18.2	17.9	17.9	0	19.1	18.7	18.7	18.7	0.1	19.2
		36	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		36	20	18.1	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
	256QAM	36	39	18.1	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		75	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2
		1	0	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	37	18.2	17.9	17.9	0	19.1	18.5	18.7	18.7	0.1	19.2
		1	74	18.2	17.9	17.9	0	19.1	18.7	18.7	18.7	0.1	19.2
		36	0	18.2	17.9	17.9	0	19.1	18.8	18.7	18.7	0.1	19.2

LTE Band 66 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				132022	132322	132622	MPR	Tune-up Limit	132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	18.3	18.1	18.3	0	19.1	19.0	18.9	19.0	0	19.3
		1	25	18.3	18.1	18.3	0	19.1	19.0	18.9	19.1	0	19.3
		1	49	18.2	18.1	18.2	0	19.1	18.9	18.8	19.0	0	19.3
		25	0	18.3	18.1	18.3	0	19.1	19.1	18.9	19.0	0	19.3
		25	12	18.3	18.1	18.3	0	19.1	19.1	18.9	19.0	0	19.3
		25	25	18.3	18.2	18.4	0	19.1	19.0	18.9	19.1	0	19.3
	16QAM	50	0	18.3	18.2	18.3	0	19.1	19.1	18.9	19.0	0	19.3
		1	0	18.3	18.2	18.3	0	19.1	18.9	18.8	18.9	0	19.3
		1	25	18.2	18.2	18.4	0	19.1	18.9	18.8	18.9	0	19.3
		1	49	18.2	18.2	18.3	0	19.1	18.8	18.7	18.8	0	19.3
		25	0	18.1	18.0	18.1	0	19.1	18.7	18.5	18.6	0	19.3
		25	12	18.1	17.9	18.1	0	19.1	18.7	18.5	18.6	0	19.3
	64QAM	25	25	18.1	17.9	18.1	0	19.1	18.7	18.5	18.7	0	19.3
		50	0	18.1	17.9	18.0	0	19.1	18.6	18.5	18.6	0	19.3
		1	0	18.1	18.3	18.3	0	19.1	18.6	18.8	18.8	0	19.3
		1	25	18.1	18.3	18.3	0	19.1	18.6	18.8	18.8	0	19.3
		1	49	18.1	18.3	18.3	0	19.1	18.6	18.8	18.8	0	19.3
		25	0	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0	19.3
	256QAM	25	12	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0	19.3
		25	25	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0	19.3
		50	0	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0	19.3
		1	0	18.2	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
		1	25	18.2	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
		1	49	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
5 MHz	QPSK	25	0	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
		25	12	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
		25	25	18.1	17.9	18.3	0	19.1	18.5	18.8	18.9	0.1	19.2
		50	0	18.1	17.9	18.3	0	19.1	18.5	18.8	18.8	0.1	19.2
		1	0	18.3	18.1	18.3	0	19.1	19.0	18.9	19.0	0	19.3
		1	12	18.3	18.1	18.3	0	19.1	19.0	18.9	19.0	0	19.3
	16QAM	1	24	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		12	0	18.3	18.1	18.4	0	19.1	19.0	18.9	19.1	0	19.3
		12	7	18.3	18.2	18.3	0	19.1	19.1	18.9	19.1	0	19.3
		12	13	18.3	18.1	18.3	0	19.1	19.0	18.9	19.1	0	19.3
		25	0	18.3	18.2	18.3	0	19.1	19.0	18.9	19.1	0	19.3
		1	0	18.1	18.0	18.2	0	19.1	19.0	18.7	19.0	0	19.3
	64QAM	1	12	18.1	18.0	18.2	0	19.1	19.0	18.9	19.0	0	19.3
		1	24	18.1	18.0	18.2	0	19.1	19.0	18.7	19.0	0	19.3
		12	0	17.9	17.7	17.8	0	19.1	18.7	18.5	18.7	0	19.3
		12	7	17.9	17.7	17.8	0	19.1	18.7	18.5	18.7	0	19.3
		12	13	17.9	17.7	17.8	0	19.1	18.7	18.5	18.6	0	19.3
		25	0	17.9	17.7	17.9	0	19.1	18.6	18.5	18.7	0	19.3
	256QAM	1	0	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0	19.3
		1	12	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0	19.3
		1	24	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0	19.3
		12	0	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0	19.3
		12	7	18.1	18.0	18.1	0	19.1	18.9	18.8	18.9	0	19.3
		12	13	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0	19.3
		25	0	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0	19.3
		1	0	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0.1	19.2
		1	12	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0.1	19.2
		1	24	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0.1	19.2
		12	0	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0.1	19.2
		12	7	18.2	18.0	18.1	0	19.1	19.0	18.8	18.9	0.1	19.2
		12	13	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0.1	19.2
		25	0	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0.1	19.2
		1	0	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0.1	19.2
		1	12	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0.1	19.2

LTE Band 66 Measured Results (ANT4) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				131987	132322	132657	MPR	Tune-up Limit	131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		1	8	18.4	18.2	18.4	0	19.1	19.1	18.9	19.1	0	19.3
		1	14	18.3	18.1	18.3	0	19.1	18.9	18.8	19.0	0	19.3
		8	0	18.3	18.2	18.4	0	19.1	19.0	18.9	19.0	0	19.3
		8	4	18.4	18.2	18.4	0	19.1	19.0	18.9	19.1	0	19.3
		8	7	18.4	18.2	18.4	0	19.1	19.0	18.9	19.1	0	19.3
	16QAM	15	0	18.3	18.2	18.4	0	19.1	19.0	18.9	19.0	0	19.3
		1	0	18.1	18.0	18.1	0	19.1	18.9	18.7	18.8	0	19.3
		1	8	18.1	18.1	18.2	0	19.1	19.0	18.8	18.9	0	19.3
		1	14	18.0	17.9	18.1	0	19.1	18.8	18.7	18.8	0	19.3
		8	0	17.8	17.7	17.9	0	19.1	18.7	18.5	18.7	0	19.3
		8	4	17.9	17.7	18.0	0	19.1	18.7	18.5	18.7	0	19.3
	64QAM	8	7	17.8	17.7	17.9	0	19.1	18.7	18.5	18.7	0	19.3
		15	0	17.8	17.7	17.9	0	19.1	18.6	18.5	18.6	0	19.3
		1	0	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0	19.3
		1	8	18.2	18.0	18.1	0	19.1	18.9	18.8	18.9	0	19.3
		1	14	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0	19.3
		8	0	18.1	18.0	18.0	0	19.1	18.9	18.8	18.8	0	19.3
	256QAM	8	4	18.1	18.0	18.1	0	19.1	18.9	18.8	18.8	0	19.3
		8	7	18.2	18.0	18.0	0	19.1	18.9	18.8	18.8	0	19.3
		15	0	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0	19.3
		1	0	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0.1	19.2
		1	8	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0.1	19.2
		1	14	18.2	18.0	18.0	0	19.1	19.0	18.8	18.8	0.1	19.2
1.4 MHz	QPSK	8	0	18.2	18.0	18.0	0	19.1	18.9	18.8	18.8	0.1	19.2
		8	4	18.2	18.0	18.1	0	19.1	18.9	18.8	18.8	0.1	19.2
		8	7	18.2	18.0	18.0	0	19.1	18.9	18.8	18.8	0.1	19.2
		15	0	18.1	18.0	18.0	0	19.1	18.9	18.8	18.8	0.1	19.2
	16QAM	1	0	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		1	3	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		1	5	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		3	0	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		3	1	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		3	3	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
	16QAM	6	0	18.3	18.1	18.3	0	19.1	19.0	18.8	19.0	0	19.3
		1	0	18.0	17.8	18.1	0	19.1	18.9	18.6	18.9	0	19.3
		1	3	18.1	17.8	18.1	0	19.1	18.9	18.6	18.9	0	19.3
		1	5	18.0	17.9	18.1	0	19.1	18.8	18.6	18.9	0	19.3
		3	0	17.9	17.8	17.9	0	19.1	18.7	18.5	18.7	0	19.3
		3	1	18.0	17.8	18.0	0	19.1	18.7	18.5	18.7	0	19.3
	64QAM	3	3	17.9	17.8	17.9	0	19.1	18.7	18.5	18.7	0	19.3
		6	0	17.9	17.7	17.8	0	19.1	18.6	18.5	18.7	0	19.3
		1	0	18.1	17.9	18.1	0	19.1	18.9	18.6	18.8	0	19.3
		1	3	18.1	18.0	18.0	0	19.1	19.0	18.7	18.8	0	19.3
		1	5	18.1	18.0	18.0	0	19.1	18.9	18.7	18.8	0	19.3
		3	0	18.1	18.0	18.1	0	19.1	18.9	18.7	18.8	0	19.3
	256QAM	3	1	18.1	18.0	18.1	0	19.1	18.9	18.7	18.8	0	19.3
		3	3	18.1	18.0	18.1	0	19.1	18.9	18.8	18.8	0	19.3
		6	0	18.1	18.0	18.0	0	19.1	18.9	18.8	18.8	0	19.3
		1	0	18.1	18.0	18.1	0	19.1	18.9	18.8	18.7	0.1	19.2
		1	3	18.1	18.0	18.1	0	19.1	18.9	18.8	18.8	0.1	19.2
		1	5	18.1	18.0	18.1	0	19.1	18.9	18.8	18.7	0.1	19.2
	256QAM	3	0	18.1	18.0	18.1	0	19.1	18.9	18.8	18.7	0.1	19.2
		3	1	18.1	18.0	18.0	0	19.1	18.9	18.8	18.8	0.1	19.2
		3	3	18.1	18.0	18.1	0	19.1	18.9	18.8	18.7	0.1	19.2
		6	0	18.1	18.0	18.1	0	19.1	18.9	18.8	18.8	0.1	19.2

LTE Band 71 Measured Results (ANT1)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				133297	MPR	Tune-up Limit		133297	MPR	Tune-up Limit	
				680.5 MHz				680.5 MHz			
20 MHz	QPSK	1	0	25.1	0	25.7		25.1	0	25.7	
		1	49	25.2	0	25.7		25.2	0	25.7	
		1	99	25.0	0	25.7		25.0	0	25.7	
		50	0	24.1	1	24.7		24.1	1	24.7	
		50	24	24.1	1	24.7		24.1	1	24.7	
		50	50	24.0	1	24.7		24.0	1	24.7	
	16QAM	100	0	24.1	1	24.7		24.1	1	24.7	
		1	0	24.4	1	24.7		24.4	1	24.7	
		1	49	24.4	1	24.7		24.4	1	24.7	
		1	99	24.3	1	24.7		24.3	1	24.7	
		50	0	23.1	2	23.7		23.1	2	23.7	
		50	24	23.1	2	23.7		23.1	2	23.7	
	64QAM	50	50	23.0	2	23.7		23.0	2	23.7	
		100	0	23.1	2	23.7		23.1	2	23.7	
		1	0	23.6	2	23.7		23.6	2	23.7	
		1	49	23.6	2	23.7		23.6	2	23.7	
		1	99	23.3	2	23.7		23.3	2	23.7	
		50	0	22.4	3	22.7		22.4	3	22.7	
	256QAM	50	24	22.4	3	22.7		22.4	3	22.7	
		50	50	22.3	3	22.7		22.3	3	22.7	
		100	0	22.4	3	22.7		22.4	3	22.7	
		1	0	20.6	5	20.7		20.6	5	20.7	
		1	49	20.6	5	20.7		20.6	5	20.7	
		1	99	20.4	5	20.7		20.4	5	20.7	
15 MHz	QPSK	50	0	20.4	5	20.7		20.4	5	20.7	
		50	24	20.3	5	20.7		20.3	5	20.7	
		100	0	20.4	5	20.7		20.4	5	20.7	
	16QAM	1	0	25.1	0	25.7		25.1	0	25.7	
		1	37	25.1	0	25.7		25.1	0	25.7	
		1	74	25.0	0	25.7		25.0	0	25.7	
	64QAM	36	0	24.0	1	24.7		24.0	1	24.7	
		36	20	24.1	1	24.7		24.1	1	24.7	
		36	39	24.0	1	24.7		24.0	1	24.7	
	256QAM	75	0	24.1	1	24.7		24.1	1	24.7	
		1	0	24.3	1	24.7		24.3	1	24.7	
		1	37	24.3	1	24.7		24.3	1	24.7	
	16QAM	1	74	24.3	1	24.7		24.3	1	24.7	
		36	0	23.1	2	23.7		23.1	2	23.7	
		36	20	23.1	2	23.7		23.1	2	23.7	
	64QAM	36	39	23.1	2	23.7		23.1	2	23.7	
		75	0	23.1	2	23.7		23.1	2	23.7	
	256QAM	1	0	23.7	2	23.7		23.7	2	23.7	
		1	37	23.6	2	23.7		23.6	2	23.7	
		1	74	23.5	2	23.7		23.5	2	23.7	
	16QAM	36	0	22.4	3	22.7		22.4	3	22.7	
		36	20	22.4	3	22.7		22.4	3	22.7	
		36	39	22.3	3	22.7		22.3	3	22.7	
	64QAM	75	0	22.4	3	22.7		22.4	3	22.7	
		1	0	20.5	5	20.7		20.5	5	20.7	
		1	37	20.5	5	20.7		20.5	5	20.7	
	256QAM	1	74	20.4	5	20.7		20.4	5	20.7	
		36	0	20.4	5	20.7		20.4	5	20.7	
		36	20	20.4	5	20.7		20.4	5	20.7	
		36	39	20.4	5	20.7		20.4	5	20.7	
		75	0	20.4	5	20.7		20.4	5	20.7	

LTE Band 71 Measured Results (ANT1) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
				133172	133297	133422	MPR	Tune-up Limit	133172	133297	133422	MPR	Tune-up Limit
				668 MHz	680.5 MHz	693 MHz			668 MHz	680.5 MHz	693 MHz		
10 MHz	QPSK	1	0	25.4	25.3	25.2	0	25.7	25.4	25.3	25.2	0	25.7
		1	25	25.3	25.3	25.3	0	25.7	25.3	25.3	25.3	0	25.7
		1	49	25.3	25.2	25.2	0	25.7	25.3	25.2	25.2	0	25.7
		25	0	24.4	24.2	24.2	1	24.7	24.4	24.2	24.2	1	24.7
		25	12	24.3	24.3	24.2	1	24.7	24.3	24.3	24.2	1	24.7
		25	25	24.3	24.2	24.2	1	24.7	24.3	24.2	24.2	1	24.7
	16QAM	1	0	24.3	24.2	24.1	1	24.7	24.3	24.2	24.1	1	24.7
		1	25	24.7	24.7	24.6	1	24.7	24.7	24.7	24.6	1	24.7
		1	25	24.6	24.6	24.6	1	24.7	24.6	24.6	24.6	1	24.7
		1	49	24.6	24.6	24.5	1	24.7	24.6	24.6	24.5	1	24.7
		25	0	23.4	23.2	23.2	2	23.7	23.4	23.2	23.2	2	23.7
		25	12	23.4	23.2	23.2	2	23.7	23.4	23.2	23.2	2	23.7
	64QAM	25	25	23.4	23.2	23.2	2	23.7	23.4	23.2	23.2	2	23.7
		50	0	23.4	23.2	23.2	2	23.7	23.4	23.2	23.2	2	23.7
		1	0	23.7	23.6	23.6	2	23.7	23.7	23.6	23.6	2	23.7
		1	25	23.6	23.6	23.6	2	23.7	23.6	23.6	23.6	2	23.7
		1	49	23.5	23.5	23.5	2	23.7	23.5	23.5	23.5	2	23.7
		25	0	22.6	22.4	22.4	3	22.7	22.6	22.4	22.4	3	22.7
	256QAM	25	12	22.7	22.5	22.3	3	22.7	22.7	22.5	22.3	3	22.7
		25	25	22.6	22.4	22.3	3	22.7	22.6	22.4	22.3	3	22.7
		50	0	22.7	22.5	22.3	3	22.7	22.7	22.5	22.3	3	22.7
		1	0	20.7	20.6	20.5	5	20.7	20.7	20.6	20.5	5	20.7
		1	25	20.6	20.7	20.6	5	20.7	20.6	20.7	20.6	5	20.7
		1	49	20.6	20.5	20.4	5	20.7	20.6	20.5	20.4	5	20.7
5 MHz	QPSK	25	0	20.6	20.4	20.3	5	20.7	20.6	20.4	20.3	5	20.7
		25	12	20.7	20.5	20.3	5	20.7	20.7	20.5	20.3	5	20.7
		25	25	20.6	20.5	20.3	5	20.7	20.6	20.5	20.3	5	20.7
		50	0	20.7	20.5	20.3	5	20.7	20.7	20.5	20.3	5	20.7
	16QAM	1	0	25.4	25.2	25.2	0	25.7	25.4	25.2	25.2	0	25.7
		1	12	25.4	25.3	25.3	0	25.7	25.4	25.3	25.3	0	25.7
		1	24	25.3	25.1	25.1	0	25.7	25.3	25.1	25.1	0	25.7
		12	0	24.4	24.2	24.2	1	24.7	24.4	24.2	24.2	1	24.7
		12	7	24.4	24.3	24.2	1	24.7	24.4	24.3	24.2	1	24.7
		12	13	24.3	24.2	24.2	1	24.7	24.3	24.2	24.2	1	24.7
	64QAM	25	0	24.3	24.2	24.2	1	24.7	24.3	24.2	24.2	1	24.7
		1	0	24.7	24.6	24.5	1	24.7	24.7	24.6	24.5	1	24.7
		1	12	24.7	24.7	24.7	1	24.7	24.7	24.7	24.7	1	24.7
		1	24	24.7	24.6	24.5	1	24.7	24.7	24.6	24.5	1	24.7
		12	0	23.4	23.2	23.3	2	23.7	23.4	23.2	23.3	2	23.7
		12	7	23.4	23.3	23.3	2	23.7	23.4	23.3	23.3	2	23.7
	256QAM	12	13	23.4	23.3	23.3	2	23.7	23.4	23.3	23.3	2	23.7
		25	0	23.4	23.2	23.2	2	23.7	23.4	23.2	23.2	2	23.7
		1	0	23.7	23.6	23.5	2	23.7	23.7	23.6	23.5	2	23.7
		1	12	23.7	23.7	23.5	2	23.7	23.7	23.7	23.5	2	23.7
		1	24	23.6	23.5	23.3	2	23.7	23.6	23.5	23.3	2	23.7
		12	0	22.6	22.6	22.3	3	22.7	22.6	22.6	22.3	3	22.7
5 MHz	64QAM	12	7	22.7	22.5	22.4	3	22.7	22.7	22.5	22.4	3	22.7
		12	13	22.7	22.5	22.3	3	22.7	22.7	22.5	22.3	3	22.7
		25	0	22.7	22.5	22.3	3	22.7	22.7	22.5	22.3	3	22.7
	256QAM	1	0	20.7	20.7	20.4	5	20.7	20.7	20.7	20.4	5	20.7
		1	12	20.7	20.7	20.4	5	20.7	20.7	20.7	20.4	5	20.7
		1	24	20.7	20.6	20.3	5	20.7	20.7	20.6	20.3	5	20.7
		12	0	20.6	20.5	20.3	5	20.7	20.6	20.5	20.3	5	20.7
		12	7	20.7	20.5	20.3	5	20.7	20.7	20.5	20.3	5	20.7
		12	13	20.7	20.5	20.3	5	20.7	20.7	20.5	20.3	5	20.7
	256QAM	25	0	20.7	20.5	20.3	5	20.7	20.7	20.5	20.3	5	20.7

LTE Band 71 Measured Results (ANT2)

BW (MHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
				133297	MPR	Tune-up Limit		133297	MPR	Tune-up Limit	
				680.5 MHz				680.5 MHz			
20 MHz	QPSK	1	0	24.3	0	24.7		24.3	0	24.7	
		1	49	24.4	0	24.7		24.4	0	24.7	
		1	99	24.2	0	24.7		24.2	0	24.7	
		50	0	23.2	1	23.7		23.2	1	23.7	
		50	24	23.4	1	23.7		23.4	1	23.7	
		50	50	23.2	1	23.7		23.2	1	23.7	
	16QAM	100	0	23.4	1	23.7		23.4	1	23.7	
		1	0	23.2	1	23.7		23.2	1	23.7	
		1	49	23.3	1	23.7		23.3	1	23.7	
		1	99	23.4	1	23.7		23.4	1	23.7	
		50	0	22.2	2	22.7		22.2	2	22.7	
		50	24	22.2	2	22.7		22.2	2	22.7	
	64QAM	50	50	22.2	2	22.7		22.2	2	22.7	
		100	0	22.2	2	22.7		22.2	2	22.7	
		1	0	22.2	2	22.7		22.2	2	22.7	
		1	49	22.2	2	22.7		22.2	2	22.7	
		1	99	22.0	2	22.7		22.0	2	22.7	
		50	0	21.0	3	21.7		21.0	3	21.7	
	256QAM	50	24	20.9	3	21.7		20.9	3	21.7	
		50	50	20.9	3	21.7		20.9	3	21.7	
		100	0	21.0	3	21.7		21.0	3	21.7	
		1	0	19.1	5	19.7		19.1	5	19.7	
		1	49	19.2	5	19.7		19.2	5	19.7	
		1	99	19.2	5	19.7		19.2	5	19.7	
15 MHz	QPSK	50	0	19.0	5	19.7		19.0	5	19.7	
		50	24	18.9	5	19.7		18.9	5	19.7	
		50	50	19.0	5	19.7		19.0	5	19.7	
		100	0	19.0	5	19.7		19.0	5	19.7	
	16QAM	1	0	24.3	0	24.7		24.3	0	24.7	
		1	37	24.2	0	24.7		24.2	0	24.7	
		1	74	24.2	0	24.7		24.2	0	24.7	
		36	0	23.2	1	23.7		23.2	1	23.7	
		36	20	23.2	1	23.7		23.2	1	23.7	
		36	39	23.2	1	23.7		23.2	1	23.7	
	64QAM	75	0	23.2	1	23.7		23.2	1	23.7	
		1	0	23.3	1	23.7		23.3	1	23.7	
		1	37	23.2	1	23.7		23.2	1	23.7	
		1	74	23.4	1	23.7		23.4	1	23.7	
		36	0	22.2	2	22.7		22.2	2	22.7	
		36	20	22.2	2	22.7		22.2	2	22.7	
	256QAM	36	39	22.2	2	22.7		22.2	2	22.7	
		75	0	22.2	2	22.7		22.2	2	22.7	
		1	0	22.3	2	22.7		22.3	2	22.7	
		1	37	22.3	2	22.7		22.3	2	22.7	
		1	74	22.1	2	22.7		22.1	2	22.7	
		36	0	21.0	3	21.7		21.0	3	21.7	
Maximum Average Power (dBm)	Reduced Average Power (dBm)	36	20	21.0	3	21.7		21.0	3	21.7	
		36	39	20.9	3	21.7		20.9	3	21.7	
		75	0	21.0	3	21.7		21.0	3	21.7	
		1	0	19.2	5	19.7		19.2	5	19.7	
		1	37	19.1	5	19.7		19.1	5	19.7	
		1	74	19.1	5	19.7		19.1	5	19.7	
	Reduced Average Power (dBm)	36	0	19.0	5	19.7		19.0	5	19.7	
		36	20	19.0	5	19.7		19.0	5	19.7	
		36	39	19.0	5	19.7		19.0	5	19.7	
		75	0	19.0	5	19.7		19.0	5	19.7	

LTE Band 71 Measured Results (ANT2) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				133172	133297	133422	MPR	Tune-up Limit	133172	133297	133422	MPR	Tune-up Limit
				668 MHz	680.5 MHz	693 MHz			668 MHz	680.5 MHz	693 MHz		
10 MHz	QPSK	1	0	24.3	24.3	24.3	0	24.7	24.3	24.3	24.3	0	24.7
		1	25	24.2	24.3	24.3	0	24.7	24.2	24.3	24.3	0	24.7
		1	49	24.2	24.3	24.3	0	24.7	24.2	24.3	24.3	0	24.7
		25	0	23.2	23.3	23.3	1	23.7	23.2	23.3	23.3	1	23.7
		25	12	23.3	23.3	23.3	1	23.7	23.3	23.3	23.3	1	23.7
		25	25	23.2	23.3	23.3	1	23.7	23.2	23.3	23.3	1	23.7
	16QAM	1	0	23.2	23.3	23.2	1	23.7	23.2	23.3	23.2	1	23.7
		1	25	23.3	23.2	23.1	1	23.7	23.3	23.2	23.1	1	23.7
		1	49	23.3	23.2	23.1	1	23.7	23.3	23.2	23.1	1	23.7
		25	0	22.2	22.2	22.3	2	22.7	22.2	22.2	22.3	2	22.7
		25	12	22.3	22.3	22.2	2	22.7	22.3	22.3	22.2	2	22.7
		25	25	22.2	22.3	22.3	2	22.7	22.2	22.3	22.3	2	22.7
	64QAM	1	0	22.3	22.3	22.3	2	22.7	22.3	22.3	22.3	2	22.7
		1	25	22.5	22.2	22.2	2	22.7	22.5	22.2	22.2	2	22.7
		1	49	22.4	22.2	22.1	2	22.7	22.4	22.2	22.1	2	22.7
		25	0	21.2	21.0	21.0	3	21.7	21.2	21.0	21.0	3	21.7
		25	12	21.3	21.0	21.0	3	21.7	21.3	21.0	21.0	3	21.7
		25	25	21.2	21.1	21.0	3	21.7	21.2	21.1	21.0	3	21.7
	256QAM	1	0	19.3	19.1	19.1	5	19.7	19.3	19.1	19.1	5	19.7
		1	25	19.4	19.3	19.2	5	19.7	19.4	19.3	19.2	5	19.7
		1	49	19.3	19.1	19.0	5	19.7	19.3	19.1	19.0	5	19.7
		25	0	19.2	19.0	18.9	5	19.7	19.2	19.0	18.9	5	19.7
		25	12	19.3	19.0	18.9	5	19.7	19.3	19.0	18.9	5	19.7
		25	25	19.2	19.0	19.0	5	19.7	19.2	19.0	19.0	5	19.7
5 MHz	QPSK	1	0	24.1	24.3	24.2	0	24.7	24.1	24.3	24.2	0	24.7
		1	12	24.2	24.4	24.3	0	24.7	24.2	24.4	24.3	0	24.7
		1	24	24.1	24.2	24.1	0	24.7	24.1	24.2	24.1	0	24.7
		12	0	23.1	23.3	23.3	1	23.7	23.1	23.3	23.3	1	23.7
		12	7	23.2	23.3	23.3	1	23.7	23.2	23.3	23.3	1	23.7
		12	13	23.1	23.3	23.2	1	23.7	23.1	23.3	23.2	1	23.7
	16QAM	25	0	23.1	23.3	23.3	1	23.7	23.1	23.3	23.3	1	23.7
		1	0	23.1	23.4	23.3	1	23.7	23.1	23.4	23.3	1	23.7
		1	12	23.2	23.5	23.5	1	23.7	23.2	23.5	23.5	1	23.7
		1	24	23.1	23.4	23.3	1	23.7	23.1	23.4	23.3	1	23.7
		12	0	22.1	22.4	22.3	2	22.7	22.1	22.4	22.3	2	22.7
		12	7	22.2	22.4	22.4	2	22.7	22.2	22.4	22.4	2	22.7
	64QAM	12	13	22.1	22.4	22.3	2	22.7	22.1	22.4	22.3	2	22.7
		25	0	22.1	22.3	22.3	2	22.7	22.1	22.3	22.3	2	22.7
		1	0	22.4	22.2	22.1	2	22.7	22.4	22.2	22.1	2	22.7
		1	12	22.4	22.3	22.1	2	22.7	22.4	22.3	22.1	2	22.7
		1	24	22.4	22.2	22.0	2	22.7	22.4	22.2	22.0	2	22.7
		12	0	21.2	21.0	21.0	3	21.7	21.2	21.0	21.0	3	21.7
	256QAM	12	7	21.3	21.1	21.0	3	21.7	21.3	21.1	21.0	3	21.7
		12	13	21.2	21.1	20.9	3	21.7	21.2	21.1	20.9	3	21.7
		25	0	21.2	21.1	20.9	3	21.7	21.2	21.1	20.9	3	21.7
		1	0	19.2	19.1	19.0	5	19.7	19.2	19.1	19.0	5	19.7
		1	12	19.4	19.3	19.1	5	19.7	19.4	19.3	19.1	5	19.7
		1	24	19.2	19.2	19.0	5	19.7	19.2	19.2	19.0	5	19.7

9.4. LTE Up-Link Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 1
QPSK	> 25	> 50	> 75	> 100	≤ 2
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 8 and ≤ 25	> 12 and ≤ 50	> 16 and ≤ 75	> 18 and ≤ 100	≤ 2
16 QAM	> 25	> 50	> 75	> 100	≤ 3
64 QAM	≤ 8 and allocation wholly contained within a single CC	≤ 12 and allocation wholly contained within a single CC	≤ 16 and allocation wholly contained within a single CC	≤ 18 and allocation wholly contained within a single CC	≤ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	≤ 3
256 QAM	≥ 1				≤ 5

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPAK modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL} \{ \min(M_A, M_{\text{IM5}}), 0.5 \}$$

Where M_A is defined as follows

$$M_A = \begin{cases} 8.2 & ; 0 \leq A < 0.025 \\ 9.2 - 40A & ; 0.025 \leq A < 0.05 \\ 8 - 16A & ; 0.05 \leq A < 0.25 \\ 4.83 - 3.33A & ; 0.25 \leq A \leq 0.4 \end{cases}$$

$$3.83 - 0.83A \quad ; 0.4 \leq A \leq 1$$

and M_{IM5} is defined as follows

$$M_{IM5} = \begin{cases} 4.5 & ; \Delta_{IM5} < 1.5 * BW_{Channel_CA} \\ 6.0 & ; 1.5 * BW_{Channel_CA} \leq \Delta_{IM5} < BW_{Channel_CA}/2 + \Delta f_{00B} \\ M_A & ; \Delta_{IM5} \geq BW_{Channel_CA}/2 + \Delta f_{00B} \end{cases}$$

Where

$$A = N_{RB_alloc} / N_{RB_agg}$$

$$\Delta_{IM5} = \max(|F_{C_agg} - (3 * F_{agg_alloc_low} - 2 * F_{agg_alloc_high})|, |F_{C_agg} - (3 * F_{agg_alloc_high} - 2 * F_{agg_alloc_low})|)$$

$CEIL\{M_A, 0.5\}$ means rounding upwards to closest 0.5dB, i.e. $MPR \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible $W_{GAP} \leq 42.2$ MHz as follows

$$MPR = CEIL\{M_A, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{cases} -0.125N + 18.25 & ; 2 \leq N \leq 50 \\ -0.0333 N + 13.67 & ; 50 < N \leq 200 \end{cases}$$


Where $N = N_{RB_alloc}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

LTE Carrier Aggregation Test Signal Set-up Procedure**(Use normal LTE set-up procedure in addition with the following steps)**


Set to CMW-500 with following parameters:

- PCC tab:
 - Select the testing Operating Band, Channel, Frequency, Cell Bandwidth, Uplink RBs

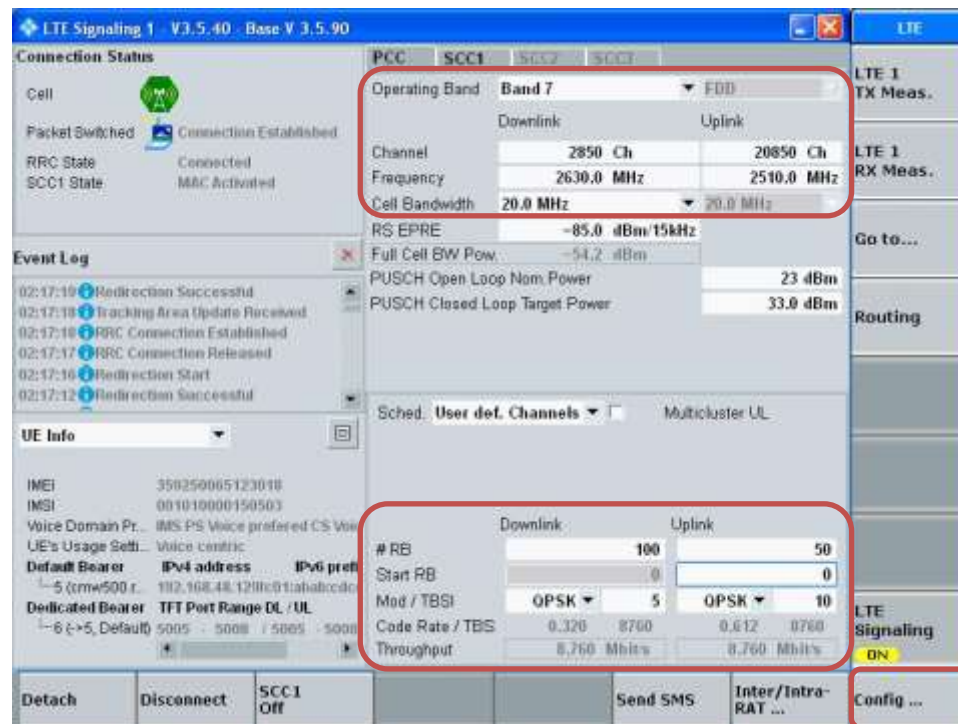


- Go to "Config..."

- Go to “Scenario”
- Set to “2CC CA – 2 RF Out”

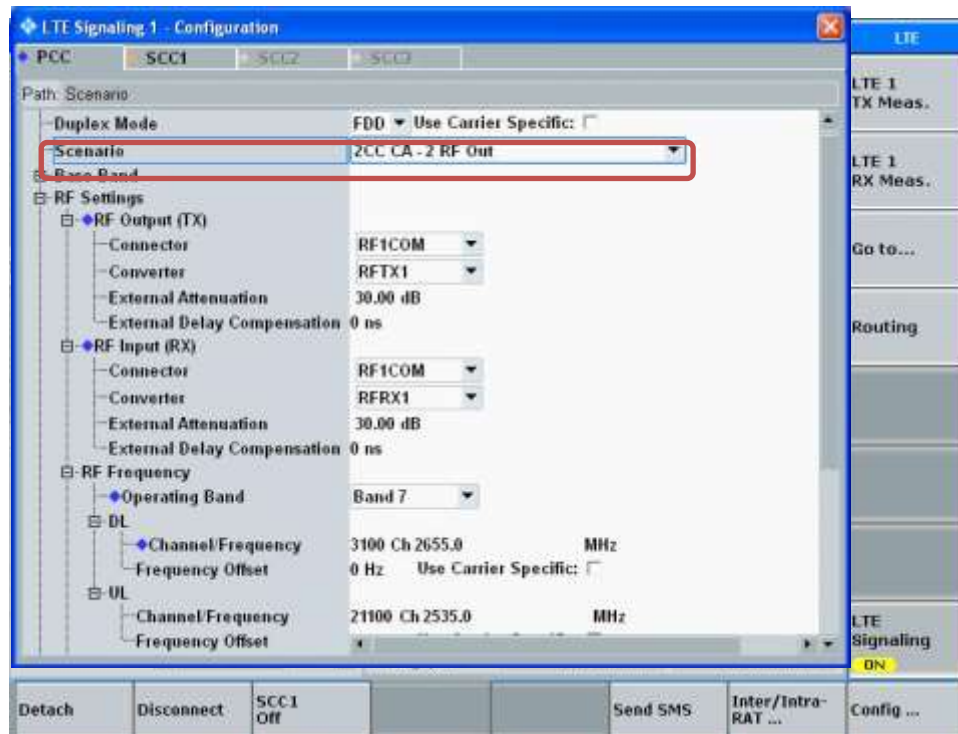

- Select “SCC1” tab
- Go to “Scenario”
- Set to “2CC CA – 2 RF Out”
- Enable “Use UL”
- Enable “Intraband Contiguous to PCC”
- Select “LTE Signaling” button

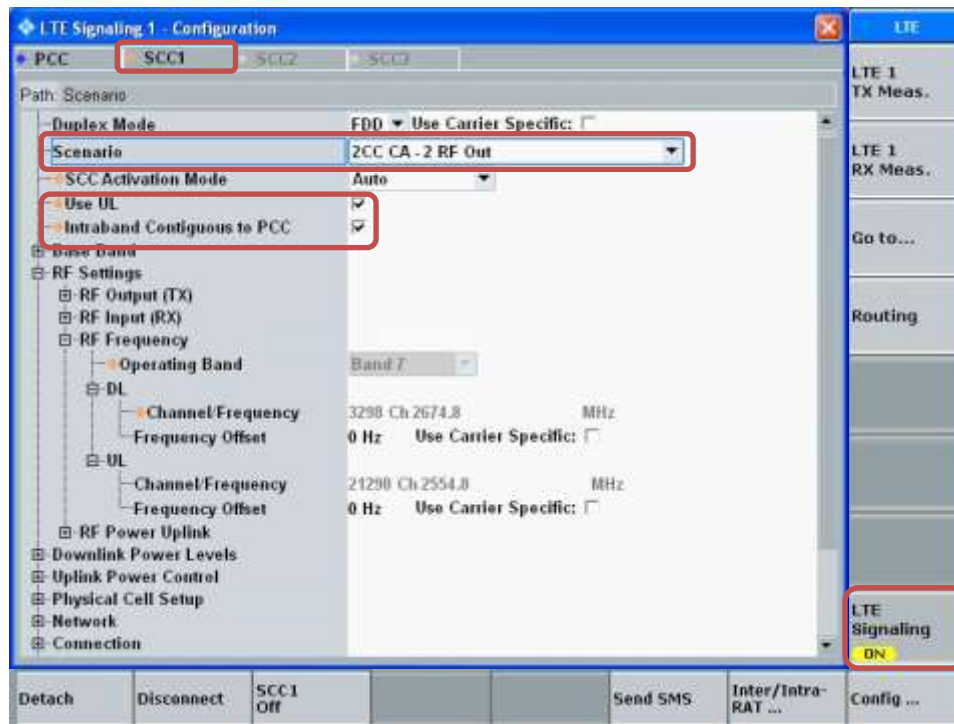

- Select “SCC1” tab
 - Select the testing Cell Bandwidth, Uplink RBs

The screenshot displays the LTE Signaling 1 V3.5.40 Base V 3.5.90 interface. The 'SCC1' tab is selected, and the 'Cell Bandwidth' and 'Uplink RBs' are highlighted with red boxes. The 'Cell Bandwidth' is set to 20.0 MHz. The 'Uplink RBs' are set to 100. The 'Downlink' and 'Uplink' sections show various parameters including Channel, Frequency, Cell Bandwidth, RS EPRE, Full Cell BW Pow., PUSCH Open Loop Nom. Power, PUSCH Closed Loop Target Power, Intraband Contiguous to PCC, and PCC <-> SCC1. The 'UE Info' section shows IMEI, IMSI, Voice Domain Pr., UE's Usage Set., Default Bearer, IPv4 address, IPv6 prefix, Dedicated Bearer, and TTT Port Range DL / UL. The 'LTE Signaling' section shows 'ON'.

LTE Signaling 1 V3.5.40 Base V 3.5.90	
Connection Status Cell Packet Switched RRC State SCC1 State Connection Established Connected MTC Activated Event Log 02:17:10 Redirection Successful 02:17:10 Tracking Area Update Received 02:17:10 RRC Connection Established 02:17:17 RRC Connection Released 02:17:16 Redirection Start 02:17:12 Redirection Successful UE Info IMEI 350250065123010 IMSI 001010000150503 Voice Domain Pr. IMS PS Voice preferred CS Voice UE's Usage Set. Voice centric Default Bearer IPv4 address IPv6 prefix 5 (cmr)500 r 102.168.48.12111c01a1a1c0d0 Dedicated Bearer TTT Port Range DL / UL 6 (c>5, Default) 5005 - 5008 / 5005 - 5008 PCC SCC1 SCC2 SCC3 Operating Band Band 7 FDD Downlink Channel 3040 Ch Frequency 2649.0 MHz Cell Bandwidth 20.0 MHz RS EPRE -85.8 dBm/15kHz Full Cell BW Pow. -55.0 dBm PUSCH Open Loop Nom. Power 23 dBm PUSCH Closed Loop Target Power 33.0 dBm Intraband Contiguous to PCC ☒ PCC <-> SCC1 Swap Uplink Channel 21040 Ch Frequency 2529.0 MHz Cell Bandwidth 20.0 MHz RS EPRE -85.8 dBm/15kHz Full Cell BW Pow. -55.0 dBm PUSCH Open Loop Nom. Power 23 dBm PUSCH Closed Loop Target Power 33.0 dBm Intraband Contiguous to PCC ☒ PCC <-> SCC1 Swap PCC -> SCC1 Copy Sched. User def. Channels Multicell UL Downlink Uplink # RB 100 100 Start RB 0 0 Mod / TBSI QPSK 5 QPSK 10 Code Rate / TBS 0.320 8760 0.613 17568 Throughput 8.760 Mbit/s 17.568 Mbit/s	

Detach

Disconnect

SCC1 Off


Send SMS

Inter/Intra-RAT ...


Config ...

Max Power Setting

- Select “Config ...” button
- Select PCC tab
- Set “Active TPC Setup” to “Max Power”

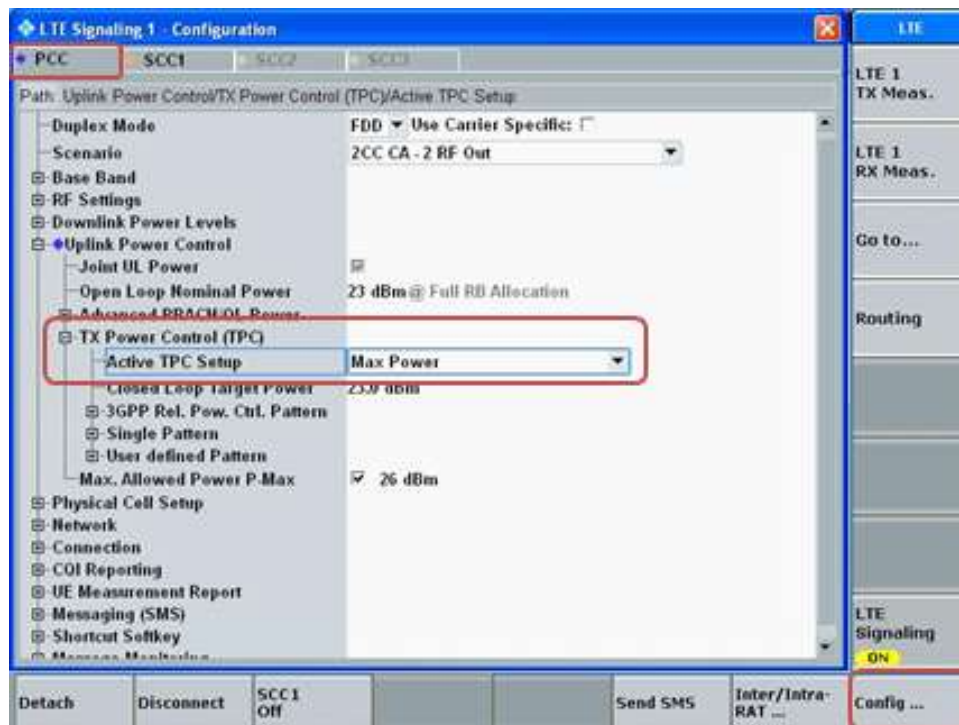


- Select SCC1 tab
- Verify that “Active TPC Setup” is set to “Max Power”

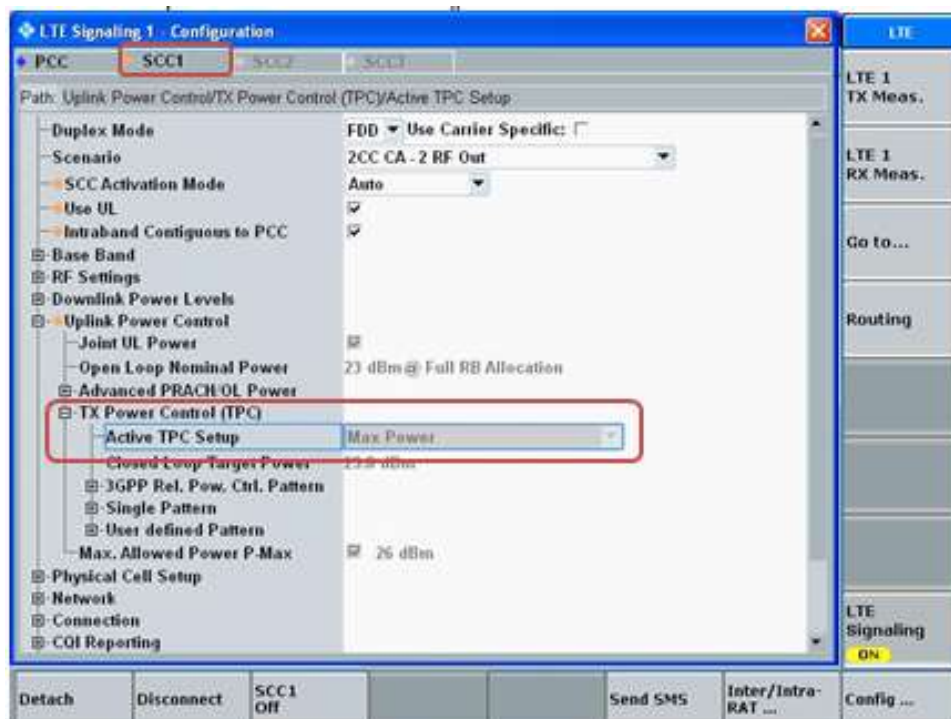

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

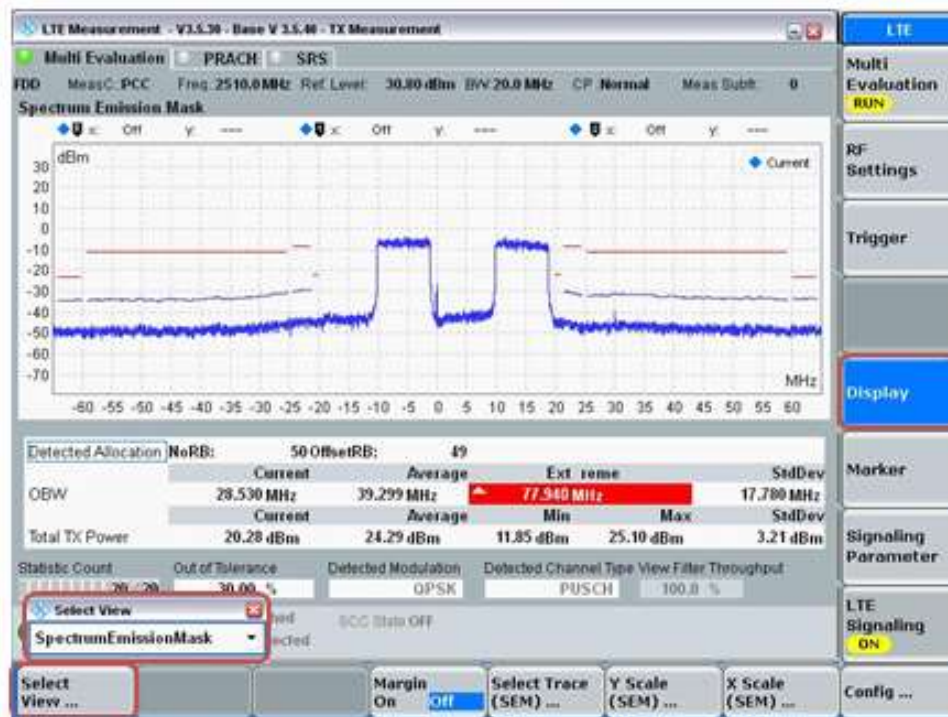

LTE Intra-Band Contiguous Carrier Aggregation

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in table below.

According to November 2017 TCB workshop, Uplink CA SAR Test Guidance as follows:

- a) When the maximum output for UL CA is $\leq$ standalone LTE mode (without CA)
 - PCC is configured according to the highest standalone SAR configuration tested
 - SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC
- b) When the Reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels(PCC based)
- c) UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level

Output Power for LTE UL Carrier Aggregation

Intra-Band Contiguous	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT1		ANT2		ANT3		ANT4			ANT1		ANT2		ANT3		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
CA_5B	QPSK	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
CA_7C	QPSK	25.0	19.5	17.8	18.1	22.6	16.4	18.8	19.7	0.7 / -1.0	25.7	20.2	18.5	18.8	23.3	17.1	19.5	20.4
CA_41C (PC3)	QPSK	25.0	21.7	19.6	20.1	25.0	18.4	20.3	21.8	0.7 / -1.0	25.7	22.4	20.3	20.8	25.7	19.1	21.0	22.5
CA_41C (PC2)	QPSK	28.0	N/A	N/A	N/A	25.3	N/A	N/A	N/A	0.7 / -1.0	28.7	N/A	N/A	N/A	26.0	N/A	N/A	N/A
Intra-Band Contiguous	Mode	Target Output Power (dBm)								Tolerance	Maximum Output Power (Tune-up Limit) (dBm)							
		ANT7		ANT8		ANT9		ANT4			ANT7		ANT8		ANT9		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
CA_48C	QPSK	24.0	21.1	21.5	22.0	23.3	20.6	20.8	22.0	1.0 / -1.0	25.0	22.1	22.5	23.0	24.3	21.6	21.8	23.0

LTE CA 5B Measured Results

UL CA Combination	Antenna	Power Mode	Modulation	PCC				SCC				Standalone Power		(PCC + SCC) UL CA Power		
				BW (MHz)	Freq	RB	Offset	BW (MHz)	Freq	RB	Offset	Tune-Up Limit (dBm)	UL CA Inactive (dBm)	Tune-Up Limit (dBm)	UL CA active (dBm)	Delta
CA_5B	ANT 1	Mode A	QPSK	10	831.6	1	49	5	841.5	1	0	25.7	25.2	25.7	25.2	0.0
CA_5B	ANT 1	Mode B	QPSK	10	831.6	1	49	5	841.5	1	0	24.5	24.0	24.5	24.0	0.0
CA_5B	ANT 2	Mode A	QPSK	10	831.6	1	49	5	841.5	1	0	24.1	23.8	24.1	23.8	0.0
CA_5B	ANT 2	Mode B	QPSK	10	831.6	1	49	5	841.5	1	0	24.7	24.2	24.7	24.3	0.1

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

LTE CA 7C Measured Results

UL CA Combination	Antenna	Power Mode	Modulation	PCC				SCC				Standalone Power		(PCC + SCC) UL CA Power		
				BW (MHz)	Freq	RB	Offset	BW (MHz)	Freq	RB	Offset	Tune-Up Limit (dBm)	UL CA Inactive (dBm)	Tune-Up Limit (dBm)	UL CA active (dBm)	Delta
CA_7C	ANT 1	Mode A	QPSK	20	2525.1	1	99	20	2544.9	1	0	25.7	25.3	25.7	25.2	-0.1
CA_7C	ANT 1	Mode B	QPSK	20	2525.1	1	99	20	2544.9	1	0	20.2	19.7	20.2	19.6	-0.1
CA_7C	ANT 1	Mode B	QPSK	20	2510.0	1	99	20	2529.8	1	0	20.2	19.6	20.2	19.6	0.0
CA_7C	ANT 2	Mode A	QPSK	20	2540.2	1	99	20	2560.0	1	0	18.5	18.1	18.5	18.0	-0.1
CA_7C	ANT 2	Mode B	QPSK	20	2525.1	1	99	20	2544.9	1	0	18.8	18.4	18.8	18.3	-0.1
CA_7C	ANT 3	Mode A	QPSK	20	2525.1	1	99	20	2544.9	1	0	23.3	22.8	23.3	22.8	0.0
CA_7C	ANT 3	Mode B	QPSK	20	2525.1	1	99	20	2544.9	1	0	17.1	16.5	17.1	16.6	0.1
CA_7C	ANT 3	Mode B	QPSK	20	2540.2	1	99	20	2560.0	1	0	17.1	16.7	17.1	16.6	-0.1
CA_7C	ANT 4	Mode A	QPSK	20	2540.2	1	99	20	2560.0	1	0	19.5	18.6	19.5	18.6	0.0
CA_7C	ANT 4	Mode B	QPSK	20	2525.1	1	99	20	2544.9	1	0	20.4	19.6	20.4	19.6	0.0

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

LTE CA 41C (PC3) Measured Results

UL CA Combination	Antenna	Power Mode	Modulation	PCC				SCC				Standalone Power		(PCC + SCC) UL CA Power		
				BW (MHz)	Freq	RB	Offset	BW (MHz)	Freq	RB	Offset	Tune-Up Limit (dBm)	UL CA Inactive (dBm)	Tune-Up Limit (dBm)	UL CA active (dBm)	Delta
CA_41C	ANT 1	Mode A	QPSK	20	2583.1	1	99	20	2602.9	1	0	25.7	25.1	25.7	24.9	-0.2
CA_41C	ANT 1	Mode B	QPSK	20	2583.1	1	99	20	2602.9	1	0	22.4	21.8	22.4	21.6	-0.2
CA_41C	ANT 1	Mode B	QPSK	20	2506.0	1	99	20	2525.8	1	0	22.4	21.5	22.4	21.4	-0.1
CA_41C	ANT 2	Mode A	QPSK	20	2583.1	1	99	20	2602.9	1	0	20.3	20.1	20.3	20.0	-0.1
CA_41C	ANT 2	Mode B	QPSK	20	2583.1	1	99	20	2602.9	1	0	20.8	20.6	20.8	20.4	-0.2
CA_41C	ANT 2	Mode B	QPSK	20	2506.0	1	99	20	2525.8	1	0	20.8	20.4	20.8	20.3	-0.1
CA_41C	ANT 3	Mode A	QPSK	20	2583.1	1	99	20	2602.9	1	0	25.7	25.3	25.7	25.3	0.0
CA_41C	ANT 3	Mode B	QPSK	20	2583.1	1	99	20	2602.9	1	0	19.1	18.7	19.1	18.6	-0.1
CA_41C	ANT 4	Mode A	QPSK	20	2660.2	1	99	20	2680.0	1	0	21.0	20.2	21.0	20.2	0.0
CA_41C	ANT 4	Mode B	QPSK	20	2583.1	1	99	20	2602.9	1	0	22.5	21.5	22.5	21.4	-0.1
CA_41C	ANT 4	Mode B	QPSK	20	2660.2	1	99	20	2680.0	1	0	22.5	21.7	22.5	21.6	-0.1

Note(s):

1. PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.
2. Additional SAR for UL CA PC2 is not required. Test reduction has been applied based on standalone SAR.
3. SAR evaluation for PC2 is only required when its Maximum output power (Tune-up Limit) is higher from PC3.

LTE CA 48C Measured Results

UL CA Combination	Antenna	Power Mode	Modulation	PCC				SCC				Standalone Power		(PCC + SCC) UL CA Power		
				BW (MHz)	Freq	RB	Offset	BW (MHz)	Freq	RB	Offset	Tune-Up Limit (dBm)	UL CA Inactive (dBm)	Tune-Up Limit (dBm)	UL CA active (dBm)	Delta
CA_48C	ANT 7	Mode A	QPSK	20	3615.1	1	99	20	3634.9	1	0	25.4	24.9	25.0	24.6	-0.3
CA_48C	ANT 7	Mode B	QPSK	20	3615.1	1	99	20	3634.9	1	0	22.1	21.9	22.1	21.9	0.0
CA_48C	ANT 7	Mode B	QPSK	20	3560.0	1	99	20	3579.8	1	0	22.1	21.9	22.1	21.8	-0.1
CA_48C	ANT 8	Mode A	QPSK	20	3670.2	1	99	20	3690.0	1	0	22.5	21.7	22.5	21.6	-0.1
CA_48C	ANT 8	Mode B	QPSK	20	3615.1	1	99	20	3634.9	1	0	23.0	22.4	23.0	22.0	-0.4
CA_48C	ANT 9	Mode A	QPSK	20	3615.1	1	99	20	3634.9	1	0	24.3	23.8	24.3	23.4	-0.4
CA_48C	ANT 9	Mode B	QPSK	20	3615.1	1	99	20	3634.9	1	0	21.6	21.3	21.6	21.2	-0.1
CA_48C	ANT 9	Mode B	QPSK	20	3560.0	1	99	20	3579.8	1	0	21.6	20.9	21.6	20.6	-0.3
CA_48C	ANT 4	Mode A	QPSK	20	3560.0	1	99	20	3579.8	1	0	21.8	20.7	21.8	20.2	-0.5
CA_48C	ANT 4	Mode B	QPSK	20	3560.0	1	99	20	3579.8	1	0	23.0	21.8	23.0	21.6	-0.2
CA_48C	ANT 4	Mode B	QPSK	20	3615.1	1	99	20	3634.9	1	0	23.0	22.0	23.0	21.6	-0.4

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

LTE Inter-Band Carrier Aggregation

According to October 2018 TCB workshop, Uplink CA SAR Test Guidance as follows:

- Provide the single uplink SAR values you have obtained for the relevant SAR configurations and frequency bands that employ inter-band uplink carrier aggregation.
- If the single uplink 1-g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1-g SAR values are less than 1.45 W/kg no additional measurements need to be performed.
- If one of the single uplink 1-g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1-g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.
- If the algebraic sum of the 1-g SAR values is > 1.45 W/kg additional measurements may have to be made. Submit a KDB inquiry for additional guidance.

Maximum Output Power (Tune-up Limit) and SAR test exemption for LTE UL Carrier Aggregation

The maximum UL CA transmit power is reduced by 3dB from the standalone values for both carriers therefore SAR will be reduced accordingly.

The reported 1g SAR for any standalone LTE configuration does not exceed 1.2 W/kg. The worst case UL CA SAR per band will therefore be <0.6W/kg. As the SAR for each individual band is <0.6 W/kg and the algebraic summation cannot exceed 1.2 W/kg no further measurements are needed.

The combined SAR contribution cannot exceed the highest standalone SAR:

$$(SAR_{LTE1}/2 + SAR_{LTE2}/2 \leq \text{Max} (SAR_{LTE1}, SAR_{LTE2}))$$

therefore simultaneous transmission analysis of UL-CA and WLAN/BT transmitters can be done using either of the standalone LTE SAR values alone.

9.5. LTE Down-Link Carrier Aggregation

This device supports LTE downlink carrier aggregation (CA). The tables appendix G is show the supported frequency bands of the device for DL Inter-band and DL Intra-band combinations.

9.6. 5G NR(FR1)

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 138.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS138.521-1.

Table 6.2.2.3-1: Maximum Power Reduction (MPR) for Power 3

Modulation	MPR (dB)		
	Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM PI/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
	$\leq 0.5^2$		0^2
DFT-s-OFDM QPSK	≤ 1		0
DFT-s-OFDM 16 QAM	≤ 2		≤ 1
DFT-s-OFDM 64 QAM	≤ 2.5		
DFT-s-OFDM 256 QAM	≤ 4.5		
CP-OFDM QPSK	≤ 3		≤ 1.5
CP-OFDM 16 QAM	≤ 3		≤ 2
CP-OFDM 64 QAM	≤ 3.5		
CP-OFDM 256 QAM	≤ 6.5		
NOTE 1: Applicable for UE operating in TDD mode with PI/2 BPSK modulation and UE indicates support for UE capability <i>powerBoosting-pi2BPSK</i> and if the IE <i>powerBoostPi2BPSK</i> is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0dB MPR is 26dBm.			
NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 and if the IE <i>powerBoostPi2BPSK</i> is set to 0 and if more than 40% of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.			

The allowed A-MPR values specified below in Table 6.2.3.3.1-1 of 3GPP TS138.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01"

Table 6.2.3.3.1-1: Additional maximum power reduction (A-MPR)

Network Signalling label	Requirements (subclause)	NR Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01		Table 5.2-1	5, 10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Table 5.3.2-1	N/A

Uplink RB allocations were used to Table 6.1-1 of the 3GPP TS 138.521-1.

Channel Bandwidth	SCS(kHz)	OFDM	RB allocation							
			Edge_Full_Left	Edge_Full_Right	Edge_1RB_Left	Edge_1RB_Right	Outer_Full	Inner_Full	Inner_1RB_Left	Inner_1RB_Right
5MHz	15	DFT-s	2@0	2@23	1@0	1@24	25@0	12@6	1@1	1@23
		CP	2@0	2@23	1@0	1@24	25@0	13@6	1@1	1@23
	30	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 ¹	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 ¹	1@1	1@9
	60	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10MHz	15	DFT-s	2@0	2@50	1@0	1@51	50@0	25@12	1@1	1@50
		CP	2@0	2@50	1@0	1@51	52@0	26@13	1@1	1@50
	30	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
	60	DFT-s	2@0	2@9	1@0	1@10	10@0	5@2 ¹	1@1	1@9
		CP	2@0	2@9	1@0	1@10	11@0	5@2 ¹	1@1	1@9
15MHz	15	DFT-s	2@0	2@77	1@0	1@78	75@0	36@18	1@1	1@77
		CP	2@0	2@77	1@0	1@78	79@0	39@19 ¹	1@1	1@77
	30	DFT-s	2@0	2@36	1@0	1@37	36@0	18@9	1@1	1@36
		CP	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
	60	DFT-s	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
		CP	2@0	2@16	1@0	1@17	18@0	9@4	1@1	1@16
20MHz	15	DFT-s	2@0	2@104	1@0	1@105	100@0	50@25	1@1	1@104
		CP	2@0	2@104	1@0	1@105	106@0	53@26	1@1	1@104
	30	DFT-s	2@0	2@49	1@0	1@50	50@0	25@12	1@1	1@49
		CP	2@0	2@49	1@0	1@50	51@0	25@12 ¹	1@1	1@49
	60	DFT-s	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
		CP	2@0	2@22	1@0	1@23	24@0	12@6	1@1	1@22
25MHz	15	DFT-s	2@0	2@131	1@0	1@132	128@0	64@32	1@1	1@131
		CP	2@0	2@131	1@0	1@132	133@0	67@33	1@1	1@131
	30	DFT-s	2@0	2@63	1@0	1@64	64@0	32@16	1@1	1@63
		CP	2@0	2@63	1@0	1@64	65@0	33@16	1@1	1@63
	60	DFT-s	2@0	2@29	1@0	1@30	30@0	15@7 ¹	1@1	1@29
		CP	2@0	2@29	1@0	1@30	31@0	15@7 ¹	1@1	1@29
30MHz	15	DFT-s	2@0	2@158	1@0	1@159	160@0	80@40	1@1	1@158
		CP	2@0	2@158	1@0	1@159	160@0	80@40	1@1	1@158
	30	DFT-s	2@0	2@76	1@0	1@77	75@0	36@18	1@1	1@76
		CP	2@0	2@76	1@0	1@77	78@0	39@19	1@1	1@76
	60	DFT-s	2@0	2@36	1@0	1@37	36@0	18@9	1@1	1@36
		CP	2@0	2@36	1@0	1@37	38@0	19@9	1@1	1@36
40MHz	15	DFT-s	2@0	2@214	1@0	1@215	216@0	108@54	1@1	1@214
		CP	2@0	2@214	1@0	1@215	216@0	108@54	1@1	1@214
	30	DFT-s	2@0	2@104	1@0	1@105	100@0	50@25	1@1	1@104
		CP	2@0	2@104	1@0	1@105	106@0	53@26	1@1	1@104
	60	DFT-s	2@0	2@49	1@0	1@50	50@0	25@12	1@1	1@49
		CP	2@0	2@49	1@0	1@50	51@0	25@12 ¹	1@1	1@49
50MHz	15	DFT-s	2@0	2@268	1@0	1@269	270@0	135@67	1@1	1@268
		CP	2@0	2@268	1@0	1@269	270@0	135@67	1@1	1@268
	30	DFT-s	2@0	2@131	1@0	1@132	128@0	64@32	1@1	1@131
		CP	2@0	2@131	1@0	1@132	133@0	67@33	1@1	1@131
	60	DFT-s	2@0	2@63	1@0	1@64	64@0	32@16	1@1	1@63
		CP	2@0	2@63	1@0	1@64	65@0	33@16	1@1	1@63
60MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	30	DFT-s	2@0	2@160	1@0	1@161	162@0	81@40	1@1	1@160
		CP	2@0	2@160	1@0	1@161	162@0	81@40	1@1	1@160
	60	DFT-s	2@0	2@77	1@0	1@78	75@0	36@18	1@1	1@77
		CP	2@0	2@77	1@0	1@78	79@0	39@19 ¹	1@1	1@77
80MHz	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
90MHz	30	DFT-s	2@0	2@215	1@0	1@216	216@0	108@54	1@1	1@215
		CP	2@0	2@215	1@0	1@216	217@0	109@54	1@1	1@215
	60	DFT-s	2@0	2@105	1@0	1@106	100@0	50@25	1@1	1@105
		CP	2@0	2@105	1@0	1@106	107@0	53@26 ¹	1@1	1@105
	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100MHz	30	DFT-s	2@0	2@243	1@0	1@244	240@0	120@60	1@1	1@243
		CP	2@0	2@243	1@0	1@244	245@0	123@61	1@1	1@243
	60	DFT-s	2@0	2@119	1@0	1@120	120@0	60@30	1@1	1@119
		CP	2@0	2@119	1@0	1@120	121@0	61@30	1@1	1@119
	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100MHz	30	DFT-s	2@0	2@271	1@0	1@272	270@0	135@67	1@1	1@271
		CP	2@0	2@271	1@0	1@272	273@0	137@68	1@1	1@271
	60	DFT-s	2@0	2@133	1@0	1@134	135@0	64@32	1@1	1@133
		CP	2@0	2@133	1@0	1@134	135@0	67@33 ¹	1@1	1@133
	15	DFT-s	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
		CP	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note 1: The allocated RB number Low is $cell(N_{RB}/2) - 1$ in order to meet Inner RB allocation definition ($RB_{start,Low} \leq RB_{start} \leq RB_{start,High}$) described in subclause 6.2.2 of TS 38.101-1 [2].

Output Power for 5G NR (FR1)

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping 5G NR(FR1) bands as follows:

- c) The maximum output power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for the SAR test exclusion.
- d) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

- NR Band n2 (1850-1910 MHz) is covered by NR Band n25 (1850-1915 MHz)

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

SAR measurement is not required for the Pi/2 BPSK, 16QAM, 64QAM and 256QAM. When the highest maximum output power for Pi/2 BPSK, 16QAM, 64QAM and 256QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

Please refer to section 6.5. for 5G NR(FR1) detail test channels.

RF Air interface	Mode	Target Output Pow er (dBm)								Tolerance	Maximum Output Pow er (Tune-up Limit) (dBm)							
		ANT1		ANT2		ANT3		ANT4			ANT1		ANT2		ANT3		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
NR n2	QPSK	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
NR n5	QPSK	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
NR n7	QPSK	25.0	19.5	17.8	18.1	22.6	16.4	18.8	19.7	0.7 / -1.0	25.7	20.2	18.5	18.8	23.3	17.1	19.5	20.4
NR n12	QPSK	25.0	25.0	23.6	24.0					0.7 / -1.0	25.7	25.7	24.3	24.7				
NR n14	QPSK	25.0	25.0	23.8	24.0					0.7 / -1.0	25.7	25.7	24.5	24.7				
NR n25	QPSK	25.0	18.3	20.8	21.0	24.1	20.1	18.5	19.1	0.7 / -1.0	25.7	19.0	21.5	21.7	24.8	20.8	19.2	19.8
NR n26	QPSK	25.0	23.8	23.4	24.0					0.7 / -1.0	25.7	24.5	24.1	24.7				
NR n30	QPSK	24.9	19.5	19.8	20.3	22.9	18.6	19.0	19.4	0.7 / -1.0	25.6	20.2	20.5	21.0	23.6	19.3	19.7	20.1
NR n41 (PC3)	QPSK	25.0	19.7	17.6	18.1	23.3	16.4	18.3	19.8	0.7 / -1.0	25.7	20.4	18.3	18.8	24.0	17.1	19.0	20.5
NR n41 (PC2)	QPSK	26.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	0.7 / -1.0	27.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NR n53	QPSK	20.0	20.0	20.0	20.0					0.7 / -1.0	20.7	20.7	20.7	20.7				
NR n66	QPSK	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
NR n70	QPSK	24.1	17.4	20.3	20.6	24.8	20.8	18.4	18.6	0.7 / -1.0	24.8	18.1	21.0	21.3	25.5	21.5	19.1	19.3
NR n71	QPSK	25.0	25.0	24.0	24.0					0.7 / -1.0	25.7	25.7	24.7	24.7				
RF Air interface	Mode	Target Output Pow er (dBm)								Tolerance	Maximum Output Pow er (Tune-up Limit) (dBm)							
		ANT7		ANT8		ANT9		ANT4			ANT7		ANT8		ANT9		ANT4	
		Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B		+ / -	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A
NR n77 (PC3)	QPSK	24.5	18.0	18.2	17.5	24.5	17.8	17.1	17.7	1.0 / -1.0	25.5	19.0	19.2	18.5	25.5	18.8	18.1	18.7
NR n77 (PC2)	QPSK	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1.0 / -1.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

NR Band 5 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							167300 836.5 MHz		MPR	Tune-up Limit		167300 836.5 MHz		MPR	Tune-up Limit
20	DFT-s	15	$\pi/2$ BPSK	1	1		24.7		0	25.7		23.7		0	24.5
				1	52		25.0		0	25.7		24.0		0	24.5
				1	104		24.6		0	25.7		23.6		0	24.5
				50	25		24.8		0	25.7		24.0		0	24.5
				1	1		24.7		0	25.7		23.8		0	24.5
			QPSK	1	52		24.6		0	25.7		23.7		0	24.5
				1	104		24.9		0	25.7		23.6		0	24.5
				50	25		24.6		0	25.7		23.7		0	24.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							167300 836.5 MHz		MPR	Tune-up Limit		167300 836.5 MHz		MPR	Tune-up Limit
15	DFT-s	15	$\pi/2$ BPSK	1	1		24.7		0	25.7		23.8		0	24.5
				1	39		24.6		0	25.7		23.7		0	24.5
				1	77		25.0		0	25.7		23.6		0	24.5
				36	18		25.0		0	25.7		23.6		0	24.5
				1	1		24.7		0	25.7		23.8		0	24.5
			QPSK	1	39		24.6		0	25.7		23.7		0	24.5
				1	77		25.0		0	25.7		23.6		0	24.5
				36	18		24.6		0	25.7		23.7		0	24.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							167300 836.5 MHz		MPR	Tune-up Limit		167300 836.5 MHz		MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1		24.7		0	25.7		23.6		0	24.5
				1	25		25.0		0	25.7		23.6		0	24.5
				1	50		24.9		0	25.7		23.6		0	24.5
				25	12		24.9		0	25.7		23.6		0	24.5
				1	1		24.6		0	25.7		23.7		0	24.5
			QPSK	1	25		24.6		0	25.7		23.6		0	24.5
				1	50		24.9		0	25.7		23.6		0	24.5
				25	12		24.9		0	25.7		23.6		0	24.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						165300	167300	169300	MPR	Tune-up Limit	165300	167300	169300	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.6	25.0	24.8	0	25.7	23.8	23.7	23.7	0	24.5
				1	12	24.6	24.9	24.8	0	25.7	23.7	23.6	23.7	0	24.5
				1	23	24.6	24.9	24.8	0	25.7	23.8	23.6	23.7	0	24.5
				12	6	24.6	24.9	24.8	0	25.7	23.8	23.6	23.7	0	24.5
				1	1	24.6	24.6	24.8	0	25.7	23.8	23.7	23.7	0	24.5
			QPSK	1	12	24.6	24.9	24.8	0	25.7	23.7	23.6	23.6	0	24.5
				1	23	24.6	25.0	24.8	0	25.7	23.8	23.6	23.7	0	24.5
				12	6	24.6	24.9	24.8	0	25.7	23.8	23.6	23.7	0	24.5

NR Band 5 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						167300	836.5 MHz	23.5	MPR	Tune-up Limit	167300	836.5 MHz	23.5
20	DFT-s	15	$\pi/2$ BPSK	1	1	23.5		23.5	0	24.1	23.9		23.9
				1	52	23.6		23.6	0	24.1	24.0		24.7
				1	104	23.2		23.2	0	24.1	23.6		24.7
				50	25	23.5		23.5	0	24.1	23.9		24.7
				1	1	23.4		23.4	0	24.1	23.7		24.7
			QPSK	1	52	23.3		23.3	0	24.1	23.7		24.7
				1	104	23.3		23.3	0	24.1	23.5		24.7
				50	25	23.5		23.5	0	24.1	23.9		24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						167300	836.5 MHz	23.3	MPR	Tune-up Limit	167300	836.5 MHz	23.8
15	DFT-s	15	$\pi/2$ BPSK	1	1	23.3		23.3	0	24.1	23.7		24.7
				1	39	23.3		23.3	0	24.1	23.5		24.7
				1	77	23.2		23.2	0	24.1	23.6		24.7
				36	18	23.3		23.3	0	24.1	23.7		24.7
				1	1	23.3		23.3	0	24.1	23.6		24.7
			QPSK	1	39	23.3		23.3	0	24.1	23.6		24.7
				1	77	23.3		23.3	0	24.1	23.6		24.7
				36	18	23.2		23.2	0	24.1	23.7		24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						167300	836.5 MHz	23.5	MPR	Tune-up Limit	167300	836.5 MHz	23.5
10	DFT-s	15	$\pi/2$ BPSK	1	1	23.5		23.5	0	24.1	23.6		24.7
				1	25	23.5		23.5	0	24.1	23.5		24.7
				1	50	23.6		23.6	0	24.1	23.5		24.7
				25	12	23.4		23.4	0	24.1	23.5		24.7
				1	1	23.2		23.2	0	24.1	23.5		24.7
			QPSK	1	25	23.5		23.5	0	24.1	23.5		24.7
				1	50	23.6		23.6	0	24.1	23.5		24.7
				25	12	23.5		23.5	0	24.1	23.6		24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						165300	167300	169300	MPR	Tune-up Limit	165300	167300	169300
5	DFT-s	15	$\pi/2$ BPSK	1	1	23.5	23.2	23.2	0	24.1	23.7	23.5	23.7
				1	12	23.6	23.6	23.3	0	24.1	23.6	23.6	23.6
				1	23	23.5	23.5	23.3	0	24.1	23.6	23.5	23.6
				12	6	23.5	23.3	23.4	0	24.1	23.7	23.5	23.6
				1	1	23.4	23.6	23.3	0	24.1	23.7	23.5	23.7
				1	12	23.4	23.5	23.2	0	24.1	23.7	23.5	23.6
			QPSK	1	23	23.4	23.5	23.5	0	24.1	23.6	23.5	23.7
				12	6	23.3	23.5	23.3	0	24.1	23.7	23.5	23.7

NR Band 7 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
40	DFT-s	15	π/2 BPSK	1	1		25.0		0	25.7		19.3		0	20.2
				1	107		25.0		0	25.7		19.3		0	20.2
				1	214		25.0		0	25.7		19.3		0	20.2
				108	54		24.9		0	25.7		19.3		0	20.2
			QPSK	1	1		25.0		0	25.7		19.3		0	20.2
				1	107		25.0		0	25.7		19.3		0	20.2
				1	214		25.0		0	25.7		19.2		0	20.2
				108	54		25.0		0	25.7		19.3		0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
30	DFT-s	15	π/2 BPSK	1	1		25.0		0	25.7		19.3		0	20.2
				1	79		25.0		0	25.7		19.3		0	20.2
				1	158		25.0		0	25.7		19.3		0	20.2
				80	40		24.9		0	25.7		19.2		0	20.2
			QPSK	1	1		25.0		0	25.7		19.3		0	20.2
				1	79		25.0		0	25.7		19.3		0	20.2
				1	158		25.0		0	25.7		19.3		0	20.2
				80	40		25.0		0	25.7		19.3		0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
25	DFT-s	15	π/2 BPSK	1	1		25.0		0	25.7		19.2		0	20.2
				1	66		24.9		0	25.7		19.3		0	20.2
				1	131		25.0		0	25.7		19.3		0	20.2
				64	32		24.8		0	25.7		19.2		0	20.2
			QPSK	1	1		25.0		0	25.7		19.2		0	20.2
				1	66		24.9		0	25.7		19.3		0	20.2
				1	131		25.0		0	25.7		19.3		0	20.2
				64	32		24.9		0	25.7		19.2		0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						502000 2510 MHz	507000 2535 MHz	512000 2560 MHz	MPR	Tune-up Limit	502000 2510 MHz	507000 2535 MHz	512000 2560 MHz	MPR	Tune-up Limit
20	DFT-s	15	π/2 BPSK	1	1	24.8	24.9	24.8	0	25.7	19.1	19.2	19.2	0	20.2
				1	52	24.8	24.9	24.9	0	25.7	19.3	19.2	19.1	0	20.2
				1	104	24.8	24.9	24.9	0	25.7	19.2	19.2	19.1	0	20.2
				50	25	24.8	24.9	24.8	0	25.7	19.1	19.1	19.1	0	20.2
			QPSK	1	1	24.8	24.9	24.8	0	25.7	19.1	19.1	19.1	0	20.2
				1	52	25.0	24.9	24.8	0	25.7	19.1	19.1	19.1	0	20.2
				1	104	24.9	25.0	24.9	0	25.7	19.1	19.2	19.2	0	20.2
				50	25	24.8	24.9	24.9	0	25.7	19.0	19.1	19.1	0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501500 2507.5 MHz	507000 2535 MHz	512500 2562.5 MHz	MPR	Tune-up Limit	501500 2507.5 MHz	507000 2535 MHz	512500 2562.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1	24.8	24.9	24.8	0	25.7	19.0	19.2	19.2	0	20.2
				1	39	24.8	24.9	24.8	0	25.7	19.0	19.2	19.2	0	20.2
				1	77	24.9	24.9	24.8	0	25.7	19.0	19.1	19.2	0	20.2
				36	18	24.8	24.9	24.8	0	25.7	19.0	19.0	19.1	0	20.2
			QPSK	1	1	24.8	24.8	25.0	0	25.7	19.0	19.2	19.2	0	20.2
				1	39	24.9	24.9	24.9	0	25.7	19.0	19.2	19.2	0	20.2
				1	77	24.8	24.9	24.9	0	25.7	19.1	19.1	19.2	0	20.2
				36	18	24.8	24.9	24.8	0	25.7	19.0	19.1	19.1	0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501000 2505 MHz	507000 2535 MHz	513000 2565 MHz	MPR	Tune-up Limit	501000 2505 MHz	507000 2535 MHz	513000 2565 MHz	MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1	24.8	24.8	24.8	0	25.7	19.1	19.0	19.0	0	20.2
				1	25	24.8	24.8	24.8	0	25.7	19.1	19.0	19.0	0	20.2
				1	50	24.8	24.8	24.8	0	25.7	19.1	19.0	19.0	0	20.2
				25	12	24.8	25.0	25.0	0	25.7	19.1	19.0	19.0	0	20.2
			QPSK	1	1	24.8	24.8	24.8	0	25.7	19.1	19.0	19.0	0	20.2
				1	25	24.8	24.8	24.8	0	25.7	19.1	19.0	19.0	0	20.2
				1	50	24.9	25.0	24.8	0	25.7	19.2	19.0	19.0	0	20.2
				25	12	24.8	25.0	24.8	0	25.7	19.0	19.0	19.0	0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						500500 2502.5 MHz	507000 2535 MHz	513500 2567.5 MHz	MPR	Tune-up Limit	500500 2502.5 MHz	507000 2535 MHz	513500 2567.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	24.9	24.9	24.9	0	25.7	18.9	19.0	18.9	0	20.2
				1	12	24.9	24.9	24.9	0	25.7	19.0	19.0	18.9	0	20.2
				1	23	25.0	24.9	24.9	0	25.7	19.0	19.0	19.0	0	20.2
				12	6	24.9	25.0	24.9	0	25.7	18.9	19.0	18.9	0	20.2
			QPSK	1	1	24.9	24.9	24.8	0	25.7	19.0	19.0	18.9	0	20.2
				1	12	24.9	24.9	24.9	0	25.7	19.0	19.0	18.9	0	20.2
				1	23	25.0	25.0	24.9	0	25.7	19.0	19.1	19.0	0	20.2
				12	6	24.9	24.9	24.9	0	25.7	19.0	19.0	19.0	0	20.2

NR Band 7 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						507000	507000	507000	MPR	Tune-up Limit	507000	507000	507000	MPR	Tune-up Limit
40	DFT-s	15	$\pi/2$ BPSK	1	1	17.9	17.9	17.9	0	18.5	18.1	18.1	18.1	0	18.8
				1	107	18.0	18.0	18.0	0	18.5	18.3	18.3	18.3	0	18.8
				1	214	17.6	17.6	17.6	0	18.5	18.0	18.0	18.0	0	18.8
				108	54	18.0	18.0	18.0	0	18.5	18.3	18.3	18.3	0	18.8
			QPSK	1	1	17.7	17.7	17.7	0	18.5	18.3	18.3	18.3	0	18.8
				1	107	17.7	17.7	17.7	0	18.5	18.1	18.1	18.1	0	18.8
				1	214	17.9	17.9	17.9	0	18.5	18.0	18.0	18.0	0	18.8
				108	54	17.8	17.8	17.8	0	18.5	18.1	18.1	18.1	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						507000	507000	507000	MPR	Tune-up Limit	507000	507000	507000	MPR	Tune-up Limit
30	DFT-s	15	$\pi/2$ BPSK	1	1	17.8	17.8	17.8	0	18.5	18.2	18.2	18.2	0	18.8
				1	79	17.7	17.7	17.7	0	18.5	18.2	18.2	18.2	0	18.8
				1	158	17.7	17.7	17.7	0	18.5	18.2	18.2	18.2	0	18.8
				80	40	17.6	17.6	17.6	0	18.5	18.2	18.2	18.2	0	18.8
			QPSK	1	1	17.8	17.8	17.8	0	18.5	18.1	18.1	18.1	0	18.8
				1	79	17.7	17.7	17.7	0	18.5	18.1	18.1	18.1	0	18.8
				1	158	17.9	17.9	17.9	0	18.5	18.3	18.3	18.3	0	18.8
				80	40	17.6	17.6	17.6	0	18.5	18.3	18.3	18.3	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						507000	507000	507000	MPR	Tune-up Limit	507000	507000	507000	MPR	Tune-up Limit
25	DFT-s	15	$\pi/2$ BPSK	1	1	17.9	17.9	17.9	0	18.5	18.2	18.2	18.2	0	18.8
				1	66	17.8	17.8	17.8	0	18.5	18.2	18.2	18.2	0	18.8
				1	131	17.8	17.8	17.8	0	18.5	18.2	18.2	18.2	0	18.8
				64	32	17.8	17.8	17.8	0	18.5	18.1	18.1	18.1	0	18.8
			QPSK	1	1	17.8	17.8	17.8	0	18.5	18.1	18.1	18.1	0	18.8
				1	66	17.7	17.7	17.7	0	18.5	18.3	18.3	18.3	0	18.8
				1	131	17.8	17.8	17.8	0	18.5	18.3	18.3	18.3	0	18.8
				64	32	17.7	17.7	17.7	0	18.5	18.3	18.3	18.3	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						502000	507000	512000	MPR	Tune-up Limit	502000	507000	512000	MPR	Tune-up Limit
20	DFT-s	15	$\pi/2$ BPSK	1	1	17.7	17.8	17.9	0	18.5	18.0	17.9	18.0	0	18.8
				1	52	17.7	17.8	17.9	0	18.5	18.0	18.1	18.0	0	18.8
				1	104	17.9	17.9	17.9	0	18.5	18.0	18.0	17.9	0	18.8
				50	25	17.8	17.8	17.8	0	18.5	18.1	18.0	18.1	0	18.8
			QPSK	1	1	17.7	17.7	17.8	0	18.5	18.0	18.1	17.9	0	18.8
				1	52	17.8	17.8	17.9	0	18.5	18.0	18.1	18.0	0	18.8
				1	104	17.9	17.9	17.8	0	18.5	17.9	18.1	18.0	0	18.8
				50	25	17.7	17.7	17.6	0	18.5	18.1	18.1	18.1	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501500	507000	512500	MPR	Tune-up Limit	501500	507000	512500	MPR	Tune-up Limit
15	DFT-s	15	$\pi/2$ BPSK	1	1	17.7	17.8	17.7	0	18.5	18.1	18.1	17.9	0	18.8
				1	39	17.7	17.7	17.7	0	18.5	18.1	18.1	18.0	0	18.8
				1	77	17.9	17.7	17.8	0	18.5	18.0	18.0	18.0	0	18.8
				36	18	17.6	17.7	17.6	0	18.5	18.0	18.0	17.9	0	18.8
			QPSK	1	1	17.8	17.8	17.7	0	18.5	18.0	18.1	17.9	0	18.8
				1	39	17.9	17.7	17.7	0	18.5	17.9	18.0	17.9	0	18.8
				1	77	18.0	17.8	17.8	0	18.5	17.9	17.9	18.0	0	18.8
				36	18	17.9	17.6	17.7	0	18.5	18.0	17.9	17.9	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501000	507000	513000	MPR	Tune-up Limit	501000	507000	513000	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	18.0	17.9	17.8	0	18.5	18.0	17.9	18.0	0	18.8
				1	25	18.0	17.8	17.7	0	18.5	18.0	18.1	18.0	0	18.8
				1	50	18.0	17.8	18.0	0	18.5	18.0	18.0	17.9	0	18.8
				25	12	17.8	17.6	17.6	0	18.5	18.1	18.0	18.1	0	18.8
			QPSK	1	1	17.8	17.8	17.7	0	18.5	18.0	18.1	17.9	0	18.8
				1	25	17.8	17.7	17.7	0	18.5	18.0	18.1	18.0	0	18.8
				1	50	17.9	17.7	17.9	0	18.5	17.9	18.1	18.0	0	18.8
				25	12	17.8	17.7	17.7	0	18.5	18.1	18.1	18.1	0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						500500	507000	513500	MPR	Tune-up Limit	500500	507000	513500	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	17.9	17.9	17.8	0	18.5	18.0	17.9	18.0	0	18.8
				1	12	17.9	17.8	17.6	0	18.5	18.1	18.0	18.0	0	18.8
				1	23	18.0	17.9	17.6	0	18.5	18.1	18.1	17.9	0	18.8
				12	6	17.7	17.6	17.4	0	18.5	18.1	18.1	18.0	0	18.8
			QPSK	1	1	17.8	17.7	17.4	0	18.5	17.9	18.1	17.9	0	18.8
				1	12	17.8	17.7	17.6	0	18.5	18.1	18.0	17.9	0	18.8
				1	23	17.9	17.8	17.9	0	18.5	18.0	18.1	18.1	0	18.8
				12	6	17.8	17.6	17.7	0	18.5	18.1	17.9	18.1	0	18.8

NR Band 7 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							507000		MPR	Tune-up Limit		507000		MPR	Tune-up Limit		
							2535 MHz			2535 MHz		2535 MHz			2535 MHz		
40	DFT-s	15	π/2 BPSK	1	1		22.6		0	23.3		16.8		0	17.1		
				1	107		22.8		0	23.3		16.9		0	17.1		
				1	214		22.7		0	23.3		16.8		0	17.1		
				108	54		22.8		0	23.3		16.9		0	17.1		
			QPSK	1	1		22.6		0	23.3		16.8		0	17.1		
				1	107		22.7		0	23.3		16.8		0	17.1		
				1	214		22.8		0	23.3		16.8		0	17.1		
				108	54		22.6		0	23.3		16.8		0	17.1		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							507000		MPR	Tune-up Limit		507000		MPR	Tune-up Limit		
							2535 MHz			2535 MHz		2535 MHz			2535 MHz		
30	DFT-s	15	π/2 BPSK	1	1		22.7		0	23.3		16.6		0	17.1		
				1	79		22.6		0	23.3		16.6		0	17.1		
				1	158		22.6		0	23.3		16.6		0	17.1		
				80	40		22.6		0	23.3		16.5		0	17.1		
			QPSK	1	1		22.7		0	23.3		16.6		0	17.1		
				1	79		22.7		0	23.3		16.6		0	17.1		
				1	158		22.6		0	23.3		16.6		0	17.1		
				80	40		22.6		0	23.3		16.6		0	17.1		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							507000		MPR	Tune-up Limit		507000		MPR	Tune-up Limit		
							2535 MHz			2535 MHz		2535 MHz			2535 MHz		
25	DFT-s	15	π/2 BPSK	1	1		22.6		0	23.3		16.6		0	17.1		
				1	66		22.5		0	23.3		16.5		0	17.1		
				1	131		22.5		0	23.3		16.5		0	17.1		
				64	32		22.5		0	23.3		16.5		0	17.1		
			QPSK	1	1		22.5		0	23.3		16.6		0	17.1		
				1	66		22.5		0	23.3		16.5		0	17.1		
				1	131		22.5		0	23.3		16.5		0	17.1		
				64	32		22.6		0	23.3		16.5		0	17.1		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							507000		MPR	Tune-up Limit		507000		MPR	Tune-up Limit		
							2510 MHz			2535 MHz		2560 MHz			2510 MHz	2535 MHz	2560 MHz
20	DFT-s	15	π/2 BPSK	1	1		22.6	22.7	22.6	0	23.3	16.5	16.9	16.7	0	17.1	
				1	52		22.7	22.6	22.6	0	23.3	16.9	16.9	16.7	0	17.1	
				1	104		22.7	22.6	22.7	0	23.3	16.9	16.8	16.8	0	17.1	
				50	25		22.7	22.7	22.8	0	23.3	16.9	16.9	16.8	0	17.1	
			QPSK	1	1		22.7	22.8	22.6	0	23.3	16.6	16.5	16.7	0	17.1	
				1	52		22.8	22.7	22.7	0	23.3	16.8	16.5	16.7	0	17.1	
				1	104		22.8	22.6	22.9	0	23.3	17.0	16.5	17.0	0	17.1	
				50	25		22.7	22.7	22.7	0	23.3	16.9	16.5	16.8	0	17.1	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							501500	507000	512500	MPR	Tune-up Limit		501500	507000	512500	MPR	Tune-up Limit
							2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz		2535 MHz	2562.5 MHz			
15	DFT-s	15	π/2 BPSK	1	1		22.5	22.7	22.5	0	23.3	16.7	16.9	16.7	0	17.1	
				1	39		22.6	22.6	22.7	0	23.3	16.8	16.8	16.8	0	17.1	
				1	77		22.7	22.5	22.7	0	23.3	16.8	16.8	16.7	0	17.1	
				36	18		22.6	22.6	22.5	0	23.3	16.9	16.9	16.8	0	17.1	
			QPSK	1	1		22.5	22.7	22.5	0	23.3	16.8	16.8	16.8	0	17.1	
				1	39		22.6	22.6	22.5	0	23.3	16.9	16.9	16.8	0	17.1	
				1	77		22.7	22.6	22.7	0	23.3	16.8	16.9	16.8	0	17.1	
				36	18		22.7	22.7	22.6	0	23.3	16.9	16.9	16.9	0	17.1	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							501000	507000	513000	MPR	Tune-up Limit		501000	507000	513000	MPR	Tune-up Limit
							2505 MHz	2535 MHz	2565 MHz		2505 MHz		2535 MHz	2565 MHz			
10	DFT-s	15	π/2 BPSK	1	1		22.2	22.6	22.3	0	23.3	16.8	16.7	16.7	0	17.1	
				1	25		22.6	22.5	22.4	0	23.3	16.9	16.7	16.7	0	17.1	
				1	50		22.6	22.7	22.3	0	23.3	16.8	16.8	16.9	0	17.1	
				25	12		22.4	22.5	22.4	0	23.3	16.7	16.8	16.7	0	17.1	
			QPSK	1	1		22.2	22.6	22.3	0	23.3	16.8	16.7	16.8	0	17.1	
				1	25		22.5	22.6	22.4	0	23.3	16.7	16.8	16.9	0	17.1	
				1	50		22.6	22.5	22.3	0	23.3	16.8	16.9	16.9	0	17.1	
				25	12		22.4	22.5	22.4	0	23.3	16.7	16.9	16.7	0	17.1	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							500500	507000	513500	MPR	Tune-up Limit		500500	507000	513500	MPR	Tune-up Limit
							2502.5 MHz	2535 MHz	2567.5 MHz		2502.5 MHz		2535 MHz	2567.5 MHz			
5	DFT-s	15	π/2 BPSK	1	1		22.4	22.4	22.4	0	23.3	16.7	16.8	16.7	0	17.1	
				1	12		22.6	22.5	22.5	0	23.3	16.8	16.8	16.7	0	17.1	
				1	23		22.4	22.5	22.5	0	23.3	16.7	16.7	16.9	0	17.1	
				12	6		22.5	22.4	22.5	0	23.3	16.7	16.7	16.8	0	17.1	
			QPSK	1	1		22.4	22.6	22.5	0	23.3	16.8	16.7	16.7	0	17.1	
				1	12		22.4	22.4	22.5	0	23.3	16.9	16.8	16.8	0	17.1	
				1	23		22.4	22.4	22.4	0	23.3	16.8	16.7	16.9	0	17.1	
				12	6		22.4	22.4	22.5	0	23.3	16.7	16.9	16.9	0	17.1	

NR Band 7 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
40	DFT-s	15	π/2 BPSK	1	1		19.0		0	19.5		20.1		0	20.4
				1	107		19.2		0	19.5		20.3		0	20.4
				1	214		18.9		0	19.5		20.3		0	20.4
				108	54		19.2		0	19.5		20.2		0	20.4
			QPSK	1	1		19.0		0	19.5		20.1		0	20.4
				1	107		18.8		0	19.5		20.1		0	20.4
				1	214		18.9		0	19.5		20.1		0	20.4
				108	54		18.8		0	19.5		20.1		0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
30	DFT-s	15	π/2 BPSK	1	1		18.9		0	19.5		20.0		0	20.4
				1	79		18.9		0	19.5		20.0		0	20.4
				1	158		18.9		0	19.5		20.0		0	20.4
				80	40		18.8		0	19.5		20.0		0	20.4
			QPSK	1	1		18.9		0	19.5		20.1		0	20.4
				1	79		18.9		0	19.5		20.1		0	20.4
				1	158		18.9		0	19.5		20.1		0	20.4
				80	40		18.9		0	19.5		20.0		0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							507000 2535 MHz		MPR	Tune-up Limit		507000 2535 MHz		MPR	Tune-up Limit
25	DFT-s	15	π/2 BPSK	1	1		18.7		0	19.5		20.2		0	20.4
				1	66		18.8		0	19.5		19.9		0	20.4
				1	131		18.9		0	19.5		20.0		0	20.4
				64	32		18.8		0	19.5		20.0		0	20.4
			QPSK	1	1		18.9		0	19.5		20.0		0	20.4
				1	66		18.8		0	19.5		20.0		0	20.4
				1	131		18.8		0	19.5		20.1		0	20.4
				64	32		18.8		0	19.5		20.0		0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						502000 2510 MHz	507000 2535 MHz	512000 2560 MHz	MPR	Tune-up Limit	502000 2510 MHz	507000 2535 MHz	512000 2560 MHz	MPR	Tune-up Limit
20	DFT-s	15	π/2 BPSK	1	1	18.5	18.9	18.7	0	19.5	19.9	20.0	19.8	0	20.4
				1	52	18.8	18.8	18.8	0	19.5	20.0	20.0	19.9	0	20.4
				1	104	18.8	18.9	18.6	0	19.5	20.0	20.1	19.9	0	20.4
				50	25	18.8	18.8	18.5	0	19.5	19.9	20.0	19.8	0	20.4
			QPSK	1	1	18.6	18.9	18.9	0	19.5	19.9	20.0	19.9	0	20.4
				1	52	18.8	18.8	18.9	0	19.5	19.9	20.0	19.8	0	20.4
				1	104	18.8	18.8	18.8	0	19.5	19.9	20.1	20.0	0	20.4
				50	25	18.8	18.8	18.8	0	19.5	20.0	20.0	20.0	0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501500 2507.5 MHz	507000 2535 MHz	512500 2562.5 MHz	MPR	Tune-up Limit	501500 2507.5 MHz	507000 2535 MHz	512500 2562.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1	18.6	18.7	18.9	0	19.5	19.8	19.9	19.9	0	20.4
				1	39	18.6	18.8	18.8	0	19.5	19.9	19.9	20.0	0	20.4
				1	77	18.8	18.9	18.7	0	19.5	20.1	20.1	20.0	0	20.4
				36	18	18.6	18.7	18.8	0	19.5	19.8	19.9	19.9	0	20.4
			QPSK	1	1	18.6	18.8	18.9	0	19.5	19.8	20.1	20.2	0	20.4
				1	39	18.8	18.9	18.8	0	19.5	20.0	20.0	20.1	0	20.4
				1	77	18.9	18.8	18.9	0	19.5	20.1	20.1	20.0	0	20.4
				36	18	18.7	18.8	18.8	0	19.5	19.9	20.0	20.0	0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						501000 2505 MHz	507000 2535 MHz	513000 2565 MHz	MPR	Tune-up Limit	501000 2505 MHz	507000 2535 MHz	513000 2565 MHz	MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1	18.5	18.8	18.8	0	19.5	19.7	19.8	20.0	0	20.4
				1	25	18.5	18.7	18.8	0	19.5	19.8	19.8	20.1	0	20.4
				1	50	18.6	18.8	18.8	0	19.5	19.8	20.1	20.1	0	20.4
				25	12	18.5	18.7	18.8	0	19.5	19.8	19.8	20.0	0	20.4
			QPSK	1	1	18.5	18.6	18.9	0	19.5	19.8	20.0	20.1	0	20.4
				1	25	18.6	18.7	18.9	0	19.5	19.9	19.8	20.0	0	20.4
				1	50	18.7	18.7	18.9	0	19.5	20.0	20.0	20.1	0	20.4
				25	12	18.6	18.6	18.9	0	19.5	19.8	19.9	20.0	0	20.4
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						500500 2502.5 MHz	507000 2535 MHz	513500 2567.5 MHz	MPR	Tune-up Limit	500500 2502.5 MHz	507000 2535 MHz	513500 2567.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	18.6	18.7	18.8	0	19.5	19.8	19.9	20.0	0	20.4
				1	12	18.6	18.6	18.8	0	19.5	19.8	19.8	20.0	0	20.4
				1	23	18.8	18.8	18.8	0	19.5	19.9	20.0	20.0	0	20.4
				12	6	18.7	18.6	18.8	0	19.5	19.9	19.9	20.0	0	20.4
			QPSK	1	1	18.7	18.7	18.8	0	19.5	19.8	19.9	20.1	0	20.4
				1	12	18.6	18.8	18.8	0	19.5	19.9	19.8	20.1	0	20.4
				1	23	18.8	18.7	18.9	0	19.5	20.0	19.9	20.1	0	20.4
				12	6	18.6	18.7	18.8	0	19.5	19.9	19.9	20.1	0	20.4

NR Band 12 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							141500 707.5 MHz		MPR	Tune-up Limit		141500 707.5 MHz		MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1		24.7		0	25.7		24.7		0	25.7
				1	39		24.9		0	25.7		24.9		0	25.7
				1	77		24.7		0	25.7		24.7		0	25.7
				36	18		24.7		0	25.7		24.7		0	25.7
			QPSK	1	1		24.7		0	25.7		24.7		0	25.7
				1	39		24.5		0	25.7		24.5		0	25.7
				1	77		24.7		0	25.7		24.7		0	25.7
				36	18		24.7		0	25.7		24.7		0	25.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							141500 707.5 MHz		MPR	Tune-up Limit		141500 707.5 MHz		MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1		24.7		0	25.7		24.7		0	25.7
				1	25		24.7		0	25.7		24.7		0	25.7
				1	50		24.6		0	25.7		24.6		0	25.7
				25	12		24.5		0	25.7		24.5		0	25.7
			QPSK	1	1		24.7		0	25.7		24.7		0	25.7
				1	25		24.6		0	25.7		24.6		0	25.7
				1	50		24.6		0	25.7		24.6		0	25.7
				25	12		24.7		0	25.7		24.7		0	25.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
						140300	141500	142700	MPR	Tune-up Limit	140300	141500	142700	MPR	Tune-up Limit
						701.5 MHz	707.5 MHz	713.5 MHz			701.5 MHz	707.5 MHz	713.5 MHz		
5	DFT-s	15	π/2 BPSK	1	1	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7
				1	12	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7
				1	23	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7
				12	6	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7
			QPSK	1	1	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7
				1	12	24.7	24.7	24.5	0	25.7	24.7	24.7	24.5	0	25.7
				1	23	24.7	24.7	24.5	0	25.7	24.7	24.7	24.5	0	25.7
				12	6	24.7	24.6	24.5	0	25.7	24.7	24.6	24.5	0	25.7

NR Band 12 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							141500 707.5 MHz		MPR	Tune-up Limit		141500 707.5 MHz		MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1		23.8		0	24.3		23.9		0	24.7
				1	39		23.9		0	24.3		24.1		0	24.7
				1	77		23.6		0	24.3		24.0		0	24.7
				36	18		23.8		0	24.3		24.0		0	24.7
			QPSK	1	1		23.7		0	24.3		24.0		0	24.7
				1	39		23.6		0	24.3		24.0		0	24.7
				1	77		23.8		0	24.3		23.9		0	24.7
				36	18		23.6		0	24.3		24.0		0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							141500 707.5 MHz		MPR	Tune-up Limit		141500 707.5 MHz		MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1		23.5		0	24.3		24.0		0	24.7
				1	25		23.4		0	24.3		23.9		0	24.7
				1	50		23.6		0	24.3		24.0		0	24.7
				25	12		23.6		0	24.3		24.0		0	24.7
			QPSK	1	1		23.7		0	24.3		24.0		0	24.7
				1	25		23.5		0	24.3		24.0		0	24.7
				1	50		23.6		0	24.3		24.1		0	24.7
				25	12		23.7		0	24.3		24.0		0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						140300 701.5 MHz	141500 707.5 MHz	142700 713.5 MHz	MPR	Tune-up Limit	140300 701.5 MHz	141500 707.5 MHz	142700 713.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	23.8	23.7	23.5	0	24.3	24.1	24.0	24.1	0	24.7
				1	12	23.5	23.5	23.4	0	24.3	24.1	24.0	24.0	0	24.7
				1	23	23.4	23.8	23.5	0	24.3	24.0	24.0	24.0	0	24.7
				12	6	23.7	23.6	23.7	0	24.3	24.1	24.0	24.1	0	24.7
			QPSK	1	1	23.6	23.7	23.5	0	24.3	24.1	24.0	24.0	0	24.7
				1	12	23.5	23.6	23.6	0	24.3	24.1	24.0	24.0	0	24.7
				1	23	23.7	23.6	23.5	0	24.3	24.0	24.0	24.0	0	24.7
				12	6	23.6	23.7	23.5	0	24.3	24.1	24.0	24.1	0	24.7

NR Band 14 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						158600		MPR	Tune-up Limit	158600		MPR	Tune-up Limit
						793 MHz				793 MHz			
10	DFT-s	15	$\pi/2$ BPSK	1	1	24.9		0	25.7	24.9		0	25.7
				1	25	25.1		0	25.7	25.0		0	25.7
				1	50	24.9		0	25.7	24.9		0	25.7
				25	12	24.9		0	25.7	24.9		0	25.7
			QPSK	1	1	24.9		0	25.7	24.9		0	25.7
				1	25	25.0		0	25.7	25.0		0	25.7
				1	50	25.1		0	25.7	25.1		0	25.7
				25	12	24.9		0	25.7	24.9		0	25.7
5	DFT-s	15	$\pi/2$ BPSK	1	1	25.0		0	25.7	25.0		0	25.7
				1	12	25.0		0	25.7	25.0		0	25.7
				1	23	25.0		0	25.7	25.0		0	25.7
				12	6	25.0		0	25.7	25.0		0	25.7
			QPSK	1	1	25.2		0	25.7	25.2		0	25.7
				1	12	25.1		0	25.7	25.1		0	25.7
				1	23	25.1		0	25.7	25.1		0	25.7
				12	6	25.1		0	25.7	25.1		0	25.7

NR Band 14 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						158600		MPR	Tune-up Limit	158600		MPR	Tune-up Limit
						793 MHz				793 MHz			
10	DFT-s	15	$\pi/2$ BPSK	1	1	24.0		0	24.5	24.1		0	24.7
				1	25	24.0		0	24.5	24.1		0	24.7
				1	50	23.8		0	24.5	24.0		0	24.7
				25	12	23.9		0	24.5	24.1		0	24.7
			QPSK	1	1	24.0		0	24.5	24.1		0	24.7
				1	25	24.0		0	24.5	24.0		0	24.7
				1	50	23.9		0	24.5	24.1		0	24.7
				25	12	23.9		0	24.5	24.0		0	24.7
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.0		0	24.5	24.1		0	24.7
				1	12	24.0		0	24.5	24.0		0	24.7
				1	23	24.0		0	24.5	24.0		0	24.7
				12	6	23.9		0	24.5	24.0		0	24.7
			QPSK	1	1	24.0		0	24.5	24.1		0	24.7
				1	12	24.0		0	24.5	24.1		0	24.7
				1	23	23.9		0	24.5	23.9		0	24.7
				12	6	23.8		0	24.5	23.9		0	24.7

NR Band 25 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500			MPR	Tune-up Limit		376500			MPR	Tune-up Limit
							1882.5 MHz						1882.5 MHz				
40	DFT-s	15	π/2 BPSK	1	1		25.1			0	25.7		18.2			0	19
				1	107		25.2			0	25.7		18.4			0	19
				1	214		25.0			0	25.7		18.4			0	19
				108	54		24.9			0	25.7		18.4			0	19
			QPSK	1	1		25.0			0	25.7		18.3			0	19
				1	107		25.0			0	25.7		18.3			0	19
				1	214		25.0			0	25.7		18.2			0	19
				108	54		24.9			0	25.7		18.3			0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500			MPR	Tune-up Limit		376500			MPR	Tune-up Limit
							1882.5 MHz						1882.5 MHz				
30	DFT-s	15	π/2 BPSK	1	1		24.9			0	25.7		18.2			0	19
				1	79		24.9			0	25.7		18.2			0	19
				1	158		24.9			0	25.7		18.2			0	19
				80	40		24.9			0	25.7		18.1			0	19
			QPSK	1	1		24.9			0	25.7		18.2			0	19
				1	79		24.9			0	25.7		18.2			0	19
				1	158		24.9			0	25.7		18.2			0	19
				80	40		24.9			0	25.7		18.2			0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500			MPR	Tune-up Limit		376500			MPR	Tune-up Limit
							1882.5 MHz						1882.5 MHz				
25	DFT-s	15	π/2 BPSK	1	1		24.9			0	25.7		18.1			0	19
				1	66		24.8			0	25.7		18.1			0	19
				1	131		25.0			0	25.7		18.2			0	19
				64	32		25.1			0	25.7		18.2			0	19
			QPSK	1	1		25.1			0	25.7		18.3			0	19
				1	66		25.1			0	25.7		18.2			0	19
				1	131		25.0			0	25.7		18.2			0	19
				64	32		25.1			0	25.7		18.2			0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500			MPR	Tune-up Limit		376500			MPR	Tune-up Limit
							1860 MHz	1882.5 MHz	1905 MHz				1860 MHz	1882.5 MHz	1905 MHz		
20	DFT-s	15	π/2 BPSK	1	1	25.0	25.1	25.1	0	25.7	18.3	18.3	18.3	0	19		
				1	52	25.0	25.0	25.0	0	25.7	18.2	18.2	18.3	0	19		
				1	104	25.1	25.1	25.0	0	25.7	18.3	18.2	18.2	0	19		
				50	25	25.0	25.0	25.0	0	25.7	18.2	18.2	18.2	0	19		
			QPSK	1	1	25.1	25.0	25.0	0	25.7	18.3	18.3	18.2	0	19		
				1	52	25.1	25.1	25.0	0	25.7	18.2	18.2	18.2	0	19		
				1	104	25.1	25.1	25.0	0	25.7	18.3	18.2	18.2	0	19		
				50	25	25.0	25.0	25.0	0	25.7	18.2	18.2	18.2	0	19		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							371500	376500	381500		Tune-up Limit		371500	376500	381500		Tune-up Limit
							1857.5 MHz	1882.5 MHz	1907.5 MHz				1857.5 MHz	1882.5 MHz	1907.5 MHz		
15	DFT-s	15	π/2 BPSK	1	1	24.8	25.2	25.1	0	25.7	18.4	18.3	18.3	0	19		
				1	39	24.8	25.0	25.1	0	25.7	18.3	18.2	18.2	0	19		
				1	77	25.1	25.1	25.1	0	25.7	18.3	18.2	18.2	0	19		
				36	18	25.0	25.0	25.0	0	25.7	18.2	18.2	18.2	0	19		
			QPSK	1	1	24.8	25.2	25.1	0	25.7	18.4	18.4	18.3	0	19		
				1	39	25.1	25.1	25.1	0	25.7	18.3	18.3	18.3	0	19		
				1	77	25.2	25.1	25.1	0	25.7	18.3	18.3	18.2	0	19		
				36	18	25.1	25.1	25.2	0	25.7	18.2	18.2	18.3	0	19		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							371000	376500	382000		Tune-up Limit		371000	376500	382000		Tune-up Limit
							1855 MHz	1882.5 MHz	1910 MHz				1855 MHz	1882.5 MHz	1910 MHz		
10	DFT-s	15	π/2 BPSK	1	1	24.9	25.0	25.1	0	25.7	18.2	18.1	18.2	0	19		
				1	25	24.9	25.0	25.1	0	25.7	18.1	18.1	18.3	0	19		
				1	50	24.9	24.9	25.0	0	25.7	18.3	18.1	18.2	0	19		
				25	12	24.9	24.9	25.0	0	25.7	18.3	18.1	18.1	0	19		
			QPSK	1	1	24.9	25.0	25.0	0	25.7	18.4	18.1	18.2	0	19		
				1	25	24.9	25.0	25.0	0	25.7	18.4	18.1	18.2	0	19		
				1	50	24.8	24.9	25.0	0	25.7	18.3	18.1	18.3	0	19		
				25	12	25.0	25.0	25.0	0	25.7	18.4	18.1	18.1	0	19		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							370500	376500	382500		Tune-up Limit		370500	376500	382500		Tune-up Limit
							1852.5 MHz	1882.5 MHz	1912.5 MHz				1852.5 MHz	1882.5 MHz	1912.5 MHz		
5	DFT-s	15	π/2 BPSK	1	1	25.0	25.0	25.0	0	25.7	18.0	18.0	18.1	0	19		
				1	12	24.9	24.9	25.0	0	25.7	17.9	18.0	18.1	0	19		
				1	23	25.0	24.9	25.0	0	25.7	18.0	18.0	18.1	0	19		
				12	6	24.9	24.9	25.0	0	25.7	18.0	18.0	18.1	0	19		
			QPSK	1	1	25.0	25.0	25.0	0	25.7	18.0	18.0	18.1	0	19		
				1	12	25.0	24.9	25.0	0	25.7	18.0	18.0	18.1	0	19		
				1	23	25.0	25.0	25.0	0	25.7	18.0	18.0	18.1	0	19		
				12	6	24.9	24.9	25.0	0	25.7	18.0	18.0	18.1	0	19		

NR Band 25 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit		
40	DFT-s	15	π/2 BPSK	1	1		20.8		0	21.5		21.0		0	21.7		
				1	107		20.9		0	21.5		21.0		0	21.7		
				1	214		20.7		0	21.5		20.9		0	21.7		
				108	54		20.8		0	21.5		21.0		0	21.7		
			QPSK	1	1		20.7		0	21.5		21.0		0	21.7		
				1	107		20.7		0	21.5		21.0		0	21.7		
				1	214		20.6		0	21.5		20.9		0	21.7		
				108	54		20.7		0	21.5		21.0		0	21.7		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit		
30	DFT-s	15	π/2 BPSK	1	1		20.7		0	21.5		20.8		0	21.7		
				1	79		20.6		0	21.5		20.9		0	21.7		
				1	158		20.6		0	21.5		21.0		0	21.7		
				80	40		20.7		0	21.5		20.9		0	21.7		
			QPSK	1	1		20.7		0	21.5		21.0		0	21.7		
				1	79		20.6		0	21.5		20.8		0	21.7		
				1	158		20.6		0	21.5		20.9		0	21.7		
				80	40		20.7		0	21.5		20.8		0	21.7		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit		
25	DFT-s	15	π/2 BPSK	1	1		20.6		0	21.5		20.8		0	21.7		
				1	66		20.6		0	21.5		20.8		0	21.7		
				1	131		20.6		0	21.5		21.0		0	21.7		
				64	32		20.5		0	21.5		20.8		0	21.7		
			QPSK	1	1		20.7		0	21.5		20.8		0	21.7		
				1	66		20.6		0	21.5		20.9		0	21.7		
				1	131		20.5		0	21.5		20.9		0	21.7		
				64	32		20.6		0	21.5		20.8		0	21.7		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit		
20	DFT-s	15	π/2 BPSK	1	1		20.8	20.7	20.8	0	21.5		20.8	20.8	21.0	0	21.7
				1	52		20.7	20.7	20.7	0	21.5		20.8	20.8	20.9	0	21.7
				1	104		20.7	20.6	20.6	0	21.5		21.0	20.8	20.9	0	21.7
				50	25		20.7	20.6	20.6	0	21.5		20.8	20.8	21.0	0	21.7
			QPSK	1	1		20.7	20.7	20.7	0	21.5		20.8	20.8	21.0	0	21.7
				1	52		20.6	20.7	20.6	0	21.5		20.8	21.0	20.9	0	21.7
				1	104		20.7	20.6	20.7	0	21.5		20.8	20.8	20.8	0	21.7
				50	25		20.7	20.7	20.6	0	21.5		20.9	21.0	21.0	0	21.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							371500 1857.5 MHz	376500 1882.5 MHz	381500 1907.5 MHz	MPR	Tune-up Limit		371500 1857.5 MHz	376500 1882.5 MHz	381500 1907.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1		20.7	20.7	20.7	0	21.5		20.9	20.8	21.0	0	21.7
				1	39		20.7	20.6	20.7	0	21.5		20.8	20.9	21.0	0	21.7
				1	77		20.7	20.7	20.5	0	21.5		21.0	21.0	21.0	0	21.7
				36	18		20.6	20.7	20.5	0	21.5		20.9	20.8	20.9	0	21.7
			QPSK	1	1		20.7	20.7	20.6	0	21.5		20.8	20.9	21.0	0	21.7
				1	39		20.7	20.6	20.6	0	21.5		20.9	20.9	20.9	0	21.7
				1	77		20.7	20.6	20.5	0	21.5		20.9	20.9	21.0	0	21.7
				36	18		20.6	20.7	20.7	0	21.5		20.8	20.9	20.9	0	21.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							371000 1855 MHz	376500 1882.5 MHz	382000 1912.5 MHz	MPR	Tune-up Limit		371000 1855 MHz	376500 1882.5 MHz	382000 1912.5 MHz	MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1		20.5	20.5	20.6	0	21.5		21.0	20.9	20.8	0	21.7
				1	25		20.7	20.7	20.7	0	21.5		21.0	21.0	20.8	0	21.7
				1	50		20.6	20.7	20.6	0	21.5		20.9	20.9	20.8	0	21.7
				25	12		20.7	20.5	20.7	0	21.5		20.9	20.8	21.0	0	21.7
			QPSK	1	1		20.7	20.7	20.6	0	21.5		21.0	20.9	20.9	0	21.7
				1	25		20.7	20.7	20.6	0	21.5		20.9	20.8	20.9	0	21.7
				1	50		20.7	20.5	20.7	0	21.5		21.0	20.8	20.8	0	21.7
				25	12		20.7	20.7	20.6	0	21.5		20.8	20.8	20.9	0	21.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
							370500 1852.5 MHz	376500 1882.5 MHz	382500 1912.5 MHz	MPR	Tune-up Limit		370500 1852.5 MHz	376500 1882.5 MHz	382500 1912.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1		20.5	20.6	20.7	0	21.5		20.8	21.0	21.0	0	21.7
				1	12		20.6	20.7	20.6	0	21.5		20.8	20.9	20.9	0	21.7
				1	23		20.6	20.7	20.6	0	21.5		20.8	20.9	21.0	0	21.7
				12	6		20.7	20.5	20.7	0	21.5		20.8	20.8	20.9	0	21.7
			QPSK	1	1		20.6	20.6	20.7	0	21.5		20.9	20.9	20.8	0	21.7
				1	12		20.7	20.7	20.7	0	21.5		21.0	20.9	20.8	0	21.7
				1	23		20.7	20.5	20.7	0	21.5		20.8	20.8	20.8	0	21.7
				12	6		20.7	20.7	20.6	0	21.5		20.9	20.8	20.9	0	21.7

NR Band 25 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit
40	DFT-s	15	π/2 BPSK	1	1		24.3		0	24.8		20.5		0	20.8
				1	107		24.3		0	24.8		20.6		0	20.8
				1	214		24.2		0	24.8		20.5		0	20.8
				108	54		24.3		0	24.8		20.6		0	20.8
			QPSK	1	1		24.2		0	24.8		20.5		0	20.8
				1	107		24.2		0	24.8		20.5		0	20.8
				1	214		24.2		0	24.8		20.5		0	20.8
				108	54		24.3		0	24.8		20.5		0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit
30	DFT-s	15	π/2 BPSK	1	1		24.2		0	24.8		20.1		0	20.8
				1	79		24.2		0	24.8		20.2		0	20.8
				1	158		24.3		0	24.8		20.2		0	20.8
				80	40		24.2		0	24.8		20.2		0	20.8
			QPSK	1	1		24.2		0	24.8		20.3		0	20.8
				1	79		24.3		0	24.8		20.2		0	20.8
				1	158		24.2		0	24.8		20.2		0	20.8
				80	40		24.2		0	24.8		20.2		0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							376500 1882.5 MHz		MPR	Tune-up Limit		376500 1882.5 MHz		MPR	Tune-up Limit
25	DFT-s	15	π/2 BPSK	1	1		23.9		0	24.8		20.1		0	20.8
				1	66		23.9		0	24.8		20.1		0	20.8
				1	131		24.0		0	24.8		20.2		0	20.8
				64	32		24.0		0	24.8		20.1		0	20.8
			QPSK	1	1		24.0		0	24.8		20.2		0	20.8
				1	66		23.9		0	24.8		20.1		0	20.8
				1	131		24.0		0	24.8		20.2		0	20.8
				64	32		23.9		0	24.8		20.1		0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						372000 1860 MHz	376500 1882.5 MHz	381000 1905 MHz	MPR	Tune-up Limit	372000 1860 MHz	376500 1882.5 MHz	381000 1905 MHz	MPR	Tune-up Limit
20	DFT-s	15	π/2 BPSK	1	1	24.1	24.0	24.0	0	24.8	20.2	20.3	20.2	0	20.8
				1	52	24.2	24.0	24.1	0	24.8	20.2	20.2	20.3	0	20.8
				1	104	24.2	23.9	24.1	0	24.8	20.3	20.2	20.4	0	20.8
				50	25	24.0	23.9	24.0	0	24.8	20.2	20.2	20.3	0	20.8
			QPSK	1	1	24.2	24.0	24.0	0	24.8	20.3	20.1	20.2	0	20.8
				1	52	24.2	23.9	24.2	0	24.8	20.3	20.1	20.4	0	20.8
				1	104	24.2	24.0	24.2	0	24.8	20.2	20.1	20.4	0	20.8
				50	25	24.1	24.0	24.1	0	24.8	20.2	20.2	20.2	0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						371500 1857.5 MHz	376500 1882.5 MHz	381500 1907.5 MHz	MPR	Tune-up Limit	371500 1857.5 MHz	376500 1882.5 MHz	381500 1907.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1	24.1	24.0	24.1	0	24.8	20.3	20.5	20.2	0	20.8
				1	39	24.1	24.2	24.2	0	24.8	20.2	20.4	20.4	0	20.8
				1	77	24.2	24.2	24.2	0	24.8	20.4	20.4	20.4	0	20.8
				36	18	24.1	24.1	24.0	0	24.8	20.1	20.3	20.2	0	20.8
			QPSK	1	1	24.1	24.2	24.0	0	24.8	20.2	20.3	20.2	0	20.8
				1	39	24.1	24.1	24.2	0	24.8	20.1	20.2	20.3	0	20.8
				1	77	24.2	24.1	24.1	0	24.8	20.3	20.2	20.4	0	20.8
				36	18	24.1	24.0	24.0	0	24.8	20.2	20.2	20.3	0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						371000 1855 MHz	376500 1882.5 MHz	382000 1910 MHz	MPR	Tune-up Limit	371000 1855 MHz	376500 1882.5 MHz	382000 1910 MHz	MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1	24.0	24.3	24.1	0	24.8	20.3	20.3	20.3	0	20.8
				1	25	24.1	24.3	24.1	0	24.8	20.3	20.3	20.3	0	20.8
				1	50	24.1	24.3	24.1	0	24.8	20.3	20.3	20.3	0	20.8
				25	12	24.0	24.3	24.1	0	24.8	20.3	20.3	20.3	0	20.8
			QPSK	1	1	24.1	24.2	24.1	0	24.8	20.3	20.3	20.3	0	20.8
				1	25	24.1	24.2	24.1	0	24.8	20.3	20.4	20.3	0	20.8
				1	50	24.1	24.2	24.1	0	24.8	20.3	20.4	20.3	0	20.8
				25	12	24.1	24.0	24.1	0	24.8	20.3	20.2	20.3	0	20.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						370500 1852.5 MHz	376500 1882.5 MHz	382500 1912.5 MHz	MPR	Tune-up Limit	370500 1852.5 MHz	376500 1882.5 MHz	382500 1912.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	24.0	24.0	24.3	0	24.8	20.2	20.2	20.2	0	20.8
				1	12	24.1	24.0	24.3	0	24.8	20.1	20.2	20.2	0	20.8
				1	23	24.2	24.2	24.3	0	24.8	20.2	20.3	20.2	0	20.8
				12	6	24.1	24.0	24.3	0	24.8	20.1	20.2	20.2	0	20.8
			QPSK	1	1	24.2	24.0	24.3	0	24.8	20.2	20.2	20.2	0	20.8
				1	12	24.1	24.0	24.3	0	24.8	20.1	20.2	20.3	0	20.8
				1	23	24.2	24.2	24.3	0	24.8	20.2	20.3	20.2	0	20.8
				12	6	24.1	24.0	24.3	0	24.8	20.1	20.2	20.4	0	20.8

NR Band 25 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500		MPR	Tune-up Limit		376500		MPR	Tune-up Limit		
							1882.5 MHz			1882.5 MHz		1882.5 MHz					
40	DFT-s	15	$\pi/2$ BPSK	1	1		18.8		0	19.2		19.6		0	19.8		
				1	107		19.0		0	19.2		19.6		0	19.8		
				1	214		18.9		0	19.2		19.5		0	19.8		
				108	54		19.0		0	19.2		19.6		0	19.8		
		QPSK	1	1		18.8		0	19.2		19.6		0	19.8			
			1	107		18.8		0	19.2		19.6		0	19.8			
			1	214		18.8		0	19.2		19.5		0	19.8			
			108	54		18.7		0	19.2		19.5		0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500		MPR	Tune-up Limit		376500		MPR	Tune-up Limit		
							1882.5 MHz			1882.5 MHz		1882.5 MHz					
30	DFT-s	15	$\pi/2$ BPSK	1	1		18.6		0	19.2		19.5		0	19.8		
				1	79		18.6		0	19.2		19.5		0	19.8		
				1	158		18.7		0	19.2		19.6		0	19.8		
				80	40		18.6		0	19.2		19.6		0	19.8		
		QPSK	1	1		18.6		0	19.2		19.5		0	19.8			
			1	79		18.7		0	19.2		19.5		0	19.8			
			1	158		18.7		0	19.2		19.6		0	19.8			
			80	40		18.6		0	19.2		19.5		0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500		MPR	Tune-up Limit		376500		MPR	Tune-up Limit		
							1882.5 MHz			1882.5 MHz		1882.5 MHz					
25	DFT-s	15	$\pi/2$ BPSK	1	1		18.7		0	19.2		19.6		0	19.8		
				1	66		18.6		0	19.2		19.5		0	19.8		
				1	131		18.7		0	19.2		19.5		0	19.8		
				64	32		18.6		0	19.2		19.5		0	19.8		
		QPSK	1	1		18.6		0	19.2		19.6		0	19.8			
			1	66		18.5		0	19.2		19.6		0	19.8			
			1	131		18.6		0	19.2		19.6		0	19.8			
			64	32		18.6		0	19.2		19.5		0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							376500		MPR	Tune-up Limit		376500		MPR	Tune-up Limit		
							1860 MHz			1882.5 MHz		1905 MHz			1860 MHz	1882.5 MHz	1905 MHz
20	DFT-s	15	$\pi/2$ BPSK	1	1	18.7	18.8	18.5	0	19.2	19.2	19.3	19.2	0	19.8		
				1	52	18.6	18.7	18.5	0	19.2	19.2	19.3	19.2	0	19.8		
				1	104	18.6	18.6	18.5	0	19.2	19.2	19.2	19.2	0	19.8		
				50	25	18.6	18.6	18.5	0	19.2	19.3	19.3	19.2	0	19.8		
		QPSK	1	1	18.6	18.7	18.6	0	19.2	19.2	19.2	19.2	0	19.8			
			1	52	18.7	18.6	18.5	0	19.2	19.2	19.2	19.3	0	19.8			
			1	104	18.7	18.7	18.8	0	19.2	19.2	19.2	19.2	0	19.8			
			50	25	18.7	18.6	18.5	0	19.2	19.3	19.3	19.2	0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							371500	376500	381500	MPR	Tune-up Limit		371500	376500	381500	MPR	Tune-up Limit
							1857.5 MHz	1882.5 MHz	1907.5 MHz		1857.5 MHz		1882.5 MHz	1907.5 MHz			
15	DFT-s	15	$\pi/2$ BPSK	1	1	18.8	18.7	18.5	0	19.2	19.2	19.2	19.3	0	19.8		
				1	39	18.7	18.6	18.6	0	19.2	19.2	19.3	19.2	0	19.8		
				1	77	18.7	18.6	18.5	0	19.2	19.2	19.2	19.2	0	19.8		
				36	18	18.6	18.5	18.4	0	19.2	19.2	19.2	19.3	0	19.8		
		QPSK	1	1	18.7	18.8	18.6	0	19.2	19.2	19.3	19.2	0	19.8			
			1	39	18.7	18.7	18.6	0	19.2	19.2	19.2	19.3	0	19.8			
			1	77	18.7	18.6	18.6	0	19.2	19.2	19.2	19.2	0	19.8			
			36	18	18.6	18.6	18.5	0	19.2	19.2	19.3	19.3	0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							371000	376500	382000	MPR	Tune-up Limit		371000	376500	382000	MPR	Tune-up Limit
							1855 MHz	1882.5 MHz	1910 MHz		1855 MHz		1882.5 MHz	1910 MHz			
10	DFT-s	15	$\pi/2$ BPSK	1	1	18.4	18.4	18.4	0	19.2	19.3	19.4	19.4	0	19.8		
				1	25	18.4	18.4	18.4	0	19.2	19.4	19.4	19.4	0	19.8		
				1	50	18.4	18.4	18.4	0	19.2	19.3	19.3	19.3	0	19.8		
				25	12	18.4	18.4	18.4	0	19.2	19.3	19.3	19.4	0	19.8		
		QPSK	1	1	18.4	18.4	18.4	0	19.2	19.3	19.4	19.4	0	19.8			
			1	25	18.4	18.5	18.5	0	19.2	19.4	19.4	19.4	0	19.8			
			1	50	18.4	18.4	18.4	0	19.2	19.3	19.3	19.3	0	19.8			
			25	12	18.4	18.4	18.4	0	19.2	19.4	19.3	19.4	0	19.8			
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)						
							370500	376500	382500	MPR	Tune-up Limit		370500	376500	382500	MPR	Tune-up Limit
							1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz		1882.5 MHz	1912.5 MHz			
5	DFT-s	15	$\pi/2$ BPSK	1	1	18.5	18.5	18.3	0	19.2	19.4	19.4	19.4	0	19.8		
				1	12	18.4	18.4	18.3	0	19.2	19.4	19.4	19.3	0	19.8		
				1	23	18.5	18.4	18.3	0	19.2	19.5	19.4	19.4	0	19.8		
				12	6	18.5	18.4	18.3	0	19.2	19.4	19.4	19.3	0	19.8		
		QPSK	1	1	18.4	18.5	18.3	0	19.2	19.5	19.5	19.3	0	19.8			
			1	12	18.4	18.5	18.3	0	19.2	19.4	19.4	19.3	0	19.8			
			1	23	18.4	18.5	18.3	0	19.2	19.5	19.4	19.3	0	19.8			
			12	6	18.4	18.4	18.4	0	19.2	19.4	19.4	19.4	0	19.8			

NR Band 26 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						163800	166300	168800	MPR	Tune-up Limit	163800	166300	168800	MPR	Tune-up Limit
						819 MHz	831.5 MHz	844 MHz			819 MHz	831.5 MHz	844 MHz		
10	DFT-s	15	$\pi/2$ BPSK	1	1	24.9	25.0	24.8	0	25.7	23.9	24.0	23.8	0	24.5
				1	25	24.9	25.0	24.8	0	25.7	23.8	24.0	23.8	0	24.5
				1	50	24.8	25.0	24.8	0	25.7	23.8	23.9	23.7	0	24.5
				25	12	24.8	24.9	24.8	0	25.7	23.8	23.8	23.7	0	24.5
			QPSK	1	1	25.0	25.1	24.8	0	25.7	23.9	24.0	23.9	0	24.5
				1	25	24.9	25.0	24.8	0	25.7	23.8	23.9	23.8	0	24.5
				1	50	24.8	25.1	24.8	0	25.7	23.8	23.9	23.8	0	24.5
				25	12	24.9	25.0	24.8	0	25.7	23.8	23.9	23.8	0	24.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						163300	166300	169300	MPR	Tune-up Limit	163300	166300	169300	MPR	Tune-up Limit
						816.5 MHz	831.5 MHz	846.5 MHz			816.5 MHz	831.5 MHz	846.5 MHz		
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.8	25.0	24.8	0	25.7	24.0	23.9	23.8	0	24.5
				1	12	24.8	25.0	24.8	0	25.7	24.0	23.9	23.8	0	24.5
				1	23	24.9	25.0	24.8	0	25.7	24.0	23.8	23.8	0	24.5
				12	6	24.9	25.0	24.8	0	25.7	24.0	23.8	23.8	0	24.5
			QPSK	1	1	24.9	25.1	24.8	0	25.7	23.8	23.9	23.8	0	24.5
				1	12	24.9	25.1	24.8	0	25.7	23.8	23.9	23.8	0	24.5
				1	23	24.9	25.1	24.8	0	25.7	23.7	23.9	23.8	0	24.5
				12	6	25.0	25.1	24.8	0	25.7	23.7	23.9	23.8	0	24.5

NR Band 26 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						163800	166300	168800	MPR	Tune-up Limit	163800	166300	168800	MPR	Tune-up Limit
						819 MHz	831.5 MHz	844 MHz			819 MHz	831.5 MHz	844 MHz		
10	DFT-s	15	$\pi/2$ BPSK	1	1	23.4	23.5	23.5	0	24.1	24.0	23.9	24.0	0	24.7
				1	25	23.5	23.5	23.4	0	24.1	23.9	24.0	24.0	0	24.7
				1	50	23.4	23.4	23.5	0	24.1	24.0	24.0	23.9	0	24.7
				25	12	23.4	23.5	23.5	0	24.1	24.0	23.9	23.9	0	24.7
			QPSK	1	1	23.4	23.5	23.5	0	24.1	23.9	24.0	24.0	0	24.7
				1	25	23.5	23.5	23.4	0	24.1	23.9	24.0	24.1	0	24.7
				1	50	23.5	23.4	23.5	0	24.1	24.0	23.9	24.0	0	24.7
				25	12	23.4	23.5	23.5	0	24.1	24.0	24.0	24.0	0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						163300	166300	169300	MPR	Tune-up Limit	163300	166300	169300	MPR	Tune-up Limit
						816.5 MHz	831.5 MHz	846.5 MHz			816.5 MHz	831.5 MHz	846.5 MHz		
5	DFT-s	15	$\pi/2$ BPSK	1	1	23.5	23.6	23.5	0	24.1	24.0	24.1	24.1	0	24.7
				1	12	23.5	23.6	23.6	0	24.1	24.0	24.1	24.2	0	24.7
				1	23	23.6	23.5	23.5	0	24.1	23.9	24.0	24.1	0	24.7
				12	6	23.5	23.6	23.6	0	24.1	23.9	24.1	24.1	0	24.7
			QPSK	1	1	23.6	23.5	23.6	0	24.1	24.0	24.1	24.1	0	24.7
				1	12	23.6	23.6	23.6	0	24.1	24.0	24.1	24.1	0	24.7
				1	23	23.5	23.6	23.5	0	24.1	24.0	24.1	24.0	0	24.7
				12	6	23.5	23.6	23.6	0	24.1	23.9	24.1	24.1	0	24.7

NR Band 30 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	25.0		0	25.6	19.9		0	20.2
				1	25	25.1		0	25.6	19.9		0	20.2
				1	50	25.0		0	25.6	19.8		0	20.2
				25	12	24.9		0	25.6	19.9		0	20.2
			QPSK	1	1	25.0		0	25.6	19.9		0	20.2
				1	25	25.0		0	25.6	19.9		0	20.2
				1	50	25.0		0	25.6	19.8		0	20.2
				25	12	25.0		0	25.6	19.9		0	20.2
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.8		0	25.6	19.7		0	20.2
				1	12	24.9		0	25.6	19.7		0	20.2
				1	23	24.8		0	25.6	19.7		0	20.2
				12	6	24.9		0	25.6	19.7		0	20.2
			QPSK	1	1	24.9		0	25.6	19.7		0	20.2
				1	12	24.9		0	25.6	19.7		0	20.2
				1	23	24.9		0	25.6	19.7		0	20.2
				12	6	24.9		0	25.6	19.7		0	20.2

NR Band 30 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	19.8		0	20.5	20.6		0	21
				1	25	20.0		0	20.5	20.8		0	21
				1	50	19.7		0	20.5	20.7		0	21
				25	12	20.0		0	20.5	20.8		0	21
			QPSK	1	1	19.8		0	20.5	20.6		0	21
				1	25	19.9		0	20.5	20.6		0	21
				1	50	19.7		0	20.5	20.7		0	21
				25	12	19.7		0	20.5	20.6		0	21
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	19.8		0	20.5	20.4		0	21
				1	12	19.8		0	20.5	20.4		0	21
				1	23	19.8		0	20.5	20.4		0	21
				12	6	19.8		0	20.5	20.5		0	21
			QPSK	1	1	19.8		0	20.5	20.4		0	21
				1	12	19.8		0	20.5	20.5		0	21
				1	23	19.8		0	20.5	20.4		0	21
				12	6	19.8		0	20.5	20.4		0	21

NR Band 30 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	23.0		0	23.6	18.8		0	19.3
				1	25	23.0		0	23.6	18.9		0	19.3
				1	50	22.9		0	23.6	18.7		0	19.3
				25	12	23.0		0	23.6	18.9		0	19.3
			QPSK	1	1	22.9		0	23.6	18.8		0	19.3
				1	25	22.9		0	23.6	18.7		0	19.3
				1	50	22.9		0	23.6	18.7		0	19.3
				25	12	23.0		0	23.6	18.7		0	19.3
5	DFT-s	15	$\pi/2$ BPSK	1	1	22.8		0	23.6	18.9		0	19.3
				1	12	22.9		0	23.6	18.9		0	19.3
				1	23	22.8		0	23.6	18.7		0	19.3
				12	6	22.9		0	23.6	18.7		0	19.3
			QPSK	1	1	22.9		0	23.6	18.7		0	19.3
				1	12	22.9		0	23.6	18.7		0	19.3
				1	23	22.8		0	23.6	18.7		0	19.3
				12	6	22.9		0	23.6	18.7		0	19.3

NR Band 30 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						462000	2310 MHz	MPR	Tune-up Limit	462000	2310 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	19.5		0	19.7	19.7		0	20.1
				1	25	19.6		0	19.7	19.7		0	20.1
				1	50	19.5		0	19.7	19.7		0	20.1
				25	12	19.6		0	19.7	19.7		0	20.1
			QPSK	1	1	19.5		0	19.7	19.7		0	20.1
				1	25	19.5		0	19.7	19.7		0	20.1
				1	50	19.6		0	19.7	19.7		0	20.1
				25	12	19.4		0	19.7	19.6		0	20.1
5	DFT-s	15	$\pi/2$ BPSK	1	1	19.4		0	19.7	19.5		0	20.1
				1	12	19.6		0	19.7	19.5		0	20.1
				1	23	19.5		0	19.7	19.5		0	20.1
				12	6	19.5		0	19.7	19.5		0	20.1
			QPSK	1	1	19.4		0	19.7	19.6		0	20.1
				1	12	19.5		0	19.7	19.6		0	20.1
				1	23	19.5		0	19.7	19.6		0	20.1
				12	6	19.5		0	19.7	19.6		0	20.1

NR Band 41 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						518598	2592.99 MHz	MFR	Tune-up Limit	518598	2592.99 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.7	19.7		0	20.4
				1	136	25.0		0	25.7	19.9		0	20.4
				1	271	24.9		0	25.7	19.7		0	20.4
				135	67	24.7		0	25.7	19.9		0	20.4
				1	1	24.9		0	25.7	19.7		0	20.4
			QPSK	1	136	24.8		0	25.7	19.7		0	20.4
				1	271	24.9		0	25.7	19.8		0	20.4
				135	67	24.7		0	25.7	19.7		0	20.4
				1	1	24.9		0	25.7	19.7		0	20.4
				1	136	24.8		0	25.7	19.7		0	20.4
90	DFT-s	30	$\pi/2$ BPSK	1	1	24.6		0	25.7	19.7		0	20.4
				1	122	24.6		0	25.7	19.9		0	20.4
				1	243	24.9		0	25.7	19.8		0	20.4
				121	60	24.6		0	25.7	19.8		0	20.4
				1	1	24.6		0	25.7	19.8		0	20.4
			QPSK	1	122	24.6		0	25.7	19.9		0	20.4
				1	243	24.6		0	25.7	19.8		0	20.4
				121	60	24.6		0	25.7	19.8		0	20.4
				1	1	24.6		0	25.7	19.8		0	20.4
				1	122	24.8		0	25.7	19.9		0	20.4
80	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.7	19.7		0	20.4
				1	108	24.6		0	25.7	20.0		0	20.4
				1	215	24.9		0	25.7	19.8		0	20.4
				108	54	24.9		0	25.7	19.8		0	20.4
				1	1	24.8		0	25.7	19.8		0	20.4
			QPSK	1	108	24.8		0	25.7	19.9		0	20.4
				1	215	24.7		0	25.7	19.8		0	20.4
				108	54	24.7		0	25.7	19.8		0	20.4
				1	1	24.7		0	25.7	19.8		0	20.4
				1	108	24.8		0	25.7	19.9		0	20.4
70	DFT-s	30	$\pi/2$ BPSK	1	1	24.8		0	25.7	19.7		0	20.4
				1	91	24.7		0	25.7	19.5		0	20.4
				1	187	24.7		0	25.7	19.5		0	20.4
				94	47	24.9		0	25.7	19.6		0	20.4
				1	1	24.8		0	25.7	19.7		0	20.4
			QPSK	1	91	24.8		0	25.7	19.5		0	20.4
				1	187	24.9		0	25.7	19.5		0	20.4
				94	47	24.8		0	25.7	19.6		0	20.4
				1	1	24.7		0	25.7	19.7		0	20.4
				1	91	24.7		0	25.7	19.9		0	20.4
60	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.7	19.9		0	20.4
				1	80	24.7		0	25.7	19.8		0	20.4
				1	160	24.7		0	25.7	19.8		0	20.4
				81	40	24.7		0	25.7	19.8		0	20.4
				1	1	24.7		0	25.7	19.9		0	20.4
			QPSK	1	80	24.7		0	25.7	19.9		0	20.4
				1	160	24.7		0	25.7	19.8		0	20.4
				81	40	24.7		0	25.7	19.8		0	20.4
				1	1	24.7		0	25.7	19.9		0	20.4
				1	80	24.8		0	25.7	19.9		0	20.4
50	DFT-s	30	$\pi/2$ BPSK	1	1	24.9		0	25.7	19.9		0	20.4
				1	66	24.8		0	25.7	19.9		0	20.4
				1	131	24.7		0	25.7	19.9		0	20.4
				64	32	24.7		0	25.7	19.9		0	20.4
				1	1	24.9		0	25.7	19.8		0	20.4
			QPSK	1	66	24.8		0	25.7	19.9		0	20.4
				1	131	24.7		0	25.7	19.9		0	20.4
				64	32	24.7		0	25.7	19.9		0	20.4
				1	1	24.9		0	25.7	19.8		0	20.4
				1	66	24.8		0	25.7	19.9		0	20.4
40	DFT-s	30	$\pi/2$ BPSK	1	1	24.9	2503.96 MHz	0	25.7	19.7	2503.96 MHz	0	20.4
				1	52	24.9	2503.96 MHz	0	25.7	19.6	2503.96 MHz	0	20.4
				1	104	25.0	2503.96 MHz	0	25.7	19.8	2503.96 MHz	0	20.4
				50	25	24.9	2503.96 MHz	0	25.7	19.6	2503.96 MHz	0	20.4
				1	1	24.9	2503.96 MHz	0	25.7	19.7	2503.96 MHz	0	20.4
			QPSK	1	52	24.9	2503.96 MHz	0	25.7	19.6	2503.96 MHz	0	20.4
				1	104	25.0	2503.96 MHz	0	25.7	19.8	2503.96 MHz	0	20.4
				50	25	24.9	2503.96 MHz	0	25.7	19.6	2503.96 MHz	0	20.4
				1	1	24.9	2503.96 MHz	0	25.7	19.7	2503.96 MHz	0	20.4
				1	52	24.9	2503.96 MHz	0	25.7	19.6	2503.96 MHz	0	20.4
30	DFT-s	30	$\pi/2$ BPSK	1	1	24.8	503196 MHz	0	25.7	19.6	503196 MHz	0	20.4
				1	38	24.9	503196 MHz	0	25.7	19.6	503196 MHz	0	20.4
				1	76	24.9	503196 MHz	0	25.7	19.7	503196 MHz	0	20.4
				36	18	24.8	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
				1	1	24.8	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
			QPSK	1	38	24.8	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
				1	76	24.8	503196 MHz	0	25.7	19.7	503196 MHz	0	20.4
				36	18	24.8	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
				1	1	24.8	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
				1	38	24.7	503196 MHz	0	25.7	19.5	503196 MHz	0	20.4
20	DFT-s	30	$\pi/2$ BPSK	1	1	24.8	501198 MHz	0	25.7	19.4	501198 MHz	0	20.4
				1	25	24.8	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				1	49	24.9	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				25	12	24.9	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				1	1	24.9	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
			QPSK	1	25	24.8	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				1	49	24.8	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				25	12	24.9	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				1	1	24.8	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4
				1	25	24.8	501198 MHz	0	25.7	19.5	501198 MHz	0	20.4

NR Band 41 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						518598	518598	MFR	Tune-up Limit	518598	518598	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	136	18.1	18.1	0	18.3	18.4	18.4	0	18.8
				1	271	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				135	67	18.1	18.1	0	18.3	18.4	18.4	0	18.8
				1	1	17.8	17.8	0	18.3	18.1	18.1	0	18.8
			QPSK	1	136	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				1	271	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				135	67	17.5	17.5	0	18.3	18.1	18.1	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	136	17.8	17.8	0	18.3	18.1	18.1	0	18.8
90	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	122	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				1	243	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				121	60	17.9	17.9	0	18.3	18.1	18.1	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
			QPSK	1	122	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	243	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				121	60	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	122	17.7	17.7	0	18.3	18.1	18.1	0	18.8
80	DFT-s	30	$\pi/2$ BPSK	1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	108	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	215	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				108	54	18.0	18.0	0	18.3	18.2	18.2	0	18.8
				1	1	17.9	17.9	0	18.3	18.3	18.3	0	18.8
			QPSK	1	108	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	215	17.9	17.9	0	18.3	18.1	18.1	0	18.8
				108	54	18.0	18.0	0	18.3	18.2	18.2	0	18.8
				1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	108	17.9	17.9	0	18.3	18.1	18.1	0	18.8
70	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				1	91	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	187	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				94	47	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				1	1	17.7	17.7	0	18.3	18.1	18.1	0	18.8
			QPSK	1	91	17.9	17.9	0	18.3	18.3	18.3	0	18.8
				1	187	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				94	47	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	91	17.8	17.8	0	18.3	18.1	18.1	0	18.8
60	DFT-s	30	$\pi/2$ BPSK	1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	80	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	160	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				81	40	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
			QPSK	1	80	17.7	17.7	0	18.3	18.3	18.3	0	18.8
				1	160	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				81	40	17.9	17.9	0	18.3	18.1	18.1	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	80	17.7	17.7	0	18.3	18.1	18.1	0	18.8
50	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	66	18.0	18.0	0	18.3	18.1	18.1	0	18.8
				1	131	17.8	17.8	0	18.3	18.3	18.3	0	18.8
				64	32	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
			QPSK	1	66	18.0	18.0	0	18.3	18.2	18.2	0	18.8
				1	131	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				64	32	17.8	17.8	0	18.3	18.3	18.3	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	66	17.8	17.8	0	18.3	18.1	18.1	0	18.8
40	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	52	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	104	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				50	25	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				1	1	17.9	17.9	0	18.3	18.3	18.3	0	18.8
			QPSK	1	52	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	104	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				50	25	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	1	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	52	17.7	17.7	0	18.3	18.3	18.3	0	18.8
30	DFT-s	30	$\pi/2$ BPSK	1	1	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	38	17.8	17.8	0	18.3	18.3	18.3	0	18.8
				1	76	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				36	18	17.7	17.7	0	18.3	18.3	18.3	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
			QPSK	1	38	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	76	17.7	17.7	0	18.3	18.3	18.3	0	18.8
				36	18	17.9	17.9	0	18.3	18.2	18.2	0	18.8
				1	1	17.8	17.8	0	18.3	18.1	18.1	0	18.8
				1	38	17.7	17.7	0	18.3	18.2	18.2	0	18.8
20	DFT-s	30	$\pi/2$ BPSK	1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	25	17.9	17.9	0	18.3	18.3	18.3	0	18.8
				1	49	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				25	12	17.9	17.9	0	18.3	18.3	18.3	0	18.8
				1	1	17.8	17.8	0	18.3	18.1	18.1	0	18.8
			QPSK	1	25	17.7	17.7	0	18.3	18.2	18.2	0	18.8
				1	49	17.7	17.7	0	18.3	18.1	18.1	0	18.8
				25	12	17.8	17.8	0	18.3	18.3	18.3	0	18.8
				1	1	17.8	17.8	0	18.3	18.2	18.2	0	18.8
				1	25	17.7	17.7	0	18.3	18.1	18.1	0	18.8

NR Band 41 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
						518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit			
100	DFT-s	30	π/2 BPSK	1	1	23.7		0	24	16.8		0	17.1			
				1	136	23.9		0	24	16.9		0	17.1			
				1	271	23.6		0	24	16.7		0	17.1			
				135	67	23.7		0	24	16.9		0	17.1			
				1	1	23.7		0	24	16.8		0	17.1			
			QPSK	1	136	23.6		0	24	16.7		0	17.1			
				1	271	23.6		0	24	16.7		0	17.1			
				135	67		0	24	16.6		0	17.1				
							0	24								
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit									
90	DFT-s	30	π/2 BPSK	1	1	23.5		0	24	16.6		0	17.1			
				1	122	23.4		0	24	16.6		0	17.1			
				1	243	23.4		0	24	16.6		0	17.1			
				121	60	23.4		0	24	16.4		0	17.1			
				1	1	23.4		0	24	16.5		0	17.1			
			QPSK	1	122	23.5		0	24	16.5		0	17.1			
				1	243	23.5		0	24	16.5		0	17.1			
				121	60	23.5		0	24	16.4		0	17.1			
							0	24								
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit									
80	DFT-s	30	π/2 BPSK	1	1	23.4		0	24	16.4		0	17.1			
				1	108	23.5		0	24	16.4		0	17.1			
				1	215	23.6		0	24	16.3		0	17.1			
				108	54	23.4		0	24	16.3		0	17.1			
				1	1	23.5		0	24	16.3		0	17.1			
			QPSK	1	108	23.6		0	24	16.3		0	17.1			
				1	215	23.5		0	24	16.4		0	17.1			
				108	54	23.5		0	24	16.4		0	17.1			
							0	24								
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit									
70	DFT-s	30	π/2 BPSK	1	1	23.4		0	24	16.5		0	17.1			
				1	91	23.5		0	24	16.6		0	17.1			
				1	187	23.6		0	24	16.6		0	17.1			
				94	47	23.5		0	24	16.4		0	17.1			
				1	1	23.6		0	24	16.4		0	17.1			
			QPSK	1	91	23.4		0	24	16.6		0	17.1			
				1	187	23.5		0	24	16.5		0	17.1			
				94	47	23.6		0	24	16.5		0	17.1			
							0	24								
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit									
60	DFT-s	30	π/2 BPSK	1	1	23.5		0	24	16.5		0	17.1			
				1	80	23.4		0	24	16.5		0	17.1			
				1	160	23.4		0	24	16.6		0	17.1			
				81	40	23.4		0	24	16.4		0	17.1			
				1	1	23.6		0	24	16.6		0	17.1			
			QPSK	1	80	23.5		0	24	16.6		0	17.1			
				1	160	23.5		0	24	16.6		0	17.1			
				81	40	23.6		0	24	16.4		0	17.1			
							0	24								
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
518598 2592.99 MHz		MFR	Tune-up Limit	518598 2592.99 MHz		MFR	Tune-up Limit									
50	DFT-s	30	π/2 BPSK	1	1	23.4		0	24	16.6		0	17.1			
				1	66	23.4		0	24	16.5		0	17.1			
				1	131	23.5		0	24	16.5		0	17.1			
				64	32	23.5		0	24	16.6		0	17.1			
				1	1	23.4		0	24	16.6		0	17.1			
			QPSK	1	66	23.4		0	24	16.4		0	17.1			
				1	131	23.4		0	24	16.4		0	17.1			
				64	32	23.4		0	24	16.4		0	17.1			
							0	24								
BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
503196 2515.98 MHz	510900 2554.5 MHz	518598 2592.99 MHz	526296 2631.48 MHz	533994 2669.97 MHz	MFR	Tune-up Limit	503196 2515.98 MHz	510900 2554.5 MHz	518598 2592.99 MHz	526296 2631.48 MHz	533994 2669.97 MHz	MFR	Tune-up Limit			
40	DFT-s	30	π/2 BPSK	1	1	23.6	23.6	23.6	23.4	0	24	16.6	16.6	16.5	0	17.1
				1	52	23.6	23.5	23.6	23.5	0	24	16.5	16.5	16.4	0	17.1
				1	104	23.4	23.4	23.6	23.5	0	24	16.5	16.5	16.4	0	17.1
				50	25	23.4	23.4	23.5	23.6	0	24	16.4	16.5	16.5	0	17.1
				1	1	23.4	23.5	23.5	23.4	0	24	16.4	16.6	16.4	0	17.1
			QPSK	1	52	23.6	23.4	23.5	23.5	0	24	16.5	16.5	16.6	0	17.1
				1	104	23.4	23.5	23.4	23.6	0	24	16.5	16.5	16.6	0	17.1
				50	25	23.5	23.5	23.6	23.5	0	24	16.4	16.6	16.6	0	17.1
										0	24	16.4	16.6	16.4	0	17.1
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
502200 2511 MHz	510396 2551.98 MHz	518598 2592.99 MHz	526800 2634 MHz	534996 2674.98 MHz	MFR	Tune-up Limit	502200 2511 MHz	510396 2551.98 MHz	518598 2592.99 MHz	526800 2634 MHz	534996 2674.98 MHz	MFR	Tune-up Limit			
30	DFT-s	30	π/2 BPSK	1	1	23.6	23.4	23.6	23.4	0	24	16.6	16.5	16.4	0	17.1
				1	38	23.6	23.4	23.5	23.4	0	24	16.4	16.4	16.5	0	17.1
				1	76	23.5	23.4	23.5	23.5	0	24	16.5	16.4	16.4	0	17.1
				36	18	23.5	23.5	23.5	23.5	0	24	16.5	16.5	16.6	0	17.1
				1	1	23.4	23.4	23.4	23.4	0	24	16.5	16.5	16.5	0	17.1
			QPSK	1	38	23.5	23.6	23.4	23.5	0	24	16.4	16.5	16.4	0	17.1
				1	76	23.4	23.4	23.5	23.5	0	24	16.5	16.4	16.5	0	17.1
				36	18	23.5	23.6	23.4	23.5	0	24	16.5	16.5	16.6	0	17.1
										0	24	16.5	16.5	16.6	0	17.1
BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)						
501198 2505.99 MHz	509898 2549.49 MHz	518598 2592.99 MHz	527298 2636.49 MHz	535998 2679.99 MHz	MFR	Tune-up Limit	501198 2505.99 MHz	509898 2549.49 MHz	518598 2592.99 MHz	527298 2636.49 MHz	535998 2679.99 MHz	MFR	Tune-up Limit			
20	DFT-s	30	π/2 BPSK	1	1	23.5	23.5	23.4	23.5	0	24	16.4	16.5	16.5	0	17.1
				1	25	23.4	23.5	23.4	23.4	0	24	16.4	16.5	16.4	0	17.1
				1	49	23.5	23.6	23.5	23.5	0	24	16.4	16.5	16.5	0	17.1
				25	12	23.5	23.5	23.4	23.4	0	24	16.5	16.5	16.4	0	17.1
				1	1	23.4	23.4	23.5	23.6	0	24	16.4	16.4	16.5	0	17.1
			QPSK	1	25	23.4	23.5	23.6	23.6	0	24	16.5	16.4	16.6	0	17.1
				1	49	23.4	23.5	23.5	23.5	0	24	16.5	16.4	16.6	0	17.1
				25	12	23.4	23.6	23.6	23.4	0	24	16.4	16.5	16.5	0	17.1
										0	24					

NR Band 41 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						518598	2592.99 MHz	MFR	Tune-up Limit	518598	2592.99 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	18.0		0	19	19.9		0	20.5
				1	136	18.4		0	19	20.3		0	20.5
				1	271	18.3		0	19	20.3		0	20.5
				135	67	18.3		0	19	20.3		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
			QPSK	1	136	18.0		0	19	20.1		0	20.5
				1	271	18.2		0	19	20.2		0	20.5
				135	67	18.0		0	19	19.9		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
				1	122	18.0		0	19	20.0		0	20.5
90	DFT-s	30	$\pi/2$ BPSK	1	1	18.0		0	19	19.9		0	20.5
				1	122	18.0		0	19	20.0		0	20.5
				1	243	18.0		0	19	19.9		0	20.5
				121	60	18.1		0	19	19.9		0	20.5
				1	1	18.1		0	19	19.9		0	20.5
			QPSK	1	122	18.1		0	19	19.9		0	20.5
				1	243	18.1		0	19	19.9		0	20.5
				121	60	18.1		0	19	19.9		0	20.5
				1	1	18.1		0	19	19.9		0	20.5
				1	108	18.2		0	19	20.0		0	20.5
80	DFT-s	30	$\pi/2$ BPSK	1	1	18.1		0	19	19.9		0	20.5
				1	215	18.1		0	19	19.9		0	20.5
				108	54	18.1		0	19	19.9		0	20.5
				1	1	18.0		0	19	20.0		0	20.5
				1	108	18.0		0	19	20.0		0	20.5
			QPSK	1	215	18.1		0	19	20.0		0	20.5
				108	54	18.0		0	19	19.9		0	20.5
				1	1	18.1		0	19	19.9		0	20.5
				1	91	18.0		0	19	19.9		0	20.5
				1	187	18.1		0	19	20.0		0	20.5
70	DFT-s	30	$\pi/2$ BPSK	1	1	18.0		0	19	19.9		0	20.5
				1	91	18.0		0	19	19.9		0	20.5
				1	187	18.1		0	19	20.0		0	20.5
				94	47	18.1		0	19	20.0		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
			QPSK	1	91	18.1		0	19	19.9		0	20.5
				1	187	18.2		0	19	19.9		0	20.5
				94	47	18.0		0	19	20.0		0	20.5
				1	1	18.1		0	19	19.9		0	20.5
				1	80	18.0		0	19	19.9		0	20.5
60	DFT-s	30	$\pi/2$ BPSK	1	1	18.0		0	19	19.9		0	20.5
				1	80	18.0		0	19	19.9		0	20.5
				1	160	18.1		0	19	19.9		0	20.5
				81	40	18.0		0	19	20.0		0	20.5
				1	1	18.1		0	19	19.9		0	20.5
			QPSK	1	80	18.2		0	19	20.0		0	20.5
				1	160	18.1		0	19	19.9		0	20.5
				81	40	18.1		0	19	20.0		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
				1	66	18.1		0	19	19.9		0	20.5
50	DFT-s	30	$\pi/2$ BPSK	1	1	18.0		0	19	19.9		0	20.5
				1	131	18.1		0	19	19.9		0	20.5
				64	32	18.1		0	19	19.9		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
				1	66	18.1		0	19	19.9		0	20.5
			QPSK	1	131	18.1		0	19	20.0		0	20.5
				64	32	18.1		0	19	20.0		0	20.5
				1	1	18.0		0	19	19.9		0	20.5
				1	52	18.0		0	19	19.9		0	20.5
				1	104	18.0		0	19	20.0		0	20.5
40	DFT-s	30	$\pi/2$ BPSK	1	1	18.1	18.0	0	19	20.0	19.9	0	20.5
				1	52	18.2	18.1	0	19	20.0	19.9	0	20.5
				1	104	18.2	18.0	0	19	20.0	19.9	0	20.5
				50	25	18.1	18.1	0	19	20.0	20.0	0	20.5
				1	1	18.1	18.0	0	19	20.0	20.0	0	20.5
			QPSK	1	52	18.2	18.0	0	19	19.9	20.0	0	20.5
				1	104	18.0	18.2	0	19	20.0	19.9	0	20.5
				50	25	18.1	18.1	0	19	19.9	20.0	0	20.5
				1	1	18.0	18.1	0	19	19.9	20.0	0	20.5
				1	36	18.2	18.1	0	19	19.9	20.0	0	20.5
30	DFT-s	30	$\pi/2$ BPSK	1	1	18.2	18.1	0	19	19.9	20.0	0	20.5
				1	36	18.2	18.1	0	19	19.9	20.0	0	20.5
				1	76	18.1	18.0	0	19	19.9	20.0	0	20.5
				36	18	18.2	18.0	0	19	20.0	19.9	0	20.5
				1	1	18.1	18.0	0	19	19.9	20.0	0	20.5
			QPSK	1	36	18.1	18.1	0	19	20.0	20.0	0	20.5
				1	76	18.2	18.2	0	19	20.0	19.9	0	20.5
				36	18	18.2	18.1	0	19	19.9	20.0	0	20.5
				1	1	18.0	18.1	0	19	19.9	20.0	0	20.5
				1	1	18.1	18.0	0	19	19.9	20.0	0	20.5
20	DFT-s	30	$\pi/2$ BPSK	1	1	18.1	18.0	0	19	19.9	20.0	0	20.5
				1	25	18.0	18.1	0	19	19.9	20.0	0	20.5
				1	49	18.0	18.1	0	19	19.9	20.0	0	20.5
				25	12	18.2	18.1	0	19	19.9	20.0	0	20.5
				1	1	18.2	18.0	0	19	20.0	19.9	0	20.5
			QPSK	1	25	18.1	18.1	0	19	20.0	20.0	0	20.5
				1	49	18.0	18.0	0	19	19.9	19.9	0	20.5
				25	12	18.1	18.0	0	19	20.0	19.9	0	20.5
				1	1	18.0	18.1	0	19	19.9	20.0	0	20.5
				1	1	18.1	18.0	0	19	19.9	20.0	0	20.5

NR Band 53 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							497860 2489.3 MHz		MPR	Tune-up Limit		497860 2489.3 MHz		MPR	Tune-up Limit
10	DFT-s	30	π/2 BPSK	1	1				0	20.7				0	20.7
				1	11				0	20.7				0	20.7
				1	22				0	20.7				0	20.7
				12	6				0	20.7				0	20.7
			QPSK	1	1				0	20.7				0	20.7
				1	11				0	20.7				0	20.7
				1	22				0	20.7				0	20.7
				12	6				0	20.7				0	20.7

NR Band 53 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)							
						497860			MPR	Tune-up Limit	497860			MPR	Tune-up Limit		
						2489.3 MHz					2489.3 MHz						
10	DFT-s	30	π/2 BPSK	1	1	20.6		0	20.7	20.6		0	20.7				
				1	11	20.7		0	20.7	20.7		0	20.7				
				1	22	20.6		0	20.7	20.6		0	20.7				
				12	6	20.7		0	20.7	20.7		0	20.7				
			QPSK	1	1	20.6		0	20.7	20.6		0	20.7				
				1	11	20.6		0	20.7	20.6		0	20.7				
				1	22	20.6		0	20.7	20.6		0	20.7				
				12	6	20.5		0	20.7	20.5		0	20.7				

NR Band 66 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000		MPR	Tune-up Limit		349000		MPR	Tune-up Limit
							1745 MHz					1745 MHz			
40	DFT-s	15	$\pi/2$ BPSK	1	1		24.7		0	24.8		17.9		0	18.1
				1	107		24.7		0	24.8		18.0		0	18.1
				1	214		24.7		0	24.8		17.8		0	18.1
				108	54		24.7		0	24.8		18.0		0	18.1
			QPSK	1	1		24.7		0	24.8		17.6		0	18.1
				1	107		24.7		0	24.8		17.7		0	18.1
				1	214		24.7		0	24.8		17.6		0	18.1
				108	54		24.7		0	24.8		17.7		0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000		MPR	Tune-up Limit		349000		MPR	Tune-up Limit
							1745 MHz					1745 MHz			
30	DFT-s	15	$\pi/2$ BPSK	1	1		24.6		0	24.8		17.7		0	18.1
				1	79		24.5		0	24.8		17.8		0	18.1
				1	158		24.6		0	24.8		17.8		0	18.1
				80	40		24.5		0	24.8		17.7		0	18.1
			QPSK	1	1		24.5		0	24.8		17.7		0	18.1
				1	79		24.5		0	24.8		17.8		0	18.1
				1	158		24.6		0	24.8		17.8		0	18.1
				80	40		24.6		0	24.8		17.8		0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						344000	349000	354000	MPR	Tune-up Limit	344000	349000	354000	MPR	Tune-up Limit
						1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20	DFT-s	15	$\pi/2$ BPSK	1	1	24.7	24.6	24.6	0	24.8	17.8	17.9	17.8	0	18.1
				1	52	24.6	24.5	24.6	0	24.8	17.8	17.9	17.8	0	18.1
				1	104	24.7	24.7	24.6	0	24.8	17.8	17.9	17.8	0	18.1
				50	25	24.7	24.7	24.6	0	24.8	17.8	17.9	17.8	0	18.1
			QPSK	1	1	24.7	24.7	24.7	0	24.8	17.8	18.0	18.0	0	18.1
				1	52	24.7	24.6	24.6	0	24.8	17.8	17.9	17.9	0	18.1
				1	104	24.7	24.7	24.6	0	24.8	17.8	17.9	17.9	0	18.1
				50	25	24.7	24.7	24.6	0	24.8	17.8	17.9	17.9	0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343500	349000	354500	MPR	Tune-up Limit	343500	349000	354500	MPR	Tune-up Limit
						1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz		
15	DFT-s	15	$\pi/2$ BPSK	1	1	24.6	24.6	24.6	0	24.8	17.6	17.8	17.8	0	18.1
				1	39	24.6	24.6	24.5	0	24.8	17.6	17.8	17.8	0	18.1
				1	77	24.6	24.7	24.5	0	24.8	17.7	17.8	17.8	0	18.1
				36	18	24.5	24.6	24.5	0	24.8	17.6	17.7	17.8	0	18.1
			QPSK	1	1	24.5	24.7	24.6	0	24.8	17.7	17.9	17.9	0	18.1
				1	39	24.6	24.7	24.5	0	24.8	17.7	17.8	17.8	0	18.1
				1	77	24.6	24.7	24.6	0	24.8	17.7	17.9	17.8	0	18.1
				36	18	24.5	24.7	24.6	0	24.8	17.7	17.8	17.8	0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343000	349000	355000	MPR	Tune-up Limit	343000	349000	355000	MPR	Tune-up Limit
						1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10	DFT-s	15	$\pi/2$ BPSK	1	1	24.6	24.5	24.6	0	24.8	17.9	17.6	17.8	0	18.1
				1	25	24.7	24.6	24.6	0	24.8	17.9	17.6	17.8	0	18.1
				1	50	24.6	24.6	24.6	0	24.8	17.8	17.6	17.7	0	18.1
				25	12	24.6	24.6	24.6	0	24.8	17.8	17.6	17.7	0	18.1
			QPSK	1	1	24.6	24.5	24.7	0	24.8	17.8	17.7	17.8	0	18.1
				1	25	24.7	24.6	24.7	0	24.8	17.9	17.7	17.8	0	18.1
				1	50	24.6	24.6	24.6	0	24.8	17.9	17.6	17.7	0	18.1
				25	12	24.6	24.6	24.6	0	24.8	17.9	17.6	17.8	0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						342500	349000	355500	MPR	Tune-up Limit	342500	349000	355500	MPR	Tune-up Limit
						1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz		
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				1	12	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				1	23	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				12	6	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
			QPSK	1	1	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				1	12	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				1	23	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1
				12	6	24.5	24.6	24.7	0	24.8	17.7	17.7	17.7	0	18.1

NR Band 66 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745 MHz		MPR	Tune-up Limit		349000 1745 MHz		MPR	Tune-up Limit
40	DFT-s	15	$\pi/2$ BPSK	1	1		20.5		0	21		20.8		0	21.3
				1	107		20.5		0	21		21.0		0	21.3
				1	214		20.4		0	21		20.9		0	21.3
				108	54		20.5		0	21		21.0		0	21.3
		QPSK	1	1		20.5		0	21		20.8		0	21.3	
			1	107		20.5		0	21		20.9		0	21.3	
			1	214		20.5		0	21		20.8		0	21.3	
			108	54		20.5		0	21		20.8		0	21.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745		MPR	Tune-up Limit		349000 1745.0		MPR	Tune-up Limit
30	DFT-s	15	$\pi/2$ BPSK	1	1		20.4		0	21		20.8		0	21.3
				1	79		20.4		0	21		20.8		0	21.3
				1	158		20.3		0	21		20.8		0	21.3
				80	40		20.3		0	21		20.8		0	21.3
		QPSK	1	1		20.4		0	21		20.8		0	21.3	
			1	79		20.4		0	21		20.8		0	21.3	
			1	158		20.3		0	21		20.8		0	21.3	
			80	40		20.3		0	21		20.8		0	21.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit	344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit
20	DFT-s	15	$\pi/2$ BPSK	1	1	20.4	20.4	20.3	0	21	20.9	20.7	20.7	0	21.3
				1	52	20.4	20.4	20.3	0	21	20.9	20.7	20.8	0	21.3
				1	104	20.4	20.3	20.4	0	21	20.9	20.7	20.8	0	21.3
				50	25	20.3	20.3	20.4	0	21	20.8	20.8	20.8	0	21.3
		QPSK	1	1	20.3	20.3	20.3	0	21	20.9	20.7	20.8	0	21.3	
			1	52	20.3	20.4	20.3	0	21	20.9	20.7	20.8	0	21.3	
			1	104	20.3	20.3	20.2	0	21	20.8	20.7	20.8	0	21.3	
			50	25	20.2	20.3	20.2	0	21	20.9	20.8	20.8	0	21.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit	343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	$\pi/2$ BPSK	1	1	20.3	20.3	20.3	0	21	20.8	20.8	20.7	0	21.3
				1	39	20.3	20.3	20.3	0	21	20.8	20.8	20.7	0	21.3
				1	77	20.3	20.3	20.4	0	21	20.8	20.8	20.7	0	21.3
				36	18	20.2	20.4	20.4	0	21	20.7	20.9	20.8	0	21.3
		QPSK	1	1	20.3	20.3	20.3	0	21	20.8	20.8	20.7	0	21.3	
			1	39	20.3	20.4	20.3	0	21	20.8	20.9	20.7	0	21.3	
			1	77	20.3	20.4	20.2	0	21	20.8	20.9	20.7	0	21.3	
			36	18	20.2	20.4	20.2	0	21	20.7	20.9	20.8	0	21.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit	343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	20.2	20.1	20.1	0	21	21.0	21.0	20.8	0	21.3
				1	25	20.2	20.2	20.1	0	21	21.0	21.0	20.9	0	21.3
				1	50	20.2	20.2	20.1	0	21	20.9	21.0	20.9	0	21.3
				25	12	20.1	20.1	20.2	0	21	20.9	21.0	20.8	0	21.3
		QPSK	1	1	20.2	20.1	20.1	0	21	21.0	21.0	20.8	0	21.3	
			1	25	20.1	20.2	20.1	0	21	21.0	20.9	20.8	0	21.3	
			1	50	20.1	20.2	20.2	0	21	20.9	21.0	20.8	0	21.3	
			25	12	20.1	20.1	20.1	0	21	20.9	21.0	20.9	0	21.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit	342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	20.3	20.3	20.3	0	21	20.8	21.0	20.8	0	21.3
				1	12	20.3	20.3	20.3	0	21	20.8	21.0	20.8	0	21.3
				1	23	20.4	20.3	20.3	0	21	20.8	21.0	20.8	0	21.3
				12	6	20.4	20.4	20.2	0	21	20.9	21.0	20.7	0	21.3
		QPSK	1	1	20.3	20.3	20.3	0	21	20.8	21.0	20.8	0	21.3	
			1	12	20.3	20.4	20.3	0	21	20.8	20.9	20.8	0	21.3	
			1	23	20.2	20.4	20.3	0	21	20.9	21.0	20.8	0	21.3	
			12	6	20.2	20.4	20.2	0	21	20.9	21.0	20.7	0	21.3	

NR Band 66 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745 MHz		MPR	Tune-up Limit		349000 1745 MHz		MPR	Tune-up Limit
40	DFT-s	15	π/2 BPSK	1	1		24.9		0	25.5		20.9		0	21.5
				1	107		25.1		0	25.5		21.0		0	21.5
				1	214		25.0		0	25.5		21.0		0	21.5
				108	54		25.0		0	25.5		21.1		0	21.5
			QPSK	1	1		24.7		0	25.5		20.6		0	21.5
				1	107		24.7		0	25.5		20.7		0	21.5
				1	214		24.8		0	25.5		20.9		0	21.5
				108	54		24.7		0	25.5		20.7		0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745 MHz		MPR	Tune-up Limit		349000 1745 MHz		MPR	Tune-up Limit
30	DFT-s	15	π/2 BPSK	1	1		24.6		0	25.5		20.8		0	21.5
				1	79		24.8		0	25.5		20.7		0	21.5
				1	158		24.6		0	25.5		20.6		0	21.5
				80	40		24.7		0	25.5		20.7		0	21.5
			QPSK	1	1		24.8		0	25.5		20.6		0	21.5
				1	79		24.8		0	25.5		20.7		0	21.5
				1	158		24.8		0	25.5		20.6		0	21.5
				80	40		24.8		0	25.5		20.7		0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit	344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit
20	DFT-s	15	π/2 BPSK	1	1	25.0	24.6	24.8	0	25.5	21.0	20.6	20.4	0	21.5
				1	52	24.9	24.6	24.8	0	25.5	20.8	20.6	20.4	0	21.5
				1	104	24.9	24.6	24.8	0	25.5	20.9	20.6	20.4	0	21.5
				50	25	25.0	24.7	24.8	0	25.5	21.0	20.6	20.6	0	21.5
			QPSK	1	1	24.8	24.6	24.9	0	25.5	20.9	20.7	20.5	0	21.5
				1	52	25.0	24.6	24.8	0	25.5	20.8	20.6	20.5	0	21.5
				1	104	24.9	24.6	25.0	0	25.5	21.0	20.6	20.6	0	21.5
				50	25	24.9	24.6	24.8	0	25.5	21.0	20.6	20.5	0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit	343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1	24.8	24.6	24.8	0	25.5	20.4	20.6	20.5	0	21.5
				1	39	24.8	24.6	25.0	0	25.5	20.5	20.6	20.4	0	21.5
				1	77	25.0	24.7	24.8	0	25.5	20.6	20.6	20.4	0	21.5
				36	18	24.9	24.6	24.8	0	25.5	20.6	21.0	20.5	0	21.5
			QPSK	1	1	24.8	24.7	24.9	0	25.5	20.4	20.6	20.5	0	21.5
				1	39	24.9	24.7	25.0	0	25.5	20.6	20.6	20.3	0	21.5
				1	77	24.9	24.7	25.0	0	25.5	20.3	20.6	20.5	0	21.5
				36	18	24.8	24.6	24.9	0	25.5	20.3	21.0	20.4	0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit	343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1	24.9	25.0	24.8	0	25.5	20.4	20.9	20.6	0	21.5
				1	25	25.0	25.0	24.9	0	25.5	20.6	20.7	20.6	0	21.5
				1	50	24.9	25.0	24.9	0	25.5	20.4	20.7	20.7	0	21.5
				25	12	24.8	24.9	24.8	0	25.5	20.6	20.9	20.8	0	21.5
			QPSK	1	1	24.9	24.7	24.8	0	25.5	20.5	20.6	20.9	0	21.5
				1	25	24.8	24.6	25.0	0	25.5	20.5	20.6	20.6	0	21.5
				1	50	25.0	25.0	24.9	0	25.5	20.4	20.7	20.8	0	21.5
				25	12	24.9	25.0	24.9	0	25.5	20.5	20.6	20.7	0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit	342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	24.9	24.5	25.0	0	25.5	20.8	20.9	20.6	0	21.5
				1	12	24.9	24.5	24.8	0	25.5	20.7	20.9	20.7	0	21.5
				1	23	24.8	25.0	24.8	0	25.5	20.7	21.0	20.6	0	21.5
				12	6	25.0	25.0	24.8	0	25.5	20.7	21.0	20.8	0	21.5
			QPSK	1	1	24.8	25.0	24.9	0	25.5	20.8	21.0	20.6	0	21.5
				1	12	24.9	25.0	24.8	0	25.5	20.7	21.0	20.6	0	21.5
				1	23	24.8	25.0	25.0	0	25.5	20.9	21.0	20.8	0	21.5
				12	6	24.9	25.0	24.8	0	25.5	20.7	21.0	20.8	0	21.5

NR Band 66 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	Mode	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745 MHz		MPR	Tune-up Limit		349000 1745 MHz		MPR	Tune-up Limit
40	DFT-s	15	$\pi/2$ BPSK	1	1				0	19.1			0	19.3	
				1	107				0	19.1			0	19.3	
				1	214				0	19.1			0	19.3	
				108	54				0	19.1			0	19.3	
		QPSK	1	1				0	19.1			0	19.3		
			1	107				0	19.1			0	19.3		
			1	214				0	19.1			0	19.3		
			108	54				0	19.1			0	19.3		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							349000 1745 MHz		MPR	Tune-up Limit		349000 1745 MHz		MPR	Tune-up Limit
30	DFT-s	15	$\pi/2$ BPSK	1	1				0	19.1			0	19.3	
				1	79				0	19.1			0	19.3	
				1	158				0	19.1			0	19.3	
				80	40				0	19.1			0	19.3	
		QPSK	1	1				0	19.1			0	19.3		
			1	79				0	19.1			0	19.3		
			1	158				0	19.1			0	19.3		
			80	40				0	19.1			0	19.3		
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit	344000 1720 MHz	349000 1745 MHz	354000 1770 MHz	MPR	Tune-up Limit
20	DFT-s	15	$\pi/2$ BPSK	1	1	18.7	18.6	18.6	0	19.1	18.6	18.6	18.6	0	19.3
				1	52	18.6	18.5	18.5	0	19.1	18.7	18.6	18.5	0	19.3
				1	104	18.8	18.6	18.6	0	19.1	18.7	18.6	18.6	0	19.3
				50	25	18.7	18.5	18.5	0	19.1	18.7	18.6	18.5	0	19.3
		QPSK	1	1	18.7	18.5	18.6	0	19.1	18.7	18.6	18.7	0	19.3	
			1	52	18.8	18.5	18.6	0	19.1	18.7	18.5	18.6	0	19.3	
			1	104	18.8	18.6	18.6	0	19.1	18.6	18.6	18.6	0	19.3	
			50	25	18.7	18.5	18.6	0	19.1	18.7	18.5	18.6	0	19.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit	343500 1717.5 MHz	349000 1745 MHz	354500 1772.5 MHz	MPR	Tune-up Limit
15	DFT-s	15	$\pi/2$ BPSK	1	1	18.7	18.6	18.6	0	19.1	18.7	18.5	18.6	0	19.3
				1	39	18.7	18.6	18.5	0	19.1	18.7	18.5	18.5	0	19.3
				1	77	18.7	18.6	18.5	0	19.1	18.7	18.6	18.6	0	19.3
				36	18	18.6	18.5	18.4	0	19.1	18.7	18.5	18.4	0	19.3
		QPSK	1	1	18.8	18.6	18.6	0	19.1	18.6	18.5	18.6	0	19.3	
			1	39	18.7	18.6	18.5	0	19.1	18.7	18.5	18.5	0	19.3	
			1	77	18.8	18.6	18.6	0	19.1	18.7	18.5	18.6	0	19.3	
			36	18	18.7	18.5	18.5	0	19.1	18.7	18.5	18.5	0	19.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit	343000 1715 MHz	349000 1745 MHz	355000 1775 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	18.6	18.4	18.5	0	19.1	18.6	18.4	18.6	0	19.3
				1	25	18.6	18.5	18.5	0	19.1	18.6	18.6	18.5	0	19.3
				1	50	18.6	18.5	18.6	0	19.1	18.6	18.5	18.5	0	19.3
				25	12	18.6	18.5	18.4	0	19.1	18.5	18.5	18.5	0	19.3
		QPSK	1	1	18.7	18.8	18.5	0	19.1	18.6	18.8	18.5	0	19.3	
			1	25	18.6	18.4	18.5	0	19.1	18.6	18.4	18.5	0	19.3	
			1	50	18.6	18.7	18.5	0	19.1	18.6	18.6	18.4	0	19.3	
			25	12	18.5	18.5	18.5	0	19.1	18.6	18.5	18.5	0	19.3	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit	342500 1712.5 MHz	349000 1745 MHz	355500 1777.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	18.6	18.6	18.4	0	19.1	18.6	18.6	18.5	0	19.3
				1	12	18.6	18.7	18.5	0	19.1	18.5	18.6	18.4	0	19.3
				1	23	18.6	18.6	18.5	0	19.1	18.6	18.6	18.4	0	19.3
				12	6	18.6	18.6	18.5	0	19.1	18.6	18.5	18.4	0	19.3
		QPSK	1	1	18.7	18.6	18.5	0	19.1	18.6	18.5	18.5	0	19.3	
			1	12	18.6	18.6	18.4	0	19.1	18.6	18.6	18.5	0	19.3	
			1	23	18.6	18.6	18.4	0	19.1	18.6	18.7	18.5	0	19.3	
			12	6	18.6	18.6	18.4	0	19.1	18.6	18.6	18.4	0	19.3	

NR Band 70 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							340500		MPR	Tune-up Limit		340500		MPR	Tune-up Limit
							1702.5 MHz					1702.5 MHz			
15	DFT-s	15	π/2 BPSK	1	1		24.1		0	24.8		17.7		0	18.1
				1	39		24.2		0	24.8		17.8		0	18.1
				1	77		24.1		0	24.8		17.6		0	18.1
				36	18		24.2		0	24.8		17.8		0	18.1
			QPSK	1	1		24.1		0	24.8		17.6		0	18.1
				1	39		24.1		0	24.8		17.7		0	18.1
				1	77		24.1		0	24.8		17.7		0	18.1
				36	18		24.1		0	24.8		17.7		0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							340500		MPR	Tune-up Limit		340500		MPR	Tune-up Limit
							1702.5 MHz					1702.5 MHz			
10	DFT-s	15	π/2 BPSK	1	1		23.9		0	24.8		17.3		0	18.1
				1	25		24.1		0	24.8		17.3		0	18.1
				1	50		24.0		0	24.8		17.3		0	18.1
				25	12		24.0		0	24.8		17.3		0	18.1
			QPSK	1	1		24.0		0	24.8		17.3		0	18.1
				1	25		24.0		0	24.8		17.3		0	18.1
				1	50		24.0		0	24.8		17.3		0	18.1
				25	12		24.0		0	24.8		17.3		0	18.1
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
						339500	340500	341500	MPR	Tune-up Limit	339500	340500	341500	MPR	Tune-up Limit
						1697.5 MHz	1702.5 MHz	1707.5 MHz			1697.5 MHz	1702.5 MHz	1707.5 MHz		
5	DFT-s	15	π/2 BPSK	1	1	23.9	23.9	23.9	0	24.8	17.3	17.3	17.3	0	18.1
				1	12	24.0	24.0	24.0	0	24.8	17.3	17.3	17.3	0	18.1
				1	23	24.0	24.0	24.0	0	24.8	17.3	17.3	17.3	0	18.1
				12	6	24.0	24.0	24.0	0	24.8	17.3	17.3	17.3	0	18.1
			QPSK	1	1	23.9	23.9	23.9	0	24.8	17.3	17.3	17.3	0	18.1
				1	12	24.0	24.0	24.0	0	24.8	17.3	17.3	17.3	0	18.1
				1	23	23.8	23.8	23.8	0	24.8	17.3	17.3	17.3	0	18.1
				12	6	24.0	24.0	24.0	0	24.8	17.3	17.3	17.3	0	18.1

NR Band 70 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1		20.3		0	21		21.1		0	21.3
				1	39		20.4		0	21		21.1		0	21.3
				1	77		20.4		0	21		21.0		0	21.3
				36	18		20.4		0	21		21.0		0	21.3
			QPSK	1	1		20.2		0	21		21.0		0	21.3
				1	39		20.3		0	21		21.1		0	21.3
				1	77		20.3		0	21		21.0		0	21.3
				36	18		20.2		0	21		21.0		0	21.3
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1		20.3		0	21		20.9		0	21.3
				1	25		20.3		0	21		20.9		0	21.3
				1	50		20.3		0	21		20.9		0	21.3
				25	12		20.3		0	21		20.8		0	21.3
			QPSK	1	1		20.3		0	21		20.9		0	21.3
				1	25		20.3		0	21		20.9		0	21.3
				1	50		20.3		0	21		20.9		0	21.3
				25	12		20.3		0	21		20.8		0	21.3
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						339500 1697.5 MHz	340500 1702.5 MHz	341500 1707.5 MHz	MPR	Tune-up Limit	339500 1697.5 MHz	340500 1702.5 MHz	341500 1707.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	π/2 BPSK	1	1	20.2	20.3	20.3	0	21	20.8	20.8	20.8	0	21.3
				1	12	20.3	20.3	20.3	0	21	20.9	20.9	20.9	0	21.3
				1	23	20.1	20.1	20.1	0	21	20.8	20.8	20.8	0	21.3
				12	6	20.3	20.3	20.3	0	21	20.8	20.8	20.8	0	21.3
			QPSK	1	1	20.1	20.1	20.1	0	21	20.9	20.9	20.9	0	21.3
				1	12	20.0	20.0	20.0	0	21	20.8	20.8	20.8	0	21.3
				1	23	20.0	20.0	20.0	0	21	20.8	20.8	20.8	0	21.3
				12	6	20.1	20.2	20.1	0	21	20.8	20.8	20.8	0	21.3

NR Band 70 Measured Results (ANT3)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
15	DFT-s	15	π/2 BPSK	1	1		24.6		0	25.5		20.8		0	21.5
				1	39		24.8		0	25.5		21.1		0	21.5
				1	77		24.6		0	25.5		21.0		0	21.5
				36	18		24.7		0	25.5		21.0		0	21.5
			QPSK	1	1		24.7		0	25.5		21.0		0	21.5
				1	39		24.7		0	25.5		21.0		0	21.5
				1	77		24.7		0	25.5		21.0		0	21.5
				36	18		24.7		0	25.5		21.0		0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
10	DFT-s	15	π/2 BPSK	1	1		24.7		0	25.5		20.7		0	21.5
				1	25		24.6		0	25.5		20.7		0	21.5
				1	50		24.6		0	25.5		20.7		0	21.5
				25	12		24.6		0	25.5		20.7		0	21.5
			QPSK	1	1		24.7		0	25.5		20.7		0	21.5
				1	25		24.6		0	25.5		20.7		0	21.5
				1	50		24.7		0	25.5		20.7		0	21.5
				25	12		24.6		0	25.5		20.7		0	21.5
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)					
						339500	340500	341500	MPR	Tune-up Limit	339500	340500	341500	MPR	Tune-up Limit
	1697.5 MHz	1702.5 MHz	1707.5 MHz	1697.5 MHz	1702.5 MHz	1707.5 MHz									
5	DFT-s	15	π/2 BPSK	1	1	24.5	24.5	24.5	0	25.5	20.5	20.5	20.5	0	21.5
				1	12	24.6	24.6	24.6	0	25.5	20.7	20.7	20.7	0	21.5
				1	23	24.5	24.5	24.5	0	25.5	20.6	20.6	20.6	0	21.5
				12	6	24.6	24.6	24.6	0	25.5	20.7	20.7	20.7	0	21.5
			QPSK	1	1	24.5	24.5	24.5	0	25.5	20.5	20.5	20.5	0	21.5
				1	12	24.6	24.6	24.6	0	25.5	20.7	20.7	20.7	0	21.5
				1	23	24.5	24.5	24.5	0	25.5	20.7	20.7	20.7	0	21.5
				12	6	24.6	24.6	24.6	0	25.5	20.5	20.5	20.5	0	21.5

NR Band 70 Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
15	DFT-s	30	π/2 BPSK	1	1		18.5		0	19.1		18.5		0	19.3
				1	18		18.6		0	19.1		18.6		0	19.3
				1	36		18.5		0	19.1		18.5		0	19.3
				18	9		18.6		0	19.1		18.6		0	19.3
			QPSK	1	1		18.4		0	19.1		18.4		0	19.3
				1	18		18.5		0	19.1		18.5		0	19.3
				1	36		18.5		0	19.1		18.5		0	19.3
				18	9		18.4		0	19.1		18.4		0	19.3
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							340500 1702.5 MHz		MPR	Tune-up Limit		340500 1702.5 MHz		MPR	Tune-up Limit
10	DFT-s	30	π/2 BPSK	1	1		18.4		0	19.1		18.4		0	19.3
				1	11		18.5		0	19.1		18.5		0	19.3
				1	22		18.6		0	19.1		18.6		0	19.3
				12	6		18.5		0	19.1		18.5		0	19.3
			QPSK	1	1		18.4		0	19.1		18.4		0	19.3
				1	11		18.5		0	19.1		18.5		0	19.3
				1	22		18.6		0	19.1		18.6		0	19.3
				12	6		18.6		0	19.1		18.6		0	19.3
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						339500 1697.5 MHz	340500 1702.5 MHz	341500 1707.5 MHz	MPR	Tune-up Limit	339500 1697.5 MHz	340500 1702.5 MHz	341500 1707.5 MHz	MPR	Tune-up Limit
5	DFT-s	30	π/2 BPSK	1	1	18.4	18.4	18.4	0	19.1	18.4	18.4	18.4	0	19.3
				1	11	18.5	18.5	18.5	0	19.1	18.5	18.5	18.5	0	19.3
				1	22	18.5	18.5	18.5	0	19.1	18.5	18.5	18.5	0	19.3
				12	6	18.5	18.5	18.5	0	19.1	18.5	18.5	18.5	0	19.3
			QPSK	1	1	18.4	18.4	18.4	0	19.1	18.4	18.4	18.4	0	19.3
				1	11	18.5	18.5	18.5	0	19.1	18.5	18.5	18.5	0	19.3
				1	22	18.5	18.5	18.5	0	19.1	18.5	18.5	18.5	0	19.3
				12	6	18.6	18.5	18.6	0	19.1	18.6	18.5	18.6	0	19.3

NR Band 71 Measured Results (ANT1)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)					
							136100 680.5 MHz		MPR	Tune-up Limit		136100 680.5 MHz		MPR	Tune-up Limit	
20	DFT-s	15	$\pi/2$ BPSK	1	1		25.0		0	25.7		25.0		0	25.7	
				1	52		25.2		0	25.7		25.2		0	25.7	
				1	104		25.1		0	25.7		25.1		0	25.7	
				50	25		25.0		0	25.7		25.0		0	25.7	
				1	1		25.1		0	25.7		25.1		0	25.7	
			QPSK	1	52		25.0		0	25.7		25.0		0	25.7	
				1	104		25.0		0	25.7		25.0		0	25.7	
				50	25		25.0		0	25.7		25.0		0	25.7	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)					
						136100 680.5 MHz		MPR	Tune-up Limit		136100 680.5 MHz		MPR	Tune-up Limit		
15	DFT-s	15	$\pi/2$ BPSK	1	1		24.9		0	25.7		24.9		0	25.7	
				1	39		25.0		0	25.7		25.0		0	25.7	
				1	77		25.0		0	25.7		25.0		0	25.7	
				36	18		25.0		0	25.7		25.0		0	25.7	
				1	1		25.0		0	25.7		25.0		0	25.7	
			QPSK	1	39		25.0		0	25.7		25.0		0	25.7	
				1	77		25.0		0	25.7		25.0		0	25.7	
				36	18		25.0		0	25.7		25.0		0	25.7	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)					
						133600 668 MHz	136100 680.5 MHz	138600 693 MHz	MPR	Tune-up Limit		133600 668 MHz	136100 680.5 MHz	138600 693 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	25.1	24.9	24.9	0	25.7	25.1	24.9	24.9	0	25.7	
				1	25	25.1	24.8	24.9	0	25.7	25.1	24.8	24.9	0	25.7	
				1	50	25.0	24.9	24.8	0	25.7	25.0	24.9	24.8	0	25.7	
				25	12	25.0	24.8	24.8	0	25.7	25.0	24.8	24.8	0	25.7	
				1	1	24.8	24.9	24.9	0	25.7	24.8	24.9	24.9	0	25.7	
			QPSK	1	25	24.8	24.8	24.9	0	25.7	24.8	24.8	24.9	0	25.7	
				1	50	24.8	24.9	24.8	0	25.7	24.8	24.9	24.8	0	25.7	
				25	12	24.8	24.8	24.8	0	25.7	24.8	24.8	24.8	0	25.7	
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)					
						133100 665.5 MHz	136100 680.5 MHz	139100 695.5 MHz	MPR	Tune-up Limit		133100 665.5 MHz	136100 680.5 MHz	139100 695.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	25.1	24.8	24.9	0	25.7	25.1	24.8	24.9	0	25.7	
				1	12	25.1	24.8	24.9	0	25.7	25.1	24.8	24.9	0	25.7	
				1	23	25.1	24.8	24.8	0	25.7	25.1	24.8	24.8	0	25.7	
				12	6	25.2	24.8	24.8	0	25.7	25.2	24.8	24.8	0	25.7	
				1	1	25.0	25.0	24.9	0	25.7	25.0	25.0	24.9	0	25.7	
			QPSK	1	12	24.9	24.8	24.9	0	25.7	24.9	24.8	24.9	0	25.7	
				1	23	24.8	24.8	24.8	0	25.7	24.8	24.8	24.8	0	25.7	
				12	6	24.9	24.8	24.8	0	25.7	24.9	24.8	24.8	0	25.7	

NR Band 71 Measured Results (ANT2)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
							136100 680.5 MHz		MPR	Tune-up Limit		136100 680.5 MHz		MPR	Tune-up Limit
20	DFT-s	15	$\pi/2$ BPSK	1	1		24.3		0	24.7		24.3		0	24.7
				1	52		24.4		0	24.7		24.4		0	24.7
				1	104		24.2		0	24.7		24.2		0	24.7
				50	25		24.2		0	24.7		24.2		0	24.7
				1	1		23.9		0	24.7		23.9		0	24.7
			QPSK	1	52		24.0		0	24.7		24.0		0	24.7
				1	104		24.0		0	24.7		24.0		0	24.7
				50	25		24.2		0	24.7		24.2		0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						136100 680.5 MHz		MPR	Tune-up Limit		136100 680.5 MHz		MPR	Tune-up Limit	
15	DFT-s	15	$\pi/2$ BPSK	1	1		23.9		0	24.7		23.9		0	24.7
				1	39		24.1		0	24.7		24.1		0	24.7
				1	77		24.0		0	24.7		24.0		0	24.7
				36	18		24.0		0	24.7		24.0		0	24.7
				1	1		24.0		0	24.7		24.0		0	24.7
			QPSK	1	39		24.0		0	24.7		24.0		0	24.7
				1	77		24.1		0	24.7		24.1		0	24.7
				36	18		24.0		0	24.7		24.0		0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						133600 668 MHz	136100 680.5 MHz	138600 693 MHz	MPR	Tune-up Limit	133600 668 MHz	136100 680.5 MHz	138600 693 MHz	MPR	Tune-up Limit
10	DFT-s	15	$\pi/2$ BPSK	1	1	24.1	24.0	24.1	0	24.7	24.1	24.0	24.1	0	24.7
				1	25	24.1	24.0	24.0	0	24.7	24.1	24.0	24.0	0	24.7
				1	50	23.9	24.0	24.0	0	24.7	23.9	24.0	24.0	0	24.7
				25	12	24.0	23.9	23.9	0	24.7	24.0	23.9	23.9	0	24.7
				1	1	24.1	24.0	24.0	0	24.7	24.1	24.0	24.0	0	24.7
			QPSK	1	25	24.1	24.0	24.0	0	24.7	24.1	24.0	24.0	0	24.7
				1	50	24.0	23.9	23.9	0	24.7	24.0	23.9	23.9	0	24.7
				25	12	24.0	23.9	24.0	0	24.7	24.0	23.9	24.0	0	24.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						133100 665.5 MHz	136100 680.5 MHz	139100 695.5 MHz	MPR	Tune-up Limit	133100 665.5 MHz	136100 680.5 MHz	139100 695.5 MHz	MPR	Tune-up Limit
5	DFT-s	15	$\pi/2$ BPSK	1	1	24.1	24.0	24.1	0	24.7	24.1	24.0	24.1	0	24.7
				1	12	24.1	24.0	24.0	0	24.7	24.1	24.0	24.0	0	24.7
				1	23	24.0	23.9	24.0	0	24.7	24.0	23.9	24.0	0	24.7
				12	6	24.0	24.0	24.1	0	24.7	24.0	24.0	24.1	0	24.7
				1	1	24.1	23.9	24.0	0	24.7	24.1	23.9	24.0	0	24.7
			QPSK	1	12	24.1	23.9	24.1	0	24.7	24.1	23.9	24.1	0	24.7
				1	23	24.0	24.0	24.1	0	24.7	24.0	24.0	24.1	0	24.7
				12	6	24.0	24.0	24.0	0	24.7	24.0	24.0	24.0	0	24.7

NR Band 77 (Block A) Measured Results (ANT7)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	25.1		0	25.5			0	19
				1	136	25.2		0	25.5			0	19
				1	271	25.0		0	25.5			0	19
				135	67	25.2		0	25.5			0	19
			QPSK	1	1	25.0		0	25.5			0	19
				1	136	24.9		0	25.5			0	19
				1	271	24.9		0	25.5			0	19
				135	67	24.9		0	25.5			0	19
90	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5			0	19
				1	122	24.9		0	25.5			0	19
				1	243	25.0		0	25.5			0	19
				121	60	25.0		0	25.5			0	19
			QPSK	1	1	24.9		0	25.5			0	19
				1	122	24.9		0	25.5			0	19
				1	243	25.1		0	25.5			0	19
				121	60	24.9		0	25.5			0	19
80	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5			0	19
				1	108	25.0		0	25.5			0	19
				1	215	25.0		0	25.5			0	19
				108	54	25.0		0	25.5			0	19
			QPSK	1	1	25.1		0	25.5			0	19
				1	108	25.0		0	25.5			0	19
				1	215	25.1		0	25.5			0	19
				108	54	25.0		0	25.5			0	19
70	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5			0	19
				1	91	25.1		0	25.5			0	19
				1	187	25.1		0	25.5			0	19
				94	47	24.9		0	25.5			0	19
			QPSK	1	1	25.0		0	25.5			0	19
				1	91	25.0		0	25.5			0	19
				1	187	25.0		0	25.5			0	19
				94	47	24.9		0	25.5			0	19
60	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5			0	19
				1	80	25.1		0	25.5			0	19
				1	160	25.1		0	25.5			0	19
				81	40	25.0		0	25.5			0	19
			QPSK	1	1	25.0		0	25.5			0	19
				1	80	25.1		0	25.5			0	19
				1	160	25.1		0	25.5			0	19
				81	40	25.1		0	25.5			0	19
50	DFT-s	30	$\pi/2$ BPSK	1	1	25.1		0	25.5			0	19
				1	66	25.0		0	25.5			0	19
				1	131	25.1		0	25.5			0	19
				64	32	25.1		0	25.5			0	19
			QPSK	1	1	25.0		0	25.5			0	19
				1	66	25.1		0	25.5			0	19
				1	131	25.0		0	25.5			0	19
				64	32	25.0		0	25.5			0	19
40	DFT-s	30	$\pi/2$ BPSK	1	1	25.1		0	25.5			0	19
				1	52	25.1		0	25.5			0	19
				1	104	25.0		0	25.5			0	19
				50	25	25.0		0	25.5			0	19
			QPSK	1	1	25.1		0	25.5			0	19
				1	52	25.1		0	25.5			0	19
				1	104	25.0		0	25.5			0	19
				50	25	25.1		0	25.5			0	19
30	DFT-s	30	$\pi/2$ BPSK	1	1	25.1		0	25.5			0	19
				1	38	25.0		0	25.5			0	19
				1	76	25.1		0	25.5			0	19
				36	18	25.0		0	25.5			0	19
			QPSK	1	1	25.0		0	25.5			0	19
				1	38	25.0		0	25.5			0	19
				1	76	25.1		0	25.5			0	19
				36	18	25.0		0	25.5			0	19

NR Band 77 (Block A) Measured Results (ANT7) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630832	633332	635832	MPR	Tune-up Limit	630832	633332	635832	MPR	Tune-up Limit
						3462.48 MHz	3499.98 MHz	3537.48 MHz			3462.48 MHz	3499.98 MHz	3537.48 MHz		
25	DFT-s	30	$\pi/2$ BPSK	1	1	25.0	25.0	25.0	0	25.5	18.8	18.8	18.7	0	19
				1	32	25.1	25.0	25.0	0	25.5	18.7	18.7	18.7	0	19
				1	63	25.0	25.0	24.9	0	25.5	18.7	18.8	18.7	0	19
				32	16	25.0	25.0	25.0	0	25.5	18.7	18.7	18.6	0	19
			QPSK	1	1	25.0	25.0	25.1	0	25.5	18.7	18.9	18.7	0	19
				1	32	25.0	25.0	25.0	0	25.5	18.7	18.7	18.7	0	19
				1	63	25.1	25.1	25.0	0	25.5	18.8	18.8	18.7	0	19
				32	16	25.0	25.0	25.0	0	25.5	18.7	18.8	18.6	0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630666	633332	635998	MPR	Tune-up Limit	630666	633332	635998	MPR	Tune-up Limit
						3459.99 MHz	3499.98 MHz	3539.97 MHz			3459.99 MHz	3499.98 MHz	3539.97 MHz		
20	DFT-s	30	$\pi/2$ BPSK	1	1	25.1	25.1	25.1	0	25.5	18.8	18.6	18.7	0	19
				1	25	25.0	25.1	25.0	0	25.5	18.8	18.6	18.8	0	19
				1	49	25.1	25.0	25.1	0	25.5	18.9	18.6	18.7	0	19
				25	12	25.0	25.0	25.1	0	25.5	18.9	18.6	18.7	0	19
			QPSK	1	1	25.0	25.0	25.0	0	25.5	18.8	18.8	18.7	0	19
				1	25	25.0	25.0	25.1	0	25.5	18.9	18.8	18.7	0	19
				1	49	25.0	24.8	25.1	0	25.5	18.9	18.8	18.7	0	19
				25	12	25.0	25.1	25.1	0	25.5	18.8	18.7	18.7	0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630500	633332	636166	MPR	Tune-up Limit	630500	633332	636166	MPR	Tune-up Limit
						3457.5 MHz	3499.98 MHz	3542.49 MHz			3457.5 MHz	3499.98 MHz	3542.49 MHz		
15	DFT-s	30	$\pi/2$ BPSK	1	1	25.1	25.1	25.1	0	25.5	18.8	18.9	18.8	0	19
				1	18	25.1	25.1	25.1	0	25.5	18.8	18.8	18.8	0	19
				1	36	25.1	25.0	25.0	0	25.5	18.8	18.8	18.8	0	19
				18	9	25.0	25.1	25.0	0	25.5	18.8	18.8	18.7	0	19
			QPSK	1	1	25.1	25.1	25.1	0	25.5	18.8	18.8	18.8	0	19
				1	18	25.1	25.1	25.0	0	25.5	18.7	18.8	18.8	0	19
				1	36	25.1	25.1	25.1	0	25.5	18.8	18.8	18.7	0	19
				18	9	25.1	25.1	25.0	0	25.5	18.7	18.8	18.7	0	19
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630332	633332	636332	MPR	Tune-up Limit	630332	633332	636332	MPR	Tune-up Limit
						3454.98 MHz	3499.98 MHz	3544.98 MHz			3454.98 MHz	3499.98 MHz	3544.98 MHz		
10	DFT-s	30	$\pi/2$ BPSK	1	1	25.0	25.1	25.0	0	25.5	18.7	18.7	18.7	0	19
				1	11	25.1	25.0	25.1	0	25.5	18.8	18.7	18.7	0	18.8
				1	22	25.1	25.0	25.1	0	25.5	18.8	18.7	18.7	0	19
				12	6	25.0	25.1	25.0	0	25.5	18.8	18.6	18.7	0	19
			QPSK	1	1	25.1	25.0	25.1	0	25.5	18.8	18.7	18.7	0	19
				1	11	25.0	25.0	25.0	0	25.5	18.8	18.7	18.7	0	19
				1	22	25.1	25.1	25.1	0	25.5	18.8	18.7	18.7	0	19
				12	6	25.0	25.1	25.0	0	25.5	18.8	18.7	18.7	0	19

NR Band 77 (Block C) Measured Results (ANT7)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						656000	3840 MHz	MFR	Tune-up Limit	656000	3840 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	25.2		0	25.5	18.2		0	19
				1	136	25.3		0	25.5	18.3		0	19
				1	271	25.3		0	25.5	18.2		0	19
				135	67	25.3		0	25.5	18.3		0	19
				1	1	25.2		0	25.5	18.2		0	19
			QPSK	1	136	25.3		0	25.5	18.2		0	19
				1	271	25.2		0	25.5	18.2		0	19
				135	67	25.2		0	25.5	18.0		0	19
				1	1	25.2		0	25.5	18.2		0	19
				1	136	25.3		0	25.5	18.2		0	19
90	DFT-s	30	$\pi/2$ BPSK	1	1	25.2		0	25.5	18.0		0	19
				1	122	25.3		0	25.5	18.1		0	19
				1	243	25.3		0	25.5	18.0		0	19
				121	60	25.2		0	25.5	18.0		0	19
				1	1	25.2		0	25.5	18.2		0	19
			QPSK	1	122	25.3		0	25.5	18.2		0	19
				1	243	25.3		0	25.5	18.2		0	19
				121	60	25.1		0	25.5	18.0		0	19
				1	1	25.2		0	25.5	18.2		0	19
				1	122	25.3		0	25.5	18.1		0	19
80	DFT-s	30	$\pi/2$ BPSK	1	1	25.2		0	25.5	18.2		0	19
				1	108	25.2		0	25.5	18.1		0	19
				1	215	25.3		0	25.5	18.1		0	19
				108	54	25.2		0	25.5	18.1		0	19
				1	1	25.2		0	25.5	18.1		0	19
			QPSK	1	108	25.3		0	25.5	18.2		0	19
				1	215	25.3		0	25.5	18.1		0	19
				108	54	25.2		0	25.5	18.2		0	19
				1	1	25.2		0	25.5	18.2		0	19
				1	108	25.3		0	25.5	18.1		0	19
70	DFT-s	30	$\pi/2$ BPSK	1	1	25.3		0	25.5	18.2		0	19
				1	91	25.3		0	25.5	18.2		0	19
				1	187	25.2		0	25.5	18.1		0	19
				94	47	25.2		0	25.5	18.1		0	19
				1	1	25.2		0	25.5	18.2		0	19
			QPSK	1	91	25.3		0	25.5	18.2		0	19
				1	187	25.3		0	25.5	18.1		0	19
				94	47	25.2		0	25.5	18.1		0	19
				1	1	25.2		0	25.5	18.2		0	19
				1	91	25.3		0	25.5	18.2		0	19
60	DFT-s	30	$\pi/2$ BPSK	1	1	25.2		0	25.5	18.1		0	19
				1	80	25.2		0	25.5	18.1		0	19
				1	160	25.2		0	25.5	18.2		0	19
				81	40	25.2		0	25.5	18.2		0	19
				1	1	25.2		0	25.5	18.1		0	19
			QPSK	1	80	25.2		0	25.5	18.1		0	19
				1	160	25.3		0	25.5	18.2		0	19
				81	40	25.2		0	25.5	18.2		0	19
				1	1	25.2		0	25.5	18.2		0	19
				1	80	25.3		0	25.5	18.2		0	19
50	DFT-s	30	$\pi/2$ BPSK	1	1	25.1		0	25.5	18.2		0	19
				1	66	25.3		0	25.5	18.2		0	19
				1	131	25.1		0	25.5	18.2		0	19
				64	32	25.2		0	25.5	18.2		0	19
				1	1	25.3		0	25.5	18.2		0	19
			QPSK	1	66	25.2		0	25.5	18.2		0	19
				1	131	25.1		0	25.5	18.2		0	19
				64	32	25.2		0	25.5	18.2		0	19
				1	1	25.1		0	25.5	18.2		0	19
				1	66	25.2		0	25.5	18.2		0	19
40	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5	18.2		0	19
				1	52	25.0		0	25.5	18.2		0	19
				1	104	25.0		0	25.5	18.2		0	19
				50	25	25.0		0	25.5	18.1		0	19
				1	1	25.2		0	25.5	18.2		0	19
			QPSK	1	52	25.0		0	25.5	18.2		0	19
				1	104	25.0		0	25.5	18.2		0	19
				50	25	25.0		0	25.5	18.2		0	19
				1	1	25.0		0	25.5	18.1		0	19
				1	52	25.0		0	25.5	18.2		0	19
30	DFT-s	30	$\pi/2$ BPSK	1	1	24.9		0	25.5	18.1		0	19
				1	38	24.8		0	25.5	18.0		0	19
				1	76	24.9		0	25.5	18.1		0	19
				36	18	24.9		0	25.5	18.1		0	19
				1	1	24.9		0	25.5	18.1		0	19
			QPSK	1	38	24.9		0	25.5	18.1		0	19
				1	76	24.9		0	25.5	18.2		0	19
				36	18	24.7		0	25.5	18.1		0	19
				1	1	24.9		0	25.5	18.2		0	19
				1	38	24.8		0	25.5	18.1		0	19

NR Band 77 (Block C) Measured Results (ANT7) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647498	651748	656000	660248	664498	MFR	647498	651748	656000	660248	664498	MFR
						3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz		3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz	
25	DFT-s	30	$\pi/2$ BPSK	1	1	25.1	24.9	25.1	24.8	24.8	0	25.5	18.1	18.2	18.3	18.3	0
					32	25.1	24.9	25.1	24.9	24.9	0	25.5	18.2	18.2	18.2	18.3	0
					63	25.0	24.9	25.1	24.8	24.9	0	25.5	18.1	18.2	18.2	18.3	0
				32	16	25.1	24.8	25.1	25.0	24.9	0	25.5	18.1	18.2	18.3	18.3	0
					1	25.0	25.0	25.1	24.9	24.8	0	25.5	18.3	18.3	18.2	18.3	0
					32	25.0	24.9	25.1	24.8	24.9	0	25.5	18.3	18.2	18.2	18.2	0
			QPSK	1	63	25.0	24.8	25.1	24.8	24.9	0	25.5	18.3	18.2	18.3	18.3	0
					32	24.8	24.8	25.1	24.9	24.8	0	25.5	18.2	18.3	18.3	18.1	0
					16	24.8	24.8	25.1	24.9	24.8	0	25.5	18.2	18.3	18.3	18.1	0
				1	32	25.0	24.9	25.1	24.8	24.9	0	25.5	18.3	18.2	18.2	18.2	0
					63	25.0	24.8	25.1	24.8	24.9	0	25.5	18.3	18.2	18.3	18.3	0
					32	24.8	24.8	25.1	24.9	24.8	0	25.5	18.2	18.3	18.3	18.1	0
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647332	651666	656000	660332	664666	MFR	647332	651666	656000	660332	664666	MFR
						3709.98 MHz	3774.99 MHz	3840 MHz	3904.98 MHz	3969.99 MHz		3709.98 MHz	3774.99 MHz	3840 MHz	3904.98 MHz	3969.99 MHz	
20	DFT-s	30	$\pi/2$ BPSK	1	1	24.9	24.9	25.1	24.9	24.8	0	25.5	18.2	18.1	18.2	18.1	0
					25	24.8	25.0	25.1	24.9	24.9	0	25.5	18.1	18.2	18.1	18.1	0
					49	24.8	24.8	25.0	25.0	24.8	0	25.5	18.0	18.2	18.1	18.1	0
				25	12	24.8	24.9	25.1	24.8	24.9	0	25.5	18.2	18.1	18.2	18.2	0
					1	24.8	25.0	25.1	25.0	24.9	0	25.5	18.1	18.1	18.1	18.2	0
					25	24.8	24.9	25.1	24.8	24.9	0	25.5	18.2	18.0	18.1	18.1	0
			QPSK	1	49	24.8	24.9	25.1	24.9	24.9	0	25.5	18.2	18.2	18.2	18.1	0
					25	24.8	24.8	25.0	24.8	24.8	0	25.5	18.2	18.1	18.1	18.1	0
					12	24.8	24.8	25.0	24.8	24.8	0	25.5	18.2	18.1	18.1	18.1	0
				1	1	24.9	24.9	25.1	24.8	24.9	0	25.5	18.1	18.2	18.2	18.2	0
					18	24.8	24.8	25.1	24.9	24.8	0	25.5	18.2	18.2	18.2	18.1	0
					36	24.9	24.9	25.0	24.8	24.9	0	25.5	18.1	18.2	18.3	18.1	0
15	DFT-s	30	$\pi/2$ BPSK	1	1	24.9	24.9	25.1	24.8	24.9	0	25.5	18.1	18.2	18.3	18.2	0
					18	24.8	24.8	25.1	24.9	24.8	0	25.5	18.2	18.2	18.2	18.1	0
					36	24.9	24.9	25.0	24.8	24.9	0	25.5	18.1	18.2	18.3	18.1	0
				18	9	24.9	24.9	25.0	24.8	24.9	0	25.5	18.1	18.2	18.3	18.2	0
					1	25.0	24.8	25.1	24.8	24.8	0	25.5	18.3	18.3	18.1	18.1	0
					18	24.9	25.0	25.1	24.8	24.8	0	25.5	18.3	18.2	18.0	18.1	0
			QPSK	1	36	24.8	24.8	25.1	25.0	24.8	0	25.5	18.3	18.2	18.2	18.2	0
					18	24.9	24.9	25.0	24.9	24.8	0	25.5	18.4	18.3	18.0	18.1	0
					9	24.9	24.9	25.0	24.9	24.8	0	25.5	18.4	18.3	18.0	18.1	0
				1	1	24.9	24.9	25.1	24.8	24.9	0	25.5	18.1	18.2	18.2	18.2	0
					11	24.8	24.8	25.1	24.8	24.9	0	25.5	18.0	18.1	18.2	18.1	0
					22	24.8	24.8	25.0	24.9	24.9	0	25.5	18.1	18.1	18.2	18.1	0
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						646998	651498	656000	660498	664998	MFR	646998	651498	656000	660498	664998	MFR
						3704.97 MHz	3772.47 MHz	3840 MHz	3907.47 MHz	3974.97 MHz		3704.97 MHz	3772.47 MHz	3840 MHz	3907.47 MHz	3974.97 MHz	
10	DFT-s	30	$\pi/2$ BPSK	1	1	24.9	25.0	25.1	25.0	24.9	0	25.5	18.1	18.1	18.1	18.2	0
					11	24.8	24.8	25.1	24.8	24.9	0	25.5	18.0	18.1	18.2	18.1	0
					22	24.8	24.8	25.0	24.9	24.9	0	25.5	18.1	18.1	18.2	18.1	0
				12	6	25.0	25.0	25.1	24.9	24.8	0	25.5	18.1	18.2	18.1	18.2	0
					1	24.8	24.9	25.1	24.8	24.8	0	25.5	18.2	18.1	18.1	18.1	0
					11	24.8	24.8	24.9	25.0	24.8	0	25.5	18.1	18.1	18.0	18.1	0
			QPSK	1	22	24.9	24.8	25.1	24.9	24.8	0	25.5	18.1	18.1	18.2	18.2	0
					12	25.0	24.9	25.1	24.8	24.9	0	25.5	18.1	18.1	18.1	18.3	0
					6	25.0	24.9	25.1	24.8	24.9	0	25.5	18.1	18.1	18.1	18.3	0
				1	11	24.8	24.8	24.9	25.0	24.8	0	25.5	18.1	18.1	18.0	18.1	0
					22	24.9	24.8	25.1	24.9	24.8	0	25.5	18.1	18.1	18.2	18.2	0
					12	25.0	24.9	25.1	24.8	24.9	0	25.5	18.1	18.1	18.1	18.3	0

NR Band 77 (Block A) Measured Results (ANT8)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.1		0	18.5
				1	136	18.8		0	19.2	18.1		0	18.5
				1	271	18.8		0	19.2	18.0		0	18.5
				135	67	18.8		0	19.2	18.1		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	136	18.8		0	19.2	18.0		0	18.5
				1	271	18.8		0	19.2	18.0		0	18.5
				135	67	18.8		0	19.2	18.0		0	18.5
90	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	122	18.8		0	19.2	18.0		0	18.5
				1	243	18.8		0	19.2	18.0		0	18.5
				121	60	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	122	18.8		0	19.2	18.0		0	18.5
				1	243	18.8		0	19.2	18.0		0	18.5
				121	60	18.8		0	19.2	18.0		0	18.5
80	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	108	18.8		0	19.2	18.0		0	18.5
				1	215	18.8		0	19.2	18.0		0	18.5
				108	54	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	108	18.8		0	19.2	18.0		0	18.5
				1	215	18.8		0	19.2	18.0		0	18.5
				108	54	18.8		0	19.2	18.0		0	18.5
70	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	91	18.8		0	19.2	18.0		0	18.5
				1	187	18.8		0	19.2	18.0		0	18.5
				94	47	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	91	18.8		0	19.2	18.0		0	18.5
				1	187	18.8		0	19.2	18.0		0	18.5
				94	47	18.8		0	19.2	18.0		0	18.5
60	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	80	18.8		0	19.2	18.0		0	18.5
				1	160	18.8		0	19.2	18.0		0	18.5
				81	40	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	80	18.8		0	19.2	18.0		0	18.5
				1	160	18.8		0	19.2	18.0		0	18.5
				81	40	18.8		0	19.2	18.0		0	18.5
50	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	66	18.8		0	19.2	18.0		0	18.5
				1	131	18.8		0	19.2	18.0		0	18.5
				64	32	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	66	18.8		0	19.2	18.0		0	18.5
				1	131	18.8		0	19.2	18.0		0	18.5
				64	32	18.8		0	19.2	18.0		0	18.5
40	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	52	18.8		0	19.2	18.0		0	18.5
				1	104	18.8		0	19.2	18.0		0	18.5
				50	25	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	52	18.8		0	19.2	18.0		0	18.5
				1	104	18.8		0	19.2	18.0		0	18.5
				50	25	18.8		0	19.2	18.0		0	18.5
30	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	38	18.8		0	19.2	18.0		0	18.5
				1	76	18.8		0	19.2	18.0		0	18.5
				36	18	18.8		0	19.2	18.0		0	18.5
			QPSK	1	1	18.8		0	19.2	18.0		0	18.5
				1	38	18.8		0	19.2	18.0		0	18.5
				1	76	18.8		0	19.2	18.0		0	18.5
				36	18	18.8		0	19.2	18.0		0	18.5

NR Band 77 (Block A) Measured Results (ANT8) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630832	633332	635832	MPR	Tune-up Limit	630832	633332	635832	MPR	Tune-up Limit
						3462.48 MHz	3499.98 MHz	3537.48 MHz			3462.48 MHz	3499.98 MHz	3537.48 MHz		
25	DFT-s	30	$\pi/2$ BPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	32	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	63	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				32	16	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
			QPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	32	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	63	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				32	16	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
20	DFT-s	30	$\pi/2$ BPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	25	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	49	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				25	12	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
			QPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	25	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	49	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				25	12	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
			$\pi/2$ BPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	18	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	36	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				18	9	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
15	DFT-s	30	$\pi/2$ BPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	18	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	36	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				18	9	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
			QPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	18	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	36	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				18	9	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
10	DFT-s	30	$\pi/2$ BPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	11	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	22	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				12	6	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
			QPSK	1	1	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	11	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				1	22	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5
				12	6	18.8	18.8	18.7	0	19.2	18.0	18.0	18.0	0	18.5

NR Band 77 (Block C) Measured Results (ANT8)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						656000	3840 MHz	MFR	Tune-up Limit	656000	3840 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	18.6		0	19.2	17.6		0	18.5
				1	136	18.9		0	19.2	17.7		0	18.5
				1	271	18.7		0	19.2	17.5		0	18.5
				135	67	18.8		0	19.2	17.7		0	18.5
				1	1	18.6		0	19.2	17.5		0	18.5
			QPSK	1	136	18.7		0	19.2	17.5		0	18.5
				1	271	18.8		0	19.2	17.5		0	18.5
				135	67	18.6		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	136	18.9		0	19.2	17.7		0	18.5
90	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	17.6		0	18.5
				1	122	18.9		0	19.2	17.6		0	18.5
				1	243	18.8		0	19.2	17.6		0	18.5
				121	60	18.8		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
			QPSK	1	122	18.9		0	19.2	17.5		0	18.5
				1	243	18.6		0	19.2	17.5		0	18.5
				121	60	18.9		0	19.2	17.7		0	18.5
				1	1	18.7		0	19.2	17.7		0	18.5
				1	122	18.9		0	19.2	17.7		0	18.5
80	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	17.7		0	18.5
				1	108	18.6		0	19.2	17.7		0	18.5
				1	215	18.6		0	19.2	17.6		0	18.5
				108	54	18.8		0	19.2	17.7		0	18.5
				1	1	18.7		0	19.2	17.6		0	18.5
			QPSK	1	108	18.9		0	19.2	17.5		0	18.5
				1	215	18.9		0	19.2	17.6		0	18.5
				108	54	18.7		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	108	18.9		0	19.2	17.7		0	18.5
70	DFT-s	30	$\pi/2$ BPSK	1	1	18.8		0	19.2	17.5		0	18.5
				1	91	18.9		0	19.2	17.7		0	18.5
				1	187	18.9		0	19.2	17.6		0	18.5
				94	47	18.6		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.6		0	18.5
			QPSK	1	91	18.8		0	19.2	17.5		0	18.5
				1	187	18.8		0	19.2	17.6		0	18.5
				94	47	18.7		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	91	18.9		0	19.2	17.7		0	18.5
60	DFT-s	30	$\pi/2$ BPSK	1	1	18.6		0	19.2	17.5		0	18.5
				1	80	18.7		0	19.2	17.5		0	18.5
				1	160	18.9		0	19.2	17.5		0	18.5
				81	40	18.8		0	19.2	17.6		0	18.5
				1	1	18.7		0	19.2	17.6		0	18.5
			QPSK	1	80	18.7		0	19.2	17.5		0	18.5
				1	160	18.7		0	19.2	17.6		0	18.5
				81	40	18.7		0	19.2	17.7		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	80	18.9		0	19.2	17.7		0	18.5
50	DFT-s	30	$\pi/2$ BPSK	1	1	18.6		0	19.2	17.7		0	18.5
				1	66	18.9		0	19.2	17.5		0	18.5
				1	131	18.7		0	19.2	17.6		0	18.5
				64	32	18.8		0	19.2	17.7		0	18.5
				1	1	18.8		0	19.2	17.6		0	18.5
			QPSK	1	66	18.6		0	19.2	17.6		0	18.5
				1	131	18.7		0	19.2	17.7		0	18.5
				64	32	18.7		0	19.2	17.7		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	66	18.9		0	19.2	17.7		0	18.5
40	DFT-s	30	$\pi/2$ BPSK	1	1	18.6		0	19.2	17.5		0	18.5
				1	52	18.7		0	19.2	17.6		0	18.5
				1	104	18.9		0	19.2	17.7		0	18.5
				50	25	18.8		0	19.2	17.6		0	18.5
				1	1	18.7		0	19.2	17.5		0	18.5
			QPSK	1	52	18.7		0	19.2	17.6		0	18.5
				1	104	18.6		0	19.2	17.6		0	18.5
				50	25	18.7		0	19.2	17.5		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	52	18.9		0	19.2	17.7		0	18.5
30	DFT-s	30	$\pi/2$ BPSK	1	1	18.6		0	19.2	17.5		0	18.5
				1	38	18.8		0	19.2	17.6		0	18.5
				1	76	18.6		0	19.2	17.6		0	18.5
				36	18	18.9		0	19.2	17.6		0	18.5
				1	1	18.9		0	19.2	17.7		0	18.5
			QPSK	1	38	18.9		0	19.2	17.5		0	18.5
				1	76	18.9		0	19.2	17.7		0	18.5
				36	18	18.8		0	19.2	17.6		0	18.5
				1	1	18.8		0	19.2	17.7		0	18.5
				1	38	18.9		0	19.2	17.7		0	18.5

NR Band 77 (Block C) Measured Results (ANT8) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647498	651748	656000	660248	664498	MFR	647498	651748	656000	660248	664498	MFR
						3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz		3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz	
25	DFT-s	30	π/2 BPSK	1	1	18.7	18.9	18.9	18.7	18.7	0	19.2	17.6	17.6	17.7	17.5	0
					32	18.6	18.7	18.6	18.7	18.9	0	19.2	17.7	17.6	17.7	17.5	0
					1	63	18.7	18.6	18.7	18.8	0	19.2	17.5	17.6	17.5	17.5	0
					32	16	18.8	18.8	18.6	18.7	0	19.2	17.6	17.5	17.6	17.5	0
					1	1	18.6	18.6	18.8	18.9	0	19.2	17.6	17.6	17.7	17.5	0
					32	16	18.8	18.7	18.7	18.9	0	19.2	17.6	17.7	17.6	17.7	0
			QPSK	1	63	18.8	18.6	18.6	18.8	18.8	0	19.2	17.7	17.6	17.7	17.7	0
					32	16	18.7	18.7	18.9	18.7	0	19.2	17.5	17.6	17.7	17.5	0
					1	1	18.7	18.9	18.6	18.9	0	19.2	17.6	17.6	17.7	17.5	0
					32	16	18.8	18.7	18.7	18.8	0	19.2	17.6	17.7	17.6	17.7	0
					1	25	18.7	18.6	18.6	18.8	0	19.2	17.6	17.6	17.6	17.6	0
					49	18.7	18.7	18.7	18.7	18.7	0	19.2	17.5	17.6	17.5	17.6	0
20	DFT-s	30	π/2 BPSK	1	1	18.7	18.9	18.6	18.6	18.9	0	19.2	17.6	17.5	17.6	17.6	0
					25	18.7	18.7	18.8	18.7	18.6	0	19.2	17.5	17.6	17.5	17.6	0
					1	49	18.6	18.8	18.7	18.8	0	19.2	17.7	17.6	17.7	17.6	0
					25	12	18.7	18.6	18.6	18.6	0	19.2	17.6	17.5	17.6	17.5	0
					1	1	18.9	18.8	18.6	18.7	0	19.2	17.6	17.6	17.6	17.5	0
					25	12	18.8	18.7	18.7	18.7	0	19.2	17.6	17.6	17.6	17.6	0
			QPSK	1	49	18.7	18.7	18.7	18.8	18.7	0	19.2	17.5	17.6	17.5	17.6	0
					25	12	18.8	18.7	18.7	18.7	0	19.2	17.6	17.6	17.6	17.6	0
					1	1	18.9	18.8	18.6	18.7	0	19.2	17.6	17.6	17.6	17.5	0
					25	12	18.8	18.7	18.7	18.7	0	19.2	17.6	17.6	17.6	17.6	0
					1	1	18.9	18.8	18.6	18.7	0	19.2	17.6	17.6	17.6	17.5	0
					25	12	18.8	18.7	18.7	18.7	0	19.2	17.6	17.6	17.6	17.6	0
15	DFT-s	30	π/2 BPSK	1	1	18.9	18.6	18.8	18.8	18.6	0	19.2	17.5	17.5	17.5	17.4	0
					1	18	18.9	18.8	18.6	18.6	0	19.2	17.6	17.5	17.4	17.5	0
					1	36	18.9	18.6	18.7	18.7	0	19.2	17.6	17.5	17.4	17.5	0
					18	9	18.8	18.9	18.8	18.7	0	19.2	17.6	17.6	17.5	17.5	0
					1	1	18.9	18.9	18.9	18.7	0	19.2	17.6	17.4	17.6	17.4	0
					1	18	18.8	18.7	18.7	18.8	0	19.2	17.5	17.6	17.4	17.4	0
			QPSK	1	36	18.6	18.7	18.6	18.9	18.8	0	19.2	17.4	17.5	17.6	17.5	0
					18	9	18.8	18.8	18.7	18.7	0	19.2	17.5	17.6	17.4	17.4	0
					1	1	18.9	18.9	18.9	18.7	0	19.2	17.6	17.4	17.6	17.4	0
					1	18	18.8	18.7	18.7	18.8	0	19.2	17.5	17.6	17.4	17.4	0
					1	36	18.6	18.7	18.6	18.9	0	19.2	17.4	17.5	17.6	17.5	0
					18	9	18.8	18.8	18.7	18.7	0	19.2	17.5	17.6	17.4	17.4	0
10	DFT-s	30	π/2 BPSK	1	1	18.6	18.8	18.6	18.6	18.6	0	19.2	17.5	17.6	17.4	17.4	0
					1	11	18.9	18.8	18.9	18.7	0	19.2	17.5	17.5	17.5	17.4	0
					1	22	18.8	18.8	18.7	18.7	0	19.2	17.6	17.4	17.4	17.5	0
					12	6	18.8	18.9	18.9	18.7	0	19.2	17.5	17.5	17.5	17.4	0
					1	1	18.7	18.8	18.9	18.8	0	19.2	17.5	17.4	17.5	17.6	0
					1	11	18.7	18.6	18.8	18.6	0	19.2	17.4	17.5	17.4	17.6	0
			QPSK	1	22	18.6	18.7	18.8	18.9	18.7	0	19.2	17.5	17.6	17.5	17.6	0
					12	6	18.8	18.7	18.9	18.8	0	19.2	17.6	17.4	17.6	17.5	0
					1	1	18.7	18.8	18.8	18.7	0	19.2	17.5	17.4	17.5	17.6	0
					1	11	18.7	18.6	18.8	18.6	0	19.2	17.4	17.5	17.4	17.6	0
					1	22	18.6	18.7	18.8	18.9	0	19.2	17.5	17.6	17.5	17.6	0
					12	6	18.8	18.7	18.9	18.8	0	19.2	17.6	17.4	17.6	17.5	0

NR Band 77 (Block A) Measured Results (ANT9)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	136	24.9		0	25.5	18.4		0	18.8
				1	271	24.7		0	25.5	18.2		0	18.8
				135	67	24.7		0	25.5	18.3		0	18.8
			QPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	136	24.8		0	25.5	18.2		0	18.8
				1	271	24.7		0	25.5	18.1		0	18.8
				135	67	24.7		0	25.5	18.1		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
90	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	122	24.6		0	25.5	18.2		0	18.8
				1	243	24.7		0	25.5	18.1		0	18.8
				121	60	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	122	24.7		0	25.5	18.2		0	18.8
				1	243	24.7		0	25.5	18.2		0	18.8
				121	60	24.7		0	25.5	18.2		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
80	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	108	24.6		0	25.5	18.2		0	18.8
				1	215	24.7		0	25.5	18.1		0	18.8
				108	54	24.7		0	25.5	18.1		0	18.8
			QPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	108	24.7		0	25.5	18.2		0	18.8
				1	215	24.7		0	25.5	18.2		0	18.8
				108	54	24.7		0	25.5	18.1		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
70	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	91	24.7		0	25.5	18.2		0	18.8
				1	187	24.7		0	25.5	18.2		0	18.8
				94	47	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.7		0	25.5	18.1		0	18.8
				1	91	24.7		0	25.5	18.1		0	18.8
				1	187	24.7		0	25.5	18.1		0	18.8
				94	47	24.6		0	25.5	18.2		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
60	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	80	24.7		0	25.5	18.2		0	18.8
				1	160	24.6		0	25.5	18.2		0	18.8
				81	40	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	80	24.8		0	25.5	18.2		0	18.8
				1	160	24.7		0	25.5	18.2		0	18.8
				81	40	24.7		0	25.5	18.2		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
50	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	66	24.7		0	25.5	18.1		0	18.8
				1	131	24.7		0	25.5	18.1		0	18.8
				64	32	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	66	24.6		0	25.5	18.2		0	18.8
				1	131	24.6		0	25.5	18.2		0	18.8
				64	32	24.6		0	25.5	18.1		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
40	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.2		0	18.8
				1	52	24.6		0	25.5	18.1		0	18.8
				1	104	24.7		0	25.5	18.2		0	18.8
				50	25	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.8		0	25.5	18.2		0	18.8
				1	52	24.6		0	25.5	18.2		0	18.8
				1	104	24.7		0	25.5	18.2		0	18.8
				50	25	24.6		0	25.5	18.1		0	18.8
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
30	DFT-s	30	$\pi/2$ BPSK	1	1	24.7		0	25.5	18.3		0	18.8
				1	38	24.6		0	25.5	18.2		0	18.8
				1	76	24.6		0	25.5	18.2		0	18.8
				36	18	24.7		0	25.5	18.2		0	18.8
			QPSK	1	1	24.8		0	25.5	18.2		0	18.8
				1	38	24.6		0	25.5	18.2		0	18.8
				1	76	24.7		0	25.5	18.2		0	18.8
				36	18	24.6		0	25.5	18.2		0	18.8

NR Band 77 (Block A) Measured Results (ANT9) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630832	633332	635832	MPR	Tune-up Limit	630832	633332	635832	MPR	Tune-up Limit
						3462.48 MHz	3499.98 MHz	3537.48 MHz			3462.48 MHz	3499.98 MHz	3537.48 MHz		
25	DFT-s	30	$\pi/2$ BPSK	1	1	24.6	24.7	24.7	0	25.5	18.1	18.0	18.2	0	18.8
				1	32	24.6	24.7	24.7	0	25.5	18.2	18.0	18.2	0	18.8
				1	63	24.7	24.7	24.7	0	25.5	18.2	18.2	18.2	0	18.8
				32	16	24.6	24.7	24.6	0	25.5	18.2	18.1	18.2	0	18.8
			QPSK	1	1	24.7	24.7	24.7	0	25.5	18.2	18.2	18.2	0	18.8
				1	32	24.7	24.6	24.6	0	25.5	18.2	18.2	18.2	0	18.8
				1	63	24.7	24.7	24.7	0	25.5	18.2	18.2	18.2	0	18.8
				32	16	24.7	24.6	24.6	0	25.5	18.2	18.1	18.1	0	18.8
20	DFT-s	30	$\pi/2$ BPSK	1	1	24.7	24.8	24.7	0	25.5	18.3	18.2	18.2	0	18.8
				1	25	24.7	24.7	24.6	0	25.5	18.2	18.1	18.2	0	18.8
				1	49	24.8	24.7	24.7	0	25.5	18.3	18.1	18.2	0	18.8
				25	12	24.7	24.8	24.6	0	25.5	18.2	18.1	18.2	0	18.8
			QPSK	1	1	24.7	24.7	24.7	0	25.5	18.2	18.2	18.3	0	18.8
				1	25	24.7	24.6	24.6	0	25.5	18.2	18.1	18.2	0	18.8
				1	49	24.8	24.7	24.7	0	25.5	18.3	18.2	18.3	0	18.8
				25	12	24.7	24.6	24.6	0	25.5	18.2	18.1	18.2	0	18.8
15	DFT-s	30	$\pi/2$ BPSK	1	1	24.7	24.7	24.7	0	25.5	18.3	18.2	18.2	0	18.8
				1	18	24.7	24.6	24.6	0	25.5	18.2	18.1	18.2	0	18.8
				1	36	24.8	24.7	24.7	0	25.5	18.3	18.1	18.2	0	18.8
				18	9	24.7	24.7	24.7	0	25.5	18.2	18.1	18.2	0	18.8
			QPSK	1	1	24.8	24.8	24.8	0	25.5	18.2	18.2	18.3	0	18.8
				1	18	24.7	24.7	24.7	0	25.5	18.2	18.1	18.2	0	18.8
				1	36	24.8	24.7	24.7	0	25.5	18.3	18.2	18.3	0	18.8
				18	9	24.7	24.7	24.7	0	25.5	18.2	18.1	18.2	0	18.8
10	DFT-s	30	$\pi/2$ BPSK	1	1	24.7	24.8	24.8	0	25.5	18.2	18.2	18.2	0	18.8
				1	11	24.7	24.8	24.7	0	25.5	18.3	18.1	18.1	0	18.8
				1	22	24.8	24.8	24.7	0	25.5	18.2	18.1	18.2	0	18.8
				12	6	24.7	24.7	24.7	0	25.5	18.2	18.2	18.1	0	18.8
			QPSK	1	1	24.8	24.7	24.7	0	25.5	18.2	18.2	18.2	0	18.8
				1	11	24.7	24.7	24.8	0	25.5	18.2	18.1	18.1	0	18.8
				1	22	24.8	24.8	24.8	0	25.5	18.3	18.2	18.2	0	18.8
				12	6	24.7	24.6	24.7	0	25.5	18.2	18.1	18.1	0	18.8

NR Band 77 (Block C) Measured Results (ANT9)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						656000	3840 MHz	MFR	Tune-up Limit	656000	3840 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5	18.2		0	18.8
				1	136	25.0		0	25.5	18.3		0	18.8
				1	271	24.8		0	25.5	18.1		0	18.8
				135	67	24.9		0	25.5	18.3		0	18.8
				1	1	24.9		0	25.5	18.1		0	18.8
			QPSK	1	136	25.0		0	25.5	18.0		0	18.8
				1	271	24.8		0	25.5	17.9		0	18.8
				135	67	24.9		0	25.5	18.3		0	18.8
				1	1	24.9		0	25.5	18.1		0	18.8
				1	1	24.9		0	25.5	18.1		0	18.8
90	DFT-s	30	$\pi/2$ BPSK	1	1	24.9		0	25.5	18.1		0	18.8
				1	122	24.9		0	25.5	18.0		0	18.8
				1	243	24.9		0	25.5	18.1		0	18.8
				121	60	24.9		0	25.5	18.0		0	18.8
				1	1	24.9		0	25.5	18.2		0	18.8
			QPSK	1	122	24.9		0	25.5	18.0		0	18.8
				1	243	25.0		0	25.5	18.1		0	18.8
				121	60	24.9		0	25.5	18.1		0	18.8
				1	1	24.9		0	25.5	18.1		0	18.8
				1	1	24.9		0	25.5	18.1		0	18.8
80	DFT-s	30	$\pi/2$ BPSK	1	1	24.8		0	25.5	18.1		0	18.8
				1	108	24.8		0	25.5	18.0		0	18.8
				1	215	24.8		0	25.5	18.1		0	18.8
				108	54	24.7		0	25.5	18.0		0	18.8
				1	1	24.8		0	25.5	18.2		0	18.8
			QPSK	1	108	24.8		0	25.5	18.0		0	18.8
				1	215	24.9		0	25.5	18.1		0	18.8
				108	54	24.7		0	25.5	18.0		0	18.8
				1	1	24.8		0	25.5	18.1		0	18.8
				1	1	24.8		0	25.5	18.1		0	18.8
70	DFT-s	30	$\pi/2$ BPSK	1	1	24.8		0	25.5	18.1		0	18.8
				1	91	24.8		0	25.5	18.0		0	18.8
				1	187	24.7		0	25.5	18.1		0	18.8
				94	47	24.8		0	25.5	18.0		0	18.8
				1	1	24.8		0	25.5	18.0		0	18.8
			QPSK	1	91	24.7		0	25.5	18.1		0	18.8
				1	187	24.7		0	25.5	18.0		0	18.8
				94	47	24.8		0	25.5	18.0		0	18.8
				1	1	24.8		0	25.5	18.1		0	18.8
				1	1	24.8		0	25.5	18.1		0	18.8
60	DFT-s	30	$\pi/2$ BPSK	1	1	24.6		0	25.5	18.1		0	18.8
				1	80	24.7		0	25.5	18.0		0	18.8
				1	160	24.6		0	25.5	18.0		0	18.8
				81	40	24.7		0	25.5	18.0		0	18.8
				1	1	24.7		0	25.5	18.1		0	18.8
			QPSK	1	80	24.6		0	25.5	18.1		0	18.8
				1	160	24.7		0	25.5	18.1		0	18.8
				81	40	24.7		0	25.5	18.1		0	18.8
				1	1	24.7		0	25.5	18.1		0	18.8
				1	1	24.7		0	25.5	18.1		0	18.8
50	DFT-s	30	$\pi/2$ BPSK	1	1	25.0		0	25.5	18.0		0	18.8
				1	66	24.9		0	25.5	18.0		0	18.8
				1	131	25.0		0	25.5	18.1		0	18.8
				64	32	24.9		0	25.5	17.9		0	18.8
				1	1	25.0		0	25.5	18.0		0	18.8
			QPSK	1	66	25.0		0	25.5	17.9		0	18.8
				1	131	24.9		0	25.5	18.1		0	18.8
				64	32	24.9		0	25.5	18.0		0	18.8
				1	1	25.0		0	25.5	18.1		0	18.8
				1	1	25.0		0	25.5	18.1		0	18.8
40	DFT-s	30	$\pi/2$ BPSK	1	1	24.9		0	25.5	17.9		0	18.8
				1	52	24.9		0	25.5	18.0		0	18.8
				1	104	25.0		0	25.5	18.1		0	18.8
				50	25	25.0		0	25.5	18.0		0	18.8
				1	1	24.9		0	25.5	17.9		0	18.8
			QPSK	1	52	24.9		0	25.5	18.0		0	18.8
				1	104	25.0		0	25.5	18.0		0	18.8
				50	25	25.0		0	25.5	17.9		0	18.8
				1	1	24.9		0	25.5	18.0		0	18.8
				1	1	24.9		0	25.5	18.0		0	18.8
30	DFT-s	30	$\pi/2$ BPSK	1	1	24.9		0	25.5	18.0		0	18.8
				1	38	24.9		0	25.5	18.1		0	18.8
				1	76	24.9		0	25.5	18.1		0	18.8
				36	18	24.9		0	25.5	17.9		0	18.8
				1	1	24.9		0	25.5	18.0		0	18.8
			QPSK	1	38	25.0		0	25.5	17.9		0	18.8
				1	76	24.9		0	25.5	18.0		0	18.8
				36	18	24.9		0	25.5	17.9		0	18.8
				1	1	24.9		0	25.5	18.0		0	18.8
				1	1	24.9		0	25.5	18.0		0	18.8

NR Band 77 (Block C) Measured Results (ANT9) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647498	651748	656000	660248	664498	MFR	647498	651748	656000	660248	664498	MFR
						3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz		3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz	
25	DFT-s	30	π/2 BPSK	1	1	24.9	24.8	25.0	24.8	25.0	0	25.5	18.0	18.0	18.0	17.9	0
					32	24.9	24.8	24.9	24.9	24.8	0	25.5	17.9	18.0	18.0	17.9	0
					1	63	24.8	25.0	24.8	24.8	0	25.5	18.0	18.1	18.1	17.9	0
					32	16	24.8	24.8	25.0	25.0	0	25.5	18.0	18.0	17.9	18.0	0
					1	1	24.9	25.0	24.9	25.0	0	25.5	18.0	17.9	17.9	18.1	0
					32	16	24.9	25.0	24.9	25.0	0	25.5	18.0	17.9	18.1	18.1	0
			QPSK	1	63	25.0	25.0	25.0	24.9	24.9	0	25.5	18.1	17.9	18.1	17.9	0
					32	16	24.9	24.9	24.9	24.9	0	25.5	17.9	18.0	18.0	18.0	0
					1	1	25.0	25.0	24.9	25.0	0	25.5	18.0	17.9	18.1	18.1	0
					32	16	24.9	24.9	24.9	24.9	0	25.5	18.1	17.9	18.1	18.1	0
					1	1	25.0	25.0	24.9	25.0	0	25.5	18.0	17.9	18.1	18.1	0
					32	16	24.9	24.9	24.9	24.9	0	25.5	18.1	17.9	18.1	18.1	0
20	DFT-s	30	π/2 BPSK	1	1	25.0	25.0	24.9	24.9	24.9	0	25.5	17.9	18.0	18.0	17.9	0
					25	24.9	24.9	24.9	24.9	24.9	0	25.5	17.9	18.1	18.0	17.9	0
					1	49	24.9	24.9	25.0	25.0	0	25.5	17.9	18.1	18.0	17.9	0
					25	12	24.9	25.0	25.0	24.9	0	25.5	18.0	17.9	17.9	17.9	0
					1	1	25.0	25.0	24.9	25.0	0	25.5	18.0	17.9	17.9	17.9	0
					25	12	24.9	24.9	25.0	24.9	0	25.5	18.0	17.9	17.9	18.0	0
			QPSK	1	49	25.0	25.0	24.9	25.0	25.0	0	25.5	18.0	17.9	18.0	17.9	0
					25	12	25.0	25.0	24.9	25.0	0	25.5	18.1	17.9	18.0	17.9	0
					1	1	25.0	25.0	24.9	25.0	0	25.5	18.0	17.9	18.0	17.9	0
					25	12	25.0	25.0	24.9	25.0	0	25.5	18.1	17.9	18.0	17.9	0
					1	1	25.0	25.0	24.9	25.0	0	25.5	18.0	17.9	18.0	17.9	0
					25	12	25.0	25.0	24.9	25.0	0	25.5	18.1	17.9	18.0	17.9	0
15	DFT-s	30	π/2 BPSK	1	1	25.0	25.0	24.9	25.0	25.0	0	25.5	18.0	17.9	18.0	17.9	0
					1	18	25.0	24.9	24.9	25.0	0	25.5	17.9	17.9	18.1	18.1	0
					1	36	24.9	24.9	25.0	25.0	0	25.5	18.0	18.1	18.1	18.0	0
					18	9	24.9	24.9	25.0	24.9	0	25.5	18.0	18.1	18.0	18.1	0
					1	1	24.9	24.9	24.9	25.0	0	25.5	18.0	18.1	18.0	18.0	0
					1	18	24.9	24.9	24.9	25.0	0	25.5	17.9	18.0	17.9	18.0	0
			QPSK	1	36	25.0	24.9	24.9	24.9	24.9	0	25.5	18.0	17.9	18.0	18.1	0
					18	9	24.9	25.0	24.9	25.0	0	25.5	17.9	18.0	18.0	17.9	0
					1	1	24.9	24.9	24.9	25.0	0	25.5	18.0	18.1	18.0	18.0	0
					1	18	24.9	24.9	24.9	25.0	0	25.5	17.9	18.0	17.9	18.0	0
					1	36	25.0	24.9	24.9	24.9	0	25.5	18.0	17.9	18.0	18.1	0
					18	9	24.9	25.0	24.9	25.0	0	25.5	17.9	18.0	18.0	17.9	0
10	DFT-s	30	π/2 BPSK	1	1	25.0	24.9	24.9	25.0	24.9	0	25.5	18.0	18.0	18.0	17.9	0
					1	11	24.9	25.0	24.9	25.0	0	25.5	17.9	18.0	17.9	18.0	0
					1	22	25.0	24.9	24.9	25.0	0	25.5	17.9	18.0	18.0	18.0	0
					12	6	24.9	24.9	25.0	24.9	0	25.5	17.9	18.0	18.1	18.0	0
					1	1	24.9	24.9	25.0	25.0	0	25.5	18.0	17.9	18.0	17.9	0
					1	11	24.9	25.0	24.9	25.0	0	25.5	18.1	17.9	18.0	18.1	0
			QPSK	1	22	24.9	25.0	25.0	24.9	24.9	0	25.5	17.9	17.9	17.9	18.0	0
					12	6	24.9	24.9	25.0	24.9	0	25.5	18.0	18.0	18.1	18.0	0
					1	1	24.9	24.9	25.0	25.0	0	25.5	18.0	18.0	18.0	18.0	0
					1	11	24.9	25.0	24.9	25.0	0	25.5	18.1	17.9	18.0	18.1	0
					1	22	24.9	25.0	25.0	24.9	0	25.5	17.9	17.9	17.9	18.0	0
					12	6	24.9	24.9	25.0	24.9	0	25.5	18.0	18.0	18.1	18.0	0

NR Band 77 (Block A) Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						633332	3499.98 MHz	MPR	Tune-up Limit	633332	3499.98 MHz	MPR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	17.4		0	18.1	17.8		0	18.7
				1	136	17.5		0	18.1	18.0		0	18.7
				1	271	17.3		0	18.1	17.7		0	18.7
				135	67	17.5		0	18.1	18.0		0	18.7
			QPSK	1	1	17.5		0	18.1	17.9		0	18.7
				1	136	17.4		0	18.1	17.8		0	18.7
				1	271	17.3		0	18.1	17.7		0	18.7
				135	67	17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7
90	DFT-s	30	$\pi/2$ BPSK	1	1	17.4		0	18.1	17.8		0	18.7
				1	122	17.4		0	18.1	17.9		0	18.7
				1	243	17.4		0	18.1	17.8		0	18.7
				121	60	17.4		0	18.1	17.9		0	18.7
			QPSK	1	1	17.3		0	18.1	17.8		0	18.7
				1	122	17.3		0	18.1	17.8		0	18.7
				1	243	17.3		0	18.1	17.8		0	18.7
				121	60	17.3		0	18.1	17.8		0	18.7
						17.3		0	18.1	17.8		0	18.7
						17.3		0	18.1	17.8		0	18.7
80	DFT-s	30	$\pi/2$ BPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	108	17.3		0	18.1	17.8		0	18.7
				1	215	17.3		0	18.1	17.7		0	18.7
				108	54	17.4		0	18.1	17.9		0	18.7
			QPSK	1	1	17.4		0	18.1	17.8		0	18.7
				1	108	17.4		0	18.1	17.9		0	18.7
				1	215	17.3		0	18.1	17.8		0	18.7
				108	54	17.4		0	18.1	17.9		0	18.7
						17.4		0	18.1	17.9		0	18.7
						17.4		0	18.1	17.9		0	18.7
70	DFT-s	30	$\pi/2$ BPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	91	17.4		0	18.1	17.9		0	18.7
				1	187	17.4		0	18.1	17.9		0	18.7
				94	47	17.3		0	18.1	17.7		0	18.7
			QPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	91	17.4		0	18.1	17.8		0	18.7
				1	187	17.4		0	18.1	17.8		0	18.7
				94	47	17.4		0	18.1	17.8		0	18.7
						17.4		0	18.1	17.8		0	18.7
						17.4		0	18.1	17.8		0	18.7
60	DFT-s	30	$\pi/2$ BPSK	1	1	17.4		0	18.1	17.8		0	18.7
				1	80	17.4		0	18.1	17.9		0	18.7
				1	160	17.4		0	18.1	17.9		0	18.7
				81	40	17.3		0	18.1	17.8		0	18.7
			QPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	80	17.3		0	18.1	17.8		0	18.7
				1	160	17.3		0	18.1	17.7		0	18.7
				81	40	17.3		0	18.1	17.8		0	18.7
						17.3		0	18.1	17.8		0	18.7
						17.3		0	18.1	17.8		0	18.7
50	DFT-s	30	$\pi/2$ BPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	66	17.3		0	18.1	17.7		0	18.7
				1	131	17.3		0	18.1	17.7		0	18.7
				64	32	17.4		0	18.1	17.9		0	18.7
			QPSK	1	1	17.3		0	18.1	17.7		0	18.7
				1	66	17.4		0	18.1	17.8		0	18.7
				1	131	17.3		0	18.1	17.7		0	18.7
				64	32	17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7
40	DFT-s	30	$\pi/2$ BPSK	1	1	17.3		0	18.1	17.8		0	18.7
				1	52	17.3		0	18.1	17.8		0	18.7
				1	104	17.4		0	18.1	17.9		0	18.7
				50	25	17.4		0	18.1	17.8		0	18.7
			QPSK	1	1	17.3		0	18.1	17.8		0	18.7
				1	52	17.3		0	18.1	17.7		0	18.7
				1	104	17.4		0	18.1	17.9		0	18.7
				50	25	17.4		0	18.1	17.9		0	18.7
						17.4		0	18.1	17.9		0	18.7
						17.4		0	18.1	17.9		0	18.7
30	DFT-s	30	$\pi/2$ BPSK	1	1	17.3		0	18.1	17.8		0	18.7
				1	38	17.4		0	18.1	17.9		0	18.7
				1	76	17.3		0	18.1	17.8		0	18.7
				36	18	17.4		0	18.1	17.8		0	18.7
			QPSK	1	1	17.4		0	18.1	17.8		0	18.7
				1	38	17.3		0	18.1	17.8		0	18.7
				1	76	17.3		0	18.1	17.7		0	18.7
				36	18	17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7
						17.3		0	18.1	17.7		0	18.7

NR Band 77 (Block A) Measured Results (ANT4) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630832	633332	635832	MPR	Tune-up Limit	630832	633332	635832	MPR	Tune-up Limit
						3462.48 MHz	3499.98 MHz	3537.48 MHz			3462.48 MHz	3499.98 MHz	3537.48 MHz		
25	DFT-s	30	$\pi/2$ BPSK	1	1	17.4	17.4	17.3	0	18.1	17.9	17.9	17.8	0	18.7
				1	32	17.4	17.3	17.3	0	18.1	17.9	17.7	17.7	0	18.7
				1	63	17.4	17.3	17.4	0	18.1	17.9	17.8	17.9	0	18.7
				32	16	17.4	17.3	17.3	0	18.1	17.9	17.8	17.7	0	18.7
			QPSK	1	1	17.4	17.3	17.3	0	18.1	17.8	17.8	17.7	0	18.7
				1	32	17.3	17.3	17.3	0	18.1	17.7	17.7	17.8	0	18.7
				1	63	17.4	17.4	17.4	0	18.1	17.9	17.9	17.8	0	18.7
				32	16	17.3	17.3	17.3	0	18.1	17.7	17.7	17.8	0	18.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630666	633332	635998	MPR	Tune-up Limit	630666	633332	635998	MPR	Tune-up Limit
						3459.99 MHz	3499.98 MHz	3539.97 MHz			3459.99 MHz	3499.98 MHz	3539.97 MHz		
20	DFT-s	30	$\pi/2$ BPSK	1	1	17.4	17.4	17.3	0	18.1	17.8	17.9	17.8	0	18.7
				1	25	17.4	17.3	17.3	0	18.1	17.8	17.7	17.8	0	18.7
				1	49	17.4	17.4	17.3	0	18.1	17.9	17.9	17.7	0	18.7
				25	12	17.3	17.4	17.3	0	18.1	17.8	17.9	17.7	0	18.7
			QPSK	1	1	17.3	17.4	17.3	0	18.1	17.8	17.8	17.8	0	18.7
				1	25	17.3	17.3	17.3	0	18.1	17.8	17.8	17.8	0	18.7
				1	49	17.4	17.3	17.3	0	18.1	17.8	17.8	17.7	0	18.7
				25	12	17.3	17.3	17.4	0	18.1	17.7	17.8	17.8	0	18.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630500	633332	636166	MPR	Tune-up Limit	630500	633332	636166	MPR	Tune-up Limit
						3457.5 MHz	3499.98 MHz	3542.49 MHz			3457.5 MHz	3499.98 MHz	3542.49 MHz		
15	DFT-s	30	$\pi/2$ BPSK	1	1	17.4	17.4	17.3	0	18.1	17.9	17.8	17.8	0	18.7
				1	18	17.3	17.3	17.4	0	18.1	17.8	17.7	17.8	0	18.7
				1	36	17.3	17.3	17.3	0	18.1	17.8	17.7	17.7	0	18.7
				18	9	17.3	17.4	17.4	0	18.1	17.8	17.8	17.8	0	18.7
			QPSK	1	1	17.3	17.4	17.4	0	18.1	17.7	17.9	17.9	0	18.7
				1	18	17.3	17.4	17.4	0	18.1	17.7	17.9	17.9	0	18.7
				1	36	17.3	17.4	17.3	0	18.1	17.8	17.9	17.8	0	18.7
				18	9	17.4	17.3	17.3	0	18.1	17.9	17.8	17.8	0	18.7
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)					Power Mode B (dBm)				
						630332	633332	636332	MPR	Tune-up Limit	630332	633332	636332	MPR	Tune-up Limit
						3454.98 MHz	3499.98 MHz	3544.98 MHz			3454.98 MHz	3499.98 MHz	3544.98 MHz		
10	DFT-s	30	$\pi/2$ BPSK	1	1	17.4	17.3	17.3	0	18.1	17.8	17.8	17.8	0	18.7
				1	11	17.3	17.3	17.3	0	18.1	17.7	17.8	17.7	0	18.7
				1	22	17.3	17.3	17.3	0	18.1	17.7	17.8	17.7	0	18.7
				12	6	17.3	17.3	17.3	0	18.1	17.8	17.8	17.8	0	18.7
			QPSK	1	1	17.3	17.4	17.3	0	18.1	17.7	17.8	17.8	0	18.7
				1	11	17.3	17.4	17.4	0	18.1	17.8	17.9	17.8	0	18.7
				1	22	17.4	17.4	17.3	0	18.1	17.9	17.9	17.7	0	18.7
				12	6	17.4	17.3	17.4	0	18.1	17.8	17.8	17.9	0	18.7

NR Band 77 (Block C) Measured Results (ANT4)

BW (MHz)	OFDM Modulation Scheme	SCS (KHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)				Power Mode B (dBm)			
						656000	3840 MHz	MFR	Tune-up Limit	656000	3840 MHz	MFR	Tune-up Limit
100	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.6		0	18.7
				1	136	17.2		0	18.1	17.7		0	18.7
				1	271	17.1		0	18.1	17.7		0	18.7
				135	67	17.2		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
			QPSK	1	136	17.2		0	18.1	17.6		0	18.7
				1	271	17.1		0	18.1	17.7		0	18.7
				135	67	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
90	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.7		0	18.7
				1	122	17.0		0	18.1	17.7		0	18.7
				1	243	17.1		0	18.1	17.6		0	18.7
				121	60	17.0		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.6		0	18.7
			QPSK	1	122	17.0		0	18.1	17.7		0	18.7
				1	243	17.1		0	18.1	17.6		0	18.7
				121	60	17.1		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
80	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.6		0	18.7
				1	108	17.0		0	18.1	17.7		0	18.7
				1	215	17.1		0	18.1	17.6		0	18.7
				108	54	17.0		0	18.1	17.6		0	18.7
				1	1	17.0		0	18.1	17.6		0	18.7
			QPSK	1	108	17.0		0	18.1	17.7		0	18.7
				1	215	17.0		0	18.1	17.7		0	18.7
				108	54	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
70	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.6		0	18.7
				1	91	17.0		0	18.1	17.7		0	18.7
				1	187	17.0		0	18.1	17.6		0	18.7
				94	47	17.1		0	18.1	17.6		0	18.7
				1	1	17.0		0	18.1	17.6		0	18.7
			QPSK	1	91	17.1		0	18.1	17.6		0	18.7
				1	187	17.0		0	18.1	17.6		0	18.7
				94	47	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
60	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.7		0	18.7
				1	80	17.0		0	18.1	17.6		0	18.7
				1	160	17.0		0	18.1	17.7		0	18.7
				81	40	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
			QPSK	1	80	17.0		0	18.1	17.6		0	18.7
				1	160	17.0		0	18.1	17.6		0	18.7
				81	40	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
50	DFT-s	30	$\pi/2$ BPSK	1	1	17.0		0	18.1	17.7		0	18.7
				1	66	17.1		0	18.1	17.6		0	18.7
				1	131	17.0		0	18.1	17.7		0	18.7
				64	32	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.6		0	18.7
			QPSK	1	66	17.1		0	18.1	17.7		0	18.7
				1	131	17.1		0	18.1	17.7		0	18.7
				64	32	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
				1	1	17.0		0	18.1	17.7		0	18.7
40	DFT-s	30	$\pi/2$ BPSK	1	1	17.1		0	18.1	17.7		0	18.7
				1	52	17.0		0	18.1	17.6		0	18.7
				1	104	17.1		0	18.1	17.6		0	18.7
				50	25	17.0		0	18.1	17.6		0	18.7
				1	1	17.0		0	18.1	17.6		0	18.7
			QPSK	1	52	17.1		0	18.1	17.6		0	18.7
				1	104	17.1		0	18.1	17.6		0	18.7
				50	25	17.0		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.6		0	18.7
30	DFT-s	30	$\pi/2$ BPSK	1	1	17.1		0	18.1	17.7		0	18.7
				1	38	17.1		0	18.1	17.6		0	18.7
				1	76	17.1		0	18.1	17.7		0	18.7
				36	18	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
			QPSK	1	38	17.1		0	18.1	17.7		0	18.7
				1	76	17.0		0	18.1	17.6		0	18.7
				36	18	17.1		0	18.1	17.6		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7
				1	1	17.1		0	18.1	17.7		0	18.7

NR Band 77 (Block C) Measured Results (ANT4) (continued)

BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647498	651748	656000	660248	664498	MFR	647498	651748	656000	660248	664498	Tune-up Limit
						3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz		3712.47 MHz	3776.22 MHz	3840 MHz	3903.72 MHz	3967.47 MHz	
25	DFT-s	30	$\pi/2$ BPSK	1	1	17.1	17.0	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					32	17.0	17.1	17.1	17.0	17.0	0	18.1	17.7	17.6	17.6	17.6	0
					63	17.0	17.1	17.1	17.1	17.0	0	18.1	17.6	17.6	17.6	17.6	0
				QPSK	32	16	17.1	17.1	17.0	17.1	0	18.1	17.6	17.7	17.6	17.7	0
					1	1	17.1	17.1	17.0	17.0	0	18.1	17.7	17.7	17.7	17.6	0
					32	17.0	17.1	17.1	17.0	17.0	0	18.1	17.6	17.7	17.6	17.6	0
			QPSK	1	63	17.0	17.1	17.1	17.1	17.0	0	18.1	17.7	17.6	17.7	17.6	0
					32	16	17.0	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					32	16	17.0	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					32	16	17.0	17.1	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647332	651666	656000	660332	664666	MFR	647332	651666	656000	660332	664666	Tune-up Limit
						3709.98 MHz	3774.99 MHz	3840 MHz	3904.98 MHz	3969.99 MHz		3709.98 MHz	3774.99 MHz	3840 MHz	3904.98 MHz	3969.99 MHz	
20	DFT-s	30	$\pi/2$ BPSK	1	1	17.1	17.1	17.0	17.1	17.0	0	18.1	17.6	17.6	17.7	17.6	0
					25	17.0	17.0	17.0	17.1	17.1	0	18.1	17.6	17.6	17.7	17.6	0
					49	17.0	17.0	17.1	17.1	17.1	0	18.1	17.6	17.7	17.7	17.6	0
				QPSK	25	12	17.0	17.0	17.0	17.1	0	18.1	17.6	17.7	17.6	17.6	0
					1	1	17.1	17.1	17.0	17.1	0	18.1	17.6	17.7	17.7	17.6	0
					25	12	17.1	17.0	17.1	17.1	0	18.1	17.6	17.7	17.7	17.6	0
			QPSK	1	49	17.0	17.0	17.1	17.1	17.0	0	18.1	17.7	17.7	17.7	17.6	0
					25	12	17.0	17.0	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.1	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					25	12	17.0	17.0	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.1	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					25	12	17.0	17.0	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						647166	651582	656000	660416	664832	MFR	647166	651582	656000	660416	664832	Tune-up Limit
						3707.49 MHz	3773.73 MHz	3840 MHz	3906.24 MHz	3972.48 MHz		3707.49 MHz	3773.73 MHz	3840 MHz	3906.24 MHz	3972.48 MHz	
15	DFT-s	30	$\pi/2$ BPSK	1	1	17.0	17.1	17.1	17.1	17.0	0	18.1	17.7	17.6	17.6	17.7	0
					18	17.0	17.1	17.0	17.0	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					36	17.0	17.0	17.0	17.1	17.1	0	18.1	17.6	17.6	17.7	17.6	0
			QPSK	1	18	9	17.0	17.0	17.0	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.0	17.0	17.1	0	18.1	17.6	17.6	17.7	17.6	0
					18	9	17.0	17.0	17.1	17.1	0	18.1	17.6	17.6	17.7	17.6	0
			QPSK	1	36	17.1	17.1	17.1	17.1	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					18	9	17.1	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					36	17.1	17.1	17.1	17.1	17.0	0	18.1	17.7	17.7	17.6	17.6	0
					18	9	17.1	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0
BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Power Mode A (dBm)						Power Mode B (dBm)					
						646998	651498	656000	660498	664998	MFR	646998	651498	656000	660498	664998	Tune-up Limit
						3704.97 MHz	3772.47 MHz	3840 MHz	3907.47 MHz	3974.97 MHz		3704.97 MHz	3772.47 MHz	3840 MHz	3907.47 MHz	3974.97 MHz	
10	DFT-s	30	$\pi/2$ BPSK	1	1	17.0	17.1	17.0	17.1	17.1	0	18.1	17.6	17.7	17.6	17.6	0
					11	17.1	17.0	17.1	17.1	17.0	0	18.1	17.7	17.6	17.7	17.6	0
					22	17.1	17.1	17.0	17.1	17.0	0	18.1	17.7	17.6	17.7	17.7	0
			QPSK	1	6	17.1	17.0	17.0	17.1	17.1	0	18.1	17.7	17.6	17.6	17.7	0
					1	1	17.0	17.0	17.0	17.1	0	18.1	17.6	17.6	17.7	17.7	0
					11	17.1	17.0	17.1	17.1	17.0	0	18.1	17.7	17.7	17.6	17.6	0
			QPSK	1	22	17.0	17.0	17.1	17.1	17.0	0	18.1	17.7	17.6	17.7	17.7	0
					6	17.1	17.0	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					1	1	17.1	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0
					22	17.0	17.0	17.1	17.1	17.0	0	18.1	17.7	17.6	17.7	17.7	0
					6	17.1	17.0	17.0	17.1	17.1	0	18.1	17.7	17.7	17.6	17.6	0

9.7. Wi-Fi 2.4GHz (DTS Band)

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 b/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 mode (i.e. g, n, ac, then ax) is selected. Therefore the SAR measurements performed for the 802.11b modes, as the lowest order modulation, cover 802.11g/n/ac/ax modes.

Inspection of the SAR plots has shown that there is no overlap of hotspots and the center of antennas is over 100 mm apart. Using the guidance in KDB 248227 section 6.1, no evaluation of MIMO is required and SAR compliance for simultaneous transmission is determined separately for each individual antenna.

Tune-up Output Power for Wi-Fi 2.4 GHz

The table below is the Maximum power for this device. The highlighted values indicates what the overall worst case transmission mode will be required for SAR testing per channel. In the Wi-Fi 2.4 GHz(P_{Cell_OFF} and P_{Cell_ON}) table, the highlighted worst case Low/Mid/High channels are selected for Mode A and Mode B.

Channel	Frequency (MHz)	Tune-up Output Power (dBm)																									
		ANT3 / ANT4																									
		SISO												MIMO													
b (SISO)	g (SISO) Low Rate	g (SISO) Mid Rate	g (SISO) High Rate	11n/11ac HT20 (SISO) Low Rate	11n/11ac HT20 (SISO) Mid Rate	11n/11ac HT20 (SISO) High Rate	11ax HE20 (SISO) Low Rate	11ax HE20 (SISO) Mid Rate	11ax HE20 (SISO) High Rate	11ax HE20 RU242 (SISO)	11ax HE20 RU106 (SISO)	11ax HE20 RU52 (SISO)	11ax HE20 RU26 (SISO)	11n/11ac HT20 (2Tx, nonTxBF) Low Rate	11n/11ac HT20 (2Tx, nonTxBF) Mid Rate	11n/11ac HT20 (2Tx, nonTxBF) High Rate	11ax HE20 (2Tx, nonTxBF) Low Rate	11ax HE20 (2Tx, nonTxBF) Mid Rate	11ax HE20 (2Tx, nonTxBF) High Rate	11ax HE20 RU242 (2Tx, nonTxBF)	11ax HE20 RU106 (2Tx, nonTxBF)	11ax HE20 RU52 (2Tx, nonTxBF)	11ax HE20 RU26 (2Tx, nonTxBF)				
1	2412	20.5	18.0	17.8	17.5	18.0	17.8	17.5	17.0	16.5	16.0	16.0	15.0	12.0	17.5	17.0	16.5	16.0	15.5	15.0	15.0	15.0	15.0	12.0			
2	2417	21.5	19.5	19.5	19.5	19.5	19.5	18.0	18.0	18.0	18.0	18.0	15.0	12.0	18.5	18.5	18.5	17.0	17.0	17.0	17.0	17.0	15.0	12.0			
3	2422	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	20.0	20.0	20.0	19.0	19.0	19.0	19.0	18.0	15.0	12.0			
4	2427	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0			
5	2432	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0			
6	2437	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0			
7	2442	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0			
8	2447	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0	21.5	21.5	21.5	21.5	21.5	21.5	21.5	18.0	15.0	12.0			
9	2452	21.5	21.0	21.0	21.0	21.0	21.0	21.5	21.5	21.5	21.5	18.0	15.0	12.0	19.5	19.5	19.5	18.5	18.5	18.5	18.5	18.0	15.0	12.0			
10	2457	21.5	19.5	19.5	19.5	19.5	19.5	18.0	18.0	18.0	18.0	18.0	15.0	12.0	18.5	18.5	18.5	17.0	17.0	17.0	17.0	15.0	12.0				
11	2462	21.5	18.5	18.0	17.5	18.5	18.0	17.5	17.0	16.5	16.0	16.0	15.0	12.0	17.5	17.0	16.5	16.0	15.5	15.0	15.0	15.0	15.0	12.0			
12	2467	20.5	16.0	15.8	15.5	16.0	15.8	15.5	15.0	14.5	14.0	14.0	14.0	12.0	15.0	14.5	14.0	14.0	13.5	13.0	13.0	13.0	13.0	12.0			
13	2472	18.0	14.5	14.3	14.0	14.5	14.3	14.0	10.0	9.8	9.5	9.5	4.0	0.0	14.3	14.0	13.8	9.0	8.8	8.5	8.5	3.5	0.0	0.0			

Wi-Fi 2.4 GHz(P_{Cell_OFF} and P_{Cell_ON})

For 2.4 GHz band, there are three use cases:

- P_{Cell_OFF} : This will be used when only Wi-Fi radio is ON and WWAN (Sub-6 GHz) is OFF.
- P_{Cell_ON} : This will be used when Wi-Fi radio and Sub 6GHz are ON and 5G FR2 is OFF.
- P_{Cell_ON} (5G FR2 ON): This will be used when the Wi-Fi radio and only 5G FR2 are ON.³

Mode	Channel	Frequency (MHz)	Tune-up Output Power (dBm)				Tune-up Output Power (dBm)				Tune-up Output Power (dBm)			
			P_{Cell_OFF}		P_{Cell_ON}		P_{Cell_ON}		P_{Cell_ON}		P_{Cell_ON} (5G FR2 ON)		P_{Cell_ON} (5G FR2 ON)	
			ANT3		ANT4		ANT3		ANT4		ANT3		ANT4	
			Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B
802.11b DSSS (SISO)	1	2412	20.50	18.25	19.75	20.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	2	2417	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	3	2422	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	4	2427	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	5	2432	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	6	2437	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	7	2442	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	8	2447	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	9	2452	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	10	2457	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	11	2462	21.50	18.25	19.75	21.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	12	2467	20.50	18.25	19.75	20.50	19.50	15.00	15.00	18.25	19.50	14.25	15.00	17.75
	13	2472	18.00	18.00	18.00	18.00	18.00	15.00	15.00	18.00	18.00	14.25	15.00	17.75

3 Refer to the accompanied Part 1 report for TER analysis. The SAR report will not include this power state for its Simultaneous Transmission scenario.

Wi-Fi 2.4GHz Measured Results

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n/ac/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Power Mode	Antenna	Mode	Power Mode A				SAR Test (Yes/No)	Power Mode B				SAR Test (Yes/No)
			Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)		Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	
P _{Cell, OFF}	ANT3	DSSS 802.11b	2	2417	20.02	21.50	Yes	1	2412	16.55	18.25	Yes
			6	2437	20.05	21.50		6	2437	16.61	18.25	
			11	2462	19.95	21.50		11	2462	16.52	18.25	
	ANT4	DSSS 802.11b	1	2412	18.01	19.75	Yes	2	2417	20.01	21.50	Yes
			6	2437	18.28	19.75		6	2437	20.03	21.50	
			11	2462	17.86	19.75		11	2462	20.02	21.50	
Power Mode	Antenna	Mode	Power Mode A				SAR Test (Yes/No)	Power Mode B				SAR Test (Yes/No)
			Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)		Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	
P _{Cell, ON}	ANT3	DSSS 802.11b	1	2412	18.22	19.50	Yes	1	2412	13.65	15.00	Yes
			6	2437	18.38	19.50		6	2437	13.78	15.00	
			11	2462	18.17	19.50		11	2462	13.73	15.00	
	ANT4	DSSS 802.11b	1	2412	13.20	15.00	Yes	1	2412	16.60	18.25	Yes
			6	2437	13.44	15.00		6	2437	16.93	18.25	
			11	2462	13.29	15.00		11	2462	16.61	18.25	

Note(s):

1. SAR is not required for channel 12 and 13 because the tune-up limit and the measured output power for these two channels are not greater than those for the default test channels. Refer to KDB 248227 D01 section 3.1.
2. P_{Cell ON} (5G FR2 ON) and P_{Cell ON} share the same measured power. Power for both power modes were measured using the same setting. With power being within 2 dB of both tune-up limits, P_{Cell ON} will experience greater scaling, thus representing a more conservative value.

9.8. Wi-Fi 5GHz (U-NII Bands)

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/n/ac/ax modes, the channel with the largest channel bandwidth, lowest order modulation (i.e., a, n, ac, then ax), lowest data rate was selected for testing. Therefore the SAR measurements performed for the 802.11n/ac modes, as the lowest order modulation, cover 802.11ax modes.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

Inspection of the SAR plots has shown that there is no overlap of hotspots and the center of antennas is over 100 mm apart. Using the guidance in KDB 248227 section 6.1, no evaluation of MIMO is required and SAR compliance for simultaneous transmission is determined separately for each individual antenna.

Tune-up Output Power for Wi-Fi 5 GHz

The table below is the Maximum power for this device. The highlighted values indicates what the overall worst case transmission mode will be required for SAR testing per channel. In the Wi-Fi 5 GHz(P_{Cell_OFF} and P_{Cell_ON}) table, the highlighted worst case Low/Mid/High channels are selected for Mode A and Mode B.

Bandwidth	Band	Channel	Frequency (MHz)	Tune-up Output Power (dBm)																																			
				SISO																		MIMO																	
				ANTS / ANT6																		MIMO																	
				a (SISO) Low Rate	a (SISO) Mid Rate	a (SISO) High Rate	11n1ac H20 (SISO) Low Rate	11n1ac H20 (SISO) Mid Rate	11n1ac H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate			
11n1ac H20 (SISO) Low Rate	11n1ac H20 (SISO) Mid Rate	11n1ac H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate	11n H20 (SISO) Low Rate	11n H20 (SISO) Mid Rate	11n H20 (SISO) High Rate							
20 MHz	UNII-1	36	5180	19.0	18.8	18.5	19.0	18.8	18.5	18.5	18.3	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0				
		40	5200	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
		44	5220	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
		48	5240	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
		52	5260	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
	UNII-2A	56	5280	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
		60	5300	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
		64	5320	19.0	18.8	18.5	19.0	18.8	18.5	18.5	18.3	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0				
		100	5500	18.8	18.5	18.3	18.8	18.5	18.3	18.3	18.3	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0				
		104	5520	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0				
UNII-2C	108	5540	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	112	5560	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	116	5580	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	120	5600	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	124	5620	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	128	5640	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	132	5660	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	136	5680	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
	140	5700	19.0	18.5	18.0	19.0	18.5	18.0	17.0	16.8	16.5	16.5	16.0	15.0	12.0	17.0	17.0	17.0	17.0	17.0	16.5	16.0	16.0	15.0	12.0	9.0	17.0	17.0	17.0	16.5	16.0	15.0	12.0	9.0					
	144	5720	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0					
UNII-3	148	5745	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
	152	5765	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
	156	5785	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
	160	5805	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
	164	5825	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
	168	5845	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5	21.5					
40MHz	UNII-1	38	5190																																				
		46	5230																																				
		54	5270																																				
	UNII-2A	62	5310																																				
		70	5350																																				
		110	5550																																				
	UNII-2C	118	5590																																				
		126	5630																																				
		134	5670																																				
		142	5710																																				
UNII-3	149	5750																																					
	157	5790																																					
	165	5830																																					
80MHz	UNII-1	42	5210	17.5	17.0	16.5	17.0	16.5	16.0	16.0	16.0	16.0	16.0	14.0	11.0	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5					
		50	5250	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	17.0	14.0	11.0	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5					
		58	5290	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5	17.0	14.0	11.0	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5					
	UNII-2A	66	5330	17.0	16.8	16.5	16.0	15.8	15.5	15.5																													

Wi-Fi 5 GHz(P_{Cell OFF} and P_{Cell ON})

For 5GHz band, there are three use cases:

- P_{Cell OFF}: This will be used when only Wi-Fi radio is ON and WWAN (Sub-6 GHz) is OFF.
- P_{Cell ON}: This will be used when Wi-Fi radio and Sub 6GHz are ON and 5G FR2 is OFF.
- P_{Cell ON (5G FR2 ON)}: This will be used when the Wi-Fi radio and only 5G FR2 are ON.⁴

Mode	Bandwidth	Channel	Frequency	Tune-up Output Power (dBm) P _{Cell OFF}				Tune-up Output Power (dBm) P _{Cell ON}				Tune-up Output Power (dBm) P _{Cell ON (5G FR2 ON)}			
				ANT5		ANT6		ANT5		ANT6		ANT5		ANT6	
				Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B
U-NII-1 5.2 GHz (SISO)	802.11a 20 MHz	36	5180	19.00	18.00	18.75	18.75	19.00	14.25	13.25	15.00	19.00	13.25	13.25	14.25
		40	5200	20.00	18.00	18.75	18.75	19.25	14.25	13.25	15.00	20.00	13.25	13.25	14.25
		44	5220	20.00	18.00	18.75	18.75	19.25	14.25	13.25	15.00	20.00	13.25	13.25	14.25
		48	5240	20.00	18.00	18.75	18.75	19.25	14.25	13.25	15.00	20.00	13.25	13.25	14.25
	802.11n/ac 40 MHz	38	5190	17.50	17.50	17.50	17.50	17.50	14.25	13.25	15.00	17.50	13.25	13.25	14.25
		46	5230	20.50	18.00	18.75	18.75	19.25	14.25	13.25	15.00	20.50	13.25	13.25	14.25
	802.11ac 80 MHz	42	5210	17.50	17.50	17.50	17.50	17.50	14.25	13.25	15.00	17.50	13.25	13.25	14.25
U-NII-2A 5.3 GHz (SISO)	802.11a 20 MHz	52	5260	20.00	19.00	18.75	18.00	19.25	15.25	13.25	14.25	20.00	14.25	13.25	13.25
		56	5280	20.00	19.00	18.75	18.00	19.25	15.25	13.25	14.25	20.00	14.25	13.25	13.25
		60	5300	20.00	19.00	18.75	18.00	19.25	15.25	13.25	14.25	20.00	14.25	13.25	13.25
		64	5320	19.00	19.00	18.75	18.00	19.00	15.25	13.25	14.25	19.00	14.25	13.25	13.25
	802.11n/ac 40 MHz	54	5270	20.50	19.00	18.75	18.00	19.25	15.25	13.25	14.25	20.50	14.25	13.25	13.25
		62	5310	17.00	17.00	17.00	17.00	17.00	15.25	13.25	14.25	17.00	14.25	13.25	13.25
	802.11ac 80 MHz	58	5290	17.00	17.00	17.00	17.00	17.00	15.25	13.25	14.25	17.00	14.25	13.25	13.25
U-NII-2C 5.5 GHz (SISO)	802.11a 20 MHz	100	5500	18.75	16.25	18.75	17.75	18.75	12.75	13.00	14.00	18.75	11.75	13.00	13.00
		104	5520	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		108	5540	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		112	5560	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		116	5580	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		120	5600	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		124	5620	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		128	5640	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		132	5660	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		136	5680	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		140	5700	19.00	16.25	18.75	17.75	19.00	12.75	13.00	14.00	19.00	11.75	13.00	13.00
		144	5720	20.00	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
	802.11n/ac 40 MHz	102	5510	17.00	16.25	17.00	17.00	17.00	12.75	13.00	14.00	17.00	11.75	13.00	13.00
		110	5550	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		118	5590	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		126	5630	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
	802.11ac 80 MHz	134	5670	19.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		142	5710	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		106	5530	16.00	16.00	16.00	16.00	16.00	12.75	13.00	14.00	16.00	11.75	13.00	13.00
		122	5610	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
		138	5690	20.50	16.25	18.75	17.75	19.25	12.75	13.00	14.00	19.25	11.75	13.00	13.00
U-NII-3 5.8 GHz (SISO)	802.11a 20 MHz	149	5745	21.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
		153	5765	21.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
		157	5785	21.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
		161	5805	21.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
		165	5825	21.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
	802.11n/ac 40 MHz	151	5755	20.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
		159	5795	20.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25
	802.11ac 80 MHz	155	5775	20.50	16.25	20.00	17.50	19.50	12.50	14.50	14.00	19.50	11.50	14.50	13.25

4 Refer to the accompanied Part 1 report for TER analysis. The SAR report will not include this power state for its Simultaneous Transmission scenario.

Wi-Fi 5 GHz Measured Results

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

Power Mode	Antenna	Power Mode A							Power Mode B								
		Band	Mode	Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	SAR Test (Yes/No)	Band	Mode	Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	SAR Test (Yes/No)		
P _{Cell_OFF}	ANT5	U-NII-2A	802.11n HT40	54	5270	19.32	20.50	Yes	U-NII-2A	802.11n HT40	54	5270	17.64	19.00	Yes		
				62	5310	15.84	17.00				62	5310	15.84	17.00			
		U-NII-2C	802.11ac VHT80	106	5530	15.30	16.00	Yes	U-NII-2C	802.11ac VHT80	106	5530	15.29	16.00	Yes		
				122	5610	19.46	20.50				122	5610	15.42	16.25			
				138	5690	19.18	20.50				138	5690	15.34	16.25			
		U-NII-3	802.11a	149	5745	20.22	21.50	Yes	U-NII-3	802.11ac VHT80	155	5775	14.86	16.25	Yes		
				157	5785	20.53	21.50										
				165	5825	20.66	21.50										
	ANT6	U-NII-2A	802.11n HT40	54	5270	17.81	18.75	Yes	U-NII-1	802.11n HT40	38	5190	16.38	17.50	Yes		
				62	5310	15.57	17.00				46	5230	17.62	18.75			
		U-NII-2C	802.11ac VHT80	106	5530	14.88	16.00	Yes	U-NII-2C	802.11ac VHT80	106	5530	14.88	16.00	Yes		
				122	5610	17.88	18.75				122	5610	16.44	17.75			
				138	5690	17.75	18.75				138	5690	16.51	17.75			
		U-NII-3	802.11ac VHT80	155	5775	18.32	20.00	Yes	U-NII-3	802.11ac VHT80	155	5775	16.24	17.50	Yes		
		Power Mode	Antenna	Power Mode A							Power Mode B						
				Band	Mode	Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	SAR Test (Yes/No)	Band	Mode	Ch #	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	SAR Test (Yes/No)
P _{Cell_ON}	ANT5	U-NII-2A	802.11n HT40	54	5270	18.04	19.25	Yes	U-NII-2A	802.11ac VHT80	58	5290	13.96	15.25	Yes		
				62	5310	15.84	17.00										
		U-NII-2C	802.11ac VHT80	106	5530	14.92	16.00	Yes	U-NII-2C	802.11ac VHT80	106	5530	11.44	12.75	Yes		
				122	5610	18.21	19.25				122	5610	11.58	12.75			
				138	5690	17.78	19.25				138	5690	11.12	12.75			
		U-NII-3	802.11ac VHT80	155	5775	17.89	19.50	Yes	U-NII-3	802.11ac VHT80	155	5775	11.28	12.50	Yes		
		ANT6	U-NII-2A	802.11ac VHT80	58	5290	12.07	13.25	Yes	U-NII-1	802.11ac VHT80	42	5210	13.62	15.00	Yes	
					106	5530	11.80	13.00				106	5530	12.39	14.00		
	U-NII-2C		802.11ac VHT80	122	5610	11.83	13.00	Yes	U-NII-2C	802.11ac VHT80	122	5610	12.45	14.00	Yes		
				138	5690	11.22	13.00				138	5690	12.41	14.00			
	U-NII-3		802.11ac VHT80	155	5775	12.81	14.50	Yes	U-NII-3	802.11ac VHT80	155	5775	12.41	14.00	Yes		

Note(s):

1. P_{Cell ON} (5G FR2 ON) and P_{Cell ON} share the same measured power. Power for both power modes were measured using the same setting. With power being within 2 dB of both tune-up limits, P_{Cell ON} will experience greater scaling, thus representing a more conservative value.

9.9. Bluetooth

From October 2016 TCB workshop, this device power and SAR measured is performed with test software, the duty cycle is 100%.

According to KDB 447498 D01 apply to determine simultaneous transmission SAR test exclusion for Wi-Fi MIMO. If the sum of 1-g single transmission chain SAR measurements is $<1.6\text{W/kg}$ and/or the MIMO output power is equal or less than a single chain, then no additional SAR measurements for simultaneously at the specified maximum output power of MIMO operation.

When antennas are spatially separated to the extent that SAR distributions do not overlap and can be treated independently, SAR compliance for simultaneous transmission is determined separately for each individual antenna.

Tune-up Output Power for Bluetooth (P_{low} , P_{high} , and $P_{\text{standalone}}$)

For Bluetooth, there are three use cases:

- Bluetooth P_{low} is used with Wi-Fi and WWAN antennas are active.
- Bluetooth P_{high} is used when Wi-Fi antenna is active and WWAN antenna is inactive or with Wi-Fi inactive and WWAN antenna is active.
- Bluetooth $P_{\text{standalone}}$ is used with Wi-Fi and WWAN antennas are inactive.

Mode	Tune-up Output Power (dBm)											
	Bluetooth P_{low}				Bluetooth P_{high}				Bluetooth $P_{\text{standalone}}$			
	ANT3		ANT4		ANT3		ANT4		ANT3		ANT4	
	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B	Mode A	Mode B
GFSK	14.50	7.50	8.50	10.00	19.50	13.50	15.00	16.50	19.50	18.25	19.50	19.50
EDR	14.50	7.50	8.50	10.00	16.00	13.50	15.00	16.00	16.00	16.00	16.00	16.00
LE1M	14.50	7.50	8.50	10.00	19.50	13.50	15.00	16.50	19.50	18.25	19.50	19.50
LE2M	14.50	7.50	8.50	10.00	19.50	13.50	15.00	16.50	19.50	18.25	19.50	19.50
HDR4	12.50	7.50	8.50	10.00	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50
HDR8	13.50	7.50	8.50	10.00	13.50	13.50	13.50	13.50	13.50	13.50	13.50	13.50

This device supports Bluetooth beamforming. SAR measurement is not required for Beamforming when the output power is equal or less than a single chain. Please refer to BT tune-up procedure.

Bluetooth Measured Results

SAR measurement is not required for the 8PSK, BLE, and HDR. When the secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode.

Power Mode	Antenna	Mode	Ch #	Freq. (MHz)	Power Mode A			Power Mode B		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
Bluetooth P_{low}	ANT3	GFSK	0	2402	12.70	14.50	Yes	6.10	7.50	Yes
			39	2441	13.10	14.50		6.20	7.50	
			78	2480	12.40	14.50		6.00	7.50	
	ANT4	GFSK	0	2402	7.34	8.50	Yes	8.69	10.00	Yes
			39	2441	7.80	8.50		9.33	10.00	
			78	2480	7.56	8.50		9.07	10.00	
Bluetooth P_{high}	ANT3	GFSK	0	2402	18.30	19.50	Yes	11.80	13.50	Yes
			39	2441	18.60	19.50		11.95	13.50	
			78	2480	17.95	19.50		11.80	13.50	
	ANT4	GFSK	0	2402	13.15	15.00	Yes	14.65	16.50	Yes
			39	2441	13.76	15.00		15.22	16.50	
			78	2480	13.45	15.00		14.74	16.50	
Bluetooth $P_{\text{standalone}}$	ANT3	GFSK	0	2402	18.30	19.50	Yes	16.35	18.25	Yes
			39	2441	18.60	19.50		16.45	18.25	
			78	2480	18.20	19.50		16.25	18.25	
	ANT4	GFSK	0	2402	18.00	19.50	Yes	18.20	19.50	Yes
			39	2441	18.23	19.50		18.76	19.50	
			78	2480	18.01	19.50		18.35	19.50	

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	0.4	0.4	100.00%	1.00

Note(s):

Duty Cycle = (T on / period) * 100%

Duty Cycle plots

GFSK



9.10. MSS (Mobile Satellite Service)

This device supports Mobile Satellite Service with Tx over L-Band (1610 – 1626.5 MHz) and Rx over S-Band (2483.5 – 2500 MHz).

Radio Astronomy Zone exclusion requirement is implemented by Geo-fencing in Software. Transmit frequency will be changed based on network direction when Astronomy site location is detected.

Output Power for MSS

Antenna	Mode	Power Mode B				
		Channel	Freq. (MHz)	Meas Pwr (dBm)	Tune-up (dBm)	SAR Test (Yes/No)
ANT1	1-PRB SC-FDMA	262316	1610.1	18.7	19.0	Yes
		262391	1617.6	18.7	19.0	
		262466	1625.1	18.7	19.0	
ANT4	1-PRB SC-FDMA	262316	1610.1	19.7	21.2	Yes
		262391	1617.6	19.8	21.2	
		262466	1625.1	19.8	21.2	

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the

highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	GPRS 2 Slots	Mode A	0	Left Touch	190	836.6	32.5	31.4	0.147	0.189	0.116	0.149	1
					Left Tilt	190	836.6	32.5	31.4	0.076	0.098	0.059	0.076	
					Right Touch	190	836.6	32.5	31.4	0.243	0.313	0.186	0.240	
					Right Tilt	190	836.6	32.5	31.4	0.107	0.138	0.085	0.110	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	190	836.6	30.5	30.2	0.392	0.420	0.218	0.234	2
					Front	190	836.6	30.5	30.2	0.250	0.268	0.150	0.161	
	Hotspot	GPRS 2 Slots	Mode B	5	Edge 2	190	836.6	30.5	30.2	0.604	0.647	0.384	0.411	3
					Edge 3	190	836.6	30.5	30.2	0.420	0.450	0.182	0.195	
ANT2	Head	GPRS 2 Slots	Mode A	0	Edge 4	190	836.6	30.5	30.2	0.200	0.214	0.127	0.136	
					Left Touch	190	836.6	30.1	29.1	0.613	0.781	0.411	0.523	
					Left Tilt	190	836.6	30.1	29.1	0.363	0.462	0.204	0.260	
					Right Touch	128	824.4	30.1	29.0	0.738	0.944	0.492	0.629	
						190	836.6	30.1	29.1	0.631	0.804	0.410	0.522	
					Right Tilt	251	848.8	30.1	29.0	0.729	0.931	0.478	0.610	
						190	836.6	30.1	29.1	0.395	0.503	0.221	0.281	
					Right Tilt	190	836.6	30.1	29.1	0.395	0.503	0.221	0.281	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	190	836.6	31.5	31.2	0.448	0.479	0.283	0.303	5
					Front	190	836.6	31.5	31.2	0.273	0.292	0.178	0.190	
	Hotspot	GPRS 2 Slots	Mode B	5	Edge 1	190	836.6	31.5	31.2	0.110	0.118	0.053	0.056	
					Edge 2	190	836.6	31.5	31.2	0.102	0.109	0.065	0.069	
					Edge 3	190	836.6	31.5	31.2	0.102	0.109	0.065	0.069	
					Edge 4	190	836.6	31.5	31.2	0.198	0.212	0.128	0.137	

10.2. GSM1900

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	GPRS 2 Slots	Mode A	0	Left Touch	661	1880.0	31.0	30.3	0.122	0.143	0.076	0.089	6
					Left Tilt	661	1880.0	31.0	30.3	0.096	0.113	0.060	0.070	
					Right Touch	661	1880.0	31.0	30.3	0.266	0.313	0.167	0.196	
					Right Tilt	661	1880.0	31.0	30.3	0.081	0.095	0.051	0.060	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	661	1880.0	25.0	23.8	0.385	0.506	0.186	0.245	7
					Front	661	1880.0	25.0	23.8	0.210	0.276	0.111	0.146	
	Hotspot	GPRS 2 Slots	Mode B	5	Edge 2	661	1880.0	25.0	23.8	0.285	0.375	0.137	0.180	8
					Edge 3	512	1850.2	25.0	23.8	0.703	0.927	0.324	0.427	
						661	1880.0	25.0	23.8	0.613	0.806	0.285	0.375	
						810	1909.8	25.0	23.8	0.551	0.735	0.258	0.344	
					Edge 4	661	1880.0	25.0	23.8	0.010	0.013	0.006	0.008	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	GPRS 2 Slots	Mode A	0	Left Touch	661	1880.0	27.5	27.0	0.177	0.197	0.109	0.121	9
					Left Tilt	661	1880.0	27.5	27.0	0.127	0.142	0.071	0.079	
					Right Touch	512	1850.2	27.5	27.0	0.741	0.831	0.393	0.441	
						661	1880.0	27.5	27.0	0.720	0.802	0.386	0.430	
						810	1909.8	27.5	27.0	0.767	0.859	0.411	0.460	
					Right Tilt	661	1880.0	27.5	27.0	0.361	0.402	0.162	0.181	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	512	1850.2	27.7	26.7	0.547	0.697	0.329	0.419	10
						661	1880.0	27.7	26.7	0.650	0.813	0.294	0.368	
						810	1909.8	27.7	26.7	0.728	0.916	0.329	0.414	
	Hotspot	GPRS 2 Slots	Mode B	5	Front	661	1880.0	27.7	26.7	0.208	0.260	0.106	0.133	
					Edge 1	661	1880.0	27.7	26.7	0.328	0.410	0.146	0.183	
					Edge 2	661	1880.0	27.7	26.7	0.008	0.010	0.003	0.004	
					Edge 4	661	1880.0	27.7	26.7	0.479	0.599	0.238	0.298	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	GPRS 2 Slots	Mode A	0	Left Touch	661	1880.0	30.5	29.1	0.263	0.363	0.161	0.222	11
					Left Tilt	661	1880.0	30.5	29.1	0.132	0.182	0.078	0.108	
					Right Touch	661	1880.0	30.5	29.1	0.084	0.116	0.052	0.072	
					Right Tilt	661	1880.0	30.5	29.1	0.091	0.126	0.052	0.072	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	512	1850.2	26.8	26.6	0.784	0.827	0.414	0.437	12
						661	1880.0	26.8	26.6	0.822	0.861	0.449	0.470	
						810	1909.8	26.8	26.6	0.864	0.915	0.481	0.510	
	Hotspot	GPRS 2 Slots	Mode B	5	Front	661	1880.0	26.8	26.6	0.696	0.729	0.390	0.408	
					Edge 3	661	1880.0	26.8	26.6	0.310	0.325	0.149	0.156	
					Edge 4	661	1880.0	26.8	26.6	0.606	0.635	0.316	0.331	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	GPRS 2 Slots	Mode A	0	Left Touch	512	1850.2	25.2	24.8	0.813	0.891	0.424	0.465	13
						661	1880.0	25.2	24.9	0.794	0.851	0.446	0.478	
						810	1909.8	25.2	24.7	0.807	0.905	0.453	0.508	
					Left Tilt	661	1880.0	25.2	24.9	0.561	0.601	0.278	0.298	
					Right Touch	661	1880.0	25.2	24.9	0.302	0.324	0.178	0.191	
					Right Tilt	661	1880.0	25.2	24.9	0.215	0.230	0.120	0.129	
	Body & Hotspot	GPRS 2 Slots	Mode B	5	Rear	512	1850.2	26.5	25.2	0.662	0.893	0.358	0.483	14
						661	1880.0	26.5	25.3	0.693	0.914	0.379	0.500	
						810	1909.8	26.5	25.3	0.705	0.929	0.386	0.509	
	Hotspot	GPRS 2 Slots	Mode B	5	Front	661	1880.0	26.5	25.3	0.409	0.539	0.233	0.307	
					Edge 1	661	1880.0	26.5	25.3	0.355	0.468	0.160	0.211	
					Edge 2	661	1880.0	26.5	25.3	0.447	0.589	0.224	0.295	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.	
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled		
ANT1	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	9400	1880.0	25.7	25.4	0.176	0.187	0.115	0.122		
					Left Tilt	9400	1880.0	25.7	25.4	0.150	0.160	0.092	0.098		
					Right Touch	9400	1880.0	25.7	25.4	0.389	0.414	0.241	0.256		
					Right Tilt	9400	1880.0	25.7	25.4	0.113	0.120	0.075	0.080		
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	9400	1880.0	19.0	18.6	0.385	0.422	0.172	0.189	16	
					Front	9400	1880.0	19.0	18.6	0.281	0.308	0.144	0.158		
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 2	9400	1880.0	19.0	18.6	0.351	0.385	0.170	0.186		
					Edge 3	9262	1852.4	19.0	18.6	0.843	0.929	0.391	0.431		17
						9400	1880.0	19.0	18.6	0.731	0.802	0.341	0.374		
					9538	1907.6	19.0	18.5	0.673	0.753	0.316	0.354			
Edge 4	9400	1880.0	19.0	18.6	0.020	0.022	0.011	0.012							
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.	
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled		
ANT2	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	9400	1880.0	21.5	21.2	0.207	0.221	0.132	0.141		
					Left Tilt	9400	1880.0	21.5	21.2	0.178	0.190	0.104	0.111		
					Right Touch	9262	1852.4	21.5	21.1	0.757	0.824	0.424	0.462		
						9400	1880.0	21.5	21.2	0.805	0.859	0.456	0.486		
					9538	1907.6	21.5	21.1	0.849	0.925	0.472	0.514	18		
	Right Tilt	9400	1880.0	21.5	21.2	0.741	0.790	0.359	0.383						
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	9262	1852.4	21.7	21.4	0.807	0.873	0.347	0.375	19	
						9400	1880.0	21.7	21.4	0.814	0.866	0.387	0.412		
						9538	1907.6	21.7	21.4	0.793	0.858	0.373	0.403		
	Front	9400	1880.0	21.7	21.4	0.238	0.253	0.126	0.134						
Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 1	9400	1880.0	21.7	21.4	0.451	0.480	0.193	0.205			
				Edge 2	9400	1880.0	21.7	21.4	0.015	0.016	0.008	0.009			
				Edge 4	9400	1880.0	21.7	21.4	0.467	0.497	0.242	0.258			
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.	
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled		
ANT3	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	9400	1880.0	24.8	24.3	0.346	0.385	0.214	0.238	20	
					Left Tilt	9400	1880.0	24.8	24.3	0.177	0.197	0.112	0.125		
					Right Touch	9400	1880.0	24.8	24.3	0.198	0.220	0.125	0.139		
					Right Tilt	9400	1880.0	24.8	24.3	0.187	0.208	0.108	0.120		
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	9262	1852.4	20.8	20.2	0.751	0.868	0.413	0.477	21	
						9400	1880.0	20.8	20.3	0.824	0.918	0.459	0.511		
						9538	1907.6	20.8	20.2	0.786	0.911	0.441	0.511		
	Front	9400	1880.0	20.8	20.3	0.451	0.503	0.255	0.284						
Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 3	9400	1880.0	20.8	20.3	0.293	0.326	0.145	0.162			
				Edge 4	940										

10.4. W-CDMA Band 4

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	1413	1732.6	24.8	24.3	0.040	0.045	0.026	0.028	25
					Left Tilt	1413	1732.6	24.8	24.3	0.039	0.043	0.025	0.027	
					Right Touch	1413	1732.6	24.8	24.3	0.093	0.103	0.060	0.067	
					Right Tilt	1413	1732.6	24.8	24.3	0.053	0.059	0.034	0.038	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	1413	1732.6	18.1	17.6	0.484	0.543	0.241	0.270	26
					Front	1413	1732.6	18.1	17.6	0.377	0.423	0.181	0.203	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 2	1413	1732.6	18.1	17.6	0.076	0.085	0.037	0.042	27
					Edge 3	1312	1712.4	18.1	17.6	0.762	0.855	0.359	0.403	
						1413	1732.6	18.1	17.6	0.800	0.898	0.376	0.422	
						1513	1752.6	18.1	17.5	0.828	0.944	0.385	0.439	
					Edge 4	1413	1732.6	18.1	17.6	0.022	0.024	0.009	0.010	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	1413	1732.6	21.0	20.7	0.348	0.373	0.179	0.192	28
					Left Tilt	1413	1732.6	21.0	20.7	0.339	0.363	0.164	0.176	
					Right Touch	1312	1712.4	21.0	20.7	0.767	0.826	0.376	0.405	
						1413	1732.6	21.0	20.7	0.767	0.822	0.387	0.415	
					Right Tilt	1513	1752.6	21.0	20.7	0.708	0.762	0.353	0.380	
						1413	1732.6	21.0	20.7	0.694	0.744	0.333	0.357	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	1312	1712.4	21.3	21.0	0.714	0.763	0.348	0.372	29
						1413	1732.6	21.3	21.1	0.851	0.901	0.398	0.422	
						1513	1752.6	21.3	21.0	0.772	0.829	0.338	0.363	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Front	1413	1732.6	21.3	21.1	0.407	0.431	0.200	0.212	
					Edge 1	1413	1732.6	21.3	21.1	0.638	0.676	0.300	0.318	
					Edge 2	1413	1732.6	21.3	21.1	0.015	0.016	0.008	0.008	
					Edge 4	1413	1732.6	21.3	21.1	0.358	0.379	0.181	0.192	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	1413	1732.6	25.5	25.1	0.380	0.417	0.242	0.265	30
					Left Tilt	1413	1732.6	25.5	25.1	0.146	0.160	0.092	0.101	
					Right Touch	1413	1732.6	25.5	25.1	0.125	0.137	0.083	0.091	
					Right Tilt	1413	1732.6	25.5	25.1	0.122	0.134	0.075	0.082	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	1312	1712.4	21.5	20.9	0.766	0.890	0.398	0.462	31
						1413	1732.6	21.5	20.9	0.742	0.852	0.392	0.450	
						1513	1752.6	21.5	20.9	0.745	0.863	0.400	0.464	
					Front	1413	1732.6	21.5	20.9	0.319	0.366	0.188	0.216	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 3	1413	1732.6	21.5	20.9	0.181	0.208	0.075	0.086	
					Edge 4	1413	1732.6	21.5	20.9	0.527	0.605	0.306	0.351	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	1312	1712.4	19.1	18.5	0.668	0.767	0.340	0.390	32
						1413	1732.6	19.1	18.5	0.721	0.822	0.367	0.418	
						1513	1752.6	19.1	18.5	0.727	0.839	0.371	0.428	
					Left Tilt	1413	1732.6	19.1	18.5	0.363	0.414	0.178	0.203	
					Right Touch	1413	1732.6	19.1	18.5	0.221	0.252	0.126	0.144	
					RightTilt	1413	1732.6	19.1	18.5	0.187	0.213	0.105	0.120	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	1413	1732.6	19.3	18.6	0.494	0.576	0.270	0.315	33
					Front	1413	1732.6	19.3	18.6	0.251	0.293	0.133	0.155	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 1	1413	1732.6	19.3	18.6	0.253	0.295	0.111	0.130	
					Edge 2	1312	1712.4	19.3	18.6	0.636	0.747	0.313	0.368	
						1413	1732.6	19.3	18.6	0.710	0.828	0.349	0.407	
						1513	1752.6	19.3	18.6	0.678	0.800	0.337	0.398	

10.5. W-CDMA Band 5

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	4183	836.6	25.7	25.5	0.154	0.161	0.118	0.123	35
					Left Tilt	4183	836.6	25.7	25.5	0.106	0.111	0.084	0.088	
					Right Touch	4183	836.6	25.7	25.5	0.222	0.232	0.166	0.173	
					RightTilt	4183	836.6	25.7	25.5	0.113	0.118	0.088	0.092	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	4132	826.4	24.5	23.9	0.712	0.817	0.389	0.447	36
						4183	836.6	24.5	23.9	0.773	0.888	0.432	0.496	
						4233	846.6	24.5	23.9	0.697	0.800	0.389	0.447	
					Front	4183	836.6	24.5	23.9	0.178	0.204	0.109	0.125	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 2	4183	836.6	24.5	23.9	0.615	0.706	0.394	0.452	
					Edge 3	4183	836.6	24.5	23.9	0.299	0.343	0.132	0.152	
Edge 4					4183	836.6	24.5	23.9	0.178	0.204	0.115	0.132		
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	Rel 99 RMC 12.2 kbps	Mode A	0	Left Touch	4183	836.6	24.1	24.0	0.648	0.671	0.449	0.465	37
					Left Tilt	4183	836.6	24.1	24.0	0.466	0.482	0.264	0.273	
					Right Touch	4132	826.4	24.1	23.9	0.892	0.928	0.581	0.604	
						4183	836.6	24.1	24.0	0.846	0.876	0.656	0.679	
					Right Tilt	4233	846.6	24.1	23.9	0.806	0.840	0.525	0.547	
						4183	836.6	24.1	24.0	0.581	0.601	0.300	0.311	
	Body & Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Rear	4183	836.6	24.7	24.3	0.578	0.634	0.369	0.405	38
					Front	4183	836.6	24.7	24.3	0.302	0.331	0.195	0.214	
	Hotspot	Rel 99 RMC 12.2 kbps	Mode B	5	Edge 1	4183	836.6	24.7	24.3	0.011	0.012	0.007	0.008	
					Edge 2	4183	836.6	24.7	24.3	0.213	0.234	0.136	0.149	
Edge 4					4183	836.6	24.7	24.3	0.407	0.446	0.261	0.286		

10.6. LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	20525	836.5	1	25	25.7	25.3	0.154	0.169	0.117	0.128	
								25	12	24.7	24.4	0.126	0.136	0.097	0.105	
					Left Tilt	20525	836.5	1	25	25.7	25.3	0.105	0.115	0.079	0.087	
								25	12	24.7	24.4	0.081	0.088	0.063	0.068	
					Right Touch	20525	836.5	1	25	25.7	25.3	0.185	0.203	0.143	0.157	39
								25	12	24.7	24.4	0.157	0.170	0.119	0.129	
					Right Tilt	20525	836.5	1	25	25.7	25.3	0.093	0.102	0.074	0.081	
								25	12	24.7	24.4	0.079	0.085	0.062	0.067	
	Body & Hotspot	QPSK	Mode B	5	Rear	20525	836.5	1	25	24.5	24.0	0.674	0.751	0.387	0.431	40
								25	12	24.5	24.1	0.747	0.817	0.411	0.450	
					Front	20525	836.5	1	25	24.5	24.0	0.297	0.331	0.174	0.194	
								25	12	24.5	24.1	0.306	0.335	0.179	0.196	
					Edge 2	20525	836.5	1	25	24.5	24.0	0.547	0.610	0.344	0.383	
								25	12	24.5	24.1	0.563	0.616	0.354	0.387	
	Hotspot	QPSK	Mode B	5	Edge 3	20525	836.5	1	25	24.5	24.0	0.250	0.279	0.117	0.130	
								25	12	24.5	24.1	0.289	0.316	0.132	0.144	
					Edge 4	20525	836.5	1	25	24.5	24.0	0.162	0.181	0.103	0.115	
								25	12	24.5	24.1	0.167	0.183	0.107	0.117	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	20525	836.5	1	25	24.1	23.9	0.716	0.748	0.499	0.521	
								25	12	23.7	23.4	0.641	0.688	0.447	0.480	
					Left Tilt	20525	836.5	1	25	24.1	23.9	0.455	0.475	0.264	0.276	
								25	12	23.7	23.4	0.401	0.431	0.233	0.250	
					Right Touch	20525	836.5	1	25	24.1	23.9	0.861	0.900	0.586	0.612	41
								25	12	23.7	23.4	0.770	0.827	0.531	0.570	
					Right Tilt	20525	836.5	50	0	23.7	23.4	0.743	0.802	0.502	0.542	
								1	25	24.1	23.9	0.535	0.559	0.306	0.320	
	Body & Hotspot	QPSK	Mode B	5	Rear	20525	836.5	1	25	24.7	24.4	0.691	0.749	0.435	0.472	42
								25	12	23.7	23.4	0.562	0.604	0.353	0.379	
					Front	20525	836.5	1	25	24.7	24.4	0.408	0.442	0.265	0.287	
								25	12	23.7	23.4	0.332	0.357	0.216	0.232	
					Edge 1	20525	836.5	1	25	24.7	24.4	0.248	0.269	0.121	0.131	
								25	12	23.7	23.4	0.194	0.208	0.096	0.103	
	Hotspot	QPSK	Mode B	5	Edge 2	20525	836.5	1	25	24.7	24.4	0.260	0.282	0.165	0.179	
								25	12	23.7	23.4	0.208	0.223	0.132	0.142	
					Edge 4	20525	836.5	1	25	24.7	24.4	0.482	0.522	0.309	0.335	
								25	12	23.7	23.4	0.395	0.424	0.252	0.271	

UL CA 5B

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 1	Head	QPSK	Mode A	0	Right Touch	20476	831.6	1	49	20575	841.5	1	0	25.7	25.2	0.135	0.153	0.103	0.117	
	Body & Hotspot	QPSK	Mode B	5	Rear	20476	831.6	1	49	20575	841.5	1	0	24.5	24.0	0.381	0.431	0.214	0.242	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 2	Head	QPSK	Mode A	0	Right Touch	20476	831.6	1	49	20575	841.5	1	0	24.10	23.80	0.502	0.538	0.349	0.374	
	Body & Hotspot	QPSK	Mode B	5	Rear	20476	831.6	1	49	20575	841.5	1	0	24.70	24.30	0.402	0.441	0.252	0.276	

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

10.7. LTE Band 7 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Pow er Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Pow er (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.					
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled						
ANT1	Head	QPSK	Mode A	0	Left Touch	21100	2535.0	1	49	25.7	25.0	0.238	0.278	0.132	0.154						
								50	24	24.7	24.2	0.206	0.233	0.115	0.130						
					Left Tilt	21100	2535.0	1	49	25.7	25.0	0.124	0.145	0.059	0.069						
								50	24	24.7	24.2	0.106	0.120	0.050	0.056						
					Right Touch	21100	2535.0	1	49	25.7	25.0	0.508	0.594	0.257	0.301	43					
								50	24	24.7	24.2	0.450	0.508	0.228	0.258						
					Right Tilt	21100	2535.0	1	49	25.7	25.0	0.059	0.069	0.030	0.035						
								50	24	24.7	24.2	0.056	0.063	0.028	0.032						
					Body & Hotspot	QPSK	Mode B	5	Rear	21100	2535.0	1	49	20.2	19.9	0.559	0.596	0.301	0.321	44	
												50	24	20.2	20.0	0.573	0.601	0.307	0.322		
	Front	21100	2535.0	1					49	20.2	19.9	0.352	0.375	0.175	0.187						
				50					24	20.2	20.0	0.424	0.445	0.175	0.184						
	Hotspot	QPSK	Mode B	5					Edge 2	20850	2510.0	1	49	20.2	19.9	0.840	0.900	0.356	0.381		
												50	24	20.2	19.9	0.862	0.919	0.365	0.389		
					21100	2535.0	1	49		20.2	19.9	0.762	0.813	0.329	0.351						
							50	24		20.2	20.0	0.778	0.817	0.335	0.352						
					21350	2560.0	100	0		20.2	20.0	0.859	0.902	0.365	0.383						
							1	49		20.2	19.9	0.775	0.823	0.330	0.350						
					Edge 3	20850	2510.0	1	49	20.2	19.9	0.635	0.680	0.244	0.261						
								50	24	20.2	19.9	0.717	0.765	0.271	0.289						
						21100	2535.0	1	49	20.2	19.9	0.808	0.862	0.307	0.327						
								50	24	20.2	20.0	0.859	0.902	0.322	0.338						
						21350	2560.0	100	0	20.2	20.0	0.854	0.896	0.323	0.339						
								1	49	20.2	19.9	0.793	0.842	0.304	0.323						
	Edge 4	21100	2535.0	1	49	20.2	19.9	0.068	0.073	0.035	0.037										
				50	24	20.2	20.0	0.068	0.071	0.035	0.037										
	Antenna	RF Exposure Conditions	Mode	Pow er Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Pow er (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.				
	ANT2	Head	QPSK	Mode A	0	Left Touch	21100	2535.0	1	49	18.5	17.7	0.402	0.483	0.155	0.186					
50									24	18.5	17.7	0.413	0.499	0.159	0.192						
Left Tilt						21100	2535.0	1	49	18.5	17.7	0.462	0.555	0.173	0.208						
								50	24	18.5	17.7	0.475	0.574	0.177	0.214						
Right Touch						20850	2510.0	1	49	18.5	17.6	0.675	0.830	0.264	0.325						
								50	24	18.5	17.7	0.684	0.830	0.267	0.324						
						21100	2535.0	1	49	18.5	17.7	0.708	0.851	0.273	0.328						
								50	24	18.5	17.7	0.731	0.883	0.281	0.339						
						21350	2560.0	100	0	18.5	17.7	0.725	0.872	0.279	0.335	46					
								1	49	18.5	17.7	0.750	0.904	0.288	0.347						
Right Tilt						21100	2535.0	50	24	18.5	17.8	0.765	0.903	0.294	0.347						
								1	49	18.5	17.7	0.506	0.608	0.187	0.225						
Body & Hotspot		QPSK	Mode B	5	Rear	20850	2510.0	1	49	18.8	17.9	0.576	0.702	0.234	0.285						
								50	24	18.8	18.0	0.585	0.703	0.239	0.287						
						21100	2535.0	1	49	18.8	18.2	0.808	0.938	0.311	0.361	47					
								50	24	18.8	18.1	0.774	0.899	0.302	0.351						
						21350	2560.0	100	0	18.8	18.1	0.769	0.914	0.298	0.354						
								1	49	18.8	18.0	0.639	0.770	0.251	0.302						
					Front	21100	2535.0	1	49	18.8	18.2	0.381	0.443	0.147	0.171						
								50	24	18.8	18.2	0.387	0.449	0.151	0.175						
						Hotspot	QPSK	Mode B	5	Edge 1	21100	2535.0	1	49	18.8	18.2	0.587	0.682	0.219	0.254	
													50	24	18.8	18.2	0.603	0.700	0.225	0.261	
Edge 2		21100	2535.0	1	49					18.8	18.2	0.037	0.043	0.018	0.021						
				50	24					18.8	18.2	0.038	0.044	0.018	0.021						
Edge 4		21100	2535.0	1	49	18.8	18.2	0.668	0.776	0.304	0.353										
				50	24	18.8	18.2	0.684	0.794	0.310	0.360										

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	QPSK	Mode A	0	Left Touch	21100	2535.0	1	49	23.3	22.9	0.637	0.698	0.341	0.374	48
								50	24	23.3	23.0	0.668	0.716	0.358	0.384	
					Left Tilt	21100	2535.0	1	49	23.3	22.9	0.299	0.328	0.157	0.172	
								50	24	23.3	23.0	0.307	0.329	0.160	0.171	
					Right Touch	21100	2535.0	1	49	23.3	22.9	0.334	0.366	0.187	0.205	
								50	24	23.3	23.0	0.340	0.364	0.191	0.205	
					Right Tilt	21100	2535.0	1	49	23.3	22.9	0.404	0.443	0.208	0.228	
								50	24	23.3	23.0	0.418	0.448	0.216	0.231	
	Body & Hotspot	QPSK	Mode B	5	Rear	21100	2535.0	1	49	17.1	16.6	0.572	0.642	0.271	0.304	
								50	24	17.1	16.6	0.594	0.666	0.281	0.315	
					Front	21100	2535.0	1	49	17.1	16.6	0.428	0.480	0.197	0.221	
								50	24	17.1	16.6	0.438	0.491	0.201	0.226	
	Hotspot	QPSK	Mode B	5	Edge 3	21100	2535.0	1	49	17.1	16.6	0.093	0.104	0.042	0.047	
								50	24	17.1	16.6	0.094	0.105	0.042	0.047	
					Edge 4	20850	2510.0	1	49	17.1	16.5	0.731	0.835	0.318	0.363	
								50	24	17.1	16.6	0.749	0.842	0.324	0.364	
								1	49	17.1	16.6	0.741	0.831	0.318	0.357	
								50	24	17.1	16.6	0.749	0.840	0.322	0.361	
						21100	2535.0	100	0	17.1	16.5	0.734	0.843	0.316	0.363	
								1	49	17.1	16.4	0.762	0.906	0.327	0.389	
					21350	2560.0		1	49	17.1	16.4	0.762	0.906	0.327	0.389	
								50	24	17.1	16.4	0.786	0.928	0.336	0.397	50
ANT4	Head	QPSK	Mode A	0	Left Touch	20850	2510.0	1	49	19.5	18.7	0.704	0.856	0.358	0.435	
								50	24	19.5	18.7	0.721	0.867	0.366	0.440	
						21100	2535.0	1	49	19.5	18.7	0.717	0.872	0.373	0.454	
								50	24	19.5	18.7	0.744	0.888	0.384	0.458	
					21350	2560.0		100	0	19.5	18.7	0.749	0.900	0.388	0.466	
								1	49	19.5	18.6	0.740	0.904	0.383	0.468	
								50	24	19.5	18.7	0.760	0.910	0.394	0.472	51
					Left Tilt	21100	2535.0	1	49	19.5	18.7	0.450	0.547	0.203	0.247	
								50	24	19.5	18.7	0.462	0.552	0.209	0.250	
					Right Touch	21100	2535.0	1	49	19.5	18.7	0.132	0.161	0.072	0.088	
								50	24	19.5	18.7	0.136	0.162	0.075	0.090	
					Right Tilt	21100	2535.0	1	49	19.5	18.7	0.083	0.101	0.042	0.051	
								50	24	19.5	18.7	0.083	0.099	0.043	0.051	
	Body & Hotspot	QPSK	Mode B	5	Rear	21100	2535.0	1	49	20.4	19.6	0.527	0.639	0.282	0.342	52
								50	24	20.4	19.6	0.523	0.626	0.281	0.336	
					Front	21100	2535.0	1	49	20.4	19.6	0.237	0.288	0.127	0.154	
								50	24	20.4	19.6	0.241	0.288	0.129	0.154	
	Hotspot	QPSK	Mode B	5	Edge 1	21100	2535.0	1	49	20.4	19.6	0.122	0.148	0.047	0.057	
								50	24	20.4	19.6	0.125	0.150	0.048	0.057	
					Edge 2	20850	2510.0	1	49	20.4	19.5	0.730	0.894	0.319	0.391	
								50	24	20.4	19.5	0.748	0.916	0.326	0.399	
						21100	2535.0	1	49	20.4	19.6	0.772	0.937	0.335	0.406	
								50	24	20.4	19.6	0.788	0.943	0.342	0.409	
						21350	2560.0	100	0	20.4	19.6	0.783	0.935	0.339	0.405	
								1	49	20.4	19.5	0.770	0.939	0.334	0.407	
								50	24	20.4	19.7	0.785	0.933	0.340	0.404	

UL CA 7C

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 1	Head	QPSK	Mode A	0	Right Touch	21001	2525.1	1	99	21199	2544.9	1	0	25.7	25.2	0.238	0.267	0.121	0.136	
	Body & Hotspot	QPSK	Mode B	5	Rear	21001	2525.1	1	99	21199	2544.9	1	0	20.2	19.6	0.326	0.374	0.134	0.154	
	Hotspot	QPSK	Mode B	5	Edge 2	20850	2510.0	1	99	21048	2529.8	1	0	20.2	19.6	0.421	0.483	0.177	0.203	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 2	Head	QPSK	Mode A	0	FALSE	21152	2540.2	1	99	21350	2560.0	1	0	18.50	18.00	0.398	0.447	0.150	0.168	
	Body & Hotspot	QPSK	Mode B	5	Rear	21001	2525.1	1	99	21199	2544.9	1	0	18.80	18.30	0.510	0.572	0.194	0.218	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 3	Head	QPSK	Mode A	0	Left Touch	21001	2525.1	1	99	21199	2544.9	1	0	23.30	22.80	0.315	0.353	0.171	0.192	
	Body & Hotspot	QPSK	Mode B	5	Rear	21001	2525.1	1	99	21199	2544.9	1	0	17.10	16.60	0.496	0.557	0.222	0.249	
	Hotspot	QPSK	Mode B	5	Edge 4	21152	2540.2	1	99	21350	2560.0	1	0	17.10	16.60	0.413	0.463	0.172	0.193	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 4	Head	QPSK	Mode A	0	Left Touch	21152	2540.2	1	99	21350	2560.0	1	0	19.50	18.60	0.431	0.530	0.215	0.265	
	Body & Hotspot	QPSK	Mode B	5	Rear	21001	2525.1	1	99	21199	2544.9	1	0	20.40	19.60	0.466	0.560	0.251	0.302	
	Hotspot	QPSK	Mode B	5	Edge 2	21001	2525.1	1	99	21199	2544.9	1	0	20.40	19.60	0.490	0.589	0.216	0.260	

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

10.8. LTE Band 12 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	23095	707.5	1	25	25.7	25.2	0.141	0.160	0.109	0.124	54
								25	12	24.7	24.2	0.097	0.110	0.076	0.086	
					Left Tilt	23095	707.5	1	25	25.7	25.2	0.010	0.011	0.000	0.000	
								25	12	24.7	24.2	0.000	0.000	0.000	0.000	
					Right Touch	23095	707.5	1	25	25.7	25.2	0.015	0.017	0.011	0.012	
								25	12	24.7	24.2	0.010	0.011	0.008	0.009	
					Right Tilt	23095	707.5	1	25	25.7	25.2	0.054	0.061	0.043	0.049	
								25	12	24.7	24.2	0.012	0.014	0.009	0.011	
	Body & Hotspot	QPSK	Mode B	5	Rear	23095	707.5	1	25	25.7	25.2	0.476	0.540	0.280	0.318	55
								25	12	24.7	24.2	0.385	0.435	0.225	0.254	
					Front	23095	707.5	1	25	25.7	25.2	0.263	0.299	0.165	0.187	
								25	12	24.7	24.2	0.204	0.230	0.128	0.145	
	Hotspot	QPSK	Mode B	5	Edge 2	23095	707.5	1	25	25.7	25.2	0.758	0.860	0.498	0.565	56
								25	12	24.7	24.2	0.634	0.716	0.414	0.468	
					Edge 3	23095	707.5	1	25	25.7	25.2	0.248	0.281	0.117	0.133	
								25	12	24.7	24.2	0.206	0.233	0.097	0.110	
					Edge 4	23095	707.5	1	25	25.7	25.2	0.306	0.347	0.138	0.157	
								25	12	24.7	24.2	0.251	0.284	0.112	0.127	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	23095	707.5	1	25	24.3	23.8	0.580	0.658	0.359	0.407	
								25	12	23.7	23.0	0.490	0.581	0.327	0.388	
					Left Tilt	23095	707.5	1	25	24.3	23.8	0.614	0.697	0.321	0.364	
								25	12	23.7	23.0	0.570	0.676	0.291	0.345	
					Right Touch	23095	707.5	1	25	24.3	23.8	0.803	0.911	0.497	0.564	57
								25	12	23.7	23.0	0.701	0.831	0.431	0.511	
					Right Tilt	23095	707.5	50	0	23.7	22.9	0.649	0.773	0.409	0.487	
								1	25	24.3	23.8	0.749	0.850	0.402	0.456	
	Body & Hotspot	QPSK	Mode B	5	Rear	23095	707.5	25	12	23.7	23.0	0.653	0.774	0.349	0.414	
								1	25	24.7	24.3	0.716	0.785	0.409	0.448	58
					Front	23095	707.5	25	12	23.7	23.0	0.648	0.768	0.385	0.457	
								1	25	24.7	24.3	0.265	0.291	0.182	0.200	
	Hotspot	QPSK	Mode B	5	Edge 1	23095	707.5	25	12	23.7	23.0	0.208	0.247	0.144	0.171	
								1	25	24.7	24.3	0.285	0.312	0.134	0.147	
					Edge 2	23095	707.5	25	12	23.7	23.0	0.239	0.283	0.110	0.130	
								1	25	24.7	24.3	0.138	0.151	0.091	0.100	
					Edge 4	23095	707.5	25	12	23.7	23.0	0.102	0.121	0.066	0.078	
								1	25	24.7	24.3	0.251	0.275	0.165	0.181	
								25	12	23.7	23.0	0.196	0.232	0.129	0.153	

10.9. LTE Band 13 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	23230	782.0	1	25	25.7	25.4	0.178	0.190	0.138	0.148	
								25	12	24.7	24.4	0.136	0.147	0.106	0.115	
					Left Tilt	23230	782.0	1	25	25.7	25.4	0.112	0.120	0.087	0.093	
								25	12	24.7	24.4	0.089	0.096	0.070	0.076	
					Right Touch	23230	782.0	1	25	25.7	25.4	0.247	0.264	0.188	0.201	59
								25	12	24.7	24.4	0.193	0.209	0.146	0.158	
					Right Tilt	23230	782.0	1	25	25.7	25.4	0.118	0.126	0.093	0.099	
								25	12	24.7	24.4	0.092	0.100	0.072	0.078	
	Body & Hotspot	QPSK	Mode B	5	Rear	23230	782.0	1	25	25.7	25.4	0.591	0.632	0.345	0.369	60
								25	12	24.7	24.4	0.519	0.563	0.302	0.327	
					Front	23230	782.0	1	25	25.7	25.4	0.347	0.371	0.209	0.223	
								25	12	24.7	24.4	0.280	0.303	0.170	0.184	
					Edge 2	23230	782.0	1	25	25.7	25.4	0.830	0.887	0.530	0.567	61
								25	12	24.7	24.4	0.723	0.784	0.467	0.506	
	Hotspot	QPSK	Mode B	5	Edge 3	23230	782.0	1	25	25.7	25.4	0.391	0.418	0.171	0.183	
								25	12	24.7	24.4	0.262	0.284	0.119	0.129	
					Edge 4	23230	782.0	1	25	25.7	25.4	0.445	0.476	0.284	0.304	
								25	12	24.7	24.4	0.332	0.360	0.211	0.229	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	23230	782.0	1	25	24.5	23.6	0.579	0.709	0.418	0.512	
								25	12	23.7	23.1	0.479	0.550	0.345	0.396	
					Left Tilt	23230	782.0	1	25	24.5	23.6	0.591	0.724	0.328	0.402	
								25	12	23.7	23.1	0.487	0.559	0.268	0.308	
					Right Touch	23230	782.0	1	25	24.5	23.6	0.752	0.921	0.489	0.599	62
								25	12	23.7	23.1	0.611	0.702	0.403	0.463	
					Right Tilt	23230	782.0	1	25	24.5	23.6	0.559	0.685	0.320	0.392	
								25	12	23.7	23.1	0.462	0.530	0.263	0.302	
	Body & Hotspot	QPSK	Mode B	5	Rear	23230	782.0	1	25	24.7	23.7	0.658	0.838	0.395	0.503	63
								25	12	23.7	23.1	0.520	0.597	0.311	0.357	
					Front	23230	782.0	1	25	24.7	23.7	0.313	0.399	0.202	0.257	
								25	12	23.7	23.1	0.245	0.281	0.164	0.188	
					Edge 1	23230	782.0	1	25	24.7	23.7	0.221	0.281	0.112	0.143	
								25	12	23.7	23.1	0.176	0.202	0.089	0.102	
	Hotspot	QPSK	Mode B	5	Edge 2	23230	782.0	1	25	24.7	23.7	0.179	0.228	0.117	0.149	
								25	12	23.7	23.1	0.141	0.162	0.091	0.105	
					Edge 4	23230	782.0	1	25	24.7	23.7	0.280	0.357	0.183	0.233	
								25	12	23.7	23.1	0.217	0.249	0.142	0.163	

10.10. LTE Band 14 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	23330	793.0	1	25	25.7	25.2	0.184	0.205	0.141	0.157	
								25	12	24.7	24.3	0.150	0.166	0.115	0.127	
					Left Tilt	23330	793.0	1	25	25.7	25.2	0.118	0.131	0.091	0.101	
								25	12	24.7	24.3	0.094	0.104	0.074	0.082	
					Right Touch	23330	793.0	1	25	25.7	25.2	0.247	0.275	0.192	0.213	64
								25	12	24.7	24.3	0.196	0.216	0.152	0.168	
					Right Tilt	23330	793.0	1	25	25.7	25.2	0.181	0.201	0.143	0.159	
								25	12	24.7	24.3	0.139	0.153	0.110	0.121	
	Body & Hotspot	QPSK	Mode B	5	Rear	23330	793.0	1	25	25.7	25.2	0.628	0.698	0.371	0.412	65
								25	12	24.7	24.3	0.505	0.558	0.298	0.329	
					Front	23330	793.0	1	25	25.7	25.2	0.272	0.302	0.169	0.188	
								25	12	24.7	24.3	0.189	0.209	0.122	0.135	
					Edge 2	23330	793.0	1	25	25.7	25.2	0.676	0.752	0.435	0.484	66
								25	12	24.7	24.3	0.558	0.616	0.358	0.395	
	Hotspot	QPSK	Mode B	5	Edge 3	23330	793.0	1	25	25.7	25.2	0.280	0.311	0.126	0.140	
								25	12	24.7	24.3	0.228	0.252	0.101	0.112	
					Edge 4	23330	793.0	1	25	25.7	25.2	0.241	0.268	0.153	0.170	
								25	12	24.7	24.3	0.185	0.204	0.118	0.130	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	23330	793.0	1	25	24.5	23.5	0.536	0.670	0.326	0.408	
								25	12	23.7	23.6	0.456	0.472	0.277	0.287	
					Left Tilt	23330	793.0	1	25	24.5	23.5	0.452	0.565	0.262	0.328	
								25	12	23.7	23.6	0.384	0.397	0.221	0.229	
					Right Touch	23330	793.0	1	25	24.5	23.5	0.704	0.880	0.450	0.563	67
								25	12	23.7	23.6	0.597	0.618	0.380	0.393	
					Right Tilt	23330	793.0	1	25	24.5	23.5	0.498	0.623	0.284	0.355	
								25	12	23.7	23.6	0.415	0.430	0.237	0.245	
	Body & Hotspot	QPSK	Mode B	5	Rear	23330	793.0	1	25	24.7	23.5	0.634	0.834	0.377	0.496	68
								25	12	23.7	23.6	0.536	0.555	0.318	0.329	
					Front	23330	793.0	1	25	24.7	23.5	0.264	0.347	0.179	0.235	
								25	12	23.7	23.6	0.244	0.253	0.160	0.166	
					Edge 1	23330	793.0	1	25	24.7	23.5	0.180	0.237	0.088	0.116	
								25	12	23.7	23.6	0.154	0.159	0.076	0.079	
	Hotspot	QPSK	Mode B	5	Edge 2	23330	793.0	1	25	24.7	23.5	0.278	0.366	0.180	0.237	
								25	12	23.7	23.6	0.237	0.245	0.154	0.159	
					Edge 4	23330	793.0	1	25	24.7	23.5	0.322	0.424	0.209	0.275	
								25	12	23.7	23.6	0.276	0.286	0.179	0.185	

10.11. LTE Band 25 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	26365	1882.5	1	49	25.7	25.3	0.187	0.205	0.119	0.130	
								50	24	24.7	24.4	0.155	0.166	0.099	0.106	
					Left Tilt	26365	1882.5	1	49	25.7	25.3	0.133	0.146	0.081	0.089	
								50	24	24.7	24.4	0.104	0.111	0.064	0.068	
					Right Touch	26365	1882.5	1	49	25.7	25.3	0.467	0.512	0.284	0.311	69
								50	24	24.7	24.4	0.324	0.347	0.200	0.214	
					Right Tilt	26365	1882.5	1	49	25.7	25.3	0.119	0.130	0.077	0.084	
								50	24	24.7	24.4	0.096	0.103	0.062	0.066	
	Body & Hotspot	QPSK	Mode B	5	Rear	26365	1882.5	1	49	19.0	18.5	0.435	0.488	0.216	0.242	
								50	24	19.0	18.5	0.437	0.493	0.216	0.243	
					Front	26365	1882.5	1	49	19.0	18.5	0.278	0.312	0.146	0.164	
								50	24	19.0	18.5	0.279	0.314	0.147	0.166	
	Hotspot	QPSK	Mode B	5	Edge 2	26365	1882.5	1	49	19.0	18.5	0.310	0.348	0.148	0.166	
								50	24	19.0	18.5	0.312	0.352	0.148	0.167	
					Edge 3	26140	1860.0	1	49	19.0	18.5	0.777	0.878	0.360	0.407	
								50	24	19.0	18.5	0.798	0.887	0.368	0.409	
						26365	1882.5	1	49	19.0	18.5	0.783	0.879	0.351	0.394	
								50	24	19.0	18.5	0.736	0.830	0.342	0.386	
						26590	1905.0	100	0	19.0	18.5	0.763	0.856	0.349	0.392	
								1	49	19.0	18.5	0.766	0.865	0.350	0.395	
					Edge 4	26365	1882.5	50	24	19.0	18.5	0.692	0.769	0.323	0.359	
								1	49	19.0	18.5	0.018	0.020	0.011	0.012	
								50	24	19.0	18.5	0.019	0.021	0.010	0.011	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	26365	1882.5	1	49	21.5	20.9	0.214	0.246	0.138	0.158	
								50	24	21.5	20.9	0.216	0.248	0.138	0.158	
					Left Tilt	26365	1882.5	1	49	21.5	20.9	0.164	0.188	0.093	0.107	
								50	24	21.5	20.9	0.165	0.189	0.093	0.107	
					Right Touch	26140	1860.0	1	49	21.5	20.8	0.733	0.853	0.414	0.482	
								50	24	21.5	20.9	0.761	0.884	0.430	0.499	
						26365	1882.5	1	49	21.5	20.9	0.795	0.913	0.441	0.506	72
								50	24	21.5	20.9	0.735	0.844	0.413	0.474	
						26590	1905.0	100	0	21.5	20.8	0.763	0.896	0.431	0.506	
								1	49	21.5	20.7	0.734	0.882	0.422	0.507	
					Right Tilt	26365	1882.5	50	24	21.5	20.7	0.728	0.875	0.414	0.498	
								1	49	21.5	20.9	0.523	0.600	0.257	0.295	
	Body & Hotspot	QPSK	Mode B	5	Rear	26140	1860.0	50	24	21.5	20.9	0.533	0.612	0.261	0.300	
								1	49	21.7	21.1	0.787	0.897	0.360	0.410	
						26365	1882.5	50	24	21.7	21.2	0.799	0.905	0.365	0.413	
								1	49	21.7	21.2	0.773	0.865	0.357	0.400	
					26590	1905.0		50	24	21.7	21.2	0.792	0.893	0.366	0.413	
								100	0	21.7	21.2	0.790	0.895	0.364	0.412	
					Front	26365	1882.5	1	49	21.7	21.1	0.780	0.894	0.365	0.418	73
								50	24	21.7	21.0	0.784	0.915	0.365	0.426	
	Hotspot	QPSK	Mode B	5	Edge 1	26365	1882.5	1	49	21.7	21.2	0.330	0.369	0.168	0.188	
								50	24	21.7	21.2	0.335	0.378	0.170	0.192	
					Edge 2	26365	1882.5	1	49	21.7	21.2	0.413	0.462	0.175	0.196	
								50	24	21.7	21.2	0.420	0.473	0.184	0.207	
					Edge 3	26365	1882.5	1	49	21.7	21.2	0.014	0.016	0.008	0.009	
								50	24	21.7	21.2	0.013	0.015	0.008	0.009	
					Edge 4	26365	1882.5	1	49	21.7	21.2	0.642	0.719	0.308	0.345	
								50	24	21.7	21.2	0.656	0.739	0.315	0.355	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	QPSK	Mode A	0	Left Touch	26365	1882.5	1	49	24.8	24.4	0.274	0.304	0.176	0.195	74
								50	24	24.5	24.2	0.325	0.352	0.201	0.218	
					Left Tilt	26365	1882.5	1	49	24.8	24.4	0.177	0.196	0.110	0.122	
								50	24	24.5	24.2	0.151	0.164	0.096	0.104	
					Right Touch	26365	1882.5	1	49	24.8	24.4	0.163	0.181	0.100	0.111	
								50	24	24.5	24.2	0.179	0.194	0.111	0.120	
					Right Tilt	26365	1882.5	1	49	24.8	24.4	0.163	0.181	0.097	0.108	
								50	24	24.5	24.2	0.150	0.163	0.089	0.096	
	Body & Hotspot	QPSK	Mode B	5	Rear	26140	1860.0	1	49	20.8	20.4	0.722	0.801	0.396	0.439	
								50	24	20.8	20.5	0.700	0.757	0.378	0.409	
						26365	1882.5	1	49	20.8	20.4	0.733	0.804	0.428	0.469	
								50	24	20.8	20.5	0.787	0.851	0.433	0.468	
					26590	1905.0		100	0	20.8	20.4	0.786	0.858	0.432	0.472	
								1	49	20.8	20.3	0.822	0.933	0.455	0.516	
					Front	26365	1882.5	50	24	20.8	20.3	0.825	0.930	0.459	0.517	75
								1	49	20.8	20.4	0.385	0.422	0.225	0.247	
								50	24	20.8	20.5	0.384	0.415	0.223	0.241	
	Hotspot	QPSK	Mode B	5	Edge 3	26365	1882.5	1	49	20.8	20.4	0.230	0.252	0.108	0.118	
								50	24	20.8	20.5	0.229	0.248	0.107	0.116	
					Edge 4	26365	1882.5	1	49	20.8	20.4	0.721	0.791	0.376	0.412	
								50	24	20.8	20.5	0.718	0.776	0.365	0.395	
ANT4	Head	QPSK	Mode A	0	Left Touch	26140	1860.0	1	49	19.2	18.7	0.776	0.881	0.405	0.460	
								50	24	19.2	18.7	0.808	0.907	0.413	0.463	
						26365	1882.5	1	49	19.2	18.7	0.795	0.902	0.408	0.463	76
								50	24	19.2	18.7	0.813	0.906	0.417	0.465	
					26590	1905.0		100	0	19.2	18.7	0.802	0.900	0.413	0.463	
								1	49	19.2	18.6	0.791	0.902	0.409	0.466	
								50	24	19.2	18.7	0.794	0.887	0.409	0.457	
								1	49	19.2	18.7	0.470	0.533	0.230	0.261	
					Left Tilt	26365	1882.5	50	24	19.2	18.7	0.477	0.532	0.234	0.261	
								1	49	19.2	18.7	0.303	0.344	0.183	0.208	
					Right Touch	26365	1882.5	50	24	19.2	18.7	0.308	0.343	0.185	0.206	
								1	49	19.2	18.7	0.187	0.212	0.106	0.120	
					Right Tilt	26365	1882.5	50	24	19.2	18.7	0.183	0.204	0.108	0.120	
								1	49	19.8	19.6	0.741	0.776	0.386	0.404	77
	Body & Hotspot	QPSK	Mode B	5	Rear	26365	1882.5	50	24	19.8	19.6	0.734	0.765	0.384	0.400	
								1	49	19.8	19.6	0.412	0.431	0.223	0.234	
					Front	26365	1882.5	50	24	19.8	19.6	0.415	0.433	0.224	0.233	
								1	49	19.8	19.6	0.415	0.435	0.190	0.199	
	Hotspot	QPSK	Mode B	5	Edge 1	26365	1882.5	50	24	19.8	19.6	0.414	0.432	0.189	0.197	
								1	49	19.8	19.5	0.856	0.913	0.419	0.447	
					Edge 2	26140	1860.0	50	24	19.8	19.5	0.877	0.935	0.429	0.458	
								1	49	19.8	19.6	0.828	0.867	0.408	0.427	
						26365	1882.5	50	24	19.8	19.6	0.826	0.861	0.406	0.423	
								100	0	19.8	19.6	0.863	0.897	0.423	0.440	
					26590	1905.0		1	49	19.8	19.6	0.904	0.947	0.438	0.459	78
								50	24	19.8	19.6	0.903	0.946	0.438	0.459	
								1	49	19.8	19.6	0.903	0.946	0.438	0.459	
								50	24	19.8	19.6	0.903	0.946	0.438	0.459	

10.12. LTE Band 26 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	26865	831.5	1	25	25.7	25.4	0.182	0.197	0.140	0.152	
								25	12	24.7	24.3	0.151	0.165	0.116	0.127	
					Left Tilt	26865	831.5	1	25	25.7	25.4	0.116	0.126	0.090	0.098	
								25	12	24.7	24.3	0.093	0.102	0.072	0.079	
					Right Touch	26865	831.5	1	25	25.7	25.4	0.194	0.210	0.152	0.165	79
								25	12	24.7	24.3	0.154	0.168	0.120	0.131	
					Right Tilt	26865	831.5	1	25	25.7	25.4	0.109	0.118	0.085	0.092	
								25	12	24.7	24.3	0.088	0.096	0.068	0.074	
	Body & Hotspot	QPSK	Mode B	5	Rear	26865	831.5	1	25	24.5	24.3	0.526	0.551	0.289	0.303	80
								25	12	24.5	24.3	0.610	0.640	0.334	0.351	
					Front	26865	831.5	1	25	24.5	24.3	0.248	0.260	0.146	0.153	
								25	12	24.5	24.3	0.255	0.267	0.149	0.156	
	Hotspot	QPSK	Mode B	5	Edge 2	26865	831.5	1	25	24.5	24.3	0.520	0.545	0.332	0.348	
								25	12	24.5	24.3	0.526	0.551	0.335	0.351	
					Edge 3	26865	831.5	1	25	24.5	24.3	0.299	0.313	0.131	0.137	
								25	12	24.5	24.3	0.300	0.314	0.132	0.138	
					Edge 4	26865	831.5	1	25	24.5	24.3	0.173	0.181	0.110	0.115	
								25	12	24.5	24.3	0.182	0.191	0.115	0.120	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	26865	831.5	1	25	24.1	23.7	0.614	0.681	0.431	0.478	
								25	12	23.7	23.2	0.552	0.627	0.387	0.439	
					Left Tilt	26865	831.5	1	25	24.1	23.7	0.423	0.469	0.250	0.277	
								25	12	23.7	23.2	0.349	0.396	0.208	0.236	
					Right Touch	26865	831.5	1	25	24.1	23.7	0.623	0.691	0.416	0.461	81
								25	12	23.7	23.2	0.694	0.788	0.444	0.504	
					Right Tilt	26865	831.5	1	25	24.1	23.7	0.192	0.213	0.098	0.109	
								25	12	23.7	23.2	0.169	0.192	0.085	0.096	
	Body & Hotspot	QPSK	Mode B	5	Rear	26865	831.5	1	25	24.7	24.2	0.178	0.199	0.107	0.120	82
								25	12	23.7	23.2	0.141	0.160	0.085	0.096	
					Front	26865	831.5	1	25	24.7	24.2	0.119	0.133	0.074	0.083	
								25	12	23.7	23.2	0.095	0.108	0.059	0.067	
	Hotspot	QPSK	Mode B	5	Edge 1	26865	831.5	1	25	24.7	24.2	0.071	0.079	0.034	0.038	
								25	12	23.7	23.2	0.055	0.062	0.026	0.030	
					Edge 2	26865	831.5	1	25	24.7	24.2	0.063	0.070	0.040	0.045	
								25	12	23.7	23.2	0.049	0.056	0.031	0.035	
					Edge 4	26865	831.5	1	25	24.7	24.2	0.163	0.182	0.104	0.116	
								25	12	23.7	23.2	0.117	0.133	0.075	0.085	

10.13. LTE Band 30 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	27710	2310.0	1	25	25.6	25.3	0.206	0.221	0.121	0.130	
								25	12	24.7	24.5	0.170	0.179	0.100	0.105	
					Left Tilt	27710	2310.0	1	25	25.6	25.3	0.138	0.148	0.076	0.081	
								25	12	24.7	24.5	0.112	0.118	0.061	0.064	
					Right Touch	27710	2310.0	1	25	25.6	25.3	0.617	0.661	0.341	0.365	83
								25	12	24.7	24.5	0.487	0.512	0.267	0.281	
					Right Tilt	27710	2310.0	1	25	25.6	25.3	0.126	0.135	0.070	0.075	
								25	12	24.7	24.5	0.098	0.103	0.054	0.057	
	Body & Hotspot	QPSK	Mode B	5	Rear	27710	2310.0	1	25	20.2	19.8	0.575	0.629	0.258	0.282	
								25	12	20.2	19.8	0.628	0.682	0.279	0.303	
					Front	27710	2310.0	1	25	20.2	19.8	0.387	0.423	0.185	0.202	
								25	12	20.2	19.8	0.387	0.420	0.186	0.202	
					Edge 2	27710	2310.0	1	25	20.2	19.8	0.807	0.883	0.348	0.381	85
								25	12	20.2	19.8	0.865	0.940	0.361	0.392	
								50	0	20.2	19.8	0.812	0.890	0.346	0.379	
								1	25	20.2	19.8	0.412	0.451	0.169	0.185	
	Hotspot	QPSK	Mode B	5	Edge 3	27710	2310.0	25	12	20.2	19.8	0.411	0.447	0.168	0.183	
								1	25	20.2	19.8	0.039	0.043	0.021	0.023	
					Edge 4	27710	2310.0	1	25	20.2	19.8	0.039	0.043	0.021	0.023	
								25	12	20.2	19.8	0.040	0.043	0.021	0.023	
								1	25	20.2	19.8	0.040	0.043	0.021	0.023	
								25	12	20.2	19.8	0.040	0.043	0.021	0.023	
ANT2	Head	QPSK	Mode A	0	Left Touch	27710	2310.0	1	25	20.5	19.9	0.218	0.251	0.100	0.115	
								25	12	20.5	19.9	0.219	0.251	0.101	0.116	
					Left Tilt	27710	2310.0	1	25	20.5	19.9	0.250	0.288	0.108	0.125	
								25	12	20.5	19.9	0.253	0.290	0.108	0.124	
					Right Touch	27710	2310.0	1	25	20.5	19.9	0.741	0.855	0.334	0.385	86
								25	12	20.5	19.9	0.748	0.859	0.337	0.387	
					Right Tilt	27710	2310.0	50	0	20.5	19.9	0.743	0.859	0.334	0.386	
								1	25	20.5	19.9	0.709	0.818	0.287	0.331	
								25	12	20.5	19.9	0.707	0.812	0.286	0.328	
								50	0	20.5	19.9	0.640	0.740	0.258	0.298	
	Body & Hotspot	QPSK	Mode B	5	Rear	27710	2310.0	1	25	21.0	20.8	0.898	0.945	0.396	0.417	87
								25	12	21.0	20.8	0.912	0.948	0.401	0.417	
					Front	27710	2310.0	50	0	21.0	20.7	0.640	0.683	0.292	0.311	
								1	25	21.0	20.8	0.267	0.281	0.145	0.153	
								25	12	21.0	20.8	0.270	0.281	0.146	0.152	
								50	0	21.0	20.8	0.228	0.240	0.096	0.101	
	Hotspot	QPSK	Mode B	5	Edge 1	27710	2310.0	1	25	21.0	20.8	0.228	0.240	0.096	0.101	
								25	12	21.0	20.8	0.229	0.238	0.097	0.101	
					Edge 2	27710	2310.0	1	25	21.0	20.8	0.016	0.017	0.007	0.008	
								25	12	21.0	20.8	0.013	0.014	0.006	0.006	
					Edge 4	27710	2310.0	1	25	21.0	20.8	0.802	0.844	0.369	0.388	
								25	12	21.0	20.8	0.811	0.843	0.372	0.387	
								50	0	21.0	20.7	0.715	0.763	0.327	0.349	
								1	25	21.0	20.8	0.802	0.844	0.369	0.388	
ANT3	Head	QPSK	Mode A	0	Left Touch	27710	2310.0	1	25	23.6	23.1	0.583	0.654	0.315	0.353	88
								25	12	23.6	23.1	0.463	0.526	0.251	0.285	
					Left Tilt	27710	2310.0	1	25	23.6	23.1	0.227	0.255	0.128	0.144	
								25	12	23.6	23.1	0.182	0.207	0.102	0.116	
					Right Touch	27710	2310.0	1	25	23.6	23.1	0.303	0.340	0.176	0.197	
								25	12	23.6	23.1	0.203	0.230	0.118	0.134	
					Right Tilt	27710	2310.0	1	25	23.6	23.1	0.235	0.264	0.131	0.147	
								25	12	23.6	23.1	0.224	0.254	0.125	0.142	
	Body & Hotspot	QPSK	Mode B	5	Rear	27710	2310.0	1	25	19.3	18.8	0.533	0.605	0.272	0.309	89
								25	12	19.3	18.7	0.538	0.625	0.273	0.317	
					Front	27710	2310.0	1	25	19.3	18.8	0.448	0.508	0.218	0.247	
								25	12	19.3	18.7	0.458	0.532	0.222	0.258	
								1	25	19.3	18.8	0.117	0.133	0.058	0.066	
								25	12	19.3	18.7	0.118	0.137	0.059	0.069	
	Hotspot	QPSK	Mode B	5	Edge 3	27710	2310.0	1	25	19.3	18.8	0.768	0.872	0.345	0.392	90
								25	12	19.3	18.7	0.804	0.934	0.357	0.415	
					Edge 4	27710	2310.0	1	25	19.3	18.8	0.768	0.872	0.345	0.392	
								25	12	19.3	18.7	0.804	0.934	0.357	0.415	
								1	25	19.3	18.8	0.768	0.872	0.345	0.392	
								25	12	19.3	18.6	0.750	0.885	0.337	0.398	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	QPSK	Mode A	0	Left Touch	27710	2310.0	1	25	19.7	19.0	0.799	0.934	0.421	0.492	91
								25	12	19.7	19.1	0.794	0.916	0.418	0.482	
								50	0	19.7	19.0	0.786	0.917	0.414	0.483	
					Left Tilt	27710	2310.0	1	25	19.7	19.0	0.441	0.516	0.221	0.258	
								25	12	19.7	19.1	0.523	0.603	0.255	0.294	
								1	25	19.7	19.0	0.224	0.262	0.128	0.150	
					Right Touch	27710	2310.0	1	25	19.7	19.0	0.225	0.260	0.127	0.146	
								25	12	19.7	19.1	0.225	0.260	0.127	0.146	
								1	25	19.7	19.0	0.175	0.205	0.096	0.112	
	Body & Hotspot	QPSK	Mode B	5	Right Tilt	27710	2310.0	1	25	19.7	19.0	0.175	0.205	0.096	0.112	
								25	12	19.7	19.1	0.174	0.201	0.095	0.110	
								1	25	20.1	19.8	0.830	0.883	0.436	0.464	92
					Rear	27710	2310.0	25	12	20.1	19.8	0.791	0.846	0.418	0.447	
								50	0	20.1	19.8	0.797	0.858	0.422	0.454	
								1	25	20.1	19.8	0.319	0.339	0.178	0.189	
					Front	27710	2310.0	25	12	20.1	19.8	0.320	0.342	0.178	0.190	
								1	25	20.1	19.8	0.146	0.155	0.059	0.063	
								25	12	20.1	19.8	0.147	0.157	0.060	0.064	
	Hotspot	QPSK	Mode B	5	Edge 1	27710	2310.0	1	25	20.1	19.8	0.870	0.926	0.417	0.444	93
								25	12	20.1	19.8	0.768	0.821	0.365	0.390	
					Edge 2	27710	2310.0	1	25	20.1	19.8	0.768	0.827	0.364	0.392	
								25	12	20.1	19.8	0.768	0.827	0.364	0.392	
								50	0	20.1	19.8	0.768	0.827	0.364	0.392	

10.14. LTE Band 41 Power Class 3 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	40620	2593.0	1	49	25.7	25.4	0.138	0.150	0.075	0.081	
								50	24	24.7	24.5	0.112	0.119	0.062	0.066	
					Left Tilt	40620	2593.0	1	49	25.7	25.4	0.068	0.074	0.032	0.035	
								50	24	24.7	24.5	0.053	0.056	0.025	0.026	
					Right Touch	40620	2593.0	1	49	25.7	25.4	0.279	0.302	0.140	0.152	94
								50	24	24.7	24.5	0.238	0.252	0.118	0.125	
					Right Tilt	40620	2593.0	1	49	25.7	25.4	0.052	0.056	0.028	0.030	
								50	24	24.7	24.5	0.042	0.045	0.022	0.023	
	Body & Hotspot	QPSK	Mode B	5	Rear	40620	2593.0	1	49	22.4	22.4	0.663	0.663	0.266	0.266	95
								50	24	22.4	22.4	0.589	0.589	0.318	0.318	
					Front	40620	2593.0	1	49	22.4	22.4	0.562	0.562	0.220	0.220	
								50	24	22.4	22.4	0.572	0.572	0.224	0.224	
					Edge 2	40620	2593.0	1	49	22.4	22.4	0.758	0.758	0.325	0.325	
								50	24	22.4	22.4	0.775	0.775	0.333	0.333	
	Hotspot	QPSK	Mode B	5	Edge 3	39750	2506.0	1	49	22.4	22.3	0.921	0.938	0.349	0.355	96
								50	24	22.4	22.4	0.901	0.909	0.343	0.346	
						40185	2549.5	1	49	22.4	22.4	0.840	0.844	0.314	0.315	
								50	24	22.4	22.4	0.755	0.755	0.287	0.287	
						40620	2593.0	1	49	22.4	22.4	0.863	0.863	0.321	0.321	
								50	24	22.4	22.4	0.897	0.897	0.332	0.332	
					Edge 3	41055	2636.5	1	49	22.4	22.3	0.884	0.905	0.321	0.328	
								50	24	22.4	22.4	0.784	0.788	0.293	0.294	
						41490	2680.0	1	49	22.4	22.2	0.599	0.629	0.223	0.234	
								50	24	22.4	22.3	0.543	0.556	0.206	0.211	
					Edge 4	40620	2593.0	1	49	22.4	22.4	0.089	0.089	0.043	0.043	
								50	24	22.4	22.4	0.090	0.090	0.043	0.043	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	40620	2593.0	1	49	20.3	19.9	0.511	0.559	0.192	0.210	
								50	24	20.3	19.9	0.519	0.569	0.195	0.214	
					Left Tilt	40620	2593.0	1	49	20.3	19.9	0.684	0.748	0.246	0.269	
								50	24	20.3	19.9	0.700	0.768	0.249	0.273	
					Right Touch	39750	2506.0	1	49	20.3	19.8	0.725	0.813	0.280	0.314	
								50	24	20.3	19.9	0.728	0.804	0.281	0.310	
						40185	2549.5	1	49	20.3	19.8	0.668	0.743	0.256	0.285	
								50	24	20.3	19.9	0.671	0.734	0.248	0.271	
						40620	2593.0	1	49	20.3	19.9	0.781	0.854	0.299	0.327	
								50	24	20.3	19.9	0.799	0.876	0.305	0.334	
						41055	2636.5	1	49	20.3	19.9	0.716	0.787	0.271	0.298	
								50	24	20.3	19.9	0.738	0.819	0.280	0.311	
						41490	2680.0	1	49	20.3	19.7	0.667	0.766	0.258	0.296	
								50	24	20.3	19.8	0.677	0.760	0.263	0.295	
					Right Tilt	40620	2593.0	1	49	20.3	19.9	0.582	0.637	0.215	0.235	
								50	24	20.3	19.9	0.597	0.655	0.219	0.240	
	Body & Hotspot	QPSK	Mode B	5	Rear	40620	2593.0	1	49	20.8	20.3	0.659	0.738	0.255	0.285	
								50	24	20.8	20.3	0.673	0.760	0.259	0.293	
					Front	40620	2593.0	1	49	20.8	20.3	0.682	0.763	0.245	0.274	
								50	24	20.8	20.3	0.696	0.786	0.250	0.282	
					Edge 1	40620	2593.0	1	49	20.8	20.3	0.601	0.673	0.214	0.240	
								50	24	20.8	20.3	0.612	0.691	0.218	0.246	
	Hotspot	QPSK	Mode B	5	Edge 2	40620	2593.0	1	49	20.8	20.3	0.038	0.043	0.018	0.020	
								50	24	20.8	20.3	0.038	0.043	0.018	0.020	
					Edge 4	39750	2506.0	1	49	20.8	20.2	0.754	0.868	0.322	0.371	
								50	24	20.8	20.3	0.752	0.852	0.320	0.362	
						40185	2549.5	1	49	20.8	20.1	0.660	0.768	0.284	0.331	
								50	24	20.8	20.1	0.643	0.752	0.278	0.325	
						40620	2593.0	1	49	20.8	20.3	0.741	0.830	0.308	0.345	
								50	24	20.8	20.3	0.757	0.855	0.314	0.355	
						41055	2636.5	1	49	20.8	20.1	0.747	0.882	0.296	0.349	
								50	24	20.8	20.2	0.764	0.881	0.303	0.349	
					41490	2680.0		1	49	20.8	20.1	0.782	0.915	0.303	0.354	99
								50	24	20.8	20.2	0.609	0.699	0.245	0.281	

Antenna	RF Exposure Conditions	Mode	Pow er Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Pow er (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.				
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled					
ANT3	Head	QPSK	Mode A	0	Left Touch	40620	2593.0	1	49	25.7	25.3	0.599	0.657	0.317	0.348	100				
								50	24	24.7	24.4	0.525	0.569	0.273	0.296					
					Left Tilt	40620	2593.0	1	49	25.7	25.3	0.225	0.247	0.117	0.128					
								50	24	24.7	24.4	0.190	0.206	0.097	0.105					
					Right Touch	40620	2593.0	1	49	25.7	25.3	0.290	0.318	0.161	0.177					
								50	24	24.7	24.4	0.203	0.220	0.114	0.124					
					Right Tilt	40620	2593.0	1	49	25.7	25.3	0.270	0.296	0.142	0.156					
								50	24	24.7	24.4	0.244	0.264	0.125	0.135					
	Body & Hotspot	QPSK	Mode B	5	Rear	40620	2593.0	1	49	19.1	18.3	0.420	0.511	0.199	0.242	101				
								50	24	19.1	18.3	0.423	0.509	0.200	0.240					
					Front	40620	2593.0	1	49	19.1	18.3	0.309	0.376	0.145	0.176					
								50	24	19.1	18.3	0.310	0.373	0.146	0.176					
					Hotspot	QPSK	Mode B	5	Edge 3	40620	2593.0	1	49	19.1	18.3	0.100	0.122	0.045	0.055	
												50	24	19.1	18.3	0.102	0.123	0.045	0.054	
	Edge 4	39750	2506.0	1					49	19.1	18.2	0.706	0.867	0.304	0.373					
				50					24	19.1	18.3	0.715	0.864	0.309	0.373					
		40185	2549.5	1					49	19.1	18.1	0.718	0.900	0.309	0.387					
				50					24	19.1	18.1	0.752	0.942	0.323	0.405	102				
		40620	2593.0	1					49	19.1	18.3	0.661	0.804	0.282	0.343					
				50					24	19.1	18.3	0.677	0.814	0.289	0.347					
	100			0					19.1	18.3	0.638	0.767	0.271	0.326						
	1			49					19.1	18.0	0.554	0.714	0.235	0.303						
	41055	2636.5	50	24					19.1	18.1	0.569	0.716	0.240	0.302						
			1	49					19.1	18.0	0.492	0.641	0.207	0.270						
			50	24					19.1	18.0	0.533	0.685	0.224	0.288						

Antenna	RF Exposure Conditions	Mode	Pow er Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Pow er (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.	
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled		
ANT4	Head	QPSK	Mode A	0	Left Touch	40620	2593.0	1	49	21.0	20.7	0.641	0.685	0.334	0.357	103	
								50	24	21.0	20.7	0.651	0.698	0.339	0.363		
					Left Tilt	40620	2593.0	1	49	21.0	20.7	0.431	0.461	0.193	0.206		
								50	24	21.0	20.7	0.441	0.473	0.196	0.210		
					Right Touch	40620	2593.0	1	49	21.0	20.7	0.140	0.150	0.082	0.088		
								50	24	21.0	20.7	0.140	0.150	0.083	0.089		
					Right Tilt	40620	2593.0	1	49	21.0	20.7	0.051	0.055	0.026	0.028		
								50	24	21.0	20.7	0.052	0.056	0.026	0.028		
	Body & Hotspot	QPSK	Mode B	5	Rear	39750	2506.0	1	49	22.5	22.3	0.720	0.757	0.391	0.411		
								50	24	22.5	22.3	0.724	0.760	0.392	0.411		
						40185	2549.5	1	49	22.5	22.3	0.836	0.871	0.454	0.473		
								50	24	22.5	22.3	0.784	0.819	0.426	0.445		
						40620	2593.0	1	49	22.5	22.4	0.879	0.910	0.449	0.465	104	
								50	24	22.5	22.4	0.896	0.927	0.457	0.473		
					41055	2636.5	1	49	22.5	22.0	0.562	0.632	0.299	0.336			
							50	24	22.5	22.1	0.572	0.621	0.304	0.330			
							41490	2680.0	1	49	22.5	22.2	0.717	0.770		0.348	0.374
									50	24	22.5	22.2	0.851	0.916		0.405	0.436
							40620	2593.0	1	49	22.5	22.4	0.236	0.244		0.116	0.120
									50	24	22.5	22.4	0.236	0.244		0.115	0.119
	Hotspot	QPSK	Mode B	5	Edge 1	40620	2593.0	1	49	22.5	22.4	0.117	0.121	0.039	0.040		
								50	24	22.5	22.4	0.121	0.125	0.041	0.042		
					Edge 2	40620	2593.0	1	49	22.5	22.4	0.762	0.789	0.336	0.348		
								50	24	22.5	22.4	0.768	0.795	0.337	0.349		

UL CA 41C

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 1	Head	QPSK	Mode A	0	Right Touch	40521	2583.1	1	99	40719	2602.9	1	0	25.7	24.9	0.142	0.171	0.072	0.087	
	Body & Hotspot	QPSK	Mode B	5	Rear	40521	2583.1	1	99	40719	2602.9	1	0	22.4	21.6	0.244	0.293	0.116	0.139	
	Hotspot	QPSK	Mode B	5	Edge 3	39750	2506.0	1	99	39948	2525.8	1	0	22.4	21.4	0.276	0.347	0.101	0.127	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 2	Head	QPSK	Mode A	0	Right Touch	40521	2583.1	1	99	40719	2602.9	1	0	20.50	20.00	0.276	0.310	0.103	0.116	
	Body & Hotspot	QPSK	Mode B	5	Front	40521	2583.1	1	99	40719	2602.9	1	0	21.00	20.40	0.529	0.607	0.213	0.245	
	Hotspot	QPSK	Mode B	5	Edge 4	39750	2506.0	1	99	39948	2525.8	1	0	21.00	20.30	0.423	0.497	0.186	0.219	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 3	Head	QPSK	Mode A	0	Left Touch	40521	2583.1	1	99	40719	2602.9	1	0	25.70	25.30	0.213	0.234	0.111	0.122	
	Body & Hotspot	QPSK	Mode B	5	Rear	40521	2583.1	1	99	40719	2602.9	1	0	19.10	18.60	0.218	0.245	0.096	0.108	
	Hotspot	QPSK	Mode B	5	Edge 4	40521	2583.1	1	99	40719	2602.9	1	0	19.10	18.60	0.339	0.380	0.145	0.163	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 4	Head	QPSK	Mode A	0	Left Touch	40521	2583.1	1	99	40719	2602.9	1	0	21.00	20.20	0.381	0.458	0.181	0.218	
	Body & Hotspot	QPSK	Mode B	5	Rear	40521	2583.1	1	99	40719	2602.9	1	0	22.50	21.40	0.448	0.577	0.220	0.283	

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

Additional SAR for UL CA PC2 is not required. Test reduction has been applied based on standalone SAR.

10.15. LTE Band 41 Power Class 2 (20MHz Bandwidth)

According to Section 9.4, SAR evaluation for PC2 is only required when its Maximum output power (Tune-up Limit) is higher from PC3.

From May 2017 TCB Workshop, SAR tested were performed using Power Class 3. SAR test for Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination. According to the highest time averaged power for UL-DL configurations, configuration # 1 with duty cycle 43.3% is used for Power Class 2 SAR test.

Additional SAR testing for Power Class 2 is not required when:

- The reported SAR vs. output power can be linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg

Reported SAR vs. Output Power linearly scaled

Antenna	RF Exposure Conditions	Power Class 2			Power Class 3				PC2 linearly scaled Reported SAR (W/kg)	Linearly scaled (<10%)
		Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Reported 1-g SAR (W/kg)		
ANT1	Head	43.3%	28.70	320.99	63.3%	25.70	235.18	0.302	0.412	36.48%
ANT3	Head	43.3%	26.00	172.38	63.3%	25.70	235.18	0.657	0.482	-26.70%

Conclusion:

SAR test for Power Class 2 is required based on the reported SAR vs. output power linearly scaled >10%. Additional SAR testing for Power Class 2 is required.

Additional SAR testing for Power Class 2

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A (PC2)	0	Left Touch	40620	2593.0	1	49	28.7	28.3	0.164	0.179	0.091	0.099	320
									50	27.7	27.4	0.130	0.138	0.072	0.076	
					Left Tilt	40620	2593.0	1	49	28.7	28.3	0.093	0.102	0.046	0.050	
									50	27.7	27.4	0.073	0.077	0.035	0.038	
					Right Touch	40620	2593.0	1	49	28.7	28.3	0.410	0.447	0.208	0.227	
									50	27.7	27.4	0.333	0.354	0.168	0.178	
					Right Tilt	40620	2593.0	1	49	28.7	28.3	0.067	0.073	0.035	0.038	
									50	27.7	27.4	0.052	0.055	0.026	0.027	

UL CA 41C Power class 2

Antenna	RF Exposure Conditions	Power Class 2			Power Class 3				PC2 linearly scaled Reported SAR (W/kg)	Linearly scaled (<10%)
		Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Reported 1-g SAR (W/kg)		
ANT1	Head	43.3%	28.70	320.99	63.3%	25.70	235.18	0.171	0.233	36.48%

Conclusion:

SAR test for Power Class 2 is required based on the reported SAR vs. output power linearly scaled >10%. Additional SAR testing for Power Class 2 is required.

Additional SAR testing for Power Class 2

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 1	Head	QPSK	Mode A	0	Right Touch	40521	2583.1	1	99	40719	2602.9	1	0	28.7	28.3	0.167	0.183	0.088	0.096	

10.16. LTE Band 48 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT7	Head	QPSK	Mode A	0	Left Touch	56207	3646.7	1	49	25.4	25.0	0.081	0.089	0.028	0.031	
								50	24	25.0	24.2	0.055	0.066	0.018	0.022	
					Left Tilt	56207	3646.7	1	49	25.4	25.0	0.069	0.076	0.023	0.025	
								50	24	25.0	24.2	0.056	0.068	0.019	0.023	
					Right Touch	56207	3646.7	1	49	25.4	25.0	0.216	0.237	0.075	0.082	105
								50	24	25.0	24.2	0.161	0.194	0.056	0.067	
					Right Tilt	56207	3646.7	1	49	25.4	25.0	0.070	0.077	0.030	0.033	
								50	24	25.0	24.2	0.047	0.057	0.020	0.024	
	Body & Hotspot	QPSK	Mode B	5	Rear	56207	3646.7	1	49	22.1	21.8	0.586	0.631	0.235	0.253	106
								50	24	22.1	21.8	0.543	0.582	0.220	0.236	
					Front	56207	3646.7	1	49	22.1	21.8	0.365	0.393	0.151	0.163	
								50	24	22.1	21.8	0.386	0.414	0.159	0.170	
	Hotspot	QPSK	Mode B	5	Edge 2	55340	3560.0	1	49	22.1	21.8	0.861	0.916	0.332	0.353	
								50	24	22.1	21.9	0.879	0.925	0.338	0.356	
						55773	3603.3	1	49	22.1	21.8	0.848	0.904	0.330	0.352	
								50	24	22.1	21.9	0.859	0.904	0.336	0.353	
					56207	3646.7		1	49	22.1	21.8	0.834	0.898	0.328	0.353	
								50	24	22.1	21.8	0.856	0.917	0.327	0.350	
						56640	3690.0	1	49	22.1	21.8	0.857	0.897	0.337	0.353	
								50	24	22.1	21.9	0.769	0.805	0.306	0.320	
					Edge 3	56207	3646.7	1	49	22.1	21.8	0.479	0.516	0.166	0.179	
								50	24	22.1	21.8	0.490	0.525	0.169	0.181	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT8	Head	QPSK	Mode A	0	Left Touch	56207	3646.7	1	49	22.5	21.6	0.290	0.356	0.090	0.110	
								50	24	22.5	21.7	0.274	0.329	0.087	0.105	
					Left Tilt	56207	3646.7	1	49	22.5	21.6	0.365	0.448	0.104	0.128	
								50	24	22.5	21.7	0.374	0.449	0.105	0.126	
					Right Touch	55340	3560.0	1	49	22.5	21.5	0.425	0.531	0.139	0.174	
								50	24	22.5	21.5	0.424	0.533	0.137	0.172	
						55773	3603.3	1	49	22.5	21.6	0.594	0.738	0.190	0.236	
								50	24	22.5	21.7	0.606	0.734	0.193	0.234	
						56207	3646.7	1	49	22.5	21.6	0.692	0.849	0.221	0.271	
								50	24	22.5	21.7	0.693	0.831	0.219	0.263	
						56640	3690.0	100	0	22.5	21.7	0.698	0.839	0.221	0.266	108
								1	49	22.5	21.5	0.754	0.943	0.242	0.303	
					Right Tilt	56207	3646.7	50	24	22.5	21.6	0.754	0.936	0.243	0.302	
								1	49	22.5	21.6	0.355	0.436	0.105	0.129	
						56207	3646.7	50	24	22.5	21.7	0.354	0.425	0.102	0.122	
								1	49	22.5	21.7	0.354	0.425	0.102	0.122	
	Body & Hotspot	QPSK	Mode B	5	Rear	55340	3560.0	1	49	23.0	22.0	0.599	0.763	0.209	0.266	
								50	24	23.0	22.0	0.618	0.776	0.216	0.271	
						55773	3603.3	1	49	23.0	22.1	0.684	0.840	0.244	0.299	
								50	24	23.0	22.2	0.699	0.837	0.249	0.298	
						56207	3646.7	1	49	23.0	22.2	0.722	0.878	0.267	0.325	
								50	24	23.0	22.2	0.736	0.891	0.269	0.326	
					56640	3690.0		100	0	23.0	22.2	0.722	0.868	0.266	0.320	
								1	49	23.0	22.1	0.721	0.887	0.274	0.337	
						56207	3646.7	50	24	23.0	22.1	0.714	0.878	0.272	0.335	
								1	49	23.0	22.2	0.139	0.169	0.044	0.054	
					Front	56207	3646.7	50	24	23.0	22.2	0.161	0.195	0.055	0.067	
	Hotspot	QPSK	Mode B	5	Edge 1	56207	3646.7	1	49	23.0	22.2	0.209	0.254	0.070	0.085	
								50	24	23.0	22.2	0.212	0.257	0.071	0.086	
					Edge 4	56207	3646.7	1	49	23.0	22.2	0.420	0.511	0.144	0.175	
								50	24	23.0	22.2	0.434	0.525	0.150	0.182	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT9	Head	QPSK	Mode A	0	Left Touch	56207	3646.7	1	49	24.3	23.7	0.158	0.181	0.066	0.075	110
								50	24	24.3	23.7	0.117	0.134	0.047	0.054	
					Left Tilt	56207	3646.7	1	49	24.3	23.7	0.030	0.034	0.011	0.012	
								50	24	24.3	23.7	0.023	0.027	0.008	0.009	
					Right Touch	56207	3646.7	1	49	24.3	23.7	0.113	0.129	0.041	0.047	
								50	24	24.3	23.7	0.085	0.098	0.030	0.034	
					Right Tilt	56207	3646.7	1	49	24.3	23.7	0.067	0.076	0.022	0.025	
								50	24	24.3	23.7	0.052	0.059	0.017	0.020	
	Body & Hotspot	QPSK	Mode B	5	Rear	56207	3646.7	1	49	21.6	21.2	0.456	0.505	0.170	0.188	
								50	24	21.6	21.2	0.464	0.506	0.172	0.188	
					Front	56207	3646.7	1	49	21.6	21.2	0.583	0.645	0.252	0.279	111
								50	24	21.6	21.2	0.517	0.564	0.223	0.243	
	Hotspot	QPSK	Mode B	5	Edge 3	56207	3646.7	1	49	21.6	21.2	0.277	0.307	0.117	0.129	
								50	24	21.6	21.2	0.277	0.302	0.116	0.127	
					Edge 4	55340	3560.0	1	49	21.6	21.2	0.850	0.941	0.301	0.333	
								50	24	21.6	21.2	0.870	0.945	0.307	0.334	
						55773	3603.3	1	49	21.6	21.2	0.751	0.833	0.263	0.292	
								50	24	21.6	21.1	0.772	0.876	0.269	0.305	
						56207	3646.7	1	49	21.6	21.2	0.726	0.803	0.259	0.287	
								50	24	21.6	21.2	0.733	0.800	0.260	0.284	
						56640	3690.0	100	0	21.6	21.2	0.730	0.795	0.258	0.281	
								1	49	21.6	21.1	0.649	0.723	0.233	0.260	
								50	24	21.6	21.1	0.667	0.748	0.235	0.264	
ANT4	Head	QPSK	Mode A	0	Left Touch	56207	3646.7	1	49	21.8	21.1	0.576	0.677	0.211	0.248	113
								50	24	21.8	21.2	0.576	0.664	0.213	0.246	
					Left Tilt	56207	3646.7	1	49	21.8	21.1	0.266	0.313	0.105	0.123	
								50	24	21.8	21.2	0.265	0.306	0.104	0.120	
					Right Touch	56207	3646.7	1	49	21.8	21.1	0.167	0.196	0.063	0.074	
								50	24	21.8	21.2	0.167	0.193	0.062	0.072	
					Right Tilt	56207	3646.7	1	49	21.8	21.1	0.111	0.130	0.037	0.044	
								50	24	21.8	21.2	0.111	0.128	0.036	0.042	
	Body & Hotspot	QPSK	Mode B	5	Rear	56207	3646.7	1	49	23.0	22.3	0.639	0.749	0.268	0.314	114
								50	24	23.0	22.5	0.653	0.739	0.272	0.308	
					Front	56207	3646.7	1	49	23.0	22.3	0.277	0.325	0.109	0.128	
								50	24	23.0	22.5	0.278	0.315	0.110	0.125	
	Hotspot	QPSK	Mode B	5	Edge 1	56207	3646.7	1	49	23.0	22.3	0.093	0.109	0.036	0.042	
								50	24	23.0	22.5	0.079	0.089	0.032	0.036	
					Edge 2	55340	3560.0	1	49	23.0	22.3	0.780	0.927	0.280	0.333	
								50	24	23.0	22.4	0.785	0.895	0.282	0.322	
						55773	3603.3	1	49	23.0	22.3	0.750	0.883	0.264	0.311	
								50	24	23.0	22.4	0.768	0.882	0.269	0.309	
						56207	3646.7	1	49	23.0	22.3	0.806	0.945	0.278	0.326	115
								50	24	23.0	22.5	0.733	0.830	0.254	0.288	
						56640	3690.0	100	0	23.0	22.5	0.738	0.836	0.257	0.291	
								1	49	23.0	22.3	0.620	0.735	0.216	0.256	
								50	24	23.0	22.5	0.688	0.781	0.238	0.270	

UL CA 48C

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 7	Head	QPSK	Mode A	0	Right Touch	55891	3615.1	1	99	56089	3634.9	1	0	25.0	24.6	0.149	0.163	0.057	0.062	
	Body & Hotspot	QPSK	Mode B	5	Rear	55891	3615.1	1	99	56089	3634.9	1	0	22.1	21.9	0.457	0.479	0.176	0.184	
	Hotspot	QPSK	Mode B	5	Edge 2	55340	3560.0	1	99	55538	3579.8	1	0	22.1	21.8	0.618	0.662	0.237	0.254	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 8	Head	QPSK	Mode A	0	Right Touch	56442	3670.2	1	99	56640	3690.0	1	0	22.50	21.60	0.341	0.420	0.108	0.133	
	Body & Hotspot	QPSK	Mode B	5	Rear	55891	3615.1	1	99	56089	3634.9	1	0	23.00	22.00	0.341	0.429	0.123	0.155	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 9	Head	QPSK	Mode A	0	Left Touch	55891	3615.1	1	99	56089	3634.9	1	0	24.30	23.40	0.116	0.143	0.053	0.065	
	Body & Hotspot	QPSK	Mode B	5	Front	55891	3615.1	1	99	56089	3634.9	1	0	21.60	21.20	0.417	0.457	0.179	0.196	
	Hotspot	QPSK	Mode B	5	Edge 4	55340	3560.0	1	99	55538	3579.8	1	0	21.60	20.60	0.506	0.637	0.179	0.225	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	PCC UL				SCC UL				Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
						Ch #.	Freq. (MHz)	RB Allocation	RB offset	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 4	Head	QPSK	Mode A	0	Left Touch	55891	3615.1	1	99	56089	3634.9	1	0	21.80	20.20	0.348	0.503	0.141	0.204	
	Body & Hotspot	QPSK	Mode B	5	Rear	55891	3615.1	1	99	56089	3634.9	1	0	23.00	21.60	0.236	0.326	0.099	0.136	
	Hotspot	QPSK	Mode B	5	Edge 2	55891	3615.1	1	99	56089	3634.9	1	0	23.00	21.60	0.524	0.723	0.184	0.254	

Note(s):

PCC RB allocation setting for UL CA has been adjusted based on the worst-case power.

10.17. LTE Band 53 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	60197	2489.2	1	25	20.7	20.3	0.056	0.062	0.032	0.035	
								25	12	20.7	20.2	0.057	0.064	0.033	0.037	
					Left Tilt	60197	2489.2	1	25	20.7	20.3	0.037	0.041	0.020	0.022	
								25	12	20.7	20.2	0.037	0.042	0.019	0.021	
					Right Touch	60197	2489.2	1	25	20.7	20.3	0.117	0.130	0.063	0.070	
								25	12	20.7	20.2	0.122	0.137	0.066	0.074	116
					Right Tilt	60197	2489.2	1	25	20.7	20.3	0.018	0.020	0.009	0.010	
								25	12	20.7	20.2	0.020	0.022	0.011	0.012	
	Body & Hotspot	QPSK	Mode B	5	Rear	60197	2489.2	1	25	20.7	20.3	0.503	0.558	0.211	0.234	
								25	12	20.7	20.2	0.511	0.573	0.214	0.240	117
					Front	60197	2489.2	1	25	20.7	20.3	0.377	0.418	0.158	0.175	
								25	12	20.7	20.2	0.385	0.432	0.162	0.182	
					Edge 2	60197	2489.2	1	25	20.7	20.3	0.523	0.580	0.229	0.254	
								25	12	20.7	20.2	0.502	0.563	0.221	0.248	
	Hotspot	QPSK	Mode B	5	Edge 3	60197	2489.2	1	25	20.7	20.3	0.649	0.720	0.256	0.284	
								25	12	20.7	20.2	0.654	0.734	0.257	0.288	118
					Edge 4	60197	2489.2	1	25	20.7	20.3	0.068	0.075	0.035	0.039	
								25	12	20.7	20.2	0.064	0.072	0.034	0.038	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	60197	2489.2	1	25	20.7	20.5	0.554	0.581	0.217	0.228	
								25	12	20.7	20.6	0.545	0.562	0.210	0.216	
					Left Tilt	60197	2489.2	1	25	20.7	20.5	0.589	0.618	0.225	0.236	
								25	12	20.7	20.6	0.599	0.617	0.228	0.235	
					Right Touch	60197	2489.2	1	25	20.7	20.5	0.841	0.883	0.330	0.346	
								25	12	20.7	20.6	0.868	0.894	0.340	0.350	119
					Right Tilt	60197	2489.2	50	0	20.7	20.5	0.864	0.901	0.339	0.353	
								1	25	20.7	20.5	0.599	0.629	0.225	0.236	
	Body & Hotspot	QPSK	Mode B	5	Rear	60197	2489.2	25	12	20.7	20.6	0.613	0.632	0.230	0.237	
								1	25	20.7	20.5	0.640	0.672	0.275	0.289	
					Front	60197	2489.2	25	12	20.7	20.6	0.654	0.674	0.281	0.290	120
								1	25	20.7	20.5	0.360	0.378	0.158	0.166	
					Edge 2	60197	2489.2	25	12	20.7	20.6	0.366	0.377	0.161	0.166	
								1	25	20.7	20.5	0.446	0.468	0.177	0.186	
	Hotspot	QPSK	Mode B	5	Edge 3	60197	2489.2	25	12	20.7	20.6	0.464	0.478	0.184	0.190	
								1	25	20.7	20.5	0.030	0.031	0.017	0.018	
					Edge 4	60197	2489.2	25	12	20.7	20.6	0.031	0.032	0.017	0.018	
								1	25	20.7	20.5	0.785	0.824	0.345	0.362	
					Edge 4	60197	2489.2	25	12	20.7	20.6	0.816	0.841	0.356	0.367	
								50	0	20.7	20.5	0.821	0.856	0.358	0.373	121

10.18. LTE Band 66 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	132322	1745.0	1	49	24.8	24.4	0.086	0.095	0.058	0.064	
								50	24	24.7	23.6	0.071	0.091	0.048	0.062	
					Left Tilt	132322	1745.0	1	49	24.8	24.4	0.057	0.063	0.034	0.038	
								50	24	24.7	23.6	0.051	0.065	0.030	0.038	
					Right Touch	132322	1745.0	1	49	24.8	24.4	0.200	0.222	0.127	0.141	122
								50	24	24.7	23.6	0.099	0.127	0.064	0.082	
					Right Tilt	132322	1745.0	1	49	24.8	24.4	0.066	0.073	0.043	0.048	
								50	24	24.7	23.6	0.045	0.058	0.030	0.038	
	Body & Hotspot	QPSK	Mode B	5	Rear	132322	1745.0	1	49	18.1	17.9	0.571	0.605	0.283	0.300	123
								50	24	18.1	17.9	0.574	0.608	0.282	0.299	
					Front	132322	1745.0	1	49	18.1	17.9	0.461	0.488	0.221	0.234	
								50	24	18.1	17.9	0.461	0.488	0.221	0.234	
	Hotspot	QPSK	Mode B	5	Edge 2	132322	1745.0	1	49	18.1	17.9	0.097	0.103	0.047	0.050	
								50	24	18.1	17.9	0.097	0.102	0.046	0.049	
					Edge 3	132072	1720.0	1	49	18.1	17.9	0.779	0.819	0.362	0.381	
								50	24	18.1	17.9	0.793	0.828	0.365	0.381	
						132322	1745.0	1	49	18.1	17.9	0.825	0.874	0.382	0.405	
								50	24	18.1	17.9	0.818	0.866	0.377	0.399	
						132572	1770.0	100	0	18.1	17.8	0.817	0.873	0.377	0.403	
								1	49	18.1	17.7	0.855	0.929	0.396	0.430	
					Edge 4	132572	1770.0	50	24	18.1	17.7	0.848	0.934	0.393	0.433	124
								1	49	18.1	17.9	0.011	0.011	0.005	0.006	
						132322	1745.0	50	24	18.1	17.9	0.010	0.010	0.005	0.005	
								1	49	18.1	17.9	0.011	0.011	0.005	0.006	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	132322	1745.0	1	49	21.0	20.9	0.244	0.250	0.124	0.127	
								50	24	21.0	20.9	0.243	0.250	0.124	0.128	
					Left Tilt	132322	1745.0	1	49	21.0	20.9	0.275	0.281	0.135	0.138	
								50	24	21.0	20.9	0.278	0.286	0.141	0.145	
					Right Touch	132072	1720.0	1	49	21.0	20.9	0.915	0.936	0.464	0.475	125
								50	24	21.0	20.9	0.919	0.940	0.464	0.475	
						132322	1745.0	1	49	21.0	20.9	0.853	0.873	0.439	0.449	
								50	24	21.0	20.9	0.889	0.916	0.449	0.463	
						132572	1770.0	100	0	21.0	20.9	0.886	0.915	0.449	0.464	
								1	49	21.0	20.7	0.843	0.895	0.438	0.465	
					Right Tilt	132572	1770.0	50	24	21.0	20.8	0.850	0.890	0.439	0.460	
								1	49	21.0	20.9	0.695	0.711	0.334	0.342	
						132322	1745.0	50	24	21.0	20.9	0.642	0.662	0.299	0.308	
								1	49	21.3	21.3	0.943	0.947	0.449	0.451	
	Body & Hotspot	QPSK	Mode B	5	Rear	132072	1720.0	50	24	21.3	21.3	0.944	0.948	0.449	0.451	126
								1	49	21.3	21.3	0.888	0.892	0.416	0.418	
						132322	1745.0	50	24	21.3	21.3	0.891	0.895	0.416	0.418	
								100	0	21.3	21.2	0.881	0.912	0.393	0.407	
					Front	132572	1770.0	1	49	21.3	21.2	0.829	0.858	0.386	0.400	
								50	24	21.3	21.1	0.826	0.857	0.384	0.398	
						132322	1745.0	1	49	21.3	21.3	0.364	0.366	0.180	0.181	
								50	24	21.3	21.3	0.383	0.385	0.190	0.191	
	Hotspot	QPSK	Mode B	5	Edge 1	132322	1745.0	1	49	21.3	21.3	0.600	0.603	0.277	0.278	
								50	24	21.3	21.3	0.620	0.623	0.285	0.286	
					Edge 2	132322	1745.0	1	49	21.3	21.3	0.007	0.007	0.002	0.002	
								50	24	21.3	21.3	0.004	0.004	0.001	0.001	
					Edge 4	132322	1745.0	1	49	21.3	21.3	0.319	0.320	0.165	0.166	
								50	24	21.3	21.3	0.317	0.318	0.164	0.165	
						132322	1745.0	1	49	21.3	21.3	0.317	0.318	0.164	0.165	
								50	24	21.3	21.3	0.317	0.318	0.164	0.165	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	QPSK	Mode A	0	Left Touch	132322	1745.0	1	49	25.5	25.2	0.331	0.359	0.209	0.227	127
								50	24	24.5	24.2	0.261	0.283	0.165	0.179	
					Left Tilt	132322	1745.0	1	49	25.5	25.2	0.182	0.197	0.119	0.129	
								50	24	24.5	24.2	0.142	0.154	0.092	0.100	
					Right Touch	132322	1745.0	1	49	25.5	25.2	0.162	0.176	0.104	0.113	
								50	24	24.5	24.2	0.129	0.140	0.083	0.090	
	Body & Hotspot	QPSK	Mode B	5	Rear	132072	1720.0	1	49	21.5	21.1	0.803	0.880	0.423	0.464	
								50	24	21.5	21.1	0.810	0.882	0.424	0.462	
						132322	1745.0	1	49	21.5	21.2	0.829	0.897	0.435	0.470	128
								50	24	21.5	21.2	0.827	0.896	0.434	0.470	
								100	0	21.5	21.0	0.823	0.915	0.431	0.479	
								1	49	21.5	21.1	0.816	0.895	0.437	0.479	
					Front	132572	1770.0	50	24	21.5	21.1	0.803	0.878	0.430	0.470	
								1	49	21.5	21.2	0.411	0.444	0.236	0.255	
						132322	1745.0	50	24	21.5	21.2	0.411	0.445	0.237	0.257	
								1	49	21.5	21.2	0.138	0.149	0.059	0.063	
	Hotspot	QPSK	Mode B	5	Edge 3	132322	1745.0	50	24	21.5	21.2	0.139	0.151	0.059	0.064	
								1	49	21.5	21.2	0.619	0.669	0.330	0.357	
					Edge 4	132322	1745.0	50	24	21.5	21.2	0.623	0.675	0.331	0.359	
ANT4	Head	QPSK	Mode A	0	Left Touch	132072	1720.0	1	49	19.1	18.5	0.743	0.859	0.383	0.443	
								50	24	19.1	18.5	0.746	0.860	0.385	0.444	
						132322	1745.0	1	49	19.1	18.5	0.786	0.900	0.407	0.466	
								50	24	19.1	18.5	0.788	0.899	0.406	0.463	
								100	0	19.1	18.5	0.771	0.895	0.397	0.461	
								1	49	19.1	18.5	0.809	0.933	0.418	0.482	
					Left Tilt	132572	1770.0	50	24	19.1	18.5	0.809	0.935	0.417	0.482	129
								1	49	19.1	18.5	0.809	0.935	0.417	0.482	
						132322	1745.0	1	49	19.1	18.5	0.377	0.432	0.183	0.210	
								50	24	19.1	18.5	0.379	0.432	0.183	0.209	
					Right Touch	132322	1745.0	1	49	19.1	18.5	0.208	0.238	0.120	0.137	
								50	24	19.1	18.5	0.204	0.233	0.118	0.135	
	Body & Hotspot	QPSK	Mode B	5	Right Tilt	132322	1745.0	1	49	19.1	18.5	0.174	0.199	0.098	0.112	
								50	24	19.1	18.5	0.173	0.197	0.097	0.111	
					Rear	132322	1745.0	1	49	19.3	19.1	0.548	0.574	0.297	0.311	
								50	24	19.3	19.0	0.550	0.585	0.297	0.316	130
					Front	132322	1745.0	1	49	19.3	19.1	0.256	0.268	0.140	0.147	
								50	24	19.3	19.0	0.258	0.275	0.141	0.150	
	Hotspot	QPSK	Mode B	5	Edge 1	132322	1745.0	1	49	19.3	19.1	0.288	0.302	0.129	0.135	
								50	24	19.3	19.0	0.293	0.312	0.130	0.138	
					Edge 2	132072	1720.0	1	49	19.3	19.0	0.740	0.802	0.354	0.384	
								50	24	19.3	18.9	0.744	0.808	0.354	0.385	
						132322	1745.0	1	49	19.3	19.1	0.816	0.854	0.391	0.409	
								50	24	19.3	19.0	0.821	0.874	0.391	0.416	131
								100	0	19.3	18.9	0.800	0.887	0.382	0.424	
								1	49	19.3	18.9	0.746	0.814	0.365	0.398	
								50	24	19.3	19.0	0.748	0.807	0.365	0.394	

10.19. LTE Band 71 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	QPSK	Mode A	0	Left Touch	133297	680.5	1	49	25.7	25.2	0.140	0.159	0.118	0.134	
								50	24	24.7	24.1	0.115	0.132	0.098	0.113	
					Left Tilt	133297	680.5	1	49	25.7	25.2	0.053	0.060	0.037	0.042	
								50	24	24.7	24.1	0.067	0.077	0.053	0.061	
					Right Touch	133297	680.5	1	49	25.7	25.2	0.154	0.175	0.125	0.142	132
								50	24	24.7	24.1	0.124	0.142	0.101	0.116	
					Right Tilt	133297	680.5	1	49	25.7	25.2	0.089	0.101	0.076	0.086	
								50	24	24.7	24.1	0.071	0.082	0.061	0.070	
	Body & Hotspot	QPSK	Mode B	5	Rear	133297	680.5	1	49	25.7	25.2	0.513	0.582	0.293	0.333	133
								50	24	24.7	24.1	0.359	0.412	0.211	0.242	
					Front	133297	680.5	1	49	25.7	25.2	0.220	0.250	0.151	0.171	
								50	24	24.7	24.1	0.178	0.204	0.122	0.140	
					Edge 2	133297	680.5	1	49	25.7	25.2	0.739	0.839	0.415	0.471	134
								50	24	24.7	24.1	0.448	0.514	0.302	0.347	
	Hotspot	QPSK	Mode B	5	Edge 3	133297	680.5	1	49	25.7	25.2	0.220	0.250	0.114	0.129	
								50	24	24.7	24.1	0.210	0.241	0.108	0.124	
					Edge 4	133297	680.5	1	49	25.7	25.2	0.230	0.261	0.158	0.179	
								50	24	24.7	24.1	0.176	0.202	0.123	0.141	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	QPSK	Mode A	0	Left Touch	133297	680.5	1	49	24.7	24.4	0.808	0.876	0.400	0.434	135
								50	24	23.7	23.4	0.640	0.694	0.318	0.345	
					Left Tilt	133297	680.5	1	49	24.7	24.4	0.586	0.635	0.277	0.300	
								50	24	23.7	23.4	0.455	0.493	0.218	0.236	
					Right Touch	133297	680.5	1	49	24.7	24.4	0.622	0.674	0.342	0.371	
								50	24	23.7	23.4	0.446	0.483	0.257	0.279	
					Right Tilt	133297	680.5	1	49	24.7	24.4	0.477	0.517	0.241	0.261	
								50	24	23.7	23.4	0.428	0.464	0.211	0.229	
	Body & Hotspot	QPSK	Mode B	5	Rear	133297	680.5	1	49	24.7	24.4	0.576	0.624	0.308	0.334	136
								50	24	23.7	23.4	0.423	0.459	0.228	0.247	
					Front	133297	680.5	1	49	24.7	24.4	0.242	0.262	0.158	0.171	
								50	24	23.7	23.4	0.203	0.220	0.129	0.140	
					Edge 1	133297	680.5	1	49	24.7	24.4	0.242	0.262	0.105	0.114	
								50	24	23.7	23.4	0.194	0.210	0.084	0.091	
	Hotspot	QPSK	Mode B	5	Edge 2	133297	680.5	1	49	24.7	24.4	0.127	0.138	0.081	0.088	
								50	24	23.7	23.4	0.059	0.064	0.037	0.040	
					Edge 4	133297	680.5	1	49	24.7	24.4	0.272	0.295	0.173	0.188	
								50	24	23.7	23.4	0.202	0.219	0.129	0.140	

SAR Testing for 5G Bands was performed in one of two ways:

1.) If the 5G Band has a LTE equivalent Band, such as LTE Band 5 for 5G Band n5; then spot-checks were performed on the worst-case position per Exposure Condition per Antenna. If the Reported SAR Result for the 5G spot-check is $\leq$ the Reported SAR result of the LTE equivalent Band, then no further testing is required. If the value is more than 10% greater than the LTE equivalent Band, full testing is required.

2.) If there is no LTE equivalent Band supported on this device, then full testing is required for that band.

10.20. 5G NR Band n5 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	167300	836.5	1	52	25.7	25.0	0.162	0.190	0.122	0.143	188
								50	25	25.7	24.8	0.107	0.132	0.080	0.099	
					Left Tilt	167300	836.5	1	52	25.7	25.0	0.106	0.125	0.080	0.094	
								50	25	25.7	24.8	0.062	0.077	0.047	0.058	
					Right Touch	167300	836.5	1	52	25.7	25.0	0.144	0.169	0.111	0.130	
								50	25	25.7	24.8	0.130	0.160	0.096	0.118	
					Right Tilt	167300	836.5	1	52	25.7	25.0	0.131	0.154	0.101	0.119	
								50	25	25.7	24.8	0.074	0.091	0.057	0.070	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	167300	836.5	1	52	24.5	24.0	0.518	0.581	0.293	0.329	
								50	25	24.5	24.0	0.522	0.586	0.275	0.309	189
					Front	167300	836.5	1	52	24.5	24.0	0.251	0.282	0.148	0.166	
								50	25	24.5	24.0	0.220	0.247	0.128	0.144	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	167300	836.5	1	52	24.5	24.0	0.335	0.376	0.177	0.199	
								50	25	24.5	24.0	0.472	0.530	0.298	0.334	
					Edge 3	167300	836.5	1	52	24.5	24.0	0.273	0.306	0.120	0.135	
								50	25	24.5	24.0	0.361	0.405	0.154	0.173	
					Edge 4	167300	836.5	1	52	24.5	24.0	0.123	0.138	0.078	0.087	
								50	25	24.5	24.0	0.127	0.142	0.081	0.091	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	167300	836.5	1	52	24.1	23.6	0.575	0.645	0.398	0.447	
								50	25	24.1	23.5	0.433	0.497	0.296	0.340	
					Left Tilt	167300	836.5	1	52	24.1	23.6	0.418	0.469	0.245	0.275	
								50	25	24.1	23.5	0.310	0.356	0.182	0.209	
					Right Touch	167300	836.5	1	52	24.1	23.6	0.664	0.745	0.448	0.503	190
								50	25	24.1	23.5	0.540	0.620	0.364	0.418	
					Right Tilt	167300	836.5	1	52	24.1	23.6	0.483	0.542	0.260	0.292	
								50	25	24.1	23.5	0.316	0.363	0.176	0.202	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	167300	836.5	1	52	24.7	24.0	0.513	0.603	0.327	0.384	191
								50	25	24.7	23.9	0.384	0.462	0.241	0.290	
					Front	167300	836.5	1	52	24.7	24.0	0.320	0.376	0.212	0.249	
								50	25	24.7	23.9	0.204	0.245	0.136	0.164	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	167300	836.5	1	52	24.7	24.0	0.193	0.227	0.100	0.117	
								50	25	24.7	23.9	0.114	0.137	0.061	0.073	
					Edge 2	167300	836.5	1	52	24.7	24.0	0.176	0.207	0.113	0.133	
								50	25	24.7	23.9	0.109	0.131	0.070	0.084	
					Edge 4	167300	836.5	1	52	24.7	24.0	0.296	0.348	0.193	0.227	
								50	25	24.7	23.9	0.193	0.232	0.126	0.151	

10.21. 5G NR Band n7 (40MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	507000	2535.0	1	107	25.7	25.0	0.267	0.314	0.149	0.175	
								108	54	25.7	24.9	0.284	0.341	0.161	0.194	
					Left Tilt	507000	2535.0	1	107	25.7	25.0	0.156	0.183	0.077	0.090	
								108	54	25.7	24.9	0.193	0.232	0.096	0.116	
					Right Touch	507000	2535.0	1	107	25.7	25.0	0.499	0.586	0.254	0.298	
								108	54	25.7	24.9	0.528	0.635	0.262	0.315	192
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	507000	2535.0	1	107	25.7	25.0	0.097	0.114	0.052	0.062	
								108	54	25.7	24.9	0.119	0.143	0.064	0.077	
					Rear	507000	2535.0	1	107	20.2	19.3	0.523	0.643	0.288	0.354	193
								108	54	20.2	19.3	0.451	0.555	0.249	0.306	
					Front	507000	2535.0	1	107	20.2	19.3	0.480	0.591	0.189	0.233	
								108	54	20.2	19.3	0.442	0.544	0.176	0.217	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 2	507000	2535.0	1	107	20.2	19.3	0.686	0.844	0.292	0.359	
								108	54	20.2	19.3	0.711	0.875	0.299	0.368	194
					Edge 3	507000	2535.0	1	107	20.2	19.3	0.699	0.860	0.260	0.320	
								108	54	20.2	19.3	0.703	0.865	0.260	0.320	
					Edge 4	507000	2535.0	1	107	20.2	19.3	0.059	0.073	0.025	0.031	
								108	54	20.2	19.3	0.062	0.076	0.026	0.032	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	507000	2535.0	1	107	18.5	18.0	0.630	0.707	0.231	0.259	
								108	54	18.5	18.0	0.617	0.692	0.227	0.255	
					Left Tilt	507000	2535.0	1	107	18.5	18.0	0.691	0.775	0.247	0.277	
								108	54	18.5	18.0	0.674	0.756	0.240	0.269	
					Right Touch	507000	2535.0	1	107	18.5	18.0	0.819	0.919	0.303	0.340	195
								108	54	18.5	18.0	0.812	0.911	0.299	0.335	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Right Tilt	507000	2535.0	1	107	18.5	18.0	0.589	0.661	0.219	0.246	
								108	54	18.5	18.0	0.503	0.564	0.187	0.210	
					Rear	507000	2535.0	1	107	18.8	18.3	0.651	0.730	0.263	0.295	
								108	54	18.8	18.3	0.717	0.804	0.293	0.329	196
					Front	507000	2535.0	1	107	18.8	18.3	0.272	0.305	0.111	0.125	
								108	54	18.8	18.3	0.265	0.297	0.110	0.123	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	507000	2535.0	1	107	18.8	18.3	0.449	0.504	0.164	0.184	
								108	54	18.8	18.3	0.441	0.495	0.160	0.180	
					Edge 2	507000	2535.0	1	107	18.8	18.3	0.033	0.037	0.017	0.019	
								108	54	18.8	18.3	0.032	0.036	0.017	0.019	
					Edge 4	507000	2535.0	1	107	18.8	18.3	0.679	0.762	0.314	0.352	
								108	54	18.8	18.3	0.633	0.710	0.292	0.328	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	507000	2535.0	1	107	23.3	22.8	0.757	0.849	0.397	0.445	197
								108	54	23.3	22.8	0.670	0.752	0.351	0.394	
					Left Tilt	507000	2535.0	1	107	23.3	22.8	0.276	0.310	0.146	0.164	
								108	54	23.3	22.8	0.242	0.272	0.129	0.145	
					Right Touch	507000	2535.0	1	107	23.3	22.8	0.308	0.346	0.176	0.197	
								108	54	23.3	22.8	0.277	0.311	0.156	0.175	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	507000	2535.0	1	107	23.3	22.8	0.319	0.358	0.167	0.187	
								108	54	23.3	22.8	0.306	0.343	0.156	0.175	
					Rear	507000	2535.0	1	107	17.1	16.9	0.567	0.594	0.260	0.272	198
								108	54	17.1	16.9	0.555	0.581	0.253	0.265	
					Front	507000	2535.0	1	107	17.1	16.9	0.449	0.470	0.200	0.209	
								108	54	17.1	16.9	0.411	0.430	0.183	0.192	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	507000	2535.0	1	107	17.1	16.9	0.074	0.078	0.032	0.034	
								108	54	17.1	16.9	0.071	0.074	0.031	0.032	
					Edge 4	507000	2535.0	1	107	17.1	16.9	0.784	0.821	0.332	0.348	199
								108	54	17.1	16.9	0.775	0.812	0.325	0.340	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	507000	2535.0	1	107	19.5	19.2	0.815	0.873	0.419	0.449	200
								108	54	19.5	19.2	0.841	0.901	0.427	0.458	
					Left Tilt	507000	2535.0	1	107	19.5	19.2	0.456	0.489	0.207	0.222	
								108	54	19.5	19.2	0.441	0.473	0.203	0.218	
					Right Touch	507000	2535.0	1	107	19.5	19.2	0.203	0.218	0.108	0.116	
								108	54	19.5	19.2	0.184	0.197	0.104	0.111	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	507000	2535.0	1	107	19.5	19.2	0.145	0.155	0.076	0.081	
								108	54	19.5	19.2	0.144	0.154	0.075	0.080	
					Rear	507000	2535.0	1	107	20.4	20.3	0.422	0.432	0.227	0.232	
								108	54	20.4	20.2	0.418	0.438	0.235	0.246	
					Front	507000	2535.0	1	107	20.4	20.3	0.425	0.435	0.222	0.227	
								108	54	20.4	20.2	0.476	0.498	0.235	0.246	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	507000	2535.0	1	107	20.4	20.3	0.209	0.214	0.079	0.081	
								108	54	20.4	20.2	0.192	0.201	0.074	0.077	
					Edge 2	507000	2535.0	1	107	20.4	20.3	0.799	0.818	0.353	0.361	202
								108	54	20.4	20.2	0.753	0.788	0.334	0.350	

10.22. 5G NR Band n12 (15MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	141500	707.5	1	39	25.7	24.9	0.140	0.168	0.109	0.131	
								36	18	25.7	24.7	0.136	0.171	0.106	0.133	
					Left Tilt	141500	707.5	1	39	25.7	24.9	0.097	0.116	0.076	0.092	
								36	18	25.7	24.7	0.090	0.113	0.072	0.091	
					Right Touch	141500	707.5	1	39	25.7	24.9	0.174	0.209	0.134	0.161	203
								36	18	25.7	24.7	0.151	0.190	0.117	0.147	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	141500	707.5	1	39	25.7	24.9	0.057	0.069	0.037	0.044	
								36	18	25.7	24.7	0.077	0.097	0.062	0.078	
					Rear	141500	707.5	1	39	25.7	24.9	0.441	0.530	0.263	0.316	
								36	18	25.7	24.7	0.454	0.572	0.261	0.329	
					Front	141500	707.5	1	39	25.7	24.9	0.298	0.358	0.185	0.222	
								36	18	25.7	24.7	0.270	0.340	0.167	0.210	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 2	141500	707.5	1	39	25.7	24.9	0.628	0.755	0.415	0.499	
								36	18	25.7	24.7	0.717	0.903	0.467	0.588	
					Edge 3	141500	707.5	1	39	25.7	24.9	0.379	0.456	0.163	0.196	
								36	18	25.7	24.7	0.398	0.501	0.177	0.223	
					Edge 4	141500	707.5	1	39	25.7	24.9	0.307	0.369	0.196	0.236	
								36	18	25.7	24.7	0.308	0.388	0.199	0.251	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	141500	707.5	1	39	24.3	23.9	0.665	0.729	0.390	0.428	
								36	18	24.3	23.8	0.726	0.815	0.423	0.475	
					Left Tilt	141500	707.5	1	39	24.3	23.9	0.675	0.740	0.365	0.400	
								36	18	24.3	23.8	0.683	0.766	0.348	0.390	
					Right Touch	141500	707.5	1	39	24.3	23.9	0.785	0.861	0.486	0.533	
								36	18	24.3	23.8	0.802	0.900	0.508	0.570	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	141500	707.5	1	39	24.3	23.9	0.857	0.940	0.541	0.593	206
								36	18	24.3	23.8	0.658	0.738	0.372	0.417	
					Rear	141500	707.5	1	39	24.7	24.1	0.503	0.578	0.294	0.338	
								36	18	24.7	24.0	0.580	0.681	0.351	0.412	
					Front	141500	707.5	1	39	24.7	24.1	0.316	0.363	0.201	0.231	
								36	18	24.7	24.0	0.232	0.273	0.151	0.177	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	141500	707.5	1	39	24.7	24.1	0.287	0.330	0.142	0.163	
								36	18	24.7	24.0	0.223	0.262	0.105	0.123	
					Edge 2	141500	707.5	1	39	24.7	24.1	0.161	0.185	0.105	0.121	
								36	18	24.7	24.0	0.137	0.161	0.089	0.104	
					Edge 4	141500	707.5	1	39	24.7	24.1	0.331	0.380	0.215	0.247	
								36	18	24.7	24.0	0.342	0.402	0.222	0.261	

10.23. 5G NR Band n14 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	158600	793.0	1	25	25.7	25.1	0.140	0.161	0.140	0.161	
								25	12	25.7	24.9	0.129	0.155	0.129	0.155	
					Left Tilt	158600	793.0	1	25	25.7	25.1	0.088	0.101	0.088	0.101	
								25	12	25.7	24.9	0.080	0.096	0.080	0.096	
					Right Touch	158600	793.0	1	25	25.7	25.1	0.203	0.233	0.203	0.233	208
								25	12	25.7	24.9	0.138	0.166	0.138	0.166	
					Right Tilt	158600	793.0	1	25	25.7	25.1	0.098	0.113	0.098	0.113	
								25	12	25.7	24.9	0.078	0.094	0.078	0.094	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	158600	793.0	1	25	25.7	25.1	0.513	0.589	0.513	0.589	209
								25	12	25.7	24.9	0.483	0.581	0.483	0.581	
					Front	158600	793.0	1	25	25.7	25.1	0.239	0.274	0.239	0.274	
								25	12	25.7	24.9	0.341	0.410	0.341	0.410	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	158600	793.0	1	25	25.7	25.1	0.642	0.737	0.642	0.737	210
								25	12	25.7	24.9	0.549	0.660	0.549	0.660	
					Edge 3	158600	793.0	1	25	25.7	25.1	0.275	0.316	0.275	0.316	
								25	12	25.7	24.9	0.255	0.307	0.255	0.307	
					Edge 4	158600	793.0	1	25	25.7	25.1	0.198	0.227	0.198	0.227	
								25	12	25.7	24.9	0.178	0.214	0.178	0.214	
Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	158600	793.0	1	25	24.5	24.2	0.812	0.870	0.486	0.521	
								25	12	24.5	24.1	0.774	0.849	0.437	0.479	
					Left Tilt	158600	793.0	1	25	24.5	24.2	0.804	0.862	0.487	0.522	
								25	12	24.5	24.1	0.630	0.691	0.318	0.349	
					Right Touch	158600	793.0	1	25	24.5	24.2	0.884	0.947	0.516	0.553	211
								25	12	24.5	24.1	0.859	0.942	0.503	0.552	
					Right Tilt	158600	793.0	1	25	24.5	24.2	0.637	0.683	0.319	0.342	
								25	12	24.5	24.1	0.548	0.601	0.291	0.319	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	158600	793.0	1	25	24.7	24.1	0.571	0.656	0.331	0.380	
								25	12	24.7	24.0	0.673	0.791	0.384	0.451	212
					Front	158600	793.0	1	25	24.7	24.1	0.358	0.411	0.222	0.255	
								25	12	24.7	24.0	0.310	0.364	0.199	0.234	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	158600	793.0	1	25	24.7	24.1	0.301	0.346	0.142	0.163	
								25	12	24.7	24.0	0.288	0.338	0.134	0.157	
					Edge 2	158600	793.0	1	25	24.7	24.1	0.275	0.316	0.177	0.203	
								25	12	24.7	24.0	0.256	0.301	0.165	0.194	
					Edge 4	158600	793.0	1	25	24.7	24.1	0.267	0.307	0.173	0.199	
								25	12	24.7	24.0	0.410	0.482	0.263	0.309	

10.24. 5G NR Band n25 (40MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	376500	1882.5	1	107	25.7	25.2	0.202	0.227	0.131	0.147	
								108	54	25.7	24.9	0.188	0.226	0.122	0.147	
					Left Tilt	376500	1882.5	1	107	25.7	25.2	0.162	0.182	0.097	0.109	
								108	54	25.7	24.9	0.156	0.188	0.093	0.111	
					Right Touch	376500	1882.5	1	107	25.7	25.2	0.367	0.412	0.219	0.246	
								108	54	25.7	24.9	0.453	0.545	0.277	0.333	213
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	376500	1882.5	1	107	25.7	25.2	0.115	0.129	0.074	0.083	
								108	54	25.7	24.9	0.122	0.147	0.078	0.093	
					Front	376500	1882.5	1	107	19.0	18.4	0.434	0.498	0.217	0.249	214
								108	54	19.0	18.4	0.425	0.488	0.188	0.216	
					Edge 2	376500	1882.5	1	107	19.0	18.4	0.257	0.295	0.140	0.161	
								108	54	19.0	18.4	0.253	0.290	0.136	0.156	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 2	376500	1882.5	1	107	19.0	18.4	0.361	0.414	0.172	0.197	
								108	54	19.0	18.4	0.351	0.403	0.167	0.192	
					Edge 3	376500	1882.5	1	107	19.0	18.4	0.603	0.692	0.283	0.325	
								108	54	19.0	18.4	0.657	0.754	0.305	0.350	215
					Edge 4	376500	1882.5	1	107	19.0	18.4	0.006	0.007	0.004	0.005	
								108	54	19.0	18.4	0.006	0.007	0.003	0.004	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	376500	1882.5	1	107	21.5	20.9	0.360	0.413	0.221	0.254	
								108	54	21.5	20.8	0.290	0.341	0.115	0.135	
					Left Tilt	376500	1882.5	1	107	21.5	20.9	0.225	0.258	0.126	0.145	
								108	54	21.5	20.8	0.208	0.244	0.115	0.135	
					Right Touch	376500	1882.5	1	107	21.5	20.9	0.529	0.607	0.290	0.333	
								108	54	21.5	20.8	0.683	0.802	0.398	0.468	216
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	376500	1882.5	1	107	21.5	20.9	0.455	0.522	0.398	0.457	
								108	54	21.5	20.8	0.382	0.449	0.179	0.210	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Rear	376500	1882.5	1	107	21.7	21.0	0.720	0.846	0.335	0.394	217
								108	54	21.7	21.0	0.629	0.739	0.293	0.344	
					Front	376500	1882.5	1	107	21.7	21.0	0.374	0.439	0.192	0.226	
								108	54	21.7	21.0	0.404	0.475	0.204	0.240	
					Edge 1	376500	1882.5	1	107	21.7	21.0	0.370	0.435	0.154	0.181	
								108	54	21.7	21.0	0.366	0.430	0.153	0.180	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	376500	1882.5	1	107	21.7	21.0	0.022	0.026	0.011	0.013	
								108	54	21.7	21.0	0.014	0.017	0.007	0.008	
					Edge 4	376500	1882.5	1	107	21.7	21.0	0.529	0.622	0.266	0.313	
								108	54	21.7	21.0	0.602	0.707	0.305	0.358	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	376500	1882.5	1	107	24.8	24.3	0.386	0.433	0.242	0.272	218
								108	54	24.8	24.3	0.365	0.410	0.225	0.252	
					Left Tilt	376500	1882.5	1	107	24.8	24.3	0.211	0.237	0.132	0.148	
								108	54	24.8	24.3	0.196	0.220	0.120	0.135	
					Right Touch	376500	1882.5	1	107	24.8	24.3	0.206	0.231	0.131	0.147	
								108	54	24.8	24.3	0.209	0.235	0.136	0.153	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	376500	1882.5	1	107	24.8	24.3	0.195	0.219	0.115	0.129	
								108	54	24.8	24.3	0.194	0.218	0.115	0.129	
					Rear	376500	1882.5	1	107	20.8	20.6	0.642	0.672	0.367	0.384	
								108	54	20.8	20.6	0.687	0.719	0.378	0.396	219
					Front	376500	1882.5	1	107	20.8	20.6	0.467	0.489	0.275	0.288	
								108	54	20.8	20.6	0.459	0.481	0.270	0.283	
ANT3	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	376500	1882.5	1	107	20.8	20.6	0.371	0.388	0.187	0.196	
								108	54	20.8	20.6	0.367	0.384	0.186	0.195	
					Edge 4	376500	1882.5	1	107	20.8	20.6	0.822	0.861	0.430	0.450	
								108	54	20.8	20.6	0.852	0.892	0.446	0.467	220

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	376500	1882.5	1	107	19.2	19.0	0.763	0.799	0.419	0.439	221
								108	54	19.2	19.0	0.789	0.826	0.406	0.425	
					Left Tilt	376500	1882.5	1	107	19.2	19.0	0.519	0.543	0.258	0.270	
								108	54	19.2	19.0	0.461	0.483	0.234	0.245	
					Right Touch	376500	1882.5	1	107	19.2	19.0	0.371	0.388	0.223	0.234	
								108	54	19.2	19.0	0.309	0.324	0.185	0.194	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	376500	1882.5	1	107	19.2	19.0	0.212	0.222	0.120	0.126	
								108	54	19.2	19.0	0.200	0.209	0.112	0.117	
					Rear	376500	1882.5	1	107	19.8	19.6	0.735	0.770	0.396	0.415	
								108	54	19.8	19.6	0.849	0.889	0.474	0.496	
					Front	376500	1882.5	1	107	19.8	19.6	0.383	0.401	0.219	0.229	
								108	54	19.8	19.6	0.374	0.392	0.213	0.223	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	376500	1882.5	1	107	19.8	19.6	0.316	0.331	0.155	0.162	
								108	54	19.8	19.6	0.327	0.342	0.154	0.161	
					Edge 2	376500	1882.5	1	107	19.8	19.6	0.869	0.910	0.433	0.453	223
								108	54	19.8	19.6	0.822	0.861	0.401	0.420	

10.25. 5G NR Band n26 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	166300	831.5	1	25	25.7	25.1	0.058	0.067	0.044	0.051	
								25	12	25.7	25.1	0.095	0.109	0.072	0.083	
					Left Tilt	166300	831.5	1	25	25.7	25.1	0.034	0.039	0.026	0.030	
								25	12	25.7	25.1	0.060	0.069	0.046	0.053	
					Right Touch	166300	831.5	1	25	25.7	25.1	0.152	0.175	0.116	0.133	224
								25	12	25.7	25.1	0.134	0.154	0.098	0.113	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	166300	831.5	1	25	25.7	25.1	0.032	0.036	0.024	0.027	
								25	12	25.7	25.1	0.067	0.077	0.051	0.059	
					Rear	166300	831.5	1	25	24.5	24.3	0.684	0.716	0.137	0.143	225
								25	12	24.5	24.3	0.531	0.556	0.290	0.304	
					Front	166300	831.5	1	25	24.5	24.3	0.136	0.142	0.078	0.082	
								25	12	24.5	24.3	0.154	0.161	0.092	0.096	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 2	166300	831.5	1	25	24.5	24.3	0.518	0.542	0.139	0.146	
								25	12	24.5	24.3	0.519	0.543	0.326	0.341	
					Edge 3	166300	831.5	1	25	24.5	24.3	0.343	0.359	0.069	0.072	
								25	12	24.5	24.3	0.330	0.346	0.145	0.152	
					Edge 4	166300	831.5	1	25	24.5	24.3	0.067	0.070	0.043	0.045	
								25	12	24.5	24.3	0.123	0.129	0.078	0.082	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	166300	831.5	1	25	24.1	23.8	0.280	0.300	0.194	0.208	
								25	12	24.1	23.9	0.452	0.473	0.307	0.321	
					Left Tilt	166300	831.5	1	25	24.1	23.8	0.197	0.211	0.117	0.125	
								25	12	24.1	23.9	0.312	0.327	0.183	0.192	
					Right Touch	166300	831.5	1	25	24.1	23.8	0.629	0.674	0.417	0.447	226
								25	12	24.1	23.9	0.648	0.679	0.405	0.424	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	166300	831.5	1	25	24.1	23.8	0.396	0.424	0.221	0.237	
								25	12	24.1	23.9	0.294	0.308	0.173	0.181	
					Rear	166300	831.5	1	25	24.7	24.2	0.139	0.156	0.083	0.093	
								25	12	24.7	24.1	0.140	0.161	0.088	0.101	
					Front	166300	831.5	1	25	24.7	24.2	0.126	0.141	0.082	0.092	
								25	12	24.7	24.1	0.078	0.090	0.049	0.056	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	166300	831.5	1	25	24.7	24.2	0.054	0.061	0.029	0.033	
								25	12	24.7	24.1	0.051	0.059	0.025	0.029	
					Edge 2	166300	831.5	1	25	24.7	24.2	0.075	0.084	0.048	0.054	
								25	12	24.7	24.1	0.030	0.034	0.019	0.022	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 4	166300	831.5	1	25	24.7	24.2	0.158	0.177	0.102	0.114	228
								25	12	24.7	24.1	0.084	0.096	0.055	0.063	

10.26. 5G NR Band n30 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	462000	2310.0	1	25	25.6	25.1	0.175	0.196	0.102	0.114	
								25	12	25.6	24.9	0.204	0.240	0.118	0.139	
					Left Tilt	462000	2310.0	1	25	25.6	25.1	0.148	0.166	0.081	0.091	
								25	12	25.6	24.9	0.143	0.168	0.077	0.090	
					Right Touch	462000	2310.0	1	25	25.6	25.1	0.502	0.563	0.272	0.305	229
								25	12	25.6	24.9	0.494	0.580	0.269	0.316	
					Right Tilt	462000	2310.0	1	25	25.6	25.1	0.110	0.123	0.059	0.066	
								25	12	25.6	24.9	0.113	0.133	0.061	0.072	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	462000	2310.0	1	25	20.2	19.9	0.614	0.658	0.277	0.297	230
								25	12	20.2	19.9	0.625	0.670	0.255	0.273	
					Front	462000	2310.0	1	25	20.2	19.9	0.334	0.358	0.168	0.180	
								25	12	20.2	19.9	0.362	0.388	0.177	0.190	
					Edge 2	462000	2310.0	1	25	20.2	19.9	0.734	0.786	0.313	0.335	231
								25	12	20.2	19.9	0.815	0.873	0.368	0.394	
					Edge 3	462000	2310.0	1	25	20.2	19.9	0.397	0.425	0.160	0.171	
								25	12	20.2	19.9	0.331	0.355	0.132	0.141	
					Edge 4	462000	2310.0	1	25	20.2	19.9	0.028	0.030	0.015	0.016	
								25	12	20.2	19.9	0.024	0.026	0.013	0.014	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	462000	2310.0	1	25	20.5	20.0	0.219	0.246	0.099	0.111	
								25	12	20.5	20.0	0.166	0.186	0.085	0.095	
					Left Tilt	462000	2310.0	1	25	20.5	20.0	0.309	0.347	0.129	0.145	
								25	12	20.5	20.0	0.224	0.251	0.097	0.109	
					Right Touch	462000	2310.0	1	25	20.5	20.0	0.838	0.940	0.373	0.419	232
								25	12	20.5	20.0	0.797	0.894	0.357	0.401	
					Right Tilt	462000	2310.0	1	25	20.5	20.0	0.673	0.755	0.269	0.302	
								25	12	20.5	20.0	0.538	0.604	0.218	0.245	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	462000	2310.0	1	25	21.0	20.8	0.749	0.784	0.335	0.351	233
								25	12	21.0	20.8	0.684	0.716	0.278	0.291	
					Front	462000	2310.0	1	25	21.0	20.8	0.287	0.301	0.157	0.164	
								25	12	21.0	20.8	0.297	0.311	0.162	0.170	
					Edge 1	462000	2310.0	1	25	21.0	20.8	0.245	0.257	0.104	0.109	
								25	12	21.0	20.8	0.238	0.249	0.101	0.106	
					Edge 2	462000	2310.0	1	25	21.0	20.8	0.018	0.019	0.008	0.008	
								25	12	21.0	20.8	0.020	0.021	0.009	0.009	
					Edge 4	462000	2310.0	1	25	21.0	20.8	0.791	0.828	0.360	0.377	234
								25	12	21.0	20.8	0.729	0.763	0.326	0.341	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	462000	2310.0	1	25	23.6	23.0	0.535	0.614	0.292	0.335	235
								25	12	23.6	23.0	0.455	0.522	0.238	0.273	
					Left Tilt	462000	2310.0	1	25	23.6	23.0	0.143	0.164	0.080	0.092	
								25	12	23.6	23.0	0.137	0.157	0.077	0.088	
					Right Touch	462000	2310.0	1	25	23.6	23.0	0.201	0.231	0.114	0.131	
								25	12	23.6	23.0	0.164	0.188	0.096	0.110	
					Right Tilt	462000	2310.0	1	25	23.6	23.0	0.210	0.241	0.115	0.132	
								25	12	23.6	23.0	0.195	0.224	0.107	0.123	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	462000	2310.0	1	25	19.3	18.9	0.484	0.531	0.257	0.282	236
								25	12	19.3	18.9	0.538	0.590	0.282	0.309	
					Front	462000	2310.0	1	25	19.3	18.9	0.374	0.410	0.184	0.202	
								25	12	19.3	18.9	0.393	0.431	0.193	0.212	
					Edge 3	462000	2310.0	1	25	19.3	18.9	0.105	0.115	0.052	0.057	
								25	12	19.3	18.9	0.107	0.117	0.053	0.058	
					Edge 4	462000	2310.0	1	25	19.3	18.9	0.699	0.766	0.315	0.345	
								25	12	19.3	18.9	0.707	0.775	0.323	0.354	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	462000	2310.0	1	25	19.7	19.6	0.780	0.798	0.409	0.419	238
								25	12	19.7	19.6	0.725	0.742	0.381	0.390	
					Left Tilt	462000	2310.0	1	25	19.7	19.6	0.433	0.443	0.218	0.223	
								25	12	19.7	19.6	0.450	0.460	0.212	0.217	
					Right Touch	462000	2310.0	1	25	19.7	19.6	0.201	0.206	0.118	0.121	
								25	12	19.7	19.6	0.315	0.322	0.178	0.182	
					Right Tilt	462000	2310.0	1	25	19.7	19.6	0.191	0.195	0.100	0.102	
								25	12	19.7	19.6	0.199	0.204	0.107	0.109	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	462000	2310.0	1	25	20.1	19.7	0.768	0.842	0.418	0.458	
								25	12	20.1	19.7	0.847	0.929	0.445	0.488	239
					Front	462000	2310.0	1	25	20.1	19.7	0.365	0.400	0.202	0.221	
								25	12	20.1	19.7	0.311	0.341	0.172	0.189	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	462000	2310.0	1	25	20.1	19.7	0.156	0.171	0.065	0.071	
								25	12	20.1	19.7	0.145	0.159	0.060	0.066	
					Edge 2	462000	2310.0	1	25	20.1	19.7	0.680	0.746	0.315	0.345	
								25	12	20.1	19.7	0.724	0.794	0.341	0.374	

10.27. 5G NR Band n41 (100MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	518598	2593.0	1	136	25.7	25.0	0.293	0.344	0.154	0.181	
								135	67	25.7	24.7	0.285	0.359	0.151	0.190	
					Left Tilt	518598	2593.0	1	136	25.7	25.0	0.146	0.172	0.070	0.082	
								135	67	25.7	24.7	0.149	0.188	0.075	0.094	
					Right Touch	518598	2593.0	1	136	25.7	25.0	0.395	0.464	0.194	0.228	
								135	67	25.7	24.7	0.442	0.556	0.208	0.262	240
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	518598	2593.0	1	136	25.7	25.0	0.103	0.121	0.053	0.062	
								135	67	25.7	24.7	0.111	0.140	0.057	0.072	
					Rear	518598	2593.0	1	136	20.4	19.9	0.529	0.594	0.261	0.293	241
								135	67	20.4	19.9	0.499	0.560	0.252	0.283	
					Front	518598	2593.0	1	136	20.4	19.9	0.287	0.322	0.121	0.136	
								135	67	20.4	19.9	0.337	0.378	0.138	0.155	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 2	518598	2593.0	1	136	20.4	19.9	0.737	0.827	0.297	0.333	242
								135	67	20.4	19.9	0.717	0.804	0.291	0.327	
					Edge 3	518598	2593.0	1	136	20.4	19.9	0.451	0.506	0.163	0.183	
								135	67	20.4	19.9	0.450	0.505	0.164	0.184	
					Edge 4	518598	2593.0	1	136	20.4	19.9	0.073	0.082	0.029	0.033	
								135	67	20.4	19.9	0.068	0.077	0.028	0.031	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	518598	2593.0	1	136	18.3	18.1	0.596	0.624	0.217	0.227	
								135	67	18.3	18.1	0.652	0.683	0.238	0.249	
					Left Tilt	518598	2593.0	1	136	18.3	18.1	0.614	0.643	0.219	0.229	
								135	67	18.3	18.1	0.675	0.707	0.245	0.257	
					Right Touch	518598	2593.0	1	136	18.3	18.1	0.887	0.929	0.335	0.351	
								135	67	18.3	18.1	0.904	0.947	0.343	0.359	243
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Right Tilt	518598	2593.0	1	136	18.3	18.1	0.620	0.649	0.235	0.246	
								135	67	18.3	18.1	0.650	0.681	0.245	0.257	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	518598	2593.0	1	136	18.8	18.4	0.857	0.940	0.342	0.375	244
								135	67	18.8	18.4	0.802	0.879	0.323	0.354	
					Front	518598	2593.0	1	136	18.8	18.4	0.367	0.402	0.145	0.159	
								135	67	18.8	18.4	0.432	0.474	0.169	0.185	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 1	518598	2593.0	1	136	18.8	18.4	0.674	0.739	0.235	0.258	
								135	67	18.8	18.4	0.616	0.675	0.217	0.238	
					Edge 2	518598	2593.0	1	136	18.8	18.4	0.052	0.056	0.025	0.028	
								135	67	18.8	18.4	0.053	0.058	0.025	0.027	
					Edge 4	518598	2593.0	1	136	18.8	18.4	0.667	0.731	0.282	0.309	
								135	67	18.8	18.4	0.687	0.753	0.279	0.306	
ANT5	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	518598	2593.0	1	136	24.0	23.9	0.579	0.592	0.303	0.310	
								135	67	24.0	23.7	0.560	0.600	0.295	0.316	245
					Left Tilt	518598	2593.0	1	136	24.0	23.9	0.191	0.195	0.097	0.100	
								135	67	24.0	23.7	0.203	0.218	0.102	0.109	
					Right Touch	518598	2593.0	1	136	24.0	23.9	0.309	0.316	0.170	0.174	
								135	67	24.0	23.7	0.292	0.313	0.160	0.171	
ANT6	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	518598	2593.0	1	136	24.0	23.9	0.289	0.296	0.143	0.146	
								135	67	24.0	23.7	0.285	0.305	0.143	0.153	
					Rear	518598	2593.0	1	136	17.1	16.9	0.553	0.579	0.254	0.266	
								135	67	17.1	16.9	0.553	0.579	0.256	0.268	246
					Front	518598	2593.0	1	136	17.1	16.9	0.484	0.507	0.215	0.225	
								135	67	17.1	16.9	0.454	0.475	0.203	0.213	
ANT7	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	518598	2593.0	1	136	17.1	16.9	0.100	0.104	0.046	0.048	
								135	67	17.1	16.9	0.098	0.102	0.045	0.047	
					Edge 4	518598	2593.0	1	136	17.1	16.9	0.739	0.774	0.308	0.323	247
								135	67	17.1	16.9	0.725	0.759	0.303	0.317	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	518598	2593.0	1	136	19.0	18.4	0.663	0.761	0.348	0.400	248
								135	67	19.0	18.3	0.721	0.847	0.375	0.441	
					Left Tilt	518598	2593.0	1	136	19.0	18.4	0.476	0.547	0.217	0.249	
								135	67	19.0	18.3	0.411	0.483	0.189	0.222	
					Right Touch	518598	2593.0	1	136	19.0	18.4	0.145	0.166	0.080	0.092	
								135	67	19.0	18.3	0.187	0.220	0.103	0.121	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	518598	2593.0	1	136	20.5	20.3	0.666	0.697	0.310	0.325	249
								135	67	20.5	20.3	0.776	0.813	0.394	0.413	
					Front	518598	2593.0	1	136	20.5	20.3	0.297	0.311	0.153	0.160	
								135	67	20.5	20.3	0.298	0.312	0.155	0.162	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	518598	2593.0	1	136	20.5	20.3	0.206	0.216	0.072	0.075	
								135	67	20.5	20.3	0.185	0.194	0.064	0.067	
					Edge 2	518598	2593.0	1	136	20.5	20.3	0.776	0.813	0.315	0.330	
								135	67	20.5	20.3	0.772	0.808	0.320	0.335	

10.28. 5G NR Band n41 Power Class 2 (100MHz Bandwidth)

According to Section 9.4, SAR evaluation for PC2 is only required when its Maximum output power (Tune-up Limit) is higher from PC3.

From May 2017 TCB Workshop, SAR tested were performed using Power Class 3. SAR test for Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination.

Additional SAR testing for Power Class 2 is not required when:

- The reported SAR vs. output power can be linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg

Reported SAR vs. Output Power linearly scaled

Antenna	RF Exposure Conditions	Power Class 2			Power Class 3				PC2 linearly scaled Reported SAR (W/kg)	Linearly scaled (<10%)
		Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Duty Cycle	Tune-up Power (dBm)	Frame Avg. Power (mW)	Reported 1-g SAR (W/kg)		
ANT1	Head	50.0%	27.30	268.52	100.0%	25.70	371.54	0.556	0.402	-27.73%

Conclusion:

SAR test for Power Class 2 is not required based on the reported SAR <1.4 W/kg and reported SAR vs. output power linearly scaled <10%.

10.29. 5G NR Band n53 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	497860	2489.3	1	11	20.7	20.5	0.045	0.047	0.025	0.026	
								12	6	20.7	20.5	0.043	0.045	0.024	0.025	
					Left Tilt	497860	2489.3	1	11	20.7	20.5	0.026	0.027	0.013	0.014	
								12	6	20.7	20.5	0.026	0.027	0.013	0.014	
					Right Touch	497860	2489.3	1	11	20.7	20.5	0.108	0.113	0.057	0.060	
								12	6	20.7	20.5	0.109	0.114	0.057	0.060	250
					Right Tilt	497860	2489.3	1	11	20.7	20.5	0.020	0.021	0.012	0.013	
								12	6	20.7	20.5	0.014	0.015	0.005	0.006	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	497860	2489.3	1	11	20.7	20.5	0.430	0.450	0.175	0.183	251
								12	6	20.7	20.5	0.398	0.417	0.165	0.173	
					Front	497860	2489.3	1	11	20.7	20.5	0.375	0.393	0.149	0.156	
								12	6	20.7	20.5	0.376	0.394	0.150	0.157	
					Edge 2	497860	2489.3	1	11	20.7	20.5	0.432	0.452	0.184	0.193	
								12	6	20.7	20.5	0.435	0.456	0.185	0.194	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	497860	2489.3	1	11	20.7	20.5	0.703	0.736	0.262	0.274	252
								12	6	20.7	20.5	0.669	0.701	0.250	0.262	
					Edge 4	497860	2489.3	1	11	20.7	20.5	0.062	0.065	0.031	0.032	
								12	6	20.7	20.5	0.064	0.067	0.031	0.032	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	497860	2489.3	1	11	20.7	20.7	0.427	0.427	0.166	0.166	
								12	6	20.7	20.7	0.427	0.427	0.164	0.164	
					Left Tilt	497860	2489.3	1	11	20.7	20.7	0.474	0.474	0.178	0.178	
								12	6	20.7	20.7	0.488	0.488	0.182	0.182	
					Right Touch	497860	2489.3	1	11	20.7	20.7	0.756	0.756	0.301	0.301	
								12	6	20.7	20.7	0.859	0.859	0.335	0.335	253
					Right Tilt	497860	2489.3	1	11	20.7	20.7	0.678	0.678	0.249	0.249	
								12	6	20.7	20.7	0.644	0.644	0.238	0.238	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	497860	2489.3	1	11	20.7	20.7	0.511	0.511	0.215	0.215	
								12	6	20.7	20.7	0.539	0.539	0.226	0.226	254
					Front	497860	2489.3	1	11	20.7	20.7	0.360	0.360	0.148	0.148	
								12	6	20.7	20.7	0.399	0.399	0.161	0.161	
					Edge 1	497860	2489.3	1	11	20.7	20.7	0.351	0.351	0.135	0.135	
								12	6	20.7	20.7	0.377	0.377	0.142	0.142	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	497860	2489.3	1	11	20.7	20.7	0.018	0.018	0.006	0.006	
								12	6	20.7	20.7	0.031	0.031	0.016	0.016	
					Edge 4	497860	2489.3	1	11	20.7	20.7	0.664	0.664	0.293	0.293	
								12	6	20.7	20.7	0.699	0.699	0.304	0.304	255

10.30. 5G NR Band n66 (40MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	349000	1745.0	1	107	24.8	24.7	0.067	0.068	0.046	0.047	256
								108	54	24.8	24.7	0.190	0.194	0.124	0.127	
					Left Tilt	349000	1745.0	1	107	24.8	24.7	0.142	0.145	0.087	0.089	
								108	54	24.8	24.7	0.141	0.144	0.085	0.087	
					Right Touch	349000	1745.0	1	107	24.8	24.7	0.128	0.131	0.008	0.008	
								108	54	24.8	24.7	0.132	0.135	0.060	0.061	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	349000	1745.0	1	107	18.1	18.0	0.087	0.089	0.056	0.057	257
								108	54	18.1	18.0	0.597	0.611	0.293	0.300	
					Front	349000	1745.0	1	107	18.1	18.0	0.541	0.554	0.255	0.261	
								108	54	18.1	18.0	0.474	0.485	0.224	0.229	
					Edge 2	349000	1745.0	1	107	18.1	18.0	0.066	0.067	0.034	0.034	
								108	54	18.1	18.0	0.163	0.167	0.085	0.087	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 3	349000	1745.0	1	107	18.1	18.0	0.773	0.791	0.343	0.351	258
								108	54	18.1	18.0	0.829	0.848	0.391	0.400	
					Edge 4	349000	1745.0	1	107	18.1	18.0	0.015	0.016	0.007	0.007	
								108	54	18.1	18.0	0.013	0.014	0.006	0.006	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	349000	1745.0	1	107	21.0	20.5	0.245	0.275	0.130	0.146	259
								108	54	21.0	20.5	0.220	0.247	0.115	0.129	
					Left Tilt	349000	1745.0	1	107	21.0	20.5	0.243	0.273	0.122	0.137	
								108	54	21.0	20.5	0.217	0.243	0.109	0.122	
					Right Touch	349000	1745.0	1	107	21.0	20.5	0.694	0.779	0.363	0.407	
								108	54	21.0	20.5	0.726	0.815	0.368	0.413	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Right Tilt	349000	1745.0	1	107	21.0	20.5	0.529	0.594	0.242	0.272	
								108	54	21.0	20.5	0.515	0.578	0.238	0.267	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	349000	1745.0	1	107	21.3	21.0	0.710	0.761	0.324	0.347	260
								108	54	21.3	21.0	0.820	0.879	0.370	0.396	
					Front	349000	1745.0	1	107	21.3	21.0	0.407	0.436	0.202	0.216	
								108	54	21.3	21.0	0.381	0.408	0.191	0.205	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 1	349000	1745.0	1	107	21.3	21.0	0.486	0.521	0.229	0.245	261
								108	54	21.3	21.0	0.483	0.518	0.204	0.219	
					Edge 2	349000	1745.0	1	107	21.3	21.0	0.003	0.003	0.001	0.001	
								108	54	21.3	21.0	0.009	0.009	0.004	0.004	
					Edge 4	349000	1745.0	1	107	21.3	21.0	0.340	0.364	0.173	0.185	
								108	54	21.3	21.0	0.333	0.357	0.167	0.179	
ANT5	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	349000	1745.0	1	107	25.5	25.1	0.409	0.448	0.260	0.285	262
								108	54	25.5	25.0	0.384	0.431	0.246	0.276	
					Left Tilt	349000	1745.0	1	107	25.5	25.1	0.172	0.189	0.108	0.118	
								108	54	25.5	25.0	0.162	0.182	0.101	0.113	
					Right Touch	349000	1745.0	1	107	25.5	25.1	0.184	0.202	0.118	0.129	
								108	54	25.5	25.0	0.168	0.188	0.107	0.120	
ANT6	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	349000	1745.0	1	107	25.5	25.1	0.160	0.175	0.097	0.107	
								108	54	25.5	25.0	0.148	0.166	0.091	0.102	
					Rear	349000	1745.0	1	107	21.5	21.0	0.741	0.831	0.394	0.442	262
								108	54	21.5	21.1	0.711	0.780	0.385	0.422	
					Front	349000	1745.0	1	107	21.5	21.0	0.198	0.222	0.114	0.128	
								108	54	21.5	21.1	0.286	0.314	0.164	0.180	
ANT7	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	349000	1745.0	1	107	21.5	21.0	0.161	0.181	0.068	0.076	
								108	54	21.5	21.1	0.214	0.235	0.087	0.096	
					Edge 4	349000	1745.0	1	107	21.5	21.0	0.671	0.753	0.354	0.397	
								108	54	21.5	21.1	0.612	0.671	0.330	0.362	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	349000	1745.0	1	107	19.1	18.9	0.627	0.657	0.332	0.348	
								108	54	19.1	18.8	0.797	0.854	0.416	0.446	263
					Left Tilt	349000	1745.0	1	107	19.1	18.9	0.405	0.424	0.193	0.202	
								108	54	19.1	18.8	0.409	0.438	0.193	0.207	
					Right Touch	349000	1745.0	1	107	19.1	18.9	0.205	0.215	0.117	0.123	
								108	54	19.1	18.8	0.224	0.240	0.128	0.137	
					Right Tilt	349000	1745.0	1	107	19.1	18.9	0.145	0.152	0.081	0.085	
								108	54	19.1	18.8	0.179	0.192	0.100	0.107	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	349000	1745.0	1	107	19.3	18.8	0.525	0.589	0.282	0.316	264
								108	54	19.3	18.7	0.437	0.502	0.229	0.263	
					Front	349000	1745.0	1	107	19.3	18.8	0.254	0.285	0.136	0.153	
								108	54	19.3	18.7	0.226	0.259	0.122	0.140	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	349000	1745.0	1	107	19.3	18.8	0.256	0.287	0.114	0.128	
								108	54	19.3	18.7	0.268	0.308	0.120	0.138	
					Edge 2	349000	1745.0	1	107	19.3	18.8	0.687	0.771	0.339	0.380	
								108	54	19.3	18.7	0.736	0.845	0.352	0.404	265

10.31. 5G NR Band n70 (15MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	340500	1702.5	1	39	24.8	24.2	0.058	0.067	0.038	0.044	
								36	18	24.8	24.2	0.034	0.039	0.022	0.026	
					Left Tilt	340500	1702.5	1	39	24.8	24.2	0.041	0.047	0.025	0.028	
								36	18	24.8	24.2	0.048	0.055	0.028	0.032	
					Right Touch	340500	1702.5	1	39	24.8	24.2	0.151	0.173	0.094	0.107	266
								36	18	24.8	24.2	0.136	0.156	0.086	0.099	
					Right Tilt	340500	1702.5	1	39	24.8	24.2	0.039	0.045	0.025	0.028	
								36	18	24.8	24.2	0.039	0.045	0.025	0.028	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	340500	1702.5	1	39	18.1	17.8	0.543	0.582	0.262	0.281	
								36	18	18.1	17.8	0.472	0.506	0.234	0.251	
					Front	340500	1702.5	1	39	18.1	17.8	0.438	0.469	0.207	0.222	
								36	18	18.1	17.8	0.552	0.591	0.254	0.272	
					Edge 2	340500	1702.5	1	39	18.1	17.8	0.084	0.090	0.042	0.045	
								36	18	18.1	17.8	0.102	0.109	0.050	0.054	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	340500	1702.5	1	39	18.1	17.8	0.714	0.765	0.330	0.354	
								36	18	18.1	17.8	0.760	0.814	0.351	0.376	
					Edge 4	340500	1702.5	1	39	18.1	17.8	0.056	0.060	0.029	0.031	
								36	18	18.1	17.8	0.010	0.011	0.004	0.005	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	340500	1702.5	1	39	21.0	20.4	0.285	0.327	0.144	0.165	
								36	18	21.0	20.4	0.302	0.347	0.151	0.173	
					Left Tilt	340500	1702.5	1	39	21.0	20.4	0.377	0.433	0.184	0.211	
								36	18	21.0	20.4	0.443	0.509	0.216	0.248	
					Right Touch	340500	1702.5	1	39	21.0	20.4	0.723	0.830	0.350	0.402	269
								36	18	21.0	20.4	0.614	0.705	0.315	0.362	
					Right Tilt	340500	1702.5	1	39	21.0	20.4	0.712	0.817	0.339	0.389	
								36	18	21.0	20.4	0.649	0.745	0.316	0.363	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	340500	1702.5	1	39	21.3	21.1	0.705	0.738	0.342	0.358	
								36	18	21.3	21.0	0.778	0.834	0.376	0.403	
					Front	340500	1702.5	1	39	21.3	21.1	0.426	0.446	0.216	0.226	
								36	18	21.3	21.0	0.572	0.613	0.281	0.301	
					Edge 1	340500	1702.5	1	39	21.3	21.1	0.778	0.815	0.360	0.377	
								36	18	21.3	21.0	0.753	0.807	0.350	0.375	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	340500	1702.5	1	39	21.3	21.1	0.004	0.004	0.002	0.002	
								36	18	21.3	21.0	0.001	0.001	0.000	0.000	
					Edge 4	340500	1702.5	1	39	21.3	21.1	0.405	0.424	0.217	0.227	
								36	18	21.3	21.0	0.494	0.529	0.238	0.255	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	340500	1702.5	1	39	25.5	24.8	0.104	0.122	0.068	0.079	
								36	18	25.5	24.7	0.112	0.135	0.073	0.088	
					Left Tilt	340500	1702.5	1	39	25.5	24.8	0.065	0.076	0.041	0.048	
								36	18	25.5	24.7	0.061	0.074	0.040	0.048	
					Right Touch	340500	1702.5	1	39	25.5	24.8	0.059	0.069	0.038	0.045	
								36	18	25.5	24.7	0.057	0.068	0.036	0.043	
					Right Tilt	340500	1702.5	1	39	25.5	24.8	0.058	0.068	0.036	0.042	
								36	18	25.5	24.7	0.059	0.071	0.037	0.044	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	340500	1702.5	1	39	21.5	21.1	0.404	0.443	0.212	0.232	
								36	18	21.5	21.0	0.628	0.705	0.342	0.384	
					Front	340500	1702.5	1	39	21.5	21.1	0.244	0.268	0.139	0.152	
								36	18	21.5	21.0	0.254	0.285	0.143	0.160	
					Edge 3	340500	1702.5	1	39	21.5	21.1	0.044	0.048	0.015	0.017	
								36	18	21.5	21.0	0.045	0.050	0.016	0.018	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 4	340500	1702.5	1	39	21.5	21.1	0.361	0.396	0.192	0.211	
								36	18	21.5	21.0	0.326	0.366	0.175	0.196	

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	340500	1702.5	1	39	19.1	18.6	0.796	0.893	0.411	0.461	273
								36	18	19.1	18.6	0.675	0.757	0.345	0.387	
					Left Tilt	340500	1702.5	1	39	19.1	18.6	0.333	0.374	0.160	0.180	
								36	18	19.1	18.6	0.464	0.521	0.224	0.251	
					Right Touch	340500	1702.5	1	39	19.1	18.6	0.252	0.283	0.147	0.165	
								36	18	19.1	18.6	0.231	0.259	0.134	0.150	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	340500	1702.5	1	39	19.3	18.6	0.348	0.409	0.187	0.220	
								36	18	19.3	18.6	0.487	0.572	0.260	0.305	274
					Front	340500	1702.5	1	39	19.3	18.6	0.249	0.293	0.131	0.154	
								36	18	19.3	18.6	0.303	0.356	0.156	0.183	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	340500	1702.5	1	39	19.3	18.6	0.224	0.263	0.094	0.110	
								36	18	19.3	18.6	0.211	0.248	0.089	0.105	
					Edge 2	340500	1702.5	1	39	19.3	18.6	0.667	0.784	0.310	0.364	275
								36	18	19.3	18.6	0.593	0.697	0.286	0.336	

10.32. 5G NR Band n71 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT1	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	136100	680.5	1	52	25.7	25.2	0.157	0.176	0.123	0.138	276
								50	25	25.7	25.0	0.099	0.116	0.076	0.089	
					Left Tilt	136100	680.5	1	52	25.7	25.2	0.050	0.056	0.030	0.034	
								50	25	25.7	25.0	0.031	0.036	0.017	0.020	
					Right Touch	136100	680.5	1	52	25.7	25.2	0.146	0.164	0.092	0.103	
								50	25	25.7	25.0	0.104	0.122	0.079	0.093	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	136100	680.5	1	52	25.7	25.2	0.069	0.077	0.053	0.059	
								50	25	25.7	25.0	0.047	0.055	0.035	0.041	
					Front	136100	680.5	1	52	25.7	25.2	0.294	0.330	0.181	0.203	
								50	25	25.7	25.0	0.300	0.352	0.186	0.219	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	136100	680.5	1	52	25.7	25.2	0.679	0.762	0.449	0.504	
								50	25	25.7	25.0	0.727	0.854	0.470	0.552	278
ANT2	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 3	136100	680.5	1	52	25.7	25.2	0.312	0.350	0.147	0.165	
								50	25	25.7	25.0	0.325	0.382	0.150	0.176	
					Edge 4	136100	680.5	1	52	25.7	25.2	0.285	0.320	0.186	0.209	
								50	25	25.7	25.0	0.301	0.354	0.195	0.229	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	136100	680.5	1	52	24.7	24.4	0.543	0.582	0.285	0.305	
								50	25	24.7	24.2	0.544	0.610	0.290	0.325	
					Left Tilt	136100	680.5	1	52	24.7	24.4	0.565	0.605	0.269	0.288	
								50	25	24.7	24.2	0.591	0.663	0.281	0.315	279
					Right Touch	136100	680.5	1	52	24.7	24.4	0.561	0.601	0.322	0.345	
								50	25	24.7	24.2	0.570	0.640	0.325	0.365	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Tilt	136100	680.5	1	52	24.7	24.4	0.458	0.491	0.254	0.272	
								50	25	24.7	24.2	0.446	0.500	0.244	0.274	
					Rear	136100	680.5	1	52	24.7	24.4	0.454	0.486	0.244	0.261	
								50	25	24.7	24.2	0.515	0.578	0.276	0.310	280
					Front	136100	680.5	1	52	24.7	24.4	0.257	0.275	0.149	0.160	
								50	25	24.7	24.2	0.244	0.274	0.144	0.162	

10.33. 5G NR Band n77 (Block A)(100MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT7	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	633332	3500.0	1	136	25.5	25.2	0.224	0.240	0.070	0.075	
								135	67	25.5	25.2	0.248	0.266	0.076	0.081	
					Left Tilt	633332	3500.0	1	136	25.5	25.2	0.134	0.144	0.048	0.052	
								135	67	25.5	25.2	0.140	0.150	0.046	0.049	
					Right Touch	633332	3500.0	1	136	25.5	25.2	0.401	0.430	0.157	0.168	
								135	67	25.5	25.2	0.498	0.534	0.188	0.201	
					Right Tilt	633332	3500.0	1	136	25.5	25.2	0.088	0.095	0.033	0.035	281
								135	67	25.5	25.2	0.088	0.094	0.031	0.033	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	633332	3500.0	1	136	19.0	19.0	0.566	0.573	0.218	0.221	282
								135	67	19.0	19.0	0.538	0.544	0.208	0.210	
					Front	633332	3500.0	1	136	19.0	19.0	0.410	0.415	0.154	0.156	
								135	67	19.0	19.0	0.396	0.401	0.149	0.151	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 2	633332	3500.0	1	136	19.0	19.0	0.824	0.834	0.308	0.312	
								135	67	19.0	19.0	0.928	0.939	0.342	0.346	
					Edge 3	633332	3500.0	1	136	19.0	19.0	0.412	0.417	0.149	0.151	
								135	67	19.0	19.0	0.466	0.471	0.164	0.166	
ANT8	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	633332	3500.0	1	136	19.2	18.8	0.273	0.299	0.079	0.087	
								135	67	19.2	18.8	0.352	0.386	0.104	0.114	
					Left Tilt	633332	3500.0	1	136	19.2	18.8	0.356	0.390	0.093	0.102	
								135	67	19.2	18.8	0.312	0.342	0.082	0.090	
					Right Touch	633332	3500.0	1	136	19.2	18.8	0.325	0.356	0.096	0.105	
								135	67	19.2	18.8	0.326	0.357	0.099	0.109	
					Right Tilt	633332	3500.0	1	136	19.2	18.8	0.357	0.391	0.094	0.103	284
								135	67	19.2	18.8	0.333	0.365	0.092	0.100	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	633332	3500.0	1	136	18.5	18.1	0.436	0.478	0.146	0.160	285
								135	67	18.5	18.1	0.368	0.404	0.137	0.150	
					Front	633332	3500.0	1	136	18.5	18.1	0.084	0.092	0.025	0.027	
								135	67	18.5	18.1	0.081	0.089	0.024	0.026	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	633332	3500.0	1	136	18.5	18.1	0.208	0.228	0.061	0.067	
								135	67	18.5	18.1	0.162	0.178	0.047	0.052	
					Edge 4	633332	3500.0	1	136	18.5	18.1	0.153	0.168	0.049	0.054	
								135	67	18.5	18.1	0.145	0.159	0.047	0.052	
ANT9	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	633332	3500.0	1	136	25.5	24.9	0.221	0.254	0.099	0.114	
								135	67	25.5	24.7	0.224	0.269	0.105	0.126	
					Left Tilt	633332	3500.0	1	136	25.5	24.9	0.066	0.076	0.030	0.034	
								135	67	25.5	24.7	0.059	0.071	0.027	0.032	
					Right Touch	633332	3500.0	1	136	25.5	24.9	0.249	0.286	0.111	0.127	286
								135	67	25.5	24.7	0.236	0.284	0.107	0.129	
					Right Tilt	633332	3500.0	1	136	25.5	24.9	0.112	0.129	0.048	0.055	
								135	67	25.5	24.7	0.124	0.149	0.053	0.064	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	633332	3500.0	1	136	18.8	18.4	0.364	0.399	0.134	0.147	
								135	67	18.8	18.3	0.376	0.422	0.138	0.155	
					Front	633332	3500.0	1	136	18.8	18.4	0.650	0.713	0.272	0.298	
								135	67	18.8	18.3	0.648	0.727	0.274	0.307	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	633332	3500.0	1	136	18.8	18.4	0.132	0.145	0.050	0.054	
								135	67	18.8	18.3	0.134	0.150	0.048	0.054	
					Edge 4	633332	3500.0	1	136	18.8	18.4	0.794	0.871	0.268	0.294	288
								135	67	18.8	18.3	0.754	0.846	0.256	0.287	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	633332	3500.0	1	136	18.1	17.5	0.800	0.919	0.272	0.312	289
								135	67	18.1	17.5	0.730	0.838	0.258	0.296	
					Left Tilt	633332	3500.0	1	136	18.1	17.5	0.411	0.472	0.144	0.165	
								135	67	18.1	17.5	0.296	0.340	0.104	0.119	
					Right Touch	633332	3500.0	1	136	18.1	17.5	0.113	0.130	0.041	0.048	
								135	67	18.1	17.5	0.129	0.148	0.048	0.055	
					Right Tilt	633332	3500.0	1	136	18.1	17.5	0.118	0.135	0.041	0.047	
								135	67	18.1	17.5	0.111	0.127	0.037	0.042	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	633332	3500.0	1	136	18.7	18.0	0.808	0.949	0.298	0.350	290
								135	67	18.7	18.0	0.690	0.811	0.255	0.300	
					Front	633332	3500.0	1	136	18.7	18.0	0.284	0.334	0.111	0.130	
								135	67	18.7	18.0	0.275	0.323	0.108	0.127	
	Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 1	633332	3500.0	1	136	18.7	18.0	0.044	0.052	0.016	0.019	
								135	67	18.7	18.0	0.046	0.055	0.017	0.020	
					Edge 2	633332	3500.0	1	136	18.7	18.0	0.480	0.564	0.163	0.192	
								135	67	18.7	18.0	0.484	0.569	0.166	0.195	

10.34. 5G NR Band n77 (Block C)(100MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT7	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Left Touch	656000	3840.0	1	136	25.5	25.3	0.153	0.160	0.048	0.050	291
								135	67	25.5	25.3	0.161	0.169	0.045	0.047	
					Left Tilt	656000	3840.0	1	136	25.5	25.3	0.146	0.153	0.049	0.051	
								135	67	25.5	25.3	0.143	0.150	0.049	0.051	
					Right Touch	656000	3840.0	1	136	25.5	25.3	0.356	0.373	0.117	0.123	
								135	67	25.5	25.3	0.327	0.342	0.104	0.109	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Rear	656000	3840.0	1	136	19.0	18.3	0.300	0.352	0.126	0.148	292
								135	67	19.0	18.3	0.268	0.315	0.112	0.132	
					Front	656000	3840.0	1	136	19.0	18.3	0.182	0.214	0.069	0.081	
								135	67	19.0	18.3	0.173	0.203	0.066	0.078	
					Edge 2	656000	3840.0	1	136	19.0	18.3	0.488	0.573	0.177	0.208	293
								135	67	19.0	18.3	0.373	0.438	0.147	0.173	
ANT8	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Edge 3	656000	3840.0	1	136	19.0	18.3	0.080	0.094	0.024	0.028	294
								135	67	19.0	18.3	0.074	0.087	0.023	0.027	
					Left Touch	656000	3840.0	1	136	19.2	18.9	0.357	0.383	0.114	0.122	
								135	67	19.2	18.8	0.333	0.365	0.107	0.117	
					Left Tilt	656000	3840.0	1	136	19.2	18.9	0.328	0.351	0.098	0.105	
								135	67	19.2	18.8	0.334	0.366	0.097	0.107	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Right Touch	656000	3840.0	1	136	19.2	18.9	0.829	0.888	0.271	0.290	295
								135	67	19.2	18.8	0.854	0.936	0.273	0.299	
					Right Tilt	656000	3840.0	1	136	19.2	18.9	0.478	0.512	0.154	0.165	
								135	67	19.2	18.8	0.461	0.505	0.148	0.162	
					Rear	656000	3840.0	1	136	18.5	17.7	0.343	0.412	0.146	0.176	296
								135	67	18.5	17.7	0.326	0.392	0.134	0.161	
ANT9	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Front	656000	3840.0	1	136	18.5	17.7	0.176	0.212	0.055	0.066	297
								135	67	18.5	17.7	0.216	0.260	0.072	0.087	
					Edge 1	656000	3840.0	1	136	18.5	17.7	0.217	0.261	0.068	0.082	
								135	67	18.5	17.7	0.215	0.258	0.066	0.079	
					Edge 4	656000	3840.0	1	136	18.5	17.7	0.706	0.849	0.246	0.296	298
								135	67	18.5	17.7	0.700	0.842	0.243	0.292	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Left Touch	656000	3840.0	1	136	25.5	25.0	0.142	0.159	0.043	0.048	299
								135	67	25.5	24.9	0.140	0.161	0.046	0.052	
					Left Tilt	656000	3840.0	1	136	25.5	25.0	0.032	0.036	0.010	0.012	
								135	67	25.5	24.9	0.034	0.039	0.010	0.012	
					Right Touch	656000	3840.0	1	136	25.5	25.0	0.096	0.108	0.030	0.034	
								135	67	25.5	24.9	0.084	0.097	0.025	0.029	
ANT4	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Right Tilt	656000	3840.0	1	136	25.5	25.0	0.054	0.061	0.015	0.017	300
								135	67	25.5	24.9	0.046	0.053	0.014	0.016	
					Rear	656000	3840.0	1	136	18.8	18.3	0.332	0.373	0.120	0.135	
								135	67	18.8	18.3	0.322	0.361	0.115	0.129	
					Front	656000	3840.0	1	136	18.8	18.3	0.390	0.438	0.157	0.176	301
								135	67	18.8	18.3	0.330	0.370	0.133	0.149	
	Body & Hotspot	DFT-s-OFDM $\pi/2$ BPSK	Mode B	5	Edge 3	656000	3840.0	1	136	18.8	18.3	0.231	0.259	0.081	0.091	
								135	67	18.8	18.3	0.185	0.208	0.066	0.074	
					Edge 4	656000	3840.0	1	136	18.8	18.3	0.523	0.587	0.181	0.203	
								135	67	18.8	18.3	0.526	0.591	0.180	0.202	
					Edge 1	656000	3840.0	1	136	18.7	17.7	0.449	0.565	0.151	0.190	302
								135	67	18.7	17.7	0.504	0.634	0.166	0.209	
ANT5	Head	DFT-s-OFDM $\pi/2$ BPSK	Mode A	0	Front	656000	3840.0	1	136	18.7	17.7	0.195	0.245	0.066	0.083	303
								135	67	18.7	17.7	0.140	0.176	0.054	0.068	
					Edge 2	656000	3840.0	1	136	18.7	17.7	0.090	0.113	0.035	0.044	
								135	67	18.7	17.7	0.088	0.111	0.034	0.043	
					Edge 3	656000	3840.0	1	136	18.7	17.7	0.535	0.674	0.192	0.242	304
								135	67	18.7	17.7	0.531	0.668	0.192	0.242	

10.35. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Antenna	WWAN Power	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
											Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Cell OFF	Head	802.11b	Mode A	0	Left Touch	6	2437	0.408	98.9%	21.50	20.05					137
						Left Tilt	6	2437	0.158	98.9%	21.50	20.05	0.337	0.476	0.178	0.251	
						Right Touch	6	2437	0.223	98.9%	21.50	20.05					
						Right Tilt	6	2437	0.226	98.9%	21.50	20.05					
		Body & Hotspot	802.11b	Mode B	5	Rear	6	2437	0.386	98.9%	18.25	16.61	0.473	0.698	0.229	0.338	138
						Front	6	2437	0.963	98.9%	18.25	16.61					
						Edge 3	6	2437	0.599	98.9%	18.25	16.61					
						Edge 4	1	2412	0.786	98.9%	18.25	16.55	0.601	0.899	0.243	0.364	
		Hotspot	802.11b	Mode B	5	Edge 4	6	2437	0.386	98.9%	18.25	16.61	0.702	1.036	0.312	0.460	139
						Edge 4	11	2462	0.184	98.9%	18.25	16.52	0.628	0.946	0.260	0.392	
Antenna	WWAN Power	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
											Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT4	Cell OFF	Head	802.11b	Mode A	0	Left Touch	1	2412	1.360	98.9%	19.75	18.01	0.748	1.129	0.340	0.513	140
						Left Touch	6	2437	0.953	98.9%	19.75	18.28	0.758	1.076	0.368	0.522	
						Left Touch	11	2462	0.770	98.9%	19.75	17.86	0.725	1.133	0.330	0.516	
						Left Tilt	6	2437	0.612	98.9%	19.75	18.28	0.365	0.518	0.165	0.234	
						Right Touch	6	2437	0.186	98.9%	19.75	18.28					
						Right Tilt	6	2437	0.212	98.9%	19.75	18.28					
		Body & Hotspot	802.11b	Mode B	5	Rear	2	2417	1.480	98.9%	21.50	20.01	0.744	1.061	0.386	0.550	141
						Rear	6	2437	1.320	98.9%	21.50	20.03	0.749	1.063	0.403	0.572	
						Rear	11	2462	1.380	98.9%	21.50	20.02	0.674	0.959	0.328	0.467	
						Front	6	2437	0.639	98.9%	21.50	20.03					
		Hotspot	802.11b	Mode B	5	Edge 1	6	2437	0.150	98.9%	21.50	20.03					142
						Edge 2	2	2417	1.170	98.9%	21.50	20.01	0.797	1.136	0.354	0.505	
						Edge 2	6	2437	1.330	98.9%	21.50	20.03	0.804	1.141	0.359	0.509	
						Edge 2	11	2462	1.680	98.9%	21.50	20.02	0.799	1.136	0.322	0.458	
Antenna	WWAN Power	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
											Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3	Cell ON	Head	802.11b	Mode A	0	Left Touch	6	2437	0.282	98.9%	19.50	18.38	0.183	0.240	0.096	0.126	143
						Left Tilt	6	2437	0.034	98.9%	19.50	18.38					
						Right Touch	6	2437	0.141	98.9%	19.50	18.38					
						Right Tilt	6	2437	0.161	98.9%	19.50	18.38					
		Body & Hotspot	802.11b	Mode B	5	Rear	6	2437	0.591	98.9%	15.00	13.78	0.353	0.473	0.163	0.218	144
						Front	6	2437	0.337	98.9%	15.00	13.78					
						Edge 3	6	2437	0.181	98.9%	15.00	13.78					
						Edge 4	6	2437	0.451	98.9%	15.00	13.78	0.250	0.335	0.109	0.146	
ANT4	Cell ON	Head	802.11b	Mode A	0	Left Touch	6	2437	0.412	98.9%	15.00	13.44	0.280	0.406	0.182	0.264	145
						Left Tilt	6	2437	0.603	98.9%	15.00	13.44	0.154	0.223	0.071	0.103	
						Right Touch	6	2437	0.118	98.9%	15.00	13.44					
						Right Tilt	6	2437	0.124	98.9%	15.00	13.44					
		Body & Hotspot	802.11b	Mode B	5	Rear	6	2437	0.585	98.9%	18.25	16.93	0.264	0.362	0.129	0.177	146
						Front	6	2437	0.405	98.9%	18.25	16.93					
		Hotspot	802.11b	Mode B	5	Edge 1	6	2437	0.117	98.9%	18.25	16.93					147
						Edge 2	6	2437	0.492	98.9%	18.25	16.93	0.398	0.546	0.176	0.241	

10.36. Wi-Fi (U-NII Band)

Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.		
												Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled			
ANT5	Cell OFF	U-NII-2A	Head	802.11n (HT40)	Mode A	0	Left Touch	54	5270	0.166	95.6%	20.50	19.32							
							Left Tilt	54	5270	0.053	95.6%	20.50	19.32							
							Right Touch	54	5270	0.260	95.6%	20.50	19.32	0.130	0.178	0.033	0.045	148		
							Right Tilt	54	5270	0.059	95.6%	20.50	19.32							
			Body & Airplay	802.11n (HT40)	Mode B	5	Rear	54	5270	1.800	95.6%	19.00	17.64	0.747	1.069	0.257	0.368	149		
							Rear	62	5310	1.160	95.6%	17.00	15.84	0.539	0.737	0.169	0.231			
							Front	54	5270	0.113	95.6%	19.00	17.64							
			Airplay	802.11n (HT40)	Mode B	5	Edge 3	54	5270	0.444	95.6%	19.00	17.64	0.196	0.281	0.064	0.092			
Edge 4	54	5270					0.266	95.6%	19.00	17.64										
Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.		
												Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled			
ANT5	Cell OFF	U-NII-2C	Head	802.11ac (VHT80)	Mode A	0	Left Touch	122	5610	0.130	95.4%	20.50	19.46	0.052	0.069	0.013	0.017	150		
							Left Tilt	122	5610	0.068	95.4%	20.50	19.46							
							Right Touch	122	5610	0.105	95.4%	20.50	19.46							
							Right Tilt	122	5610	0.023	95.4%	20.50	19.46							
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	106	5530	1.860	95.4%	16.00	15.29	0.881	1.087	0.266	0.328			
							Rear	122	5610	2.300	95.4%	16.25	15.42	0.900	1.142	0.290	0.368	151		
							Rear	138	5690	2.590	95.4%	16.25	15.34	0.854	1.104	0.273	0.353			
							Front	122	5610	0.331	95.4%	16.25	15.42							
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 3	122	5610	0.514	95.4%	16.25	15.42	0.208	0.264	0.069	0.088			
							Edge 4	122	5610	0.292	95.4%	16.25	15.42							
Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.		
												Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled			
ANT5	Cell OFF	U-NII-3	Head	802.11a	Mode A	0	Left Touch	157	5785	0.212	97.6%	21.50	20.53	0.065	0.083	0.017	0.022	152		
							Left Tilt	157	5785	0.064	97.6%	21.50	20.53							
							Right Touch	157	5785	0.144	97.6%	21.50	20.53							
							Right Tilt	157	5785	0.099	97.6%	21.50	20.53							
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	155	5775	1.730	95.4%	16.25	14.86	0.782	1.129	0.252	0.364	153		
							Front	155	5775	0.024	95.4%	16.25	14.86							
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 3	155	5775	0.499	95.4%	16.25	14.86	0.252	0.364	0.079	0.114			
							Edge 4	155	5775	0.110	95.4%	16.25	14.86							
Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.		
												Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled			
ANT6	Cell OFF	U-NII-2A	Head	802.11n (HT40)	Mode A	0	Left Touch	54	5270	0.698	95.6%	18.75	17.81							
							Left Tilt	54	5270	0.977	95.6%	18.75	17.81							
							Right Touch	54	5270	2.050	95.6%	18.75	17.81	0.821	1.067	0.289	0.375			
							Right Touch	62	5310	2.130	95.6%	17.00	15.57	0.738	1.073	0.237	0.345			
							Right Tilt	54	5270	2.000	95.6%	18.75	17.81	0.876	1.138	0.269	0.349	154		
							Right Tilt	62	5310	2.330	95.6%	17.00	15.57	0.105	0.153	0.266	0.387			
		U-NII-1	Body & Airplay	802.11n (HT40)	Mode B	5	Rear	38	5190	1.810	95.6%	17.50	16.38	0.719	0.974	0.513	0.695			
							Rear	46	5230	2.070	95.6%	18.75	17.62	0.845	1.147	0.227	0.308	155		
							Front	46	5230	0.739	95.6%	18.75	17.62							
			Airplay	802.11n (HT40)	Mode B	5	Edge 1	46	5230	0.566	95.6%	18.75	17.62							
							Edge 4	38	5190	1.230	95.6%	17.50	16.38	0.529	0.716	0.162	0.219			
			Edge 4	46	5230	1.780	95.6%	18.75	17.62	0.694	0.942	0.208	0.282							
		Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
														Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT6	Cell OFF	U-NII-2C	Head	802.11ac (VHT80)	Mode A	0	Left Touch	122	5610	0.699	95.4%	18.75	17.88							
							Left Tilt	122	5610	0.614	95.4%	18.75	17.88							
							Right Touch	106	5530	1.230	95.4%	16.00	14.88	0.500	0.678	0.171	0.232			
							Right Touch	122	5610	2.260	95.4%	18.75	17.88	0.838	1.073	0.282	0.361			
							Right Touch	138	5690	1.790	95.4%	18.75	17.75	0.866	1.142	0.300	0.396	156		
							Right Tilt	122	5610	1.530	95.4%	18.75	17.88	0.720	0.922	0.239	0.306			
			U-NII-1	Body & Airplay	802.11ac (VHT80)	Mode B	5	Right Tilt	138	5690	1.830	95.4%	18.75	17.75	0.859	1.133	0.304	0.401		
								Rear	122	5610	1.060	95.4%	17.75	16.44	0.540	0.765	0.171	0.242	157	
								Front	122	5610	0.520	95.4%	17.75	16.44						
				Airplay	802.11ac (VHT80)	Mode B	5	Edge 1	122	5610	0.047	95.4%	17.75	16.44						
								Edge 4	106	5530	1.310	95.4%	16.00	14.88	0.489	0.663	0.138	0.187		
				Edge 4	122	5610	1.750	95.4%	17.75	16.44	0.754	1.068	0.205	0.290	158					
			Edge 4	138	5690	1.510	95.4%	17.75	16.51	0.700	0.976	0.195	0.272							
			Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)	
Tune-up Limit	Meas.	Meas.													Scaled	Meas.	Scaled			
ANT6	Cell OFF	U-NII-3	Head	802.11ac (VHT80)	Mode A	0	Left Touch	155	5775	0.561	95.4%	20.00	18.32							
							Left Tilt	155	5775	0.530	95.4%	20.00	18.32							
							Right Touch	155	5775	1.770	95.4%	20.00	18.32	0.745	1.149	0.265	0.409	159		
							Right Tilt	155	5775	1.740	95.4%	20.00	18.32	0.674	1.040	0.233	0.359			
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	155	5775	1.730	95.4%	17.50	16.24	0.814	1.140	0.246	0.345	160		
							Front	155	5775	0.169	95.4%	17.50	16.24							
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 1	155	5775	0.390	95.4%	17.50	16.24							
							Edge 4	155	5775	2.090	95.4%	17.50	16.24	0.518	0.726	0.156	0.218			

Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
												Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT5	Cell ON	U-NII-2A	Head	802.11n (VHT40)	Mode A	0	Left Touch	54	5270	0.166	95.6%	19.25	18.04					
							Left Tilt	54	5270	0.053	95.6%	19.25	18.04					
							Right Touch	54	5270	0.260	95.6%	19.25	18.04	0.130	0.180	0.033	0.046	161
							Right Tilt	54	5270	0.059	95.6%	19.25	18.04					
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	58	5290	1.000	95.4%	15.25	13.96	0.317	0.447	0.094	0.133	162
							Front	58	5290	0.037	95.4%	15.25	13.96					
							Edge 3	58	5290	0.187	95.4%	15.25	13.96					
							Edge 4	58	5290	0.104	95.4%	15.25	13.96	0.120	0.169	0.045	0.063	
Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT5	Cell ON	U-NII-2C	Head	802.11ac (VHT80)	Mode A	0	Left Touch	122	5610	0.164	95.4%	19.25	18.21					
							Left Tilt	122	5610	0.047	95.4%	19.25	18.21					
							Right Touch	122	5610	0.174	95.4%	19.25	18.21	0.040	0.053	0.009	0.353	163
							Right Tilt	122	5610	0.021	95.4%	19.25	18.21					
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	122	5610	0.842	95.4%	12.75	11.58	0.339	0.465	0.104	0.143	164
							Front	122	5610	0.030	95.4%	12.75	11.58					
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 3	122	5610	0.145	95.4%	12.75	11.58	0.078	0.107	0.026	0.036	
							Edge 4	122	5610	0.143	95.4%	12.75	11.58					
Antenna	WWAN Power	Band	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT5	Cell ON	U-NII-3	Head	802.11ac (VHT80)	Mode A	0	Left Touch	155	5775	0.047	95.4%	19.50	17.89	0.027	0.041	0.007	0.011	165
							Left Tilt	155	5775	0.027	95.4%	19.50	17.89					
							Right Touch	155	5775	0.117	95.4%	19.50	17.89					
							Right Tilt	155	5775	0.048	95.4%	19.50	17.89					
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	155	5775	0.798	95.4%	12.50	11.28	0.331	0.459	0.094	0.130	166
							Front	155	5775	0.024	95.4%	12.50	11.28					
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 3	155	5775	0.204	95.4%	12.50	11.28	0.117	0.162	0.035	0.048	
							Edge 4	155	5775	0.129	95.4%	12.50	11.28					
Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT6	Cell ON	U-NII-2A	Head	802.11ac (VHT80)	Mode A	0	Left Touch	58	5290	0.132	95.4%	13.25	12.07					
							Left Tilt	58	5290	0.244	95.4%	13.25	12.07					
							Right Touch	58	5290	0.684	95.4%	13.25	12.07	0.245	0.337	0.095	0.131	167
							Right Tilt	58	5290	0.280	95.4%	13.25	12.07					
		U-NII-1	Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	42	5210	0.617	95.4%	15.00	13.62	0.315	0.454	0.092	0.132	168
							Front	42	5210	0.202	95.4%	15.00	13.62					
							Edge 1	42	5210	0.145	95.4%	15.00	13.62					
							Edge 4	42	5210	0.589	95.4%	15.00	13.62	0.243	0.350	0.073	0.105	
Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT6	Cell ON	U-NII-2C	Head	802.11ac (VHT80)	Mode A	0	Left Touch	122	5610	0.131	95.4%	13.00	11.83					
							Left Tilt	122	5610	0.111	95.4%	13.00	11.83					
							Right Touch	122	5610	0.683	95.4%	13.00	11.83	0.244	0.335	0.081	0.111	169
							Right Tilt	122	5610	0.346	95.4%	13.00	11.83					
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	122	5610	0.635	95.4%	14.00	12.45	0.291	0.436	0.083	0.124	170
							Front	122	5610	0.295	95.4%	14.00	12.45	0.075	0.112	0.022	0.033	
							Edge 1	122	5610	0.148	95.4%	14.00	12.45					
							Edge 4	122	5610	0.009	95.4%	14.00	12.45					
Antenna	WWAN Power	Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
ANT6	Cell ON	U-NII-3	Head	802.11ac (VHT80)	Mode A	0	Left Touch	155	5775	0.234	95.4%	14.50	12.81					
							Left Tilt	155	5775	0.179	95.4%	14.50	12.81					
							Right Touch	155	5775	0.612	95.4%	14.50	12.81	0.229	0.354	0.073	0.112	171
							Right Tilt	155	5775	0.533	95.4%	14.50	12.81					
			Body & Airplay	802.11ac (VHT80)	Mode B	5	Rear	155	5775	0.600	95.4%	14.00	12.41	0.276	0.417	0.066	0.100	172
							Front	155	5775	0.099	95.4%	14.00	12.41					
			Airplay	802.11ac (VHT80)	Mode B	5	Edge 1	155	5775	0.136	95.4%	14.00	12.41					
							Edge 4	155	5775	0.563	95.4%	14.00	12.41	0.209	0.316	0.060	0.091	

10.37. BluetoothANT3 Power Mode A the P_{high} is same as P_{standalone}

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT3 P _{low}	Head	GFSK	Mode A	0	Left Touch	39	2441	100.0%	14.50	13.10	0.048	0.066	0.027	0.037	173
					Left Tilt	39	2441	100.0%	14.50	13.10	0.016	0.022	0.006	0.008	
					Right Touch	39	2441	100.0%	14.50	13.10	0.022	0.030	0.011	0.015	
					Right Tilt	39	2441	100.0%	14.50	13.10	0.031	0.043	0.012	0.017	
	Body & Hotspot	GFSK	Mode B	5	Rear	39	2441	100.0%	7.50	6.20	0.051	0.069	0.018	0.024	174
					Front	39	2441	100.0%	7.50	6.20	0.012	0.016	0.002	0.003	
ANT3 P _{high}	Hotspot	GFSK	Mode B	5	Edge 3	39	2441	100.0%	7.50	6.20	0.010	0.013	0.003	0.004	
					Edge 4	39	2441	100.0%	7.50	6.20	0.051	0.069	0.022	0.030	175
	Body & Hotspot	GFSK	Mode B	5	Rear	39	2441	100.0%	13.50	11.95	0.212	0.303	0.102	0.146	176
					Front	39	2441	100.0%	13.50	11.95	0.140	0.200	0.066	0.094	
ANT3 P _{standalone}	Hotspot	GFSK	Mode B	5	Edge 3	39	2441	100.0%	13.50	11.95	0.038	0.054	0.016	0.023	
					Edge 4	39	2441	100.0%	13.50	11.95	0.000	0.000	0.000	0.000	
	Body & Hotspot	GFSK	Mode B	5	Rear	39	2441	100.0%	18.25	16.45	0.407	0.616	0.198	0.300	178
					Front	39	2441	100.0%	18.25	16.45	0.386	0.584	0.180	0.272	
ANT4 P _{low}	Head	GFSK	Mode A	0	Left Touch	39	2441	100.0%	19.50	18.60	0.193	0.237	0.095	0.117	177
					Left Tilt	39	2441	100.0%	19.50	18.60	0.069	0.085	0.034	0.042	
					Right Touch	39	2441	100.0%	19.50	18.60	0.093	0.114	0.051	0.063	
					Right Tilt	39	2441	100.0%	19.50	18.60	0.115	0.141	0.056	0.068	
	Body & Hotspot	GFSK	Mode B	5	Edge 3	39	2441	100.0%	18.25	16.45	0.062	0.094	0.030	0.045	
					Edge 4	0	2402	100.0%	18.25	16.35	0.628	0.973	0.286	0.443	
ANT4 P _{high}	Hotspot	GFSK	Mode B	5	Edge 4	39	2441	100.0%	18.25	16.45	0.704	1.066	0.276	0.418	179
					Edge 4	78	2480	100.0%	18.25	16.25	0.632	1.002	0.271	0.430	
	Body & Hotspot	GFSK	Mode B	5	Rear	39	2441	100.0%	10.00	9.33	0.058	0.068	0.028	0.033	181
					Front	39	2441	100.0%	10.00	9.33	0.025	0.029	0.010	0.012	
ANT4 P _{standalone}	Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	10.00	9.33	0.010	0.012	0.003	0.004	
					Edge 2	39	2441	100.0%	10.00	9.33	0.079	0.092	0.035	0.041	182
	Body & Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	16.50	15.22	0.259	0.348	0.144	0.193	184
					Edge 2	39	2441	100.0%	16.50	15.22	0.256	0.344	0.111	0.149	
ANT4 P _{low}	Head	GFSK	Mode A	0	Left Touch	39	2441	100.0%	15.00	13.76	0.245	0.326	0.115	0.153	183
					Left Tilt	39	2441	100.0%	15.00	13.76	0.132	0.176	0.060	0.080	
					Right Touch	39	2441	100.0%	15.00	13.76	0.040	0.053	0.021	0.028	
					Right Tilt	39	2441	100.0%	15.00	13.76	0.034	0.045	0.013	0.017	
	Body & Hotspot	GFSK	Mode B	5	Rear	39	2441	100.0%	16.50	15.22	0.259	0.348	0.144	0.193	184
					Front	39	2441	100.0%	16.50	15.22	0.135	0.181	0.068	0.091	
ANT4 P _{high}	Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	16.50	15.22	0.053	0.071	0.017	0.023	
					Edge 2	39	2441	100.0%	16.50	15.22	0.256	0.344	0.111	0.149	
	Body & Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	19.50	18.23	0.595	0.797	0.325	0.435	186
					Front	39	2441	100.0%	19.50	18.23	0.264	0.354	0.135	0.181	
ANT4 P _{standalone}	Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	19.50	18.23	0.090	0.121	0.035	0.047	
					Edge 2	0	2402	100.0%	19.50	18.00	0.625	0.883	0.281	0.397	
					Edge 2	39	2441	100.0%	19.50	18.23	0.674	0.903	0.310	0.415	187
					Edge 2	78	2480	100.0%	19.50	18.01	0.577	0.813	0.256	0.361	
	Body & Hotspot	GFSK	Mode B	5	Edge 1	39	2441	100.0%	19.50	18.23	0.595	0.797	0.325	0.435	186
					Front	39	2441	100.0%	19.50	18.23	0.264	0.354	0.135	0.181	

10.38. MSS (Mobile Satellite Service)

Antenna	RF Exposure Conditions	Mode	Power Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	Meas.	Scaled	
ANT 1	Body & Hotspot	1-PRB SC-FDMA	Mode B	5	Rear	262391	1617.6	19.0	18.7	0.702	0.752	0.356	0.381	314
					Front	262391	1617.6	19.0	18.7	0.550	0.589	0.271	0.290	
	Hotspot	1-PRB SC-FDMA	Mode B	5	Edge 2	262391	1617.6	19.0	18.7	0.251	0.269	0.125	0.134	
					Edge 3	262316	1610.1	19.0	18.7	0.820	0.879	0.383	0.410	
					Edge 3	262391	1617.6	19.0	18.7	0.837	0.897	0.376	0.403	
					Edge 3	262466	1625.1	19.0	18.7	0.861	0.923	0.409	0.438	315
ANT 4	Body & Hotspot	1-PRB SC-FDMA	Mode B	5	Edge 3	262391	1617.6	19.0	18.7	0.017	0.018	0.006	0.007	
					Edge 4	262391	1617.6	19.0	18.7	0.017	0.018	0.006	0.007	
	Hotspot	1-PRB SC-FDMA	Mode B	5	Edge 1	262391	1617.6	21.2	19.8	0.513	0.708	0.283	0.391	316
					Edge 2	262316	1610.1	21.2	19.7	0.184	0.254	0.073	0.101	
					Edge 2	262391	1617.6	21.2	19.8	0.609	0.860	0.308	0.435	
					Edge 2	262391	1617.6	21.2	19.8	0.739	1.020	0.364	0.502	317
ANT 4	Hotspot	1-PRB SC-FDMA	Mode B	5	Edge 2	262466	1625.1	21.2	19.8	0.682	0.941	0.342	0.472	
					Edge 4	262391	1617.6	21.2	19.8	0.042	0.058	0.023	0.032	

Note(s):

Although hotspot mode is not supported for MSS, the MSS was assessed for the hotspot exposure condition to conservatively address both close to body and interactive (extremity) use conditions.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Head	Right Touch	No	0.803	N/A	N/A
	LTE Band 13	Hotspot	Edge 2	Yes	0.830	0.783	1.06
	LTE Band 71	Head	Left Touch	No	0.808	N/A	N/A
850	WCDMA Band V	Head	Right Touch	Yes	0.892	0.758	1.18
	LTE Band 5	Head	Right Touch	No	0.861	N/A	N/A
1700	WCDMA Band IV	Body & Hotspot	Rear	No	0.851	N/A	N/A
	LTE Band 66	Body & Hotspot	Rear	Yes	0.944	0.934	1.01
	FR1 n70	Hotspot	Edge 3	No	0.847	N/A	N/A
1900	GSM 1900	Body & Hotspot	Rear	No	0.864	N/A	N/A
	WCDMA Band II	Head	Right Touch	No	0.849	N/A	N/A
	LTE Band 25	Hotspot	Edge 2	Yes	0.904	0.829	1.09
2300	LTE Band 30	Body & Hotspot	Rear	Yes	0.912	0.872	1.05
2400	Wi-Fi 802.11b/g/n	Hotspot	Edge 2	No	0.804	N/A	N/A
	LTE Band 53	Head	Right Touch	Yes	0.868	0.772	1.12
2500	LTE Band 7	Hotspot	Edge 3	No	0.862	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	Yes	0.921	0.915	1.01
3600	LTE Band 48	Hotspot	Edge 2	No	0.879	N/A	N/A
	FR1 n77 (Block A)	Hotspot	Edge 2	Yes	0.928	0.787	1.18
	FR1 n77 (Block C)	Head	Right Touch	No	0.854	N/A	N/A
5200	Wi-Fi 802.11a/n/ac	Body & Hotspot	Rear	Yes	0.845	0.835	1.01
5300	Wi-Fi 802.11a/n/ac	Head	Right Tilt	Yes	0.876	0.826	1.06
5500	Wi-Fi 802.11a/n/ac	Body & Hotspot	Rear	Yes	0.900	0.861	1.05
5800	Wi-Fi 802.11a/n/ac	Body & Hotspot	Rear	Yes	0.814	0.766	1.06

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

12. Simultaneous Transmission Conditions

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest reported SAR for the frequency bands should be used to determine **SAR₁** or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

Simultaneous transmission SAR measurement

When simultaneous transmission SAR measurements are required in different frequency bands not covered by a single probe calibration point then separate tests for each frequency band are performed. The tests are performed using enlarged zoom scans which are processed, by means of superposition, using the DASY volume scan post-processing procedures to determine the 1-g SAR for the aggregate SAR distribution.

The spatial resolution used for all enlarged zoom scans is the same as used for the most stringent zoom scans. I.E. the scan parameters required for the highest frequency assessed are used for all enlarged zoom scans. The scans cover the complete area of the device to ensure all transmitting antennas and radiating structures are assessed.

DASY provides the ability to perform Multiband Evaluations according to the latest standards using the Volume Scan job as well as appropriate routines for the Post-processing.

In order to extract and process measurements within different frequency bands, the SEMCAD X Post-processor performs the combination and subsequent superposition of these measurement data via DASY = Combined MultiBand Averaged SAR.

Combined Multi Band Averaged SAR allows - in addition to the data extraction - an evaluation of the 1 g, 10 g and/or arbitrary averaged mass SAR.

Power Scaling Factor is used to allow the volume scans to be scaled by a value other than "1", this is important when the results need to be scaled to different maximum power levels. The Power Scaling Factor is applied to each individual point of the scan. When power scaling is used in multi-band combinations the scaling factor is applied to each individual point of the first scan, the second factor is then applied to each individual point of the second scan and so on. The scans are then combined.

Simultaneous transmission SAR Exclusion

According to KDB 248227 D01, simultaneous SAR provisions in KDB 447498 D01 apply to determine simultaneous transmission SAR test exclusion for Wi-Fi MIMO. If the sum of 1-g single transmission chain SAR measurements is <1.6W/kg and/or the MIMO output power is equal or less than a single chain, then no additional SAR measurements for simultaneously at the specified maximum output power of MIMO operation.

When antennas are spatially separated to the extent that SAR distributions do not overlap and can be treated independently, SAR compliance for simultaneous transmission is determined separately for each individual antenna.

In Airplay mode, the device uses same power and power control mechanism as Wi-Fi. Airplay is not supported in hotspot mode. Airplay utilize the same 802.11 modes, modulation, MIMO, Channel Bandwidth, etc. as Wi-Fi does. Therefore Airplay usage is categorized by the Wi-Fi SAR testing contained in Section 10.

The simultaneous transmission possibilities for this device are listed as below.

RF Exposure Condition	Item	Capable Transmit Configurations	
Head Body Worn Accessory Hotspot	1	WWAN & 5G OFF (CELLULAR ANTENNAS OFF)	+ (ANT5) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{High})
	2		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{High})
	3		+ Wi-Fi 5 GHz MIMO + (ANT3) Bluetooth (P _{High})
	4		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{High})
	5		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{High})
	6		+ Wi-Fi 5 GHz MIMO + (ANT4) Bluetooth (P _{High})
	7	WWAN & 5G ON (CELLULAR ANTENNAS ON)	+ (ANT3) Wi-Fi 2.4 GHz SISO
	8		+ (ANT4) Wi-Fi 2.4 GHz SISO
	9		+ Wi-Fi 2.4 GHz MIMO
	10		+ (ANT3) Bluetooth (P _{High})
	11		+ (ANT4) Bluetooth (P _{High})
	12		+ (ANT5) Wi-Fi 5 GHz SISO
	13		+ (ANT6) Wi-Fi 5 GHz SISO
	14		+ Wi-Fi 5 GHz MIMO
	15		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{Low})
	16		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT3) Bluetooth (P _{Low})
	17		+ Wi-Fi 5 GHz MIMO + (ANT3) Bluetooth (P _{Low})
	18		+ (ANT5) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{Low})
	19		+ (ANT6) Wi-Fi 5 GHz SISO + (ANT4) Bluetooth (P _{Low})
	20		+ Wi-Fi 5 GHz MIMO + (ANT4) Bluetooth (P _{Low})

Note(s):

- Wi-Fi 2.4GHz & Bluetooth cannot transmit simultaneously.
- Wi-Fi 2.4GHz & Wi-Fi 5GHz cannot transmit simultaneously.
- WWAN cannot transmit simultaneously.
- Bluetooth P_{Low} is used with Wi-Fi and WWAN antennas are active.
- Bluetooth P_{High} is used when Wi-Fi antenna is active and WWAN antenna is inactive or with Wi-Fi inactive and WWAN antenna is active.
- Bluetooth P_{standalone} is used with Wi-Fi and WWAN antennas are inactive.
- Wi-Fi SISO mode SAR result can also represent for MIMO mode SAR and is used for MIMO mode simultaneous transmission analysis because antennas are not overlapping and the MIMO mode maximum power is equal or less than SISO mode.
- 5G NR only supported NSA mode.
- For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G NR operation is demonstrated in the Part 2 Report during algorithm validation. In Part 1 Report, simultaneous transmission compliance was evaluated individually with other Radios (WLAN or BT) using one of 4G or 5G NR.

12.1. Sum of the SAR for WWAN Cell-off & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)			
		1	2	3	4	1+3	1+4	2+3	2+4
		Wi-Fi 5G $P_{\text{cell OFF}}$ ANT5	Wi-Fi 5G $P_{\text{cell OFF}}$ ANT6	BT(P_{high}) ANT3	BT(P_{high}) ANT4				
Head	Left Touch	0.083	1.138	0.237	0.326	0.321	0.409	1.376	1.464
	Left Tilt	0.083	1.138	0.085	0.176	0.168	0.259	1.223	1.314
	Right Touch	0.178	1.149	0.114	0.053	0.293	0.231	1.264	1.202
	Right Tilt	0.083	1.138	0.141	0.045	0.225	0.128	1.280	1.183
Body-worn & Hotspot	Rear	1.142	1.147	0.303	0.348	1.445	1.489	1.450	1.495
	Front	1.142	1.147	0.200	0.181	1.342	1.323	1.347	1.328
Hotspot	Edge 1		1.068		0.071		0.071	1.068	1.139
	Edge 2				0.344		0.344		0.344
	Edge 3	0.364		0.054		0.418	0.364	0.054	
	Edge 4	0.364	1.068	0.000		0.364	0.364	1.068	1.068

12.2. Sum of the SAR for WWAN(TNE) Cell-on ANT1 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (TNE) ANT1	Wi-Fi 2.4G $P_{\text{cell ON}}$ ANT3	Wi-Fi 2.4G $P_{\text{cell ON}}$ ANT4	BT(P_{high}) ANT3	BT(P_{high}) ANT4				
Head	Left Touch	0.057	0.240	0.406	0.237	0.326	0.297	0.463	0.294	0.383
	Left Tilt	0.037	0.240	0.223	0.085	0.176	0.277	0.260	0.122	0.213
	Right Touch	0.122	0.240	0.223	0.114	0.053	0.362	0.345	0.236	0.175
	Right Tilt	0.020	0.240	0.223	0.141	0.045	0.260	0.243	0.161	0.065
Body-worn & Hptspot	Rear	0.752	0.473	0.362	0.303	0.348	1.225	1.114	1.055	1.100
	Front	0.589	0.473	0.362	0.200	0.181	1.062	0.951	0.789	0.771
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2	0.523		0.546		0.344	0.523	1.069	0.523	0.867
	Edge 3	0.923	0.335		0.054		1.257	0.923	0.977	0.923
	Edge 4	0.068	0.335		0.000		0.403	0.068	0.068	0.068
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (TNE) ANT1	Wi-Fi 5G $P_{\text{cell ON}}$ ANT5	Wi-Fi 5G $P_{\text{cell ON}}$ ANT6	BT(P_{Low}) ANT3	BT(P_{Low}) ANT4				
Head	Left Touch	0.057	0.041	0.354	0.066	0.076	0.164	0.174	0.477	0.487
	Left Tilt	0.037	0.041	0.354	0.022	0.033	0.100	0.111	0.413	0.424
	Right Touch	0.122	0.180	0.354	0.030	0.014	0.332	0.316	0.506	0.490
	Right Tilt	0.020	0.041	0.354	0.043	0.006	0.104	0.067	0.417	0.380
Body-worn & Hptspot	Rear	0.752	0.465	0.454	0.069	0.068	1.286	1.285	1.275	1.273
	Front	0.589	0.465	0.112	0.016	0.029	1.071	1.084	0.717	0.730
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2	0.523				0.092	0.523	0.615	0.523	0.615
	Edge 3	0.923	0.162		0.013		1.098	1.085	0.936	0.923
	Edge 4	0.068	0.169	0.350	0.069		0.306	0.237	0.487	0.418

12.3. Sum of the SAR for WWAN(TNE) Cell-on ANT2 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (TNE) ANT2	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.581	0.240	0.406	0.237	0.326	0.821	0.987	0.819	0.907
	Left Tilt	0.618	0.240	0.223	0.085	0.176	0.858	0.841	0.703	0.794
	Right Touch	0.894	0.240	0.223	0.114	0.053	1.134	1.117	1.009	0.947
	Right Tilt	0.678	0.240	0.223	0.141	0.045	0.918	0.901	0.819	0.723
Body-worn & Htpspot	Rear	0.674	0.473	0.362	0.303	0.348	1.147	1.036	0.977	1.022
	Front	0.399	0.473	0.362	0.200	0.181	0.872	0.761	0.599	0.580
Hotspot	Edge 1	0.478		0.362		0.071	0.478	0.840	0.478	0.549
	Edge 2	0.032		0.546		0.344	0.032	0.578	0.032	0.376
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4	0.856	0.335		0.000		1.191	0.856	0.856	0.856
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (TNE) ANT2	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.581	0.041	0.354	0.066	0.076	0.688	0.699	1.001	1.012
	Left Tilt	0.618	0.041	0.354	0.022	0.033	0.681	0.692	0.994	1.005
	Right Touch	0.894	0.180	0.354	0.030	0.014	1.104	1.088	1.279	1.263
	Right Tilt	0.678	0.041	0.354	0.043	0.006	0.762	0.725	1.075	1.038
Body-worn & Htpspot	Rear	0.674	0.465	0.454	0.069	0.068	1.208	1.206	1.196	1.195
	Front	0.399	0.465	0.112	0.016	0.029	0.880	0.893	0.527	0.540
Hotspot	Edge 1	0.478		0.112		0.012	0.478	0.490	0.590	0.601
	Edge 2	0.032				0.092	0.032	0.124	0.032	0.124
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4	0.856	0.169	0.350	0.069		1.094	1.025	1.274	1.206

12.4. Sum of the SAR for WWAN(TNE) Cell-on ANT4 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (TNE) ANT4	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Body-worn & Htpspot	Rear	0.708	0.473	0.362	0.303	0.348	1.181	1.070	1.011	1.056
	Front	0.491	0.473	0.362	0.200	0.181	0.964	0.853	0.691	0.673
Hotspot	Edge 1	0.254		0.362		0.071	0.254	0.616	0.254	0.325
	Edge 2	1.020		0.546		0.344	1.020	1.566	1.020	1.364
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4		0.335		0.000		0.335			
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (TNE) ANT4	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Body-worn & Htpspot	Rear	0.708	0.465	0.454	0.069	0.068	1.242	1.241	1.230	1.229
	Front	0.491	0.465	0.112	0.016	0.029	0.973	0.986	0.619	0.632
Hotspot	Edge 1	0.254		0.112		0.012	0.254	0.266	0.366	0.377
	Edge 2	1.020				0.092	1.020	1.112	1.020	1.112
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4		0.169	0.350	0.069		0.238	0.169	0.419	0.350

12.5. Sum of the SAR for WWAN(PCE) Cell-on ANT1 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT1	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.293	0.240	0.406	0.237	0.326	0.533	0.699	0.530	0.619
	Left Tilt	0.193	0.240	0.223	0.085	0.176	0.433	0.416	0.278	0.369
	Right Touch	0.530	0.240	0.223	0.114	0.053	0.770	0.753	0.644	0.583
	Right Tilt	0.181	0.240	0.223	0.141	0.045	0.421	0.404	0.322	0.226
Body-worn & Hptspot	Rear	0.773	0.473	0.362	0.303	0.348	1.246	1.135	1.076	1.121
	Front	0.572	0.473	0.362	0.200	0.181	1.045	0.934	0.772	0.753
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2	0.865		0.546		0.344	0.865	1.411	0.865	1.209
	Edge 3	0.929	0.335		0.054		1.264	0.929	0.983	0.929
	Edge 4	0.445	0.335		0.000		0.780	0.445	0.445	0.445
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT1	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.293	0.041	0.354	0.066	0.076	0.400	0.410	0.713	0.723
	Left Tilt	0.193	0.041	0.354	0.022	0.033	0.256	0.267	0.569	0.580
	Right Touch	0.530	0.180	0.354	0.030	0.014	0.740	0.724	0.914	0.898
	Right Tilt	0.181	0.041	0.354	0.043	0.006	0.265	0.228	0.578	0.541
Body-worn & Hptspot	Rear	0.773	0.465	0.454	0.069	0.068	1.307	1.306	1.295	1.294
	Front	0.572	0.465	0.112	0.016	0.029	1.053	1.066	0.700	0.713
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2	0.865				0.092	0.865	0.957	0.865	0.957
	Edge 3	0.929	0.162		0.013		1.105	1.091	0.942	0.929
	Edge 4	0.445	0.169	0.350	0.069		0.683	0.614	0.864	0.795

12.6. Sum of the SAR for WWAN(PCE) Cell-on ANT2 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT2	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.876	0.240	0.406	0.237	0.326	1.115	1.281	1.113	1.202
	Left Tilt	0.862	0.240	0.223	0.085	0.176	1.101	1.085	0.946	1.037
	Right Touch	0.947	0.240	0.223	0.114	0.053	1.187	1.170	1.062	1.000
	Right Tilt	0.940	0.240	0.223	0.141	0.045	1.179	1.163	1.081	0.985
Body-worn & Hptspot	Rear	0.948	0.473	0.362	0.303	0.348	1.421	1.310	1.251	1.296
	Front	0.786	0.473	0.362	0.200	0.181	1.259	1.148	0.986	0.968
Hotspot	Edge 1	0.818		0.362		0.071	0.818	1.179	0.818	0.889
	Edge 2	0.366		0.546		0.344	0.366	0.911	0.366	0.709
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4	0.929	0.335		0.000		1.264	0.929	0.929	0.929

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT2	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.876	0.041	0.354	0.066	0.076	0.983	0.993	1.296	1.306
	Left Tilt	0.862	0.041	0.354	0.022	0.033	0.925	0.935	1.238	1.249
	Right Touch	0.947	0.180	0.354	0.030	0.014	1.157	1.141	1.332	1.315
	Right Tilt	0.940	0.041	0.354	0.043	0.006	1.023	0.987	1.337	1.300
Body-worn & Hptspot	Rear	0.948	0.465	0.454	0.069	0.068	1.482	1.481	1.471	1.470
	Front	0.786	0.465	0.112	0.016	0.029	1.268	1.281	0.914	0.927
Hotspot	Edge 1	0.818		0.112		0.012	0.818	0.829	0.929	0.941
	Edge 2	0.366				0.092	0.366	0.458	0.366	0.458
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4	0.929	0.169	0.350	0.069		1.167	1.098	1.348	1.279

12.7. Sum of the SAR for WWAN(PCE) Cell-on ANT3 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT3	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.757	0.240	0.406	0.237	0.326	0.997	1.163	0.994	1.083
	Left Tilt	0.307	0.240	0.223	0.085	0.176	0.547	0.530	0.392	0.483
	Right Touch	0.340	0.240	0.223	0.114	0.053	0.580	0.563	0.454	0.393
	Right Tilt	0.418	0.240	0.223	0.141	0.045	0.658	0.641	0.559	0.463
Body-worn & Hptspot	Rear	0.864	0.473	0.362	0.303	0.348	1.337	1.226	1.167	1.212
	Front	0.696	0.473	0.362	0.200	0.181	1.169	1.058	0.896	0.877
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2			0.546		0.344		0.546		0.344
	Edge 3	0.371	0.335		0.054		0.706	0.371	0.425	0.371
	Edge 4	0.852	0.335		0.000		1.187	0.852	0.852	0.852
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT3	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.757	0.041	0.354	0.066	0.076	0.864	0.874	1.177	1.187
	Left Tilt	0.307	0.041	0.354	0.022	0.033	0.370	0.381	0.683	0.694
	Right Touch	0.340	0.180	0.354	0.030	0.014	0.550	0.534	0.724	0.708
	Right Tilt	0.418	0.041	0.354	0.043	0.006	0.502	0.465	0.815	0.778
Body-worn & Hptspot	Rear	0.864	0.465	0.454	0.069	0.068	1.398	1.397	1.386	1.385
	Front	0.696	0.465	0.112	0.016	0.029	1.177	1.190	0.824	0.837
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2					0.092		0.092		0.092
	Edge 3	0.371	0.162		0.013		0.547	0.533	0.384	0.371
	Edge 4	0.852	0.169	0.350	0.069		1.090	1.021	1.271	1.202

12.8. Sum of the SAR for WWAN(PCE) Cell-on ANT4 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT4	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.935	0.240	0.406	0.237	0.326	1.175	1.341	1.173	1.261
	Left Tilt	0.603	0.240	0.223	0.085	0.176	0.843	0.826	0.688	0.779
	Right Touch	0.388	0.240	0.223	0.114	0.053	0.628	0.612	0.503	0.441
	Right Tilt	0.261	0.240	0.223	0.141	0.045	0.501	0.484	0.402	0.306
Body-worn & Hptspot	Rear	0.929	0.473	0.362	0.303	0.348	1.402	1.291	1.232	1.276
	Front	0.498	0.473	0.362	0.200	0.181	0.971	0.860	0.698	0.680
Hotspot	Edge 1	0.435		0.362		0.071	0.435	0.796	0.435	0.506
	Edge 2	0.947		0.546		0.344	0.947	1.492	0.947	1.290
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4		0.335		0.000		0.335			
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT4	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.935	0.041	0.354	0.066	0.076	1.042	1.053	1.355	1.366
	Left Tilt	0.603	0.041	0.354	0.022	0.033	0.666	0.677	0.979	0.990
	Right Touch	0.388	0.180	0.354	0.030	0.014	0.599	0.582	0.773	0.757
	Right Tilt	0.261	0.041	0.354	0.043	0.006	0.345	0.308	0.658	0.621
Body-worn & Hptspot	Rear	0.929	0.465	0.454	0.069	0.068	1.463	1.461	1.451	1.450
	Front	0.498	0.465	0.112	0.016	0.029	0.980	0.993	0.626	0.639
Hotspot	Edge 1	0.435		0.112		0.012	0.435	0.446	0.546	0.558
	Edge 2	0.947				0.092	0.947	1.039	0.947	1.039
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4		0.169	0.350	0.069		0.238	0.169	0.419	0.350

12.9. Sum of the SAR for WWAN(PCE) Cell-on ANT7 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT7	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.266	0.240	0.406	0.237	0.326	0.505	0.671	0.503	0.592
	Left Tilt	0.153	0.240	0.223	0.085	0.176	0.392	0.376	0.238	0.329
	Right Touch	0.534	0.240	0.223	0.114	0.053	0.773	0.757	0.648	0.587
	Right Tilt	0.095	0.240	0.223	0.141	0.045	0.334	0.318	0.236	0.140
Body-worn & Hptspot	Rear	0.573	0.473	0.362	0.303	0.348	1.045	0.934	0.875	0.920
	Front	0.410	0.473	0.362	0.200	0.181	0.883	0.772	0.610	0.591
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2	0.939		0.546		0.344	0.939	1.484	0.939	1.282
	Edge 3	0.471	0.335		0.054		0.806	0.471	0.526	0.471
	Edge 4		0.335		0.000		0.335			
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT7	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.266	0.041	0.354	0.066	0.076	0.372	0.383	0.686	0.696
	Left Tilt	0.153	0.041	0.354	0.022	0.033	0.216	0.227	0.529	0.540
	Right Touch	0.534	0.180	0.354	0.030	0.014	0.744	0.727	0.918	0.902
	Right Tilt	0.095	0.041	0.354	0.043	0.006	0.178	0.142	0.491	0.455
Body-worn & Hptspot	Rear	0.573	0.465	0.454	0.069	0.068	1.106	1.105	1.095	1.094
	Front	0.410	0.465	0.112	0.016	0.029	0.891	0.904	0.538	0.551
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2	0.939				0.092	0.939	1.031	0.939	1.031
	Edge 3	0.471	0.162		0.013		0.647	0.634	0.485	0.471
	Edge 4		0.169	0.350	0.069		0.238	0.169	0.419	0.350

12.10. Sum of the SAR for WWAN(PCE) Cell-on ANT8 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT8	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.386	0.240	0.406	0.237	0.326	0.626	0.792	0.623	0.712
	Left Tilt	0.390	0.240	0.223	0.085	0.176	0.630	0.613	0.475	0.566
	Right Touch	0.936	0.240	0.223	0.114	0.053	1.176	1.159	1.051	0.989
	Right Tilt	0.512	0.240	0.223	0.141	0.045	0.752	0.735	0.654	0.557
Body-worn & Hptspot	Rear	0.478	0.473	0.362	0.303	0.348	0.951	0.840	0.781	0.826
	Front	0.260	0.473	0.362	0.200	0.181	0.733	0.622	0.460	0.441
Hotspot	Edge 1	0.261		0.362		0.071	0.261	0.623	0.261	0.332
	Edge 2			0.546		0.344		0.546		0.344
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4	0.849	0.335		0.000		1.184	0.849	0.849	0.849
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT8	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.386	0.041	0.354	0.066	0.076	0.493	0.503	0.806	0.816
	Left Tilt	0.390	0.041	0.354	0.022	0.033	0.453	0.464	0.767	0.777
	Right Touch	0.936	0.180	0.354	0.030	0.014	1.146	1.130	1.321	1.305
	Right Tilt	0.512	0.041	0.354	0.043	0.006	0.596	0.559	0.909	0.872
Body-worn & Hptspot	Rear	0.478	0.465	0.454	0.069	0.068	1.012	1.011	1.000	0.999
	Front	0.260	0.465	0.112	0.016	0.029	0.741	0.754	0.387	0.400
Hotspot	Edge 1	0.261		0.112		0.012	0.261	0.273	0.372	0.384
	Edge 2					0.092		0.092		0.092
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4	0.849	0.169	0.350	0.069		1.087	1.018	1.267	1.199

12.11. Sum of the SAR for WWAN(PCE) Cell-on ANT9 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (PCE) ANT9	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.224	0.240	0.406	0.237	0.326	0.464	0.630	0.461	0.550
	Left Tilt	0.066	0.240	0.223	0.085	0.176	0.306	0.289	0.151	0.242
	Right Touch	0.249	0.240	0.223	0.114	0.053	0.489	0.472	0.363	0.302
	Right Tilt	0.124	0.240	0.223	0.141	0.045	0.364	0.347	0.265	0.169
Body-worn & Hptspot	Rear	0.376	0.473	0.362	0.303	0.348	0.849	0.738	0.679	0.724
	Front	0.650	0.473	0.362	0.200	0.181	1.123	1.012	0.850	0.831
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2			0.546		0.344		0.546		0.344
	Edge 3	0.231	0.335		0.054		0.566	0.231	0.285	0.231
	Edge 4	0.794	0.335		0.000		1.129	0.794	0.794	0.794
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (PCE) ANT9	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.224	0.041	0.354	0.066	0.076	0.331	0.341	0.644	0.654
	Left Tilt	0.066	0.041	0.354	0.022	0.033	0.129	0.140	0.443	0.453
	Right Touch	0.249	0.180	0.354	0.030	0.014	0.459	0.443	0.633	0.617
	Right Tilt	0.124	0.041	0.354	0.043	0.006	0.208	0.171	0.521	0.484
Body-worn & Hptspot	Rear	0.376	0.465	0.454	0.069	0.068	0.910	0.909	0.898	0.897
	Front	0.650	0.465	0.112	0.016	0.029	1.131	1.144	0.778	0.791
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2					0.092		0.092		0.092
	Edge 3	0.231	0.162		0.013		0.407	0.393	0.244	0.231
	Edge 4	0.794	0.169	0.350	0.069		1.032	0.963	1.213	1.144

12.12. Sum of the SAR for WWAN(CBE) Cell-on ANT4 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT4	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.677	0.240	0.406	0.237	0.326	0.916	0.645	0.643	0.563
	Left Tilt	0.313	0.240	0.223	0.085	0.176	0.552	0.463	0.308	0.261
	Right Touch	0.196	0.240	0.223	0.114	0.053	0.436	0.463	0.338	0.167
	Right Tilt	0.130	0.240	0.223	0.141	0.045	0.370	0.463	0.365	0.187
Body-worn & Hptspot	Rear	0.749	0.473	0.362	0.303	0.348	1.222	0.835	0.665	0.651
	Front	0.325	0.473	0.362	0.200	0.181	0.798	0.835	0.562	0.381
Hotspot	Edge 1	0.109		0.362		0.071	0.109	0.362	0.362	0.071
	Edge 2	0.945		0.546		0.344	0.945	0.546	0.546	0.344
	Edge 3		0.335		0.054		0.335	0.335	0.054	0.054
	Edge 4		0.335		0.000		0.335	0.335		
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT4	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.677	0.041	0.354	0.066	0.076	0.783	0.794	1.097	1.107
	Left Tilt	0.313	0.041	0.354	0.022	0.033	0.376	0.386	0.689	0.700
	Right Touch	0.196	0.180	0.354	0.030	0.014	0.406	0.390	0.581	0.564
	Right Tilt	0.130	0.041	0.354	0.043	0.006	0.214	0.177	0.527	0.491
Body-worn & Hptspot	Rear	0.749	0.465	0.454	0.069	0.068	1.283	1.282	1.271	1.270
	Front	0.325	0.465	0.112	0.016	0.029	0.806	0.819	0.452	0.465
Hotspot	Edge 1	0.109		0.112		0.012	0.109	0.121	0.221	0.233
	Edge 2	0.945				0.092	0.945	1.037	0.945	1.037
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4		0.169	0.350	0.069		0.238	0.169	0.419	0.350

12.13. Sum of the SAR for WWAN(CBE) Cell-on ANT7 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT7	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.089	0.240	0.406	0.237	0.326	0.328	0.494	0.326	0.415
	Left Tilt	0.076	0.240	0.223	0.085	0.176	0.315	0.299	0.161	0.251
	Right Touch	0.237	0.240	0.223	0.114	0.053	0.477	0.460	0.352	0.290
	Right Tilt	0.077	0.240	0.223	0.141	0.045	0.316	0.300	0.218	0.122
Body-worn & Hptspot	Rear	0.631	0.473	0.362	0.303	0.348	1.104	0.993	0.934	0.979
	Front	0.414	0.473	0.362	0.200	0.181	0.886	0.776	0.614	0.595
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2	0.925		0.546		0.344	0.925	1.470	0.925	1.268
	Edge 3	0.525	0.335		0.054		0.860	0.525	0.579	0.525
	Edge 4		0.335		0.000		0.335			
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT7	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.089	0.041	0.354	0.066	0.076	0.195	0.206	0.508	0.519
	Left Tilt	0.076	0.041	0.354	0.022	0.033	0.139	0.150	0.452	0.463
	Right Touch	0.237	0.180	0.354	0.030	0.014	0.447	0.431	0.622	0.606
	Right Tilt	0.077	0.041	0.354	0.043	0.006	0.161	0.124	0.474	0.437
Body-worn & Hptspot	Rear	0.631	0.465	0.454	0.069	0.068	1.165	1.163	1.153	1.152
	Front	0.414	0.465	0.112	0.016	0.029	0.895	0.908	0.541	0.554
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2	0.925				0.092	0.925	1.017	0.925	1.017
	Edge 3	0.525	0.162		0.013		0.701	0.687	0.538	0.525
	Edge 4		0.169	0.350	0.069		0.238	0.169	0.419	0.350

12.14. Sum of the SAR for WWAN(CBE) Cell-on ANT8 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT8	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.356	0.240	0.406	0.237	0.326	0.596	0.762	0.593	0.682
	Left Tilt	0.449	0.240	0.223	0.085	0.176	0.688	0.672	0.534	0.624
	Right Touch	0.943	0.240	0.223	0.114	0.053	1.182	1.166	1.057	0.996
	Right Tilt	0.436	0.240	0.223	0.141	0.045	0.675	0.659	0.577	0.481
Body-worn & Hptspot	Rear	0.891	0.473	0.362	0.303	0.348	1.364	1.253	1.194	1.239
	Front	0.195	0.473	0.362	0.200	0.181	0.668	0.557	0.395	0.376
Hotspot	Edge 1	0.257		0.362		0.071	0.257	0.619	0.257	0.328
	Edge 2			0.546		0.344		0.546		0.344
	Edge 3		0.335		0.054		0.335		0.054	
	Edge 4	0.525	0.335		0.000		0.860	0.525	0.525	0.525
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT8	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.356	0.041	0.354	0.066	0.076	0.463	0.473	0.776	0.786
	Left Tilt	0.449	0.041	0.354	0.022	0.033	0.512	0.522	0.825	0.836
	Right Touch	0.943	0.180	0.354	0.030	0.014	1.153	1.137	1.327	1.311
	Right Tilt	0.436	0.041	0.354	0.043	0.006	0.520	0.483	0.833	0.796
Body-worn & Hptspot	Rear	0.891	0.465	0.454	0.069	0.068	1.425	1.424	1.413	1.412
	Front	0.195	0.465	0.112	0.016	0.029	0.676	0.689	0.323	0.336
Hotspot	Edge 1	0.257		0.112		0.012	0.257	0.268	0.368	0.380
	Edge 2					0.092		0.092		0.092
	Edge 3		0.162		0.013		0.176	0.162	0.013	
	Edge 4	0.525	0.169	0.350	0.069		0.763	0.695	0.944	0.875

12.15. Sum of the SAR for WWAN(CBE) Cell-on ANT9 & Wi-Fi & BT results

RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	2	3	6	7	1+2	1+3	1+6	1+7
		WWAN (CBE) ANT9	Wi-Fi 2.4G P _{cell ON} ANT3	Wi-Fi 2.4G P _{cell ON} ANT4	BT(P _{high}) ANT3	BT(P _{high}) ANT4				
Head	Left Touch	0.181	0.240	0.406	0.237	0.326	0.420	0.586	0.418	0.507
	Left Tilt	0.034	0.240	0.223	0.085	0.176	0.273	0.257	0.119	0.209
	Right Touch	0.129	0.240	0.223	0.114	0.053	0.369	0.352	0.244	0.182
	Right Tilt	0.076	0.240	0.223	0.141	0.045	0.316	0.299	0.217	0.121
Body-worn & Hptspot	Rear	0.506	0.473	0.362	0.303	0.348	0.979	0.868	0.809	0.854
	Front	0.645	0.473	0.362	0.200	0.181	1.118	1.007	0.845	0.826
Hotspot	Edge 1			0.362		0.071		0.362		0.071
	Edge 2			0.546		0.344		0.546		0.344
	Edge 3	0.307	0.335		0.054		0.641	0.307	0.361	0.307
	Edge 4	0.945	0.335		0.000		1.280	0.945	0.945	0.945
RF Exposure conditions	Test Position	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)			
		1	4	5	8	9	1+4+8	1+4+9	1+5+8	1+5+9
		WWAN (CBE) ANT9	Wi-Fi 5G P _{cell ON} ANT5	Wi-Fi 5G P _{cell ON} ANT6	BT(P _{Low}) ANT3	BT(P _{Low}) ANT4				
Head	Left Touch	0.181	0.041	0.354	0.066	0.076	0.287	0.298	0.600	0.611
	Left Tilt	0.034	0.041	0.354	0.022	0.033	0.097	0.108	0.410	0.421
	Right Touch	0.129	0.180	0.354	0.030	0.014	0.339	0.323	0.514	0.497
	Right Tilt	0.076	0.041	0.354	0.043	0.006	0.160	0.123	0.473	0.436
Body-worn & Hptspot	Rear	0.506	0.465	0.454	0.069	0.068	1.040	1.039	1.029	1.028
	Front	0.645	0.465	0.112	0.016	0.029	1.126	1.139	0.773	0.786
Hotspot	Edge 1			0.112		0.012		0.012	0.112	0.123
	Edge 2					0.092		0.092		0.092
	Edge 3	0.307	0.162		0.013		0.482	0.469	0.320	0.307
	Edge 4	0.945	0.169	0.350	0.069		1.183	1.114	1.364	1.295

Note(s):

As the sum of the SAR for any simultaneous transmission condition never exceeded 1.6 W/kg no further evaluation was required.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

Appendix G: LTE Down-Link Carrier Aggregation

Appendix H: Body Detect Validation

Appendix I: Wi-Fi Time-Averaged SAR(TAS)

Appendix J: MSS Time Averaged SAR

END OF REPORT