



Test Mode:	802.11ax HE160	Frequency(MHz):	6505
Polarity:	Horizontal	Test Voltage:	DC 5V

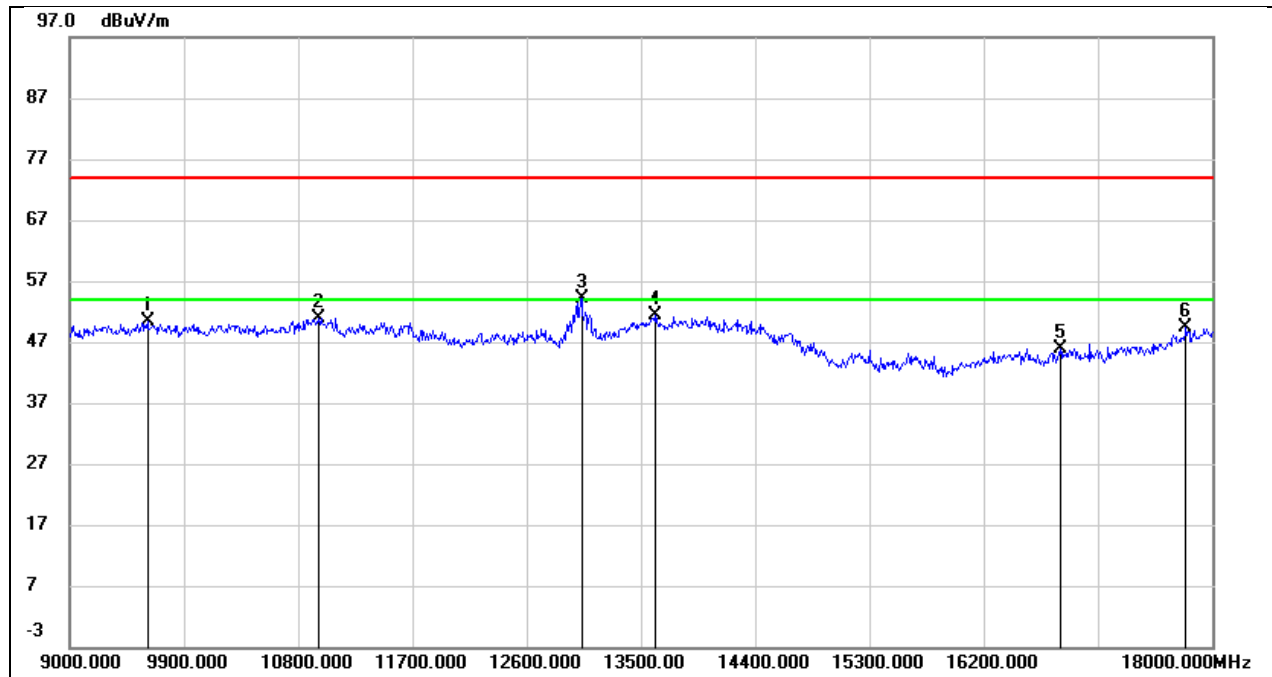


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9612.000	37.07	13.41	50.48	74.00	-23.52	peak
2	10962.000	35.56	15.36	50.92	74.00	-23.08	peak
3*	13032.000	34.19	20.02	54.21	68.20	-13.99	peak
4	13617.000	28.87	22.44	51.31	74.00	-22.69	peak
5	16803.000	23.36	22.60	45.96	74.00	-28.04	peak
6	17793.000	22.06	27.24	49.30	74.00	-24.70	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6505
Polarity:	Vertical	Test Voltage:	DC 5V

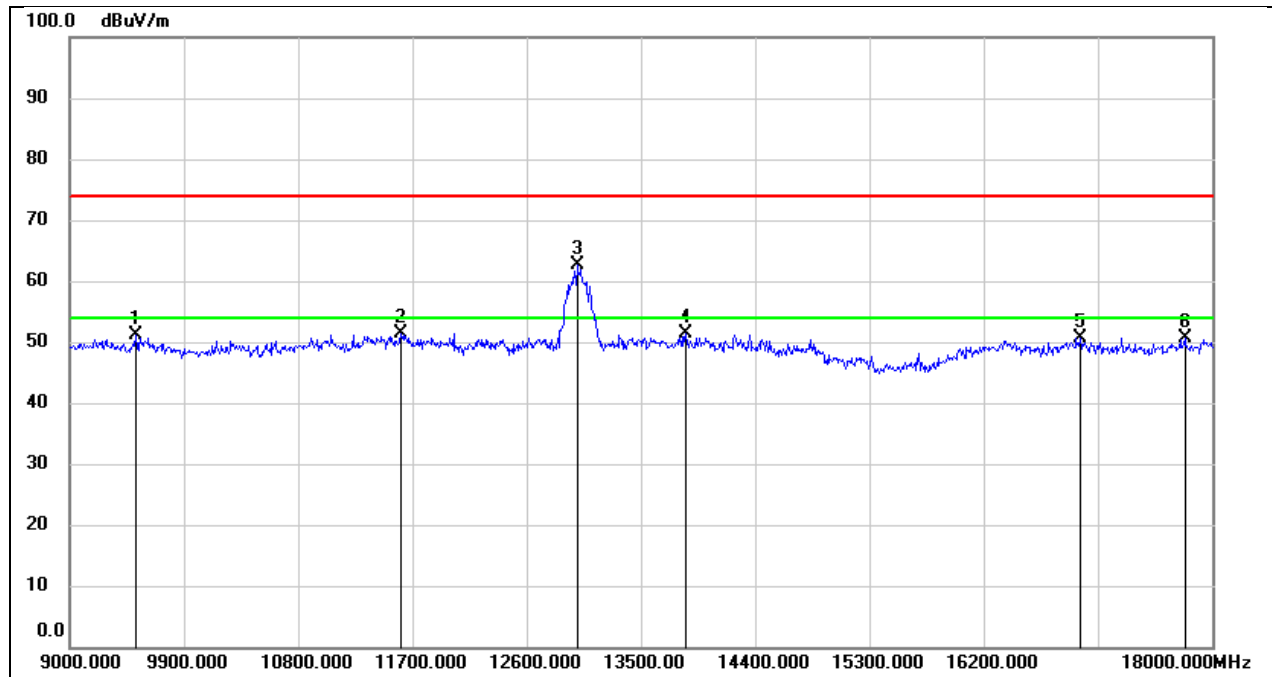


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9522.000	38.31	12.91	51.22	74.00	-22.78	peak
2	11610.000	34.23	17.13	51.36	74.00	-22.64	peak
3*	12996.000	43.90	18.66	62.56	68.20	-5.64	peak
4	13851.000	30.03	21.24	51.27	74.00	-22.73	peak
5	16965.000	25.92	24.70	50.62	74.00	-23.38	peak
6	17784.000	24.63	25.91	50.54	74.00	-23.46	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6665
Polarity:	Horizontal	Test Voltage:	DC 5V

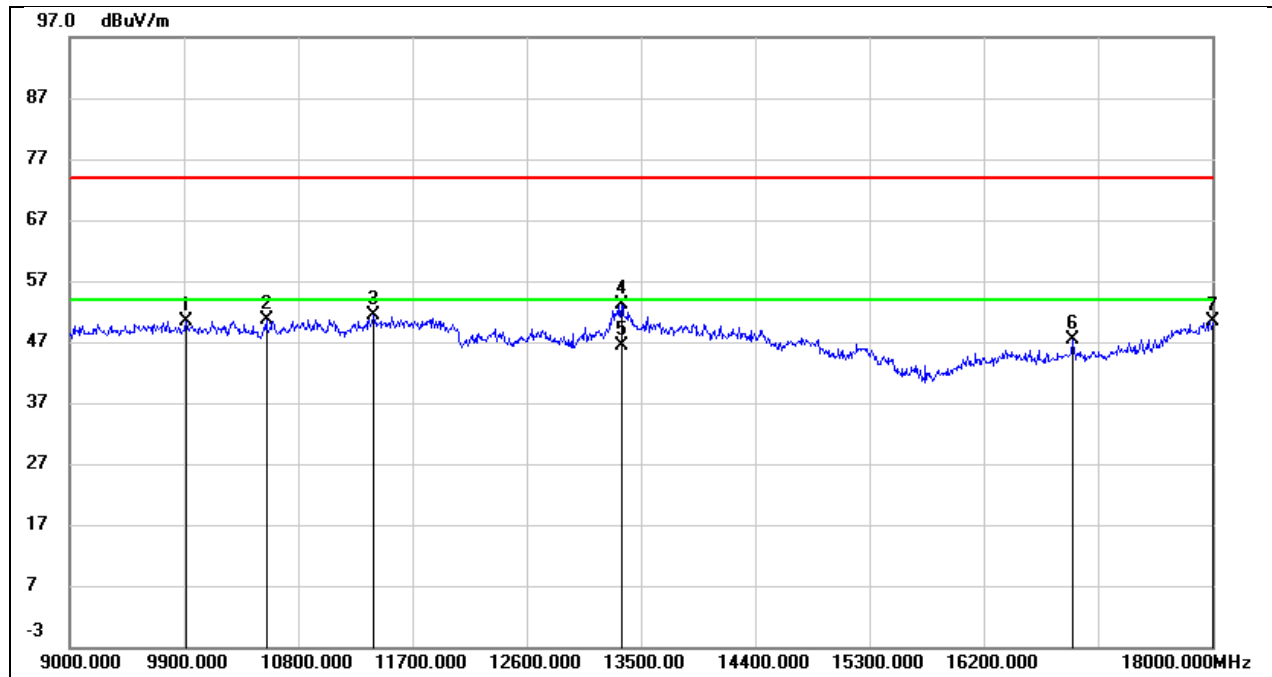


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9918.000	36.54	13.81	50.35	74.00	-23.65	peak
2	10548.000	36.29	14.31	50.60	74.00	-23.40	peak
3	11394.000	33.84	17.44	51.28	74.00	-22.72	peak
4	13347.000	31.45	21.58	53.03	74.00	-20.97	peak
5	13347.000	24.80	21.58	46.38	54.00	-7.62	AVG
7	18000.000	21.17	29.20	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6665
Polarity:	Vertical	Test Voltage:	DC 5V

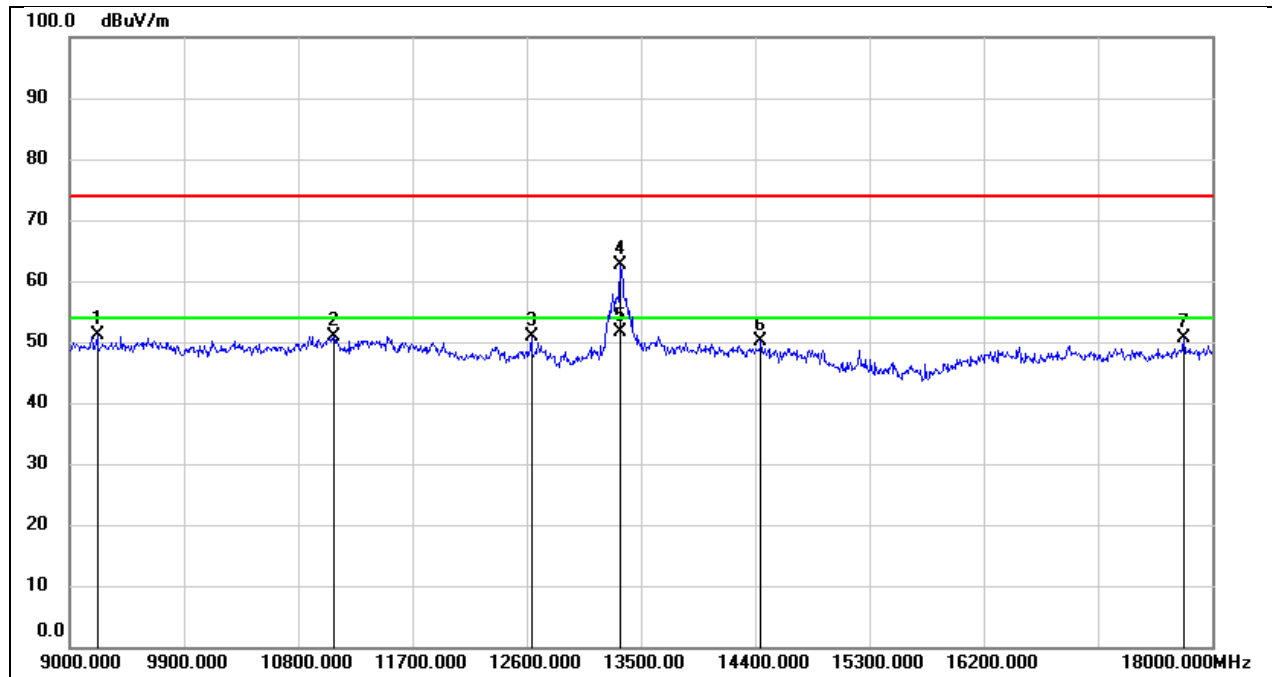


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9216.000	39.32	11.72	51.04	74.00	-22.96	peak
2	11079.000	35.96	14.92	50.88	74.00	-23.12	peak
3	12636.000	32.88	18.00	50.88	74.00	-23.12	peak
4	13338.000	42.59	20.00	62.59	74.00	-11.41	peak
5	13338.000	31.75	20.00	51.75	54.00	-2.25	AVG
6	14445.000	28.96	21.05	50.01	74.00	-23.99	peak
7	17775.000	24.79	25.88	50.67	74.00	-23.33	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6825
Polarity:	Horizontal	Test Voltage:	DC 5V

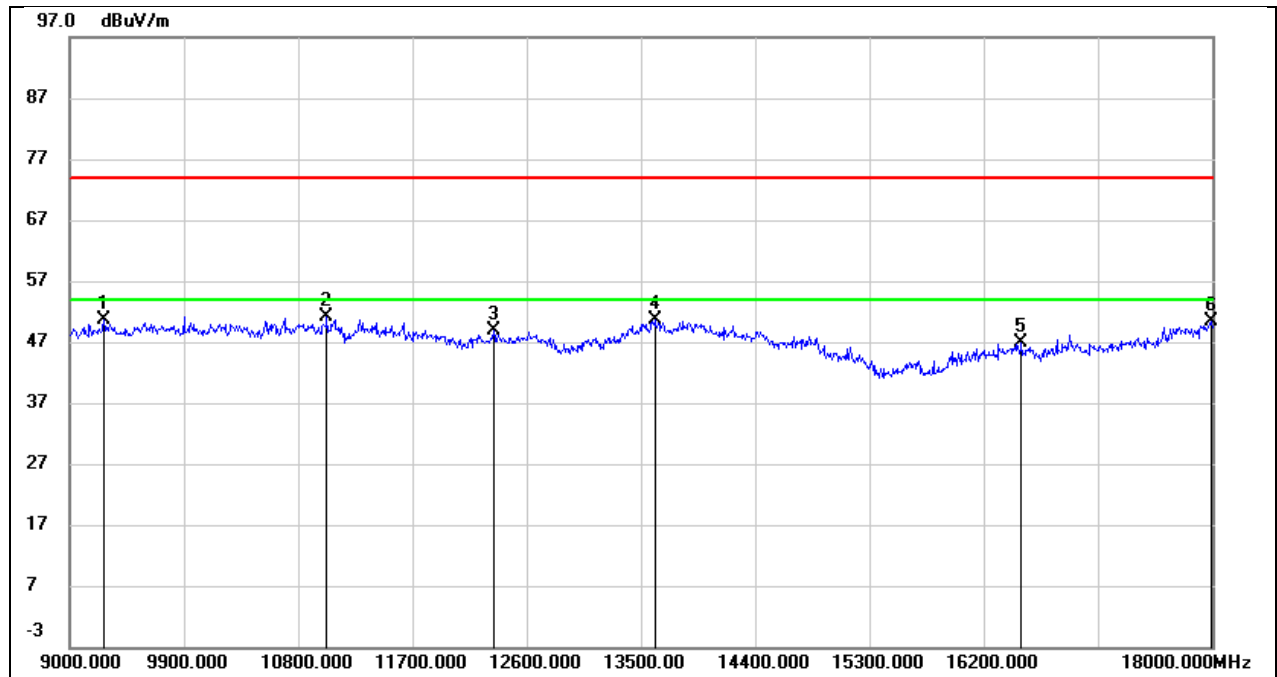


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9270.000	39.05	11.70	50.75	74.00	-23.25	peak
2	11025.000	35.44	15.57	51.01	74.00	-22.99	peak
3	12339.000	29.99	18.83	48.82	74.00	-25.18	peak
4	13608.000	28.32	22.43	50.75	74.00	-23.25	peak
5	16497.000	24.34	22.65	46.99	74.00	-27.01	peak
6	17991.000	21.36	29.11	50.47	74.00	-23.53	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6825
Polarity:	Vertical	Test Voltage:	DC 5V

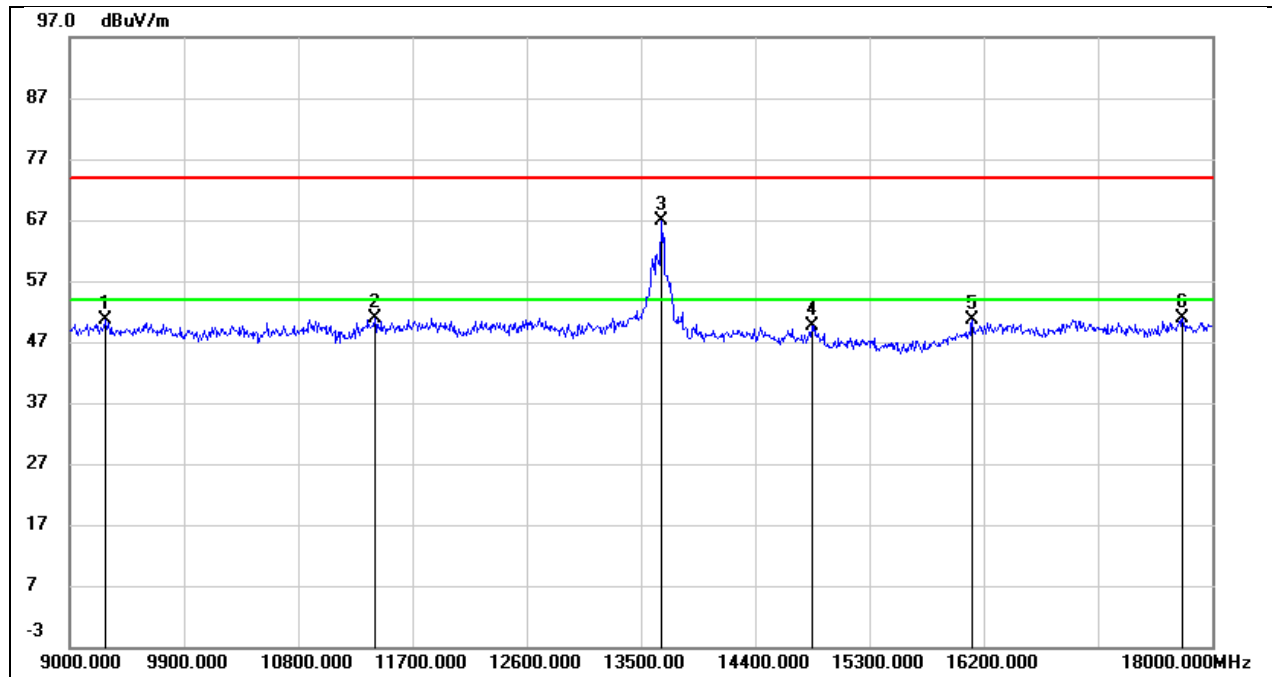


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9279.000	38.71	11.91	50.62	74.00	-23.38	peak
2	11403.000	34.75	16.12	50.87	74.00	-23.13	peak
3*	13662.000	46.10	20.84	66.94	68.20	-1.26	peak
4	14850.000	29.45	20.16	49.61	74.00	-24.39	peak
5	16110.000	26.74	23.85	50.59	74.00	-23.41	peak
6	17766.000	24.94	25.85	50.79	74.00	-23.21	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6985
Polarity:	Horizontal	Test Voltage:	DC 5V

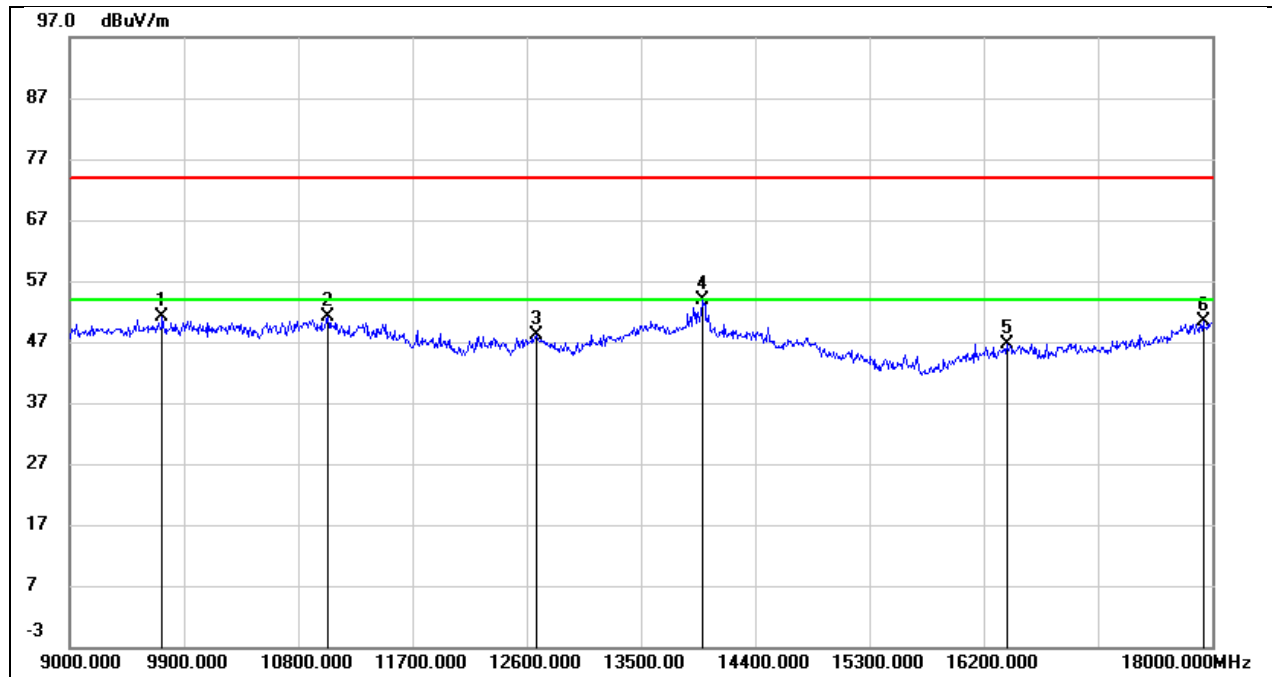


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9729.000	37.32	13.71	51.03	74.00	-22.97	peak
2	11034.000	35.41	15.60	51.01	74.00	-22.99	peak
3	12681.000	29.03	19.10	48.13	74.00	-25.87	peak
4	13986.000	30.71	23.21	53.92	74.00	-20.08	peak
5	16380.000	24.09	22.64	46.73	74.00	-27.27	peak
6	17928.000	21.89	28.51	50.40	74.00	-23.60	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	6985
Polarity:	Vertical	Test Voltage:	DC 5V

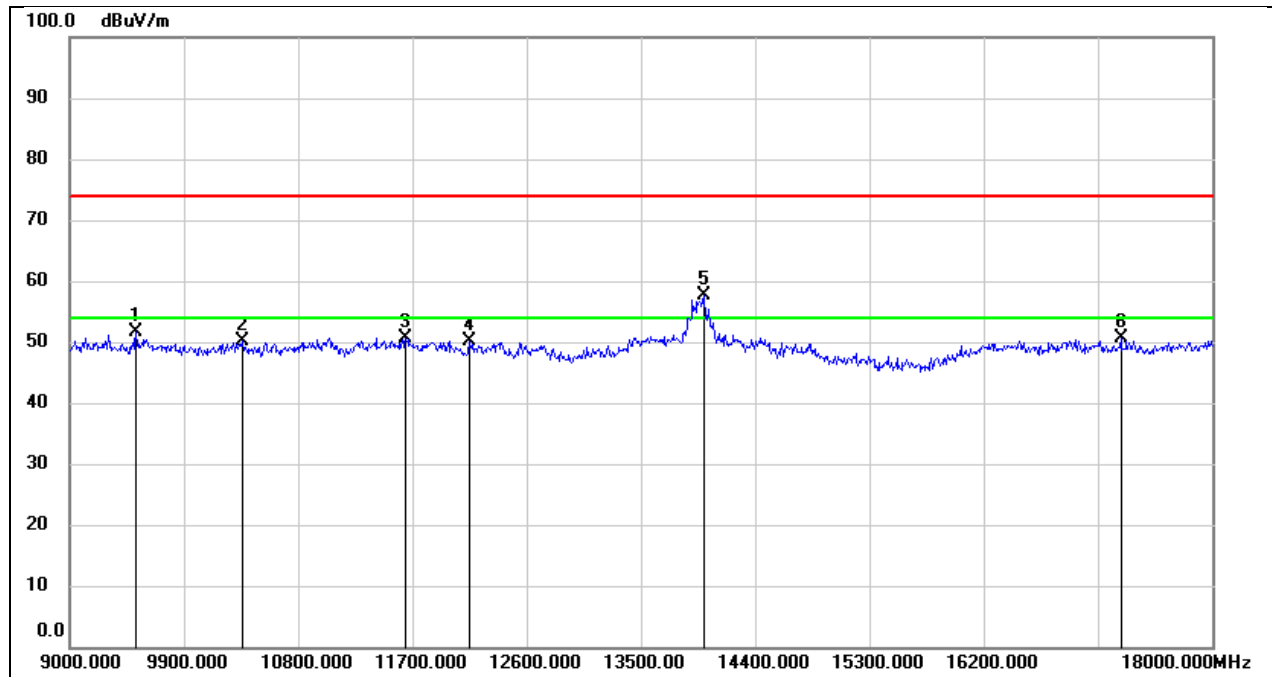


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9522.000	38.81	12.91	51.72	74.00	-22.28	peak
2	10359.000	36.71	13.49	50.20	74.00	-23.80	peak
3	11646.000	33.52	17.16	50.68	74.00	-23.32	peak
4	12150.000	32.52	17.71	50.23	74.00	-23.77	peak
5*	13995.000	36.08	21.63	57.71	68.20	-10.49	peak
6	17280.000	25.89	24.82	50.71	74.00	-23.29	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

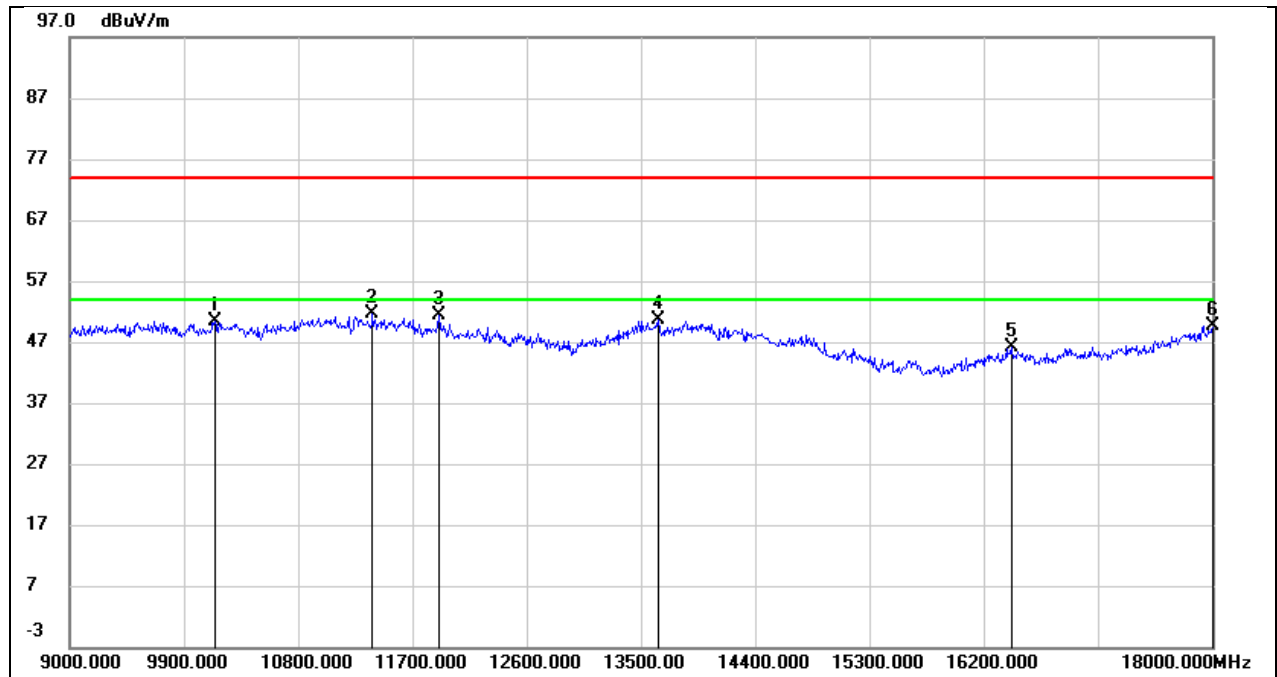


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10143.000	36.69	13.68	50.37	74.00	-23.63	peak
2	11385.000	34.14	17.40	51.54	74.00	-22.46	peak
3	11907.000	32.65	18.68	51.33	74.00	-22.67	peak
4	13635.000	28.04	22.48	50.52	74.00	-23.48	peak
5	16416.000	23.40	22.64	46.04	74.00	-27.96	peak
6	18000.000	20.35	29.20	49.55	74.00	-24.45	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 5V

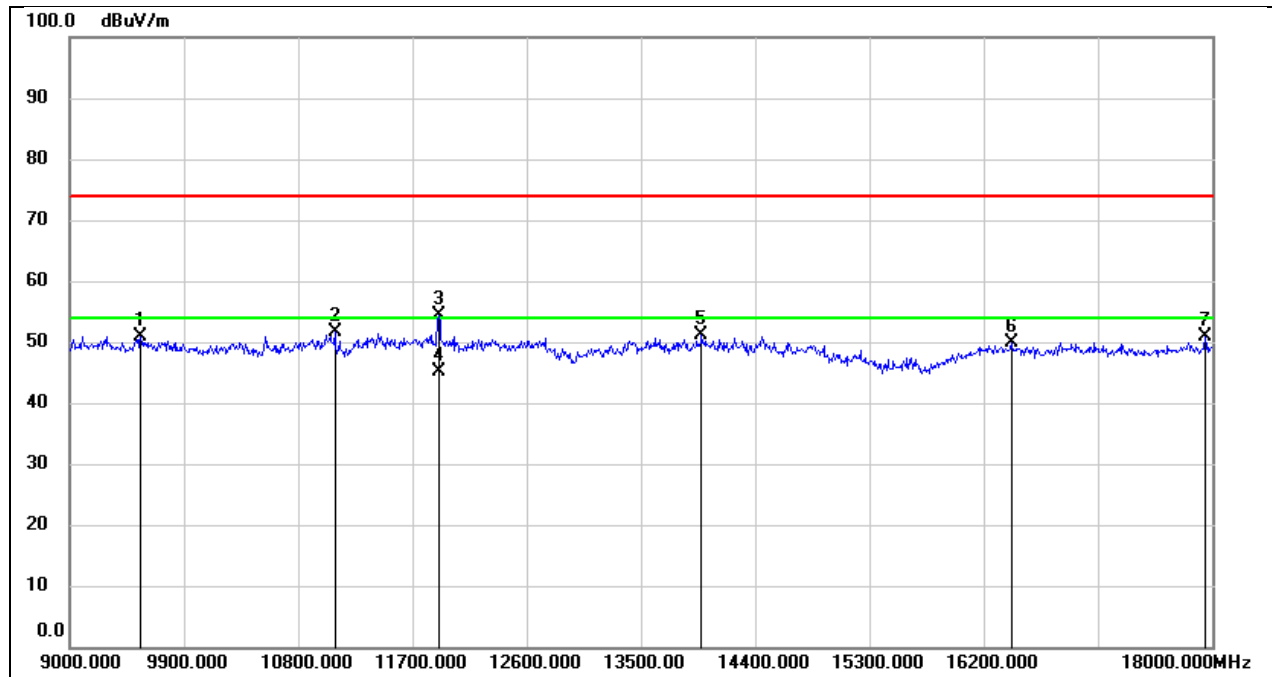


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9558.000	37.89	13.07	50.96	74.00	-23.04	peak
2	11088.000	36.69	14.95	51.64	74.00	-22.36	peak
3	11907.000	36.85	17.51	54.36	74.00	-19.64	peak
4	11907.000	27.54	17.51	45.05	54.00	-8.95	AVG
5	13977.000	29.53	21.58	51.11	74.00	-22.89	peak
6	16416.000	25.39	24.46	49.85	74.00	-24.15	peak
7	17946.000	24.05	26.73	50.78	74.00	-23.22	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6175
Polarity:	Horizontal	Test Voltage:	DC 5V

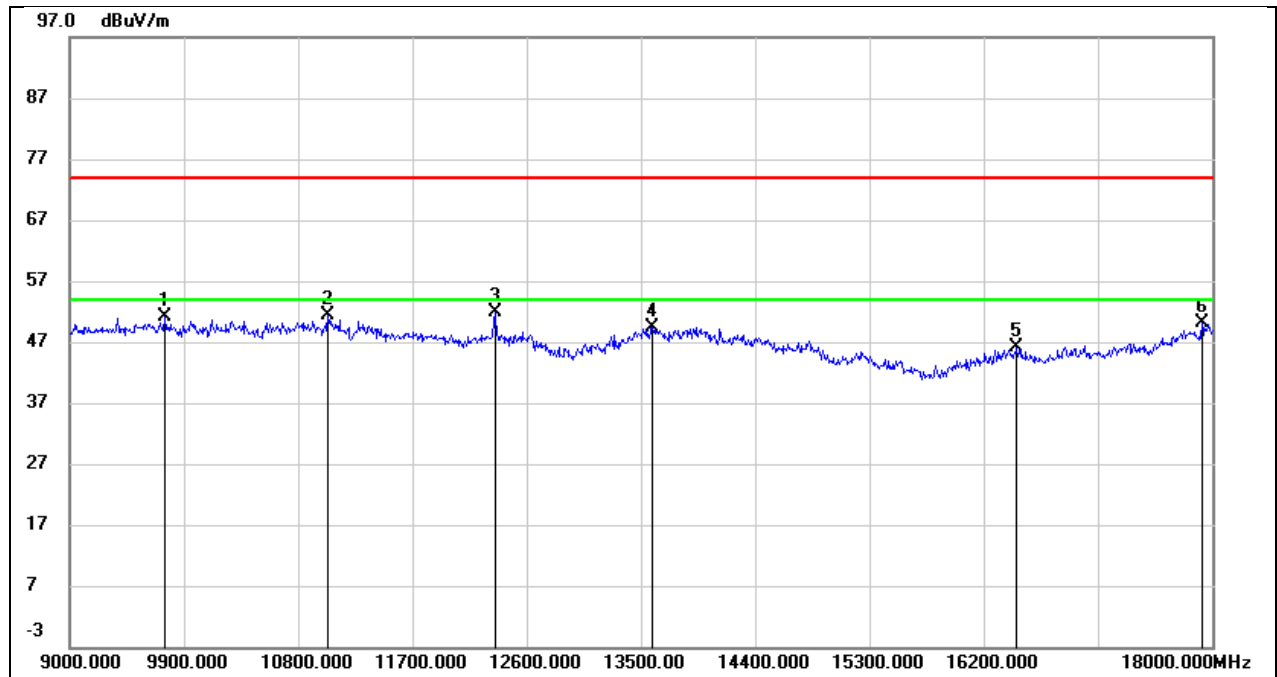


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9747.000	37.37	13.76	51.13	74.00	-22.87	peak
2	11034.000	35.68	15.60	51.28	74.00	-22.72	peak
3	12348.000	33.04	18.84	51.88	74.00	-22.12	peak
4	13590.000	27.04	22.40	49.44	74.00	-24.56	peak
5	16461.000	23.42	22.64	46.06	74.00	-27.94	peak
6	17919.000	21.77	28.42	50.19	74.00	-23.81	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6175
Polarity:	Vertical	Test Voltage:	DC 5V

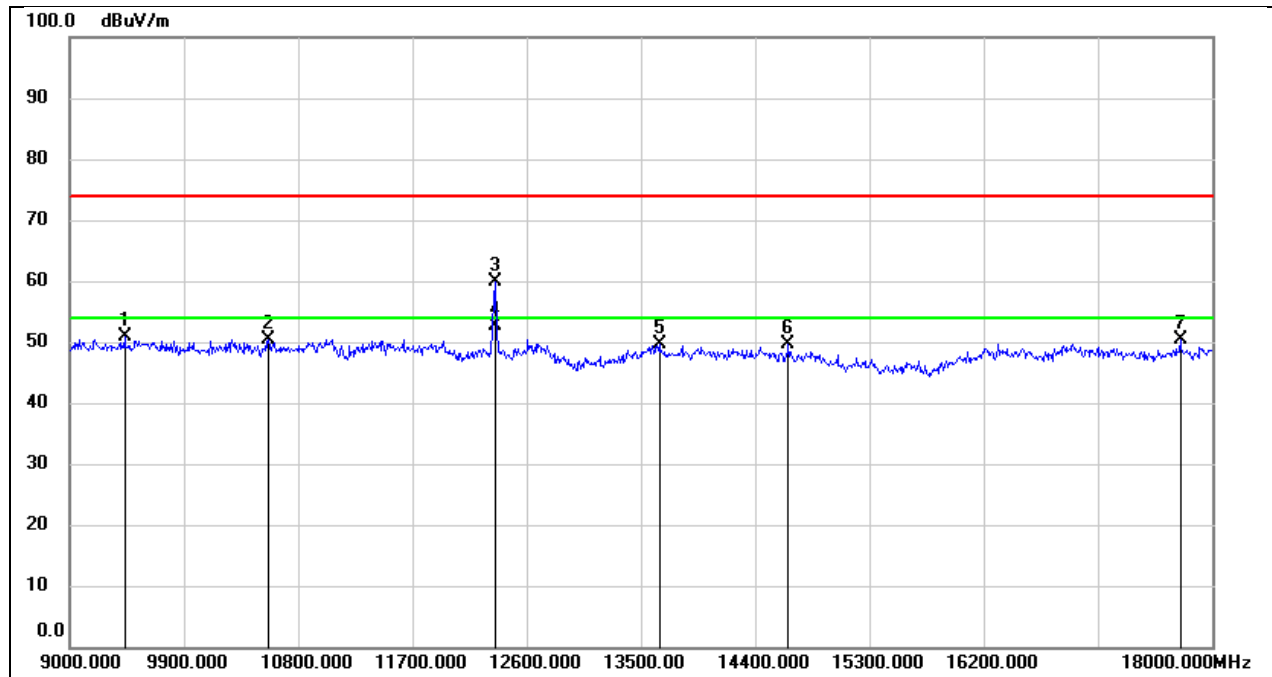


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9432.000	38.31	12.45	50.76	74.00	-23.24	peak
2	10566.000	36.36	14.09	50.45	74.00	-23.55	peak
3	12348.000	41.98	17.88	59.86	74.00	-14.14	peak
4	12348.000	34.84	17.88	52.72	54.00	-1.28	AVG
5	13644.000	28.73	20.82	49.55	74.00	-24.45	peak
6	14661.000	29.04	20.60	49.64	74.00	-24.36	peak
7	17748.000	24.57	25.78	50.35	74.00	-23.65	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6415
Polarity:	Horizontal	Test Voltage:	DC 5V

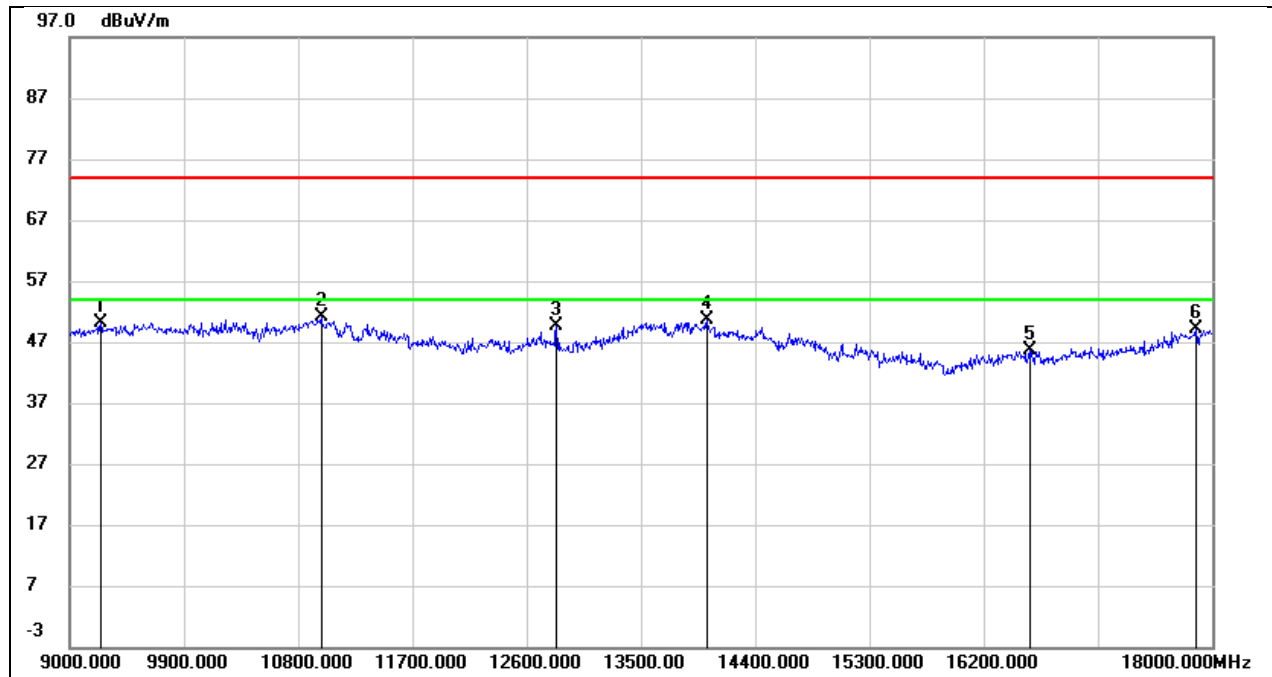


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9243.000	38.61	11.61	50.22	74.00	-23.78	peak
2	10980.000	35.77	15.40	51.17	74.00	-22.83	peak
3	12834.000	30.02	19.50	49.52	74.00	-24.48	peak
4	14022.000	27.42	23.17	50.59	74.00	-23.41	peak
5	16560.000	23.02	22.54	45.56	74.00	-28.44	peak
6	17874.000	21.01	28.00	49.01	74.00	-24.99	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6415
Polarity:	Vertical	Test Voltage:	DC 5V

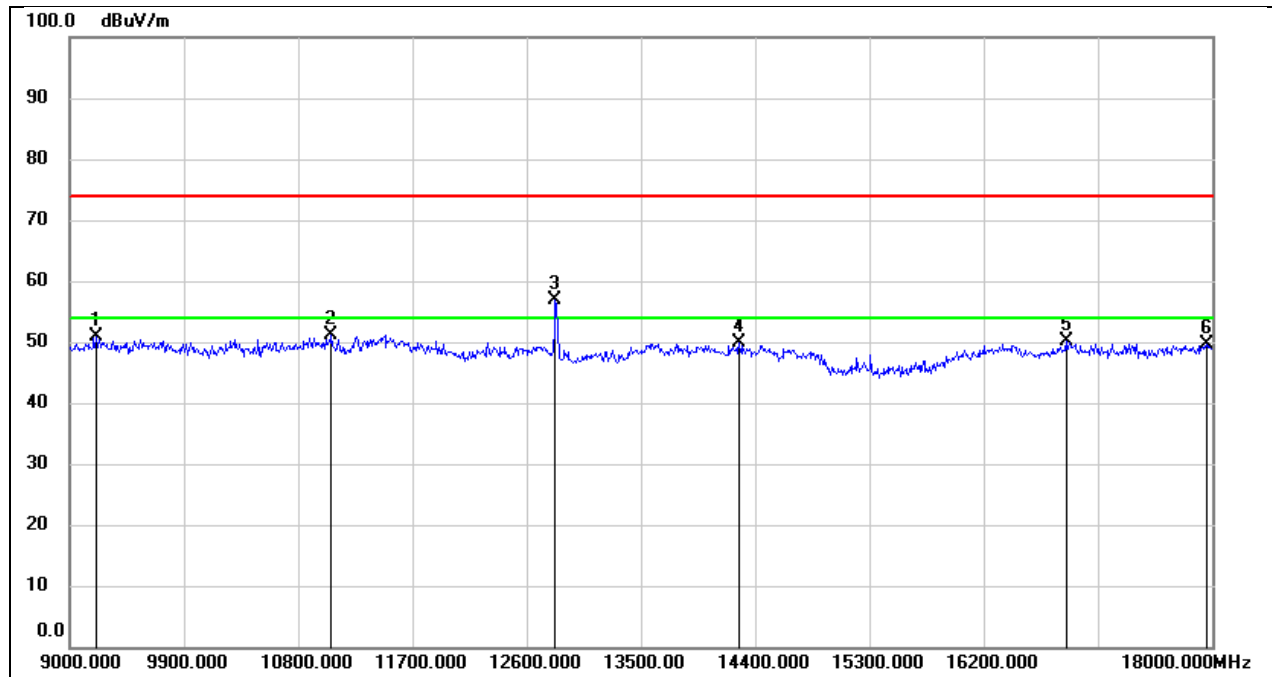


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9207.000	39.08	11.71	50.79	74.00	-23.21	peak
2	11061.000	36.30	14.86	51.16	74.00	-22.84	peak
3*	12825.000	38.43	18.38	56.81	68.20	-11.39	peak
4	14274.000	28.52	21.35	49.87	74.00	-24.13	peak
5	16848.000	25.79	24.42	50.21	74.00	-23.79	peak
6	17955.000	22.87	26.77	49.64	74.00	-24.36	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6435
Polarity:	Horizontal	Test Voltage:	DC 5V

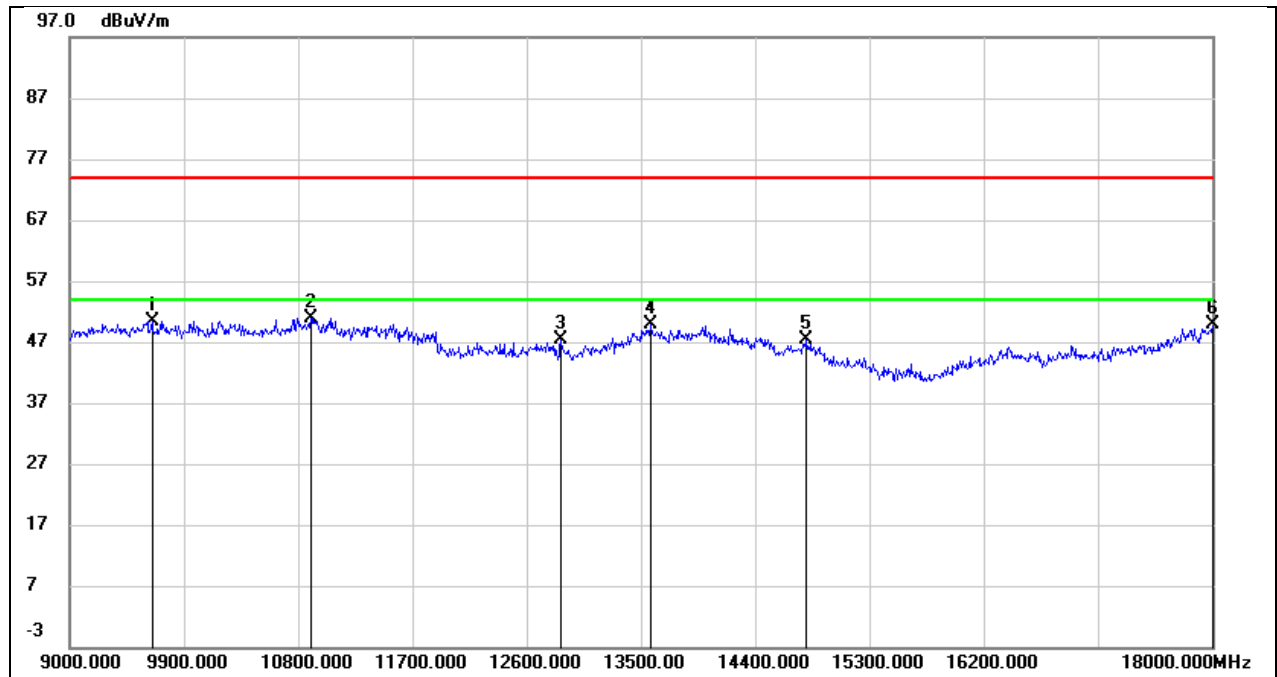


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9648.000	36.99	13.50	50.49	74.00	-23.51	peak
2	10899.000	35.78	15.21	50.99	74.00	-23.01	peak
3	12870.000	27.92	19.57	47.49	74.00	-26.51	peak
4	13572.000	27.62	22.37	49.99	74.00	-24.01	peak
5	14805.000	27.55	19.94	47.49	74.00	-26.51	peak
6	18000.000	20.57	29.20	49.77	74.00	-24.23	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6435
Polarity:	Vertical	Test Voltage:	DC 5V

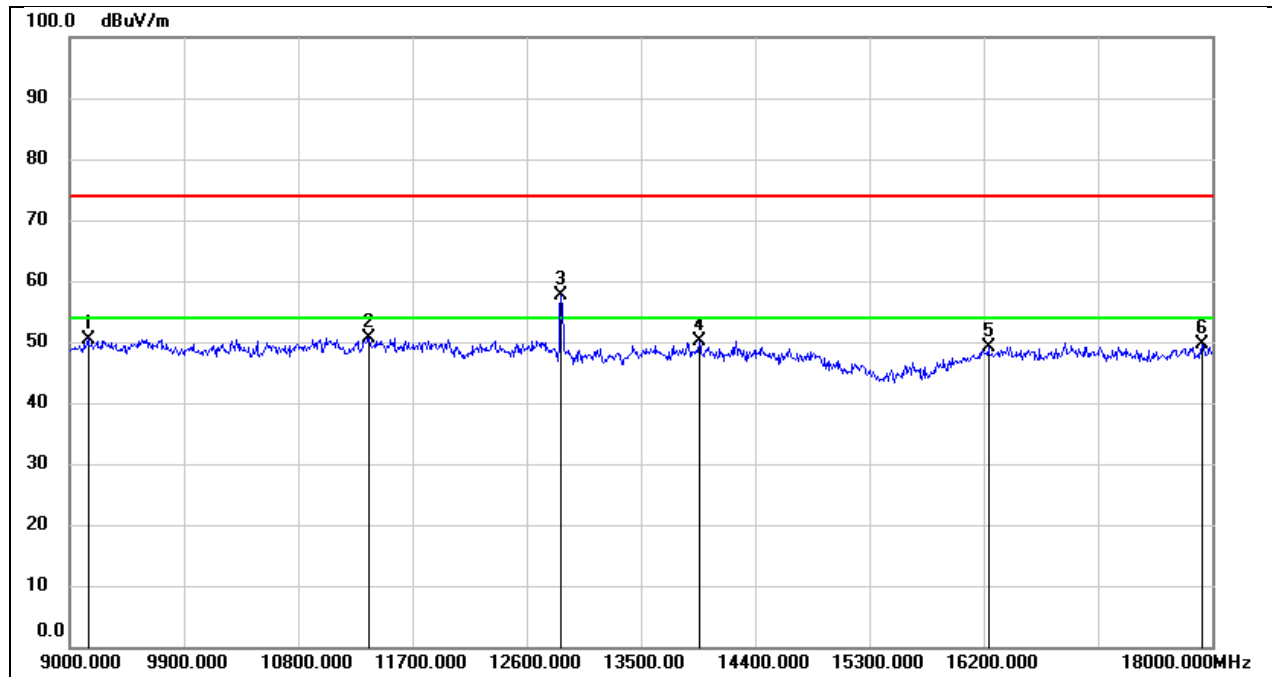


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9144.000	38.95	11.55	50.50	74.00	-23.50	peak
2	11358.000	34.76	15.95	50.71	74.00	-23.29	peak
3*	12870.000	39.26	18.45	57.71	68.20	-10.49	peak
4	13959.000	28.71	21.53	50.24	74.00	-23.76	peak
5	16236.000	24.54	24.69	49.23	74.00	-24.77	peak
6	17919.000	23.00	26.58	49.58	74.00	-24.42	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6475
Polarity:	Horizontal	Test Voltage:	DC 5V

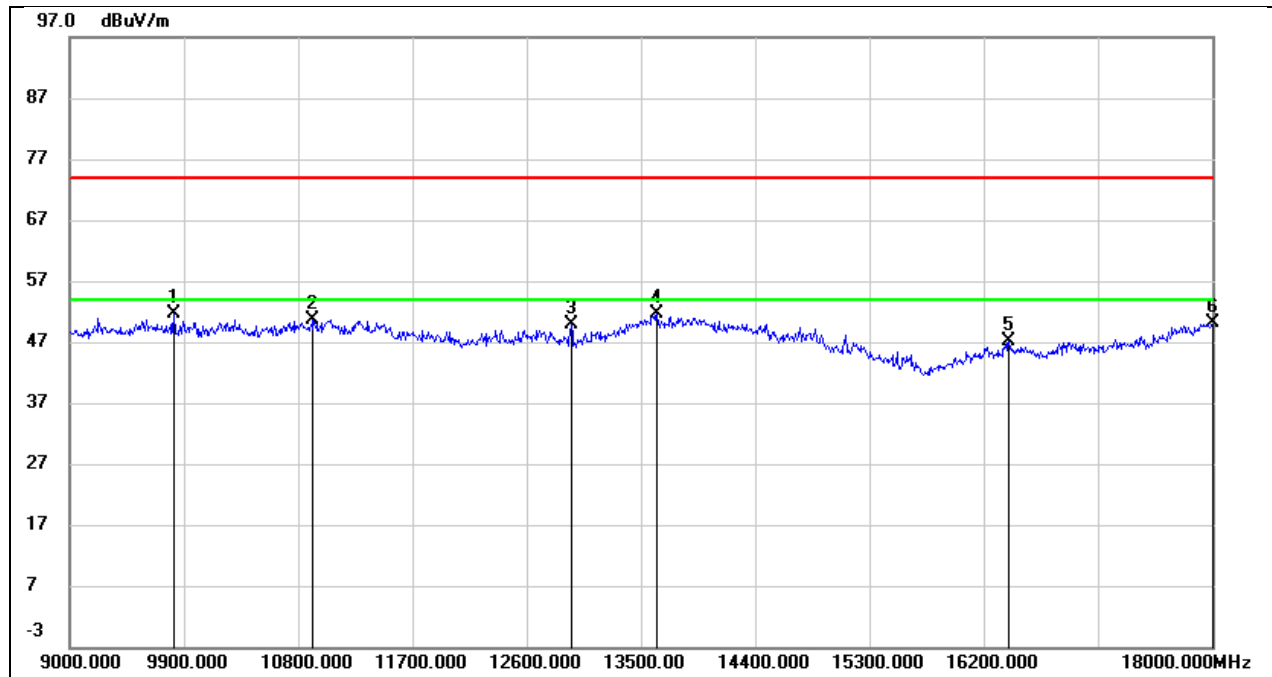


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9819.000	37.69	13.87	51.56	74.00	-22.44	peak
2	10917.000	35.33	15.26	50.59	74.00	-23.41	peak
3	12951.000	30.13	19.75	49.88	74.00	-24.12	peak
4	13626.000	29.27	22.46	51.73	74.00	-22.27	peak
5	16398.000	24.39	22.64	47.03	74.00	-26.97	peak
6	18000.000	20.86	29.20	50.06	74.00	-23.94	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6475
Polarity:	Vertical	Test Voltage:	DC 5V

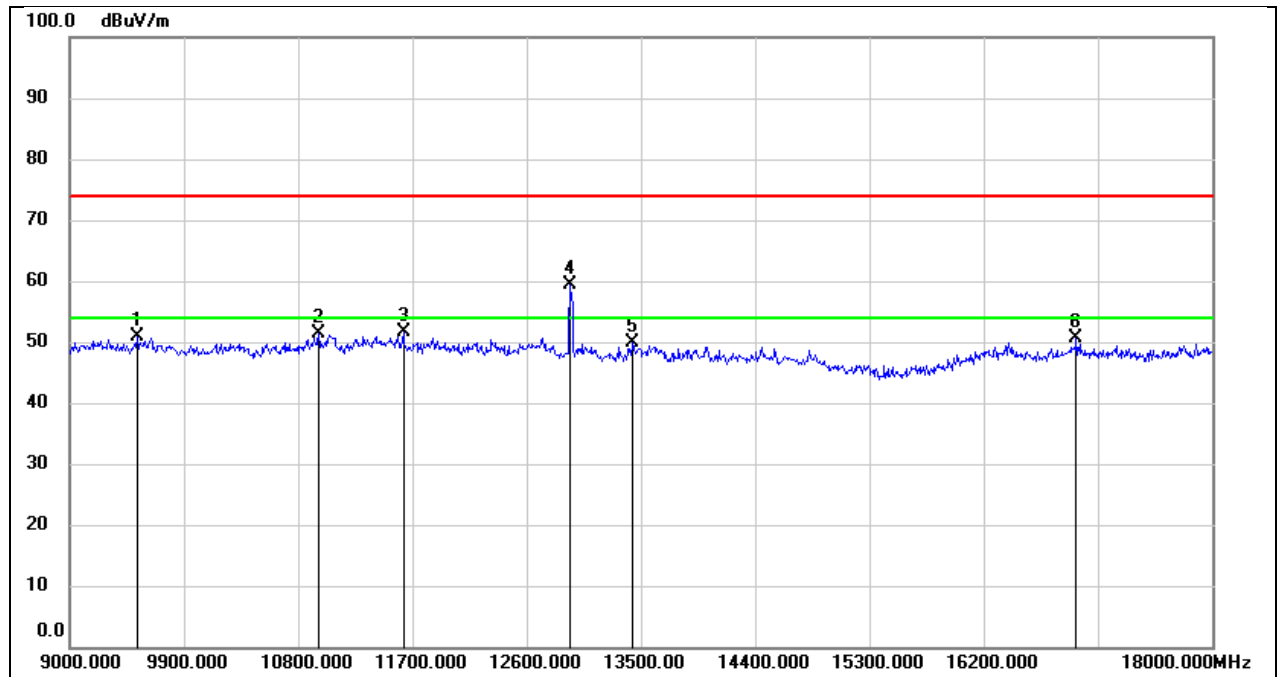


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9531.000	37.88	12.95	50.83	74.00	-23.17	peak
2	10962.000	36.82	14.61	51.43	74.00	-22.57	peak
3	11628.000	34.52	17.15	51.67	74.00	-22.33	peak
4*	12942.000	40.71	18.57	59.28	68.20	-8.92	peak
5	13437.000	29.45	20.34	49.79	74.00	-24.21	peak
6	16929.000	25.96	24.62	50.58	74.00	-23.42	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6515
Polarity:	Horizontal	Test Voltage:	DC 5V

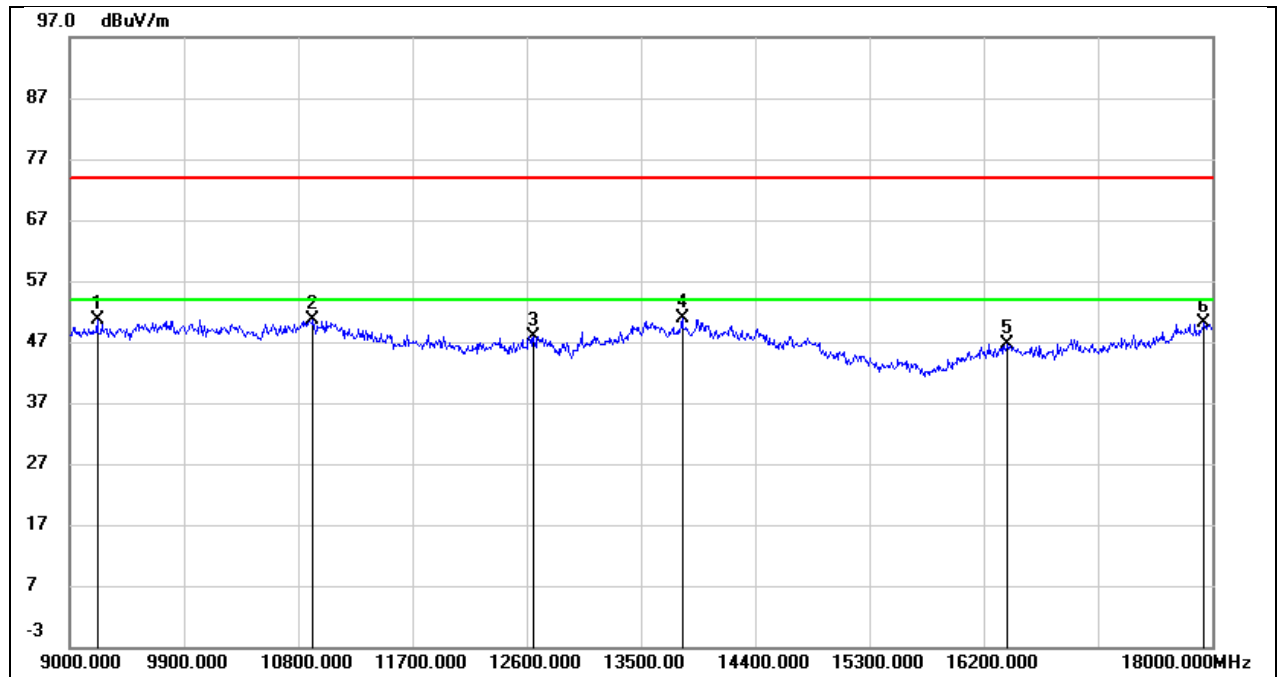


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9216.000	39.21	11.50	50.71	74.00	-23.29	peak
2	10917.000	35.29	15.26	50.55	74.00	-23.45	peak
3	12654.000	28.96	19.03	47.99	74.00	-26.01	peak
4	13824.000	28.15	22.80	50.95	74.00	-23.05	peak
5	16389.000	24.06	22.64	46.70	74.00	-27.30	peak
6	17937.000	21.49	28.60	50.09	74.00	-23.91	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6515
Polarity:	Vertical	Test Voltage:	DC 5V

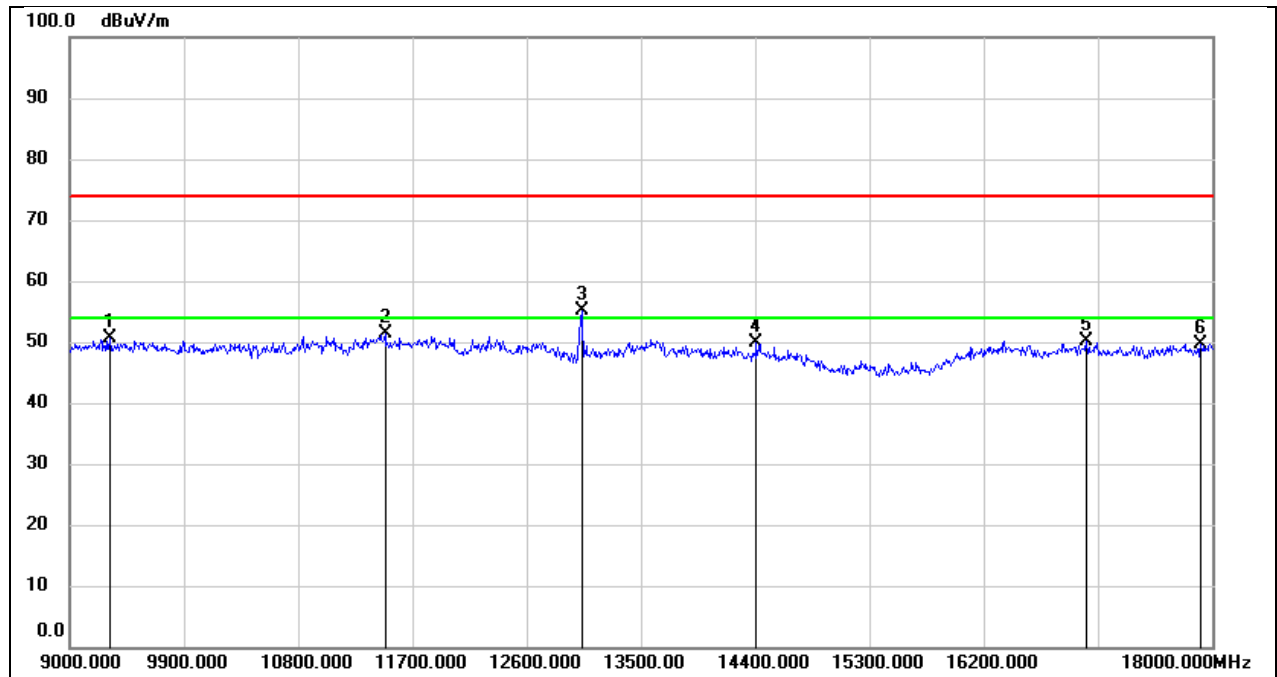


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9315.000	38.57	12.02	50.59	74.00	-23.41	peak
2	11484.000	34.83	16.52	51.35	74.00	-22.65	peak
3*	13032.000	36.24	18.79	55.03	68.20	-13.17	peak
4	14409.000	28.69	21.12	49.81	74.00	-24.19	peak
5	17010.000	25.35	24.80	50.15	74.00	-23.85	peak
6	17910.000	23.13	26.54	49.67	74.00	-24.33	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6535
Polarity:	Horizontal	Test Voltage:	DC 5V

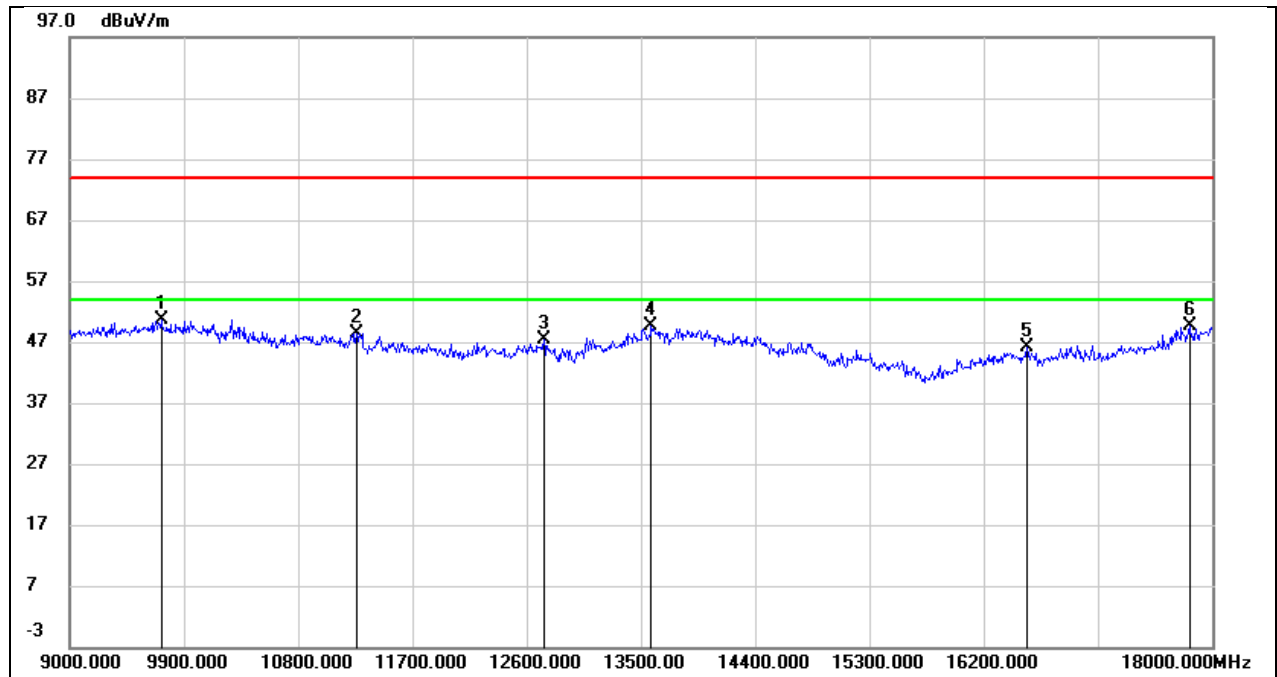


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9720.000	36.85	13.69	50.54	74.00	-23.46	peak
2	11259.000	31.74	16.72	48.46	74.00	-25.54	peak
3	12735.000	28.05	19.25	47.30	74.00	-26.70	peak
4	13581.000	27.20	22.38	49.58	74.00	-24.42	peak
5	16542.000	23.56	22.58	46.14	74.00	-27.86	peak
6	17820.000	22.04	27.48	49.52	74.00	-24.48	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6535
Polarity:	Vertical	Test Voltage:	DC 5V

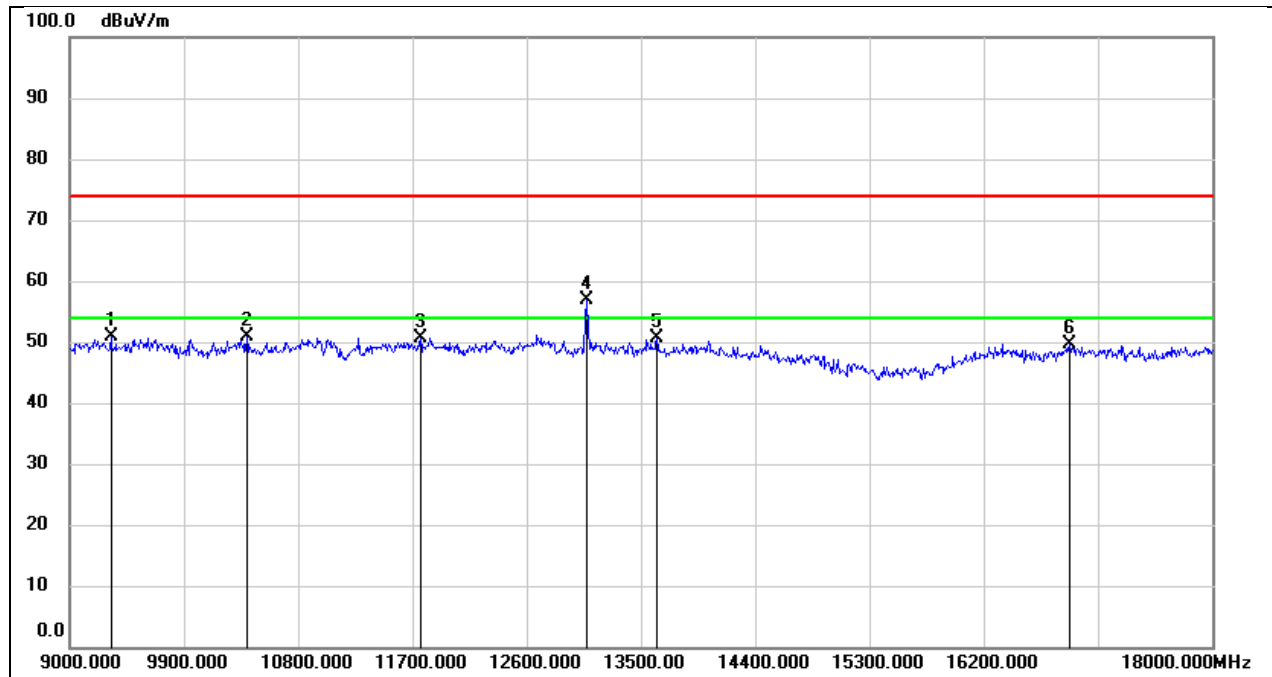


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9324.000	38.88	12.05	50.93	74.00	-23.07	peak
2	10395.000	37.22	13.57	50.79	74.00	-23.21	peak
3	11763.000	33.27	17.24	50.51	74.00	-23.49	peak
4*	13068.000	37.82	18.94	56.76	68.20	-11.44	peak
5	13626.000	29.80	20.79	50.59	74.00	-23.41	peak
6	16875.000	25.23	24.47	49.70	74.00	-24.30	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6715
Polarity:	Horizontal	Test Voltage:	DC 5V

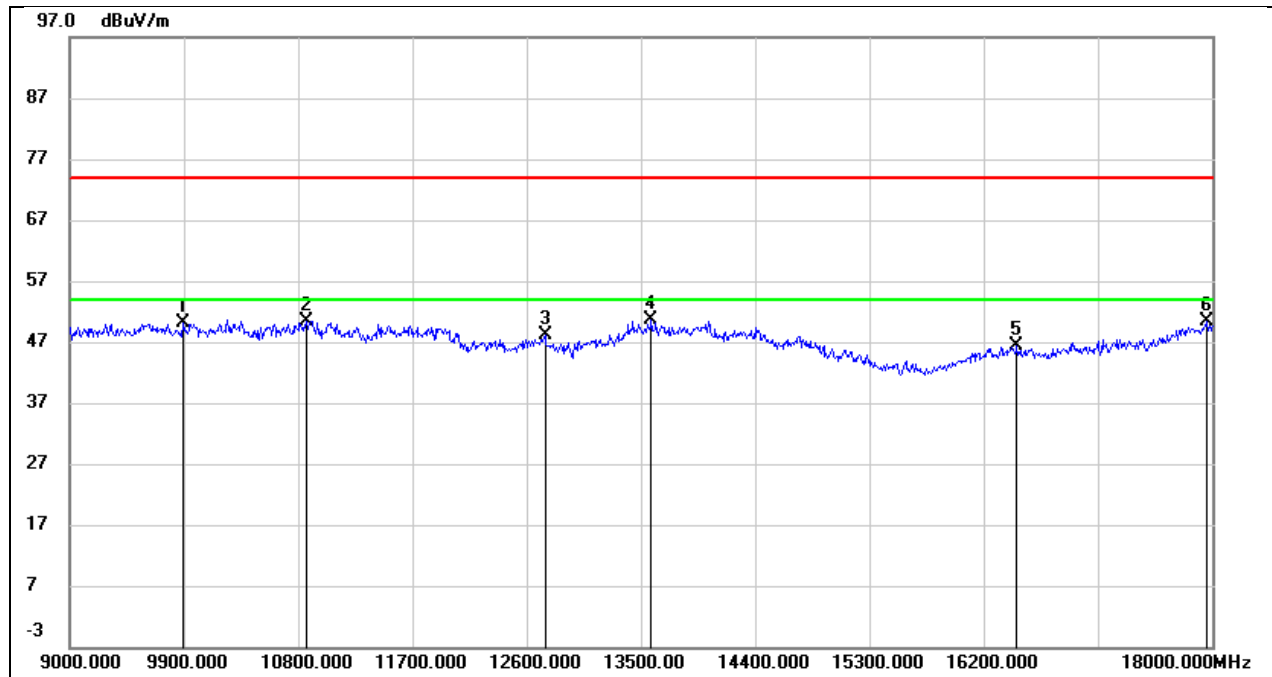


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9891.000	36.19	13.83	50.02	74.00	-23.98	peak
2	10863.000	35.28	15.12	50.40	74.00	-23.60	peak
3	12744.000	28.86	19.27	48.13	74.00	-25.87	peak
4	13581.000	28.18	22.38	50.56	74.00	-23.44	peak
5	16461.000	23.75	22.64	46.39	74.00	-27.61	peak
6	17955.000	21.62	28.77	50.39	74.00	-23.61	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6715
Polarity:	Vertical	Test Voltage:	DC 5V

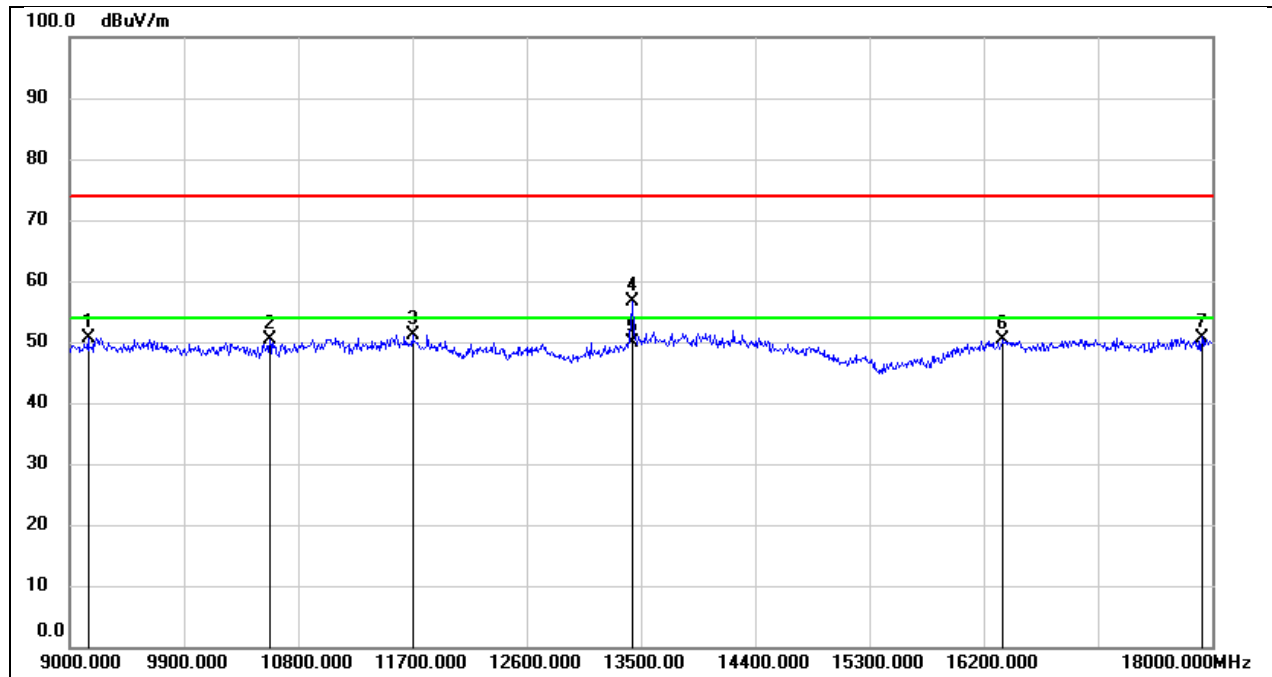


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9144.000	38.98	11.55	50.53	74.00	-23.47	peak
2	10575.000	36.31	14.11	50.42	74.00	-23.58	peak
3	11700.000	34.05	17.20	51.25	74.00	-22.75	peak
4	13437.000	36.36	20.34	56.70	74.00	-17.30	peak
5	13437.000	29.49	20.34	49.83	54.00	-4.17	AVG
6	16353.000	25.89	24.54	50.43	74.00	-23.57	peak
7	17919.000	24.17	26.58	50.75	74.00	-23.25	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6855
Polarity:	Horizontal	Test Voltage:	DC 5V

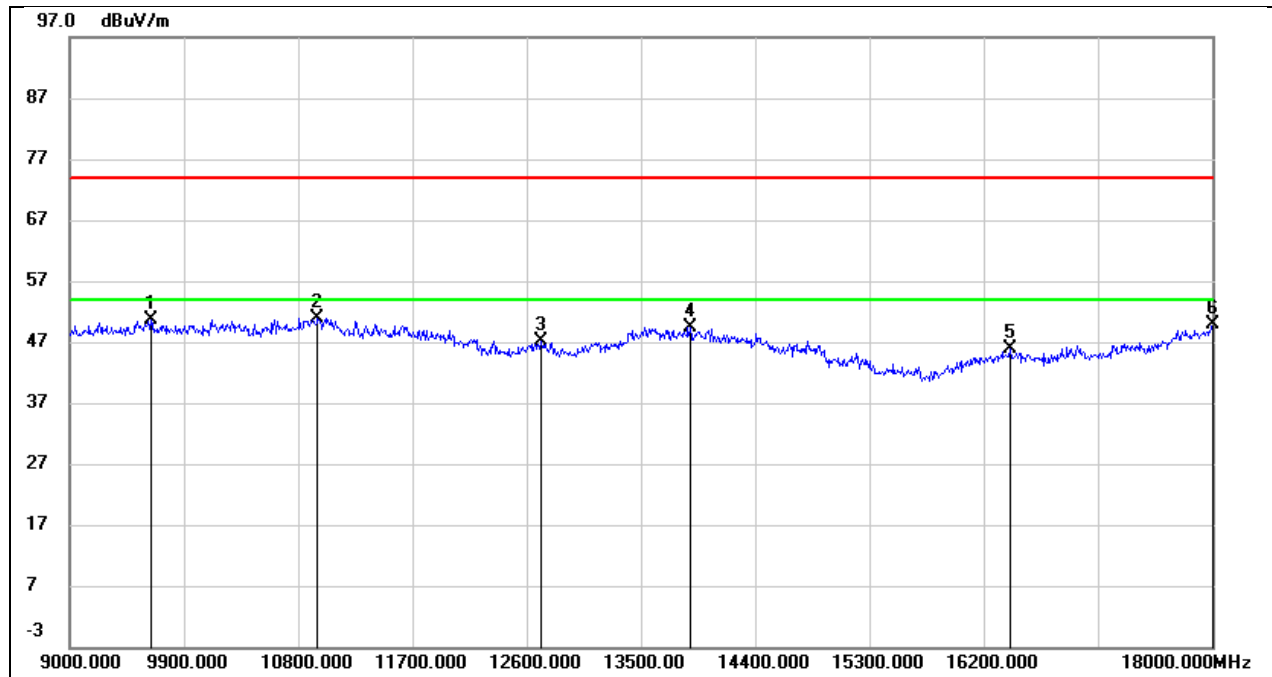


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9639.000	37.23	13.48	50.71	74.00	-23.29	peak
2	10953.000	35.64	15.35	50.99	74.00	-23.01	peak
3	12708.000	27.86	19.17	47.03	74.00	-26.97	peak
4	13887.000	26.48	22.96	49.44	74.00	-24.56	peak
5	16407.000	23.16	22.64	45.80	74.00	-28.20	peak
6	18000.000	20.78	29.20	49.98	74.00	-24.02	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6855
Polarity:	Vertical	Test Voltage:	DC 5V

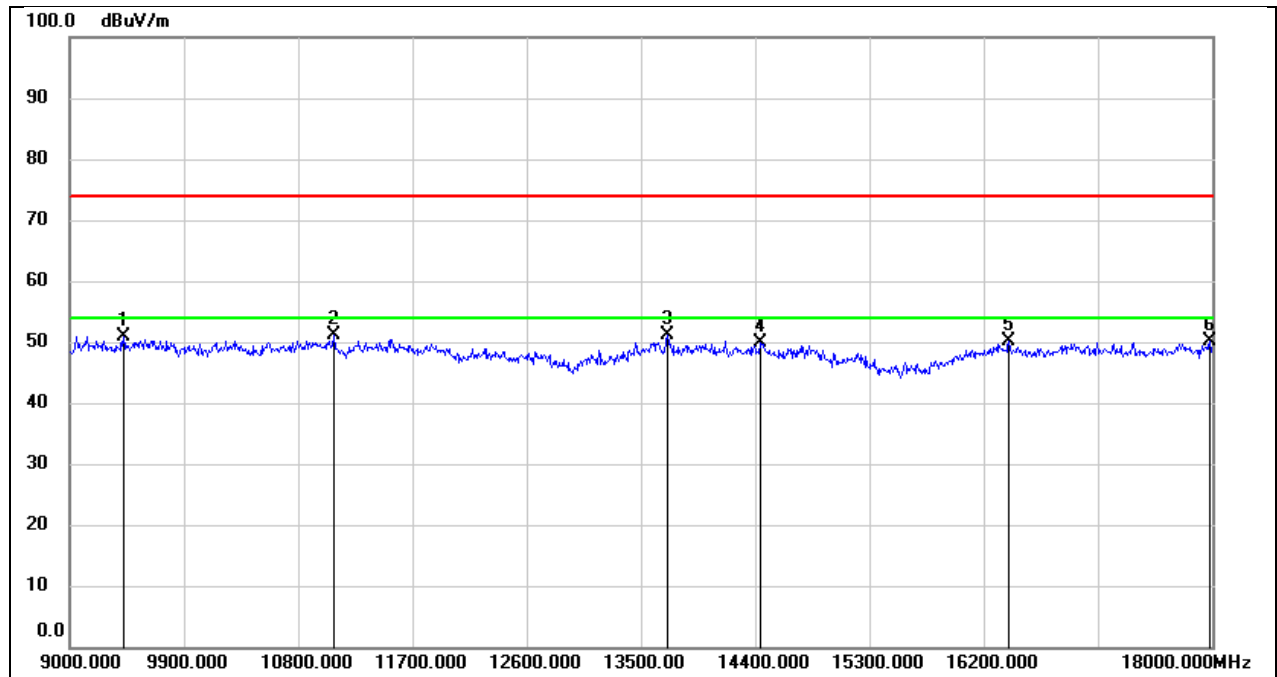


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9423.000	38.60	12.40	51.00	74.00	-23.00	peak
2	11079.000	36.17	14.92	51.09	74.00	-22.91	peak
3	13707.000	30.30	20.93	51.23	74.00	-22.77	peak
4	14445.000	28.89	21.05	49.94	74.00	-24.06	peak
5	16398.000	25.66	24.48	50.14	74.00	-23.86	peak
6	17982.000	23.20	26.91	50.11	74.00	-23.89	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6875
Polarity:	Horizontal	Test Voltage:	DC 5V

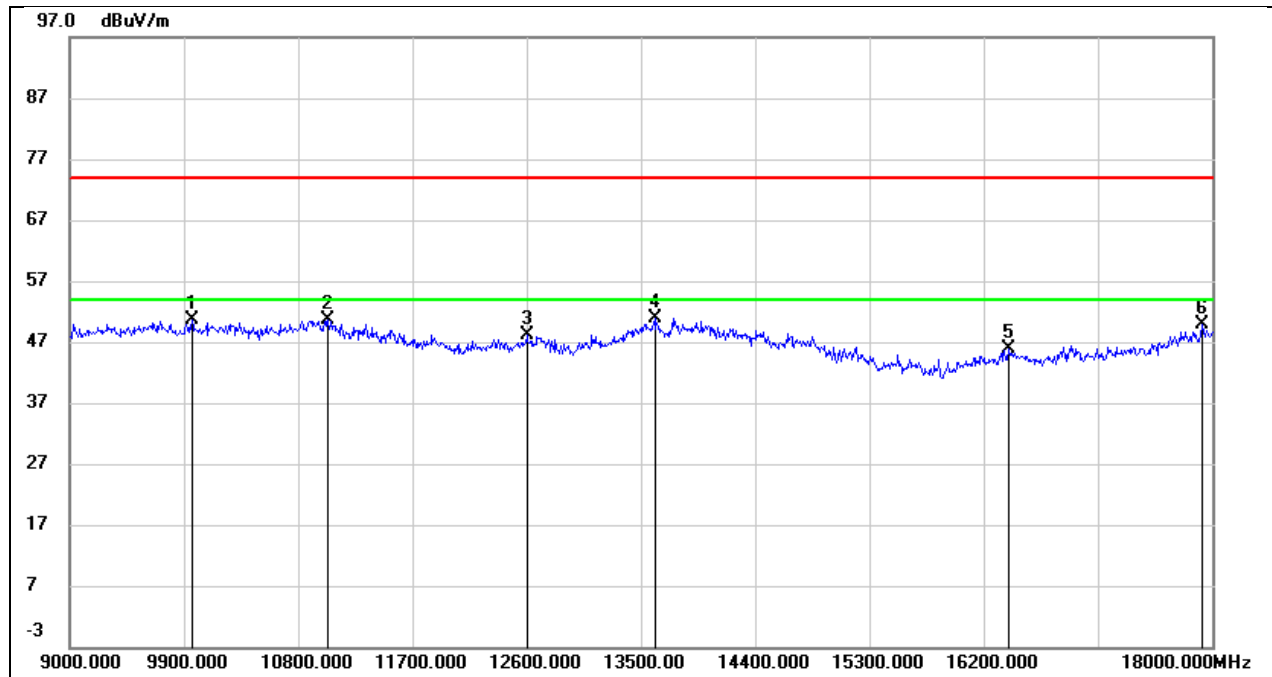


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9963.000	36.88	13.78	50.66	74.00	-23.34	peak
2	11034.000	34.96	15.60	50.56	74.00	-23.44	peak
3	12600.000	29.24	18.88	48.12	74.00	-25.88	peak
4	13608.000	28.44	22.43	50.87	74.00	-23.13	peak
5	16398.000	23.29	22.64	45.93	74.00	-28.07	peak
6	17919.000	21.39	28.42	49.81	74.00	-24.19	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	6875
Polarity:	Vertical	Test Voltage:	DC 5V

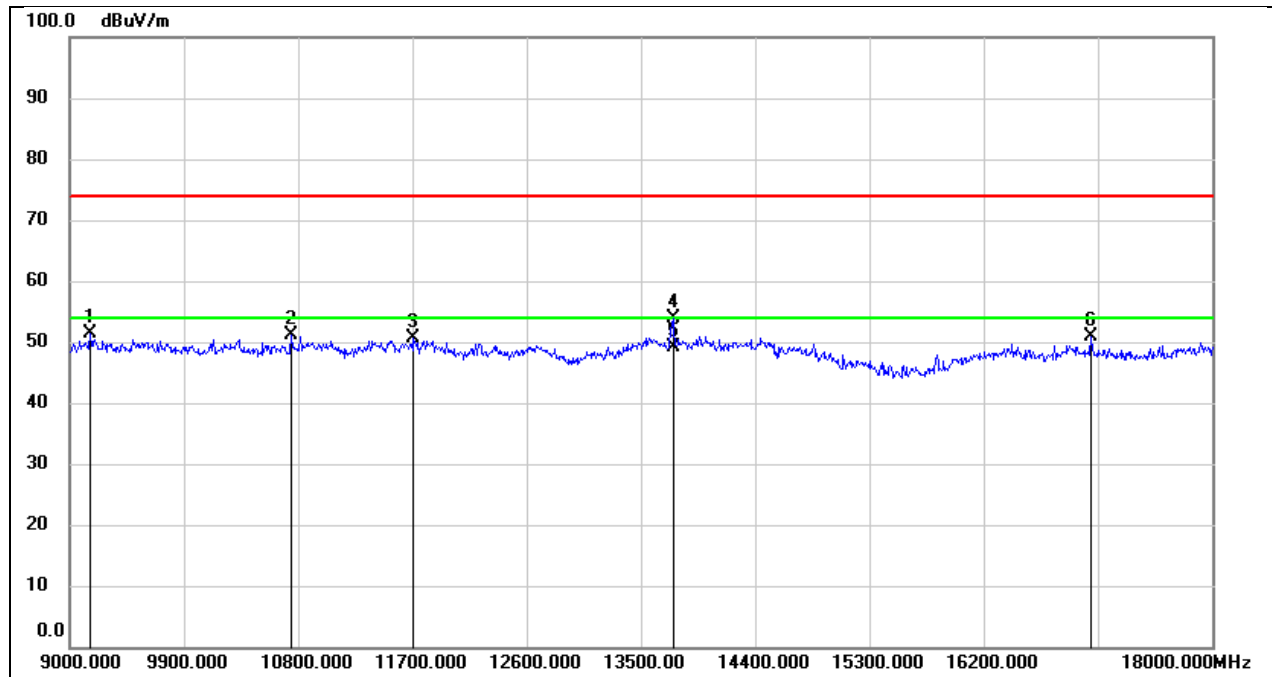


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9162.000	39.76	11.59	51.35	74.00	-22.65	peak
2	10746.000	36.68	14.35	51.03	74.00	-22.97	peak
3	11709.000	33.31	17.21	50.52	74.00	-23.48	peak
4	13752.000	32.87	21.01	53.88	74.00	-20.12	peak
5	13752.000	28.03	21.01	49.04	/	/	AVG
6	17046.000	26.10	24.80	50.90	74.00	-23.10	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	7015
Polarity:	Horizontal	Test Voltage:	DC 5V

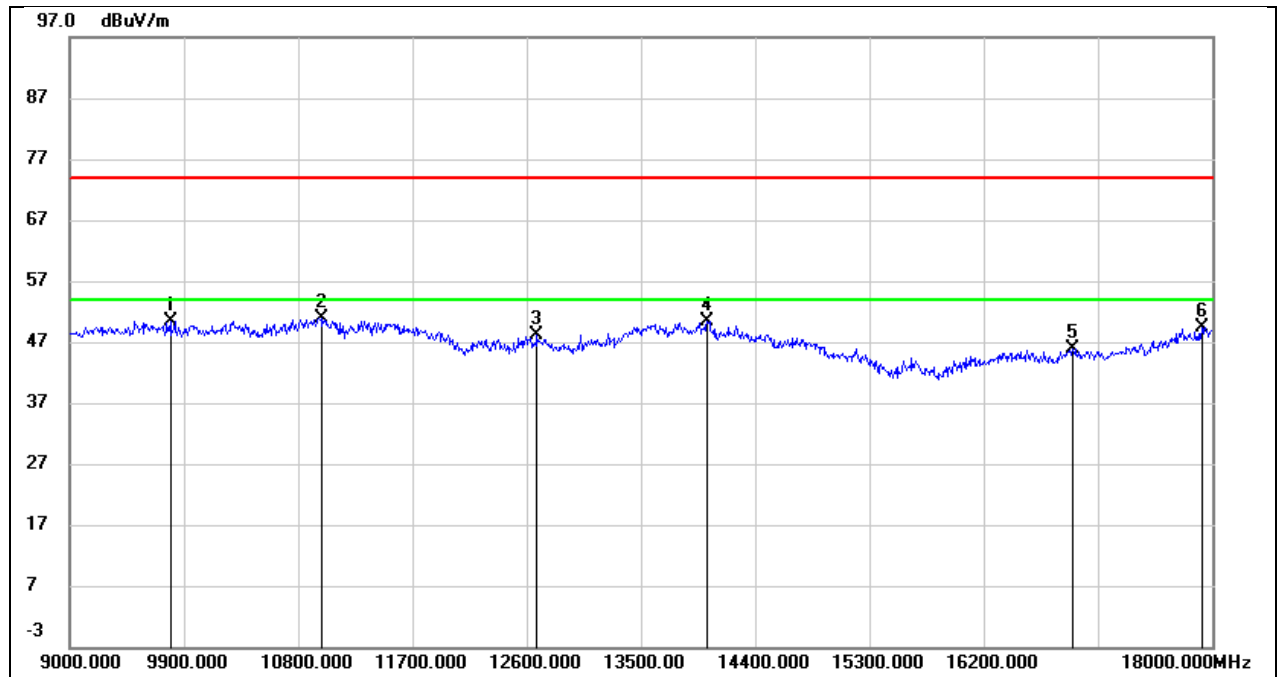


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9792.000	36.48	13.87	50.35	74.00	-23.65	peak
2	10980.000	35.56	15.40	50.96	74.00	-23.04	peak
3	12681.000	29.08	19.10	48.18	74.00	-25.82	peak
4	14022.000	27.26	23.17	50.43	74.00	-23.57	peak
5	16902.000	23.07	22.84	45.91	74.00	-28.09	peak
6	17919.000	20.92	28.42	49.34	74.00	-24.66	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	7015
Polarity:	Vertical	Test Voltage:	DC 5V

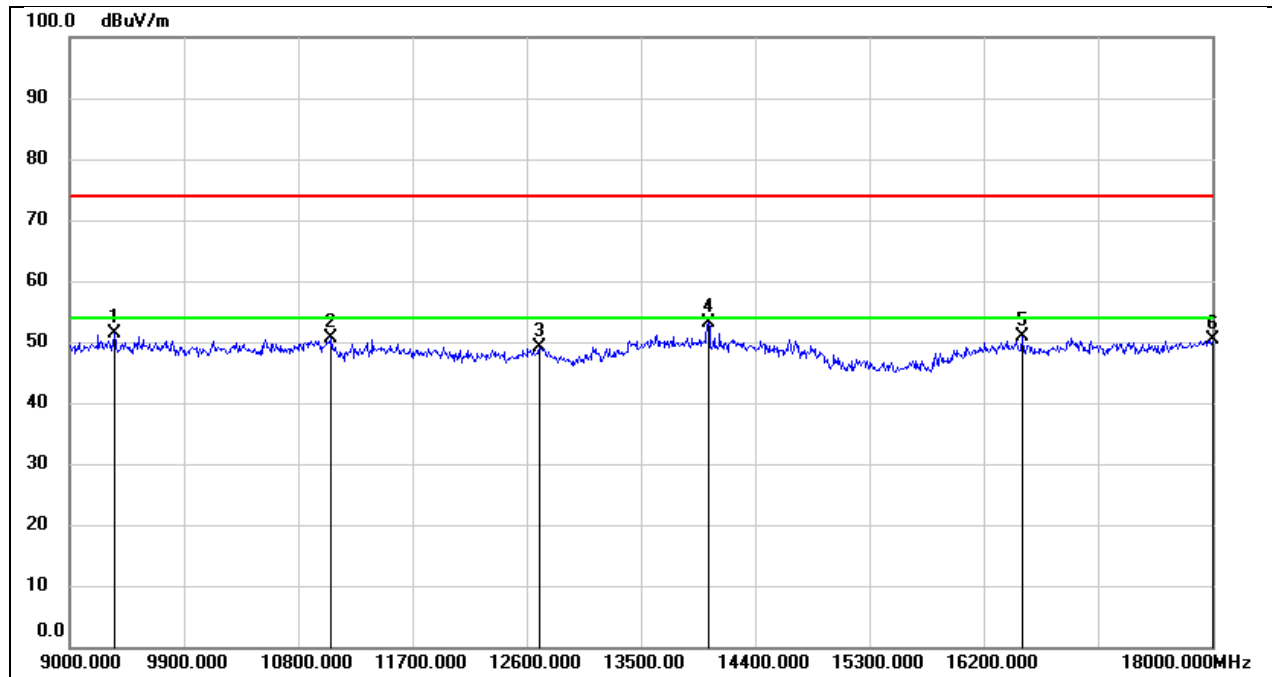


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9351.000	39.25	12.13	51.38	74.00	-22.62	peak
2	11061.000	35.65	14.86	50.51	74.00	-23.49	peak
3	12699.000	30.91	18.13	49.04	74.00	-24.96	peak
4	14031.000	31.52	21.61	53.13	74.00	-20.87	peak
5	16506.000	26.47	24.33	50.80	74.00	-23.20	peak
6	18000.000	23.42	27.00	50.42	74.00	-23.58	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	7115
Polarity:	Horizontal	Test Voltage:	DC 5V

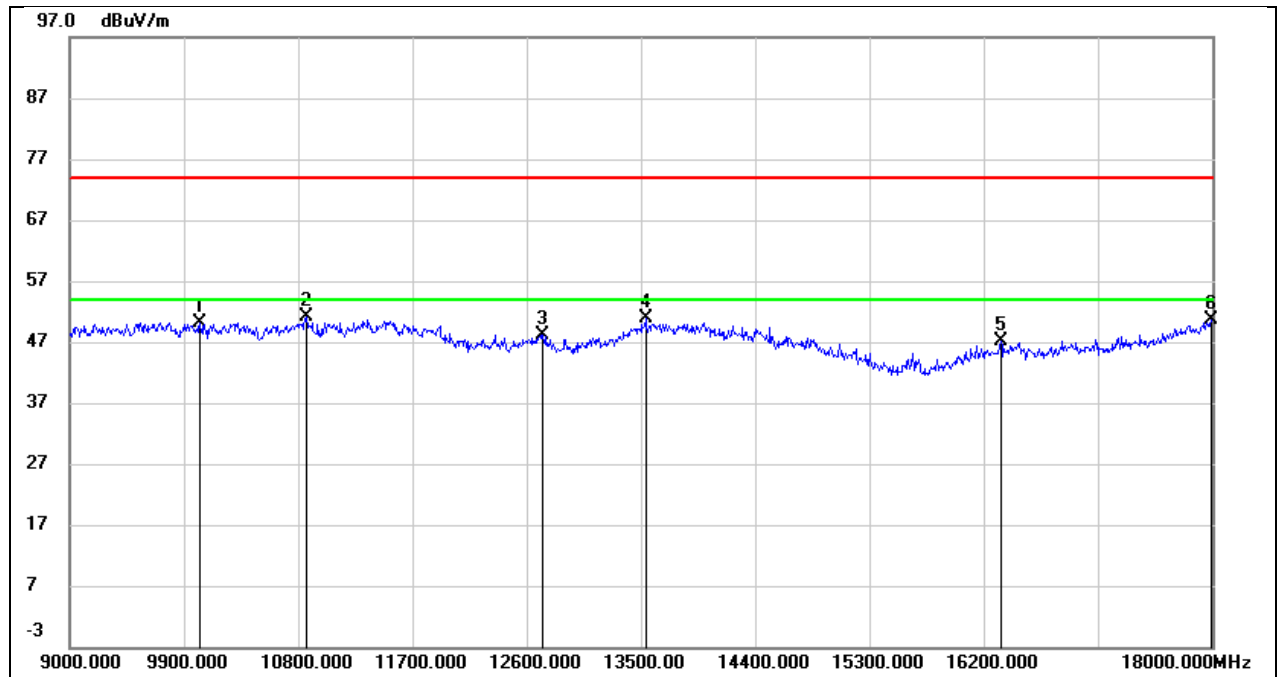


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10026.000	36.37	13.75	50.12	74.00	-23.88	peak
2	10863.000	35.90	15.12	51.02	74.00	-22.98	peak
3	12726.000	28.99	19.23	48.22	74.00	-25.78	peak
4	13536.000	28.65	22.30	50.95	74.00	-23.05	peak
5	16335.000	24.44	22.64	47.08	74.00	-26.92	peak
6	17991.000	21.43	29.11	50.54	74.00	-23.46	peak

Test Mode:	802.11be EHT20	Frequency(MHz):	7115
Polarity:	Vertical	Test Voltage:	DC 5V

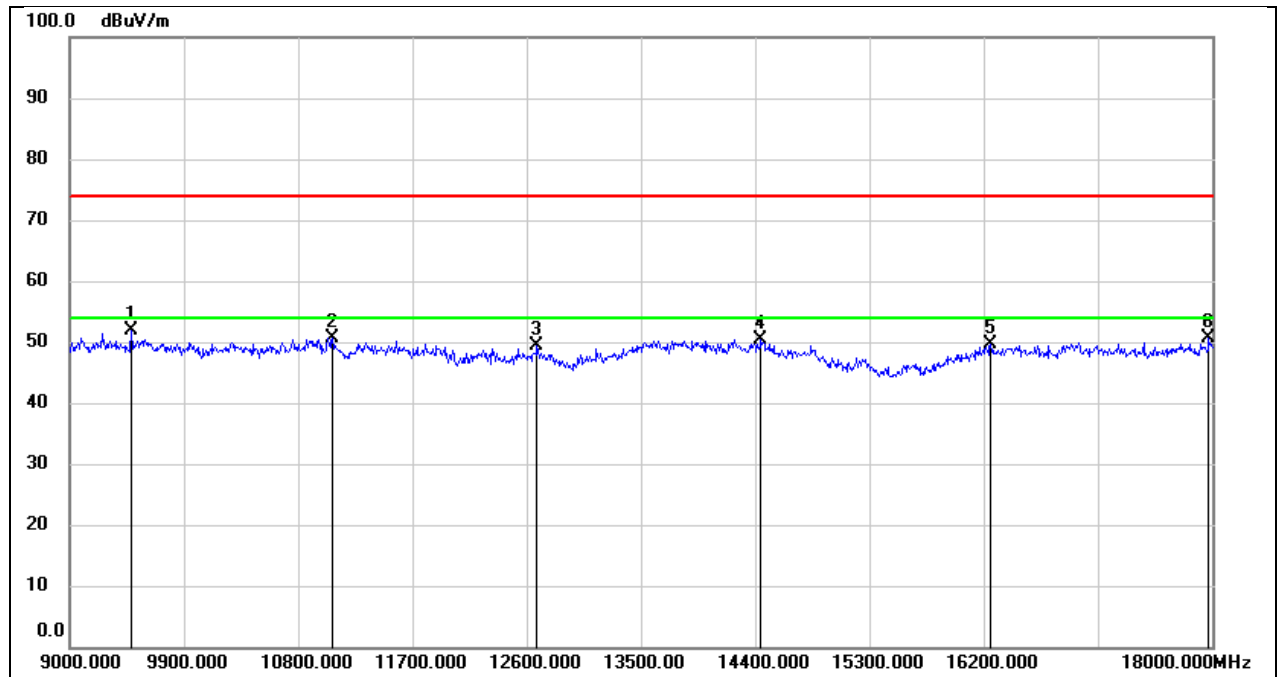


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9486.000	39.17	12.74	51.91	74.00	-22.09	peak
2	11070.000	35.74	14.89	50.63	74.00	-23.37	peak
3	12681.000	31.29	18.09	49.38	74.00	-24.62	peak
4	14445.000	29.44	21.05	50.49	74.00	-23.51	peak
5	16254.000	24.86	24.66	49.52	74.00	-24.48	peak
6	17973.000	23.80	26.86	50.66	74.00	-23.34	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	5965
Polarity:	Horizontal	Test Voltage:	DC 5V

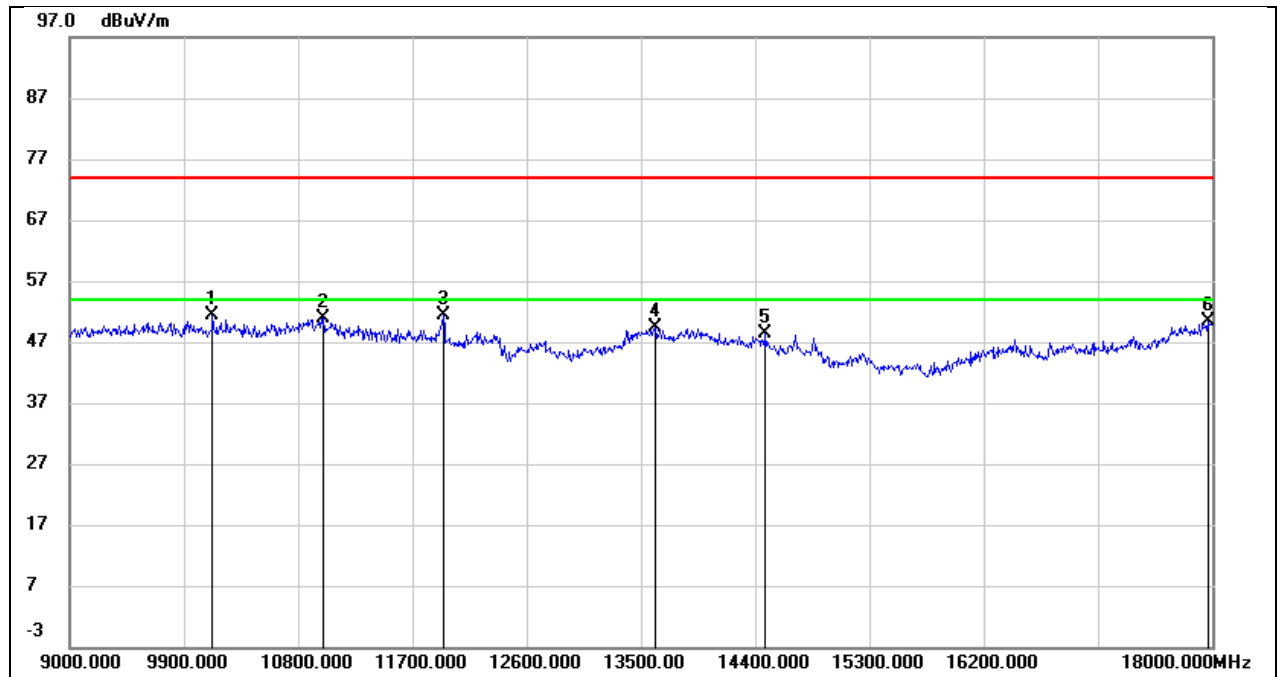


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10125.000	37.65	13.69	51.34	74.00	-22.66	peak
2	10998.000	35.52	15.45	50.97	74.00	-23.03	peak
3	11943.000	32.70	18.72	51.42	74.00	-22.58	peak
4	13617.000	26.89	22.44	49.33	74.00	-24.67	peak
5	14481.000	27.15	21.35	48.50	74.00	-25.50	peak
6	17964.000	21.44	28.86	50.30	74.00	-23.70	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	5965
Polarity:	Vertical	Test Voltage:	DC 5V

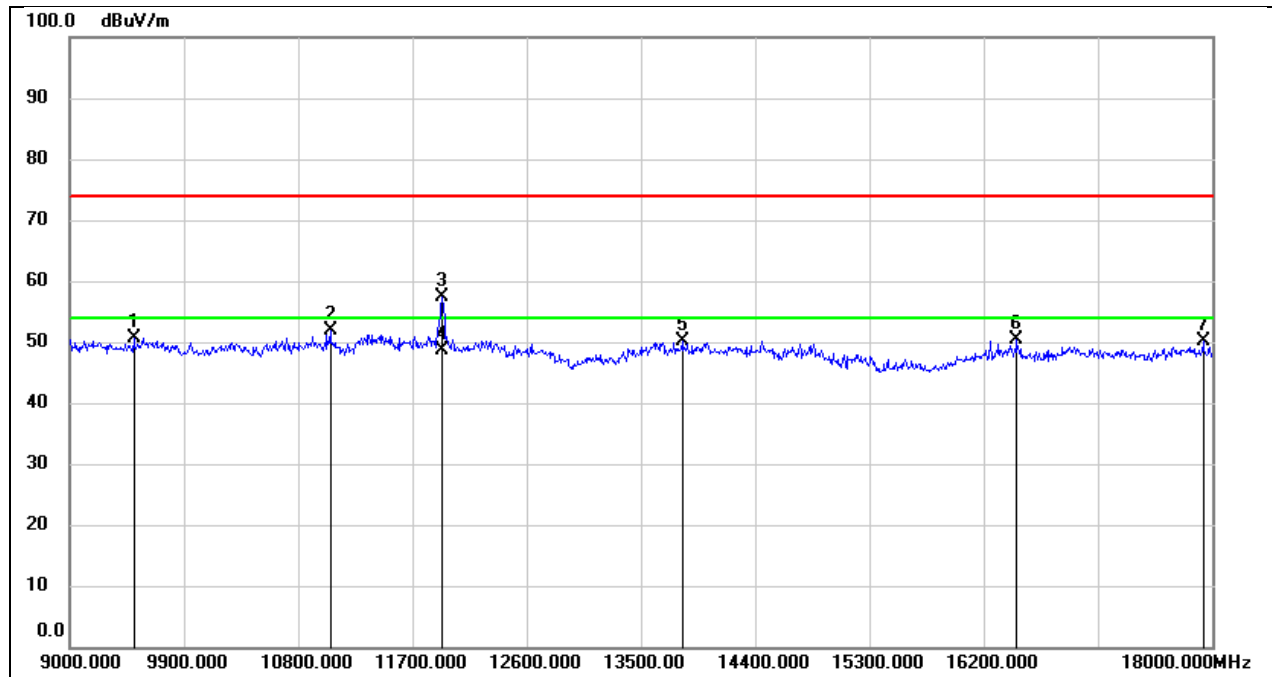


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9504.000	37.89	12.84	50.73	74.00	-23.27	peak
2	11052.000	37.05	14.82	51.87	74.00	-22.13	peak
3	11934.000	39.79	17.55	57.34	74.00	-16.66	peak
4	11934.000	31.07	17.55	48.62	54.00	-5.38	AVG
5	13824.000	28.93	21.16	50.09	74.00	-23.91	peak
6	16461.000	25.87	24.40	50.27	74.00	-23.73	peak
7	17928.000	23.45	26.63	50.08	74.00	-23.92	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6165
Polarity:	Horizontal	Test Voltage:	DC 5V

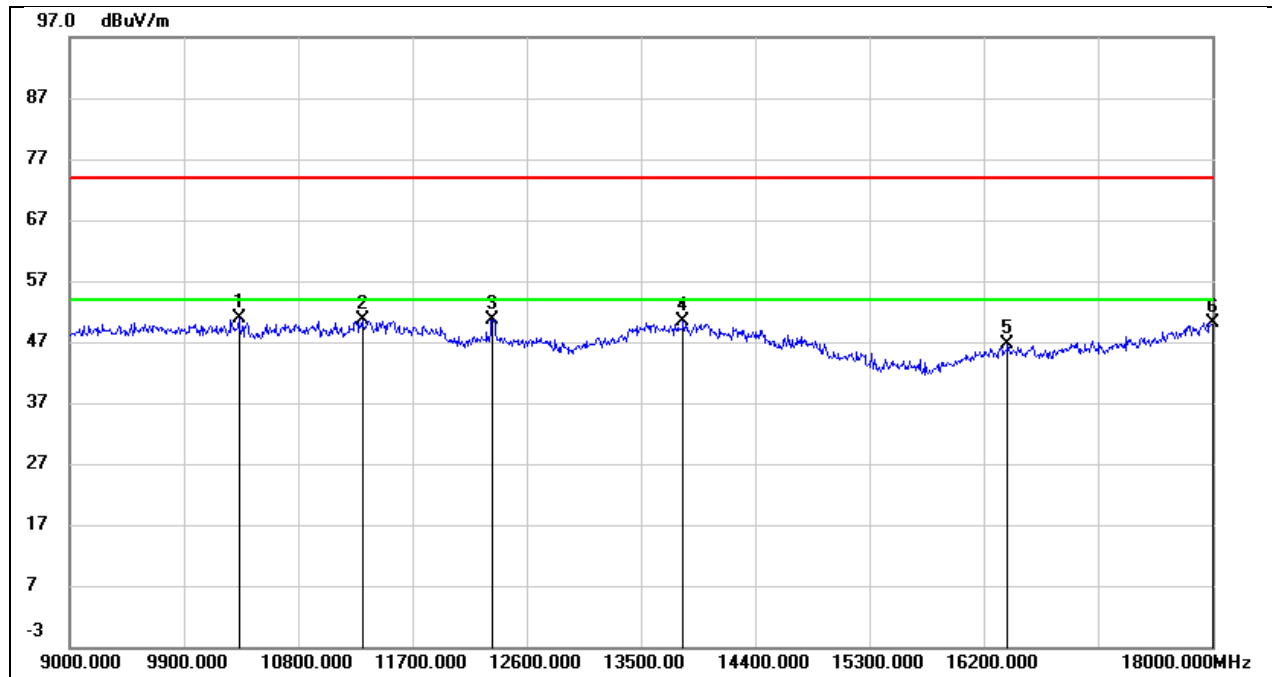


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10332.000	37.07	13.80	50.87	74.00	-23.13	peak
2	11304.000	33.58	16.96	50.54	74.00	-23.46	peak
3	12330.000	31.88	18.83	50.71	74.00	-23.29	peak
4	13833.000	27.63	22.82	50.45	74.00	-23.55	peak
5	16389.000	24.08	22.64	46.72	74.00	-27.28	peak
6	18000.000	21.04	29.20	50.24	74.00	-23.76	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6165
Polarity:	Vertical	Test Voltage:	DC 5V

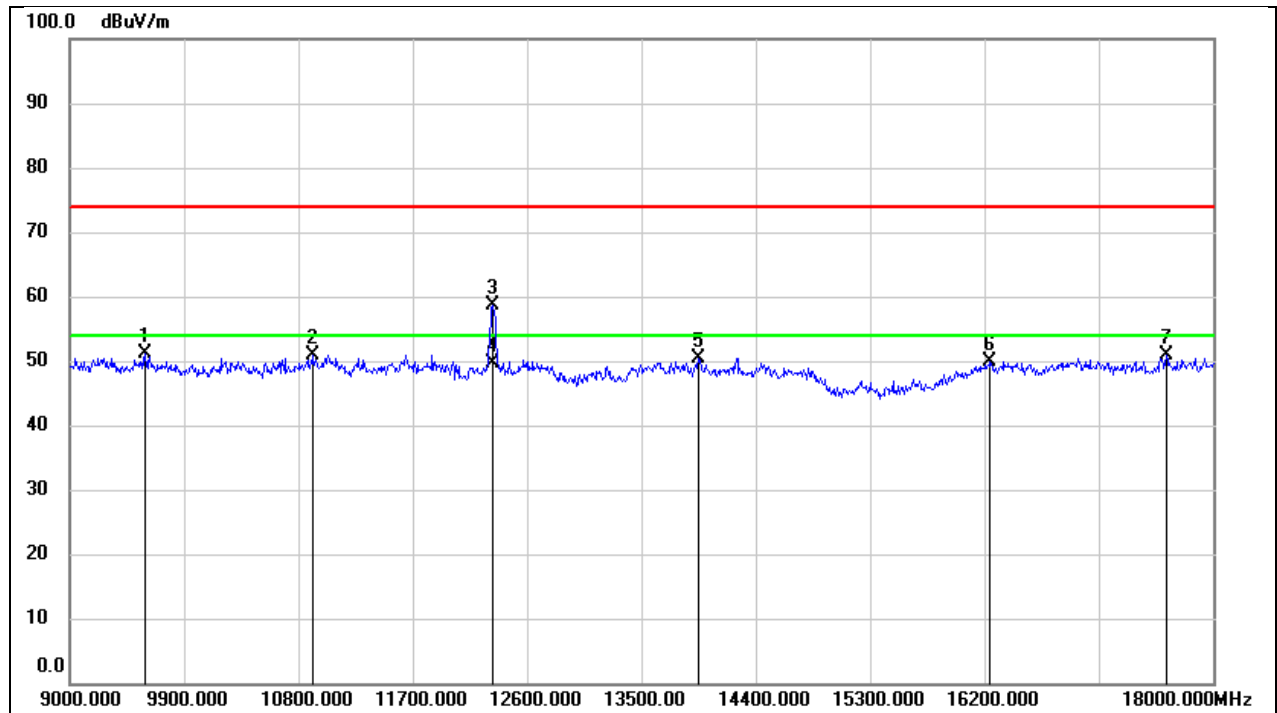


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9594.000	38.02	13.21	51.23	74.00	-22.77	peak
2	10917.000	36.36	14.56	50.92	74.00	-23.08	peak
3	12330.000	40.71	17.87	58.58	74.00	-15.42	peak
4	12330.000	31.87	17.87	49.74	54.00	-4.26	AVG
5	13950.000	28.97	21.50	50.47	74.00	-23.53	peak
6	16245.000	25.15	24.69	49.84	74.00	-24.16	peak
7	17631.000	25.48	25.32	50.80	74.00	-23.20	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6405
Polarity:	Horizontal	Test Voltage:	DC 5V

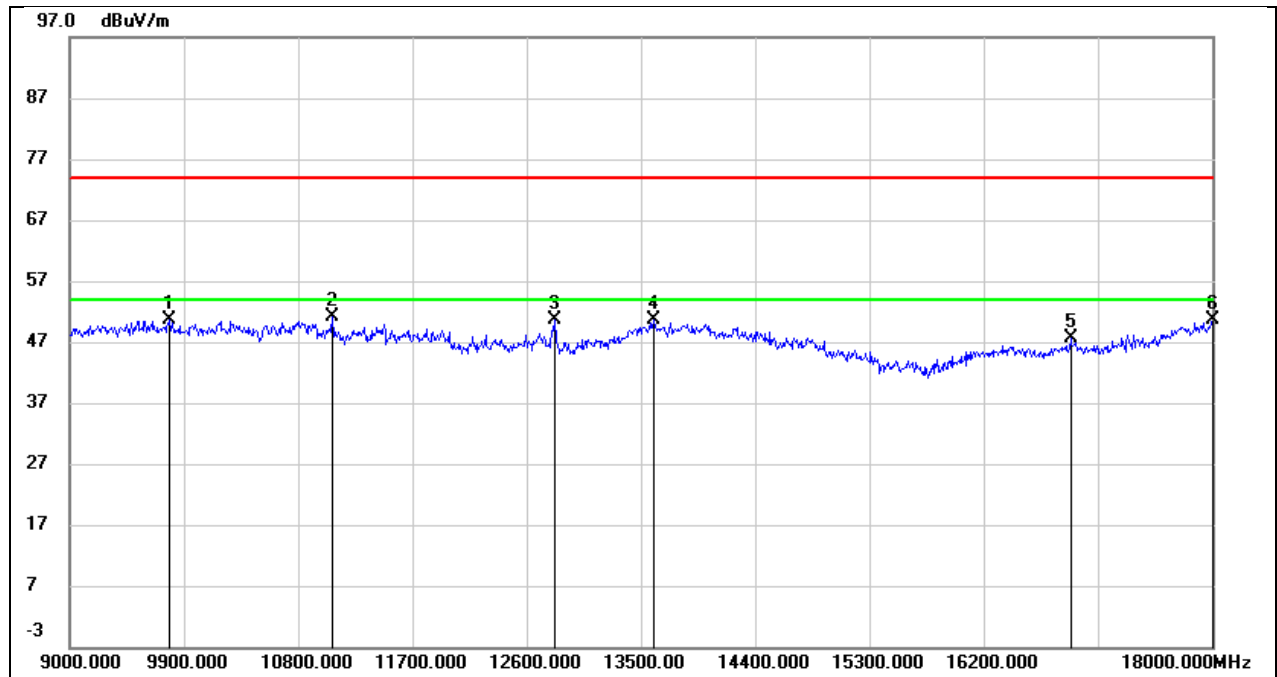


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9783.000	36.70	13.85	50.55	74.00	-23.45	peak
2	11070.000	35.24	15.78	51.02	74.00	-22.98	peak
3	12816.000	31.30	19.45	50.75	74.00	-23.25	peak
4	13599.000	28.10	22.42	50.52	74.00	-23.48	peak
5	16884.000	24.83	22.80	47.63	74.00	-26.37	peak
6	18000.000	21.39	29.20	50.59	74.00	-23.41	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6405
Polarity:	Vertical	Test Voltage:	DC 5V

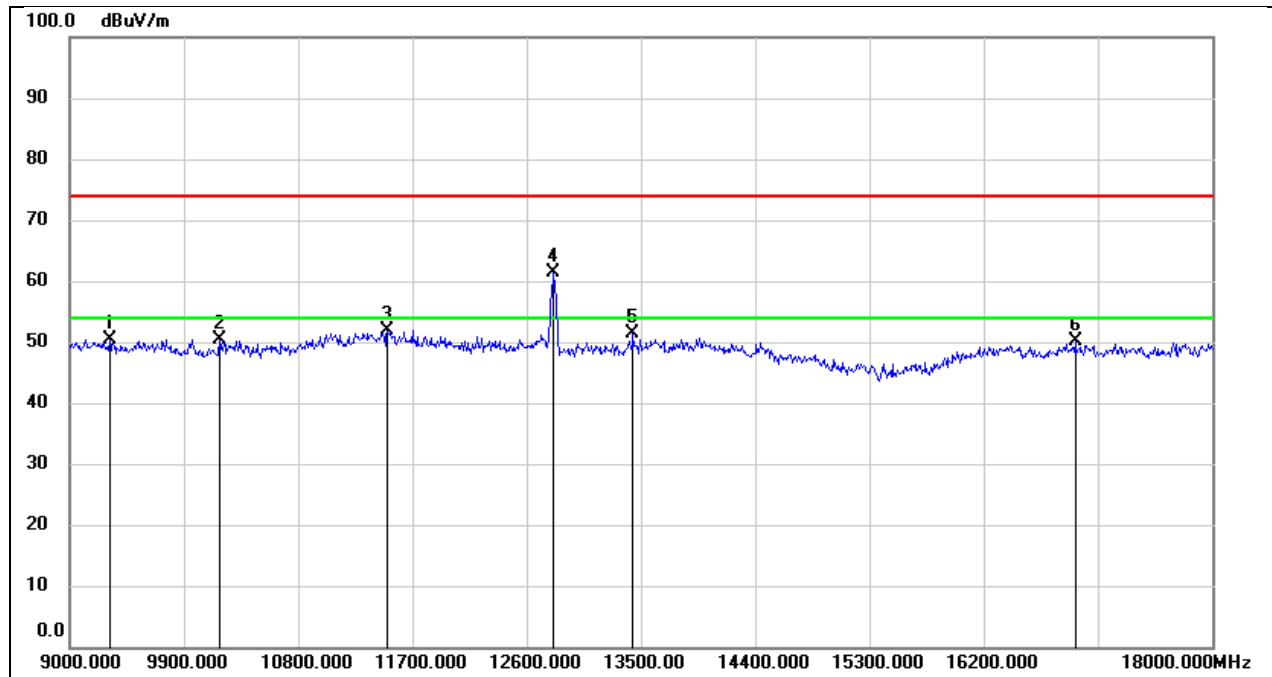


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9315.000	38.31	12.02	50.33	74.00	-23.67	peak
2	10179.000	37.33	13.14	50.47	74.00	-23.53	peak
3	11502.000	35.20	16.61	51.81	74.00	-22.19	peak
4*	12807.000	43.12	18.35	61.47	68.20	-6.73	peak
5	13437.000	30.93	20.34	51.27	74.00	-22.73	peak
6	16920.000	25.46	24.59	50.05	74.00	-23.95	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6445
Polarity:	Horizontal	Test Voltage:	DC 5V

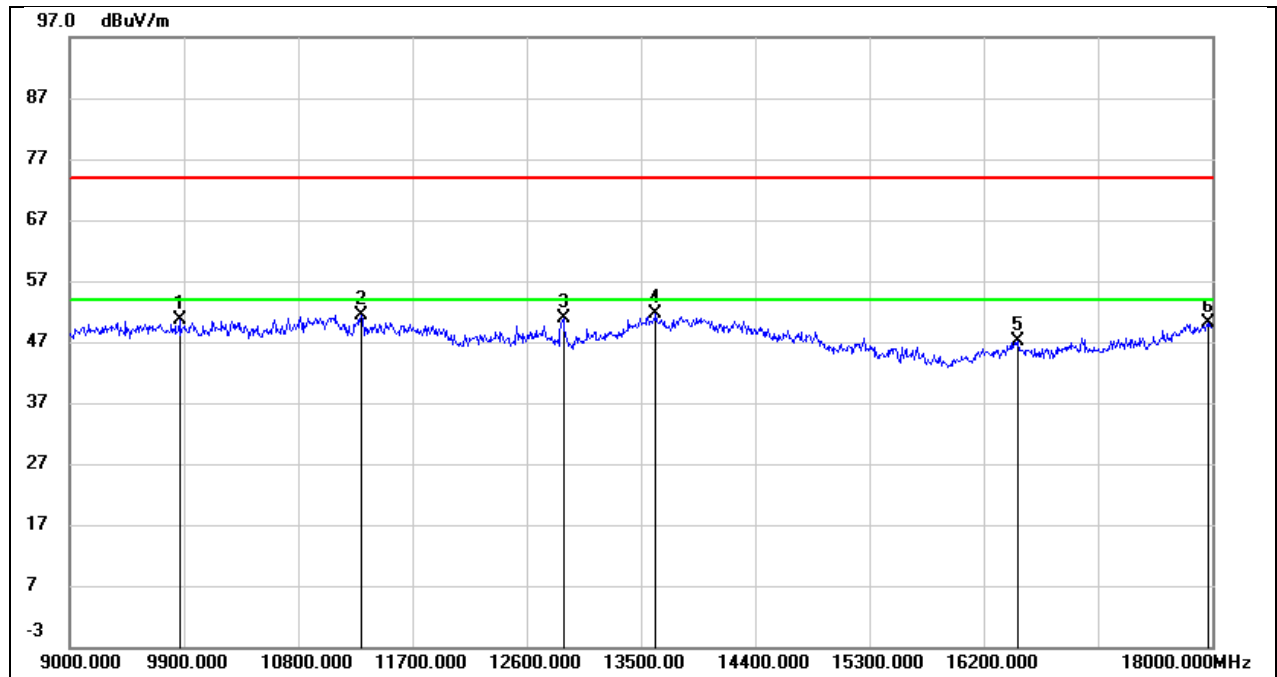


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9864.000	36.70	13.84	50.54	74.00	-23.46	peak
2	11295.000	34.52	16.92	51.44	74.00	-22.56	peak
3	12888.000	31.23	19.61	50.84	74.00	-23.16	peak
4	13617.000	29.20	22.44	51.64	74.00	-22.36	peak
5	16470.000	24.39	22.64	47.03	74.00	-26.97	peak
6	17964.000	21.21	28.86	50.07	74.00	-23.93	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6445
Polarity:	Vertical	Test Voltage:	DC 5V

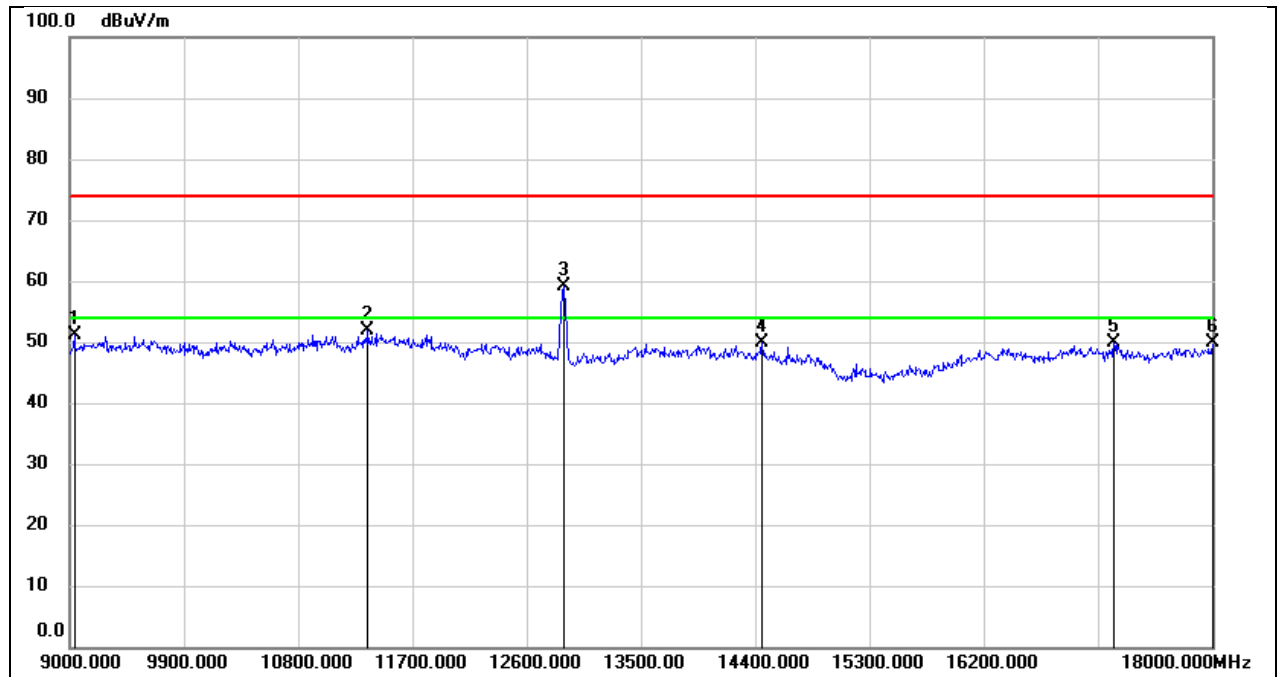


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9036.000	39.73	11.28	51.01	74.00	-22.99	peak
2	11349.000	35.86	15.91	51.77	74.00	-22.23	peak
3*	12888.000	40.72	18.48	59.20	68.20	-9.00	peak
4	14454.000	28.83	21.05	49.88	74.00	-24.12	peak
5	17226.000	25.17	24.82	49.99	74.00	-24.01	peak
6	18000.000	22.76	27.00	49.76	74.00	-24.24	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6485
Polarity:	Horizontal	Test Voltage:	DC 5V

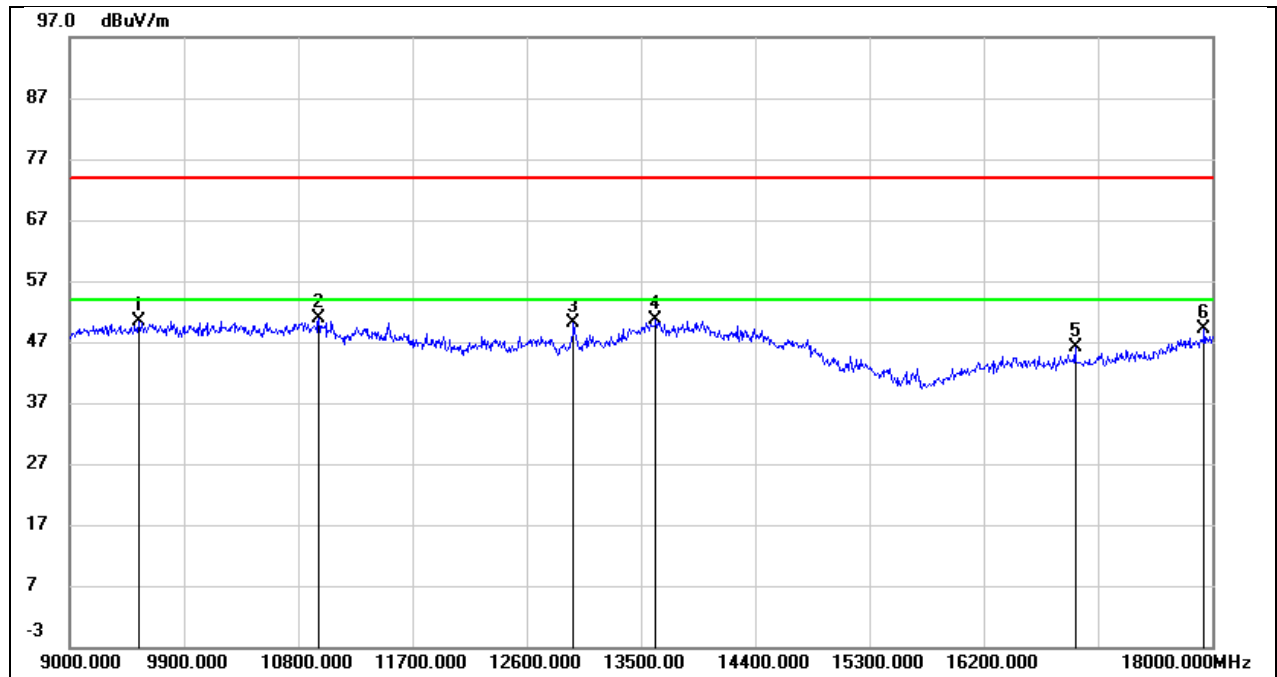


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9540.000	37.35	13.04	50.39	74.00	-23.61	peak
2	10962.000	35.54	15.36	50.90	74.00	-23.10	peak
3	12969.000	30.40	19.79	50.19	74.00	-23.81	peak
4	13617.000	28.09	22.44	50.53	74.00	-23.47	peak
5	16920.000	23.15	22.89	46.04	74.00	-27.96	peak
6	17937.000	20.57	28.60	49.17	74.00	-24.83	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6485
Polarity:	Vertical	Test Voltage:	DC 5V

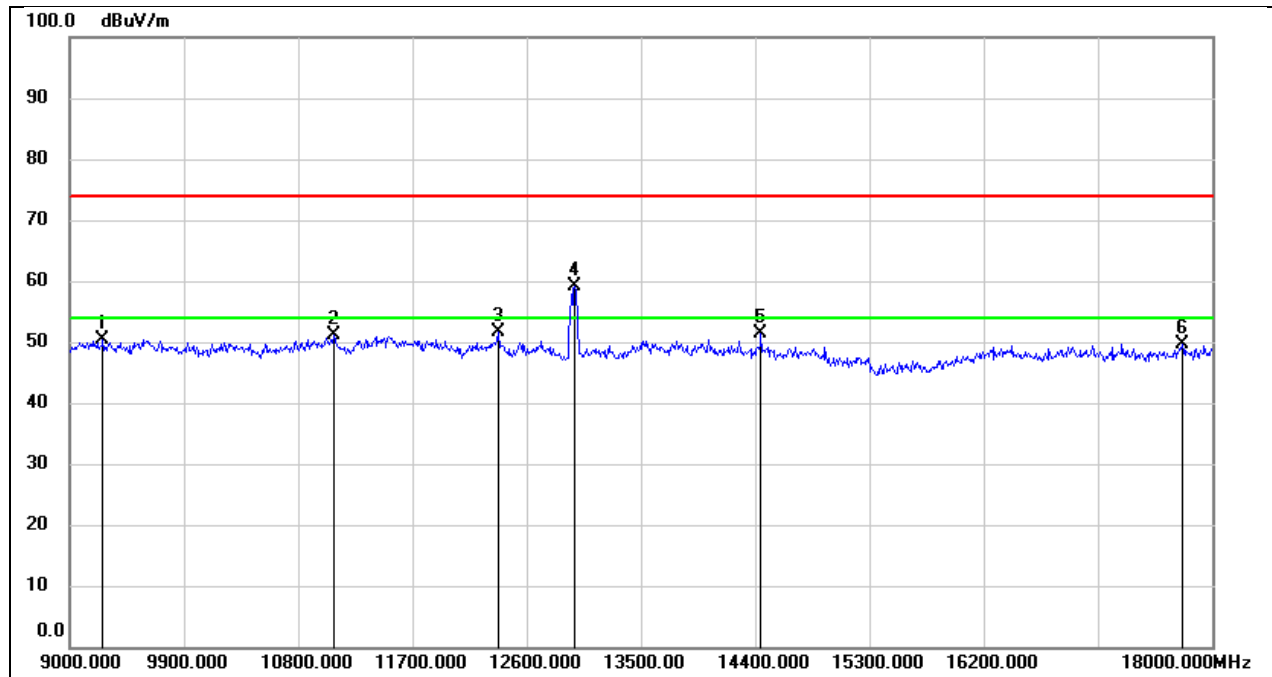


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9261.000	38.58	11.86	50.44	74.00	-23.56	peak
2	11079.000	36.33	14.92	51.25	74.00	-22.75	peak
3	12375.000	33.68	17.92	51.60	74.00	-22.40	peak
4*	12978.000	40.39	18.63	59.02	68.20	-9.18	peak
5	14445.000	30.29	21.05	51.34	74.00	-22.66	peak
6	17766.000	23.71	25.85	49.56	74.00	-24.44	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6525
Polarity:	Horizontal	Test Voltage:	DC 5V

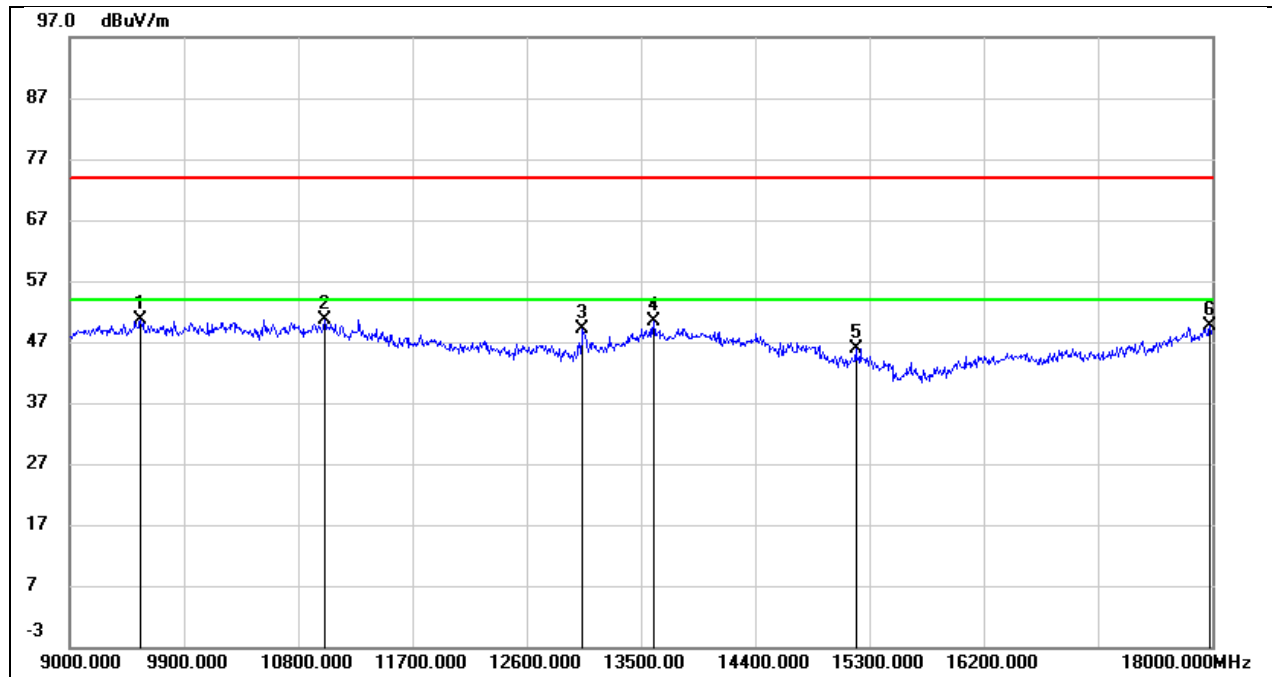


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9558.000	37.49	13.15	50.64	74.00	-23.36	peak
2	11007.000	35.21	15.49	50.70	74.00	-23.30	peak
3	13041.000	29.07	20.07	49.14	74.00	-24.86	peak
4	13599.000	27.89	22.42	50.31	74.00	-23.69	peak
5	15192.000	26.92	18.91	45.83	74.00	-28.17	peak
6	17982.000	20.59	29.03	49.62	74.00	-24.38	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6525
Polarity:	Vertical	Test Voltage:	DC 5V

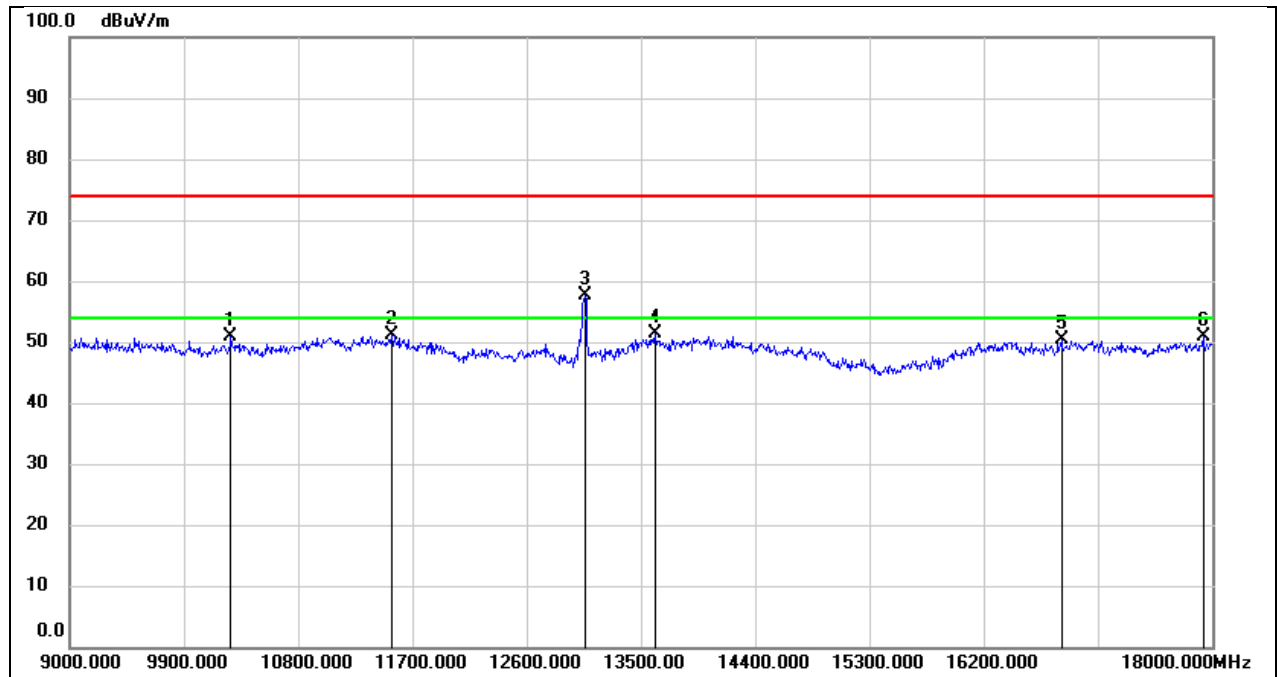


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10269.000	37.48	13.29	50.77	74.00	-23.23	peak
2	11538.000	34.26	16.80	51.06	74.00	-22.94	peak
3*	13059.000	38.62	18.90	57.52	68.20	-10.68	peak
4	13608.000	30.53	20.75	51.28	74.00	-22.72	peak
5	16812.000	25.95	24.32	50.27	74.00	-23.73	peak
6	17928.000	24.23	26.63	50.86	74.00	-23.14	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6565
Polarity:	Horizontal	Test Voltage:	DC 5V

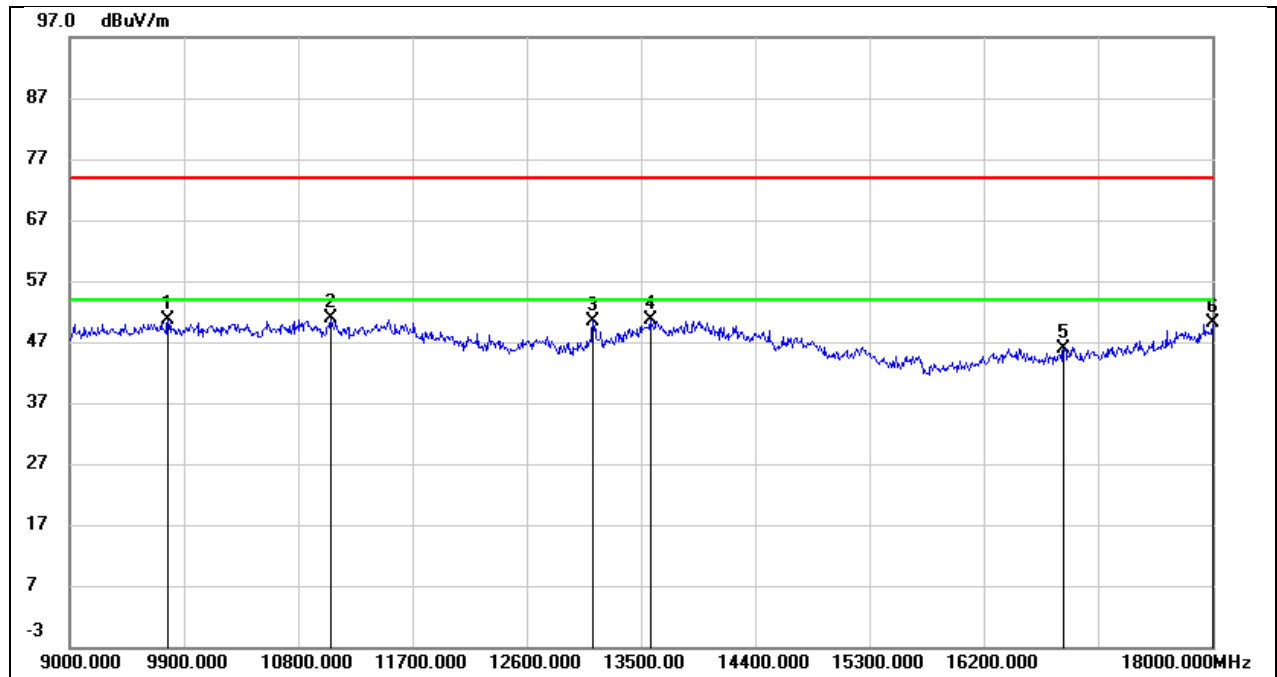


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9774.000	36.72	13.82	50.54	74.00	-23.46	peak
2	11052.000	35.24	15.69	50.93	74.00	-23.07	peak
3	13122.000	30.02	20.48	50.50	74.00	-23.50	peak
4	13572.000	28.29	22.37	50.66	74.00	-23.34	peak
5	16830.000	23.22	22.67	45.89	74.00	-28.11	peak
6	18000.000	20.83	29.20	50.03	74.00	-23.97	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6565
Polarity:	Vertical	Test Voltage:	DC 5V

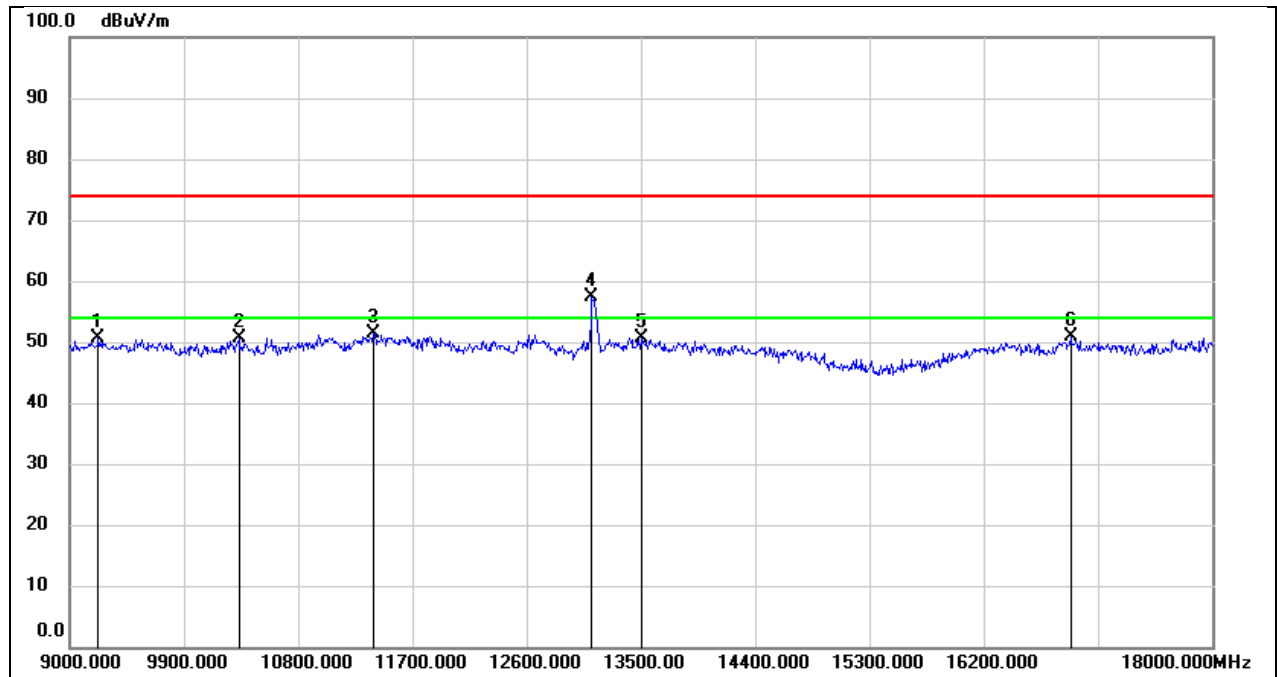


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9225.000	38.78	11.75	50.53	74.00	-23.47	peak
2	10332.000	37.20	13.43	50.63	74.00	-23.37	peak
3	11394.000	35.40	16.09	51.49	74.00	-22.51	peak
4*	13113.000	38.31	19.13	57.44	68.20	-10.76	peak
5	13500.000	30.16	20.54	50.70	74.00	-23.30	peak
6	16884.000	26.31	24.50	50.81	74.00	-23.19	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6725
Polarity:	Horizontal	Test Voltage:	DC 5V

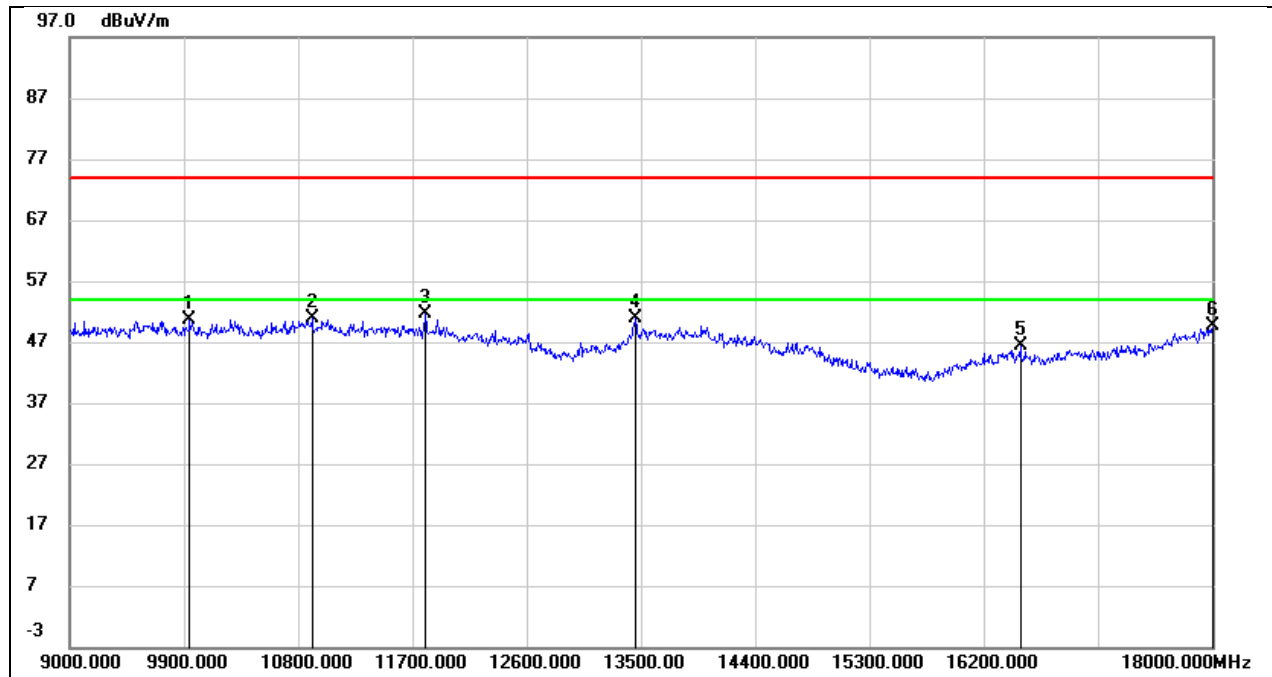


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9945.000	36.92	13.80	50.72	74.00	-23.28	peak
2	10908.000	35.60	15.23	50.83	74.00	-23.17	peak
3	11799.000	32.97	18.54	51.51	74.00	-22.49	peak
4	13455.000	28.79	22.06	50.85	74.00	-23.15	peak
5	16488.000	23.77	22.64	46.41	74.00	-27.59	peak
6	18000.000	20.33	29.20	49.53	74.00	-24.47	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6725
Polarity:	Vertical	Test Voltage:	DC 5V

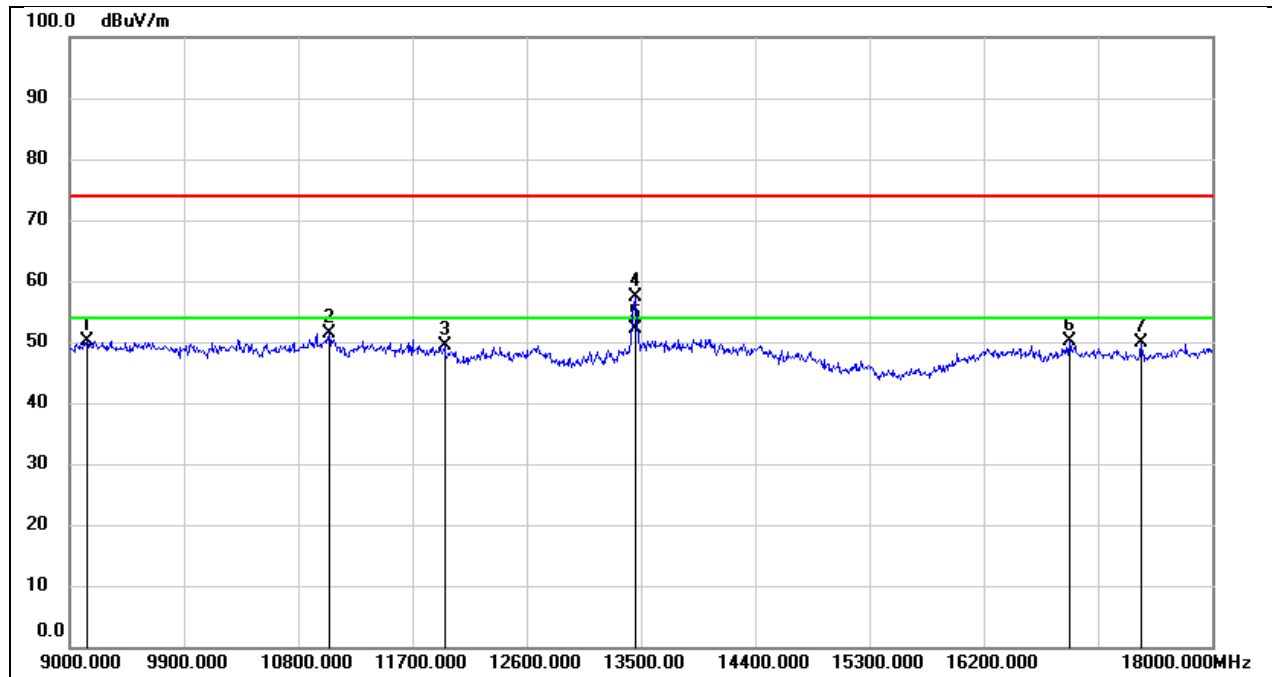


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9135.000	38.59	11.53	50.12	74.00	-23.88	peak
2	11043.000	36.68	14.79	51.47	74.00	-22.53	peak
3	11952.000	31.84	17.60	49.44	74.00	-24.56	peak
4	13455.000	36.86	20.41	57.27	74.00	-16.73	peak
5	13455.000	31.63	20.41	52.04	54.00	-1.96	AVG
6	16875.000	25.71	24.47	50.18	74.00	-23.82	peak
7	17442.000	25.09	24.86	49.95	74.00	-24.05	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6845
Polarity:	Horizontal	Test Voltage:	DC 5V

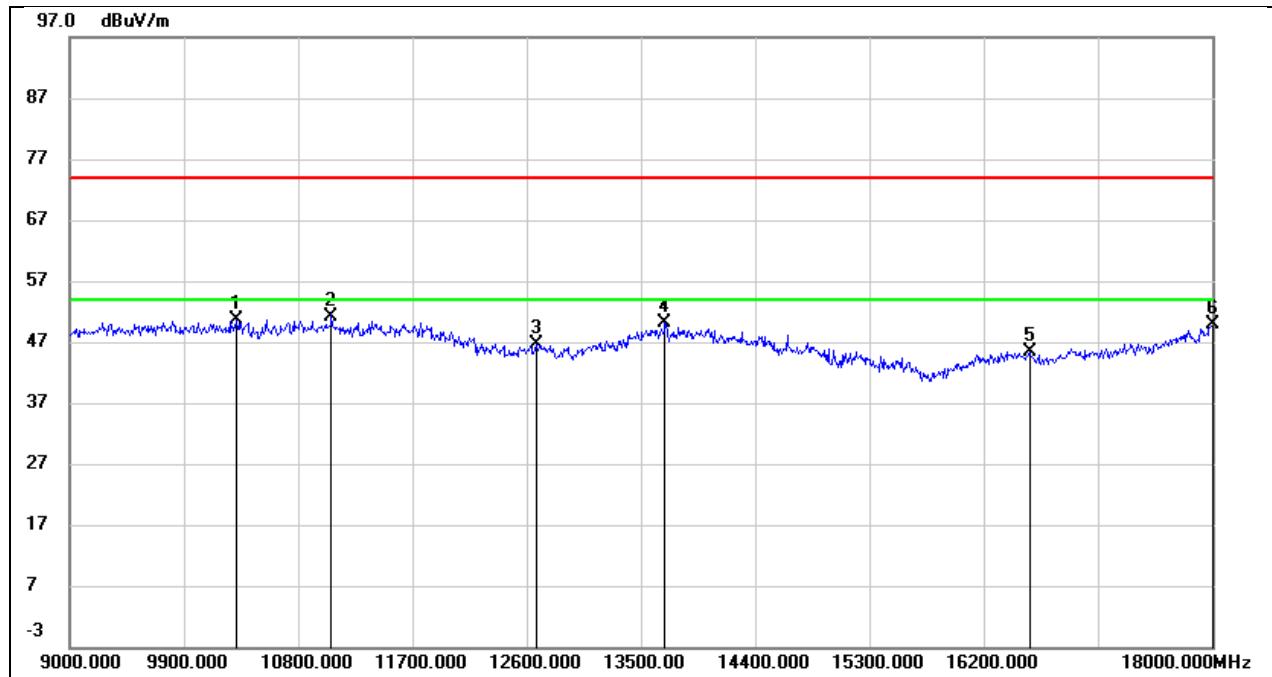


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10314.000	36.93	13.78	50.71	74.00	-23.29	peak
2	11061.000	35.51	15.74	51.25	74.00	-22.75	peak
3	12681.000	27.60	19.10	46.70	74.00	-27.30	peak
4	13689.000	27.51	22.56	50.07	74.00	-23.93	peak
5	16560.000	22.79	22.54	45.33	74.00	-28.67	peak
6	18000.000	20.68	29.20	49.88	74.00	-24.12	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6845
Polarity:	Vertical	Test Voltage:	DC 5V

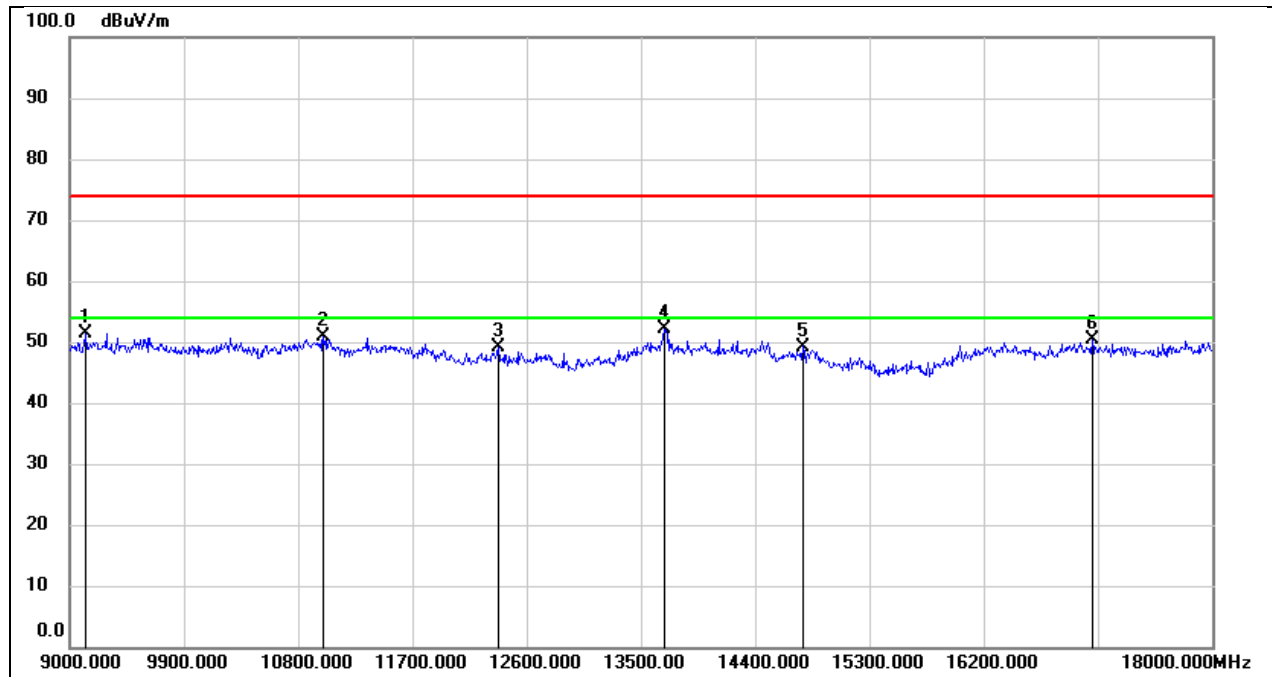


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9126.000	39.88	11.49	51.37	74.00	-22.63	peak
2	10998.000	36.17	14.65	50.82	74.00	-23.18	peak
3	12375.000	31.13	17.92	49.05	74.00	-24.95	peak
4	13680.000	31.30	20.89	52.19	74.00	-21.81	peak
5	14778.000	28.94	20.31	49.25	74.00	-24.75	peak
6	17055.000	25.53	24.79	50.32	74.00	-23.68	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6885
Polarity:	Horizontal	Test Voltage:	DC 5V

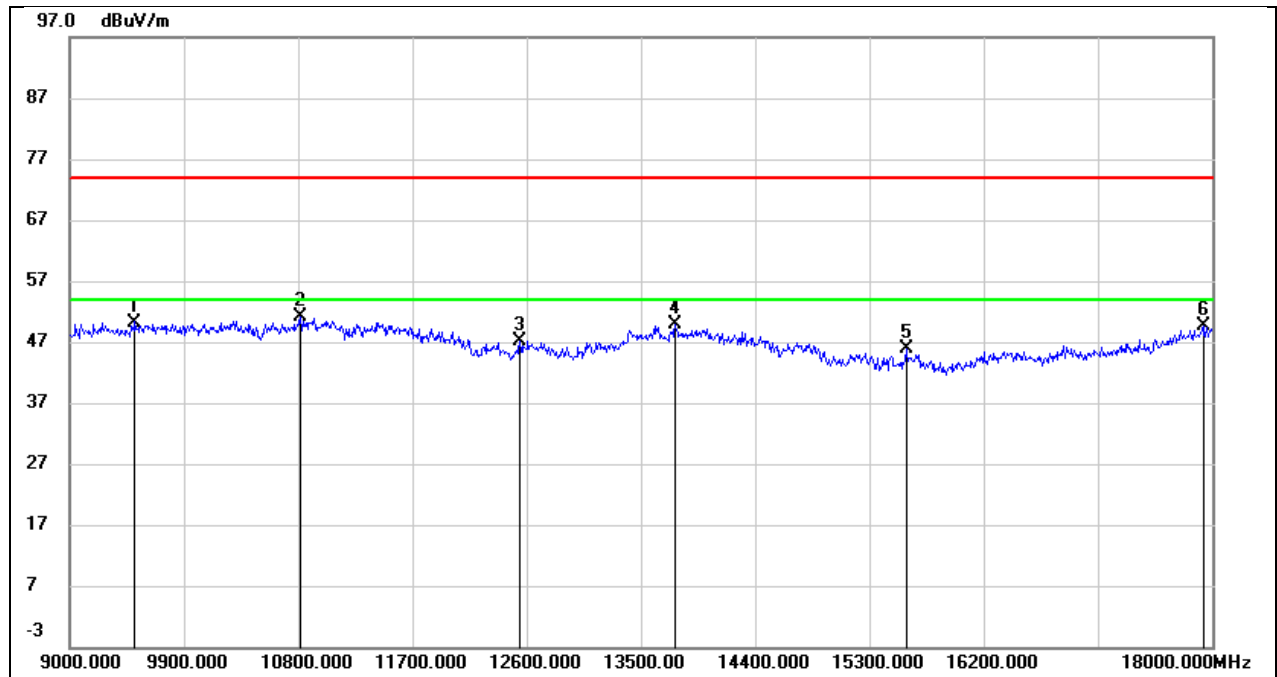


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9513.000	37.36	12.89	50.25	74.00	-23.75	peak
2	10818.000	36.07	15.02	51.09	74.00	-22.91	peak
3	12546.000	28.31	18.83	47.14	74.00	-26.86	peak
4	13770.000	27.18	22.69	49.87	74.00	-24.13	peak
5	15588.000	26.70	19.08	45.78	74.00	-28.22	peak
6	17928.000	21.15	28.51	49.66	74.00	-24.34	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	6885
Polarity:	Vertical	Test Voltage:	DC 5V

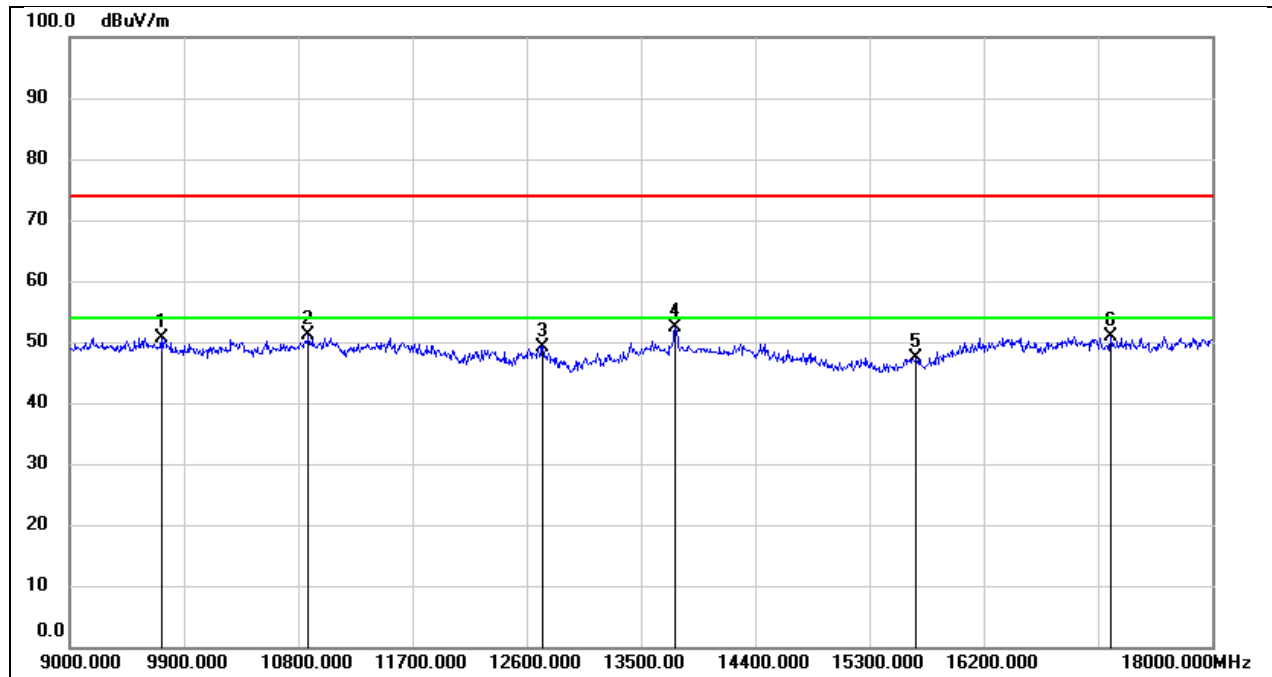


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9720.000	37.24	13.38	50.62	74.00	-23.38	peak
2	10881.000	36.64	14.51	51.15	74.00	-22.85	peak
3	12726.000	31.06	18.19	49.25	74.00	-24.75	peak
4	13770.000	31.46	21.04	52.50	74.00	-21.50	peak
5	15669.000	26.44	21.00	47.44	74.00	-26.56	peak
6	17199.000	26.04	24.82	50.86	74.00	-23.14	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	7005
Polarity:	Horizontal	Test Voltage:	DC 5V

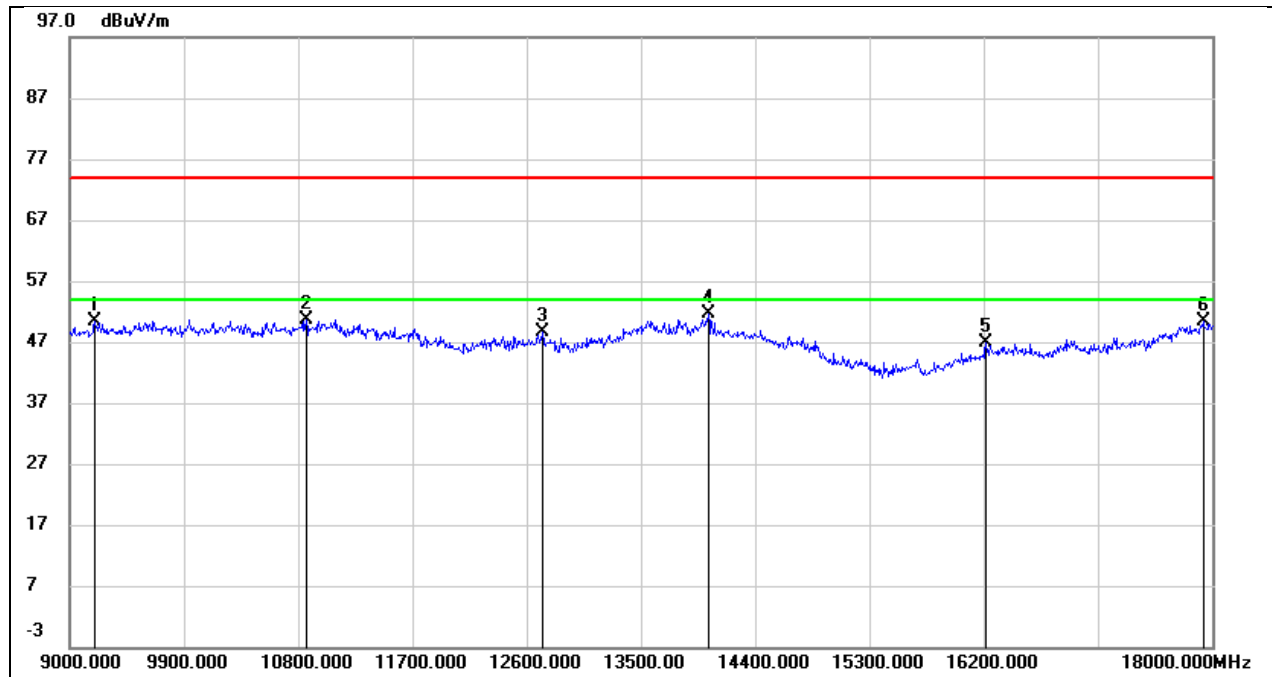


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9198.000	38.88	11.44	50.32	74.00	-23.68	peak
2	10863.000	35.57	15.12	50.69	74.00	-23.31	peak
3	12726.000	29.34	19.23	48.57	74.00	-25.43	peak
4	14031.000	28.57	23.13	51.70	74.00	-22.30	peak
5	16218.000	24.26	22.62	46.88	74.00	-27.12	peak
6	17928.000	21.82	28.51	50.33	74.00	-23.67	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	7005
Polarity:	Vertical	Test Voltage:	DC 5V

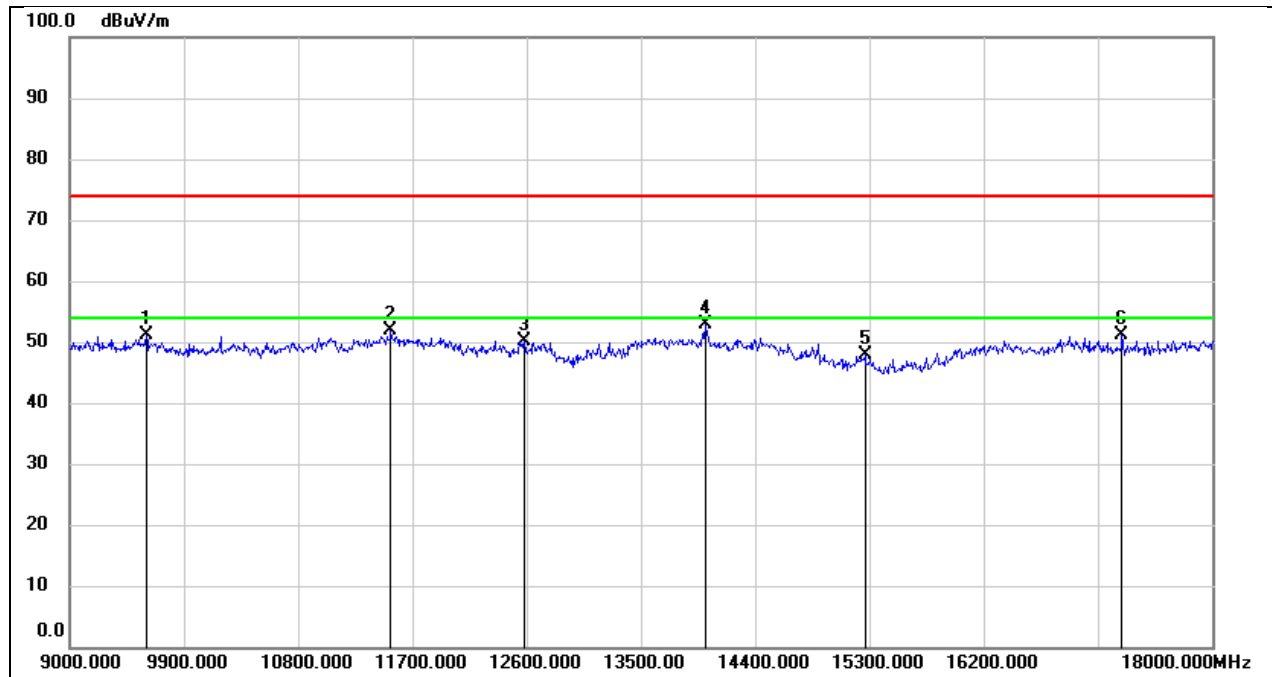


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9603.000	37.77	13.24	51.01	74.00	-22.99	peak
2	11529.000	35.19	16.76	51.95	74.00	-22.05	peak
3	12582.000	32.17	17.92	50.09	74.00	-23.91	peak
4	14004.000	31.34	21.64	52.98	74.00	-21.02	peak
5	15264.000	27.95	20.04	47.99	74.00	-26.01	peak
6	17289.000	26.22	24.82	51.04	74.00	-22.96	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	7085
Polarity:	Horizontal	Test Voltage:	DC 5V

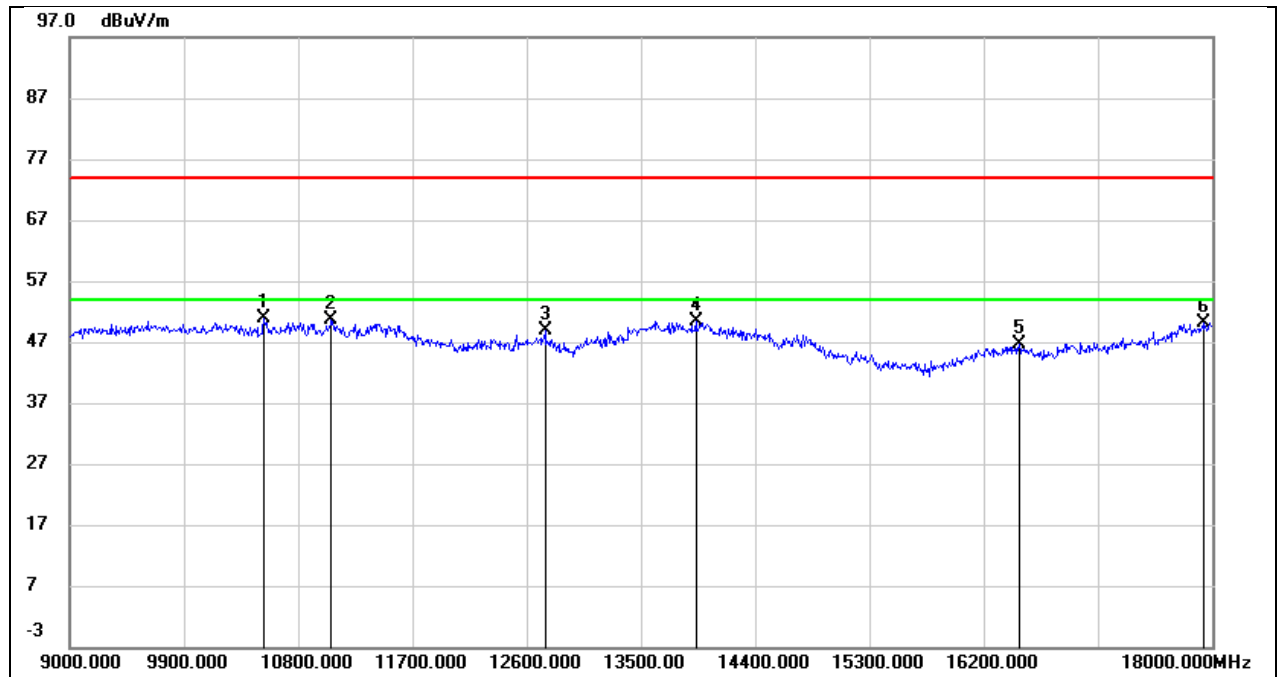


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10530.000	36.60	14.24	50.84	74.00	-23.16	peak
2	11061.000	34.97	15.74	50.71	74.00	-23.29	peak
3	12744.000	29.60	19.27	48.87	74.00	-25.13	peak
4	13932.000	27.36	23.07	50.43	74.00	-23.57	peak
5	16479.000	24.00	22.65	46.65	74.00	-27.35	peak
6	17928.000	21.70	28.51	50.21	74.00	-23.79	peak

Test Mode:	802.11be EHT40	Frequency(MHz):	7085
Polarity:	Vertical	Test Voltage:	DC 5V

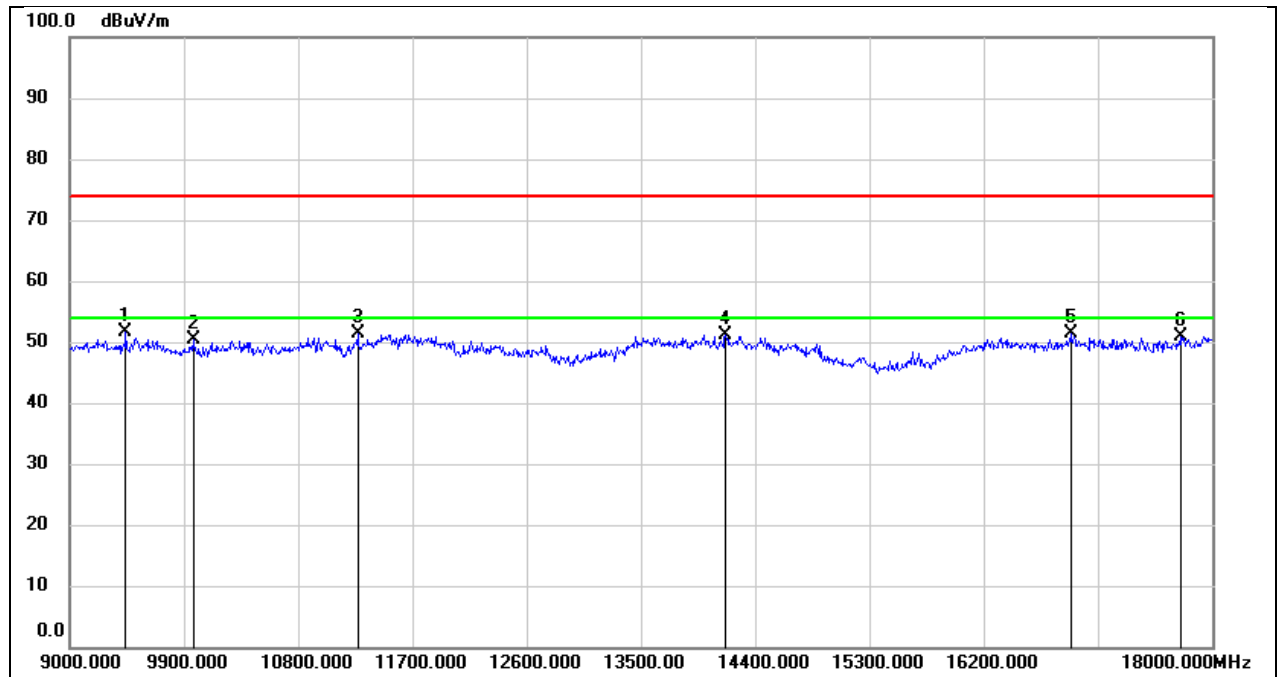


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9441.000	39.11	12.49	51.60	74.00	-22.40	peak
2	9972.000	37.26	13.11	50.37	74.00	-23.63	peak
3	11268.000	35.86	15.59	51.45	74.00	-22.55	peak
4	14166.000	29.73	21.49	51.22	74.00	-22.78	peak
5	16893.000	26.78	24.52	51.30	74.00	-22.70	peak
6	17748.000	25.21	25.78	50.99	74.00	-23.01	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	5985
Polarity:	Horizontal	Test Voltage:	DC 5V

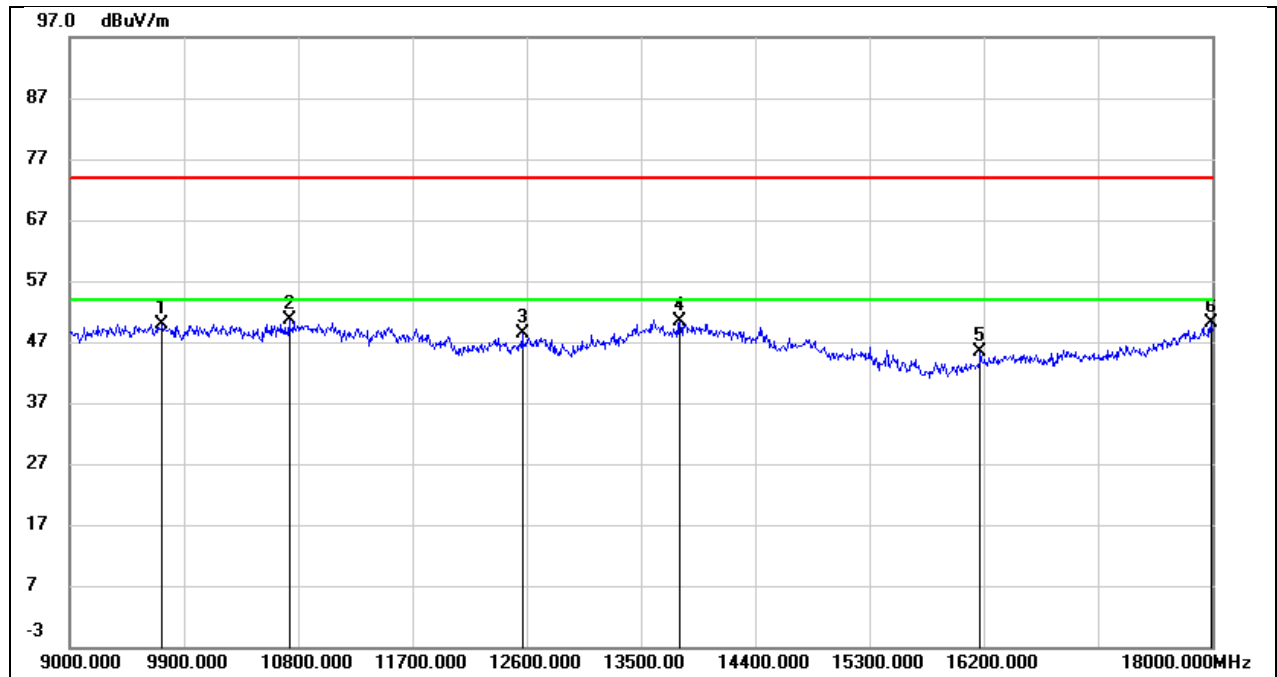


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9729.000	36.25	13.71	49.96	74.00	-24.04	peak
2	10728.000	35.82	14.80	50.62	74.00	-23.38	peak
3	12564.000	29.56	18.85	48.41	74.00	-25.59	peak
4	13806.000	27.60	22.75	50.35	74.00	-23.65	peak
5	16173.000	23.05	22.31	45.36	74.00	-28.64	peak
6	17991.000	20.91	29.11	50.02	74.00	-23.98	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	5985
Polarity:	Vertical	Test Voltage:	DC 5V

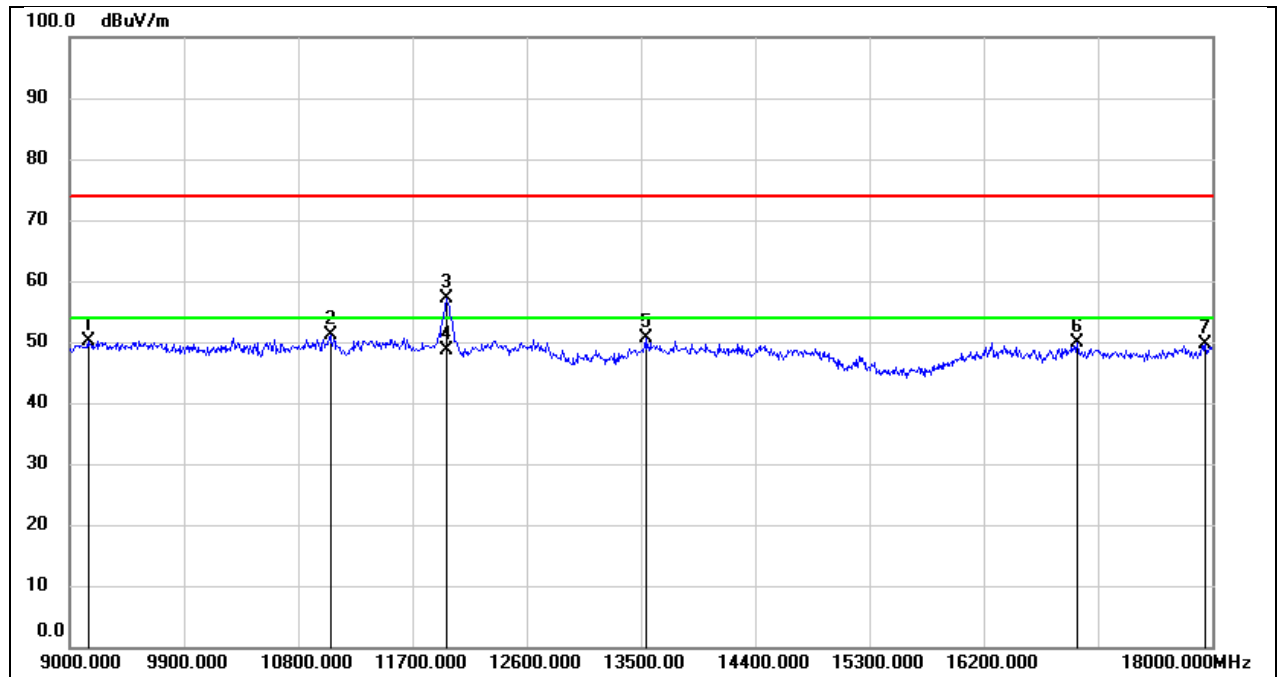


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9144.000	38.61	11.55	50.16	74.00	-23.84	peak
2	11052.000	36.19	14.82	51.01	74.00	-22.99	peak
3	11970.000	39.47	17.64	57.11	74.00	-16.89	peak
4	11970.000	31.10	17.64	48.74	54.00	-5.26	AVG
5	13536.000	29.92	20.61	50.53	74.00	-23.47	peak
6	16938.000	25.36	24.64	50.00	74.00	-24.00	peak
7	17946.000	22.99	26.73	49.72	74.00	-24.28	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6145
Polarity:	Horizontal	Test Voltage:	DC 5V

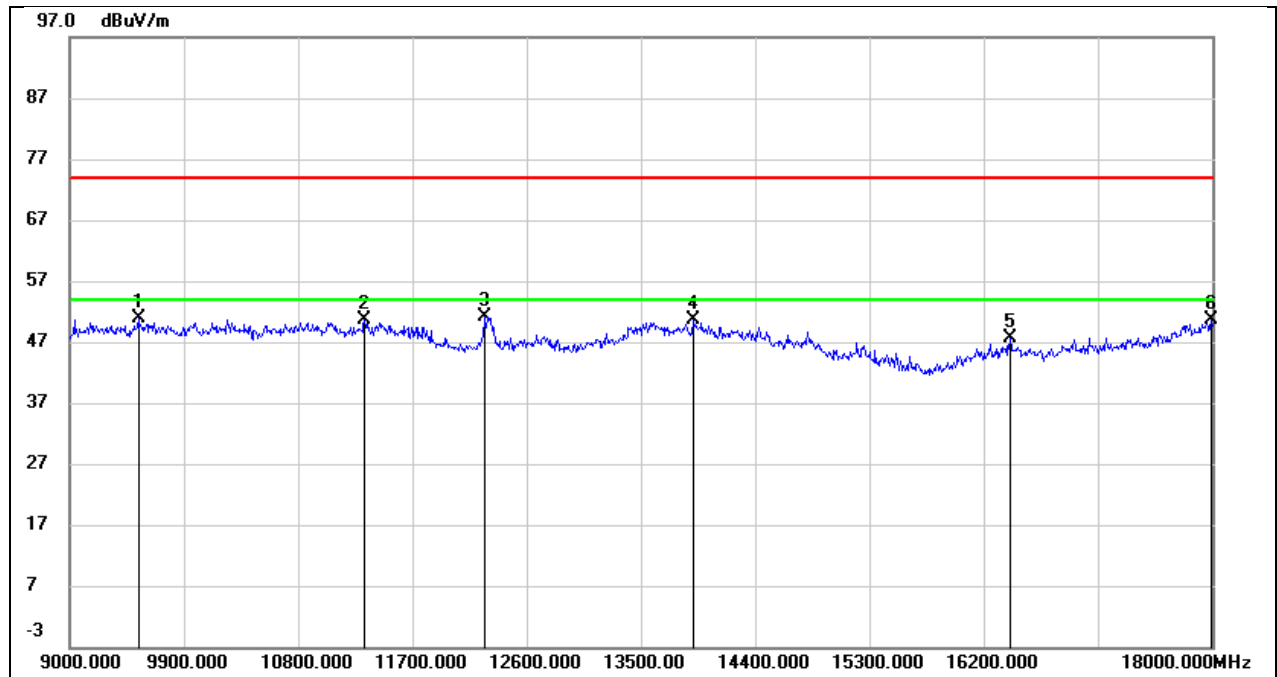


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9540.000	37.80	13.04	50.84	74.00	-23.16	peak
2	11322.000	33.61	17.06	50.67	74.00	-23.33	peak
3	12267.000	32.46	18.78	51.24	74.00	-22.76	peak
4	13914.000	27.60	23.02	50.62	74.00	-23.38	peak
5	16407.000	24.95	22.64	47.59	74.00	-26.41	peak
6	17991.000	21.41	29.11	50.52	74.00	-23.48	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6145
Polarity:	Vertical	Test Voltage:	DC 5V

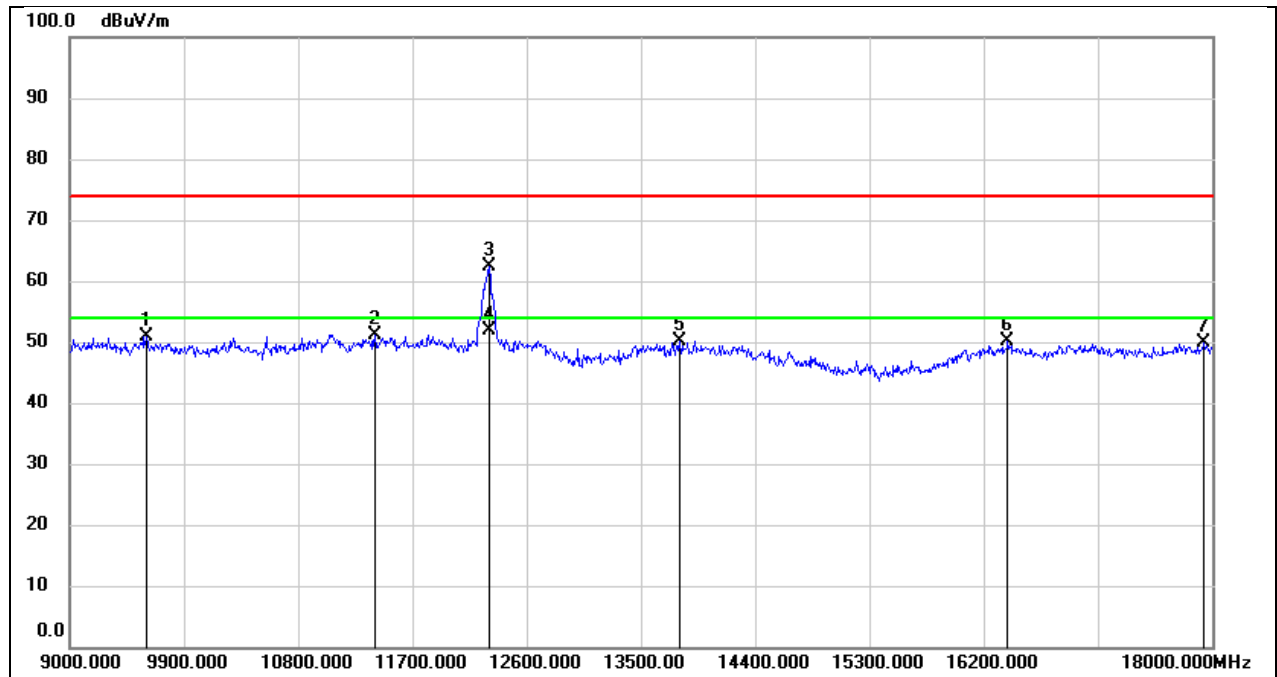


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9603.000	37.69	13.24	50.93	74.00	-23.07	peak
2	11403.000	35.12	16.12	51.24	74.00	-22.76	peak
3	12303.000	44.67	17.83	62.50	74.00	-11.50	peak
4	12303.000	34.07	17.83	51.90	54.00	-2.10	AVG
5	13806.000	29.01	21.11	50.12	74.00	-23.88	peak
6	16389.000	25.54	24.49	50.03	74.00	-23.97	peak
7	17937.000	23.16	26.68	49.84	74.00	-24.16	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6385
Polarity:	Horizontal	Test Voltage:	DC 5V

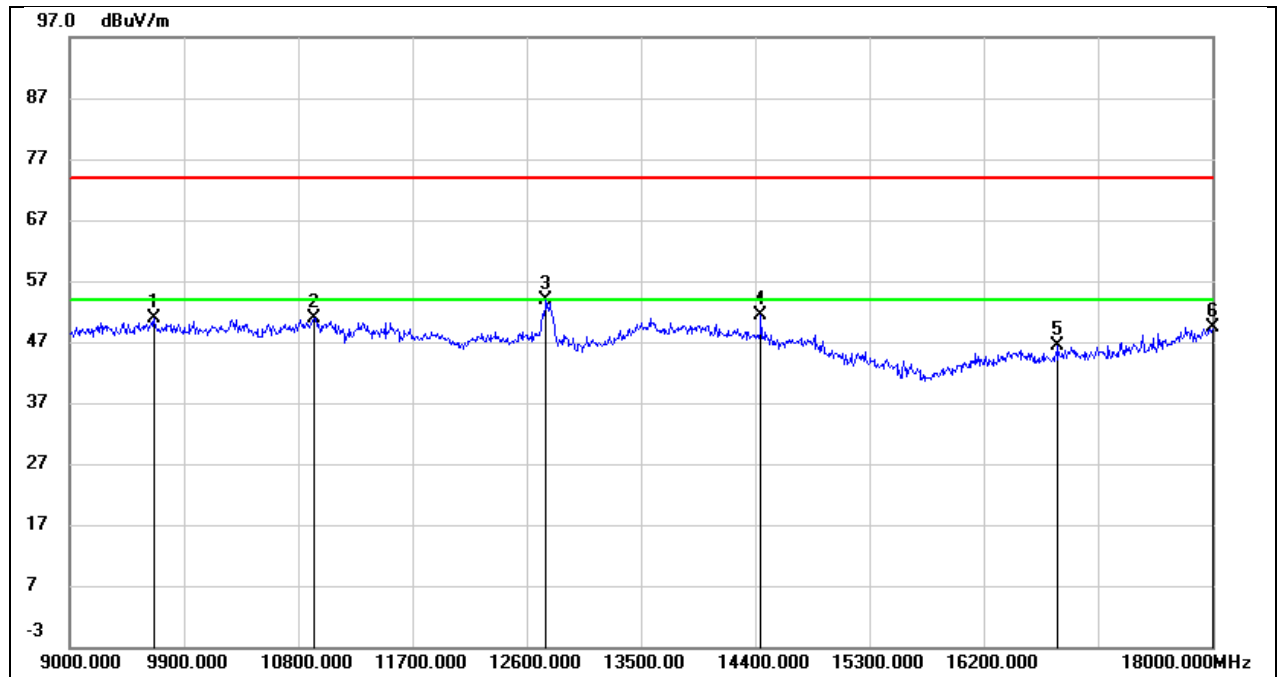


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9666.000	37.27	13.56	50.83	74.00	-23.17	peak
2	10926.000	35.54	15.28	50.82	74.00	-23.18	peak
3	12753.000	34.60	19.29	53.89	74.00	-20.11	peak
4	14445.000	29.82	21.50	51.32	74.00	-22.68	peak
5	16785.000	23.82	22.58	46.40	74.00	-27.60	peak
6	18000.000	20.14	29.20	49.34	74.00	-24.66	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6385
Polarity:	Vertical	Test Voltage:	DC 5V

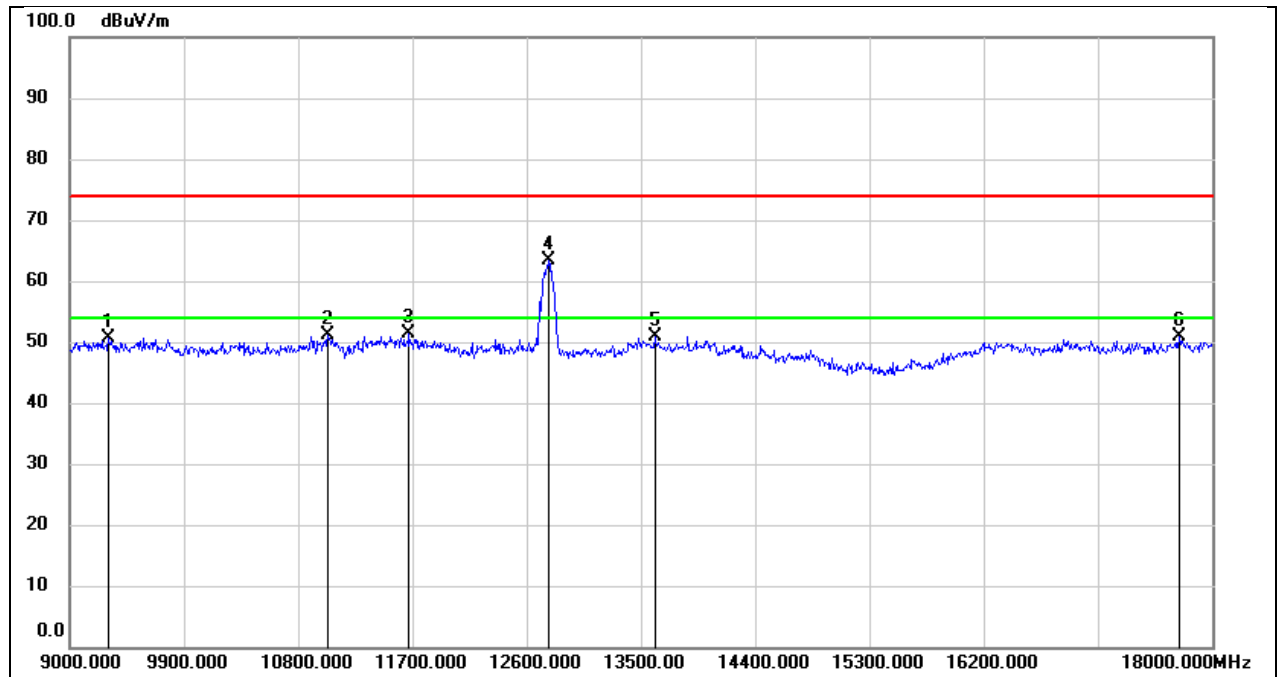


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9306.000	38.61	11.99	50.60	74.00	-23.40	peak
2	11034.000	36.26	14.76	51.02	74.00	-22.98	peak
3	11673.000	34.30	17.17	51.47	74.00	-22.53	peak
4*	12771.000	44.99	18.28	63.27	68.20	-4.93	peak
5	13608.000	30.16	20.75	50.91	74.00	-23.09	peak
6	17739.000	25.11	25.74	50.85	74.00	-23.15	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6465
Polarity:	Horizontal	Test Voltage:	DC 5V

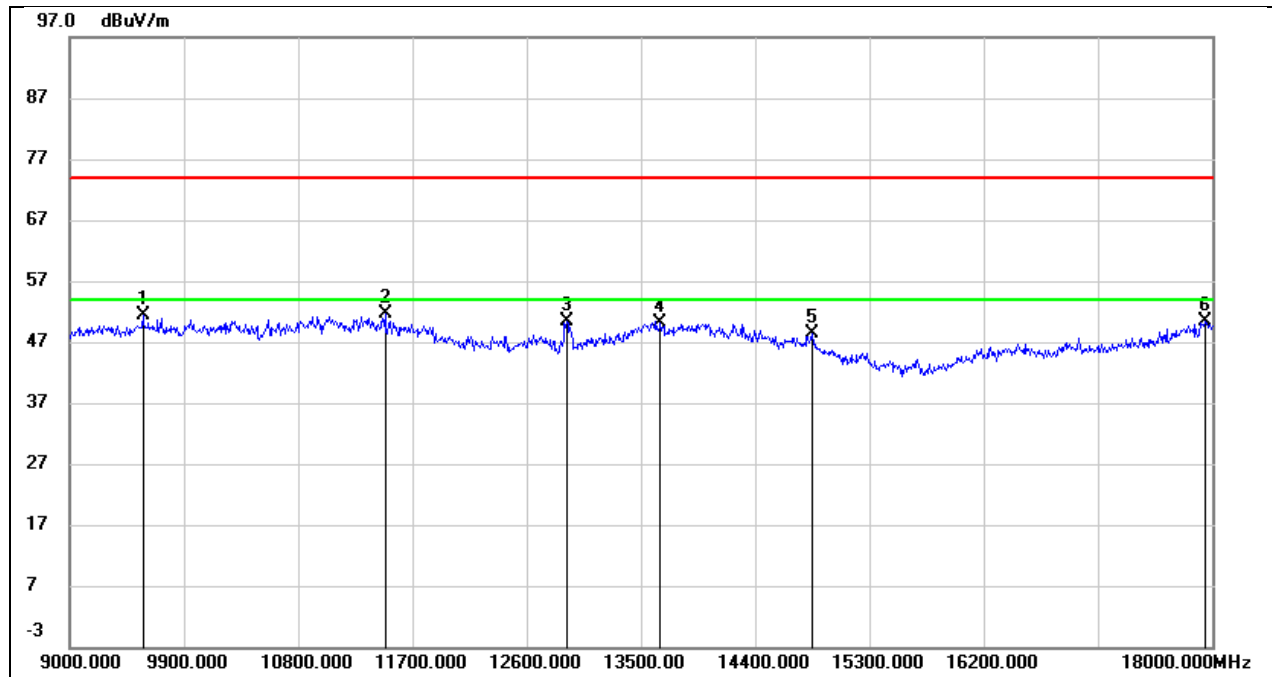


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9576.000	38.21	13.25	51.46	74.00	-22.54	peak
2	11484.000	33.66	17.99	51.65	74.00	-22.35	peak
3	12915.000	30.70	19.67	50.37	74.00	-23.63	peak
4	13653.000	27.71	22.50	50.21	74.00	-23.79	peak
5	14850.000	28.65	19.76	48.41	74.00	-25.59	peak
6	17946.000	21.68	28.69	50.37	74.00	-23.63	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6465
Polarity:	Vertical	Test Voltage:	DC 5V

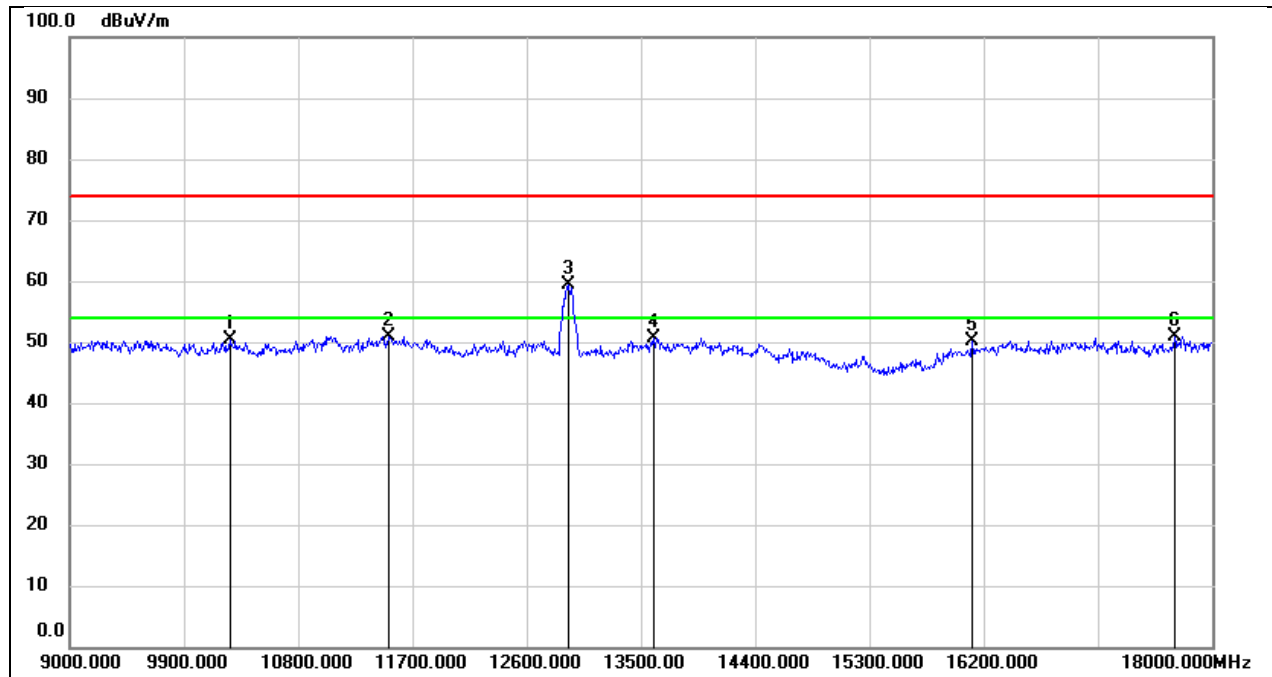


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10260.000	37.10	13.28	50.38	74.00	-23.62	peak
2	11511.000	34.33	16.66	50.99	74.00	-23.01	peak
3*	12924.000	40.73	18.53	59.26	68.20	-8.94	peak
4	13599.000	29.86	20.74	50.60	74.00	-23.40	peak
5	16110.000	26.21	23.85	50.06	74.00	-23.94	peak
6	17703.000	25.23	25.60	50.83	74.00	-23.17	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6545
Polarity:	Horizontal	Test Voltage:	DC 5V

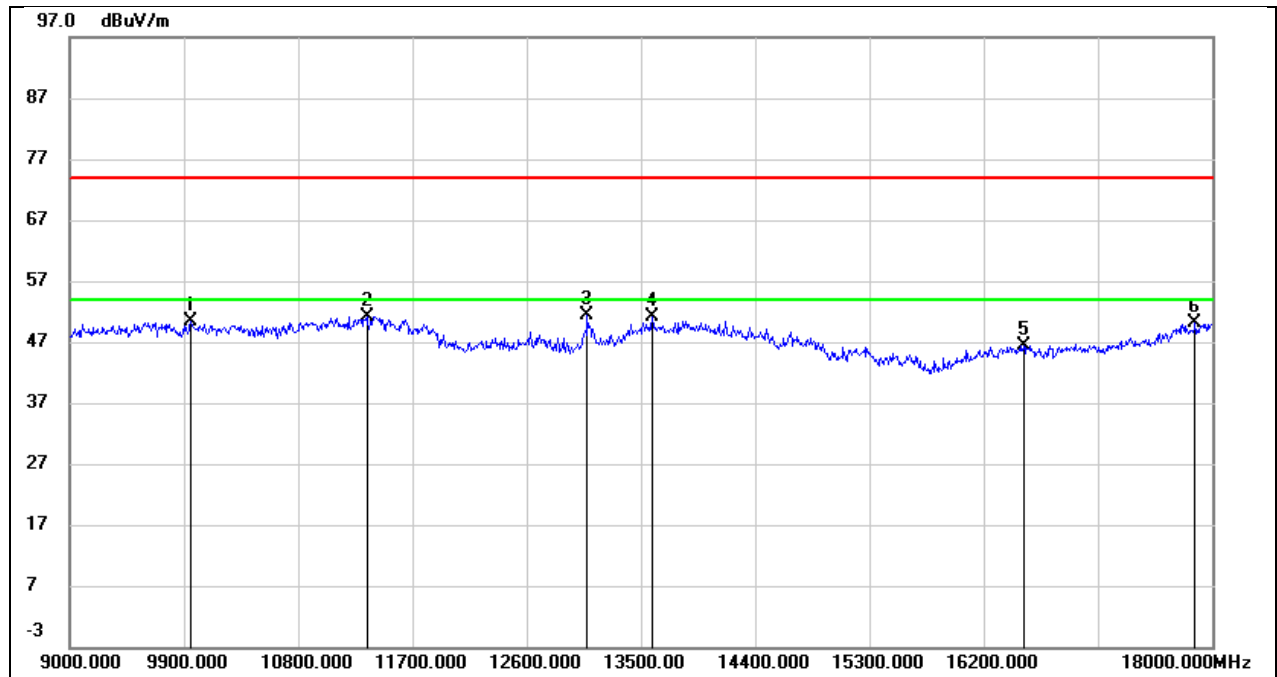


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9954.000	36.54	13.79	50.33	74.00	-23.67	peak
2	11340.000	34.01	17.15	51.16	74.00	-22.84	peak
3	13077.000	31.09	20.25	51.34	74.00	-22.66	peak
4	13590.000	28.61	22.40	51.01	74.00	-22.99	peak
5	16515.000	23.80	22.63	46.43	74.00	-27.57	peak
6	17865.000	22.25	27.91	50.16	74.00	-23.84	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6545
Polarity:	Vertical	Test Voltage:	DC 5V

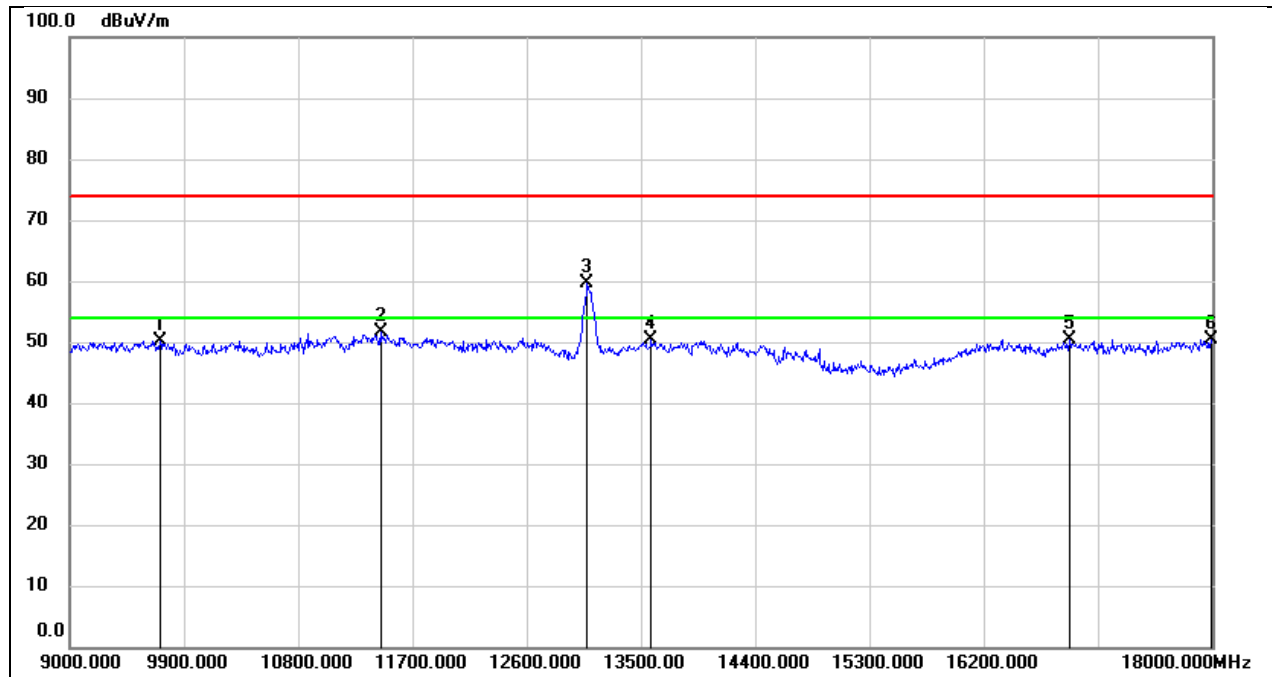


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9711.000	36.80	13.37	50.17	74.00	-23.83	peak
2	11448.000	35.18	16.35	51.53	74.00	-22.47	peak
3*	13077.000	40.75	18.97	59.72	68.20	-8.48	peak
4	13581.000	29.70	20.70	50.40	74.00	-23.60	peak
5	16875.000	25.85	24.47	50.32	74.00	-23.68	peak
6	17991.000	23.49	26.95	50.44	74.00	-23.56	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6705
Polarity:	Horizontal	Test Voltage:	DC 5V

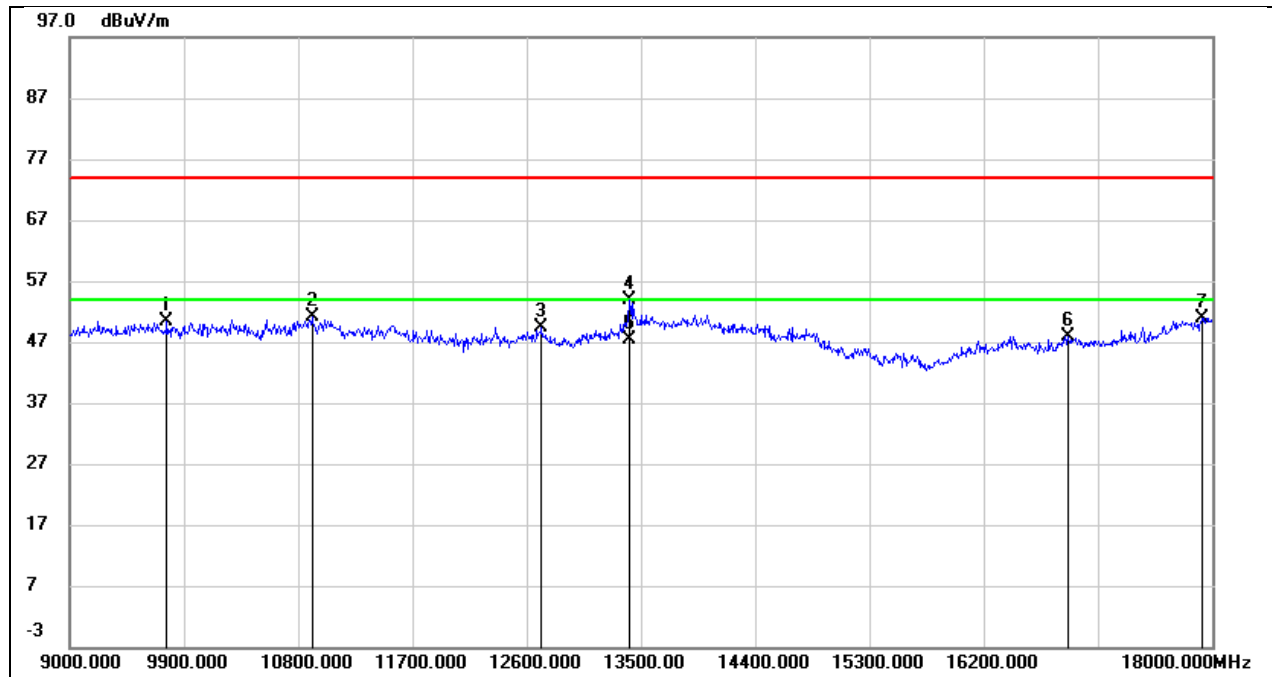


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9765.000	36.68	13.80	50.48	74.00	-23.52	peak
2	10908.000	35.99	15.23	51.22	74.00	-22.78	peak
3	12717.000	30.09	19.19	49.28	74.00	-24.72	peak
4	13410.000	32.05	21.87	53.92	74.00	-20.08	peak
5	13410.000	25.48	21.87	47.35	54.00	-6.65	AVG
6	16866.000	25.20	22.75	47.95	74.00	-26.05	peak
7	17919.000	22.56	28.42	50.98	74.00	-23.02	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6705
Polarity:	Vertical	Test Voltage:	DC 5V

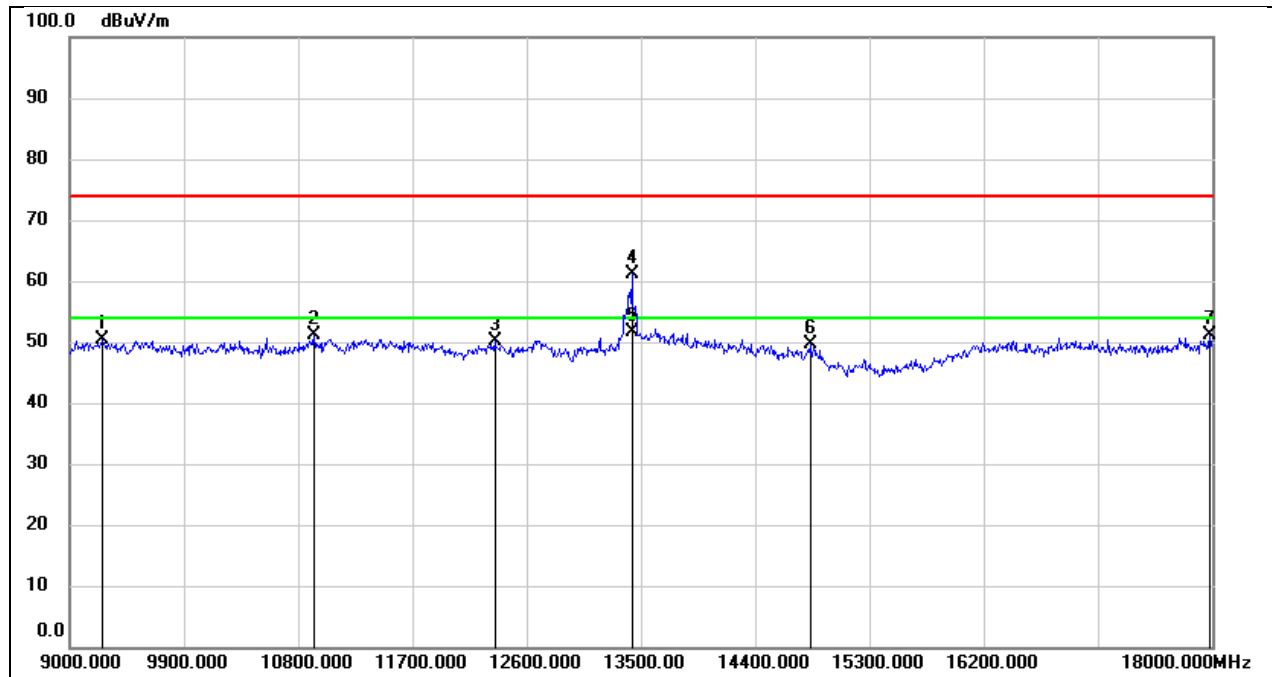


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9261.000	38.48	11.86	50.34	74.00	-23.66	peak
2	10926.000	36.57	14.57	51.14	74.00	-22.86	peak
3	12348.000	32.37	17.88	50.25	74.00	-23.75	peak
4	13428.000	40.71	20.32	61.03	74.00	-12.97	peak
5	13428.000	31.43	20.32	51.75	54.00	-2.25	AVG
6	14841.000	29.41	20.18	49.59	74.00	-24.41	peak
7	17982.000	24.23	26.91	51.14	74.00	-22.86	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6785
Polarity:	Horizontal	Test Voltage:	DC 5V

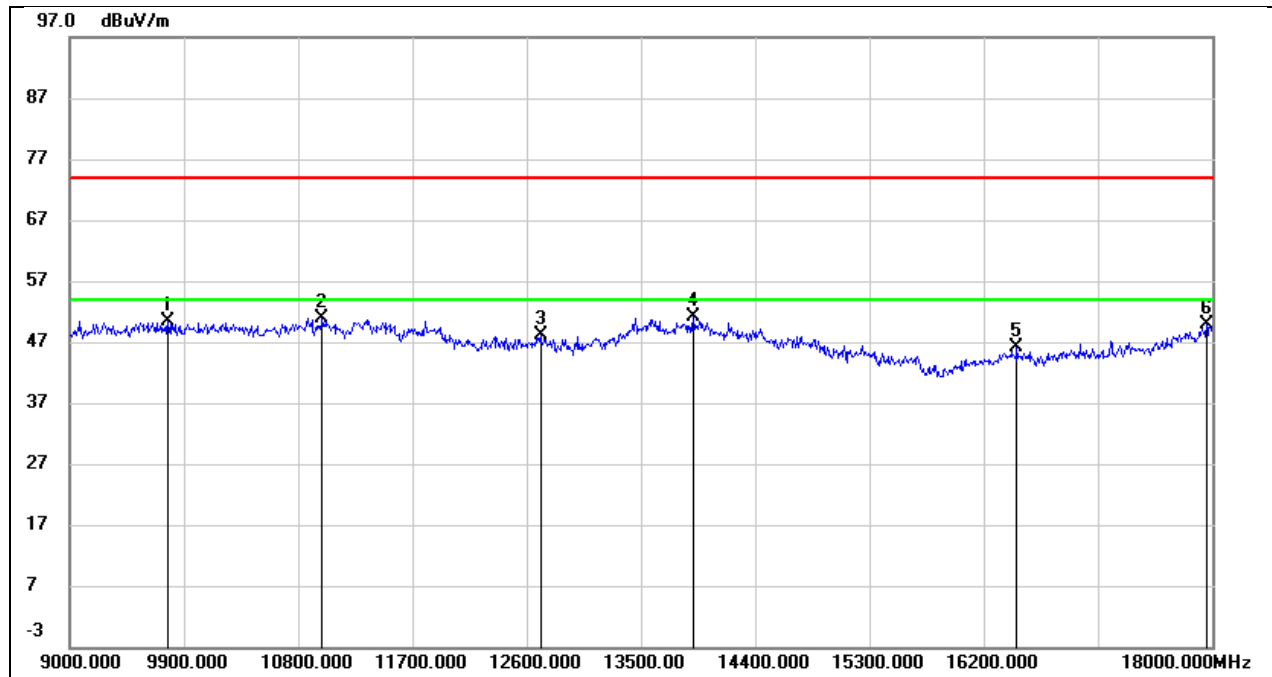


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9774.000	36.62	13.82	50.44	74.00	-23.56	peak
2	10989.000	35.42	15.42	50.84	74.00	-23.16	peak
3	12708.000	28.87	19.17	48.04	74.00	-25.96	peak
4	13914.000	27.99	23.02	51.01	74.00	-22.99	peak
5	16461.000	23.43	22.64	46.07	74.00	-27.93	peak
6	17955.000	21.20	28.77	49.97	74.00	-24.03	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6785
Polarity:	Vertical	Test Voltage:	DC 5V

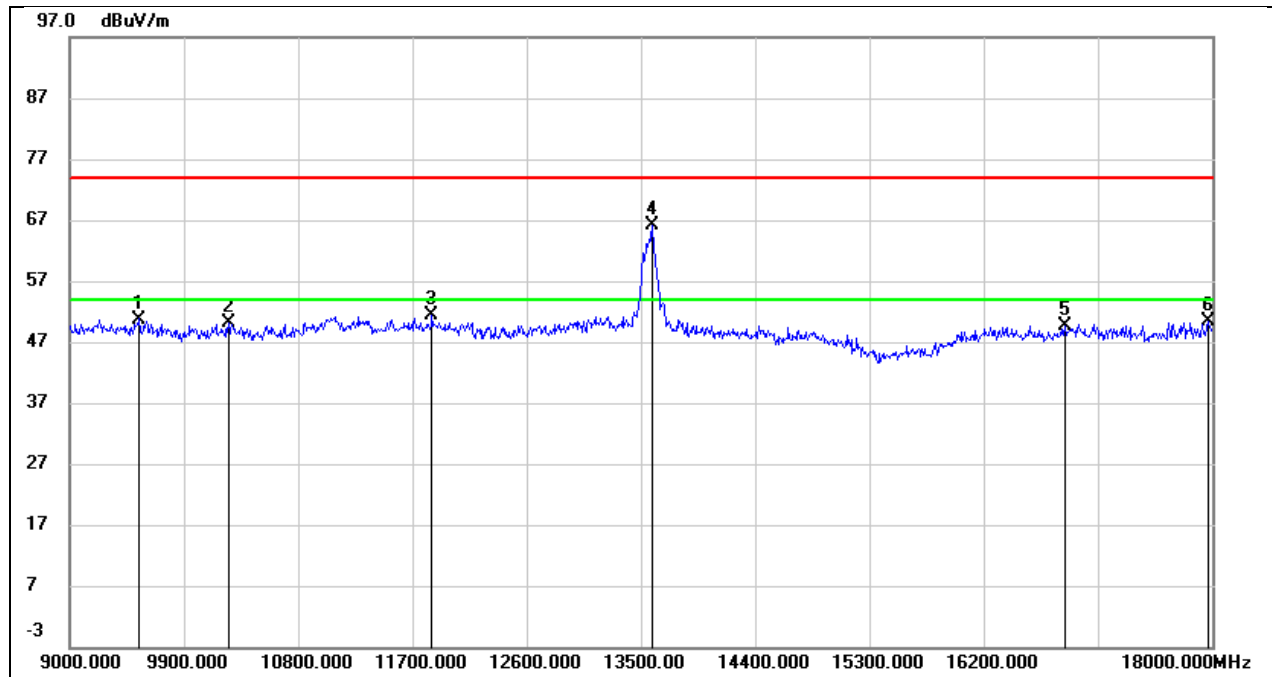


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9549.000	37.73	13.02	50.75	74.00	-23.25	peak
2	10251.000	36.94	13.26	50.20	74.00	-23.80	peak
3	11853.000	34.01	17.39	51.40	74.00	-22.60	peak
4*	13590.000	45.36	20.72	66.08	68.20	-2.12	peak
5	16839.000	25.31	24.39	49.70	74.00	-24.30	peak
6	17964.000	23.62	26.81	50.43	74.00	-23.57	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6865
Polarity:	Horizontal	Test Voltage:	DC 5V

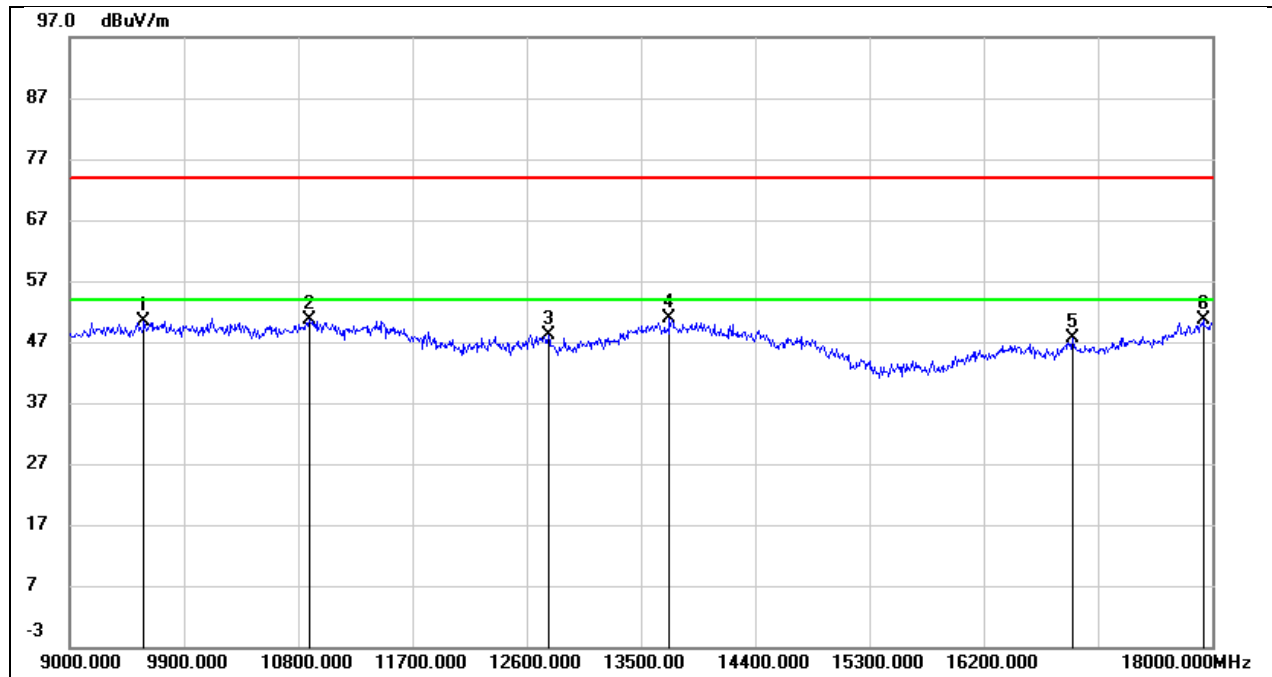


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.00	13.30	50.30	74.00	-23.70	peak
2	10890.000	35.40	15.19	50.59	74.00	-23.41	peak
3	12771.000	28.71	19.34	48.05	74.00	-25.95	peak
4	13725.000	28.14	22.62	50.76	74.00	-23.24	peak
5	16902.000	24.81	22.84	47.65	74.00	-26.35	peak
6	17928.000	22.05	28.51	50.56	74.00	-23.44	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6865
Polarity:	Vertical	Test Voltage:	DC 5V

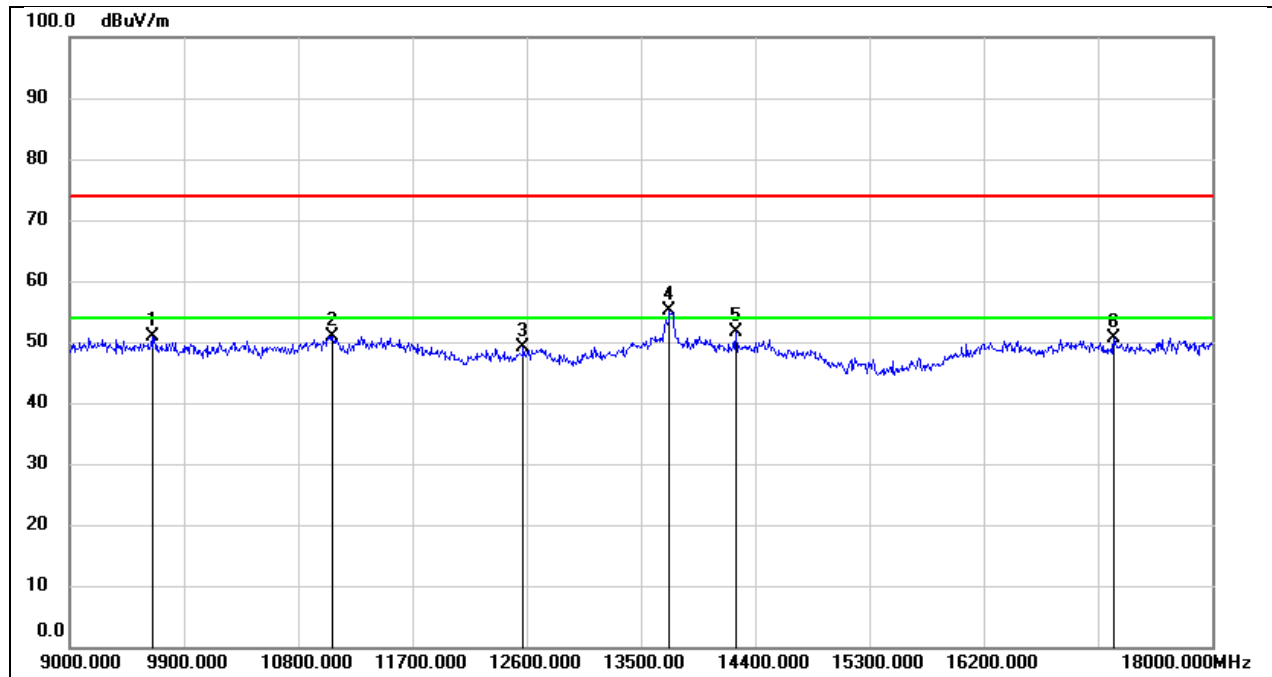


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9648.000	37.56	13.29	50.85	74.00	-23.15	peak
2	11070.000	36.10	14.89	50.99	74.00	-23.01	peak
3	12573.000	31.12	17.91	49.03	74.00	-24.97	peak
4*	13725.000	34.25	20.97	55.22	68.20	-12.98	peak
5	14247.000	30.19	21.38	51.57	74.00	-22.43	peak
6	17226.000	25.76	24.82	50.58	74.00	-23.42	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6945
Polarity:	Horizontal	Test Voltage:	DC 5V

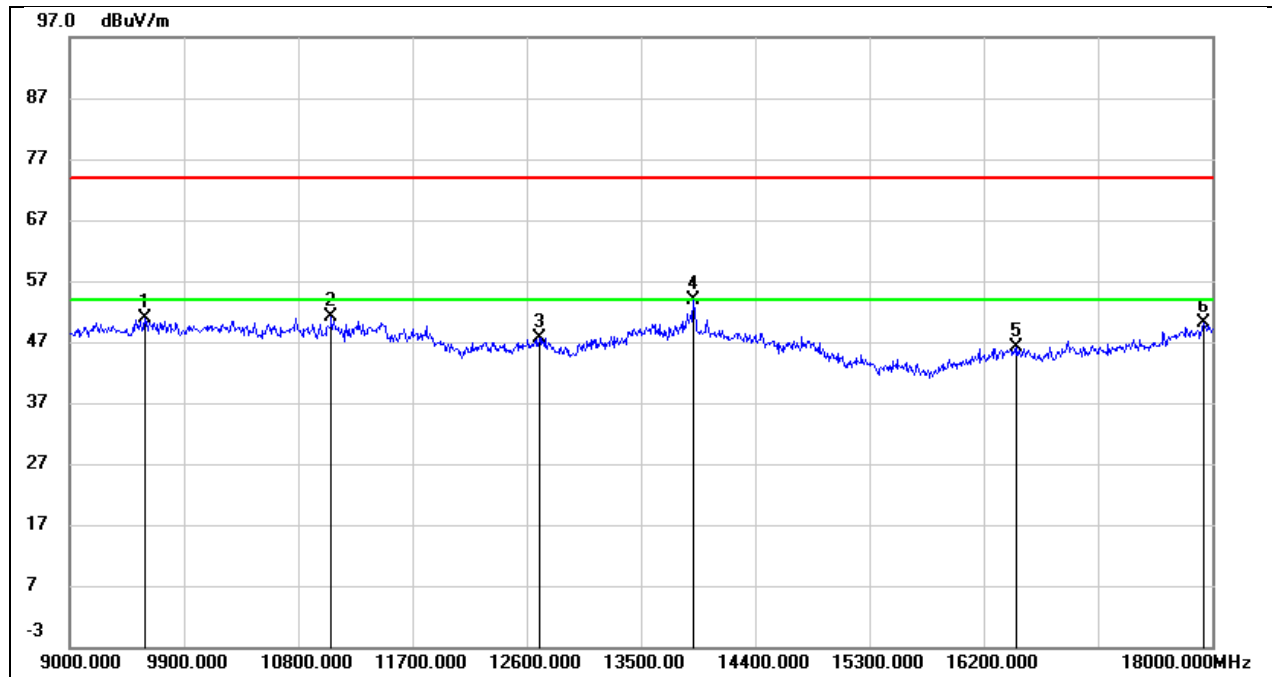


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9594.000	37.58	13.34	50.92	74.00	-23.08	peak
2	11061.000	35.34	15.74	51.08	74.00	-22.92	peak
3	12699.000	28.50	19.15	47.65	74.00	-26.35	peak
4	13914.000	30.86	23.02	53.88	74.00	-20.12	peak
5	16461.000	23.41	22.64	46.05	74.00	-27.95	peak
6	17928.000	21.54	28.51	50.05	74.00	-23.95	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	6945
Polarity:	Vertical	Test Voltage:	DC 5V

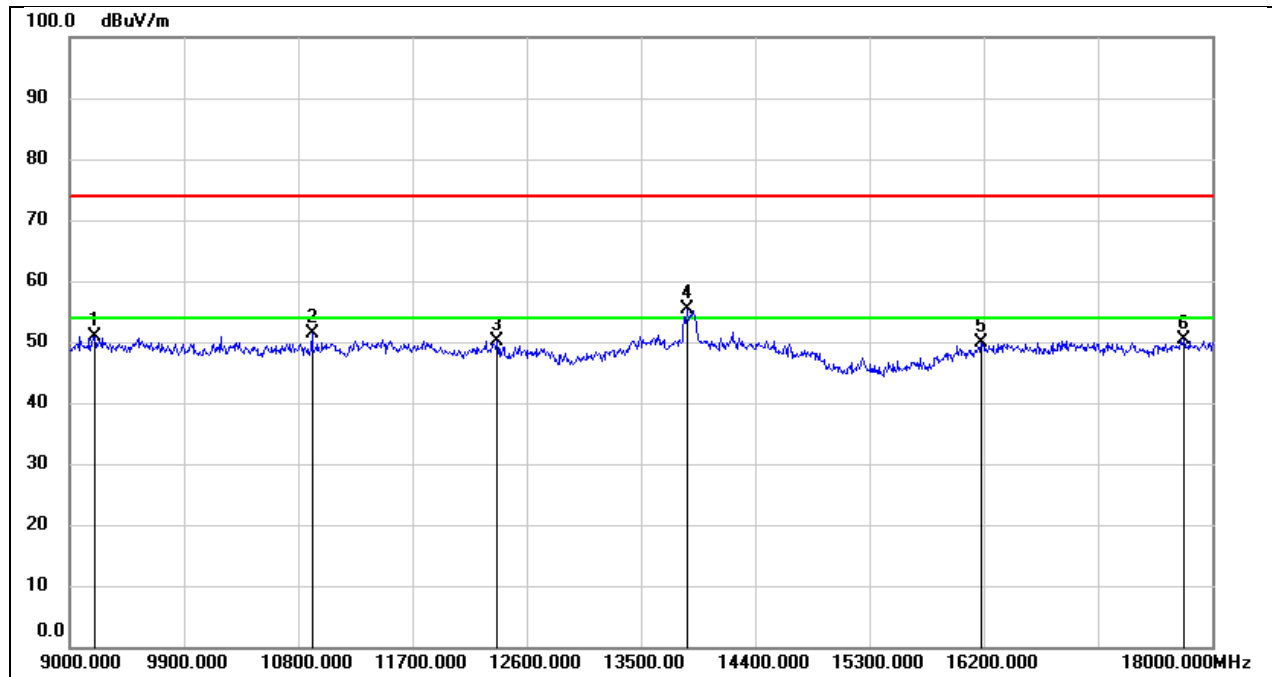


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9198.000	39.25	11.68	50.93	74.00	-23.07	peak
2	10908.000	36.88	14.54	51.42	74.00	-22.58	peak
3	12366.000	32.36	17.89	50.25	74.00	-23.75	peak
4*	13860.000	34.15	21.26	55.41	68.20	-12.79	peak
5	16182.000	25.29	24.56	49.85	74.00	-24.15	peak
6	17775.000	24.45	25.88	50.33	74.00	-23.67	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	7025
Polarity:	Horizontal	Test Voltage:	DC 5V

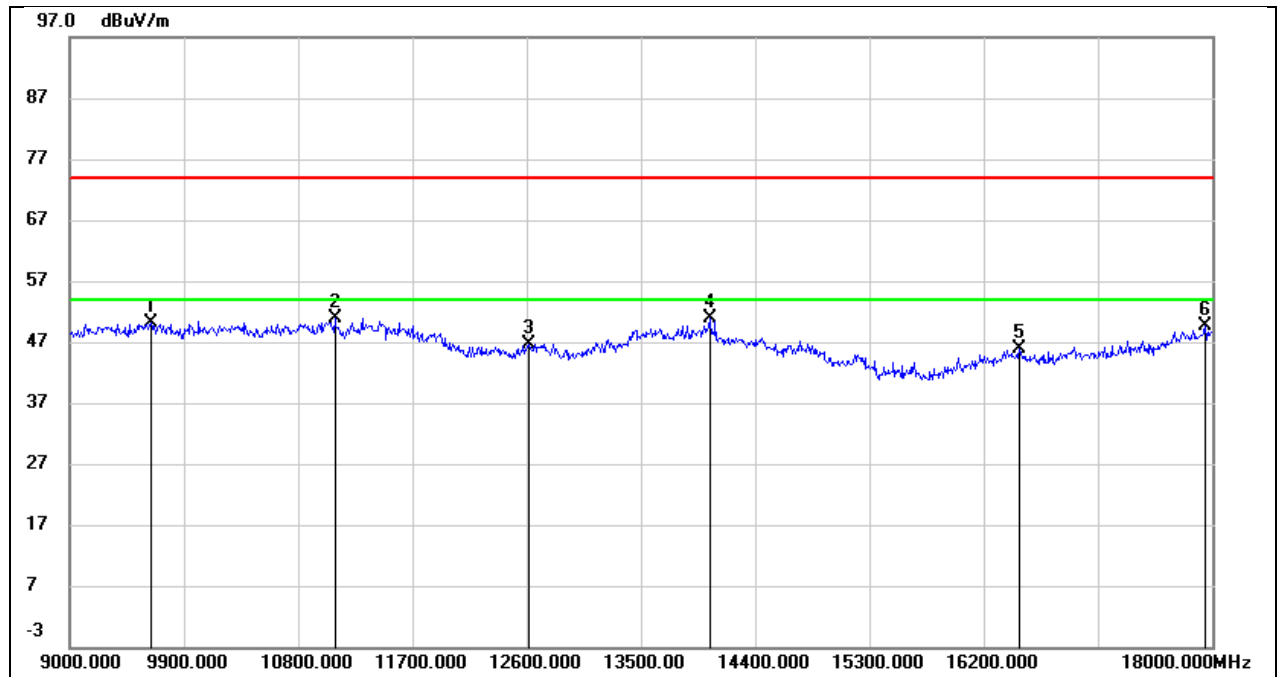


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9639.000	36.63	13.48	50.11	74.00	-23.89	peak
2	11088.000	35.08	15.87	50.95	74.00	-23.05	peak
3	12618.000	27.73	18.93	46.66	74.00	-27.34	peak
4	14040.000	27.79	23.09	50.88	74.00	-23.12	peak
5	16479.000	23.11	22.65	45.76	74.00	-28.24	peak
6	17946.000	20.87	28.69	49.56	74.00	-24.44	peak

Test Mode:	802.11be EHT80	Frequency(MHz):	7025
Polarity:	Vertical	Test Voltage:	DC 5V

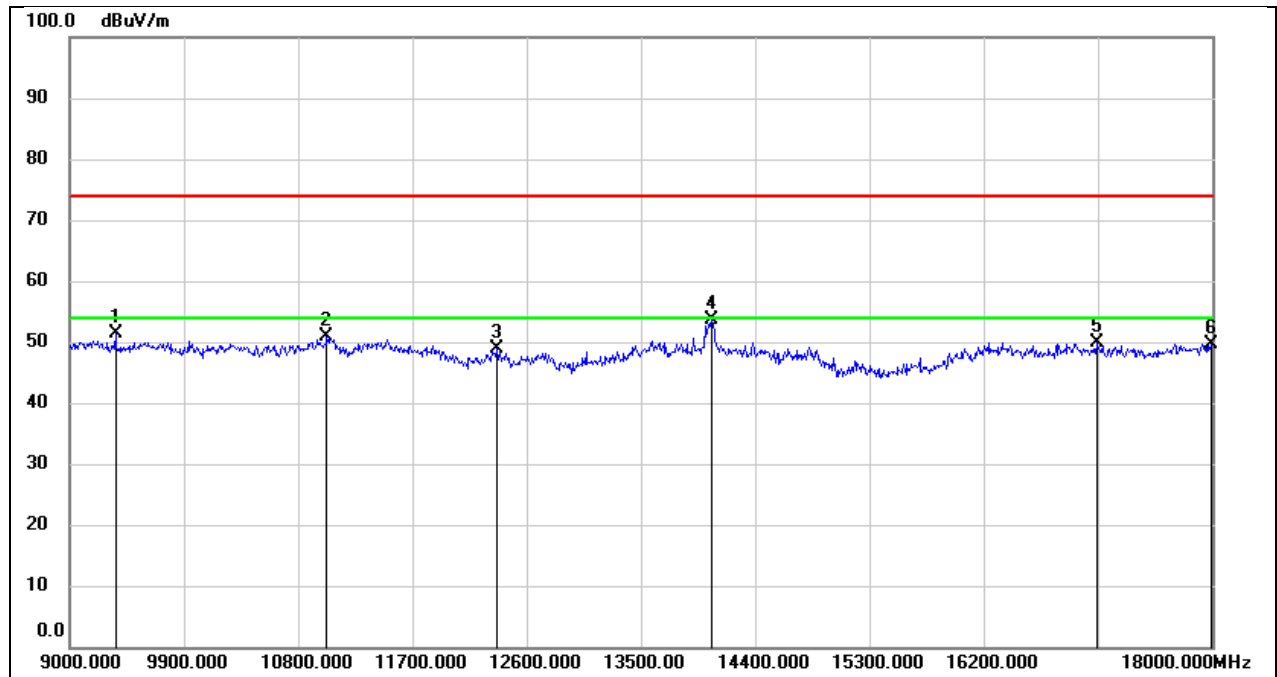


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9360.000	39.20	12.16	51.36	74.00	-22.64	peak
2	11025.000	36.19	14.74	50.93	74.00	-23.07	peak
3	12366.000	31.04	17.89	48.93	74.00	-25.07	peak
4	14058.000	32.07	21.59	53.66	74.00	-20.34	peak
5	17091.000	24.97	24.80	49.77	74.00	-24.23	peak
6	17991.000	22.69	26.95	49.64	74.00	-24.36	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6025
Polarity:	Horizontal	Test Voltage:	DC 5V

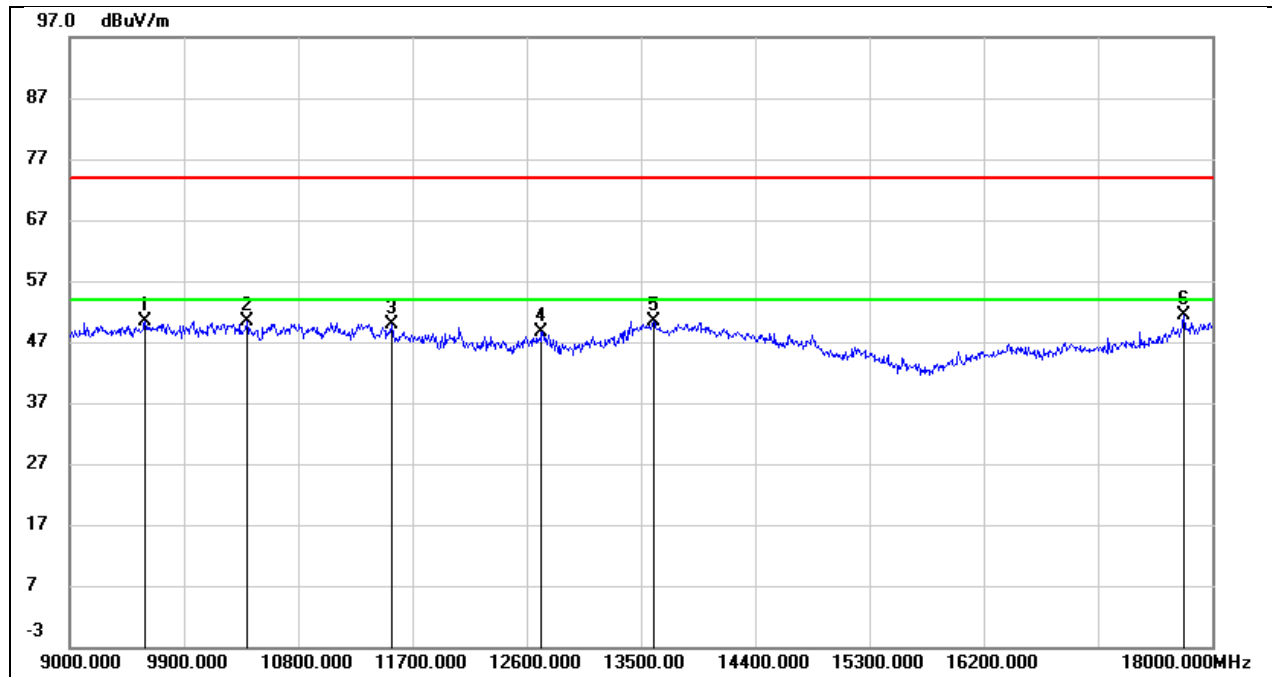


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9594.000	37.10	13.34	50.44	74.00	-23.56	peak
2	10395.000	36.49	13.88	50.37	74.00	-23.63	peak
3	11538.000	31.65	18.27	49.92	74.00	-24.08	peak
4	12717.000	29.43	19.19	48.62	74.00	-25.38	peak
5	13599.000	27.91	22.42	50.33	74.00	-23.67	peak
6	17775.000	24.17	27.09	51.26	74.00	-22.74	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6025
Polarity:	Vertical	Test Voltage:	DC 5V

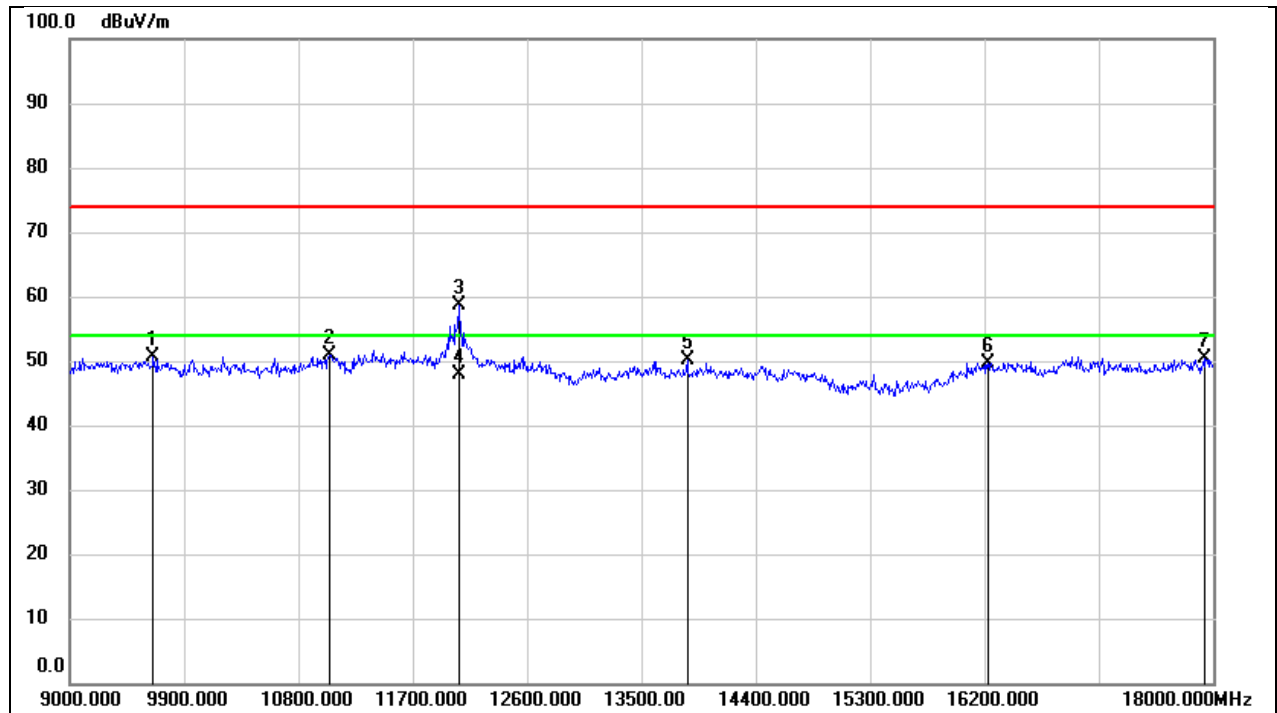


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9657.000	37.44	13.30	50.74	74.00	-23.26	peak
2	11043.000	36.21	14.79	51.00	74.00	-23.00	peak
3	12060.000	40.87	17.70	58.57	74.00	-15.43	peak
4	12060.000	30.06	17.70	47.76	54.00	-6.24	AVG
5	13860.000	28.91	21.26	50.17	74.00	-23.83	peak
6	16227.000	25.04	24.71	49.75	74.00	-24.25	peak
7	17937.000	23.68	26.68	50.36	74.00	-23.64	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6185
Polarity:	Horizontal	Test Voltage:	DC 5V

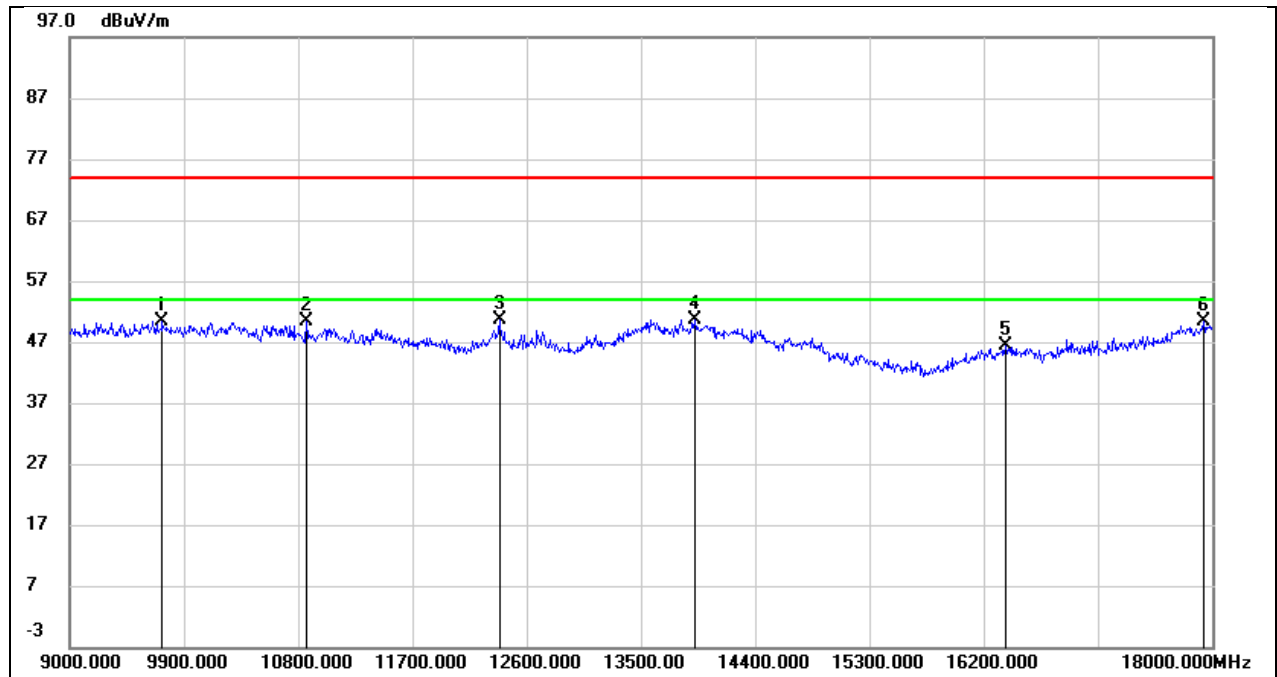


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9729.000	36.76	13.71	50.47	74.00	-23.53	peak
2	10863.000	35.36	15.12	50.48	74.00	-23.52	peak
3	12384.000	31.79	18.87	50.66	74.00	-23.34	peak
4	13923.000	27.56	23.05	50.61	74.00	-23.39	peak
5	16371.000	23.79	22.63	46.42	74.00	-27.58	peak
6	17937.000	21.73	28.60	50.33	74.00	-23.67	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6185
Polarity:	Vertical	Test Voltage:	DC 5V

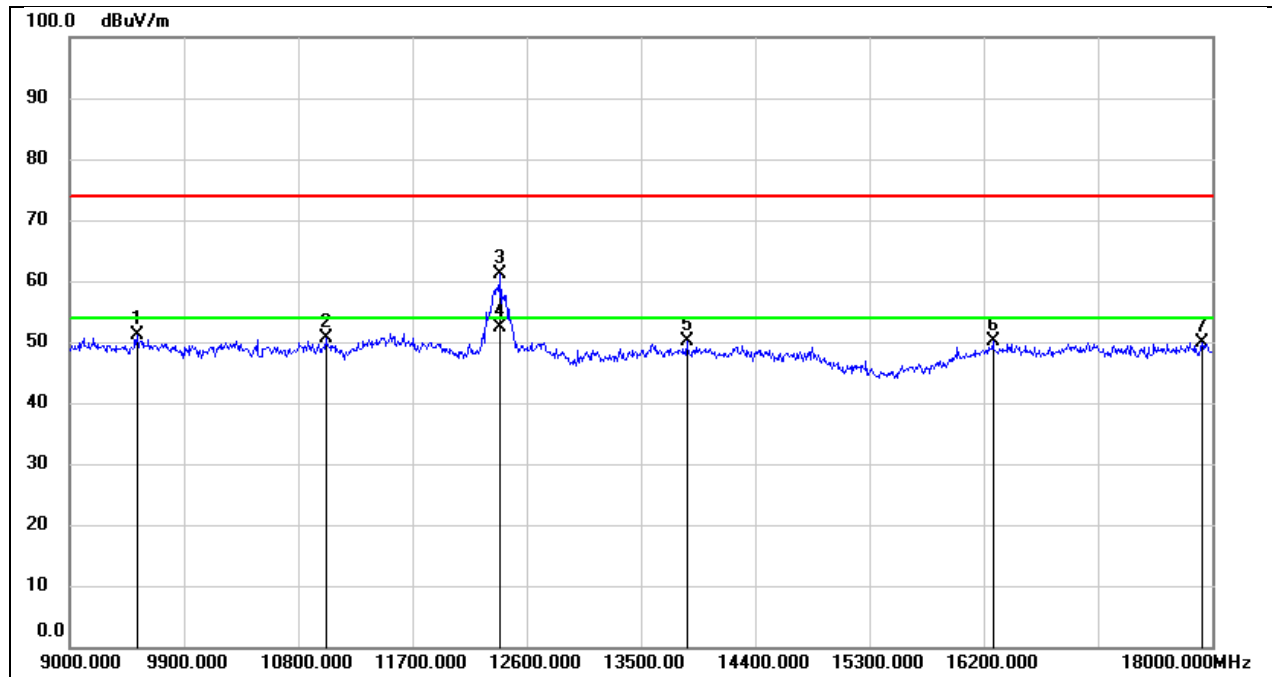


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9531.000	38.12	12.95	51.07	74.00	-22.93	peak
2	11016.000	35.97	14.71	50.68	74.00	-23.32	peak
3	12393.000	43.12	17.93	61.05	74.00	-12.95	peak
4	12393.000	34.53	17.93	52.46	54.00	-1.54	AVG
5	13860.000	28.86	21.26	50.12	74.00	-23.88	peak
6	16272.000	25.39	24.65	50.04	74.00	-23.96	peak
7	17919.000	23.34	26.58	49.92	74.00	-24.08	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6345
Polarity:	Horizontal	Test Voltage:	DC 5V

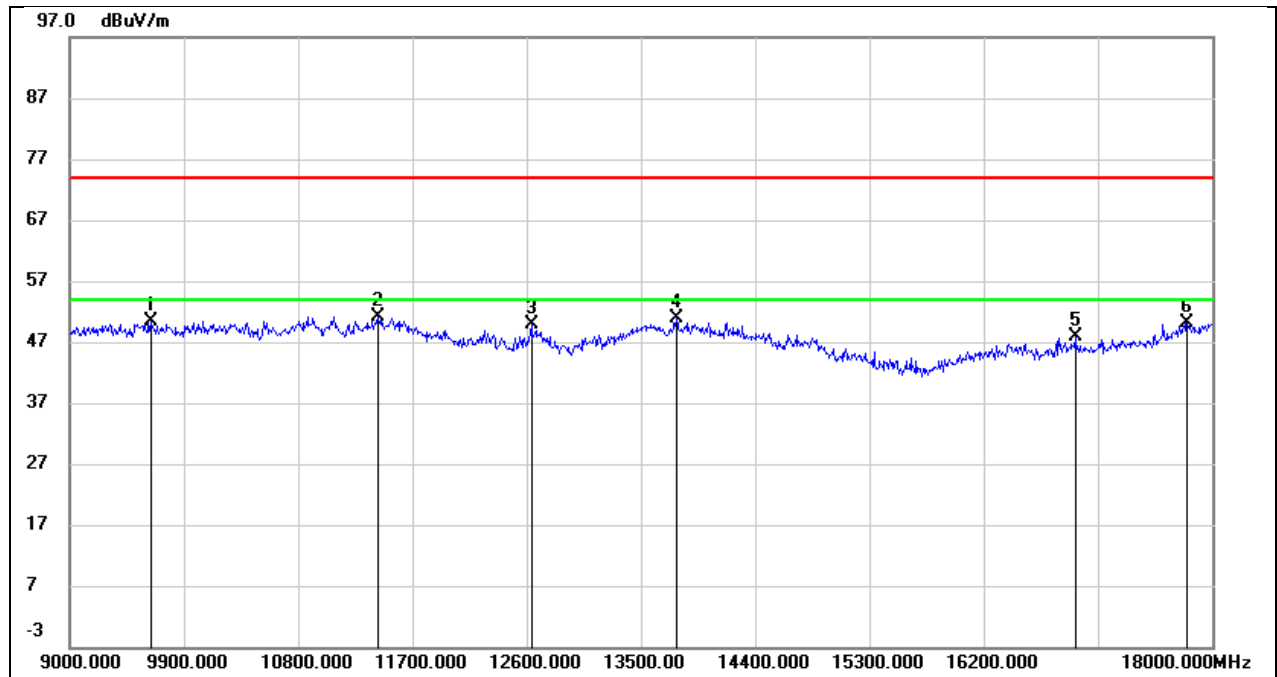


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9639.000	36.89	13.48	50.37	74.00	-23.63	peak
2	11430.000	33.58	17.66	51.24	74.00	-22.76	peak
3	12636.000	31.00	18.98	49.98	74.00	-24.02	peak
4	13779.000	28.13	22.71	50.84	74.00	-23.16	peak
5	16920.000	24.95	22.89	47.84	74.00	-26.16	peak
6	17802.000	22.85	27.32	50.17	74.00	-23.83	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6345
Polarity:	Vertical	Test Voltage:	DC 5V

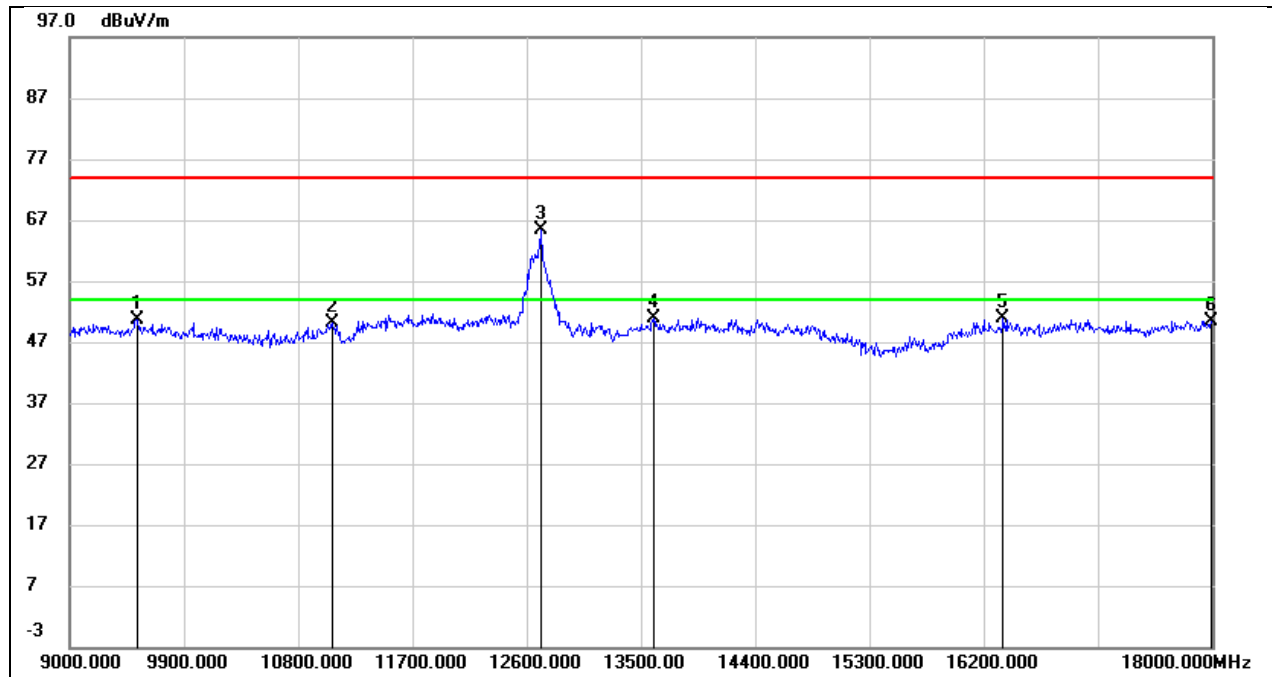


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9531.000	37.69	12.95	50.64	74.00	-23.36	peak
2	11070.000	35.33	14.89	50.22	74.00	-23.78	peak
3*	12717.000	47.18	18.16	65.34	68.20	-2.86	peak
4	13599.000	30.02	20.74	50.76	74.00	-23.24	peak
5	16353.000	26.39	24.54	50.93	74.00	-23.07	peak
6	17991.000	23.48	26.95	50.43	74.00	-23.57	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6505
Polarity:	Horizontal	Test Voltage:	DC 5V

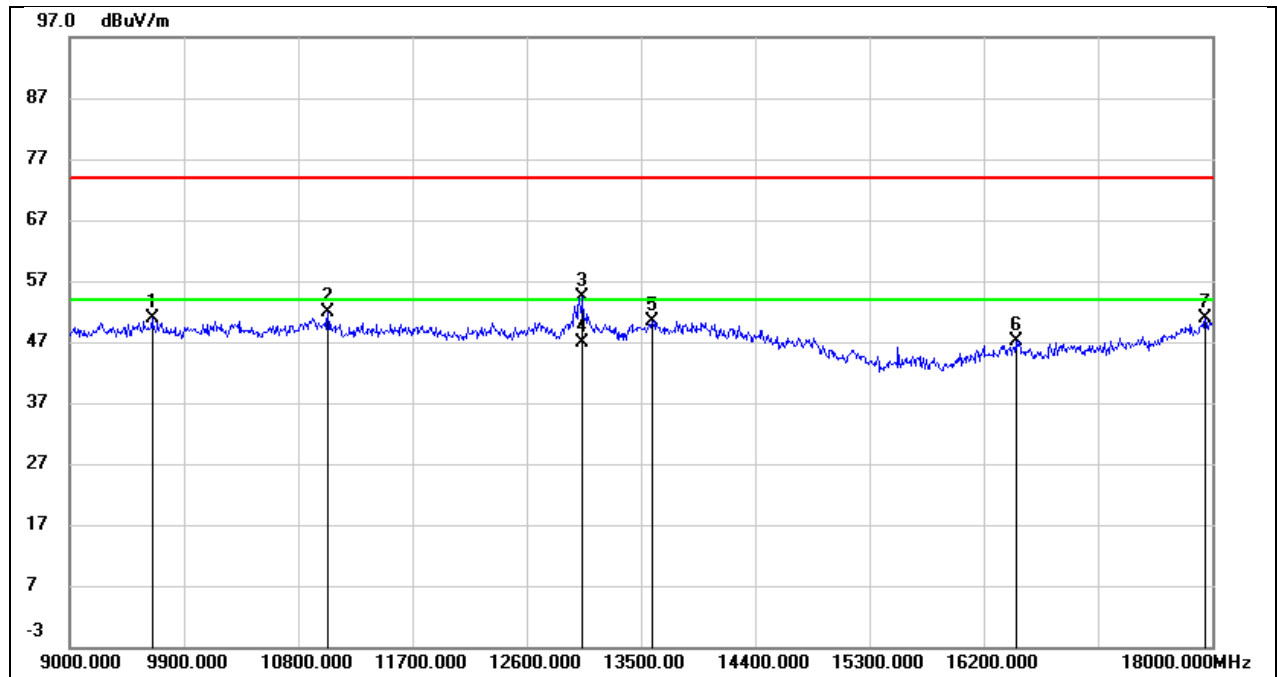


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9648.000	37.29	13.50	50.79	74.00	-23.21	peak
2	11034.000	36.17	15.60	51.77	74.00	-22.23	peak
3	13041.000	34.20	20.07	54.27	74.00	-19.73	peak
4	13041.000	26.77	20.07	46.84	54.00	-7.16	AVG
5	13590.000	28.10	22.40	50.50	74.00	-23.50	peak
6	16452.000	24.46	22.64	47.10	74.00	-26.90	peak
7	17946.000	22.23	28.69	50.92	74.00	-23.08	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6505
Polarity:	Vertical	Test Voltage:	DC 5V

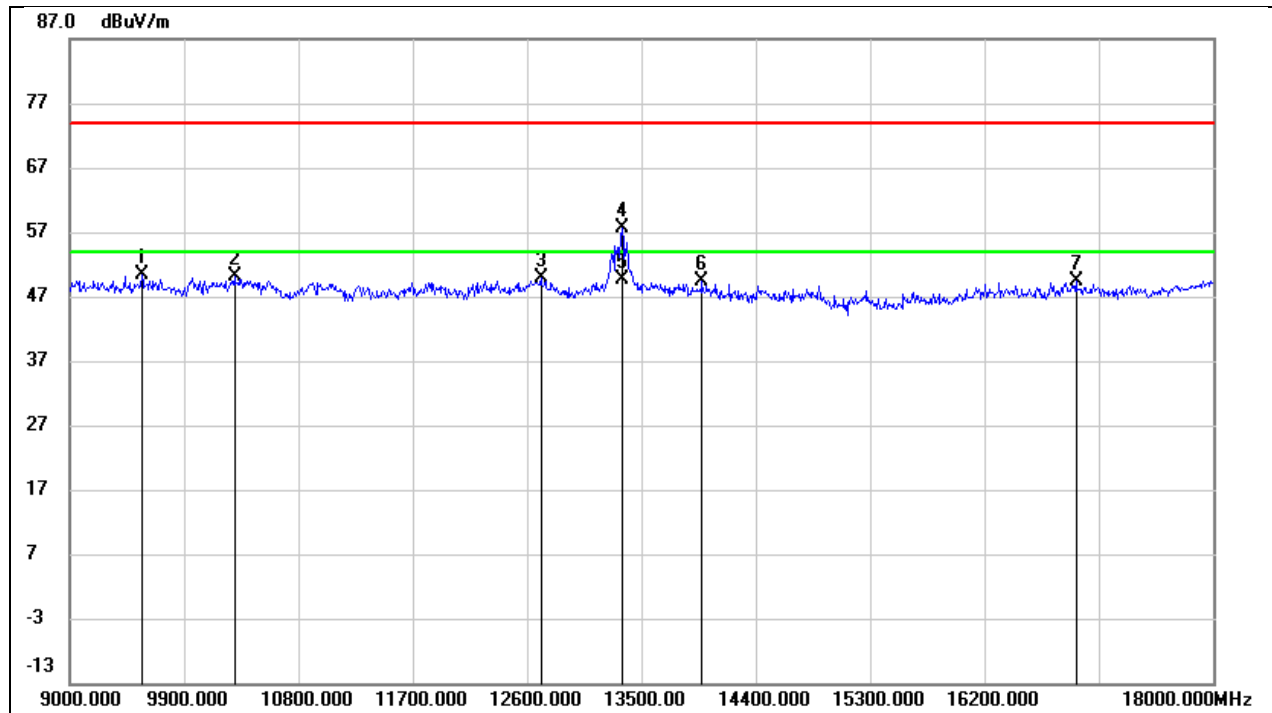


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9567.000	37.35	13.10	50.45	74.00	-23.55	peak
2	10296.000	36.70	13.35	50.05	74.00	-23.95	peak
3	12708.000	31.85	18.15	50.00	74.00	-24.00	peak
4	13347.000	37.61	20.04	57.65	74.00	-16.35	peak
5	13347.000	29.69	20.04	49.73	54.00	-4.27	AVG
6	13977.000	27.73	21.58	49.31	74.00	-24.69	peak
7	16920.000	24.71	24.59	49.30	74.00	-24.70	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6665
Polarity:	Horizontal	Test Voltage:	DC 5V

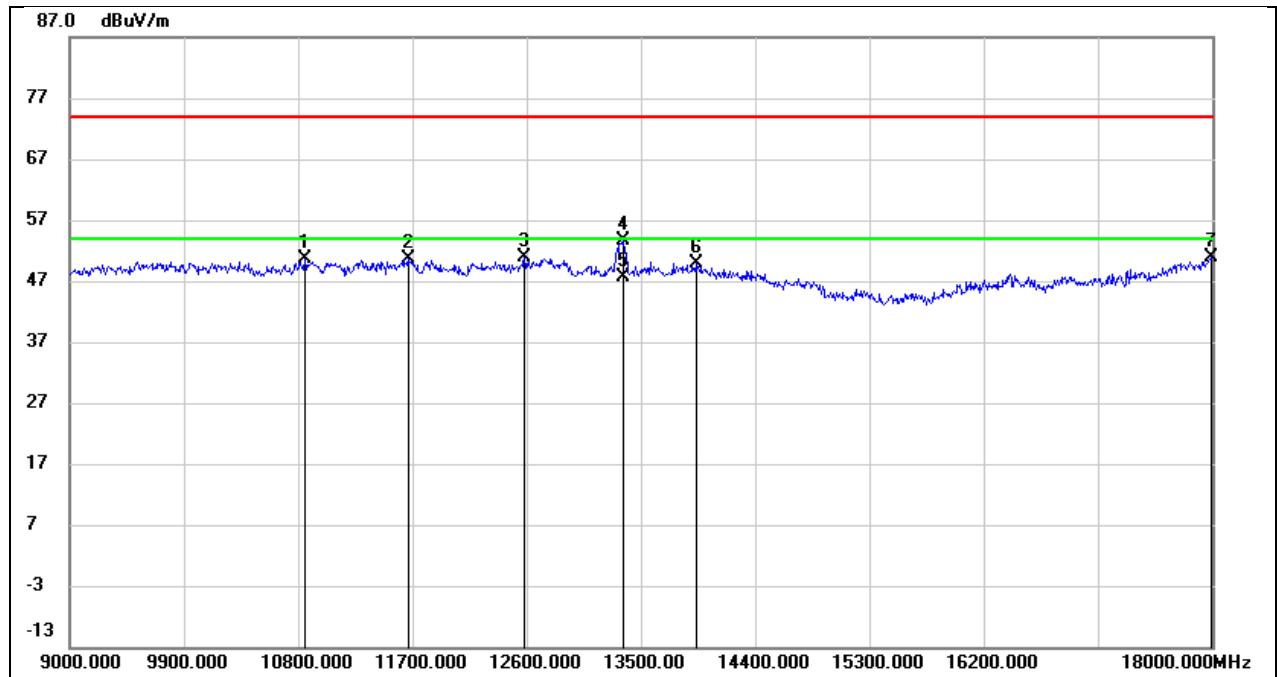


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10854.000	35.50	15.11	50.61	74.00	-23.39	peak
2	11664.000	32.16	18.53	50.69	74.00	-23.31	peak
3	12582.000	32.01	18.86	50.87	74.00	-23.13	peak
4	13365.000	31.94	21.67	53.61	74.00	-20.39	peak
5	13365.000	25.87	21.67	47.54	54.00	-6.46	AVG
6	13932.000	26.73	23.07	49.80	74.00	-24.20	peak
7	17991.000	21.71	29.11	50.82	74.00	-23.18	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6665
Polarity:	Vertical	Test Voltage:	DC 5V

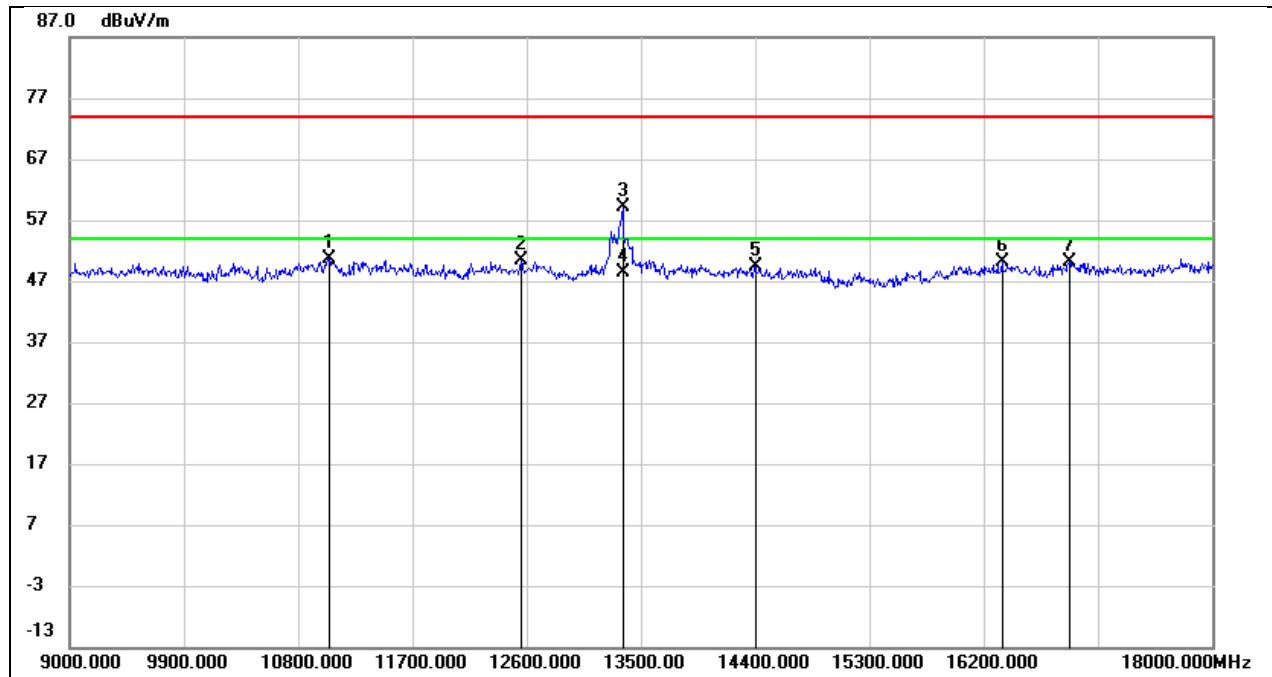


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11043.000	35.87	14.79	50.66	74.00	-23.34	peak
2	12555.000	32.46	17.91	50.37	74.00	-23.63	peak
3	13356.000	38.99	20.08	59.07	74.00	-14.93	peak
4	13356.000	28.27	20.08	48.35	54.00	-5.65	AVG
5	14400.000	28.33	21.14	49.47	74.00	-24.53	peak
6	16344.000	25.49	24.55	50.04	74.00	-23.96	peak
7	16875.000	25.67	24.47	50.14	74.00	-23.86	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6825
Polarity:	Horizontal	Test Voltage:	DC 5V

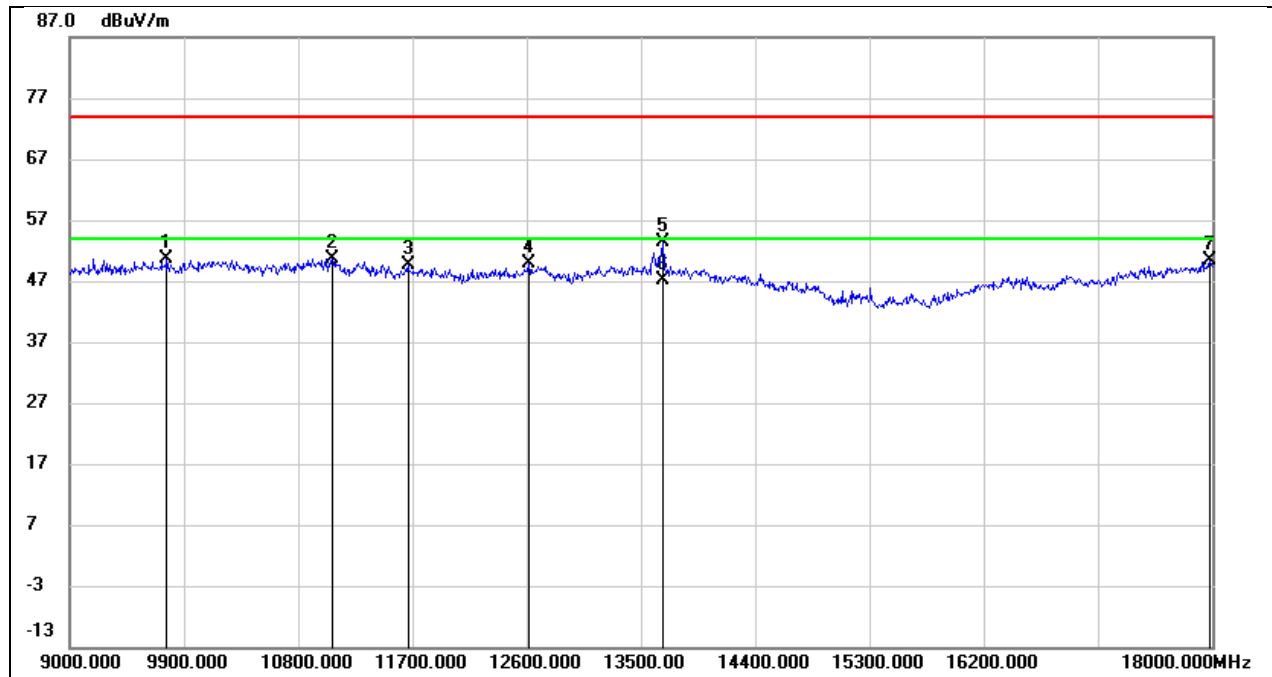


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9765.000	36.94	13.80	50.74	74.00	-23.26	peak
2	11070.000	34.95	15.78	50.73	74.00	-23.27	peak
3	11664.000	30.98	18.53	49.51	74.00	-24.49	peak
4	12618.000	30.89	18.93	49.82	74.00	-24.18	peak
5	13671.000	30.95	22.54	53.49	74.00	-20.51	peak
6	13671.000	24.58	22.54	47.12	54.00	-6.88	AVG
7	17982.000	21.46	29.03	50.49	74.00	-23.51	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6825
Polarity:	Vertical	Test Voltage:	DC 5V

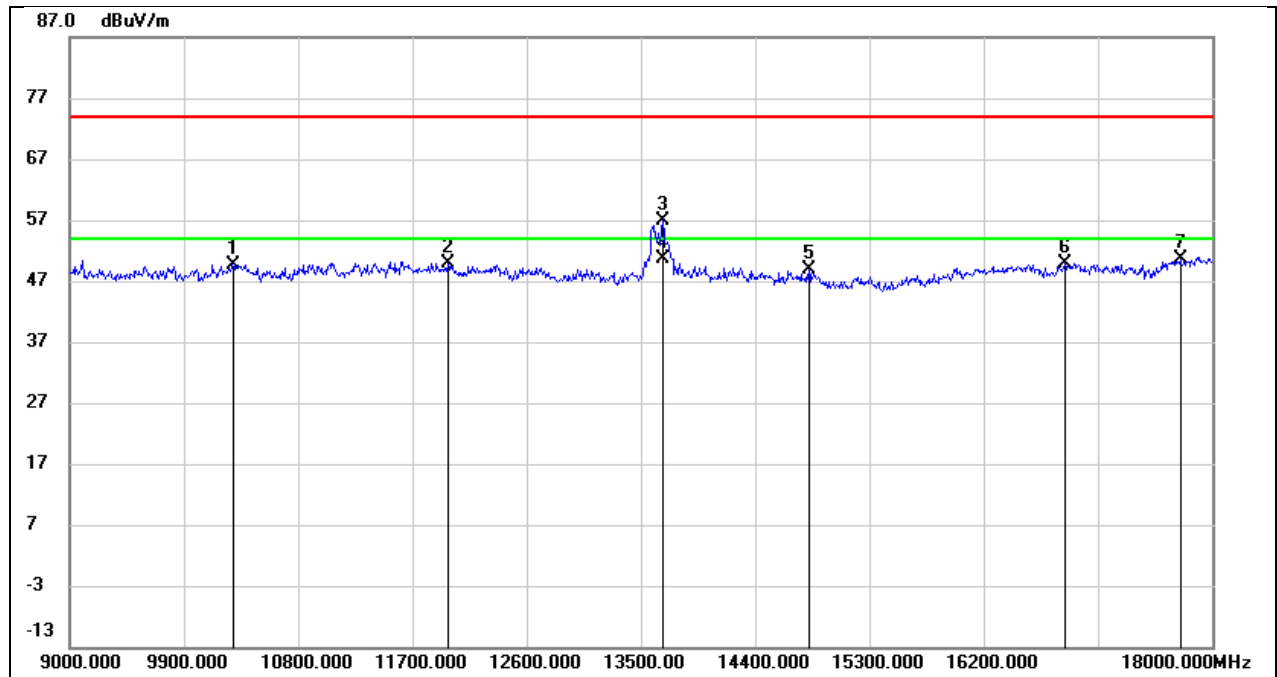


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10287.000	36.42	13.33	49.75	74.00	-24.25	peak
2	11979.000	32.25	17.66	49.91	74.00	-24.09	peak
3	13671.000	36.13	20.87	57.00	74.00	-17.00	peak
4	13671.000	29.75	20.87	50.62	54.00	-3.38	AVG
5	14823.000	28.55	20.22	48.77	74.00	-25.23	peak
6	16839.000	25.39	24.39	49.78	74.00	-24.22	peak
7	17748.000	24.87	25.78	50.65	74.00	-23.35	peak

Test Mode:	802.11be EHT160	Frequency(MHz):	6985
Polarity:	Horizontal	Test Voltage:	DC 5V

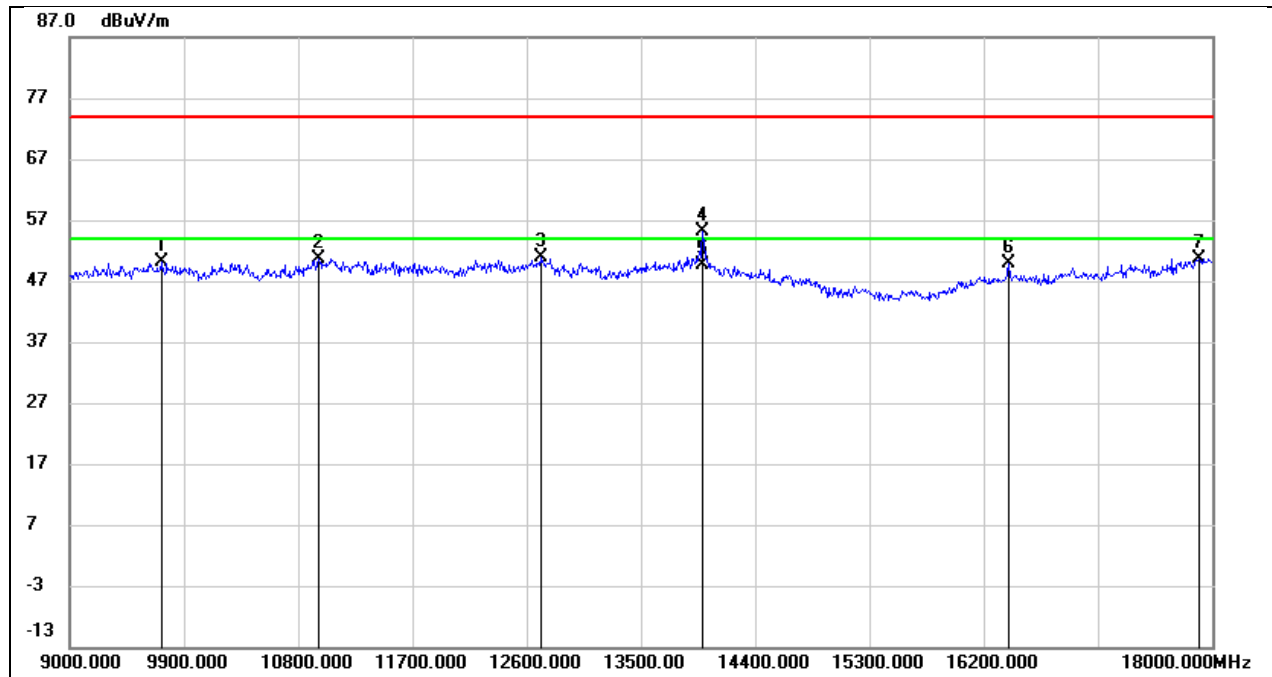

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9720.000	36.53	13.69	50.22	74.00	-23.78	peak
2	10962.000	35.22	15.36	50.58	74.00	-23.42	peak
3	12708.000	31.69	19.17	50.86	74.00	-23.14	peak
4	13986.000	31.83	23.21	55.04	74.00	-18.96	peak
5	13986.000	26.54	23.21	49.75	54.00	-4.25	AVG
6	16398.000	27.18	22.64	49.82	74.00	-24.18	peak
7	17901.000	22.41	28.26	50.67	74.00	-23.33	peak


Test Mode:	802.11be EHT160	Frequency(MHz):	6985
Polarity:	Vertical	Test Voltage:	DC 5V

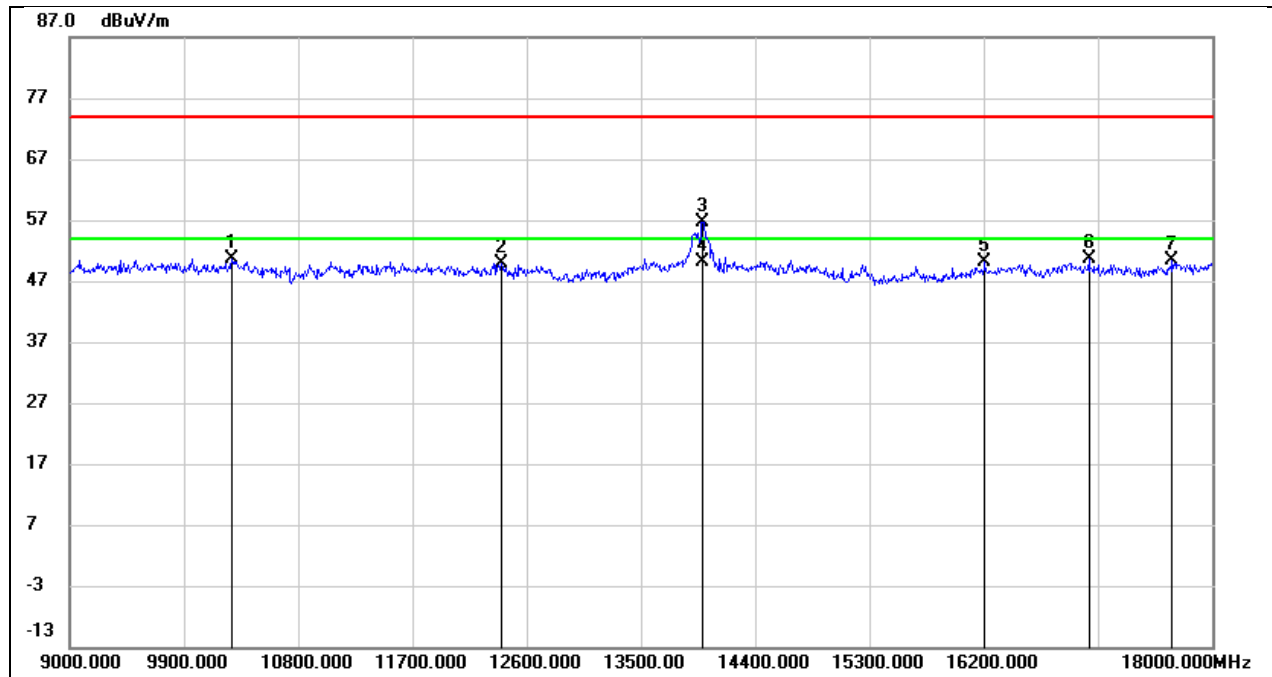

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10278.000	37.21	13.31	50.52	74.00	-23.48	peak
2	12402.000	31.93	17.94	49.87	74.00	-24.13	peak
3	13986.000	35.13	21.61	56.74	74.00	-17.26	peak
4	13986.000	28.59	21.61	50.20	54.00	-3.80	AVG
5	16209.000	25.34	24.73	50.07	74.00	-23.93	peak
6	17028.000	25.75	24.79	50.54	74.00	-23.46	peak
7	17685.000	24.97	25.52	50.49	74.00	-23.51	peak


8.6. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

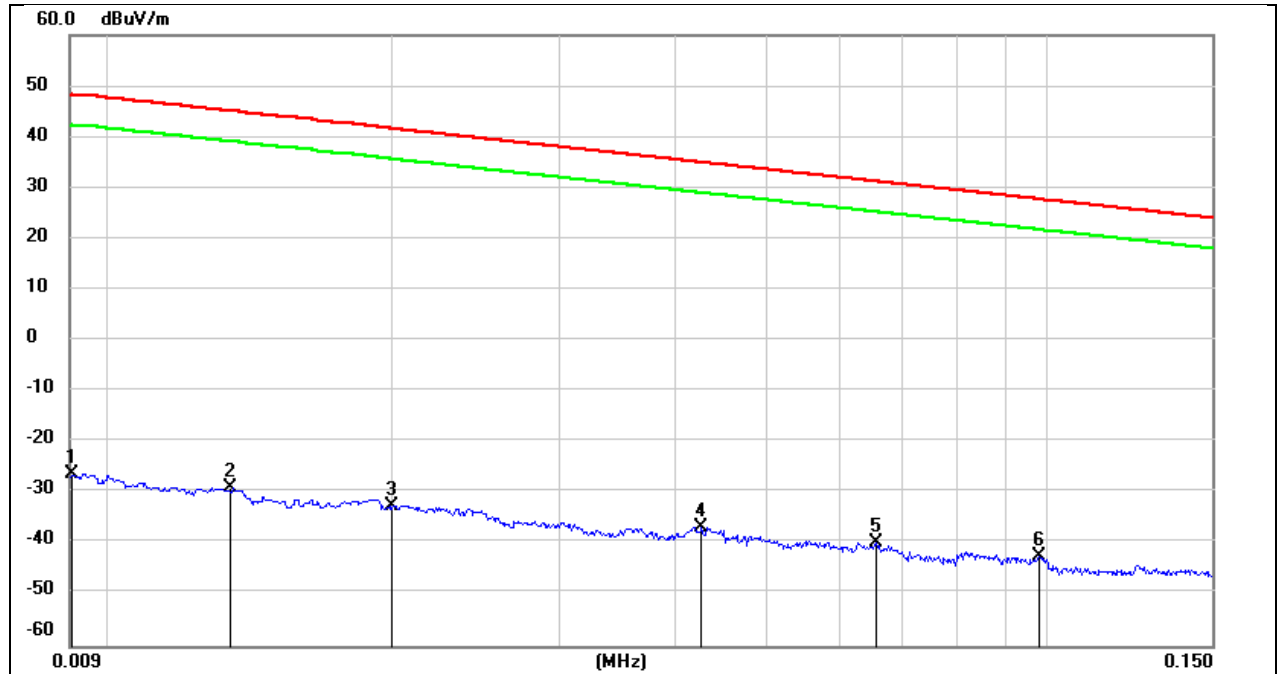


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0091	75.08	-101.33	-26.25	48.28	-77.75	-3.22	-74.53	peak
2	0.0134	72.34	-101.39	-29.05	45.06	-80.55	-6.44	-74.11	peak
3	0.0200	68.86	-101.34	-32.48	41.58	-83.98	-9.92	-74.06	peak
4	0.0427	64.64	-101.45	-36.81	34.99	-88.31	-16.51	-71.80	peak
5	0.0656	61.86	-101.55	-39.69	31.26	-91.19	-20.24	-70.95	peak
6	0.0981	59.27	-101.78	-42.51	27.77	-94.01	-23.73	-70.28	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

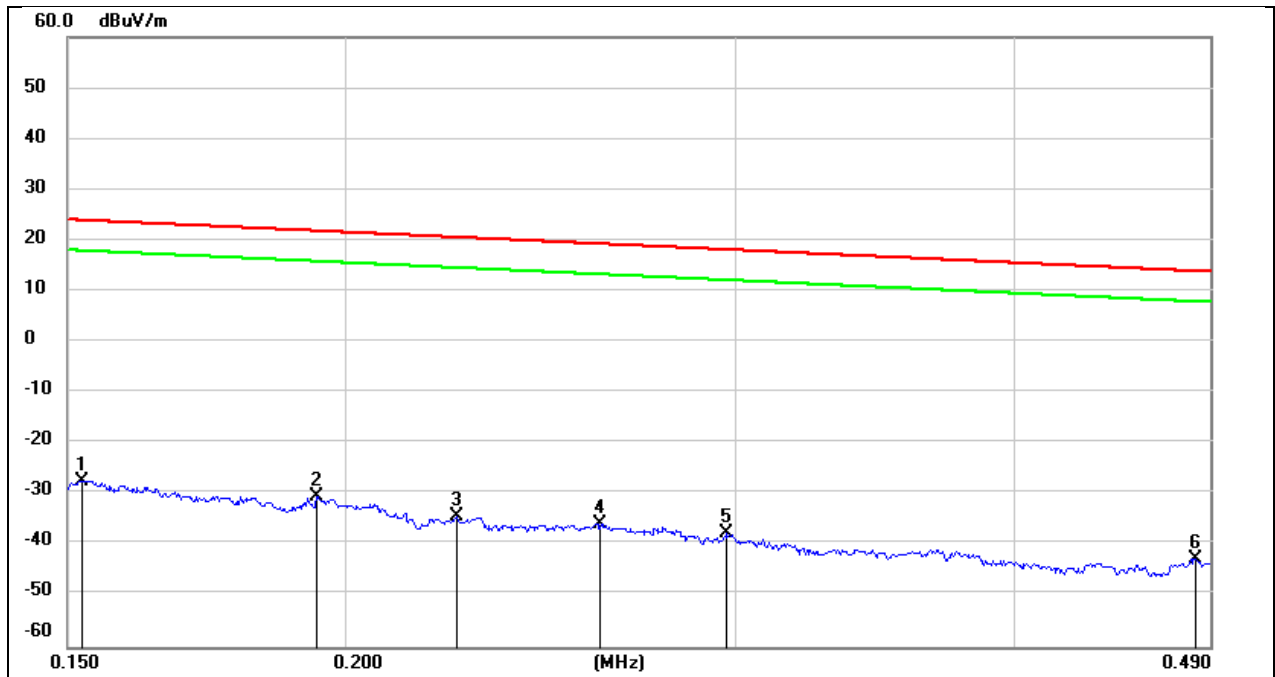

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1524	74.30	-101.63	-27.33	23.94	-78.83	-27.56	-51.27	peak
2	0.1942	71.31	-101.70	-30.39	21.84	-81.89	-29.66	-52.23	peak
3	0.2245	67.46	-101.75	-34.29	20.58	-85.79	-30.92	-54.87	peak
4	0.2605	66.10	-101.81	-35.71	19.28	-87.21	-32.22	-54.99	peak
5	0.2972	64.16	-101.85	-37.69	18.14	-89.19	-33.36	-55.83	peak
6	0.4823	59.19	-102.04	-42.85	13.94	-94.35	-37.56	-56.79	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

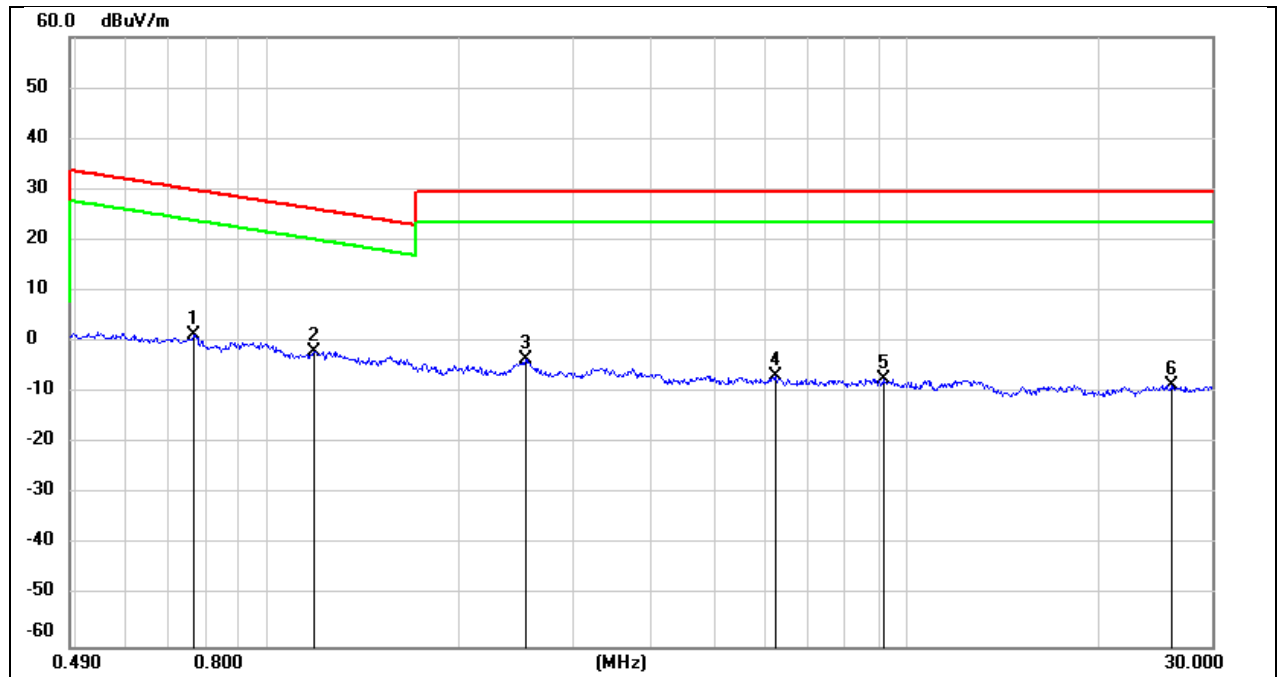

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7641	63.42	-62.12	1.30	29.94	-50.20	-21.56	-28.64	peak
2	1.1814	60.35	-62.19	-1.84	26.16	-53.34	-25.34	-28.00	peak
3	2.5301	58.32	-61.69	-3.37	29.54	-54.87	-21.96	-32.91	peak
4	6.2445	54.63	-61.32	-6.69	29.54	-58.19	-21.96	-36.23	peak
5	9.1951	53.57	-60.91	-7.34	29.54	-58.84	-21.96	-36.88	peak
6	25.8978	51.76	-60.36	-8.60	29.54	-60.10	-21.96	-38.14	peak


8.7. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

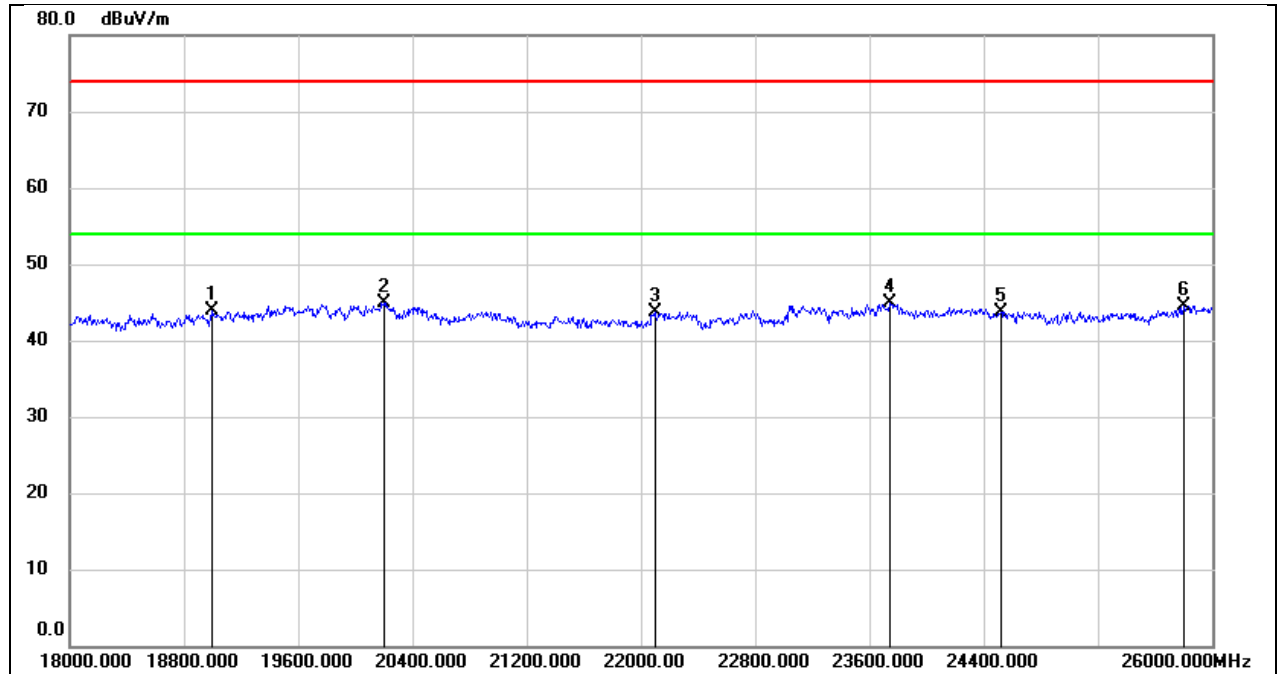

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19000.000	49.06	-5.22	43.84	74.00	-30.16	peak
2	20200.000	50.54	-5.58	44.96	74.00	-29.04	peak
3	22096.000	48.04	-4.38	43.66	74.00	-30.34	peak
4	23744.000	48.15	-3.20	44.95	74.00	-29.05	peak
5	24520.000	46.10	-2.33	43.77	74.00	-30.23	peak
6	25800.000	45.23	-0.70	44.53	74.00	-29.47	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 5V

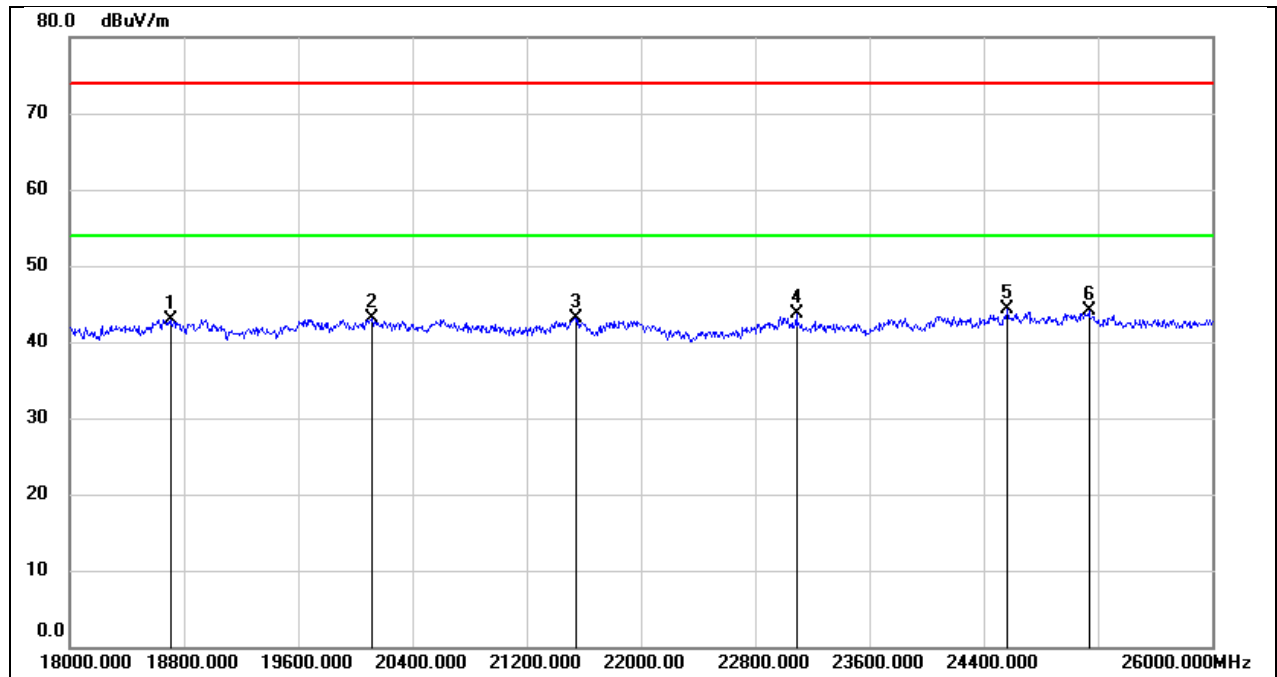

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	48.40	-5.40	43.00	74.00	-31.00	peak
2	20120.000	48.72	-5.53	43.19	74.00	-30.81	peak
3	21544.000	47.76	-4.63	43.13	74.00	-30.87	peak
4	23088.000	47.02	-3.41	43.61	74.00	-30.39	peak
5	24568.000	46.60	-2.33	44.27	74.00	-29.73	peak
6	25136.000	45.92	-1.87	44.05	74.00	-29.95	peak


8.8. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

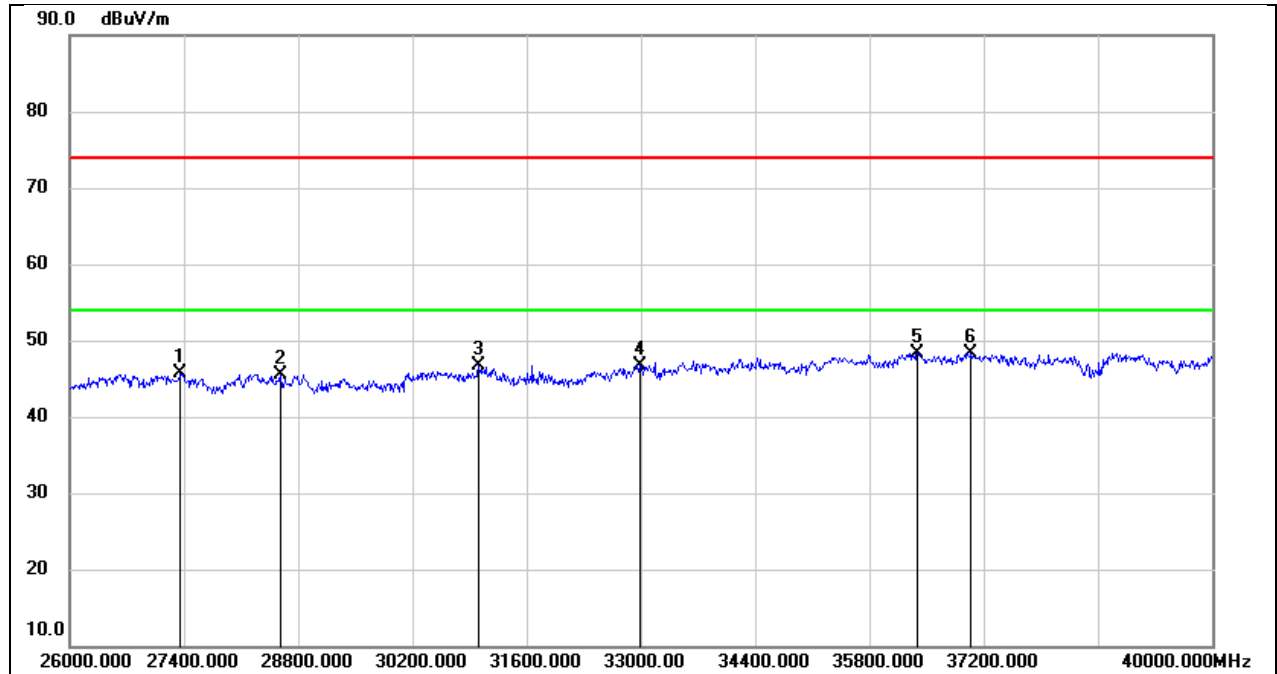

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	27358.000	49.73	-3.95	45.78	74.00	-28.22	peak
2	28576.000	47.62	-2.05	45.57	74.00	-28.43	peak
3	31012.000	47.33	-0.71	46.62	74.00	-27.38	peak
4	32986.000	47.49	-0.69	46.80	74.00	-27.20	peak
5	36388.000	44.75	3.52	48.27	74.00	-25.73	peak
6	37046.000	45.09	3.21	48.30	74.00	-25.70	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Vertical	Test Voltage:	DC 5V

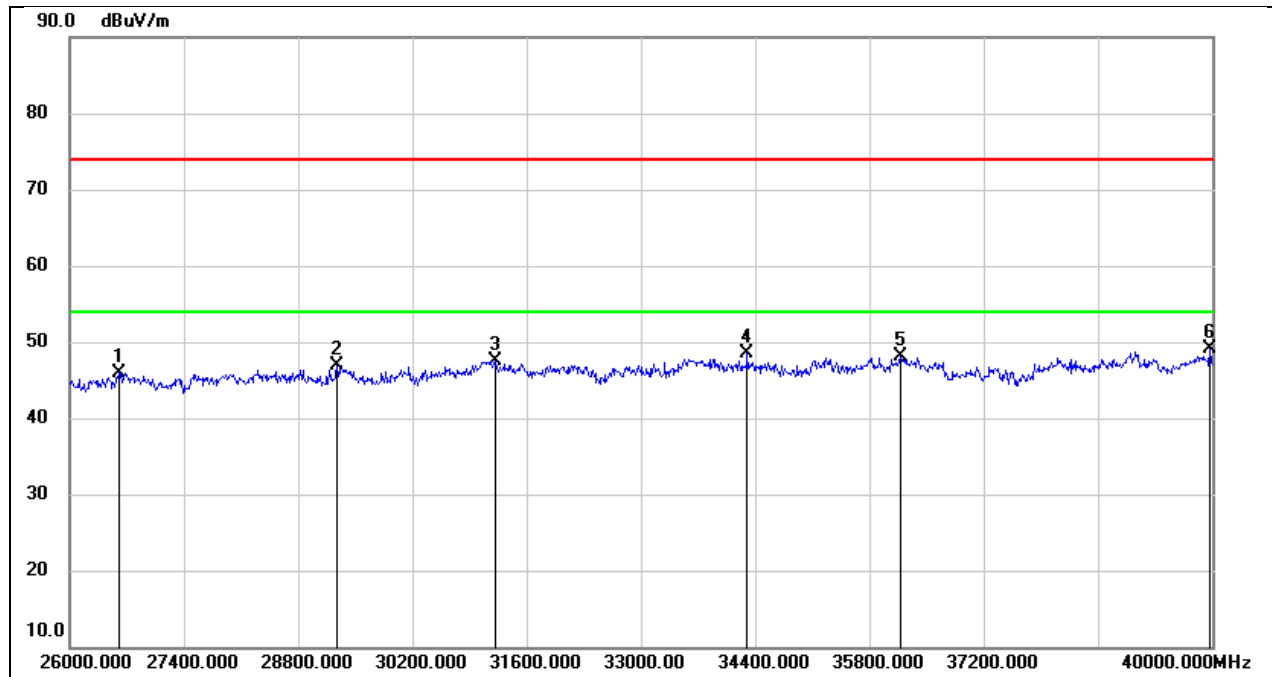

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26602.000	50.78	-4.80	45.98	74.00	-28.02	peak
2	29276.000	48.01	-1.01	47.00	74.00	-27.00	peak
3	31208.000	48.38	-0.80	47.58	74.00	-26.42	peak
4	34302.000	47.45	1.10	48.55	74.00	-25.45	peak
5	36178.000	44.53	3.48	48.01	74.00	-25.99	peak
6	39972.000	43.95	5.13	49.08	74.00	-24.92	peak


8.9. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

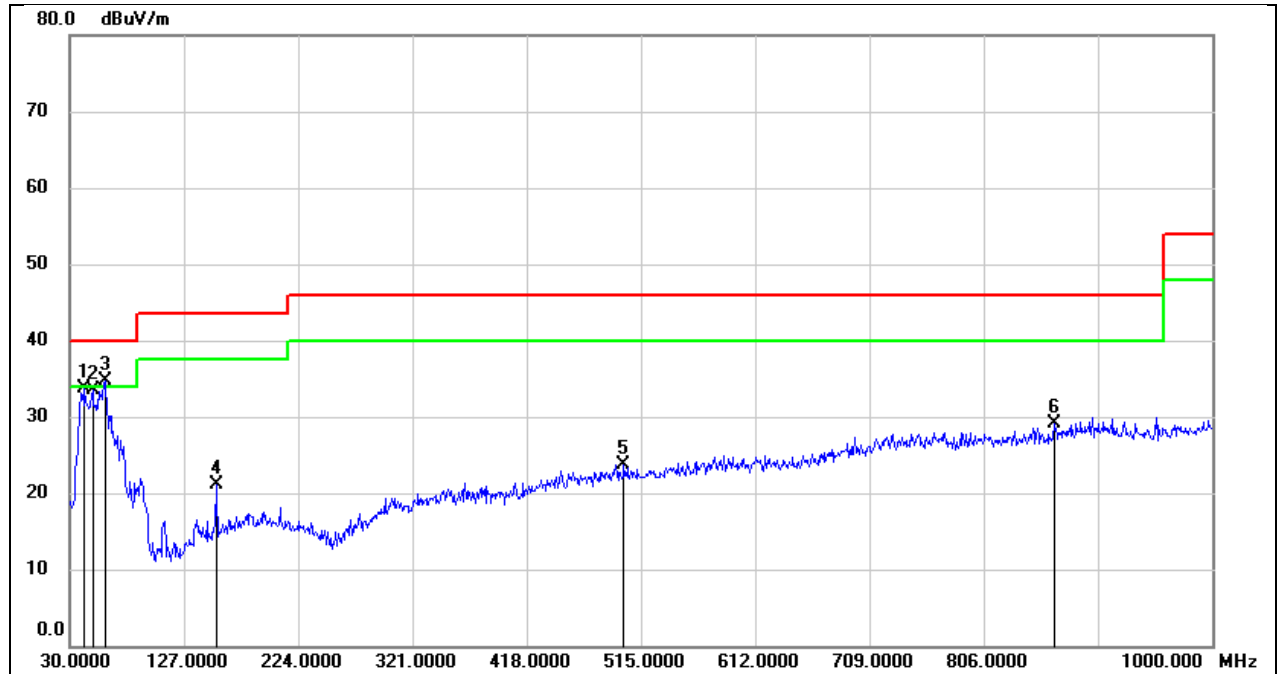

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	42.6100	48.23	-14.50	33.73	40.00	-6.27	QP
2	49.4000	48.29	-14.86	33.43	40.00	-6.57	QP
3	60.0700	49.87	-15.22	34.65	40.00	-5.35	QP
4	154.1600	33.53	-12.34	21.19	43.50	-22.31	QP
5	500.4500	29.86	-6.21	23.65	46.00	-22.35	QP
6	866.1400	29.66	-0.63	29.03	46.00	-16.97	QP

Test Mode:	802.11ax HE20	Frequency(MHz):	5955
Polarity:	Horizontal	Test Voltage:	DC 5V

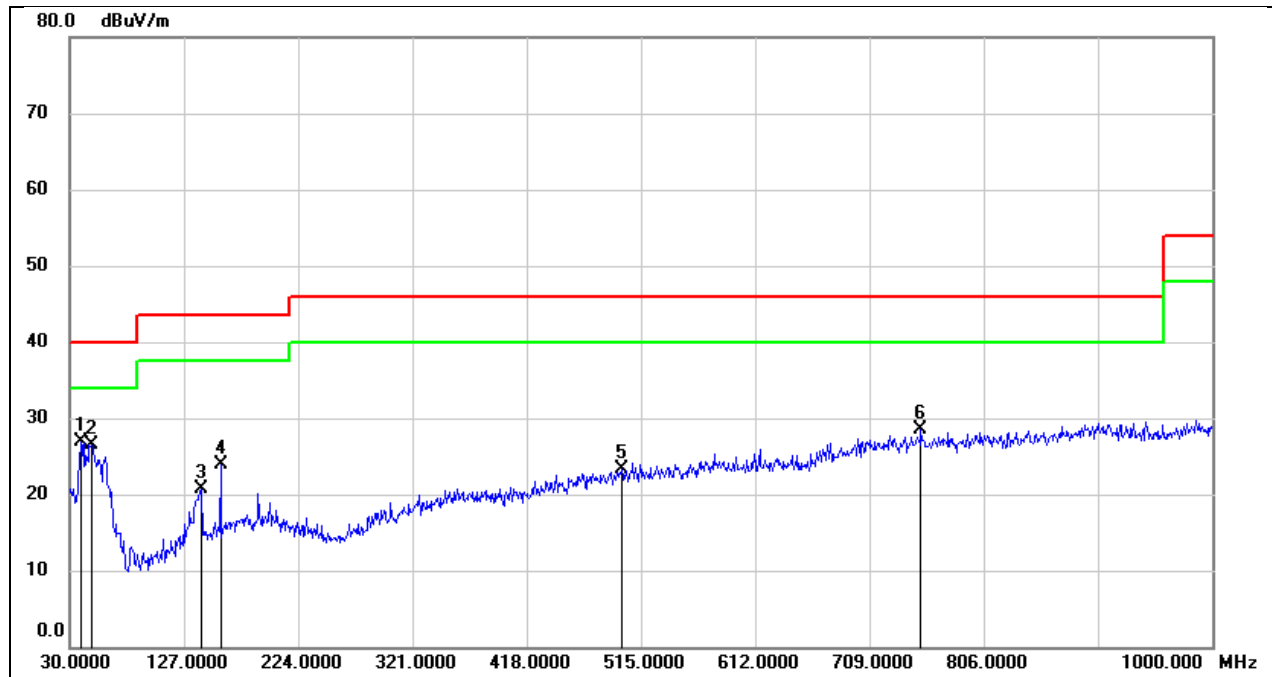

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	41.35	-14.36	26.99	40.00	-13.01	QP
2	48.4300	41.36	-14.81	26.55	40.00	-13.45	QP
3	141.5500	33.98	-13.36	20.62	43.50	-22.88	QP
4	158.0399	36.00	-12.10	23.90	43.50	-19.60	QP
5	498.5100	29.56	-6.24	23.32	46.00	-22.68	QP
6	752.6500	29.67	-1.17	28.50	46.00	-17.50	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

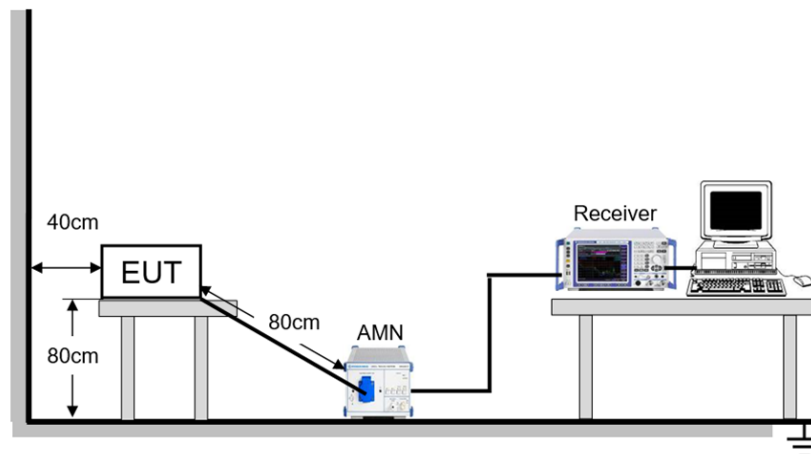

TEST ENVIRONMENT


Temperature	22.5°C	Relative Humidity	52.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	December 25, 2024	Test By	Johnson Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11ax20	Frequency(MHz):	5955
Line:	Line		

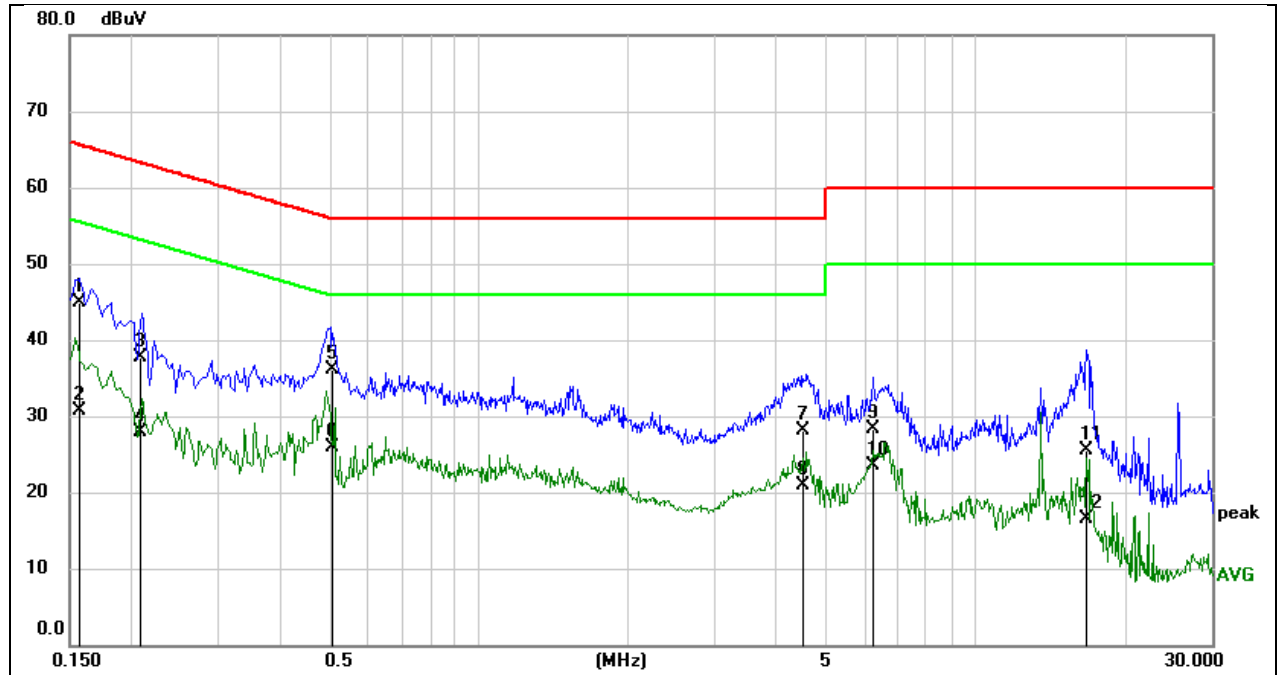


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1569	35.22	9.64	44.86	65.63	-20.77	QP
2	0.1569	21.03	9.64	30.67	55.63	-24.96	AVG
3	0.2076	28.11	9.64	37.75	63.30	-25.55	QP
4	0.2076	18.20	9.64	27.84	53.30	-25.46	AVG
5	0.5063	26.37	9.64	36.01	56.00	-19.99	QP
6	0.5063	16.26	9.64	25.90	46.00	-20.10	AVG
7	4.5023	18.53	9.65	28.18	56.00	-27.82	QP
8	4.5023	11.21	9.65	20.86	46.00	-25.14	AVG
9	6.2705	18.51	9.71	28.22	60.00	-31.78	QP
10	6.2705	13.80	9.71	23.51	50.00	-26.49	AVG
11	16.7274	15.78	9.74	25.52	60.00	-34.48	QP
12	16.7274	6.86	9.74	16.60	50.00	-33.40	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11ax20	Frequency(MHz):	5955
Line:	Neutral		

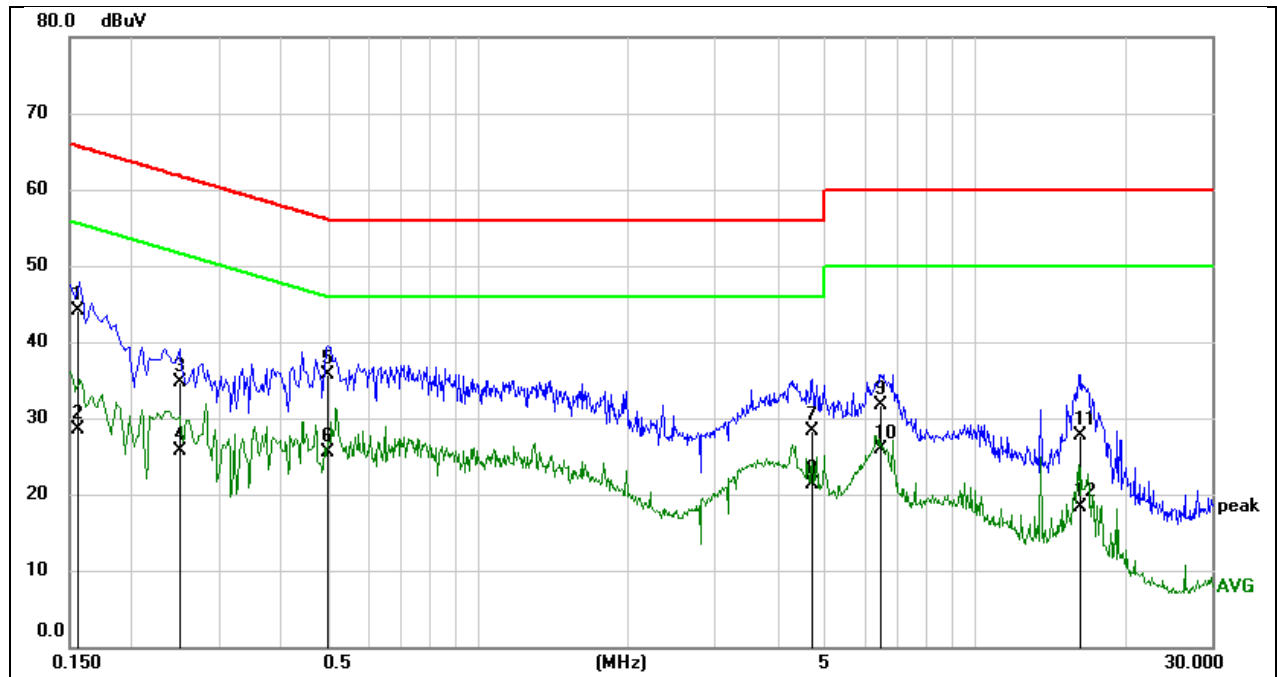

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1556	34.37	9.64	44.01	65.70	-21.69	QP
2	0.1556	18.93	9.64	28.57	55.70	-27.13	AVG
3	0.2493	25.11	9.64	34.75	61.78	-27.03	QP
4	0.2493	16.01	9.64	25.65	51.78	-26.13	AVG
5	0.4992	26.04	9.64	35.68	56.01	-20.33	QP
6	0.4992	15.85	9.64	25.49	46.01	-20.52	AVG
7	4.7154	18.65	9.65	28.30	56.00	-27.70	QP
8	4.7154	11.74	9.65	21.39	46.00	-24.61	AVG
9	6.4580	21.93	9.71	31.64	60.00	-28.36	QP
10	6.4580	16.14	9.71	25.85	50.00	-24.15	AVG
11	16.4048	17.94	9.74	27.68	60.00	-32.32	QP
12	16.4048	8.62	9.74	18.36	50.00	-31.64	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result-6ID

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant0	5975	18.20	5965.92	5984.12
	Ant0	6135	18.16	6125.92	6144.08
	Ant0	6375	18.12	6365.96	6384.08
	Ant0	6455	18.20	6445.84	6464.04
	Ant0	6535	18.24	6525.88	6544.12
	Ant0	6695	18.24	6685.92	6704.16
	Ant0	6855	18.20	6845.88	6864.08
	Ant0	6935	18.16	6925.92	6944.08
	Ant0	7015	18.20	7005.92	7024.12
	Ant0	7095	18.16	7085.96	7104.12
11AX20	Ant0	5955	19.80	5945.08	5964.88
	Ant0	6175	19.76	6165.08	6184.84
	Ant0	6415	19.72	6405.12	6424.84
	Ant0	6435	19.76	6425.12	6444.88
	Ant0	6475	19.76	6465.12	6484.88
	Ant0	6515	19.72	6505.12	6524.84
	Ant0	6535	19.76	6525.12	6544.88
	Ant0	6715	19.80	6705.08	6724.88
	Ant0	6855	19.72	6845.16	6864.88
	Ant0	6875	19.72	6865.16	6884.88
	Ant0	7015	19.68	7005.16	7024.84
	Ant0	7115	19.72	7105.16	7124.88
11AX40	Ant0	5965	39.36	5945.32	5984.68
	Ant0	6165	39.36	6145.32	6184.68
	Ant0	6405	39.28	6385.40	6424.68
	Ant0	6445	39.28	6425.40	6464.68
	Ant0	6485	39.36	6465.32	6504.68
	Ant0	6525	39.36	6505.32	6544.68
	Ant0	6565	39.20	6545.40	6584.60
	Ant0	6685	39.36	6665.40	6704.76
	Ant0	6845	39.28	6825.40	6864.68
	Ant0	6885	39.28	6865.32	6904.60
	Ant0	7005	39.28	6985.40	7024.68
	Ant0	7085	39.28	7065.32	7104.60
11AX80	Ant0	5985	79.68	5945.16	6024.84
	Ant0	6145	79.68	6105.16	6184.84
	Ant0	6385	79.68	6345.16	6424.84
	Ant0	6465	79.68	6425.16	6504.84


	Ant0	6545	79.68	6505.16	6584.84
	Ant0	6705	79.52	6665.32	6744.84
	Ant0	6785	79.68	6745.16	6824.84
	Ant0	6865	79.68	6825.16	6904.84
	Ant0	6945	79.68	6905.16	6984.84
	Ant0	7025	79.68	6985.16	7064.84
11AX160	Ant0	6025	161.920	5944.040	6105.960
	Ant0	6185	161.280	6104.360	6265.640
	Ant0	6345	161.600	6264.360	6425.960
	Ant0	6505	161.920	6424.040	6585.960
	Ant0	6665	161.600	6584.360	6745.960
	Ant0	6825	161.600	6744.040	6905.640
	Ant0	6985	161.600	6904.040	7065.640
11BE20	Ant0	5955	19.76	5945.12	5964.88
	Ant0	6175	19.76	6165.12	6184.88
	Ant0	6415	19.80	6405.12	6424.92
	Ant0	6435	19.80	6425.08	6444.88
	Ant0	6475	19.76	6465.12	6484.88
	Ant0	6515	19.80	6505.12	6524.92
	Ant0	6535	19.72	6525.12	6544.84
	Ant0	6715	19.80	6705.08	6724.88
	Ant0	6855	19.80	6845.12	6864.92
	Ant0	6875	19.80	6865.12	6884.92
	Ant0	7015	19.76	7005.12	7024.88
	Ant0	7115	19.84	7105.08	7124.92
11BE40	Ant0	5965	39.36	5945.24	5984.60
	Ant0	6165	39.36	6145.40	6184.76
	Ant0	6405	39.36	6385.32	6424.68
	Ant0	6445	39.36	6425.32	6464.68
	Ant0	6485	39.36	6465.40	6504.76
	Ant0	6525	39.28	6505.40	6544.68
	Ant0	6565	39.20	6545.40	6584.60
	Ant0	6725	39.36	6705.32	6744.68
	Ant0	6845	39.36	6825.32	6864.68
	Ant0	6885	39.36	6865.32	6904.68
	Ant0	7005	39.36	6985.32	7024.68
	Ant0	7085	39.36	7065.32	7104.68
11BE80	Ant0	5985	79.68	5945.16	6024.84
	Ant0	6145	79.68	6105.16	6184.84
	Ant0	6385	79.68	6345.16	6424.84
	Ant0	6465	79.68	6425.16	6504.84
	Ant0	6545	79.68	6505.16	6584.84
	Ant0	6705	79.68	6665.16	6744.84
	Ant0	6785	79.52	6745.32	6824.84
	Ant0	6865	79.68	6825.16	6904.84
	Ant0	6945	79.52	6905.32	6984.84

	Ant0	7025	79.68	6985.16	7064.84
11BE160	Ant0	6025	161.920	5944.040	6105.960
	Ant0	6185	161.600	6104.040	6265.640
	Ant0	6345	161.280	6264.360	6425.640
	Ant0	6505	161.920	6424.040	6585.960
	Ant0	6665	161.920	6584.040	6745.960
	Ant0	6825	161.600	6744.040	6905.640
	Ant0	6985	161.600	6904.040	7065.640

Note: All the modes and antennas had been tested, but only the worst data were recorded in the report.

11.1.2. Test Graphs-6ID




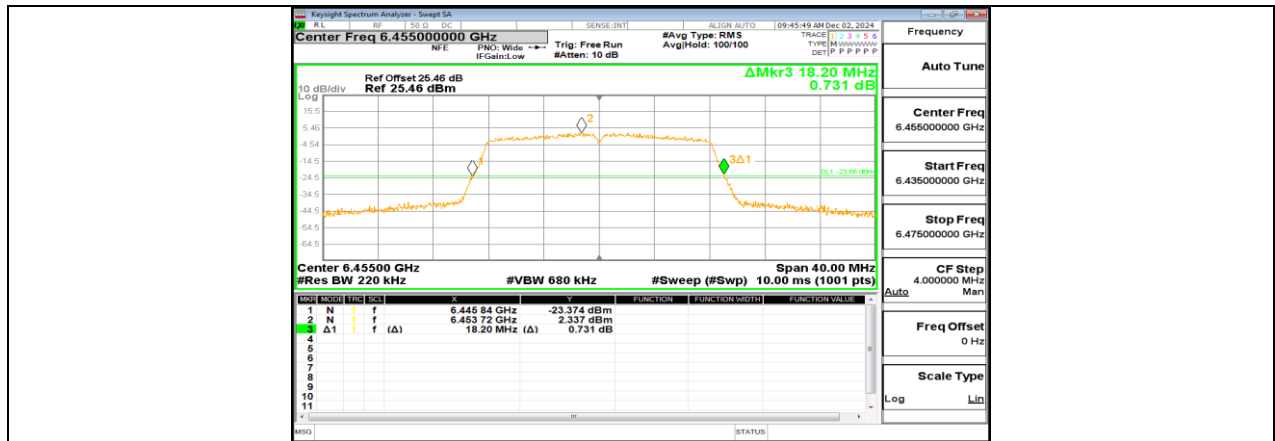

11A Ant0 6455




11A Ant0 6535

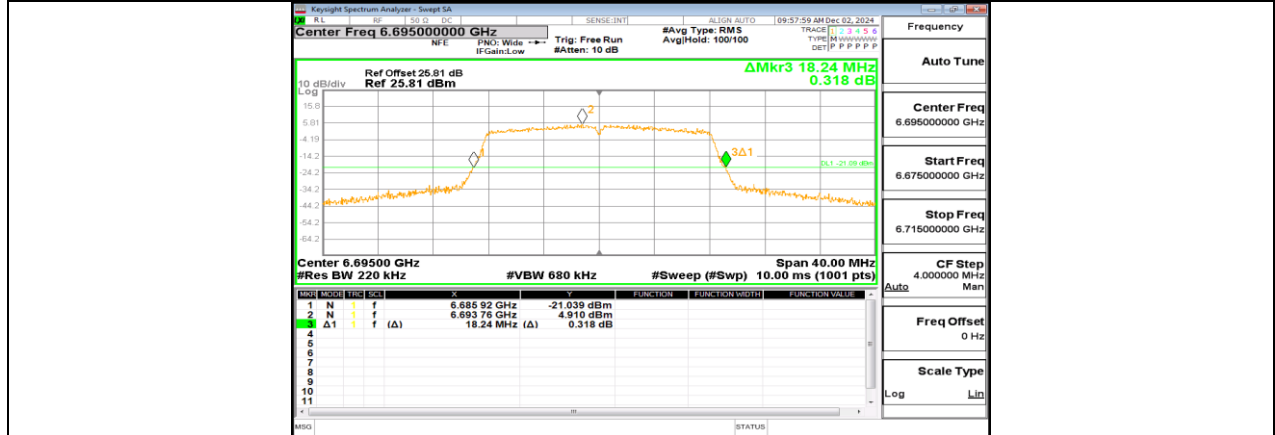


11A Ant0 6695




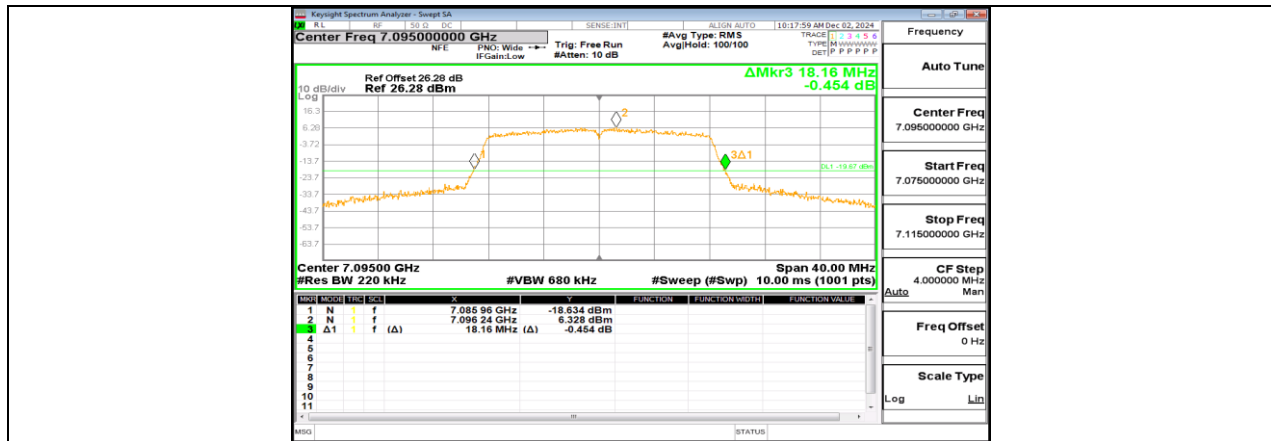

11A Ant0 7095

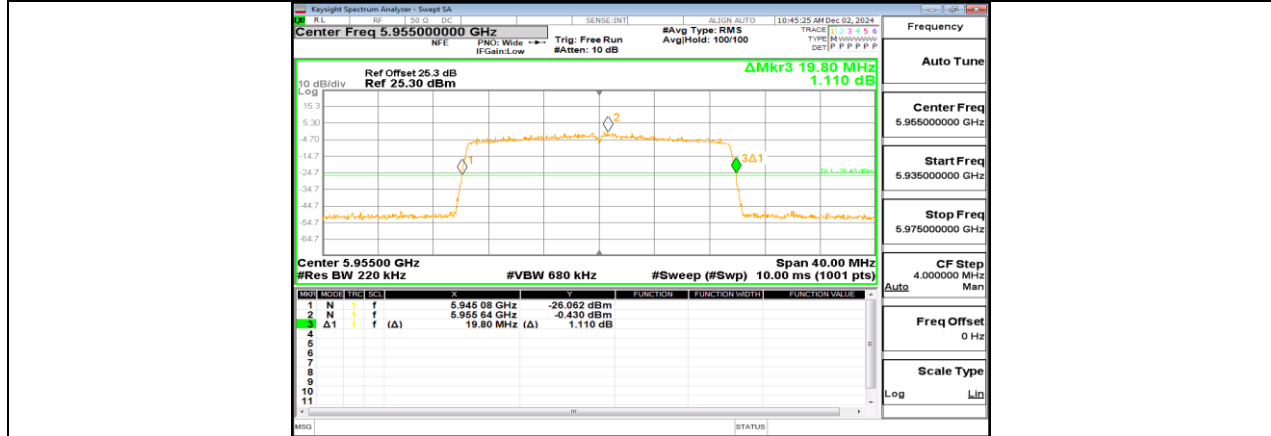

11AX20 Ant0 5955

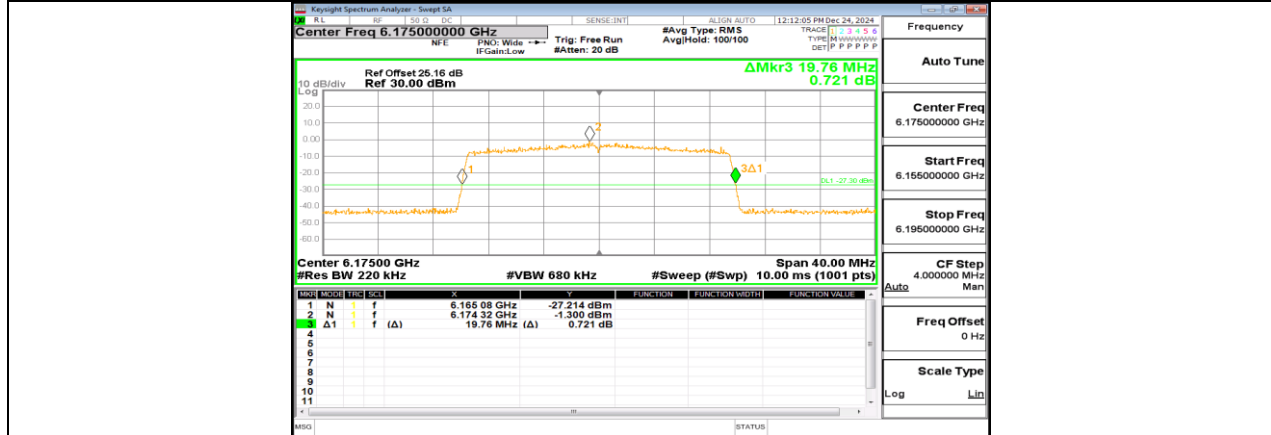

11AX20 Ant0 6175















