



Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

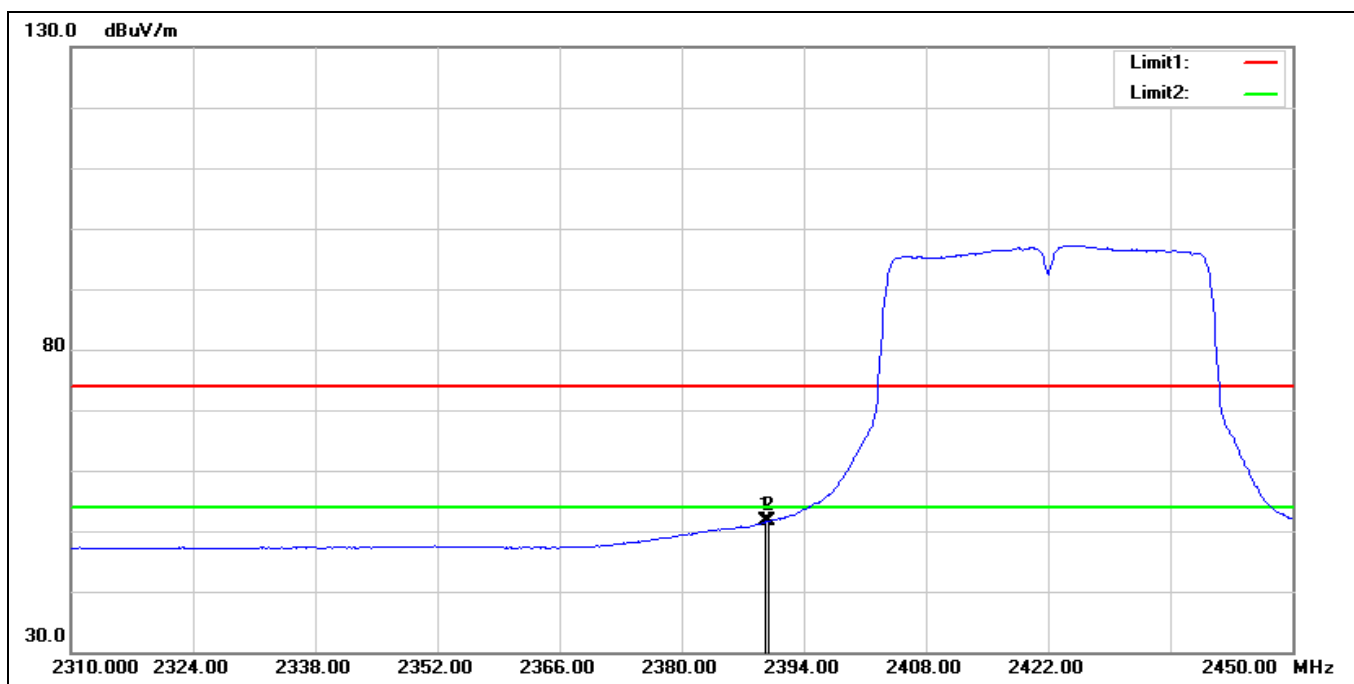


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	57.60	-6.09	51.51	54.00	-2.49	AVG
2*	2390.000	57.69	-6.09	51.60	54.00	-2.40	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

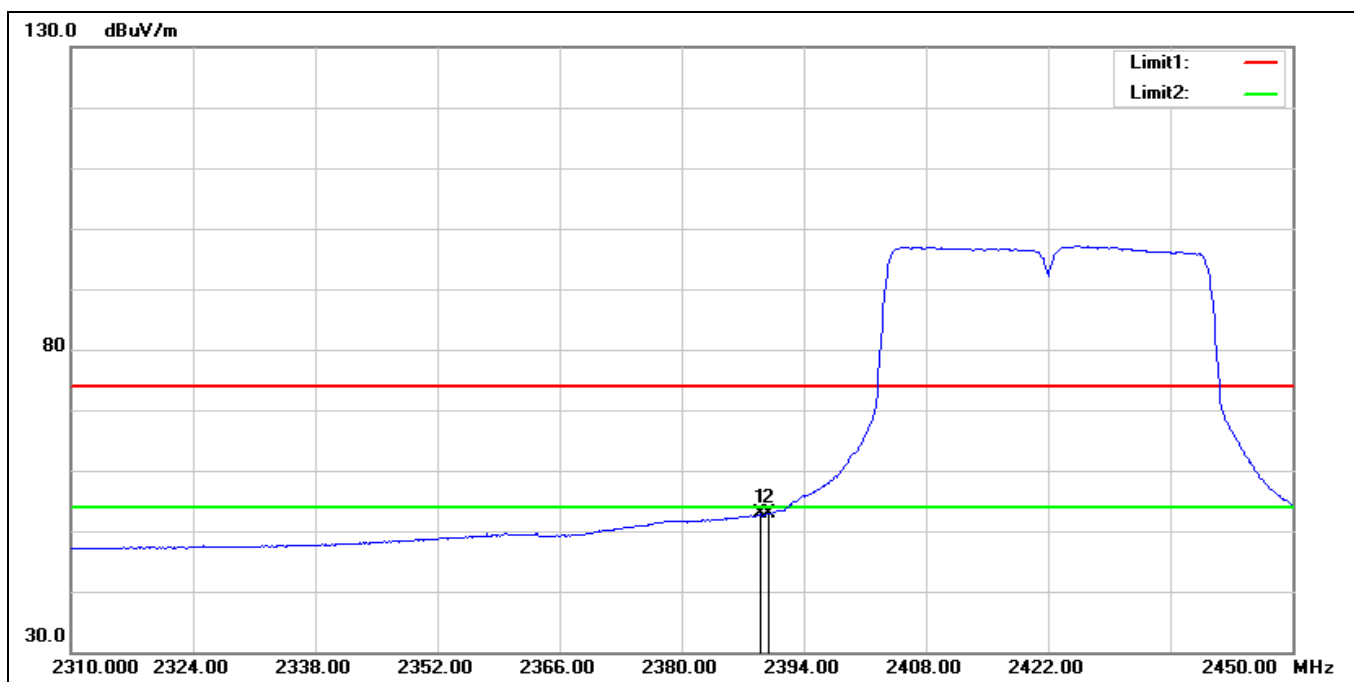


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.100	58.98	-6.08	52.90	54.00	-1.10	AVG
2	2390.000	58.94	-6.09	52.85	54.00	-1.15	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

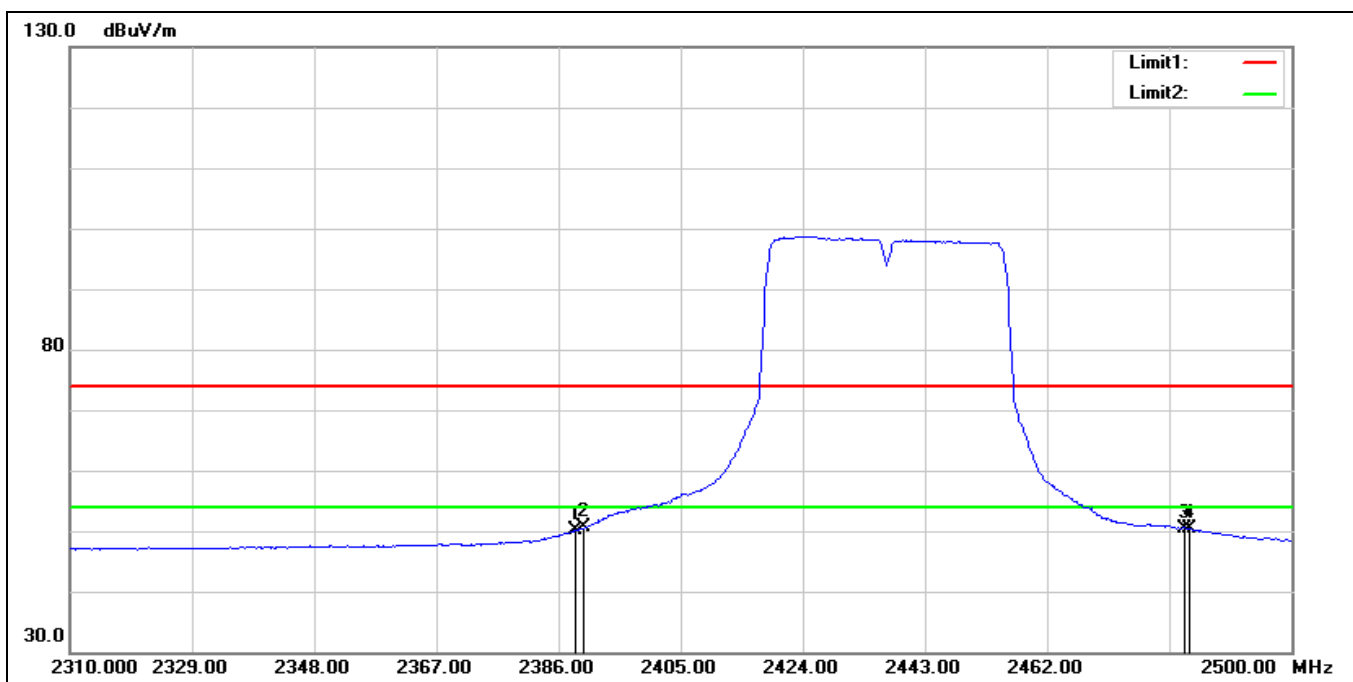


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.660	56.32	-6.08	50.24	54.00	-3.76	AVG
2*	2390.000	56.63	-6.09	50.54	54.00	-3.46	AVG
3	2483.500	56.61	-6.13	50.48	54.00	-3.52	AVG
4	2484.230	56.49	-6.14	50.35	54.00	-3.65	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

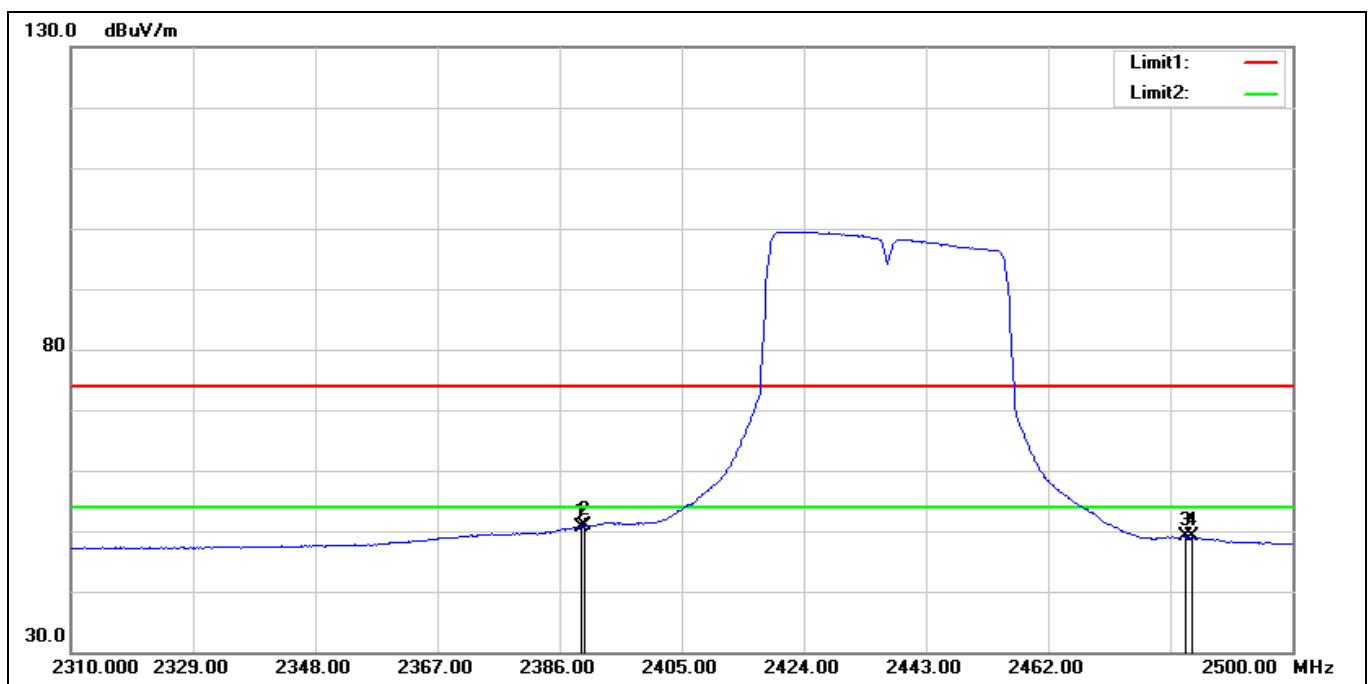


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	56.82	-6.09	50.73	54.00	-3.27	AVG
2*	2390.000	57.06	-6.09	50.97	54.00	-3.03	AVG
3	2483.500	55.15	-6.13	49.02	54.00	-4.98	AVG
4	2484.420	55.22	-6.14	49.08	54.00	-4.92	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

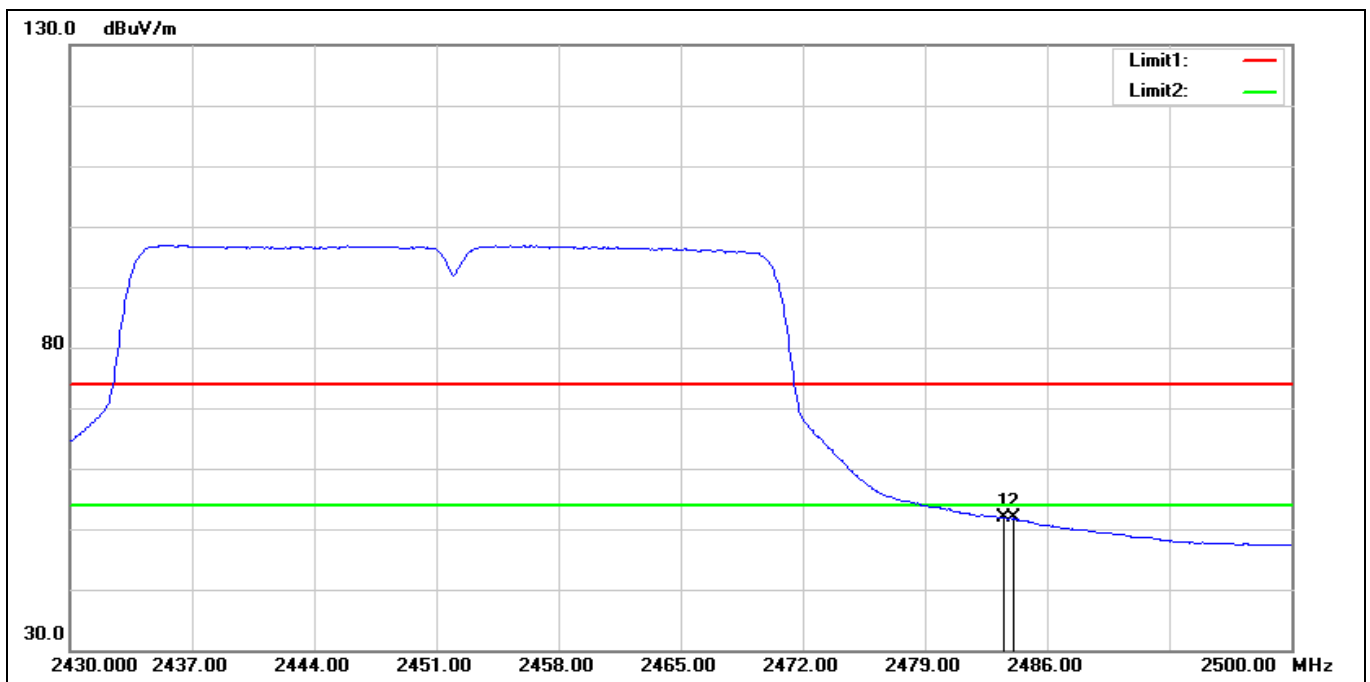


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	57.99	-6.13	51.86	54.00	-2.14	AVG
2	2484.040	57.92	-6.13	51.79	54.00	-2.21	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

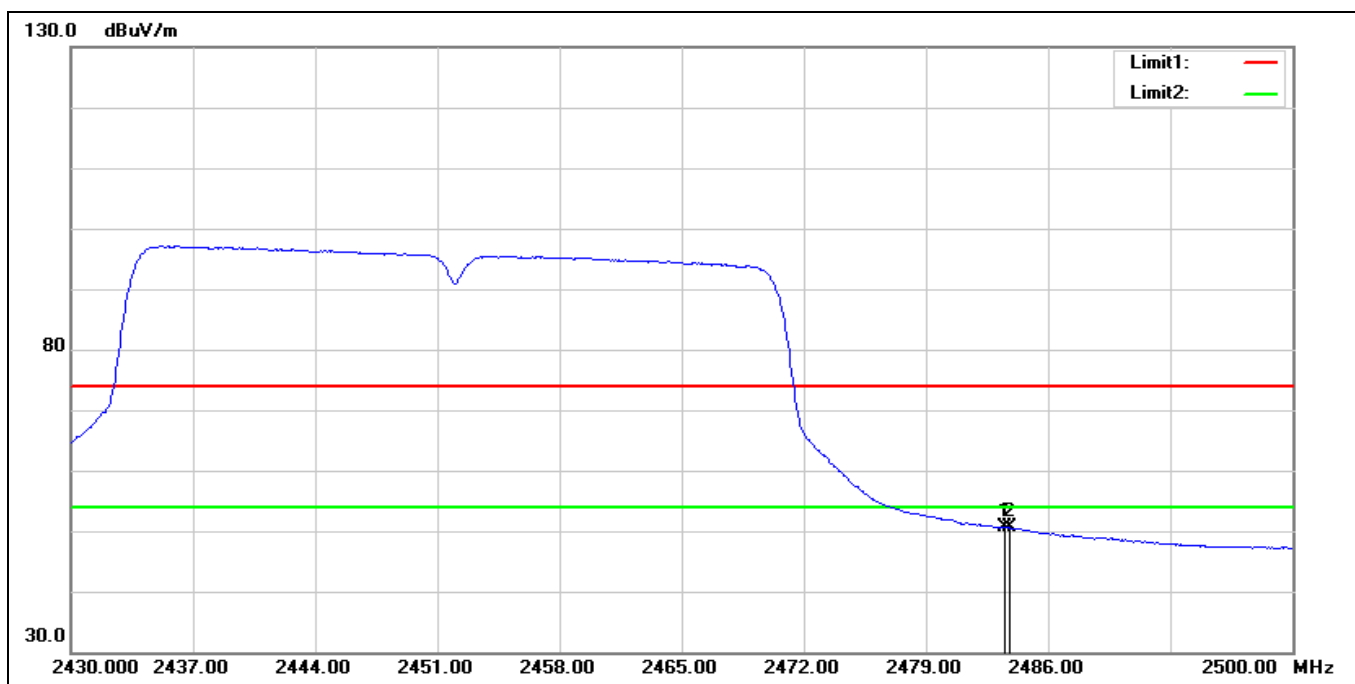


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	56.71	-6.13	50.58	54.00	-3.42	AVG
2	2483.830	56.67	-6.13	50.54	54.00	-3.46	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

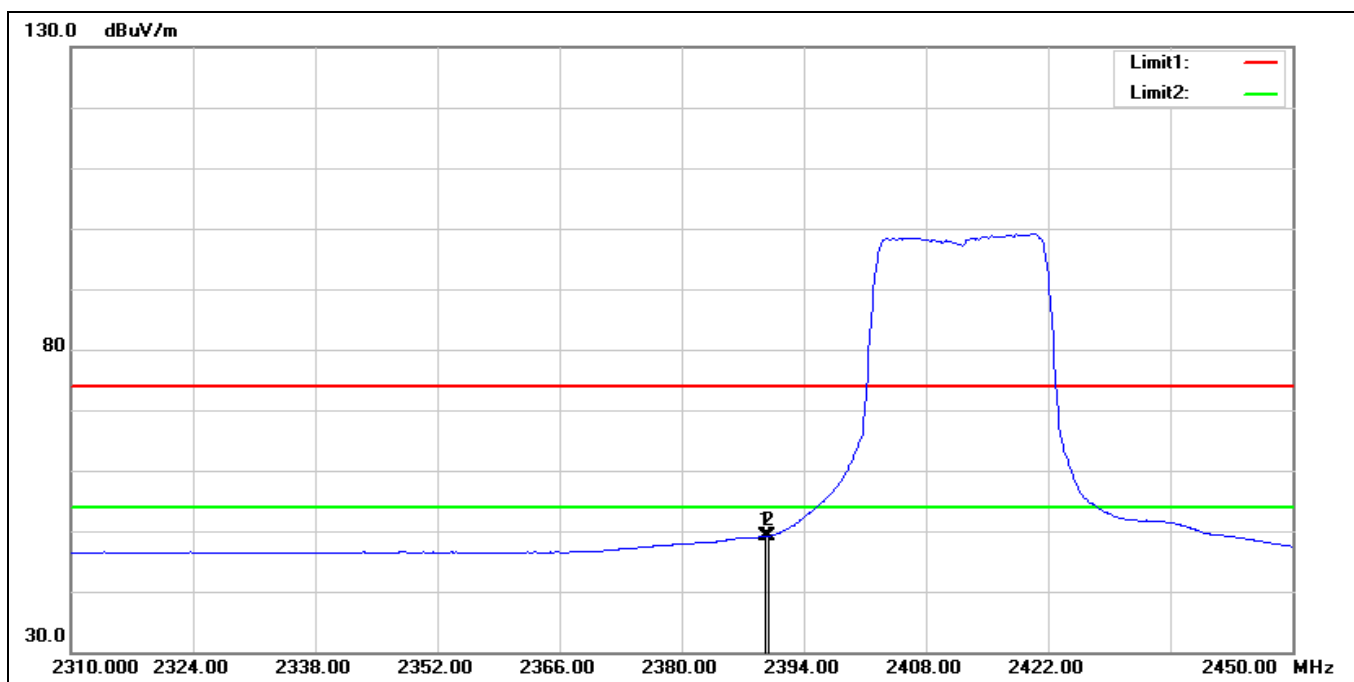


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	55.22	-6.09	49.13	54.00	-4.87	AVG
2*	2390.000	55.29	-6.09	49.20	54.00	-4.80	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

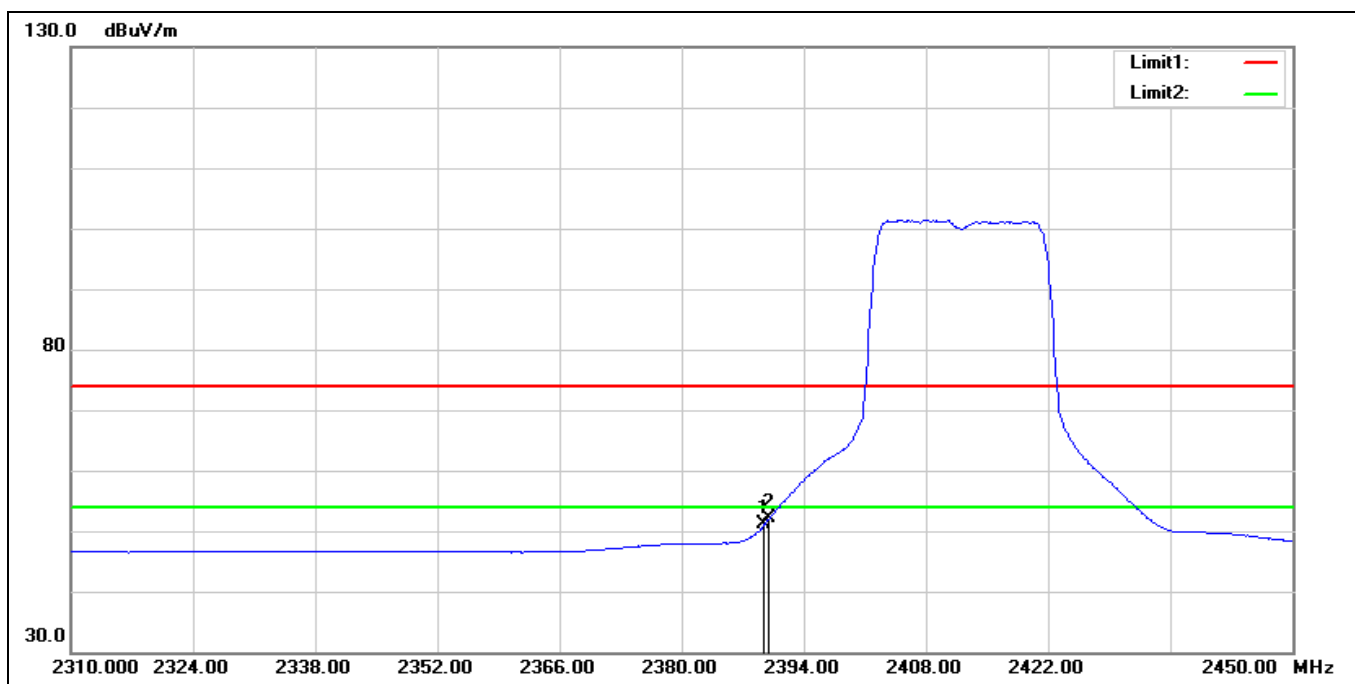


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	57.23	-6.09	51.14	54.00	-2.86	AVG
2*	2390.000	58.26	-6.09	52.17	54.00	-1.83	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

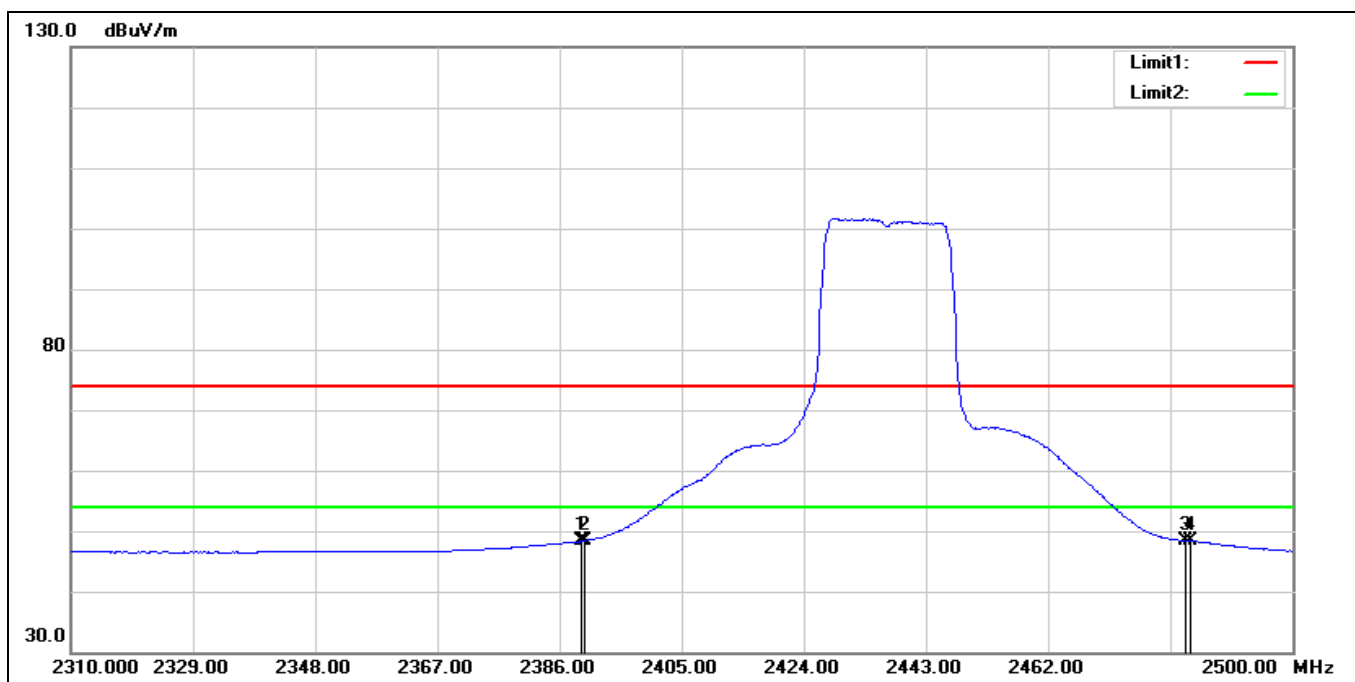


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	54.41	-6.09	48.32	54.00	-5.68	AVG
2*	2390.000	54.59	-6.09	48.50	54.00	-5.50	AVG
3	2483.500	54.53	-6.13	48.40	54.00	-5.60	AVG
4	2484.230	54.53	-6.14	48.39	54.00	-5.61	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

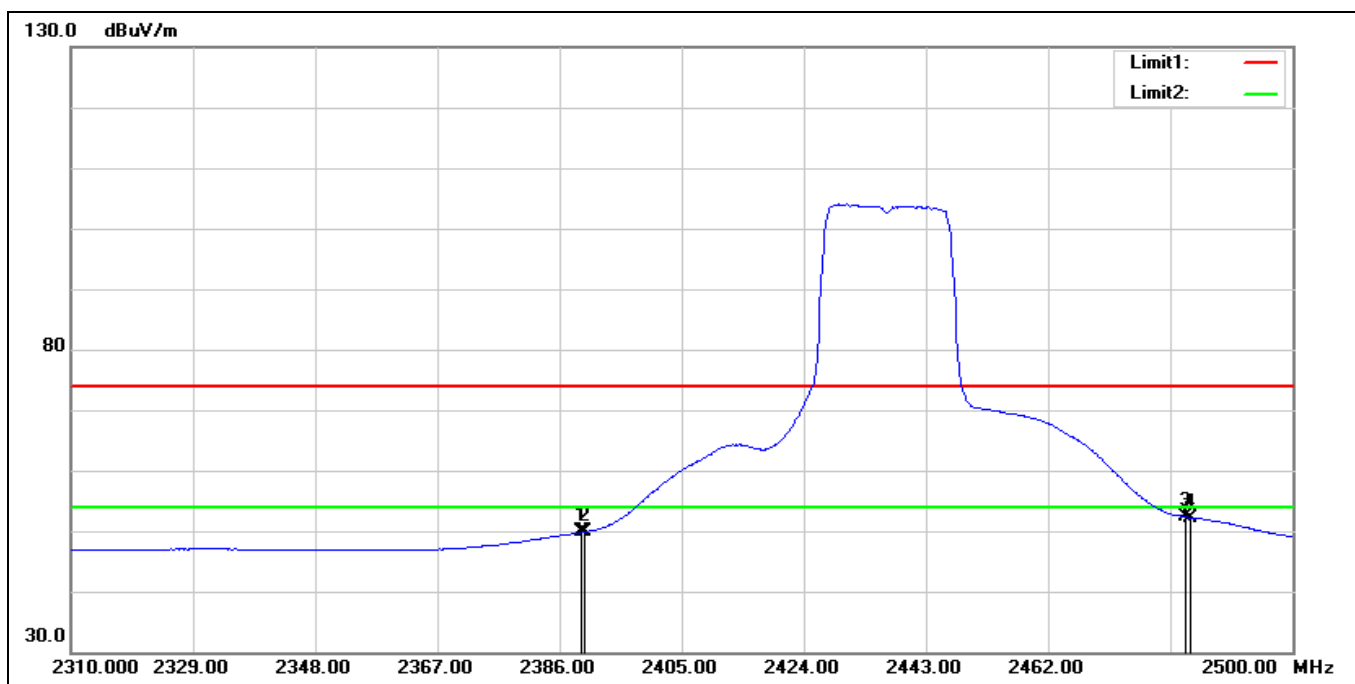


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	55.87	-6.09	49.78	54.00	-4.22	AVG
2	2390.000	56.02	-6.09	49.93	54.00	-4.07	AVG
3*	2483.500	58.39	-6.13	52.26	54.00	-1.74	AVG
4	2484.230	58.32	-6.14	52.18	54.00	-1.82	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

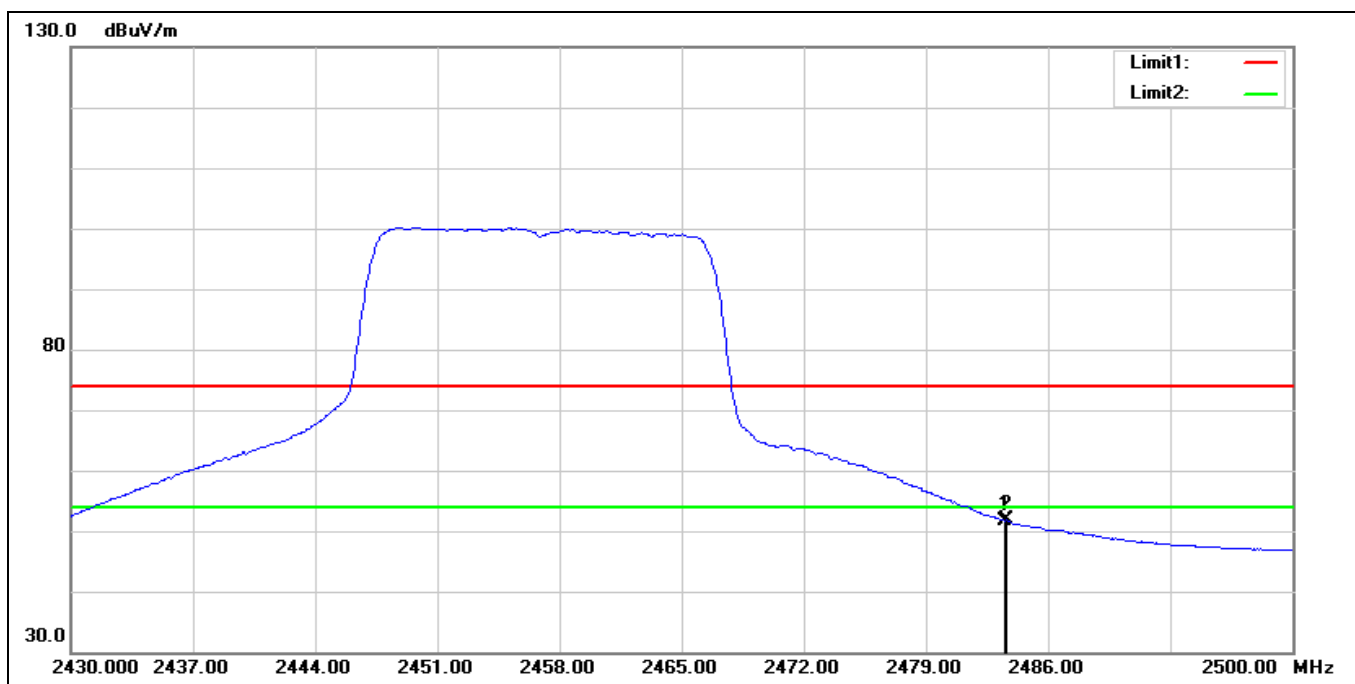


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.84	-6.13	51.71	54.00	-2.29	AVG
2*	2483.620	57.90	-6.13	51.77	54.00	-2.23	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

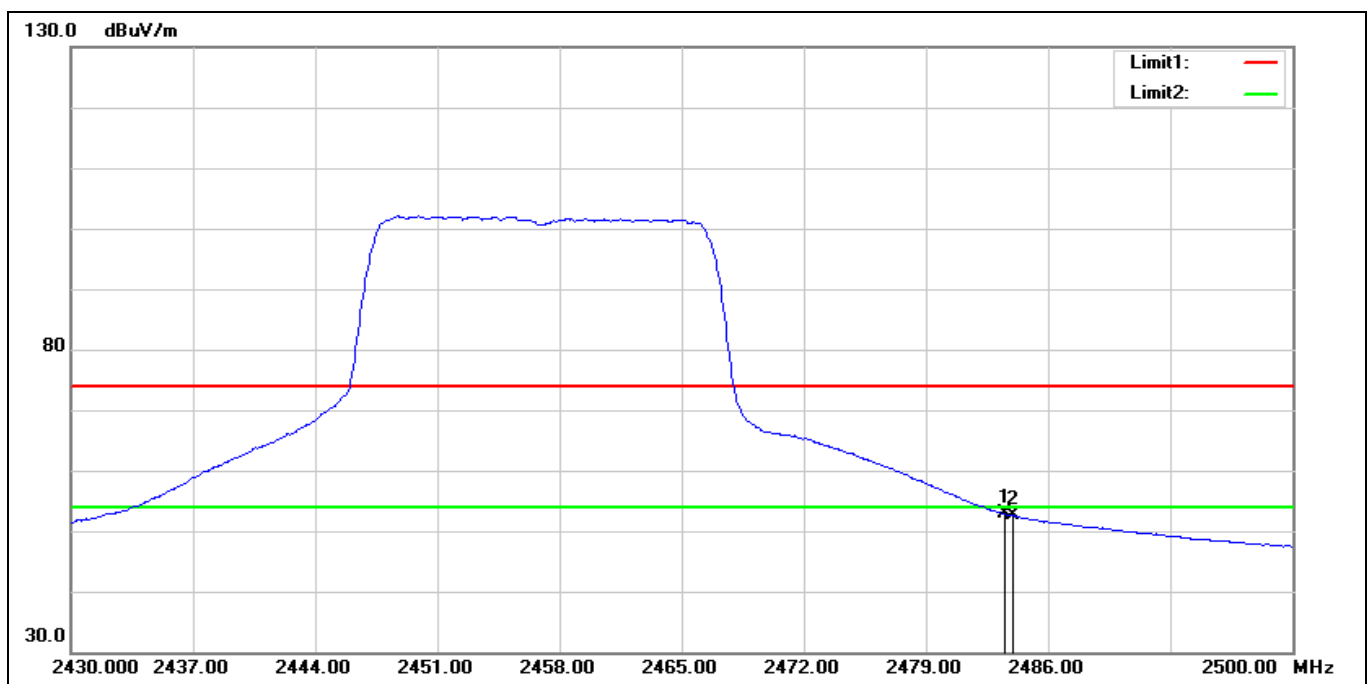


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.98	-6.13	52.85	54.00	-1.15	AVG
2	2483.970	58.85	-6.13	52.72	54.00	-1.28	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

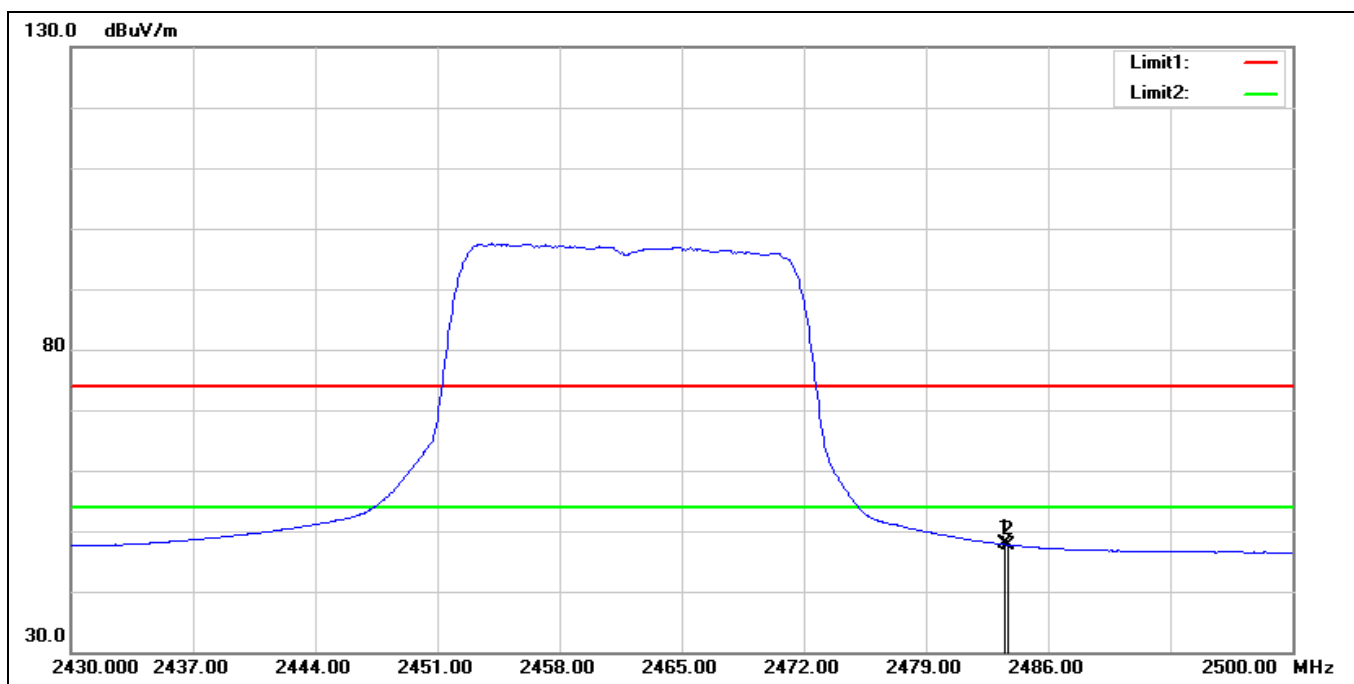


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	53.90	-6.13	47.77	54.00	-6.23	AVG
2	2483.690	53.83	-6.13	47.70	54.00	-6.30	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

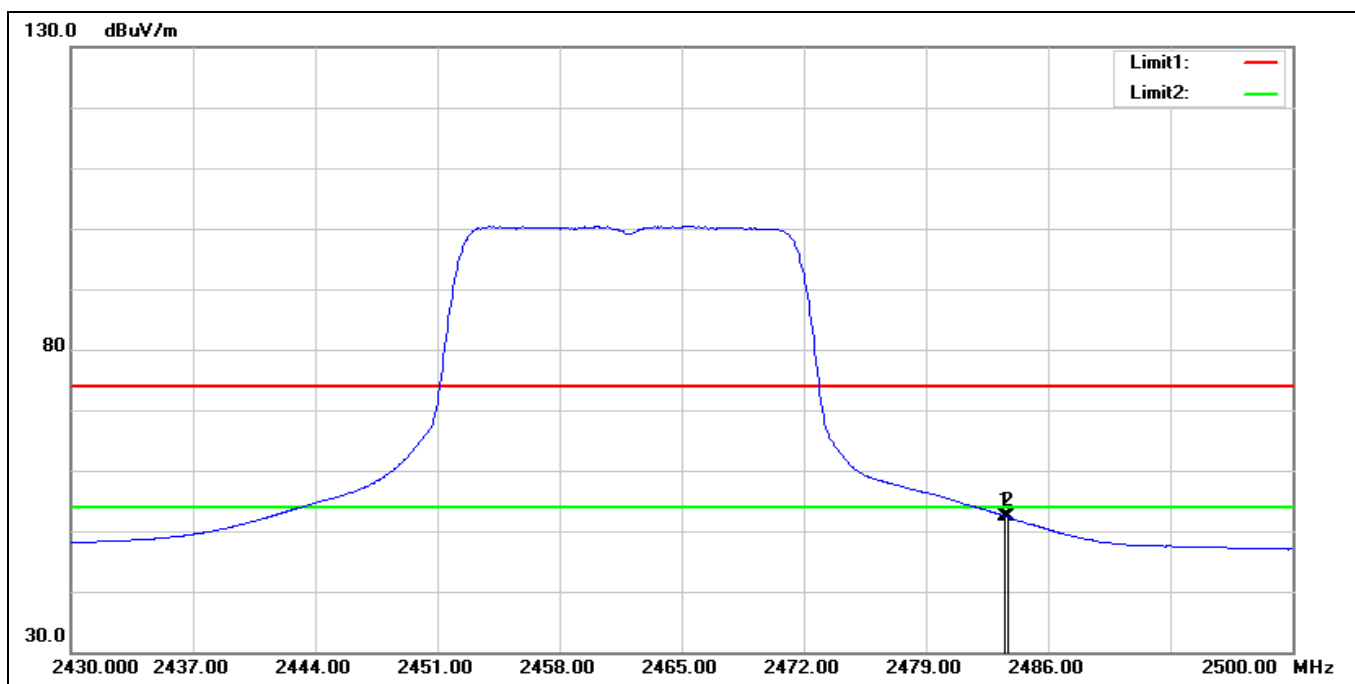


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.55	-6.13	52.42	54.00	-1.58	AVG
2	2483.690	58.45	-6.13	52.32	54.00	-1.68	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

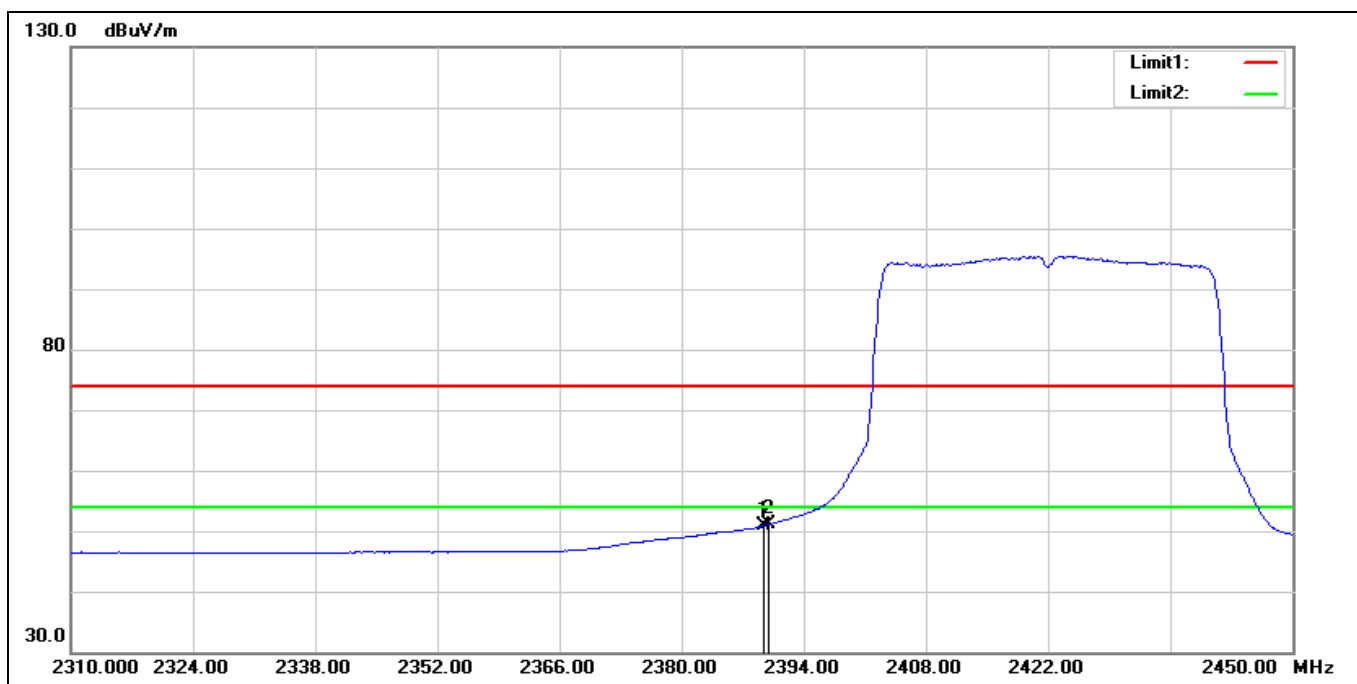


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	56.94	-6.09	50.85	54.00	-3.15	AVG
2*	2390.000	57.18	-6.09	51.09	54.00	-2.91	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

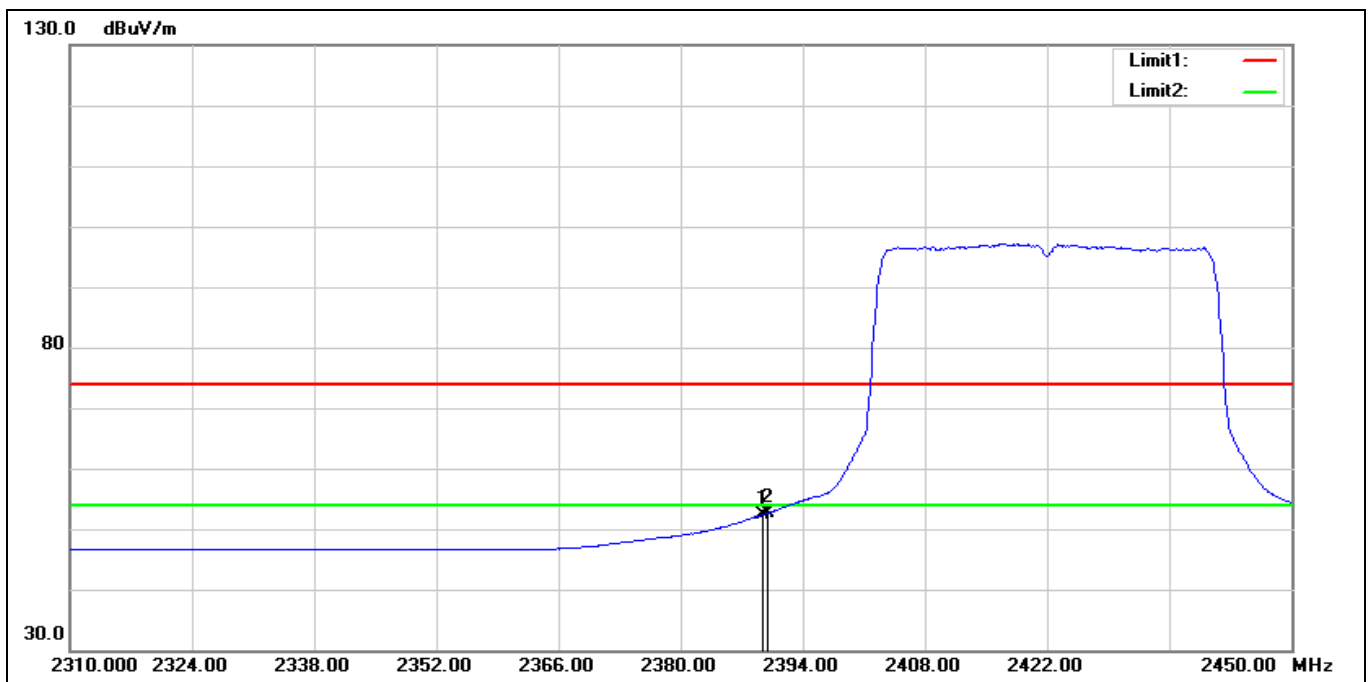


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	58.46	-6.09	52.37	54.00	-1.63	AVG
2*	2390.000	58.79	-6.09	52.70	54.00	-1.30	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

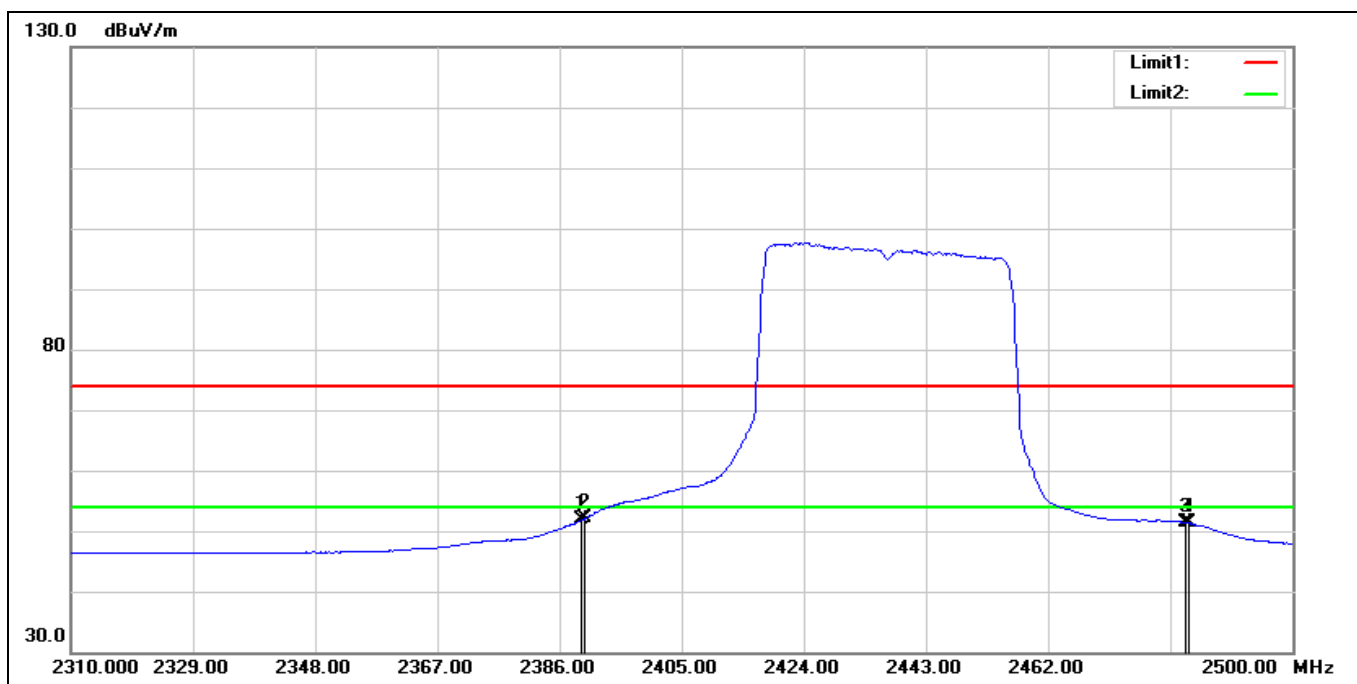


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	57.91	-6.09	51.82	54.00	-2.18	AVG
2*	2390.000	58.29	-6.09	52.20	54.00	-1.80	AVG
3	2483.500	57.49	-6.13	51.36	54.00	-2.64	AVG
4	2483.850	57.50	-6.13	51.37	54.00	-2.63	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

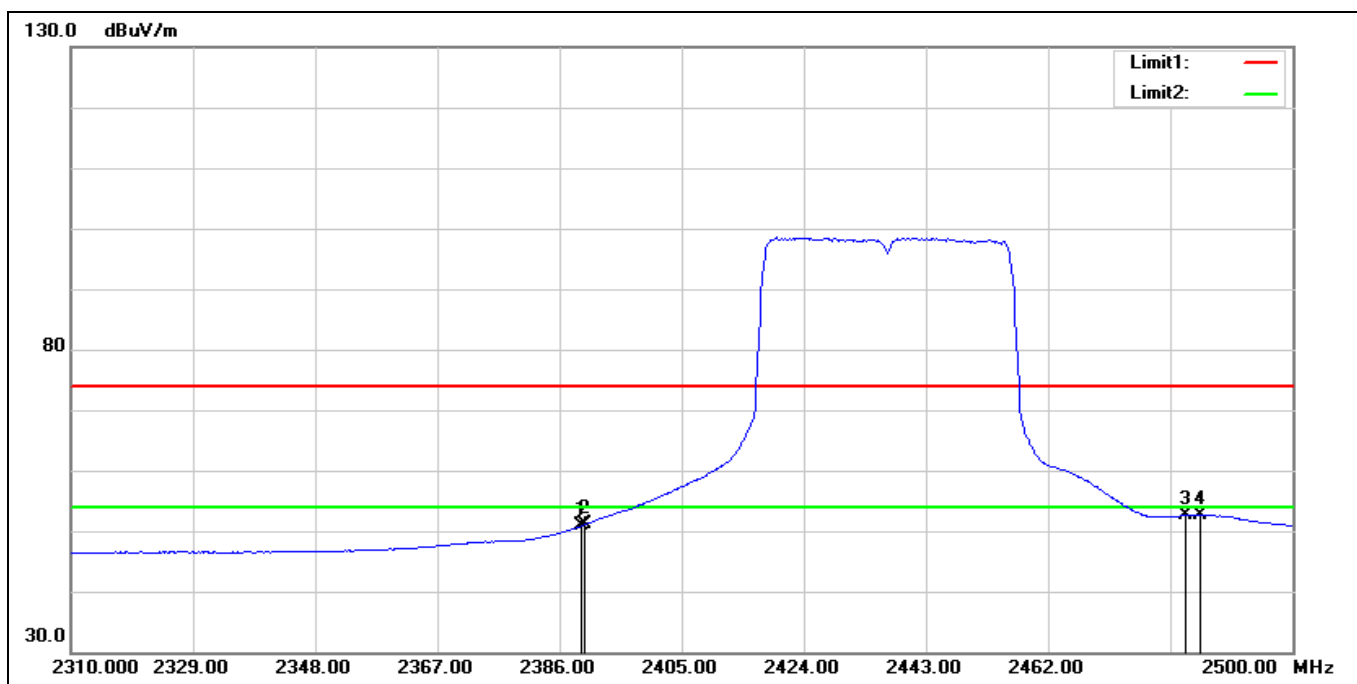


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	56.96	-6.09	50.87	54.00	-3.13	AVG
2	2390.000	57.31	-6.09	51.22	54.00	-2.78	AVG
3	2483.500	58.78	-6.13	52.65	54.00	-1.35	AVG
4*	2485.750	58.84	-6.13	52.71	54.00	-1.29	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

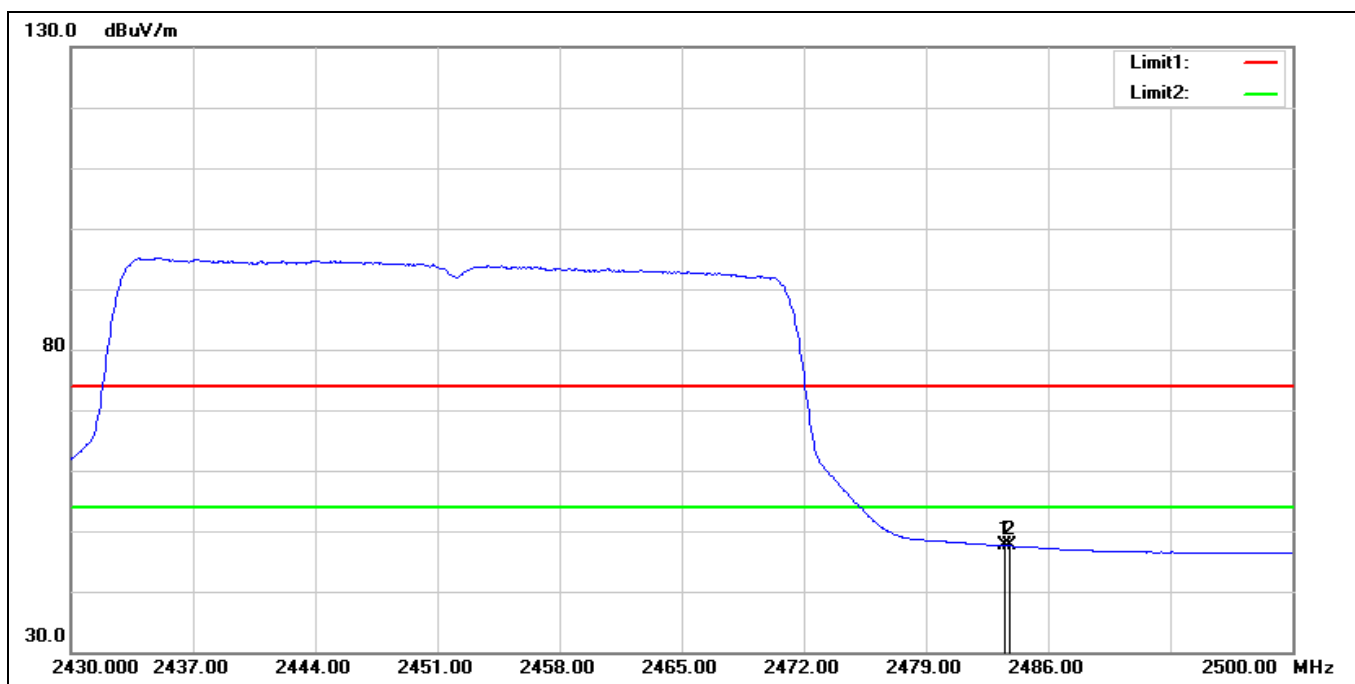

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	53.69	-6.13	47.56	54.00	-6.44	AVG
2	2483.760	53.64	-6.13	47.51	54.00	-6.49	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

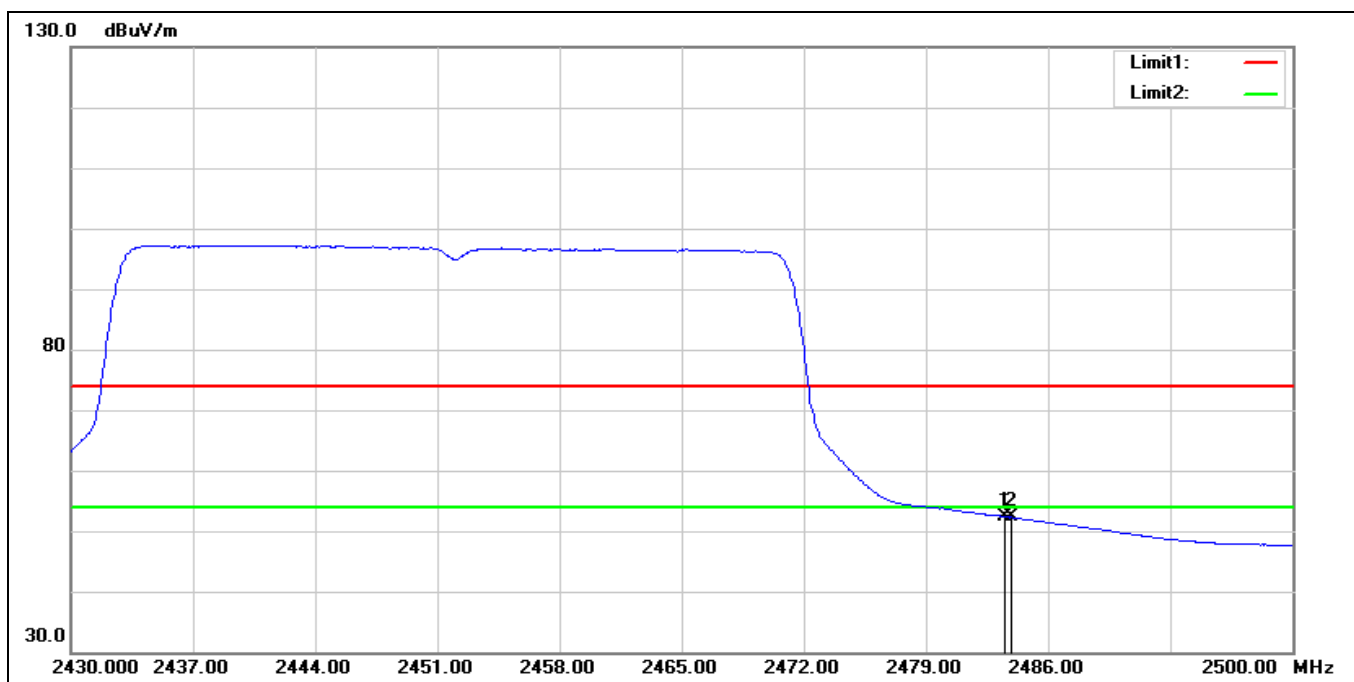


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2483.500	58.51	-6.13	52.38	54.00	-1.62	AVG
2	2483.900	58.39	-6.13	52.26	54.00	-1.74	AVG

2X2


Below 1 GHz

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 2427 MHz
Remark:

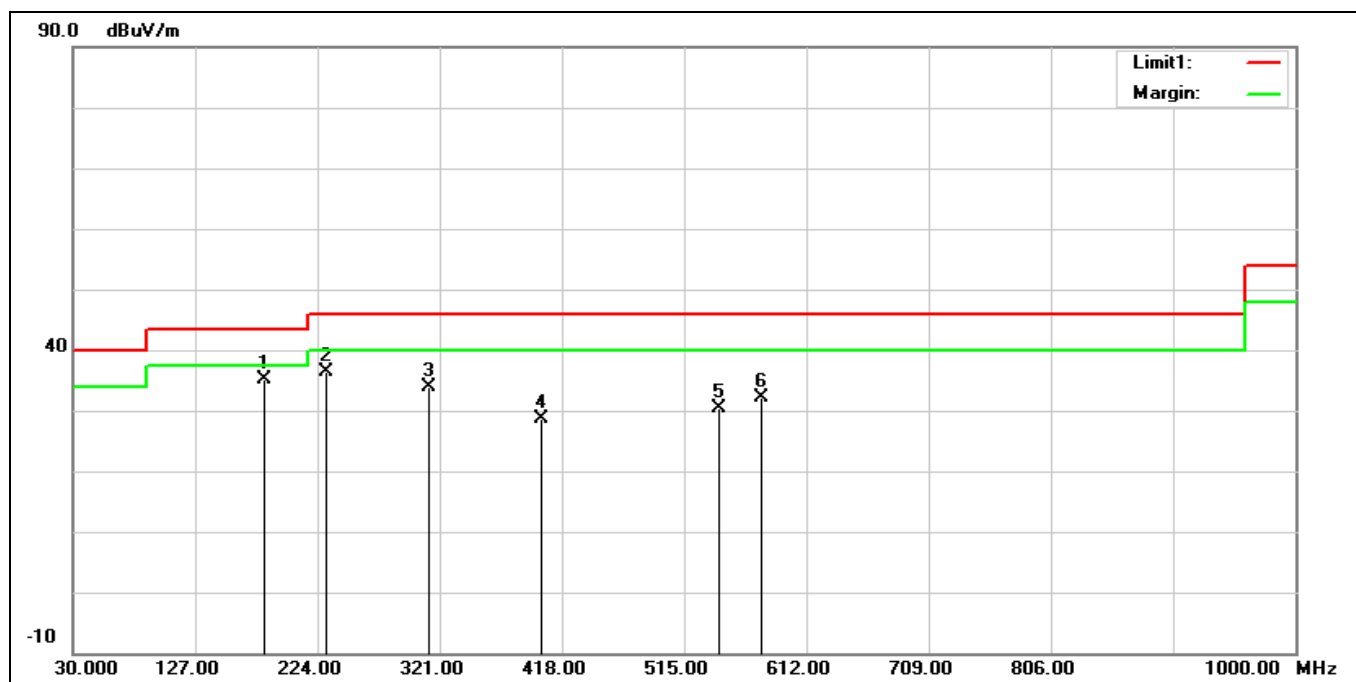

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	181.3200	43.12	-8.02	35.10	43.50	-8.40	QP
2	230.7900	44.64	-8.22	36.42	46.00	-9.58	QP
3	312.2700	39.15	-5.25	33.90	46.00	-12.10	QP
4	401.5100	31.96	-3.44	28.52	46.00	-17.48	QP
5	542.1600	31.66	-1.24	30.42	46.00	-15.58	QP
6	576.1100	32.58	-0.40	32.18	46.00	-13.82	QP

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2427 MHz		
Remark:			

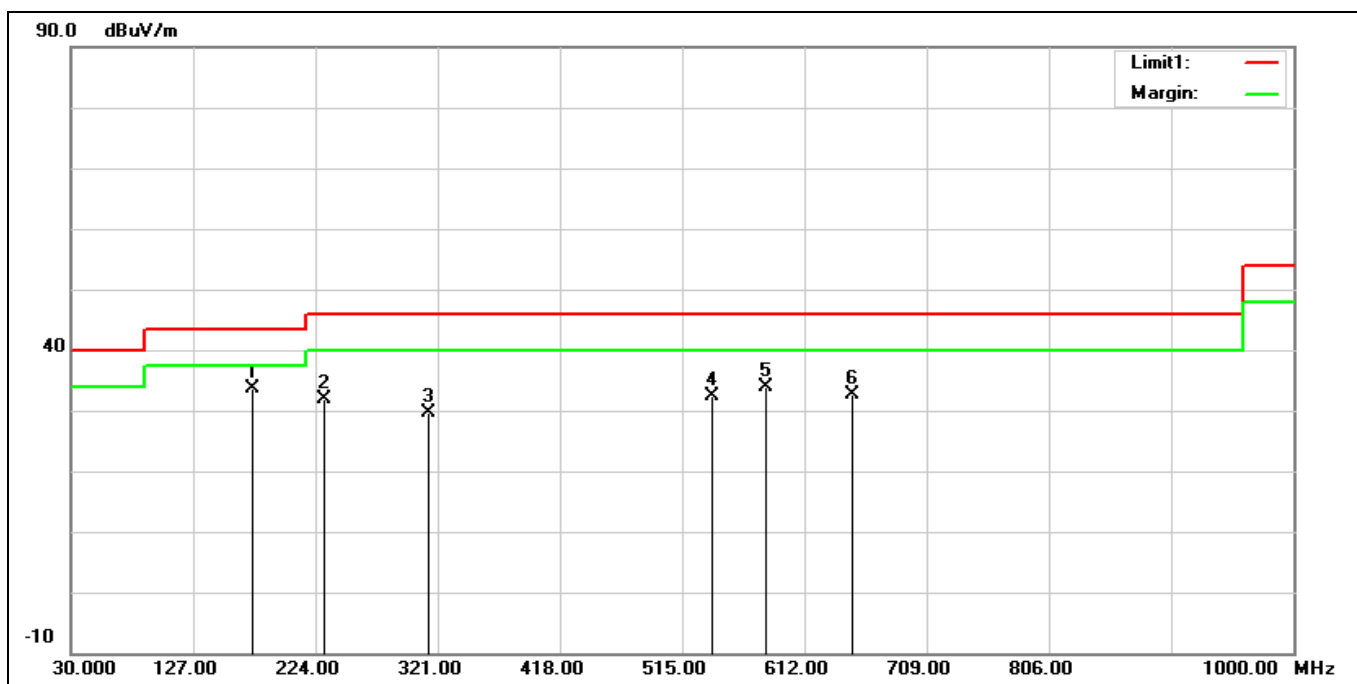


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	174.5300	41.04	-7.33	33.71	43.50	-9.79	QP
2	230.7900	40.20	-8.22	31.98	46.00	-14.02	QP
3	313.2400	34.90	-5.23	29.67	46.00	-16.33	QP
4	539.2500	33.62	-1.30	32.32	46.00	-13.68	QP
5	581.9300	34.01	-0.25	33.76	46.00	-12.24	QP
6	649.8300	31.90	0.83	32.73	46.00	-13.27	QP

Harmonic


Above 1 GHz

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

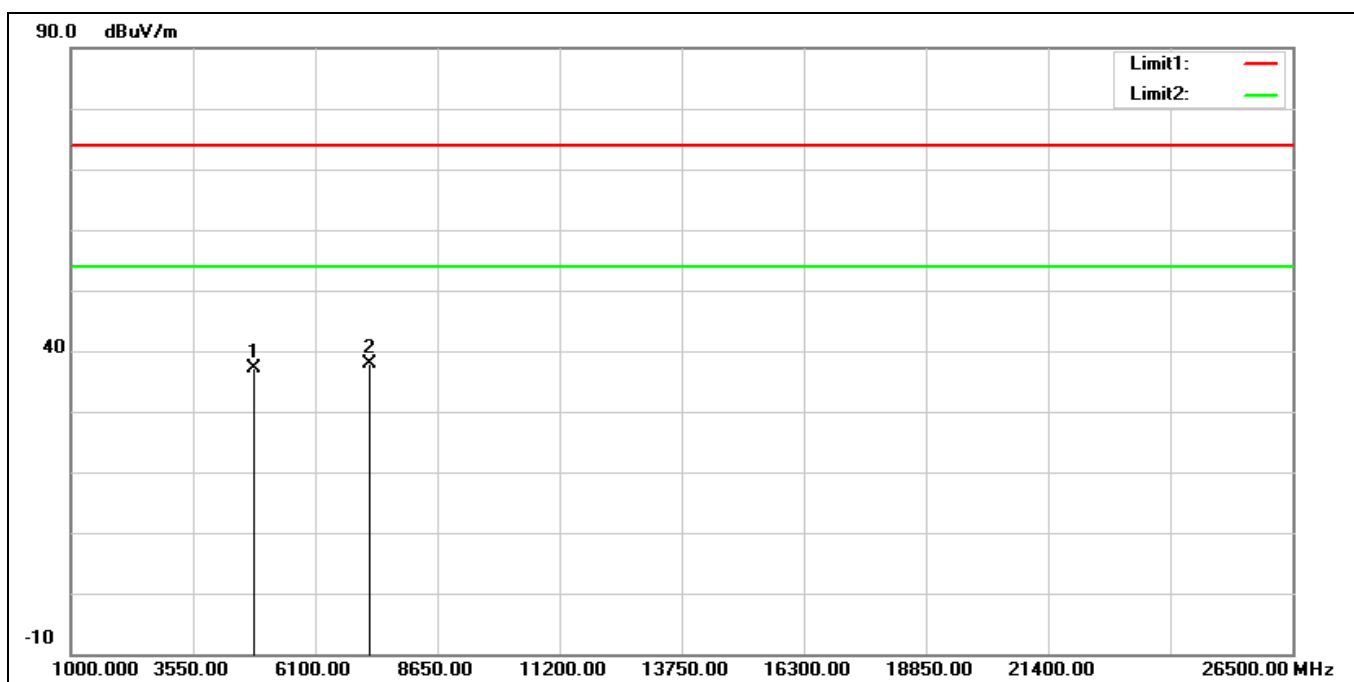


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.99	0.09	37.08	74.00	-36.92	peak
2*	7236.000	30.71	7.13	37.84	74.00	-36.16	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

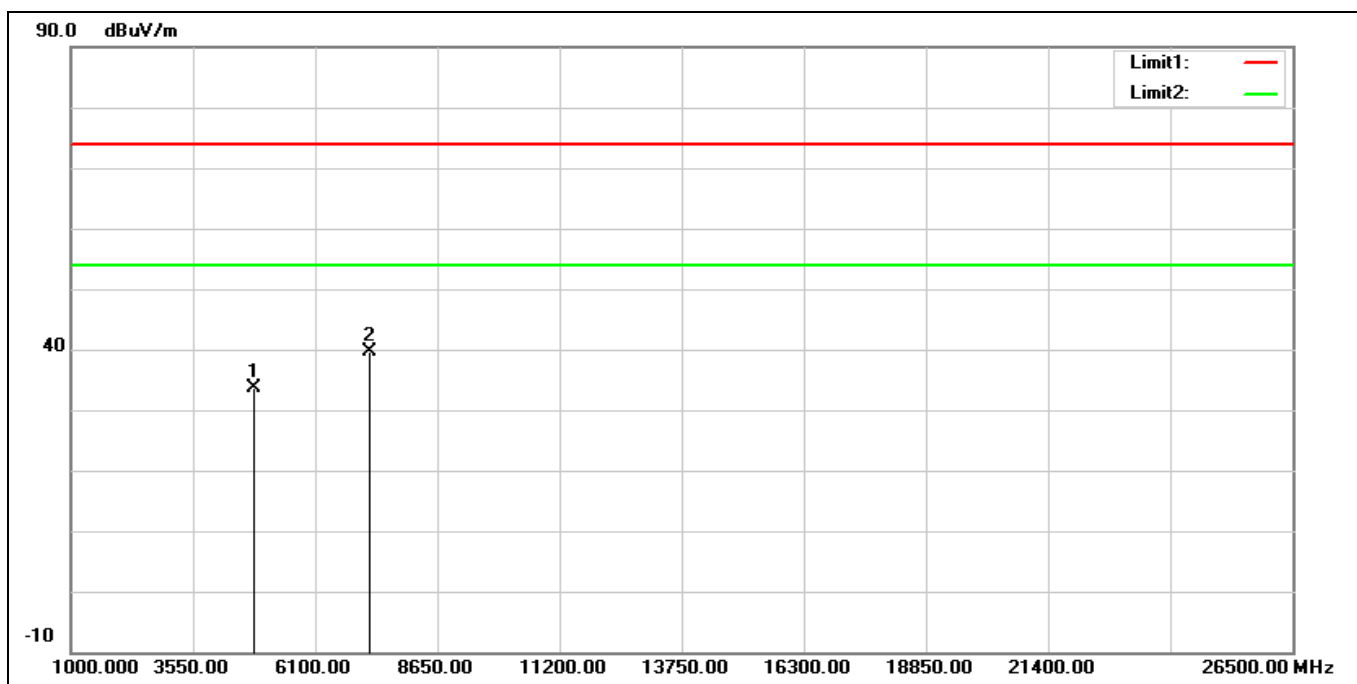


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	33.46	0.09	33.55	74.00	-40.45	peak
2*	7236.000	32.62	7.13	39.75	74.00	-34.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

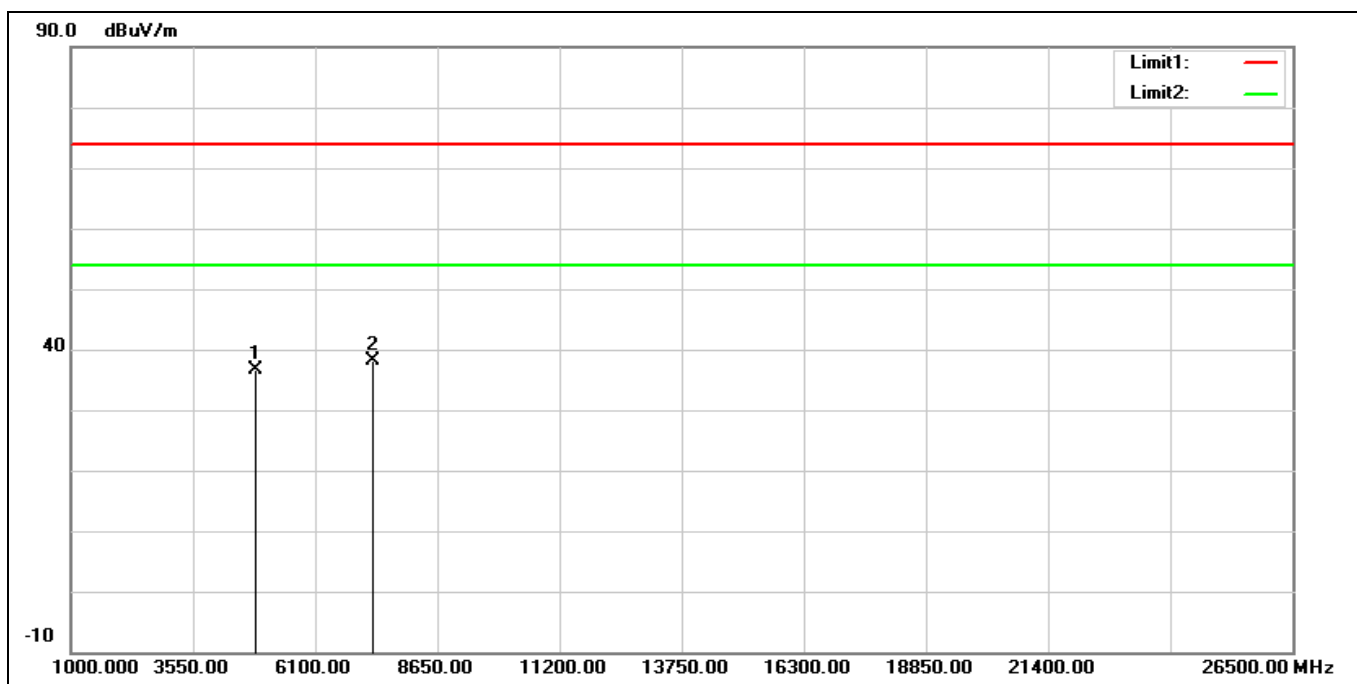


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.29	0.29	36.58	74.00	-37.42	peak
2*	7311.000	30.89	7.16	38.05	74.00	-35.95	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

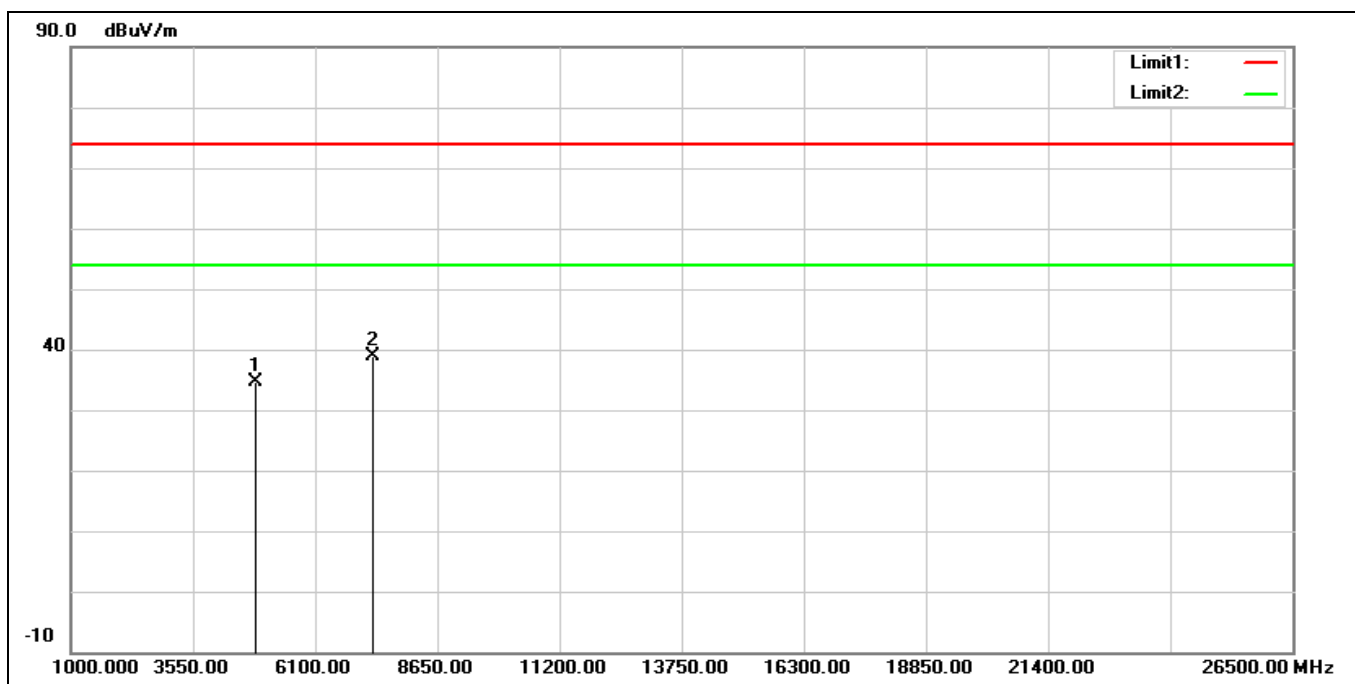


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.31	0.29	34.60	74.00	-39.40	peak
2*	7311.000	31.78	7.16	38.94	74.00	-35.06	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

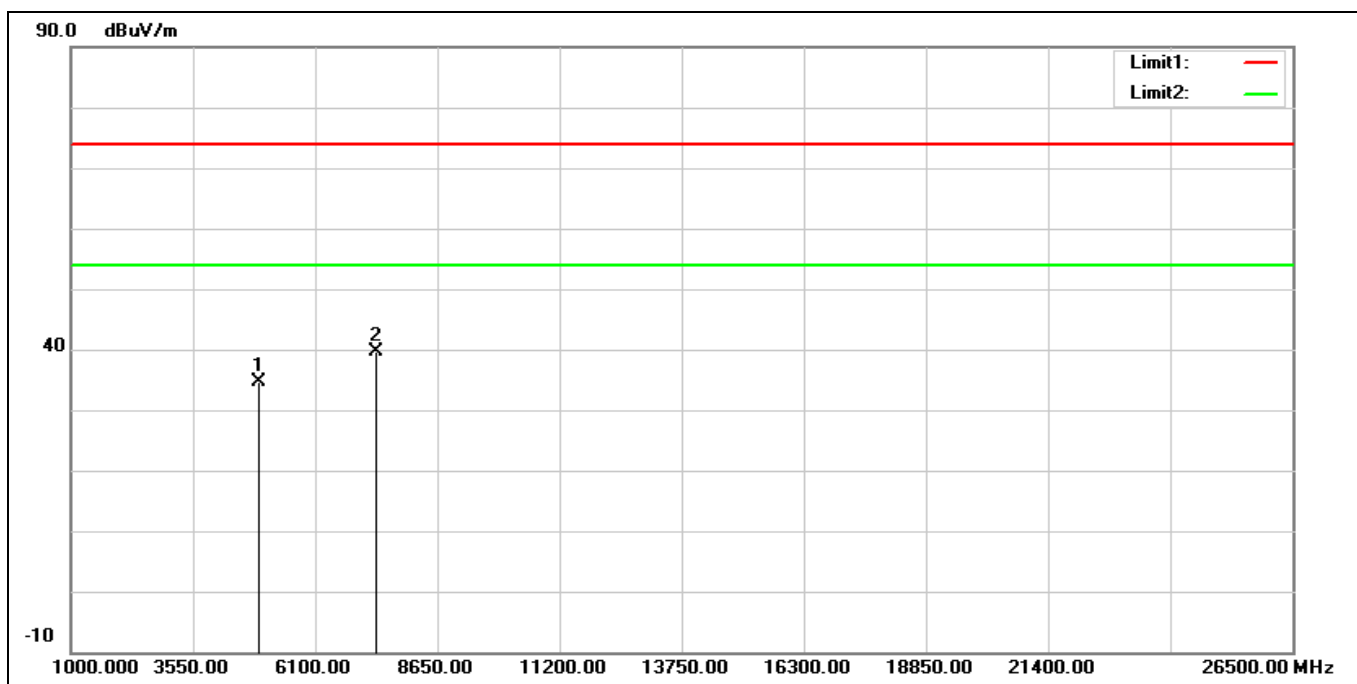


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.21	0.39	34.60	74.00	-39.40	peak
2*	7386.000	32.09	7.46	39.55	74.00	-34.45	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

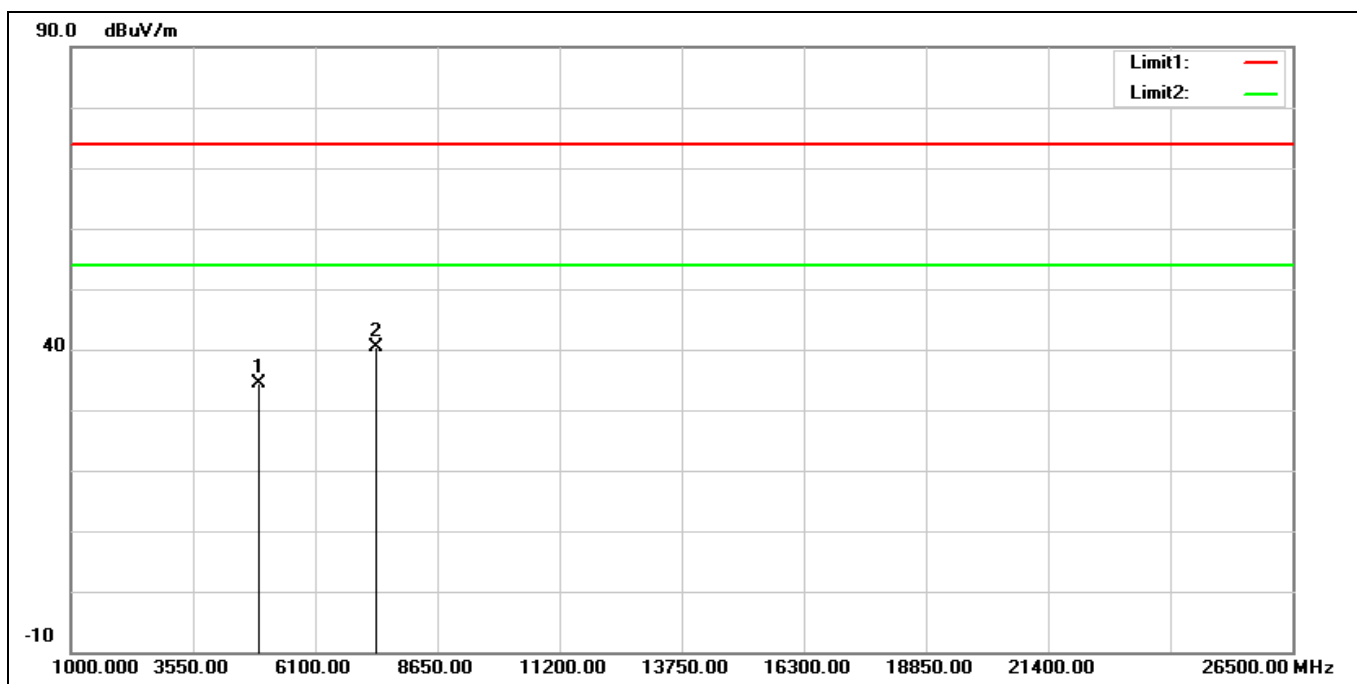


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.03	0.39	34.42	74.00	-39.58	peak
2*	7386.000	32.94	7.46	40.40	74.00	-33.60	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

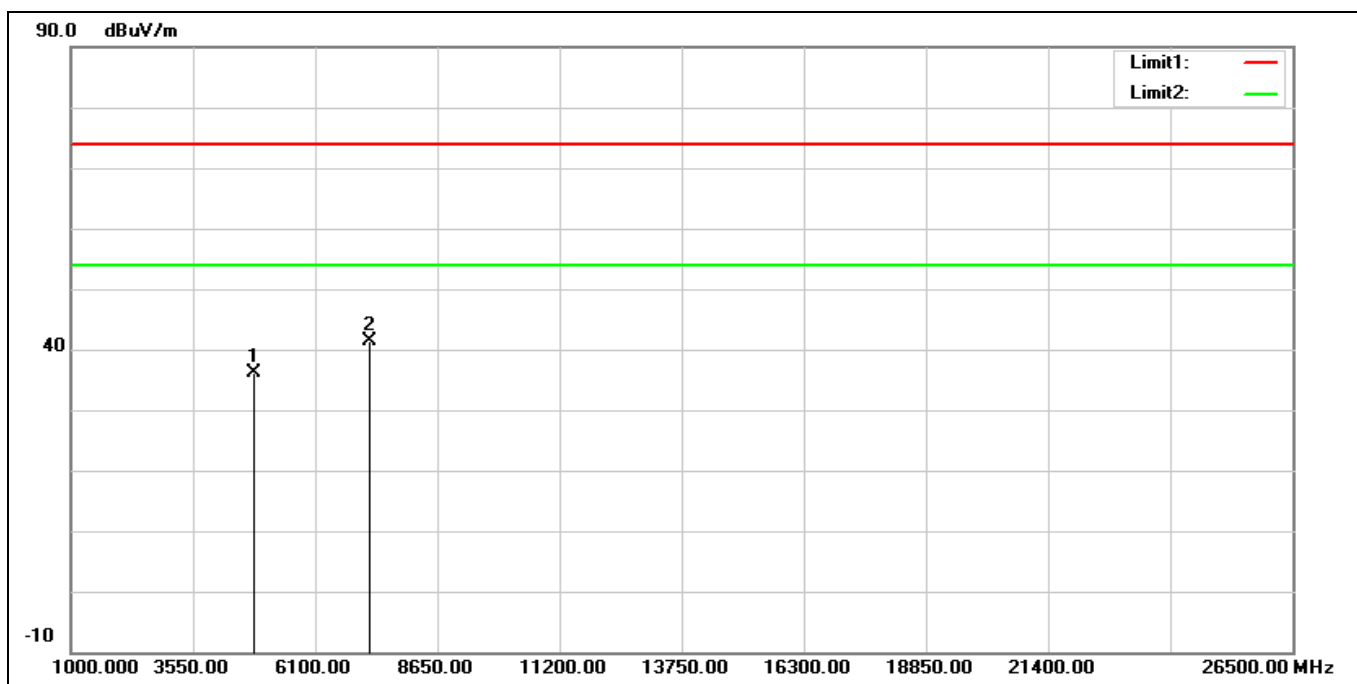


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.98	0.09	36.07	74.00	-37.93	peak
2*	7236.000	34.20	7.13	41.33	74.00	-32.67	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

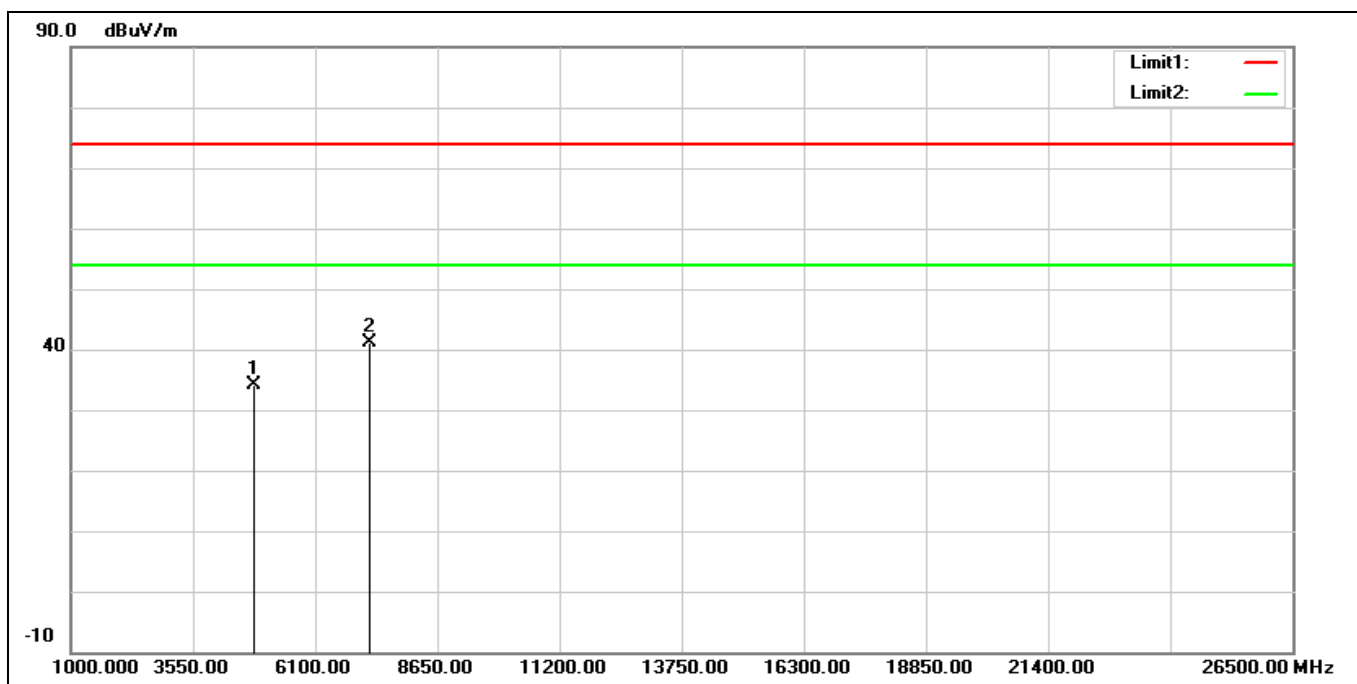


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.14	0.09	34.23	74.00	-39.77	peak
2*	7236.000	33.96	7.13	41.09	74.00	-32.91	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

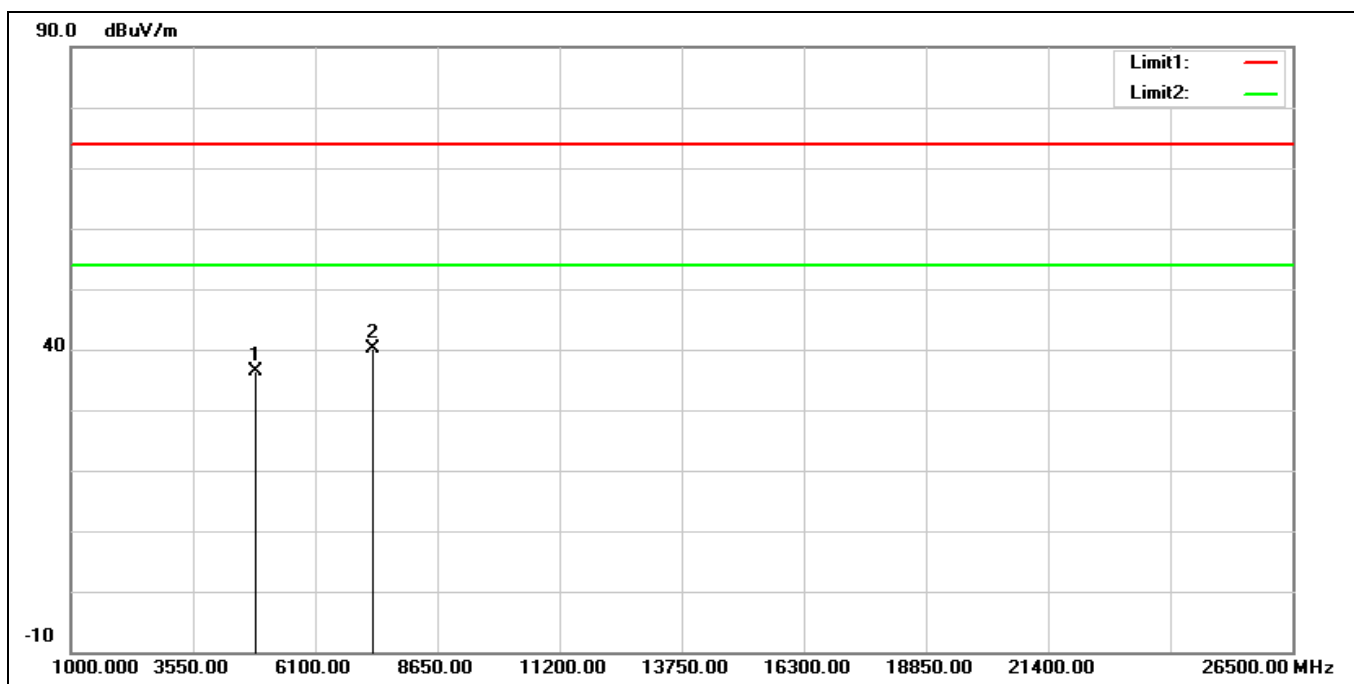


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.02	0.29	36.31	74.00	-37.69	peak
2*	7311.000	32.99	7.16	40.15	74.00	-33.85	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

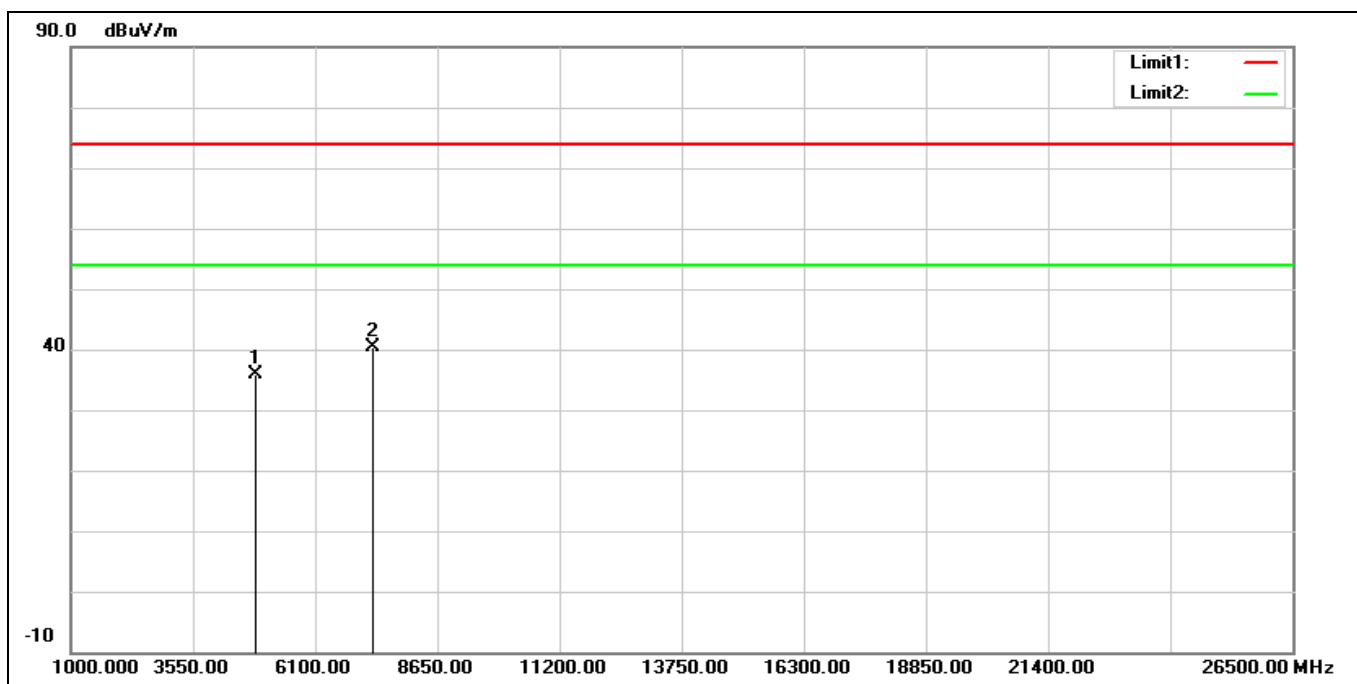


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.48	0.29	35.77	74.00	-38.23	peak
2*	7311.000	33.11	7.16	40.27	74.00	-33.73	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

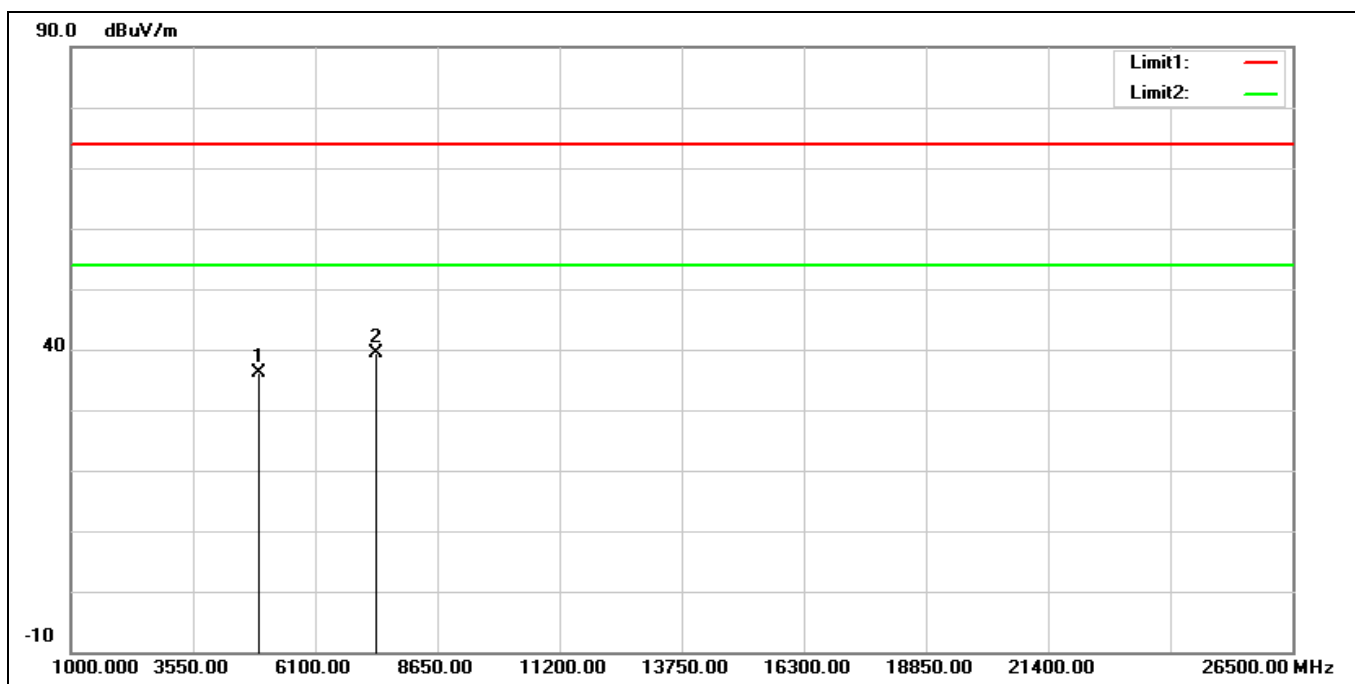


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.75	0.39	36.14	74.00	-37.86	peak
2*	7386.000	31.94	7.46	39.40	74.00	-34.60	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

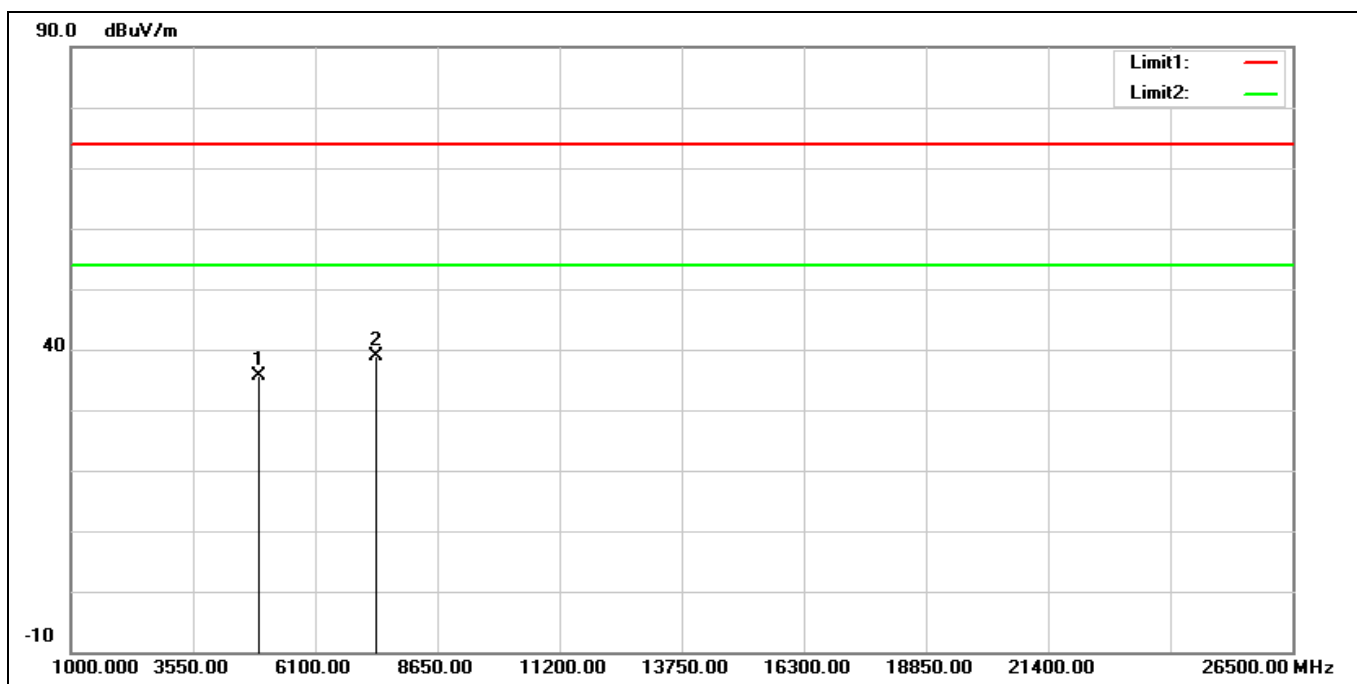


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	35.33	0.39	35.72	74.00	-38.28	peak
2*	7386.000	31.41	7.46	38.87	74.00	-35.13	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

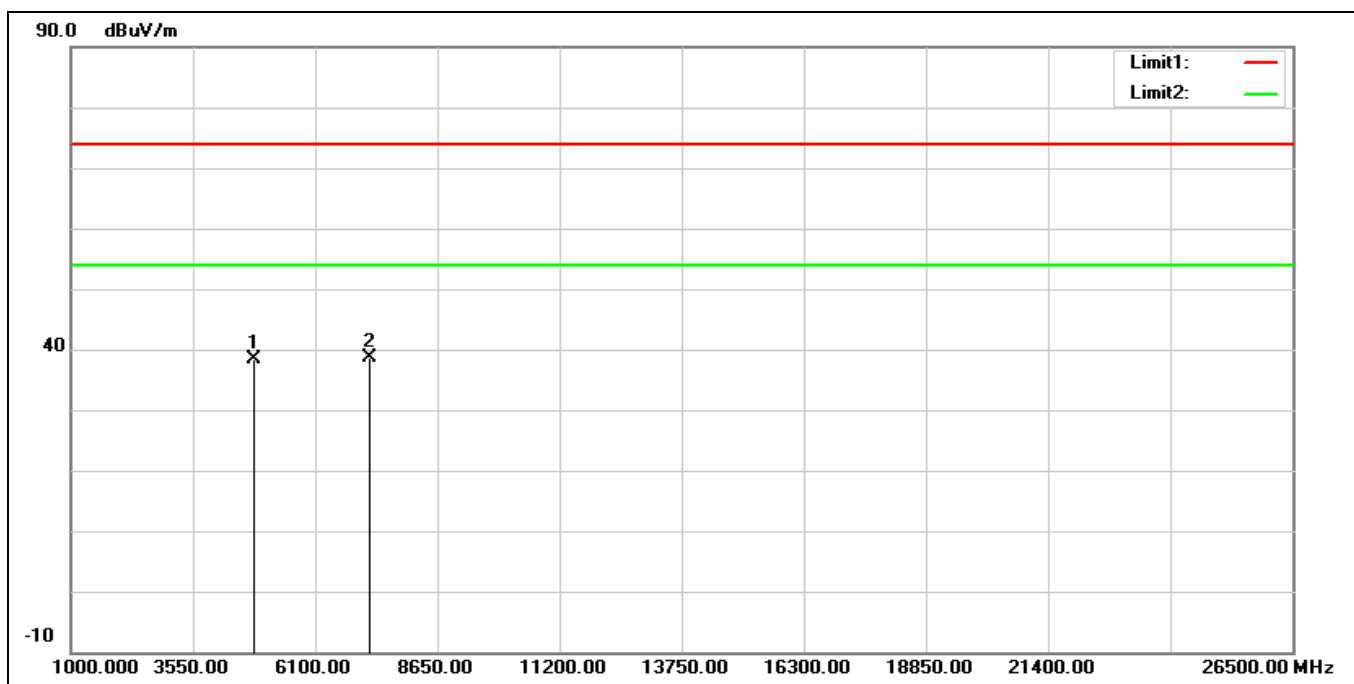


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	38.32	0.09	38.41	74.00	-35.59	peak
2*	7236.000	31.60	7.13	38.73	74.00	-35.27	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

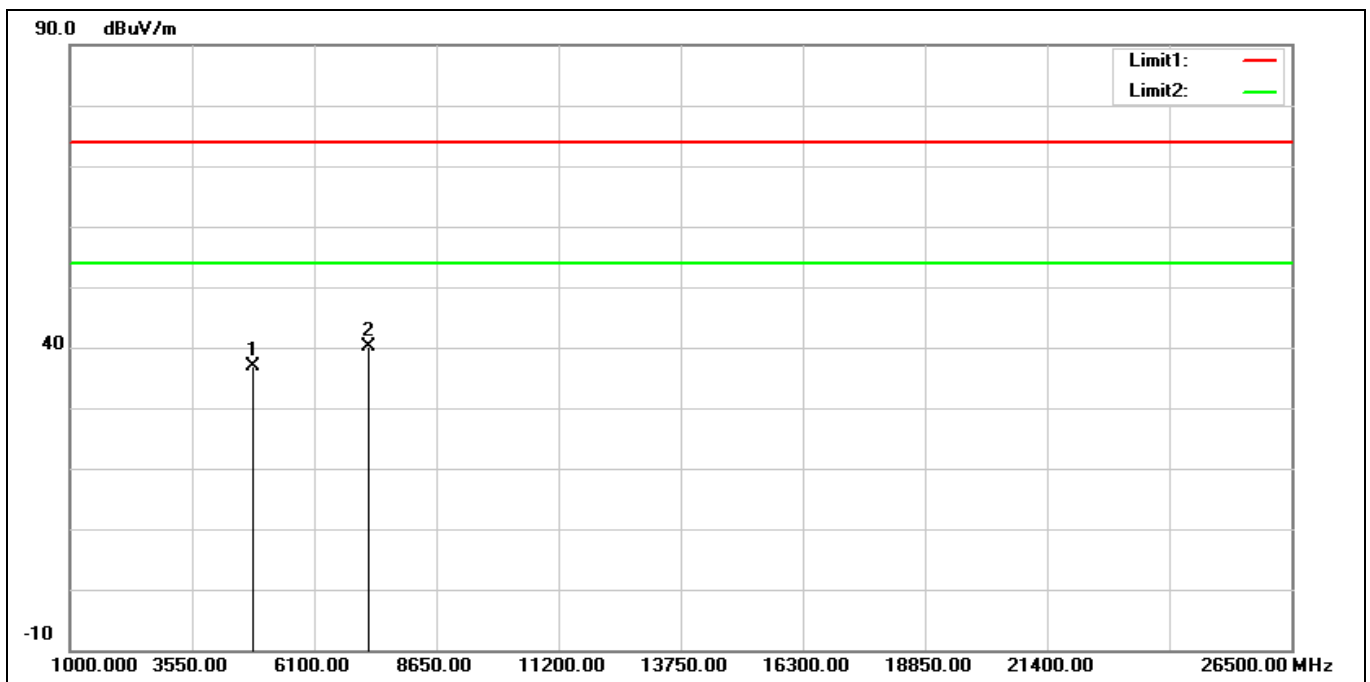


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.69	0.09	36.78	74.00	-37.22	peak
2*	7236.000	33.01	7.13	40.14	74.00	-33.86	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2417 MHz		
Remark:			

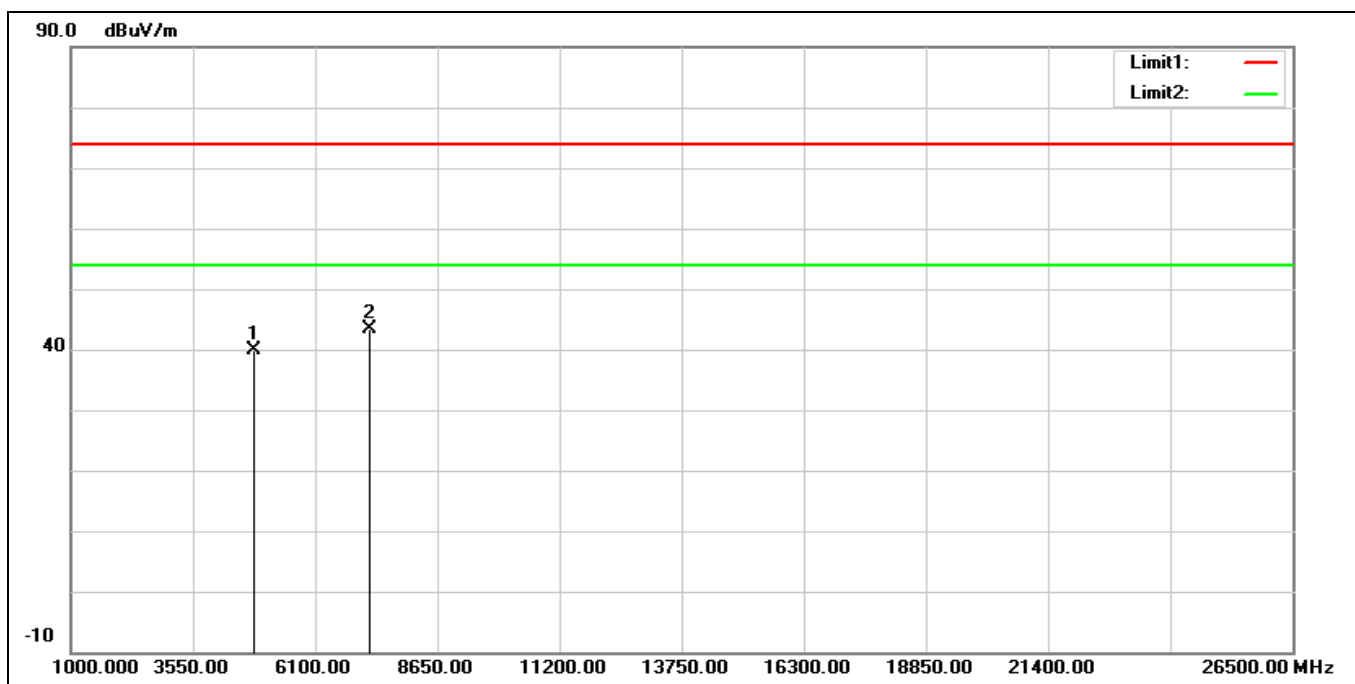


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4834.000	39.64	0.12	39.76	74.00	-34.24	peak
2*	7251.000	36.17	7.18	43.35	74.00	-30.65	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2417 MHz		
Remark:			

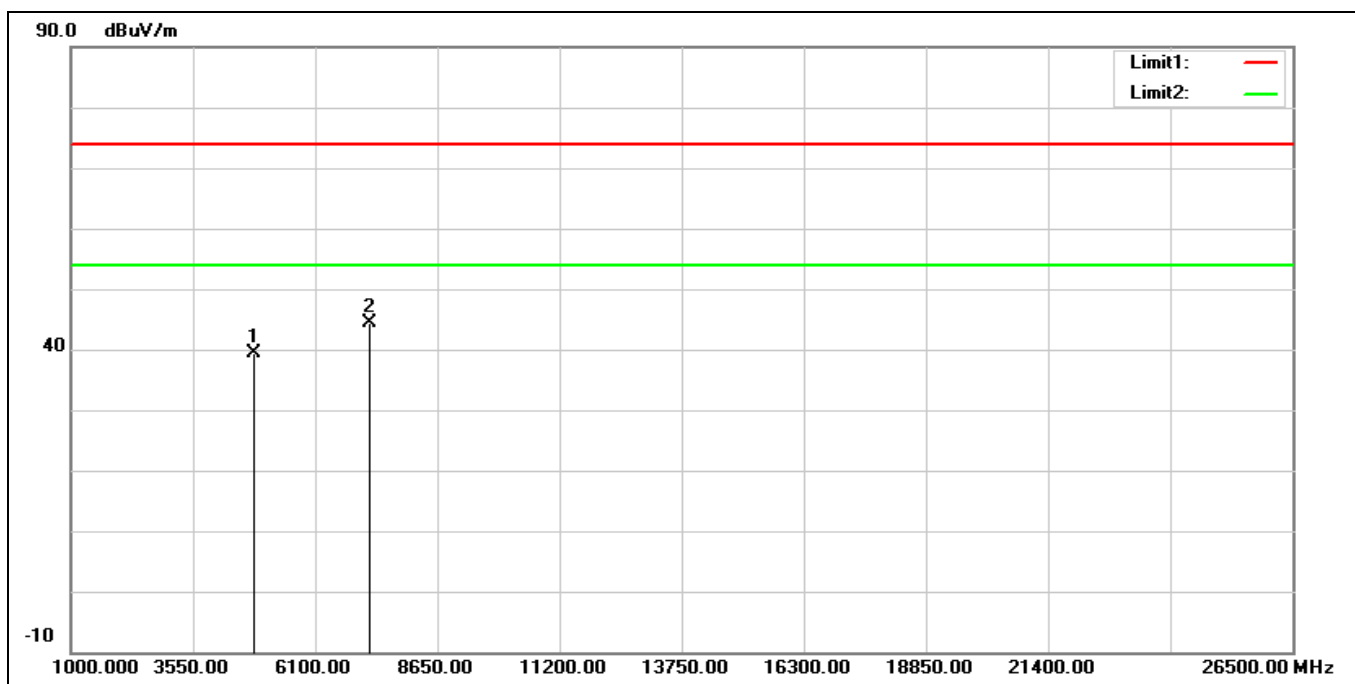


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4834.000	39.35	0.12	39.47	74.00	-34.53	peak
2*	7251.000	37.09	7.18	44.27	74.00	-29.73	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

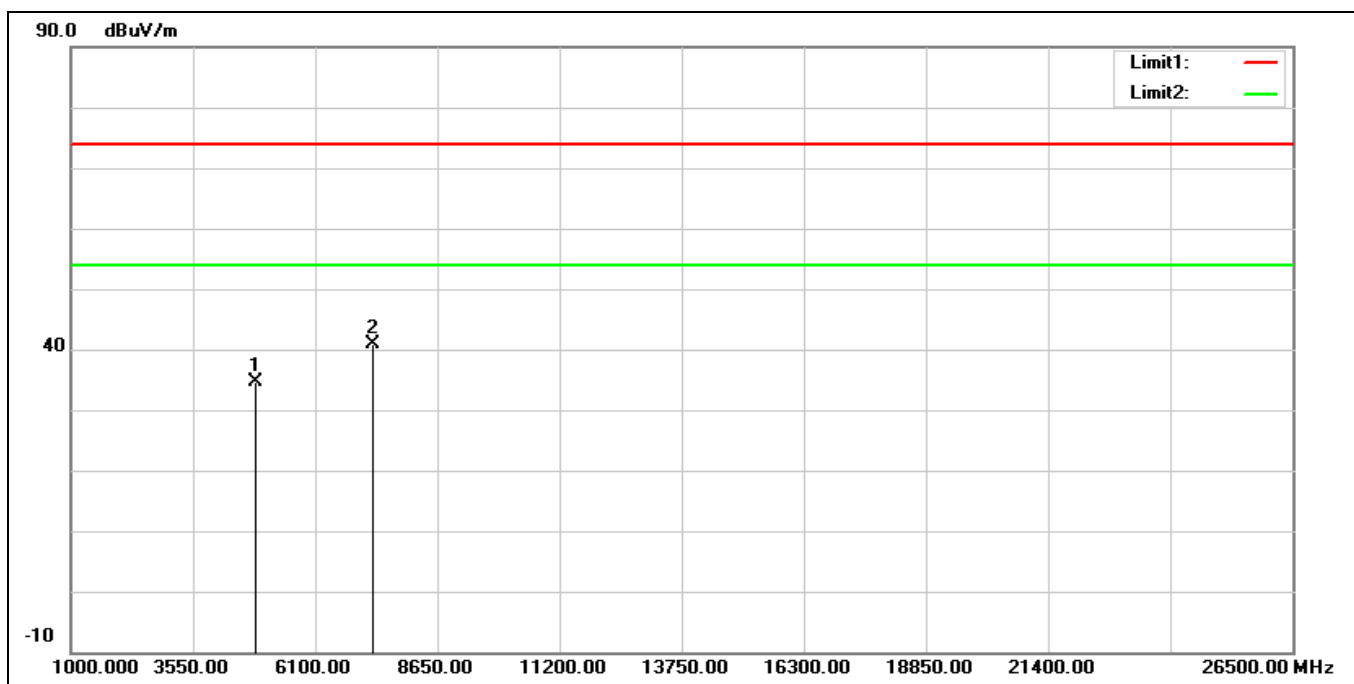


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.33	0.29	34.62	74.00	-39.38	peak
2*	7311.000	33.74	7.16	40.90	74.00	-33.10	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2437 MHz		
Remark:			

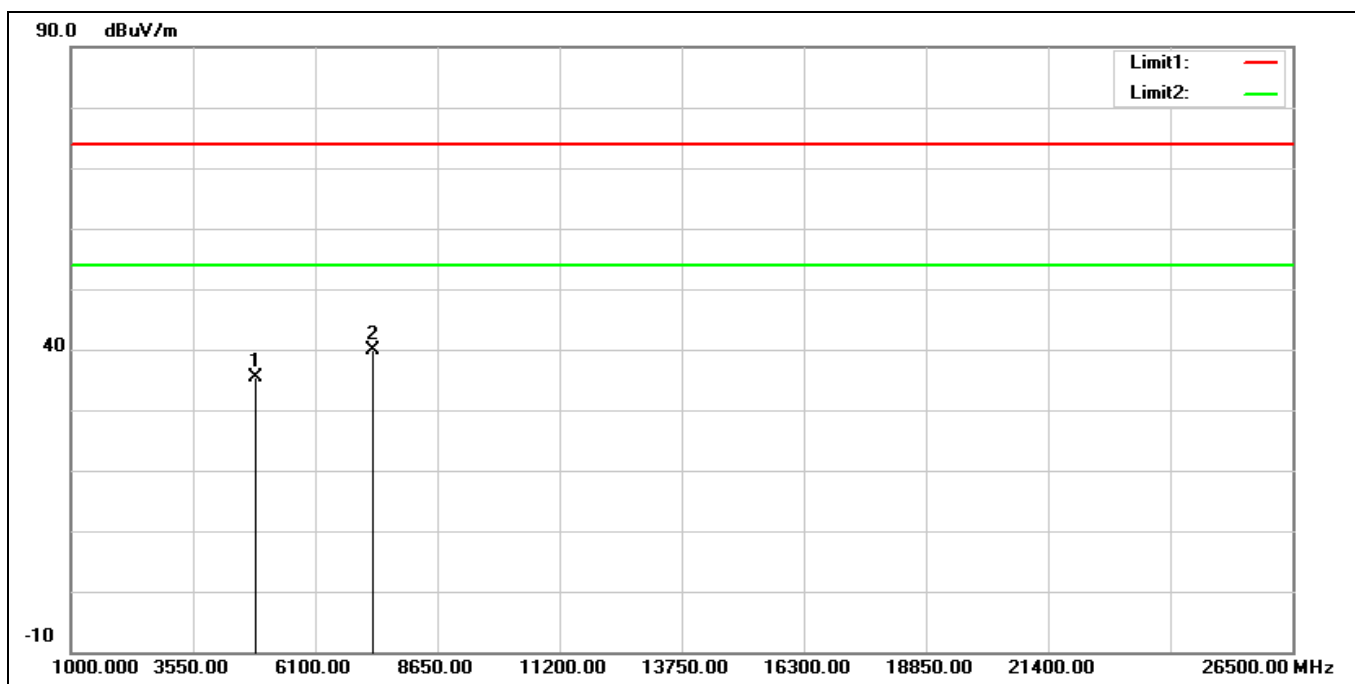


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.06	0.29	35.35	74.00	-38.65	peak
2*	7311.000	32.68	7.16	39.84	74.00	-34.16	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

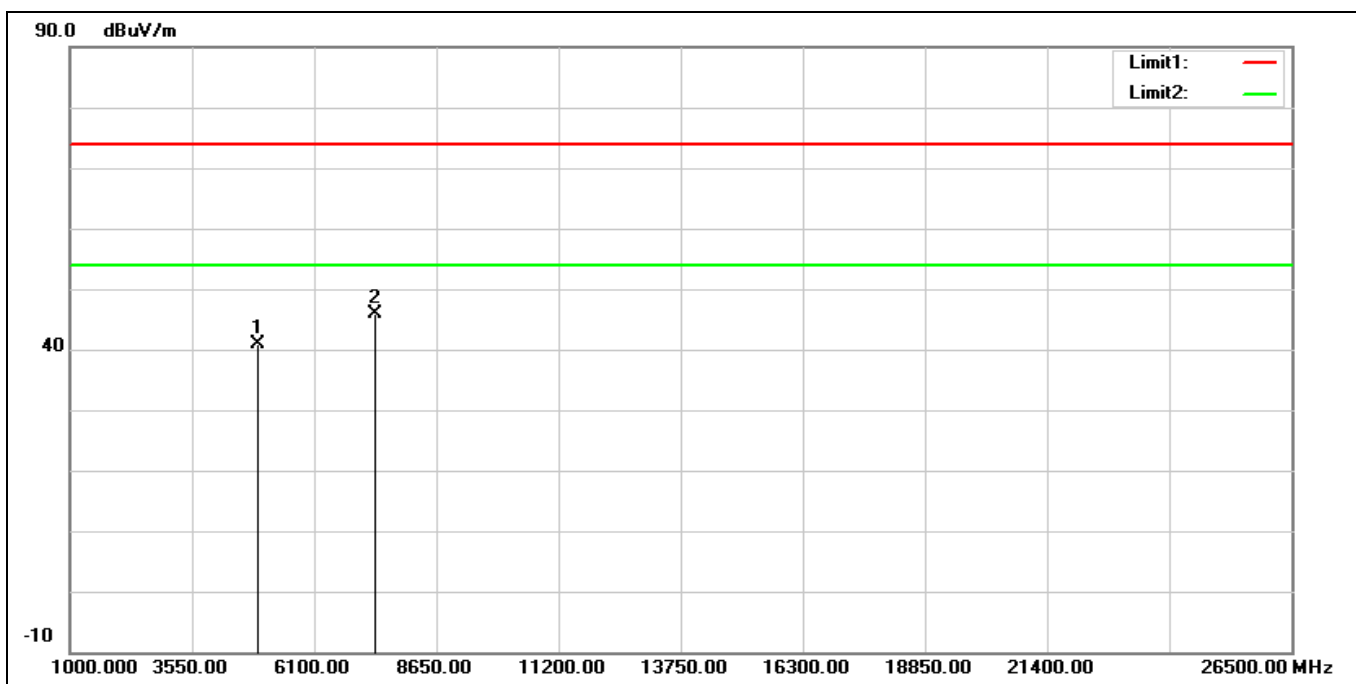


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	40.46	0.39	40.85	74.00	-33.15	peak
2*	7371.000	38.41	7.39	45.80	74.00	-28.20	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

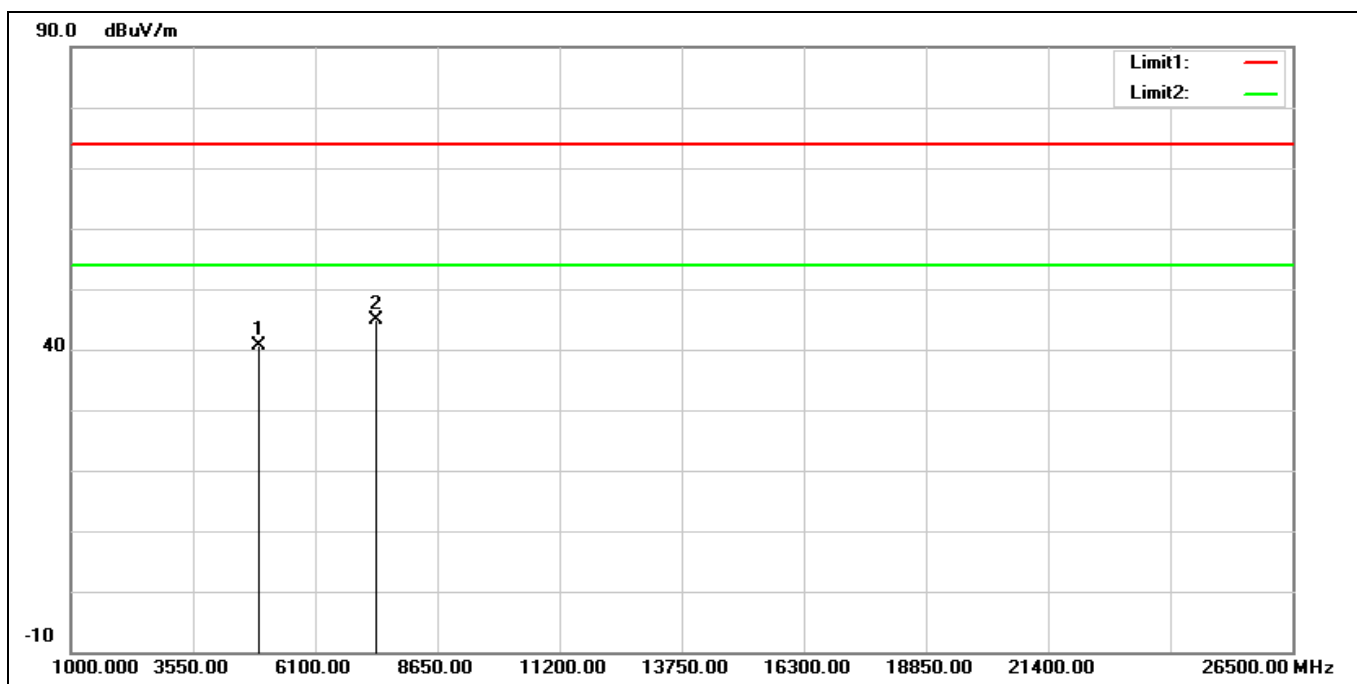


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	40.20	0.39	40.59	74.00	-33.41	peak
2*	7371.000	37.50	7.39	44.89	74.00	-29.11	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

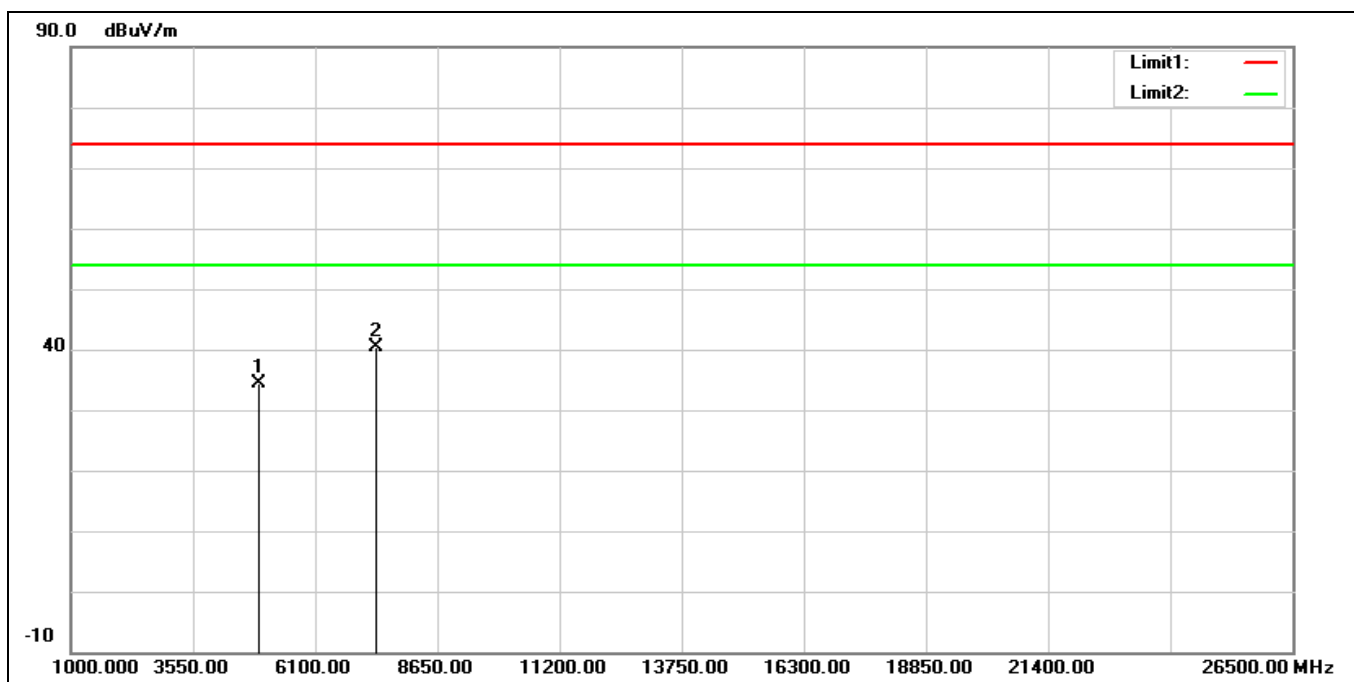


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.07	0.39	34.46	74.00	-39.54	peak
2*	7386.000	33.03	7.46	40.49	74.00	-33.51	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

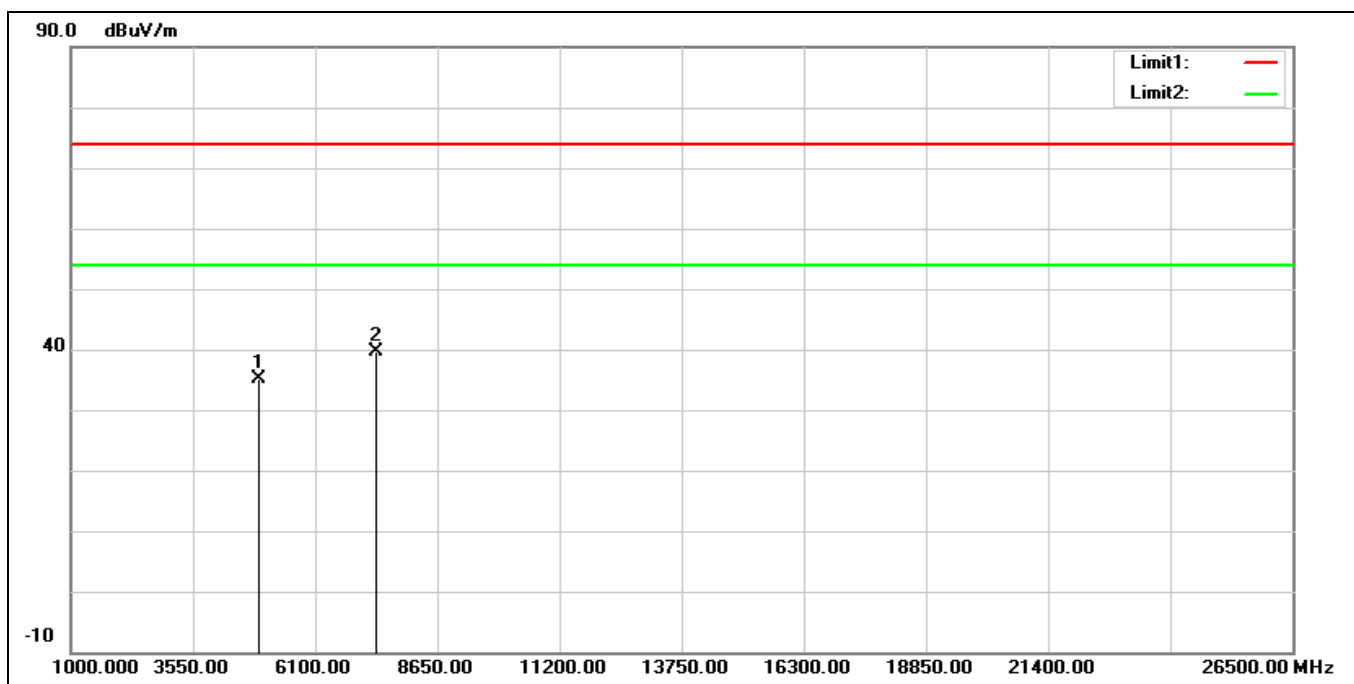


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.83	0.39	35.22	74.00	-38.78	peak
2*	7386.000	32.29	7.46	39.75	74.00	-34.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

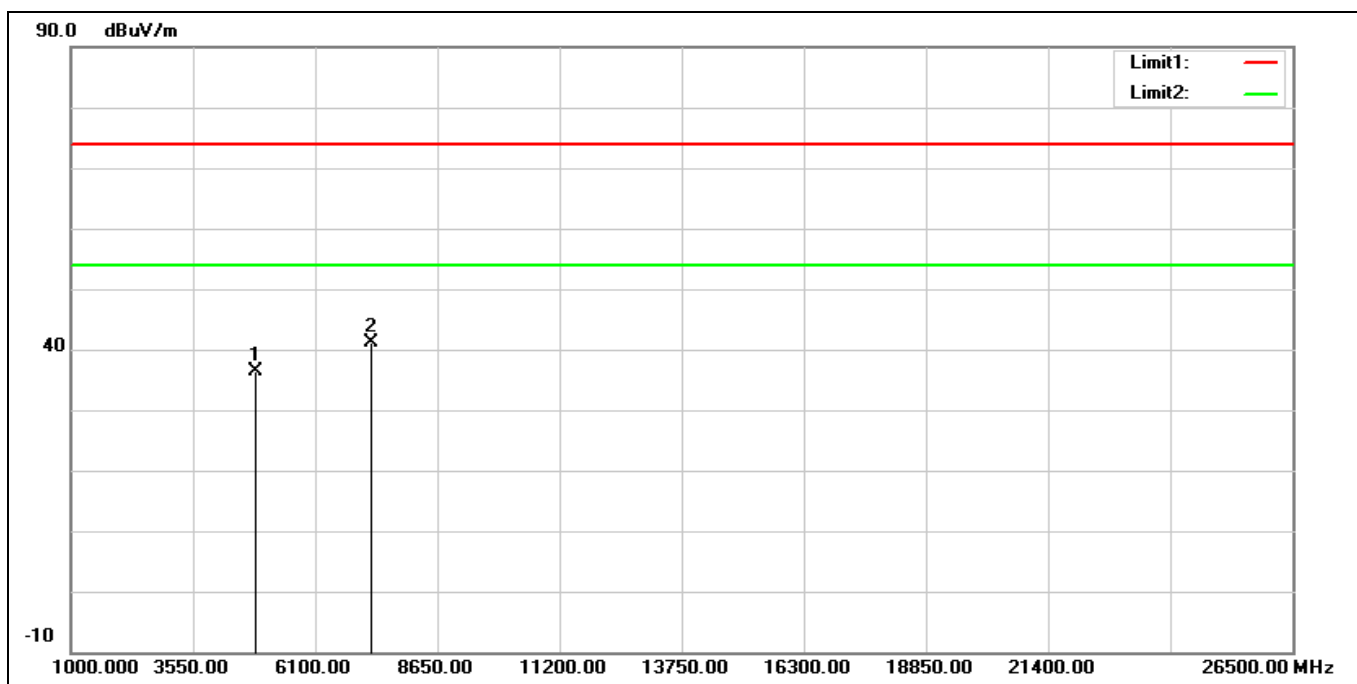


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.27	0.16	36.43	74.00	-37.57	peak
2*	7266.000	34.02	7.16	41.18	74.00	-32.82	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

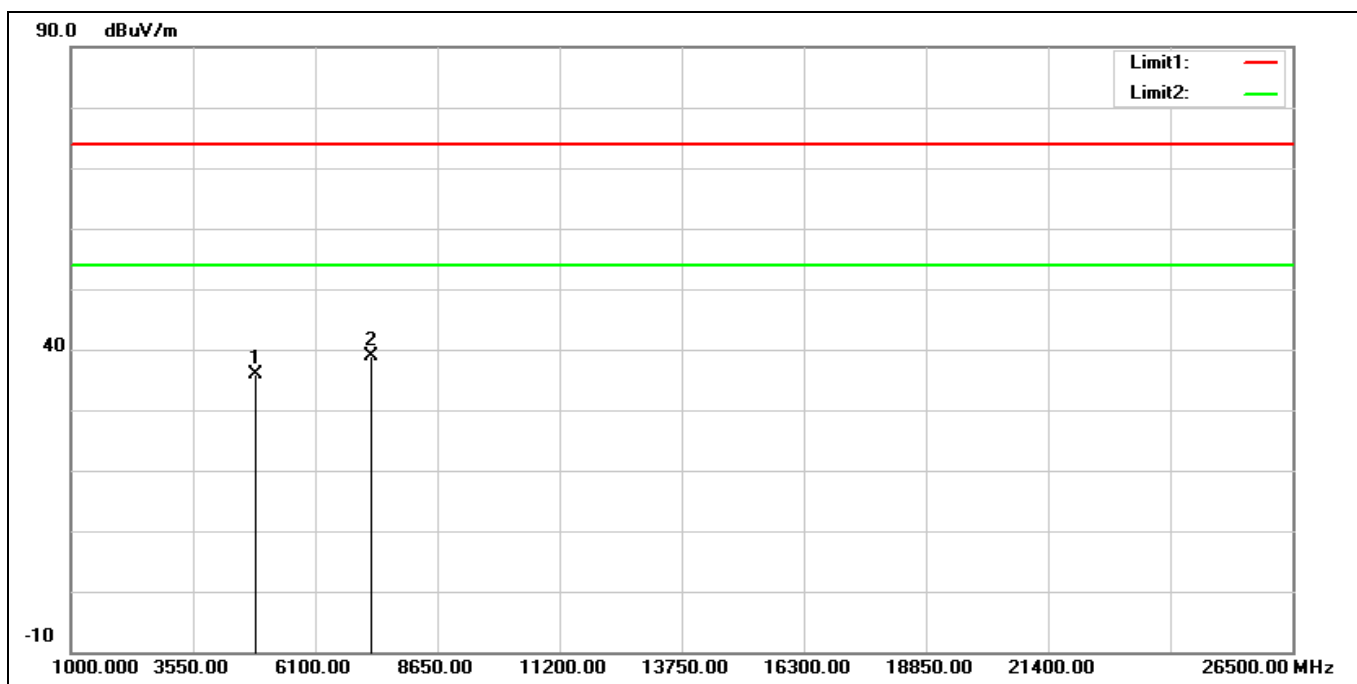


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	35.74	0.16	35.90	74.00	-38.10	peak
2*	7266.000	31.70	7.16	38.86	74.00	-35.14	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2427 MHz		
Remark:			

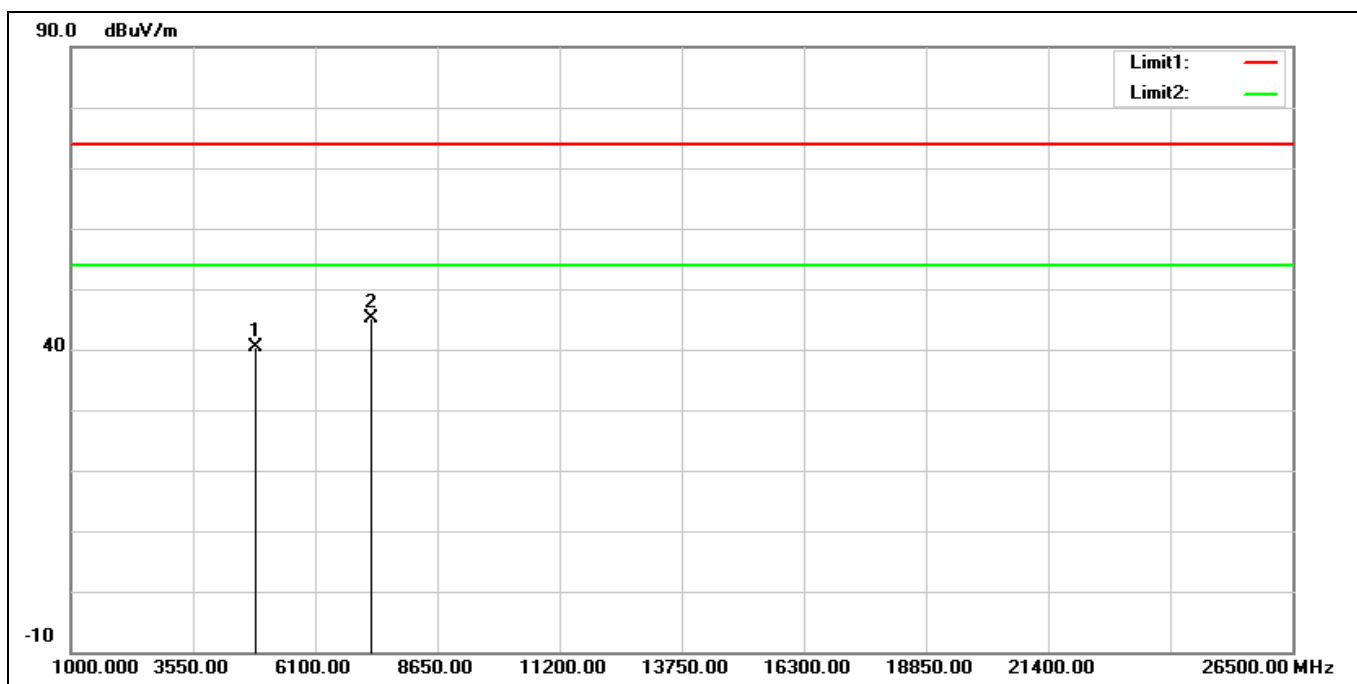


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4854.000	40.07	0.21	40.28	74.00	-33.72	peak
2*	7281.000	38.07	7.15	45.22	74.00	-28.78	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2427 MHz		
Remark:			

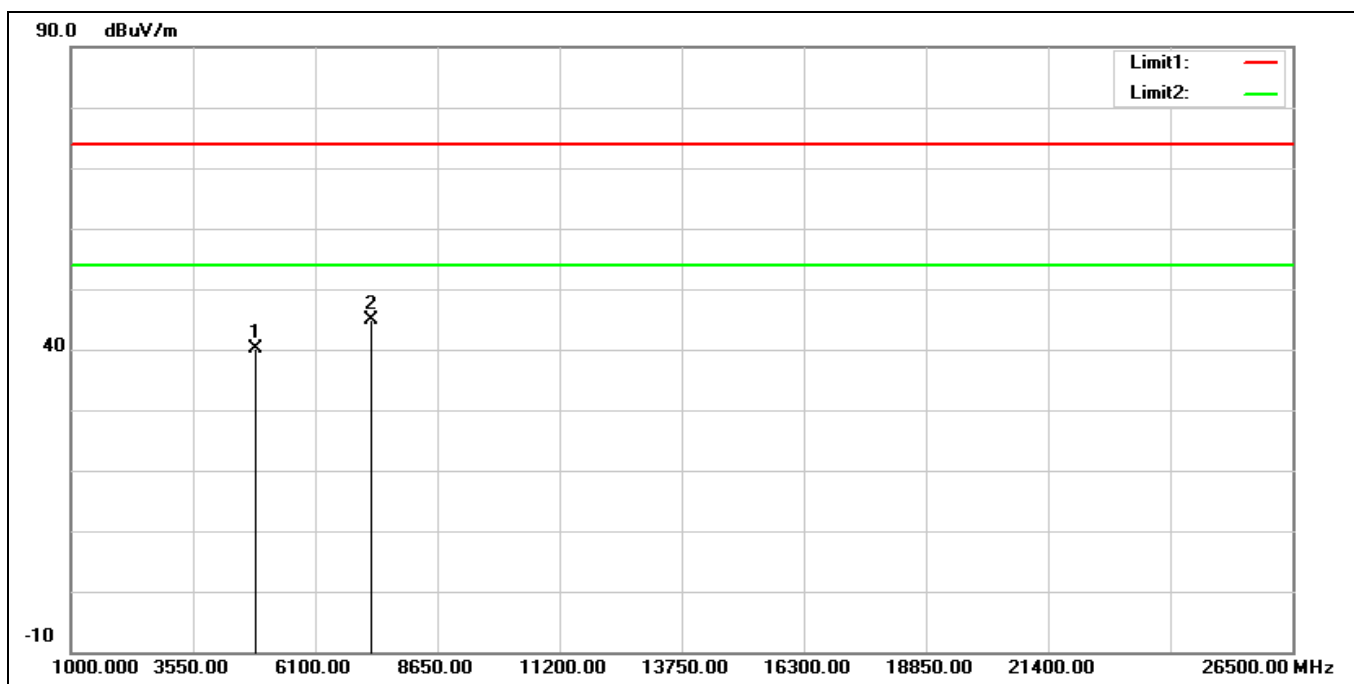


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4854.000	39.84	0.21	40.05	74.00	-33.95	peak
2*	7281.000	37.69	7.15	44.84	74.00	-29.16	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

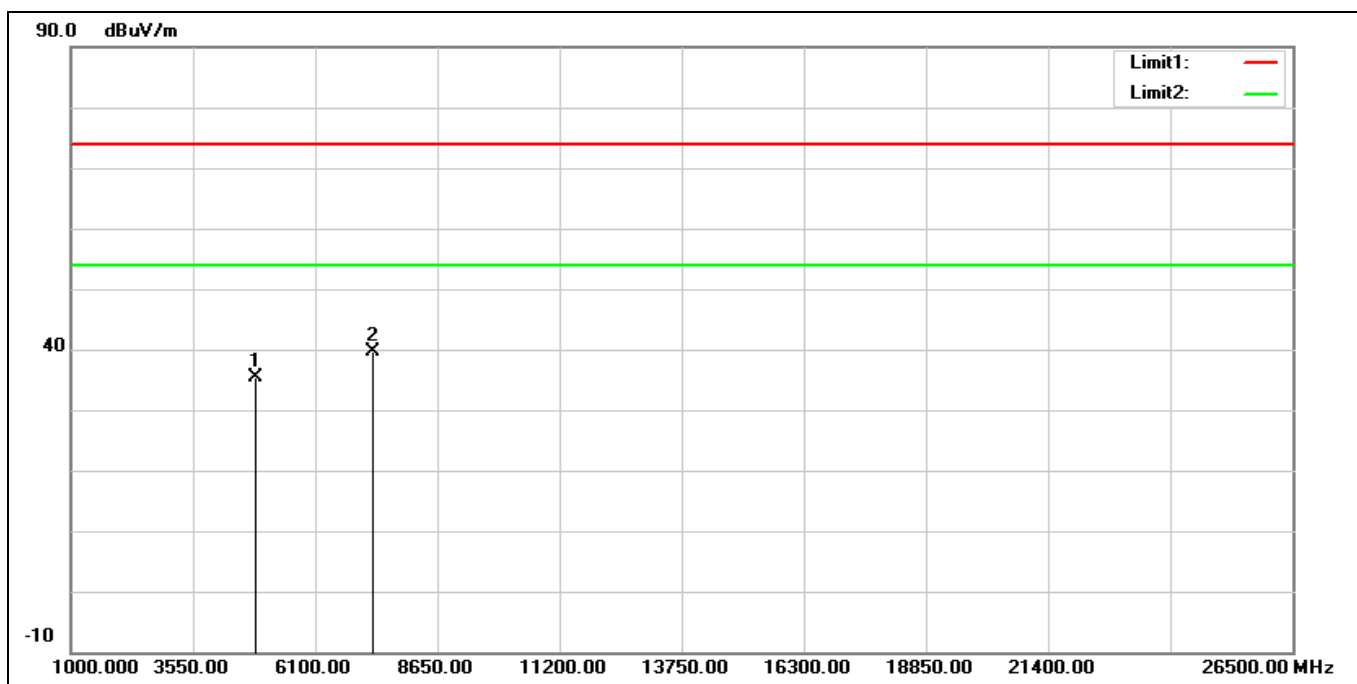


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.12	0.29	35.41	74.00	-38.59	peak
2*	7311.000	32.51	7.16	39.67	74.00	-34.33	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

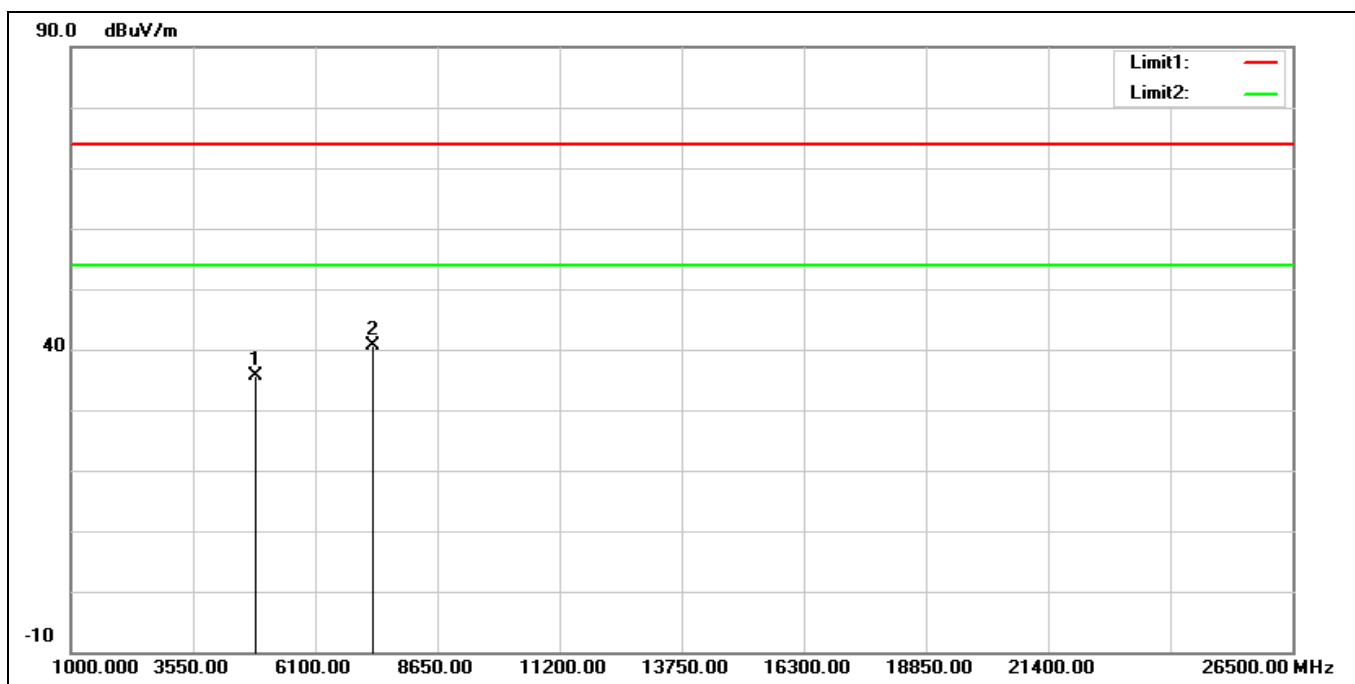


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	35.33	0.29	35.62	74.00	-38.38	peak
2*	7311.000	33.46	7.16	40.62	74.00	-33.38	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2447 MHz		
Remark:			

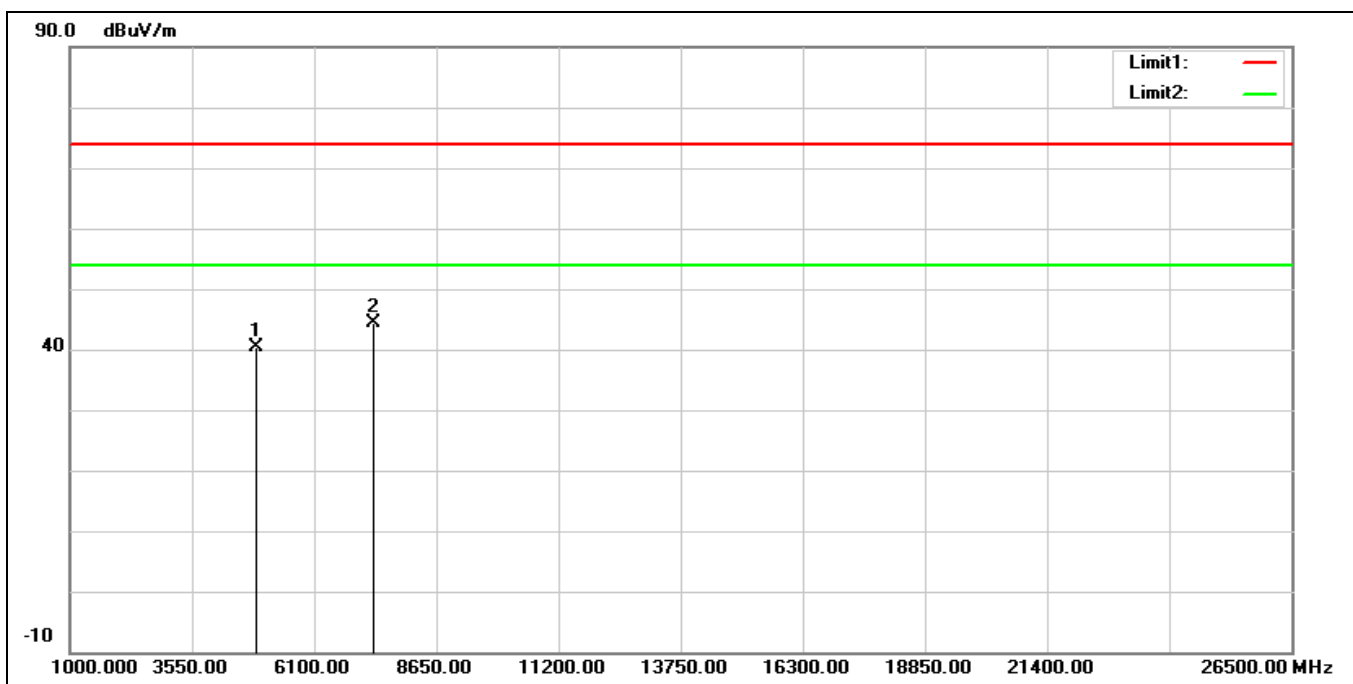


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4894.000	39.96	0.37	40.33	74.00	-33.67	peak
2*	7341.000	37.21	7.25	44.46	74.00	-29.54	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2447 MHz		
Remark:			

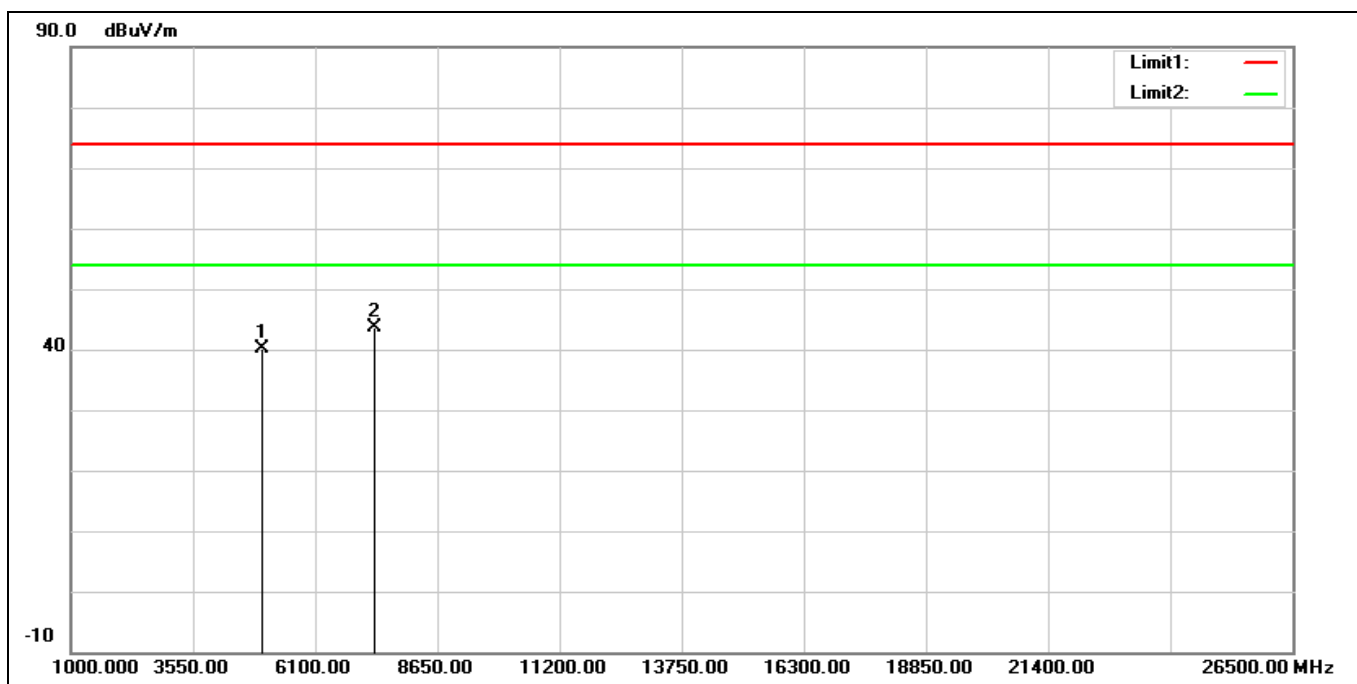


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4984.000	39.66	0.53	40.19	74.00	-33.81	peak
2*	7341.000	36.40	7.25	43.65	74.00	-30.35	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

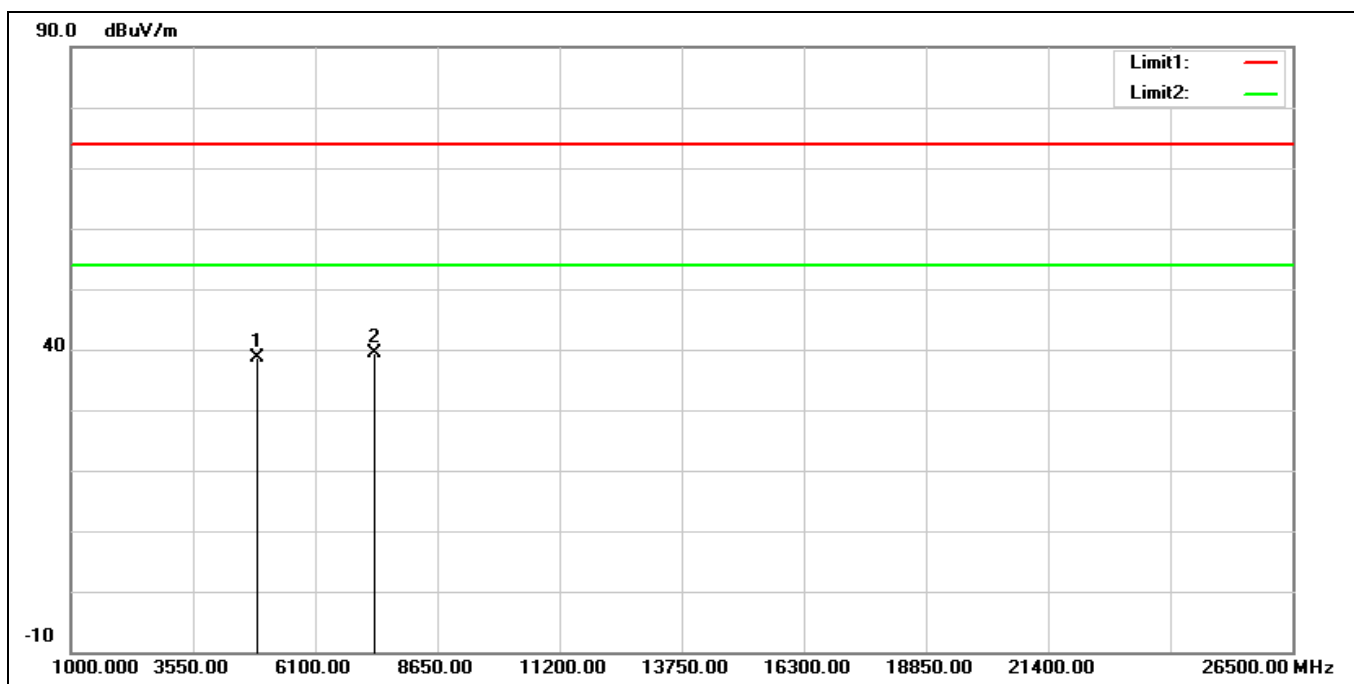


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.32	0.39	38.71	74.00	-35.29	peak
2*	7356.000	32.14	7.31	39.45	74.00	-34.55	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

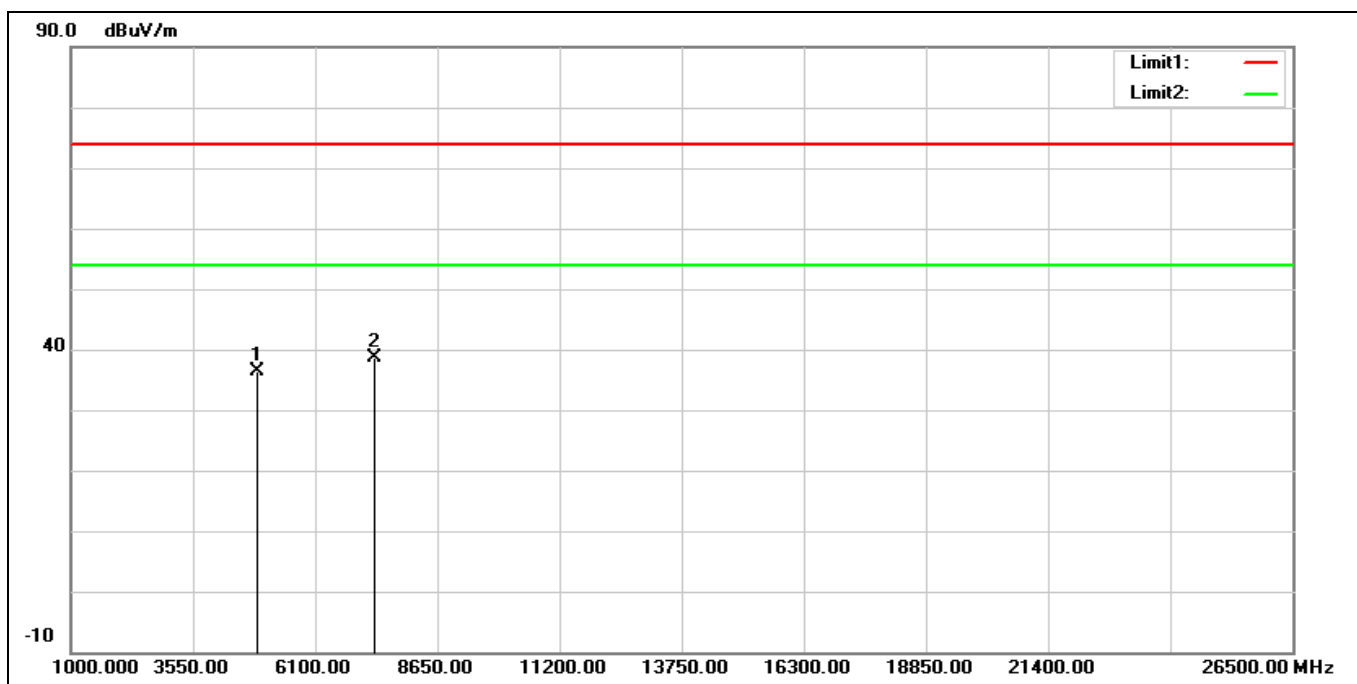


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	36.02	0.39	36.41	74.00	-37.59	peak
2*	7356.000	31.29	7.31	38.60	74.00	-35.40	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

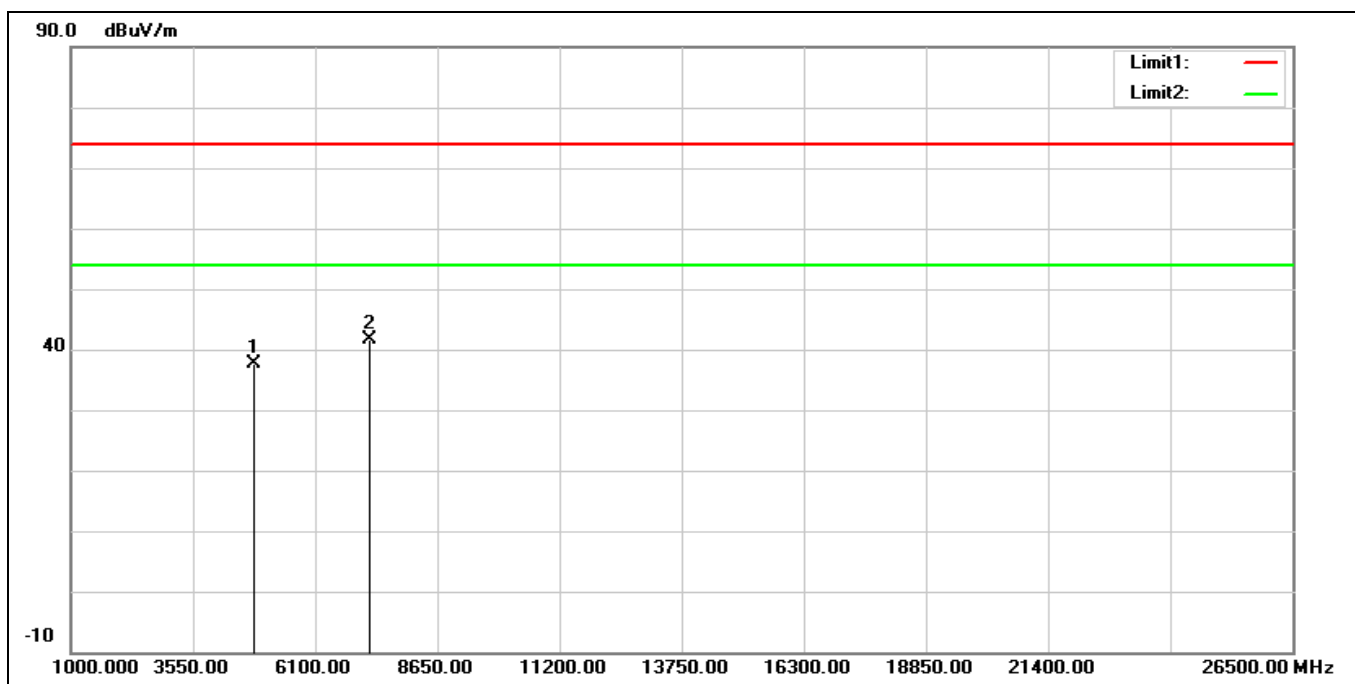


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.46	0.09	37.55	74.00	-36.45	peak
2*	7236.000	34.52	7.13	41.65	74.00	-32.35	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

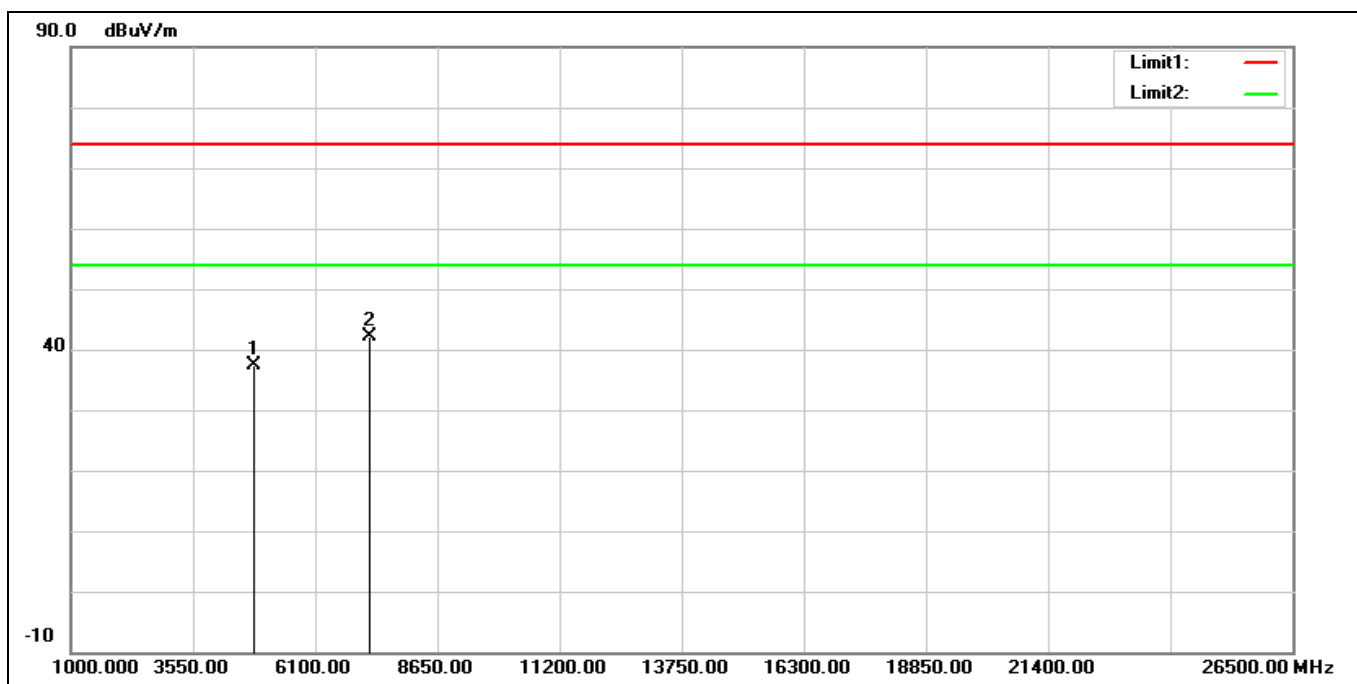


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	37.18	0.09	37.27	74.00	-36.73	peak
2*	7236.000	35.05	7.13	42.18	74.00	-31.82	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2417 MHz		
Remark:			

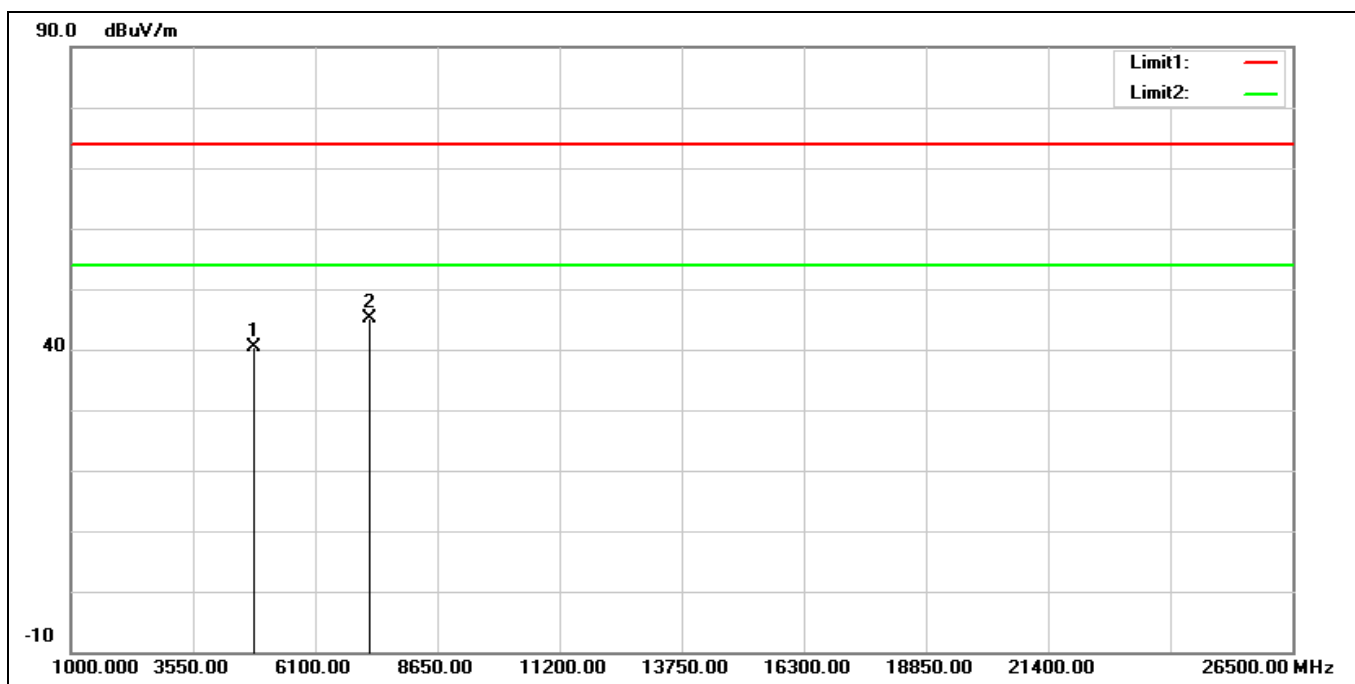


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4834.000	40.19	0.12	40.31	74.00	-33.69	peak
2*	7251.000	38.07	7.18	45.25	74.00	-28.75	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2417 MHz		
Remark:			

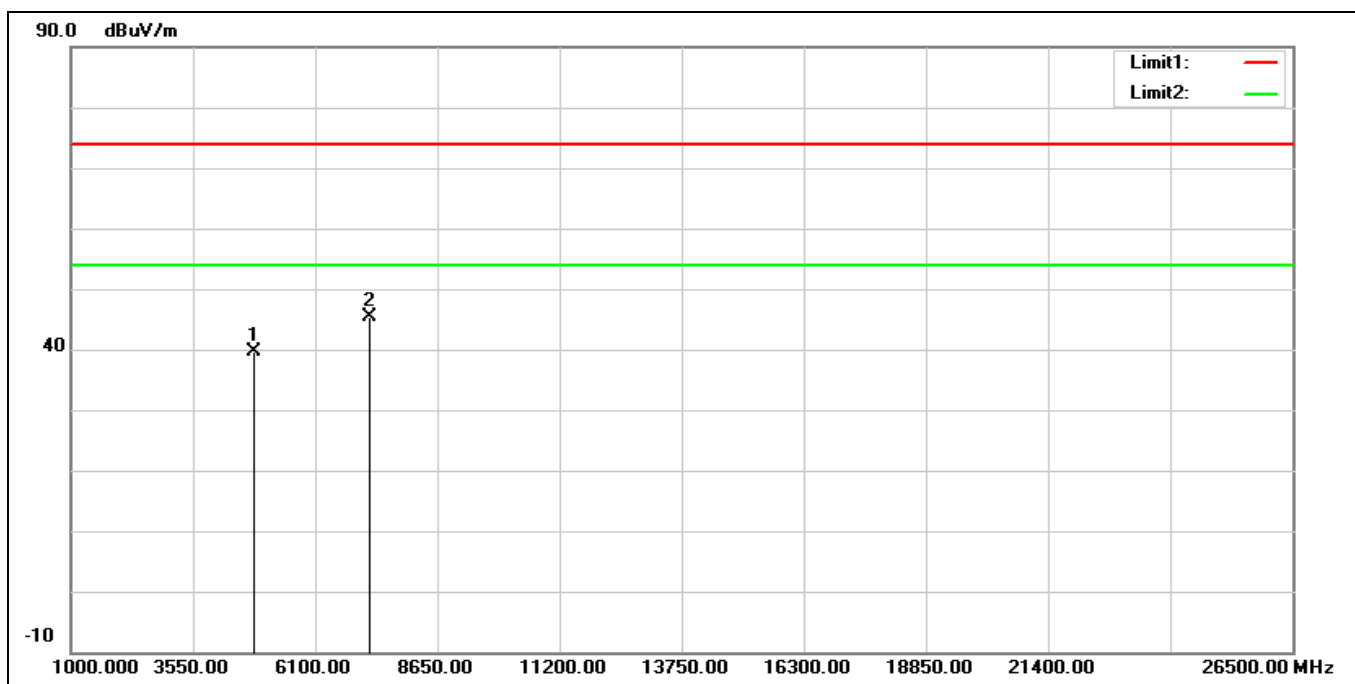


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4834.000	39.58	0.12	39.70	74.00	-34.30	peak
2*	7251.000	38.22	7.18	45.40	74.00	-28.60	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

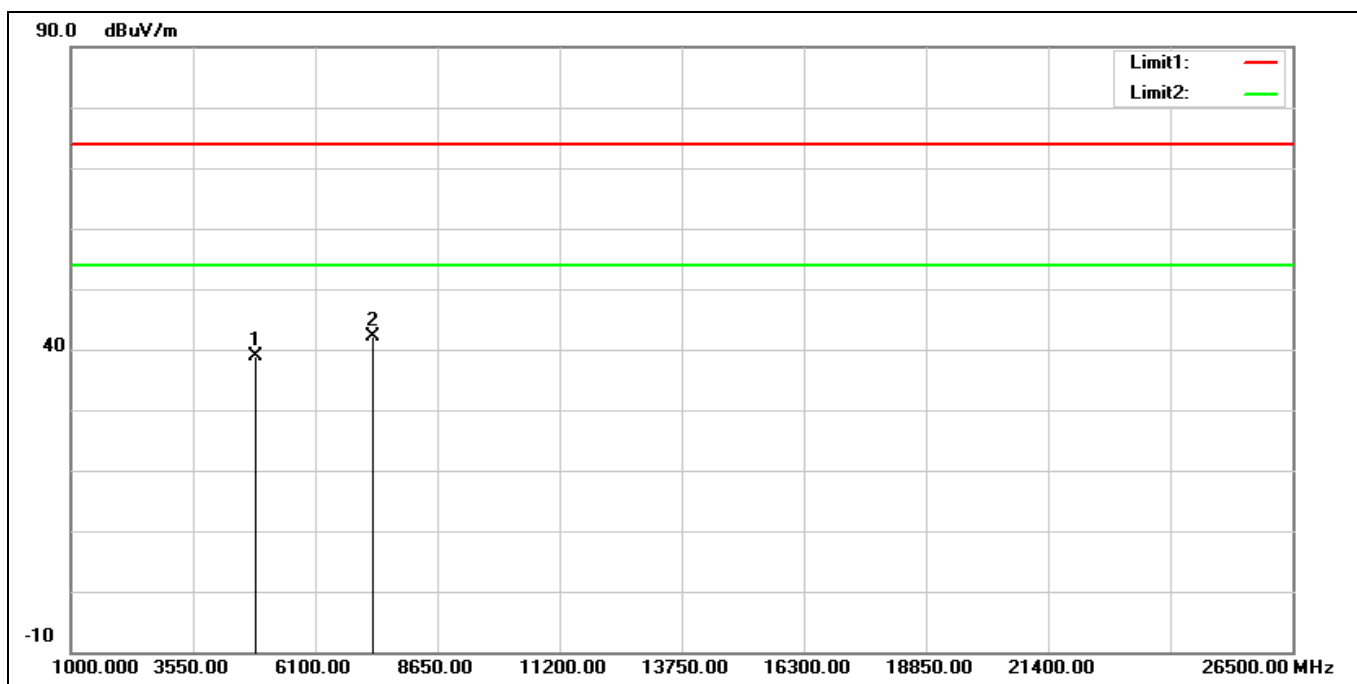


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.67	0.29	38.96	74.00	-35.04	peak
2*	7311.000	34.92	7.16	42.08	74.00	-31.92	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

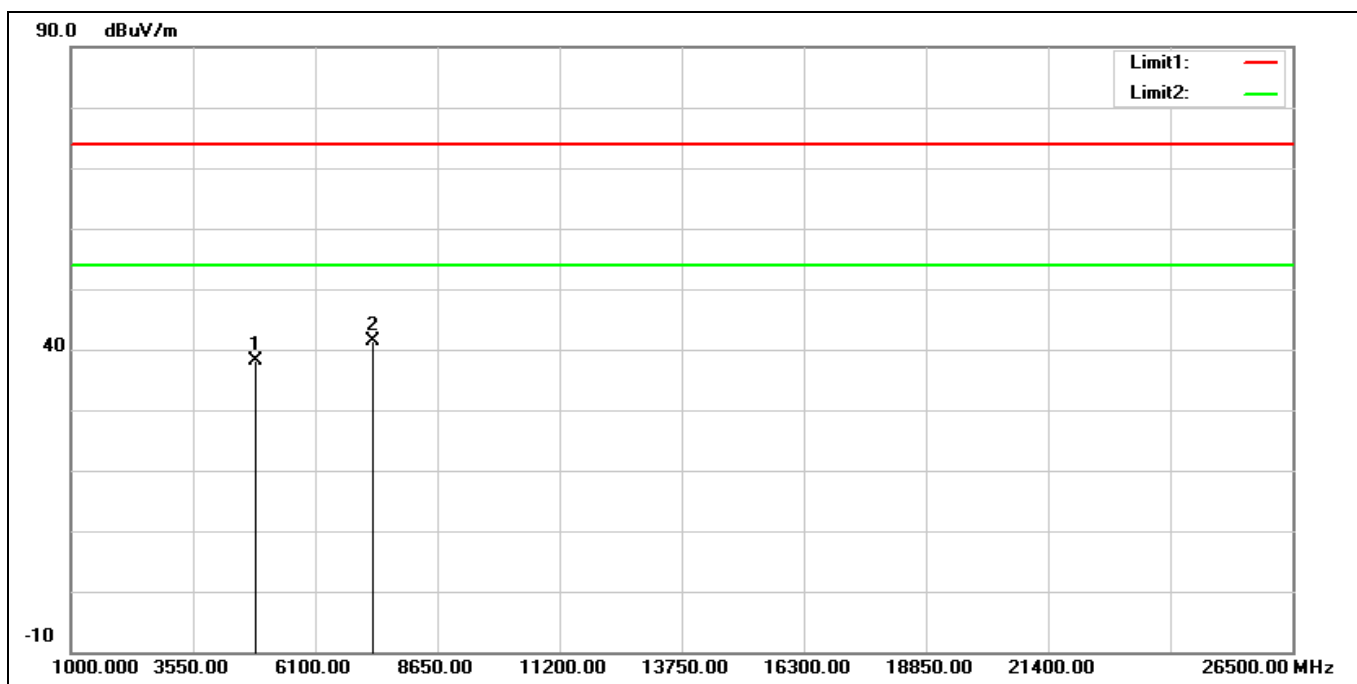


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.90	0.29	38.19	74.00	-35.81	peak
2*	7311.000	34.20	7.16	41.36	74.00	-32.64	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

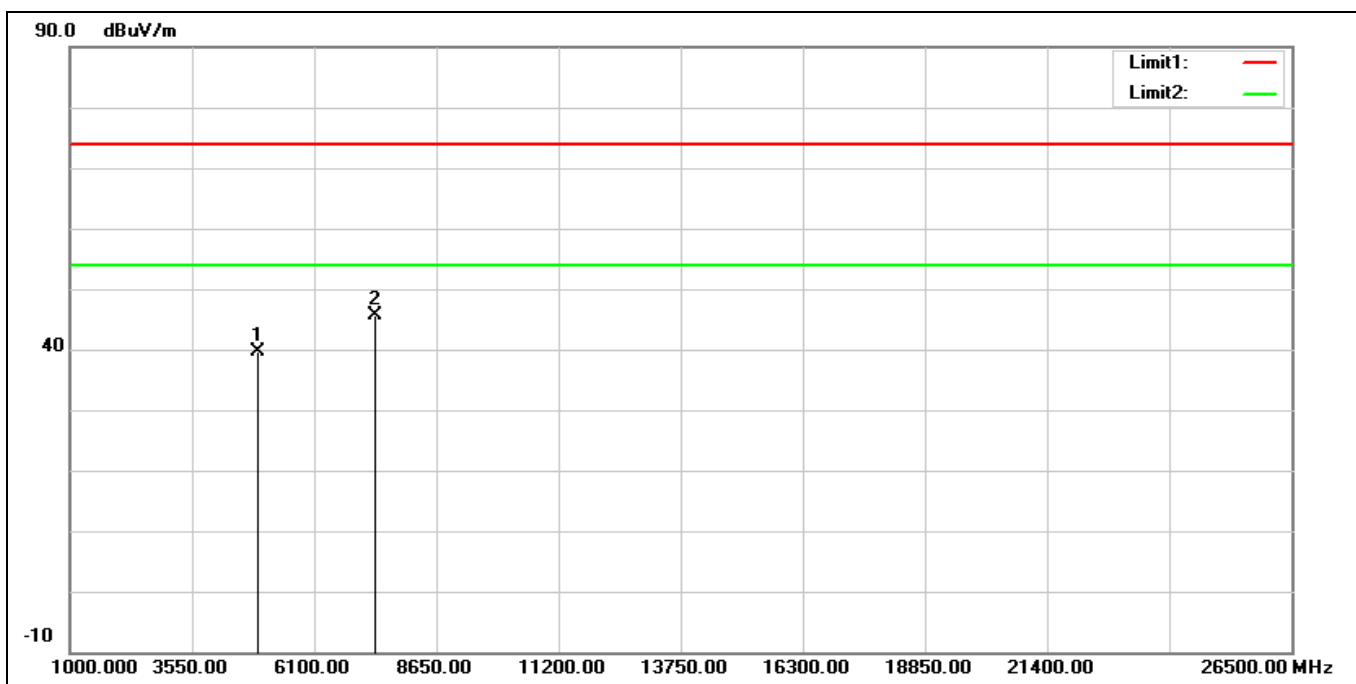


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	39.27	0.39	39.66	74.00	-34.34	peak
2*	7371.000	38.28	7.39	45.67	74.00	-28.33	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

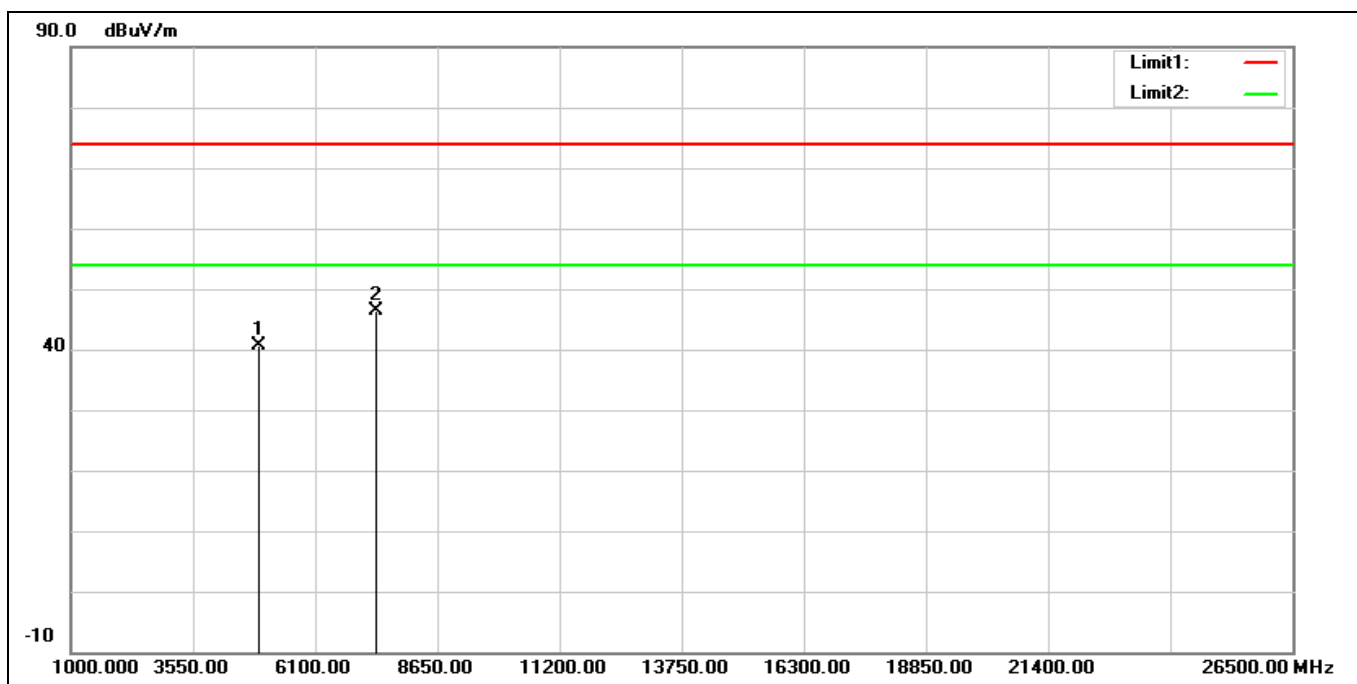


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4914.000	40.19	0.39	40.58	74.00	-33.42	peak
2*	7371.000	38.91	7.39	46.30	74.00	-27.70	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

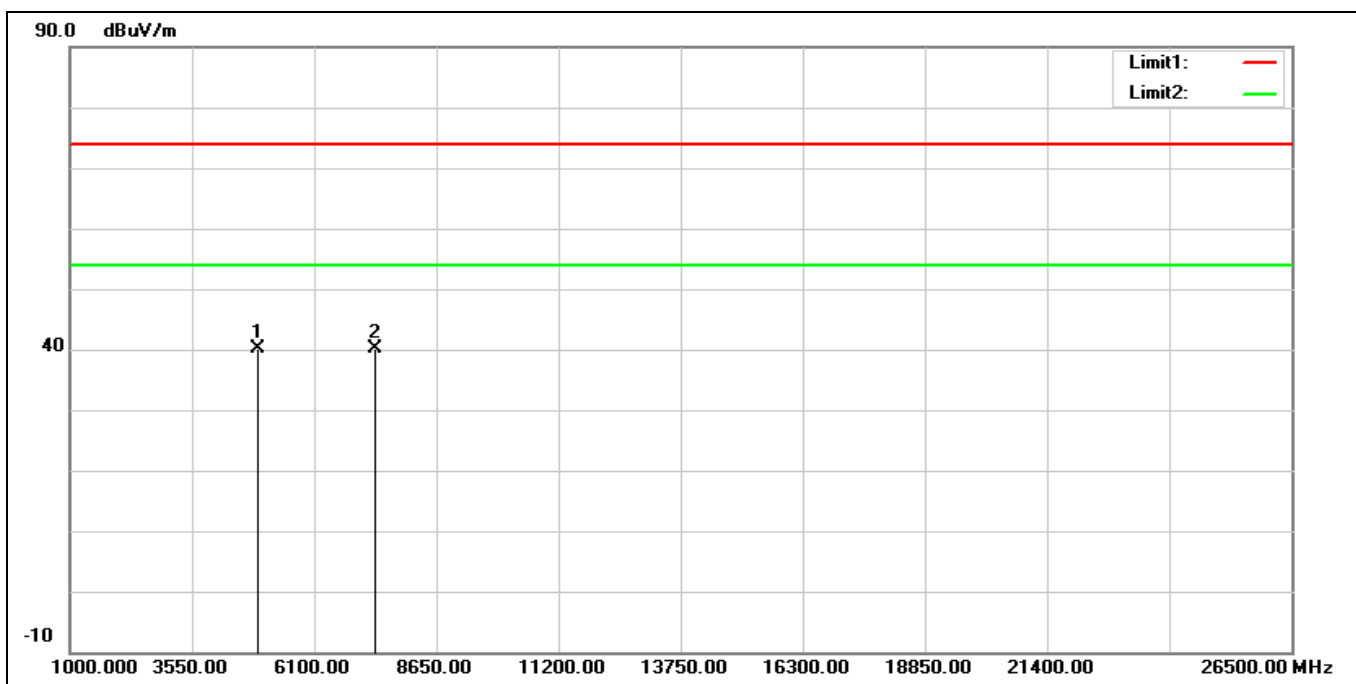


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	4924.000	39.83	0.39	40.22	74.00	-33.78	peak
2	7386.000	32.74	7.46	40.20	74.00	-33.80	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

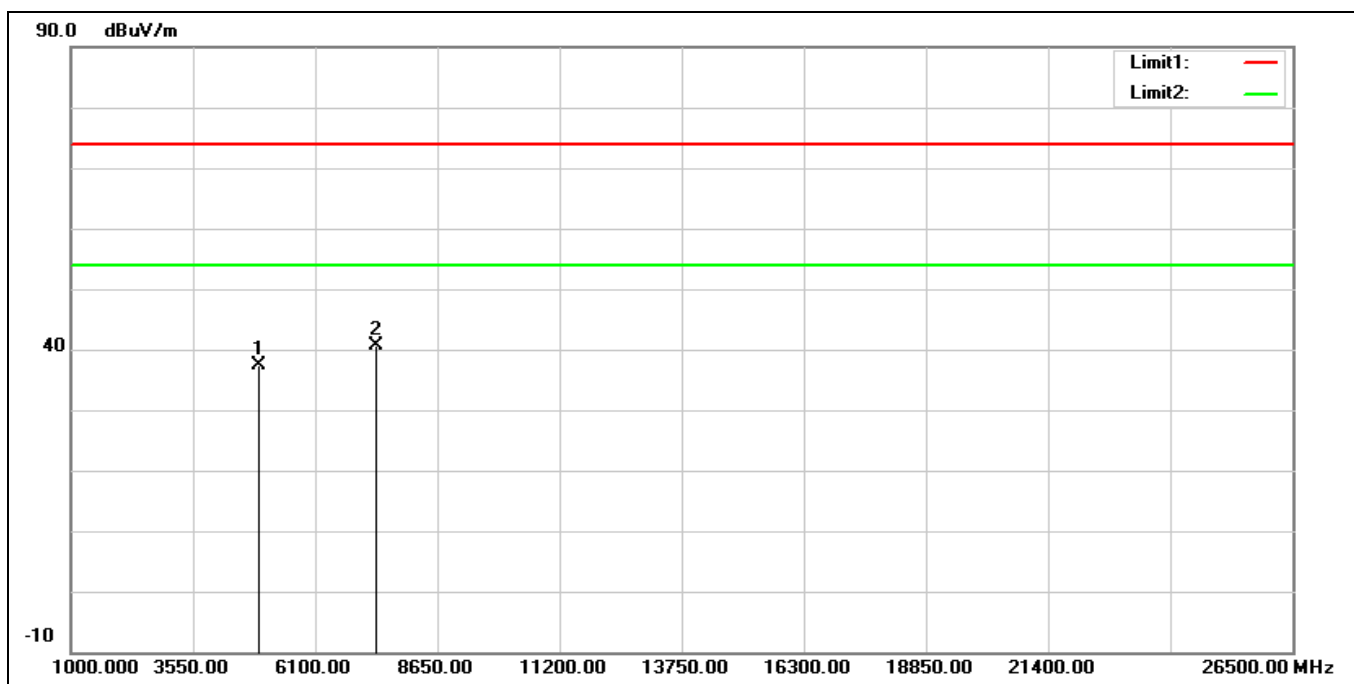


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	37.00	0.39	37.39	74.00	-36.61	peak
2*	7386.000	33.29	7.46	40.75	74.00	-33.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

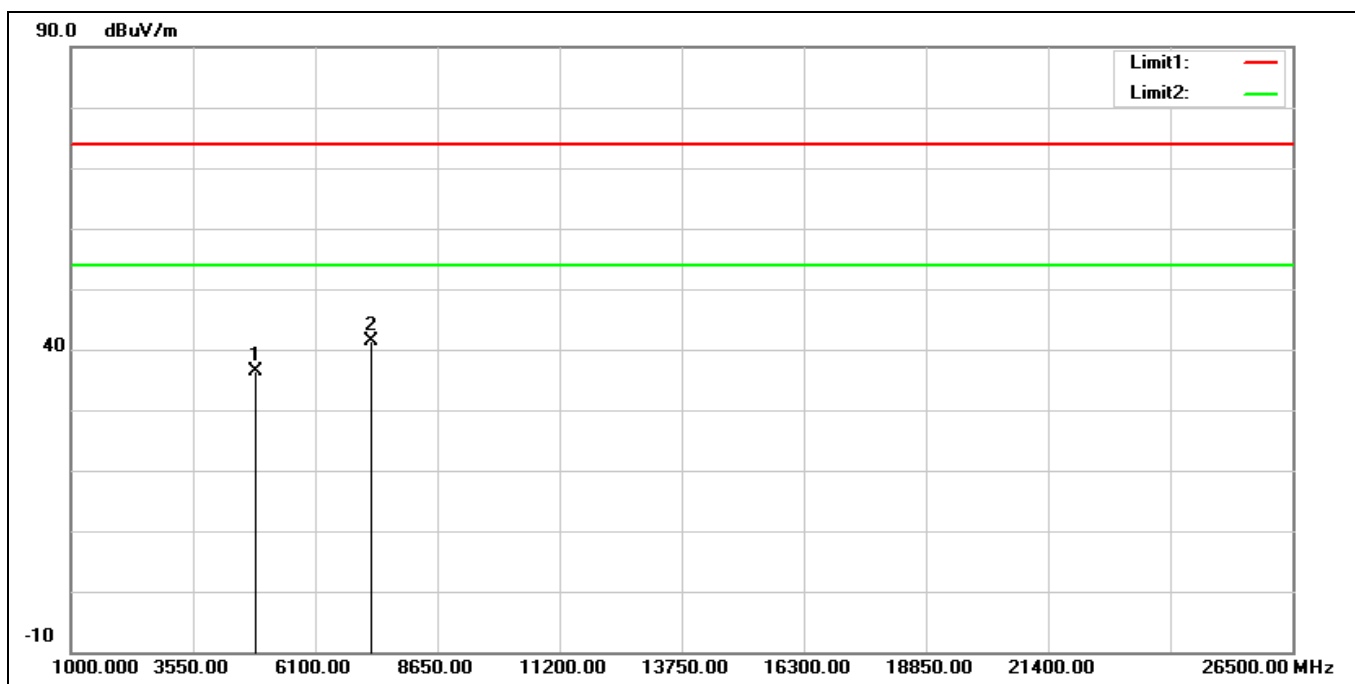


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.29	0.16	36.45	74.00	-37.55	peak
2*	7266.000	34.30	7.16	41.46	74.00	-32.54	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

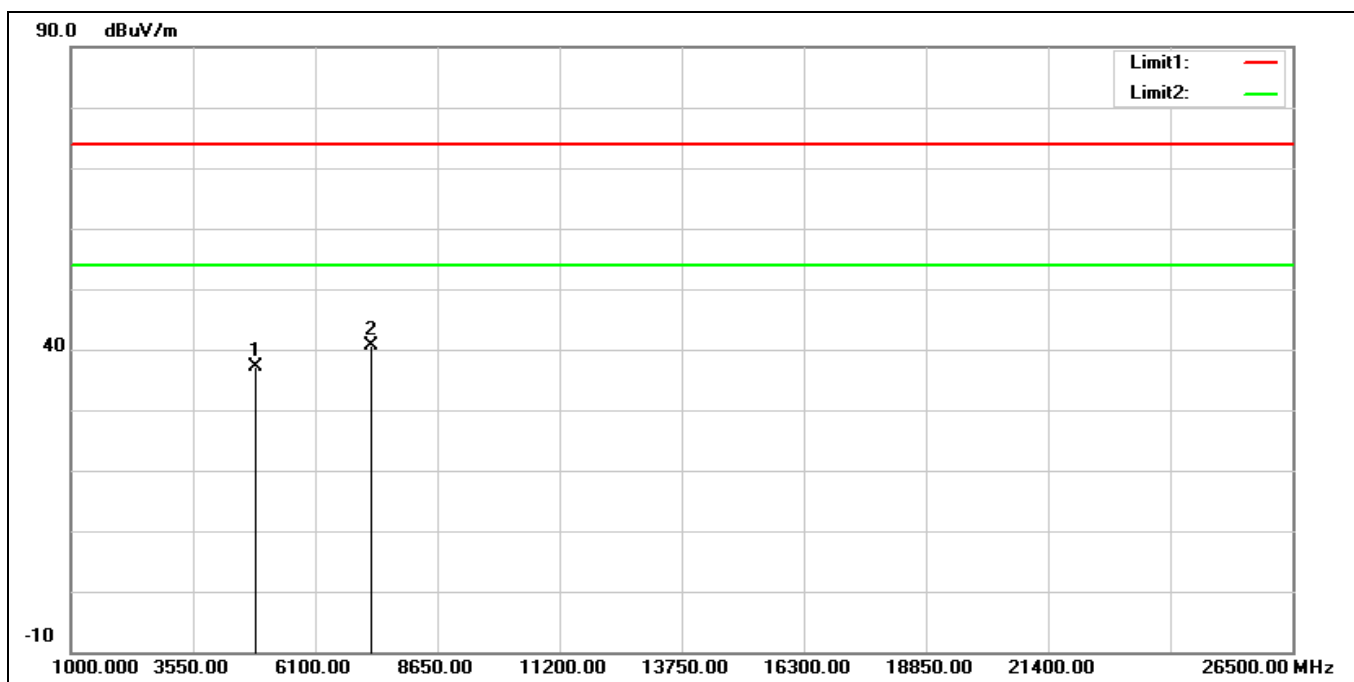


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	37.01	0.16	37.17	74.00	-36.83	peak
2*	7266.000	33.53	7.16	40.69	74.00	-33.31	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2427 MHz		
Remark:			

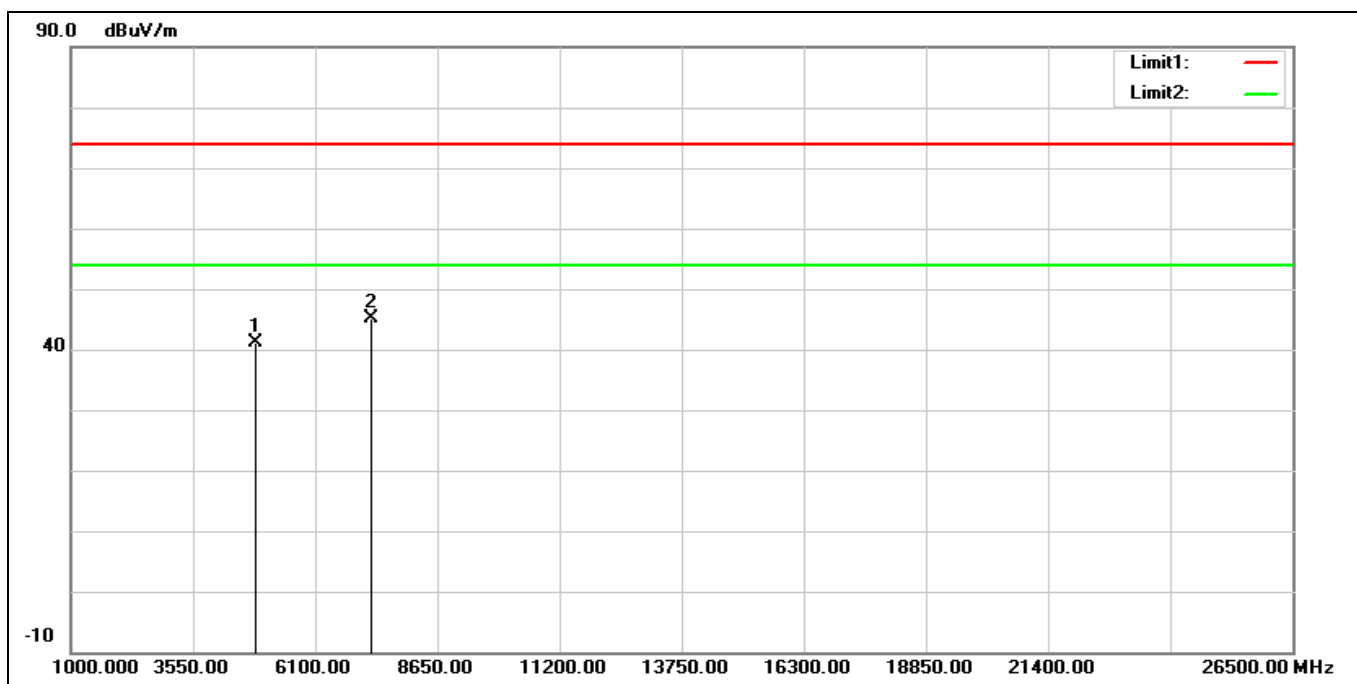


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4854.000	41.02	0.21	41.23	74.00	-32.77	peak
2*	7281.000	37.86	7.15	45.01	74.00	-28.99	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2427 MHz		
Remark:			

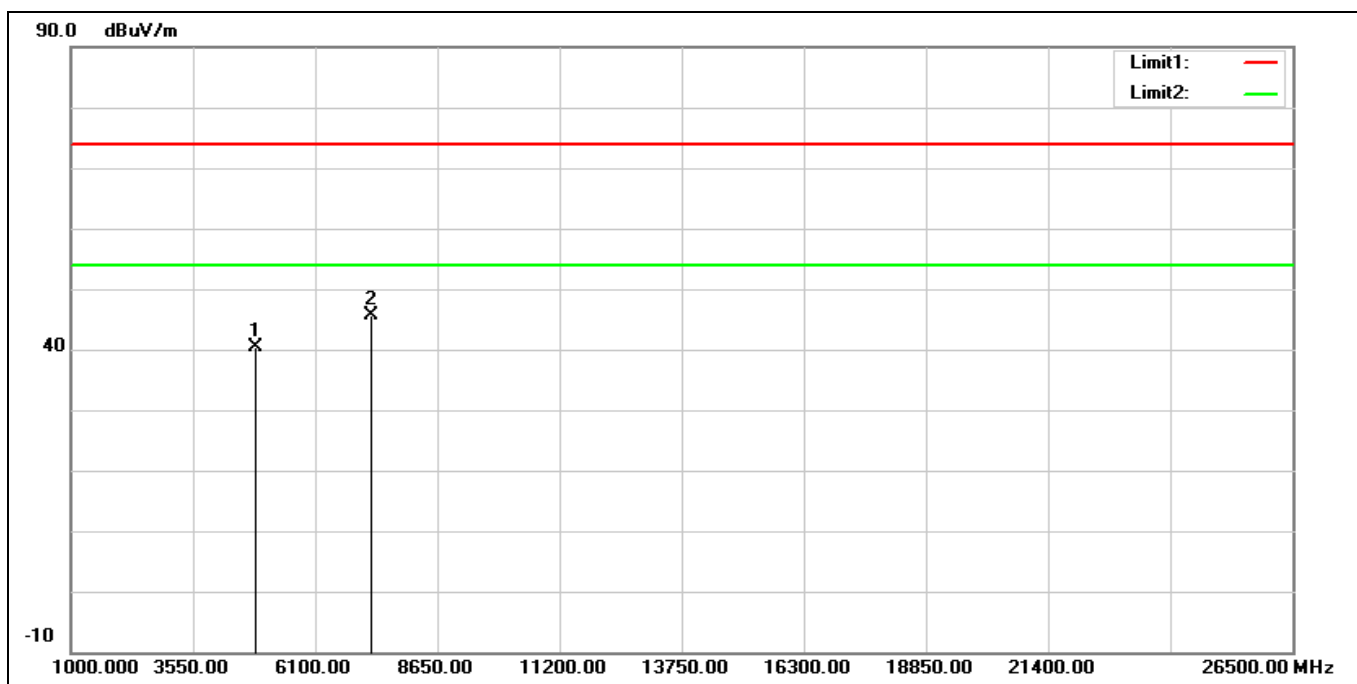


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4854.000	40.18	0.21	40.39	74.00	-33.61	peak
2*	7281.000	38.60	7.15	45.75	74.00	-28.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

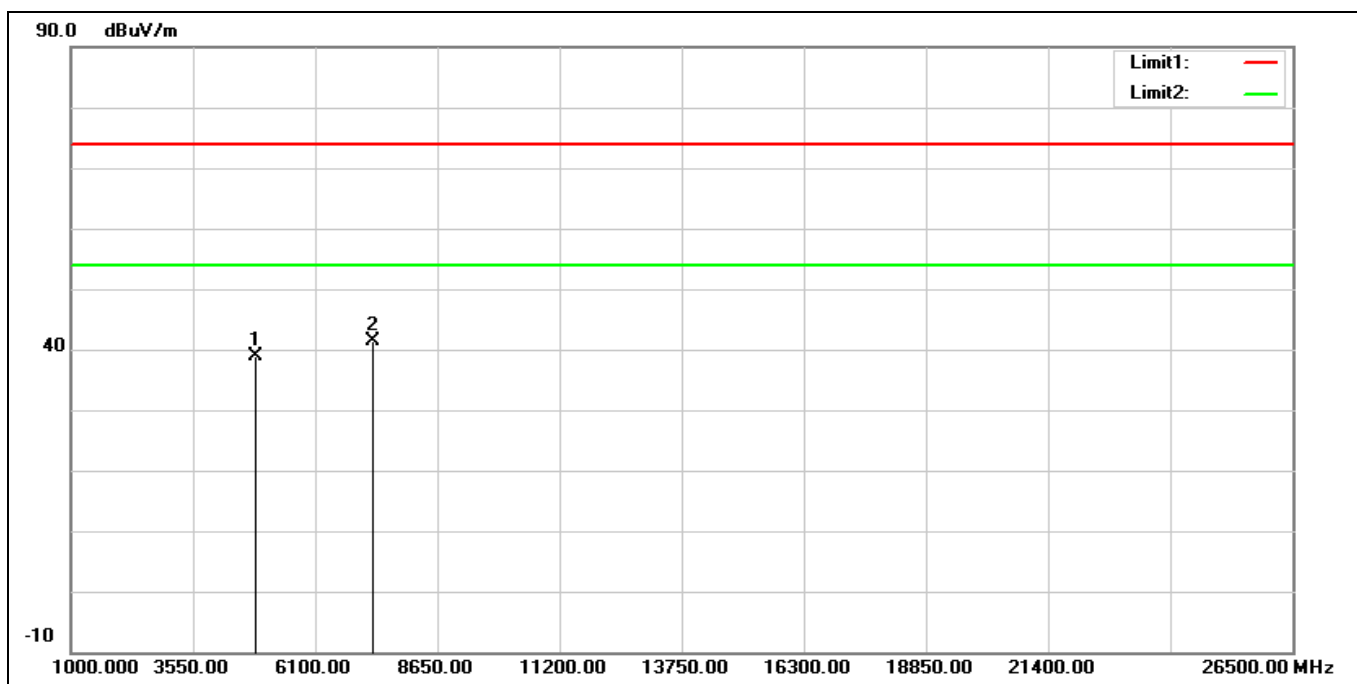


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.65	0.29	38.94	74.00	-35.06	peak
2*	7311.000	34.22	7.16	41.38	74.00	-32.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

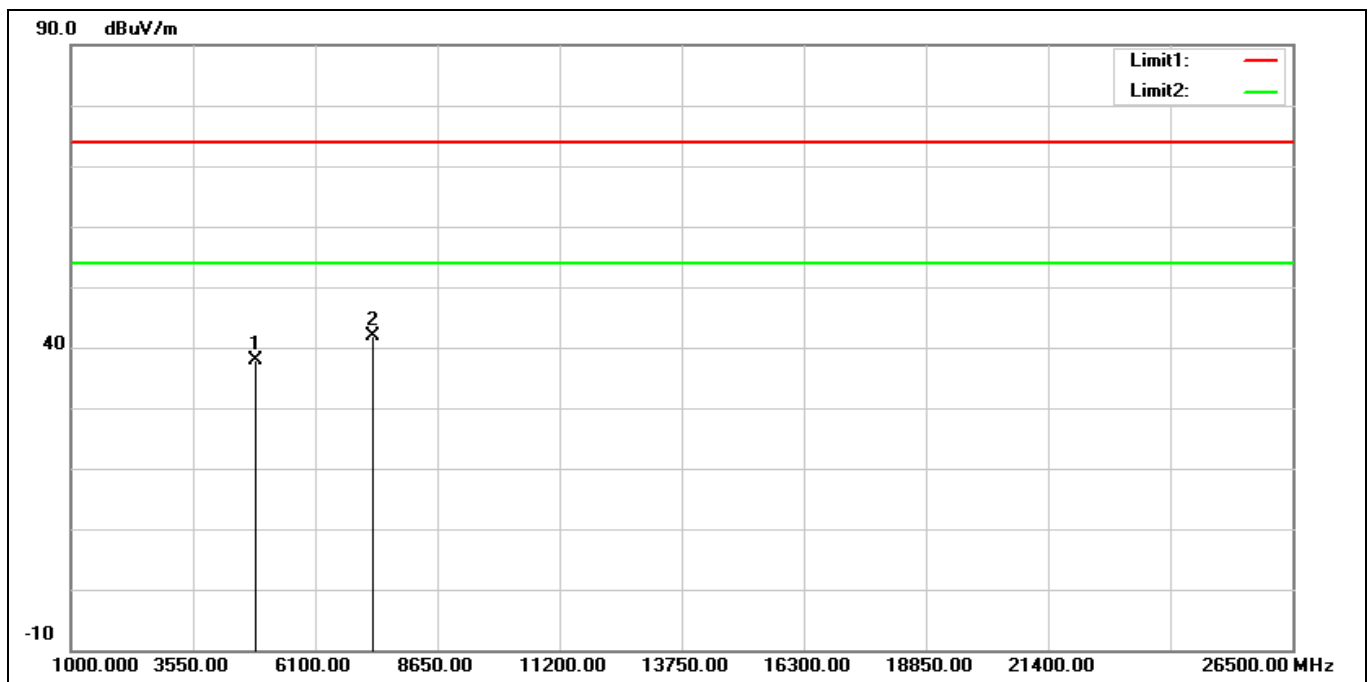


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.65	0.29	37.94	74.00	-36.06	peak
2*	7311.000	34.65	7.16	41.81	74.00	-32.19	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2447 MHz		
Remark:			

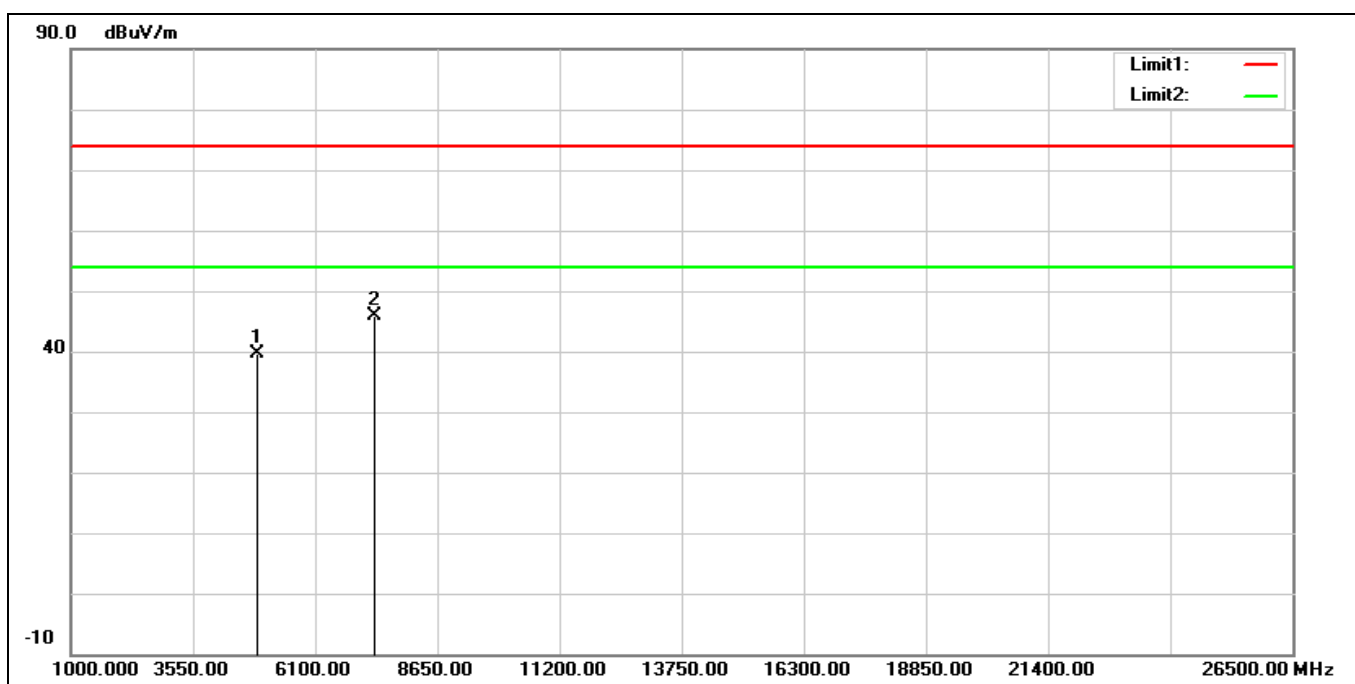


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4894.000	39.19	0.37	39.56	74.00	-34.44	peak
2*	7341.000	38.72	7.25	45.97	74.00	-28.03	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2447 MHz		
Remark:			

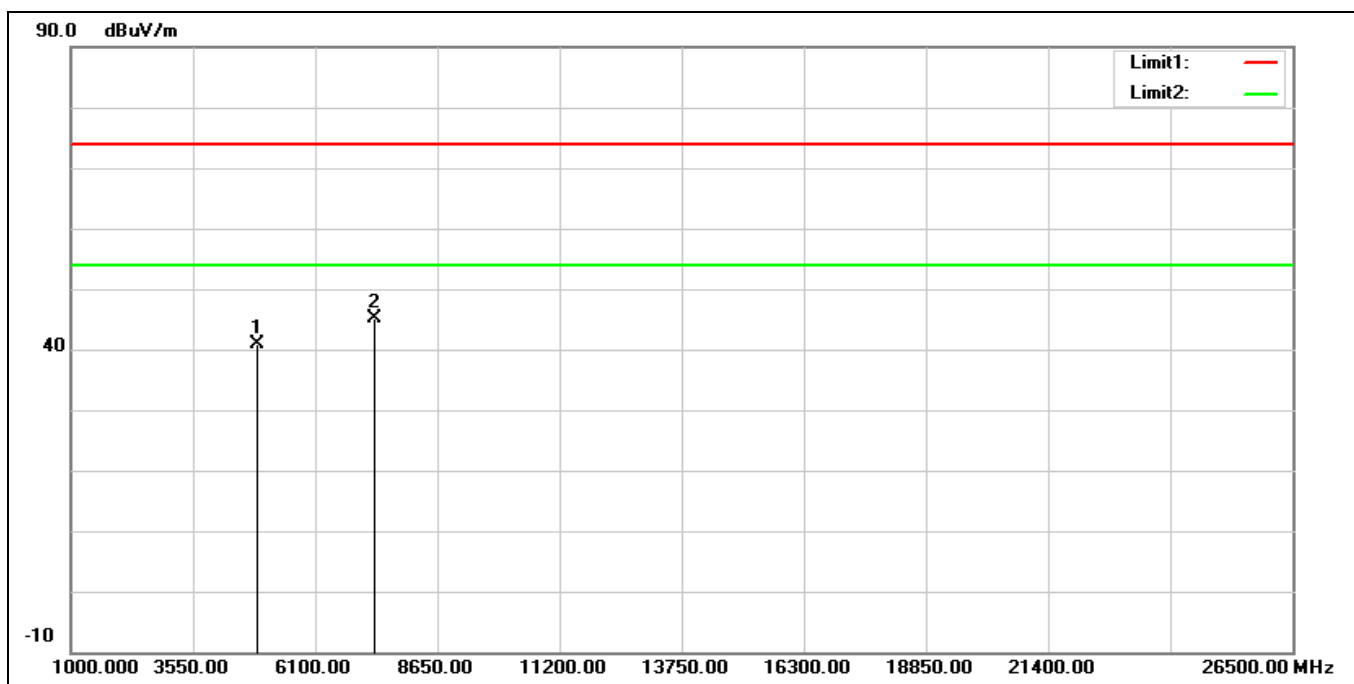


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4894.000	40.50	0.37	40.87	74.00	-33.13	peak
2*	7341.000	37.97	7.25	45.22	74.00	-28.78	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

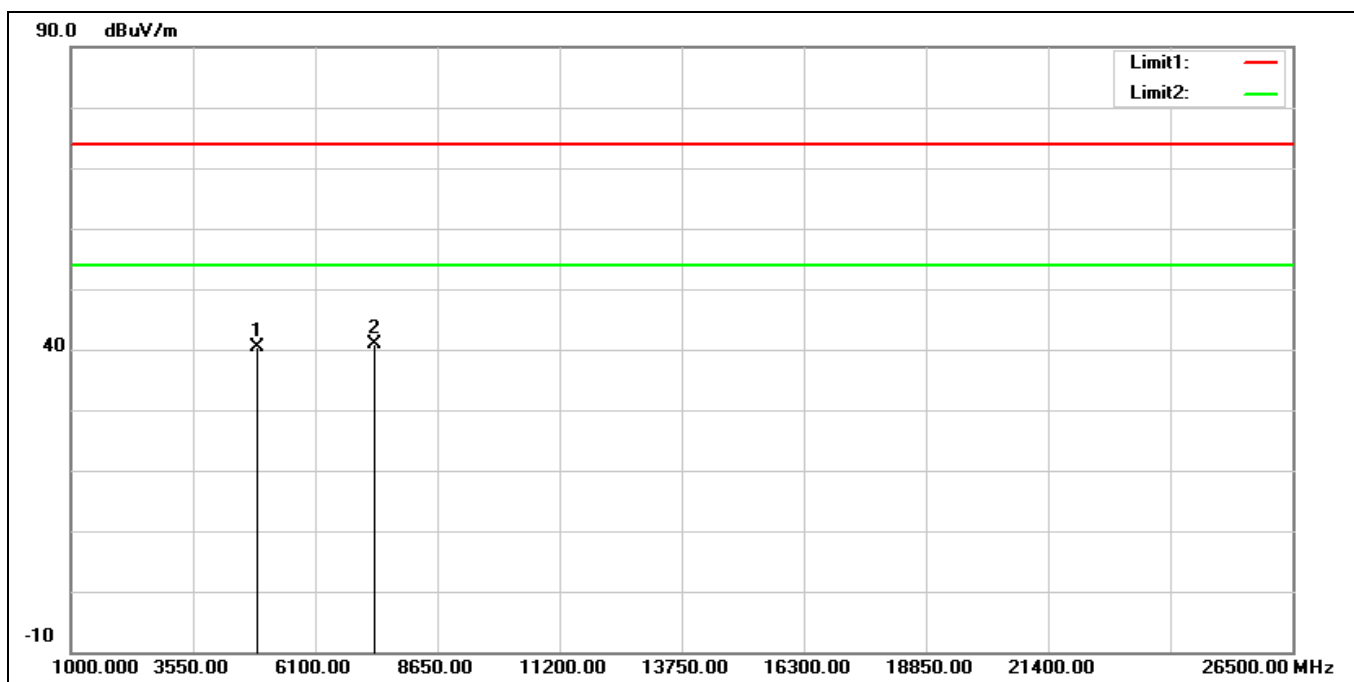


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	40.04	0.39	40.43	74.00	-33.57	peak
2*	7356.000	33.65	7.31	40.96	74.00	-33.04	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

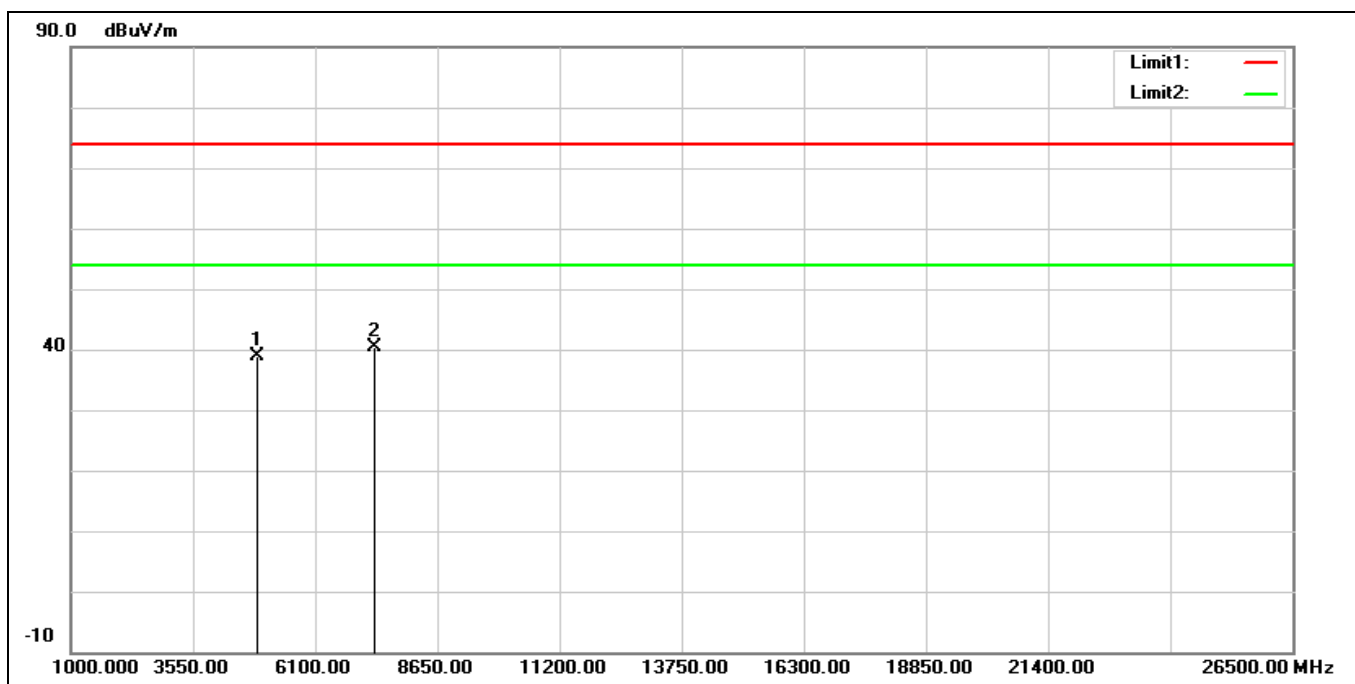


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	38.39	0.39	38.78	74.00	-35.22	peak
2*	7356.000	33.16	7.31	40.47	74.00	-33.53	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

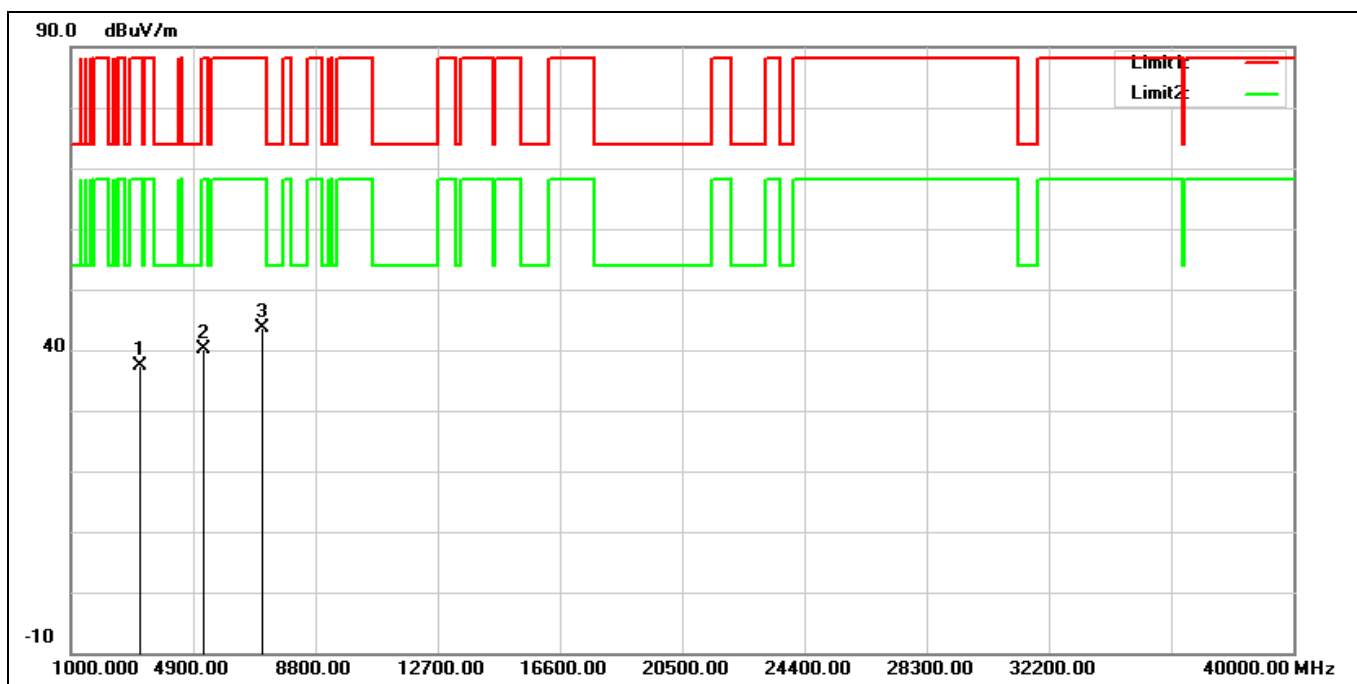

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3159.000	41.56	-4.16	37.40	88.20	-50.80	peak
2	5182.000	39.02	1.23	40.25	88.20	-47.95	peak
3*	7103.000	36.95	6.63	43.58	88.20	-44.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

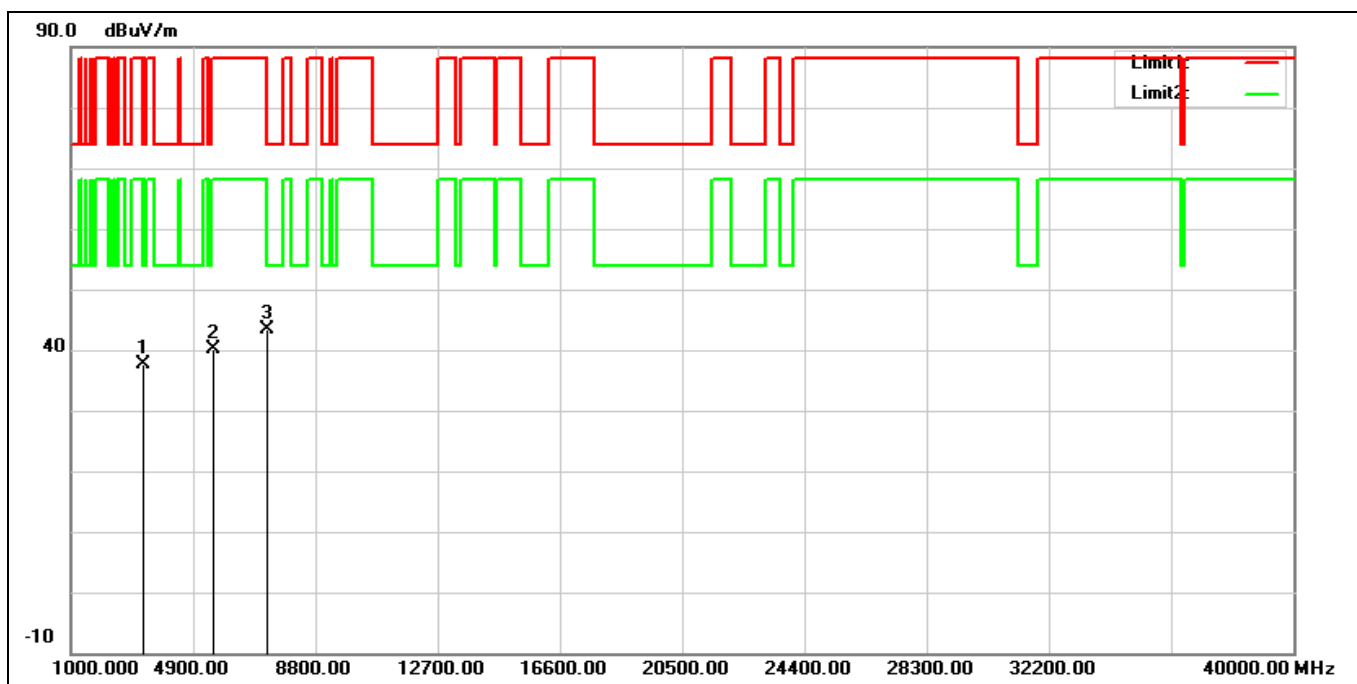


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3278.000	42.06	-4.48	37.58	88.20	-50.62	peak
2	5505.000	38.40	1.79	40.19	88.20	-48.01	peak
3*	7239.000	36.27	7.15	43.42	88.20	-44.78	peak

Band Edge


Peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2412 MHz		
Remark:			

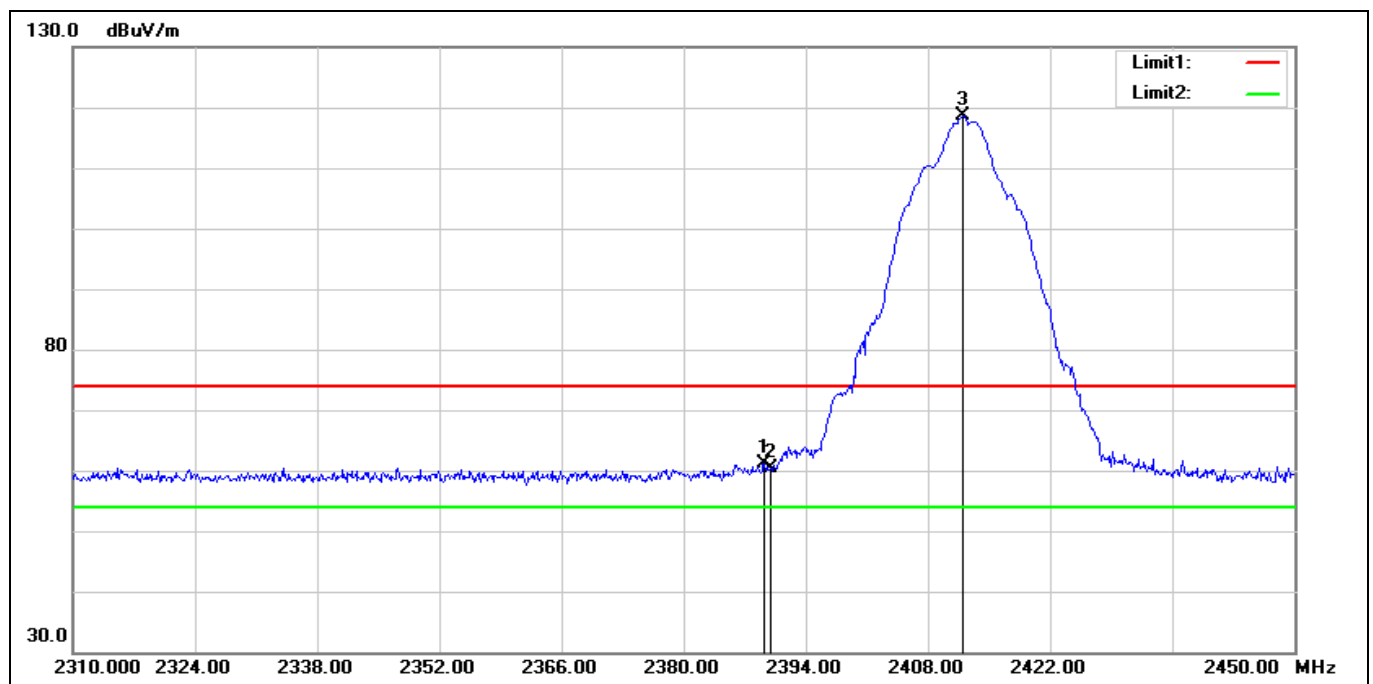


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.240	67.23	-6.09	61.14	74.00	-12.86	peak
2	2390.000	66.56	-6.09	60.47	74.00	-13.53	peak
3*	2412.060	124.72	-6.10	118.62	74.00	44.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

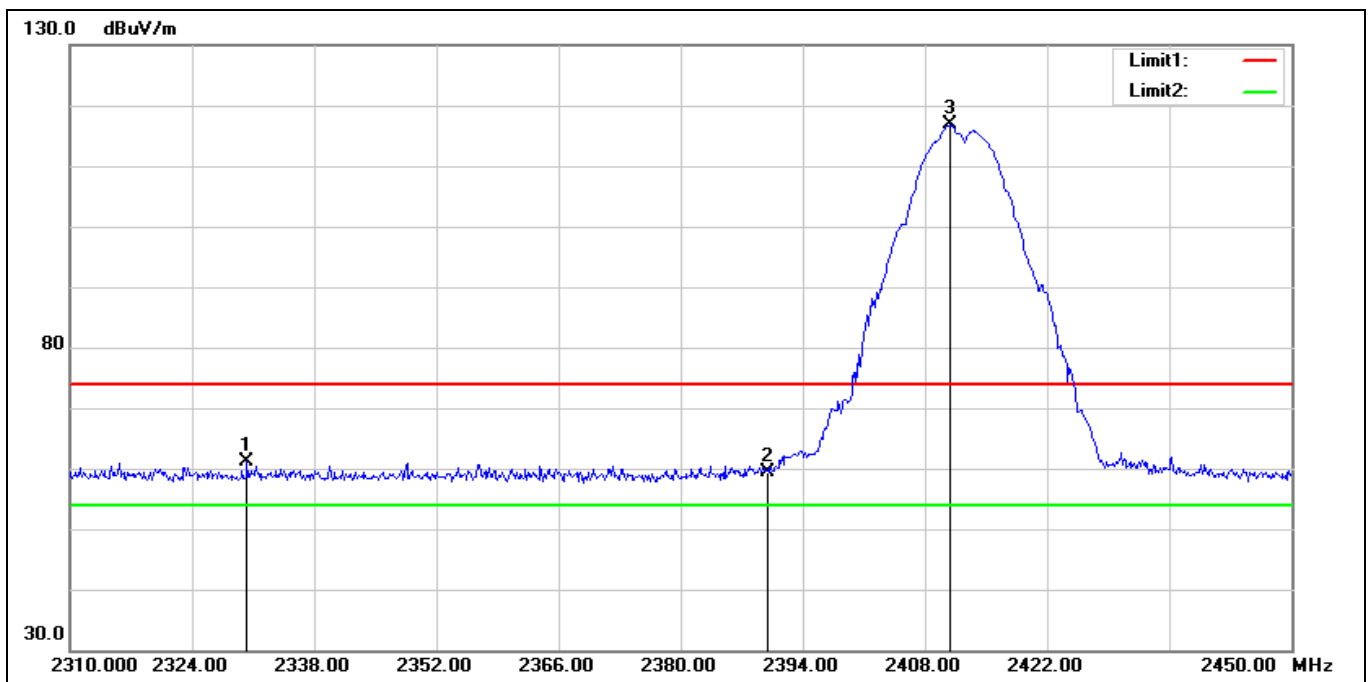


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2330.300	66.93	-5.92	61.01	74.00	-12.99	peak
2	2390.000	65.42	-6.09	59.33	74.00	-14.67	peak
3*	2410.940	122.86	-6.10	116.76	74.00	42.76	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

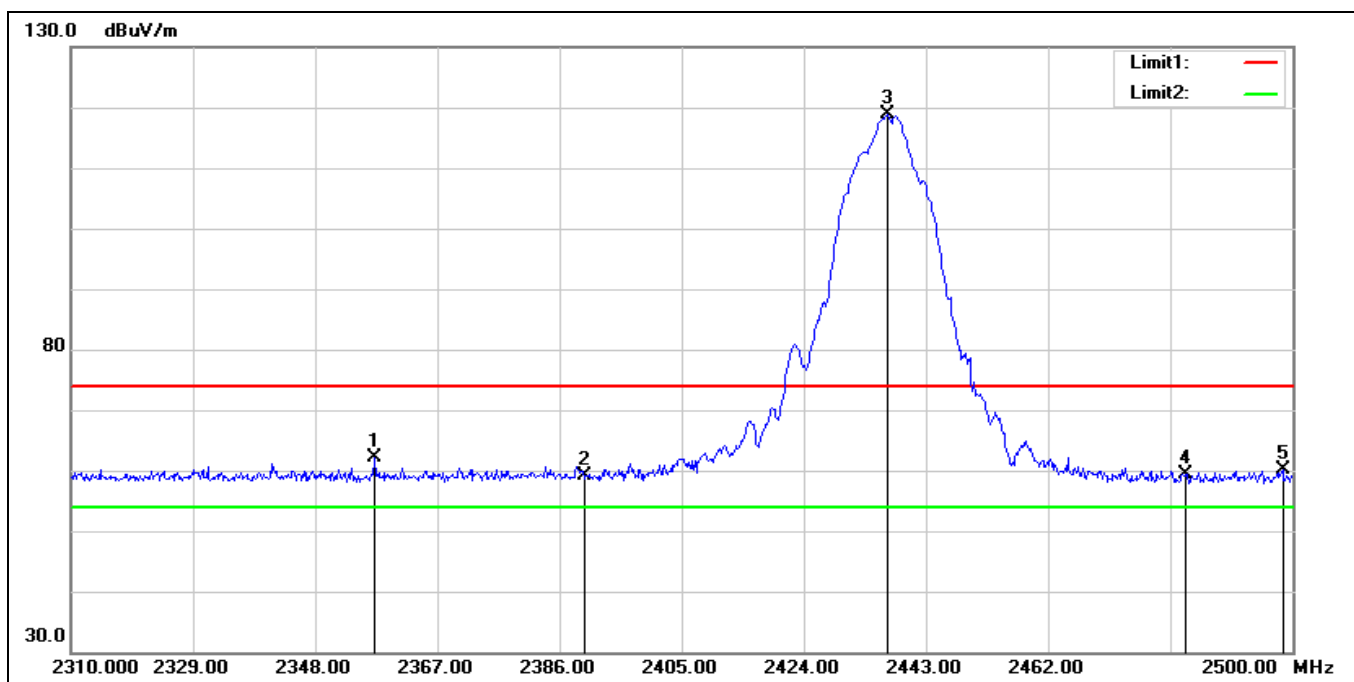


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2357.310	67.97	-5.94	62.03	74.00	-11.97	peak
2	2390.000	65.30	-6.09	59.21	74.00	-14.79	peak
3*	2436.920	124.99	-6.02	118.97	74.00	44.97	peak
4	2483.500	65.49	-6.13	59.36	74.00	-14.64	peak
5	2498.480	66.22	-6.20	60.02	74.00	-13.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

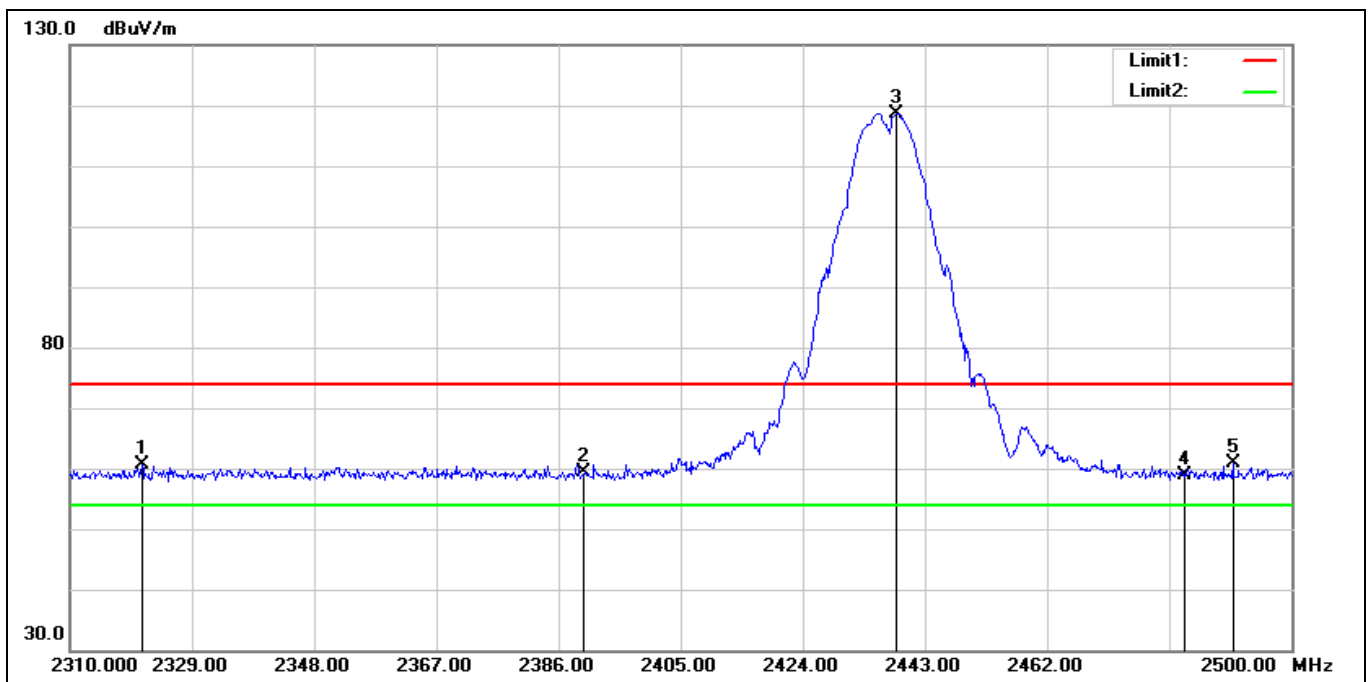


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2321.210	66.45	-5.94	60.51	74.00	-13.49	peak
2	2390.000	65.57	-6.09	59.48	74.00	-14.52	peak
3*	2438.630	124.73	-6.01	118.72	74.00	44.72	peak
4	2483.500	64.95	-6.13	58.82	74.00	-15.18	peak
5	2490.880	67.02	-6.17	60.85	74.00	-13.15	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

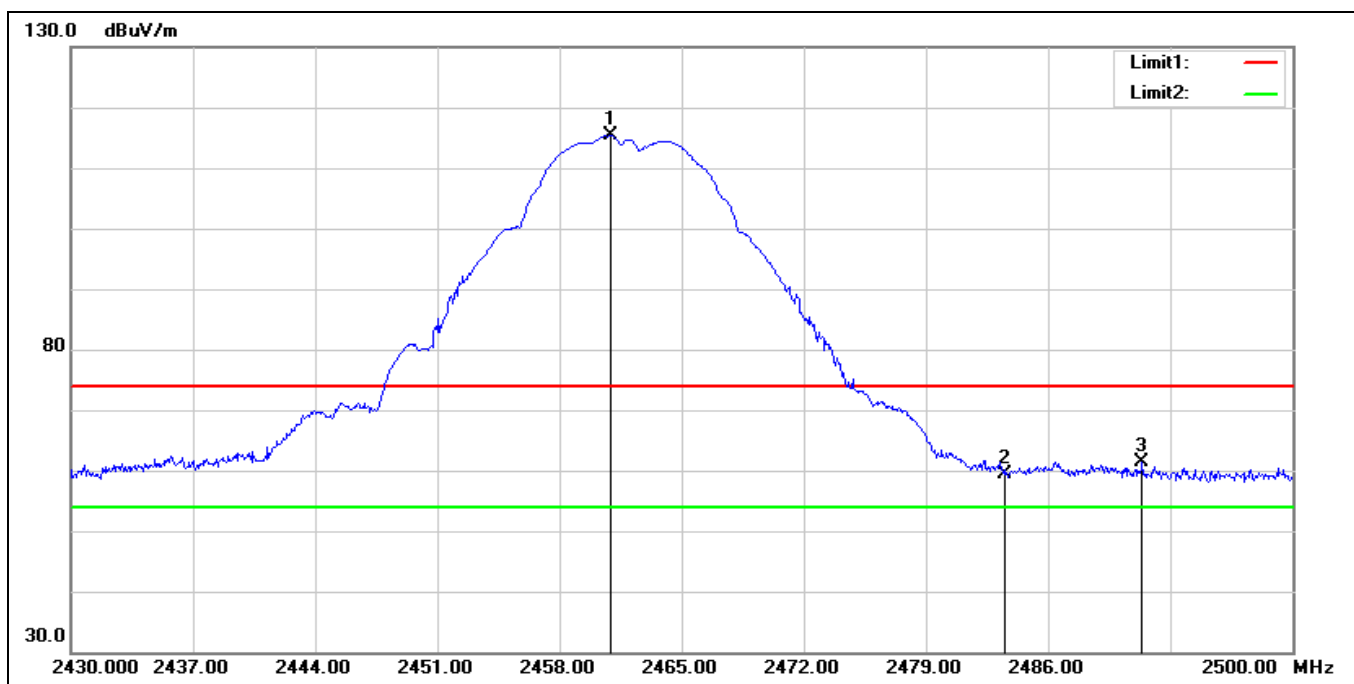


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2460.940	121.34	-6.03	115.31	74.00	41.31	peak
2	2483.500	65.58	-6.13	59.45	74.00	-14.55	peak
3	2491.390	67.57	-6.17	61.40	74.00	-12.60	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2462 MHz		
Remark:			

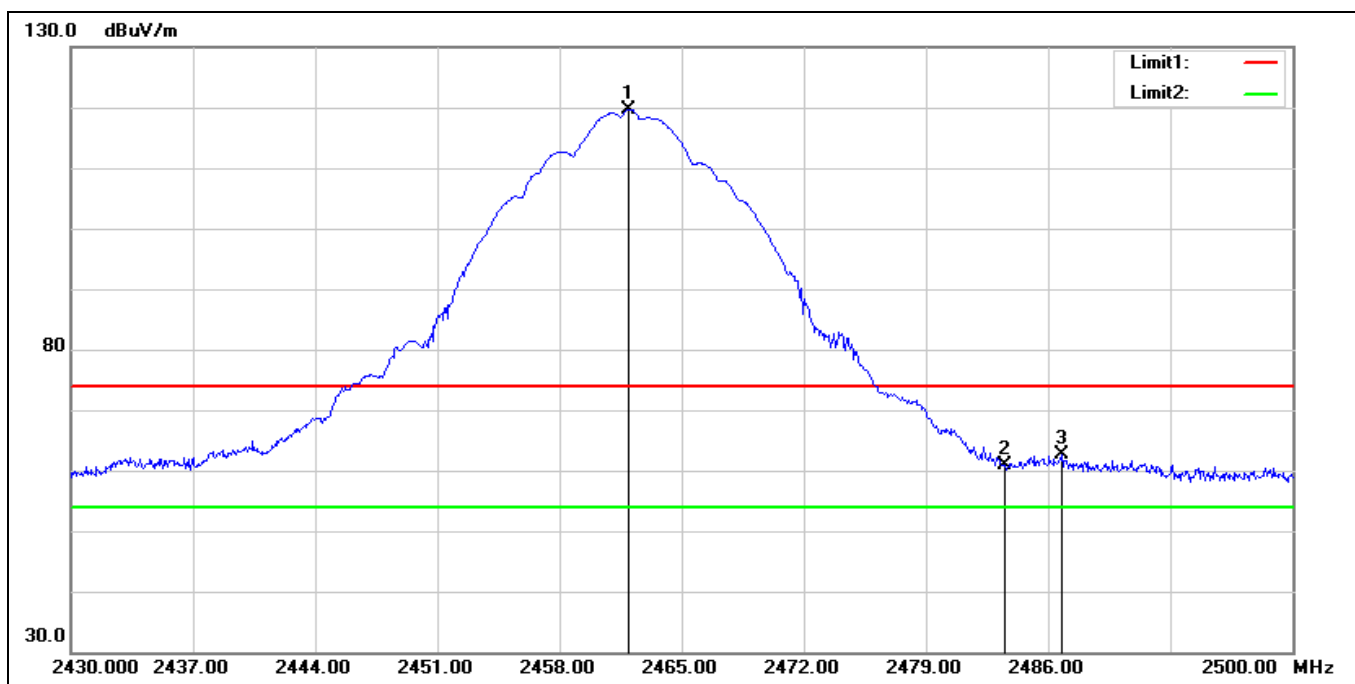


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2461.990	125.77	-6.03	119.74	74.00	45.74	peak
2	2483.500	67.06	-6.13	60.93	74.00	-13.07	peak
3	2486.770	68.69	-6.14	62.55	74.00	-11.45	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2412 MHz		
Remark:			

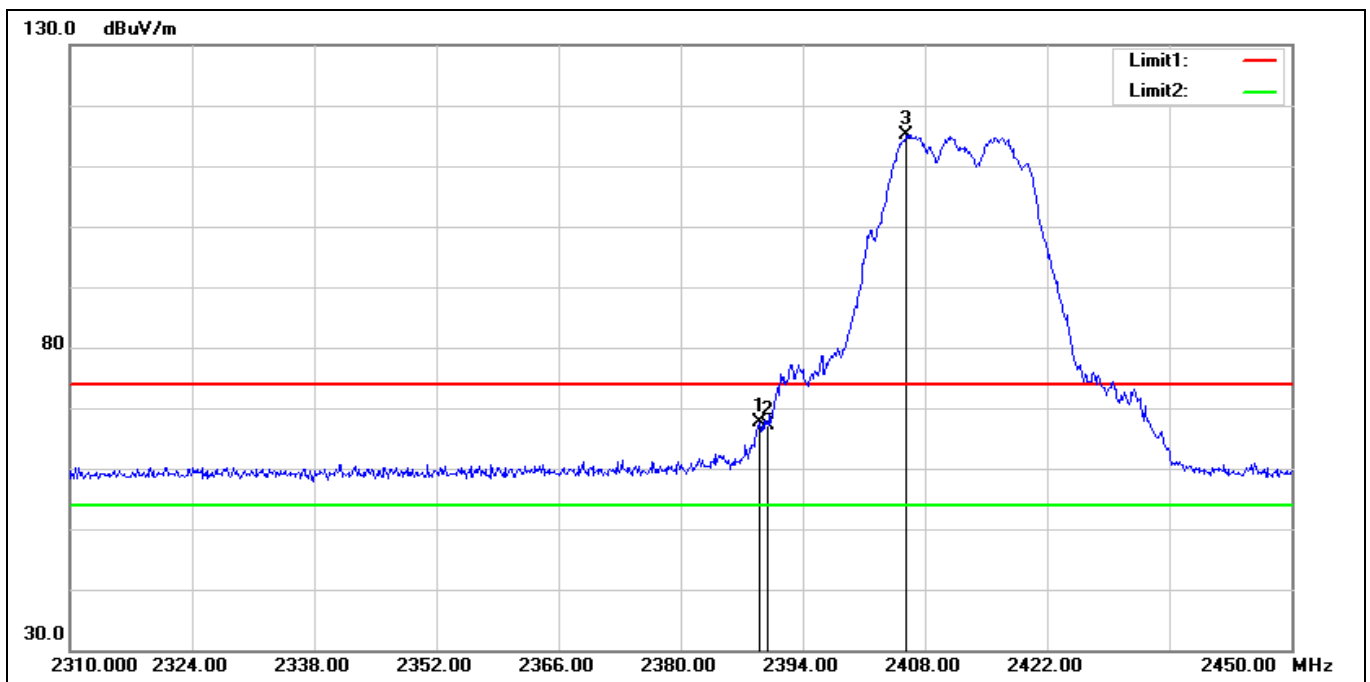


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	73.64	-6.08	67.56	74.00	-6.44	peak
2	2390.000	73.13	-6.09	67.04	74.00	-6.96	peak
3*	2405.900	121.24	-6.12	115.12	74.00	41.12	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2412 MHz		
Remark:			

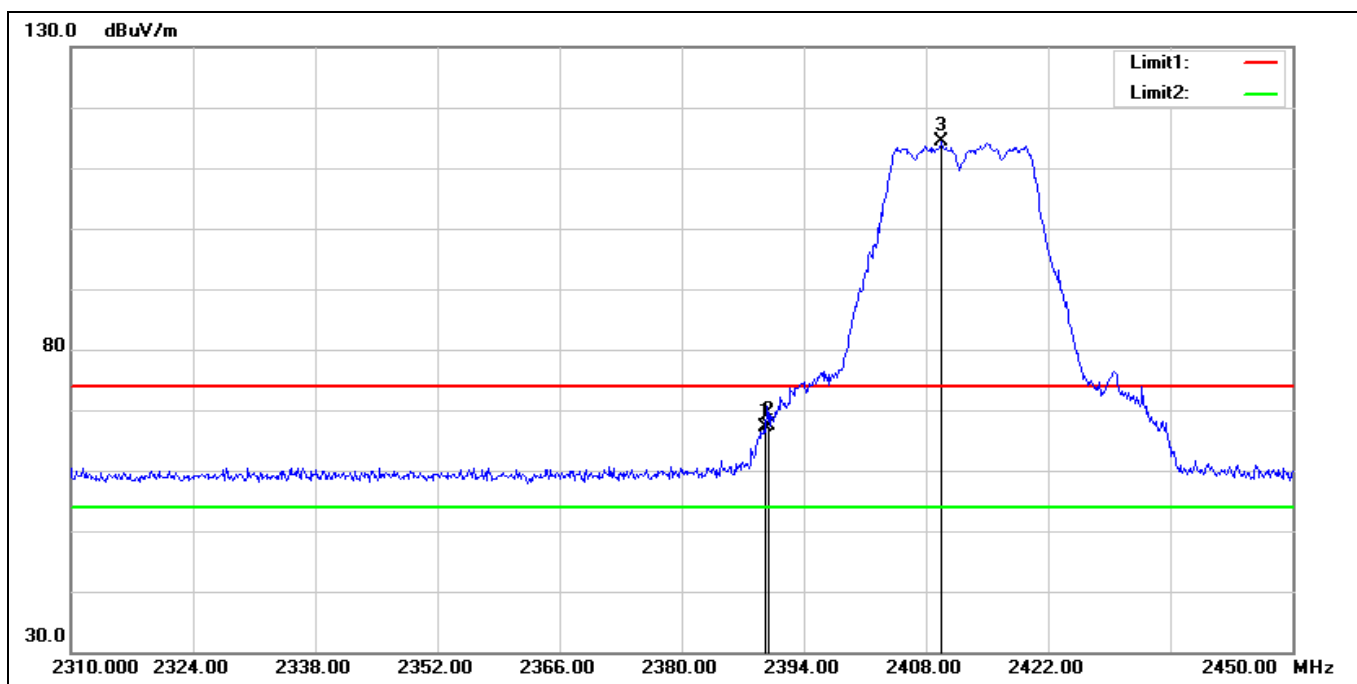


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	73.10	-6.09	67.01	74.00	-6.99	peak
2	2390.000	73.54	-6.09	67.45	74.00	-6.55	peak
3*	2409.820	120.48	-6.10	114.38	74.00	40.38	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2437 MHz		
Remark:			

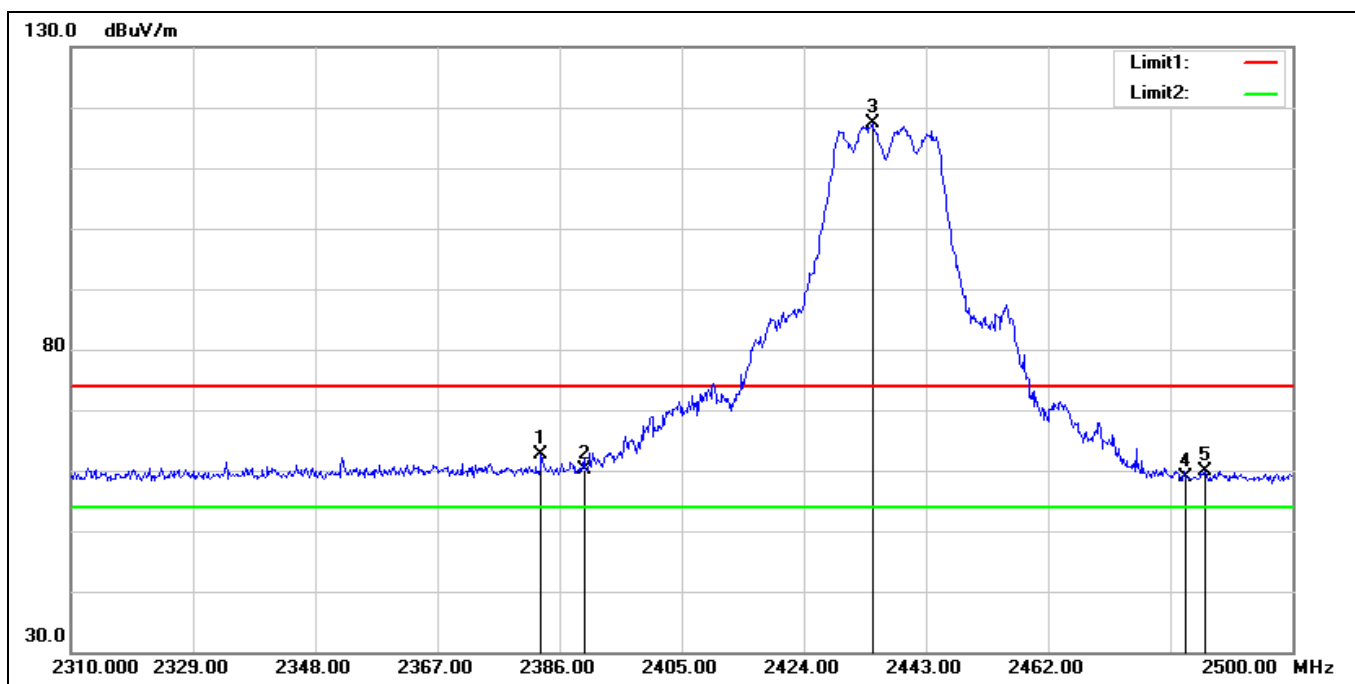


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.150	68.72	-6.06	62.66	74.00	-11.34	peak
2	2390.000	66.31	-6.09	60.22	74.00	-13.78	peak
3*	2434.640	123.35	-6.03	117.32	74.00	43.32	peak
4	2483.500	64.89	-6.13	58.76	74.00	-15.24	peak
5	2486.320	65.98	-6.14	59.84	74.00	-14.16	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2437 MHz		
Remark:			

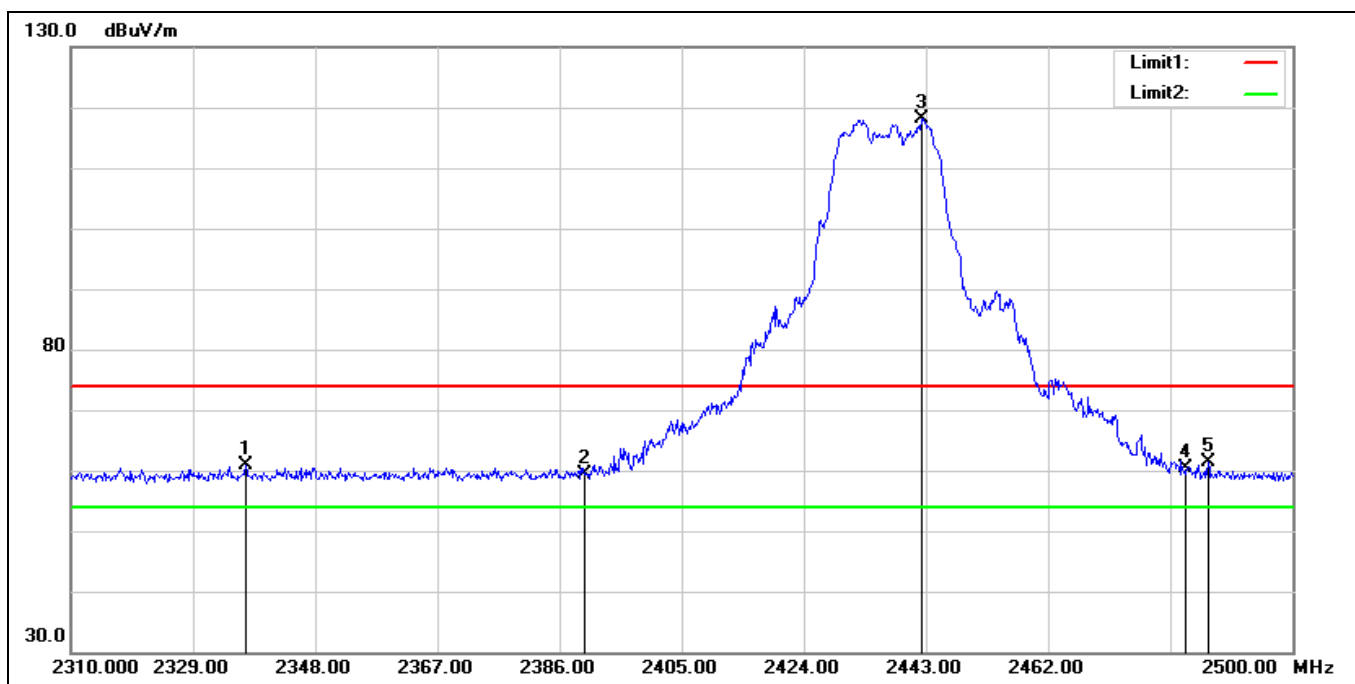


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2337.170	66.69	-5.92	60.77	74.00	-13.23	peak
2	2390.000	65.55	-6.09	59.46	74.00	-14.54	peak
3*	2442.430	124.13	-6.00	118.13	74.00	44.13	peak
4	2483.500	66.47	-6.13	60.34	74.00	-13.66	peak
5	2486.890	67.40	-6.14	61.26	74.00	-12.74	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11g 2462 MHz		
Remark:			

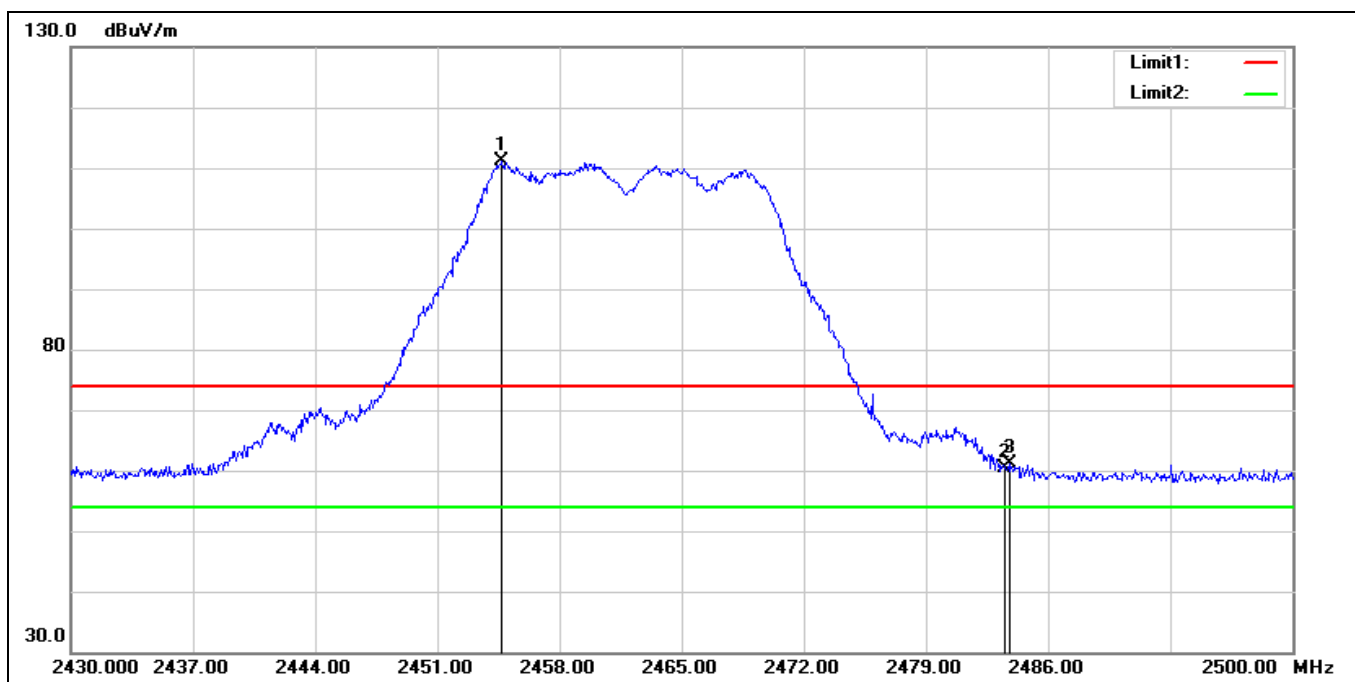


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.710	117.05	-6.00	111.05	74.00	37.05	peak
2	2483.500	66.42	-6.13	60.29	74.00	-13.71	peak
3	2483.760	67.34	-6.13	61.21	74.00	-12.79	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11g 2462 MHz		
Remark:			

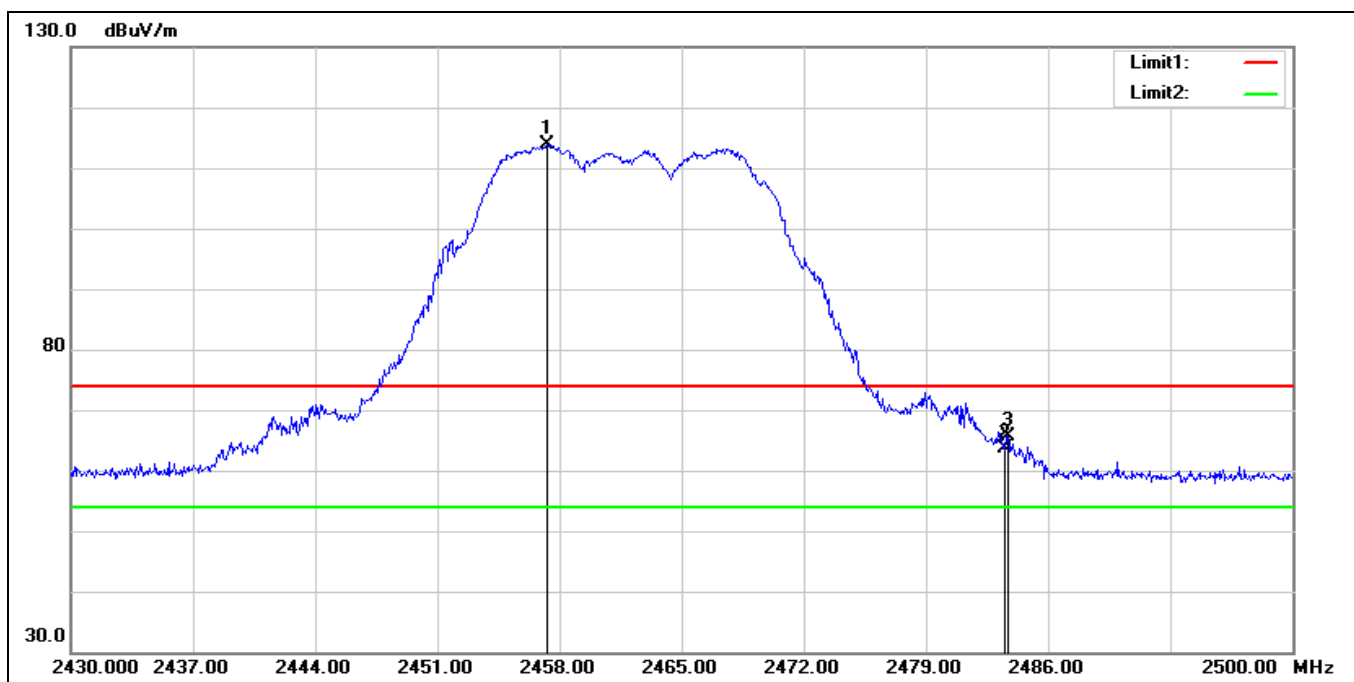


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2457.300	119.92	-6.00	113.92	74.00	39.92	peak
2	2483.500	69.81	-6.13	63.68	74.00	-10.32	peak
3	2483.690	71.88	-6.13	65.75	74.00	-8.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

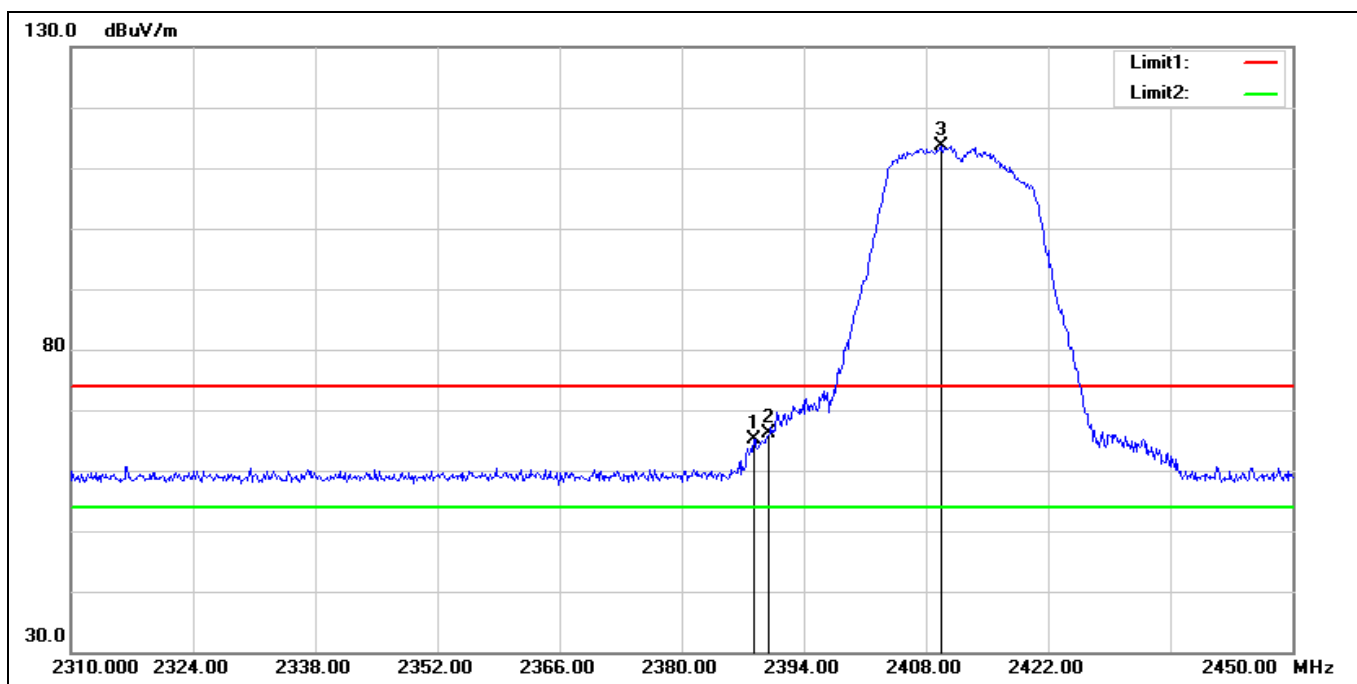


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.260	71.26	-6.08	65.18	74.00	-8.82	peak
2	2390.000	72.24	-6.09	66.15	74.00	-7.85	peak
3*	2409.680	119.72	-6.10	113.62	74.00	39.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2412 MHz		
Remark:			

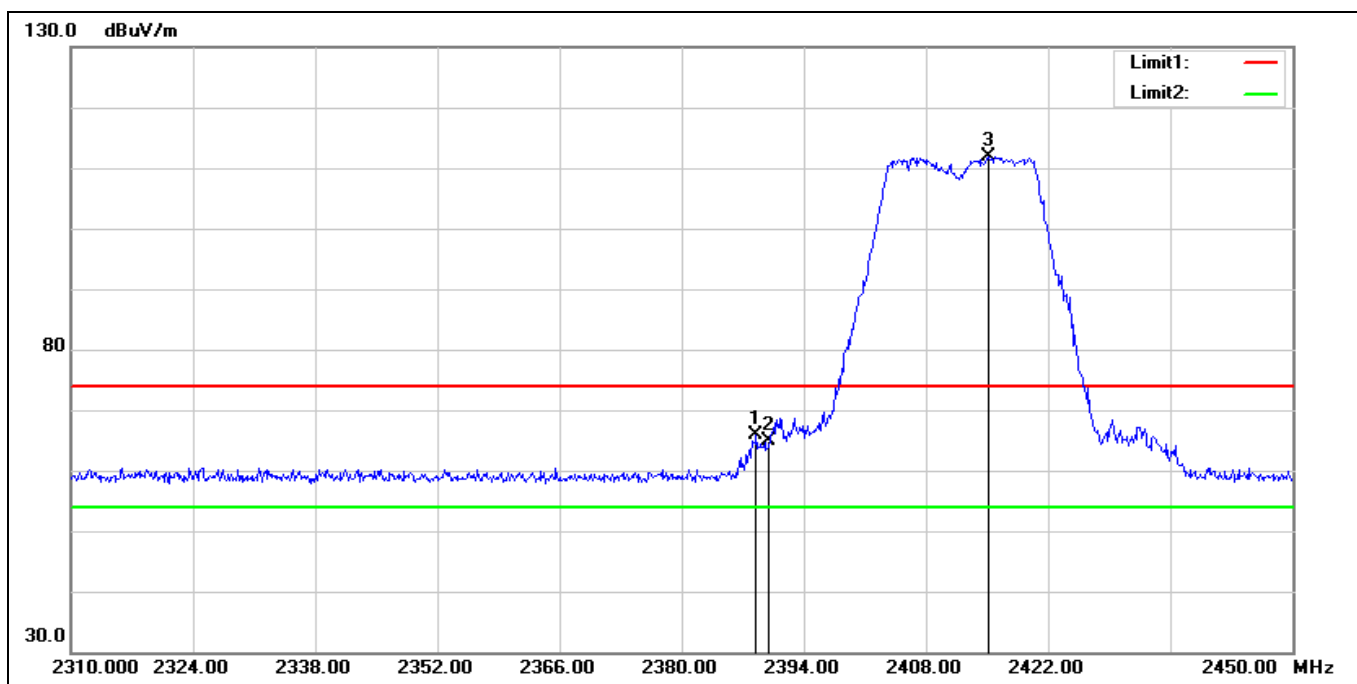


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	71.99	-6.08	65.91	74.00	-8.09	peak
2	2390.000	71.09	-6.09	65.00	74.00	-9.00	peak
3*	2415.140	117.91	-6.09	111.82	74.00	37.82	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2417 MHz		
Remark:			

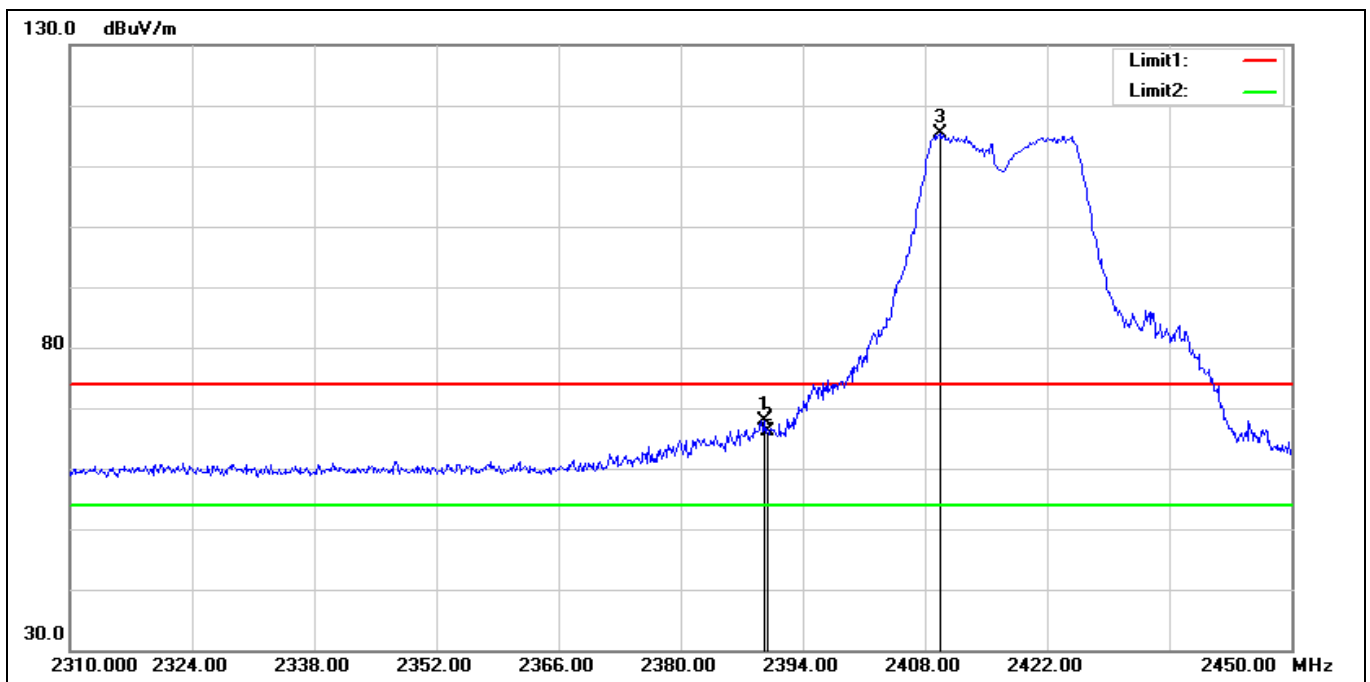


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	74.03	-6.09	67.94	74.00	-6.06	peak
2	2390.000	72.29	-6.09	66.20	74.00	-7.80	peak
3*	2409.680	121.36	-6.10	115.26	74.00	41.26	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2417 MHz		
Remark:			

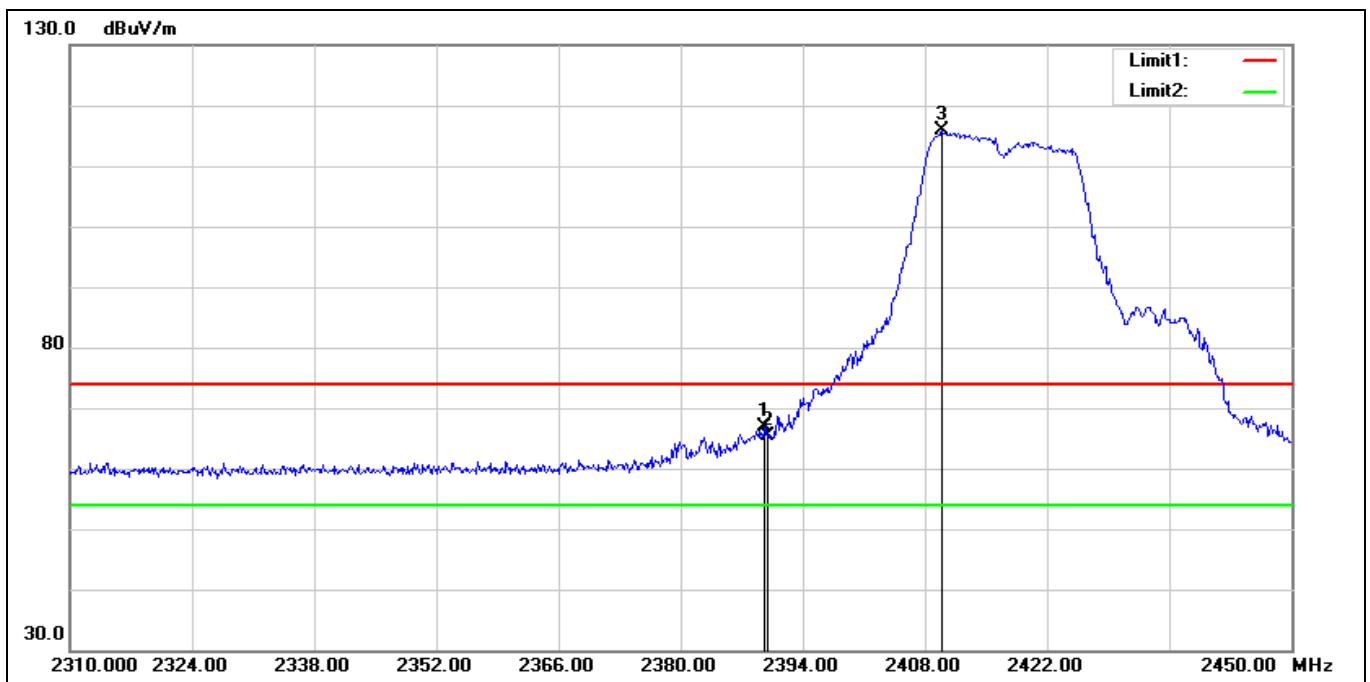


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.660	72.86	-6.09	66.77	74.00	-7.23	peak
2	2390.000	71.56	-6.09	65.47	74.00	-8.53	peak
3*	2409.960	121.93	-6.10	115.83	74.00	41.83	peak

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11n HT20 2437 MHz
Remark:

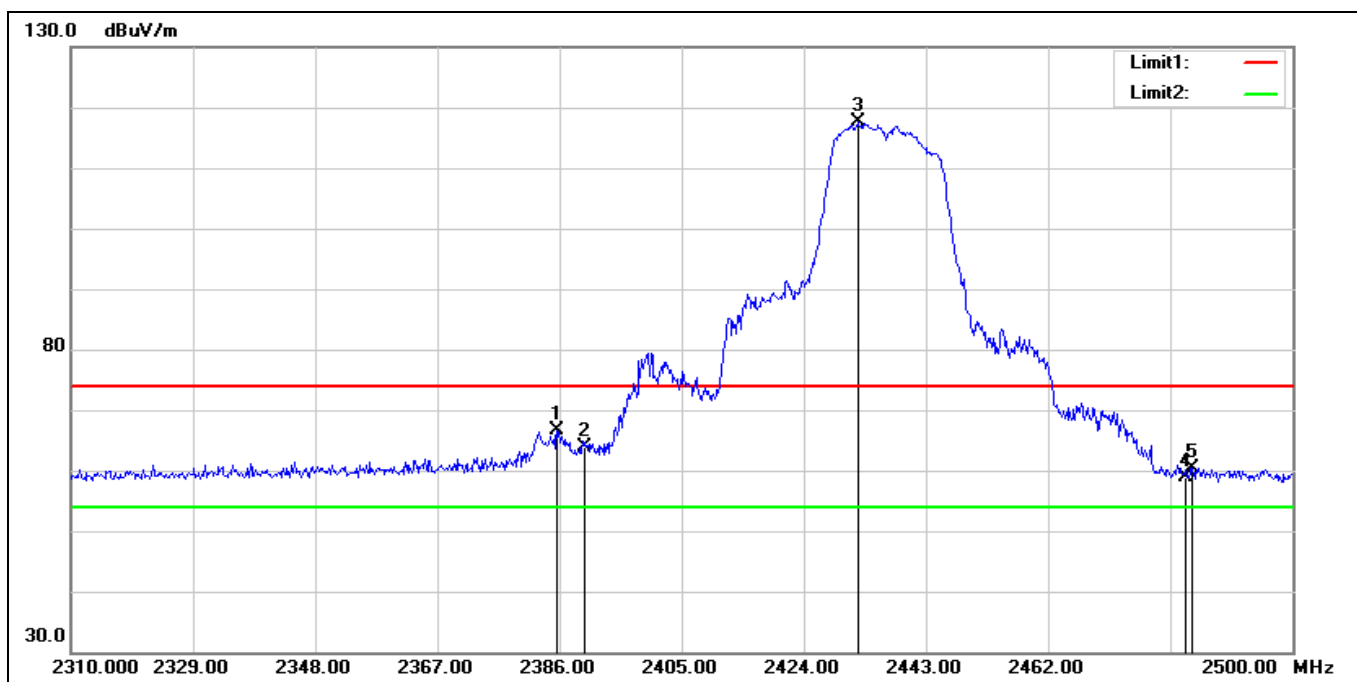


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.620	72.82	-6.07	66.75	74.00	-7.25	peak
2	2390.000	70.01	-6.09	63.92	74.00	-10.08	peak
3*	2432.360	123.58	-6.04	117.54	74.00	43.54	peak
4	2483.500	64.98	-6.13	58.85	74.00	-15.15	peak
5	2484.420	66.54	-6.14	60.40	74.00	-13.60	peak

Standard: Part 15C Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11n HT20 2437 MHz
Remark:

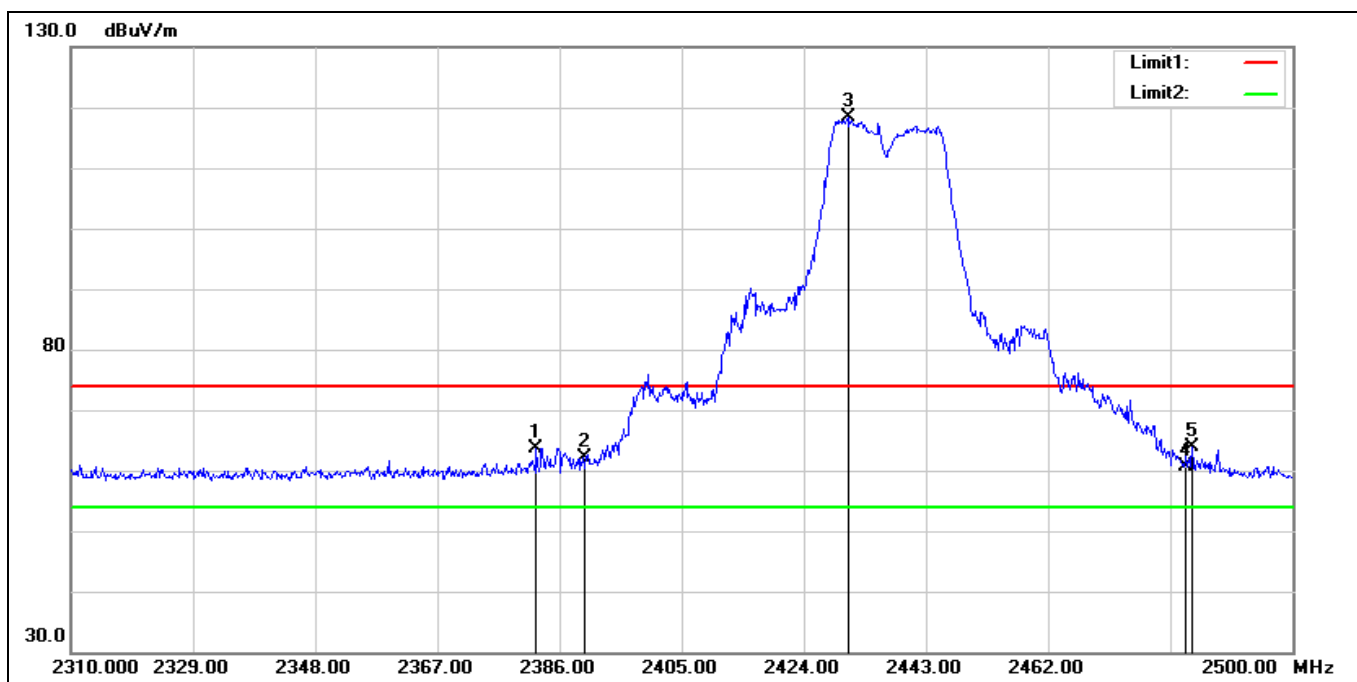


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.390	69.67	-6.05	63.62	74.00	-10.38	peak
2	2390.000	68.33	-6.09	62.24	74.00	-11.76	peak
3*	2430.840	124.37	-6.04	118.33	74.00	44.33	peak
4	2483.500	66.82	-6.13	60.69	74.00	-13.31	peak
5	2484.420	69.95	-6.14	63.81	74.00	-10.19	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

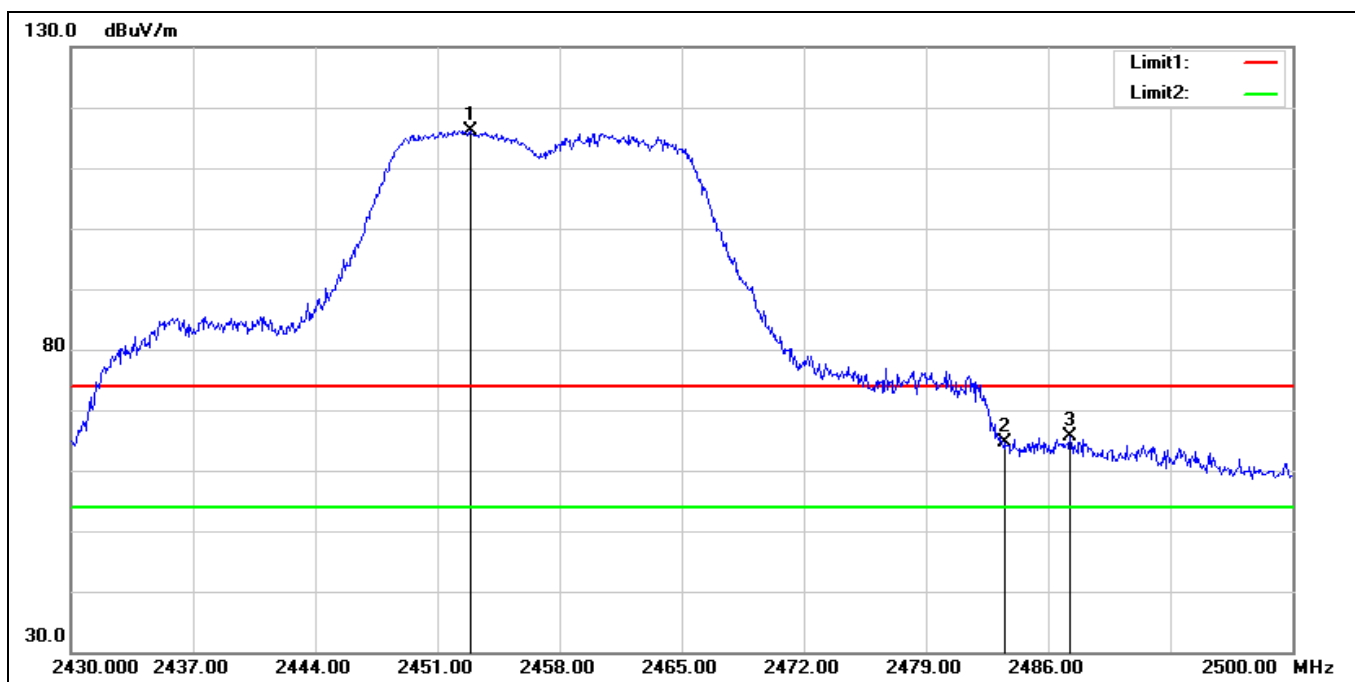


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2452.890	122.10	-5.99	116.11	74.00	42.11	peak
2	2483.500	70.76	-6.13	64.63	74.00	-9.37	peak
3	2487.260	71.80	-6.14	65.66	74.00	-8.34	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2457 MHz		
Remark:			

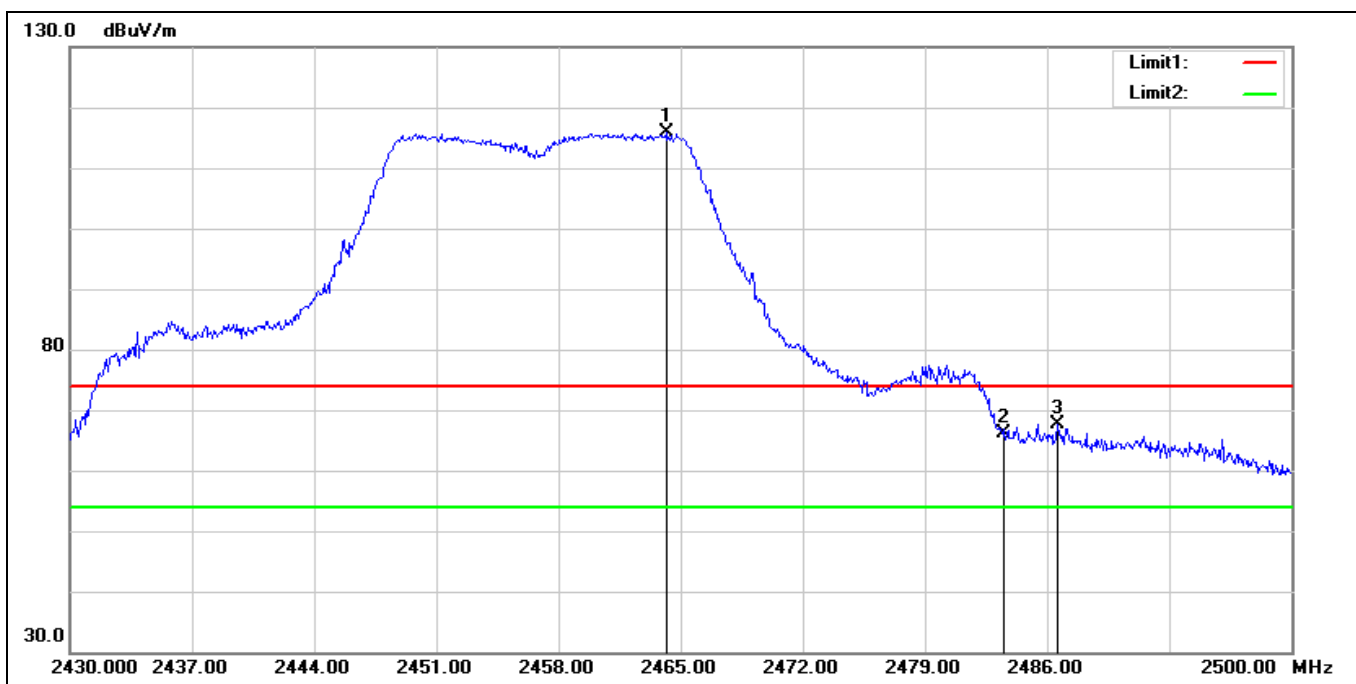


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2464.160	121.83	-6.04	115.79	74.00	41.79	peak
2	2483.500	72.22	-6.13	66.09	74.00	-7.91	peak
3	2486.560	73.89	-6.14	67.75	74.00	-6.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

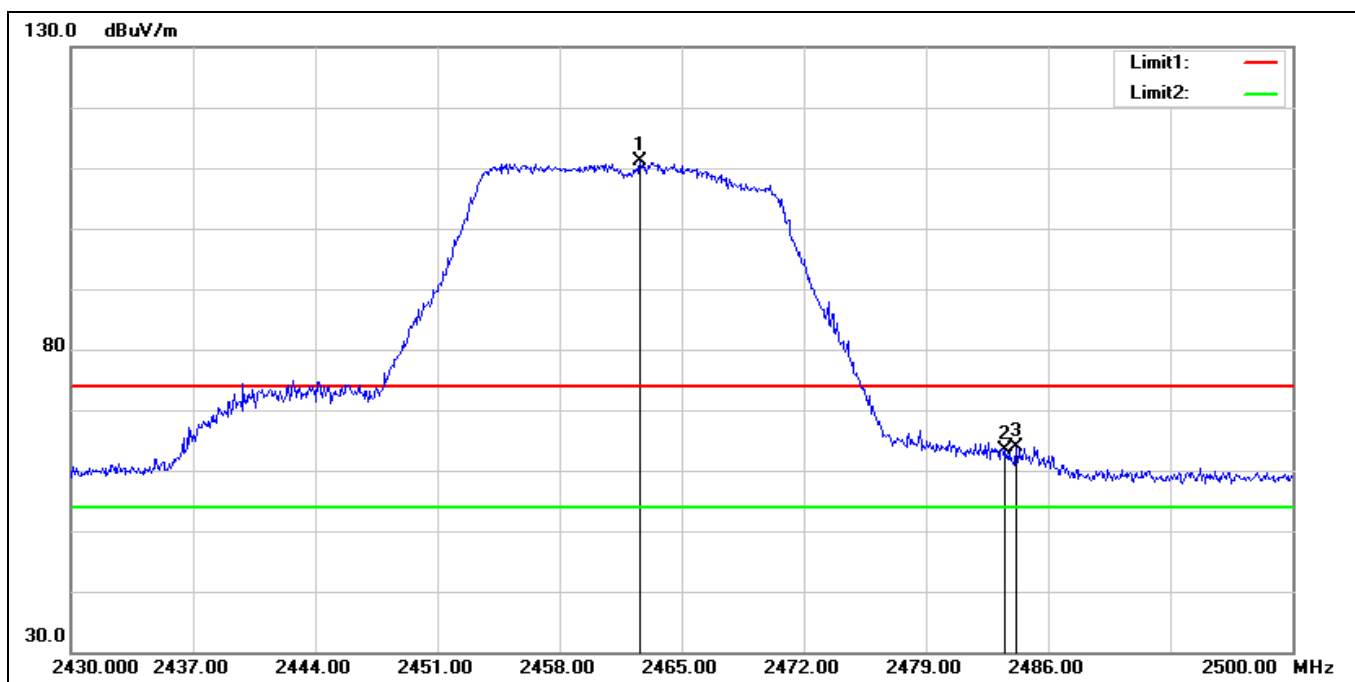


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2462.620	117.16	-6.04	111.12	74.00	37.12	peak
2	2483.500	69.40	-6.13	63.27	74.00	-10.73	peak
3	2484.180	69.96	-6.14	63.82	74.00	-10.18	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT20 2462 MHz		
Remark:			

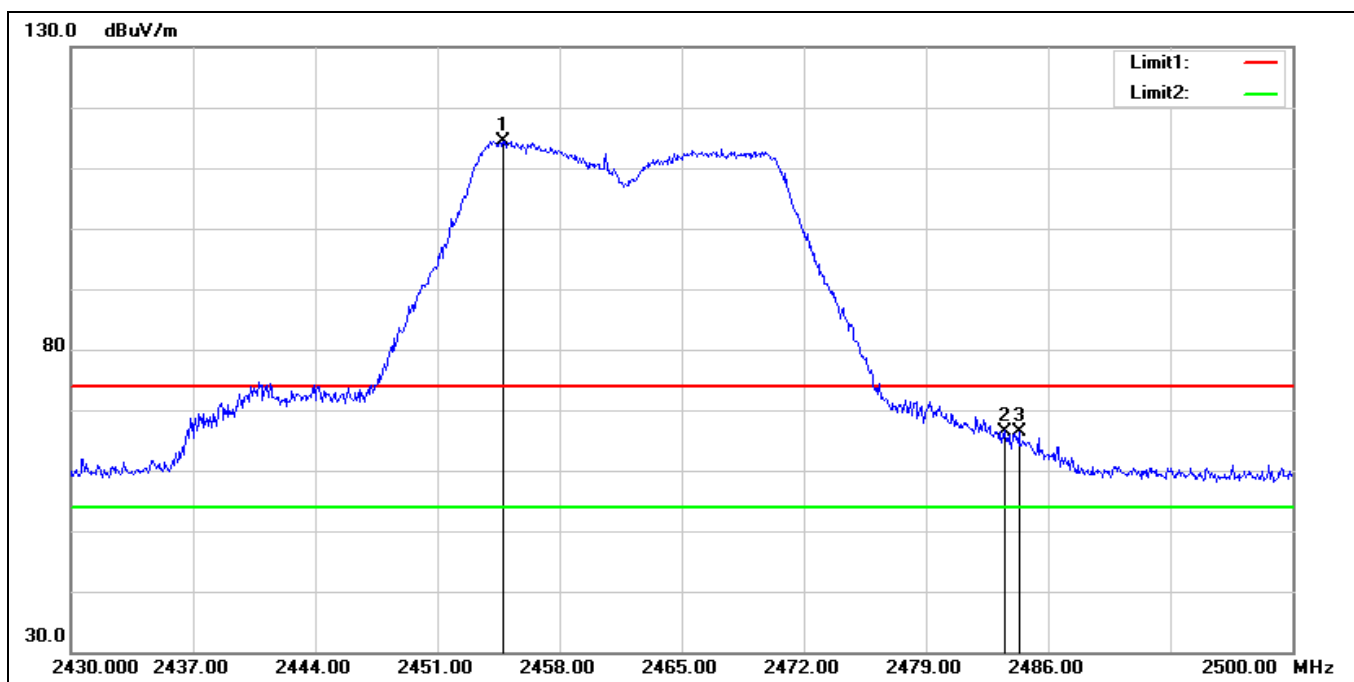


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2454.780	120.46	-6.00	114.46	74.00	40.46	peak
2	2483.500	72.50	-6.13	66.37	74.00	-7.63	peak
3	2484.320	72.47	-6.14	66.33	74.00	-7.67	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

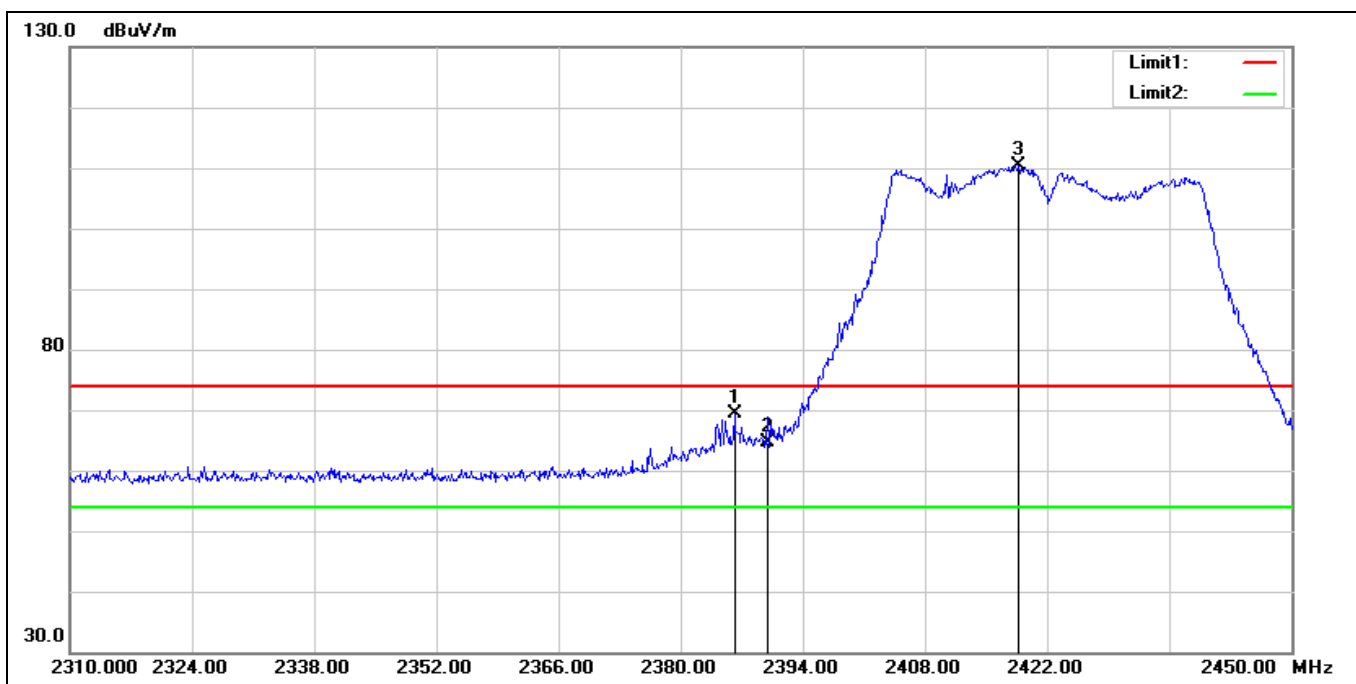


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.160	75.53	-6.08	69.45	74.00	-4.55	peak
2	2390.000	70.78	-6.09	64.69	74.00	-9.31	peak
3*	2418.780	116.48	-6.07	110.41	74.00	36.41	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2422 MHz		
Remark:			

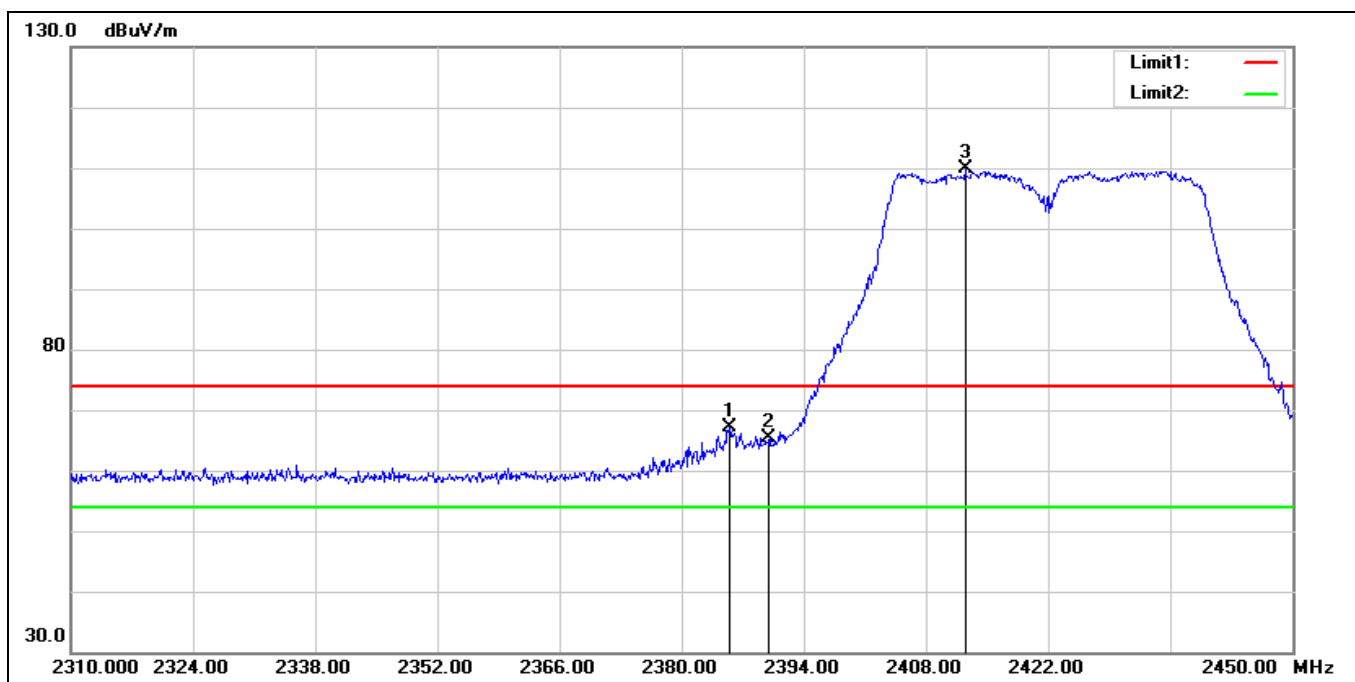


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.460	73.29	-6.07	67.22	74.00	-6.78	peak
2	2390.000	71.42	-6.09	65.33	74.00	-8.67	peak
3*	2412.480	115.90	-6.10	109.80	74.00	35.80	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2427 MHz		
Remark:			

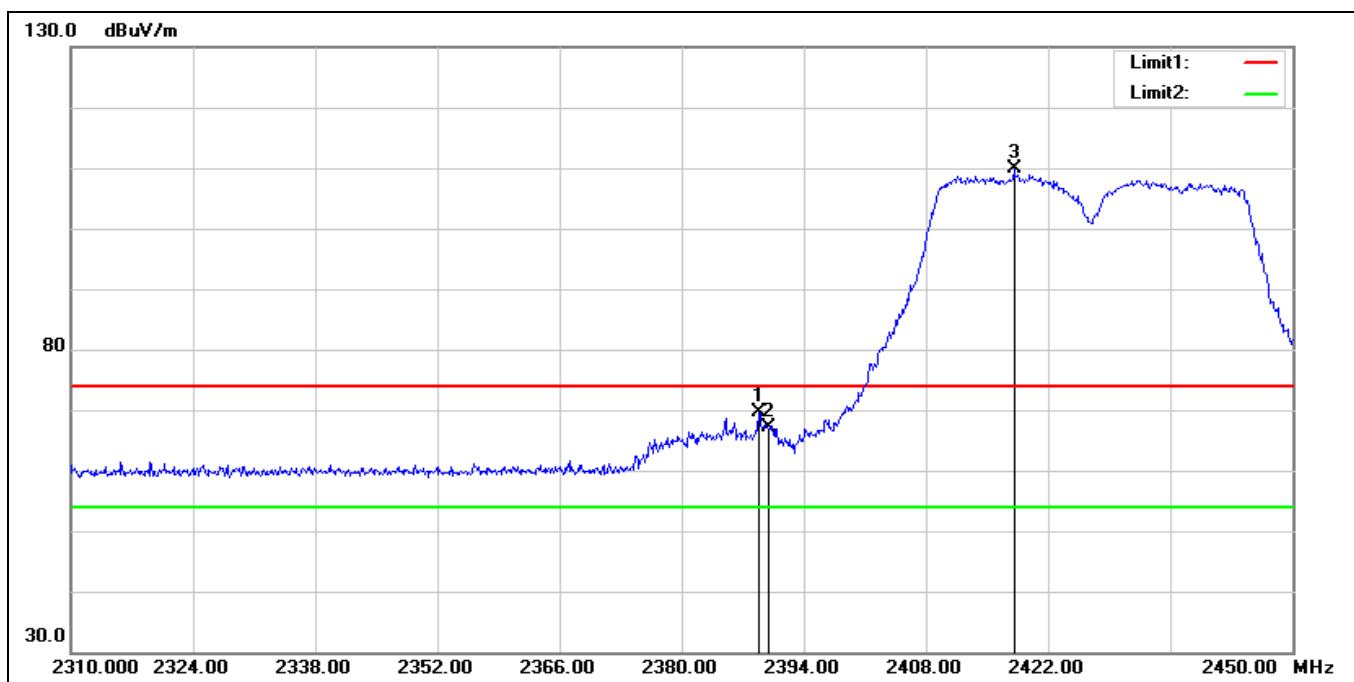


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.820	75.62	-6.08	69.54	74.00	-4.46	peak
2	2390.000	73.22	-6.09	67.13	74.00	-6.87	peak
3*	2418.080	116.00	-6.07	109.93	74.00	35.93	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2427 MHz		
Remark:			

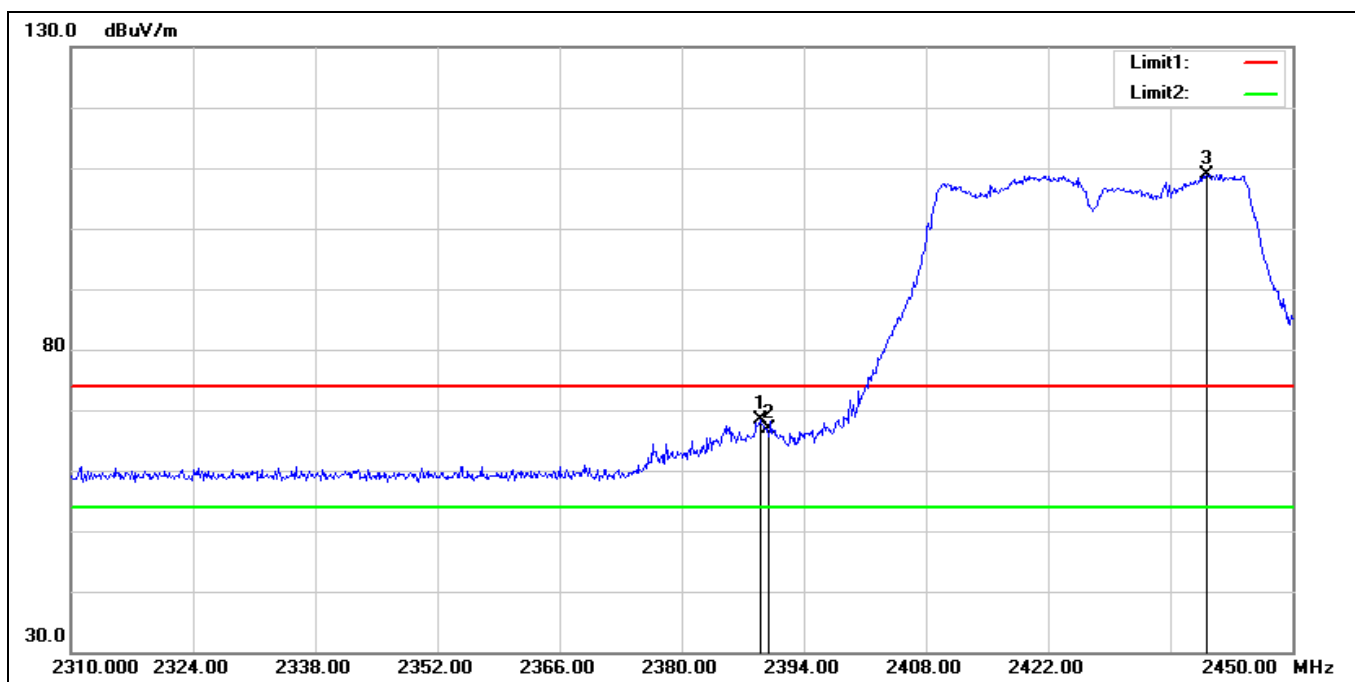


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	74.58	-6.08	68.50	74.00	-5.50	peak
2	2390.000	73.06	-6.09	66.97	74.00	-7.03	peak
3*	2440.200	114.99	-6.01	108.98	74.00	34.98	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

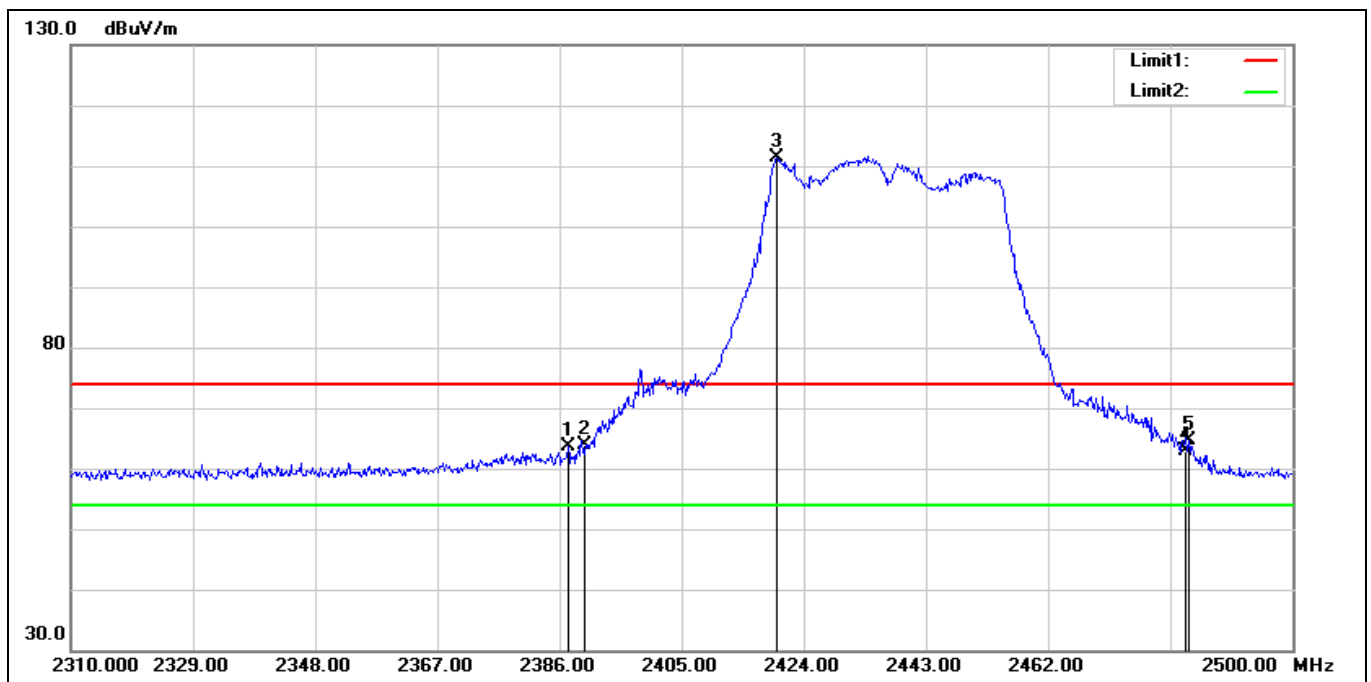


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.330	69.63	-6.07	63.56	74.00	-10.44	peak
2	2390.000	70.02	-6.09	63.93	74.00	-10.07	peak
3*	2419.820	117.47	-6.07	111.40	74.00	37.40	peak
4	2483.500	69.03	-6.13	62.90	74.00	-11.10	peak
5	2483.850	70.75	-6.13	64.62	74.00	-9.38	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2437 MHz		
Remark:			

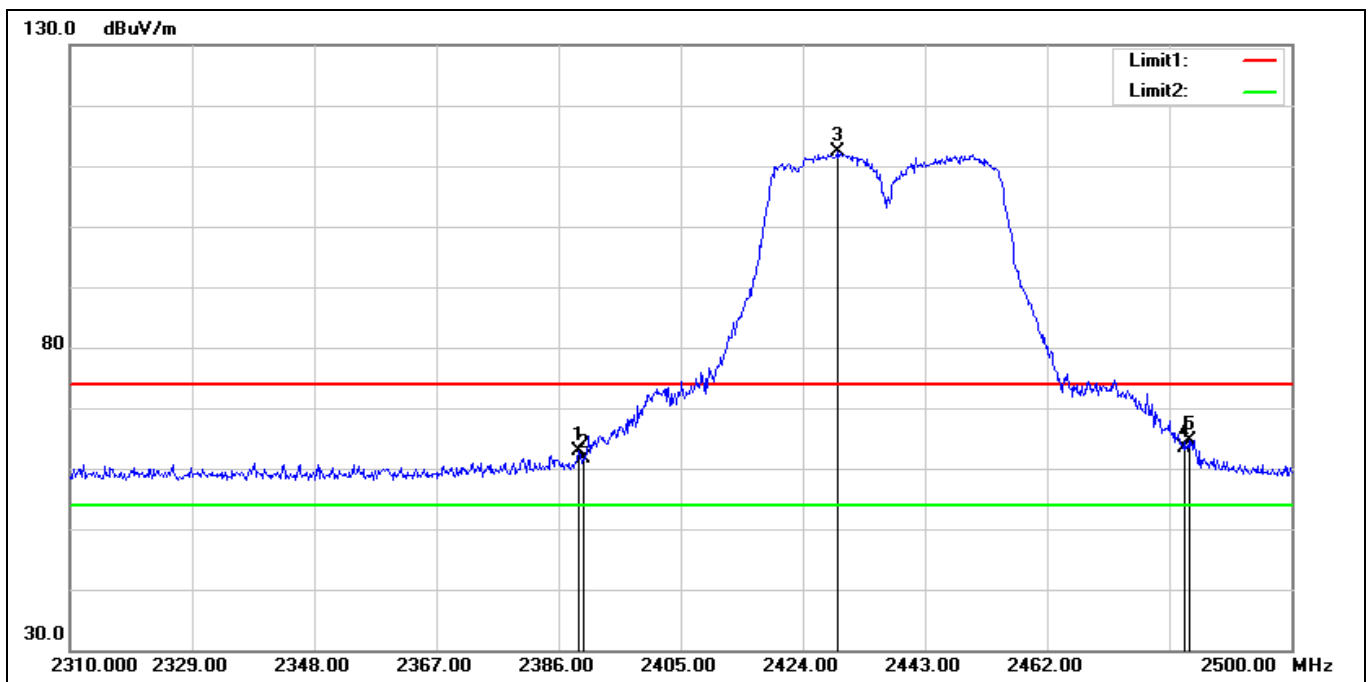


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.040	69.02	-6.08	62.94	74.00	-11.06	peak
2	2390.000	67.67	-6.09	61.58	74.00	-12.42	peak
3*	2429.320	118.30	-6.04	112.26	74.00	38.26	peak
4	2483.500	69.40	-6.13	63.27	74.00	-10.73	peak
5	2484.230	70.82	-6.14	64.68	74.00	-9.32	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2447 MHz		
Remark:			

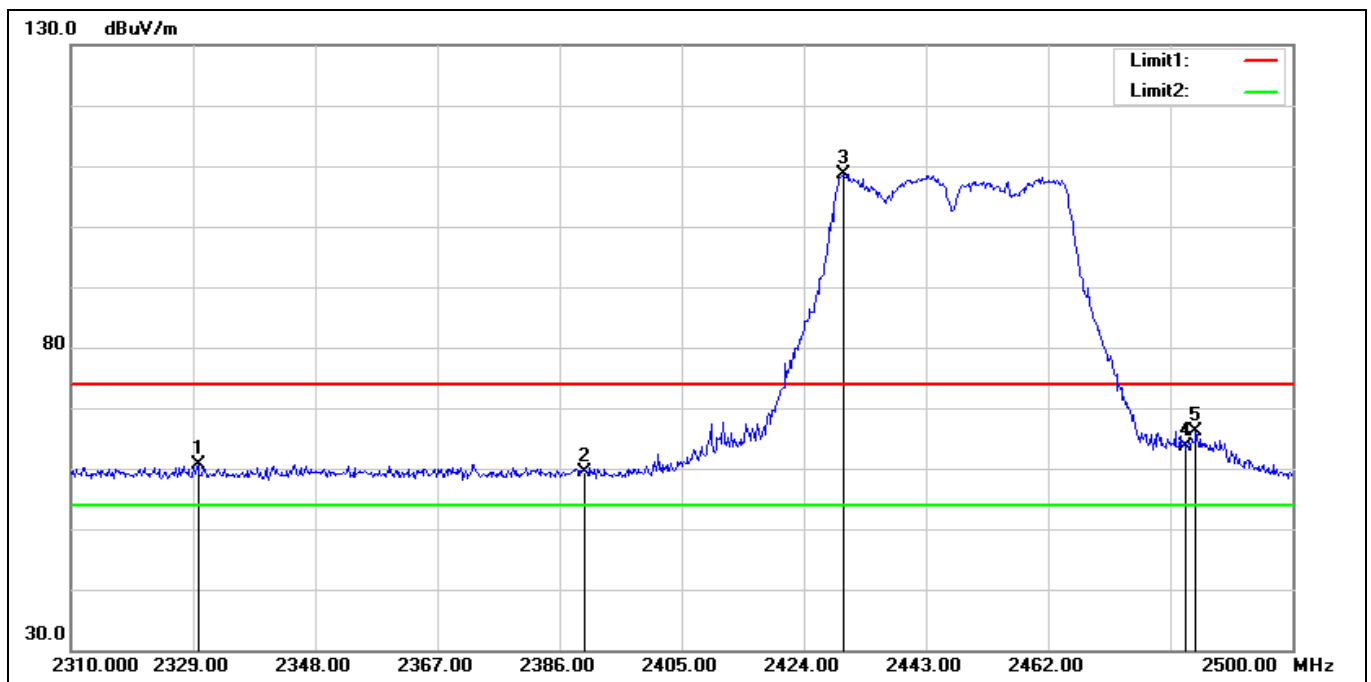


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2329.760	66.62	-5.92	60.70	74.00	-13.30	peak
2	2390.000	65.49	-6.09	59.40	74.00	-14.60	peak
3*	2430.080	114.65	-6.04	108.61	74.00	34.61	peak
4	2483.500	69.82	-6.13	63.69	74.00	-10.31	peak
5	2484.990	72.32	-6.14	66.18	74.00	-7.82	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2447 MHz		
Remark:			

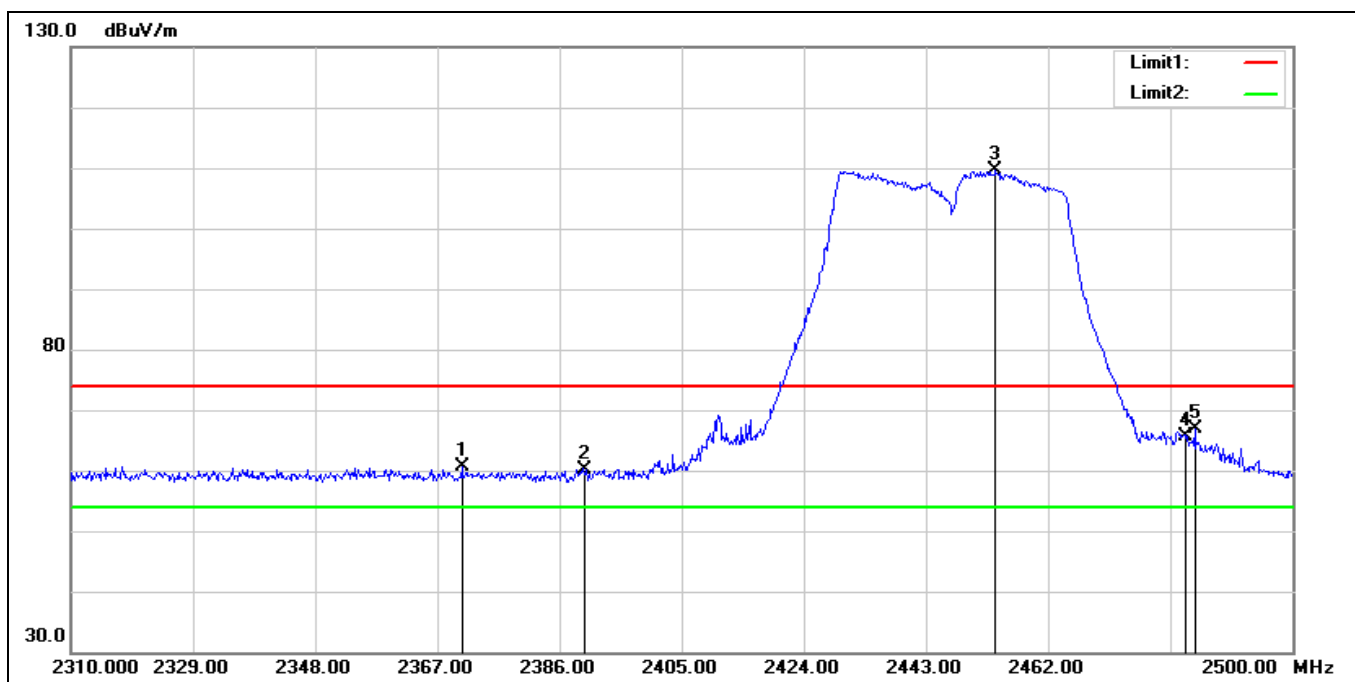


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.800	66.73	-5.99	60.74	74.00	-13.26	peak
2	2390.000	66.34	-6.09	60.25	74.00	-13.75	peak
3*	2453.830	115.66	-5.99	109.67	74.00	35.67	peak
4	2483.500	71.84	-6.13	65.71	74.00	-8.29	peak
5	2484.800	73.07	-6.14	66.93	74.00	-7.07	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

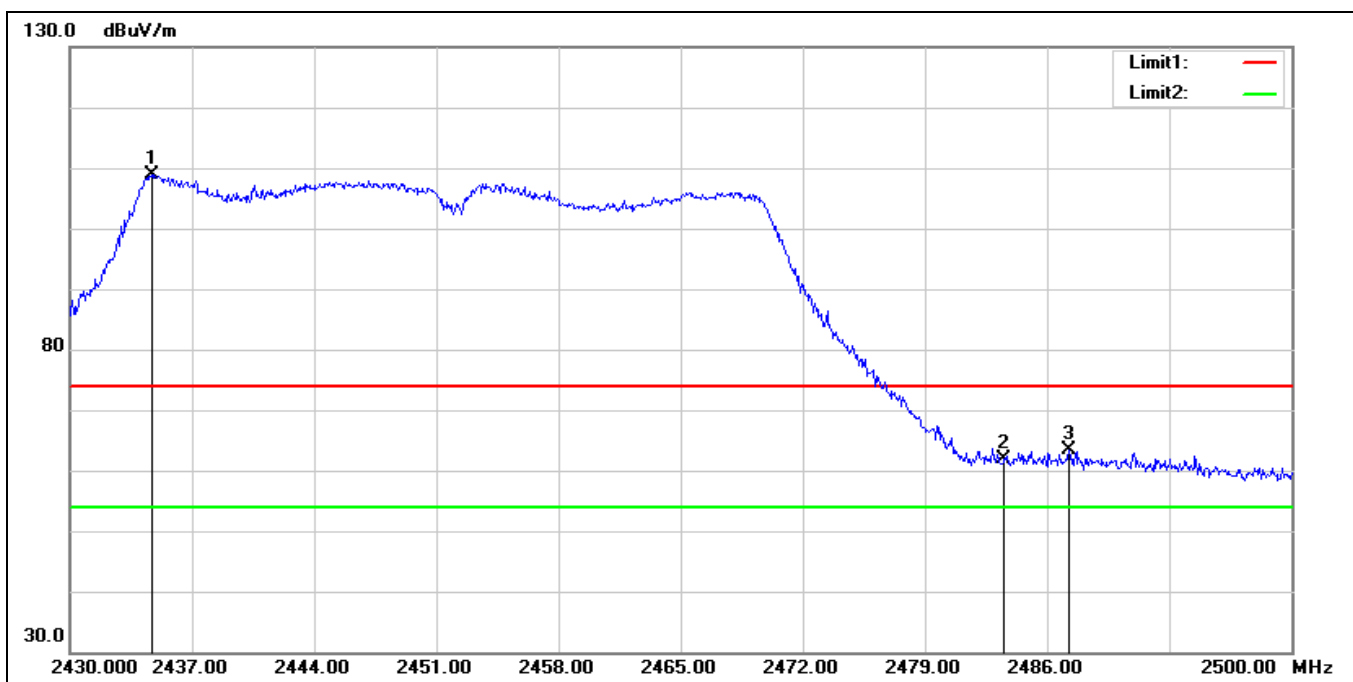


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2434.690	114.87	-6.03	108.84	74.00	34.84	peak
2	2483.500	67.93	-6.13	61.80	74.00	-12.20	peak
3	2487.260	69.60	-6.14	63.46	74.00	-10.54	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11n HT40 2452 MHz		
Remark:			

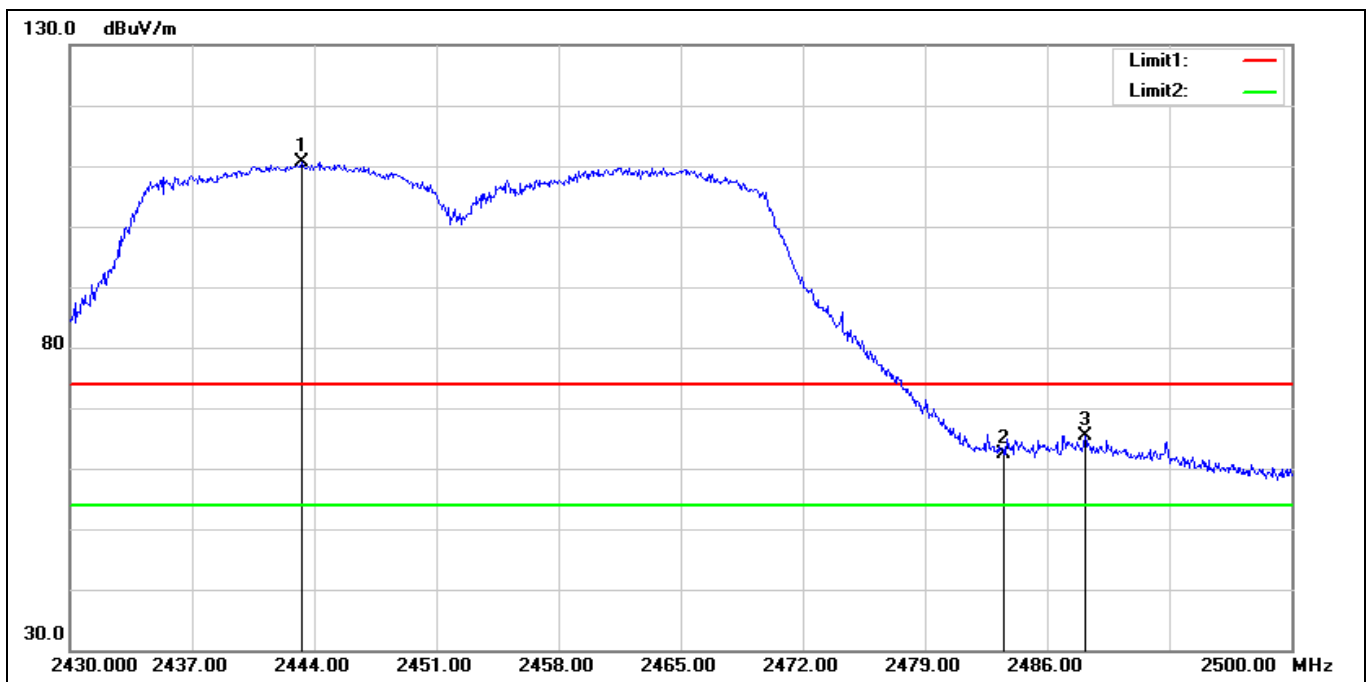


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2443.300	116.70	-5.99	110.71	74.00	36.71	peak
2	2483.500	68.59	-6.13	62.46	74.00	-11.54	peak
3	2488.170	71.53	-6.15	65.38	74.00	-8.62	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

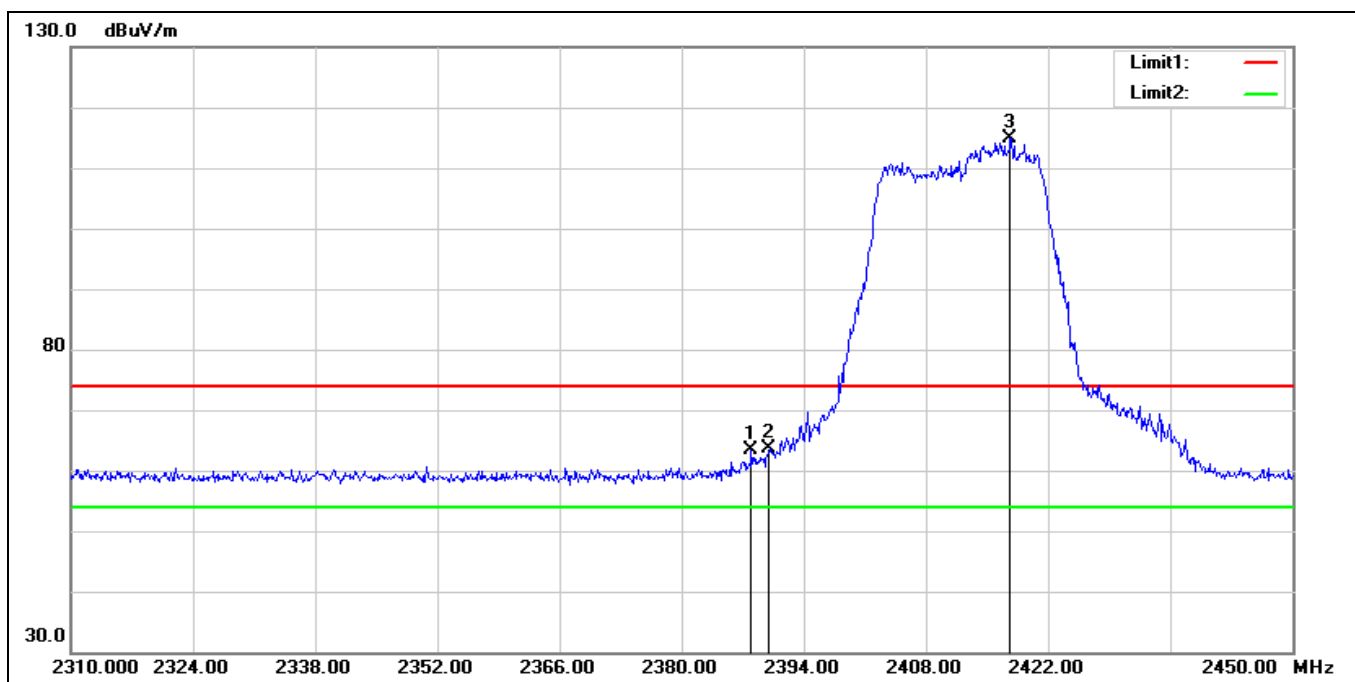


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.980	69.41	-6.08	63.33	74.00	-10.67	peak
2	2390.000	69.60	-6.09	63.51	74.00	-10.49	peak
3*	2417.660	121.02	-6.07	114.95	74.00	40.95	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2412 MHz		
Remark:			

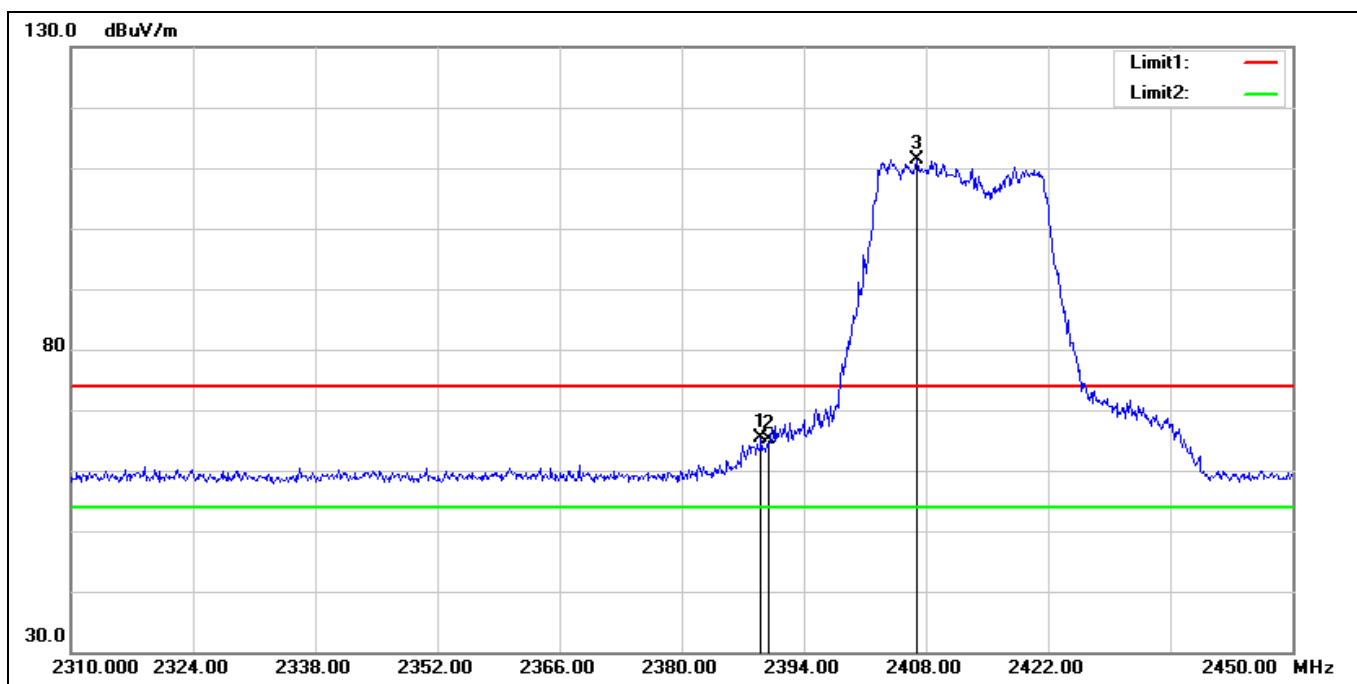


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.100	71.36	-6.08	65.28	74.00	-8.72	peak
2	2390.000	71.28	-6.09	65.19	74.00	-8.81	peak
3*	2407.020	117.52	-6.11	111.41	74.00	37.41	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2417 MHz		
Remark:			

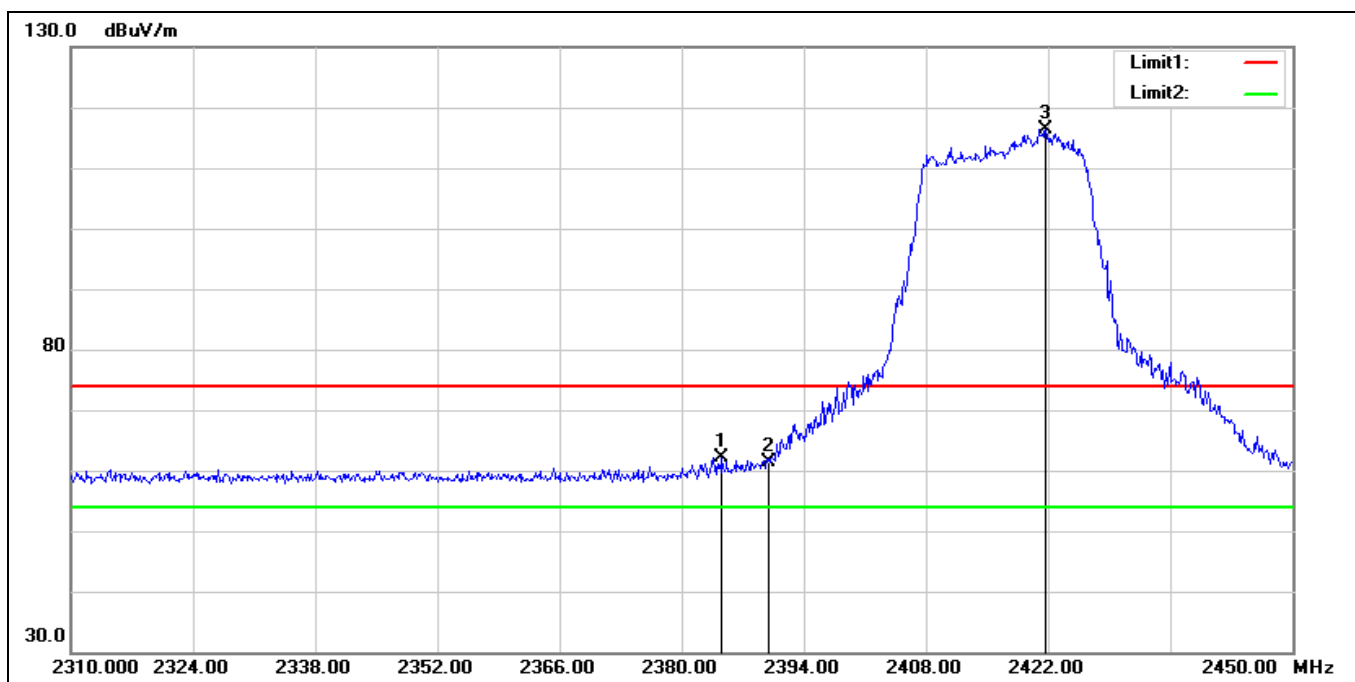


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.620	68.25	-6.07	62.18	74.00	-11.82	peak
2	2390.000	67.47	-6.09	61.38	74.00	-12.62	peak
3*	2421.720	122.52	-6.07	116.45	74.00	42.45	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2417 MHz		
Remark:			

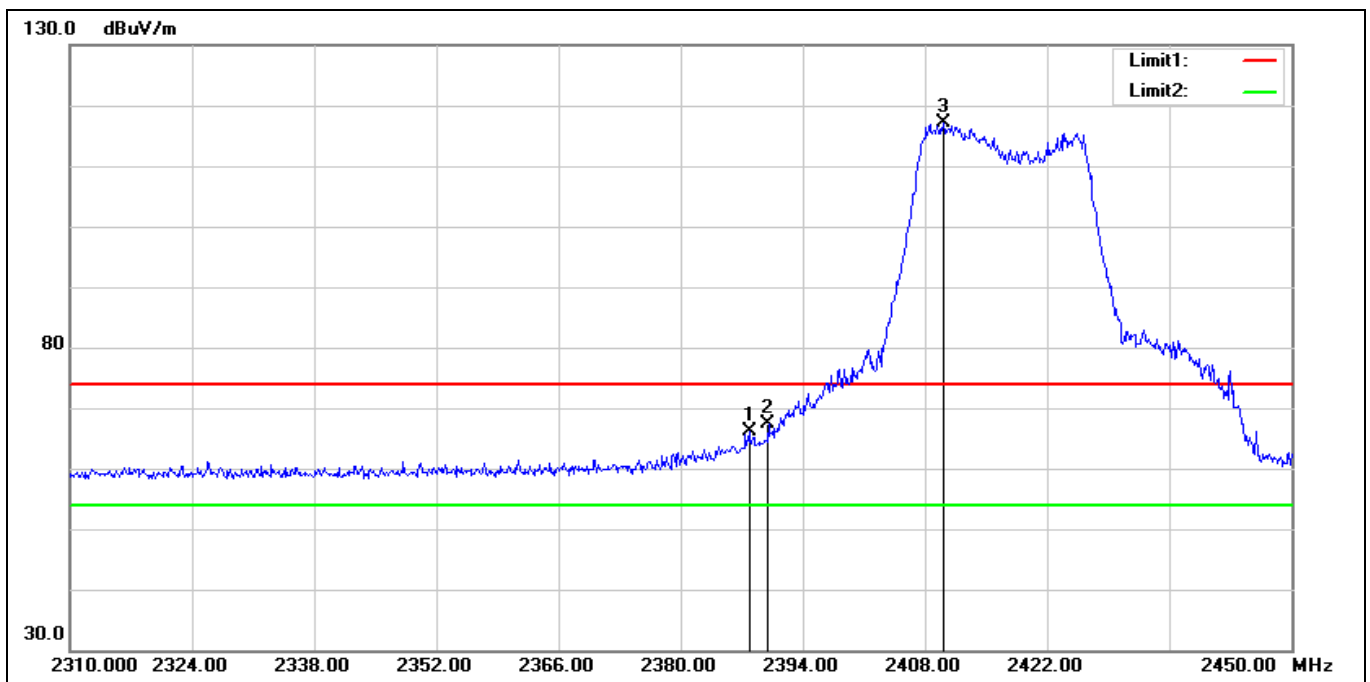


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.840	72.27	-6.08	66.19	74.00	-7.81	peak
2	2390.000	73.59	-6.09	67.50	74.00	-6.50	peak
3*	2410.100	123.17	-6.10	117.07	74.00	43.07	peak

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 2437 MHz
Remark:

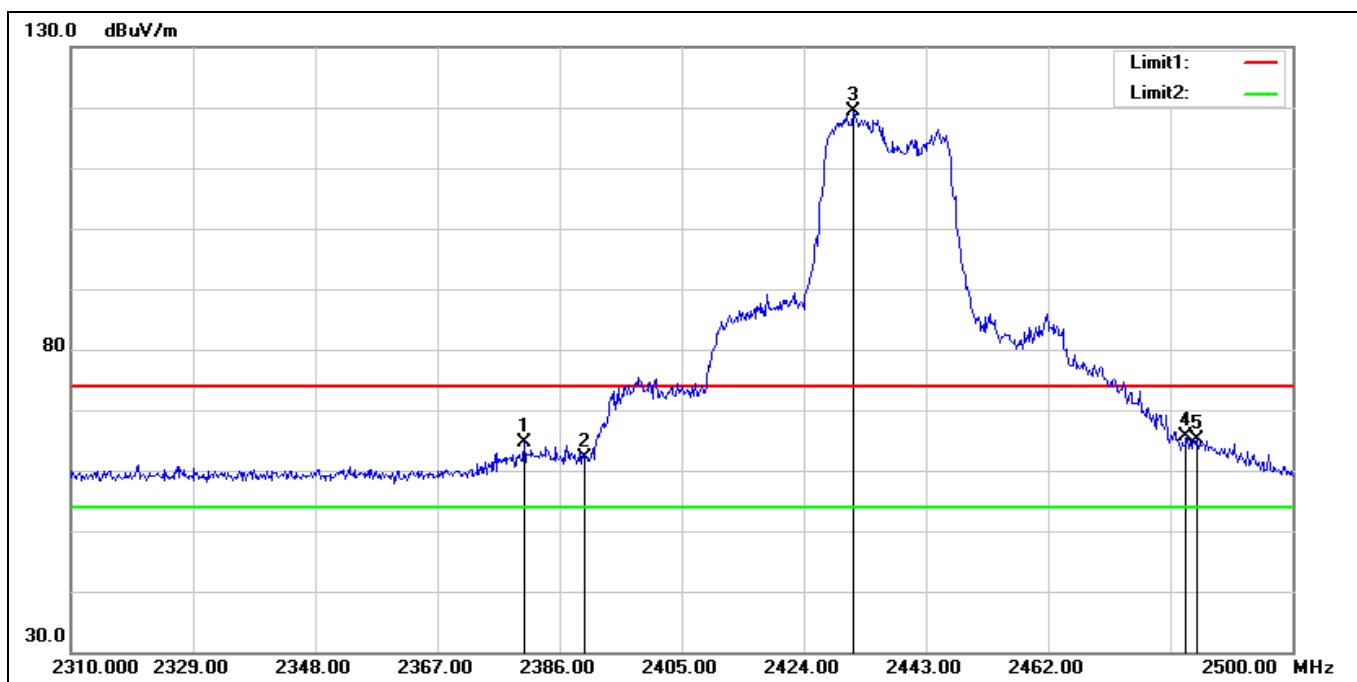


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.490	70.55	-6.04	64.51	74.00	-9.49	peak
2	2390.000	68.18	-6.09	62.09	74.00	-11.91	peak
3*	2431.600	125.54	-6.04	119.50	74.00	45.50	peak
4	2483.500	71.78	-6.13	65.65	74.00	-8.35	peak
5	2485.180	71.29	-6.14	65.15	74.00	-8.85	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2437 MHz		
Remark:			

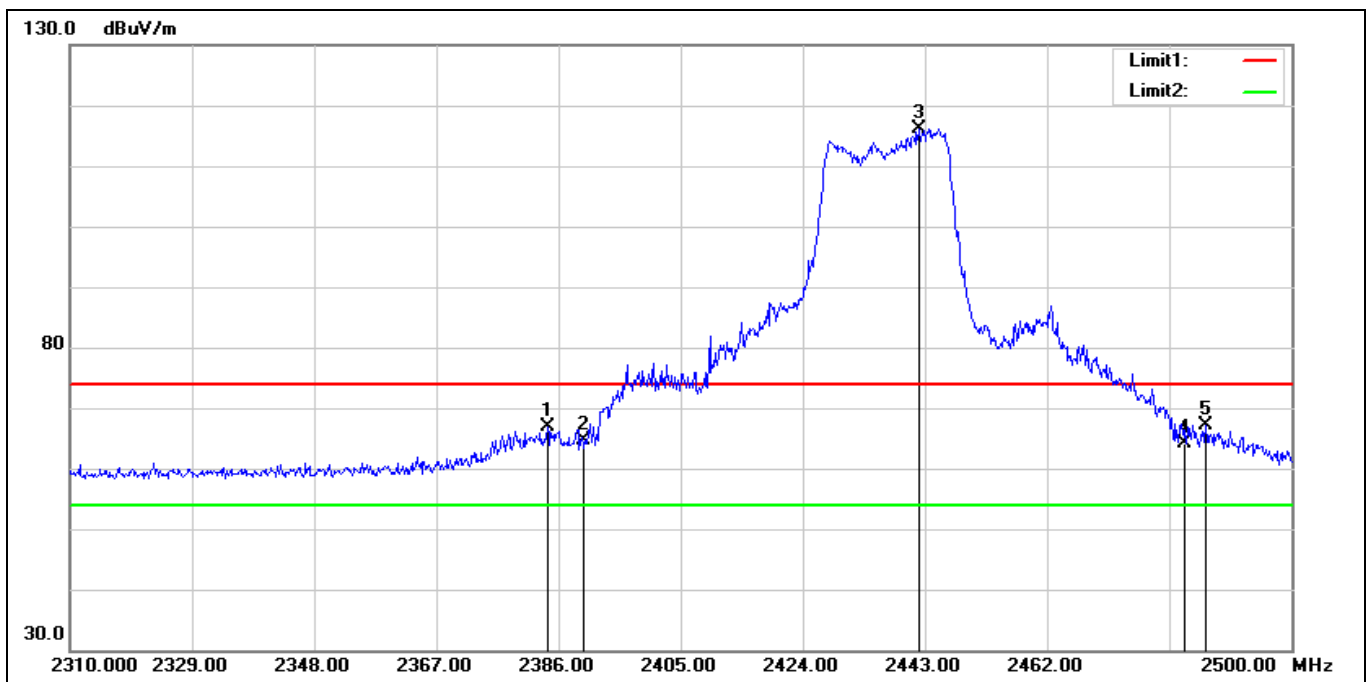


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.290	72.92	-6.07	66.85	74.00	-7.15	peak
2	2390.000	70.70	-6.09	64.61	74.00	-9.39	peak
3*	2442.050	122.10	-6.01	116.09	74.00	42.09	peak
4	2483.500	70.36	-6.13	64.23	74.00	-9.77	peak
5	2486.700	73.34	-6.14	67.20	74.00	-6.80	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

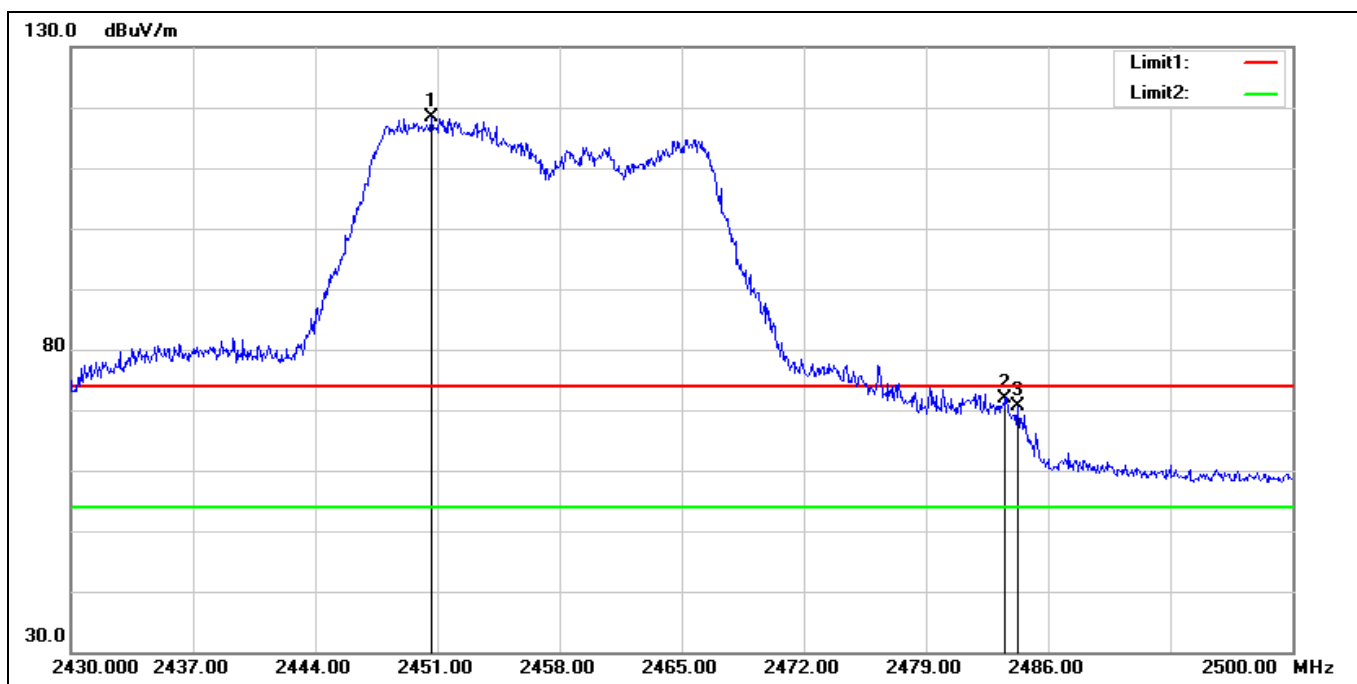


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2450.650	124.38	-5.97	118.41	74.00	44.41	peak
2	2483.500	78.10	-6.13	71.97	74.00	-2.03	peak
3	2484.250	76.74	-6.14	70.60	74.00	-3.40	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2457 MHz		
Remark:			

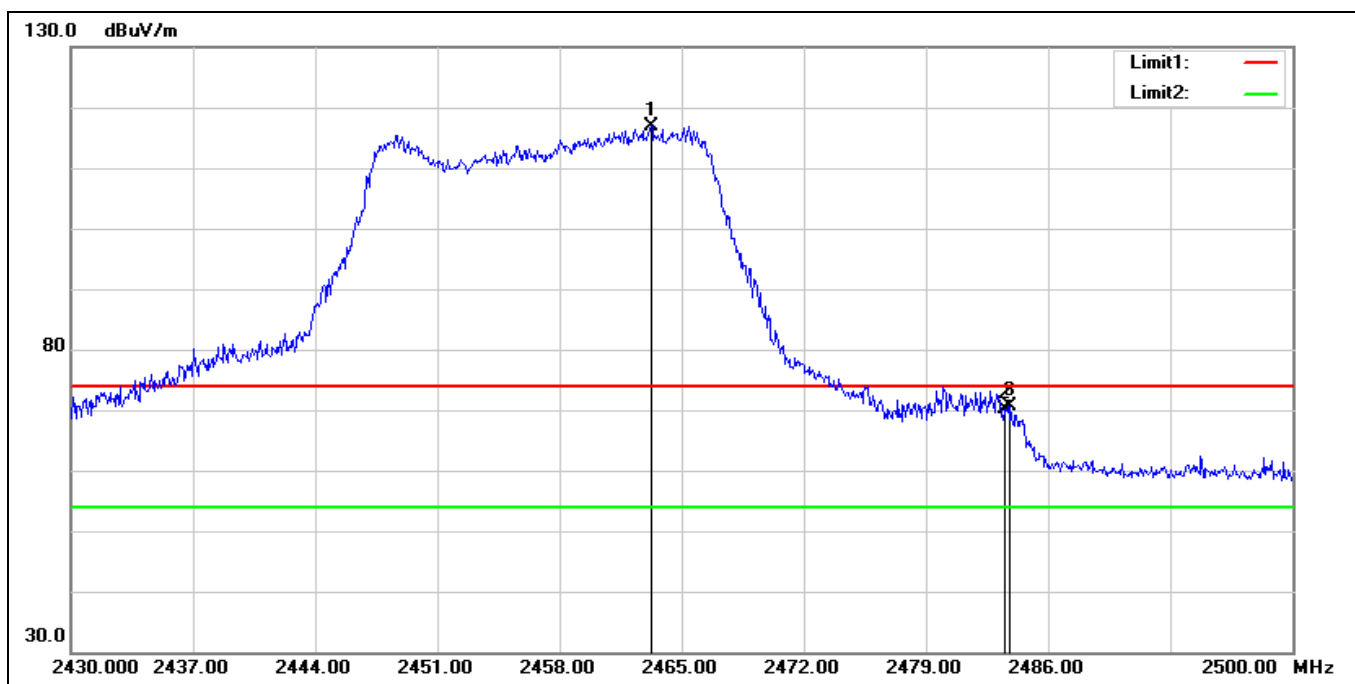


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2463.250	122.87	-6.04	116.83	74.00	42.83	peak
2	2483.500	76.33	-6.13	70.20	74.00	-3.80	peak
3	2483.830	76.73	-6.13	70.60	74.00	-3.40	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

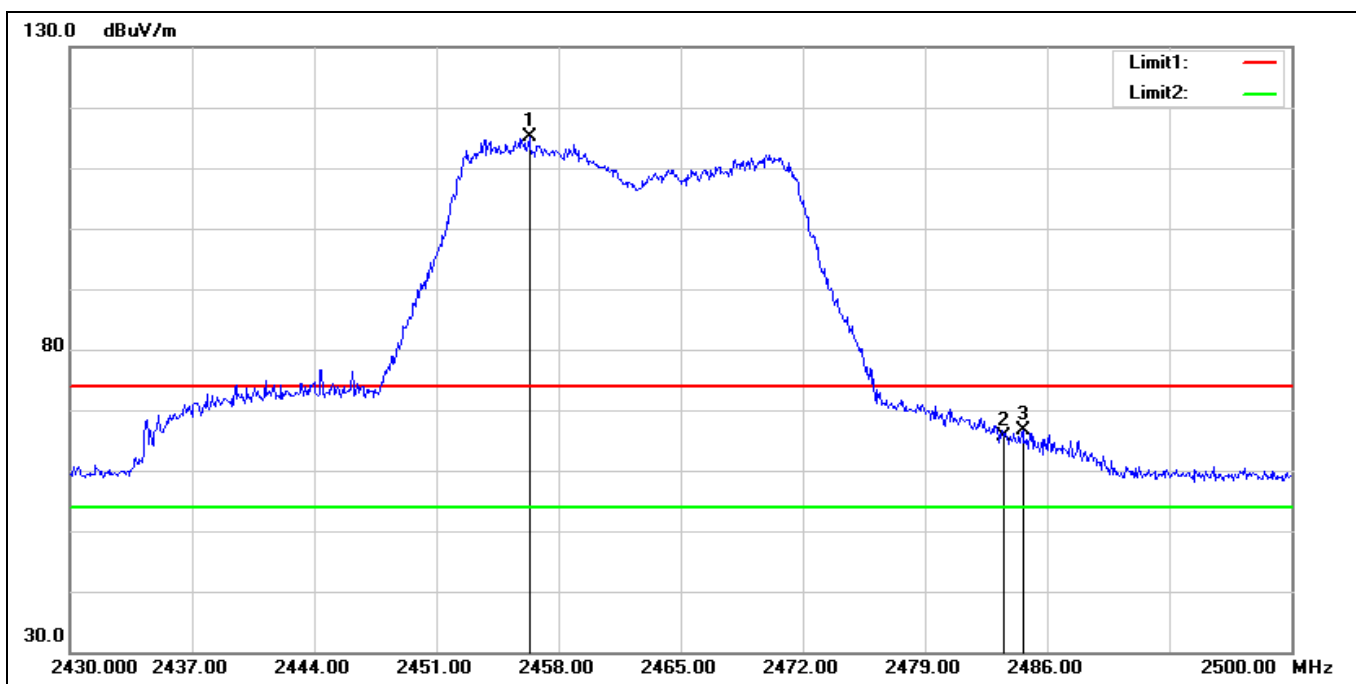


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2456.320	121.16	-6.00	115.16	74.00	41.16	peak
2	2483.500	71.88	-6.13	65.75	74.00	-8.25	peak
3	2484.600	72.68	-6.14	66.54	74.00	-7.46	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 2462 MHz		
Remark:			

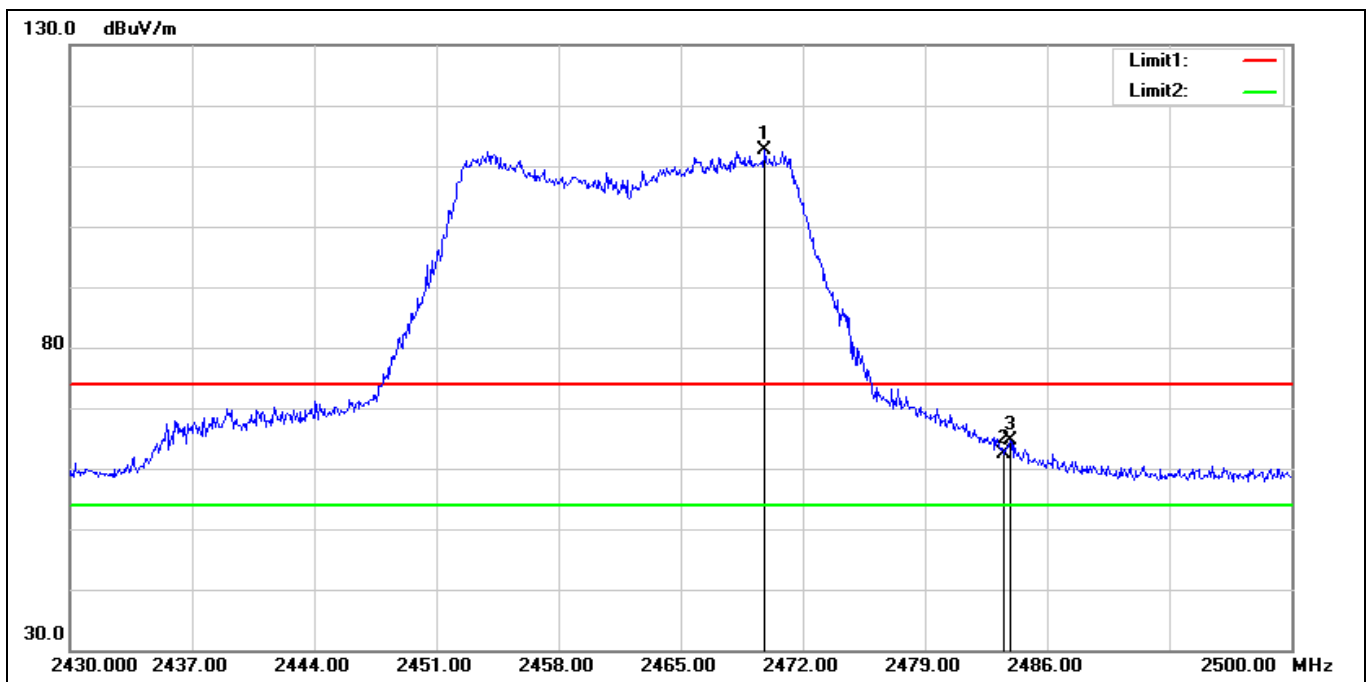


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2469.830	118.64	-6.07	112.57	74.00	38.57	peak
2	2483.500	68.53	-6.13	62.40	74.00	-11.60	peak
3	2483.900	70.88	-6.13	64.75	74.00	-9.25	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

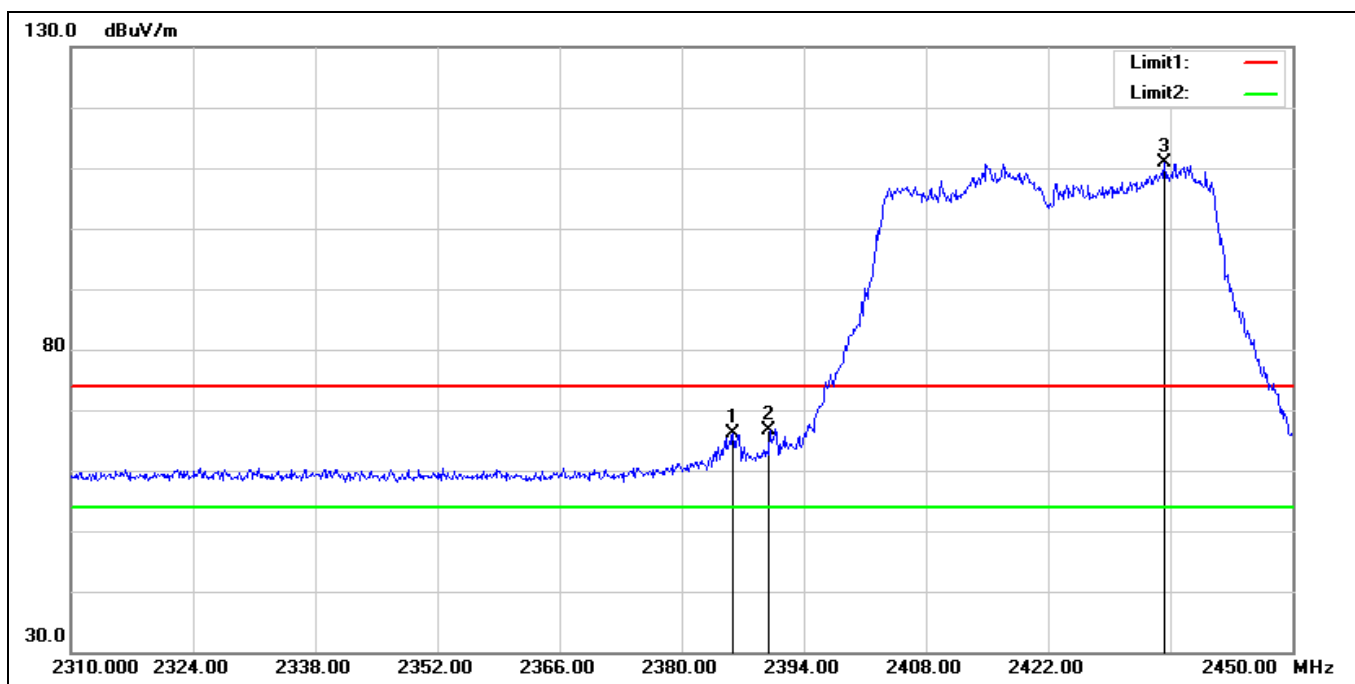


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.880	72.19	-6.08	66.11	74.00	-7.89	peak
2	2390.000	72.60	-6.09	66.51	74.00	-7.49	peak
3*	2435.300	116.96	-6.03	110.93	74.00	36.93	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2422 MHz		
Remark:			

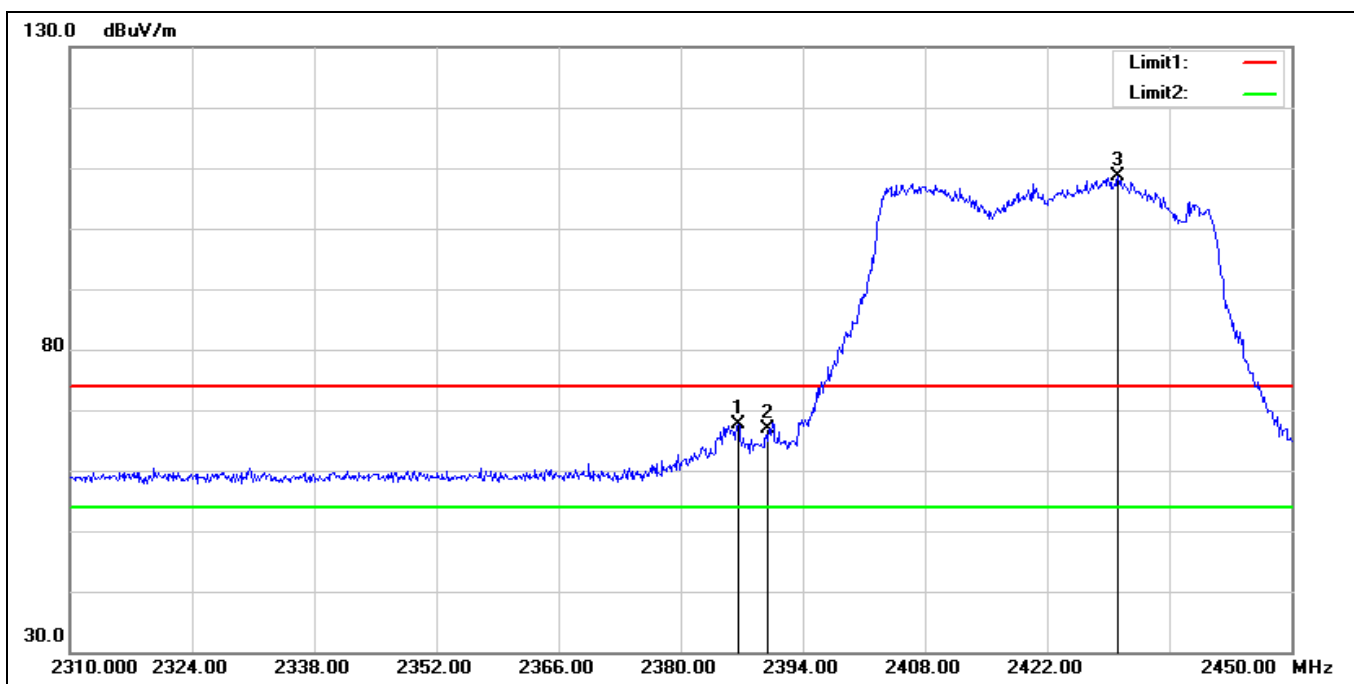


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.580	73.73	-6.08	67.65	74.00	-6.35	peak
2	2390.000	72.93	-6.09	66.84	74.00	-7.16	peak
3*	2430.120	114.57	-6.04	108.53	74.00	34.53	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2427 MHz		
Remark:			

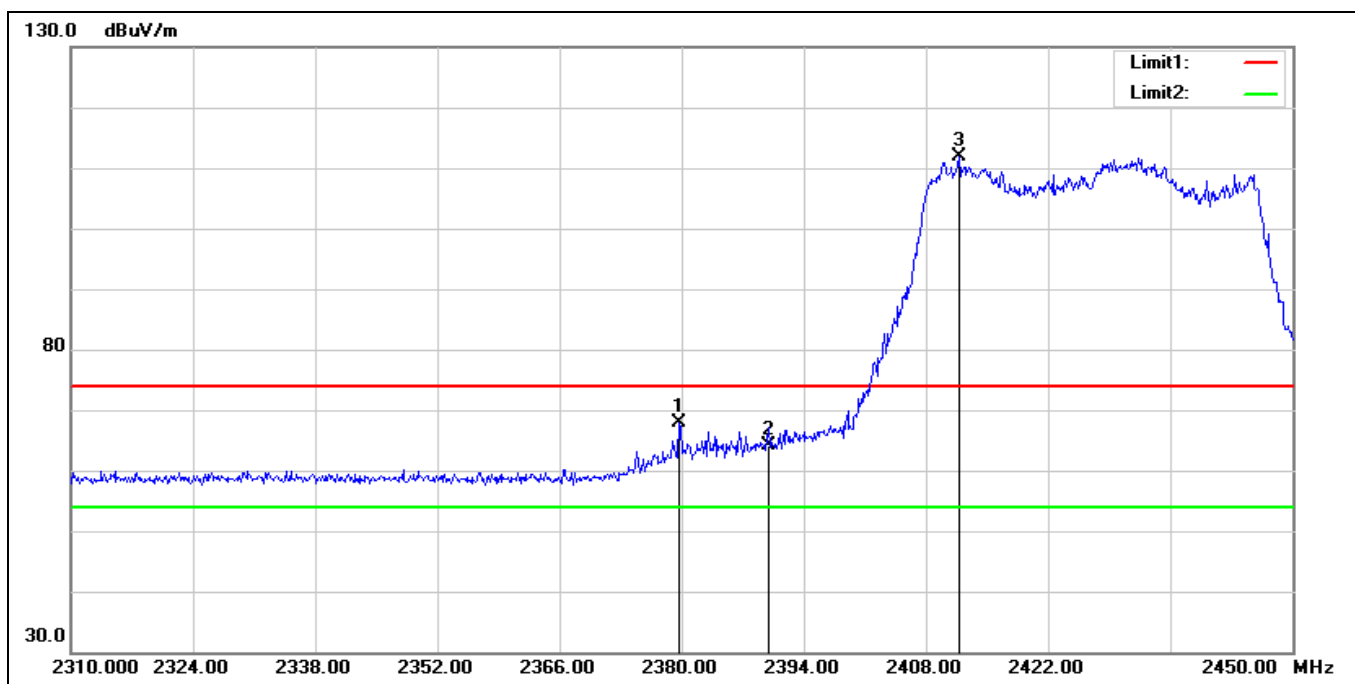


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.720	73.82	-6.04	67.78	74.00	-6.22	peak
2	2390.000	70.31	-6.09	64.22	74.00	-9.78	peak
3*	2411.780	118.10	-6.10	112.00	74.00	38.00	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2427 MHz		
Remark:			

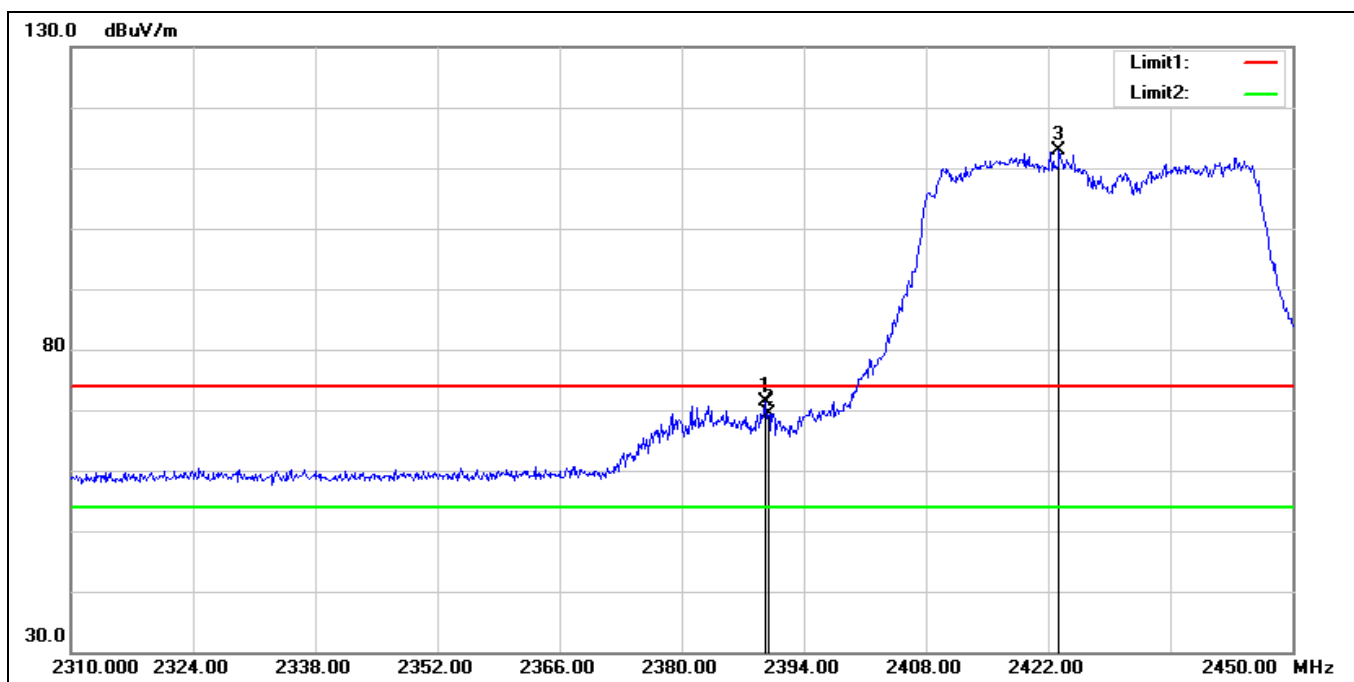


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.520	77.47	-6.09	71.38	74.00	-2.62	peak
2	2390.000	75.43	-6.09	69.34	74.00	-4.66	peak
3*	2423.260	118.82	-6.06	112.76	74.00	38.76	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2437 MHz		
Remark:			

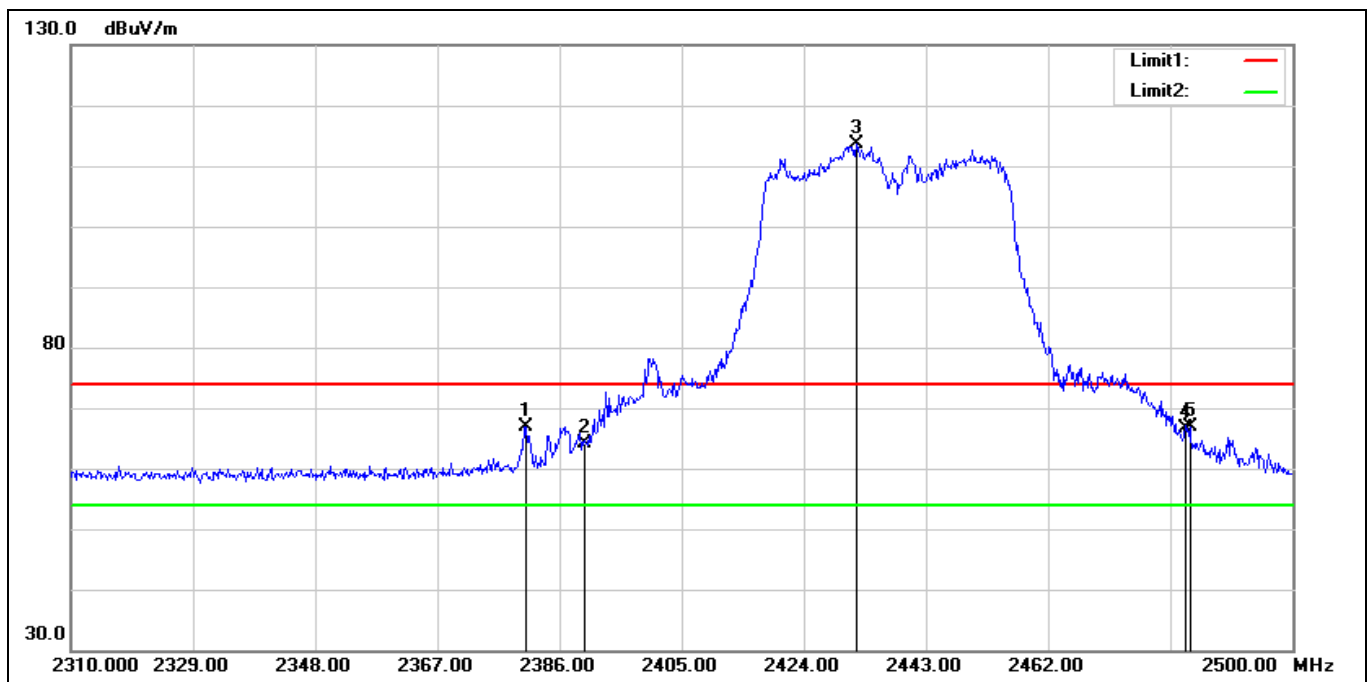


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.870	73.05	-6.05	67.00	74.00	-7.00	peak
2	2390.000	70.26	-6.09	64.17	74.00	-9.83	peak
3*	2432.170	119.77	-6.04	113.73	74.00	39.73	peak
4	2483.500	72.86	-6.13	66.73	74.00	-7.27	peak
5	2484.040	72.91	-6.13	66.78	74.00	-7.22	peak

Standard: Part 15C Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 2437 MHz
Remark:

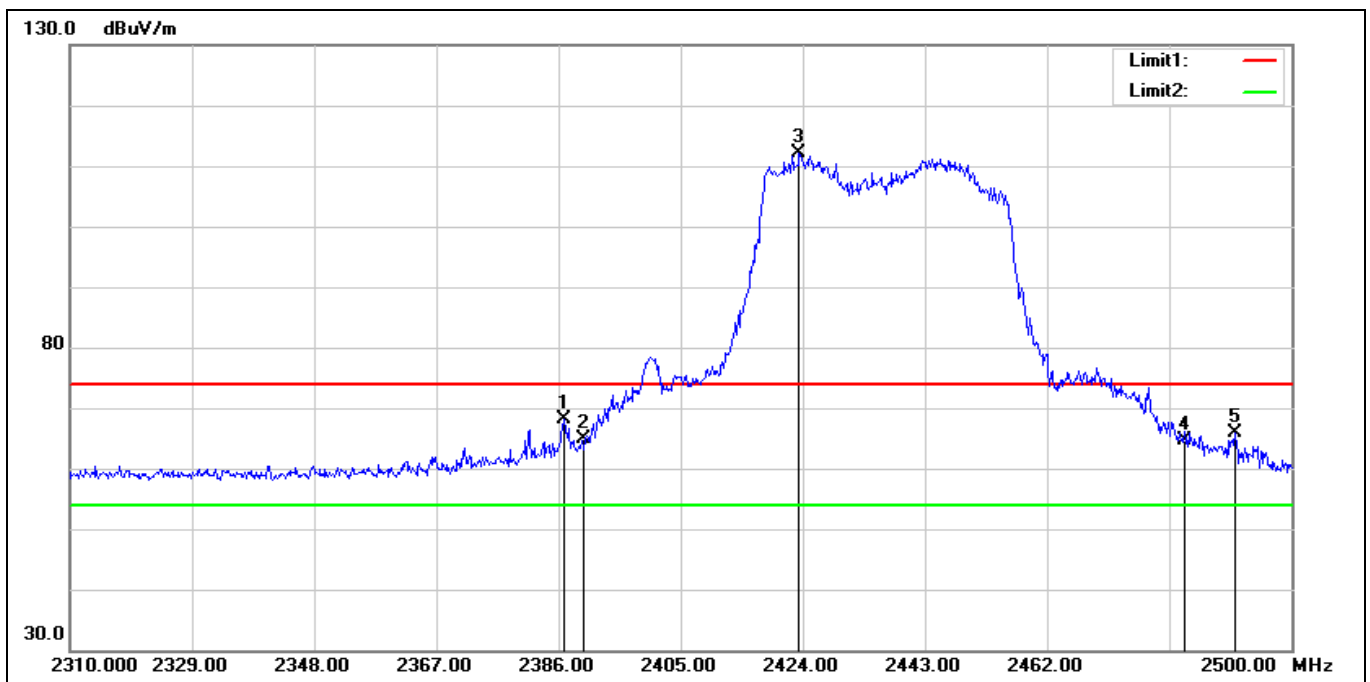


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.950	74.13	-6.08	68.05	74.00	-5.95	peak
2	2390.000	71.06	-6.09	64.97	74.00	-9.03	peak
3*	2423.430	118.30	-6.06	112.24	74.00	38.24	peak
4	2483.500	70.71	-6.13	64.58	74.00	-9.42	peak
5	2491.260	72.07	-6.17	65.90	74.00	-8.10	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2447 MHz		
Remark:			

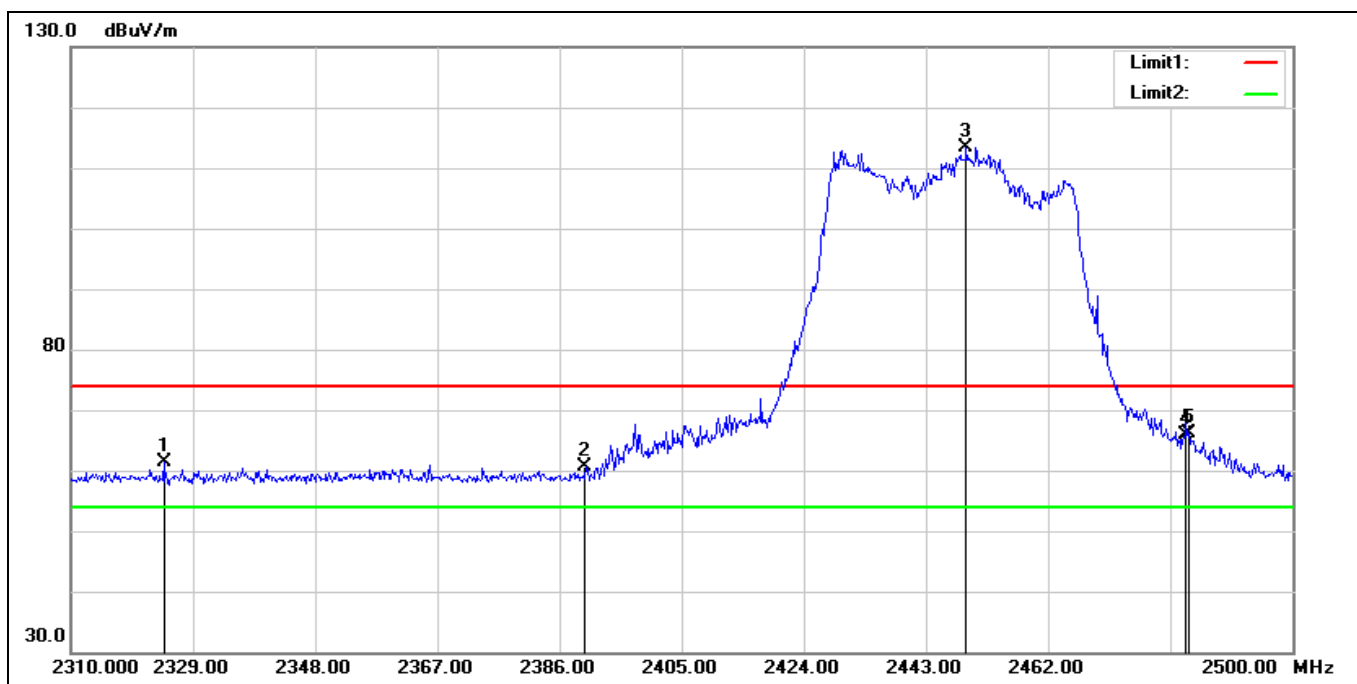


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2324.440	67.43	-5.94	61.49	74.00	-12.51	peak
2	2390.000	66.61	-6.09	60.52	74.00	-13.48	peak
3*	2449.270	119.41	-5.97	113.44	74.00	39.44	peak
4	2483.500	72.05	-6.13	65.92	74.00	-8.08	peak
5	2483.850	72.32	-6.13	66.19	74.00	-7.81	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2447 MHz		
Remark:			

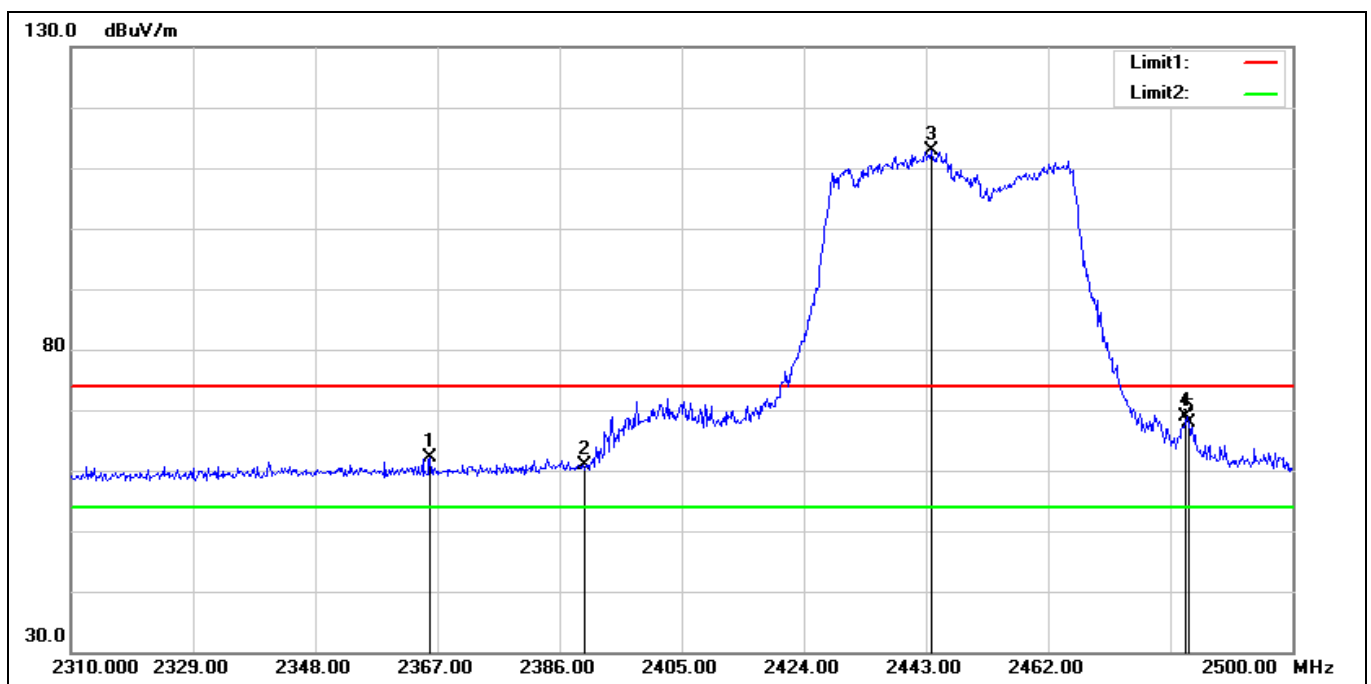


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.860	68.19	-5.98	62.21	74.00	-11.79	peak
2	2390.000	66.90	-6.09	60.81	74.00	-13.19	peak
3*	2443.760	118.95	-5.99	112.96	74.00	38.96	peak
4	2483.500	74.89	-6.13	68.76	74.00	-5.24	peak
5	2483.850	74.00	-6.13	67.87	74.00	-6.13	peak

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

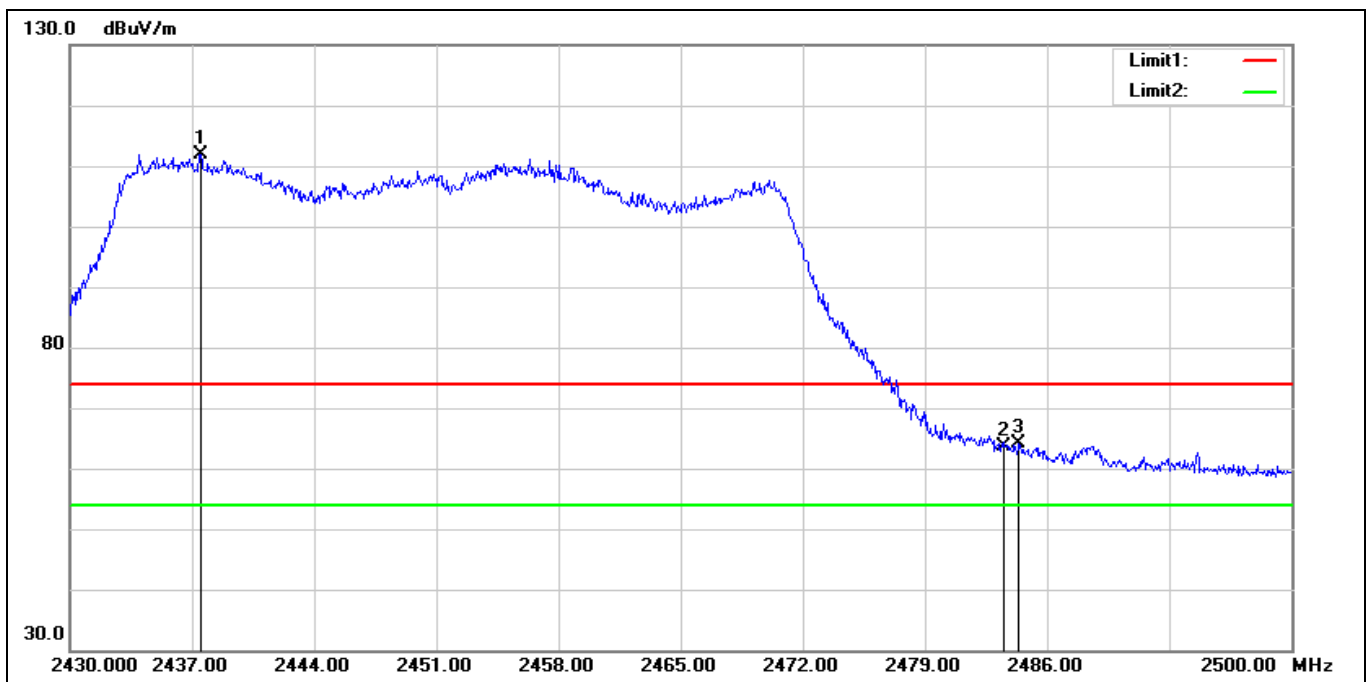

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2437.490	117.90	-6.02	111.88	74.00	37.88	peak
2	2483.500	69.85	-6.13	63.72	74.00	-10.28	peak
3	2484.390	70.21	-6.14	64.07	74.00	-9.93	peak


Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 2452 MHz		
Remark:			

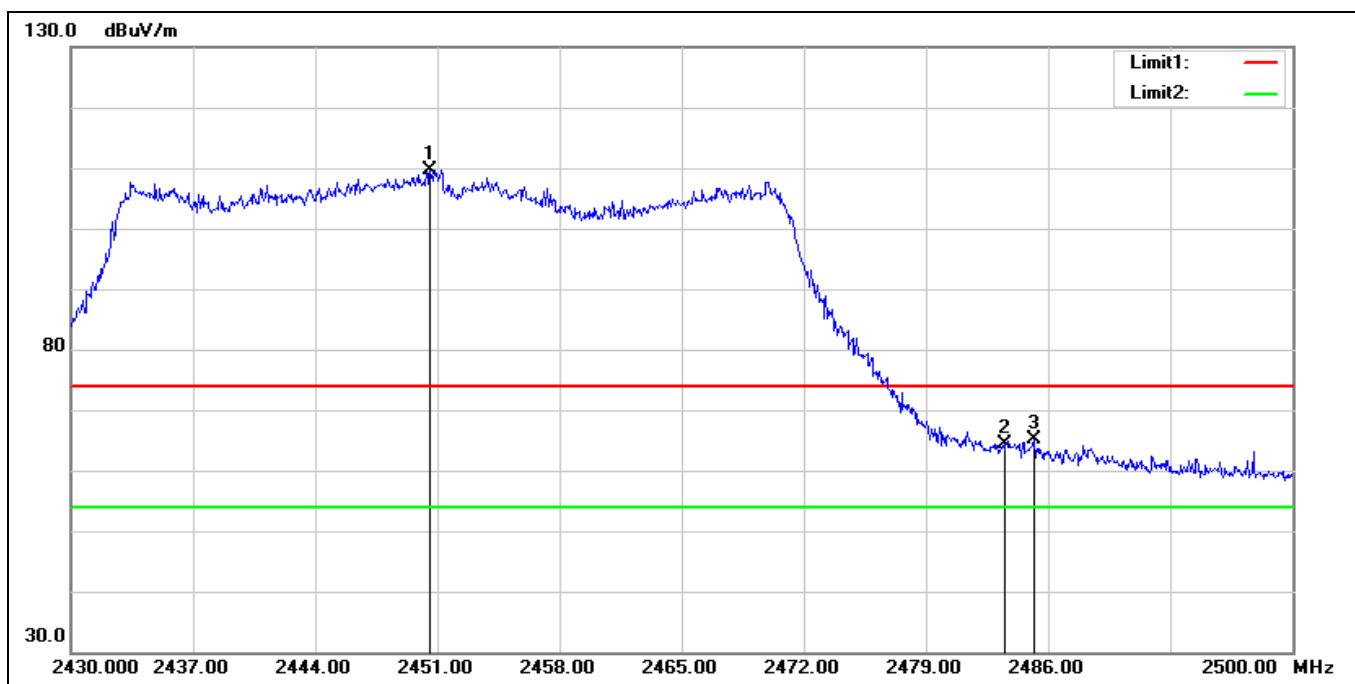

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2450.580	115.72	-5.97	109.75	74.00	35.75	peak
2	2483.500	70.52	-6.13	64.39	74.00	-9.61	peak
3	2485.160	71.38	-6.14	65.24	74.00	-8.76	peak


Average

Standard: Part 15C Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11b 2412 MHz
Remark:

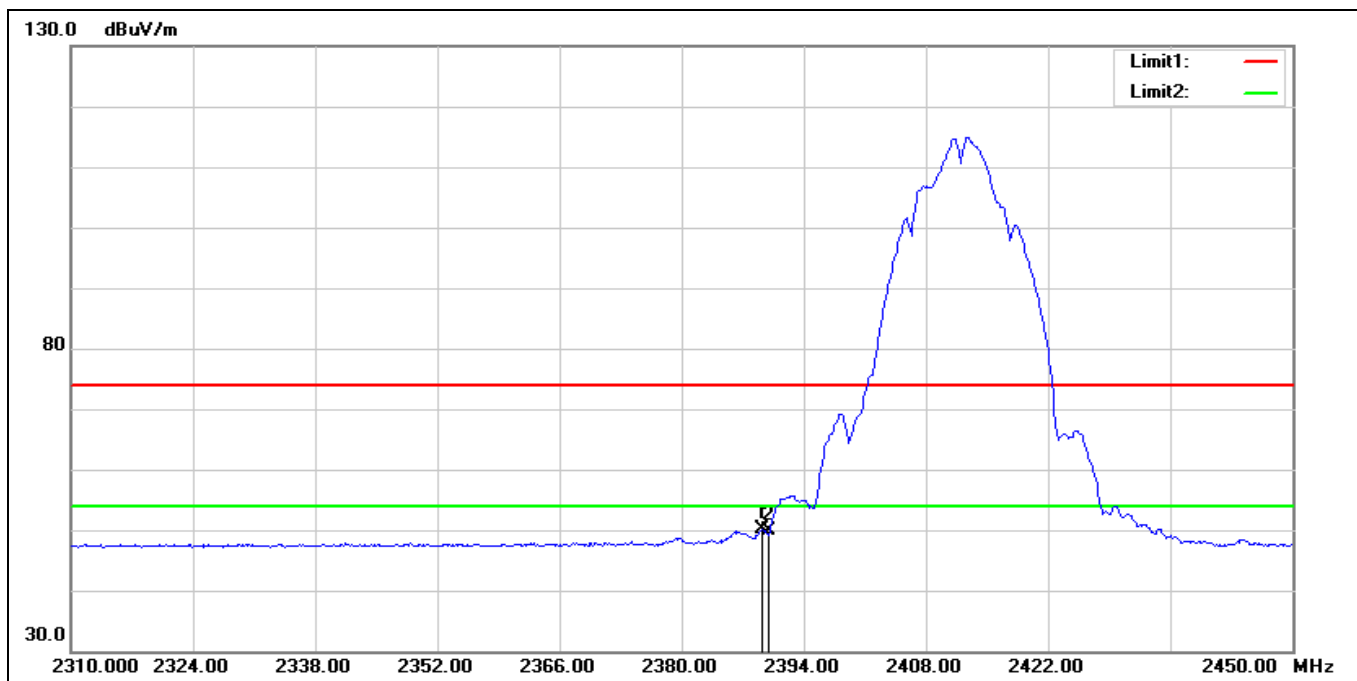


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.240	56.23	-6.09	50.14	54.00	-3.86	AVG
2	2390.000	55.89	-6.09	49.80	54.00	-4.20	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2412 MHz		
Remark:			

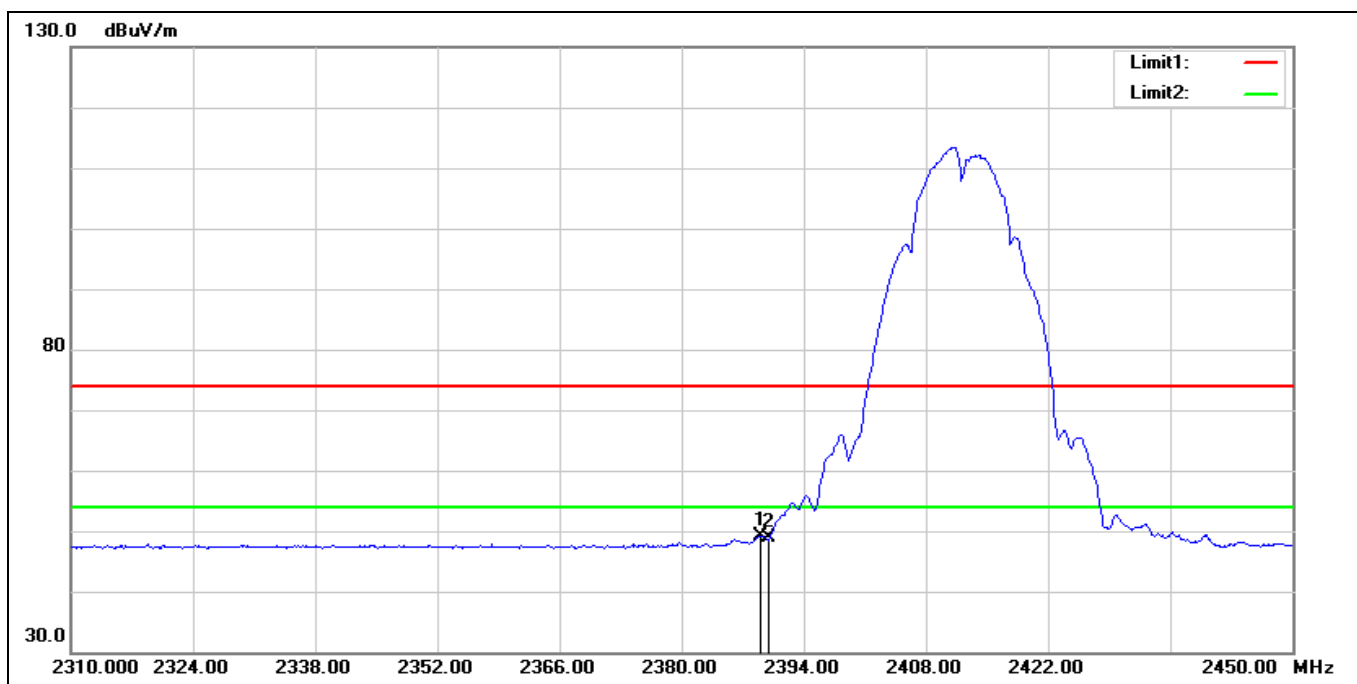


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2388.960	55.30	-6.08	49.22	54.00	-4.78	AVG
2	2390.000	54.92	-6.09	48.83	54.00	-5.17	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2437 MHz		
Remark:			

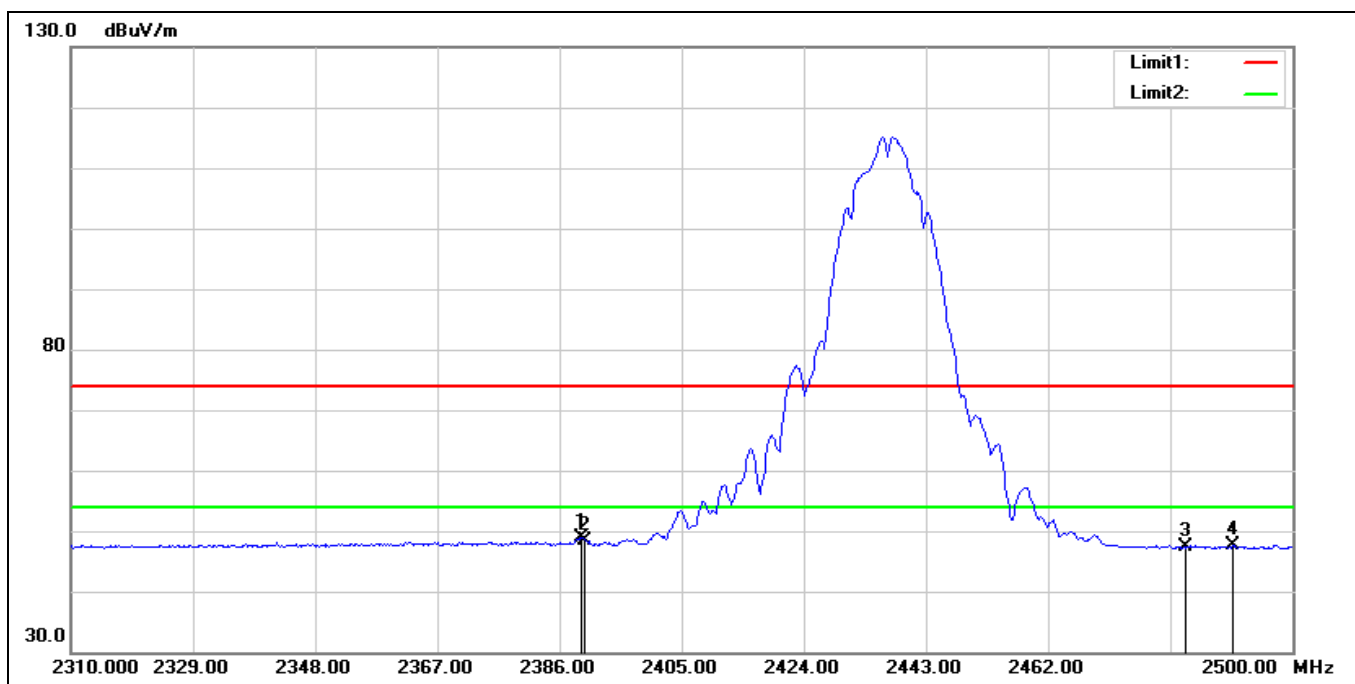


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.420	55.00	-6.09	48.91	54.00	-5.09	AVG
2	2390.000	54.37	-6.09	48.28	54.00	-5.72	AVG
3	2483.500	53.51	-6.13	47.38	54.00	-6.62	AVG
4	2490.690	53.91	-6.16	47.75	54.00	-6.25	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11b 2437 MHz		
Remark:			

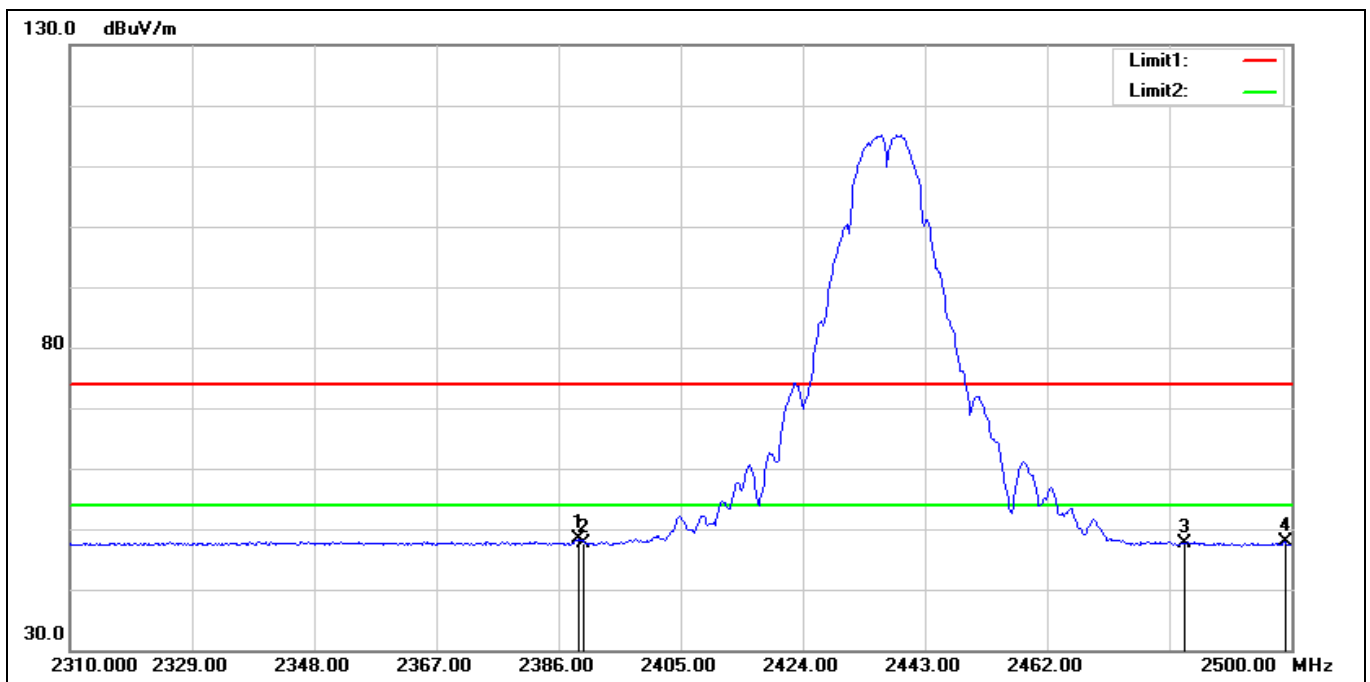

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	2389.040	54.36	-6.08	48.28	54.00	-5.72	AVG
2	2390.000	53.76	-6.09	47.67	54.00	-6.33	AVG
3	2483.500	53.77	-6.13	47.64	54.00	-6.36	AVG
4	2499.050	54.03	-6.20	47.83	54.00	-6.17	AVG

Standard:	Part 15C	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11b 2462 MHz		
Remark:			

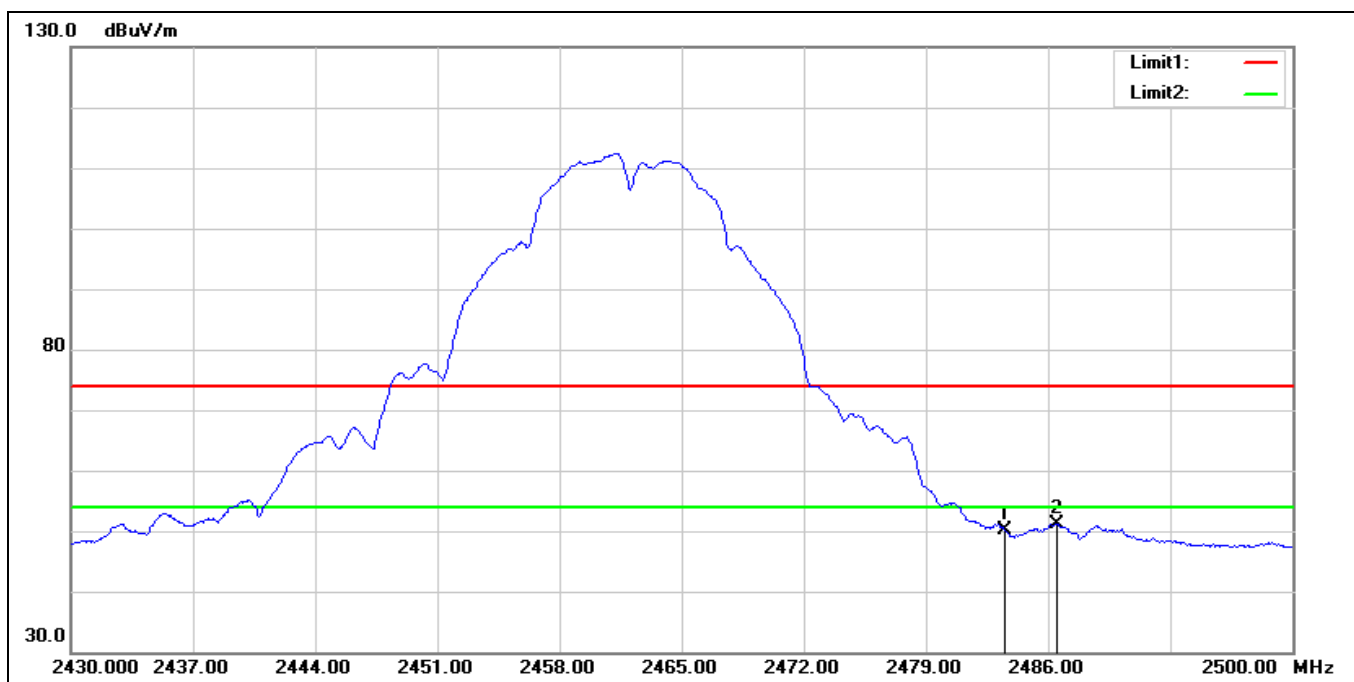

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	56.28	-6.13	50.15	54.00	-3.85	AVG
2*	2486.490	57.25	-6.14	51.11	54.00	-2.89	AVG