


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.22	-0.73	-0.58	-5.18	-2.41	-1.79
MAX. Gain	-0.58dB					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	14.5mm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD					
Address	1402, Huafeng New Energy Technology Industry Building, Xixiang Street, Bao'an District, Shenzhen					

Antenna Photo & Length (mm)

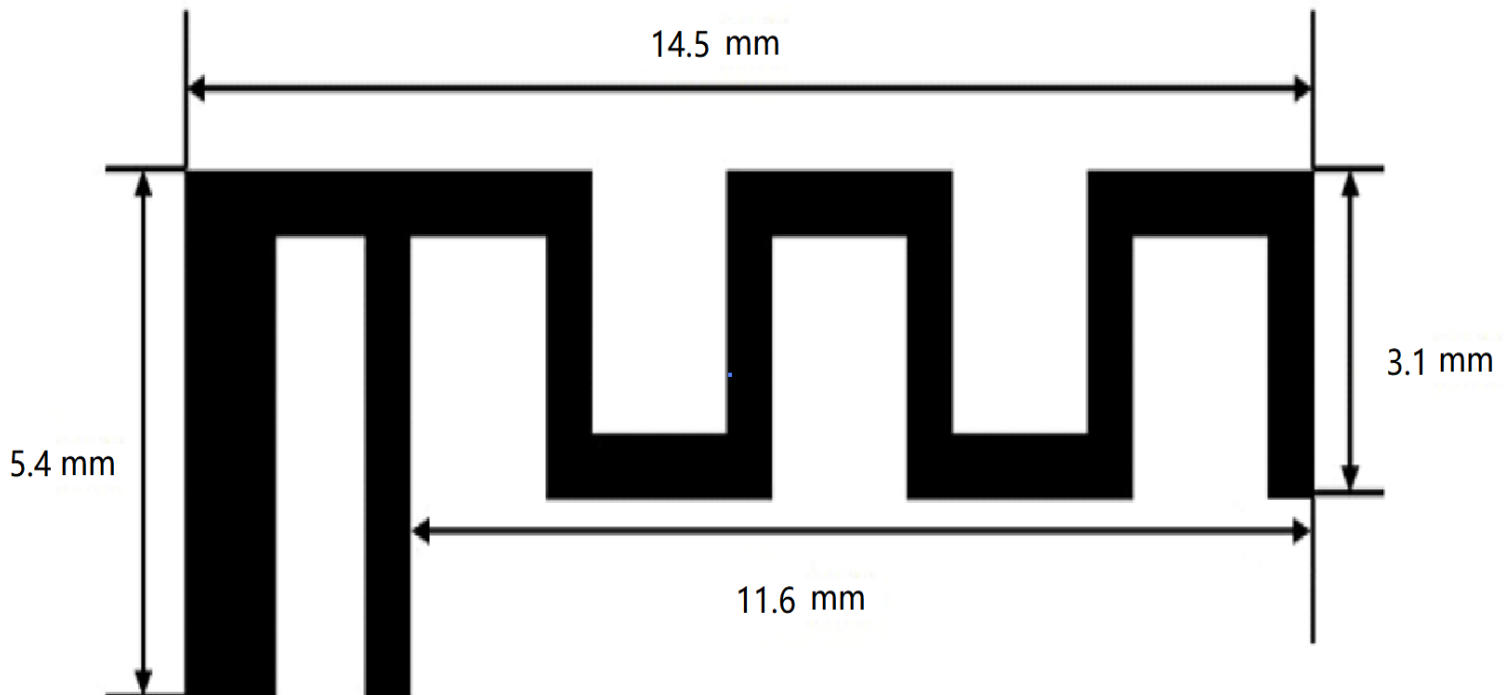

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div



Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.22132	-30.0210	-7.15612
2450	-0.735205	-36.5310	-7.46019
2500	-0.583219	-22.1012	-6.56108

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div



Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.1886	-22.0965	-12.3695
2450	-2.4185	-24.5323	-10.5012
2500	-1.7986	-29.4952	-9.18523

ANT Test Labs: Attestation of Global Compliance Co., Ltd.