

Annex A. Plots of System Performance Check

MEASUREMENT 1

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-15
Measurement duration: 7 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative Permittivity (real part)	42.342824
Conductivity (S/m)	0.851347
Power Variation (%)	1.178100
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

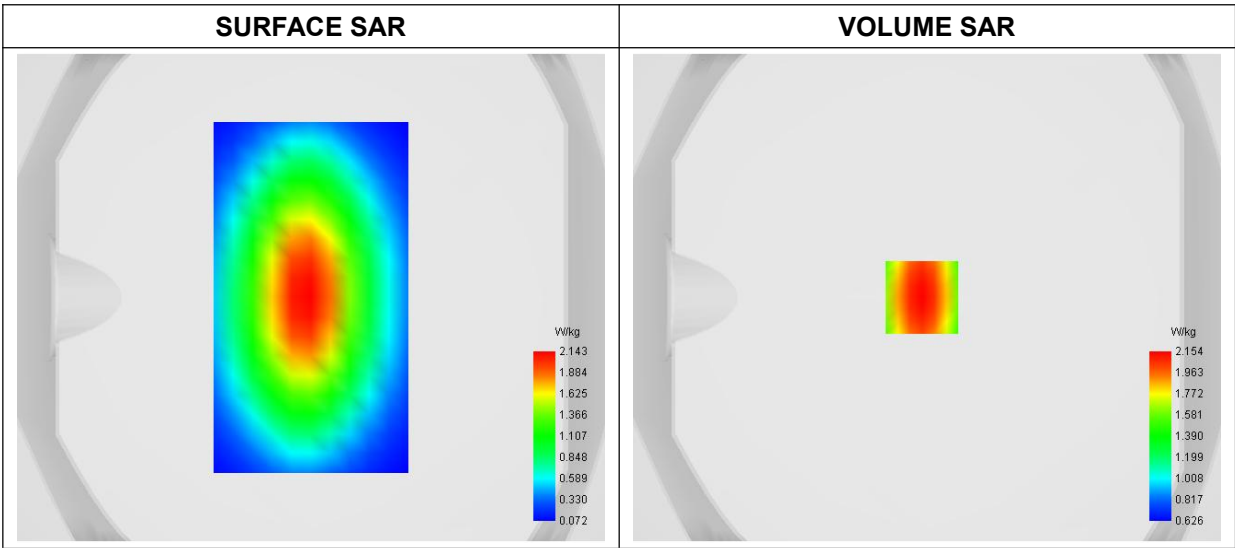


Maximum location: X=-2.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.430855
SAR 1g (W/Kg)	2.051374

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	2.8268	2.1542	1.6473	1.2759	1.0033

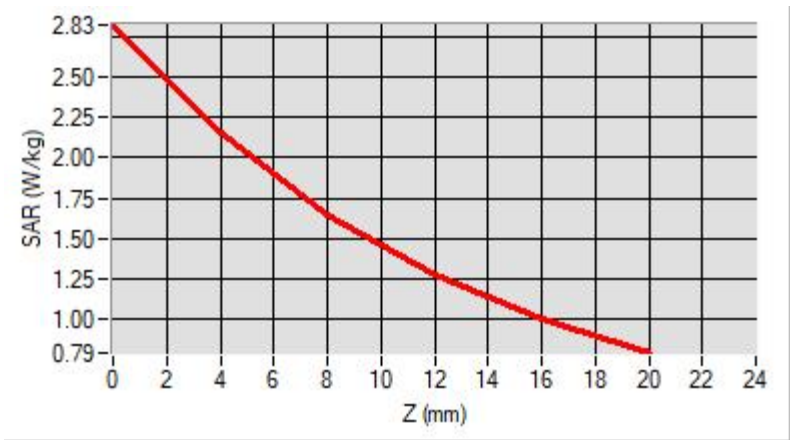

F. 3D Image

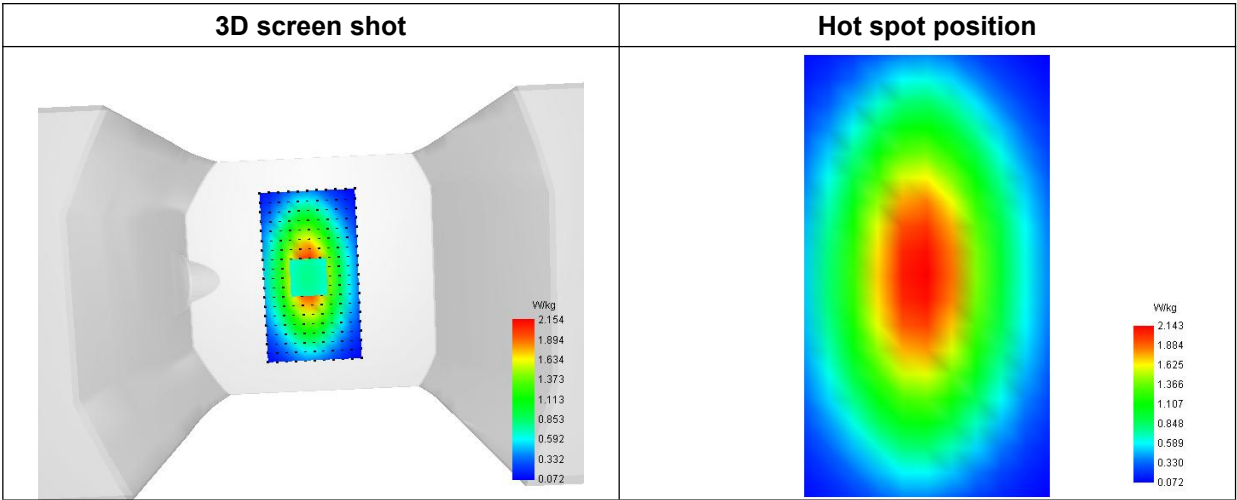

MEASUREMENT 2

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative Permittivity (real part)	42.311524
Conductivity (S/m)	0.864176
Power Variation (%)	-1.884700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

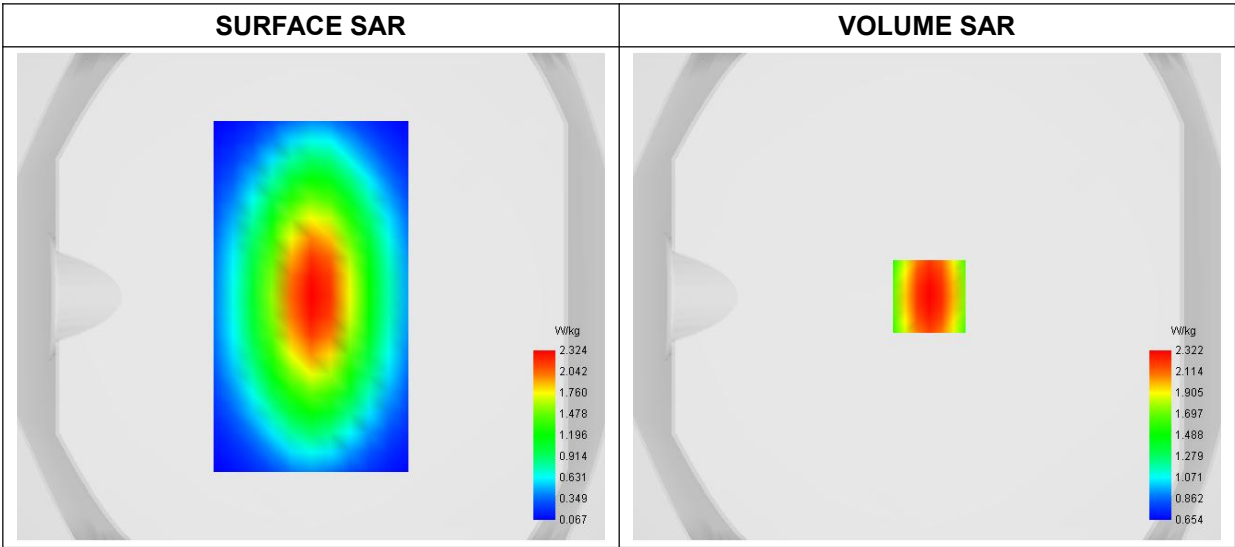


Maximum location: X=1.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.527360
SAR 1g (W/Kg)	2.210386

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	3.0677	2.3224	1.7644	1.3585	1.0631

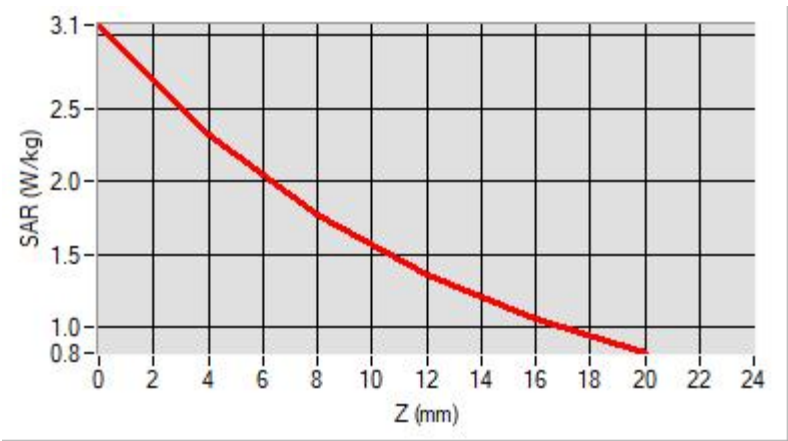

F. 3D Image

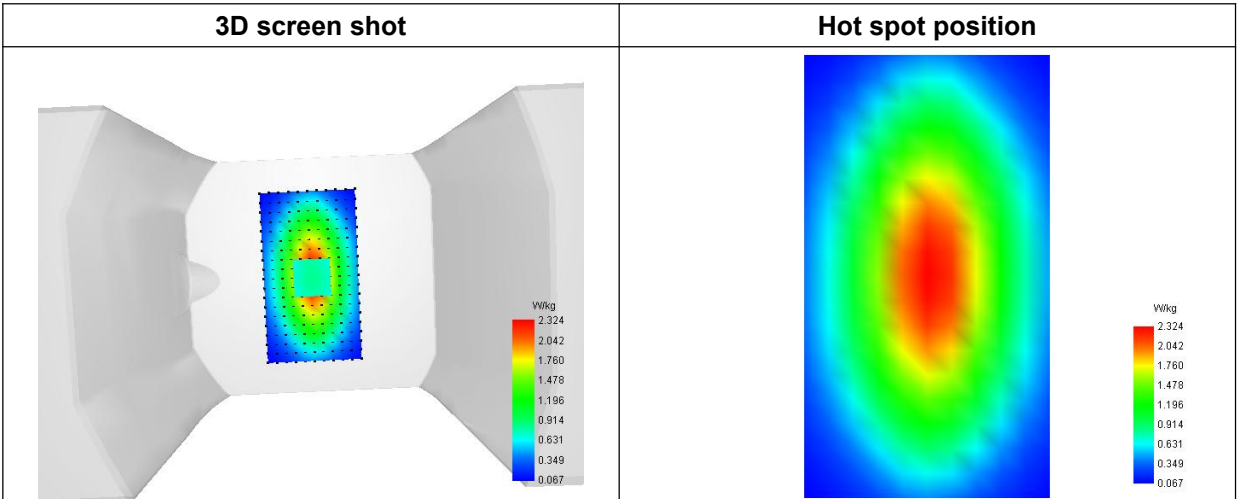

MEASUREMENT 3

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative Permittivity (real part)	39.281747
Conductivity (S/m)	1.373814
Power Variation (%)	1.425800
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

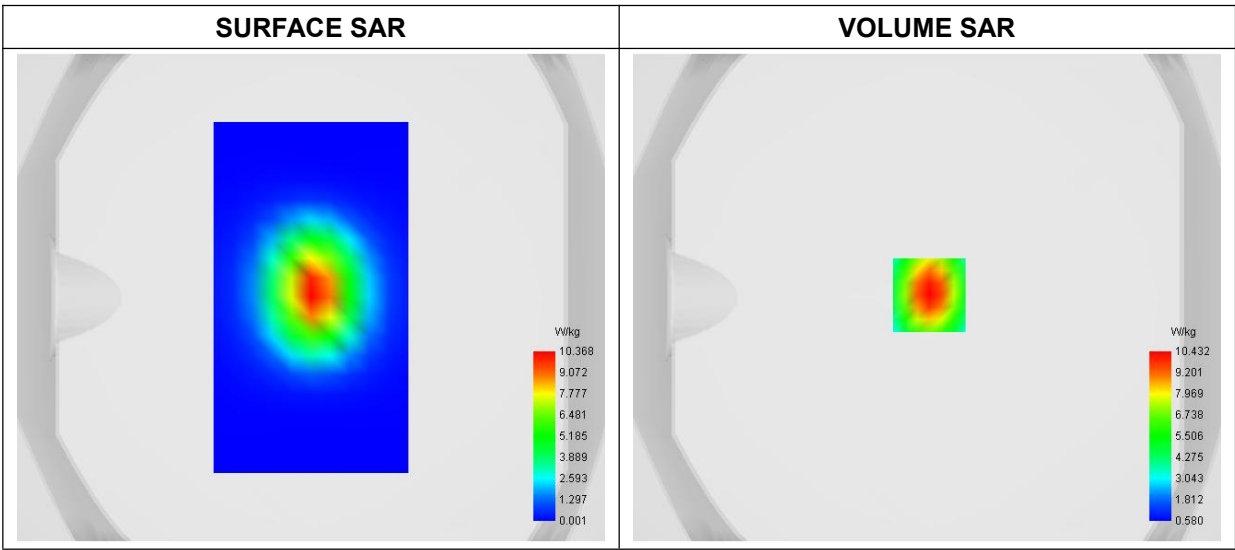


Maximum location: X=1.00, Y=1.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	4.968858
SAR 1g (W/Kg)	9.623880

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	17.3936	10.4322	6.1187	3.6132	2.2066

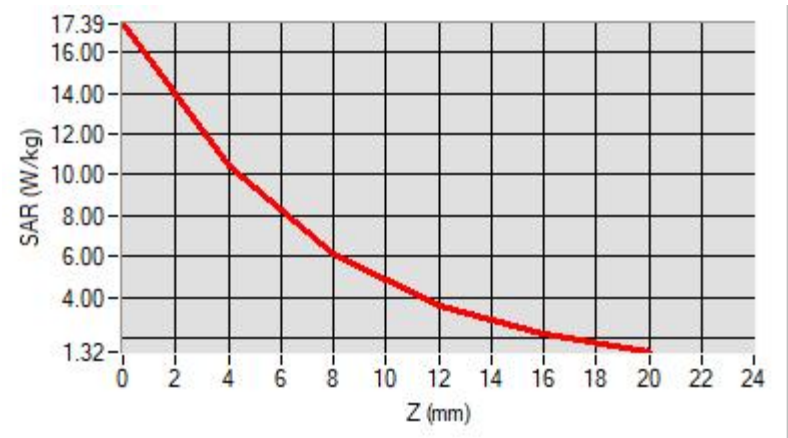

F. 3D Image

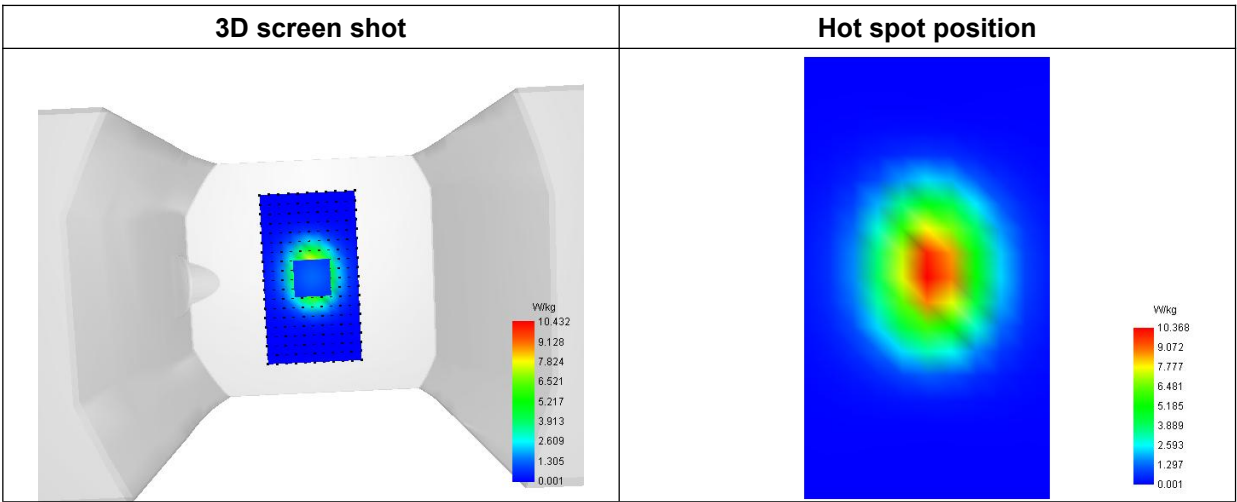

MEASUREMENT 4

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-25
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.21; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	41.254525
Conductivity (S/m)	1.391831
Power Variation (%)	-1.224700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

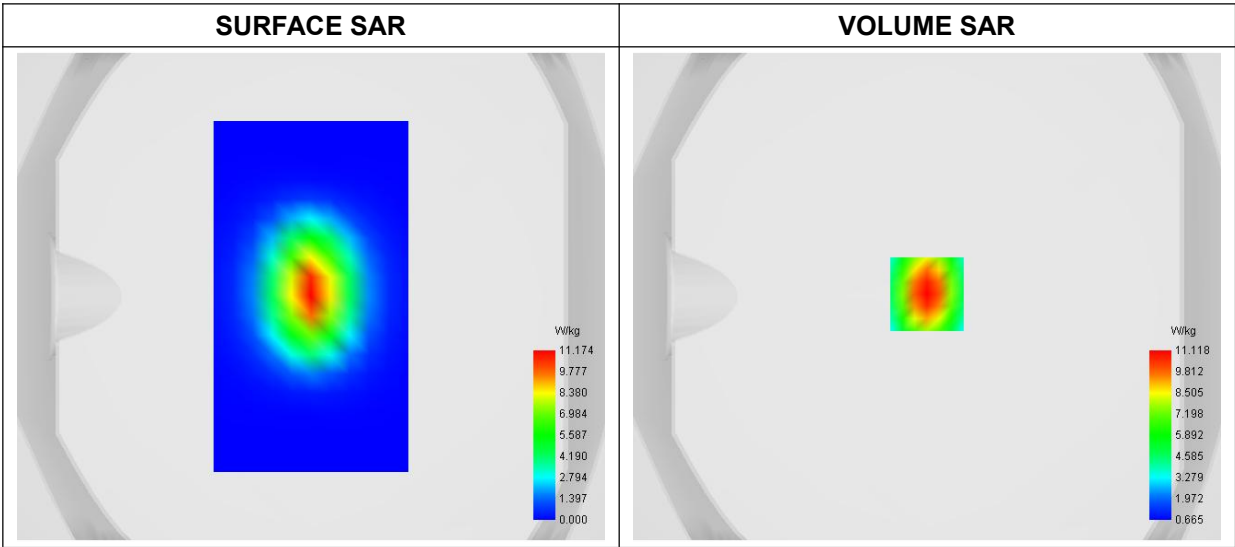


Maximum location: X=0.00, Y=1.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.260825
SAR 1g (W/Kg)	10.222516

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	18.6940	11.1182	6.4717	3.8103	2.3414

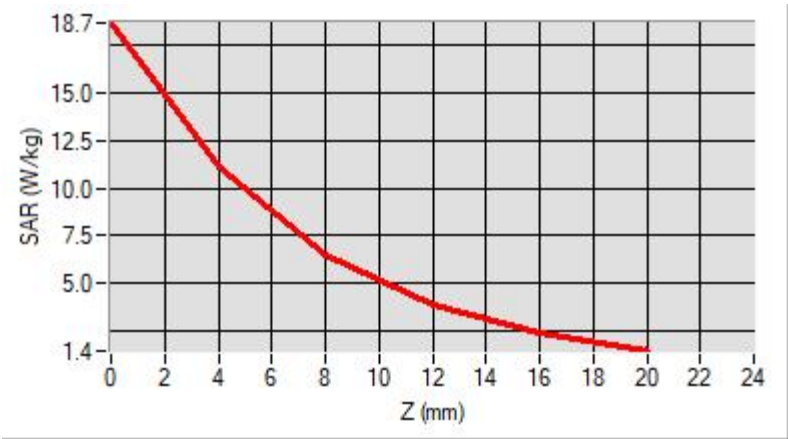

F. 3D Image

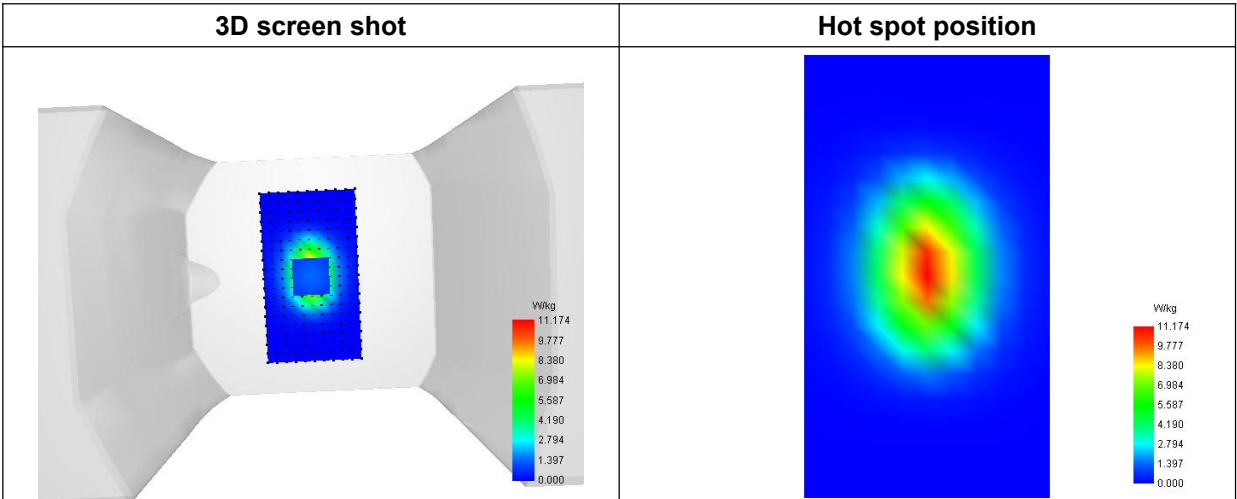

MEASUREMENT 5

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-08-01
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative Permittivity (real part)	39.092289
Conductivity (S/m)	1.724618
Power Variation (%)	1.475200
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

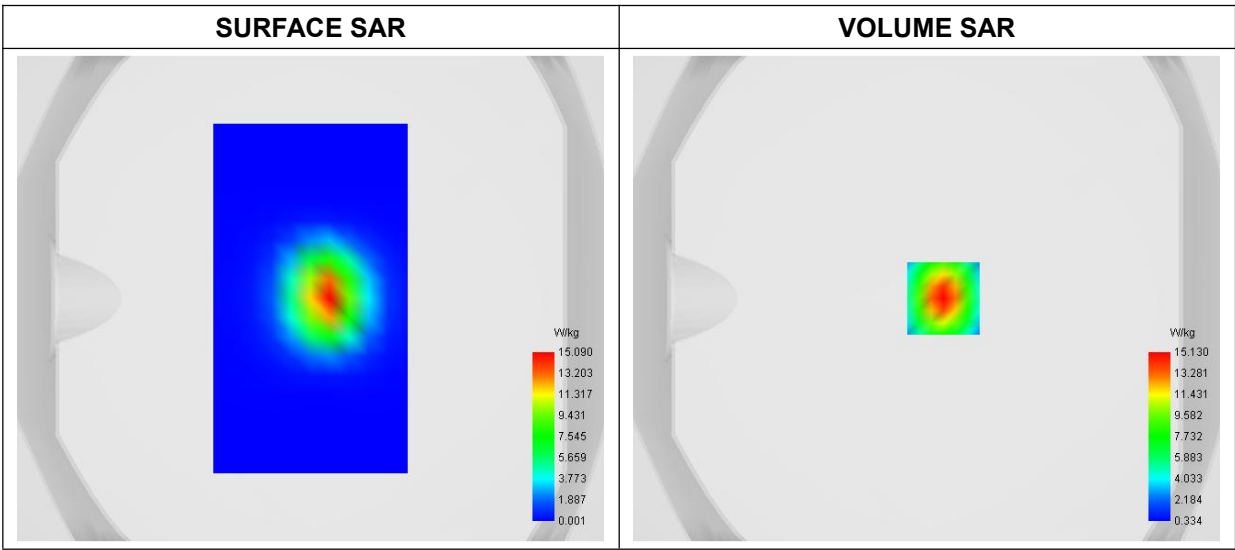

Maximum location: X=7.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	6.149024
SAR 1g (W/Kg)	13.746586

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	28.7959	15.1301	7.5430	3.7436	1.9810



F. 3D Image

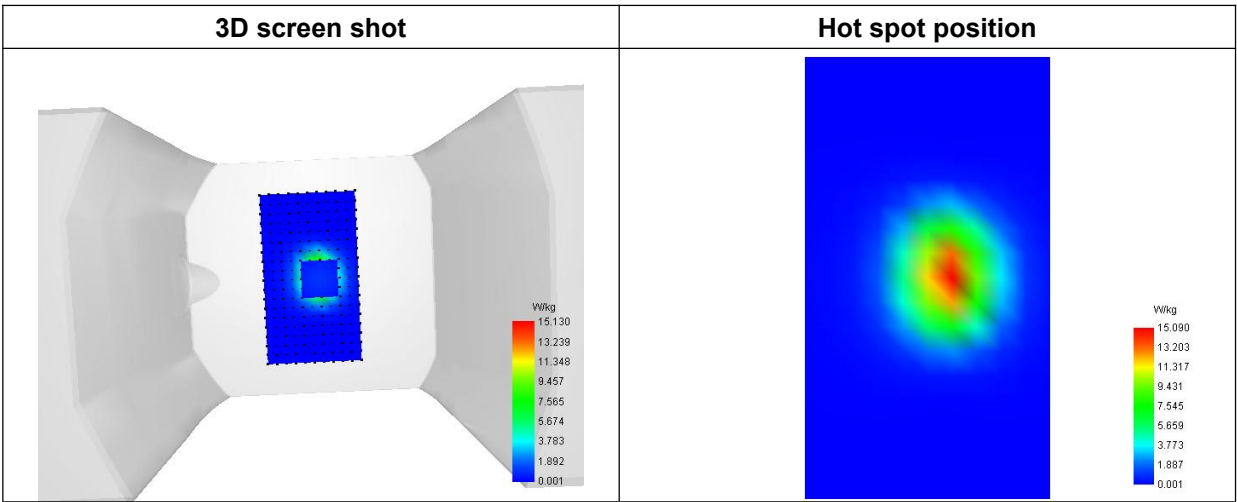

MEASUREMENT 6

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-26
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.22; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative Permittivity (real part)	38.771864
Conductivity (S/m)	1.922478
Power Variation (%)	1.344100
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

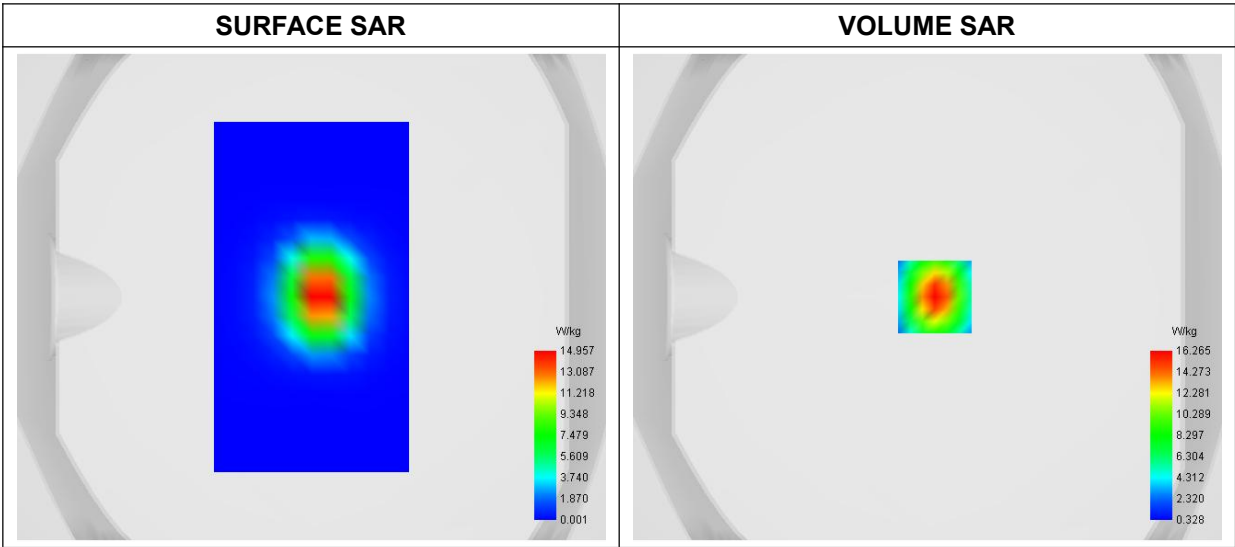


Maximum location: X=3.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	6.553727
SAR 1g (W/Kg)	14.814545

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	31.1802	16.2650	8.0339	3.9472	2.0732

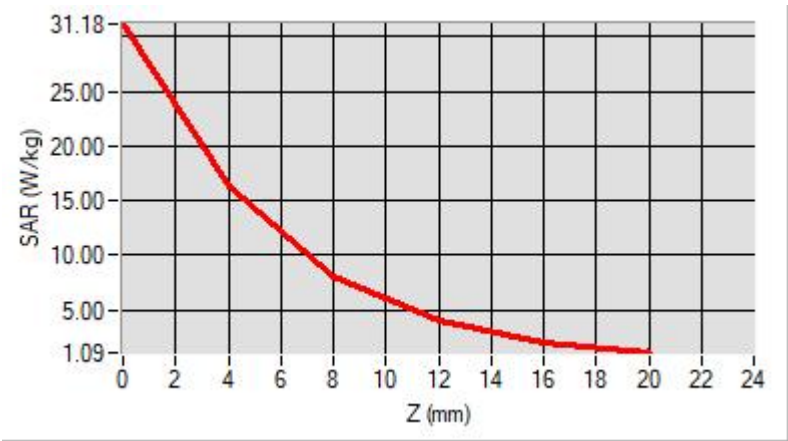

F. 3D Image

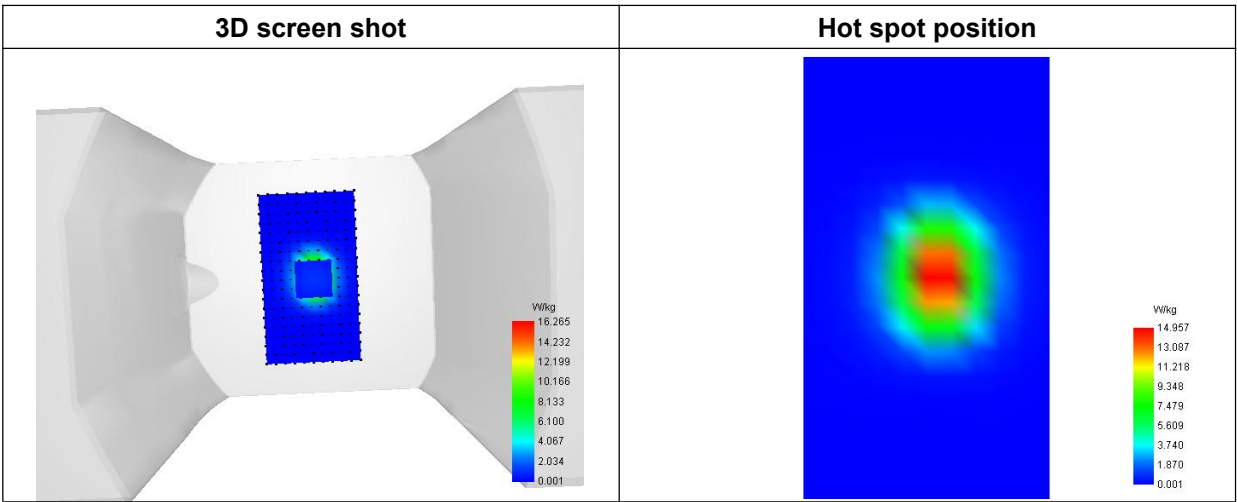

MEASUREMENT 7

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-30
Measurement duration: 7 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2023-07-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW3500
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921373
Conductivity (S/m)	3.051287
Power Variation (%)	0.365431
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

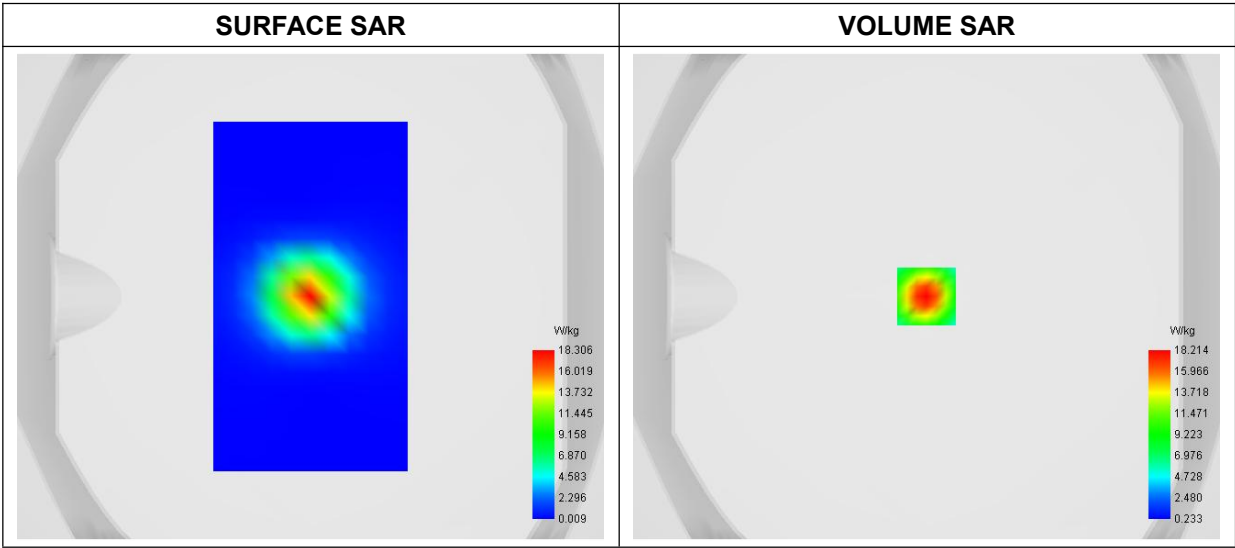


Maximum location: X=0.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	6.791900
SAR 1g (W/Kg)	16.854076

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	40.552	18.213	11.791	7.4928	4.7792	3.0841	2.0253	1.3521	0.9043
	1	7	4						

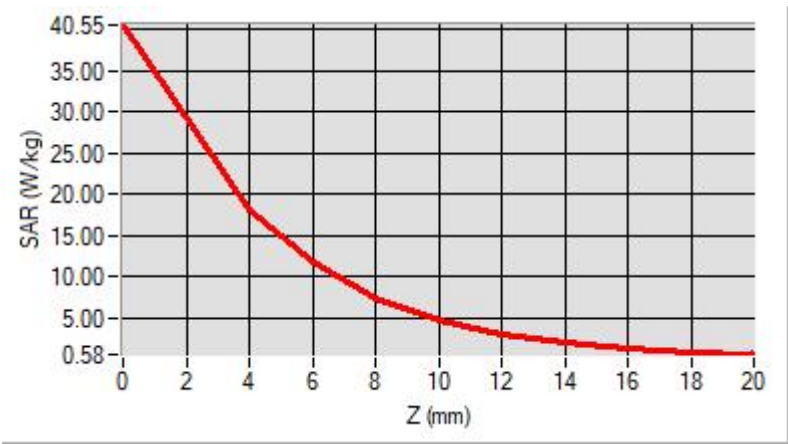

F. 3D Image

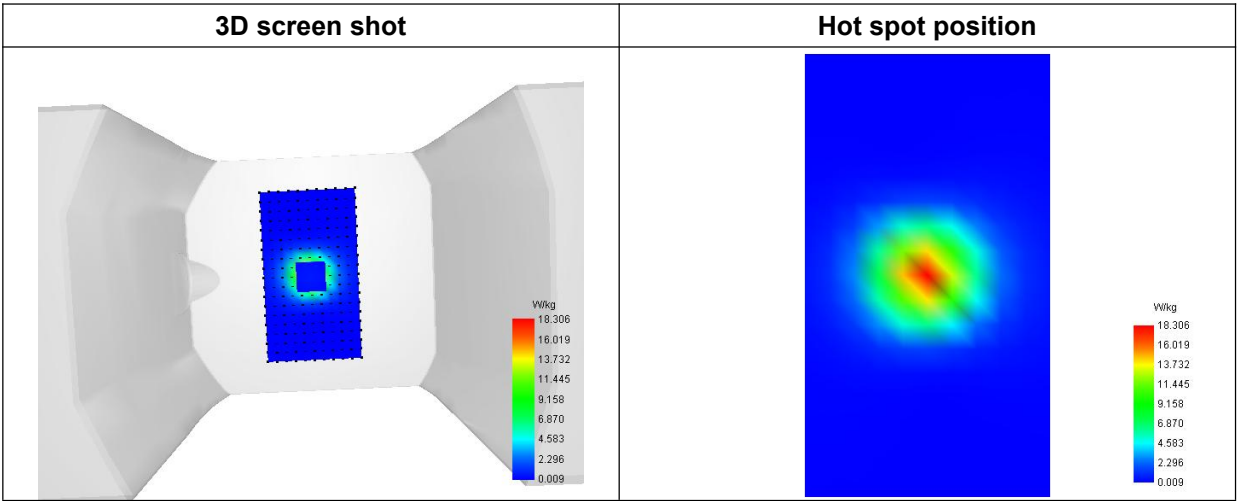

MEASUREMENT 8

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-07-31
Measurement duration: 7 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2023-07-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Validation plane
Device Position	Dipole
Band	CW3700
Signal	Duty Cycle 1:1

B. SAR Measurement Results

Frequency (MHz)	3700.000000
Relative Permittivity (real part)	36.922172
Conductivity (S/m)	3.053695
Power Variation (%)	1.225400
Ambient Temperature	23.4
Liquid Temperature	23.4

C. SAR Surface and Volume

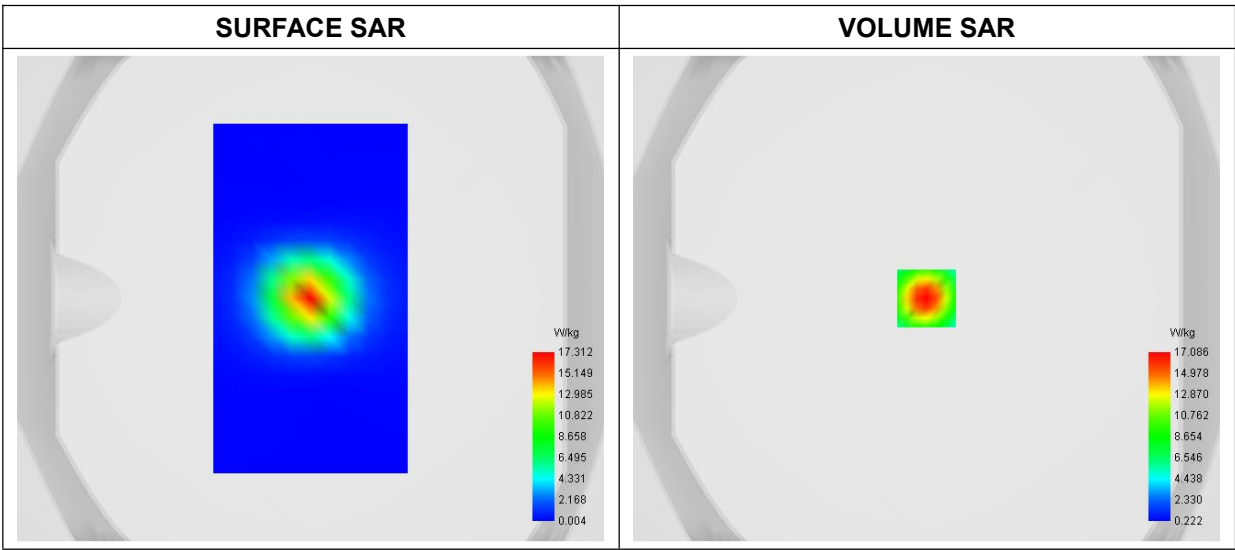


Maximum location: X=0.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	6.422343
SAR 1g (W/Kg)	15.826571

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	37.715	17.085	11.122	7.1110	4.5615	2.9568	1.9461	1.2980	0.8639
	2	5	8						

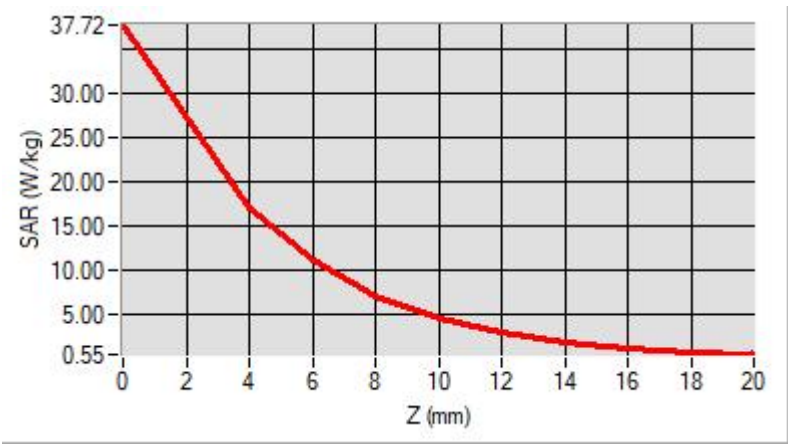

F. 3D Image

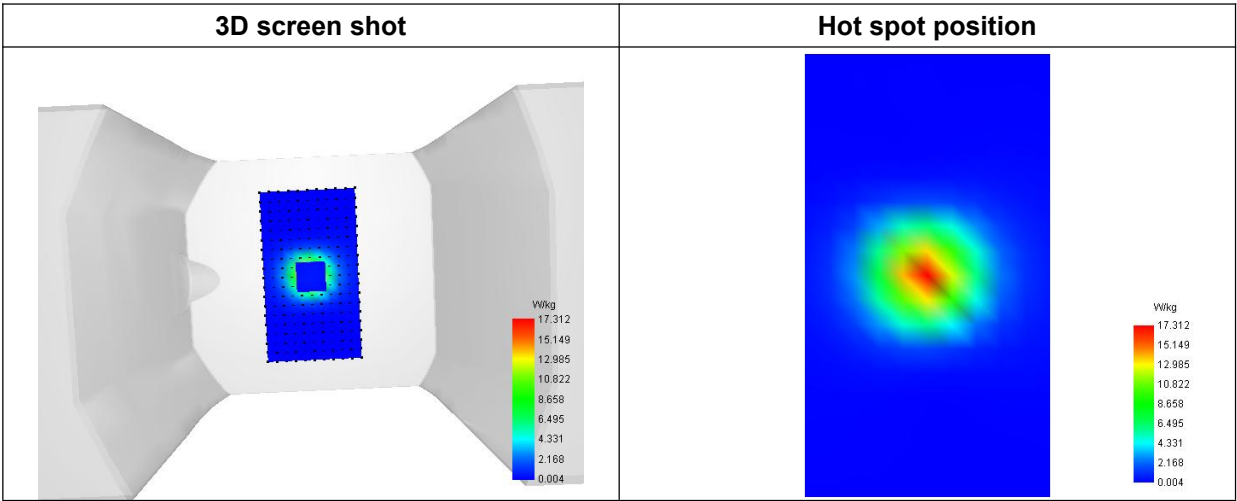

MEASUREMENT 9

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-08-02
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.91; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative Permittivity (real part)	36.931835
Conductivity (S/m)	4.634561
Power Variation (%)	2.345100
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

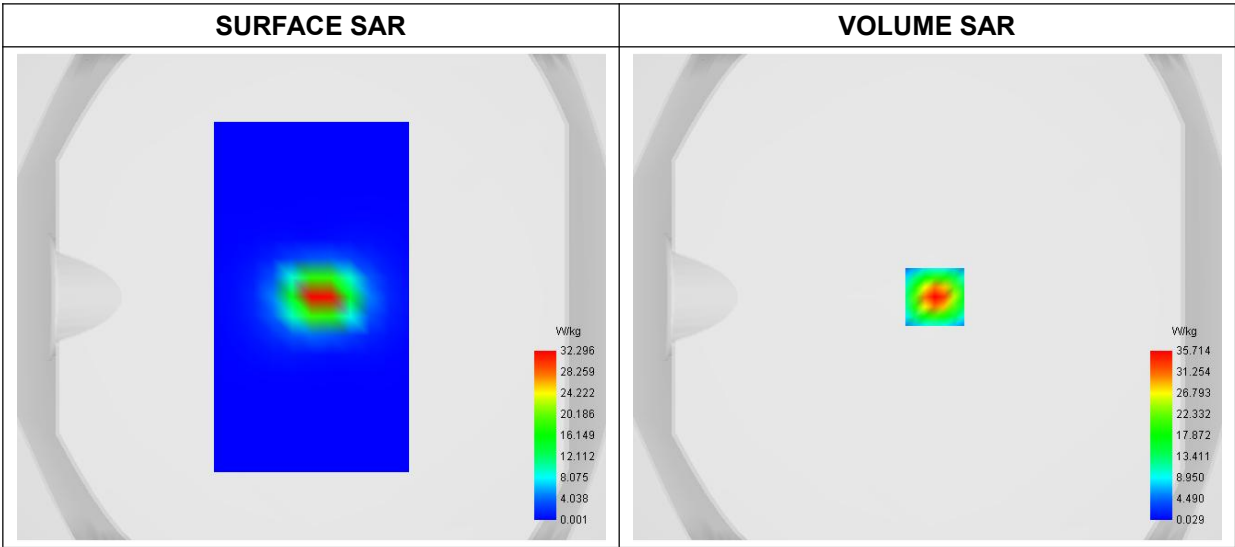


Maximum location: X=3.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.214336
SAR 1g (W/Kg)	18.566732

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	63.6940	35.7143	18.3619	8.6368	3.8326	1.6405	0.7180	0.3557	0.2183

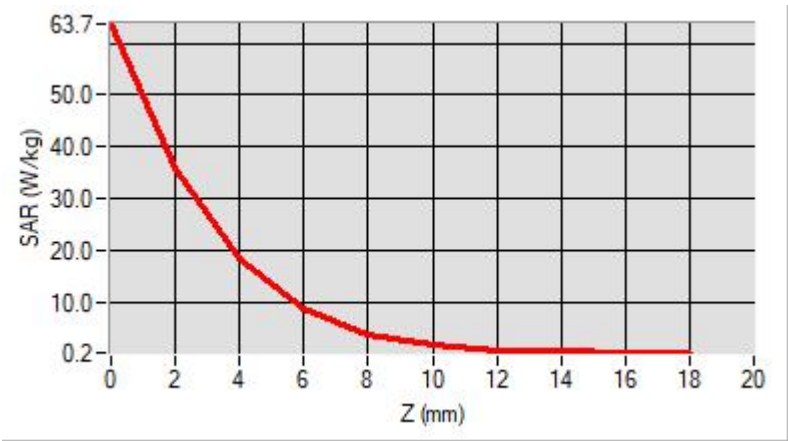

F. 3D Image

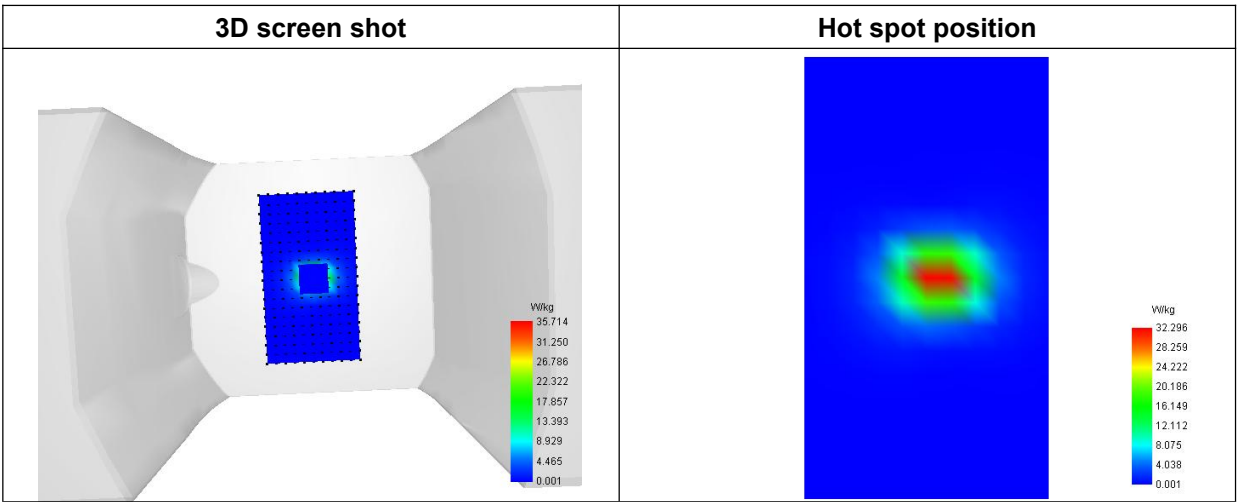

MEASUREMENT 10

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-08-02
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.12; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	5400.000000
Relative Permittivity (real part)	36.311765
Conductivity (S/m)	4.812471
Power Variation (%)	1.374100
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

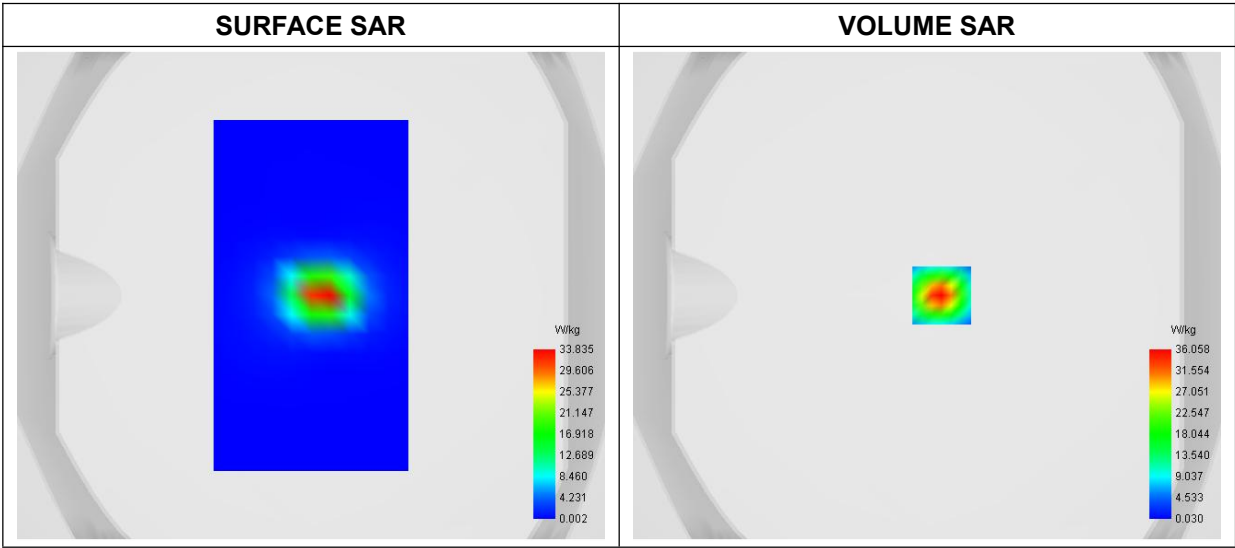


Maximum location: X=6.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	5.463589
SAR 1g (W/Kg)	18.979345

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	62.945	36.057	19.161	9.4529	4.4747	2.0809	0.9976	0.5283	0.3243
	6	9	7						

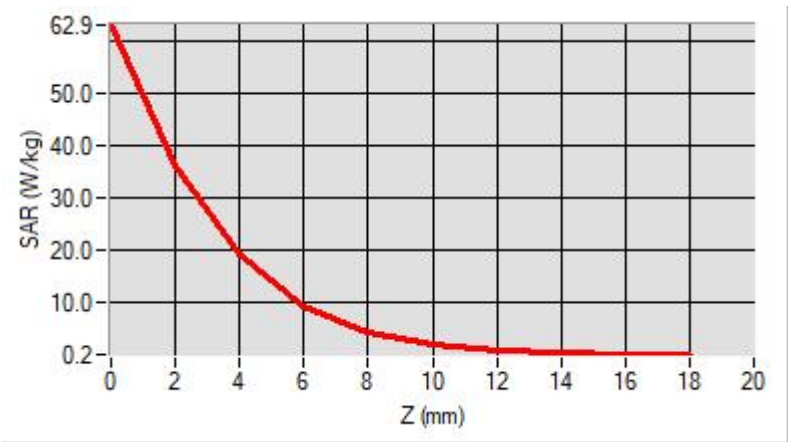

F. 3D Image

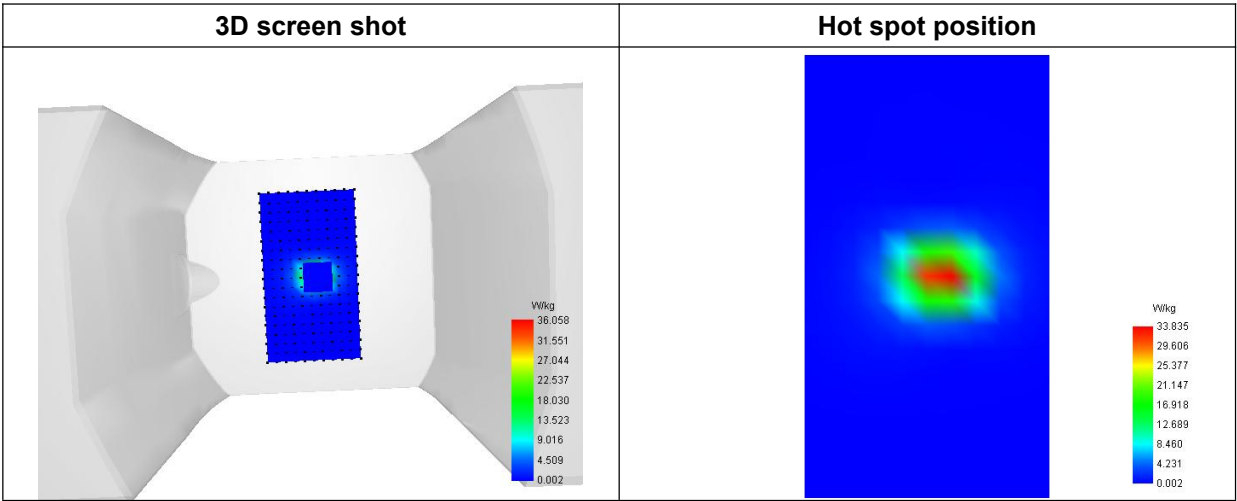

MEASUREMENT 11

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-08-03
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.25; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative Permittivity (real part)	35.884172
Conductivity (S/m)	5.112584
Power Variation (%)	1.475700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

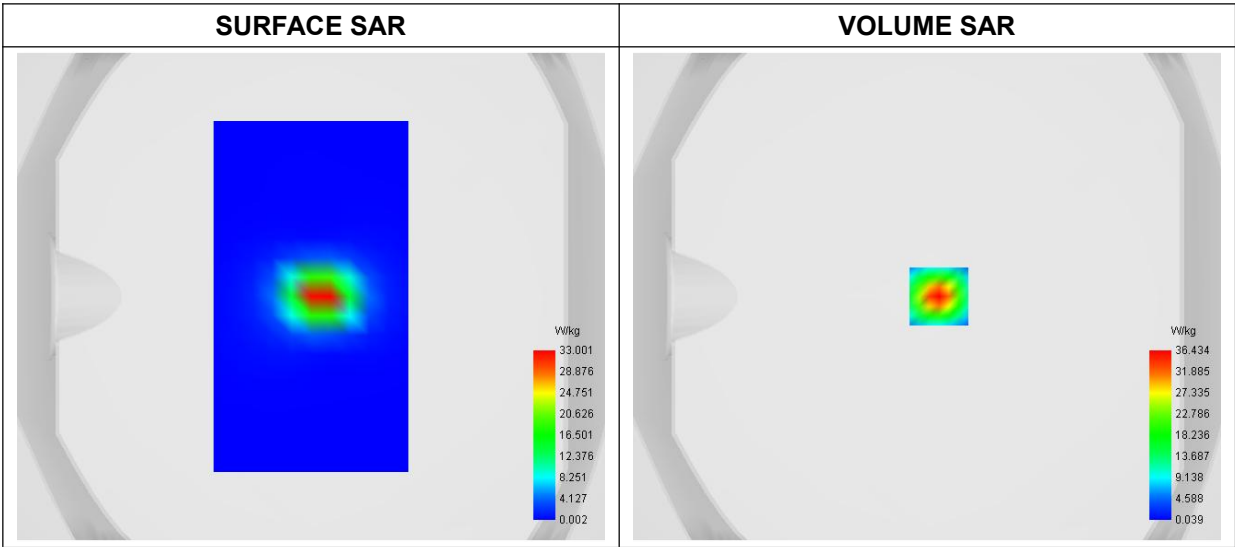


Maximum location: X=5.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.462480
SAR 1g (W/Kg)	19.007904

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	63.633	36.433	19.347	9.5356	4.5091	2.0948	1.0039	0.5323	0.3279
	5	9	5						

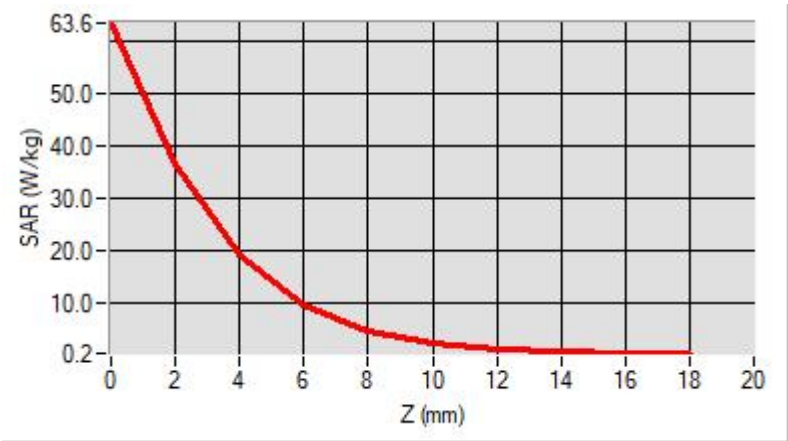

F. 3D Image

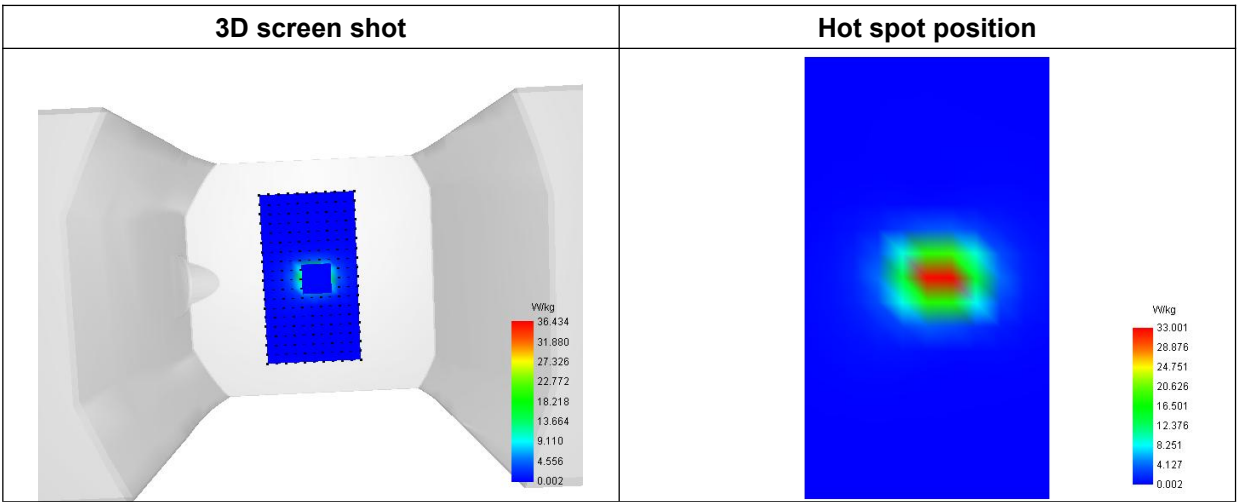

MEASUREMENT 12

Type: Validation measurement (Fast, 75.00 %)
Date of measurement: 2024-08-03
Measurement duration: 12 minutes 21 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.15; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Signal	CW (Crest factor: 1.0)

B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative Permittivity (real part)	35.173471
Conductivity (S/m)	5.322958
Power Variation (%)	-1.437500
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

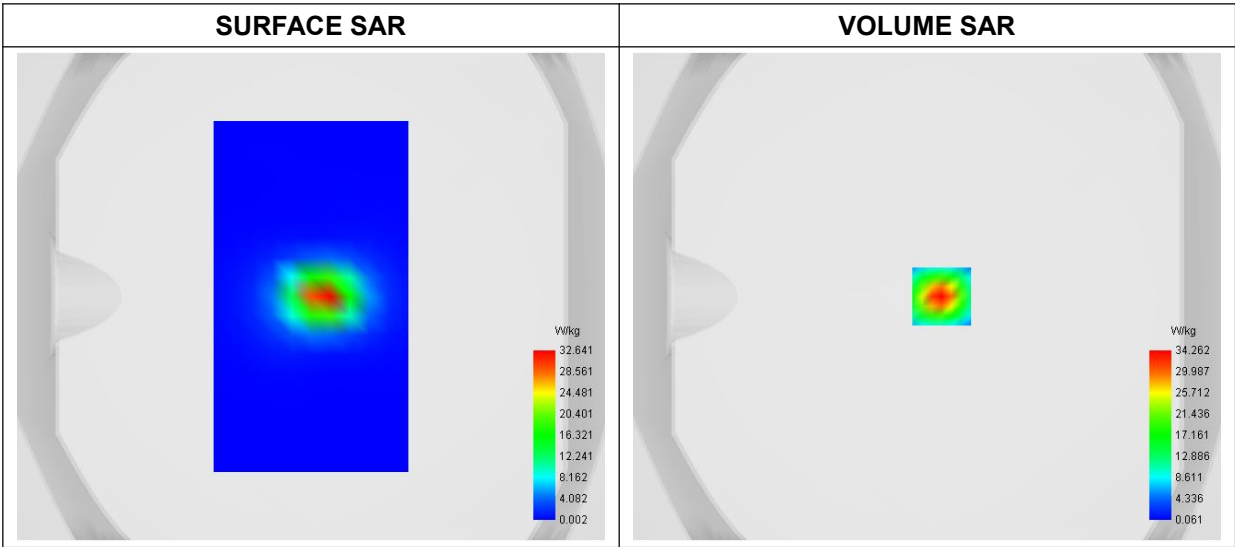

Maximum location: X=6.00, Y=0.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	5.385932
SAR 1g (W/Kg)	18.087402

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	59.320	34.261	18.434	9.2545	4.4822	2.1439	1.0586	0.5728	0.3524
	3	7	7						



F. 3D Image

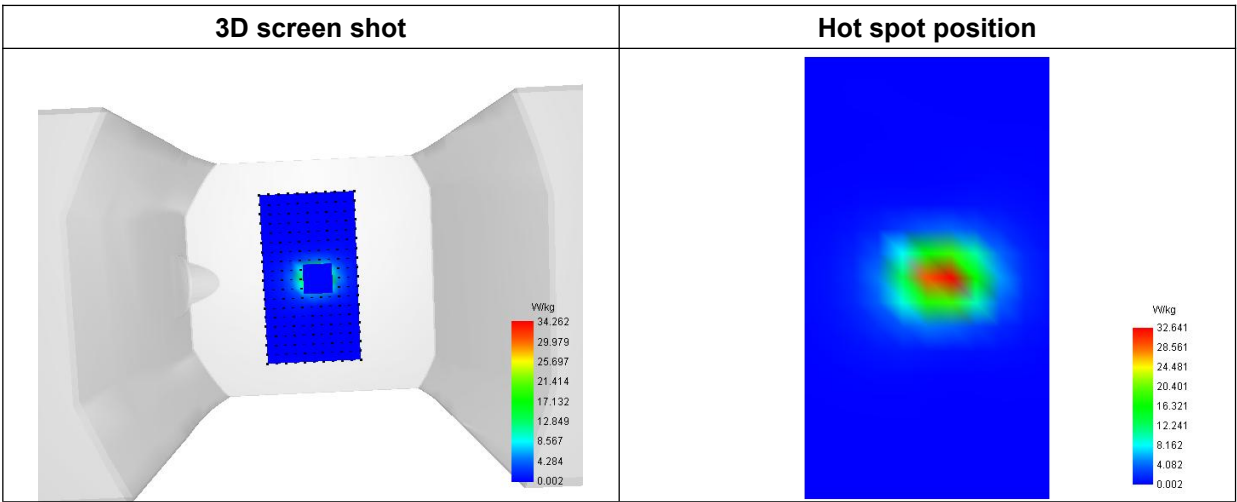

Annex B. Plots of SAR Measurement

MEASUREMENT 1

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	42.314485
Conductivity (S/m)	0.864623
Power Variation (%)	-0.472700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

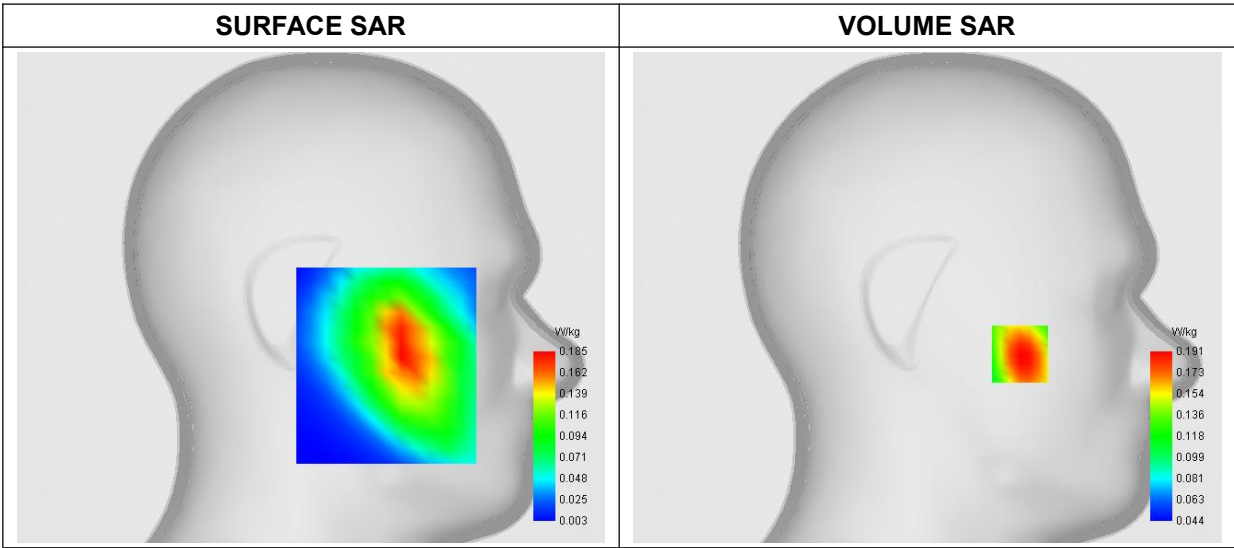


Maximum location: X=-49.00, Y=-30.00
D. SAR 1g & 10g



SAR 10g (W/Kg)	0.130434
SAR 1g (W/Kg)	0.183343

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2487	0.1912	0.1491	0.1195	0.0990

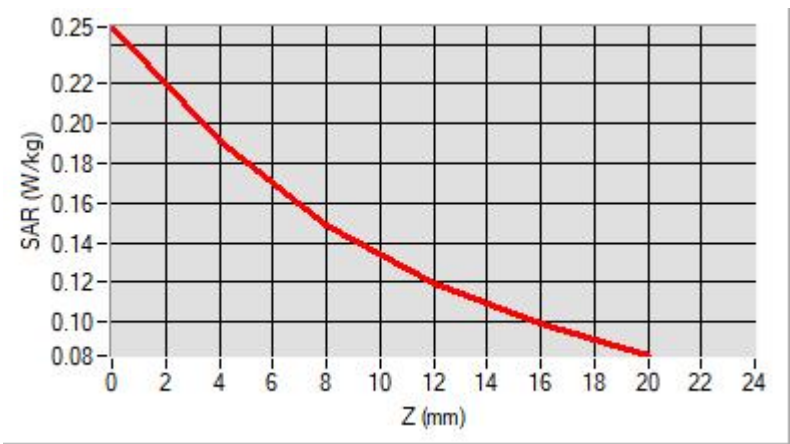

F. 3D Image

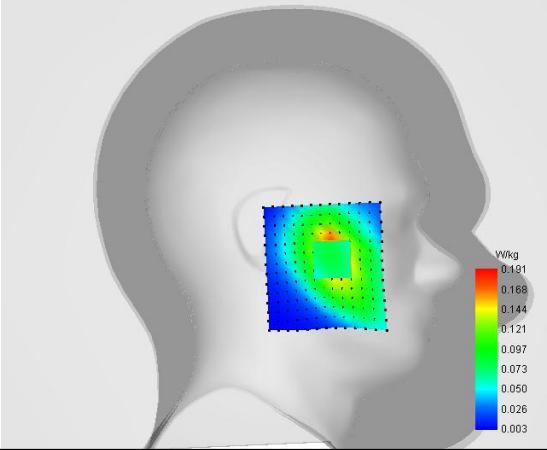3D screen shot	Hot spot position
	

MEASUREMENT 2

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	GPRS850_2TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	42.314485
Conductivity (S/m)	0.864623
Power Variation (%)	1.427100
Ambient Temperature	42.314485
Liquid Temperature	0.864623

C. SAR Surface and Volume

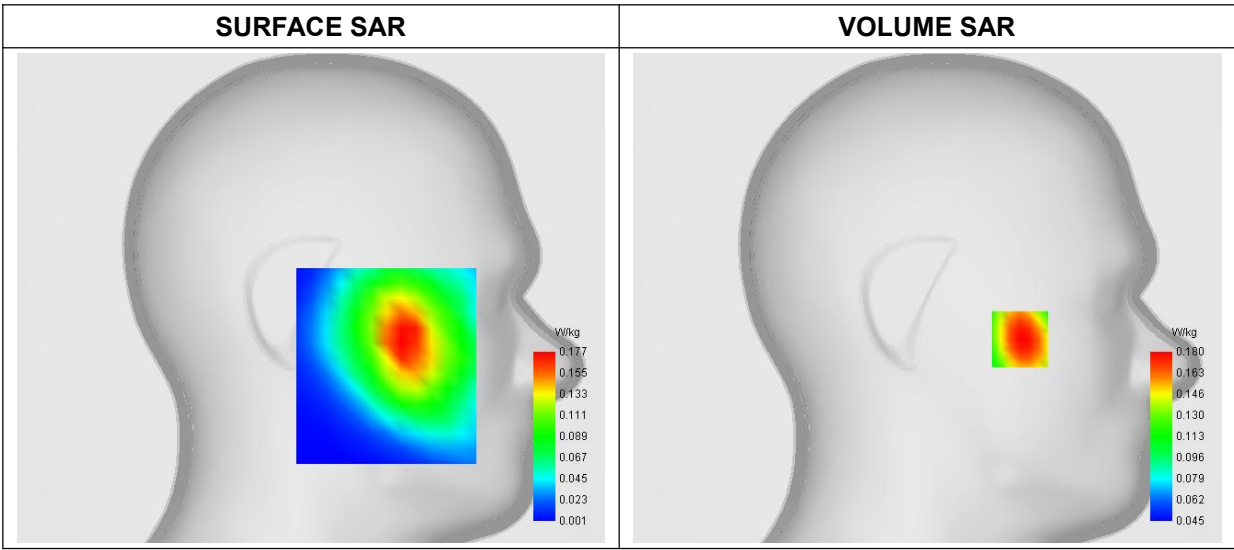


Maximum location: X=-49.00, Y=-22.00

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.124951
SAR 1g (W/Kg)	0.172762

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2253	0.1803	0.1453	0.1188	0.0986

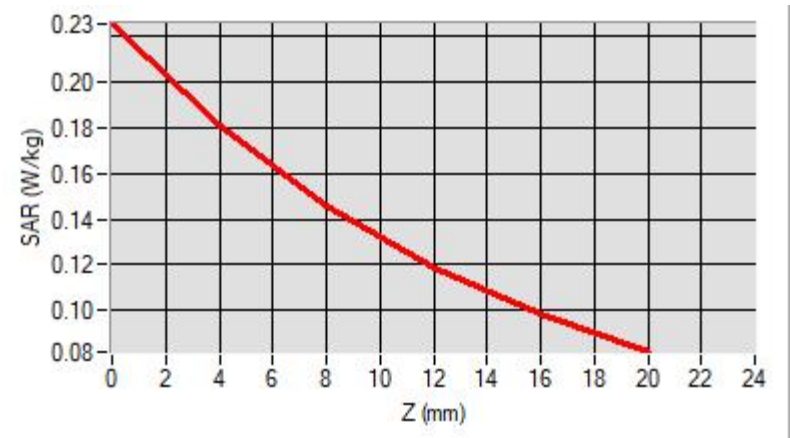

F. 3D Image

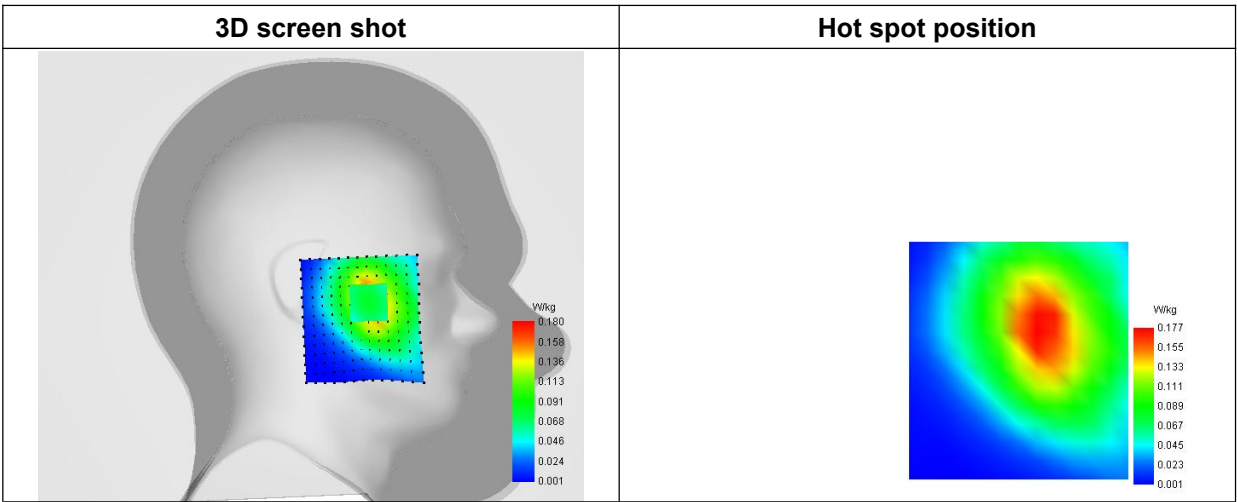

MEASUREMENT 3

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative permittivity (real part)	39.282174
Conductivity (S/m)	1.373826
Power Variation (%)	1.661700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

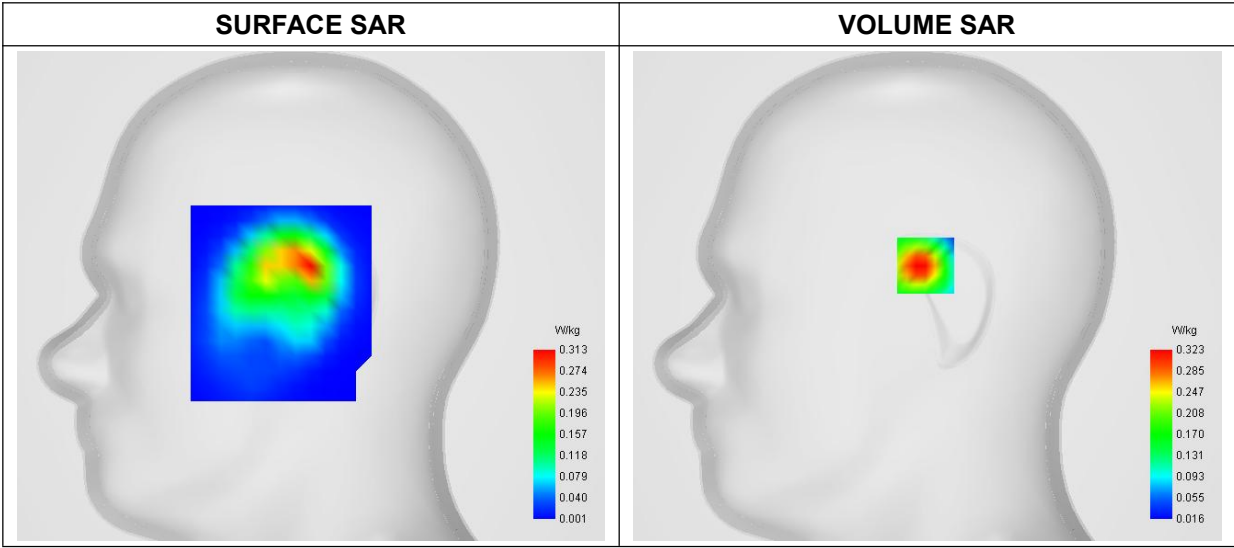


Maximum location: X=-1.00, Y=16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.154035
SAR 1g (W/Kg)	0.299127

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.8388	0.3235	0.1642	0.1141	0.0642

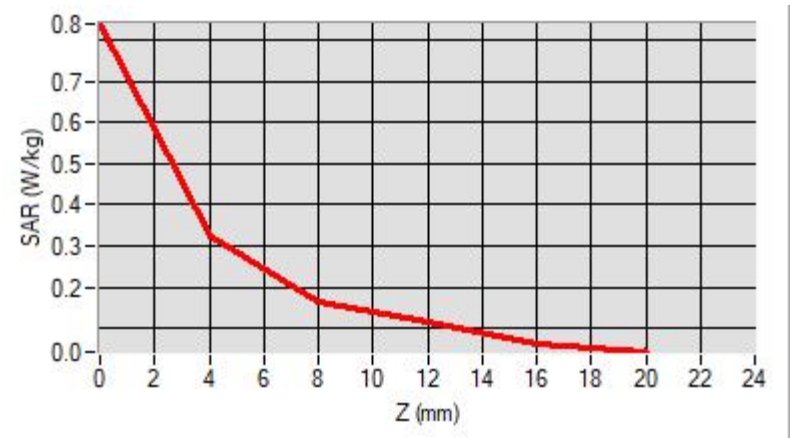

F. 3D Image

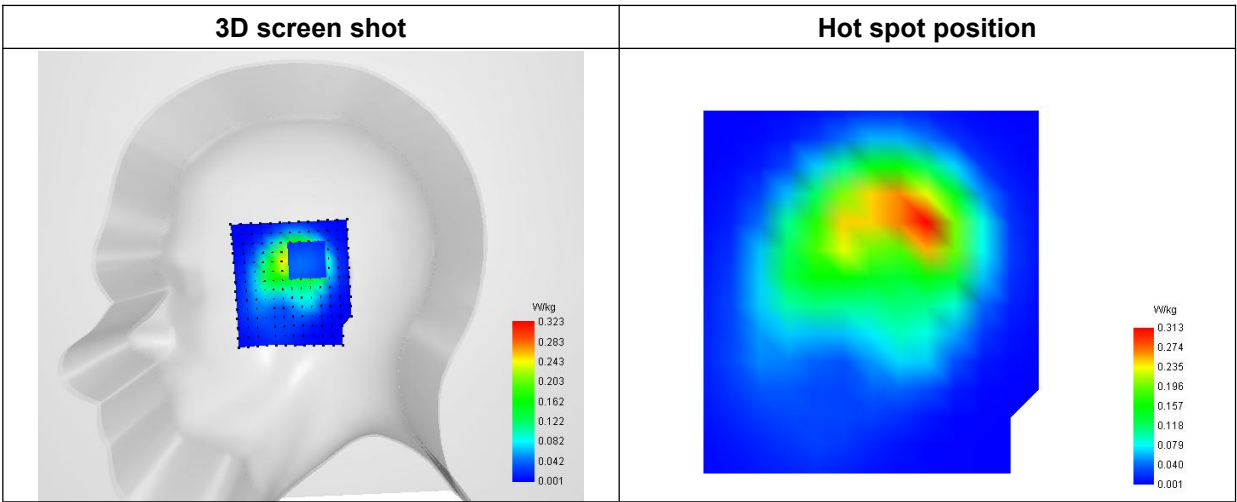

MEASUREMENT 4

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:2

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	39.282174
Conductivity (S/m)	1.373826
Power Variation (%)	-0.477400
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

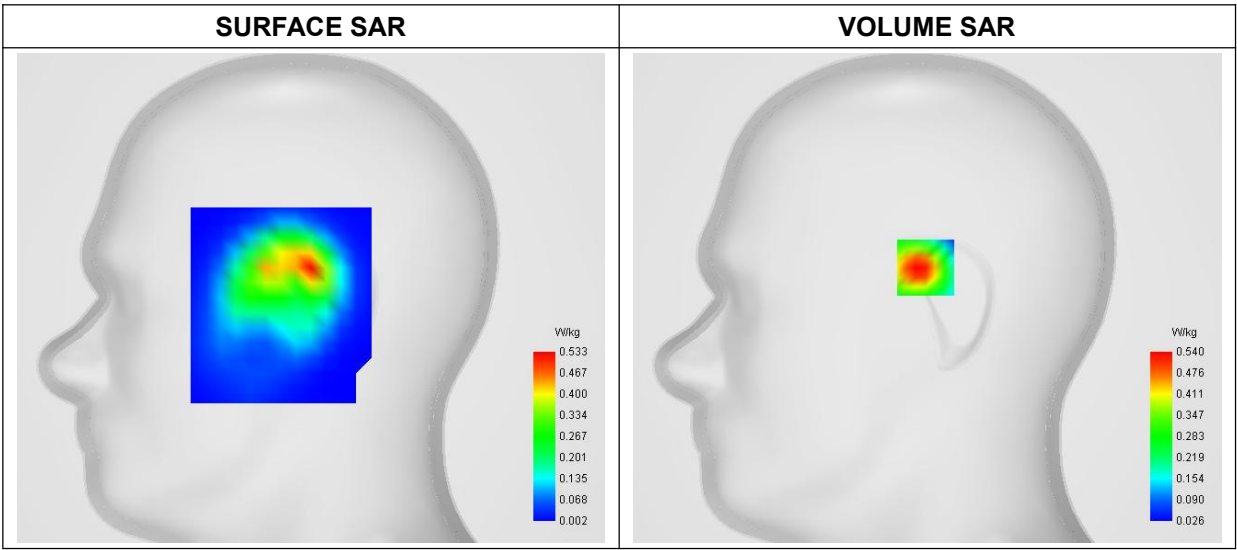


Maximum location: X=-1.00, Y=16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.257832
SAR 1g (W/Kg)	0.496105

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.4283	0.5397	0.2759	0.1958	0.1079

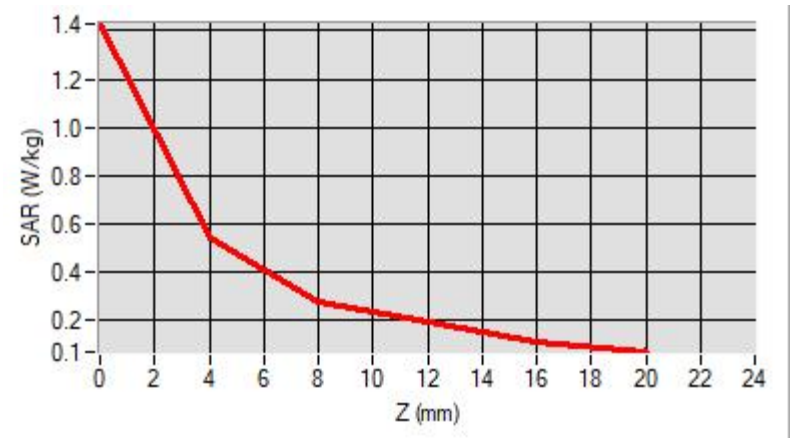

F. 3D Image

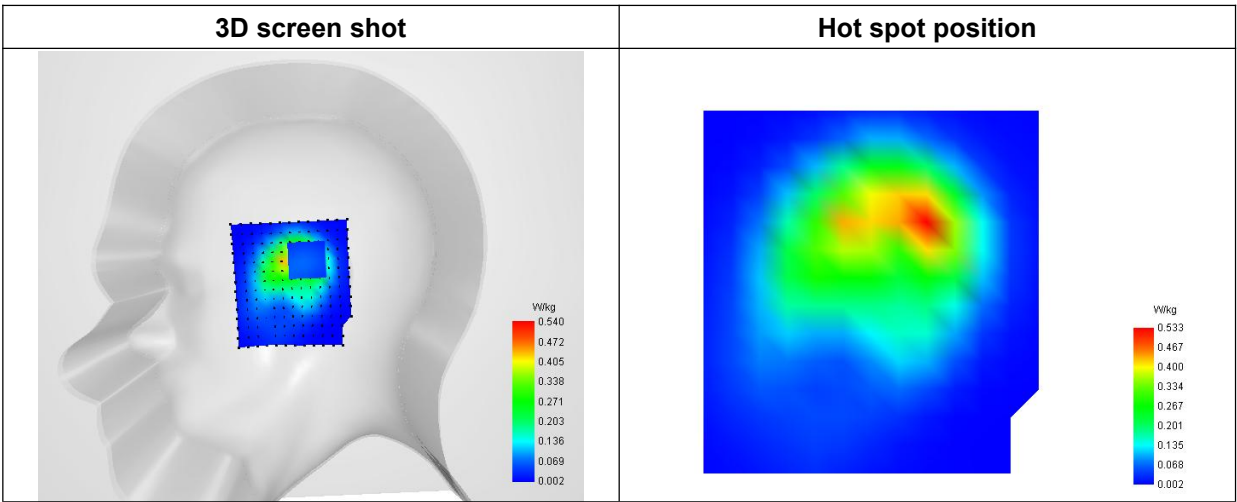

MEASUREMENT 5

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	39.283614
Conductivity (S/m)	1.370620
Power Variation (%)	-0.647100
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

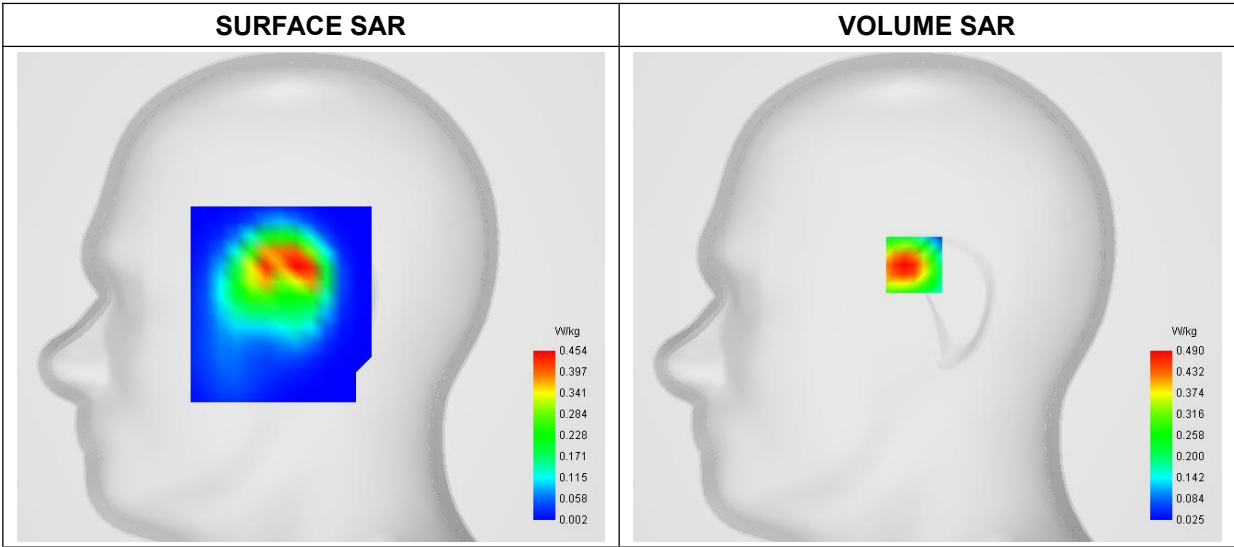


Maximum location: X=-7.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.238058
SAR 1g (W/Kg)	0.453604

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.2250	0.4903	0.2489	0.1693	0.0988

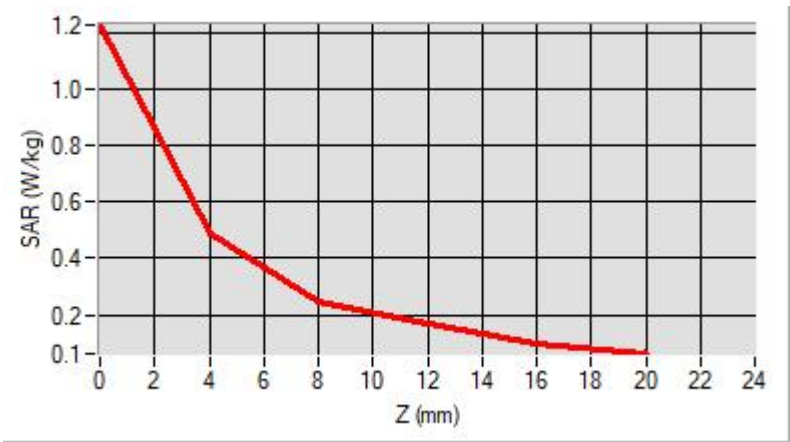

F. 3D Image

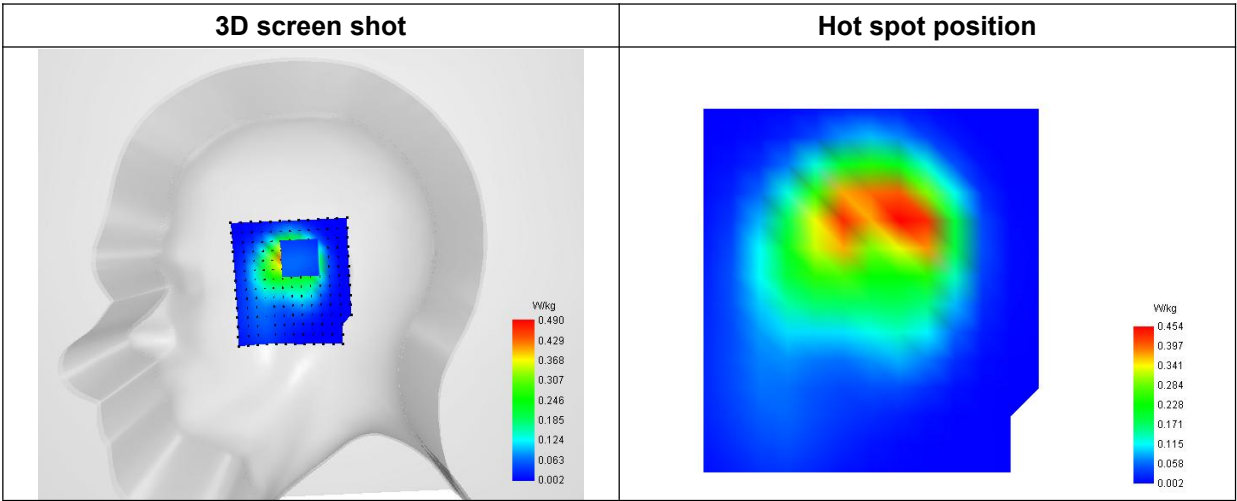

MEASUREMENT 6

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA1700_RMC
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1752.600000
Relative Permittivity (real part)	39.281488
Conductivity (S/m)	1.372012
Power Variation (%)	-1.361400
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

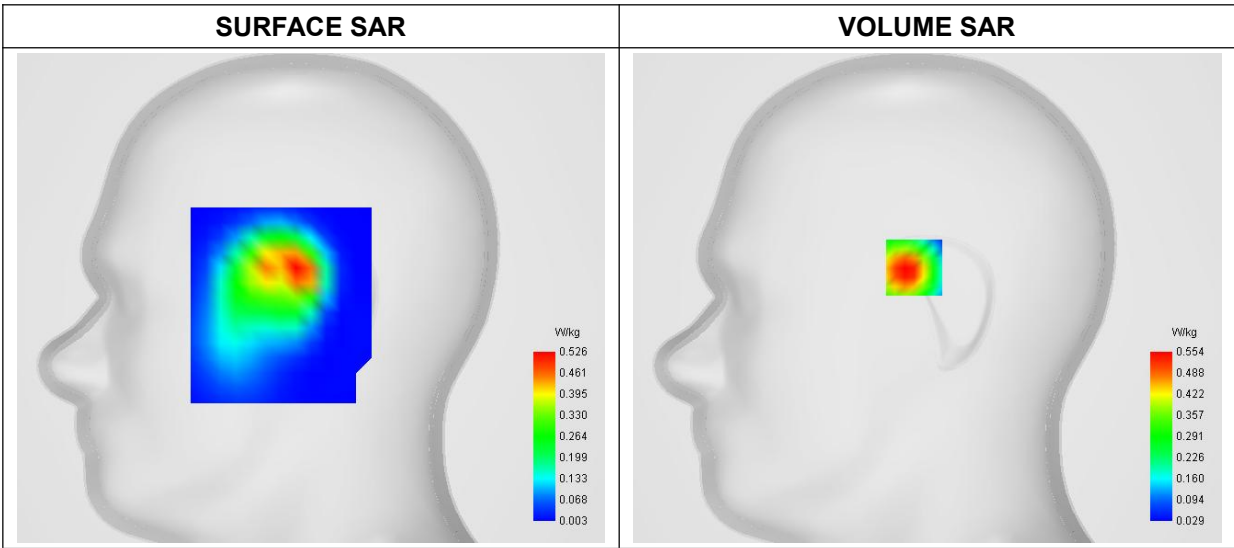


Maximum location: X=-7.00, Y=16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.280497
SAR 1g (W/Kg)	0.515269

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.4598	0.5537	0.2885	0.2122	0.1269

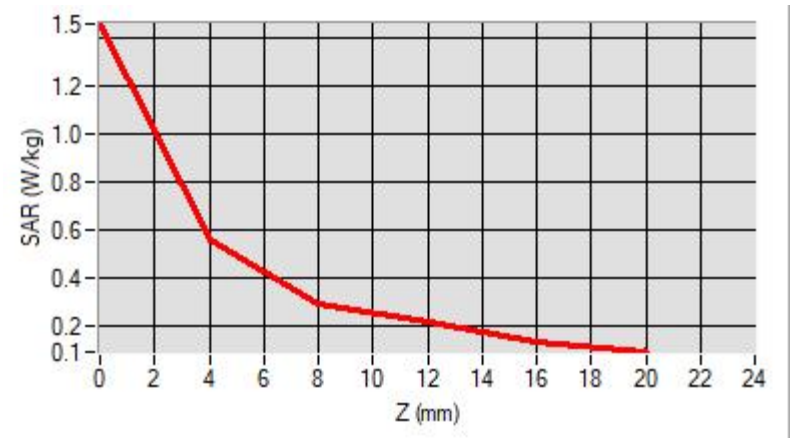

F. 3D Image

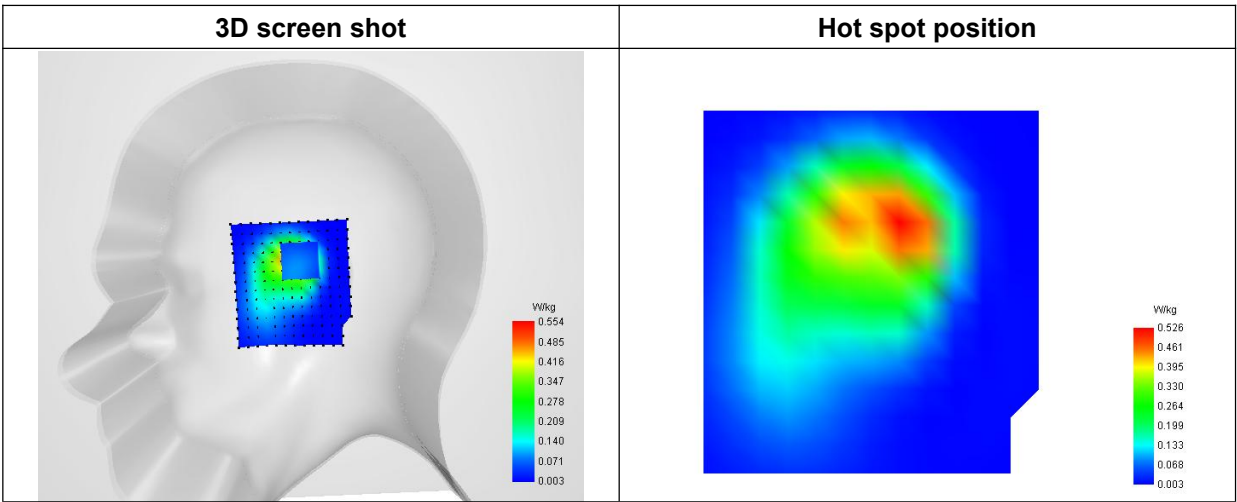

MEASUREMENT 7

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.313176
Conductivity (S/m)	0.862071
Power Variation (%)	-1.201400
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

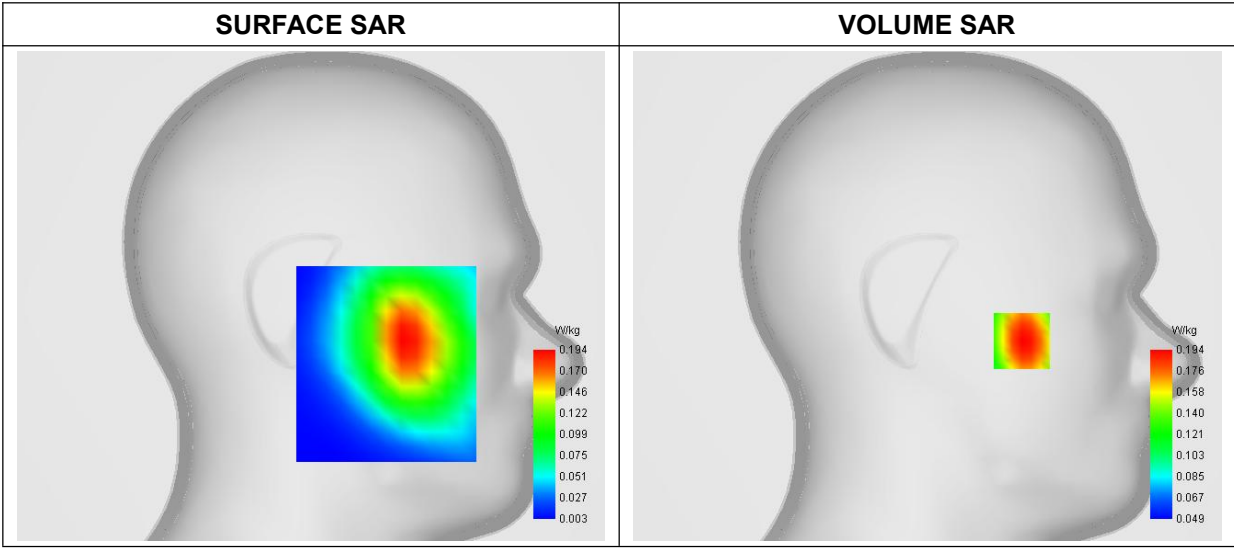


Maximum location: X=-50.00, Y=-24.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.136764
SAR 1g (W/Kg)	0.185611

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2346	0.1940	0.1604	0.1330	0.1105

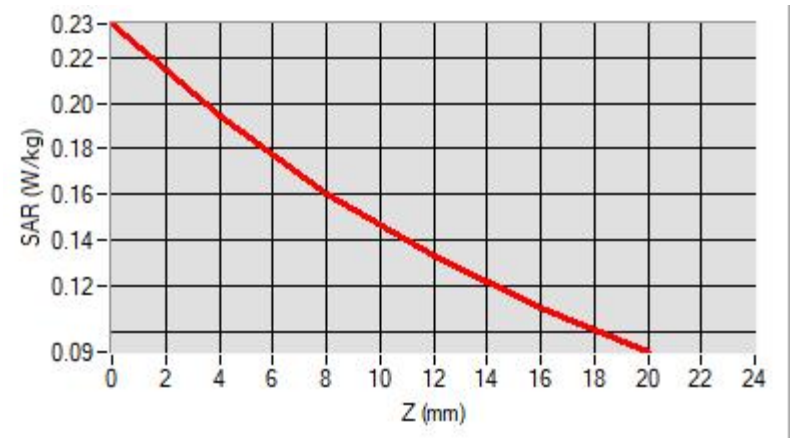

F. 3D Image

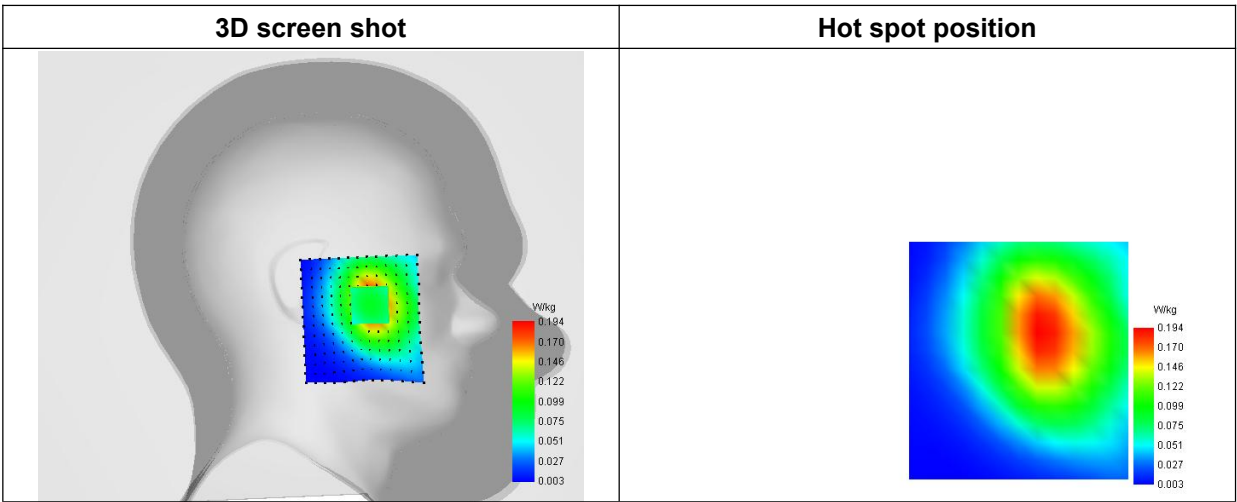

MEASUREMENT 8

Type: Measurement (Complete)
Date of measurement: 2024-07-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.21; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 2_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	41.251874
Conductivity (S/m)	1.392419
Power Variation (%)	-1.291700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

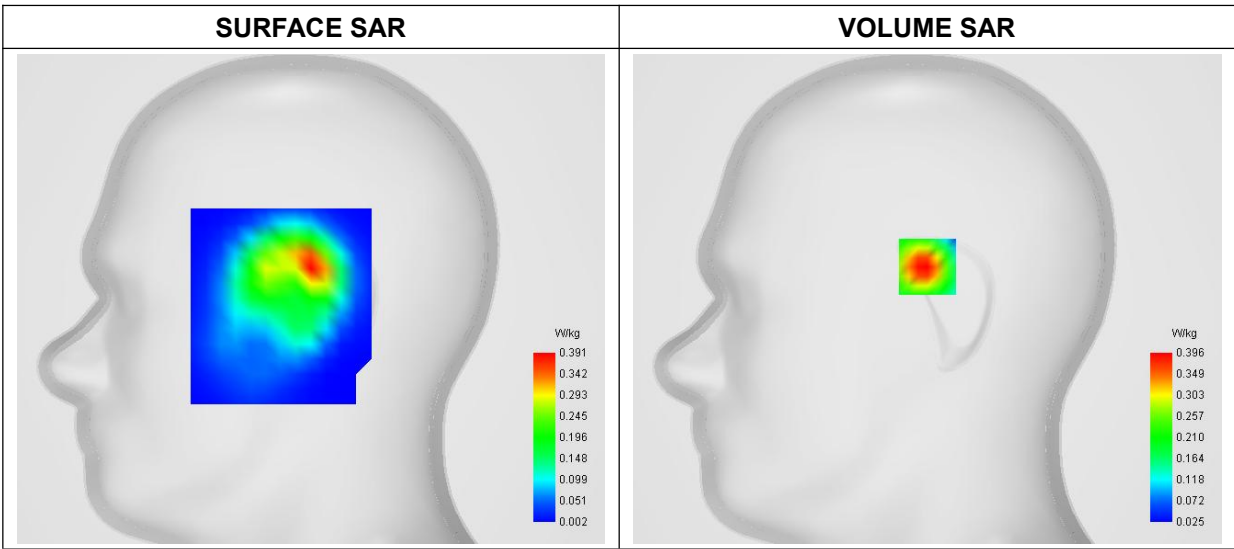


Maximum location: X=0.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.192315
SAR 1g (W/Kg)	0.365795

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6438	0.3956	0.2387	0.1452	0.0910

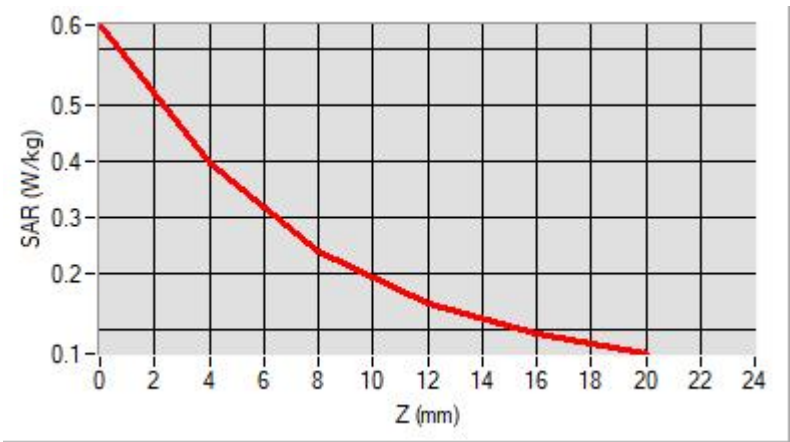

F. 3D Image

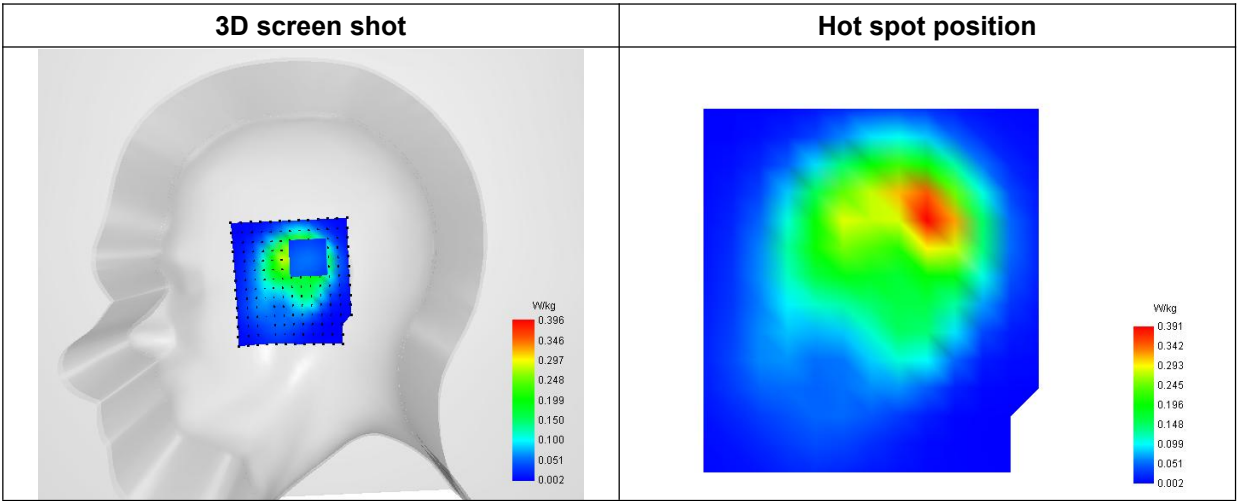

MEASUREMENT 9

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 4_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.281207
Conductivity (S/m)	1.373485
Power Variation (%)	-1.141700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

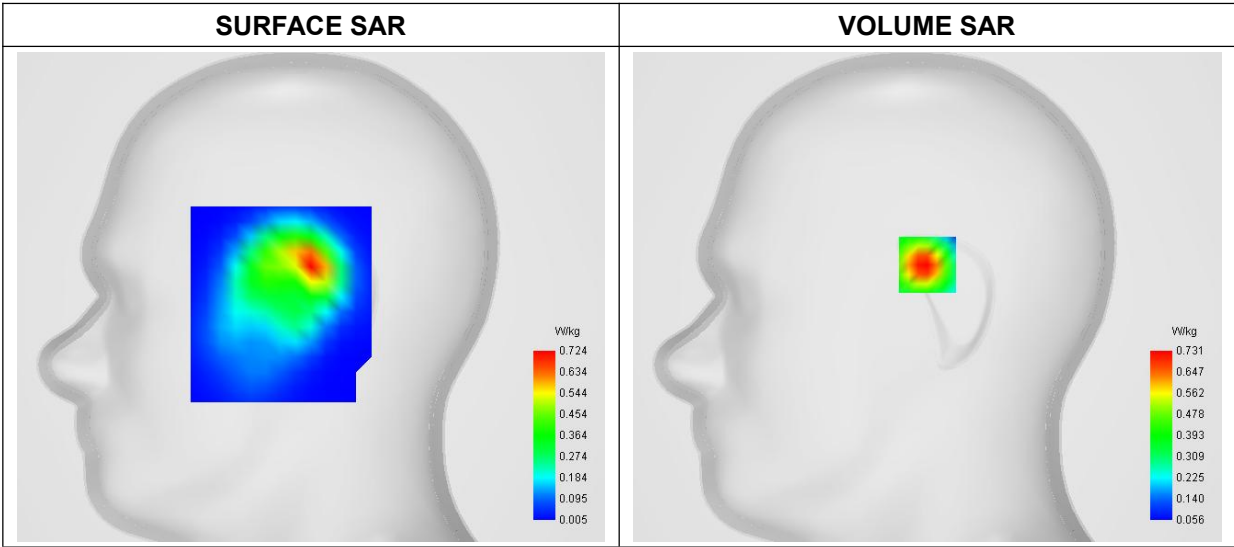


Maximum location: X=0.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.361660
SAR 1g (W/Kg)	0.671956

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.1503	0.7310	0.4593	0.2924	0.1921

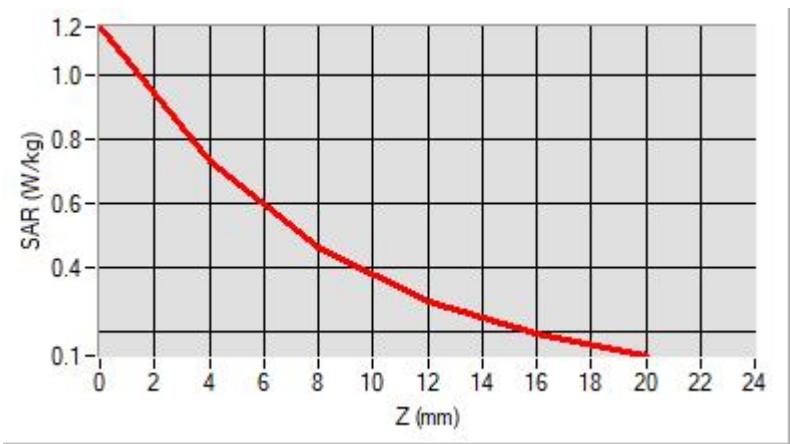

F. 3D Image

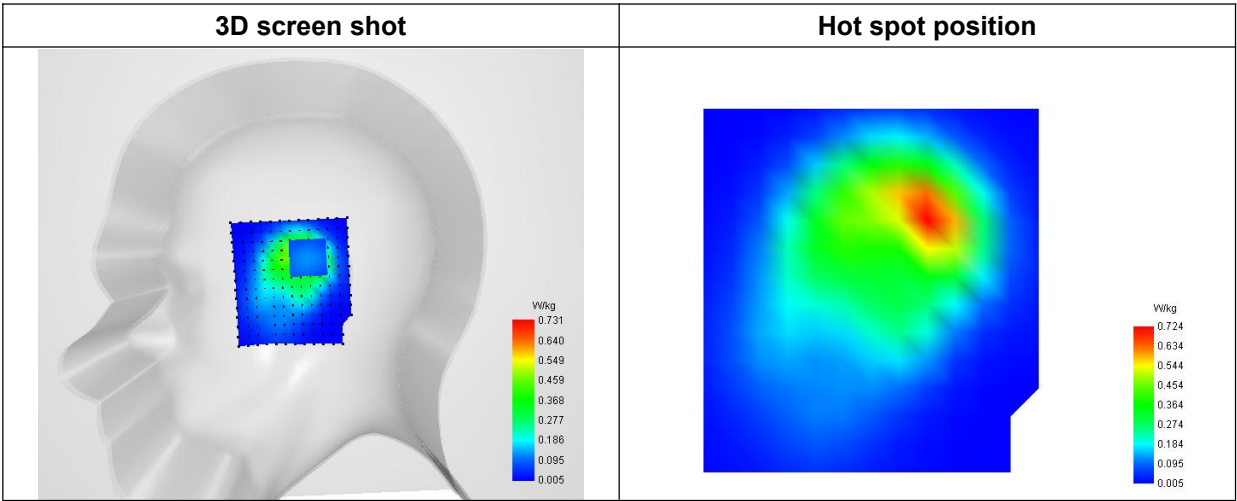

MEASUREMENT 10

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 5_QPSK, 10MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	829.000000
Relative Permittivity (real part)	42.311862
Conductivity (S/m)	0.862012
Power Variation (%)	-0.291700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

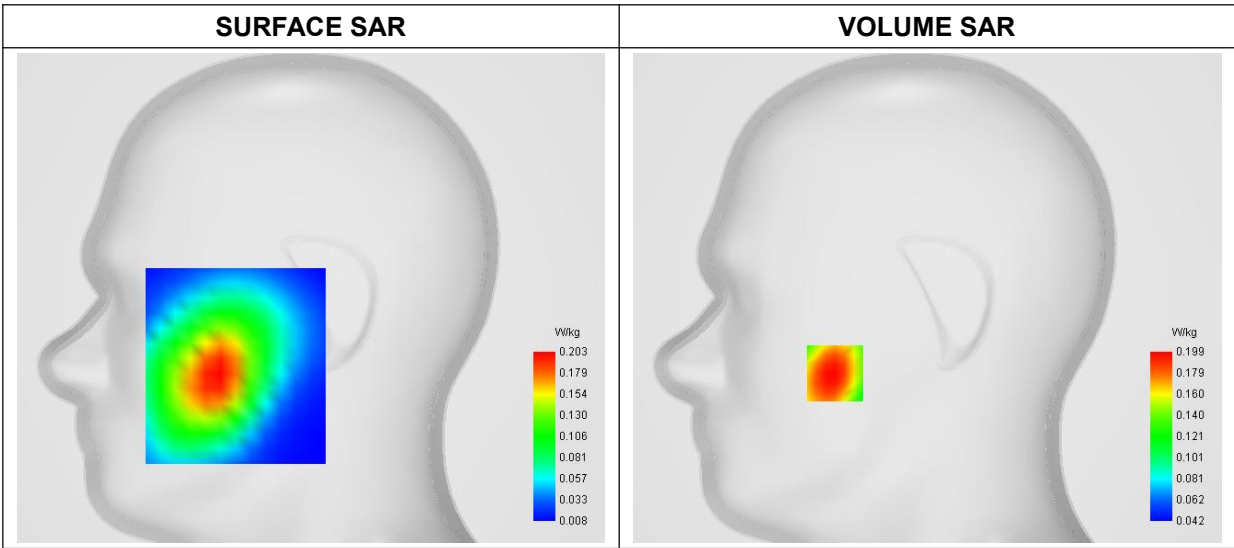


Maximum location: X=-49.00, Y=-40.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.139111
SAR 1g (W/Kg)	0.190503

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2470	0.1991	0.1612	0.1319	0.1090

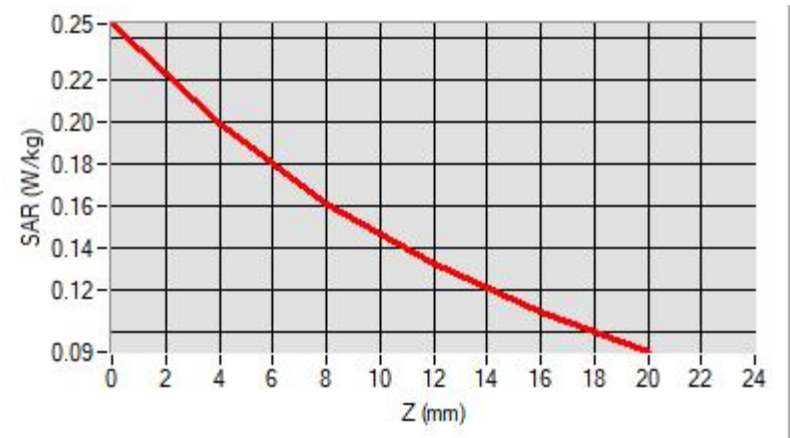

F. 3D Image

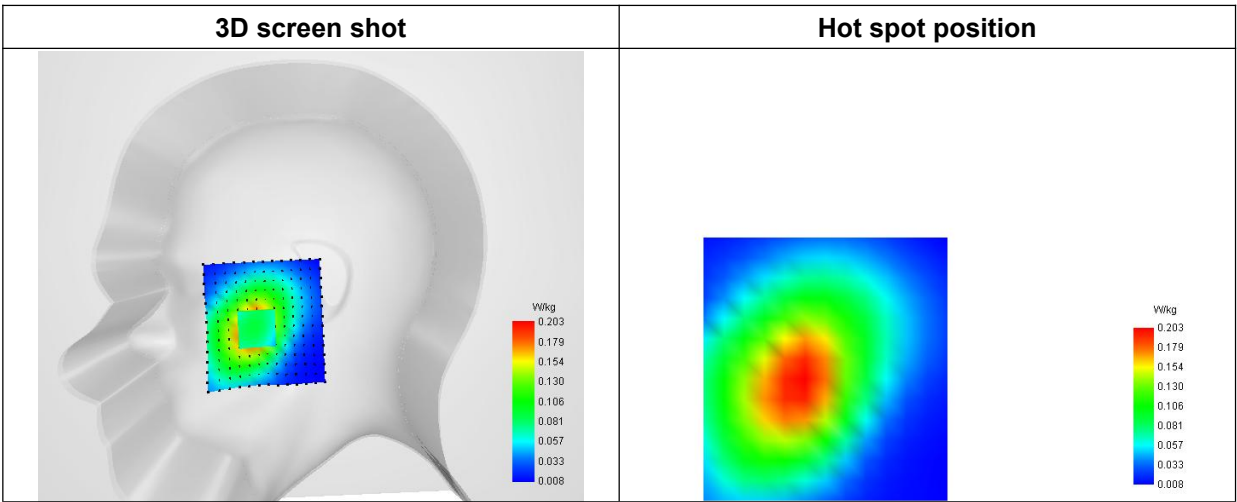

MEASUREMENT 11

Type: Measurement (Complete)
Date of measurement: 2024-07-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.22; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 7_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2510.00000
Relative Permittivity (real part)	38.772353
Conductivity (S/m)	1.924857
Power Variation (%)	-1.091700
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

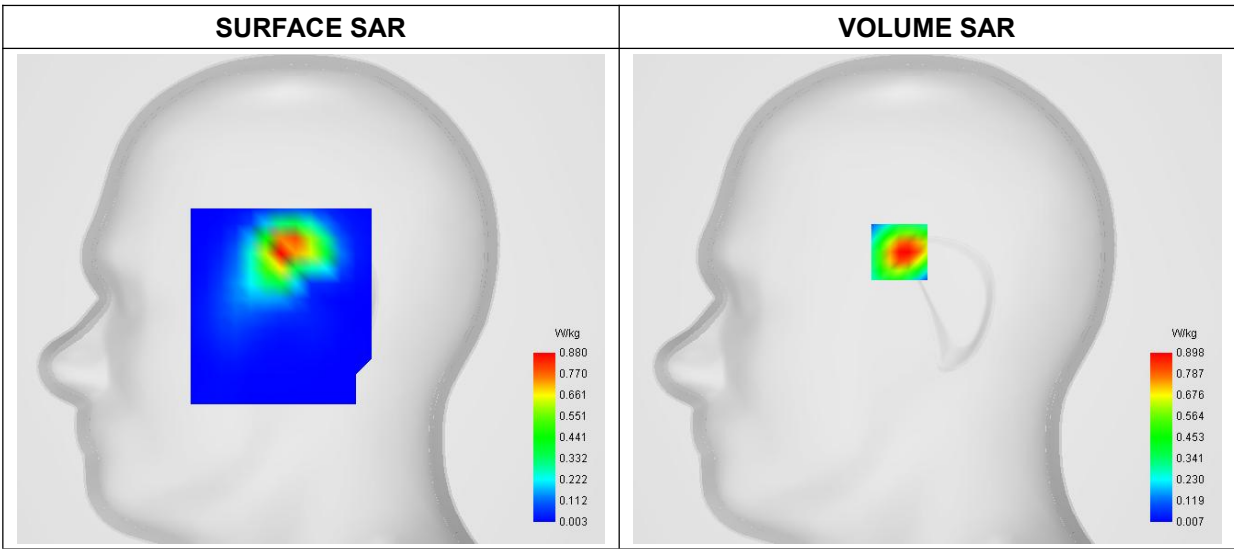


Maximum location: X=-15.00, Y=25.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.379869
SAR 1g (W/Kg)	0.834839

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	2.2592	0.8985	0.3938	0.2215	0.1139

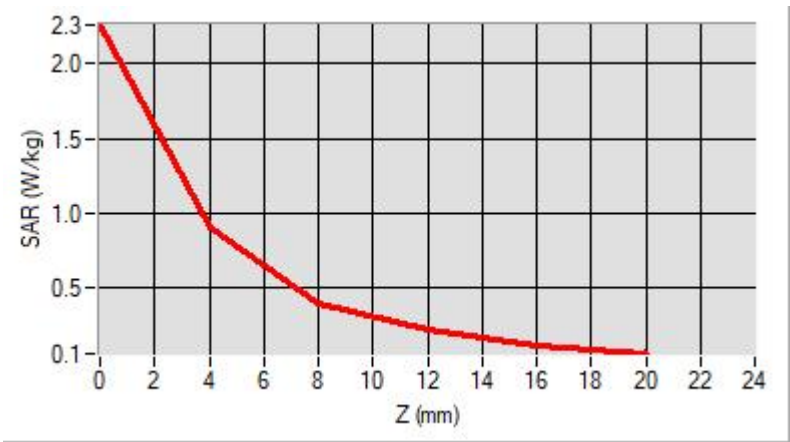

F. 3D Image

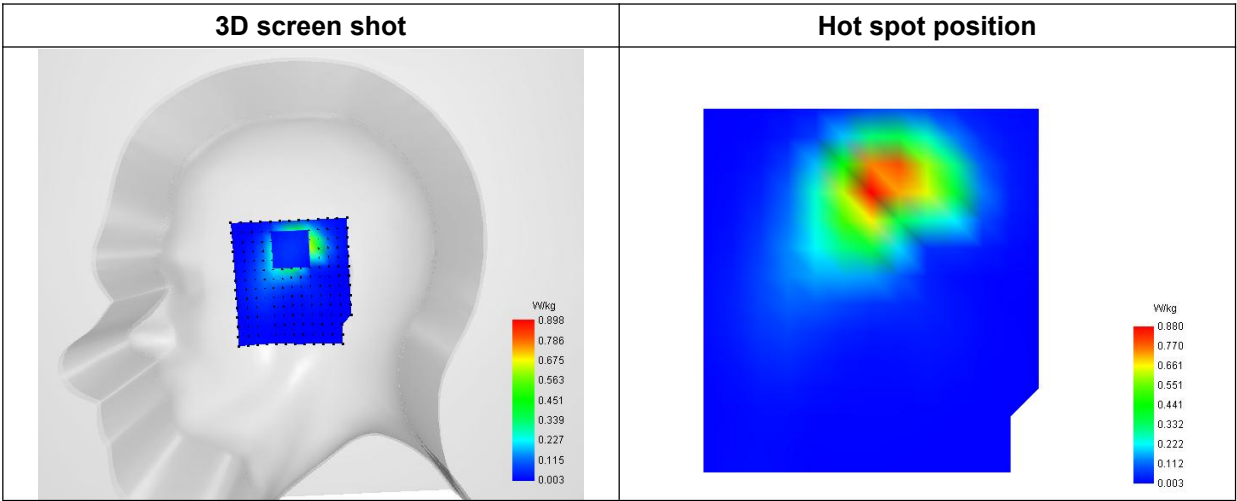

MEASUREMENT 12

Type: Measurement (Complete)
Date of measurement: 2024-07-15
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 12_QPSK, 10MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	704.000000
Relative Permittivity (real part)	42.342353
Conductivity (S/m)	0.854571
Power Variation (%)	-1.097100
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

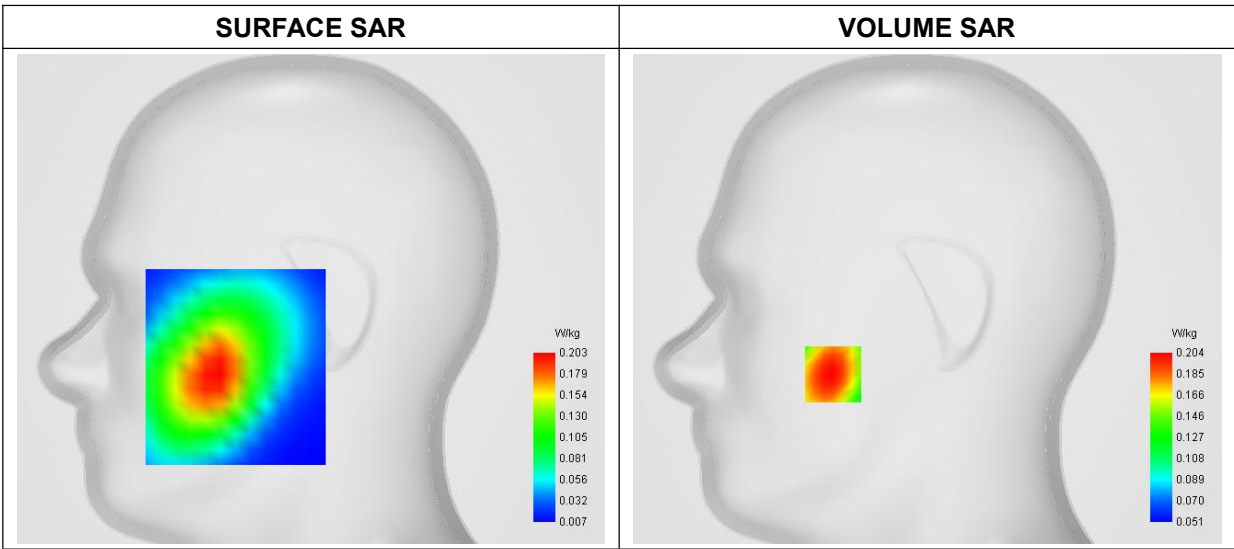


Maximum location: X=-50.00, Y=-40.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.148385
SAR 1g (W/Kg)	0.195440

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2470	0.2036	0.1691	0.1425	0.1217

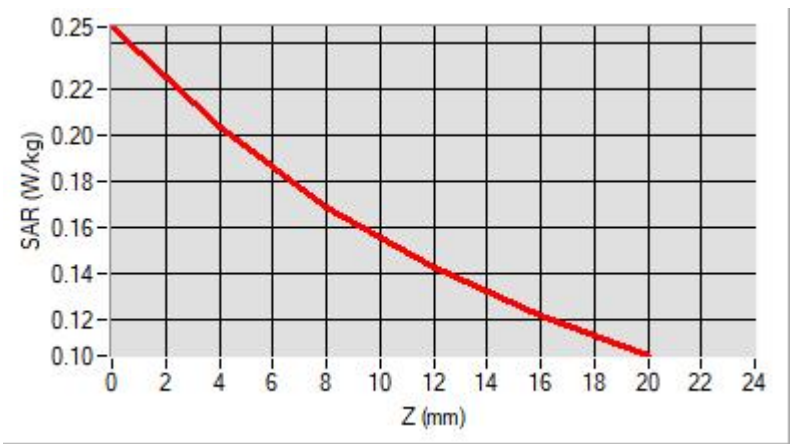

F. 3D Image

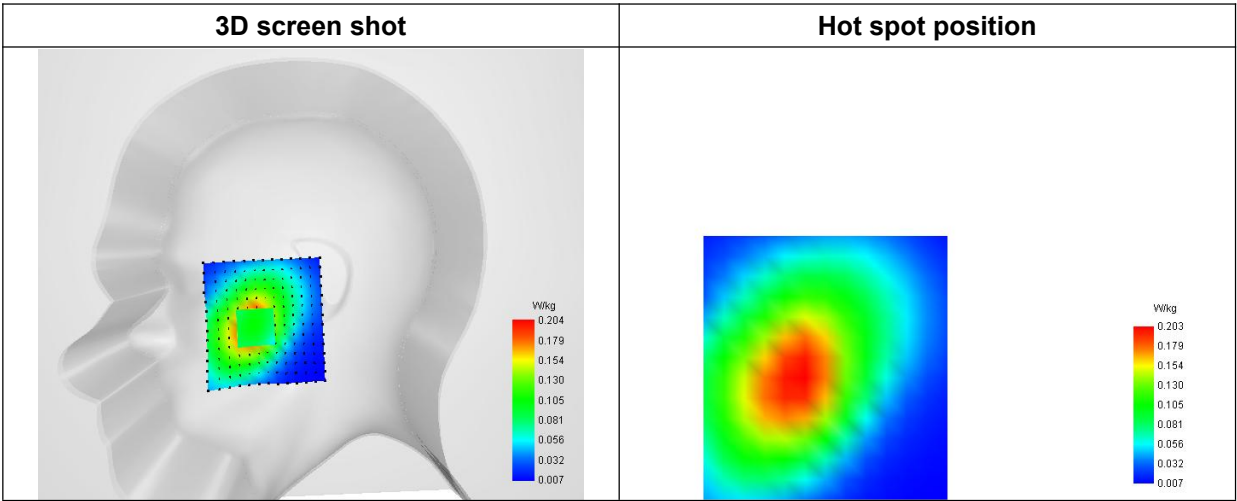

MEASUREMENT 13

Type: Measurement (Complete)
Date of measurement: 2024-07-15
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 13_QPSK, 10MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	42.342178
Conductivity (S/m)	0.850311
Power Variation (%)	-1.341700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

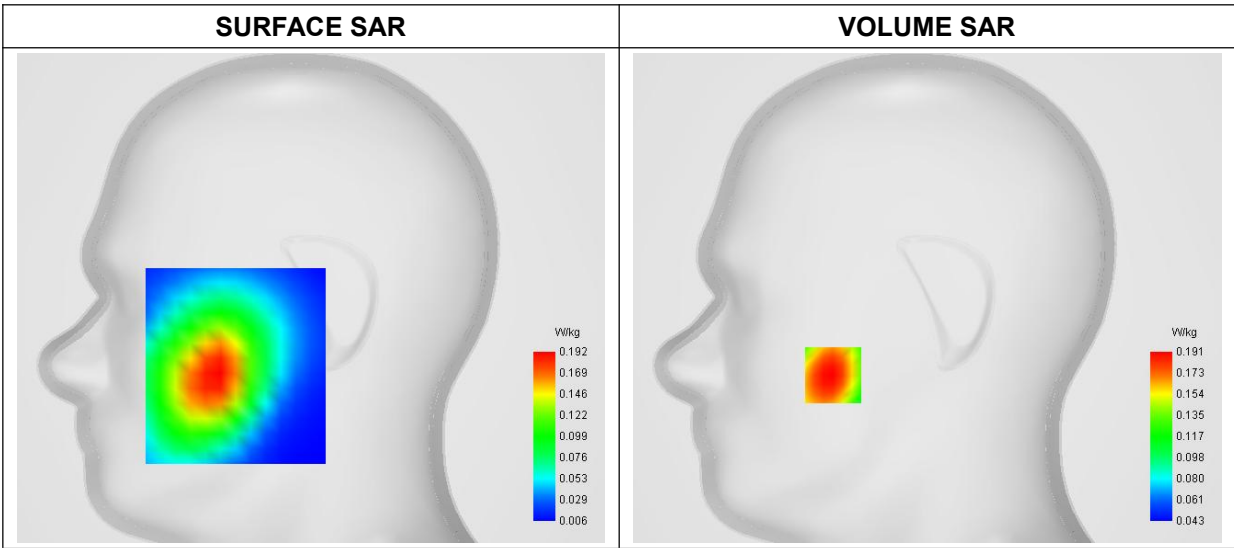


Maximum location: X=-50.00, Y=-41.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.136820
SAR 1g (W/Kg)	0.183402

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2304	0.1911	0.1586	0.1320	0.1101

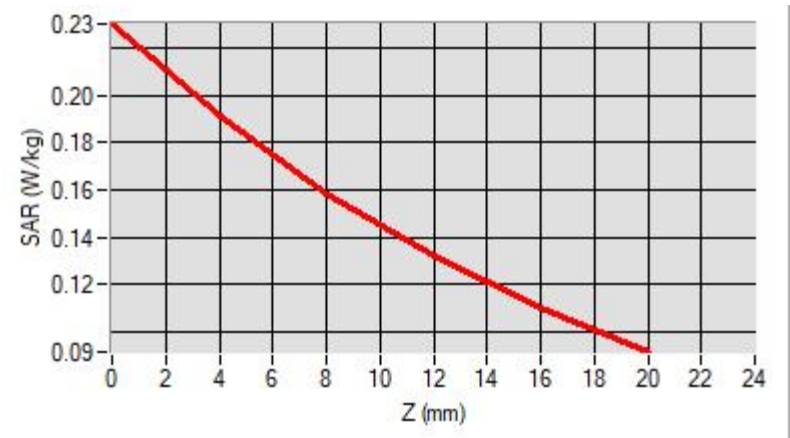

F. 3D Image

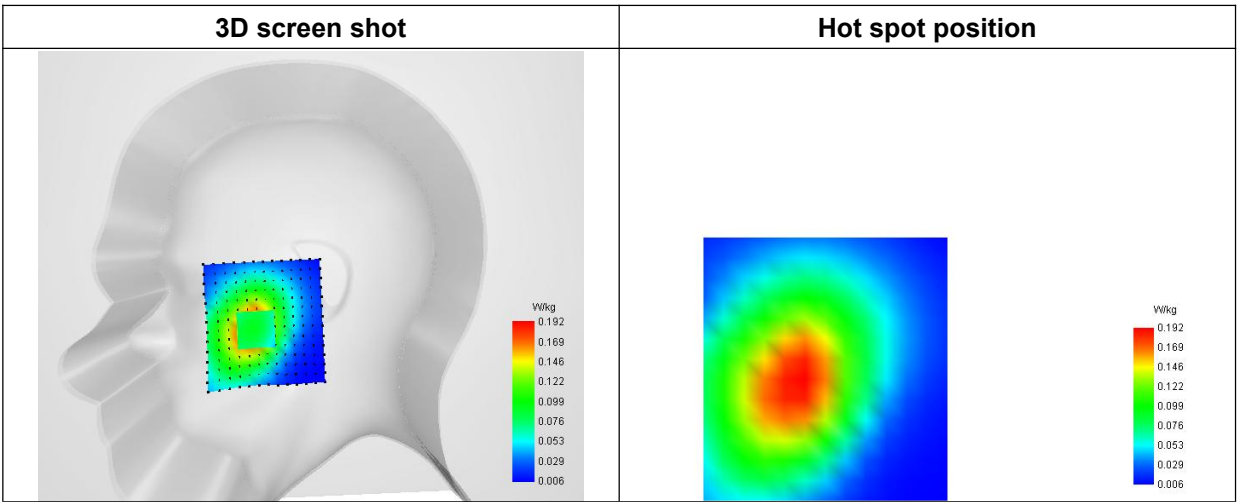

MEASUREMENT 14

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Right head
Device Position	Cheek
Band	FDD-LTE Band 66_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.281207
Conductivity (S/m)	1.373485
Power Variation (%)	-0.811700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

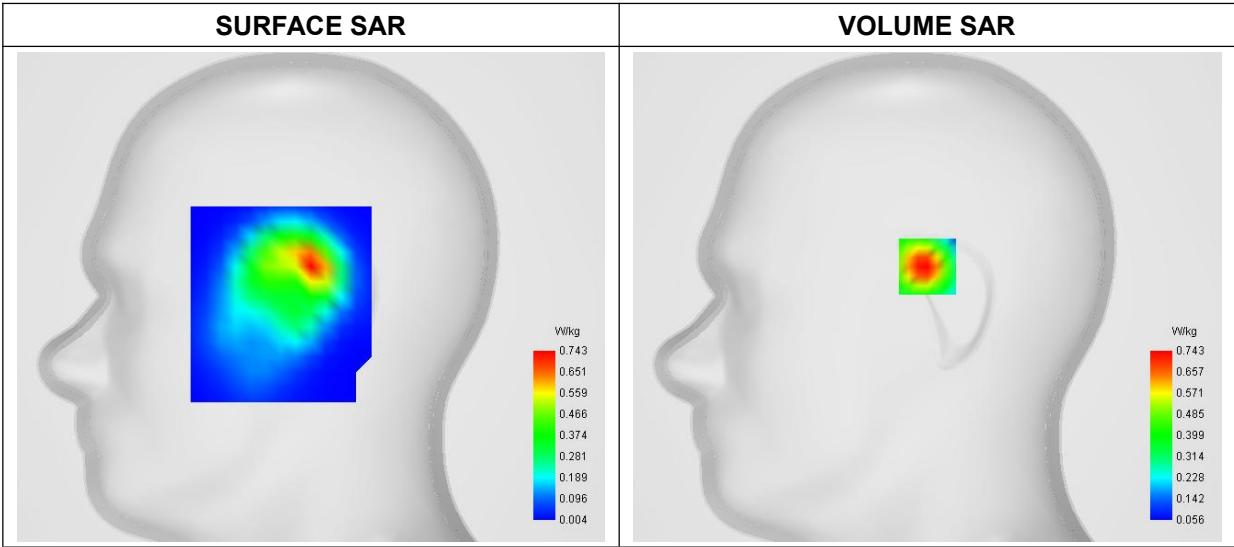


Maximum location: X=0.00, Y=16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.370990
SAR 1g (W/Kg)	0.685192

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	1.1590	0.7426	0.4699	0.3001	0.1964

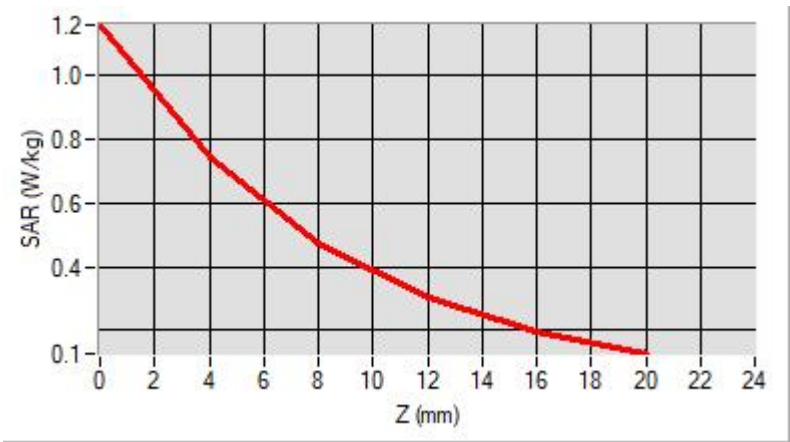

F. 3D Image

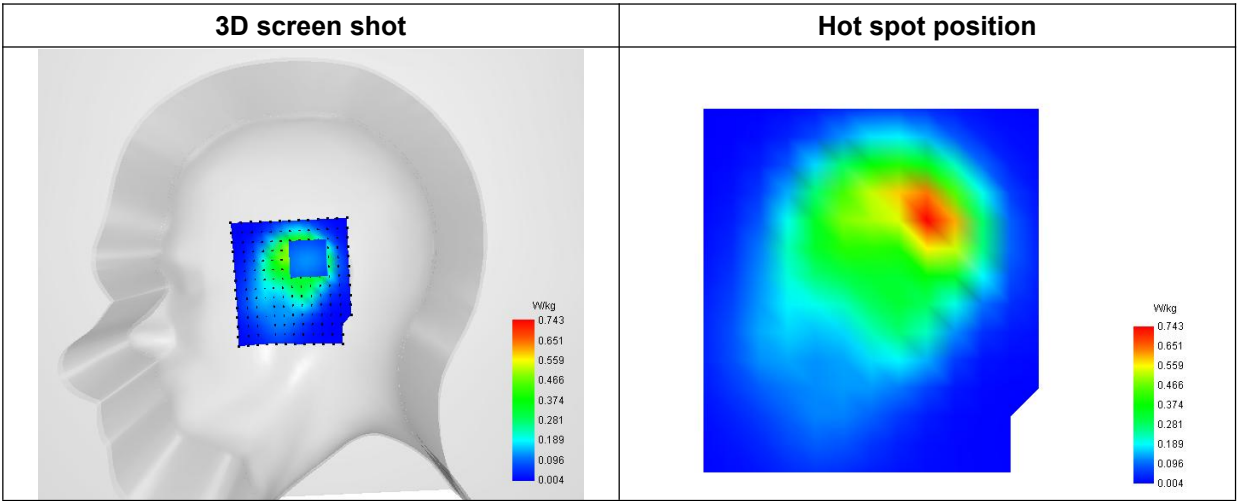

MEASUREMENT 15

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	NR n78_3450-3550MHz_ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	0.681700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

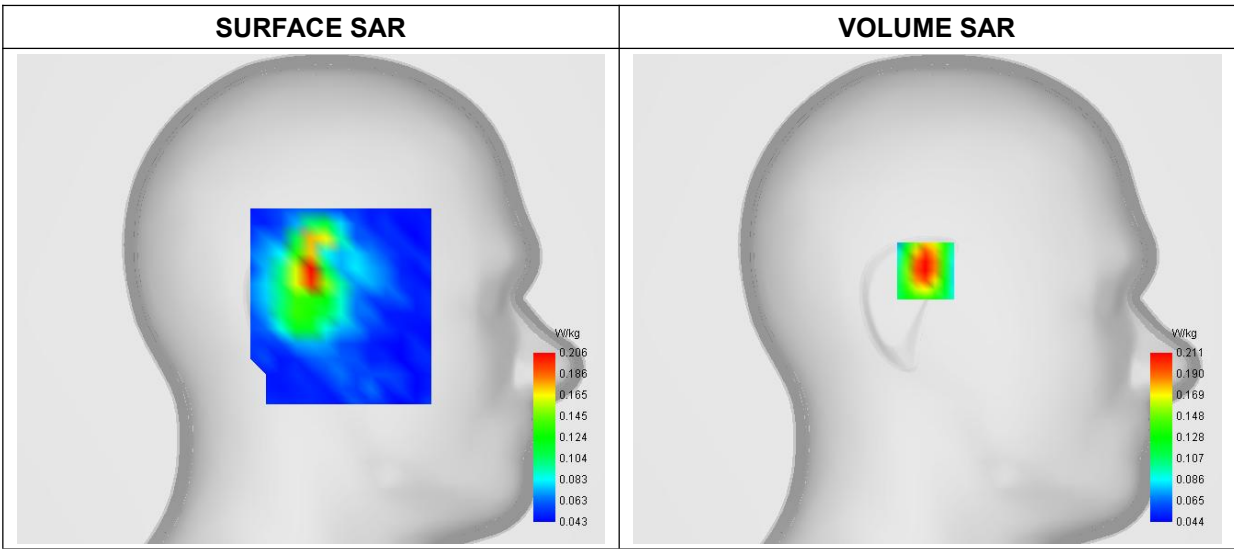


Maximum location: X=1.00, Y=15.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.110938
SAR 1g (W/Kg)	0.199814

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3962	0.2109	0.1127	0.0685	0.0532

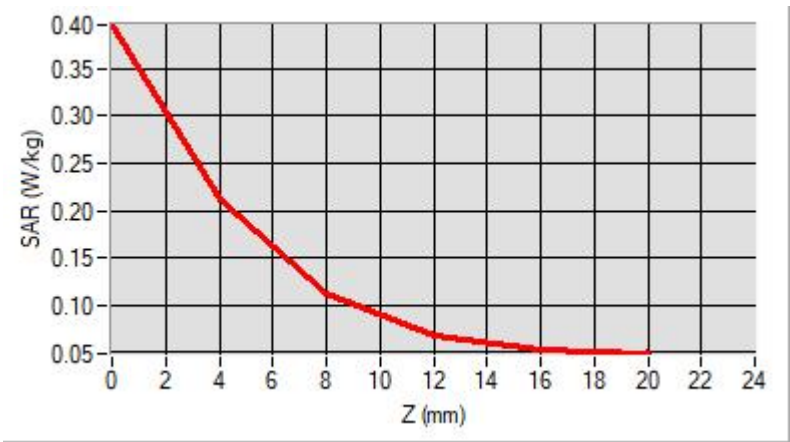

F. 3D Image

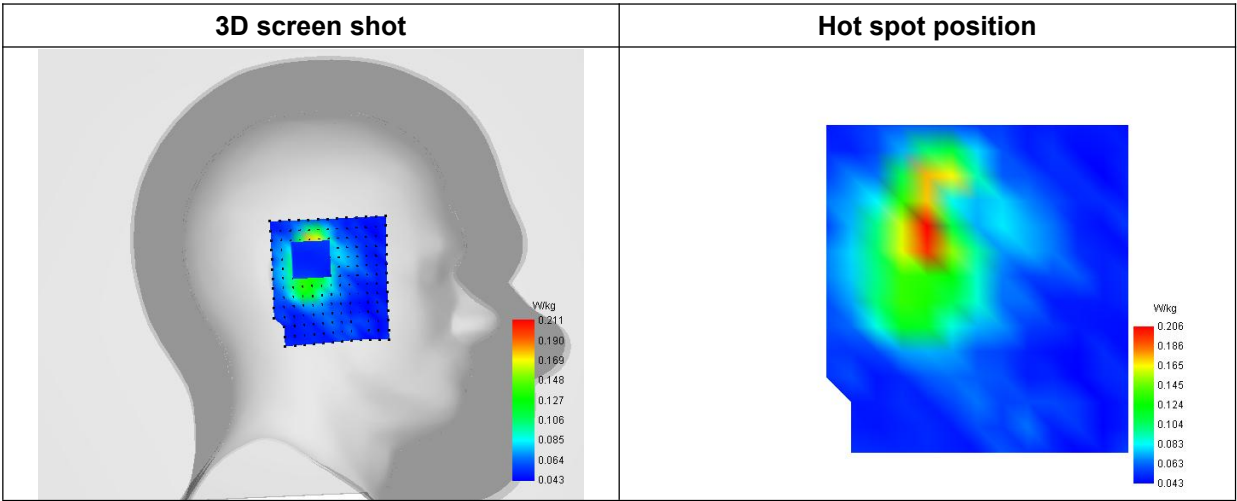

MEASUREMENT 16

Type: Measurement (Complete)
Date of measurement: 2024-07-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	NR n78_3700-3800MHz_ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative Permittivity (real part)	35.524623
Conductivity (S/m)	3.314571
Power Variation (%)	-1.951400
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

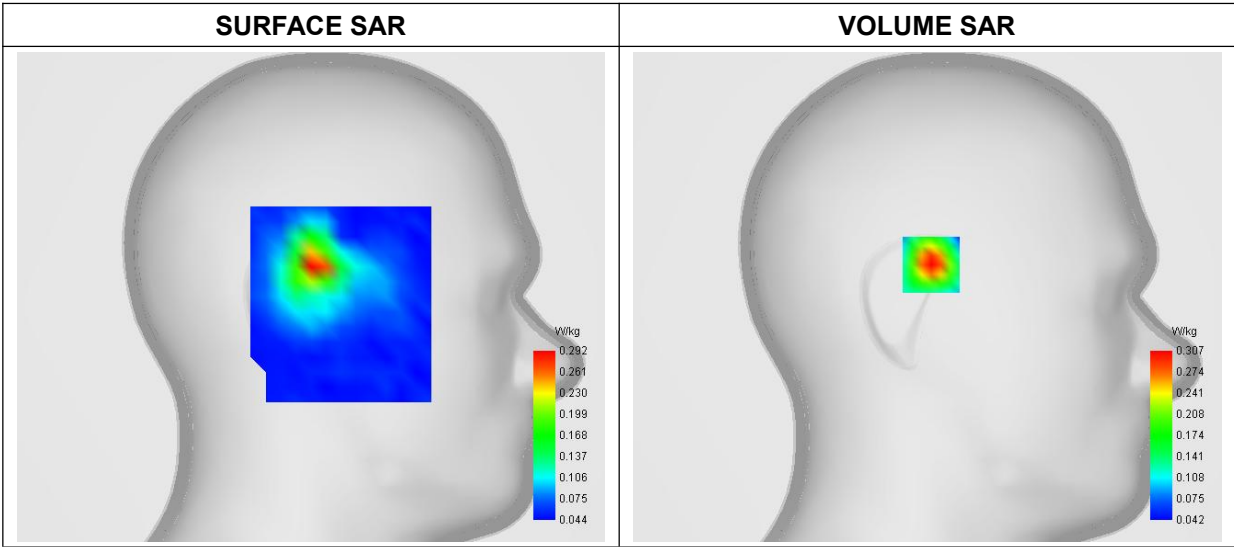


Maximum location: X=-2.00, Y=17.00
D. SAR 1g & 10g

SAR 10g (W/Kg)	0.142847
SAR 1g (W/Kg)	0.287334

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6403	0.3073	0.1435	0.0779	0.0597

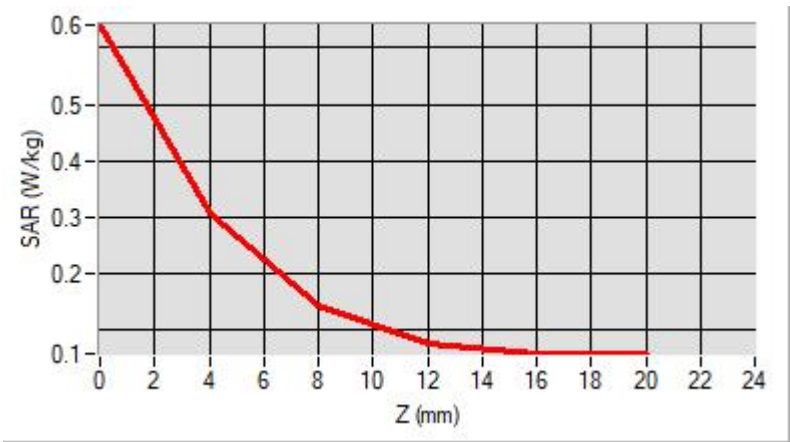

F. 3D Image

3D screen shot	Hot spot position
A 3D model of a human head in profile, showing a color-coded SAR distribution. The color scale ranges from 0.042 (blue) to 0.307 (red). The highest SAR values are concentrated in the central region of the head.	A 2D color-coded SAR distribution image showing the hot spot position. The color scale ranges from 0.044 (blue) to 0.292 (red). The highest SAR values are concentrated in the central region of the head.

MEASUREMENT 17

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	DC_2A_n78A_3450-3550MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	-1.427100
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

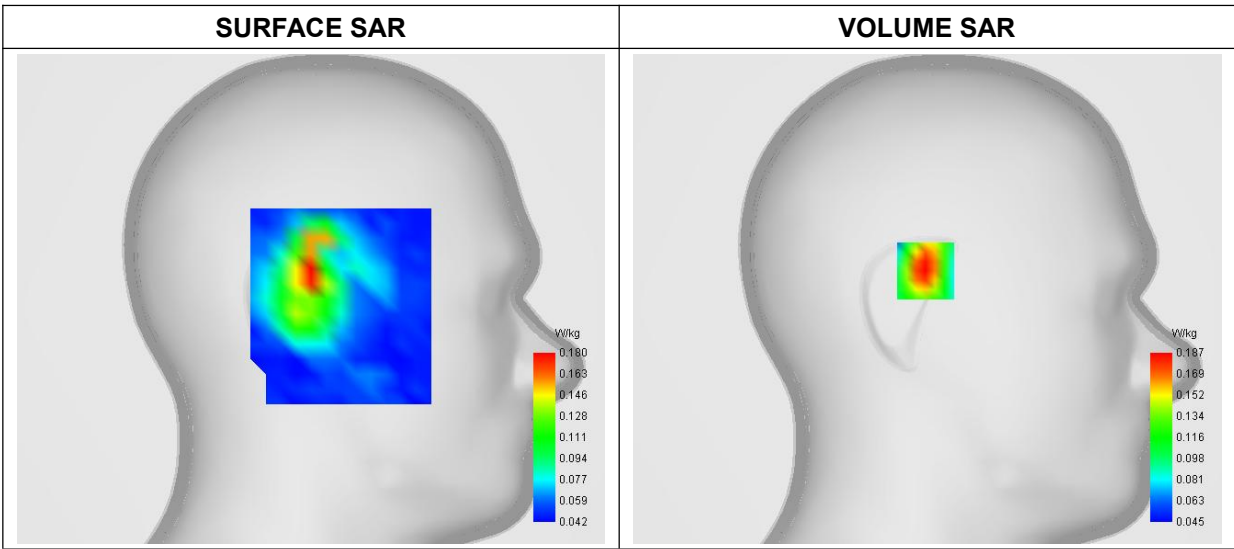


Maximum location: X=1.00, Y=15.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.103444
SAR 1g (W/Kg)	0.177629

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3509	0.1870	0.1017	0.0655	0.0558

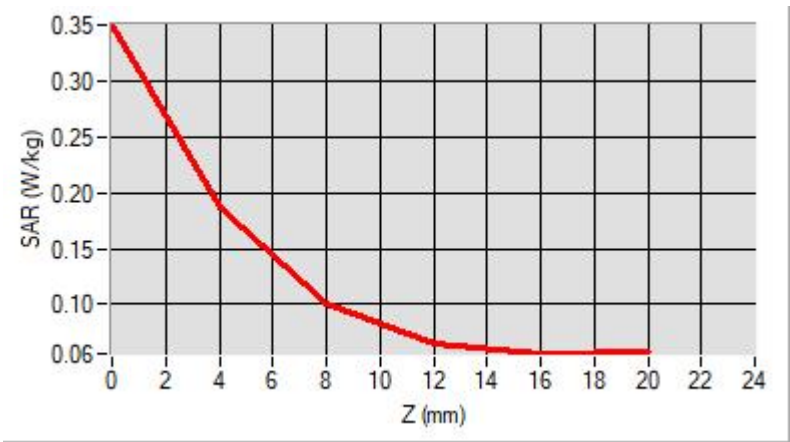

F. 3D Image

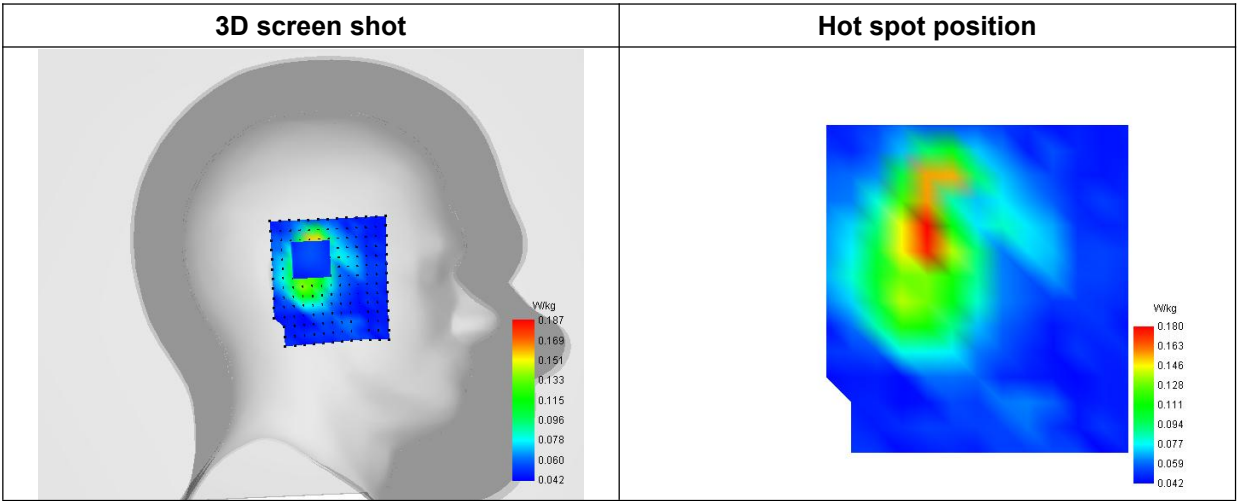

MEASUREMENT 18

Type: Measurement (Complete)
Date of measurement: 2024-07-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	DC_2A_n78A_3700-3800MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative Permittivity (real part)	35.524623
Conductivity (S/m)	3.314571
Power Variation (%)	-1.514700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

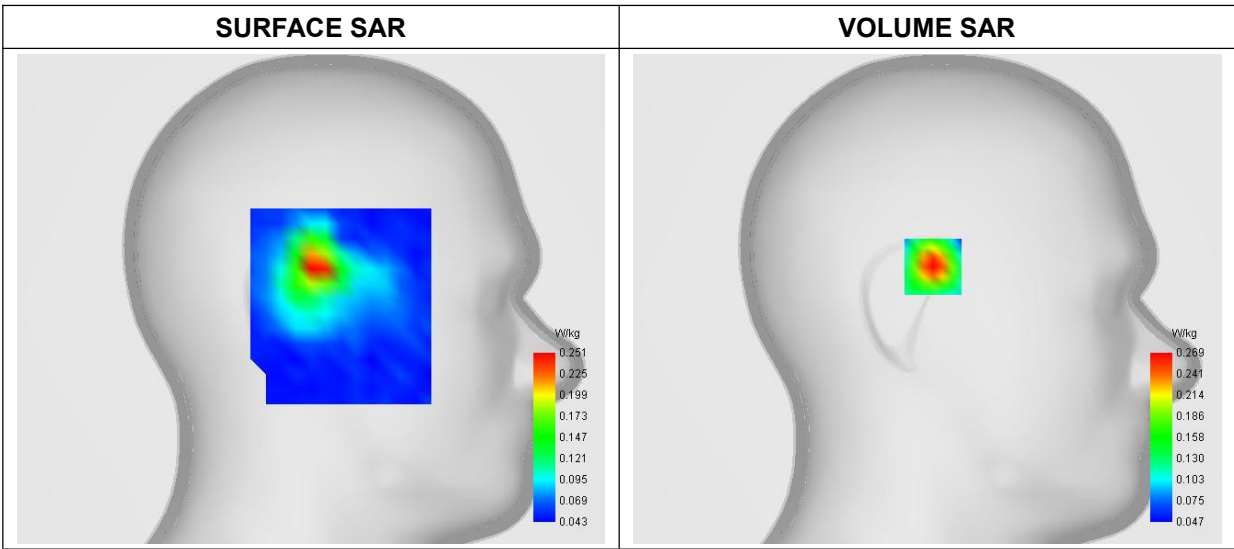


Maximum location: X=-3.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.129084
SAR 1g (W/Kg)	0.253147

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5639	0.2690	0.1254	0.0693	0.0554

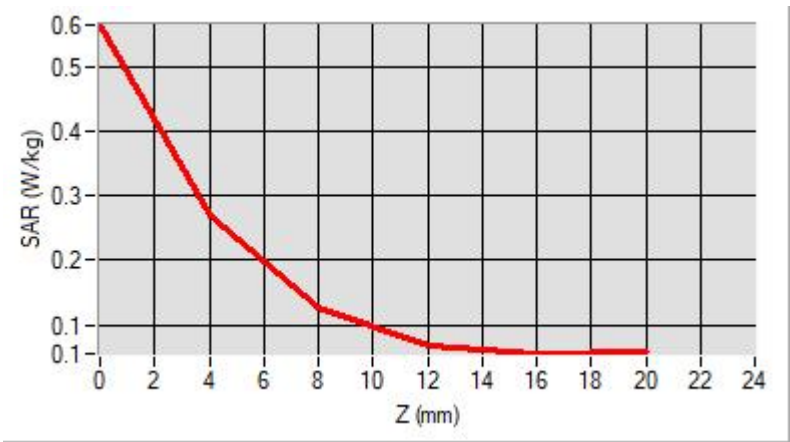

F. 3D Image

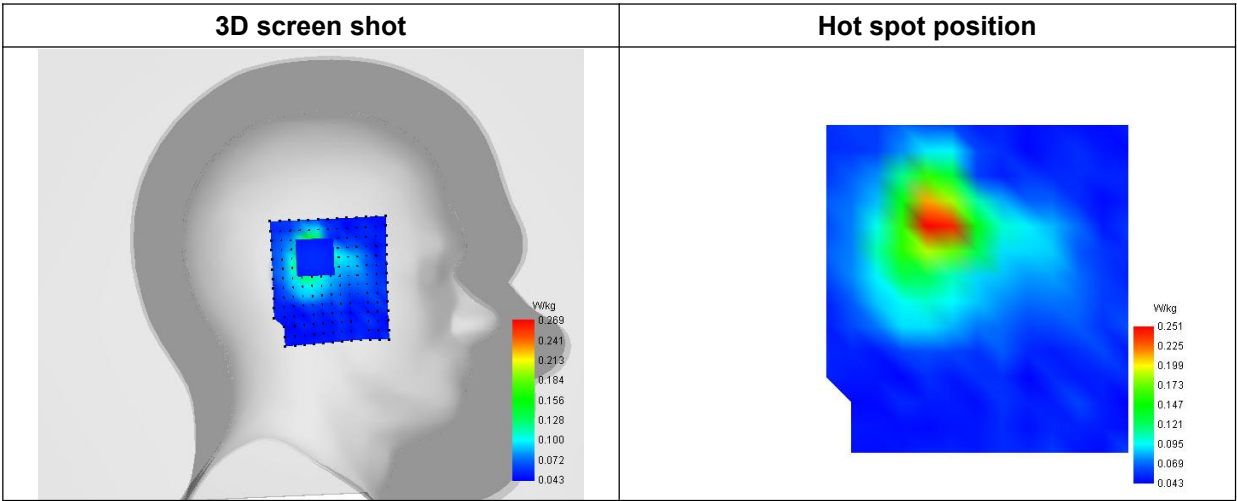

MEASUREMENT 19

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	DC_7A_n78A_3450-3550MHz_ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	1.184700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

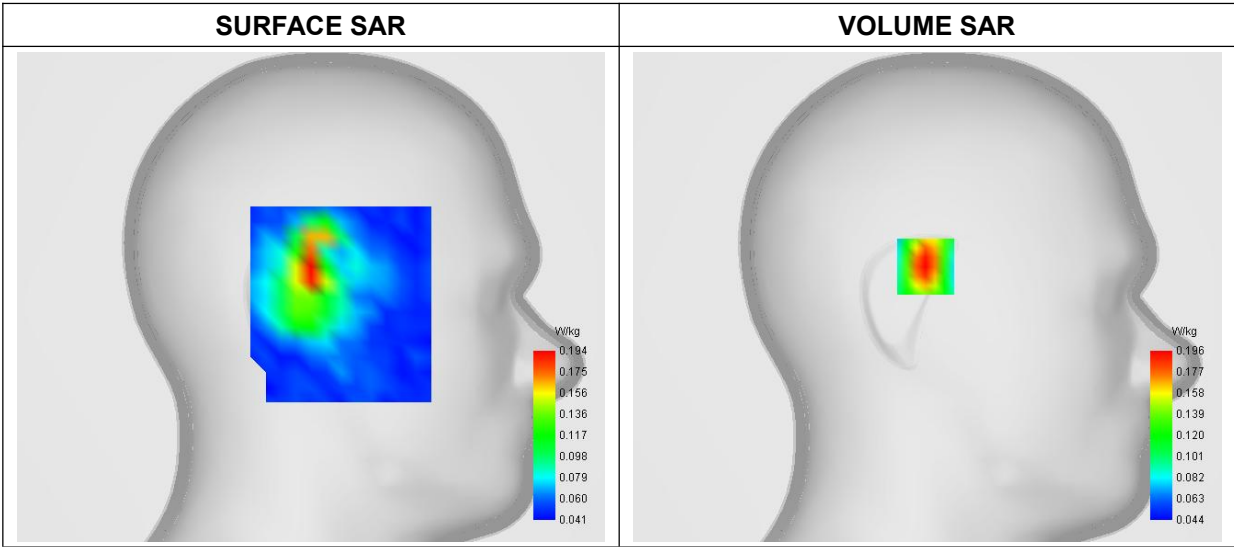


Maximum location: X=1.00, Y=16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.105339
SAR 1g (W/Kg)	0.184792

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3667	0.1959	0.1058	0.0659	0.0531

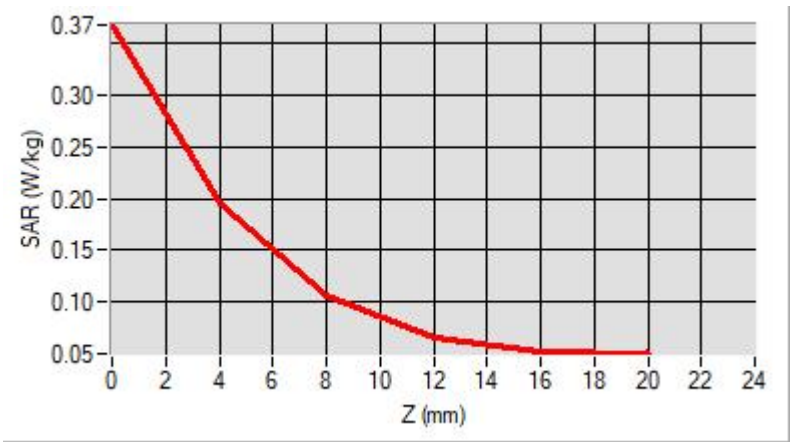

F. 3D Image

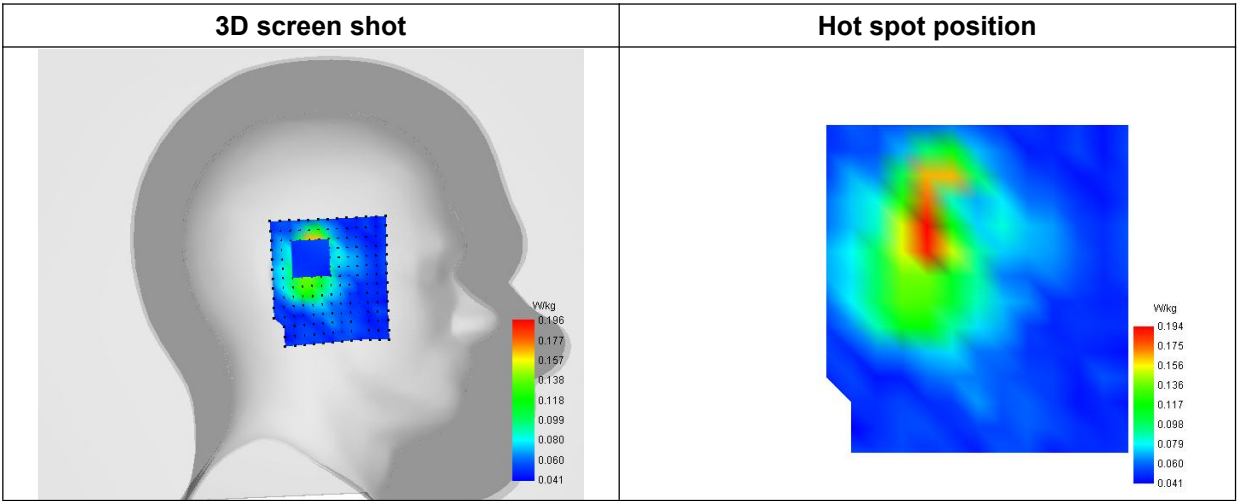

MEASUREMENT 20

Type: Measurement (Complete)
Date of measurement: 2024-07-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	DC_7A_n78A_3700-3800MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative Permittivity (real part)	35.524623
Conductivity (S/m)	3.314571
Power Variation (%)	1.184700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

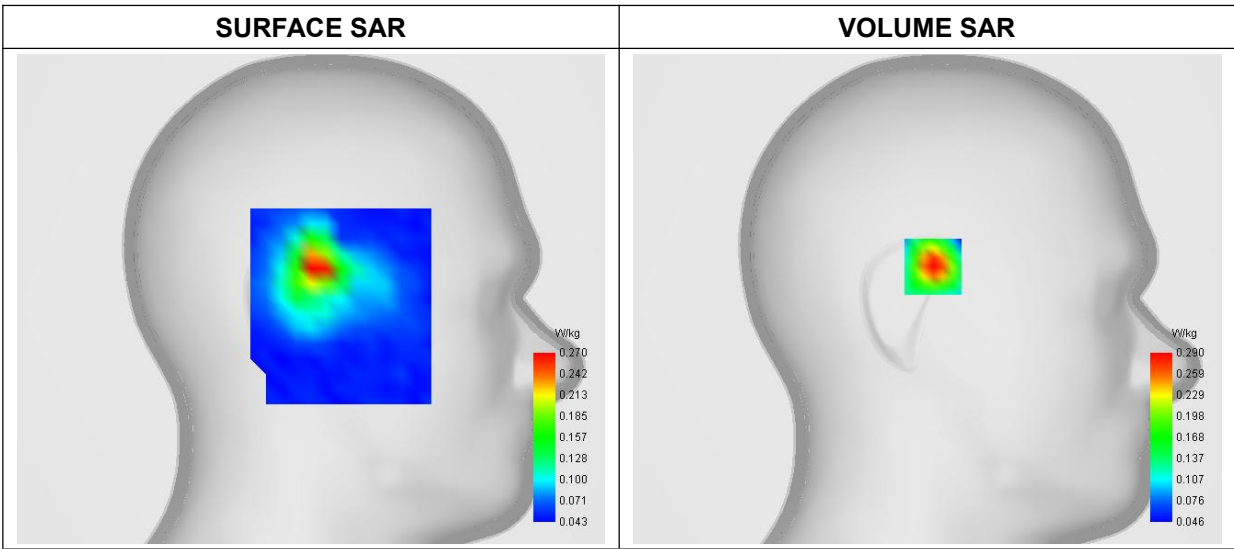


Maximum location: X=-3.00, Y=17.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.134832
SAR 1g (W/Kg)	0.272221

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6141	0.2898	0.1320	0.0696	0.0524

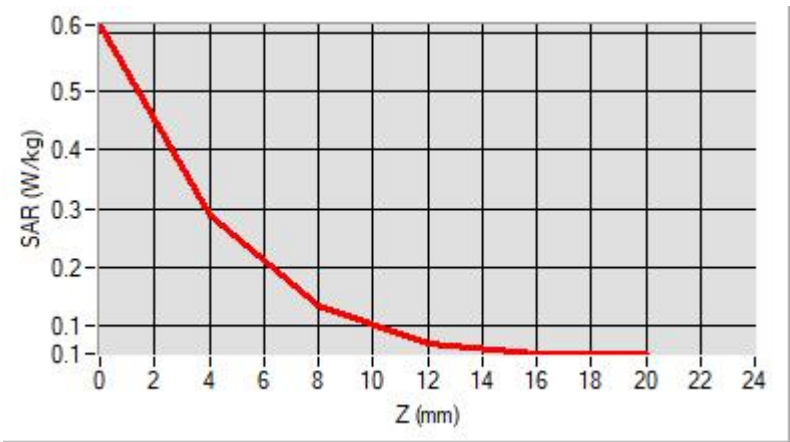

F. 3D Image

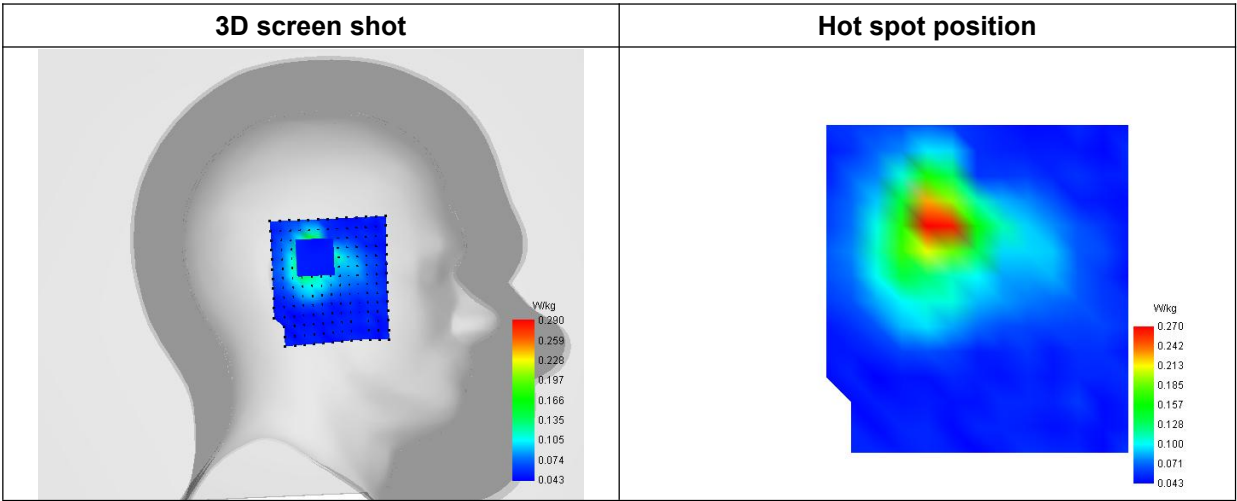

MEASUREMENT 21

Type: Measurement (Complete)
Date of measurement: 2024-08-02
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.91; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.2GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5240.000000
Relative Permittivity (real part)	36.931548
Conductivity (S/m)	4.634785
Power Variation (%)	1.175800
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

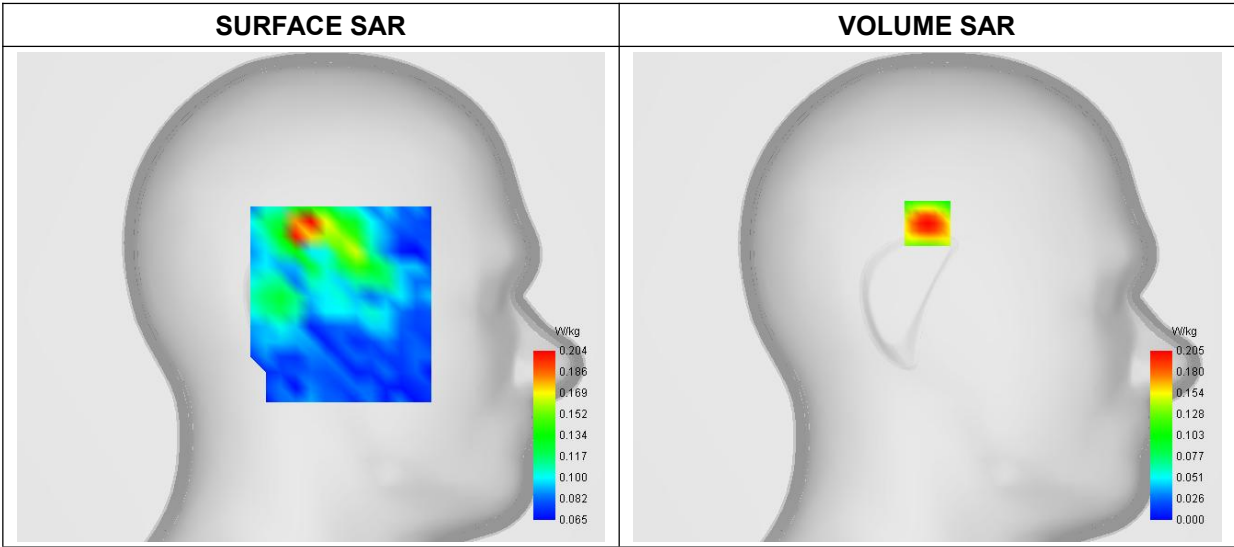


Maximum location: X=0.00, Y=39.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.114674
SAR 1g (W/Kg)	0.199007

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3133	0.2052	0.1354	0.0929	0.0700	0.0593	0.0566	0.0595	0.0651

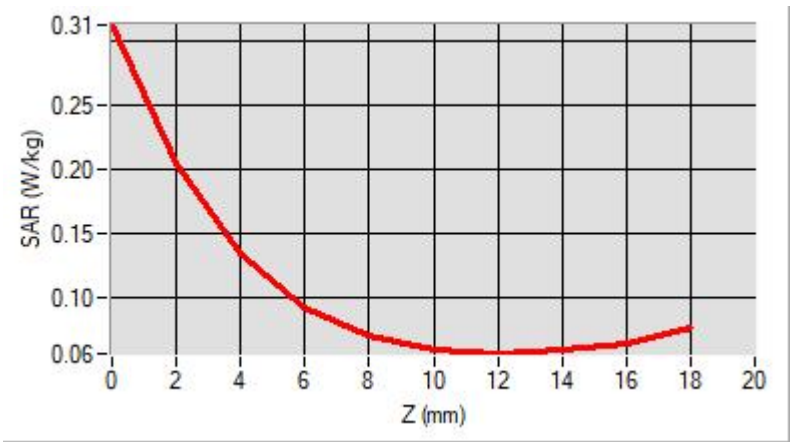

F. 3D Image

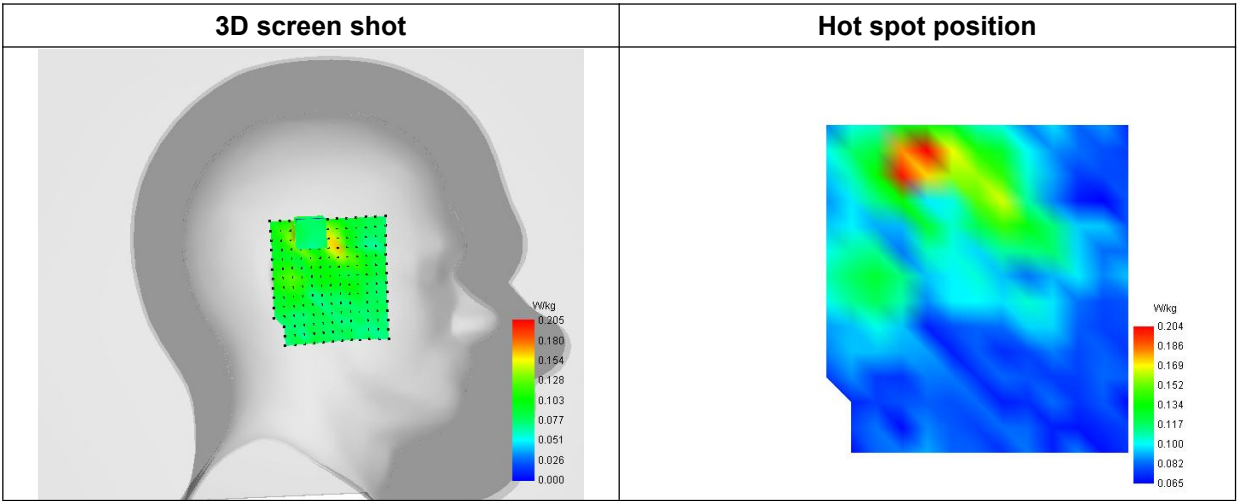

MEASUREMENT 22

Type: Measurement (Complete)
Date of measurement: 2024-08-02
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.91; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.3GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5260.000000
Relative Permittivity (real part)	36.931857
Conductivity (S/m)	4.631977
Power Variation (%)	1.185800
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

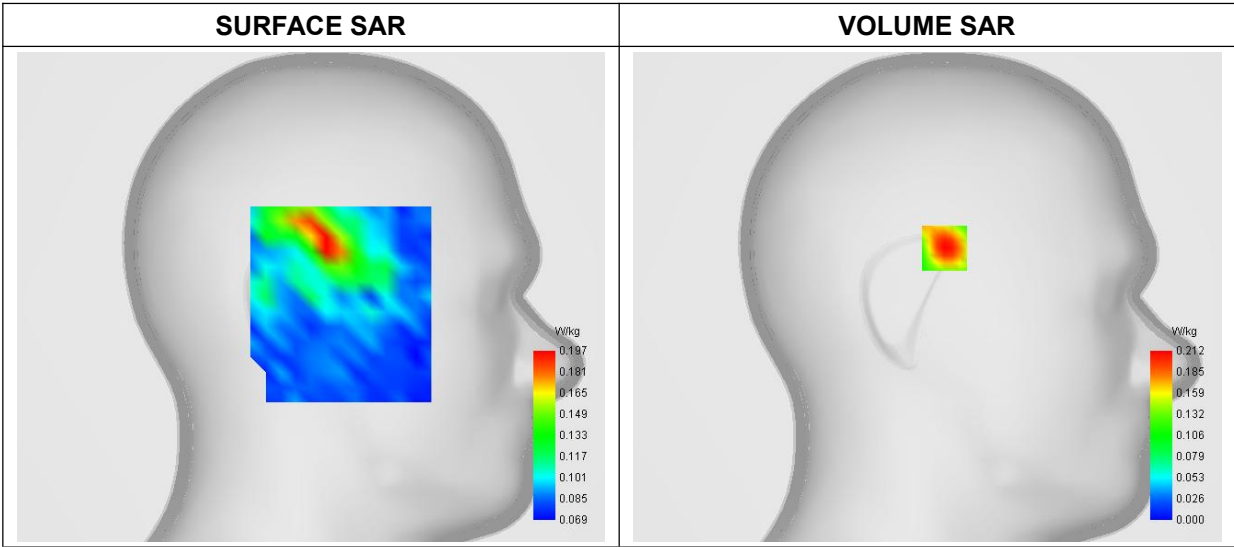


Maximum location: X=-9.00, Y=26.00
D. SAR 1g & 10g

SAR 10g (W/Kg)	0.121525
SAR 1g (W/Kg)	0.209718

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3285	0.2118	0.1355	0.0904	0.0674	0.0577	0.0569	0.0624	0.0742

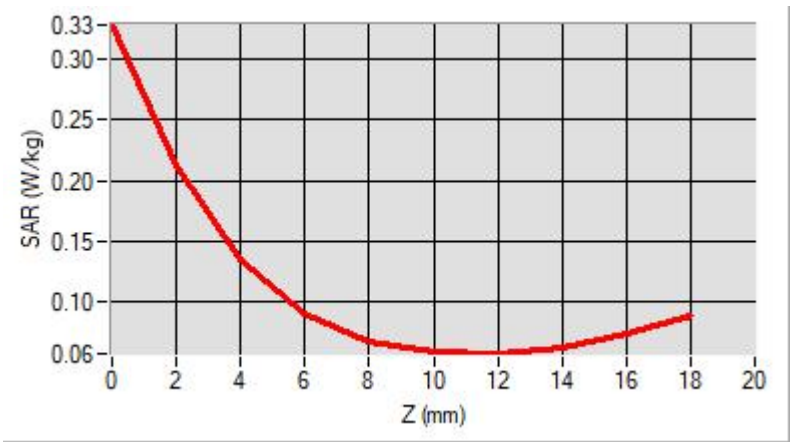

F. 3D Image

3D screen shot	Hot spot position
A 3D screen shot of a human head model showing SAR distribution. A color scale on the right indicates SAR values from 0.000 to 0.212 W/kg.	A hot spot position image showing SAR distribution. A color scale on the right indicates SAR values from 0.069 to 0.197 W/kg.

MEASUREMENT 23

Type: Measurement (Complete)
Date of measurement: 2024-08-03
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.25; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.6GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5700.000000
Relative Permittivity (real part)	35.881745
Conductivity (S/m)	5.111478
Power Variation (%)	1.159800
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

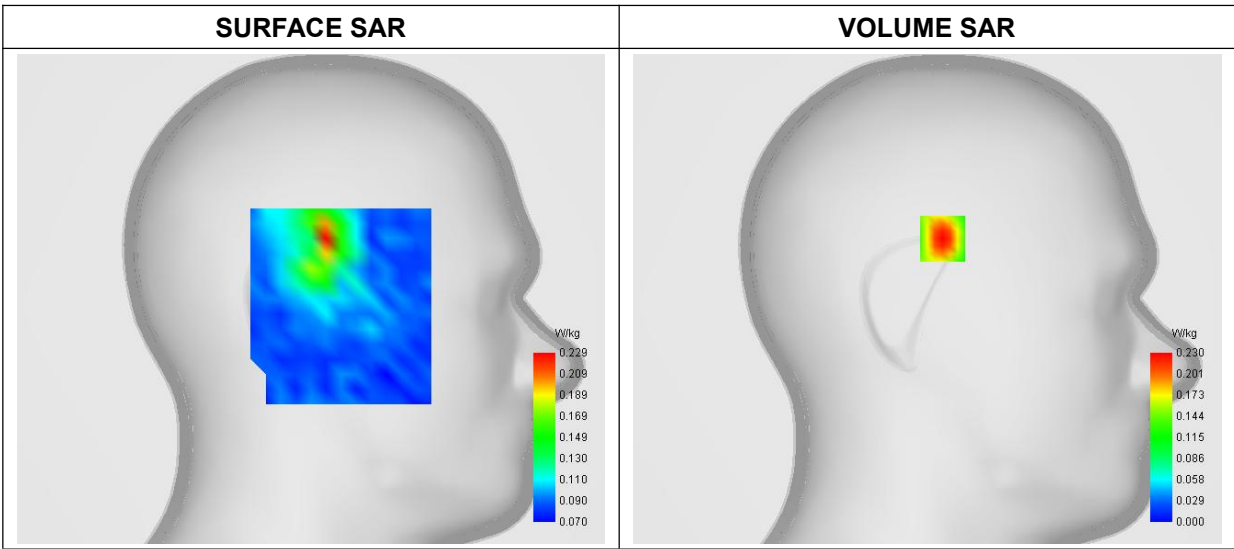


Maximum location: X=-8.00, Y=32.00
D. SAR 1g & 10g

SAR 10g (W/Kg)	0.126760
SAR 1g (W/Kg)	0.206018

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3481	0.2302	0.1528	0.1054	0.0798	0.0677	0.0644	0.0673	0.0719

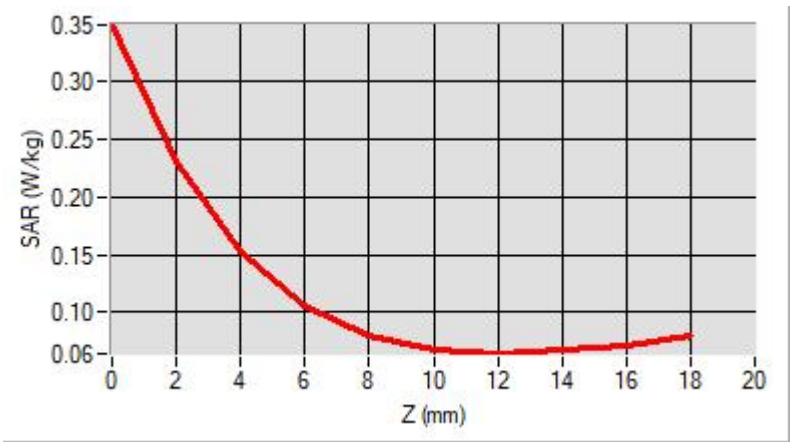

F. 3D Image

3D screen shot	Hot spot position
A 3D screen shot of a human head model showing SAR distribution. A color scale on the right indicates SAR values from 0.000 to 0.230 W/kg. The highest SAR values are concentrated in the brain area.	A hot spot position image showing SAR distribution. A color scale on the right indicates SAR values from 0.070 to 0.229 W/kg. The highest SAR values are concentrated in the brain area.

MEASUREMENT 24

Type: Measurement (Complete)
Date of measurement: 2024-08-03
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.15; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	WiFi(5.8GHz)_802.11a
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5825.000000
Relative Permittivity (real part)	35.172917
Conductivity (S/m)	5.321778
Power Variation (%)	1.677800
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

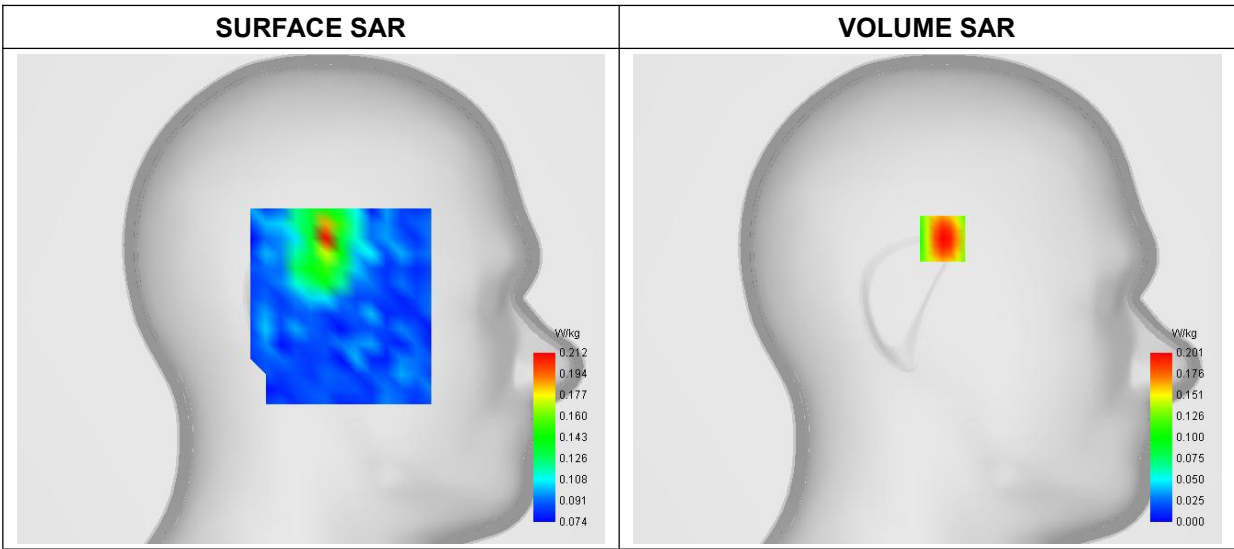


Maximum location: X=-8.00, Y=32.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.122179
SAR 1g (W/Kg)	0.189376

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2863	0.2009	0.1370	0.0979	0.0771	0.0680	0.0669	0.0715	0.0880

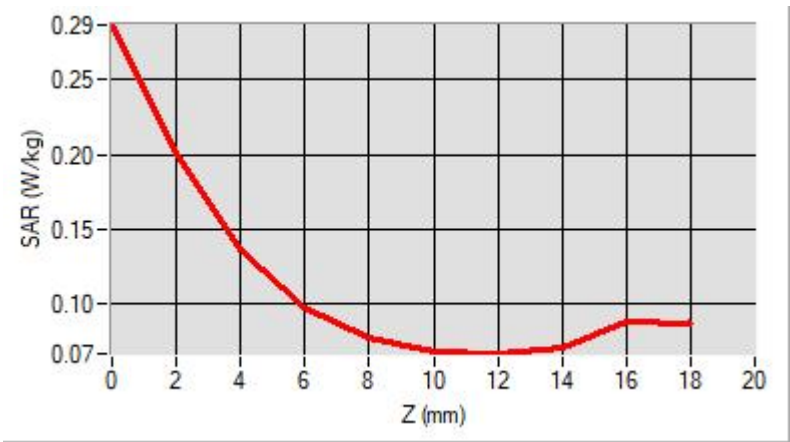

F. 3D Image

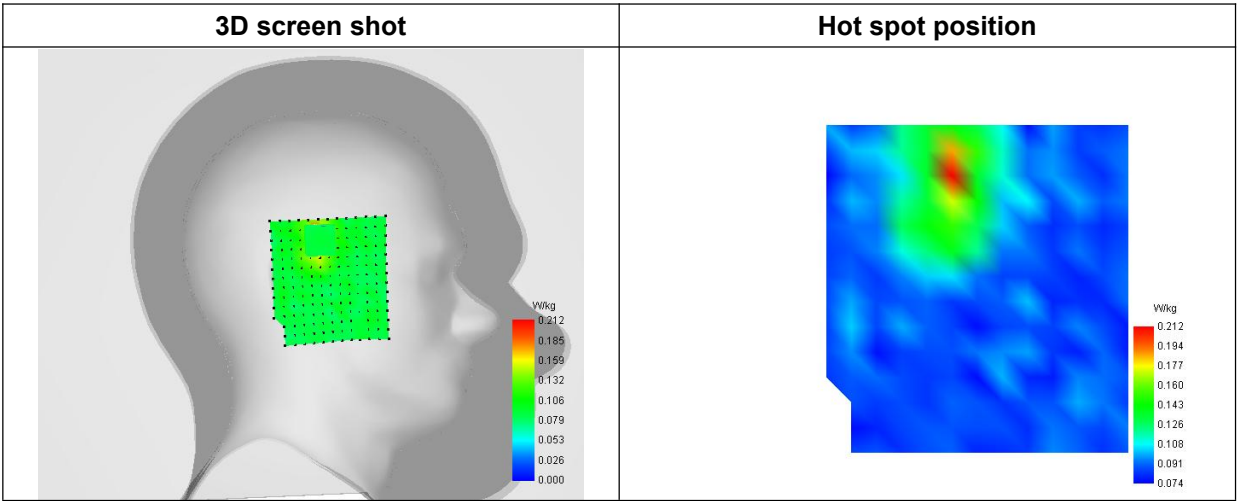

MEASUREMENT 25

Type: Measurement (Complete)
Date of measurement: 2024-08-01
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2462.000000
Relative Permittivity (real part)	39.094386
Conductivity (S/m)	1.724296
Power Variation (%)	-0.487400
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

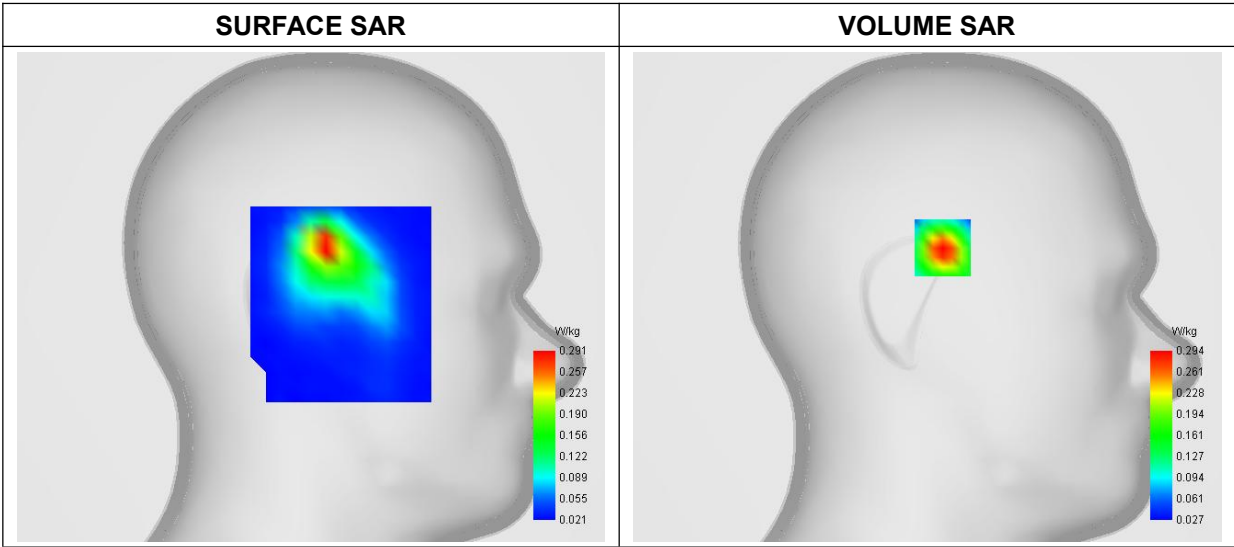


Maximum location: X=-8.00, Y=26.00
D. SAR 1g & 10g

SAR 10g (W/Kg)	0.135530
SAR 1g (W/Kg)	0.269578

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5334	0.2944	0.1600	0.0922	0.0610

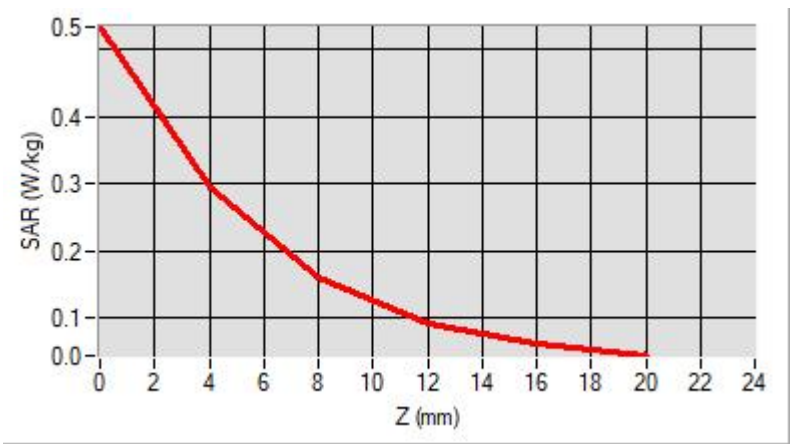

F. 3D Image

3D screen shot	Hot spot position
A 3D rendering of a human head model in profile. A rectangular area on the side of the head is highlighted with a color gradient from blue to red, indicating the hot spot. A color scale on the right ranges from 0.021 to 0.294 W/kg.	A 2D color map showing the hot spot position. The color gradient ranges from blue (low SAR) to red (high SAR). A color scale on the right ranges from 0.021 to 0.291 W/kg.

MEASUREMENT 26

Type: Measurement (Complete)
Date of measurement: 2024-08-01
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.29; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Left head
Device Position	Cheek
Band	Bluetooth_π/4 DQPSK
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2480.000000
Relative Permittivity (real part)	39.094736
Conductivity (S/m)	1.721487
Power Variation (%)	0.196100
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

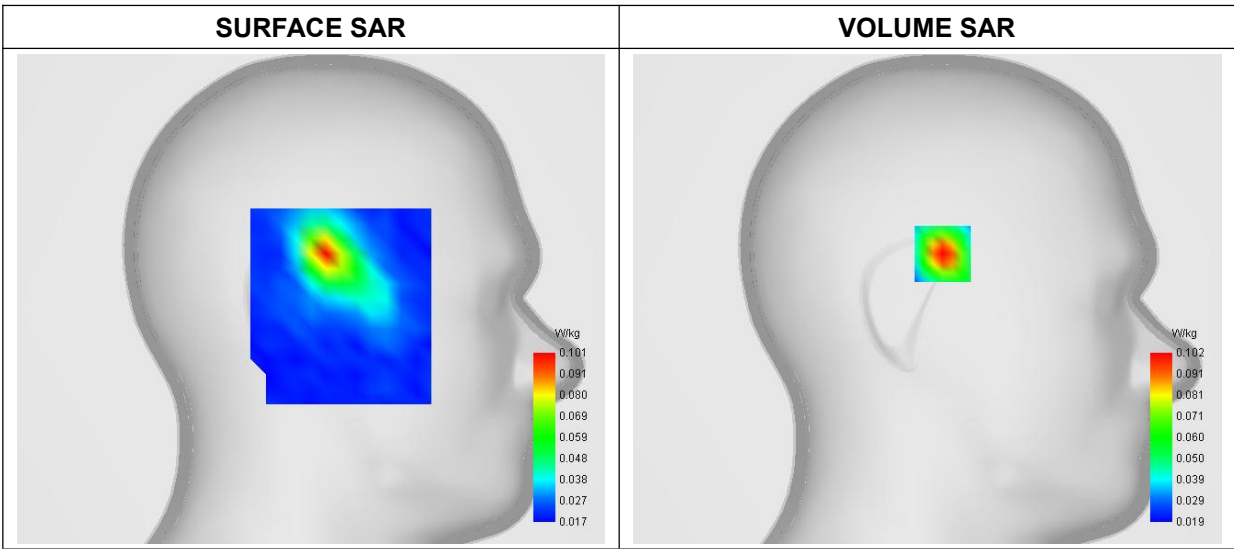


Maximum location: X=-8.00, Y=24.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.052419
SAR 1g (W/Kg)	0.092608

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.1668	0.1019	0.0630	0.0419	0.0314

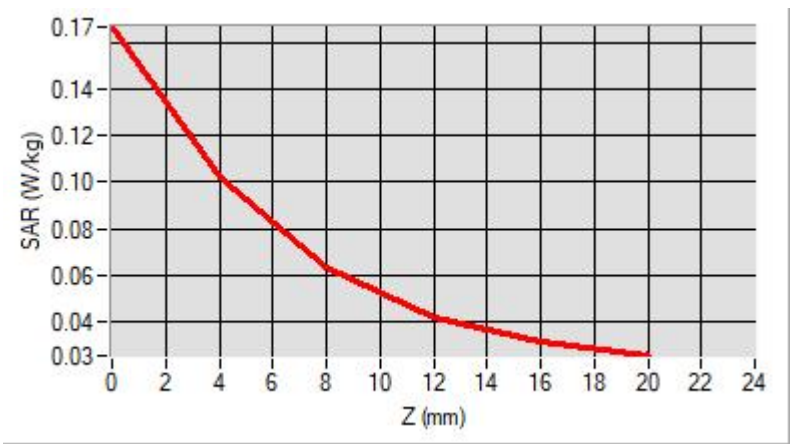

F. 3D Image

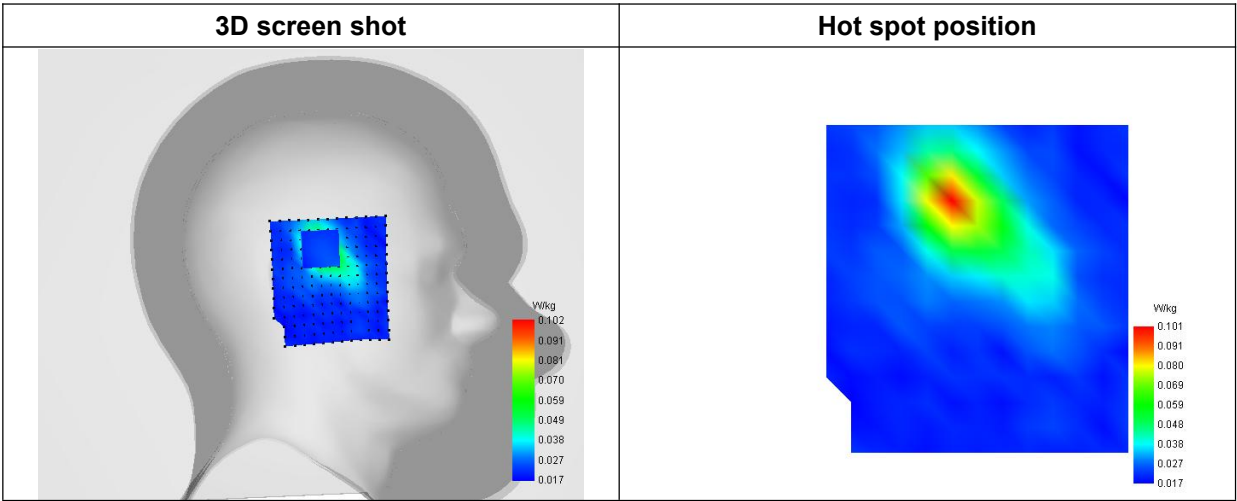

MEASUREMENT 27

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental condition

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	824.200000
Relative Permittivity (real part)	42.314485
Conductivity (S/m)	0.864623
Power Variation (%)	1.758100
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

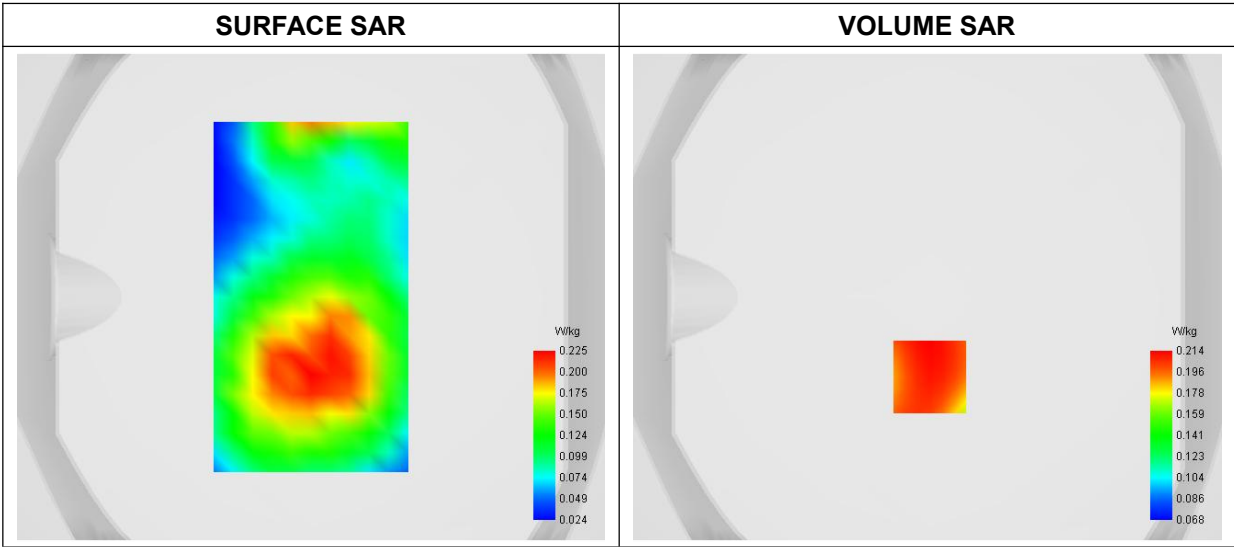


Maximum location: X=1.00, Y=-33.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.155057
SAR 1g (W/Kg)	0.208077

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.4374	0.2143	0.1530	0.1299	0.0987

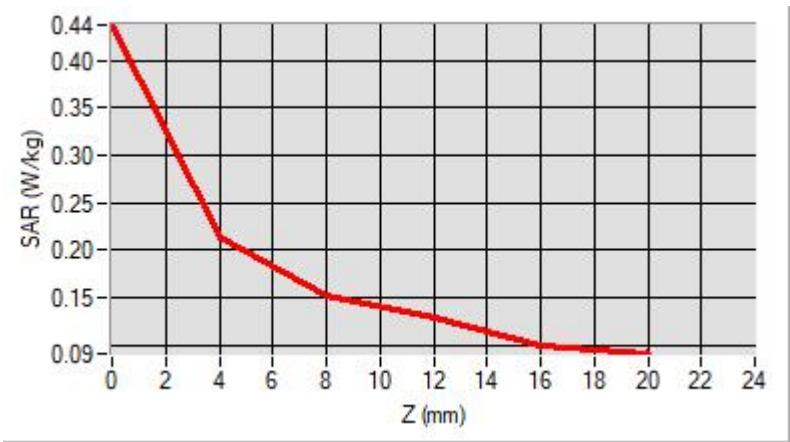

F. 3D Image

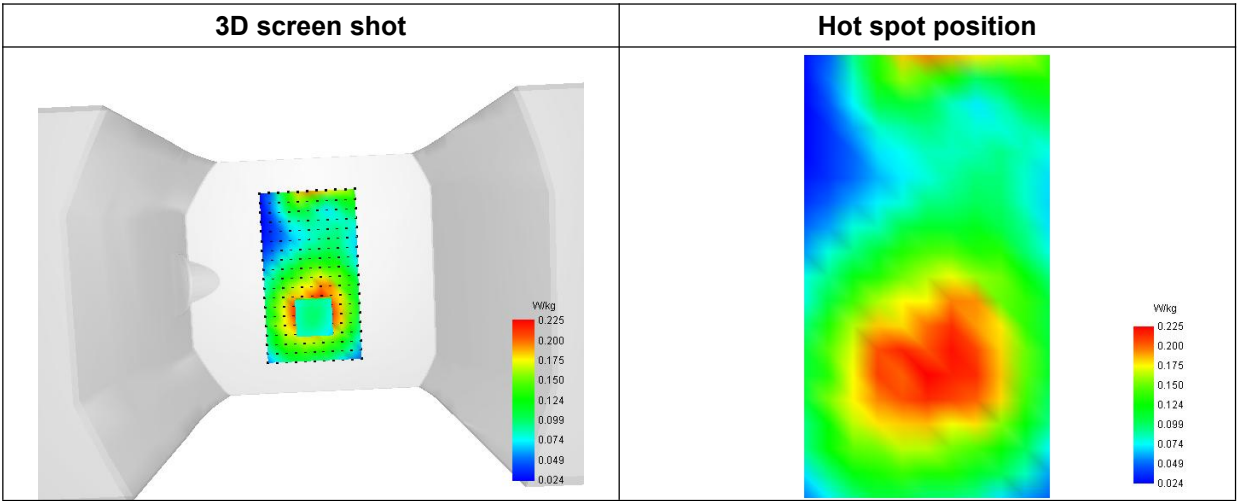

MEASUREMENT 28

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	39.282174
Conductivity (S/m)	1.373826
Power Variation (%)	1.134700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

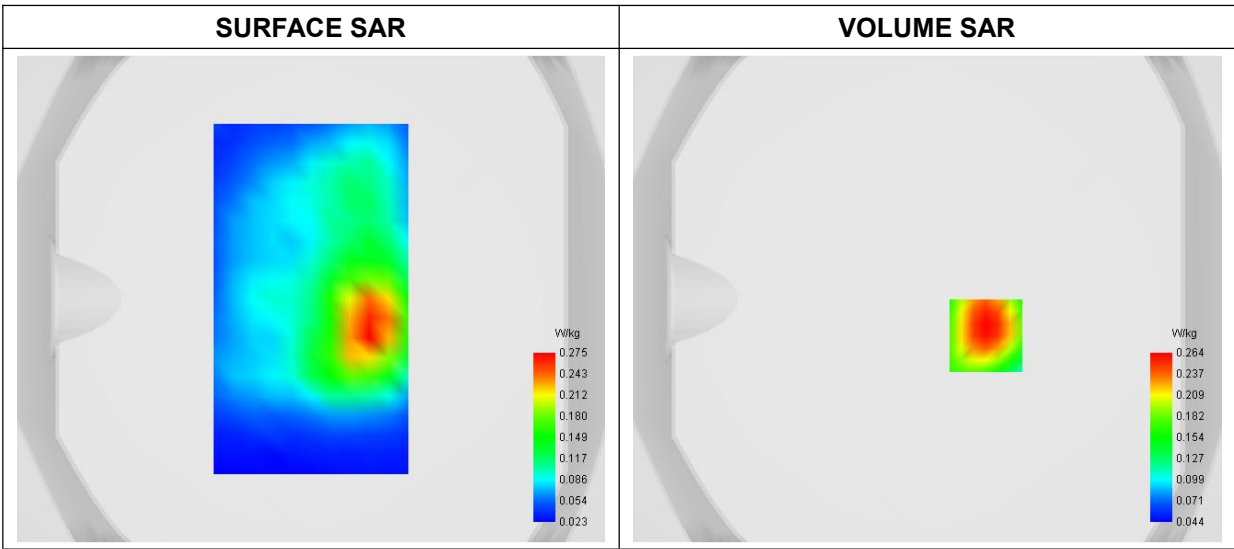


Maximum location: X=24.00, Y=-15.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.156420
SAR 1g (W/Kg)	0.248846

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5629	0.2642	0.1742	0.1376	0.0929

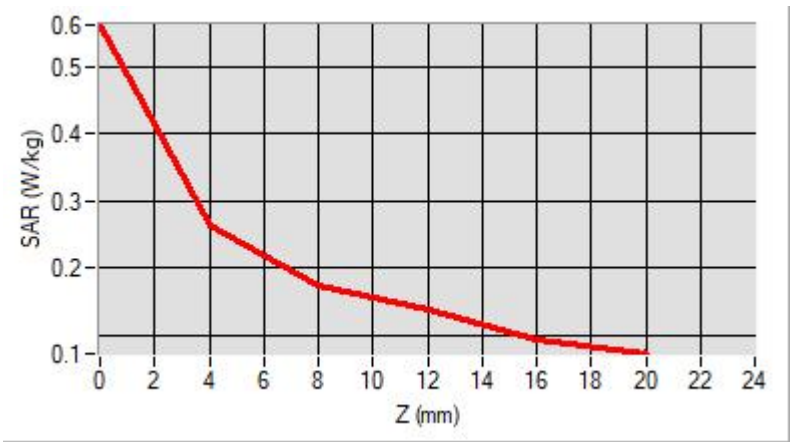

F. 3D Image

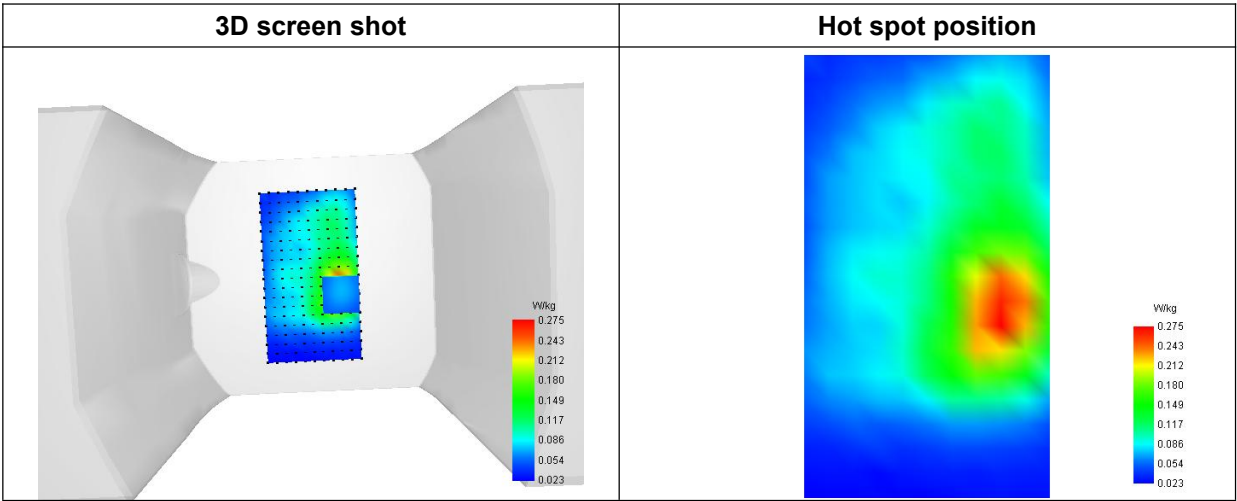

MEASUREMENT 29

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative Permittivity (real part)	39.283614
Conductivity (S/m)	1.370620
Power Variation (%)	1.518400
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

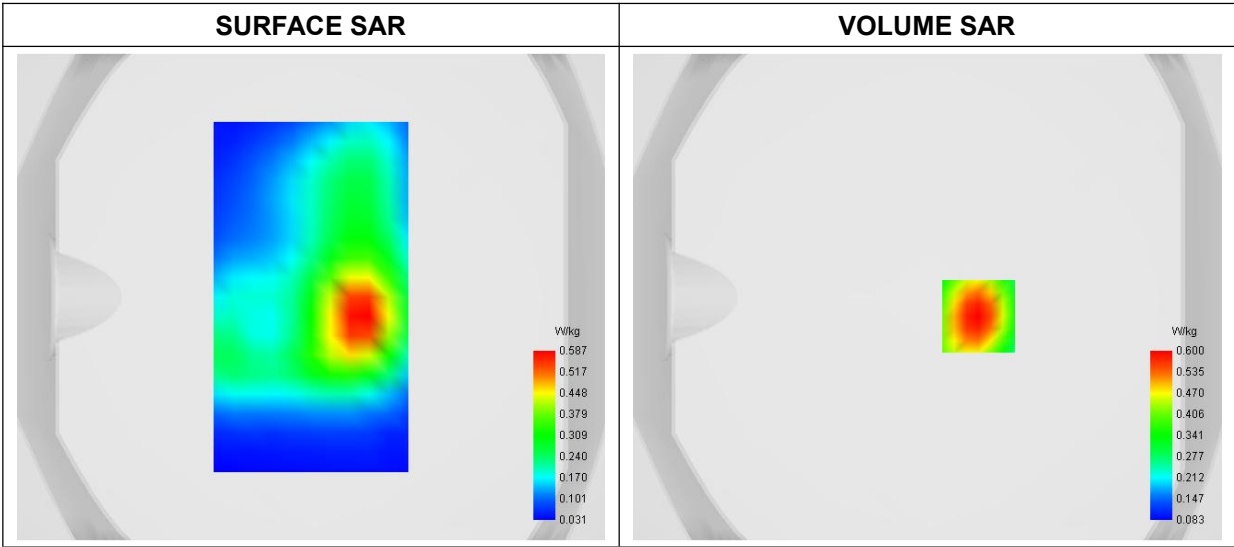


Maximum location: X=21.00, Y=-8.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.338386
SAR 1g (W/Kg)	0.561062

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.8812	0.5997	0.4072	0.2810	0.1992

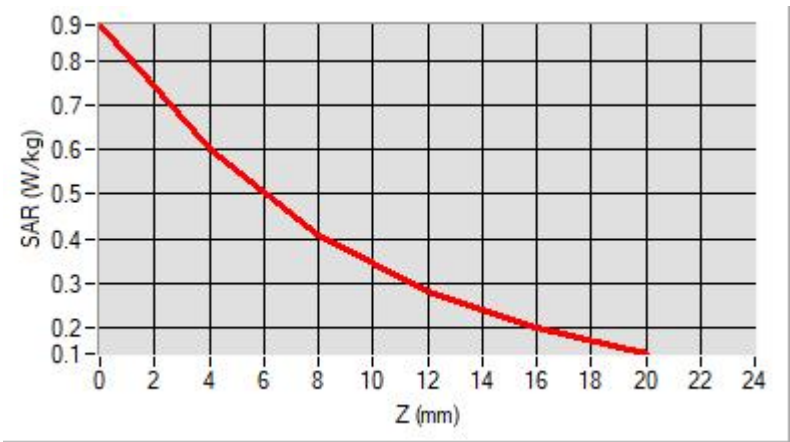

F. 3D Image

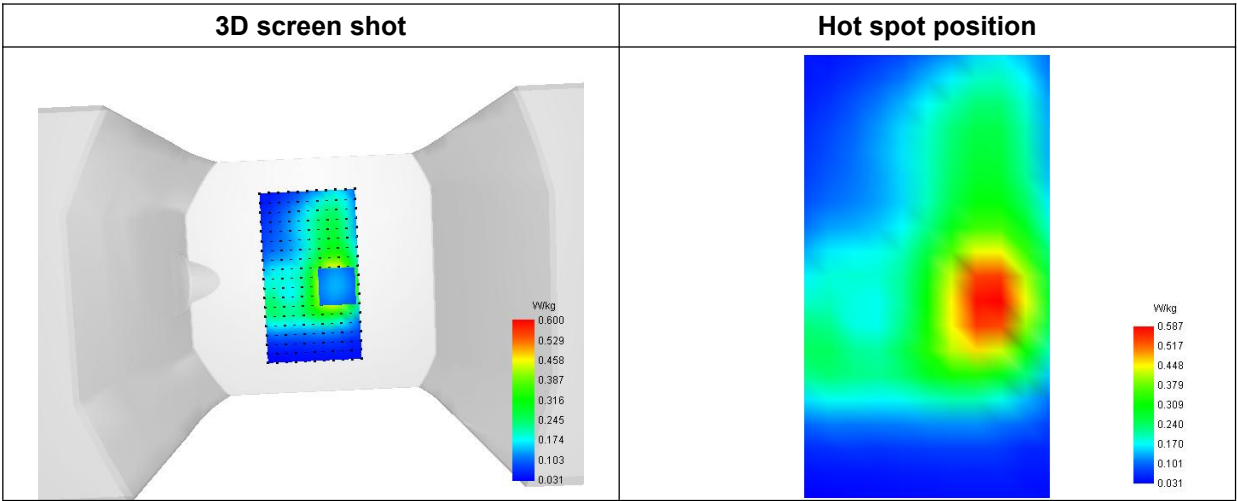

MEASUREMENT 30

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1700_RMC
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1752.600000
Relative Permittivity (real part)	39.281488
Conductivity (S/m)	1.372012
Power Variation (%)	-0.681700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

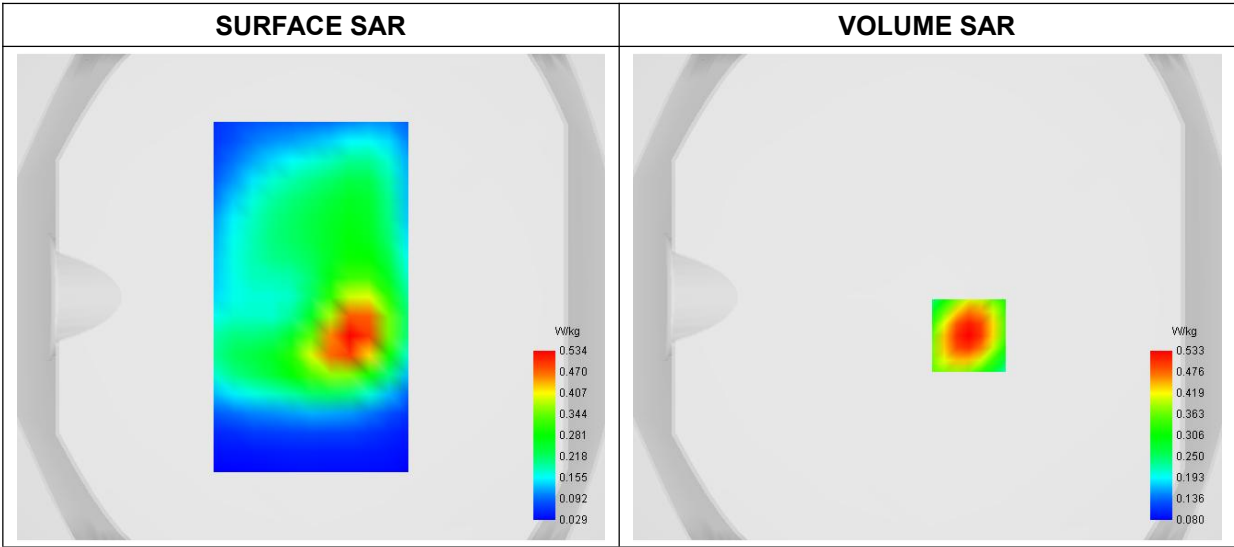


Maximum location: X=17.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.308347
SAR 1g (W/Kg)	0.497468

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.7600	0.5326	0.3734	0.2662	0.1946

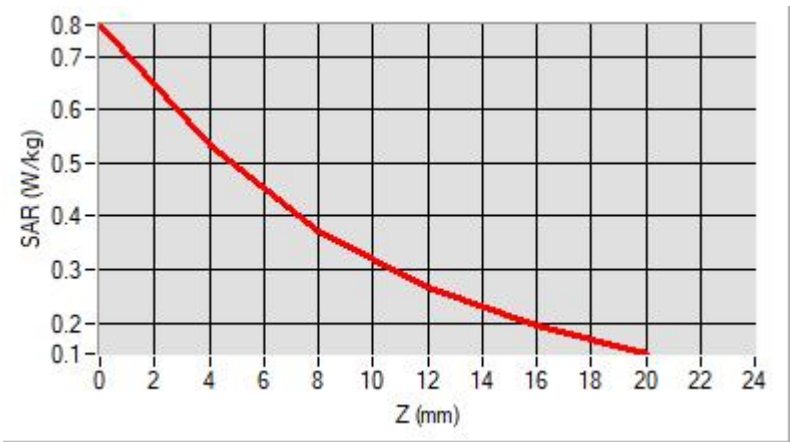

F. 3D Image

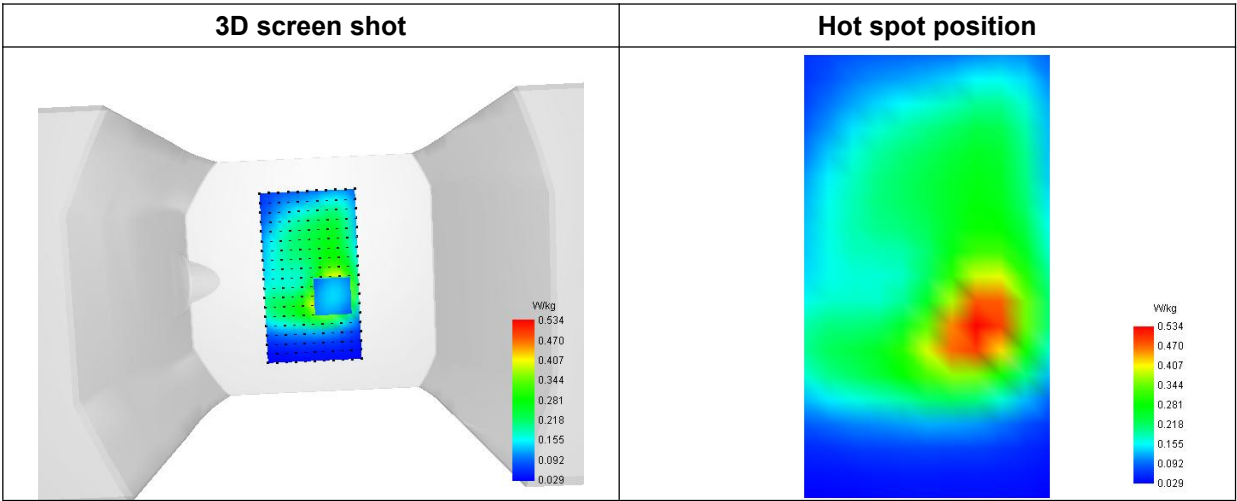

MEASUREMENT 31

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	826.400000
Relative Permittivity (real part)	42.313176
Conductivity (S/m)	0.862071
Power Variation (%)	-0.471700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

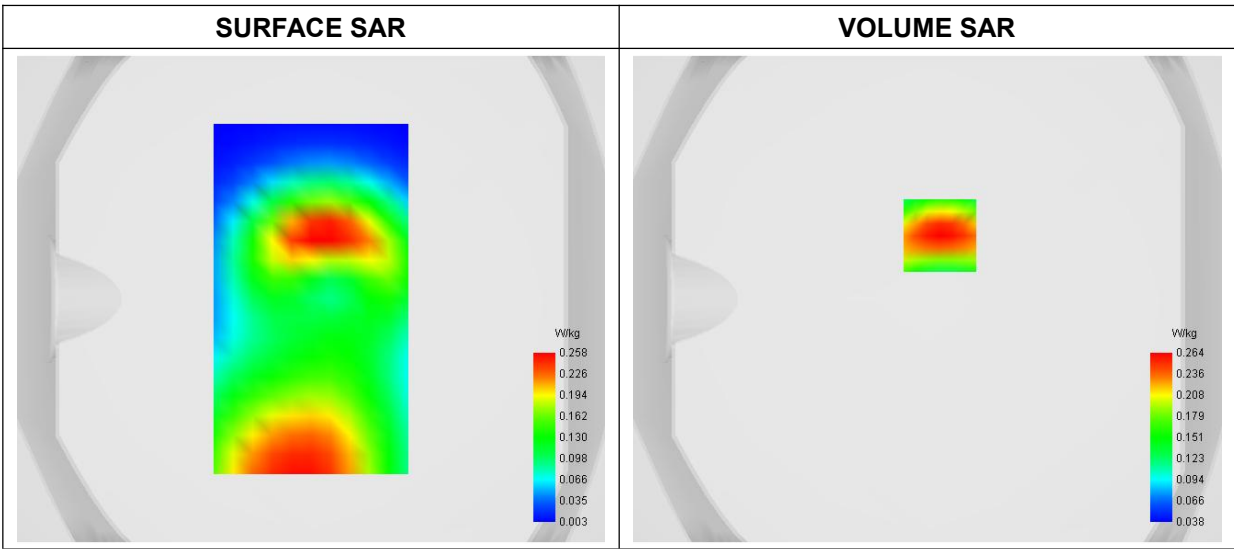


Maximum location: X=5.00, Y=26.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.150646
SAR 1g (W/Kg)	0.247199

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3831	0.2642	0.1815	0.1262	0.0895

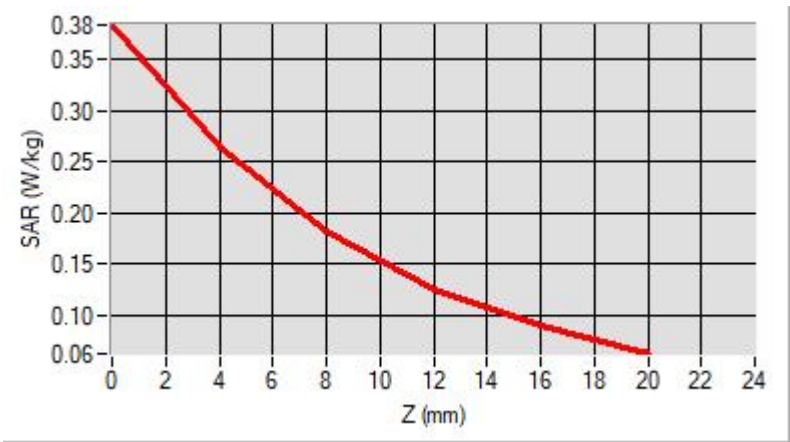

F. 3D Image

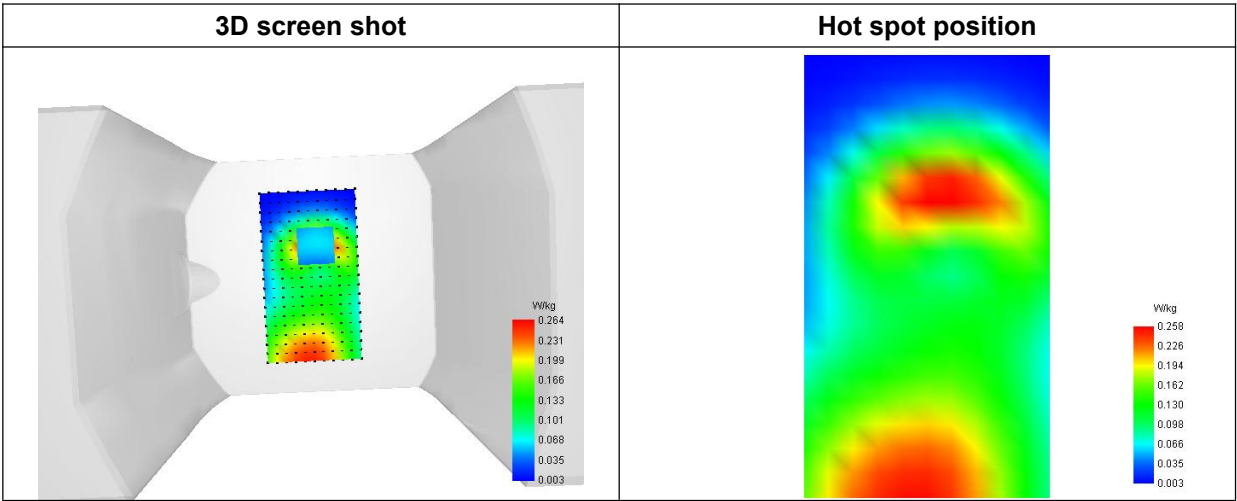

MEASUREMENT 32

Type: Measurement (Complete)
Date of measurement: 2024-07-25
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.21; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	FDD-LTE Band 2_QPSK, 20MHz
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative Permittivity (real part)	41.254216
Conductivity (S/m)	1.393689
Power Variation (%)	-1.031700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

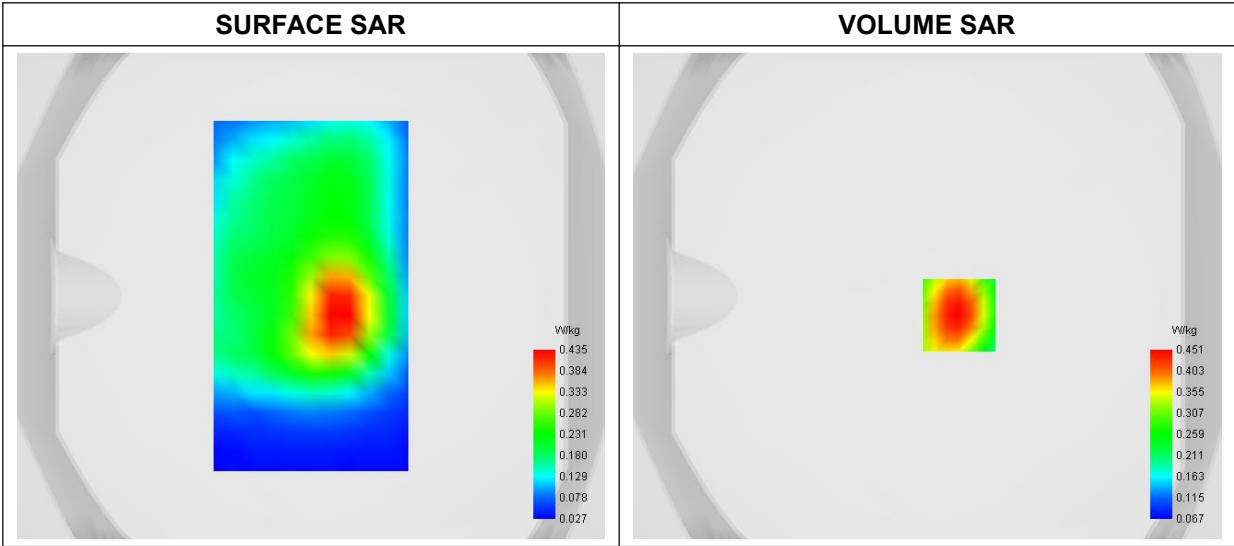


Maximum location: X=13.00, Y=-8.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.259279
SAR 1g (W/Kg)	0.424820

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6709	0.4515	0.3043	0.2104	0.1515

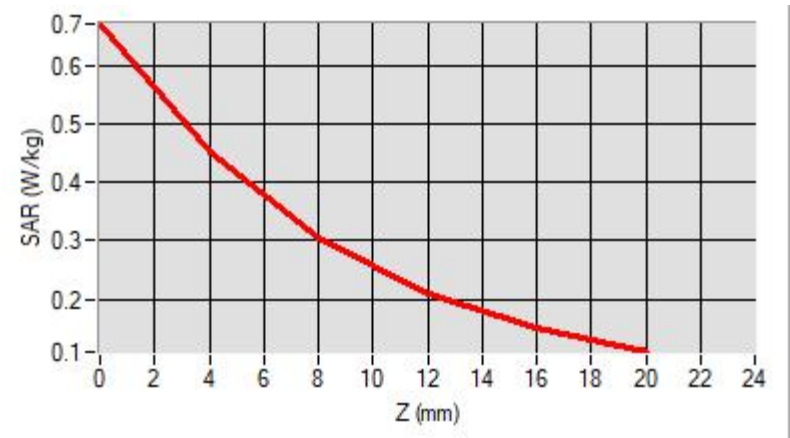

F. 3D Image

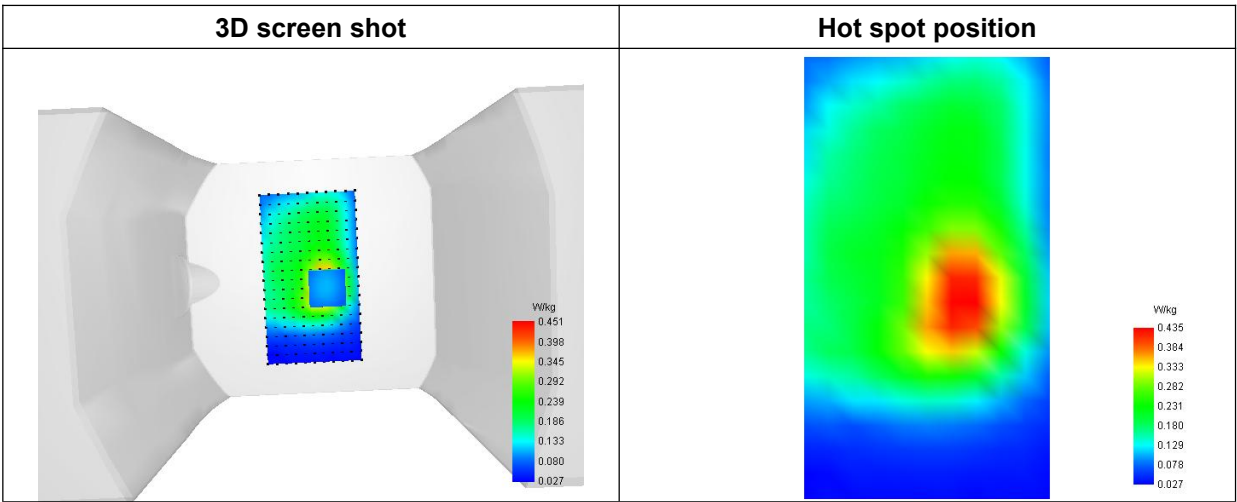

MEASUREMENT 33

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	FDD-LTE Band 4_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.281207
Conductivity (S/m)	1.373485
Power Variation (%)	-0.581700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

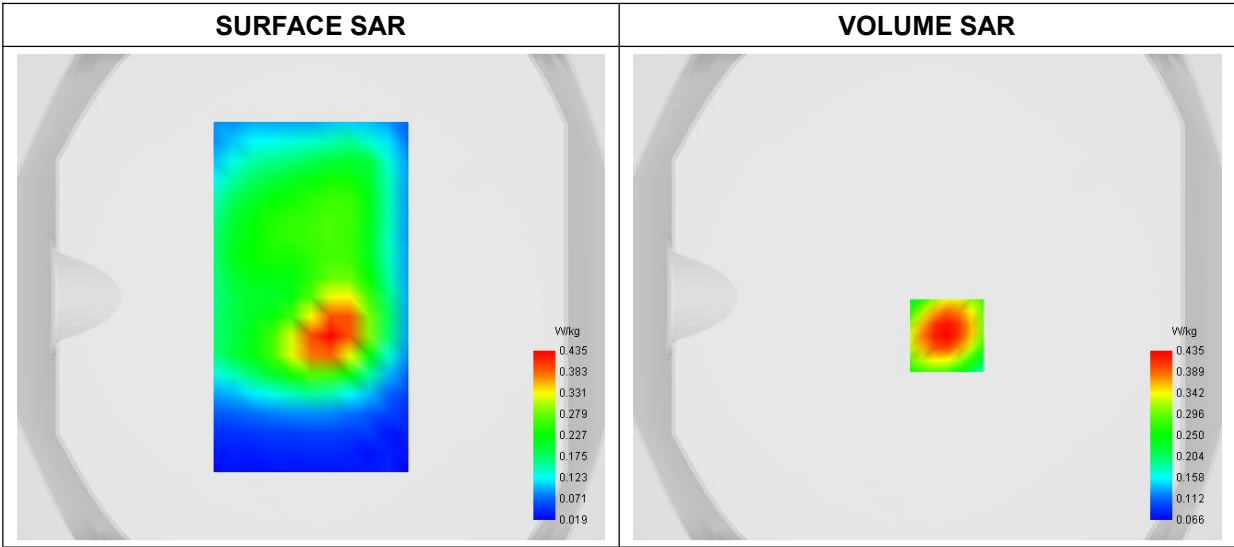


Maximum location: X=8.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.255365
SAR 1g (W/Kg)	0.408878

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6141	0.4347	0.3078	0.2212	0.1625

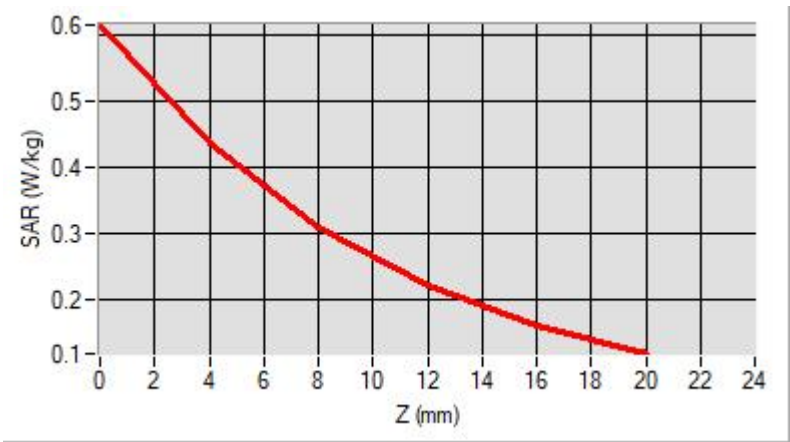

F. 3D Image

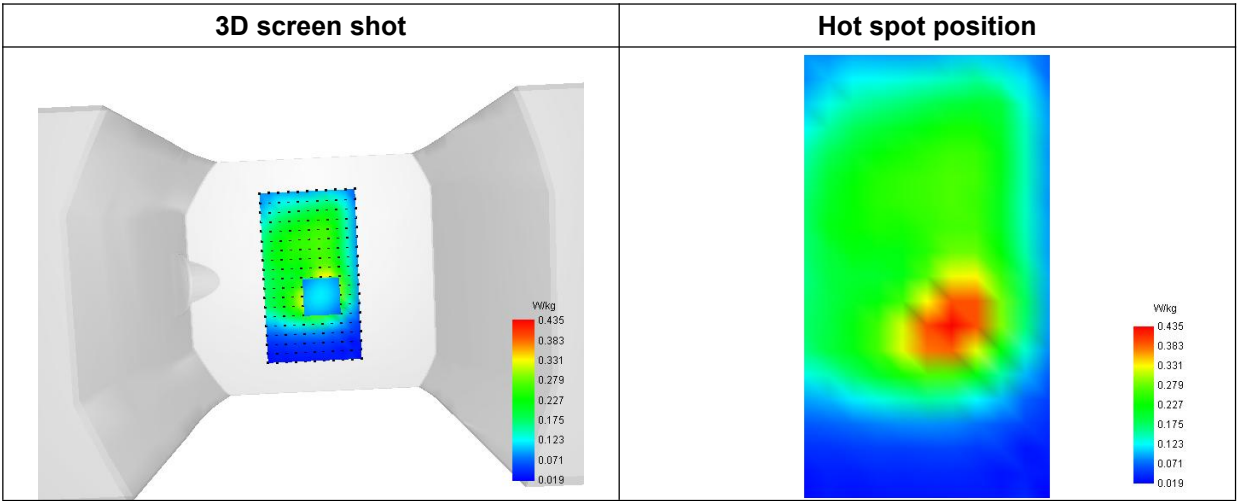

MEASUREMENT 34

Type: Measurement (Complete)
Date of measurement: 2024-07-17
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.71; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	FDD-LTE Band 5_QPSK, 10MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	829.000000
Relative Permittivity (real part)	42.311862
Conductivity (S/m)	0.862012
Power Variation (%)	-0.515200
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

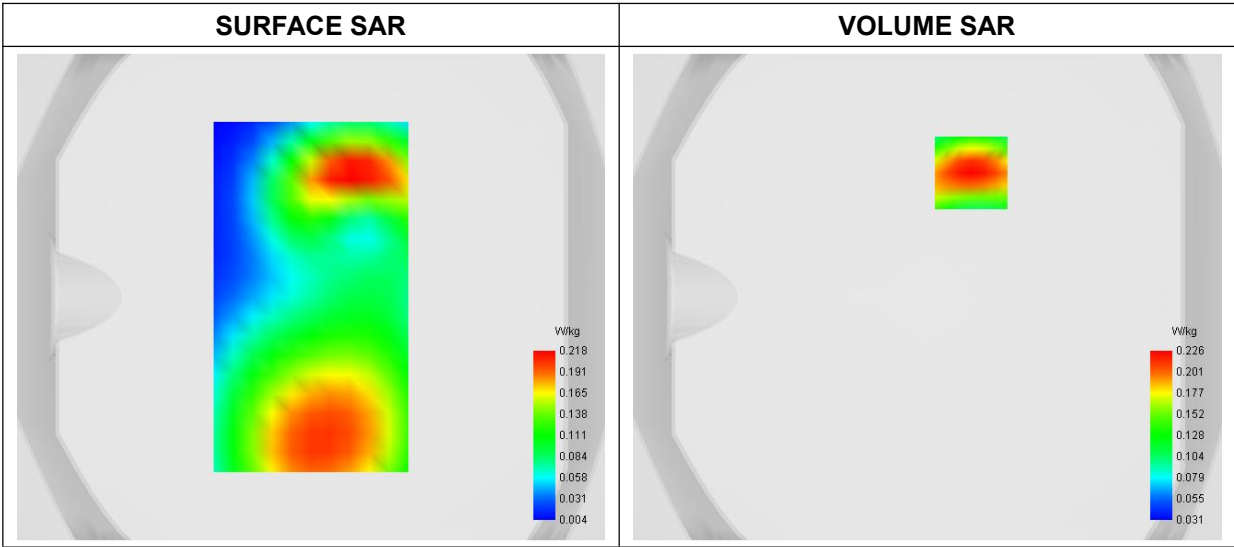


Maximum location: X=18.00, Y=51.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.128135
SAR 1g (W/Kg)	0.210429

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3249	0.2255	0.1561	0.1093	0.0781

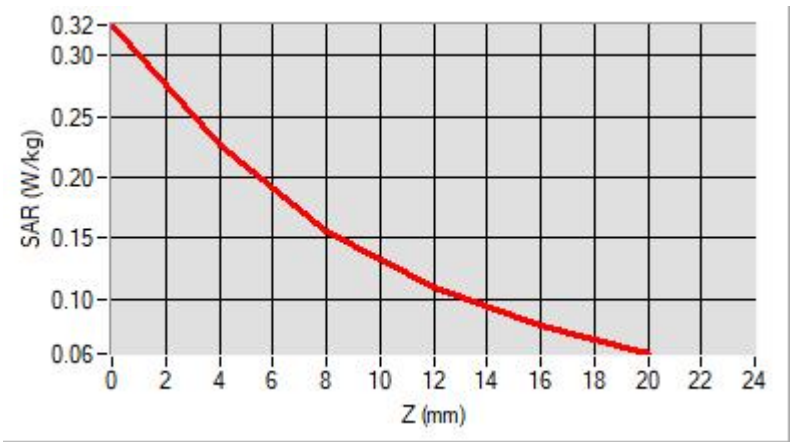

F. 3D Image

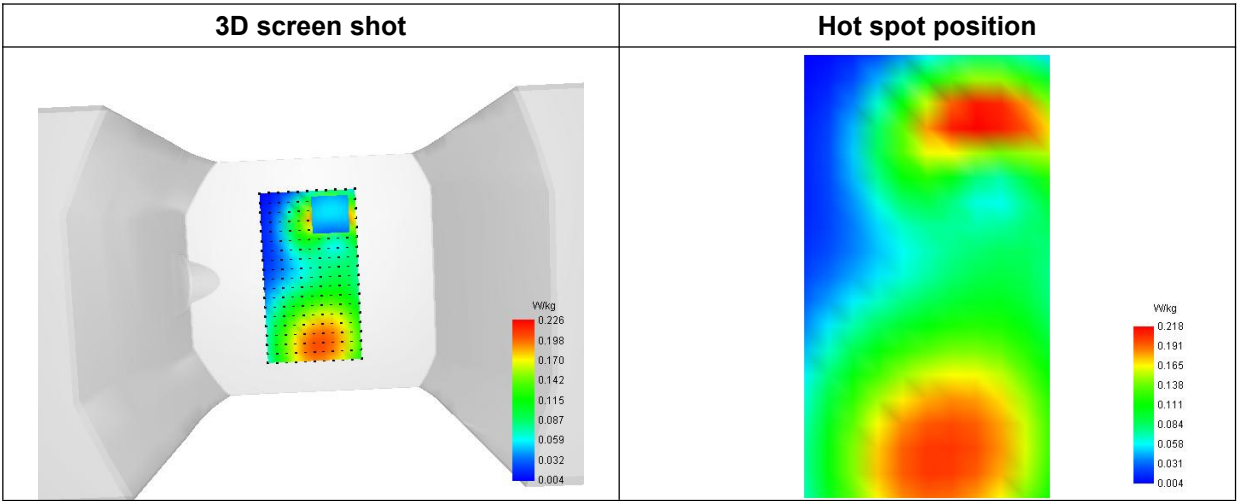

MEASUREMENT 35

Type: Measurement (Complete)
Date of measurement: 2024-07-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.22; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	FDD-LTE Band 7_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	2510.000000
Relative Permittivity (real part)	38.772353
Conductivity (S/m)	1.924857
Power Variation (%)	-1.541700
Ambient Temperature	22.6
Liquid Temperature	22.6

C. SAR Surface and Volume

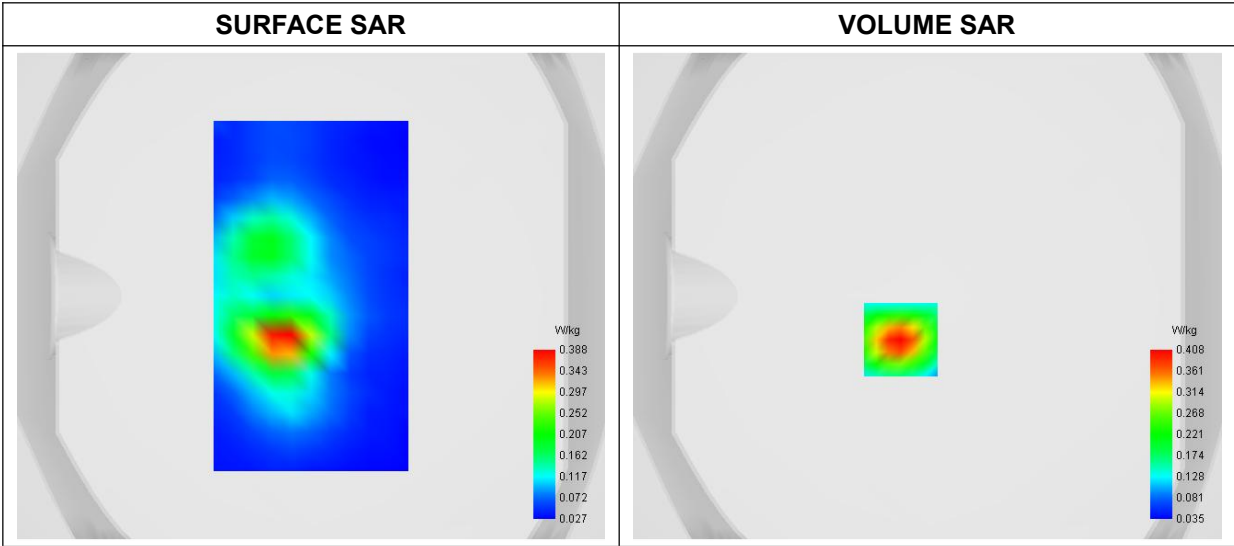


Maximum location: X=-11.00, Y=-18.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.185721
SAR 1g (W/Kg)	0.369992

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.6989	0.4076	0.2331	0.1365	0.0854

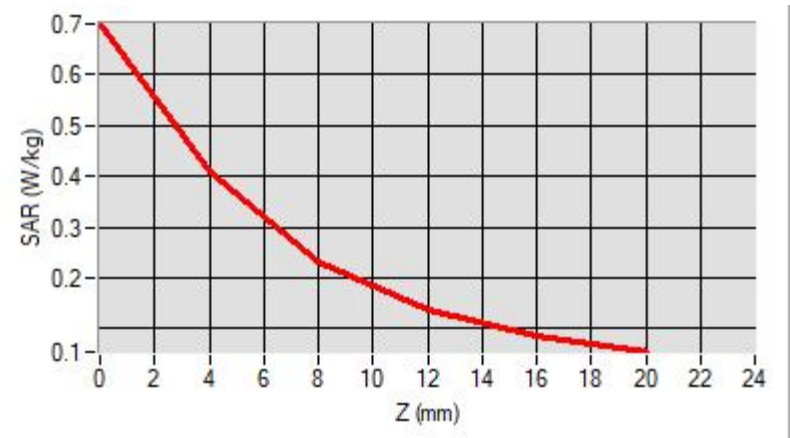

F. 3D Image

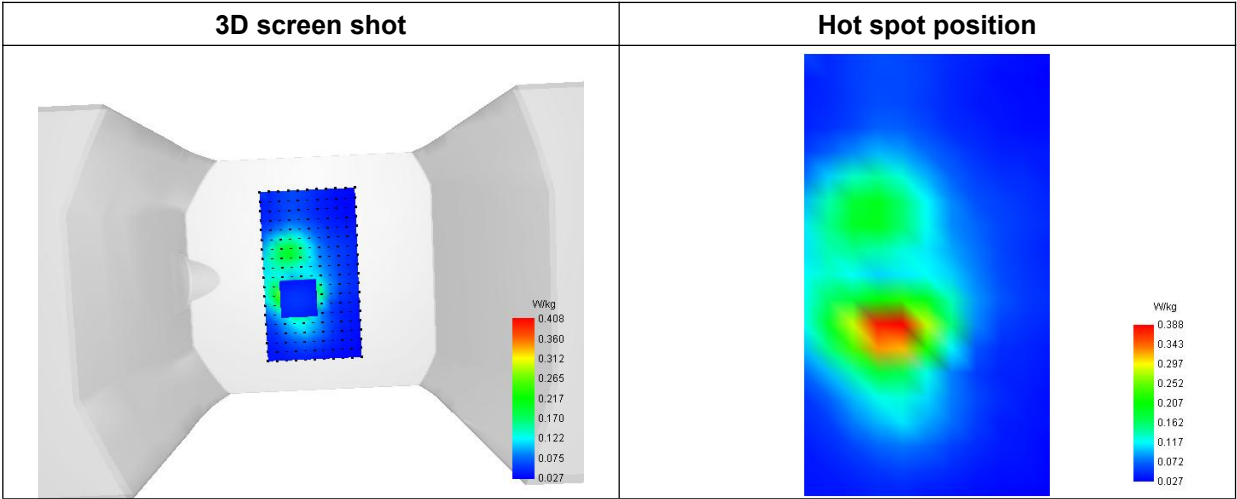

MEASUREMENT 36

Type: Measurement (Complete)
Date of measurement: 2024-07-15
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	FDD-LTE Band 12_QPSK, 10MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	704.000000
Relative Permittivity (real part)	42.342353
Conductivity (S/m)	0.854571
Power Variation (%)	-1.221700
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

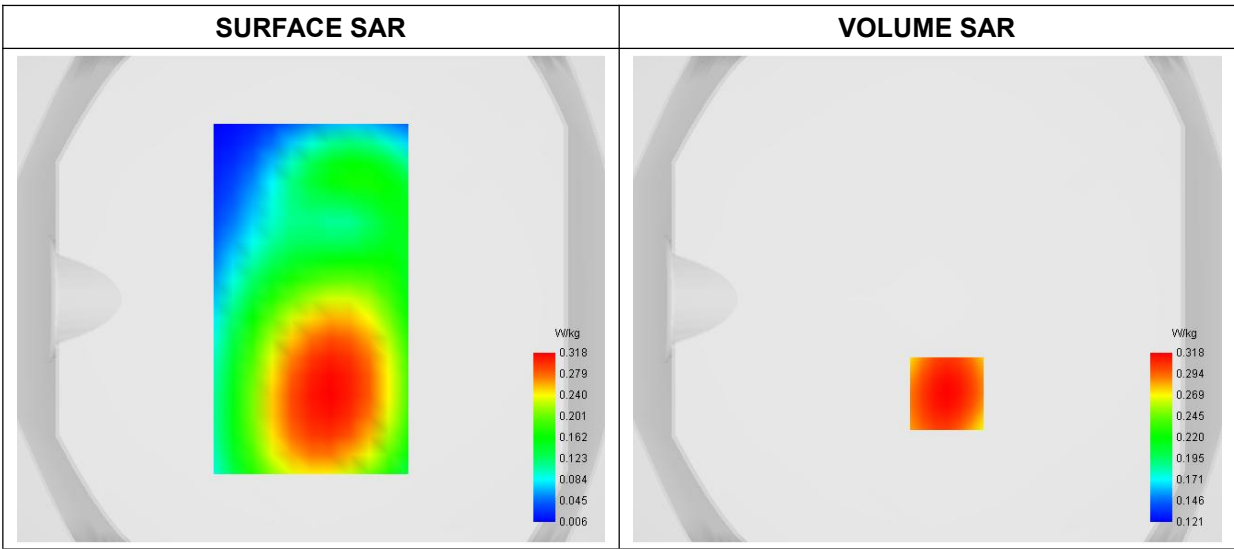


Maximum location: X=8.00, Y=-39.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.234905
SAR 1g (W/Kg)	0.307764

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3852	0.3185	0.2633	0.2183	0.1815

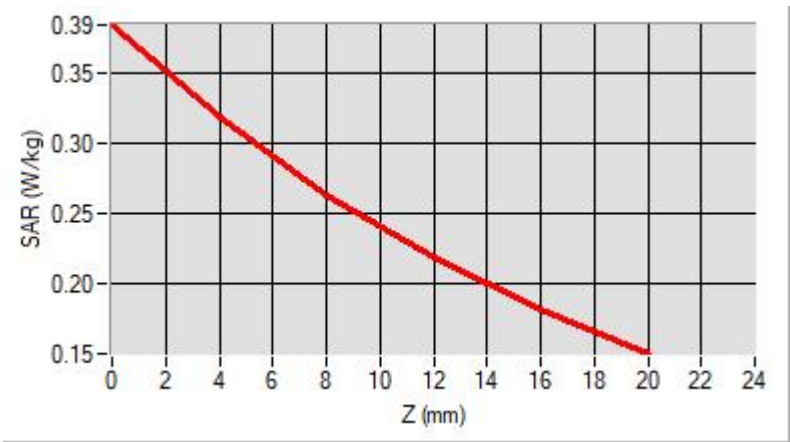

F. 3D Image

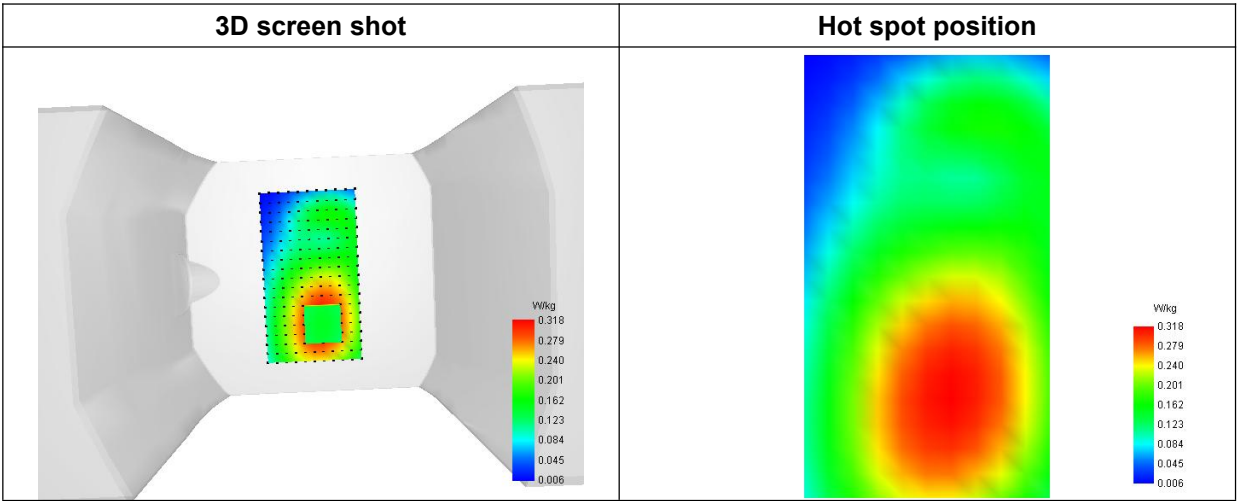

MEASUREMENT 37

Type: Measurement (Complete)
Date of measurement: 2024-07-15
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 1.67; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	FDD-LTE Band 13_QPSK, 10MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	782.000000
Relative Permittivity (real part)	42.342178
Conductivity (S/m)	0.850311
Power Variation (%)	-1.111400
Ambient Temperature	22.5
Liquid Temperature	22.5

C. SAR Surface and Volume

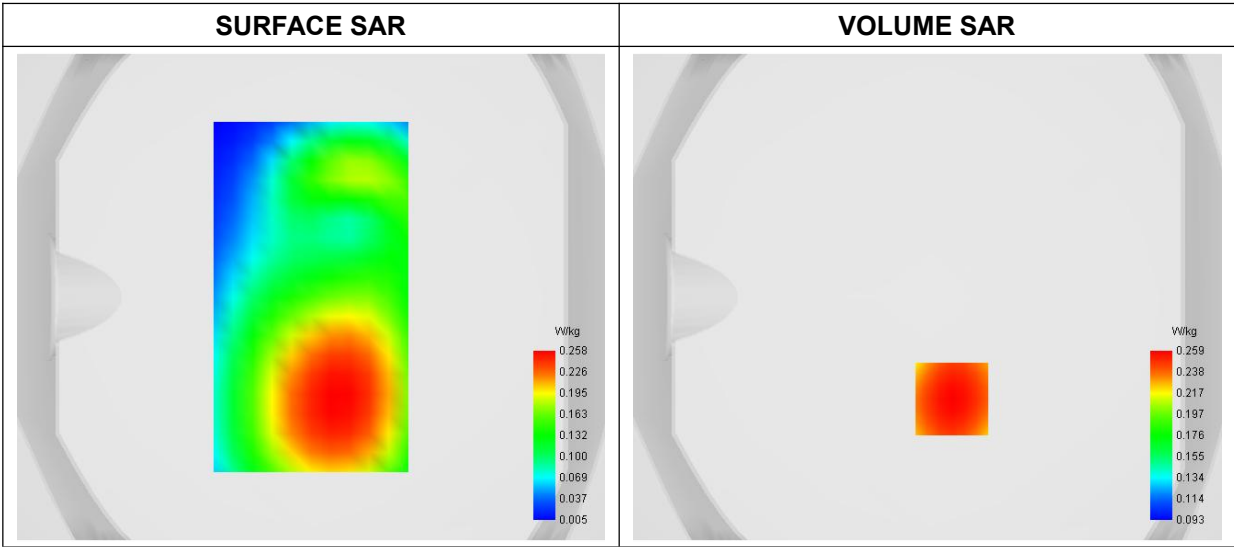


Maximum location: X=10.00, Y=-42.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.188301
SAR 1g (W/Kg)	0.250109

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3163	0.2589	0.2118	0.1736	0.1425

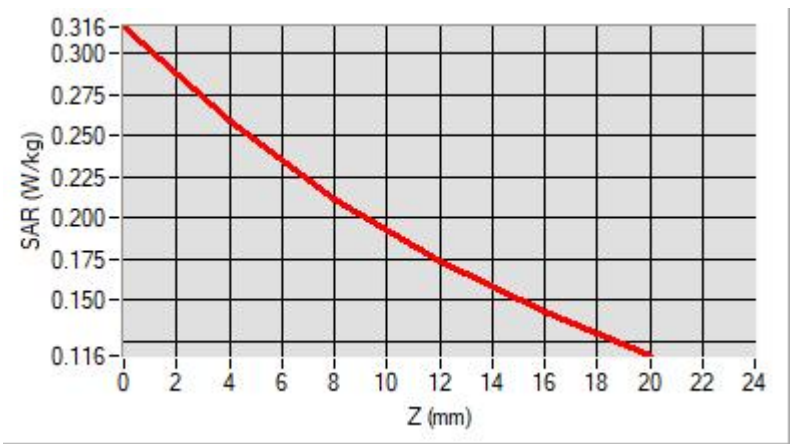

F. 3D Image

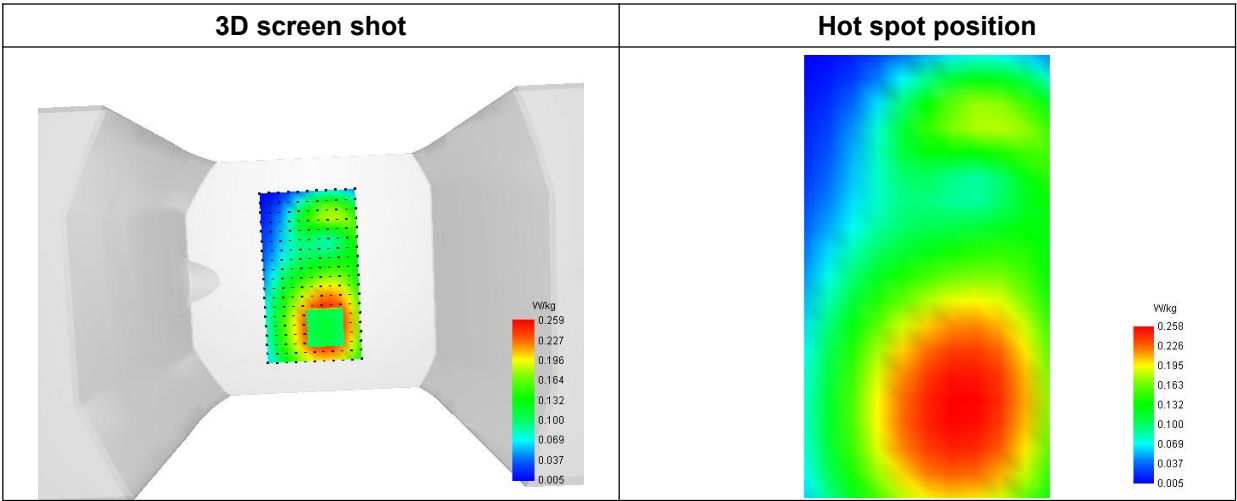

MEASUREMENT 38

Type: Measurement (Complete)
Date of measurement: 2024-07-23
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.11; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Front
Band	FDD-LTE Band 66_QPSK, 20MHz
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.281207
Conductivity (S/m)	1.373485
Power Variation (%)	0.151700
Ambient Temperature	22.2
Liquid Temperature	22.2

C. SAR Surface and Volume

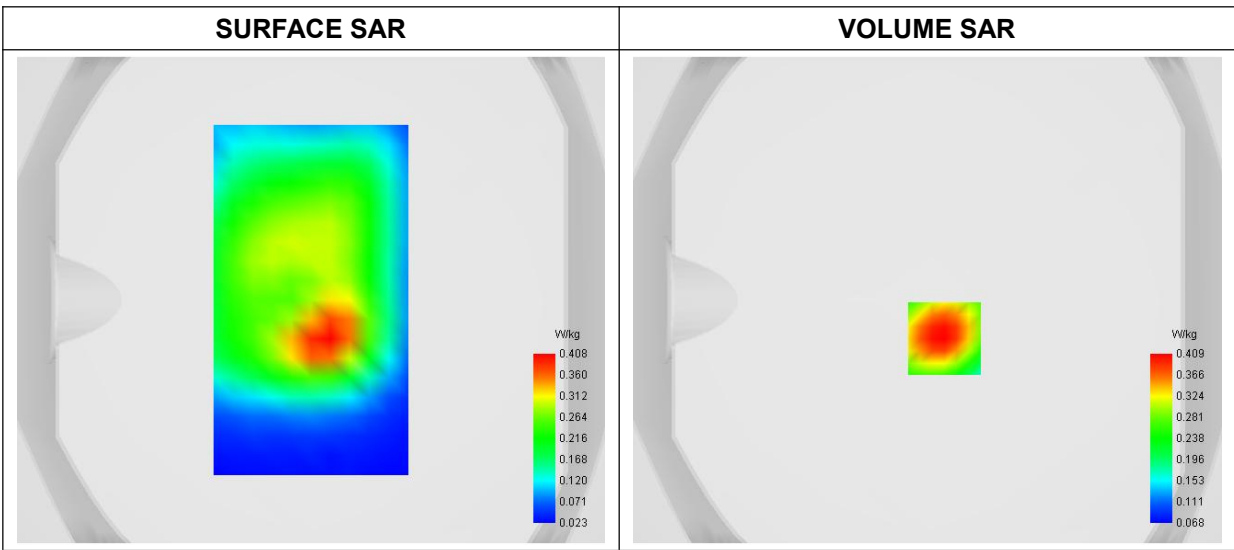


Maximum location: X=7.00, Y=-16.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243433
SAR 1g (W/Kg)	0.386261

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.5806	0.4086	0.2884	0.2078	0.1542

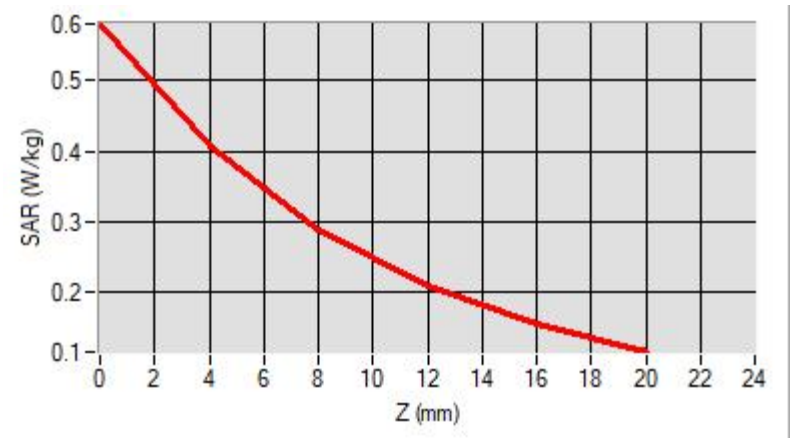

F. 3D Image

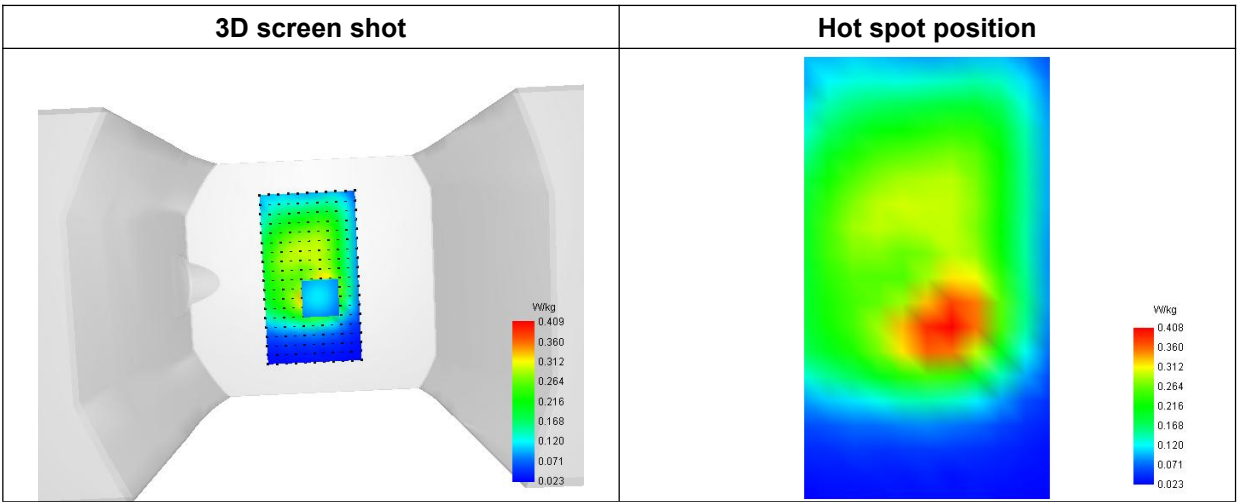

MEASUREMENT 39

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	NR n78_3450-3550MHz _DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.0000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	-0.425700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

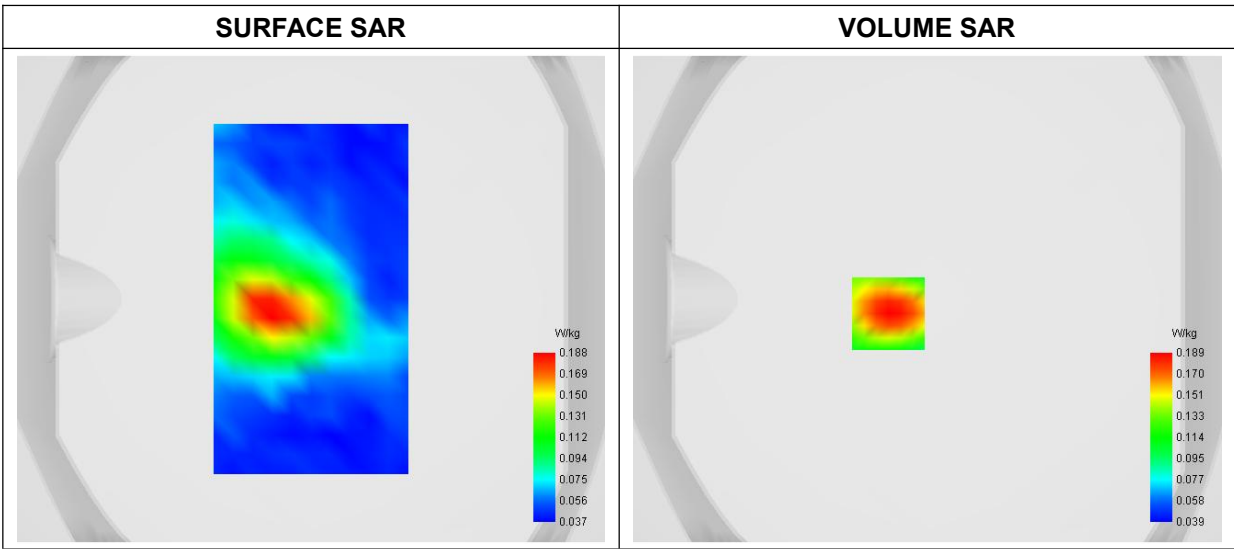


Maximum location: X=-16.00, Y=-6.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.105702
SAR 1g (W/Kg)	0.182216

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.3612	0.1886	0.0992	0.0611	0.0499

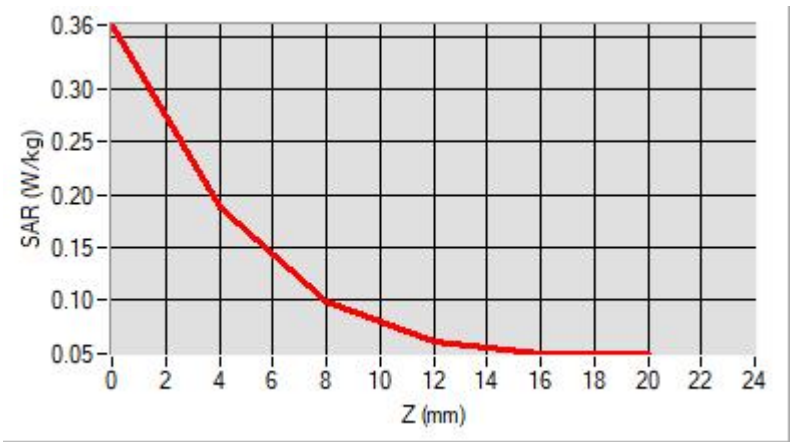

F. 3D Image

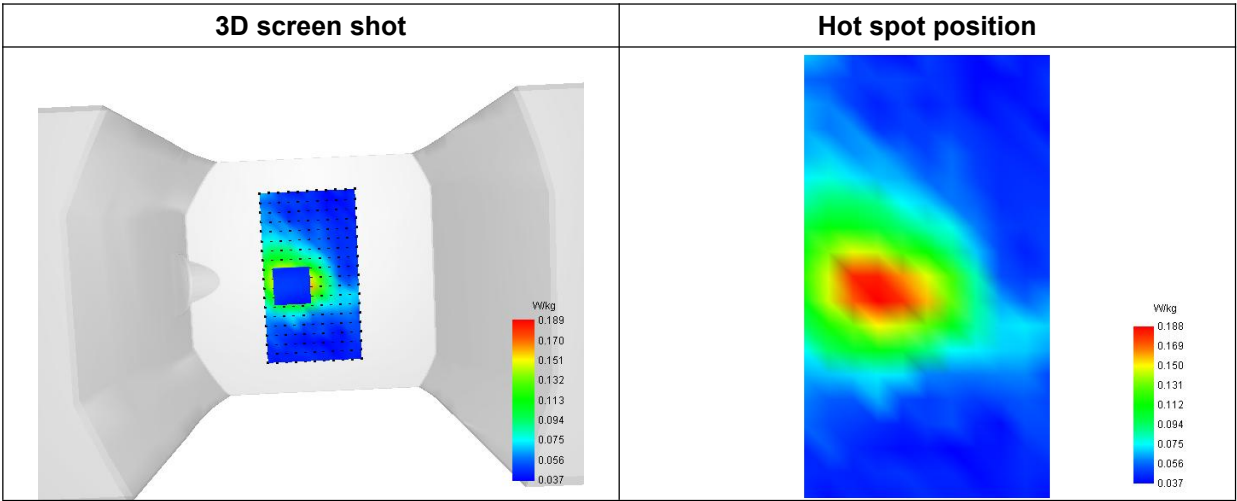

MEASUREMENT 40

Type: Measurement (Complete)
Date of measurement: 2024-07-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	NR n78_3700-3800MHz _DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative Permittivity (real part)	35.524623
Conductivity (S/m)	3.314571
Power Variation (%)	1.651700
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

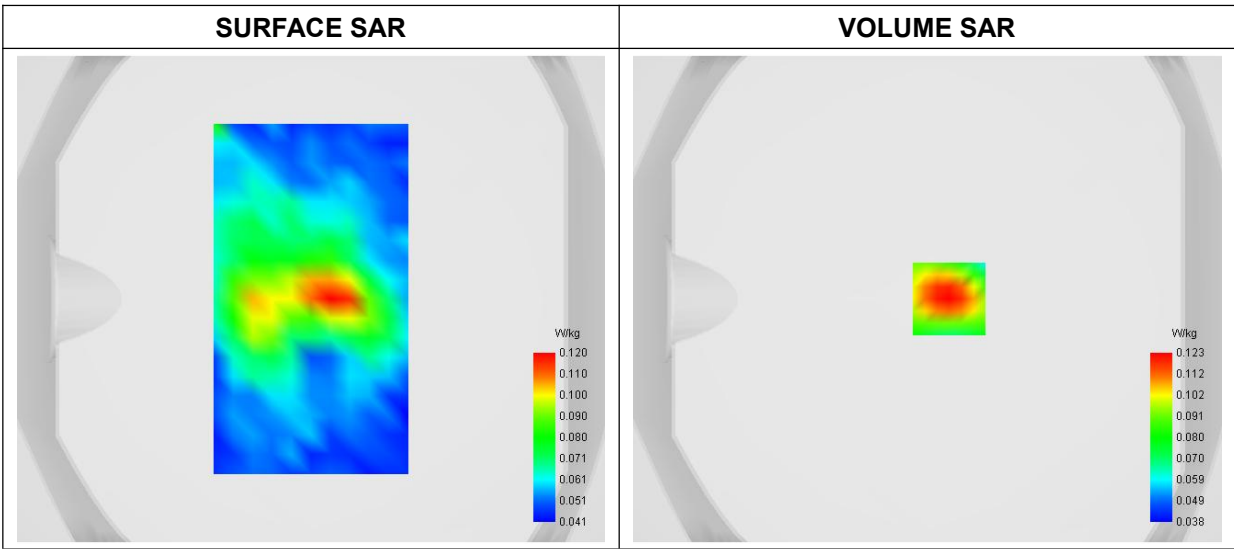


Maximum location: X=9.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.077153
SAR 1g (W/Kg)	0.117319

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2056	0.1227	0.0767	0.0559	0.0504

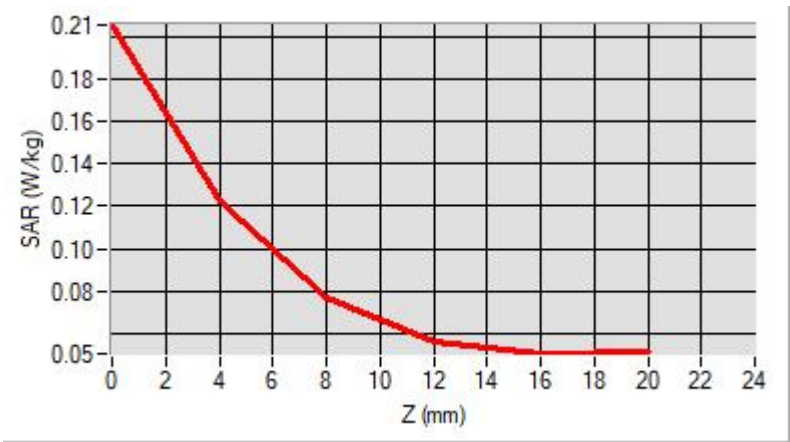

F. 3D Image

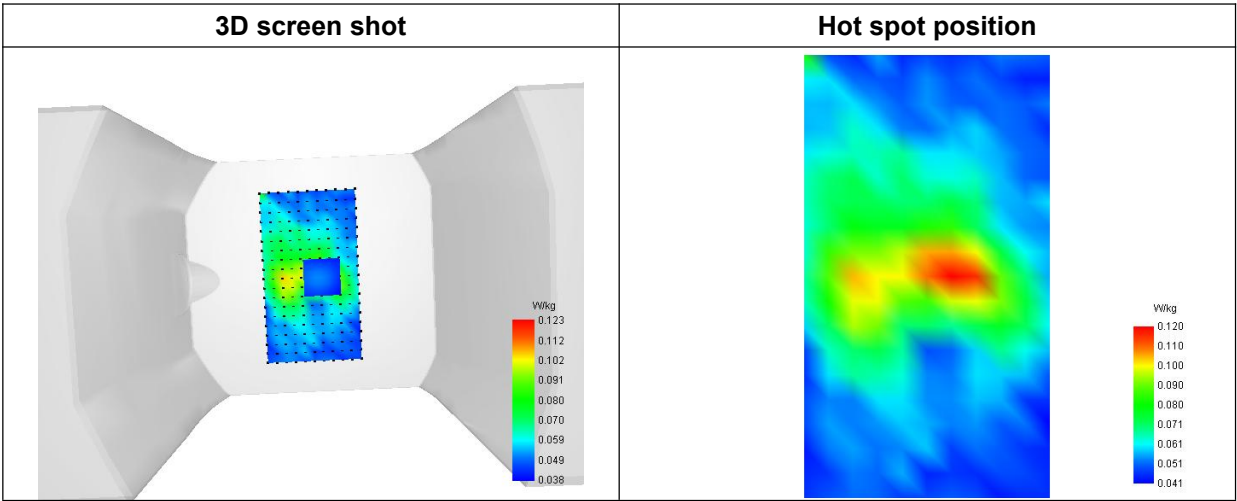

MEASUREMENT 41

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	DC_2A_n78A_3450-3550MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	1.861800
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

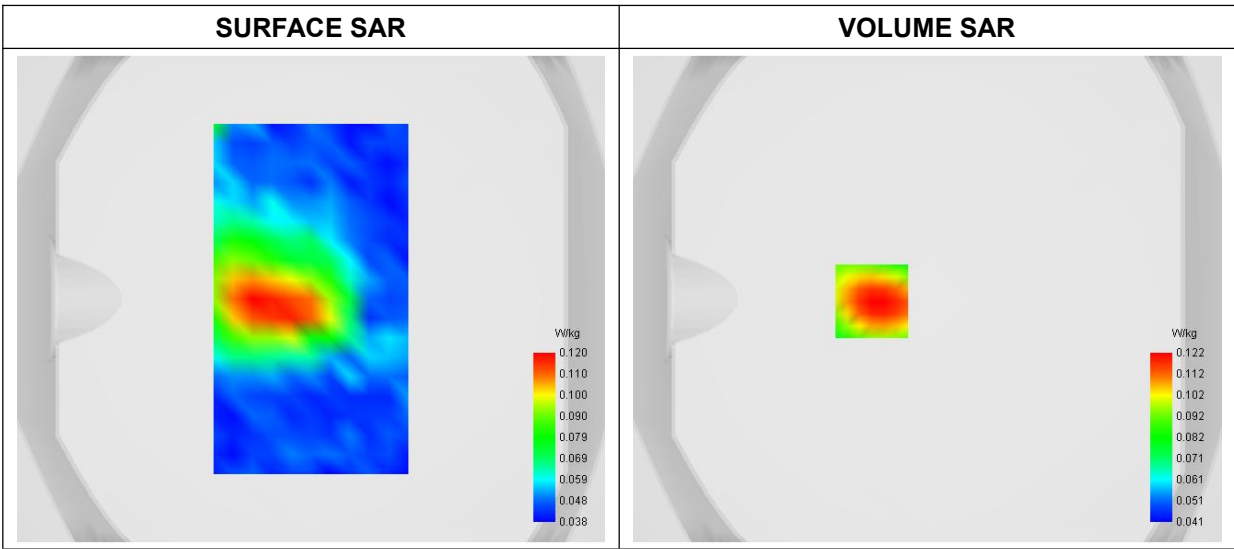


Maximum location: X=-23.00, Y=-1.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.075698
SAR 1g (W/Kg)	0.118522

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2236	0.1220	0.0697	0.0479	0.0424

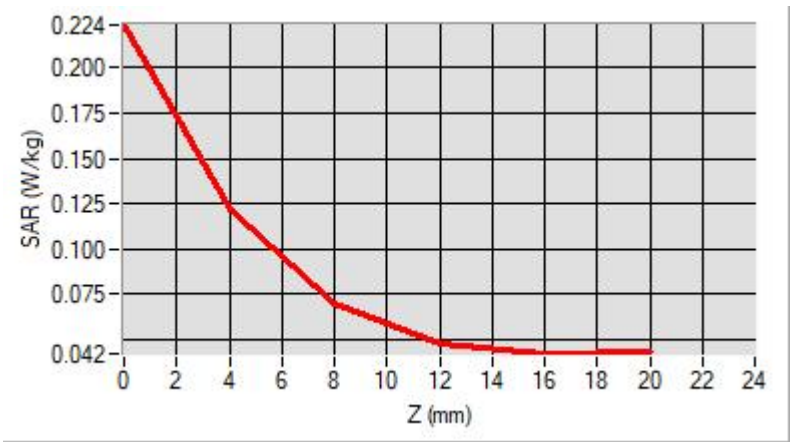

F. 3D Image

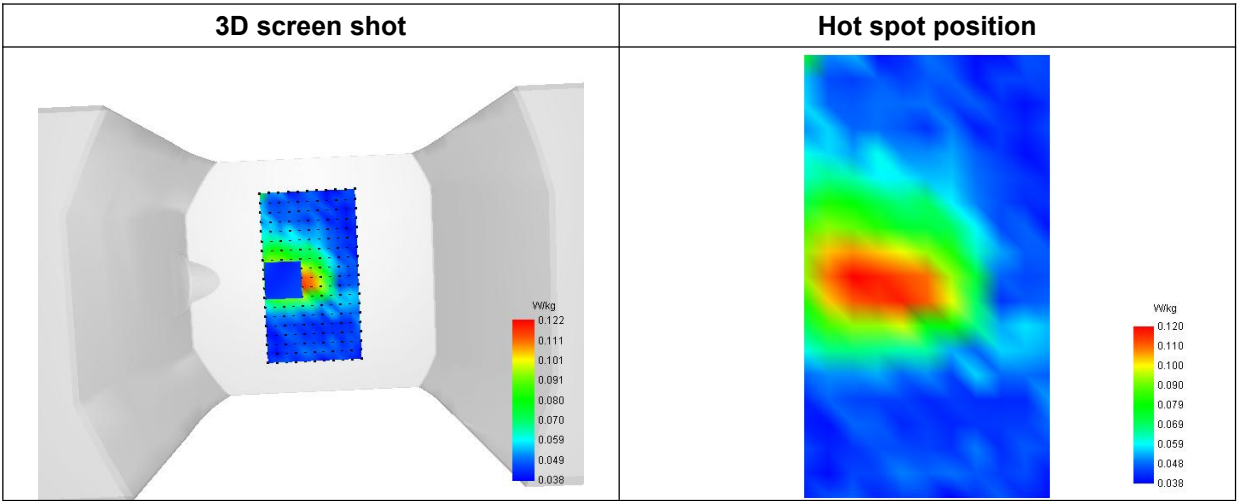

MEASUREMENT 42

Type: Measurement (Complete)
Date of measurement: 2024-07-31
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.27; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	DC_2A_n78A_3700-3800MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3750.000000
Relative Permittivity (real part)	35.524623
Conductivity (S/m)	3.314571
Power Variation (%)	1.861800
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

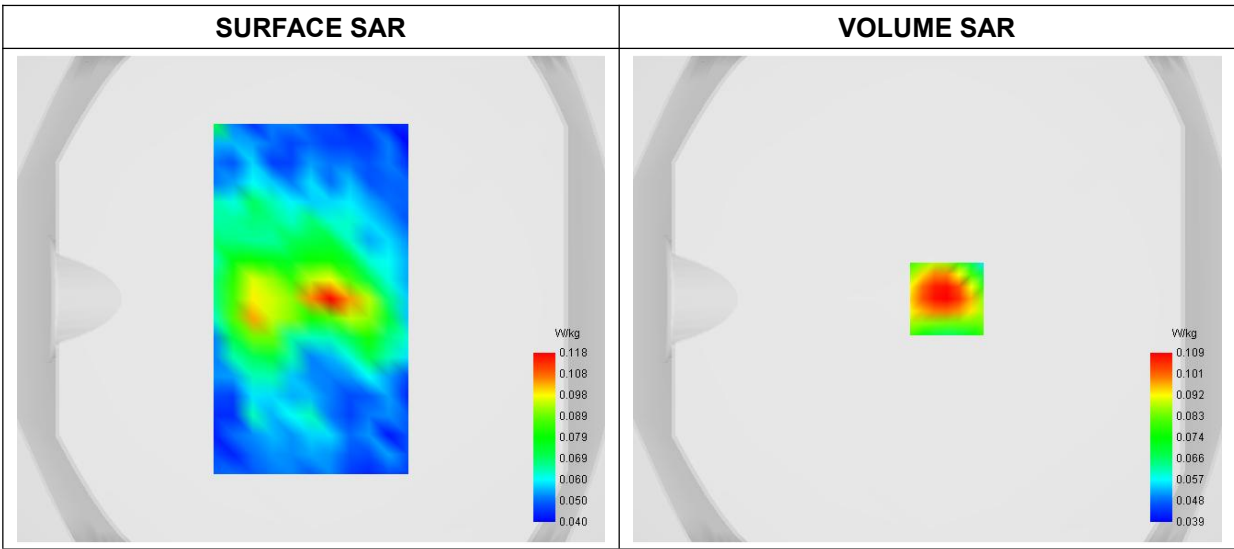


Maximum location: X=8.00, Y=0.00
D. SAR 1g & 10g


SAR 10g (W/Kg)	0.071852
SAR 1g (W/Kg)	0.105668

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.1768	0.1095	0.0713	0.0538	0.0490

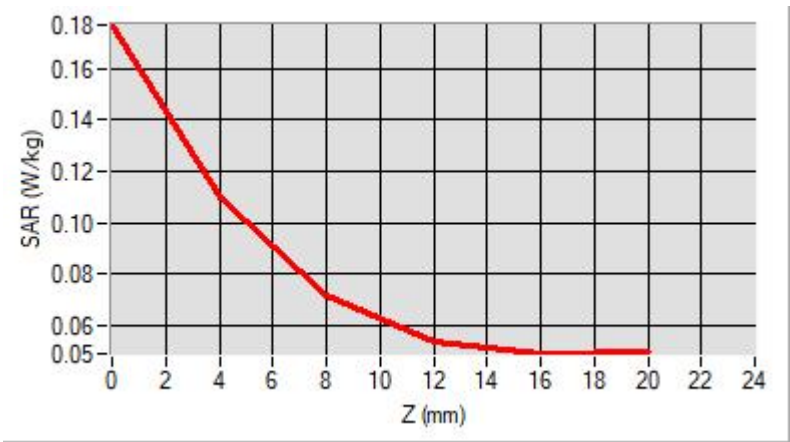

F. 3D Image

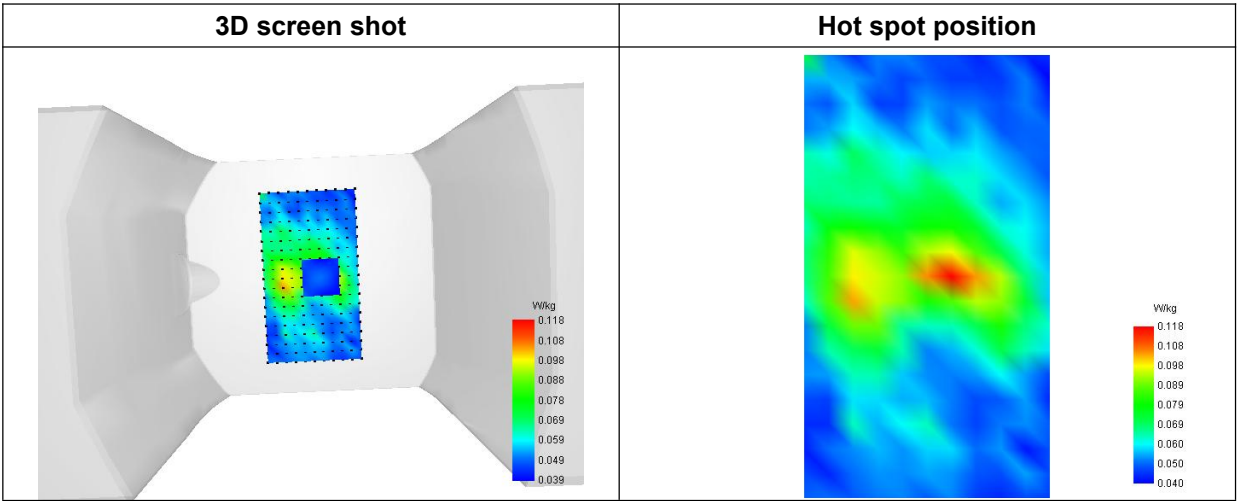

MEASUREMENT 43

Type: Measurement (Complete)
Date of measurement: 2024-07-30
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 18/21 EPGO356; ConvF: 2.07; Calibrated: 2024-06-07


A. Experimental conditions

Area Scan	dx=8mm dy=8mm
Zoom Scan	dx=5mm dy=5mm dz=4mm
Phantom	Flat Plane
Device Position	Back
Band	DC_7A_n78A_3450-3550MHz _ DFT-s-OFDM QPSK 100MHz
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	3500.000000
Relative Permittivity (real part)	36.921735
Conductivity (S/m)	3.051812
Power Variation (%)	1.861800
Ambient Temperature	22.4
Liquid Temperature	22.4

C. SAR Surface and Volume

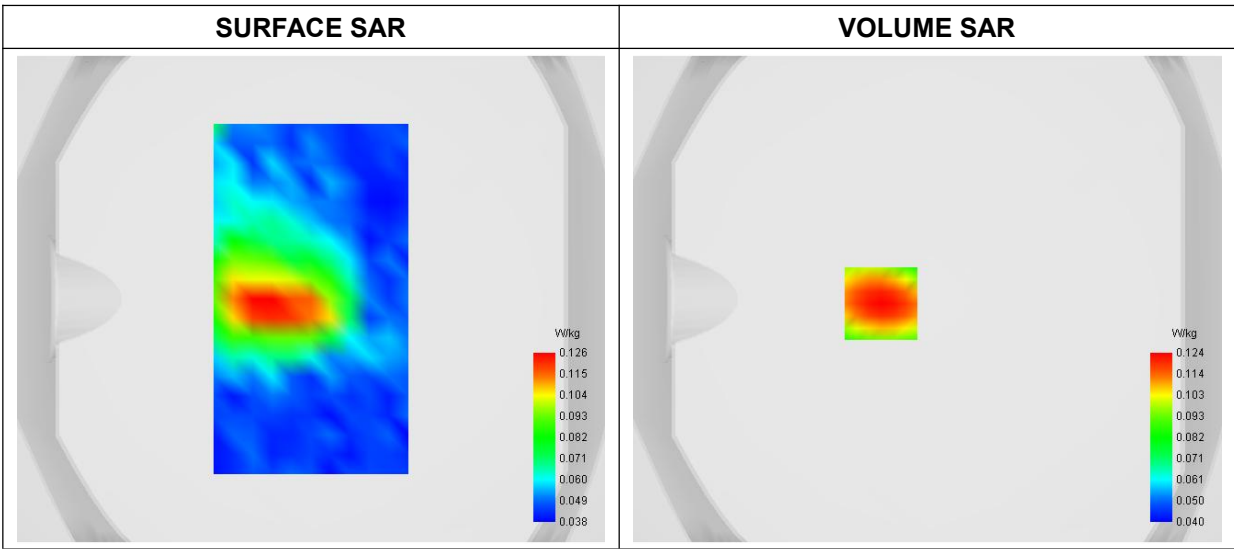


Maximum location: X=-19.00, Y=-2.00
D. SAR 1g & 10g

SAR 10g (W/Kg)	0.079091
SAR 1g (W/Kg)	0.119850

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	0.2048	0.1244	0.0785	0.0564	0.0485

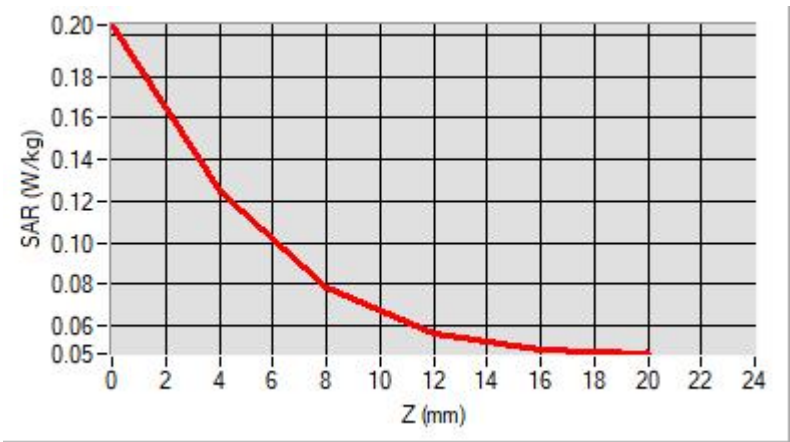

F. 3D Image

