

FCC Test Report

Report No.: AGC00688180701FE03

FCC ID : 2AMSUMABTBL120

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Bluetooth Mouse

BRAND NAME : SANWA

MODEL NAME : GMABTBL120

CLIENT : SANWA LIMITED

DATE OF ISSUE : July 16, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 54

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	A Land Control of the	July 16, 2018	Valid	Initial release

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5 5
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS	8 8
6. TEST FACILITY	10
7. TEST METHOD	
8. TEST EQUIPMENT LIST	11
9. RADIATED EMISSION	12
9.1. TEST LIMIT	12 13
10. BAND EDGE EMISSION	36
10.1. MEASUREMENT PROCEDURE 10.2 TEST SETUP 10.3 RADIATED TEST RESULT	36
11. 20DB BANDWIDTH	41
11.1. MEASUREMENT PROCEDURE	41 41
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	45 45
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	46
APPENDIX B. PHOTOGRAPHS OF FUT	48

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



age 4 of 54

1. VERIFICATION OF CONFORMITY

Applicant	SANWA LIMITED
Address	Room 1005, 10/F., Tower 2, Silvercord, 30 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer	Wuhu Delux Mobile Internet Device Company Limited
Address	Delux Industrial Park, Xici 3 Road, Xinwu Development Zone, Wanzhi Town, Wuhu County, Anhui Province, China
Product Designation	Bluetooth Mouse
Brand Name	SANWA
Test Model	GMABTBL120
Date of test	July 09, 2018 to July 15, 2018
Deviation	None
Condition of Test Sample	Normal State of the Control of the C
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

	Honry Zhan	q
Tested By		
	Henry Zhang(Zhang Zhuorui)	July 15, 2018
	and change	
Reviewed By	1 0	
	Cool Cheng(Cheng Mengguo)	July 16, 2018
	Forverto ce	
Approved By		T TO THE
	Forrest Lei(Lei Yonggang) Authorized Officer	July 16, 2018

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 54

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

KA CO.	
Operation Frequency	2.402 GHz to 2.480GHz
Bluetooth Version	V3.0
Modulation	BR ⊠GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK
Number of channels	79
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	2dBi
Power Supply	DC 1.5V by battery

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Channel Number	Frequency		
The transfer of the transfer o	orde O State and order O O State and order O	2402MHz		
Management of Cotton (Cotton)	CO NO	2403MHz		
G		The Condition Of the Co		
The fill of the fi	38	2440 MHz		
2400~2483.5MHz	39	2441 MHz		
CC " CC	40	2442 MHz		
粮.	The Standard Common			
The Committee @ Manufacture Committee	© ####################################	2479 MHz		
accional Ca C America	78	2480 MHz		

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.



Page 6 of 54

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION			
1 The Marianes	Low channel GFSK			
© 2 do 00 m	Middle channel GFSK			
3 60	High channel GFSK			
4	BT Link(Hopping mode)			


Note:

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

The results spowfil this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

^{1.} All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.



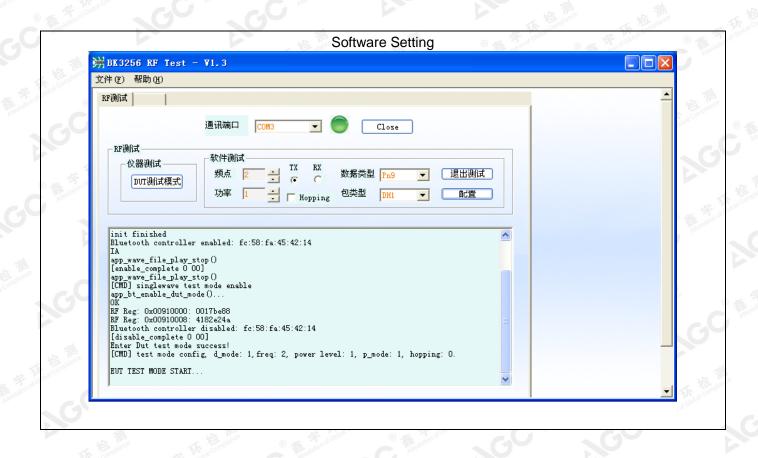

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.agc-gett.com.



Page 8 of 54

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

EUT

Configure 2: (Control continuous TX)

			KEL.	
EUT	station o	Control box	Da.	PC

5.2. EQUIPMENT USED IN EUT SYSTEM

Item Equipment 1 Bluetooth Mouse		Mfr/Brand	Model/Type No.	Remark EUT	
		SANWA	GMABTBL120		
2	Battery	Nanfu	LR03-12	A.E	
3	PC ®	APPLE	A1465	A.E	
4	Control box	BEKEN	N/A	A.E	
5	USB Cable	N/A	1m unshielded	A.E	
6	Mobile phone	APPLE	8 Plus	A.E	

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.



Page 9 of 54

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT		
§15.249(a) §15.209	Radiated Emission	Compliant		
§15.249(d)	Band Edges	Compliant		
§15.207	Conduction Emission	N/A		
§15.215	Bandwidth	Compliant		

Note: N/A means it's not applicable to this item.

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 10 of 54

6. TEST FACILITY

Par.	
Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.



age 11 of 54

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2018	Jun.19, 2019
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2018	Jun.19, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Radiation Cable 1	MXT	RS1	R005	N/A	N/A
Radiation Cable 2	MXT	RS1	R006	N/A	N/A
Loop Antenna	A.H.Systems,Inc	SAS-562B	station of Country	Mar. 01, 2018	Feb. 28, 2019
Filter (2.4-2.483GHz)	Micro-tronics	087		Jun.20, 2018	Jun.19, 2019

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 12 of 54

9. RADIATED EMISSION

9.1. TEST LIMIT

Standard FCC15.249

Fundamental	Field Strength of Fundamental	Field Strength of Harmonics
Frequency	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field St	rengths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	2
0.490 ~ 1.705	30	24000/F(kHz)	电测 乐意
1.705 ~ 30	30	30	See The second of the second o
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3 Maria Commission	Other:74.0 dB(µV)/m (Average)	(Peak) 54.0 dB(μV)/m

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 13 of 54

9.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 14 of 54

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.




9.3. TEST SETUP


RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHz

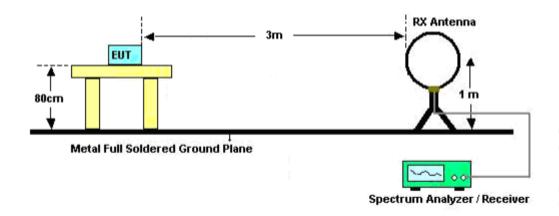

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

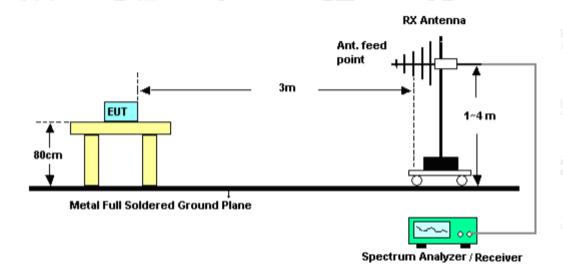


The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.





RADIATED EMISSION TEST SETUP ABOVE 1000MHz

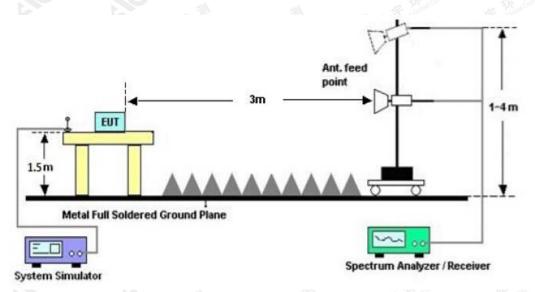

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 54


9.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

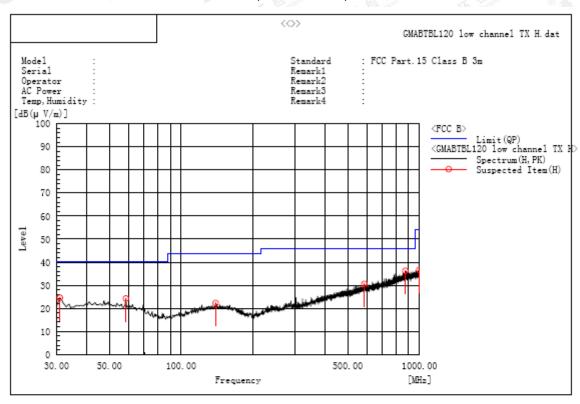

A. Suspected List:


	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	30.970	Н	9.0	15.6	24.6	40.0	15.4	Pass	100.0	14.8
	58.615	Н	7.9	16.4	24.3	40.0	15.7	Pass	100.0	268.5
	139.610	H	5.7	16.6	22.3	43.5	21.2	Pass	200.0	142.5
11001	587.265	Н	5.9	24.7	30.6	46.0	15.4	Pass	150.0	178.1
	872.445	Н	6.4	29.9	36.3	46.0	9.7	Pass	150.0	71.0
	997.575	Н	5.5	31.1	36.6	54.0	17.4	Pass	200.0	106.1

RESULT: PASS

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

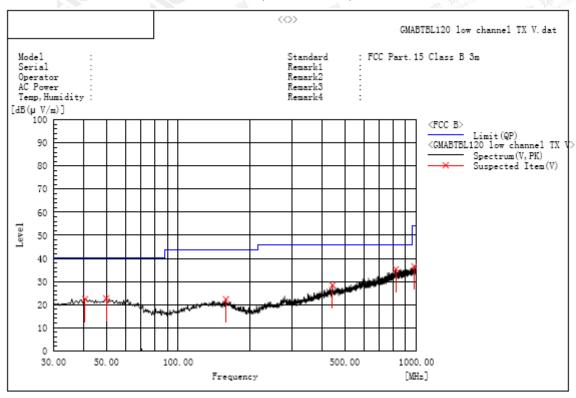

A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg	87
	40.670	V	5.0	17.4	22.4	40.0	17.6	Pass	200.0	91.5	A
	49.885	V	5.6	17.1	22.7	40.0	17.3	Pass	200.0	91.5	
Г	158.525	V	5.7	16.6	22.3	43.5	21.2	Pass	150.0	142.9	
Γ	444.190	V	6.4	22.0	28.4	46.0	17.6	Pass	150.0	179.3	
Γ	820.550	v	6.2	29.1	35.3	46.0	10.7	Pass	200.0	91.5	
	978.660	v	5.7	30.9	36.6	54.0	17.4	Pass	150.0	34.7	8

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

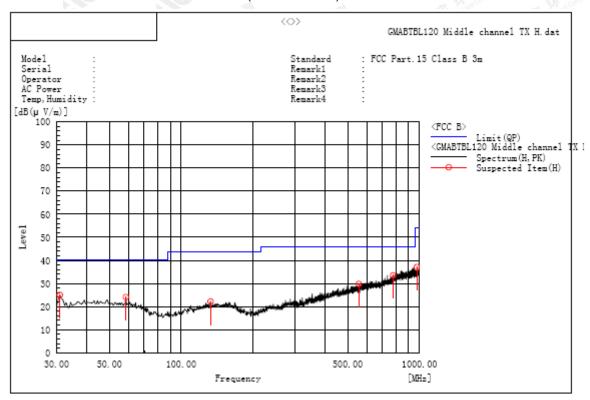

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
30.970	Н	9.4	15.6	25.0	40.0	15.0	Pass	150.0	216.3
58.615	Н	7.7	16.4	24.1	40.0	15.9	Pass	100.0	72.2
132.820	H	5.8	16.4	22.2	43.5	21.3	Pass	200.0	269.5
556.710	Н	5.8	24.0	29.8	46.0	16.2	Pass	100.0	72.2
775.445	Н	5.3	28.2	33.5	46.0	12.5	Pass	150.0	216.3
975.265	Н	6.2	30.9	37.1	54.0	16.9	Pass	150.0	252.1

RESULT: PASS

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL -VERTICAL

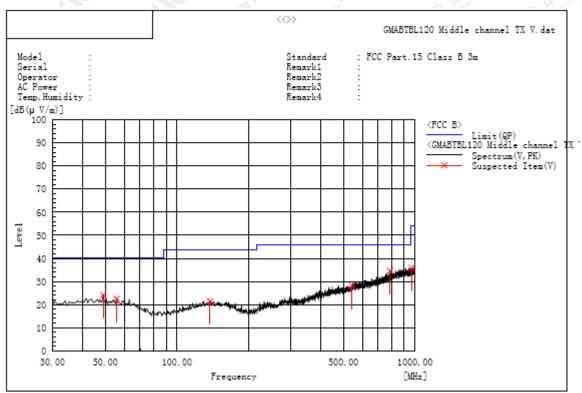

A. Suspected List:

	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	48.915	V	7.1	17.1	24.2	40.0	15.8	Pass	100.0	56.2
Г	55.705	V	5.9	16.6	22.5	40.0	17.5	Pass	100.0	56.2
	137.670	V	4.8	16.6	21.4	43.5	22.1	Pass	200.0	107.5
	544.100	V	4.5	23.7	28.2	46.0	17.8	Pass	100.0	92.6
3	784.660	V	6.2	28.4	34.6	46.0	11.4	Pass	150.0	252.8
	966.050	V	5.0	30.8	35.8	54.0	18.2	Pass	150.0	252.8

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

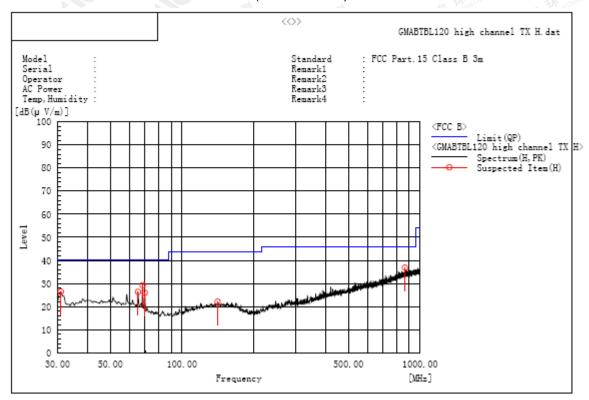


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
30.970	Н	10.9	15.6	26.5	40.0	13.5	Pass	100.0	185.8
65.405	Н	10.9	15.5	26.4	40.0	13.6	Pass	200.0	224.7
68.315	Н	14.4	14.9	29.3	40.0	10.7	Pass	100.0	224.7
69.770	Н	11.5	14.5	26.0	40.0	14.0	Pass	200.0	224.7
141.065	Н	5.5	16.6	22.1	43.5	21.4	Pass	150.0	184.8
863.715	Н	7.0	29.8	36.8	46.0	9.2	Pass	200.0	291.1


RESULT: PASS

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.





RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

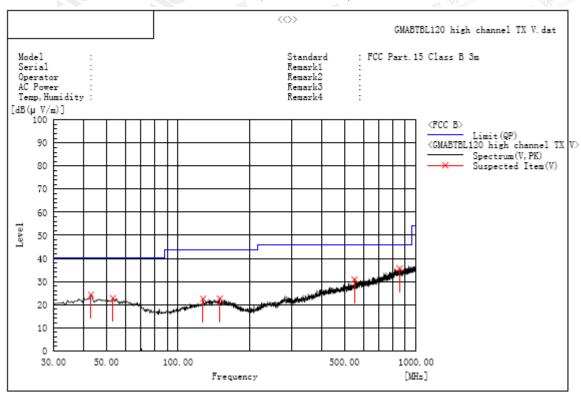

A. Suspected List:

3	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(u∨/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	43.095	V	6.9	17.4	24.3	40.0	15.7	Pass	100.0	56.9
	53.280	V	6.0	16.8	22.8	40.0	17.2	Pass	150.0	219.1
	127.485	V	6.5	16.0	22.5	43.5	21.0	Pass	100.0	58.0
	149.795	V	6.0	16.6	22.6	43.5	20.9	Pass	100.0	276.3
	550.890	v	7.0	23.9	30.9	46.0	15.1	Pass	200.0	208.4
	853.530	v	6.0	29.6	35.6	46.0	10.4	Pass	100.0	226.1

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




Page 23 of 54

RADIATED EMISSION ABOVE 1GHz

For Fundamental

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

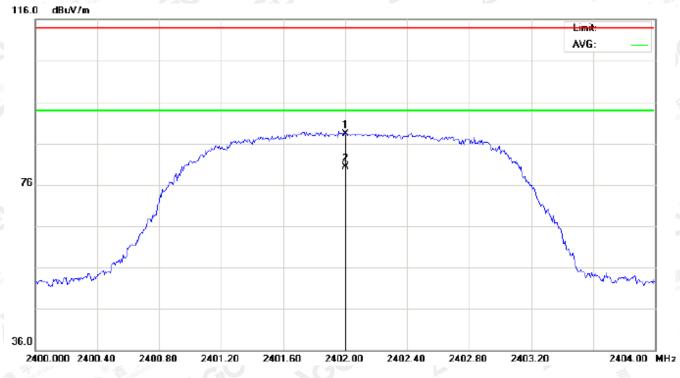

7.0												
313	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
	1		2402.000	77.99	10.32	88.31	114.00	-25.69	peak			
	2	*	2402.000	70.02	10.32	80.34	94.00	-13.66	AVG	100	130	


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 24 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

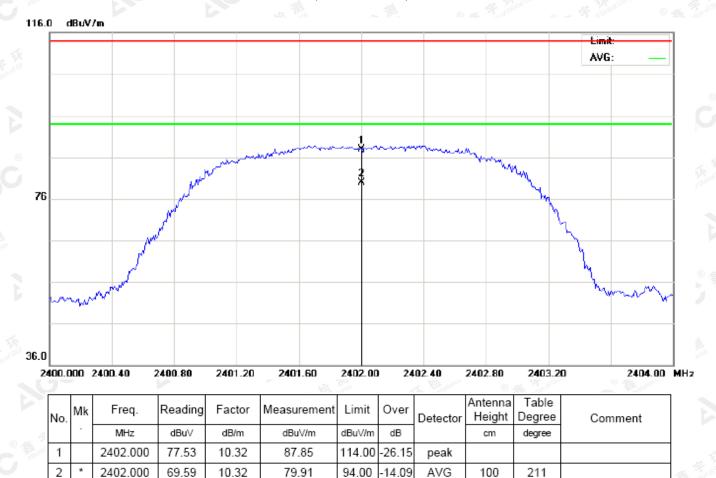


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 25 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

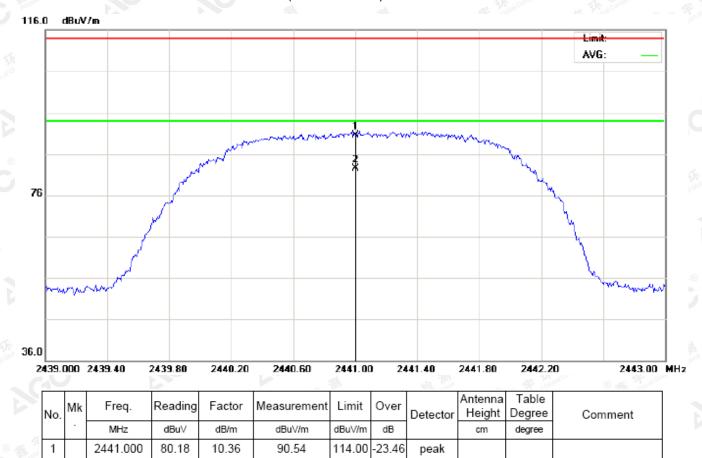

94.00

AVG

100

139

RESULT: PASS

2441.000

72.19

10.36


82.55

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 26 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

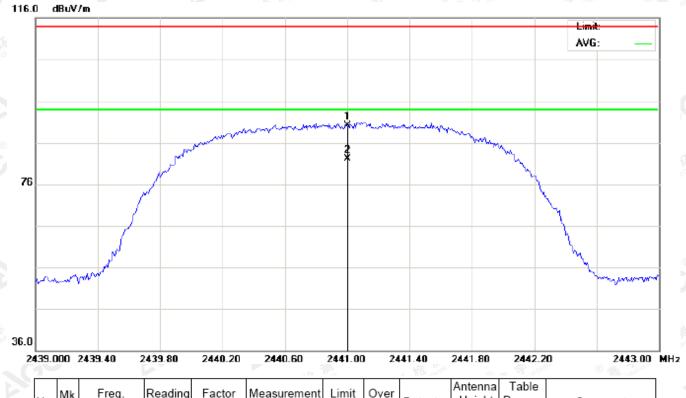

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	
1		2441.000	79.78	10.36	90.14	114.00	-23.86	peak			
2	*	2441.000	71.69	10.36	82.05	94.00	-11.95	AVG	100	218	


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 27 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

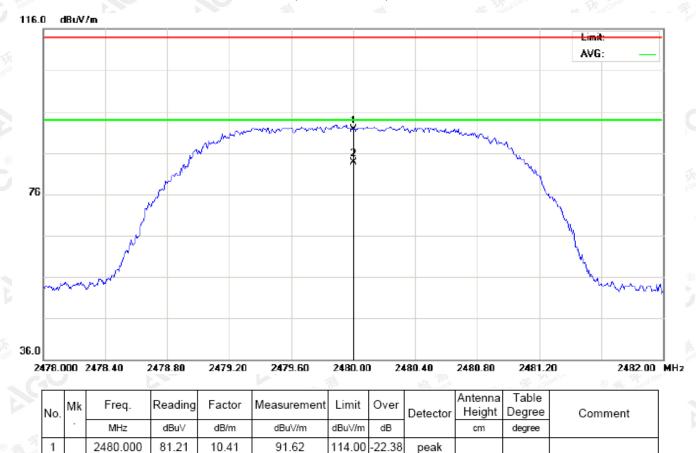

94.00

-10.29

AVG

100

83.71

RESULT: PASS

2480.000


73.30

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 28 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

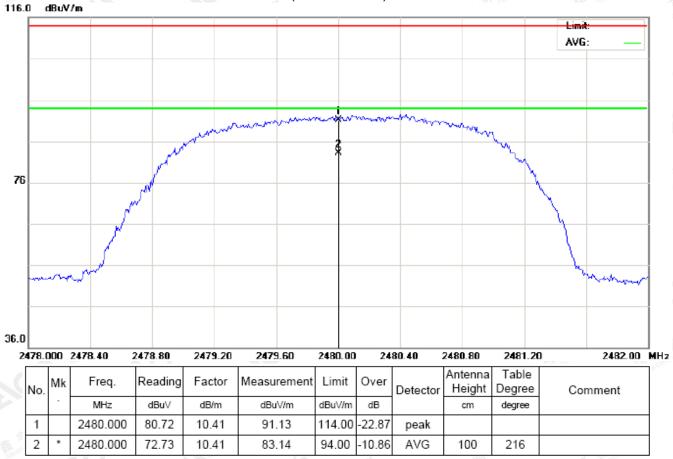

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 29 of 54

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	77.99	10.32	88.31	114	-25.69	Horizontal
2402	77.53	10.32	87.85	114	-26.15	Vertical
2441	80.18	10.36	90.54	114	-23.46	Horizontal
2441	79.78	10.36	90.14	114	-23.86	Vertical
2480	81.21	10.41	91.62	114	-22.38	Horizontal
2480	80.72	10.41	91.13	114	-22.87	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna	
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization	
2402	70.02	10.32	80.34	94	-13.66	Horizontal	
2402	69.59	10.32	79.91	94	-14.09	Vertical	
2441	72.19	10.36	82.55	94	-11.45	Horizontal	
2441	71.69	10.36	82.05	94	-11.95	Vertical	
2480	73.30	10.41	83.71	94	-10.29	Horizontal	
2480	72.73	10.41	83.14	94	-10.86	Vertical	


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gatt.com.



Page 30 of 54

For Harmonics

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

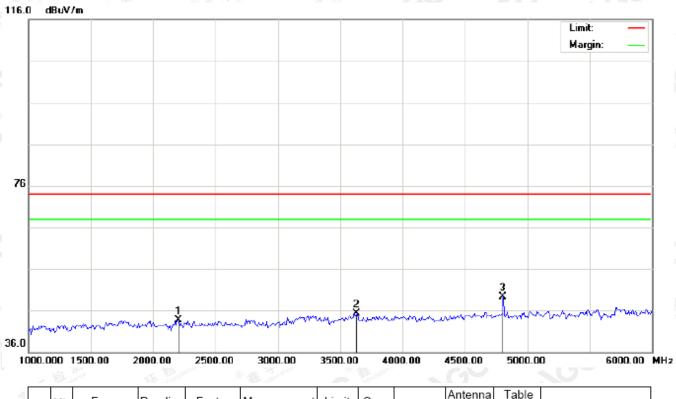

· 1	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
Γ	1		2200.000	33.65	10.10	43.75	74.00	-30.25	peak			
Γ	2		3633.333	32.44	12.93	45.37	74.00	-28.63	peak			
	3	*	4804.000	41.71	7.69	49.40	74.00	-24.60	peak			


RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 31 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

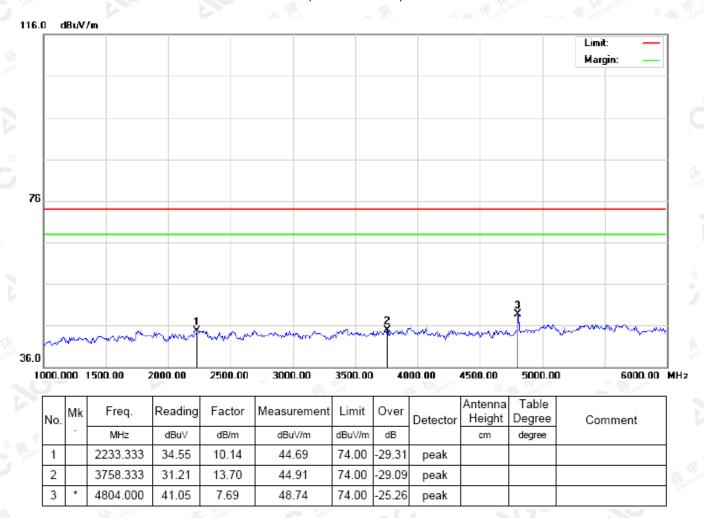


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 32 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

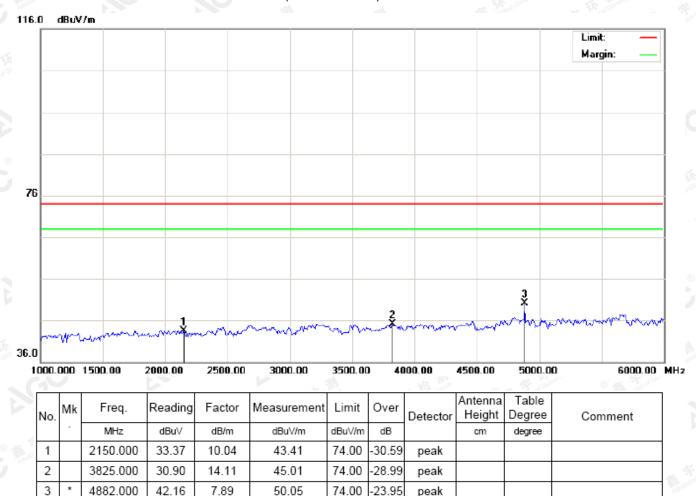

RESULT: PASS


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-cert.com.

\GC ? Attestation of Global Compliance peak



Page 33 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

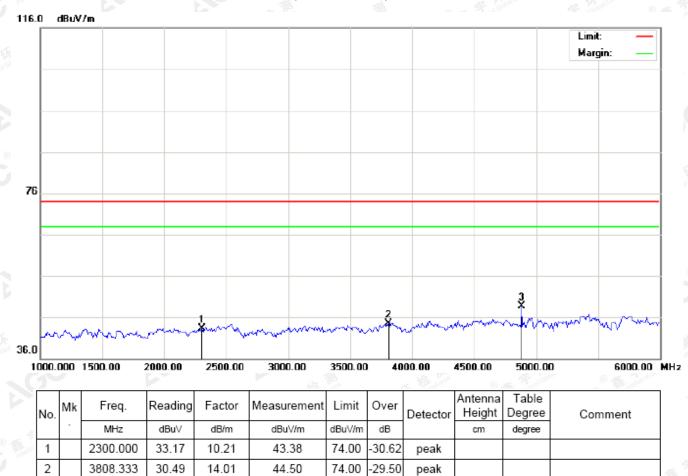

74.00

25.22

peak

RESULT: PASS

4882.000


40.89

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 34 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

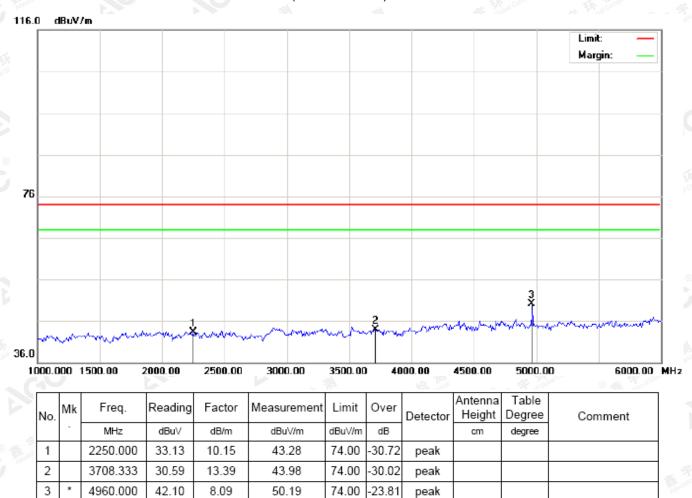


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 35 of 54

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

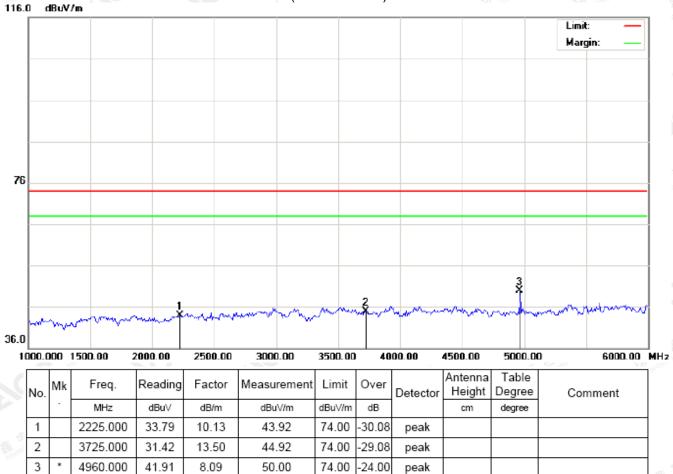

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 36 of 54

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)				Stop frequency(MHz)			
	2200	Kimplence	The Committee	@ ## glation of G	2405	100	
(S) ### (1)	2478	3lobal C	Allestation of Glob	·,O *	2500		

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

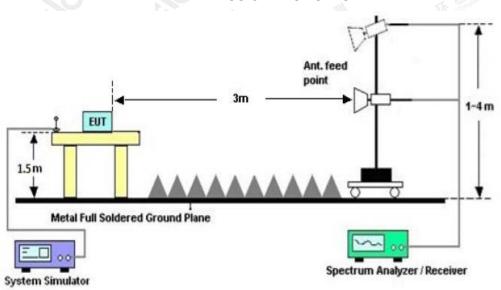

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 37 of 54

10.3 RADIATED TEST RESULT

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2334.275	32.20	10.25	42.45	74.00	-31.55	peak			
2		2390.000	31.50	10.31	41.81	74.00	-32.19	peak			
3		2400.000	41.47	10.32	51.79	74.00	-22.21	peak			
4	*	2402.000	78.06	10.32	88.38	74.00	14.38	peak			
5	Х	2402.000	69.97	10.32	80.29	74.00	6.29	AVG	100	136	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 38 of 54

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
-	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2332.567	31.93	10.25	42.18	74.00	-31.82	peak			
2		2390.000	31.21	10.31	41.52	74.00	-32.48	peak			
3		2400.000	37.56	10.32	47.88	74.00	-26.12	peak			
4	*	2402.000	79.58	10.32	87.90	74.00	15.90	peak			
5	Х	2402.000	69.64	10.32	79.96	74.00	5.96	AVG	100	214	

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 39 of 54

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

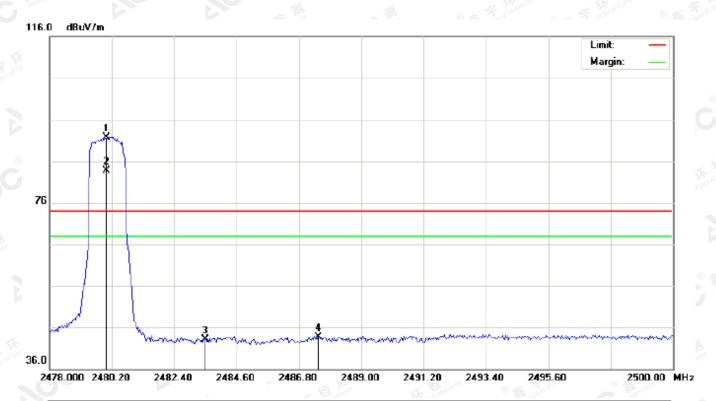


	No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
3		-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
ò	1	*	2480.000	81.25	10.41	91.66	74.00	17.66	peak			
	2	Х	2480.000	73.35	10.41	83.76	74.00	9.76	AVG	100	133	
	3		2483.500	32.69	10.41	43.10	74.00	-30.90	peak			
	4		2487.497	33.27	10.42	43.69	74.00	-30.31	peak			

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 40 of 54

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

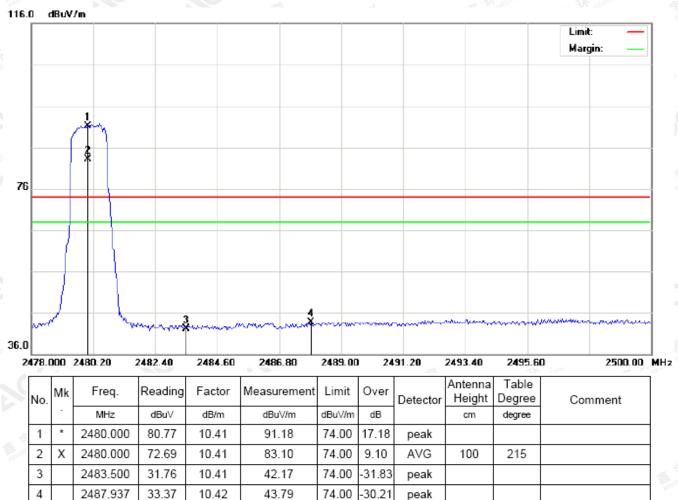

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




age 41 of 54

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

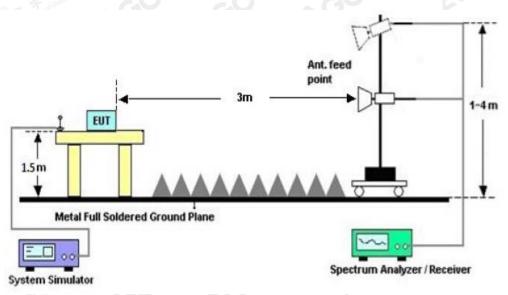

11.3. LIMITS AND MEASUREMENT RESULTS

		4.DE 1.70		(de all) (a) (de la color de l					
BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT									
	Measurement Result								
Applicable Limits		D II							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
The state of the s	Low Channel	0.987	1.105	PASS					
N/A	Middle Channel	0.981	1.098	PASS					
	High Channel	0.979	1.108	PASS					


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.




TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

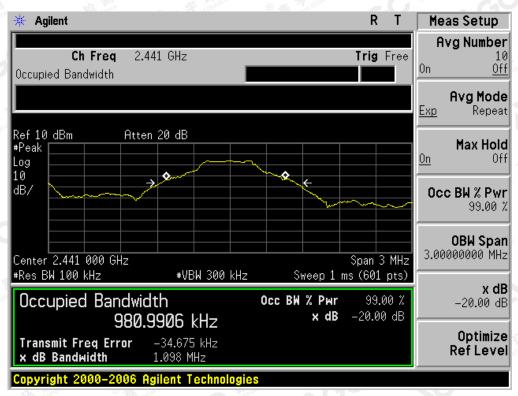


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

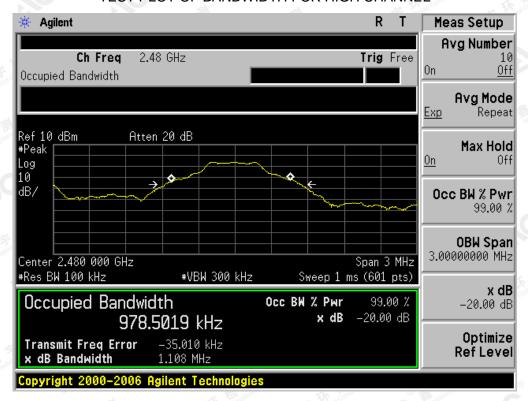

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



age 44 of 54

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage						
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	8 gg 200 56 gg 100 00 00 00 00 00 00 00 00 00 00 00 00	46 / W					
5MHz~30MHz	60	50					

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

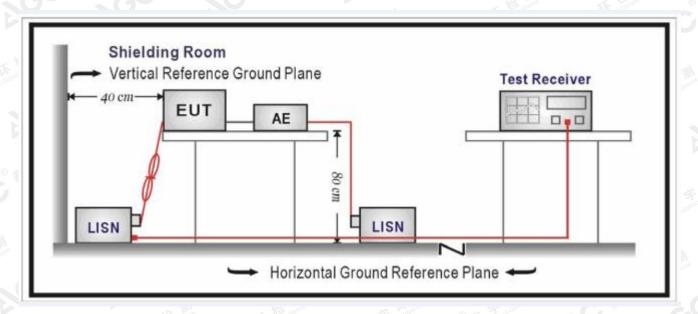

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 45 of 54

@ 400 089 2118

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The EUT was power supplied by dry battery.

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at Attp://www.agc-cett.com.





APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC RADIATED EMISSION TEST SETUP





The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.goalt.com.

Attestation of Global Compliance









The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



The results shown the sample (s) the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; // www.agc. gett.com.

Attestation of Global Compliance



FRONT VIEW OF EUT



BACK VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.


Attestation of Global Compliance



VIEW OF EUT (PORT)



OPEN VIEW OF EUT

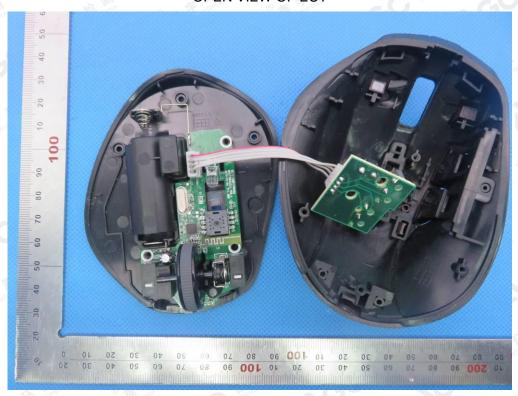


The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cent.com.

Attestation of Global Compliance


AGC 8



INTERNAL VIEW OF EUT-1

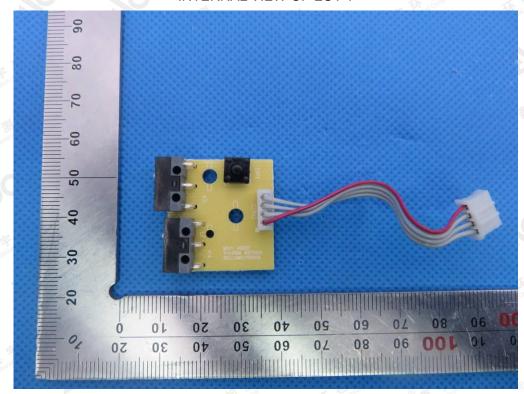


INTERNAL VIEW OF EUT-2

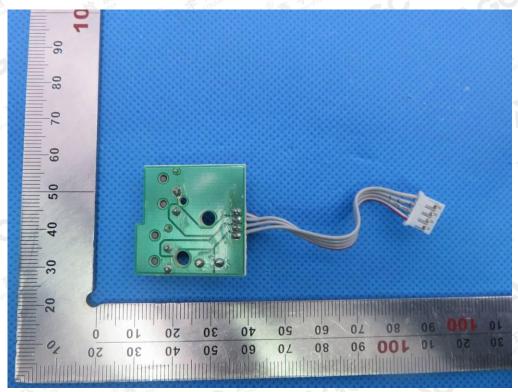


The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




INTERNAL VIEW OF EUT-3

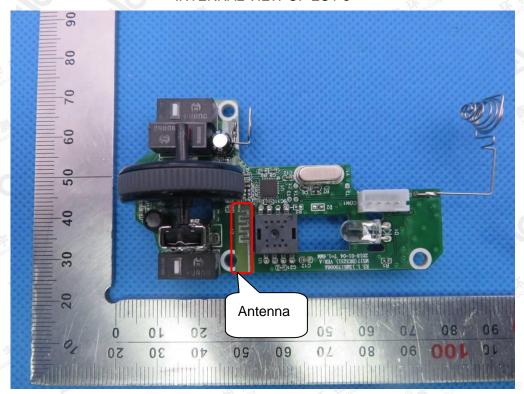

INTERNAL VIEW OF EUT-4

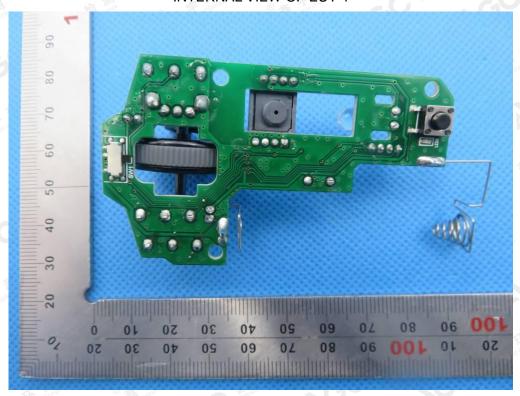


The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





INTERNAL VIEW OF EUT-5

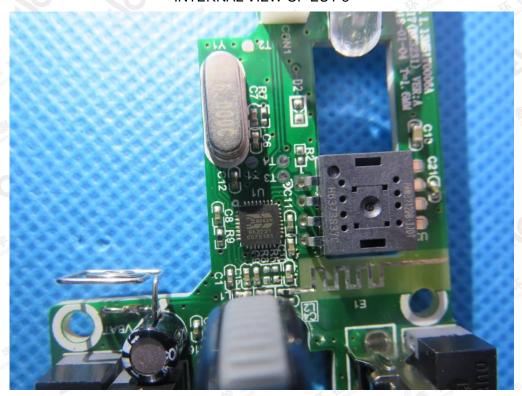

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance