Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
Pol.	Horizontal	Vertical
Peak Avg	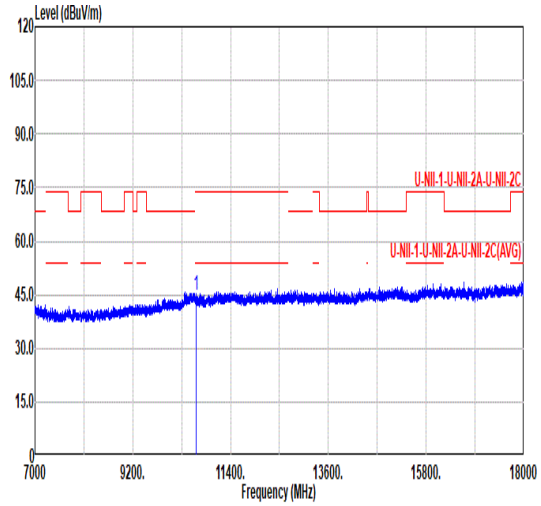 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10620.00 45.03 74.00 -28.97 57.98 37.88 14.31 65.14 0.00 --- --- PEAK	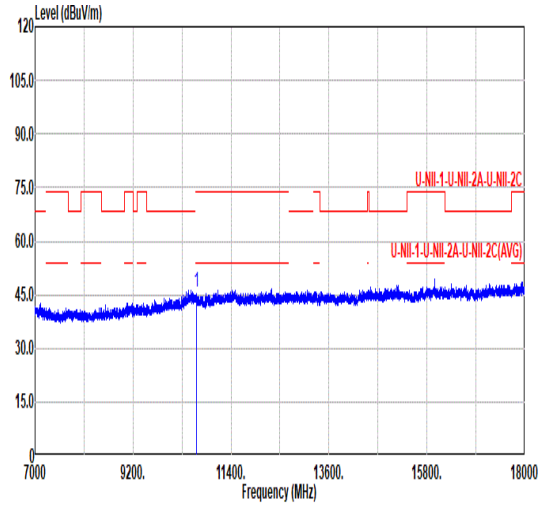 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10620.00 45.89 74.00 -28.11 58.84 37.88 14.31 65.14 0.00 --- --- PEAK

Mode	23	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
Pol.	Horizontal	Fundamental
Peak	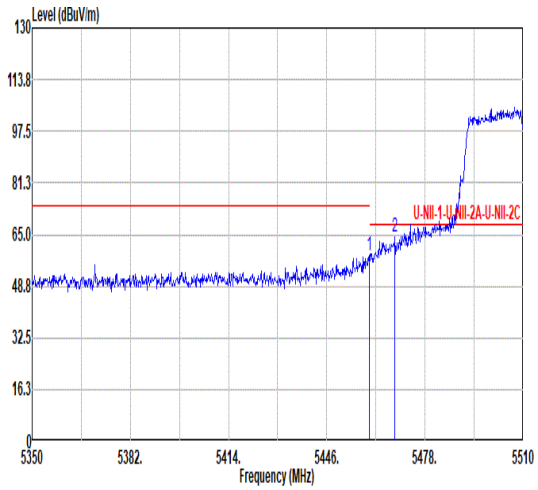 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 58.26 74.00 -15.74 45.18 34.78 10.03 31.73 0.00 100 77 PEAK 2 5468.24 64.03 68.20 -4.17 50.95 34.76 10.04 31.72 0.00 100 77 PEAK	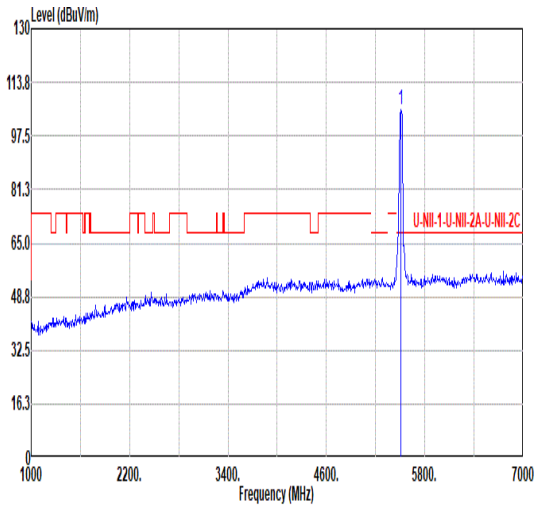 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 105.54 ------ ------ 92.45 34.68 10.11 31.70 0.00 100 77 PEAK
Avg	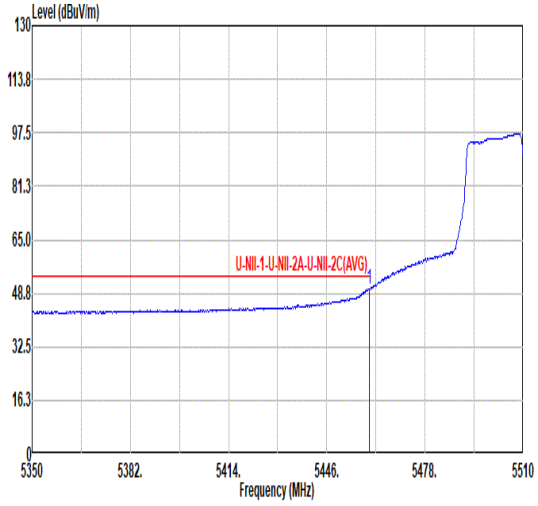 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 50.17 54.00 -3.83 37.09 34.78 10.03 31.73 0.00 100 77 AVERAGE	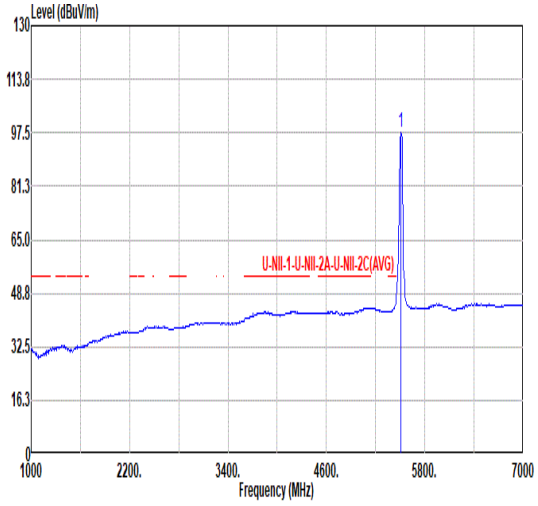 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 97.51 ------ ------ 84.42 34.68 10.11 31.70 0.00 100 77 AVERAGE

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
Pol.	Horizontal	Fundamental
Peak	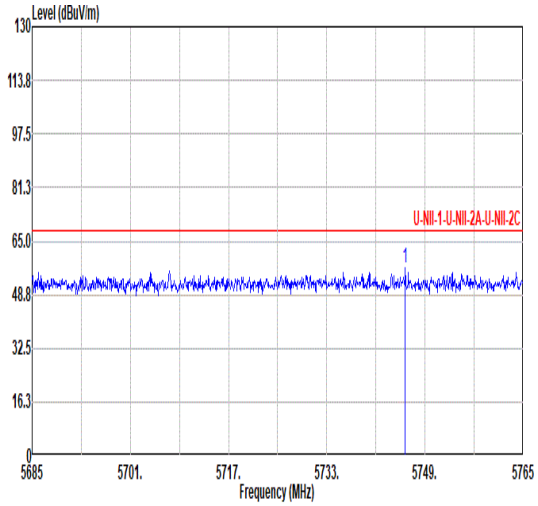 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.80 57.09 68.20 -11.11 44.02 34.60 10.36 31.89 0.00 100 77 PEAK	Blank

Mode	23	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
Pol.	Vertical	Fundamental
Peak	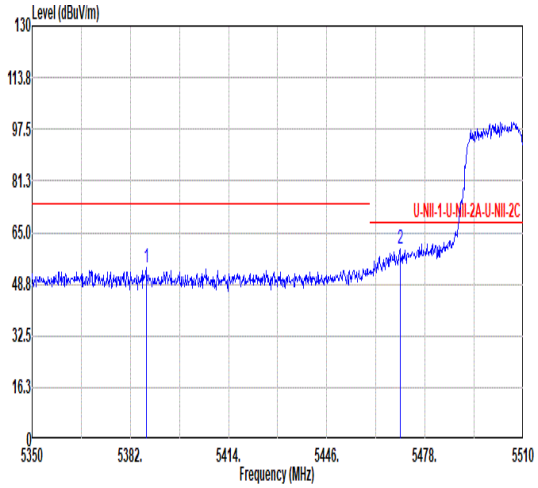 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5387.12 53.85 74.00 -20.15 41.01 34.67 9.93 31.76 0.00 100 33 PEAK 2 5469.84 59.64 68.20 -8.56 46.56 34.76 10.04 31.72 0.00 100 33 PEAK	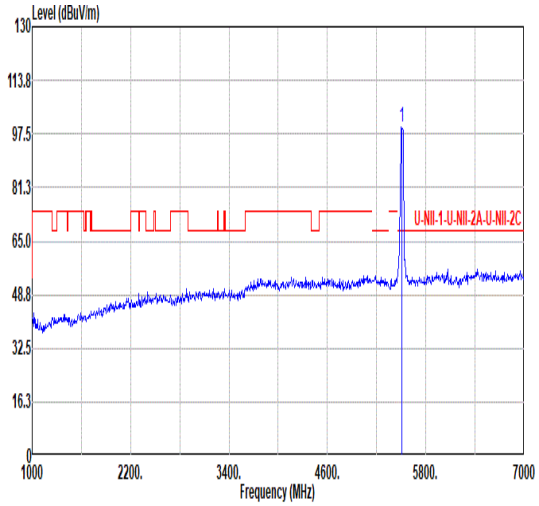 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 99.68 ------ ------ 86.59 34.70 10.09 31.70 0.00 100 33 PEAK
Avg	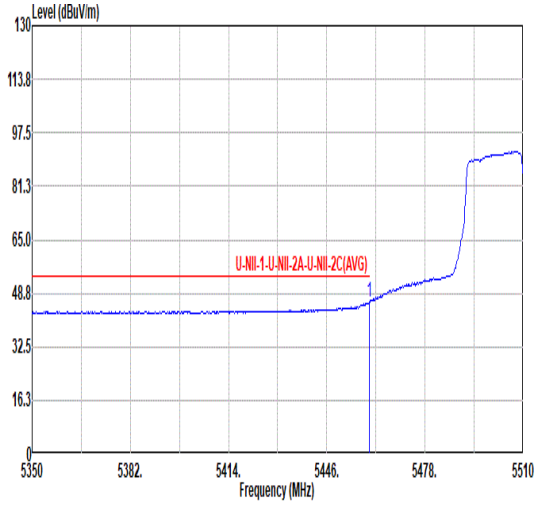 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 46.06 54.00 -7.94 32.98 34.78 10.03 31.73 0.00 100 33 AVERAGE	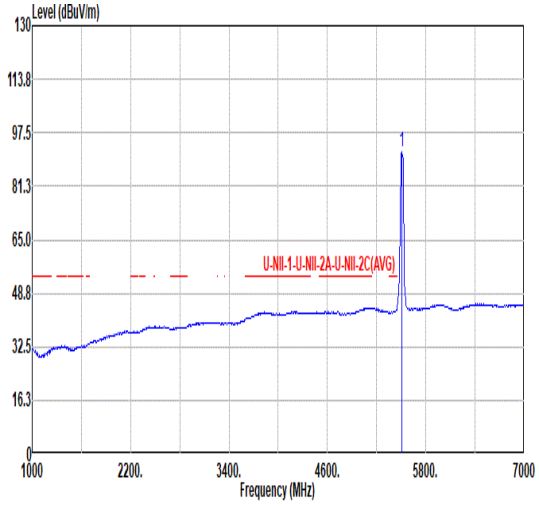 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 91.77 ------ ------ 78.68 34.69 10.10 31.70 0.00 100 33 AVERAGE

Mode	23	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
Pol.	Vertical	Fundamental
Peak	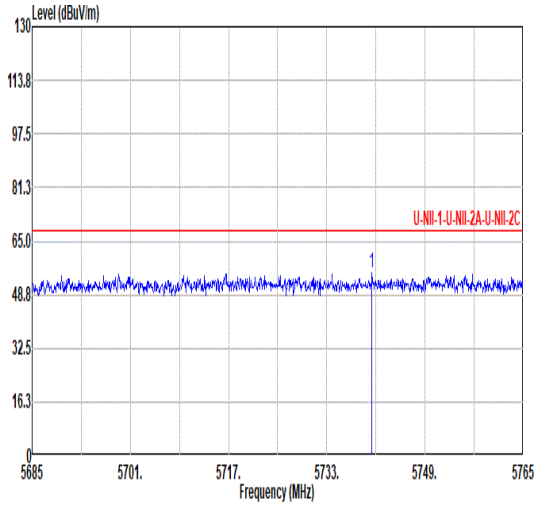 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5740.36 55.39 68.20 -12.81 42.31 34.60 10.36 31.88 0.00 100 33 PEAK	Blank

Mode	23	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz	
Pol.	Horizontal	Vertical
Peak Avg	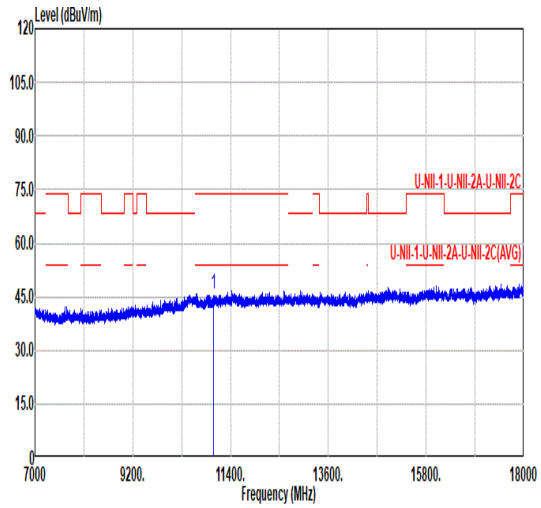 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 45.84 74.00 -28.16 57.93 38.00 14.58 64.67 0.00 --- --- PEAK	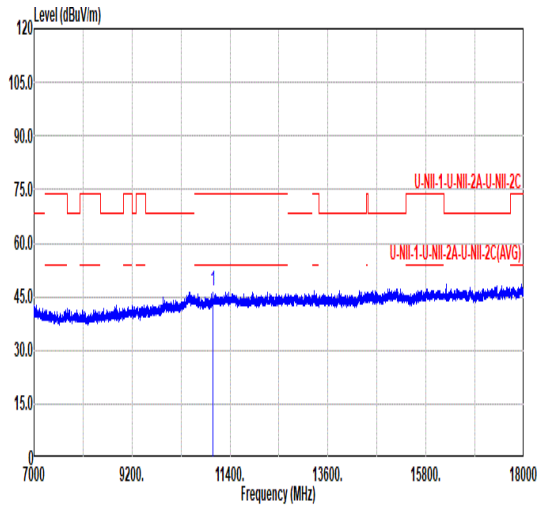 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 46.56 74.00 -27.44 58.65 38.00 14.58 64.67 0.00 --- --- PEAK

Mode	24	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
Pol.	Horizontal	Vertical
Peak Avg	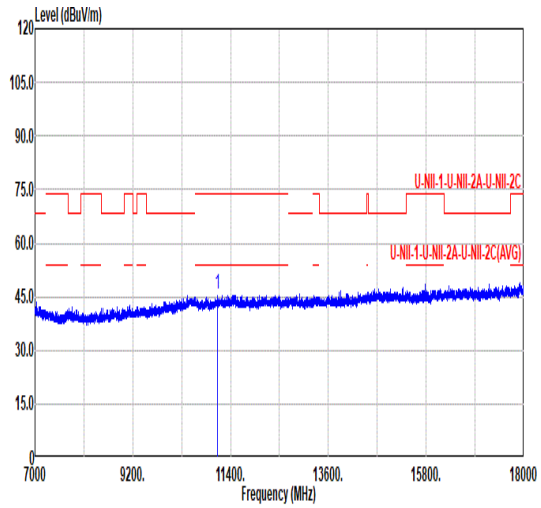 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 45.83 74.00 -28.17 58.20 37.90 14.31 64.58 0.00 --- --- PEAK	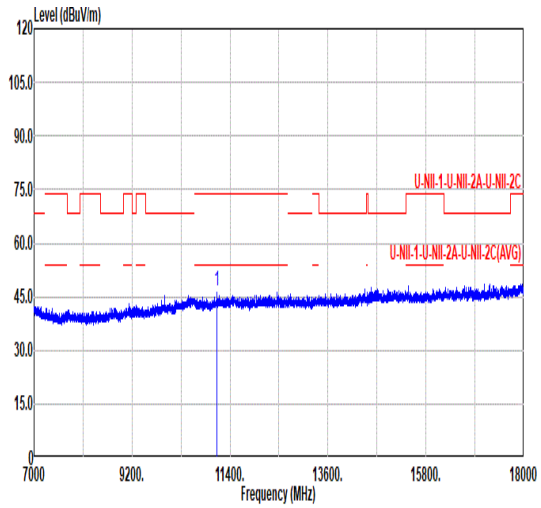 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 46.54 74.00 -27.46 58.91 37.90 14.31 64.58 0.00 --- --- PEAK

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
Pol.	Horizontal	Fundamental
Peak	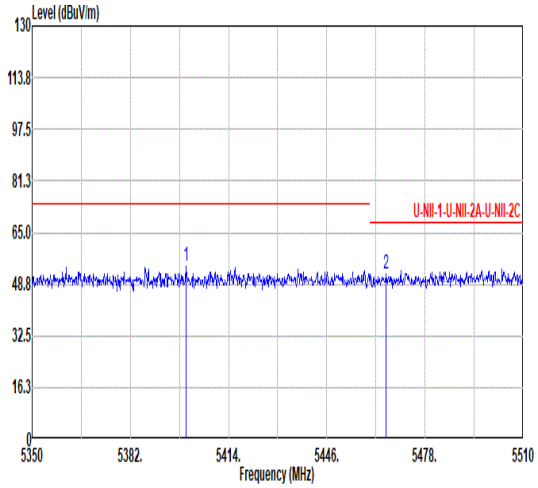 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5400.08 54.66 74.00 -19.34 41.78 34.70 9.94 31.76 0.00 101 77 PEAK 2 5465.20 51.85 68.20 -16.35 38.77 34.77 10.03 31.72 0.00 101 77 PEAK	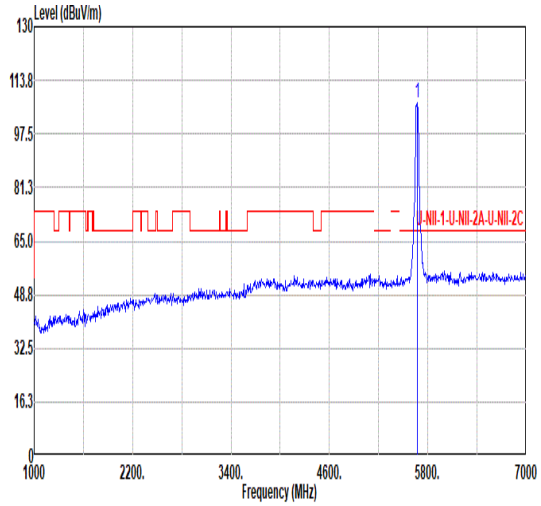 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 107.05 ------ ------ 93.85 34.60 10.30 31.70 0.00 101 77 PEAK
Avg	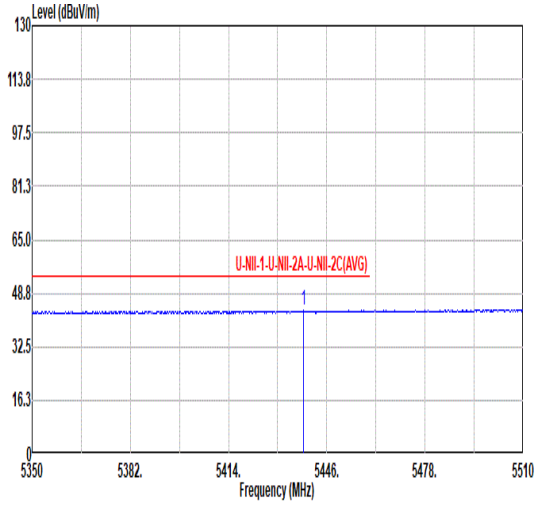 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5438.48 43.50 54.00 -10.50 30.47 34.78 9.99 31.74 0.00 101 77 AVERAGE	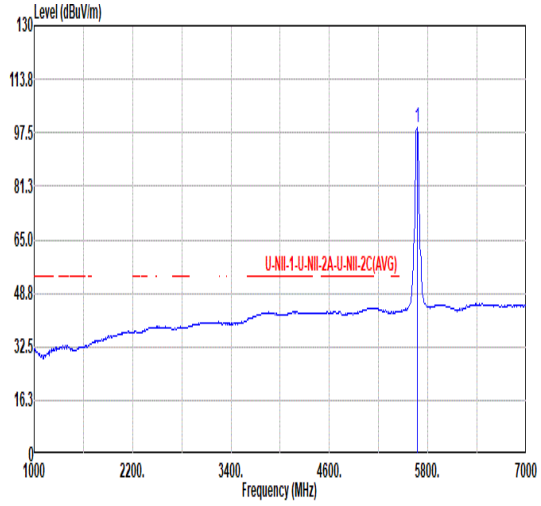 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 98.93 ------ ------ 85.73 34.60 10.30 31.70 0.00 101 77 AVERAGE

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
Pol.	Horizontal	Fundamental
Peak	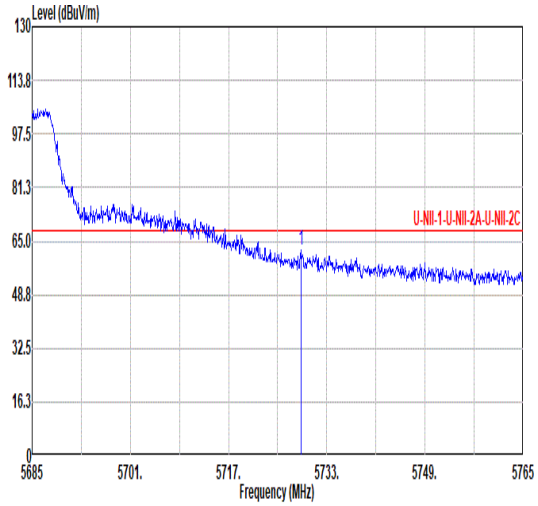 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5728.76 62.41 68.20 -5.79 49.31 34.60 10.35 31.85 0.00 101 77 PEAK	Blank

Mode	25	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
Pol.	Vertical	Fundamental
Peak	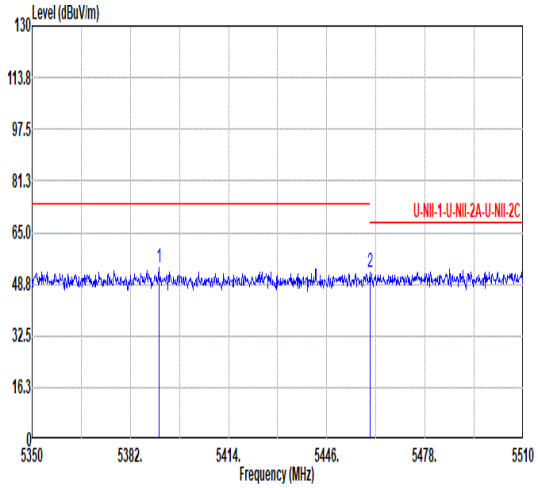 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.28 53.84 74.00 -20.16 40.99 34.68 9.93 31.76 0.00 100 57 PEAK 2 5460.08 52.28 68.20 -15.92 39.20 34.78 10.03 31.73 0.00 100 57 PEAK	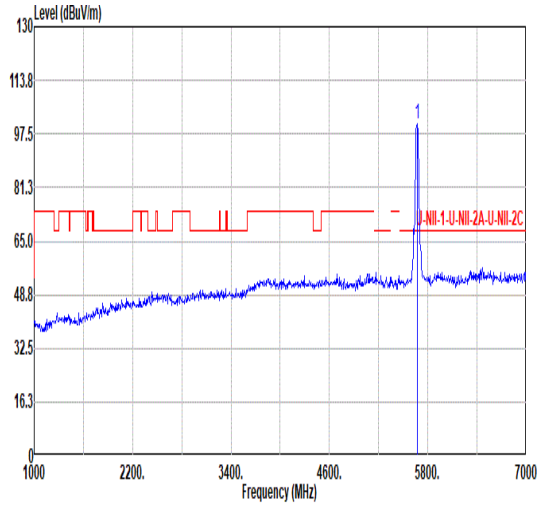 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 100.69 ------ ------ 87.50 34.60 10.30 31.71 0.00 100 57 PEAK
Avg	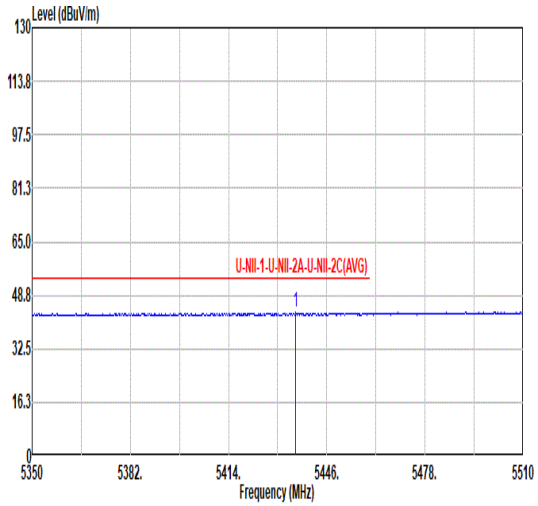 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5435.92 43.43 54.00 -10.57 30.41 34.77 9.99 31.74 0.00 100 57 AVERAGE	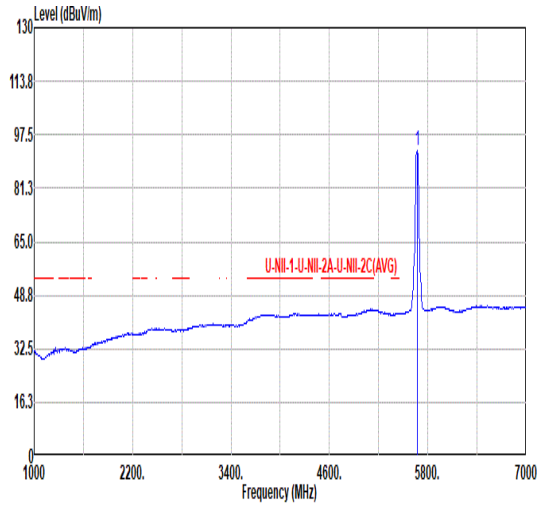 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 92.74 ------ ------ 79.55 34.60 10.30 31.71 0.00 100 57 AVERAGE

Mode	25	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
Pol.	Vertical	Fundamental
Peak	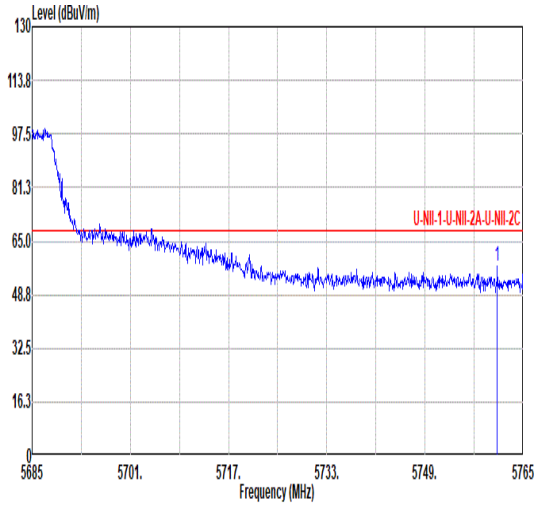 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.76 57.34 68.20 -10.86 44.30 34.60 10.37 31.93 0.00 100 57 PEAK	Blank

Mode	25	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
Pol.	Horizontal	Vertical
Peak Avg	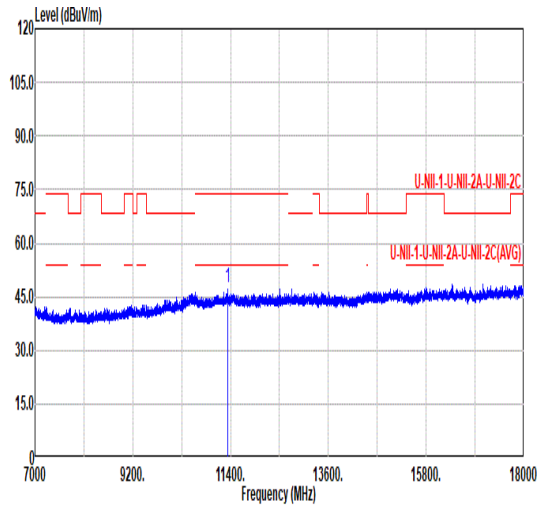 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.35 74.00 -26.65 58.81 38.04 14.80 64.30 0.00 --- --- PEAK	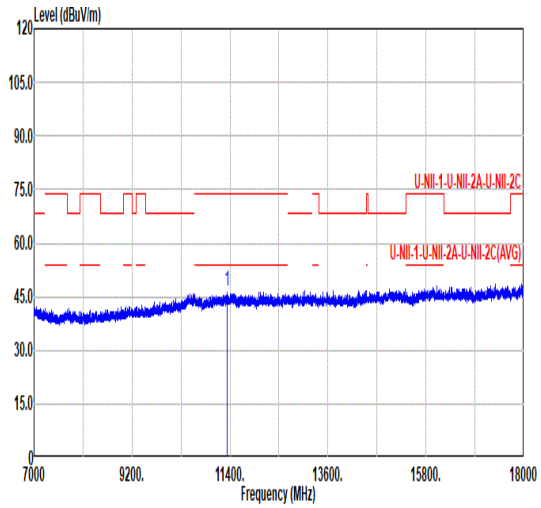 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 46.52 74.00 -27.48 57.98 38.04 14.80 64.30 0.00 --- --- PEAK

Mode	26	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
Pol.	Horizontal	Fundamental
Peak	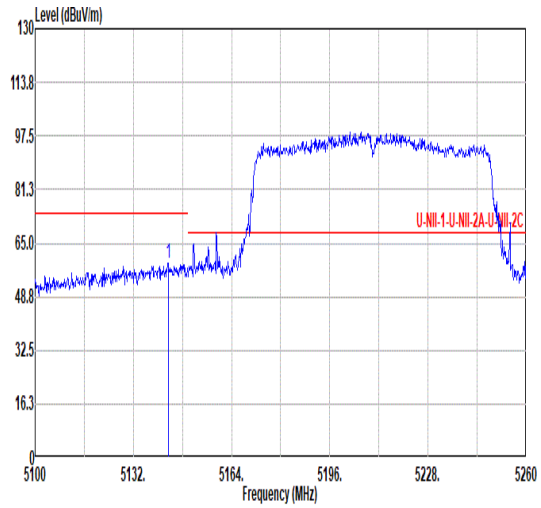 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5143.36 59.03 74.00 -14.97 46.95 34.19 9.78 31.89 0.00 110 85 PEAK	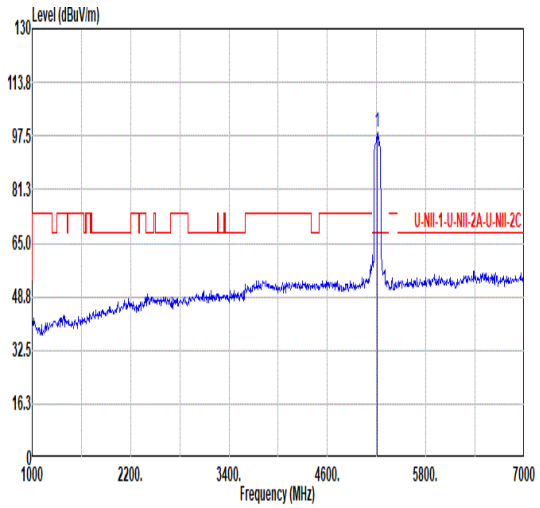 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 98.49 ------ ------ 86.26 34.24 9.84 31.85 0.00 110 85 PEAK
Avg	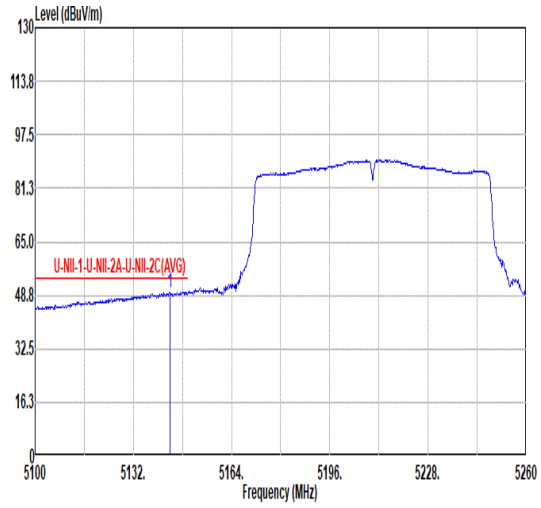 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.00 49.76 54.00 -4.24 37.68 34.19 9.78 31.89 0.00 110 85 AVERAGE	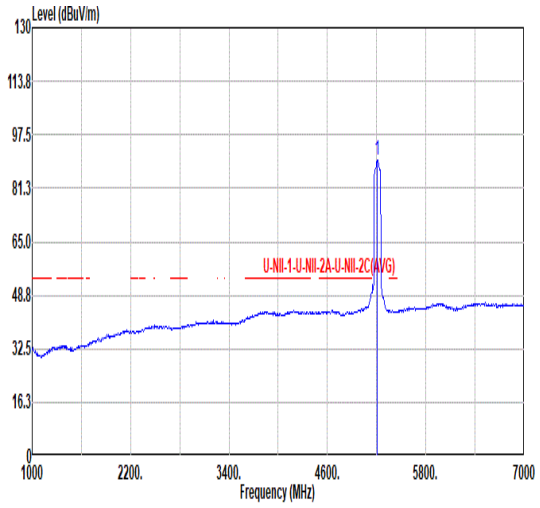 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 89.92 ------ ------ 77.72 34.22 9.84 31.86 0.00 110 85 AVERAGE

Mode	26	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
Pol.	Horizontal	Fundamental
Peak	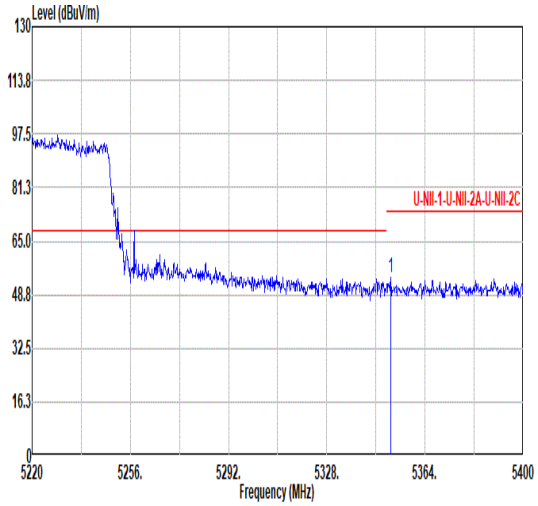 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.58 54.13 74.00 -19.87 41.40 34.60 9.91 31.78 0.00 110 85 PEAK	Blank
Avg	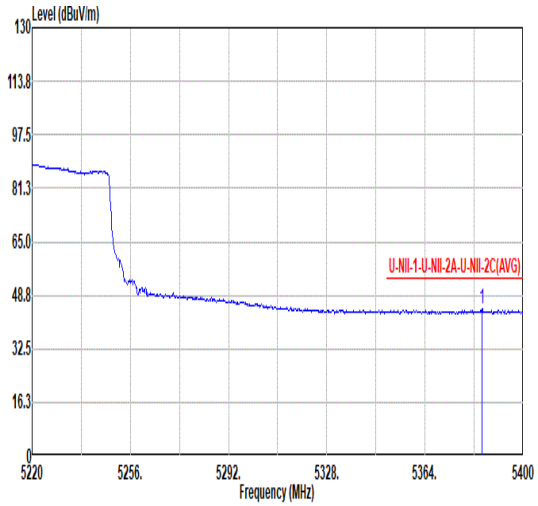 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5384.88 44.67 54.00 -9.33 31.84 34.67 9.93 31.77 0.00 110 85 AVERAGE	Blank

Mode	26	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
Pol.	Vertical	Fundamental
Peak	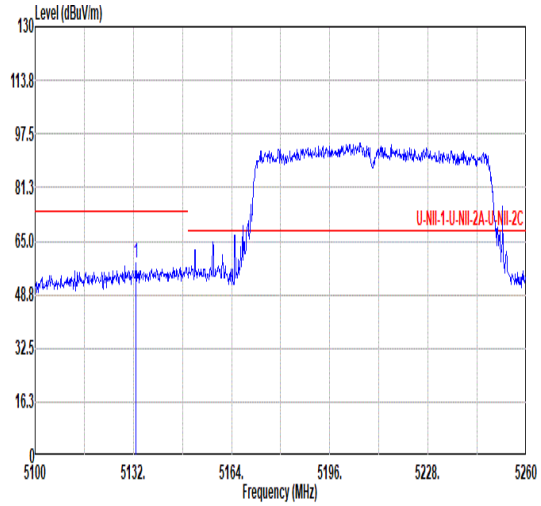 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5132.80 58.30 74.00 -15.70 46.26 34.17 9.77 31.90 0.00 100 59 PEAK	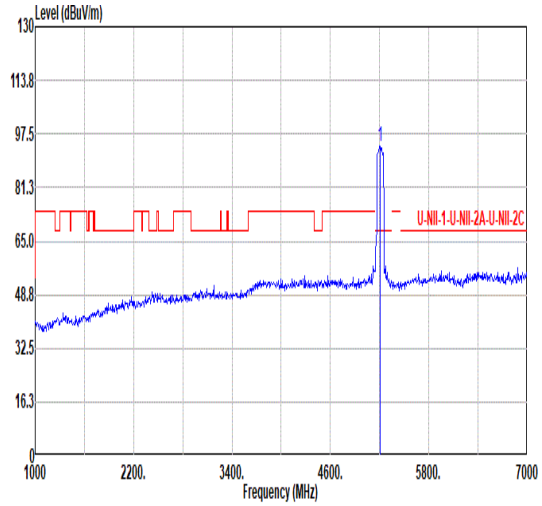 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 93.84 ------ ------ 81.68 34.20 9.83 31.87 0.00 100 59 PEAK
Avg	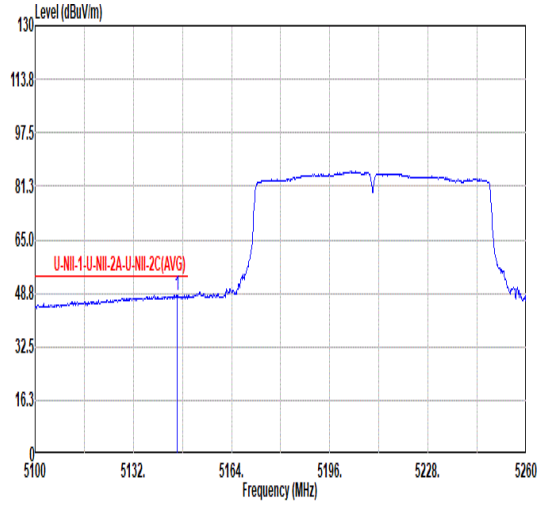 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.24 48.29 54.00 -5.71 36.21 34.19 9.78 31.89 0.00 100 59 AVERAGE	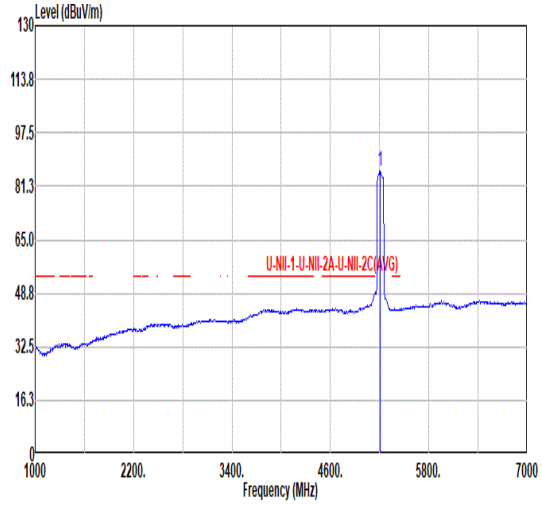 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 85.95 ------ ------ 73.78 34.20 9.83 31.86 0.00 100 59 AVERAGE

Mode	26	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
Pol.	Vertical	Fundamental
Peak	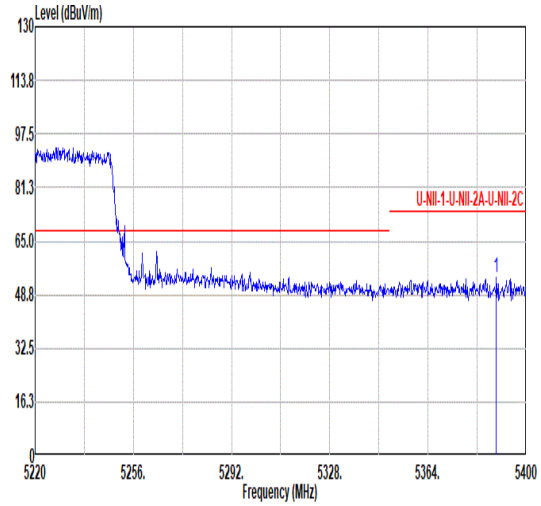 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5389.02 53.78 74.00 -20.22 40.93 34.68 9.93 31.76 0.00 100 59 PEAK	Blank
Avg	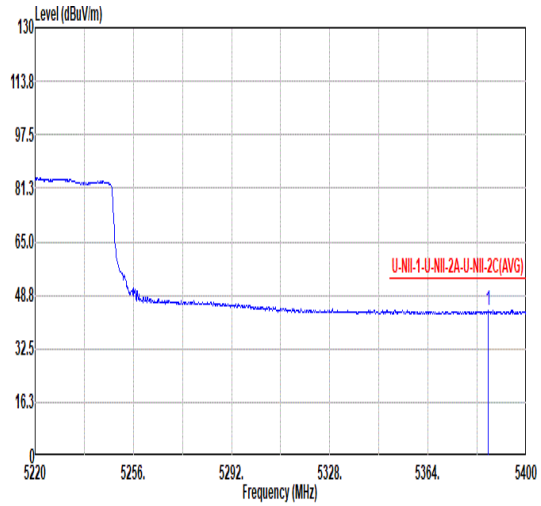 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5385.96 44.05 54.00 -9.95 31.21 34.67 9.93 31.76 0.00 100 59 AVERAGE	Blank

Mode	26	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
Pol.	Horizontal	Vertical
Peak Avg	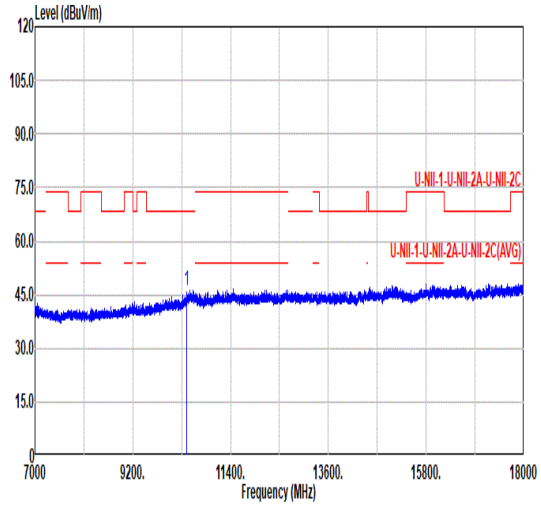 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 46.02 68.20 -22.18 59.67 37.55 14.17 65.37 0.00 --- --- PEAK	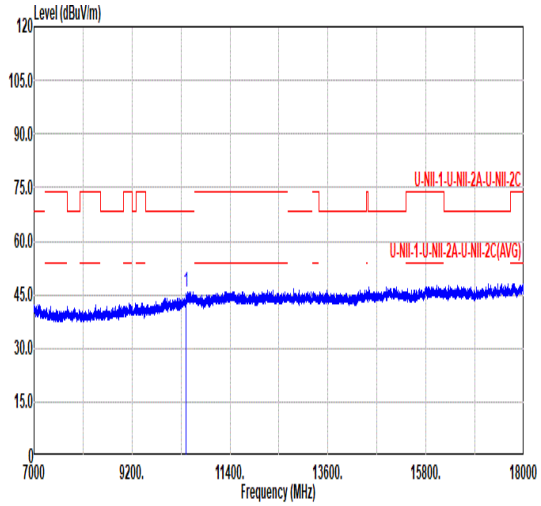 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 45.75 68.20 -22.45 59.43 37.53 14.17 65.38 0.00 --- --- PEAK

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
Pol.	Horizontal	Fundamental
Peak	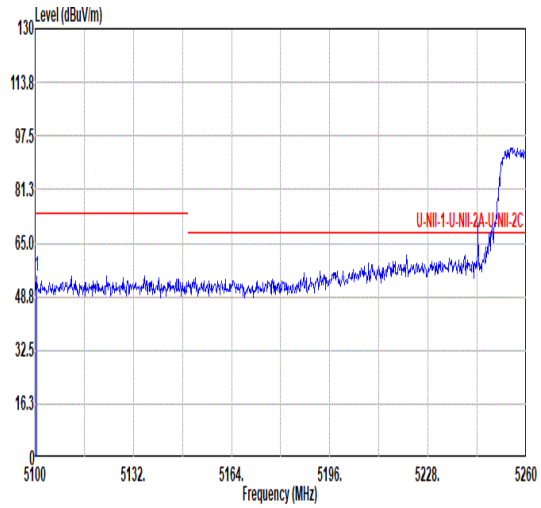 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5100.48 55.14 74.00 -18.86 43.22 34.10 9.74 31.92 0.00 100 83 PEAK	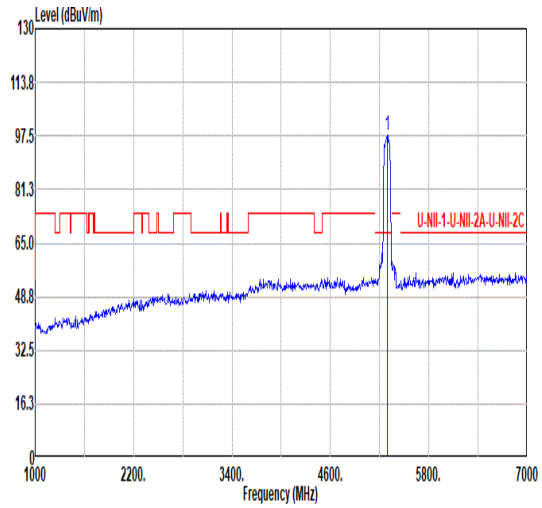 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 97.64 ------ ------ 85.12 34.46 9.88 31.82 0.00 100 83 PEAK
Avg	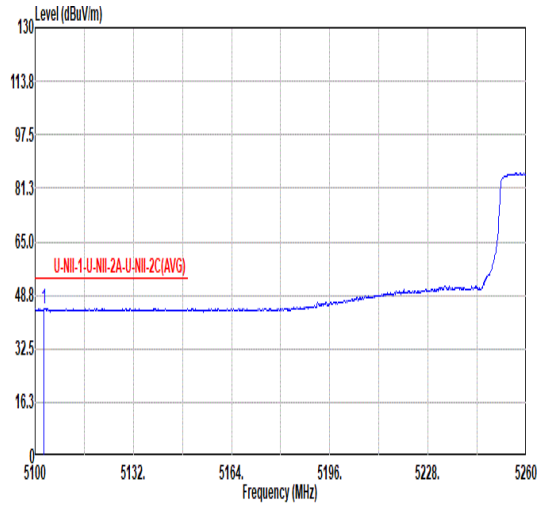 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5102.88 44.77 54.00 -9.23 32.83 34.11 9.75 31.92 0.00 100 83 AVERAGE	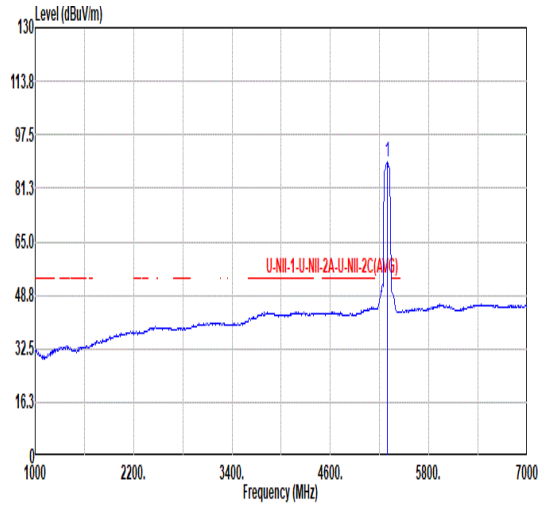 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 89.35 ------ ------ 76.80 34.48 9.88 31.81 0.00 100 83 AVERAGE

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
Pol.	Horizontal	Fundamental
Peak	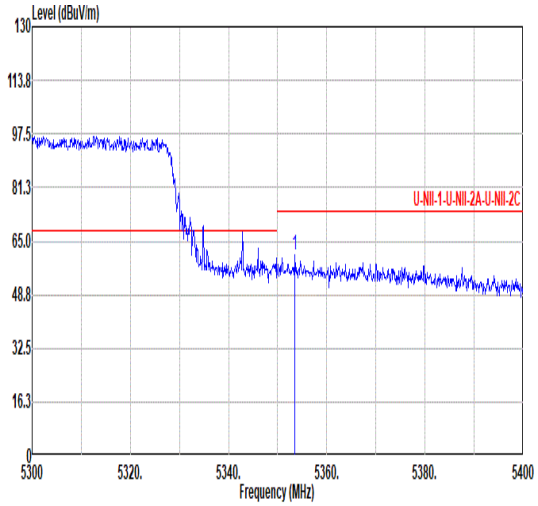 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.50 60.98 74.00 -13.02 48.24 34.61 9.91 31.78 0.00 100 83 PEAK	Blank
Avg	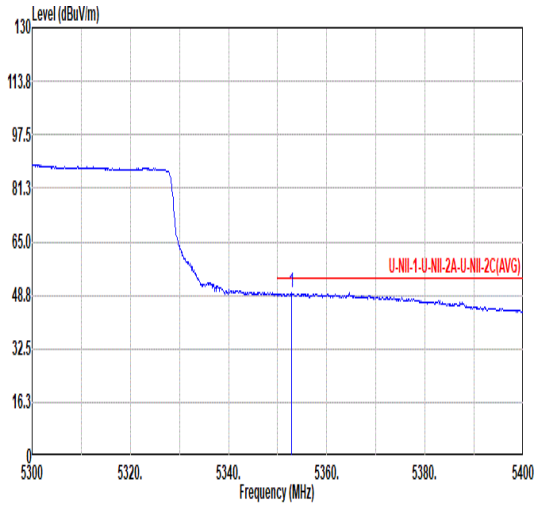 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.90 49.58 54.00 -4.42 36.84 34.61 9.91 31.78 0.00 100 83 AVERAGE	Blank

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
Pol.	Vertical	Fundamental
Peak	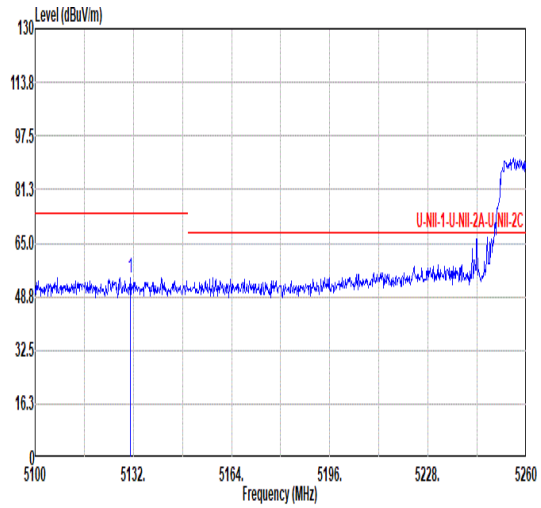 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5131.04 54.58 74.00 -19.42 42.55 34.16 9.77 31.90 0.00 121 360 PEAK	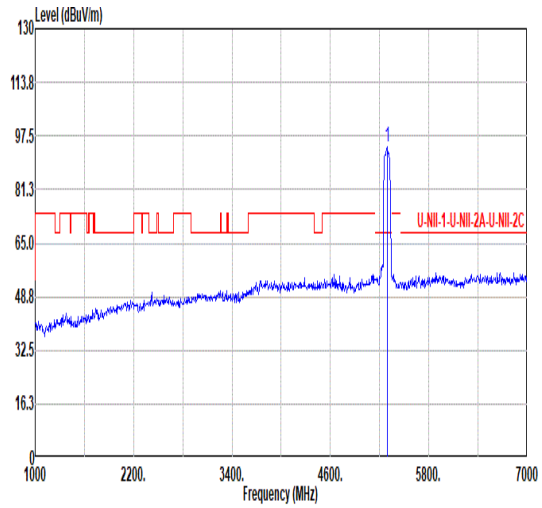 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 94.02 ------ ------ 81.50 34.46 9.88 31.82 0.00 121 360 PEAK
Avg	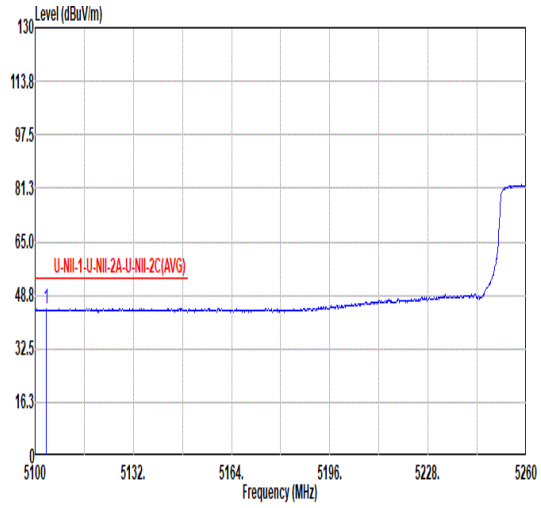 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5103.68 44.87 54.00 -9.13 32.92 34.11 9.75 31.91 0.00 121 360 AVERAGE	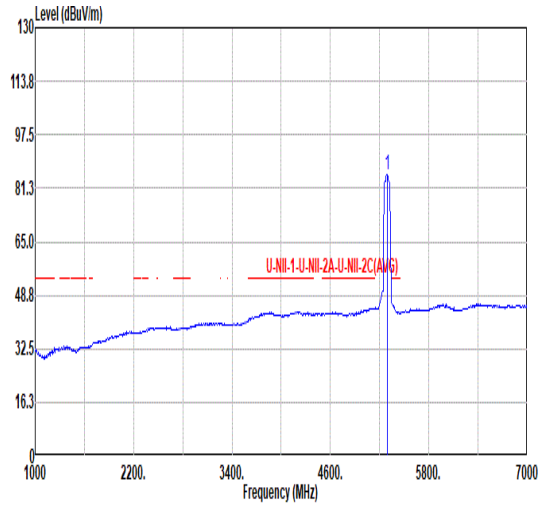 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 85.40 ------ ------ 72.90 34.44 9.88 31.82 0.00 121 360 AVERAGE

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
Pol.	Vertical	Fundamental
Peak	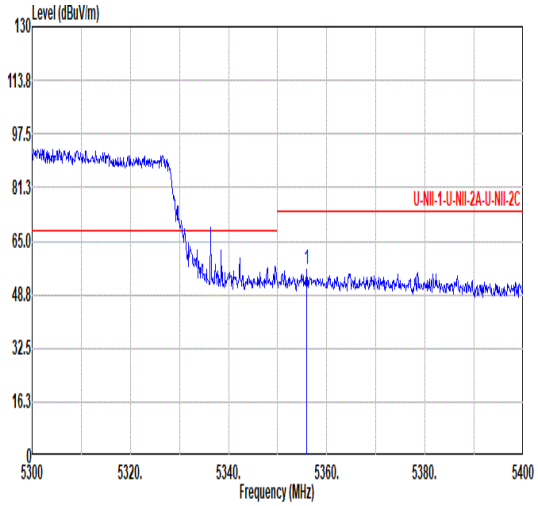 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.90 56.28 74.00 -17.72 43.54 34.61 9.91 31.78 0.00 121 360 PEAK	Blank
Avg	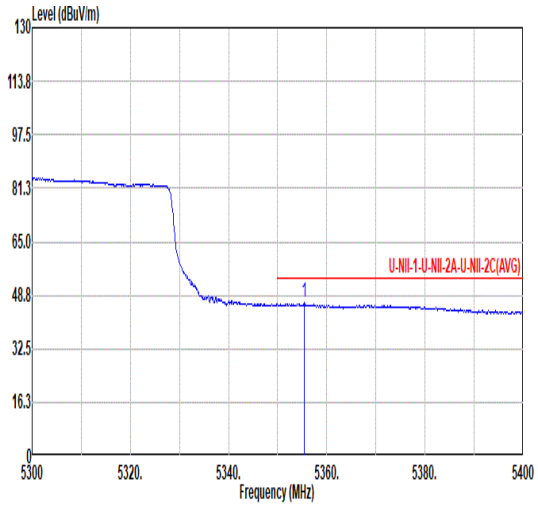 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.40 46.36 54.00 -7.64 33.62 34.61 9.91 31.78 0.00 121 360 AVERAGE	Blank

Mode	27	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
Pol.	Horizontal	Vertical
Peak Avg	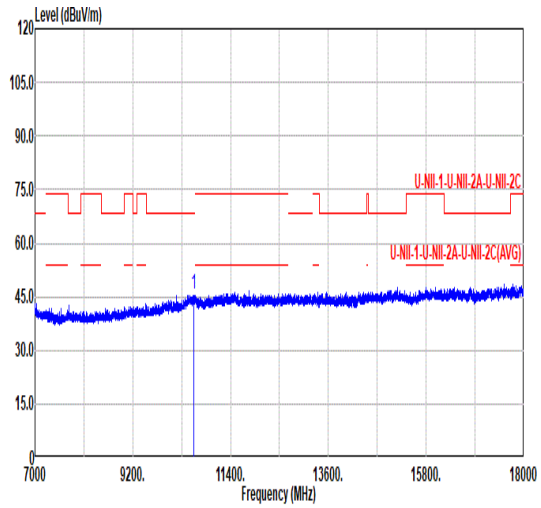 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 45.52 68.20 -22.68 58.69 37.80 14.26 65.23 0.00 --- --- PEAK	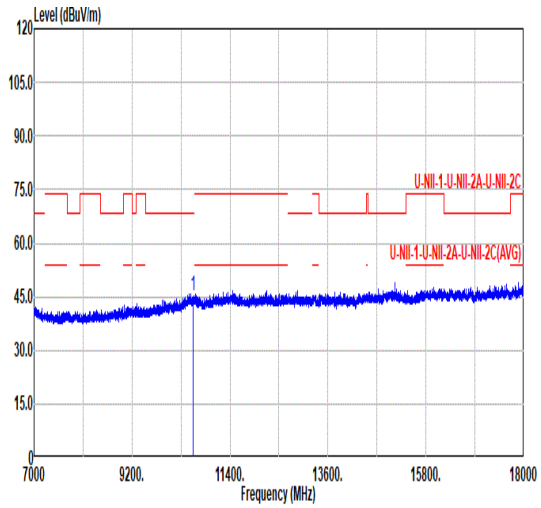 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 45.28 68.20 -22.92 58.44 37.80 14.26 65.22 0.00 --- --- PEAK

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
Pol.	Horizontal	Fundamental
Peak	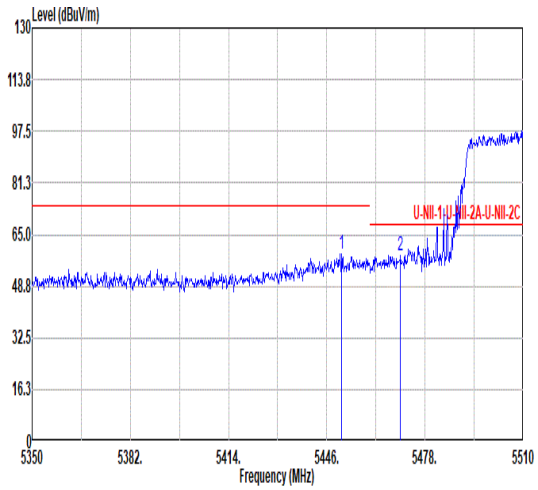 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.80 58.73 74.00 -15.27 45.65 34.80 10.01 31.73 0.00 101 75 PEAK 2 5470.00 58.56 68.20 -9.64 45.48 34.76 10.04 31.72 0.00 101 75 PEAK	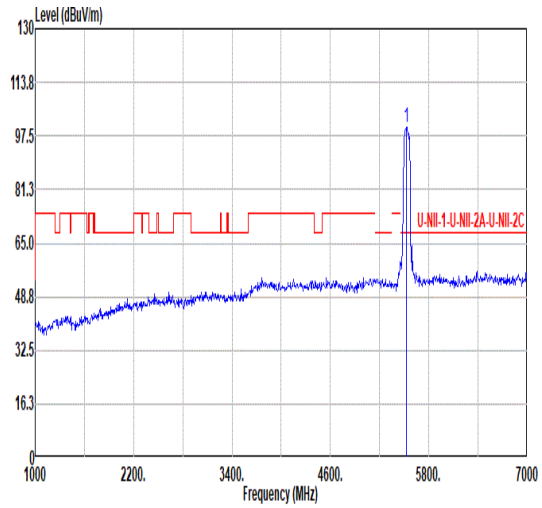 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 100.04 ------ ------ 86.96 34.65 10.12 31.69 0.00 101 75 PEAK
Avg	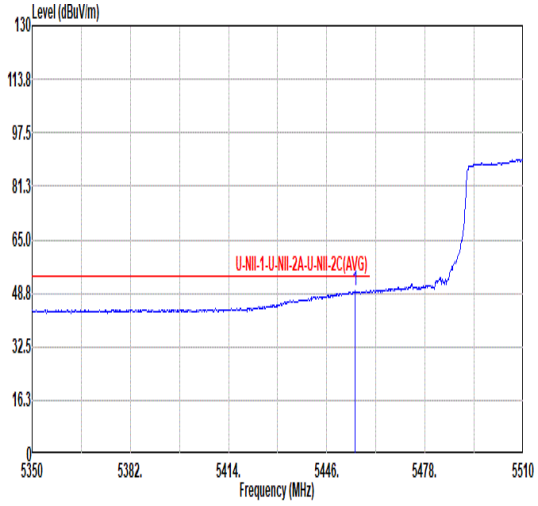 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.28 49.59 54.00 -4.41 36.51 34.79 10.02 31.73 0.00 101 75 AVERAGE	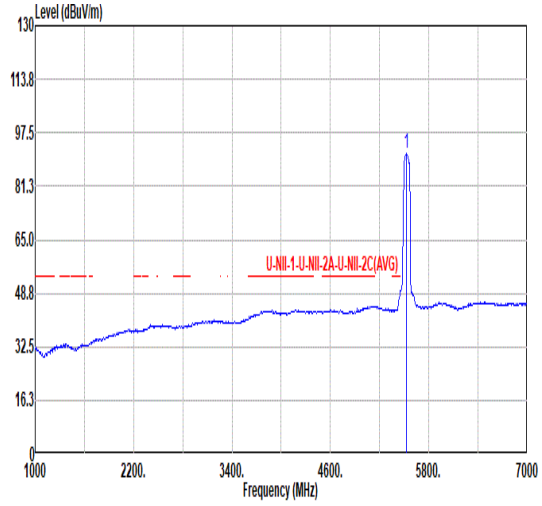 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 91.35 ------ ------ 78.27 34.65 10.12 31.69 0.00 101 75 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
Pol.	Horizontal	Fundamental
Peak	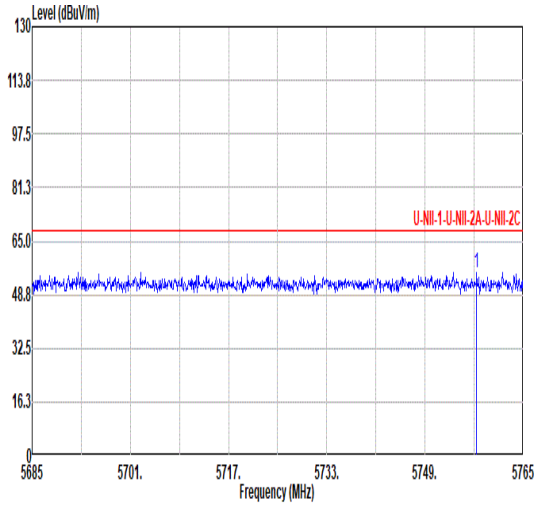 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5757.40 55.47 68.20 -12.73 42.42 34.60 10.37 31.92 0.00 101 75 PEAK	Blank

Mode	28	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
Pol.	Vertical	Fundamental
Peak	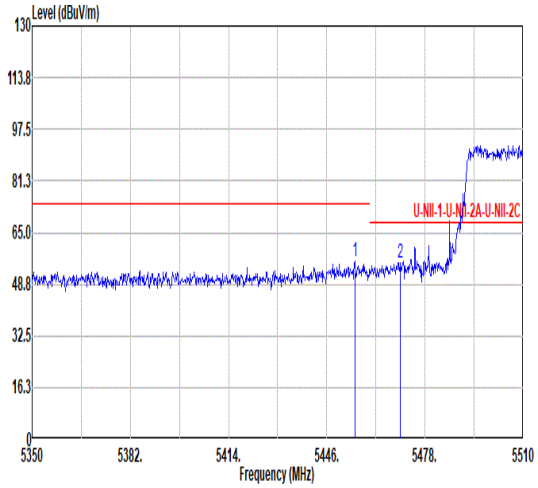 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.12 56.15 74.00 -17.85 43.07 34.79 10.02 31.73 0.00 130 356 PEAK 2 5469.84 55.31 68.20 -12.89 42.23 34.76 10.04 31.72 0.00 130 356 PEAK	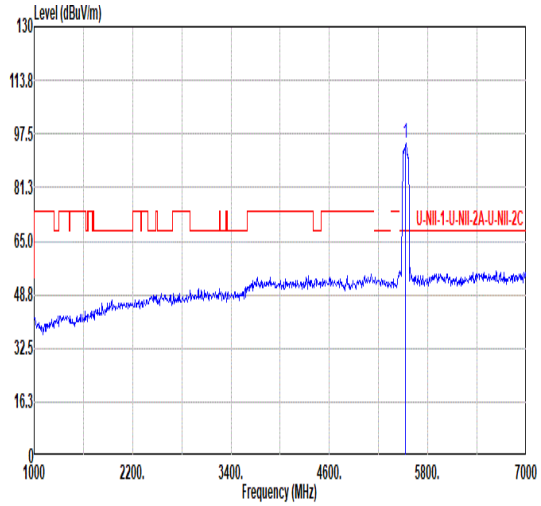 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 94.52 ------ ------ 81.44 34.63 10.14 31.69 0.00 130 356 PEAK
Avg	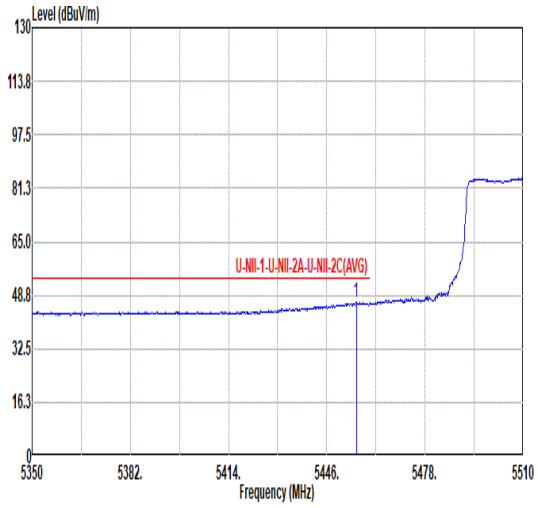 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.60 46.50 54.00 -7.50 33.42 34.79 10.02 31.73 0.00 130 356 AVERAGE	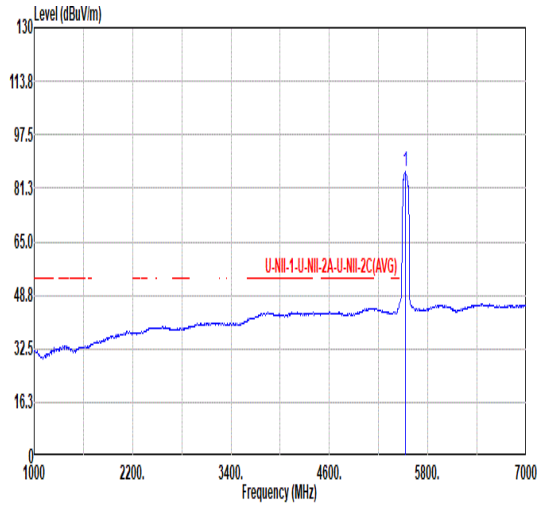 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 86.12 ------ ------ 73.04 34.65 10.12 31.69 0.00 130 356 AVERAGE

Mode	28	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
Pol.	Vertical	Fundamental
Peak	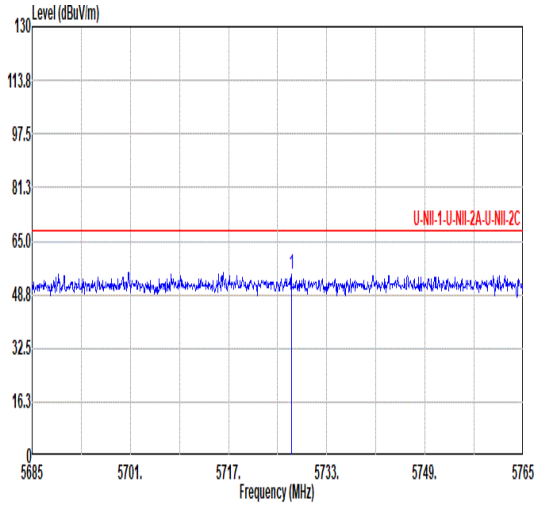 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.24 54.80 68.20 -13.40 41.70 34.60 10.35 31.85 0.00 130 356 PEAK	Blank

Mode	28	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
Pol.	Horizontal	Vertical
Peak Avg	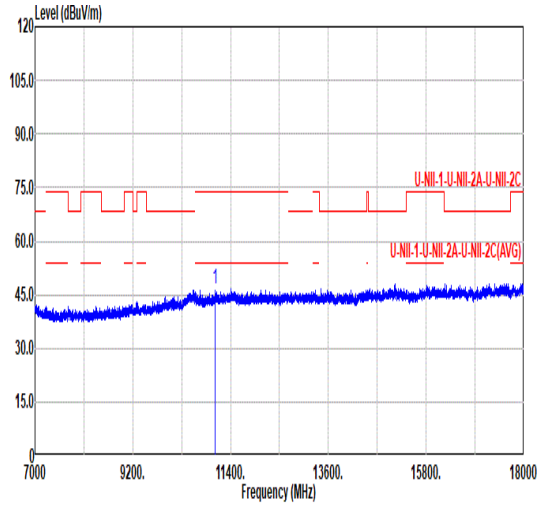 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.51 74.00 -27.49 58.53 38.00 14.61 64.63 0.00 --- --- PEAK	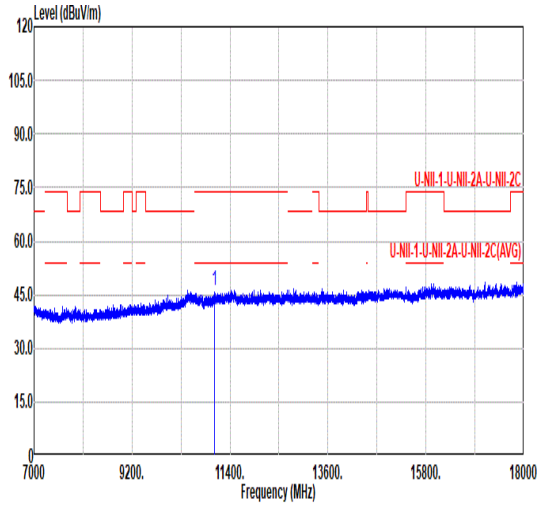 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 46.25 74.00 -27.75 58.27 38.00 14.61 64.63 0.00 --- --- PEAK

Mode	29	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
Pol.	Horizontal	Fundamental
Peak	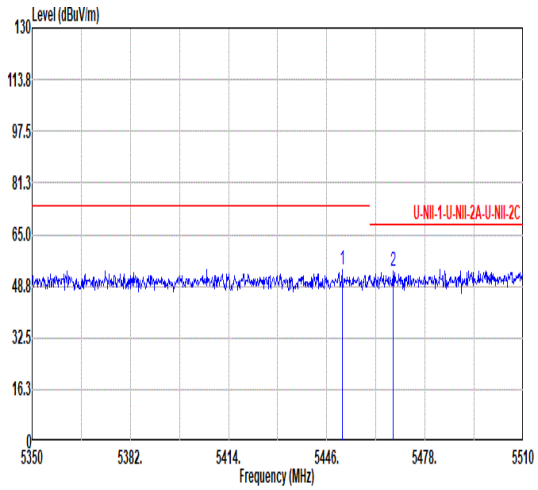 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.96 53.92 74.00 -20.08 40.84 34.80 10.01 31.73 0.00 104 77 PEAK 2 5467.60 53.29 68.20 -14.91 40.21 34.76 10.04 31.72 0.00 104 77 PEAK	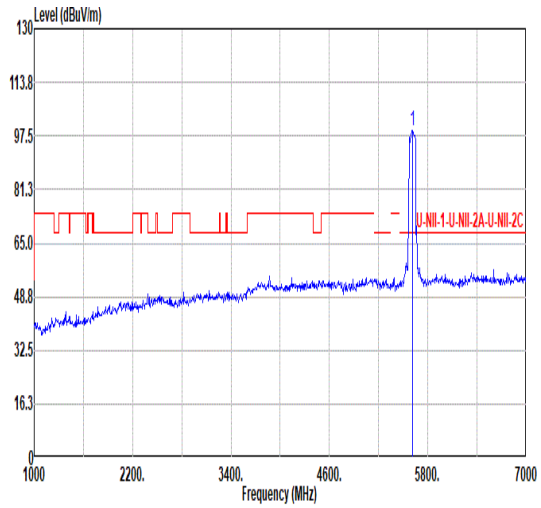 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 99.05 ------ ------ 85.83 34.60 10.26 31.64 0.00 104 77 PEAK
Avg	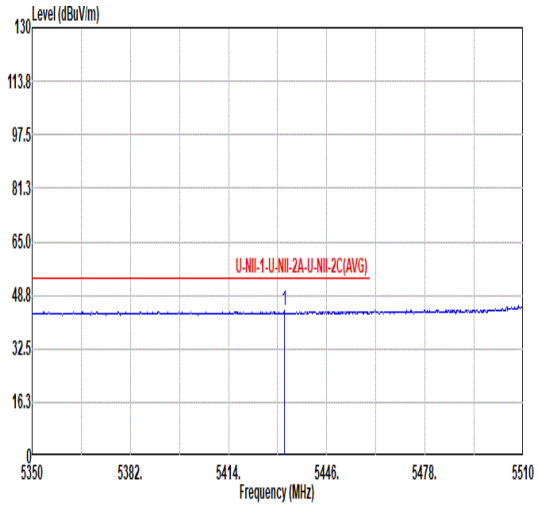 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5432.08 43.92 54.00 -10.08 30.92 34.76 9.98 31.74 0.00 104 77 AVERAGE	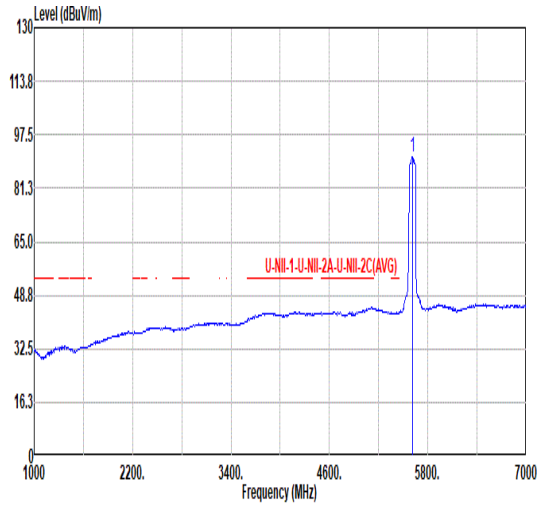 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 90.96 ------ ------ 77.74 34.60 10.26 31.64 0.00 104 77 AVERAGE

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
Pol.	Horizontal	Fundamental
Peak	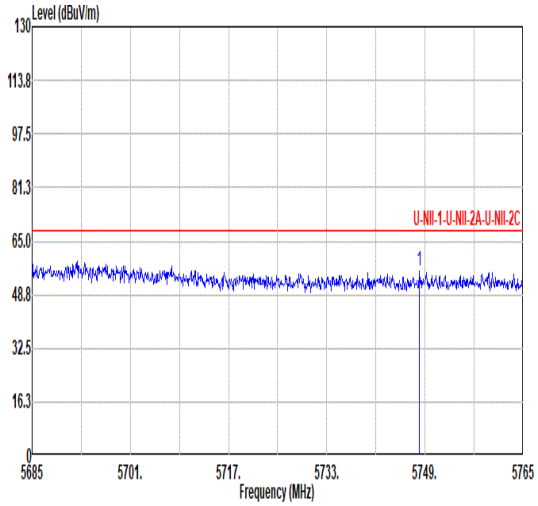 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5748.12 56.15 68.20 -12.05 43.09 34.60 10.36 31.90 0.00 104 77 PEAK	Blank

Mode	29	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
Pol.	Vertical	Fundamental
Peak	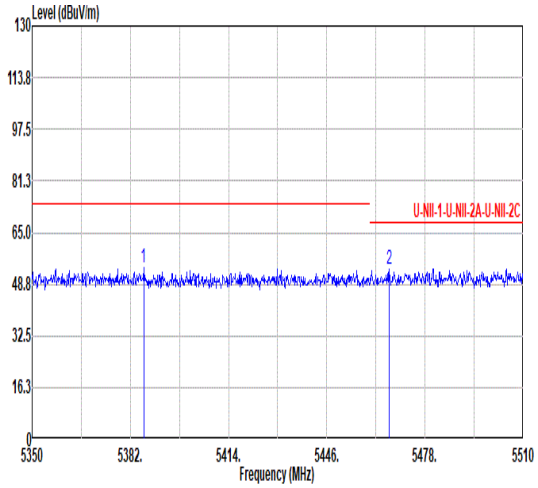 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5386.32 54.19 74.00 -19.81 41.35 34.67 9.93 31.76 0.00 110 53 PEAK 2 5466.32 53.70 68.20 -14.50 40.61 34.77 10.04 31.72 0.00 110 53 PEAK	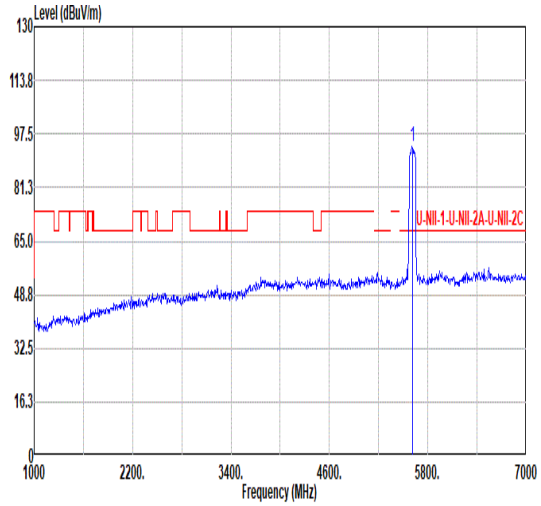 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 93.76 ------ ------ 80.57 34.60 10.24 31.65 0.00 110 53 PEAK
Avg	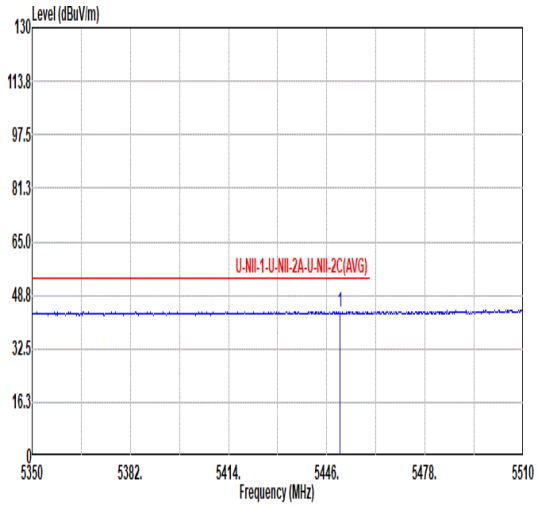 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.32 43.79 54.00 -10.21 30.71 34.80 10.01 31.73 0.00 110 53 AVERAGE	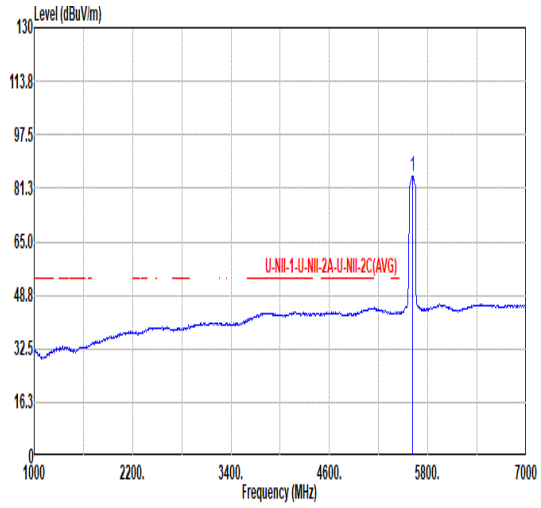 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 85.02 ------ ------ 71.80 34.60 10.26 31.64 0.00 110 53 AVERAGE

Mode	29	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
Pol.	Vertical	Fundamental
Peak	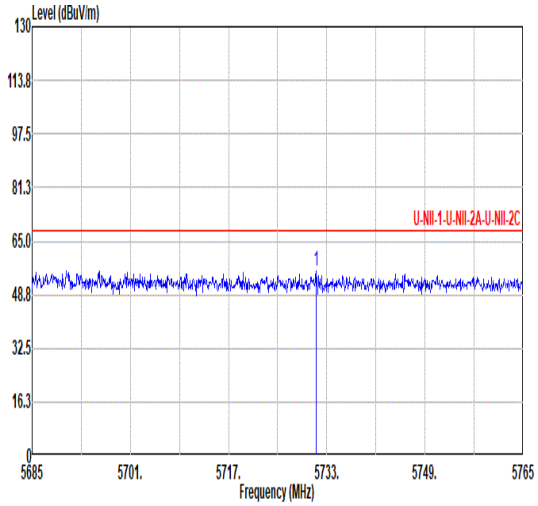 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5731.24 55.83 68.20 -12.37 42.74 34.60 10.35 31.86 0.00 110 53 PEAK	Blank

Mode	29	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
Pol.	Horizontal	Vertical
Peak Avg	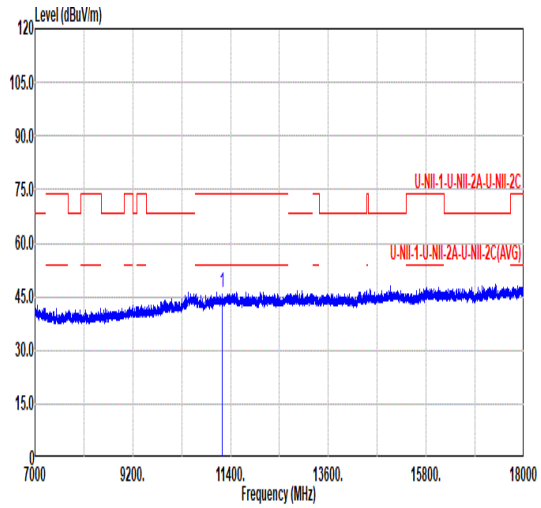 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.14 74.00 -27.86 57.86 38.00 14.72 64.44 0.00 --- --- PEAK	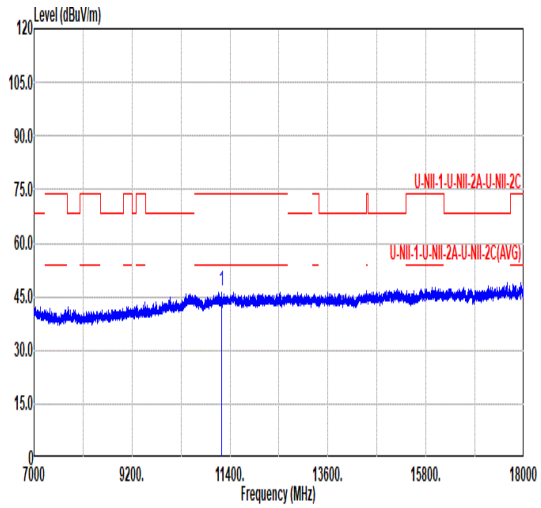 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 46.42 74.00 -27.58 58.14 38.00 14.72 64.44 0.00 --- --- PEAK

Mode	30	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
Pol.	Horizontal	Fundamental
Peak	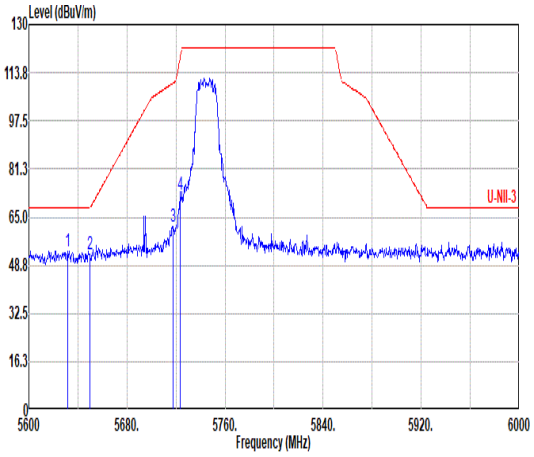 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5631.60 53.52 68.20 -14.68 40.54 34.46 10.34 31.82 0.00 100 276 PEAK 2 5650.00 52.52 68.20 -15.68 39.54 34.50 10.36 31.88 0.00 100 276 PEAK 3 5717.60 61.75 110.23 -48.48 48.77 34.54 10.42 31.98 0.00 100 276 PEAK 4 5723.20 72.75 118.20 -45.45 59.74 34.55 10.43 31.97 0.00 100 276 PEAK	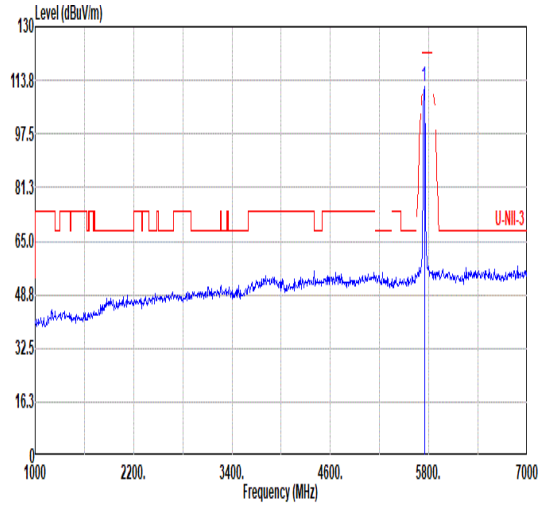 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 111.62 ------ ------ 98.48 34.59 10.45 31.90 0.00 100 276 PEAK
Avg	Blank	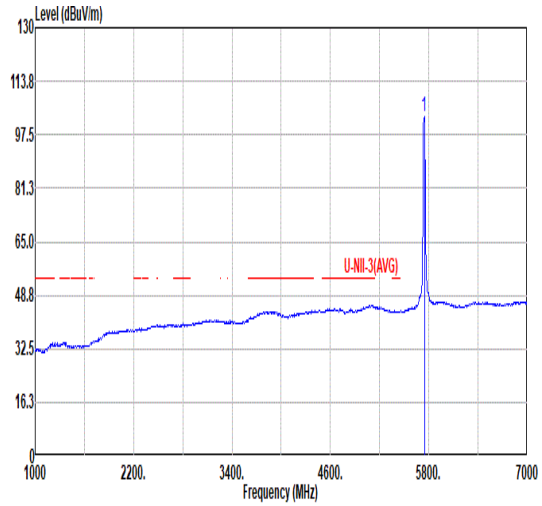 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 103.20 ------ ------ 90.06 34.59 10.45 31.90 0.00 100 276 AVERAGE

Mode	30	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
Pol.	Vertical	Fundamental
Peak	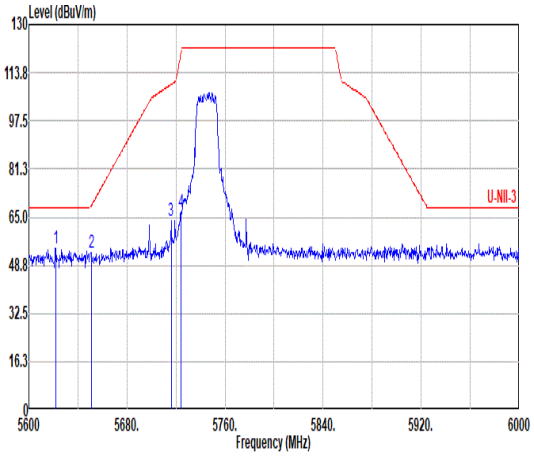 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5622.00 54.51 68.20 -13.69 41.54 34.44 10.33 31.80 0.00 300 79 PEAK 2 5650.80 53.16 68.80 -15.64 40.18 34.50 10.36 31.88 0.00 300 79 PEAK 3 5716.00 63.69 109.78 -46.09 50.73 34.53 10.42 31.99 0.00 300 79 PEAK 4 5724.00 66.55 120.02 -53.47 53.53 34.55 10.43 31.96 0.00 300 79 PEAK	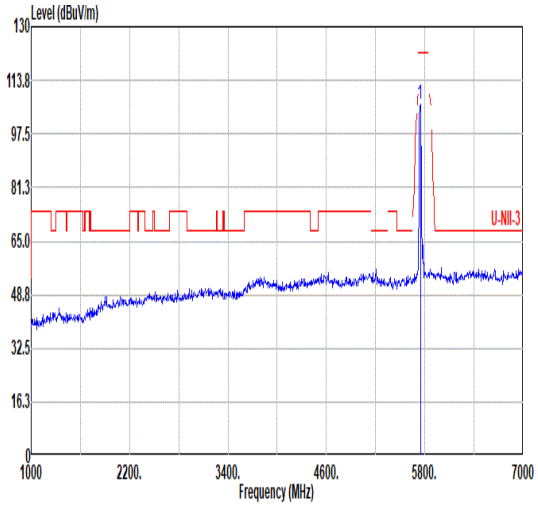 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 106.37 ------ ------ 93.23 34.59 10.45 31.90 0.00 300 79 PEAK
Avg	Blank	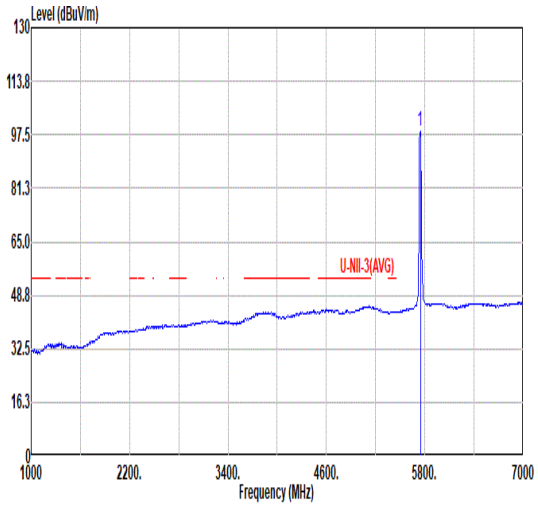 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 98.83 ------ ------ 85.69 34.59 10.45 31.90 0.00 300 79 AVERAGE

Mode	30	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz	
Pol.	Horizontal	Vertical
Peak Avg	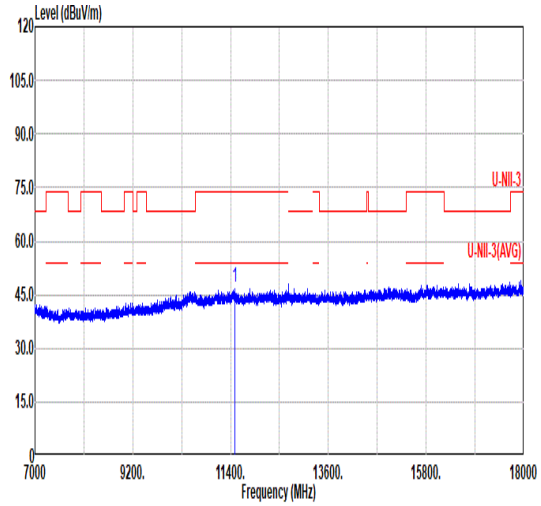 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 47.27 74.00 -26.73 58.29 38.19 14.91 64.12 0.00 --- --- PEAK	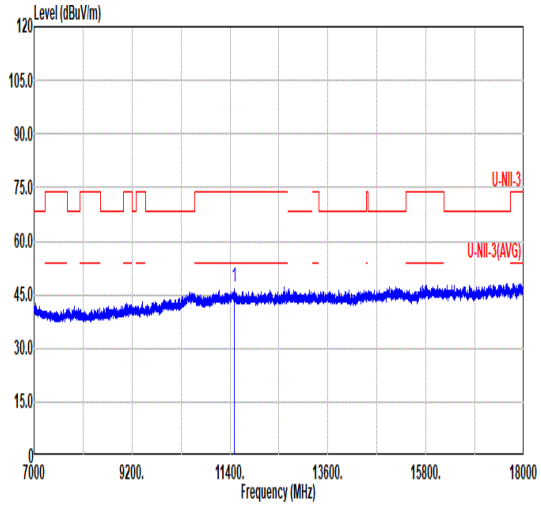 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 47.14 74.00 -26.86 58.16 38.19 14.91 64.12 0.00 --- --- PEAK

Mode	31	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz	
Pol.	Horizontal	Vertical
Peak Avg	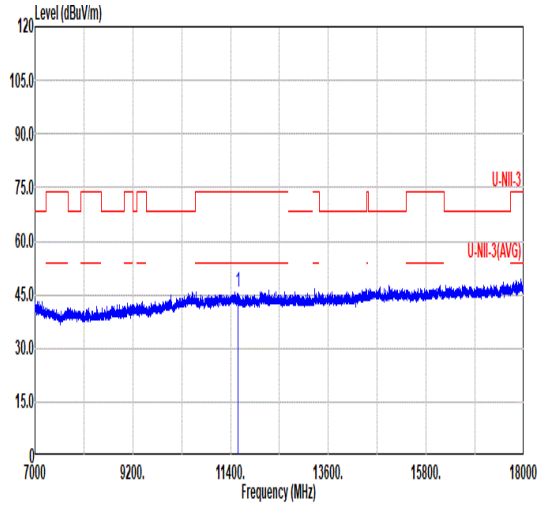 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.73 74.00 -28.27 57.23 38.07 14.66 64.23 0.00 --- --- PEAK	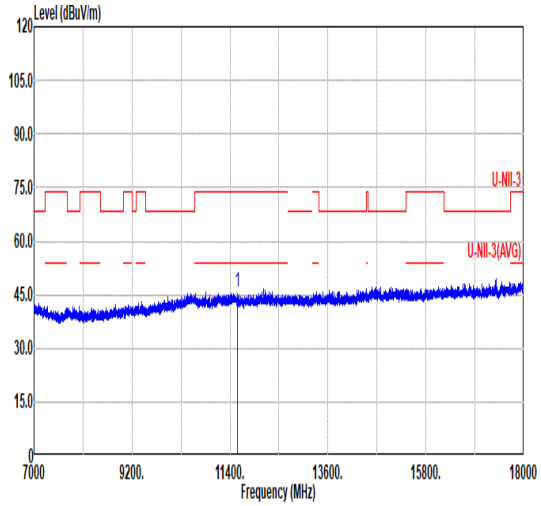 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.84 74.00 -28.16 57.34 38.07 14.66 64.23 0.00 --- --- PEAK

Mode	32	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
Pol.	Horizontal	Fundamental
Peak	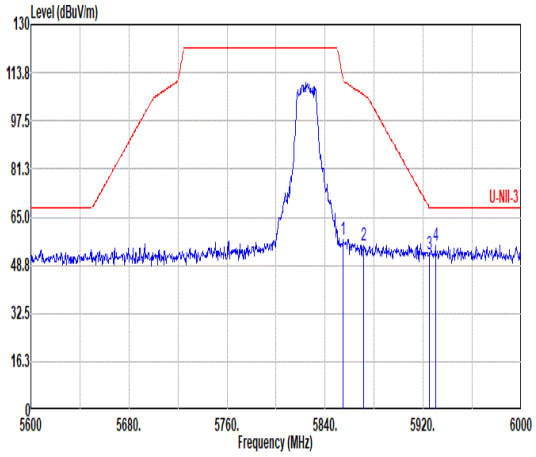 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 57.54 111.36 -53.82 44.02 34.83 10.53 31.84 0.00 113 91 PEAK 2 5871.60 55.32 106.25 -50.93 41.71 34.93 10.54 31.86 0.00 113 91 PEAK 3 5924.80 52.64 68.35 -15.71 38.81 35.15 10.56 31.88 0.00 113 91 PEAK 4 5930.00 55.37 68.20 -12.83 41.52 35.16 10.56 31.87 0.00 113 91 PEAK	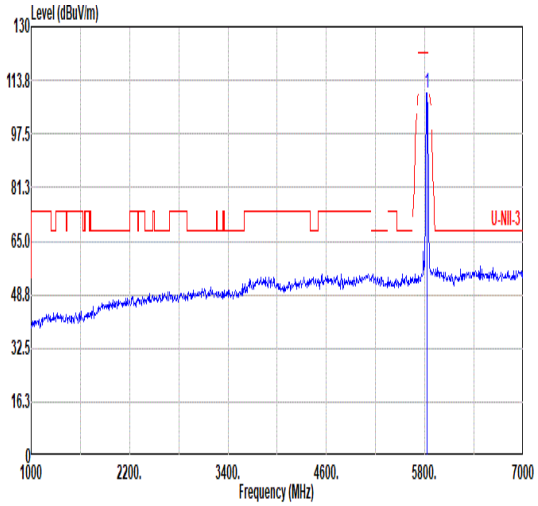 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 109.94 ------ ------ 96.41 34.80 10.51 31.78 0.00 113 91 PEAK
Avg	Blank	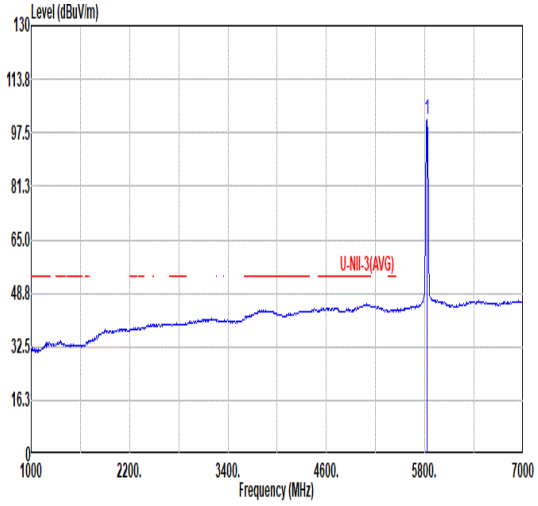 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 101.35 ------ ------ 87.83 34.80 10.51 31.79 0.00 113 91 AVERAGE

Mode	32	
	Band Edge	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
Pol.	Vertical	Fundamental
Peak	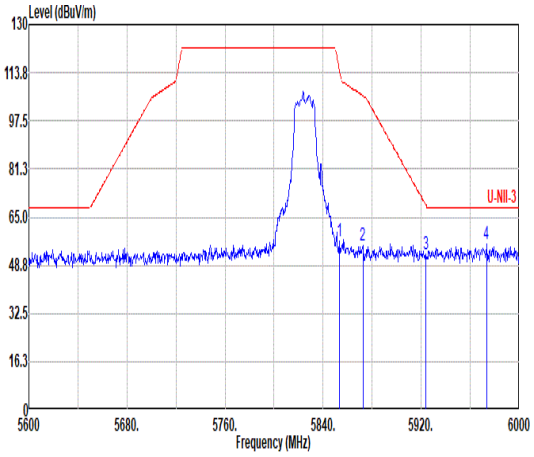 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.60 56.92 114.09 -57.17 43.41 34.82 10.53 31.84 0.00 312 75 PEAK 2 5872.40 55.54 106.03 -50.49 41.94 34.93 10.54 31.87 0.00 312 75 PEAK 3 5924.00 52.66 68.94 -16.28 38.83 35.15 10.56 31.88 0.00 312 75 PEAK 4 5973.20 55.98 68.20 -12.22 42.01 35.20 10.59 31.82 0.00 312 75 PEAK	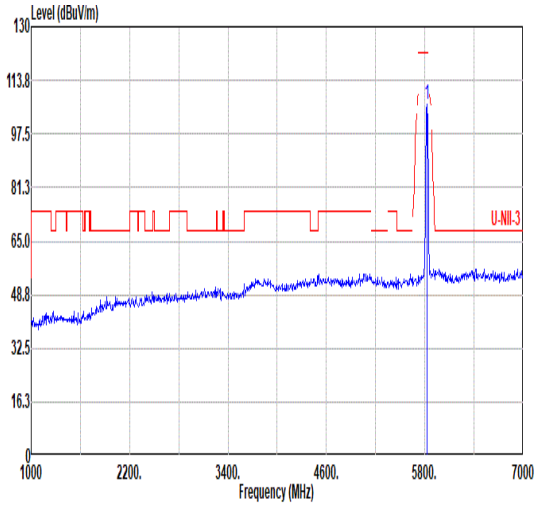 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 106.61 ------ ------ 93.09 34.80 10.51 31.79 0.00 312 75 PEAK
Avg	Blank	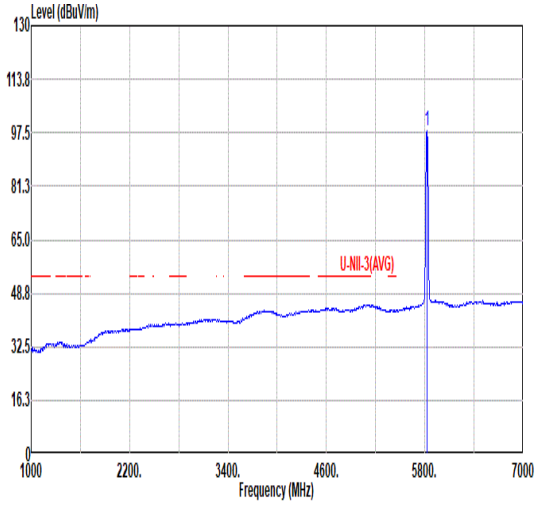 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.25 ------ ------ 84.73 34.80 10.51 31.79 0.00 312 75 AVERAGE

Mode	32	
	Harmonic	
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz	
Pol.	Horizontal	Vertical
Peak Avg	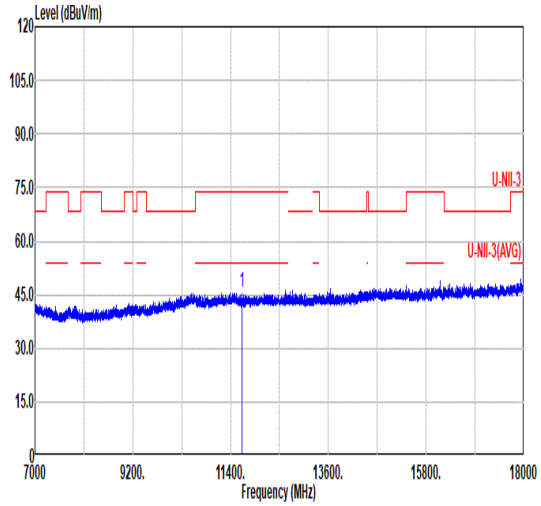 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.88 74.00 -28.12 57.28 38.25 14.71 64.36 0.00 --- --- PEAK	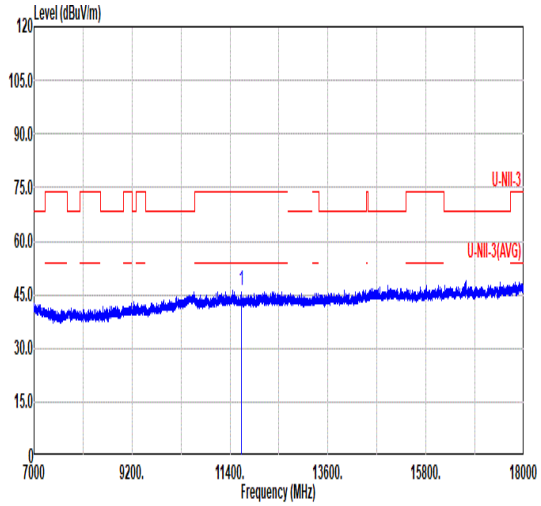 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 46.12 74.00 -27.88 57.52 38.25 14.71 64.36 0.00 --- --- PEAK

Mode	33	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
Pol.	Horizontal	Fundamental
Peak	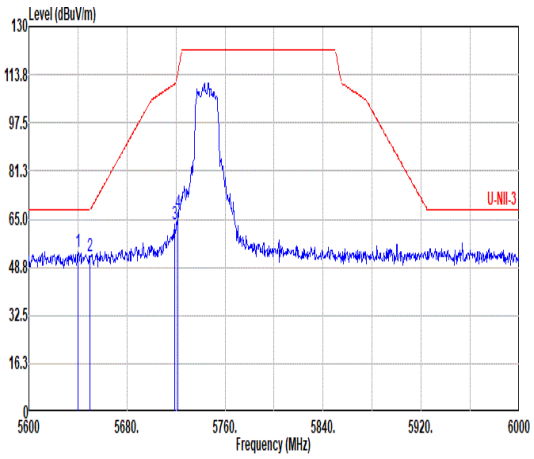 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.00 54.02 68.20 -14.18 41.04 34.48 10.35 31.85 0.00 100 272 PEAK 2 5650.00 52.40 68.20 -15.80 39.42 34.50 10.36 31.88 0.00 100 272 PEAK 3 5718.80 63.41 110.56 -47.15 50.43 34.54 10.42 31.98 0.00 100 272 PEAK 4 5721.60 67.20 114.55 -47.35 54.20 34.54 10.43 31.97 0.00 100 272 PEAK	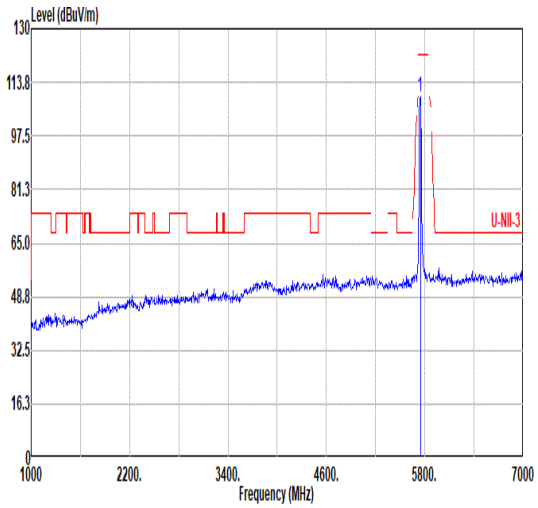 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 109.34 ------ ------ 96.20 34.59 10.45 31.90 0.00 100 272 PEAK
Avg	Blank	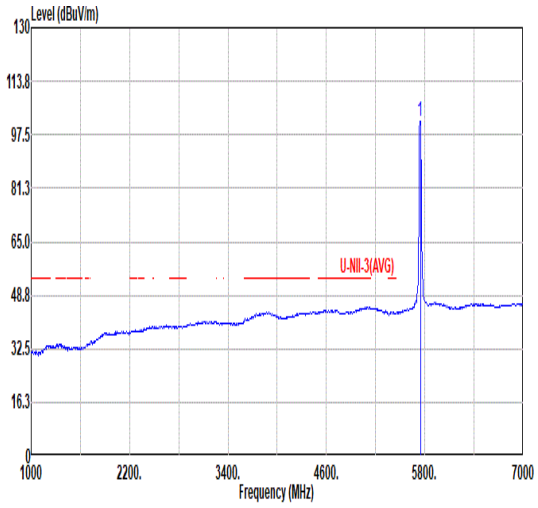 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 101.74 ------ ------ 88.60 34.59 10.45 31.90 0.00 100 272 AVERAGE

Mode	33	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
Pol.	Vertical	Fundamental
Peak	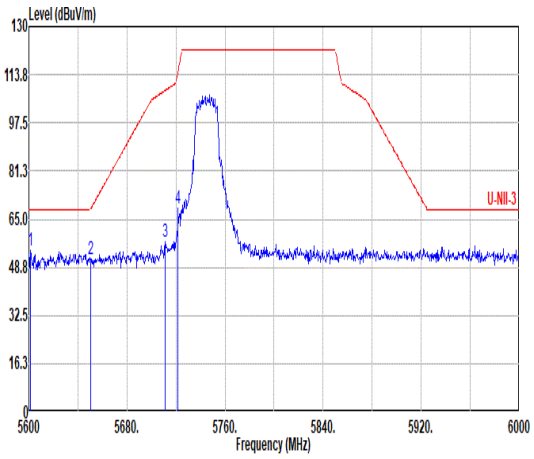 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5601.60 54.22 68.20 -13.98 41.24 34.40 10.31 31.73 0.00 300 79 PEAK 2 5650.40 51.74 68.50 -16.76 38.76 34.50 10.36 31.88 0.00 300 79 PEAK 3 5711.20 57.58 108.44 -50.86 44.64 34.52 10.42 32.00 0.00 300 79 PEAK 4 5721.60 68.50 114.55 -46.05 55.50 34.54 10.43 31.97 0.00 300 79 PEAK	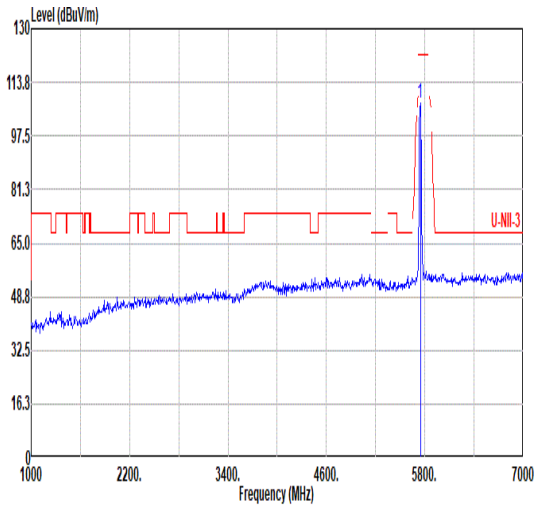 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 107.36 ------ ------ 94.22 34.59 10.45 31.90 0.00 300 79 PEAK
Avg	Blank	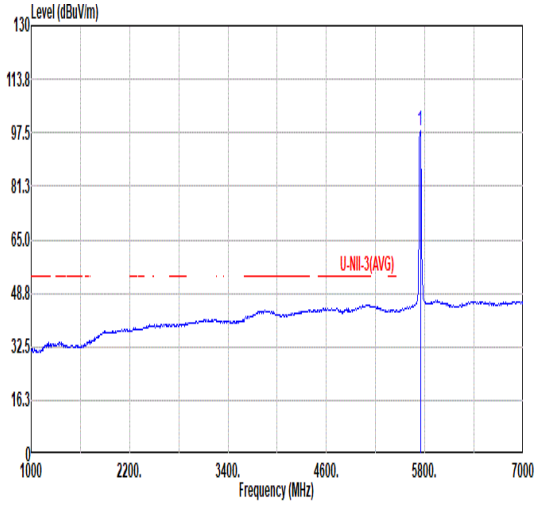 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5745.00 97.94 ------ ------ 84.80 34.59 10.45 31.90 0.00 300 79 AVERAGE

Mode	33	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz	
Pol.	Horizontal	Vertical
Peak Avg	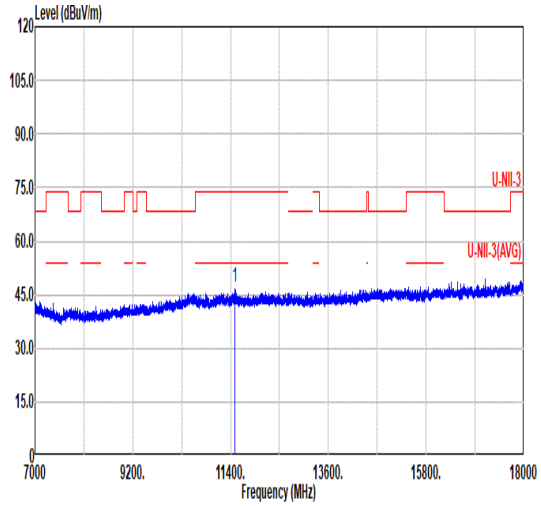 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.88 74.00 -27.12 58.41 37.99 14.60 64.12 0.00 --- --- PEAK	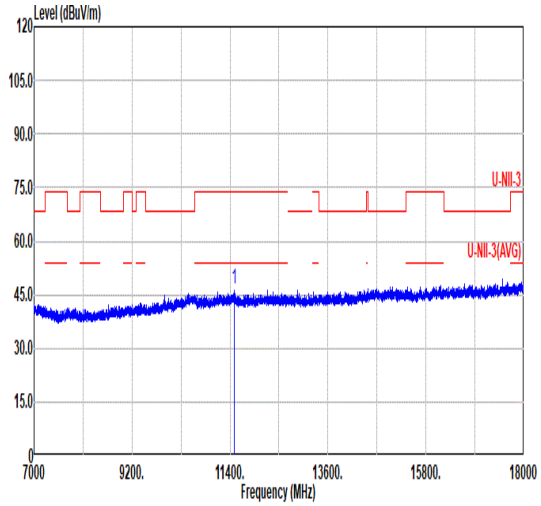 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11490.00 46.72 74.00 -27.28 58.25 37.99 14.60 64.12 0.00 --- --- PEAK

Mode	34	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz	
Pol.	Horizontal	Vertical
Peak Avg	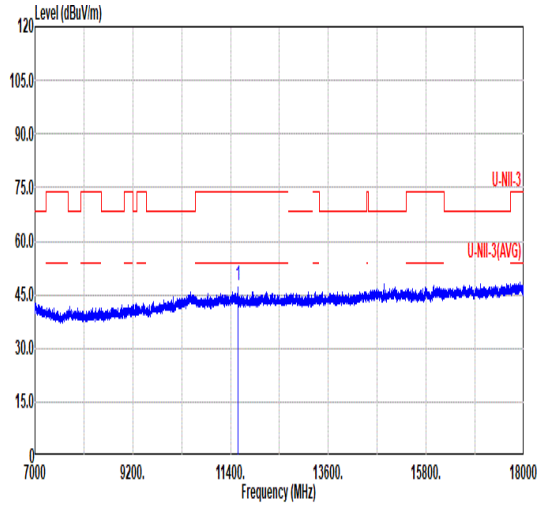 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 47.34 74.00 -26.66 58.84 38.07 14.66 64.23 0.00 --- --- PEAK	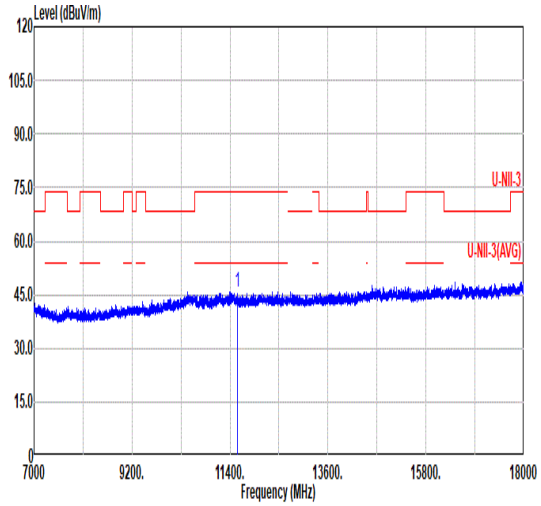 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11570.00 45.61 74.00 -28.39 57.11 38.07 14.66 64.23 0.00 --- --- PEAK

Mode	35	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
Pol.	Horizontal	Fundamental
Peak	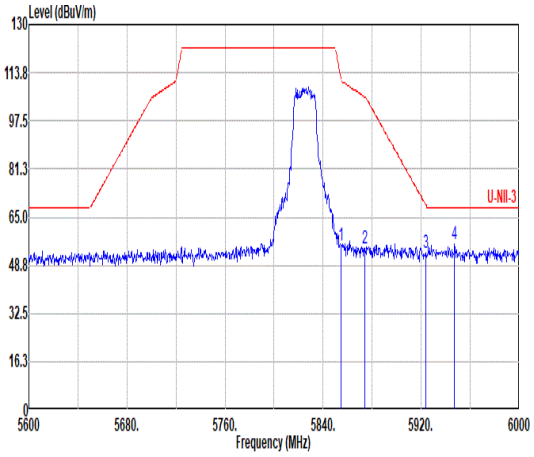 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 55.39 111.36 -55.97 41.87 34.83 10.53 31.84 0.00 113 91 PEAK 2 5874.00 54.26 105.58 -51.32 40.65 34.94 10.54 31.87 0.00 113 91 PEAK 3 5924.00 52.90 68.94 -16.04 39.07 35.15 10.56 31.88 0.00 113 91 PEAK 4 5947.20 55.78 68.20 -12.42 41.87 35.19 10.57 31.85 0.00 113 91 PEAK	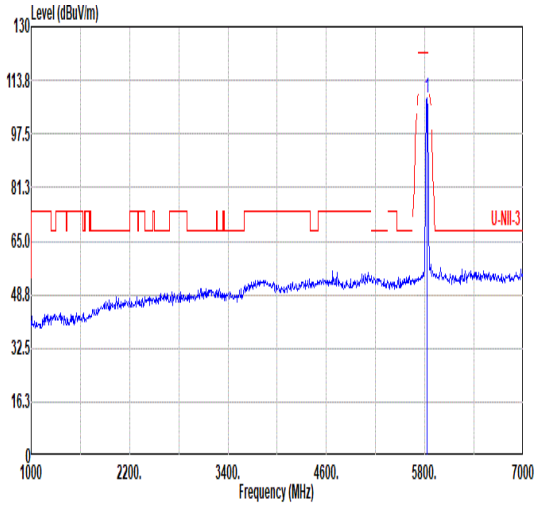 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 108.34 ------ ------ 94.82 34.80 10.51 31.79 0.00 113 91 PEAK
Avg	Blank	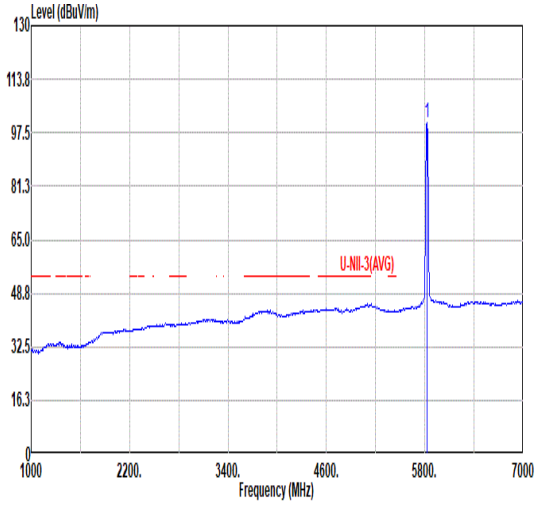 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 100.60 ------ ------ 87.08 34.80 10.51 31.79 0.00 113 91 AVERAGE

Mode	35	
	Band Edge	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
Pol.	Vertical	Fundamental
Peak	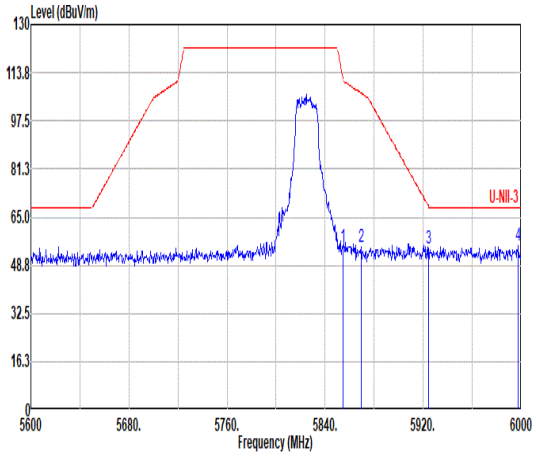 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 54.90 111.36 -56.46 41.38 34.83 10.53 31.84 0.00 311 77 PEAK 2 5869.20 54.77 106.92 -52.15 41.18 34.92 10.53 31.86 0.00 311 77 PEAK 3 5924.40 54.67 68.64 -13.97 40.84 35.15 10.56 31.88 0.00 311 77 PEAK 4 5997.60 55.38 68.20 -12.82 41.37 35.20 10.60 31.79 0.00 311 77 PEAK	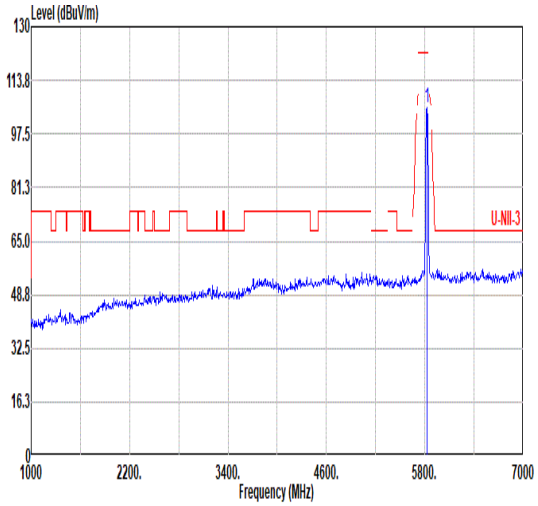 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 105.65 ------ ------ 92.13 34.80 10.51 31.79 0.00 311 77 PEAK
Avg	Blank	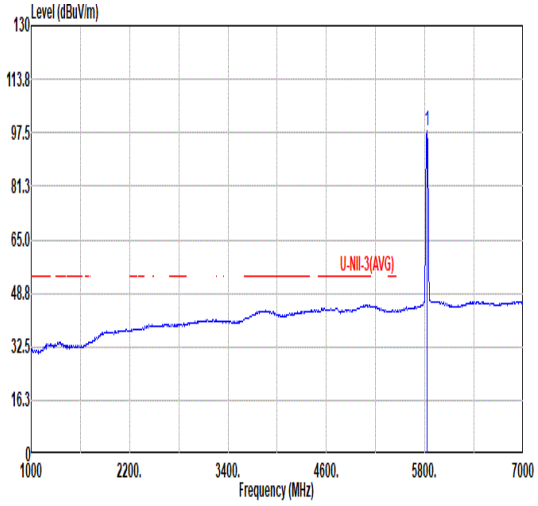 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5825.00 98.00 ------ ------ 84.48 34.80 10.51 31.79 0.00 311 77 AVERAGE

Mode	35	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz	
Pol.	Horizontal	Vertical
Peak Avg	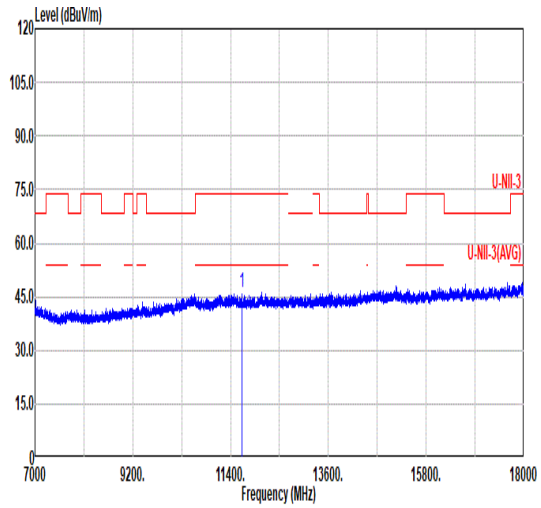 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 46.13 74.00 -27.87 57.53 38.25 14.71 64.36 0.00 --- --- PEAK	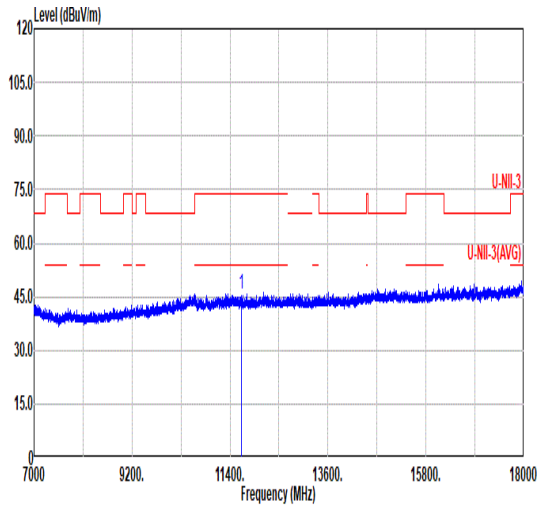 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11650.00 45.68 74.00 -28.32 57.08 38.25 14.71 64.36 0.00 --- --- PEAK

Mode	36	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
Pol.	Horizontal	Fundamental
Peak	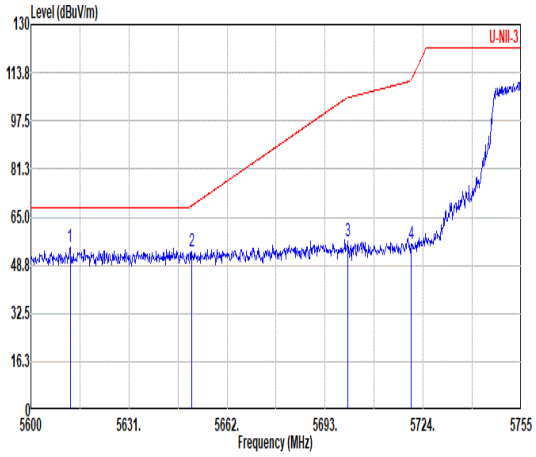 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5612.40 55.06 68.20 -13.14 42.09 34.42 10.32 31.77 0.00 102 93 PEAK 2 5650.84 53.51 68.83 -15.32 40.53 34.50 10.36 31.88 0.00 102 93 PEAK 3 5700.29 56.72 105.38 -48.66 43.84 34.50 10.41 32.03 0.00 102 93 PEAK 4 5720.13 55.72 111.19 -55.47 42.73 34.54 10.42 31.97 0.00 102 93 PEAK	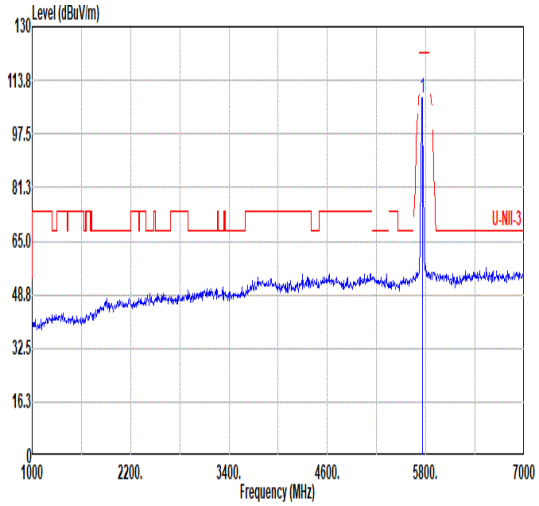 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 108.24 ------ ------ 95.06 34.61 10.45 31.88 0.00 102 93 PEAK
Avg	Blank	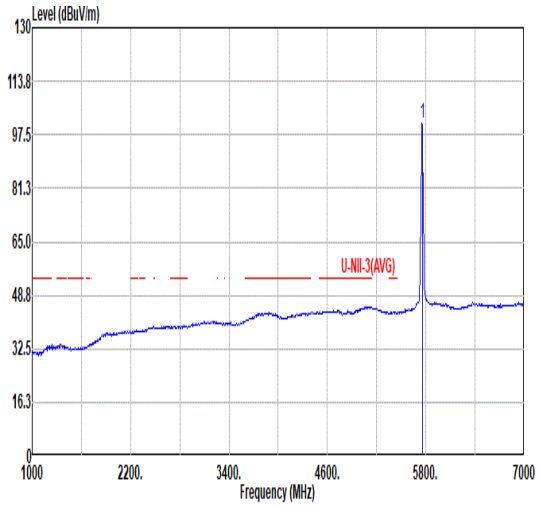 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 100.97 ------ ------ 87.79 34.61 10.45 31.88 0.00 102 93 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
Pol.	Horizontal	Fundamental
Peak	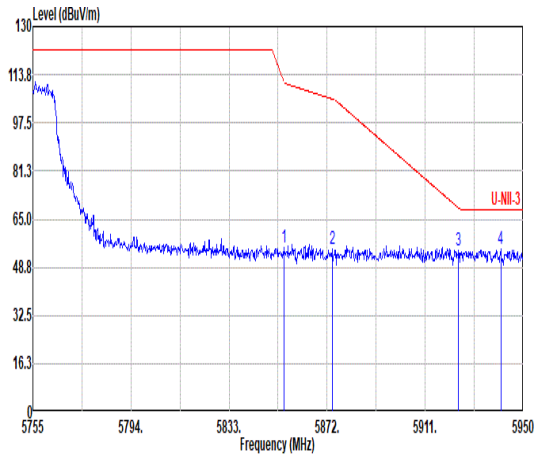 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 55.46 111.26 -55.80 41.94 34.83 10.53 31.84 0.00 102 93 PEAK 2 5873.95 55.13 105.59 -50.46 41.52 34.94 10.54 31.87 0.00 102 93 PEAK 3 5924.26 54.26 68.75 -14.49 40.43 35.15 10.56 31.88 0.00 102 93 PEAK 4 5941.03 55.12 68.20 -13.08 41.23 35.18 10.57 31.86 0.00 102 93 PEAK	Blank

Mode	36	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
Pol.	Vertical	Fundamental
Peak	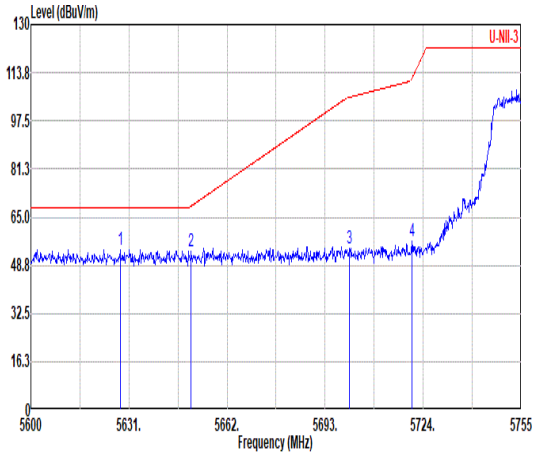 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5628.21 54.19 68.20 -14.01 41.20 34.46 10.34 31.81 0.00 302 76 PEAK 2 5650.69 53.26 68.71 -15.45 40.28 34.50 10.36 31.88 0.00 302 76 PEAK 3 5700.60 54.69 105.47 -50.78 41.81 34.50 10.41 32.03 0.00 302 76 PEAK 4 5720.44 57.04 111.89 -54.85 44.05 34.54 10.42 31.97 0.00 302 76 PEAK	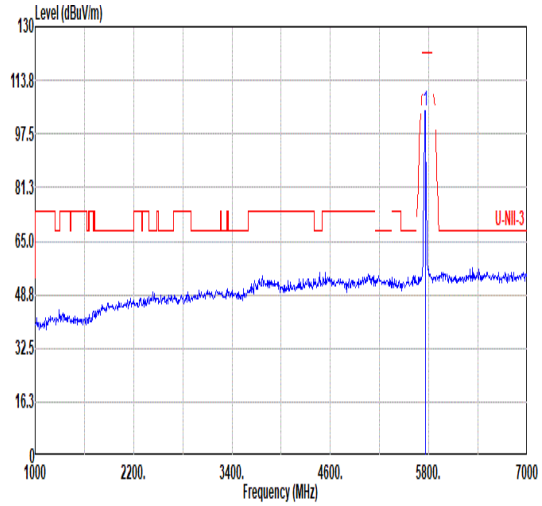 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 104.73 ------ ------ 91.55 34.61 10.45 31.88 0.00 302 76 PEAK
Avg	Blank	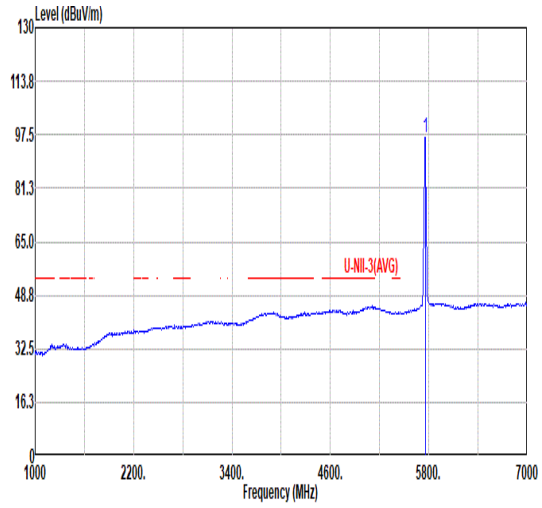 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5755.00 96.86 ------ ------ 83.68 34.61 10.45 31.88 0.00 302 76 AVERAGE

Mode	36	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
Pol.	Vertical	Fundamental
Peak	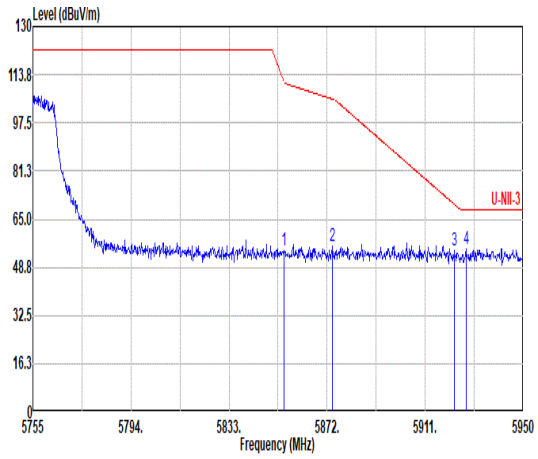 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.84 54.22 111.26 -57.04 40.70 34.83 10.53 31.84 0.00 302 76 PEAK 2 5873.95 55.92 105.59 -49.67 42.31 34.94 10.54 31.87 0.00 302 76 PEAK 3 5922.51 54.37 70.04 -15.67 40.54 35.15 10.56 31.88 0.00 302 76 PEAK 4 5927.19 54.86 68.20 -13.34 41.03 35.15 10.56 31.88 0.00 302 76 PEAK	Blank

Mode	36	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz	
Pol.	Horizontal	Vertical
Peak Avg	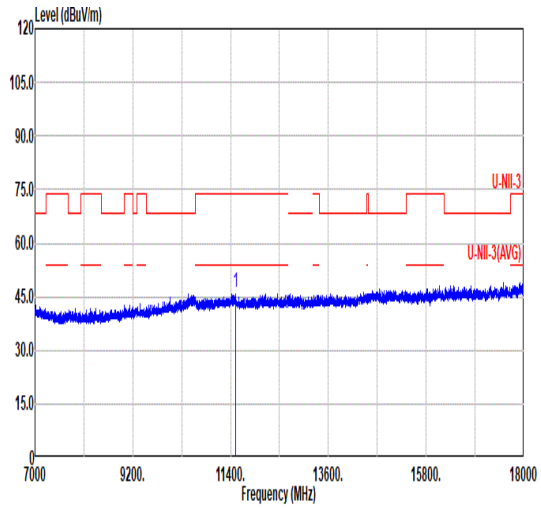 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 46.32 74.00 -27.68 57.83 38.01 14.61 64.13 0.00 --- --- PEAK	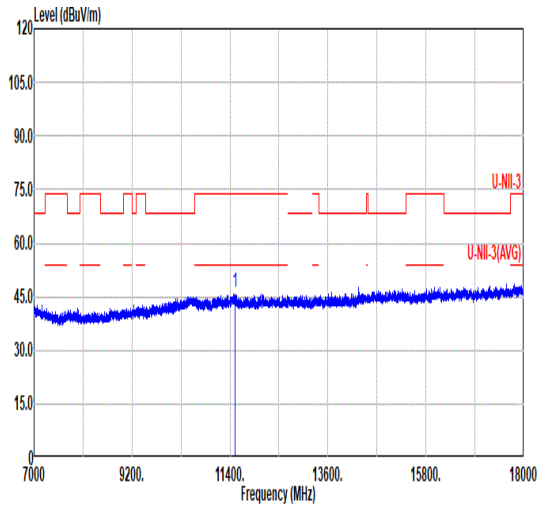 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11510.00 46.28 74.00 -27.72 57.79 38.01 14.61 64.13 0.00 --- --- PEAK

Mode	37	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Horizontal	Fundamental
Peak	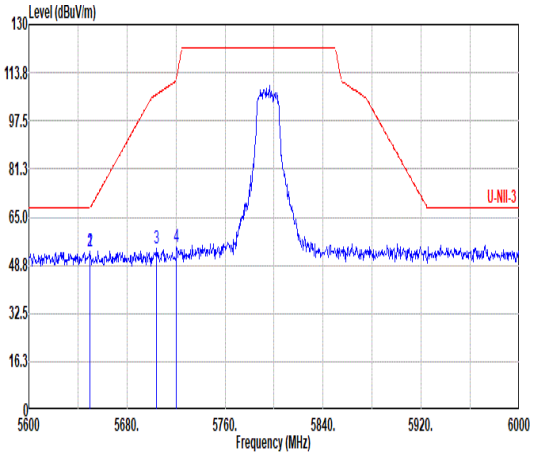 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5650.00 53.44 68.20 -14.76 40.46 34.50 10.36 31.88 0.00 100 273 PEAK 2 5650.00 53.44 68.20 -14.76 40.46 34.50 10.36 31.88 0.00 100 273 PEAK 3 5704.00 54.22 106.42 -52.20 41.32 34.51 10.41 32.02 0.00 100 273 PEAK 4 5720.40 54.74 111.81 -57.07 41.75 34.54 10.42 31.97 0.00 100 273 PEAK	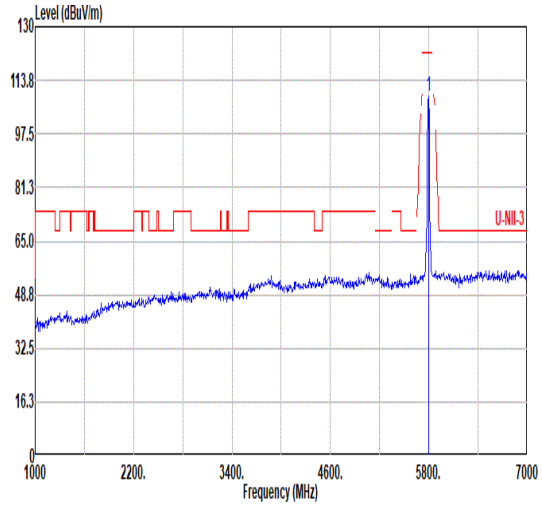 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 108.85 ------ ------ 95.35 34.78 10.49 31.77 0.00 100 273 PEAK
Avg	Blank	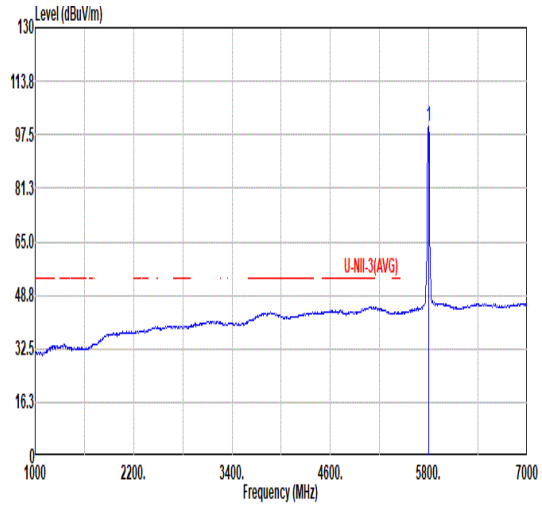 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 100.15 ------ ------ 86.65 34.78 10.49 31.77 0.00 100 273 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Horizontal	Fundamental
Peak	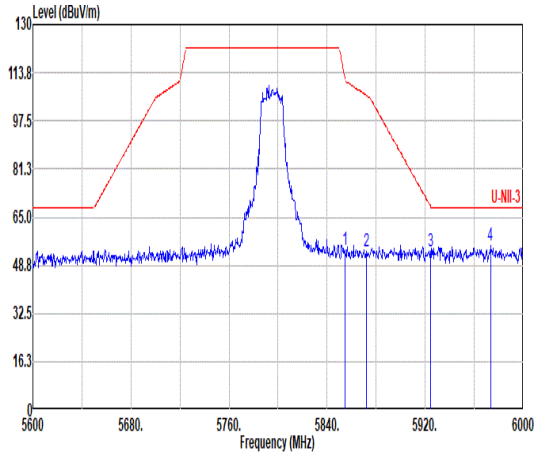 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.40 54.03 112.27 -58.24 40.51 34.83 10.53 31.84 0.00 100 273 PEAK 2 5872.00 53.53 106.14 -52.61 39.93 34.93 10.54 31.87 0.00 100 273 PEAK 3 5924.40 53.62 68.64 -15.02 39.79 35.15 10.56 31.88 0.00 100 273 PEAK 4 5973.20 55.55 68.20 -12.65 41.58 35.20 10.59 31.82 0.00 100 273 PEAK	Blank

Mode	37	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Vertical	Fundamental
Peak	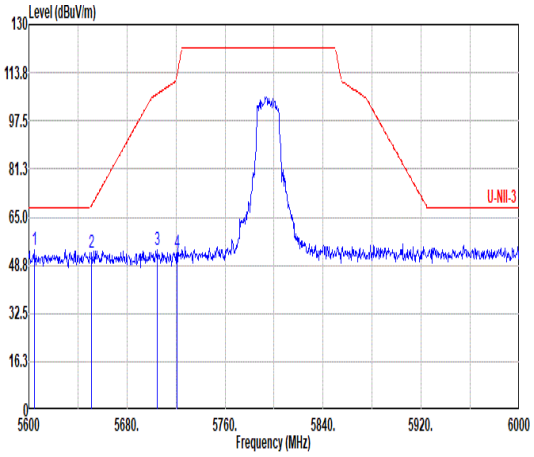 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5604.40 53.94 68.20 -14.26 40.96 34.41 10.31 31.74 0.00 280 79 PEAK 2 5651.20 53.20 69.09 -15.89 40.22 34.50 10.36 31.88 0.00 280 79 PEAK 3 5704.80 53.94 106.65 -52.71 41.04 34.51 10.41 32.02 0.00 280 79 PEAK 4 5720.80 53.06 112.72 -59.66 40.07 34.54 10.42 31.97 0.00 280 79 PEAK	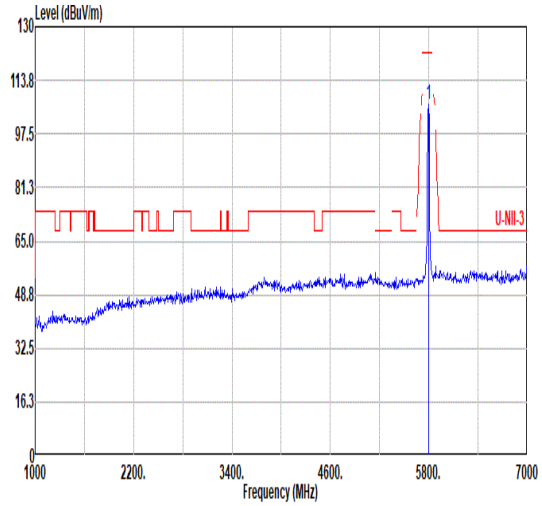 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 106.57 ------ ------ 93.07 34.78 10.49 31.77 0.00 280 79 PEAK
Avg	Blank	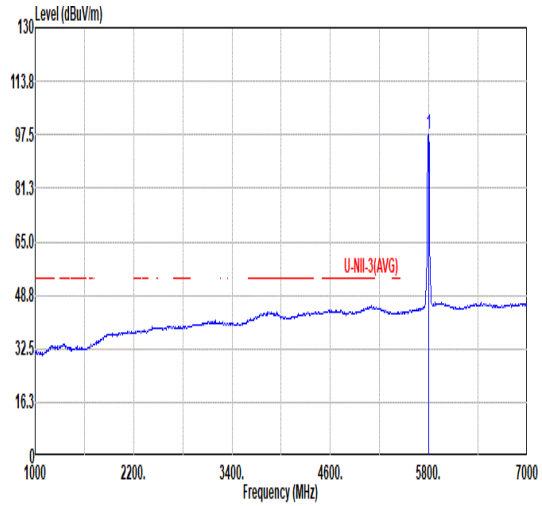 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5795.00 97.38 ------ ------ 83.88 34.78 10.49 31.77 0.00 280 79 AVERAGE

Mode	37	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Vertical	Fundamental
Peak	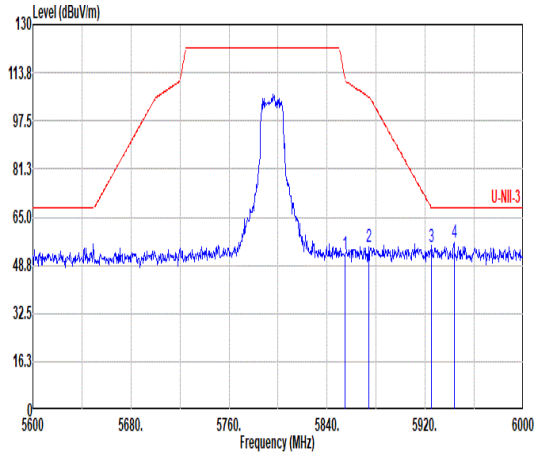 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 52.73 111.36 -58.63 39.21 34.83 10.53 31.84 0.00 280 79 PEAK 2 5874.00 54.90 105.58 -50.68 41.29 34.94 10.54 31.87 0.00 280 79 PEAK 3 5924.80 55.17 68.35 -13.18 41.34 35.15 10.56 31.88 0.00 280 79 PEAK 4 5943.60 56.49 68.20 -11.71 42.59 35.19 10.57 31.86 0.00 280 79 PEAK	Blank

Mode	37	
	Harmonic	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Horizontal	Vertical
Peak Avg	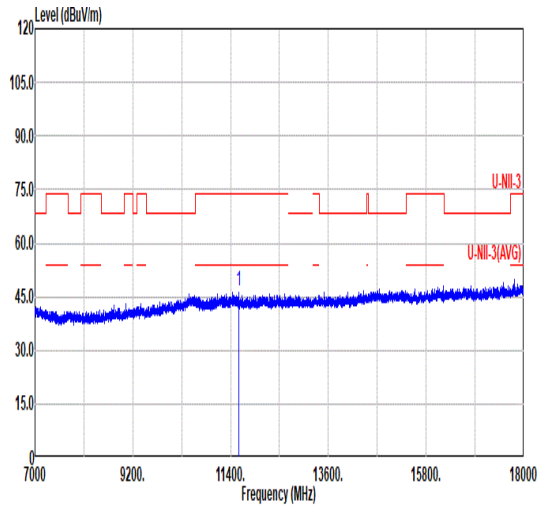 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 46.47 74.00 -27.53 57.97 38.09 14.67 64.26 0.00 --- --- PEAK	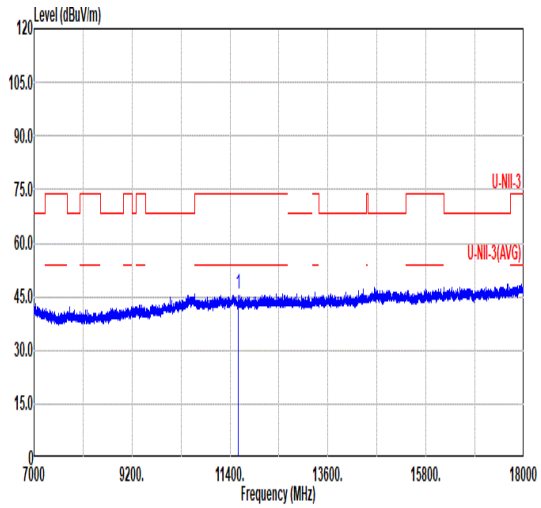 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11590.00 45.85 74.00 -28.15 57.35 38.09 14.67 64.26 0.00 --- --- PEAK

Mode	37	
	18G-40G	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Horizontal	Vertical
Peak Avg	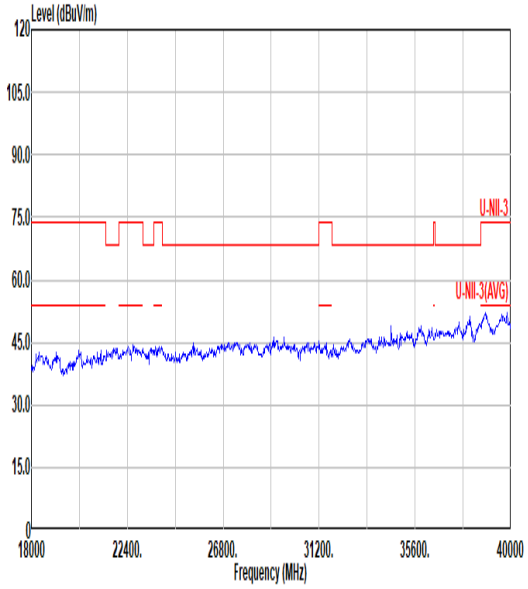	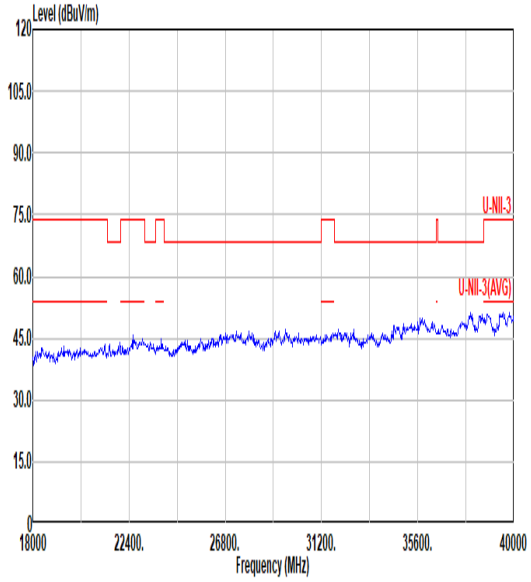

Mode	37	
	30-1G	
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz	
Pol.	Horizontal	Vertical
Peak	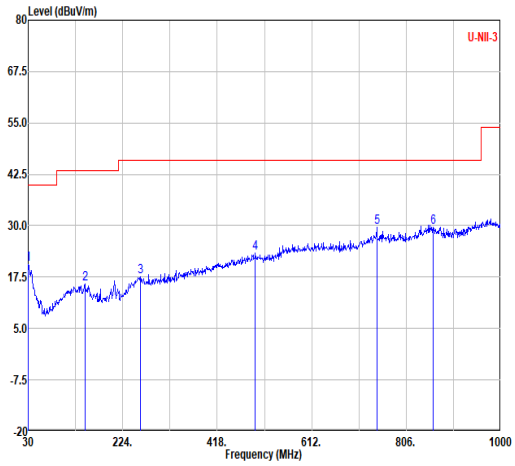	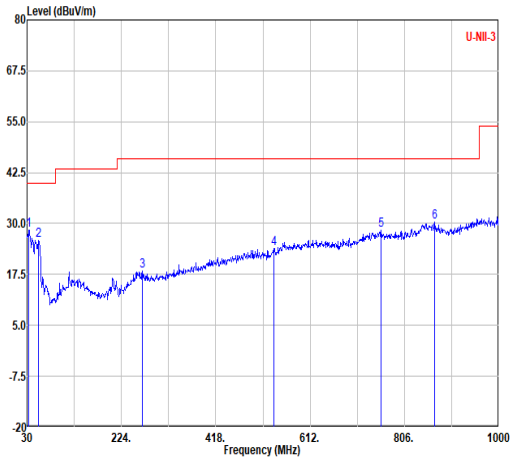

Horizontal:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	20.67	40.00	-19.33	26.91	25.14	0.83	32.21	--	--	Peak
2	146.40	15.89	43.50	-27.61	28.88	17.23	1.84	32.06	--	--	Peak
3	259.89	17.72	46.00	-28.28	27.39	19.78	2.47	31.92	--	--	Peak
4	496.57	23.28	46.00	-22.72	28.25	23.73	3.40	32.10	--	--	Peak
5	745.86	29.68	46.00	-16.32	29.23	28.09	4.16	31.80	--	--	Peak
6	861.29	29.72	46.00	-16.28	27.06	29.68	4.45	31.47	--	--	Peak

Vertical:

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	33.88	28.33	40.00	-11.67	36.75	22.89	0.89	32.20	--	--	Peak
2	53.28	25.84	40.00	-14.16	43.85	12.95	1.11	32.07	--	--	Peak
3	266.68	18.29	46.00	-27.71	28.61	19.17	2.50	31.99	--	--	Peak
4	537.31	23.80	46.00	-22.20	28.17	24.48	3.53	32.38	--	--	Peak
5	758.47	28.40	46.00	-17.60	27.94	28.00	4.20	31.74	--	--	Peak
6	868.08	30.28	46.00	-15.72	27.91	29.36	4.47	31.46	--	--	Peak

Mode	38	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
Pol.	Horizontal	Fundamental
Peak	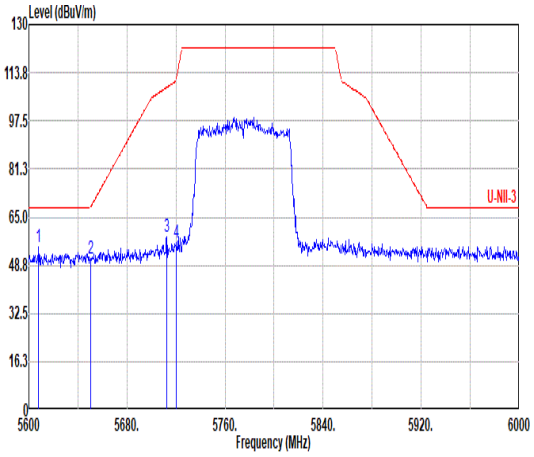 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5608.00 54.80 68.20 -13.40 41.81 34.42 10.32 31.75 0.00 106 273 PEAK 2 5650.40 51.24 68.50 -17.26 38.26 34.50 10.36 31.88 0.00 106 273 PEAK 3 5712.40 58.32 108.77 -50.45 45.38 34.52 10.42 32.00 0.00 106 273 PEAK 4 5720.40 56.51 111.81 -55.30 43.52 34.54 10.42 31.97 0.00 106 273 PEAK	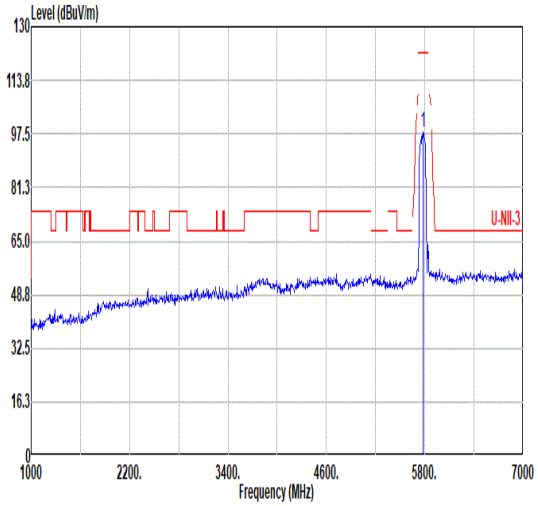 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 97.88 ------ ------ 84.47 34.73 10.48 31.80 0.00 106 273 PEAK
Avg	Blank	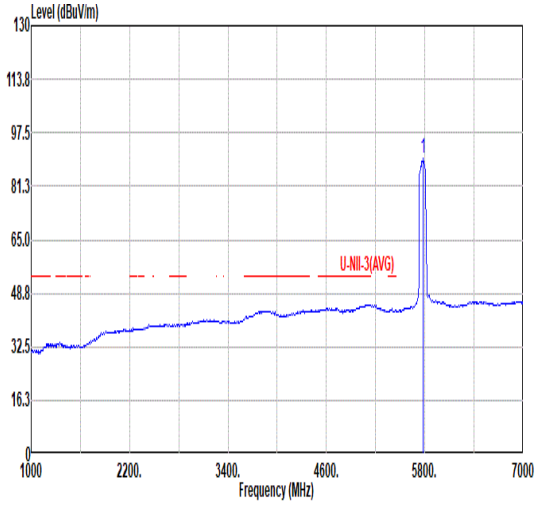 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 89.67 ------ ------ 76.26 34.73 10.48 31.80 0.00 106 273 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
Pol.	Horizontal	Fundamental
Peak	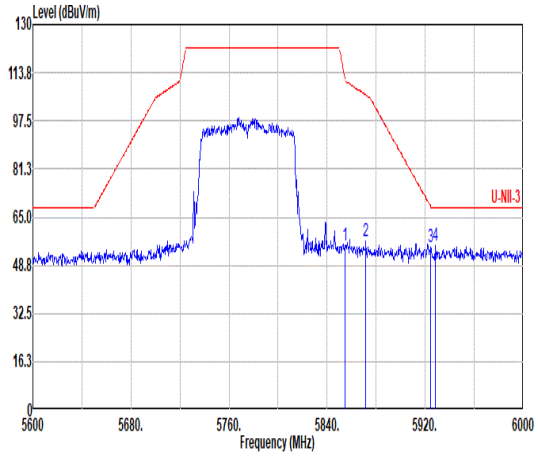 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 55.28 111.36 -56.08 41.76 34.83 10.53 31.84 0.00 106 273 PEAK 2 5871.60 56.75 106.25 -49.50 43.14 34.93 10.54 31.86 0.00 106 273 PEAK 3 5924.40 54.86 68.64 -13.78 41.03 35.15 10.56 31.88 0.00 106 273 PEAK 4 5928.40 55.66 68.20 -12.54 41.82 35.16 10.56 31.88 0.00 106 273 PEAK	Blank

Mode	38	
	Band Edge - L	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
Pol.	Vertical	Fundamental
Peak	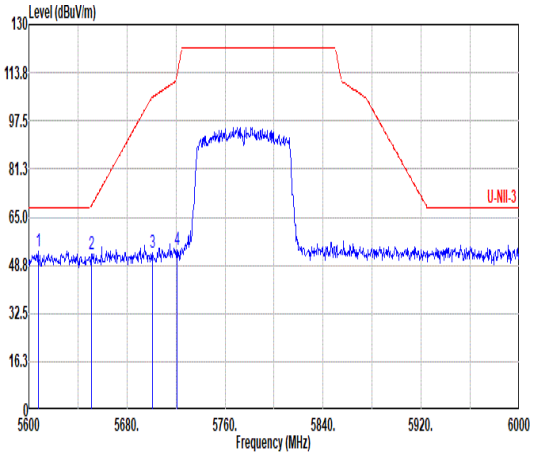 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5607.60 53.53 68.20 -14.67 40.54 34.42 10.32 31.75 0.00 282 79 PEAK 2 5650.80 52.58 68.00 -16.22 39.60 34.50 10.36 31.88 0.00 282 79 PEAK 3 5700.80 53.15 105.52 -52.37 40.27 34.50 10.41 32.03 0.00 282 79 PEAK 4 5720.80 53.87 112.72 -58.85 40.88 34.54 10.42 31.97 0.00 282 79 PEAK	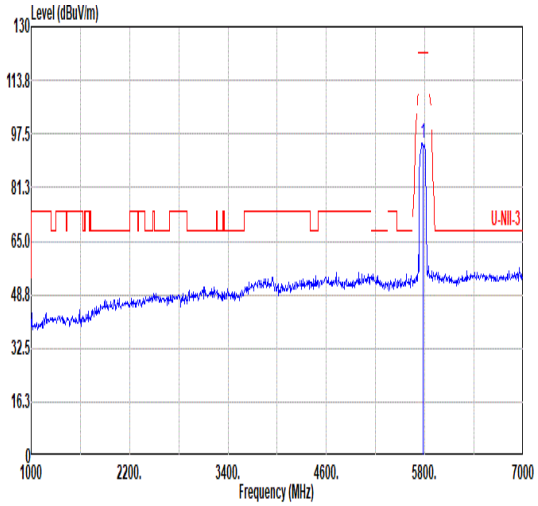 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 94.66 ------ ------ 81.34 34.68 10.47 31.83 0.00 282 79 PEAK
Avg	Blank	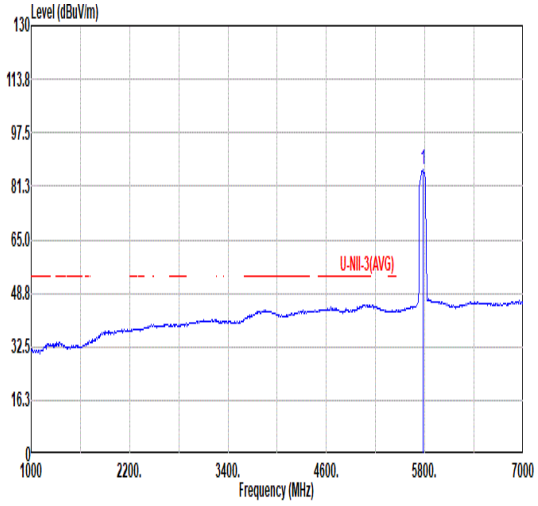 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5775.00 86.15 ------ ------ 72.79 34.70 10.48 31.82 0.00 282 79 AVERAGE

Mode	38	
	Band Edge - R	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
Pol.	Vertical	Fundamental
Peak	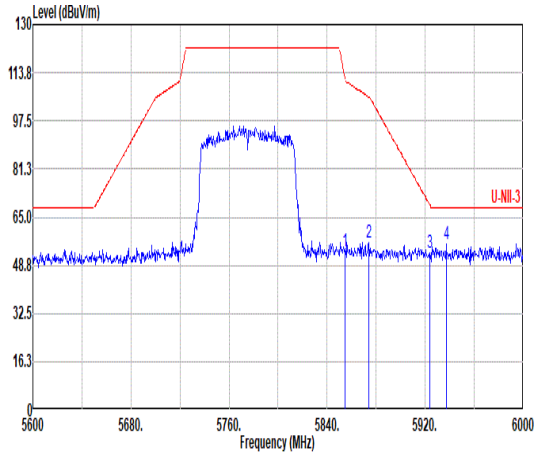 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5854.80 53.55 111.36 -57.81 40.03 34.83 10.53 31.84 0.00 282 79 PEAK 2 5874.00 56.20 105.58 -49.38 42.59 34.94 10.54 31.87 0.00 282 79 PEAK 3 5924.00 53.17 68.94 -15.77 39.34 35.15 10.56 31.88 0.00 282 79 PEAK 4 5937.20 55.75 68.20 -12.45 41.88 35.17 10.57 31.87 0.00 282 79 PEAK	Blank

Mode	38	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz	
Pol.	Horizontal	Vertical
Peak Avg	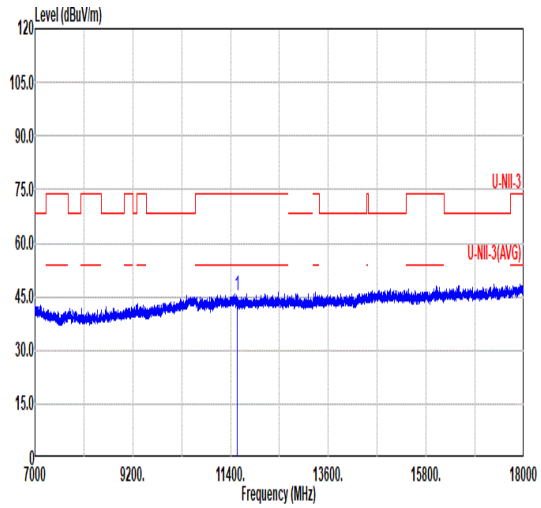 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 45.39 74.00 -28.61 56.89 38.05 14.64 64.19 0.00 --- --- PEAK	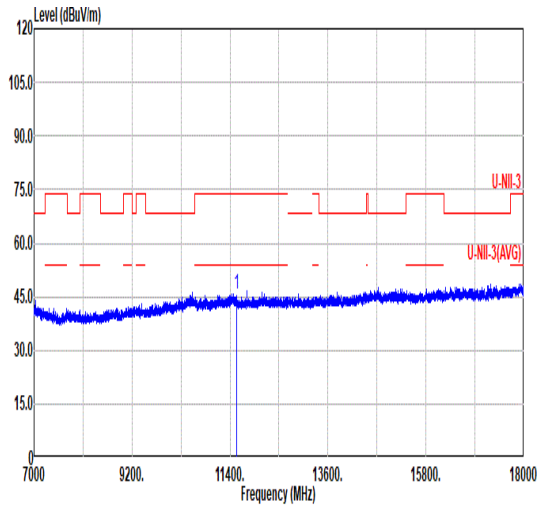 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11550.00 45.92 74.00 -28.08 57.42 38.05 14.64 64.19 0.00 --- --- PEAK

Mode	39	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz	
Pol.	Horizontal	Vertical
Peak Avg	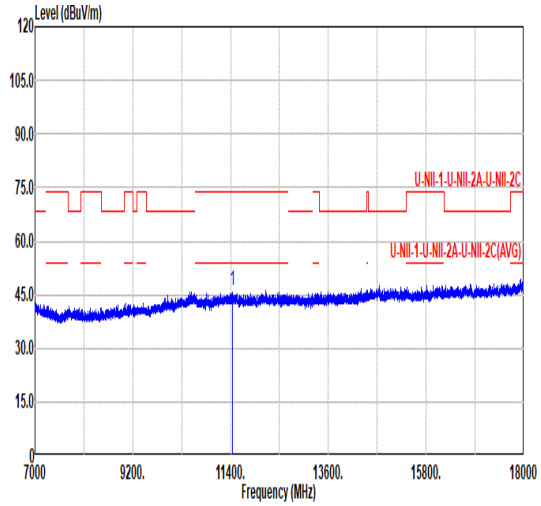 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.17 74.00 -27.83 57.85 37.94 14.56 64.18 0.00 --- --- PEAK	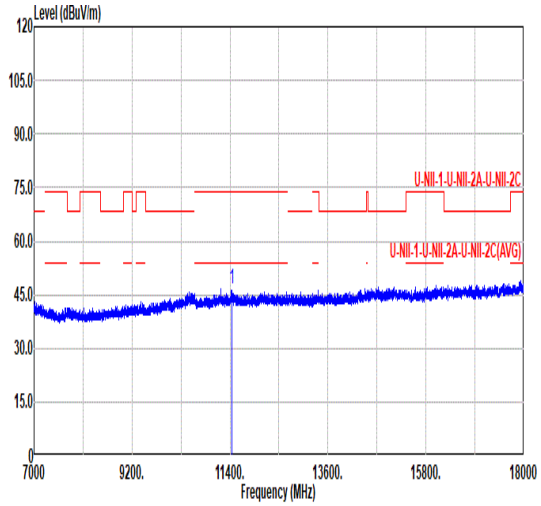 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.55 74.00 -27.45 58.23 37.94 14.56 64.18 0.00 --- --- PEAK

Mode	40	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH144_5720MHz	
Pol.	Horizontal	Vertical
Peak Avg	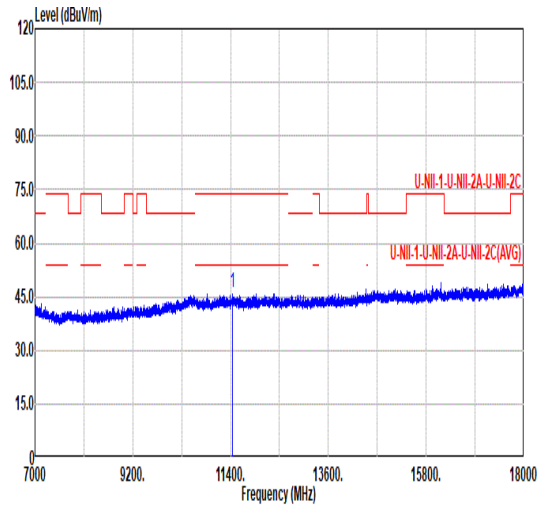 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.32 74.00 -27.68 58.00 37.94 14.56 64.18 0.00 --- --- PEAK	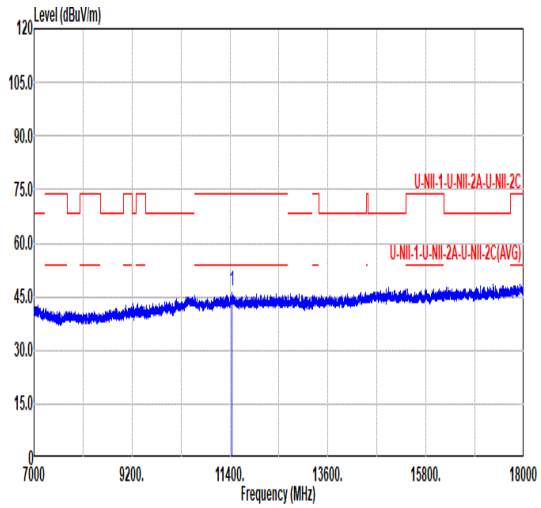 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 46.44 74.00 -27.56 58.12 37.94 14.56 64.18 0.00 --- --- PEAK

Mode	41	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
Pol.	Horizontal	Vertical
Peak Avg	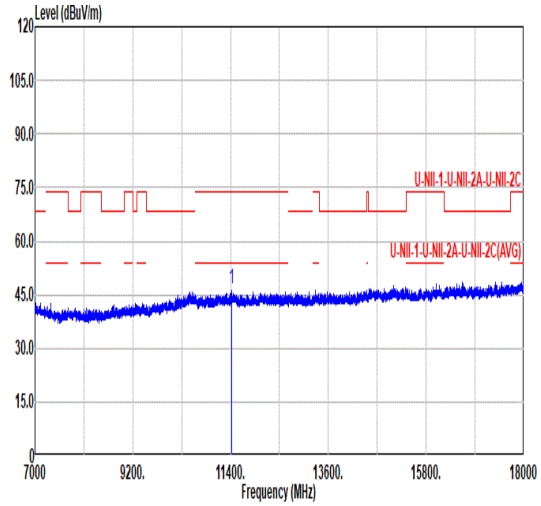 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 46.86 74.00 -27.14 58.59 37.92 14.55 64.20 0.00 --- --- PEAK	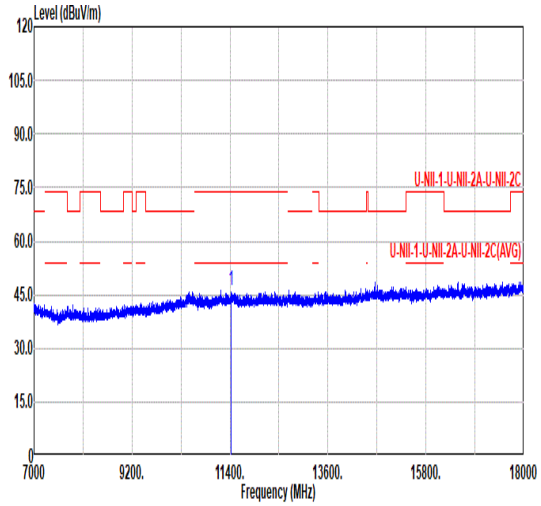 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 46.27 74.00 -27.73 58.00 37.92 14.55 64.20 0.00 --- --- PEAK

Mode	42	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
Pol.	Horizontal	Vertical
Peak Avg	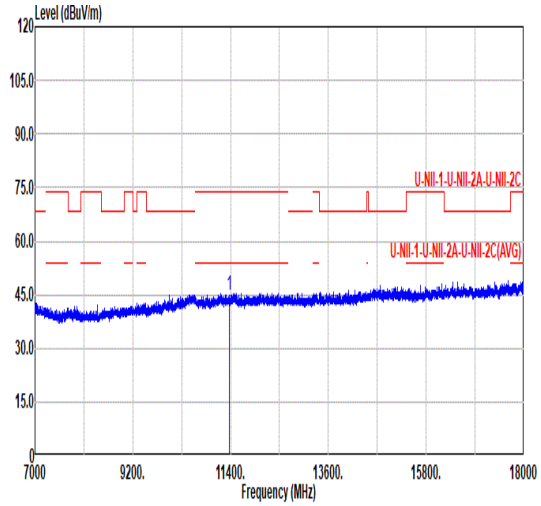 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 45.03 74.00 -28.97 56.86 37.90 14.52 64.25 0.00 --- --- PEAK	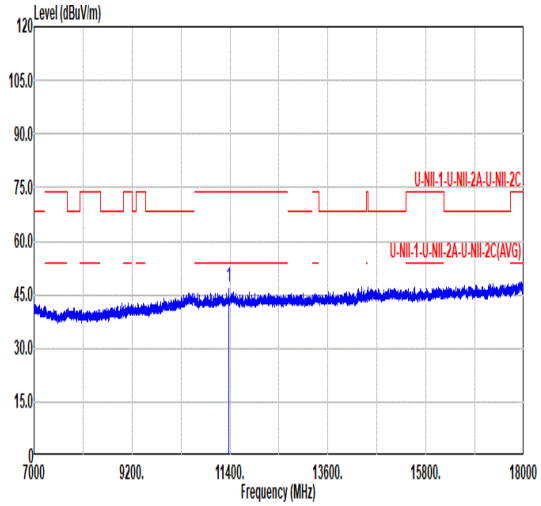 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 46.96 74.00 -27.04 58.79 37.90 14.52 64.25 0.00 --- --- PEAK

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz + LTE Band 14	
Pol.	Horizontal	Fundamental
Peak	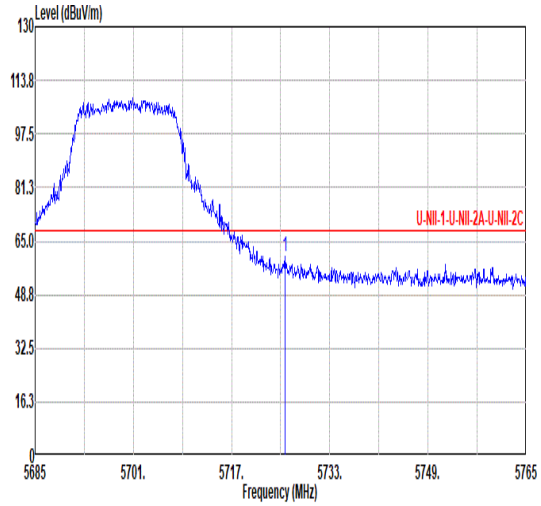 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.72 60.54 68.20 -7.66 47.52 34.55 10.43 31.96 0.00 100 79 PEAK	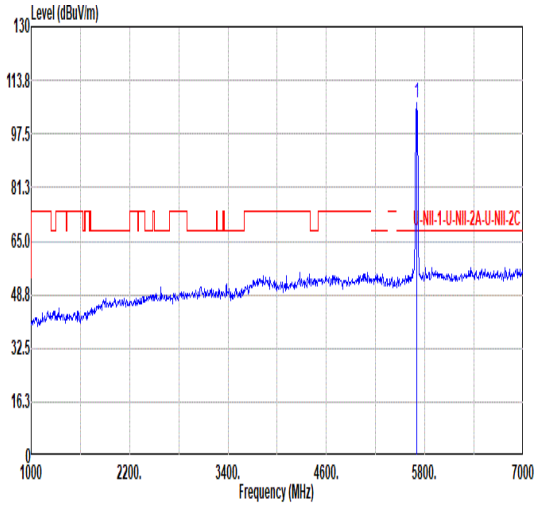 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 106.76 ------ ------ 93.86 34.51 10.41 32.02 0.00 100 79 PEAK
Avg	Blank	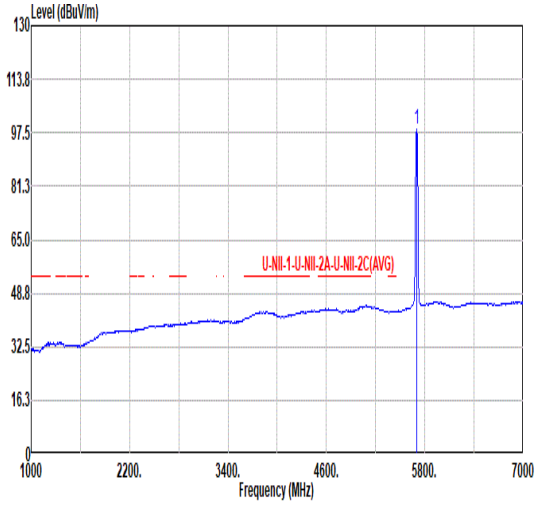 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 98.67 ------ ------ 85.79 34.50 10.40 32.02 0.00 100 79 AVERAGE

Mode	43	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz + LTE Band 14	
Pol.	Vertical	Fundamental
Peak	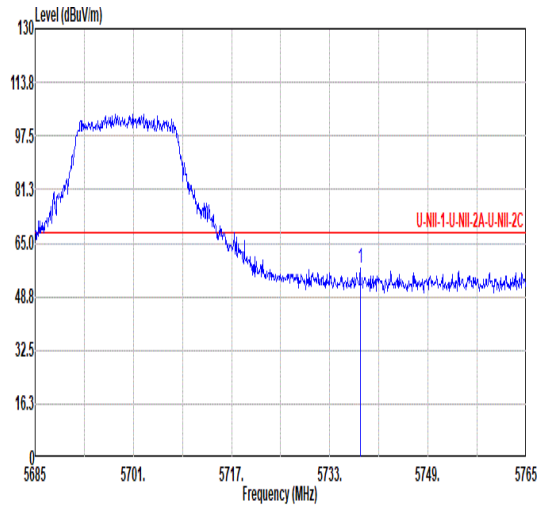 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5737.96 57.25 68.20 -10.95 44.15 34.58 10.44 31.92 0.00 108 54 PEAK	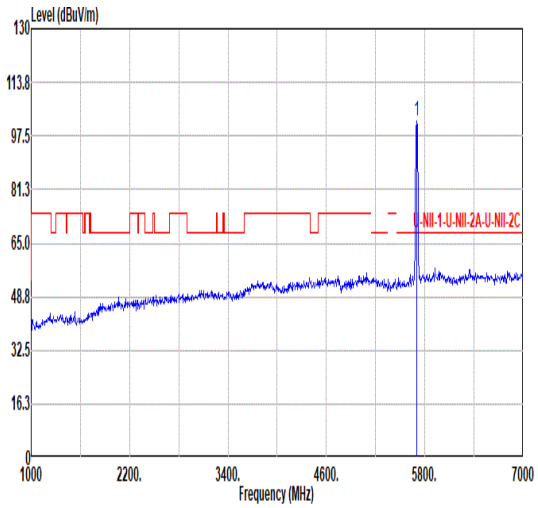 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 102.16 ------ ------ 89.28 34.50 10.40 32.02 0.00 108 54 PEAK
Avg	Blank	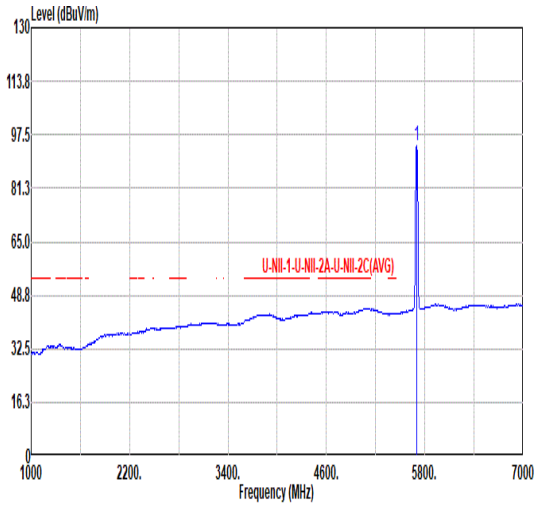 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 94.21 ------ ------ 81.33 34.50 10.40 32.02 0.00 108 54 AVERAGE

Mode	43	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz + LTE Band 14	
Pol.	Horizontal	Vertical
Peak Avg	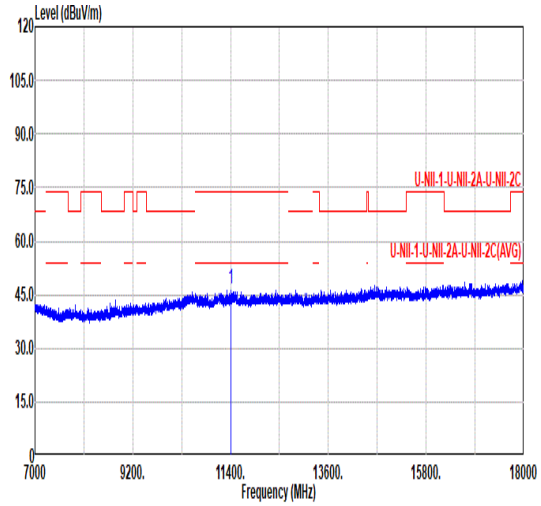 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 46.49 74.00 -27.51 58.29 37.90 14.53 64.23 0.00 --- --- PEAK	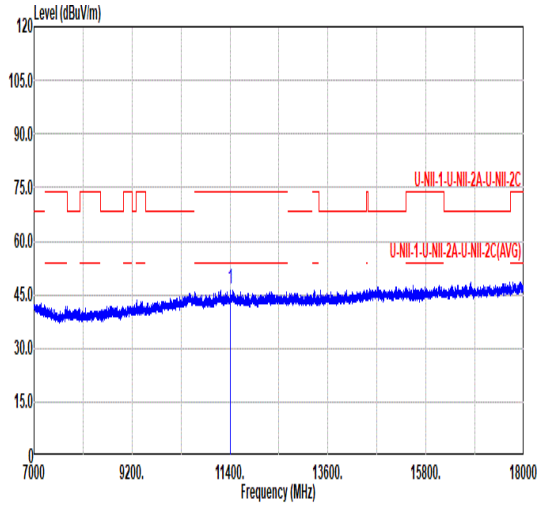 Freq Level Limit Line Over Limit Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 46.73 74.00 -27.27 58.53 37.90 14.53 64.23 0.00 --- --- PEAK

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.26	-	-	10Hz
802.11n HT20	98.13	-	-	10Hz
802.11n HT40	96.30	0.942	1.062	1.1kHz
802.11ac VHT80	92.44	0.461	2.170	2.2kHz

802.11a

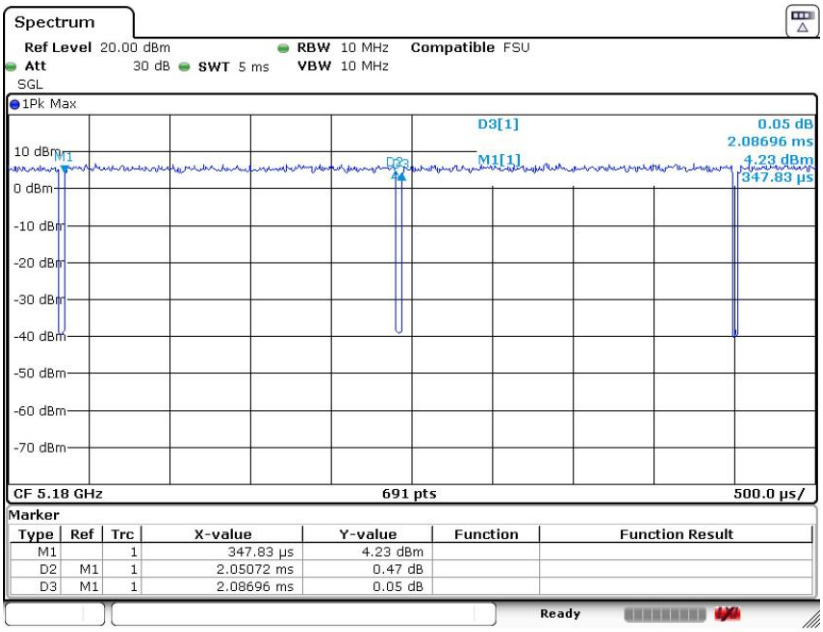

802.11n HT20

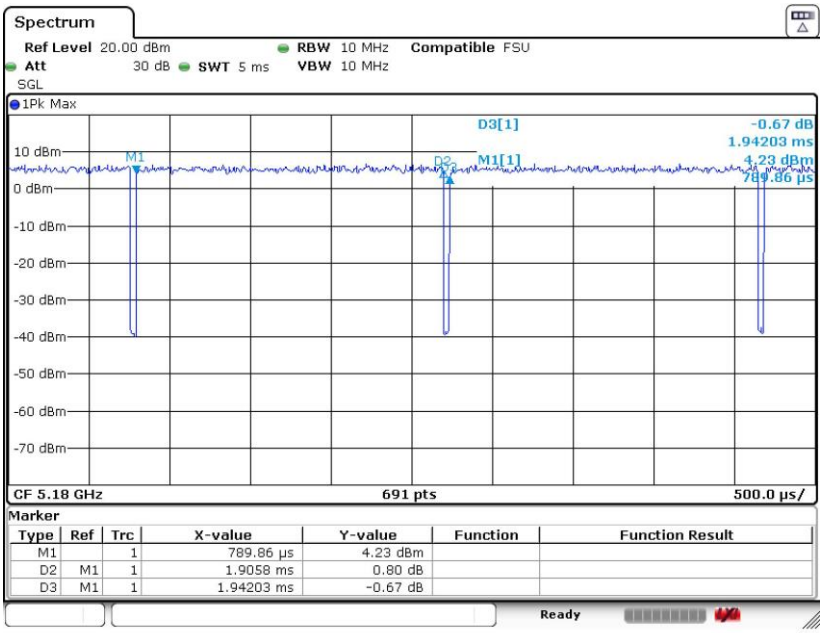

802.11n HT40

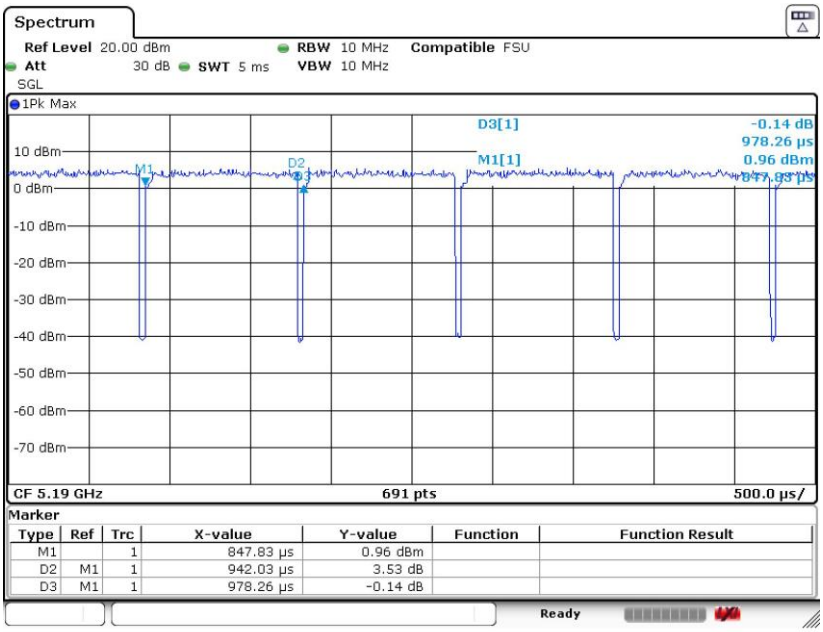
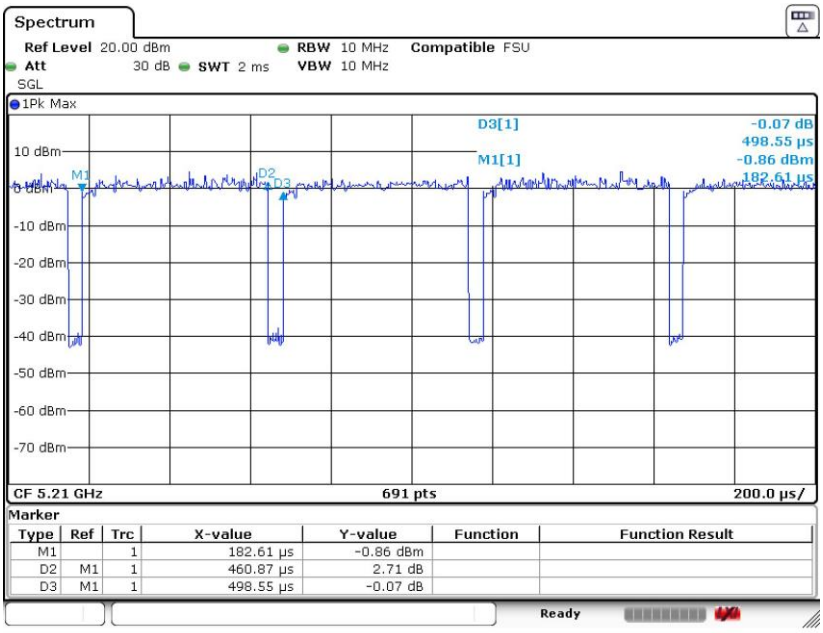
802.11ac VHT80