

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.265 mW/g, SAR (10g): 0.154 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

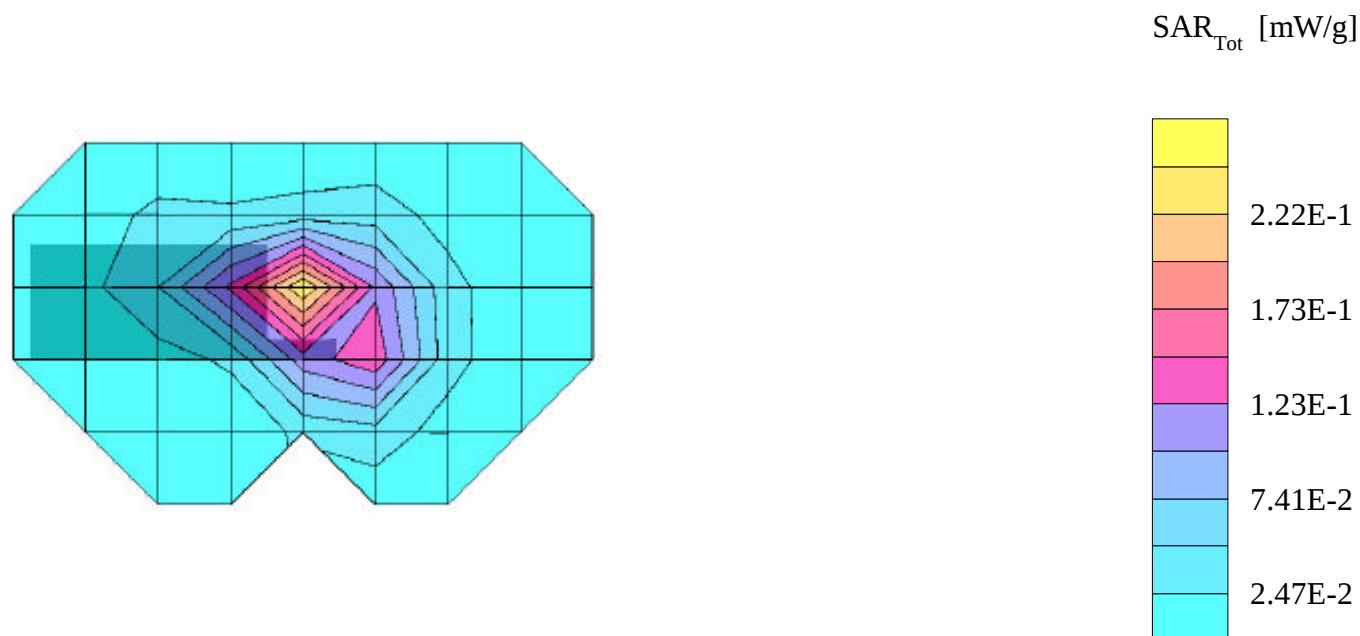

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.296 mW/g, SAR (10g): 0.174 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

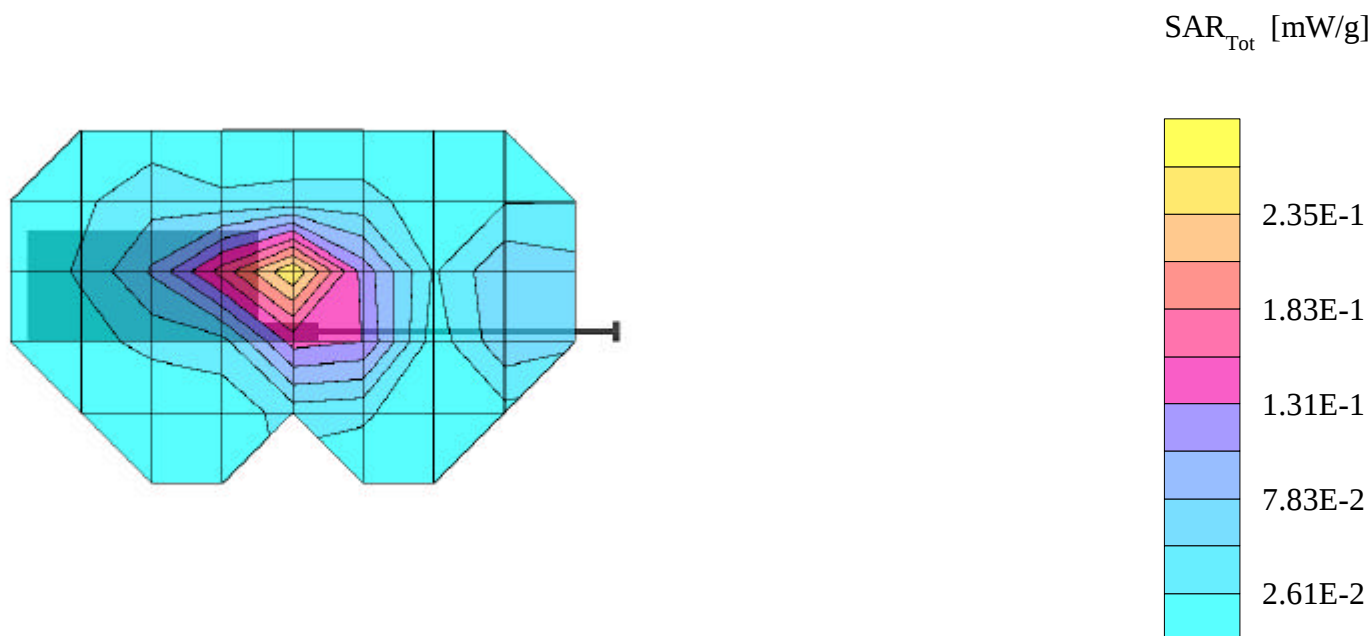

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.250 mW/g, SAR (10g): 0.144 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0600 [1880.00MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

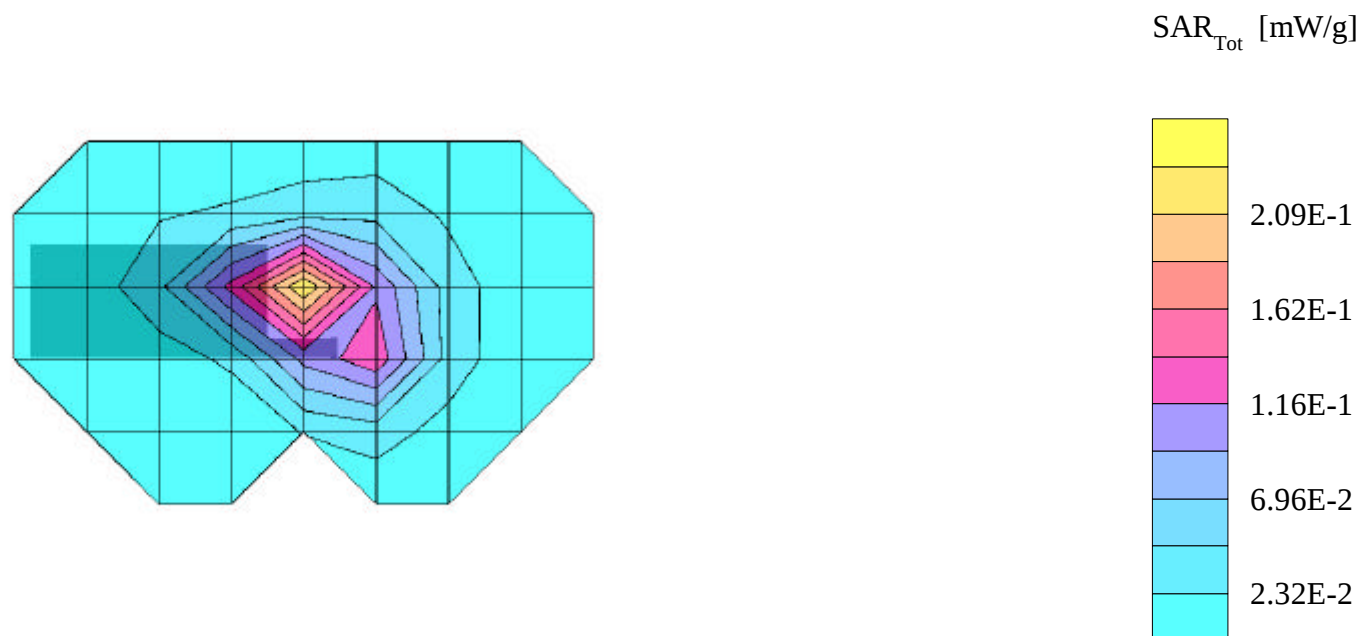

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.281 mW/g, SAR (10g): 0.161 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0600 [1880.00MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

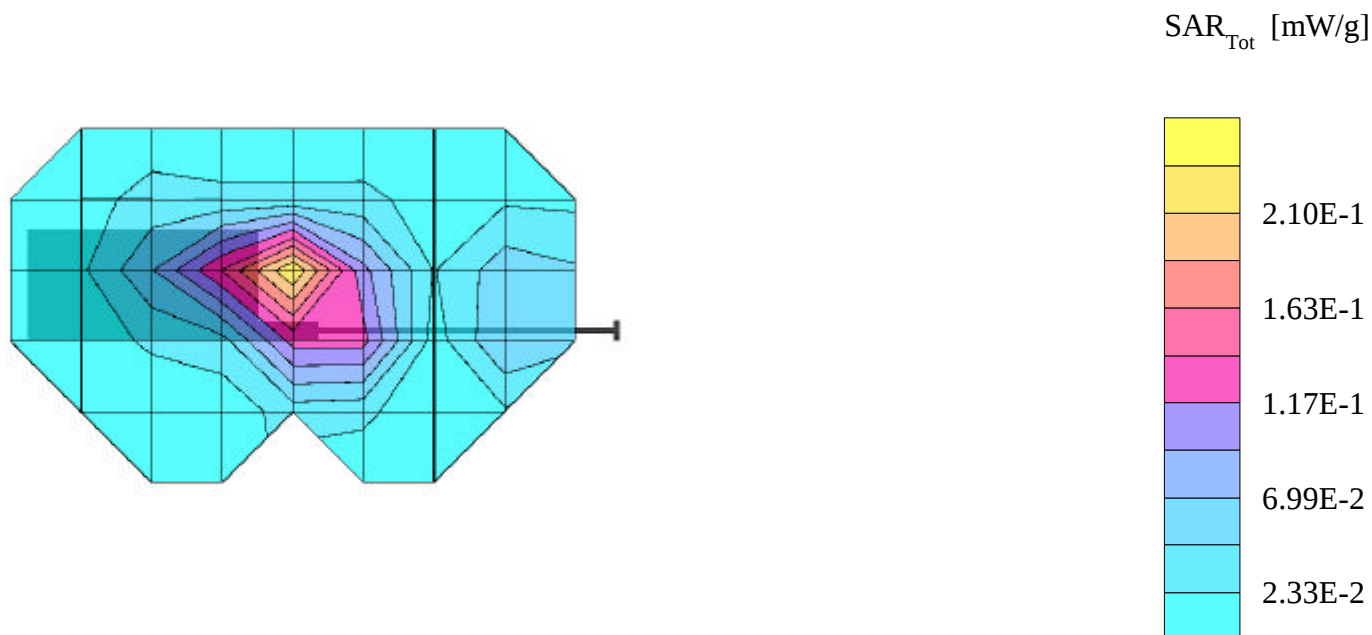

TOSHIBA FCC ID: CJ6DCE46036A -- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.309 mW/g, SAR (10g): 0.179 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

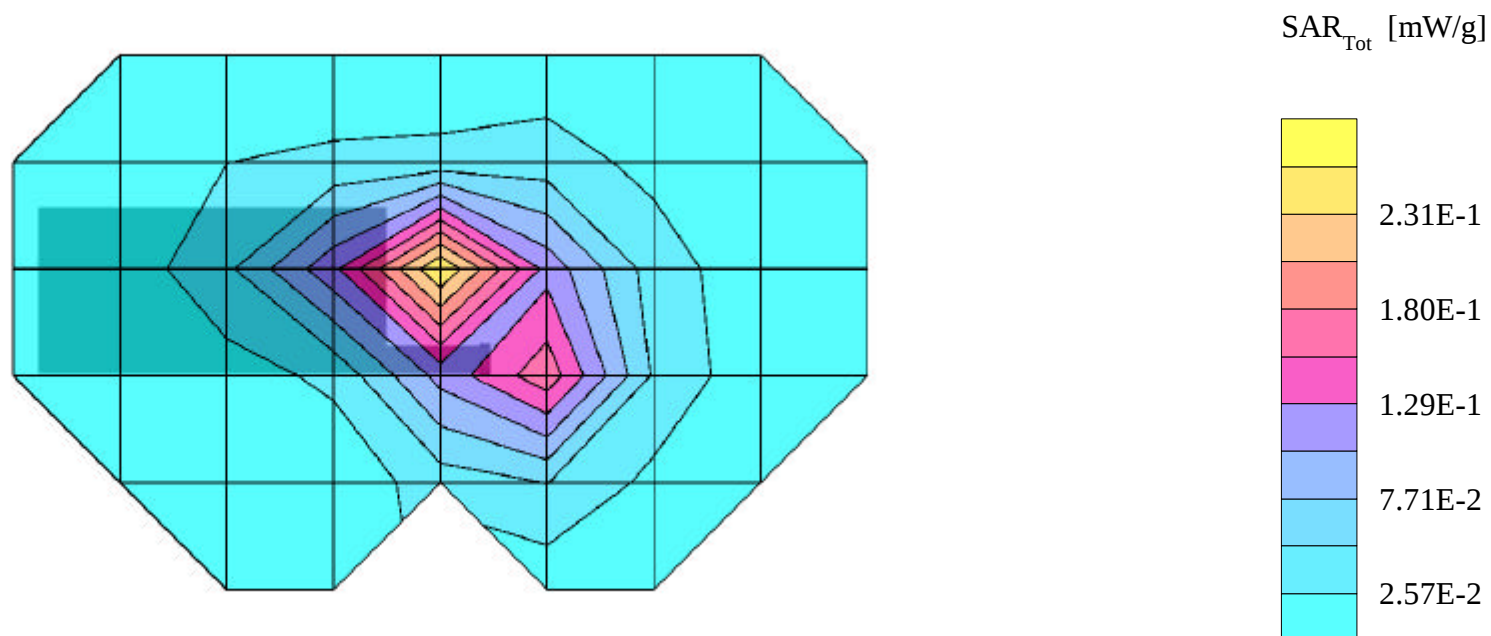

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.303 mW/g, SAR (10g): 0.175 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

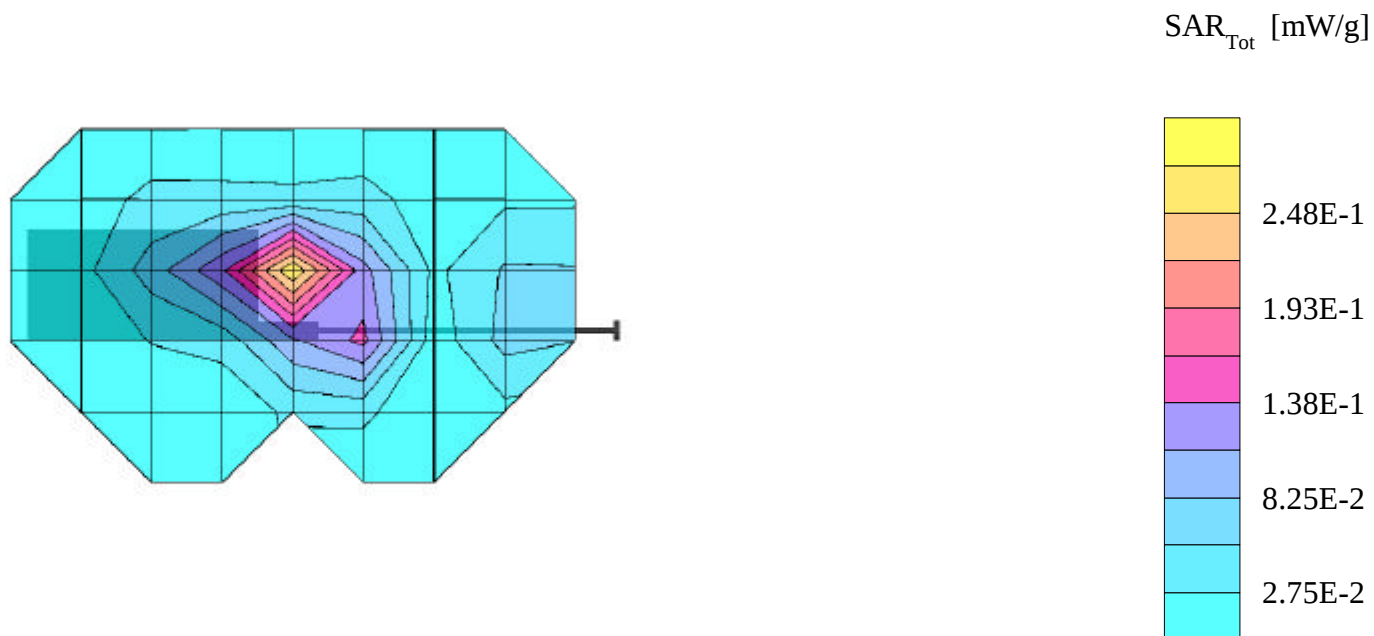

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section;

Probe: ET3DV6 - SN1560

Medium Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³

Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.255 mW/g, SAR (10g): 0.150 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

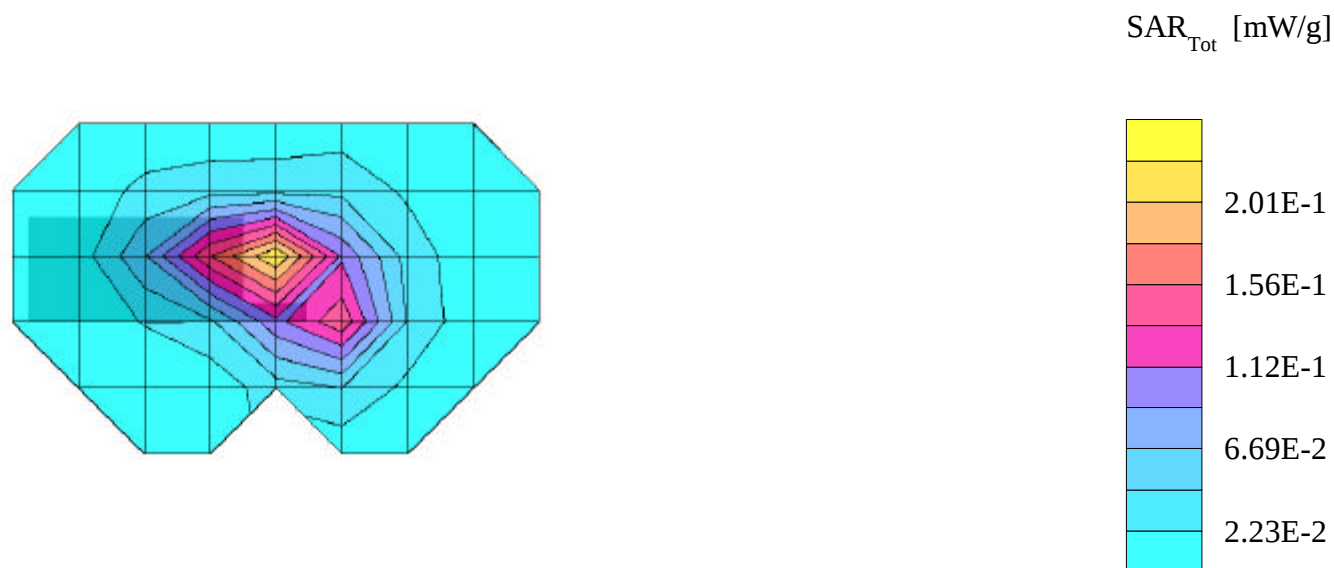

TOSHIBA FCC ID:CJ6DCE46036A--PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.298 mW/g, SAR (10g): 0.171 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 3.0cm from EUT (antenna side) to flat phantom, w/Beltclip

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

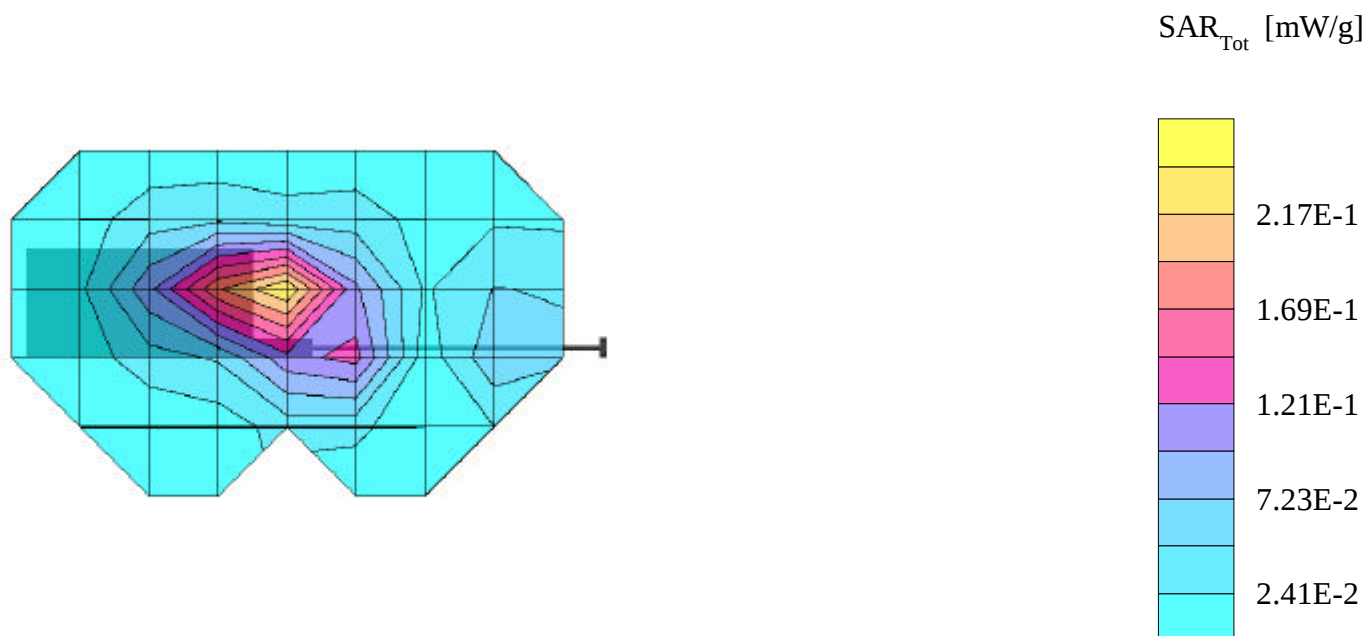

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.312 mW/g, SAR (10g): 0.170 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

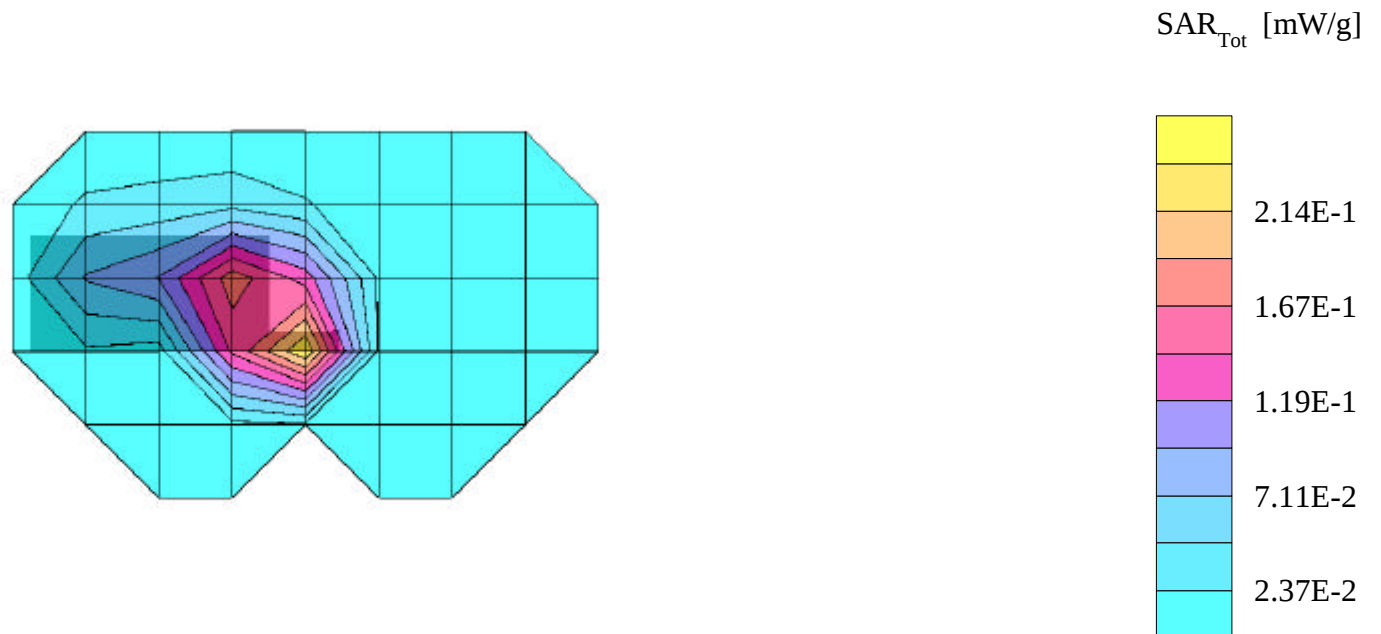

TOSHIBA FCC ID: CJ6DCE46036A -- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.352 mW/g, SAR (10g): 0.2.07 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0025 [1851.25MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.2°C / Meas. Tissue Temp. = 22.1°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/30/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

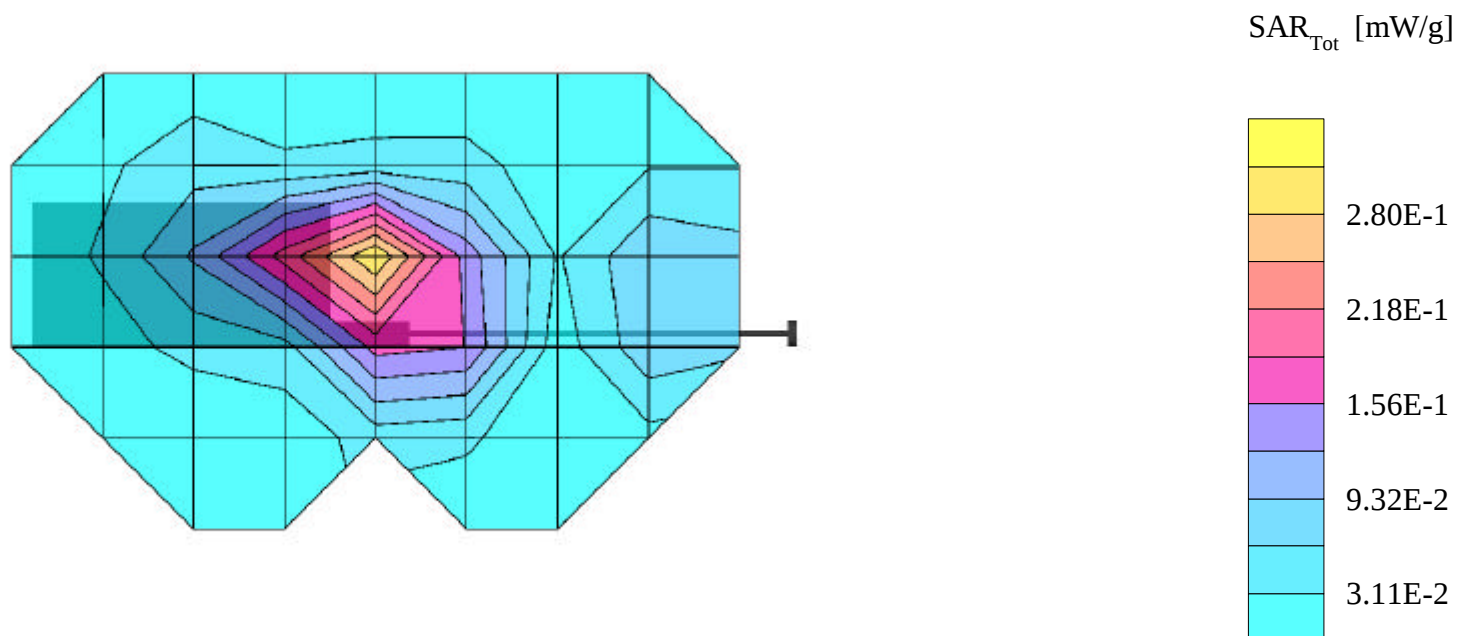

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.290 mW/g, SAR (10g): 0.169 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0600 [1880MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

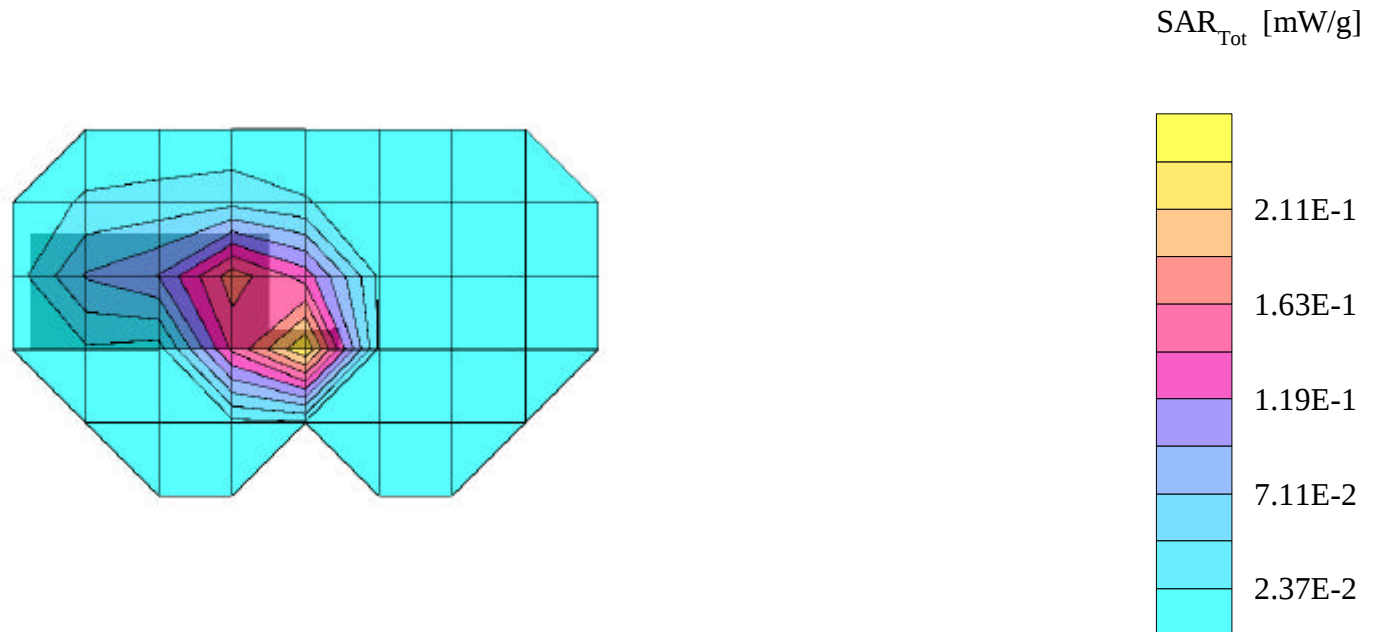

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.325 mW/g , SAR (10g): 0.174 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.0600 [1880MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.5cm from EUT (antenna side) to flat phantom, w/Hoster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

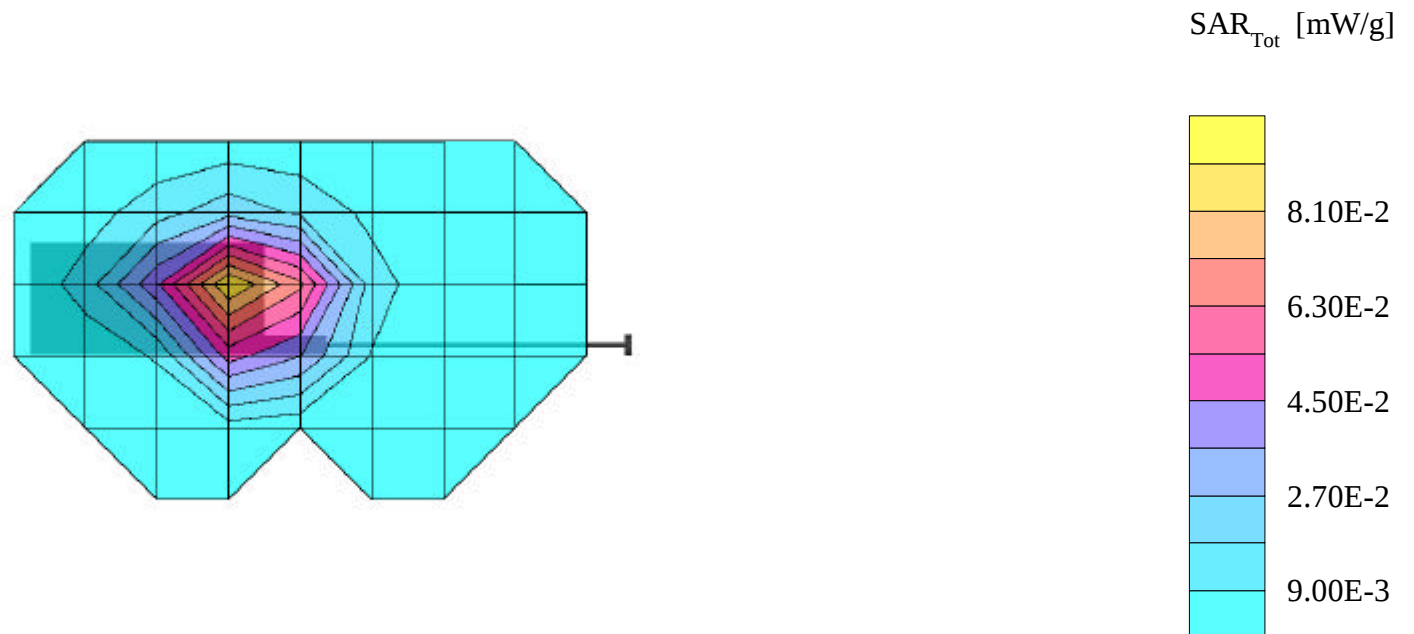

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.349 mW/g , SAR (10g): 0.175 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

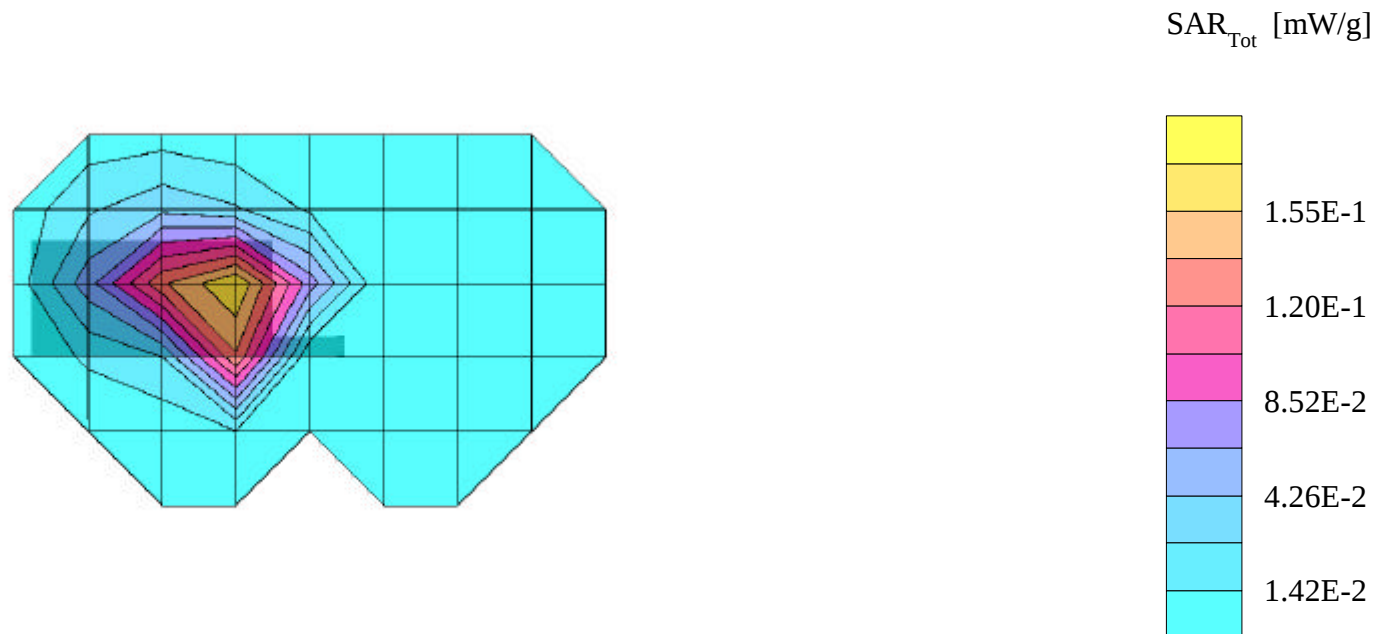

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.340 mW/g, SAR (10g): 0.211 mW/g

Toshiba TriMode Phone Model: CDM-9500


PCS CDMA Mode, Ch1175 [1908.75MHz]; Standard Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.5cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

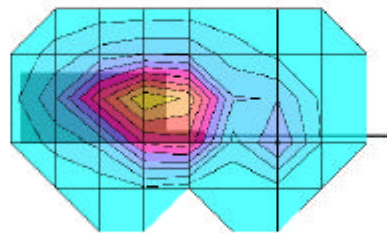

SAR_{Tot} [mW/g]

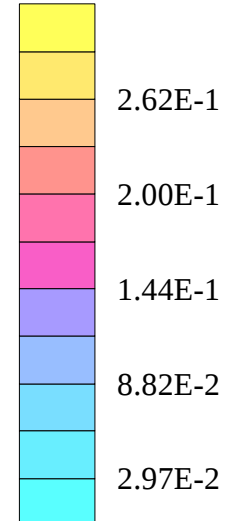

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 0.298 mW/g, SAR (10g): 0.160 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz]; Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Holster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

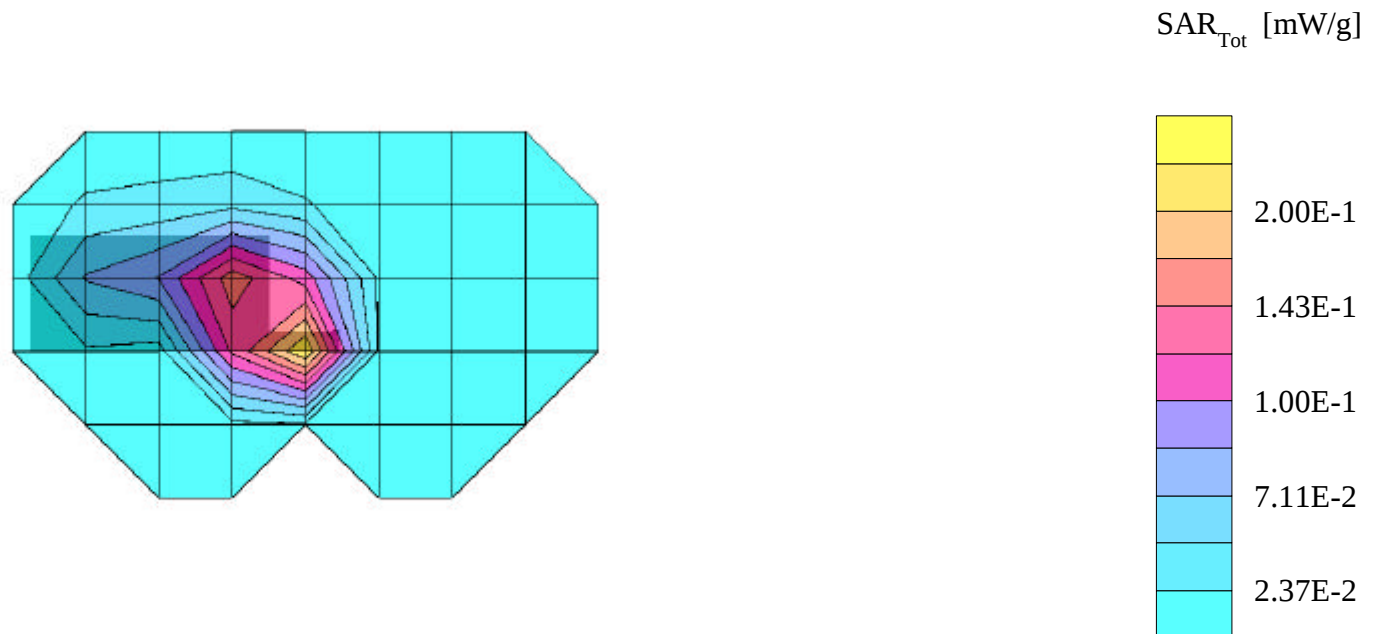

TOSHIBA FCC ID:CJ6DCE46036A-- PCS CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(4.70,4.70,4.70)

Med. Parameters 1900 MHz Muscle: $\sigma = 1.55$ mho/m $\epsilon_r = 54.9$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.351 mW/g, SAR (10g): 0.216 mW/g

Toshiba TriMode Phone Model: CDM-9500

PCS CDMA Mode, Ch.1175 [1908.75MHz];Extended Battery; Flip = closed; Ambient Temp. = 22.4°C / Meas. Tissue Temp. = 22.3°C

Conducted Power = 24.0dBm; Spacing = 2.2cm from EUT (antenna side) to flat phantom, w/Hoster

Test Date - 04/26/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

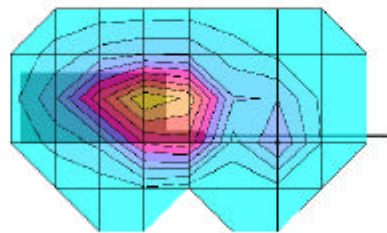

SAR_{Tot} [mW/g]

