



Annex for BLE

Test Report No.: CTL2406122041-WF

TABLE OF CONTENTS

1. Bandwidth.....	3
1.1 Test Result	3
1.1.1 OBW	3
1.1.2 6dB BW	3
1.2 Test Graph.....	4
1.2.1 OBW	4
1.2.2 6dB BW	6
2. Maximum Conducted Output Power	8
2.1 Test Result	8
2.1.1 Power	8
2.2 Test Graph.....	9
2.2.1 Power	9
3. Maximum Power Spectral Density	11
3.1 Test Result	11
3.1.1 PSD	11
3.2 Test Graph.....	12
3.2.1 PSD	12
4. Unwanted Emissions In Non-restricted Frequency Bands.....	14
4.1 Test Result	14
4.1.1 Ref.....	14



4.1.2 CSE 14

4.2 Test Graph..... 15

4.2.1 Ref..... 15

4.2.2 CSE 17

FCCID: 2A4CE-A6LMAX

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.279	/	Pass
		2440	1	1.277	/	Pass
		2480	1	1.252	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.790	≥ 0.5	Pass
		2440	1	0.794	≥ 0.5	Pass
		2480	1	0.797	≥ 0.5	Pass


FCCID: 2A4CE-A6LMAX

1.2 Test Graph

1.2.1 OBW

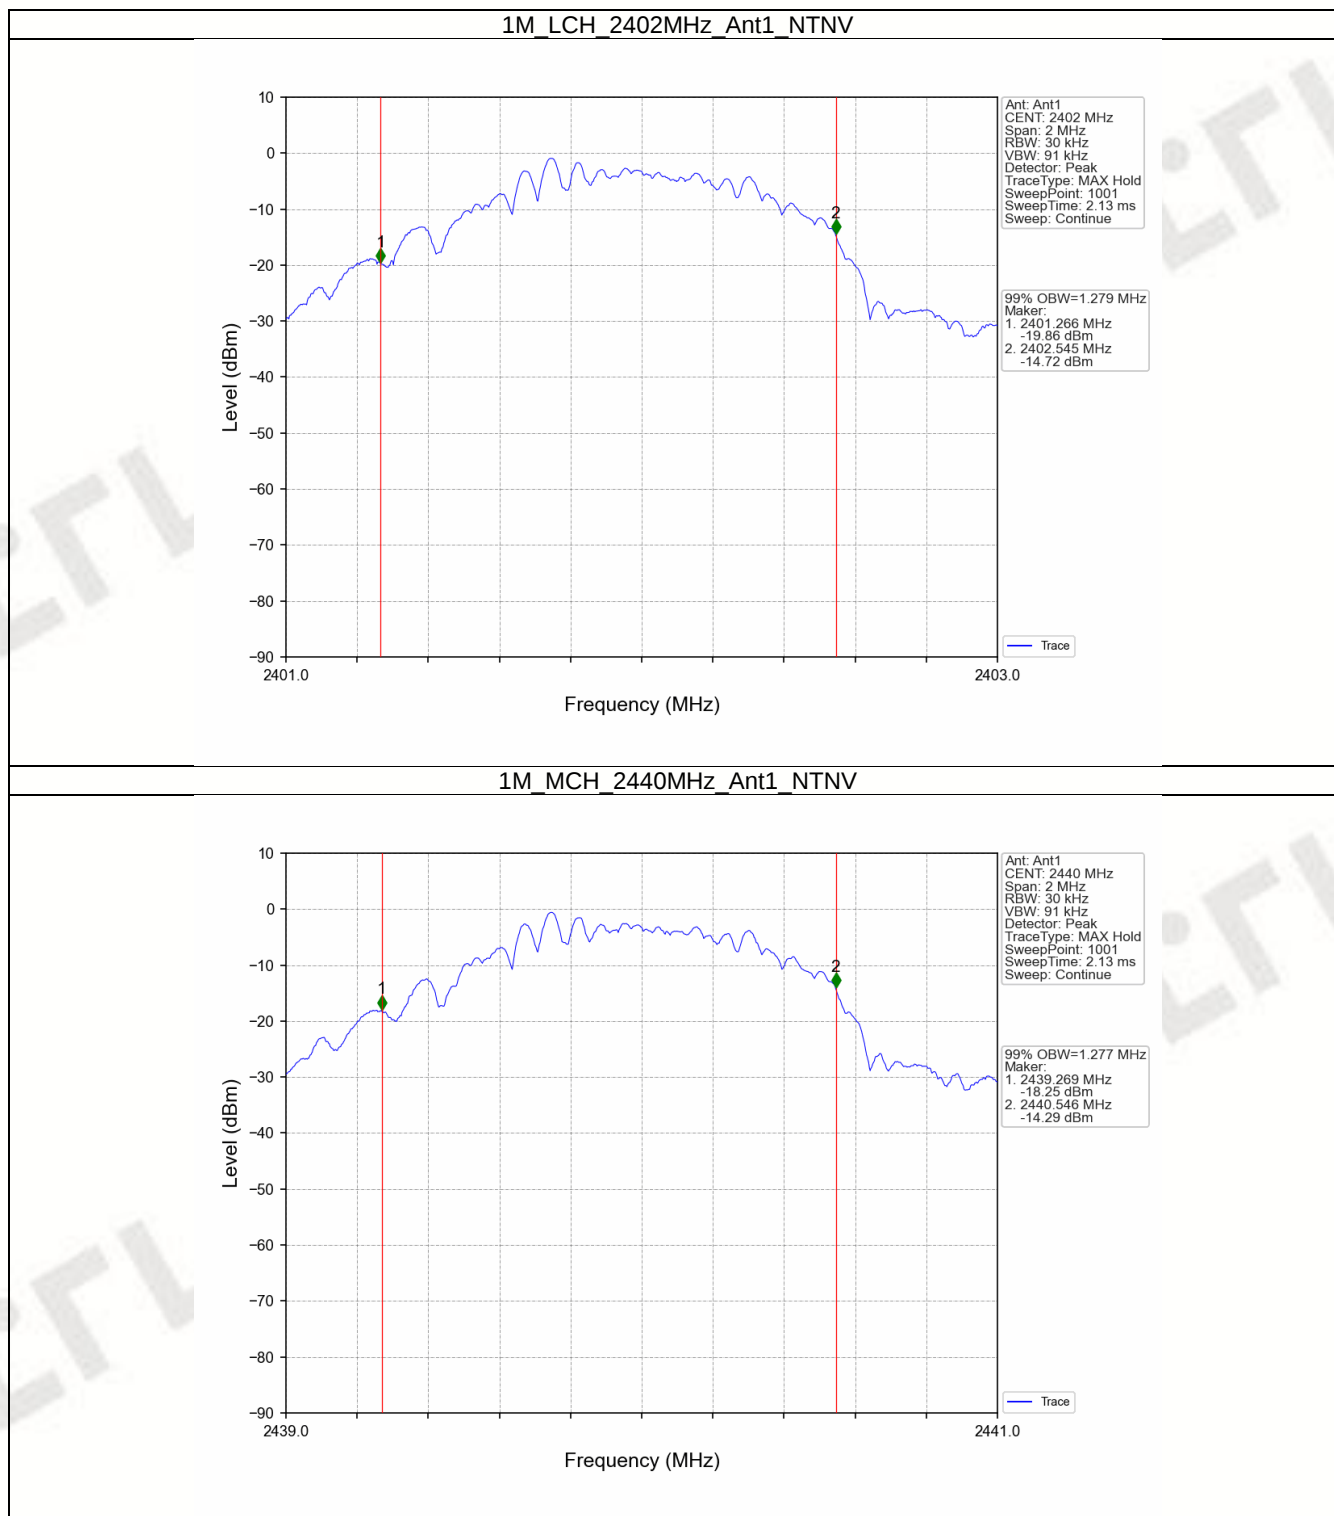


FCCID: 2A4CE-A6LMAX

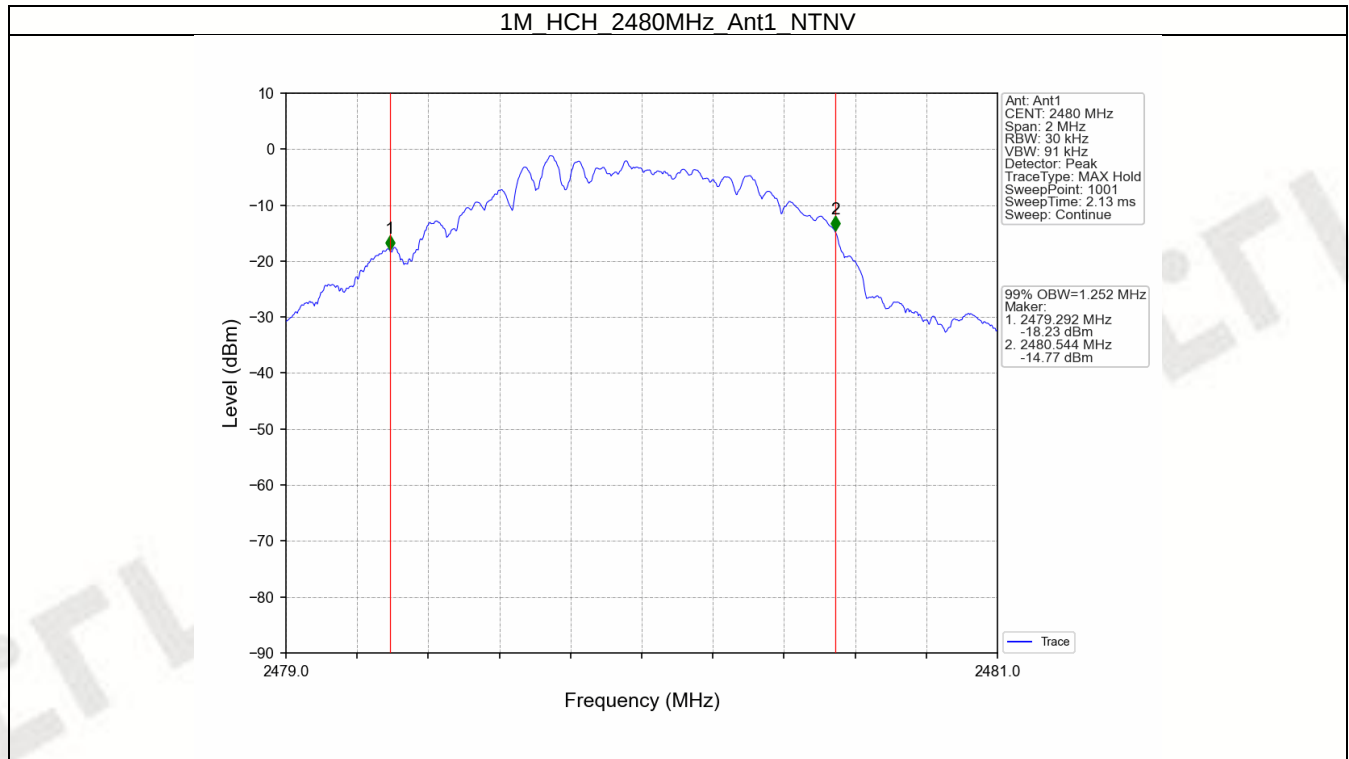


FCCID: 2A4CE-A6LMAX

1.2.2 6dB BW

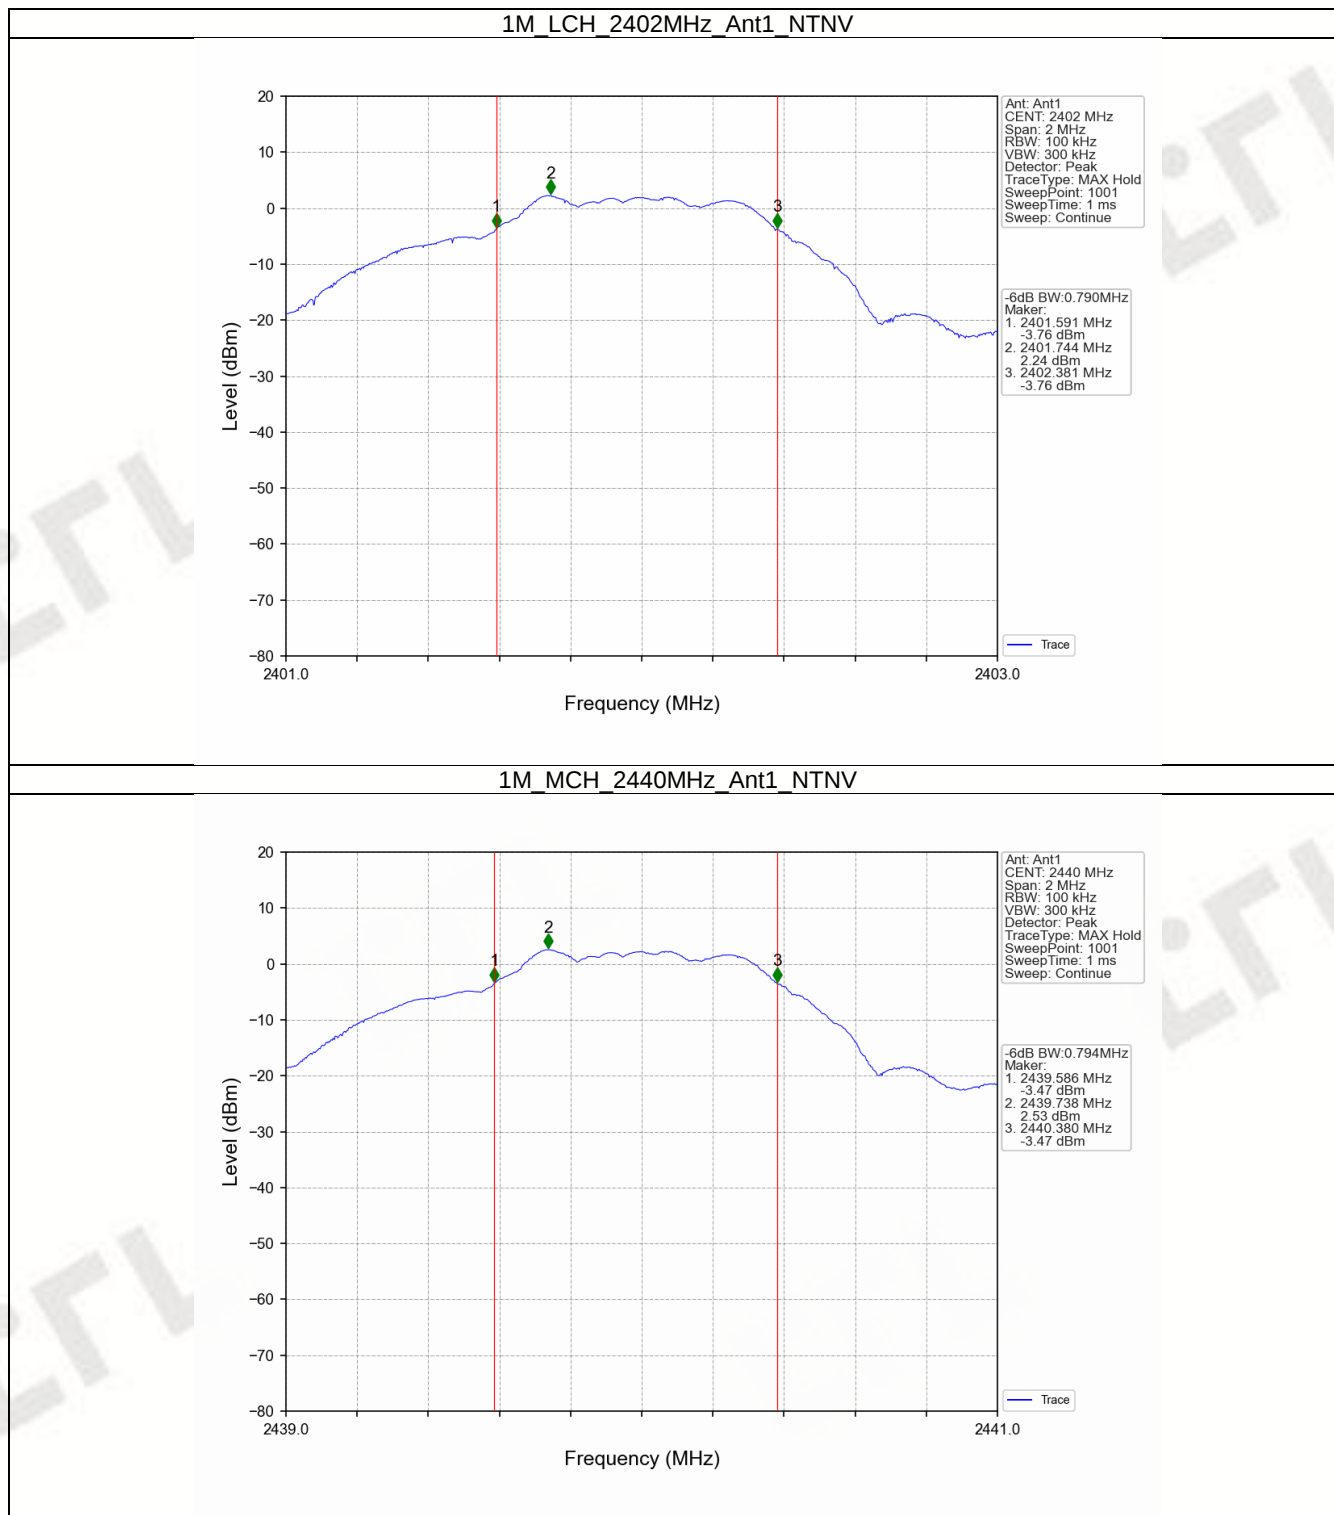

FCCID: 2A4CE-A6LMAX

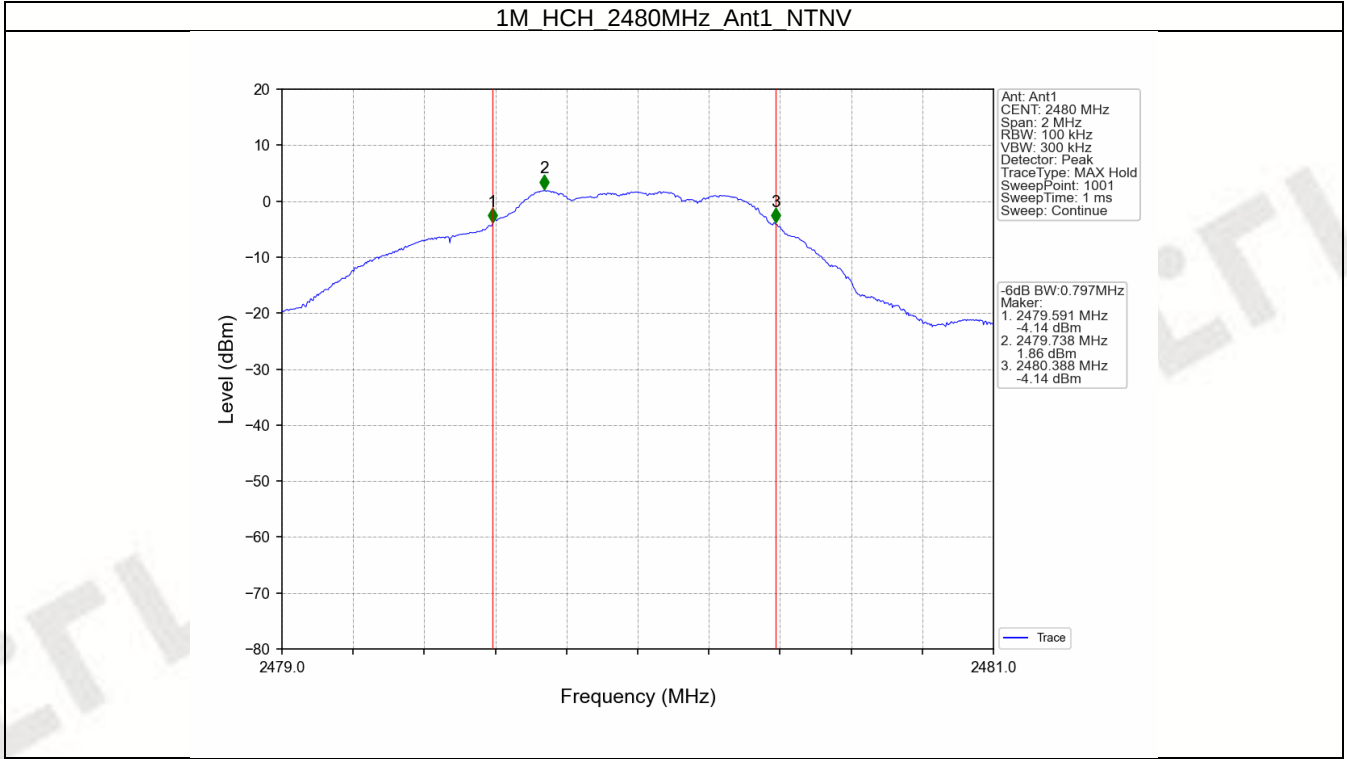

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	3.71	<=30	Pass
		2440	4.02	<=30	Pass
		2480	3.36	<=30	Pass

Note1: Antenna Gain: Ant1: 0.00dBi;


FCCID: 2A4CE-A6LMAX

2.2 Test Graph

2.2.1 Power

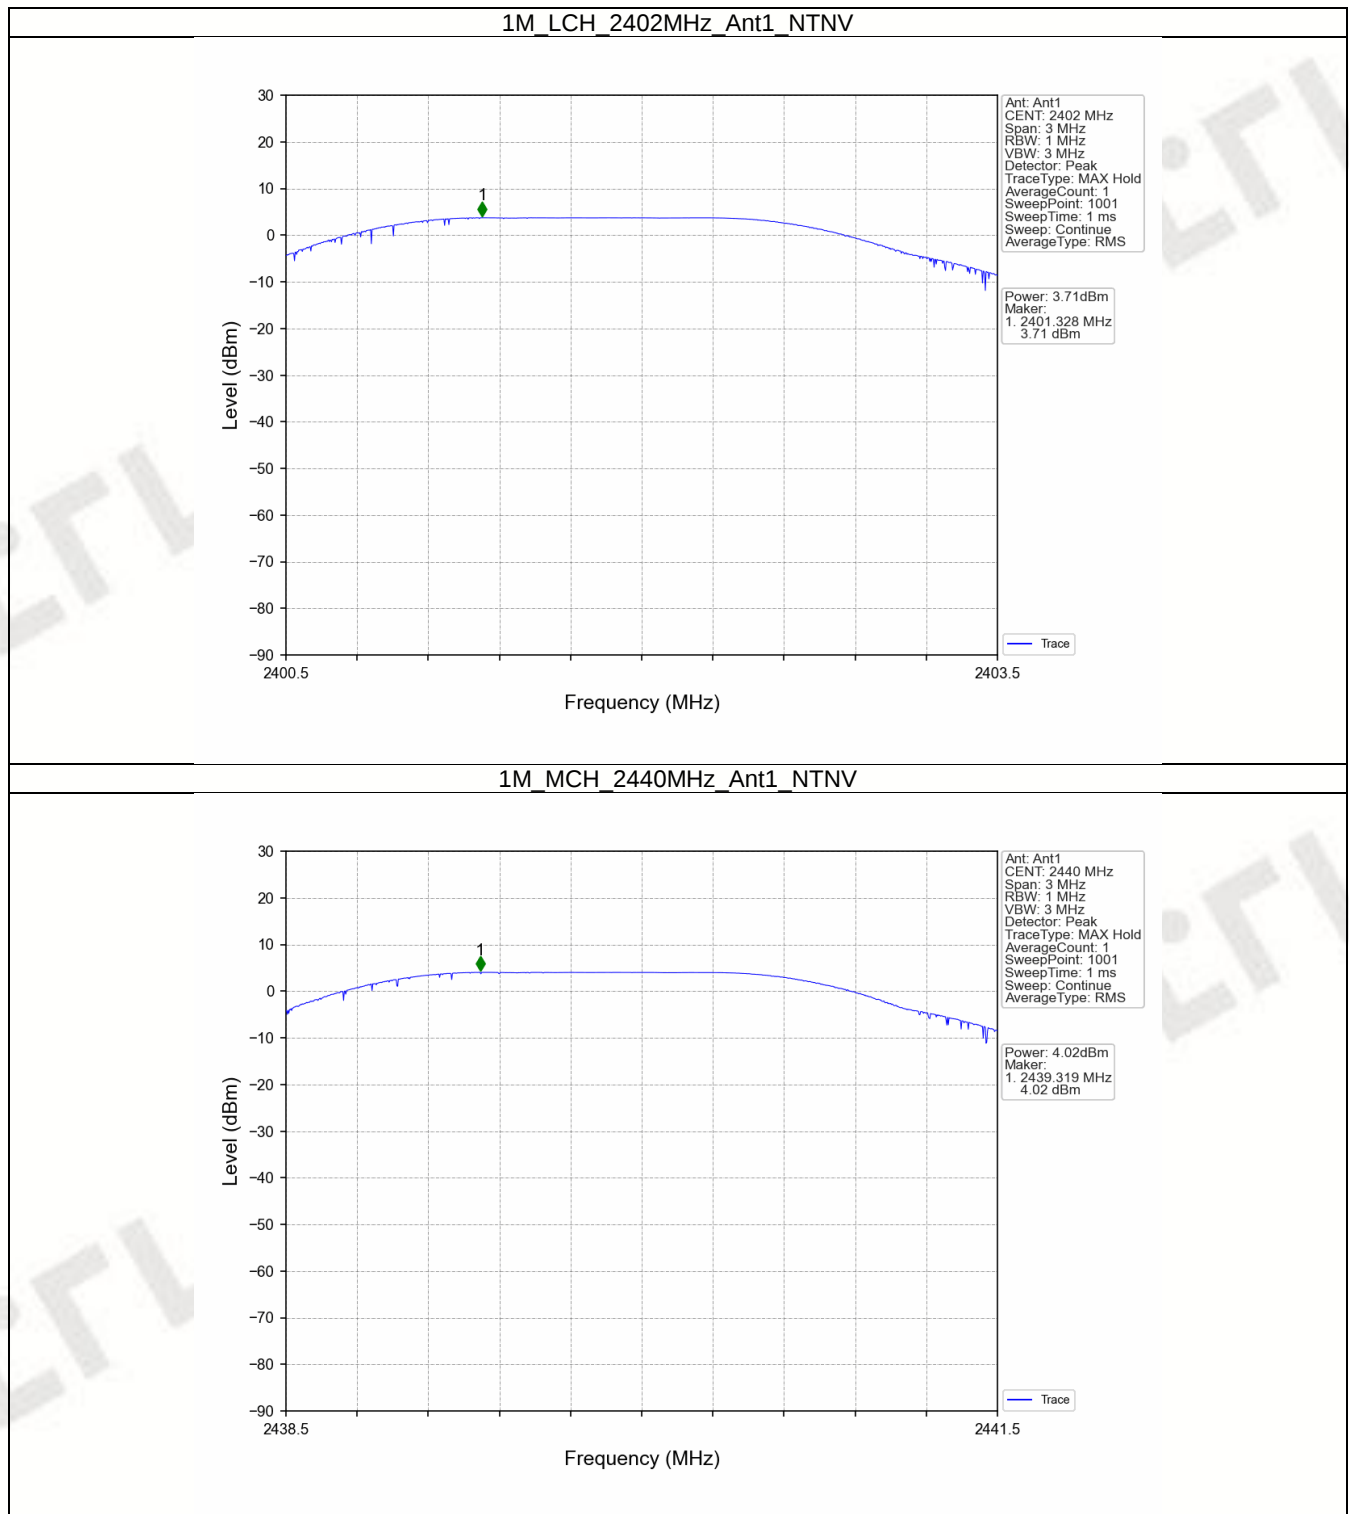

FCCID: 2A4CE-A6LMAX

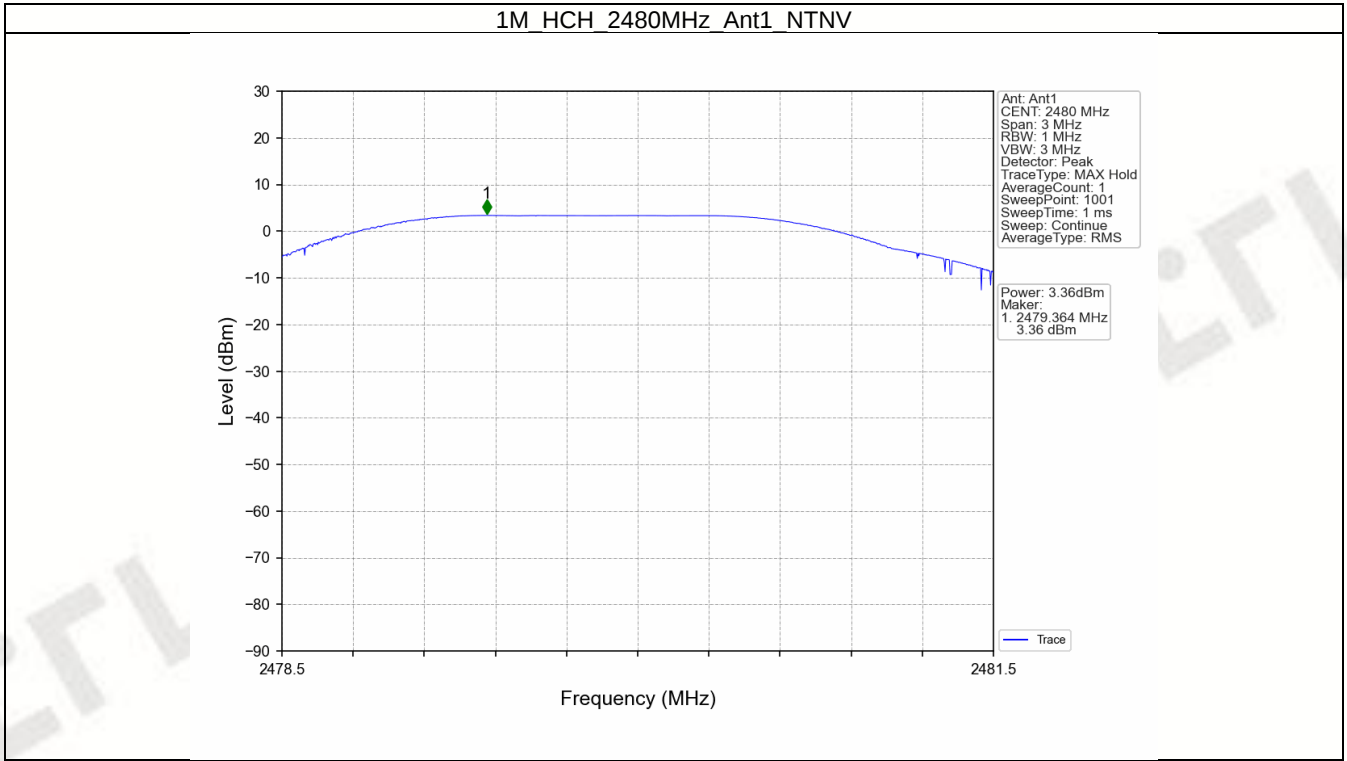

FCCID: 2A4CE-A6LMAX

3. Maximum Power Spectral Density

3.1 Test Result


3.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-12.24	<=8	Pass
		2440	-12.21	<=8	Pass
		2480	-12.97	<=8	Pass
Note1: Antenna Gain: Ant1: 0.00dBi;					


FCCID: 2A4CE-A6LMAX

3.2 Test Graph

3.2.1 PSD

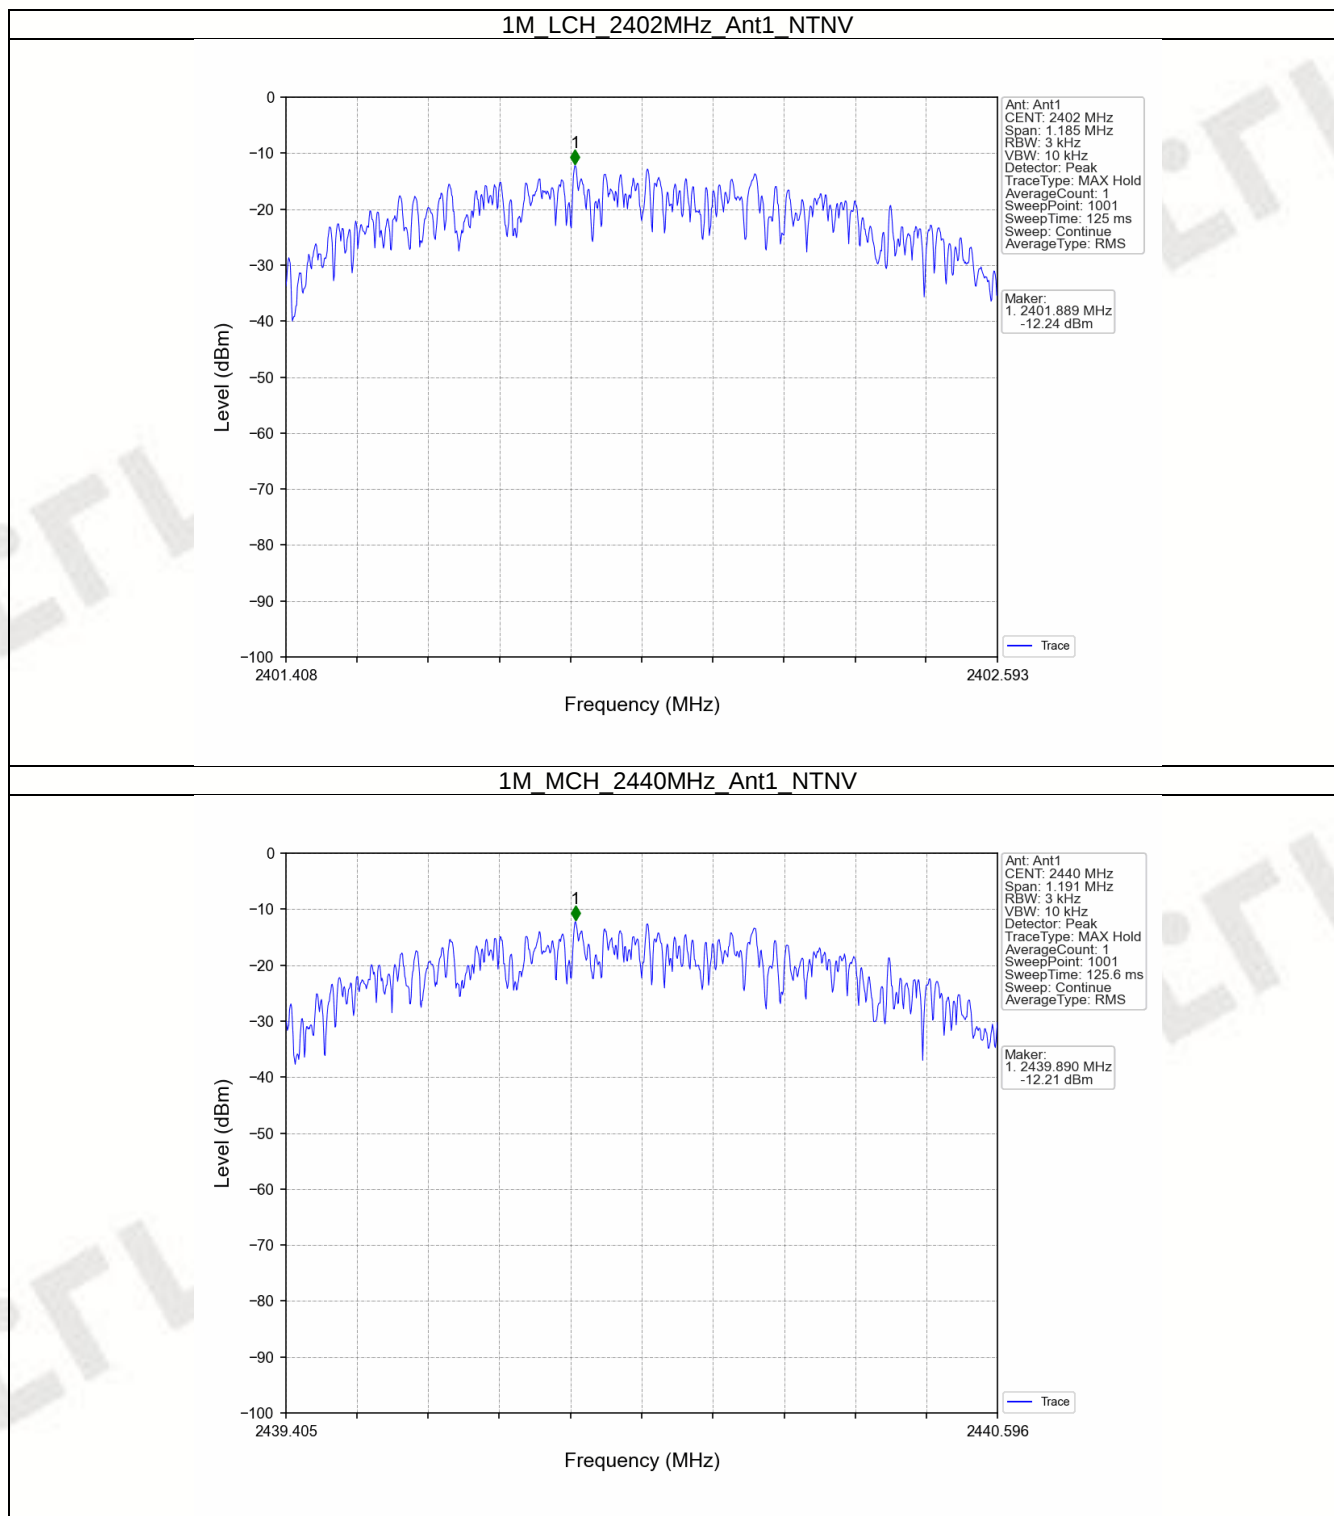

FCCID: 2A4CE-A6LMAX

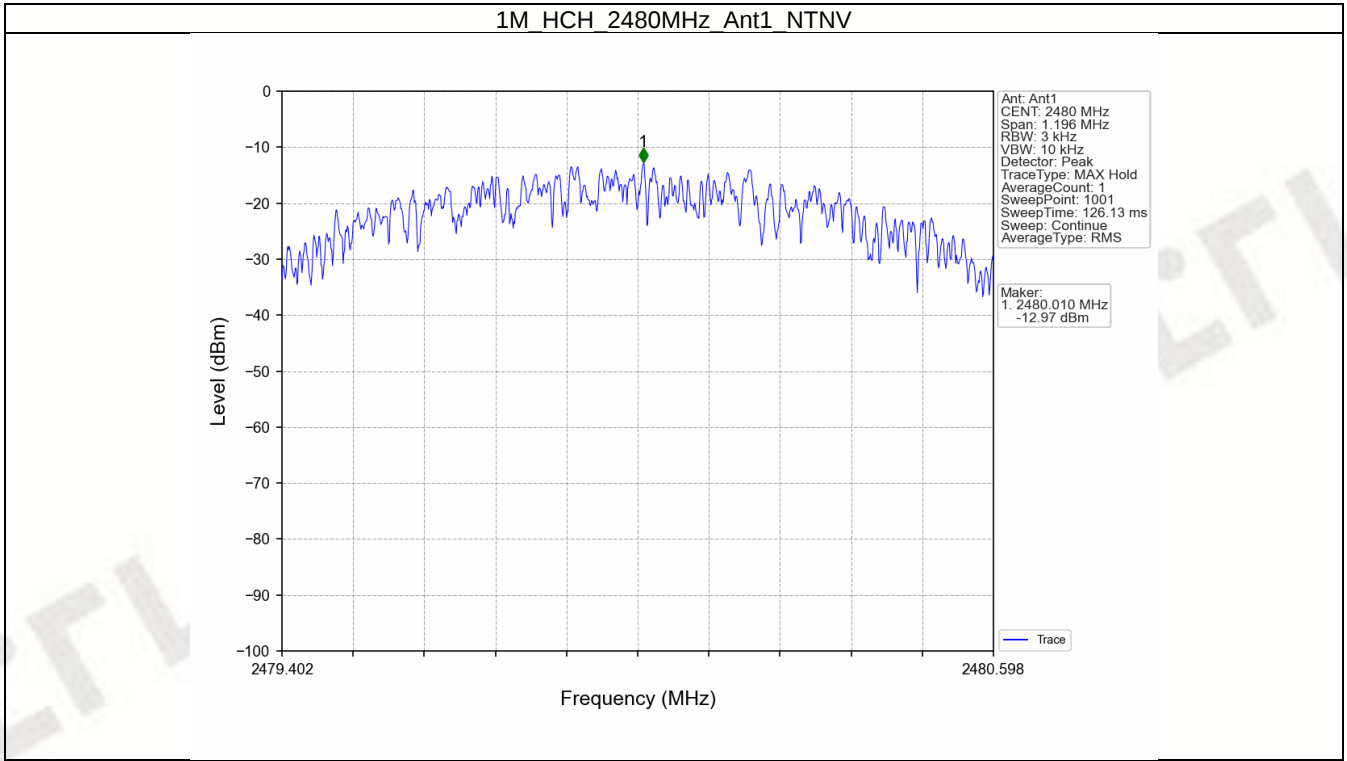

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref

Mode	Tx Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	2.20
		2440	1	2.50
		2480	1	1.86
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.				


4.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	2.50	-17.50	Pass
		2440	1	2.50	-17.50	Pass
		2480	1	2.50	-17.50	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.						


FCCID: 2A4CE-A6LMAX

4.2 Test Graph

4.2.1 Ref

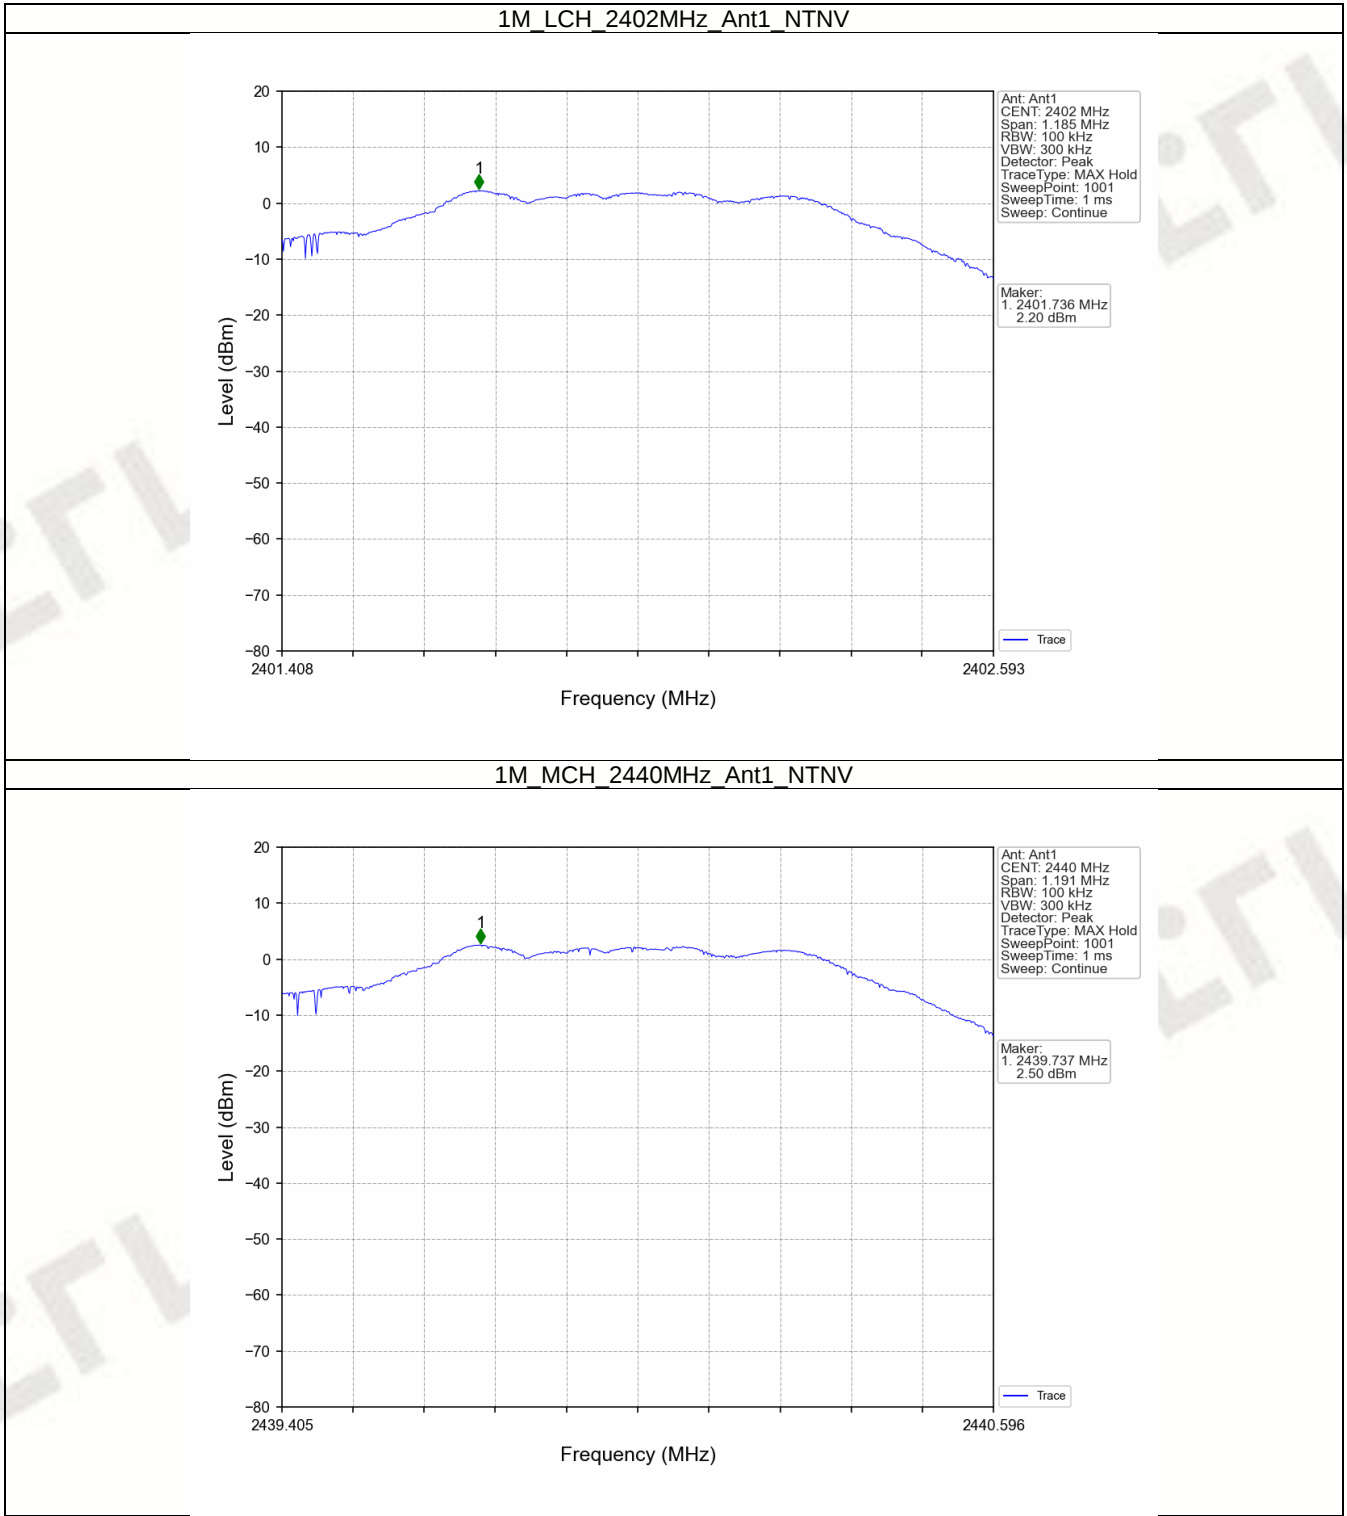


FCCID: 2A4CE-A6LMAX

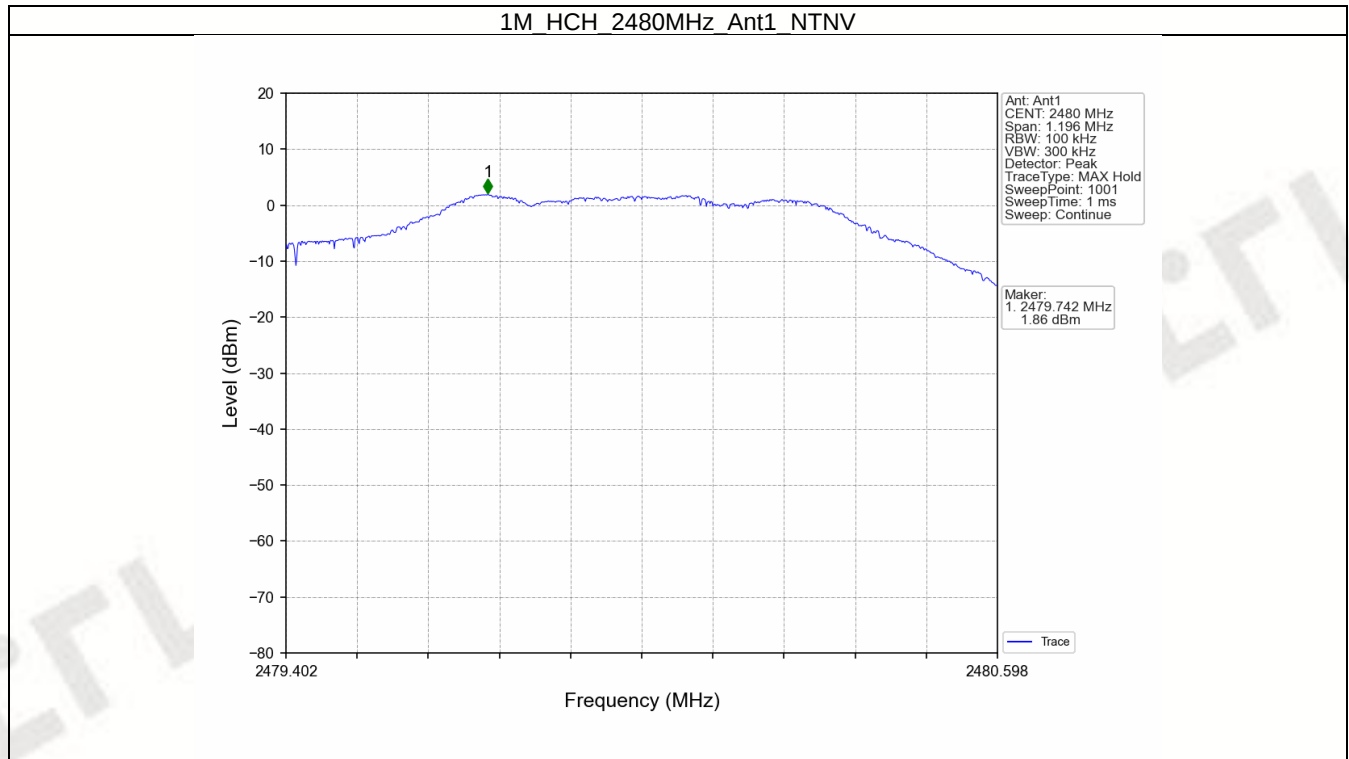


FCCID: 2A4CE-A6LMAX

4.2.2 CSE

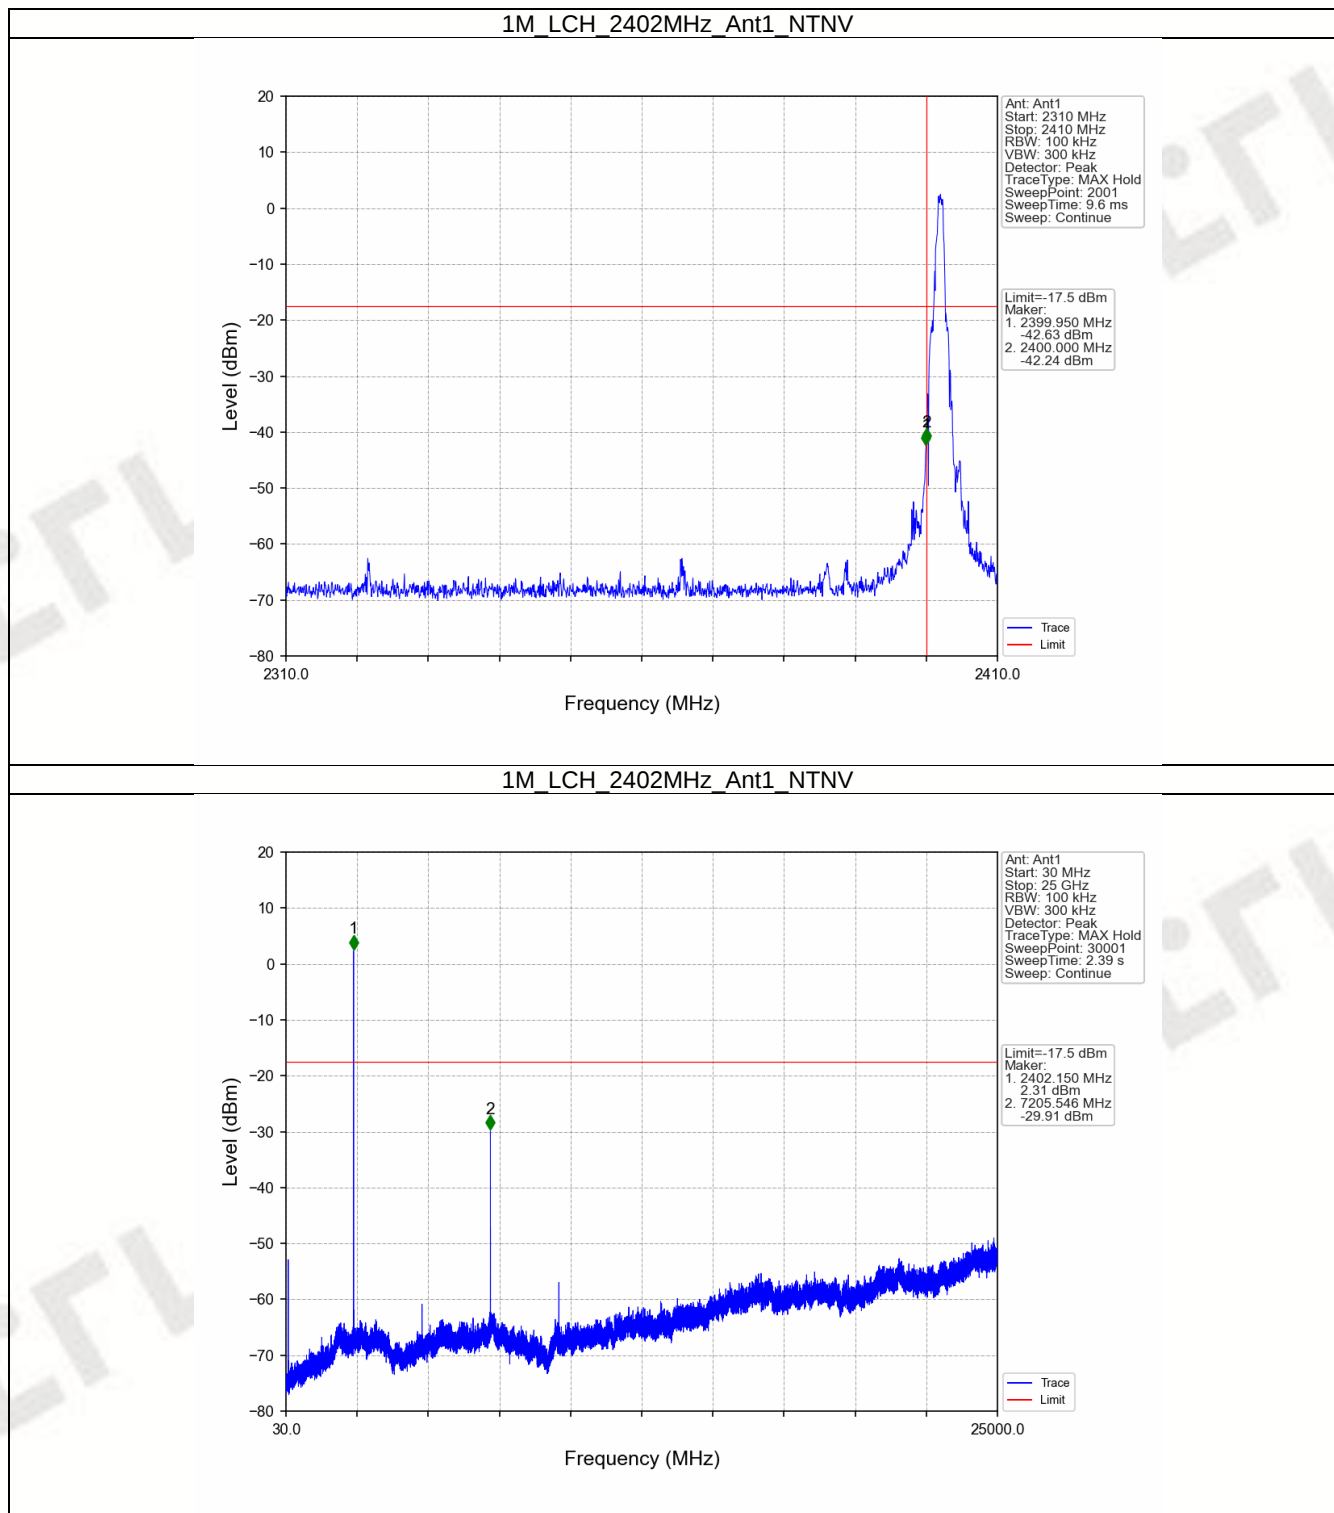

FCCID: 2A4CE-A6LMAX

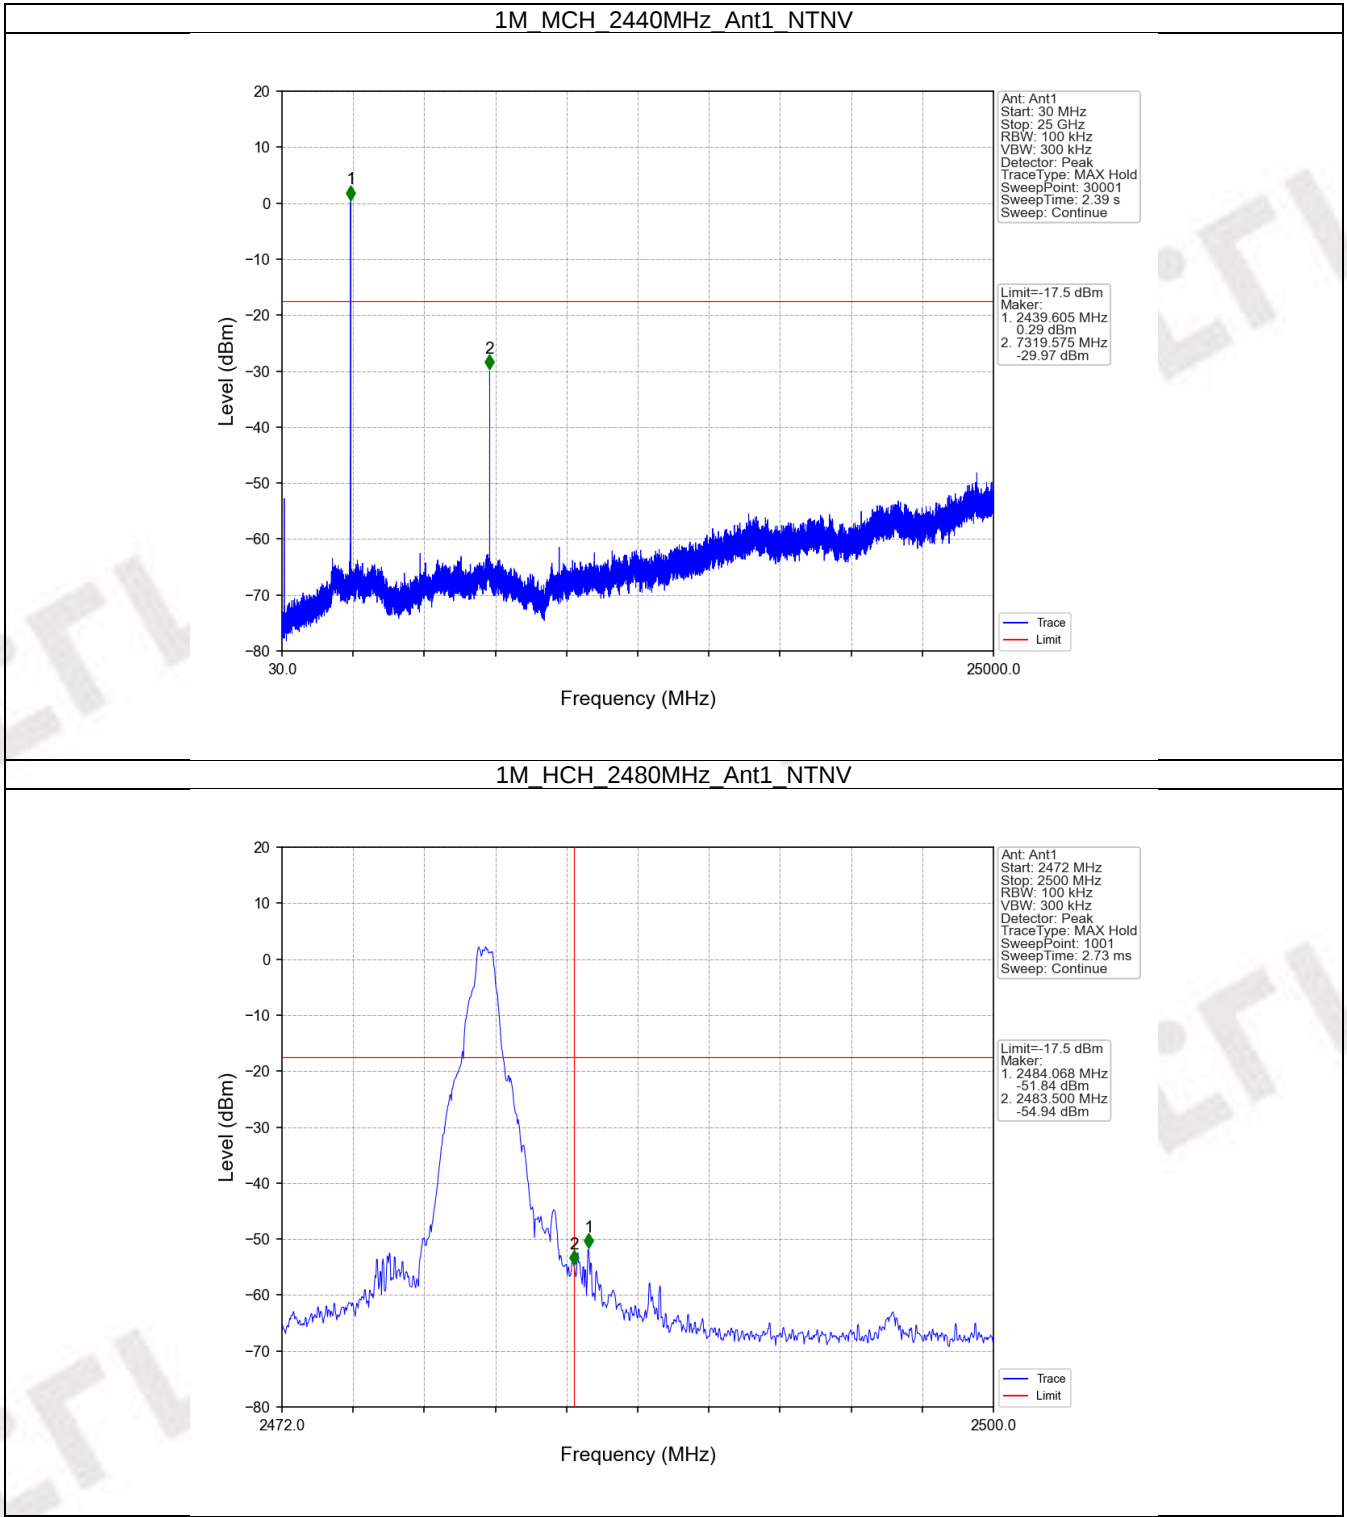

FCCID: 2A4CE-A6LMAX

