

FCC Test Report

(PART 27)

Report No.: RF181001C08-9

FCC ID: A4RG020B

Model Name: G020B

Received Date: Oct. 01, 2018

Test Date: Oct. 23, 2018 ~ Nov. 01, 2018

Issued Date: Dec. 27, 2018

Applicant: Google LLC

Address: 1600 Amphitheatre Parkway, Mountain View, CA 94043, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	9
2.2 Test Site and Instruments	10
3 General Information	11
3.1 General Description of EUT	11
3.2 Configuration of System under Test	14
3.2.1 Description of Support Units	14
3.3 Test Mode Applicability and Tested Channel Detail	15
3.4 EUT Operating Conditions	23
3.5 General Description of Applied Standards	23
4 Test Types and Results	24
4.1 Output Power Measurement	24
4.1.1 Limits of Output Power Measurement	24
4.1.2 Test Procedures	24
4.1.3 Test Setup	25
4.1.4 Test Results	26
4.2 Modulation Characteristics Measurement	51
4.2.1 Limits of Modulation Characteristics	51
4.2.2 Test Setup	51
4.2.3 Test Procedure	51
4.2.4 Test Results	52
4.3 Frequency Stability Measurement	57
4.3.1 Limits of Frequency Stability Measurement	57
4.3.2 Test Procedure	57
4.3.3 Test Setup	57
4.3.4 Test Results	58
4.4 Occupied Bandwidth Measurement	79
4.4.1 Limits of Occupied Bandwidth Measurement	79
4.4.2 Test Procedure	79
4.4.3 Test Setup	79
4.4.4 Test Result	80
4.5 Band Edge Measurement	102
4.5.1 Limits of Band Edge Measurement	102
4.5.2 Test Setup	102
4.5.3 Test Procedures	102
4.5.4 Test Results	103
4.6 Peak to Average Ratio	125
4.6.1 Limits of Peak to Average Ratio Measurement	125
4.6.2 Test Setup	125
4.6.3 Test Procedures	125
4.6.4 Test Results	126
4.7 Conducted Spurious Emissions	137
4.7.1 Limits of Conducted Spurious Emissions Measurement	137
4.7.2 Test Setup	137
4.7.3 Test Procedure	137
4.7.4 Test Results	138
4.8 Radiated Emission Measurement	187
4.8.1 Limits of Radiated Emission Measurement	187
4.8.2 Test Procedure	187
4.8.3 Deviation from Test Standard	187
4.8.4 Test Setup	188

4.8.5 Test Results	189
5 Pictures of Test Arrangements.....	269
Appendix – Information on the Testing Laboratories	270

Release Control Record

Issue No.	Description	Date Issued
RF181001C08-9	Original Release	Dec. 27, 2018

1 Certificate of Conformity

Product: Smartphone

Model Name: G020B

Sample Status: Identical Prototype

Applicant: Google LLC

Test Date: Oct. 23, 2018 ~ Nov. 01, 2018

Standards: FCC Part 27, Subpart C, H, F, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Dec. 27, 2018
Ivonne Wu / Supervisor

Approved by :  , **Date:** Dec. 27, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (WCDMA)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Equivalent Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -34.22 dB at 32.91 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -33.47 dB at 43.58 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.64 dB at 44.55 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(c)(2)(4)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(c)(2)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(c)(2)&(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -20.46 dB at 1564.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 17)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -31.92 dB at 30.00 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 66)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -35.81 dB at 44.55 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Keysight	N9010A	MY56070348	Sep. 06, 2018	Sep. 05, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
MXG Vector signal generator Agilent	N5182B	MY53052658	May 24, 2018	May 23, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 16, 2017	Aug. 15, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is 7450F-10.

3 General Information

3.1 General Description of EUT

Product	Smartphone	
Model Name	G020B	
Status of EUT	Identical Prototype	
Power Supply Rating	3.85 Vdc (Li-ion battery) 5.0 Vdc or 9 Vdc or 12 Vdc (adapter) 5.0 Vdc (host equipment)	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
Frequency Range	WCDMA	1712.4 ~ 1752.6 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	699.7 ~ 715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz)	700.5 ~ 714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz)	706.5 ~ 713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz)	709.0 ~ 711.0 MHz
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1779.3 MHz
	LTE Band 66 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1778.5 MHz
	LTE Band 66 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1777.5 MHz
	LTE Band 66 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1775.0 MHz
	LTE Band 66 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1772.5 MHz
	LTE Band 66 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1770.0 MHz

Emission Designator	WCDMA	4M15F9W
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 12 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 12 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 12 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 13 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 13 (Channel Bandwidth: 10 MHz)	8M96W7D
	LTE Band 17 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 17 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 66 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 66 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 66 (Channel Bandwidth: 10 MHz)	8M98W7D
	LTE Band 66 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 66 (Channel Bandwidth: 20 MHz)	18M0W7D
Max. ERP Power	LTE Band 12 (Channel Bandwidth: 1.4 MHz)	91.20 mW
	LTE Band 12 (Channel Bandwidth: 3 MHz)	96.38 mW
	LTE Band 12 (Channel Bandwidth: 5 MHz)	101.62 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	107.40 mW
	LTE Band 13 (Channel Bandwidth: 5 MHz)	36.06 mW
	LTE Band 13 (Channel Bandwidth: 10 MHz)	45.50 mW
	LTE Band 17 (Channel Bandwidth: 5 MHz)	101.16 mW
	LTE Band 17 (Channel Bandwidth: 10 MHz)	106.91 mW
Max. EIRP Power	WCDMA	250.61 mW
	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	143.88 mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	151.36 mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	159.59 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	167.49 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	176.60 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	186.64 mW
	LTE Band 66 (Channel Bandwidth: 1.4 MHz)	149.62 mW
	LTE Band 66 (Channel Bandwidth: 3 MHz)	157.76 mW
	LTE Band 66 (Channel Bandwidth: 5 MHz)	165.96 mW
	LTE Band 66 (Channel Bandwidth: 10 MHz)	174.58 mW
	LTE Band 66 (Channel Bandwidth: 15 MHz)	184.50 mW
	LTE Band 66 (Channel Bandwidth: 20 MHz)	194.54 mW


Antenna Type	PIFA Antenna	
Antenna Gain	WCDMA	-0.6 dBi
	LTE Band 4	-0.6 dBi
	LTE Band 12	-3.5 dBi
	LTE Band 13	-4.5 dBi
	LTE Band 17	-3.5 dBi
	LTE Band 66	-0.8 dBi
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:


- There're 2 configurations for the EUT listed as below.
 Main Sample: EUT + Battery 1
 2nd Sample: EUT + Battery 2
 ✧ After pre-tested with the EUT, only the worst configuration (main sample) was chosen for the final test.
- The EUT's accessories list refers to Ext. Pho.
- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

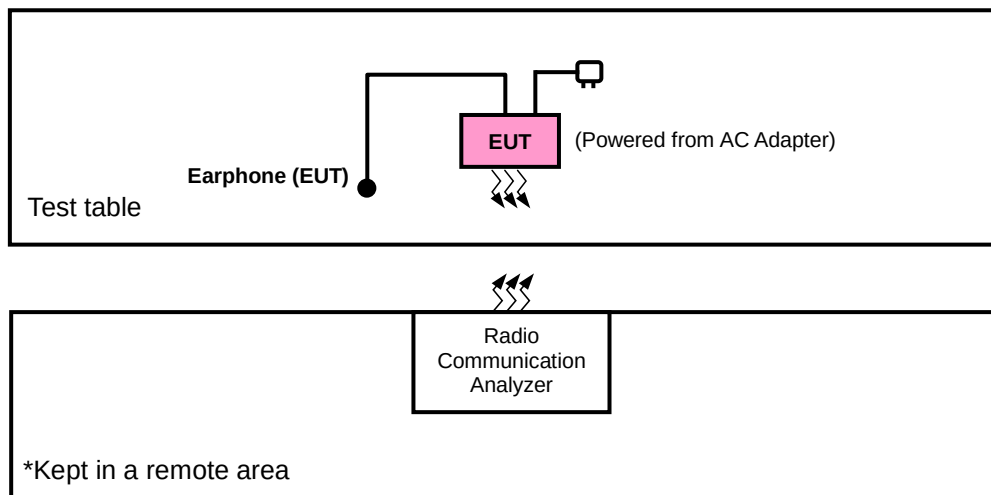

<E.R.P. / E.I.R.P. Test>

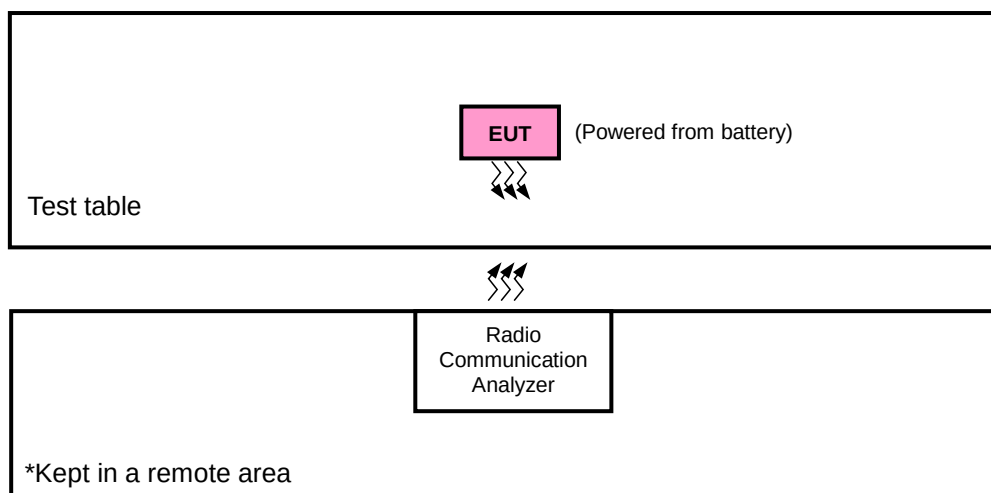

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
WCDMA	Y-plane	Y-axis
LTE Band 4	Y-plane	Y-axis
LTE Band 12	Y-plane	X-axis
LTE Band 13	Y-plane	Z-axis
LTE Band 17	Y-plane	X-axis
LTE Band 66	Y-plane	Y-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
-	Modulation Characteristics	1312 to 1513	1413	WCDMA
-	Frequency Stability	1312 to 1513	1312, 1513	WCDMA
-	Occupied Bandwidth	1312 to 1513	1312, 1413, 1513	WCDMA
-	Band Edge	1312 to 1513	1312, 1513	WCDMA
-	Peak to Average Ratio	1312 to 1513	1312, 1413, 1513	WCDMA
-	Conducted Emission	1312 to 1513	1312, 1413, 1513	WCDMA
-	Radiated Emission	1312 to 1513	1312, 1413, 1513	WCDMA

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	20000 to 20350	20000	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			20393	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			20385	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			20375	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			20350	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
			20325	15 MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
			20300	20 MHz	QPSK	1 RB / 99 RB Offset
						100 RB / 0 RB Offset
-	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23060 to 23130	23060	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	23017 to 23173	23017, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Band Edge	23017 to 23173	23017	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			23173	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		23025 to 23165	23025	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			23165	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		23035 to 23155	23035	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23155	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
-	Conducted Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23017 to 23173	23017, 23095, 23173	1.4 MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23230	23230	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	23205 to 23255	23205, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Band Edge	23205 to 23255	23205	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23255	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			23230	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 17

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	23780 to 23800	23780	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Frequency Stability	23755 to 23825	23755, 23825	5 MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23780, 23800	10 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
-	Band Edge	23755 to 23825	23755	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			23825	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		23780 to 23800	23780	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			23800	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
-	Conducted Emission	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK	1 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 66

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 2 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 7 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 12 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 24 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 37 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 50 RB Offset
-	Modulation Characteristics	132072 to 132572	132072	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Frequency Stability	131979 to 132665	131979, 132665	1.4 MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	131987, 132657	3 MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	131997, 132647	5 MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132022, 132622	10 MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132047, 132597	15 MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132072, 132572	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM, 64QAM	6 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM, 64QAM	15 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM, 64QAM	25 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM, 64QAM	50 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM, 64QAM	75 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM, 64QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Band Edge	131979 to 132665	131979	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			132665	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		131987 to 132657	131987	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			132657	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		131997 to 132647	131997	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			132647	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		132022 to 132622	132022	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			132622	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
		132047 to 132597	132047	15 MHz	QPSK	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
			132597	15 MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
-	Conducted Emission	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK	1 RB / 2 RB Offset
		131987 to 132657	131987, 132322, 132657	3 MHz	QPSK	1 RB / 7 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK	1 RB / 12 RB Offset
		132022 to 132622	132022, 132322, 132622	10 MHz	QPSK	1 RB / 24 RB Offset
		132047 to 132597	132047, 132322, 132597	15 MHz	QPSK	1 RB / 37 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK	1 RB / 50 RB Offset
-	Radiated Emission	131979 to 132665	131979, 132322, 132665	1.4 MHz	QPSK	1 RB / 2 RB Offset
		131997 to 132647	131997, 132322, 132647	5 MHz	QPSK	1 RB / 12 RB Offset
		132072 to 132572	132072, 132322, 132572	20 MHz	QPSK	1 RB / 50 RB Offset

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	3.85 Vdc	Thomas Wei
Modulation Characteristics	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Frequency Stability	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Band Edge	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Conducted Emission	25 deg. C, 65 % RH	3.85 Vdc	Wayne Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Thomas Wei

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 746-757 MHz, 776-788 MHz and 805-806 MHz band are limited to 3 watts ERP

Portable stations (hand-held device) operating in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for WCDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

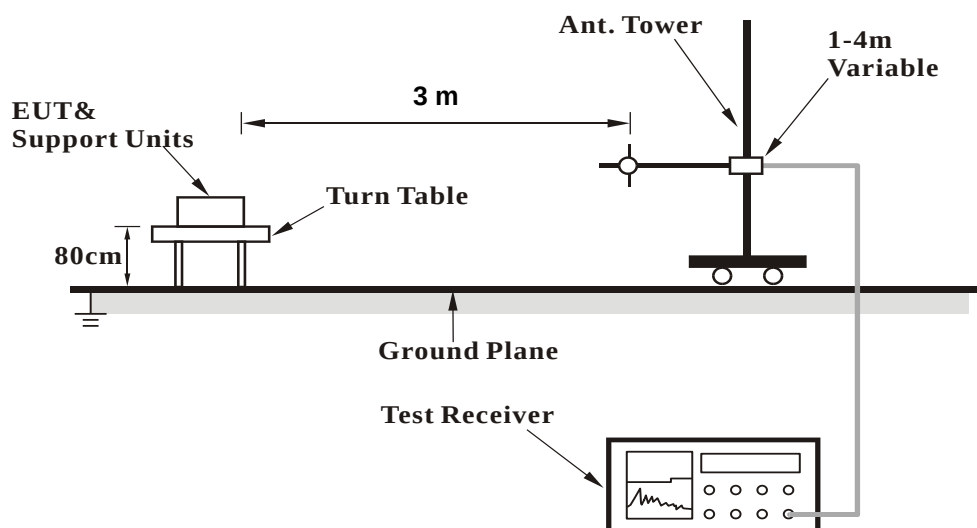


<Radiated Emission above 1 GHz>

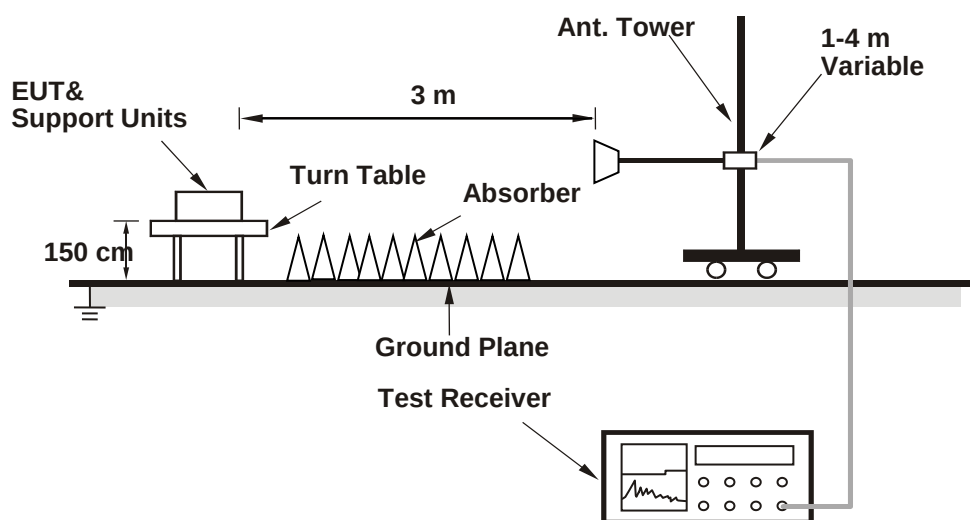

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

The worst configuration mode is presented in the report as below. Please refer to SAR test report for more detail test mode.

Band		TX Antenna	WLAN Function	Body-Worn/Hotspot
WCDMA	B4	Ant 0	WLAN-Off	Body-Worn/Hotspot
LTE	B4	Ant 0	WLAN-Off	Body-Worn/Hotspot
	B12	Ant 0	WLAN-Off	Body-Worn/Hotspot
	B13	Ant 0	WLAN-Off	Body-Worn/Hotspot
	B17	Ant 0	WLAN-Off	Body-Worn/Hotspot
	B66	Ant 0	WLAN-Off	Body-Worn/Hotspot

Conducted Output Power (dBm)

Band	WCDMA IV		
Mode	Body-Worn / Hotspot		
Tx Antenna	Ant-0		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	23.21	23.14	23.07
HSDPA Subtest-1	22.18	22.11	22.04
HSDPA Subtest-2	22.20	22.13	22.06
HSDPA Subtest-3	21.69	21.62	21.55
HSDPA Subtest-4	21.69	21.62	21.55
DC-HSDPA Subtest-1	22.09	22.04	22.02
DC-HSDPA Subtest-2	22.06	22.03	22.02
DC-HSDPA Subtest-3	21.65	21.62	21.54
DC-HSDPA Subtest-4	21.61	21.60	21.53
HSUPA Subtest-1	22.20	22.13	22.06
HSUPA Subtest-2	20.21	20.14	20.07
HSUPA Subtest-3	21.19	21.12	21.05
HSUPA Subtest-4	20.11	20.04	19.97
HSUPA Subtest-5	22.17	22.10	22.03

LTE Band 4															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300				Channel		20025	20175	20325	
		Frequency (MHz)		1720.0	1732.5	1745.0				Frequency (MHz)		1717.5	1732.5	1747.5	
20M	QPSK	1	0	23.62	23.69	23.59	0	15M	QPSK	1	0	23.56	23.63	23.53	0
		1	50	23.58	23.65	23.55	0			1	37	23.52	23.59	23.49	0
		1	99	23.46	23.53	23.43	0			1	74	23.40	23.47	23.37	0
		50	0	22.50	22.57	22.47	1			36	0	22.44	22.51	22.41	1
		50	25	22.46	22.54	22.42	1			36	19	22.40	22.48	22.36	1
		50	50	22.44	22.51	22.41	1			36	39	22.38	22.45	22.35	1
		100	0	22.42	22.49	22.39	1			75	0	22.36	22.43	22.33	1
	16QAM	1	0	22.99	22.95	22.92	1		16QAM	1	0	22.95	22.91	22.88	1
		1	50	22.95	22.91	22.88	1			1	37	22.91	22.87	22.84	1
		1	99	22.88	22.84	22.81	1			1	74	22.84	22.80	22.77	1
		50	0	21.73	21.69	21.66	2			36	0	21.69	21.65	21.62	2
		50	25	21.63	21.59	21.56	2			36	19	21.59	21.55	21.52	2
		50	50	21.59	21.55	21.52	2			36	39	21.55	21.51	21.48	2
		100	0	21.72	21.68	21.65	2			75	0	21.68	21.64	21.61	2
	64QAM	1	0	21.96	21.92	21.89	2		64QAM	1	0	21.89	21.85	21.82	2
		1	50	21.92	21.88	21.85	2			1	37	21.85	21.81	21.78	2
		1	99	21.85	21.81	21.78	2			1	74	21.78	21.74	21.71	2
		50	0	20.70	20.66	20.63	3			36	0	20.63	20.59	20.56	3
		50	25	20.60	20.56	20.53	3			36	19	20.53	20.49	20.46	3
		50	50	20.56	20.52	20.49	3			36	39	20.49	20.45	20.42	3
		100	0	20.69	20.65	20.62	3			75	0	20.62	20.58	20.55	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20000	20175	20350				Channel		19975	20175	20375	
		Frequency (MHz)		1715.0	1732.5	1750.0				Frequency (MHz)		1712.5	1732.5	1752.5	
10M	QPSK	1	0	23.50	23.57	23.47	0	5M	QPSK	1	0	23.46	23.53	23.43	0
		1	24	23.46	23.53	23.43	0			1	12	23.42	23.49	23.39	0
		1	49	23.34	23.41	23.31	0			1	24	23.30	23.37	23.27	0
		25	0	22.38	22.45	22.35	1			12	0	22.34	22.41	22.31	1
		25	12	22.34	22.42	22.30	1			12	6	22.30	22.38	22.26	1
		25	25	22.32	22.39	22.29	1			12	13	22.28	22.35	22.25	1
		50	0	22.30	22.37	22.27	1			25	0	22.26	22.33	22.23	1
	16QAM	1	0	22.90	22.86	22.83	1		16QAM	1	0	22.89	22.85	22.82	1
		1	24	22.86	22.82	22.79	1			1	12	22.85	22.81	22.78	1
		1	49	22.79	22.75	22.72	1			1	24	22.78	22.74	22.71	1
		25	0	21.64	21.60	21.57	2			12	0	21.63	21.59	21.56	2
		25	12	21.54	21.50	21.47	2			12	6	21.53	21.49	21.46	2
		25	25	21.50	21.46	21.43	2			12	13	21.49	21.45	21.42	2
		50	0	21.63	21.59	21.56	2			25	0	21.62	21.58	21.55	2
	64QAM	1	0	21.86	21.82	21.79	2		64QAM	1	0	21.83	21.79	21.76	2
		1	24	21.82	21.78	21.75	2			1	12	21.79	21.75	21.72	2
		1	49	21.75	21.71	21.68	2			1	24	21.72	21.68	21.65	2
		25	0	20.60	20.56	20.53	3			12	0	20.57	20.53	20.50	3
		25	12	20.50	20.46	20.43	3			12	6	20.47	20.43	20.40	3
		25	25	20.46	20.42	20.39	3			12	13	20.43	20.39	20.36	3
		50	0	20.59	20.55	20.52	3			25	0	20.56	20.52	20.49	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		19965	20175	20385				Channel		19957	20175	20393	
		Frequency (MHz)		1711.5	1732.5	1753.5				Frequency (MHz)		1710.7	1732.5	1754.3	
3M	QPSK	1	0	23.37	23.44	23.34	0	1.4M	QPSK	1	0	23.31	23.38	23.28	0
		1	7	23.33	23.40	23.30	0			1	2	23.27	23.34	23.24	0
		1	14	23.21	23.28	23.18	0			1	5	23.15	23.22	23.12	0
		8	0	22.25	22.32	22.22	1			3	0	23.19	23.26	23.16	0
		8	3	22.21	22.29	22.17	1			3	1	23.15	23.23	23.11	0
		8	7	22.19	22.26	22.16	1			3	3	23.13	23.20	23.10	0
		15	0	22.17	22.24	22.14	1			6	0	22.11	22.18	22.08	1
	16QAM	1	0	22.82	22.78	22.75	1		16QAM	1	0	22.79	22.75	22.72	1
		1	7	22.78	22.74	22.71	1			1	2	22.75	22.71	22.68	1
		1	14	22.71	22.67	22.64	1			1	5	22.68	22.64	22.61	1
		8	0	21.56	21.52	21.49	2			3	0	22.53	22.49	22.46	1
		8	3	21.46	21.42	21.39	2			3	1	22.43	22.39	22.36	1
		8	7	21.42	21.38	21.35	2			3	3	22.39	22.35	22.32	1
		15	0	21.55	21.51	21.48	2			6	0	21.52	21.48	21.45	2
	64QAM	1	0	21.80	21.76	21.73	2		64QAM	1	0	21.71	21.67	21.64	2
		1	7	21.76	21.72	21.69	2			1	2	21.67	21.63	21.60	2
		1	14	21.69	21.65	21.62	2			1	5	21.60	21.56	21.53	2
		8	0	20.54	20.50	20.47	3			3	0	21.45	21.41	21.38	2
		8	3	20.44	20.40	20.37	3			3	1	21.35	21.31	21.28	2
		8	7	20.40	20.36	20.33	3			3	3	21.31	21.27	21.24	2
		15	0	20.53	20.49	20.46	3			6	0	20.44	20.40	20.37	3

LTE Band 12															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130				Channel		23035	23095	23155	
		Frequency (MHz)		704.0	707.5	711.0				Frequency (MHz)		701.5	707.5	713.5	
10M	QPSK	1	0	24.71	24.66	24.74	0	5M	QPSK	1	0	24.66	24.61	24.69	0
		1	24	24.68	24.63	24.71	0			1	12	24.63	24.58	24.66	0
		1	49	24.66	24.61	24.69	0			1	24	24.61	24.56	24.64	0
		25	0	23.77	23.72	23.80	1			12	0	23.72	23.67	23.75	1
		25	12	23.73	23.68	23.76	1			12	6	23.68	23.63	23.71	1
		25	25	23.71	23.66	23.74	1			12	13	23.66	23.61	23.69	1
		50	0	23.76	23.71	23.79	1			25	0	23.71	23.66	23.74	1
	16QAM	1	0	23.70	23.65	23.73	1		16QAM	1	0	23.65	23.60	23.68	1
		1	24	23.67	23.62	23.70	1			1	12	23.62	23.57	23.65	1
		1	49	23.65	23.60	23.68	1			1	24	23.60	23.55	23.63	1
		25	0	22.76	22.71	22.79	2			12	0	22.71	22.66	22.74	2
		25	12	22.72	22.67	22.75	2			12	6	22.67	22.62	22.70	2
		25	25	22.70	22.65	22.73	2			12	13	22.65	22.60	22.68	2
		50	0	22.75	22.70	22.78	2			25	0	22.70	22.65	22.73	2
	64QAM	1	0	22.72	22.67	22.75	2		64QAM	1	0	22.67	22.62	22.70	2
		1	24	22.69	22.64	22.72	2			1	12	22.64	22.59	22.67	2
		1	49	22.67	22.62	22.70	2			1	24	22.62	22.57	22.65	2
		25	0	21.78	21.73	21.81	3			12	0	21.73	21.68	21.76	3
		25	12	21.74	21.69	21.77	3			12	6	21.69	21.64	21.72	3
		25	25	21.72	21.67	21.75	3			12	13	21.67	21.62	21.70	3
		50	0	21.77	21.72	21.80	3			25	0	21.72	21.67	21.75	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23025	23095	23165				Channel		23017	23095	23173	
		Frequency (MHz)		700.5	707.5	714.5				Frequency (MHz)		699.7	707.5	715.3	
3M	QPSK	1	0	24.63	24.58	24.66	0	1.4M	QPSK	1	0	24.61	24.56	24.64	0
		1	7	24.60	24.55	24.63	0			1	2	24.58	24.53	24.61	0
		1	14	24.58	24.53	24.61	0			1	5	24.56	24.51	24.59	0
		8	0	23.69	23.64	23.72	1			3	0	24.56	24.51	24.59	0
		8	3	23.65	23.60	23.68	1			3	1	24.52	24.47	24.55	0
		8	7	23.63	23.58	23.66	1			3	3	24.50	24.45	24.53	0
		15	0	23.68	23.63	23.71	1			6	0	23.66	23.61	23.69	1
	16QAM	1	0	23.62	23.57	23.65	1		16QAM	1	0	23.60	23.55	23.63	1
		1	7	23.59	23.54	23.62	1			1	2	23.57	23.52	23.60	1
		1	14	23.57	23.52	23.60	1			1	5	23.55	23.50	23.58	1
		8	0	22.68	22.63	22.71	2			3	0	23.55	23.50	23.58	1
		8	3	22.64	22.59	22.67	2			3	1	23.51	23.46	23.54	1
		8	7	22.62	22.57	22.65	2			3	3	23.49	23.44	23.52	1
		15	0	22.67	22.62	22.70	2			6	0	22.65	22.60	22.68	2
	64QAM	1	0	22.64	22.59	22.67	2		64QAM	1	0	22.62	22.57	22.65	2
		1	7	22.61	22.56	22.64	2			1	2	22.59	22.54	22.62	2
		1	14	22.59	22.54	22.62	2			1	5	22.57	22.52	22.60	2
		8	0	21.70	21.65	21.73	3			3	0	22.57	22.52	22.60	2
		8	3	21.66	21.61	21.69	3			3	1	22.53	22.48	22.56	2
		8	7	21.64	21.59	21.67	3			3	3	22.51	22.46	22.54	2
		15	0	21.69	21.64	21.72	3			6	0	21.67	21.62	21.70	3

LTE Band 13															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel			23230					Channel		23205	23230	23225	
		Frequency (MHz)			782.0					Frequency (MHz)		779.5	782.0	784.5	
10M	QPSK	1	0		24.32		0	5M	QPSK	1	0	24.22	24.29	24.25	0
		1	24		24.3		0			1	12	24.20	24.27	24.23	0
		1	49		24.22		0			1	24	24.12	24.19	24.15	0
		25	0		23.36		1			12	0	23.26	23.33	23.29	1
		25	12		23.35		1			12	6	23.25	23.32	23.28	1
		25	25		23.32		1			12	13	23.22	23.29	23.25	1
		50	0		23.3		1			25	0	23.20	23.27	23.23	1
	16QAM	1	0		23.31		1		16QAM	1	0	23.20	23.27	23.23	1
		1	24		23.29		1			1	12	23.18	23.25	23.21	1
		1	49		23.21		1			1	24	23.10	23.17	23.13	1
		25	0		22.35		2			12	0	22.24	22.31	22.27	2
		25	12		22.34		2			12	6	22.23	22.30	22.26	2
		25	25		22.31		2			12	13	22.20	22.27	22.23	2
	64QAM	50	0		22.29		2		64QAM	25	0	22.18	22.25	22.21	2
		1	0		22.33		2			1	0	22.21	22.28	22.24	2
		1	24		22.31		2			1	12	22.19	22.26	22.22	2
		1	49		22.23		2			1	24	22.11	22.18	22.14	2
		25	0		21.37		3			12	0	21.25	21.32	21.28	3
		25	12		21.36		3			12	6	21.24	21.31	21.27	3
		25	25		21.33		3			12	13	21.21	21.28	21.24	3
		50	0		21.31		3			25	0	21.19	21.26	21.22	3

LTE Band 17															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800				Channel		23755	23790	23825	
		Frequency (MHz)		709.0	710.0	711.0				Frequency (MHz)		706.5	710.0	713.5	
10M	QPSK	1	0	24.69	24.68	24.66	0	5M	QPSK	1	0	24.64	24.63	24.61	0
		1	24	24.67	24.66	24.64	0			1	12	24.62	24.61	24.59	0
		1	49	24.64	24.63	24.61	0			1	24	24.59	24.58	24.56	0
		25	0	23.72	23.71	23.69	1			12	0	23.67	23.66	23.64	1
		25	12	23.69	23.68	23.66	1			12	6	23.64	23.63	23.61	1
		25	25	23.67	23.66	23.64	1			12	13	23.62	23.61	23.59	1
		50	0	23.70	23.69	23.67	1			25	0	23.65	23.64	23.62	1
	16QAM	1	0	23.67	23.66	23.64	1		16QAM	1	0	23.62	23.61	23.59	1
		1	24	23.65	23.64	23.62	1			1	12	23.60	23.59	23.57	1
		1	49	23.62	23.61	23.59	1			1	24	23.57	23.56	23.54	1
		25	0	22.70	22.69	22.67	2			12	0	22.65	22.64	22.62	2
		25	12	22.67	22.66	22.64	2			12	6	22.62	22.61	22.59	2
		25	25	22.65	22.64	22.62	2			12	13	22.60	22.59	22.57	2
		50	0	22.68	22.67	22.65	2			25	0	22.63	22.62	22.60	2
	64QAM	1	0	22.64	22.63	22.61	2		64QAM	1	0	22.59	22.58	22.56	2
		1	24	22.62	22.61	22.59	2			1	12	22.57	22.56	22.54	2
		1	49	22.59	22.58	22.56	2			1	24	22.54	22.53	22.51	2
		25	0	21.67	21.66	21.64	3			12	0	21.62	21.61	21.59	3
		25	12	21.64	21.63	21.61	3			12	6	21.59	21.58	21.56	3
		25	25	21.62	21.61	21.59	3			12	13	21.57	21.56	21.54	3
		50	0	21.65	21.64	21.62	3			25	0	21.60	21.59	21.57	3

LTE Band 66															
Body-Worn / Hotspot															
Ant-0															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572				Channel		132047	132322	132597	
		Frequency (MHz)		1720.0	1745.0	1770.0				Frequency (MHz)		1717.5	1745.0	1772.5	
20M	QPSK	1	0	23.49	23.40	23.43	0	15M	QPSK	1	0	23.43	23.34	23.37	0
		1	50	23.56	23.47	23.50	0			1	37	23.50	23.41	23.44	0
		1	99	23.50	23.41	23.44	0			1	74	23.44	23.35	23.38	0
		50	0	22.45	22.36	22.39	1			36	0	22.39	22.30	22.33	1
		50	25	22.41	22.32	22.35	1			36	19	22.35	22.26	22.29	1
		50	50	22.42	22.33	22.36	1			36	39	22.36	22.27	22.30	1
		100	0	22.42	22.33	22.36	1			75	0	22.36	22.27	22.30	1
	16QAM	1	0	22.47	22.38	22.41	1		16QAM	1	0	22.43	22.34	22.37	1
		1	50	22.54	22.45	22.48	1			1	37	22.50	22.41	22.44	1
		1	99	22.48	22.39	22.42	1			1	74	22.44	22.35	22.38	1
		50	0	21.43	21.34	21.37	2			36	0	21.39	21.30	21.33	2
		50	25	21.39	21.30	21.33	2			36	19	21.35	21.26	21.29	2
		50	50	21.40	21.31	21.34	2			36	39	21.36	21.27	21.30	2
		100	0	21.40	21.31	21.34	2			75	0	21.36	21.27	21.30	2
	64QAM	1	0	21.42	21.33	21.36	2		64QAM	1	0	21.35	21.26	21.29	2
		1	50	21.49	21.40	21.43	2			1	37	21.42	21.33	21.36	2
		1	99	21.43	21.34	21.37	2			1	74	21.36	21.27	21.30	2
		50	0	20.38	20.29	20.32	3			36	0	20.31	20.22	20.25	3
		50	25	20.34	20.25	20.28	3			36	19	20.27	20.18	20.21	3
		50	50	20.35	20.26	20.29	3			36	39	20.28	20.19	20.22	3
		100	0	20.35	20.26	20.29	3			75	0	20.28	20.19	20.22	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132022	132322	132622				Channel		131997	132322	132647	
		Frequency (MHz)		1715.0	1745.0	1775.0				Frequency (MHz)		1712.5	1745.0	1777.5	
10M	QPSK	1	0	23.37	23.28	23.31	0	5M	QPSK	1	0	23.33	23.24	23.27	0
		1	24	23.44	23.35	23.38	0			1	12	23.40	23.31	23.34	0
		1	49	23.38	23.29	23.32	0			1	24	23.34	23.25	23.28	0
		25	0	22.33	22.24	22.27	1			12	0	22.29	22.20	22.23	1
		25	12	22.29	22.20	22.23	1			12	6	22.25	22.16	22.19	1
		25	25	22.30	22.21	22.24	1			12	13	22.26	22.17	22.20	1
		50	0	22.30	22.21	22.24	1			25	0	22.26	22.17	22.20	1
	16QAM	1	0	22.38	22.29	22.32	1		16QAM	1	0	22.37	22.28	22.31	1
		1	24	22.45	22.36	22.39	1			1	12	22.44	22.35	22.38	1
		1	49	22.39	22.30	22.33	1			1	24	22.38	22.29	22.32	1
		25	0	21.34	21.25	21.28	2			12	0	21.33	21.24	21.27	2
		25	12	21.30	21.21	21.24	2			12	6	21.29	21.20	21.23	2
		25	25	21.31	21.22	21.25	2			12	13	21.30	21.21	21.24	2
		50	0	21.31	21.22	21.25	2			25	0	21.30	21.21	21.24	2
	64QAM	1	0	21.32	21.23	21.26	2		64QAM	1	0	21.29	21.20	21.23	2
		1	24	21.39	21.30	21.33	2			1	12	21.36	21.27	21.30	2
		1	49	21.33	21.24	21.27	2			1	24	21.30	21.21	21.24	2
		25	0	20.28	20.19	20.22	3			12	0	20.25	20.16	20.19	3
		25	12	20.24	20.15	20.18	3			12	6	20.21	20.12	20.15	3
		25	25	20.25	20.16	20.19	3			12	13	20.22	20.13	20.16	3
		50	0	20.25	20.16	20.19	3			25	0	20.22	20.13	20.16	3
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		131987	132322	132657				Channel		131979	132322	132665	
		Frequency (MHz)		1711.5	1745.5	1778.5				Frequency (MHz)		1710.7	1745.0	1779.3	
3M	QPSK	1	0	23.24	23.15	23.18	0	1.4M	QPSK	1	0	23.18	23.09	23.12	0
		1	7	23.31	23.22	23.25	0			1	2	23.25	23.16	23.19	0
		1	14	23.25	23.16	23.19	0			1	5	23.19	23.10	23.13	0
		8	0	22.20	22.11	22.14	1			3	0	23.14	23.05	23.08	0
		8	3	22.16	22.07	22.10	1			3	1	23.10	23.01	23.04	0
		8	7	22.17	22.08	22.11	1			3	3	23.11	23.02	23.05	0
		15	0	22.17	22.08	22.11	1			6	0	22.11	22.02	22.05	1
	16QAM	1	0	22.30	22.21	22.24	1		16QAM	1	0	22.27	22.18	22.21	1
		1	7	22.37	22.28	22.31	1			1	2	22.34	22.25	22.28	1
		1	14	22.31	22.22	22.25	1			1	5	22.28	22.19	22.22	1
		8	0	21.26	21.17	21.20	2			3	0	22.23	22.14	22.17	1
		8	3	21.22	21.13	21.16	2			3	1	22.19	22.10	22.13	1
		8	7	21.23	21.14	21.17	2			3	3	22.20	22.11	22.14	1
		15	0	21.23	21.14	21.17	2			6	0	21.20	21.11	21.14	2
	64QAM	1	0	21.26	21.17	21.20	2		64QAM	1	0	21.17	21.08	21.11	2
		1	7	21.33	21.24	21.27	2			1	2	21.24	21.15	21.18	2
		1	14	21.27	21.18	21.21	2			1	5	21.18	21.09	21.12	2
		8	0	20.22	20.13	20.16	3			3	0	21.13	21.04	21.07	2
		8	3	20.18	20.09	20.12	3			3	1	21.09	21.00	21.03	2
		8	7	20.19	20.10	20.13	3			3	3	21.10	21.01	21.04	2
		15	0	20.19	20.10	20.13	3			6	0	20.10	20.01	20.04	3

ERP Power (dBm)

LTE Band 12							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23017	699.7	-8.67	30.36	19.54	89.95	H
	23095	707.5	-8.71	30.17	19.31	85.31	
	23173	715.3	-8.42	30.17	19.60	91.20	
	23017	699.7	-17.90	32.03	11.98	15.78	V
	23095	707.5	-18.02	31.98	11.81	15.17	
	23173	715.3	-17.77	32.06	12.14	16.37	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	23017	699.7	-9.66	30.36	18.55	71.61	H
	23095	707.5	-9.70	30.17	18.32	67.92	
	23173	715.3	-9.41	30.17	18.61	72.61	
	23017	699.7	-18.89	32.03	10.99	12.56	V
	23095	707.5	-19.01	31.98	10.82	12.08	
	23173	715.3	-18.76	32.06	11.15	13.03	
Channel Bandwidth: 1.4 MHz / 64QAM							
Y	23017	699.7	-10.67	30.36	17.54	56.75	H
	23095	707.5	-10.71	30.17	17.31	53.83	
	23173	715.3	-10.42	30.17	17.60	57.54	
	23017	699.7	-19.90	32.03	9.98	9.95	V
	23095	707.5	-20.02	31.98	9.81	9.57	
	23173	715.3	-19.77	32.06	10.14	10.33	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23025	700.5	-8.24	30.17	19.78	95.06	H
	23095	707.5	-8.47	30.17	19.55	90.16	
	23165	714.5	-8.19	30.18	19.84	96.38	
	23025	700.5	-17.59	31.96	12.22	16.67	V
	23095	707.5	-17.78	31.98	12.05	16.03	
	23165	714.5	-17.50	32.03	12.38	17.30	
Channel Bandwidth: 3 MHz / 16QAM							
Y	23025	700.5	-9.26	30.17	18.76	75.16	H
	23095	707.5	-9.49	30.17	18.53	71.29	
	23165	714.5	-9.21	30.18	18.82	76.21	
	23025	700.5	-18.61	31.96	11.20	13.18	V
	23095	707.5	-18.80	31.98	11.03	12.68	
	23165	714.5	-18.52	32.03	11.36	13.68	
Channel Bandwidth: 3 MHz / 64QAM							
Y	23025	700.5	-10.25	30.17	17.77	59.84	H
	23095	707.5	-10.48	30.17	17.54	56.75	
	23165	714.5	-10.20	30.18	17.83	60.67	
	23025	700.5	-19.60	31.96	10.21	10.50	V
	23095	707.5	-19.79	31.98	10.04	10.09	
	23165	714.5	-19.51	32.03	10.37	10.89	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23035	701.5	-8.01	30.17	20.01	100.23	H
	23095	707.5	-8.24	30.17	19.78	95.06	
	23155	713.5	-7.96	30.18	20.07	101.62	
	23035	701.5	-17.36	31.96	12.45	17.58	V
	23095	707.5	-17.55	31.98	12.28	16.90	
	23155	713.5	-17.27	32.03	12.61	18.24	
Channel Bandwidth: 5 MHz / 16QAM							
Y	23035	701.5	-9.02	30.17	19.00	79.43	H
	23095	707.5	-9.25	30.17	18.77	75.34	
	23155	713.5	-8.97	30.18	19.06	80.54	
	23035	701.5	-18.37	31.96	11.44	13.93	V
	23095	707.5	-18.56	31.98	11.27	13.40	
	23155	713.5	-18.28	32.03	11.60	14.45	
Channel Bandwidth: 5 MHz / 64QAM							
Y	23035	701.5	-10.01	30.17	18.01	63.24	H
	23095	707.5	-10.24	30.17	17.78	59.98	
	23155	713.5	-9.96	30.18	18.07	64.12	
	23035	701.5	-19.36	31.96	10.45	11.09	V
	23095	707.5	-19.55	31.98	10.28	10.67	
	23155	713.5	-19.27	32.03	10.61	11.51	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23060	704.0	-7.77	30.17	20.25	105.93	H
	23095	707.5	-8.00	30.17	20.02	100.46	
	23130	711.0	-7.72	30.18	20.31	107.40	
	23060	704.0	-17.12	31.96	12.69	18.58	V
	23095	707.5	-17.31	31.98	12.52	17.86	
	23130	711.0	-17.03	32.03	12.85	19.28	
Channel Bandwidth: 10 MHz / 16QAM							
Y	23060	704.0	-8.79	30.17	19.23	83.75	H
	23095	707.5	-9.02	30.17	19.00	79.43	
	23130	711.0	-8.74	30.18	19.29	84.92	
	23060	704.0	-18.14	31.96	11.67	14.69	V
	23095	707.5	-18.33	31.98	11.50	14.13	
	23130	711.0	-18.05	32.03	11.83	15.24	
Channel Bandwidth: 10 MHz / 64QAM							
Y	23060	704.0	-9.78	30.17	18.24	66.68	H
	23095	707.5	-10.01	30.17	18.01	63.24	
	23130	711.0	-9.73	30.18	18.30	67.61	
	23060	704.0	-19.13	31.96	10.68	11.69	V
	23095	707.5	-19.32	31.98	10.51	11.25	
	23130	711.0	-19.04	32.03	10.84	12.13	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23205	779.5	-14.80	32.24	15.29	33.81	H
	23230	782.0	-14.45	32.17	15.57	36.06	
	23255	784.5	-14.54	32.11	15.42	34.83	
	23205	779.5	-21.09	32.43	9.19	8.30	V
	23230	782.0	-20.86	32.42	9.41	8.73	
	23255	784.5	-20.96	32.46	9.35	8.61	
Channel Bandwidth: 5 MHz / 16QAM							
Y	23205	779.5	-15.81	32.24	14.28	26.79	H
	23230	782.0	-15.46	32.17	14.56	28.58	
	23255	784.5	-15.55	32.11	14.41	27.61	
	23205	779.5	-22.10	32.43	8.18	6.58	V
	23230	782.0	-21.87	32.42	8.40	6.92	
	23255	784.5	-21.97	32.46	8.34	6.82	
Channel Bandwidth: 5 MHz / 64QAM							
Y	23205	779.5	-16.80	32.24	13.29	21.33	H
	23230	782.0	-16.45	32.17	13.57	22.75	
	23255	784.5	-16.54	32.11	13.42	21.98	
	23205	779.5	-23.09	32.43	7.19	5.24	V
	23230	782.0	-22.86	32.42	7.41	5.51	
	23255	784.5	-22.96	32.46	7.35	5.43	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23230	782.0	-13.44	32.17	16.58	45.50	H
	23230	782.0	-19.85	32.42	10.42	11.02	V
Channel Bandwidth: 10 MHz / 16QAM							
Y	23230	782.0	-14.43	32.17	15.59	36.22	H
	23230	782.0	-20.84	32.42	9.43	8.77	V
Channel Bandwidth: 10 MHz / 64QAM							
Y	23230	782.0	-15.41	32.17	14.61	28.91	H
	23230	782.0	-21.82	32.42	8.45	7.00	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 17							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23755	706.5	-8.16	30.36	20.05	101.16	H
	23790	710.0	-8.21	30.17	19.81	95.72	
	23825	713.5	-8.41	30.17	19.61	91.41	
	23755	706.5	-17.17	32.03	12.71	18.66	V
	23790	710.0	-17.36	31.98	12.47	17.66	
	23825	713.5	-17.56	32.06	12.35	17.18	
Channel Bandwidth: 5 MHz / 16QAM							
Y	23755	706.5	-9.16	30.36	19.05	80.35	H
	23790	710.0	-9.21	30.17	18.81	76.03	
	23825	713.5	-9.41	30.17	18.61	72.61	
	23755	706.5	-18.17	32.03	11.71	14.83	V
	23790	710.0	-18.36	31.98	11.47	14.03	
	23825	713.5	-18.56	32.06	11.35	13.65	
Channel Bandwidth: 5 MHz / 64QAM							
Y	23755	706.5	-10.16	30.36	18.05	63.83	H
	23790	710.0	-10.21	30.17	17.81	60.39	
	23825	713.5	-10.41	30.17	17.61	57.68	
	23755	706.5	-19.17	32.03	10.71	11.78	V
	23790	710.0	-19.36	31.98	10.47	11.14	
	23825	713.5	-19.56	32.06	10.35	10.84	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 17							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	23780	709.0	-7.73	30.17	20.29	106.91	H
	23790	710.0	-7.97	30.17	20.05	101.16	
	23800	711.0	-8.18	30.18	19.85	96.61	
	23780	709.0	-16.86	31.96	12.95	19.72	V
	23790	710.0	-17.12	31.98	12.71	18.66	
	23800	711.0	-17.29	32.03	12.59	18.16	
Channel Bandwidth: 10 MHz / 16QAM							
Y	23780	709.0	-8.74	30.17	19.28	84.72	H
	23790	710.0	-8.98	30.17	19.04	80.17	
	23800	711.0	-9.19	30.18	18.84	76.56	
	23780	709.0	-17.87	31.96	11.94	15.63	V
	23790	710.0	-18.13	31.98	11.70	14.79	
	23800	711.0	-18.30	32.03	11.58	14.39	
Channel Bandwidth: 10 MHz / 64QAM							
Y	23780	709.0	-9.73	30.17	18.29	67.45	H
	23790	710.0	-9.97	30.17	18.05	63.83	
	23800	711.0	-10.18	30.18	17.85	60.95	
	23780	709.0	-18.86	31.96	10.95	12.45	V
	23790	710.0	-19.12	31.98	10.71	11.78	
	23800	711.0	-19.29	32.03	10.59	11.46	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	1312	1712.4	-16.44	36.29	19.85	96.61	H
	1413	1732.6	-17.24	36.69	19.45	88.10	
	1513	1752.6	-17.36	36.98	19.62	91.62	
	1312	1712.4	-13.12	37.11	23.99	250.61	V
	1413	1732.6	-14.08	37.60	23.52	224.91	
	1513	1752.6	-13.83	37.65	23.82	240.99	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19957	1710.7	-18.02	36.45	18.43	69.66	H
	20175	1732.5	-18.59	36.80	18.21	66.22	
	20393	1754.3	-18.22	36.94	18.72	74.47	
	19957	1710.7	-15.78	37.28	21.50	141.25	V
	20175	1732.5	-16.18	37.63	21.45	139.64	
	20393	1754.3	-16.06	37.64	21.58	143.88	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	19957	1710.7	-19.10	36.45	17.35	54.33	H
	20175	1732.5	-19.67	36.80	17.13	51.64	
	20393	1754.3	-19.30	36.94	17.64	58.08	
	19957	1710.7	-16.86	37.28	20.42	110.15	V
	20175	1732.5	-17.26	37.63	20.37	108.89	
	20393	1754.3	-17.14	37.64	20.50	112.20	
Channel Bandwidth: 1.4 MHz / 64QAM							
Y	19957	1710.7	-20.06	36.45	16.39	43.55	H
	20175	1732.5	-20.63	36.80	16.17	41.40	
	20393	1754.3	-20.26	36.94	16.68	46.56	
	19957	1710.7	-17.82	37.28	19.46	88.31	V
	20175	1732.5	-18.22	37.63	19.41	87.30	
	20393	1754.3	-18.10	37.64	19.54	89.95	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19965	1711.5	-17.80	36.45	18.65	73.28	H
	20175	1732.5	-18.37	36.80	18.43	69.66	
	20385	1753.5	-18.00	36.94	18.94	78.34	
	19965	1711.5	-15.56	37.28	21.72	148.59	V
	20175	1732.5	-15.96	37.63	21.67	146.89	
	20385	1753.5	-15.84	37.64	21.80	151.36	
Channel Bandwidth: 3 MHz / 16QAM							
Y	19965	1711.5	-18.85	36.45	17.60	57.54	H
	20175	1732.5	-19.42	36.80	17.38	54.70	
	20385	1753.5	-19.05	36.94	17.89	61.52	
	19965	1711.5	-16.61	37.28	20.67	116.68	V
	20175	1732.5	-17.01	37.63	20.62	115.35	
	20385	1753.5	-16.89	37.64	20.75	118.85	
Channel Bandwidth: 3 MHz / 64QAM							
Y	19965	1711.5	-19.82	36.45	16.63	46.03	H
	20175	1732.5	-20.39	36.80	16.41	43.75	
	20385	1753.5	-20.02	36.94	16.92	49.20	
	19965	1711.5	-17.58	37.28	19.70	93.33	V
	20175	1732.5	-17.98	37.63	19.65	92.26	
	20385	1753.5	-17.86	37.64	19.78	95.06	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	19975	1712.5	-17.57	36.45	18.88	77.27	H
	20175	1732.5	-18.14	36.80	18.66	73.45	
	20375	1752.5	-17.77	36.94	19.17	82.60	
	19975	1712.5	-15.33	37.28	21.95	156.68	V
	20175	1732.5	-15.73	37.63	21.90	154.88	
	20375	1752.5	-15.61	37.64	22.03	159.59	
Channel Bandwidth: 5 MHz / 16QAM							
Y	19975	1712.5	-18.63	36.45	17.82	60.53	H
	20175	1732.5	-19.20	36.80	17.60	57.54	
	20375	1752.5	-18.83	36.94	18.11	64.71	
	19975	1712.5	-16.39	37.28	20.89	122.74	V
	20175	1732.5	-16.79	37.63	20.84	121.34	
	20375	1752.5	-16.67	37.64	20.97	125.03	
Channel Bandwidth: 5 MHz / 64QAM							
Y	19975	1712.5	-19.59	36.45	16.86	48.53	H
	20175	1732.5	-20.16	36.80	16.64	46.13	
	20375	1752.5	-19.79	36.94	17.15	51.88	
	19975	1712.5	-17.35	37.28	19.93	98.40	V
	20175	1732.5	-17.75	37.63	19.88	97.27	
	20375	1752.5	-17.63	37.64	20.01	100.23	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20000	1715.0	-17.55	36.64	19.09	81.10	H
	20175	1732.5	-17.93	36.80	18.87	77.09	
	20350	1750.0	-17.42	36.80	19.38	86.70	
	20000	1715.0	-15.28	37.44	22.16	164.44	V
	20175	1732.5	-15.52	37.63	22.11	162.55	
	20350	1750.0	-15.40	37.64	22.24	167.49	
Channel Bandwidth: 10 MHz / 16QAM							
Y	20000	1715.0	-18.57	36.64	18.07	64.12	H
	20175	1732.5	-18.95	36.80	17.85	60.95	
	20350	1750.0	-18.44	36.80	18.36	68.55	
	20000	1715.0	-16.30	37.44	21.14	130.02	V
	20175	1732.5	-16.54	37.63	21.09	128.53	
	20350	1750.0	-16.42	37.64	21.22	132.43	
Channel Bandwidth: 10 MHz / 64QAM							
Y	20000	1715.0	-19.56	36.64	17.08	51.05	H
	20175	1732.5	-19.94	36.80	16.86	48.53	
	20350	1750.0	-19.43	36.80	17.37	54.58	
	20000	1715.0	-17.29	37.44	20.15	103.51	V
	20175	1732.5	-17.53	37.63	20.10	102.33	
	20350	1750.0	-17.41	37.64	20.23	105.44	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20025	1717.5	-17.13	36.45	19.32	85.51	H
	20175	1732.5	-17.70	36.80	19.10	81.28	
	20325	1747.5	-17.33	36.94	19.61	91.41	
	20025	1717.5	-14.89	37.28	22.39	173.38	V
	20175	1732.5	-15.29	37.63	22.34	171.40	
	20325	1747.5	-15.17	37.64	22.47	176.60	
Channel Bandwidth: 15 MHz / 16QAM							
Y	20025	1717.5	-18.14	36.45	18.31	67.76	H
	20175	1732.5	-18.71	36.80	18.09	64.42	
	20325	1747.5	-18.34	36.94	18.60	72.44	
	20025	1717.5	-15.90	37.28	21.38	137.40	V
	20175	1732.5	-16.30	37.63	21.33	135.83	
	20325	1747.5	-16.18	37.64	21.46	139.96	
Channel Bandwidth: 15 MHz / 64QAM							
Y	20025	1717.5	-19.14	36.45	17.31	53.83	H
	20175	1732.5	-19.71	36.80	17.09	51.17	
	20325	1747.5	-19.34	36.94	17.60	57.54	
	20025	1717.5	-16.90	37.28	20.38	109.14	V
	20175	1732.5	-17.30	37.63	20.33	107.89	
	20325	1747.5	-17.18	37.64	20.46	111.17	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	20050	1720.0	-16.89	36.45	19.56	90.36	H
	20175	1732.5	-17.46	36.80	19.34	85.90	
	20300	1745.0	-17.09	36.94	19.85	96.61	
	20050	1720.0	-14.65	37.28	22.63	183.23	V
	20175	1732.5	-15.05	37.63	22.58	181.13	
	20300	1745.0	-14.93	37.64	22.71	186.64	
Channel Bandwidth: 20 MHz / 16QAM							
Y	20050	1720.0	-17.91	36.45	18.54	71.45	H
	20175	1732.5	-18.48	36.80	18.32	67.92	
	20300	1745.0	-18.11	36.94	18.83	76.38	
	20050	1720.0	-15.67	37.28	21.61	144.88	V
	20175	1732.5	-16.07	37.63	21.56	143.22	
	20300	1745.0	-15.95	37.64	21.69	147.57	
Channel Bandwidth: 20 MHz / 64QAM							
Y	20050	1720.0	-18.90	36.45	17.55	56.89	H
	20175	1732.5	-19.47	36.80	17.33	54.08	
	20300	1745.0	-19.10	36.94	17.84	60.81	
	20050	1720.0	-16.66	37.28	20.62	115.35	V
	20175	1732.5	-17.06	37.63	20.57	114.02	
	20300	1745.0	-16.94	37.64	20.70	117.49	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	131979	1710.7	-19.07	36.45	17.38	54.70	H
	132322	1745.0	-20.09	36.80	16.71	46.88	
	132665	1779.3	-19.92	36.94	17.02	50.35	
	131979	1710.7	-15.53	37.28	21.75	149.62	V
	132322	1745.0	-16.32	37.63	21.31	135.21	
	132665	1779.3	-16.16	37.64	21.48	140.60	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	131979	1710.7	-20.08	36.45	16.37	43.35	H
	132322	1745.0	-21.10	36.80	15.70	37.15	
	132665	1779.3	-20.93	36.94	16.01	39.90	
	131979	1710.7	-16.54	37.28	20.74	118.58	V
	132322	1745.0	-17.33	37.63	20.30	107.15	
	132665	1779.3	-17.17	37.64	20.47	111.43	
Channel Bandwidth: 1.4 MHz / 64QAM							
Y	131979	1710.7	-21.12	36.45	15.33	34.12	H
	132322	1745.0	-22.14	36.80	14.66	29.24	
	132665	1779.3	-21.97	36.94	14.97	31.41	
	131979	1710.7	-17.58	37.28	19.70	93.33	V
	132322	1745.0	-18.37	37.63	19.26	84.33	
	132665	1779.3	-18.21	37.64	19.43	87.70	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	131987	1711.5	-18.84	36.45	17.61	57.68	H
	132322	1745.0	-19.86	36.80	16.94	49.43	
	132657	1778.5	-19.69	36.94	17.25	53.09	
	131987	1711.5	-15.30	37.28	21.98	157.76	V
	132322	1745.0	-16.09	37.63	21.54	142.56	
	132657	1778.5	-15.93	37.64	21.71	148.25	
Channel Bandwidth: 3 MHz / 16QAM							
Y	131987	1711.5	-19.85	36.45	16.60	45.71	H
	132322	1745.0	-20.87	36.80	15.93	39.17	
	132657	1778.5	-20.70	36.94	16.24	42.07	
	131987	1711.5	-16.31	37.28	20.97	125.03	V
	132322	1745.0	-17.10	37.63	20.53	112.98	
	132657	1778.5	-16.94	37.64	20.70	117.49	
Channel Bandwidth: 3 MHz / 64QAM							
Y	131987	1711.5	-20.88	36.45	15.57	36.06	H
	132322	1745.0	-21.90	36.80	14.90	30.90	
	132657	1778.5	-21.73	36.94	15.21	33.19	
	131987	1711.5	-17.34	37.28	19.94	98.63	V
	132322	1745.0	-18.13	37.63	19.50	89.13	
	132657	1778.5	-17.97	37.64	19.67	92.68	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	131997	1712.5	-18.62	36.45	17.83	60.67	H
	132322	1745.0	-19.64	36.80	17.16	52.00	
	132647	1777.5	-19.47	36.94	17.47	55.85	
	131997	1712.5	-15.08	37.28	22.20	165.96	V
	132322	1745.0	-15.87	37.63	21.76	149.97	
	132647	1777.5	-15.71	37.64	21.93	155.96	
Channel Bandwidth: 5 MHz / 16QAM							
Y	131997	1712.5	-19.63	36.45	16.82	48.08	H
	132322	1745.0	-20.65	36.80	16.15	41.21	
	132647	1777.5	-20.48	36.94	16.46	44.26	
	131997	1712.5	-16.09	37.28	21.19	131.52	V
	132322	1745.0	-16.88	37.63	20.75	118.85	
	132647	1777.5	-16.72	37.64	20.92	123.59	
Channel Bandwidth: 5 MHz / 64QAM							
Y	131997	1712.5	-20.65	36.45	15.80	38.02	H
	132322	1745.0	-21.67	36.80	15.13	32.58	
	132647	1777.5	-21.50	36.94	15.44	34.99	
	131997	1712.5	-17.11	37.28	20.17	103.99	V
	132322	1745.0	-17.90	37.63	19.73	93.97	
	132647	1777.5	-17.74	37.64	19.90	97.72	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	132022	1715.0	-18.59	36.64	18.05	63.83	H
	132322	1745.0	-19.42	36.80	17.38	54.70	
	132622	1775.0	-19.11	36.80	17.69	58.75	
	132022	1715.0	-15.02	37.44	22.42	174.58	V
	132322	1745.0	-15.65	37.63	21.98	157.76	
	132622	1775.0	-15.49	37.64	22.15	164.06	
Channel Bandwidth: 10 MHz / 16QAM							
Y	132022	1715.0	-19.58	36.64	17.06	50.82	H
	132322	1745.0	-20.41	36.80	16.39	43.55	
	132622	1775.0	-20.10	36.80	16.70	46.77	
	132022	1715.0	-16.01	37.44	21.43	139.00	V
	132322	1745.0	-16.64	37.63	20.99	125.60	
	132622	1775.0	-16.48	37.64	21.16	130.62	
Channel Bandwidth: 10 MHz / 64QAM							
Y	132022	1715.0	-20.59	36.64	16.05	40.27	H
	132322	1745.0	-21.42	36.80	15.38	34.51	
	132622	1775.0	-21.11	36.80	15.69	37.07	
	132022	1715.0	-17.02	37.44	20.42	110.15	V
	132322	1745.0	-17.65	37.63	19.98	99.54	
	132622	1775.0	-17.49	37.64	20.15	103.51	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	132047	1717.5	-18.16	36.45	18.29	67.45	H
	132322	1745.0	-19.18	36.80	17.62	57.81	
	132597	1772.5	-19.01	36.94	17.93	62.09	
	132047	1717.5	-14.62	37.28	22.66	184.50	V
	132322	1745.0	-15.41	37.63	22.22	166.72	
	132597	1772.5	-15.25	37.64	22.39	173.38	
Channel Bandwidth: 15 MHz / 16QAM							
Y	132047	1717.5	-19.16	36.45	17.29	53.58	H
	132322	1745.0	-20.18	36.80	16.62	45.92	
	132597	1772.5	-20.01	36.94	16.93	49.32	
	132047	1717.5	-15.62	37.28	21.66	146.55	V
	132322	1745.0	-16.41	37.63	21.22	132.43	
	132597	1772.5	-16.25	37.64	21.39	137.72	
Channel Bandwidth: 15 MHz / 64QAM							
Y	132047	1717.5	-20.17	36.45	16.28	42.46	H
	132322	1745.0	-21.19	36.80	15.61	36.39	
	132597	1772.5	-21.02	36.94	15.92	39.08	
	132047	1717.5	-16.63	37.28	20.65	116.14	V
	132322	1745.0	-17.42	37.63	20.21	104.95	
	132597	1772.5	-17.26	37.64	20.38	109.14	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 66							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	132072	1720.0	-17.93	36.45	18.52	71.12	H
	132322	1745.0	-18.95	36.80	17.85	60.95	
	132572	1770.0	-18.78	36.94	18.16	65.46	
	132072	1720.0	-14.39	37.28	22.89	194.54	V
	132322	1745.0	-15.18	37.63	22.45	175.79	
	132572	1770.0	-15.02	37.64	22.62	182.81	
Channel Bandwidth: 20 MHz / 16QAM							
Y	132072	1720.0	-18.94	36.45	17.51	56.36	H
	132322	1745.0	-19.96	36.80	16.84	48.31	
	132572	1770.0	-19.79	36.94	17.15	51.88	
	132072	1720.0	-15.40	37.28	21.88	154.17	V
	132322	1745.0	-16.19	37.63	21.44	139.32	
	132572	1770.0	-16.03	37.64	21.61	144.88	
Channel Bandwidth: 20 MHz / 64QAM							
Y	132072	1720.0	-19.93	36.45	16.52	44.87	H
	132322	1745.0	-20.95	36.80	15.85	38.46	
	132572	1770.0	-20.78	36.94	16.16	41.30	
	132072	1720.0	-16.39	37.28	20.89	122.74	V
	132322	1745.0	-17.18	37.63	20.45	110.92	
	132572	1770.0	-17.02	37.64	20.62	115.35	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

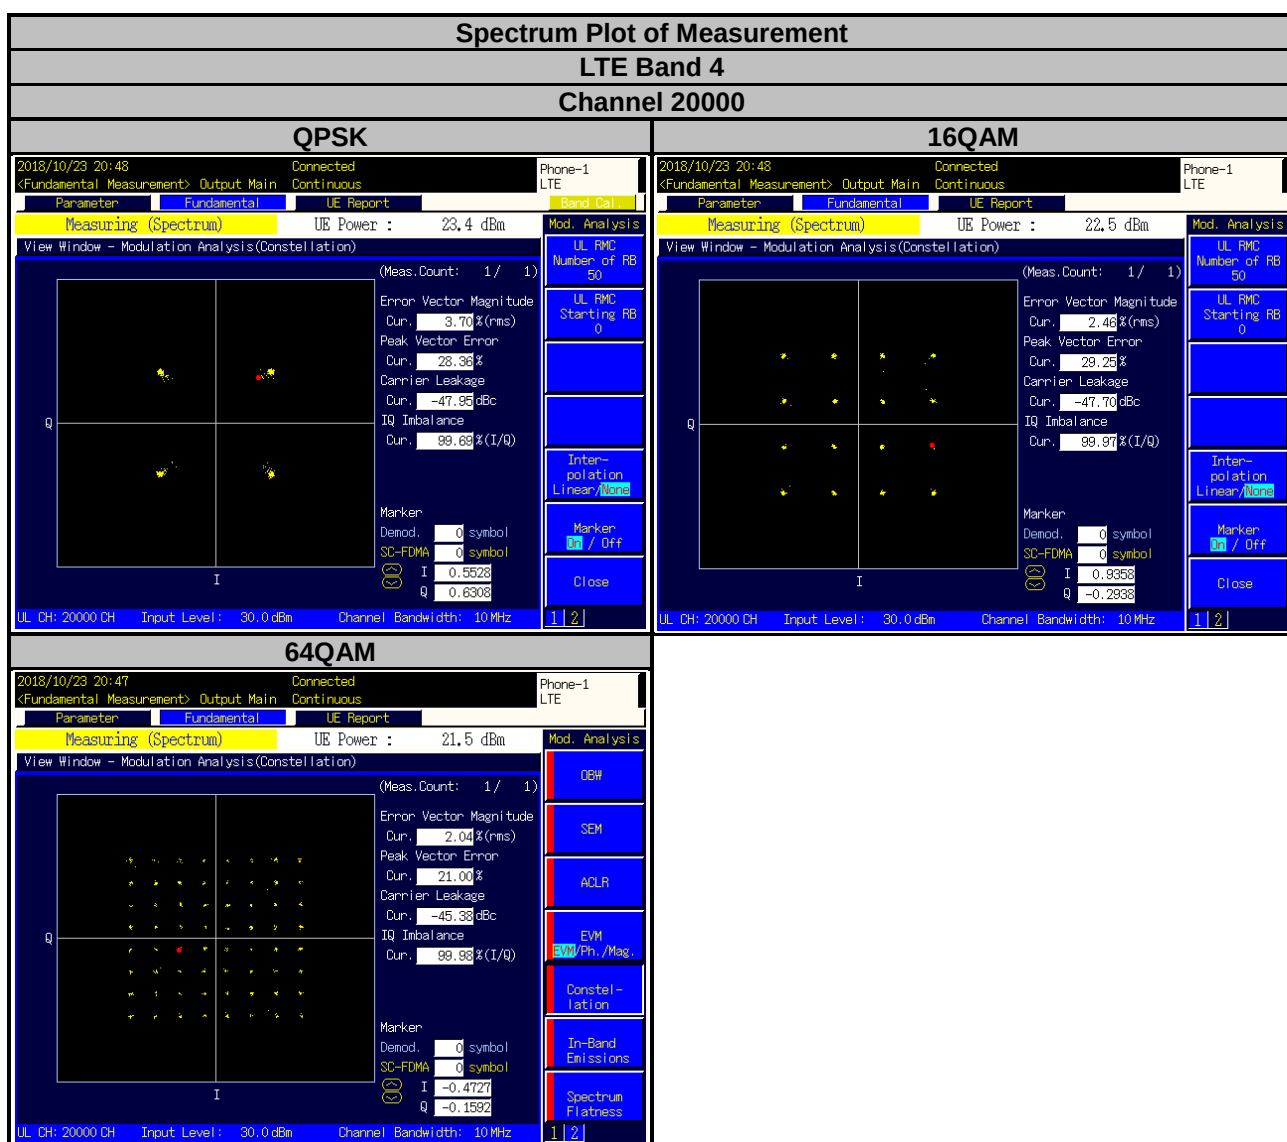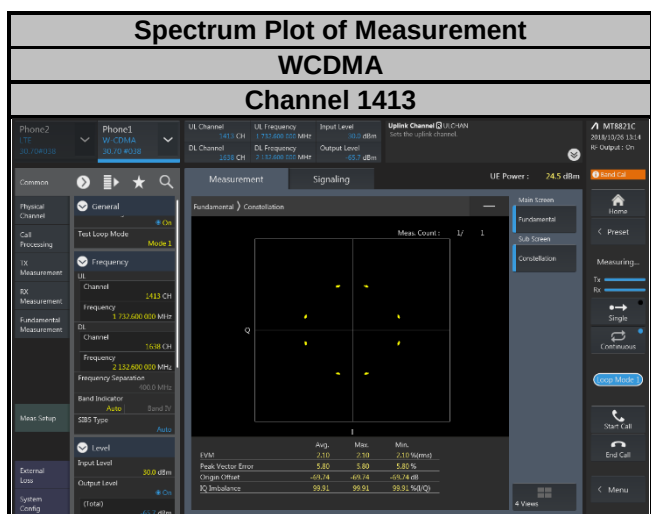



Spectrum Plot of Measurement

LTE Band 12


Channel 23060

QPSK

16QAM

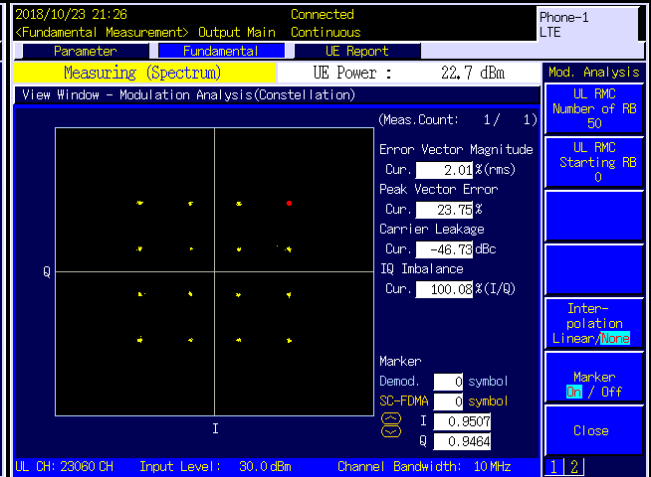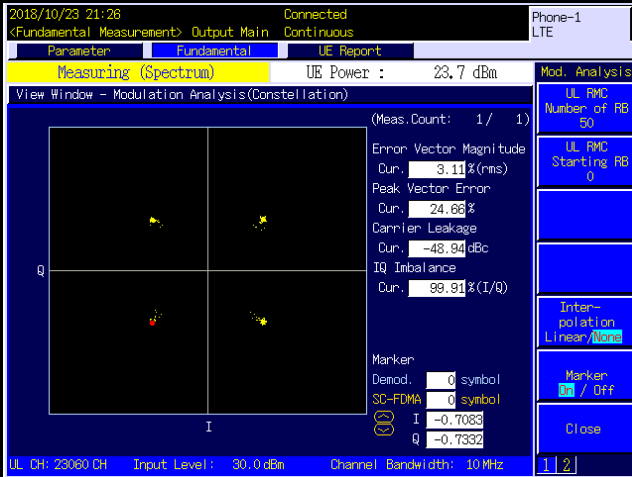

64QAM

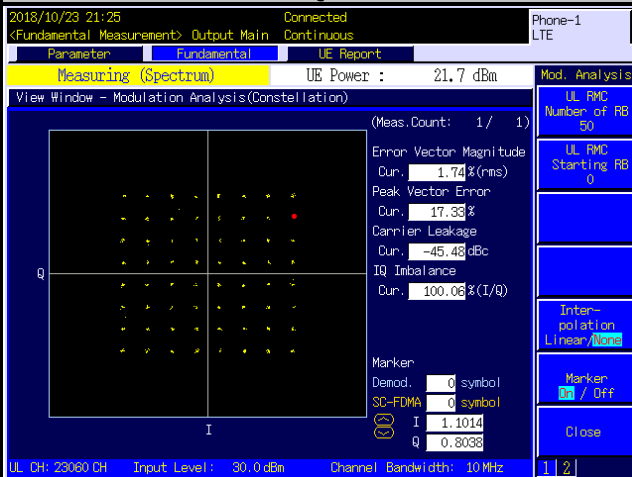



Spectrum Plot of Measurement

LTE Band 13


Channel 23230

QPSK

16QAM

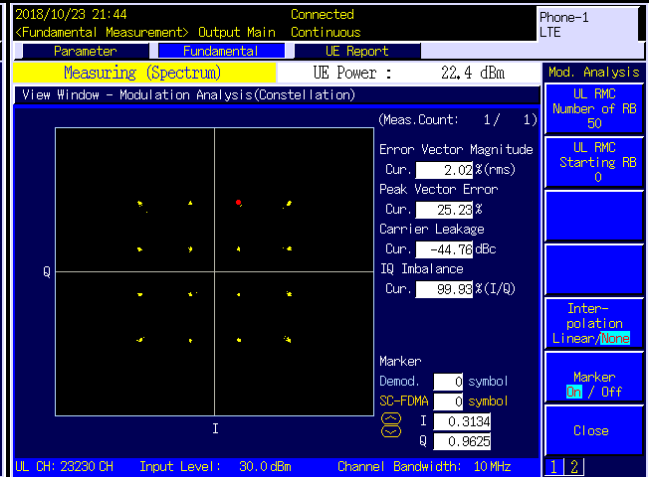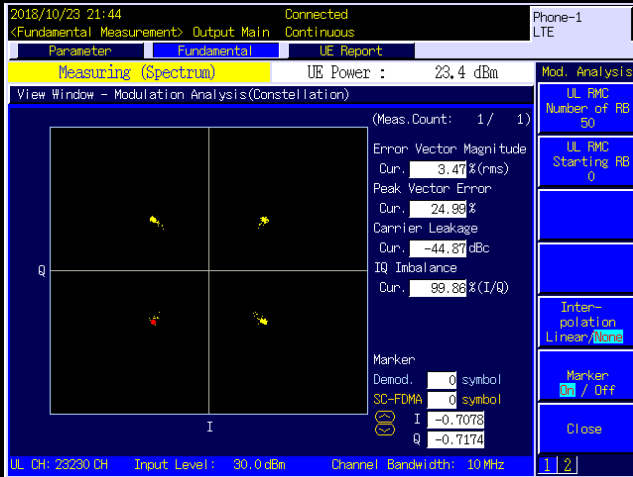

64QAM

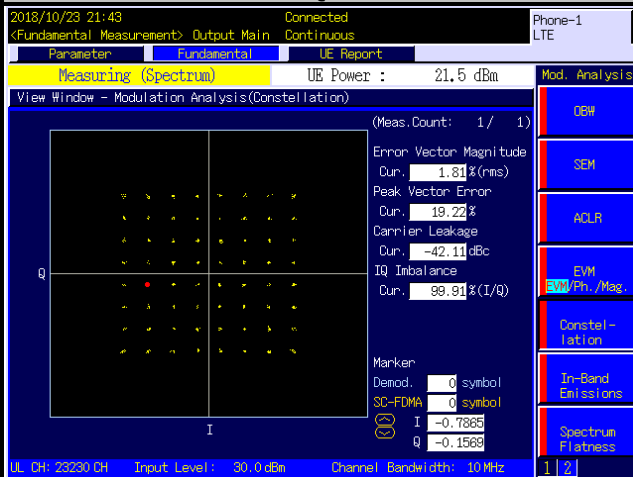



Spectrum Plot of Measurement

LTE Band 17


Channel 23780

QPSK

16QAM

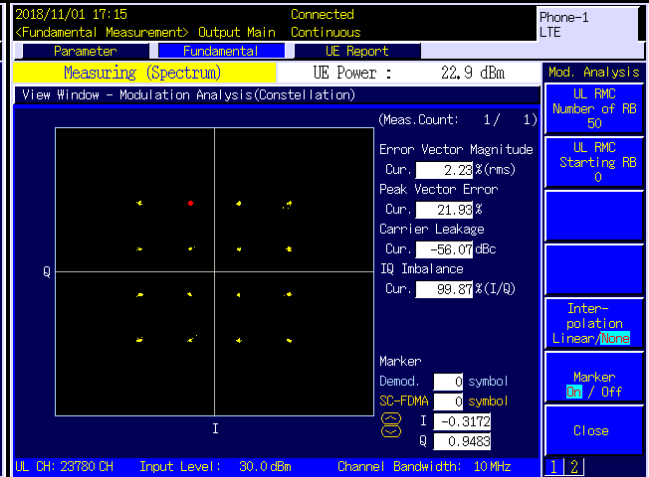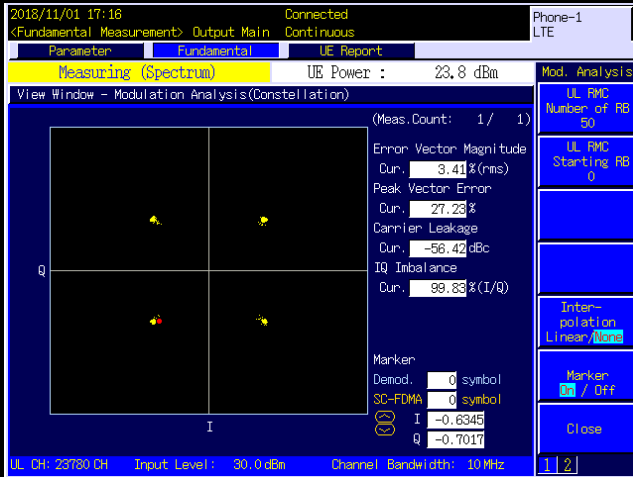

64QAM

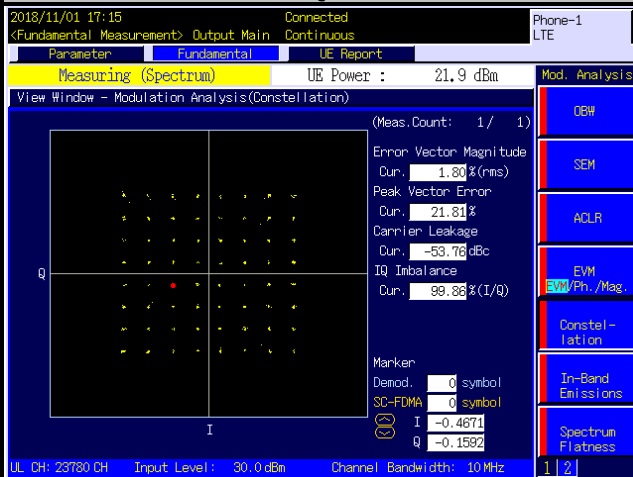



Spectrum Plot of Measurement

LTE Band 66


Channel 132072

QPSK

16QAM

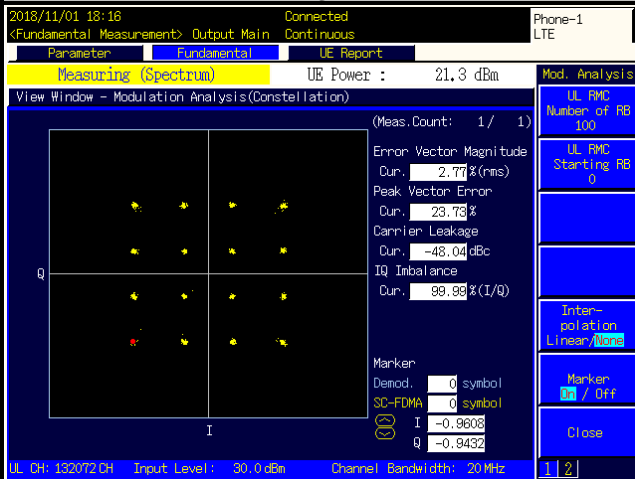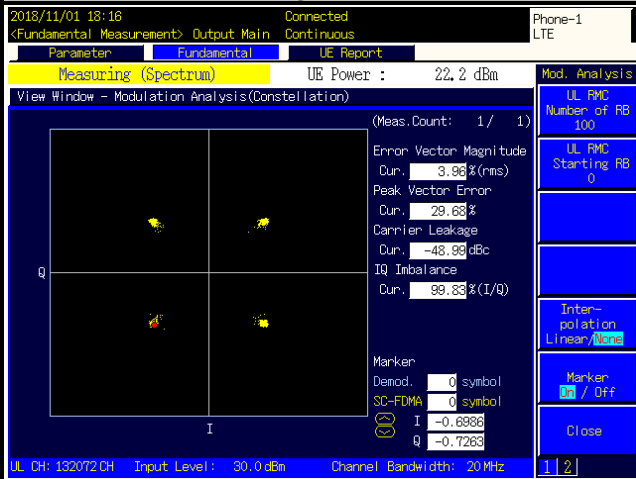

64QAM

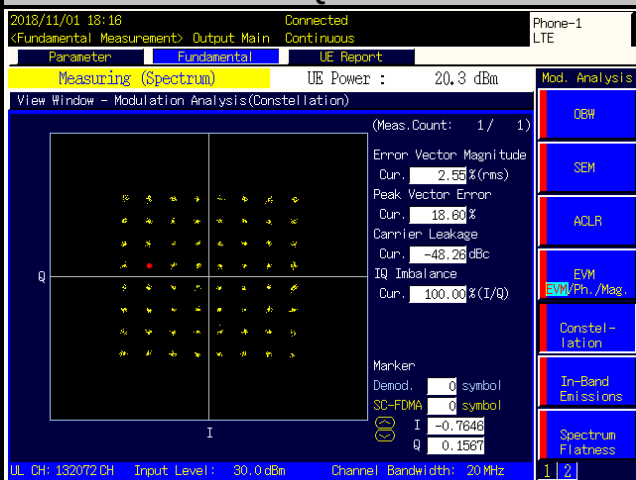

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

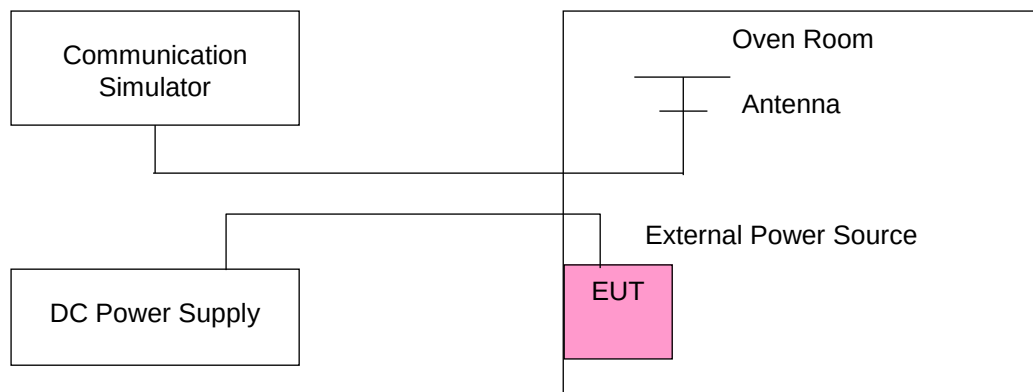

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1712.400003	0.002	1752.600002	0.001
3.6	1712.400003	0.002	1752.600004	0.002
4.4	1712.400002	0.001	1752.600003	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.400001	0.001	1752.600003	0.002
-20	1712.400002	0.001	1752.600003	0.002
-10	1712.400001	0.001	1752.600001	0.001
0	1712.400003	0.001	1752.600004	0.002
10	1712.400002	0.001	1752.600002	0.001
20	1712.399998	-0.001	1752.599998	-0.001
30	1712.399998	-0.001	1752.599997	-0.002
40	1712.399998	-0.001	1752.599997	-0.002
50	1712.399999	-0.001	1752.599997	-0.002
55	1712.399996	-0.002	1752.599998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1710.700002	0.001	1754.300004	0.002
3.6	1710.700002	0.001	1754.300002	0.001
4.4	1710.700002	0.001	1754.300003	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700003	0.002	1754.300003	0.002
-20	1710.700001	0.001	1754.300001	0.001
-10	1710.700001	0.001	1754.300002	0.001
0	1710.700001	0.001	1754.300003	0.002
10	1710.700002	0.001	1754.300002	0.001
20	1710.699996	-0.002	1754.299998	-0.001
30	1710.699997	-0.002	1754.299996	-0.002
40	1710.699999	-0.001	1754.299997	-0.002
50	1710.699996	-0.002	1754.299996	-0.002
55	1710.699996	-0.002	1754.299998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1711.500002	0.001	1753.500002	0.001
3.6	1711.500001	0.001	1753.500004	0.002
4.4	1711.500003	0.002	1753.500001	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500001	0.001	1753.500002	0.001
-20	1711.500004	0.002	1753.500004	0.002
-10	1711.500003	0.002	1753.500002	0.001
0	1711.500002	0.001	1753.500003	0.001
10	1711.500002	0.001	1753.500003	0.002
20	1711.499998	-0.001	1753.499997	-0.002
30	1711.499997	-0.002	1753.499997	-0.002
40	1711.499999	-0.001	1753.499998	-0.001
50	1711.499999	-0.001	1753.499997	-0.002
55	1711.499997	-0.002	1753.499997	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1712.500003	0.001	1752.500004	0.002
3.6	1712.500004	0.002	1752.500004	0.002
4.4	1712.500002	0.001	1752.500004	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500001	0.001	1752.500002	0.001
-20	1712.500002	0.001	1752.500002	0.001
-10	1712.500003	0.002	1752.500001	0.001
0	1712.500003	0.002	1752.500003	0.002
10	1712.500003	0.002	1752.500002	0.001
20	1712.499999	-0.001	1752.499998	-0.001
30	1712.499998	-0.001	1752.499997	-0.002
40	1712.499996	-0.002	1752.499998	-0.001
50	1712.499997	-0.002	1752.499997	-0.002
55	1712.499997	-0.002	1752.499999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1715.000003	0.002	1750.000001	0.001
3.6	1715.000002	0.001	1750.000004	0.002
4.4	1715.000003	0.002	1750.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000004	0.002	1750.000003	0.002
-20	1715.000003	0.002	1750.000001	0.001
-10	1715.000003	0.002	1750.000001	0.001
0	1715.000004	0.002	1750.000003	0.001
10	1715.000002	0.001	1750.000003	0.002
20	1714.999997	-0.002	1749.999997	-0.002
30	1714.999997	-0.002	1749.999999	-0.001
40	1714.999997	-0.002	1749.999997	-0.002
50	1714.999996	-0.002	1749.999997	-0.002
55	1714.999997	-0.002	1749.999996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1717.500001	0.001	1747.500002	0.001
3.6	1717.500001	0.001	1747.500003	0.002
4.4	1717.500003	0.002	1747.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500002	0.001	1747.500004	0.002
-20	1717.500002	0.001	1747.500003	0.002
-10	1717.500001	0.001	1747.500002	0.001
0	1717.500003	0.002	1747.500004	0.002
10	1717.500003	0.002	1747.500004	0.002
20	1717.499997	-0.002	1747.499998	-0.001
30	1717.499998	-0.001	1747.499998	-0.001
40	1717.499998	-0.001	1747.499998	-0.001
50	1717.499998	-0.001	1747.499999	-0.001
55	1717.499996	-0.002	1747.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1720.000002	0.001	1745.000003	0.002
3.6	1720.000002	0.001	1745.000004	0.002
4.4	1720.000004	0.002	1745.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000004	0.002	1745.000003	0.001
-20	1720.000003	0.002	1745.000003	0.002
-10	1720.000003	0.002	1745.000003	0.002
0	1720.000002	0.001	1745.000002	0.001
10	1720.000003	0.002	1745.000002	0.001
20	1719.999997	-0.002	1744.999998	-0.001
30	1719.999998	-0.001	1744.999998	-0.001
40	1719.999996	-0.002	1744.999996	-0.002
50	1719.999998	-0.001	1744.999997	-0.002
55	1719.999997	-0.002	1744.999996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	699.700001	0.002	715.300002	0.002
3.6	699.700002	0.003	715.300004	0.005
4.4	699.700004	0.005	715.300003	0.005

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	699.700003	0.005	715.300002	0.002
-20	699.700002	0.002	715.300004	0.005
-10	699.700001	0.002	715.300004	0.006
0	699.700002	0.002	715.300001	0.002
10	699.700004	0.005	715.300002	0.002
20	699.699998	-0.003	715.299999	-0.002
30	699.699996	-0.005	715.299998	-0.003
40	699.699996	-0.005	715.299998	-0.003
50	699.699999	-0.002	715.299999	-0.002
55	699.699998	-0.003	715.299999	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	700.500002	0.003	714.500003	0.005
3.6	700.500003	0.004	714.500003	0.004
4.4	700.500003	0.004	714.500004	0.005

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	700.500004	0.005	714.500001	0.001
-20	700.500003	0.004	714.500002	0.003
-10	700.500003	0.004	714.500002	0.002
0	700.500004	0.005	714.500002	0.003
10	700.500002	0.002	714.500004	0.005
20	700.499997	-0.005	714.499999	-0.002
30	700.499997	-0.004	714.499998	-0.003
40	700.499997	-0.005	714.499997	-0.004
50	700.499996	-0.005	714.499998	-0.002
55	700.499996	-0.005	714.499998	-0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	701.500004	0.006	713.500002	0.003
3.6	701.500004	0.005	713.500001	0.002
4.4	701.500002	0.003	713.500002	0.003

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	701.500001	0.002	713.500004	0.005
-20	701.500001	0.001	713.500002	0.003
-10	701.500004	0.005	713.500001	0.002
0	701.500004	0.005	713.500001	0.001
10	701.500004	0.005	713.500003	0.004
20	701.499997	-0.004	713.499996	-0.005
30	701.499996	-0.005	713.499997	-0.005
40	701.499996	-0.006	713.499998	-0.003
50	701.499997	-0.004	713.499997	-0.004
55	701.499998	-0.003	713.499998	-0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	704.000002	0.002	711.000003	0.005
3.6	704.000002	0.003	711.000003	0.004
4.4	704.000002	0.003	711.000002	0.003

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 12			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	704.000002	0.003	711.000004	0.005
-20	704.000001	0.002	711.000003	0.004
-10	704.000004	0.005	711.000004	0.006
0	704.000002	0.003	711.000004	0.005
10	704.000003	0.005	711.000004	0.005
20	703.999998	-0.003	710.999998	-0.003
30	703.999997	-0.004	710.999998	-0.003
40	703.999997	-0.004	710.999997	-0.005
50	703.999996	-0.005	710.999999	-0.002
55	703.999997	-0.004	710.999998	-0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	779.500002	0.002	784.500003	0.004
3.6	779.500002	0.002	784.500002	0.003
4.4	779.500001	0.002	784.500001	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	779.500003	0.004	784.500003	0.004
-20	779.500001	0.001	784.500002	0.002
-10	779.500004	0.005	784.500002	0.003
0	779.500004	0.005	784.500002	0.003
10	779.500003	0.004	784.500001	0.001
20	779.499996	-0.005	784.499998	-0.003
30	779.499998	-0.003	784.499999	-0.002
40	779.499996	-0.005	784.499998	-0.002
50	779.499996	-0.005	784.499997	-0.004
55	779.499999	-0.001	784.499999	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
3.85	782.000002	0.002
3.6	782.000003	0.003
4.4	782.000003	0.004

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13	
	Channel Bandwidth: 10 MHz	
	Frequency (MHz)	Frequency Error (ppm)
-30	782.000003	0.003
-20	782.000002	0.003
-10	782.000004	0.005
0	782.000002	0.003
10	782.000003	0.003
20	781.999997	-0.004
30	781.999998	-0.003
40	781.999999	-0.001
50	781.999998	-0.002
55	781.999998	-0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	706.500003	0.004	713.500002	0.003
3.6	706.500003	0.004	713.500001	0.002
4.4	706.500003	0.004	713.500003	0.004

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	706.500004	0.005	713.500003	0.004
-20	706.500003	0.004	713.500002	0.003
-10	706.500003	0.004	713.500004	0.005
0	706.500001	0.002	713.500003	0.004
10	706.500003	0.004	713.500003	0.005
20	706.499998	-0.003	713.499997	-0.004
30	706.499998	-0.003	713.499998	-0.003
40	706.499998	-0.003	713.499999	-0.002
50	706.499997	-0.004	713.499999	-0.002
55	706.499996	-0.005	713.499996	-0.005

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	709.000003	0.004	711.000001	0.001
3.6	709.000004	0.005	711.000002	0.003
4.4	709.000003	0.005	711.000001	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	709.000002	0.003	711.000003	0.004
-20	709.000003	0.004	711.000002	0.002
-10	709.000003	0.004	711.000003	0.004
0	709.000004	0.005	711.000002	0.003
10	709.000002	0.002	711.000001	0.002
20	708.999999	-0.002	710.999997	-0.005
30	708.999998	-0.003	710.999997	-0.005
40	708.999997	-0.004	710.999997	-0.004
50	708.999998	-0.003	710.999999	-0.002
55	708.999997	-0.004	710.999998	-0.003

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1710.700002	0.001	1779.300003	0.002
3.6	1710.700001	0.001	1779.300003	0.002
4.4	1710.700003	0.002	1779.300002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 1.4 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1710.700002	0.001	1779.300002	0.001
-20	1710.700002	0.001	1779.300004	0.002
-10	1710.700001	0.001	1779.300002	0.001
0	1710.700004	0.002	1779.300001	0.001
10	1710.700002	0.001	1779.300002	0.001
20	1710.699997	-0.002	1779.299998	-0.001
30	1710.699996	-0.002	1779.299996	-0.002
40	1710.699997	-0.002	1779.299996	-0.002
50	1710.699996	-0.002	1779.299996	-0.002
55	1710.699999	-0.001	1779.299999	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1711.500004	0.002	1778.500004	0.002
3.6	1711.500002	0.001	1778.500003	0.002
4.4	1711.500001	0.001	1778.500001	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 3 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1711.500004	0.002	1778.500002	0.001
-20	1711.500002	0.001	1778.500003	0.002
-10	1711.500002	0.001	1778.500001	0.001
0	1711.500003	0.002	1778.500002	0.001
10	1711.500002	0.001	1778.500003	0.002
20	1711.499996	-0.002	1778.499998	-0.001
30	1711.499998	-0.001	1778.499998	-0.001
40	1711.499996	-0.002	1778.499998	-0.001
50	1711.499998	-0.001	1778.499996	-0.002
55	1711.499996	-0.002	1778.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1712.500003	0.001	1777.500001	0.001
3.6	1712.500004	0.002	1777.500002	0.001
4.4	1712.500004	0.002	1777.500002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 5 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1712.500002	0.001	1777.500003	0.002
-20	1712.500002	0.001	1777.500003	0.002
-10	1712.500003	0.002	1777.500003	0.001
0	1712.500004	0.002	1777.500004	0.002
10	1712.500001	0.001	1777.500003	0.002
20	1712.499996	-0.002	1777.499998	-0.001
30	1712.499997	-0.002	1777.499999	-0.001
40	1712.499996	-0.002	1777.499999	-0.001
50	1712.499997	-0.002	1777.499999	-0.001
55	1712.499999	-0.001	1777.499998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1715.000003	0.002	1775.000001	0.001
3.6	1715.000003	0.002	1775.000002	0.001
4.4	1715.000004	0.002	1775.000002	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 10 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1715.000002	0.001	1775.000001	0.001
-20	1715.000003	0.002	1775.000004	0.002
-10	1715.000003	0.002	1775.000004	0.002
0	1715.000003	0.002	1775.000004	0.002
10	1715.000003	0.002	1775.000004	0.002
20	1714.999998	-0.001	1774.999996	-0.002
30	1714.999997	-0.002	1774.999996	-0.002
40	1714.999997	-0.002	1774.999997	-0.002
50	1714.999998	-0.001	1774.999998	-0.001
55	1714.999996	-0.002	1774.999998	-0.001

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1717.500003	0.002	1772.500003	0.002
3.6	1717.500001	0.001	1772.500003	0.001
4.4	1717.500001	0.001	1772.500003	0.002

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 15 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1717.500004	0.002	1772.500001	0.001
-20	1717.500003	0.001	1772.500004	0.002
-10	1717.500002	0.001	1772.500002	0.001
0	1717.500002	0.001	1772.500003	0.002
10	1717.500001	0.001	1772.500003	0.001
20	1717.499996	-0.002	1772.499999	-0.001
30	1717.499996	-0.002	1772.499996	-0.002
40	1717.499997	-0.002	1772.499996	-0.002
50	1717.499998	-0.001	1772.499996	-0.002
55	1717.499997	-0.002	1772.499996	-0.002

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 66			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
3.85	1720.000002	0.001	1770.000002	0.001
3.6	1720.000003	0.002	1770.000002	0.001
4.4	1720.000001	0.001	1770.000001	0.001

Note: The applicant defined the normal working voltage of the battery is from 3.6 Vdc to 4.4 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 66			
	Channel Bandwidth: 20 MHz			
	Low Channel		High Channel	
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)
-30	1720.000003	0.002	1770.000001	0.001
-20	1720.000004	0.002	1770.000003	0.002
-10	1720.000003	0.002	1770.000004	0.002
0	1720.000003	0.002	1770.000002	0.001
10	1720.000002	0.001	1770.000004	0.002
20	1719.999996	-0.002	1769.999998	-0.001
30	1719.999999	-0.001	1769.999999	-0.001
40	1719.999998	-0.001	1769.999998	-0.001
50	1719.999997	-0.002	1769.999999	-0.001
55	1719.999998	-0.001	1769.999998	-0.001

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.


4.4.3 Test Setup

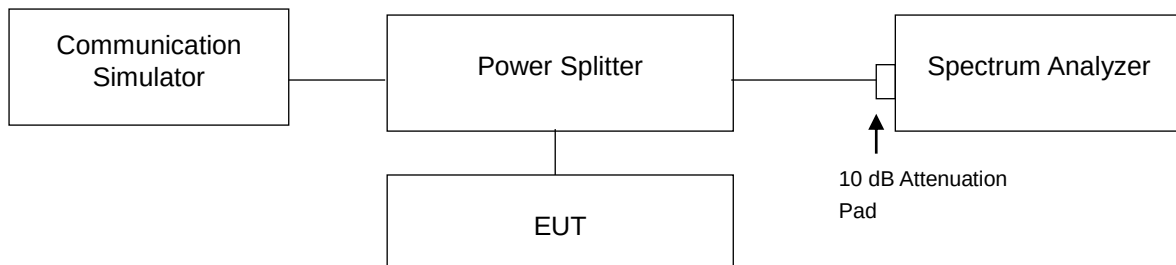

4.4.4 Test Result

<99 % Occupied Bandwidth>


WCDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
1312	1712.4	4.1507
1413	1732.6	4.1529
1513	1752.6	4.1532

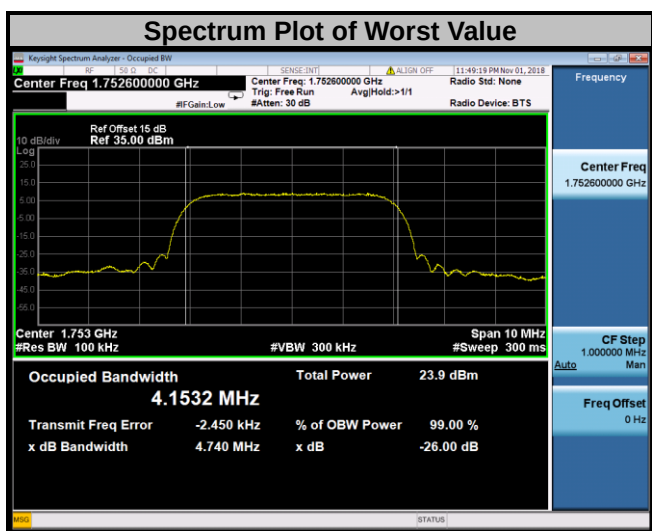

LTE Band 4

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19957	1710.7	1.0864	1.0890	1.0881	19965	1711.5	2.7034	2.6962	2.6966
20175	1732.5	1.0846	1.0890	1.0887	20175	1732.5	2.7004	2.6972	2.6970
20393	1754.3	1.0845	1.0892	1.0882	20385	1753.5	2.6995	2.6969	2.6974

Spectrum Plot of Worst Value

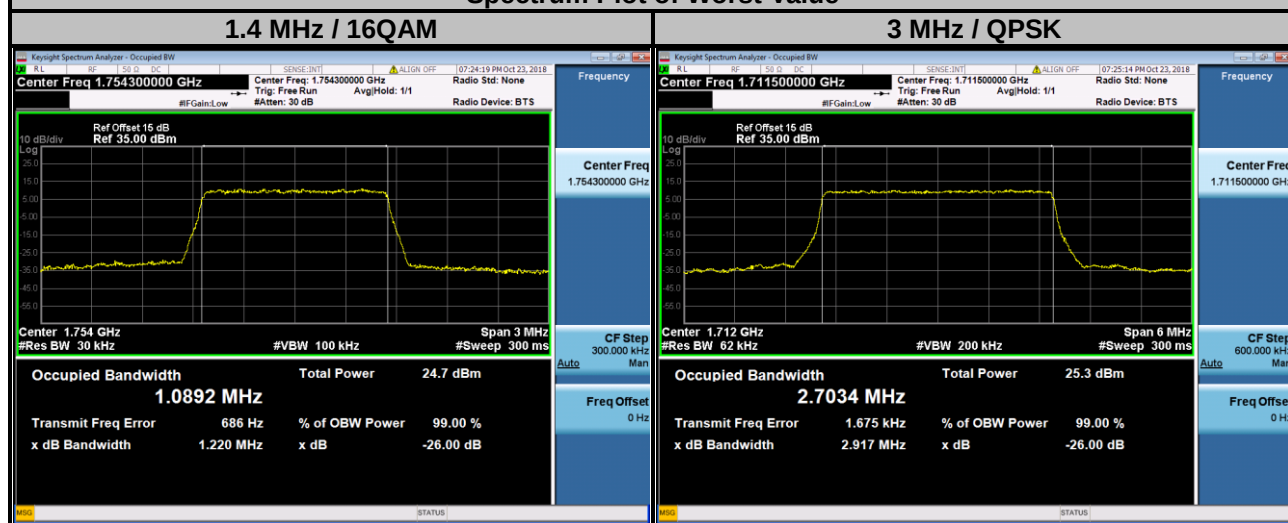

LTE Band 4

Channel Bandwidth: 5 MHz


Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19975	1712.5	4.4929	4.4894	4.5023	20000	1715.0	8.9726	8.9770	8.9798
20175	1732.5	4.4900	4.4913	4.5010	20175	1732.5	8.9675	8.9735	8.9776
20375	1752.5	4.4916	4.4937	4.5008	20350	1750.0	8.9695	8.9731	8.9748


Spectrum Plot of Worst Value

5 MHz / 64QAM

10 MHz / 64QAM

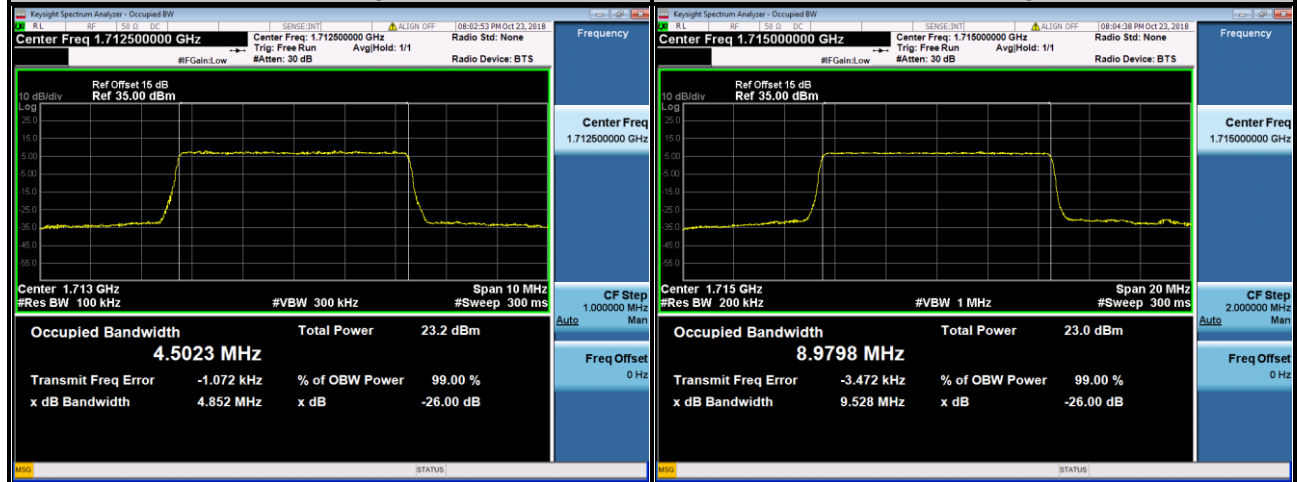


LTE Band 4									
Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20025	1717.5	13.464	13.455	13.450	20050	1720.0	17.948	17.962	17.962
20175	1732.5	13.447	13.441	13.439	20175	1732.5	17.917	17.939	17.936
20325	1747.5	13.458	13.455	13.445	20300	1745.0	17.927	17.949	17.942

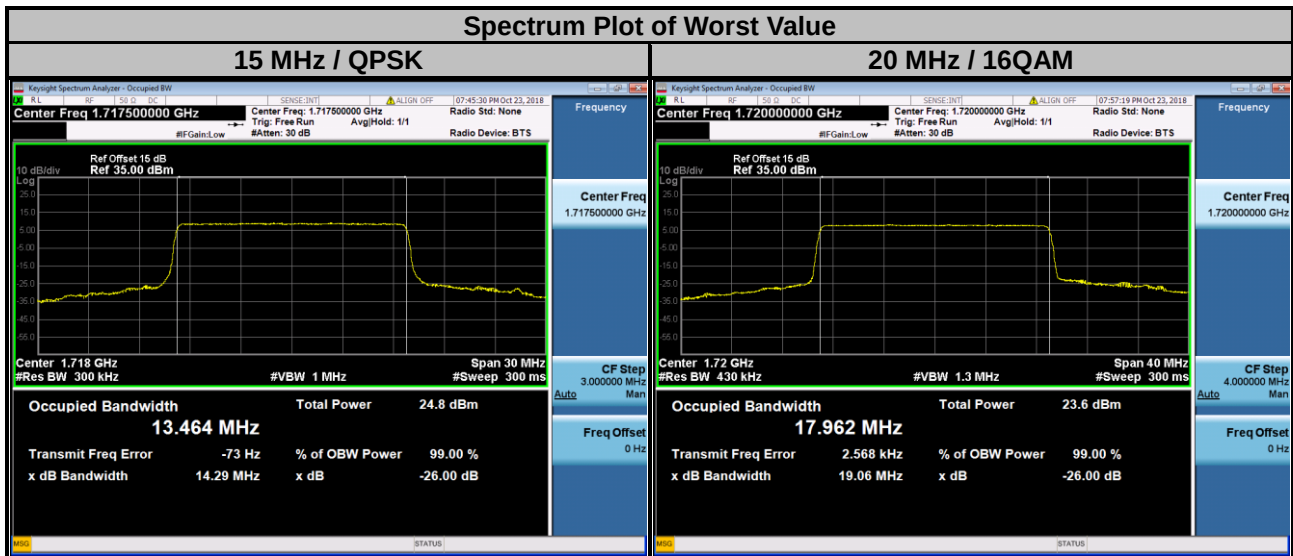

LTE Band 12

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23017	699.7	1.0868	1.0878	1.0885	23025	700.5	2.7023	2.6967	2.6969
23095	707.5	1.0877	1.0898	1.0883	23095	707.5	2.7019	2.6986	2.6969
23173	715.3	1.0859	1.0858	1.0865	23165	714.5	2.7006	2.6974	2.6976


Spectrum Plot of Worst Value

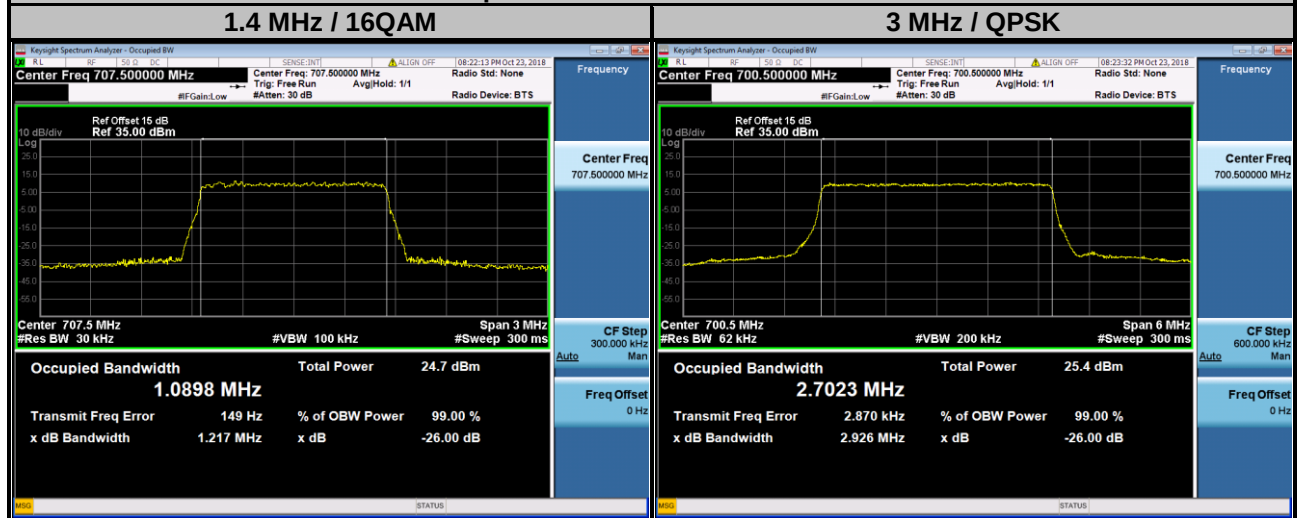

LTE Band 12

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23035	701.5	4.4900	4.4934	4.4982	23060	704.0	8.9668	8.9692	8.9716
23095	707.5	4.4922	4.4958	4.5054	23095	707.5	8.9763	8.9833	8.9817
23155	713.5	4.4860	4.4888	4.4973	23130	711.0	8.9578	8.9626	8.9666


Spectrum Plot of Worst Value

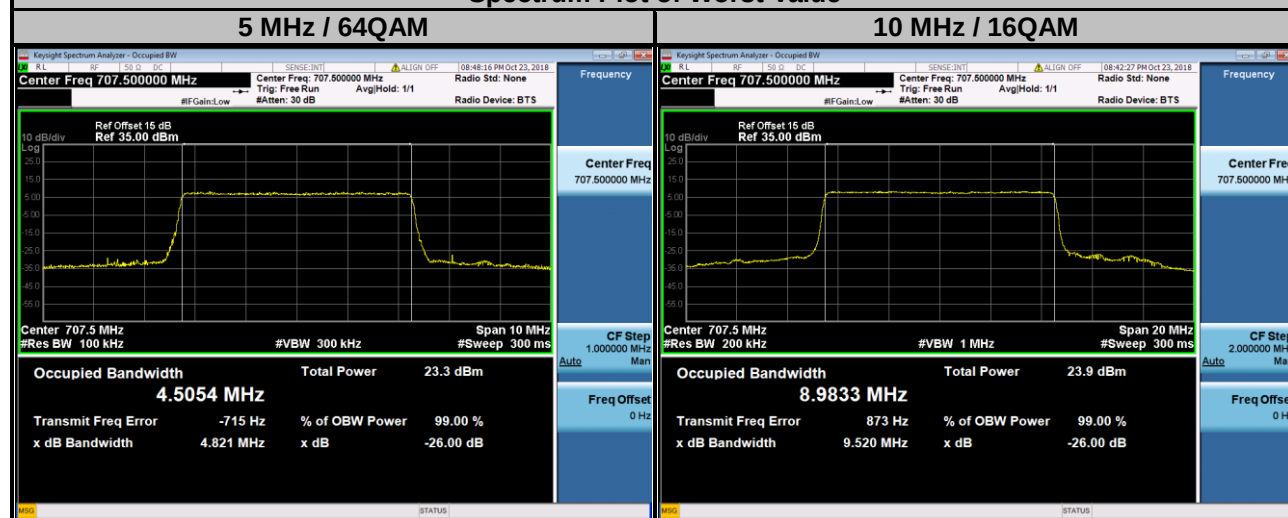

LTE Band 13

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23205	779.5	4.4910	4.4953	4.5031	23230	782.0	8.9583	8.9566	8.9634
23230	782.0	4.4853	4.4872	4.4966					
23255	784.5	4.4933	4.4935	4.5036					

Spectrum Plot of Worst Value

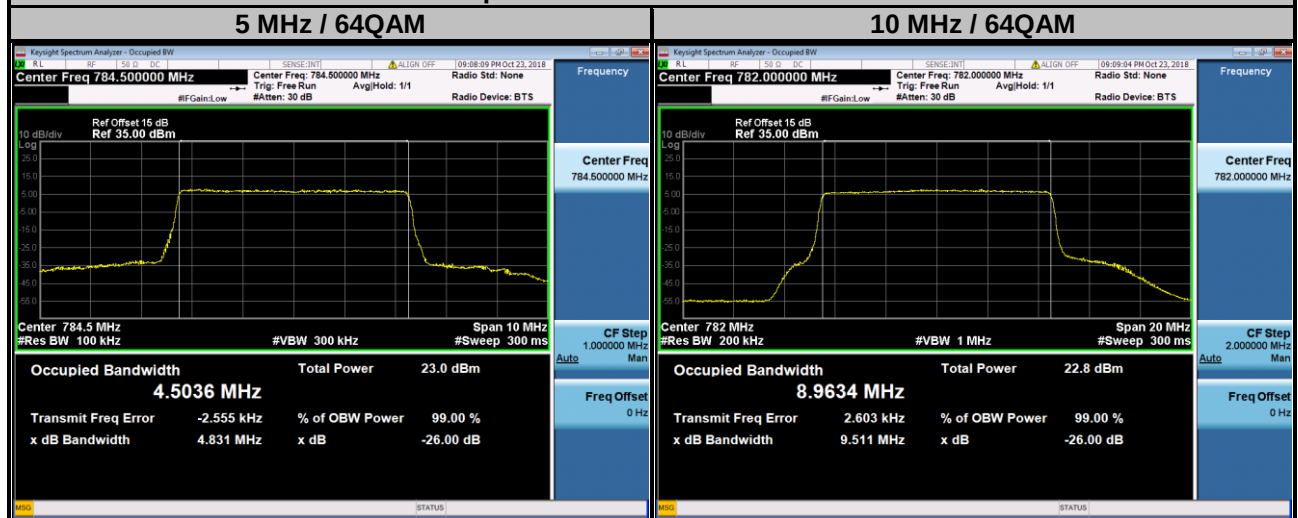

LTE Band 17


Channel Bandwidth: 5 MHz

Channel Bandwidth: 10 MHz

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23755	706.5	4.4902	4.4927	4.5014	23780	709.0	8.9685	8.9731	8.9795
23790	710.0	4.4923	4.4944	4.5025	23790	710.0	8.9686	8.9731	8.9731
23825	713.5	4.4871	4.4898	4.4956	23800	711.0	8.9623	8.9643	8.9711

Spectrum Plot of Worst Value

5 MHz / 64QAM

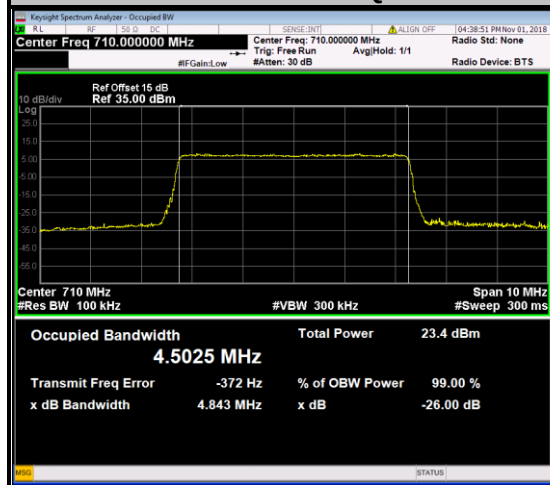

10 MHz / 64QAM



LTE Band 66


Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 3 MHz


Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
131979	1710.7	1.0866	1.0893	1.0880	131987	1711.5	2.7015	2.6977	2.6981
132322	1745.0	1.0858	1.0877	1.0867	132322	1745.0	2.6999	2.6974	2.6976
132665	1779.3	1.0865	1.0869	1.0900	132657	1778.5	2.7014	2.6981	2.6984

Spectrum Plot of Worst Value

1.4 MHz / 64QAM

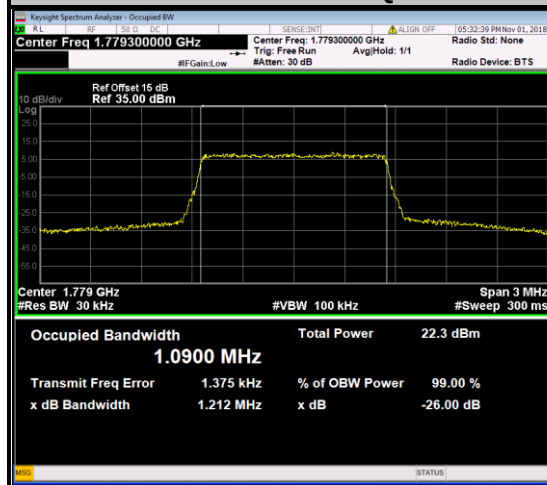


3 MHz / QPSK

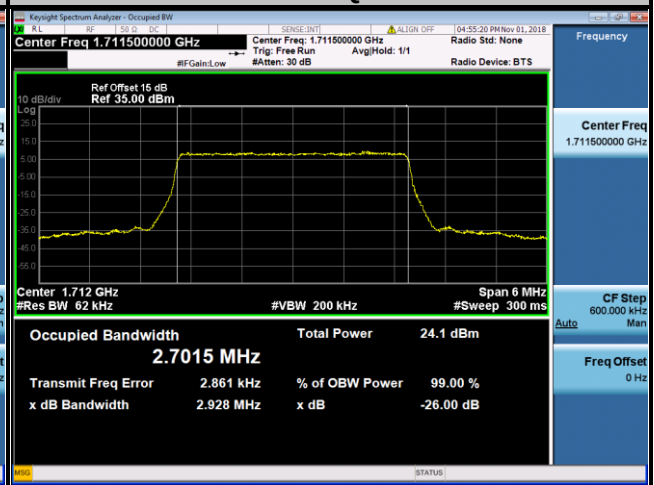

LTE Band 66

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
131997	1712.5	4.4894	4.4925	4.4985	132022	1715.0	8.9722	8.9731	8.9750
132322	1745.0	4.4899	4.4931	4.5026	132322	1745.0	8.9678	8.9720	8.9725
132647	1777.5	4.4921	4.4947	4.5031	132622	1775.0	8.9694	8.9697	8.9752

Spectrum Plot of Worst Value

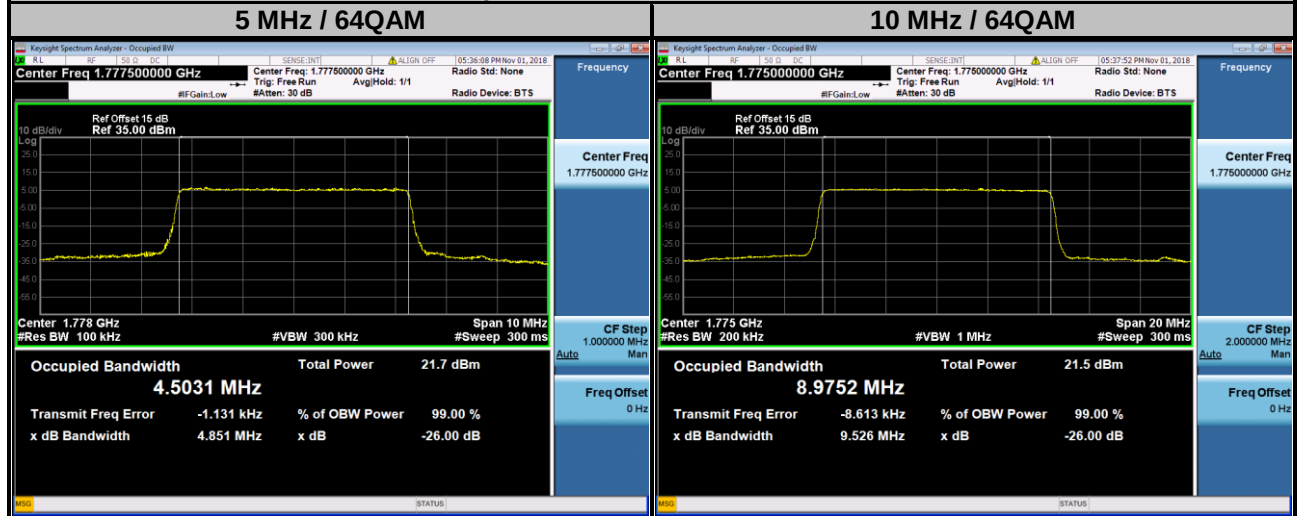

LTE Band 66


Channel Bandwidth: 15 MHz

Channel Bandwidth: 20 MHz


Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)			Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
132047	1717.5	13.465	13.449	13.446	132072	1720.0	17.949	17.967	17.957
132322	1745.0	13.454	13.444	13.439	132322	1745.0	17.919	17.937	17.942
132597	1772.5	13.457	13.441	13.438	132572	1770.0	17.917	17.938	17.934

Spectrum Plot of Worst Value

15 MHz / QPSK

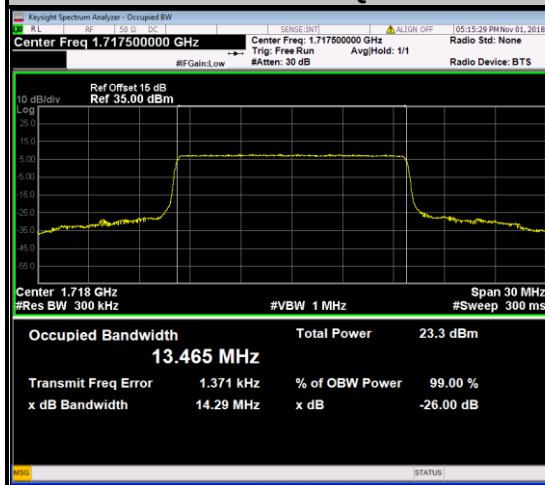


20 MHz / 16QAM

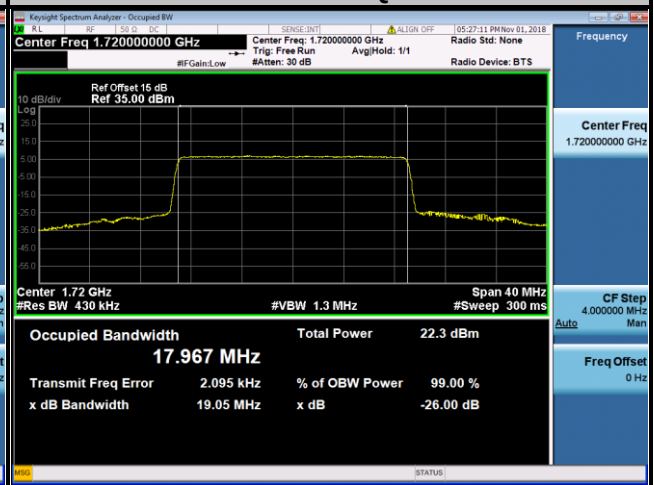

<26 dB Bandwidth>


WCDMA		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
1312	1712.4	4.733
1413	1732.6	4.731
1513	1752.6	4.740

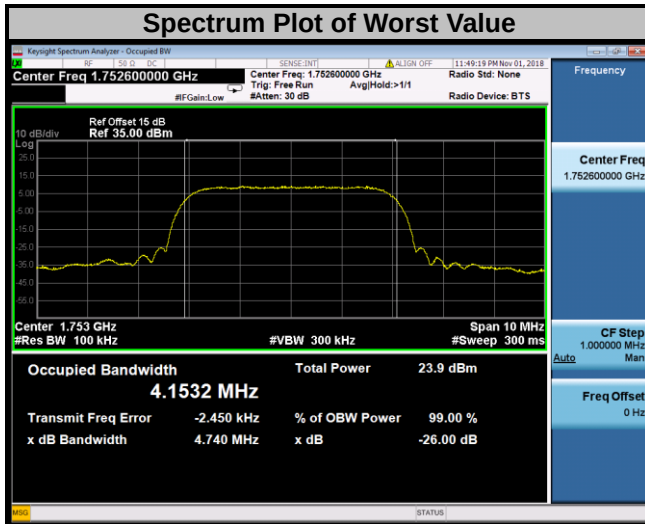

LTE Band 4

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19957	1710.7	1.218	1.217	1.214	19965	1711.5	2.917	2.923	2.905
20175	1732.5	1.210	1.213	1.215	20175	1732.5	2.926	2.922	2.902
20393	1754.3	1.214	1.220	1.216	20385	1753.5	2.926	2.924	2.908


Spectrum Plot of Worst Value

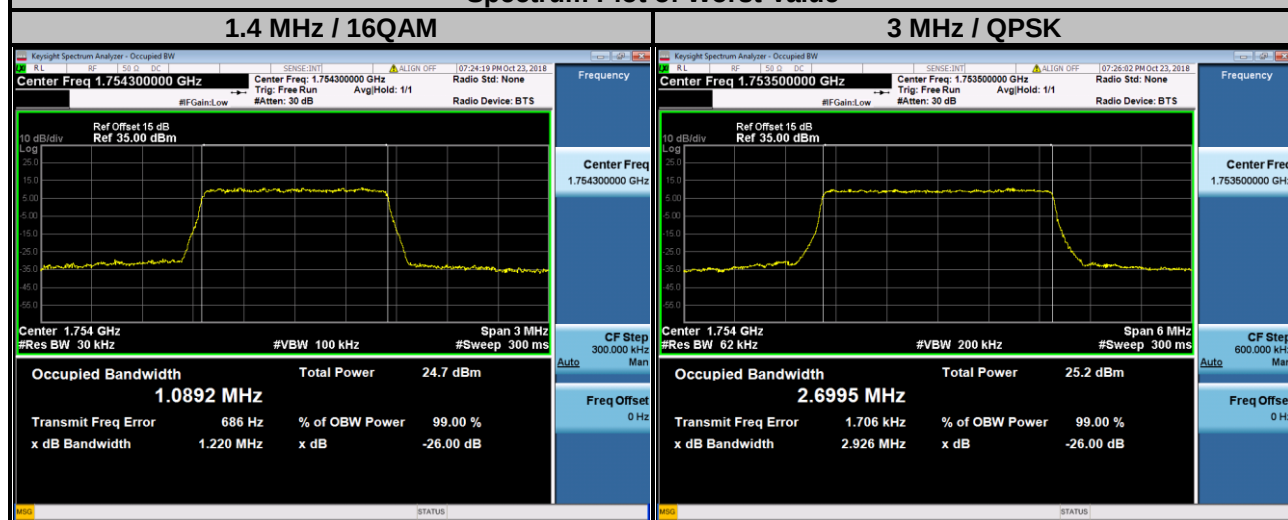

LTE Band 4

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
19975	1712.5	4.807	4.810	4.852	20000	1715.0	9.552	9.506	9.528
20175	1732.5	4.830	4.811	4.844	20175	1732.5	9.524	9.522	9.526
20375	1752.5	4.815	4.810	4.838	20350	1750.0	9.532	9.518	9.532


Spectrum Plot of Worst Value

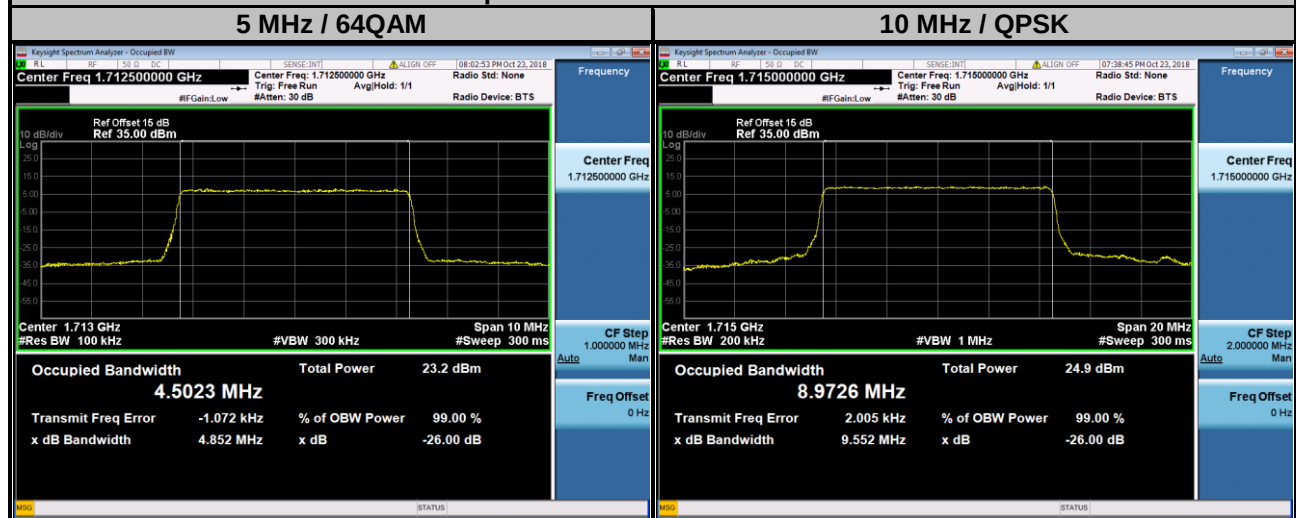

LTE Band 4

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
20025	1717.5	14.29	14.28	14.25	20050	1720.0	19.11	19.06	19.05
20175	1732.5	14.27	14.25	14.26	20175	1732.5	19.07	19.04	19.04
20325	1747.5	14.29	14.26	14.26	20300	1745.0	19.08	19.03	19.04

Spectrum Plot of Worst Value

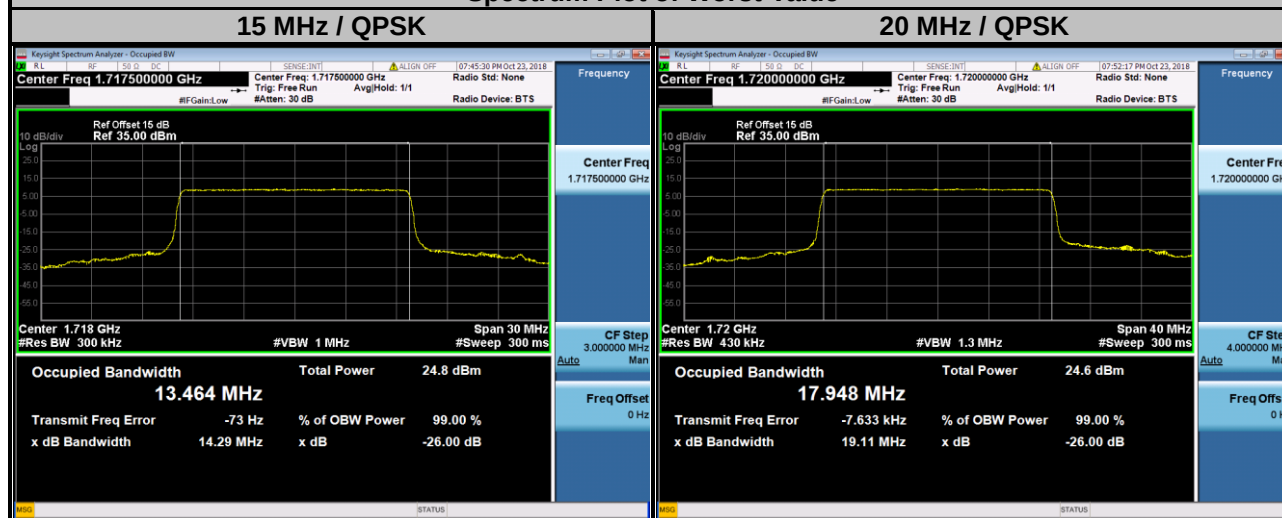

LTE Band 12

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23017	699.7	1.218	1.209	1.212	23025	700.5	2.926	2.931	2.905
23095	707.5	1.218	1.217	1.214	23095	707.5	2.943	2.930	2.911
23173	715.3	1.214	1.214	1.218	23165	714.5	2.949	2.925	2.897


Spectrum Plot of Worst Value




LTE Band 12

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23035	701.5	4.826	4.805	4.829	23060	704.0	9.518	9.522	9.521
23095	707.5	4.851	4.817	4.821	23095	707.5	9.548	9.520	9.536
23155	713.5	4.808	4.793	4.835	23130	711.0	9.540	9.510	9.531

Spectrum Plot of Worst Value

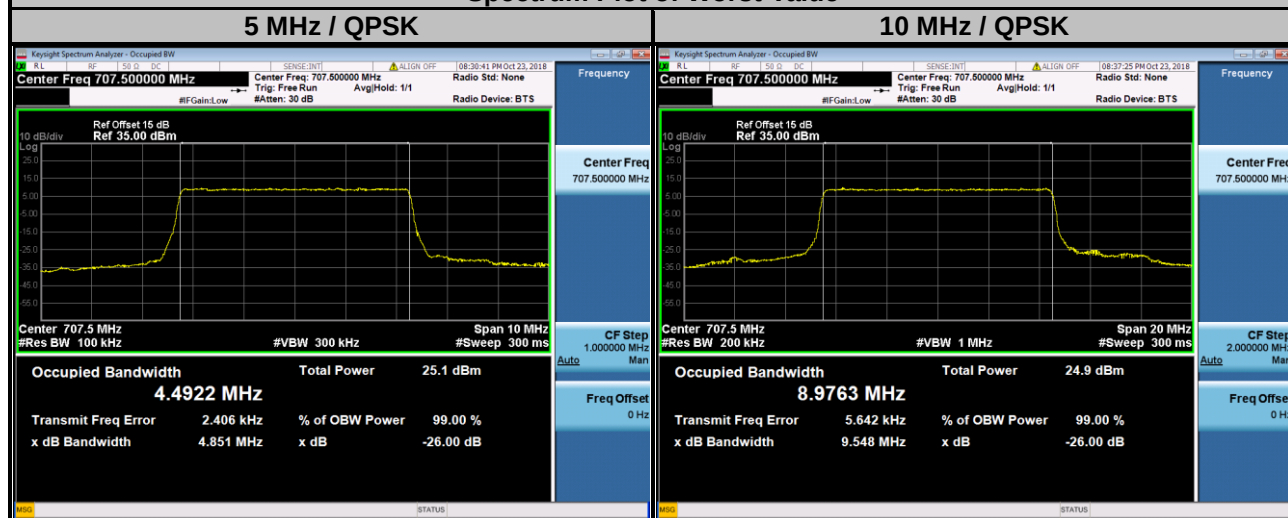


LTE Band 13									
Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23205	779.5	4.843	4.800	4.836	23230	782.0	9.529	9.514	9.511
23230	782.0	4.812	4.802	4.837					
23255	784.5	4.848	4.813	4.831					

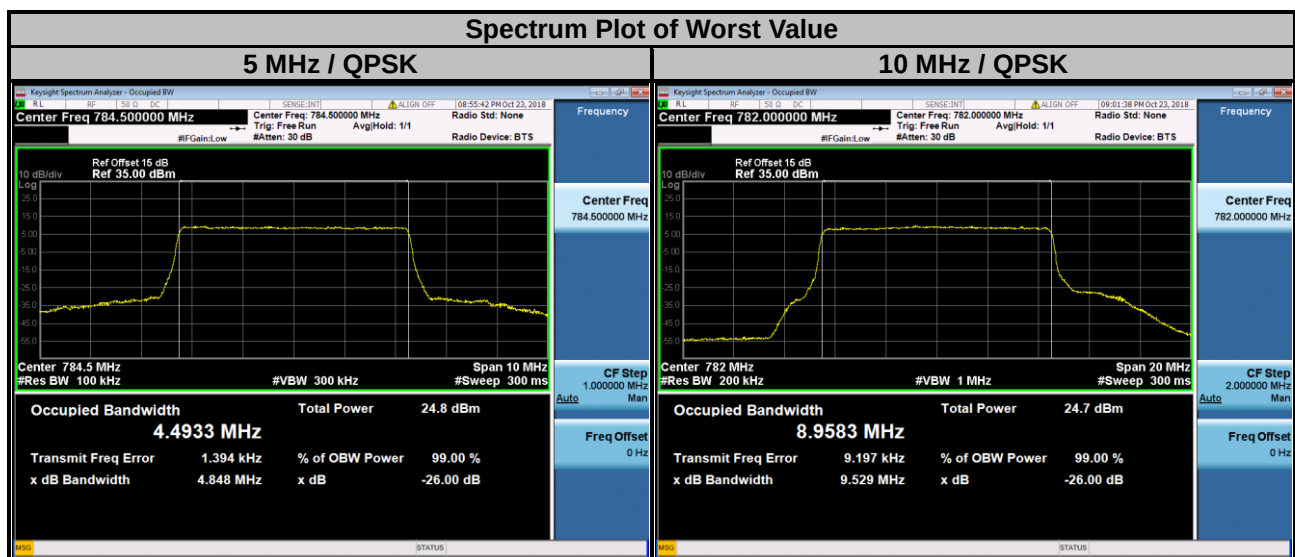

LTE Band 17

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
23755	706.5	4.827	4.806	4.842	23780	709.0	9.542	9.517	9.513
23790	710.0	4.832	4.806	4.843	23790	710.0	9.534	9.518	9.530
23825	713.5	4.816	4.801	4.809	23800	711.0	9.530	9.518	9.523


Spectrum Plot of Worst Value

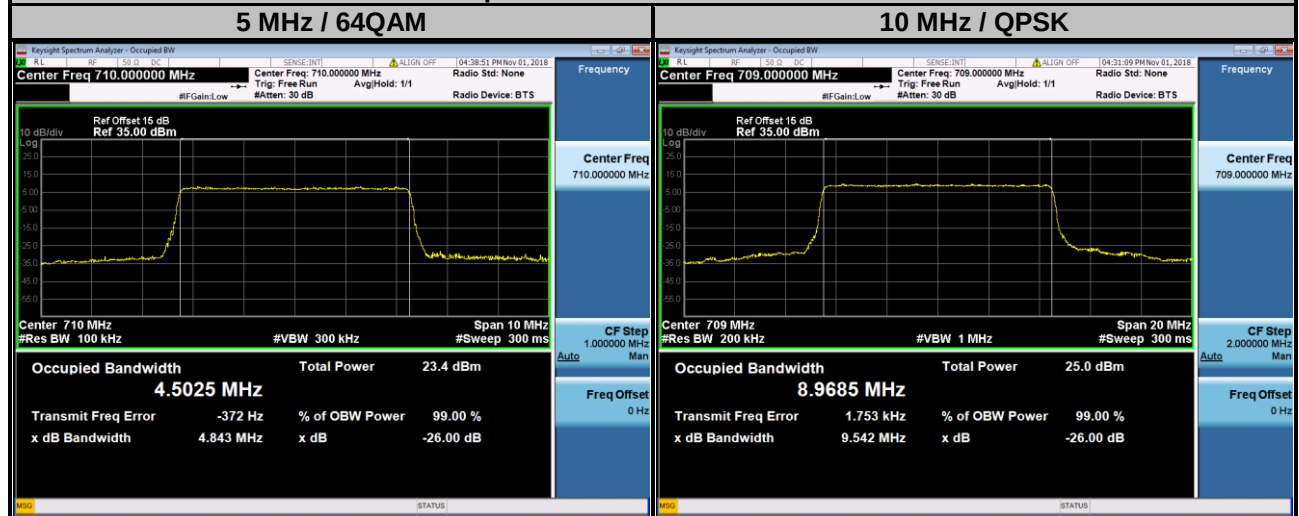

LTE Band 66

Channel Bandwidth: 1.4 MHz					Channel Bandwidth: 3 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
131979	1710.7	1.223	1.218	1.210	131987	1711.5	2.928	2.917	2.913
132322	1745.0	1.220	1.216	1.217	132322	1745.0	2.927	2.921	2.905
132665	1779.3	1.218	1.215	1.212	132657	1778.5	2.929	2.927	2.912


Spectrum Plot of Worst Value

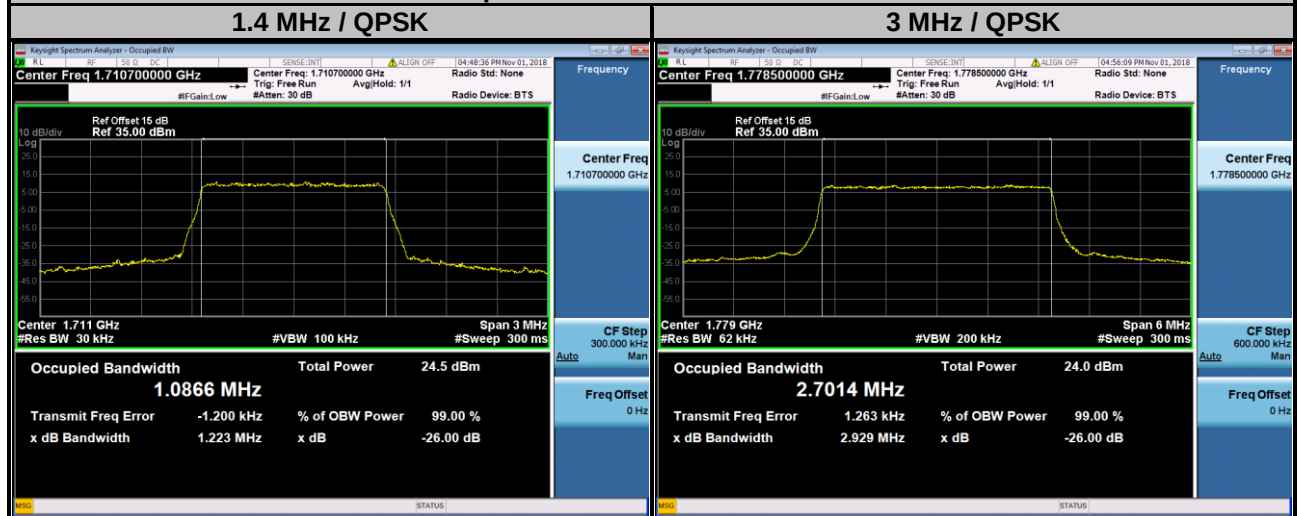

LTE Band 66

Channel Bandwidth: 5 MHz					Channel Bandwidth: 10 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
131997	1712.5	4.813	4.804	4.831	132022	1715.0	9.530	9.525	9.530
132322	1745.0	4.822	4.814	4.829	132322	1745.0	9.529	9.518	9.534
132647	1777.5	4.842	4.812	4.851	132622	1775.0	9.529	9.521	9.526


Spectrum Plot of Worst Value

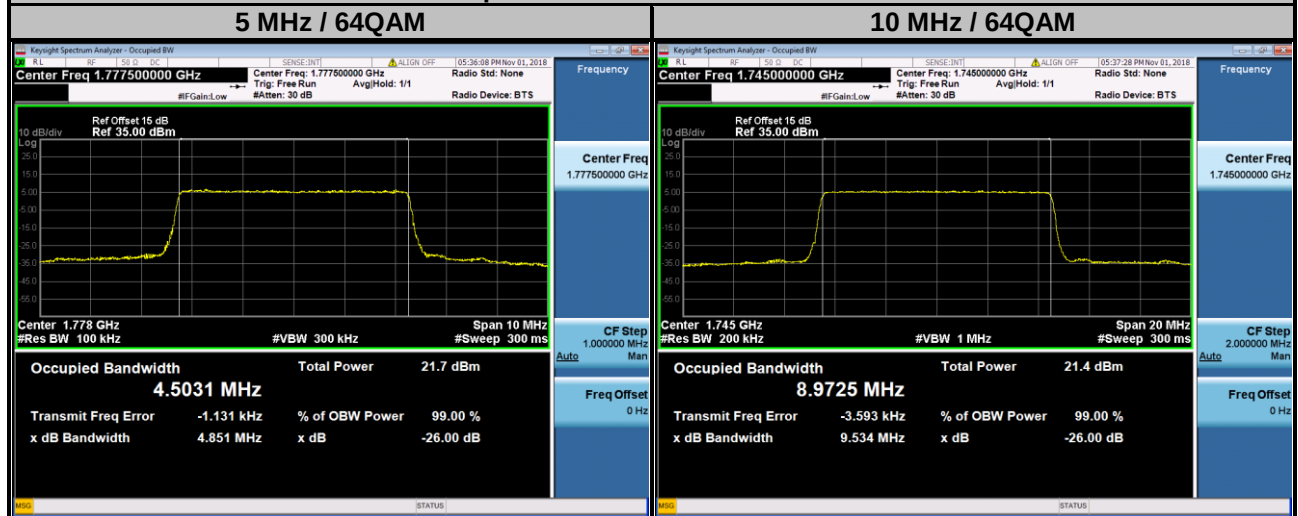

LTE Band 66

Channel Bandwidth: 15 MHz					Channel Bandwidth: 20 MHz				
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)			Channel	Frequency (MHz)	26 dB Bandwidth (MHz)		
		QPSK	16QAM	64QAM			QPSK	16QAM	64QAM
132047	1717.5	14.29	14.25	14.26	132072	1720.0	19.10	19.05	19.05
132322	1745.0	14.26	14.24	14.24	132322	1745.0	19.06	19.03	19.03
132597	1772.5	14.30	14.23	14.24	132572	1770.0	19.08	19.05	19.05

Spectrum Plot of Worst Value

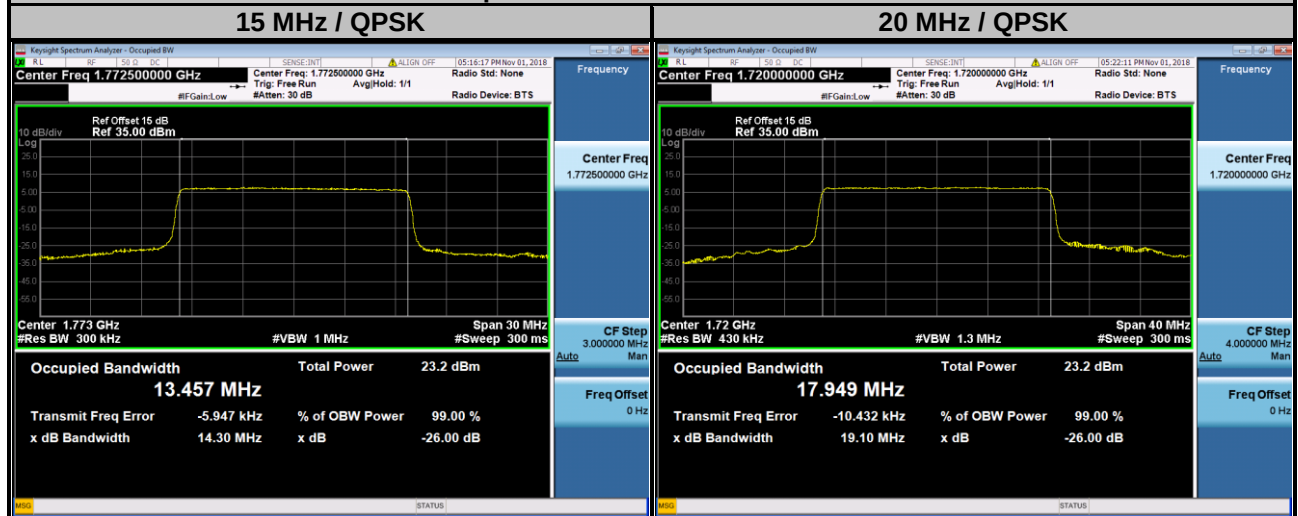

4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

For operations in the 698-787 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.


However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

On all frequencies between 763-775 MHz and 793-805 MHz, by a factor no less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.



4.5.2 Test Setup

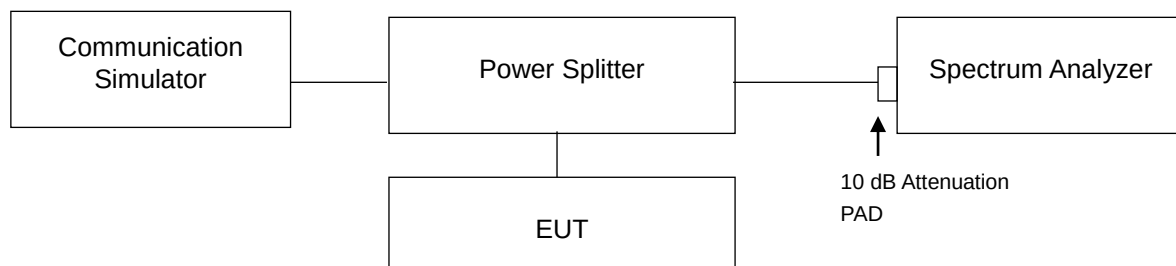



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 15 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max. trace plot into the test report.


4.5.4 Test Results

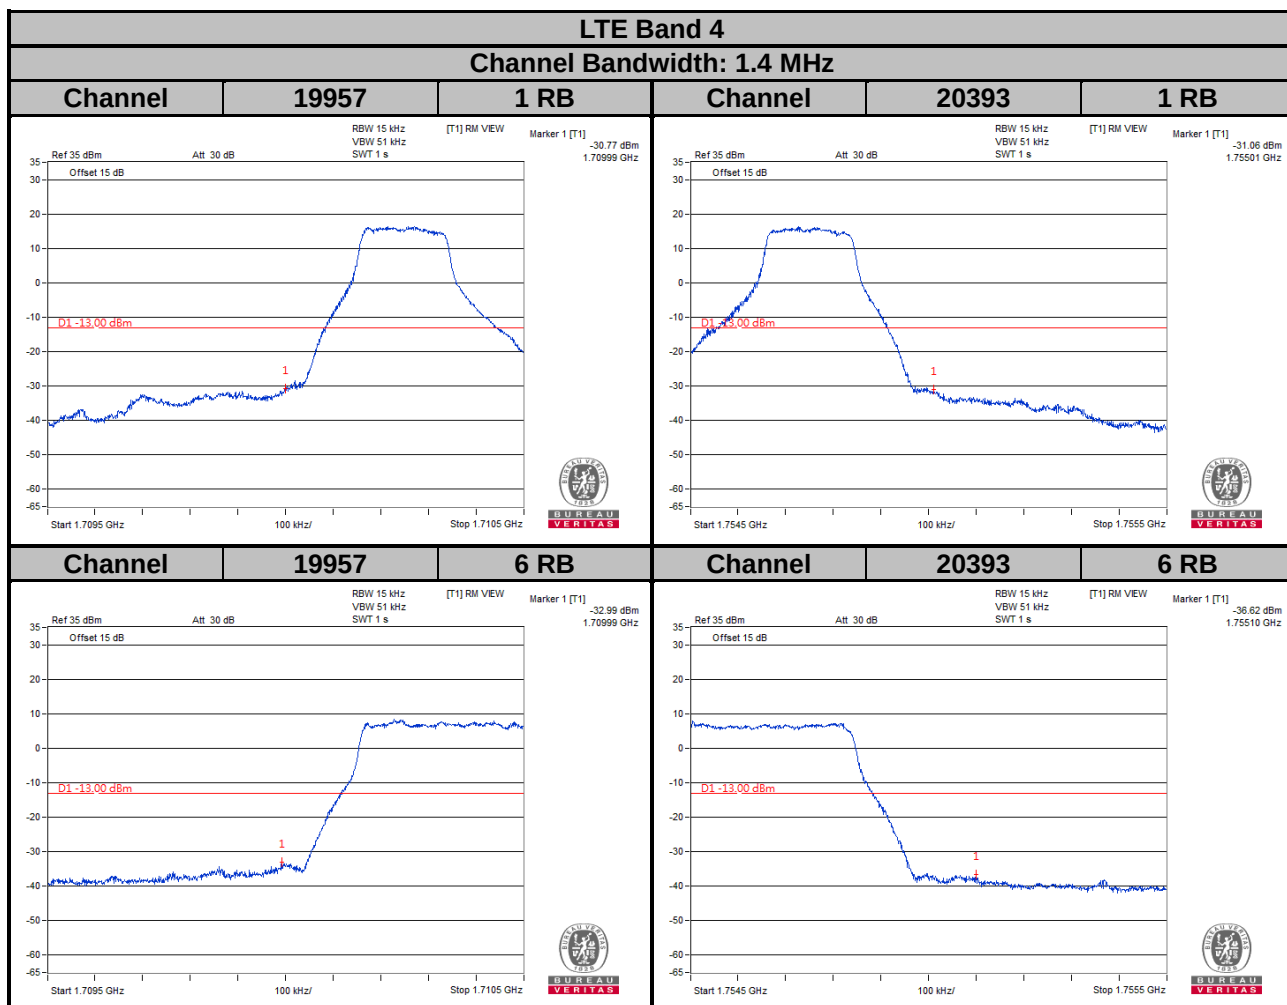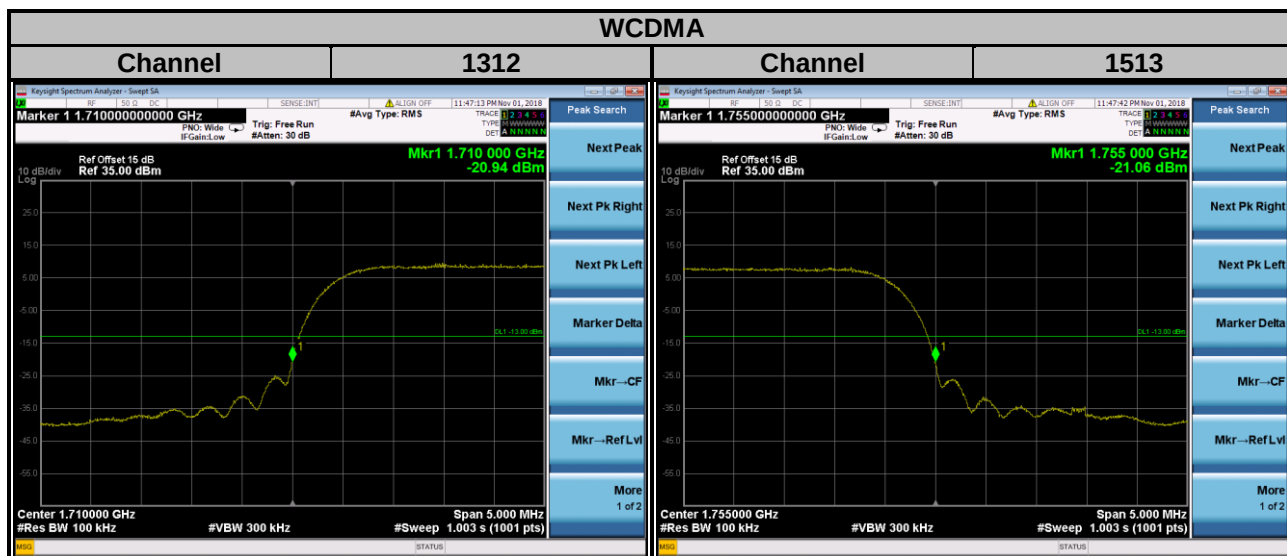


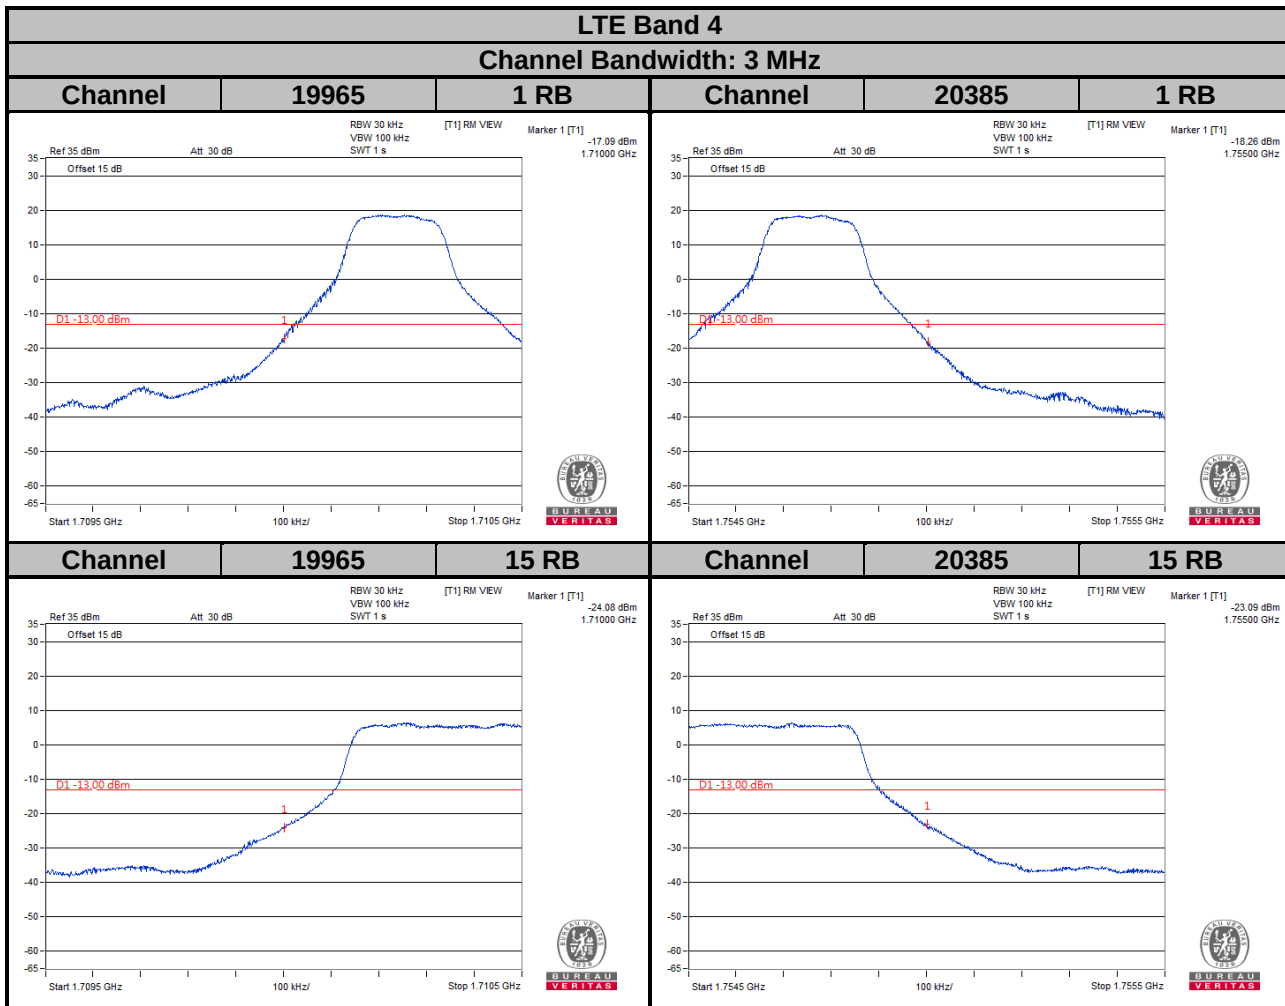

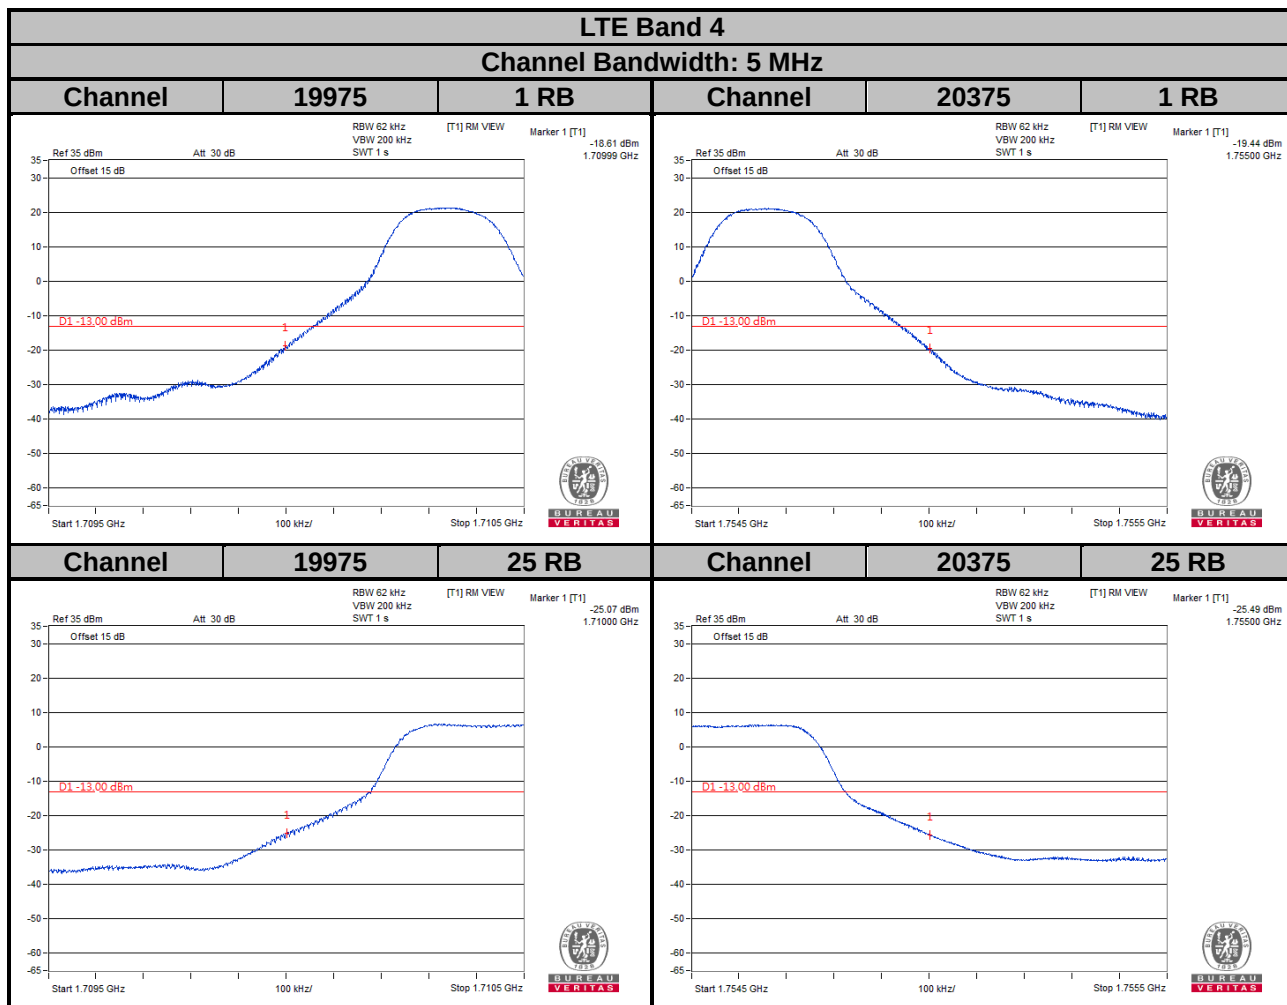

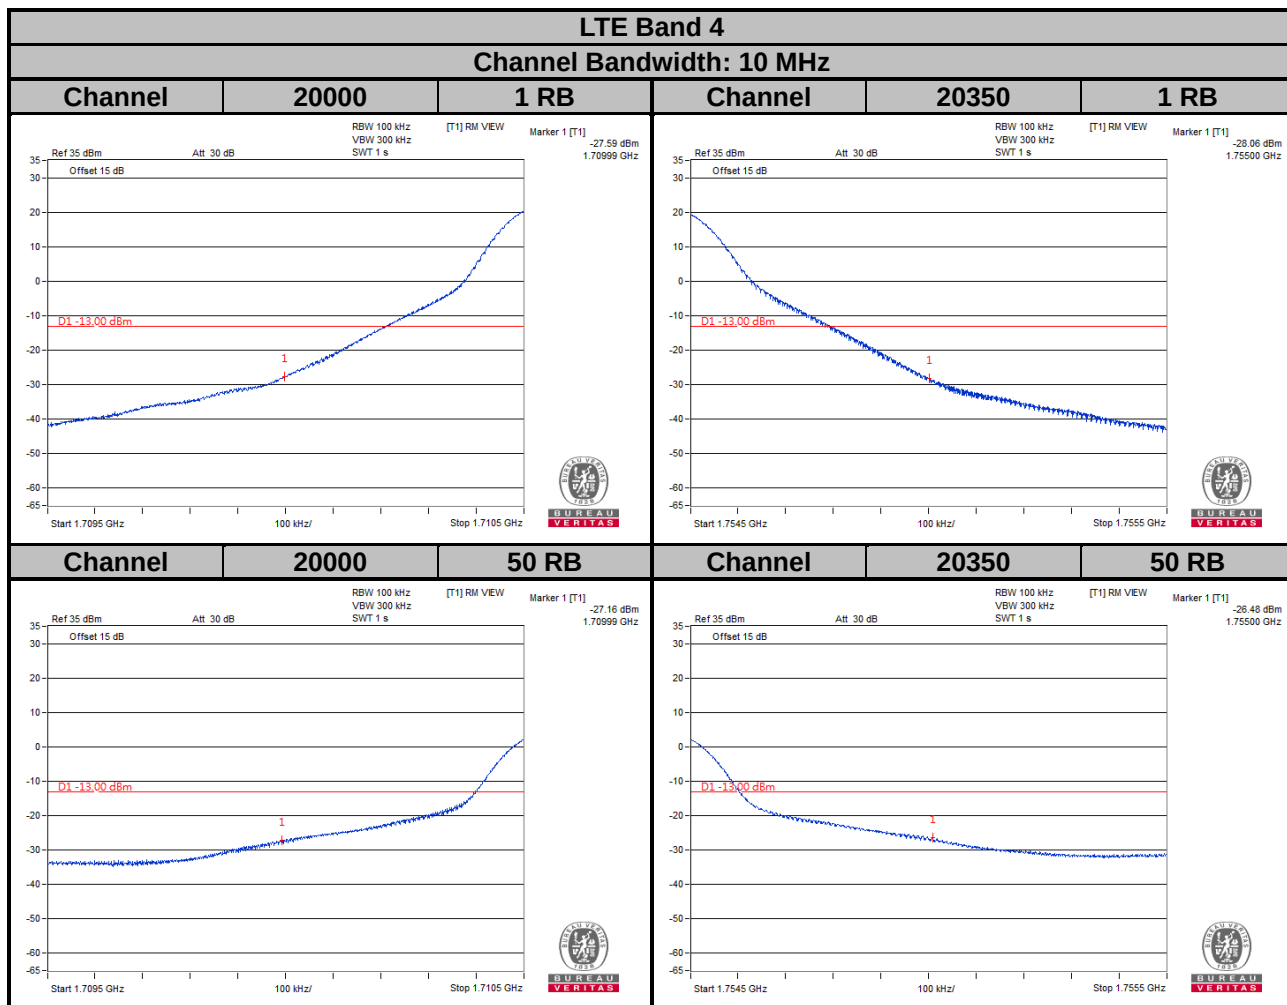


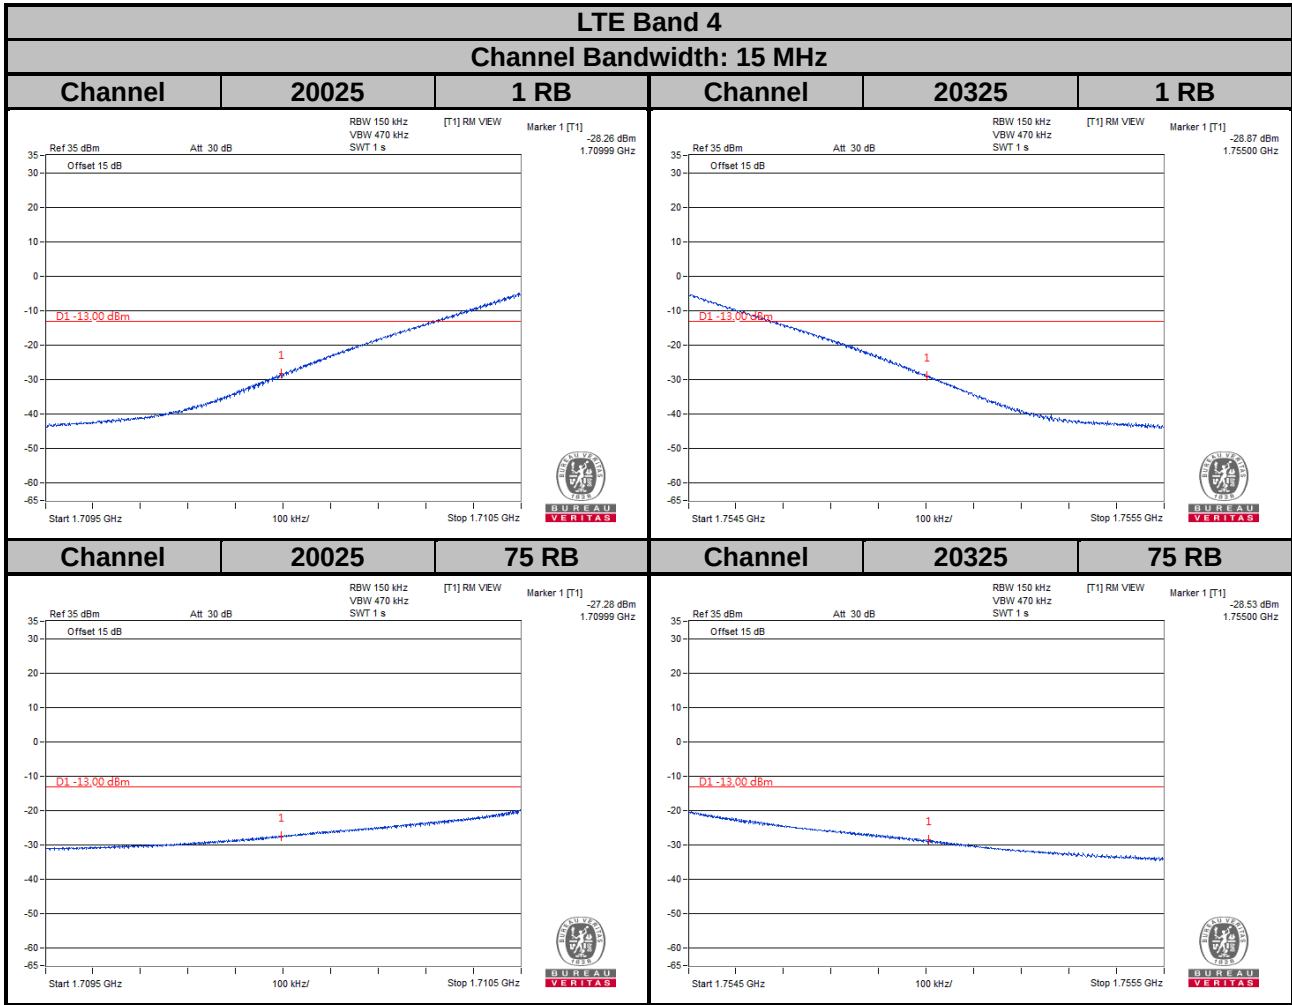


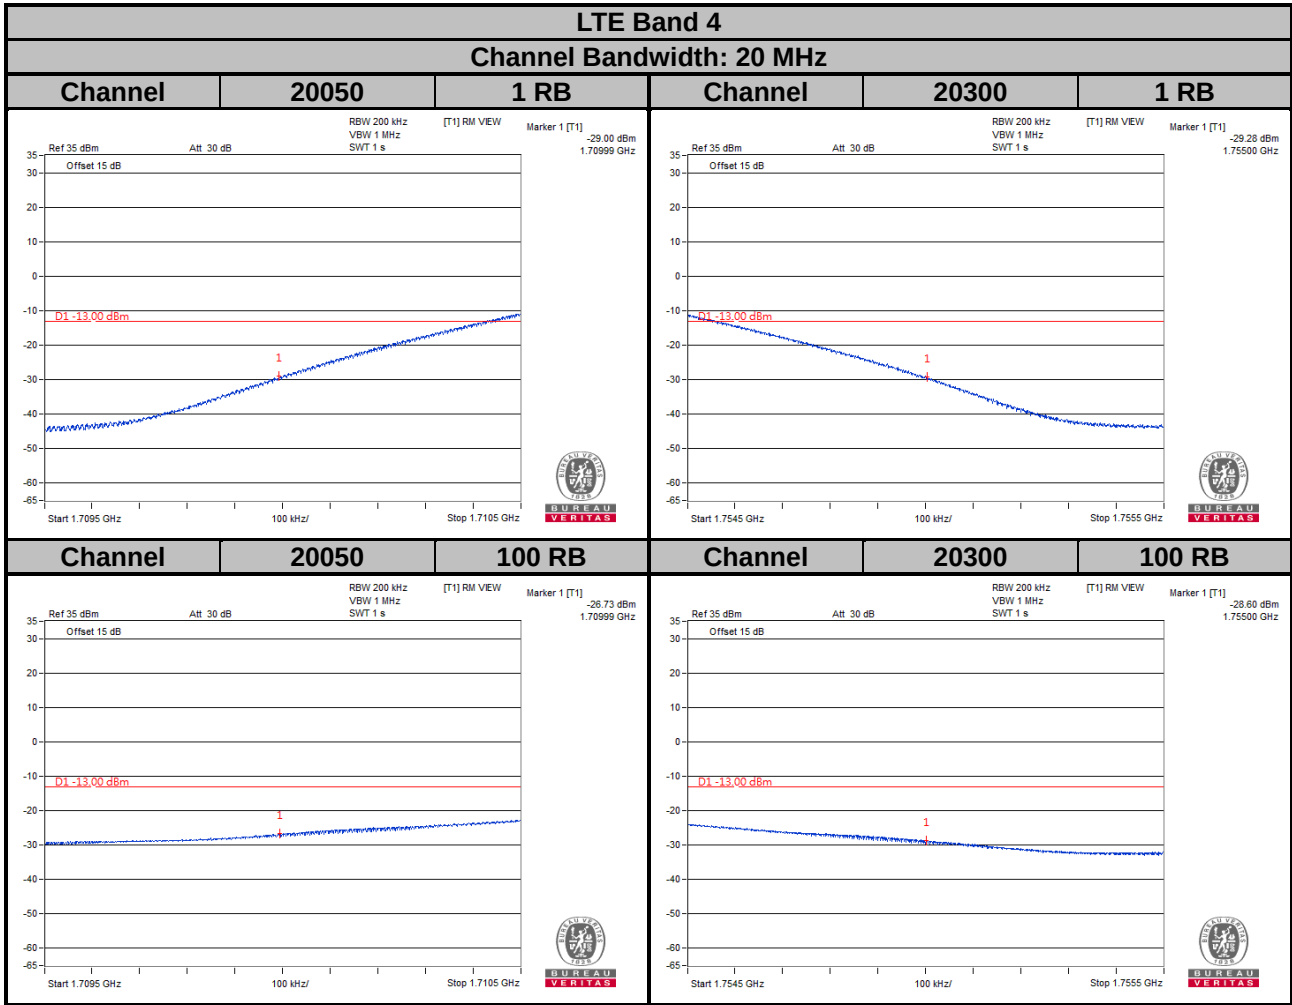

LTE Band 12


Channel Bandwidth: 1.4 MHz

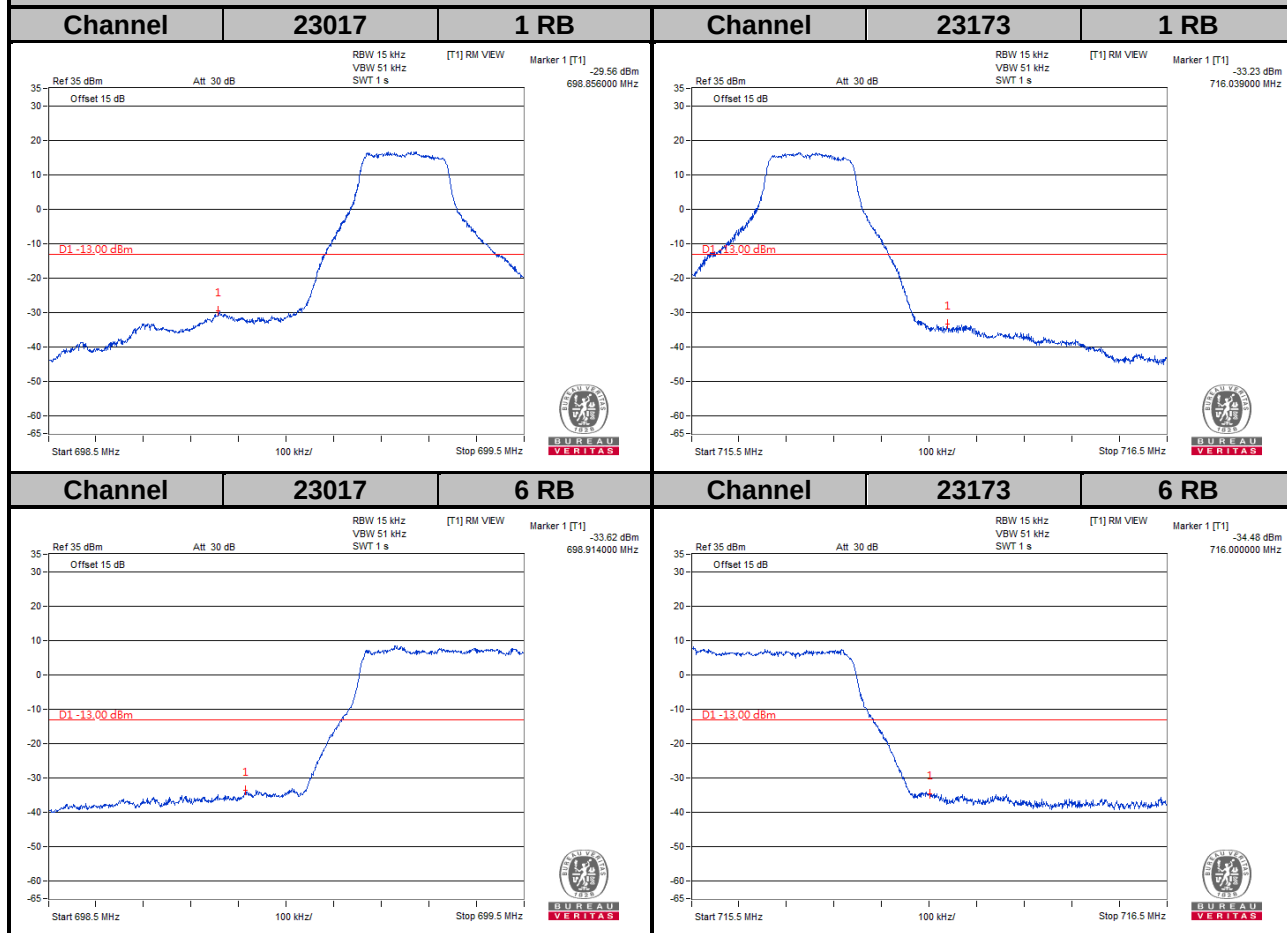


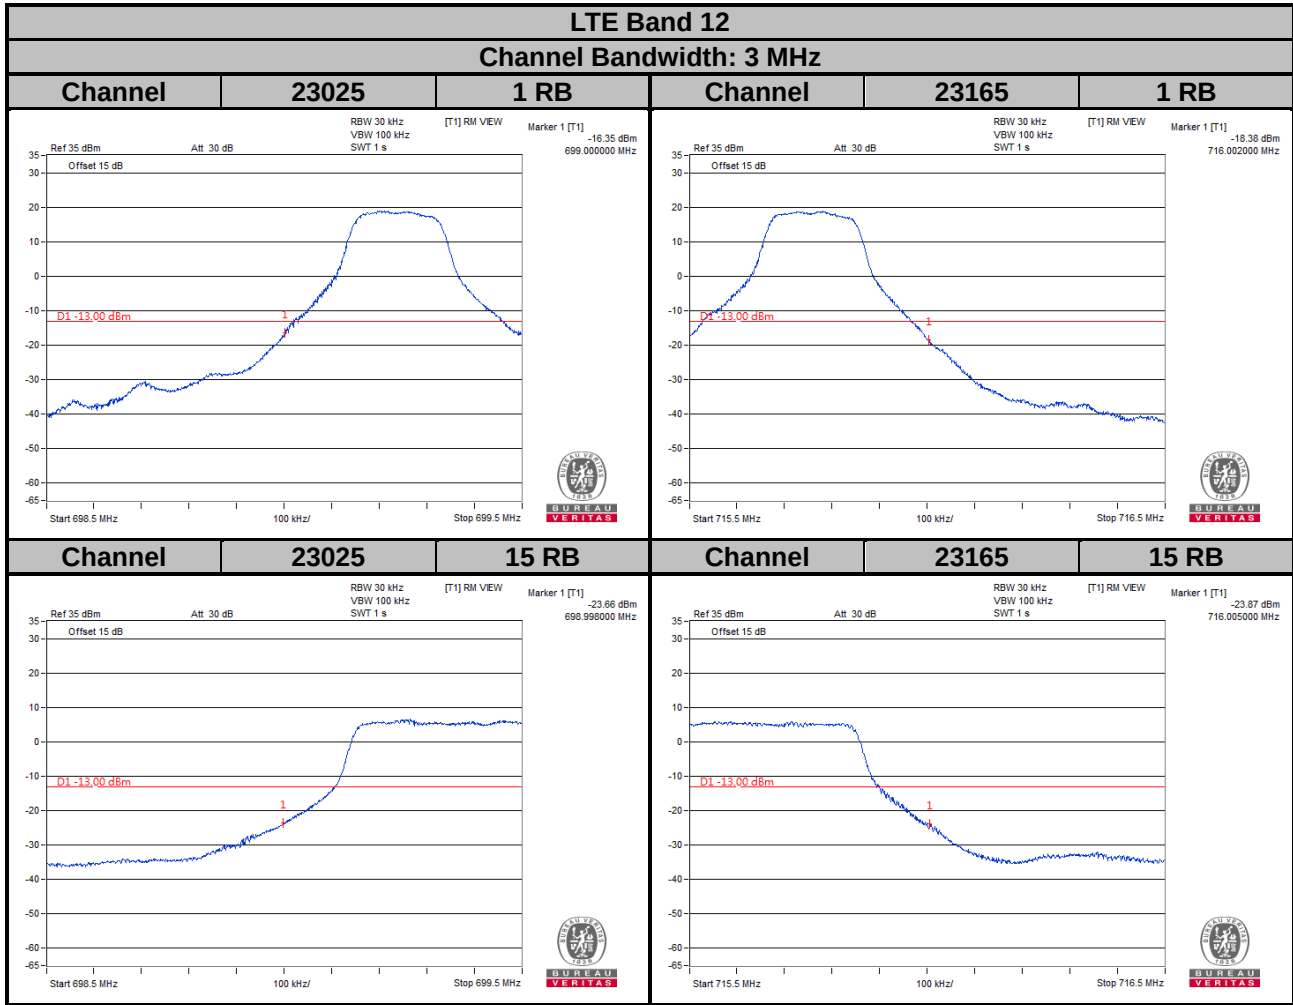



LTE Band 12


Channel Bandwidth: 5 MHz

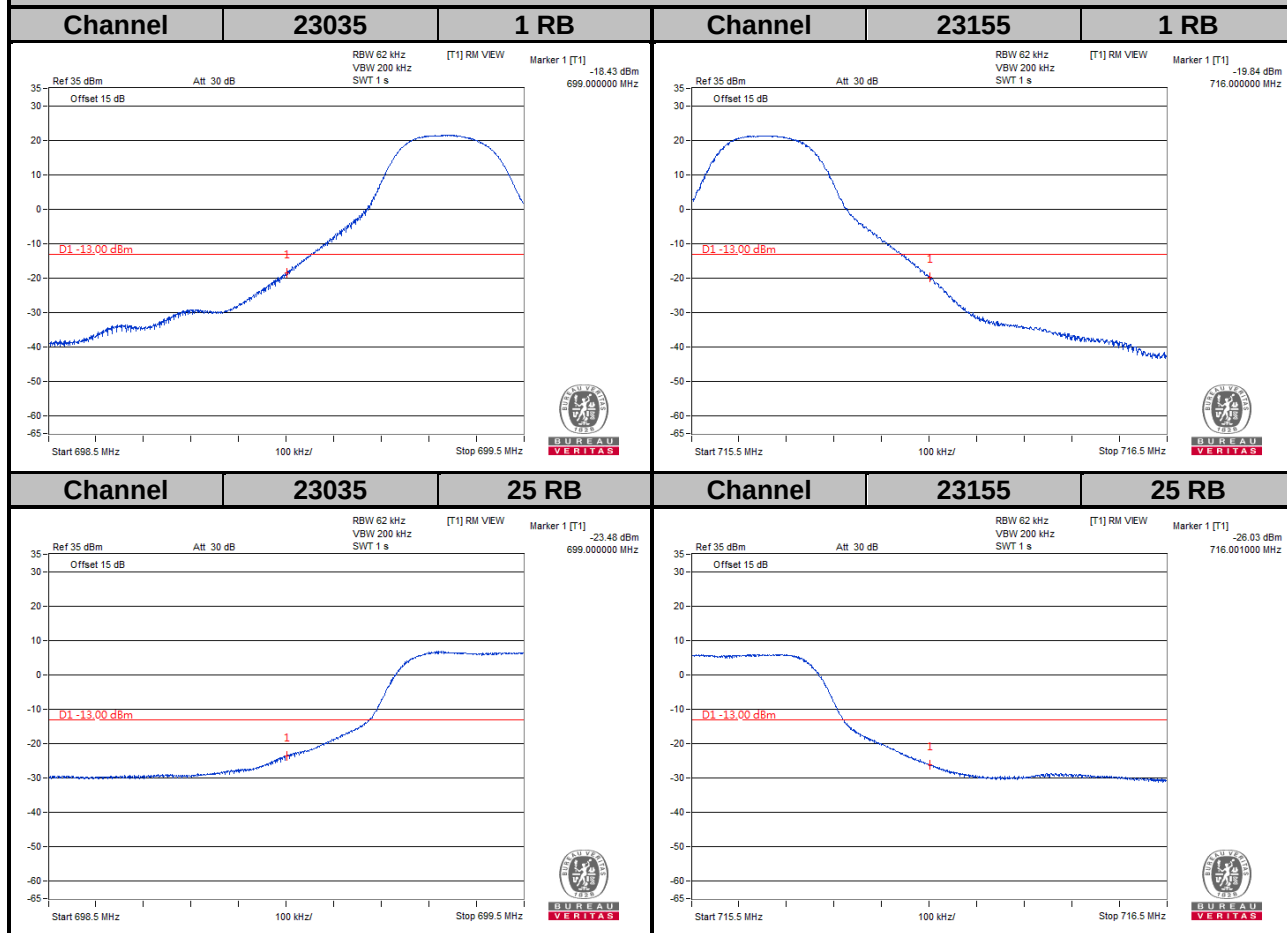


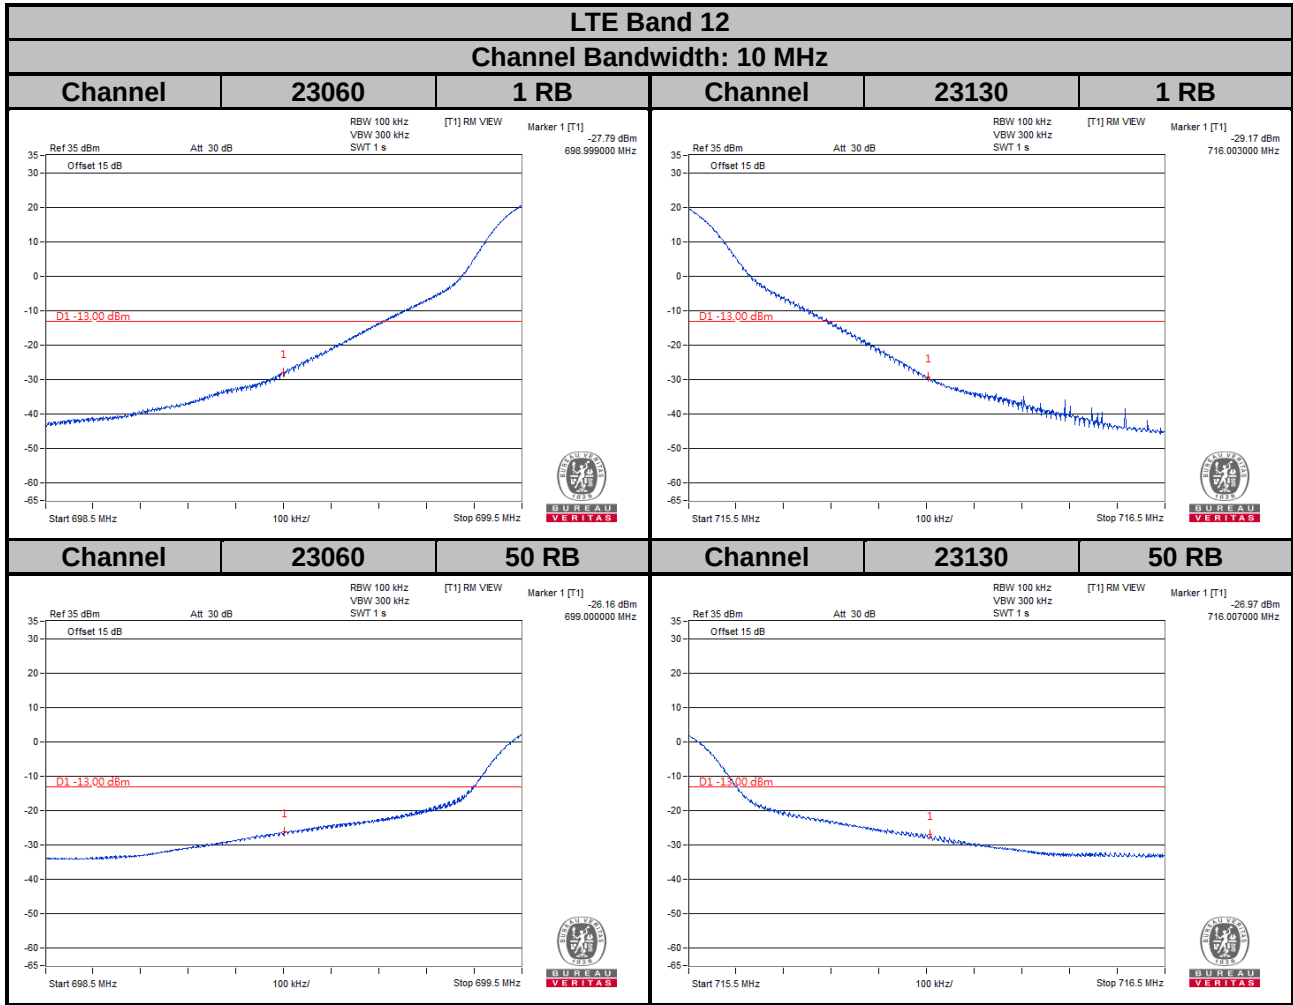


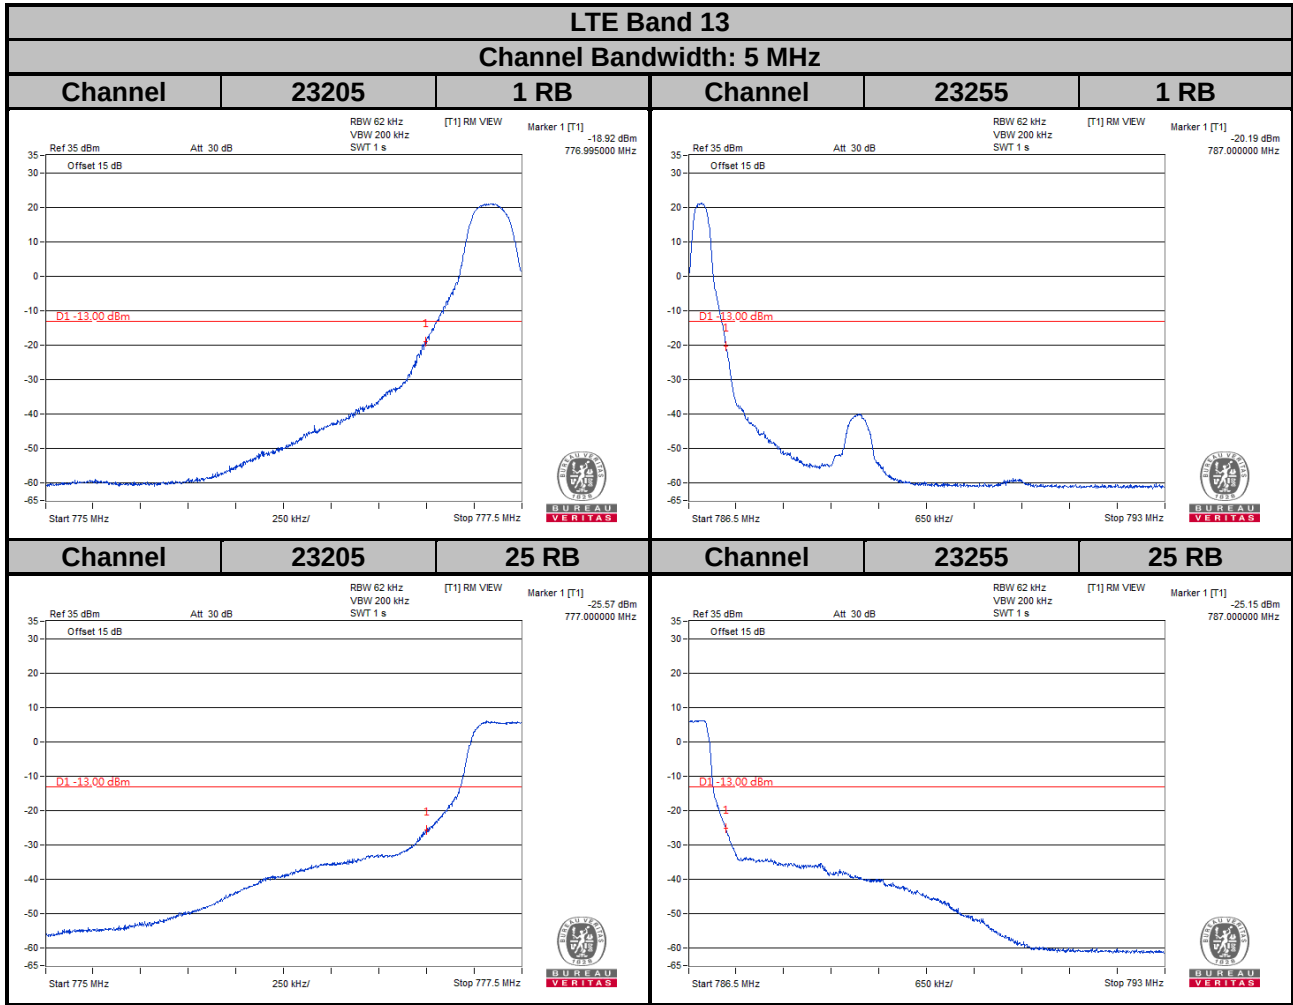

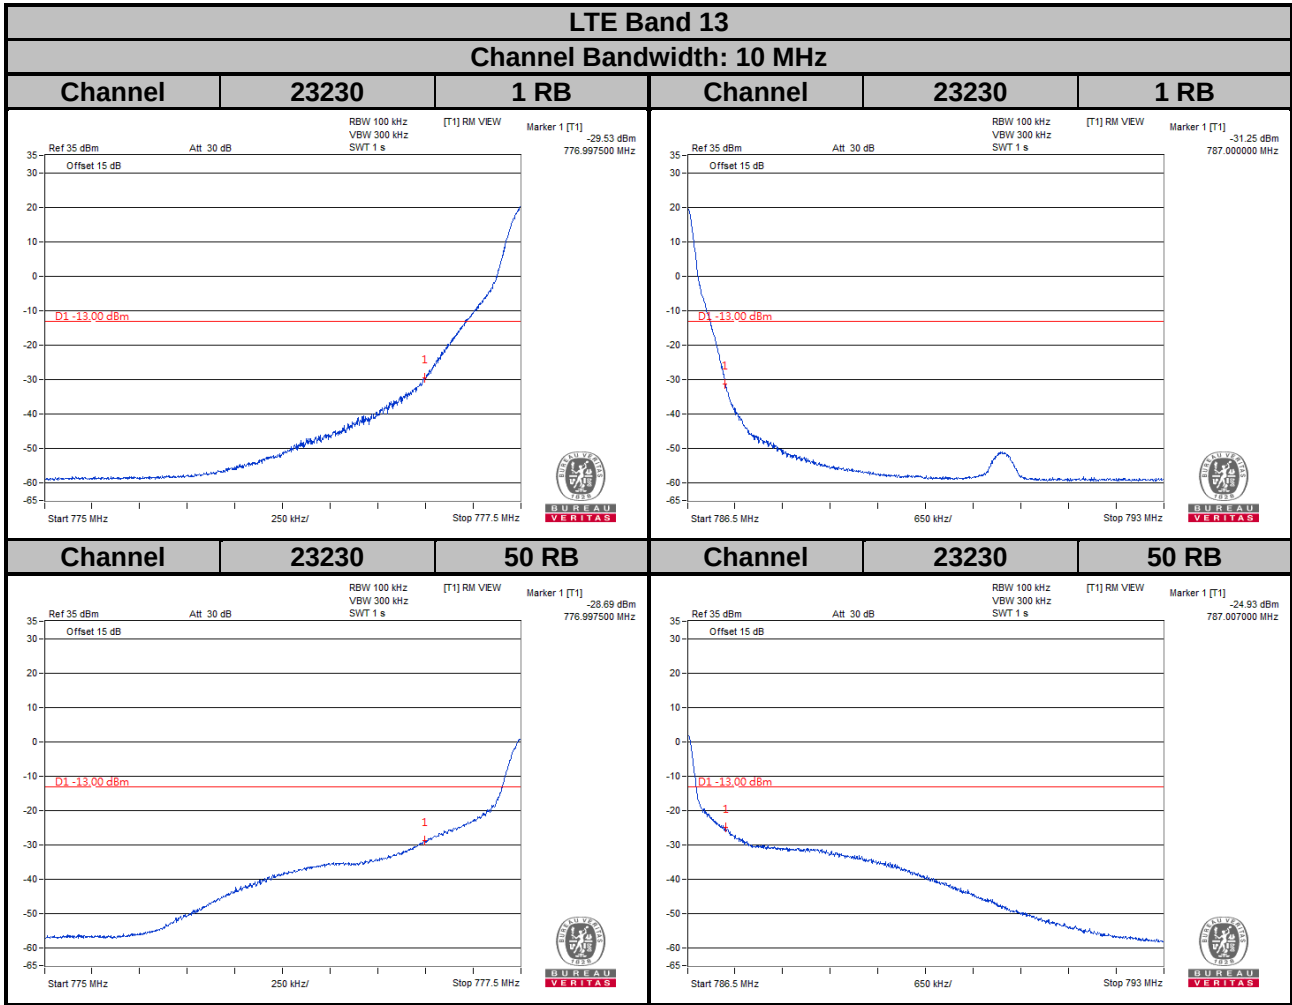

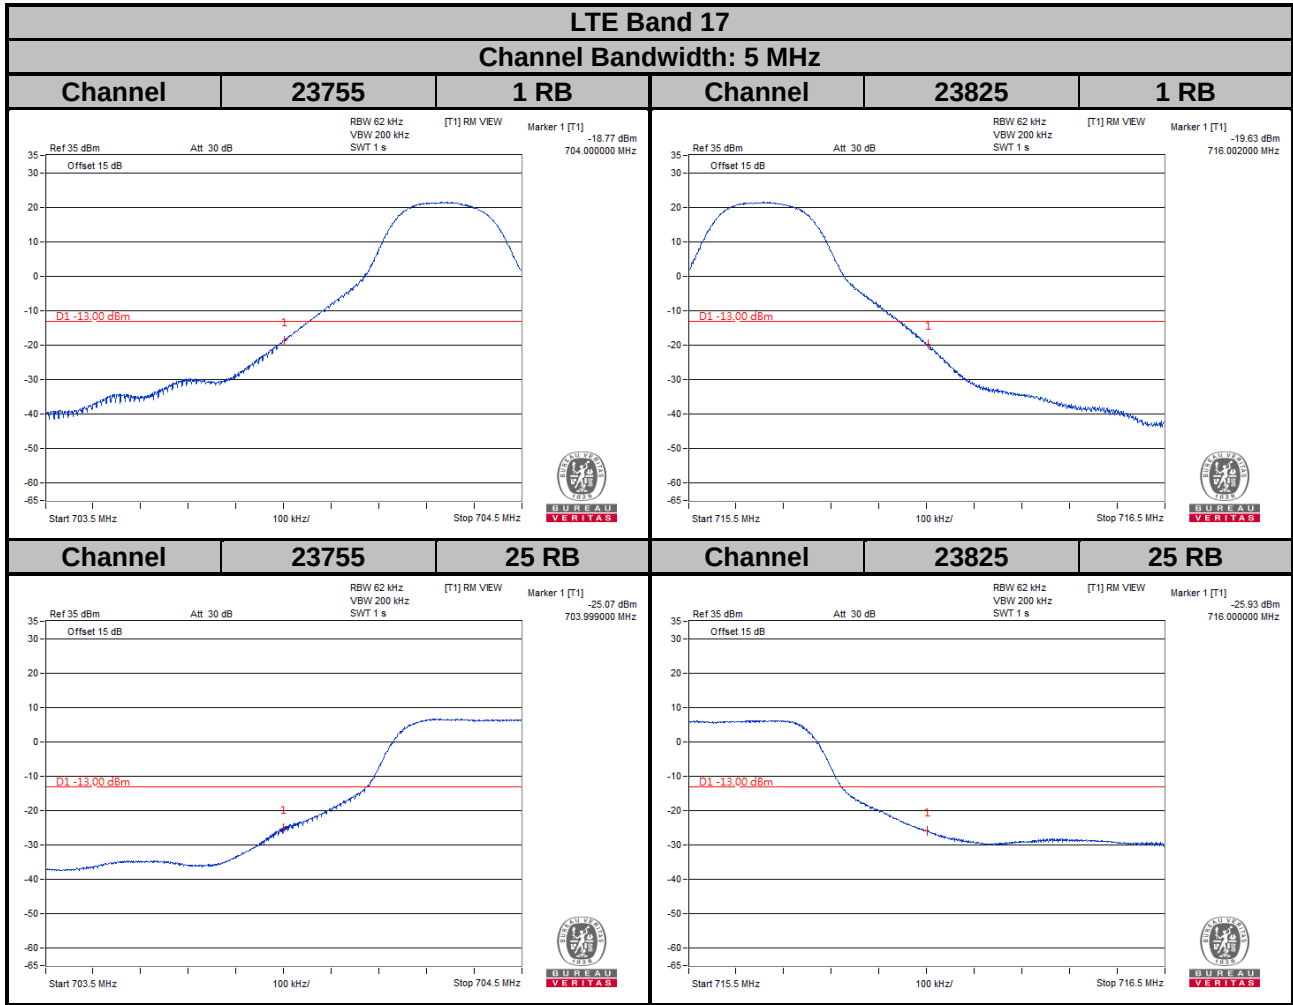


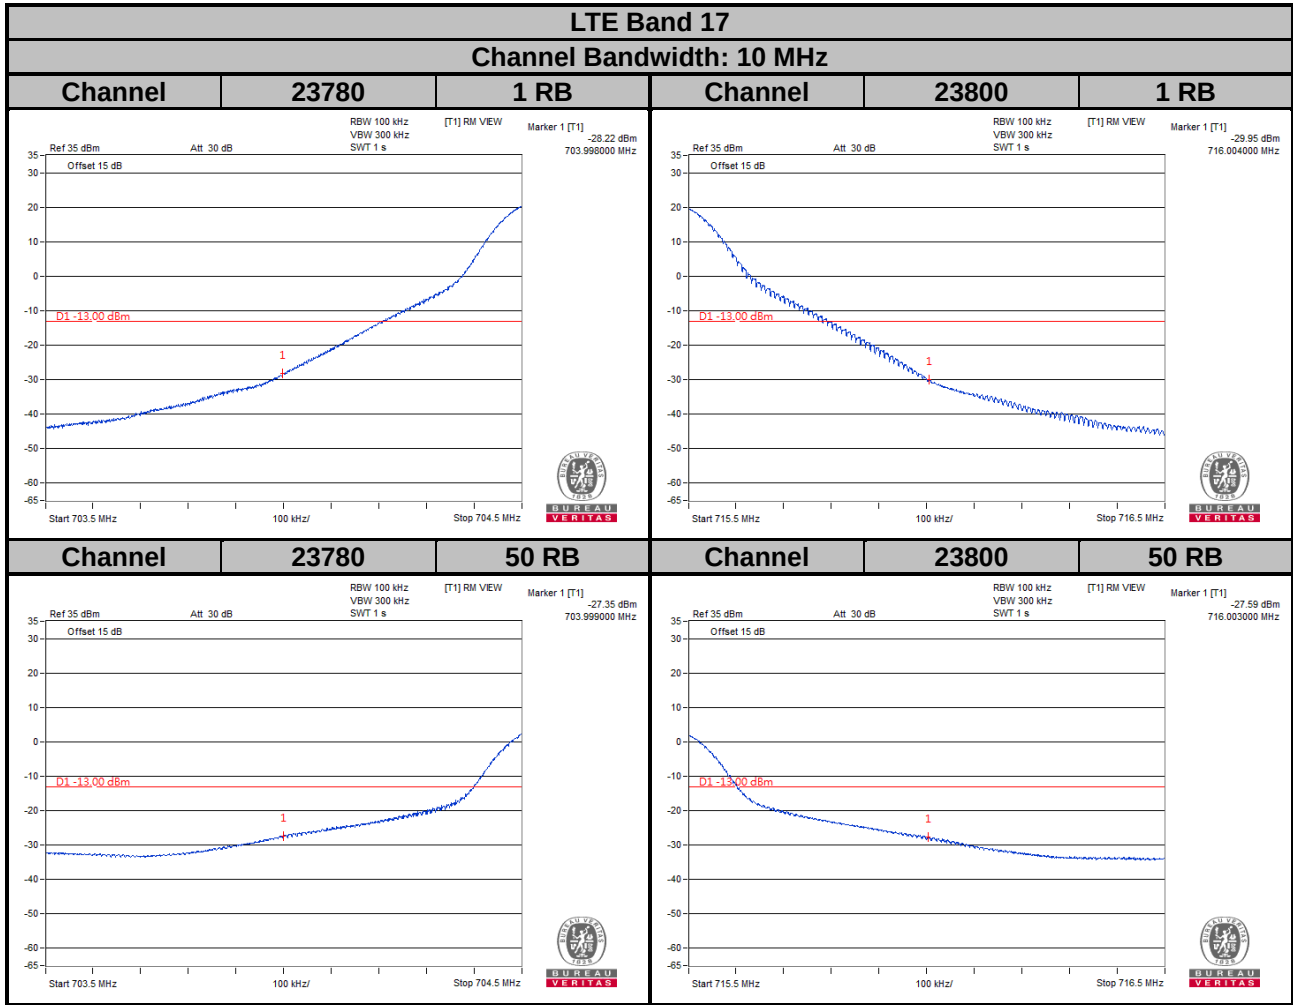

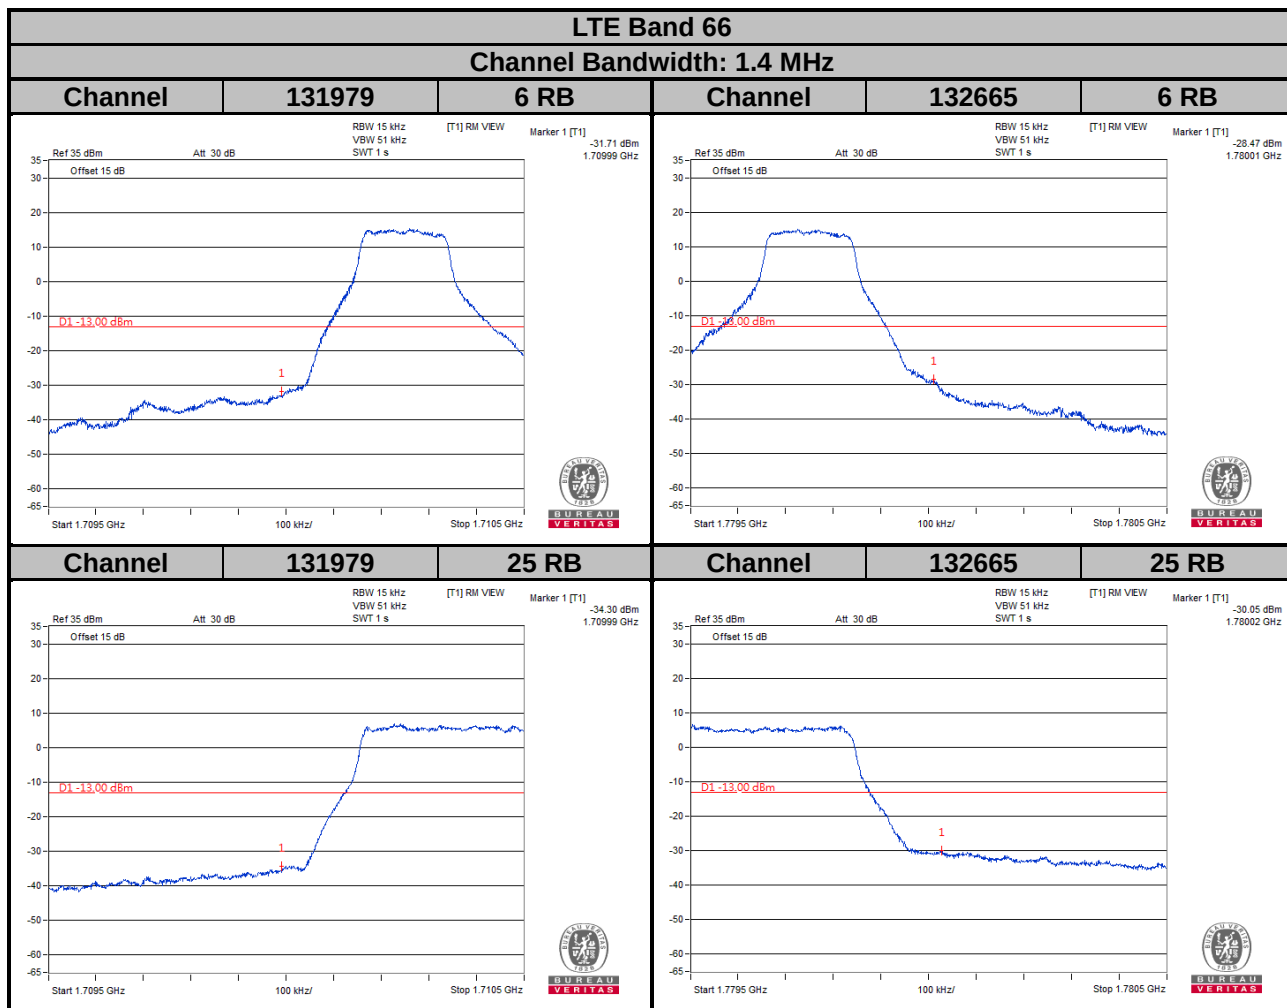


LTE Band 66

Channel Bandwidth: 3 MHz

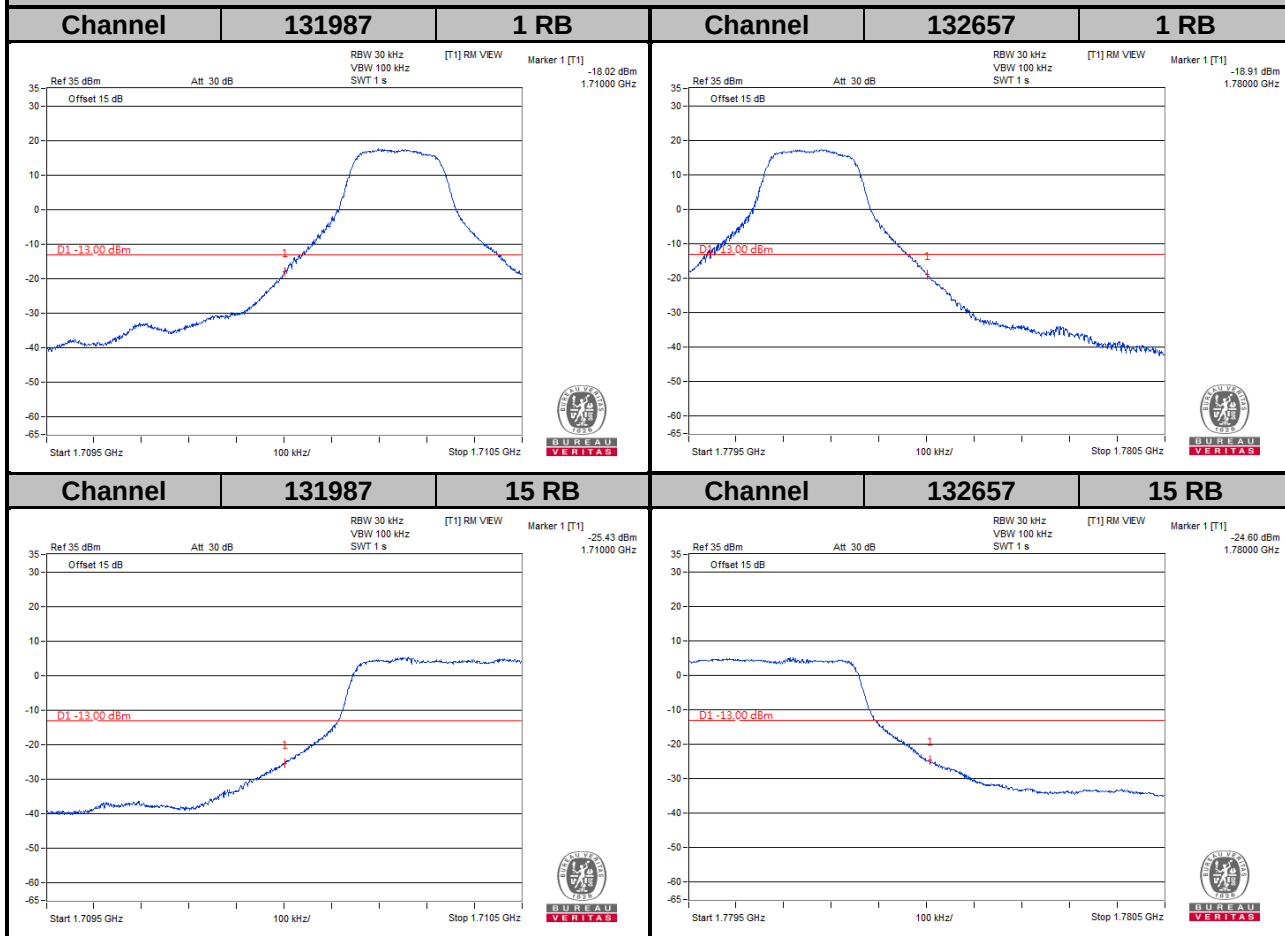


LTE Band 66


Channel Bandwidth: 5 MHz

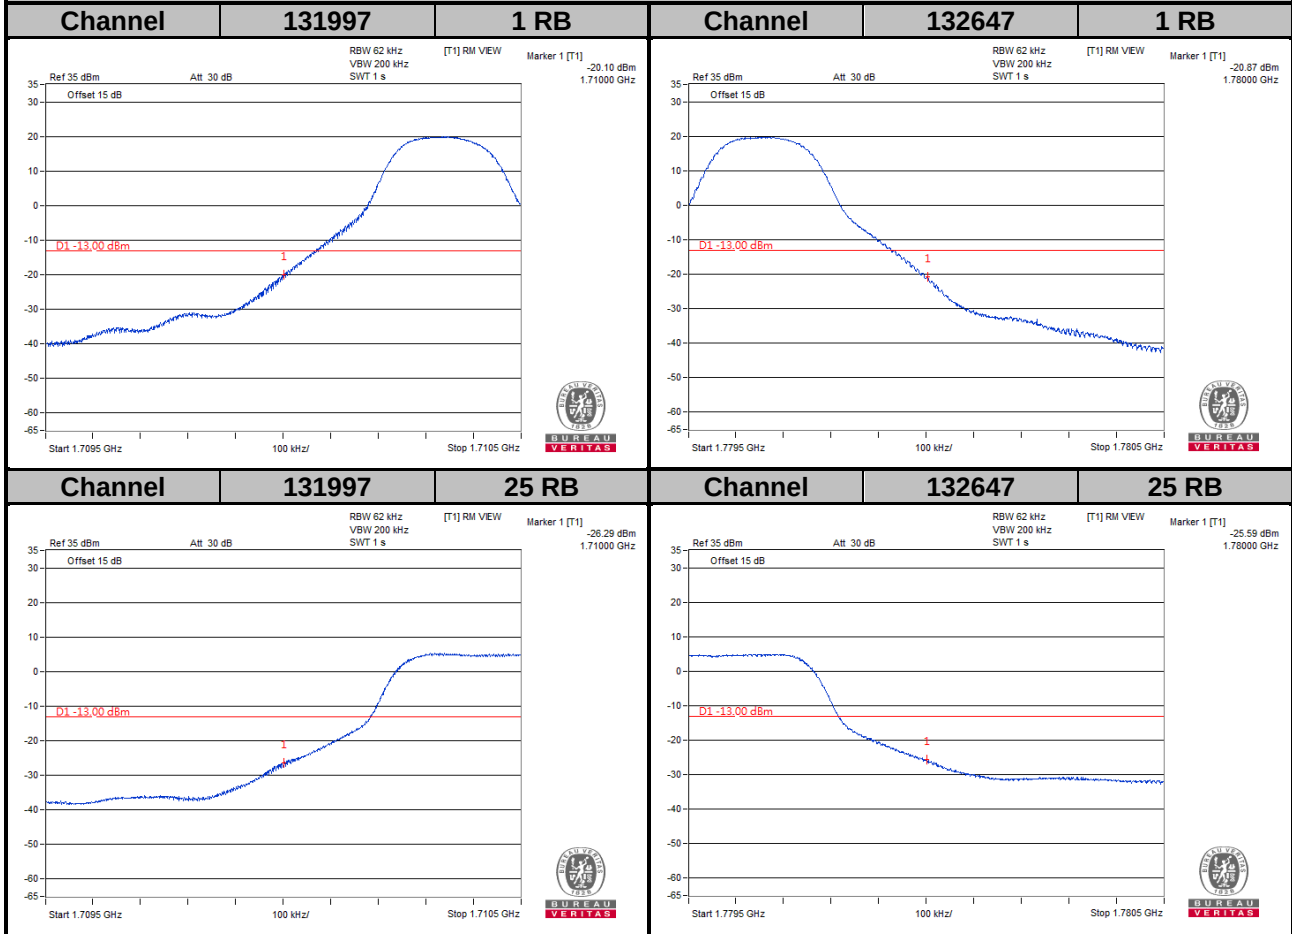


LTE Band 66


Channel Bandwidth: 10 MHz

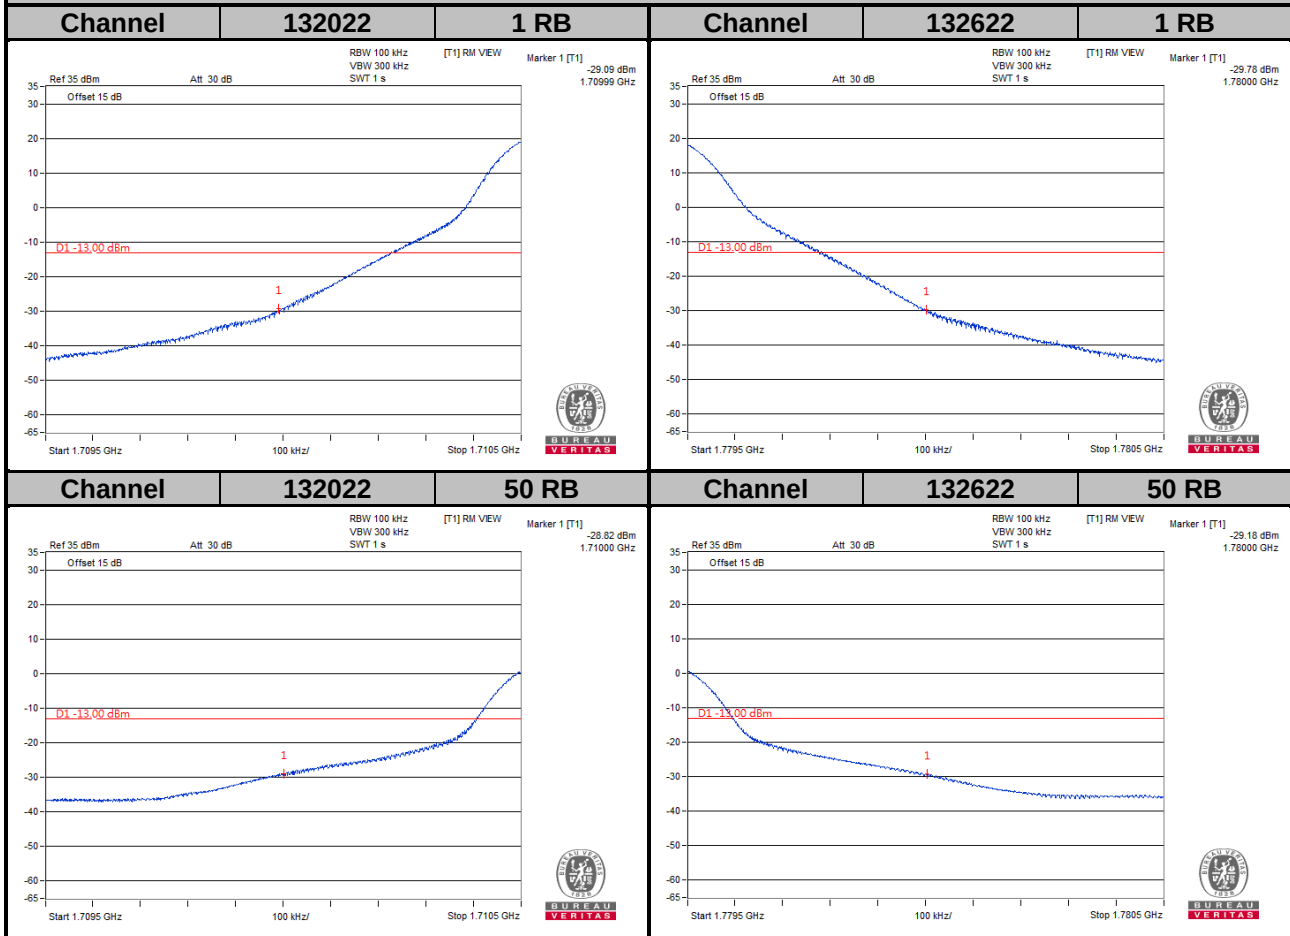

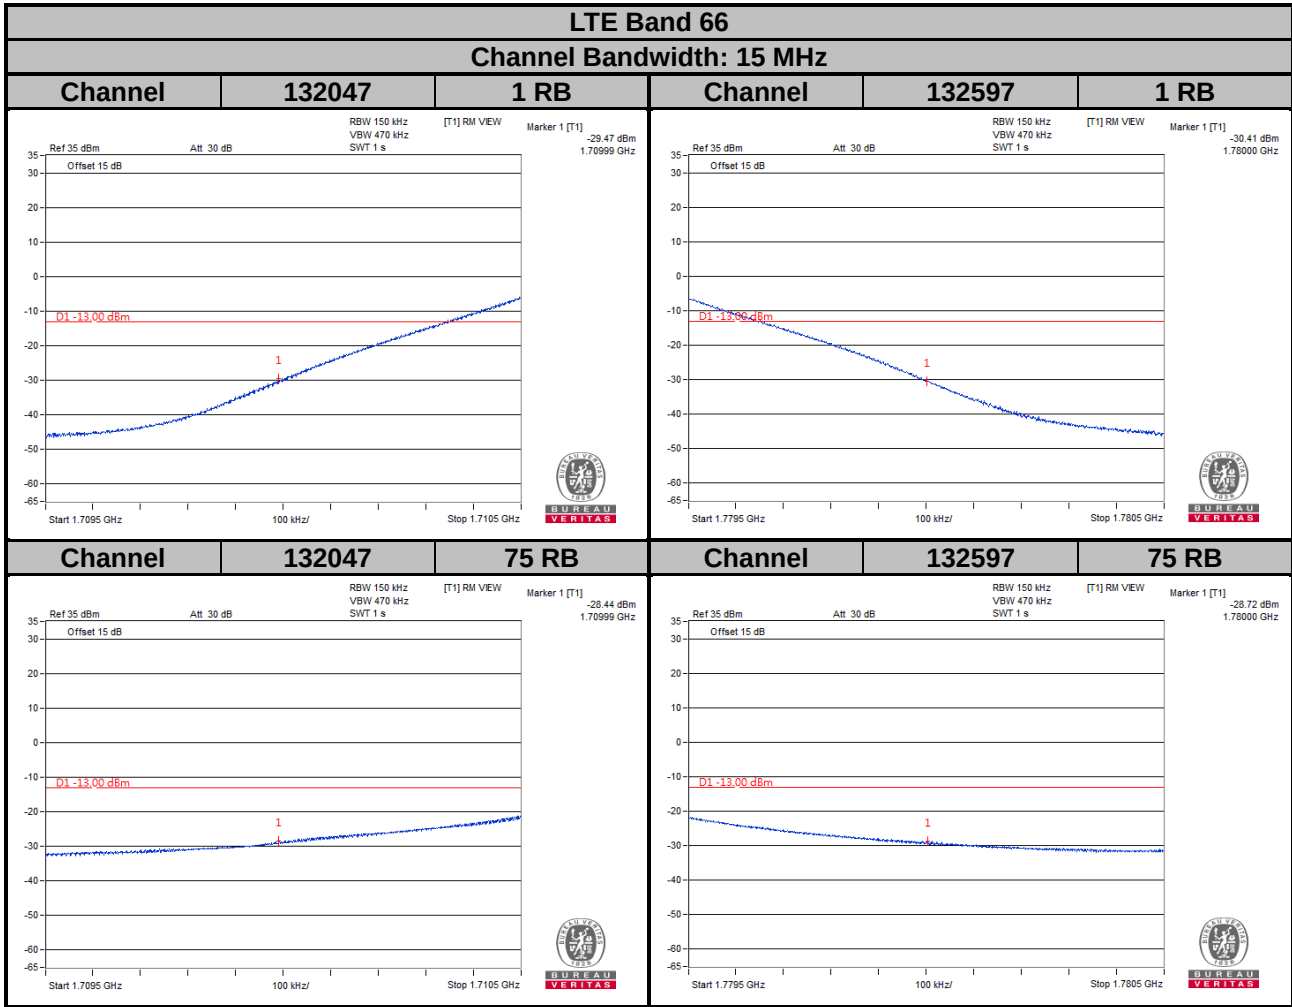

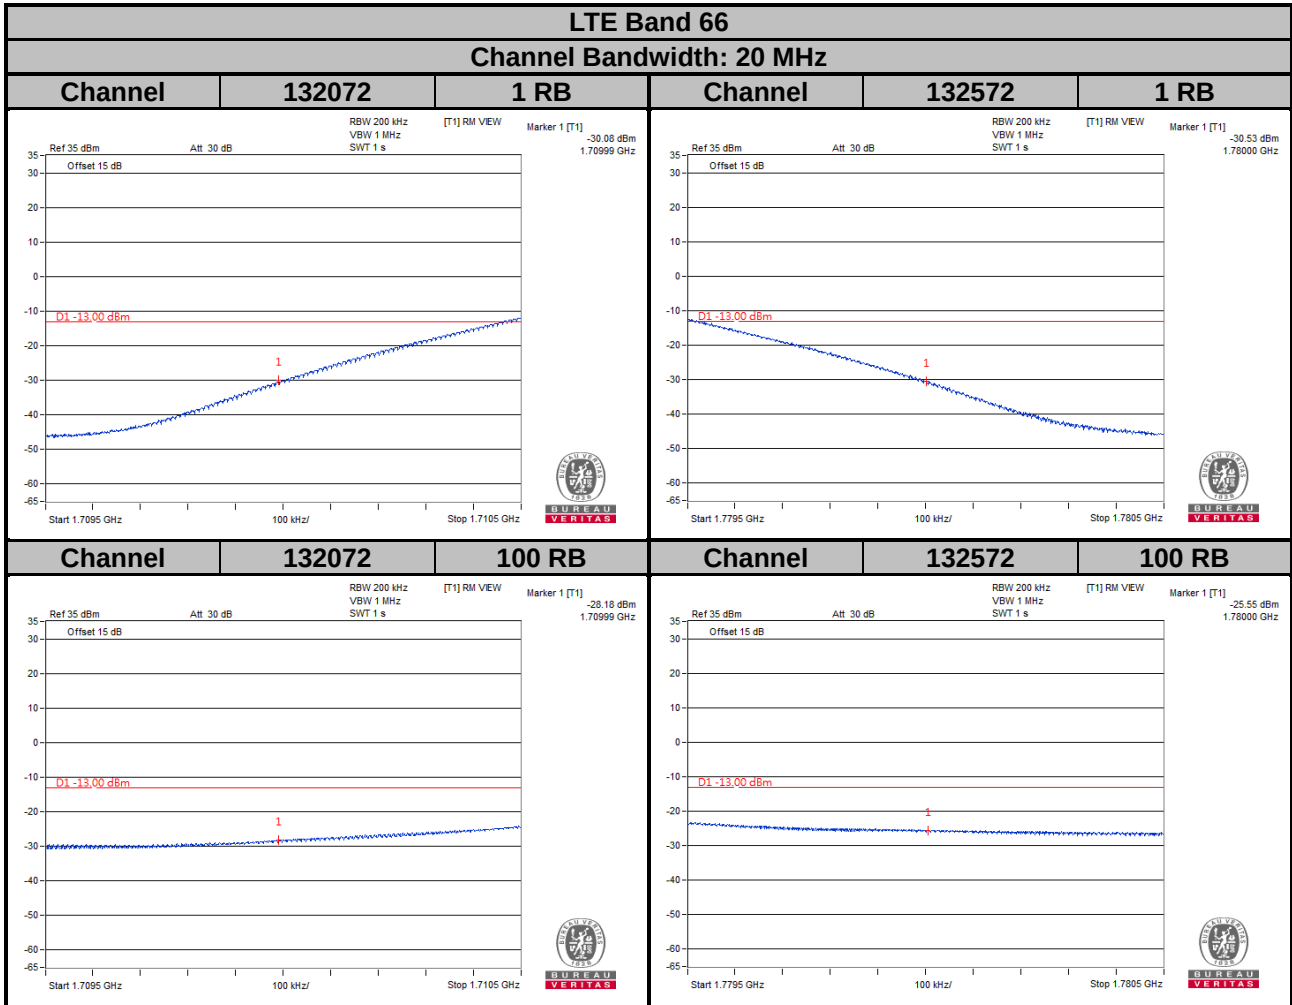

Emission Mask

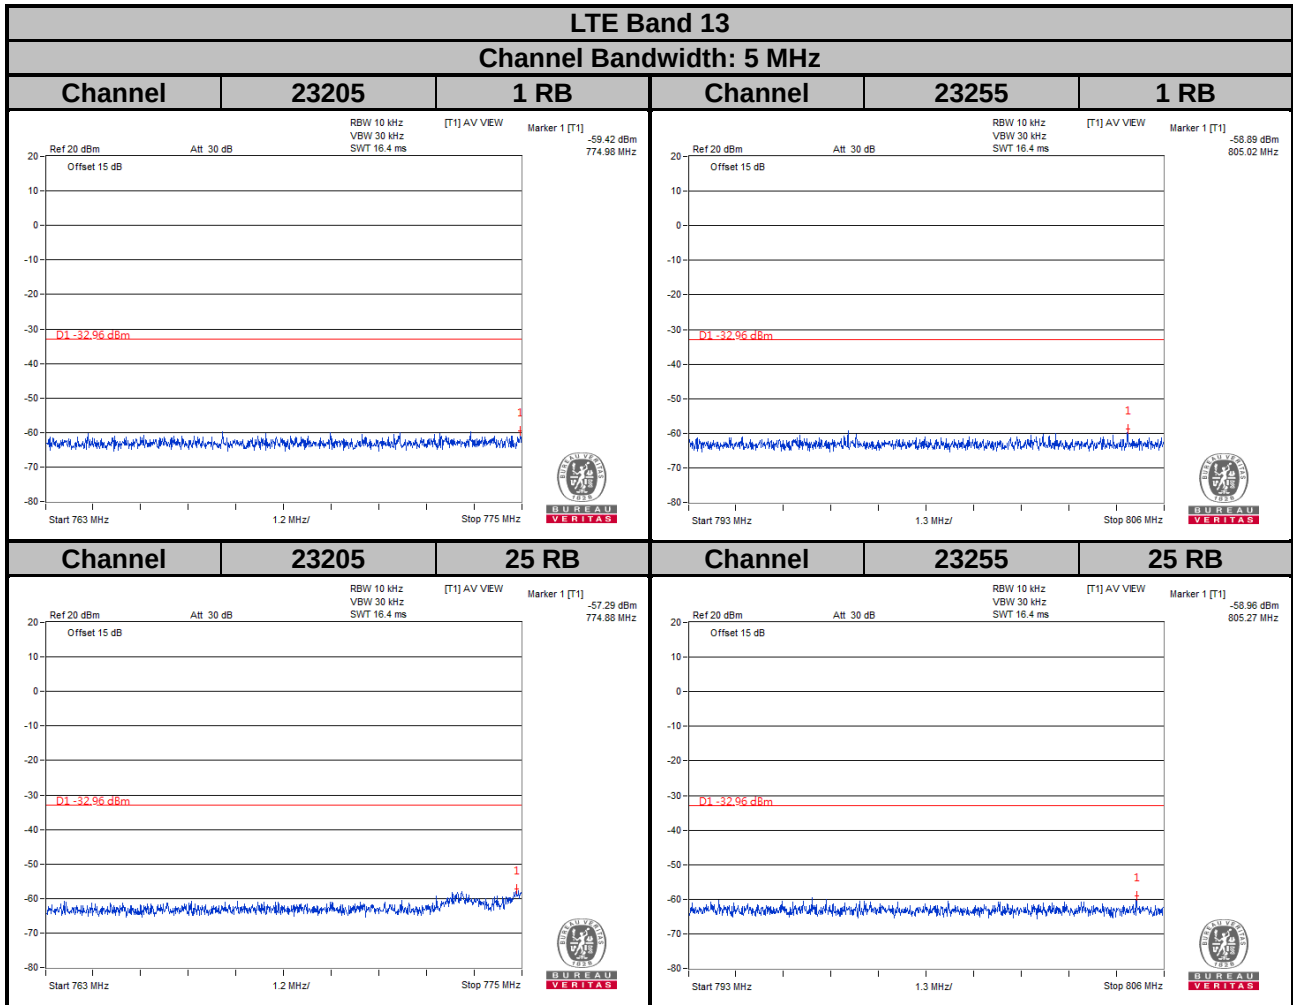

For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is $65 + 10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$

$$\text{Limit line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$



For the 763 - 775 MHz and 793 - 805 MHz band, the FCC limit is $65 + 10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$

$$\text{Limit line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$