



PRODUCT SPECIFICATION FOR APPROVAL

CUSTOMER :

PRODUCT NAME : Power Transmitter (Double coil)

PART No. : 0001.DZ.0010.0053

PRODUCT SPEC :
Inductance: $10\mu\text{H} \pm 10\% \times 2$
Shielding spec: $88.5 \times 60 \times 1$
Wire spec: 2 UEW/155 $0.08 \times 105 \times 11\text{Ts} \times 2$
($26.5 \times 17.5\text{mm}$ inner diameter)
Segment Length: 18mm

Double Sided Adhesive Tape on shielding side

DATE : 2025/03/12

VERSION : REV 1.0

Revision	Modified Content	Principle	Date	Note
REV 1.0	First release-English Version	Xiaoju zhou	2025-03-12	
PREPARED BY		CHECKED BY	APPROVED BY	

Authorized signature & company chop		
--	--	--

Attached is the product specification , any questions, please timely feedback to us, thank you!


Manufacturer: DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO., LTD

ADD: Xinfu Industrial Zone, Shijie Town, Dongguan City




SPECIFICATION

1.Shielding Mechanical Specification:

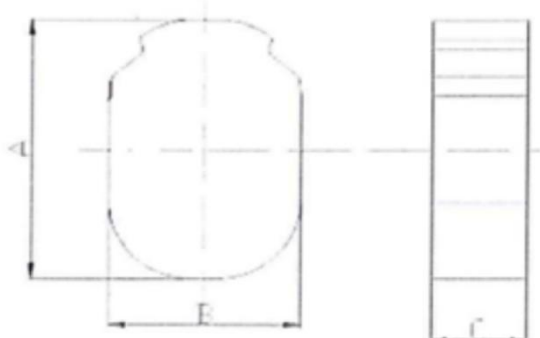产品名称	L88.5/60/20无孔	模具名称	L88.5/60/20			
			A	88.5	±	1.0
			B	60.0	±	0.6
			C	20.0	±	0.4

2.Schematic:

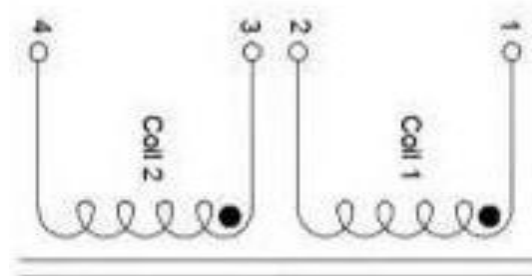

3.Electrical Specification :


TEMPERATURE:25±10°C, RELATIVE HUMIDITY:65±20%

项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND.inductance value	coil 1: 1-2	10uH±10%	100KHz/1.0Vrms environment temperature: 25°C	LCZ METER 1062
	coil 2: 3-4	10uH±10%		



Shenzhen Chenxing Electronic Technology Co.,Ltd.

4.Product Picture:

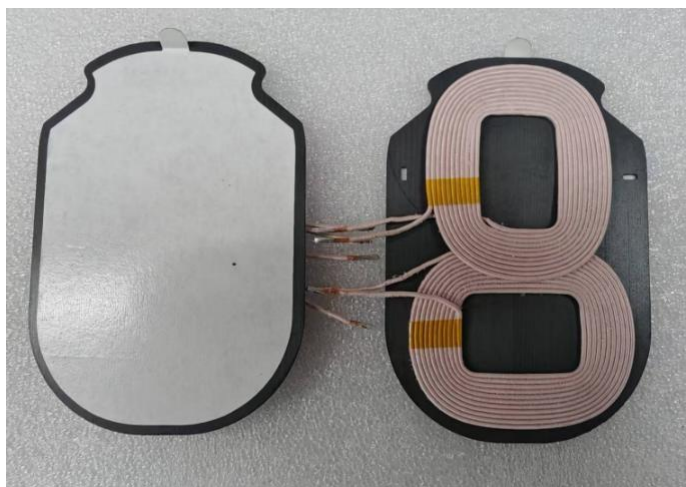

III

Company: ShenZhen Chenxing Electronic Technology Co., Ltd.

Address: Room 510, Building NO. 1, Xinkecheng industrial park, 51 Dabao Road Baoan District Shenzhen City