

LTE Band 5 (Part 22H) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	20407	824.7	QPSK	-38.222	-13
			16QAM	-41.235	-13
1.4	20643	848.3	QPSK	-38.226	-13
			16QAM	-38.131	-13
3	20415	825.5	QPSK	-33.039	-13
			16QAM	-31.710	-13
3	20635	847.5	QPSK	-32.598	-13
			16QAM	-31.073	-13
5	20425	826.5	QPSK	-27.524	-13
			16QAM	-27.822	-13
5	20625	846.5	QPSK	-24.064	-13
			16QAM	-23.323	-13
10	20450	829	QPSK	-27.517	-13
			16QAM	-27.088	-13
10	20800	844	QPSK	-29.487	-13
			16QAM	-30.181	-13

LTE Band 12 (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
1.4	23017	699.7	QPSK	-35.584	-13
			16QAM	-35.939	-13
1.4	23173	715.3	QPSK	-38.739	-13
			16QAM	-39.730	-13
3	23025	700.5	QPSK	-33.400	-13
			16QAM	-31.324	-13
3	23165	714.5	QPSK	-34.357	-13
			16QAM	-33.504	-13
5	23035	701.5	QPSK	-28.429	-13
			16QAM	-28.437	-13
5	23155	713.5	QPSK	-30.319	-13
			16QAM	-30.226	-13
10	23060	704	QPSK	-29.160	-13
			16QAM	-27.749	-13
10	23130	711	QPSK	-29.814	-13
			16QAM	-30.678	-13

LTE Band 17 (Part 27) result

BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	23755	706.5	QPSK	-28.787	-13
			16QAM	-27.813	-13
5	23825	713.5	QPSK	-30.404	-13
			16QAM	-30.351	-13
10	23780	709	QPSK	-27.628	-13
			16QAM	-28.778	-13
10	23800	711	QPSK	-32.671	-13
			16QAM	-29.954	-13


Test Plots

LTE Band 2 (Part 24E)

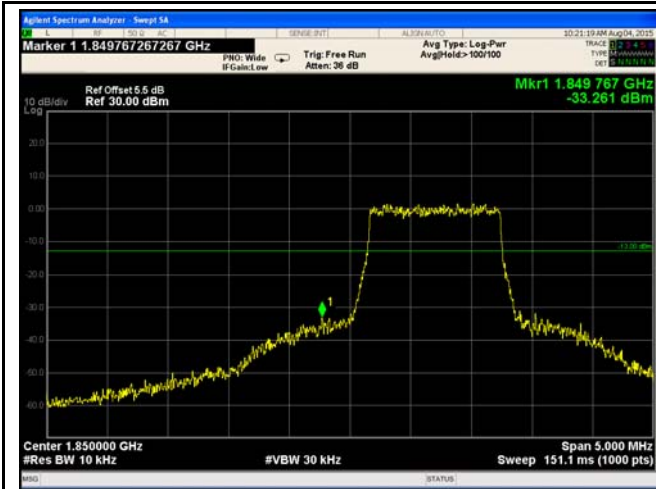


LTE Band 2 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.03/10)=4.5+1.0=5.5 dB

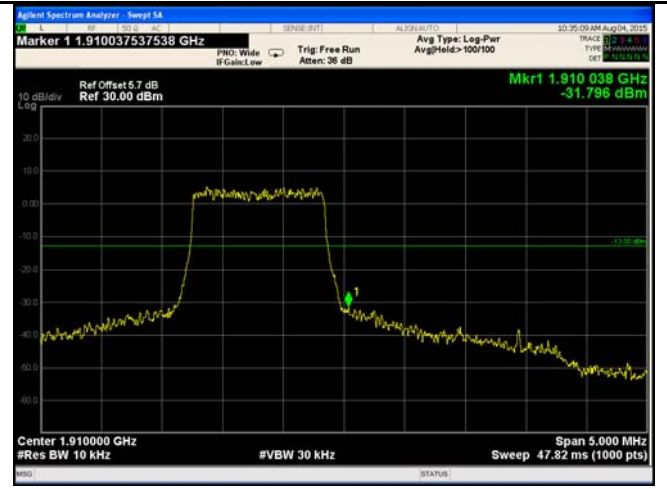


LTE Band 2 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.11/10)=4.5+1.2=5.7 dB

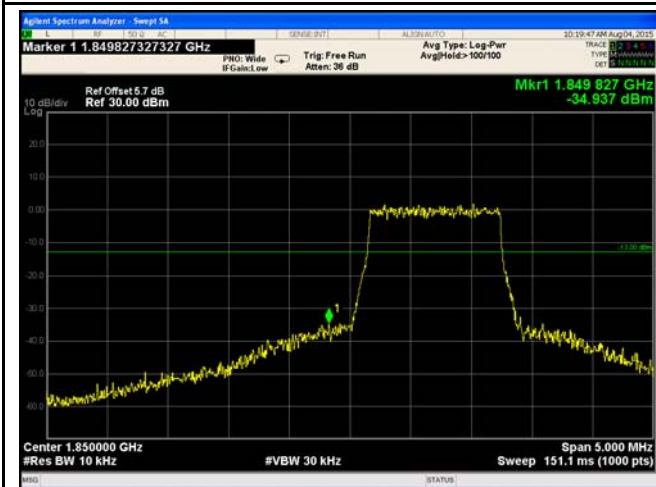


LTE Band 2 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.02/10)=4.5+1.2=5.7 dB

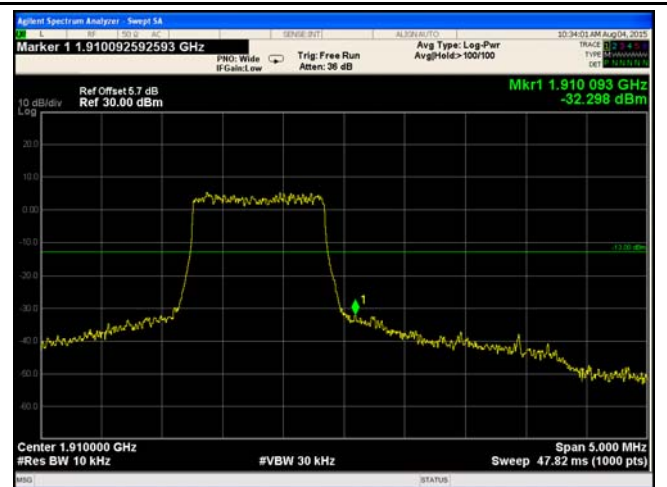


LTE Band 2 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(13.12/10)=4.5+1.2=5.7 dB

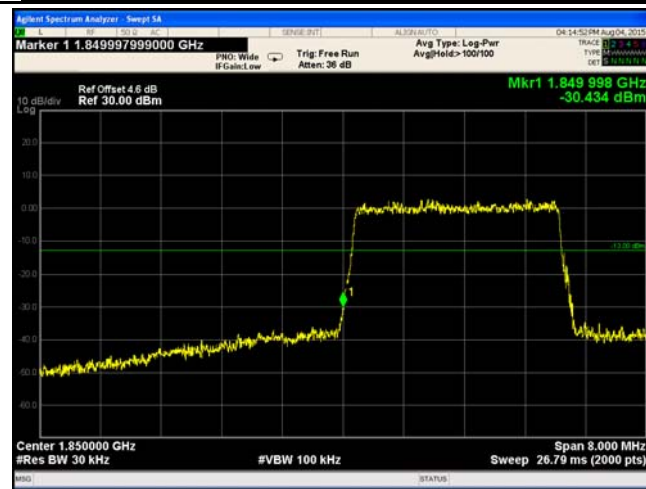


LTE Band 2 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.44/30)=4.5+0.1=4.6 dB

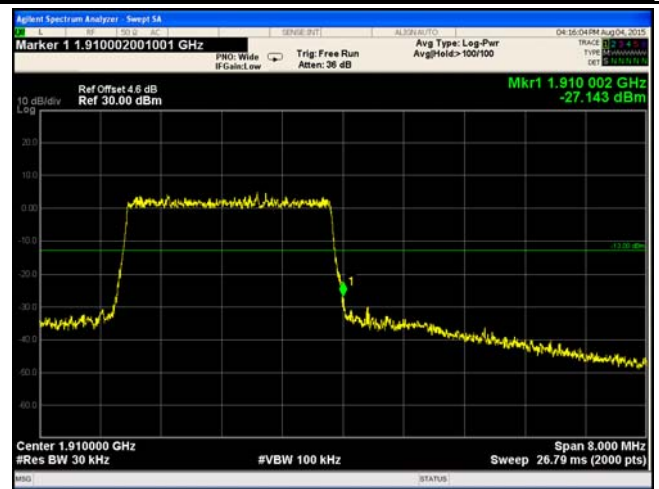


LTE Band 2 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.50/30)=4.5+0.1=4.6 dB

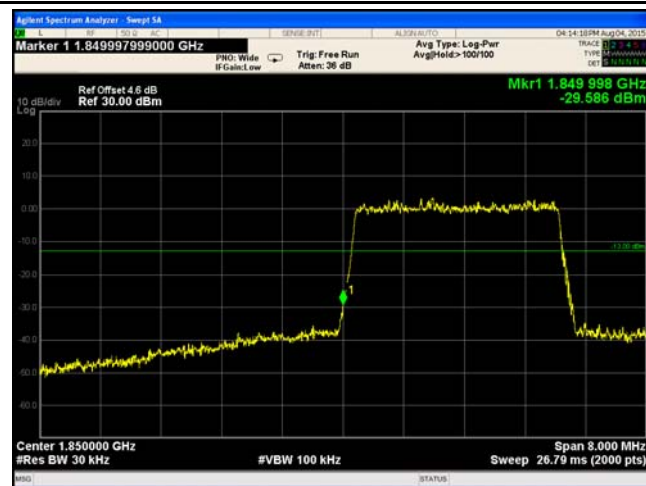


LTE Band 2 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.46/30)=4.5+0.1=4.6 dB

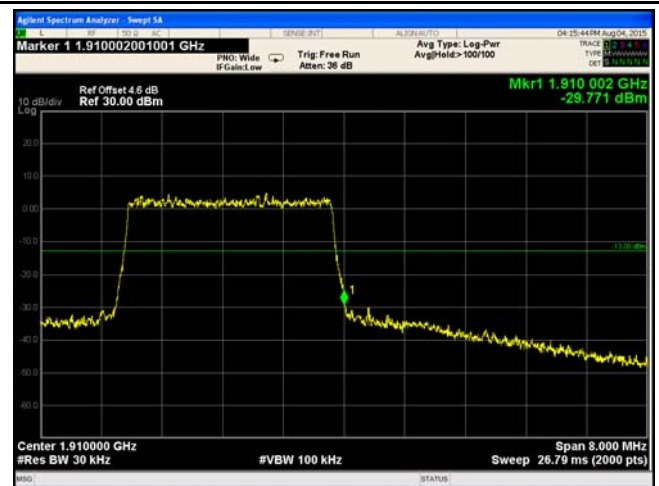

LTE Band 2 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.67/30)=4.5+0.1=4.6 dB

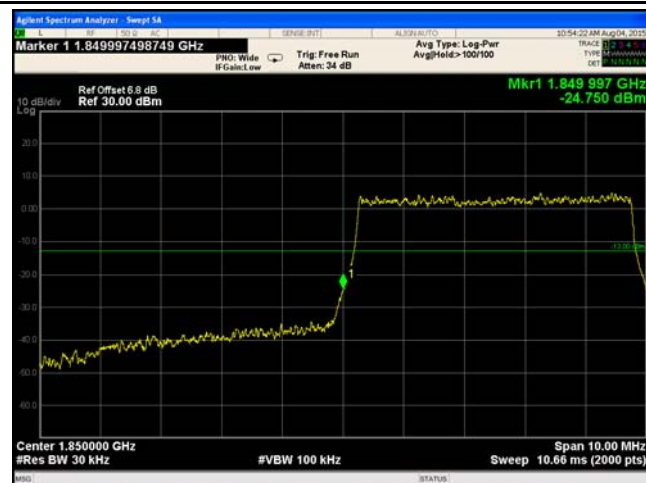


LTE Band 2 - Low Channel QPSK-5




LTE Band 2 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.76/30)=4.5+2.3=6.8 dB

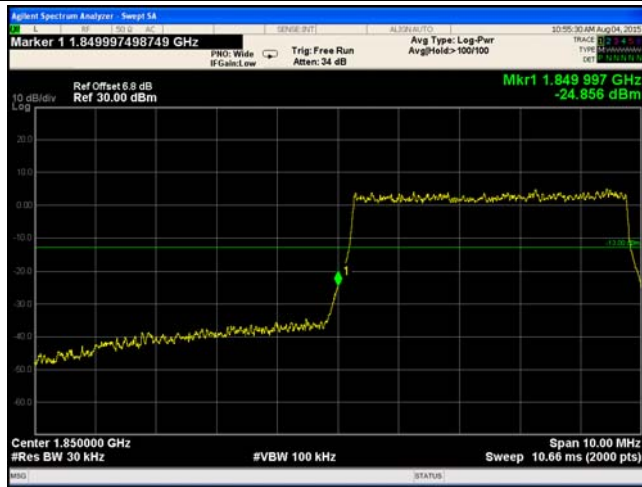


LTE Band 2 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.84/30)=4.5+2.3=6.8 dB

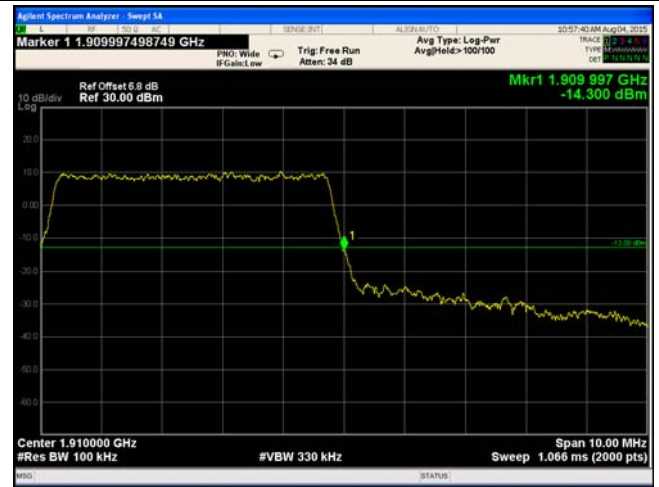

LTE Band 2 - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.75/30)=4.5+2.3=6.8 dB

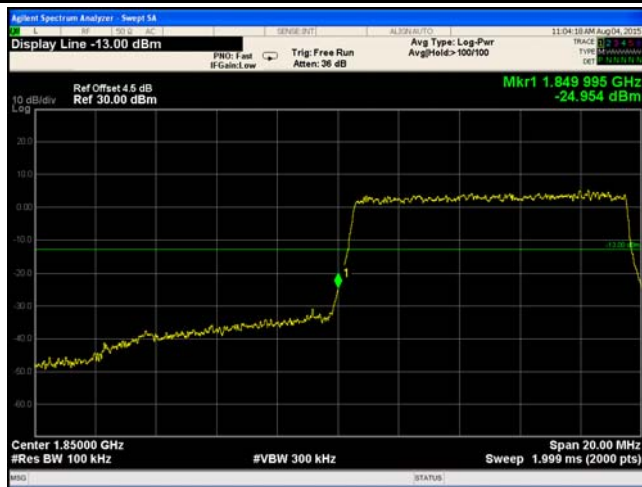


LTE Band 2 - Low Channel QPSK-10

Note: Offset=Cable loss (4.5) + 10log
(51.14/30)=4.5+2.3=6.8 dB



LTE Band 2 - High Channel QPSK-10

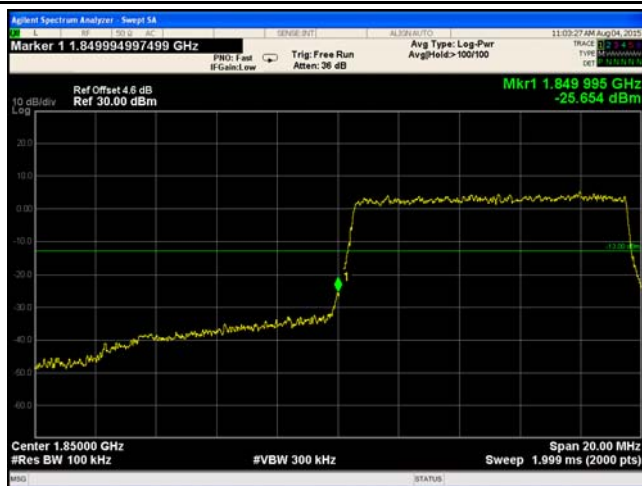


LTE Band 2 - Low Channel 16QAM-10




LTE Band 2 - High Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(101.8/100)=4.5+0.1=4.6 dB

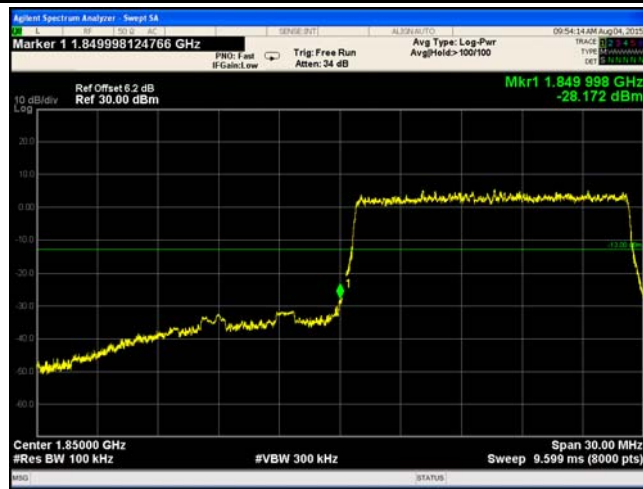

LTE Band 2 - Low Channel QPSK-15


Note: Offset=Cable loss (4.5) + 10log
(148.6/100)=4.5+1.7=6.2dB

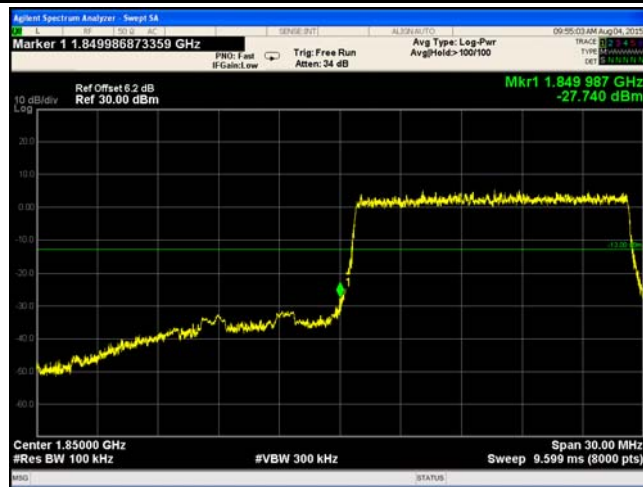

LTE Band 2 - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(148.4/100)=4.5+1.7=6.2 dB

Note: Offset=Cable loss (4.5) + 10log
(101.7/100)=4.5+0.1=4.6 dB

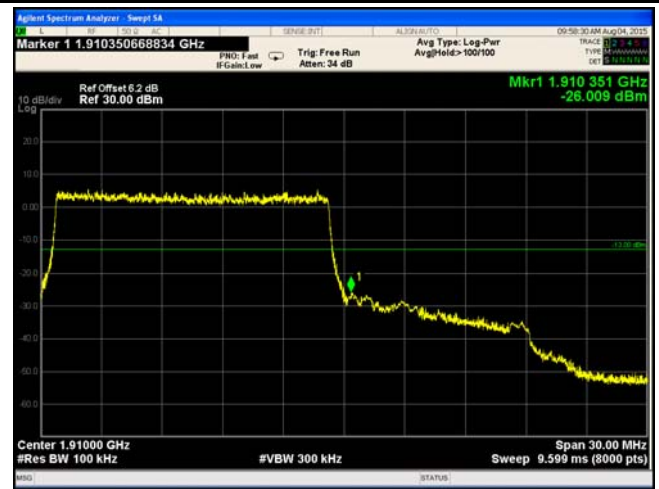


LTE Band 2 - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.1/100)=4.5+1.7=6.2 dB



LTE Band 2 - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(149.0/100)=4.5+1.7=6.2 dB

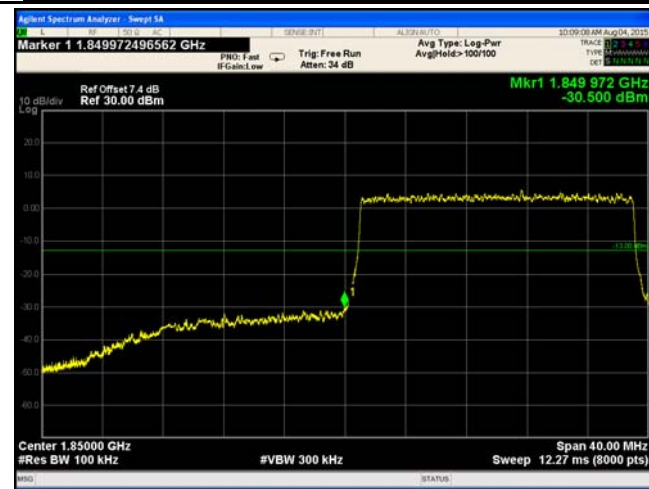


LTE Band 2 - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(194.8/100)=4.5+2.9=7.4dB




LTE Band 2 - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(196.4/100)=4.5+2.9=7.4 dB

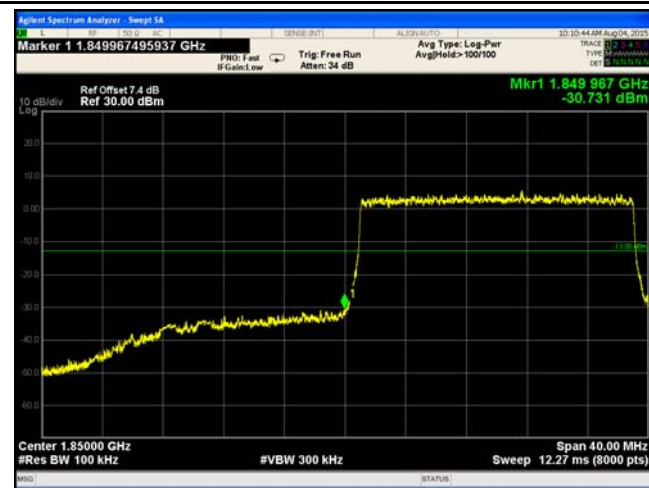

LTE Band 2 - Low Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(194.9/100)=4.5+2.9=7.4 dB

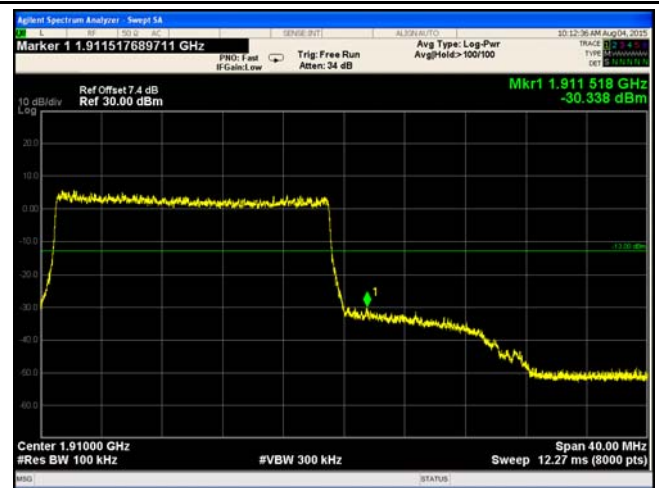

LTE Band 2 - High Channel 16QAM-20


Note: Offset=Cable loss (4.5) + 10log
(193.6/100)=4.5+2.9=7.4 dB

LTE Band 4 (Part 27)

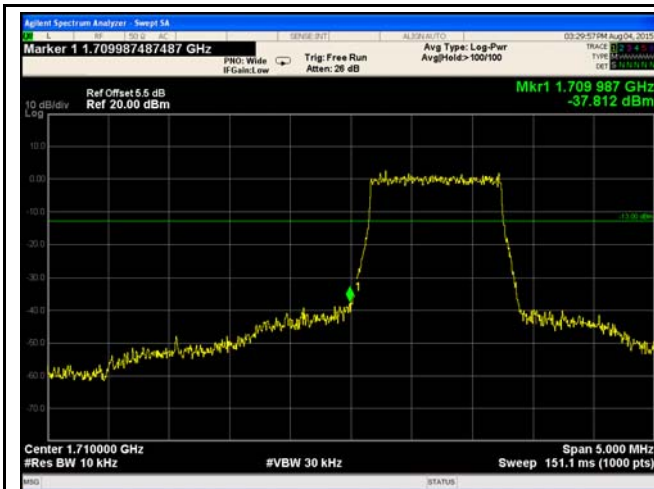


LTE Band 4 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.65/10)=4.5+1.0=5.5 dB

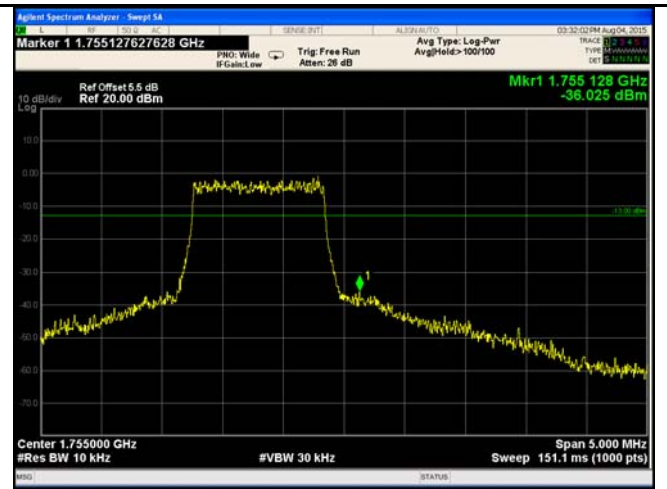


LTE Band 4 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.56/10)=4.5+1.0=5.5 dB

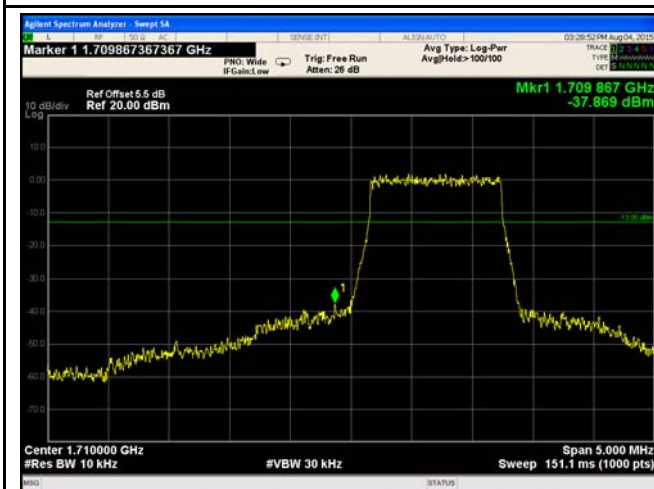

LTE Band 4 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.63/10)=4.5+1.0=5.5 dB

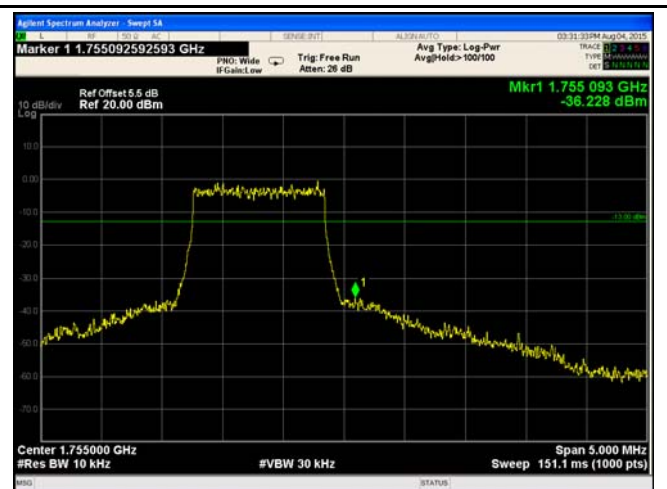

LTE Band 4 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.65/10)=4.5+1.0=5.5 dB




LTE Band 4 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.29/30)=4.5+0.1=4.6 dB




LTE Band 4 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.40/30)=4.5+0.1=4.6 dB

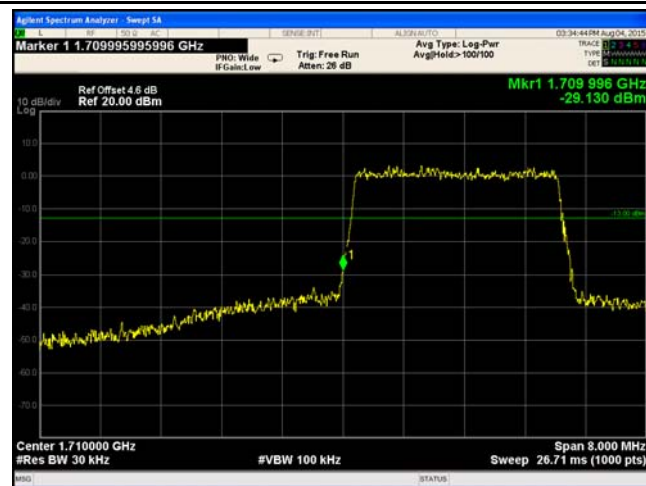


LTE Band 4 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.51/30)=4.5+0.1=4.6 dB

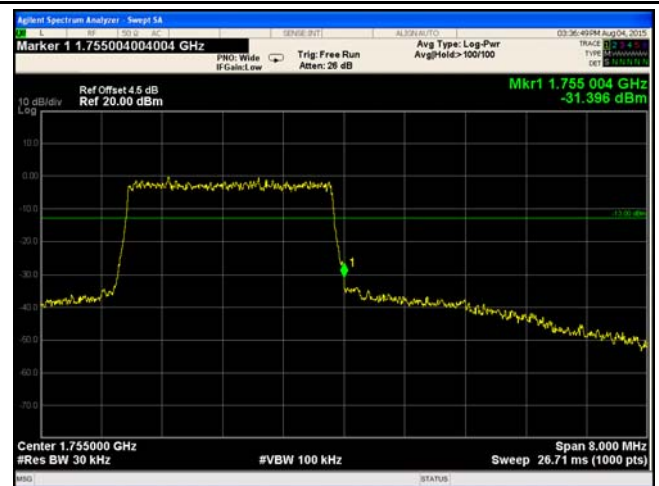

LTE Band 4 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(31.33/30)=4.5+0.0=4.5 dB

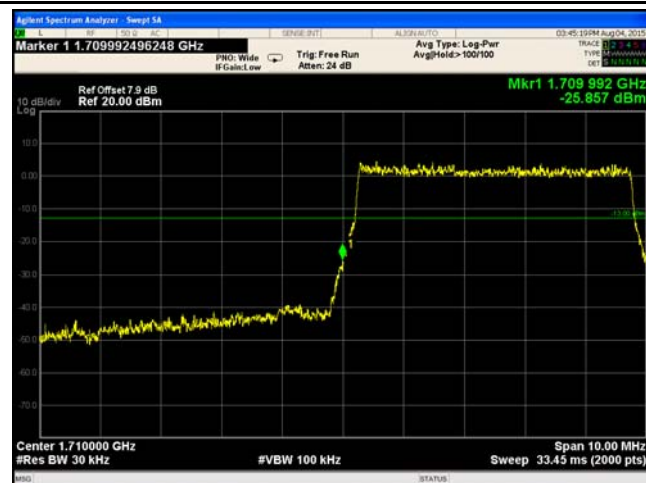


LTE Band 4 - Low Channel QPSK-5




LTE Band 4 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(65.29/30)=4.5+3.4=7.9 dB

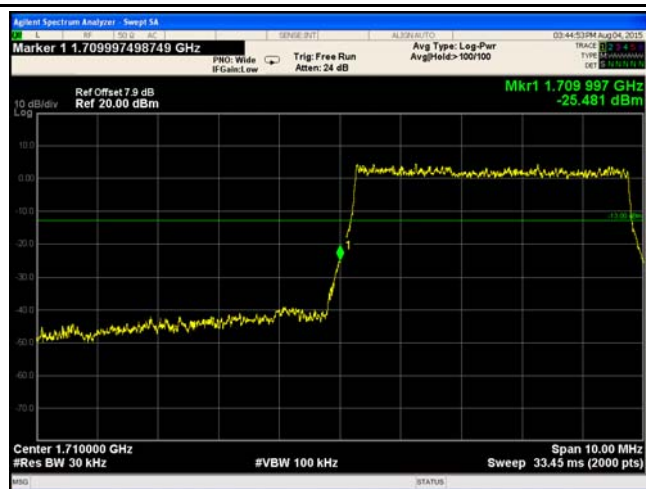


LTE Band 4 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(65.72/30)=4.5+3.4=7.9dB

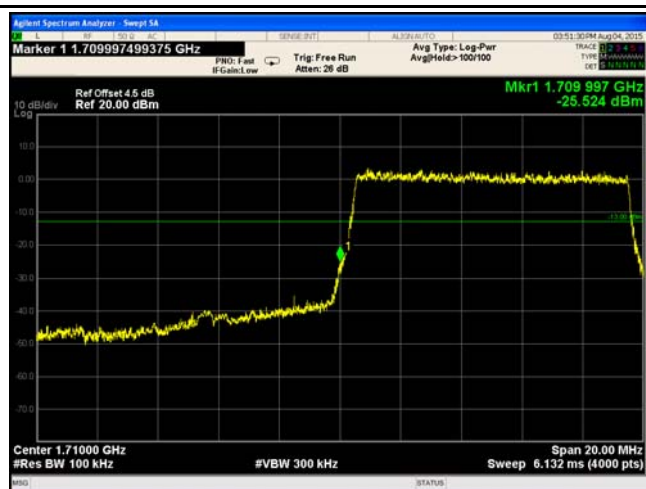

LTE Band 4 - Low Channel QPSK-10

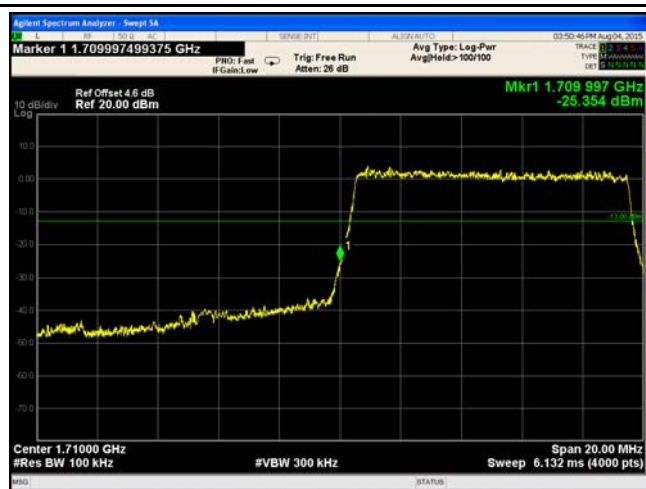

LTE Band 4 - Low Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(59.41/30)=4.5+3.0=7.5 dB



LTE Band 4 - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(62.55/30)=4.5+3.2=7.7 dB



LTE Band 4 - High Channel QPSK-10



LTE Band 4 - High Channel 16QAM-10

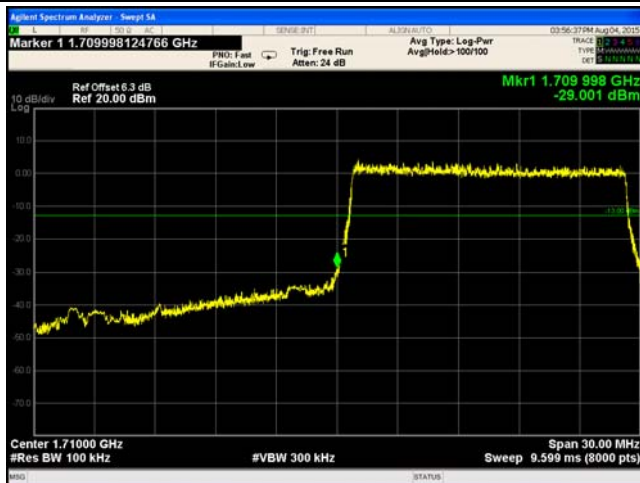


LTE Band 4 - Low Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(150.6/100)=4.5+1.8=6.3 dB



LTE Band 4 - High Channel QPSK-15

Note: Offset=Cable loss (4.5) + 10log
(148.1/100)=4.5+1.7=6.2 dB

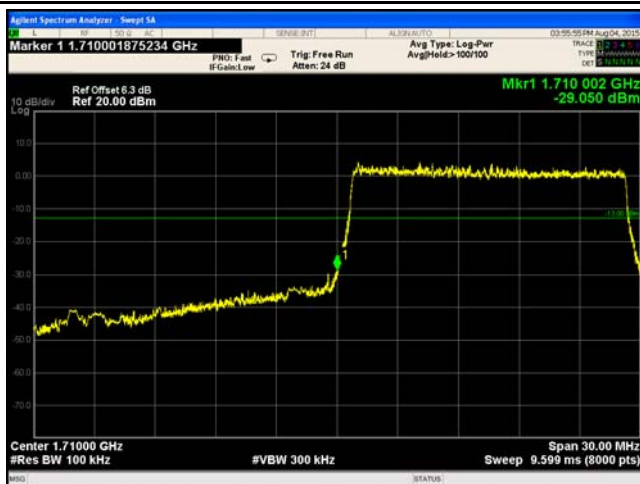


LTE Band 4 - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(149.7/100)=4.5+1.8=6.3 dB




LTE Band 4 - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(148.3/100)=4.5+1.7=6.2 dB

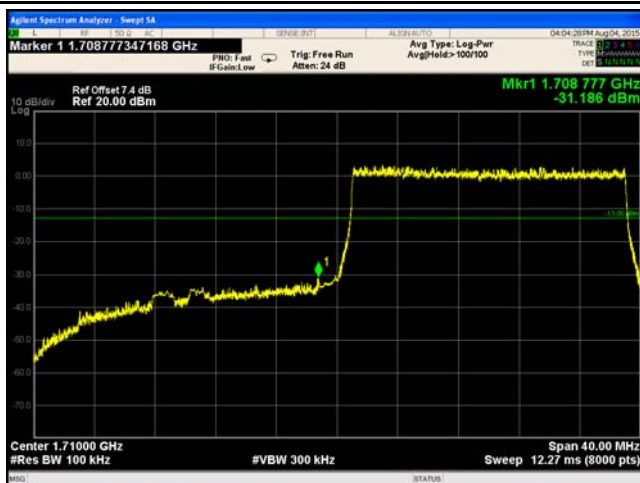


LTE Band 4 - Low Channel QPSK-20

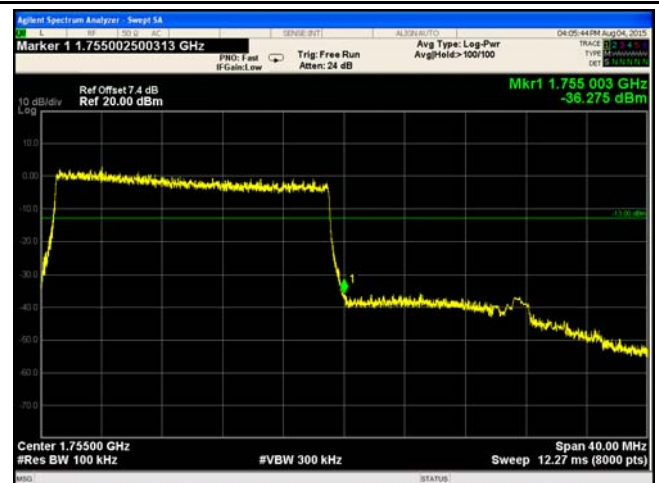

LTE Band 4 - High Channel QPSK-20

Test Report	15070591-FCC-R5
Page	118 of 149


Note: Offset=Cable loss (4.5) + 10log
(193.7/100)=4.5+2.9=7.4 dB

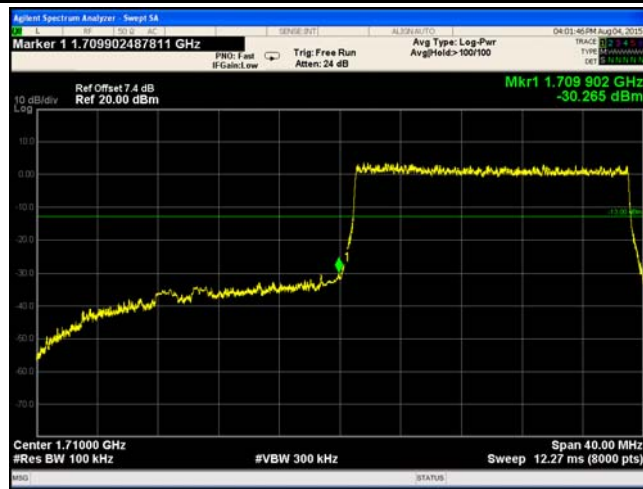

LTE Band 4 - Low Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(194.6/100)=4.5+2.9=7.4 dB


Note: Offset=Cable loss (4.5) + 10log
(192.9/100)=4.5+2.9=7.4 dB

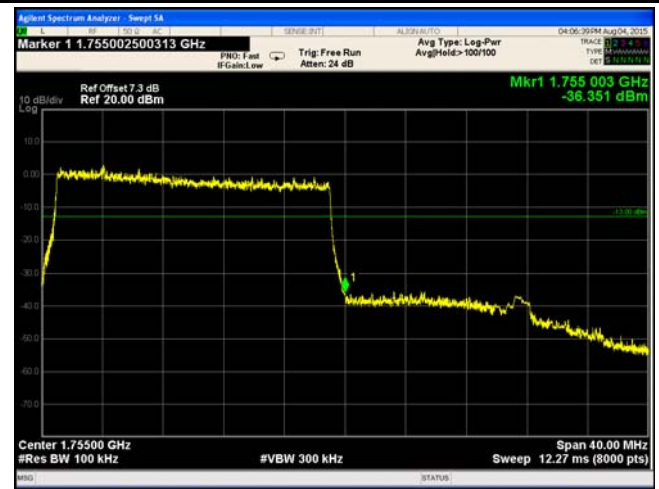

LTE Band 4 - High Channel 16QAM-20

Note: Offset=Cable loss (4.5) + 10log
(190.9/100)=4.5+2.8=7.3 dB

LTE Band 5 (Part 22H)

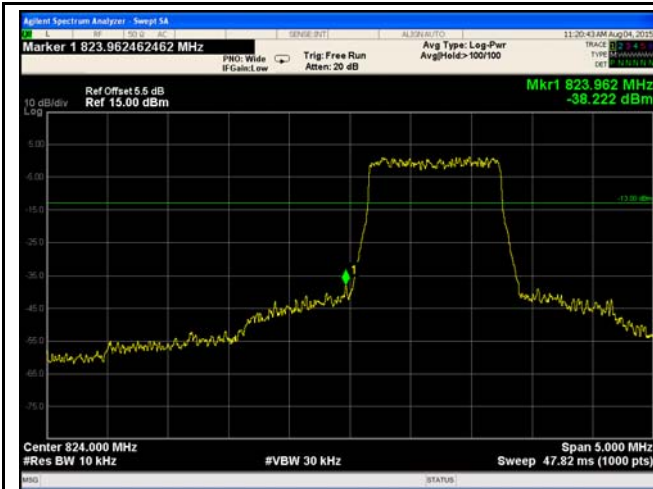


LTE Band 5 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.68/10)=4.5+1.0=5.5 dB




LTE Band 5 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.53/10)=4.5+1.0=5.5 dB

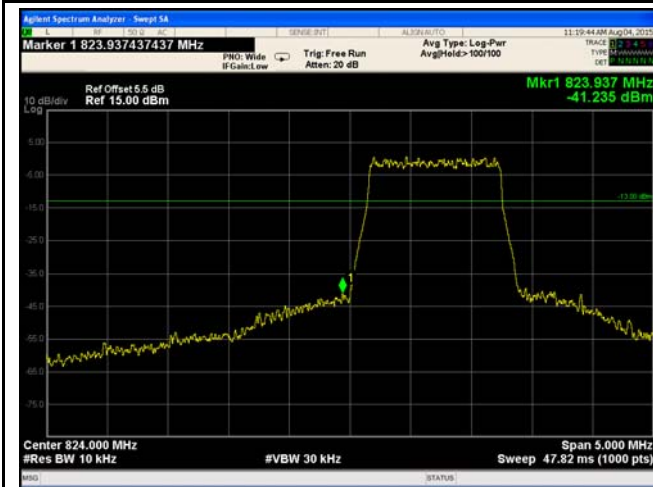

LTE Band 5 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.68/10)=4.5+1.0=5.5 dB

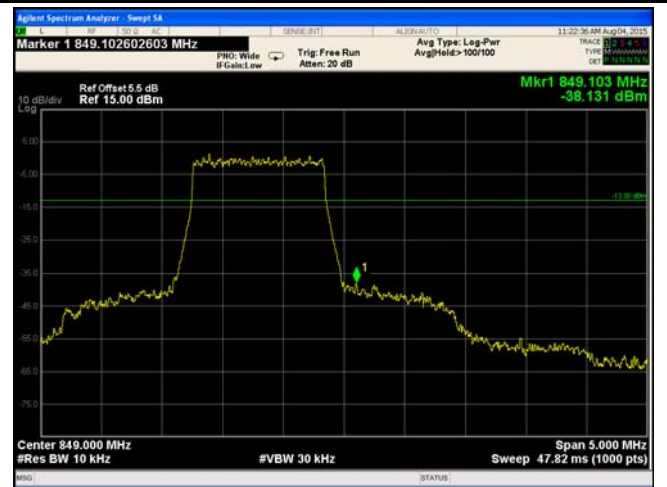


LTE Band 5 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.60/10)=4.5+1.0=5.5 dB



LTE Band 5 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.29/30)=4.5+0.0=4.5 dB

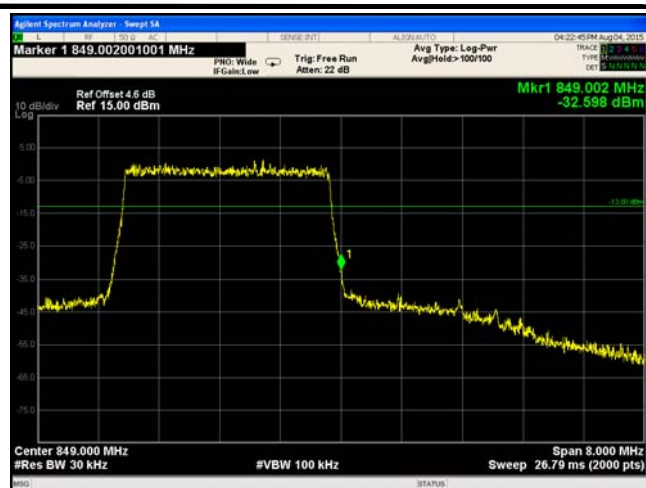

LTE Band 5 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.45/30)=4.5+0.1=4.6 dB



LTE Band 5 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.02/30)=4.5+0.0=4.5 dB



LTE Band 5 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(31.50/30)=4.5+0.1=4.6 dB




LTE Band 5 - Low Channel QPSK-5




LTE Band 5 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.36/30)=4.5+2.2=6.7 dB

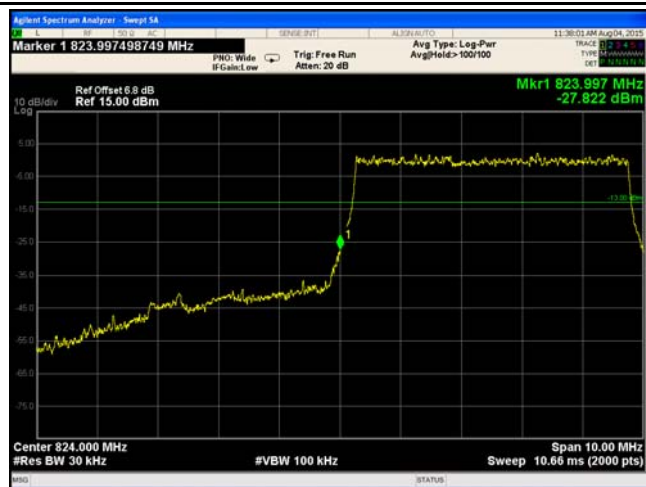


LTE Band 5 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.38/30)=4.5+2.3=6.8 dB

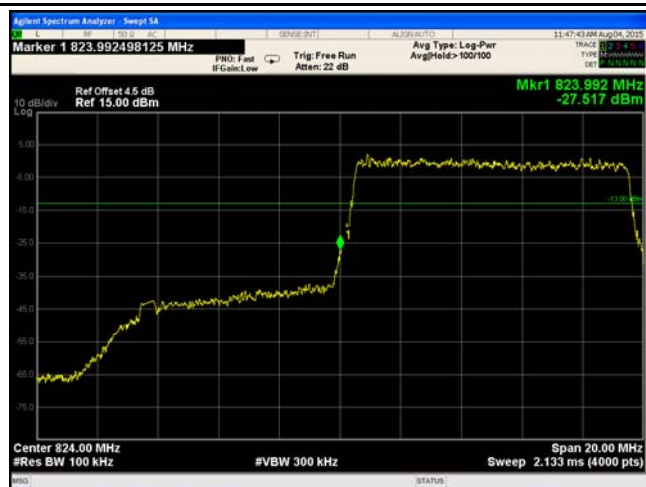

LTE Band 5 - Low Channel QPSK-10

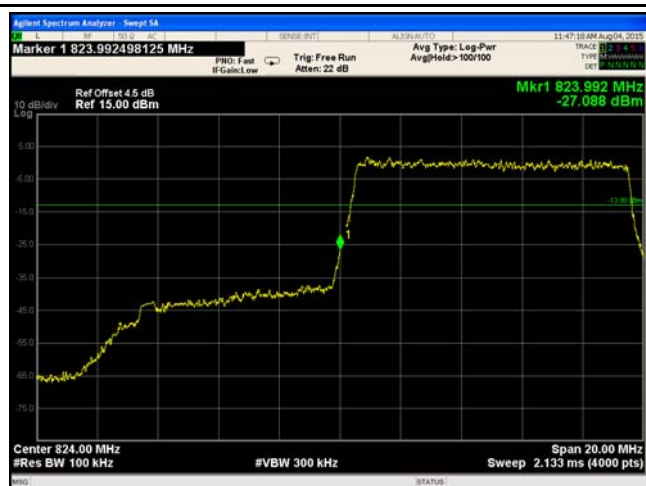

LTE Band 5 - Low Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(50.22/30)=4.5+2.2=6.7 dB



LTE Band 5 - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(49.84/30)=4.5+2.2=6.7 dB




LTE Band 5 - High Channel QPSK-10




LTE Band 5 - High Channel 16QAM-10

LTE Band 12 (Part 27)

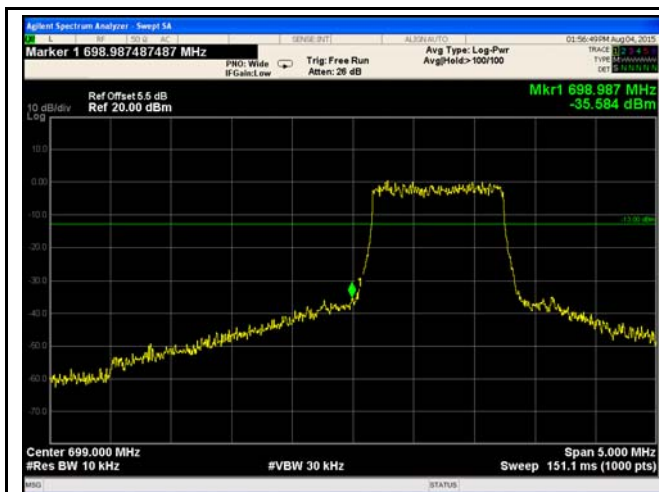


LTE Band 12 - Low Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.73/10)=4.5+1.0=5.6 dB

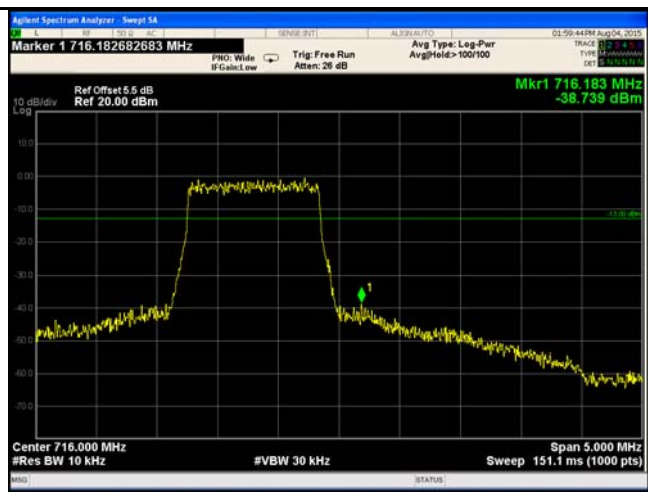


LTE Band 12 - High Channel QPSK-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.61/10)=4.5+1.0=5.5 dB

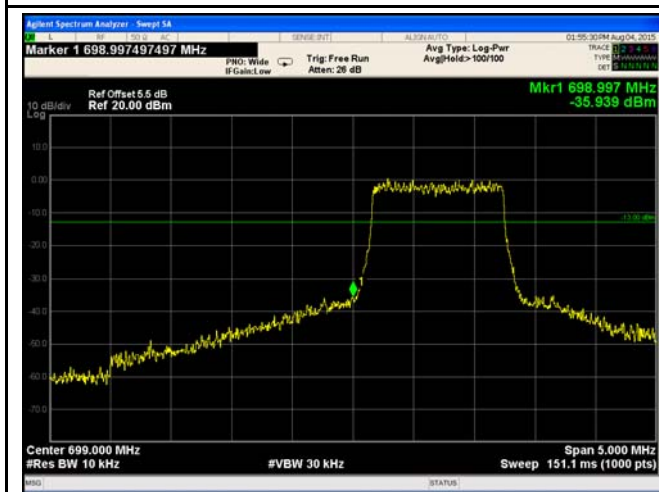


LTE Band 12 - Low Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.65/10)=4.5+1.0=5.5 dB

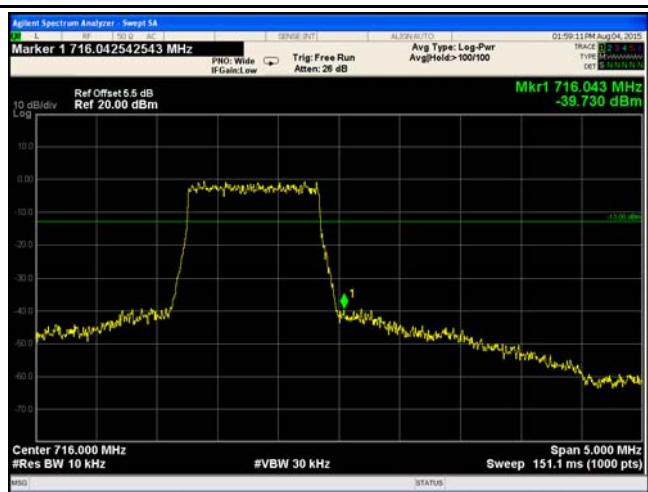


LTE Band 12 - High Channel 16QAM-1.4

Note: Offset=Cable loss (4.5) + 10log
(12.56/10)=4.5+1.0=5.5 dB

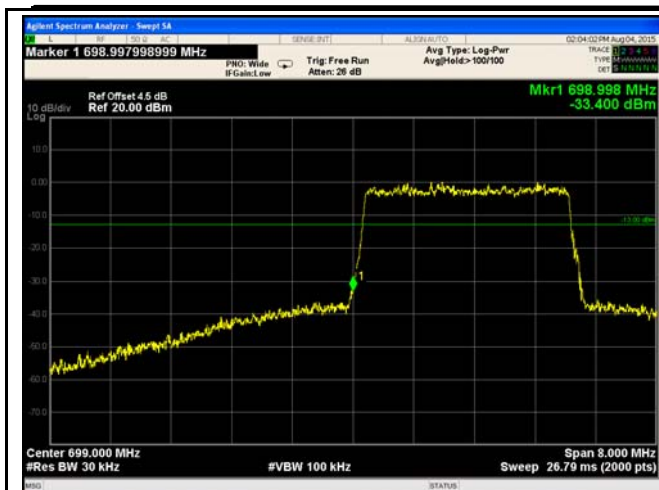

LTE Band 12 - Low Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.10/30)=4.5+0.0=4.5 dB

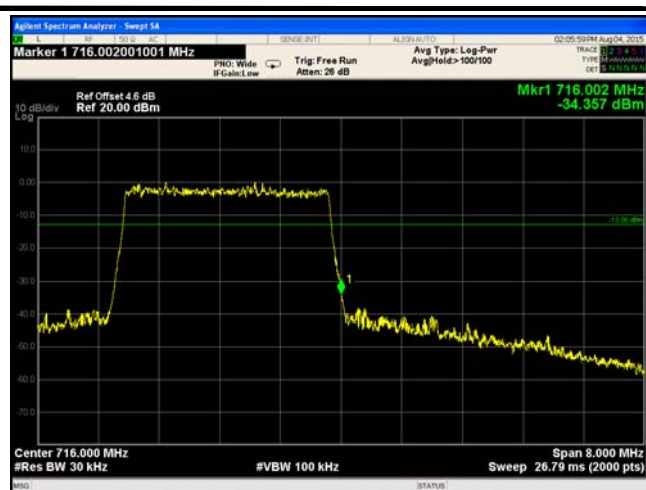


LTE Band 12 - High Channel QPSK-3

Note: Offset=Cable loss (4.5) + 10log
(30.35/30)=4.5+0.1=4.6 dB




LTE Band 12 - Low Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.26/30)=4.5+0.0=4.5 dB

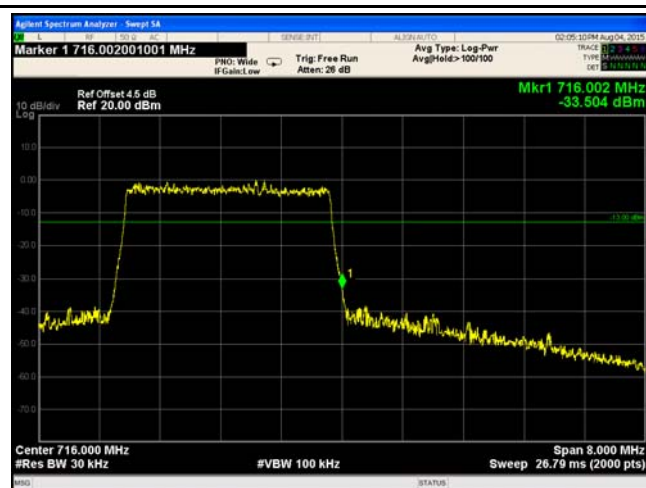


LTE Band 12 - High Channel 16QAM-3

Note: Offset=Cable loss (4.5) + 10log
(30.34/30)=4.5+0.0=4.5 dB

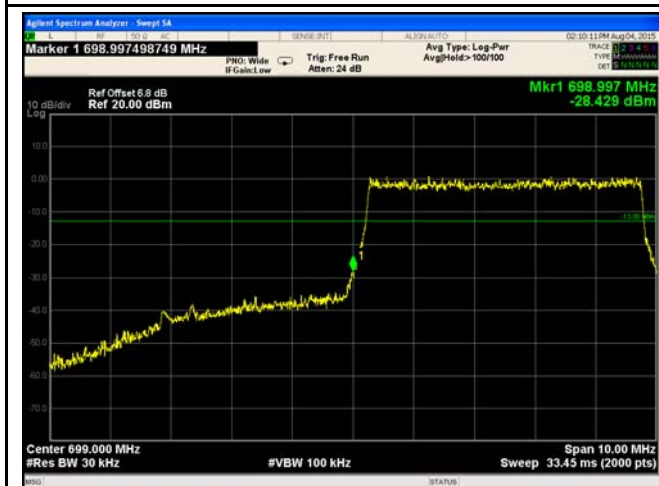


LTE Band 12 - Low Channel QPSK-5

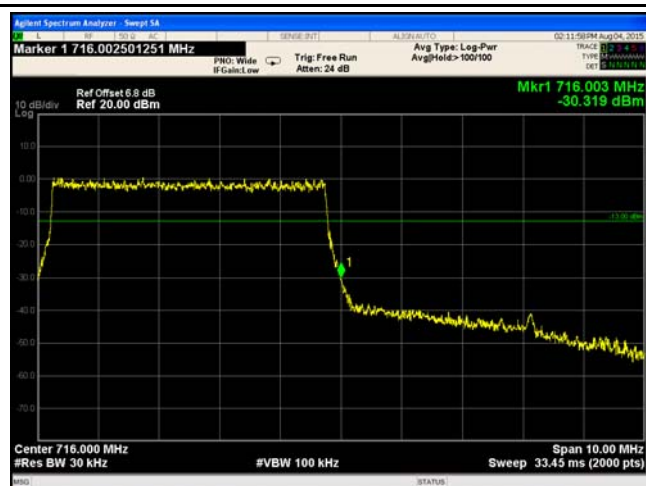


LTE Band 12 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.49/30)=4.5+2.3=6.8 dB

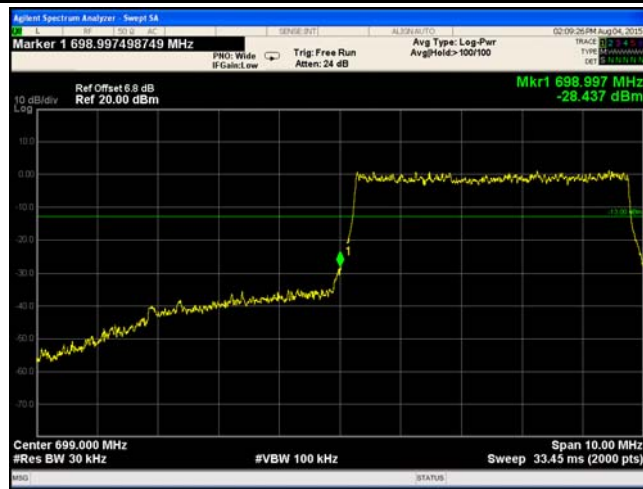


LTE Band 12 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.94/30)=4.5+2.3=6.8 dB

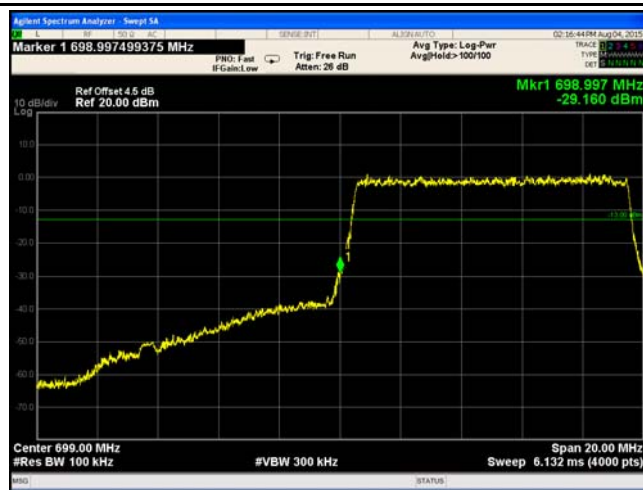

LTE Band 12 - Low Channel QPSK-10

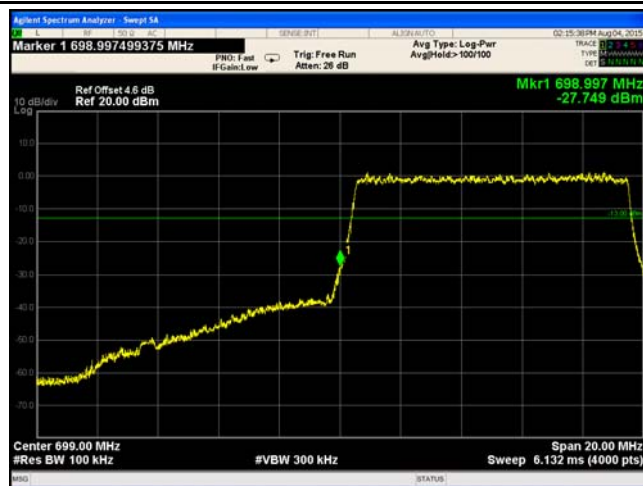


LTE Band 12 - Low Channel 16QAM-10

Note: Offset=Cable loss (4.5) + 10log
(50.58/30)=4.5+2.3=6.8 dB



LTE Band 12 - High Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(51.39/30)=4.5+2.3=6.8 dB

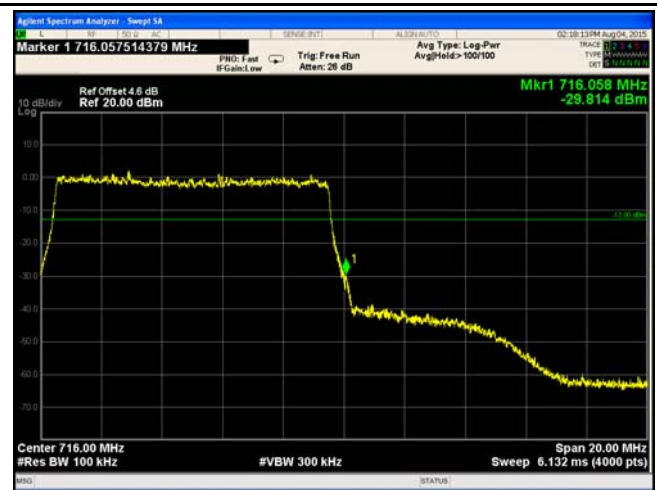


LTE Band 12 - High Channel QPSK-10




LTE Band 12 - High Channel 16QAM-10

LTE Band 17 (Part 27)

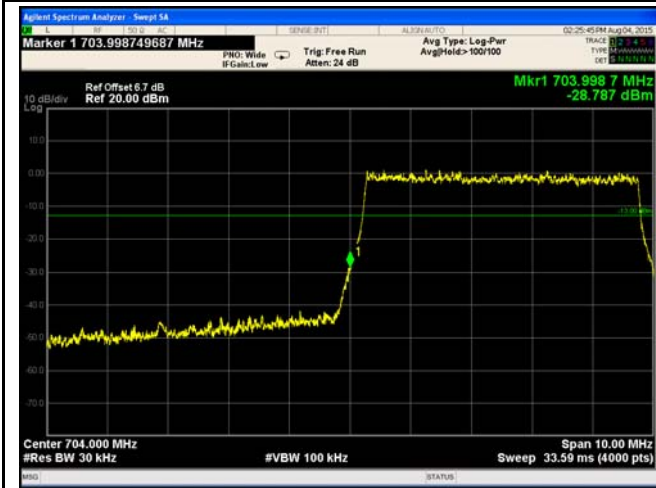


LTE Band 17 - Low Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.08/30)=4.5+2.2=6.7 dB

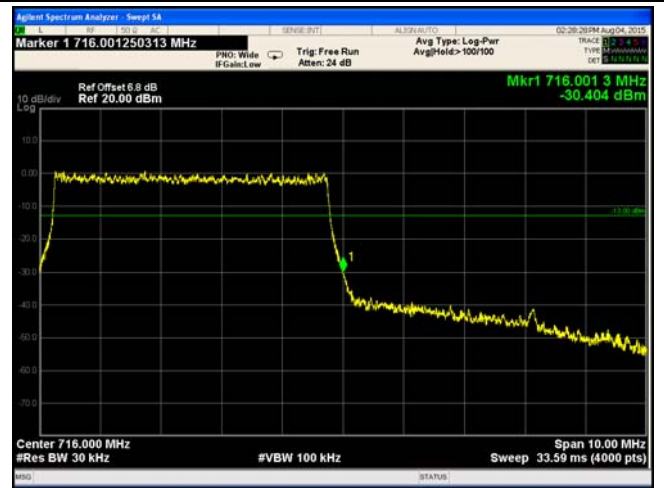


LTE Band 17 - High Channel QPSK-5

Note: Offset=Cable loss (4.0) + 10log
(50.60/30)=4.5+2.3=6.8 dB

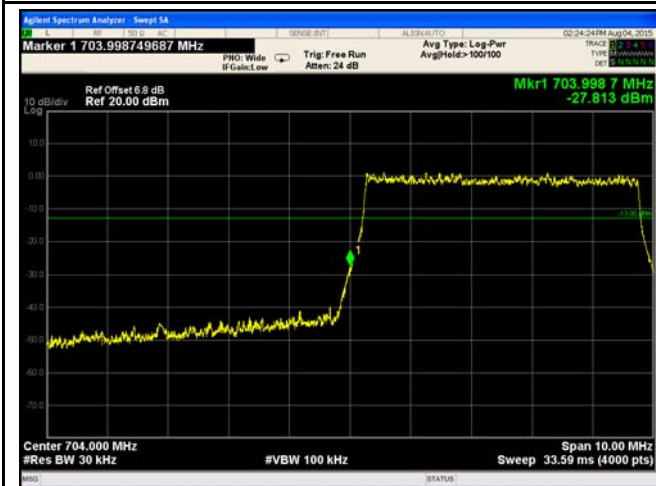


LTE Band 17 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.0) + 10log
(50.69/30)=4.5+2.3=6.8 dB

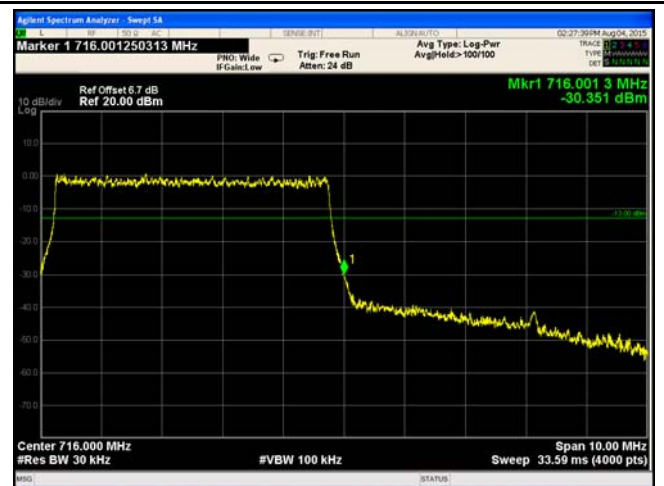

LTE Band 17 - High Channel 16QAM-5


Note: Offset=Cable loss (4.0) + 10log
(50.17/30)=4.5+2.2=6.7 dB

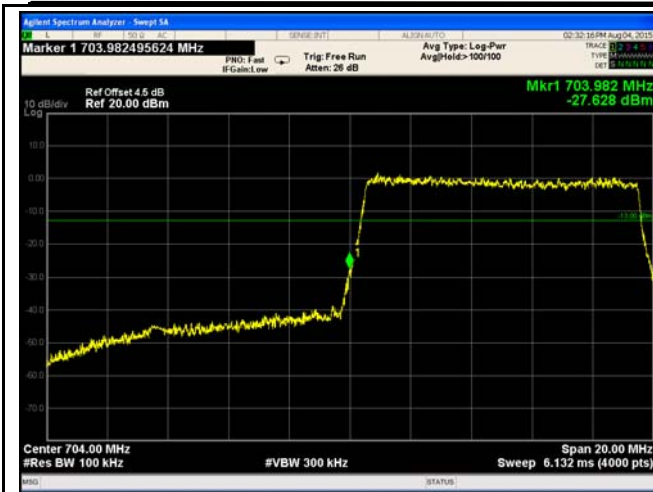


LTE Band 17 - Low Channel QPSK-10



LTE Band 17 - High Channel QPSK-10

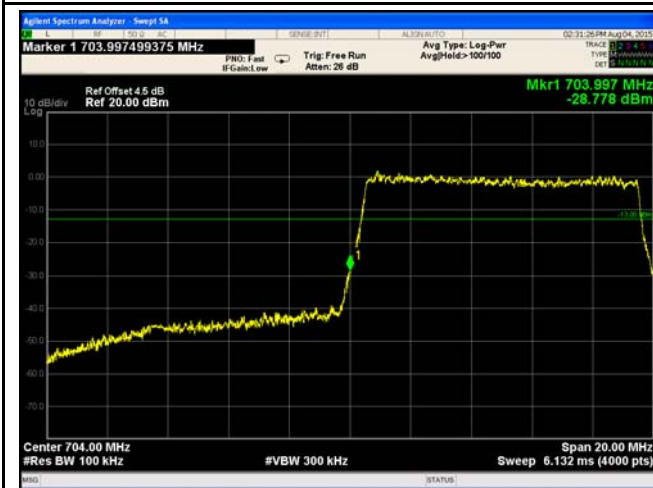

LTE Band 17 - Low Channel 16QAM-10

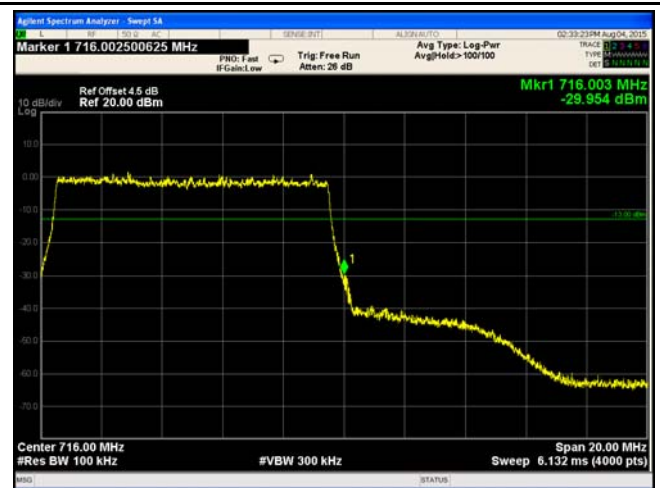


LTE Band 17 - High Channel 16QAM-10

6.9 Band Edge 27.53(m)

Temperature	22°C
Relative Humidity	57%
Atmospheric Pressure	1005mbar
Test date :	August 05, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Requirement	Applicable
§27.53(m)	According to FCC 27.53(m)(4) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power(P) by a factor shall be not less than $43+10\log(P)$ dB at the channel edge, the limit of emission equal to -13dBm. And $55+10\log(P)$ dB at 5.5MHz from the channel edges, the limit of emission equal to -25dBm. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.	☒
Test Setup	 Base Station Spectrum Analyzer EUT	
Test Procedure	- The EUT was connected to Spectrum Analyzer and Base Station via power divider. - The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.	
Remark		
Result	☒ Pass ☐ Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

LTE Band 7 (Part 27) result


BW(MHz)	Channel	Frequency (MHz)	Mode	Emission (dBm)	Limit (dBm)
5	20775	2502.5	QPSK	-23.638	-13
			16QAM	-24.529	-13
5	21425	2567.5	QPSK	-24.063	-13
			16QAM	-22.212	-13
10	20800	2505	QPSK	-24.361	-13
			16QAM	-24.212	-13
10	21400	2562.5	QPSK	-23.266	-13
			16QAM	-21.934	-13
15	20825	2507.5	QPSK	-23.779	-13
			16QAM	-24.088	-13
15	21400	2562.5	QPSK	-24.420	-13
			16QAM	-26.129	-13
20	20850	2510	QPSK	-29.917	-13
			16QAM	-29.193	-13
20	21350	2560	QPSK	-29.190	-13
			16QAM	-28.352	-13

LTE Band 7 (Part 27)

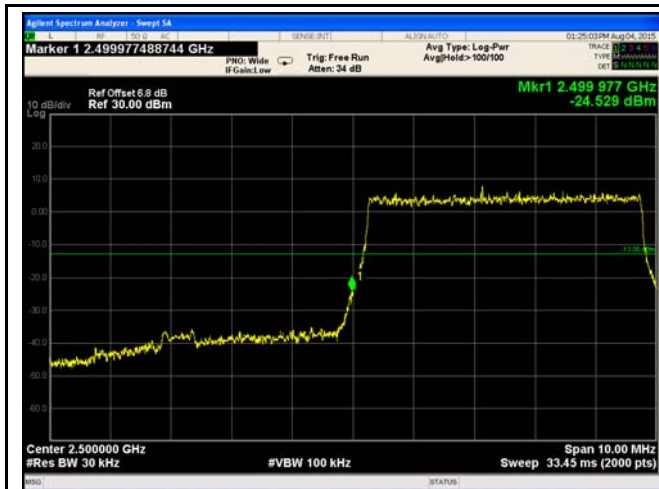


LTE Band 7 - Low Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.5/30)=4.5+2.3=6.8 dB

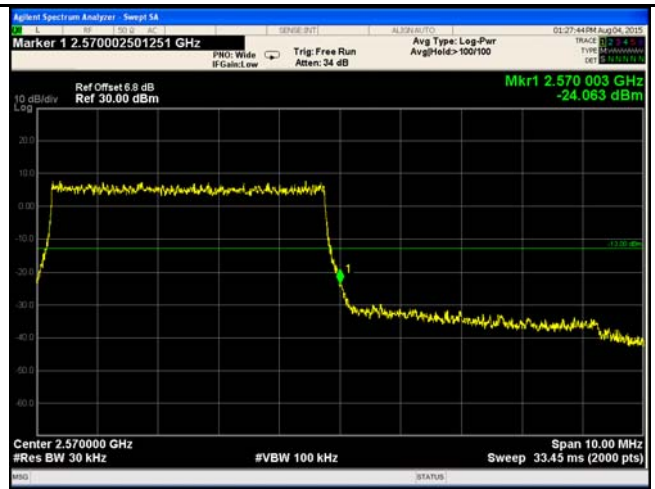


LTE Band 7 - High Channel QPSK-5

Note: Offset=Cable loss (4.5) + 10log
(50.8/30)=4.5+2.3=6.8 dB

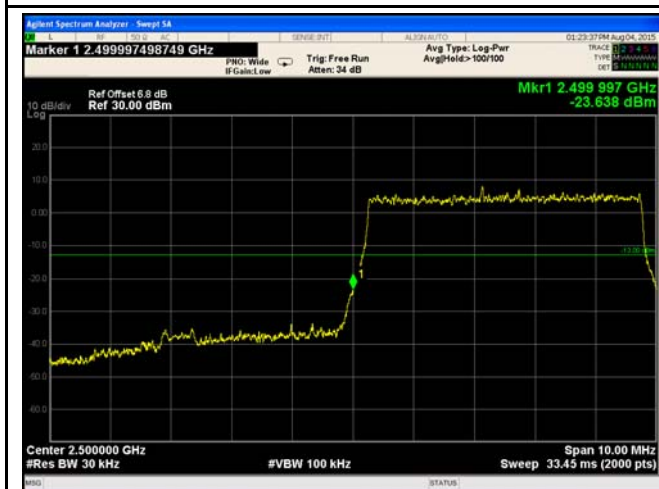


LTE Band 7 - Low Channel 16QAM-5

Note: Offset=Cable loss (4.5) + 10log
(50.5/30)=4.5+2.3=6.8 dB

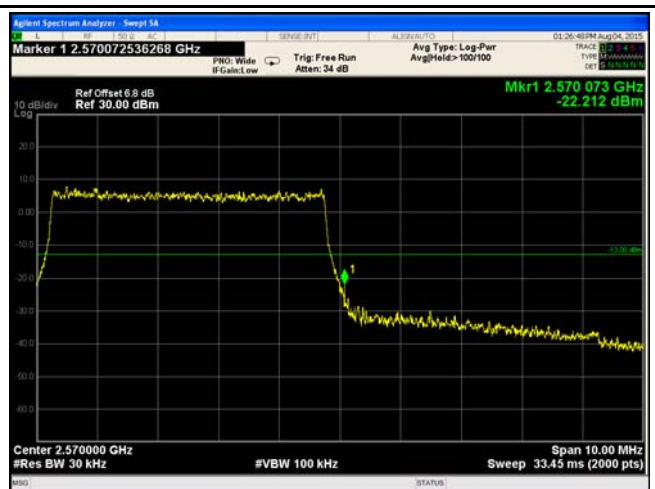


LTE Band 7 - High Channel 16QAM-5


Note: Offset=Cable loss (4.5) + 10log
(50.4/30)=4.5+2.3=6.8 dB

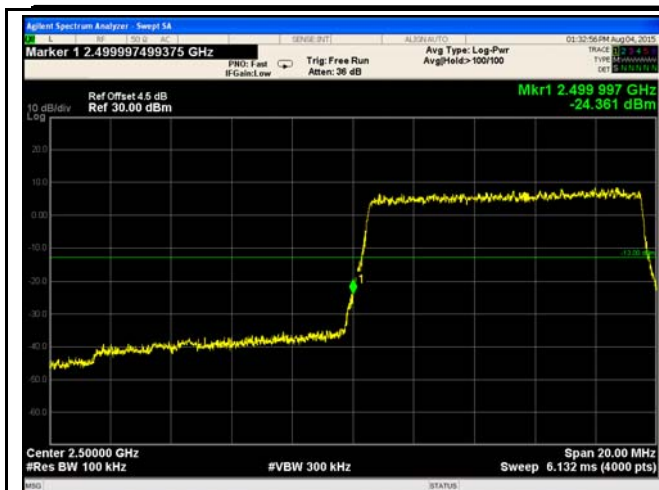

LTE Band 7 - Low Channel QPSK-10

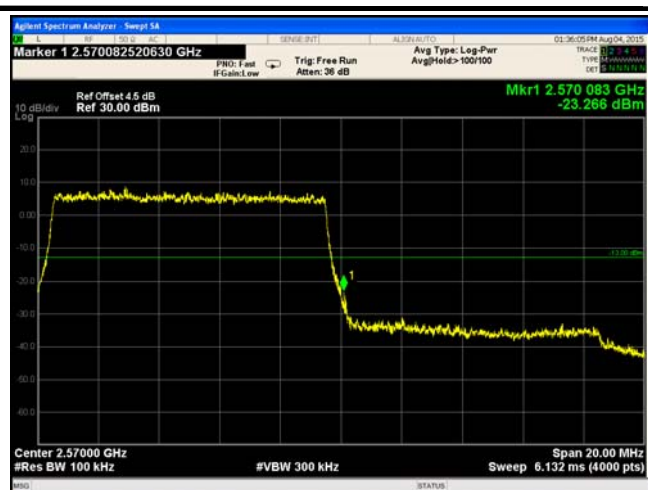


LTE Band 7 - High Channel QPSK-10

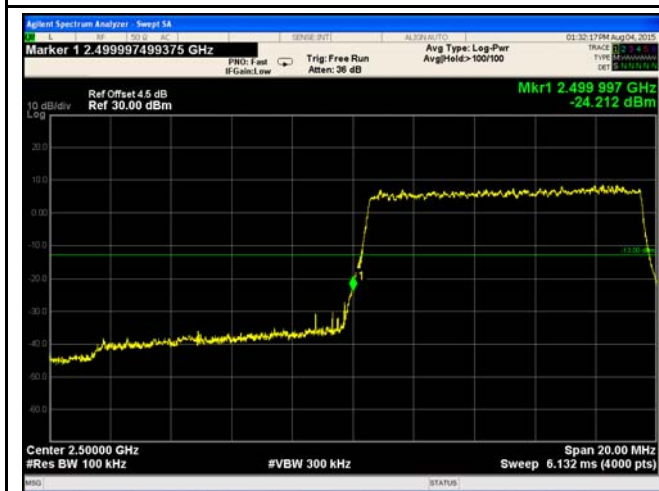


LTE Band 7 - Low Channel 16QAM-10



LTE Band 7 - High Channel 16QAM-10

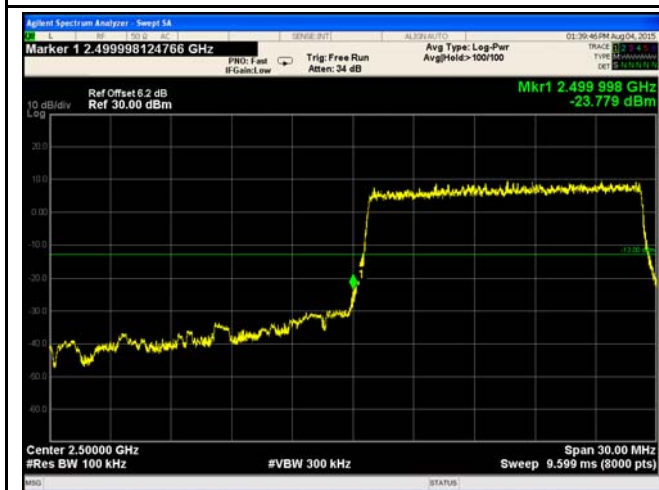

LTE Band 7 - Low Channel QPSK-15

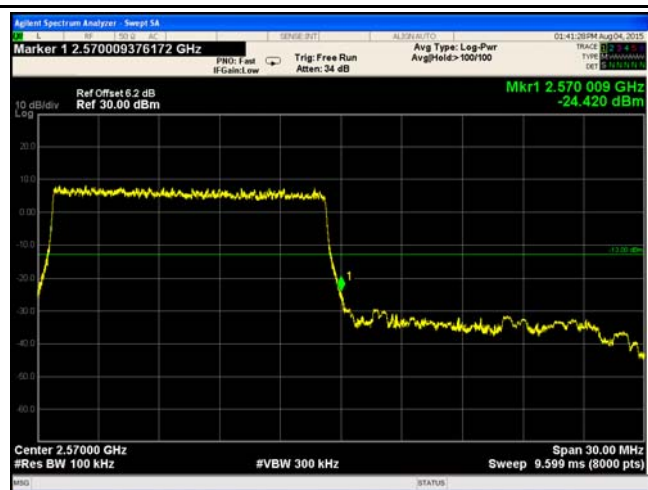

LTE Band 7 - High Channel QPSK-15


Note: Offset=Cable loss (4.5) + 10log
(148.5/100)=4.5+1.7=6.2 dB

Note: Offset=Cable loss (4.5) + 10log
(147.4/100)=4.5+1.7=6.2 dB




LTE Band 7 - Low Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(147.2/100)=4.5+1.7=6.2 dB

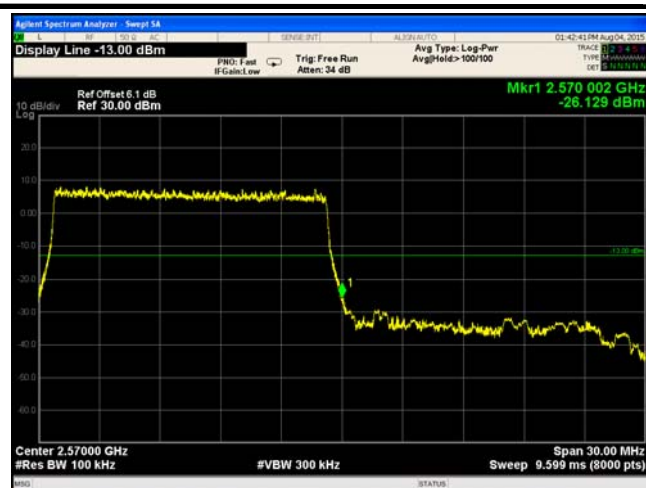


LTE Band 7 - High Channel 16QAM-15

Note: Offset=Cable loss (4.5) + 10log
(146.0/100)=4.5+1.6=6.1 dB

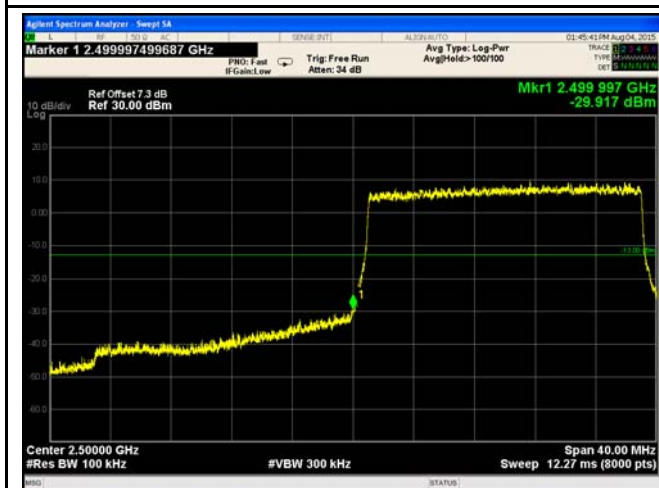


LTE Band 7 - Low Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(191.4/100)=4.5+2.8=7.3dB

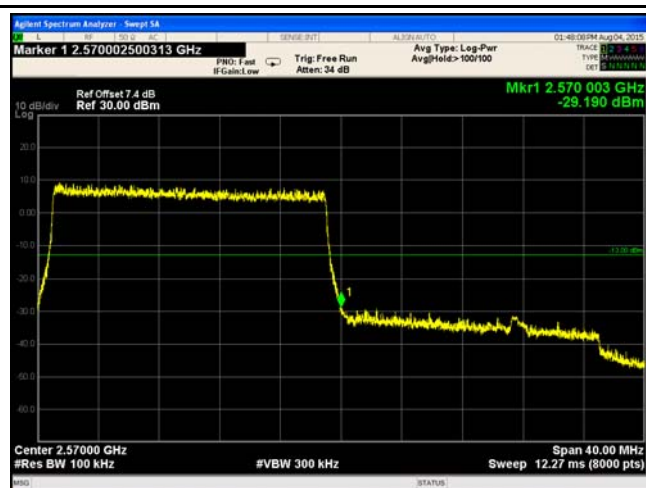


LTE Band 7 - High Channel QPSK-20

Note: Offset=Cable loss (4.5) + 10log
(192.9/100)=4.5+2.9=7.4dB

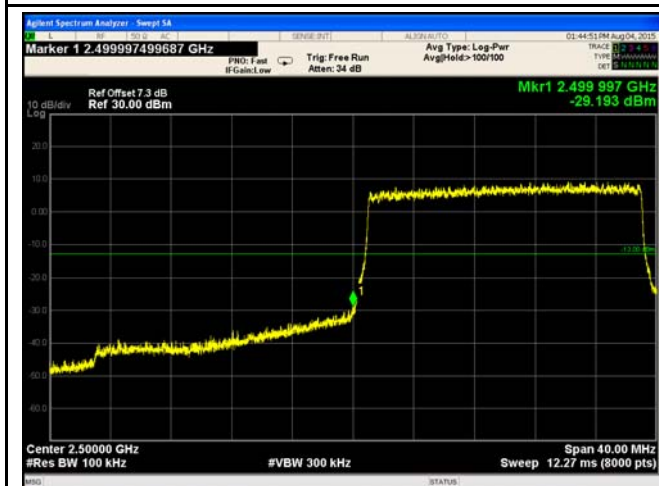

LTE Band 7 - Low Channel 16QAM-20

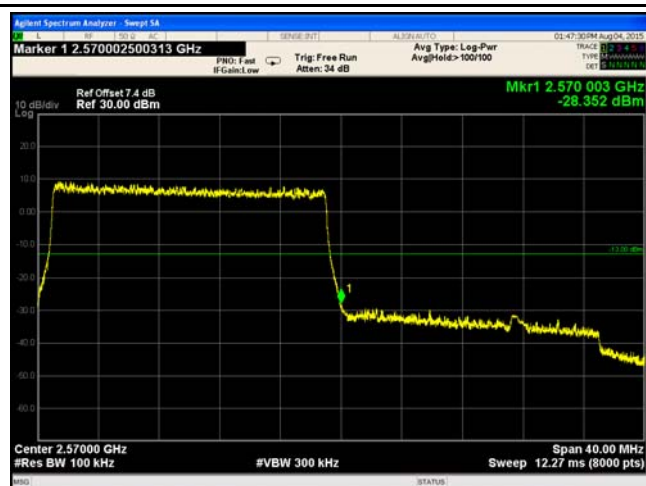

LTE Band 7 - High Channel 16QAM-20

Test Report	15070591-FCC-R5
Page	132 of 149

Note: Offset=Cable loss (4.5) + 10log
(190.9/100)=4.5+2.8=7.3 dB


Note: Offset=Cable loss (4.5) + 10log
(193.2/100)=4.5+2.9=7.4 dB

6.10 Frequency Stability

Temperature	24°C
Relative Humidity	56%
Atmospheric Pressure	1004mbar
Test date :	August 04, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable																																
§2.1055, §22.355 & §24.235 § 27.5(h); § 27.54	a)	According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th><th>Mobile ≤ 3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20.0</td><td>20.0</td><td>50.0</td></tr> <tr> <td>to 450</td><td>5.0</td><td>5.0</td><td>50.0</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5.0</td><td>5 0</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929.</td><td>5.0</td><td>N/A</td><td>N/A</td></tr> <tr> <td>929 to 960.</td><td>1.5</td><td>N/A</td><td>N/A</td></tr> <tr> <td>2110 to 2220</td><td>10.0</td><td>N/A</td><td>N/A</td></tr> </tbody> </table> According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block. According to §27.54, The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)	25 to 50	20.0	20.0	50.0	to 450	5.0	5.0	50.0	450 to 512	2.5	5.0	5 0	821 to 896	1.5	2.5	2.5	928 to 929.	5.0	N/A	N/A	929 to 960.	1.5	N/A	N/A	2110 to 2220	10.0	N/A	N/A	☒
Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)																																
25 to 50	20.0	20.0	50.0																																
to 450	5.0	5.0	50.0																																
450 to 512	2.5	5.0	5 0																																
821 to 896	1.5	2.5	2.5																																
928 to 929.	5.0	N/A	N/A																																
929 to 960.	1.5	N/A	N/A																																
2110 to 2220	10.0	N/A	N/A																																

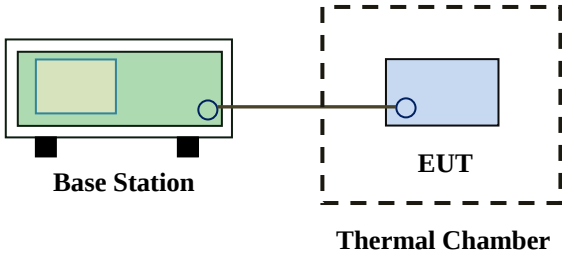Test setup	 Base Station EUT Thermal Chamber
Procedure	A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage. Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.
Remark	Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to $+55^{\circ}\text{C}$ at normal supply voltage.
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

LTE Band 2 (Part 24E) result

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-7	0.0037	2.5
0		-8	0.0043	2.5
10		-7	0.0037	2.5
20		-10	0.0053	2.5
30		-9	0.0048	2.5
40		-7	0.0037	2.5
50		-12	0.0064	2.5
55		-6	0.0032	2.5
25	4.2	-9	0.0048	2.5
	3.5	-12	0.0064	2.5

LTE Band 4 (Part 27) result

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-13	0.0075	2.5
0		-16	0.0092	2.5
10		-11	0.0063	2.5
20		-11	0.0063	2.5
30		-10	0.0058	2.5
40		-12	0.0069	2.5
50		-14	0.0081	2.5
55		-15	0.0087	2.5
25	4.2	-17	0.0098	2.5
	3.5	-16	0.0092	2.5

LTE Band 5 (Part 22H) result

Middle Channel, $f_0 = 1732.5$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	6	0.0072	2.5
0		3	0.0036	2.5
10		7	0.0084	2.5
20		8	0.0096	2.5
30		11	0.0132	2.5
40		9	0.0108	2.5
50		11	0.0132	2.5
55		7	0.0084	2.5
25	4.2	5	0.0060	2.5
	3.5	9	0.0108	2.5

LTE Band 7 (Part 27) result

Middle Channel, $f_0 = 2535$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	-11	0.0059	2.5
0		-7	0.0037	2.5
10		-12	0.0064	2.5
20		-11	0.0059	2.5
30		-9	0.0048	2.5
40		-7	0.0037	2.5
50		-11	0.0059	2.5
55		-10	0.0053	2.5
25	4.2	-12	0.0064	2.5
	3.5	-11	0.0059	2.5

LTE Band 12 (Part 27) result

Middle Channel, $f_0 = 707.5\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	9	0.0048	2.5
0		10	0.0053	2.5
10		12	0.0064	2.5
20		9	0.0048	2.5
30		9	0.0048	2.5
40		11	0.0059	2.5
50		9	0.0048	2.5
55		9	0.0048	2.5
25	4.2	7	0.0037	2.5
	3.5	10	0.0053	2.5

LTE Band 17 (Part 27) result


Middle Channel, $f_0 = 710\text{ MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	7	0.0099	2.5
0		9	0.0113	2.5
10		4	0.0141	2.5
20		5	0.0056	2.5
30		6	0.0028	2.5
40		6	0.0155	2.5
50		11	0.0197	2.5
55		7	0.0028	2.5
25	4.2	9	0.0127	2.5
	3.5	11	0.0183	2.5

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test					
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/17/2014	09/16/2015	☒
Power Splitter	1#	1#	09/02/2014	09/01/2015	☒
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	☒
Wideband Radio Communication Tester	CMW500	120906	03/29/2014	03/28/2015	☒
Temperature/Humidity Chamber	UHL-270	001	10/10/2014	10/09/2015	☒
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	☒
Microwave Preamplifier (0.5 ~ 18GHz)	PAM-118	443008	09/02/2014	09/01/2015	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	☒
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/22/2014	09/21/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/25/2014	09/24/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/18/2014	09/17/2015	☒
Tunable Notch Filter	3NF-800/1000-S	AA4	09/02/2014	09/01/2015	☒
Tunable Notch Filter	3NF-1000/2000-S	AM 4	09/02/2014	09/01/2015	☒

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo

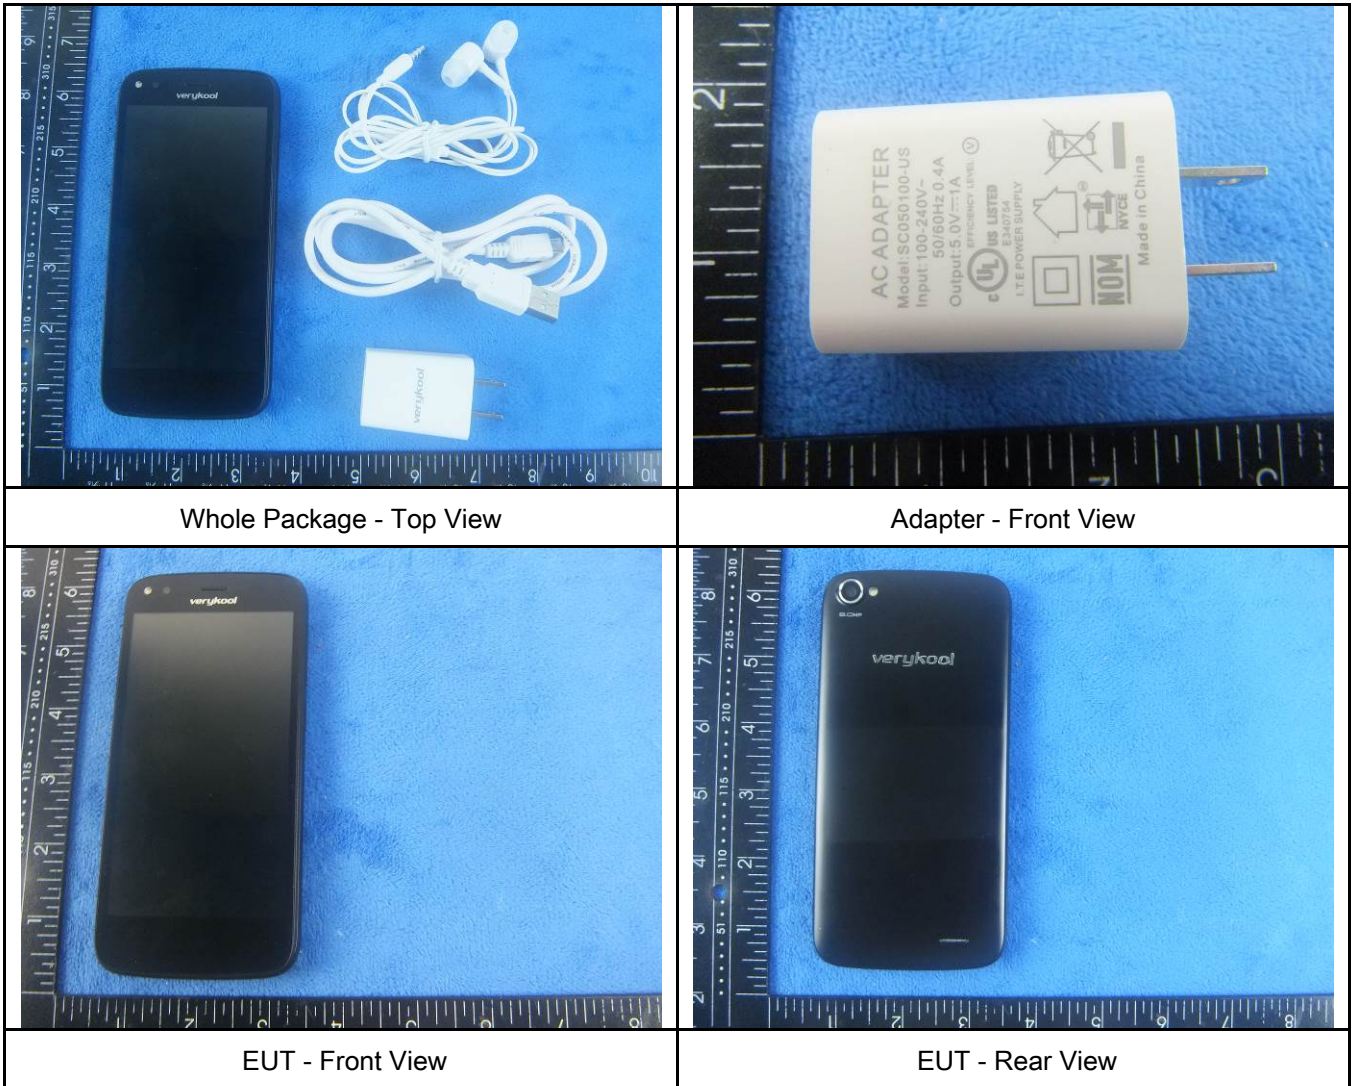


Test Report	15070591-FCC-R5
Page	140 of 149




EUT - Top View

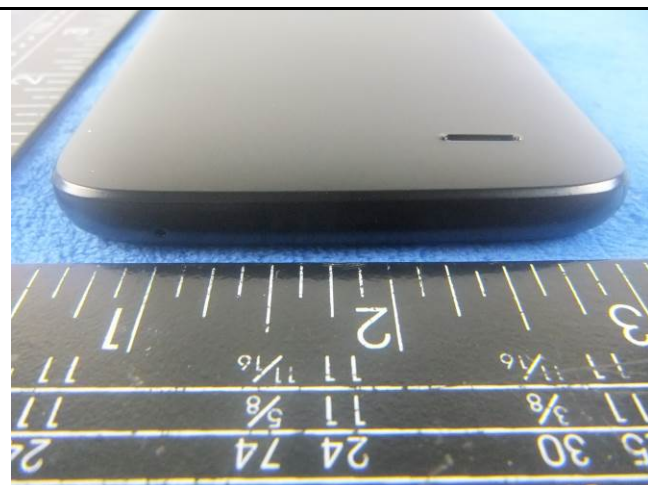

EUT - Bottom View

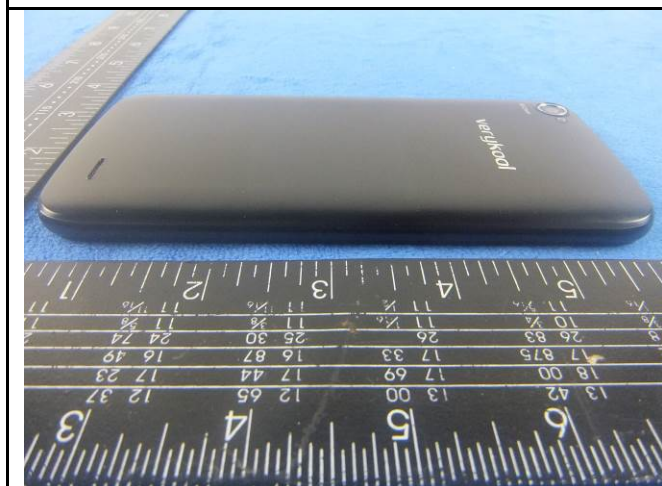

EUT - Left View

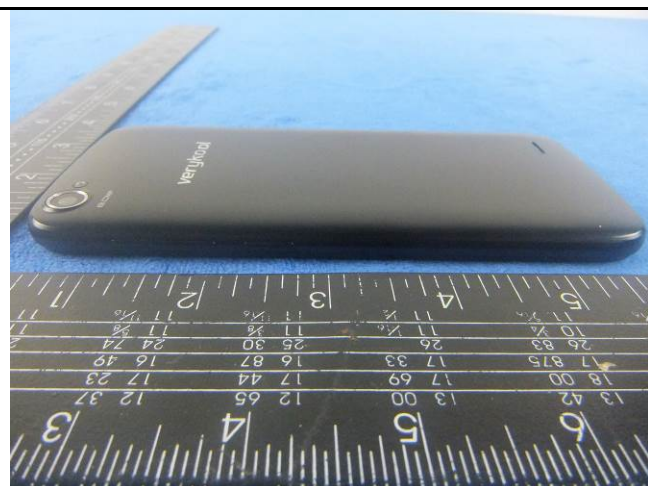

EUT - Right View


Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2

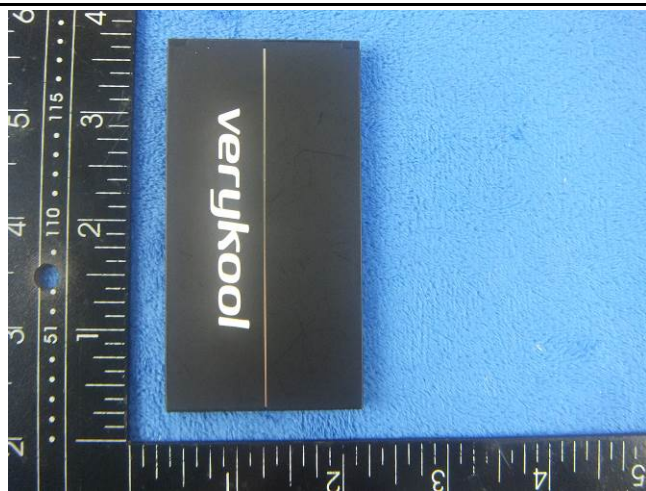


Battery - Top View




Battery - Bottom View

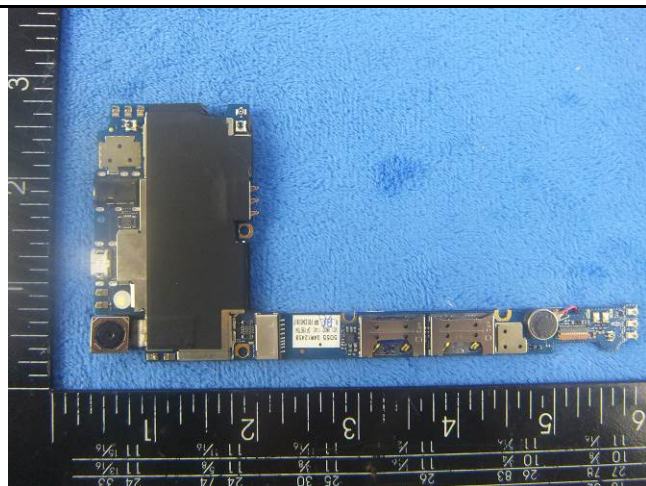


Mainbard with Shielding - Front View 1

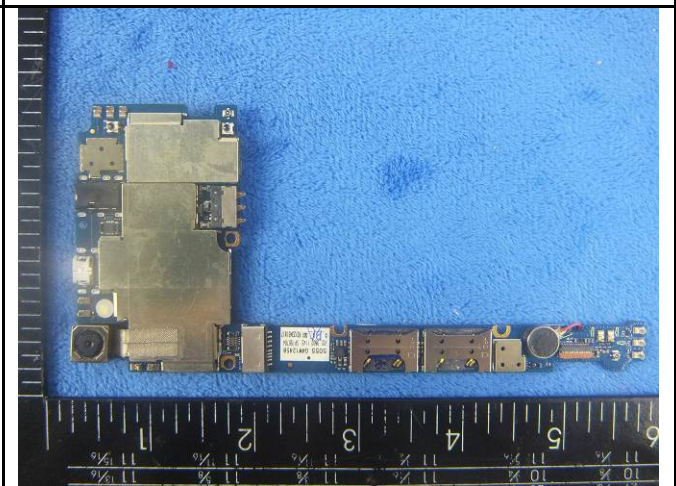


Mainbard with Shielding - Front View 2

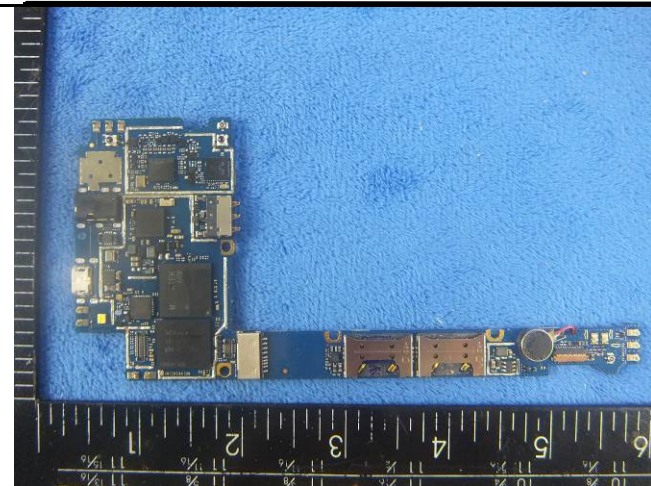

Mainboard without Shielding – Front View

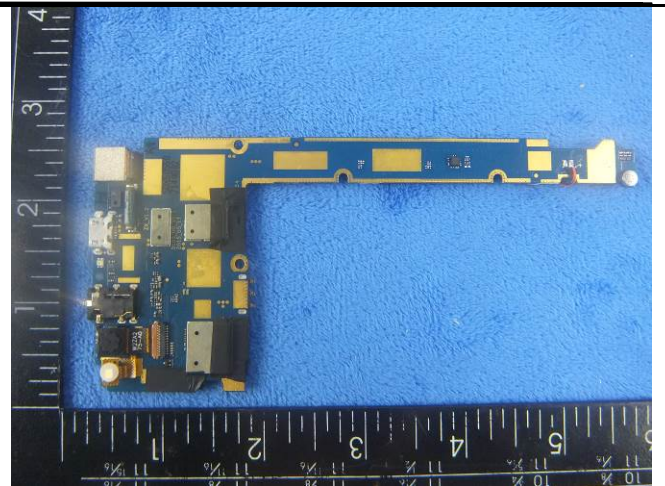

Mainboard With Shielding - Rear View

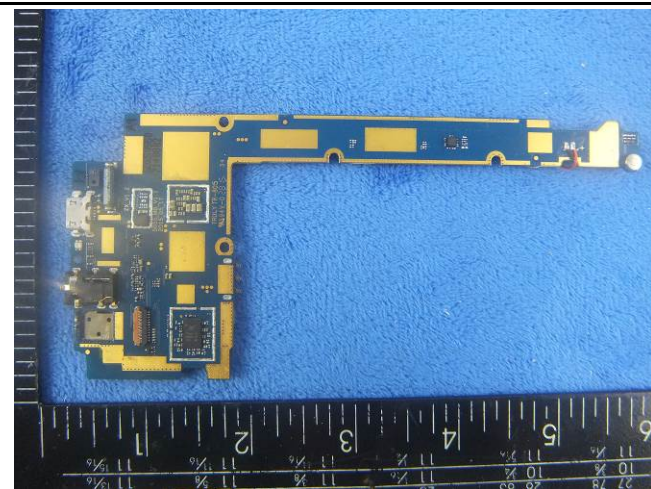

Mainboard Without Shielding - Rear View



LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD/LTE Antenna View

Test Report	15070591-FCC-R5
Page	143 of 149



WIFI/BT/BLE - Antenna View

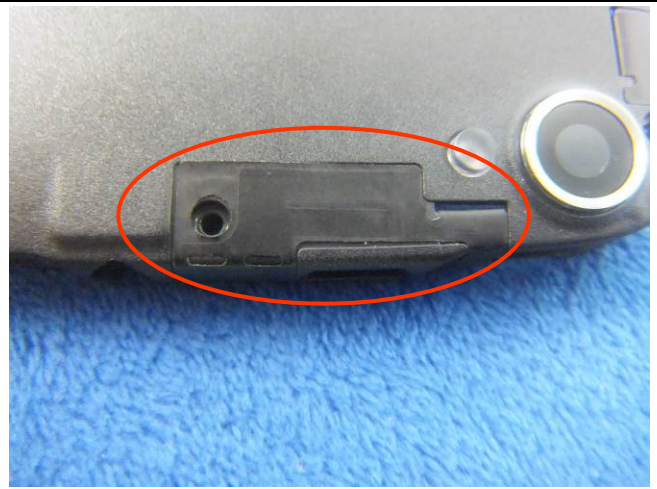


GPS - Antenna View

Annex B.iii. Photograph: Test Setup Photo



Radiated Spurious Emissions Test Setup Below 1GHz

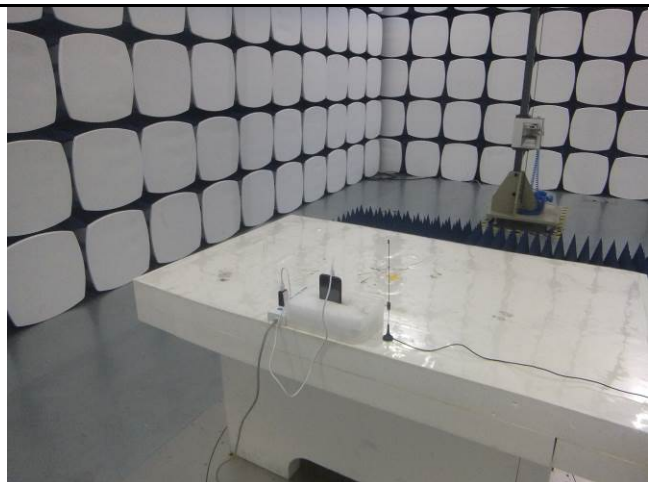


Radiated Spurious Emissions Test Setup Above
1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

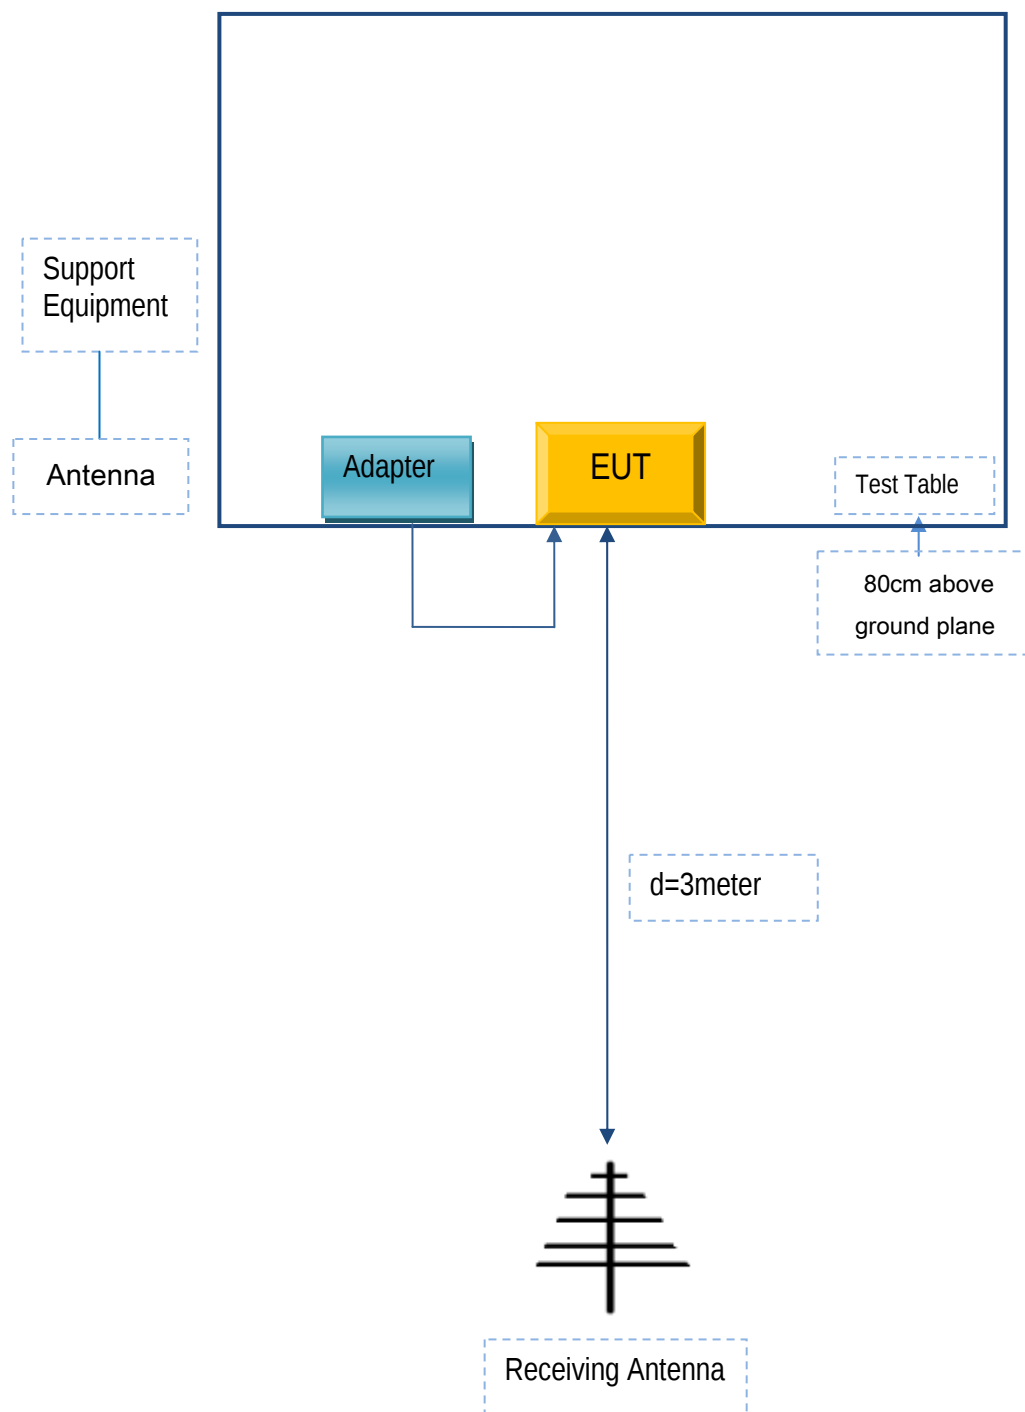

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report	15070591-FCC-R5
Page	147 of 149

Annex C.ii. EUT OPERATING CONKITIONS

N/A

Test Report	15070591-FCC-R5
Page	148 of 149

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report	15070591-FCC-R5
Page	149 of 149

Annex E. DECLARATION OF SIMILARITY

N/A