



|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge                           | Test Date     | March 27, 2022  |
| Polarize  | Vertical                            | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                    |               |                 |

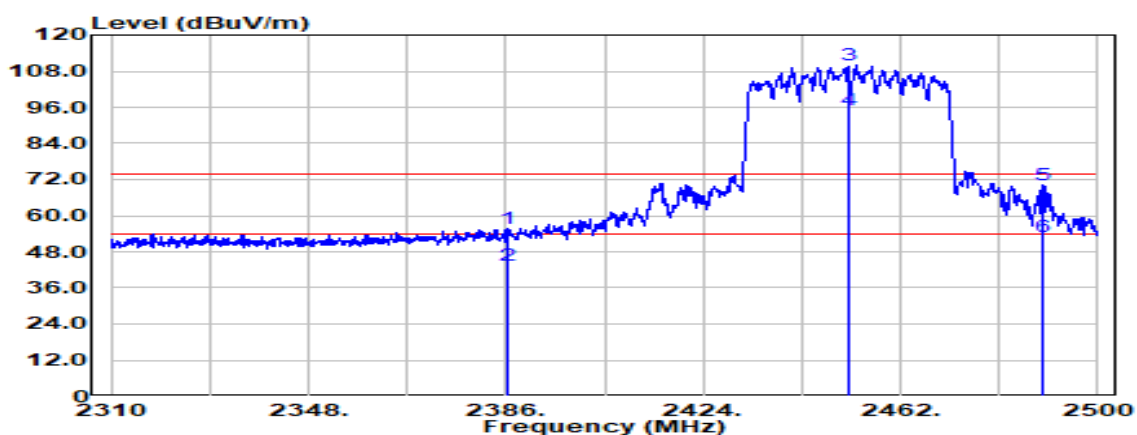


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2386.380           | Peak                           | 43.04                               | 12.46          | 55.50                    | 74.00                    | -18.50         |
| 2386.380           | Average                        | 31.19                               | 12.46          | 43.66                    | 54.00                    | -10.34         |
| 2452.000           | Peak                           | 97.25                               | 12.86          | 110.11                   | 74.00                    | 36.11          |
| 2452.000           | Average                        | 82.05                               | 12.86          | 94.91                    | 54.00                    | 40.91          |
| 2489.550           | Peak                           | 57.22                               | 13.12          | 70.34                    | 74.00                    | -3.66          |
| 2489.550           | Average                        | 39.79                               | 13.12          | 52.91                    | 54.00                    | -1.09          |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge                           | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                          | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average                      |               |                 |

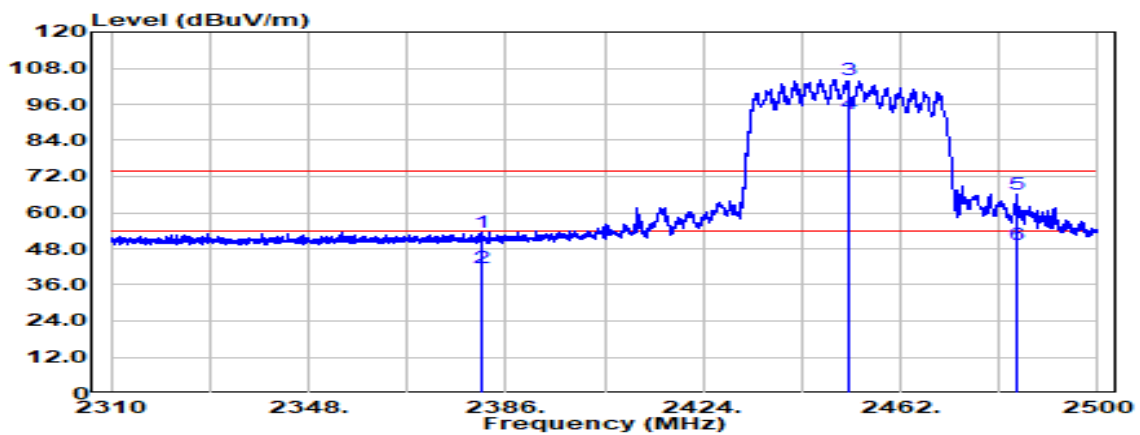

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2381.440           | Peak                           | 41.00                               | 12.44          | 53.43                    | 74.00                    | -20.57         |
| 2381.440           | Average                        | 29.11                               | 12.44          | 41.55                    | 54.00                    | -12.45         |
| 2452.000           | Peak                           | 91.36                               | 12.86          | 104.22                   | --                       | --             |
| 2452.000           | Average                        | 79.98                               | 12.86          | 92.84                    | --                       | --             |
| 2484.420           | Peak                           | 52.90                               | 13.08          | 65.98                    | 74.00                    | -8.02          |
| 2484.420           | Average                        | 36.33                               | 13.08          | 49.41                    | 54.00                    | -4.59          |


|           |                                              |               |                 |
|-----------|----------------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>(242/62) CH 2452MHz | Temp/Hum      | 21.9(°C)/ 62%RH |
| Test Item | Band Edge                                    | Test Date     | May 3, 2022     |
| Polarize  | Vertical                                     | Test Engineer | Ray Li          |
| Detector  | Peak and Average                             |               |                 |

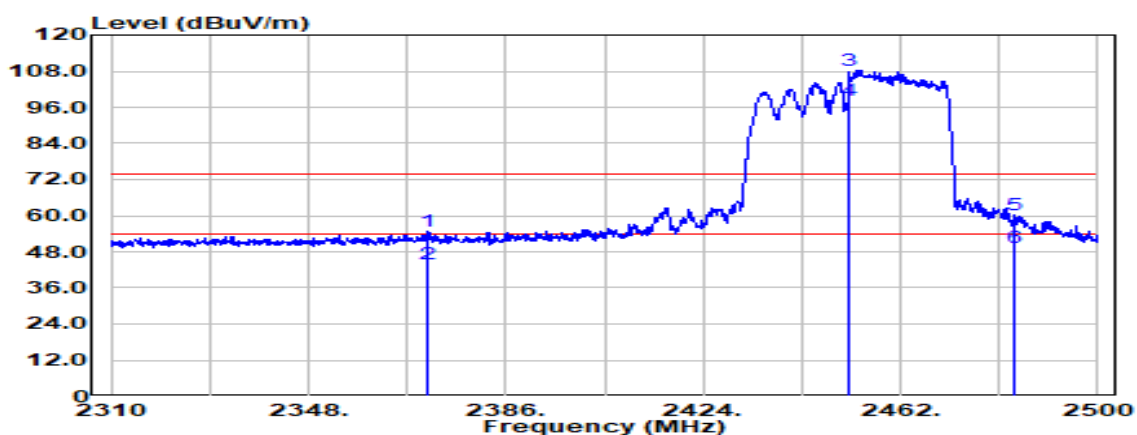

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2371.085           | Peak                           | 42.41                               | 12.39          | 54.80                    | 74.00                    | -19.20         |
| 2371.085           | Average                        | 31.59                               | 12.39          | 43.97                    | 54.00                    | -10.03         |
| 2452.000           | Peak                           | 95.47                               | 12.86          | 108.33                   | 74.00                    | 34.33          |
| 2452.000           | Average                        | 85.49                               | 12.86          | 98.35                    | 54.00                    | 44.35          |
| 2484.135           | Peak                           | 47.12                               | 13.08          | 60.20                    | 74.00                    | -13.80         |
| 2484.135           | Average                        | 36.16                               | 13.08          | 49.25                    | 54.00                    | -4.75          |

Report No.: TMWK2201000110KR

|           |                                              |               |                 |
|-----------|----------------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>(242/62) CH 2452MHz | Temp/Hum      | 21.9(°C)/ 62%RH |
| Test Item | Band Edge                                    | Test Date     | May 3, 2022     |
| Polarize  | Horizontal                                   | Test Engineer | Ray Li          |
| Detector  | Peak & Average                               |               |                 |

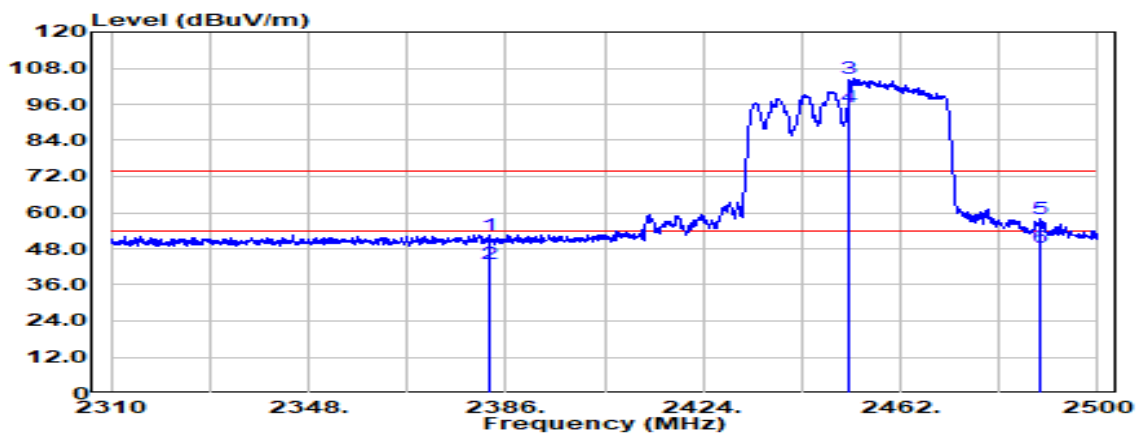


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2382.960           | Peak                           | 40.29                               | 12.44          | 52.74                    | 74.00                    | -21.26         |
| 2382.960           | Average                        | 30.43                               | 12.44          | 42.88                    | 54.00                    | -11.12         |
| 2452.000           | Peak                           | 91.71                               | 12.86          | 104.58                   | 74.00                    | 30.58          |
| 2452.000           | Average                        | 82.08                               | 12.86          | 94.95                    | 54.00                    | 40.95          |
| 2489.075           | Peak                           | 44.84                               | 13.12          | 57.96                    | 74.00                    | -16.04         |
| 2489.075           | Average                        | 35.43                               | 13.12          | 48.55                    | 54.00                    | -5.45          |



Report No.: TMWK2201000110KR

**BFM ON**


|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak and Average                     |               |                 |

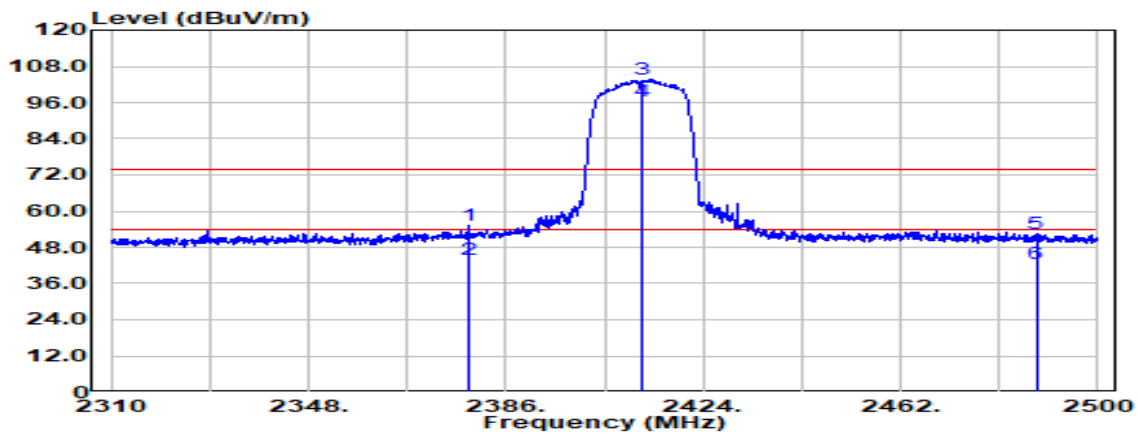

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2378.875           | Peak                           | 42.66                               | 12.42          | 55.08                    | 74.00                    | -18.92         |
| 2378.875           | Average                        | 31.55                               | 12.42          | 43.97                    | 54.00                    | -10.03         |
| 2412.000           | Peak                           | 91.16                               | 12.61          | 103.77                   | -                        | -              |
| 2412.000           | Average                        | 83.86                               | 12.61          | 96.46                    | -                        | -              |
| 2488.125           | Peak                           | 39.59                               | 13.11          | 52.70                    | 74.00                    | -21.30         |
| 2488.125           | Average                        | 29.45                               | 13.11          | 42.56                    | 54.00                    | -11.44         |


Report No.: TMWK2201000110KR

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

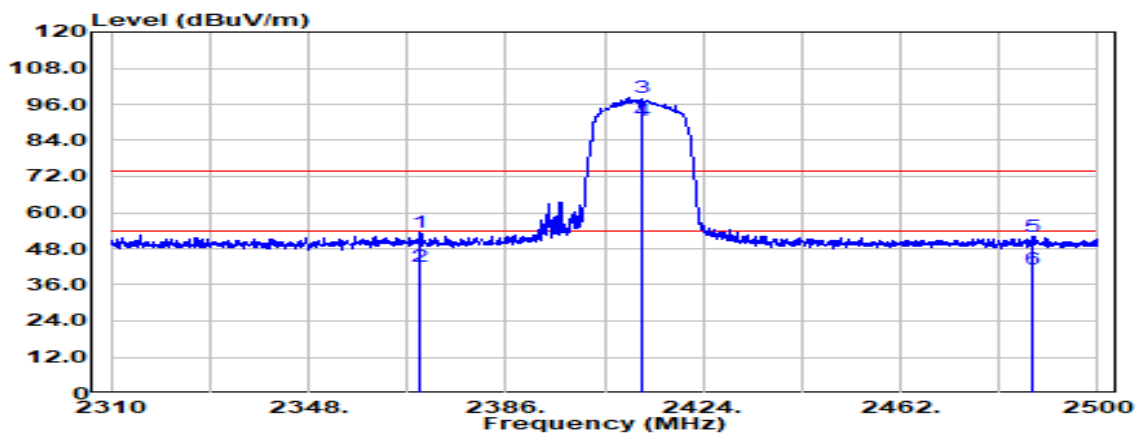

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2369.660           | Peak                           | 40.85                               | 12.38          | 53.23                    | 74.00                    | -20.77         |
| 2369.660           | Average                        | 29.88                               | 12.38          | 42.26                    | 54.00                    | -11.74         |
| 2412.000           | Peak                           | 85.55                               | 12.61          | 98.16                    | -                        | -              |
| 2412.000           | Average                        | 77.91                               | 12.61          | 90.51                    | -                        | -              |
| 2487.555           | Peak                           | 39.16                               | 13.11          | 52.27                    | 74.00                    | -21.73         |
| 2487.555           | Average                        | 28.31                               | 13.11          | 41.42                    | 54.00                    | -12.58         |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak and Average                     |               |                 |

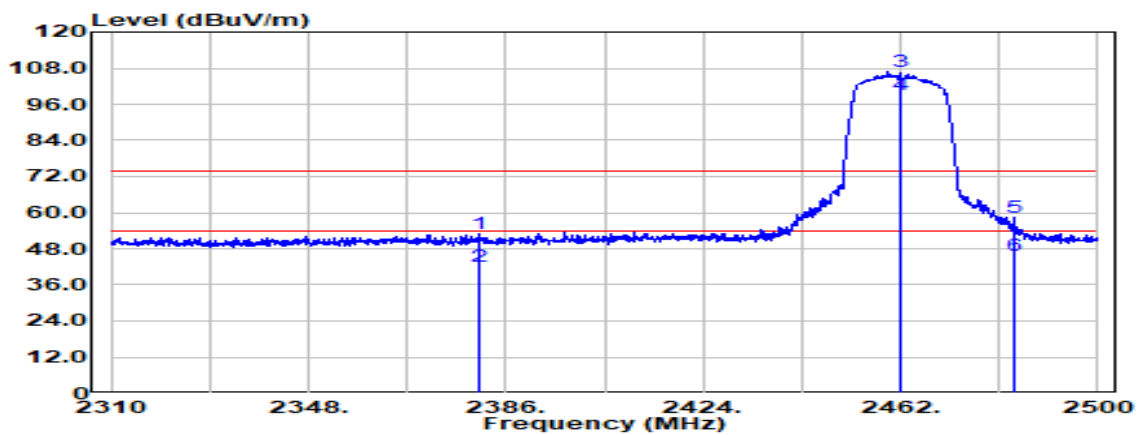

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2381.060           | Peak                           | 40.47                               | 12.44          | 52.90                    | 74.00                    | -21.10         |
| 2381.060           | Average                        | 29.68                               | 12.44          | 42.12                    | 54.00                    | -11.88         |
| 2462.000           | Peak                           | 94.05                               | 12.93          | 106.99                   | -                        | -              |
| 2462.000           | Average                        | 86.14                               | 12.93          | 99.08                    | -                        | -              |
| 2483.850           | Peak                           | 45.50                               | 13.08          | 58.58                    | 74.00                    | -15.42         |
| 2483.850           | Average                        | 32.65                               | 13.08          | 45.73                    | 54.00                    | -8.27          |

Report No.: TMWK2201000110KR


|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |



| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2386.190           | Peak                           | 40.15                               | 12.46          | 52.61                    | 74.00                    | -21.39         |
| 2386.190           | Average                        | 29.06                               | 12.46          | 41.52                    | 54.00                    | -12.48         |
| 2462.000           | Peak                           | 86.95                               | 12.93          | 99.88                    | -                        | -              |
| 2462.000           | Average                        | 79.44                               | 12.93          | 92.37                    | -                        | -              |
| 2489.360           | Peak                           | 39.33                               | 13.12          | 52.44                    | 74.00                    | -21.56         |
| 2489.360           | Average                        | 28.70                               | 13.12          | 41.82                    | 54.00                    | -12.18         |


Report No.: TMWK2201000110KR

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak and Average                     |               |                 |

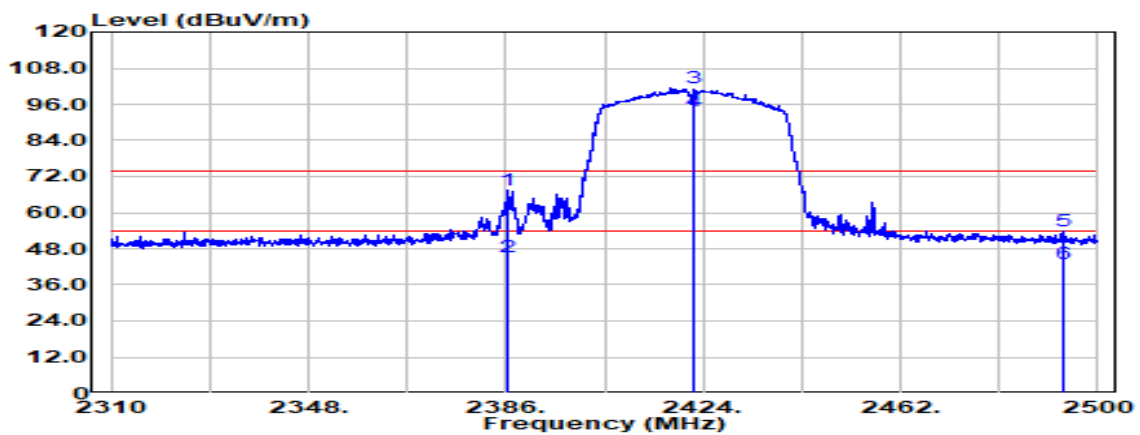

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2386.570           | Peak                           | 54.88                               | 12.46          | 67.35                    | 74.00                    | -6.65          |
| 2386.570           | Average                        | 32.69                               | 12.46          | 45.15                    | 54.00                    | -8.85          |
| 2422.000           | Peak                           | 88.65                               | 12.67          | 101.32                   | -                        | -              |
| 2422.000           | Average                        | 81.06                               | 12.67          | 93.73                    | -                        | -              |
| 2493.160           | Peak                           | 40.67                               | 13.14          | 53.82                    | 74.00                    | -20.18         |
| 2493.160           | Average                        | 29.65                               | 13.14          | 42.80                    | 54.00                    | -11.20         |


|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

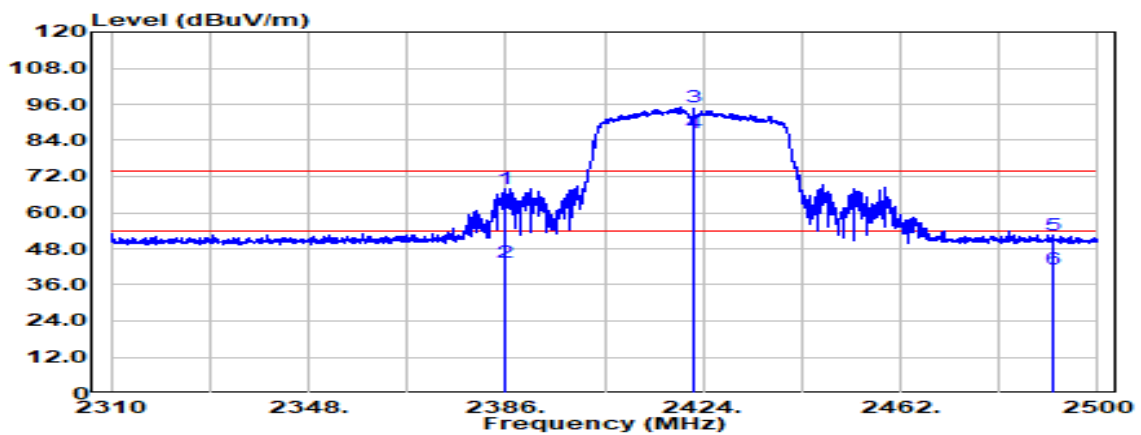

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2386.000           | Peak                           | 55.62                               | 12.46          | 68.08                    | 74.00                    | -5.92          |
| 2386.000           | Average                        | 30.96                               | 12.46          | 43.42                    | 54.00                    | -10.58         |
| 2422.000           | Peak                           | 82.21                               | 12.67          | 94.88                    | -                        | -              |
| 2422.000           | Average                        | 73.63                               | 12.67          | 86.30                    | -                        | -              |
| 2491.450           | Peak                           | 39.46                               | 13.13          | 52.59                    | 74.00                    | -21.41         |
| 2491.450           | Average                        | 28.30                               | 13.13          | 41.43                    | 54.00                    | -12.57         |


Report No.: TMWK2201000110KR

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak and Average                     |               |                 |

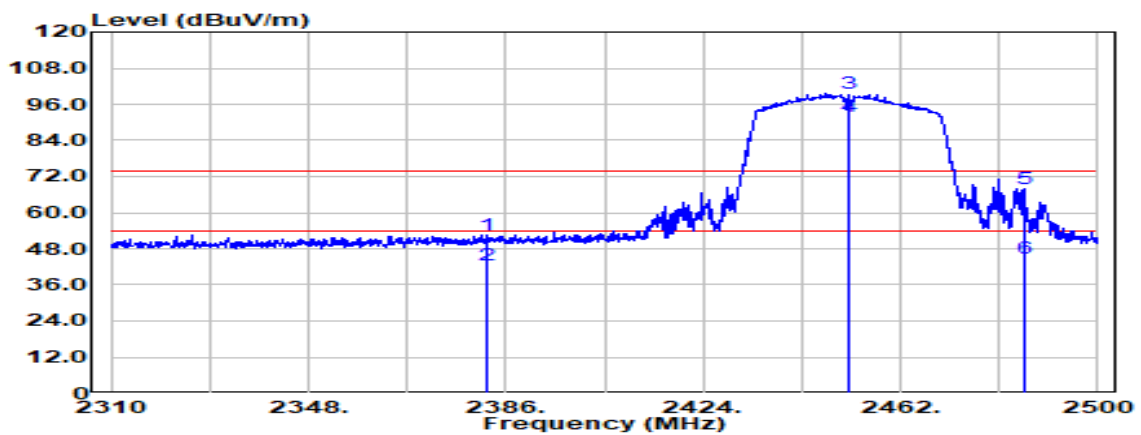


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2382.200           | Peak                           | 40.30                               | 12.44          | 52.74                    | 74.00                    | -21.26         |
| 2382.200           | Average                        | 30.16                               | 12.44          | 42.60                    | 54.00                    | -11.40         |
| 2452.000           | Peak                           | 86.69                               | 12.86          | 99.55                    | -                        | -              |
| 2452.000           | Average                        | 79.13                               | 12.86          | 91.99                    | -                        | -              |
| 2485.940           | Peak                           | 54.80                               | 13.09          | 67.89                    | 74.00                    | -6.11          |
| 2485.940           | Average                        | 31.74                               | 13.09          | 44.83                    | 54.00                    | -9.17          |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                            | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

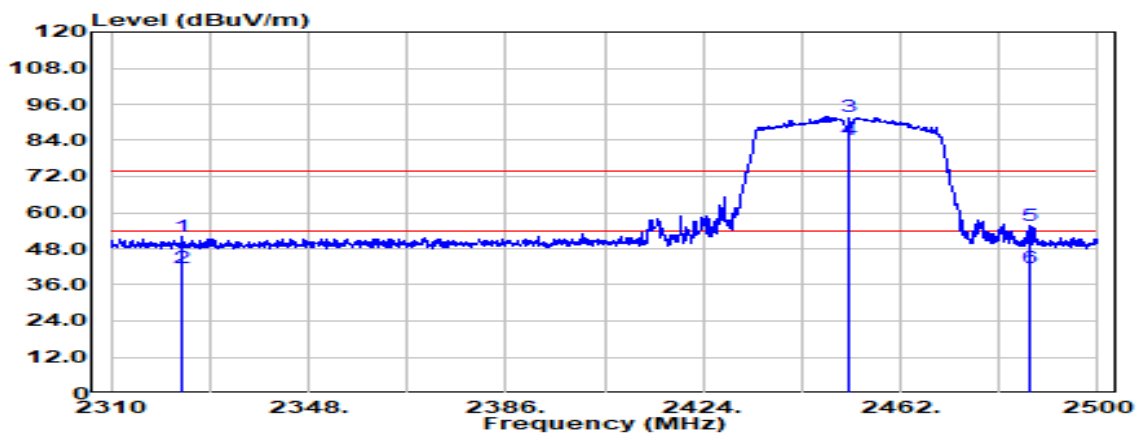


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2323.490           | Peak                           | 39.69                               | 12.24          | 51.93                    | 74.00                    | -22.07         |
| 2323.490           | Average                        | 29.38                               | 12.24          | 41.62                    | 54.00                    | -12.38         |
| 2452.000           | Peak                           | 79.21                               | 12.86          | 92.08                    | -                        | -              |
| 2452.000           | Average                        | 71.48                               | 12.86          | 84.34                    | -                        | -              |
| 2486.795           | Peak                           | 42.55                               | 13.10          | 55.65                    | 74.00                    | -18.35         |
| 2486.795           | Average                        | 28.77                               | 13.10          | 41.87                    | 54.00                    | -12.13         |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak and Average                    |               |                 |

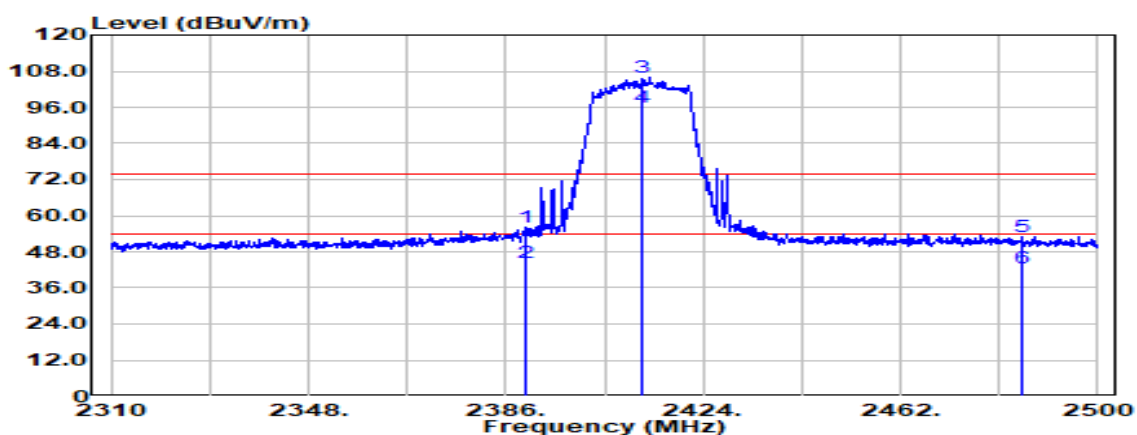

| Frequency (MHz) | Detector Mode (PK/QP/AV) | Spectrum Reading Level (dBUV) | Factor (dB) | Actual FS (dBUV/m) | Limit @3m (dBUV/m) | Margin (dB) |
|-----------------|--------------------------|-------------------------------|-------------|--------------------|--------------------|-------------|
| 2389.705        | Peak                     | 43.71                         | 12.48       | 56.19              | 74.00              | -17.81      |
| 2389.705        | Average                  | 31.74                         | 12.48       | 44.22              | 54.00              | -9.78       |
| 2412.000        | Peak                     | 93.15                         | 12.61       | 105.75             | -                  | -           |
| 2412.000        | Average                  | 83.61                         | 12.61       | 96.21              | -                  | -           |
| 2485.275        | Peak                     | 40.12                         | 13.09       | 53.21              | 74.00              | -20.79      |
| 2485.275        | Average                  | 29.59                         | 13.09       | 42.68              | 54.00              | -11.32      |


|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

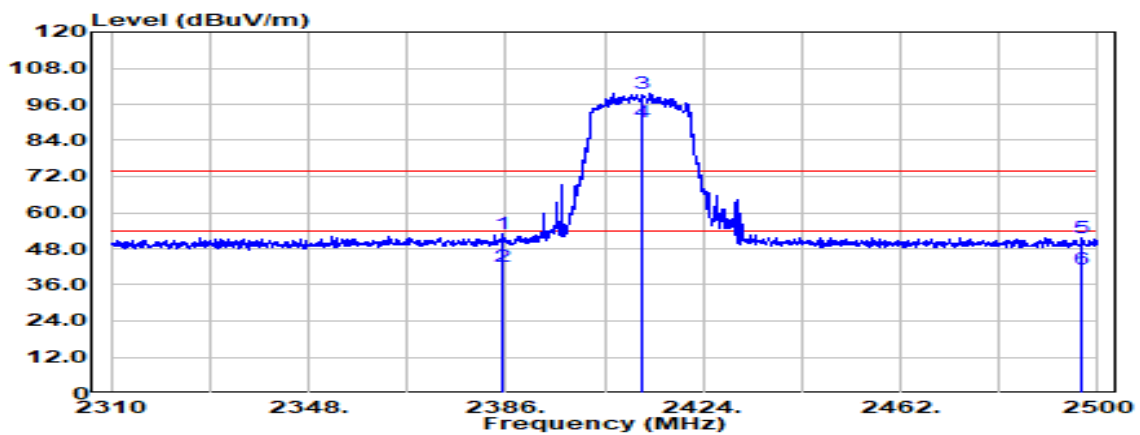

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2385.335           | Peak                           | 40.34                               | 12.46          | 52.80                    | 74.00                    | -21.20         |
| 2385.335           | Average                        | 29.80                               | 12.46          | 42.26                    | 54.00                    | -11.74         |
| 2412.000           | Peak                           | 87.23                               | 12.61          | 99.83                    | -                        | -              |
| 2412.000           | Average                        | 77.55                               | 12.61          | 90.16                    | -                        | -              |
| 2496.960           | Peak                           | 38.64                               | 13.17          | 51.81                    | 74.00                    | -22.19         |
| 2496.960           | Average                        | 28.23                               | 13.17          | 41.40                    | 54.00                    | -12.60         |


Report No.: TMWK2201000110KR

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak and Average                    |               |                 |

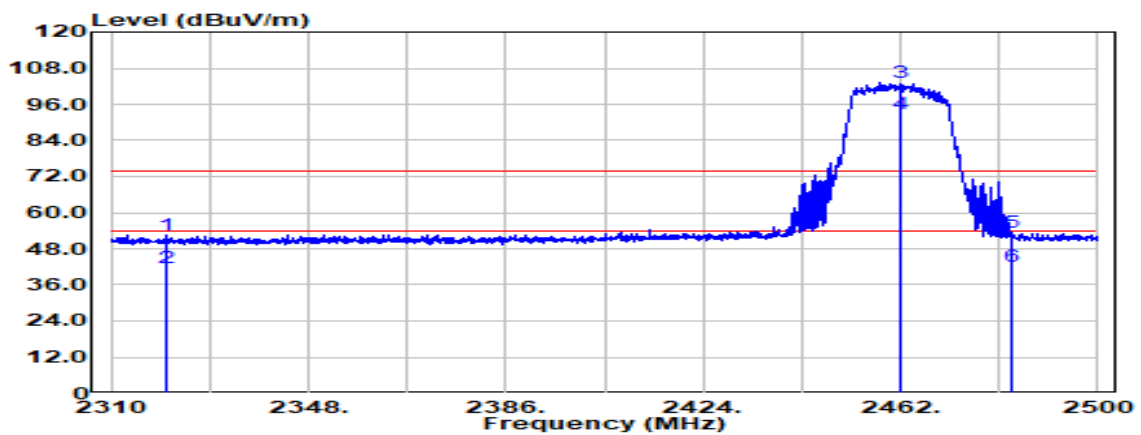


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2320.830           | Peak                           | 40.43                               | 12.23          | 52.66                    | 74.00                    | -21.34         |
| 2320.830           | Average                        | 29.43                               | 12.23          | 41.66                    | 54.00                    | -12.34         |
| 2462.000           | Peak                           | 90.48                               | 12.93          | 103.41                   | -                        | -              |
| 2462.000           | Average                        | 79.86                               | 12.93          | 92.79                    | -                        | -              |
| 2483.565           | Peak                           | 40.30                               | 13.08          | 53.37                    | 74.00                    | -20.63         |
| 2483.565           | Average                        | 29.15                               | 13.08          | 42.22                    | 54.00                    | -11.78         |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

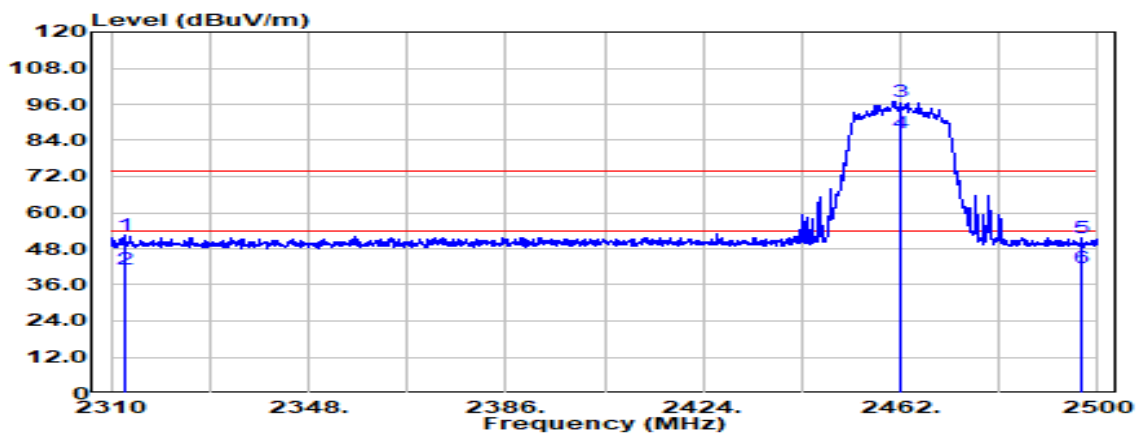


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2312.565           | Peak                           | 40.23                               | 12.22          | 52.45                    | 74.00                    | -21.55         |
| 2312.565           | Average                        | 29.20                               | 12.22          | 41.42                    | 54.00                    | -12.58         |
| 2462.000           | Peak                           | 83.89                               | 12.93          | 96.82                    | -                        | -              |
| 2462.000           | Average                        | 73.72                               | 12.93          | 86.66                    | -                        | -              |
| 2496.960           | Peak                           | 38.52                               | 13.17          | 51.69                    | 74.00                    | -22.31         |
| 2496.960           | Average                        | 28.28                               | 13.17          | 41.45                    | 54.00                    | -12.55         |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak and Average                    |               |                 |

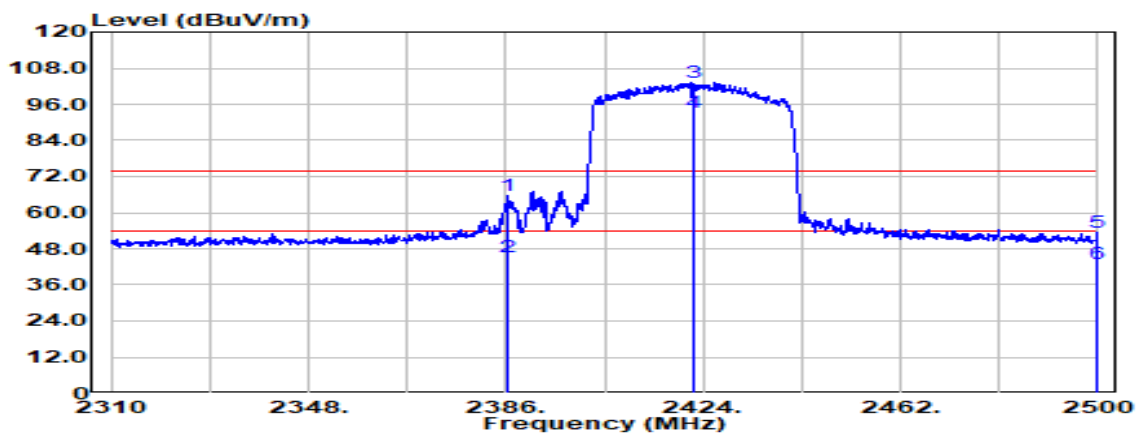

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2386.570           | Peak                           | 53.00                               | 12.46          | 65.46                    | 74.00                    | -8.54          |
| 2386.570           | Average                        | 32.69                               | 12.46          | 45.15                    | 54.00                    | -8.85          |
| 2422.000           | Peak                           | 90.51                               | 12.67          | 103.18                   | -                        | -              |
| 2422.000           | Average                        | 80.81                               | 12.67          | 93.48                    | -                        | -              |
| 2499.905           | Peak                           | 40.04                               | 13.19          | 53.23                    | 74.00                    | -20.77         |
| 2499.905           | Average                        | 29.74                               | 13.19          | 42.93                    | 54.00                    | -11.07         |


|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

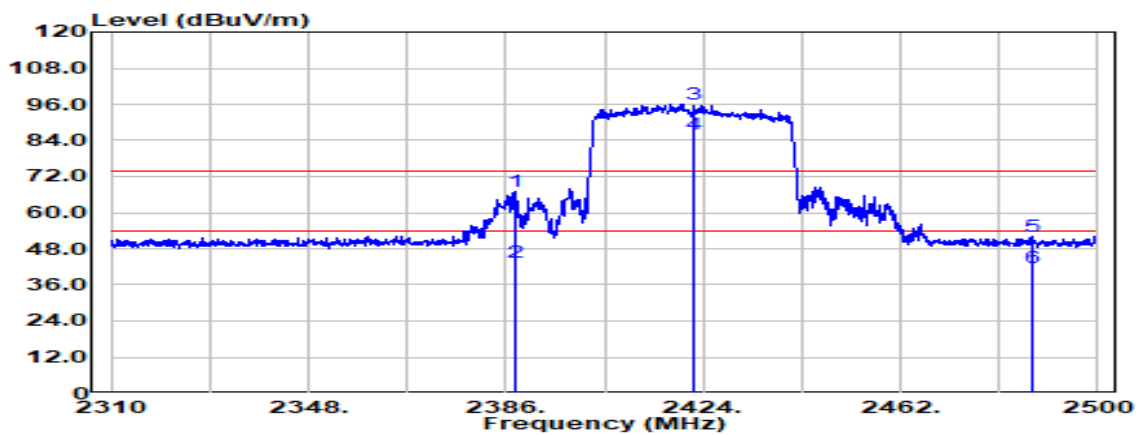

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2387.615           | Peak                           | 54.72                               | 12.47          | 67.19                    | 74.00                    | -6.81          |
| 2387.615           | Average                        | 31.11                               | 12.47          | 43.58                    | 54.00                    | -10.42         |
| 2422.000           | Peak                           | 83.49                               | 12.67          | 96.16                    | -                        | -              |
| 2422.000           | Average                        | 73.27                               | 12.67          | 85.95                    | -                        | -              |
| 2487.175           | Peak                           | 38.95                               | 13.10          | 52.05                    | 74.00                    | -21.95         |
| 2487.175           | Average                        | 28.38                               | 13.10          | 41.48                    | 54.00                    | -12.52         |

Report No.: TMWK2201000110KR


|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                           | Test Date     | April 12, 2022  |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak and Average                    |               |                 |

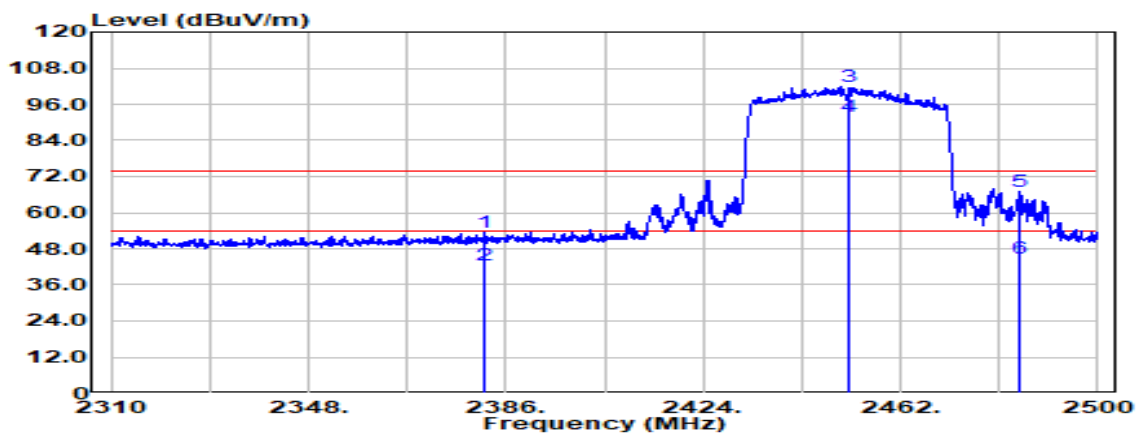

| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2381.725           | Peak                           | 41.00                               | 12.44          | 53.44                    | 74.00                    | -20.56         |
| 2381.725           | Average                        | 30.11                               | 12.44          | 42.54                    | 54.00                    | -11.46         |
| 2452.000           | Peak                           | 88.82                               | 12.86          | 101.69                   | -                        | -              |
| 2452.000           | Average                        | 78.94                               | 12.86          | 91.80                    | -                        | -              |
| 2484.895           | Peak                           | 53.81                               | 13.09          | 66.90                    | 74.00                    | -7.10          |
| 2484.895           | Average                        | 31.53                               | 13.09          | 44.62                    | 54.00                    | -9.38          |

Report No.: TMWK2201000110KR

|           |                                         |               |                 |
|-----------|-----------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>Low CH 2452MHz | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Band Edge                               | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                              | Test Engineer | Ray Li          |
| Detector  | Peak & Average                          |               |                 |

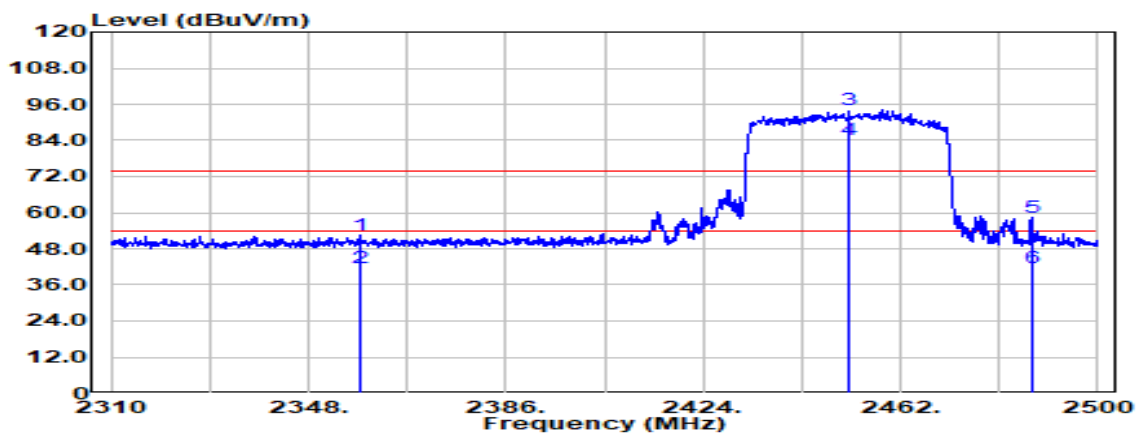


| Frequency<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|--------------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 2357.785           | Peak                           | 40.08                               | 12.32          | 52.40                    | 74.00                    | -21.60         |
| 2357.785           | Average                        | 29.37                               | 12.32          | 41.69                    | 54.00                    | -12.31         |
| 2452.000           | Peak                           | 81.16                               | 12.86          | 94.02                    | -                        | -              |
| 2452.000           | Average                        | 71.27                               | 12.86          | 84.13                    | -                        | -              |
| 2487.175           | Peak                           | 45.19                               | 13.10          | 58.29                    | 74.00                    | -15.71         |
| 2487.175           | Average                        | 28.63                               | 13.10          | 41.73                    | 54.00                    | -12.27         |

Report No.: TMWK2201000110KR

### Below 1G Test Data

#### **BFM OFF**

|           |            |               |                 |
|-----------|------------|---------------|-----------------|
| Test Mode | Mode 1     | Temp/Hum      | 25.9(°C)/ 56%RH |
| Test Item | 30MHz-1GHz | Test Date     | April 28, 2022  |
| Polarize  | Vertical   | Test Engineer | Tony Chao       |
| Detector  | Peak       |               |                 |

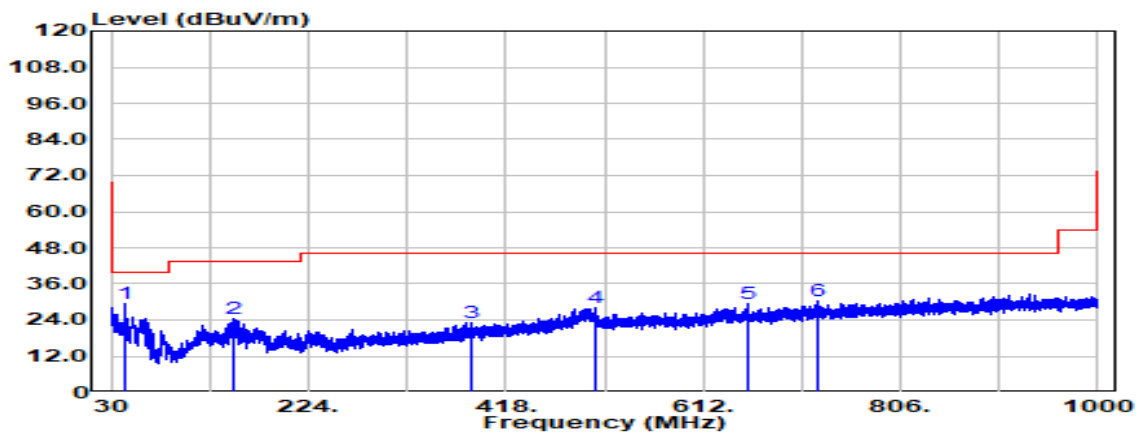


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 42.610         | Peak                           | 41.12                               | -11.74         | 29.38                    | 40.00                    | -10.62         |
| 150.886        | Peak                           | 35.07                               | -10.67         | 24.39                    | 43.50                    | -19.11         |
| 383.929        | Peak                           | 30.01                               | -6.98          | 23.03                    | 46.00                    | -22.97         |
| 506.634        | Peak                           | 31.68                               | -3.82          | 27.86                    | 46.00                    | -18.14         |
| 655.771        | Peak                           | 30.31                               | -1.10          | 29.21                    | 46.00                    | -16.79         |
| 724.156        | Peak                           | 30.22                               | -0.05          | 30.17                    | 46.00                    | -15.83         |

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000110KR

|           |            |               |                 |
|-----------|------------|---------------|-----------------|
| Test Mode | Mode 1     | Temp/Hum      | 25.9(°C)/ 56%RH |
| Test Item | 30MHz-1GHz | Test Date     | April 28, 2022  |
| Polarize  | Horizontal | Test Engineer | Tony Chao       |
| Detector  | Peak       |               |                 |

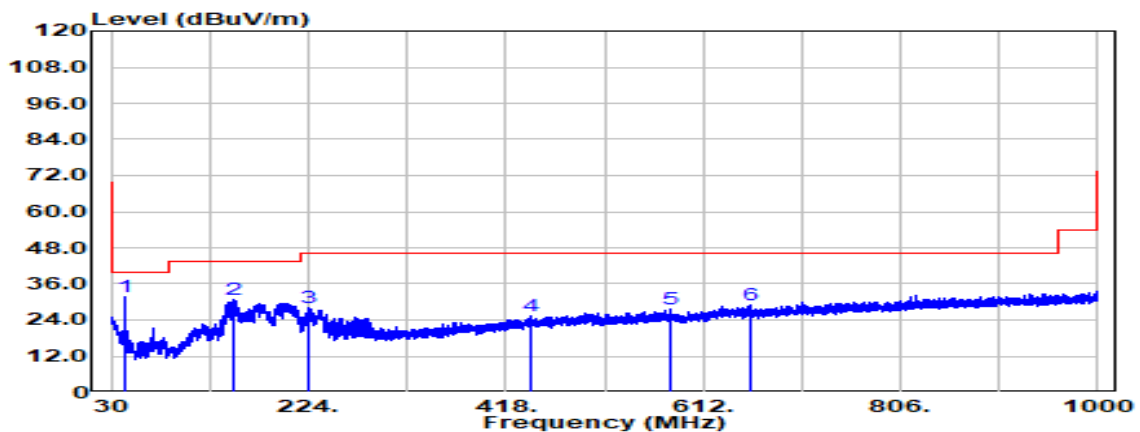

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 42.610         | Peak                           | 43.28                               | -11.74         | 31.54                    | 40.00                    | -8.46          |
| 150.886        | Peak                           | 41.53                               | -10.67         | 30.86                    | 43.50                    | -12.64         |
| 224.485        | Peak                           | 40.09                               | -12.03         | 28.06                    | 46.00                    | -17.94         |
| 443.705        | Peak                           | 30.22                               | -5.01          | 25.21                    | 46.00                    | -20.79         |
| 580.111        | Peak                           | 30.13                               | -2.66          | 27.47                    | 46.00                    | -18.53         |
| 659.288        | Peak                           | 30.21                               | -1.17          | 29.03                    | 46.00                    | -16.97         |


Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Report No.: TMWK2201000110KR

### Above 1G Test Data

#### BFM OFF

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2412 | Temp/Hum      | 25.3(°C)/ 53%RH |
| Test Item | Harmonic             | Test Date     | March 19, 2022  |
| Polarize  | Vertical             | Test Engineer | Tony Chao       |
| Detector  | Peak and Average     |               |                 |

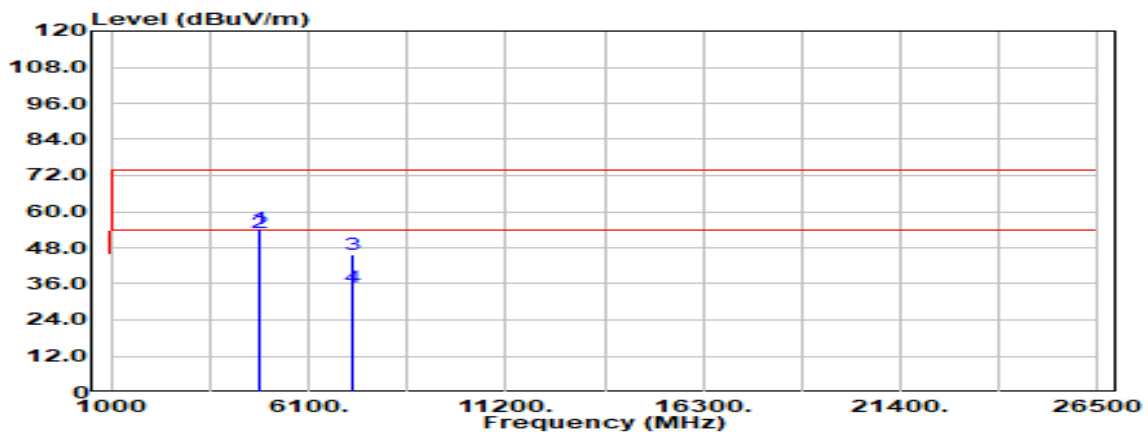


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 44.59                               | 9.53           | 54.12                    | 74.00                    | -19.88         |
| 4824.000       | Average                        | 43.41                               | 9.53           | 52.94                    | 54.00                    | -1.06          |
| 7236.000       | Peak                           | 32.37                               | 13.41          | 45.78                    | 74.00                    | -28.22         |
| 7236.000       | Average                        | 21.35                               | 13.41          | 34.76                    | 54.00                    | -19.24         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Horizontal           | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

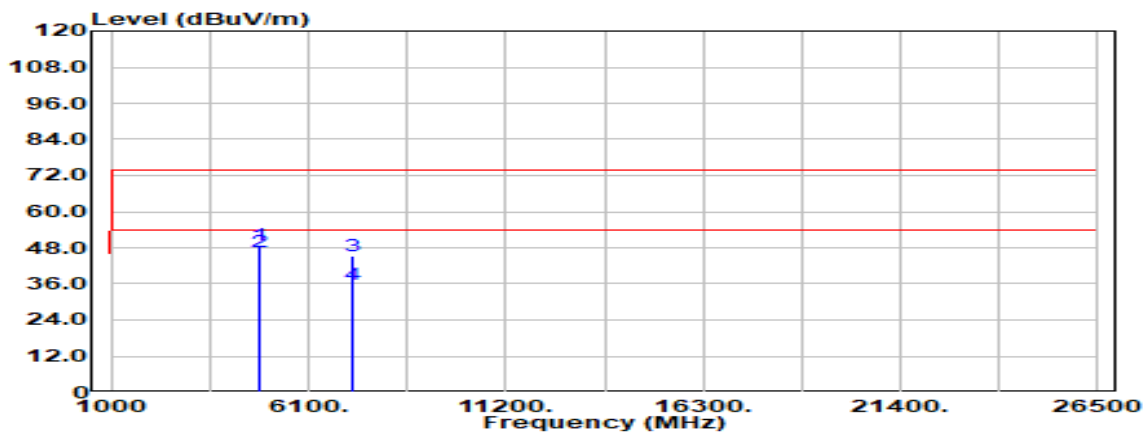

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 39.19                               | 9.53           | 48.71                    | 74.00                    | -25.29         |
| 4824.000       | Average                        | 37.09                               | 9.53           | 46.62                    | 54.00                    | -7.38          |
| 7236.000       | Peak                           | 31.92                               | 13.41          | 45.33                    | 74.00                    | -28.67         |
| 7236.000       | Average                        | 22.56                               | 13.41          | 35.97                    | 54.00                    | -18.03         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |


**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: TMWK2201000110KR

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2437 | Temp/Hum      | 25.3(°C)/ 53%RH |
| Test Item | Harmonic             | Test Date     | March 19, 2022  |
| Polarize  | Vertical             | Test Engineer | Tony Chao       |
| Detector  | Peak and Average     |               |                 |

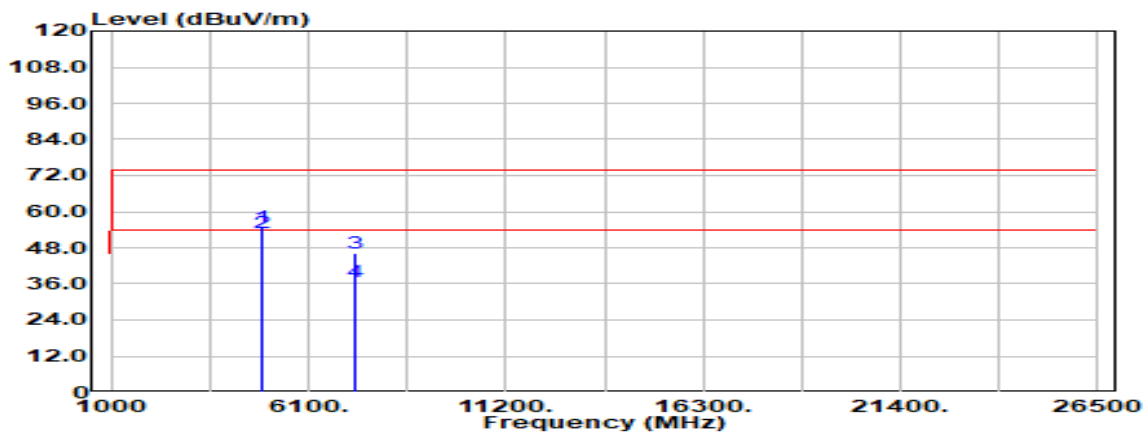


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 45.03                               | 9.60           | 54.63                    | 74.00                    | -19.37         |
| 4874.000       | Average                        | 43.61                               | 9.60           | 53.21                    | 54.00                    | -0.79          |
| 7311.000       | Peak                           | 32.83                               | 13.23          | 46.06                    | 74.00                    | -27.94         |
| 7311.000       | Average                        | 23.58                               | 13.23          | 36.81                    | 54.00                    | -17.19         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic             | Test Date     | March 24, 2022  |
| Polarize  | Horizontal           | Test Engineer | Tony Chao       |
| Detector  | Peak and Average     |               |                 |

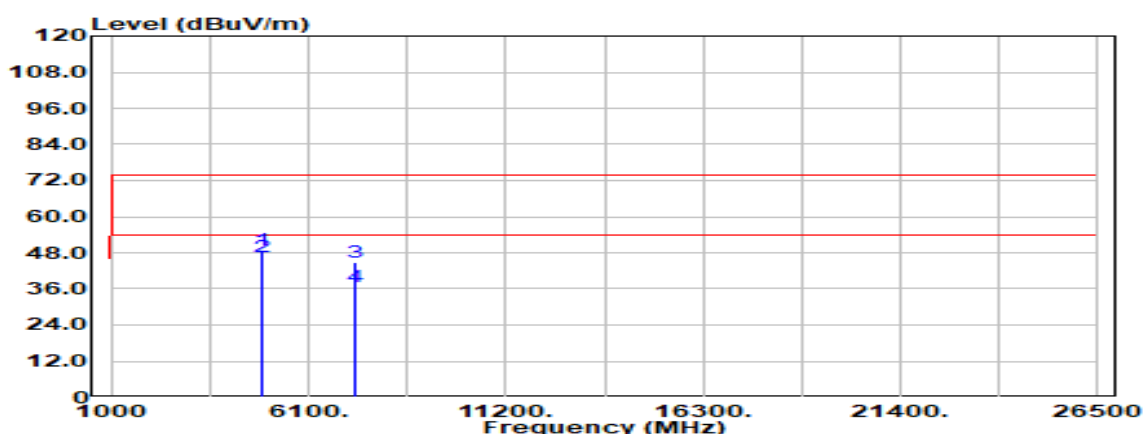


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4874.000       | Peak                           | 39.53                                | 9.60           | 49.13                     | 74.00                     | -24.87         |
| 4874.000       | Average                        | 37.11                                | 9.60           | 46.71                     | 54.00                     | -7.29          |
| 7311.000       | Peak                           | 31.58                                | 13.23          | 44.81                     | 74.00                     | -29.19         |
| 7311.000       | Average                        | 23.27                                | 13.23          | 36.50                     | 54.00                     | -17.50         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Vertical             | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

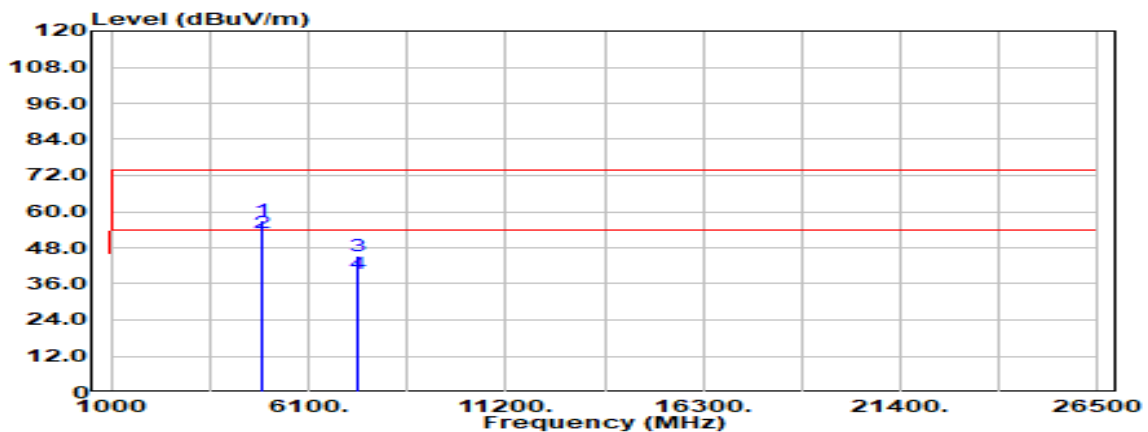


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4924.000       | Peak                           | 47.65                                | 9.63           | 57.28                     | 74.00                     | -16.72         |
| 4924.000       | Average                        | 43.18                                | 9.63           | 52.81                     | 54.00                     | -1.19          |
| 7386.000       | Peak                           | 31.66                                | 13.43          | 45.09                     | 74.00                     | -28.91         |
| 7386.000       | Average                        | 25.74                                | 13.43          | 39.17                     | 54.00                     | -14.83         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11b CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Horizontal           | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

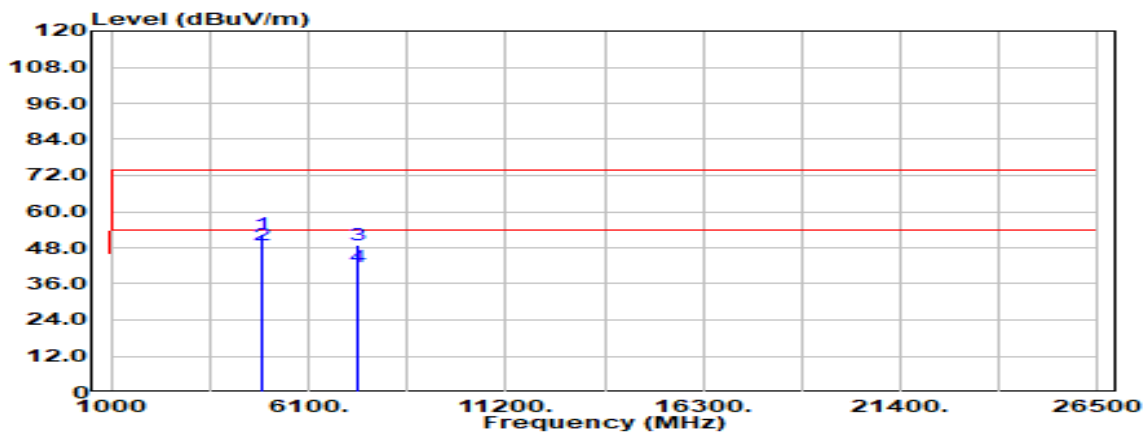


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 42.74                               | 9.63           | 52.37                    | 74.00                    | -21.63         |
| 4924.000       | Average                        | 39.37                               | 9.63           | 49.00                    | 54.00                    | -5.00          |
| 7386.000       | Peak                           | 35.67                               | 13.43          | 49.10                    | 74.00                    | -24.90         |
| 7386.000       | Average                        | 28.31                               | 13.43          | 41.74                    | 54.00                    | -12.26         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Vertical             | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

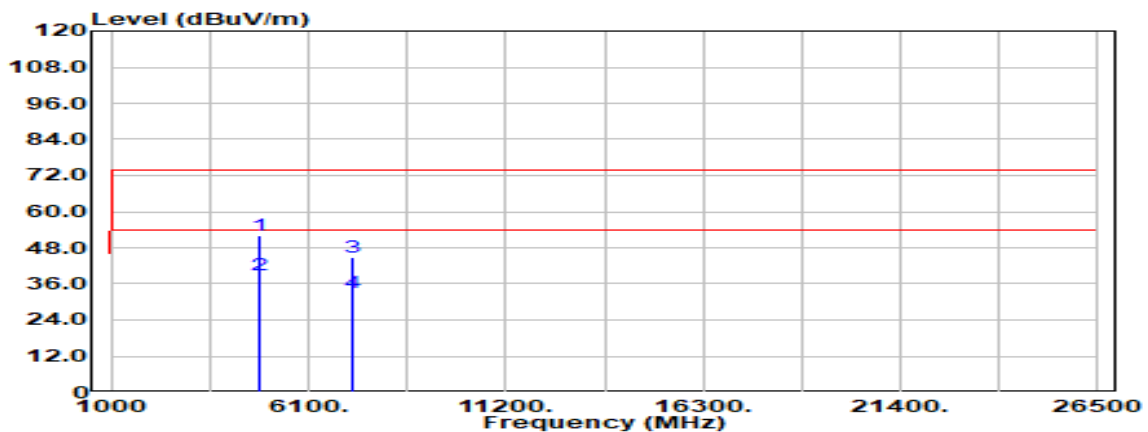


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 42.54                               | 9.53           | 52.07                    | 74.00                    | -21.93         |
| 4824.000       | Average                        | 29.43                               | 9.53           | 38.96                    | 54.00                    | -15.04         |
| 7236.000       | Peak                           | 31.39                               | 13.41          | 44.79                    | 74.00                    | -29.21         |
| 7236.000       | Average                        | 19.49                               | 13.41          | 32.90                    | 54.00                    | -21.10         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Horizontal           | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

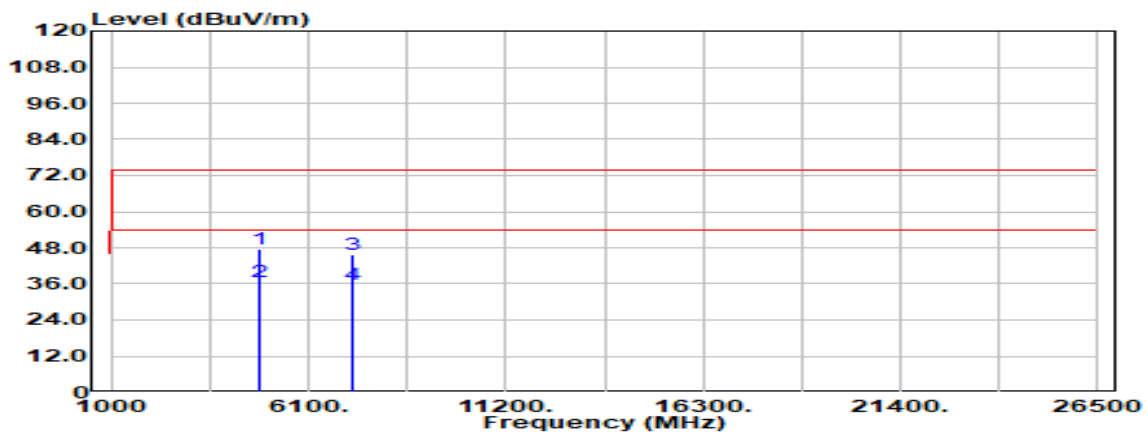


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 38.23                               | 9.53           | 47.76                    | 74.00                    | -26.24         |
| 4824.000       | Average                        | 27.27                               | 9.53           | 36.80                    | 54.00                    | -17.20         |
| 7236.000       | Peak                           | 32.20                               | 13.41          | 45.60                    | 74.00                    | -28.40         |
| 7236.000       | Average                        | 22.32                               | 13.41          | 35.73                    | 54.00                    | -18.27         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic             | Test Date     | March 24, 2022  |
| Polarize  | Vertical             | Test Engineer | Tony Chao       |
| Detector  | Peak and Average     |               |                 |

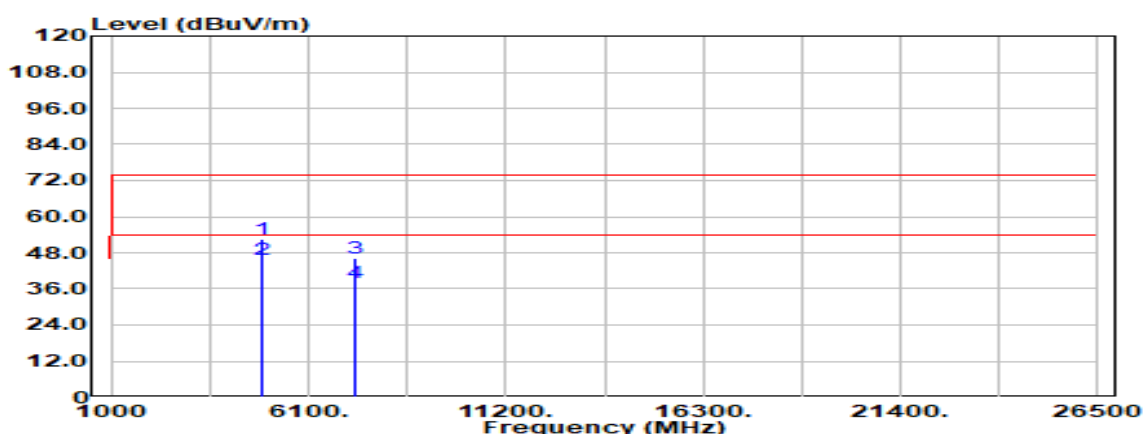


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 43.06                               | 9.60           | 52.66                    | 74.00                    | -21.34         |
| 4874.000       | Average                        | 36.07                               | 9.60           | 45.67                    | 54.00                    | -8.33          |
| 7311.000       | Peak                           | 32.88                               | 13.23          | 46.11                    | 74.00                    | -27.89         |
| 7311.000       | Average                        | 24.90                               | 13.23          | 38.13                    | 54.00                    | -15.87         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic             | Test Date     | March 24, 2022  |
| Polarize  | Horizontal           | Test Engineer | Tony Chao       |
| Detector  | Peak and Average     |               |                 |

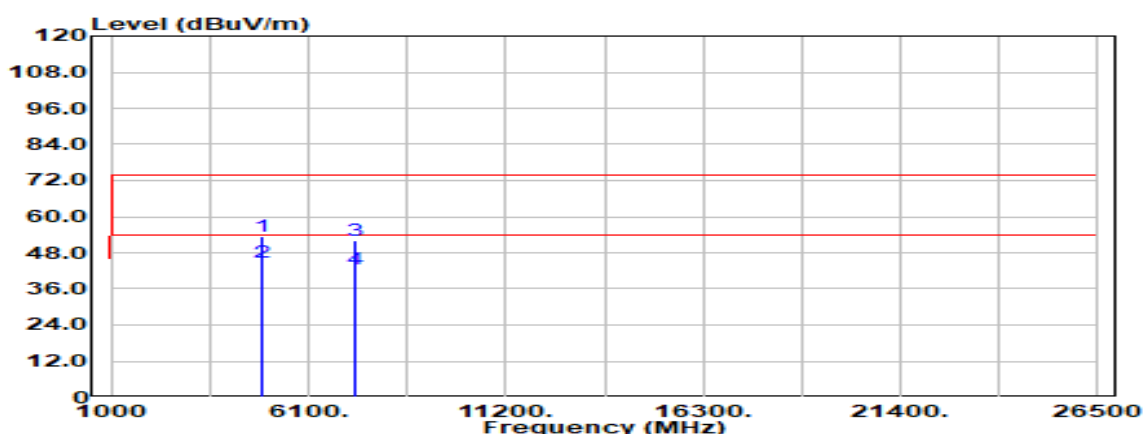


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 43.67                               | 9.60           | 53.27                    | 74.00                    | -20.73         |
| 4874.000       | Average                        | 35.28                               | 9.60           | 44.88                    | 54.00                    | -9.12          |
| 7311.000       | Peak                           | 39.03                               | 13.23          | 52.26                    | 74.00                    | -21.74         |
| 7311.000       | Average                        | 29.40                               | 13.23          | 42.63                    | 54.00                    | -11.37         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Vertical             | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

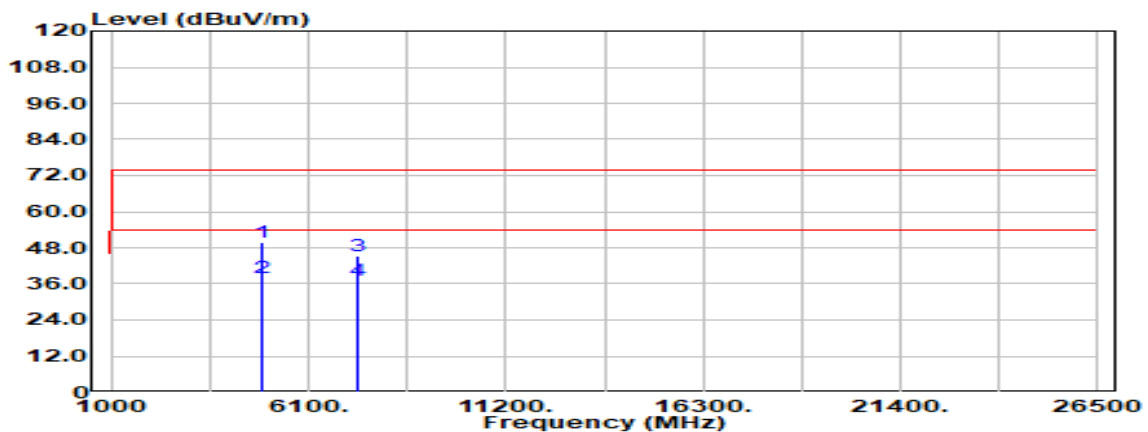


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 40.25                               | 9.63           | 49.88                    | 74.00                    | -24.12         |
| 4924.000       | Average                        | 28.44                               | 9.63           | 38.07                    | 54.00                    | -15.93         |
| 7386.000       | Peak                           | 31.87                               | 13.43          | 45.30                    | 74.00                    | -28.70         |
| 7386.000       | Average                        | 23.50                               | 13.43          | 36.93                    | 54.00                    | -17.07         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                      |               |                 |
|-----------|----------------------|---------------|-----------------|
| Test Mode | IEEE 802.11g CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic             | Test Date     | March 27, 2022  |
| Polarize  | Horizontal           | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average     |               |                 |

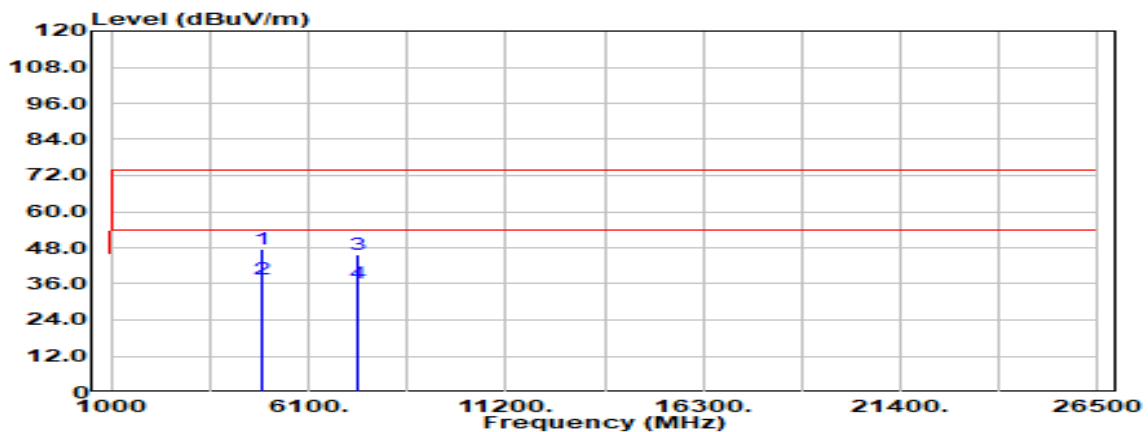


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 37.99                               | 9.63           | 47.62                    | 74.00                    | -26.38         |
| 4924.000       | Average                        | 27.86                               | 9.63           | 37.49                    | 54.00                    | -16.51         |
| 7386.000       | Peak                           | 32.46                               | 13.43          | 45.89                    | 74.00                    | -28.11         |
| 7386.000       | Average                        | 22.85                               | 13.43          | 36.28                    | 54.00                    | -17.72         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Vertical                          | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

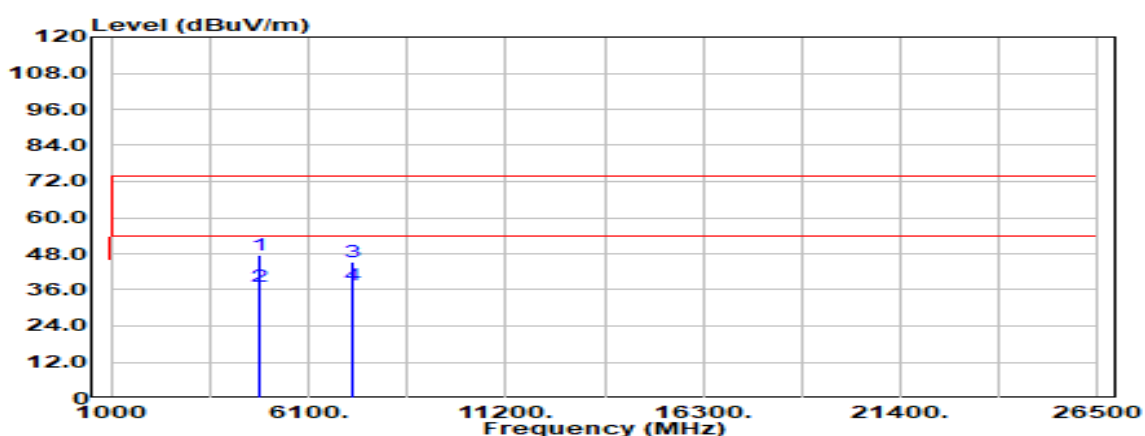


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 37.98                               | 9.53           | 47.50                    | 74.00                    | -26.50         |
| 4824.000       | Average                        | 27.51                               | 9.53           | 37.04                    | 54.00                    | -16.96         |
| 7236.000       | Peak                           | 32.08                               | 13.41          | 45.49                    | 74.00                    | -28.51         |
| 7236.000       | Average                        | 24.39                               | 13.41          | 37.80                    | 54.00                    | -16.20         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

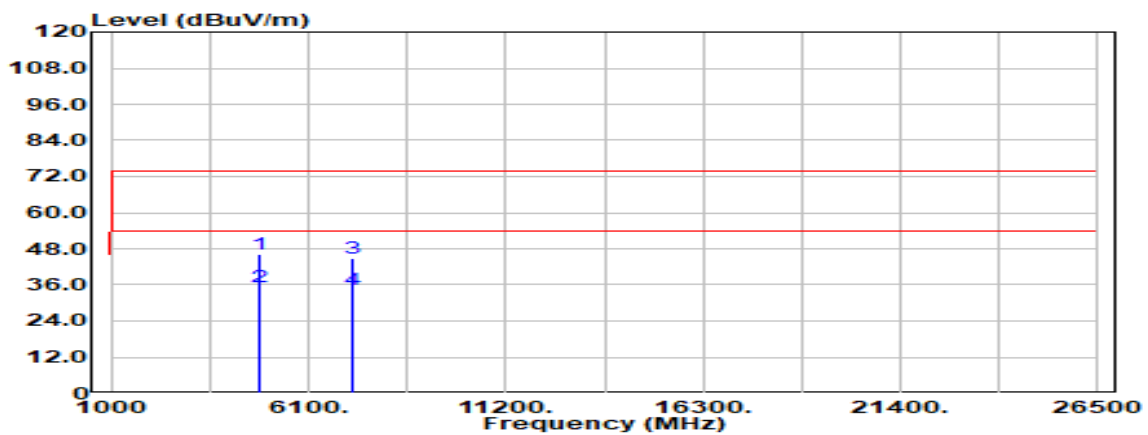


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 36.86                               | 9.53           | 46.39                    | 74.00                    | -27.61         |
| 4824.000       | Average                        | 25.62                               | 9.53           | 35.15                    | 54.00                    | -18.85         |
| 7236.000       | Peak                           | 31.58                               | 13.41          | 44.99                    | 74.00                    | -29.01         |
| 7236.000       | Average                        | 21.13                               | 13.41          | 34.54                    | 54.00                    | -19.46         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic                          | Test Date     | March 24, 2022  |
| Polarize  | Vertical                          | Test Engineer | Tony Chao       |
| Detector  | Peak and Average                  |               |                 |

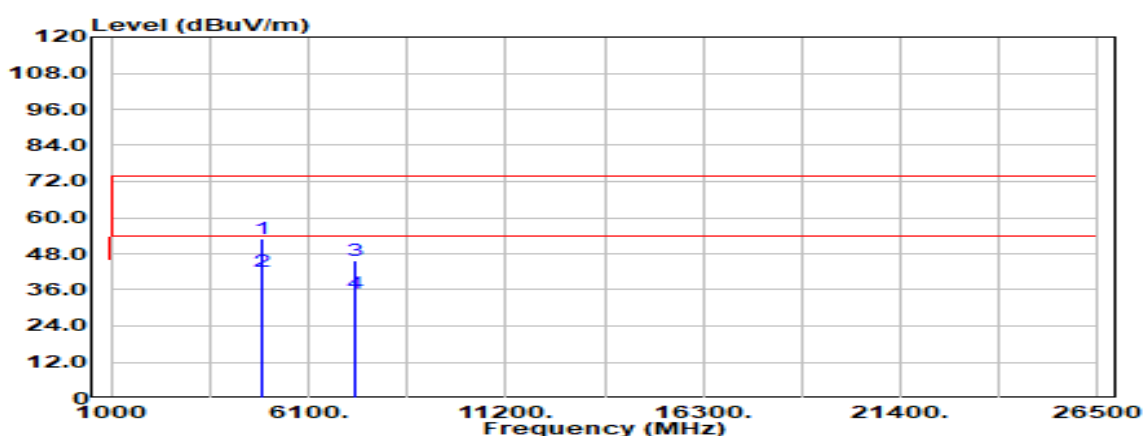


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 43.57                               | 9.60           | 53.17                    | 74.00                    | -20.83         |
| 4874.000       | Average                        | 32.47                               | 9.60           | 42.07                    | 54.00                    | -11.93         |
| 7311.000       | Peak                           | 32.29                               | 13.23          | 45.53                    | 74.00                    | -28.47         |
| 7311.000       | Average                        | 21.42                               | 13.23          | 34.65                    | 54.00                    | -19.35         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic                          | Test Date     | March 24, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Tony Chao       |
| Detector  | Peak and Average                  |               |                 |

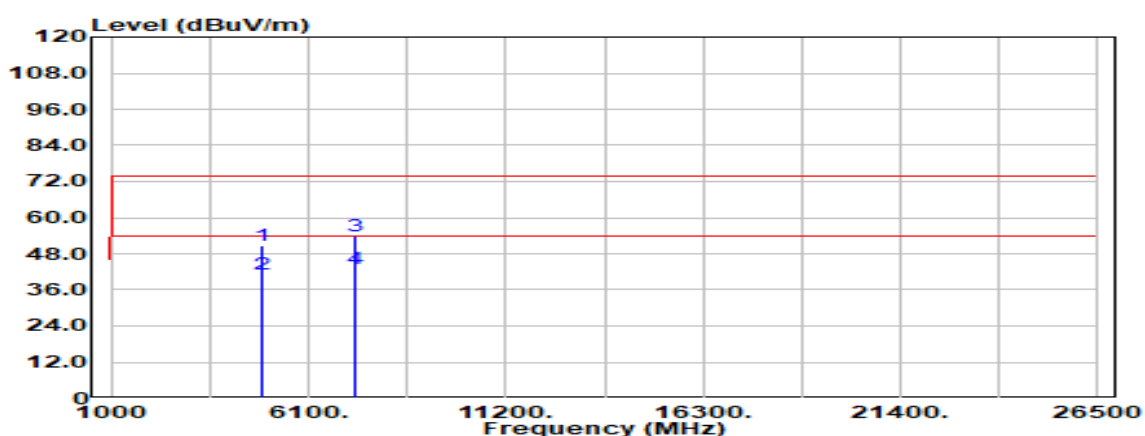


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 41.21                               | 9.60           | 50.80                    | 74.00                    | -23.20         |
| 4874.000       | Average                        | 31.72                               | 9.60           | 41.32                    | 54.00                    | -12.68         |
| 7311.000       | Peak                           | 40.69                               | 13.23          | 53.92                    | 74.00                    | -20.08         |
| 7311.000       | Average                        | 29.97                               | 13.23          | 43.20                    | 54.00                    | -10.80         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Vertical                          | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

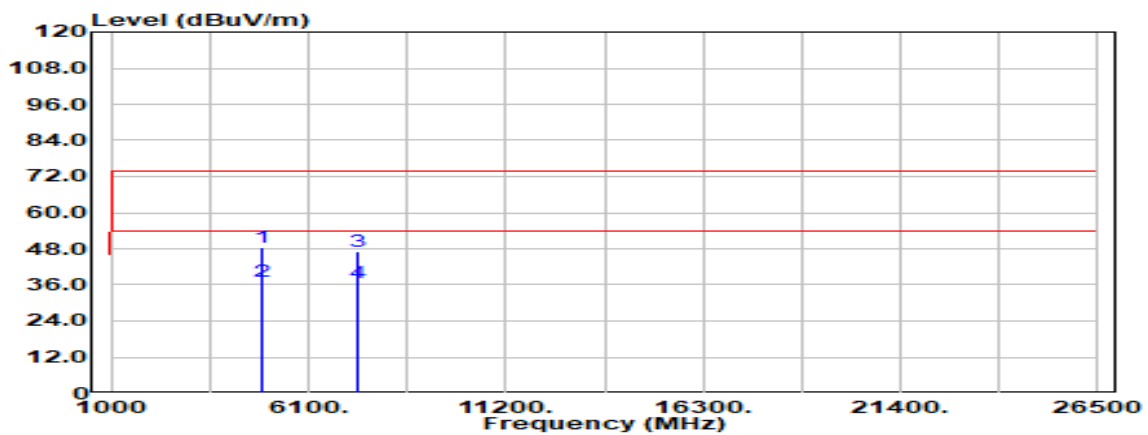


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 38.96                               | 9.63           | 48.59                    | 74.00                    | -25.41         |
| 4924.000       | Average                        | 27.29                               | 9.63           | 36.92                    | 54.00                    | -17.08         |
| 7386.000       | Peak                           | 33.78                               | 13.43          | 47.21                    | 74.00                    | -26.79         |
| 7386.000       | Average                        | 23.22                               | 13.43          | 36.65                    | 54.00                    | -17.35         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

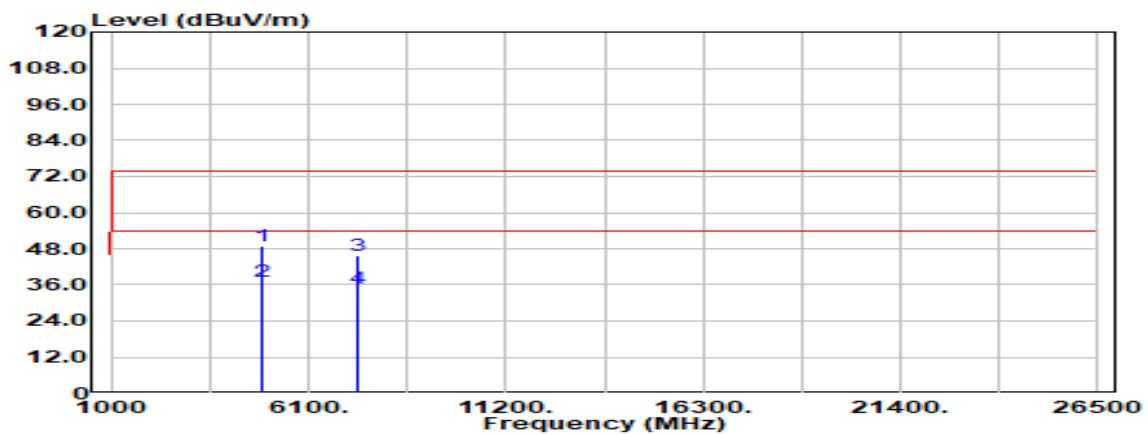


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4924.000       | Peak                           | 39.47                                | 9.63           | 49.09                     | 74.00                     | -24.91         |
| 4924.000       | Average                        | 27.59                                | 9.63           | 37.22                     | 54.00                     | -16.78         |
| 7386.000       | Peak                           | 32.13                                | 13.43          | 45.56                     | 74.00                     | -28.44         |
| 7386.000       | Average                        | 21.66                                | 13.43          | 35.09                     | 54.00                     | -18.91         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Vertical                          | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

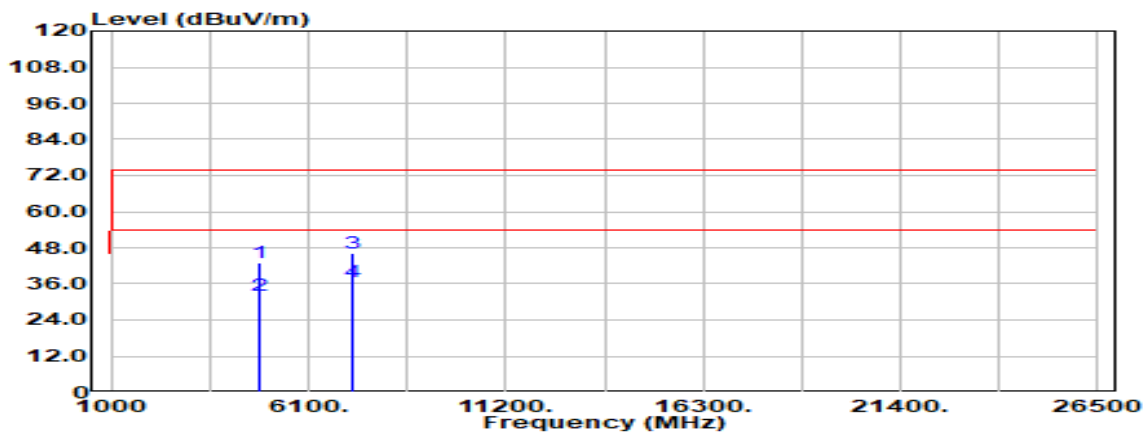


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 33.23                               | 9.59           | 42.82                    | 74.00                    | -31.18         |
| 4844.000       | Average                        | 22.71                               | 9.59           | 32.30                    | 54.00                    | -21.70         |
| 7266.000       | Peak                           | 32.79                               | 13.32          | 46.11                    | 74.00                    | -27.89         |
| 7266.000       | Average                        | 23.31                               | 13.32          | 36.63                    | 54.00                    | -17.37         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

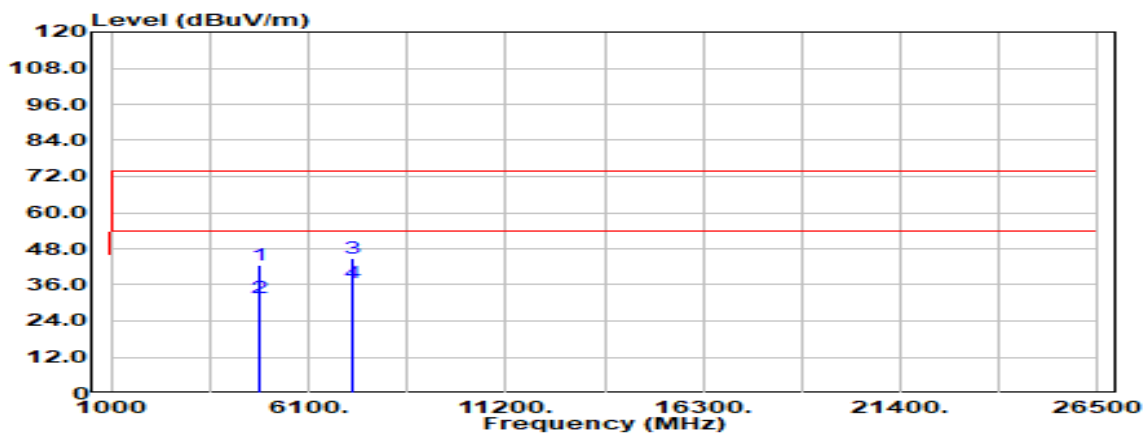


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4844.000       | Peak                           | 33.04                                | 9.59           | 42.63                     | 74.00                     | -31.37         |
| 4844.000       | Average                        | 22.09                                | 9.59           | 31.68                     | 54.00                     | -22.32         |
| 7266.000       | Peak                           | 31.59                                | 13.32          | 44.91                     | 74.00                     | -29.09         |
| 7266.000       | Average                        | 23.34                                | 13.32          | 36.66                     | 54.00                     | -17.34         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2437 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Vertical                          | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

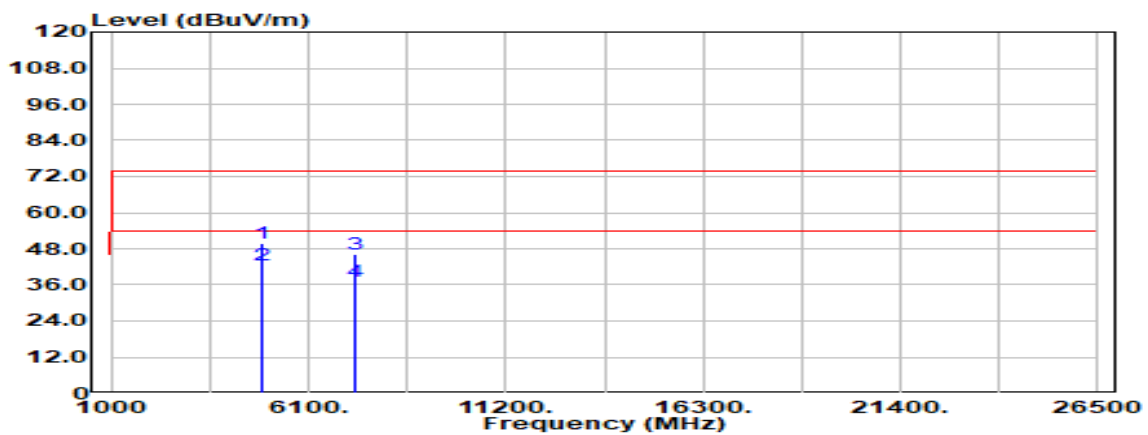


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 40.28                               | 9.60           | 49.87                    | 74.00                    | -24.13         |
| 4874.000       | Average                        | 33.15                               | 9.60           | 42.75                    | 54.00                    | -11.25         |
| 7311.000       | Peak                           | 32.89                               | 13.23          | 46.12                    | 74.00                    | -27.88         |
| 7311.000       | Average                        | 23.80                               | 13.23          | 37.03                    | 54.00                    | -16.97         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2437 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

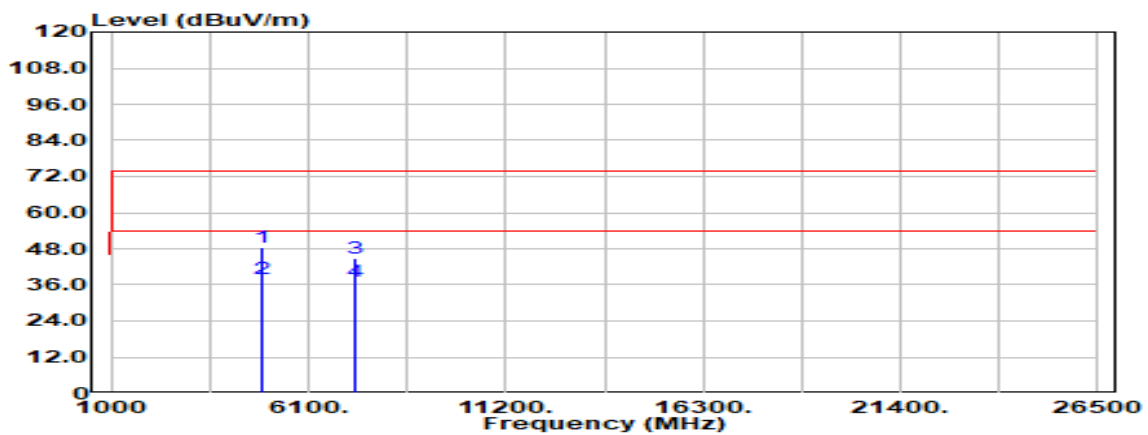


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 38.79                               | 9.60           | 48.38                    | 74.00                    | -25.62         |
| 4874.000       | Average                        | 28.44                               | 9.60           | 38.04                    | 54.00                    | -15.96         |
| 7311.000       | Peak                           | 31.74                               | 13.23          | 44.97                    | 74.00                    | -29.03         |
| 7311.000       | Average                        | 23.69                               | 13.23          | 36.92                    | 54.00                    | -17.08         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Vertical                          | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

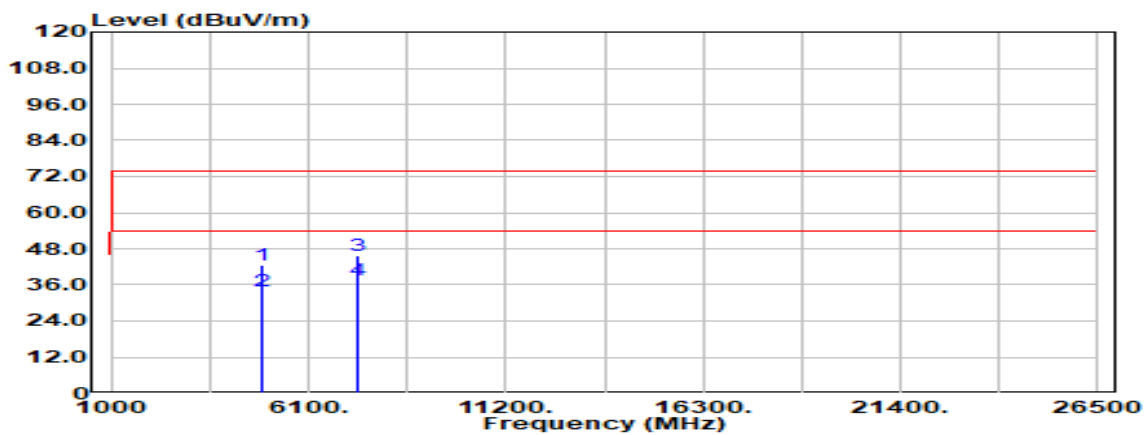


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 32.89                               | 9.59           | 42.47                    | 74.00                    | -31.53         |
| 4904.000       | Average                        | 24.52                               | 9.59           | 34.11                    | 54.00                    | -19.89         |
| 7356.000       | Peak                           | 32.49                               | 13.28          | 45.77                    | 74.00                    | -28.23         |
| 7356.000       | Average                        | 24.31                               | 13.28          | 37.59                    | 54.00                    | -16.41         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                          | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                  |               |                 |

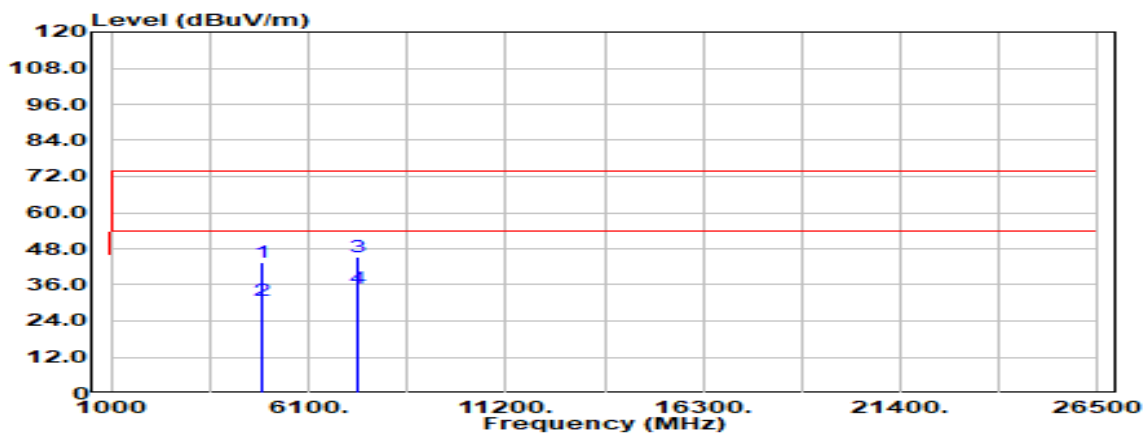


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 33.74                               | 9.59           | 43.32                    | 74.00                    | -30.68         |
| 4904.000       | Average                        | 21.41                               | 9.59           | 31.00                    | 54.00                    | -23.00         |
| 7356.000       | Peak                           | 31.91                               | 13.28          | 45.19                    | 74.00                    | -28.81         |
| 7356.000       | Average                        | 21.49                               | 13.28          | 34.77                    | 54.00                    | -19.23         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Vertical                         | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

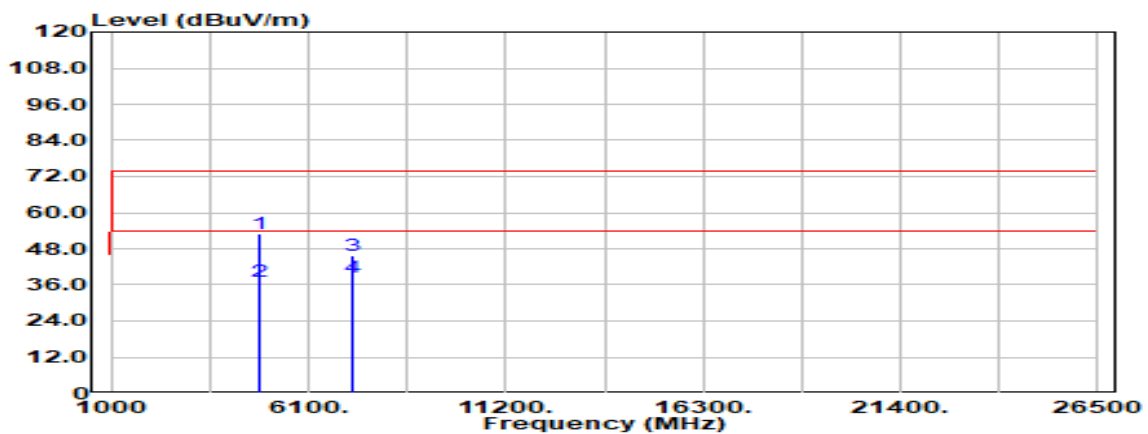


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 43.25                               | 9.53           | 52.78                    | 74.00                    | -21.22         |
| 4824.000       | Average                        | 27.41                               | 9.53           | 36.94                    | 54.00                    | -17.06         |
| 7236.000       | Peak                           | 32.54                               | 13.41          | 45.95                    | 74.00                    | -28.05         |
| 7236.000       | Average                        | 24.96                               | 13.41          | 38.37                    | 54.00                    | -15.63         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

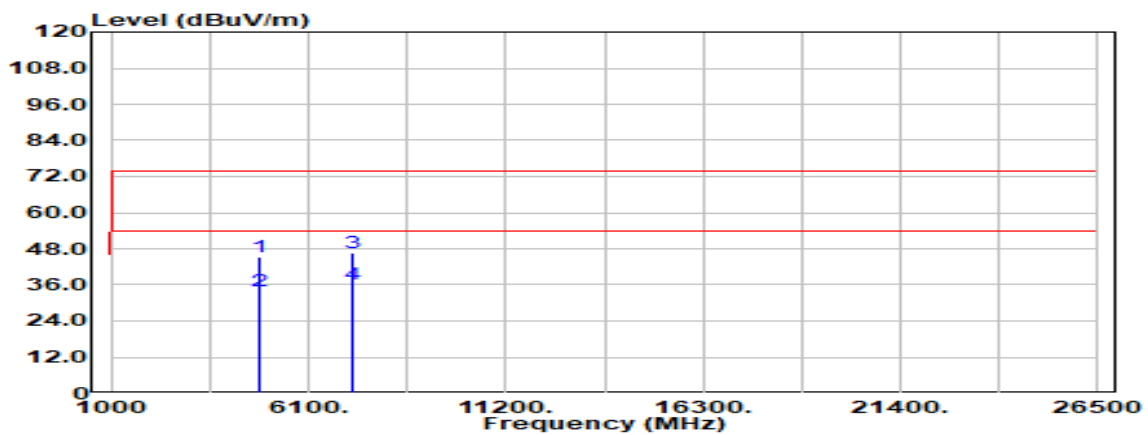


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 35.59                               | 9.53           | 45.11                    | 74.00                    | -28.89         |
| 4824.000       | Average                        | 24.55                               | 9.53           | 34.08                    | 54.00                    | -19.92         |
| 7236.000       | Peak                           | 33.05                               | 13.41          | 46.46                    | 74.00                    | -27.54         |
| 7236.000       | Average                        | 22.61                               | 13.41          | 36.02                    | 54.00                    | -17.98         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic                         | Test Date     | March 24, 2022  |
| Polarize  | Vertical                         | Test Engineer | Tony Chao       |
| Detector  | Peak and Average                 |               |                 |

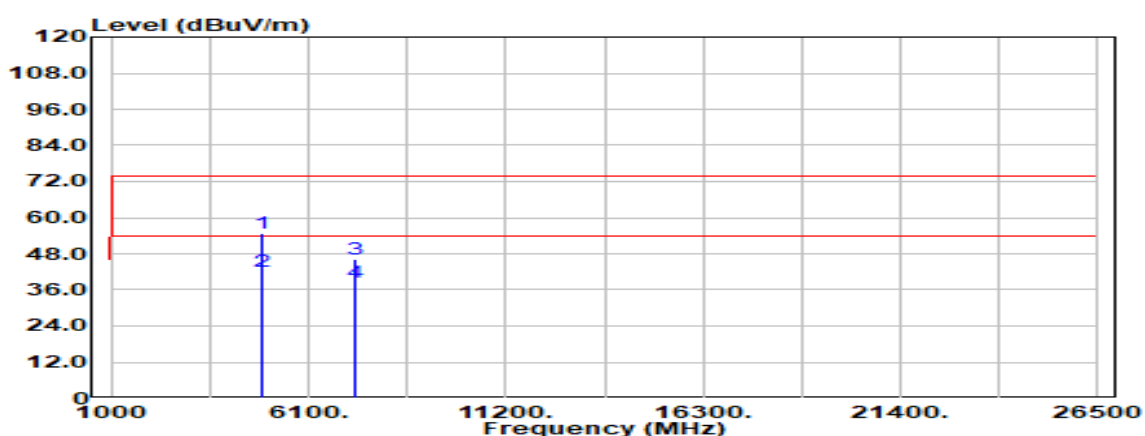


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 45.04                               | 9.60           | 54.64                    | 74.00                    | -19.36         |
| 4874.000       | Average                        | 32.49                               | 9.60           | 42.09                    | 54.00                    | -11.91         |
| 7311.000       | Peak                           | 32.82                               | 13.23          | 46.06                    | 74.00                    | -27.94         |
| 7311.000       | Average                        | 25.10                               | 13.23          | 38.33                    | 54.00                    | -15.67         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2437 | Temp/Hum      | 23.3(°C)/ 53%RH |
| Test Item | Harmonic                         | Test Date     | March 24, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Tony Chao       |
| Detector  | Peak and Average                 |               |                 |

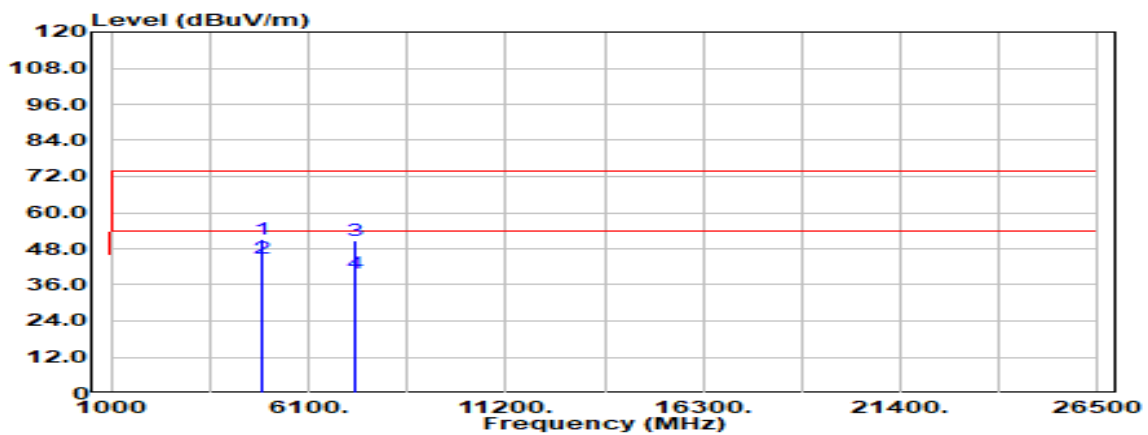


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 41.48                               | 9.60           | 51.08                    | 74.00                    | -22.92         |
| 4874.000       | Average                        | 35.30                               | 9.60           | 44.90                    | 54.00                    | -9.10          |
| 7311.000       | Peak                           | 37.50                               | 13.23          | 50.73                    | 74.00                    | -23.27         |
| 7311.000       | Average                        | 26.81                               | 13.23          | 40.04                    | 54.00                    | -13.96         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Vertical                         | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

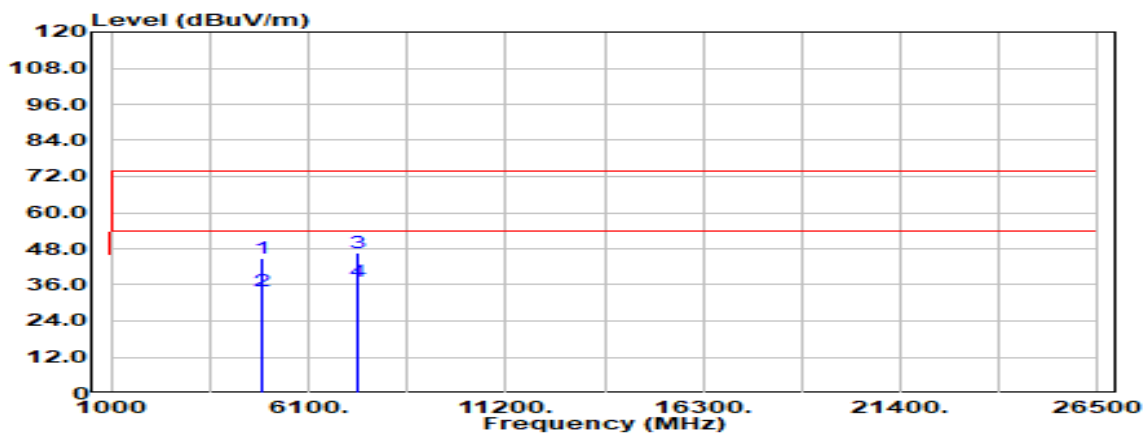


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 35.25                               | 9.63           | 44.88                    | 74.00                    | -29.12         |
| 4924.000       | Average                        | 24.27                               | 9.63           | 33.90                    | 54.00                    | -20.10         |
| 7386.000       | Peak                           | 33.03                               | 13.43          | 46.46                    | 74.00                    | -27.54         |
| 7386.000       | Average                        | 23.66                               | 13.43          | 37.09                    | 54.00                    | -16.91         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

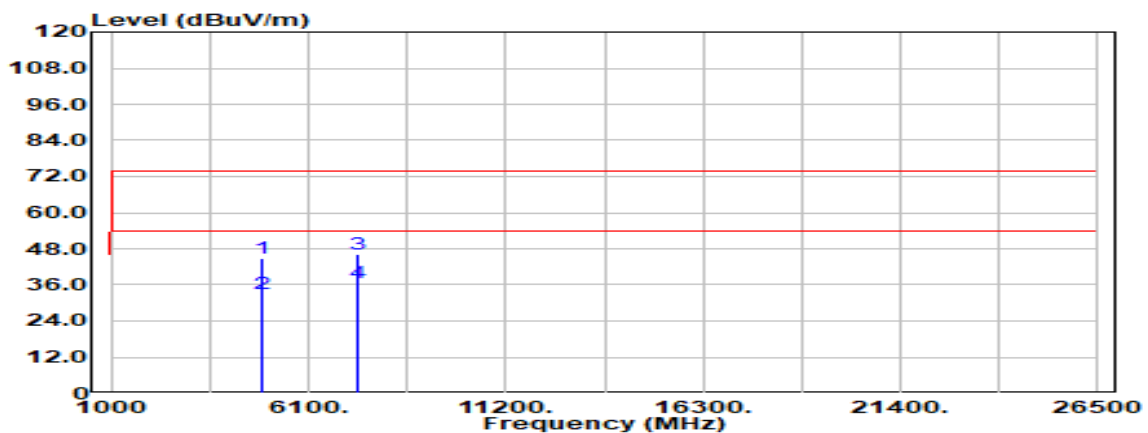


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4924.000       | Peak                           | 35.34                                | 9.63           | 44.97                     | 74.00                     | -29.03         |
| 4924.000       | Average                        | 23.63                                | 9.63           | 33.26                     | 54.00                     | -20.74         |
| 7386.000       | Peak                           | 32.70                                | 13.43          | 46.13                     | 74.00                     | -27.87         |
| 7386.000       | Average                        | 23.40                                | 13.43          | 36.83                     | 54.00                     | -17.17         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Vertical                         | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

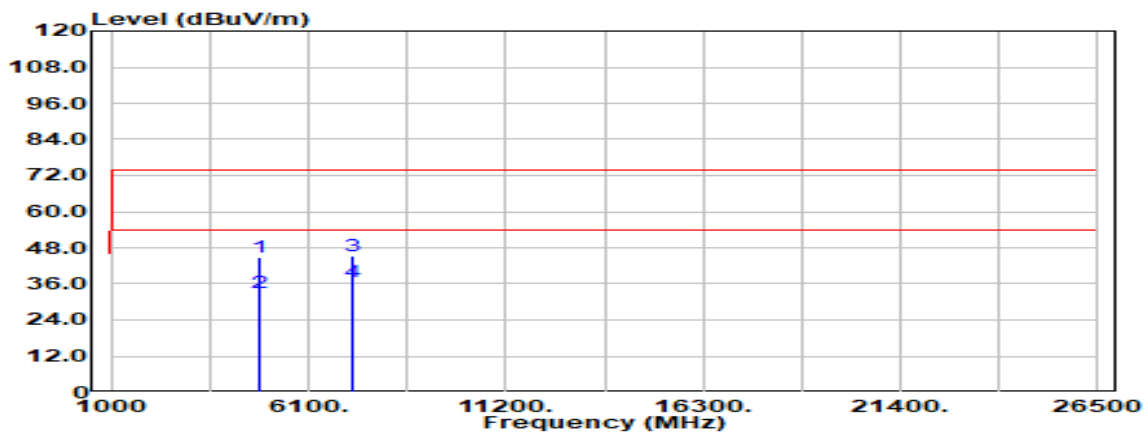


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 35.03                               | 9.59           | 44.62                    | 74.00                    | -29.38         |
| 4844.000       | Average                        | 23.24                               | 9.59           | 32.83                    | 54.00                    | -21.17         |
| 7266.000       | Peak                           | 32.00                               | 13.32          | 45.32                    | 74.00                    | -28.68         |
| 7266.000       | Average                        | 23.31                               | 13.32          | 36.63                    | 54.00                    | -17.37         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

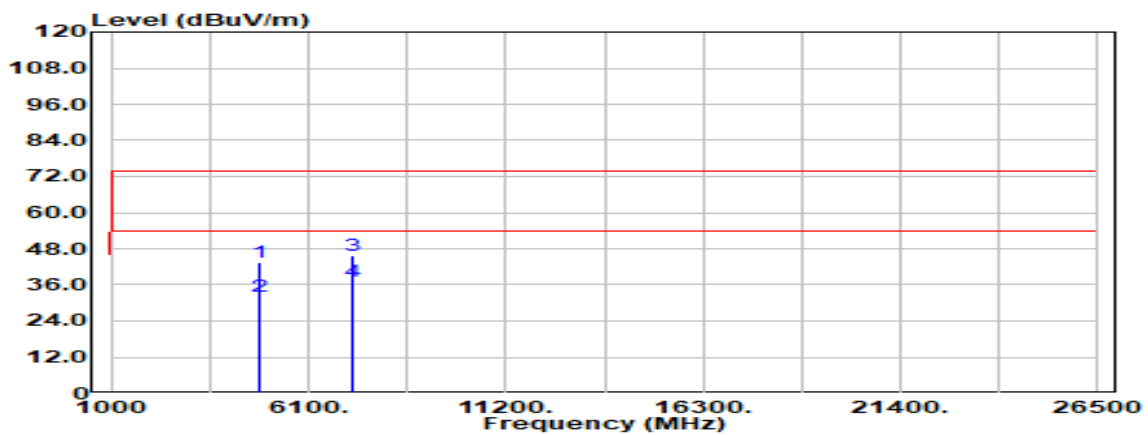


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 33.76                               | 9.59           | 43.35                    | 74.00                    | -30.65         |
| 4844.000       | Average                        | 22.36                               | 9.59           | 31.95                    | 54.00                    | -22.05         |
| 7266.000       | Peak                           | 32.63                               | 13.32          | 45.95                    | 74.00                    | -28.05         |
| 7266.000       | Average                        | 23.62                               | 13.32          | 36.94                    | 54.00                    | -17.06         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2437 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Vertical                         | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

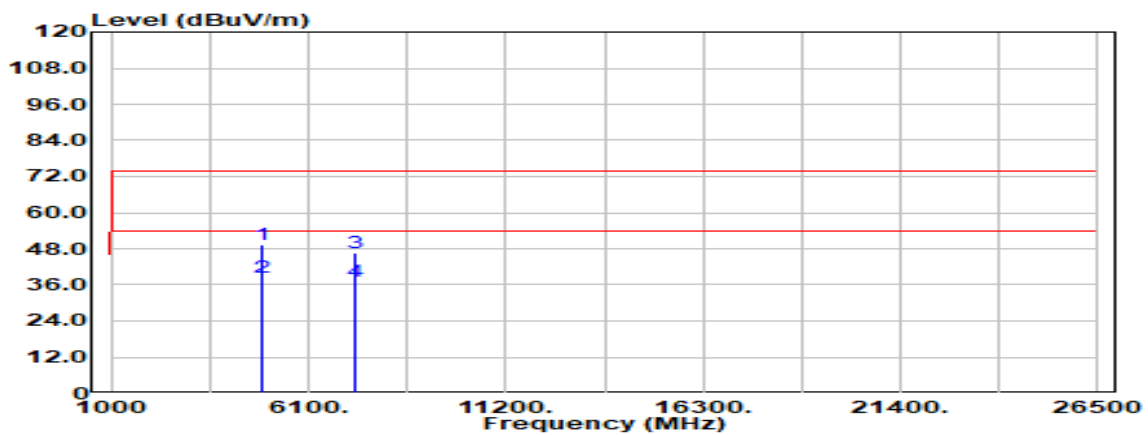


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 39.75                               | 9.60           | 49.35                    | 74.00                    | -24.65         |
| 4874.000       | Average                        | 29.12                               | 9.60           | 38.72                    | 54.00                    | -15.28         |
| 7311.000       | Peak                           | 33.20                               | 13.23          | 46.44                    | 74.00                    | -27.56         |
| 7311.000       | Average                        | 23.94                               | 13.23          | 37.17                    | 54.00                    | -16.83         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2437 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

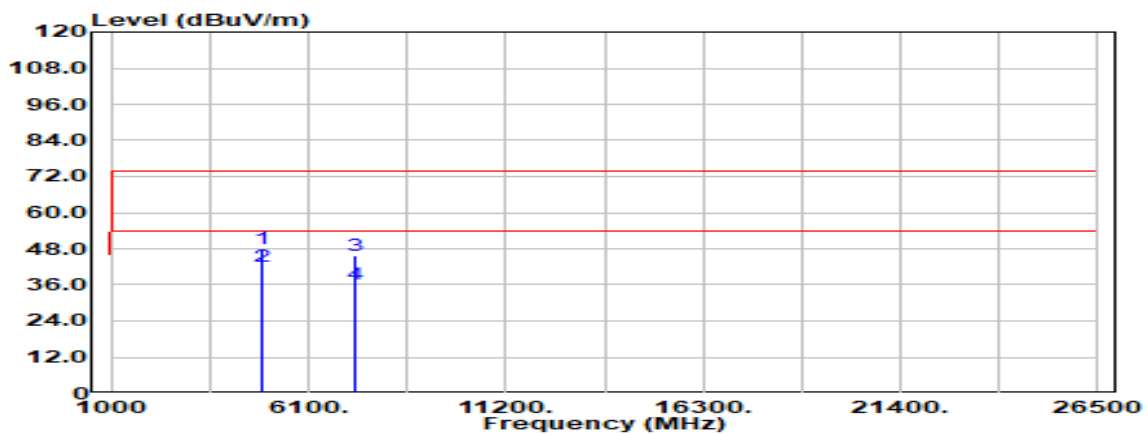


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 38.40                               | 9.60           | 47.99                    | 74.00                    | -26.01         |
| 4874.000       | Average                        | 32.37                               | 9.60           | 41.97                    | 54.00                    | -12.03         |
| 7311.000       | Peak                           | 32.47                               | 13.23          | 45.70                    | 74.00                    | -28.30         |
| 7311.000       | Average                        | 23.01                               | 13.23          | 36.24                    | 54.00                    | -17.76         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Vertical                         | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

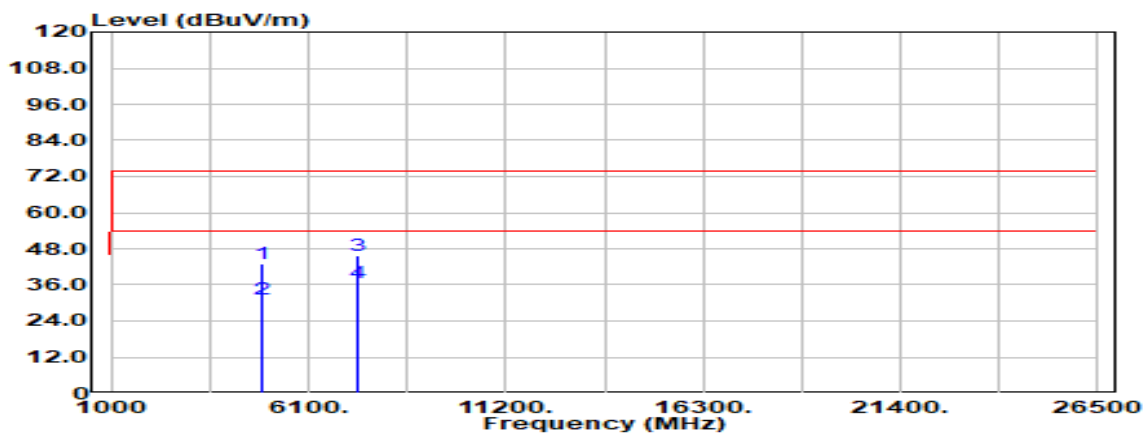


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 33.62                               | 9.59           | 43.21                    | 74.00                    | -30.79         |
| 4904.000       | Average                        | 21.59                               | 9.59           | 31.18                    | 54.00                    | -22.82         |
| 7356.000       | Peak                           | 32.54                               | 13.28          | 45.82                    | 74.00                    | -28.18         |
| 7356.000       | Average                        | 23.55                               | 13.28          | 36.83                    | 54.00                    | -17.17         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452 | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Harmonic                         | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Czerny Lin      |
| Detector  | Peak and Average                 |               |                 |

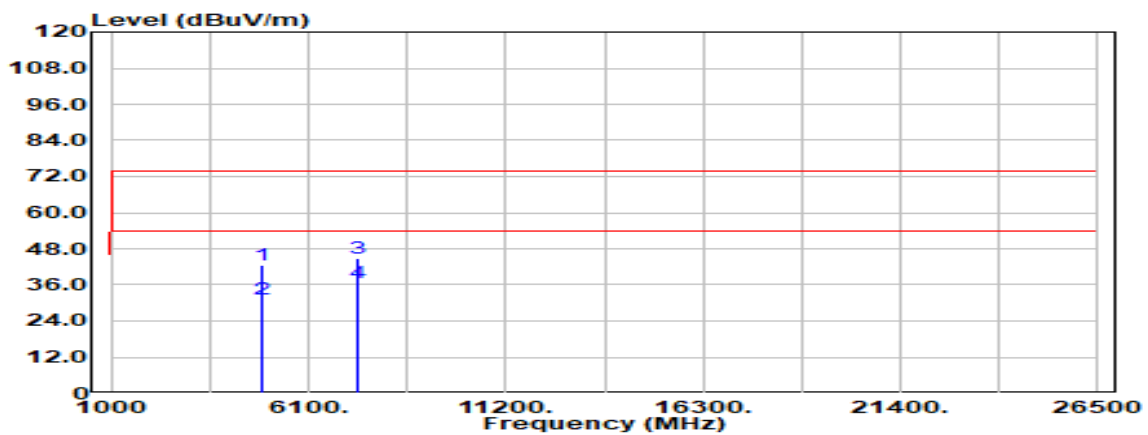


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 33.14                               | 9.59           | 42.73                    | 74.00                    | -31.27         |
| 4904.000       | Average                        | 21.63                               | 9.59           | 31.22                    | 54.00                    | -22.78         |
| 7356.000       | Peak                           | 31.61                               | 13.28          | 44.89                    | 74.00                    | -29.11         |
| 7356.000       | Average                        | 23.18                               | 13.28          | 36.46                    | 54.00                    | -17.54         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**BFM ON**

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

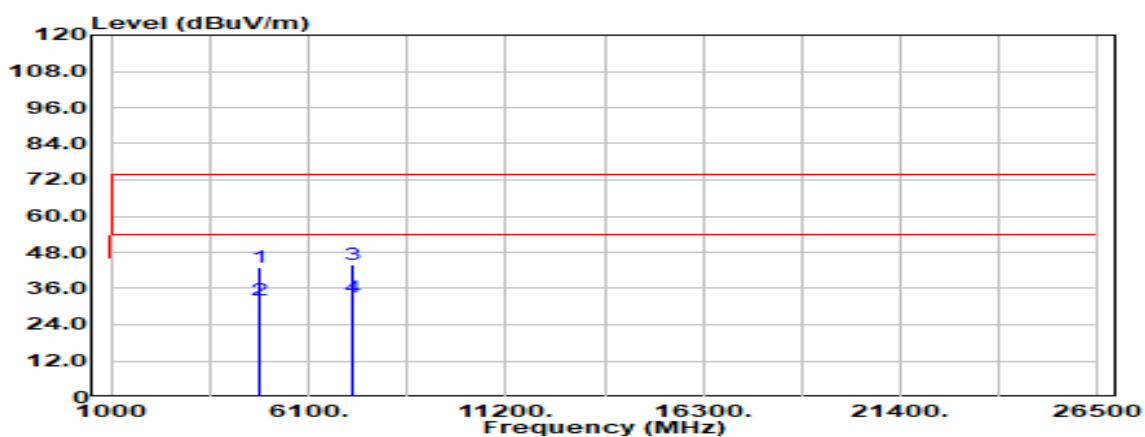


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 33.68                               | 9.53           | 43.20                    | 74.00                    | -30.80         |
| 4824.000       | Average                        | 22.61                               | 9.53           | 32.14                    | 54.00                    | -21.86         |
| 7236.000       | Peak                           | 30.72                               | 13.41          | 44.12                    | 74.00                    | -29.88         |
| 7236.000       | Average                        | 19.82                               | 13.41          | 33.22                    | 54.00                    | -20.78         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2412 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

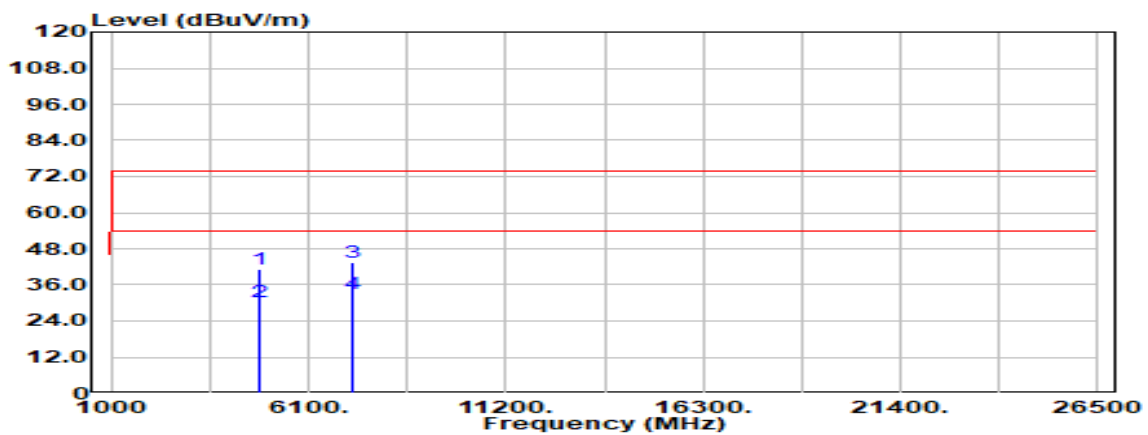

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 31.77                               | 9.53           | 41.30                    | 74.00                    | -32.70         |
| 4824.000       | Average                        | 20.84                               | 9.53           | 30.37                    | 54.00                    | -23.63         |
| 7236.000       | Peak                           | 30.02                               | 13.41          | 43.42                    | 74.00                    | -30.58         |
| 7236.000       | Average                        | 19.66                               | 13.41          | 33.07                    | 54.00                    | -20.93         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.




Report No.: TMWK2201000110KR

Page: 269 / 290

Rev.: 00

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

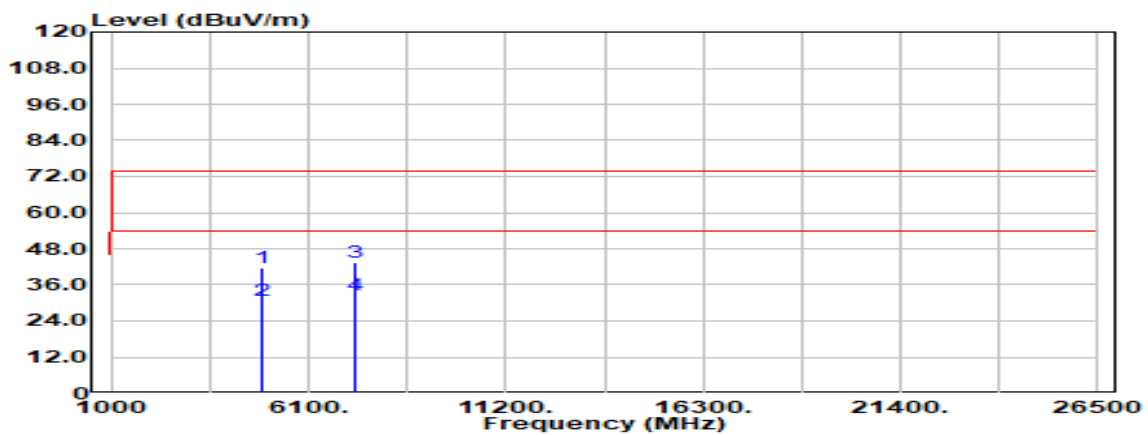


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 32.15                               | 9.60           | 41.75                    | 74.00                    | -32.25         |
| 4874.000       | Average                        | 21.07                               | 9.60           | 30.67                    | 54.00                    | -23.33         |
| 7311.000       | Peak                           | 30.31                               | 13.23          | 43.55                    | 74.00                    | -30.45         |
| 7311.000       | Average                        | 19.40                               | 13.23          | 32.64                    | 54.00                    | -21.36         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

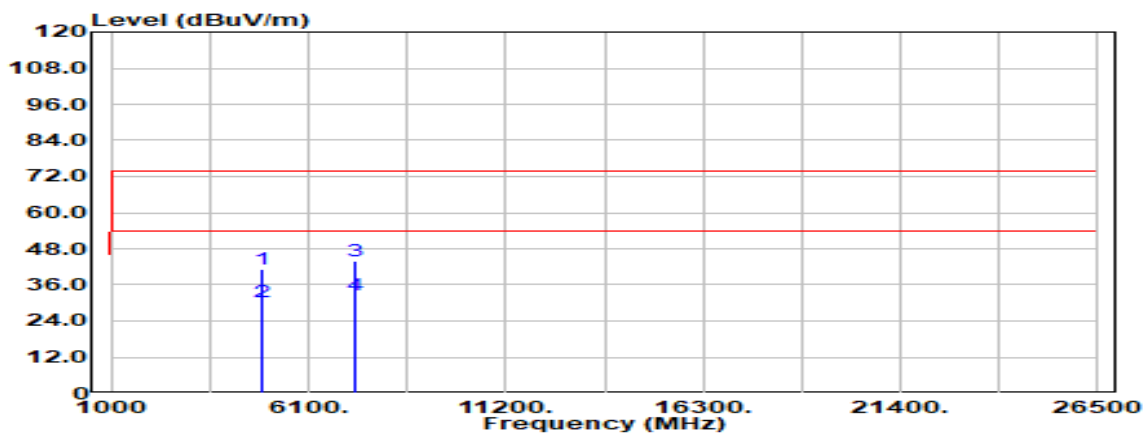


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 31.53                               | 9.60           | 41.13                    | 74.00                    | -32.87         |
| 4874.000       | Average                        | 20.60                               | 9.60           | 30.20                    | 54.00                    | -23.80         |
| 7311.000       | Peak                           | 30.87                               | 13.23          | 44.11                    | 74.00                    | -29.89         |
| 7311.000       | Average                        | 19.29                               | 13.23          | 32.52                    | 54.00                    | -21.48         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

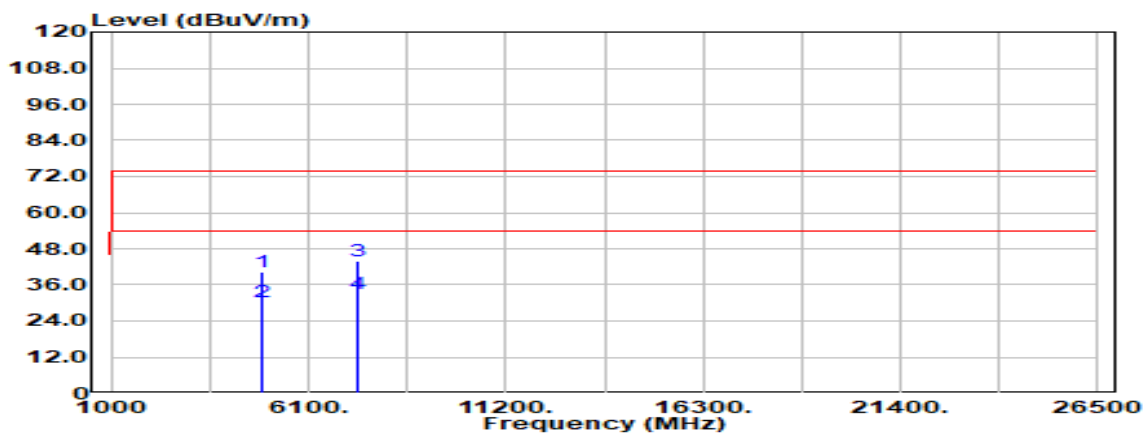


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 30.68                               | 9.63           | 40.31                    | 74.00                    | -33.69         |
| 4924.000       | Average                        | 20.55                               | 9.63           | 30.18                    | 54.00                    | -23.82         |
| 7386.000       | Peak                           | 30.49                               | 13.43          | 43.92                    | 74.00                    | -30.08         |
| 7386.000       | Average                        | 19.63                               | 13.43          | 33.06                    | 54.00                    | -20.94         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT20)<br>CH 2462 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

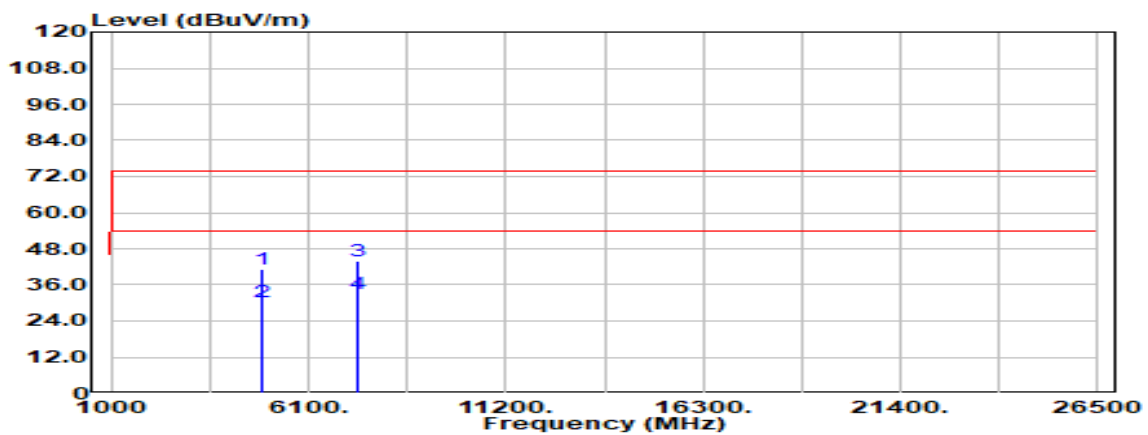


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 31.54                               | 9.63           | 41.17                    | 74.00                    | -32.83         |
| 4924.000       | Average                        | 20.62                               | 9.63           | 30.25                    | 54.00                    | -23.75         |
| 7386.000       | Peak                           | 30.46                               | 13.43          | 43.89                    | 74.00                    | -30.11         |
| 7386.000       | Average                        | 19.60                               | 13.43          | 33.03                    | 54.00                    | -20.97         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

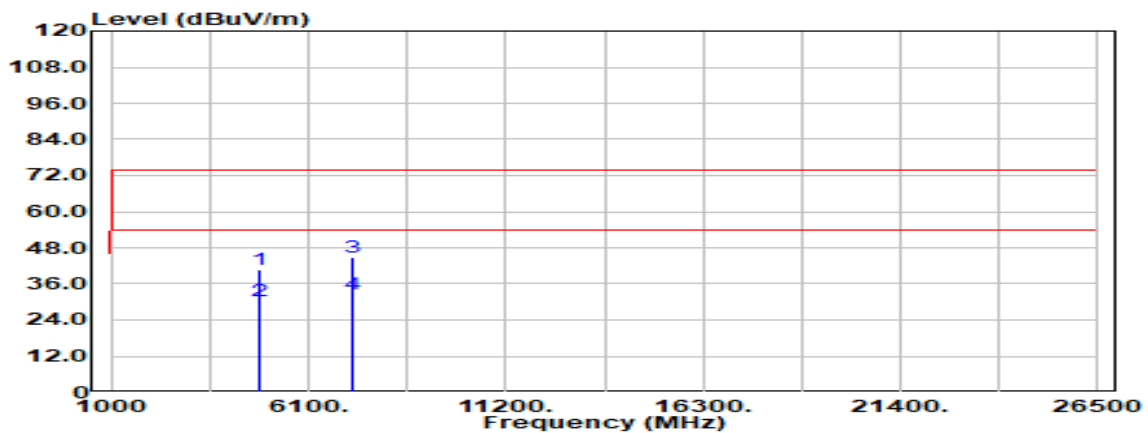


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 31.04                               | 9.59           | 40.63                    | 74.00                    | -33.37         |
| 4844.000       | Average                        | 20.81                               | 9.59           | 30.40                    | 54.00                    | -23.60         |
| 7266.000       | Peak                           | 31.30                               | 13.32          | 44.61                    | 74.00                    | -29.39         |
| 7266.000       | Average                        | 19.39                               | 13.32          | 32.71                    | 54.00                    | -21.29         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2422 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

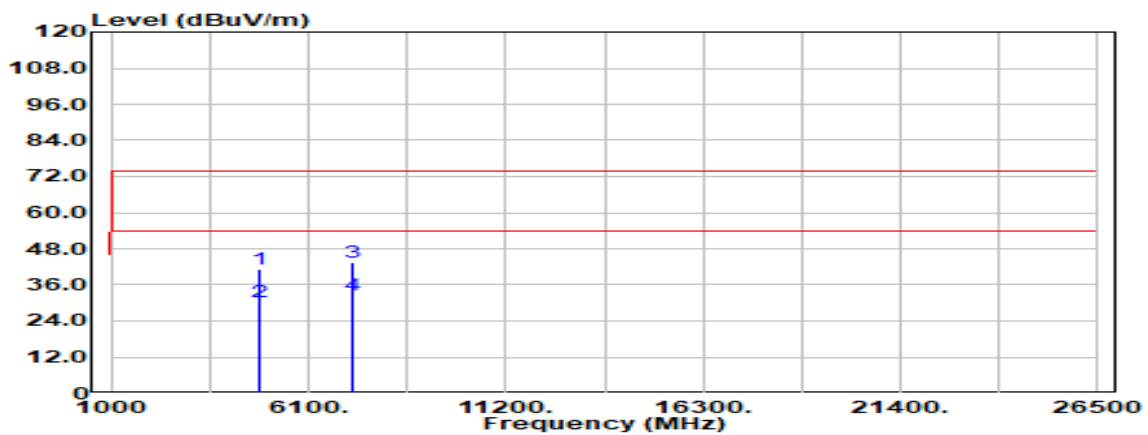


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 31.84                               | 9.59           | 41.43                    | 74.00                    | -32.57         |
| 4844.000       | Average                        | 20.82                               | 9.59           | 30.41                    | 54.00                    | -23.59         |
| 7266.000       | Peak                           | 30.31                               | 13.32          | 43.63                    | 74.00                    | -30.37         |
| 7266.000       | Average                        | 19.40                               | 13.32          | 32.72                    | 54.00                    | -21.28         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

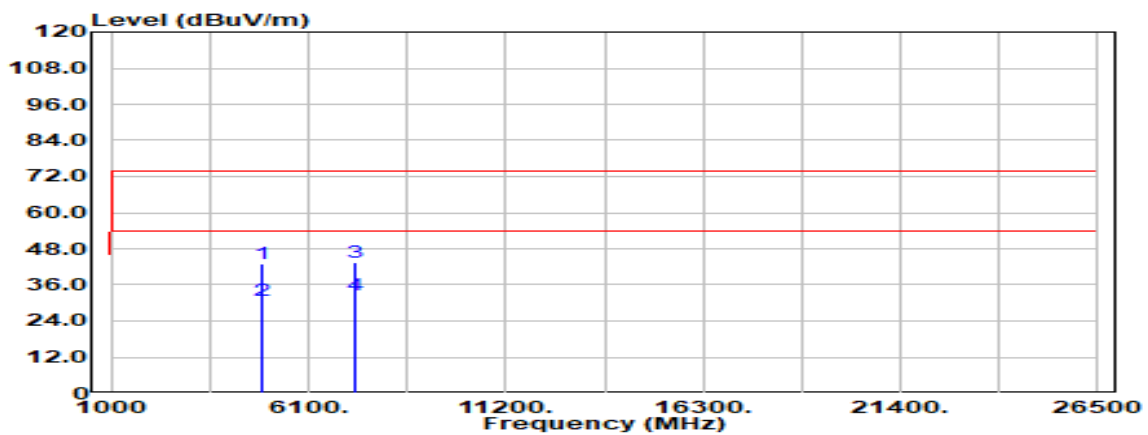


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 33.29                               | 9.60           | 42.89                    | 74.00                    | -31.11         |
| 4874.000       | Average                        | 21.29                               | 9.60           | 30.88                    | 54.00                    | -23.12         |
| 7311.000       | Peak                           | 30.05                               | 13.23          | 43.28                    | 74.00                    | -30.72         |
| 7311.000       | Average                        | 19.27                               | 13.23          | 32.51                    | 54.00                    | -21.49         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

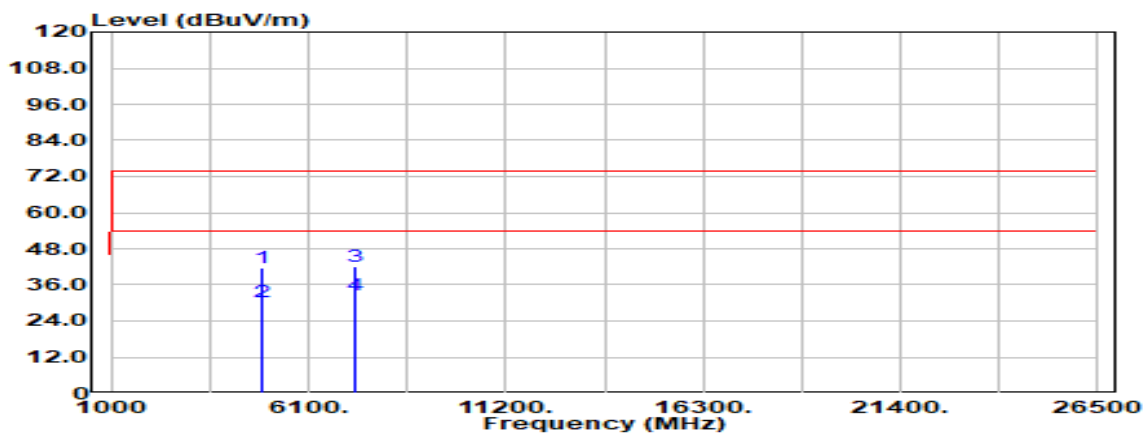


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4874.000       | Peak                           | 31.85                                | 9.60           | 41.45                     | 74.00                     | -32.55         |
| 4874.000       | Average                        | 20.54                                | 9.60           | 30.14                     | 54.00                     | -23.86         |
| 7311.000       | Peak                           | 29.08                                | 13.23          | 42.31                     | 74.00                     | -31.69         |
| 7311.000       | Average                        | 19.23                                | 13.23          | 32.47                     | 54.00                     | -21.53         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Vertical                          | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

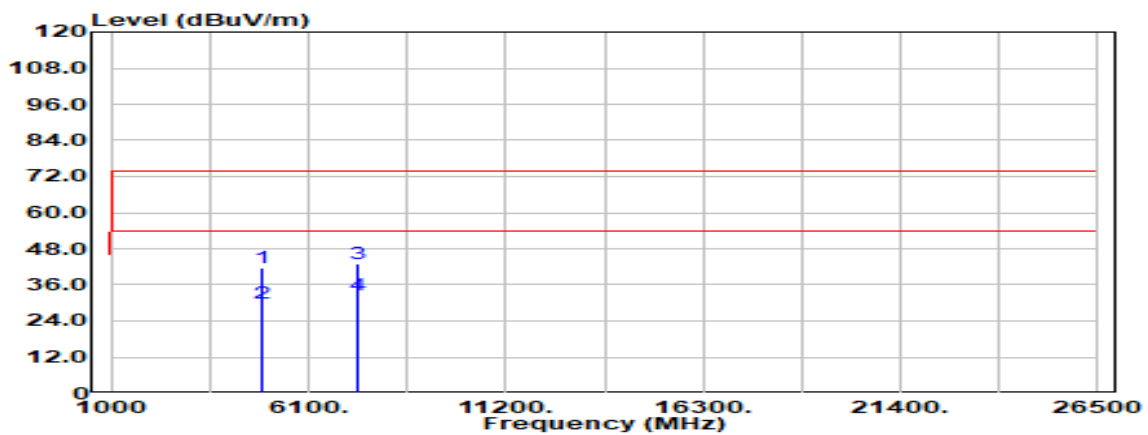


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4904.000       | Peak                           | 32.20                                | 9.59           | 41.79                     | 74.00                     | -32.21         |
| 4904.000       | Average                        | 20.43                                | 9.59           | 30.02                     | 54.00                     | -23.98         |
| 7356.000       | Peak                           | 29.66                                | 13.28          | 42.94                     | 74.00                     | -31.06         |
| 7356.000       | Average                        | 19.40                                | 13.28          | 32.68                     | 54.00                     | -21.32         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                   |               |                 |
|-----------|-----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ac (VHT40)<br>CH 2452 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                          | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                        | Test Engineer | Ray Li          |
| Detector  | Peak and Average                  |               |                 |

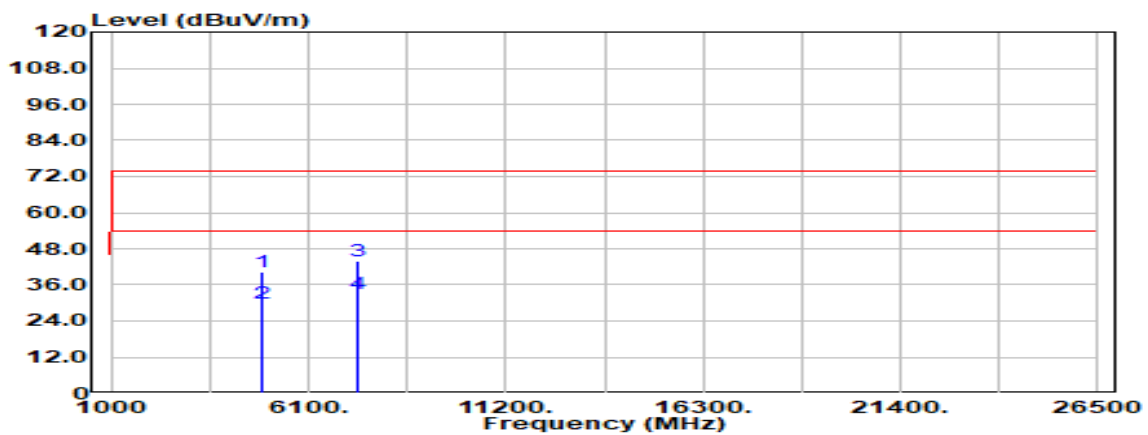


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 30.75                               | 9.59           | 40.33                    | 74.00                    | -33.67         |
| 4904.000       | Average                        | 20.39                               | 9.59           | 29.98                    | 54.00                    | -24.02         |
| 7356.000       | Peak                           | 30.70                               | 13.28          | 43.98                    | 74.00                    | -30.02         |
| 7356.000       | Average                        | 19.58                               | 13.28          | 32.86                    | 54.00                    | -21.14         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

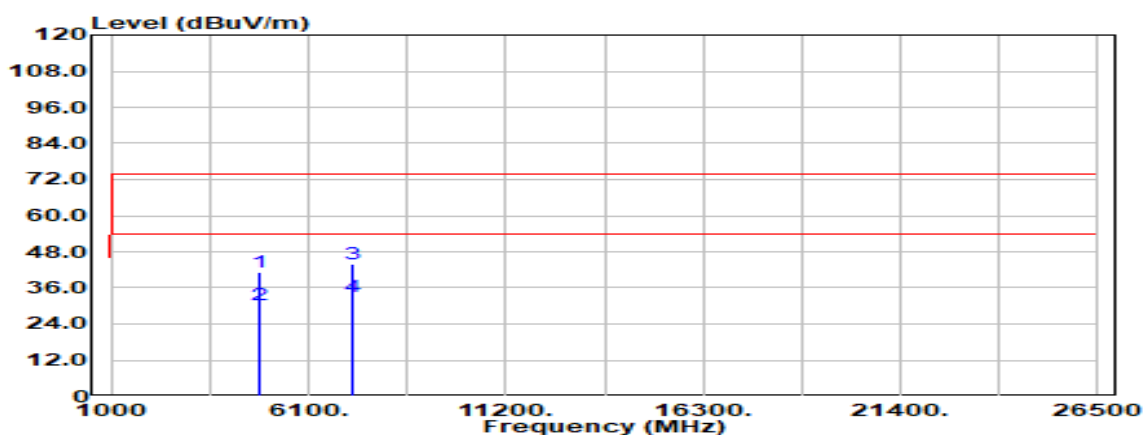


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 31.74                               | 9.53           | 41.27                    | 74.00                    | -32.73         |
| 4824.000       | Average                        | 20.73                               | 9.53           | 30.26                    | 54.00                    | -23.74         |
| 7236.000       | Peak                           | 30.54                               | 13.41          | 43.95                    | 74.00                    | -30.05         |
| 7236.000       | Average                        | 19.72                               | 13.41          | 33.12                    | 54.00                    | -20.88         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2412 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

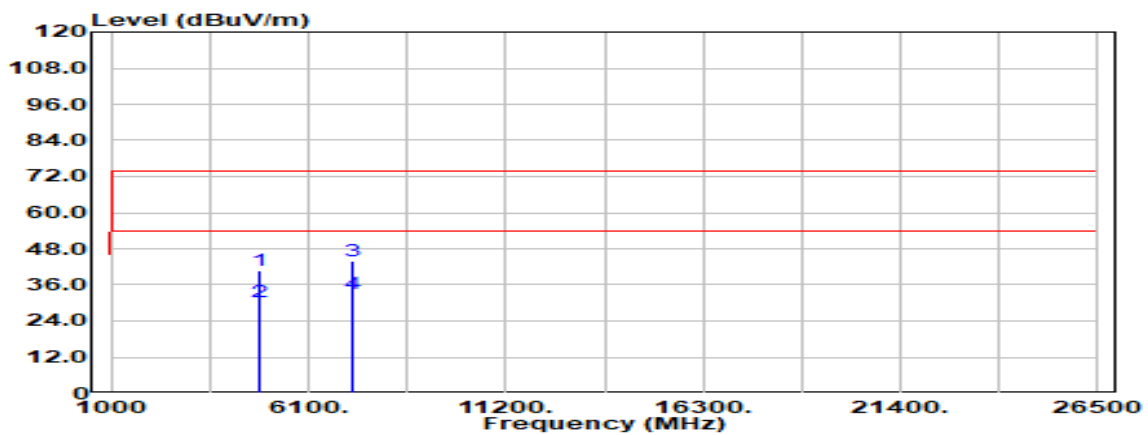


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4824.000       | Peak                           | 31.36                               | 9.53           | 40.89                    | 74.00                    | -33.11         |
| 4824.000       | Average                        | 20.80                               | 9.53           | 30.33                    | 54.00                    | -23.67         |
| 7236.000       | Peak                           | 30.64                               | 13.41          | 44.05                    | 74.00                    | -29.95         |
| 7236.000       | Average                        | 19.65                               | 13.41          | 33.06                    | 54.00                    | -20.94         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

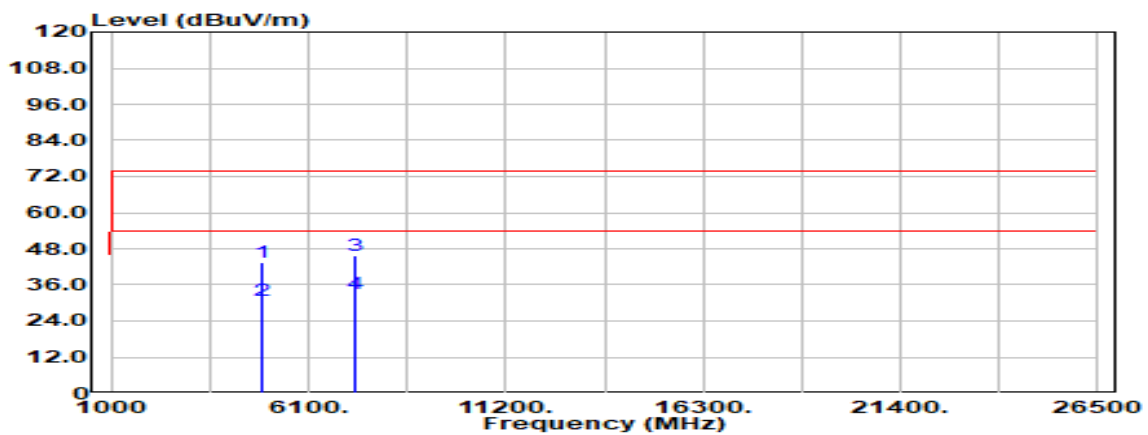


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 33.67                               | 9.60           | 43.27                    | 74.00                    | -30.73         |
| 4874.000       | Average                        | 21.23                               | 9.60           | 30.83                    | 54.00                    | -23.17         |
| 7311.000       | Peak                           | 32.62                               | 13.23          | 45.85                    | 74.00                    | -28.15         |
| 7311.000       | Average                        | 19.97                               | 13.23          | 33.20                    | 54.00                    | -20.80         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

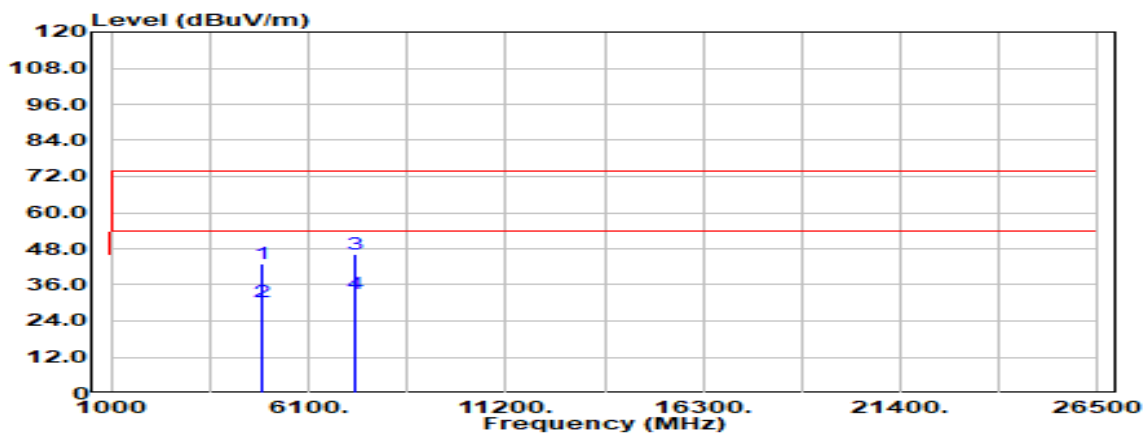


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 33.44                               | 9.60           | 43.03                    | 74.00                    | -30.97         |
| 4874.000       | Average                        | 20.97                               | 9.60           | 30.57                    | 54.00                    | -23.43         |
| 7311.000       | Peak                           | 32.98                               | 13.23          | 46.21                    | 74.00                    | -27.79         |
| 7311.000       | Average                        | 20.04                               | 13.23          | 33.27                    | 54.00                    | -20.73         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

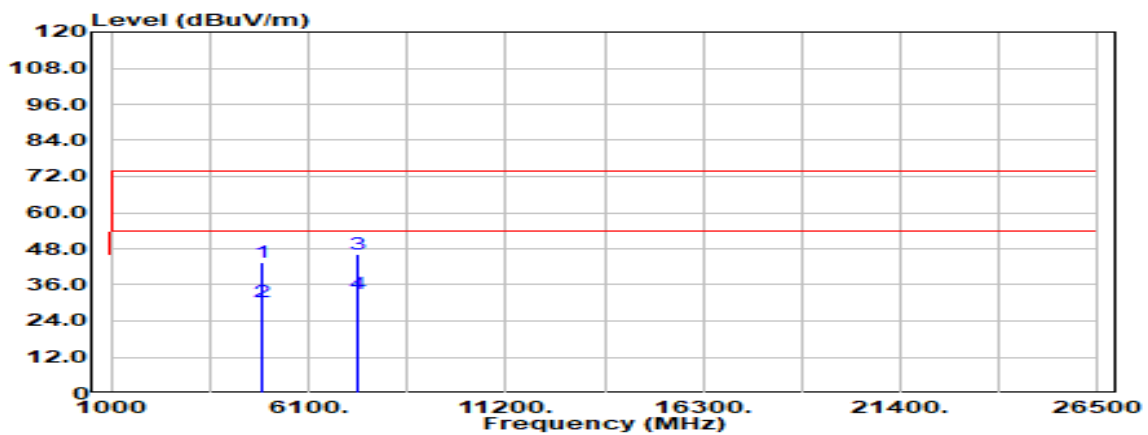


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4924.000       | Peak                           | 33.80                               | 9.63           | 43.43                    | 74.00                    | -30.57         |
| 4924.000       | Average                        | 20.93                               | 9.63           | 30.56                    | 54.00                    | -23.44         |
| 7386.000       | Peak                           | 32.86                               | 13.43          | 46.29                    | 74.00                    | -27.71         |
| 7386.000       | Average                        | 19.72                               | 13.43          | 33.15                    | 54.00                    | -20.85         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE20)<br>CH 2462 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

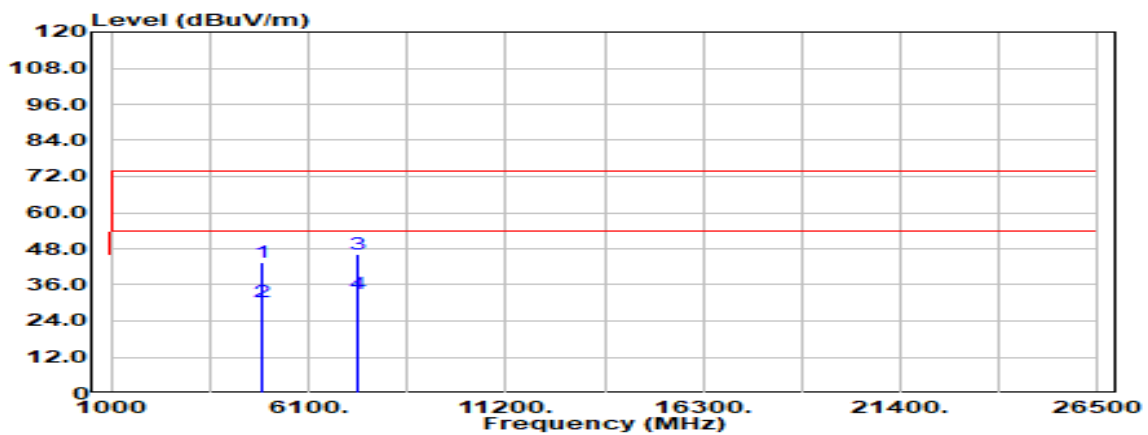


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4924.000       | Peak                           | 34.03                                | 9.63           | 43.66                     | 74.00                     | -30.34         |
| 4924.000       | Average                        | 20.80                                | 9.63           | 30.43                     | 54.00                     | -23.57         |
| 7386.000       | Peak                           | 32.88                                | 13.43          | 46.31                     | 74.00                     | -27.69         |
| 7386.000       | Average                        | 19.73                                | 13.43          | 33.16                     | 54.00                     | -20.84         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

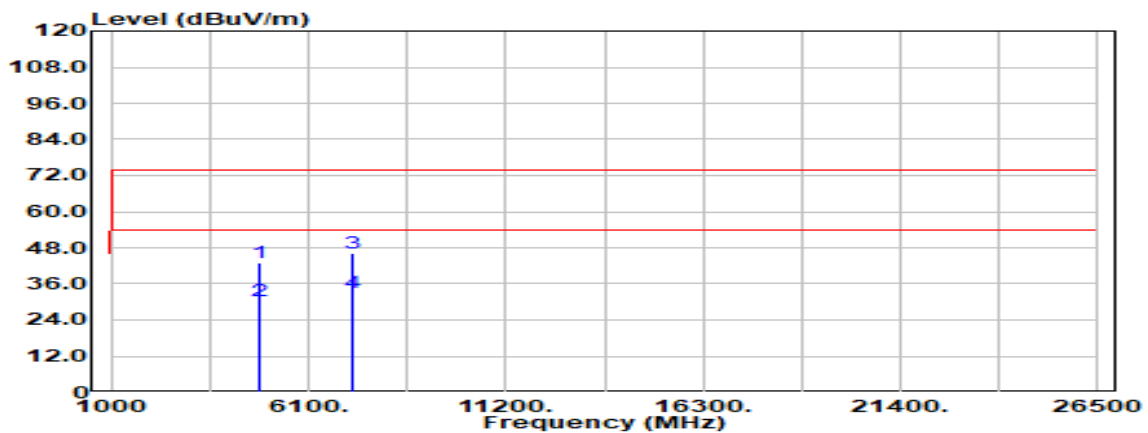


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4844.000       | Peak                           | 33.62                               | 9.59           | 43.21                    | 74.00                    | -30.79         |
| 4844.000       | Average                        | 20.73                               | 9.59           | 30.32                    | 54.00                    | -23.68         |
| 7266.000       | Peak                           | 32.67                               | 13.32          | 45.99                    | 74.00                    | -28.01         |
| 7266.000       | Average                        | 19.73                               | 13.32          | 33.05                    | 54.00                    | -20.95         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2422 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

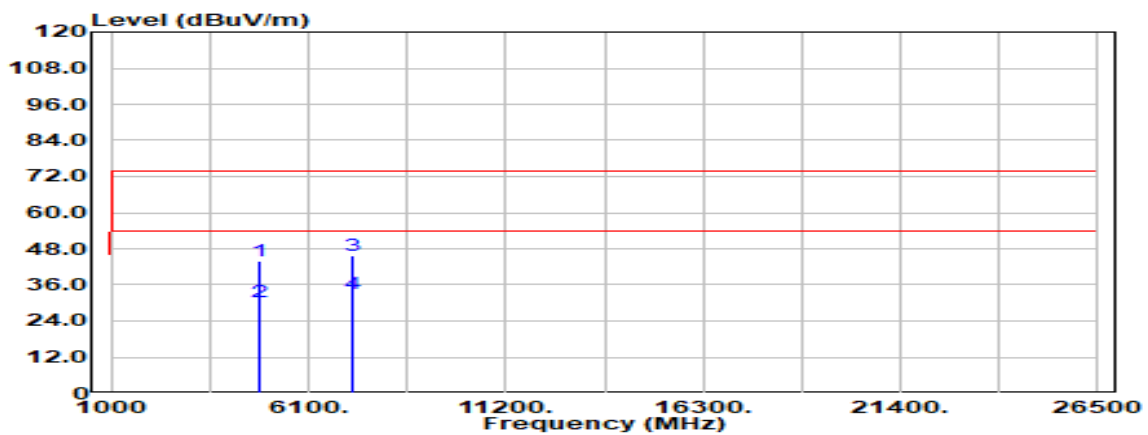


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4844.000       | Peak                           | 34.29                                | 9.59           | 43.88                     | 74.00                     | -30.12         |
| 4844.000       | Average                        | 20.79                                | 9.59           | 30.38                     | 54.00                     | -23.62         |
| 7266.000       | Peak                           | 32.54                                | 13.32          | 45.86                     | 74.00                     | -28.14         |
| 7266.000       | Average                        | 19.71                                | 13.32          | 33.03                     | 54.00                     | -20.97         |
| N/A            |                                |                                      |                |                           |                           |                |
|                |                                |                                      |                |                           |                           |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

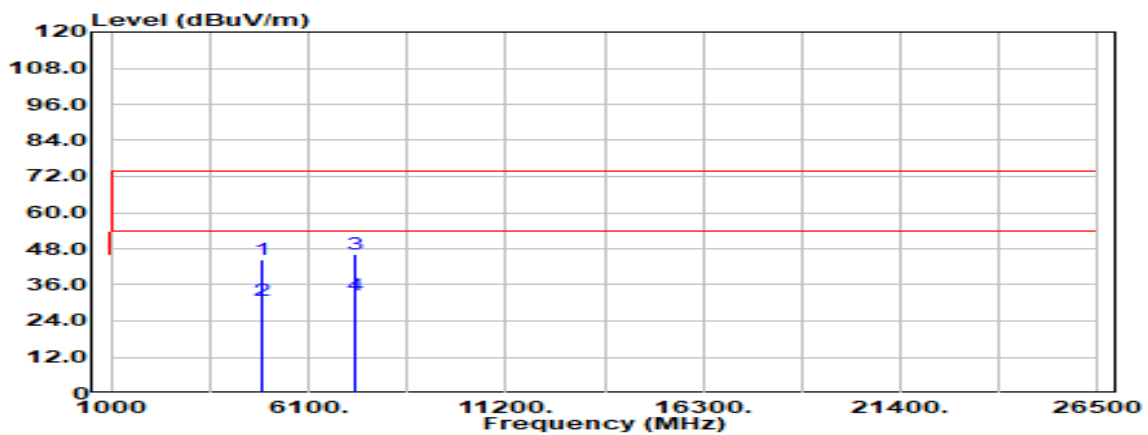


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPV) | Factor<br>(dB) | Actual<br>FS<br>(dBPV/m) | Limit<br>@3m<br>(dBPV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 34.66                               | 9.60           | 44.25                    | 74.00                    | -29.75         |
| 4874.000       | Average                        | 21.07                               | 9.60           | 30.67                    | 54.00                    | -23.33         |
| 7311.000       | Peak                           | 32.85                               | 13.23          | 46.08                    | 74.00                    | -27.92         |
| 7311.000       | Average                        | 19.22                               | 13.23          | 32.45                    | 54.00                    | -21.55         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2201000110KR

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2437 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

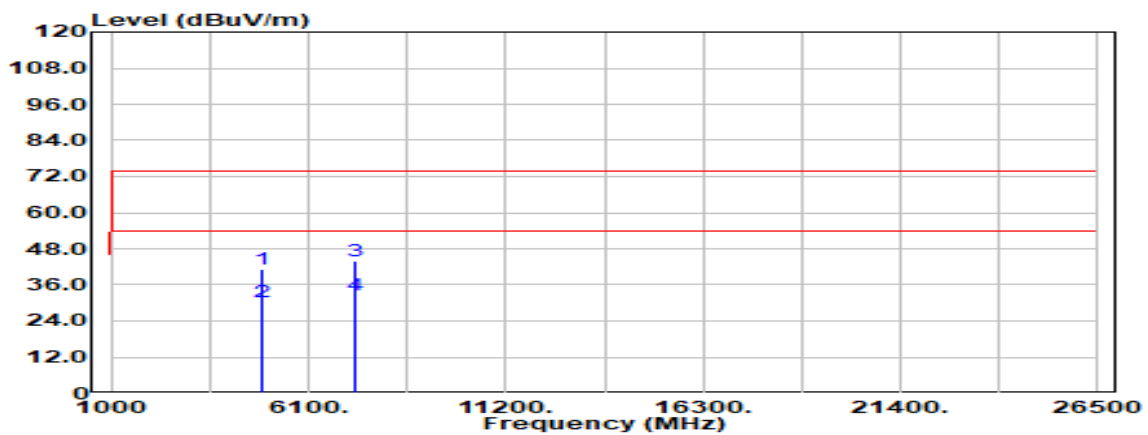


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4874.000       | Peak                           | 31.59                               | 9.60           | 41.18                    | 74.00                    | -32.82         |
| 4874.000       | Average                        | 20.76                               | 9.60           | 30.36                    | 54.00                    | -23.64         |
| 7311.000       | Peak                           | 30.57                               | 13.23          | 43.81                    | 74.00                    | -30.19         |
| 7311.000       | Average                        | 19.31                               | 13.23          | 32.55                    | 54.00                    | -21.45         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

#### Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Vertical                         | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

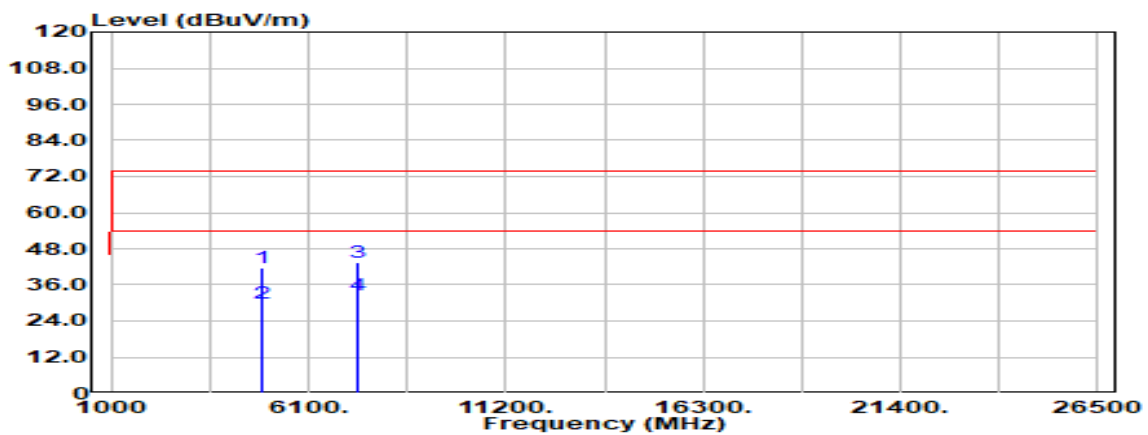

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 32.03                               | 9.59           | 41.62                    | 74.00                    | -32.38         |
| 4904.000       | Average                        | 20.43                               | 9.59           | 30.02                    | 54.00                    | -23.98         |
| 7356.000       | Peak                           | 30.12                               | 13.28          | 43.40                    | 74.00                    | -30.60         |
| 7356.000       | Average                        | 19.41                               | 13.28          | 32.69                    | 54.00                    | -21.31         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.




Report No.: TMWK2201000110KR

Page: 290 / 290

Rev.: 00

|           |                                  |               |                 |
|-----------|----------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11 ax (HE40)<br>CH 2452 | Temp/Hum      | 23.6(°C)/ 59%RH |
| Test Item | Harmonic                         | Test Date     | April 12, 2022  |
| Polarize  | Horizontal                       | Test Engineer | Ray Li          |
| Detector  | Peak and Average                 |               |                 |

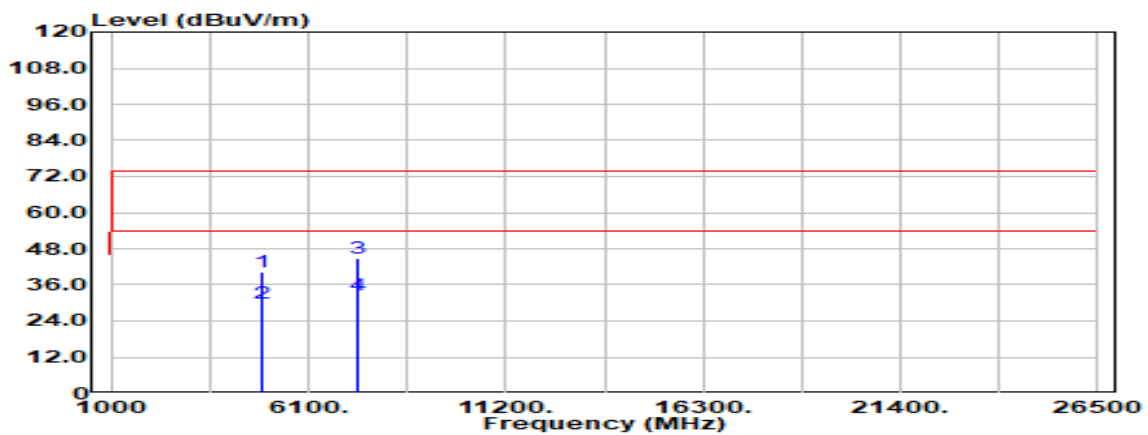

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4904.000       | Peak                           | 30.88                               | 9.59           | 40.47                    | 74.00                    | -33.53         |
| 4904.000       | Average                        | 20.43                               | 9.59           | 30.01                    | 54.00                    | -23.99         |
| 7356.000       | Peak                           | 31.68                               | 13.28          | 44.96                    | 74.00                    | -29.04         |
| 7356.000       | Average                        | 19.52                               | 13.28          | 32.80                    | 54.00                    | -21.20         |
| N/A            |                                |                                     |                |                          |                          |                |
|                |                                |                                     |                |                          |                          |                |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**- End of Test Report -**