



# FCC RF Test Report

## (LTE)

**Report No.:** JYTSZ-R12-2301644

**Applicant:** TECNO MOBILE LIMITED

**Address of Applicant:** FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE  
19-25 SHAN MEI STREET FOTAN NT HONGKONG

**Equipment Under Test (EUT)**

Product Name: Mobile Phone

Model No.: CL6

Trade Mark: TECNO

**FCC ID:** 2ADYY-CL6

**Applicable Standards:** FCC CFR Title 47 Part 2, 22H, 24E, 27L & H & M & D

**Date of Sample Receipt:** 23 Nov., 2023

**Date of Test:** 24 Nov., to 02 Jan., 2024

**Date of Report Issued:** 03 Jan., 2024

**Test Result:** PASS

**Tested by:**

*Luca King*

**Date:**

*03 Jan., 2024*

**Reviewed by:**

*Luca King*

**Date:**

*03 Jan., 2024*

**Approved by:**

*Janet Wei*  
**Manager**

**Date:**

*03 Jan., 2024*

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 1 Version

| Version No. | Date          | Description                 |
|-------------|---------------|-----------------------------|
| 00          | 25 Dec., 2023 | Original                    |
| 01          | 03 Jan., 2024 | 1. Updated Appendix B – LTE |
|             |               |                             |
|             |               |                             |
|             |               |                             |

## 2 Contents

Page

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Cover Page .....</b>                                           | <b>1</b>  |
| <b>1 Version .....</b>                                            | <b>2</b>  |
| <b>2 Contents.....</b>                                            | <b>3</b>  |
| <b>3 General Information.....</b>                                 | <b>4</b>  |
| 3.1 Client Information .....                                      | 4         |
| 3.2 General Description of E.U.T. ....                            | 4         |
| 3.3 Test Mode and Environment .....                               | 5         |
| 3.4 Description of Test Auxiliary Equipment .....                 | 5         |
| 3.5 Measurement Uncertainty .....                                 | 5         |
| 3.6 Additions to, Deviations, or Exclusions from the Method ..... | 5         |
| 3.7 Laboratory Facility .....                                     | 5         |
| 3.8 Laboratory Location.....                                      | 6         |
| 3.9 Test Instruments List .....                                   | 6         |
| <b>4 Measurement Setup and Procedure .....</b>                    | <b>8</b>  |
| 4.1 Test Channel .....                                            | 8         |
| 4.2 Test Setup .....                                              | 11        |
| 4.3 Test Procedure .....                                          | 12        |
| <b>5 Test Results.....</b>                                        | <b>13</b> |
| 5.1 Summary .....                                                 | 13        |
| 5.1.1 Clause and Data Summary.....                                | 13        |
| 5.1.2 Test Limit.....                                             | 14        |
| 5.2 Field Strength of Spurious Radiation Measurement .....        | 16        |

### 3 General Information

#### 3.1 Client Information

|               |                                                                                                                        |
|---------------|------------------------------------------------------------------------------------------------------------------------|
| Applicant:    | TECNO MOBILE LIMITED                                                                                                   |
| Address:      | FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG                                |
| Manufacturer: | TECNO MOBILE LIMITED                                                                                                   |
| Address:      | FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG                                |
| Factory:      | SHENZHEN TECNO TECHNOLOGY CO., LTD.                                                                                    |
| Address:      | 101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China |

#### 3.2 General Description of E.U.T.

|                            |                                                                                                                                              |                                  |                         |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------|
| Product Name:              | Mobile Phone                                                                                                                                 |                                  |                         |
| Model No.:                 | CL6                                                                                                                                          |                                  |                         |
| Operation Frequency Range: | LTE band 2:                                                                                                                                  | Tx: 1850 MHz - 1910 MHz          | Rx: 1930 MHz - 1990 MHz |
|                            | LTE band 4:                                                                                                                                  | Tx: 1710 MHz - 1755 MHz          | Rx: 2110 MHz - 2155 MHz |
|                            | LTE band 5:                                                                                                                                  | Tx: 824 MHz - 849 MHz            | Rx: 869 MHz - 894 MHz   |
|                            | LTE band 7:                                                                                                                                  | Tx: 2500 MHz - 2570 MHz          | Rx: 2620 MHz - 2690 MHz |
|                            | LTE band 12:                                                                                                                                 | Tx: 699 MHz - 716 MHz            | Rx: 729 MHz - 746 MHz   |
|                            | LTE band 17:                                                                                                                                 | Tx: 704 MHz - 716 MHz            | Rx: 734 MHz - 746 MHz   |
|                            | LTE band 38:                                                                                                                                 | Tx: 2570 MHz - 2620 MHz          | Rx: 2570 MHz - 2620 MHz |
|                            | LTE band 40:                                                                                                                                 | Tx: 2305 MHz - 2315 MHz          | Rx: 2305 MHz - 2315 MHz |
|                            | LTE band 40:                                                                                                                                 | Tx: 2350 MHz - 2360 MHz          | Rx: 2350 MHz - 2360 MHz |
|                            | LTE band 41:                                                                                                                                 | Tx: 2535 MHz - 2655 MHz          | Rx: 2535 MHz - 2655 MHz |
|                            | LTE band 66:                                                                                                                                 | Tx: 1710 MHz - 1780 MHz          | Rx: 2110 MHz - 2200 MHz |
| Modulation Type:           | <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM                 |                                  |                         |
| Antenna Type:              | Internal Antenna                                                                                                                             |                                  |                         |
| Antenna Gain:              | LTE band 2:                                                                                                                                  | -3.77 dBi (declare by Applicant) |                         |
|                            | LTE band 4:                                                                                                                                  | -3.09 dBi (declare by Applicant) |                         |
|                            | LTE band 5:                                                                                                                                  | -4.50 dBi (declare by Applicant) |                         |
|                            | LTE band 7:                                                                                                                                  | -7.79 dBi (declare by Applicant) |                         |
|                            | LTE band 12:                                                                                                                                 | -5.78 dBi (declare by Applicant) |                         |
|                            | LTE band 17:                                                                                                                                 | -5.78 dBi (declare by Applicant) |                         |
|                            | LTE band 38:                                                                                                                                 | -7.79 dBi (declare by Applicant) |                         |
|                            | LTE band 40:                                                                                                                                 | -5.84 dBi (declare by Applicant) |                         |
|                            | LTE band 41:                                                                                                                                 | -7.79 dBi (declare by Applicant) |                         |
|                            | LTE band 66:                                                                                                                                 | -3.09 dBi (declare by Applicant) |                         |
| Power Supply:              | Rechargeable Li-ion Polymer Battery DC3.91V, 4900mAh                                                                                         |                                  |                         |
| AC Adapter:                | Model: U700TSA<br>Input: AC100-240V, 50/60Hz, 2.0A<br>Output: DC 5.0V, 3.0A 15.0W or 5.0V-10V, 7.0A or 11.0V, 6.4A or 4.0V-20.0V, 3.5A 70.0W |                                  |                         |
| Test Sample Condition:     | The test samples were provided in good working order with no visible defects.                                                                |                                  |                         |

### 3.3 Test Mode and Environment

| Test Mode:                                                                                                                                                                                                                                                                                                                                                                              |                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| QPSK mode:                                                                                                                                                                                                                                                                                                                                                                              | Keep the EUT communication with simulated station in QPSK mode          |
| 16QAM mode:                                                                                                                                                                                                                                                                                                                                                                             | Keep the EUT communication with simulated station in 16QAM mode         |
| 64QAM mode:                                                                                                                                                                                                                                                                                                                                                                             | Keep the EUT communication with simulated station in 64QAM mode         |
| <b>Remark:</b> The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report. |                                                                         |
| Operating Environment:                                                                                                                                                                                                                                                                                                                                                                  |                                                                         |
| Temperature:                                                                                                                                                                                                                                                                                                                                                                            | Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C                             |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                               | 20 % ~ 75 % RH                                                          |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                   | 1008 mbar                                                               |
| Voltage:                                                                                                                                                                                                                                                                                                                                                                                | Nominal: 3.91 Vdc, Extreme: Low 3.45 Vdc, High 4.50 Vdc                 |
| Test Engineer:                                                                                                                                                                                                                                                                                                                                                                          | Toby Huang (Conducted measurement)<br>Kiran Zeng (Radiated measurement) |

### 3.4 Description of Test Auxiliary Equipment

| Test Equipment    | Manufacturer | Model No. | Serial No. |
|-------------------|--------------|-----------|------------|
| Simulated Station | Anritsu      | MT8820C   | 6201026545 |

### 3.5 Measurement Uncertainty

| Parameter                                                                                                                                                                                                                                                                                                            | Expanded Uncertainty<br>(Confidence of 95%(U = 2Uc(y))) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Radiated Emission (30MHz ~ 200MHz) (3m SAC)                                                                                                                                                                                                                                                                          | 4.6 dB                                                  |
| Radiated Emission (200MHz ~ 1000MHz) (3m SAC)                                                                                                                                                                                                                                                                        | 5.8 dB                                                  |
| Radiated Emission (1GHz ~ 6GHz) (3m FAR)                                                                                                                                                                                                                                                                             | 4.95 dB                                                 |
| Radiated Emission (6GHz ~ 18GHz) (3m FAR)                                                                                                                                                                                                                                                                            | 5.23 dB                                                 |
| Radiated Emission (18GHz ~ 40GHz) (3m FAR)                                                                                                                                                                                                                                                                           | 5.32 dB                                                 |
| <b>Note:</b> All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance. |                                                         |

### 3.6 Additions to, Deviations, or Exclusions from the Method

|    |
|----|
| No |
|----|

### 3.7 Laboratory Facility

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC - Designation No.: CN1211</b><br/>JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.</li> <li>● <b>ISED – CAB identifier.: CN0021</b><br/>The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.</li> <li>● <b>CNAS - Registration No.: CNAS L15527</b><br/>JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.</li> <li>● <b>A2LA - Registration No.: 4346.01</b><br/>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <a href="https://portal.a2la.org/scopepdf/4346-01.pdf">https://portal.a2la.org/scopepdf/4346-01.pdf</a></li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

### 3.9 Test Instruments List

| Radiated Emission(3m SAC):   |                 |                |                  |                      |                          |
|------------------------------|-----------------|----------------|------------------|----------------------|--------------------------|
| Test Equipment               | Manufacturer    | Model No.      | Manage No.       | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC                       | ETS             | 9m*6m*6m       | WXJ001-1         | 04-14-2021           | 04-13-2024               |
| Loop Antenna                 | Schwarzbeck     | FMZB 1519 B    | WXJ002-4         | 02-09-2023           | 02-08-2024               |
| BiConiLog Antenna            | Schwarzbeck     | VULB9163       | WXJ002           | 02-09-2023           | 02-08-2024               |
| Biconical Antenna            | Schwarzbeck     | VUBA9117       | WXJ002-1         | 07-02-2021           | 07-01-2024               |
| Pre-amplifier (30MHz ~ 1GHz) | Schwarzbeck     | BBV9743B       | WXJ001-2         | 01-10-2023           | 01-09-2024               |
| EMI Test Receiver            | Rohde & Schwarz | ESRP7          | WXJ003-1         | 01-11-2023           | 01-10-2024               |
| Coaxial Cable (30MHz ~ 1GHz) | JYTSZ           | JYT3M-1G-NN-8M | WXG001-4         | 01-18-2023           | 01-17-2024               |
| Band Reject Filter Group     | Tonscend        | JS0806-F       | WXJ089           | N/A                  |                          |
| Test Software                | Tonscend        | TS+            | Version: 3.0.0.1 |                      |                          |

| Radiated Emission(3m FAR):    |                 |                 |                |                      |                          |
|-------------------------------|-----------------|-----------------|----------------|----------------------|--------------------------|
| Test Equipment                | Manufacturer    | Model No.       | Manage No.     | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m FAR                        | YUNYI           | 9m*6m*6m        | WXJ097         | 06-15-2023           | 06-14-2028               |
| BiConiLog Antenna             | Schwarzbeck     | VULB9163        | WXJ097-2       | 07-13-2023           | 07-12-2024               |
| Biconical Antenna             | Schwarzbeck     | VUBA9117        | WXJ002-1       | 07-02-2021           | 07-01-2024               |
| Horn Antenna                  | Schwarzbeck     | BBHA9120D       | WXJ097-3       | 07-14-2023           | 07-13-2024               |
| Horn Antenna                  | Schwarzbeck     | BBHA9120D       | WXJ002-3       | 01-09-2023           | 01-08-2024               |
| Horn Antenna                  | Schwarzbeck     | BBHA9170        | WXJ002-5       | 01-09-2023           | 01-08-2024               |
| Horn Antenna                  | Schwarzbeck     | BBHA9170        | WXJ002-6       | 01-09-2023           | 01-08-2024               |
| Pre-amplifier (30MHz ~ 1GHz)  | YUNYI           | PAM-310N        | WXJ097-5       | 05-14-2023           | 05-13-2024               |
| Pre-amplifier (1GHz ~ 18GHz)  | YUNYI           | PAM-118N        | WXJ097-6       | 05-14-2023           | 05-13-2024               |
| Pre-amplifier (18GHz ~ 40GHz) | RF System       | TRLA-180400G45B | WXJ002-7       | 01-11-2023           | 01-10-2024               |
| EMI Test Receiver             | Rohde & Schwarz | ESCI3           | WXJ003         | 01-10-2023           | 01-09-2024               |
| Spectrum Analyzer             | Rohde & Schwarz | FSP 30          | WXJ004         | 01-10-2023           | 01-09-2024               |
| Spectrum Analyzer             | KEYSIGHT        | N9010B          | WXJ081-1       | 06-13-2023           | 06-12-2024               |
| Coaxial Cable (30MHz ~ 1GHz)  | JYTSZ           | JYT3M-1G-NN-13M | WXG097-1       | 08-01-2023           | 07-31-2024               |
| Coaxial Cable (1GHz ~ 18GHz)  | JYTSZ           | JYT3M-18G-NN-8M | WXG097-2       | 08-01-2023           | 07-31-2024               |
| Coaxial Cable (18GHz ~ 40GHz) | JYTSZ           | JYT3M-40G-SS-8M | WXG097-3       | 08-01-2023           | 07-31-2024               |
| High Band Reject Filter Group | Tonscend        | JS0806-F        | WXJ089         | N/A                  |                          |
| Low Band Reject Filter Group  | Tonscend        | JS0806-F        | WXJ097-4       | N/A                  |                          |
| Test Software                 | Tonscend        | TS+             | Version: 5.0.0 |                      |                          |

| Conducted Method:            |                 |           |                     |                      |                          |
|------------------------------|-----------------|-----------|---------------------|----------------------|--------------------------|
| Test Equipment               | Manufacturer    | Model No. | Manage No.          | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| Spectrum Analyzer            | Keysight        | N9020A    | WXJ094              | 09-25-2023           | 09-24-2024               |
| Simulated Station            | Rohde & Schwarz | CMW500    | WXJ081              | 06-13-2023           | 06-12-2024               |
| Temperature Humidity Chamber | ZHONG ZHI       | CZ-A-80D  | WXJ032-3            | 01-09-2023           | 01-08-2025               |
| DC Power Supply              | Keysight        | E3642A    | WXJ025-2            | N/A                  |                          |
| RF Control Unit              | Tonscend        | JS0806-1  | WXG010              | N/A                  |                          |
| Band Reject Filter Group     | Tonscend        | JS0806-F  | WXG010-1            | N/A                  |                          |
| Test Software                | Tonscend        | TS+       | Version: 2.6.9.0526 |                      |                          |

## 4 Measurement Setup and Procedure

### 4.1 Test Channel

According to ANSI C63.26-2015 chapter 5.1.2.1 Table 2 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

| LTE band 2      |       |                 |                 |       |                 |
|-----------------|-------|-----------------|-----------------|-------|-----------------|
| Channels        |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 1.4 MHz         |       |                 | 3 MHz           |       |                 |
| Lowest channel  | 18607 | 1850.7          | Lowest channel  | 18915 | 1851.5          |
| Middle channel  | 18900 | 1880.0          | Middle channel  | 18900 | 1880.0          |
| Highest channel | 19193 | 1909.3          | Highest channel | 19185 | 1908.5          |
| 5 MHz           |       |                 | 10 MHz          |       |                 |
| Lowest channel  | 18625 | 1852.5          | Lowest channel  | 18650 | 1855.0          |
| Middle channel  | 18900 | 1880.0          | Middle channel  | 18900 | 1880.0          |
| Highest channel | 19175 | 1907.5          | Highest channel | 19150 | 1905.0          |
| 15 MHz          |       |                 | 20 MHz          |       |                 |
| Lowest channel  | 18675 | 1857.5          | Lowest channel  | 18700 | 1860.0          |
| Middle channel  | 18900 | 1880.0          | Middle channel  | 18900 | 1880.0          |
| Highest channel | 19125 | 1902.5          | Highest channel | 19100 | 1900.0          |
| LTE band 5      |       |                 |                 |       |                 |
| Channels        |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 1.4 MHz         |       |                 | 3 MHz           |       |                 |
| Lowest channel  | 20407 | 824.7           | Lowest channel  | 20415 | 825.5           |
| Middle channel  | 20525 | 836.5           | Middle channel  | 20525 | 836.5           |
| Highest channel | 20643 | 848.3           | Highest channel | 20635 | 847.5           |
| 5 MHz           |       |                 | 10 MHz          |       |                 |
| Lowest channel  | 20425 | 826.5           | Lowest channel  | 20450 | 829.0           |
| Middle channel  | 20525 | 836.5           | Middle channel  | 20525 | 836.5           |
| Highest channel | 20625 | 846.5           | Highest channel | 20600 | 844.0           |
| LTE band 7      |       |                 |                 |       |                 |
| Channels        |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 5 MHz           |       |                 | 10 MHz          |       |                 |
| Lowest channel  | 20775 | 2502.5          | Lowest channel  | 20800 | 2505.0          |
| Middle channel  | 21100 | 2535.0          | Middle channel  | 21100 | 2535.0          |
| Highest channel | 21425 | 2567.5          | Highest channel | 21400 | 2565.0          |
| 15 MHz          |       |                 | 20 MHz          |       |                 |
| Lowest channel  | 20825 | 2507.5          | Lowest channel  | 20850 | 2510.0          |
| Middle channel  | 21100 | 2535.0          | Middle channel  | 21100 | 2535.0          |
| Highest channel | 21375 | 2562.5          | Highest channel | 21350 | 2560.0          |




| LTE band 12            |       |                 |                 |       |                 |
|------------------------|-------|-----------------|-----------------|-------|-----------------|
| Channels               |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 1.4 MHz                |       |                 | 3 MHz           |       |                 |
| Lowest channel         | 23017 | 699.70          | Lowest channel  | 23025 | 700.50          |
| Middle channel         | 23095 | 707.50          | Middle channel  | 23095 | 707.50          |
| Highest channel        | 23173 | 715.30          | Highest channel | 23165 | 714.50          |
| 5 MHz                  |       |                 | 10 MHz          |       |                 |
| Lowest channel         | 23035 | 701.50          | Lowest channel  | 23060 | 704.00          |
| Middle channel         | 23095 | 707.50          | Middle channel  | 23095 | 707.50          |
| Highest channel        | 23155 | 713.50          | Highest channel | 23130 | 711.00          |
| LTE band 17            |       |                 |                 |       |                 |
| 5 MHz                  |       |                 | 10 MHz          |       |                 |
| Lowest channel         | 23755 | 706.50          | Lowest channel  | 23780 | 709.00          |
| Middle channel         | 23790 | 710.00          | Middle channel  | 23790 | 710.00          |
| Highest channel        | 23825 | 713.50          | Highest channel | 23800 | 711.00          |
| LTE band 40(2305-2315) |       |                 |                 |       |                 |
| Channels               |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 5 MHz                  |       |                 | 10 MHz          |       |                 |
| Lowest channel         | 38725 | 2307.5          | Lowest channel  | /     | /               |
| Middle channel         | 38750 | 2310.0          | Middle channel  | 38750 | 2310.0          |
| Highest channel        | 38775 | 2312.5          | Highest channel | /     | /               |
| LTE band 40(2350-2360) |       |                 |                 |       |                 |
| Channels               |       | Frequency (MHz) | Channels        |       | Frequency (MHz) |
| 5 MHz                  |       |                 | 10 MHz          |       |                 |
| Lowest channel         | 39225 | 2352.5          | Lowest channel  | /     | /               |
| Middle channel         | 39175 | 2355.0          | Middle channel  | 39200 | 2355.0          |
| Highest channel        | 39200 | 2357.5          | Highest channel | /     | /               |

| LTE band 41 Include LTE band 38 |        |                 |                 |        |                 |
|---------------------------------|--------|-----------------|-----------------|--------|-----------------|
| Channels                        |        | Frequency (MHz) | Channels        |        | Frequency (MHz) |
| 5 MHz                           |        |                 | 10 MHz          |        |                 |
| Lowest channel                  | 40065  | 2537.50         | Lowest channel  | 40090  | 2540.00         |
| Middle channel                  | 40640  | 2595.00         | Middle channel  | 40640  | 2595.00         |
| Highest channel                 | 41215  | 2652.50         | Highest channel | 41190  | 2650.00         |
| 15 MHz                          |        |                 | 20 MHz          |        |                 |
| Lowest channel                  | 40115  | 2542.50         | Lowest channel  | 40140  | 2545.00         |
| Middle channel                  | 40640  | 2595.00         | Middle channel  | 40640  | 2595.00         |
| Highest channel                 | 41165  | 2647.50         | Highest channel | 41140  | 2645.00         |
| LTE band 66 Include LTE band 4  |        |                 |                 |        |                 |
| Channels                        |        | Frequency (MHz) | Channels        |        | Frequency (MHz) |
| 1.4 MHz                         |        |                 | 3 MHz           |        |                 |
| Lowest channel                  | 131979 | 1710.7          | Lowest channel  | 131987 | 1711.5          |
| Middle channel                  | 132322 | 1745.0          | Middle channel  | 132322 | 1745.0          |
| Highest channel                 | 132665 | 1779.3          | Highest channel | 132657 | 1778.5          |
| 5 MHz                           |        |                 | 10 MHz          |        |                 |
| Lowest channel                  | 131997 | 1712.5          | Lowest channel  | 132022 | 1715.0          |
| Middle channel                  | 132322 | 1745.5          | Middle channel  | 132322 | 1745.0          |
| Highest channel                 | 132647 | 1777.5          | Highest channel | 132622 | 1775.0          |
| 15 MHz                          |        |                 | 20 MHz          |        |                 |
| Lowest channel                  | 132047 | 1717.5          | Lowest channel  | 132072 | 1720.0          |
| Middle channel                  | 132322 | 1745.0          | Middle channel  | 132322 | 1745.0          |
| Highest channel                 | 132597 | 1772.5          | Highest channel | 132572 | 1770.0          |


## 4.2 Test Setup

### 1) Radiated emission measurement:


Below 1GHz (3m SAC)

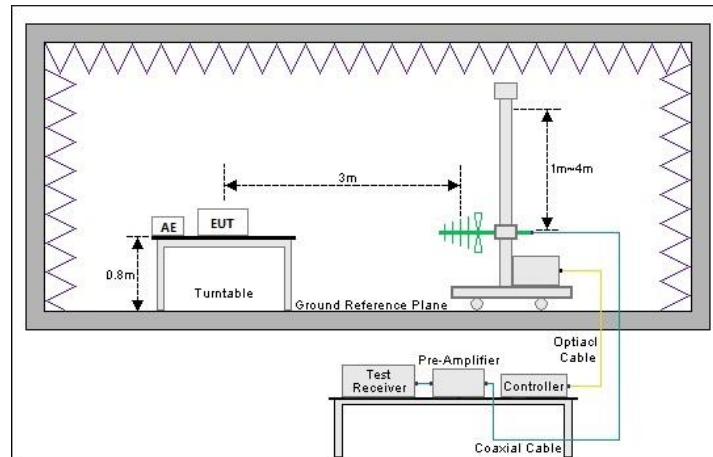

Above 1GHz (3m FAR)

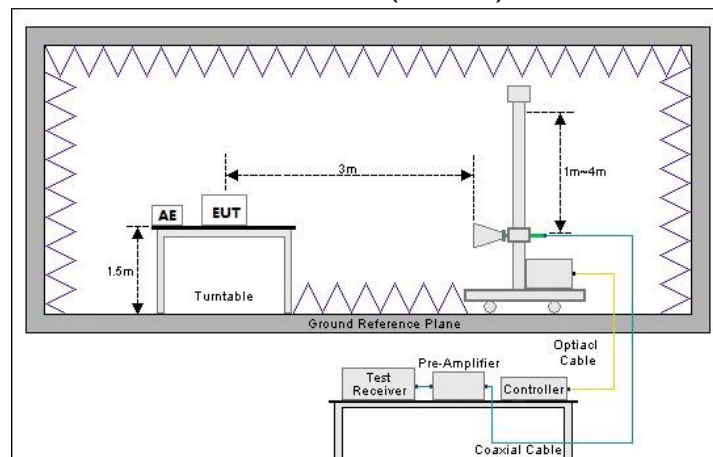

### 2) Conducted test method

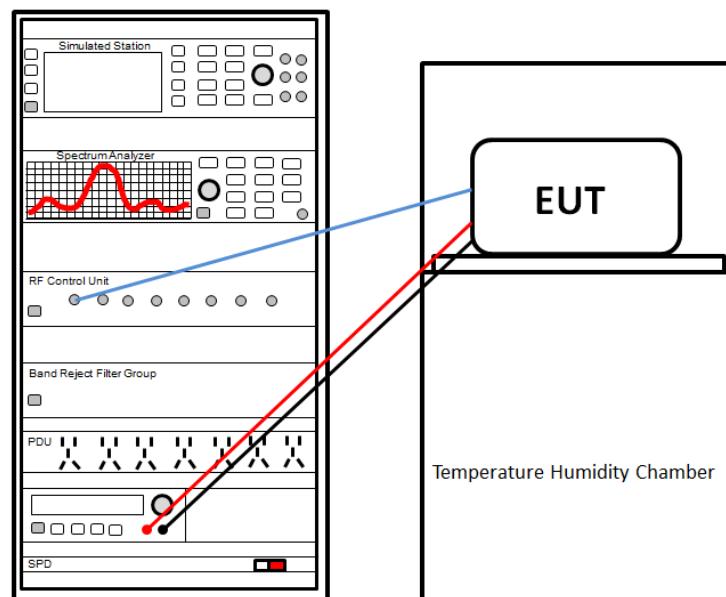

### 4.3 Test Procedure

| Test method           | Test step                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated emission     | <p><b>For below 1GHz:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> <p><b>For above 1GHz:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> |
| Conducted test method | <ol style="list-style-type: none"> <li>The LTE antenna port of EUT was connected to the test port of the test system through an RF cable.</li> <li>The EUT is keeping in continuous transmission mode and tested in all modulation modes.</li> <li>Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.</li> </ol>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

## 5 Test Results

### 5.1 Summary

#### 5.1.1 Clause and Data Summary

| Test items                                                                                                                                                                                                                                                                                                    | Standard clause                                                                                                                           | Test data                            | Result |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------|
| RF Exposure (SAR)                                                                                                                                                                                                                                                                                             | Part 1.1307<br>Part 2.1093                                                                                                                | See SAR Report                       | Pass   |
| RF Output Power                                                                                                                                                                                                                                                                                               | Part 2.1046<br>Part 22.913 (a)(5)<br>Part 24.232 (c)<br>Part 27.50 (a)(3)<br>Part 27.50 (c)(10)<br>Part 27.50 (d)(4)<br>Part 27.50 (h)(2) | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| Peak-to-Average Power Ratio                                                                                                                                                                                                                                                                                   | Part 24.232 (d)<br>Part 27.50 (d)(5)                                                                                                      | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| Modulation Characteristics                                                                                                                                                                                                                                                                                    | Part 2.1047                                                                                                                               | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| 26dB Emission Bandwidth<br>99% Occupied Bandwidth                                                                                                                                                                                                                                                             | Part 2.1049                                                                                                                               | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| Out of Band Emission at Antenna<br>Terminals                                                                                                                                                                                                                                                                  | Part 2.1051<br>Part 22.917 (a)<br>Part 24.238 (a)<br>Part 27.53 (g)<br>Part 27.53 (h)<br>Part 27.53 (m)(4)                                | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| Field Strength of Spurious Radiation                                                                                                                                                                                                                                                                          | Part 2.1053<br>Part 22.917 (a)<br>Part 24.238 (a)<br>Part 27.53 (a)<br>Part 27.53 (g)<br>Part 27.53 (h)<br>Part 27.53 (m)(4)              | See Section 5.2                      | Pass   |
| Frequency Stability vs. Temperature                                                                                                                                                                                                                                                                           | Part 2.1055 (a)(1)(b)<br>Part 22.355<br>Part 24.235<br>Part 27.54                                                                         | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| Frequency Stability vs. Voltage                                                                                                                                                                                                                                                                               | Part 2.1055 (d)(2)<br>Part 22.355<br>Part 24.235<br>Part 27.54                                                                            | Appendix A – LTE<br>Appendix B – LTE | Pass   |
| <b>Remark:</b><br>1. Pass: The EUT complies with the essential requirements in the standard.<br>2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (Fundamental Frequency below 1GHz)/1.0dB (Fundamental Frequency above 1GHz) (provided by the customer). |                                                                                                                                           |                                      |        |
| <b>Test Method:</b>                                                                                                                                                                                                                                                                                           | ANSI/TIA-603-E-2016<br>ANSI C63.26-2015                                                                                                   |                                      |        |

## 5.1.2 Test Limit

| Test items                                                                            | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RF Output Power                                                                       | <b>LTE band 2/7/38/41:</b> 2W EIRP<br><b>LTE band 4/66:</b> 1W EIRP<br><b>LTE band 5:</b> 7W ERP<br><b>LTE band 12/17:</b> 3W ERP<br><b>LTE band 40:</b> 0.25W EIRP/5MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Peak-to-Average Power Ratio                                                           | <b>LTE band 2/4:</b> The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB<br><b>Other bands:</b> N/A report only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Modulation Characteristics                                                            | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 26dB Emission Bandwidth<br>99% Occupied Bandwidth                                     | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Out of Band Emission at Antenna Terminals<br><br>Field Strength of Spurious Radiation | <b>LTE band 2, 4, 5, 12, 17, 66:</b><br>The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.<br><br><b>LTE band 7, 38, 41:</b><br>For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz.<br><b>LTE band 40:</b><br>For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:<br>(i) By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz;<br>(ii) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz;<br>(iii) By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz. |

Frequency Stability vs. Temperature

Frequency Stability vs. Voltage

#### LTE band 2:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### LTE band 4, 7, 12, 17, 38, 41, 66:

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

#### LTE band 5:

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

| Frequency range (MHz) | Base, fixed (ppm) | Mobile >3 watts (ppm) | Mobile ≤3 watts (ppm) |
|-----------------------|-------------------|-----------------------|-----------------------|
| 25 to 50              | 20.0              | 20.0                  | 50.0                  |
| 50 to 450             | 5.0               | 5.0                   | 50.0                  |
| 450 to 512            | 2.5               | 5.0                   | 5.0                   |
| 821 to 896            | 1.5               | 2.5                   | 2.5                   |
| 928 to 929            | 5.0               | n/a                   | n/a                   |
| 929 to 960            | 1.5               | n/a                   | n/a                   |
| 2110 to 2220          | 10.0              | n/a                   | n/a                   |

## 5.2 Field Strength of Spurious Radiation Measurement

Note: All bandwidths, modulation types and RB configurations were pretested, and it was found that minimum bandwidths, QPSK modulation and 1RB0 were the worst modes, and only the worst modes were reflected in the report.

| LTE band 2 – 1.4 MHz bandwidth                                                                   |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3701.40                                                                                          | -49.80              | -1.20       | -51.00      | -13.00      | 38.00       | Vertical     |
| 5552.10                                                                                          | -45.96              | 4.26        | -41.70      | -13.00      | 28.70       | Vertical     |
| 7402.00                                                                                          | -54.25              | 9.05        | -45.20      | -13.00      | 32.20       | Vertical     |
| 3701.40                                                                                          | -52.55              | -1.20       | -53.75      | -13.00      | 40.75       | Horizontal   |
| 5552.10                                                                                          | -43.97              | 4.26        | -39.71      | -13.00      | 26.71       | Horizontal   |
| 7402.00                                                                                          | -55.43              | 9.05        | -46.38      | -13.00      | 33.38       | Horizontal   |
| Middle channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3760.00                                                                                          | -50.01              | -0.13       | -50.14      | -13.00      | 37.14       | Vertical     |
| 5640.00                                                                                          | -46.21              | 4.33        | -41.88      | -13.00      | 28.88       | Vertical     |
| 7520.00                                                                                          | -54.63              | 7.49        | -47.14      | -13.00      | 34.14       | Vertical     |
| 3760.00                                                                                          | -52.44              | -0.13       | -52.57      | -13.00      | 39.57       | Horizontal   |
| 5640.00                                                                                          | -44.13              | 4.33        | -39.80      | -13.00      | 26.80       | Horizontal   |
| 7520.00                                                                                          | -55.55              | 7.49        | -48.06      | -13.00      | 35.06       | Horizontal   |
| Highest channel                                                                                  |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3816.60                                                                                          | -50.39              | 1.02        | -49.37      | -13.00      | 36.37       | Vertical     |
| 5724.90                                                                                          | -46.00              | 4.09        | -41.91      | -13.00      | 28.91       | Vertical     |
| 7633.20                                                                                          | -54.64              | 8.06        | -46.58      | -13.00      | 33.58       | Vertical     |
| 3816.60                                                                                          | -52.12              | 1.02        | -51.10      | -13.00      | 38.10       | Horizontal   |
| 5724.90                                                                                          | -43.91              | 4.09        | -39.82      | -13.00      | 26.82       | Horizontal   |
| 7633.20                                                                                          | -55.48              | 8.06        | -47.42      | -13.00      | 34.42       | Horizontal   |
| <b>Remark:</b>                                                                                   |                     |             |             |             |             |              |
| 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |



| LTE band 5 – 1.4 MHz bandwidth                                                                                     |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1649.40                                                                                                            | -48.95              | -9.31       | -58.26      | -13.00      | 45.26       | Vertical     |
| 2474.10                                                                                                            | -47.94              | -9.74       | -57.68      | -13.00      | 44.68       | Vertical     |
| 3298.80                                                                                                            | -49.97              | -1.71       | -51.68      | -13.00      | 38.68       | Vertical     |
| 1649.40                                                                                                            | -44.37              | -9.31       | -53.68      | -13.00      | 40.68       | Horizontal   |
| 2474.10                                                                                                            | -51.54              | -9.74       | -61.28      | -13.00      | 48.28       | Horizontal   |
| 3298.80                                                                                                            | -46.71              | -1.71       | -48.42      | -13.00      | 35.42       | Horizontal   |
| Middle channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1673.30                                                                                                            | -48.85              | -8.43       | -57.28      | -13.00      | 44.28       | Vertical     |
| 2509.50                                                                                                            | -47.47              | -9.45       | -56.92      | -13.00      | 43.92       | Vertical     |
| 3346.00                                                                                                            | -49.87              | -2.15       | -52.02      | -13.00      | 39.02       | Vertical     |
| 1673.30                                                                                                            | -44.66              | -8.43       | -53.09      | -13.00      | 40.09       | Horizontal   |
| 2509.50                                                                                                            | -51.41              | -9.45       | -60.86      | -13.00      | 47.86       | Horizontal   |
| 3346.00                                                                                                            | -47.05              | -2.15       | -49.20      | -13.00      | 36.20       | Horizontal   |
| Highest channel                                                                                                    |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1696.60                                                                                                            | -48.66              | -7.58       | -56.24      | -13.00      | 43.24       | Vertical     |
| 2544.90                                                                                                            | -47.22              | -9.10       | -56.32      | -13.00      | 43.32       | Vertical     |
| 3393.20                                                                                                            | -49.77              | -2.40       | -52.17      | -13.00      | 39.17       | Vertical     |
| 1696.60                                                                                                            | -44.56              | -7.58       | -52.14      | -13.00      | 39.14       | Horizontal   |
| 2544.90                                                                                                            | -51.43              | -9.10       | -60.53      | -13.00      | 47.53       | Horizontal   |
| 3393.20                                                                                                            | -47.48              | -2.40       | -49.88      | -13.00      | 36.88       | Horizontal   |
| <b>Remark:</b><br>1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

| LTE band 7 – 5 MHz bandwidth                                                                     |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5005.00                                                                                          | -48.26              | 3.26        | -45.00      | -25.00      | 20.00       | Vertical     |
| 7507.50                                                                                          | -54.41              | 7.54        | -46.87      | -25.00      | 21.87       | Vertical     |
| 10010.00                                                                                         | -54.62              | 11.09       | -43.53      | -25.00      | 18.53       | Vertical     |
| 5005.00                                                                                          | -48.31              | 3.26        | -45.05      | -25.00      | 20.05       | Horizontal   |
| 7507.50                                                                                          | -56.15              | 7.54        | -48.61      | -25.00      | 23.61       | Horizontal   |
| 10010.00                                                                                         | -56.37              | 11.09       | -45.28      | -25.00      | 20.28       | Horizontal   |
| Middle channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5070.00                                                                                          | -48.44              | 3.49        | -44.95      | -25.00      | 19.95       | Vertical     |
| 7605.00                                                                                          | -54.41              | 7.59        | -46.82      | -25.00      | 21.82       | Vertical     |
| 10140.00                                                                                         | -55.10              | 12.52       | -42.58      | -25.00      | 17.58       | Vertical     |
| 5070.00                                                                                          | -48.20              | 3.49        | -44.71      | -25.00      | 19.71       | Horizontal   |
| 7605.00                                                                                          | -55.82              | 7.59        | -48.23      | -25.00      | 23.23       | Horizontal   |
| 10140.00                                                                                         | -56.28              | 12.52       | -43.76      | -25.00      | 18.76       | Horizontal   |
| Highest channel                                                                                  |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5135.00                                                                                          | -48.68              | 4.21        | -44.47      | -25.00      | 19.47       | Vertical     |
| 7702.50                                                                                          | -54.32              | 8.16        | -46.16      | -25.00      | 21.16       | Vertical     |
| 10270.00                                                                                         | -55.23              | 12.30       | -42.93      | -25.00      | 17.93       | Vertical     |
| 5135.00                                                                                          | -47.94              | 4.21        | -43.73      | -25.00      | 18.73       | Horizontal   |
| 7702.50                                                                                          | -55.94              | 8.16        | -47.78      | -25.00      | 22.78       | Horizontal   |
| 10270.00                                                                                         | -56.53              | 12.30       | -44.23      | -25.00      | 19.23       | Horizontal   |
| <b>Remark:</b>                                                                                   |                     |             |             |             |             |              |
| 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

| LTE band 12 – 1.4 MHz bandwidth                                                                                    |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1399.40                                                                                                            | -46.94              | -9.65       | -56.59      | -13.00      | 43.59       | Vertical     |
| 2099.10                                                                                                            | -52.17              | -7.33       | -59.50      | -13.00      | 46.50       | Vertical     |
| 2798.80                                                                                                            | -44.93              | -5.16       | -50.09      | -13.00      | 37.09       | Vertical     |
| 1399.40                                                                                                            | -37.31              | -9.65       | -46.96      | -13.00      | 33.96       | Horizontal   |
| 2099.10                                                                                                            | -52.29              | -7.33       | -59.62      | -13.00      | 46.62       | Horizontal   |
| 2798.80                                                                                                            | -51.19              | -5.16       | -56.35      | -13.00      | 43.35       | Horizontal   |
| Middle channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1415.00                                                                                                            | -47.01              | -9.64       | -56.65      | -13.00      | 43.65       | Vertical     |
| 2122.50                                                                                                            | -52.06              | -6.67       | -58.73      | -13.00      | 45.73       | Vertical     |
| 2830.00                                                                                                            | -45.20              | -4.96       | -50.16      | -13.00      | 37.16       | Vertical     |
| 1415.00                                                                                                            | -36.98              | -9.64       | -46.62      | -13.00      | 33.62       | Horizontal   |
| 2122.50                                                                                                            | -51.87              | -6.67       | -58.54      | -13.00      | 45.54       | Horizontal   |
| 2830.00                                                                                                            | -51.25              | -4.96       | -56.21      | -13.00      | 43.21       | Horizontal   |
| Highest channel                                                                                                    |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1430.60                                                                                                            | -47.26              | -9.83       | -57.09      | -13.00      | 44.09       | Vertical     |
| 2145.90                                                                                                            | -51.70              | -6.87       | -58.57      | -13.00      | 45.57       | Vertical     |
| 2861.20                                                                                                            | -44.91              | -5.01       | -49.92      | -13.00      | 36.92       | Vertical     |
| 1430.60                                                                                                            | -36.58              | -9.83       | -46.41      | -13.00      | 33.41       | Horizontal   |
| 2145.90                                                                                                            | -52.26              | -6.87       | -59.13      | -13.00      | 46.13       | Horizontal   |
| 2861.20                                                                                                            | -50.76              | -5.01       | -55.77      | -13.00      | 42.77       | Horizontal   |
| <b>Remark:</b><br>1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

| LTE band 17 – 5 MHz bandwidth                                                                                      |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1413.00                                                                                                            | -46.90              | -9.64       | -56.54      | -13.00      | 43.54       | Vertical     |
| 2119.50                                                                                                            | -54.83              | -6.65       | -61.48      | -13.00      | 48.48       | Vertical     |
| 2826.00                                                                                                            | -48.38              | -4.96       | -53.34      | -13.00      | 40.34       | Vertical     |
| 1413.00                                                                                                            | -43.44              | -9.64       | -53.08      | -13.00      | 40.08       | Horizontal   |
| 2119.50                                                                                                            | -52.52              | -6.65       | -59.17      | -13.00      | 46.17       | Horizontal   |
| 2826.00                                                                                                            | -51.67              | -4.96       | -56.63      | -13.00      | 43.63       | Horizontal   |
| Middle channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1420.00                                                                                                            | -46.87              | -9.64       | -56.51      | -13.00      | 43.51       | Vertical     |
| 2130.00                                                                                                            | -54.42              | -6.73       | -61.15      | -13.00      | 48.15       | Vertical     |
| 2840.00                                                                                                            | -48.15              | -4.98       | -53.13      | -13.00      | 40.13       | Vertical     |
| 1420.00                                                                                                            | -43.45              | -9.64       | -53.09      | -13.00      | 40.09       | Horizontal   |
| 2130.00                                                                                                            | -52.39              | -6.73       | -59.12      | -13.00      | 46.12       | Horizontal   |
| 2840.00                                                                                                            | -51.75              | -4.98       | -56.73      | -13.00      | 43.73       | Horizontal   |
| Highest channel                                                                                                    |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 1427.00                                                                                                            | -47.32              | -9.75       | -57.07      | -13.00      | 44.07       | Vertical     |
| 2140.50                                                                                                            | -54.47              | -6.82       | -61.29      | -13.00      | 48.29       | Vertical     |
| 2854.00                                                                                                            | -48.48              | -5.00       | -53.48      | -13.00      | 40.48       | Vertical     |
| 1427.00                                                                                                            | -42.97              | -9.75       | -52.72      | -13.00      | 39.72       | Horizontal   |
| 2140.50                                                                                                            | -52.32              | -6.82       | -59.14      | -13.00      | 46.14       | Horizontal   |
| 2854.00                                                                                                            | -51.38              | -5.00       | -56.38      | -13.00      | 43.38       | Horizontal   |
| <b>Remark:</b><br>1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

**LTE band 40(2305MHz-2315MHz) – 5 MHz bandwidth**

**Lowest channel**

| Frequency (MHz) | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| 4615.00         | -51.71              | 3.55        | -48.16      | -40.00      | 8.16        | Vertical     |
| 6922.50         | -55.19              | 7.72        | -47.47      | -40.00      | 7.47        | Vertical     |
| 9230.00         | -56.17              | 12.53       | -43.64      | -40.00      | 3.64        | Vertical     |
| 4615.00         | -49.46              | 3.55        | -45.91      | -40.00      | 5.91        | Horizontal   |
| 6922.50         | -56.56              | 7.72        | -48.84      | -40.00      | 8.84        | Horizontal   |
| 9230.00         | -56.19              | 12.53       | -43.66      | -40.00      | 3.66        | Horizontal   |

**Middle channel**

| Frequency (MHz) | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| 4620.00         | -51.33              | 3.75        | -47.58      | -40.00      | 7.58        | Vertical     |
| 6930.00         | -55.12              | 9.12        | -46.00      | -40.00      | 6.00        | Vertical     |
| 9240.00         | -56.95              | 11.03       | -45.92      | -40.00      | 5.92        | Vertical     |
| 4620.00         | -49.63              | 3.75        | -45.88      | -40.00      | 5.88        | Horizontal   |
| 6930.00         | -56.58              | 9.12        | -47.46      | -40.00      | 7.46        | Horizontal   |
| 9240.00         | -57.05              | 11.03       | -46.02      | -40.00      | 6.02        | Horizontal   |

**Highest channel**

| Frequency (MHz) | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| 4625.00         | -51.61              | 3.53        | -48.08      | -40.00      | 8.08        | Vertical     |
| 6937.50         | -55.13              | 9.71        | -45.42      | -40.00      | 5.42        | Vertical     |
| 9250.00         | -56.87              | 13.11       | -43.76      | -40.00      | 3.76        | Vertical     |
| 4625.00         | -49.97              | 3.53        | -46.44      | -40.00      | 6.44        | Horizontal   |
| 6937.50         | -56.95              | 9.71        | -47.24      | -40.00      | 7.24        | Horizontal   |
| 9250.00         | -56.82              | 13.11       | -43.71      | -40.00      | 3.71        | Horizontal   |

**Remark:**

1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

| LTE band 40(2350MHz-2360MHz) – 5 MHz bandwidth                                                                     |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 4705.00                                                                                                            | -51.47              | 3.55        | -47.92      | -40.00      | 7.92        | Vertical     |
| 7057.50                                                                                                            | -54.80              | 7.72        | -47.08      | -40.00      | 7.08        | Vertical     |
| 9410.00                                                                                                            | -56.32              | 12.53       | -43.79      | -40.00      | 3.79        | Vertical     |
| 4705.00                                                                                                            | -49.77              | 3.55        | -46.22      | -40.00      | 6.22        | Horizontal   |
| 7057.50                                                                                                            | -56.80              | 7.72        | -49.08      | -40.00      | 9.08        | Horizontal   |
| 9410.00                                                                                                            | -55.84              | 12.53       | -43.31      | -40.00      | 3.31        | Horizontal   |
| Middle channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 4710.00                                                                                                            | -51.64              | 3.75        | -47.89      | -40.00      | 7.89        | Vertical     |
| 7065.00                                                                                                            | -55.42              | 9.12        | -46.30      | -40.00      | 6.30        | Vertical     |
| 9420.00                                                                                                            | -56.76              | 11.03       | -45.73      | -40.00      | 5.73        | Vertical     |
| 4710.00                                                                                                            | -49.86              | 3.75        | -46.11      | -40.00      | 6.11        | Horizontal   |
| 7065.00                                                                                                            | -56.55              | 9.12        | -47.43      | -40.00      | 7.43        | Horizontal   |
| 9420.00                                                                                                            | -56.38              | 11.03       | -45.35      | -40.00      | 5.35        | Horizontal   |
| Highest channel                                                                                                    |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 4175.00                                                                                                            | -51.21              | 3.53        | -47.68      | -40.00      | 7.68        | Vertical     |
| 7072.50                                                                                                            | -55.47              | 9.71        | -45.76      | -40.00      | 5.76        | Vertical     |
| 9430.00                                                                                                            | -56.79              | 13.11       | -43.68      | -40.00      | 3.68        | Vertical     |
| 4175.00                                                                                                            | -50.14              | 3.53        | -46.61      | -40.00      | 6.61        | Horizontal   |
| 7072.50                                                                                                            | -56.96              | 9.71        | -47.25      | -40.00      | 7.25        | Horizontal   |
| 9430.00                                                                                                            | -56.67              | 13.11       | -43.56      | -40.00      | 3.56        | Horizontal   |
| <b>Remark:</b><br>1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

| LTE band 41 – 5 MHz bandwidth                                                                    |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5075.00                                                                                          | -51.76              | 3.55        | -48.21      | -25.00      | 23.21       | Vertical     |
| 7612.50                                                                                          | -55.20              | 7.72        | -47.48      | -25.00      | 22.48       | Vertical     |
| 10150.00                                                                                         | -56.52              | 12.53       | -43.99      | -25.00      | 18.99       | Vertical     |
| 5075.00                                                                                          | -49.77              | 3.55        | -46.22      | -25.00      | 21.22       | Horizontal   |
| 7612.50                                                                                          | -56.78              | 7.72        | -49.06      | -25.00      | 24.06       | Horizontal   |
| 10150.00                                                                                         | -56.27              | 12.53       | -43.74      | -25.00      | 18.74       | Horizontal   |
| Middle channel                                                                                   |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5190.00                                                                                          | -51.53              | 3.75        | -47.78      | -25.00      | 22.78       | Vertical     |
| 7785.00                                                                                          | -55.08              | 9.12        | -45.96      | -25.00      | 20.96       | Vertical     |
| 10380.00                                                                                         | -56.61              | 11.03       | -45.58      | -25.00      | 20.58       | Vertical     |
| 5190.00                                                                                          | -49.84              | 3.75        | -46.09      | -25.00      | 21.09       | Horizontal   |
| 7785.00                                                                                          | -56.86              | 9.12        | -47.74      | -25.00      | 22.74       | Horizontal   |
| 10380.00                                                                                         | -56.62              | 11.03       | -45.59      | -25.00      | 20.59       | Horizontal   |
| Highest channel                                                                                  |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                  | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 5305.00                                                                                          | -51.68              | 3.53        | -48.15      | -25.00      | 23.15       | Vertical     |
| 7957.50                                                                                          | -55.35              | 9.71        | -45.64      | -25.00      | 20.64       | Vertical     |
| 10610.00                                                                                         | -56.86              | 13.11       | -43.75      | -25.00      | 18.75       | Vertical     |
| 5305.00                                                                                          | -50.03              | 3.53        | -46.50      | -25.00      | 21.50       | Horizontal   |
| 7957.50                                                                                          | -57.32              | 9.71        | -47.61      | -25.00      | 22.61       | Horizontal   |
| 10610.00                                                                                         | -56.50              | 13.11       | -43.39      | -25.00      | 18.39       | Horizontal   |
| <b>Remark:</b>                                                                                   |                     |             |             |             |             |              |
| 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

| LTE band 66 – 1.4 MHz bandwidth                                                                                    |                     |             |             |             |             |              |
|--------------------------------------------------------------------------------------------------------------------|---------------------|-------------|-------------|-------------|-------------|--------------|
| Lowest channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3421.40                                                                                                            | -51.09              | -1.85       | -52.94      | -13.00      | 39.94       | Vertical     |
| 5132.10                                                                                                            | -46.11              | 4.23        | -41.88      | -13.00      | 28.88       | Vertical     |
| 6842.80                                                                                                            | -54.41              | 7.50        | -46.91      | -13.00      | 33.91       | Vertical     |
| 3421.40                                                                                                            | -48.74              | -1.85       | -50.59      | -13.00      | 37.59       | Horizontal   |
| 5132.10                                                                                                            | -40.27              | 4.23        | -36.04      | -13.00      | 23.04       | Horizontal   |
| 6842.80                                                                                                            | -53.83              | 7.50        | -46.33      | -13.00      | 33.33       | Horizontal   |
| Middle channel                                                                                                     |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3490.00                                                                                                            | -51.00              | -0.74       | -51.74      | -13.00      | 38.74       | Vertical     |
| 5235.00                                                                                                            | -46.00              | 3.54        | -42.46      | -13.00      | 29.46       | Vertical     |
| 6980.00                                                                                                            | -53.98              | 7.17        | -46.81      | -13.00      | 33.81       | Vertical     |
| 3490.00                                                                                                            | -48.54              | -0.74       | -49.28      | -13.00      | 36.28       | Horizontal   |
| 5235.00                                                                                                            | -40.72              | 3.54        | -37.18      | -13.00      | 24.18       | Horizontal   |
| 6980.00                                                                                                            | -53.87              | 7.17        | -46.70      | -13.00      | 33.70       | Horizontal   |
| Highest channel                                                                                                    |                     |             |             |             |             |              |
| Frequency (MHz)                                                                                                    | Reading Level (dBm) | Factor (dB) | Level (dBm) | Limit (dBm) | Margin (dB) | Polarization |
| 3558.60                                                                                                            | -51.14              | -0.57       | -51.71      | -13.00      | 38.71       | Vertical     |
| 5337.90                                                                                                            | -46.25              | 3.78        | -42.47      | -13.00      | 29.47       | Vertical     |
| 7117.20                                                                                                            | -54.41              | 7.30        | -47.11      | -13.00      | 34.11       | Vertical     |
| 3558.60                                                                                                            | -48.99              | -0.57       | -49.56      | -13.00      | 36.56       | Horizontal   |
| 5337.90                                                                                                            | -40.34              | 3.78        | -36.56      | -13.00      | 23.56       | Horizontal   |
| 7117.20                                                                                                            | -53.71              | 7.30        | -46.41      | -13.00      | 33.41       | Horizontal   |
| <b>Remark:</b><br>1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report. |                     |             |             |             |             |              |

-----End of report-----