


Maximum location: X=2.00, Y=-30.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.020354 |
| SAR 1g (W/Kg)  | 0.024216 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.0536 | 0.0238 | 0.0205 | 0.0195 | 0.0235 | 0.0178 | 0.0239 | 0.0177 | 0.0180 |

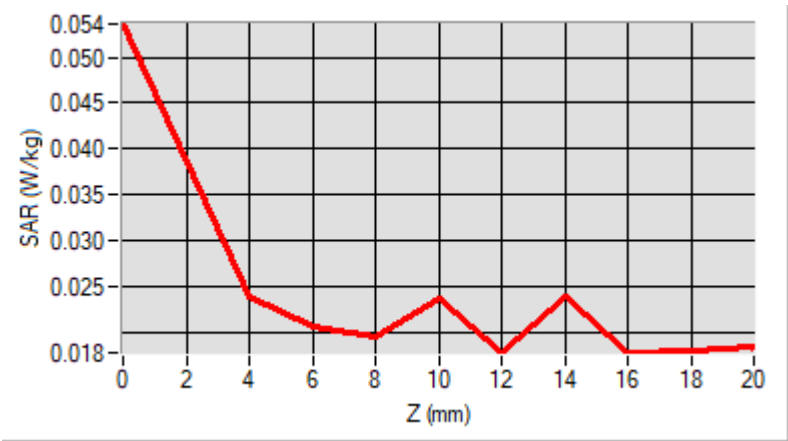

F. 3D Image

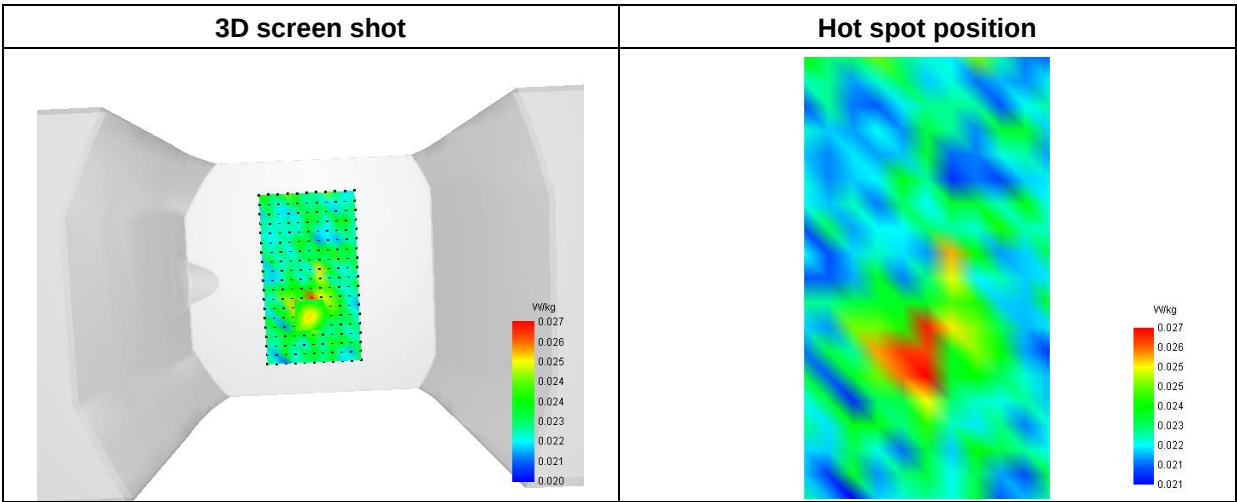

MEASUREMENT 22

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-07  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                      |
|-----------------|--------------------------------------|
| Area Scan       | dx=8mm dy=8mm                        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm                 |
| Phantom         | Flat Plane                           |
| Device Position | Back                                 |
| Band            | 5G NR-N78_3450-3550MHz               |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3500.000000 |
| Relative Permittivity (real part) | 50.522187   |
| Conductivity (S/m)                | 3.251428    |
| Power Variation (%)               | 2.171000    |
| Ambient Temperature               | 23.4        |
| Liquid Temperature                | 23.4        |

C. SAR Surface and Volume

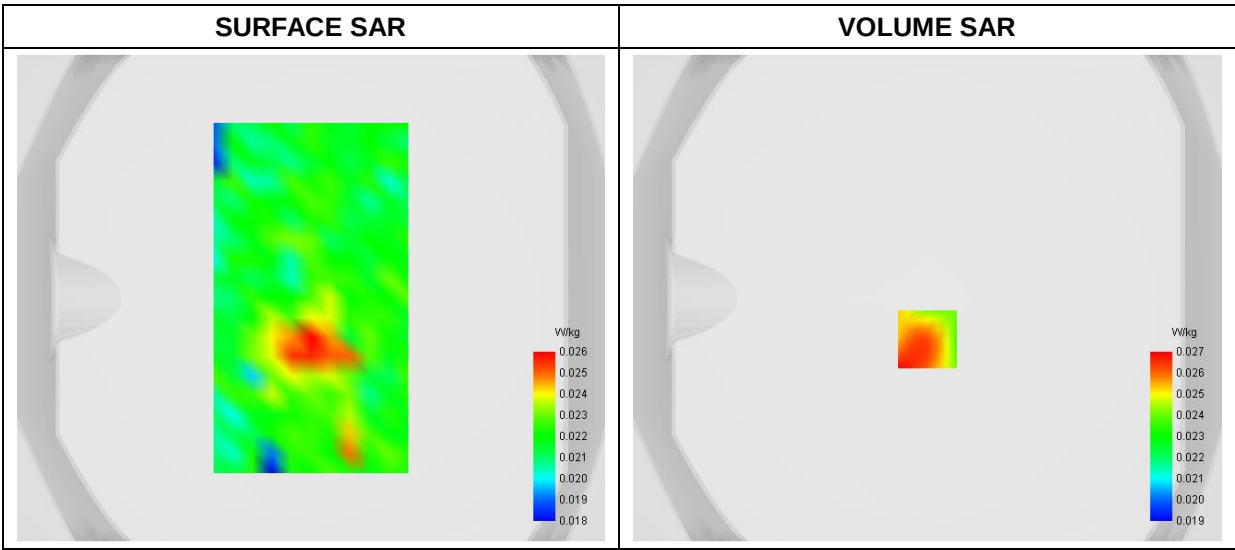


Maximum location: X=0.00, Y=-16.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.018477 |
| SAR 1g (W/Kg)  | 0.019905 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.0811 | 0.0236 | 0.0174 | 0.0156 | 0.0231 | 0.0142 | 0.0235 | 0.0169 | 0.0169 |

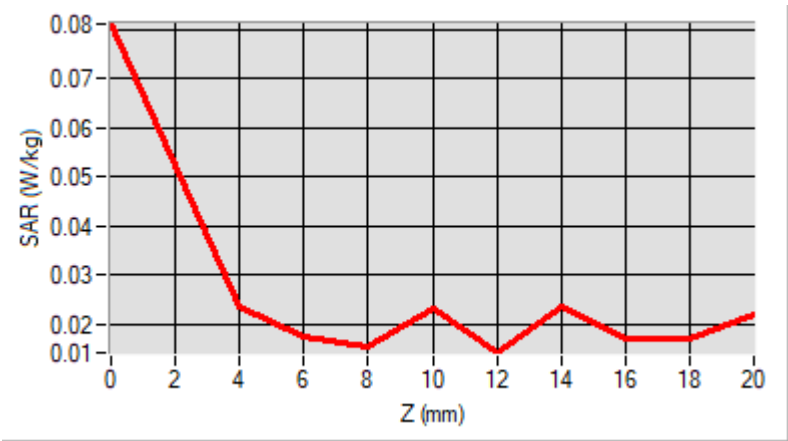

F. 3D Image

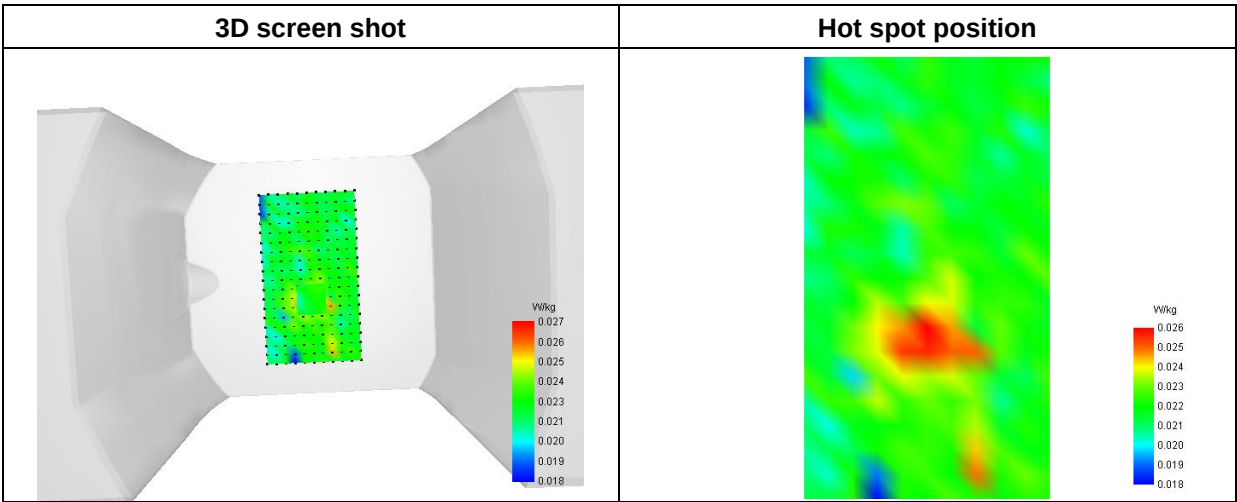

MEASUREMENT 23

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-07  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                    |
|-----------------|------------------------------------|
| Area Scan       | dx=8mm dy=8mm                      |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm               |
| Phantom         | Flat Plane                         |
| Device Position | Back                               |
| Band            | 5G NR-N78_3700-3800MHz             |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                     |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3750.000000 |
| Relative Permittivity (real part) | 48.524890   |
| Conductivity (S/m)                | 3.562508    |
| Power Variation (%)               | 1.374600    |
| Ambient Temperature               | 23.4        |
| Liquid Temperature                | 23.4        |

C. SAR Surface and Volume

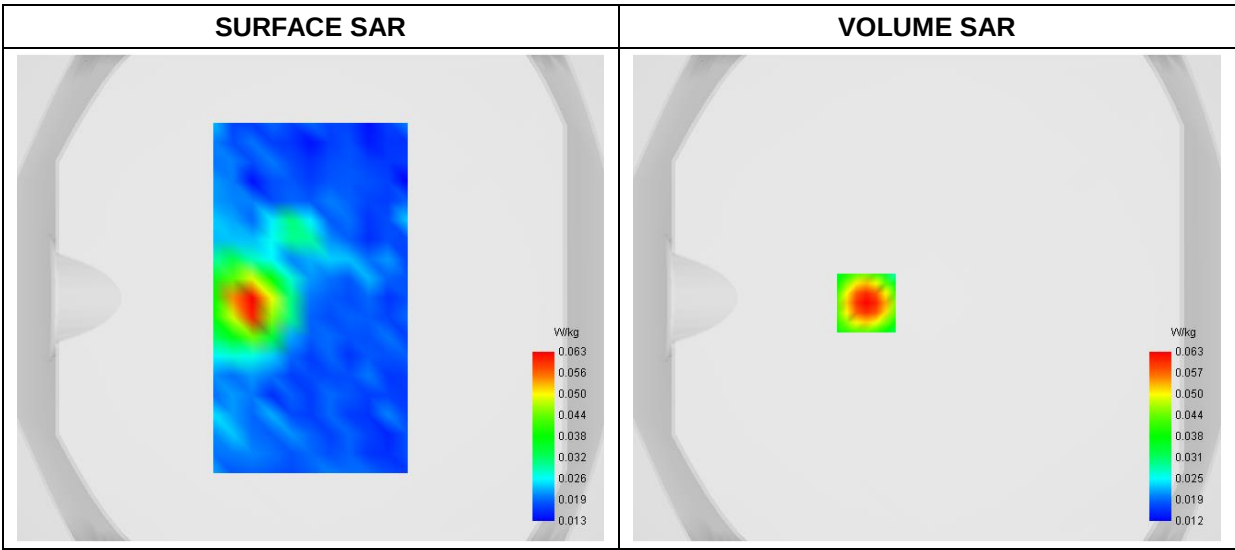


Maximum location: X=-25.00, Y=-2.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.032464 |
| SAR 1g (W/Kg)  | 0.061096 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.1342 | 0.0630 | 0.0429 | 0.0298 | 0.0219 | 0.0174 | 0.0149 | 0.0138 | 0.0135 |

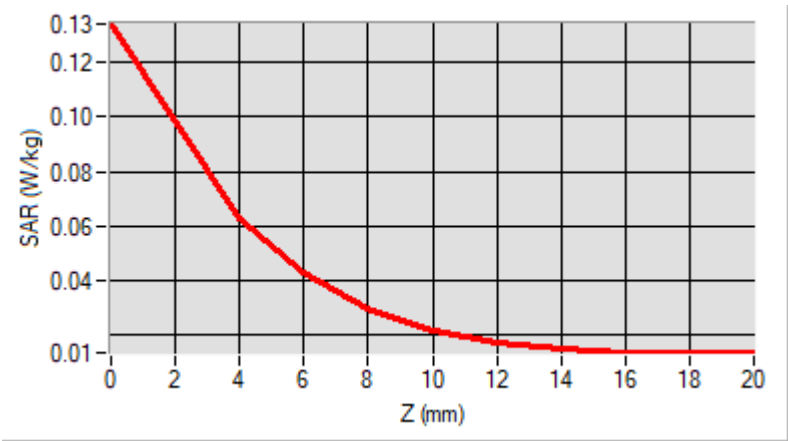

F. 3D Image

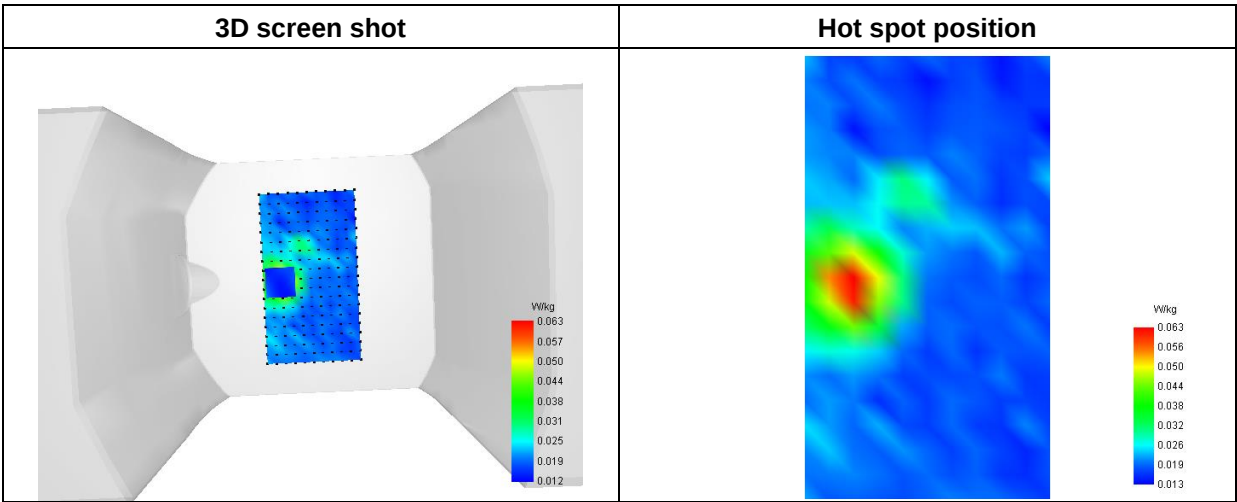

MEASUREMENT 24

Type: Phone measurement (Complete)  
Date of measurement: 2023-02-15  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | DC_5A_n41A                        |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Low |
| Signal          | Duty Cycle 1:1                    |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2593.000000 |
| Relative Permittivity (real part) | 53.262874   |
| Conductivity (S/m)                | 2.092264    |
| Power Variation (%)               | 1.462814    |
| Ambient Temperature               | 23.5        |
| Liquid Temperature                | 23.5        |

C. SAR Surface and Volume

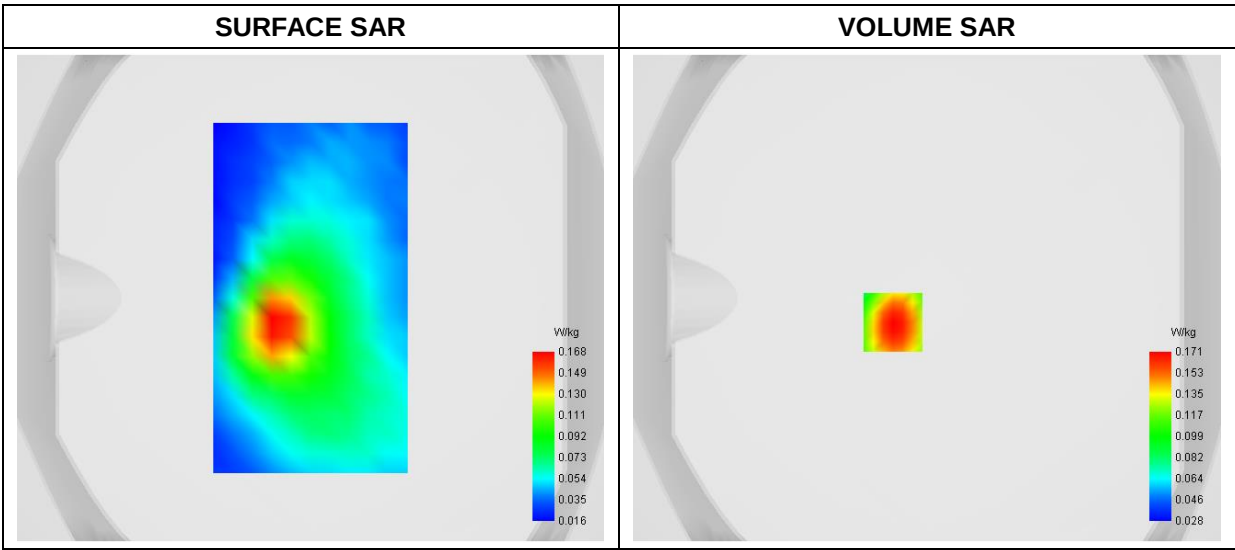


Maximum location: X=-14.00, Y=-10.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.098795 |
| SAR 1g (W/Kg)  | 0.160185 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.2705 | 0.1709 | 0.1372 | 0.1111 | 0.0916 | 0.0768 | 0.0655 | 0.0566 | 0.0493 |

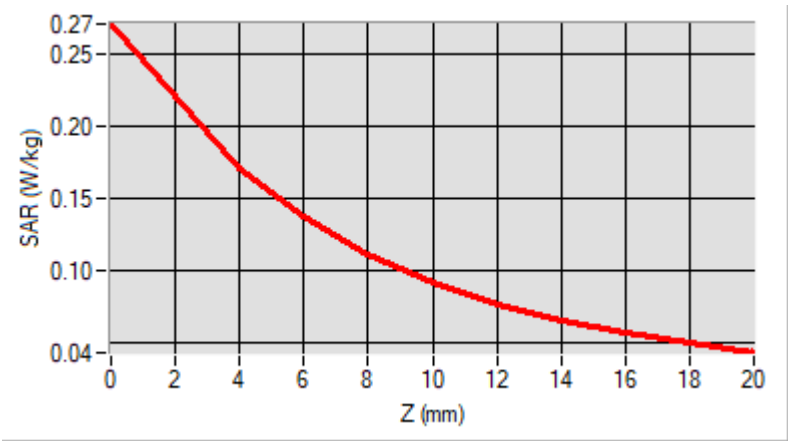

F. 3D Image

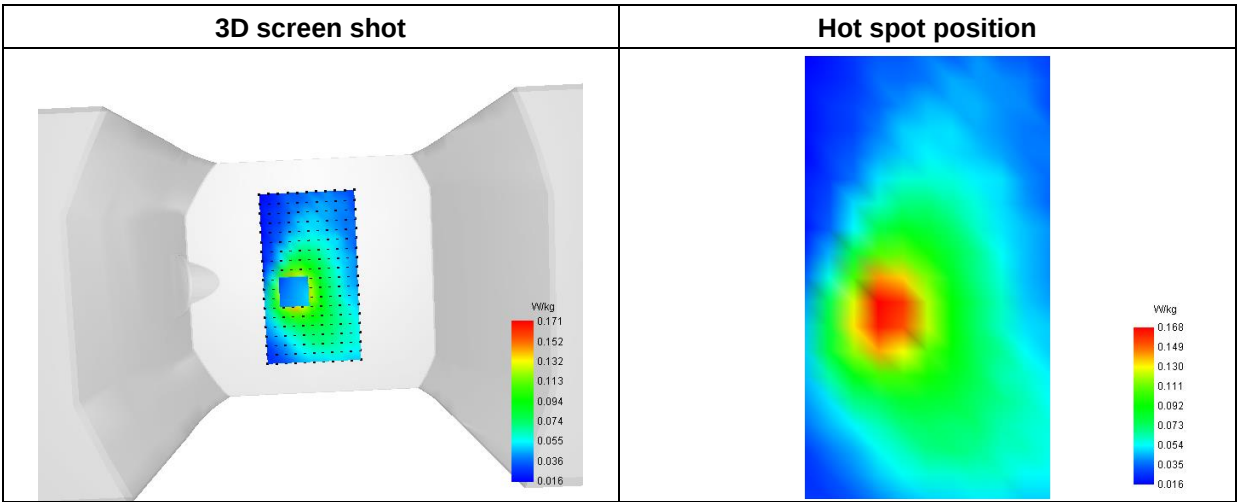

MEASUREMENT 25

Type: Phone measurement (Complete)  
Date of measurement: 2023-02-15  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                    |
|-----------------|------------------------------------|
| Area Scan       | dx=8mm dy=8mm                      |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm               |
| Phantom         | Flat Plane                         |
| Device Position | Back                               |
| Band            | DC_2A_N78A_3450-3550MHz            |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, High |
| Signal          | Duty Cycle 1:1                     |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2560.000000 |
| Relative Permittivity (real part) | 53.251092   |
| Conductivity (S/m)                | 2.081764    |
| Power Variation (%)               | -1.420000   |
| Ambient Temperature               | 23.5        |
| Liquid Temperature                | 23.5        |

C. SAR Surface and Volume

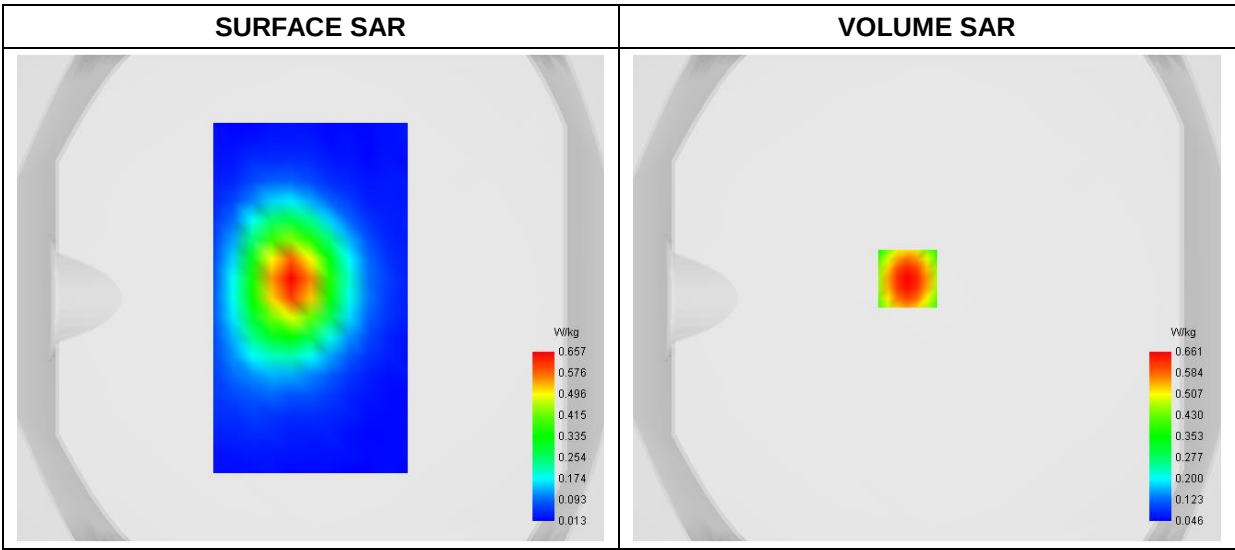


Maximum location: X=-8.00, Y=8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.314549 |
| SAR 1g (W/Kg)  | 0.620095 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 1.2473 | 0.6608 | 0.4775 | 0.3449 | 0.2528 | 0.1886 | 0.1434 | 0.1106 | 0.0858 |

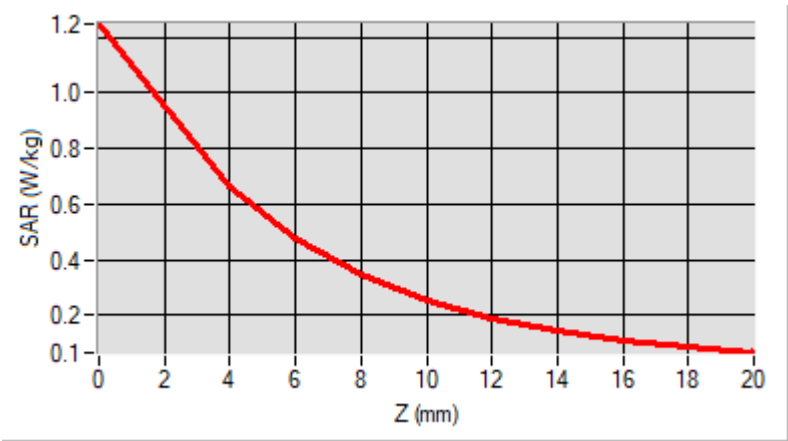

F. 3D Image

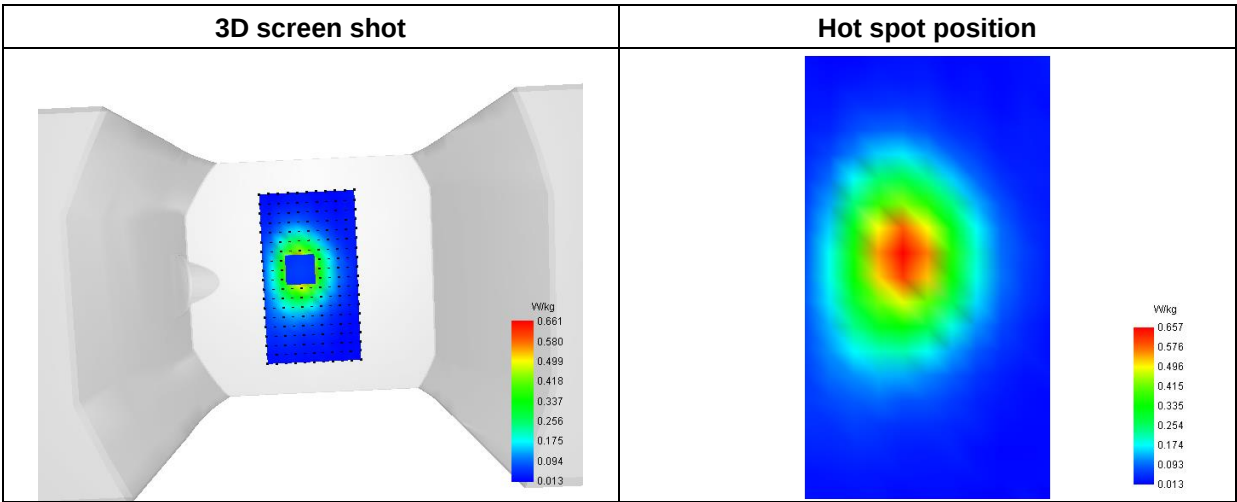

MEASUREMENT 26

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-07  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                      |
|-----------------|--------------------------------------|
| Area Scan       | dx=8mm dy=8mm                        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm                 |
| Phantom         | Flat Plane                           |
| Device Position | Back                                 |
| Band            | DC_2A_N78A_3700-3800MHz              |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3750.000000 |
| Relative Permittivity (real part) | 48.522457   |
| Conductivity (S/m)                | 3.562459    |
| Power Variation (%)               | 0.361700    |
| Ambient Temperature               | 23.4        |
| Liquid Temperature                | 23.4        |

C. SAR Surface and Volume

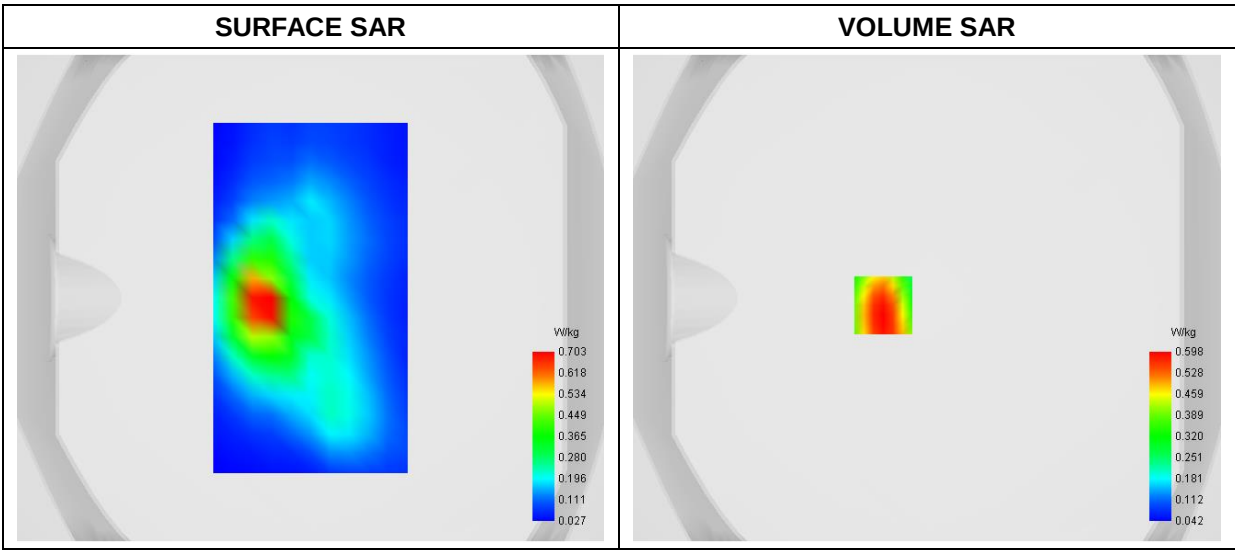


Maximum location: X=-18.00, Y=-3.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.287459 |
| SAR 1g (W/Kg)  | 0.602227 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 1.2486 | 0.5978 | 0.4225 | 0.2898 | 0.2402 | 0.1525 | 0.1389 | 0.0924 | 0.0752 |

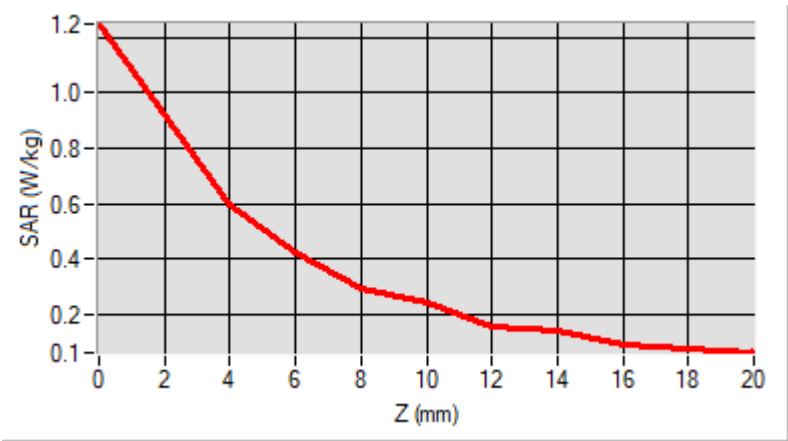

F. 3D Image

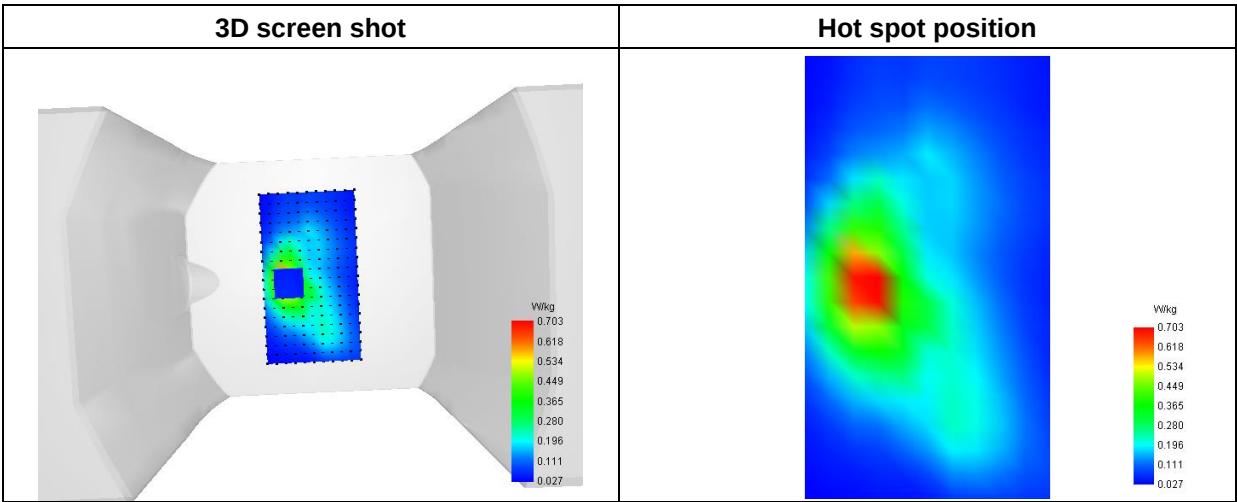

MEASUREMENT 27

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-07  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                     |
|-----------------|-------------------------------------|
| Area Scan       | dx=8mm dy=8mm                       |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm                |
| Phantom         | Flat Plane                          |
| Device Position | Back                                |
| Band            | DC_12A_N77A_3450-3550MHz            |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB,Middle |
| Signal          | Duty Cycle 1:1                      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3500.000000 |
| Relative Permittivity (real part) | 50.521634   |
| Conductivity (S/m)                | 3.253645    |
| Power Variation (%)               | 1.650000    |
| Ambient Temperature               | 23.4        |
| Liquid Temperature                | 23.4        |

C. SAR Surface and Volume

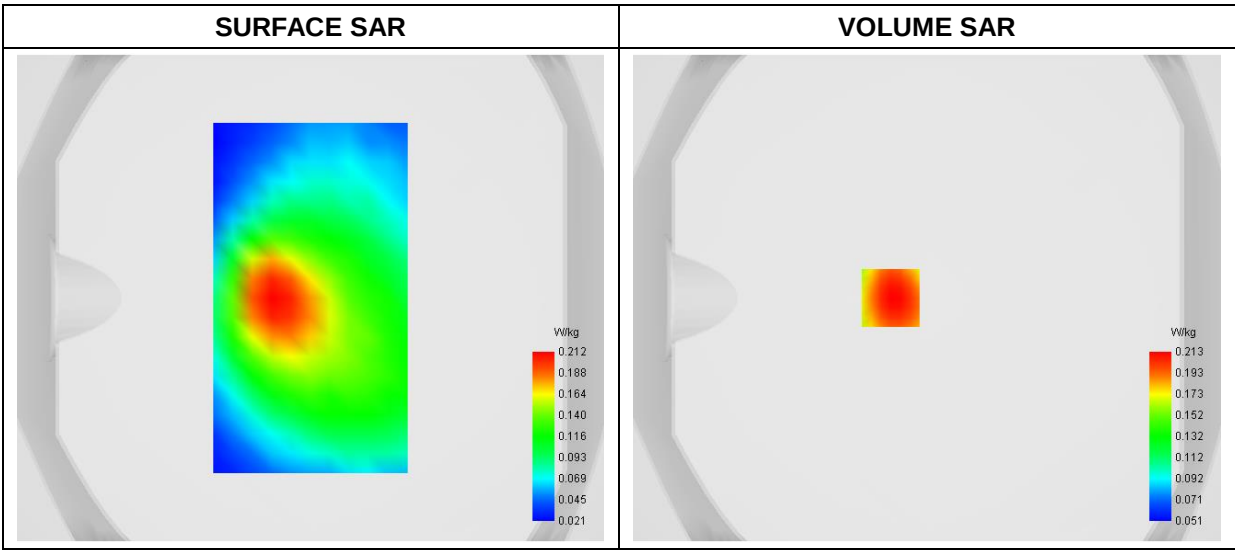


Maximum location: X=-15.00, Y=0.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.138441 |
| SAR 1g (W/Kg)  | 0.205850 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.2927 | 0.2133 | 0.1829 | 0.1574 | 0.1361 | 0.1183 | 0.1030 | 0.0898 | 0.0781 |

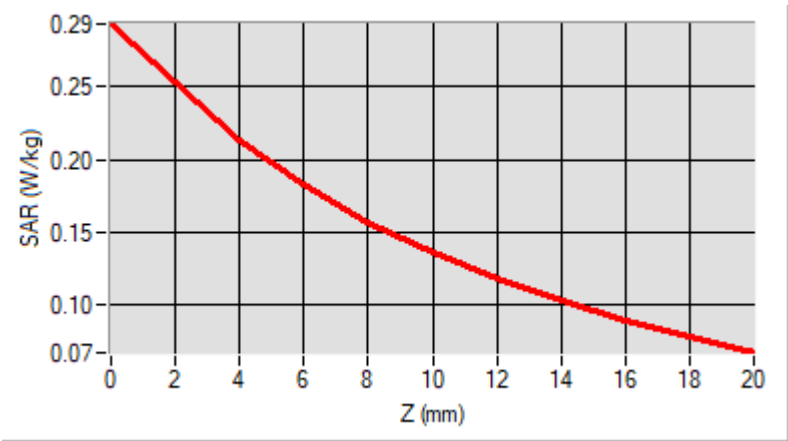

F. 3D Image

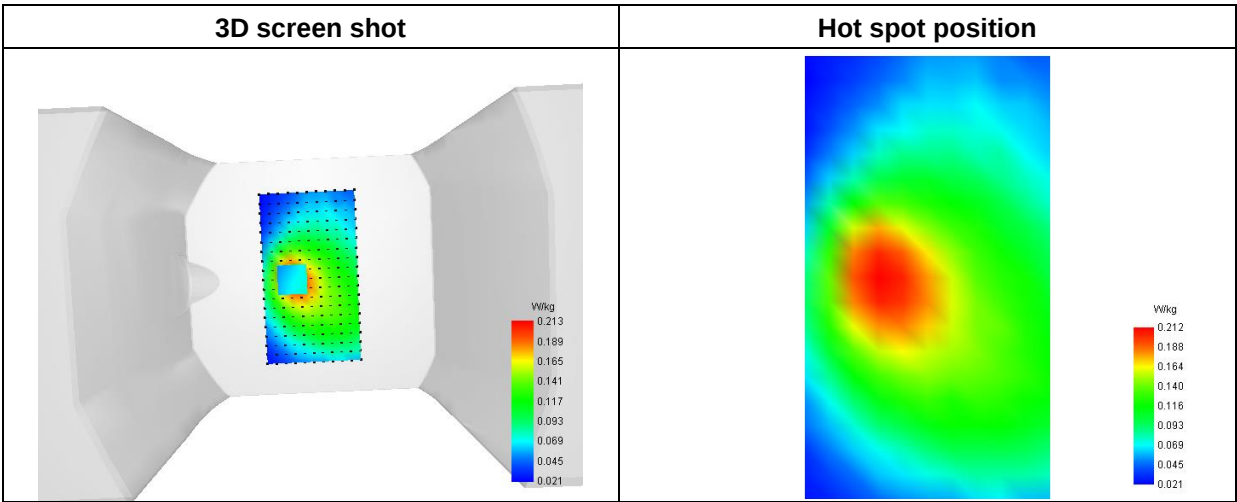

MEASUREMENT 28

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-07  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                      |
|-----------------|--------------------------------------|
| Area Scan       | dx=8mm dy=8mm                        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm                 |
| Phantom         | Flat Plane                           |
| Device Position | Back                                 |
| Band            | DC_12A_N77A_3700-3980MHz             |
| Channels        | DFT-s-OFDM QPSK, 100MHz, 1RB, Middle |
| Signal          | Duty Cycle 1:1                       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 3845.000000 |
| Relative Permittivity (real part) | 47.812631   |
| Conductivity (S/m)                | 4.043625    |
| Power Variation (%)               | 1.860000    |
| Ambient Temperature               | 23.4        |
| Liquid Temperature                | 23.4        |

C. SAR Surface and Volume

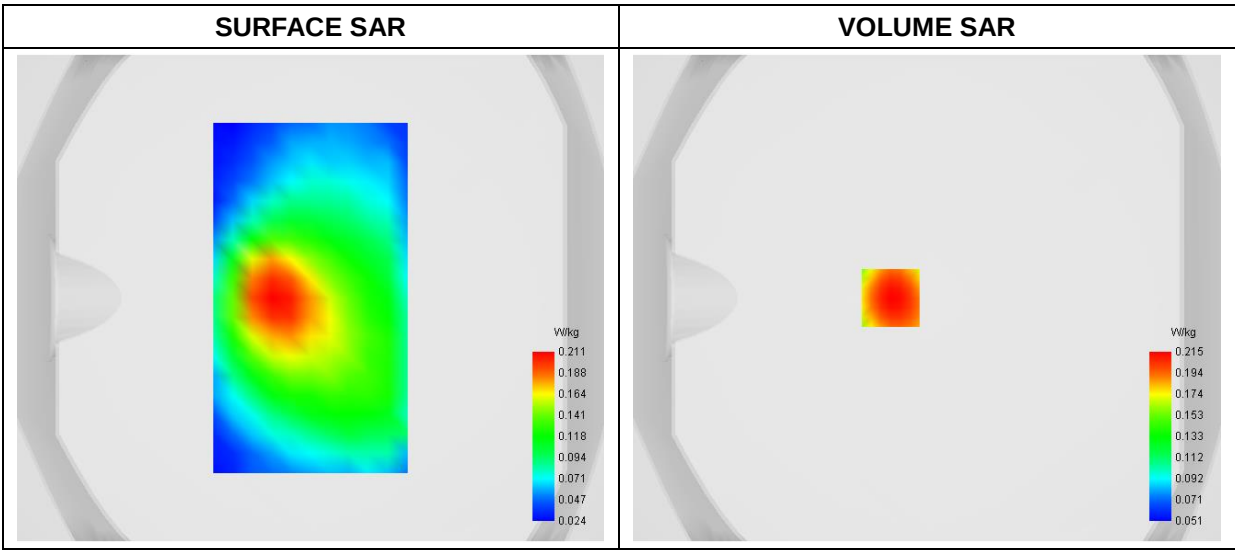


Maximum location: X=-15.00, Y=0.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.139317 |
| SAR 1g (W/Kg)  | 0.205872 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.2947 | 0.2150 | 0.1845 | 0.1588 | 0.1374 | 0.1194 | 0.1041 | 0.0907 | 0.0789 |

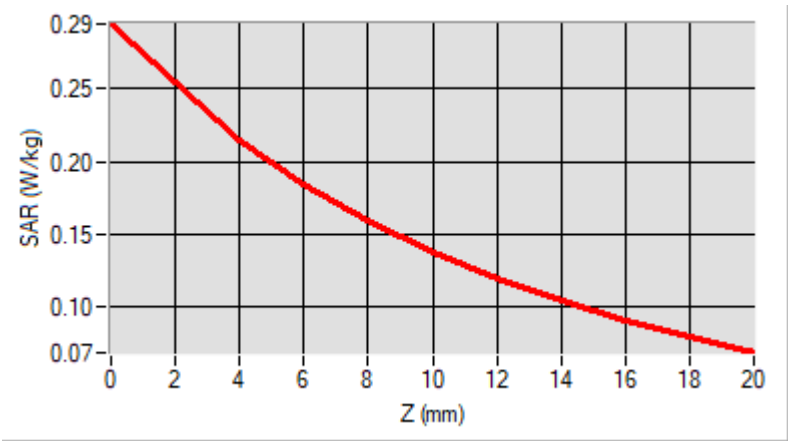

F. 3D Image

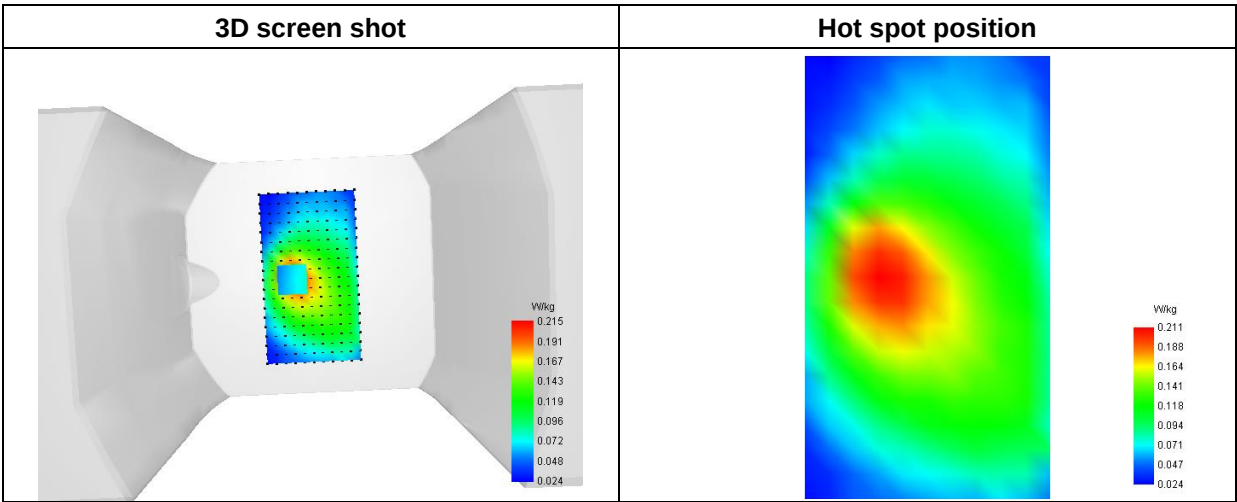

MEASUREMENT 29

Type: Phone measurement (Complete)  
Date of measurement: 2023-02-15  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back                 |
| Band            | WiFi_802.11b-ANT1    |
| Channels        | Low                  |
| Signal          | Duty Cycle 1:1       |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2412.000000 |
| Relative Permittivity (real part) | 53.570212   |
| Conductivity (S/m)                | 1.932554    |
| Power Variation (%)               | 2.403721    |
| Ambient Temperature               | 23.5        |
| Liquid Temperature                | 23.5        |

C. SAR Surface and Volume

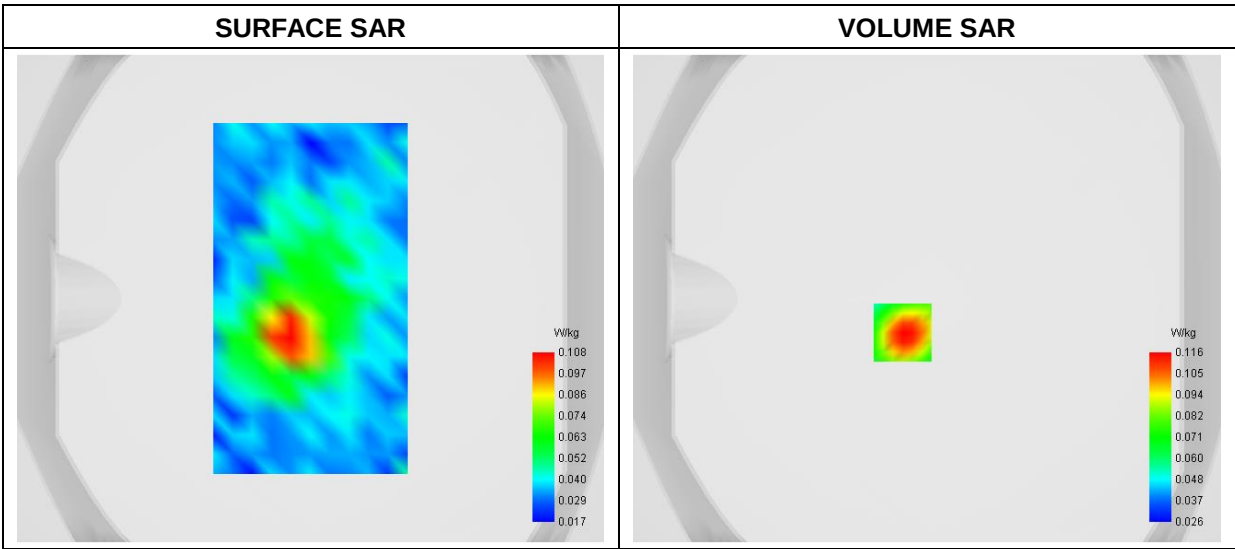


Maximum location: X=-10.00, Y=-14.00

D. SAR 1g & 10g

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.064258 |
| SAR 1g (W/Kg)  | 0.114406 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.2482 | 0.1161 | 0.0794 | 0.0560 | 0.0424 | 0.0352 | 0.0321 | 0.0316 | 0.0329 |

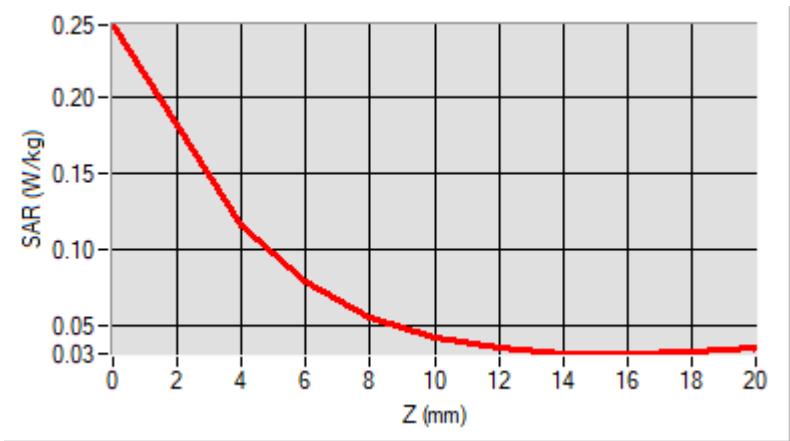

F. 3D Image

|                                                                                                                                            |                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| 3D screen shot                                                                                                                             | Hot spot position                                                                                                 |
| <p>A 3D rendering of a device with a color-coded SAR distribution map on its surface. The color scale ranges from 0.017 to 0.116 W/kg.</p> | <p>A 2D color-coded SAR distribution map showing a hot spot. The color scale ranges from 0.017 to 0.108 W/kg.</p> |

MEASUREMENT 30

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm      |
| Phantom         | Flat Plane                |
| Device Position | Front                     |
| Band            | WiFi(5.2GHz)_802.11a-ANT1 |
| Channels        | Middle                    |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5200.000000 |
| Relative Permittivity (real part) | 47.112911   |
| Conductivity (S/m)                | 5.431483    |
| Power Variation (%)               | 0.542660    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

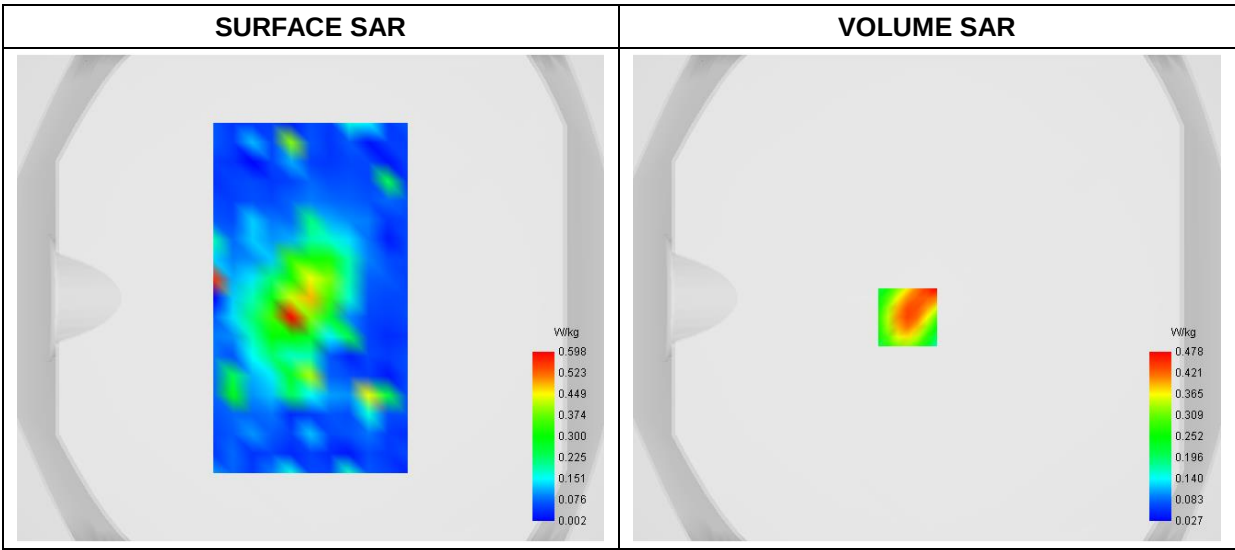


Maximum location: X=-8.00, Y=-8.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.128672 |
| SAR 1g (W/Kg)  | 0.275572 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.9813 | 0.4776 | 0.1533 | 0.1488 | 0.0871 | 0.0574 | 0.0674 | 0.0424 | 0.0509 |

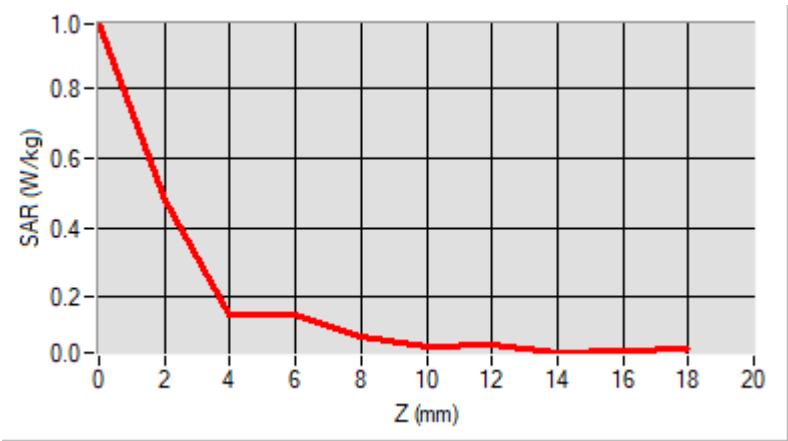

F. 3D Image

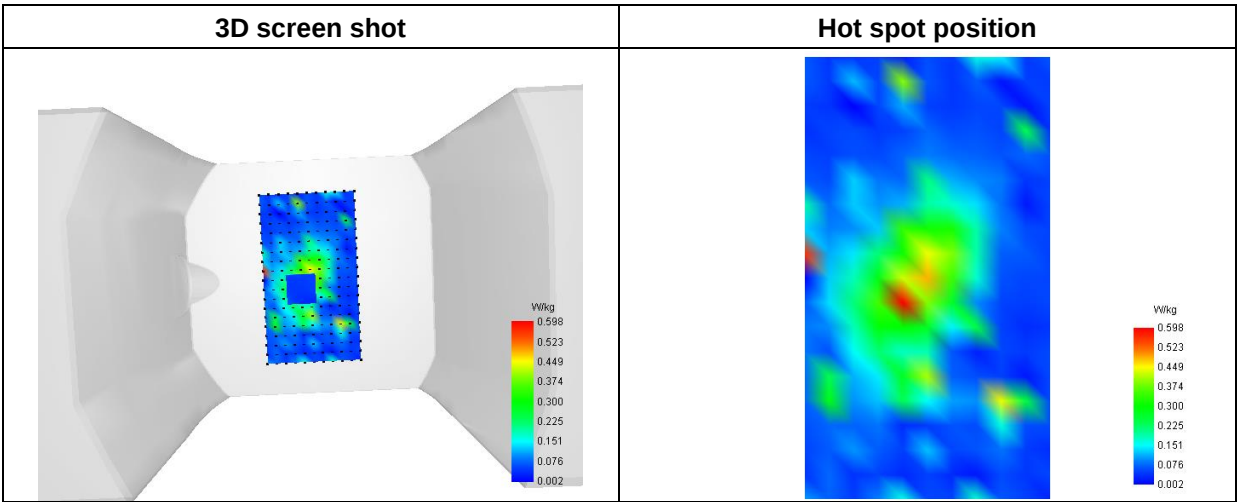

MEASUREMENT 31

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm      |
| Phantom         | Flat Plane                |
| Device Position | Front                     |
| Band            | WiFi(5.3GHz)_802.11a-ANT1 |
| Channels        | Middle                    |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5260.000000 |
| Relative Permittivity (real part) | 47.122839   |
| Conductivity (S/m)                | 5.432192    |
| Power Variation (%)               | 0.463782    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

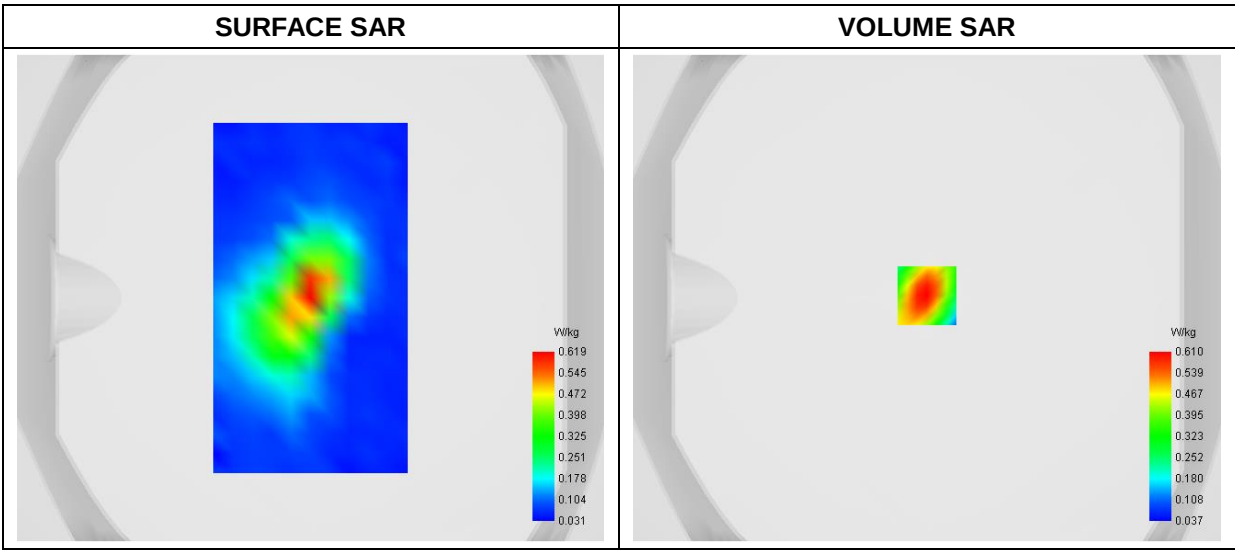


Maximum location: X=0.00, Y=1.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.157259 |
| SAR 1g (W/Kg)  | 0.362892 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 1.0346 | 0.6104 | 0.3422 | 0.1875 | 0.1076 | 0.0688 | 0.0519 | 0.0469 | 0.0490 |

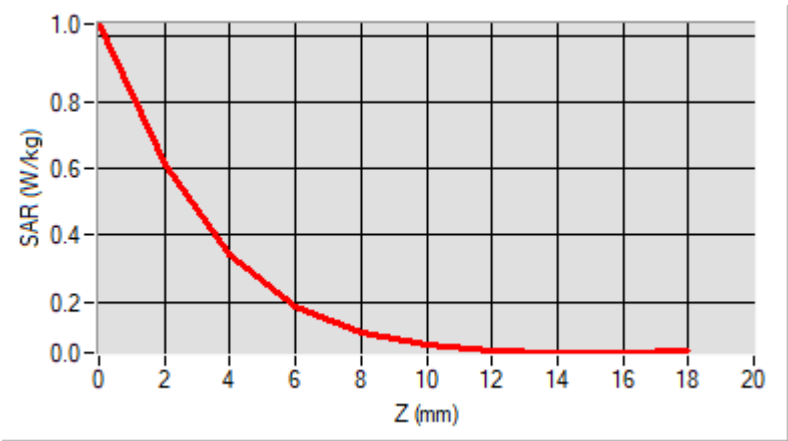

F. 3D Image

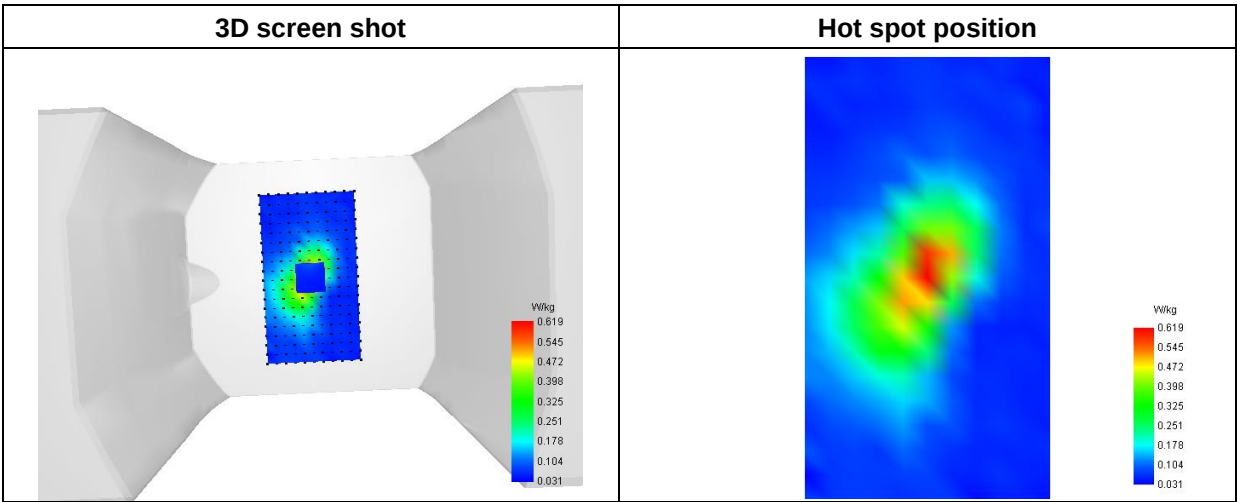

MEASUREMENT 32

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                 |
|-----------------|---------------------------------|
| Area Scan       | dx=8mm dy=8mm                   |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm            |
| Phantom         | Flat Plane                      |
| Device Position | Back                            |
| Band            | WiFi(5.6GHz)_802.11n(HT40)_ANT1 |
| Channels        | Low                             |
| Signal          | Duty Cycle: 1:1                 |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5510.000000 |
| Relative Permittivity (real part) | 47.341254   |
| Conductivity (S/m)                | 5.720512    |
| Power Variation (%)               | 0.848732    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

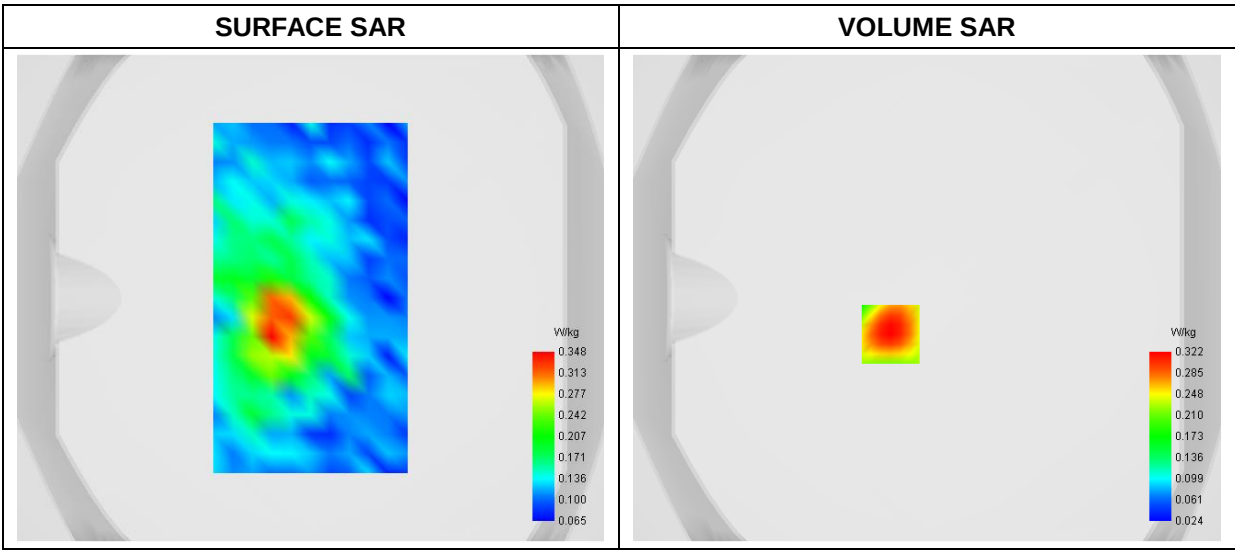


Maximum location: X=-15.00, Y=-15.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.134617 |
| SAR 1g (W/Kg)  | 0.228311 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.5017 | 0.3223 | 0.2049 | 0.1336 | 0.0947 | 0.0754 | 0.0681 | 0.0688 | 0.0747 |

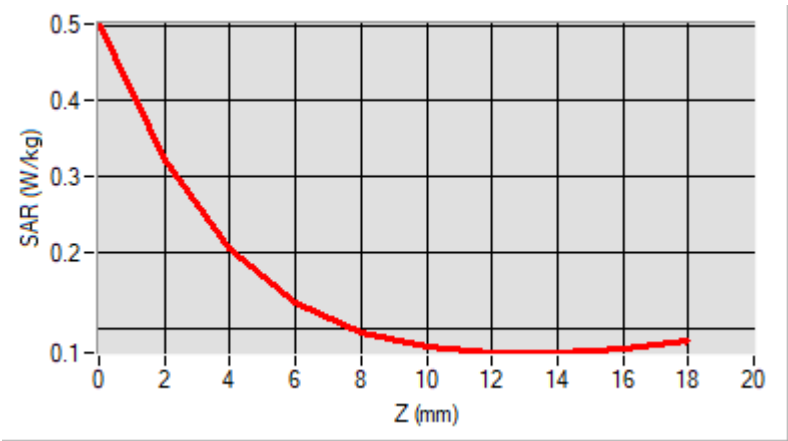

F. 3D Image

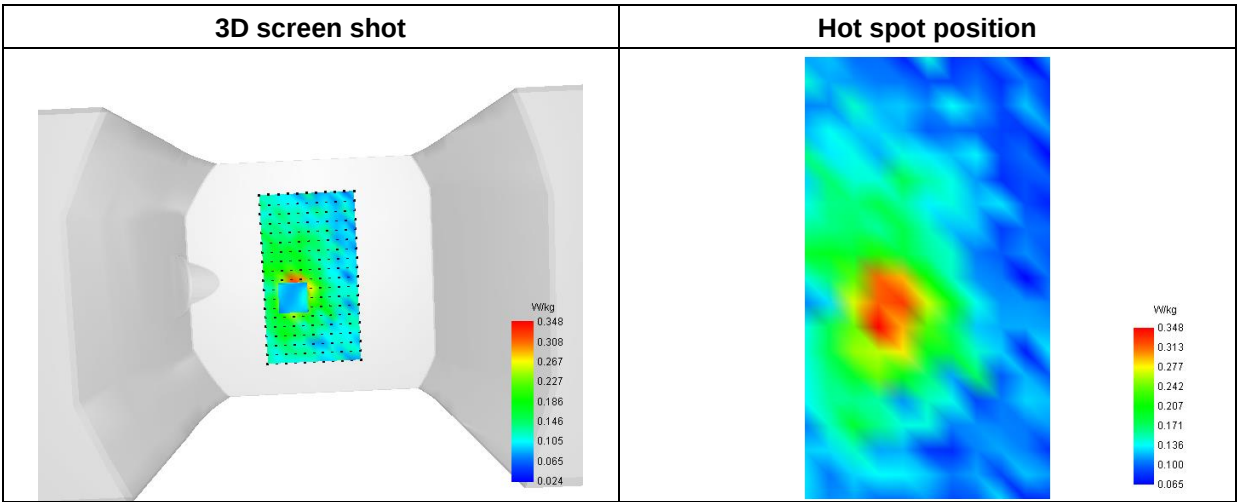

MEASUREMENT 33

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                             |
|-----------------|-----------------------------|
| Area Scan       | dx=8mm dy=8mm               |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm        |
| Phantom         | Flat Plane                  |
| Device Position | Back                        |
| Band            | WiFi(5.8GHz)_ 802.11a –ANT1 |
| Channels        | High                        |
| Signal          | Duty Cycle: 1:1             |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5825.000000 |
| Relative Permittivity (real part) | 49.922839   |
| Conductivity (S/m)                | 5.911254    |
| Power Variation (%)               | 5.210512    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

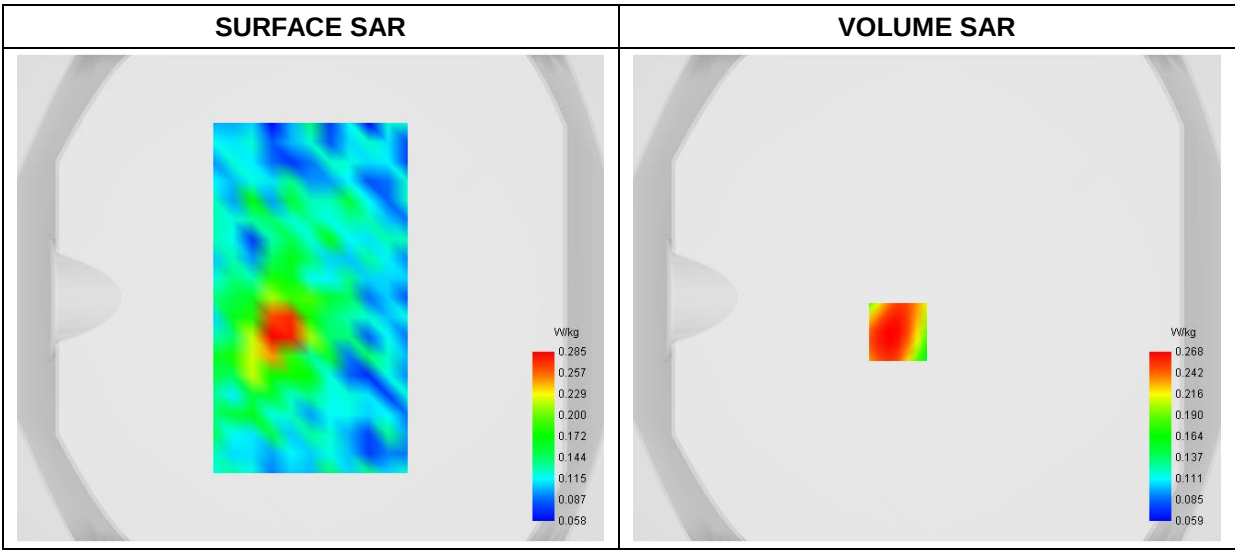


Maximum location: X=-12.00, Y=-14.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.141809 |
| SAR 1g (W/Kg)  | 0.216804 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.3581 | 0.2678 | 0.1975 | 0.1627 | 0.1399 | 0.1187 | 0.1210 | 0.1056 | 0.1210 |

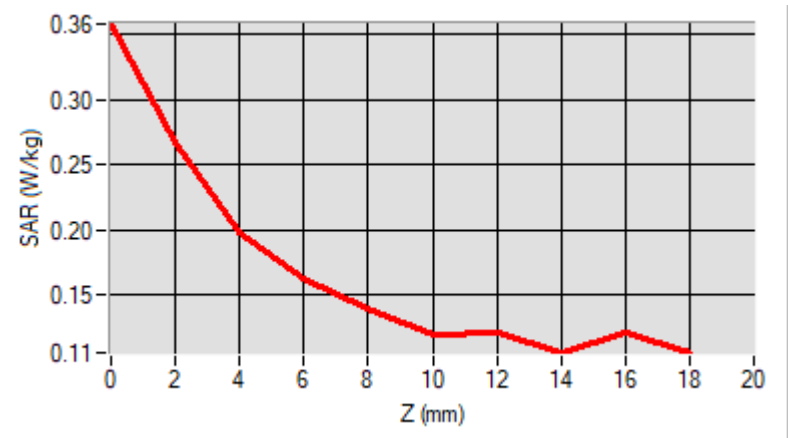

F. 3D Image

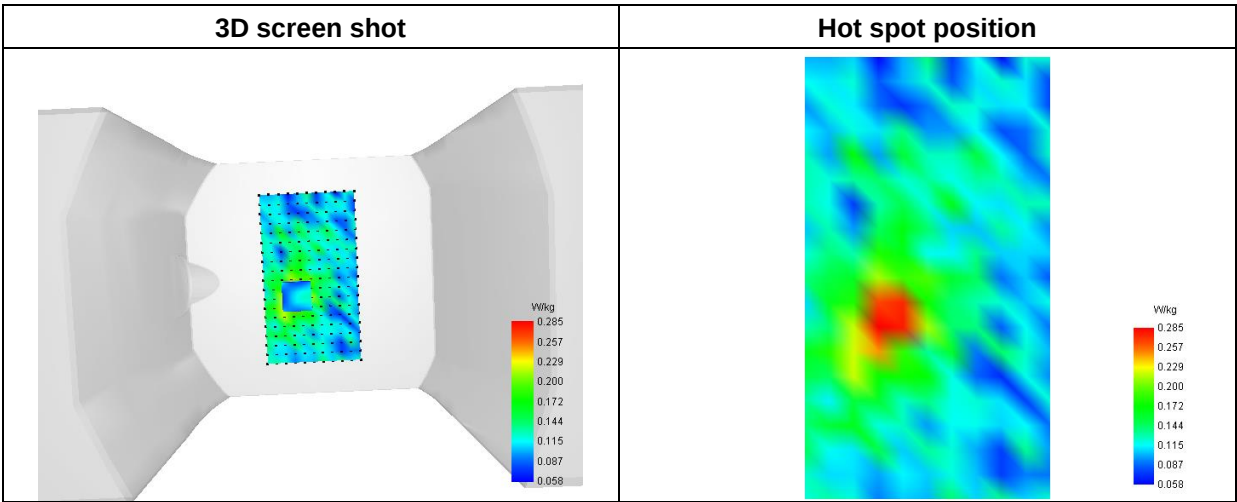

MEASUREMENT 34

Type: Phone measurement (Complete)  
Date of measurement: 2023-02-15  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back                 |
| Band            | WiFi_802.11b-ANT2    |
| Channels        | High                 |
| Signal          | Duty Cycle: 1:1      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2462.000000 |
| Relative Permittivity (real part) | 53.581212   |
| Conductivity (S/m)                | 1.931202    |
| Power Variation (%)               | 0.568374    |
| Ambient Temperature               | 23.5        |
| Liquid Temperature                | 23.5        |

C. SAR Surface and Volume

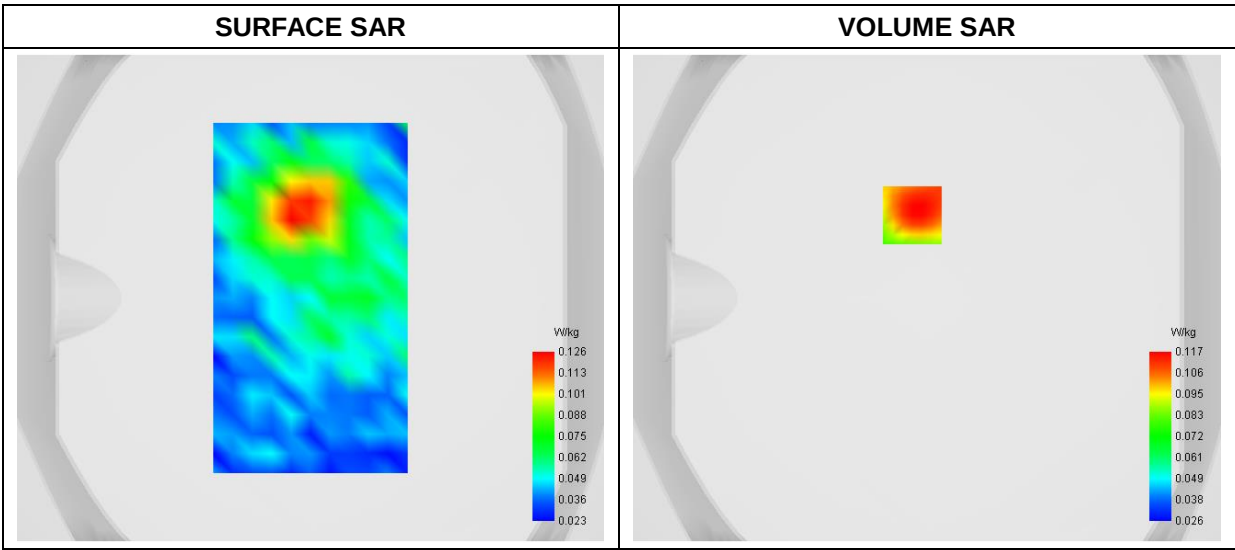


Maximum location: X=-6.00, Y=34.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.074998 |
| SAR 1g (W/Kg)  | 0.118601 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.2001 | 0.1174 | 0.0912 | 0.0866 | 0.0688 | 0.0641 | 0.0511 | 0.0473 | 0.0381 |

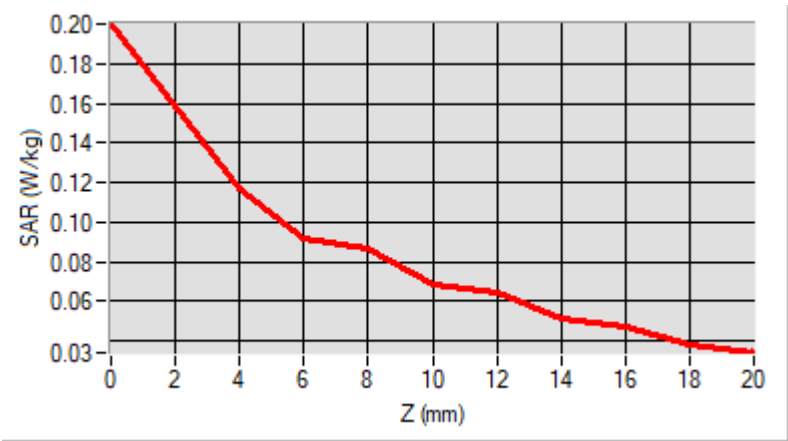

F. 3D Image

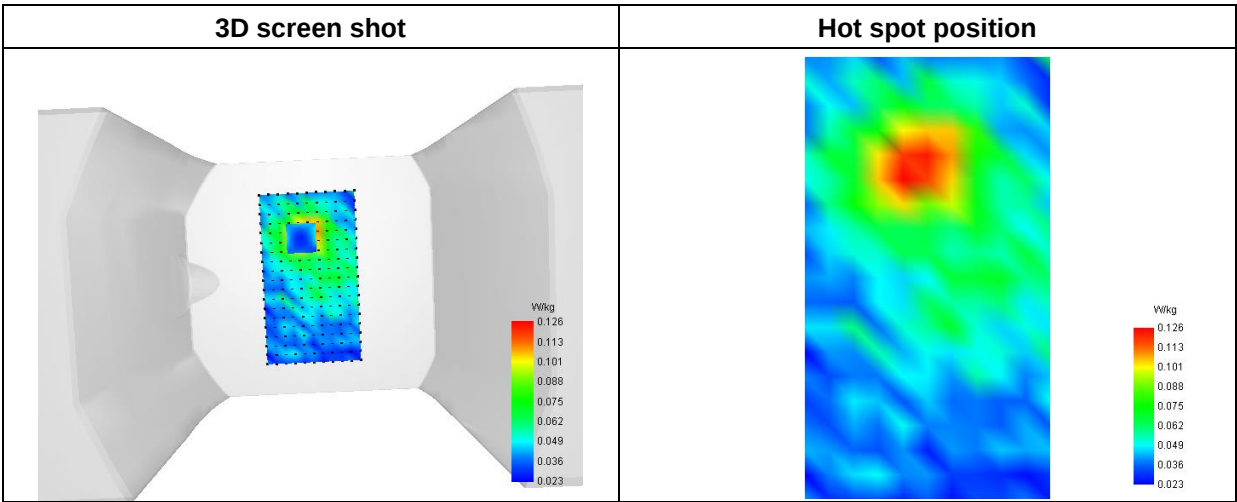

MEASUREMENT 35

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm      |
| Phantom         | Flat Plane                |
| Device Position | Back                      |
| Band            | WLAN(5.2GHz)_802.11a-ANT2 |
| Channels        | Low                       |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5200.000000 |
| Relative Permittivity (real part) | 47.112911   |
| Conductivity (S/m)                | 5.431483    |
| Power Variation (%)               | -1.660000   |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

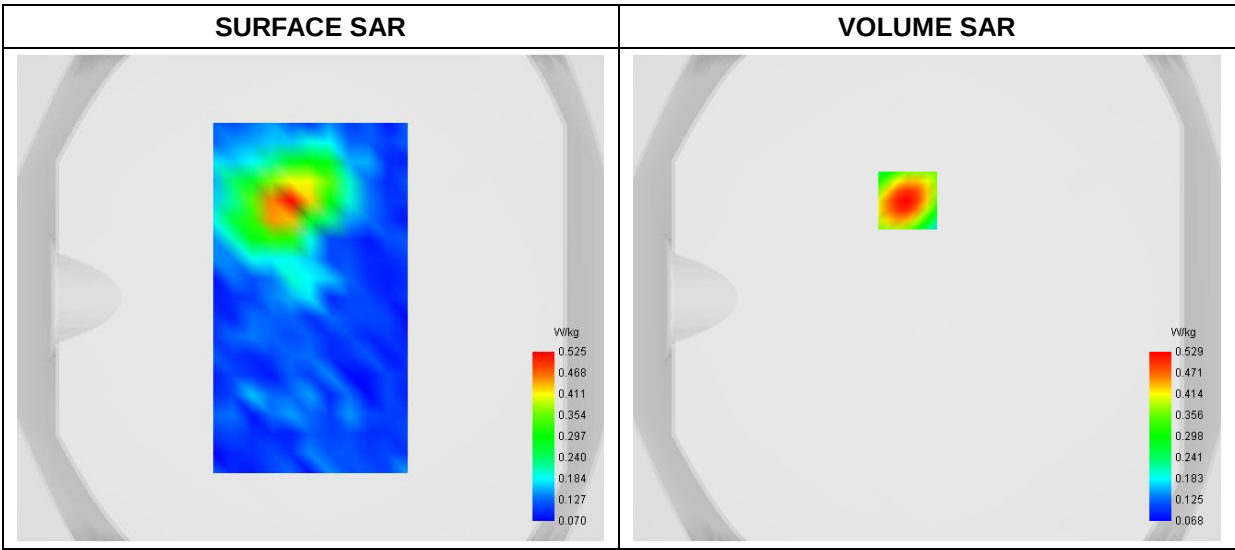


Maximum location: X=-8.00, Y=40.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.178822 |
| SAR 1g (W/Kg)  | 0.343274 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.8277 | 0.5288 | 0.3324 | 0.2115 | 0.1437 | 0.1077 | 0.0908 | 0.0854 | 0.0872 |

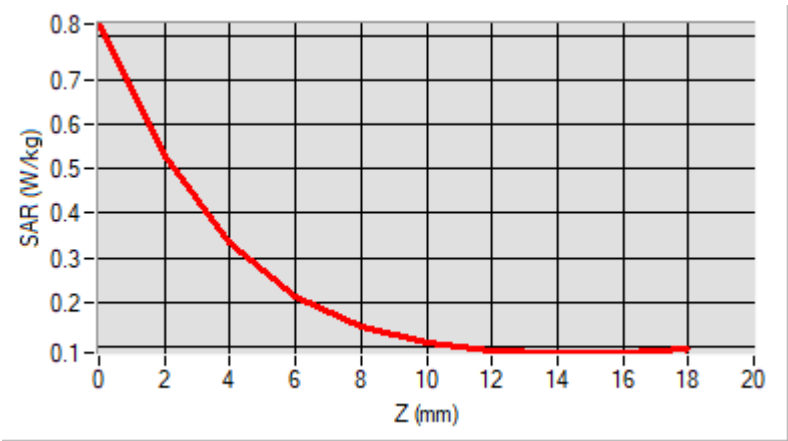

F. 3D Image

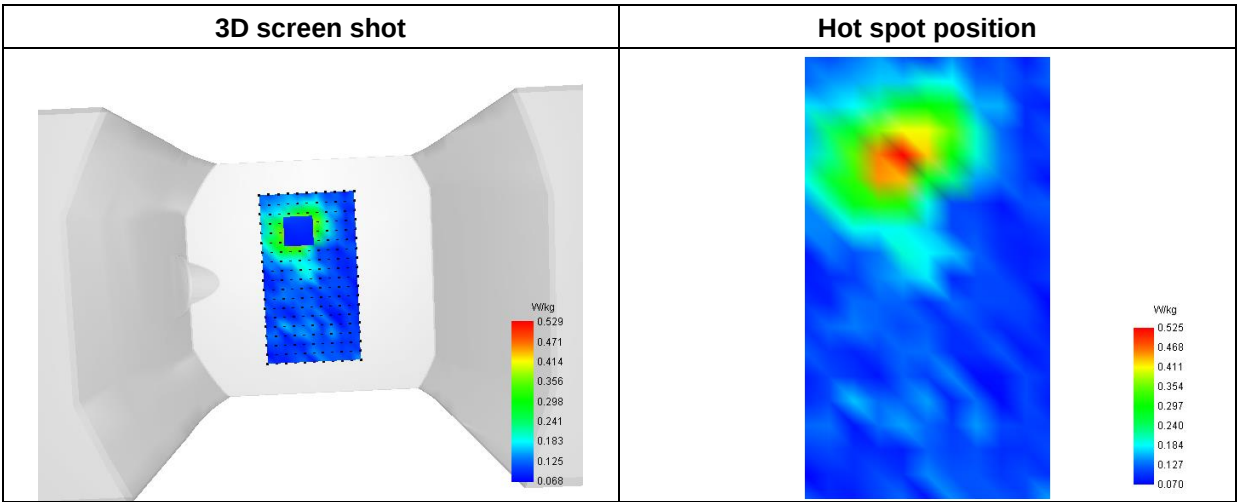

MEASUREMENT 36

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                           |
|-----------------|---------------------------|
| Area Scan       | dx=8mm dy=8mm             |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm      |
| Phantom         | Flat Plane                |
| Device Position | Back                      |
| Band            | WLAN(5.3GHz)_802.11a-ANT2 |
| Channels        | High                      |
| Signal          | Duty Cycle: 1:1           |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5320.000000 |
| Relative Permittivity (real part) | 46.913248   |
| Conductivity (S/m)                | 5.642715    |
| Power Variation (%)               | 0.950000    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

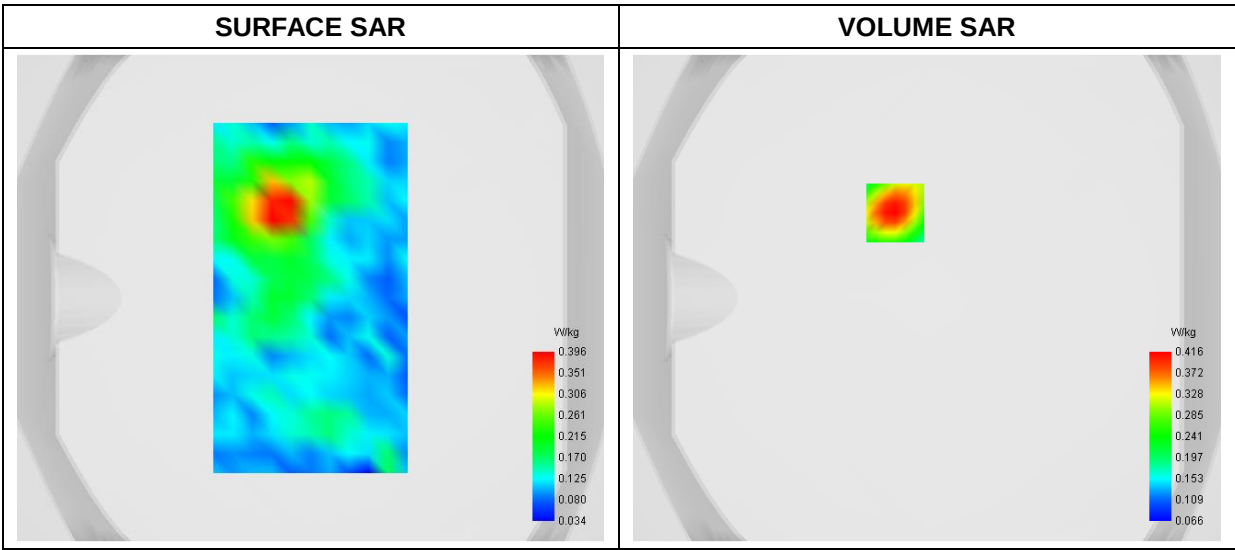


Maximum location: X=-13.00, Y=35.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.153187 |
| SAR 1g (W/Kg)  | 0.270900 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.6334 | 0.4158 | 0.2710 | 0.1800 | 0.1277 | 0.0993 | 0.0856 | 0.0811 | 0.0822 |

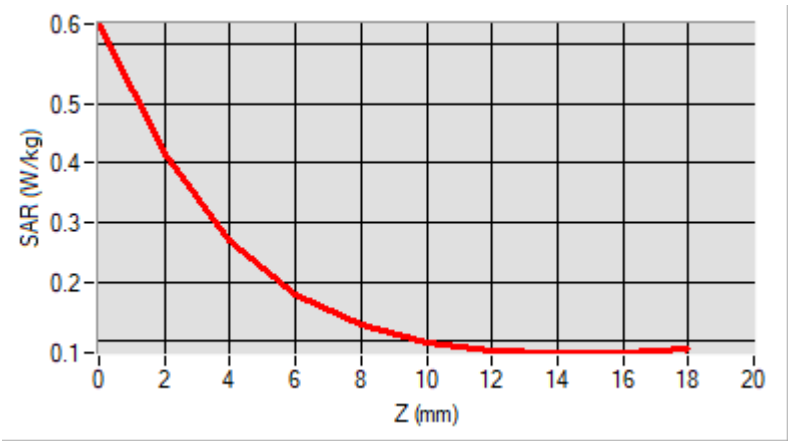

F. 3D Image

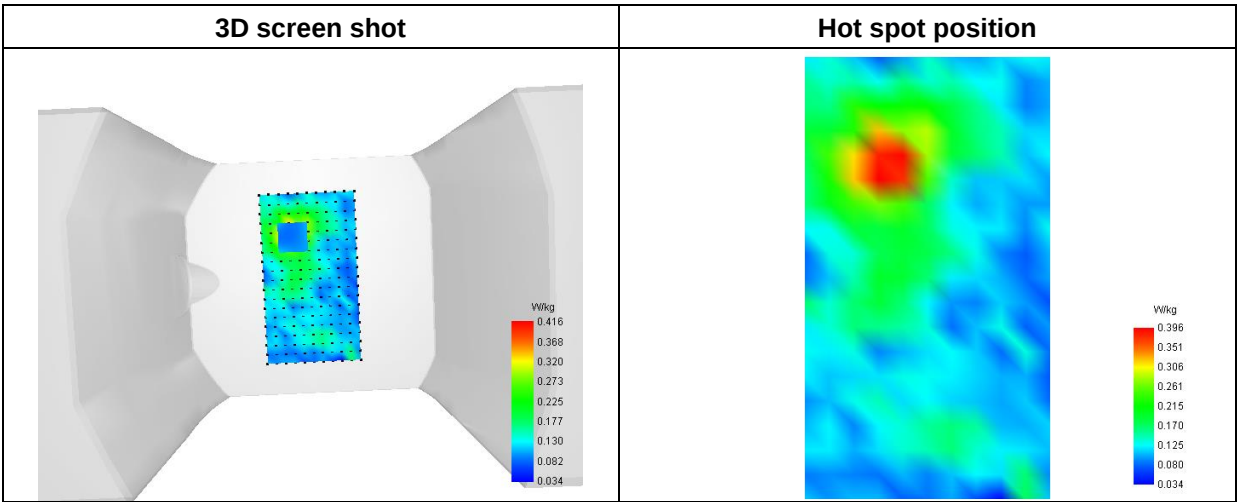

MEASUREMENT 37

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                                   |
|-----------------|-----------------------------------|
| Area Scan       | dx=8mm dy=8mm                     |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm              |
| Phantom         | Flat Plane                        |
| Device Position | Back                              |
| Band            | WLAN(5.6GHz)_ 802.11n (HT40)-ANT2 |
| Channels        | High                              |
| Signal          | Duty Cycle: 1:1                   |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5670.000000 |
| Relative Permittivity (real part) | 47.322911   |
| Conductivity (S/m)                | 5.724268    |
| Power Variation (%)               | -1.660000   |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

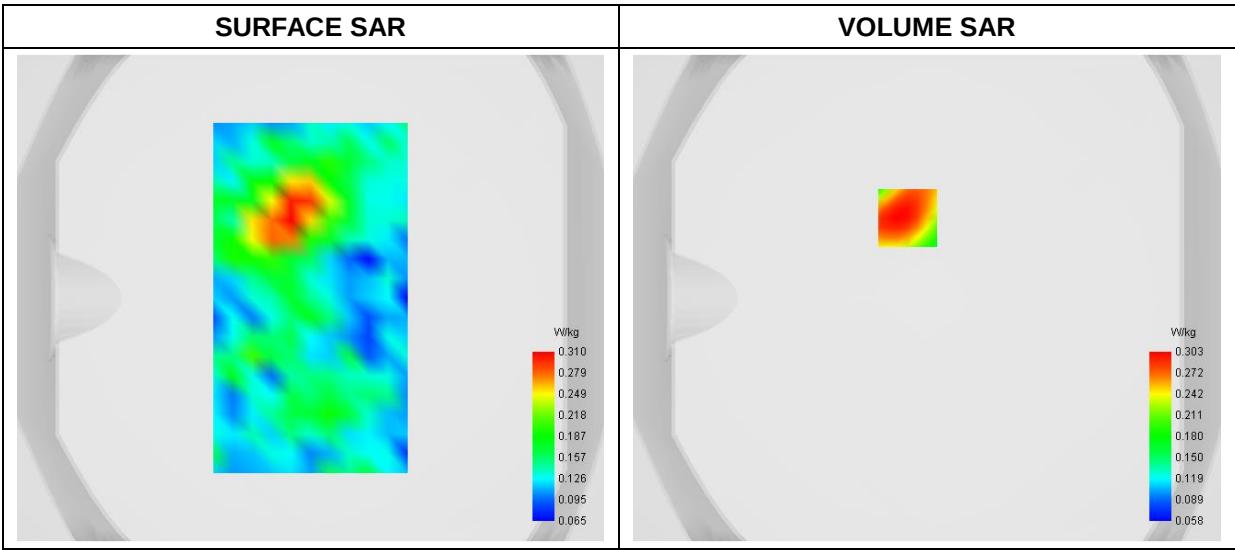


Maximum location: X=-8.00, Y=33.00

D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.143763 |
| SAR 1g (W/Kg)  | 0.224525 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.4639 | 0.3029 | 0.1947 | 0.1390 | 0.1080 | 0.0859 | 0.0853 | 0.0797 | 0.0907 |

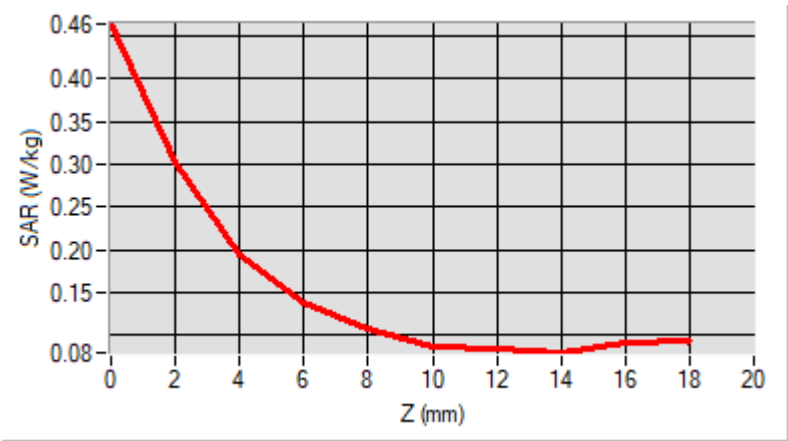

F. 3D Image

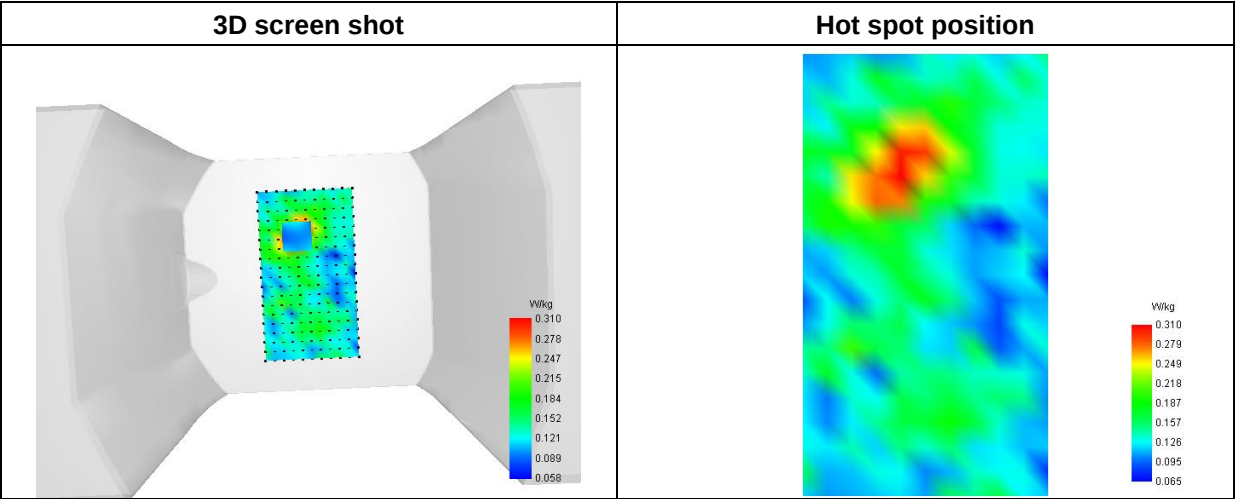

MEASUREMENT 38

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                          |
|-----------------|--------------------------|
| Area Scan       | dx=8mm dy=8mm            |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm     |
| Phantom         | Flat Plane               |
| Device Position | Front                    |
| Band            | SRD(5.8GHz)_802.11a-ANT2 |
| Channels        | Low                      |
| Signal          | Duty Cycle: 1:1          |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 5745.000000 |
| Relative Permittivity (real part) | 49.933247   |
| Conductivity (S/m)                | 5.902715    |
| Power Variation (%)               | 0.950000    |
| Ambient Temperature               | 22.3        |
| Liquid Temperature                | 22.3        |

C. SAR Surface and Volume

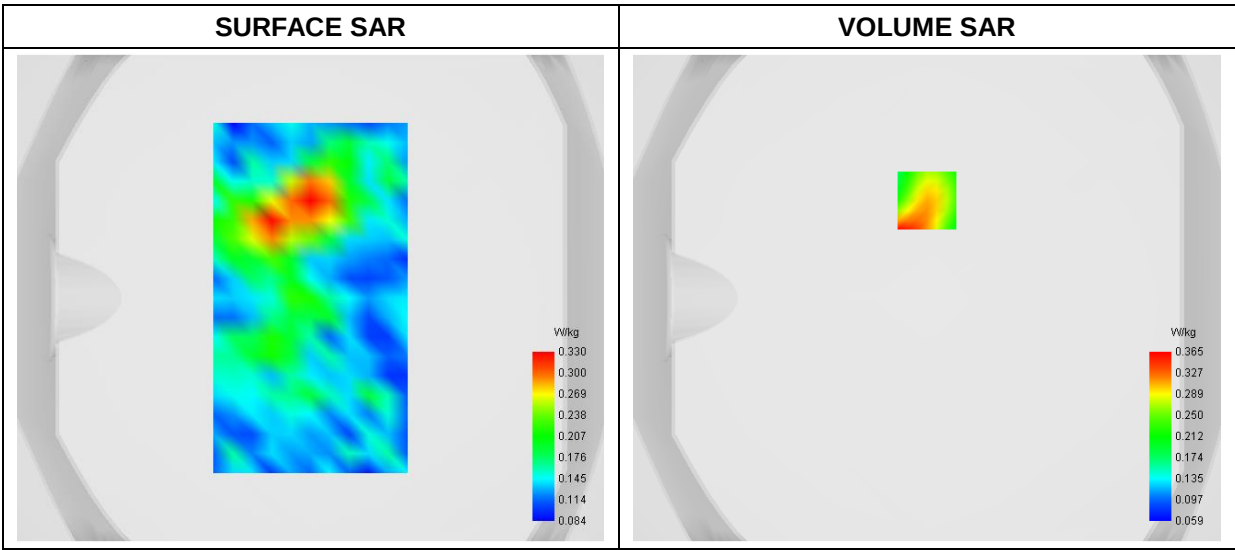


Maximum location: X=0.00, Y=40.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.155208 |
| SAR 1g (W/Kg)  | 0.234330 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 2.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  |
| SAR (W/Kg) | 0.6503 | 0.3652 | 0.1814 | 0.1816 | 0.1371 | 0.1150 | 0.1192 | 0.1001 | 0.0951 |

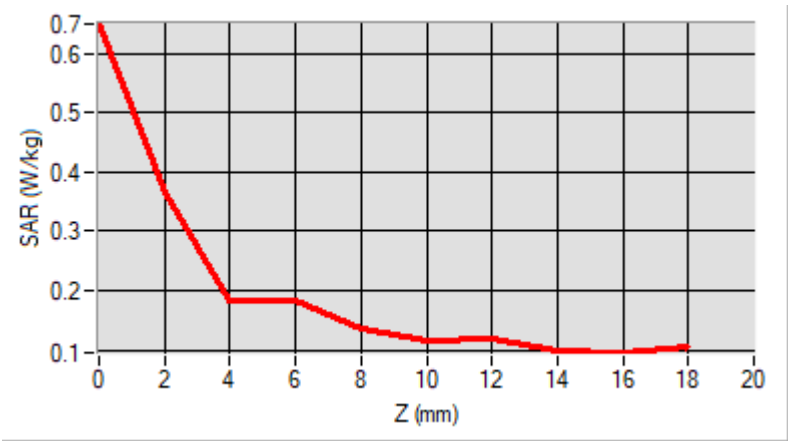

F. 3D Image

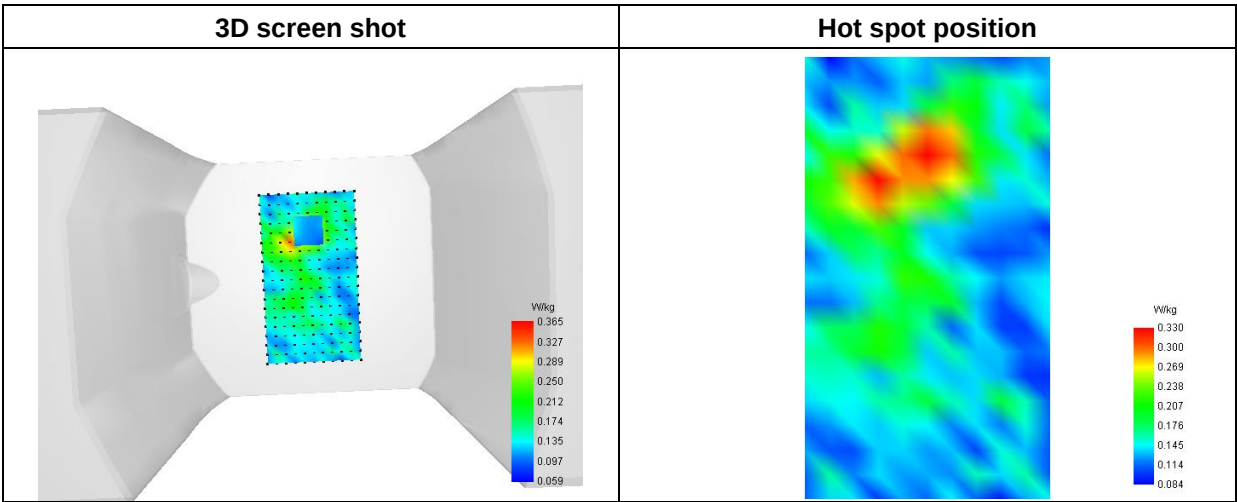

MEASUREMENT 39

Type: Phone measurement (Complete)  
Date of measurement: 2023-03-04  
Measurement duration: 12 minutes 3 seconds


A. Experimental conditions

|                 |                      |
|-----------------|----------------------|
| Area Scan       | dx=8mm dy=8mm        |
| Zoom Scan       | dx=4mm dy=4mm dz=2mm |
| Phantom         | Flat Plane           |
| Device Position | Back                 |
| Band            | Bluetooth            |
| Channels        | Low                  |
| Signal          | Duty Cycle: 1:1      |

B. SAR Measurement Results

|                                   |             |
|-----------------------------------|-------------|
| Frequency (MHz)                   | 2480.000000 |
| Relative Permittivity (real part) | 53.582208   |
| Conductivity (S/m)                | 1.934330    |
| Power Variation (%)               | 1.5174000   |
| Ambient Temperature               | 23.5        |
| Liquid Temperature                | 23.5        |

C. SAR Surface and Volume

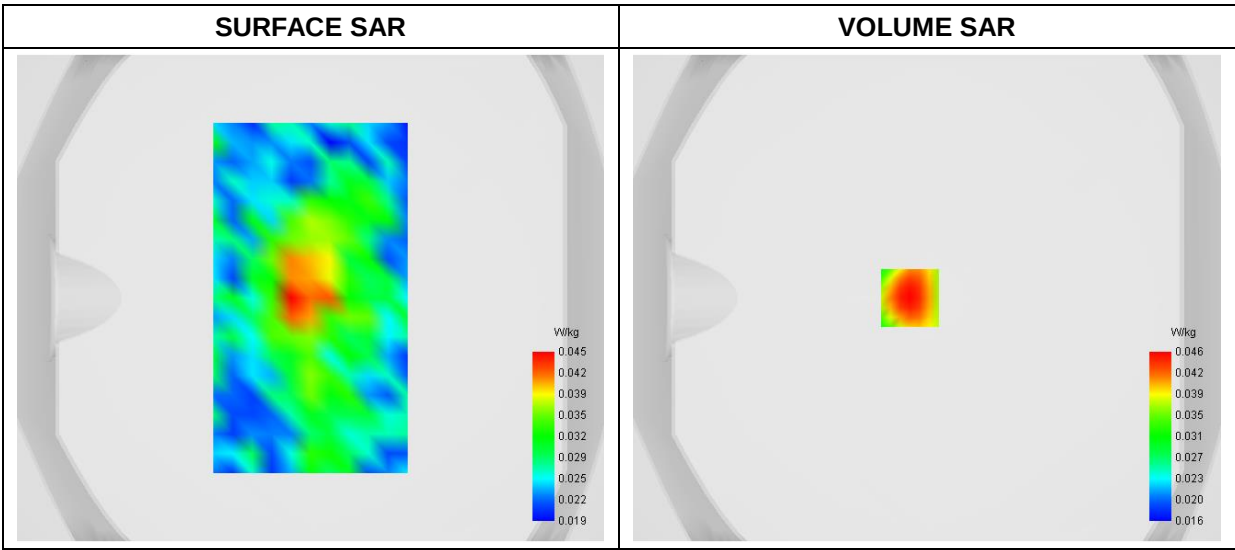


Maximum location: X=-7.00, Y=0.00  
D. SAR 1g & 10g


|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.031462 |
| SAR 1g (W/Kg)  | 0.046582 |

E. Z Axis Scan

|            |        |        |        |        |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Z (mm)     | 0.00   | 4.00   | 6.00   | 8.00   | 10.00  | 12.00  | 14.00  | 16.00  | 18.00  |
| SAR (W/Kg) | 0.0874 | 0.0462 | 0.0344 | 0.0268 | 0.0224 | 0.0203 | 0.0197 | 0.0203 | 0.0216 |

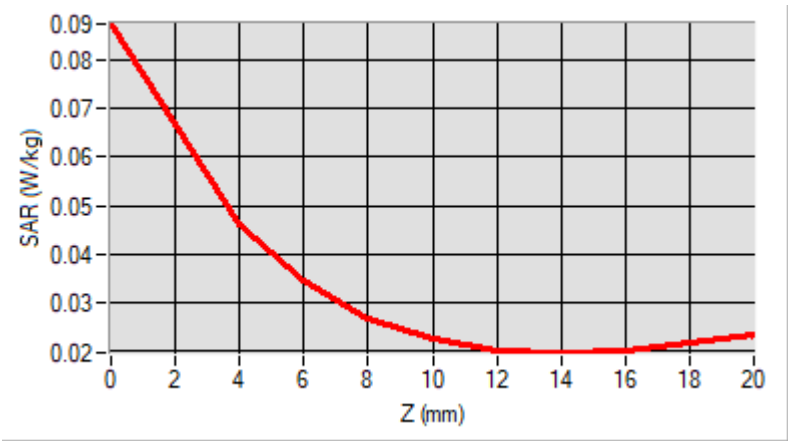


F. 3D Image

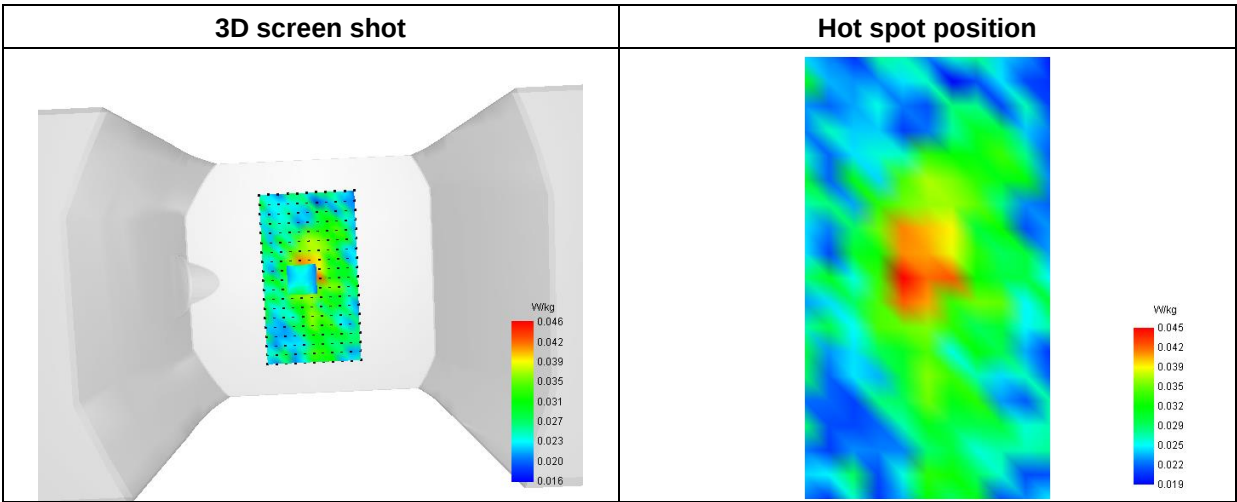


## Annex C. EUT Photos

---


### EUT View 1

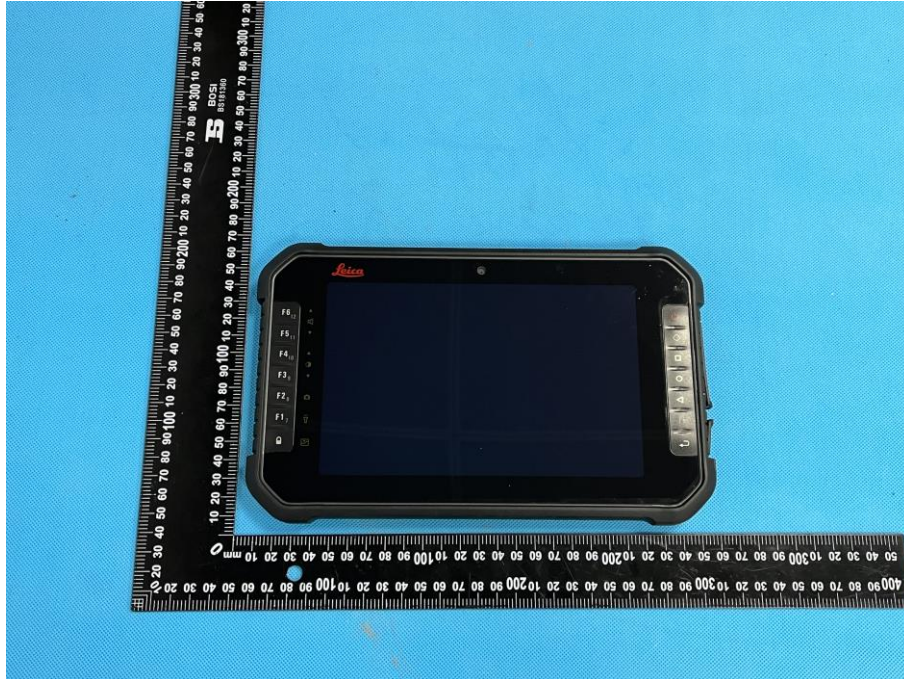

### EUT View 2

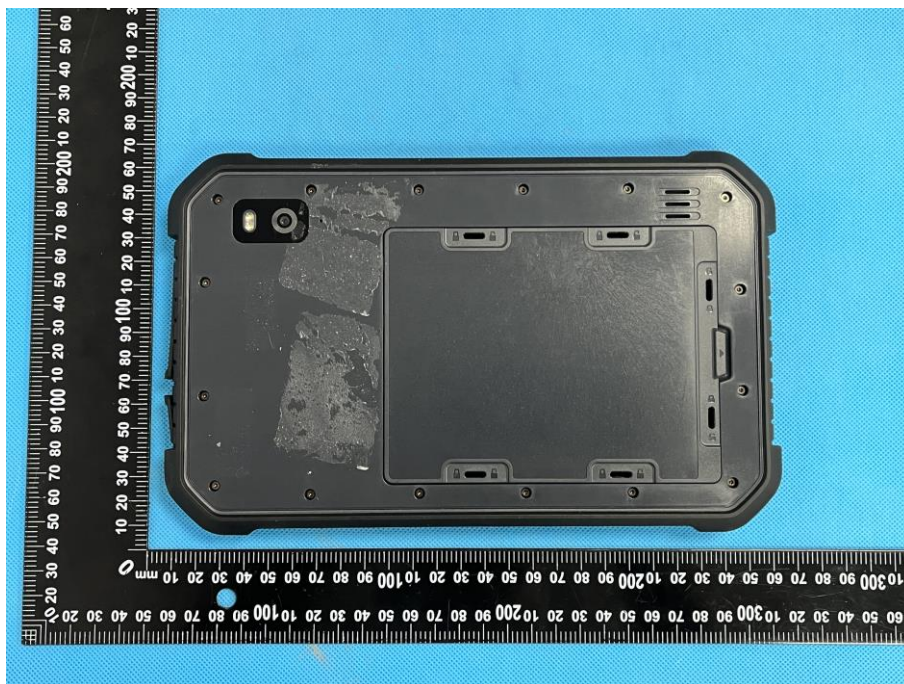

Antenna View

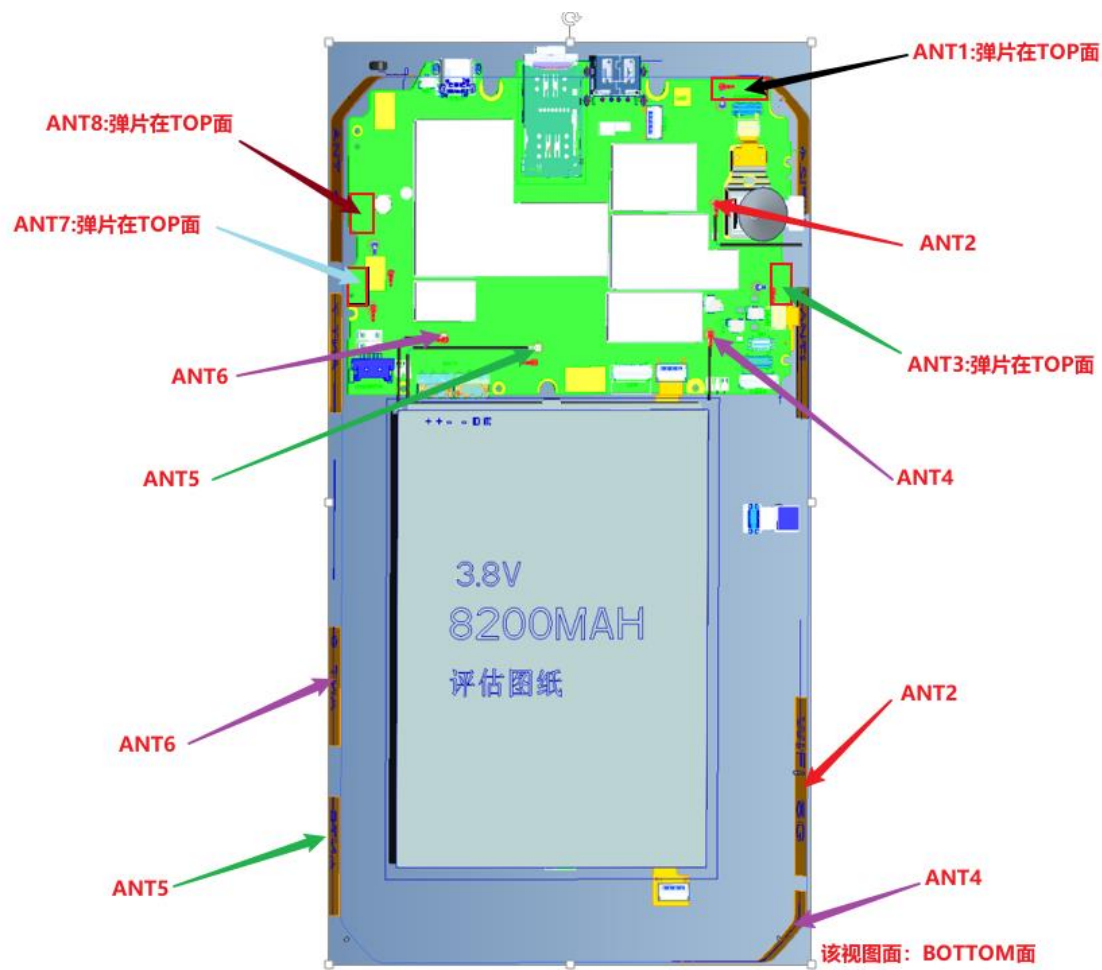

## Annex D. Test Setup Photos

---


### Body mode Exposure Conditions

Test distance: 0mm


**Body Front**



**Body Back**

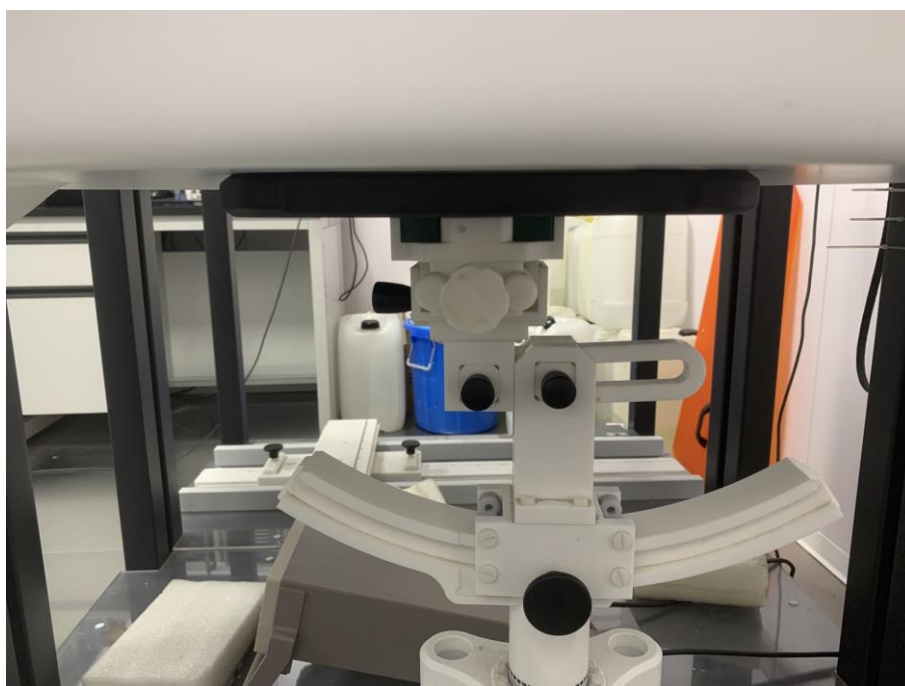

**Body Right**

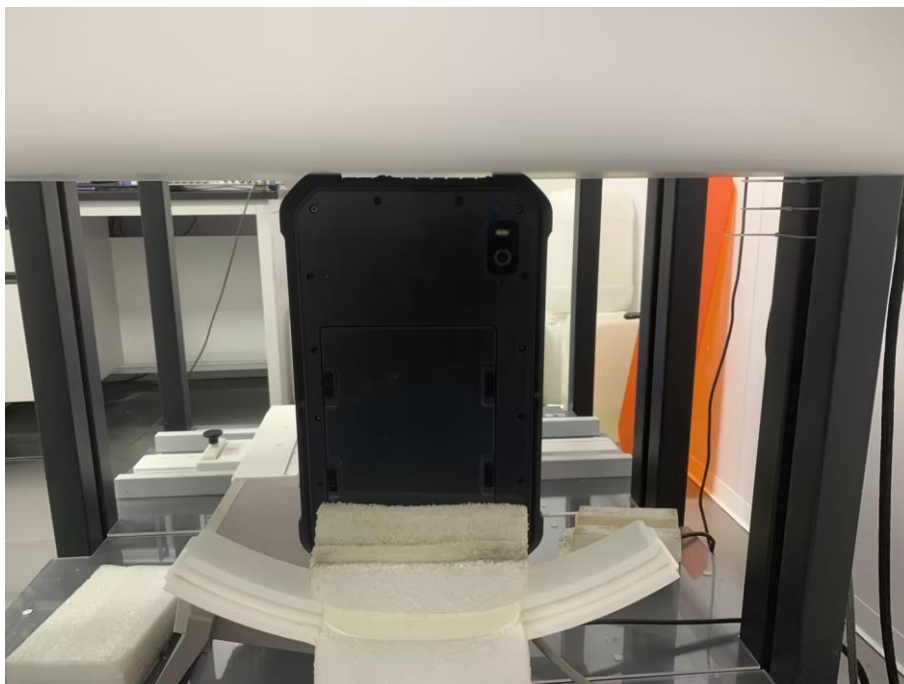

**Body Left**



**Body Top**



**Body Bottom**



## Annex E. Calibration Certificate

---

*Please refer to the exhibit for the calibration certificate*

\*\*\*\*\* END OF REPORT \*\*\*\*\*