


1. Bandwidth



1.1 OBW

1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.868	Pass
		2441	DH5	1	0.865	Pass
		2480	DH5	1	0.868	Pass

1.1.2 Test Graph

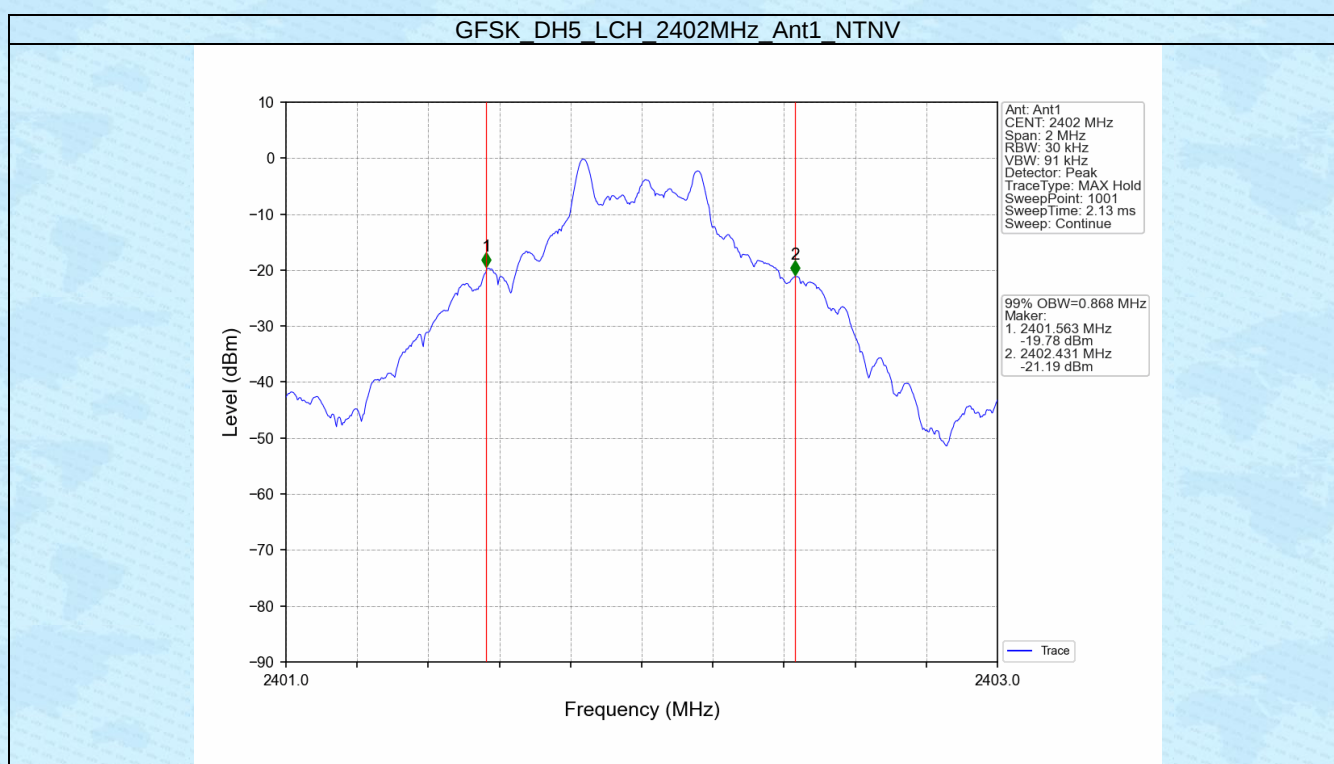

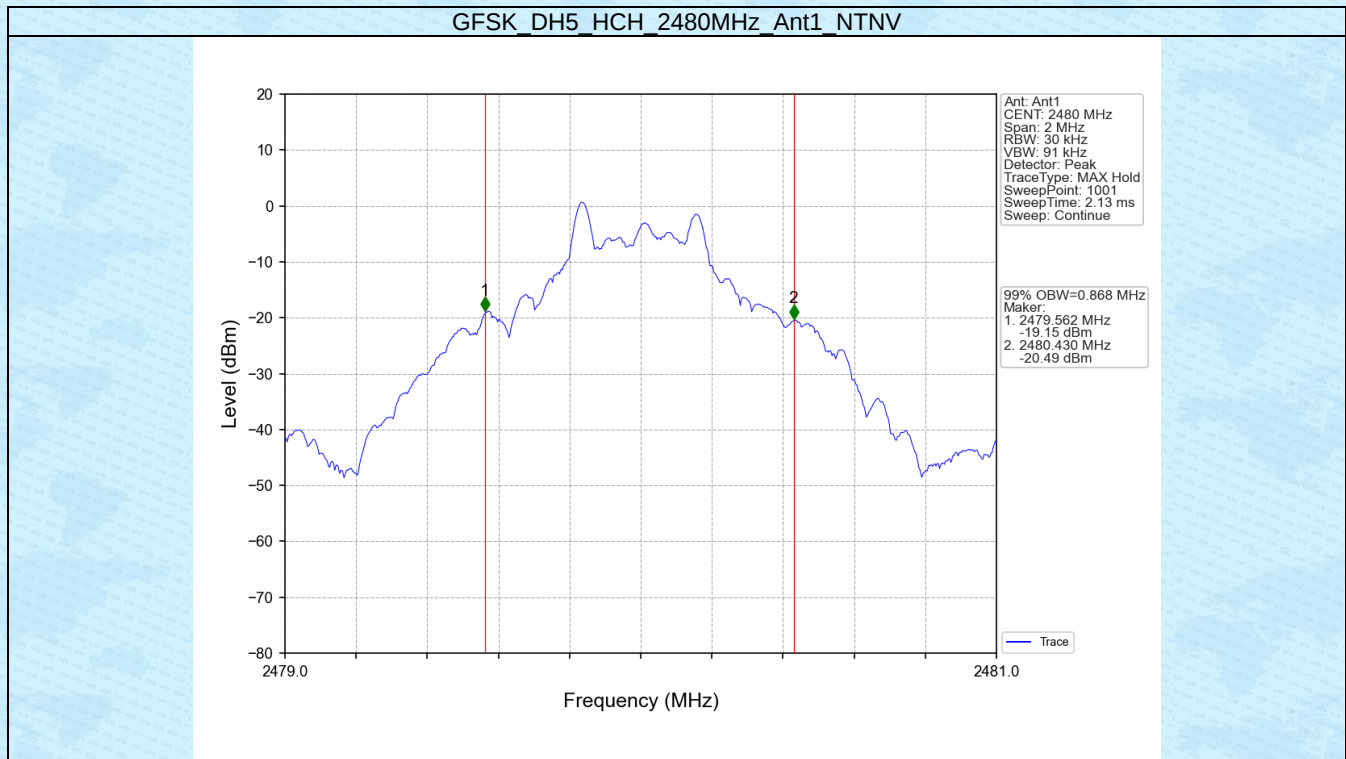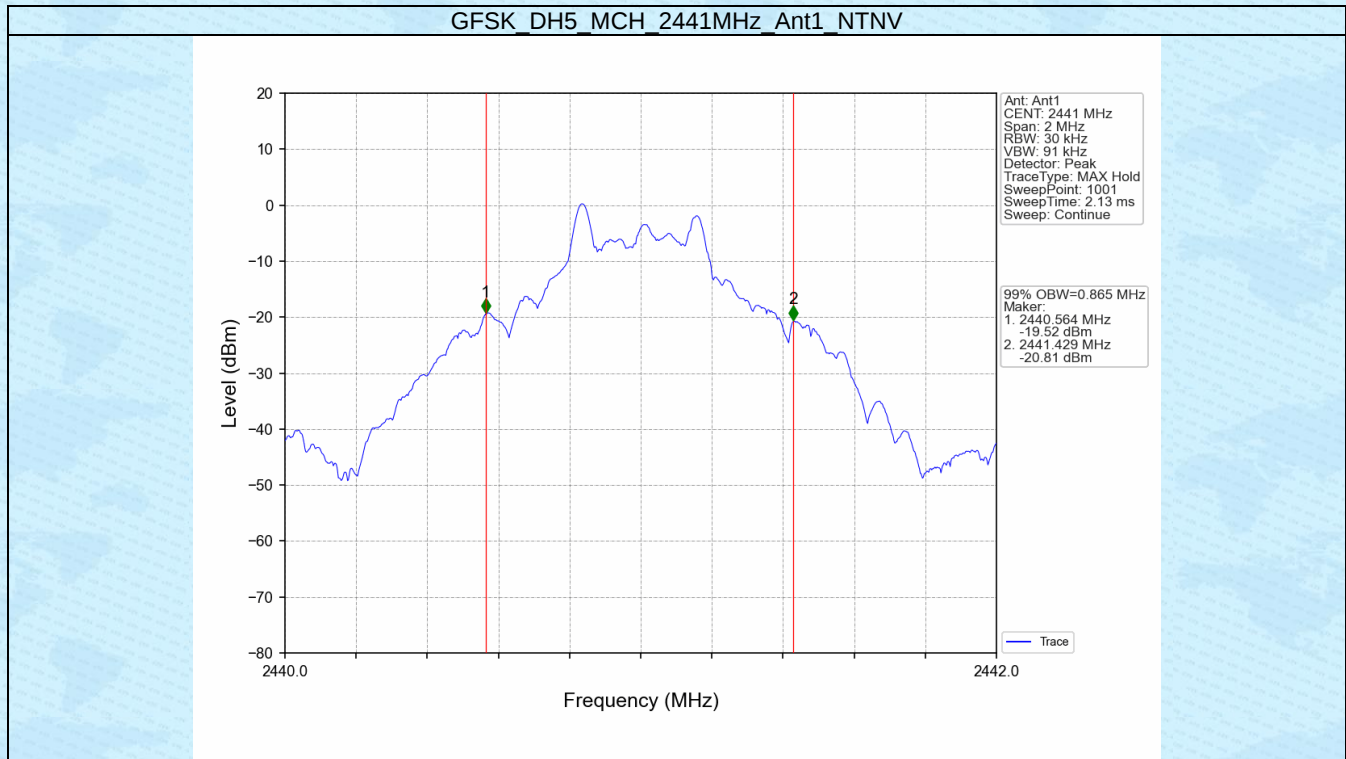




1.2 20dB BW

1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.821	Pass
		2441	DH5	1	0.824	Pass
		2480	DH5	1	0.819	Pass

1.2.2 Test Graph

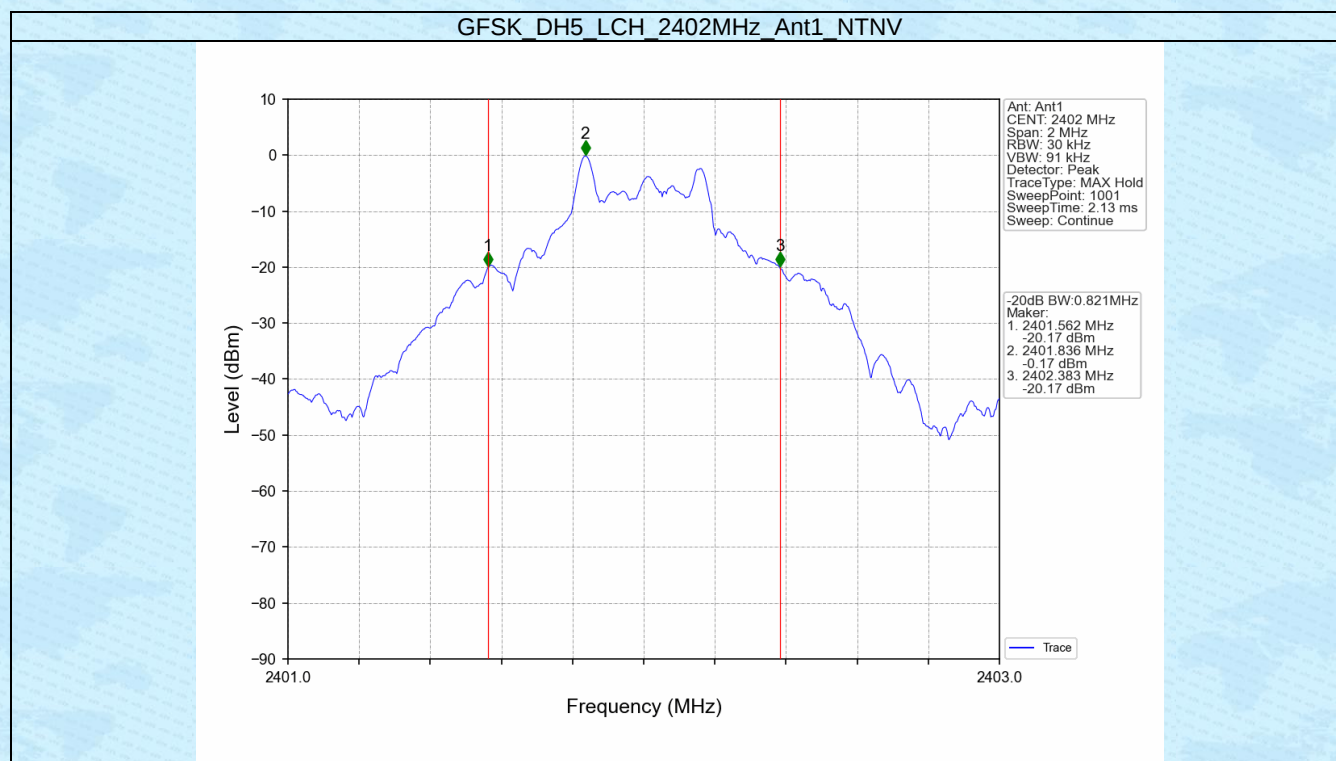

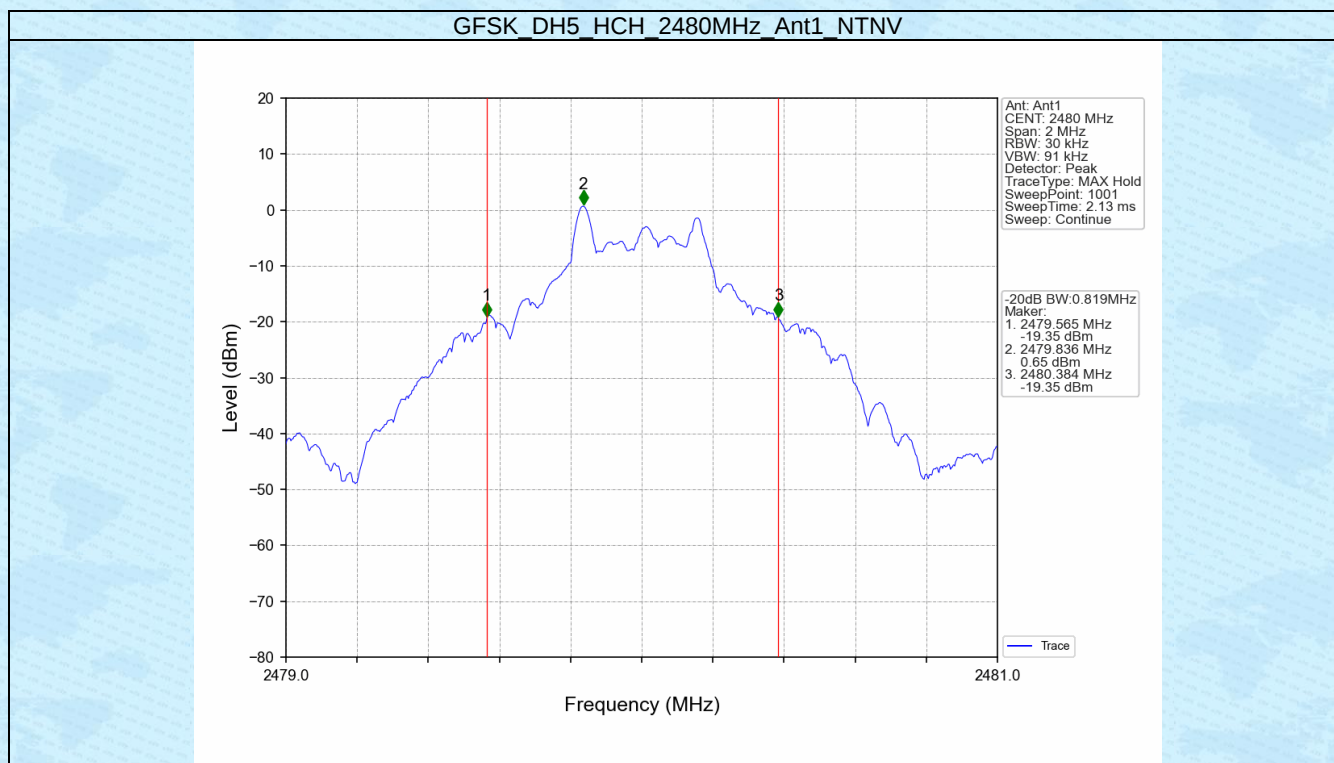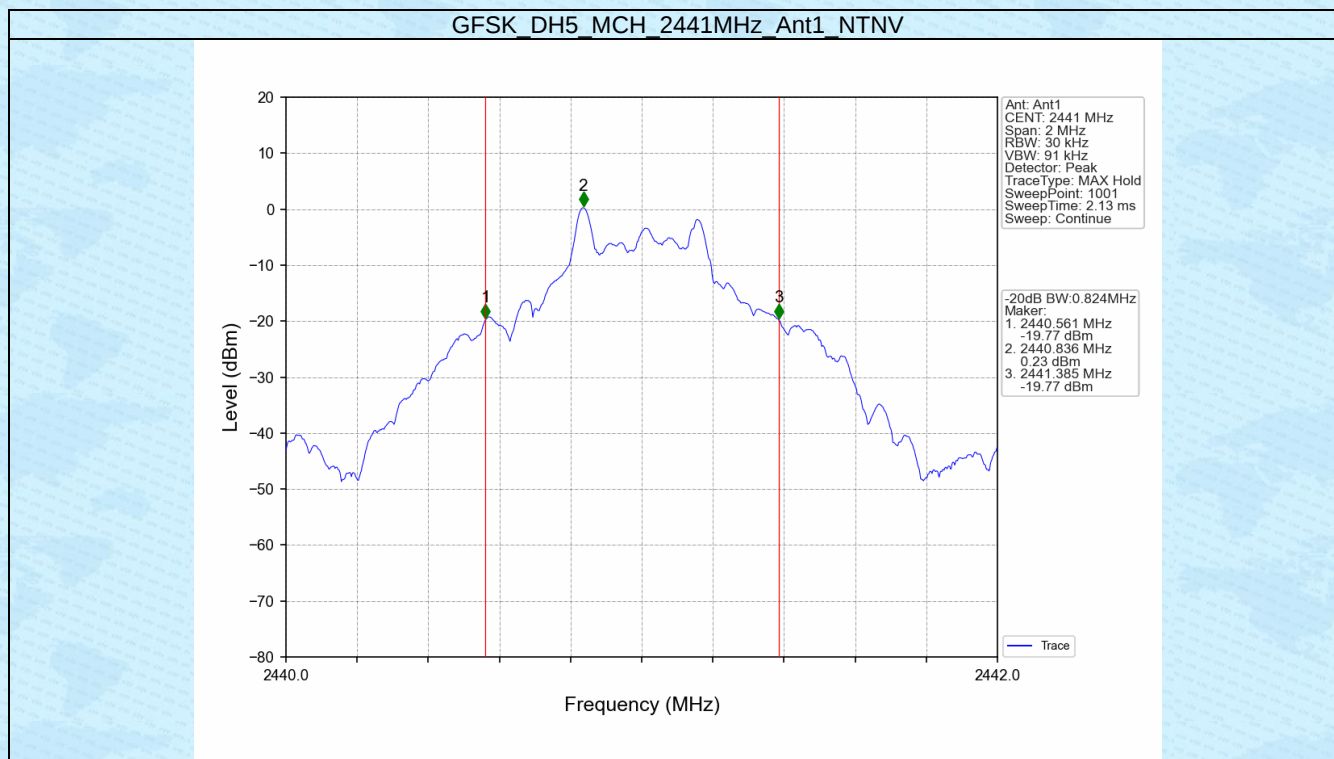

2. Maximum Conducted Output Power


2.1 Power


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	0.05	<=30	Pass
		2441	DH5	0.47	<=30	Pass
		2480	DH5	0.88	<=30	Pass

Note1: Antenna Gain: Ant1:3.00dBi;

2.1.2 Test Graph

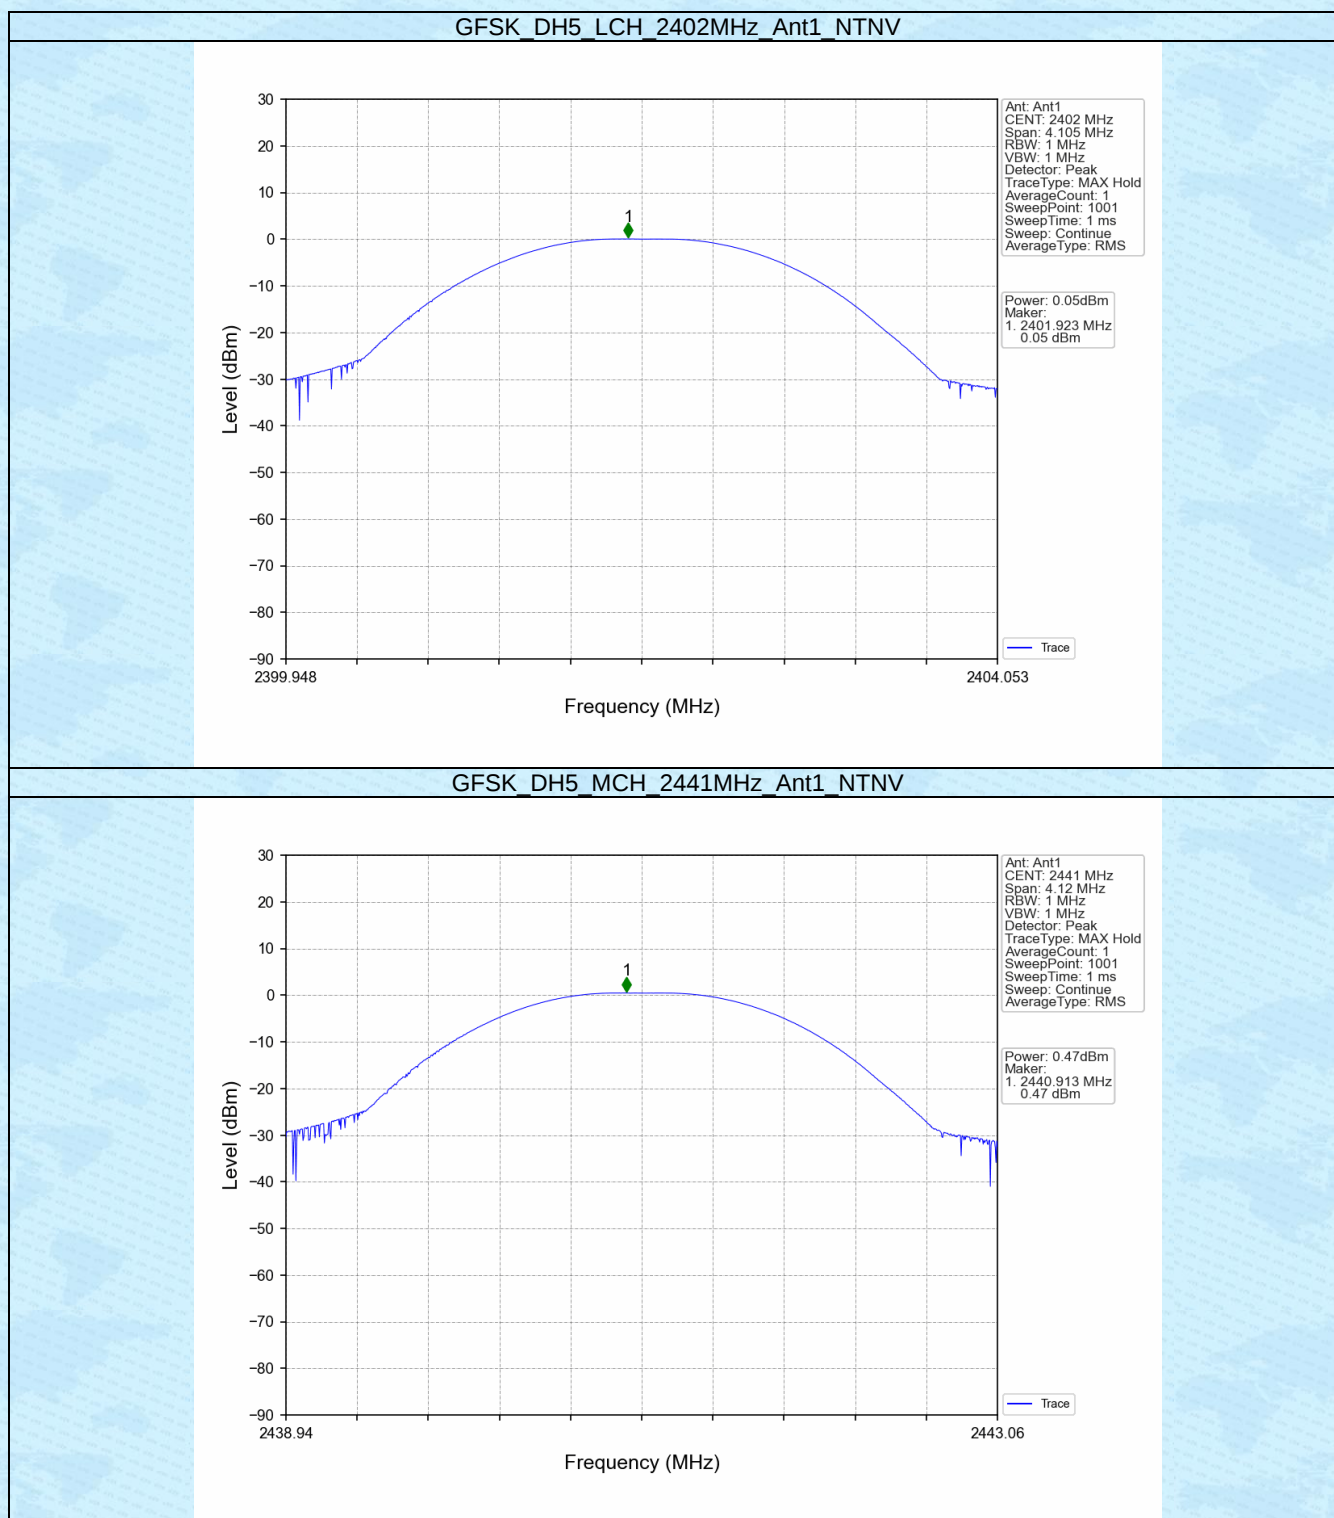

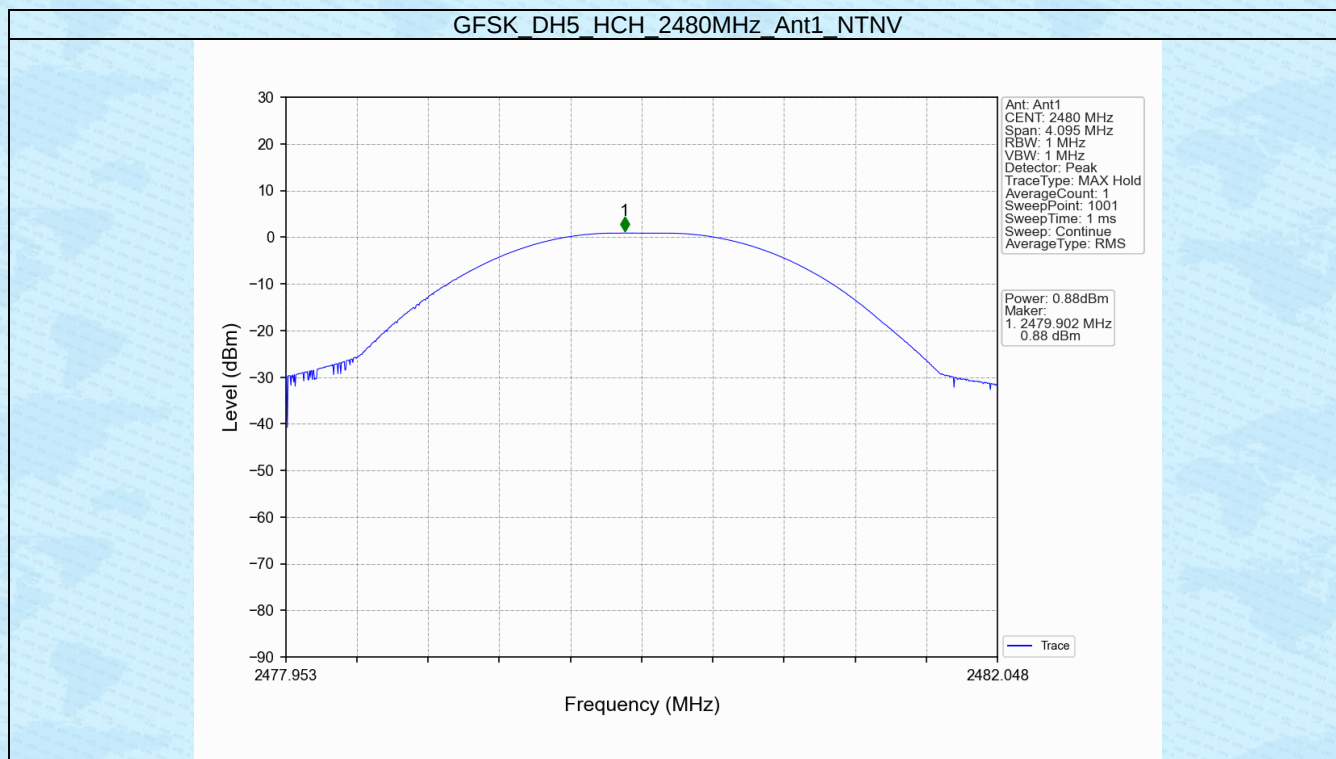


3. Carrier Frequency Separation

3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.994	0.824	≥ 0.824	Pass

3.1.2 Test Graph

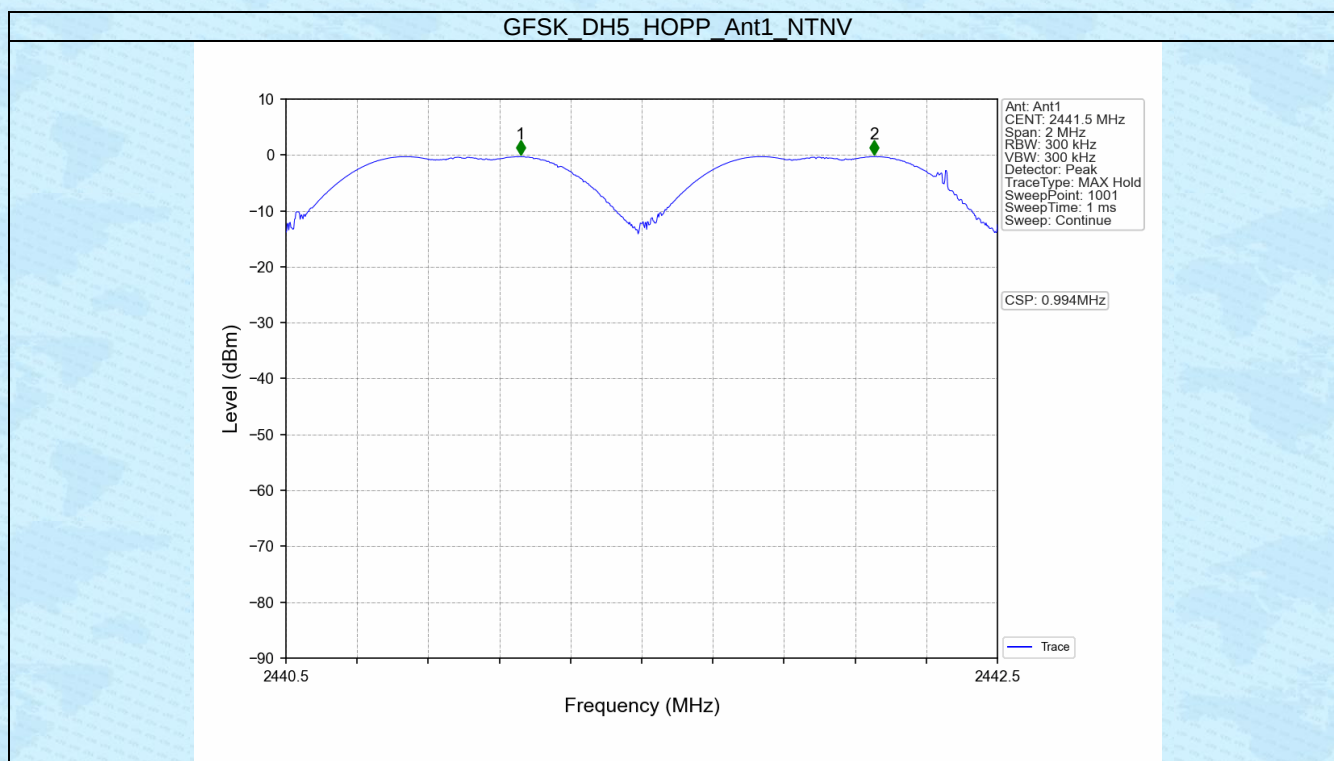


4. Number of Hopping Frequencies

4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass

4.1.2 Test Graph

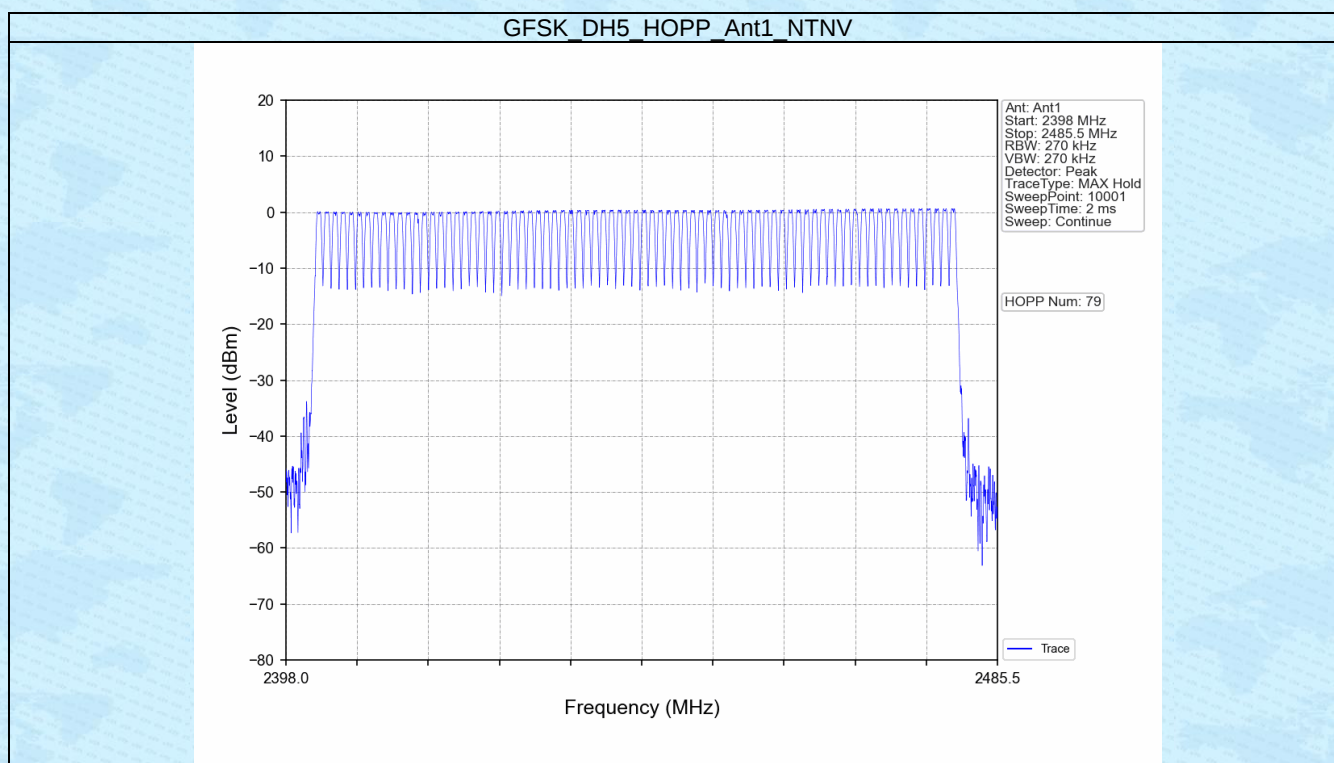


5. Time of Occupancy (Dwell Time)


5.1 Ant1

5.1.1 Test Result


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	320	122.240	<=400	Pass
			DH3	1.638	31.600	161	263.718	<=400	Pass
			DH5	2.888	31.600	106	306.128	<=400	Pass

5.1.2 Test Graph

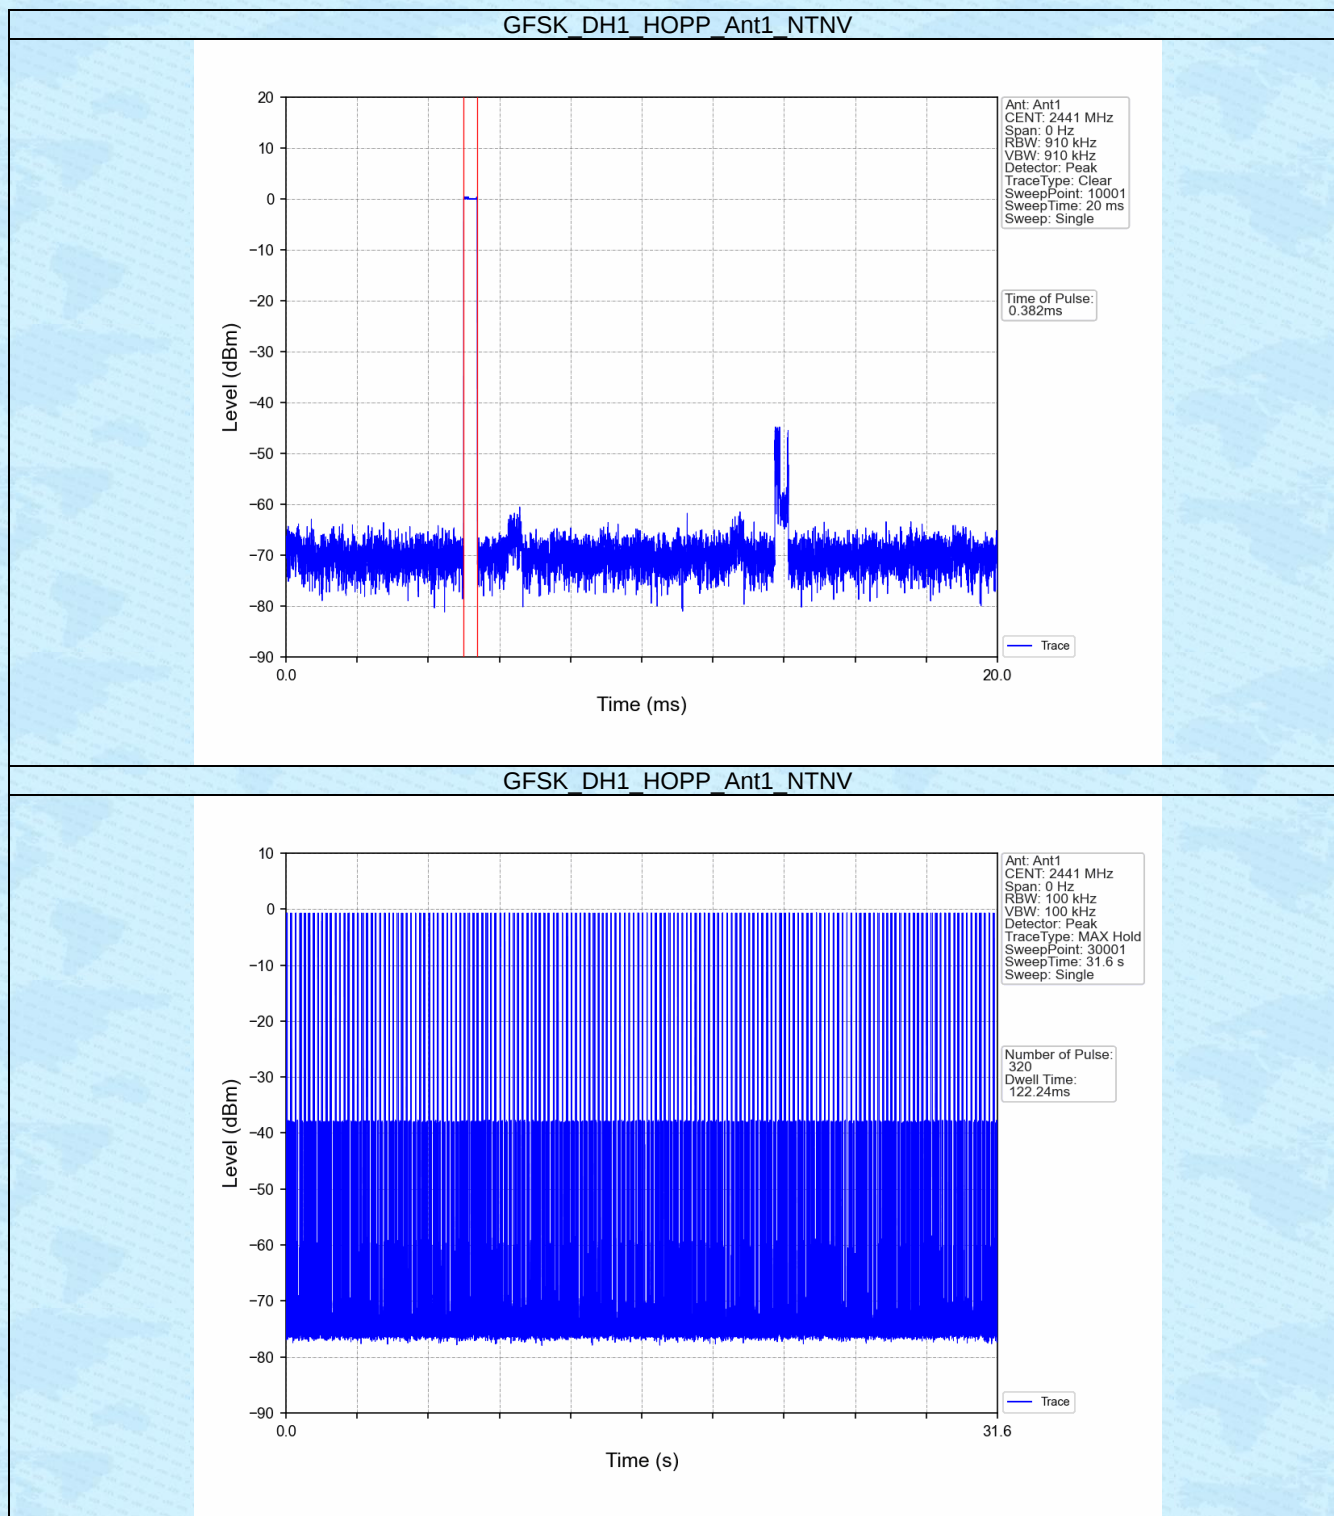


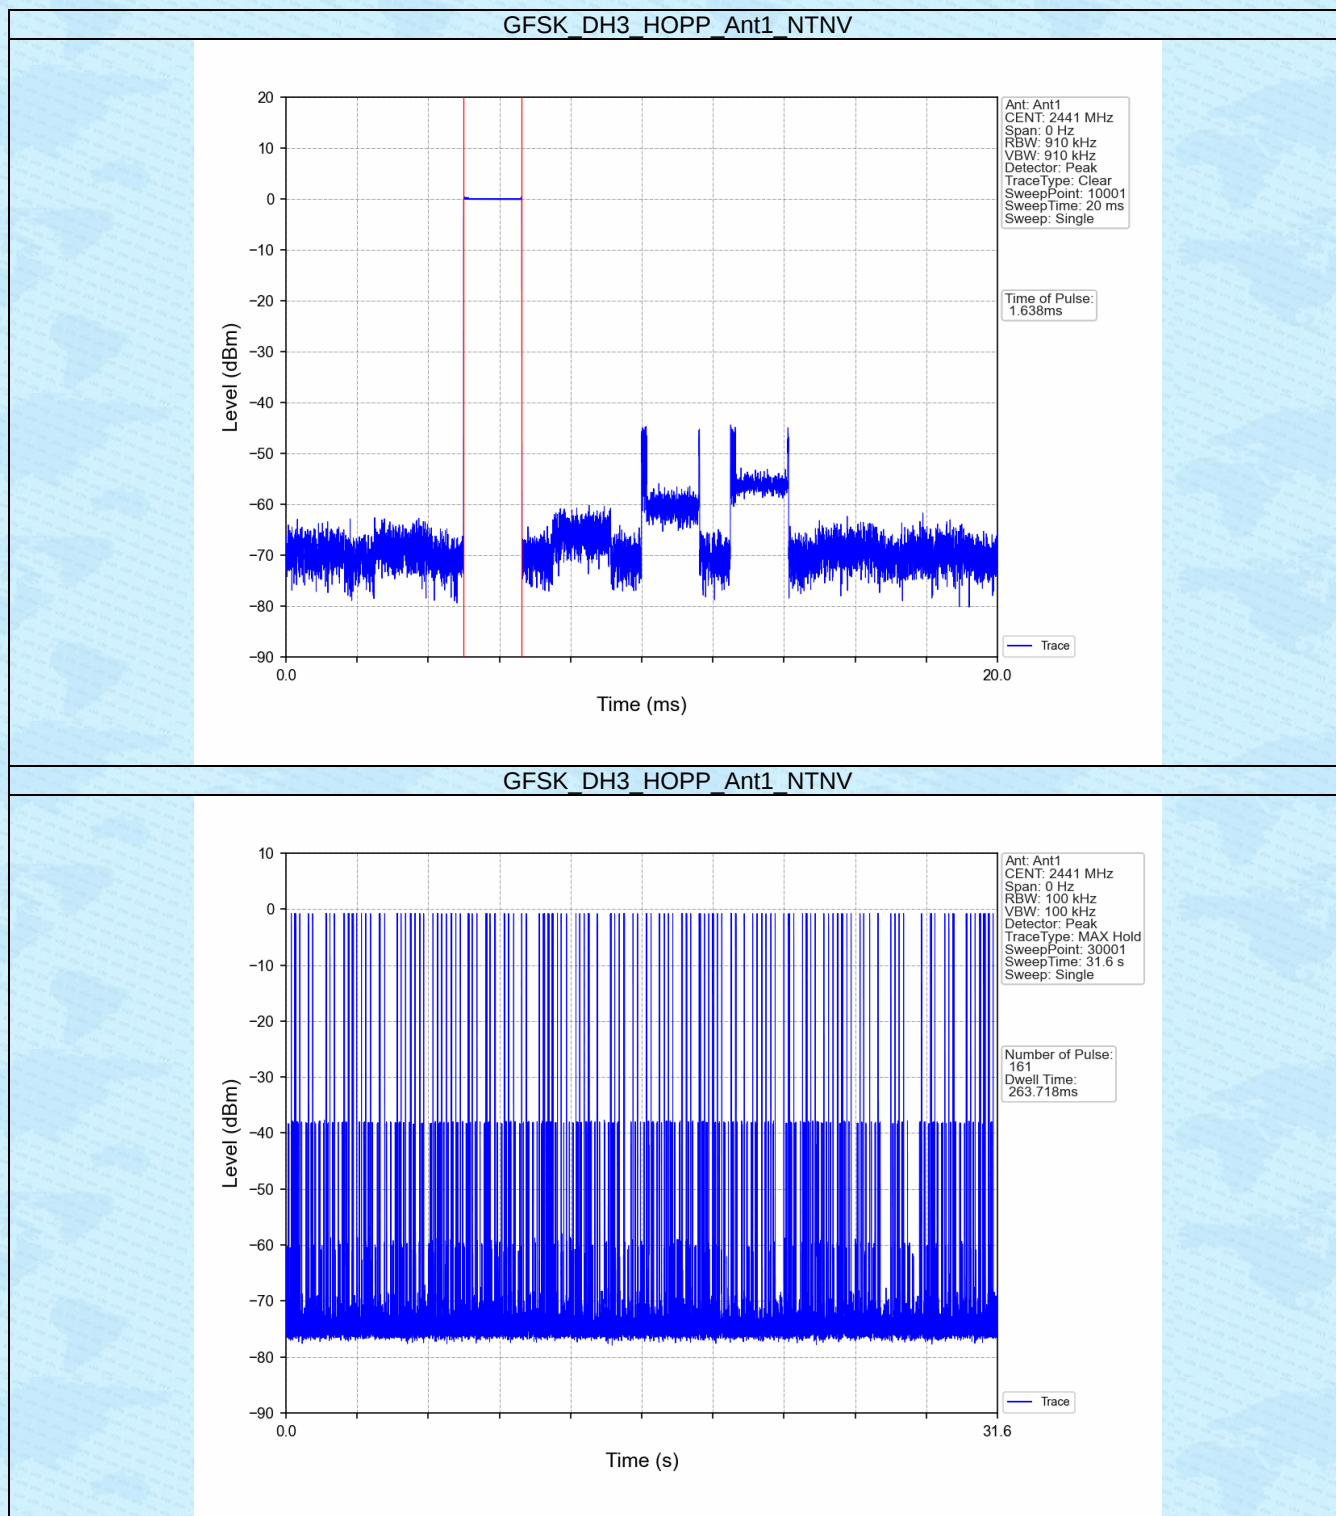

GFSK DH5 HOPP Ant1 NTN

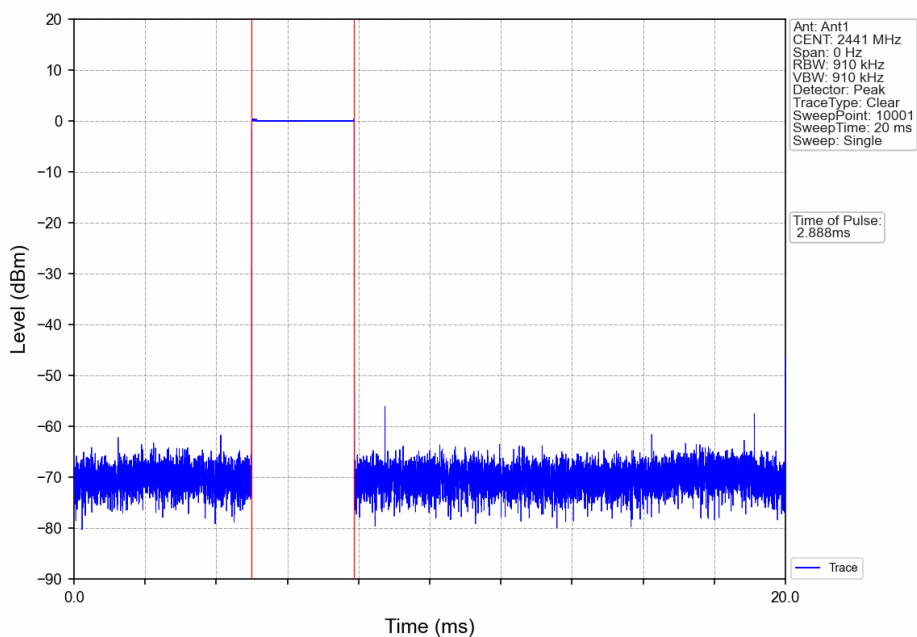

GFSK DH5 HOPP Ant1 NTN

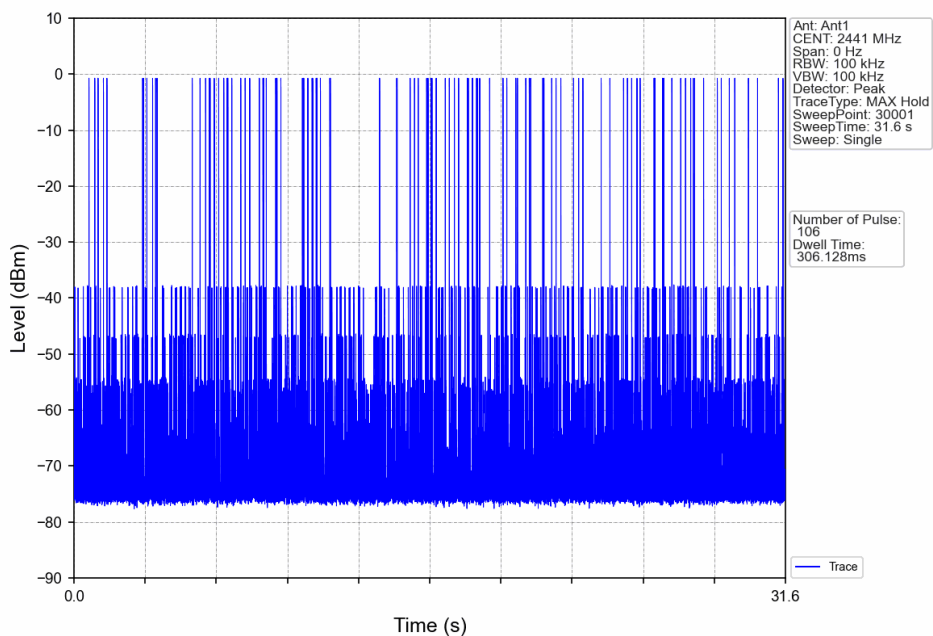


6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-0.17
		2441	DH5	1	0.26
		2480	DH5	1	0.66
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.					

6.1.2 Test Graph

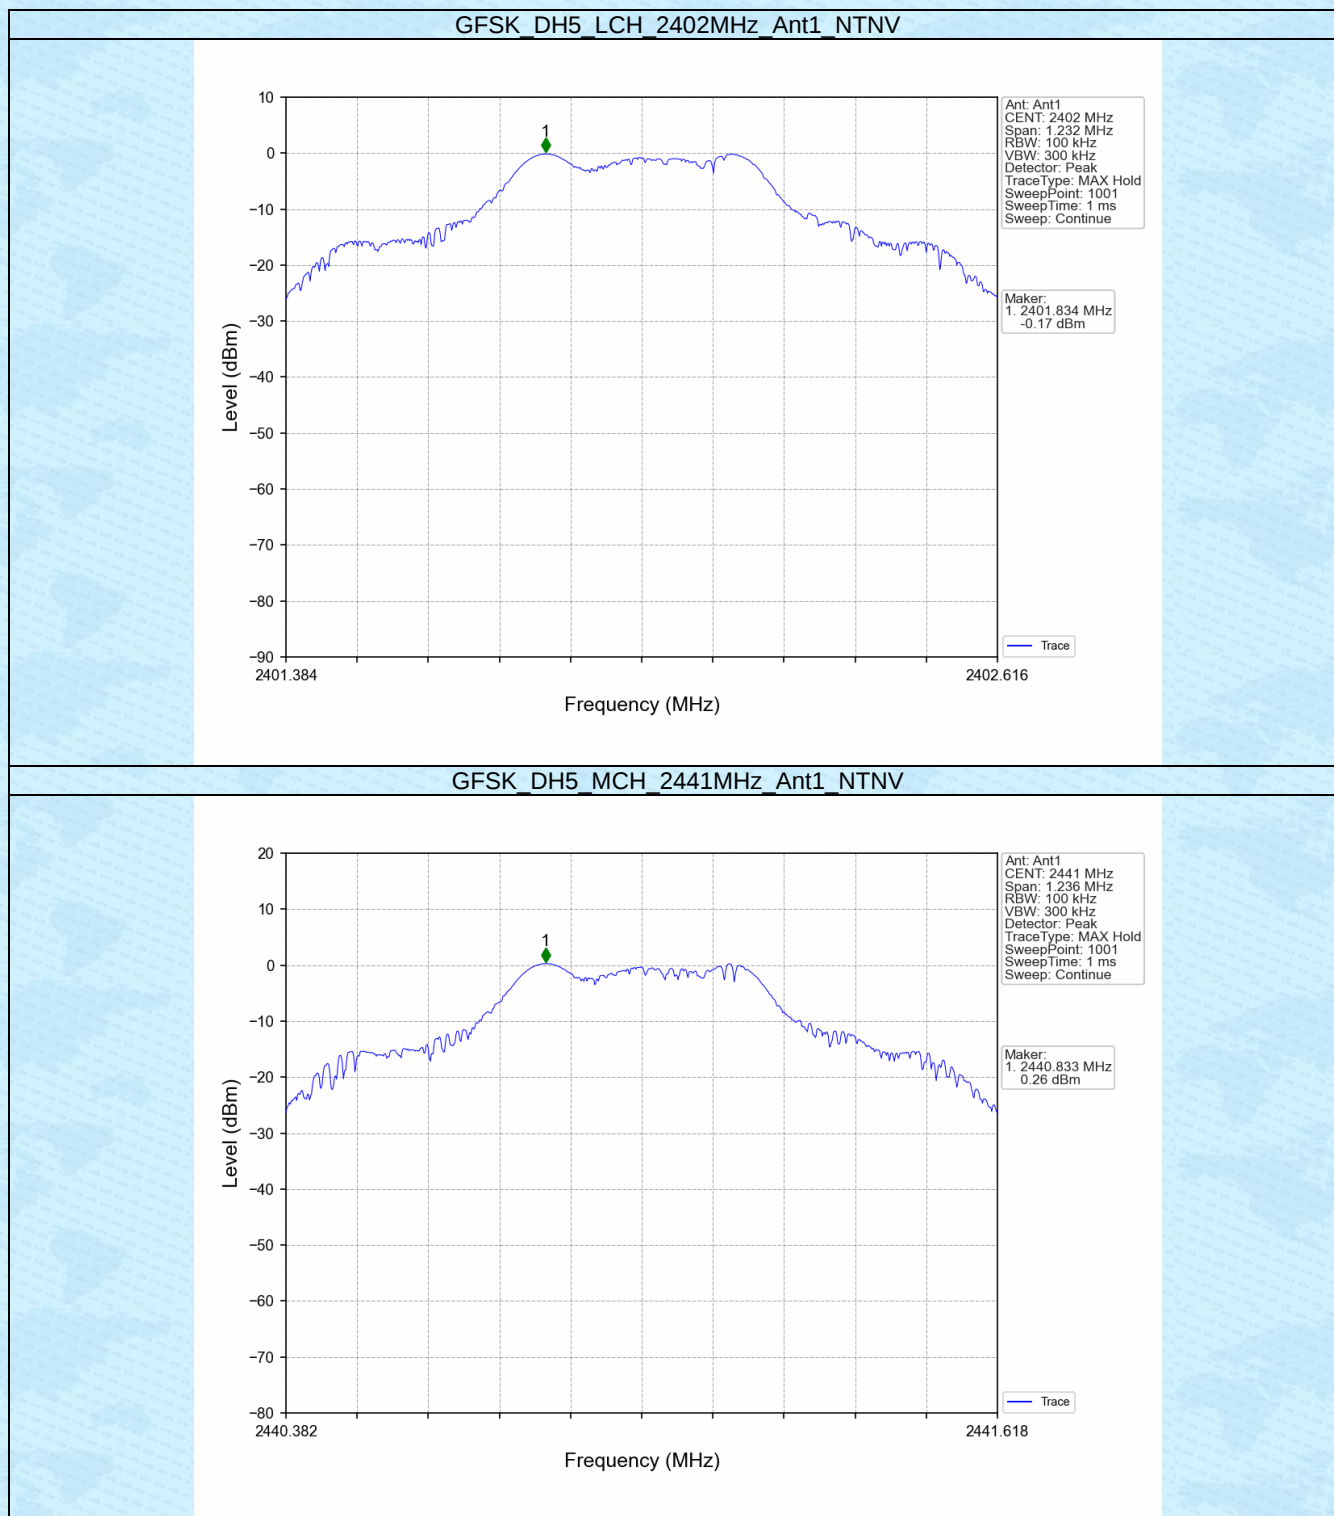

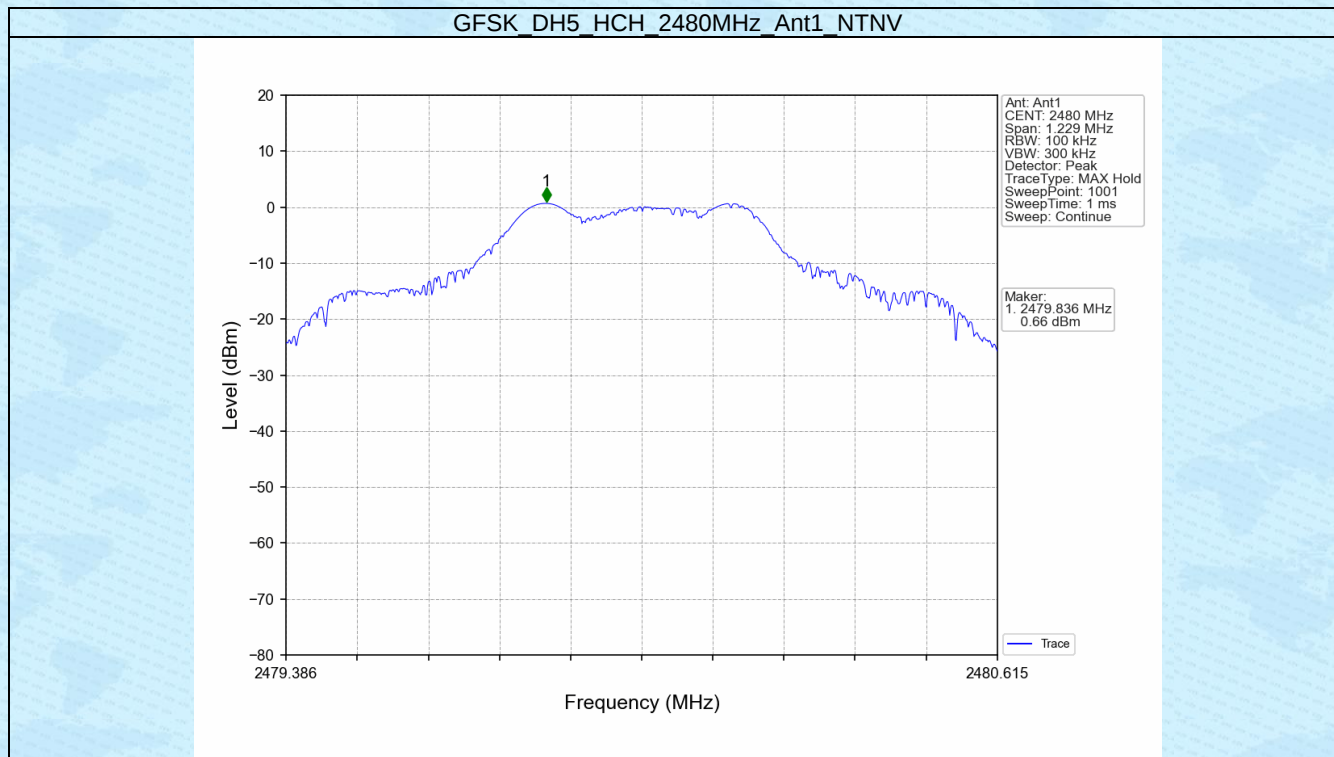


6.2 CSE


6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.66	-19.34	Pass
		2441	DH5	1	0.66	-19.34	Pass
		2480	DH5	1	0.66	-19.34	Pass
		HOPP	DH5	1	0.66	-19.34	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							


6.2.2 Test Graph

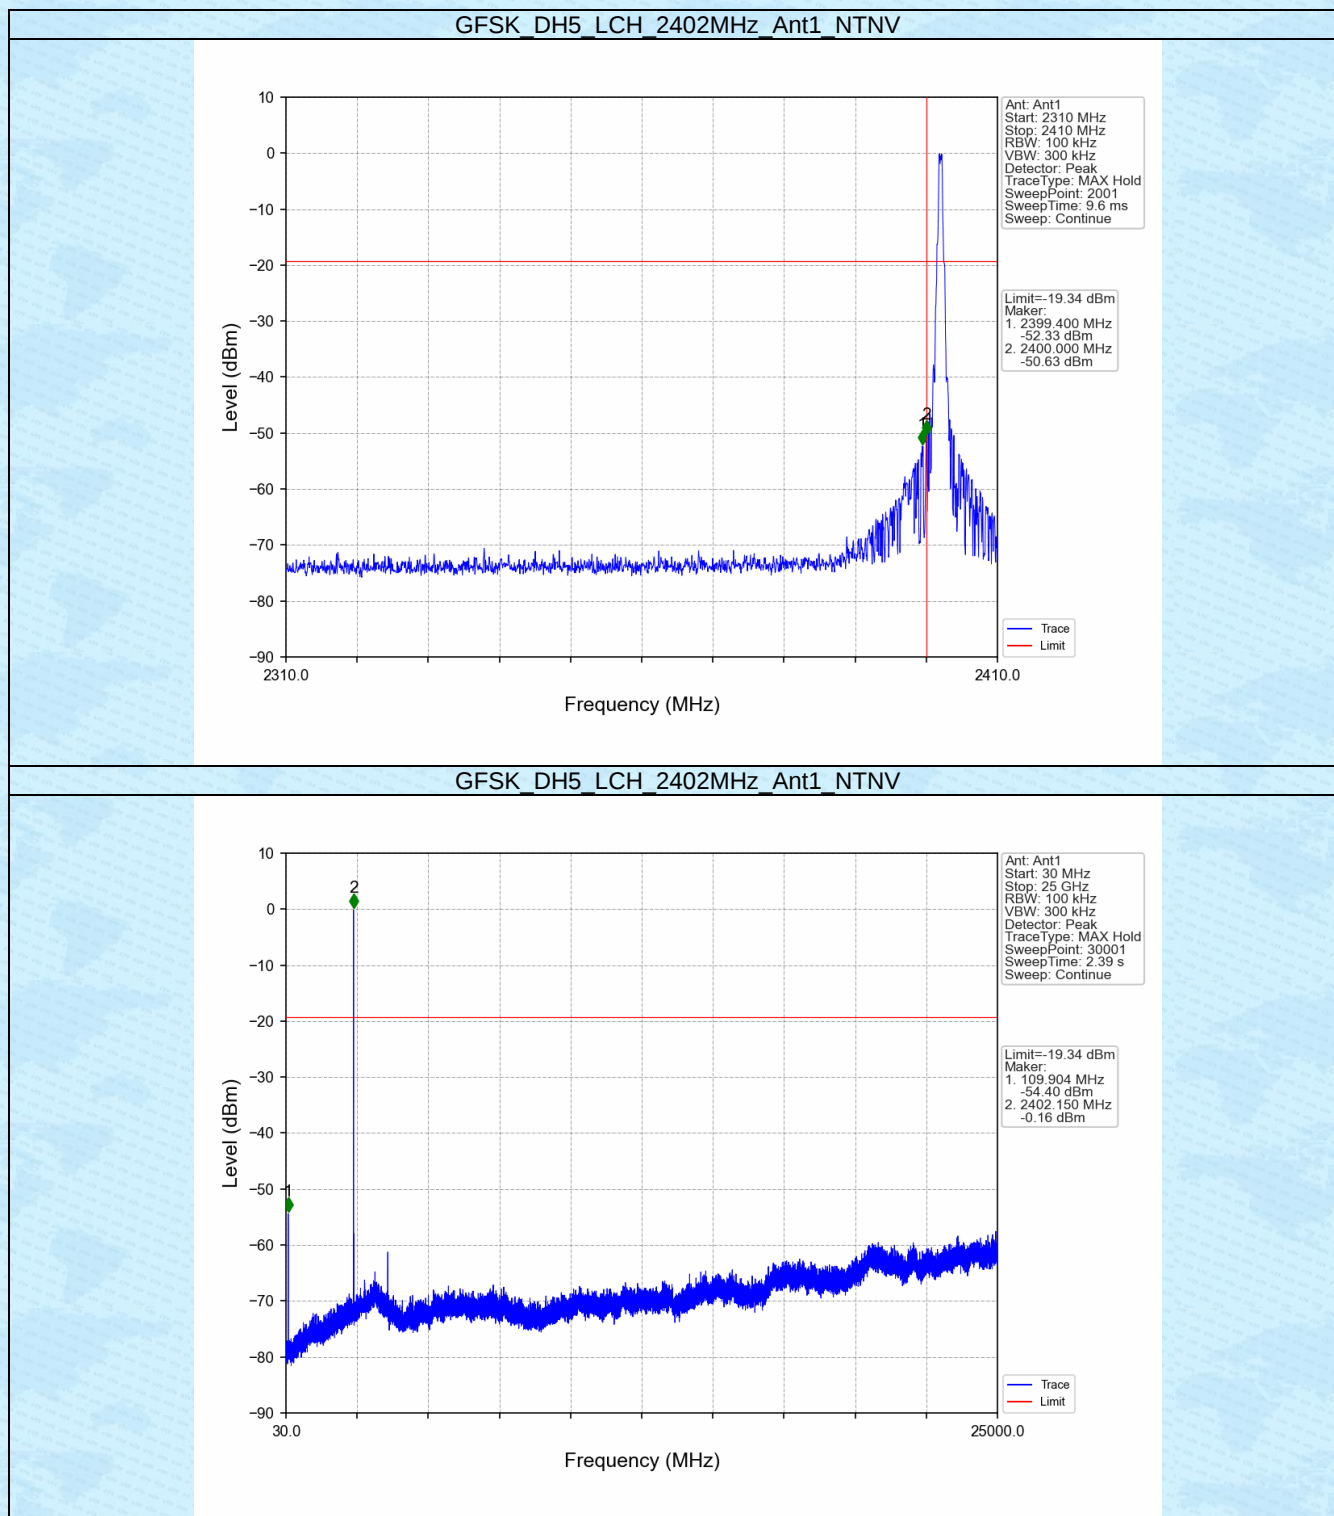


GFSK DH5 MCH 2441MHz Ant1_NTNV

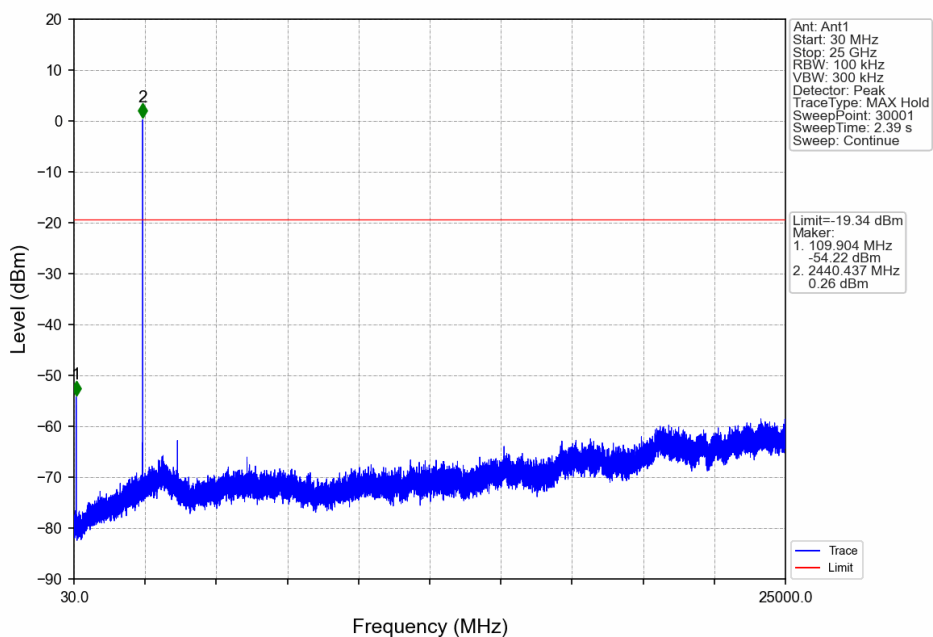


GFSK DH5 HCH 2480MHz Ant1_NTNV

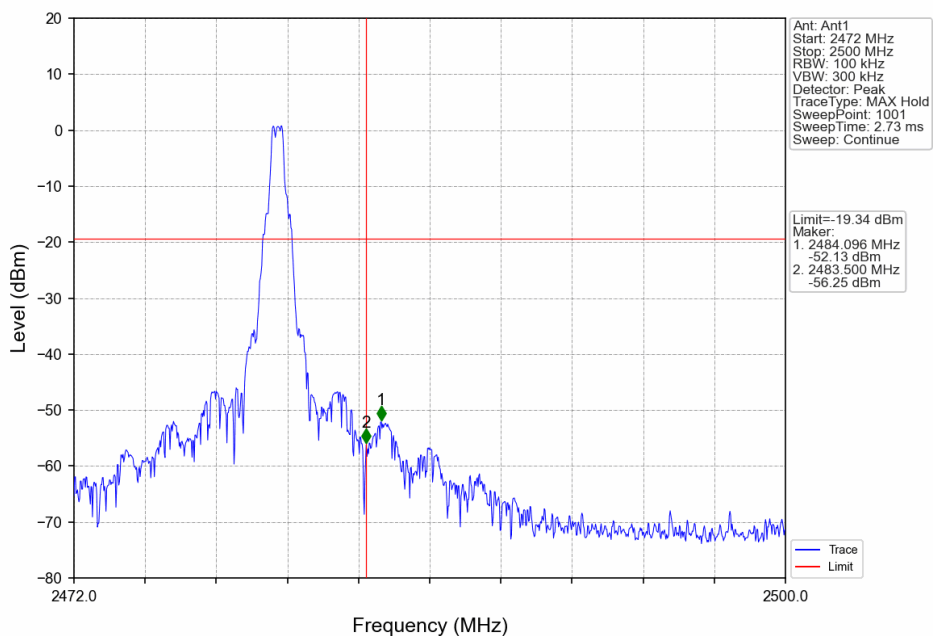


GFSK DH5 HCH 2480MHz_Ant1_NTNV

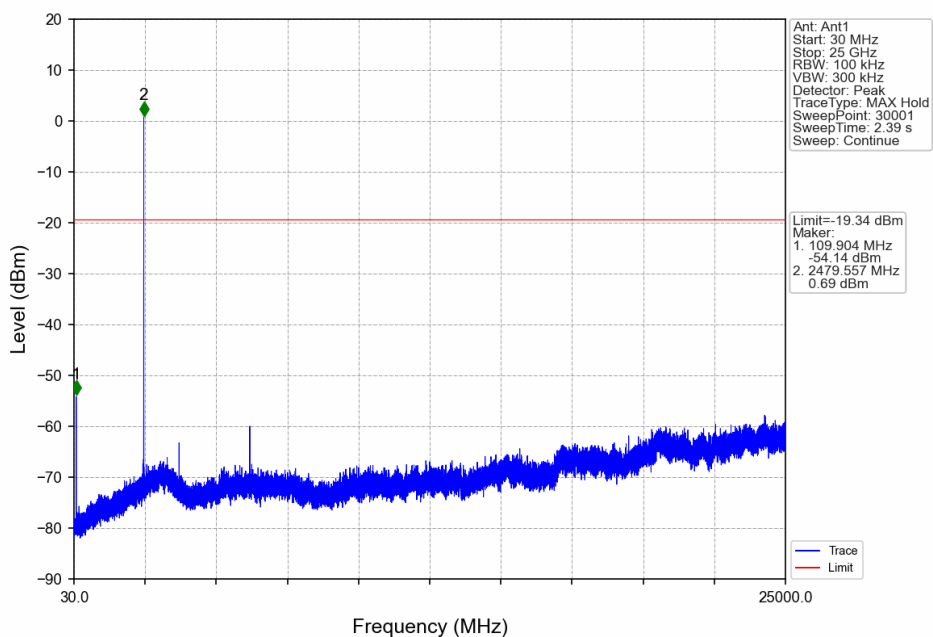

GFSK DH5 HOPP_Ant1_NTNV

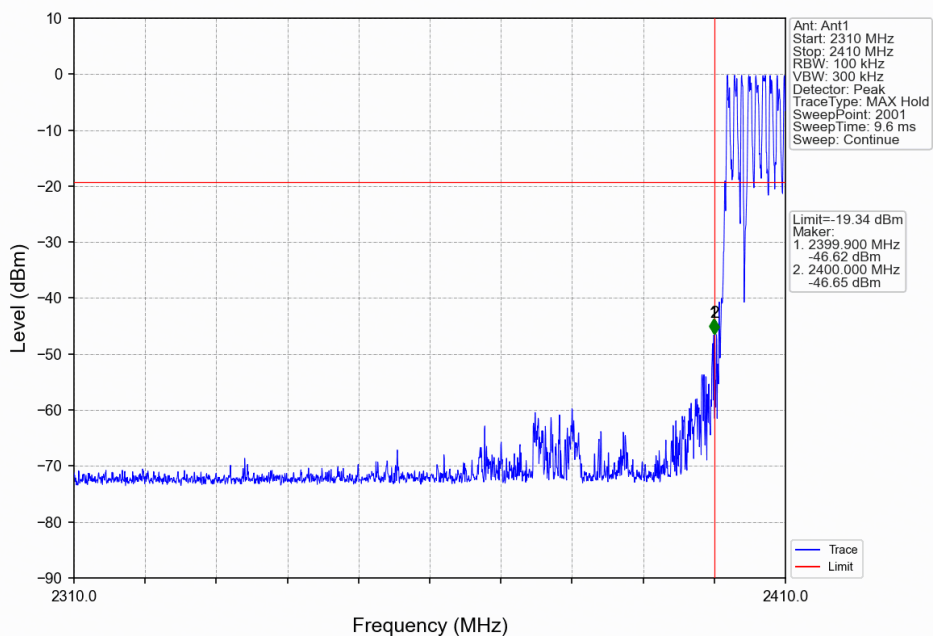

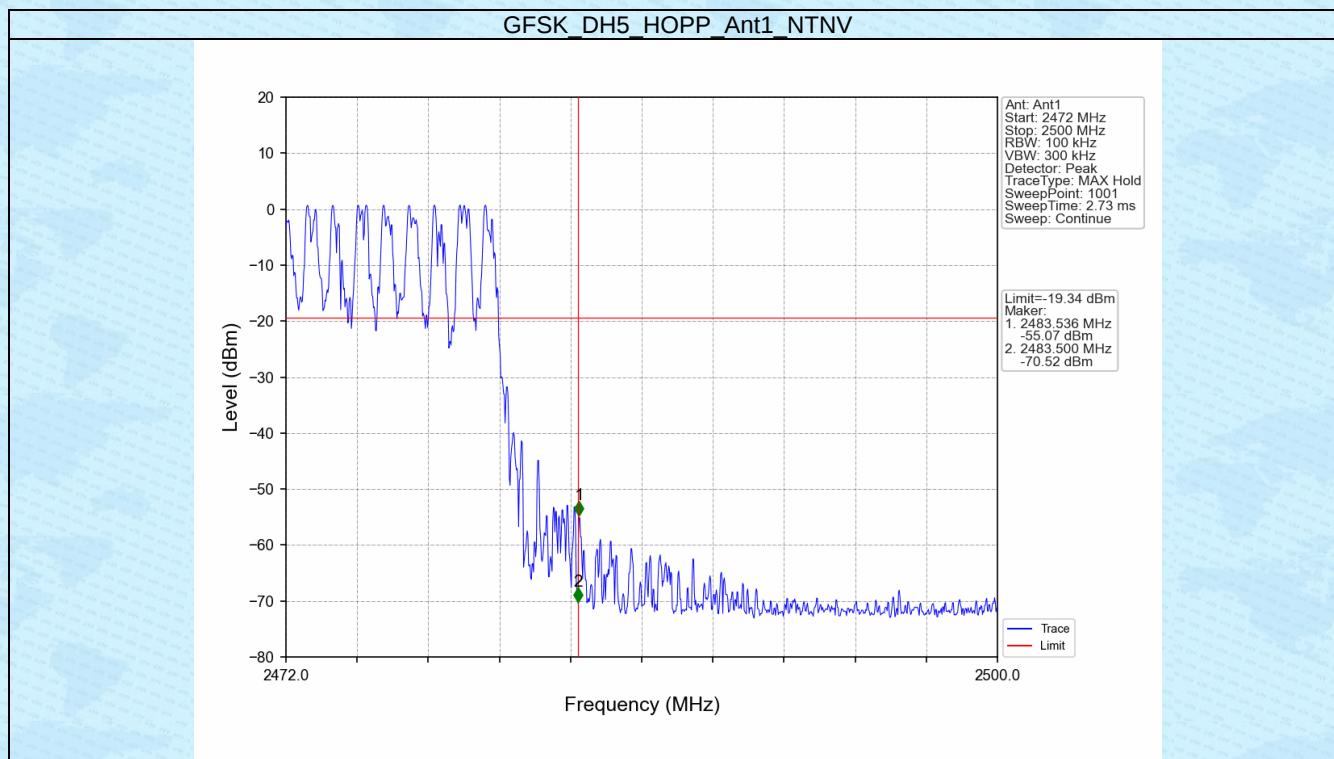

-----End-----