


Vertical:
Test Graph

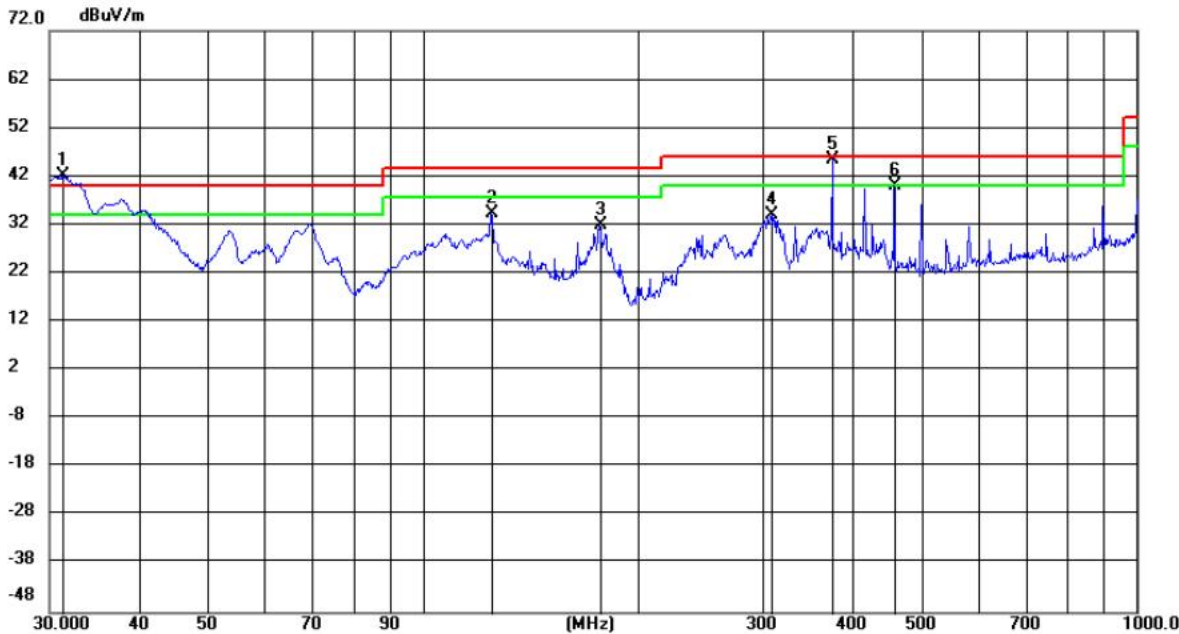

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	31.3387	29.62	12.43	42.05	40.00	2.05	QP	100	70
2		124.9847	23.13	11.26	34.39	43.50	-9.11	QP	100	102
3		177.1982	20.70	11.24	31.94	43.50	-11.56	QP	100	176
4		308.3173	17.14	16.83	33.97	46.00	-12.03	QP	100	272
5	!	375.0169	26.49	18.84	45.33	46.00	-0.67	QP	100	145
6	!	458.3905	19.74	20.30	40.04	46.00	-5.96	QP	100	17

Note:
Since the product was certified according to class A when it was certified 47 CFR Part 15 Subpart B, the data frequencies of the above fail were not generated by the wireless module, and these frequencies did not belong to 47 CFR Part 15 Subpart C section 15.205, so the evaluation could not be carried out, and the test passed.

Radiated Spurious Emission above 1GHz:

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 b mode was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) mode was the worst case; only the worst case was recorded in the report.

Mode:			802.11 b Transmitting			Channel:		2412MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1157.6105	10.16	37.14	47.30	74.00	26.70	PASS	H	PK
2	1450.5634	10.62	38.28	48.90	74.00	25.10	PASS	H	PK
3	3213.2142	-14.36	54.08	39.72	74.00	34.28	PASS	H	PK
4	4753.8169	-10.02	49.53	39.51	74.00	34.49	PASS	H	PK
5	7371.5414	-4.36	46.84	42.48	74.00	31.52	PASS	H	PK
6	10914.9277	5.04	44.75	49.79	74.00	24.21	PASS	H	PK
7	1330.6887	9.91	37.39	47.30	74.00	26.70	PASS	V	PK
8	1798.4532	14.16	36.75	50.91	74.00	23.09	PASS	V	PK
9	3328.2719	-12.90	54.24	41.34	74.00	32.66	PASS	V	PK
10	4505.5004	-8.61	49.09	40.48	74.00	33.52	PASS	V	PK
11	6800.1533	-4.86	46.40	41.54	74.00	32.46	PASS	V	PK
12	10268.7846	3.30	43.50	46.80	74.00	27.20	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1138.4092	10.03	37.62	47.65	74.00	26.35	PASS	H	PK
2	1619.7747	11.80	36.12	47.92	74.00	26.08	PASS	H	PK
3	3340.6227	-12.70	53.50	40.80	74.00	33.20	PASS	H	PK
4	4698.5632	-9.00	49.78	40.78	74.00	33.22	PASS	H	PK
5	7749.8667	-3.09	46.71	43.62	74.00	30.38	PASS	H	PK
6	11237.9992	5.53	43.59	49.12	74.00	24.88	PASS	H	PK
7	1312.1541	9.72	37.88	47.60	74.00	26.40	PASS	V	PK
8	1749.25	13.05	37.56	50.61	74.00	23.39	PASS	V	PK
9	3445.9297	-12.69	53.02	40.33	74.00	33.67	PASS	V	PK
10	5047.6365	-8.96	49.04	40.08	74.00	33.92	PASS	V	PK
11	7765.4677	-3.27	46.78	43.51	74.00	30.49	PASS	V	PK
12	11229.5486	5.29	44.16	49.45	74.00	24.55	PASS	V	PK

Mode:			802.11 b Transmitting			Channel:		2462MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1137.3425	9.99	37.77	47.76	74.00	26.24	PASS	H	PK
2	1523.7683	10.68	37.57	48.25	74.00	25.75	PASS	H	PK
3	3354.9237	-12.64	53.98	41.34	74.00	32.66	PASS	H	PK
4	4512.6508	-8.89	50.53	41.64	74.00	32.36	PASS	H	PK
5	6406.8771	-5.51	46.82	41.31	74.00	32.69	PASS	H	PK
6	11264.651	5.00	44.60	49.60	74.00	24.40	PASS	H	PK
7	1138.0092	10.02	38.29	48.31	74.00	25.69	PASS	V	PK
8	1446.9631	10.62	37.76	48.38	74.00	25.62	PASS	V	PK
9	3331.5221	-12.85	54.61	41.76	74.00	32.24	PASS	V	PK
10	4497.0498	-8.68	50.04	41.36	74.00	32.64	PASS	V	PK
11	6394.5263	-5.50	48.03	42.53	74.00	31.47	PASS	V	PK
12	11250.35	5.85	43.92	49.77	74.00	24.23	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1163.6109	9.96	39.11	49.07	74.00	24.93	PASS	H	PK
2	1403.8936	10.63	37.63	48.26	74.00	25.74	PASS	H	PK
3	3315.271	-13.10	53.93	40.83	74.00	33.17	PASS	H	PK
4	4506.1504	-8.64	50.55	41.91	74.00	32.09	PASS	H	PK
5	5378.5086	-8.35	49.98	41.63	74.00	32.37	PASS	H	PK
6	6408.8273	-5.58	47.23	41.65	74.00	32.35	PASS	H	PK
7	11275.7017	4.34	45.58	49.92	74.00	24.08	PASS	H	PK
8	1155.477	10.23	38.41	48.64	74.00	25.36	PASS	V	PK
9	1402.2935	10.63	38.05	48.68	74.00	25.32	PASS	V	PK
10	3700.0967	-12.47	53.30	40.83	74.00	33.17	PASS	V	PK
11	5353.1569	-8.28	49.44	41.16	74.00	32.84	PASS	V	PK
12	7952.6802	-1.80	45.76	43.96	74.00	30.04	PASS	V	PK
13	11991.3994	5.88	45.02	50.90	74.00	23.10	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1154.8103	10.25	37.69	47.94	74.00	26.06	PASS	H	PK
2	1386.0257	10.49	38.11	48.60	74.00	25.40	PASS	H	PK
3	3440.7294	-12.77	54.18	41.41	74.00	32.59	PASS	H	PK
4	5039.1859	-9.52	49.84	40.32	74.00	33.68	PASS	H	PK
5	6900.9101	-4.09	46.63	42.54	74.00	31.46	PASS	H	PK
6	11973.8483	5.88	44.98	50.86	74.00	23.14	PASS	H	PK
7	1155.8771	10.22	38.03	48.25	74.00	25.75	PASS	V	PK
8	1460.0307	10.58	37.84	48.42	74.00	25.58	PASS	V	PK
9	3331.5221	-12.85	53.52	40.67	74.00	33.33	PASS	V	PK
10	5070.388	-9.12	50.79	41.67	74.00	32.33	PASS	V	PK
11	7949.43	-1.56	45.37	43.81	74.00	30.19	PASS	V	PK
12	11947.8465	5.77	44.78	50.55	74.00	23.45	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1134.6756	9.90	37.85	47.75	74.00	26.25	PASS	H	PK
2	1403.7603	10.63	37.91	48.54	74.00	25.46	PASS	H	PK
3	3413.4276	-13.24	54.07	40.83	74.00	33.17	PASS	H	PK
4	4500.3	-8.41	50.45	42.04	74.00	31.96	PASS	H	PK
5	7934.479	-1.88	45.32	43.44	74.00	30.56	PASS	H	PK
6	11248.3999	5.83	44.42	50.25	74.00	23.75	PASS	H	PK
7	1145.4764	10.27	38.06	48.33	74.00	25.67	PASS	V	PK
8	1417.8945	10.63	37.33	47.96	74.00	26.04	PASS	V	PK
9	3263.2676	-13.88	55.53	41.65	74.00	32.35	PASS	V	PK
10	4502.9002	-8.51	49.34	40.83	74.00	33.17	PASS	V	PK
11	5839.3893	-7.22	48.83	41.61	74.00	32.39	PASS	V	PK
12	7944.8797	-1.66	44.78	43.12	74.00	30.88	PASS	V	PK
13	11954.997	5.87	44.11	49.98	74.00	24.02	PASS	V	PK

MIMO:

Mode:			802.11 n(HT40) Transmitting			Channel:		2422MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1155.3437	10.24	38.28	48.52	74.00	25.48	PASS	H	PK
2	1396.8265	10.60	38.03	48.63	74.00	25.37	PASS	H	PK
3	3445.2797	-12.70	53.65	40.95	74.00	33.05	PASS	H	PK
4	4399.5433	-10.08	51.74	41.66	74.00	32.34	PASS	H	PK
5	6407.5272	-5.53	47.53	42.00	74.00	32.00	PASS	H	PK
6	11946.5464	5.72	44.61	50.33	74.00	23.67	PASS	H	PK
7	1118.1412	9.36	38.34	47.70	74.00	26.30	PASS	V	PK
8	1394.5596	10.57	38.21	48.78	74.00	25.22	PASS	V	PK
9	3342.5728	-12.67	54.01	41.34	74.00	32.66	PASS	V	PK
10	4502.2502	-8.49	49.67	41.18	74.00	32.82	PASS	V	PK
11	7573.0549	-4.05	47.90	43.85	74.00	30.15	PASS	V	PK
12	11962.1475	5.88	44.88	50.76	74.00	23.24	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1116.1411	9.30	39.01	48.31	74.00	25.69	PASS	H	PK
2	1400.16	10.63	38.40	49.03	74.00	24.97	PASS	H	PK
3	3335.4224	-12.79	54.11	41.32	74.00	32.68	PASS	H	PK
4	4697.2632	-9.04	50.54	41.50	74.00	32.50	PASS	H	PK
5	6882.7088	-4.50	47.63	43.13	74.00	30.87	PASS	H	PK
6	11243.8496	5.70	44.35	50.05	74.00	23.95	PASS	H	PK
7	1130.4087	9.76	38.92	48.68	74.00	25.32	PASS	V	PK
8	1491.6328	10.46	37.38	47.84	74.00	26.16	PASS	V	PK
9	3344.523	-12.64	54.00	41.36	74.00	32.64	PASS	V	PK
10	5359.6573	-8.30	48.82	40.52	74.00	33.48	PASS	V	PK
11	7405.3437	-4.50	47.71	43.21	74.00	30.79	PASS	V	PK
12	11969.948	5.88	44.07	49.95	74.00	24.05	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1119.0746	9.39	40.08	49.47	74.00	24.53	PASS	H	PK
2	1409.3606	10.63	38.93	49.56	74.00	24.44	PASS	H	PK
3	3421.8781	-13.10	53.55	40.45	74.00	33.55	PASS	H	PK
4	4507.4505	-8.69	50.46	41.77	74.00	32.23	PASS	H	PK
5	7949.43	-1.56	45.02	43.46	74.00	30.54	PASS	H	PK
6	12003.7502	5.58	44.22	49.80	74.00	24.20	PASS	H	PK
7	1148.6766	10.37	38.40	48.77	74.00	25.23	PASS	V	PK
8	1444.1629	10.62	37.77	48.39	74.00	25.61	PASS	V	PK
9	3347.7732	-12.58	53.30	40.72	74.00	33.28	PASS	V	PK
10	4498.9999	-8.50	49.62	41.12	74.00	32.88	PASS	V	PK
11	6404.277	-5.42	47.18	41.76	74.00	32.24	PASS	V	PK
12	11959.5473	5.88	44.96	50.84	74.00	23.16	PASS	V	PK

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Test plot as follows:

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

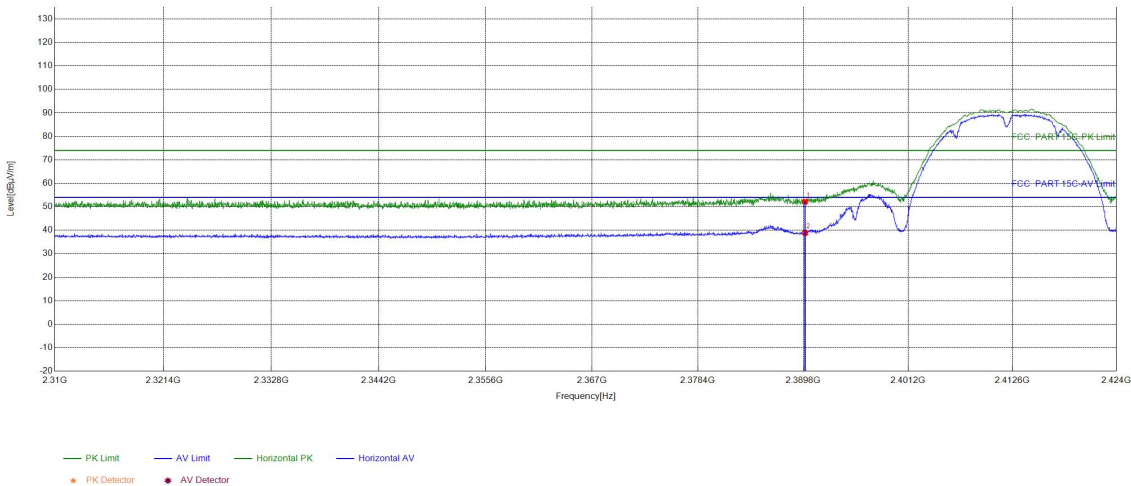

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.88	52.19	74.00	21.81	PASS	Horizontal	PK
2	2390	15.31	23.54	38.85	54.00	15.15	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

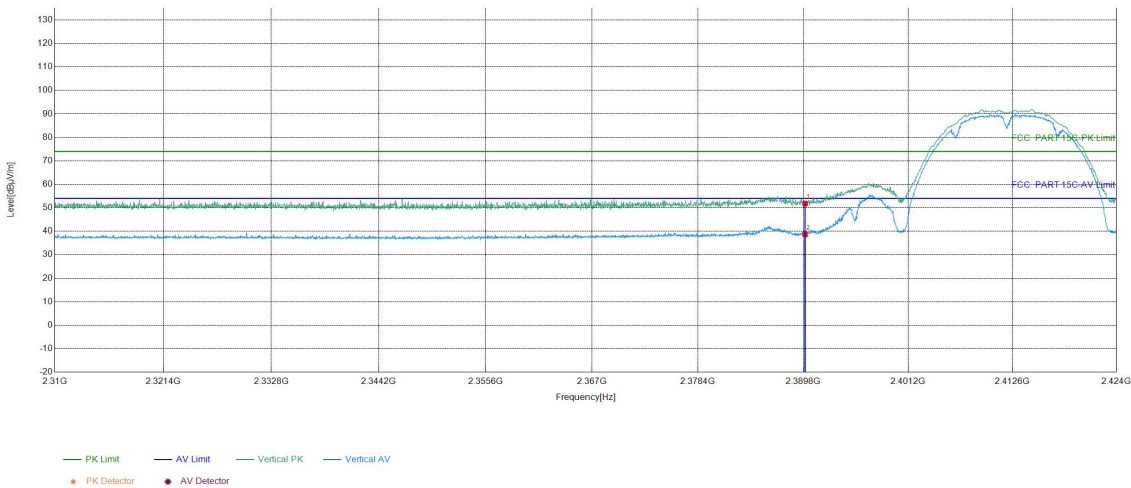

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	36.52	51.83	74.00	22.17	PASS	Vertical	PK
2	2390	15.31	23.38	38.69	54.00	15.31	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

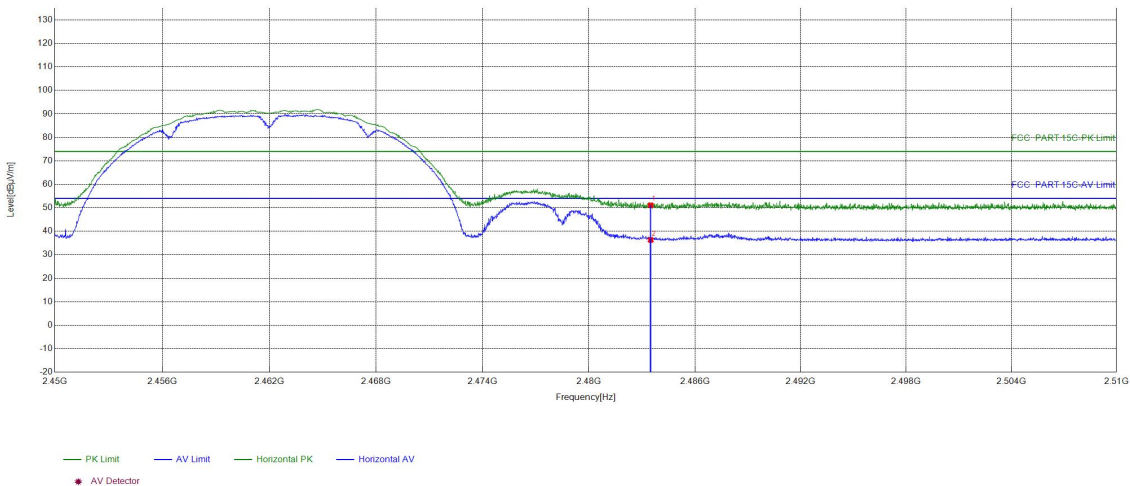

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	35.93	51.09	74.00	22.91	PASS	Horizontal	PK
2	2483.5	15.16	21.14	36.30	54.00	17.70	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

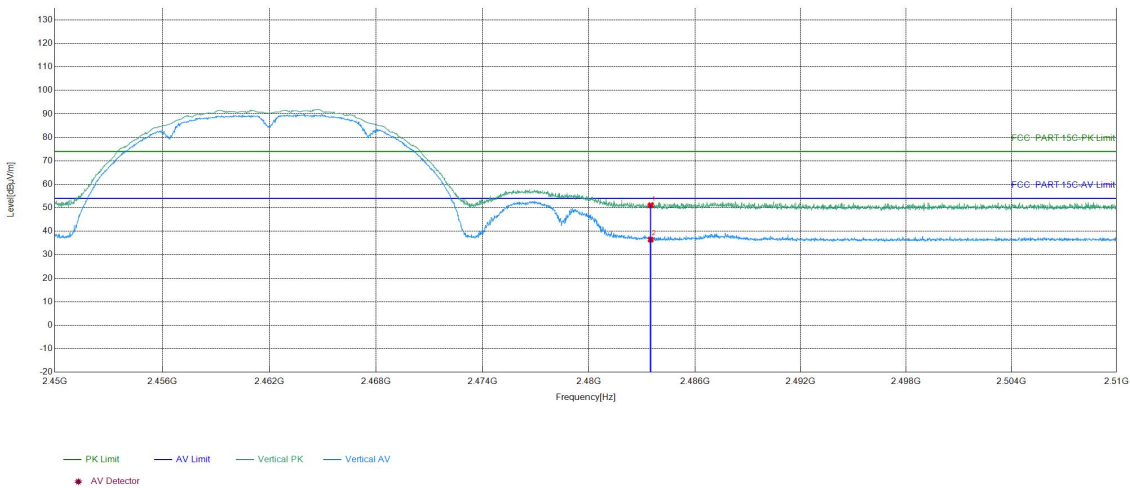

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	35.90	51.06	74.00	22.94	PASS	Vertical	PK
2	2483.5	15.16	21.28	36.44	54.00	17.56	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

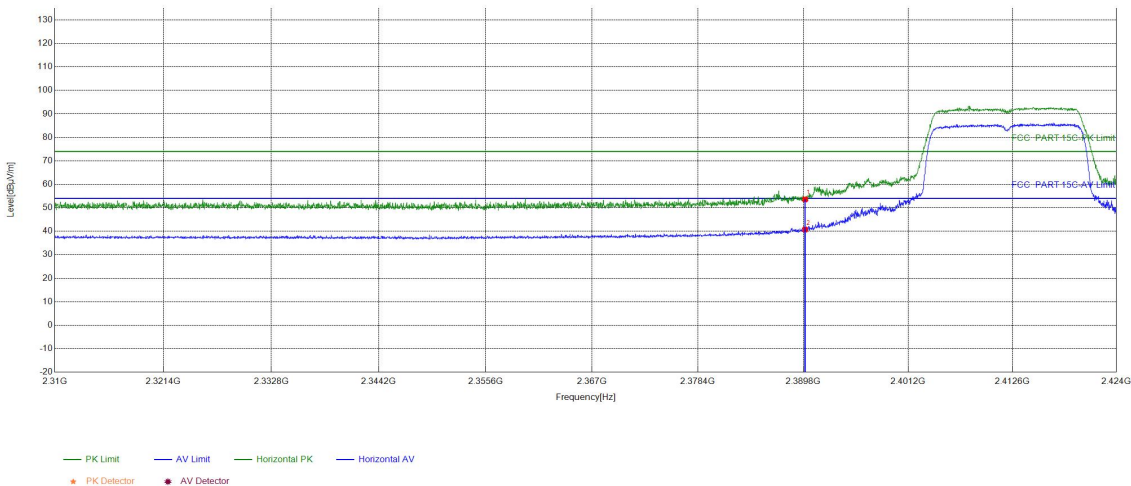

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.27	53.58	74.00	20.42	PASS	Horizontal	PK
2	2390	15.31	25.44	40.75	54.00	13.25	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

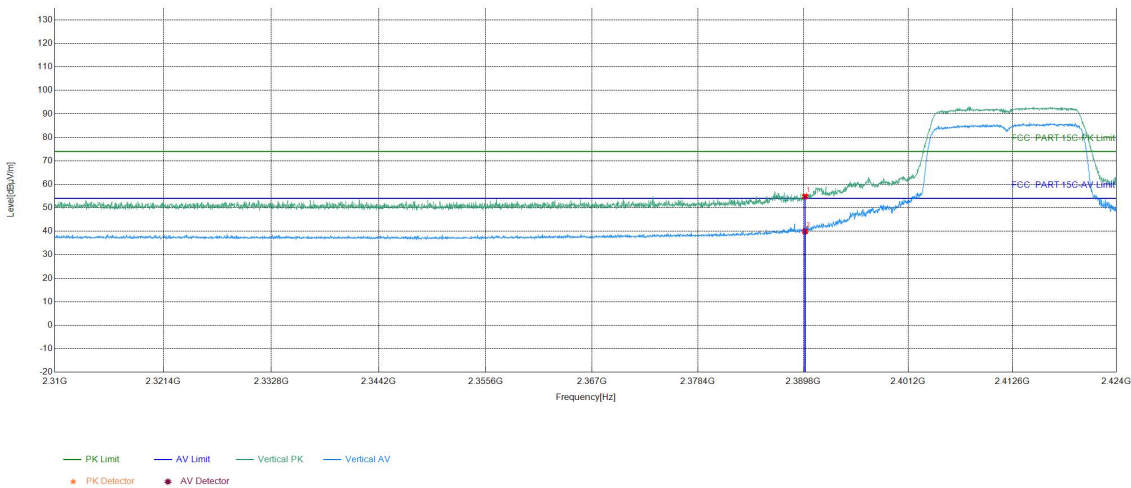

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	39.50	54.81	74.00	19.19	PASS	Vertical	PK
2	2390	15.31	24.65	39.96	54.00	14.04	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

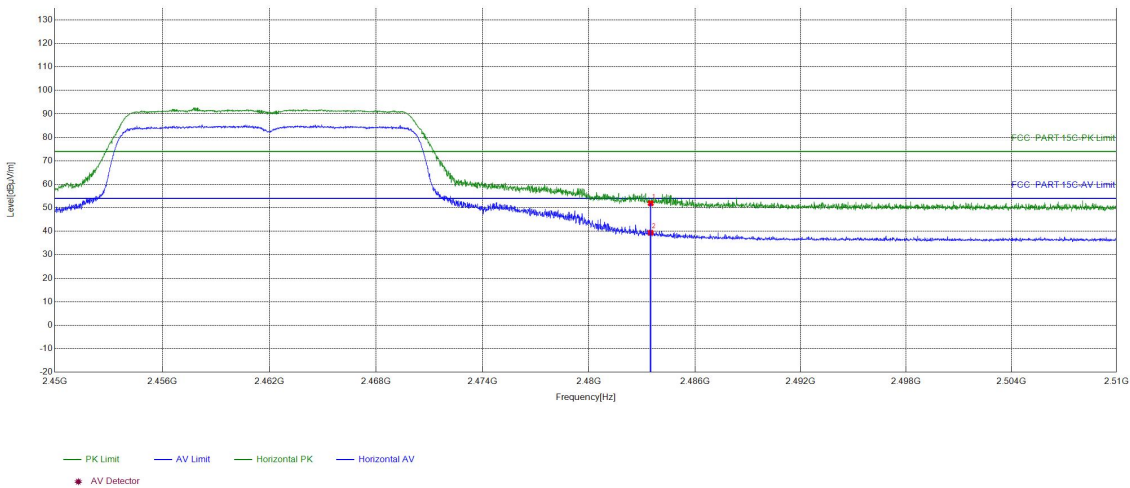

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	36.72	51.88	74.00	22.12	PASS	Horizontal	PK
2	2483.5	15.16	24.24	39.40	54.00	14.60	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

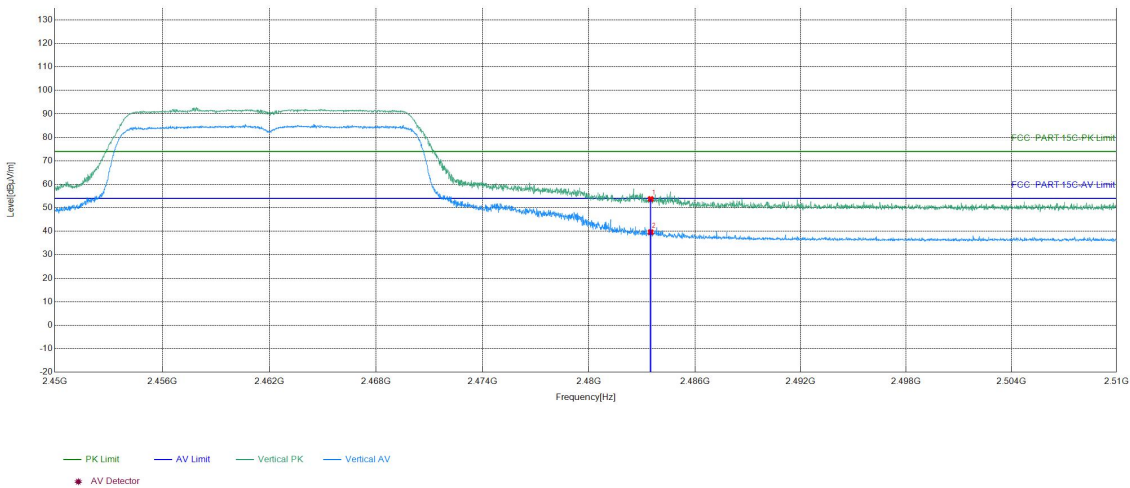

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	38.58	53.74	74.00	20.26	PASS	Vertical	PK
2	2483.5	15.16	24.45	39.61	54.00	14.39	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

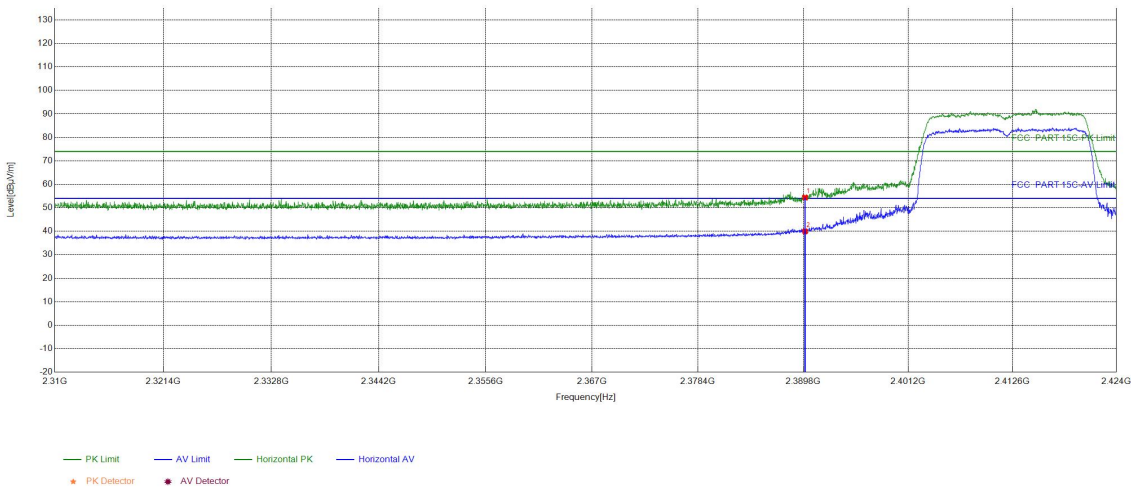

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	39.08	54.39	74.00	19.61	PASS	Horizontal	PK
2	2390	15.31	24.64	39.95	54.00	14.05	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

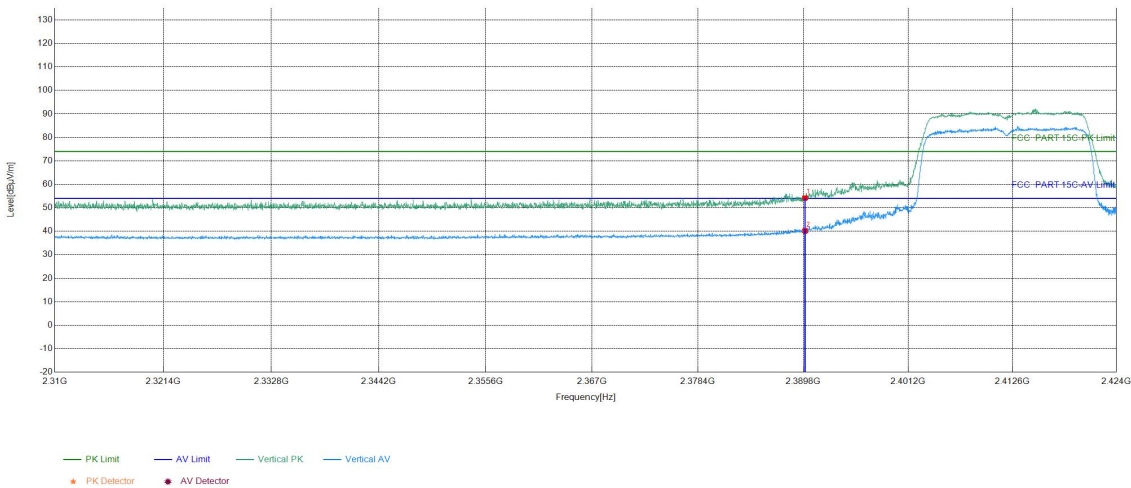

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.88	54.19	74.00	19.81	PASS	Vertical	PK
2	2390	15.31	24.87	40.18	54.00	13.82	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

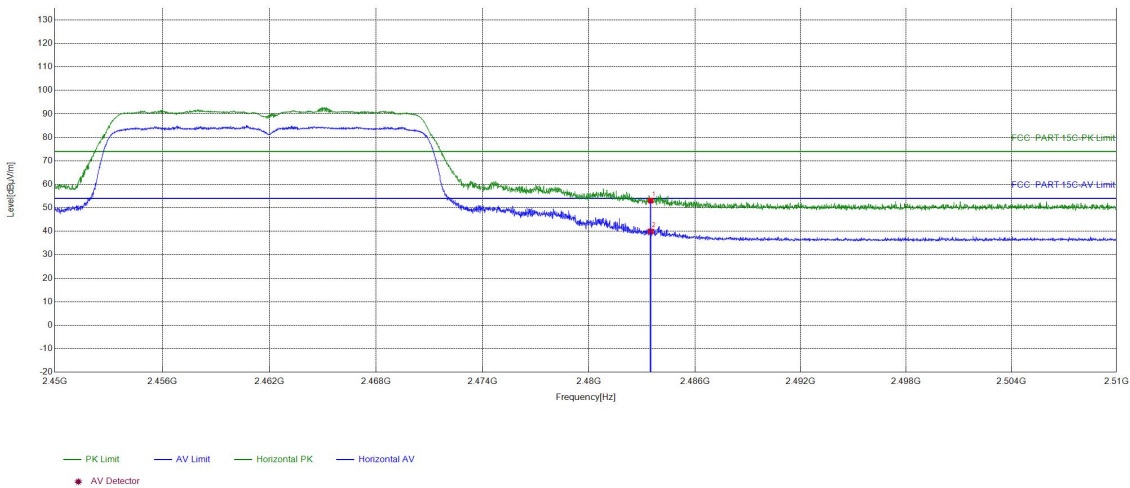

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	37.88	53.04	74.00	20.96	PASS	Horizontal	PK
2	2483.5	15.16	24.76	39.92	54.00	14.08	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

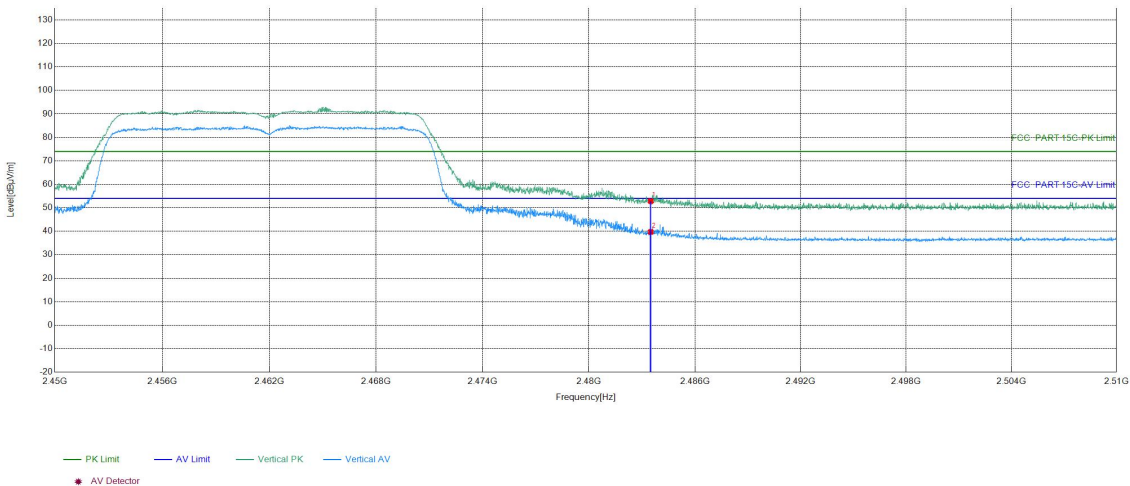

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	37.68	52.84	74.00	21.16	PASS	Vertical	PK
2	2483.5	15.16	24.55	39.71	54.00	14.29	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

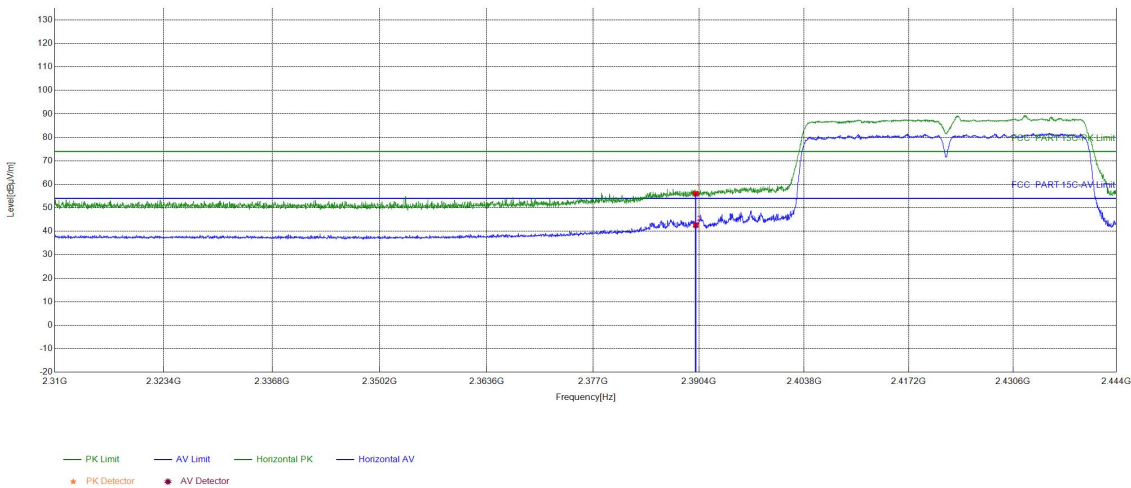

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	40.72	56.03	74.00	17.97	PASS	Horizontal	PK
2	2390	15.31	27.31	42.62	54.00	11.38	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

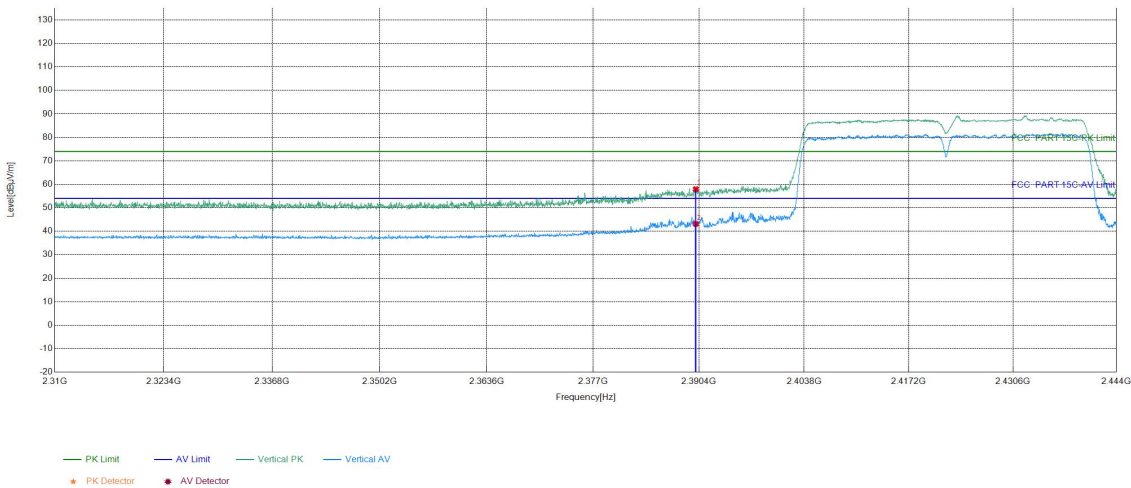

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	42.63	57.94	74.00	16.06	PASS	Vertical	PK
2	2390	15.31	27.82	43.13	54.00	10.87	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

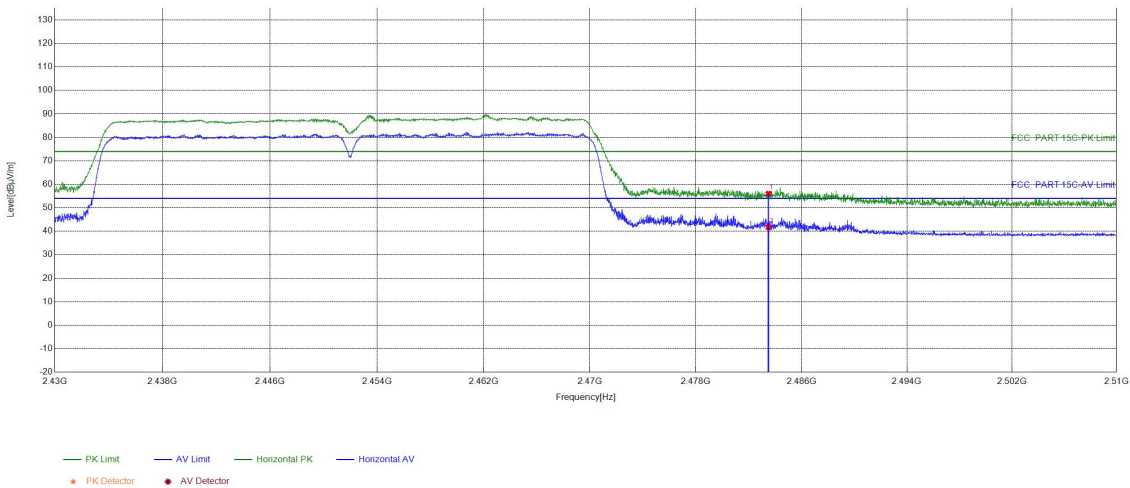

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	40.86	56.02	74.00	17.98	PASS	Horizontal	PK
2	2483.5	15.16	26.56	41.72	54.00	12.28	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

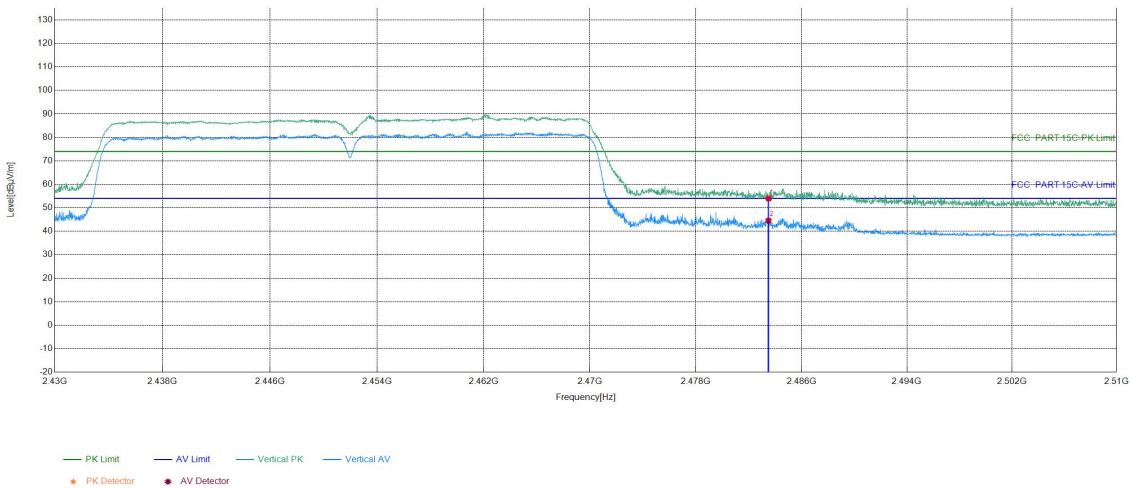

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	15.16	38.82	53.98	74.00	20.02	PASS	Vertical	PK
2	2483.5	15.16	29.37	44.53	54.00	9.47	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		


Test Graph

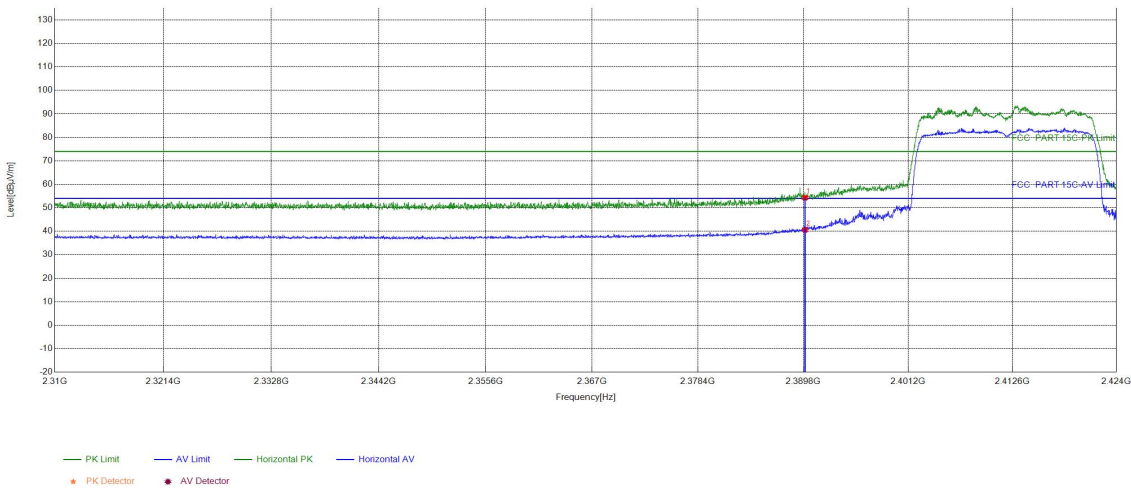

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	38.97	54.28	74.00	19.72	PASS	Horizontal	PK
2	2390	15.31	25.31	40.62	54.00	13.38	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 ax(HE20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/02/17
Remark	23.5°C56.9%\		

Test Graph

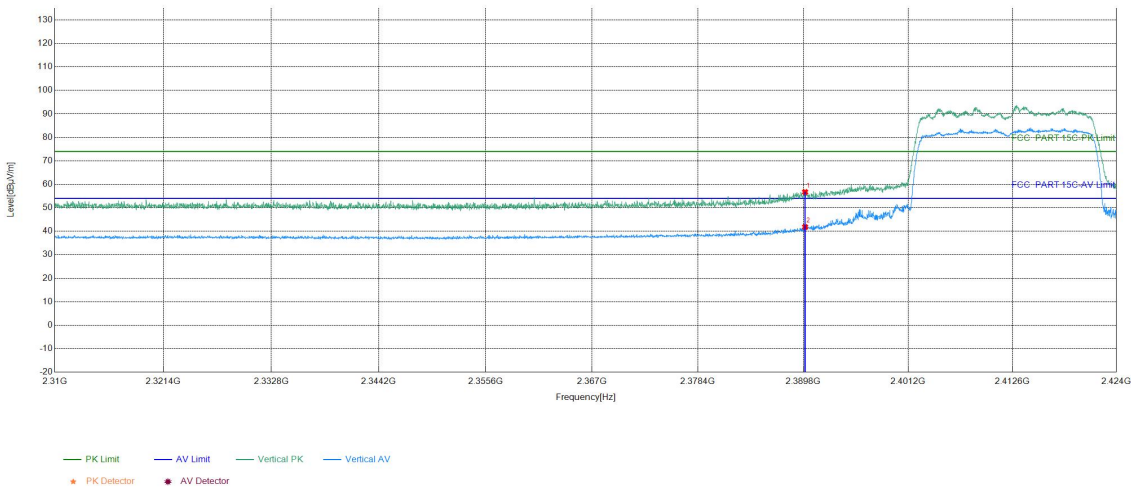

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.31	41.40	56.71	74.00	17.29	PASS	Vertical	PK
2	2390	15.31	26.50	41.81	54.00	12.19	PASS	Vertical	AV