



深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

Antenna Specification

TC: 长城

MN: W14198

RF: 刘磊确

MD: 黄清清

MP: 13005478517

Date: 2024. 5. 9

REV :V1. 0



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

测试信息

Test information


WIFI ANT Test information

Frequency


2. 4G (2402~2483) Mhz

5G (5150~5850) Mhz

Module
information

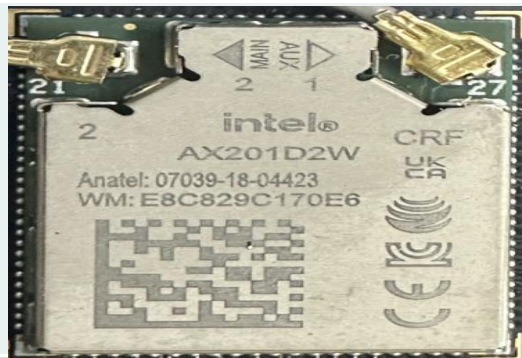


Driver version
information

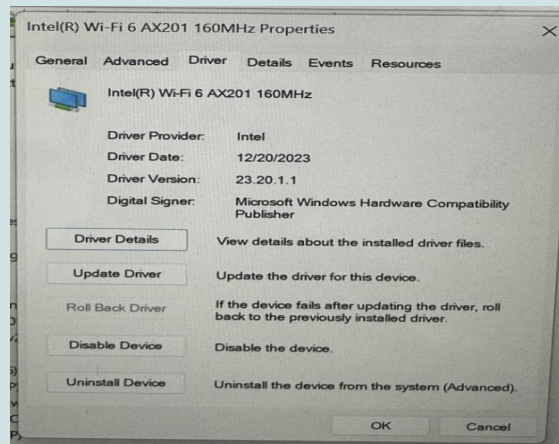

测试环境

Test environment


	测试项目	测试设备
S参数 (S-parameter)	1. 电压驻波比 (VSWR) 2. 回波损耗 (Rrtun Loss)	网络分析仪: Agilent8753ES
2. 有源测试 (Active)	1. 发射功率 (TRP) 2. 接收灵敏度 (TIS) 3. 屏灭/屏亮	1. 暗室: 5*3*3m (3D) Chamber 2. 综测仪: Agilent8960 CMW500
3. 无源测试 (Passive)	1. 天线增益 (Gain) 2. 天线效率 (Efficiency)	1. 暗室: 5*3*3m (3D) Chamber 2. 网络分析仪: Agilent 8753ES

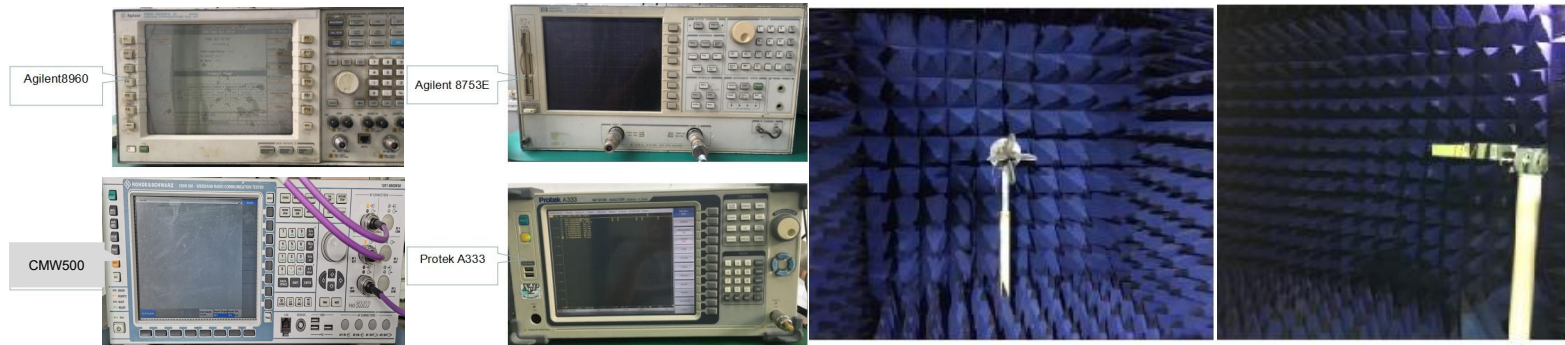



天线位置

Antenna position

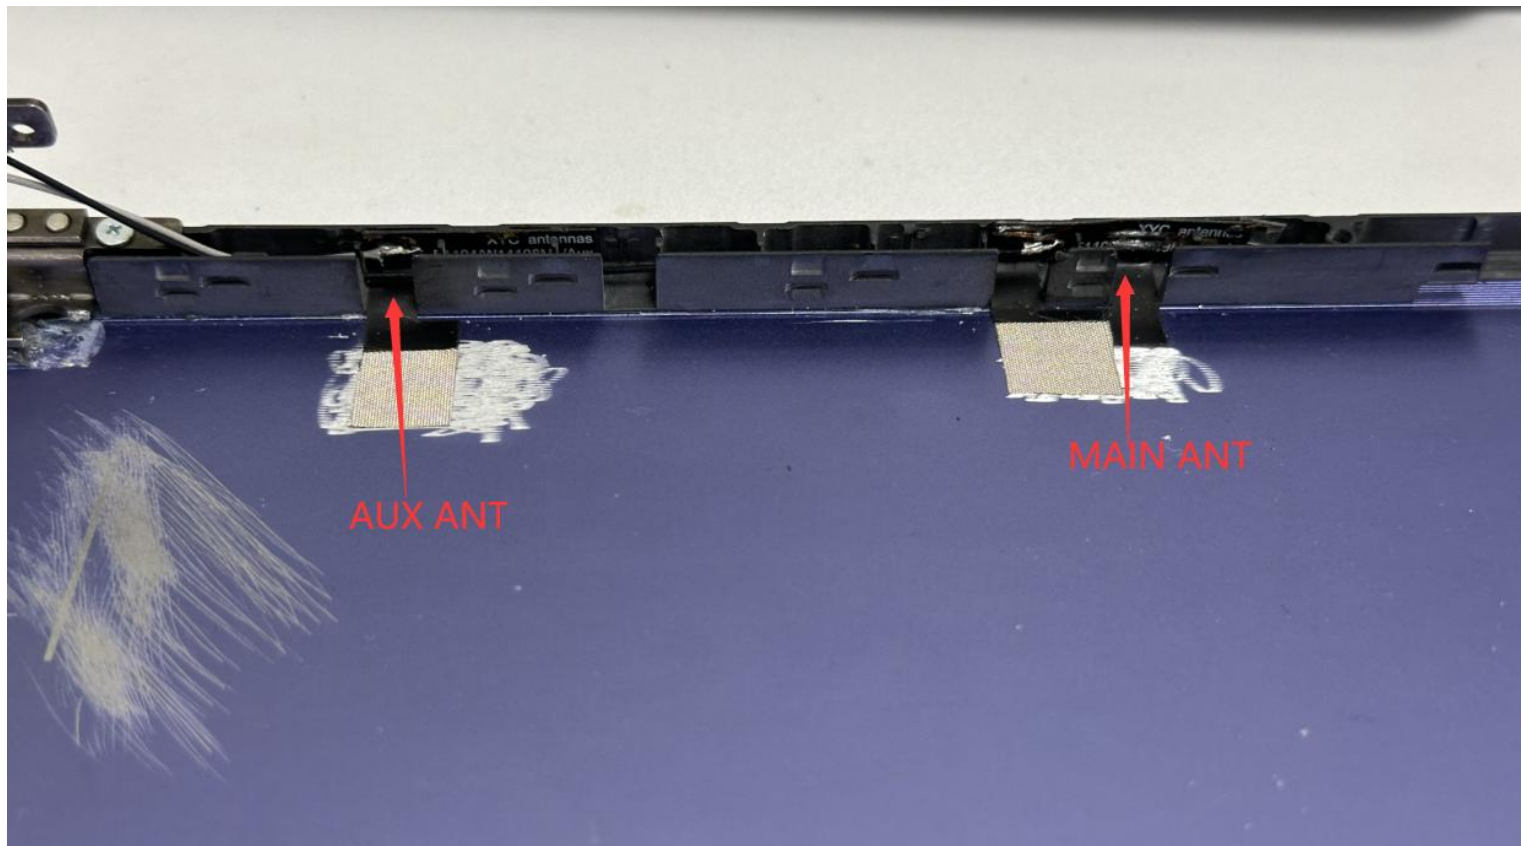




ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

匹配电路
Matching circuit

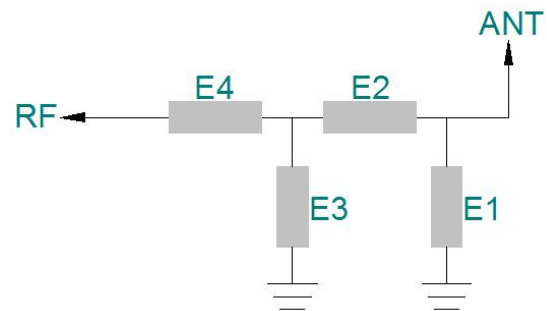

匹配电路原理图&位号图


	电容 (PF)	电感 (NH)
E1(0402)		
E2(0402)		
E3(0402)		
E4(0402)		



无源测试数据

Passive test data

ANT1 S11-VSWR&Return Loss

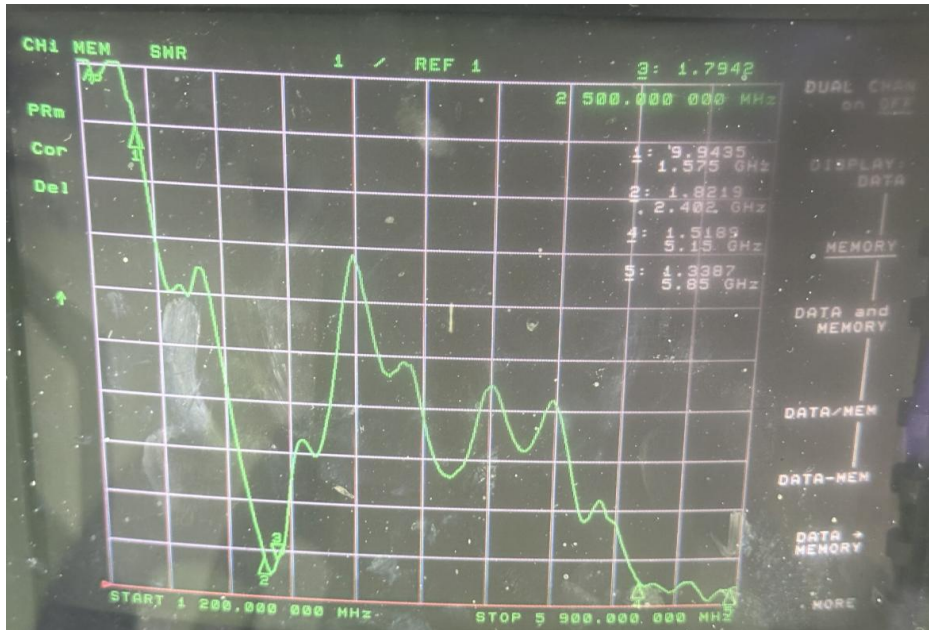

Frequency (MHZ)	2400	2500	5150	5850
VSWR	1.82	1.79	1.51	1.33
Return Loss (DB)	-10.76	-10.95	-13.72	-16.78



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

ANT1 GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)
2400	26.35	-5.79	0.91	-1.24	17.66	8.692	0.91	-21.96
2410	25.51	-5.93	0.6	-1.55	17.063	8.447	0.6	-23.03
2420	27.51	-5.61	1.3	-0.85	18.386	9.121	1.3	-22.11
2430	26.37	-5.79	1.15	-1	17.608	8.758	1.15	-19.91
2440	27.1	-5.67	1.29	-0.86	17.886	9.215	1.29	-17.58
2450	29.17	-5.35	1.38	-0.77	19.066	10.099	1.38	-15.68
2460	28.48	-5.45	1.2	-0.95	18.474	10.01	1.2	-14.74
2470	27	-5.69	0.91	-1.24	17.481	9.518	0.91	-14.67
2480	27.54	-5.6	1.04	-1.11	17.876	9.661	1.04	-15.97
2490	29.18	-5.35	1.06	-1.09	18.718	10.459	1.06	-15.66
2500	24.03	-6.19	-0.06	-2.21	15.294	8.736	-0.06	-15.12



ANTENNA


深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD


无源测试数据
Passive test data

ANT1 Direction of figure(2.4/BT)


2400.000MHz




2400.000MHz H




2450.000MHz




2450.000MHz H




2500.000MHz




2500.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz E1




2450.000MHz E2



2500.000MHz E1



2500.000MHz E2





ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

无源测试数据
Passive test data

ANT1 GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dEd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)
5150	19.23	-7.16	1.94	-0.21	10.59	8.641	1.94	-15.82
5170	22.95	-6.39	2.33	0.18	12.524	10.427	2.33	-14.74
5190	21.96	-6.58	2.05	-0.1	11.632	10.331	2.05	-13.88
5210	27.25	-5.65	2.67	0.52	14.001	13.251	2.67	-14.4
5230	24.8	-6.06	1.93	-0.22	12.676	12.125	1.93	-17.08
5250	29.3	-5.33	2.43	0.28	15.077	14.223	2.43	-16.37
5270	28.95	-5.38	2.18	0.03	14.924	14.029	2.18	-15.02
5290	32.01	-4.95	2.78	0.63	16.401	15.608	2.78	-14.12
5310	29.56	-5.29	2.19	0.04	15.043	14.518	2.19	-14.92
5330	30.42	-5.17	2.06	-0.09	15.494	14.923	2.06	-15.06
5350	31.27	-5.05	2.1	-0.05	15.89	15.382	2.1	-15.33
5370	31.03	-5.08	1.94	-0.21	15.714	15.318	1.94	-16.62
5390	29.12	-5.36	1.72	-0.43	14.84	14.279	1.72	-17.77
5410	34.28	-4.65	2.93	0.78	17.61	16.667	2.93	-17.55
5430	32.81	-4.84	3.18	1.03	17.006	15.807	3.18	-19.79
5450	35.19	-4.54	3.85	1.7	18.51	16.677	3.85	-20.31
5470	34.5	-4.62	4.04	1.89	18.602	15.894	4.04	-21.26
5490	32.92	-4.83	3.83	1.68	18.16	14.756	3.83	-22.94
5510	33.98	-4.69	4.08	1.93	19.033	14.944	4.08	-19.37
5530	33.19	-4.79	4.16	2.01	18.759	14.434	4.16	-17.12
5550	36.61	-4.36	4.62	2.47	20.534	16.077	4.62	-16.34
5570	31.78	-4.98	3.96	1.81	17.639	14.137	3.96	-17.66
5590	33.74	-4.72	3.96	1.81	18.622	15.117	3.96	-18.6
5610	28	-5.53	2.94	0.79	15.438	12.564	2.94	-19.25
5630	33.93	-4.69	3.74	1.59	18.467	15.467	3.74	-22.74
5650	26.45	-5.78	2.57	0.42	14.217	12.234	2.57	-28.14
5670	33.4	-4.76	3.29	1.14	17.705	15.699	3.29	-22.69
5690	26.93	-5.7	2.32	0.17	14.11	12.823	2.32	-18.67
5710	33.28	-4.78	3.51	1.36	17.56	15.718	3.51	-16.45
5730	31.23	-5.05	3.51	1.36	16.569	14.663	3.51	-18.31
5750	31.27	-5.05	3.41	1.26	16.774	14.498	3.41	-20.77
5770	30.86	-5.11	2.97	0.82	16.776	14.087	2.97	-17.28
5790	29.15	-5.35	2.19	0.04	16.077	13.072	2.19	-18.86
5810	27.38	-5.63	1.15	-1	15.276	12.106	1.15	-19.45
5830	25.65	-5.91	1.2	-0.95	14.468	11.18	1.2	-23.86
5850	24.19	-6.16	1.49	-0.66	13.705	10.489	1.49	-25.3



ANTENNA


深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD


无源测试数据
Passive test data

ANT1 Direction of figure(5G)


5150.000MHz




5150.000MHz H




5490.000MHz




5490.000MHz H




5850.000MHz




5850.000MHz H




5150.000MHz E1




5150.000MHz E2




5490.000MHz E1




5490.000MHz E2



5850.000MHz E1



5850.000MHz E2





无源测试数据 Passive test data

ANT2 S11-VSWR&Return Loss



Frequency (MHZ)	2400	2500	5150	5850
VSWR	1.8	1.25	2.01	1.6
Return Loss (DB)	-10.93	-19.06	-9.47	-12.66



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

ANT2 GAIN&Efficiency-WIFI2.4G/BT

Passive Test For WIFI2.4								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)
2400	32.87	-4.83	0.86	-1.29	20.366	12.499	0.86	-20.96
2410	32.25	-4.91	1.01	-1.14	19.934	12.317	1.01	-21.81
2420	31.85	-4.97	1.34	-0.81	19.573	12.28	1.34	-22.77
2430	30.55	-5.15	1.48	-0.67	18.901	11.649	1.48	-23.42
2440	32.76	-4.85	1.96	-0.19	20.09	12.668	1.96	-20.27
2450	34.32	-4.64	2.35	0.2	20.892	13.433	2.35	-17.09
2460	33.77	-4.71	2.28	0.13	20.367	13.407	2.28	-18.5
2470	34.62	-4.61	2.14	-0.01	20.724	13.896	2.14	-18.38
2480	37.3	-4.28	2.04	-0.11	22.097	15.205	2.04	-18.11
2490	40.65	-3.91	1.88	-0.27	23.766	16.881	1.88	-18.78
2500	39.21	-4.07	1.28	-0.87	22.715	16.498	1.28	-20.91



ANTENNA


深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据

Passive test data

ANT2 Direction of figure (2.4/BT)

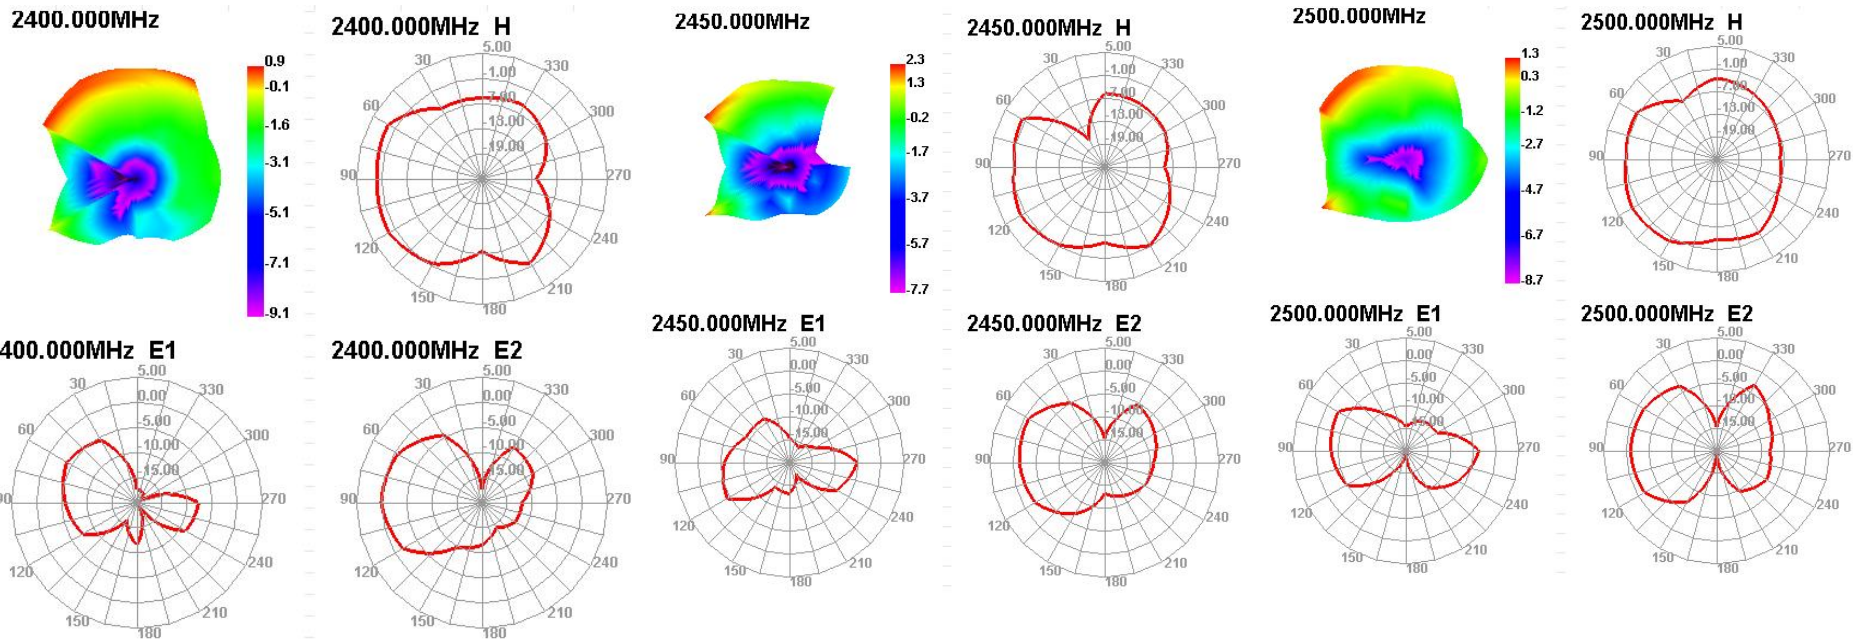



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

无源测试数据

Passive test data

ANT2 GAIN&Efficiency-WIFI 5G

Passive Test For WIFI5G								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dEd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)
5150	14.51	-8.38	-3.41	-5.56	8.03	6.482	-3.41	-20.52
5170	14.01	-8.54	-3.6	-5.75	7.882	6.129	-3.6	-20.5
5190	17.4	-7.6	-2.96	-5.11	9.855	7.542	-2.96	-19.36
5210	17.93	-7.46	-3.04	-5.19	10.097	7.83	-3.04	-19.42
5230	20.81	-6.82	-2.05	-4.2	11.515	9.293	-2.05	-19.76
5250	22.99	-6.38	-1.03	-3.18	12.57	10.42	-1.03	-18.67
5270	27.48	-5.61	0.04	-2.11	14.962	12.517	0.04	-16.67
5290	28.04	-5.52	0.49	-1.66	15.211	12.829	0.49	-15.21
5310	27.89	-5.55	0.98	-1.17	15.085	12.804	0.98	-17.84
5330	28.88	-5.39	1.63	-0.52	15.641	13.234	1.63	-16.5
5350	31.11	-5.07	2.14	-0.01	17.179	13.929	2.14	-15.46
5370	30.57	-5.15	1.91	-0.24	16.985	13.588	1.91	-16.54
5390	28.77	-5.41	1.41	-0.74	15.655	13.112	1.41	-16.99
5410	32.18	-4.92	1.72	-0.43	17.375	14.805	1.72	-16.9
5430	30.77	-5.12	1.19	-0.96	16.911	13.861	1.19	-20.06
5450	31.06	-5.08	0.9	-1.25	17.521	13.541	0.9	-21.51
5470	31.17	-5.06	1.06	-1.09	17.729	13.438	1.06	-24.38
5490	28.86	-5.4	1.17	-0.98	16.332	12.529	1.17	-26.02
5510	30.31	-5.18	1.46	-0.69	17.346	12.961	1.46	-24.16
5530	28.93	-5.39	1.02	-1.13	16.702	12.223	1.02	-24.71
5550	32.34	-4.9	1.52	-0.63	18.575	13.765	1.52	-21.07
5570	26.38	-5.79	1.15	-1	14.846	11.529	1.15	-22.46
5590	27.85	-5.55	1.88	-0.27	15.295	12.551	1.88	-18.45
5610	23.9	-6.22	1.33	-0.82	12.901	11	1.33	-19.24
5630	30.24	-5.19	2.05	-0.1	15.987	14.255	2.05	-18.57
5650	26.81	-5.72	2.11	-0.04	14.038	12.772	2.11	-20.87
5670	28.98	-5.38	3.47	1.32	15.234	13.747	3.47	-25.25
5690	24.59	-6.09	3.14	0.99	12.973	11.616	3.14	-29.23
5710	23.72	-6.25	2.91	0.76	12.573	11.151	2.91	-24.75
5730	24.51	-6.11	3	0.85	13.05	11.465	3	-23.41
5750	20.83	-6.81	2.06	-0.09	11.127	9.701	2.06	-22.13
5770	22.85	-6.41	1.93	-0.22	12.14	10.709	1.93	-19.26
5790	21.24	-6.73	1.07	-1.08	11.193	10.048	1.07	-17.24
5810	23.59	-6.27	0.86	-1.29	12.483	11.111	0.86	-16.8
5830	24.34	-6.14	0.77	-1.38	12.91	11.434	0.77	-17.28
5850	28.1	-5.51	1.4	-0.75	14.701	13.397	1.4	-15.81




ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

无源测试数据
Passive test data

ANT2 Direction of figure(5G)

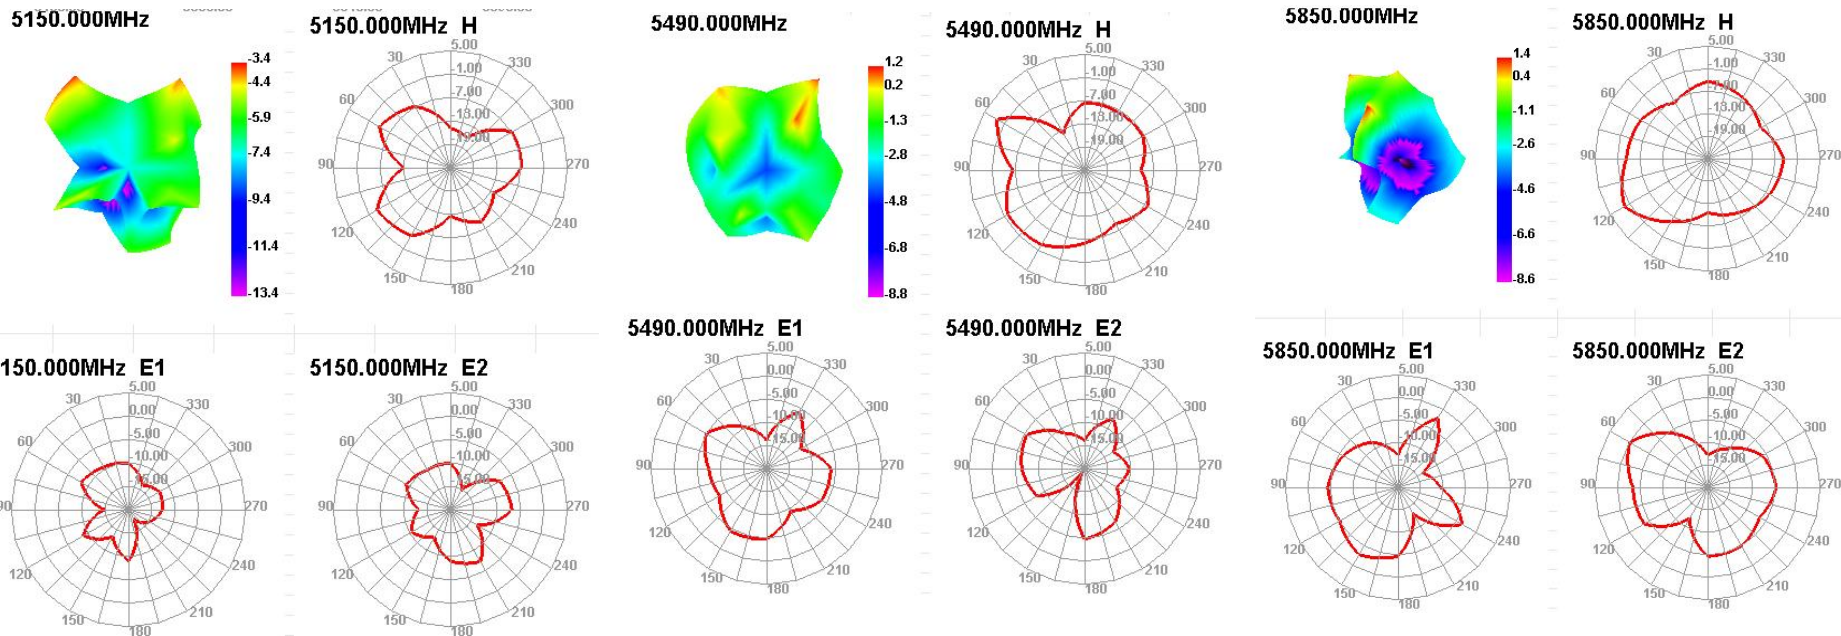



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

有源测试数据
Active test data

802.11b	Frequency	TRP		TIS	
	2412	CH1 11Mbps	8.42	CH1 11Mbps	-78.92
	2437	CH6 11Mbps	10.62	CH6 11Mbps	-80.14
	2467	CH11 11Mbps	10.24	CH11 11Mbps	-80.06
802.11a		TRP		TIS	
	5180	CH36 6Mbps	10.06	CH36 54Mbps	-69.56
	5300	CH60 6Mbps	10.9	CH60 54Mbps	-69.28
	5805	CH161 6Mbps	8.92	CH161 54Mbps	-67.67



吞吐量测试 Throughput test

2.4G wifi 天吐量测试									
上行		276M		下行		286M			
图片	[384]	Interval	Transfer	Bandwidth	图片	[272]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth		[272]	Interval	Transfer	Bandwidth
	[384]	8.0- 9.0 sec	27.2 MBytes	228 Mbits/sec		[272]	18.0-19.0 sec	38.0 MBytes	319 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	9.0-10.0 sec	32.2 MBytes	270 Mbits/sec		[272]	19.0-20.0 sec	34.3 MBytes	288 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	10.0-11.0 sec	38.0 MBytes	319 Mbits/sec		[272]	20.0-21.0 sec	36.6 MBytes	307 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	11.0-12.0 sec	33.2 MBytes	279 Mbits/sec		[272]	21.0-22.0 sec	36.5 MBytes	306 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	12.0-13.0 sec	33.2 MBytes	279 Mbits/sec		[272]	22.0-23.0 sec	36.2 MBytes	304 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	13.0-14.0 sec	38.7 MBytes	324 Mbits/sec		[272]	23.0-24.0 sec	37.1 MBytes	311 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
	[384]	14.0-15.0 sec	36.1 MBytes	303 Mbits/sec		[272]	24.0-25.0 sec	37.2 MBytes	312 Mbits/sec
	[ID]	Interval	Transfer	Bandwidth		[ID]	Interval	Transfer	Bandwidth
[384]	15.0-16.0 sec	37.0 MBytes	310 Mbits/sec	[272]	25.0-26.0 sec	37.8 MBytes	317 Mbits/sec		
[ID]	Interval	Transfer	Bandwidth	[ID]	Interval	Transfer	Bandwidth		
[384]	16.0-17.0 sec	32.5 MBytes	273 Mbits/sec	[272]	26.0-27.0 sec	34.0 MBytes	286 Mbits/sec		
[ID]	Interval	Transfer	Bandwidth	[ID]	Interval	Transfer	Bandwidth		
[384]	17.0-18.0 sec	34.0 MBytes	285 Mbits/sec	[272]	27.0-28.0 sec	36.1 MBytes	303 Mbits/sec		
[ID]	Interval	Transfer	Bandwidth	[ID]	Interval	Transfer	Bandwidth		
[384]	18.0-19.0 sec	29.7 MBytes	249 Mbits/sec	[272]	28.0-29.0 sec	37.3 MBytes	313 Mbits/sec		
[ID]	Interval	Transfer	Bandwidth	[ID]	Interval	Transfer	Bandwidth		
[384]	19.0-20.0 sec	22.2 MBytes	186 Mbits/sec	[272]	29.0-30.0 sec	36.0 MBytes	302 Mbits/sec		
[ID]	Interval	Transfer	Bandwidth	[ID]	Interval	Transfer	Bandwidth		
[384]	0.0-20.0 sec	658 MBytes	276 Mbits/sec	[272]	0.0-30.0 sec	1021 MBytes	286 Mbits/sec		
备注									



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO.,LTD

吞吐量测试

Throughput test

5G wifi 天吐量测试								
上行		742M		下行		834M		
图片	[ID]	Interval	Transfer	Bandwidth	[272]	17.0-18.0 sec	88.0 MBytes 739 Mbits/sec	
	[388]	17.0-18.0 sec	88.9 MBytes	746 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	18.0-19.0 sec	104 MBytes 876 Mbits/sec	
	[388]	18.0-19.0 sec	91.6 MBytes	768 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	19.0-20.0 sec	91.6 MBytes 769 Mbits/sec	
	[388]	19.0-20.0 sec	89.4 MBytes	750 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	20.0-21.0 sec	98.0 MBytes 822 Mbits/sec	
	[388]	20.0-21.0 sec	88.8 MBytes	745 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	21.0-22.0 sec	99.5 MBytes 835 Mbits/sec	
	[388]	21.0-22.0 sec	85.5 MBytes	717 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	22.0-23.0 sec	107 MBytes 894 Mbits/sec	
	[388]	22.0-23.0 sec	92.2 MBytes	773 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	23.0-24.0 sec	106 MBytes 885 Mbits/sec	
	[388]	23.0-24.0 sec	87.3 MBytes	732 Mbits/sec	ID]	Interval	Transfer	Bandwidth
	[ID]	Interval	Transfer	Bandwidth	[272]	24.0-25.0 sec	107 MBytes 894 Mbits/sec	
[388]	24.0-25.0 sec	89.3 MBytes	749 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	25.0-26.0 sec	105 MBytes 880 Mbits/sec		
[388]	25.0-26.0 sec	88.4 MBytes	741 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	26.0-27.0 sec	86.9 MBytes 729 Mbits/sec		
[388]	26.0-27.0 sec	89.1 MBytes	748 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	27.0-28.0 sec	106 MBytes 890 Mbits/sec		
[388]	27.0-28.0 sec	89.8 MBytes	753 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	28.0-29.0 sec	105 MBytes 881 Mbits/sec		
[388]	28.0-29.0 sec	86.8 MBytes	728 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	29.0-30.0 sec	101 MBytes 847 Mbits/sec		
[388]	29.0-30.0 sec	90.8 MBytes	761 Mbits/sec	ID]	Interval	Transfer	Bandwidth	
[ID]	Interval	Transfer	Bandwidth	[272]	0.0-30.0 sec	2.91 GBytes 834 Mbits/sec		
[388]	0.0-30.0 sec	2.59 GBytes	742 Mbits/sec					
备注								



ANTENNA

深圳市星源创科技有限公司

SHENZHEN Xingyuanchuang TECHNOLOGY CO., LTD

BT天线实测 BT Antenna test

测试环境：开放空间(通道)


测试工具：蓝牙音响

测试距离：10/m

结果：播放音乐流畅，无杂音。

环境处理

Environmental treatment

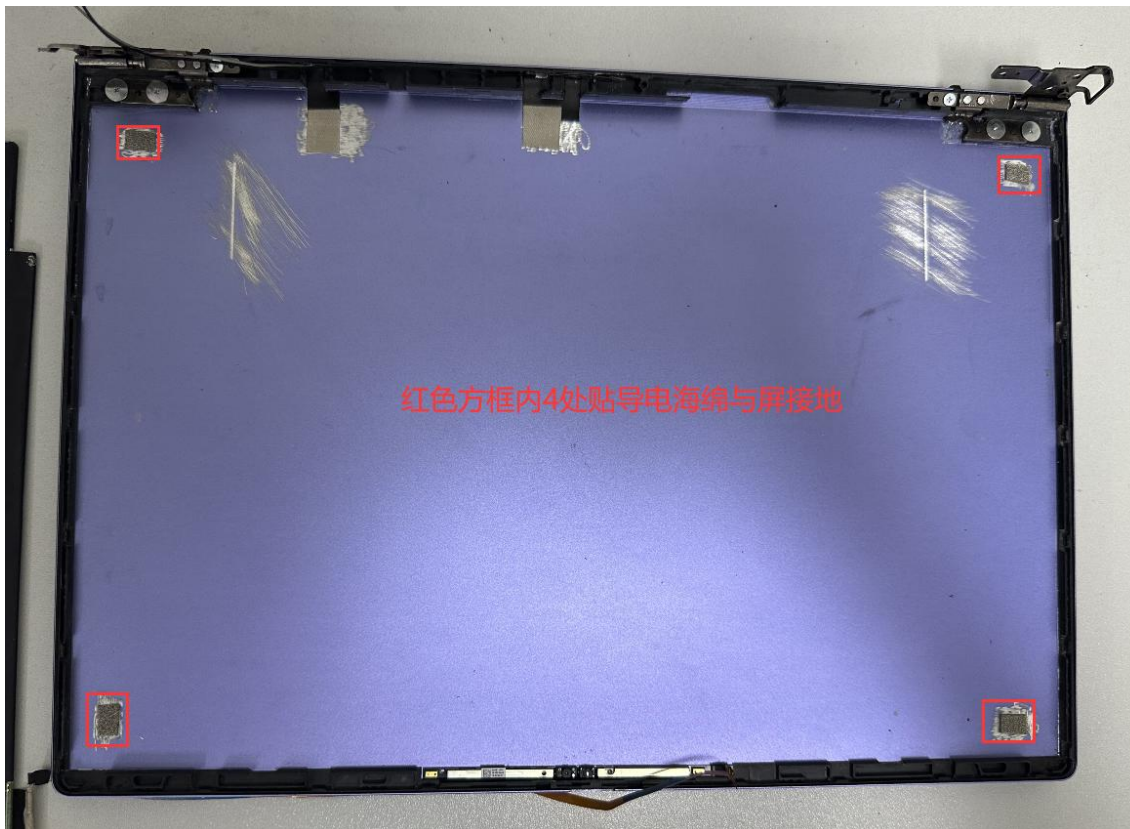

环境处理

Environmental treatment



合作共赢

