

## RF Test Report

Applicant : D-Link Corporation

Product Name : AX900 Wi-Fi 6 USB Adapter  
Wi-Fi 6 AX900 USB 2.0 Dongle

Trade Name : D-Link

Model Number : AX9U

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Received Date : Aug. 23, 2024

Test Period : Sep. 19, 2024 ~ Sep. 30, 2024

Issued Date : Nov. 19, 2024

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Frequency Range: 9 kHz to 325 GHz

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

| Rev. | Issued Date   | Description   | Revised By |
|------|---------------|---------------|------------|
| 00   | Nov. 19, 2024 | Initial Issue | Snow Wang  |
|      |               |               |            |
|      |               |               |            |
|      |               |               |            |

## Verification of Compliance

Applicant : D-Link Corporation

Product Name : AX900 Wi-Fi 6 USB Adapter  
Wi-Fi 6 AX900 USB 2.0 Dongle

Trade Name : D-Link

Model Number : AX9U

FCC ID : KA2AX9UA1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

|          |                                                 |           |
|----------|-------------------------------------------------|-----------|
| <b>1</b> | <b>General Information.....</b>                 | <b>5</b>  |
| 1.1.     | Summary of Test Result.....                     | 5         |
| 1.2.     | Testing Location.....                           | 6         |
| 1.3.     | Measurement Uncertainty.....                    | 6         |
| 1.4.     | Test Site Environment.....                      | 6         |
| <b>2</b> | <b>EUT Description.....</b>                     | <b>7</b>  |
| <b>3</b> | <b>Test Methodology.....</b>                    | <b>12</b> |
| 3.1.     | Mode of Operation.....                          | 12        |
| 3.2.     | EUT Test Step.....                              | 15        |
| 3.3.     | Configuration of Test System Details.....       | 16        |
| 3.4.     | Test Instruments.....                           | 17        |
| <b>4</b> | <b>Measurement Procedure.....</b>               | <b>19</b> |
| 4.1.     | AC Power Conducted Emission Measurement.....    | 19        |
| 4.2.     | Transmitter Radiated Emissions Measurement..... | 21        |
| 4.3.     | Maximum Conducted Output Power Measurement..... | 26        |
| 4.4.     | 26 dB RF Bandwidth Measurement.....             | 27        |
| 4.5.     | 6 dB RF Bandwidth Measurement.....              | 28        |
| 4.6.     | Maximum Power Spectral Density Measurement..... | 29        |
| 4.7.     | Automatically discontinue transmission.....     | 31        |
| 4.8.     | Antenna Requirement.....                        | 32        |
| <b>5</b> | <b>Test Results.....</b>                        | <b>33</b> |
| 5.1.     | Conducted Emission.....                         | 33        |
| 5.2.     | Radiated Emission Measurement.....              | 35        |
| 5.3.     | Conducted Test Results.....                     | 295       |

**Appendix A. Test Data**

**Appendix B. Test Plots**

**Appendix C. Test Setup Photographs**

# 1 General Information

## 1.1. Summary of Test Result

| Standard                     | Item                                   | Result    | Remark |
|------------------------------|----------------------------------------|-----------|--------|
| 15.407(b)(9)<br>15.207       | AC Power Conducted Emission            | PASS      | ---    |
| 15.407(b)<br>15.205 / 15.209 | Transmitter Radiated Emissions         | PASS      | ---    |
| 15.407(a)                    | Maximum Conducted Output Power         | PASS      | ---    |
| 15.407(a)                    | 26 dB RF Bandwidth                     | Reference | ---    |
| 15.407(e)                    | 6 dB RF Bandwidth                      | PASS      | ---    |
| 15.407(a)                    | Maximum Power Spectral Density         | PASS      | ---    |
| 15.407(c)                    | Automatically discontinue transmission | PASS      | ---    |
| 15.407(a)<br>15.203          | Antenna Requirement                    | PASS      | ---    |

### Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

| Standard                  | Description                                                                                                            |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| CFR47, Part 15, Subpart C | Intentional Radiators                                                                                                  |
| CFR47, Part 15, Subpart E | Unlicensed National Information Infrastructure Devices                                                                 |
| ANSI C63. 10: 2013        | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices                         |
| KDB789033: D02            | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E |
| KDB 662911 D01 v02r01     | Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)              |

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
 Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)  
 Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Measurement Uncertainty

| Test Item              | Frequency             | Uncertainty |          |          |          |          |
|------------------------|-----------------------|-------------|----------|----------|----------|----------|
|                        |                       | BD          |          | WG       |          |          |
| Conducted Emission     | 150 kHz ~ 30 MHz      | 2.7 dB      |          | 2.6 dB   |          |          |
| Conducted Output Power |                       | 1.1 dB      |          | 1.1 dB   |          |          |
| RF Bandwidth           |                       | 4.4 %       |          | 4.4 %    |          |          |
| Power Spectral Density |                       | 1.1 dB      |          | 1.1 dB   |          |          |
| Duty Cycle             |                       | 0.3 %       |          | 0.3 %    |          |          |
| Time Occupancy         |                       | 0.2 %       |          | 0.1 %    |          |          |
| Test Item              | Frequency             | Uncertainty |          |          |          |          |
|                        |                       | 96601-BD    | 96603-BD | 96602-WG | 96603-WG | 96604-WG |
| Radiated Emission      | 9 kHz ~ 30 MHz        | 1.8 dB      | 1.8 dB   | 1.9 dB   | 1.9 dB   | 1.9 dB   |
|                        | 30 MHz ~ 1000 MHz     | 4.7 dB      | 4.7 dB   | 4.7 dB   | 4.7 dB   | 4.5 dB   |
|                        | 1000 MHz ~ 18000 MHz  | 4.7 dB      | 4.8 dB   | 4.6 dB   | 4.7 dB   | 5.1 dB   |
|                        | 18000 MHz ~ 26500 MHz | 4.0 dB      | 4.1 dB   | 3.9 dB   | 4.1 dB   | 4.3 dB   |
|                        | 26500 MHz ~ 40000 MHz | 4.2 dB      | 4.2 dB   | 4.2 dB   | 4.2 dB   | 4.6 dB   |

## 1.4. Test Site Environment

| Items            | Required (IEC 60068-1) | Interval(*) |
|------------------|------------------------|-------------|
| Temperature (°C) | 15-35                  | 20-30       |
| Humidity (%RH)   | 25-75                  | 45-75       |

(\*)The measurement ambient temperature is within this range.

## 2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity(except Max. RF Output Power).

|                                        |                                                                                         |                |                       |
|----------------------------------------|-----------------------------------------------------------------------------------------|----------------|-----------------------|
| Applicant                              | D-Link Corporation<br>14420 Myford Road Suite 100 Irvine California United States 92606 |                |                       |
| Product Name                           | AX900 Wi-Fi 6 USB Adapter<br>Wi-Fi 6 AX900 USB 2.0 Dongle                               |                |                       |
| Difference description of product name | No physical difference. Just for marketing purpose.                                     |                |                       |
| Trade Name                             | D-Link                                                                                  |                |                       |
| Model Number                           | AX9U                                                                                    |                |                       |
| FCC ID                                 | KA2AX9UA1                                                                               |                |                       |
| Operate Frequency                      | Frequency Band                                                                          |                | Frequency Range (MHz) |
|                                        | 802.11a                                                                                 | U-NII Band 1   | 5180 – 5240           |
|                                        |                                                                                         | U-NII Band 2-A | 5260 – 5320           |
|                                        |                                                                                         | U-NII Band 2-C | 5500 – 5700           |
|                                        |                                                                                         | U-NII Band 3   | 5745 – 5825           |
|                                        | 802.11n HT20 /<br>802.11ac VHT20/<br>802.11ax HE20                                      | U-NII Band 1   | 5180 – 5240           |
|                                        |                                                                                         | U-NII Band 2-A | 5260 – 5320           |
|                                        |                                                                                         | U-NII Band 2-C | 5500 – 5700           |
|                                        |                                                                                         | U-NII Band 3   | 5745 – 5825           |
|                                        | 802.11n HT40 /<br>802.11ac VHT40/<br>802.11ax HE40                                      | U-NII Band 1   | 5190 – 5230           |
|                                        |                                                                                         | U-NII Band 2-A | 5270 – 5310           |
|                                        |                                                                                         | U-NII Band 2-C | 5510 – 5670           |
|                                        |                                                                                         | U-NII Band 3   | 5755 – 5795           |
|                                        | 802.11ac VHT80/<br>802.11ax HE80                                                        | U-NII Band 1   | 5210                  |
|                                        |                                                                                         | U-NII Band 2-A | 5290                  |
|                                        |                                                                                         | U-NII Band 2-C | 5530 – 5610           |
|                                        |                                                                                         | U-NII Band 3   | 5775                  |
| Modulation Type                        | OFDM/OFDMA                                                                              |                |                       |

| Antenna information | Antenna               | Type          | Max. Gain (dBi) |     |
|---------------------|-----------------------|---------------|-----------------|-----|
|                     | ANT-0                 | Metal Antenna | U-NII Band 1    | 2.2 |
|                     |                       |               | U-NII Band 2-A  | 2.2 |
|                     |                       |               | U-NII Band 2-C  | 2.6 |
|                     |                       |               | U-NII Band 3    | 2.6 |
| Antenna Delivery    | Reference section 3.1 |               |                 |     |
| Operate Temp. Range | 0 ~ +40 °C            |               |                 |     |
| EUT Power Rating    | 5 Vdc                 |               |                 |     |

| Frequency Band |                | Max. RF Output Power (W) |
|----------------|----------------|--------------------------|
| 802.11a        | U-NII Band 1   | 0.035                    |
|                | U-NII Band 2-A | 0.034                    |
|                | U-NII Band 2-C | 0.028                    |
|                | U-NII Band 3   | 0.028                    |
| 802.11n HT20   | U-NII Band 1   | 0.034                    |
|                | U-NII Band 2-A | 0.033                    |
|                | U-NII Band 2-C | 0.026                    |
|                | U-NII Band 3   | 0.026                    |
| 802.11n HT40   | U-NII Band 1   | 0.034                    |
|                | U-NII Band 2-A | 0.033                    |
|                | U-NII Band 2-C | 0.026                    |
|                | U-NII Band 3   | 0.027                    |
| 802.11ac VHT20 | U-NII Band 1   | 0.034                    |
|                | U-NII Band 2-A | 0.033                    |
|                | U-NII Band 2-C | 0.026                    |
|                | U-NII Band 3   | 0.027                    |
| 802.11ac VHT40 | U-NII Band 1   | 0.035                    |
|                | U-NII Band 2-A | 0.034                    |
|                | U-NII Band 2-C | 0.027                    |
|                | U-NII Band 3   | 0.027                    |
| 802.11ac VHT80 | U-NII Band 1   | 0.035                    |
|                | U-NII Band 2-A | 0.035                    |
|                | U-NII Band 2-C | 0.028                    |
|                | U-NII Band 3   | 0.035                    |
| 802.11ax HE20  | U-NII Band 1   | 0.035                    |
|                | U-NII Band 2-A | 0.035                    |
|                | U-NII Band 2-C | 0.026                    |
|                | U-NII Band 3   | 0.028                    |
| 802.11ax HE40  | U-NII Band 1   | 0.035                    |
|                | U-NII Band 2-A | 0.035                    |
|                | U-NII Band 2-C | 0.027                    |
|                | U-NII Band 3   | 0.028                    |
| 802.11ax HE80  | U-NII Band 1   | 0.033                    |
|                | U-NII Band 2-A | 0.034                    |
|                | U-NII Band 2-C | 0.028                    |
|                | U-NII Band 3   | 0.027                    |

| Equipment Type                     |                     |     |
|------------------------------------|---------------------|-----|
| Outdoor access point               | point-to-point      | --- |
|                                    | point-to-multipoint | --- |
| Indoor access point                |                     | --- |
| Fixed point-to-point access points |                     | --- |
| Client devices                     |                     | V   |

5150 MHz ~5250 MHz(UNII-1):

|        |             |      |      |      |      |
|--------|-------------|------|------|------|------|
| BW 20M | CH          | 36   | 40   | 44   | 48   |
|        | Freq. (MHz) | 5180 | 5200 | 5220 | 5240 |
| BW 40M | CH          | 38   |      | 46   |      |
|        | Freq. (MHz) | 5190 |      | 5230 |      |
| BW 80M | CH          | 42   |      |      |      |
|        | Freq. (MHz) | 5210 |      |      |      |

5250 MHz ~5350 MHz(UNII-2A):

|        |             |      |      |      |      |
|--------|-------------|------|------|------|------|
| BW 20M | CH          | 52   | 56   | 60   | 64   |
|        | Freq. (MHz) | 5260 | 5280 | 5300 | 5320 |
| BW 40M | CH          | 54   |      | 62   |      |
|        | Freq. (MHz) | 5270 |      | 5310 |      |
| BW 80M | CH          | 58   |      |      |      |
|        | Freq. (MHz) | 5290 |      |      |      |

5470 MHz ~5725 MHz(UNII-2C):

|        |             |      |      |      |      |      |      |      |      |      |      |      |    |
|--------|-------------|------|------|------|------|------|------|------|------|------|------|------|----|
| BW 20M | CH          | 100  | 104  | 108  | 112  | 116  | 120  | 124  | 128  | 132  | 136  | 140  | NA |
|        | Freq. (MHz) | 5500 | 5520 | 5540 | 5560 | 5580 | 5600 | 5620 | 5640 | 5660 | 5680 | 5700 | NA |
| BW 40M | CH          | 102  |      | 110  |      | 118  |      | 126  |      | 134  |      | NA   |    |
|        | Freq. (MHz) | 5510 |      | 5550 |      | 5590 |      | 5630 |      | 5670 |      | NA   |    |
| BW 80M | CH          | 106  |      |      |      | 122  |      |      |      | NA   |      |      |    |
|        | Freq. (MHz) | 5530 |      |      |      | 5610 |      |      |      | NA   |      |      |    |

5725 MHz ~5850 MHz(UNII-3):

|        |             |      |      |      |      |      |  |
|--------|-------------|------|------|------|------|------|--|
| BW 20M | CH          | 149  | 153  | 157  | 161  | 165  |  |
|        | Freq. (MHz) | 5745 | 5765 | 5785 | 5805 | 5825 |  |
| BW 40M | CH          | 151  |      | 159  |      | NA   |  |
|        | Freq. (MHz) | 5755 |      | 5795 |      |      |  |
| BW 80M | CH          | 155  |      |      |      |      |  |
|        | Freq. (MHz) | 5775 |      |      |      |      |  |

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Pre-Test Mode  | Final-Test Mode |
|----------------|-----------------|
| Transmit Mode  | V               |
| 802.11a        | V               |
| 802.11n HT20   |                 |
| 802.11n HT40   |                 |
| 802.11ac VHT20 | V               |
| 802.11ac VHT40 | V               |
| 802.11ac VHT80 | V               |
| 802.11ax HE20  | V               |
| 802.11ax HE40  | V               |
| 802.11ax HE80  | V               |

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note 1: Investigation has been done on all the possible configurations for searching the worst cases (VHT20/VHT40 covers HT20/HT40). The table is a list of the test modes show in this test report.

Note 2: 802.11 ax only support full RU.

| Test Mode      | ANT-0 |
|----------------|-------|
| 802.11a        | V     |
| 802.11n HT20   | V     |
| 802.11n HT40   | V     |
| 802.11ac VHT20 | V     |
| 802.11ac VHT40 | V     |
| 802.11ac VHT80 | V     |
| 802.11ax HE20  | V     |
| 802.11ax HE40  | V     |
| 802.11ax HE80  | V     |

| Test Mode      | Antenna Delivery | Data Rate (Mbps) | Band           | Test Channel  |
|----------------|------------------|------------------|----------------|---------------|
| 802.11a        | 1TX              | 6                | U-NII Band 1   | 36, 40, 48    |
|                |                  |                  | U-NII Band 2-A | 52, 56, 64    |
|                |                  |                  | U-NII Band 2-C | 100, 112, 140 |
|                |                  |                  | U-NII Band 3   | 149, 157, 165 |
| 802.11n HT20   | 1TX              | MCS 0            | U-NII Band 1   | 36, 40, 48    |
|                |                  |                  | U-NII Band 2-A | 52, 56, 64    |
|                |                  |                  | U-NII Band 2-C | 100, 112, 140 |
|                |                  |                  | U-NII Band 3   | 149, 157, 165 |
| 802.11n HT40   | 1TX              | MCS 0            | U-NII Band 1   | 38, 46        |
|                |                  |                  | U-NII Band 2-A | 54, 62        |
|                |                  |                  | U-NII Band 2-C | 102, 110, 134 |
|                |                  |                  | U-NII Band 3   | 151,159       |
| 802.11ac VHT20 | 1TX              | MCS 0            | U-NII Band 1   | 36, 40, 48    |
|                |                  |                  | U-NII Band 2-A | 52, 56, 64    |
|                |                  |                  | U-NII Band 2-C | 100, 112, 140 |
|                |                  |                  | U-NII Band 3   | 149, 157, 165 |
| 802.11ac VHT40 | 1TX              | MCS 0            | U-NII Band 1   | 38, 46        |
|                |                  |                  | U-NII Band 2-A | 54, 62        |
|                |                  |                  | U-NII Band 2-C | 102, 110, 134 |
|                |                  |                  | U-NII Band 3   | 151,159       |
| 802.11ac VHT80 | 1TX              | MCS 0            | U-NII Band 1   | 42            |
|                |                  |                  | U-NII Band 2-A | 58            |
|                |                  |                  | U-NII Band 2-C | 106, 122      |
|                |                  |                  | U-NII Band 3   | 155           |
| 802.11ax HE20  | 1TX              | MCS 0            | U-NII Band 1   | 36, 40, 48    |
|                |                  |                  | U-NII Band 2-A | 52, 56, 64    |
|                |                  |                  | U-NII Band 2-C | 100, 112, 140 |
|                |                  |                  | U-NII Band 3   | 149, 157, 165 |
| 802.11ax HE40  | 1TX              | MCS 0            | U-NII Band 1   | 38, 46        |
|                |                  |                  | U-NII Band 2-A | 54, 62        |
|                |                  |                  | U-NII Band 2-C | 102, 110, 134 |
|                |                  |                  | U-NII Band 3   | 151,159       |
| 802.11ax HE80  | 1TX              | MCS 0            | U-NII Band 1   | 42            |
|                |                  |                  | U-NII Band 2-A | 58            |
|                |                  |                  | U-NII Band 2-C | 106, 122      |
|                |                  |                  | U-NII Band 3   | 155           |


### 3.2. EUT Test Step

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement. According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


|    |                                                                |
|----|----------------------------------------------------------------|
| 1. | Setup the EUT shown on "Configuration of Test System Details". |
| 2. | Turn on the power of all equipment.                            |
| 3. | Turn on TX function.                                           |
| 4. | EUT run test program.                                          |

### 3.3. Configuration of Test System Details

Radiated Emissions (above 1 GHz & below 1GHz)

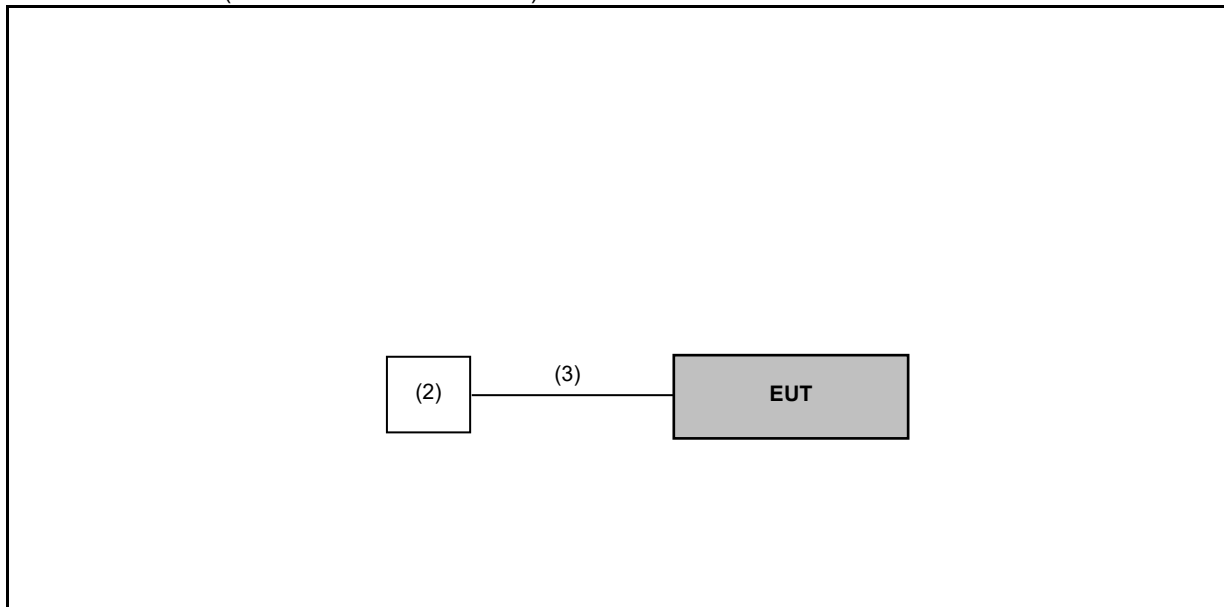

Conduction Emission

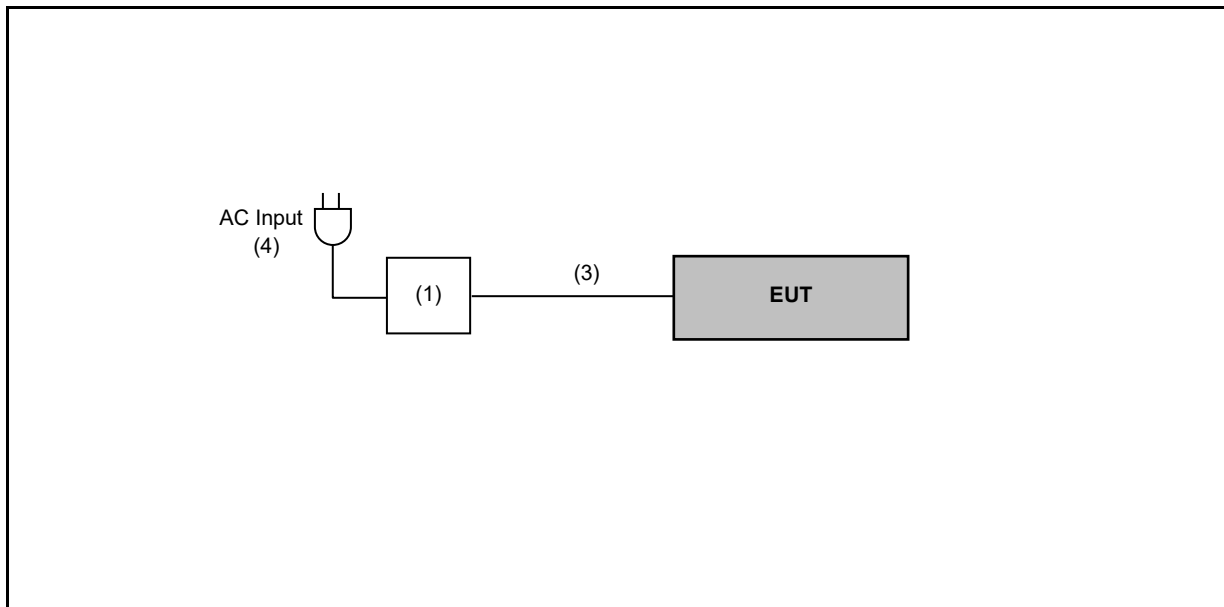

|     | Product    | Manufacturer | Model Number  | Serial Number | Power Cord |
|-----|------------|--------------|---------------|---------------|------------|
| (1) | Notebook   | DELL         | Latitude 5420 | ---           | ---        |
| (2) | Notebook   | ASUS         | TP00120F2     | ---           | ---        |
| (3) | USB Cable  | SCONLINE     | imax-USB-3.0B | ---           | ---        |
| (4) | AC adapter | DELL         | HA65NM190     | ---           | V          |

### 3.4. Test Instruments

For Conducted

Test Period: Sep. 19, 2024 ~ Sep. 30, 2024

Testing Engineer: Joanne Tian

| Test Site                           |                                       | RF03-WG      |              |               |               |             |
|-------------------------------------|---------------------------------------|--------------|--------------|---------------|---------------|-------------|
| Use                                 | Equipment                             | Manufacturer | Model Number | Serial Number | Cal. Date     | Cal. Period |
| <input checked="" type="checkbox"/> | Switch Box                            | R&S          | OSP-B157W8   | 100850        | Dec. 11, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Spectrum Analyzer<br>(10 Hz~26.5 GHz) | Keysight     | N9010B       | MY64020105    | Jan. 26, 2024 | 1 year      |

For Radiated Emissions

Test Period: Sep. 20, 2024 ~ Sep. 25, 2024

Testing Engineer: Marin Lee

| Radiation test sites                |                                            | Semi Anechoic Room 96602-WG    |                          |               |               |             |
|-------------------------------------|--------------------------------------------|--------------------------------|--------------------------|---------------|---------------|-------------|
| Use                                 | Equipment                                  | Manufacturer                   | Model Number             | Serial Number | Cal. Date     | Cal. Period |
| <input checked="" type="checkbox"/> | LOOP Antenna<br>(9 kHz~30 MHz)             | Schwarzbeck<br>Mess-Elektronik | FMZB 1513-60             | 1513-60-031   | Feb. 23, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Trilog Broadband Antenna<br>(30 MHz~1 GHz) | Schwarzbeck<br>Mess-Elektronik | VULB9168                 | 01276         | Feb. 02, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Broadband Horn Antenna<br>(1 GHz~18 GHz)   | RF SPIN                        | DRH18-E                  | 210305A18ES   | Feb. 22, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Broadband Horn Antenna<br>(15 GHz~40 GHz)  | Schwarzbeck<br>Mess-Elektronik | BBHA9170                 | 01133         | Jan. 18, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Spectrum Analyzer<br>(10 Hz~44 GHz)        | KEYSIGHT                       | N9020B                   | MY60112362    | Jan. 29, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Pre-Amplifier                              | Agilent                        | 8447D                    | 2944A10961    | Jul. 9, 2024  | 1 year      |
| <input checked="" type="checkbox"/> | Pre-Amplifier                              | EMCI                           | EMC118A45SE              | 980822        | Nov. 29, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Pre-Amplifier                              | EMCI                           | EMC184045SE              | 980861        | Dec. 21, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(9 kHz~1000 MHz)          | EMCI                           | EMCCFD400-NM-<br>NM-2000 | 211006        | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(9 kHz~1000 MHz)          | EMCI                           | EMCCFD400-NM-<br>NM-2000 | 211007        | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(9 kHz~1000 MHz)          | EMCI                           | EMCCFD400-NM-<br>NM-6000 | 211015        | Nov. 13, 2023 | 1 year      |

Note: N.C.R. = No Calibration Request

For Radiated Emissions  
Test Period: Sep. 20, 2024 ~ Sep. 25, 2024  
Testing Engineer: Marin Lee

| Radiation test sites                |                                  | Semi Anechoic Room 96602-WG |                    |               |               |             |
|-------------------------------------|----------------------------------|-----------------------------|--------------------|---------------|---------------|-------------|
| Use                                 | Equipment                        | Manufacturer                | Model Number       | Serial Number | Cal. Date     | Cal. Period |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(1 GHz~18 GHz)  | EMCI                        | EMC104-SM-SM-1000  | 211026        | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(1 GHz~18 GHz)  | EMCI                        | EMC104-SM-SM-2000  | 211035        | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(1 GHz~18 GHz)  | EMCI                        | EMC104-SM-SM-8000  | 211036        | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(18 GHz~40 GHz) | EMCI                        | EMC101G-KM-KM-600  | 211211        | Jan. 16, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(18 GHz~40 GHz) | EMCI                        | EMC101G-KM-KM-2000 | 211210        | Jan. 16, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Coaxial Cable<br>(18 GHz~40 GHz) | EMCI                        | EMC101G-KM-KM-6000 | 211209        | Jan. 16, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Highpass Filter                  | Warison                     | WFIL-H3000-20000F  | WR4BBFWC2B1   | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Highpass Filter                  | Warison                     | WFIL-H8000-26000F  | 001           | Nov. 13, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | Software                         | R_RAM                       | V1.3               | N/A           | N.C.R.        | ---         |

For Conduction Emissions  
Test Period: Sep. 25, 2024  
Testing Engineer: Marin Lee

| Radiation test sites                |               | Conducted Emission Measurement Conduction01-WG |                      |               |              |             |
|-------------------------------------|---------------|------------------------------------------------|----------------------|---------------|--------------|-------------|
| Use                                 | Equipment     | Manufacturer                                   | Model Number         | Serial Number | Cal. Date    | Cal. Period |
| <input checked="" type="checkbox"/> | Test Receiver | R&S                                            | ESR3                 | 102919        | Nov 30, 2023 | 1 year      |
| <input checked="" type="checkbox"/> | LISN          | R&S                                            | ENV216               | 101041        | Apr 8, 2024  | 1 year      |
| <input checked="" type="checkbox"/> | Cable         | EMCI                                           | EMCCFD300-BM-NM-4000 | 220402        | Jun 12, 2024 | 1 year      |
| <input checked="" type="checkbox"/> | Software      | ELEKTRA                                        | 94.50.4              | N.A.          | N.C.R.       | N.C.R.      |

Note: N.C.R. = No Calibration Request


## 4 Measurement Procedure

### 4.1. AC Power Conducted Emission Measurement

#### ■ Limit

| Frequency (MHz) | Quasi-peak | Average  |
|-----------------|------------|----------|
| 0.15 - 0.5      | 66 to 56   | 56 to 46 |
| 0.50 - 5.0      | 56         | 46       |
| 5.0 - 30.0      | 60         | 50       |

#### ■ Test Setup

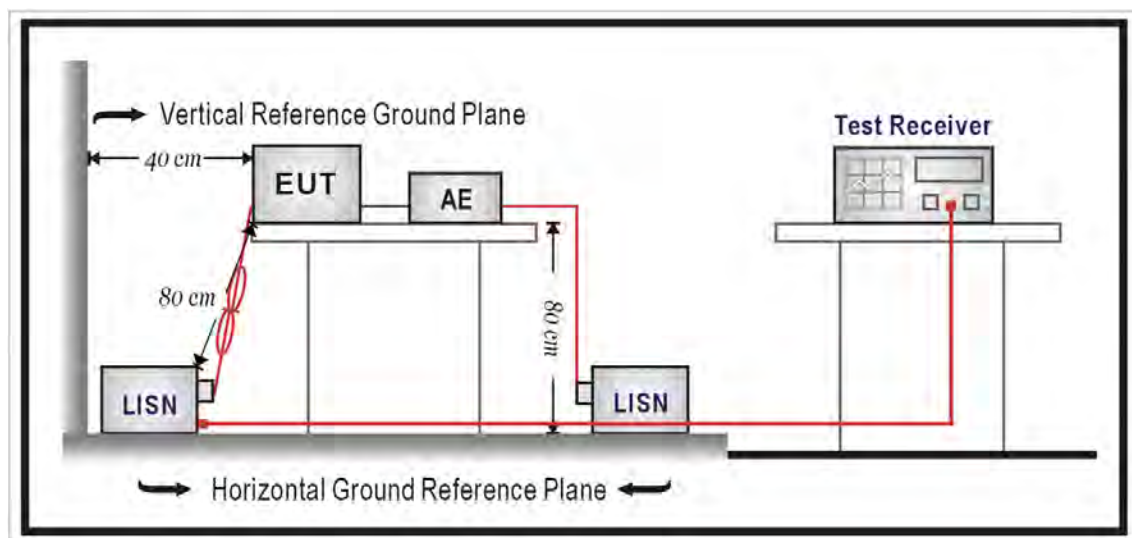

## ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\ \Omega // 50\ \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50  $\Omega$  ports of the LISN shall be resistively terminated into 50  $\Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

## 4.2. Transmitter Radiated Emissions Measurement

### ■ Limit

(1) Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

| EIRP (dBm) | Field Strength at 3 m (dBuV/m) |
|------------|--------------------------------|
| -27        | 68.3                           |

(2) Limits of Radiated Emission Measurement


Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequency Range (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490         | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705         | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0          | 30                                | 30                            |
| 30 ~ 88               | 10                                | 3                             |
| 88 ~ 216              | 150                               | 3                             |
| 216 ~ 960             | 200                               | 3                             |
| Above 960             | 500                               | 3                             |


- Note:
- The lower limit shall apply at the transition frequencies.
  - Emission level (dBuV/m) = 20 log Emission level (uV/m).
  - As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## ■ Setup


9 kHz ~ 30 MHz

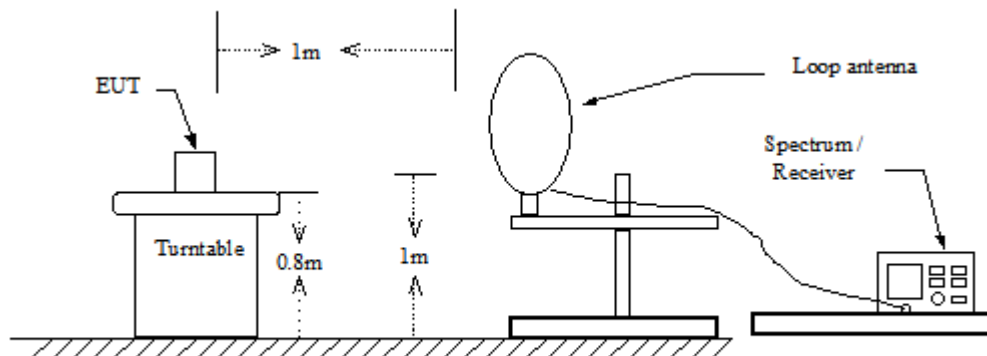

30 MHz ~ 1 GHz

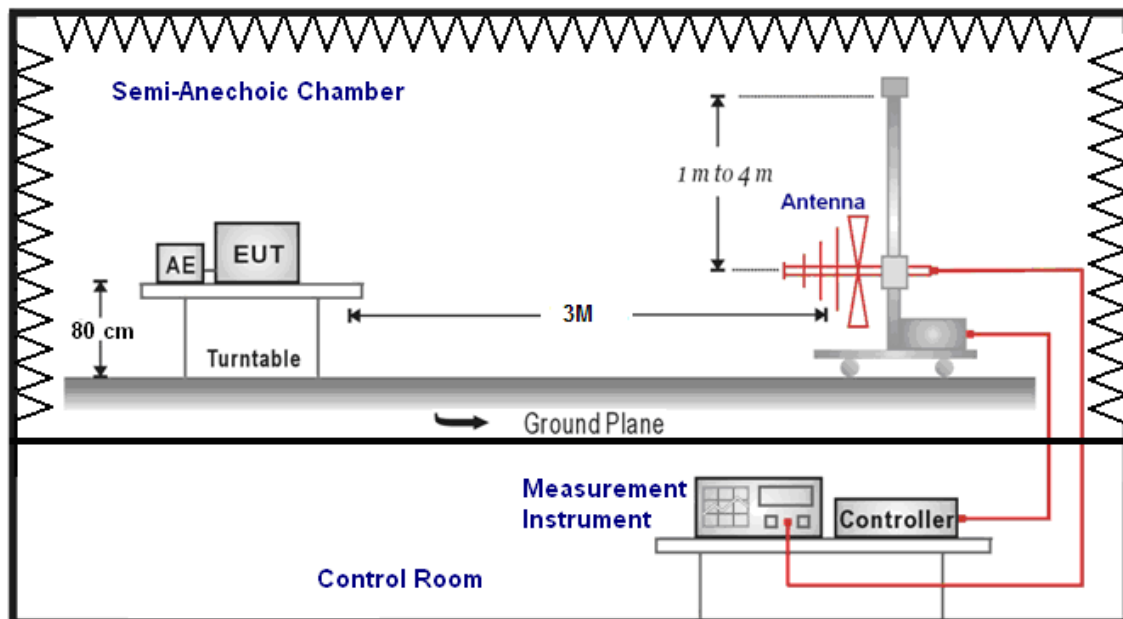

Above 1 GHz

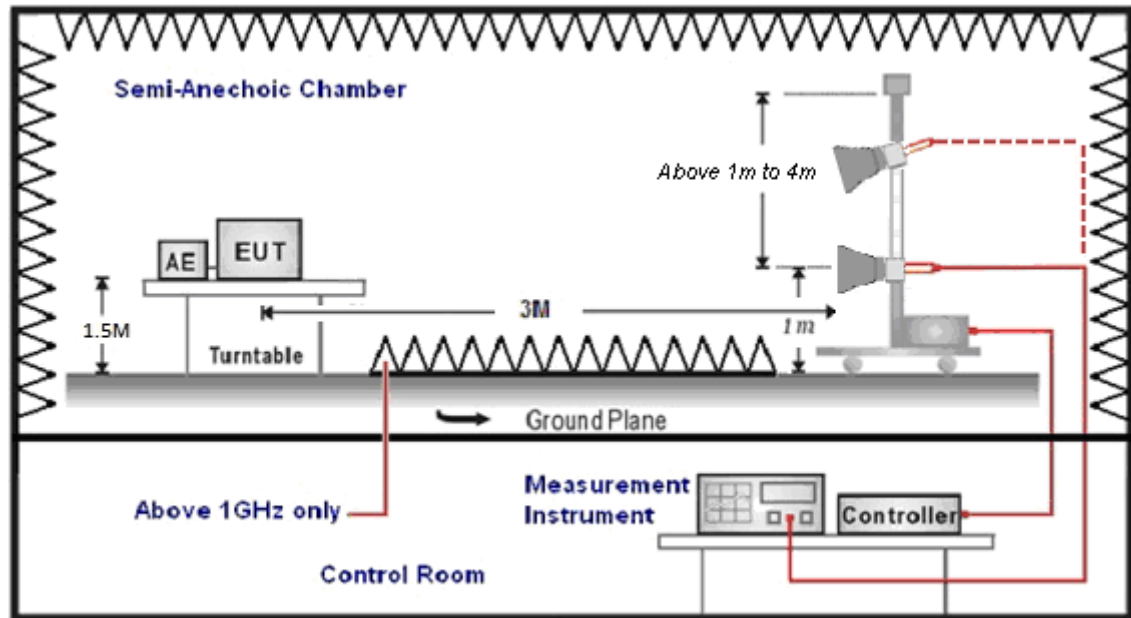

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 30 MHz the resolution bandwidth is set to 10 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements. The video bandwidth is 3 times of the resolution bandwidth.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1)  $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2)  $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

#### Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                       | Setting                                             |
|------------------------------------------|-----------------------------------------------------|
| Attenuation                              | Auto                                                |
| Start Frequency                          | 1000 MHz                                            |
| Stop Frequency                           | 40 GHz                                              |
| RBW/VBW(Emission in restricted band)     | 1 MHz / 3 MHz for Peak<br>1 MHz / (1/T) for Average |
| RBW/VBW(Emission in non-restricted band) | 1 MHz / 3 MHz for Peak                              |


### 4.3. Maximum Conducted Output Power Measurement

#### ■ Limit

| Frequency Range (MHz) | FCC Maximum Conducted Output Power Limit             |
|-----------------------|------------------------------------------------------|
|                       | Client                                               |
| 5.150 ~ 5.250 GHz     | The lesser of 250 mW (24 dBm)                        |
| 5.250 ~ 5.350 GHz     | The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B) |
| 5.470 ~ 5.725 GHz     | The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B) |
| 5.725 ~ 5.850 GHz     | The lesser of 1 W (30 dBm)                           |

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

#### ■ Test Setup

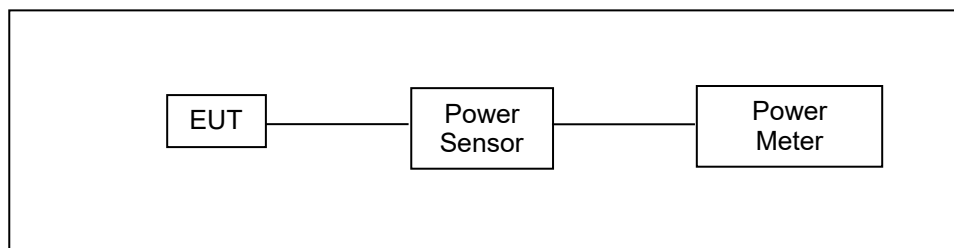

#### ■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)


b) Method PM-G (Measurement using a gated RF average power meter)

#### 4.4. 26 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

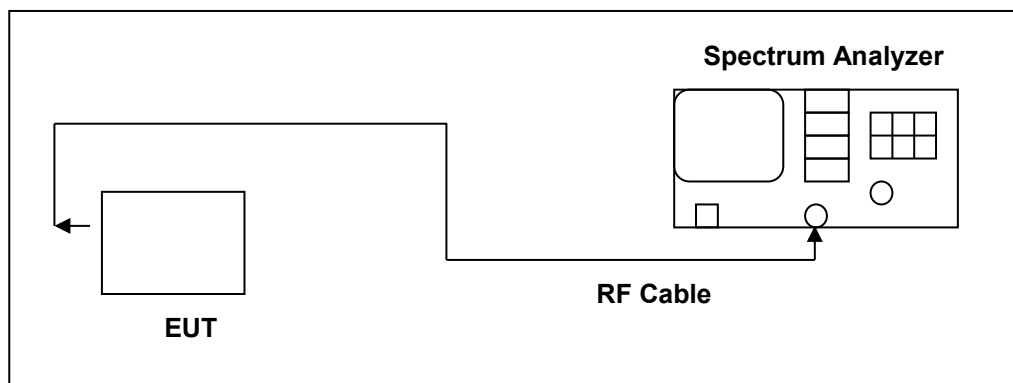

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

| Spectrum Parameter | Setting                                     |
|--------------------|---------------------------------------------|
| Attenuation        | Auto                                        |
| Span Frequency     | >26 dB Bandwidth                            |
| RBW                | Approximately 1 % of the emission bandwidth |
| VBW                | VBW > RBW                                   |
| Detector           | Peak                                        |
| Trace              | Max Hold                                    |
| Sweep Time         | Auto                                        |


## 4.5. 6 dB RF Bandwidth Measurement

### ■ Limit

#### 6 dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5825 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### ■ Test Setup

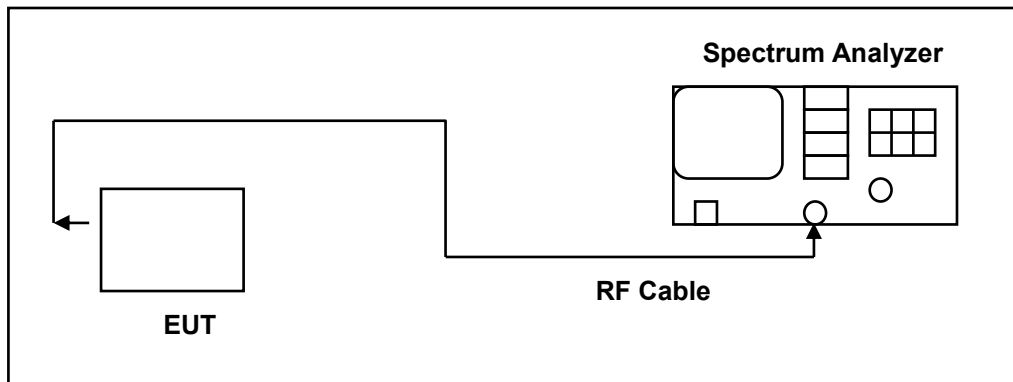

### ■ Test Procedure

#### 6 dB RF Bandwidth

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.


## 4.6. Maximum Power Spectral Density Measurement

### ■ Limit

| Frequency Range (MHz) | FCC Limit      |
|-----------------------|----------------|
|                       | Client         |
| 5.150 ~ 5.250 GHz     | 11 dBm/MHz     |
| 5.250 ~ 5.350 GHz     | 11 dBm/MHz     |
| 5.470 ~ 5.725 GHz     | 11 dBm/MHz     |
| 5.725 ~ 5.850 GHz     | 30 dBm/500 kHz |

According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

### ■ Test Setup

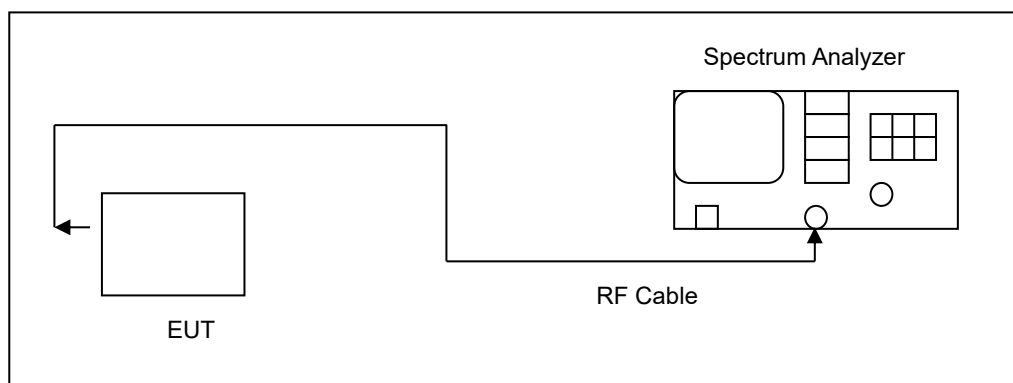

■ **Test Procedure**

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

| Spectrum Parameter                                                                                                                            | Setting                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|
| Attenuation                                                                                                                                   | Auto                                                         |
| Span Frequency                                                                                                                                | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                                                                                                                                           | 1 MHz<br>(5725 ~ 5850 MHz use 100 kHz)                       |
| VBW                                                                                                                                           | 3 MHz<br>(5725 ~ 5850 MHz use 300 kHz)                       |
| Detector                                                                                                                                      | RMS                                                          |
| Trace                                                                                                                                         | AVERAGE                                                      |
| Sweep Time                                                                                                                                    | Auto                                                         |
| Trace Average                                                                                                                                 | 100 times                                                    |
| Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/100 \text{ kHz})$ to the measured result. |                                                              |

#### 4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

##### ■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

## 4.8. Antenna Requirement

### ■ Requirement

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ■ Antenna Connector Construction

See section 2 – antenna information.

### ■ Directional Gain Calculated

| Test mode                                                                                                                             | Band     | Transmission Type | Antenna |       |       |       | Directional Gain for Power (dBi) | Directional Gain for PSD (dBi) | Power Limit Reduction (dB) | PSD Limit Reduction (dB) |
|---------------------------------------------------------------------------------------------------------------------------------------|----------|-------------------|---------|-------|-------|-------|----------------------------------|--------------------------------|----------------------------|--------------------------|
|                                                                                                                                       |          |                   | ANT-0   | ANT-1 | ANT-2 | ANT-3 |                                  |                                |                            |                          |
|                                                                                                                                       |          |                   | (dBi)   | (dBi) | (dBi) | (dBi) |                                  |                                |                            |                          |
| 802.11a                                                                                                                               | Band 1   | Ant-0             | 2.20    | -     | -     | -     | 2.20                             | 2.20                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 2-A |                   | 2.20    | -     | -     | -     | 2.20                             | 2.20                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 2-C |                   | 2.60    | -     | -     | -     | 2.60                             | 2.60                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 3   |                   | 2.60    | -     | -     | -     | 2.60                             | 2.60                           | 0.00                       | 0.00                     |
| 802.11n HT20<br>802.11n HT40<br>802.11ac VHT20<br>802.11ac VHT40<br>802.11ac VHT80<br>802.11ax HE20<br>802.11ax HE40<br>802.11ax HE80 | Band 1   | Ant-0             | 2.20    | -     | -     | -     | 2.20                             | 2.20                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 2-A |                   | 2.20    | -     | -     | -     | 2.20                             | 2.20                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 2-C |                   | 2.60    | -     | -     | -     | 2.60                             | 2.60                           | 0.00                       | 0.00                     |
|                                                                                                                                       | Band 3   |                   | 2.60    | -     | -     | -     | 2.60                             | 2.60                           | 0.00                       | 0.00                     |
|                                                                                                                                       |          |                   |         |       |       |       |                                  |                                |                            |                          |


If transmit signals are correlated, then Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$

If all transmit signals are completely uncorrelated, then Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$

## 5 Test Results


### 5.1. Conducted Emission

|              |                    |        |                |
|--------------|--------------------|--------|----------------|
| Standard:    | FCC Part 15.407    | Line:  | L1             |
| Test item:   | Conducted Emission | Power: | AC 120 V/60 Hz |
| Test Mode:   | Transmit mode      |        |                |
| Description: |                    |        |                |

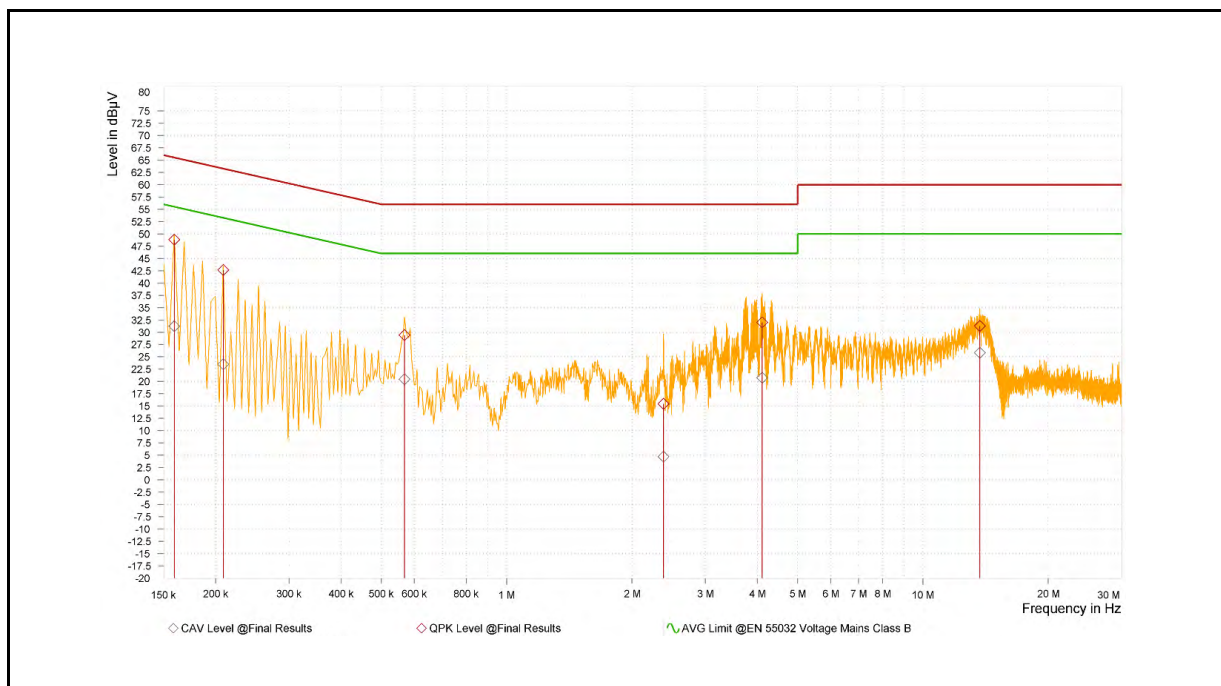

| Rg | Frequency [MHz] | QP Result [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Result [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Correction factor [dB] | Line |
|----|-----------------|------------------|-----------------|----------------|------------------|-----------------|----------------|------------------------|------|
| 1  | 0.159           | 48.83            | 65.52           | 16.68          | 31.25            | 55.52           | 24.27          | 9.61                   | L1   |
| 1  | 0.209           | 42.65            | 63.26           | 20.62          | 23.52            | 53.26           | 29.74          | 9.61                   | L1   |
| 1  | 0.569           | 29.41            | 56.00           | 26.59          | 20.44            | 46.00           | 25.56          | 9.63                   | L1   |
| 1  | 2.382           | 15.44            | 56.00           | 40.56          | 4.73             | 46.00           | 41.27          | 9.67                   | L1   |
| 1  | 4.110           | 32.02            | 56.00           | 23.98          | 20.75            | 46.00           | 25.25          | 9.71                   | L1   |
| 1  | 13.704          | 31.29            | 60.00           | 28.71          | 25.85            | 50.00           | 24.15          | 9.84                   | L1   |

|              |                    |        |                |
|--------------|--------------------|--------|----------------|
| Standard:    | FCC Part 15.407    | Line:  | N              |
| Test item:   | Conducted Emission | Power: | AC 120 V/60 Hz |
| Test Mode:   | Transmit mode      |        |                |
| Description: |                    |        |                |

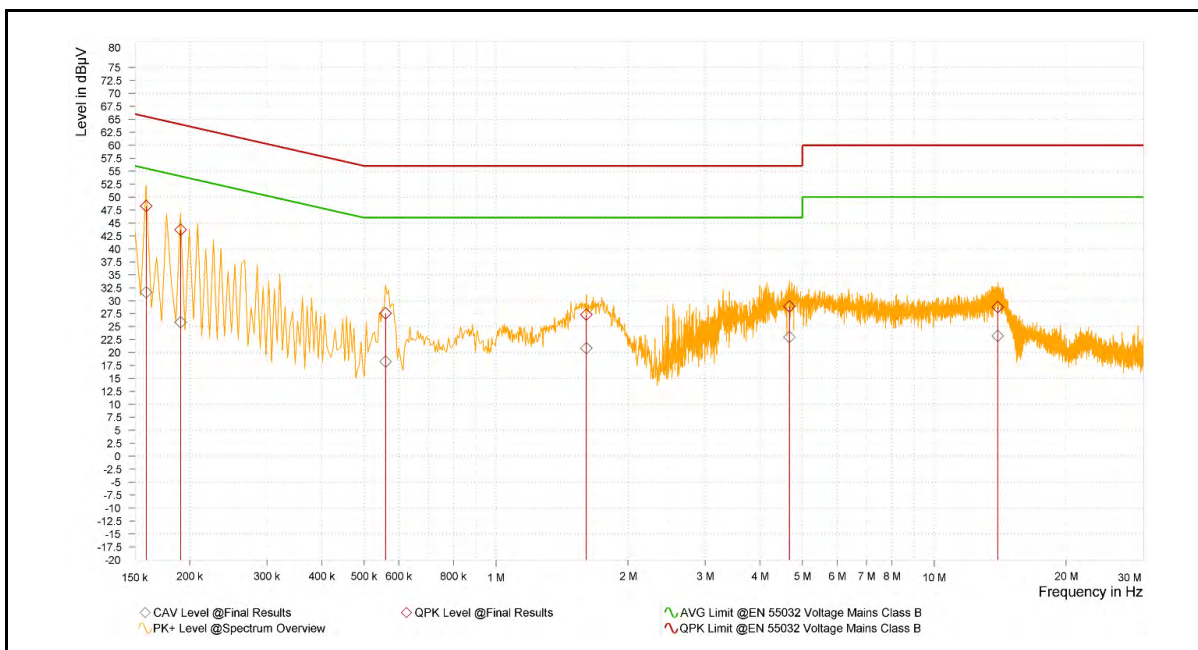


| Rg | Frequency [MHz] | QP Result [dBμV] | QP Limit [dBμV] | QP Margin [dB] | AV Result [dBμV] | AV Limit [dBμV] | AV Margin [dB] | Correction factor [dB] | Line |
|----|-----------------|------------------|-----------------|----------------|------------------|-----------------|----------------|------------------------|------|
| 1  | 0.159           | 48.25            | 65.52           | 17.26          | 31.62            | 55.52           | 23.90          | 9.59                   | N    |
| 1  | 0.191           | 43.71            | 64.01           | 20.31          | 25.84            | 54.01           | 28.17          | 9.59                   | N    |
| 1  | 0.560           | 27.58            | 56.00           | 28.42          | 18.27            | 46.00           | 27.73          | 9.61                   | N    |
| 1  | 1.608           | 27.32            | 56.00           | 28.68          | 20.84            | 46.00           | 25.16          | 9.65                   | N    |
| 1  | 4.673           | 28.92            | 56.00           | 27.08          | 22.99            | 46.00           | 23.01          | 9.73                   | N    |
| 1  | 13.965          | 28.79            | 60.00           | 31.21          | 23.20            | 50.00           | 26.80          | 9.93                   | N    |

## 5.2. Radiated Emission Measurement


Below 1 GHz

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

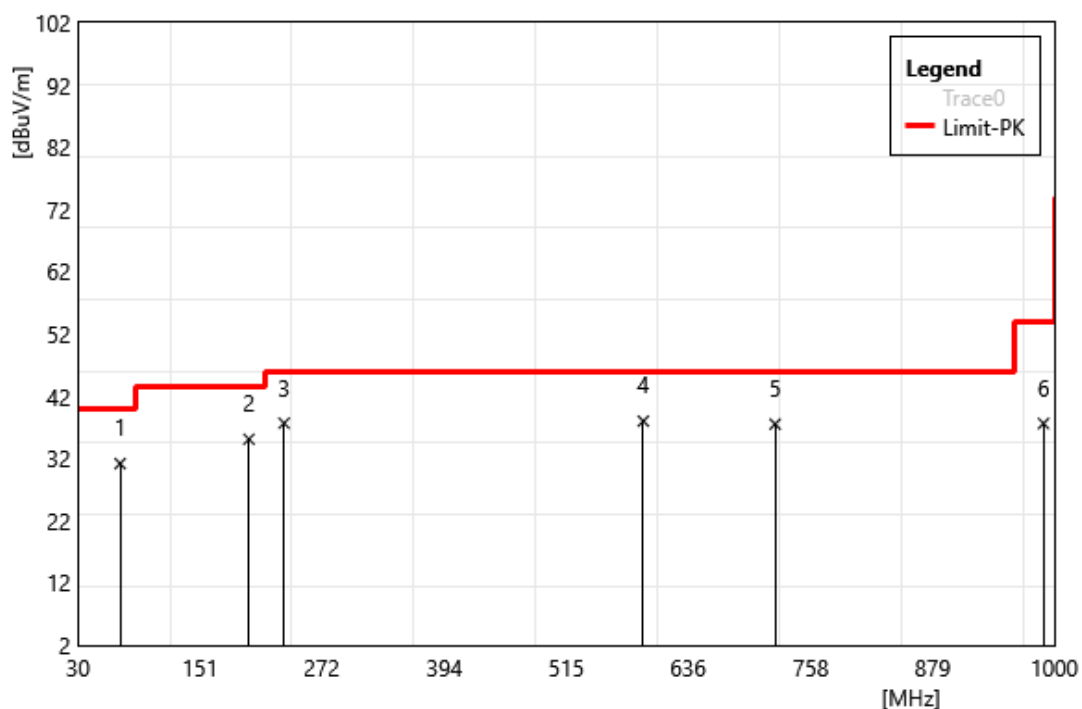

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 71.71            | 41.22           | -10.04                    | 31.18            | 40.00           | -8.82        | QP     |
| 2  | 199.75           | 45.52           | -10.42                    | 35.10            | 43.50           | -8.40        | QP     |
| 3  | 234.67           | 46.81           | -9.13                     | 37.68            | 46.00           | -8.32        | QP     |
| 4  | 591.63           | 39.40           | -1.39                     | 38.01            | 46.00           | -7.99        | QP     |
| 5  | 722.58           | 36.49           | 1.03                      | 37.52            | 46.00           | -8.48        | QP     |
| 6  | 989.33           | 32.16           | 5.47                      | 37.63            | 54.00           | -16.37       | QP     |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

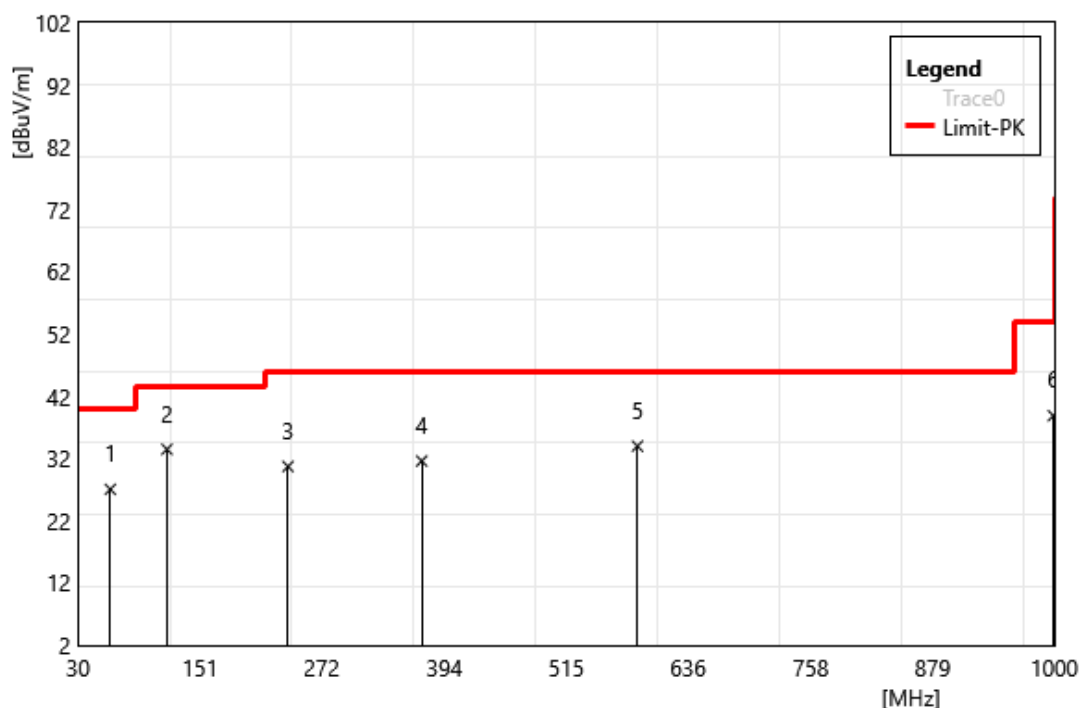


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 62.01            | 35.52           | -8.47                     | 27.05            | 40.00           | -12.95       | QP     |
| 2  | 118.27           | 43.61           | -10.13                    | 33.48            | 43.50           | -10.02       | QP     |
| 3  | 238.55           | 39.42           | -8.69                     | 30.73            | 46.00           | -15.27       | QP     |
| 4  | 371.44           | 36.83           | -5.24                     | 31.59            | 46.00           | -14.41       | QP     |
| 5  | 585.81           | 35.58           | -1.59                     | 33.99            | 46.00           | -12.01       | QP     |
| 6  | 999.03           | 33.15           | 5.72                      | 38.87            | 54.00           | -15.13       | QP     |

Harmonic


Above 1 GHz

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

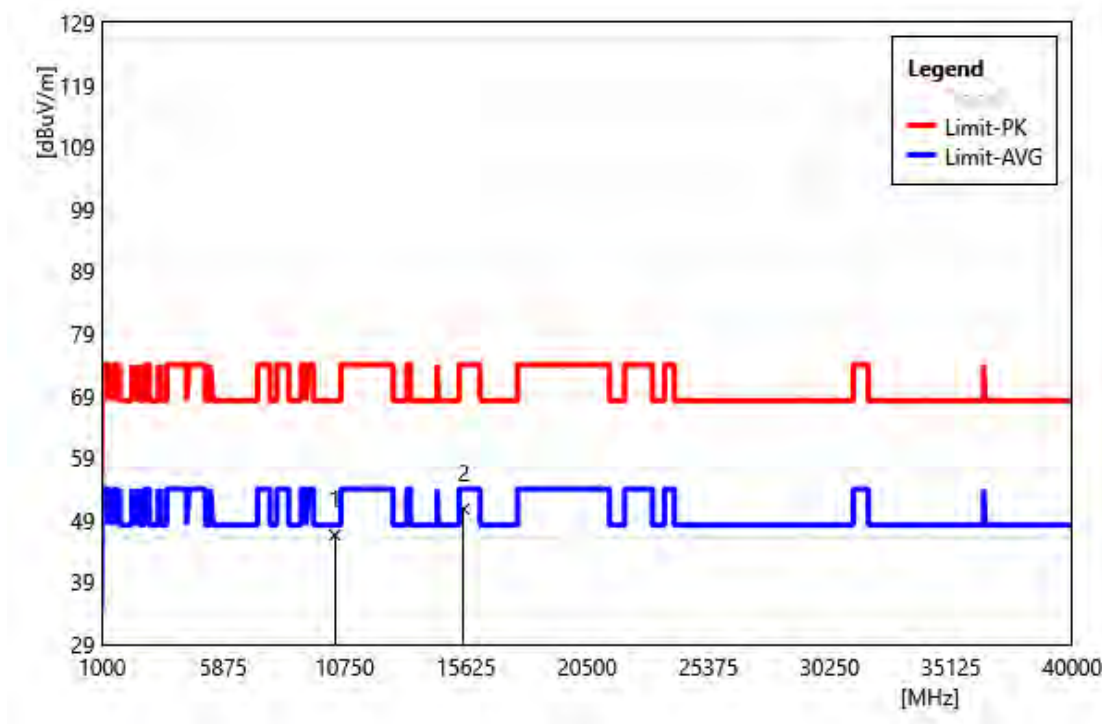


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 40.14           | 6.46                      | 46.61            | 68.20           | -21.59       | PEAK   |
| 2  | 15540.00         | 41.61           | 9.14                      | 50.75            | 74.00           | -23.25       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

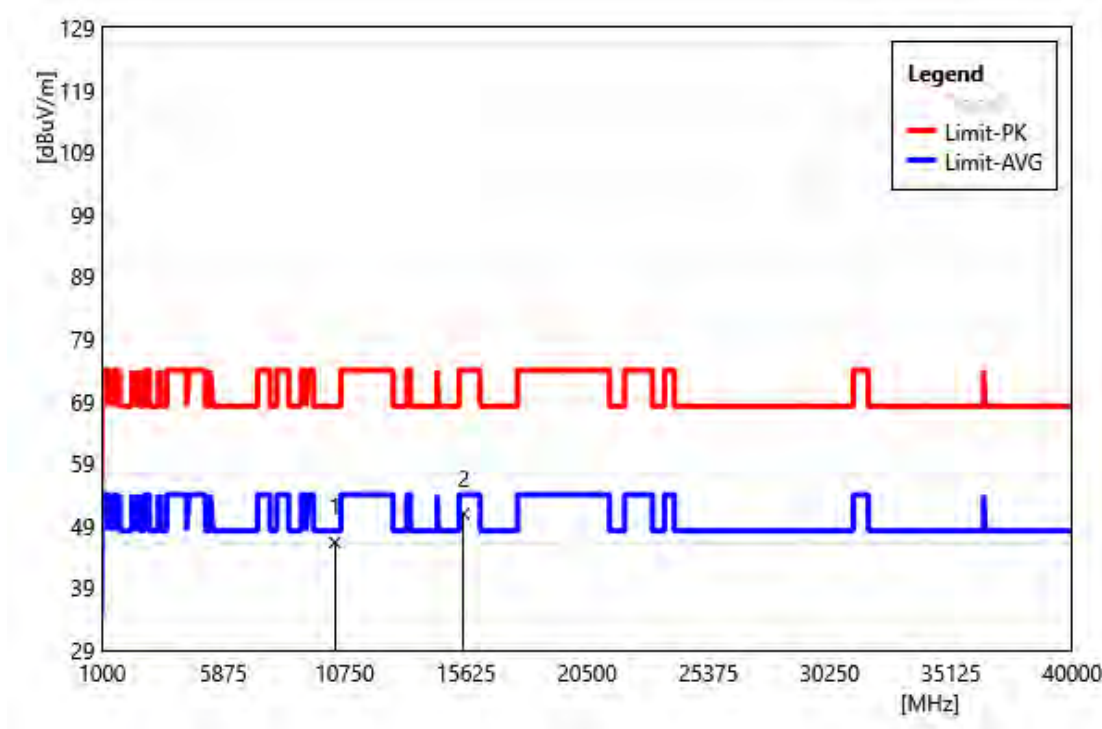


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 39.84           | 6.46                      | 46.30            | 68.20           | -21.90       | PEAK   |
| 2  | 15540.00         | 41.80           | 9.14                      | 50.94            | 74.00           | -23.06       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5200 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

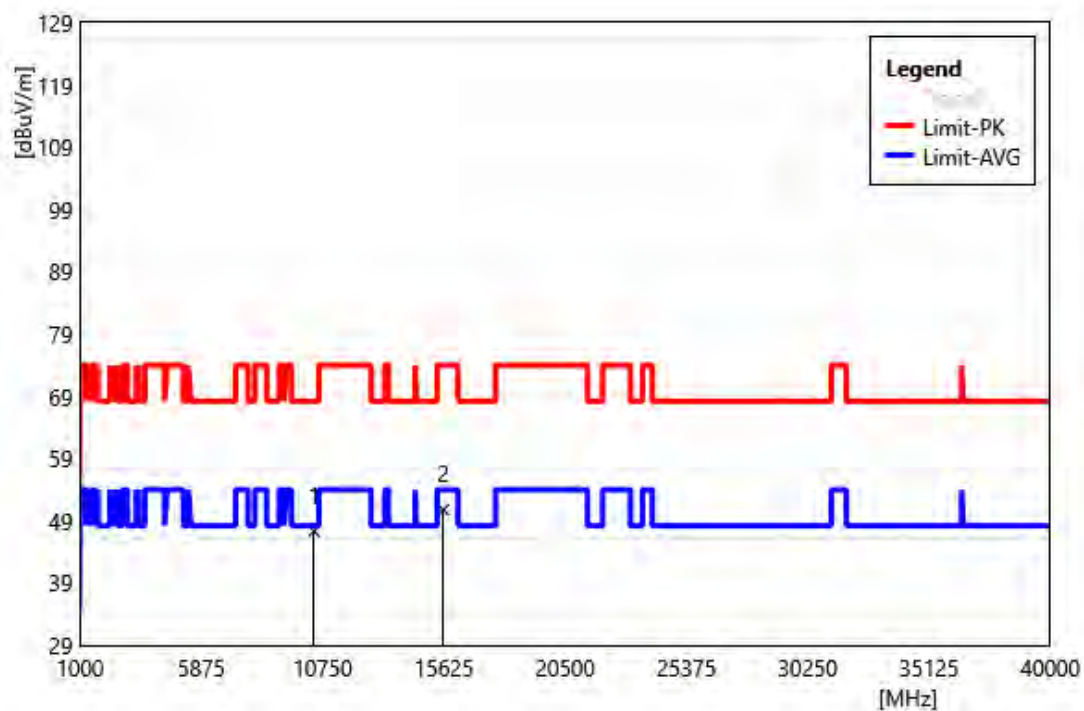


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 41.00           | 6.31                      | 47.31            | 68.20           | -20.89       | PEAK   |
| 2  | 15600.00         | 41.82           | 8.95                      | 50.77            | 74.00           | -23.23       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5200 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

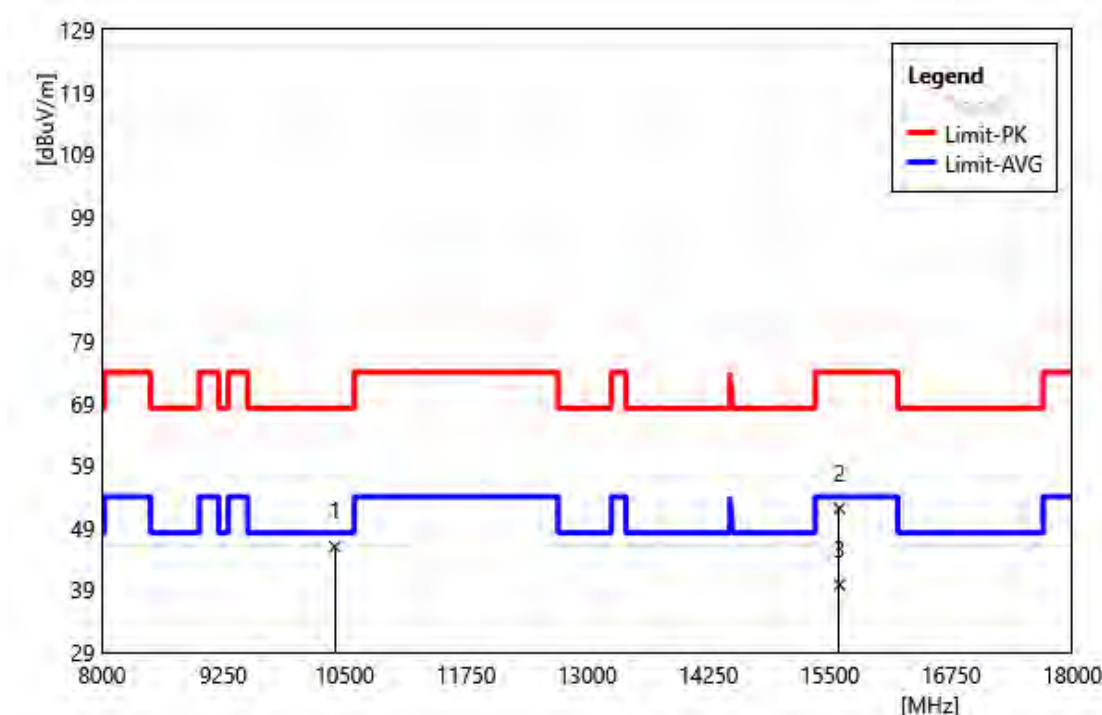


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 39.64           | 6.31                      | 45.95            | 68.20           | -22.25       | PEAK   |
| 2  | 15600.00         | 43.17           | 8.95                      | 52.12            | 74.00           | -21.88       | PEAK   |
| 3  | 15600.00         | 30.90           | 8.95                      | 39.85            | 54.00           | -14.15       | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5240 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

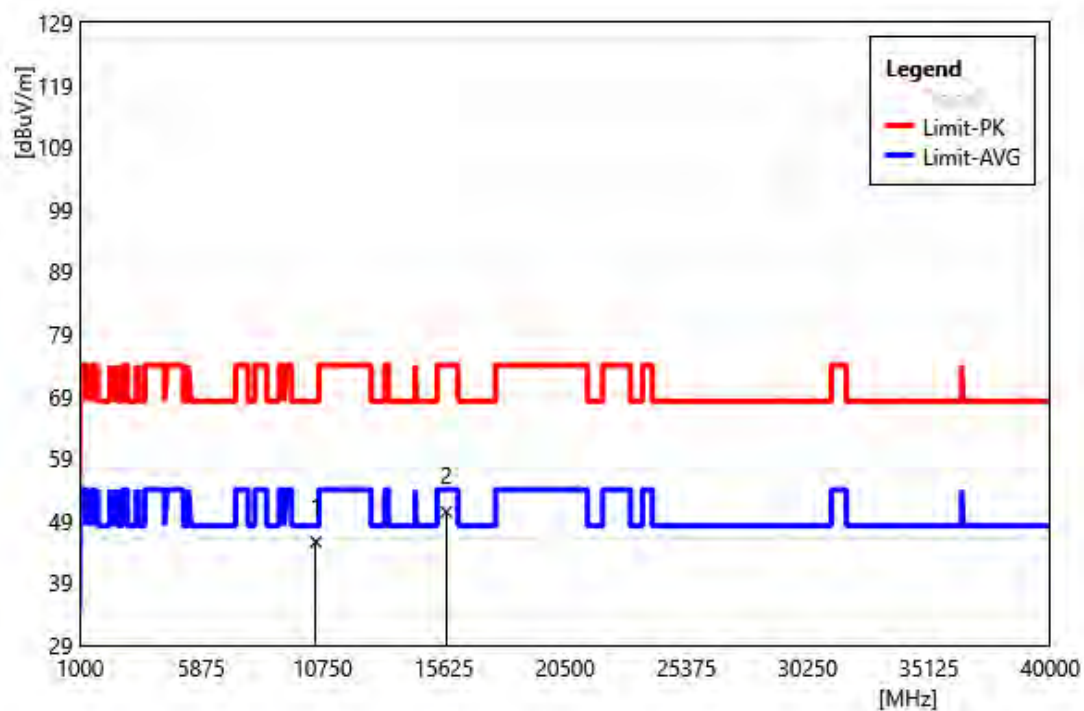


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 39.19           | 6.42                      | 45.61            | 68.20           | -22.59       | PEAK   |
| 2  | 15720.00         | 41.14           | 9.28                      | 50.42            | 74.00           | -23.58       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5240 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

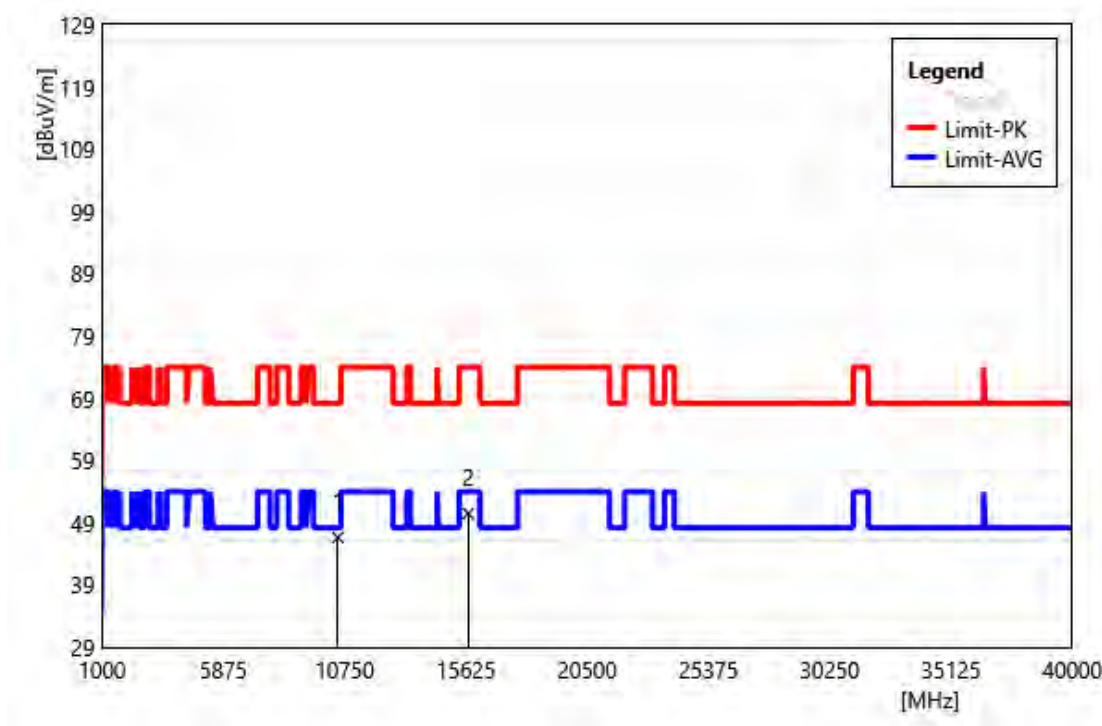


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 40.20           | 6.42                      | 46.62            | 68.20           | -21.58       | PEAK   |
| 2  | 15720.00         | 41.19           | 9.28                      | 50.46            | 74.00           | -23.54       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5260 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

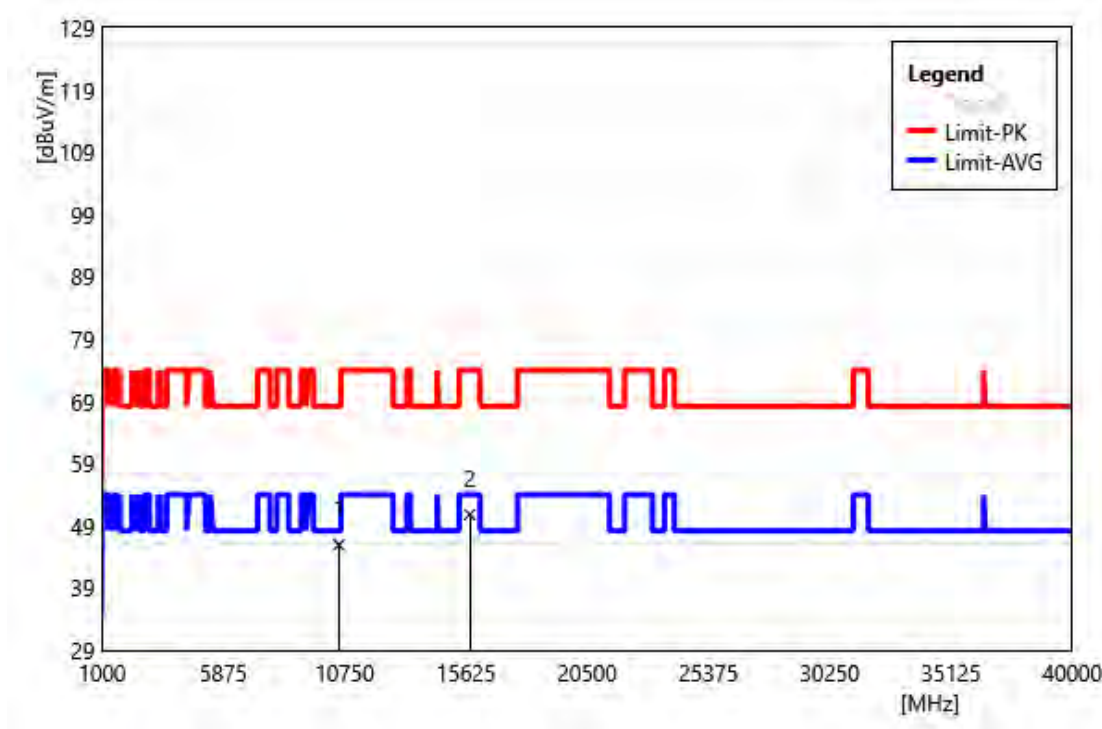


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 39.71           | 6.23                      | 45.94            | 68.20           | -22.26       | PEAK   |
| 2  | 15780.00         | 41.35           | 9.46                      | 50.81            | 74.00           | -23.19       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5260 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

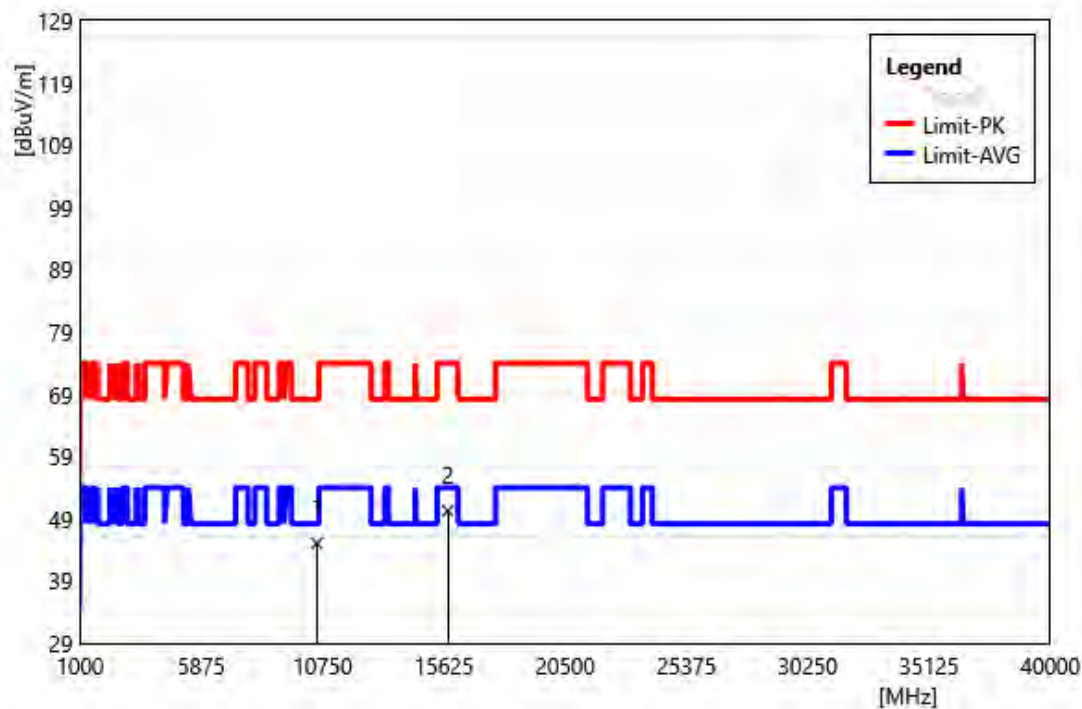


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 38.87           | 6.23                      | 45.10            | 68.20           | -23.10       | PEAK   |
| 2  | 15780.00         | 40.81           | 9.46                      | 50.27            | 74.00           | -23.73       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5280 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

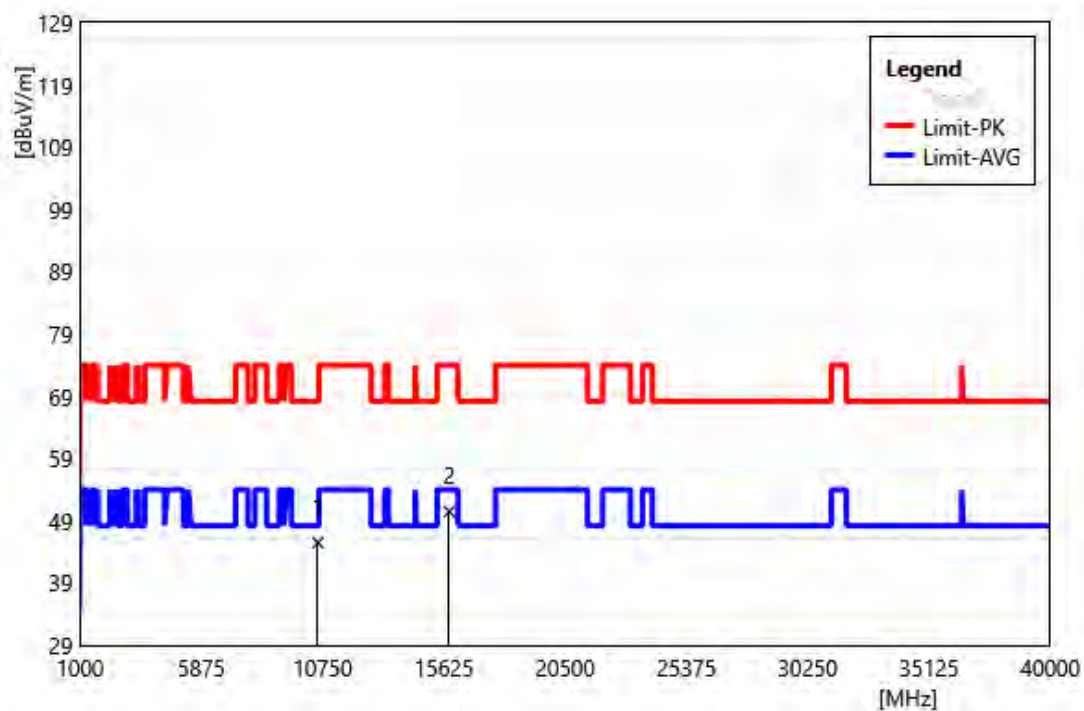


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 39.14           | 6.33                      | 45.47            | 68.20           | -22.73       | PEAK   |
| 2  | 15840.00         | 41.06           | 9.44                      | 50.50            | 74.00           | -23.50       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5280 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

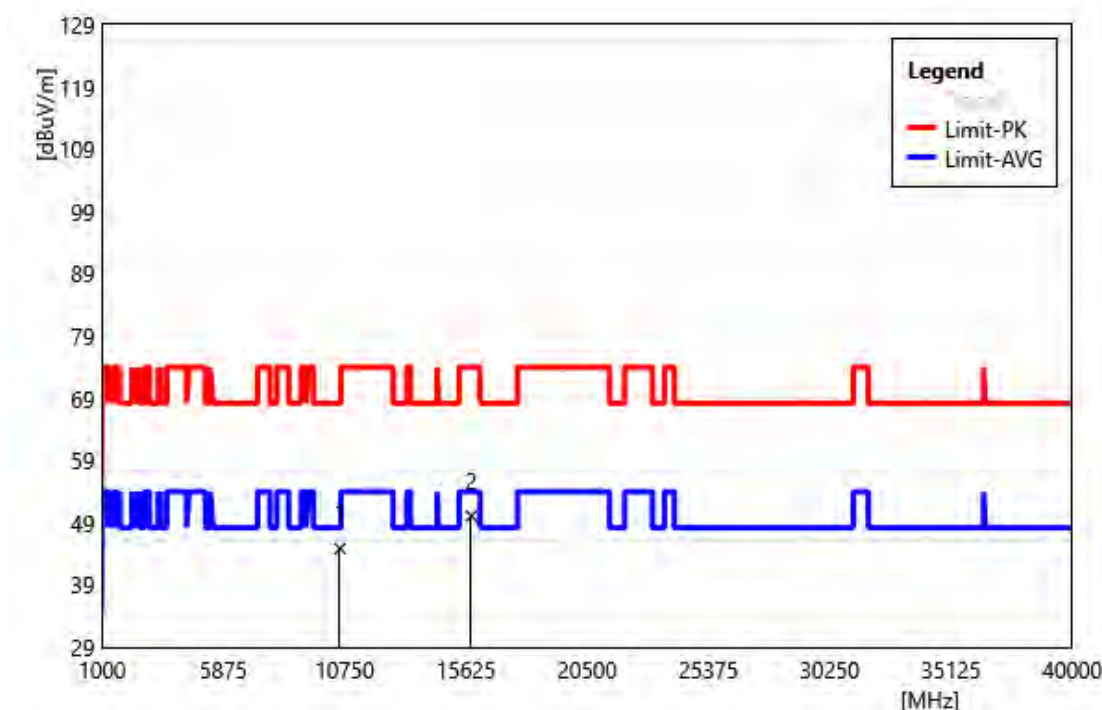


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 38.52           | 6.33                      | 44.86            | 68.20           | -23.34       | PEAK   |
| 2  | 15840.00         | 40.63           | 9.44                      | 50.07            | 74.00           | -23.93       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

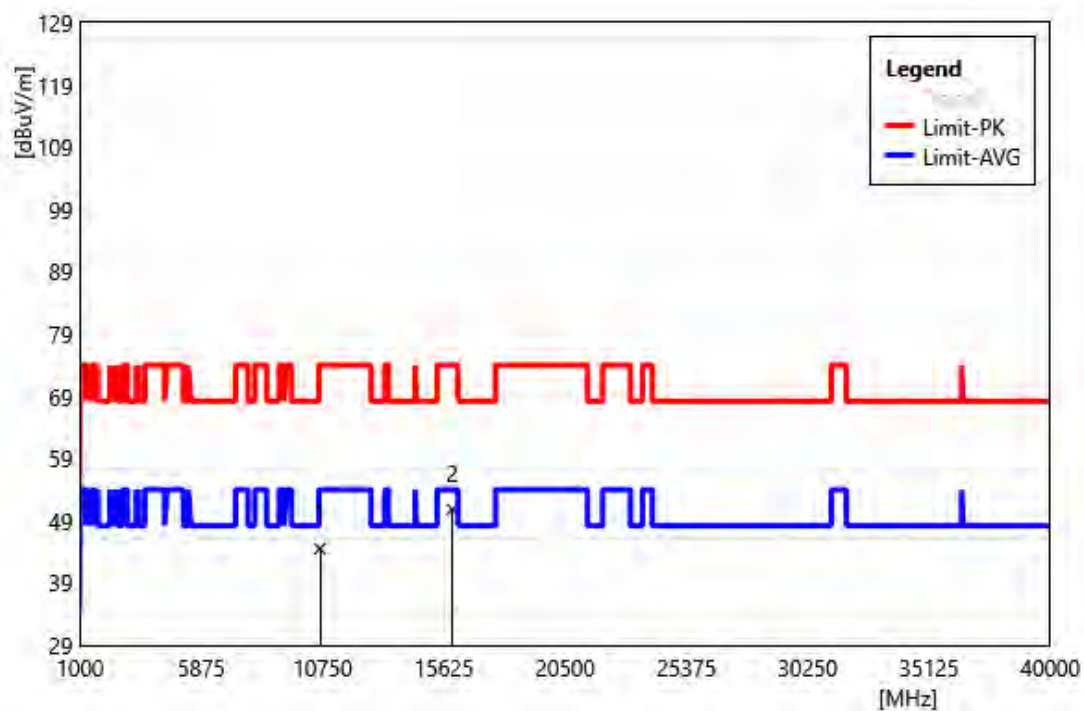


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 38.38           | 6.13                      | 44.52            | 74.00           | -29.48       | PEAK   |
| 2  | 15960.00         | 41.09           | 9.73                      | 50.83            | 74.00           | -23.17       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

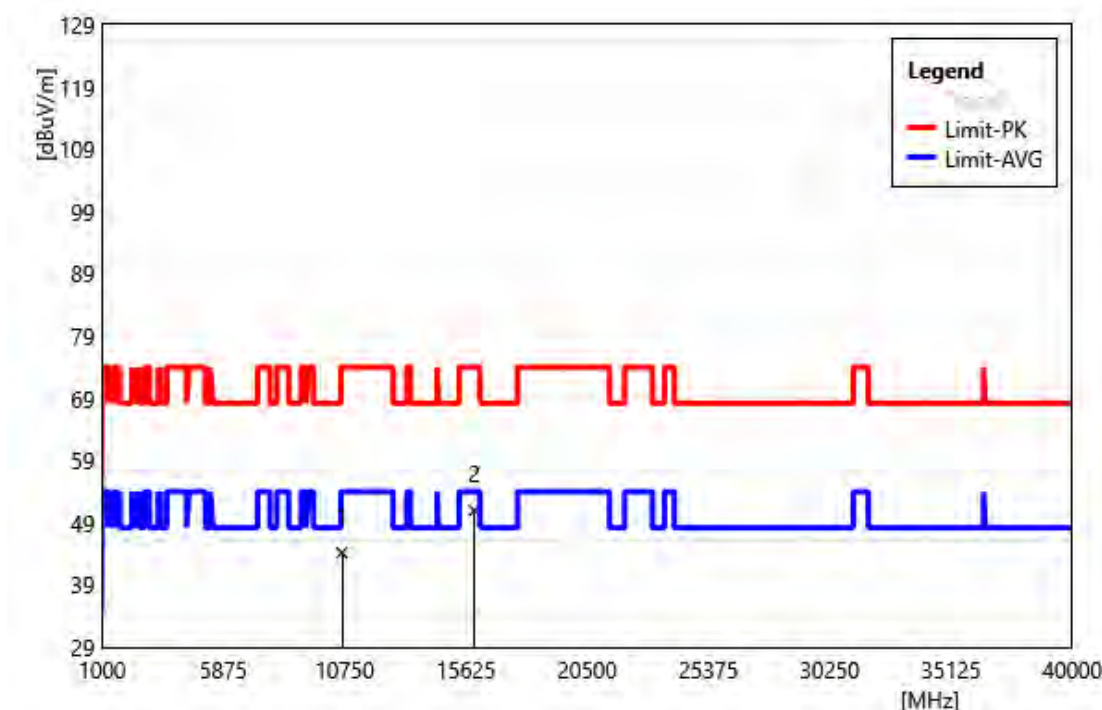


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 38.06           | 6.13                      | 44.19            | 74.00           | -29.81       | PEAK   |
| 2  | 15960.00         | 41.26           | 9.73                      | 51.00            | 74.00           | -23.00       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

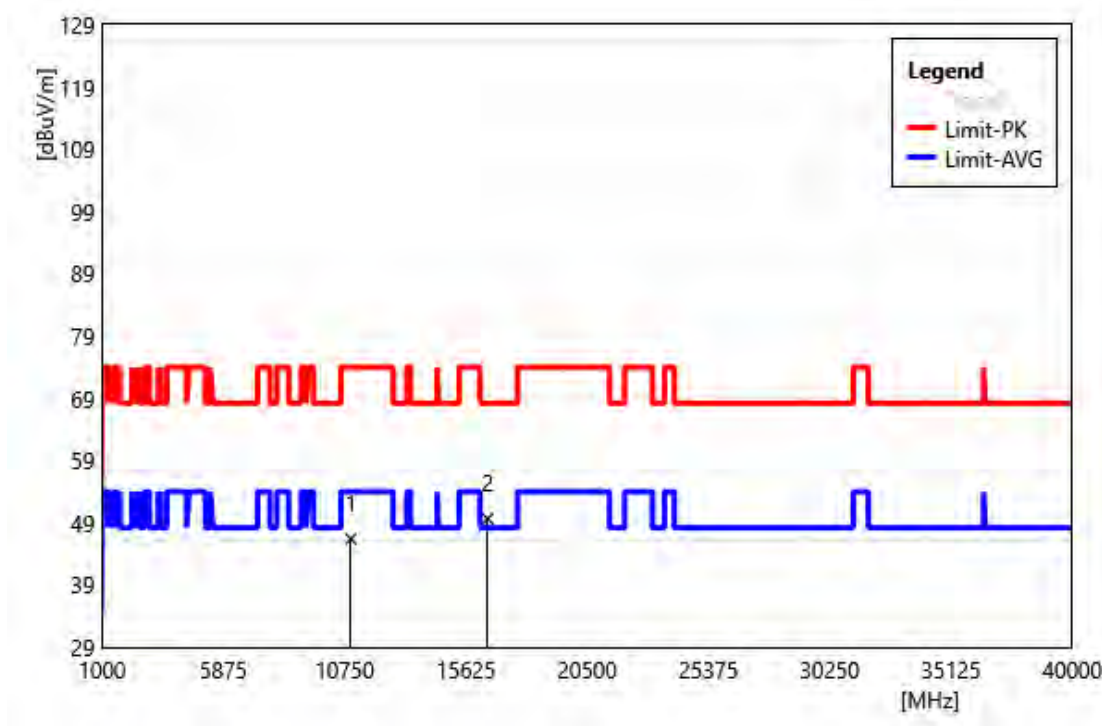


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 40.36           | 6.05                      | 46.42            | 74.00           | -27.58       | PEAK   |
| 2  | 16500.00         | 41.27           | 8.37                      | 49.64            | 68.20           | -18.56       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

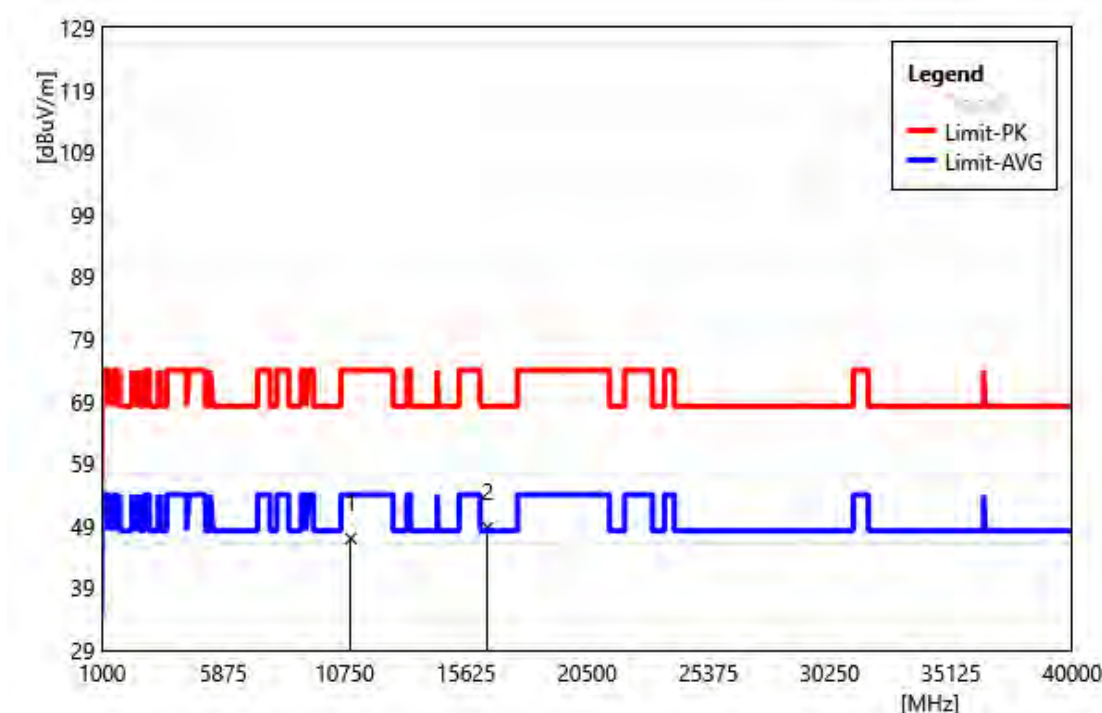


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 40.90           | 6.05                      | 46.95            | 74.00           | -27.05       | PEAK   |
| 2  | 16500.00         | 40.34           | 8.37                      | 48.71            | 68.20           | -19.49       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5560 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

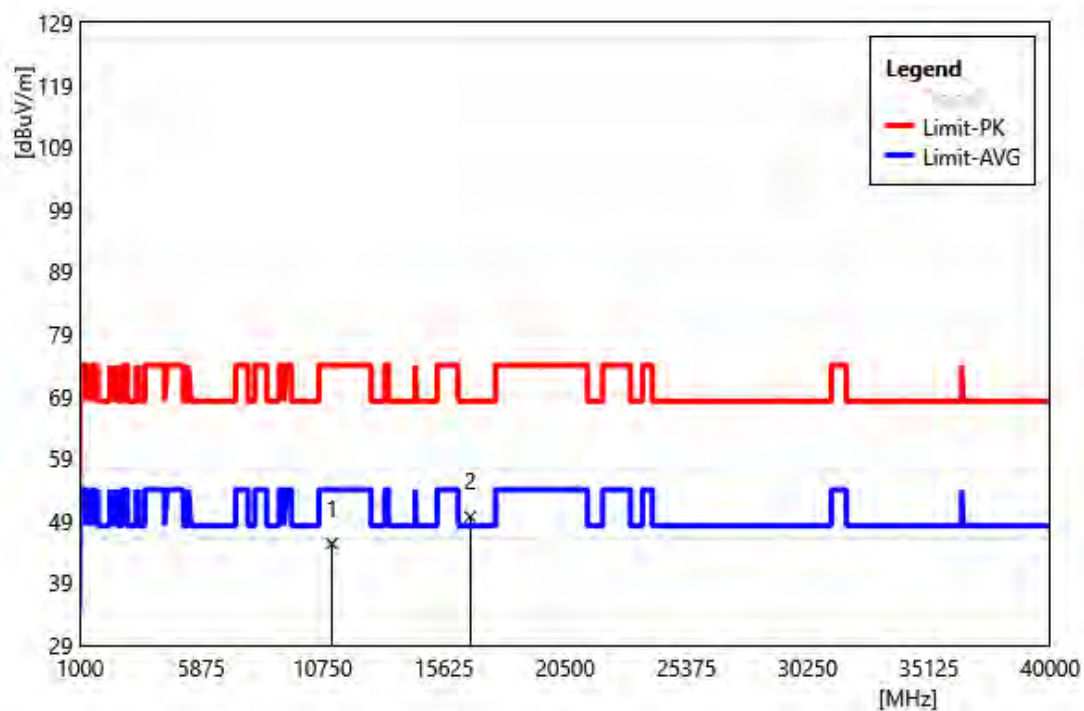


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 38.62           | 6.69                      | 45.31            | 74.00           | -28.69       | PEAK   |
| 2  | 16680.00         | 41.44           | 8.22                      | 49.66            | 68.20           | -18.54       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5560 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

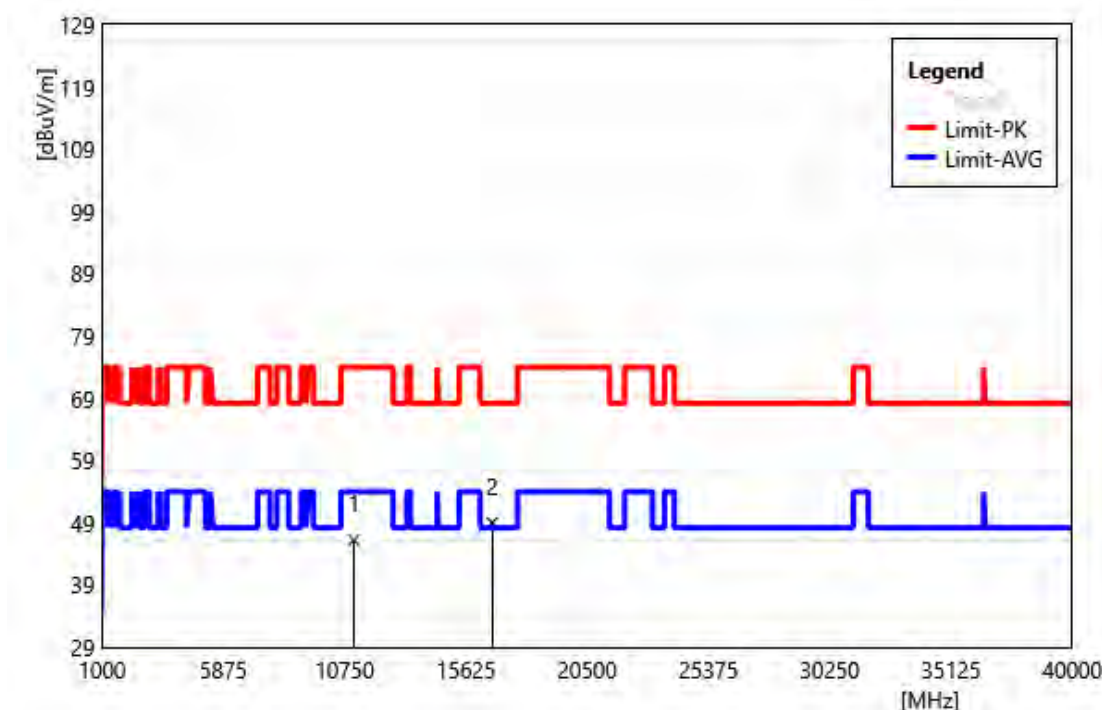


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 39.56           | 6.69                      | 46.25            | 74.00           | -27.75       | PEAK   |
| 2  | 16680.00         | 40.78           | 8.22                      | 49.00            | 68.20           | -19.20       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5700 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

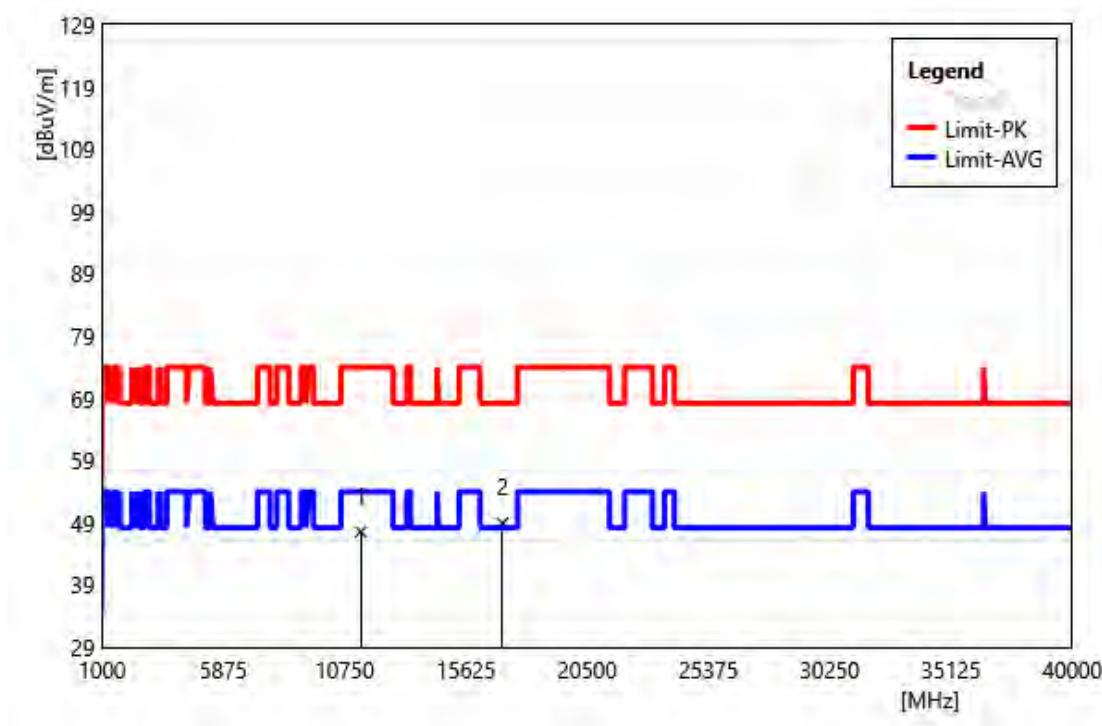


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 40.42           | 7.13                      | 47.55            | 74.00           | -26.45       | PEAK   |
| 2  | 17100.00         | 41.09           | 7.85                      | 48.94            | 68.20           | -19.26       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5700 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

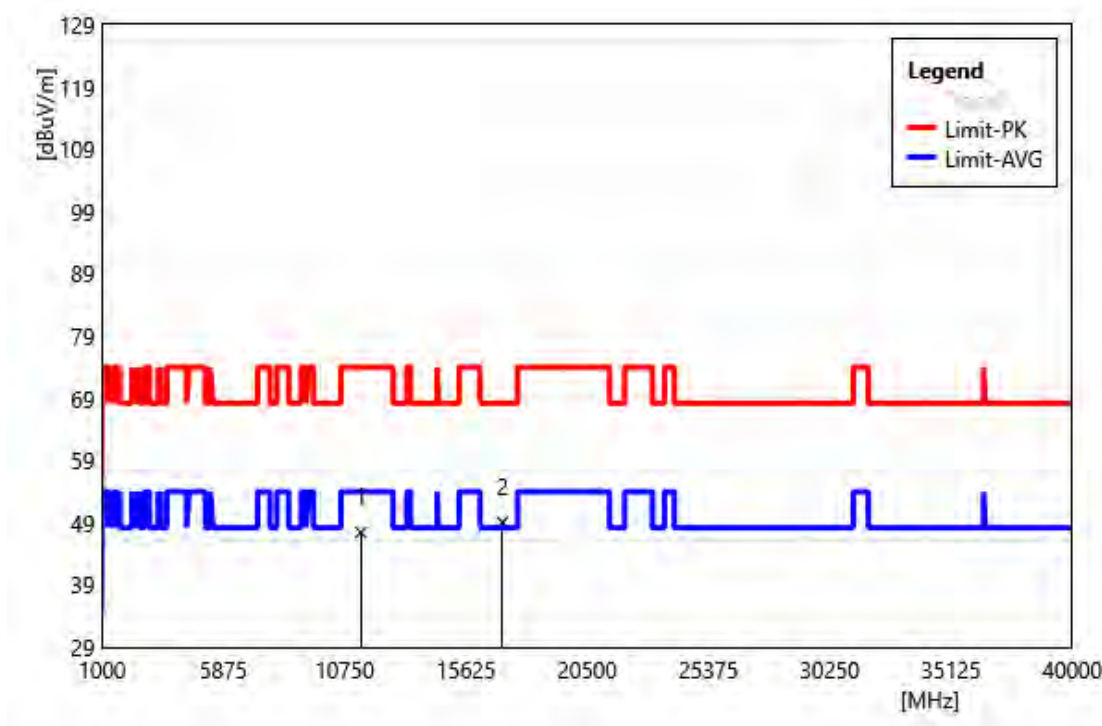


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 40.32           | 7.13                      | 47.45            | 74.00           | -26.55       | PEAK   |
| 2  | 17100.00         | 41.23           | 7.85                      | 49.07            | 68.20           | -19.13       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5745 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

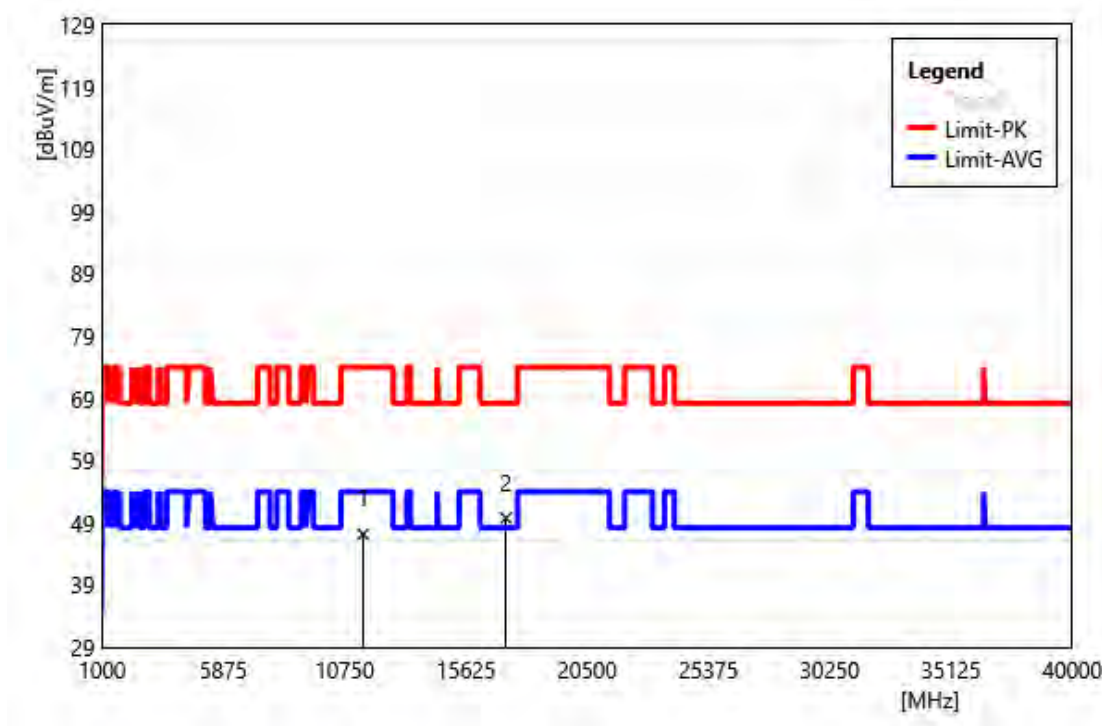


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 39.82           | 7.35                      | 47.17            | 74.00           | -26.83       | PEAK   |
| 2  | 17235.00         | 42.19           | 7.59                      | 49.78            | 68.20           | -18.42       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5745 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

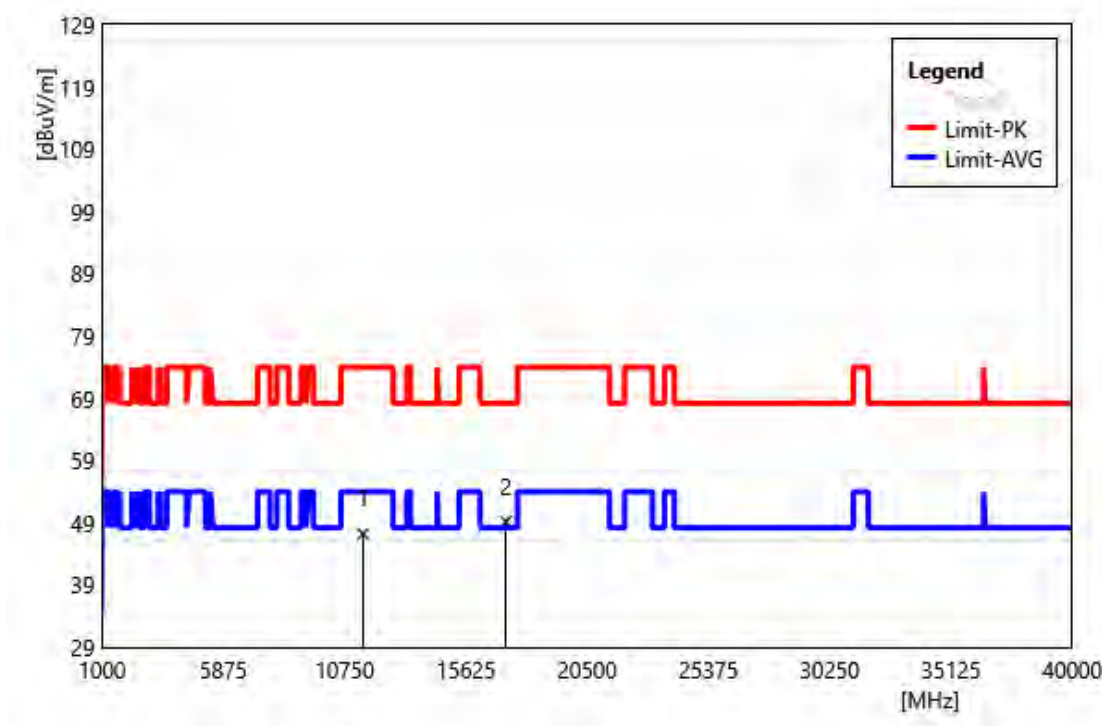


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 39.87           | 7.35                      | 47.22            | 74.00           | -26.78       | PEAK   |
| 2  | 17235.00         | 41.59           | 7.59                      | 49.18            | 68.20           | -19.02       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5785 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

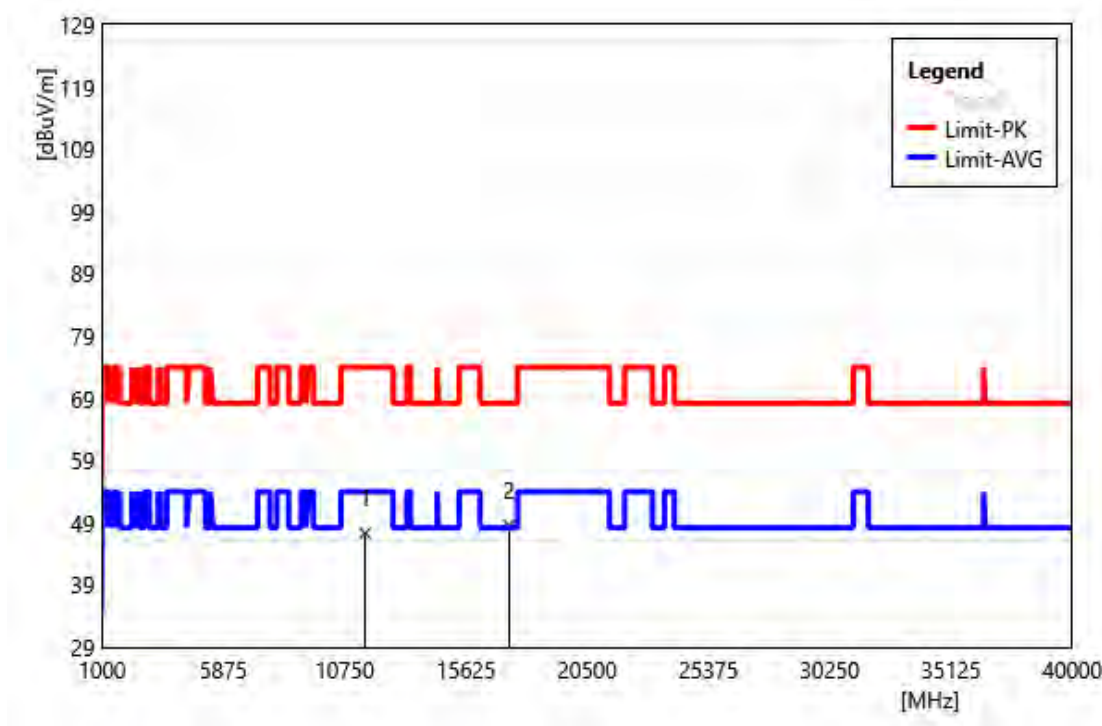


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 39.73           | 7.59                      | 47.31            | 74.00           | -26.69       | PEAK   |
| 2  | 17355.00         | 41.65           | 6.95                      | 48.60            | 68.20           | -19.60       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5785 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

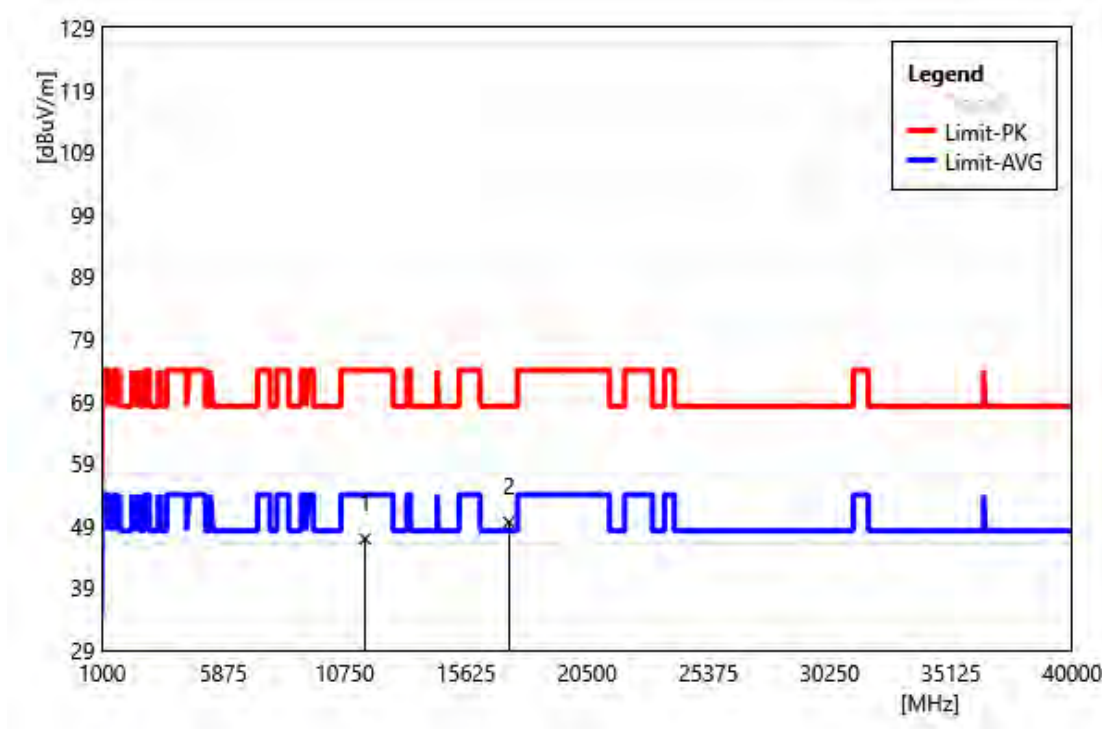


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 39.33           | 7.59                      | 46.91            | 74.00           | -27.09       | PEAK   |
| 2  | 17355.00         | 42.61           | 6.95                      | 49.56            | 68.20           | -18.64       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5825 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

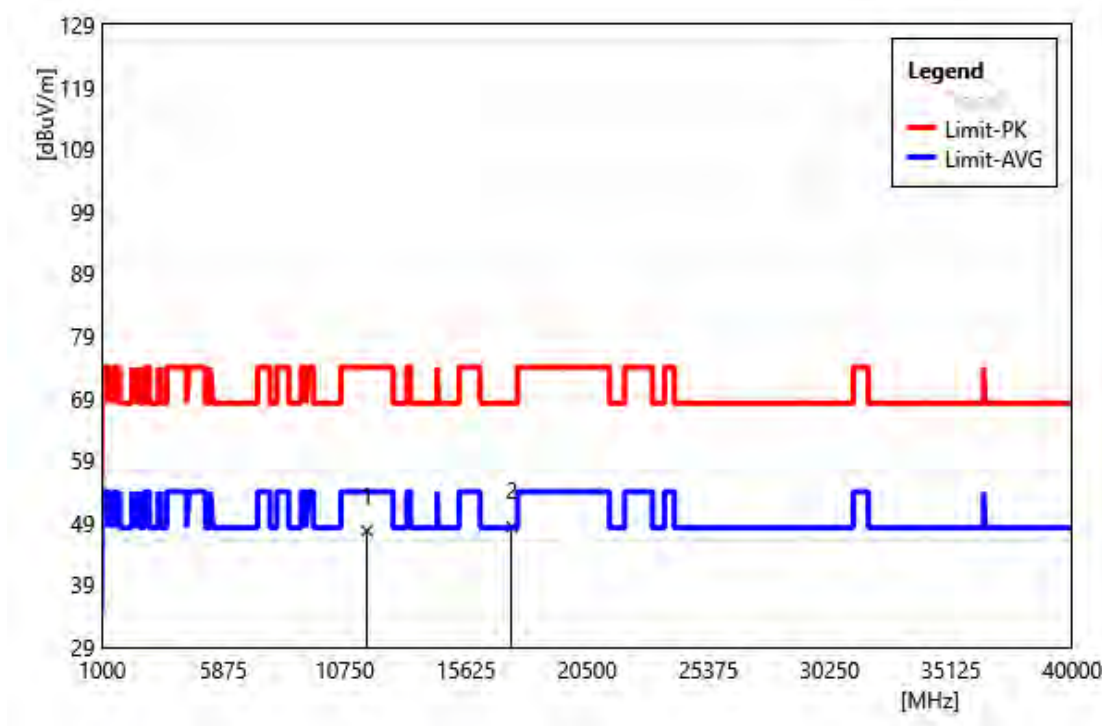


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 39.86           | 7.85                      | 47.71            | 74.00           | -26.29       | PEAK   |
| 2  | 17475.00         | 41.08           | 7.26                      | 48.34            | 68.20           | -19.86       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5825 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

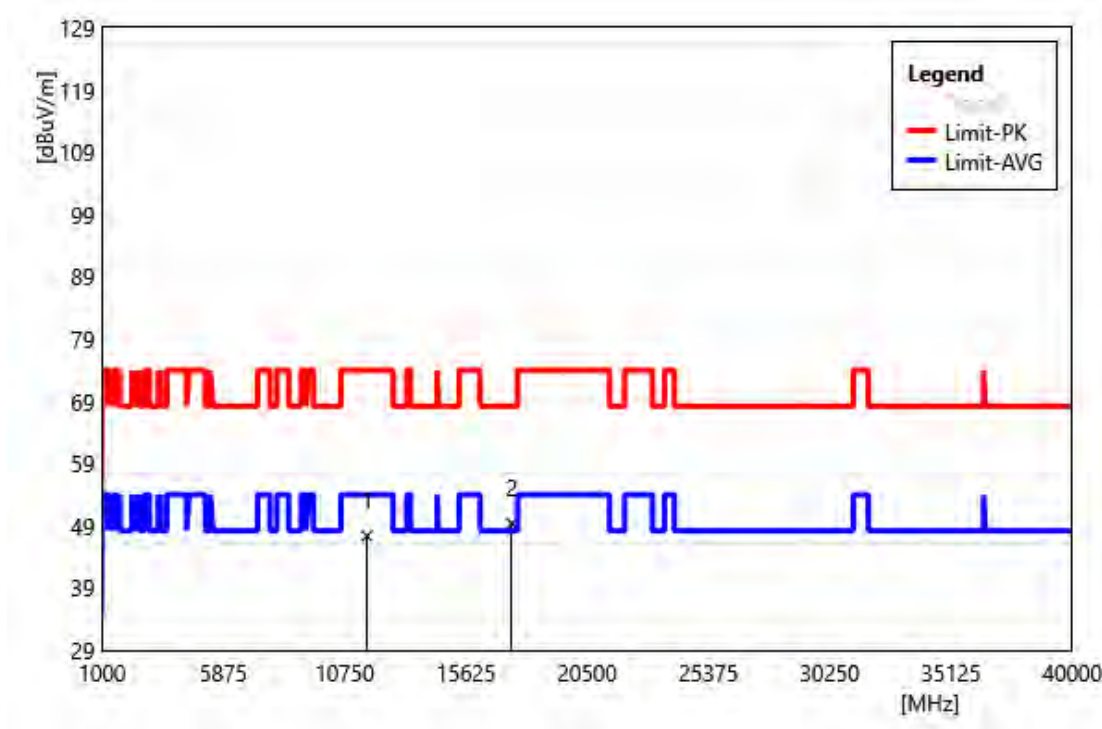


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 39.55           | 7.85                      | 47.39            | 74.00           | -26.61       | PEAK   |
| 2  | 17475.00         | 42.10           | 7.26                      | 49.36            | 68.20           | -18.84       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

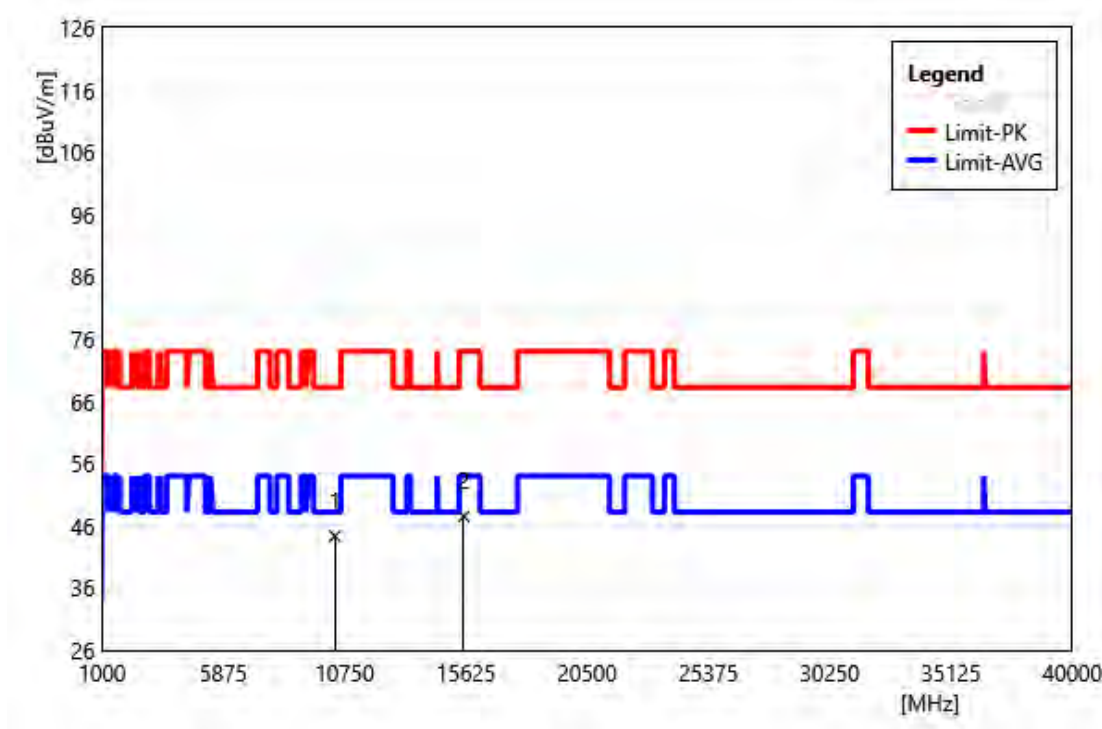


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 37.89           | 6.46                      | 44.35            | 68.20           | -23.85       | PEAK   |
| 2  | 15540.00         | 38.39           | 9.14                      | 47.52            | 74.00           | -26.48       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

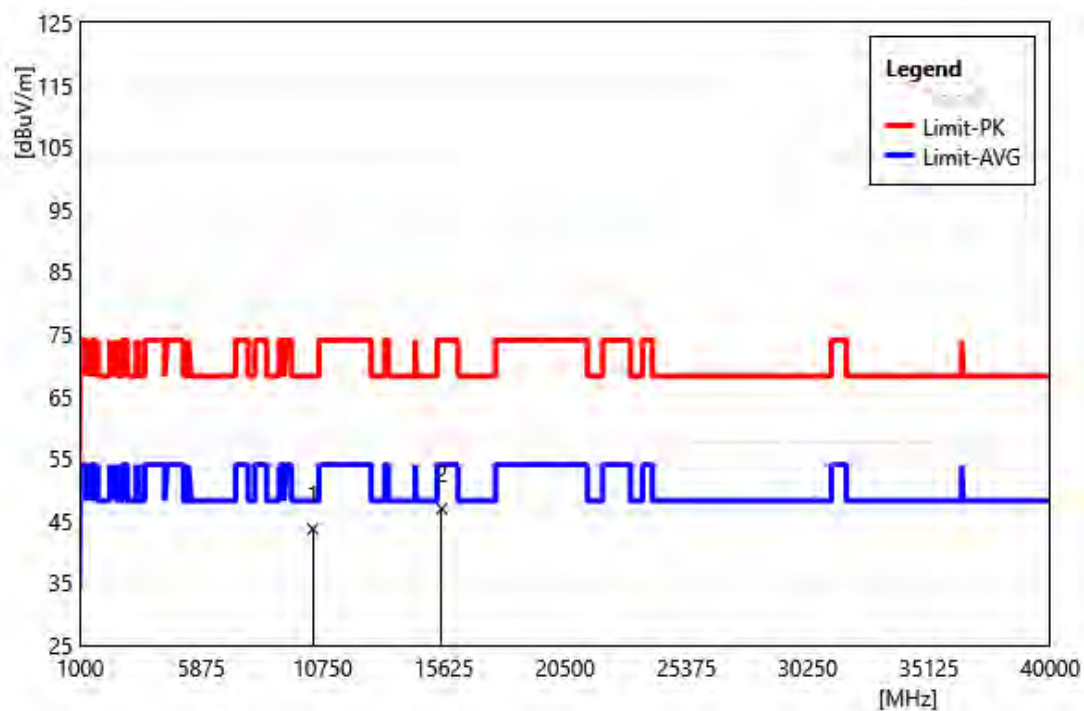


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 37.20           | 6.46                      | 43.67            | 68.20           | -24.53       | PEAK   |
| 2  | 15540.00         | 37.80           | 9.14                      | 46.94            | 74.00           | -27.06       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5200 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

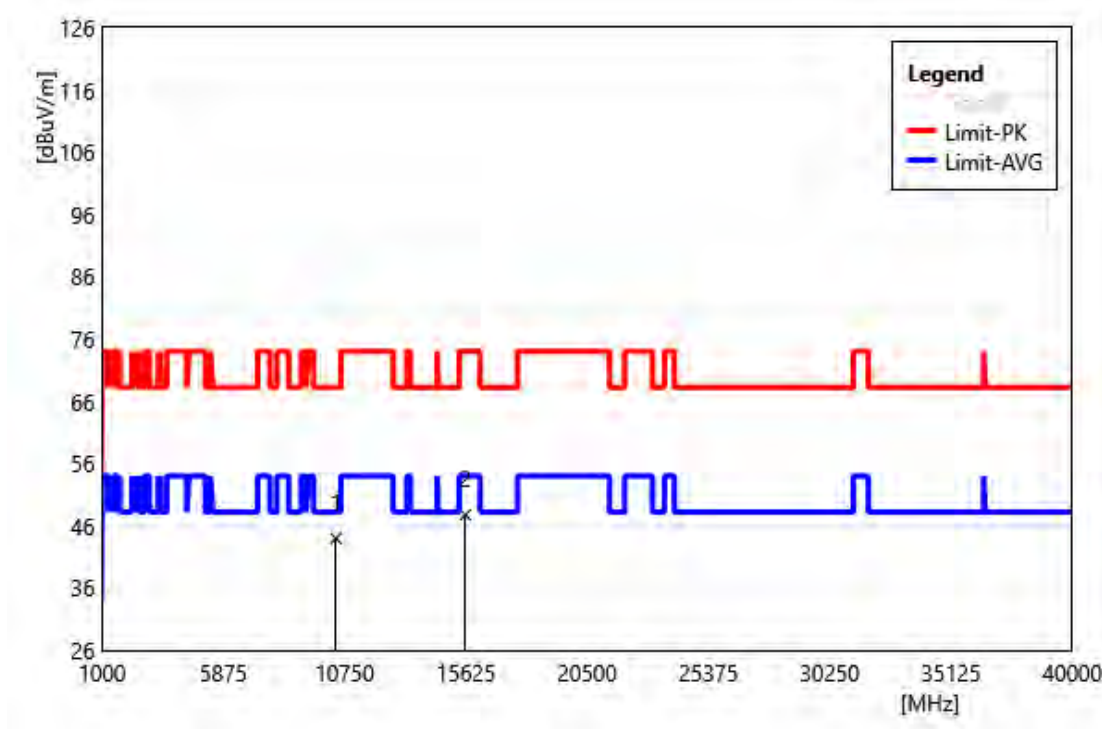


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 37.67           | 6.31                      | 43.99            | 68.20           | -24.21       | PEAK   |
| 2  | 15600.00         | 38.82           | 8.95                      | 47.77            | 74.00           | -26.23       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5200 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

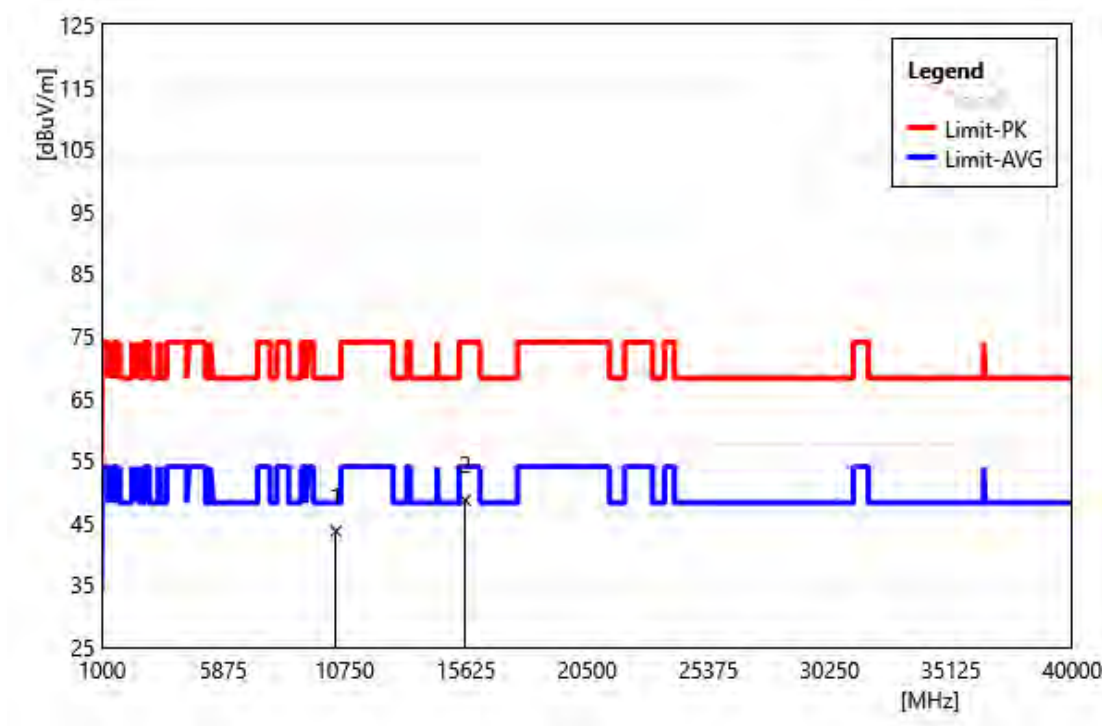


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 37.35           | 6.31                      | 43.66            | 68.20           | -24.54       | PEAK   |
| 2  | 15600.00         | 39.67           | 8.95                      | 48.62            | 74.00           | -25.38       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5240 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

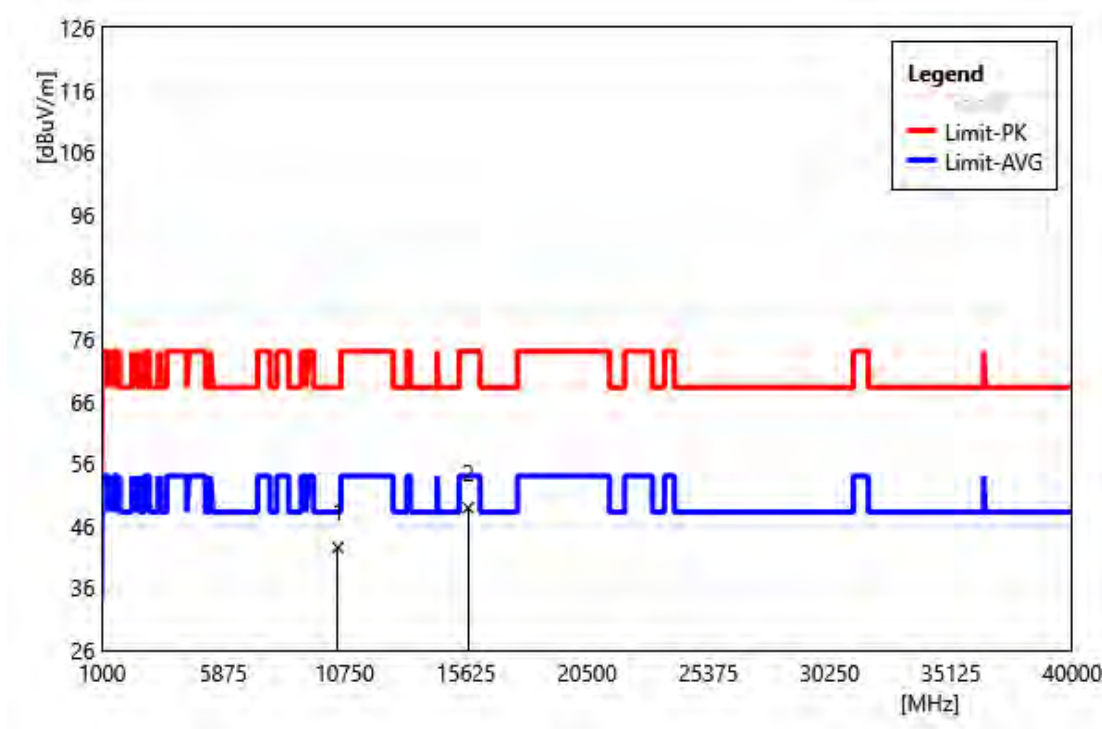


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 36.08           | 6.42                      | 42.50            | 68.20           | -25.70       | PEAK   |
| 2  | 15720.00         | 39.61           | 9.28                      | 48.89            | 74.00           | -25.11       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5240 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

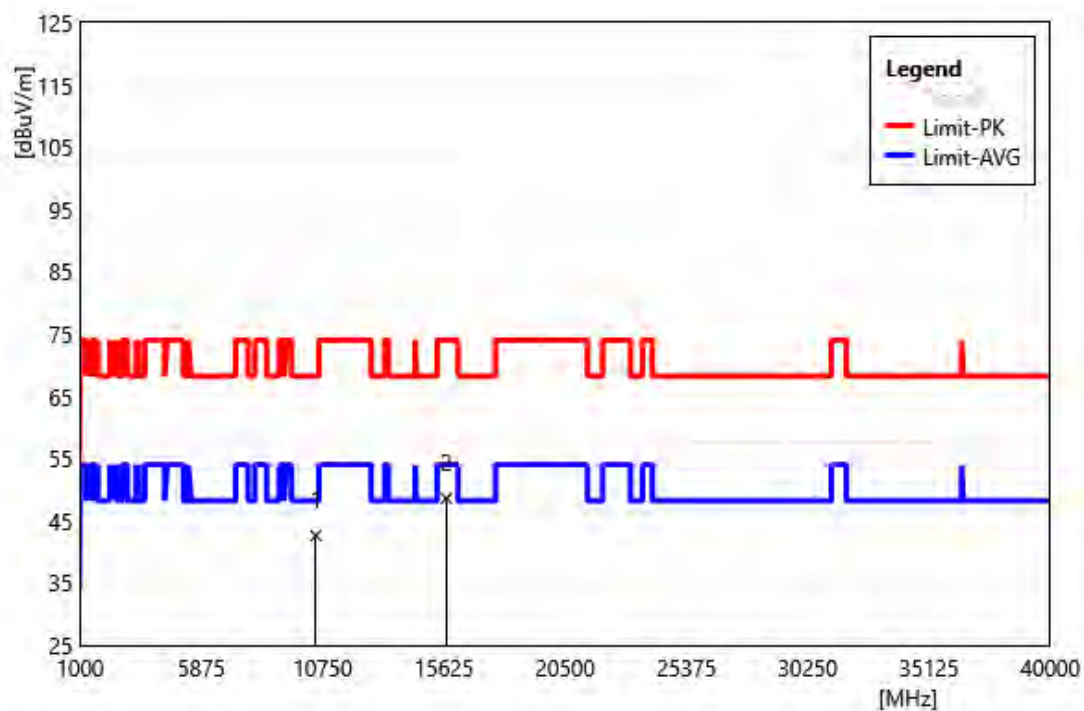


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 36.17           | 6.42                      | 42.59            | 68.20           | -25.61       | PEAK   |
| 2  | 15720.00         | 39.32           | 9.28                      | 48.60            | 74.00           | -25.40       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5260 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

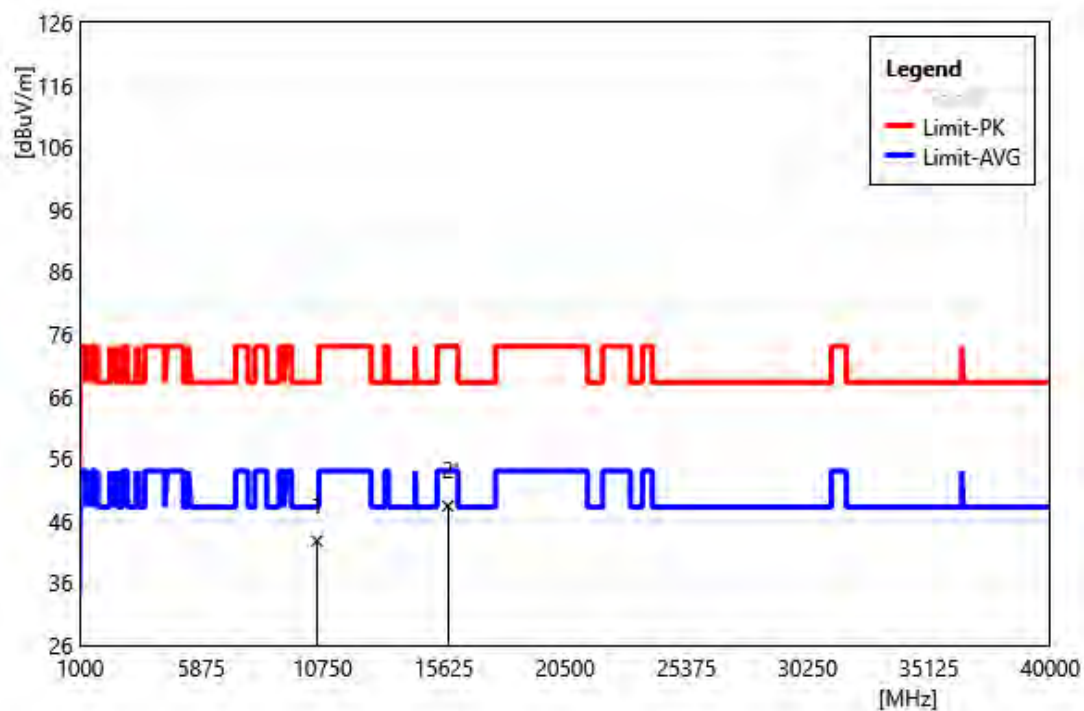


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 36.54           | 6.23                      | 42.77            | 68.20           | -25.43       | PEAK   |
| 2  | 15780.00         | 38.89           | 9.46                      | 48.34            | 74.00           | -25.66       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5260 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

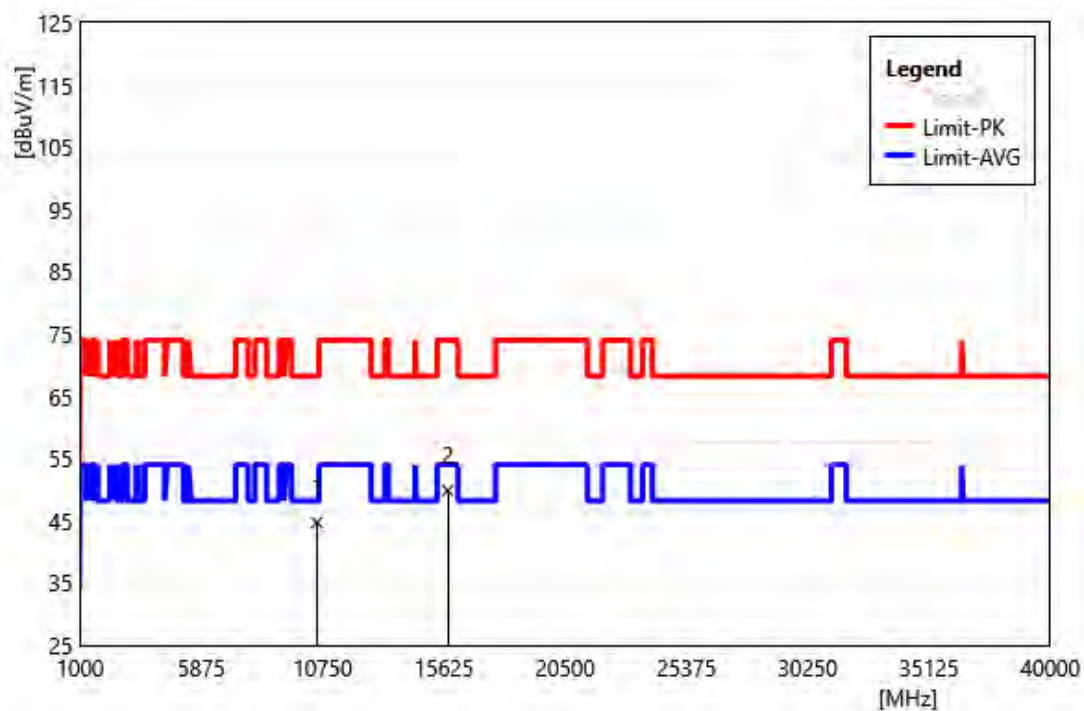


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 38.50           | 6.23                      | 44.73            | 68.20           | -23.47       | PEAK   |
| 2  | 15780.00         | 40.40           | 9.46                      | 49.86            | 74.00           | -24.14       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5280 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

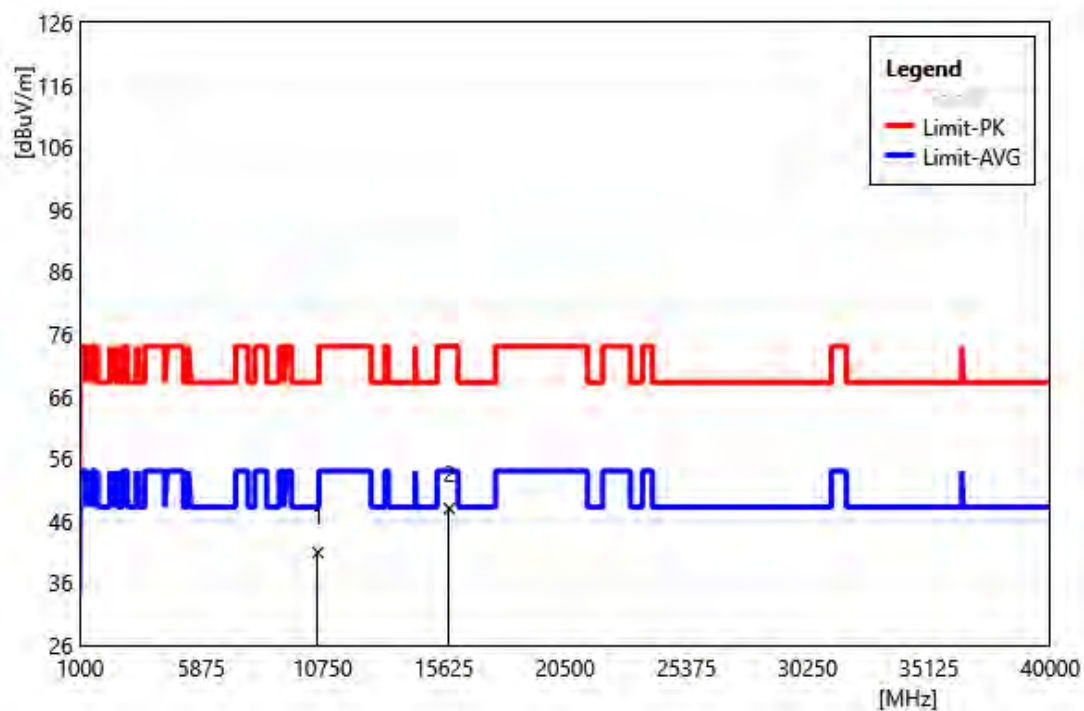


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 34.56           | 6.33                      | 40.89            | 68.20           | -27.31       | PEAK   |
| 2  | 15840.00         | 38.53           | 9.44                      | 47.96            | 74.00           | -26.04       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5280 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

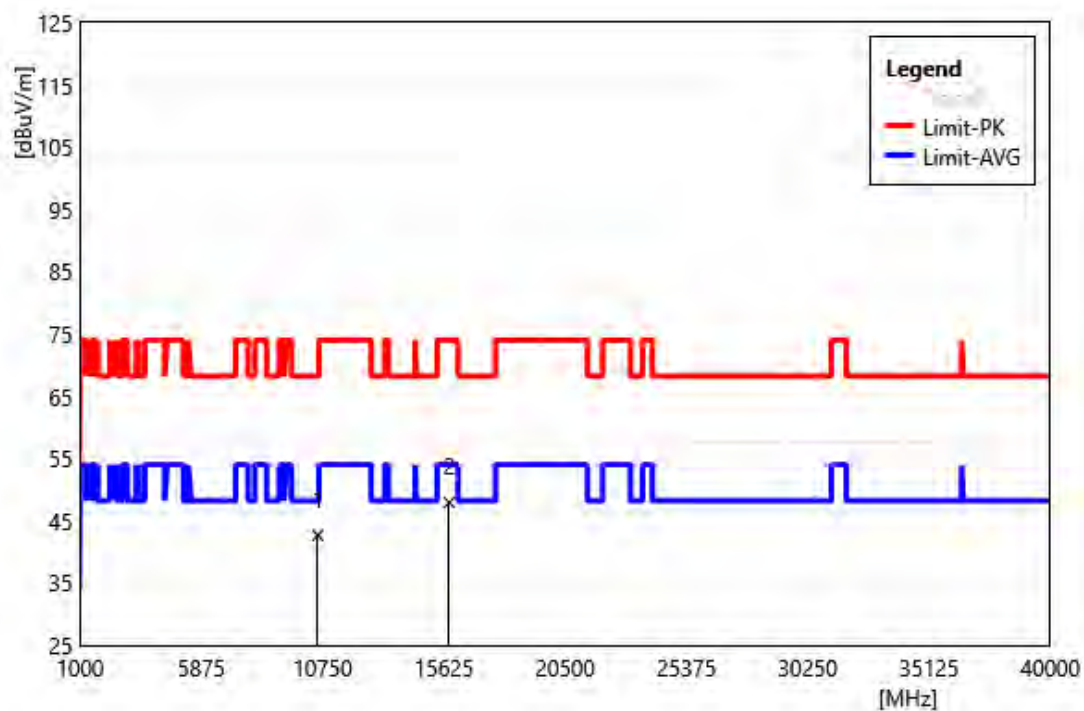


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 36.34           | 6.33                      | 42.67            | 68.20           | -25.53       | PEAK   |
| 2  | 15840.00         | 38.46           | 9.44                      | 47.90            | 74.00           | -26.10       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

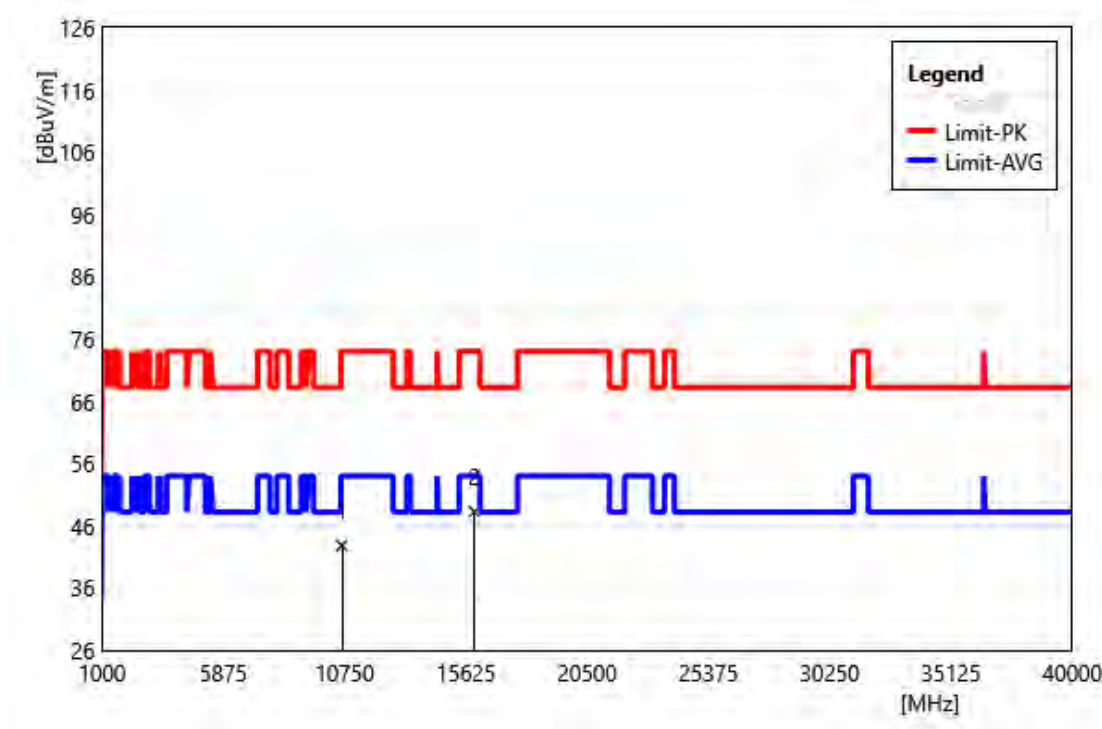


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 36.70           | 6.13                      | 42.83            | 74.00           | -31.17       | PEAK   |
| 2  | 15960.00         | 38.53           | 9.73                      | 48.26            | 74.00           | -25.74       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

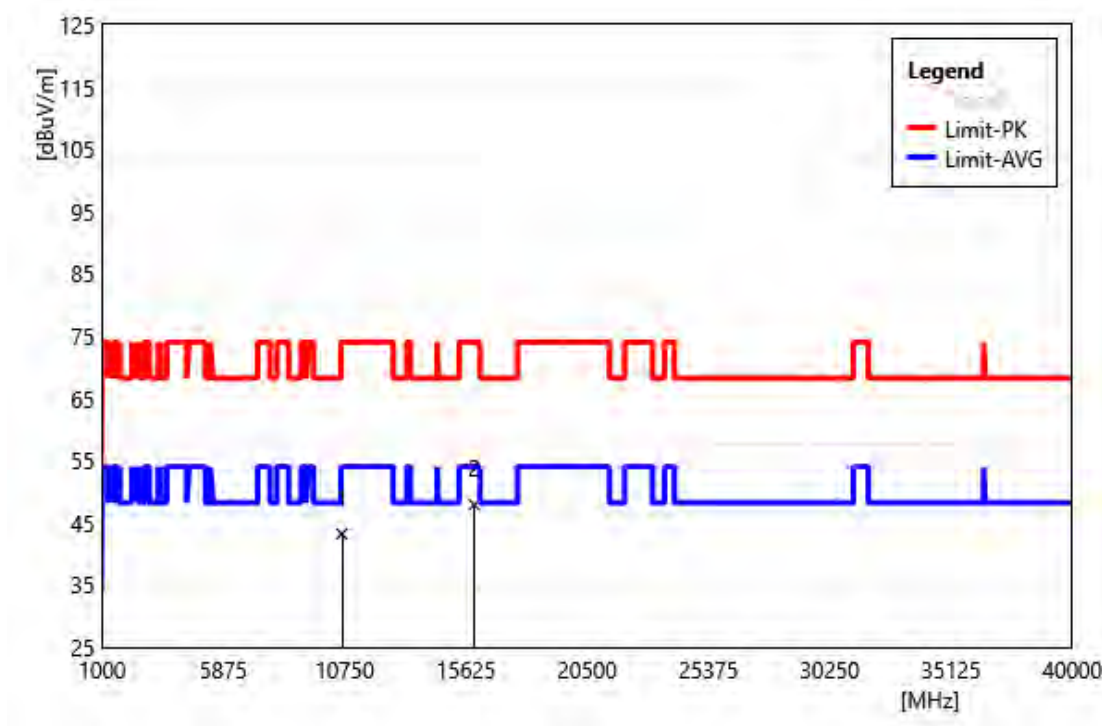


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 37.08           | 6.13                      | 43.21            | 74.00           | -30.79       | PEAK   |
| 2  | 15960.00         | 38.18           | 9.73                      | 47.91            | 74.00           | -26.09       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

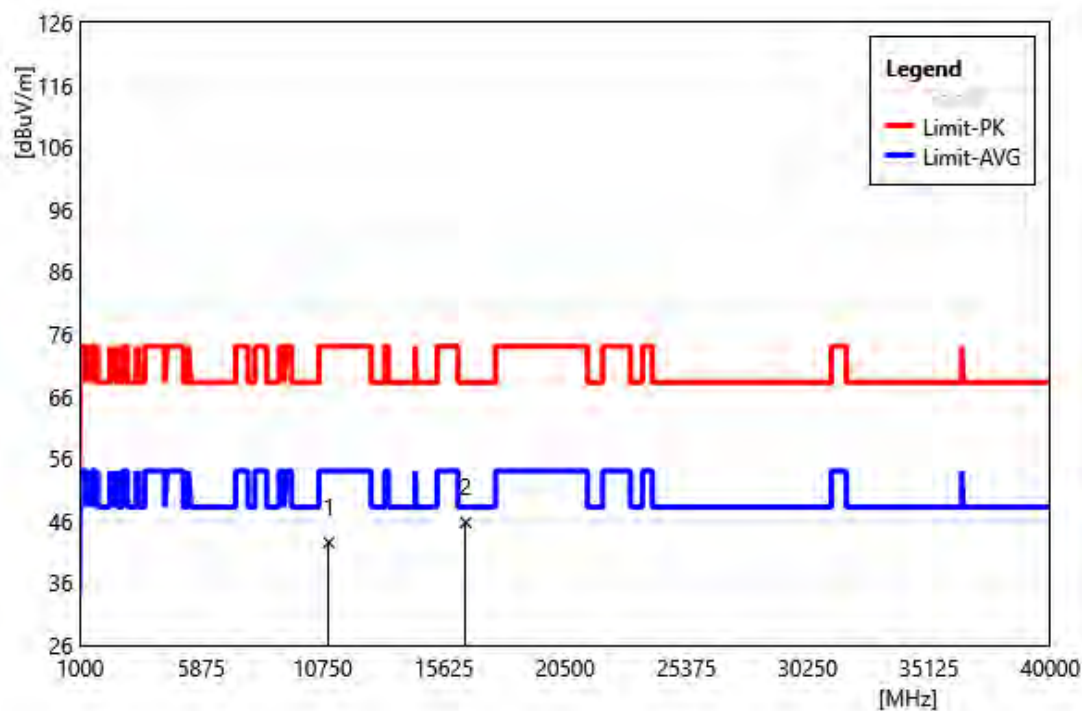


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 36.45           | 6.05                      | 42.50            | 74.00           | -31.50       | PEAK   |
| 2  | 16500.00         | 37.36           | 8.37                      | 45.73            | 68.20           | -22.47       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

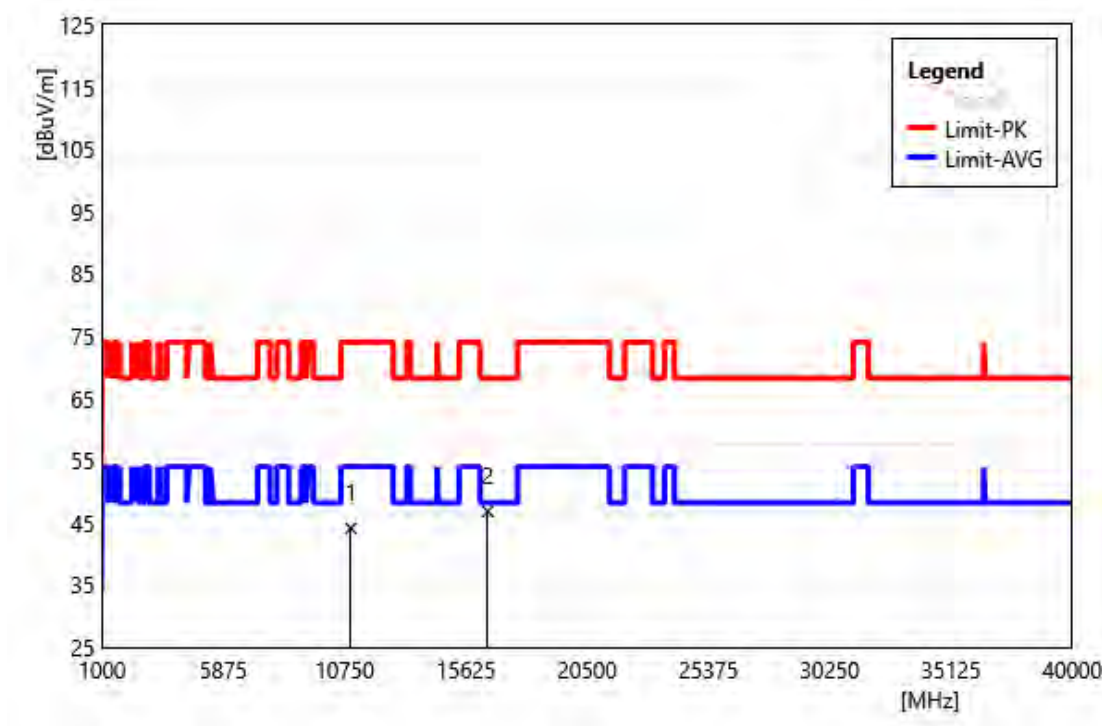


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 38.05           | 6.05                      | 44.10            | 74.00           | -29.90       | PEAK   |
| 2  | 16500.00         | 38.45           | 8.37                      | 46.82            | 68.20           | -21.38       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5560 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

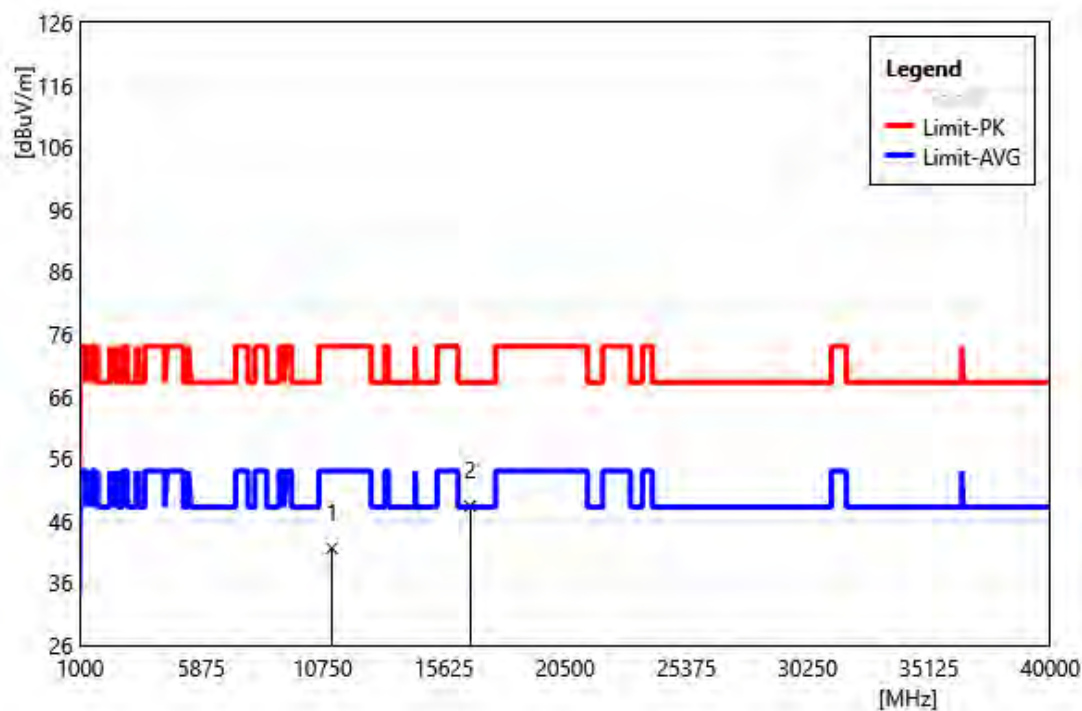


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 34.91           | 6.69                      | 41.60            | 74.00           | -32.40       | PEAK   |
| 2  | 16680.00         | 40.14           | 8.22                      | 48.36            | 68.20           | -19.84       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5560 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

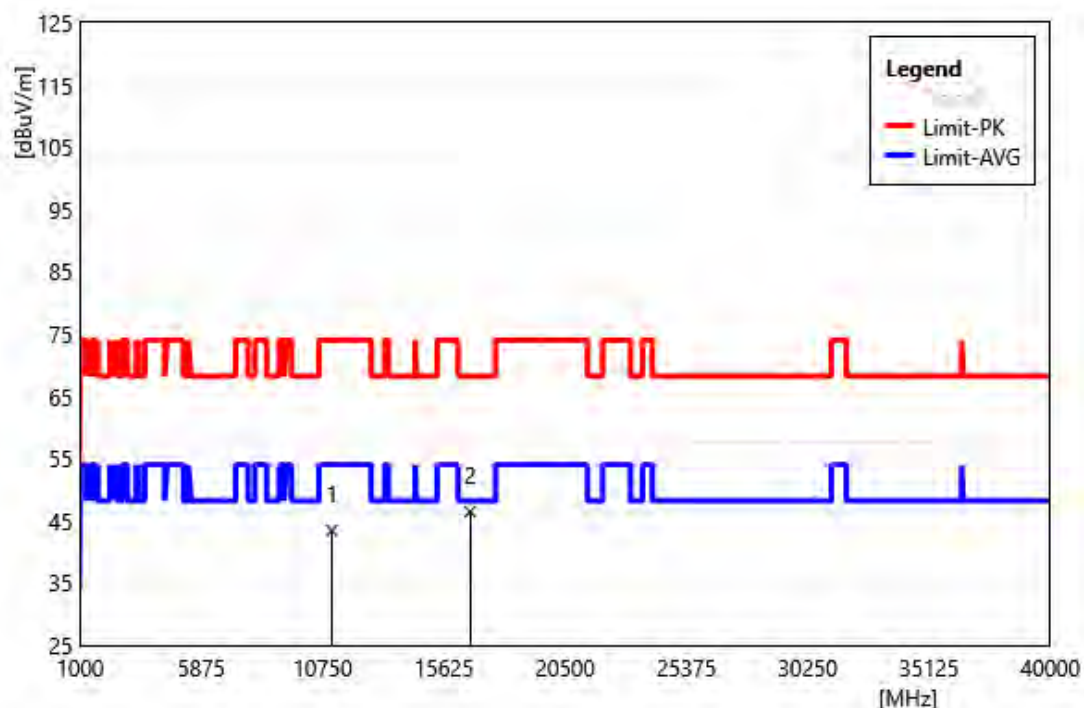


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 36.77           | 6.69                      | 43.47            | 74.00           | -30.53       | PEAK   |
| 2  | 16680.00         | 38.23           | 8.22                      | 46.45            | 68.20           | -21.75       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5700 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

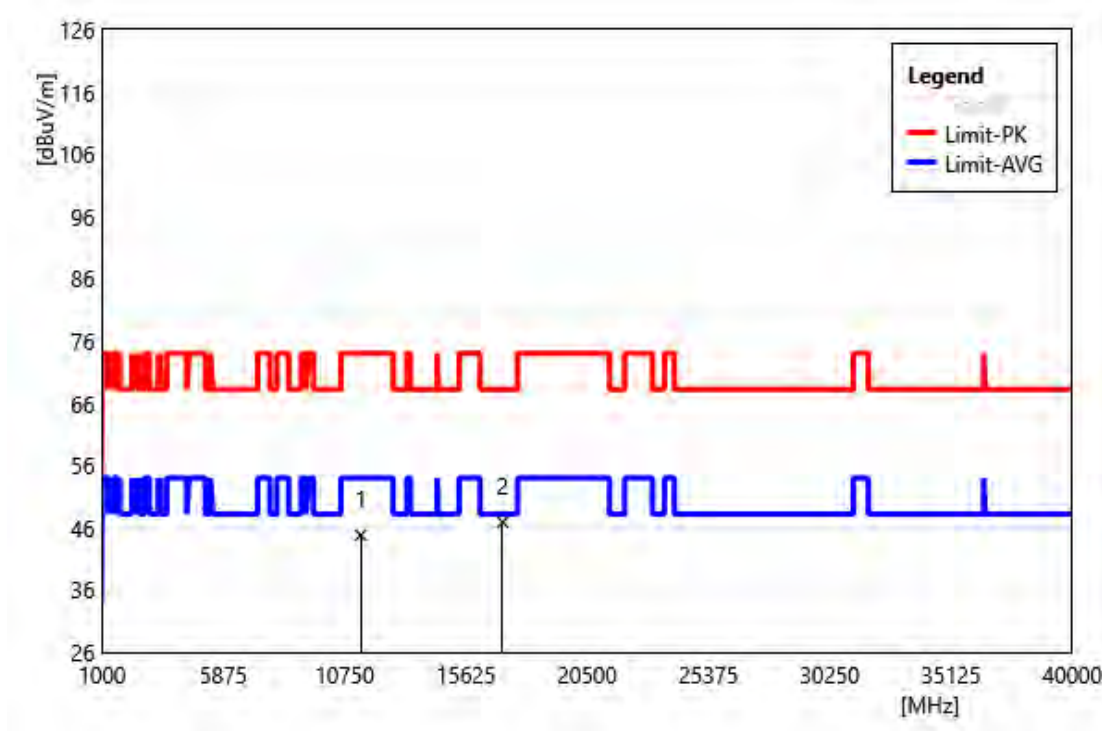


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 37.69           | 7.13                      | 44.82            | 74.00           | -29.18       | PEAK   |
| 2  | 17100.00         | 39.05           | 7.85                      | 46.89            | 68.20           | -21.31       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5700 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

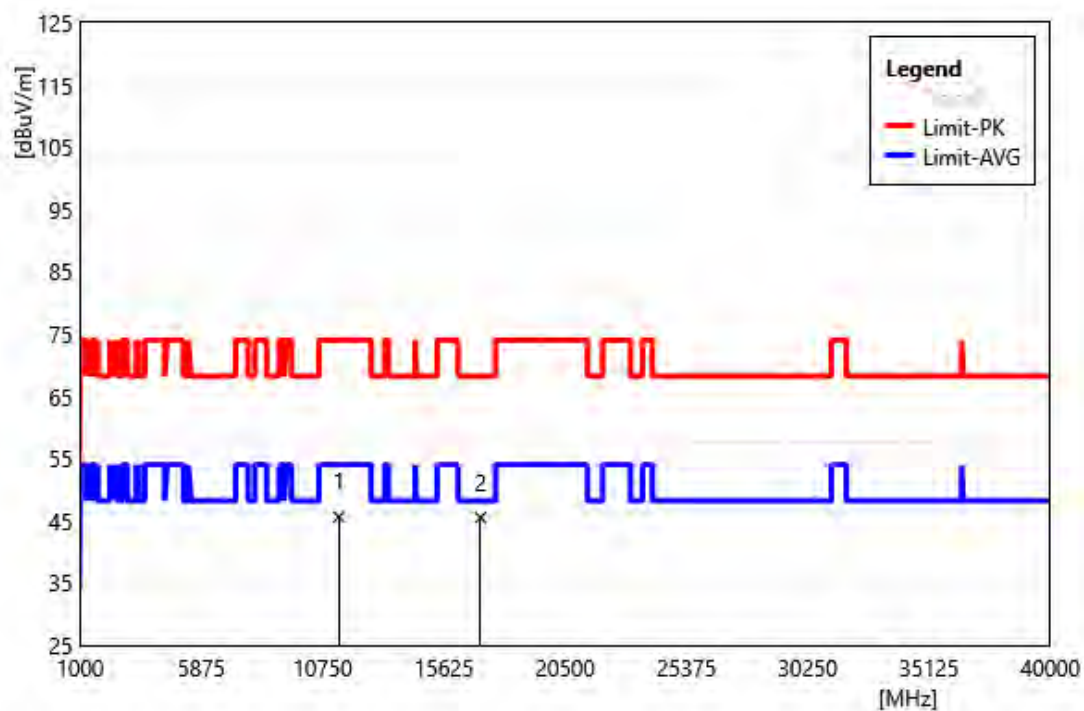


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 38.47           | 7.13                      | 45.61            | 74.00           | -28.39       | PEAK   |
| 2  | 17100.00         | 37.66           | 7.85                      | 45.50            | 68.20           | -22.70       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5745 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

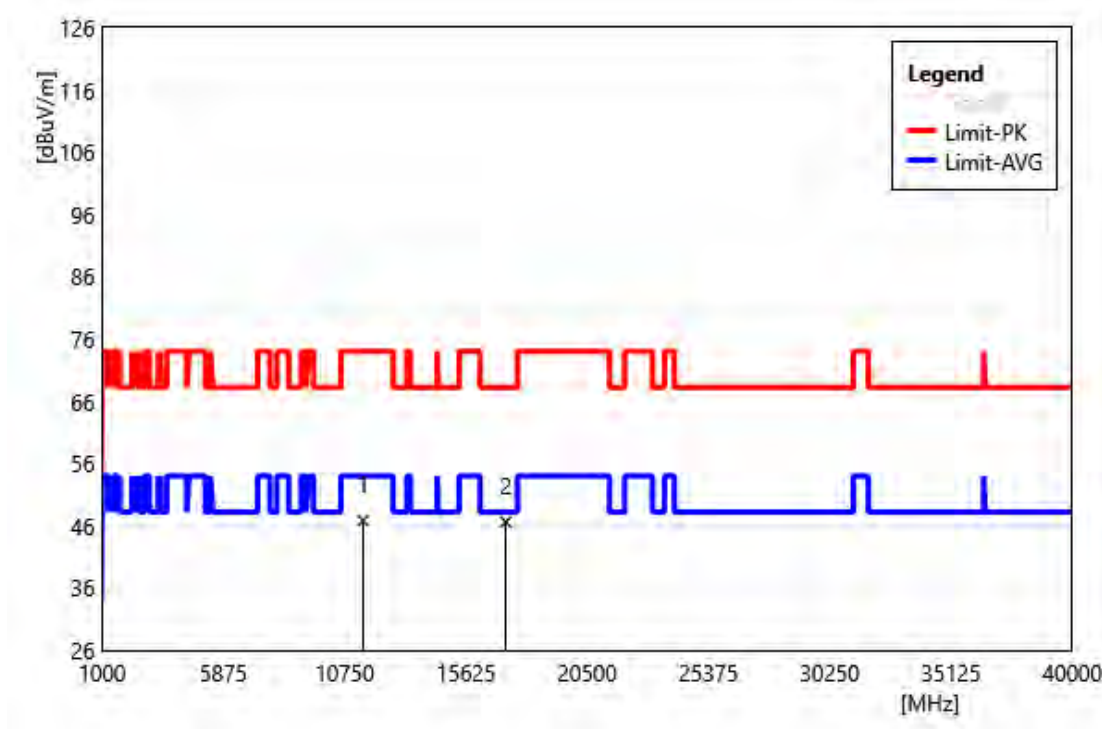


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 39.50           | 7.35                      | 46.84            | 74.00           | -27.16       | PEAK   |
| 2  | 17235.00         | 39.02           | 7.59                      | 46.61            | 68.20           | -21.59       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5745 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

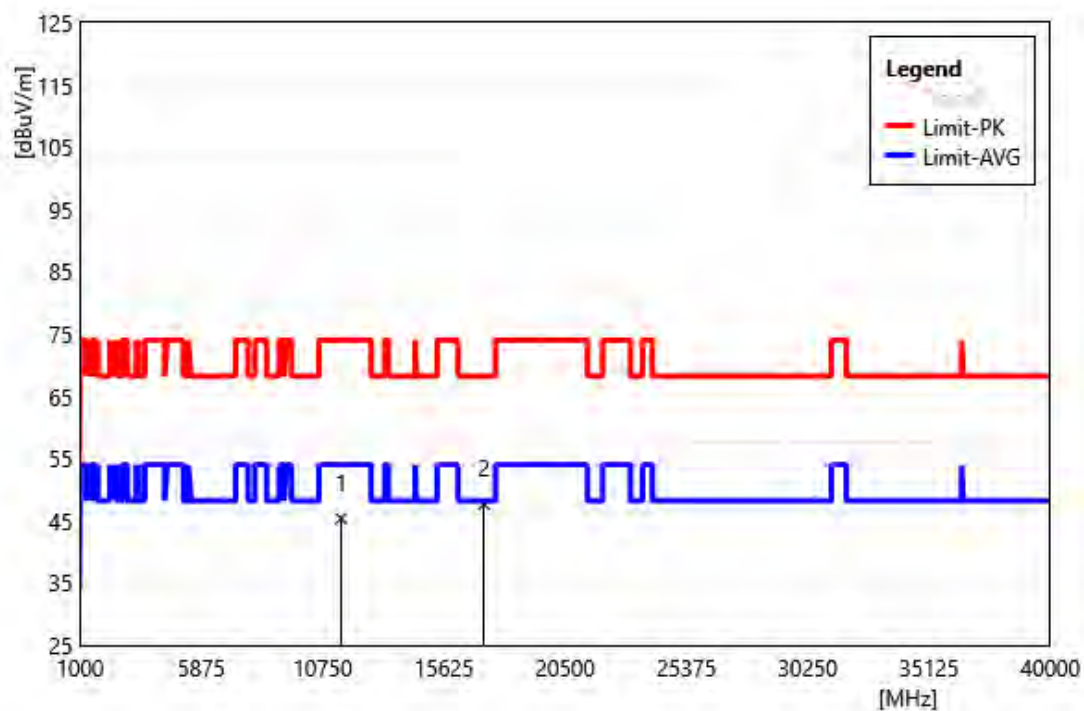


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 38.03           | 7.35                      | 45.38            | 74.00           | -28.62       | PEAK   |
| 2  | 17235.00         | 40.04           | 7.59                      | 47.63            | 68.20           | -20.57       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5785 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

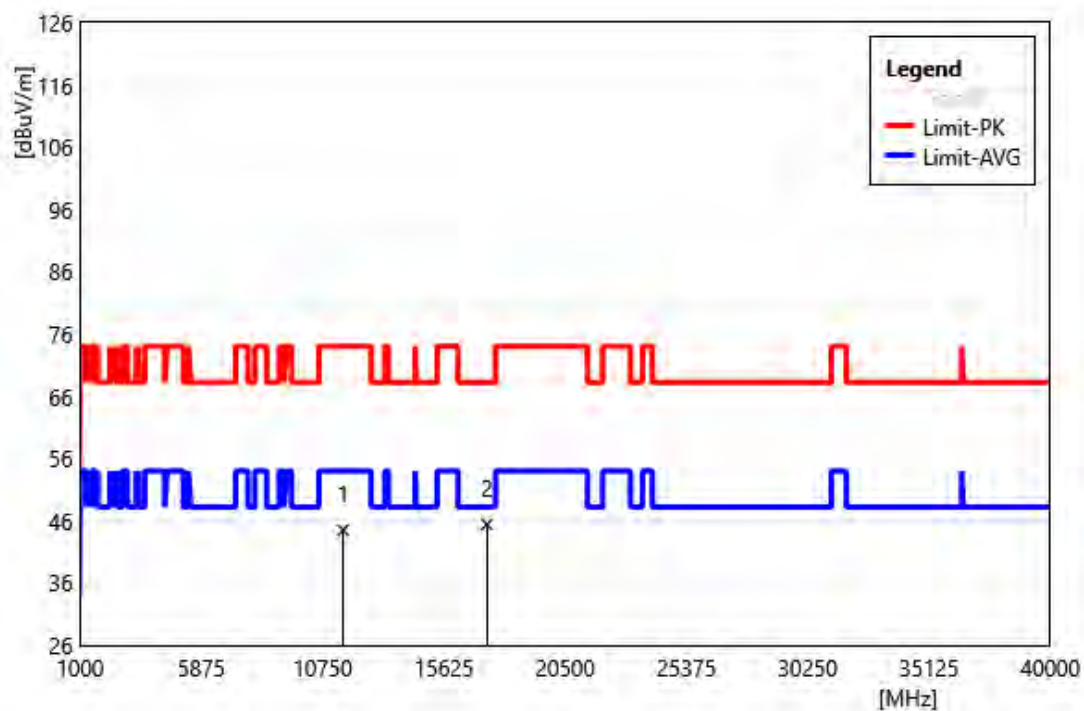


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 36.94           | 7.59                      | 44.53            | 74.00           | -29.47       | PEAK   |
| 2  | 17355.00         | 38.47           | 6.95                      | 45.42            | 68.20           | -22.78       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5785 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

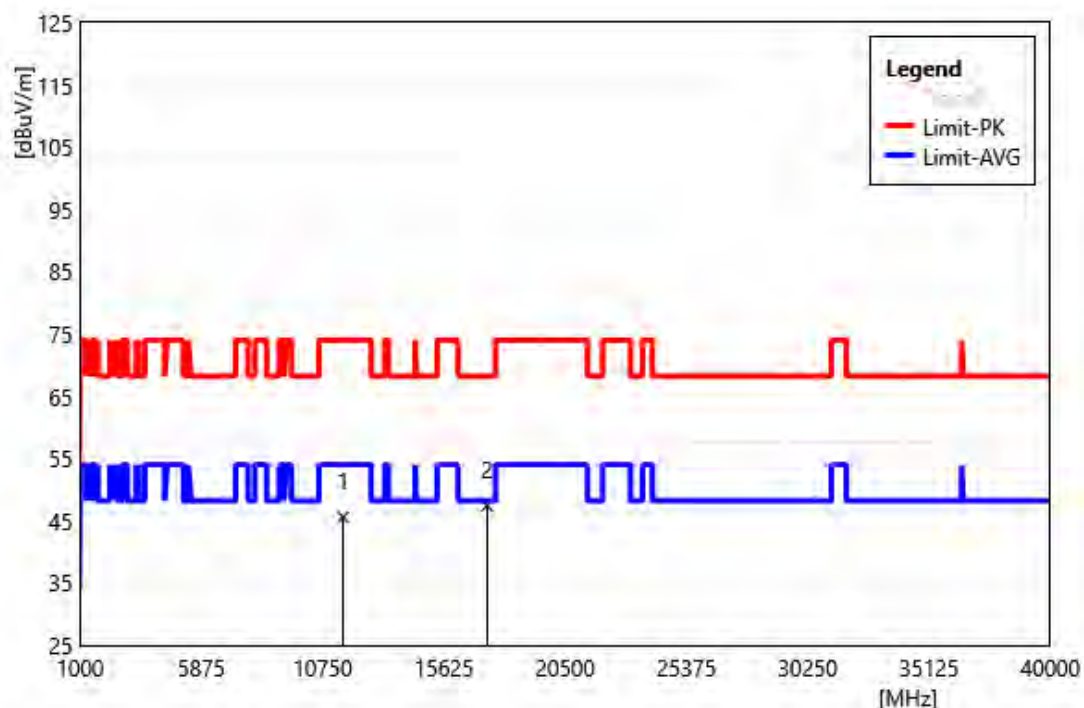


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 37.96           | 7.59                      | 45.54            | 74.00           | -28.46       | PEAK   |
| 2  | 17355.00         | 40.47           | 6.95                      | 47.42            | 68.20           | -20.78       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5825 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

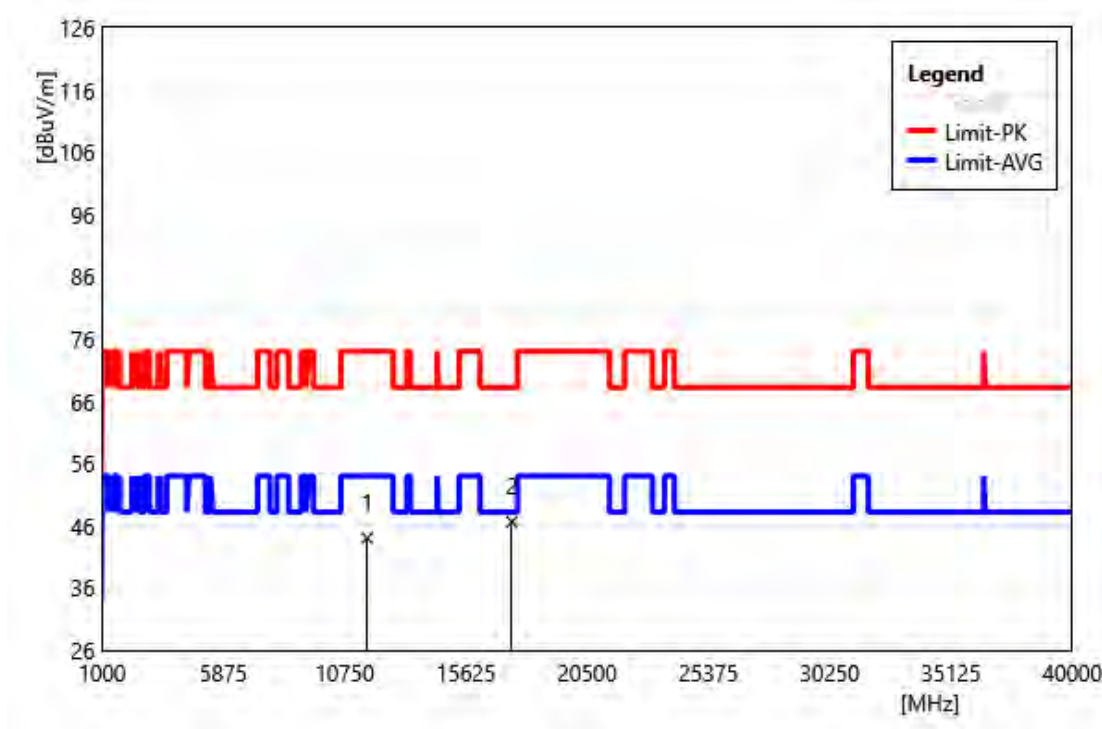


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 36.18           | 7.85                      | 44.02            | 74.00           | -29.98       | PEAK   |
| 2  | 17475.00         | 39.38           | 7.26                      | 46.64            | 68.20           | -21.56       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5825 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

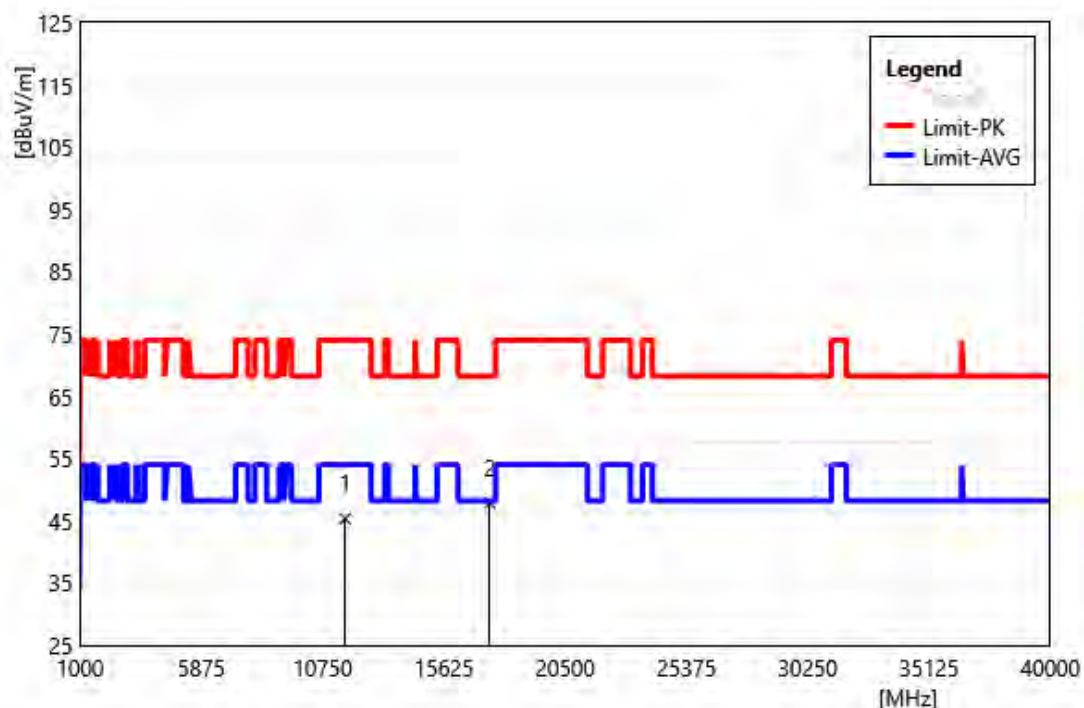


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 37.48           | 7.85                      | 45.32            | 74.00           | -28.68       | PEAK   |
| 2  | 17475.00         | 40.56           | 7.26                      | 47.82            | 68.20           | -20.38       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

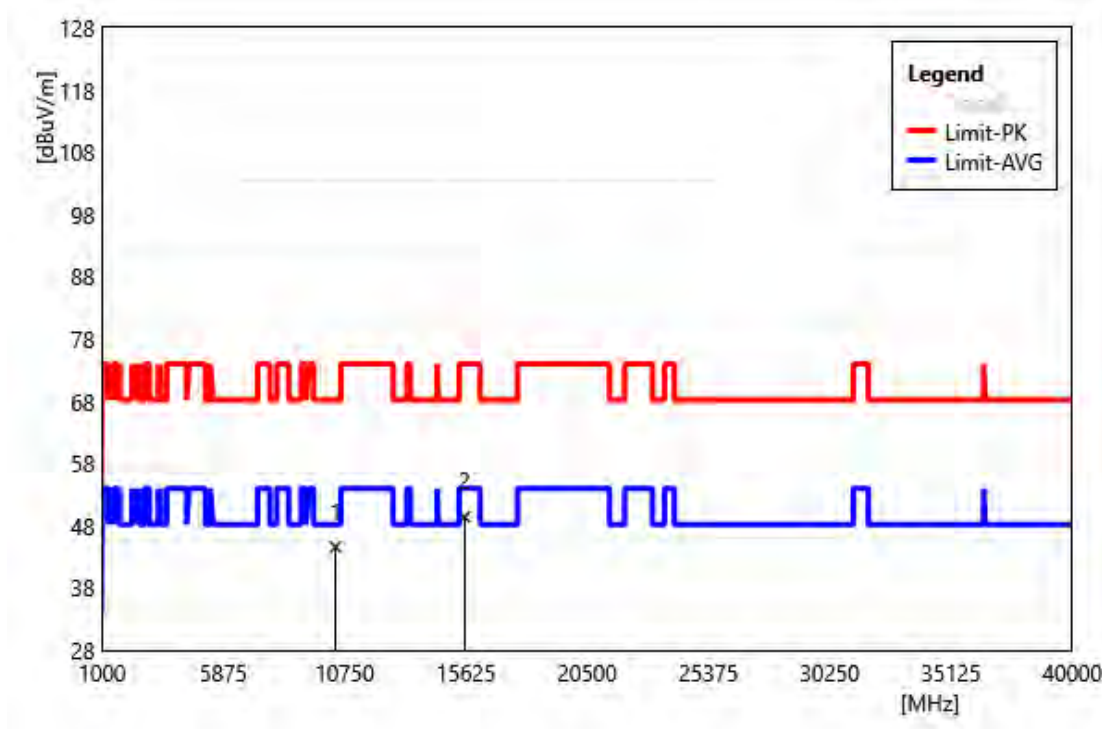


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10380.00         | 38.23           | 6.37                      | 44.61            | 68.20           | -23.59       | PEAK   |
| 2  | 15570.00         | 40.48           | 8.94                      | 49.42            | 74.00           | -24.58       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

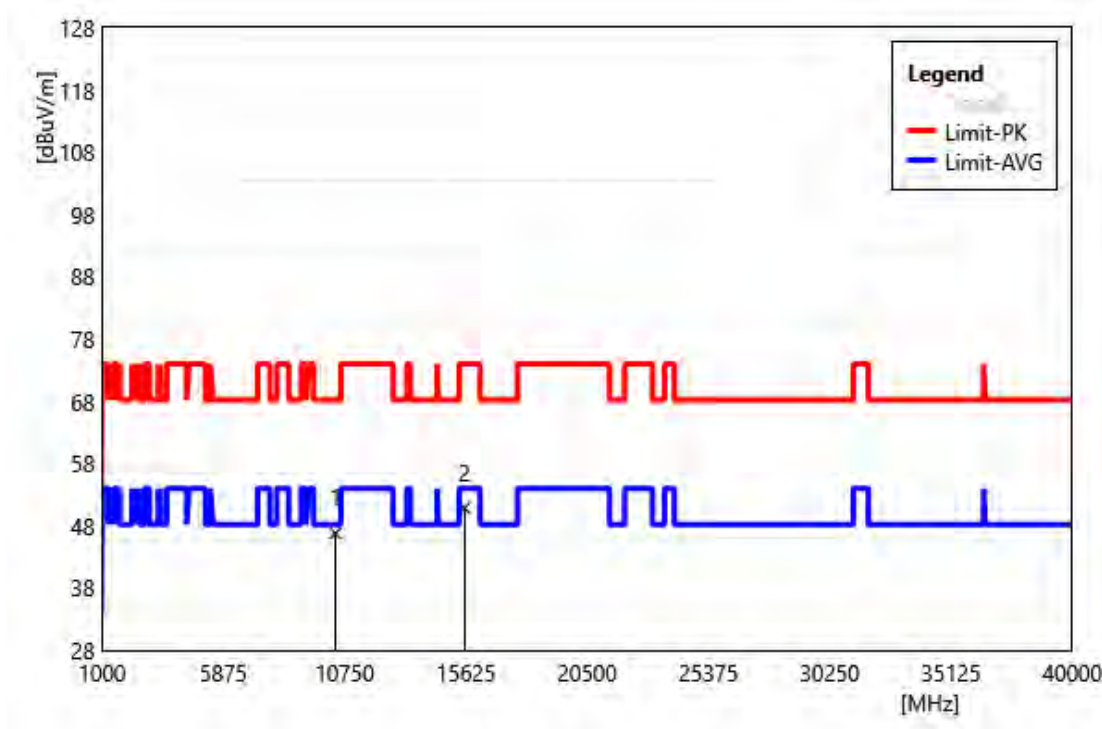


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10380.00         | 40.40           | 6.37                      | 46.78            | 68.20           | -21.42       | PEAK   |
| 2  | 15570.00         | 41.92           | 8.94                      | 50.86            | 74.00           | -23.14       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5230 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

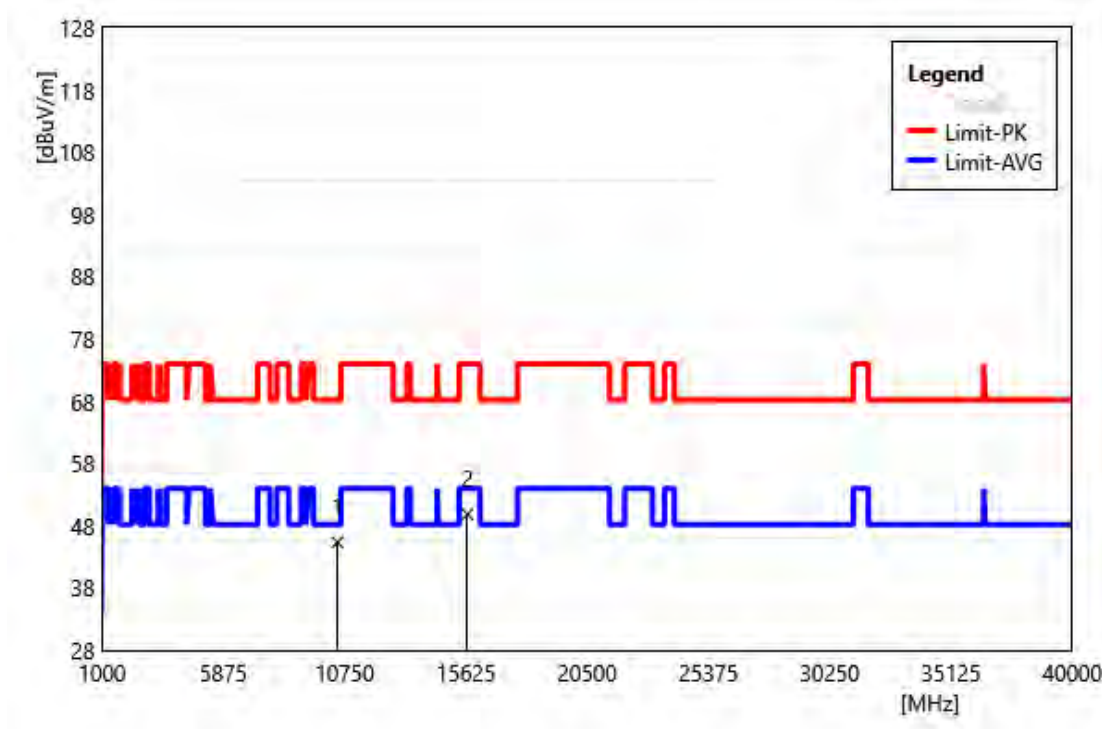


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10460.00         | 39.11           | 6.23                      | 45.34            | 68.20           | -22.86       | PEAK   |
| 2  | 15690.00         | 40.71           | 9.14                      | 49.85            | 74.00           | -24.15       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5230 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

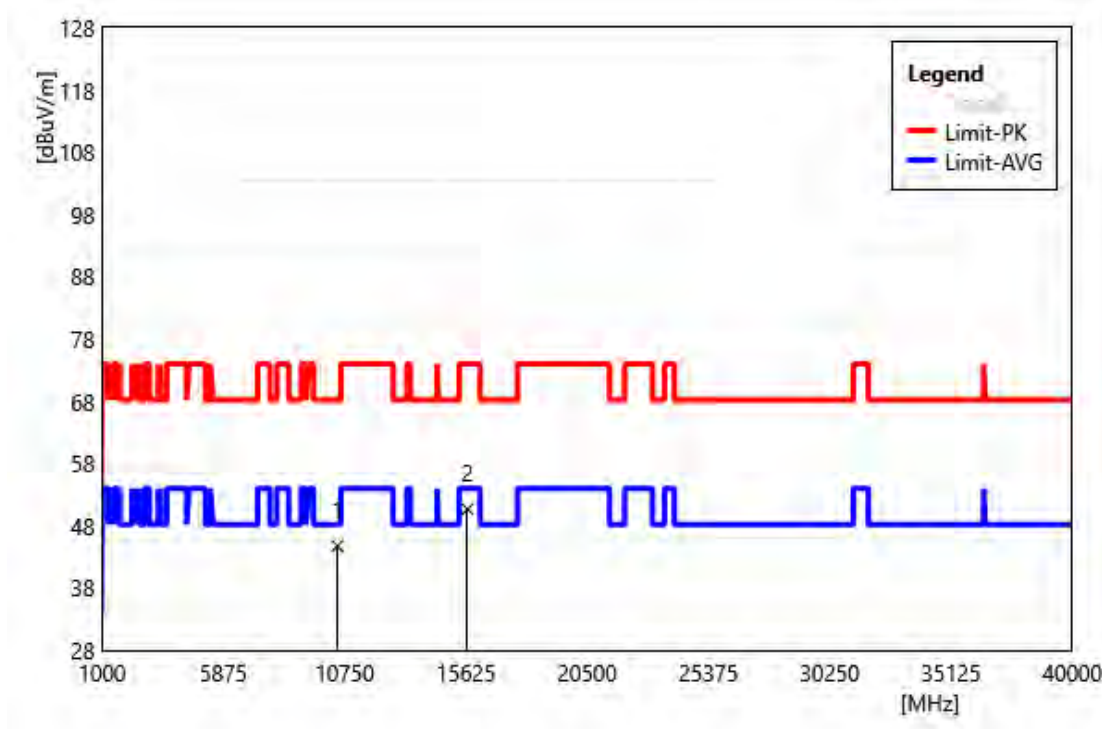


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10460.00         | 38.51           | 6.23                      | 44.74            | 68.20           | -23.46       | PEAK   |
| 2  | 15690.00         | 41.53           | 9.14                      | 50.67            | 74.00           | -23.33       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5270 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

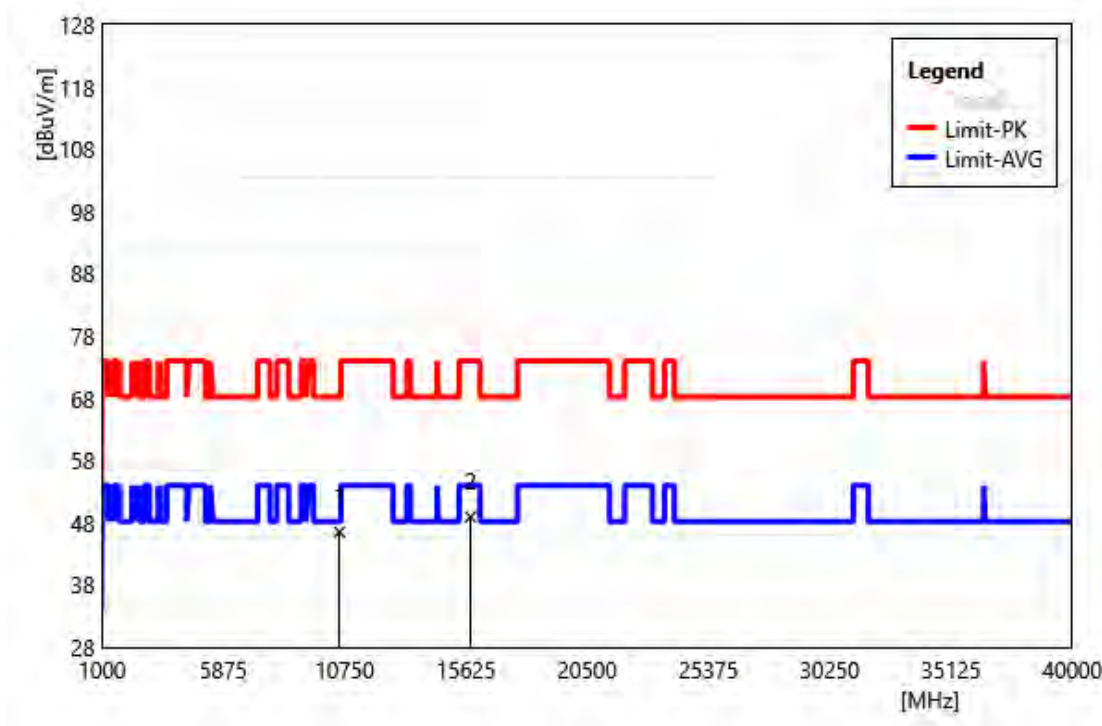


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10540.00         | 40.39           | 6.11                      | 46.50            | 68.20           | -21.70       | PEAK   |
| 2  | 15810.00         | 39.48           | 9.43                      | 48.91            | 74.00           | -25.09       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5270 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

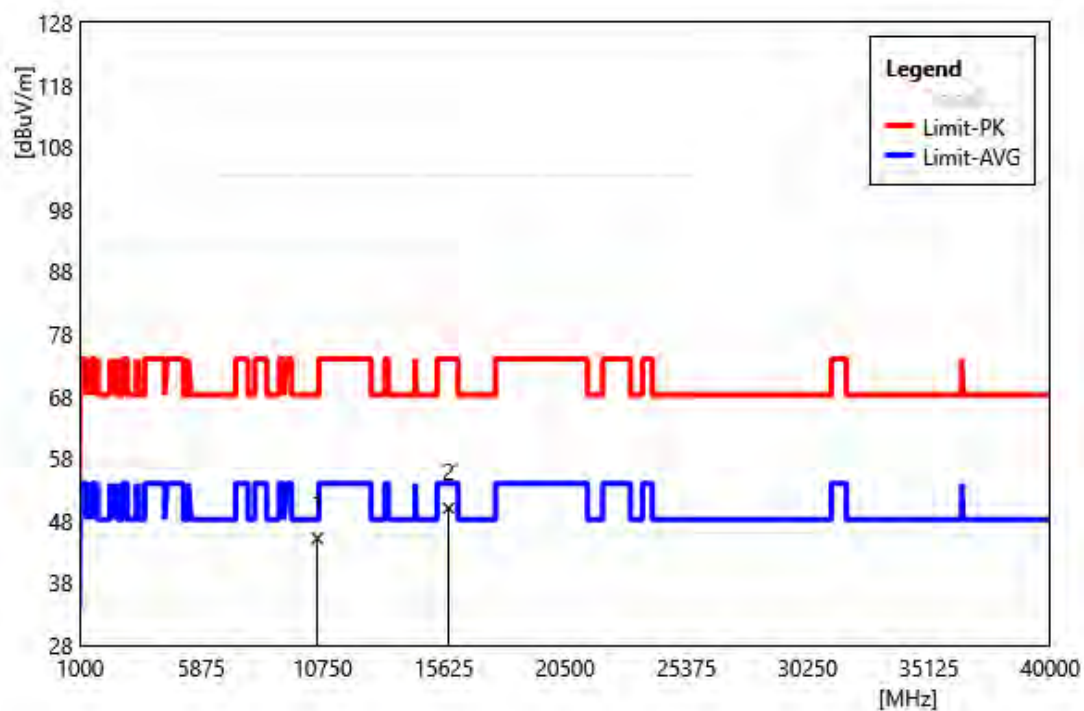


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10540.00         | 39.08           | 6.11                      | 45.19            | 68.20           | -23.01       | PEAK   |
| 2  | 15810.00         | 40.59           | 9.43                      | 50.02            | 74.00           | -23.98       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

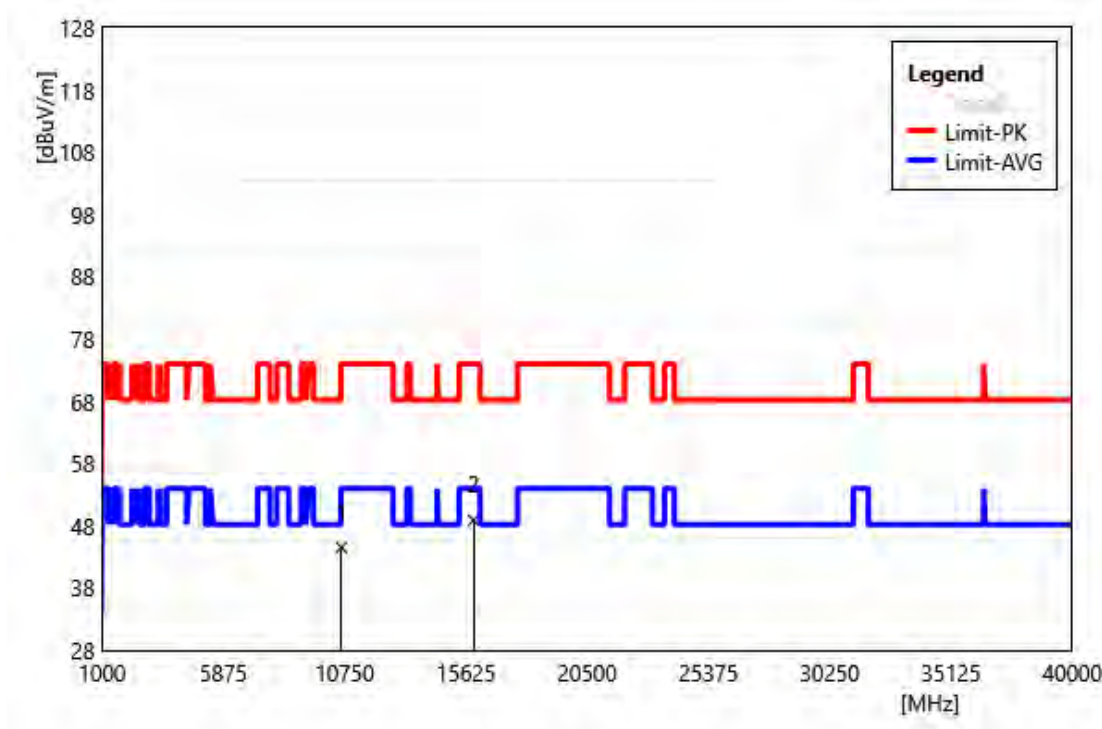


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10620.00         | 38.33           | 6.18                      | 44.51            | 74.00           | -29.49       | PEAK   |
| 2  | 15930.00         | 39.44           | 9.45                      | 48.89            | 74.00           | -25.11       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

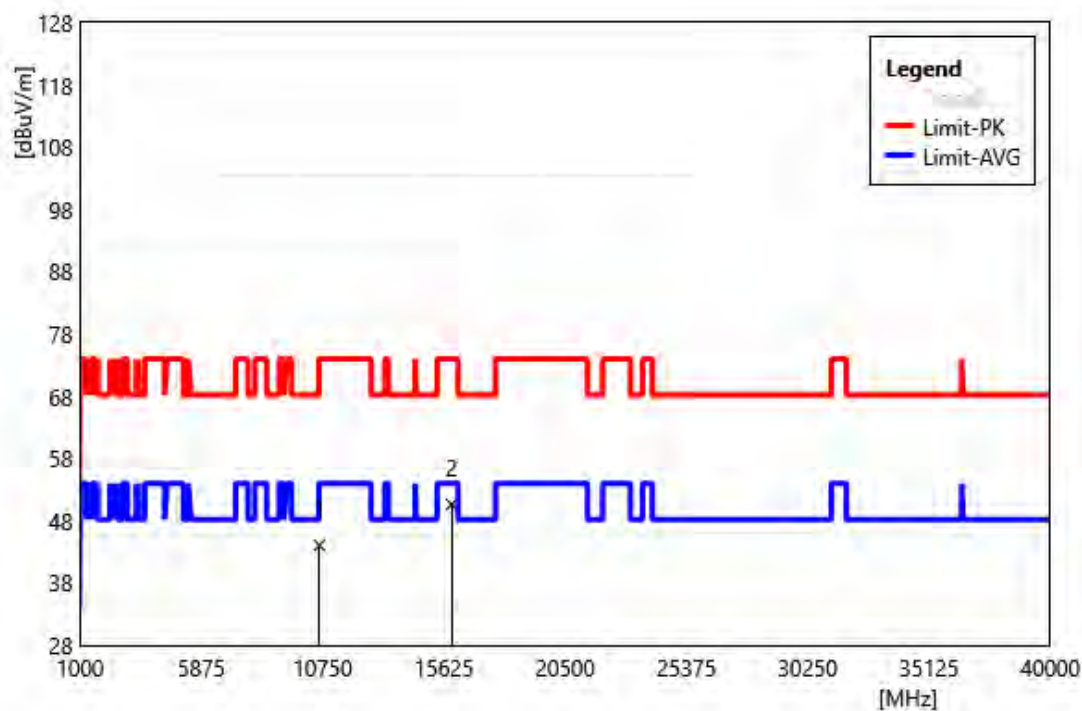


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10620.00         | 37.89           | 6.18                      | 44.08            | 74.00           | -29.92       | PEAK   |
| 2  | 15930.00         | 41.19           | 9.45                      | 50.64            | 74.00           | -23.36       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

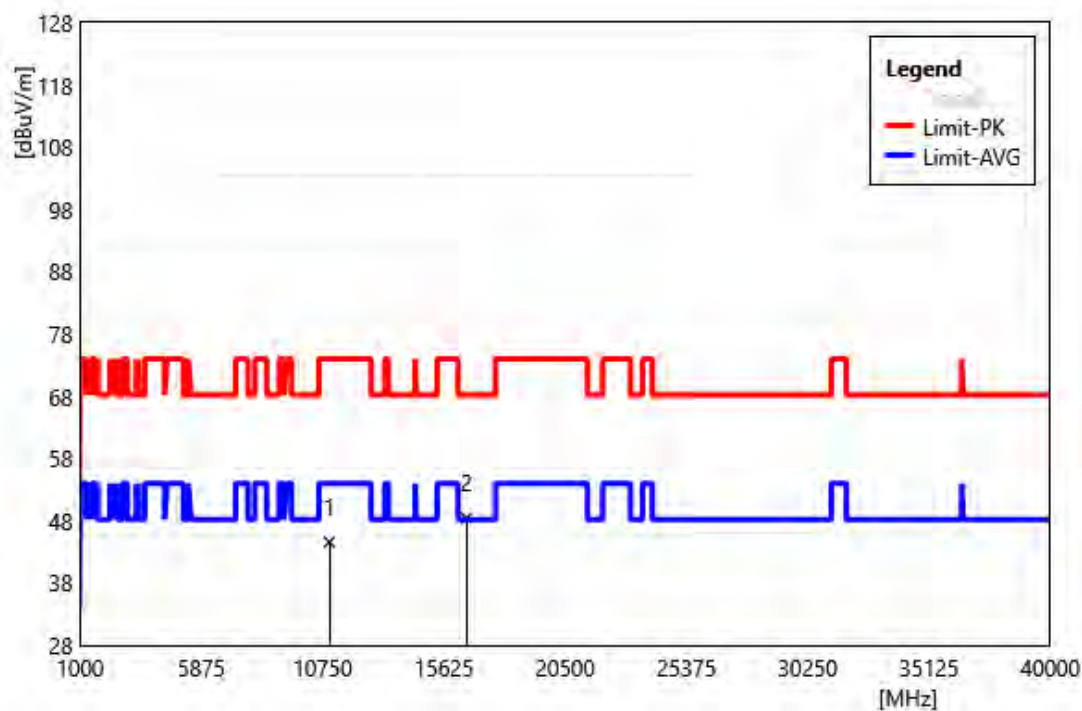


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11020.00         | 38.36           | 6.21                      | 44.57            | 74.00           | -29.43       | PEAK   |
| 2  | 16530.00         | 39.98           | 8.47                      | 48.45            | 68.20           | -19.75       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

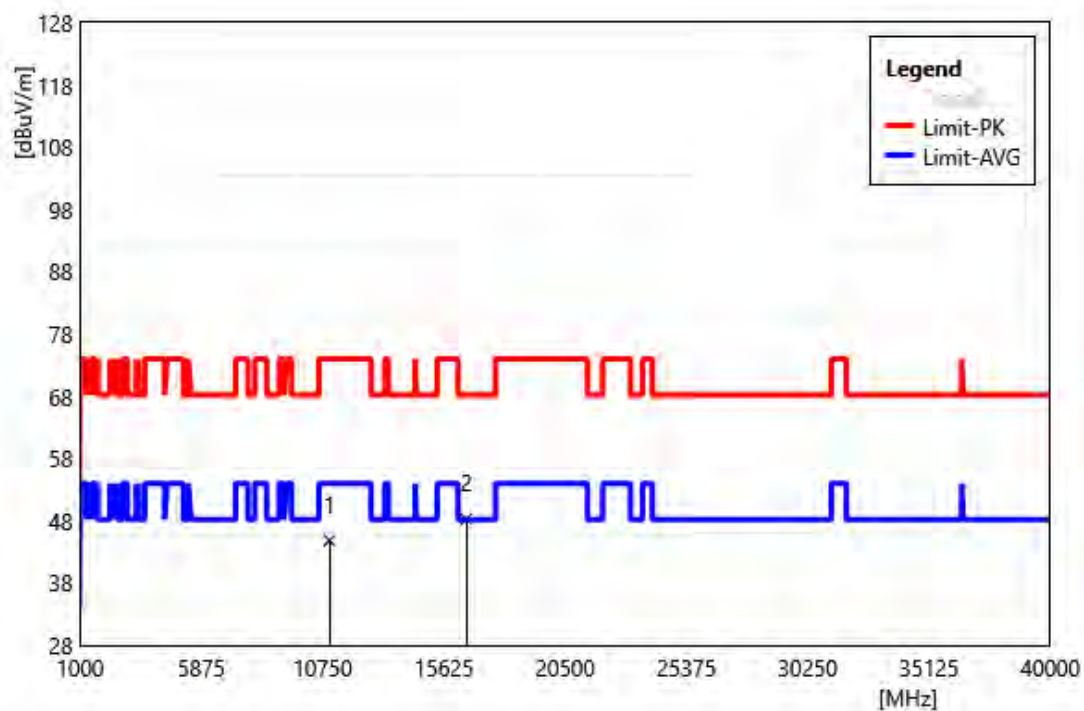


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11020.00         | 38.62           | 6.21                      | 44.83            | 74.00           | -29.17       | PEAK   |
| 2  | 16530.00         | 39.79           | 8.47                      | 48.27            | 68.20           | -19.93       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5550 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

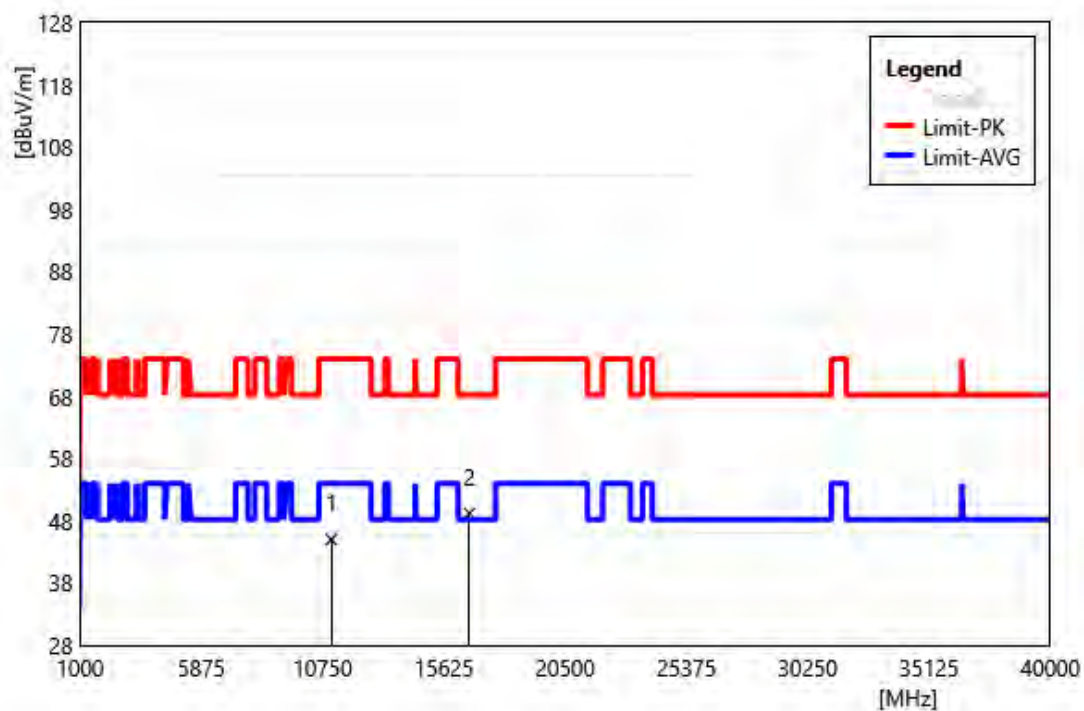


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11100.00         | 38.42           | 6.57                      | 44.98            | 74.00           | -29.02       | PEAK   |
| 2  | 16650.00         | 40.77           | 8.44                      | 49.20            | 68.20           | -19.00       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5550 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

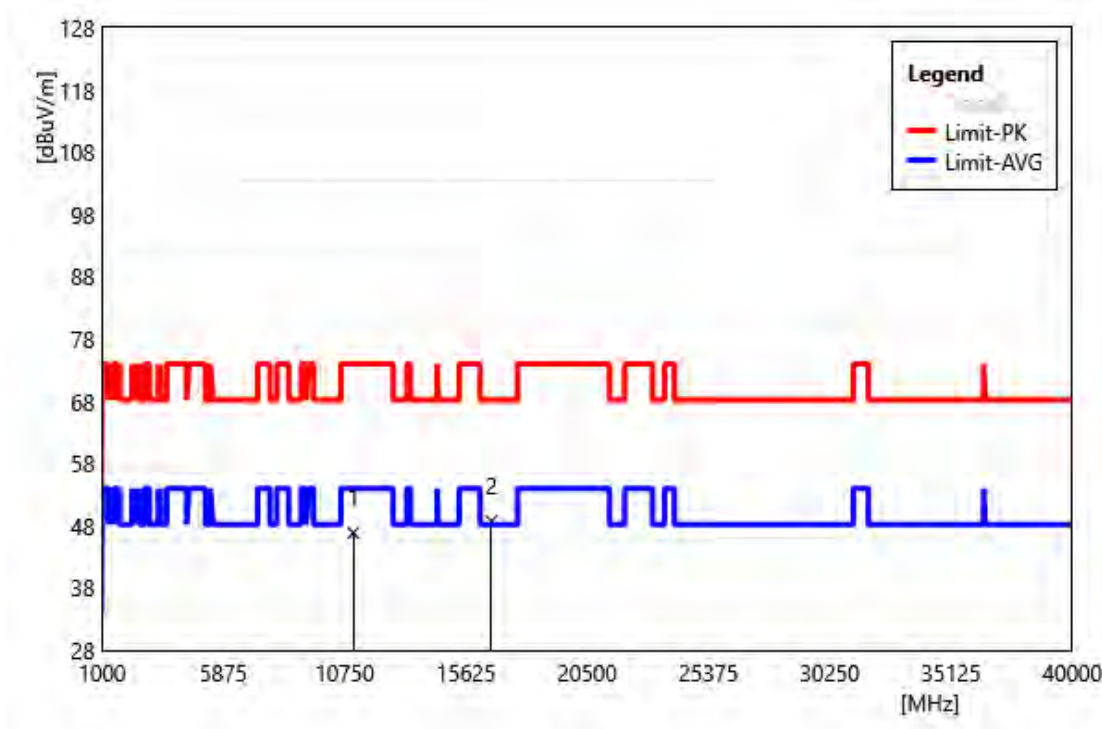


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11100.00         | 40.29           | 6.57                      | 46.86            | 74.00           | -27.14       | PEAK   |
| 2  | 16650.00         | 40.33           | 8.44                      | 48.76            | 68.20           | -19.44       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5670 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

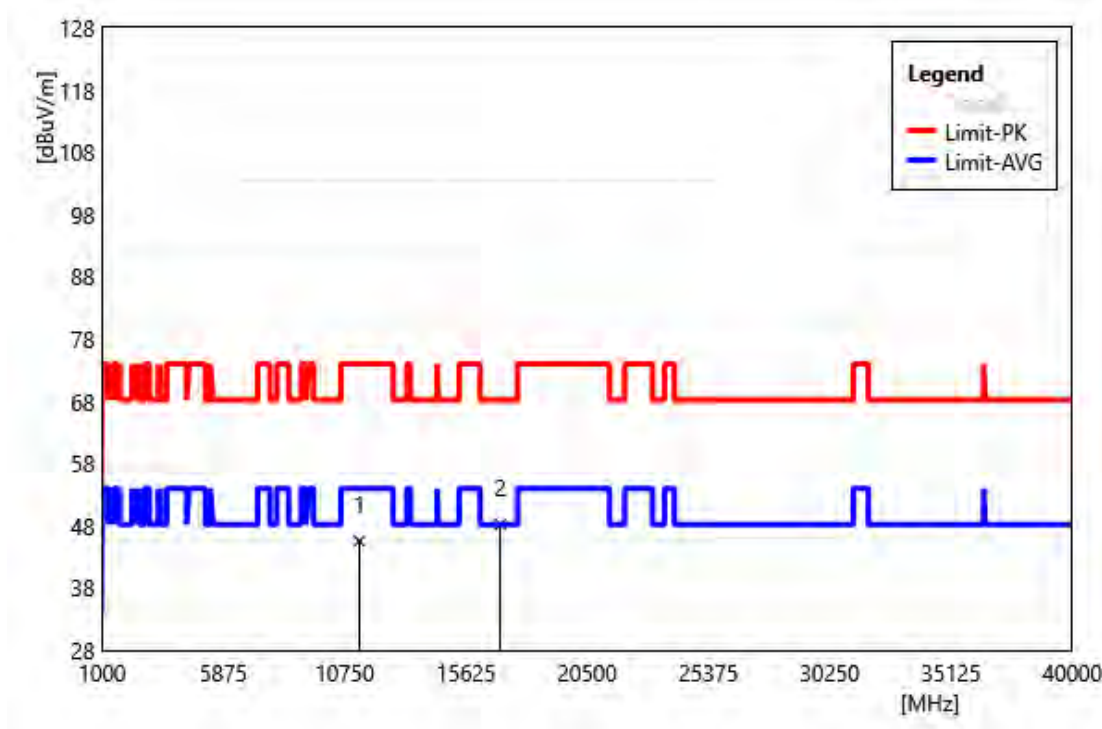


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11340.00         | 38.29           | 7.26                      | 45.55            | 74.00           | -28.45       | PEAK   |
| 2  | 17010.00         | 40.84           | 7.37                      | 48.21            | 68.20           | -19.99       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5670 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

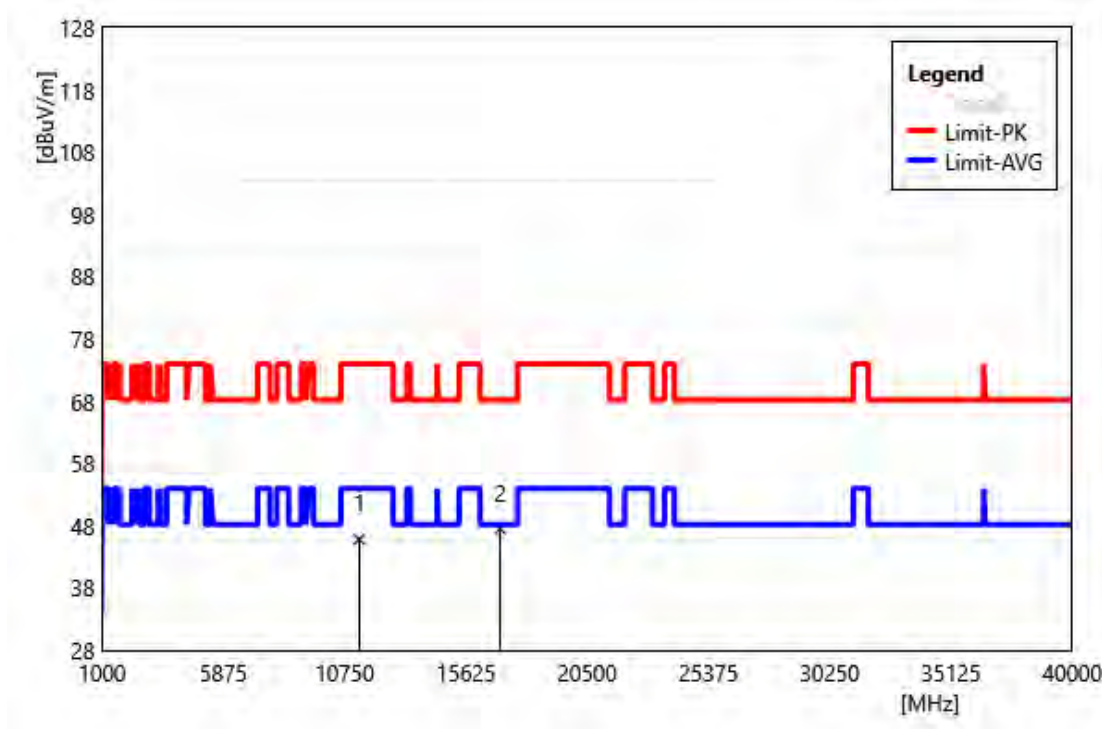


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11340.00         | 38.58           | 7.26                      | 45.83            | 74.00           | -28.17       | PEAK   |
| 2  | 17010.00         | 40.17           | 7.37                      | 47.54            | 68.20           | -20.66       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5755 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

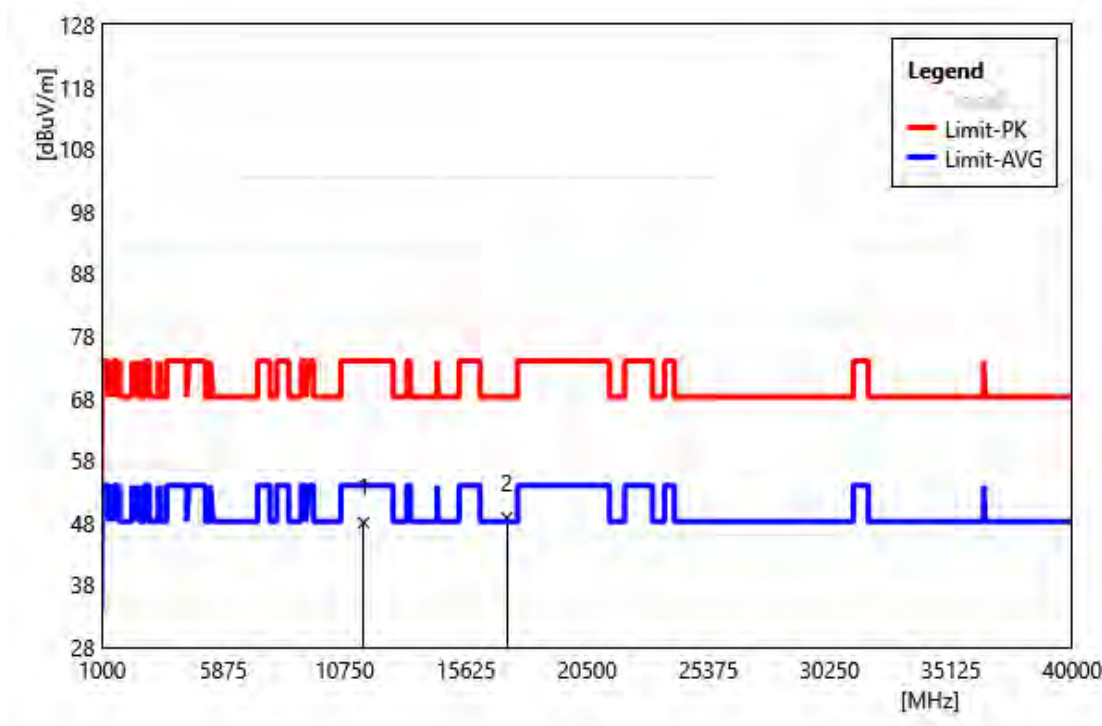


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11510.00         | 40.63           | 7.40                      | 48.02            | 74.00           | -25.98       | PEAK   |
| 2  | 17265.00         | 41.12           | 7.67                      | 48.79            | 68.20           | -19.41       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5755 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

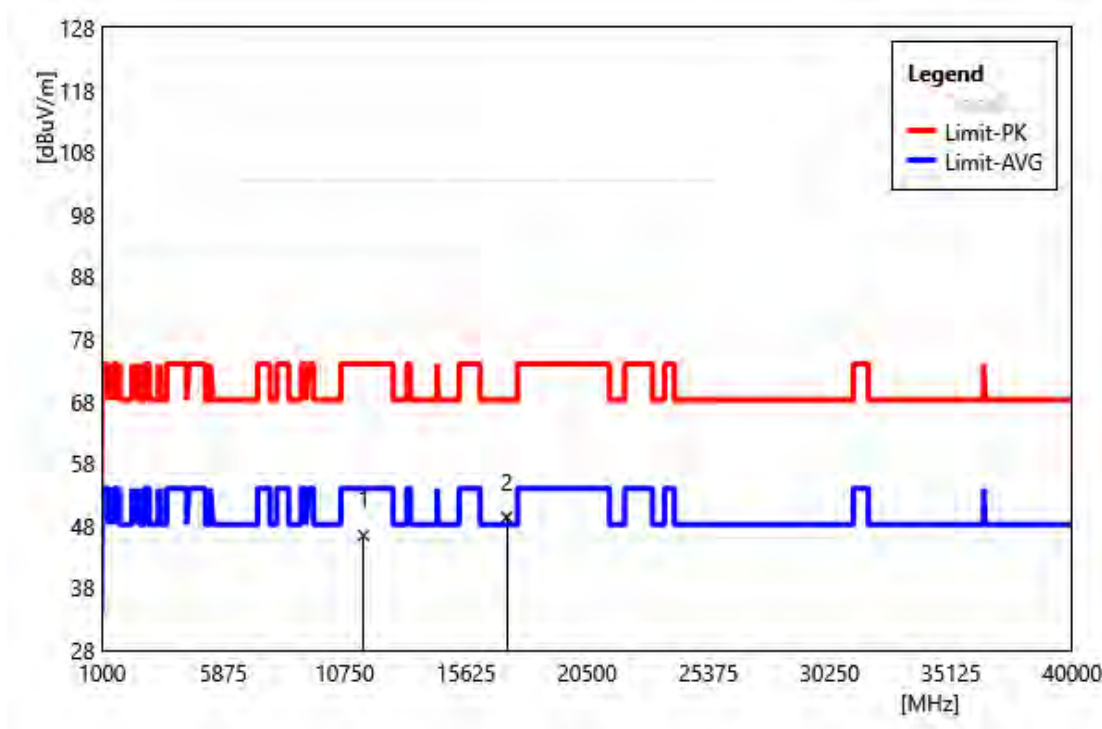


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11510.00         | 39.05           | 7.40                      | 46.44            | 74.00           | -27.56       | PEAK   |
| 2  | 17265.00         | 41.70           | 7.67                      | 49.37            | 68.20           | -18.83       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5795 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

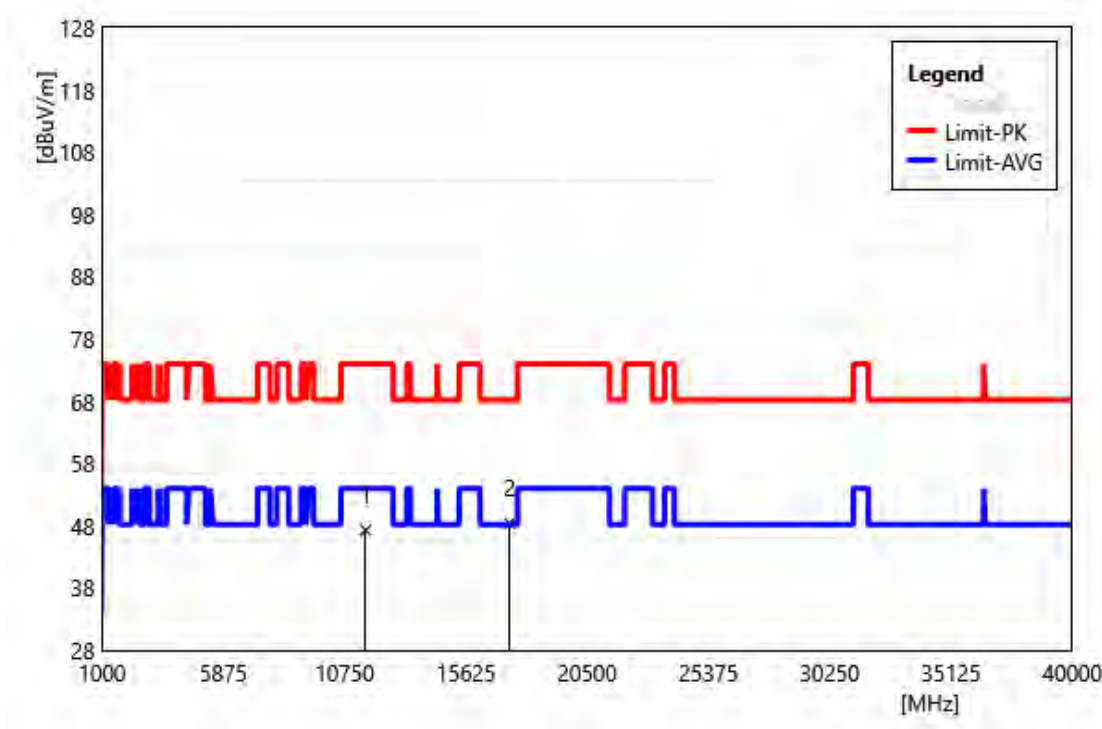


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11590.00         | 39.86           | 7.44                      | 47.30            | 74.00           | -26.70       | PEAK   |
| 2  | 17385.00         | 41.55           | 6.82                      | 48.37            | 68.20           | -19.83       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5795 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

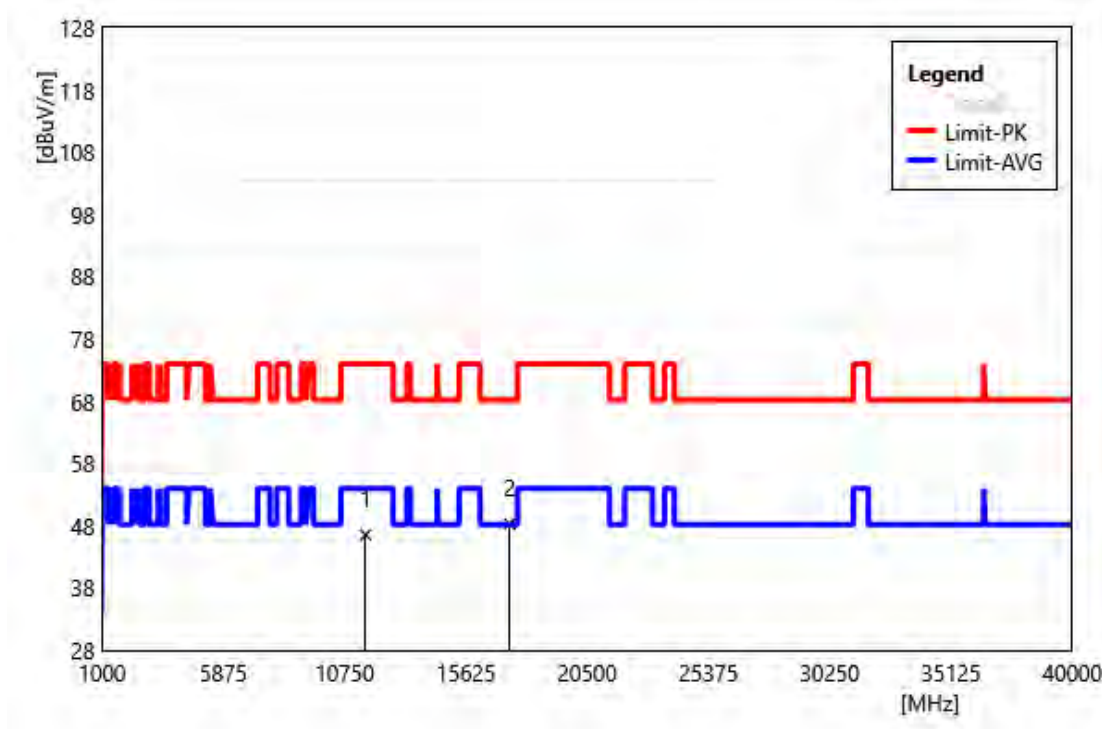


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11590.00         | 39.11           | 7.44                      | 46.55            | 74.00           | -27.45       | PEAK   |
| 2  | 17385.00         | 41.47           | 6.82                      | 48.29            | 68.20           | -19.91       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

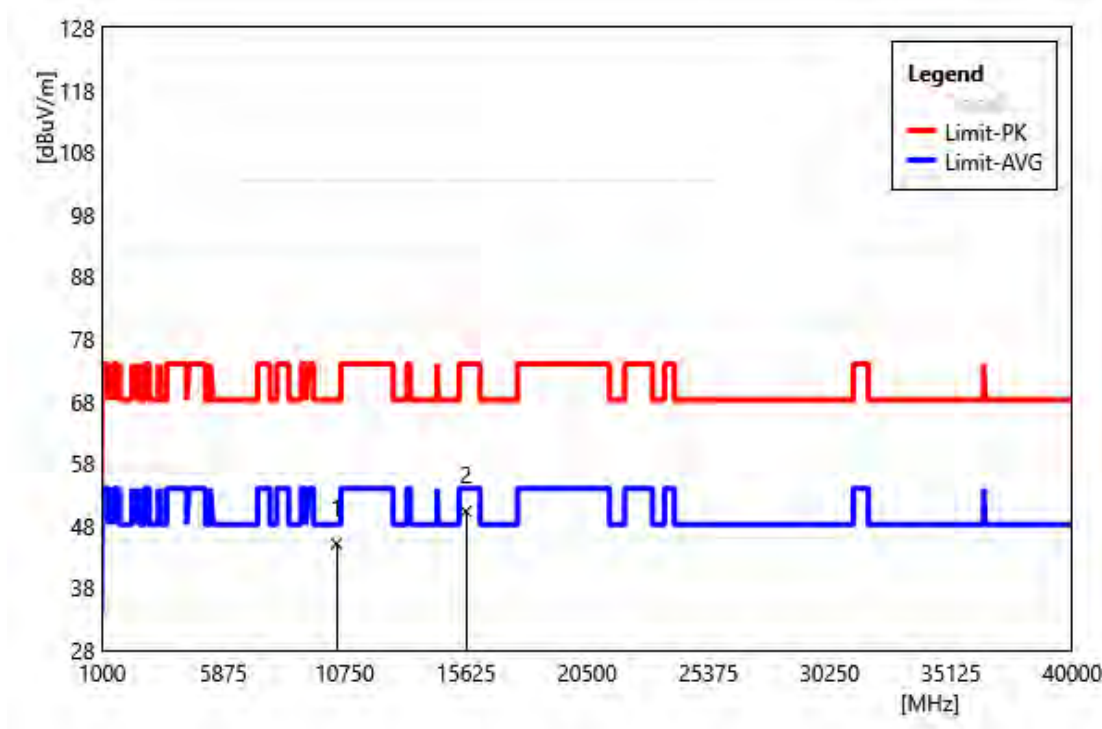


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10420.00         | 38.88           | 6.25                      | 45.13            | 68.20           | -23.07       | PEAK   |
| 2  | 15630.00         | 41.13           | 9.20                      | 50.34            | 74.00           | -23.66       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

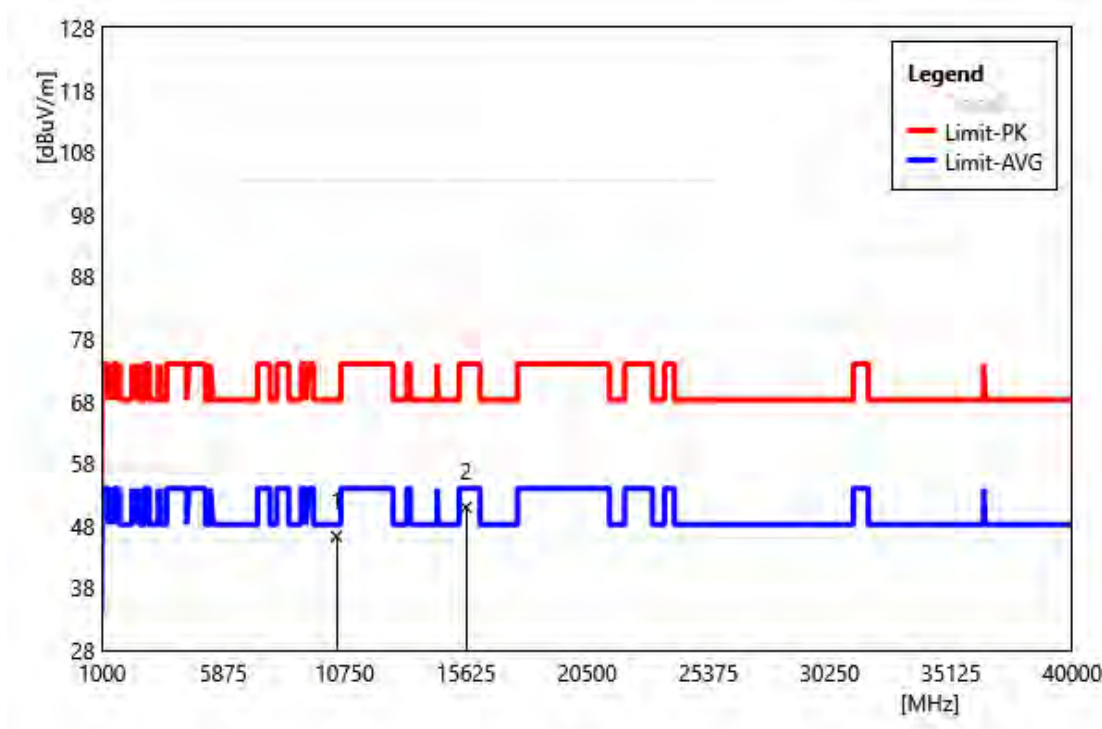


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10420.00         | 40.06           | 6.25                      | 46.31            | 68.20           | -21.89       | PEAK   |
| 2  | 15630.00         | 41.77           | 9.20                      | 50.97            | 74.00           | -23.03       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

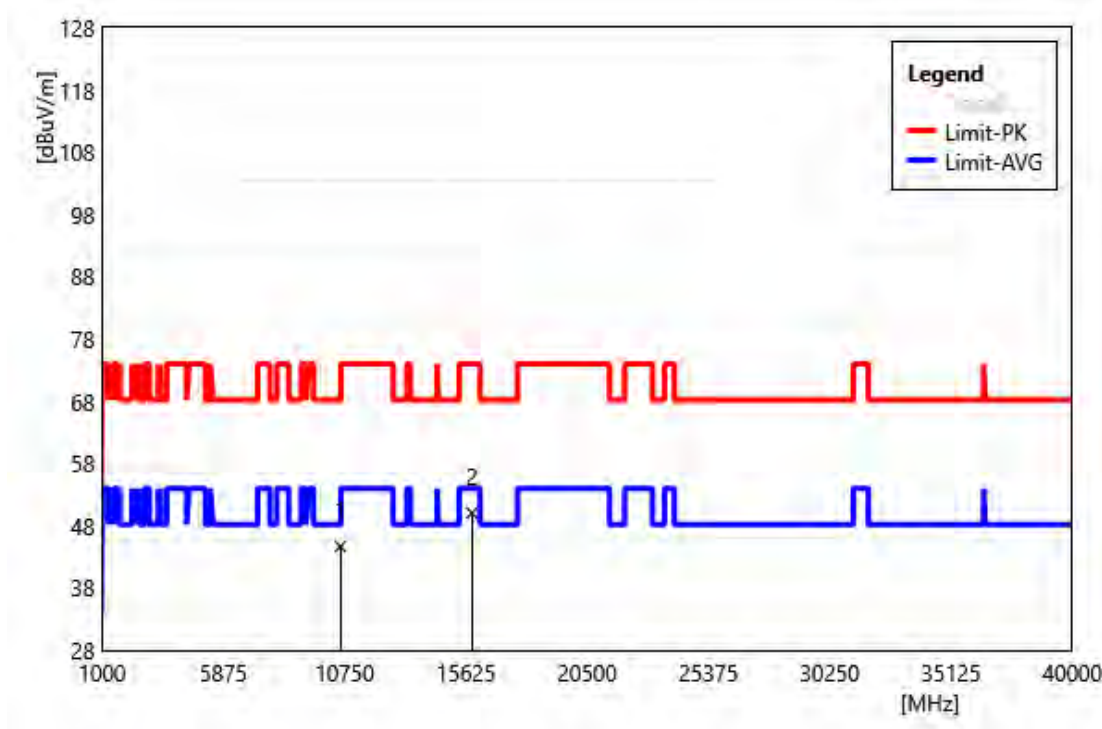


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10580.00         | 38.08           | 6.60                      | 44.67            | 68.20           | -23.53       | PEAK   |
| 2  | 15870.00         | 40.44           | 9.64                      | 50.08            | 74.00           | -23.92       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

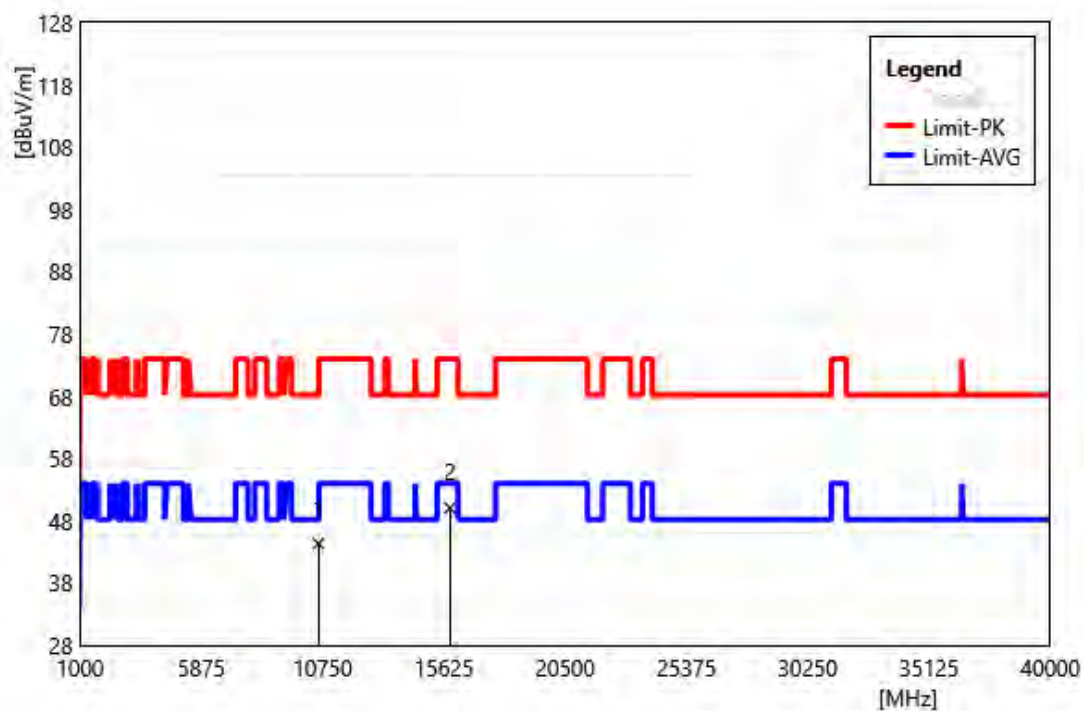


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10580.00         | 37.73           | 6.60                      | 44.33            | 68.20           | -23.87       | PEAK   |
| 2  | 15870.00         | 40.43           | 9.64                      | 50.07            | 74.00           | -23.93       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

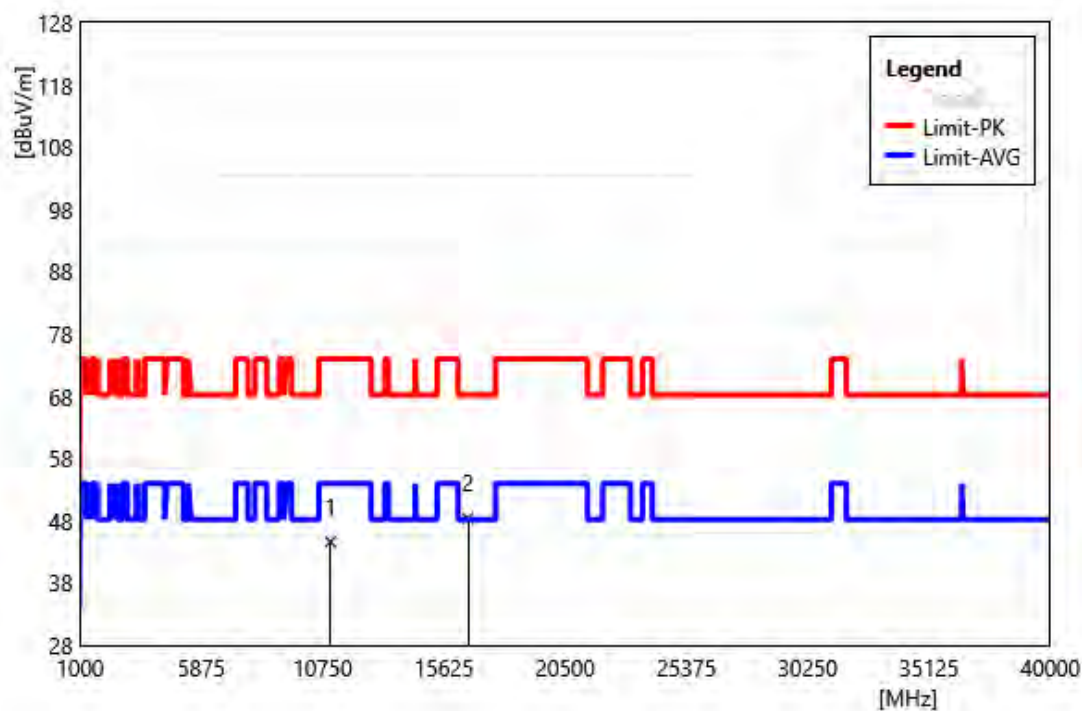


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11060.00         | 38.22           | 6.39                      | 44.61            | 74.00           | -29.39       | PEAK   |
| 2  | 16590.00         | 40.14           | 8.25                      | 48.39            | 68.20           | -19.81       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

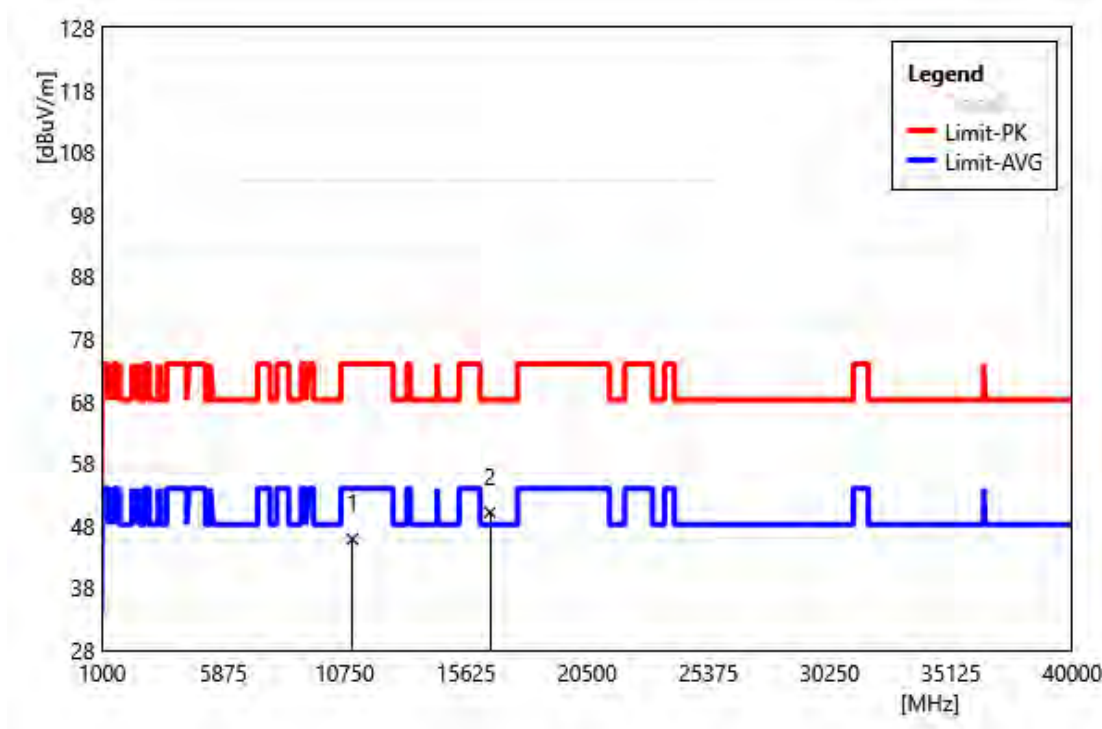


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11060.00         | 39.49           | 6.39                      | 45.88            | 74.00           | -28.12       | PEAK   |
| 2  | 16590.00         | 41.92           | 8.25                      | 50.17            | 68.20           | -18.03       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

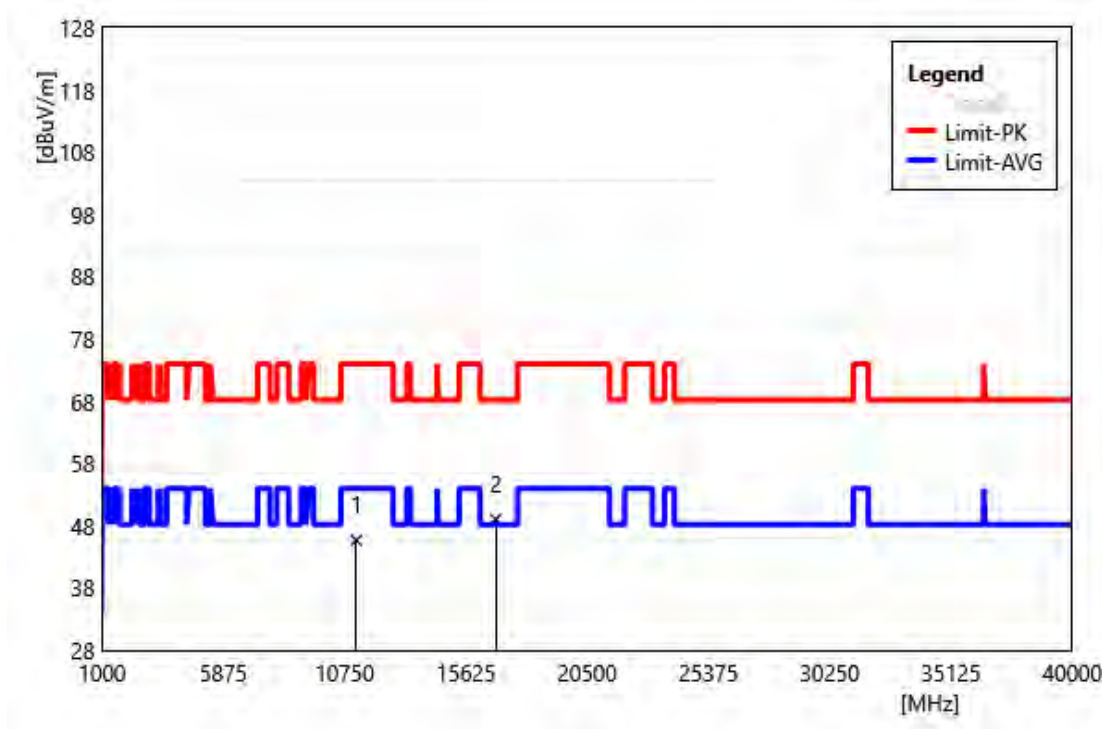


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11220.00         | 38.53           | 7.14                      | 45.67            | 74.00           | -28.33       | PEAK   |
| 2  | 16830.00         | 41.18           | 7.86                      | 49.04            | 68.20           | -19.16       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

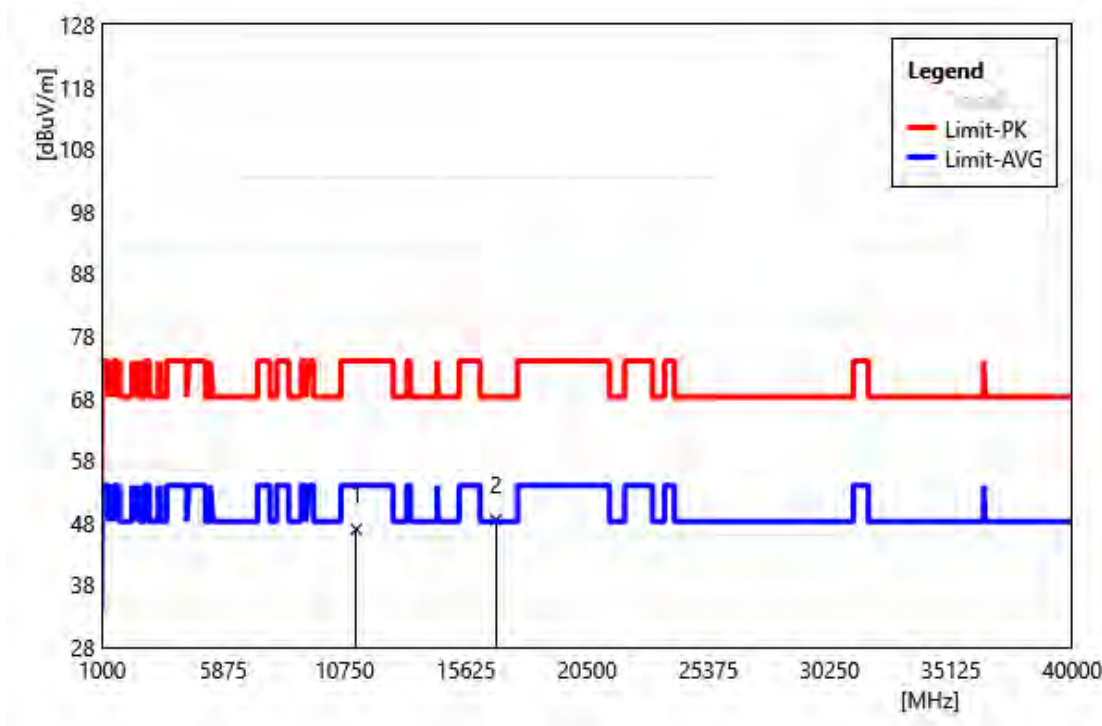


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11220.00         | 39.81           | 7.14                      | 46.95            | 74.00           | -27.05       | PEAK   |
| 2  | 16830.00         | 40.61           | 7.86                      | 48.47            | 68.20           | -19.73       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

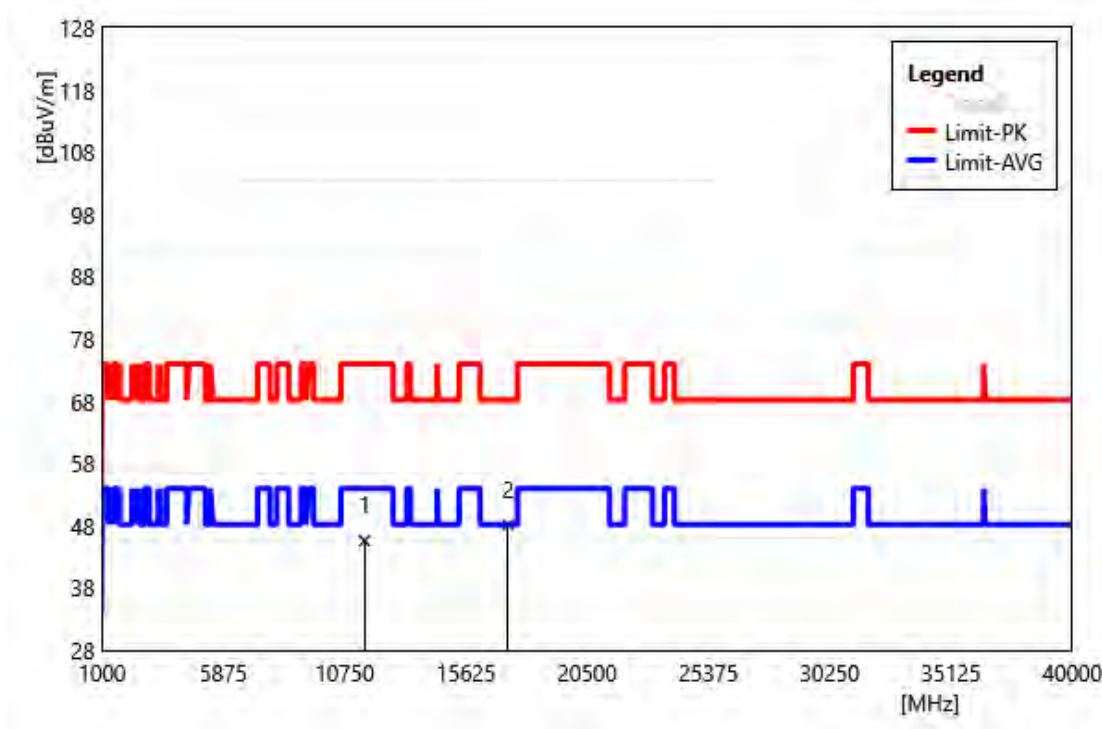


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11550.00         | 37.97           | 7.64                      | 45.61            | 74.00           | -28.39       | PEAK   |
| 2  | 17325.00         | 41.05           | 7.09                      | 48.14            | 68.20           | -20.06       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

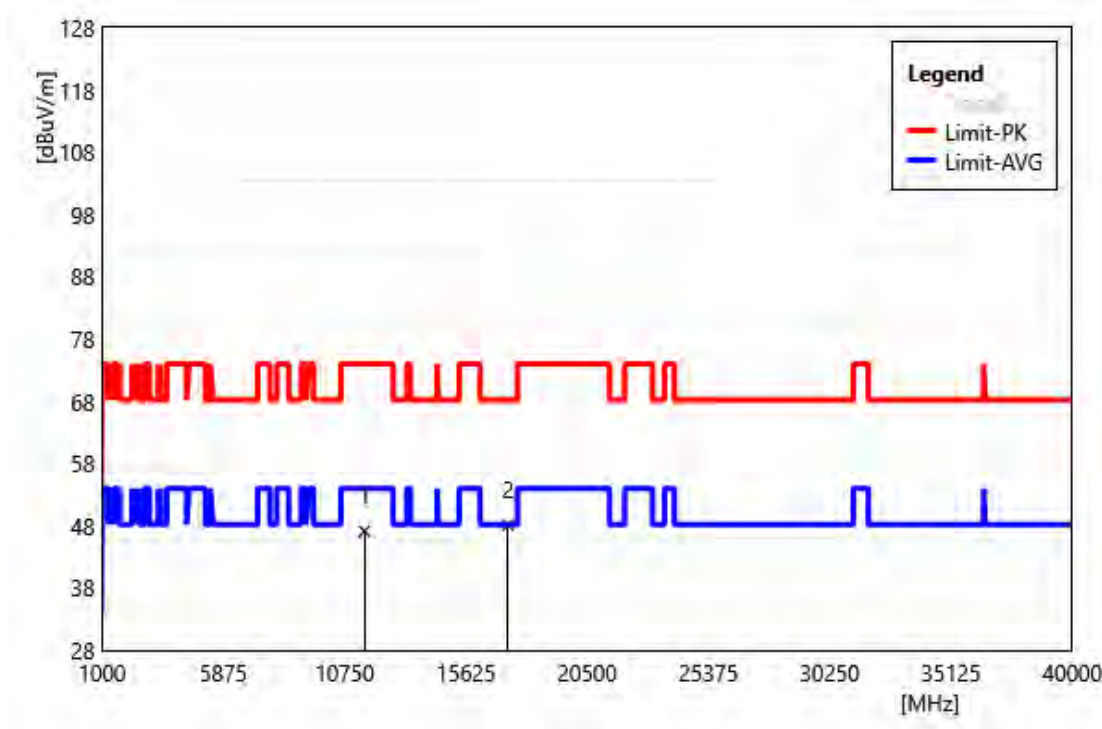


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11550.00         | 39.49           | 7.64                      | 47.12            | 74.00           | -26.88       | PEAK   |
| 2  | 17325.00         | 41.02           | 7.09                      | 48.11            | 68.20           | -20.09       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

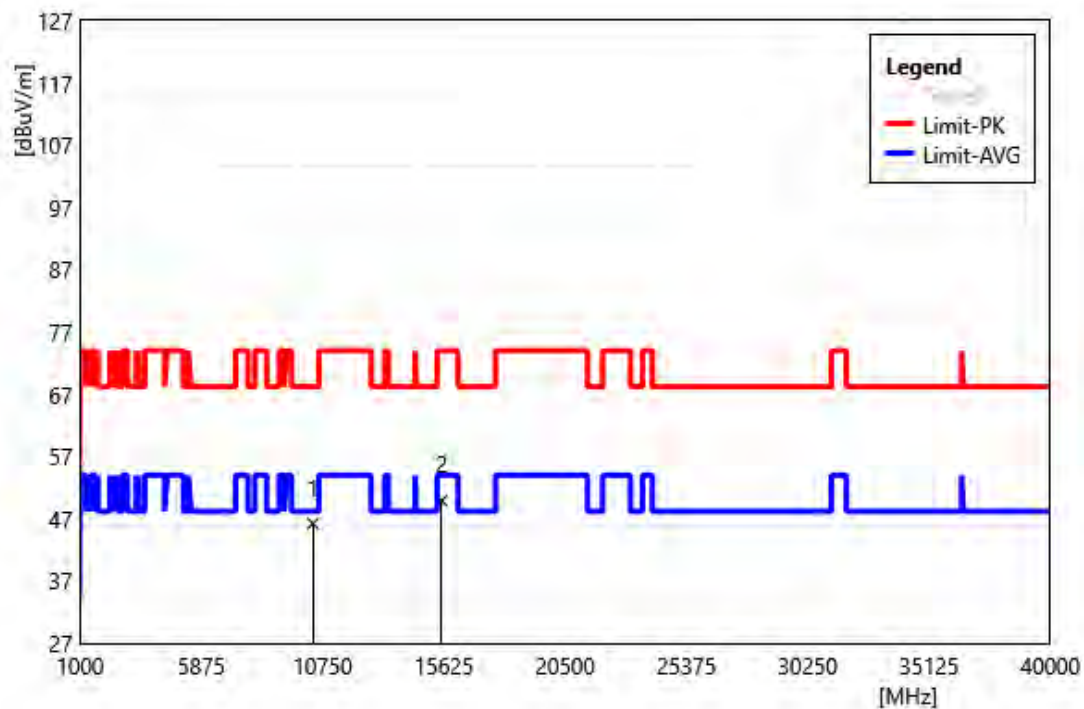


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 39.77           | 6.46                      | 46.23            | 68.20           | -21.97       | PEAK   |
| 2  | 15540.00         | 40.76           | 9.14                      | 49.89            | 74.00           | -24.11       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

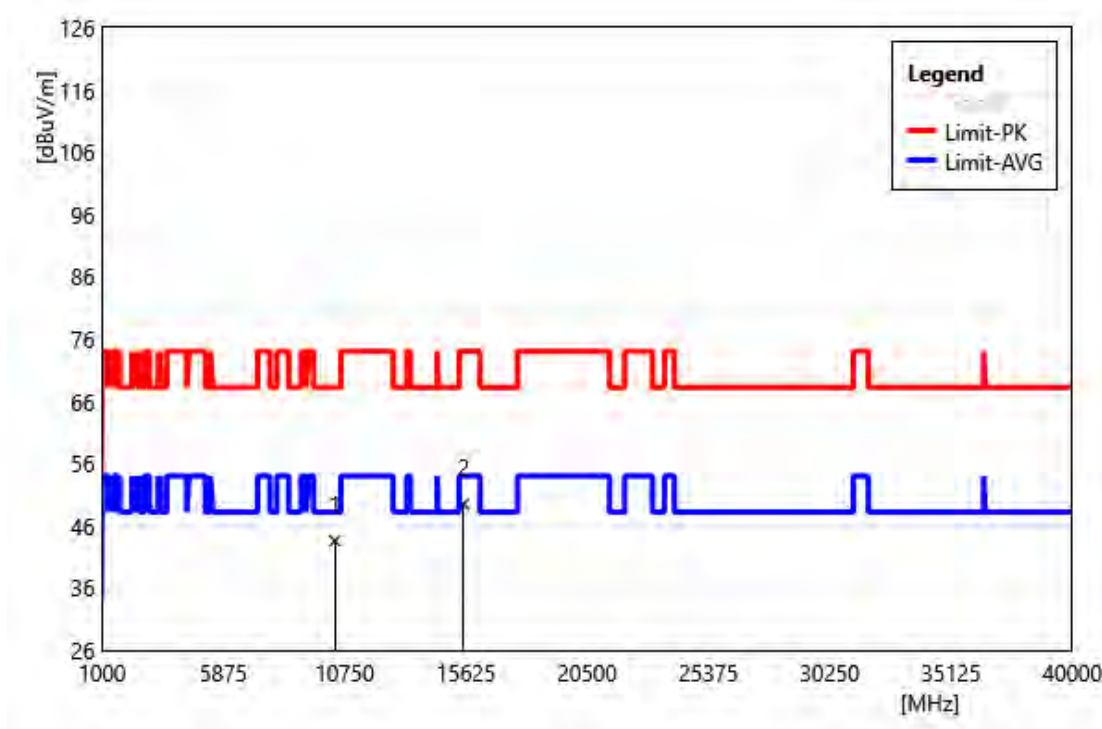


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10360.00         | 37.13           | 6.46                      | 43.59            | 68.20           | -24.61       | PEAK   |
| 2  | 15540.00         | 40.35           | 9.14                      | 49.48            | 74.00           | -24.52       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5200 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

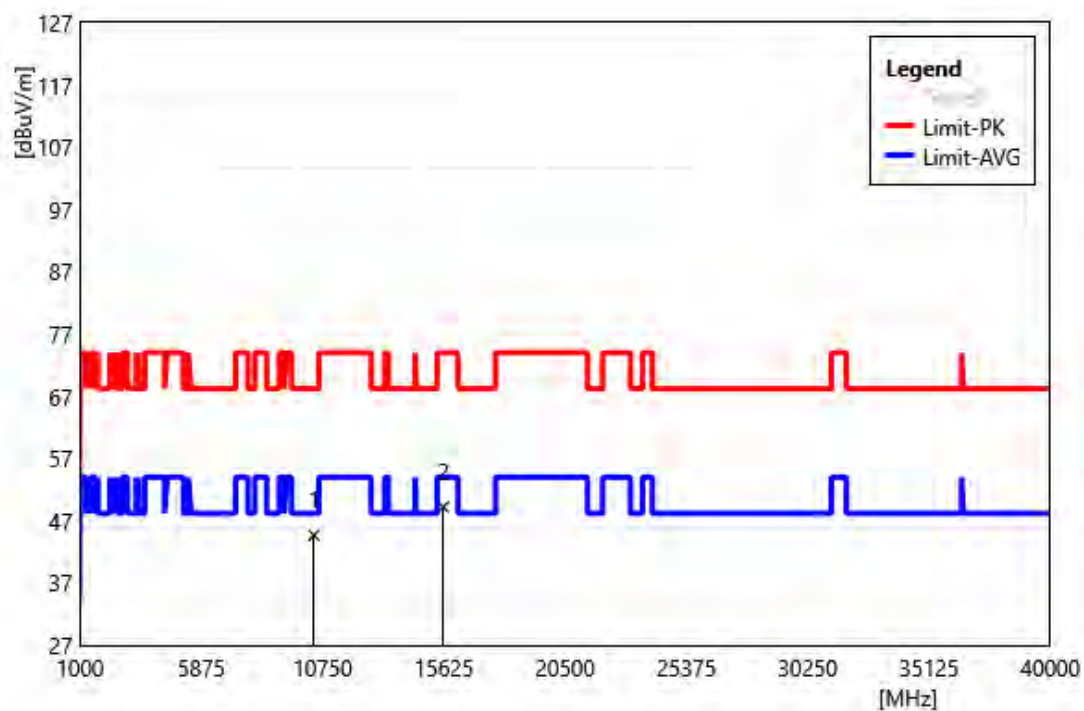


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 38.36           | 6.31                      | 44.67            | 68.20           | -23.53       | PEAK   |
| 2  | 15600.00         | 40.27           | 8.95                      | 49.21            | 74.00           | -24.79       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5200 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

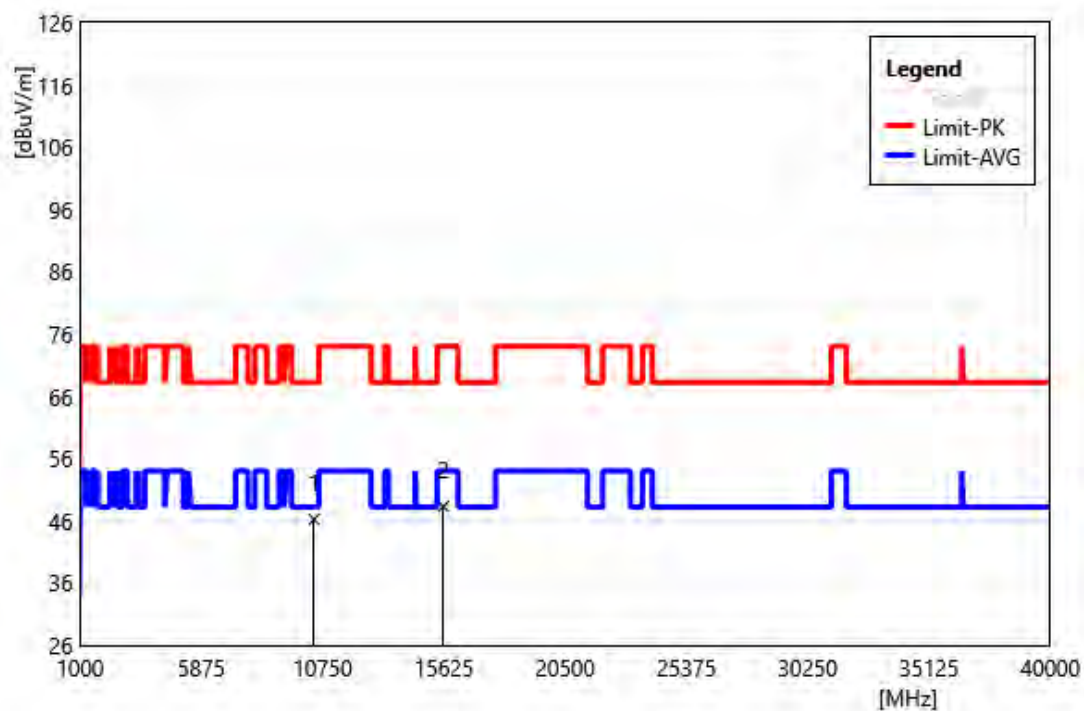


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10400.00         | 39.91           | 6.31                      | 46.23            | 68.20           | -21.97       | PEAK   |
| 2  | 15600.00         | 39.35           | 8.95                      | 48.30            | 74.00           | -25.70       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5240 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

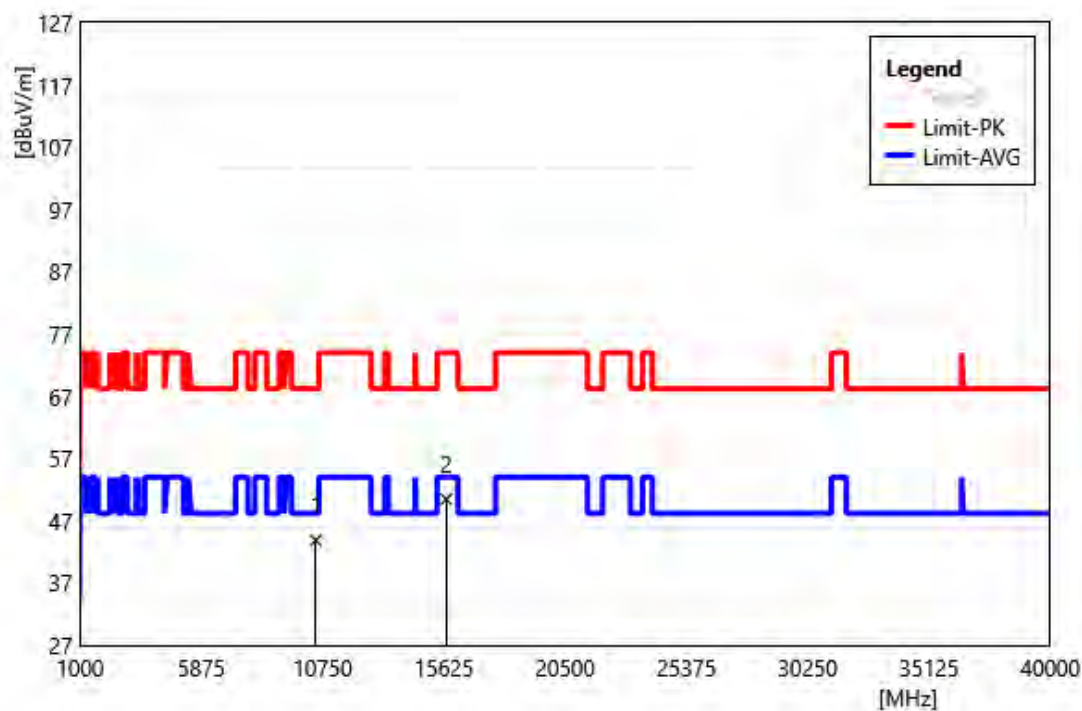


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 37.45           | 6.42                      | 43.87            | 68.20           | -24.33       | PEAK   |
| 2  | 15720.00         | 41.19           | 9.28                      | 50.47            | 74.00           | -23.53       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5240 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

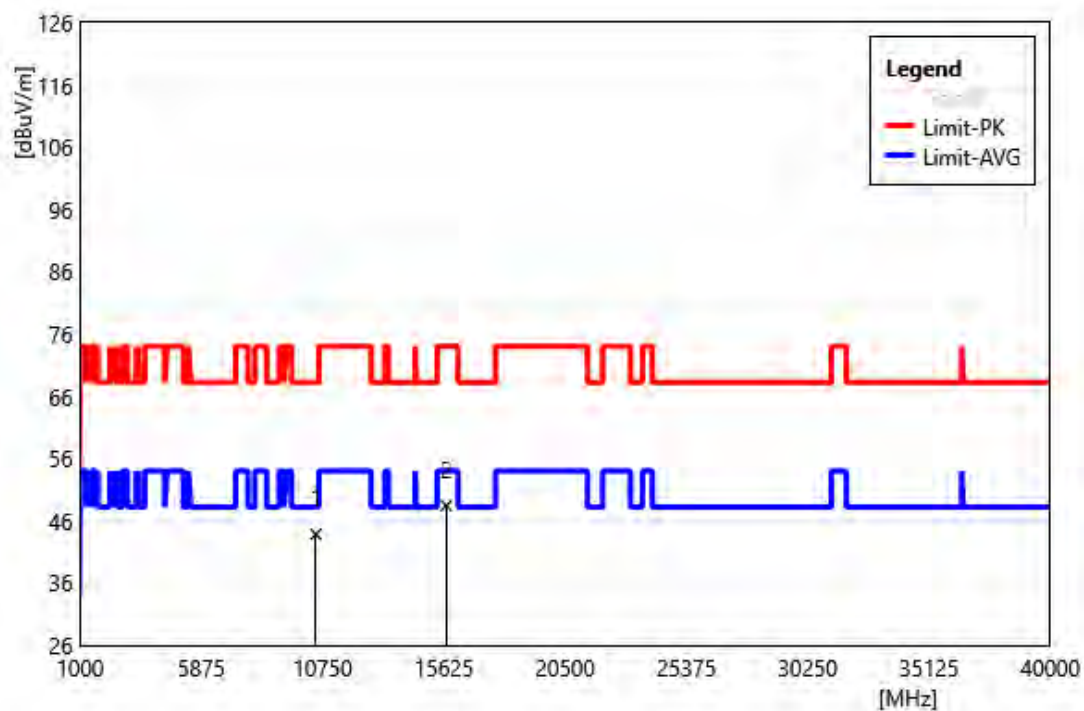


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10480.00         | 37.41           | 6.42                      | 43.84            | 68.20           | -24.36       | PEAK   |
| 2  | 15720.00         | 39.15           | 9.28                      | 48.43            | 74.00           | -25.57       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5260 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

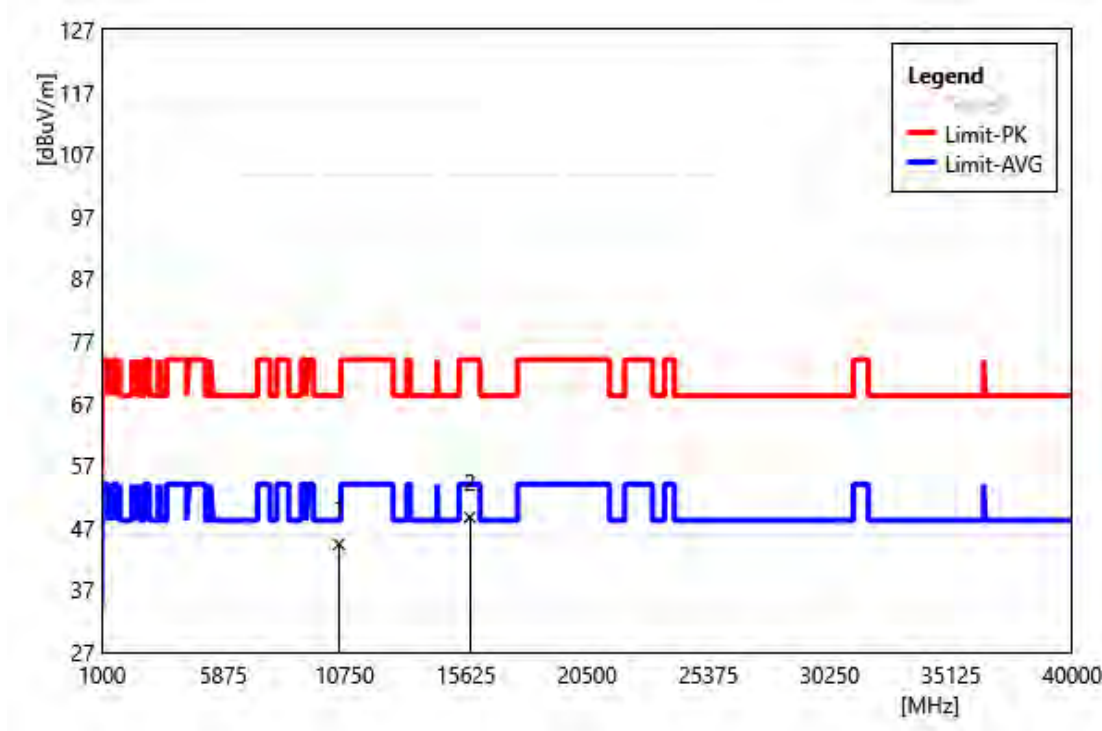


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 38.12           | 6.23                      | 44.34            | 68.20           | -23.86       | PEAK   |
| 2  | 15780.00         | 39.23           | 9.46                      | 48.68            | 74.00           | -25.32       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5260 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

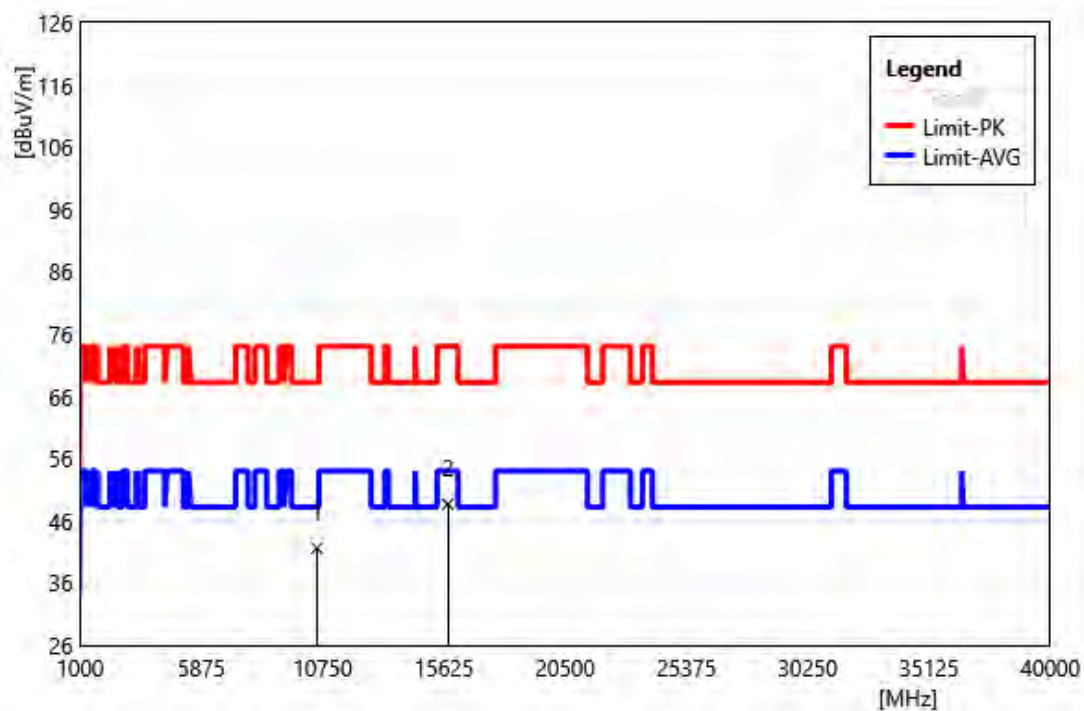


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10520.00         | 35.39           | 6.23                      | 41.62            | 68.20           | -26.58       | PEAK   |
| 2  | 15780.00         | 39.21           | 9.46                      | 48.66            | 74.00           | -25.34       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5280 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

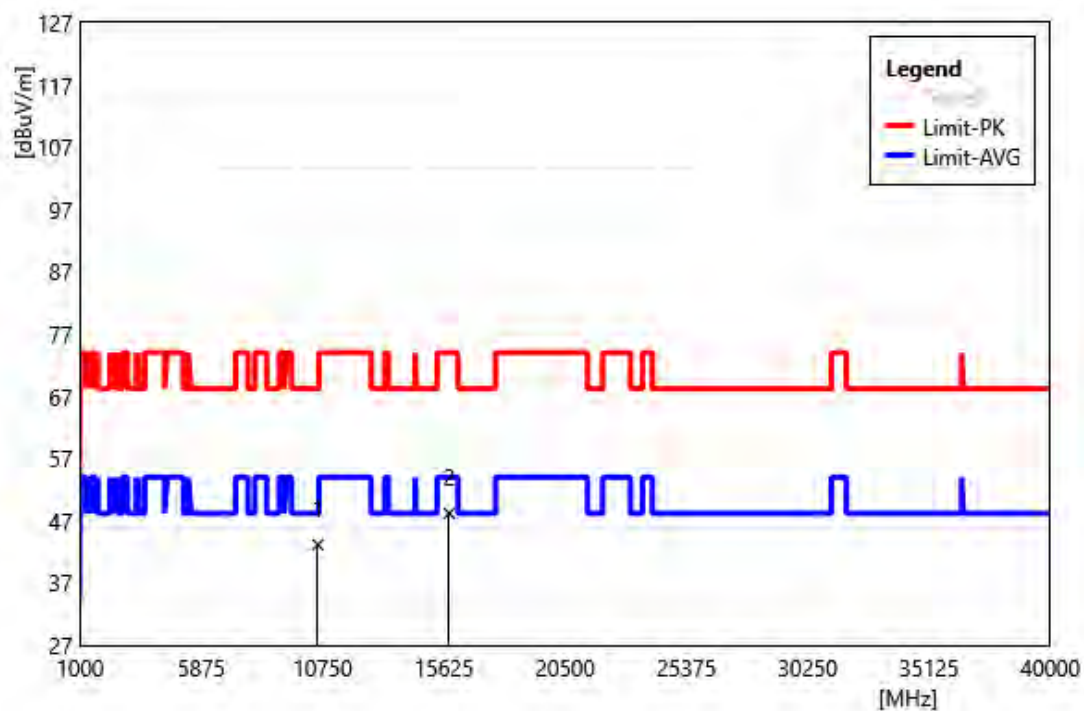


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 36.84           | 6.33                      | 43.18            | 68.20           | -25.02       | PEAK   |
| 2  | 15840.00         | 38.75           | 9.44                      | 48.19            | 74.00           | -25.81       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5280 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

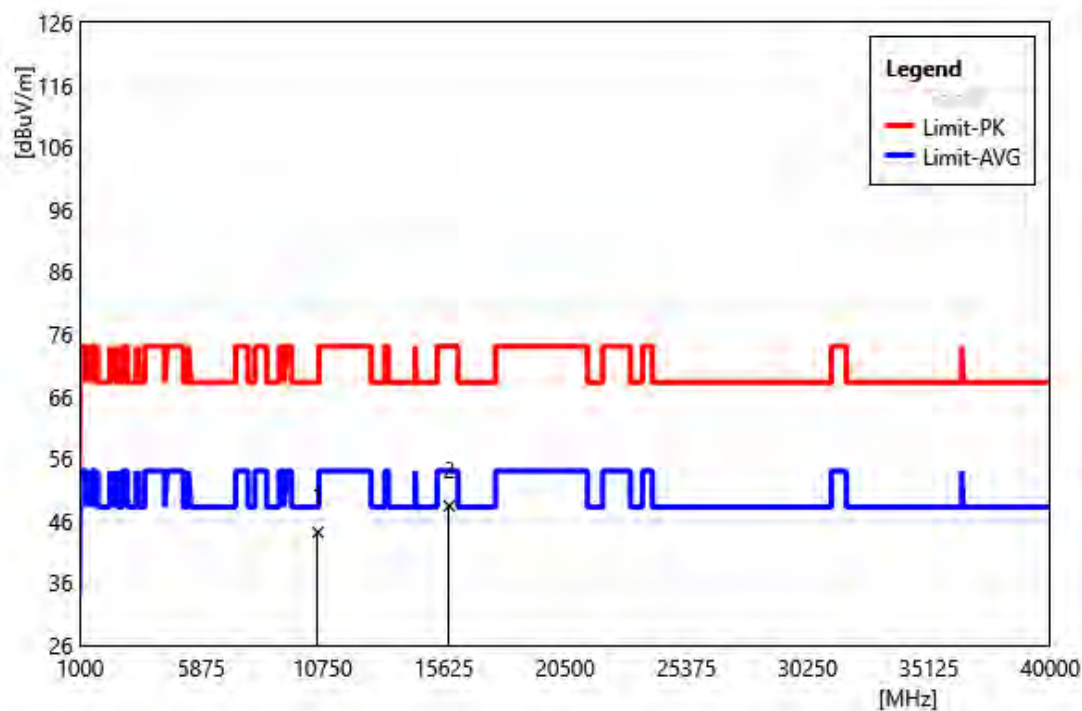


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10560.00         | 37.80           | 6.33                      | 44.14            | 68.20           | -24.06       | PEAK   |
| 2  | 15840.00         | 38.94           | 9.44                      | 48.38            | 74.00           | -25.62       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

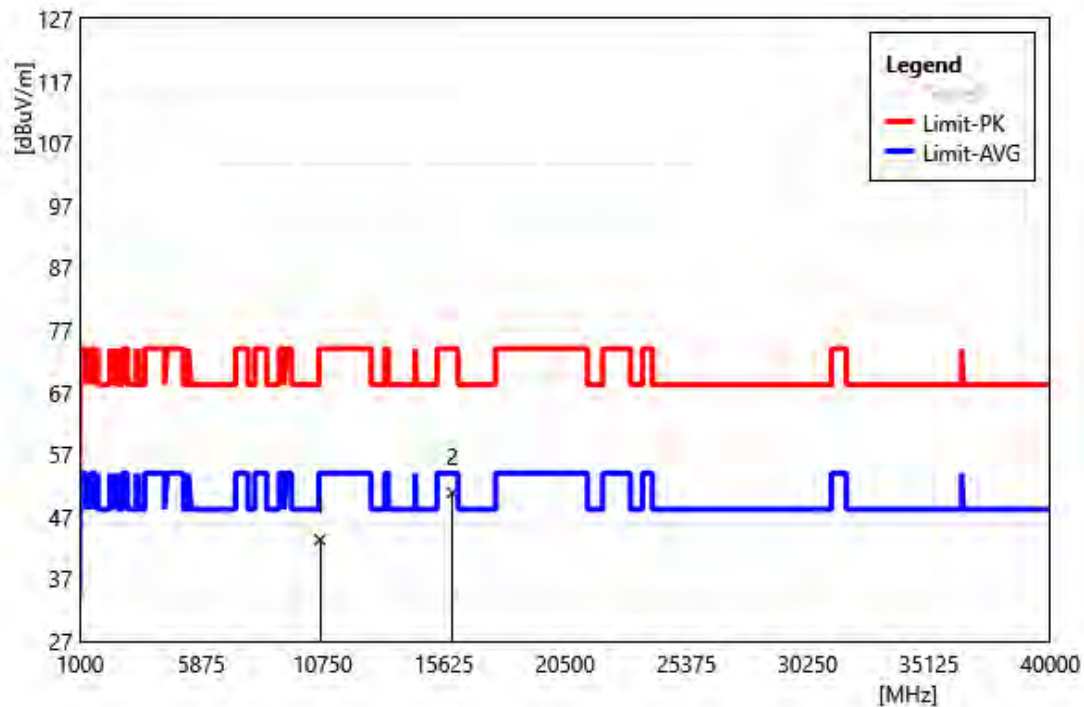


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 37.16           | 6.13                      | 43.30            | 74.00           | -30.70       | PEAK   |
| 2  | 15960.00         | 41.12           | 9.73                      | 50.85            | 74.00           | -23.15       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

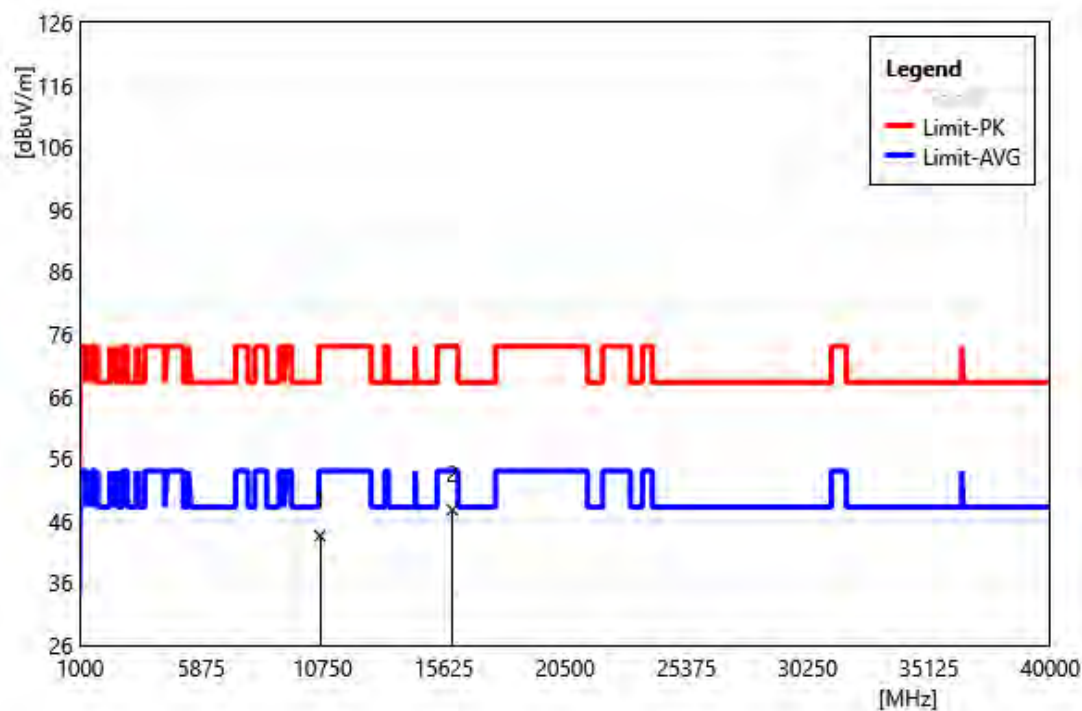


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10640.00         | 37.43           | 6.13                      | 43.57            | 74.00           | -30.43       | PEAK   |
| 2  | 15960.00         | 37.99           | 9.73                      | 47.73            | 74.00           | -26.27       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

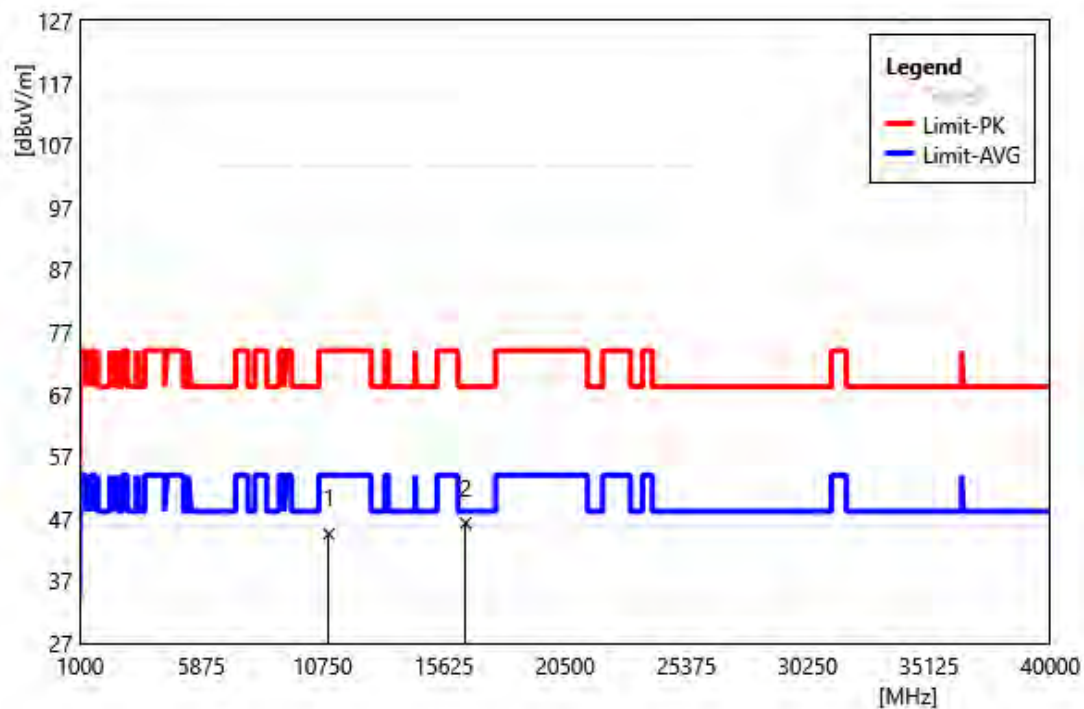


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 38.50           | 6.05                      | 44.55            | 74.00           | -29.45       | PEAK   |
| 2  | 16500.00         | 37.93           | 8.37                      | 46.30            | 68.20           | -21.90       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

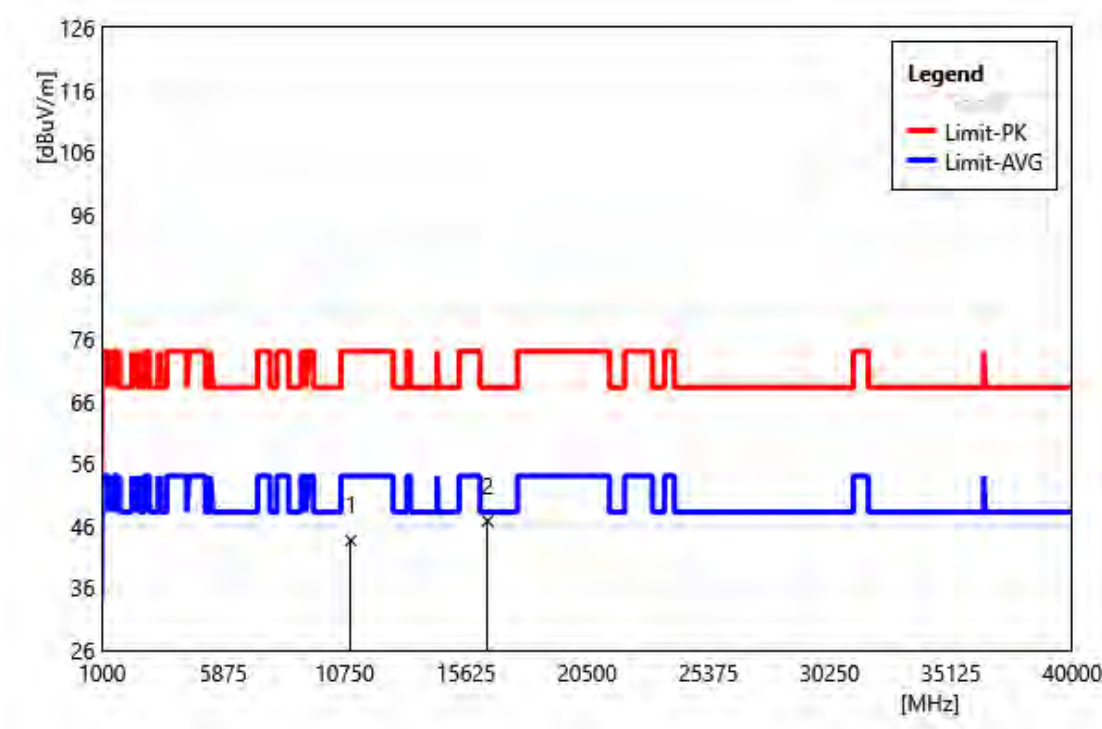


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11000.00         | 37.58           | 6.05                      | 43.63            | 74.00           | -30.37       | PEAK   |
| 2  | 16500.00         | 38.39           | 8.37                      | 46.76            | 68.20           | -21.44       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5560 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

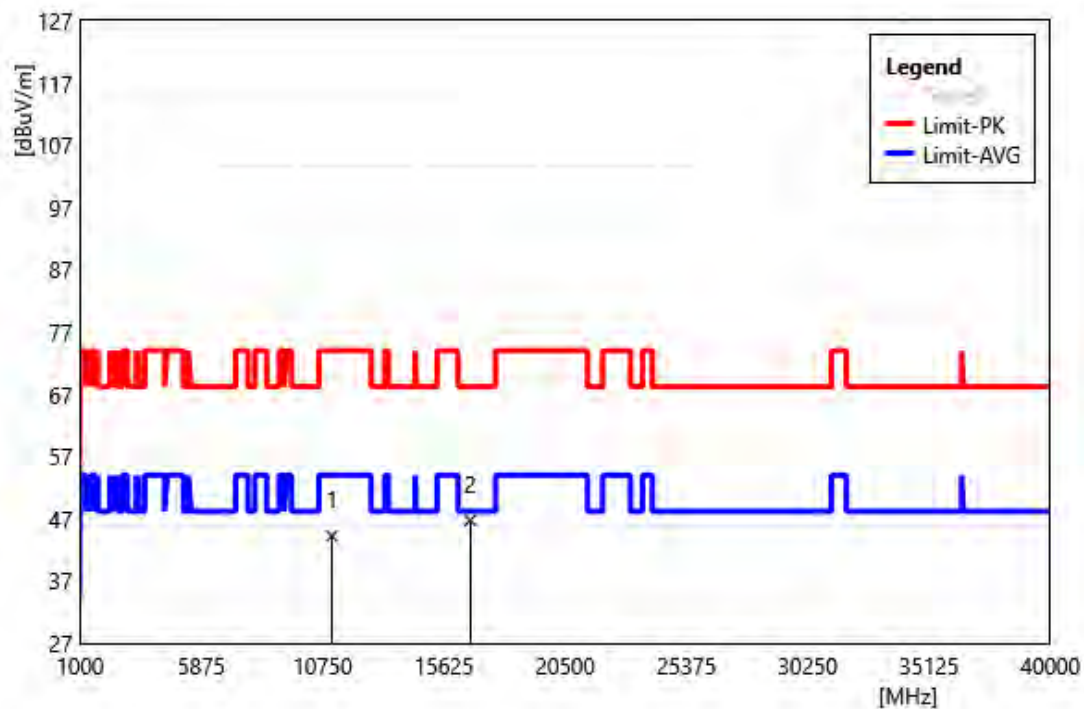


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 37.56           | 6.69                      | 44.25            | 74.00           | -29.75       | PEAK   |
| 2  | 16680.00         | 38.52           | 8.22                      | 46.74            | 68.20           | -21.46       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5560 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

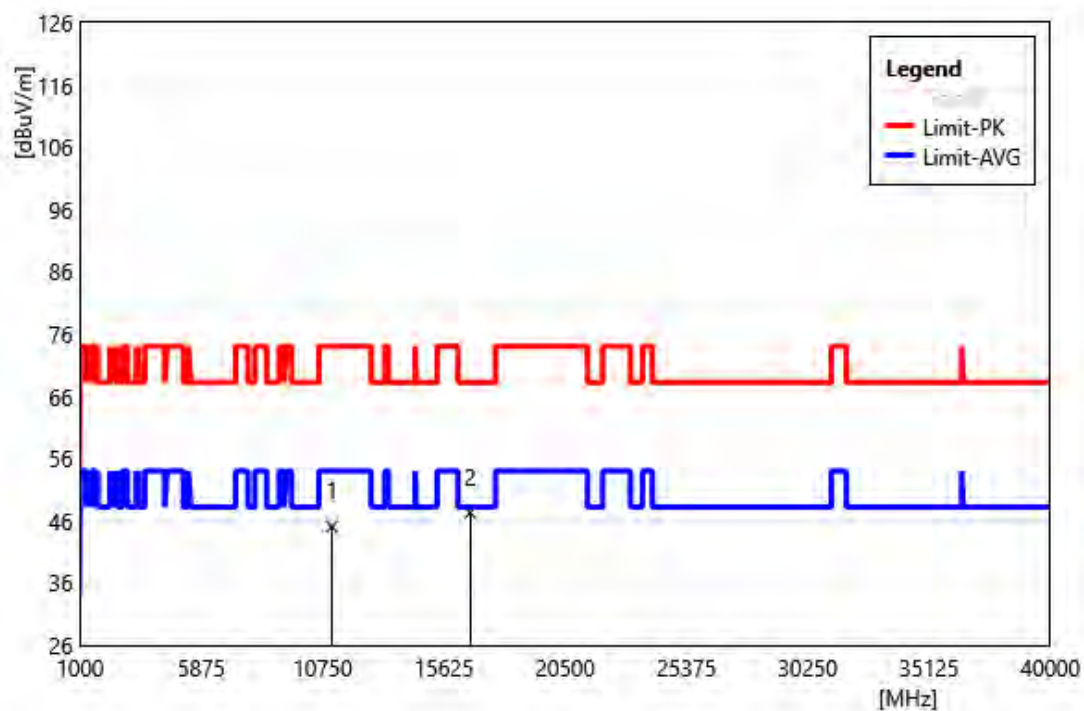


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11120.00         | 38.38           | 6.69                      | 45.07            | 74.00           | -28.93       | PEAK   |
| 2  | 16680.00         | 39.06           | 8.22                      | 47.28            | 68.20           | -20.92       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5700 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

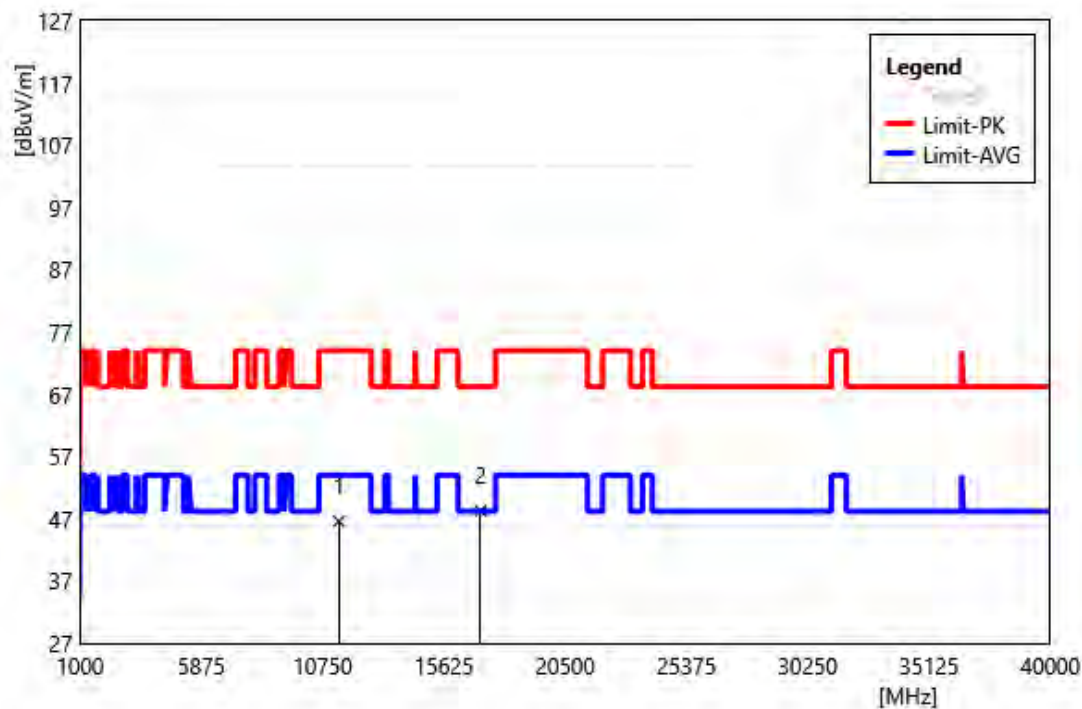


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 39.47           | 7.13                      | 46.60            | 74.00           | -27.40       | PEAK   |
| 2  | 17100.00         | 40.43           | 7.85                      | 48.27            | 68.20           | -19.93       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5700 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

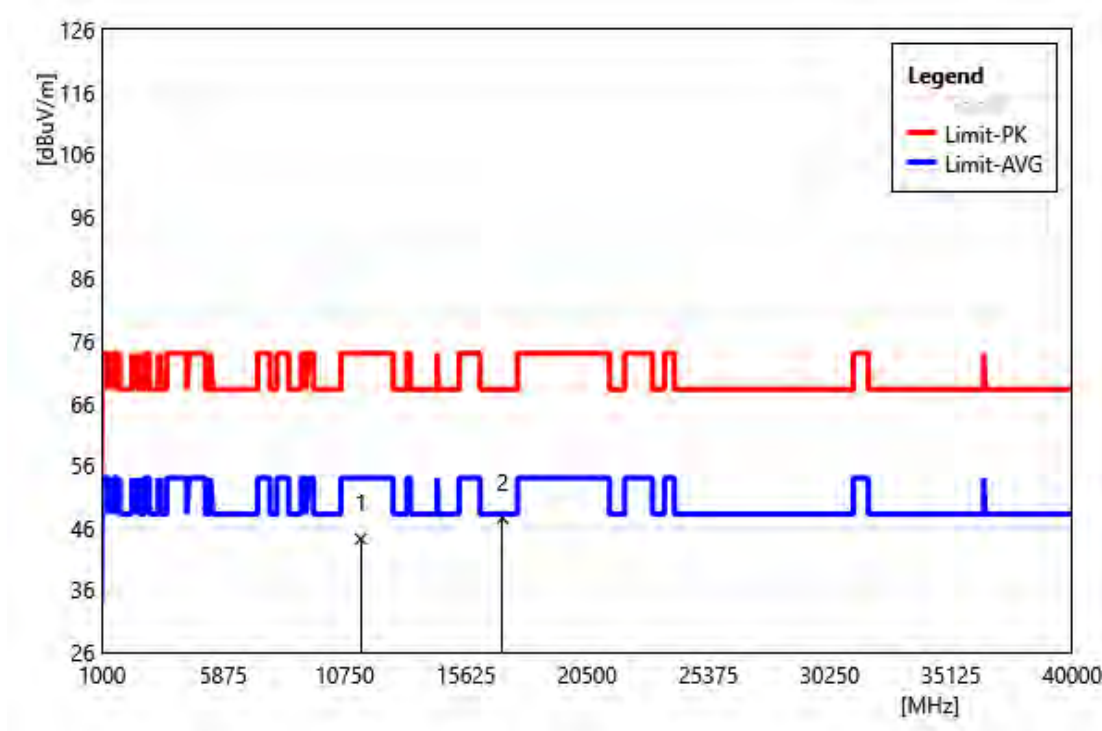


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11400.00         | 37.04           | 7.13                      | 44.18            | 74.00           | -29.82       | PEAK   |
| 2  | 17100.00         | 39.73           | 7.85                      | 47.58            | 68.20           | -20.62       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5745 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

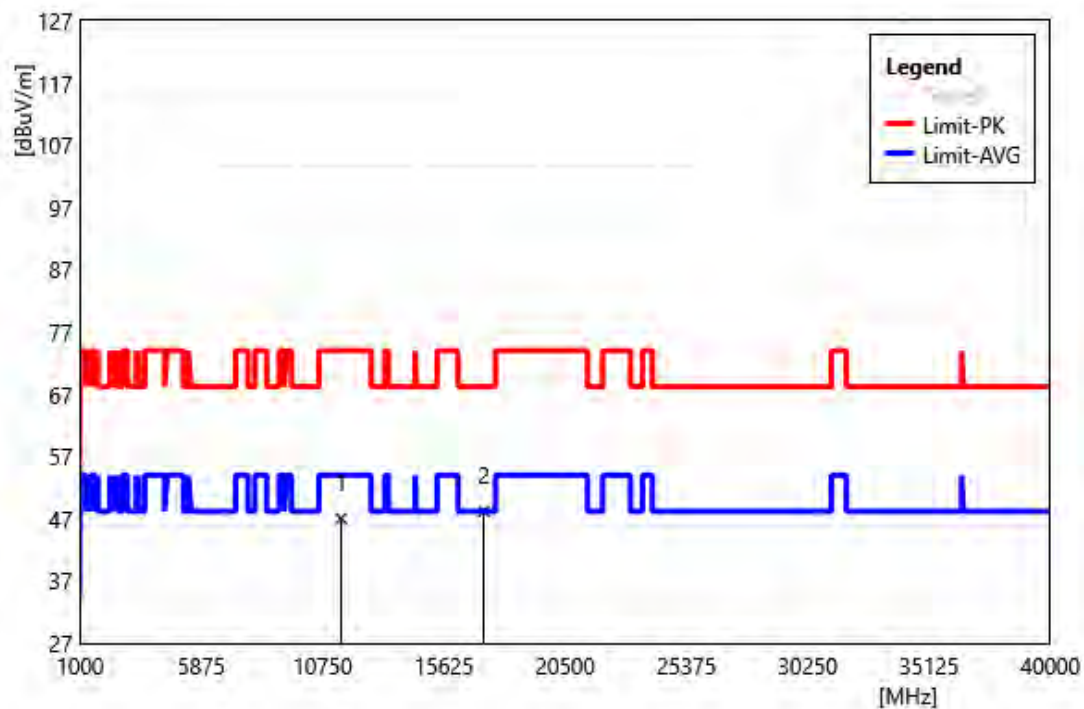


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 39.69           | 7.35                      | 47.04            | 74.00           | -26.96       | PEAK   |
| 2  | 17235.00         | 40.63           | 7.59                      | 48.22            | 68.20           | -19.98       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5745 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

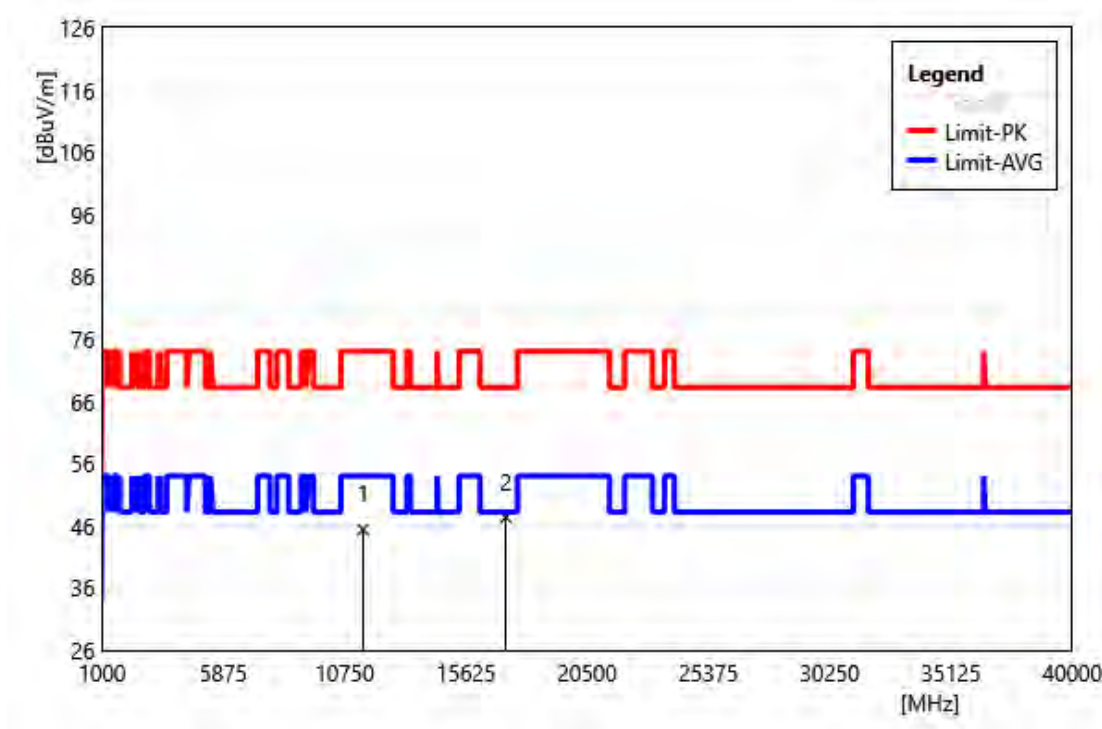


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11490.00         | 38.06           | 7.35                      | 45.41            | 74.00           | -28.59       | PEAK   |
| 2  | 17235.00         | 39.77           | 7.59                      | 47.36            | 68.20           | -20.84       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5785 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

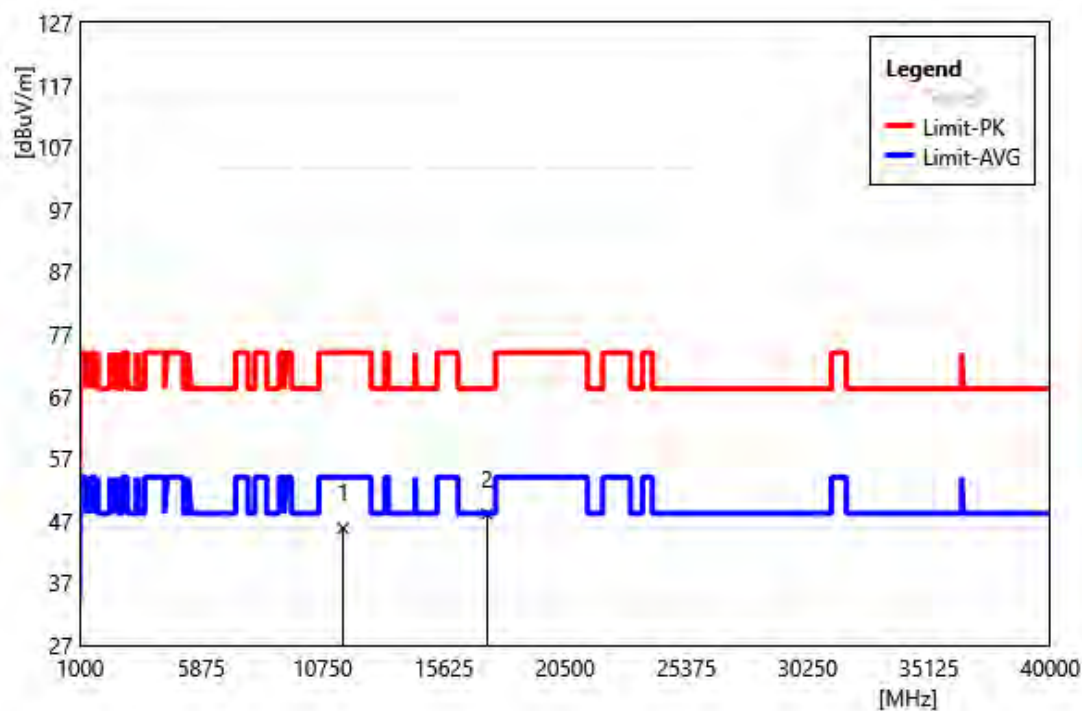


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 38.22           | 7.59                      | 45.81            | 74.00           | -28.19       | PEAK   |
| 2  | 17355.00         | 41.13           | 6.95                      | 48.08            | 68.20           | -20.12       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5785 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

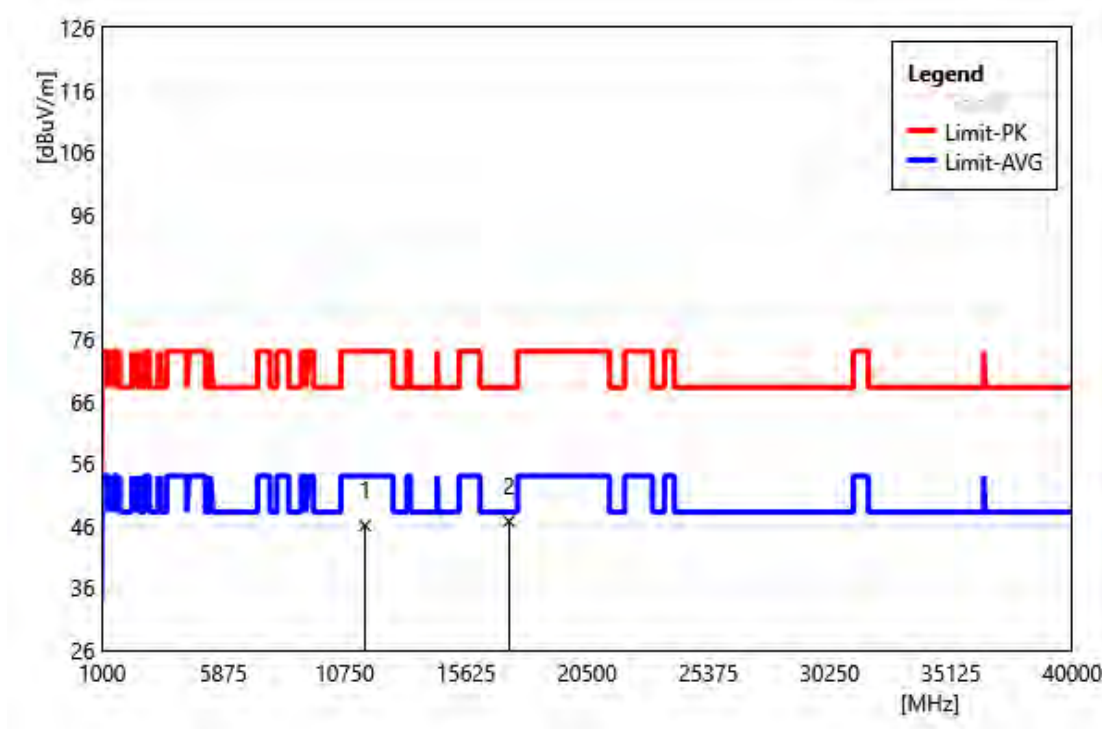


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11570.00         | 38.44           | 7.59                      | 46.03            | 74.00           | -27.97       | PEAK   |
| 2  | 17355.00         | 39.78           | 6.95                      | 46.73            | 68.20           | -21.47       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5825 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

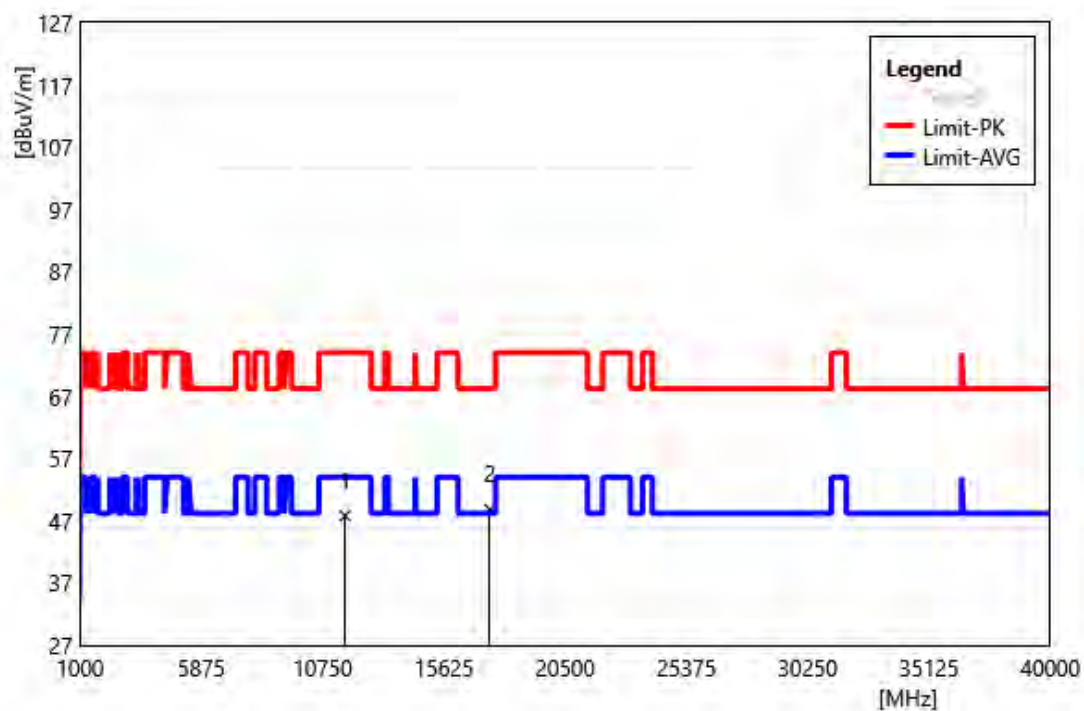


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 39.95           | 7.85                      | 47.80            | 74.00           | -26.20       | PEAK   |
| 2  | 17475.00         | 41.54           | 7.26                      | 48.80            | 68.20           | -19.40       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5825 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

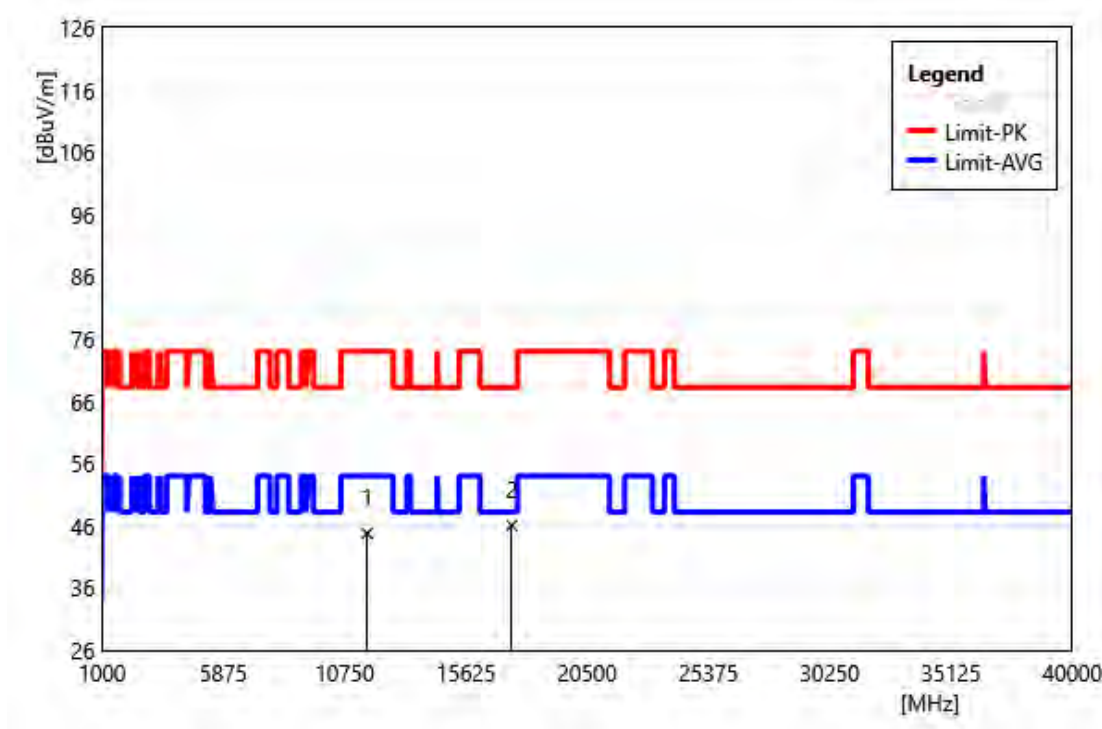


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11650.00         | 36.92           | 7.85                      | 44.77            | 74.00           | -29.23       | PEAK   |
| 2  | 17475.00         | 38.80           | 7.26                      | 46.06            | 68.20           | -22.14       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

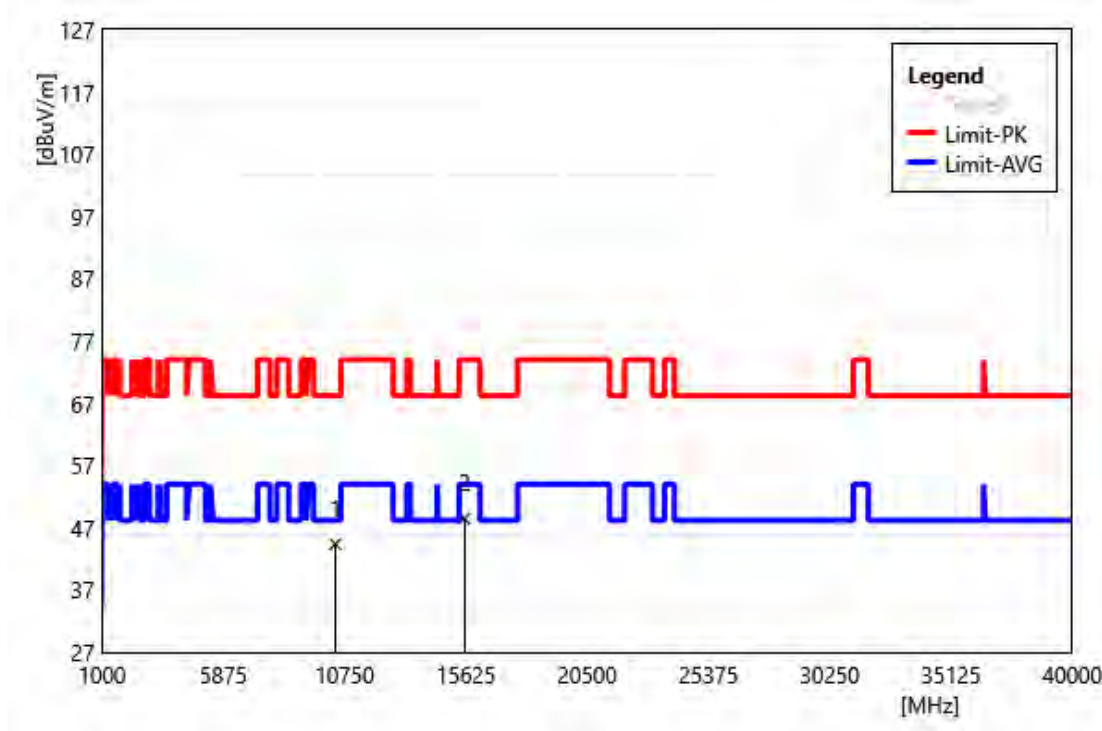


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10380.00         | 37.99           | 6.37                      | 44.37            | 68.20           | -23.83       | PEAK   |
| 2  | 15570.00         | 39.55           | 8.94                      | 48.49            | 74.00           | -25.51       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

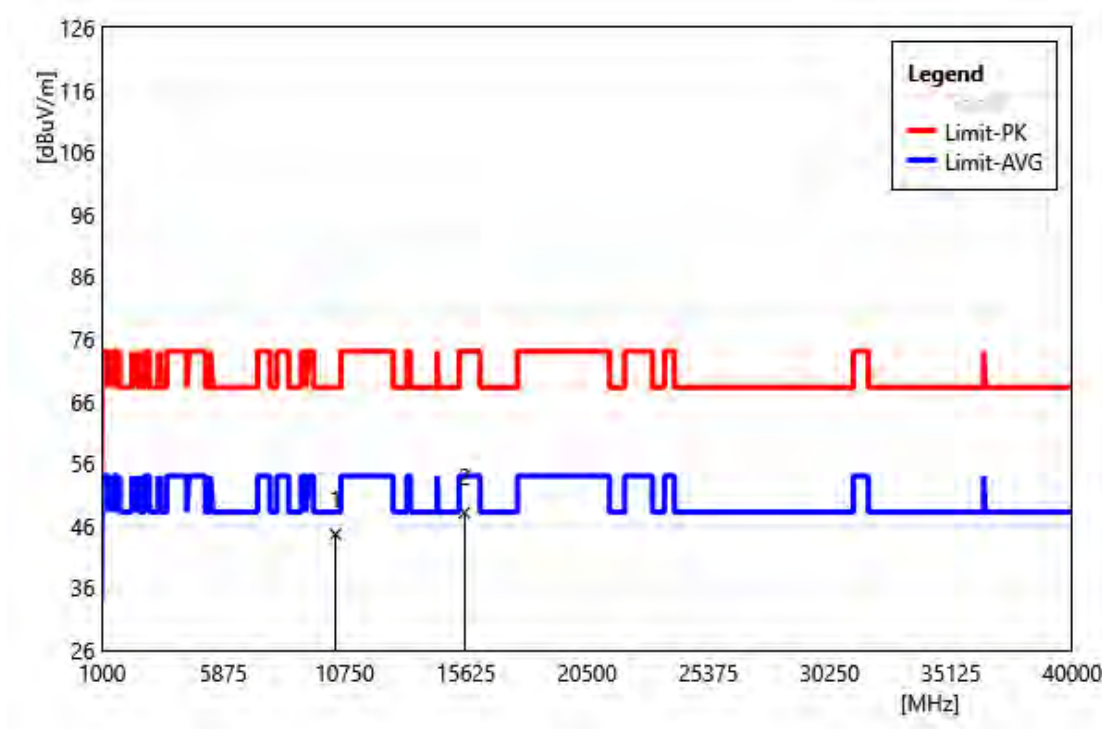


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10380.00         | 38.26           | 6.37                      | 44.64            | 68.20           | -23.56       | PEAK   |
| 2  | 15570.00         | 39.17           | 8.94                      | 48.11            | 74.00           | -25.89       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5230 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

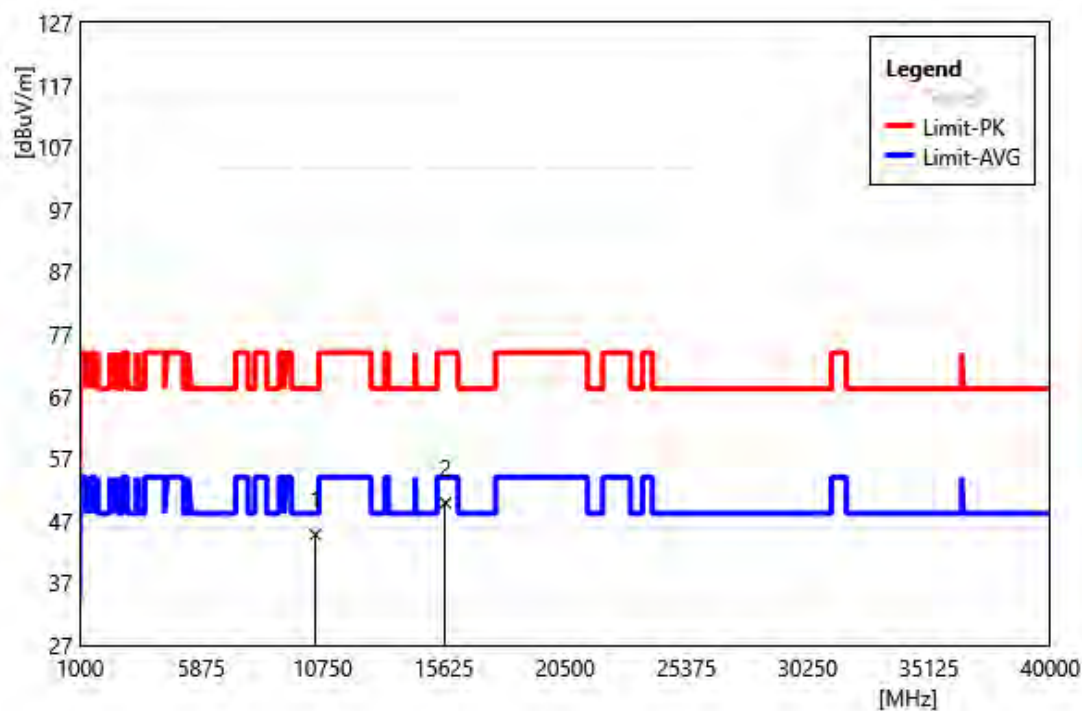


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10460.00         | 38.56           | 6.23                      | 44.79            | 68.20           | -23.41       | PEAK   |
| 2  | 15690.00         | 40.72           | 9.14                      | 49.86            | 74.00           | -24.14       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5230 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

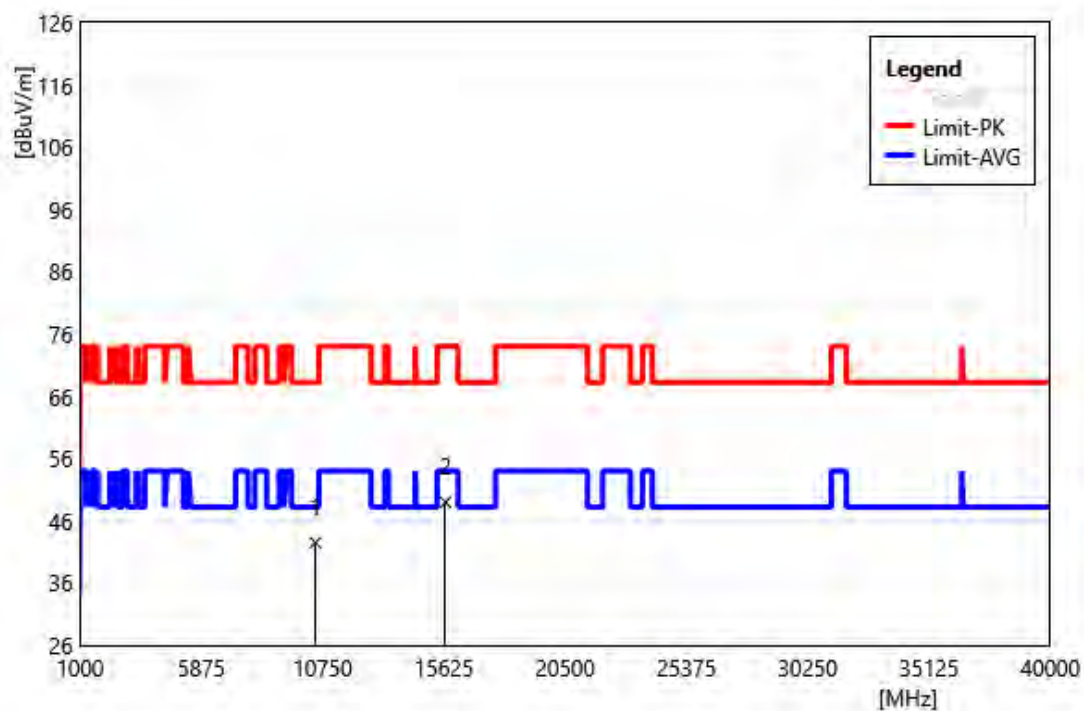


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10460.00         | 36.24           | 6.23                      | 42.47            | 68.20           | -25.73       | PEAK   |
| 2  | 15690.00         | 39.83           | 9.14                      | 48.97            | 74.00           | -25.03       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5270 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

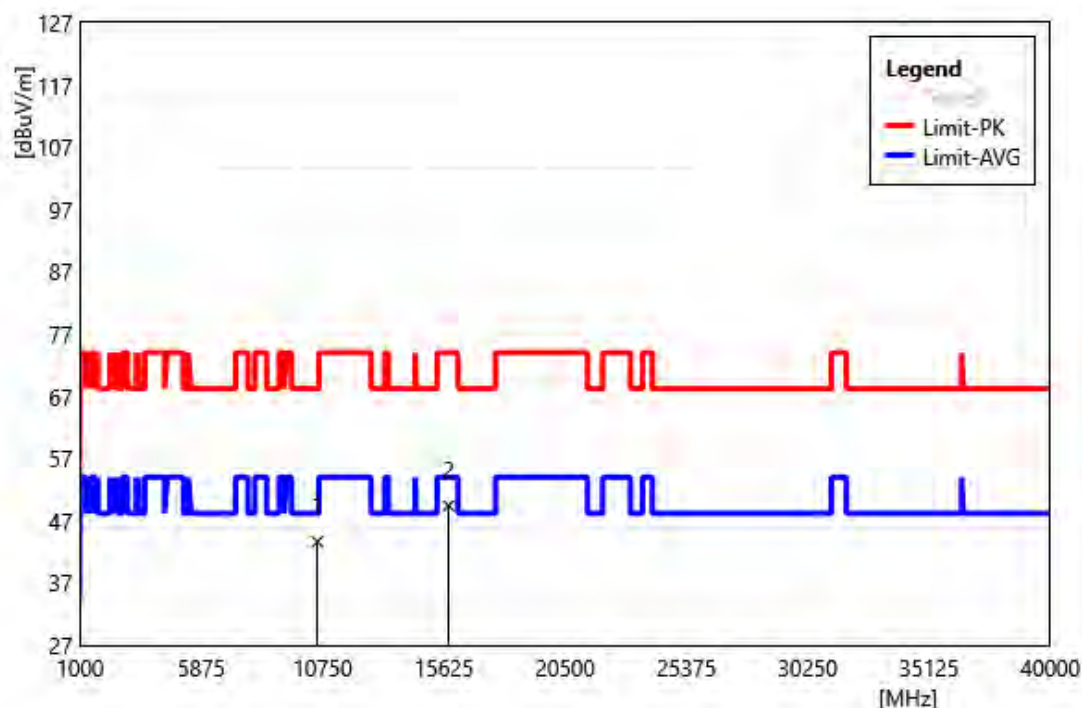


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10540.00         | 37.52           | 6.11                      | 43.64            | 68.20           | -24.56       | PEAK   |
| 2  | 15810.00         | 39.99           | 9.43                      | 49.42            | 74.00           | -24.58       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5270 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

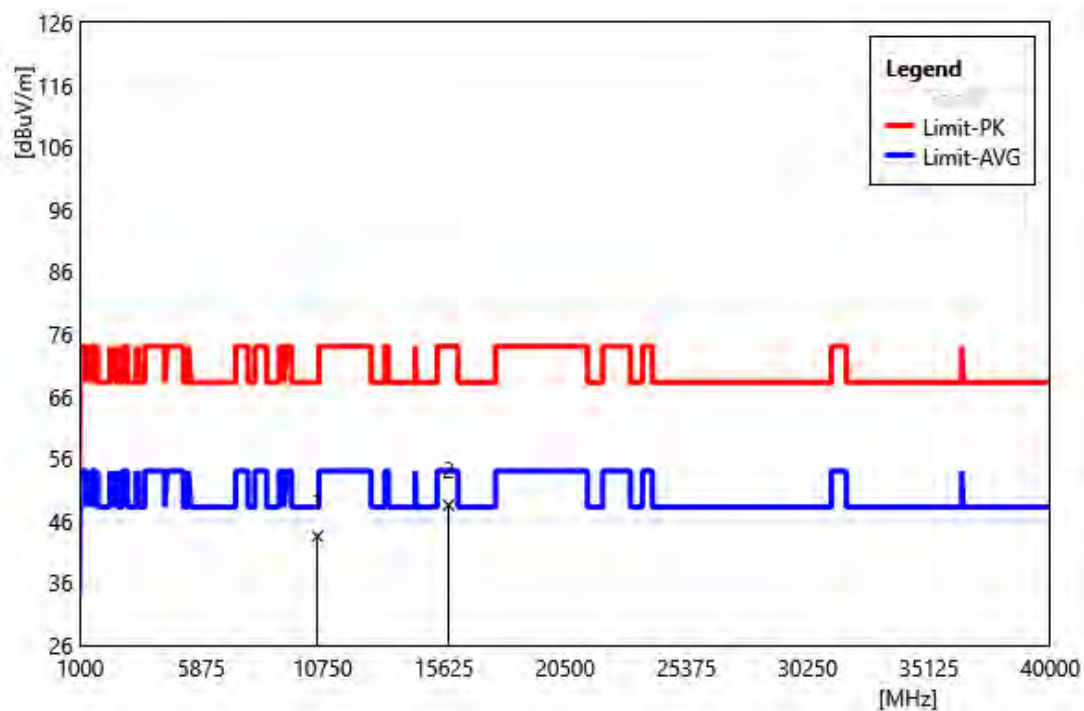


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10540.00         | 37.38           | 6.11                      | 43.50            | 68.20           | -24.70       | PEAK   |
| 2  | 15810.00         | 39.08           | 9.43                      | 48.51            | 74.00           | -25.49       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

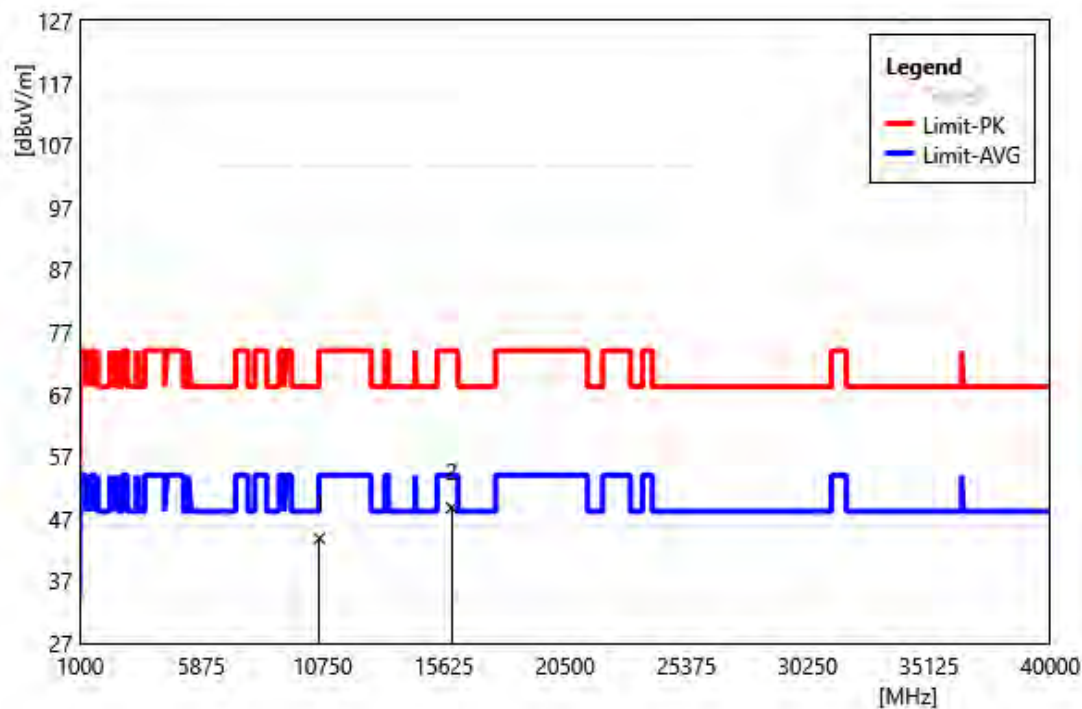


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10620.00         | 37.66           | 6.18                      | 43.84            | 74.00           | -30.16       | PEAK   |
| 2  | 15930.00         | 39.31           | 9.45                      | 48.76            | 74.00           | -25.24       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

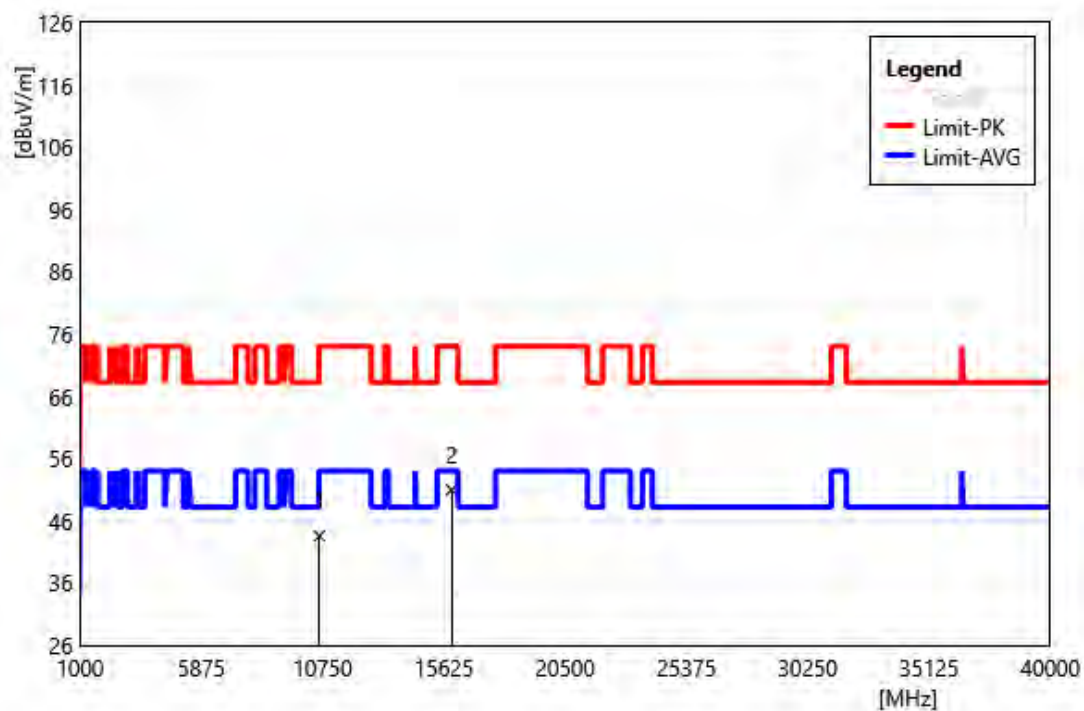


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10620.00         | 37.39           | 6.18                      | 43.57            | 74.00           | -30.43       | PEAK   |
| 2  | 15930.00         | 41.52           | 9.45                      | 50.97            | 74.00           | -23.03       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

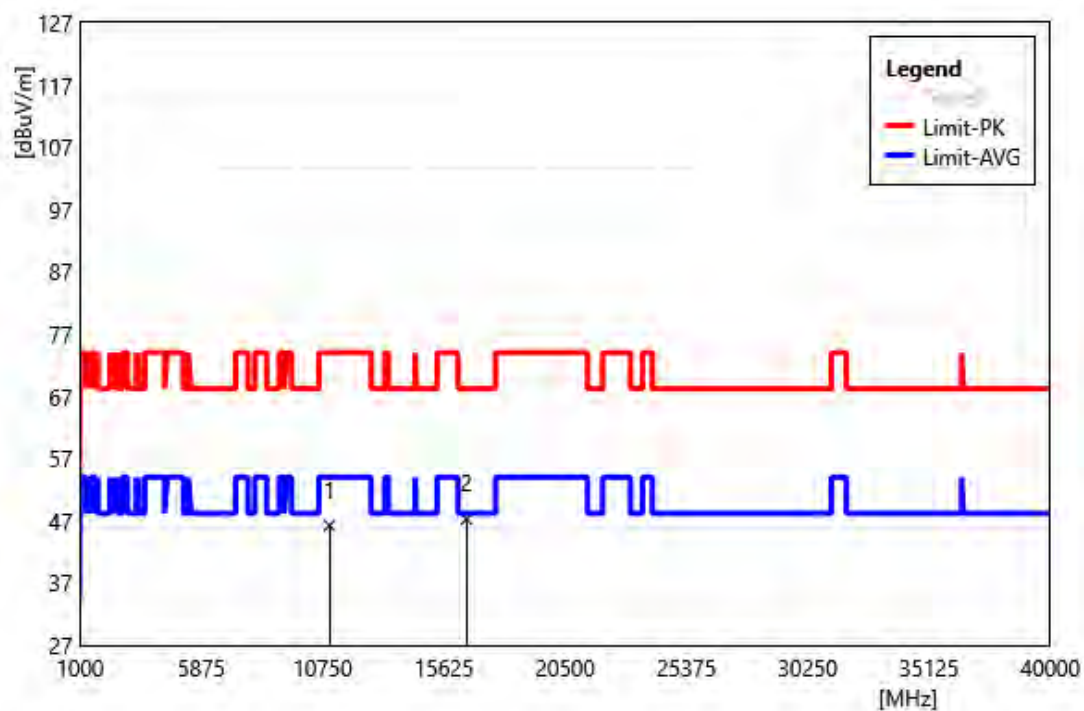


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11020.00         | 40.03           | 6.21                      | 46.25            | 74.00           | -27.75       | PEAK   |
| 2  | 16530.00         | 38.80           | 8.47                      | 47.27            | 68.20           | -20.93       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

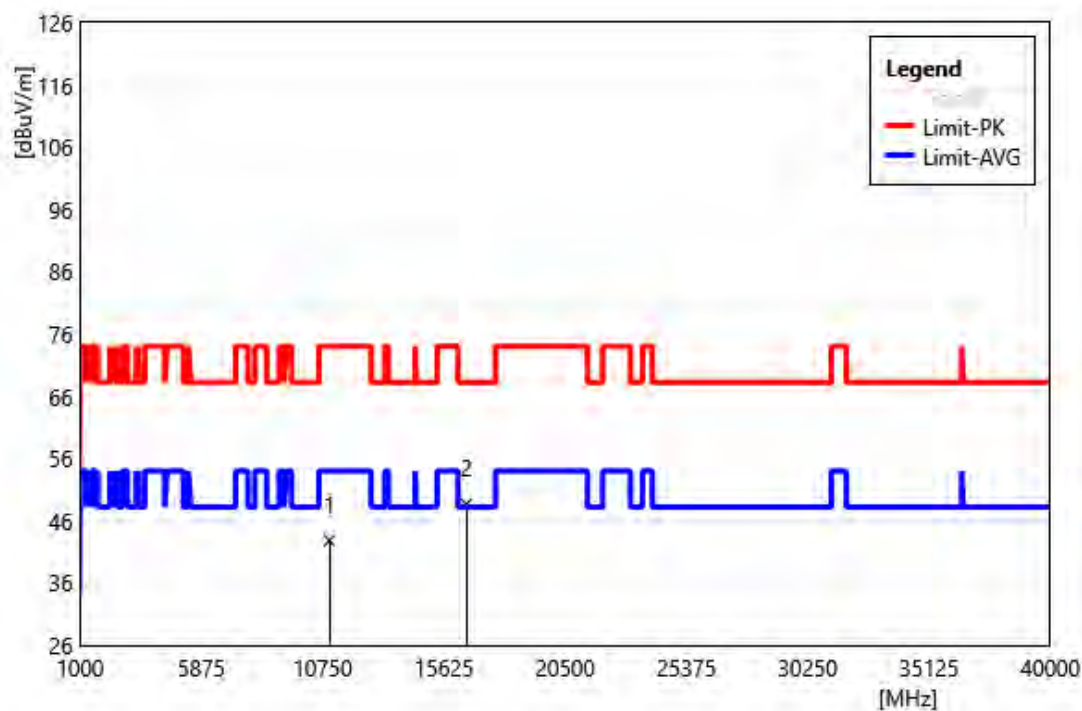


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11020.00         | 36.61           | 6.21                      | 42.82            | 74.00           | -31.18       | PEAK   |
| 2  | 16530.00         | 40.17           | 8.47                      | 48.65            | 68.20           | -19.55       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5550 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

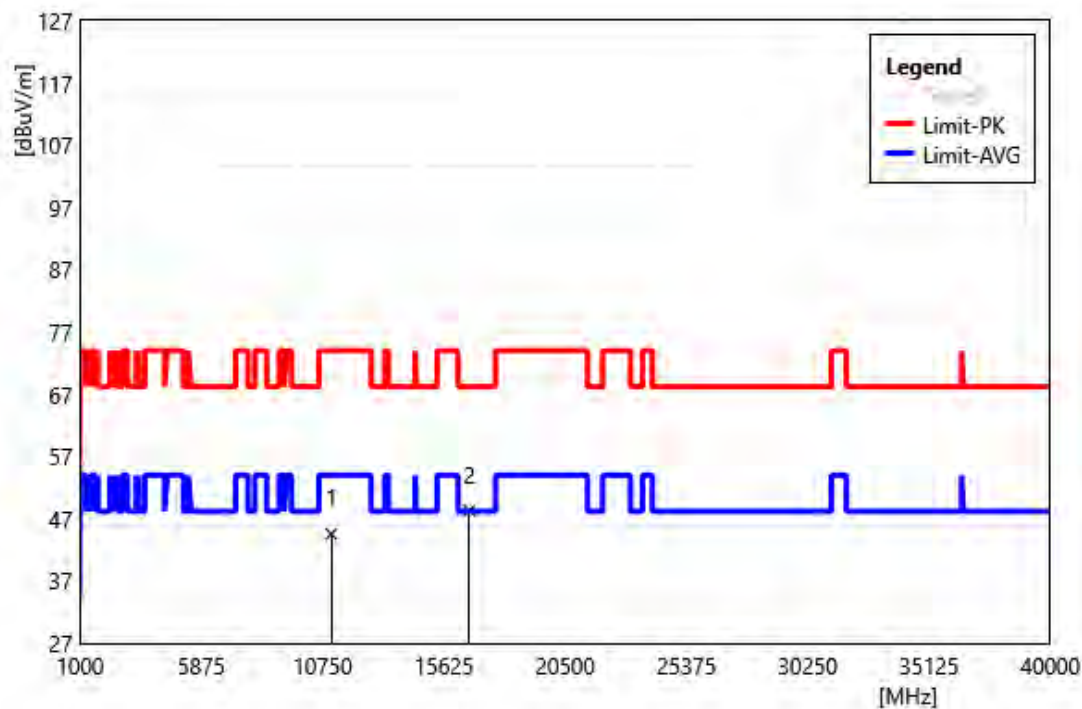


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11100.00         | 37.98           | 6.57                      | 44.55            | 74.00           | -29.45       | PEAK   |
| 2  | 16650.00         | 39.90           | 8.44                      | 48.34            | 68.20           | -19.86       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5550 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

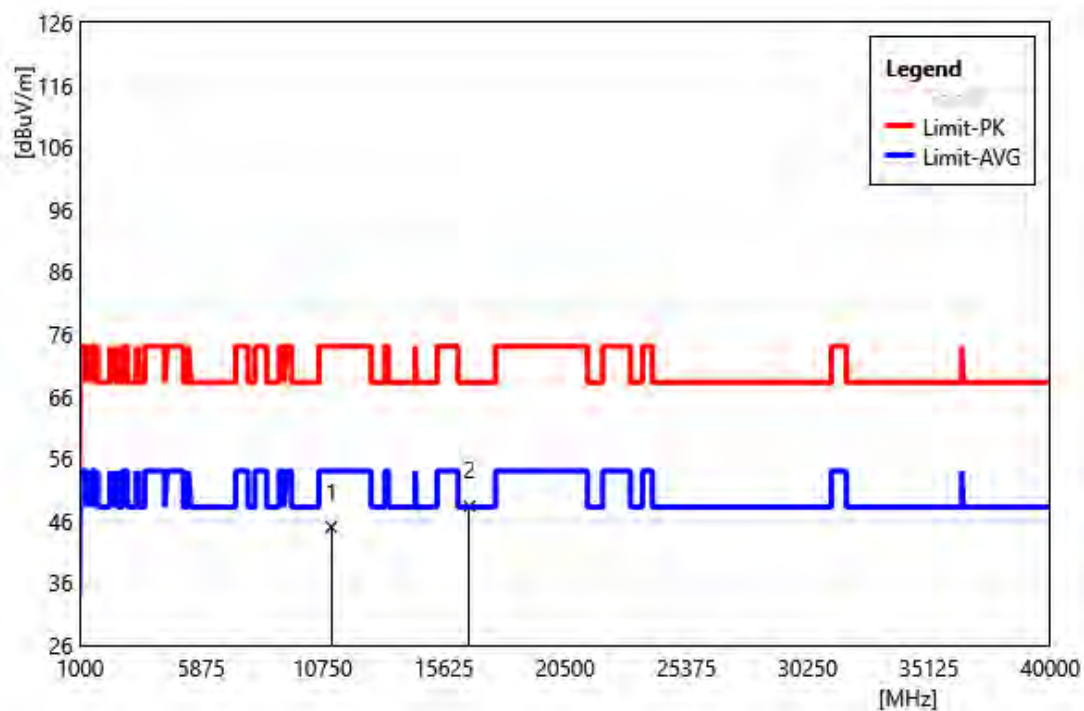


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11100.00         | 38.45           | 6.57                      | 45.01            | 74.00           | -28.99       | PEAK   |
| 2  | 16650.00         | 39.90           | 8.44                      | 48.34            | 68.20           | -19.86       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5670 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

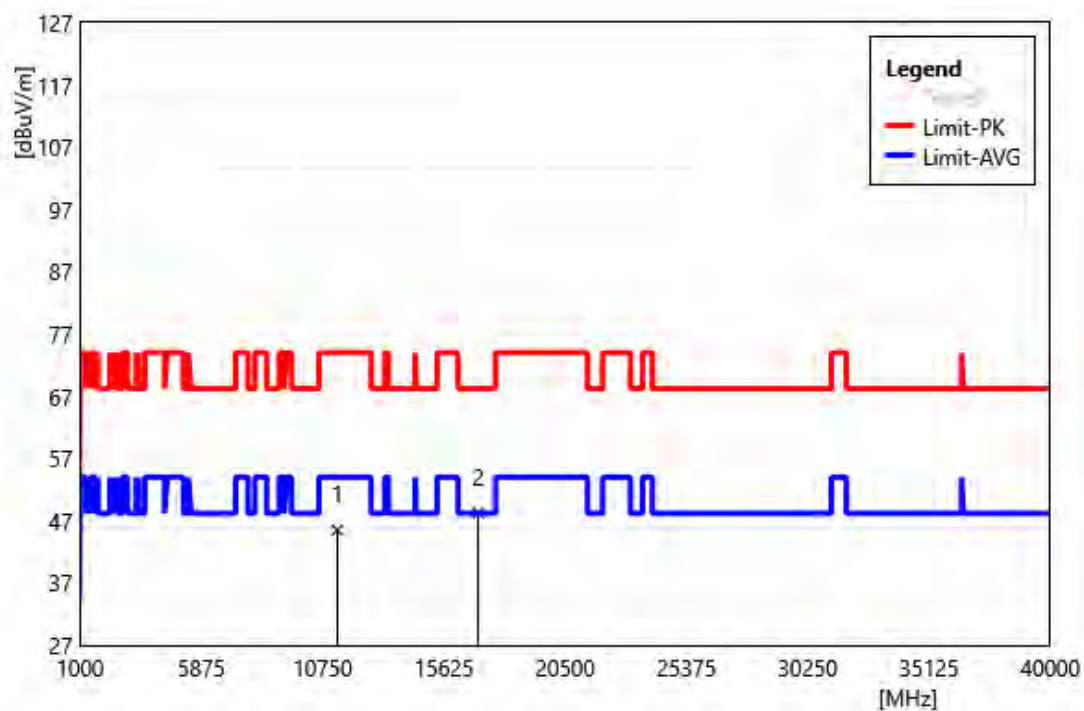


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11340.00         | 38.24           | 7.26                      | 45.49            | 74.00           | -28.51       | PEAK   |
| 2  | 17010.00         | 40.89           | 7.37                      | 48.26            | 68.20           | -19.94       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5670 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

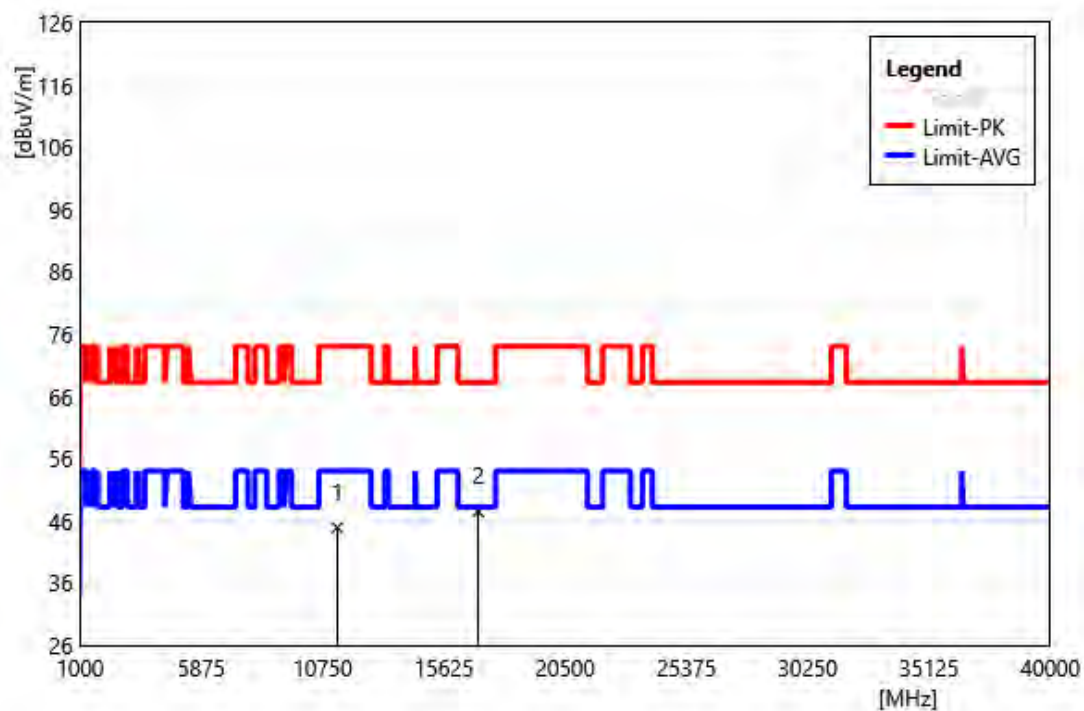


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11340.00         | 37.63           | 7.26                      | 44.89            | 74.00           | -29.11       | PEAK   |
| 2  | 17010.00         | 40.13           | 7.37                      | 47.50            | 68.20           | -20.70       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5755 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

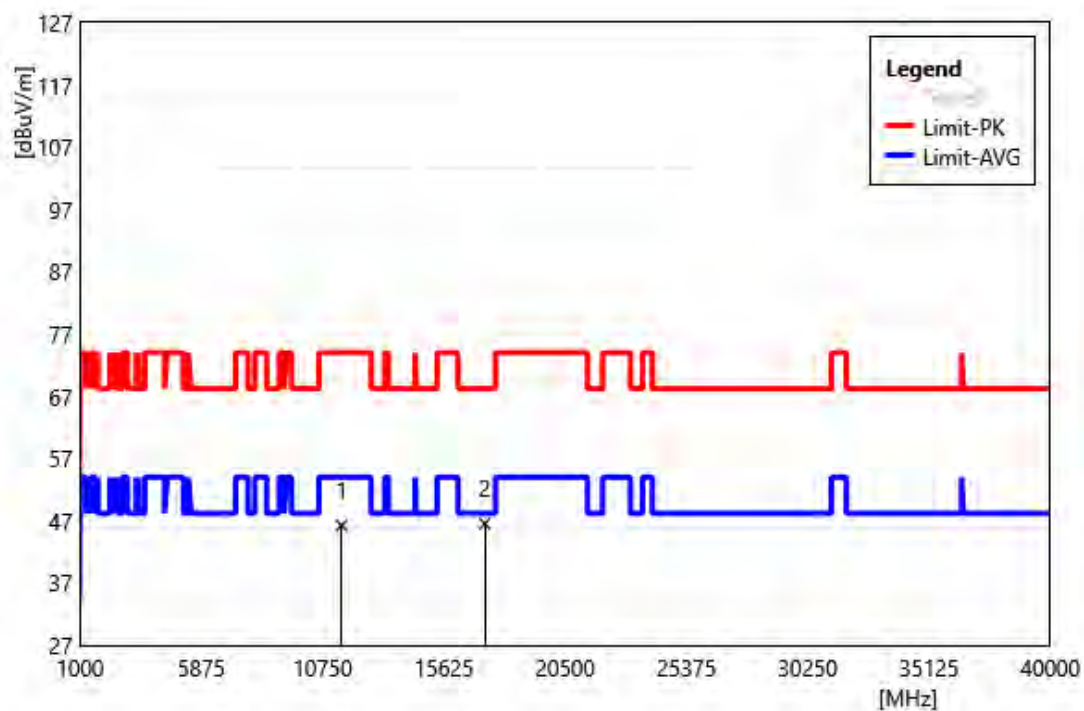


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11510.00         | 38.85           | 7.40                      | 46.25            | 74.00           | -27.75       | PEAK   |
| 2  | 17265.00         | 38.87           | 7.67                      | 46.54            | 68.20           | -21.66       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5755 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

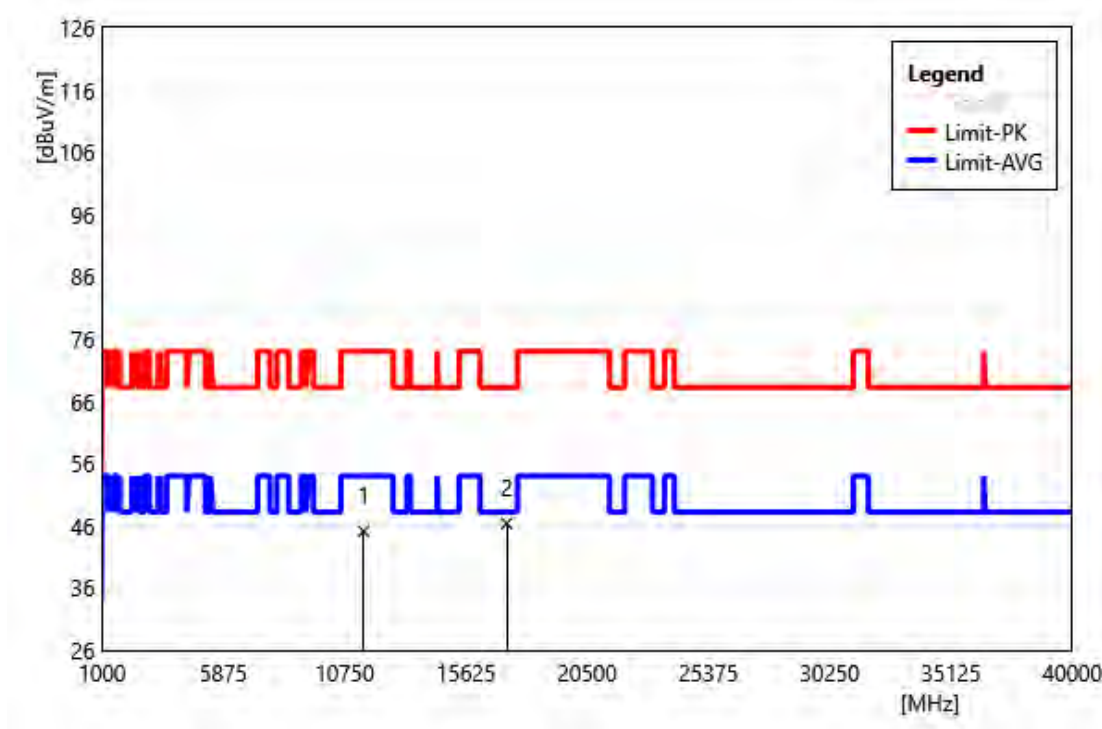


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11510.00         | 37.73           | 7.40                      | 45.13            | 74.00           | -28.87       | PEAK   |
| 2  | 17265.00         | 38.70           | 7.67                      | 46.37            | 68.20           | -21.83       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5795 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

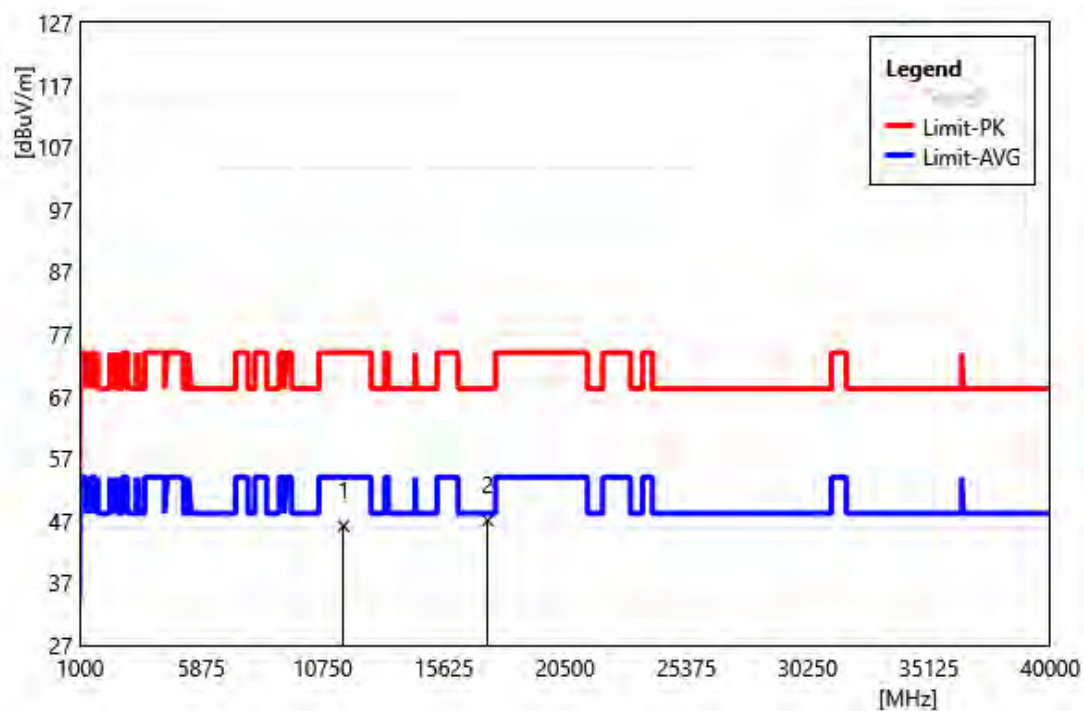


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11590.00         | 38.72           | 7.44                      | 46.16            | 74.00           | -27.84       | PEAK   |
| 2  | 17385.00         | 40.22           | 6.82                      | 47.04            | 68.20           | -21.16       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5795 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

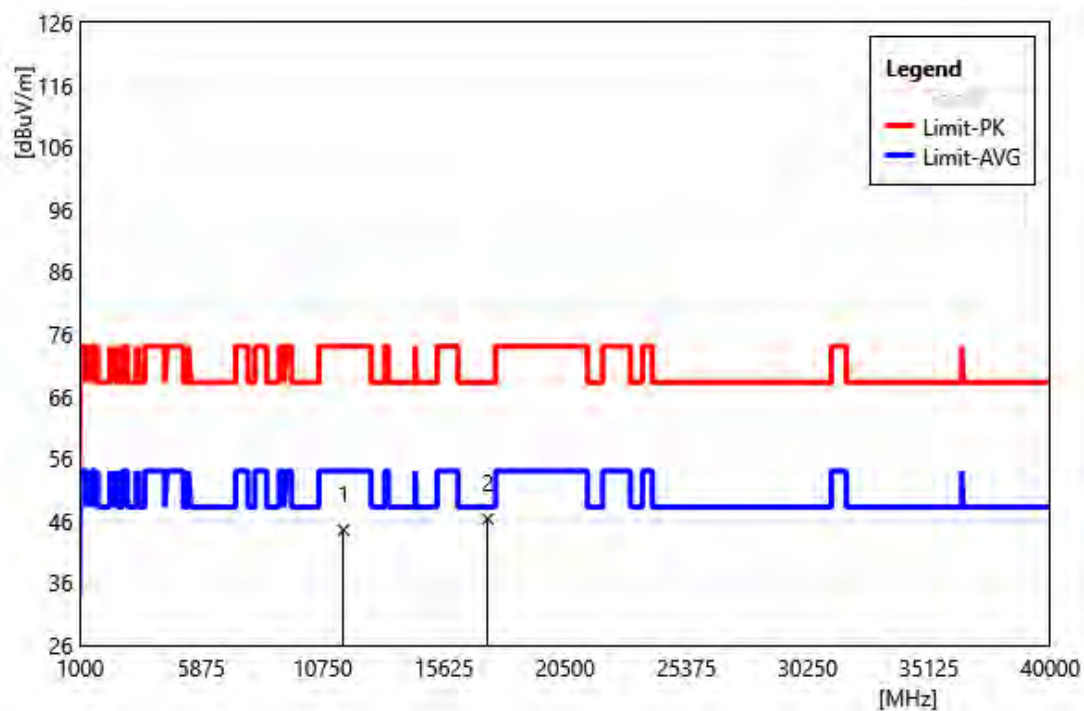


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11590.00         | 37.08           | 7.44                      | 44.52            | 74.00           | -29.48       | PEAK   |
| 2  | 17385.00         | 39.45           | 6.82                      | 46.27            | 68.20           | -21.93       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

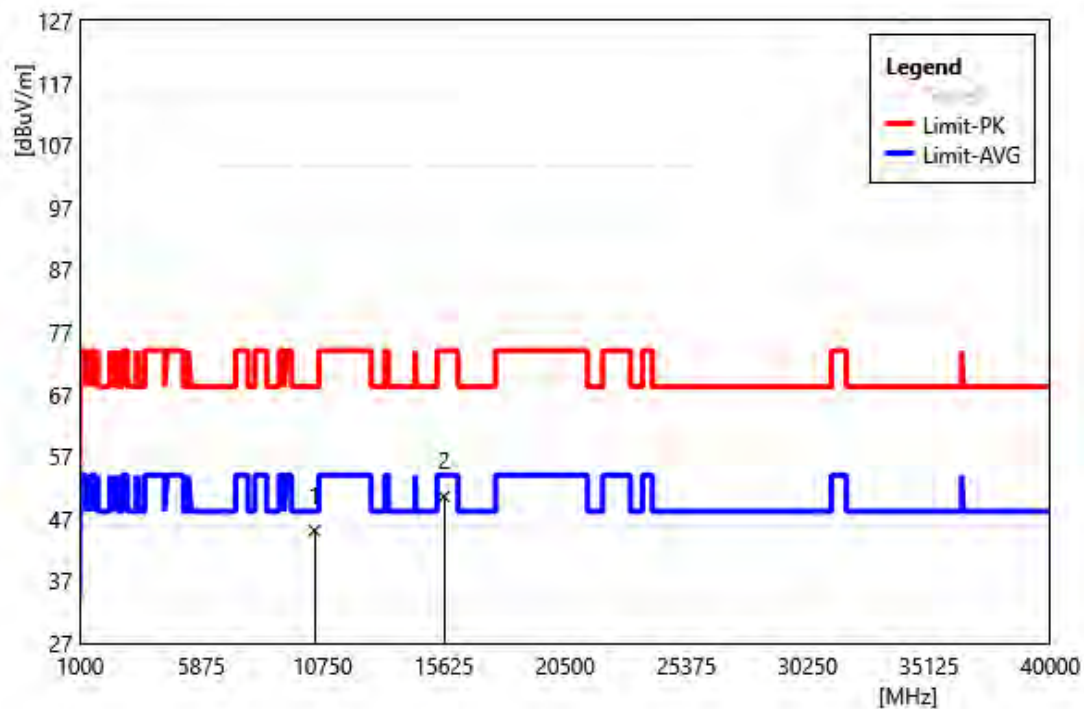


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10420.00         | 38.86           | 6.25                      | 45.11            | 68.20           | -23.09       | PEAK   |
| 2  | 15630.00         | 41.36           | 9.20                      | 50.56            | 74.00           | -23.44       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

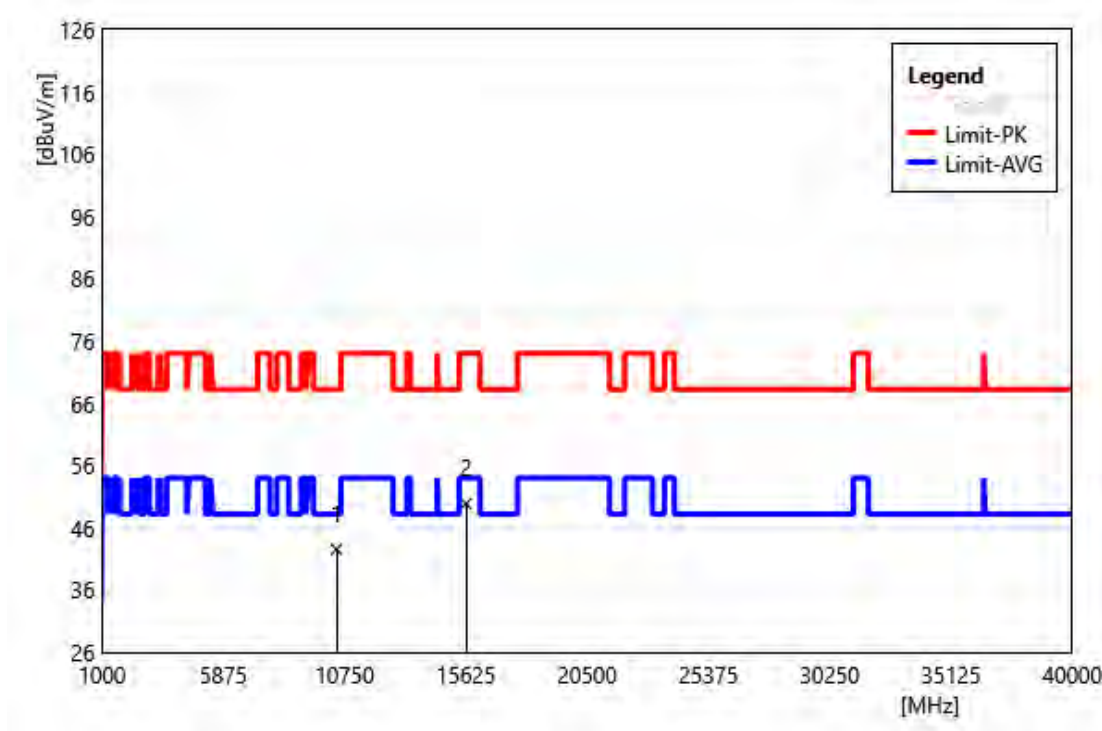


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10420.00         | 36.28           | 6.25                      | 42.53            | 68.20           | -25.67       | PEAK   |
| 2  | 15630.00         | 40.69           | 9.20                      | 49.89            | 74.00           | -24.11       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

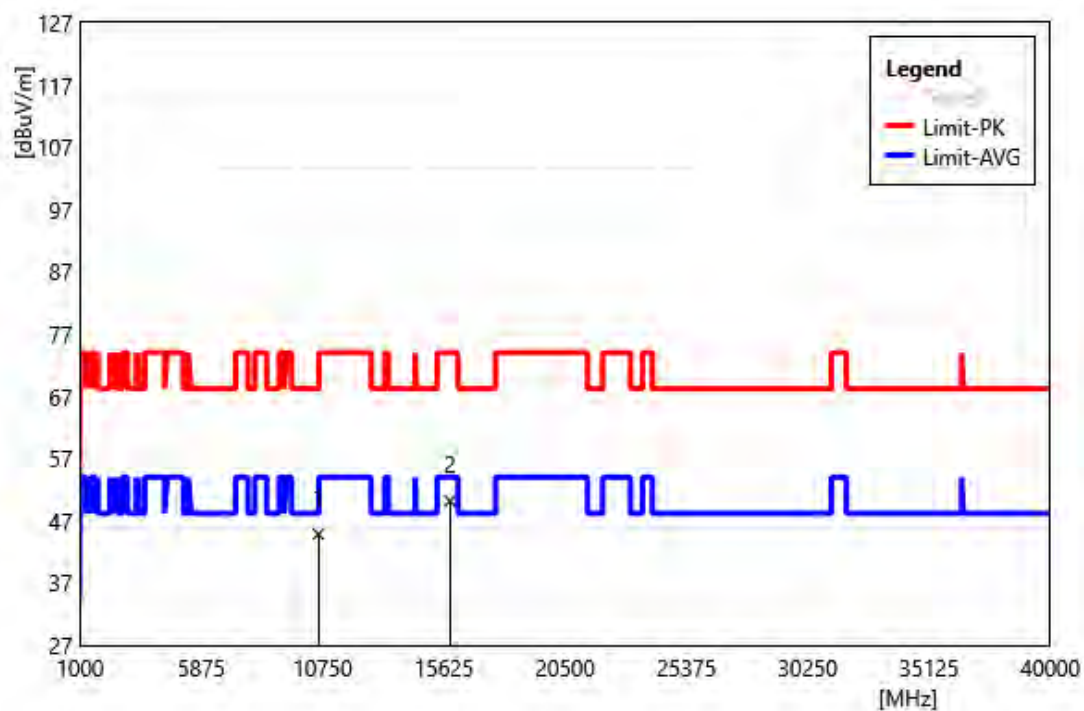


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10580.00         | 38.27           | 6.60                      | 44.87            | 68.20           | -23.33       | PEAK   |
| 2  | 15870.00         | 40.56           | 9.64                      | 50.20            | 74.00           | -23.80       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

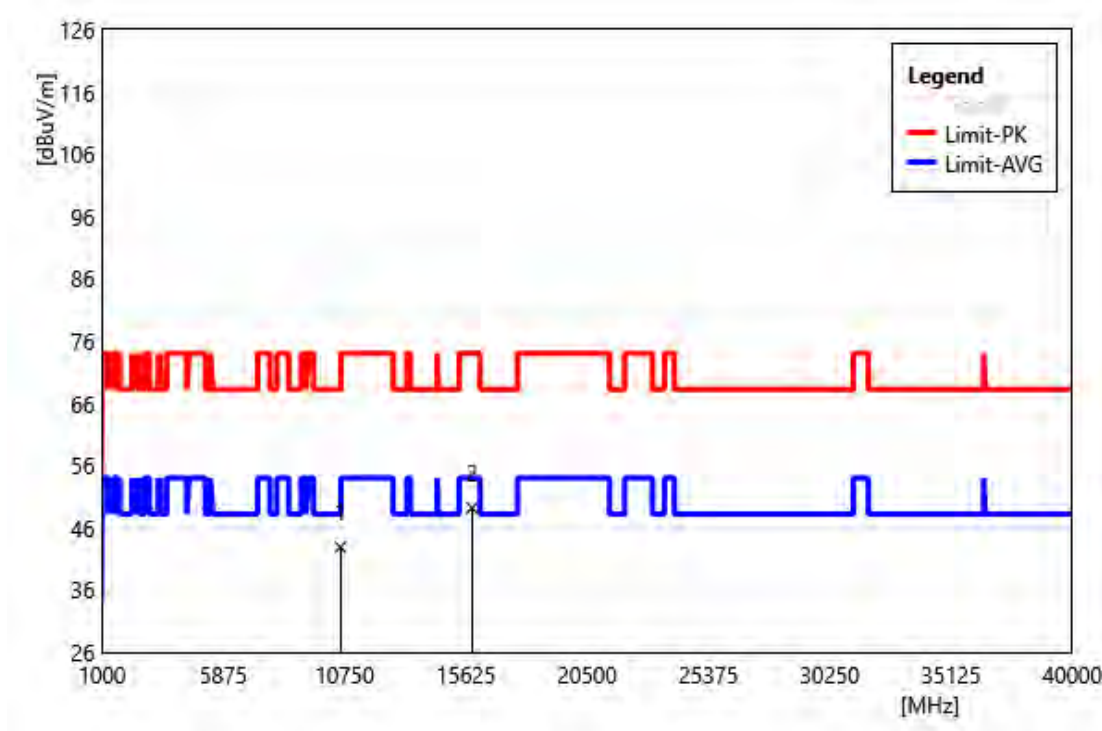


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 10580.00         | 36.29           | 6.60                      | 42.89            | 68.20           | -25.31       | PEAK   |
| 2  | 15870.00         | 39.53           | 9.64                      | 49.17            | 74.00           | -24.83       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

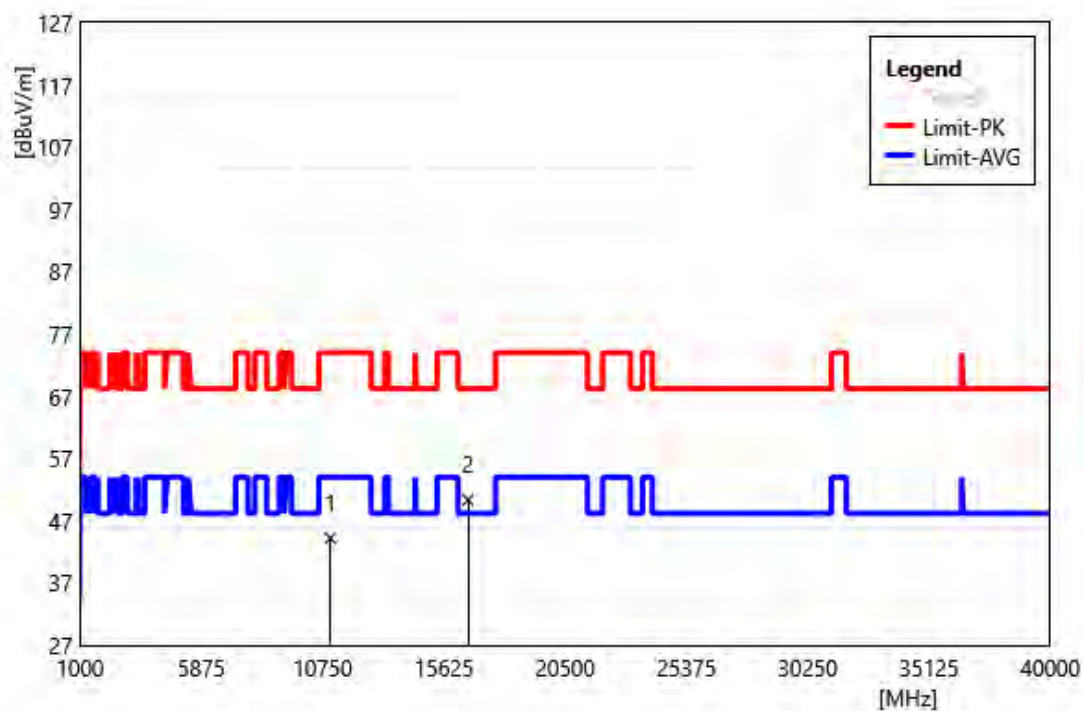


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11060.00         | 37.83           | 6.39                      | 44.22            | 74.00           | -29.78       | PEAK   |
| 2  | 16590.00         | 42.10           | 8.25                      | 50.35            | 68.20           | -17.85       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

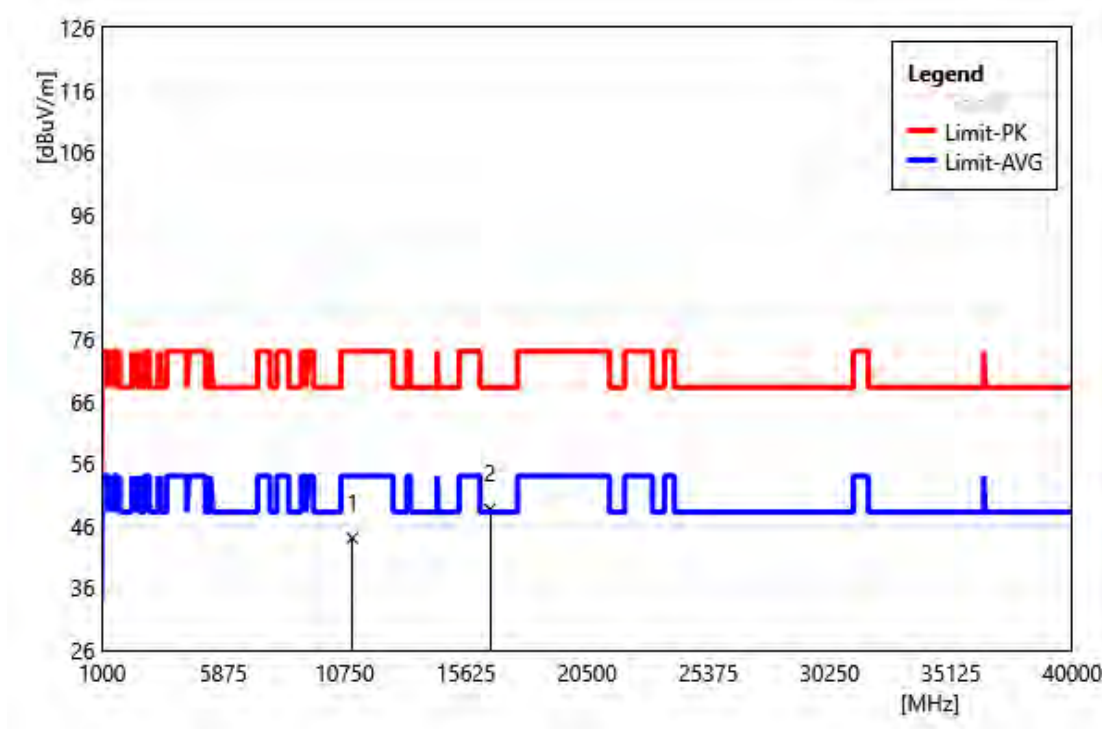


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11060.00         | 37.63           | 6.39                      | 44.02            | 74.00           | -29.98       | PEAK   |
| 2  | 16590.00         | 40.38           | 8.25                      | 48.64            | 68.20           | -19.56       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

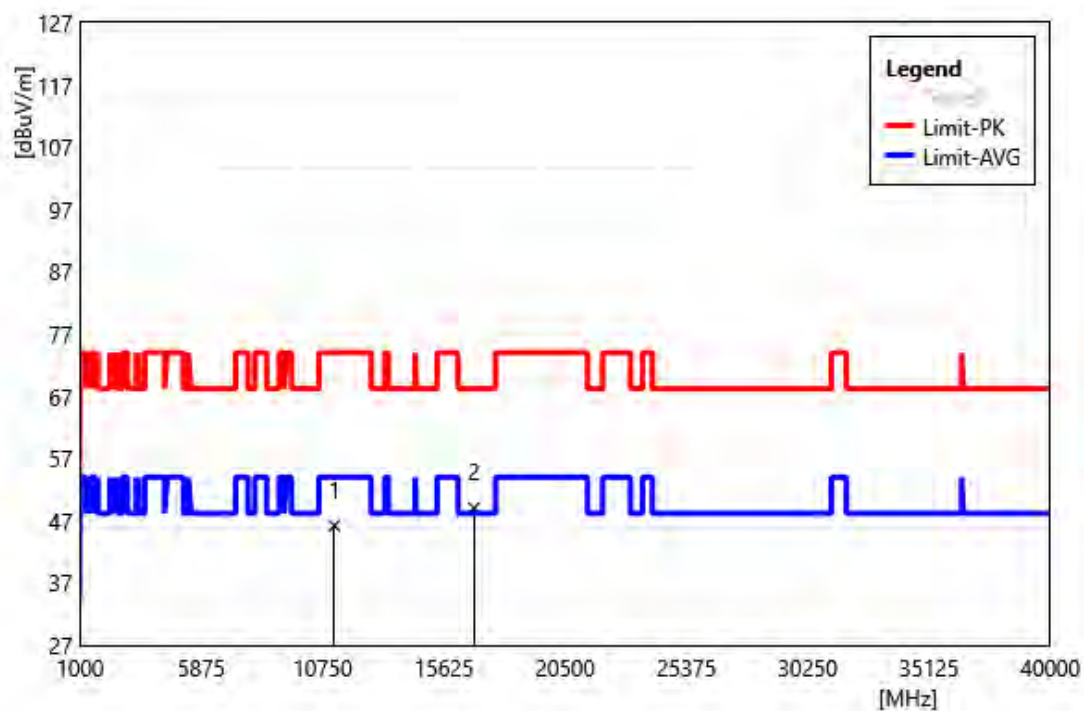


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11220.00         | 39.07           | 7.14                      | 46.21            | 74.00           | -27.79       | PEAK   |
| 2  | 16830.00         | 41.19           | 7.86                      | 49.05            | 68.20           | -19.15       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

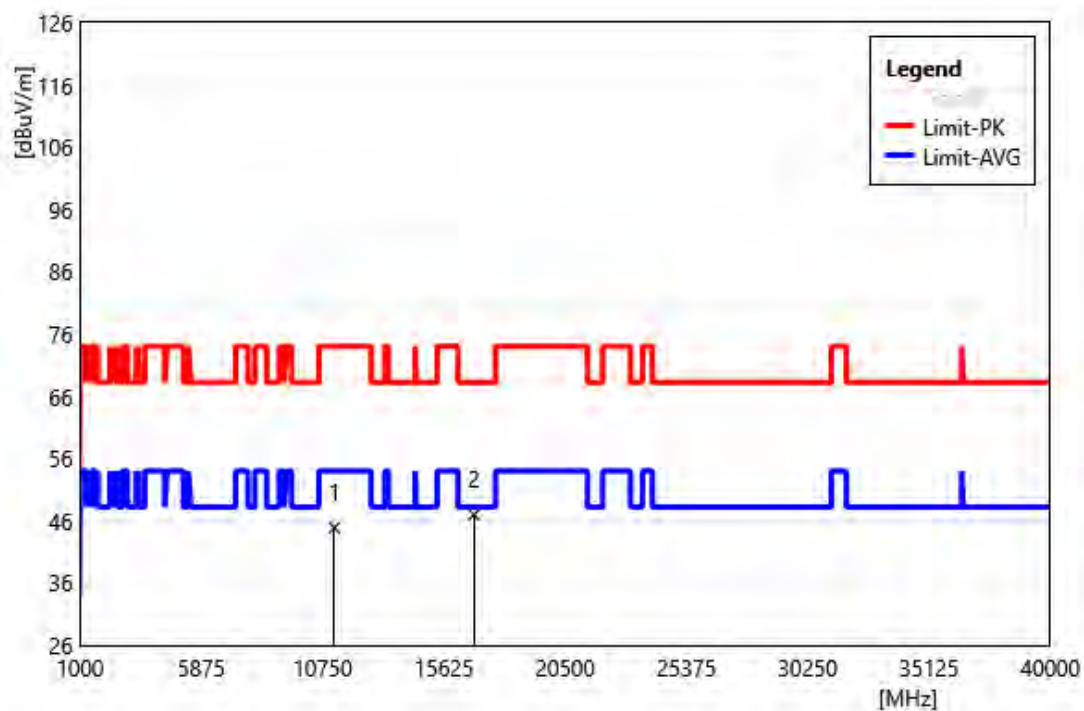


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11220.00         | 37.75           | 7.14                      | 44.89            | 74.00           | -29.11       | PEAK   |
| 2  | 16830.00         | 39.11           | 7.86                      | 46.97            | 68.20           | -21.23       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

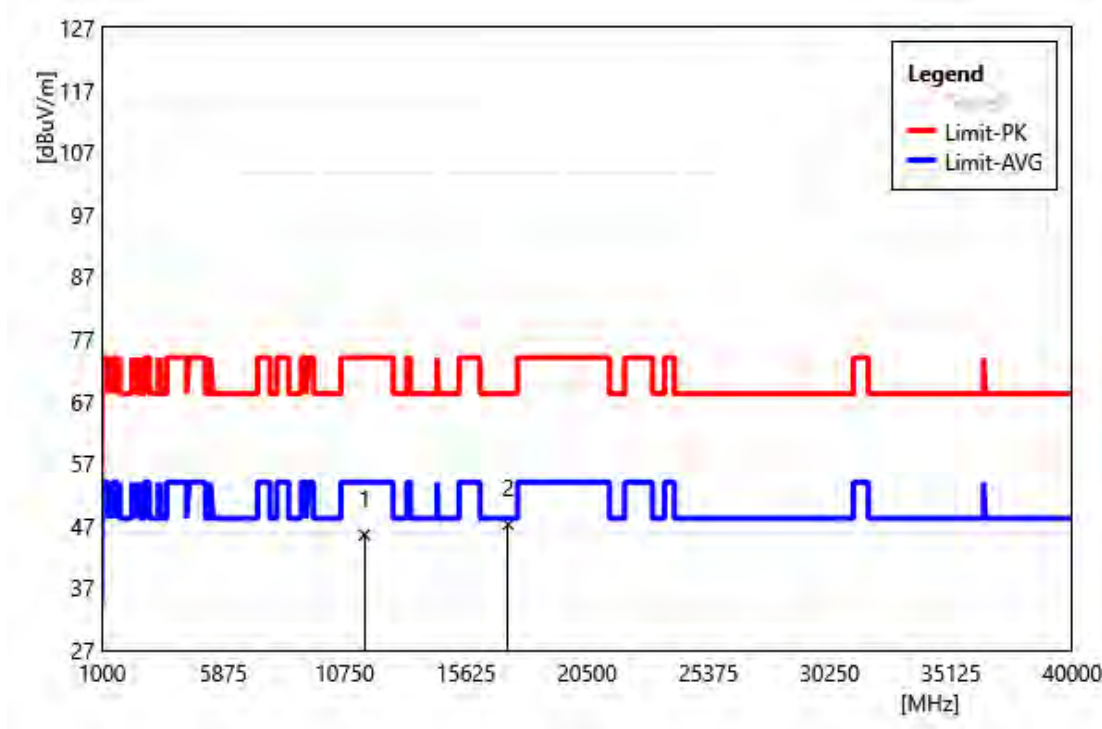

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11550.00         | 37.92           | 7.64                      | 45.55            | 74.00           | -28.45       | PEAK   |
| 2  | 17325.00         | 40.13           | 7.09                      | 47.22            | 68.20           | -20.98       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

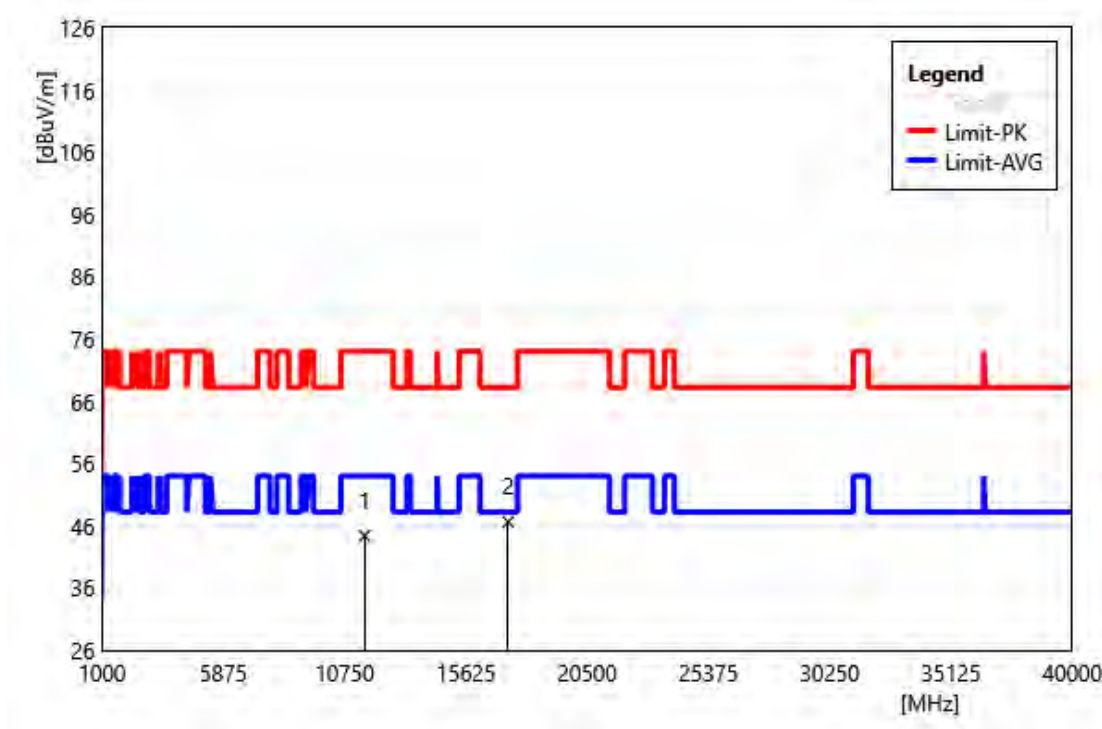


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 11550.00         | 36.77           | 7.64                      | 44.41            | 74.00           | -29.59       | PEAK   |
| 2  | 17325.00         | 39.53           | 7.09                      | 46.62            | 68.20           | -21.58       | PEAK   |

Band Edge


Peak

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

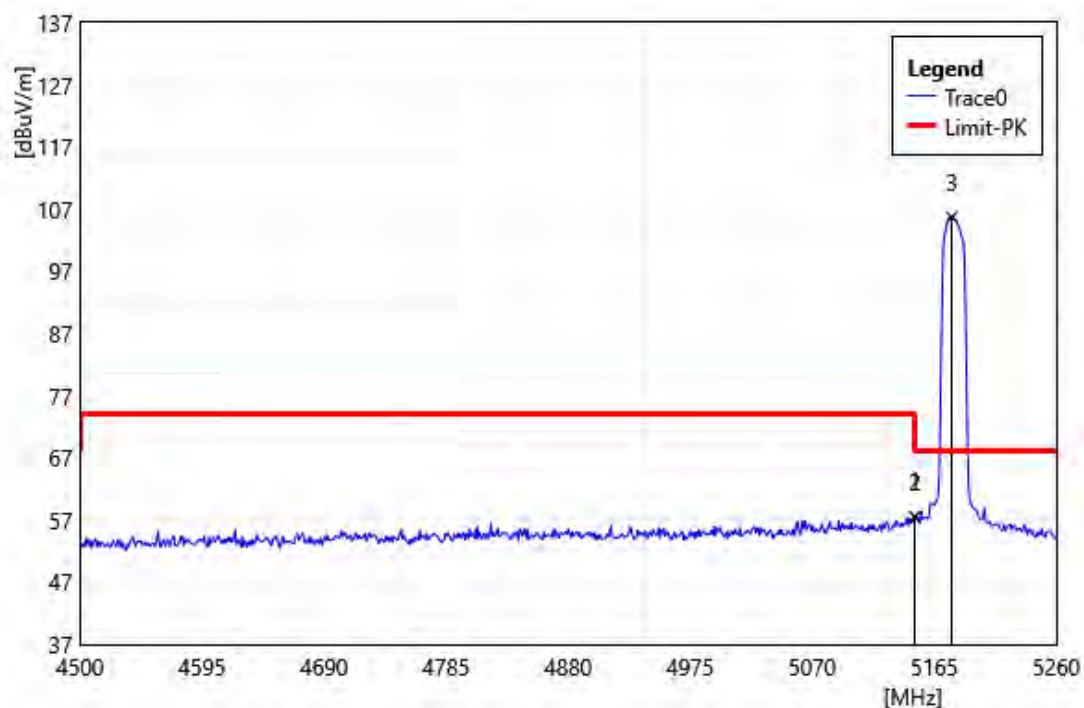


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5149.80          | 56.04           | 1.55                      | 57.59            | 74.00           | -16.41       | PEAK   |
| 2  | 5150.00          | 55.86           | 1.56                      | 57.42            | 74.00           | -16.58       | PEAK   |
| 3  | 5178.68          | 104.12          | 1.57                      | 105.69           | 68.20           | 37.49        | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

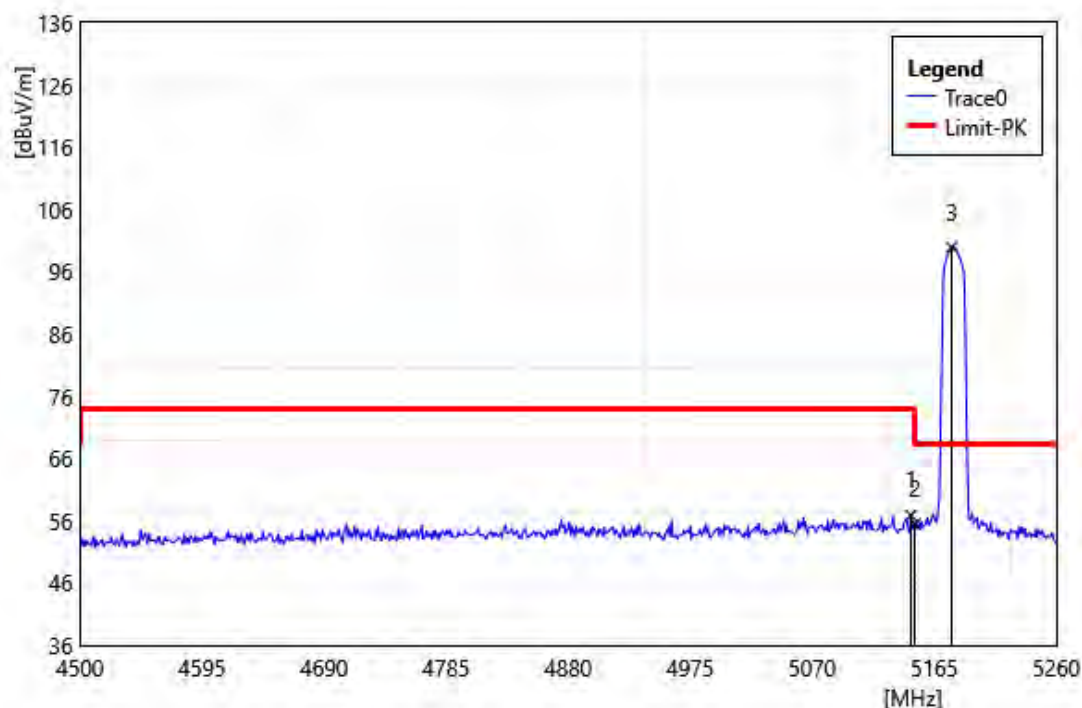


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5146.76          | 55.33           | 1.56                      | 56.89            | 74.00           | -17.11       | PEAK   |
| 2  | 5150.00          | 53.95           | 1.56                      | 55.51            | 74.00           | -18.49       | PEAK   |
| 3  | 5178.68          | 98.35           | 1.57                      | 99.92            | 68.20           | 31.72        | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

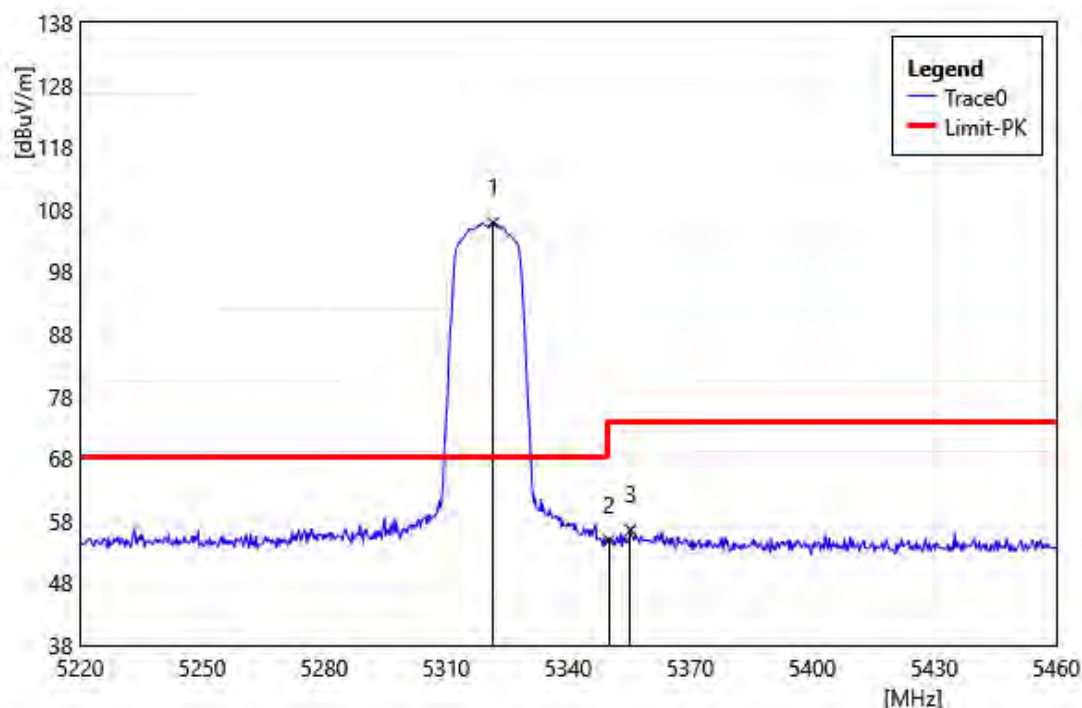


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5321.52          | 104.60          | 1.28                      | 105.88           | 68.20           | 37.68        | PEAK   |
| 2  | 5350.00          | 53.70           | 1.16                      | 54.86            | 74.00           | -19.14       | PEAK   |
| 3  | 5355.36          | 55.34           | 1.19                      | 56.53            | 74.00           | -17.48       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

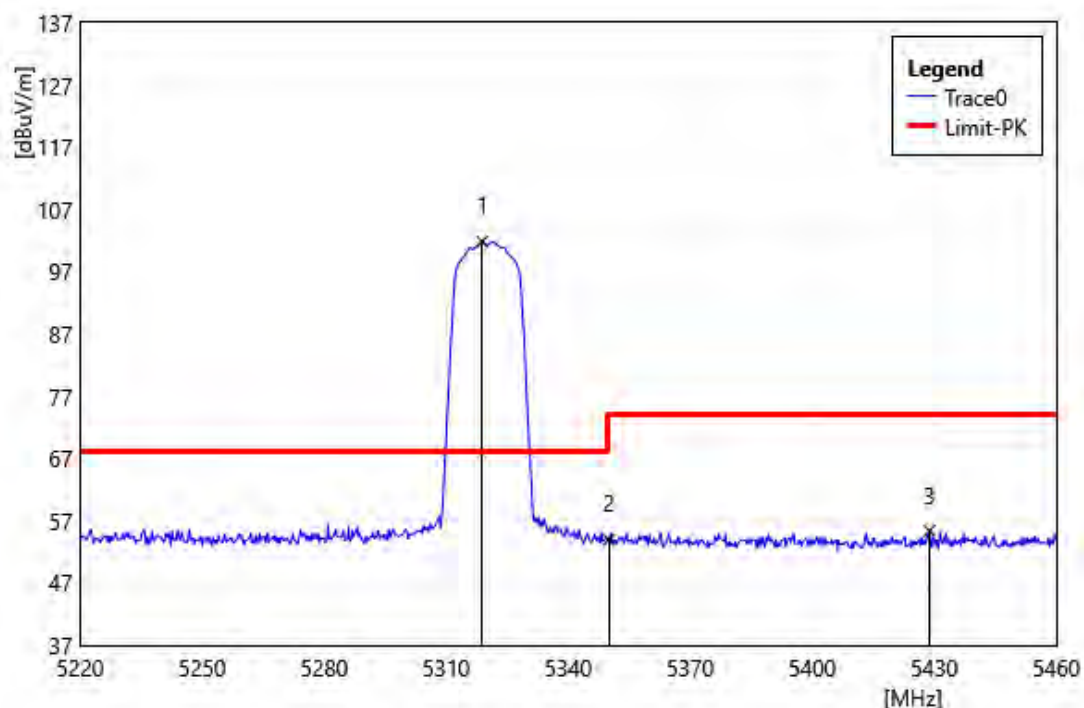


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5318.88          | 100.54          | 1.30                      | 101.84           | 68.20           | 33.64        | PEAK   |
| 2  | 5350.00          | 52.81           | 1.16                      | 53.97            | 74.00           | -20.03       | PEAK   |
| 3  | 5428.80          | 53.84           | 1.56                      | 55.40            | 74.00           | -18.60       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

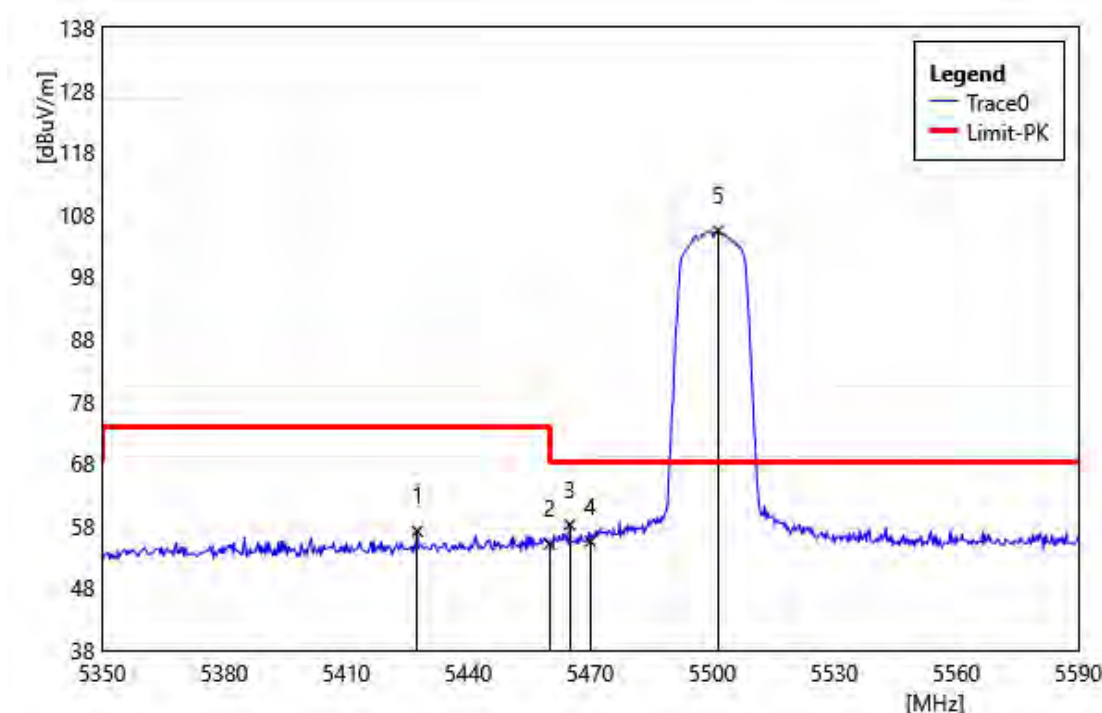


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5427.52          | 55.57           | 1.55                      | 57.12            | 74.00           | -16.88       | PEAK   |
| 2  | 5460.00          | 53.38           | 1.69                      | 55.07            | 74.00           | -18.93       | PEAK   |
| 3  | 5464.96          | 56.48           | 1.71                      | 58.19            | 68.20           | -10.01       | PEAK   |
| 4  | 5470.00          | 53.78           | 1.72                      | 55.50            | 68.20           | -12.70       | PEAK   |
| 5  | 5501.44          | 103.56          | 1.84                      | 105.40           | 68.20           | 37.20        | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

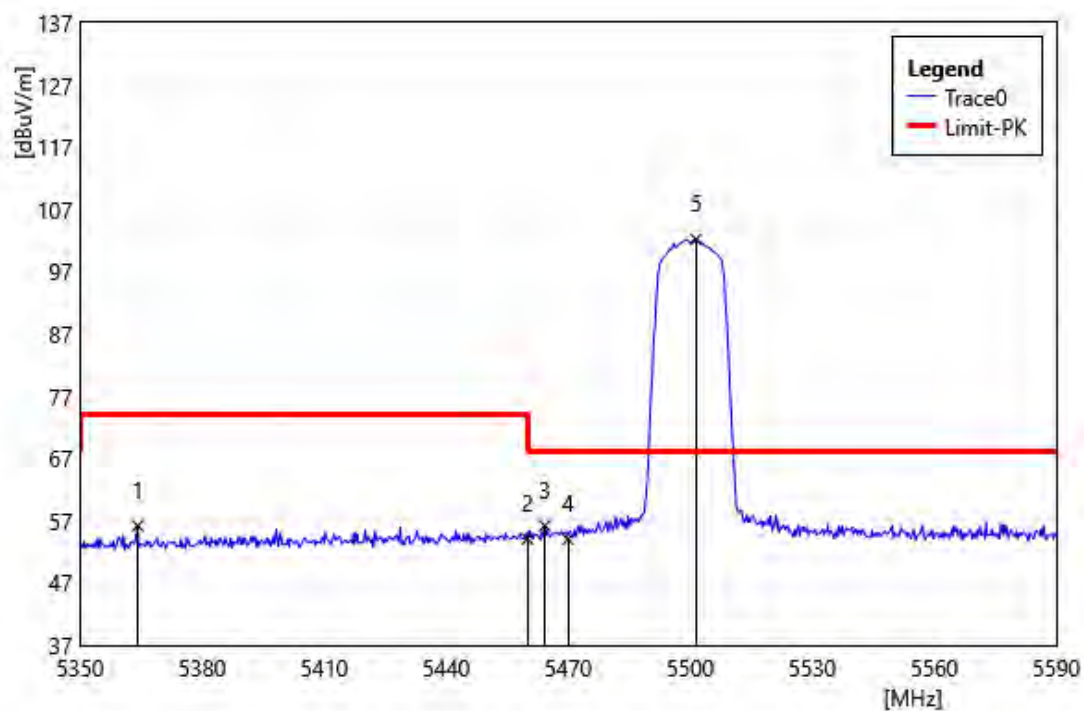


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5364.16          | 54.96           | 1.24                      | 56.20            | 74.00           | -17.80       | PEAK   |
| 2  | 5460.00          | 52.41           | 1.69                      | 54.10            | 74.00           | -19.90       | PEAK   |
| 3  | 5464.24          | 54.48           | 1.71                      | 56.20            | 68.20           | -12.01       | PEAK   |
| 4  | 5470.00          | 52.31           | 1.72                      | 54.03            | 68.20           | -14.17       | PEAK   |
| 5  | 5501.44          | 100.37          | 1.84                      | 102.21           | 68.20           | 34.01        | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5700 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

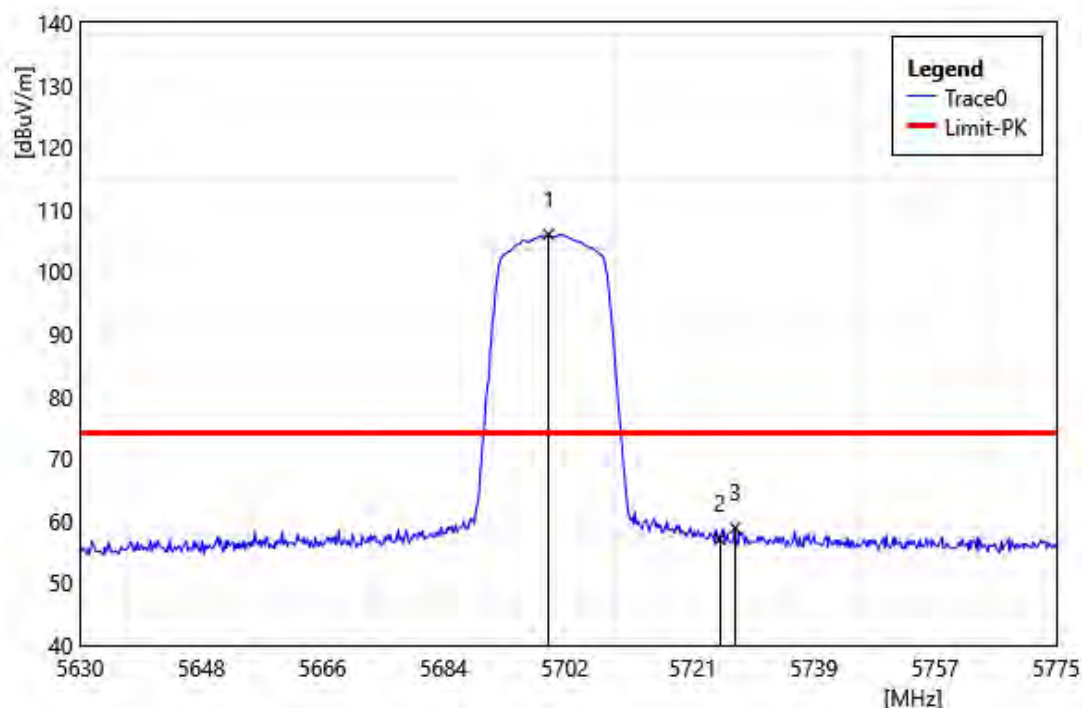


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5699.60          | 103.49          | 2.52                      | 106.01           | 74.00           | 32.01        | PEAK   |
| 2  | 5725.00          | 54.34           | 2.69                      | 57.03            | 74.00           | -16.97       | PEAK   |
| 3  | 5727.30          | 56.16           | 2.70                      | 58.86            | 74.00           | -15.14       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5700 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

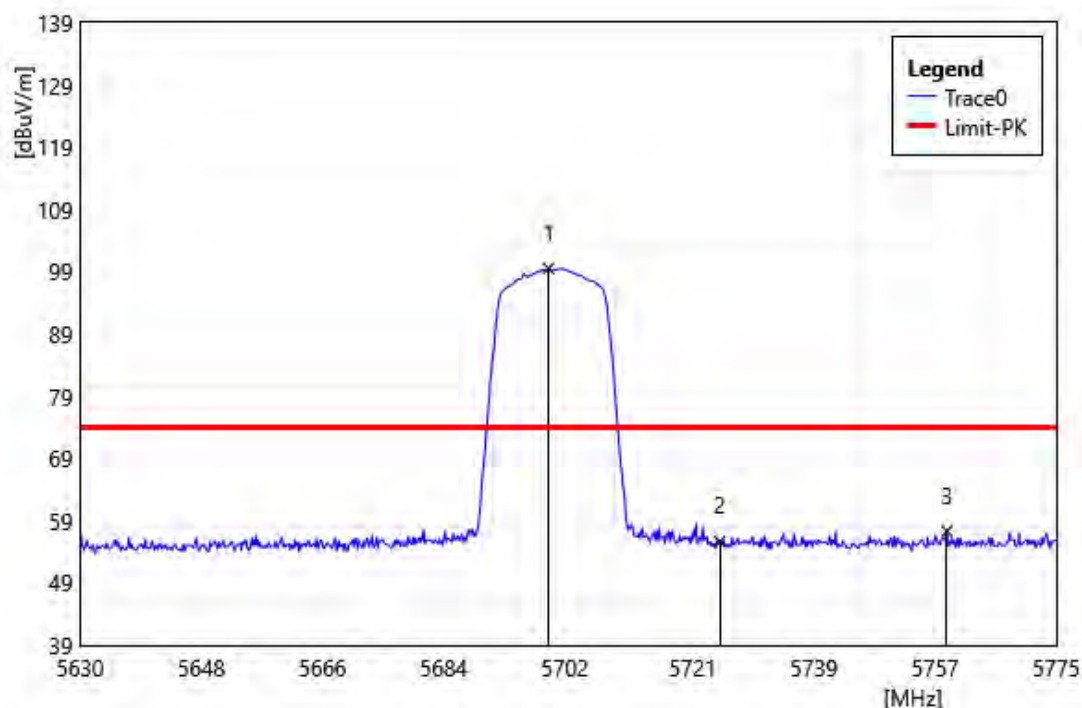


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5699.60          | 97.02           | 2.52                      | 99.54            | 74.00           | 25.54        | PEAK   |
| 2  | 5725.00          | 53.02           | 2.69                      | 55.71            | 74.00           | -18.29       | PEAK   |
| 3  | 5758.76          | 54.44           | 2.90                      | 57.35            | 74.00           | -16.66       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5745 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

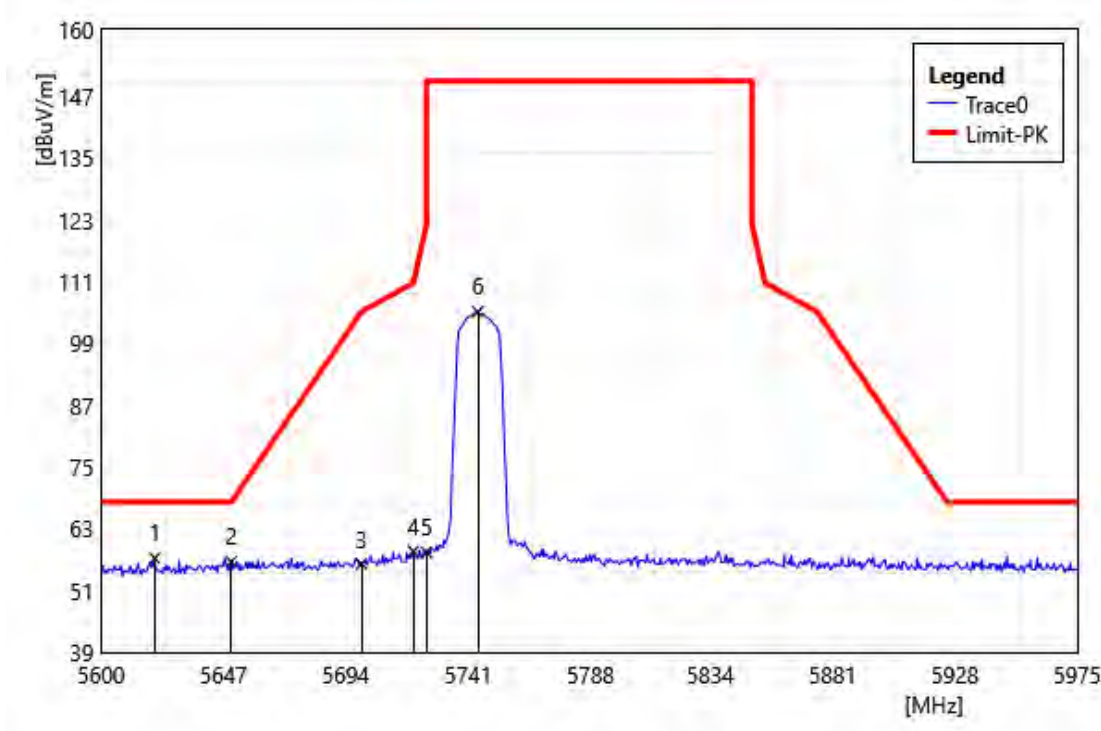


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5620.63          | 54.97           | 2.31                      | 57.28            | 68.20           | -10.92       | PEAK   |
| 2  | 5650.00          | 54.11           | 2.50                      | 56.61            | 68.20           | -11.59       | PEAK   |
| 3  | 5700.00          | 53.66           | 2.52                      | 56.18            | 105.20          | -49.02       | PEAK   |
| 4  | 5720.00          | 55.99           | 2.65                      | 58.64            | 110.80          | -52.16       | PEAK   |
| 5  | 5725.00          | 55.72           | 2.69                      | 58.41            | 150.00          | -91.59       | PEAK   |
| 6  | 5744.75          | 102.35          | 2.82                      | 105.17           | 150.00          | -44.83       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5745 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

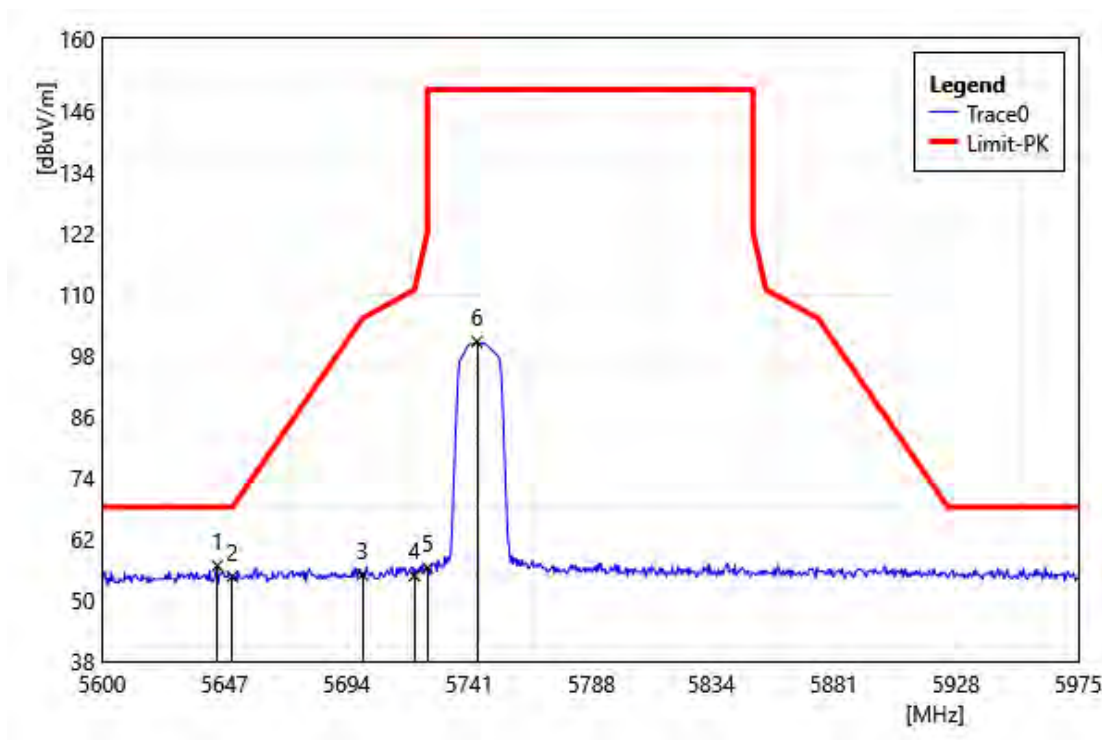


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5644.25          | 54.26           | 2.47                      | 56.73            | 68.20           | -11.47       | PEAK   |
| 2  | 5650.00          | 52.11           | 2.50                      | 54.61            | 68.20           | -13.59       | PEAK   |
| 3  | 5700.00          | 52.45           | 2.52                      | 54.97            | 105.20          | -50.23       | PEAK   |
| 4  | 5720.00          | 52.10           | 2.65                      | 54.75            | 110.80          | -56.05       | PEAK   |
| 5  | 5725.00          | 53.58           | 2.69                      | 56.27            | 150.00          | -93.73       | PEAK   |
| 6  | 5744.00          | 97.85           | 2.81                      | 100.66           | 150.00          | -49.34       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5825 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

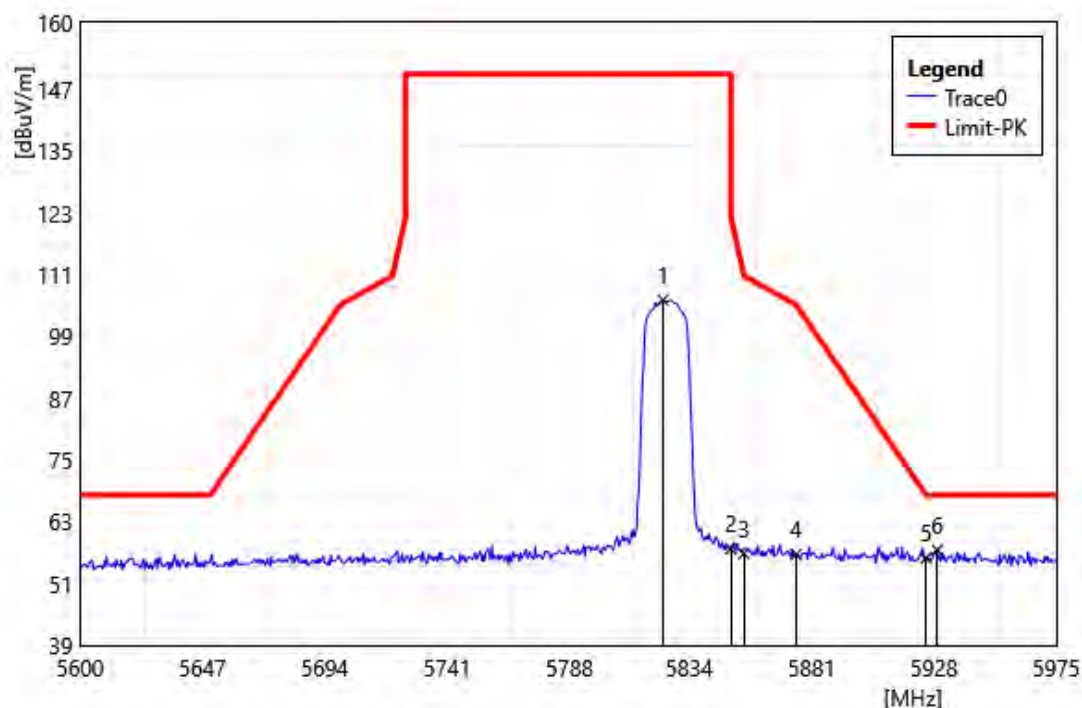


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5823.88          | 102.97          | 3.16                      | 106.13           | 150.00          | -43.87       | PEAK   |
| 2  | 5850.00          | 54.57           | 3.23                      | 57.80            | 122.20          | -64.40       | PEAK   |
| 3  | 5855.00          | 53.57           | 3.25                      | 56.82            | 110.80          | -53.98       | PEAK   |
| 4  | 5875.00          | 53.29           | 3.35                      | 56.64            | 105.20          | -48.56       | PEAK   |
| 5  | 5925.00          | 52.67           | 3.25                      | 55.92            | 68.20           | -12.28       | PEAK   |
| 6  | 5929.25          | 54.31           | 3.22                      | 57.53            | 68.20           | -10.67       | PEAK   |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5825 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

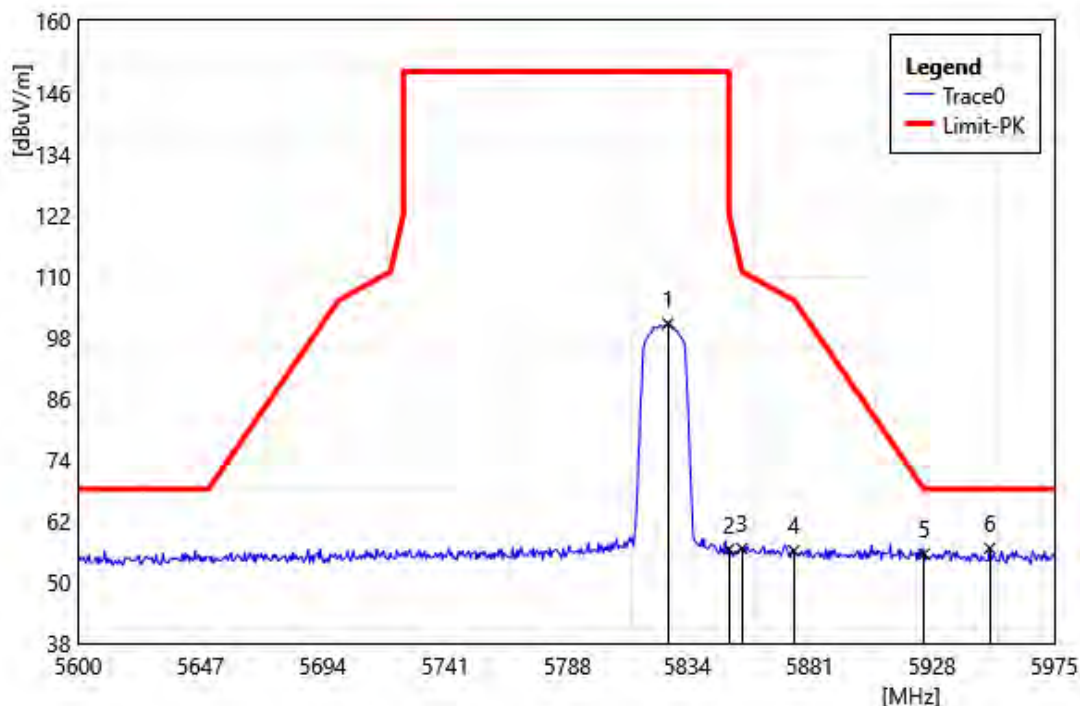


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5826.50          | 97.50           | 3.16                      | 100.66           | 150.00          | -49.34       | PEAK   |
| 2  | 5850.00          | 53.21           | 3.23                      | 56.44            | 122.20          | -65.76       | PEAK   |
| 3  | 5855.00          | 53.32           | 3.25                      | 56.57            | 110.80          | -54.23       | PEAK   |
| 4  | 5875.00          | 52.82           | 3.35                      | 56.17            | 105.20          | -49.03       | PEAK   |
| 5  | 5925.00          | 52.26           | 3.25                      | 55.51            | 68.20           | -12.69       | PEAK   |
| 6  | 5950.25          | 53.60           | 3.03                      | 56.63            | 68.20           | -11.57       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

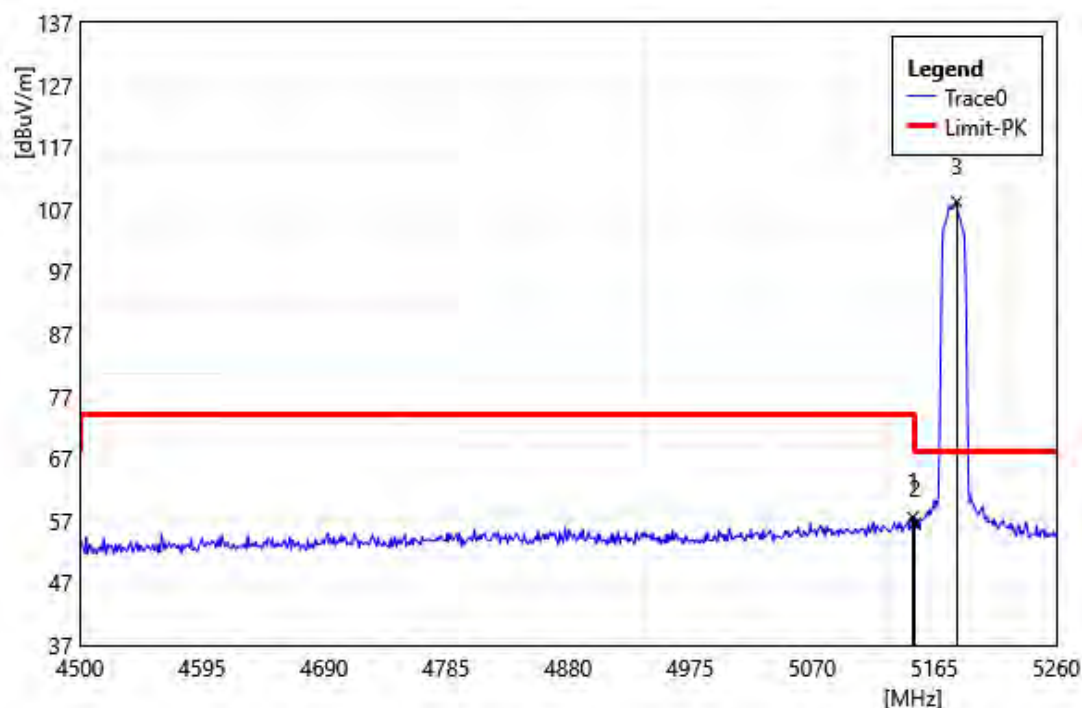


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5148.28          | 56.01           | 1.56                      | 57.57            | 74.00           | -16.43       | PEAK   |
| 2  | 5150.00          | 54.97           | 1.56                      | 56.53            | 74.00           | -17.47       | PEAK   |
| 3  | 5182.48          | 106.70          | 1.57                      | 108.27           | 68.20           | 40.07        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

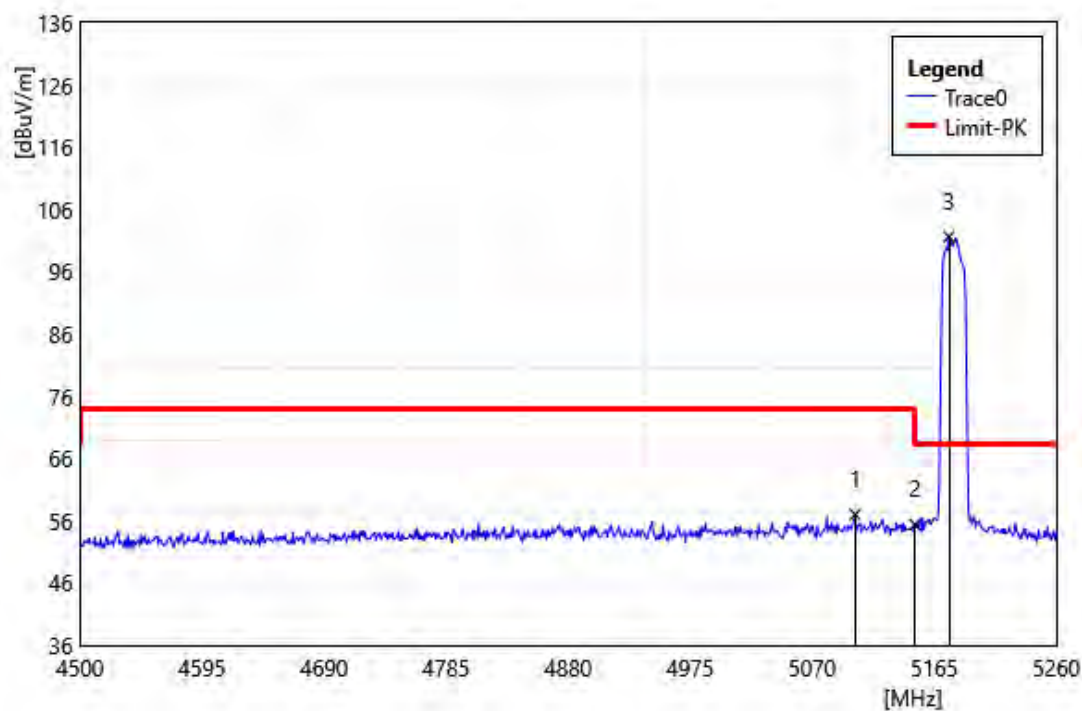


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5103.44          | 55.31           | 1.71                      | 57.02            | 74.00           | -16.98       | PEAK   |
| 2  | 5150.00          | 53.82           | 1.56                      | 55.38            | 74.00           | -18.62       | PEAK   |
| 3  | 5176.40          | 100.08          | 1.56                      | 101.64           | 68.20           | 33.44        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

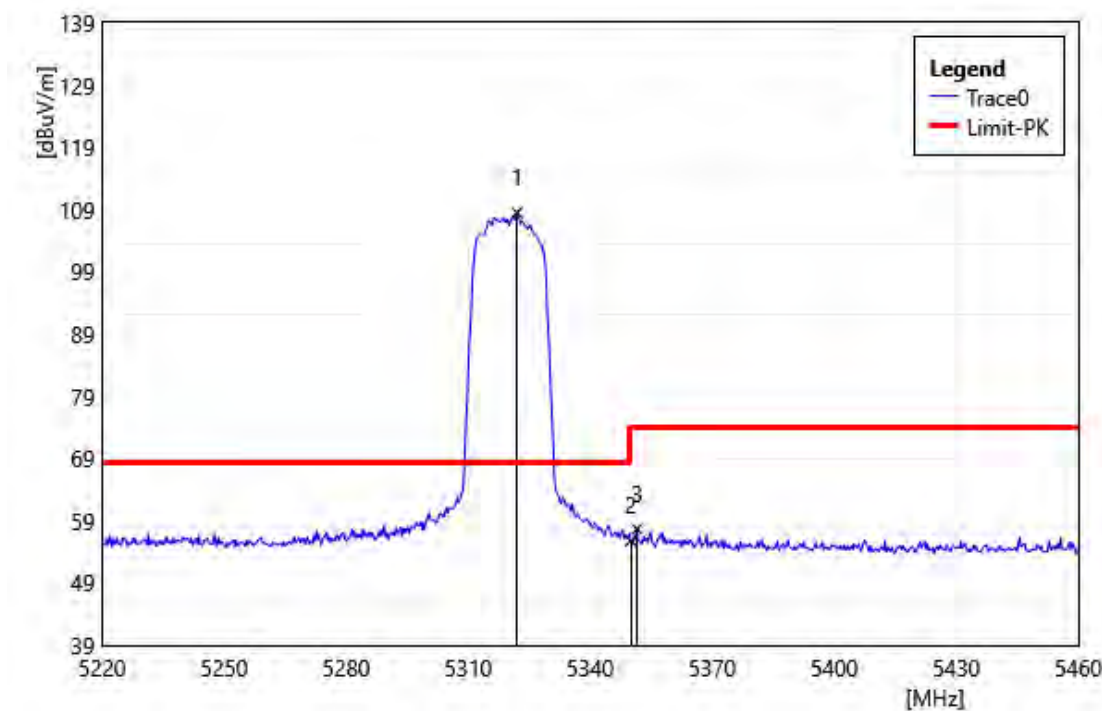


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5322.00          | 107.22          | 1.28                      | 108.50           | 68.20           | 40.30        | PEAK   |
| 2  | 5350.00          | 54.66           | 1.16                      | 55.82            | 74.00           | -18.18       | PEAK   |
| 3  | 5351.52          | 56.50           | 1.17                      | 57.67            | 74.00           | -16.33       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

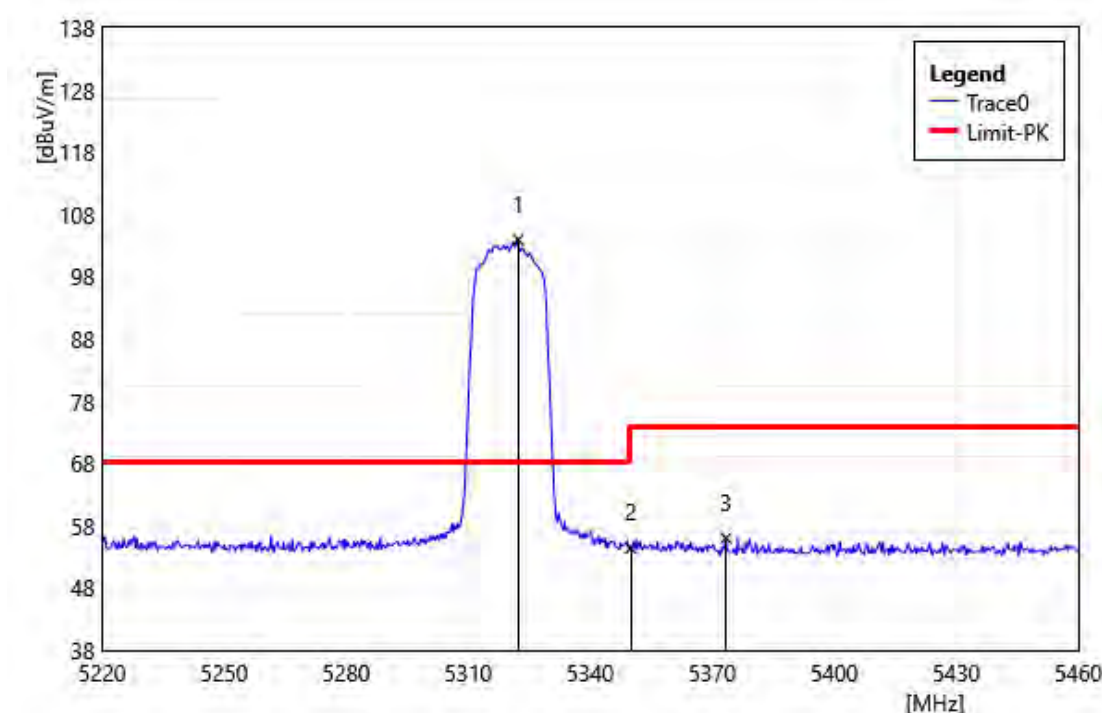


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5322.24          | 102.64          | 1.28                      | 103.92           | 68.20           | 35.72        | PEAK   |
| 2  | 5350.00          | 53.23           | 1.16                      | 54.39            | 74.00           | -19.61       | PEAK   |
| 3  | 5373.36          | 54.75           | 1.29                      | 56.04            | 74.00           | -17.96       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

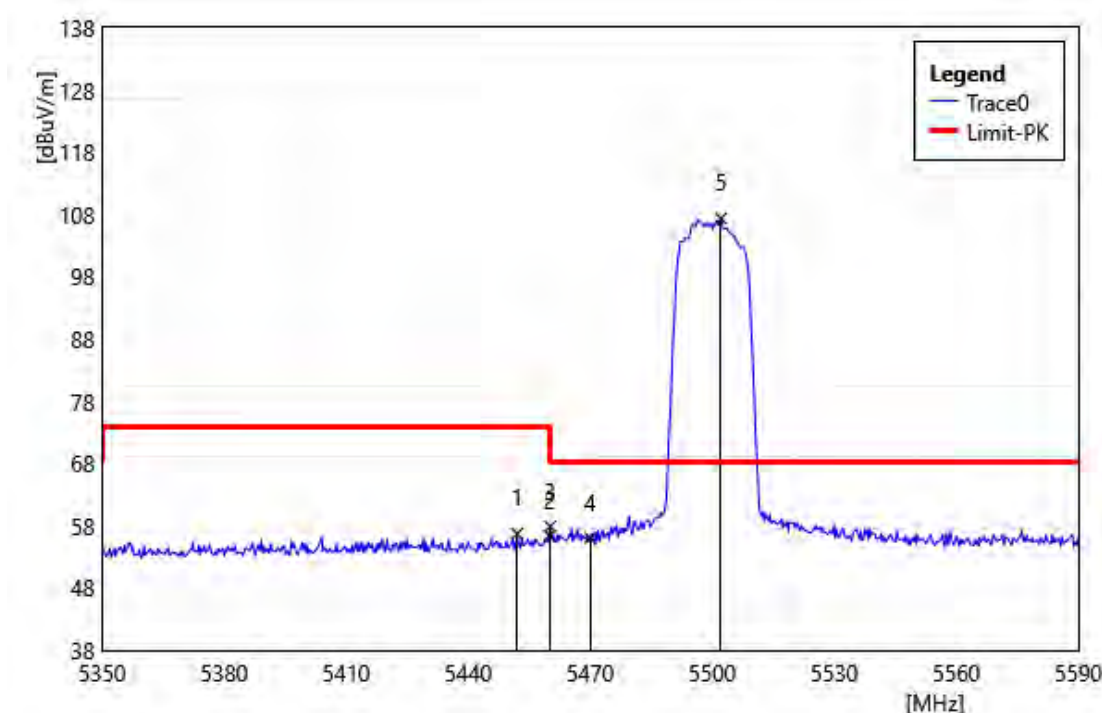


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5452.00          | 55.06           | 1.66                      | 56.72            | 74.00           | -17.28       | PEAK   |
| 2  | 5460.00          | 54.72           | 1.69                      | 56.41            | 74.00           | -17.59       | PEAK   |
| 3  | 5460.16          | 56.21           | 1.69                      | 57.90            | 68.20           | -10.30       | PEAK   |
| 4  | 5470.00          | 54.32           | 1.72                      | 56.04            | 68.20           | -12.16       | PEAK   |
| 5  | 5502.16          | 105.53          | 1.84                      | 107.37           | 68.20           | 39.17        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

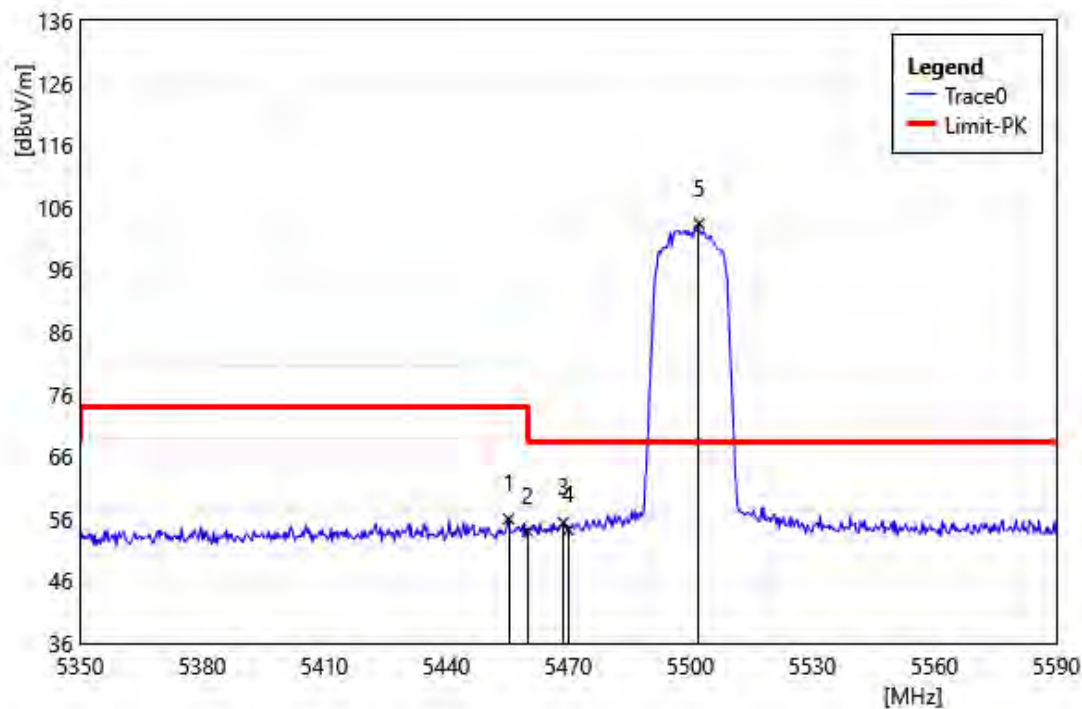


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5455.36          | 54.31           | 1.67                      | 55.98            | 74.00           | -18.02       | PEAK   |
| 2  | 5460.00          | 52.30           | 1.69                      | 53.99            | 74.00           | -20.01       | PEAK   |
| 3  | 5468.80          | 53.64           | 1.72                      | 55.37            | 68.20           | -12.84       | PEAK   |
| 4  | 5470.00          | 52.51           | 1.72                      | 54.23            | 68.20           | -13.97       | PEAK   |
| 5  | 5502.16          | 101.56          | 1.84                      | 103.40           | 68.20           | 35.20        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5700 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

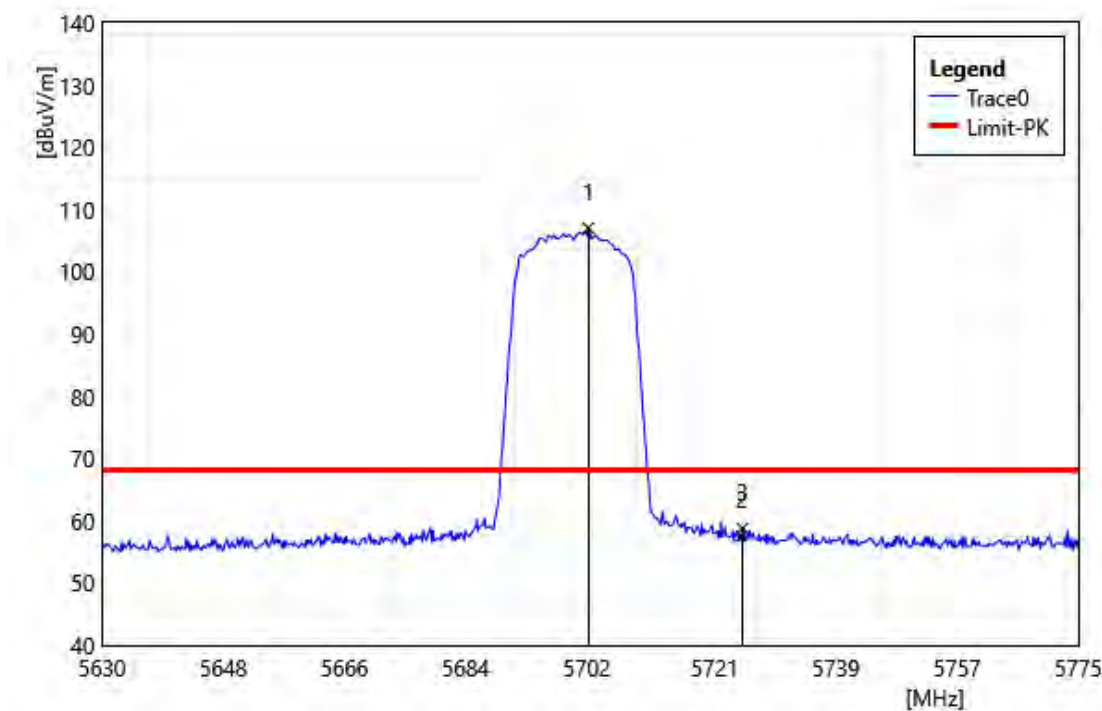


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5702.21          | 104.45          | 2.53                      | 106.98           | 68.20           | 38.78        | PEAK   |
| 2  | 5725.00          | 54.85           | 2.69                      | 57.54            | 68.20           | -10.66       | PEAK   |
| 3  | 5725.12          | 56.09           | 2.69                      | 58.78            | 68.20           | -9.42        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5700 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

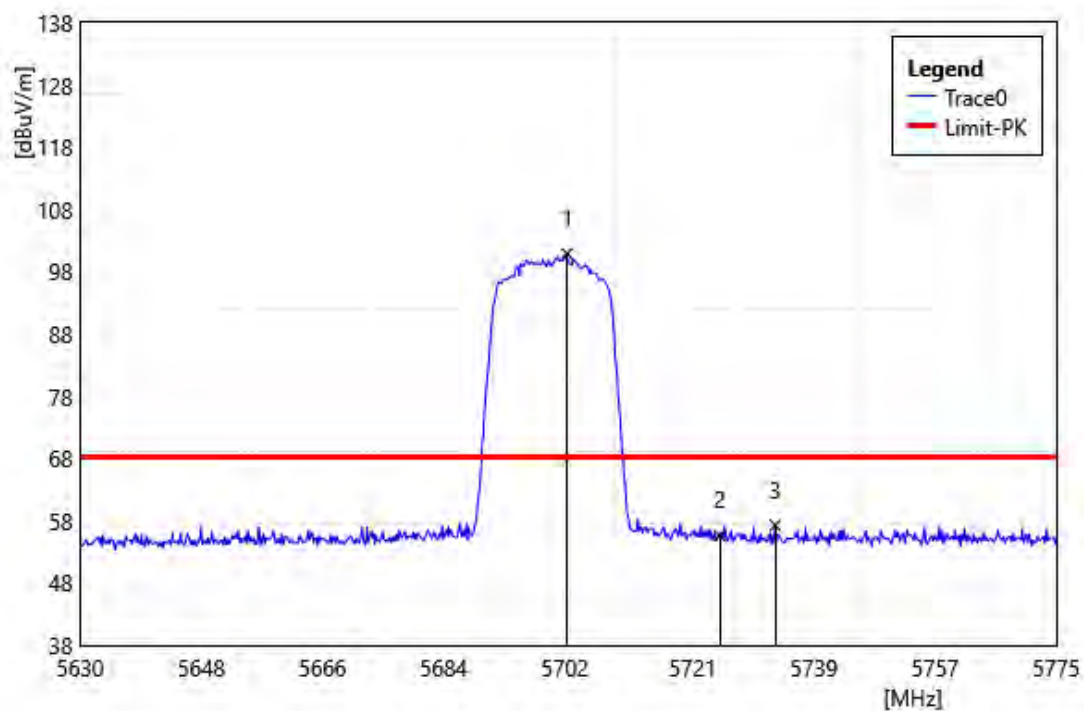


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5702.36          | 98.36           | 2.53                      | 100.89           | 68.20           | 32.69        | PEAK   |
| 2  | 5725.00          | 52.92           | 2.69                      | 55.61            | 68.20           | -12.59       | PEAK   |
| 3  | 5733.24          | 54.53           | 2.74                      | 57.27            | 68.20           | -10.93       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5745 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

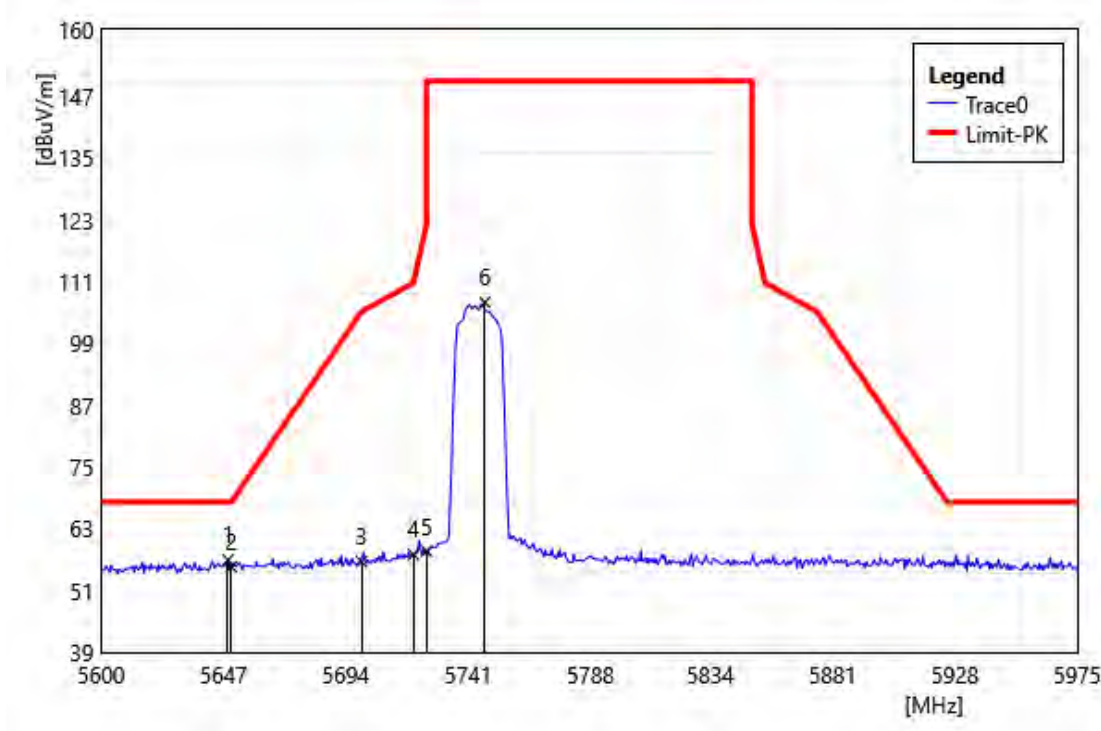


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5648.75          | 54.46           | 2.49                      | 56.95            | 68.20           | -11.25       | PEAK   |
| 2  | 5650.00          | 53.12           | 2.50                      | 55.62            | 68.20           | -12.58       | PEAK   |
| 3  | 5700.00          | 54.09           | 2.52                      | 56.61            | 105.20          | -48.59       | PEAK   |
| 4  | 5720.00          | 55.35           | 2.65                      | 58.00            | 110.80          | -52.80       | PEAK   |
| 5  | 5725.00          | 55.99           | 2.69                      | 58.68            | 150.00          | -91.32       | PEAK   |
| 6  | 5747.38          | 104.18          | 2.83                      | 107.01           | 150.00          | -42.99       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5745 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

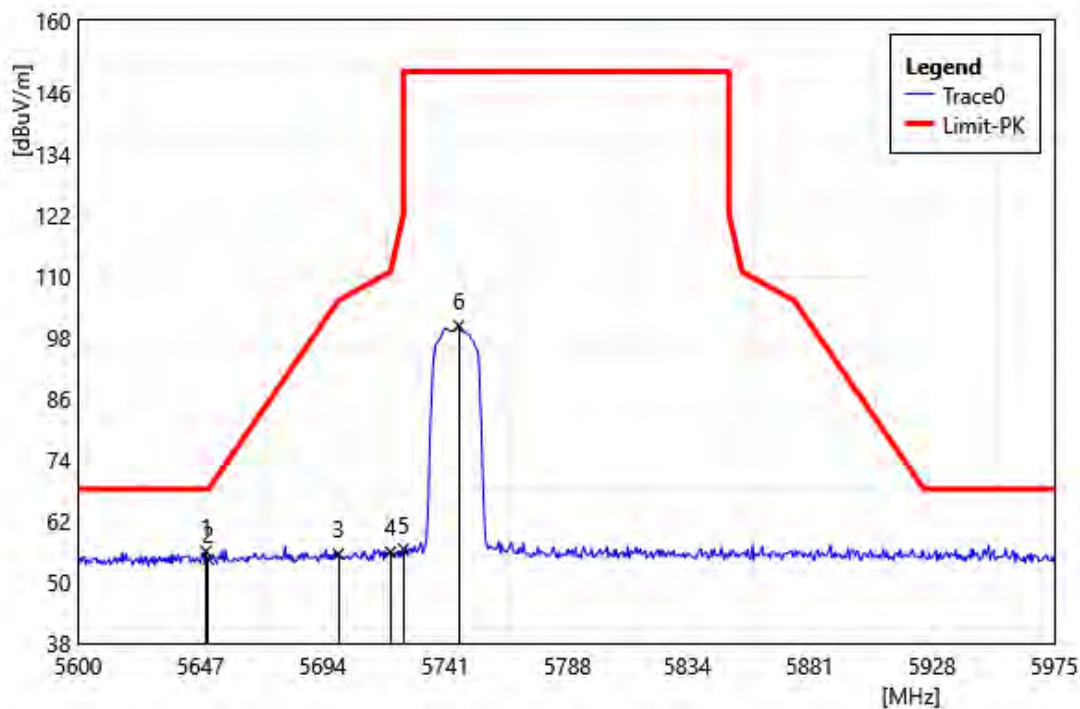


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5649.13          | 53.54           | 2.49                      | 56.03            | 68.20           | -12.17       | PEAK   |
| 2  | 5650.00          | 51.97           | 2.50                      | 54.47            | 68.20           | -13.73       | PEAK   |
| 3  | 5700.00          | 52.99           | 2.52                      | 55.51            | 105.20          | -49.69       | PEAK   |
| 4  | 5720.00          | 53.22           | 2.65                      | 55.87            | 110.80          | -54.93       | PEAK   |
| 5  | 5725.00          | 53.78           | 2.69                      | 56.48            | 150.00          | -93.53       | PEAK   |
| 6  | 5746.25          | 97.39           | 2.83                      | 100.22           | 150.00          | -49.78       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5825 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

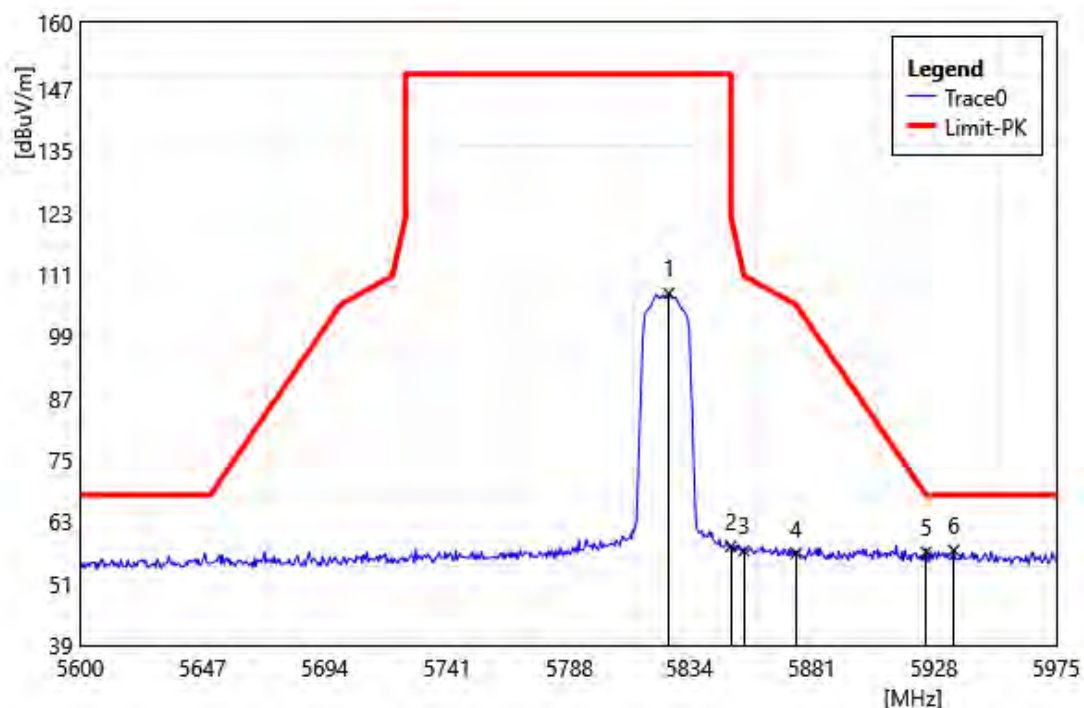


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5826.13          | 104.26          | 3.16                      | 107.42           | 150.00          | -42.58       | PEAK   |
| 2  | 5850.00          | 55.02           | 3.23                      | 58.25            | 122.20          | -63.95       | PEAK   |
| 3  | 5855.00          | 54.07           | 3.25                      | 57.32            | 110.80          | -53.48       | PEAK   |
| 4  | 5875.00          | 53.51           | 3.35                      | 56.86            | 105.20          | -48.34       | PEAK   |
| 5  | 5925.00          | 53.88           | 3.25                      | 57.13            | 68.20           | -11.08       | PEAK   |
| 6  | 5935.63          | 54.31           | 3.15                      | 57.46            | 68.20           | -10.74       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5825 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

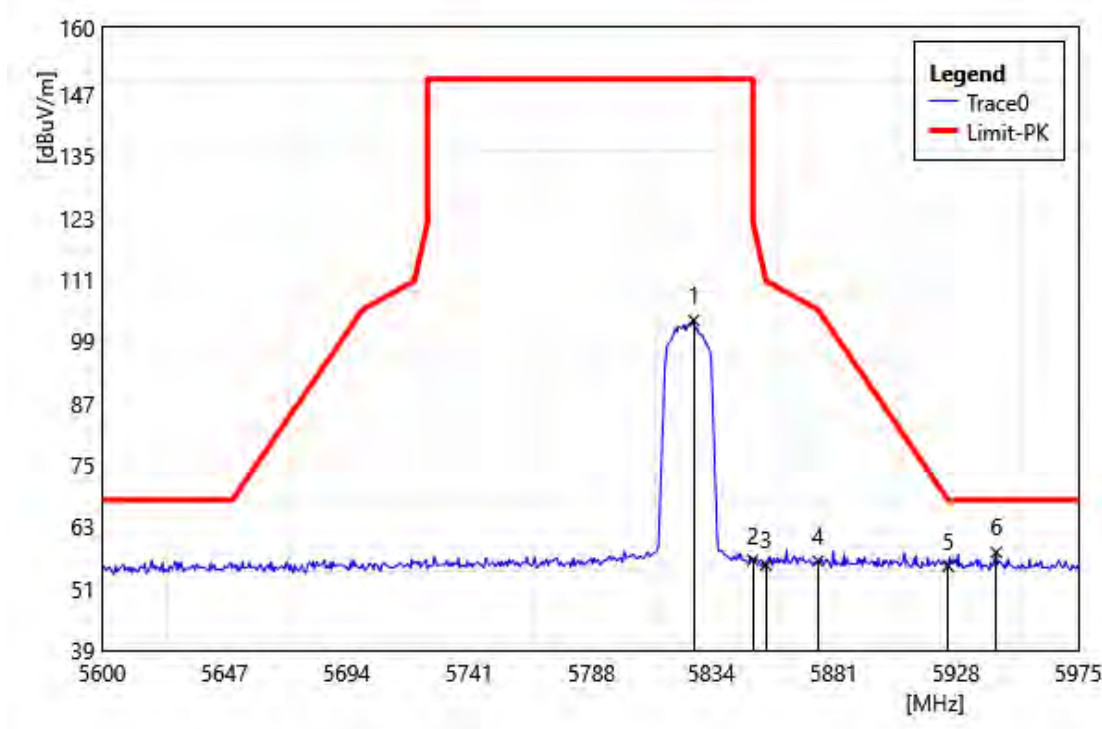


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5827.25          | 99.98           | 3.16                      | 103.14           | 150.00          | -46.86       | PEAK   |
| 2  | 5850.00          | 53.31           | 3.23                      | 56.54            | 122.20          | -65.66       | PEAK   |
| 3  | 5855.00          | 52.34           | 3.25                      | 55.59            | 110.80          | -55.21       | PEAK   |
| 4  | 5875.00          | 53.01           | 3.35                      | 56.36            | 105.20          | -48.84       | PEAK   |
| 5  | 5925.00          | 52.11           | 3.25                      | 55.36            | 68.20           | -12.84       | PEAK   |
| 6  | 5943.50          | 54.95           | 3.08                      | 58.03            | 68.20           | -10.17       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

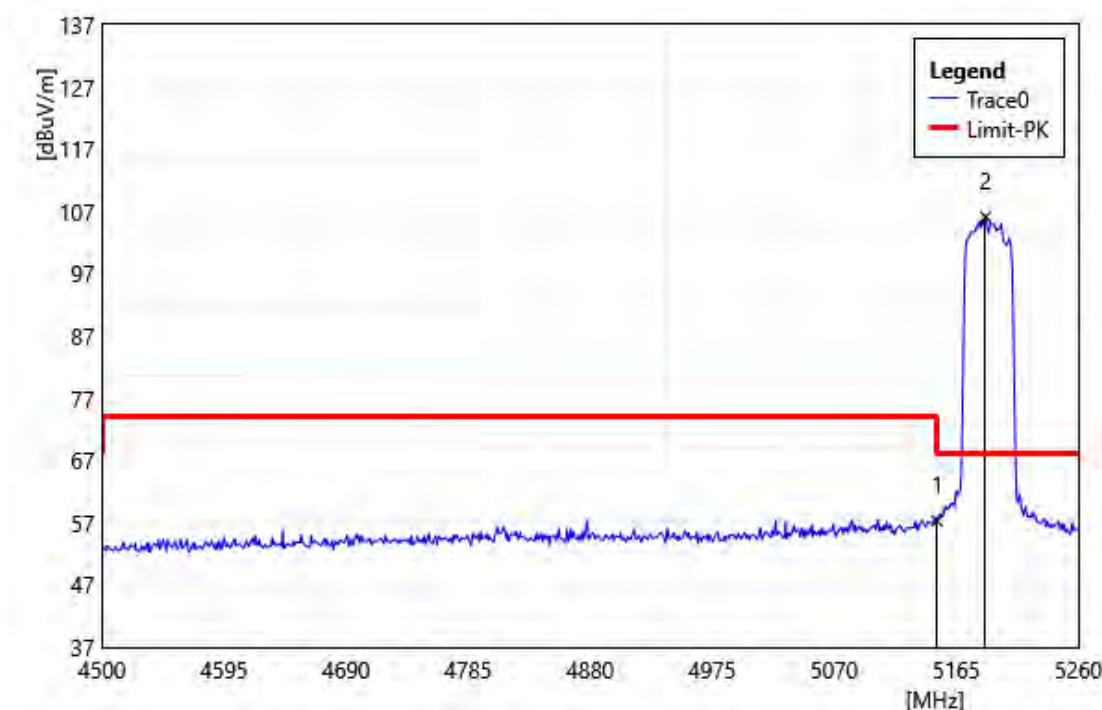


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5150.00          | 55.75           | 1.56                      | 57.31            | 74.00           | -16.69       | PEAK   |
| 2  | 5187.80          | 104.56          | 1.57                      | 106.14           | 68.20           | 37.94        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

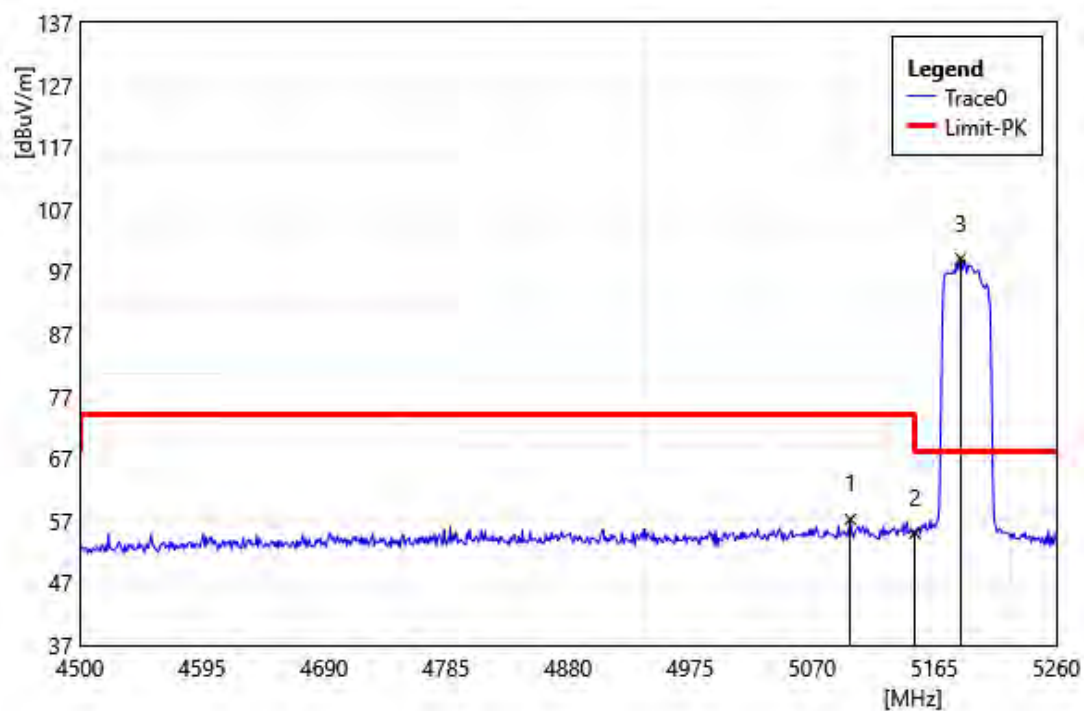


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5099.64          | 55.51           | 1.72                      | 57.23            | 74.00           | -16.77       | PEAK   |
| 2  | 5150.00          | 53.46           | 1.56                      | 55.02            | 74.00           | -18.98       | PEAK   |
| 3  | 5185.52          | 97.53           | 1.57                      | 99.10            | 68.20           | 30.90        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

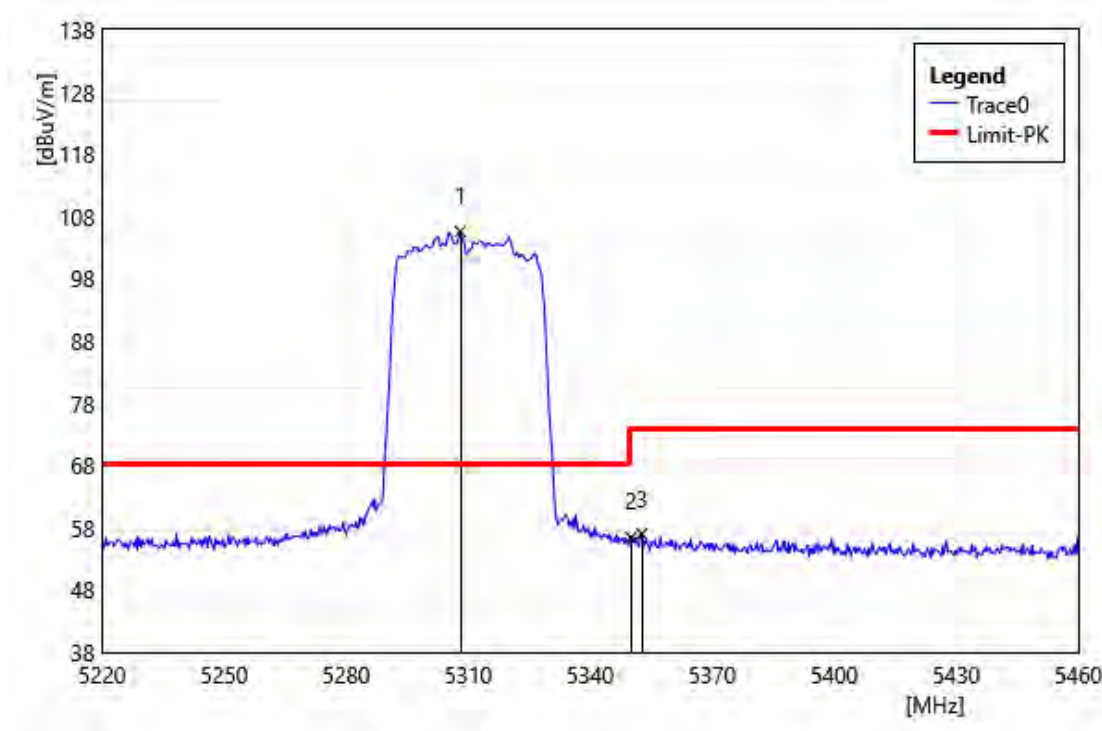


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5308.08          | 104.26          | 1.34                      | 105.60           | 68.20           | 37.40        | PEAK   |
| 2  | 5350.00          | 55.27           | 1.16                      | 56.43            | 74.00           | -17.57       | PEAK   |
| 3  | 5352.72          | 55.84           | 1.17                      | 57.01            | 74.00           | -16.99       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

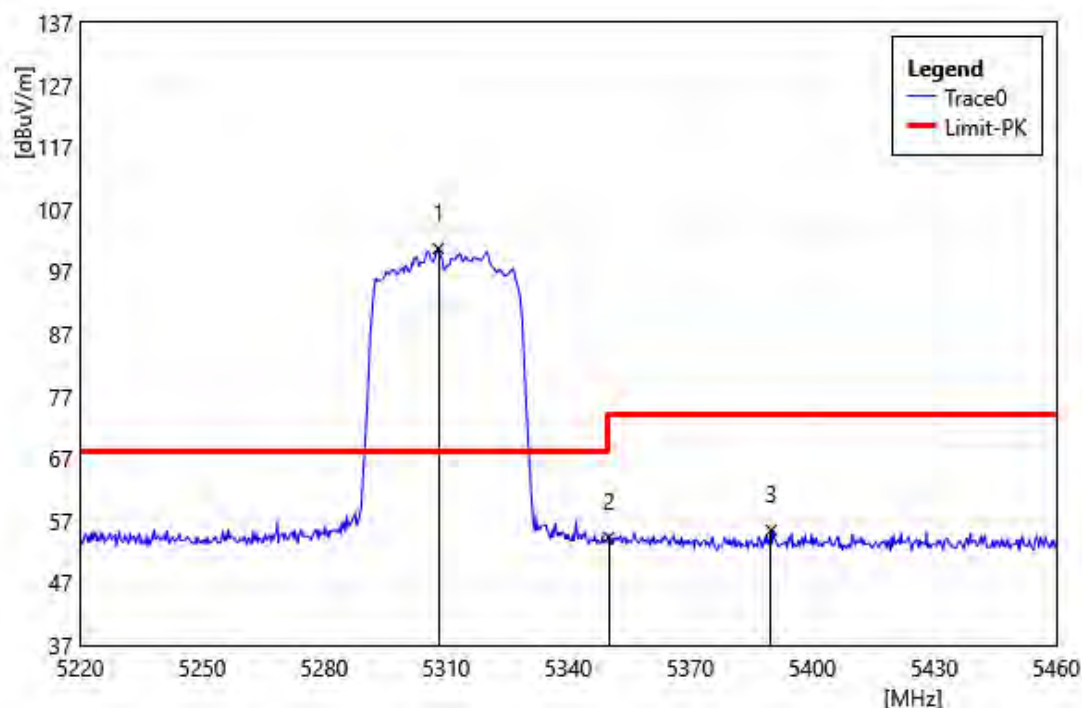


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5308.08          | 99.36           | 1.34                      | 100.70           | 68.20           | 32.50        | PEAK   |
| 2  | 5350.00          | 53.19           | 1.16                      | 54.35            | 74.00           | -19.65       | PEAK   |
| 3  | 5389.92          | 54.10           | 1.39                      | 55.49            | 74.00           | -18.51       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

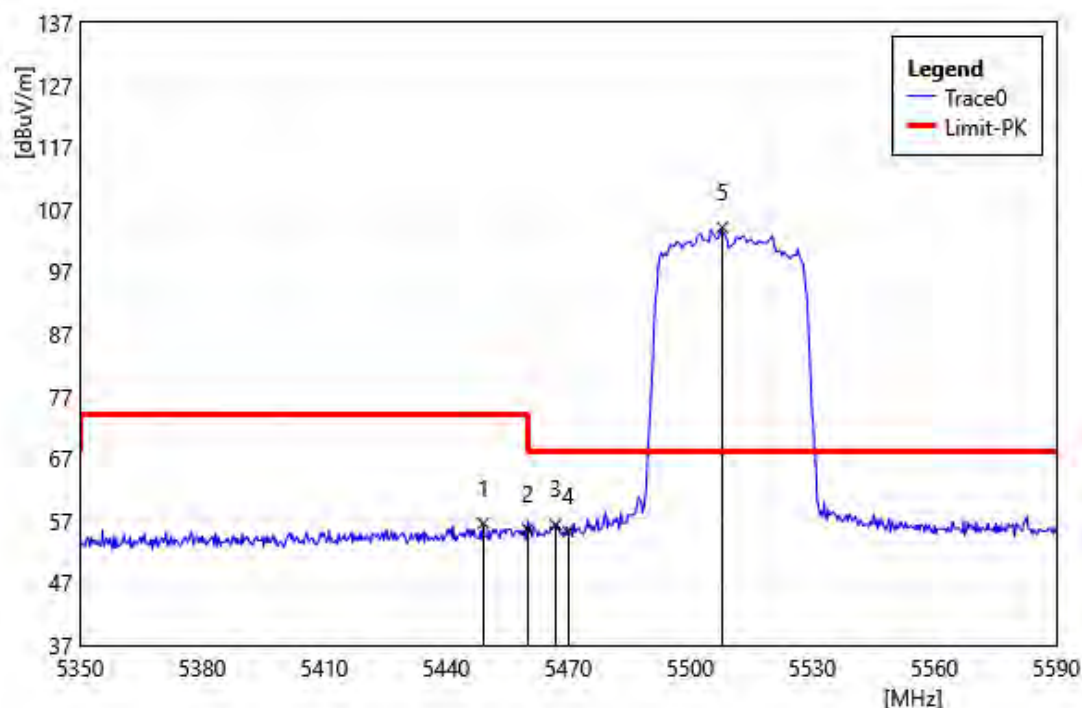


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5449.12          | 54.96           | 1.64                      | 56.60            | 74.00           | -17.40       | PEAK   |
| 2  | 5460.00          | 53.93           | 1.69                      | 55.62            | 74.00           | -18.38       | PEAK   |
| 3  | 5466.88          | 54.60           | 1.72                      | 56.33            | 68.20           | -11.88       | PEAK   |
| 4  | 5470.00          | 53.56           | 1.72                      | 55.28            | 68.20           | -12.92       | PEAK   |
| 5  | 5507.92          | 102.29          | 1.85                      | 104.14           | 68.20           | 35.94        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

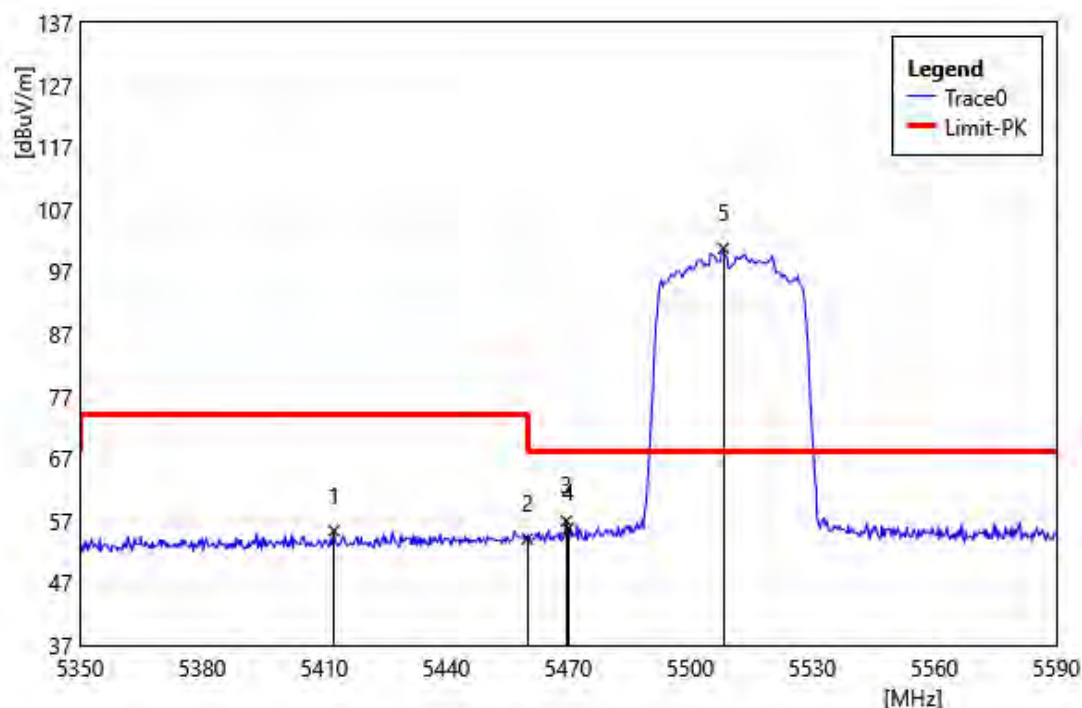


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5412.40          | 53.91           | 1.49                      | 55.40            | 74.00           | -18.60       | PEAK   |
| 2  | 5460.00          | 52.42           | 1.69                      | 54.11            | 74.00           | -19.89       | PEAK   |
| 3  | 5469.52          | 55.24           | 1.72                      | 56.96            | 68.20           | -11.24       | PEAK   |
| 4  | 5470.00          | 54.01           | 1.72                      | 55.73            | 68.20           | -12.47       | PEAK   |
| 5  | 5508.16          | 98.92           | 1.85                      | 100.77           | 68.20           | 32.57        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5670 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

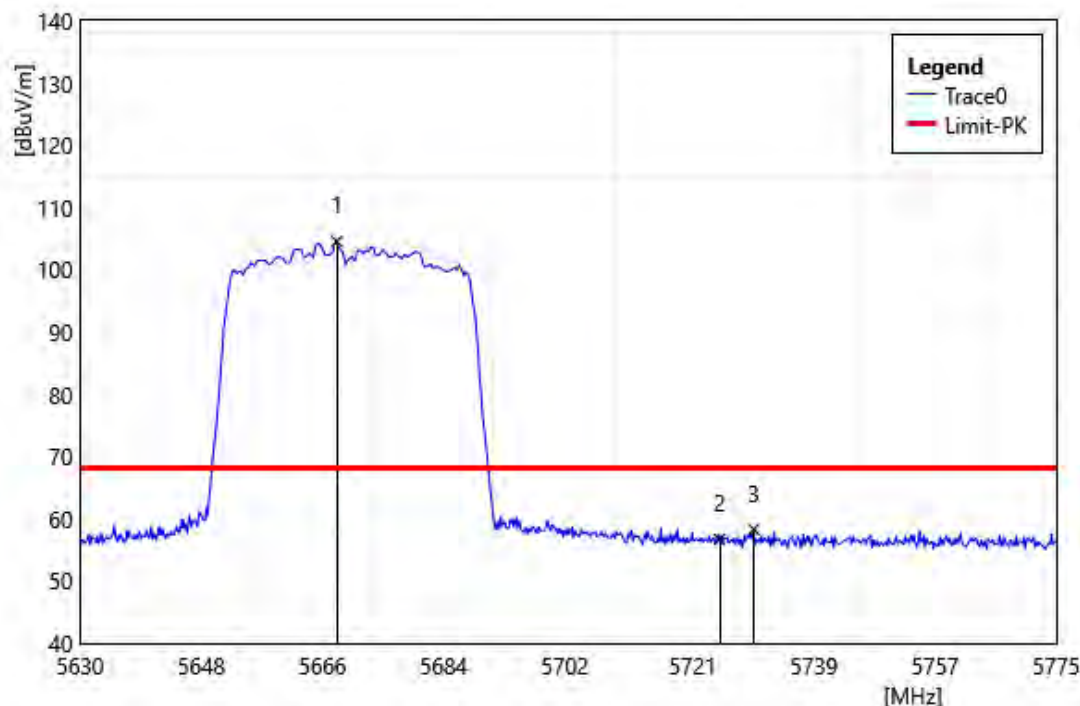


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5668.14          | 102.06          | 2.51                      | 104.57           | 68.20           | 36.37        | PEAK   |
| 2  | 5725.00          | 54.02           | 2.69                      | 56.71            | 68.20           | -11.49       | PEAK   |
| 3  | 5730.05          | 55.58           | 2.72                      | 58.30            | 68.20           | -9.90        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5670 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

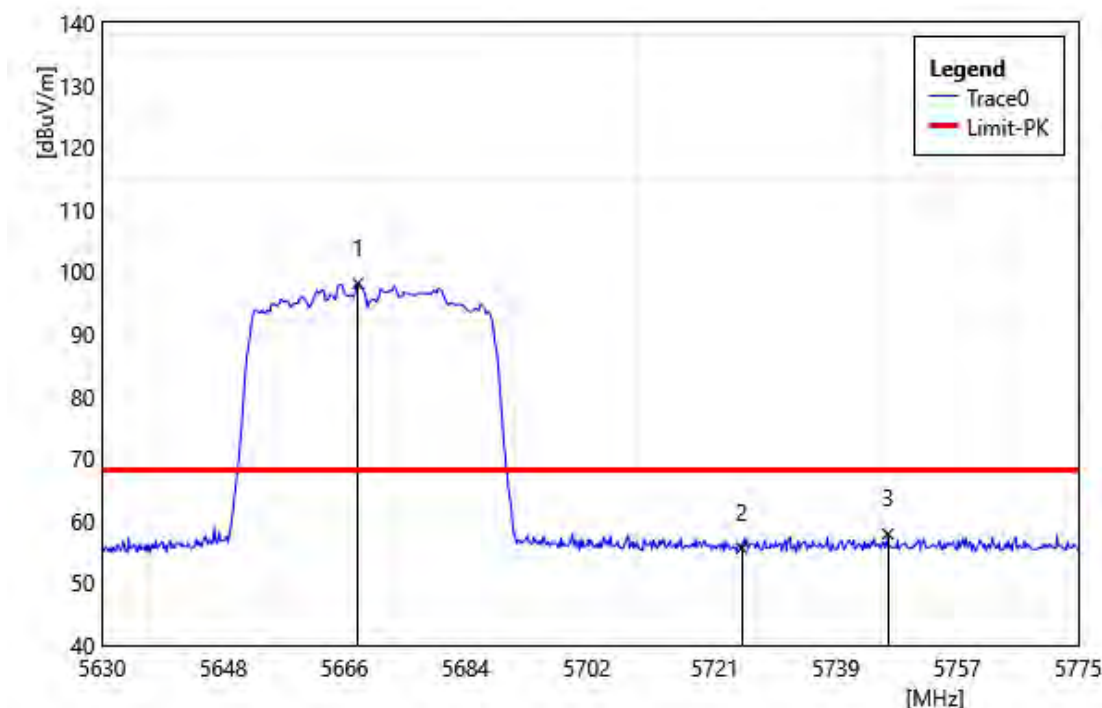


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5667.99          | 95.63           | 2.51                      | 98.14            | 68.20           | 29.94        | PEAK   |
| 2  | 5725.00          | 52.93           | 2.69                      | 55.62            | 68.20           | -12.58       | PEAK   |
| 3  | 5746.73          | 55.05           | 2.83                      | 57.88            | 68.20           | -10.32       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5755 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

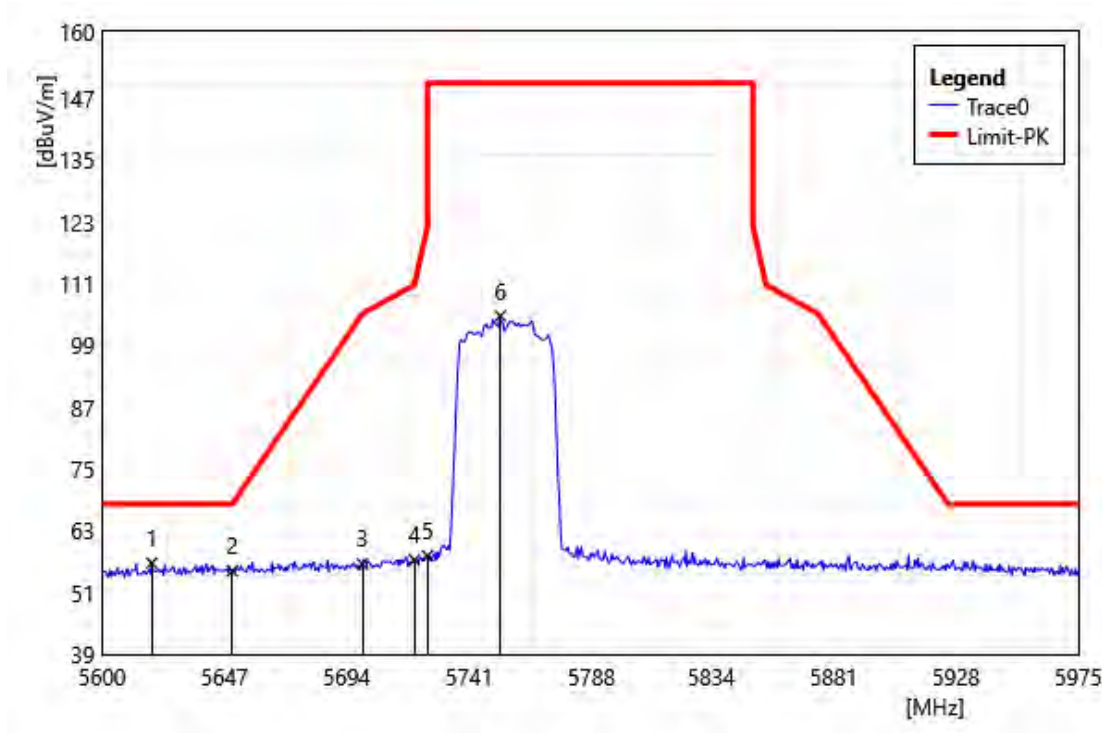


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5619.13          | 54.43           | 2.30                      | 56.73            | 68.20           | -11.47       | PEAK   |
| 2  | 5650.00          | 52.72           | 2.50                      | 55.22            | 68.20           | -12.98       | PEAK   |
| 3  | 5700.00          | 54.05           | 2.52                      | 56.57            | 105.20          | -48.63       | PEAK   |
| 4  | 5720.00          | 54.66           | 2.65                      | 57.31            | 110.80          | -53.49       | PEAK   |
| 5  | 5725.00          | 55.44           | 2.69                      | 58.13            | 150.00          | -91.87       | PEAK   |
| 6  | 5753.00          | 101.91          | 2.87                      | 104.78           | 150.00          | -45.22       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5755 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

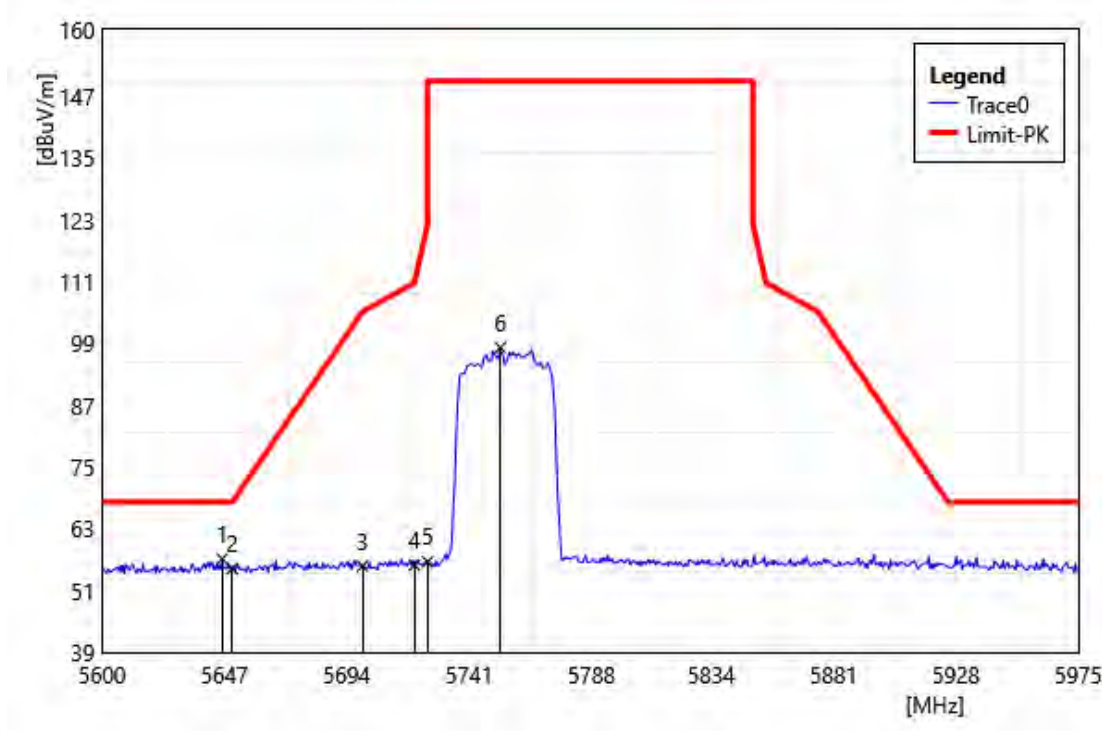


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5646.13          | 54.67           | 2.48                      | 57.15            | 68.20           | -11.05       | PEAK   |
| 2  | 5650.00          | 52.77           | 2.50                      | 55.27            | 68.20           | -12.93       | PEAK   |
| 3  | 5700.00          | 53.21           | 2.52                      | 55.73            | 105.20          | -49.47       | PEAK   |
| 4  | 5720.00          | 53.26           | 2.65                      | 55.91            | 110.80          | -54.89       | PEAK   |
| 5  | 5725.00          | 53.91           | 2.69                      | 56.60            | 150.00          | -93.40       | PEAK   |
| 6  | 5753.00          | 95.35           | 2.87                      | 98.22            | 150.00          | -51.78       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5795 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

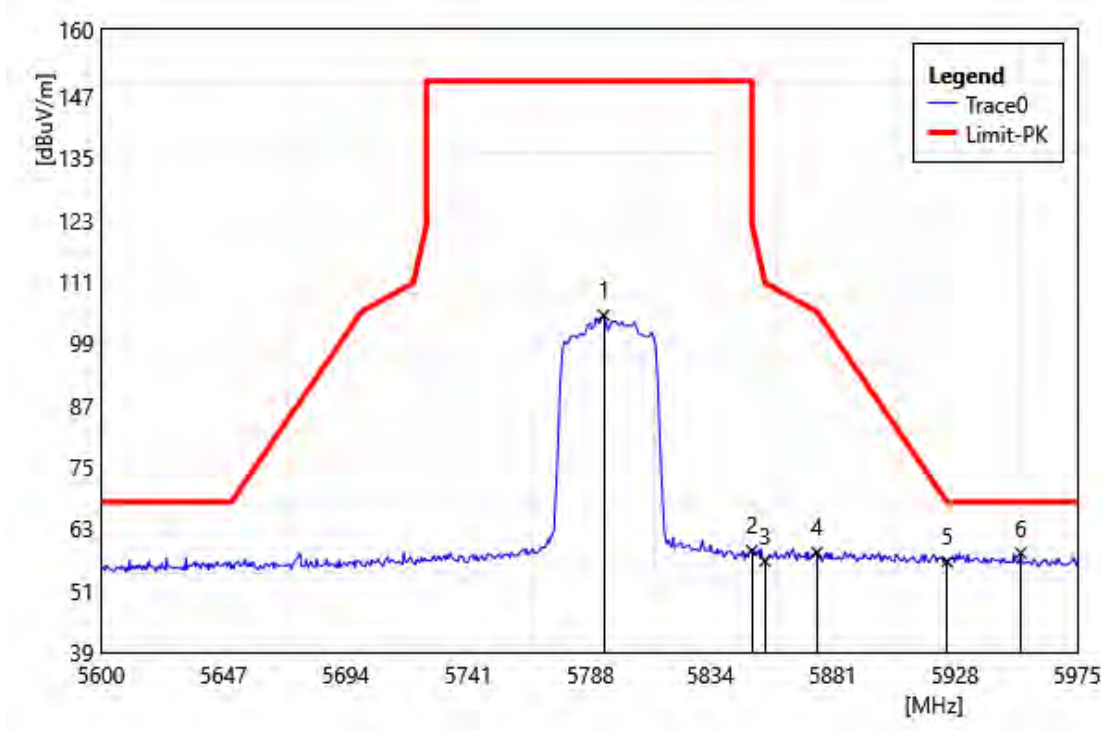


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5793.13          | 101.46          | 3.06                      | 104.52           | 150.00          | -45.48       | PEAK   |
| 2  | 5850.00          | 55.51           | 3.23                      | 58.74            | 122.20          | -63.46       | PEAK   |
| 3  | 5855.00          | 53.44           | 3.25                      | 56.69            | 110.80          | -54.11       | PEAK   |
| 4  | 5875.00          | 55.03           | 3.35                      | 58.38            | 105.20          | -46.82       | PEAK   |
| 5  | 5925.00          | 53.33           | 3.25                      | 56.58            | 68.20           | -11.62       | PEAK   |
| 6  | 5953.25          | 55.29           | 3.02                      | 58.31            | 68.20           | -9.89        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5795 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

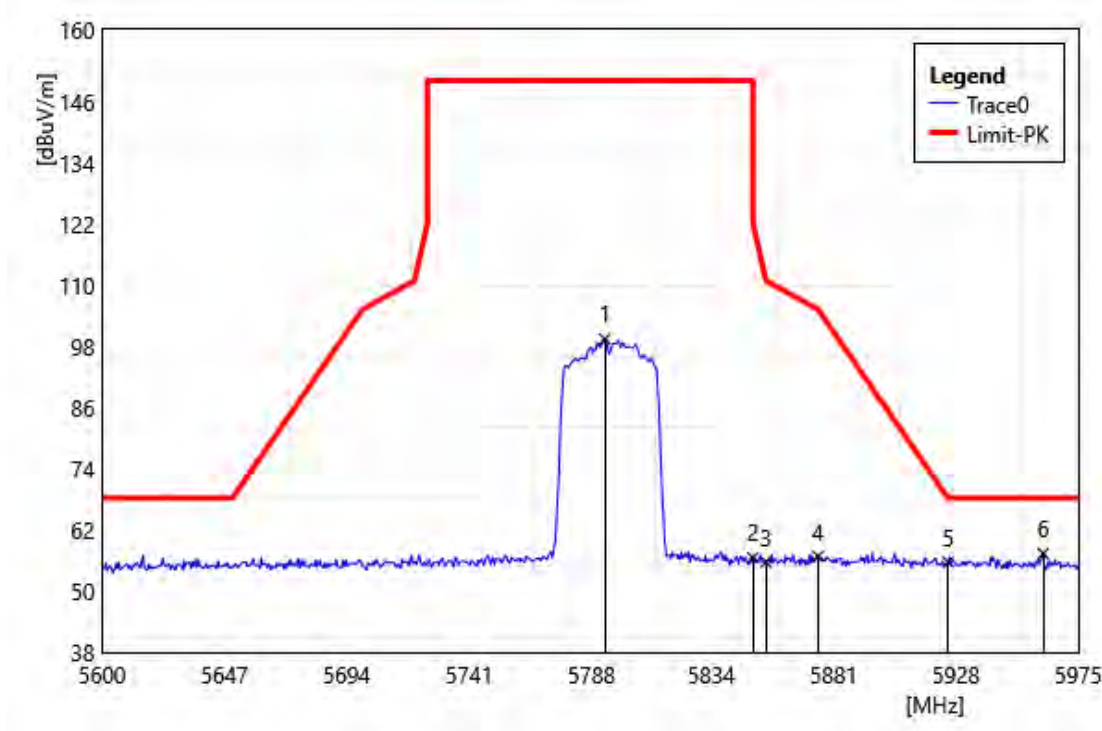


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5793.13          | 96.34           | 3.06                      | 99.40            | 150.00          | -50.60       | PEAK   |
| 2  | 5850.00          | 53.30           | 3.23                      | 56.53            | 122.20          | -65.67       | PEAK   |
| 3  | 5855.00          | 52.40           | 3.25                      | 55.65            | 110.80          | -55.15       | PEAK   |
| 4  | 5875.00          | 53.44           | 3.35                      | 56.79            | 105.20          | -48.41       | PEAK   |
| 5  | 5925.00          | 52.43           | 3.25                      | 55.68            | 68.20           | -12.52       | PEAK   |
| 6  | 5961.50          | 54.36           | 3.02                      | 57.38            | 68.20           | -10.82       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

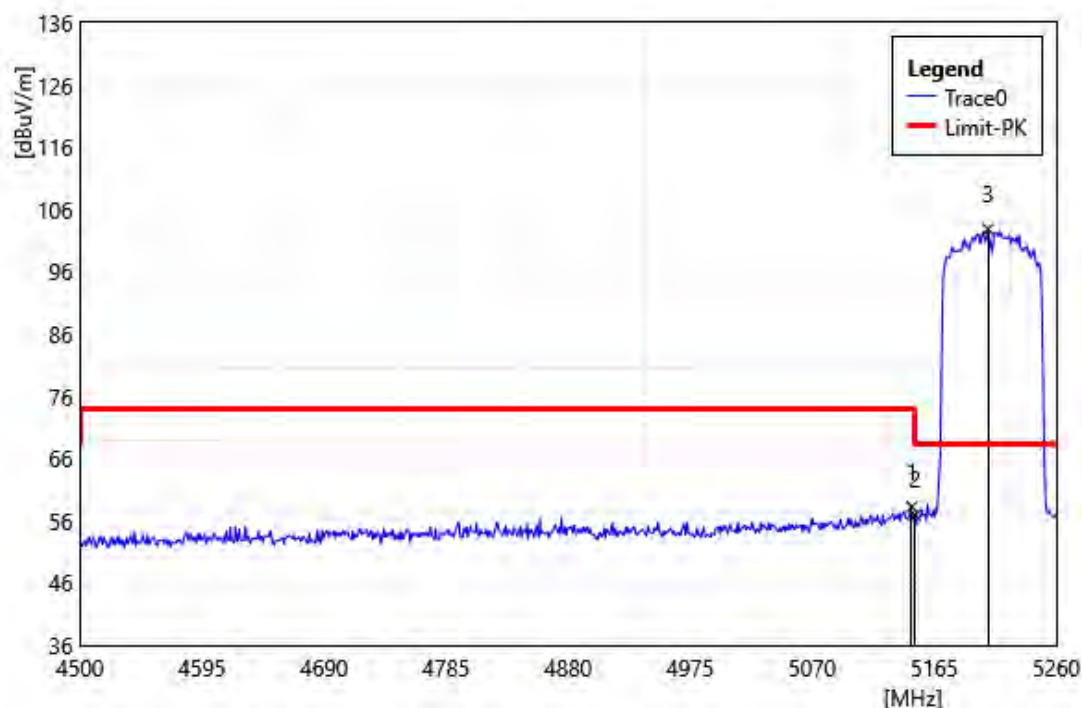


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5147.52          | 56.70           | 1.56                      | 58.26            | 74.00           | -15.75       | PEAK   |
| 2  | 5150.00          | 55.36           | 1.56                      | 56.92            | 74.00           | -17.08       | PEAK   |
| 3  | 5206.80          | 101.28          | 1.56                      | 102.84           | 68.20           | 34.64        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

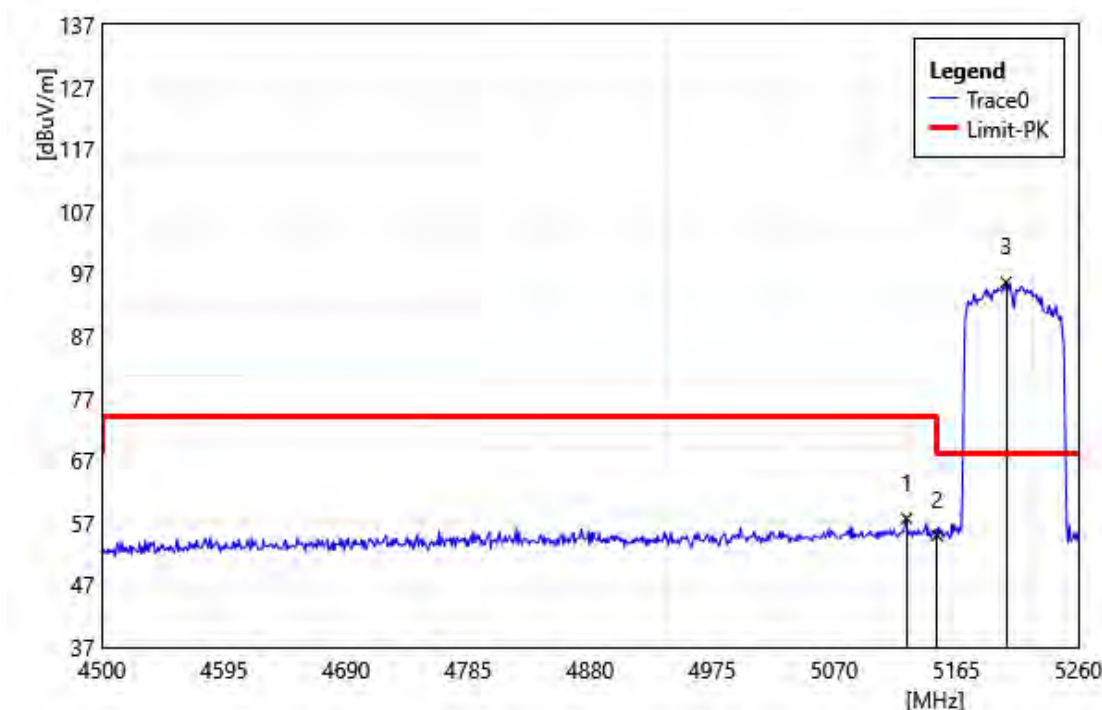


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5126.24          | 56.05           | 1.64                      | 57.69            | 74.00           | -16.31       | PEAK   |
| 2  | 5150.00          | 53.40           | 1.56                      | 54.96            | 74.00           | -19.04       | PEAK   |
| 3  | 5203.76          | 94.04           | 1.57                      | 95.62            | 68.20           | 27.42        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

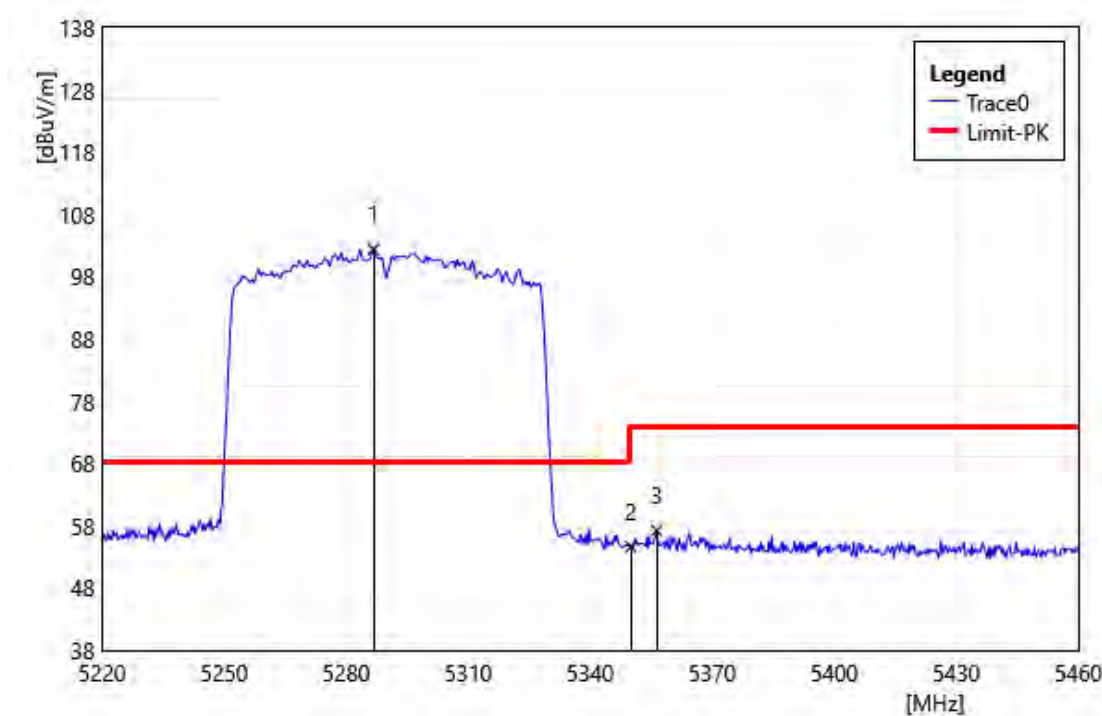


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5286.72          | 101.01          | 1.38                      | 102.39           | 68.20           | 34.19        | PEAK   |
| 2  | 5350.00          | 53.45           | 1.16                      | 54.61            | 74.00           | -19.39       | PEAK   |
| 3  | 5356.32          | 56.04           | 1.20                      | 57.24            | 74.00           | -16.76       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

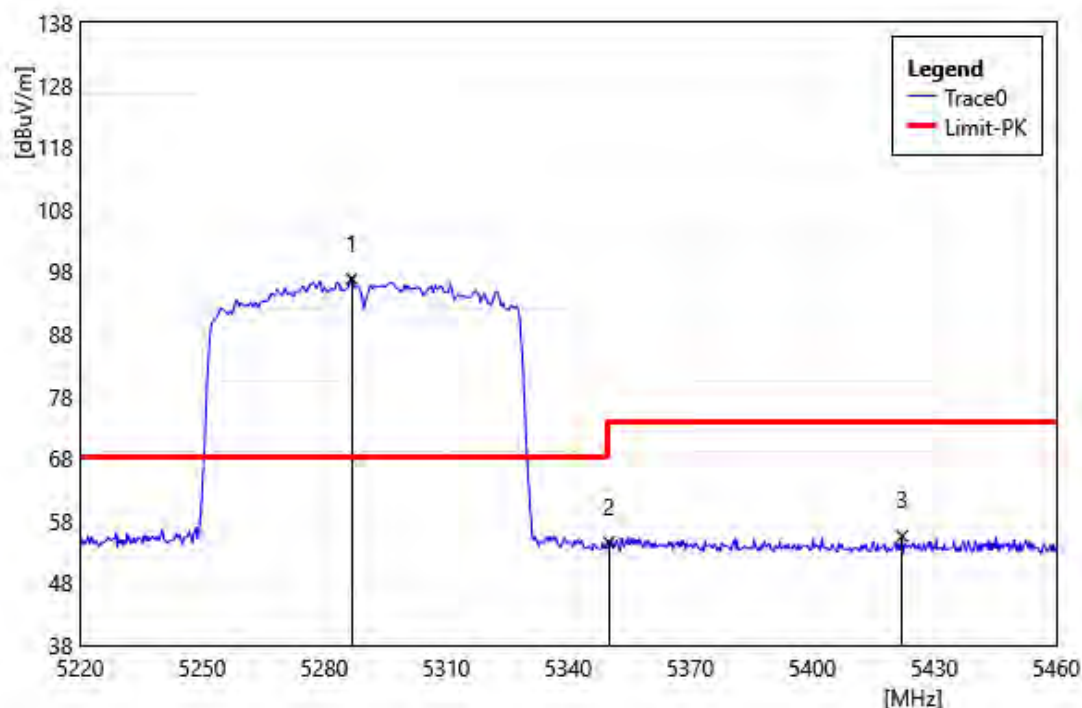


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5286.72          | 95.48           | 1.38                      | 96.86            | 68.20           | 28.66        | PEAK   |
| 2  | 5350.00          | 53.43           | 1.16                      | 54.59            | 74.00           | -19.41       | PEAK   |
| 3  | 5422.08          | 54.02           | 1.53                      | 55.55            | 74.00           | -18.45       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

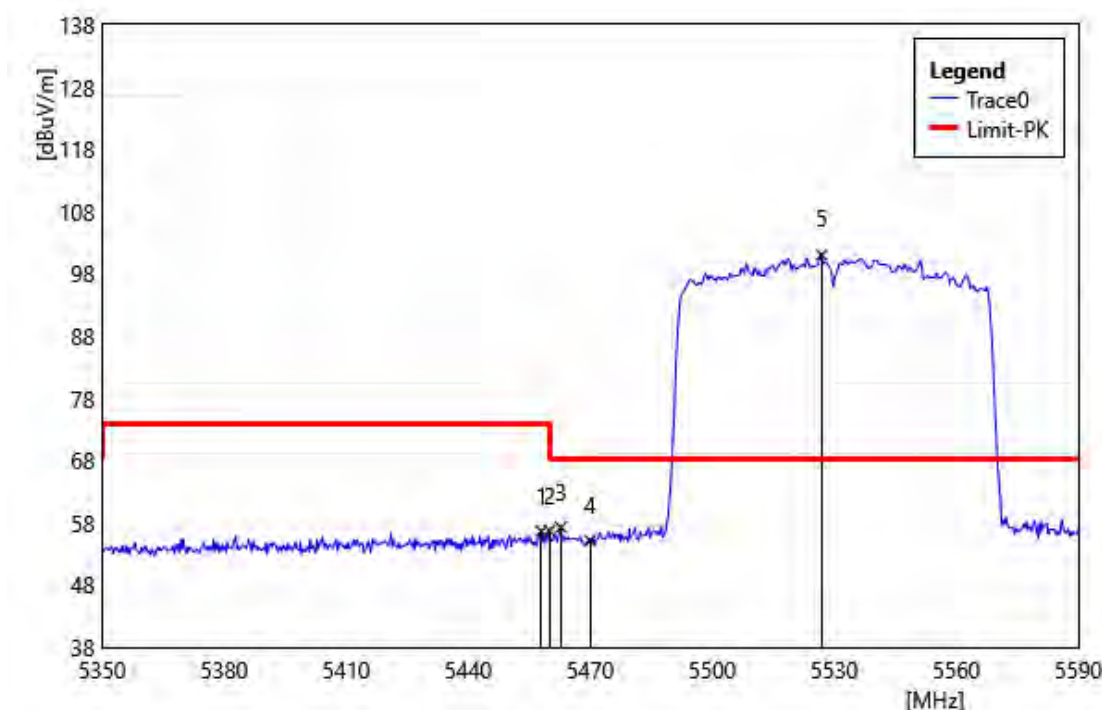


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.00          | 54.97           | 1.68                      | 56.66            | 74.00           | -17.35       | PEAK   |
| 2  | 5460.00          | 55.01           | 1.69                      | 56.70            | 74.00           | -17.30       | PEAK   |
| 3  | 5462.80          | 55.57           | 1.70                      | 57.27            | 68.20           | -10.93       | PEAK   |
| 4  | 5470.00          | 53.42           | 1.72                      | 55.14            | 68.20           | -13.06       | PEAK   |
| 5  | 5526.88          | 99.18           | 1.88                      | 101.06           | 68.20           | 32.86        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

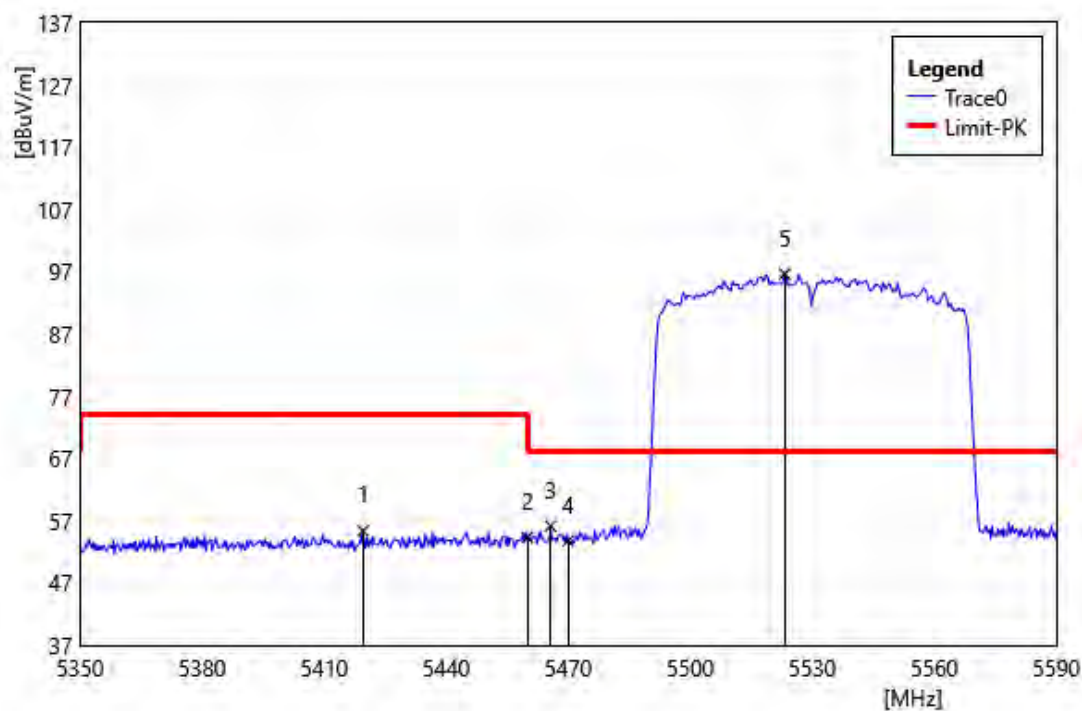


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5419.60          | 53.92           | 1.52                      | 55.44            | 74.00           | -18.56       | PEAK   |
| 2  | 5460.00          | 52.63           | 1.69                      | 54.32            | 74.00           | -19.68       | PEAK   |
| 3  | 5465.68          | 54.44           | 1.71                      | 56.15            | 68.20           | -12.05       | PEAK   |
| 4  | 5470.00          | 52.11           | 1.72                      | 53.83            | 68.20           | -14.37       | PEAK   |
| 5  | 5523.28          | 94.77           | 1.87                      | 96.64            | 68.20           | 28.44        | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

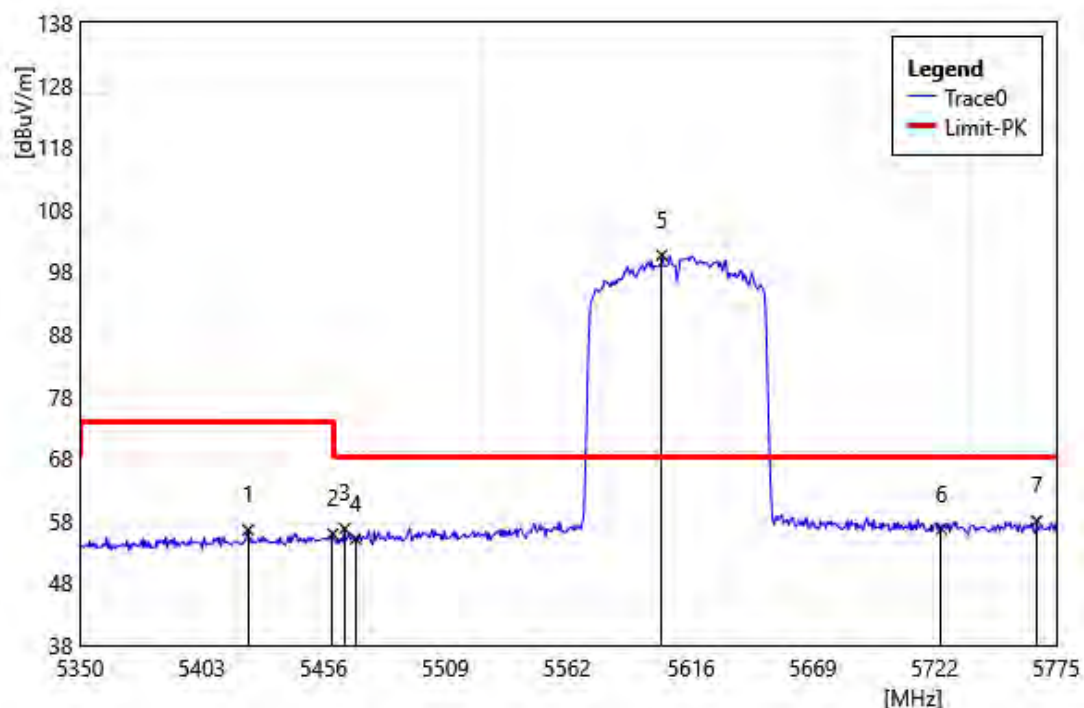


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5423.10          | 55.00           | 1.53                      | 56.53            | 74.00           | -17.47       | PEAK   |
| 2  | 5460.00          | 54.20           | 1.69                      | 55.89            | 74.00           | -18.11       | PEAK   |
| 3  | 5465.18          | 55.01           | 1.71                      | 56.72            | 68.20           | -11.48       | PEAK   |
| 4  | 5470.00          | 53.39           | 1.72                      | 55.11            | 68.20           | -13.09       | PEAK   |
| 5  | 5603.30          | 98.45           | 2.20                      | 100.65           | 68.20           | 32.45        | PEAK   |
| 6  | 5725.00          | 53.99           | 2.69                      | 56.68            | 68.20           | -11.52       | PEAK   |
| 7  | 5766.50          | 55.06           | 2.94                      | 58.01            | 68.20           | -10.20       | PEAK   |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

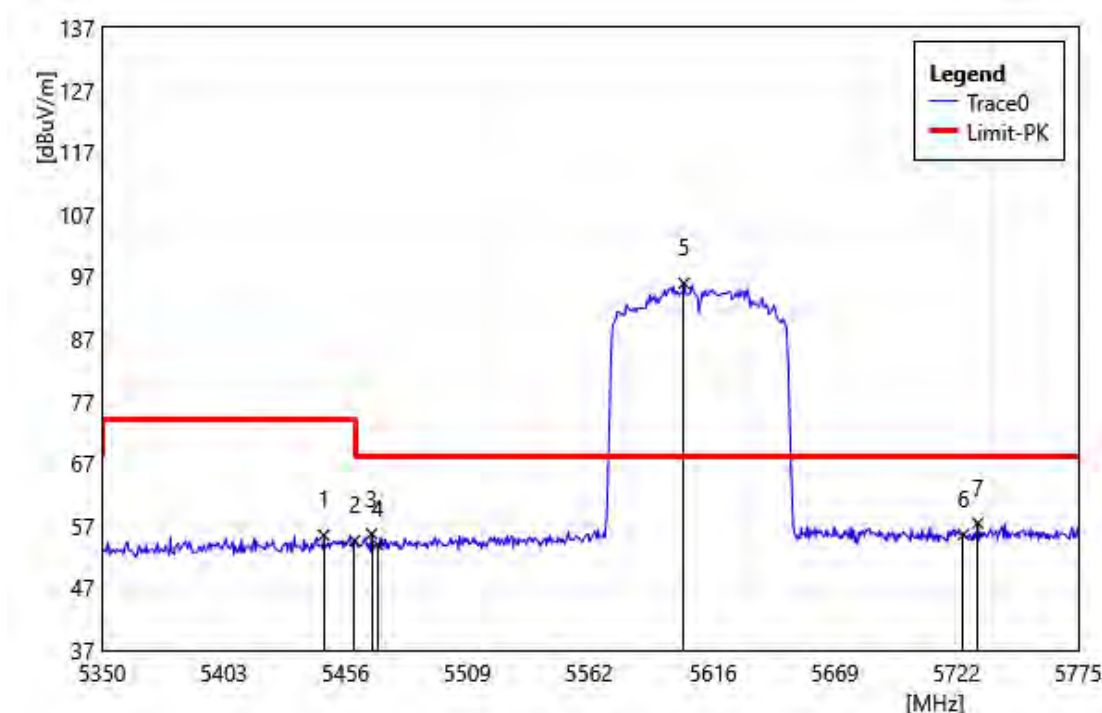

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5446.48          | 53.86           | 1.63                      | 55.49            | 74.00           | -18.51       | PEAK   |
| 2  | 5460.00          | 52.93           | 1.69                      | 54.62            | 74.00           | -19.38       | PEAK   |
| 3  | 5467.30          | 53.95           | 1.72                      | 55.67            | 68.20           | -12.53       | PEAK   |
| 4  | 5470.00          | 52.24           | 1.72                      | 53.96            | 68.20           | -14.24       | PEAK   |
| 5  | 5603.30          | 93.74           | 2.20                      | 95.94            | 68.20           | 27.74        | PEAK   |
| 6  | 5725.00          | 52.92           | 2.69                      | 55.61            | 68.20           | -12.59       | PEAK   |
| 7  | 5731.23          | 54.71           | 2.73                      | 57.44            | 68.20           | -10.76       | PEAK   |


|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

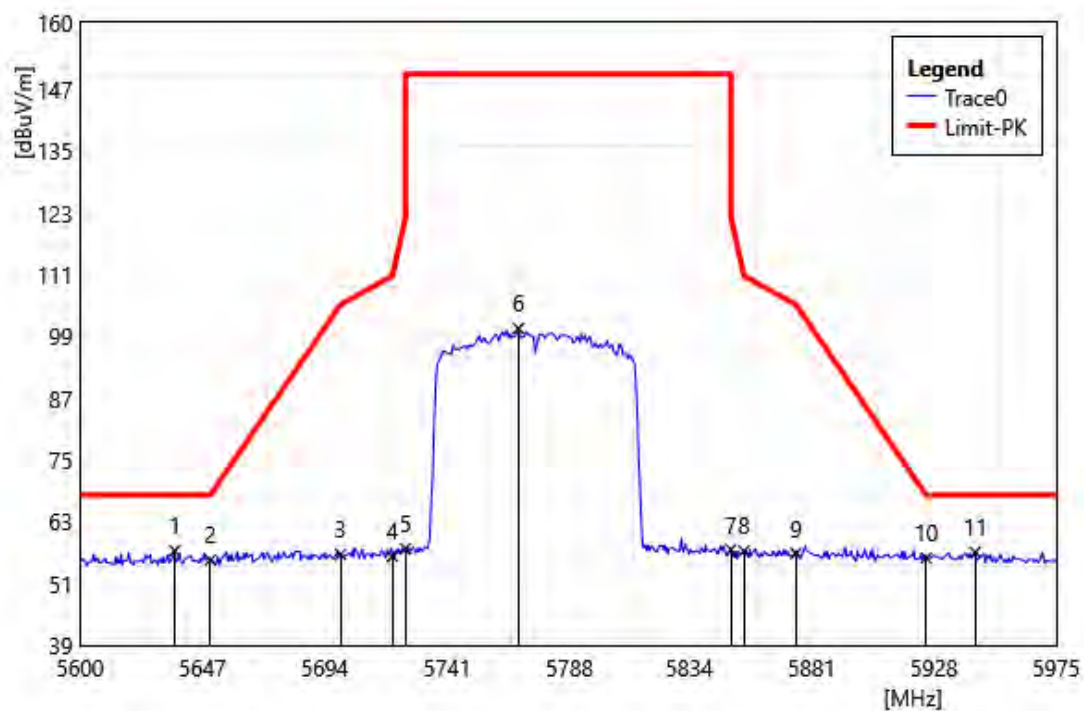

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5636.38          | 54.97           | 2.41                      | 57.38            | 68.20           | -10.82       | PEAK   |
| 2  | 5650.00          | 53.08           | 2.50                      | 55.58            | 68.20           | -12.62       | PEAK   |
| 3  | 5700.00          | 54.12           | 2.52                      | 56.64            | 105.20          | -48.56       | PEAK   |
| 4  | 5720.00          | 53.61           | 2.65                      | 56.26            | 110.80          | -54.54       | PEAK   |
| 5  | 5725.00          | 55.09           | 2.69                      | 57.78            | 150.00          | -92.22       | PEAK   |
| 6  | 5768.38          | 97.65           | 2.94                      | 100.59           | 150.00          | -49.41       | PEAK   |
| 7  | 5850.00          | 54.40           | 3.23                      | 57.63            | 122.20          | -64.57       | PEAK   |
| 8  | 5855.00          | 54.07           | 3.25                      | 57.32            | 110.80          | -53.48       | PEAK   |
| 9  | 5875.00          | 53.50           | 3.35                      | 56.85            | 105.20          | -48.35       | PEAK   |
| 10 | 5925.00          | 52.73           | 3.25                      | 55.98            | 68.20           | -12.22       | PEAK   |
| 11 | 5943.88          | 54.02           | 3.08                      | 57.10            | 68.20           | -11.10       | PEAK   |


|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

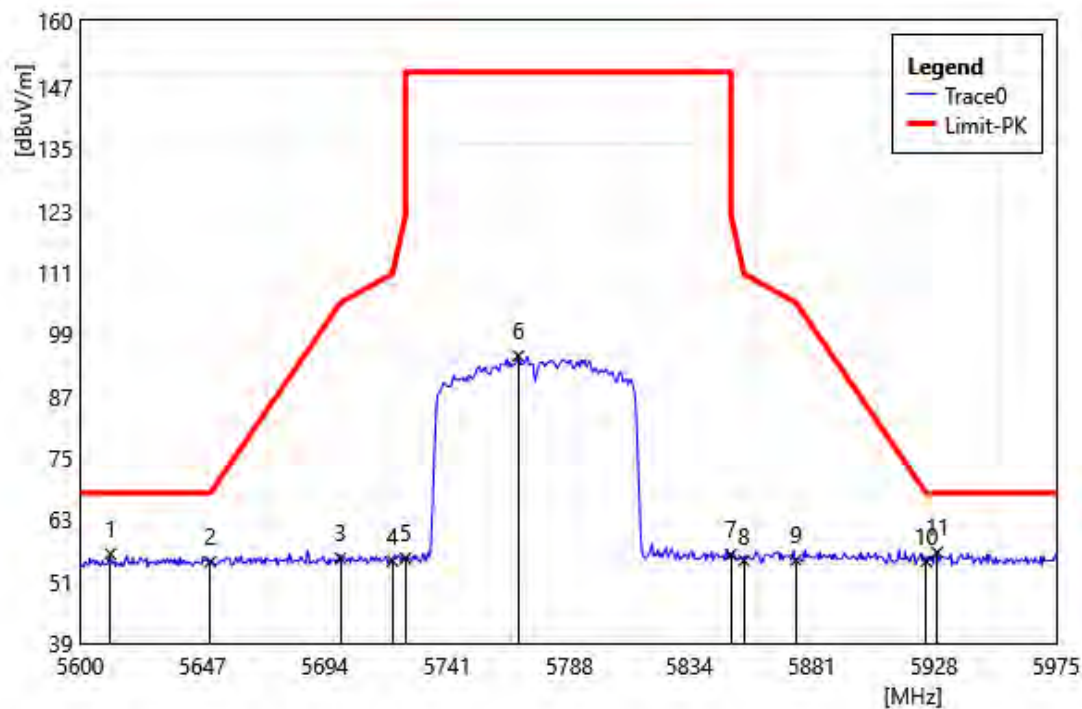

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5775 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5611.63          | 54.12           | 2.25                      | 56.37            | 68.20           | -11.83       | PEAK   |
| 2  | 5650.00          | 52.34           | 2.50                      | 54.84            | 68.20           | -13.37       | PEAK   |
| 3  | 5700.00          | 53.02           | 2.52                      | 55.54            | 105.20          | -49.66       | PEAK   |
| 4  | 5720.00          | 52.37           | 2.65                      | 55.02            | 110.80          | -55.78       | PEAK   |
| 5  | 5725.00          | 52.83           | 2.69                      | 55.52            | 150.00          | -94.48       | PEAK   |
| 6  | 5768.38          | 91.93           | 2.94                      | 94.87            | 150.00          | -55.13       | PEAK   |
| 7  | 5850.00          | 53.01           | 3.23                      | 56.24            | 122.20          | -65.96       | PEAK   |
| 8  | 5855.00          | 51.83           | 3.25                      | 55.08            | 110.80          | -55.72       | PEAK   |
| 9  | 5875.00          | 51.82           | 3.35                      | 55.17            | 105.20          | -50.03       | PEAK   |
| 10 | 5925.00          | 51.70           | 3.25                      | 54.95            | 68.20           | -13.25       | PEAK   |
| 11 | 5929.25          | 53.42           | 3.22                      | 56.65            | 68.20           | -11.56       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

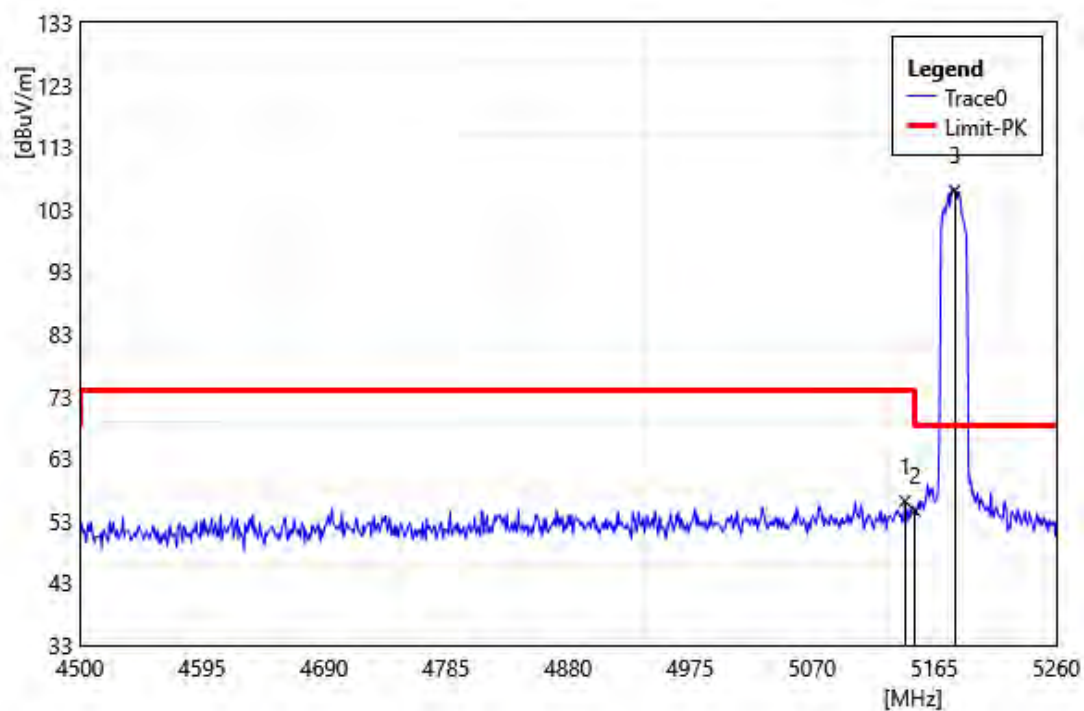


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5142.20          | 54.57           | 1.58                      | 56.15            | 74.00           | -17.85       | PEAK   |
| 2  | 5150.00          | 53.01           | 1.56                      | 54.57            | 74.00           | -19.43       | PEAK   |
| 3  | 5180.96          | 104.48          | 1.57                      | 106.05           | 68.20           | 37.85        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

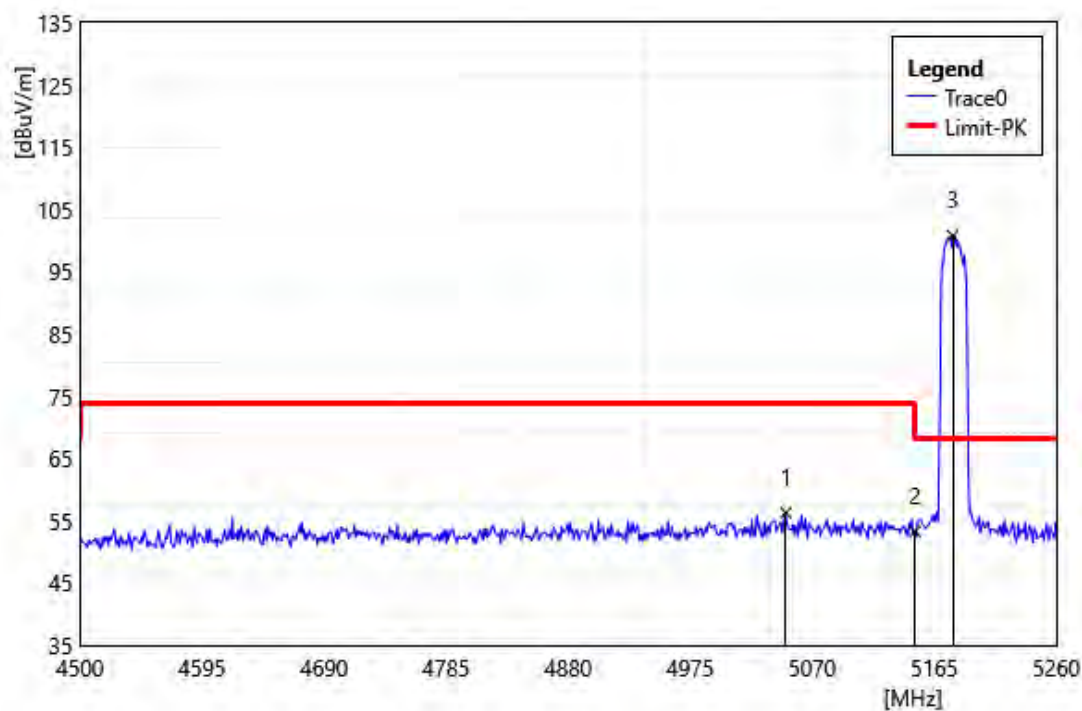


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5049.48          | 54.51           | 1.80                      | 56.31            | 74.00           | -17.69       | PEAK   |
| 2  | 5150.00          | 51.66           | 1.56                      | 53.22            | 74.00           | -20.78       | PEAK   |
| 3  | 5179.44          | 99.17           | 1.57                      | 100.74           | 68.20           | 32.54        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

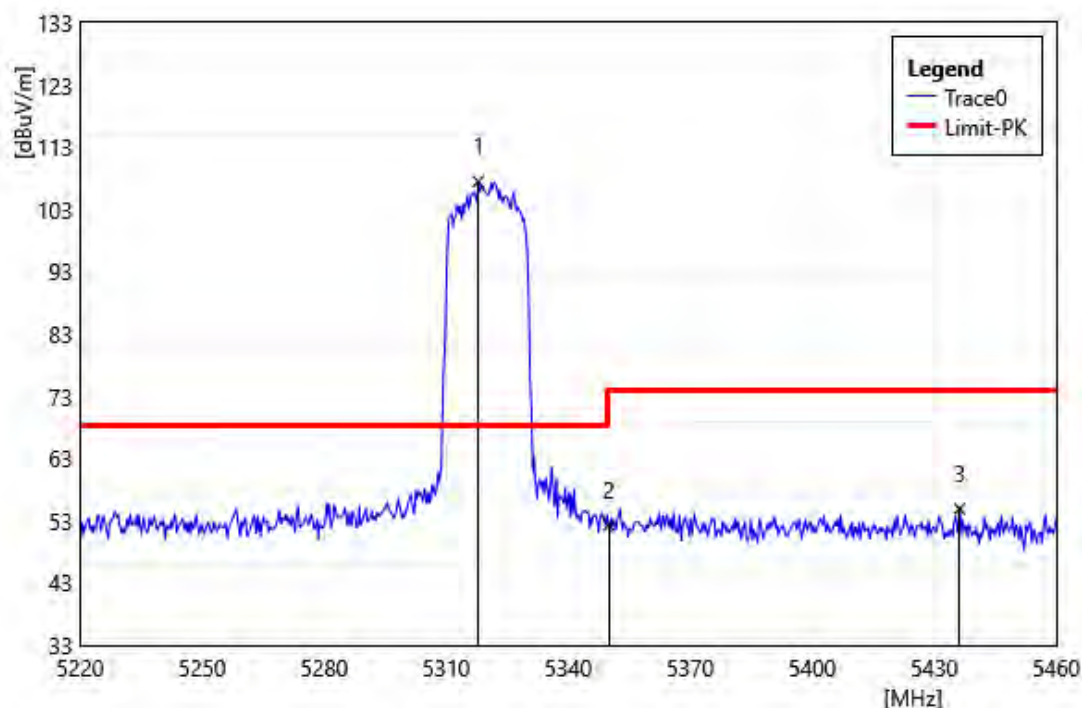


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5317.92          | 106.19          | 1.29                      | 107.48           | 68.20           | 39.28        | PEAK   |
| 2  | 5350.00          | 51.14           | 1.16                      | 52.30            | 74.00           | -21.70       | PEAK   |
| 3  | 5436.24          | 53.35           | 1.58                      | 54.93            | 74.00           | -19.07       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

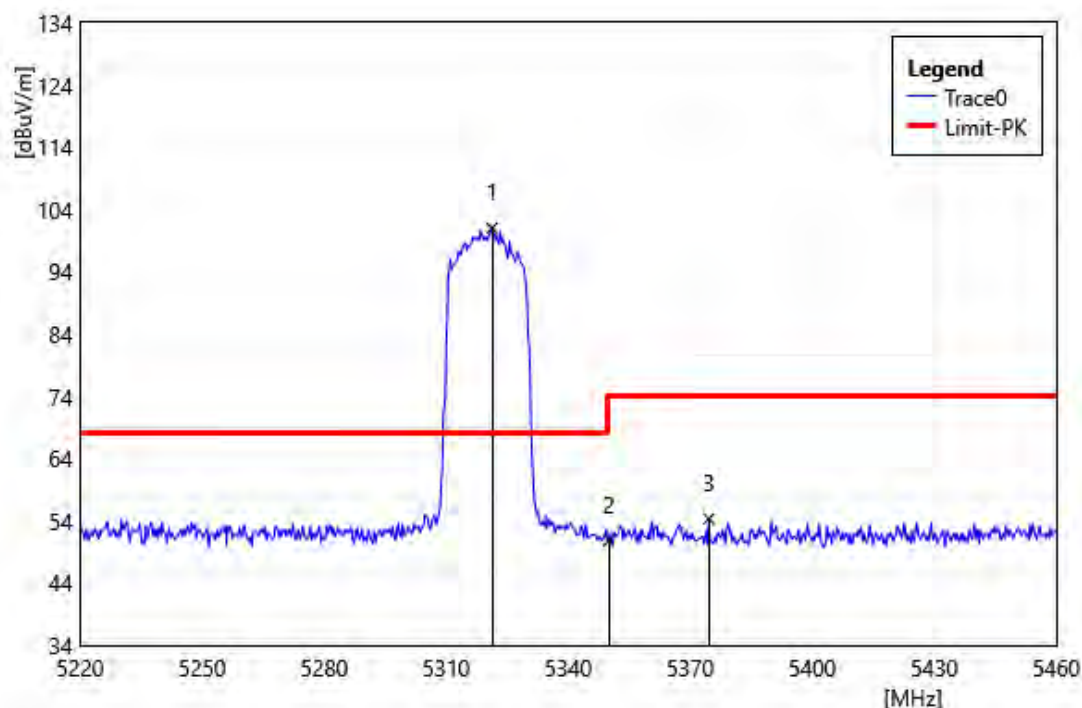


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5321.28          | 99.69           | 1.28                      | 100.97           | 68.20           | 32.77        | PEAK   |
| 2  | 5350.00          | 49.68           | 1.16                      | 50.84            | 74.00           | -23.16       | PEAK   |
| 3  | 5374.56          | 53.01           | 1.30                      | 54.31            | 74.00           | -19.69       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

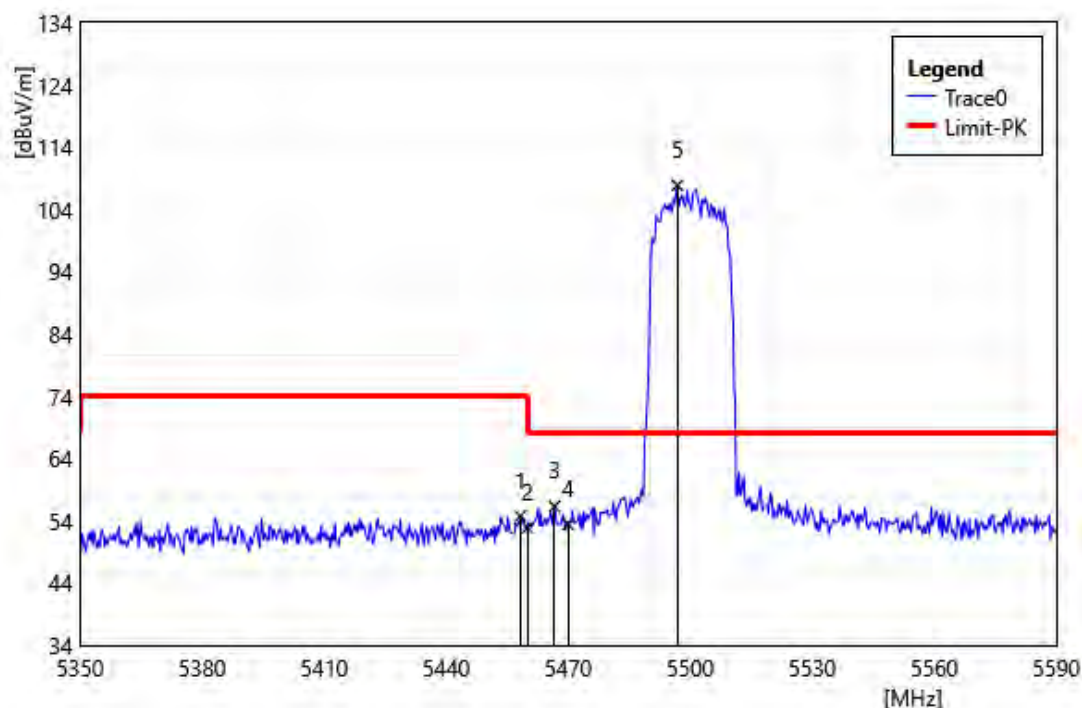


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.24          | 53.08           | 1.68                      | 54.76            | 74.00           | -19.24       | PEAK   |
| 2  | 5460.00          | 51.18           | 1.69                      | 52.87            | 74.00           | -21.13       | PEAK   |
| 3  | 5466.64          | 54.58           | 1.72                      | 56.30            | 68.20           | -11.90       | PEAK   |
| 4  | 5470.00          | 51.71           | 1.72                      | 53.43            | 68.20           | -14.77       | PEAK   |
| 5  | 5496.88          | 106.04          | 1.83                      | 107.87           | 68.20           | 39.67        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

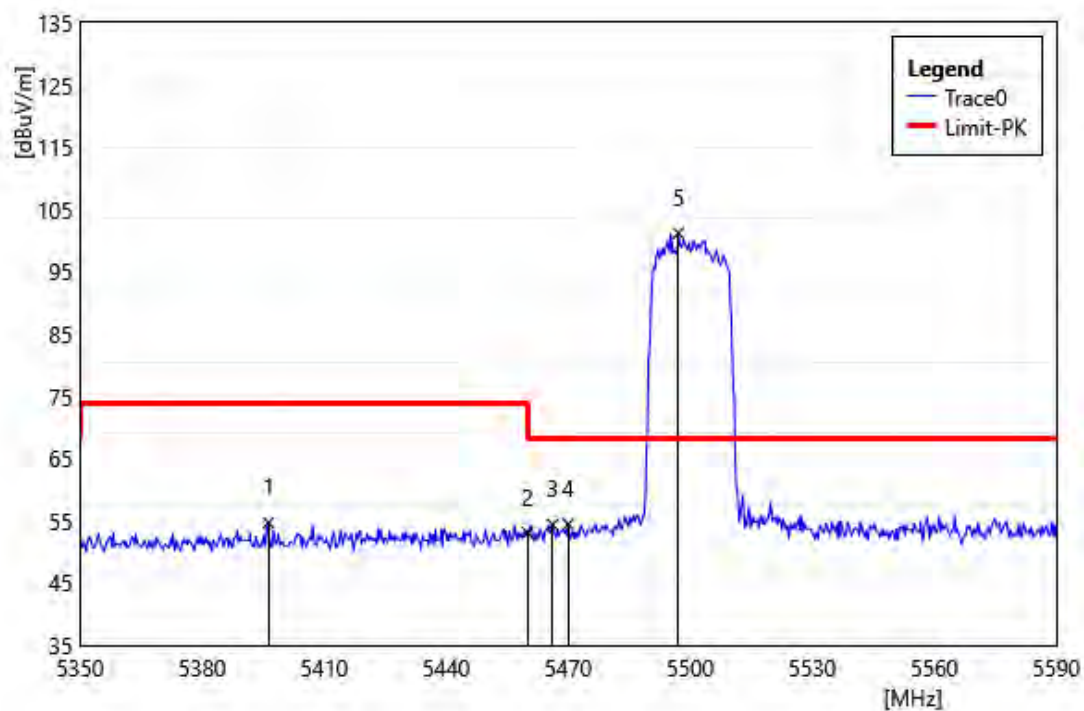


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5396.32          | 53.23           | 1.43                      | 54.66            | 74.00           | -19.34       | PEAK   |
| 2  | 5460.00          | 51.39           | 1.69                      | 53.08            | 74.00           | -20.92       | PEAK   |
| 3  | 5466.16          | 52.65           | 1.71                      | 54.36            | 68.20           | -13.84       | PEAK   |
| 4  | 5470.00          | 52.74           | 1.72                      | 54.46            | 68.20           | -13.74       | PEAK   |
| 5  | 5497.12          | 99.37           | 1.83                      | 101.20           | 68.20           | 33.00        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5700 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

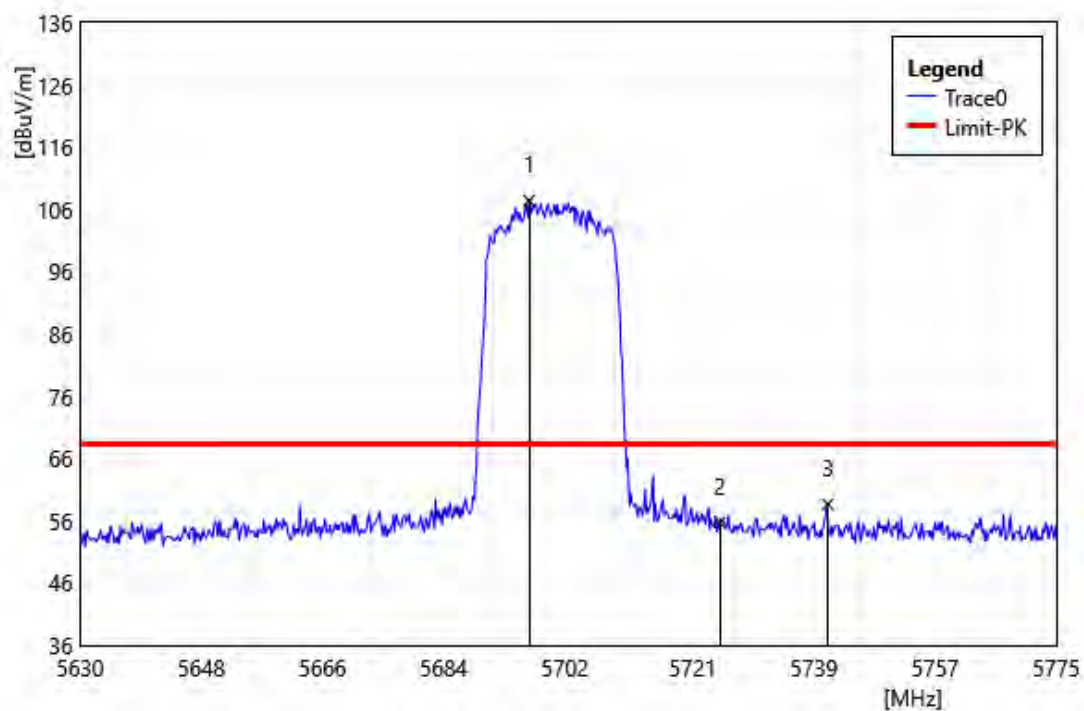


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5696.70          | 104.91          | 2.52                      | 107.43           | 68.20           | 39.23        | PEAK   |
| 2  | 5725.00          | 53.03           | 2.69                      | 55.72            | 68.20           | -12.48       | PEAK   |
| 3  | 5741.07          | 55.87           | 2.79                      | 58.66            | 68.20           | -9.54        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5700 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

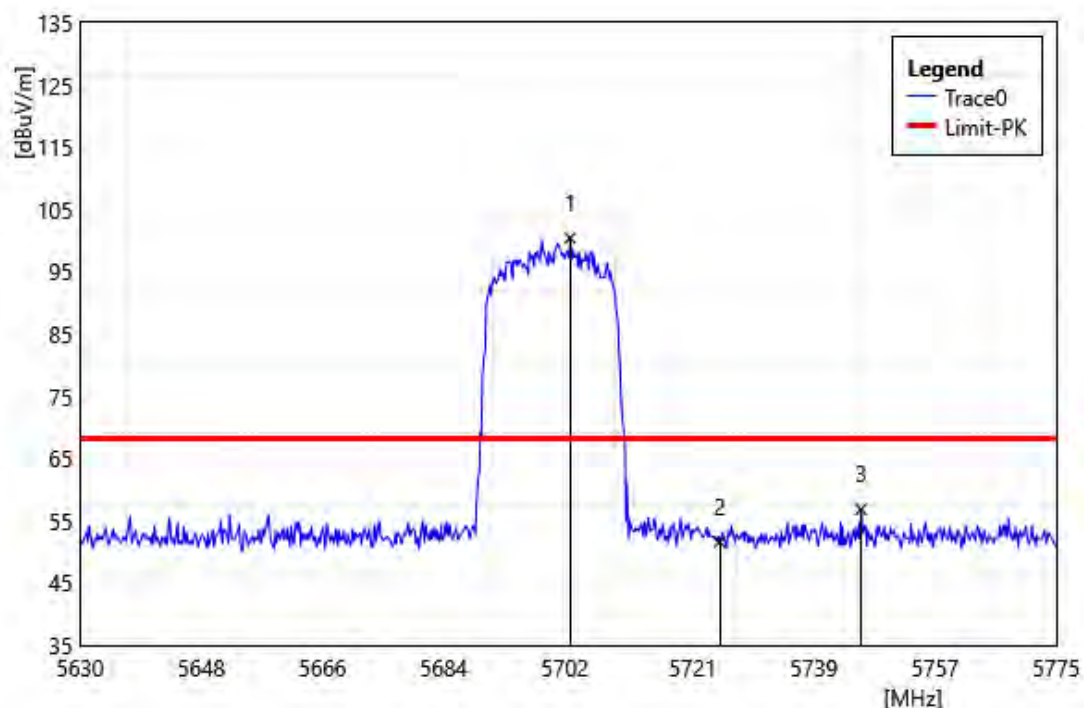


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5702.79          | 97.88           | 2.54                      | 100.42           | 68.20           | 32.22        | PEAK   |
| 2  | 5725.00          | 48.91           | 2.69                      | 51.60            | 68.20           | -16.60       | PEAK   |
| 3  | 5746.00          | 54.03           | 2.83                      | 56.86            | 68.20           | -11.34       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5745 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

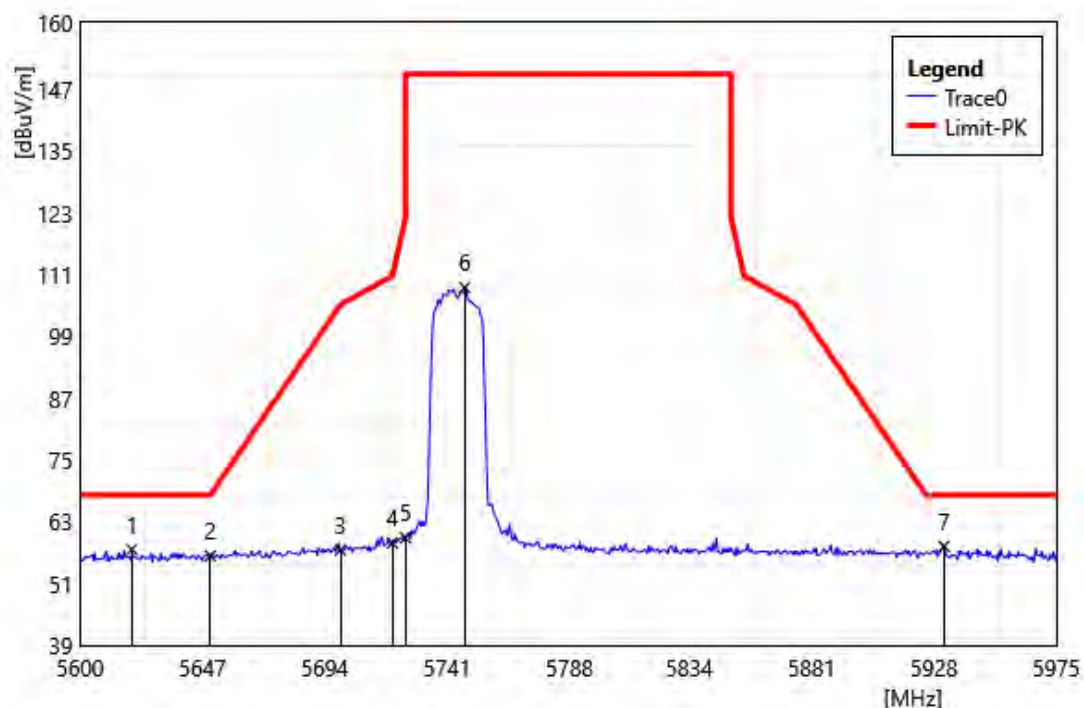


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5619.88          | 55.32           | 2.31                      | 57.63            | 68.20           | -10.57       | PEAK   |
| 2  | 5650.00          | 53.89           | 2.50                      | 56.39            | 68.20           | -11.81       | PEAK   |
| 3  | 5700.00          | 54.99           | 2.52                      | 57.51            | 105.20          | -47.69       | PEAK   |
| 4  | 5720.00          | 56.20           | 2.65                      | 58.85            | 110.80          | -51.95       | PEAK   |
| 5  | 5725.00          | 57.20           | 2.69                      | 59.89            | 150.00          | -90.11       | PEAK   |
| 6  | 5747.75          | 105.71          | 2.84                      | 108.55           | 150.00          | -41.45       | PEAK   |
| 7  | 5931.88          | 55.04           | 3.19                      | 58.23            | 68.20           | -9.97        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5745 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

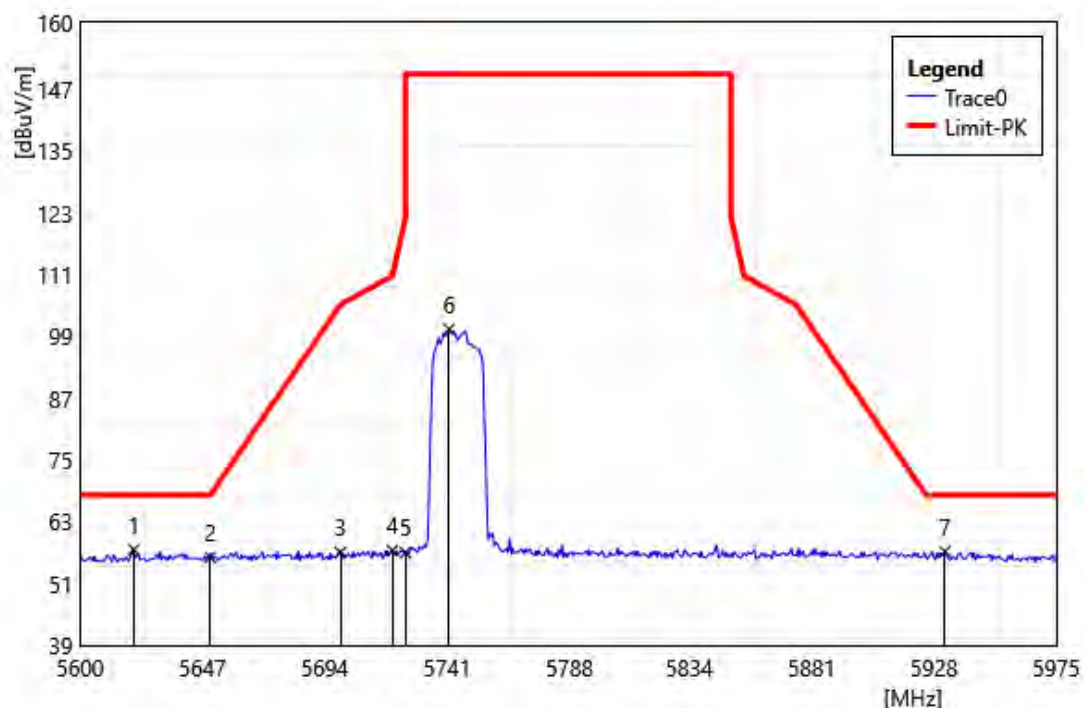


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5620.63          | 55.26           | 2.31                      | 57.57            | 68.20           | -10.63       | PEAK   |
| 2  | 5650.00          | 53.60           | 2.50                      | 56.10            | 68.20           | -12.10       | PEAK   |
| 3  | 5700.00          | 54.54           | 2.52                      | 57.06            | 105.20          | -48.14       | PEAK   |
| 4  | 5720.00          | 54.75           | 2.65                      | 57.40            | 110.80          | -53.40       | PEAK   |
| 5  | 5725.00          | 54.36           | 2.69                      | 57.05            | 150.00          | -92.95       | PEAK   |
| 6  | 5741.75          | 97.66           | 2.79                      | 100.45           | 150.00          | -49.56       | PEAK   |
| 7  | 5932.25          | 54.02           | 3.19                      | 57.21            | 68.20           | -10.99       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5825 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

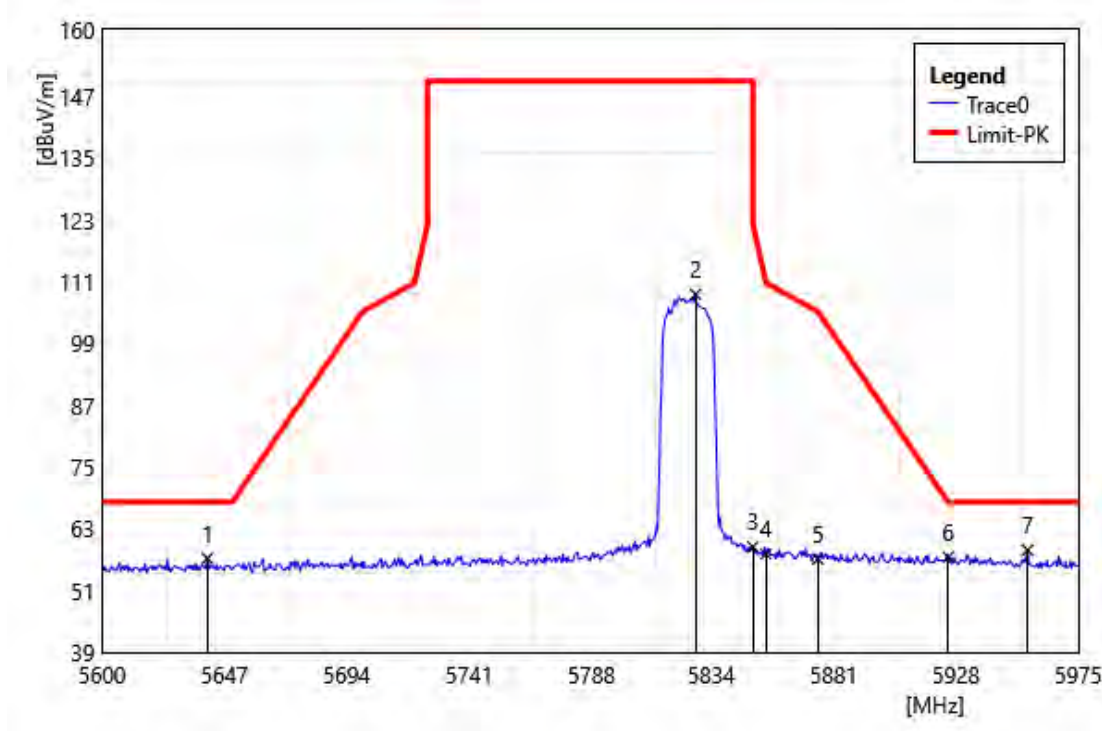


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5640.50          | 54.81           | 2.44                      | 57.25            | 68.20           | -10.95       | PEAK   |
| 2  | 5828.00          | 105.42          | 3.17                      | 108.59           | 150.00          | -41.41       | PEAK   |
| 3  | 5850.00          | 56.25           | 3.23                      | 59.48            | 122.20          | -62.72       | PEAK   |
| 4  | 5855.00          | 54.84           | 3.25                      | 58.09            | 110.80          | -52.71       | PEAK   |
| 5  | 5875.00          | 53.77           | 3.35                      | 57.12            | 105.20          | -48.08       | PEAK   |
| 6  | 5925.00          | 54.27           | 3.25                      | 57.52            | 68.20           | -10.68       | PEAK   |
| 7  | 5955.50          | 55.83           | 3.03                      | 58.87            | 68.20           | -9.34        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5825 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

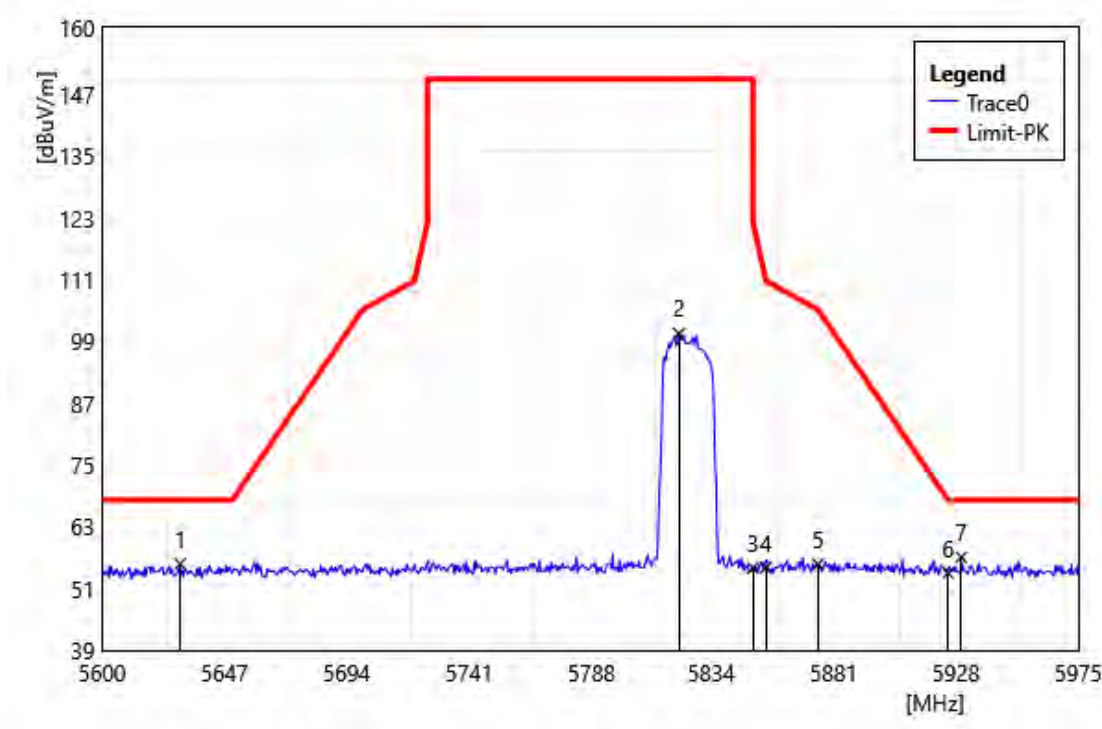


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5630.00          | 53.44           | 2.37                      | 55.81            | 68.20           | -12.39       | PEAK   |
| 2  | 5821.63          | 97.39           | 3.15                      | 100.54           | 150.00          | -49.46       | PEAK   |
| 3  | 5850.00          | 51.79           | 3.23                      | 55.02            | 122.20          | -67.18       | PEAK   |
| 4  | 5855.00          | 51.85           | 3.25                      | 55.10            | 110.80          | -55.70       | PEAK   |
| 5  | 5875.00          | 52.38           | 3.35                      | 55.73            | 105.20          | -49.47       | PEAK   |
| 6  | 5925.00          | 50.75           | 3.25                      | 54.00            | 68.20           | -14.20       | PEAK   |
| 7  | 5930.00          | 53.88           | 3.21                      | 57.09            | 68.20           | -11.11       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

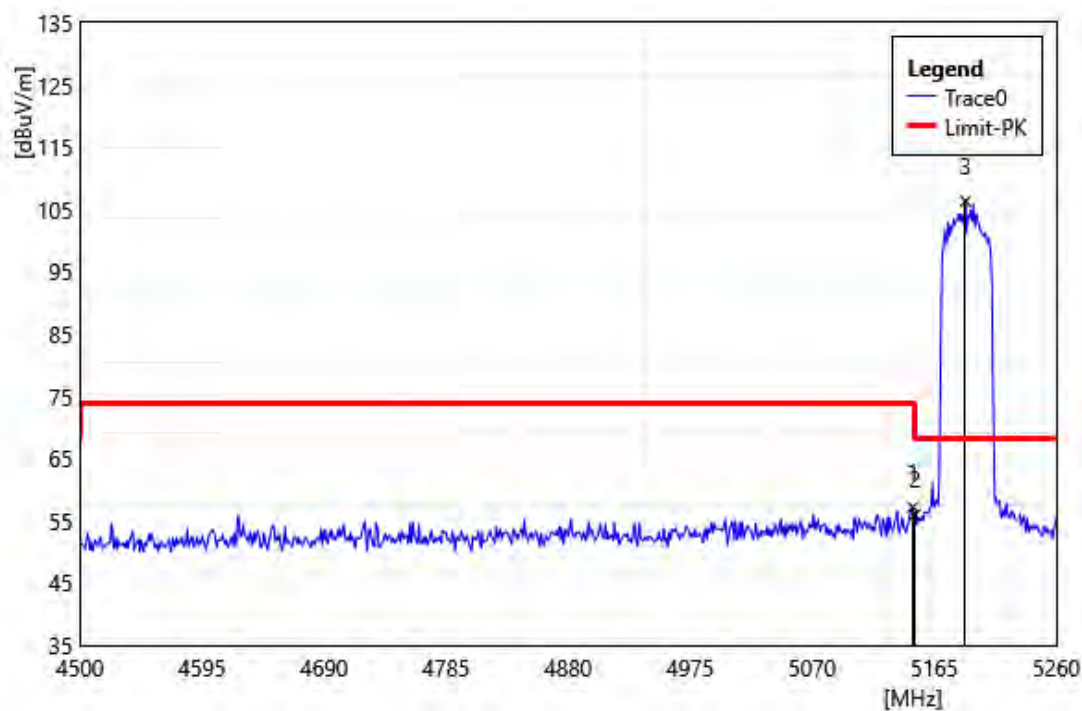


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5148.28          | 55.64           | 1.56                      | 57.20            | 74.00           | -16.80       | PEAK   |
| 2  | 5150.00          | 54.42           | 1.56                      | 55.98            | 74.00           | -18.02       | PEAK   |
| 3  | 5189.32          | 104.76          | 1.57                      | 106.33           | 68.20           | 38.13        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

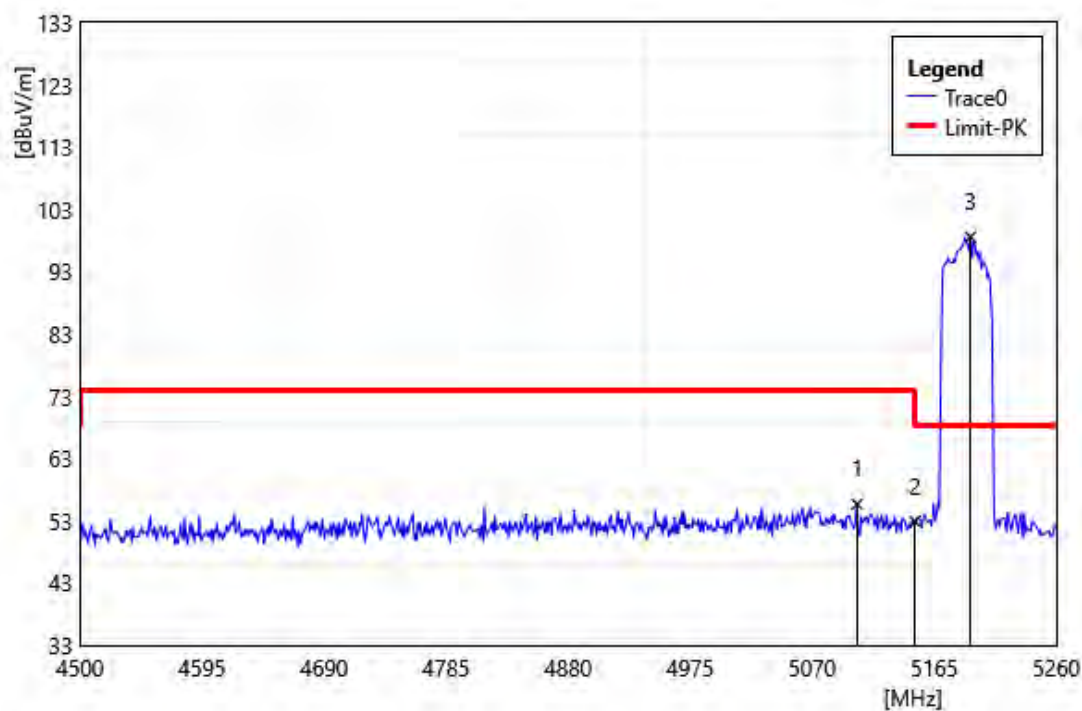


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5104.96          | 53.96           | 1.70                      | 55.66            | 74.00           | -18.35       | PEAK   |
| 2  | 5150.00          | 51.34           | 1.56                      | 52.90            | 74.00           | -21.10       | PEAK   |
| 3  | 5193.12          | 97.00           | 1.58                      | 98.58            | 68.20           | 30.38        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

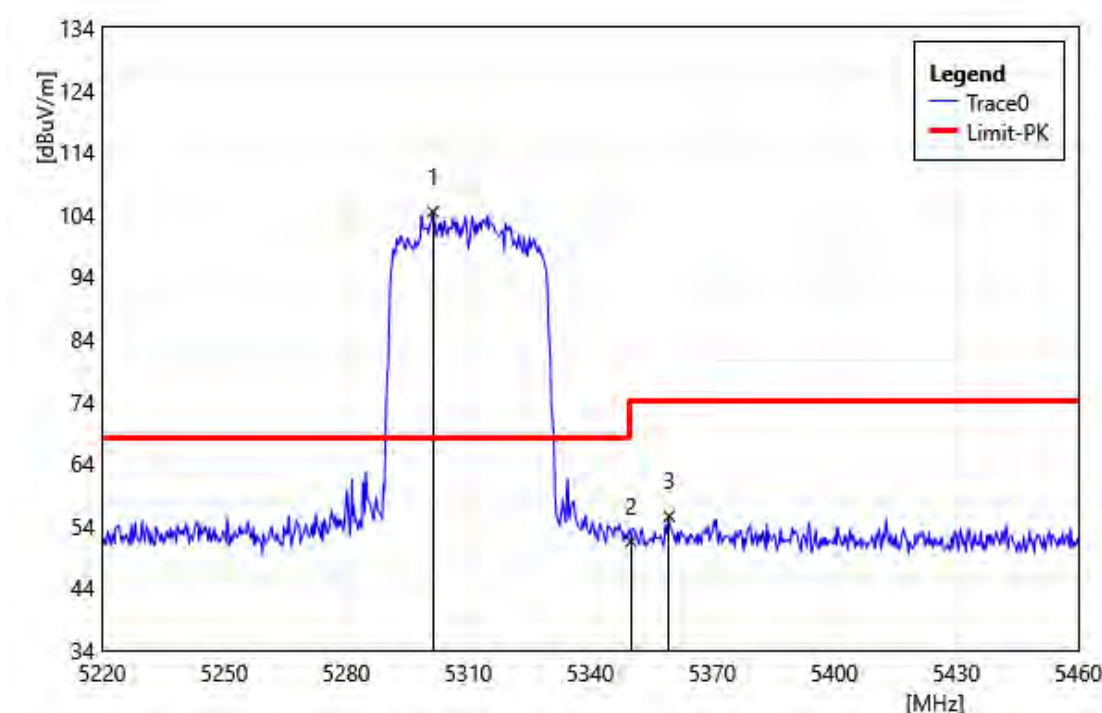


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5301.36          | 103.07          | 1.36                      | 104.43           | 68.20           | 36.23        | PEAK   |
| 2  | 5350.00          | 50.32           | 1.16                      | 51.48            | 74.00           | -22.52       | PEAK   |
| 3  | 5359.44          | 54.32           | 1.21                      | 55.53            | 74.00           | -18.47       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

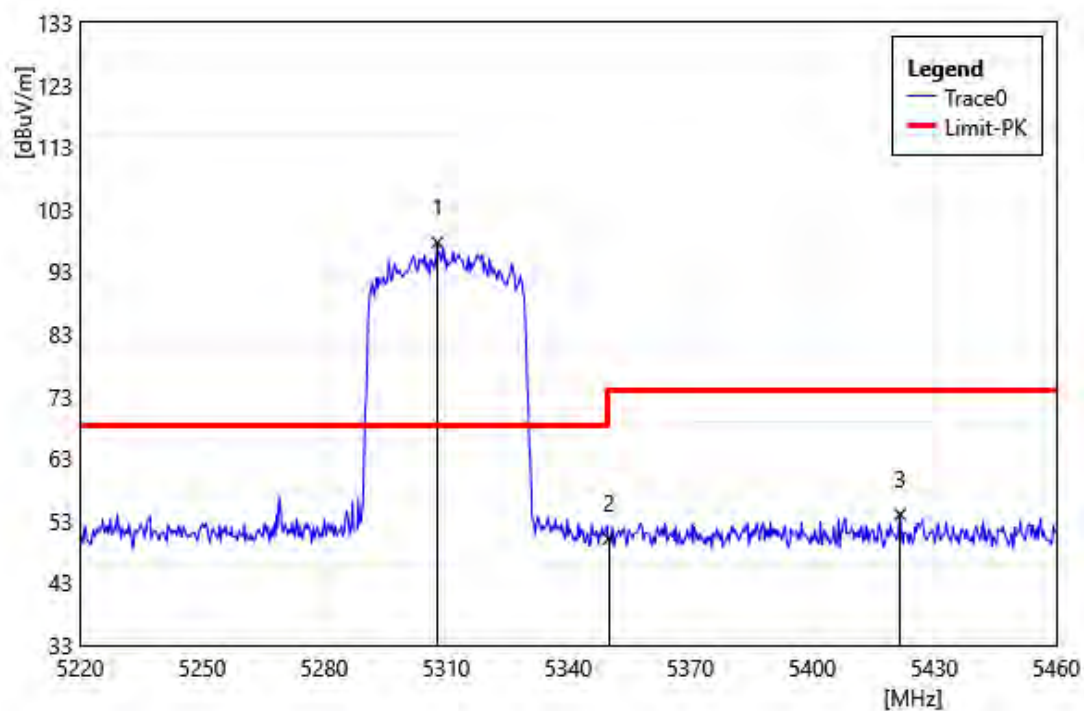


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5307.84          | 96.33           | 1.33                      | 97.66            | 68.20           | 29.46        | PEAK   |
| 2  | 5350.00          | 48.93           | 1.16                      | 50.09            | 74.00           | -23.91       | PEAK   |
| 3  | 5421.60          | 52.49           | 1.53                      | 54.02            | 74.00           | -19.98       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

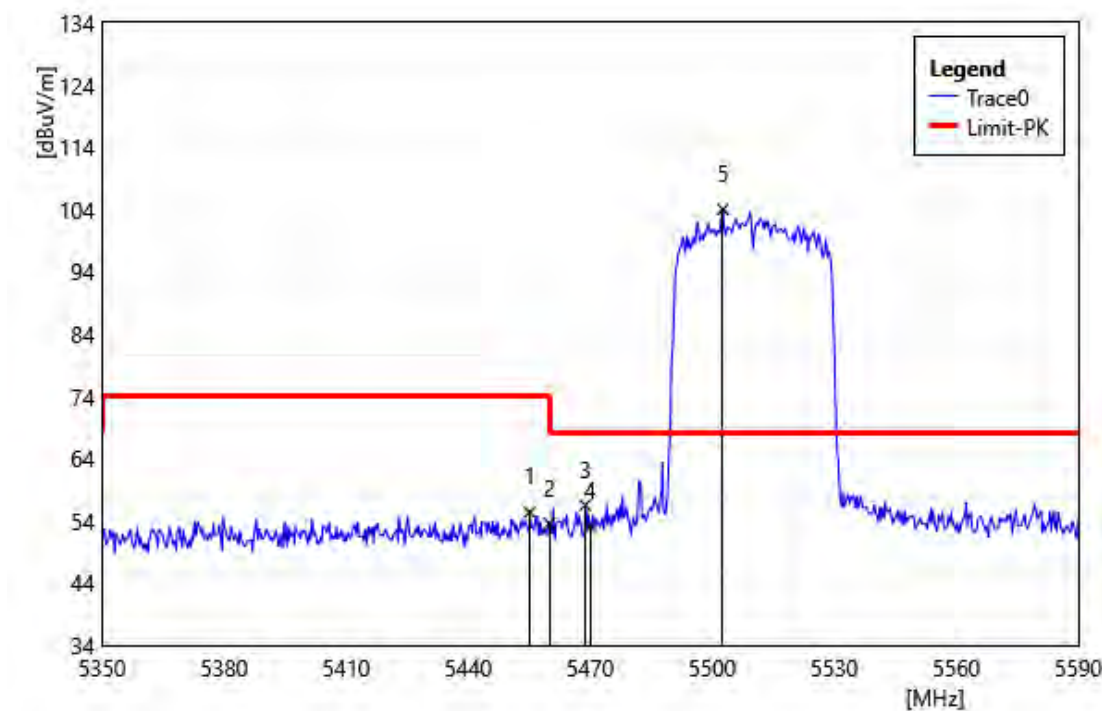


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5455.12          | 53.74           | 1.67                      | 55.41            | 74.00           | -18.59       | PEAK   |
| 2  | 5460.00          | 51.88           | 1.69                      | 53.57            | 74.00           | -20.43       | PEAK   |
| 3  | 5468.80          | 54.78           | 1.72                      | 56.50            | 68.20           | -11.70       | PEAK   |
| 4  | 5470.00          | 51.47           | 1.72                      | 53.19            | 68.20           | -15.01       | PEAK   |
| 5  | 5502.64          | 102.18          | 1.84                      | 104.02           | 68.20           | 35.82        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

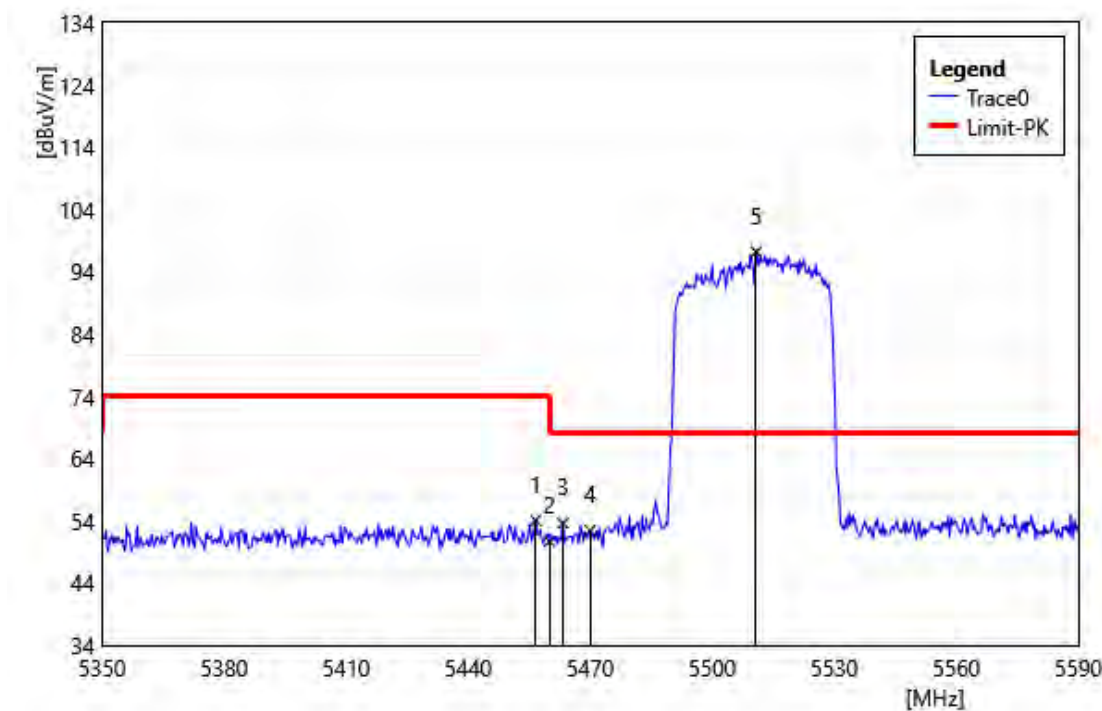


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5456.56          | 52.39           | 1.68                      | 54.07            | 74.00           | -19.93       | PEAK   |
| 2  | 5460.00          | 49.02           | 1.69                      | 50.71            | 74.00           | -23.29       | PEAK   |
| 3  | 5463.28          | 51.92           | 1.70                      | 53.62            | 68.20           | -14.58       | PEAK   |
| 4  | 5470.00          | 50.72           | 1.72                      | 52.44            | 68.20           | -15.76       | PEAK   |
| 5  | 5510.80          | 95.33           | 1.86                      | 97.19            | 68.20           | 28.99        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5670 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

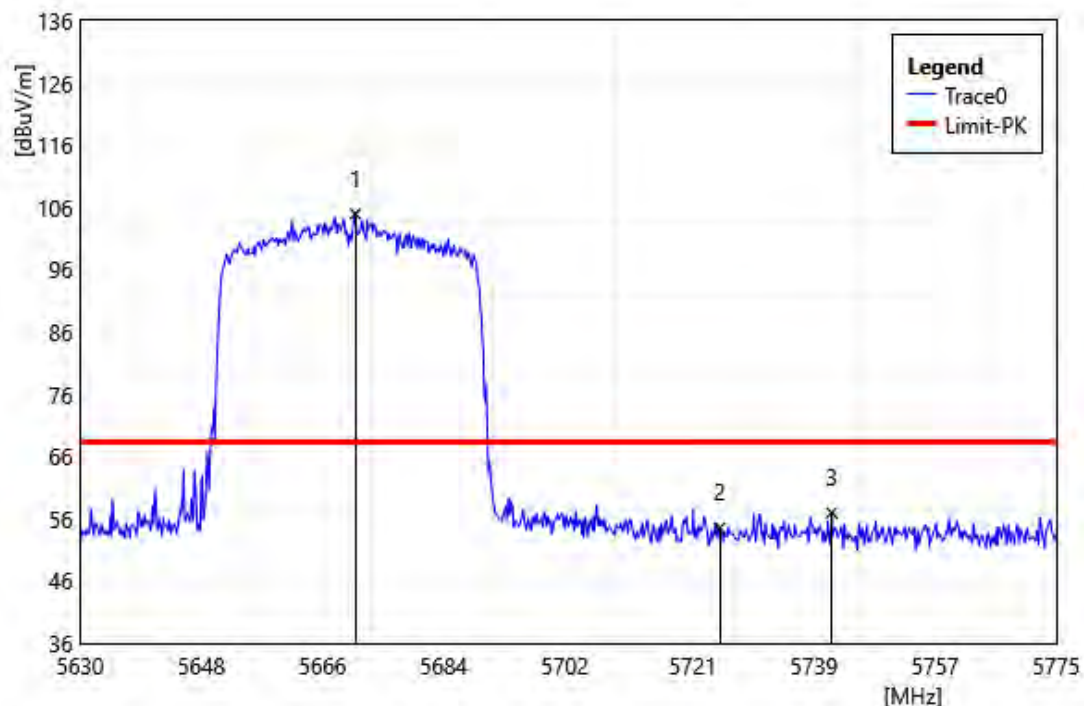


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5670.89          | 102.49          | 2.51                      | 105.00           | 68.20           | 36.80        | PEAK   |
| 2  | 5725.00          | 51.85           | 2.69                      | 54.54            | 68.20           | -13.66       | PEAK   |
| 3  | 5741.65          | 54.18           | 2.79                      | 56.97            | 68.20           | -11.23       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5670 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

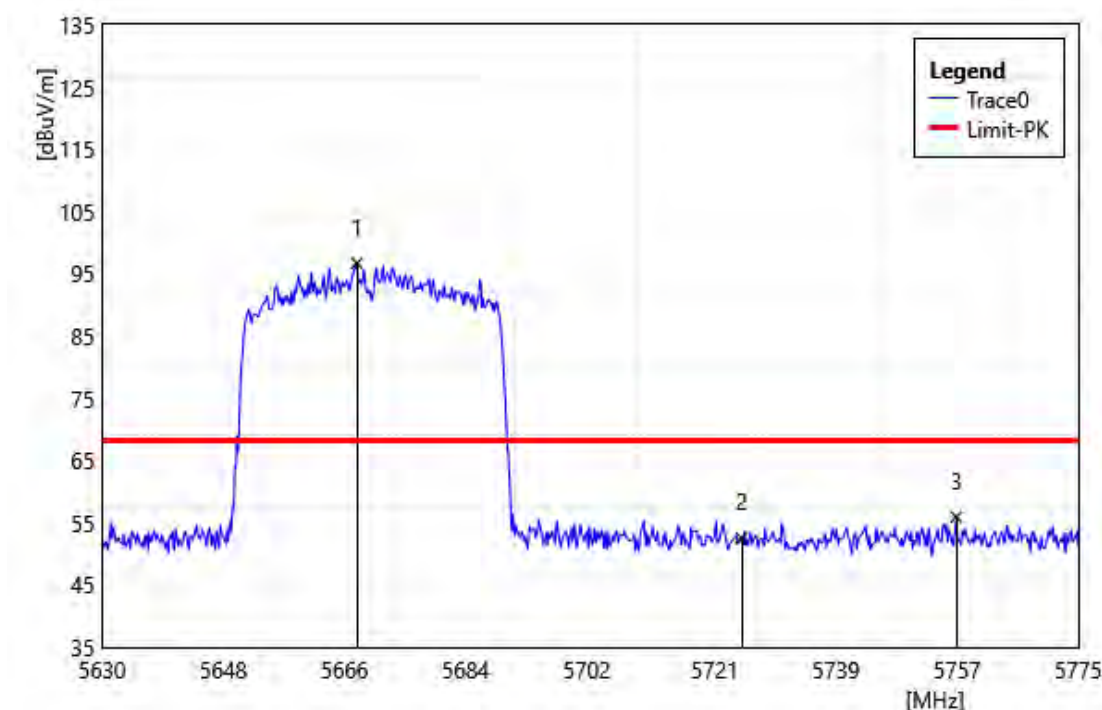


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5667.85          | 94.18           | 2.51                      | 96.69            | 68.20           | 28.49        | PEAK   |
| 2  | 5725.00          | 49.86           | 2.69                      | 52.55            | 68.20           | -15.65       | PEAK   |
| 3  | 5756.88          | 53.06           | 2.89                      | 55.95            | 68.20           | -12.25       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5755 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

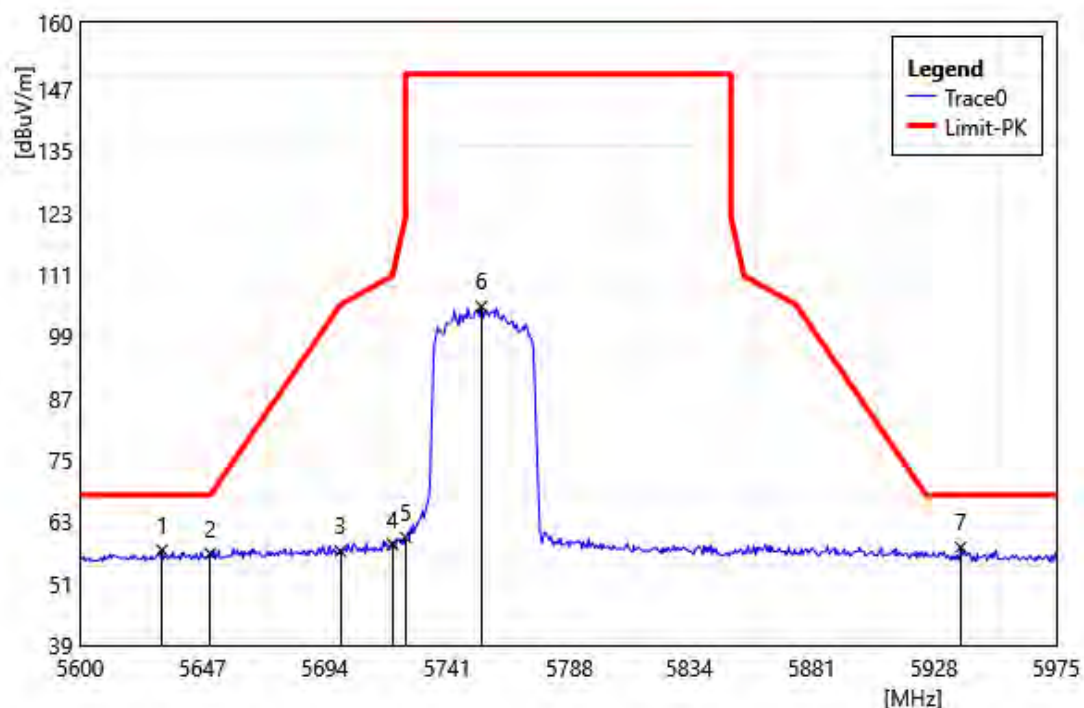


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5631.50          | 55.12           | 2.38                      | 57.50            | 68.20           | -10.70       | PEAK   |
| 2  | 5650.00          | 54.32           | 2.50                      | 56.82            | 68.20           | -11.38       | PEAK   |
| 3  | 5700.00          | 54.77           | 2.52                      | 57.29            | 105.20          | -47.91       | PEAK   |
| 4  | 5720.00          | 56.00           | 2.65                      | 58.65            | 110.80          | -52.15       | PEAK   |
| 5  | 5725.00          | 57.30           | 2.69                      | 59.99            | 150.00          | -90.01       | PEAK   |
| 6  | 5754.13          | 101.94          | 2.88                      | 104.82           | 150.00          | -45.18       | PEAK   |
| 7  | 5938.25          | 54.91           | 3.14                      | 58.05            | 68.20           | -10.15       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5755 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

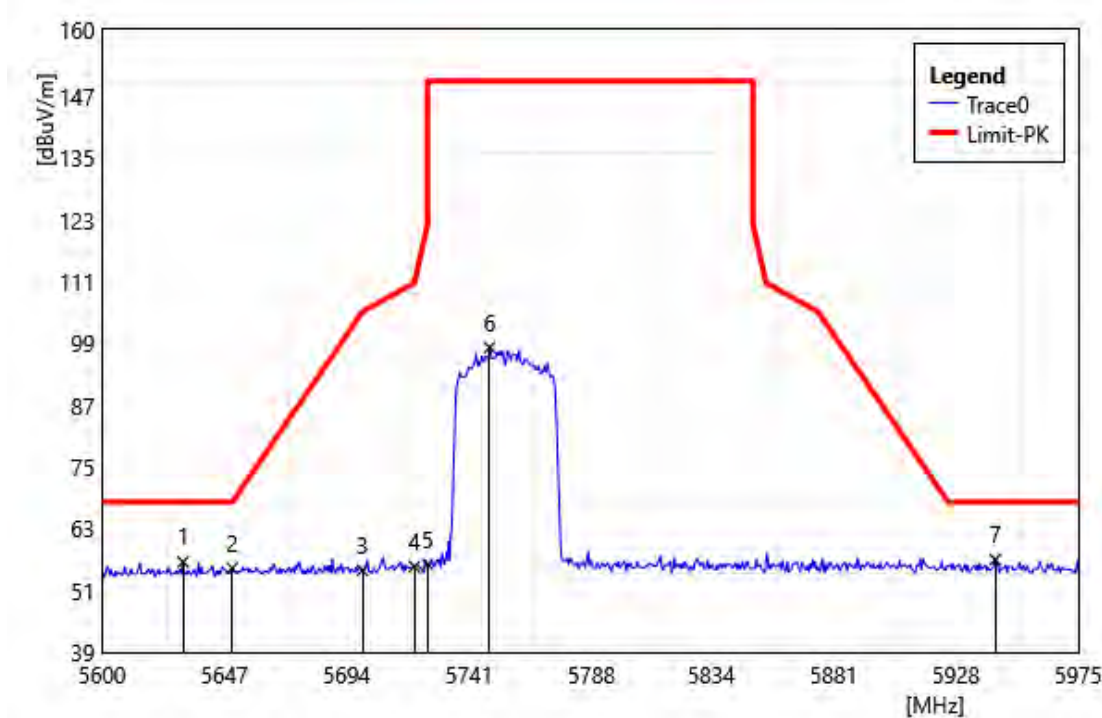


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5631.13          | 54.18           | 2.38                      | 56.56            | 68.20           | -11.64       | PEAK   |
| 2  | 5650.00          | 52.84           | 2.50                      | 55.34            | 68.20           | -12.86       | PEAK   |
| 3  | 5700.00          | 52.42           | 2.52                      | 54.94            | 105.20          | -50.26       | PEAK   |
| 4  | 5720.00          | 53.02           | 2.65                      | 55.67            | 110.80          | -55.13       | PEAK   |
| 5  | 5725.00          | 53.45           | 2.69                      | 56.14            | 150.00          | -93.86       | PEAK   |
| 6  | 5748.88          | 95.41           | 2.84                      | 98.25            | 150.00          | -51.75       | PEAK   |
| 7  | 5943.13          | 53.92           | 3.09                      | 57.01            | 68.20           | -11.19       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5795 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

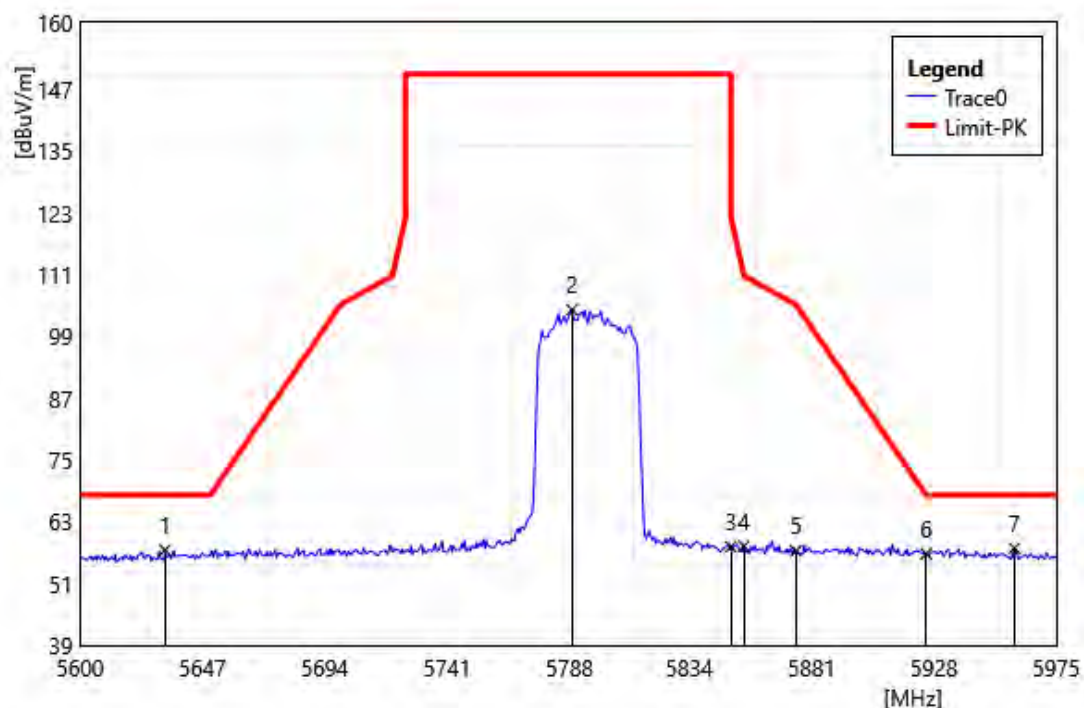


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5632.63          | 55.15           | 2.39                      | 57.54            | 68.20           | -10.66       | PEAK   |
| 2  | 5789.00          | 101.18          | 3.04                      | 104.22           | 150.00          | -45.78       | PEAK   |
| 3  | 5850.00          | 54.92           | 3.23                      | 58.15            | 122.20          | -64.05       | PEAK   |
| 4  | 5855.00          | 55.00           | 3.25                      | 58.25            | 110.80          | -52.55       | PEAK   |
| 5  | 5875.00          | 53.98           | 3.35                      | 57.33            | 105.20          | -47.87       | PEAK   |
| 6  | 5925.00          | 53.52           | 3.25                      | 56.77            | 68.20           | -11.43       | PEAK   |
| 7  | 5958.88          | 54.84           | 3.02                      | 57.86            | 68.20           | -10.34       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5795 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

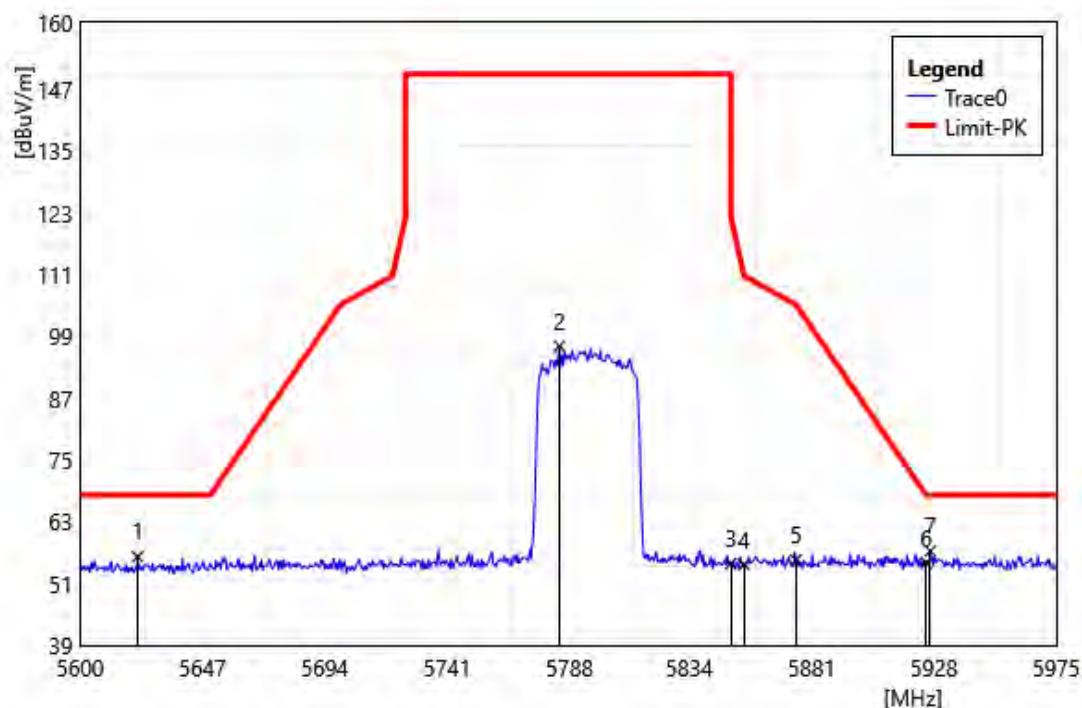


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5622.13          | 53.90           | 2.32                      | 56.22            | 68.20           | -11.98       | PEAK   |
| 2  | 5784.13          | 94.11           | 3.02                      | 97.13            | 150.00          | -52.87       | PEAK   |
| 3  | 5850.00          | 51.63           | 3.23                      | 54.86            | 122.20          | -67.34       | PEAK   |
| 4  | 5855.00          | 51.48           | 3.25                      | 54.73            | 110.80          | -56.07       | PEAK   |
| 5  | 5875.00          | 52.20           | 3.35                      | 55.55            | 105.20          | -49.65       | PEAK   |
| 6  | 5925.00          | 51.80           | 3.25                      | 55.05            | 68.20           | -13.15       | PEAK   |
| 7  | 5926.63          | 54.08           | 3.23                      | 57.31            | 68.20           | -10.89       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

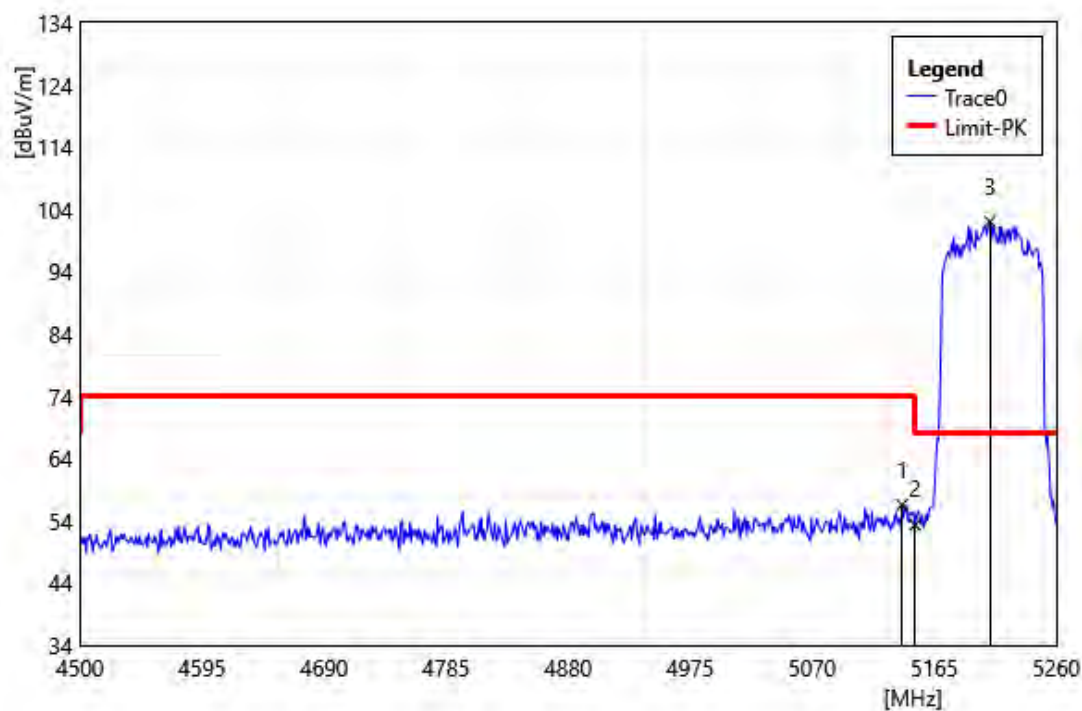


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5139.92          | 54.96           | 1.59                      | 56.55            | 74.00           | -17.46       | PEAK   |
| 2  | 5150.00          | 51.77           | 1.56                      | 53.33            | 74.00           | -20.67       | PEAK   |
| 3  | 5208.32          | 100.49          | 1.55                      | 102.04           | 68.20           | 33.84        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

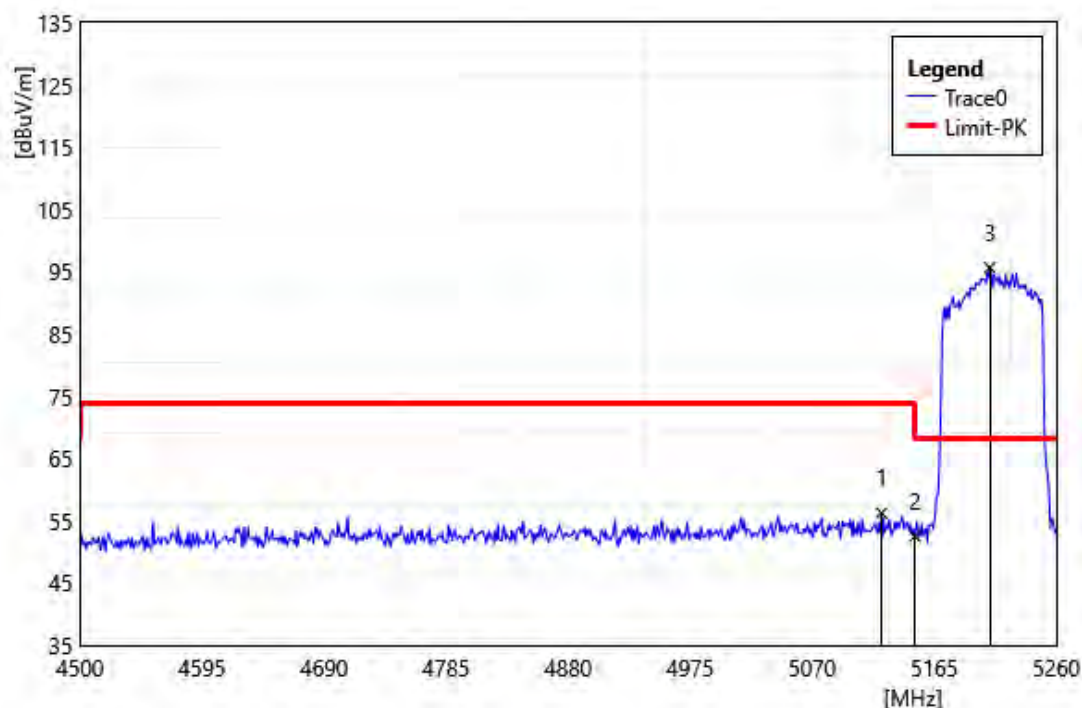


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5123.96          | 54.59           | 1.64                      | 56.23            | 74.00           | -17.77       | PEAK   |
| 2  | 5150.00          | 50.95           | 1.56                      | 52.51            | 74.00           | -21.49       | PEAK   |
| 3  | 5208.32          | 94.08           | 1.55                      | 95.63            | 68.20           | 27.43        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

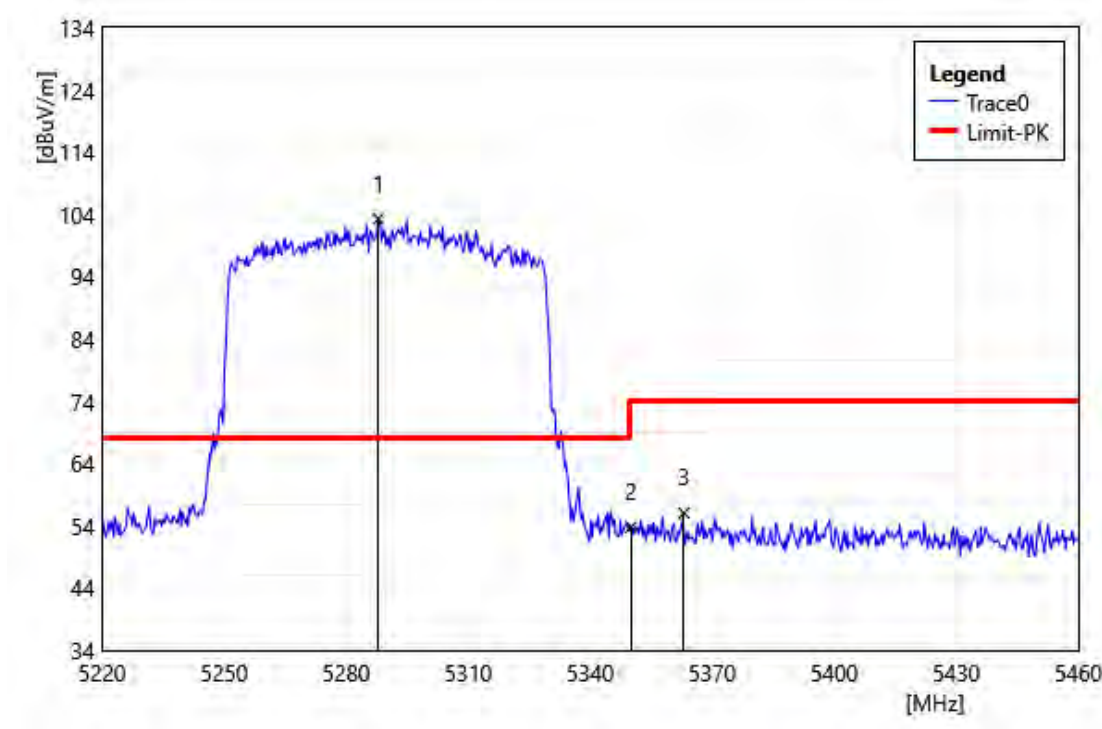


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5287.92          | 101.90          | 1.38                      | 103.28           | 68.20           | 35.08        | PEAK   |
| 2  | 5350.00          | 52.62           | 1.16                      | 53.78            | 74.00           | -20.22       | PEAK   |
| 3  | 5363.04          | 54.82           | 1.23                      | 56.05            | 74.00           | -17.95       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

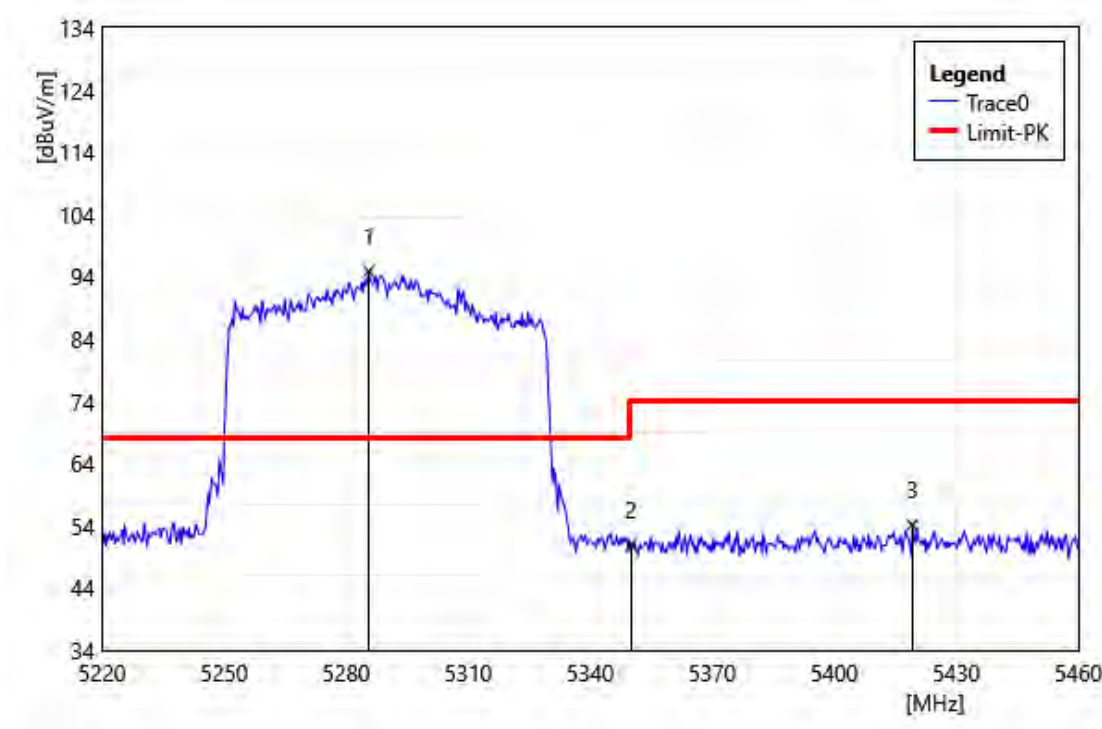


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5285.52          | 93.50           | 1.38                      | 94.88            | 68.20           | 26.68        | PEAK   |
| 2  | 5350.00          | 49.74           | 1.16                      | 50.90            | 74.00           | -23.10       | PEAK   |
| 3  | 5419.20          | 52.63           | 1.52                      | 54.15            | 74.00           | -19.85       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

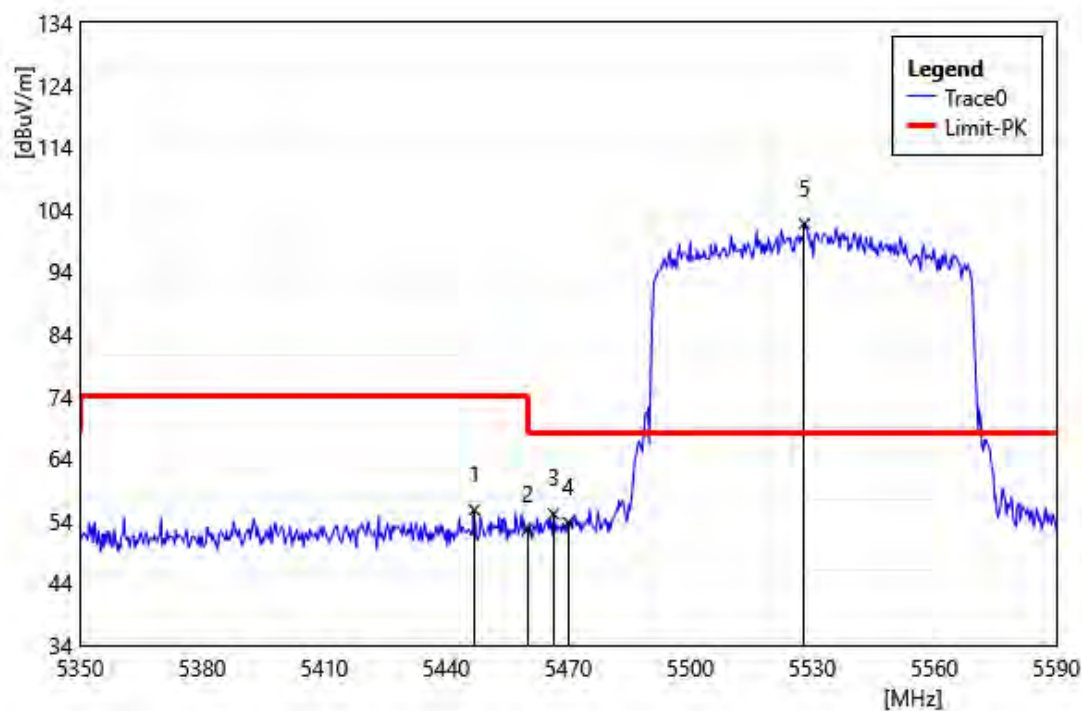


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5446.96          | 54.08           | 1.63                      | 55.71            | 74.00           | -18.29       | PEAK   |
| 2  | 5460.00          | 50.94           | 1.69                      | 52.63            | 74.00           | -21.37       | PEAK   |
| 3  | 5466.40          | 53.39           | 1.72                      | 55.11            | 68.20           | -13.09       | PEAK   |
| 4  | 5470.00          | 52.01           | 1.72                      | 53.73            | 68.20           | -14.47       | PEAK   |
| 5  | 5528.08          | 99.84           | 1.88                      | 101.72           | 68.20           | 33.52        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

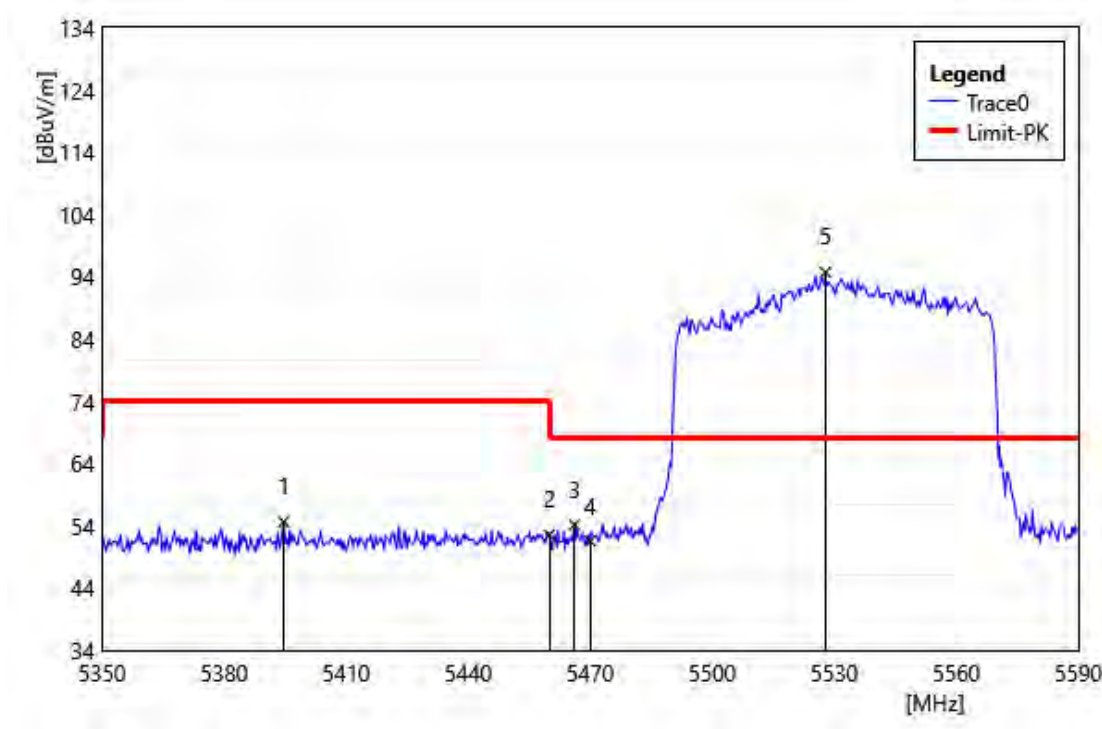


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5394.64          | 53.25           | 1.42                      | 54.67            | 74.00           | -19.33       | PEAK   |
| 2  | 5460.00          | 50.82           | 1.69                      | 52.51            | 74.00           | -21.49       | PEAK   |
| 3  | 5466.16          | 52.48           | 1.71                      | 54.19            | 68.20           | -14.01       | PEAK   |
| 4  | 5470.00          | 49.80           | 1.72                      | 51.52            | 68.20           | -16.68       | PEAK   |
| 5  | 5527.84          | 92.83           | 1.88                      | 94.71            | 68.20           | 26.51        | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

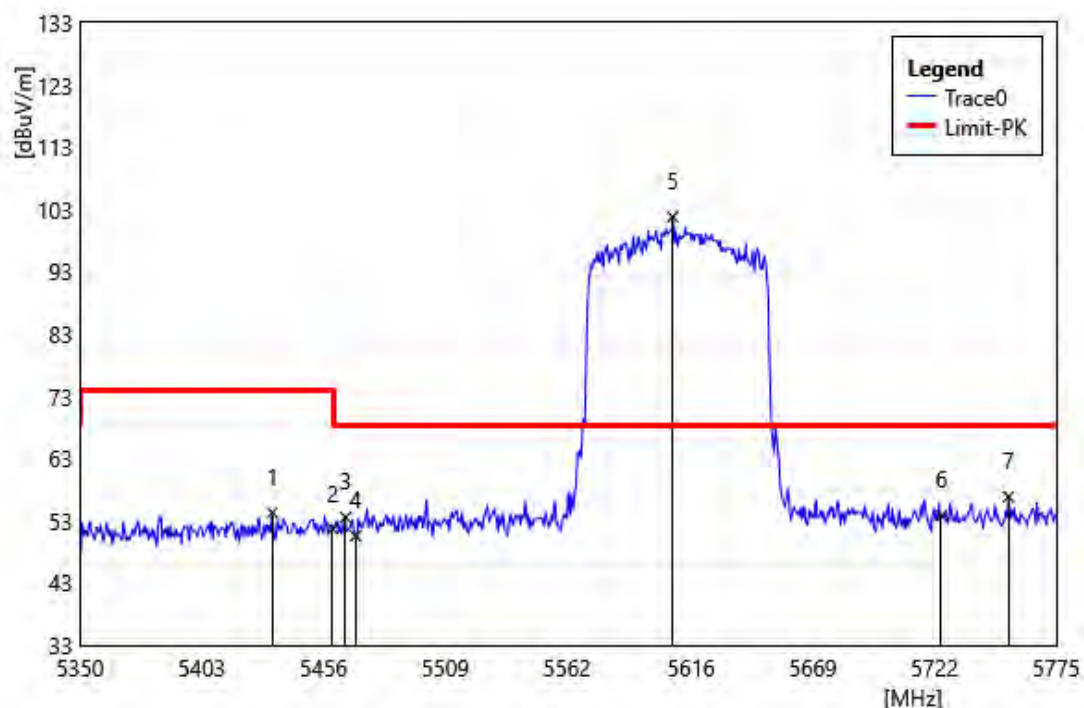


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5433.73          | 52.73           | 1.57                      | 54.30            | 74.00           | -19.70       | PEAK   |
| 2  | 5460.00          | 50.01           | 1.69                      | 51.70            | 74.00           | -22.30       | PEAK   |
| 3  | 5465.60          | 51.83           | 1.71                      | 53.54            | 68.20           | -14.66       | PEAK   |
| 4  | 5470.00          | 48.82           | 1.72                      | 50.54            | 68.20           | -17.66       | PEAK   |
| 5  | 5607.98          | 99.58           | 2.23                      | 101.82           | 68.20           | 33.62        | PEAK   |
| 6  | 5725.00          | 51.14           | 2.69                      | 53.83            | 68.20           | -14.37       | PEAK   |
| 7  | 5754.18          | 53.96           | 2.88                      | 56.84            | 68.20           | -11.36       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

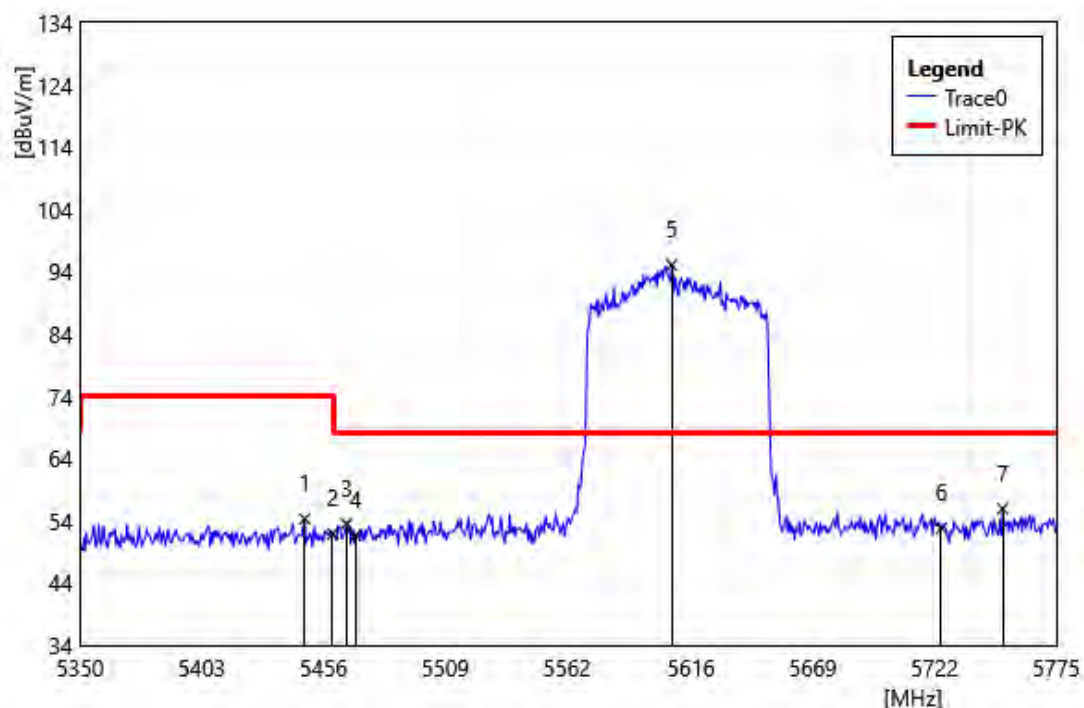

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5447.75          | 52.67           | 1.63                      | 54.30            | 74.00           | -19.70       | PEAK   |
| 2  | 5460.00          | 50.24           | 1.69                      | 51.93            | 74.00           | -22.07       | PEAK   |
| 3  | 5466.03          | 51.82           | 1.71                      | 53.53            | 68.20           | -14.67       | PEAK   |
| 4  | 5470.00          | 49.90           | 1.72                      | 51.62            | 68.20           | -16.58       | PEAK   |
| 5  | 5607.55          | 92.86           | 2.23                      | 95.10            | 68.20           | 26.90        | PEAK   |
| 6  | 5725.00          | 50.09           | 2.69                      | 52.78            | 68.20           | -15.42       | PEAK   |
| 7  | 5751.63          | 53.08           | 2.86                      | 55.95            | 68.20           | -12.26       | PEAK   |


|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

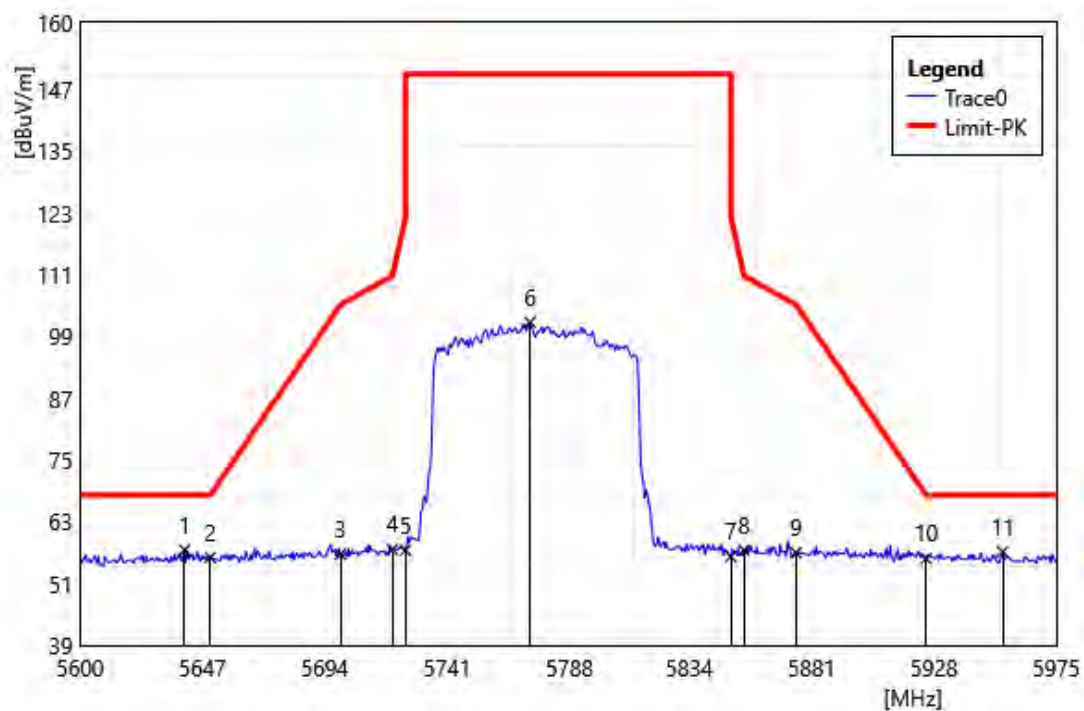

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5640.13          | 55.08           | 2.44                      | 57.52            | 68.20           | -10.68       | PEAK   |
| 2  | 5650.00          | 53.54           | 2.50                      | 56.04            | 68.20           | -12.16       | PEAK   |
| 3  | 5700.00          | 54.19           | 2.52                      | 56.71            | 105.20          | -48.49       | PEAK   |
| 4  | 5720.00          | 55.00           | 2.65                      | 57.65            | 110.80          | -53.15       | PEAK   |
| 5  | 5725.00          | 54.80           | 2.69                      | 57.49            | 150.00          | -92.51       | PEAK   |
| 6  | 5772.88          | 98.83           | 2.96                      | 101.79           | 150.00          | -48.21       | PEAK   |
| 7  | 5850.00          | 53.02           | 3.23                      | 56.25            | 122.20          | -65.95       | PEAK   |
| 8  | 5855.00          | 54.26           | 3.25                      | 57.51            | 110.80          | -53.29       | PEAK   |
| 9  | 5875.00          | 53.63           | 3.35                      | 56.98            | 105.20          | -48.22       | PEAK   |
| 10 | 5925.00          | 52.60           | 3.25                      | 55.85            | 68.20           | -12.35       | PEAK   |
| 11 | 5954.38          | 54.12           | 3.03                      | 57.15            | 68.20           | -11.05       | PEAK   |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

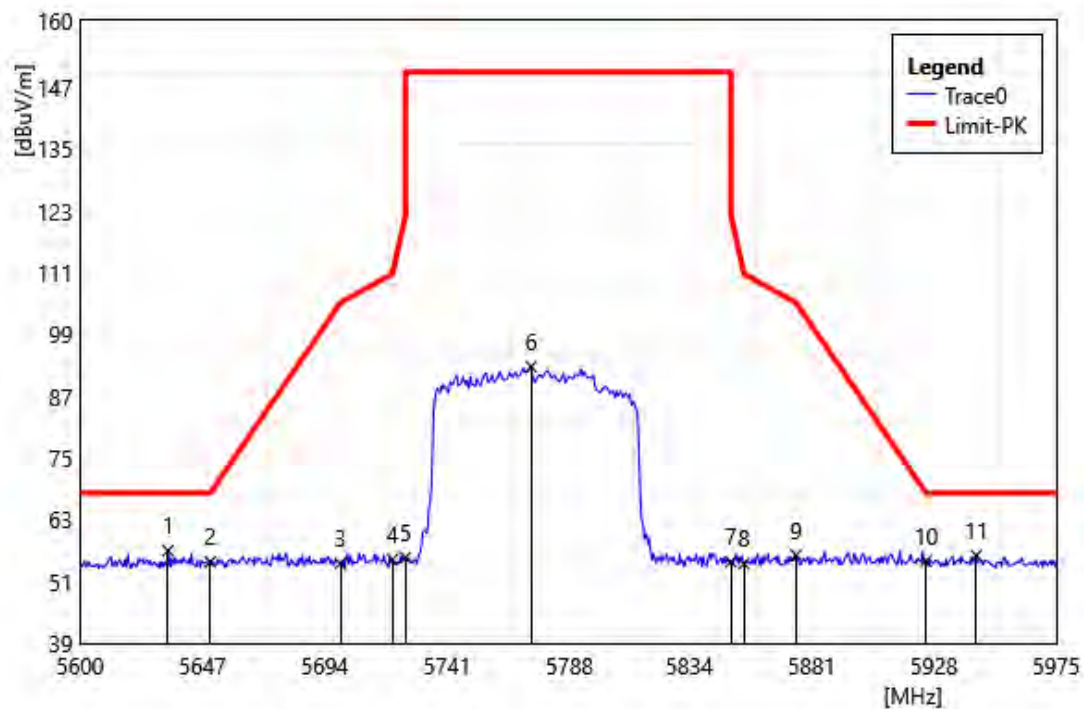


|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5775 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5633.75          | 54.60           | 2.39                      | 57.00            | 68.20           | -11.21       | PEAK   |
| 2  | 5650.00          | 52.33           | 2.50                      | 54.83            | 68.20           | -13.37       | PEAK   |
| 3  | 5700.00          | 51.95           | 2.52                      | 54.47            | 105.20          | -50.73       | PEAK   |
| 4  | 5720.00          | 52.64           | 2.65                      | 55.29            | 110.80          | -55.51       | PEAK   |
| 5  | 5725.00          | 53.00           | 2.69                      | 55.69            | 150.00          | -94.31       | PEAK   |
| 6  | 5773.25          | 89.81           | 2.96                      | 92.77            | 150.00          | -57.23       | PEAK   |
| 7  | 5850.00          | 51.59           | 3.23                      | 54.82            | 122.20          | -67.38       | PEAK   |
| 8  | 5855.00          | 51.19           | 3.25                      | 54.44            | 110.80          | -56.36       | PEAK   |
| 9  | 5875.00          | 52.77           | 3.35                      | 56.12            | 105.20          | -49.08       | PEAK   |
| 10 | 5925.00          | 51.78           | 3.25                      | 55.03            | 68.20           | -13.17       | PEAK   |
| 11 | 5944.25          | 52.99           | 3.08                      | 56.07            | 68.20           | -12.13       | PEAK   |


Average

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

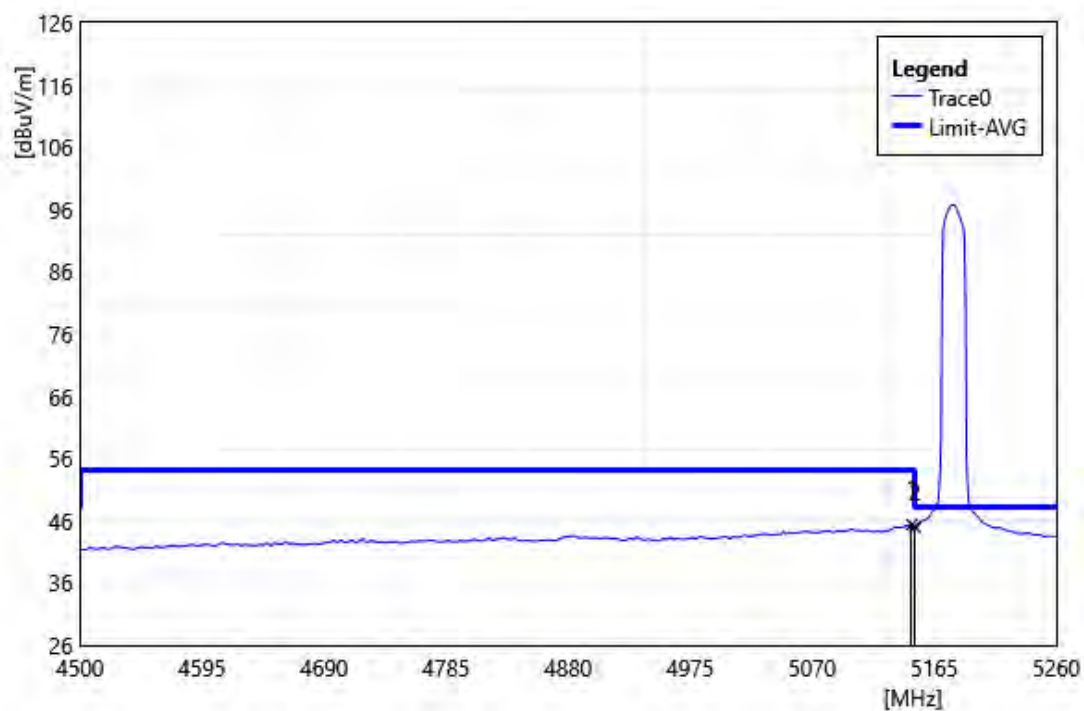


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5147.52          | 43.83           | 1.56                      | 45.39            | 54.00           | -8.61        | AVG    |
| 2  | 5150.00          | 43.43           | 1.56                      | 44.99            | 54.00           | -9.01        | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5180 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

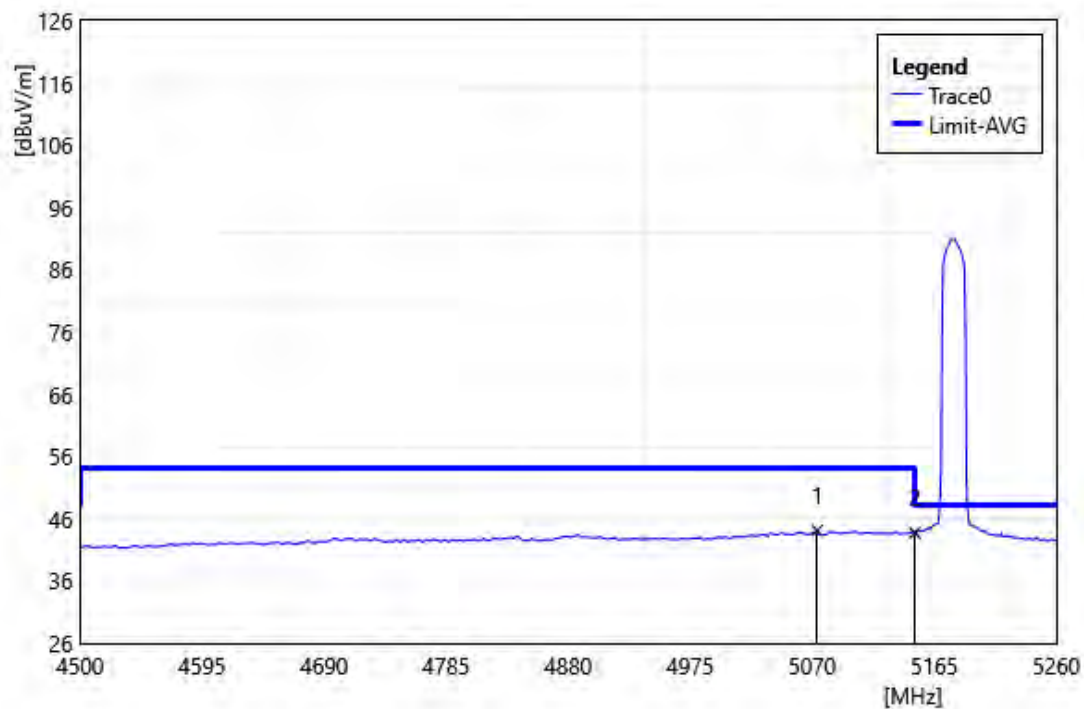


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5073.80          | 42.33           | 1.77                      | 44.10            | 54.00           | -9.90        | AVG    |
| 2  | 5150.00          | 42.18           | 1.56                      | 43.74            | 54.00           | -10.26       | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

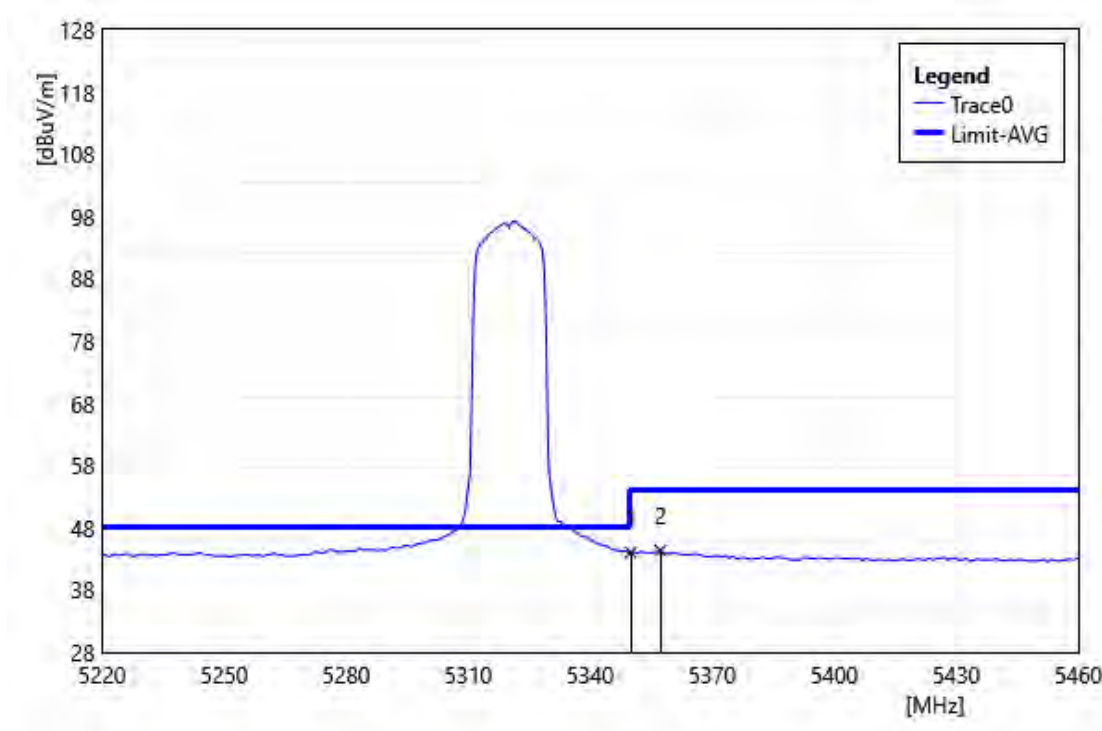


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 42.87           | 1.16                      | 44.03            | 54.00           | -9.97        | AVG    |
| 2  | 5357.28          | 43.14           | 1.20                      | 44.34            | 54.00           | -9.66        | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5320 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

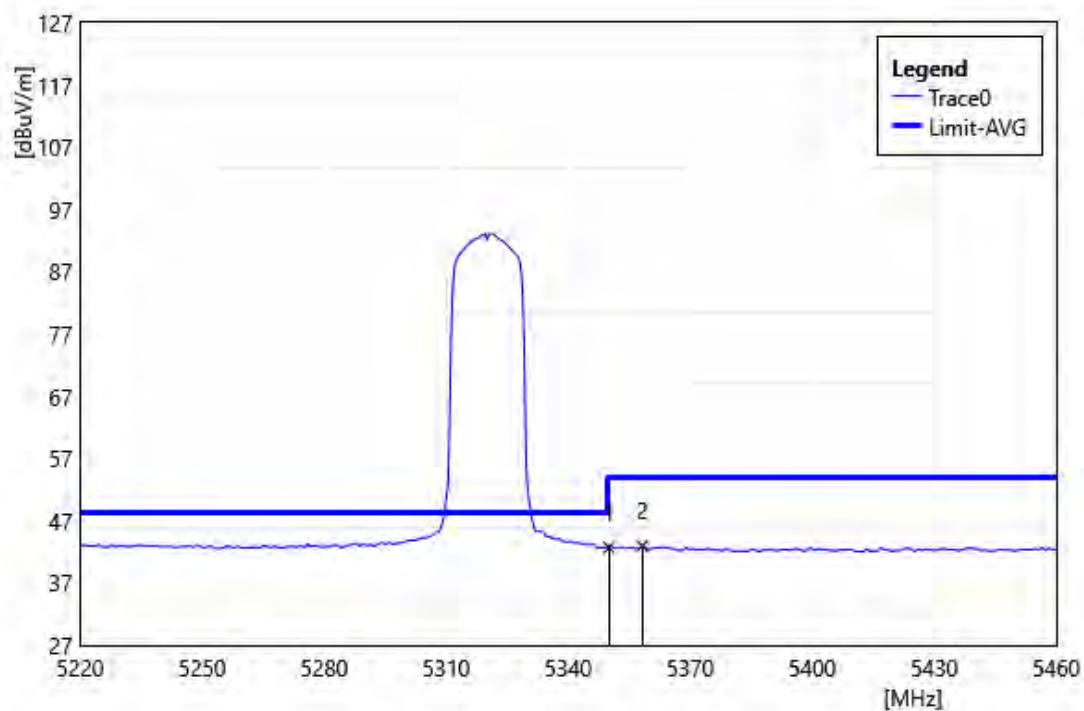


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 41.53           | 1.16                      | 42.69            | 54.00           | -11.31       | AVG    |
| 2  | 5358.24          | 41.79           | 1.20                      | 42.99            | 54.00           | -11.01       | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Horizontal       |           |             |
| Remark:       |                  |           |             |

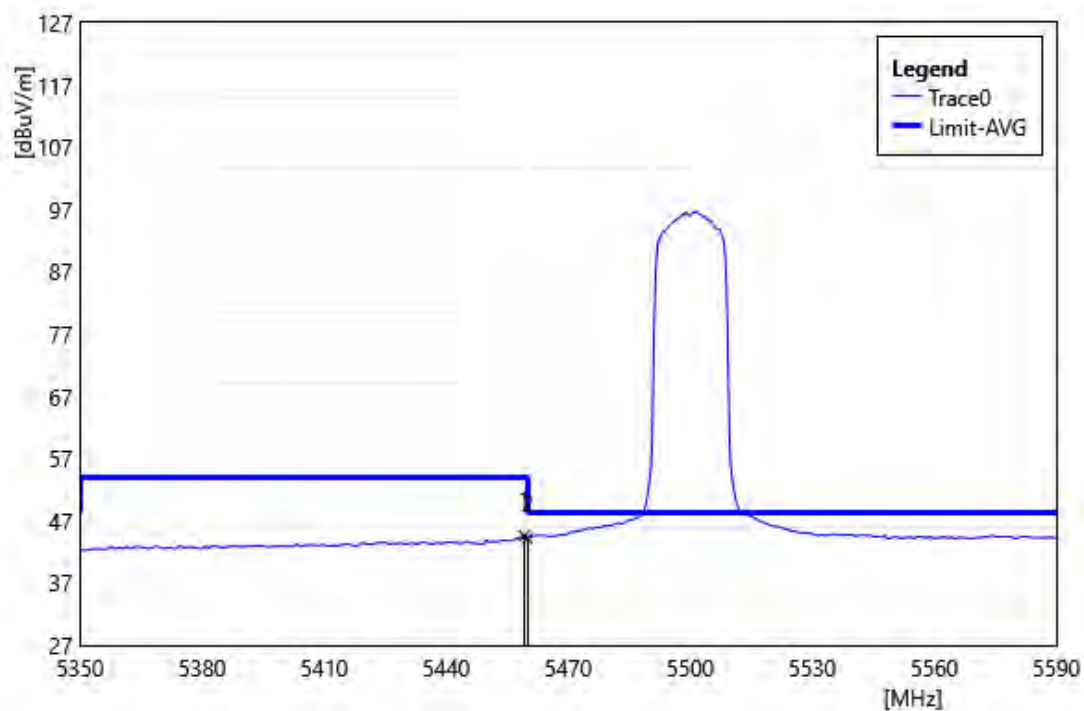


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5459.20          | 42.91           | 1.69                      | 44.60            | 54.00           | -9.40        | AVG    |
| 2  | 5460.00          | 42.46           | 1.69                      | 44.15            | 54.00           | -9.85        | AVG    |

|               |                  |           |             |
|---------------|------------------|-----------|-------------|
| Test Site:    | 96602 - WG       | Standard: | Part 15.407 |
| Test Mode:    | 802.11a 5500 MHz |           |             |
| Polarization: | Vertical         |           |             |
| Remark:       |                  |           |             |

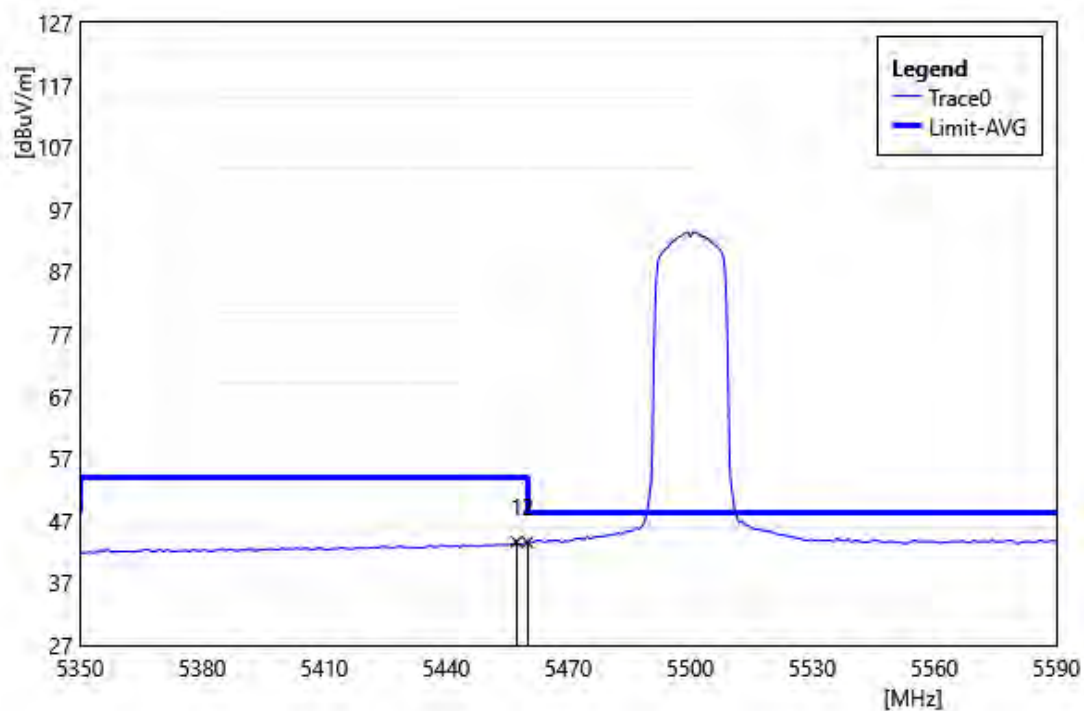


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5457.28          | 41.94           | 1.68                      | 43.62            | 54.00           | -10.38       | AVG    |
| 2  | 5460.00          | 41.86           | 1.69                      | 43.55            | 54.00           | -10.45       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

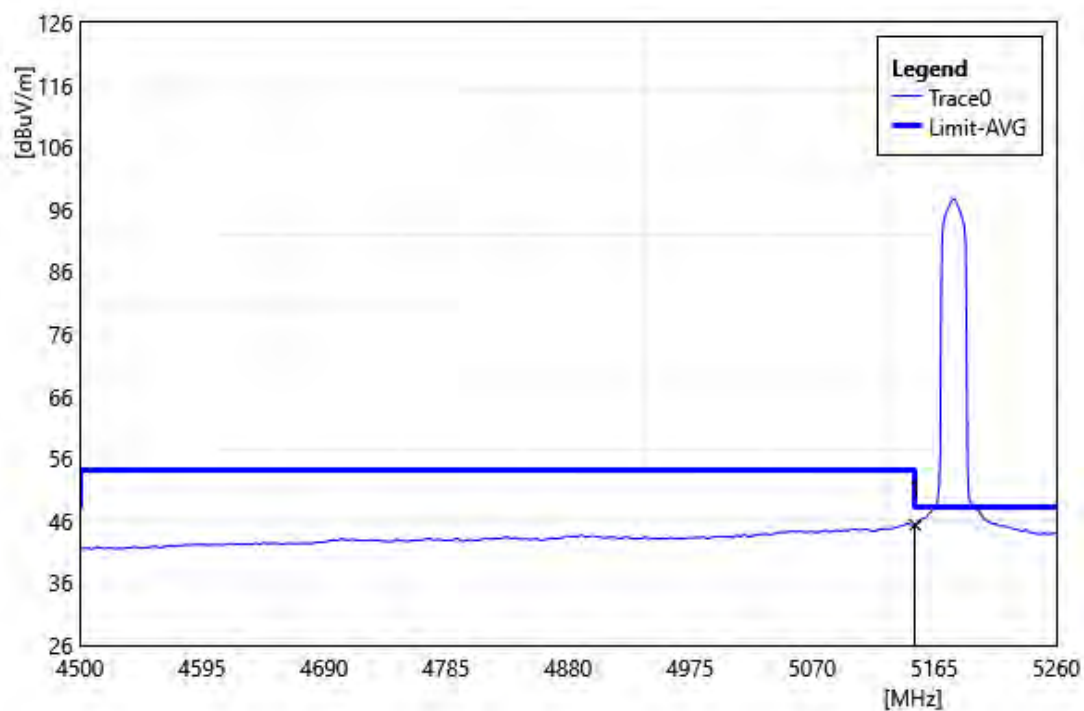


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5150.00          | 43.78           | 1.56                      | 45.34            | 54.00           | -8.66        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5180 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

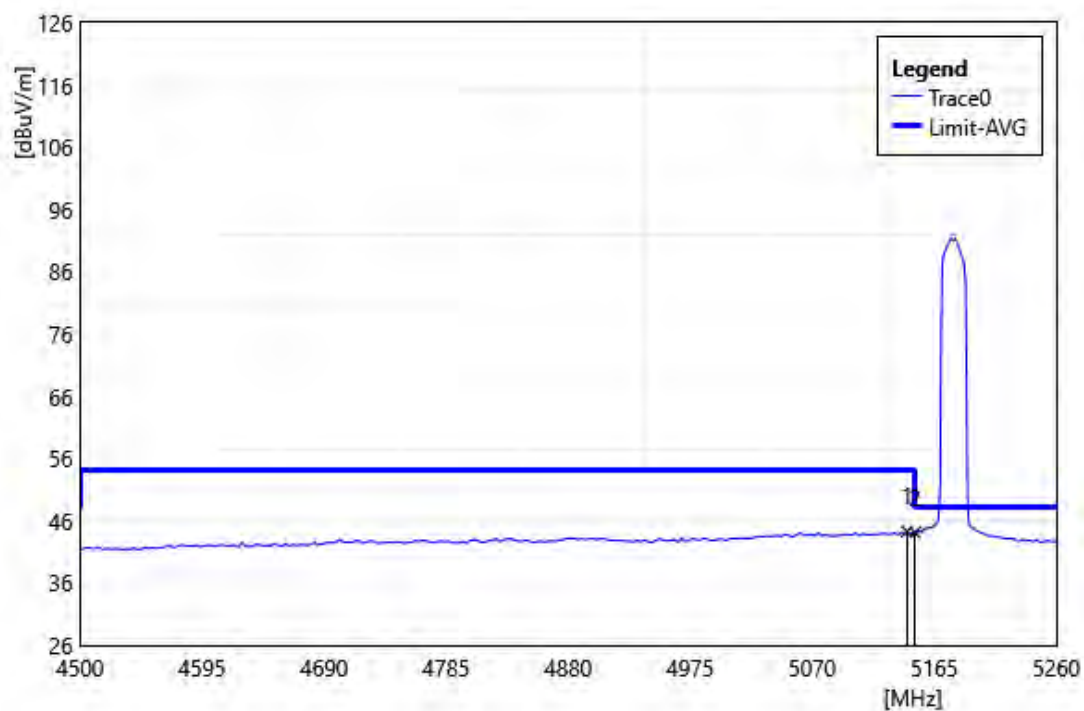


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5143.72          | 42.70           | 1.58                      | 44.28            | 54.00           | -9.72        | AVG    |
| 2  | 5150.00          | 42.55           | 1.56                      | 44.11            | 54.00           | -9.89        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

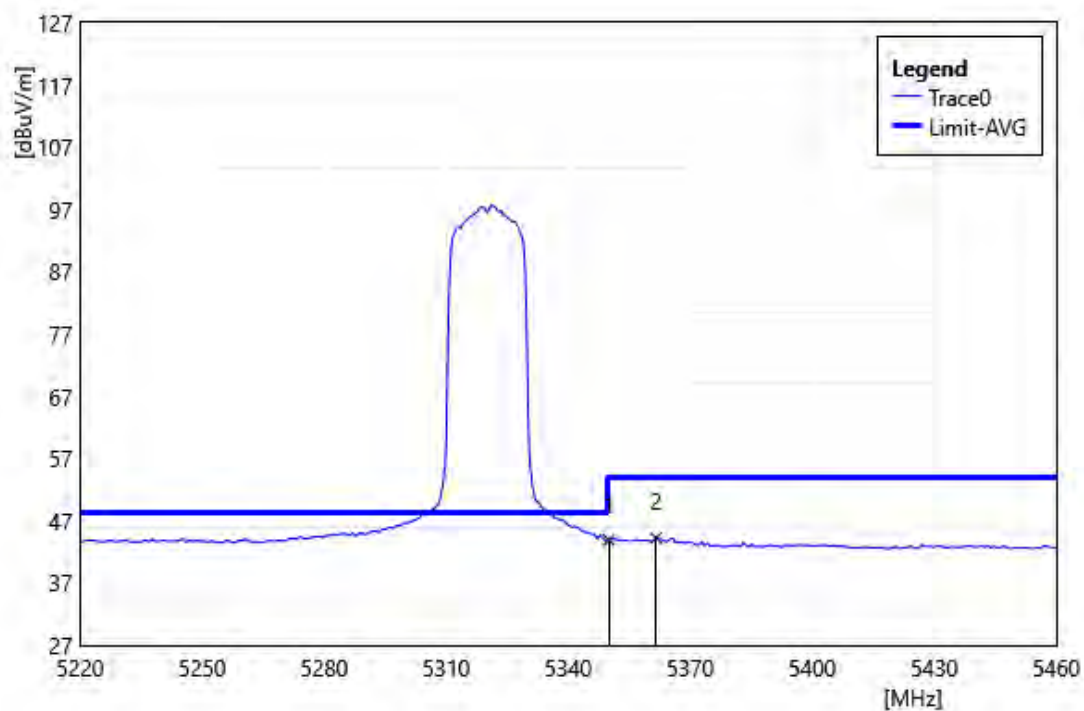


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 42.74           | 1.16                      | 43.90            | 54.00           | -10.10       | AVG    |
| 2  | 5361.60          | 43.00           | 1.23                      | 44.24            | 54.00           | -9.77        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5320 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

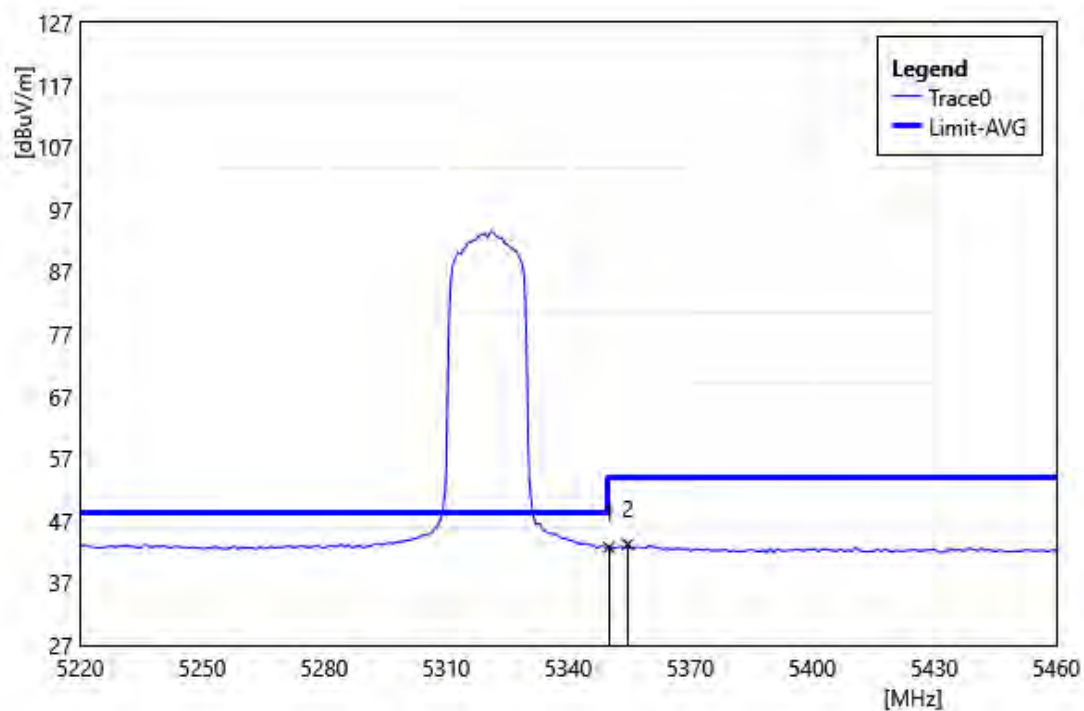


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 41.58           | 1.16                      | 42.74            | 54.00           | -11.26       | AVG    |
| 2  | 5354.64          | 42.04           | 1.18                      | 43.22            | 54.00           | -10.78       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

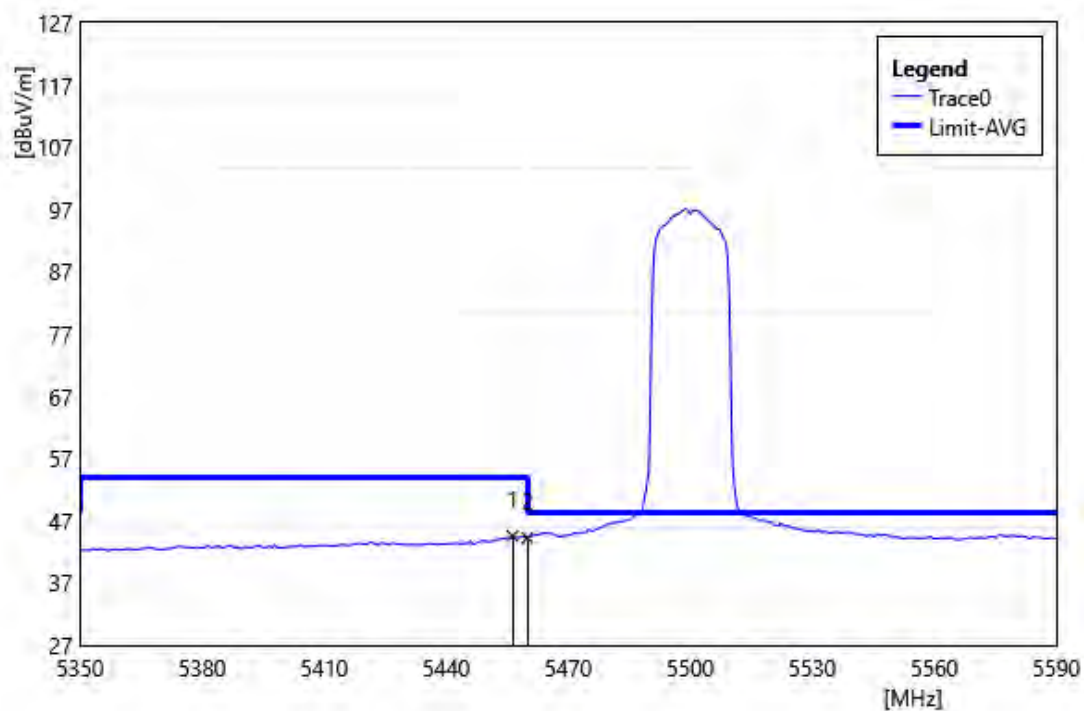


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5456.32          | 42.87           | 1.68                      | 44.55            | 54.00           | -9.45        | AVG    |
| 2  | 5460.00          | 42.56           | 1.69                      | 44.25            | 54.00           | -9.75        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT20 5500 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

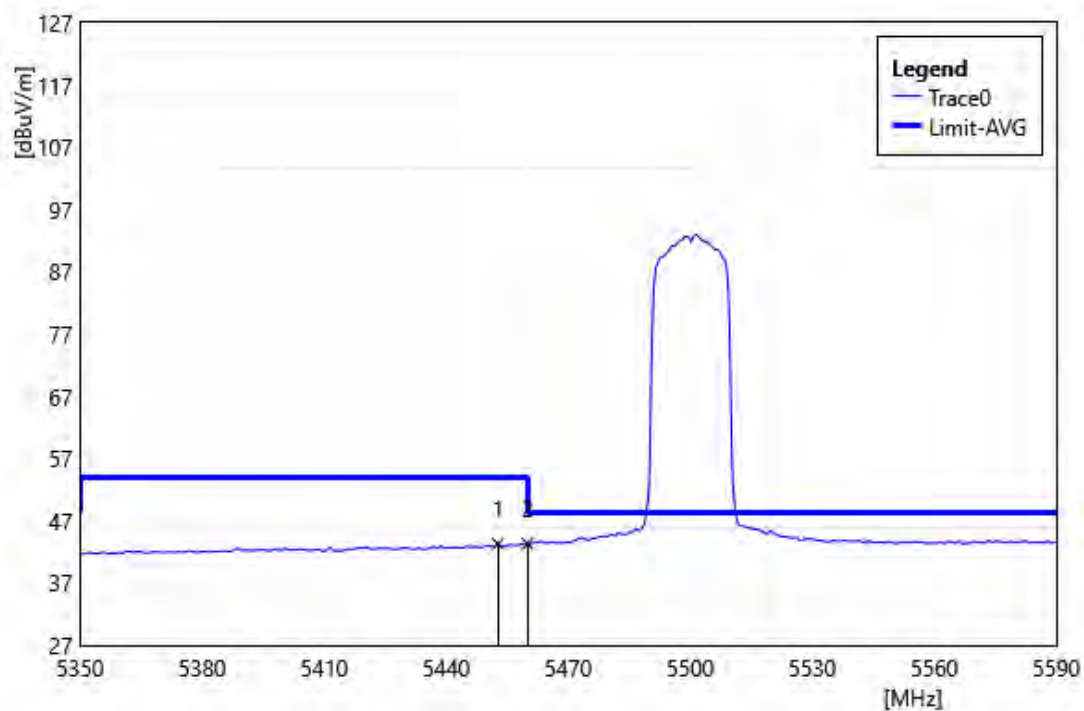


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5452.72          | 41.62           | 1.66                      | 43.28            | 54.00           | -10.72       | AVG    |
| 2  | 5460.00          | 41.61           | 1.69                      | 43.30            | 54.00           | -10.70       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

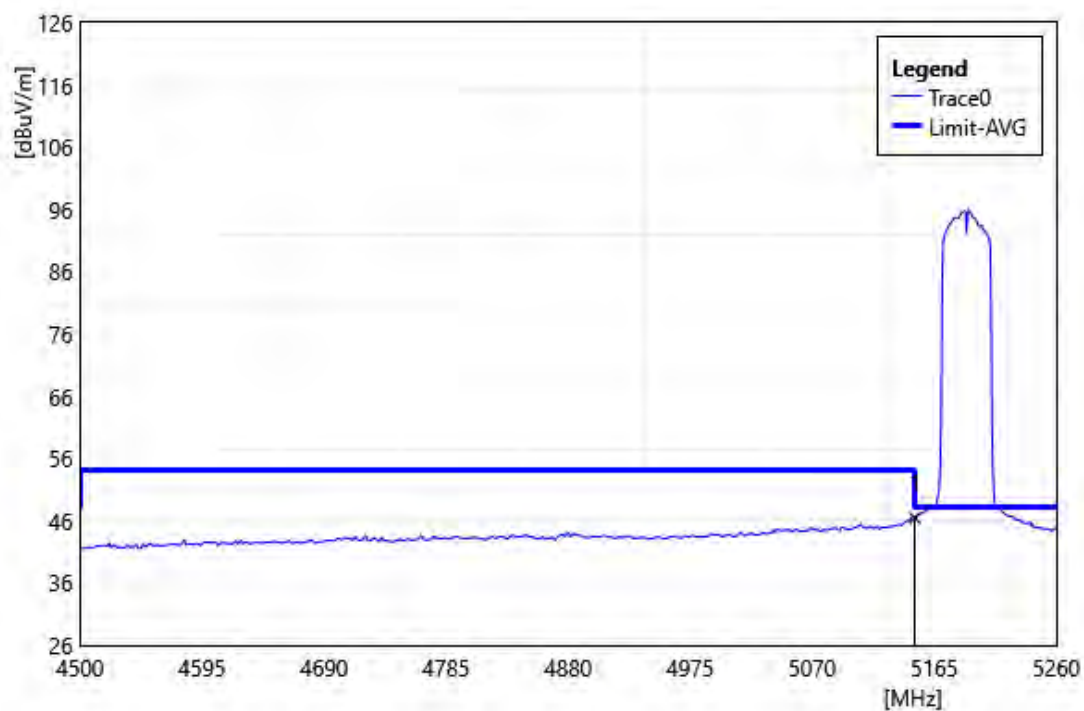


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5150.00          | 44.89           | 1.56                      | 46.45            | 54.00           | -7.55        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5190 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

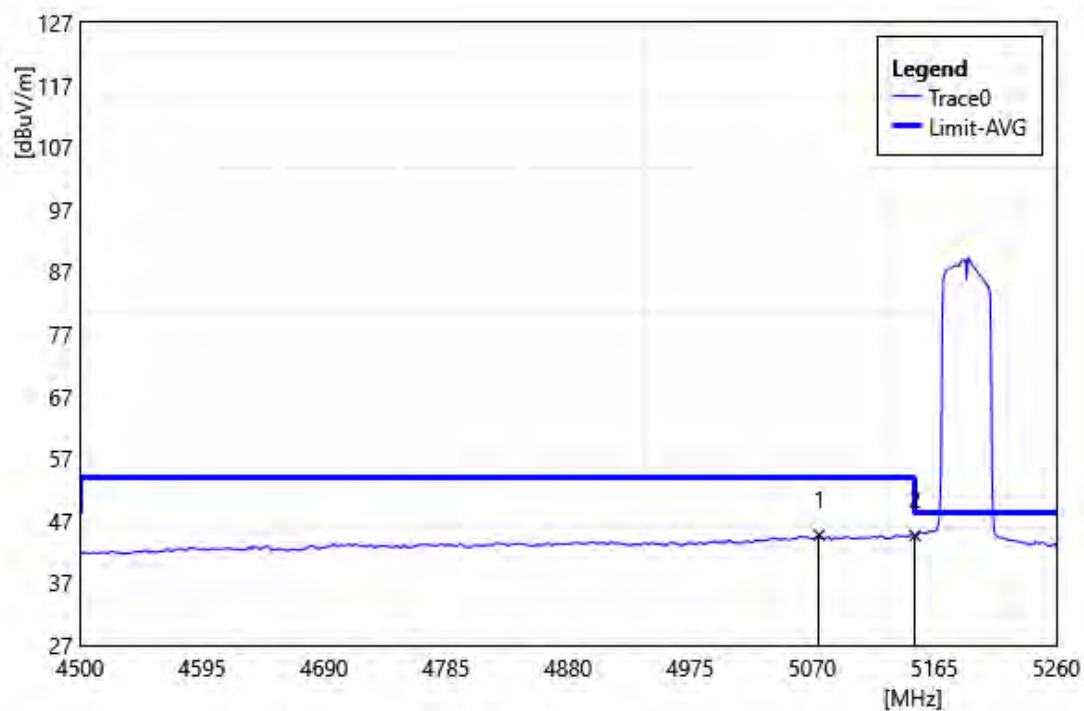


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5075.32          | 42.94           | 1.77                      | 44.71            | 54.00           | -9.30        | AVG    |
| 2  | 5150.00          | 43.07           | 1.56                      | 44.63            | 54.00           | -9.37        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

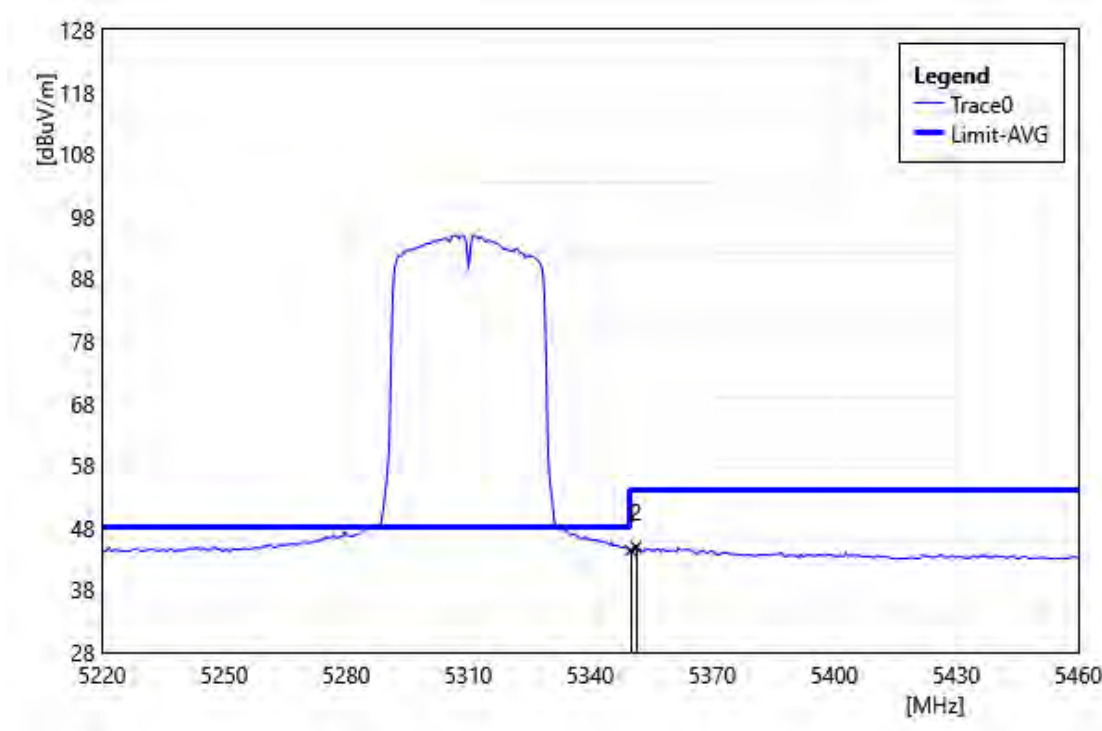


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 43.19           | 1.16                      | 44.35            | 54.00           | -9.65        | AVG    |
| 2  | 5351.28          | 43.72           | 1.17                      | 44.89            | 54.00           | -9.11        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5310 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

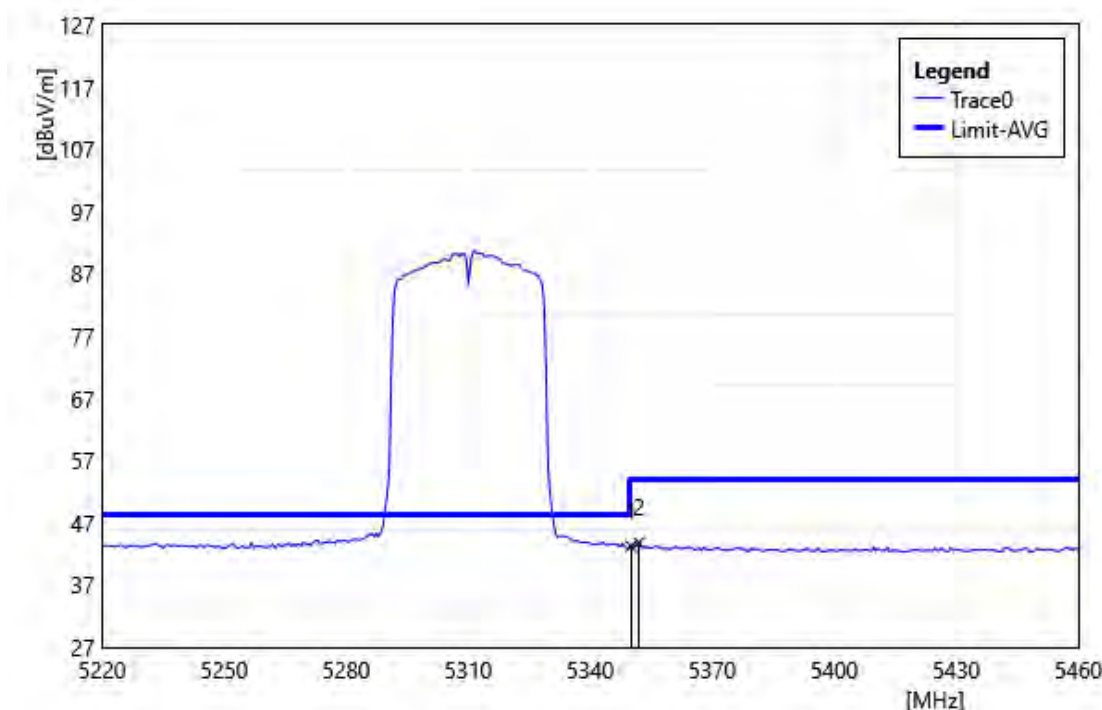


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 42.06           | 1.16                      | 43.22            | 54.00           | -10.78       | AVG    |
| 2  | 5352.00          | 42.62           | 1.17                      | 43.79            | 54.00           | -10.21       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

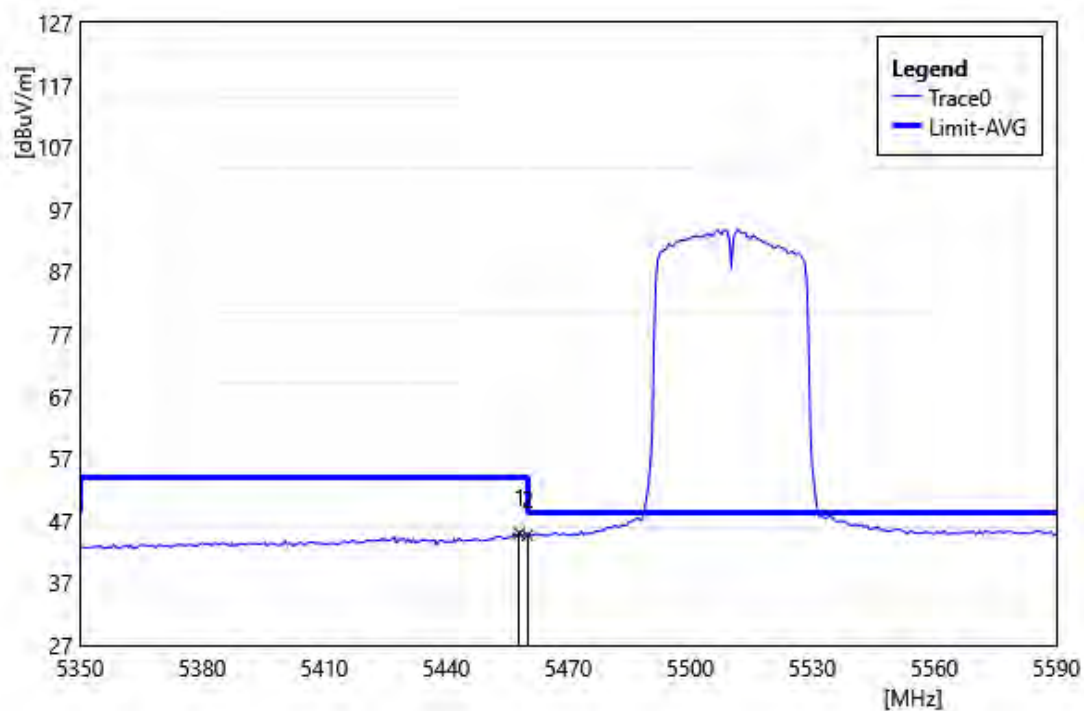


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.00          | 43.33           | 1.68                      | 45.01            | 54.00           | -8.99        | AVG    |
| 2  | 5460.00          | 42.99           | 1.69                      | 44.68            | 54.00           | -9.32        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT40 5510 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

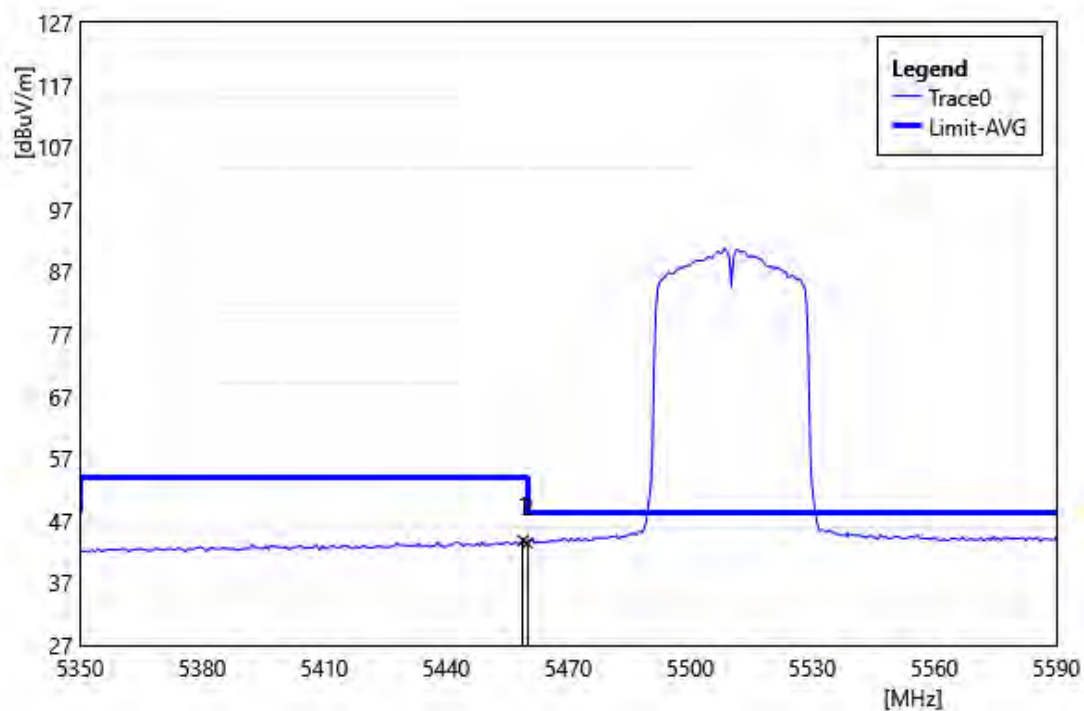


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.96          | 42.13           | 1.69                      | 43.82            | 54.00           | -10.18       | AVG    |
| 2  | 5460.00          | 41.72           | 1.69                      | 43.41            | 54.00           | -10.59       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

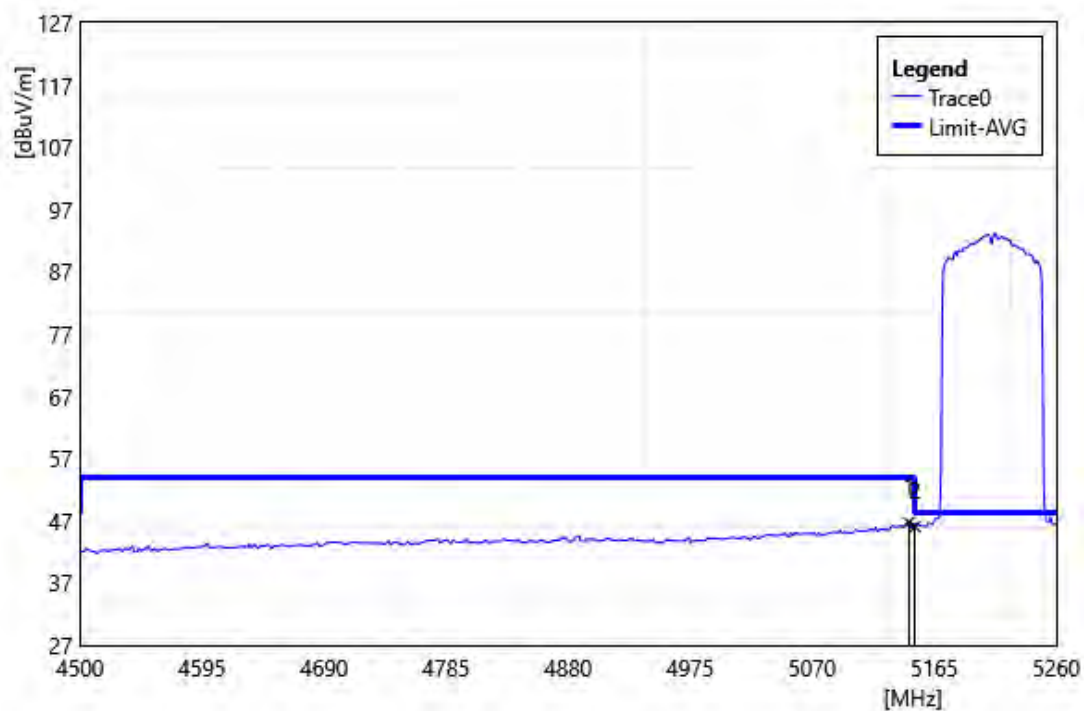


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5145.24          | 45.17           | 1.57                      | 46.74            | 54.00           | -7.26        | AVG    |
| 2  | 5150.00          | 44.48           | 1.56                      | 46.04            | 54.00           | -7.96        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5210 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

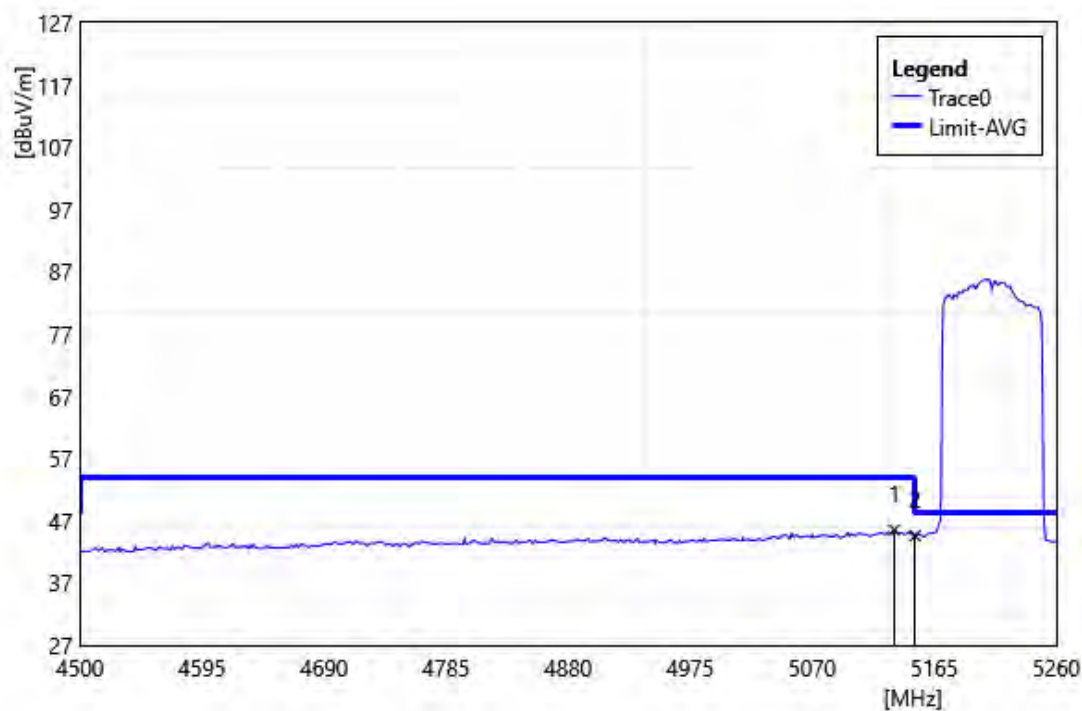


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5133.84          | 43.94           | 1.60                      | 45.54            | 54.00           | -8.46        | AVG    |
| 2  | 5150.00          | 43.02           | 1.56                      | 44.58            | 54.00           | -9.42        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

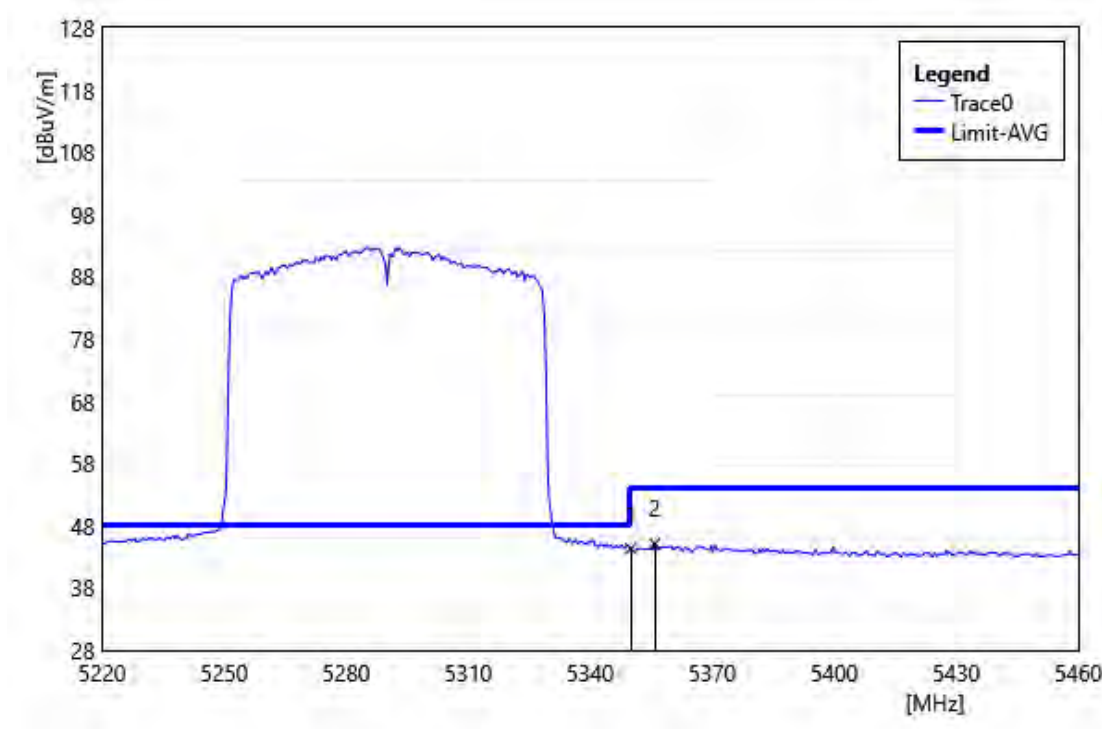


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 43.16           | 1.16                      | 44.32            | 54.00           | -9.68        | AVG    |
| 2  | 5355.84          | 43.93           | 1.19                      | 45.12            | 54.00           | -8.88        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5290 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

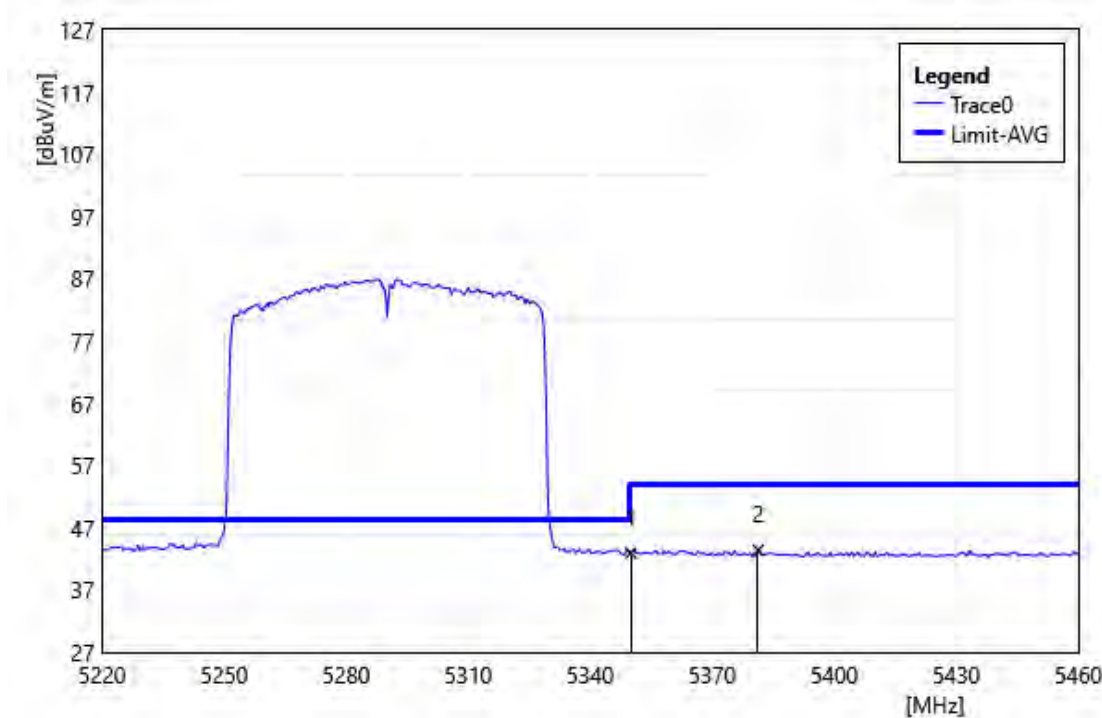


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 41.78           | 1.16                      | 42.94            | 54.00           | -11.06       | AVG    |
| 2  | 5381.28          | 42.08           | 1.34                      | 43.42            | 54.00           | -10.58       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

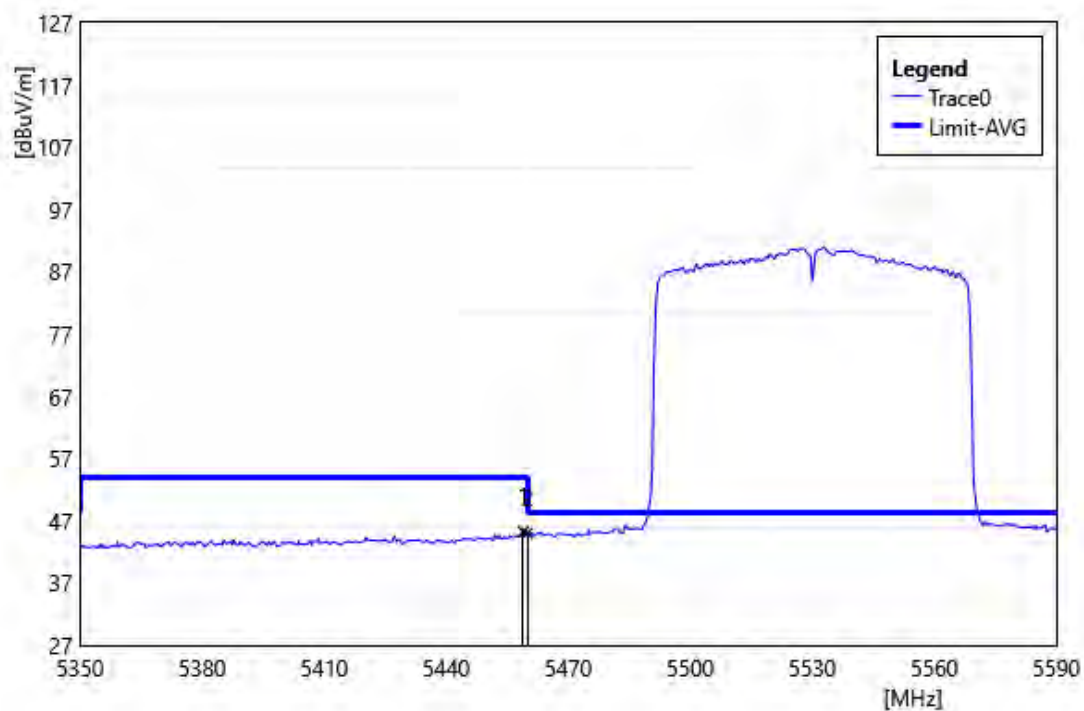


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.96          | 43.56           | 1.69                      | 45.25            | 54.00           | -8.75        | AVG    |
| 2  | 5460.00          | 43.29           | 1.69                      | 44.98            | 54.00           | -9.02        | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5530 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

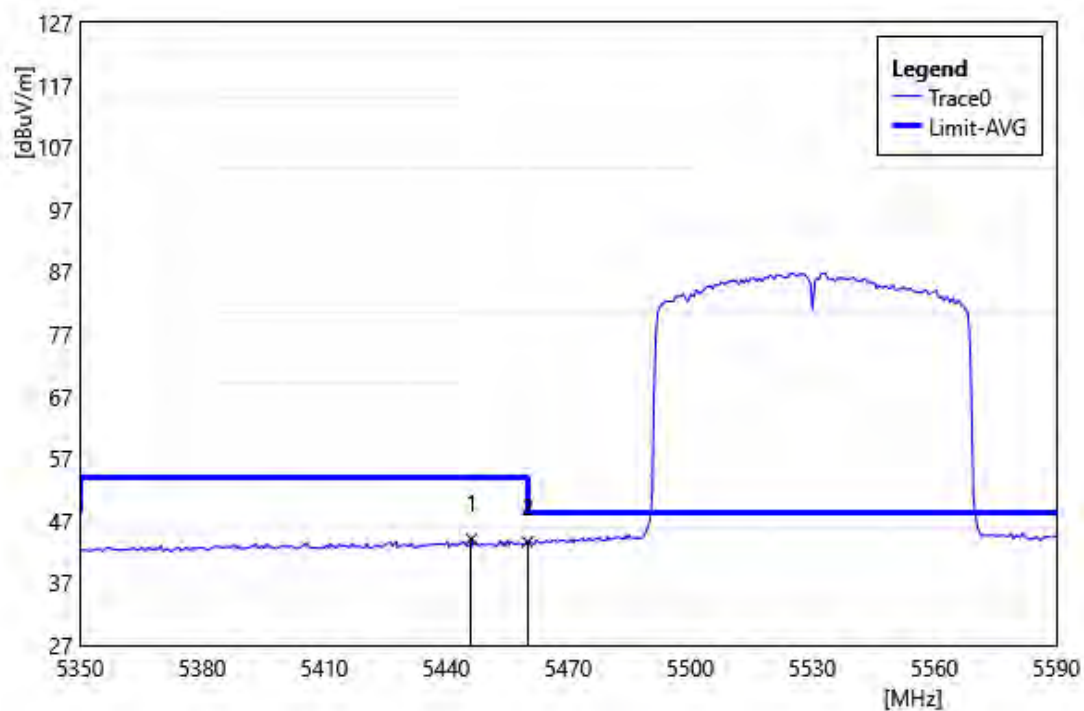


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5446.24          | 42.45           | 1.62                      | 44.07            | 54.00           | -9.93        | AVG    |
| 2  | 5460.00          | 41.89           | 1.69                      | 43.58            | 54.00           | -10.42       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Horizontal              |           |             |
| Remark:       |                         |           |             |

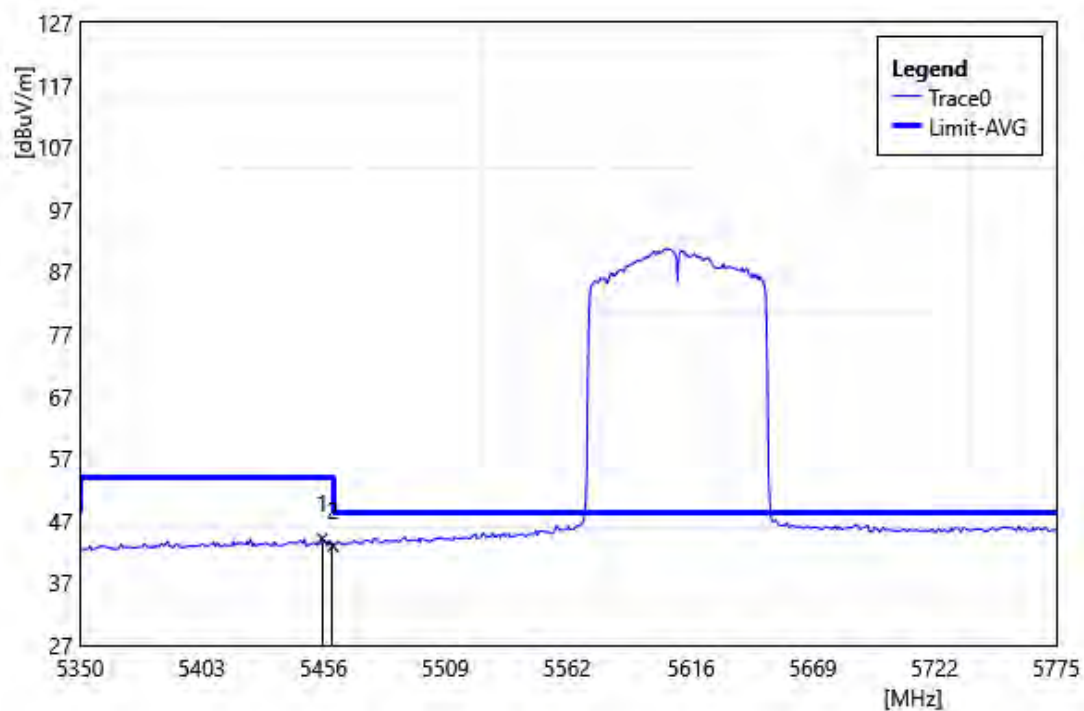


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5455.40          | 42.47           | 1.67                      | 44.14            | 54.00           | -9.86        | AVG    |
| 2  | 5460.00          | 41.25           | 1.69                      | 42.94            | 54.00           | -11.06       | AVG    |

|               |                         |           |             |
|---------------|-------------------------|-----------|-------------|
| Test Site:    | 96602 - WG              | Standard: | Part 15.407 |
| Test Mode:    | 802.11ac VHT80 5610 MHz |           |             |
| Polarization: | Vertical                |           |             |
| Remark:       |                         |           |             |

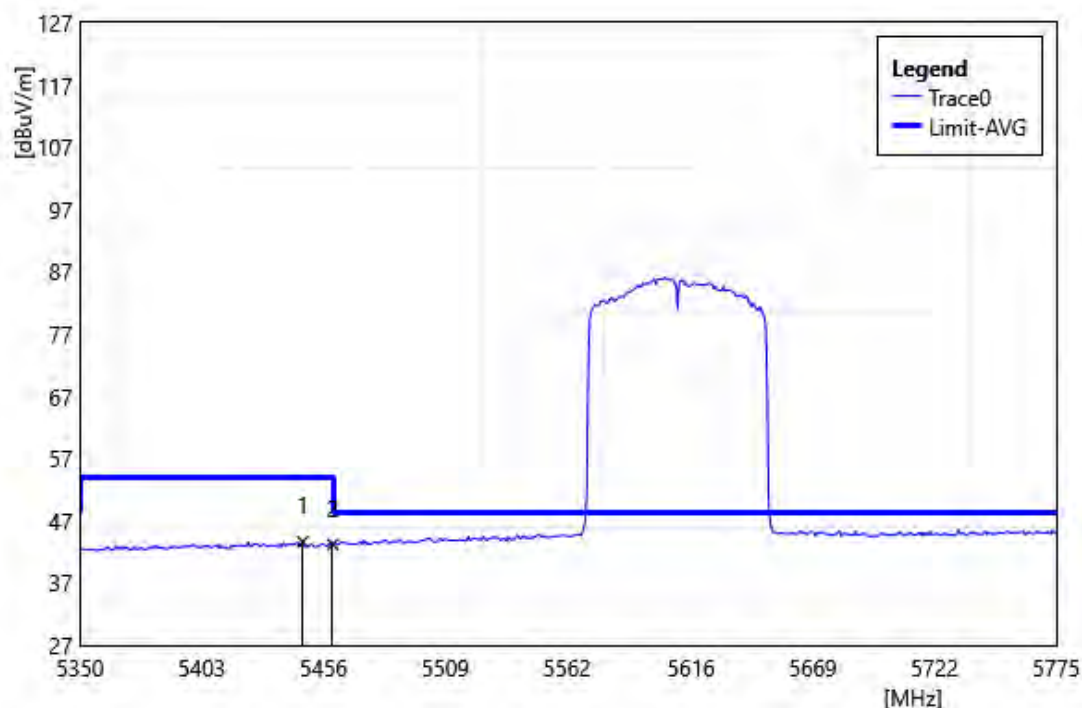


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5446.90          | 42.01           | 1.63                      | 43.64            | 54.00           | -10.36       | AVG    |
| 2  | 5460.00          | 41.51           | 1.69                      | 43.20            | 54.00           | -10.80       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

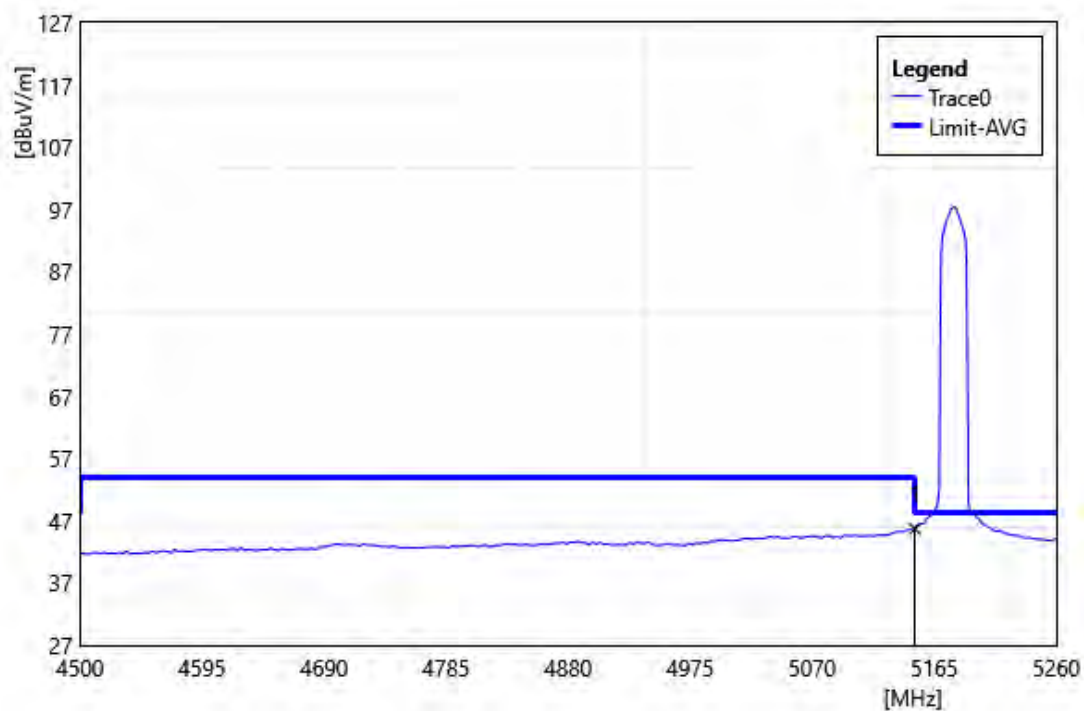


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5150.00          | 44.15           | 1.56                      | 45.71            | 54.00           | -8.29        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5180 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

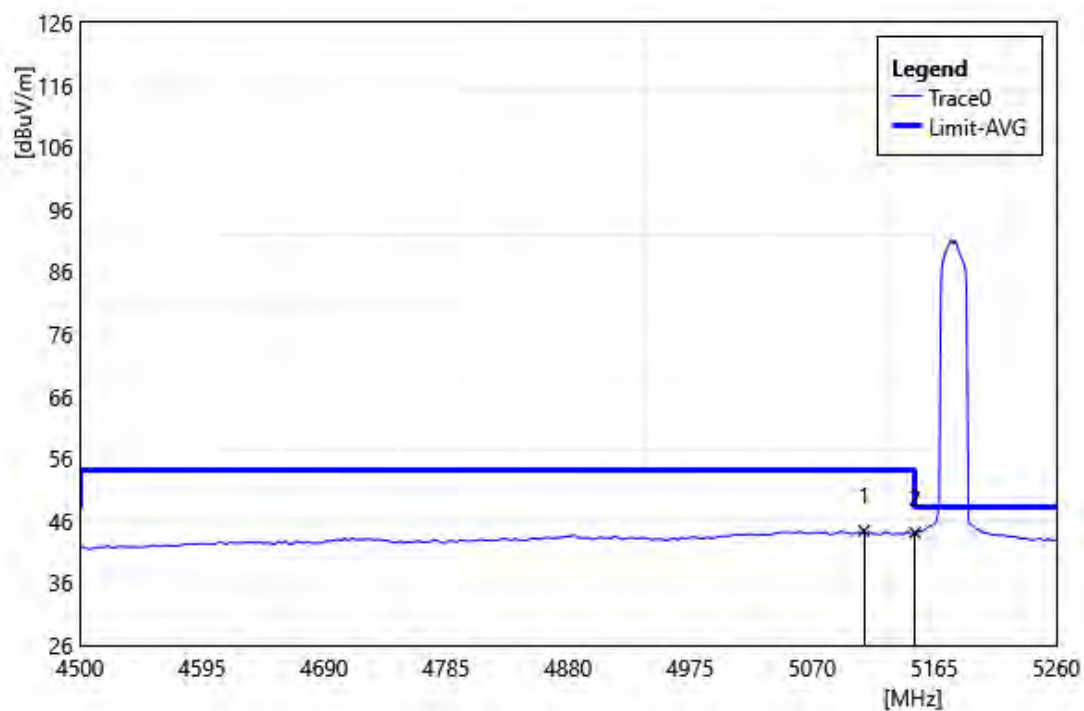


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5110.28          | 42.70           | 1.69                      | 44.39            | 54.00           | -9.61        | AVG    |
| 2  | 5150.00          | 42.52           | 1.56                      | 44.08            | 54.00           | -9.92        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

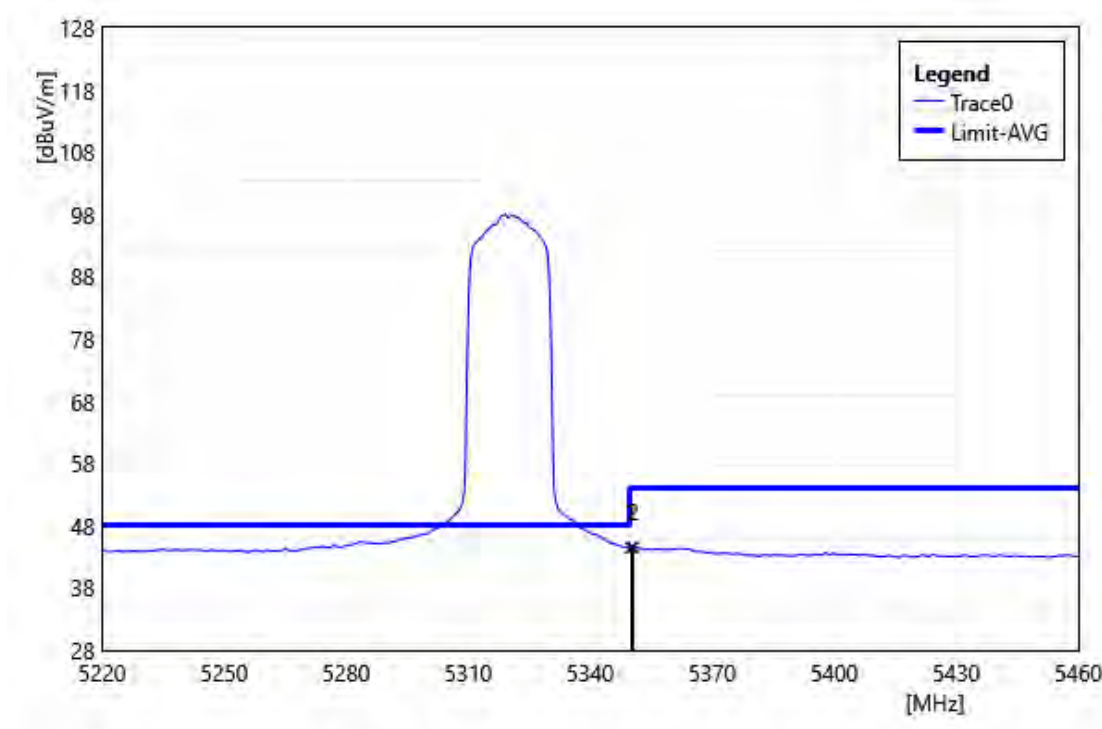


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 43.27           | 1.16                      | 44.43            | 54.00           | -9.57        | AVG    |
| 2  | 5350.56          | 43.39           | 1.16                      | 44.55            | 54.00           | -9.45        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5320 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

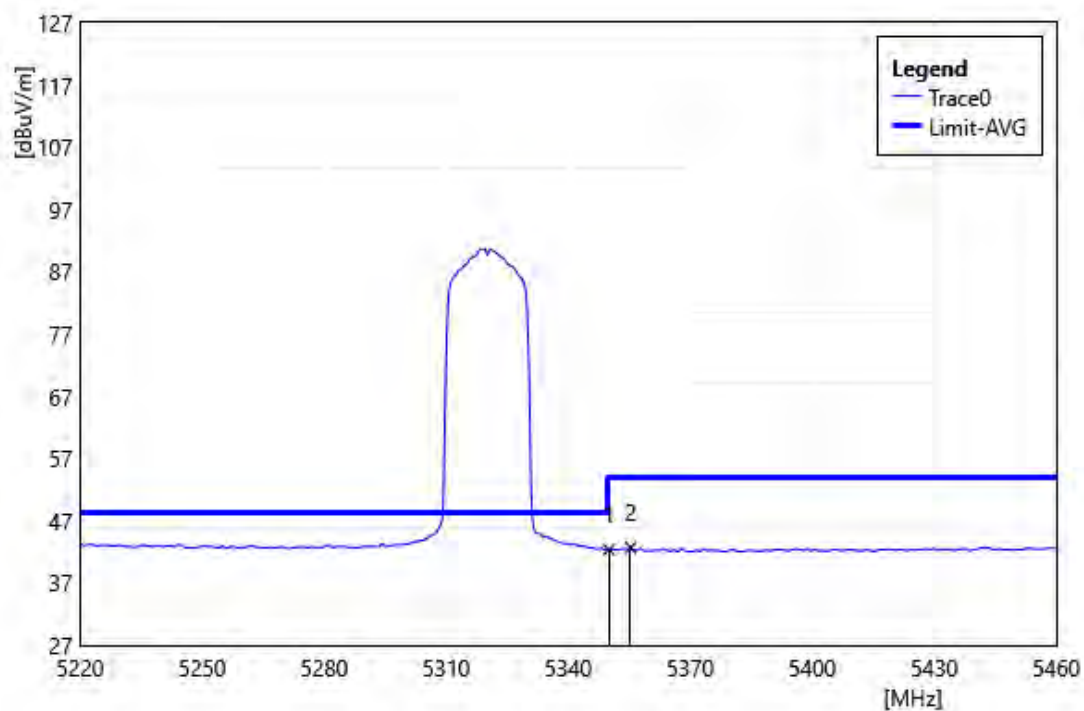


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 41.21           | 1.16                      | 42.37            | 54.00           | -11.63       | AVG    |
| 2  | 5355.36          | 41.49           | 1.19                      | 42.68            | 54.00           | -11.32       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

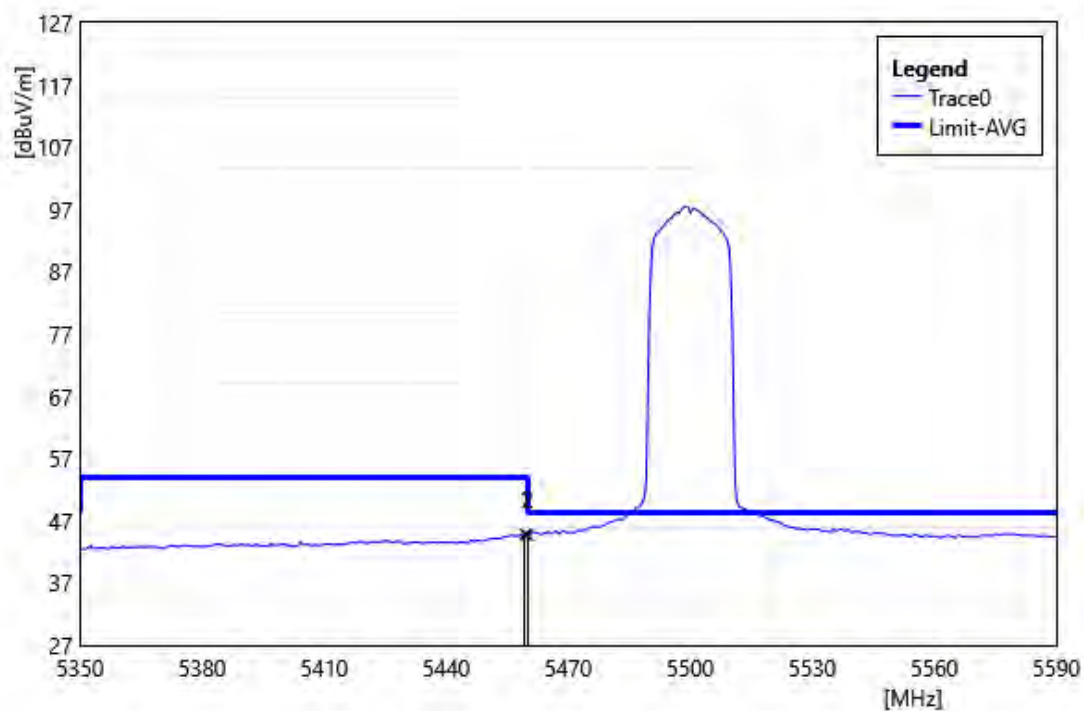


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5459.44          | 43.14           | 1.69                      | 44.83            | 54.00           | -9.17        | AVG    |
| 2  | 5460.00          | 43.00           | 1.69                      | 44.69            | 54.00           | -9.31        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE20 5500 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

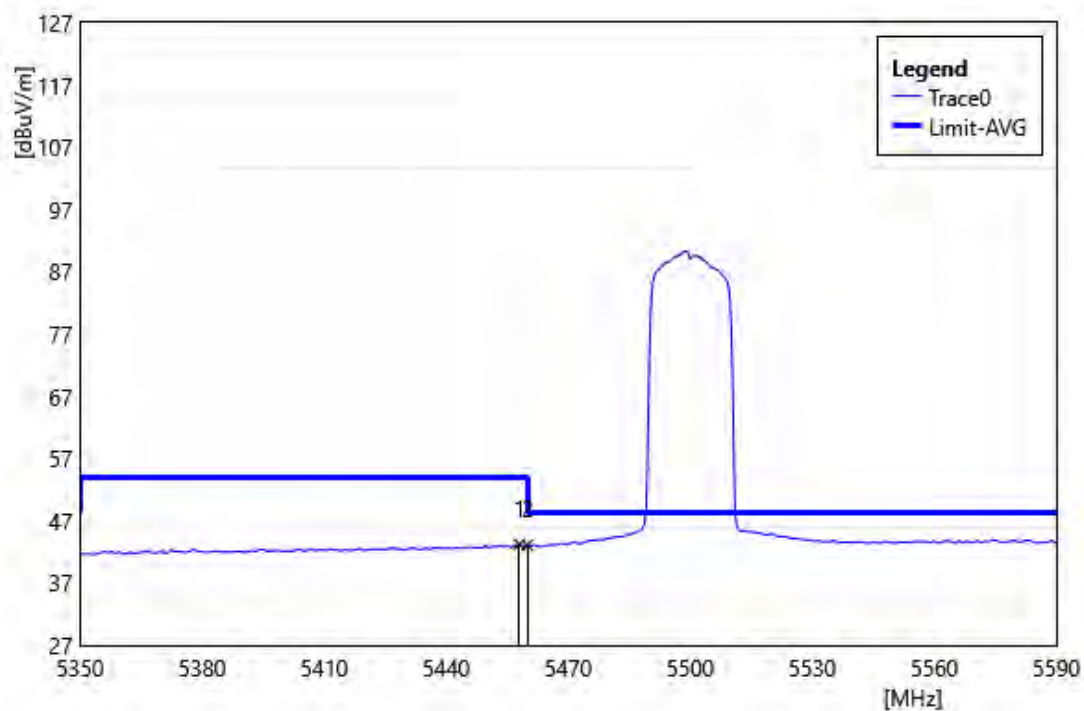


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.00          | 41.53           | 1.68                      | 43.21            | 54.00           | -10.79       | AVG    |
| 2  | 5460.00          | 41.38           | 1.69                      | 43.07            | 54.00           | -10.93       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

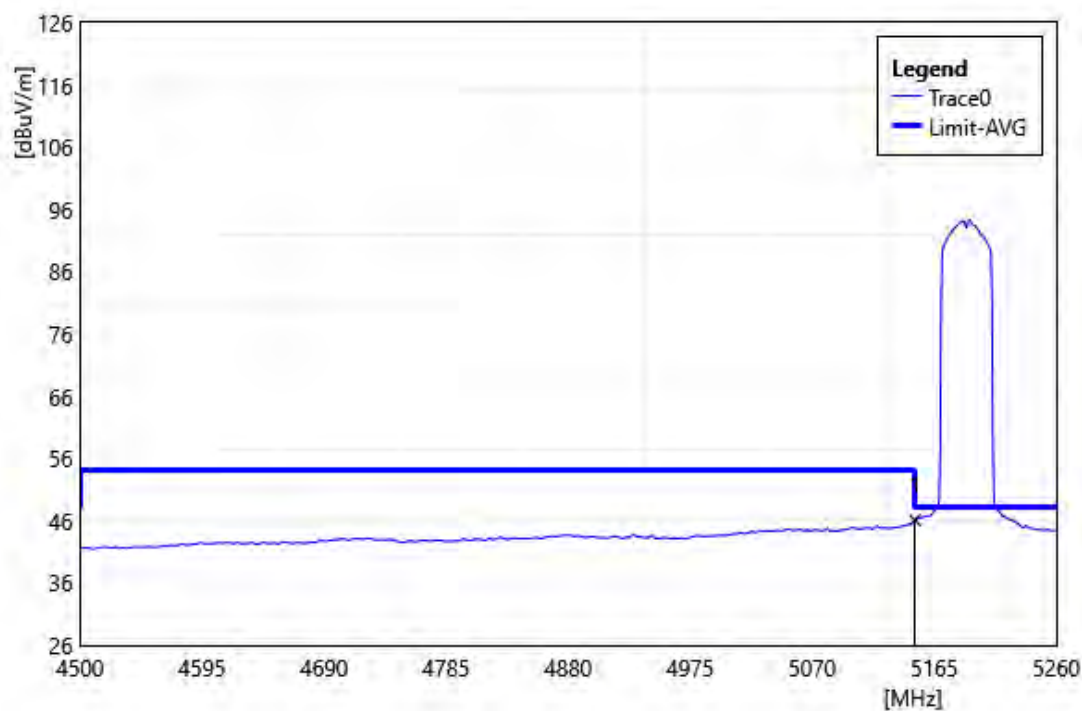


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5150.00          | 44.56           | 1.56                      | 46.12            | 54.00           | -7.88        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5190 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

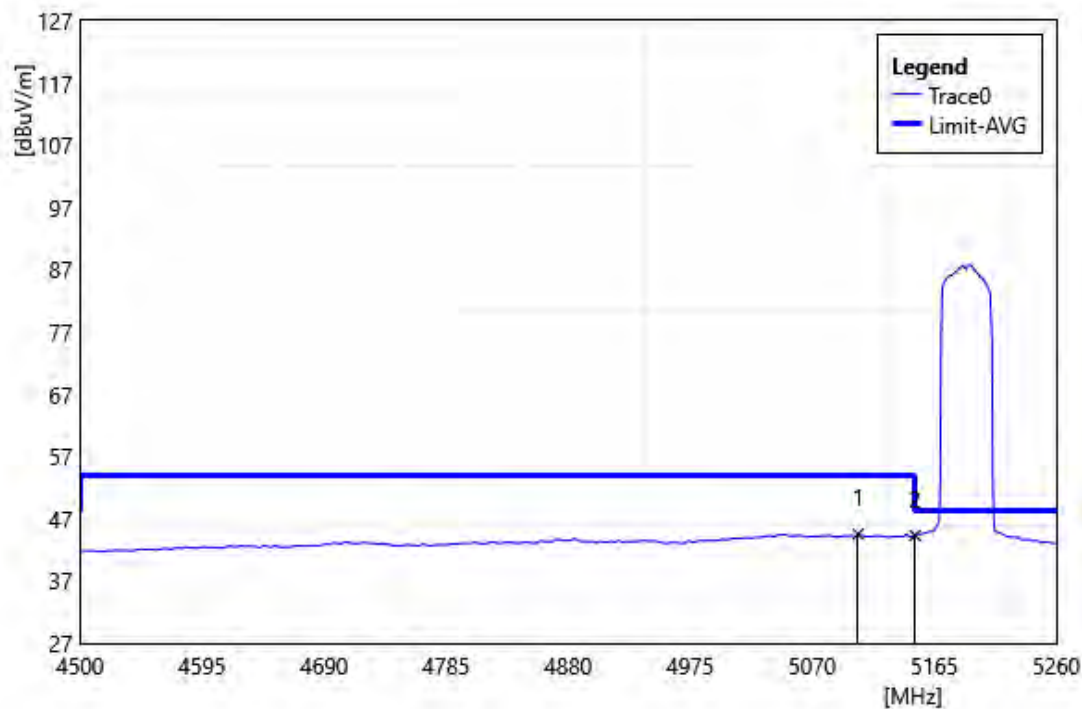


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5105.72          | 42.83           | 1.70                      | 44.53            | 54.00           | -9.47        | AVG    |
| 2  | 5150.00          | 42.76           | 1.56                      | 44.32            | 54.00           | -9.68        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

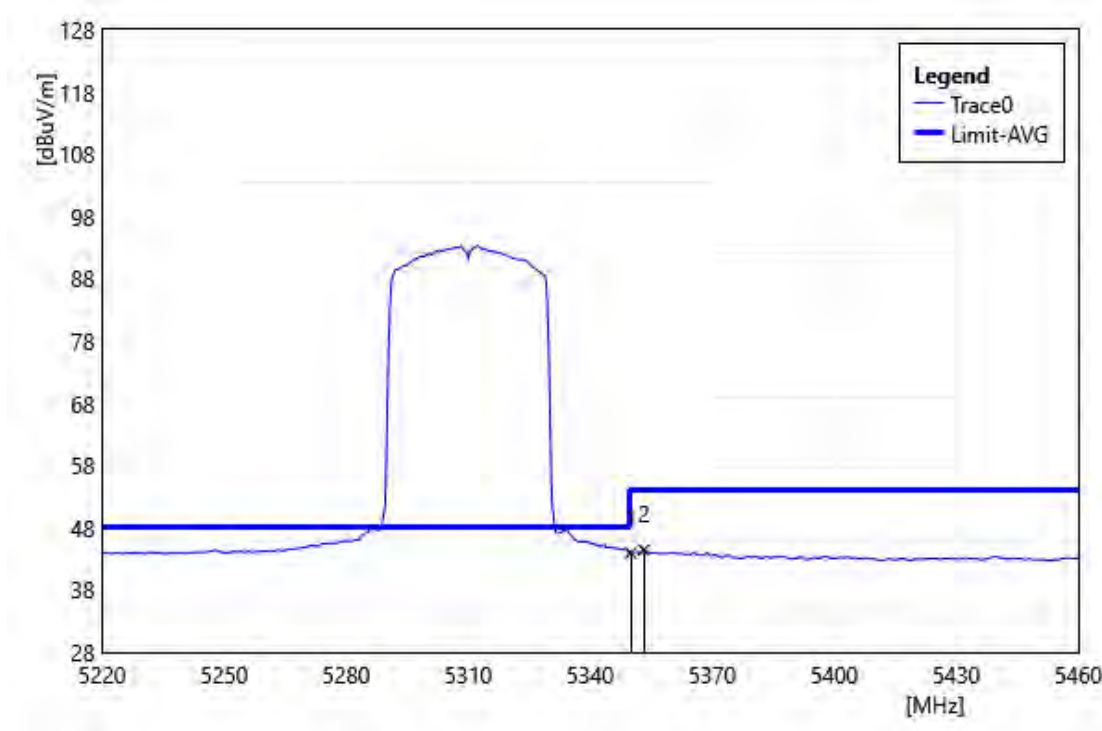


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 42.78           | 1.16                      | 43.94            | 54.00           | -10.06       | AVG    |
| 2  | 5353.20          | 43.29           | 1.17                      | 44.46            | 54.00           | -9.54        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5310 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

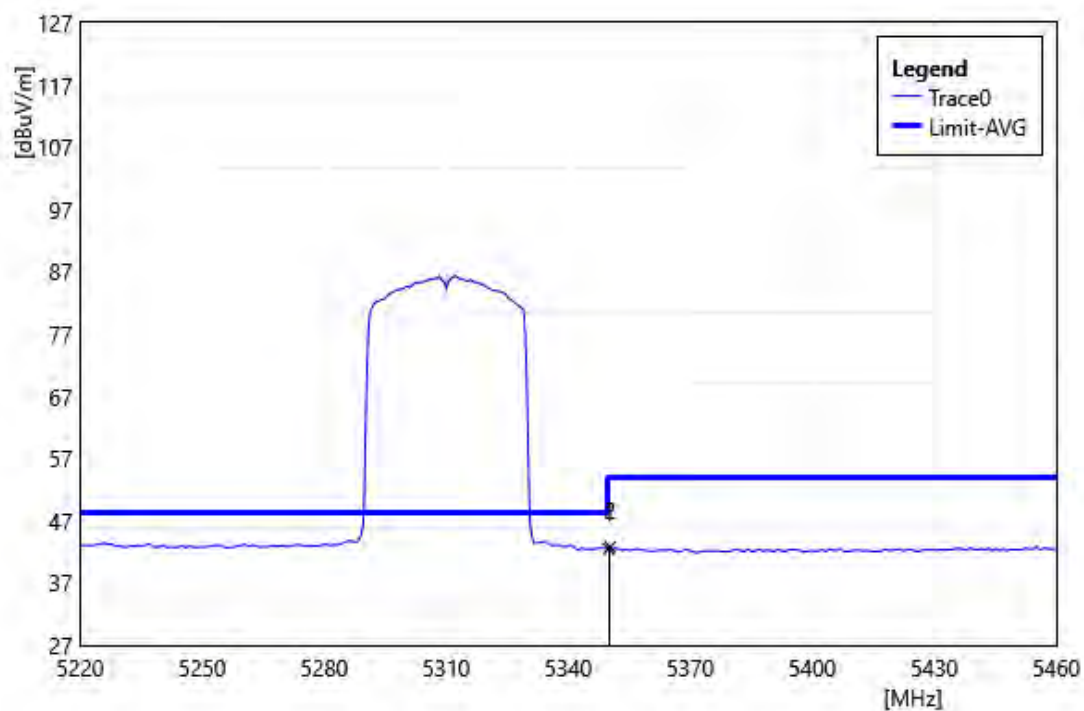


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 41.32           | 1.16                      | 42.48            | 54.00           | -11.52       | AVG    |
| 2  | 5350.32          | 41.64           | 1.16                      | 42.80            | 54.00           | -11.20       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

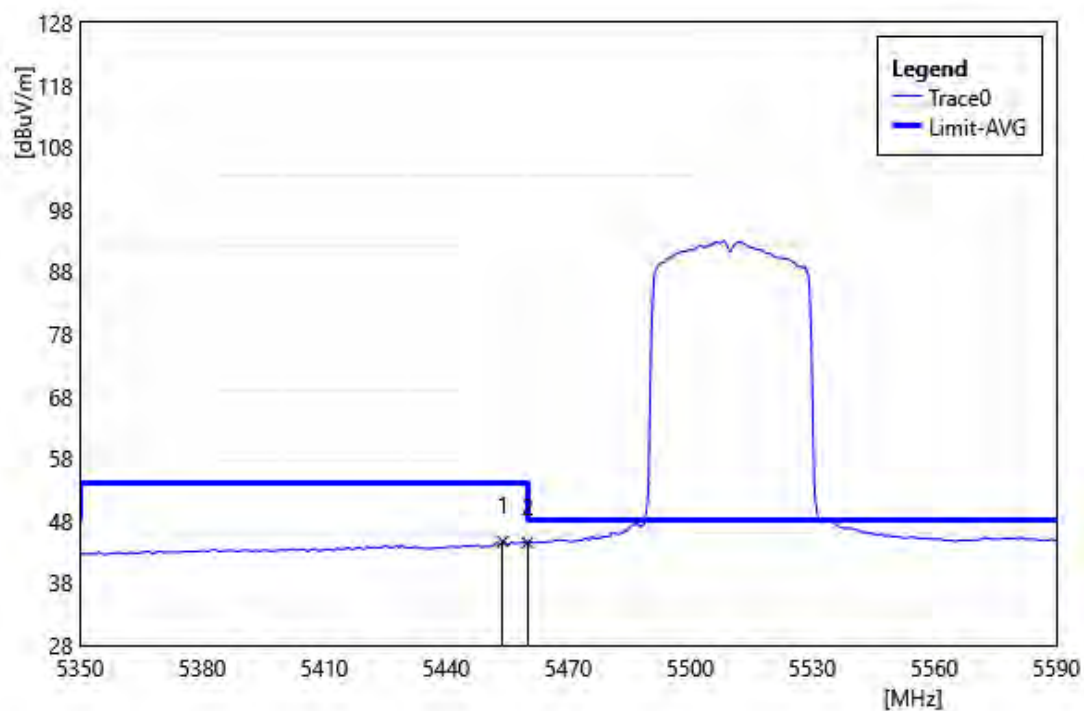


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5453.92          | 42.99           | 1.67                      | 44.66            | 54.00           | -9.34        | AVG    |
| 2  | 5460.00          | 42.78           | 1.69                      | 44.47            | 54.00           | -9.53        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE40 5510 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

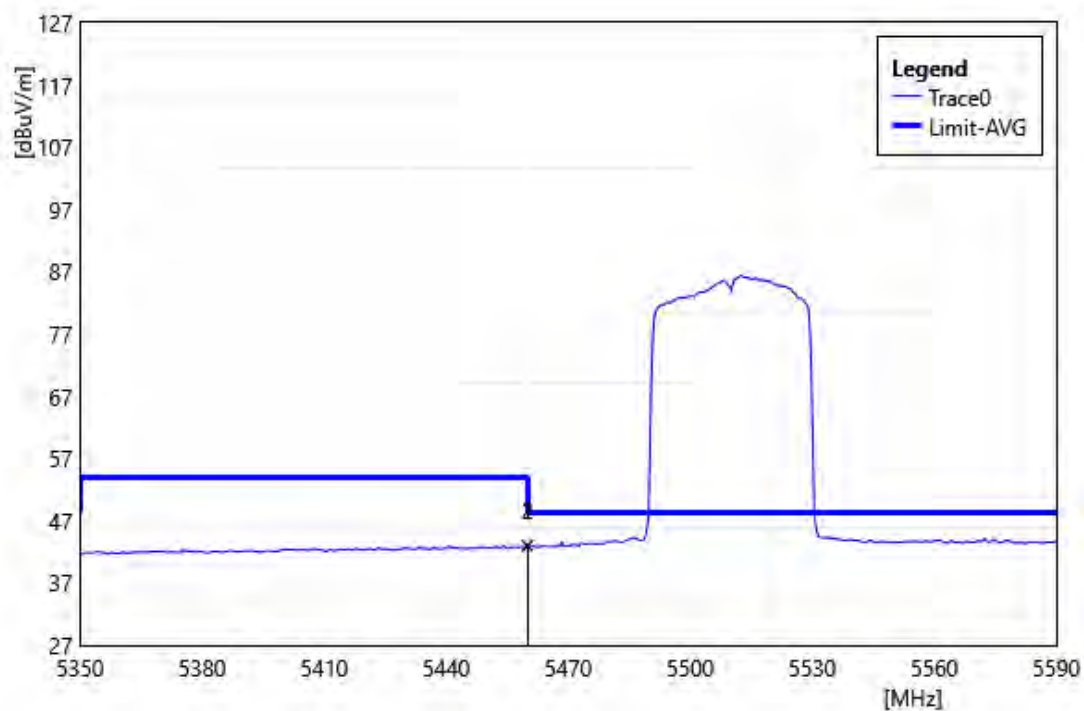


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5459.92          | 41.34           | 1.69                      | 43.03            | 54.00           | -10.97       | AVG    |
| 2  | 5460.00          | 41.29           | 1.69                      | 42.98            | 54.00           | -11.02       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

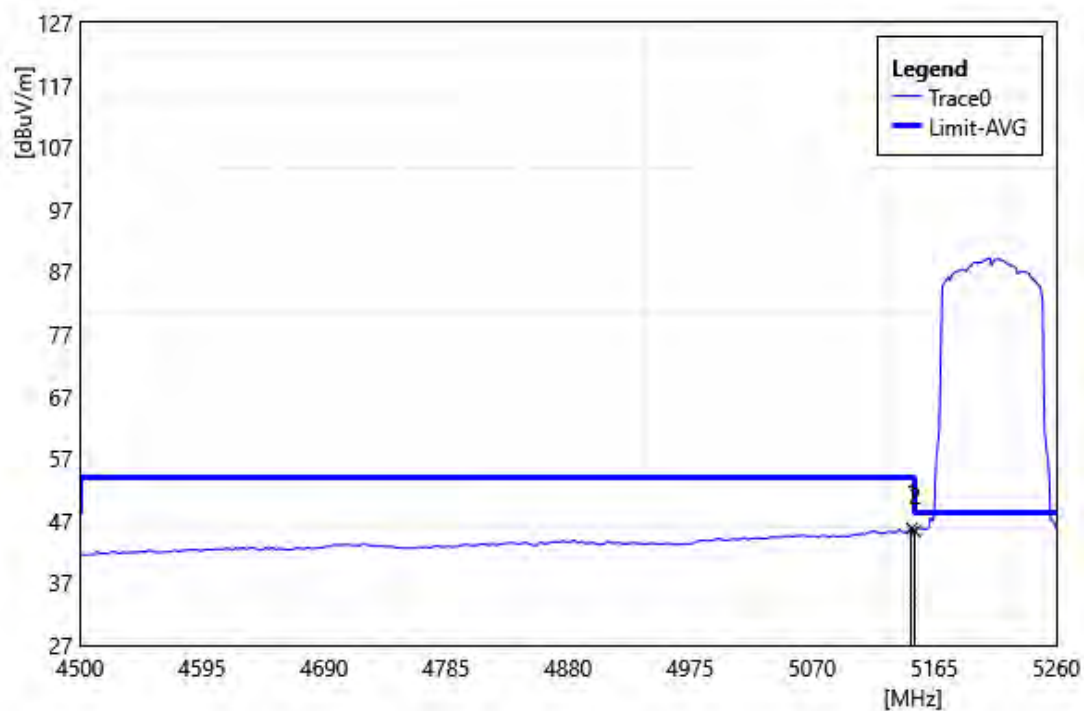


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5147.52          | 44.18           | 1.56                      | 45.74            | 54.00           | -8.26        | AVG    |
| 2  | 5150.00          | 43.77           | 1.56                      | 45.33            | 54.00           | -8.67        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5210 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

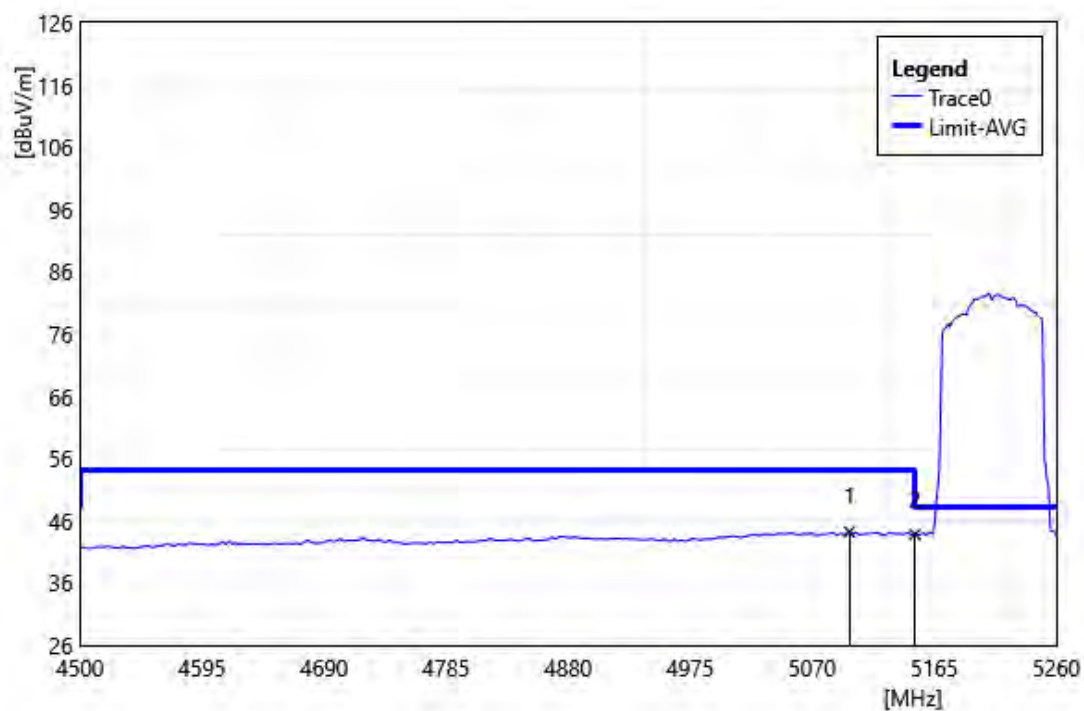


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5098.88          | 42.49           | 1.72                      | 44.21            | 54.00           | -9.79        | AVG    |
| 2  | 5150.00          | 42.24           | 1.56                      | 43.80            | 54.00           | -10.20       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

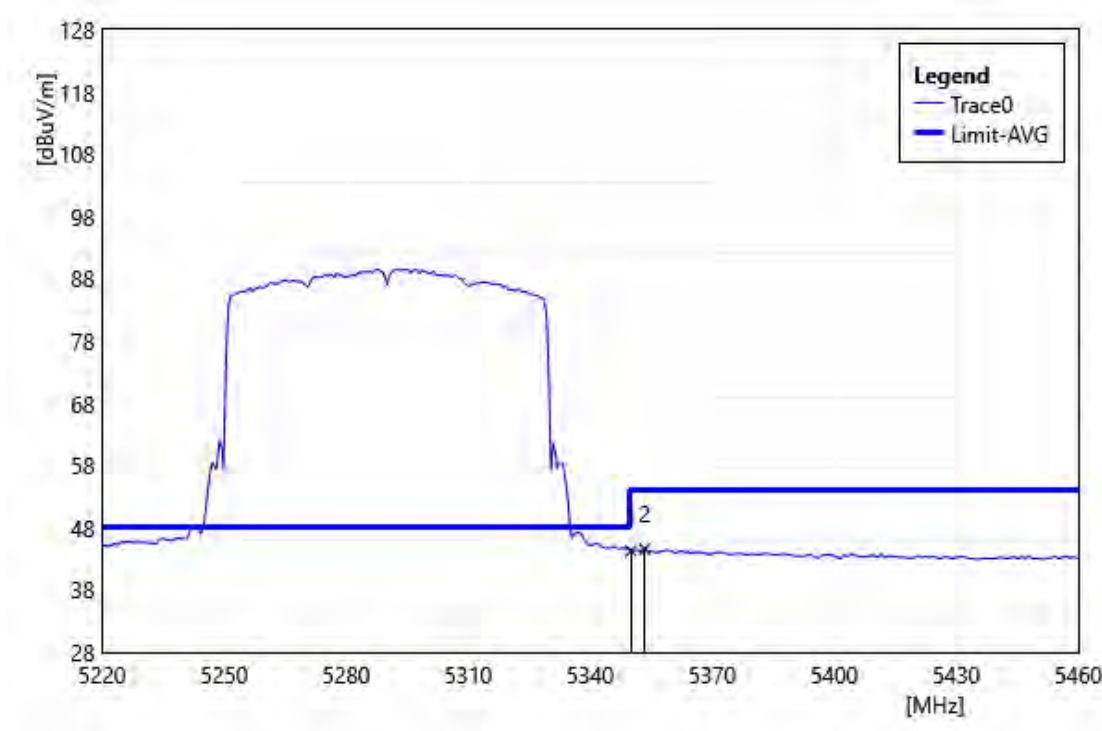


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 43.12           | 1.16                      | 44.28            | 54.00           | -9.72        | AVG    |
| 2  | 5353.44          | 43.41           | 1.17                      | 44.58            | 54.00           | -9.42        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5290 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

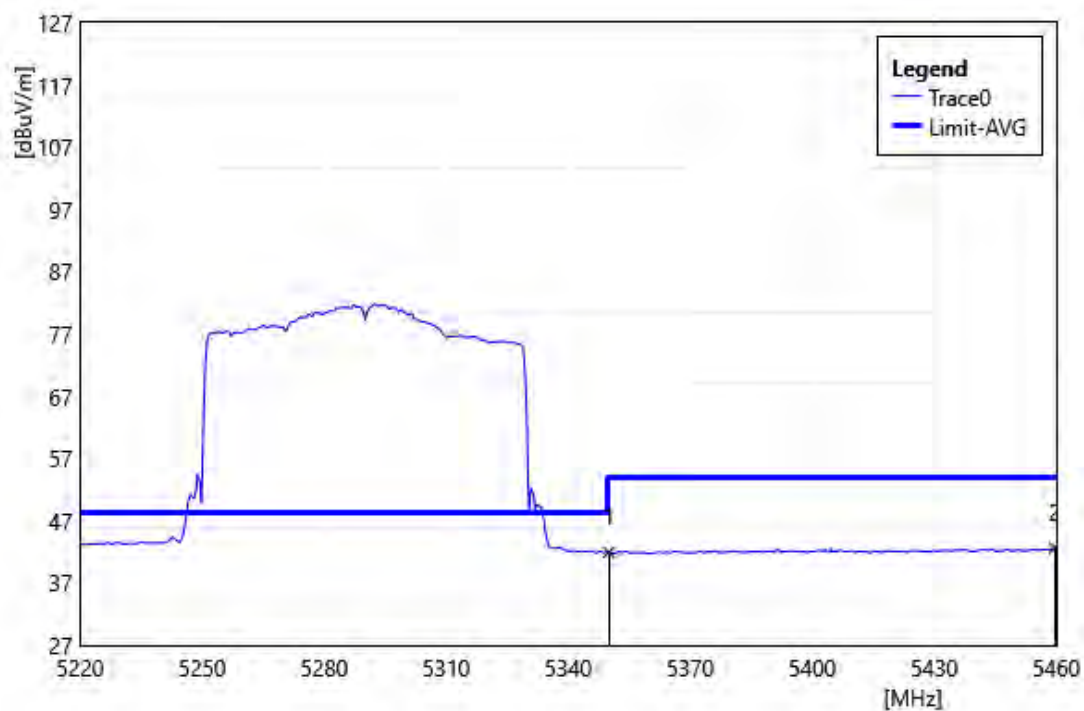


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5350.00          | 40.76           | 1.16                      | 41.92            | 54.00           | -12.08       | AVG    |
| 2  | 5459.52          | 41.00           | 1.69                      | 42.69            | 54.00           | -11.32       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

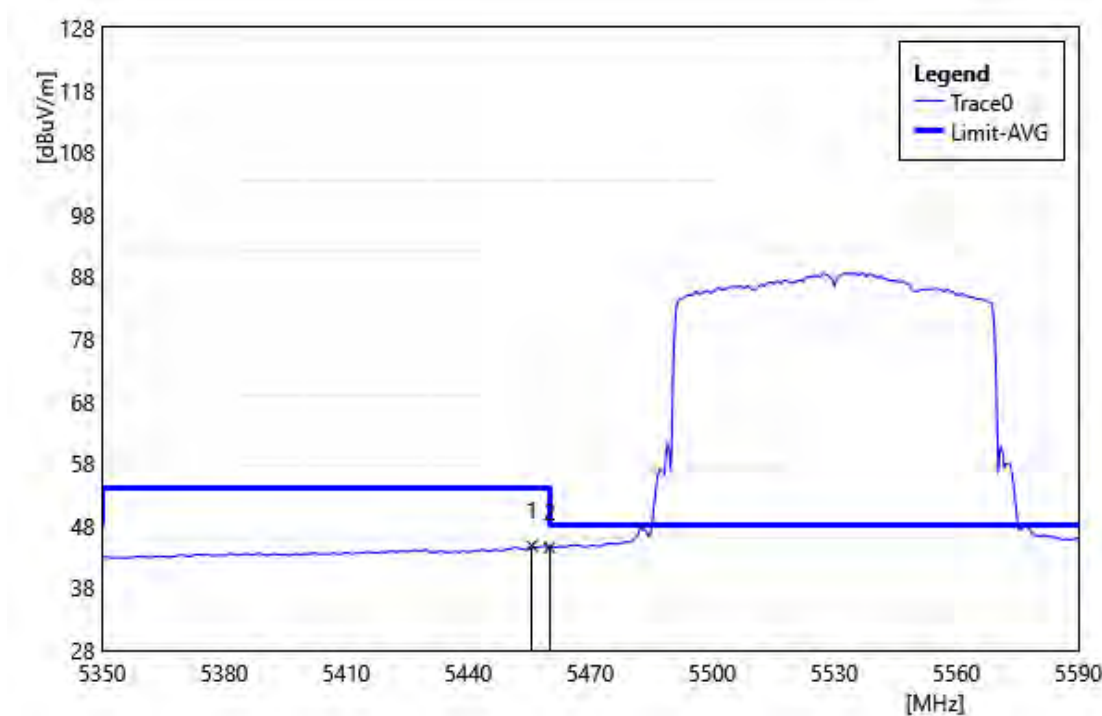


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5455.60          | 43.11           | 1.67                      | 44.78            | 54.00           | -9.22        | AVG    |
| 2  | 5460.00          | 42.81           | 1.69                      | 44.50            | 54.00           | -9.50        | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5530 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

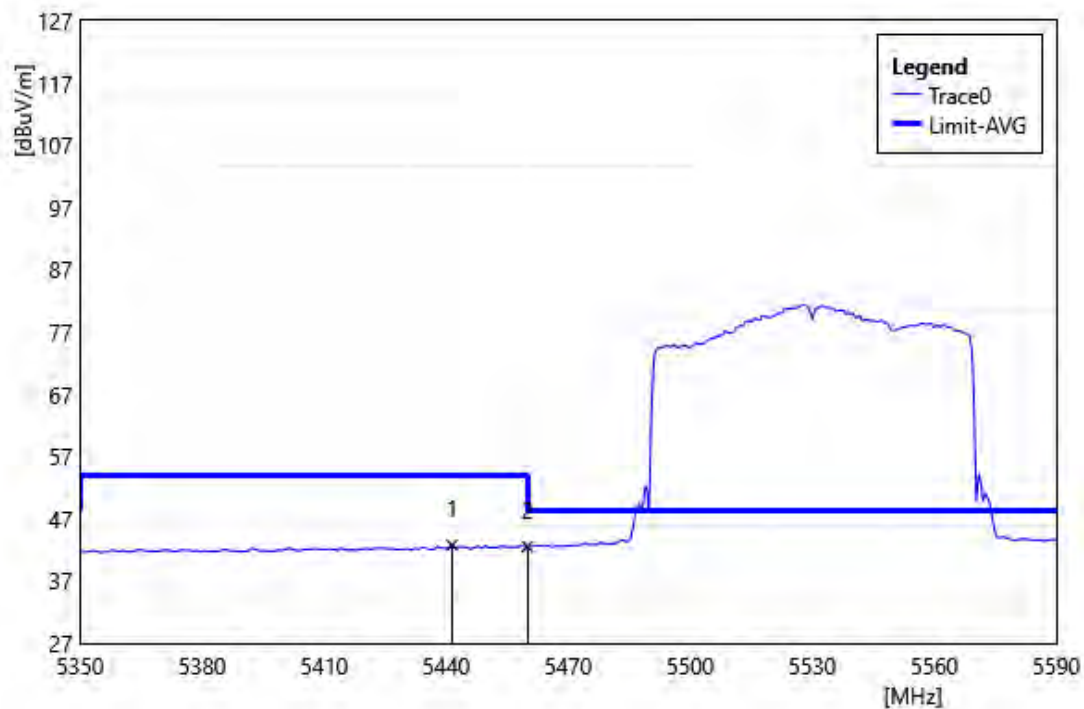


| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5441.44          | 41.14           | 1.61                      | 42.75            | 54.00           | -11.25       | AVG    |
| 2  | 5460.00          | 40.80           | 1.69                      | 42.49            | 54.00           | -11.51       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Horizontal             |           |             |
| Remark:       |                        |           |             |

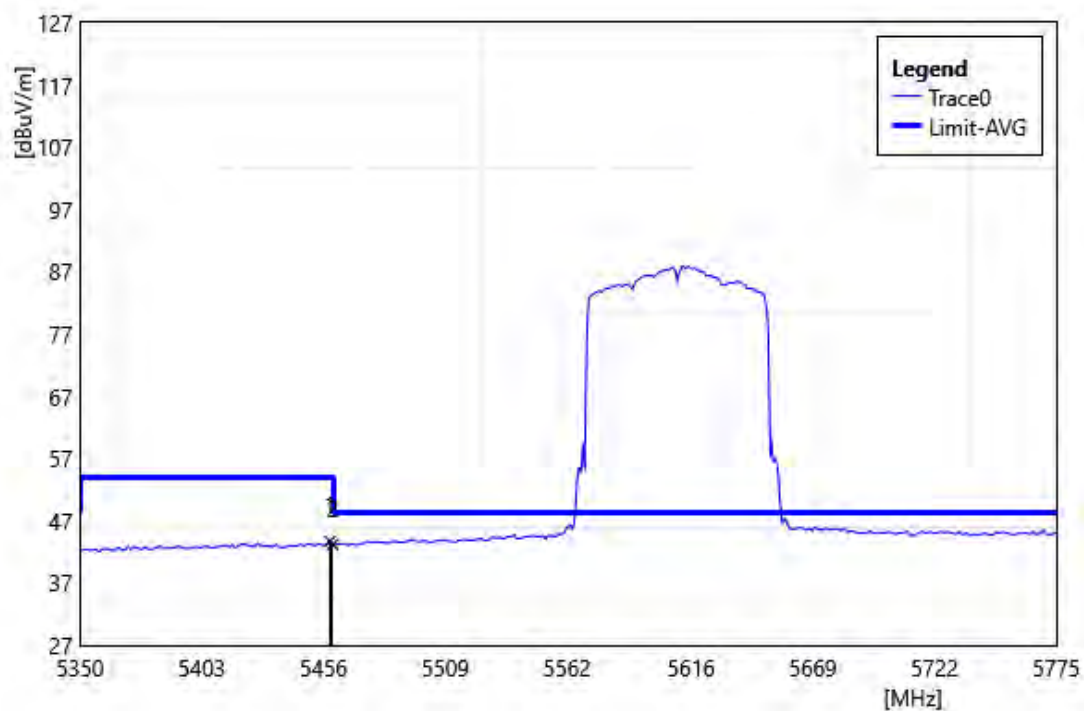

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5458.80          | 42.01           | 1.69                      | 43.71            | 54.00           | -10.30       | AVG    |
| 2  | 5460.00          | 41.53           | 1.69                      | 43.22            | 54.00           | -10.78       | AVG    |

|               |                        |           |             |
|---------------|------------------------|-----------|-------------|
| Test Site:    | 96602 - WG             | Standard: | Part 15.407 |
| Test Mode:    | 802.11ax HE80 5610 MHz |           |             |
| Polarization: | Vertical               |           |             |
| Remark:       |                        |           |             |

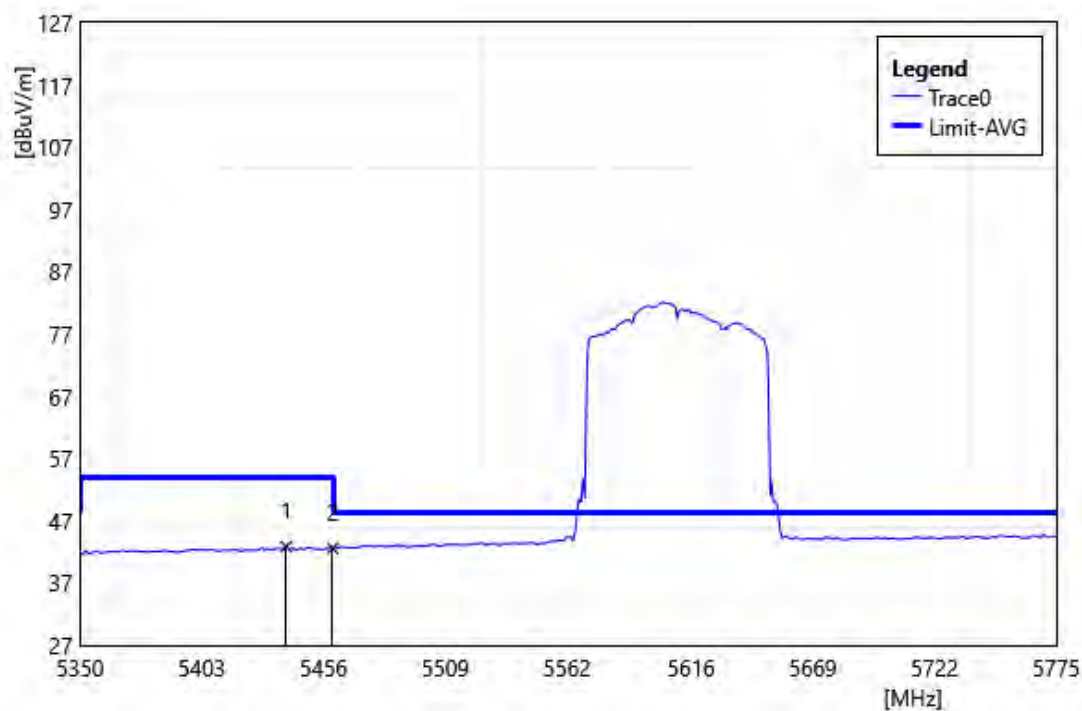

| ID | Frequency<br>MHz | Reading<br>dBuV | Correct<br>Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Remark |
|----|------------------|-----------------|---------------------------|------------------|-----------------|--------------|--------|
| 1  | 5439.68          | 41.25           | 1.60                      | 42.85            | 54.00           | -11.15       | AVG    |
| 2  | 5460.00          | 40.90           | 1.69                      | 42.59            | 54.00           | -11.41       | AVG    |

### **5.3. Conducted Test Results**

#### **Duty cycle**

Reference Appendix A / Appendix B

#### **Maximum Conducted Output Power Measurement**

Reference Appendix A

#### **26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement**

Reference Appendix A / Appendix B

#### **6 dB RF Bandwidth Measurement**

Reference Appendix A / Appendix B

#### **Maximum Power Spectral Density Measurement**

Reference Appendix A / Appendix B

---END---