


Test Report

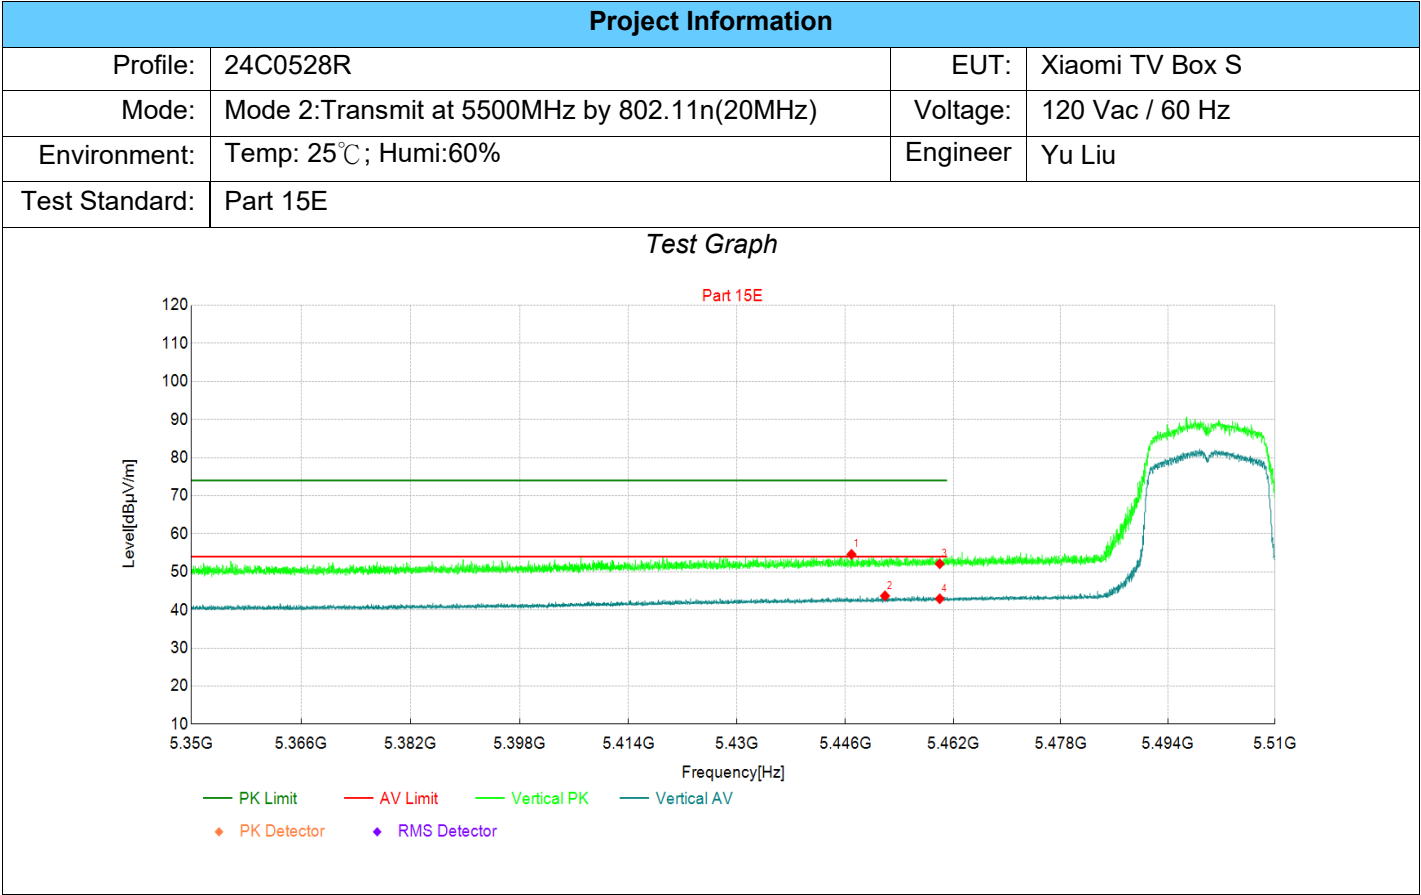

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5447	38.40	54.59	16.19	74.00	19.41	PK	Vertic	PASS
2	5452	27.45	43.70	16.25	54.00	10.30	AV	Vertic	PASS
3	5460	35.79	52.13	16.34	74.00	21.87	PK	Vertic	PASS
4	5460	26.59	42.93	16.34	54.00	11.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

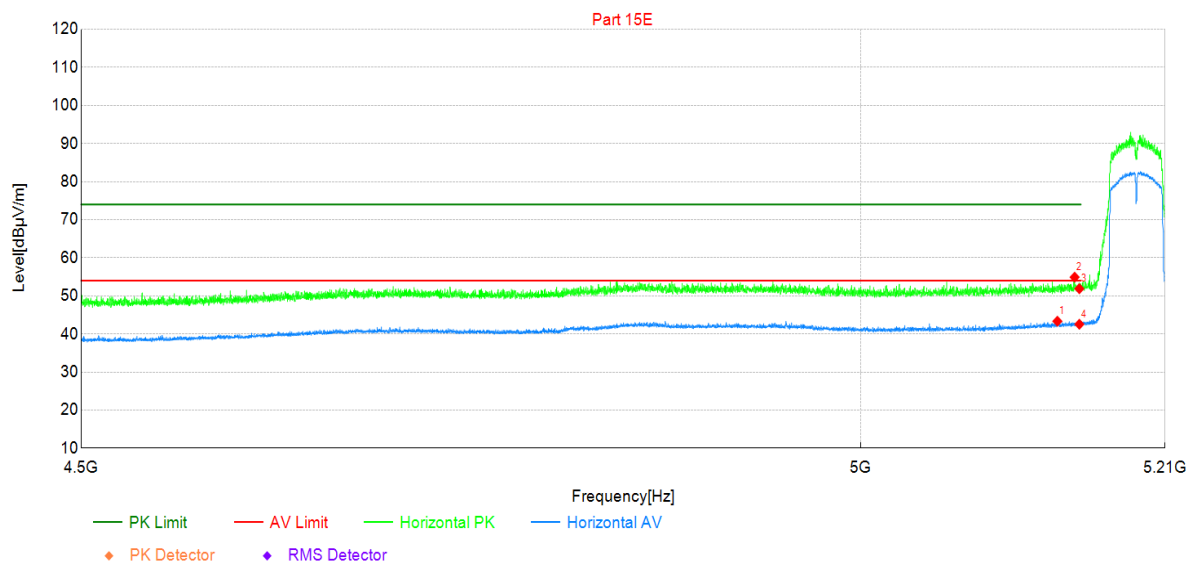

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5135	28.32	43.34	15.02	54.00	10.66	AV	Horizo	PASS
2	5147	39.82	54.91	15.09	74.00	19.09	PK	Horizo	PASS
3	5150	36.77	51.88	15.11	74.00	22.12	PK	Horizo	PASS
4	5150	27.44	42.55	15.11	54.00	11.45	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5190MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

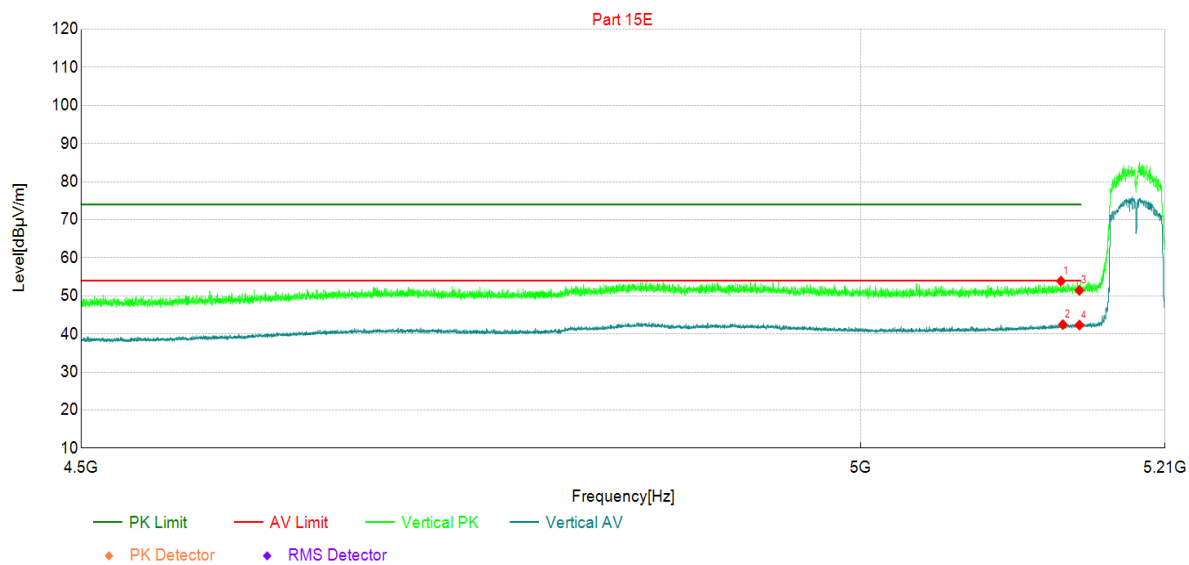

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5137	38.83	53.87	15.04	74.00	20.13	PK	Vertic	PASS
2	5139	27.42	42.46	15.04	54.00	11.54	AV	Vertic	PASS
3	5150	36.32	51.43	15.11	74.00	22.57	PK	Vertic	PASS
4	5150	27.22	42.33	15.11	54.00	11.67	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

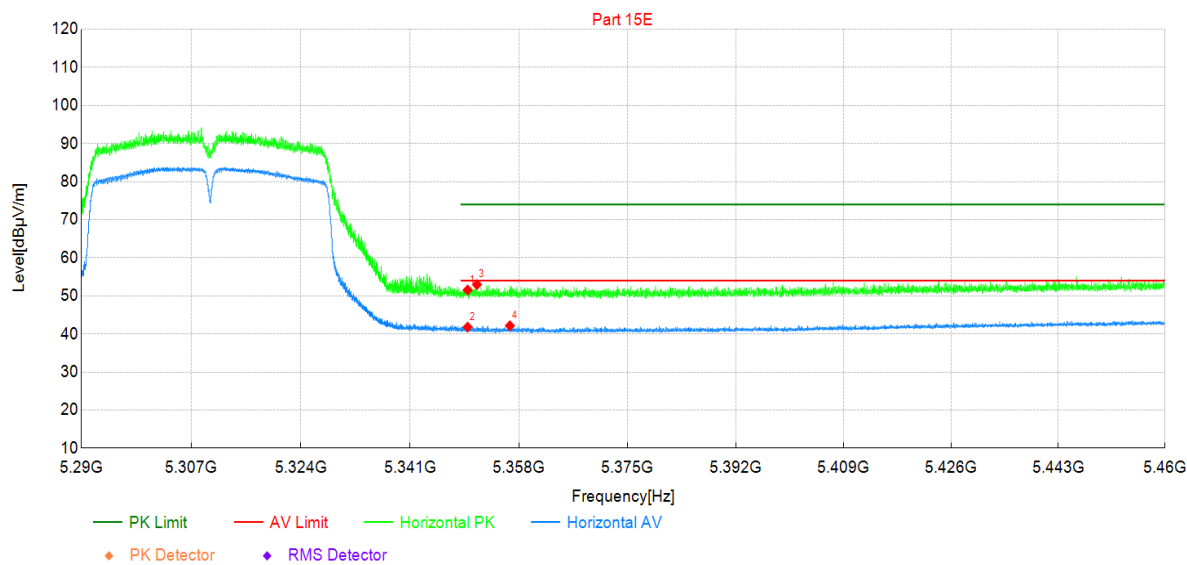

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.83	51.54	15.71	74.00	22.46	PK	Horizo	PASS
2	5350	26.08	41.79	15.71	54.00	12.21	AV	Horizo	PASS
3	5351	37.25	52.96	15.71	74.00	21.04	PK	Horizo	PASS
4	5357	26.46	42.16	15.70	54.00	11.84	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5310MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Yu Liu
Test Standard:	Part 15E		

Test Graph

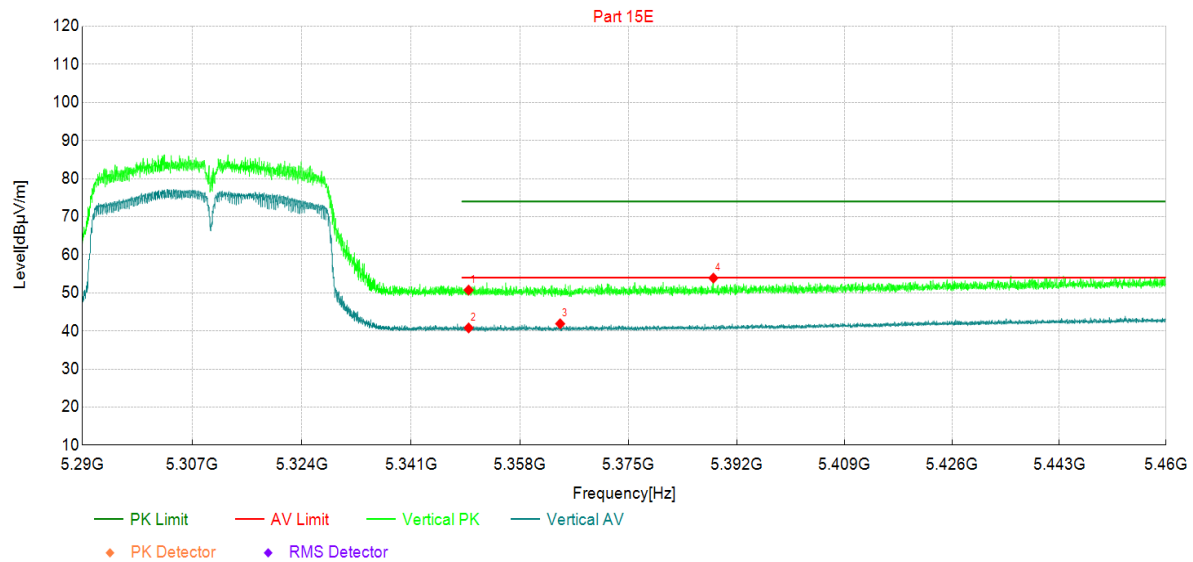

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.02	50.73	15.71	74.00	23.27	PK	Vertic	PASS
2	5350	25.08	40.79	15.71	54.00	13.21	AV	Vertic	PASS
3	5364	26.20	41.89	15.69	54.00	12.11	AV	Vertic	PASS
4	5388	38.21	53.88	15.67	74.00	20.12	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report


Project Information			
Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5510MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

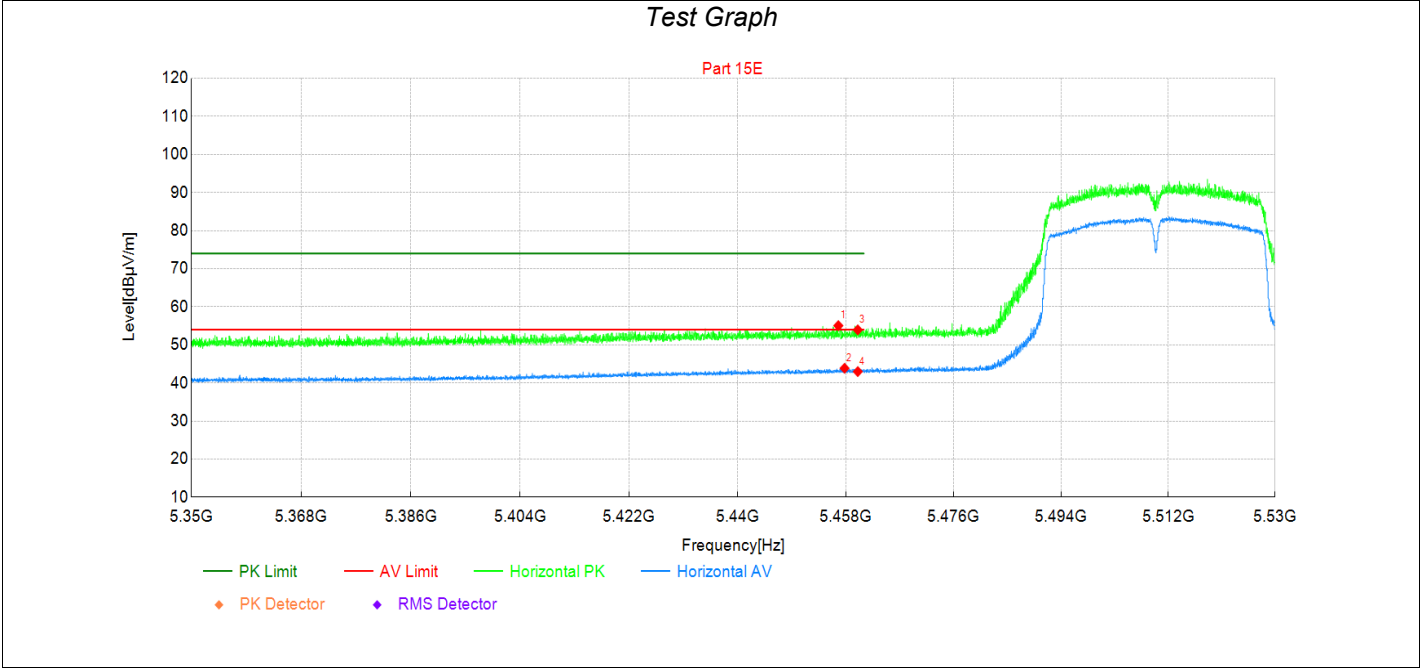

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	38.75	55.05	16.30	74.00	18.95	PK	Horizo	PASS
2	5458	27.54	43.85	16.31	54.00	10.15	AV	Horizo	PASS
3	5460	37.60	53.94	16.34	74.00	20.06	PK	Horizo	PASS
4	5460	26.64	42.98	16.34	54.00	11.02	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

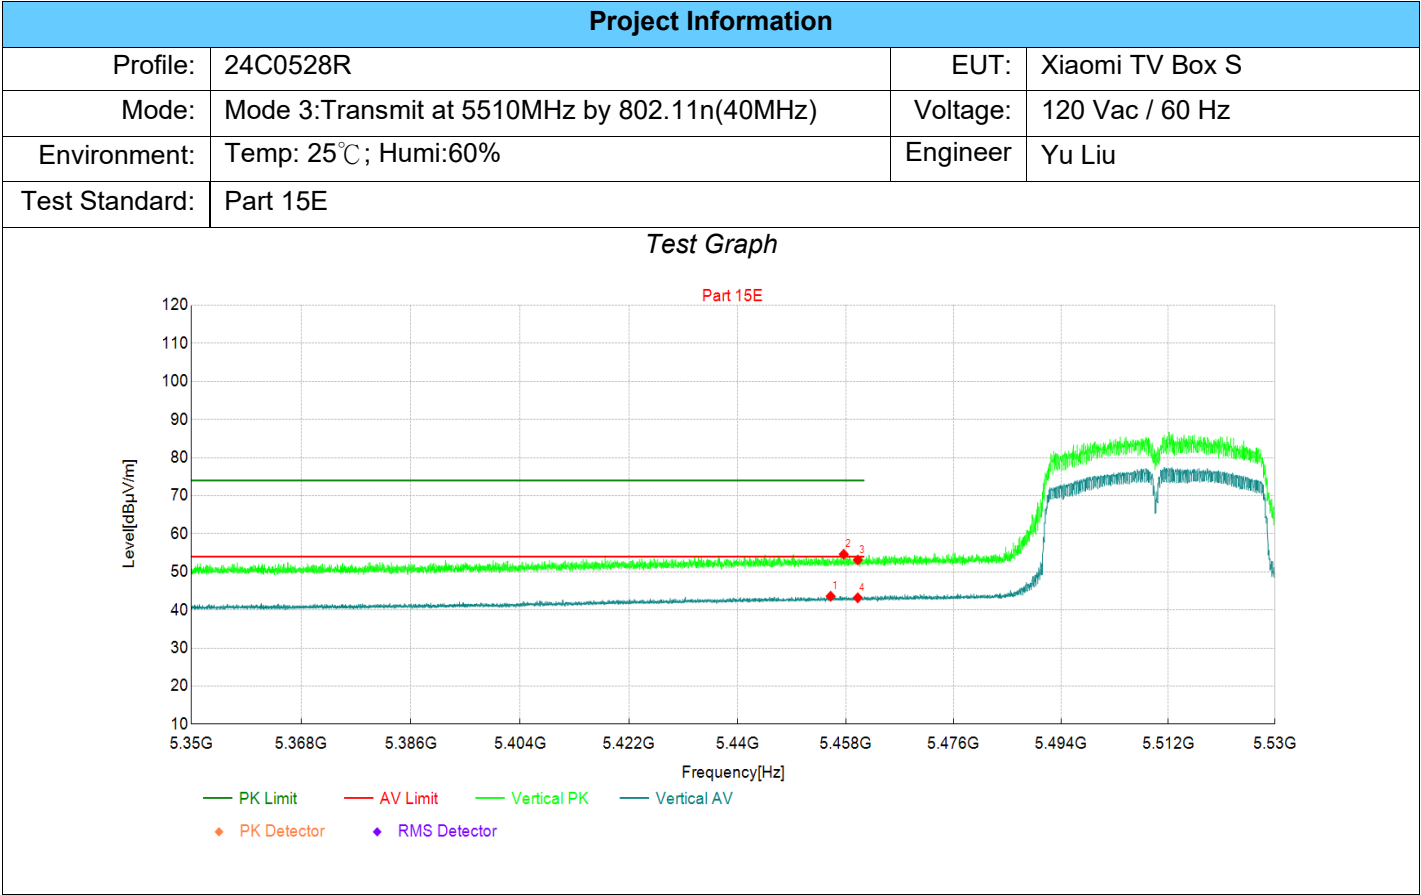

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5455	27.32	43.61	16.29	54.00	10.39	AV	Vertic	PASS
2	5458	38.31	54.62	16.31	74.00	19.38	PK	Vertic	PASS
3	5460	36.77	53.11	16.34	74.00	20.89	PK	Vertic	PASS
4	5460	26.85	43.19	16.34	54.00	10.81	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

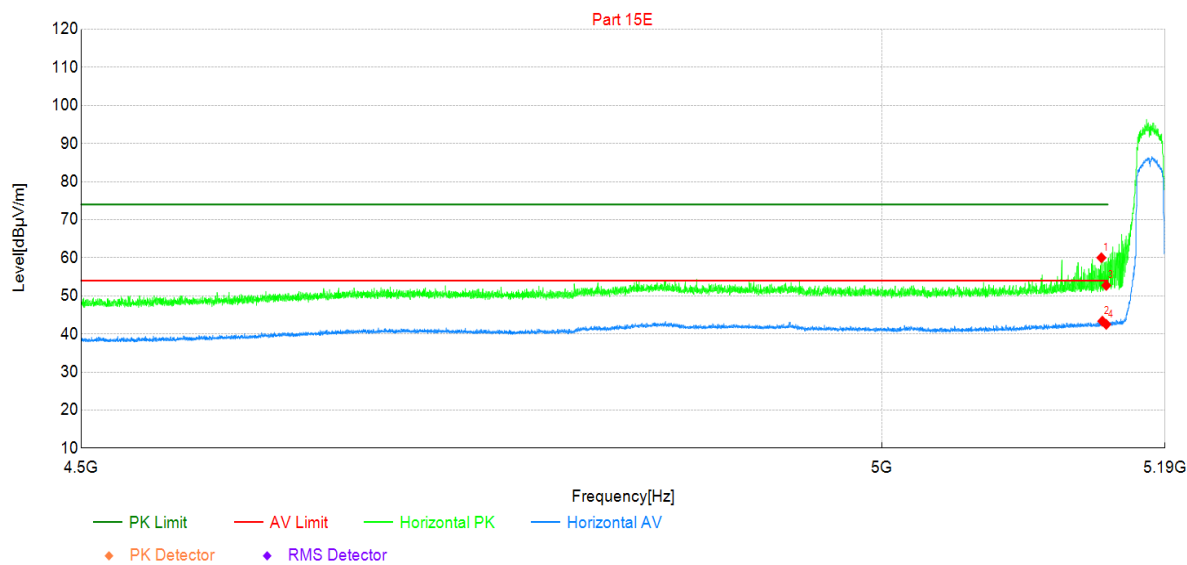

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5147	44.92	60.01	15.09	74.00	13.99	PK	Horizo	PASS
2	5147	28.26	43.35	15.09	54.00	10.65	AV	Horizo	PASS
3	5150	37.64	52.75	15.11	74.00	21.25	PK	Horizo	PASS
4	5150	27.41	42.52	15.11	54.00	11.48	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

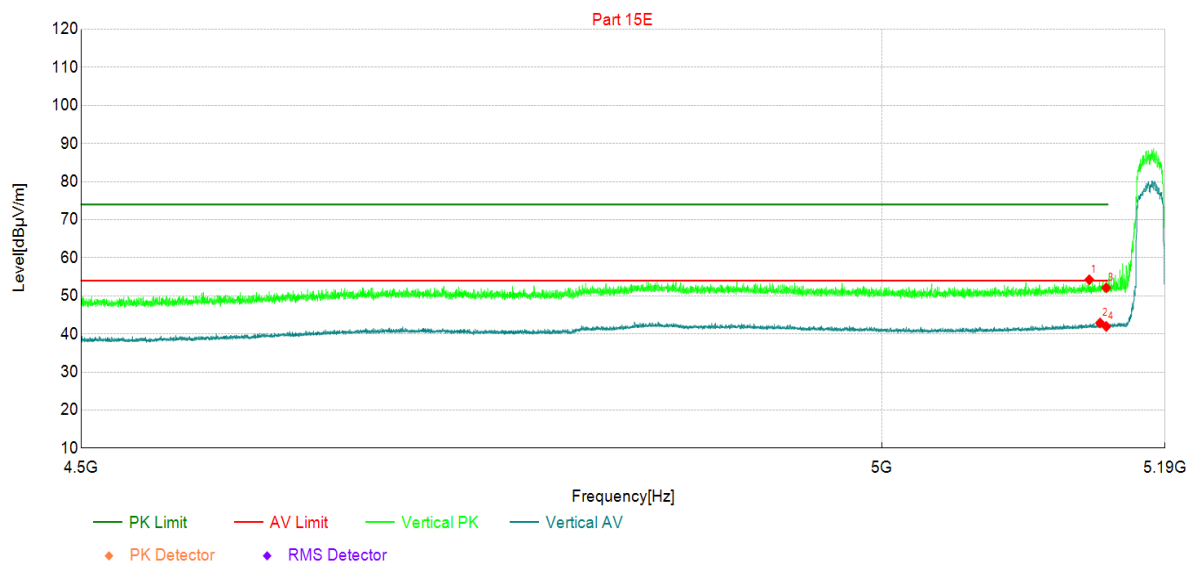

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5139	39.19	54.23	15.04	74.00	19.77	PK	Vertic	PASS
2	5146	27.80	42.89	15.09	54.00	11.11	AV	Vertic	PASS
3	5150	37.01	52.12	15.11	74.00	21.88	PK	Vertic	PASS
4	5150	26.86	41.97	15.11	54.00	12.03	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

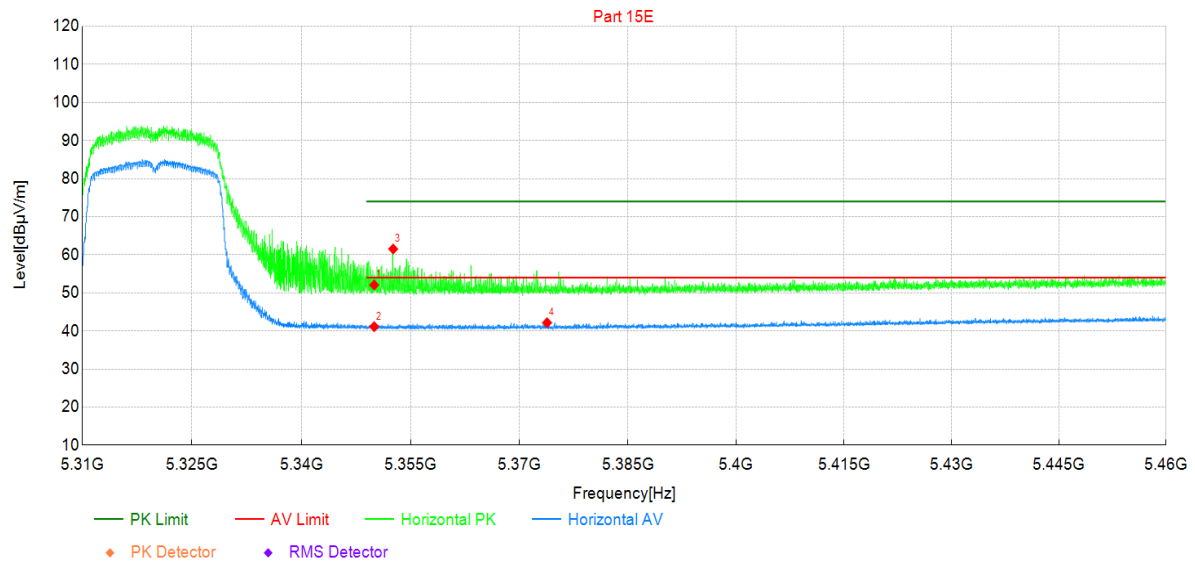

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.35	52.06	15.71	74.00	21.94	PK	Horizo	PASS
2	5350	25.42	41.13	15.71	54.00	12.87	AV	Horizo	PASS
3	5353	45.81	61.52	15.71	74.00	12.48	PK	Horizo	PASS
4	5374	26.48	42.16	15.68	54.00	11.84	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

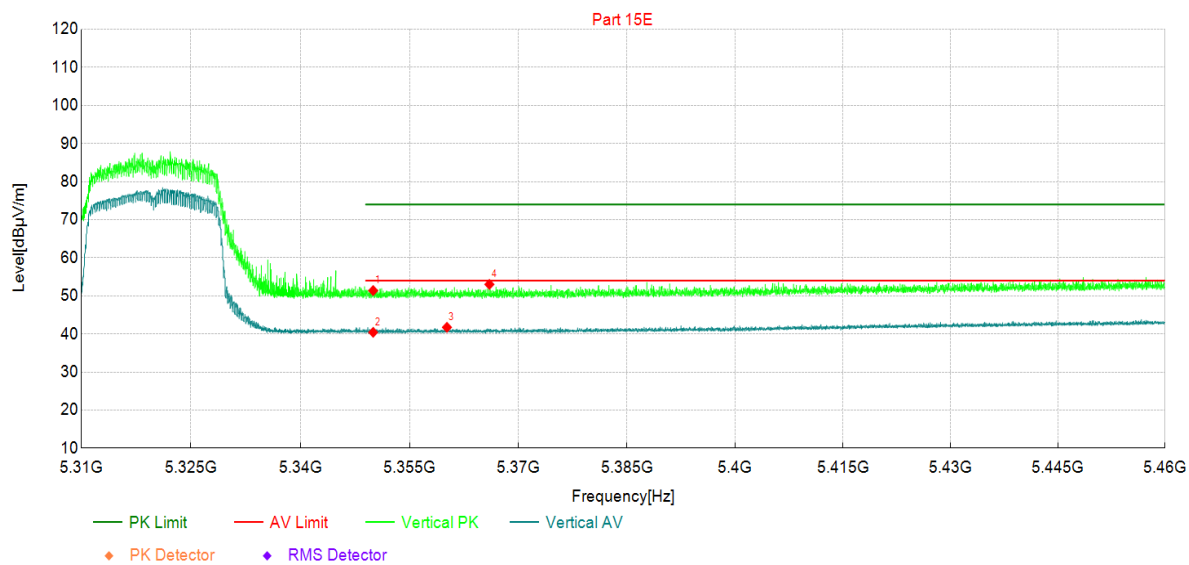

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.68	51.39	15.71	74.00	22.61	PK	Vertic	PASS
2	5350	24.71	40.42	15.71	54.00	13.58	AV	Vertic	PASS
3	5360	26.04	41.74	15.70	54.00	12.26	AV	Vertic	PASS
4	5366	37.33	53.02	15.69	74.00	20.98	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

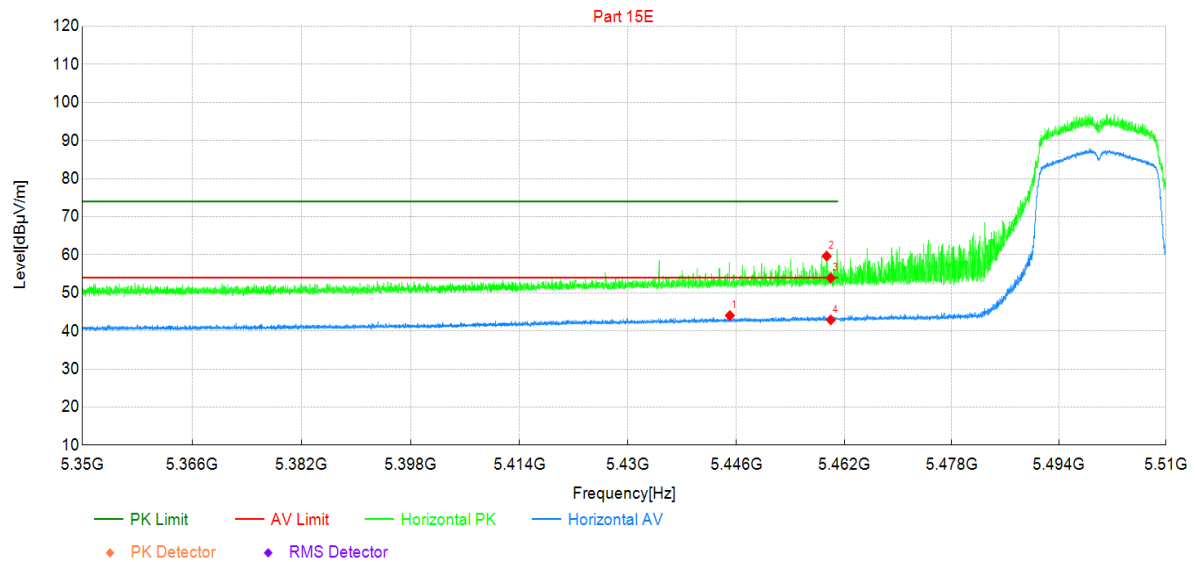

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5445	27.88	44.04	16.16	54.00	9.96	AV	Horizo	PASS
2	5459	43.32	59.66	16.34	74.00	14.34	PK	Horizo	PASS
3	5460	37.56	53.90	16.34	74.00	20.10	PK	Horizo	PASS
4	5460	26.56	42.90	16.34	54.00	11.10	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Yu Liu
Test Standard:	Part 15E		

Test Graph

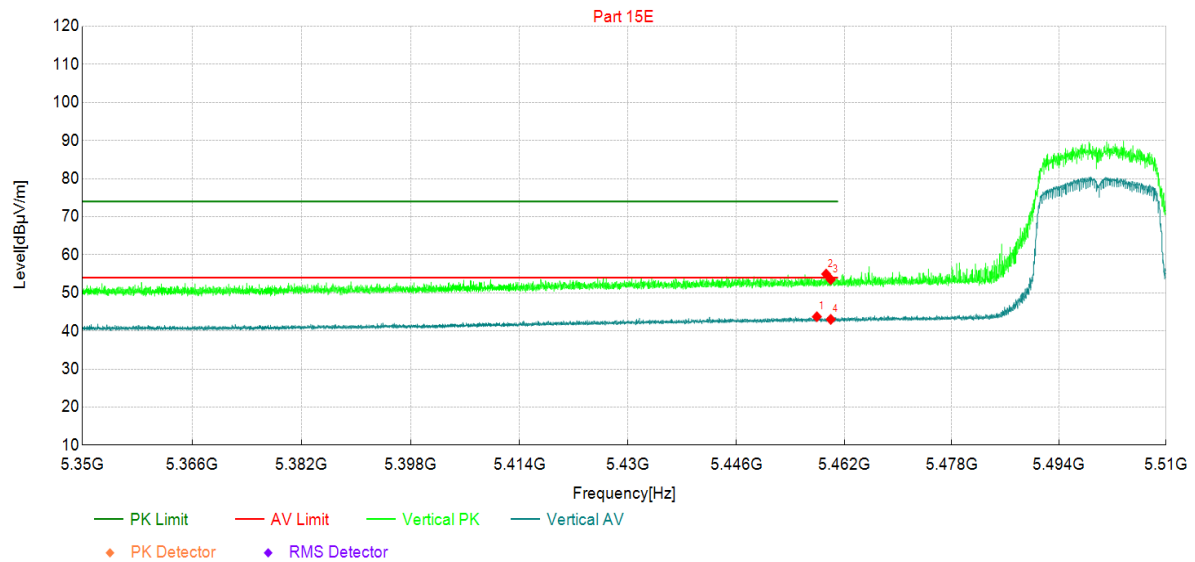

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.42	43.73	16.31	54.00	10.27	AV	Vertic	PASS
2	5459	38.61	54.95	16.34	74.00	19.05	PK	Vertic	PASS
3	5460	37.14	53.48	16.34	74.00	20.52	PK	Vertic	PASS
4	5460	26.70	43.04	16.34	54.00	10.96	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

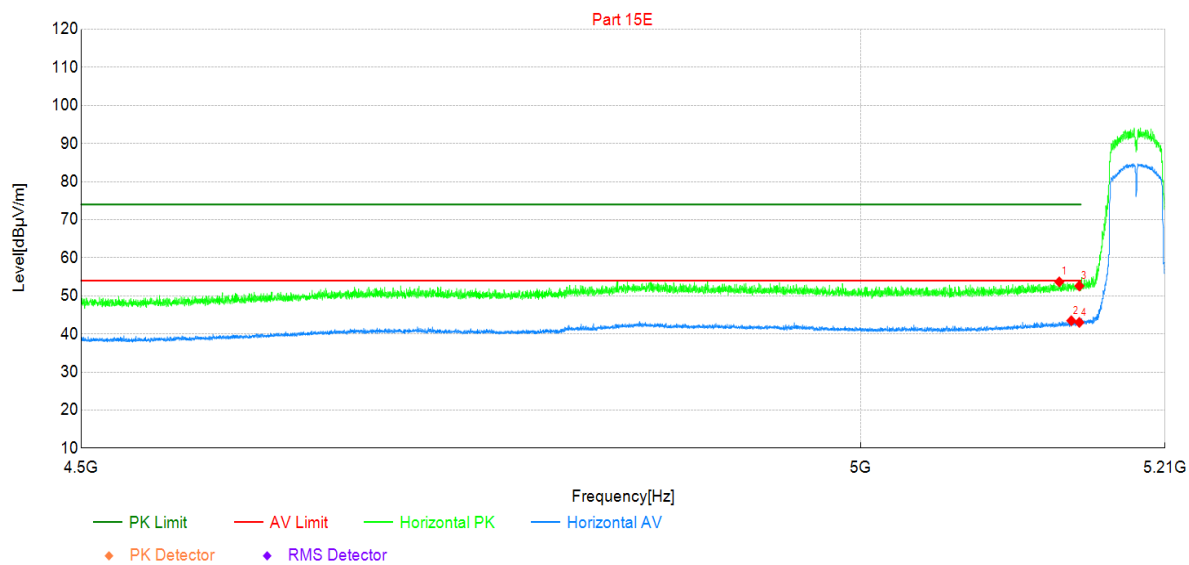

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5136	38.64	53.67	15.03	74.00	20.33	PK	Horizo	PASS
2	5144	28.39	43.47	15.08	54.00	10.53	AV	Horizo	PASS
3	5150	37.49	52.60	15.11	74.00	21.40	PK	Horizo	PASS
4	5150	27.92	43.03	15.11	54.00	10.97	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

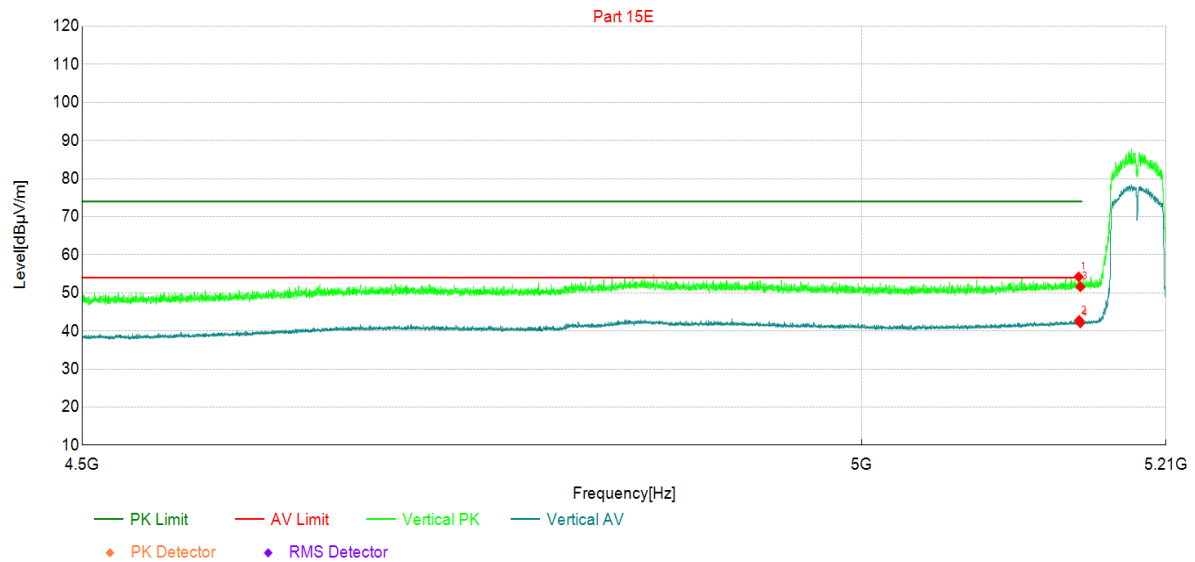

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5149	39.11	54.21	15.10	74.00	19.79	PK	Vertic	PASS
2	5149	27.65	42.76	15.11	54.00	11.24	AV	Vertic	PASS
3	5150	36.49	51.60	15.11	74.00	22.40	PK	Vertic	PASS
4	5150	27.00	42.11	15.11	54.00	11.89	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Yu Liu
Test Standard:	Part 15E		

Test Graph

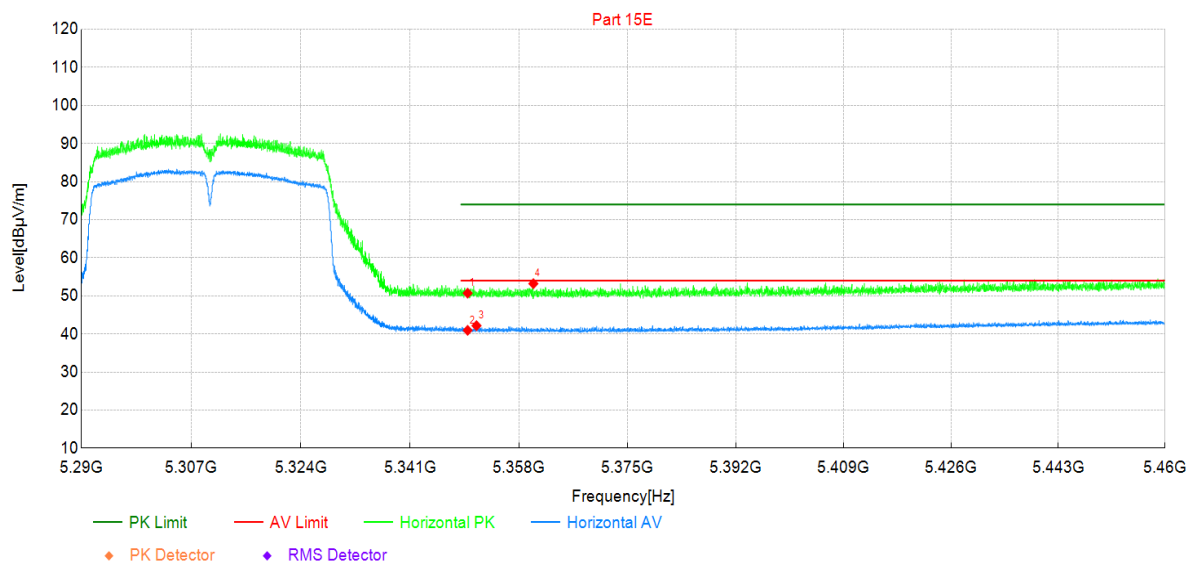

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.00	50.71	15.71	74.00	23.29	PK	Horizo	PASS
2	5350	25.23	40.94	15.71	54.00	13.06	AV	Horizo	PASS
3	5351	26.46	42.17	15.71	54.00	11.83	AV	Horizo	PASS
4	5360	37.51	53.21	15.70	74.00	20.79	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Yu Liu
Test Standard:	Part 15E		

Test Graph

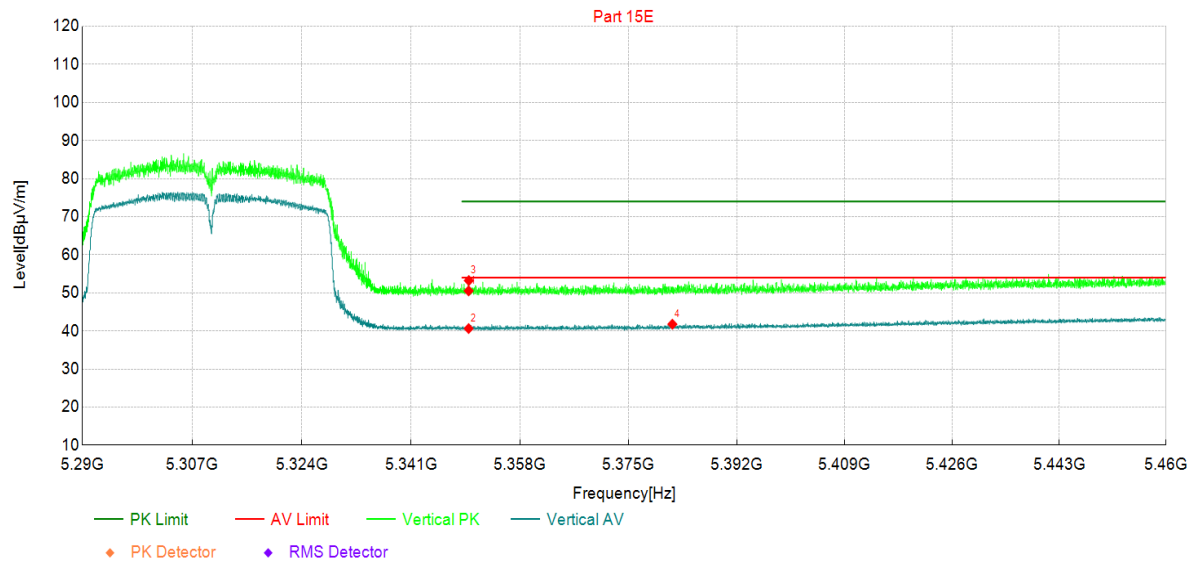


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.81	50.52	15.71	74.00	23.48	PK	Vertic	PASS
2	5350	24.92	40.63	15.71	54.00	13.37	AV	Vertic	PASS
3	5350	37.53	53.24	15.71	74.00	20.76	PK	Vertic	PASS
4	5382	26.09	41.77	15.68	54.00	12.23	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

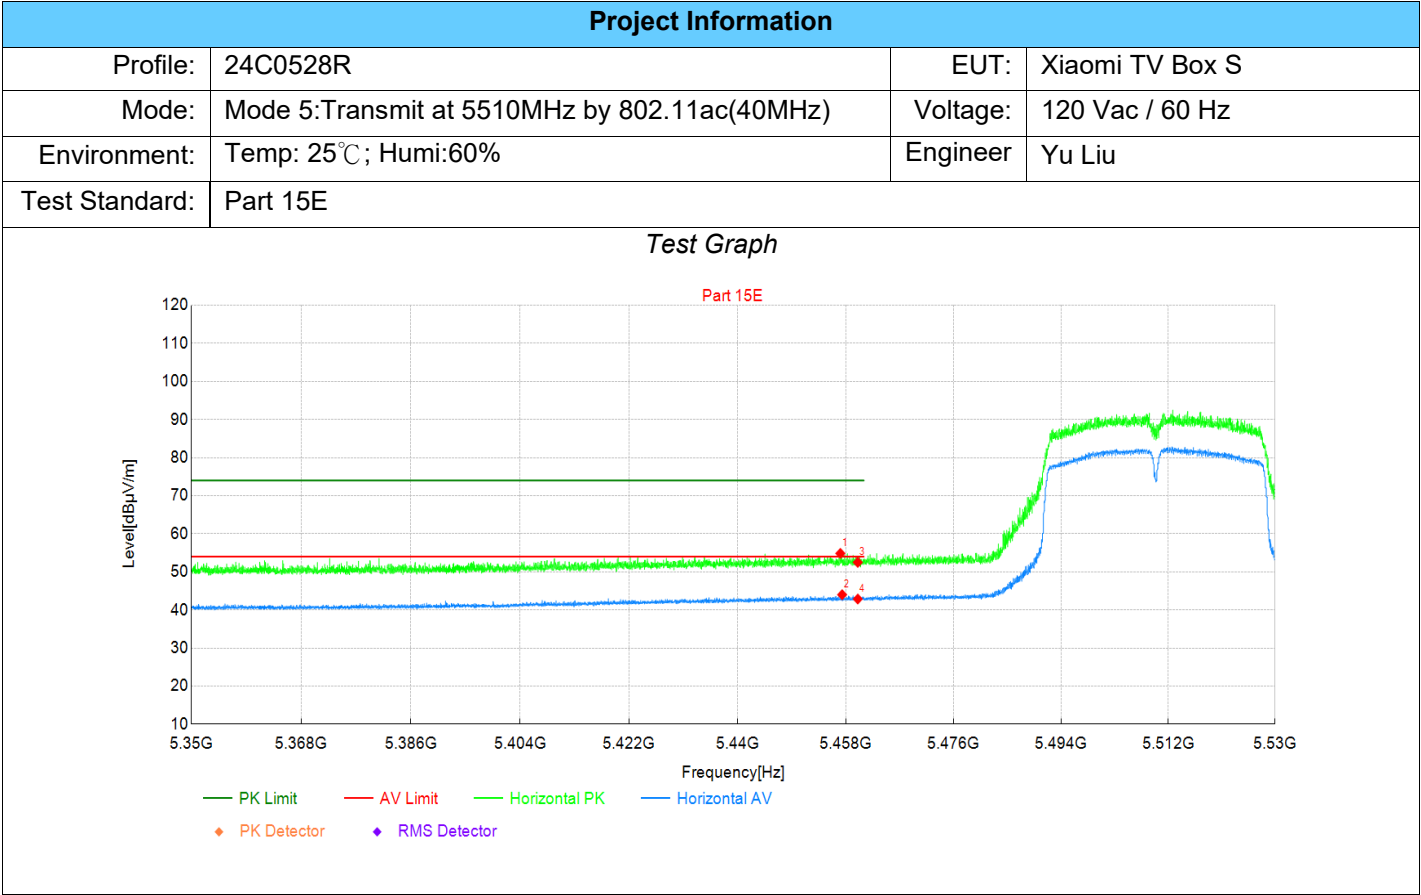

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	38.54	54.85	16.31	74.00	19.15	PK	Horizo	PASS
2	5457	27.69	44.00	16.31	54.00	10.00	AV	Horizo	PASS
3	5460	36.16	52.50	16.34	74.00	21.50	PK	Horizo	PASS
4	5460	26.53	42.87	16.34	54.00	11.13	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

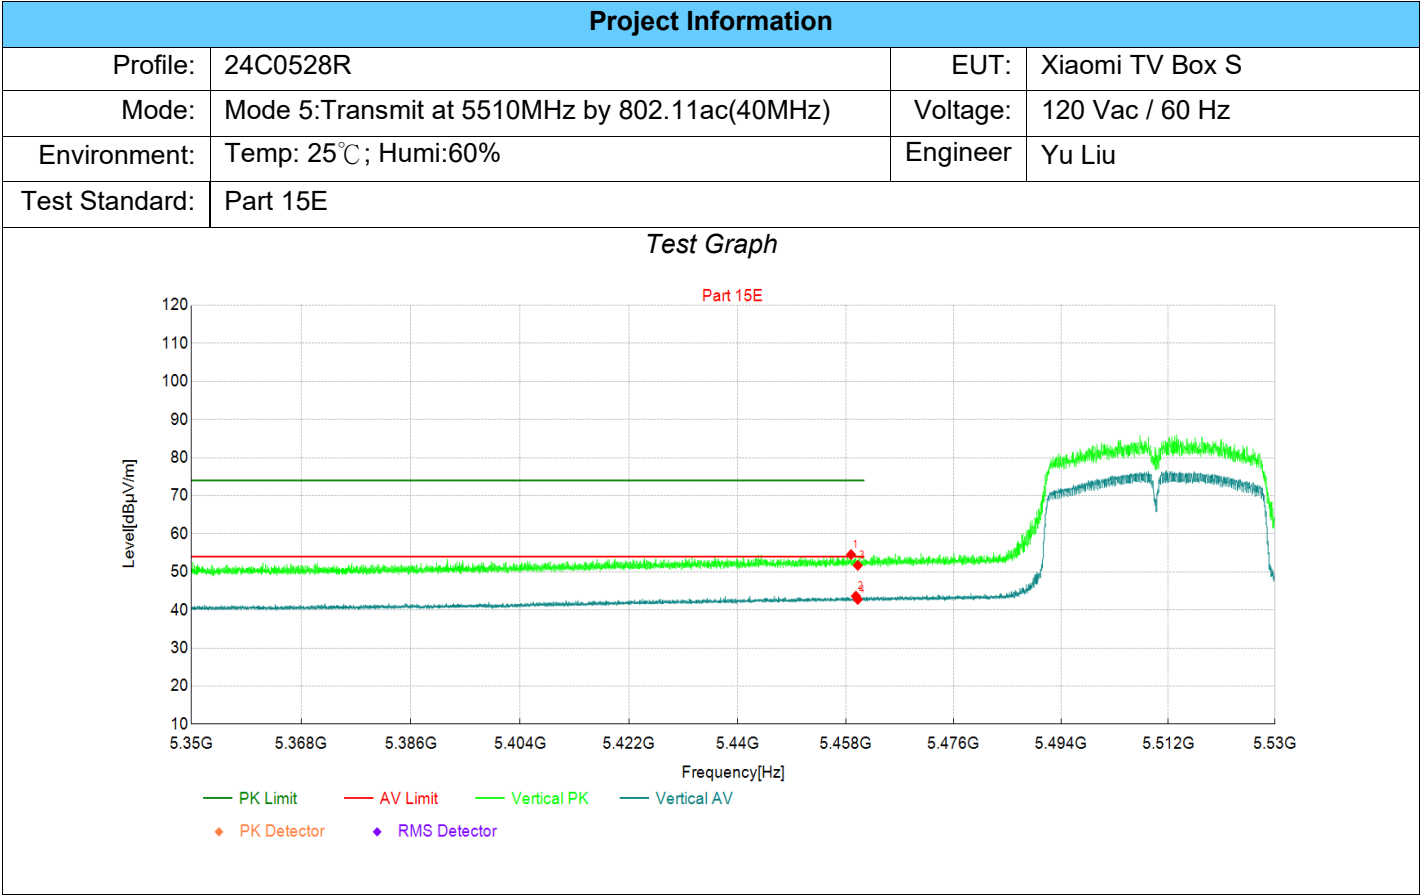

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	38.22	54.55	16.33	74.00	19.45	PK	Vertic	PASS
2	5460	27.29	43.63	16.34	54.00	10.37	AV	Vertic	PASS
3	5460	35.36	51.70	16.34	74.00	22.30	PK	Vertic	PASS
4	5460	26.42	42.76	16.34	54.00	11.24	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

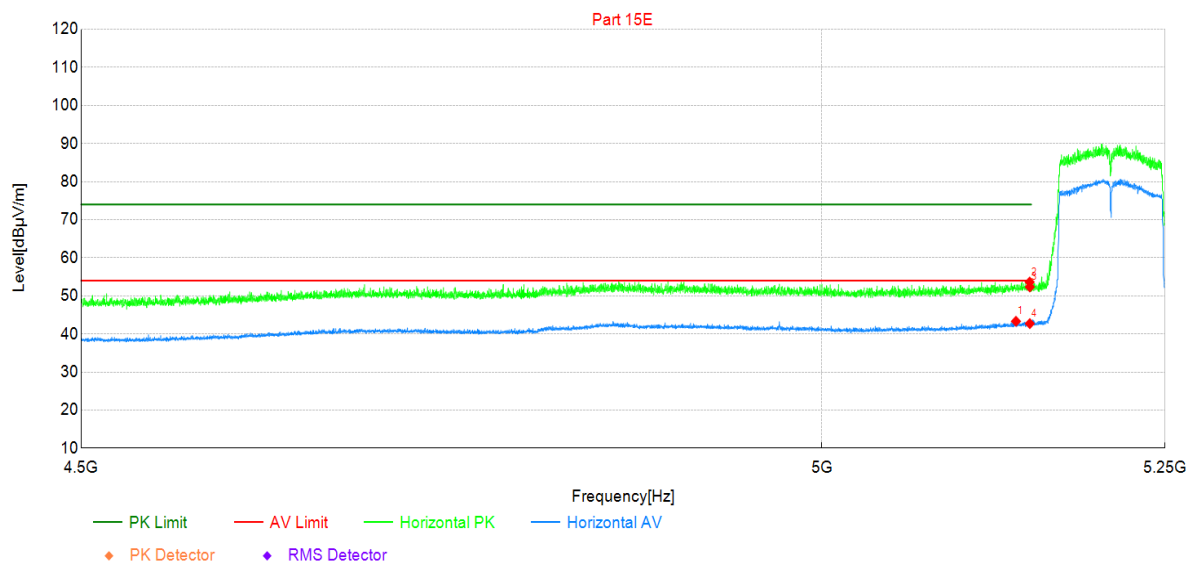

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5140	28.27	43.32	15.05	54.00	10.68	AV	Horizo	PASS
2	5150	38.51	53.62	15.11	74.00	20.38	PK	Horizo	PASS
3	5150	37.23	52.34	15.11	74.00	21.66	PK	Horizo	PASS
4	5150	27.60	42.71	15.11	54.00	11.29	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5210MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

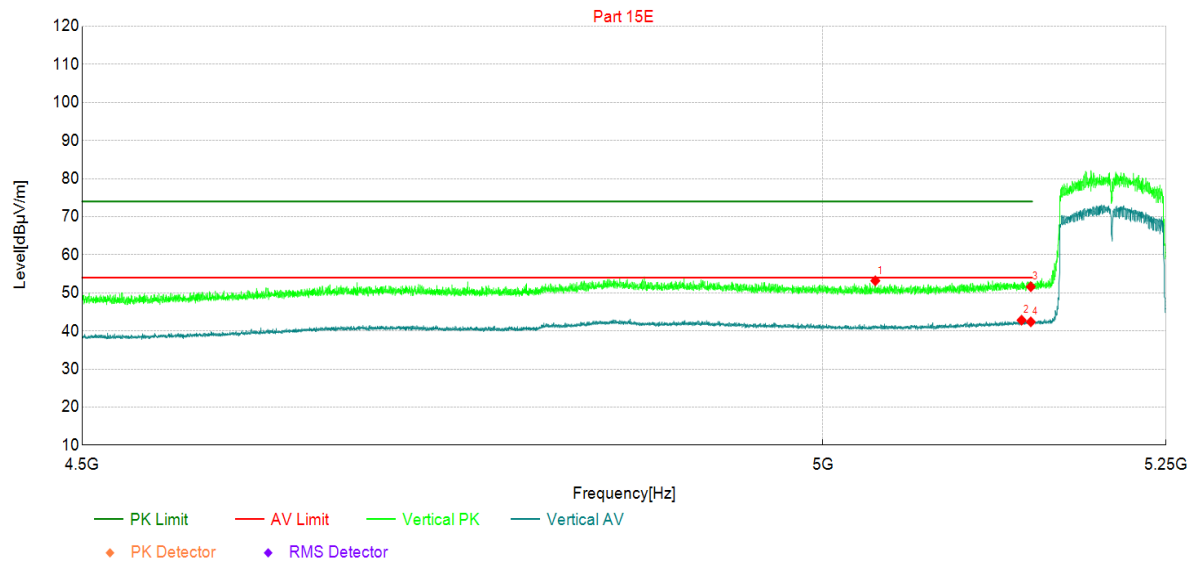

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5037	38.69	53.17	14.48	74.00	20.83	PK	Vertic	PASS
2	5143	27.75	42.82	15.07	54.00	11.18	AV	Vertic	PASS
3	5150	36.50	51.61	15.11	74.00	22.39	PK	Vertic	PASS
4	5150	27.27	42.38	15.11	54.00	11.62	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

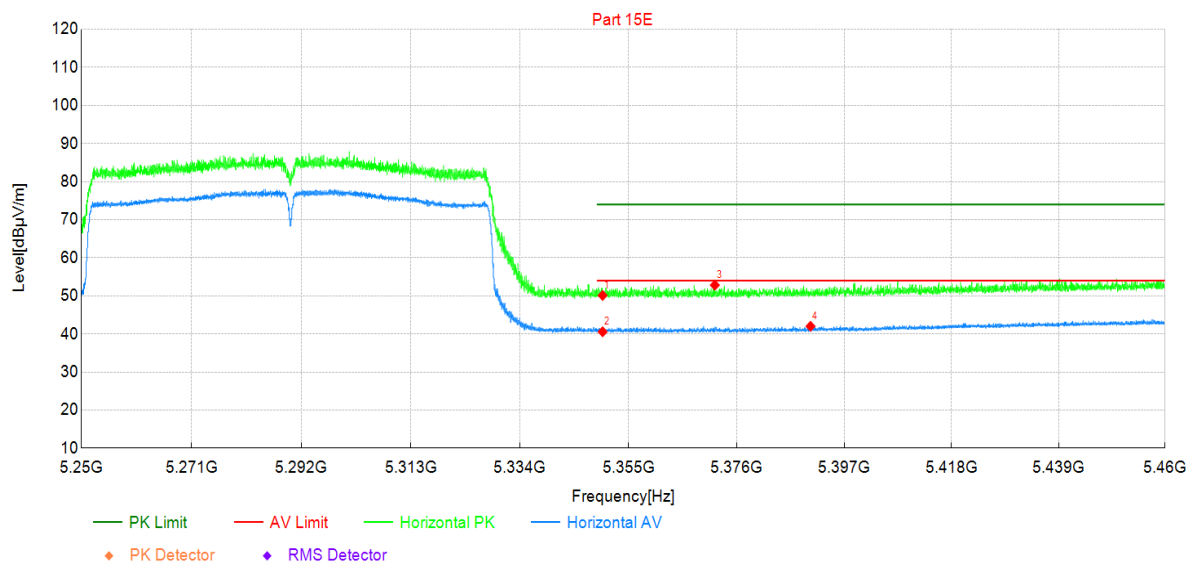

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.40	50.11	15.71	74.00	23.89	PK	Horizo	PASS
2	5350	24.86	40.57	15.71	54.00	13.43	AV	Horizo	PASS
3	5372	37.14	52.82	15.68	74.00	21.18	PK	Horizo	PASS
4	5390	26.35	42.01	15.66	54.00	11.99	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5290MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

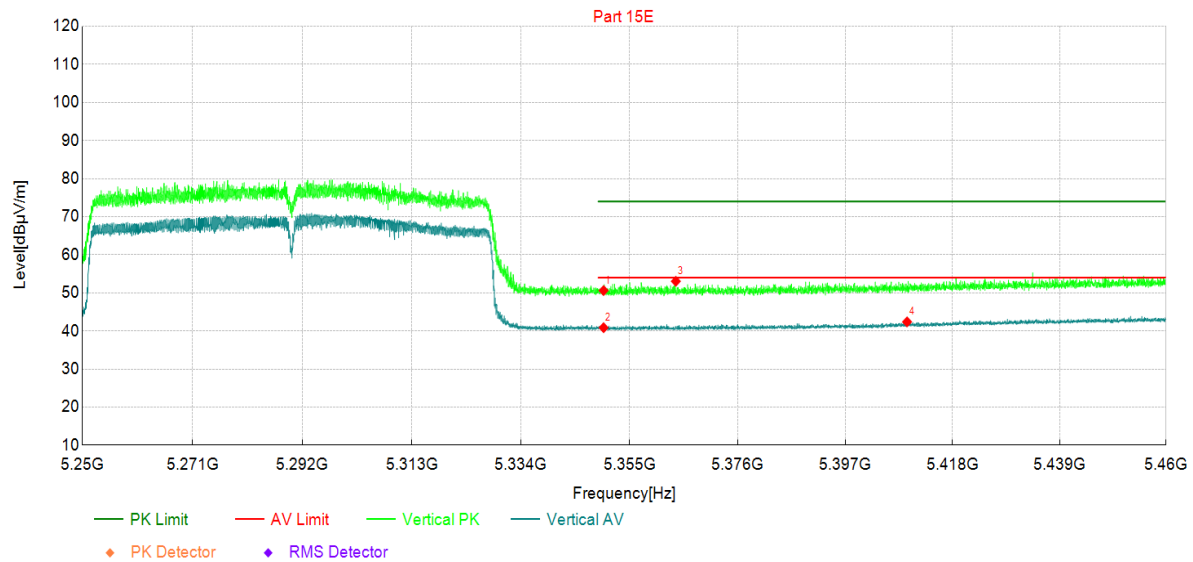

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.89	50.60	15.71	74.00	23.40	PK	Vertic	PASS
2	5350	25.14	40.85	15.71	54.00	13.15	AV	Vertic	PASS
3	5364	37.36	53.05	15.69	74.00	20.95	PK	Vertic	PASS
4	5409	26.63	42.38	15.75	54.00	11.62	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report


Project Information			
Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5530MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

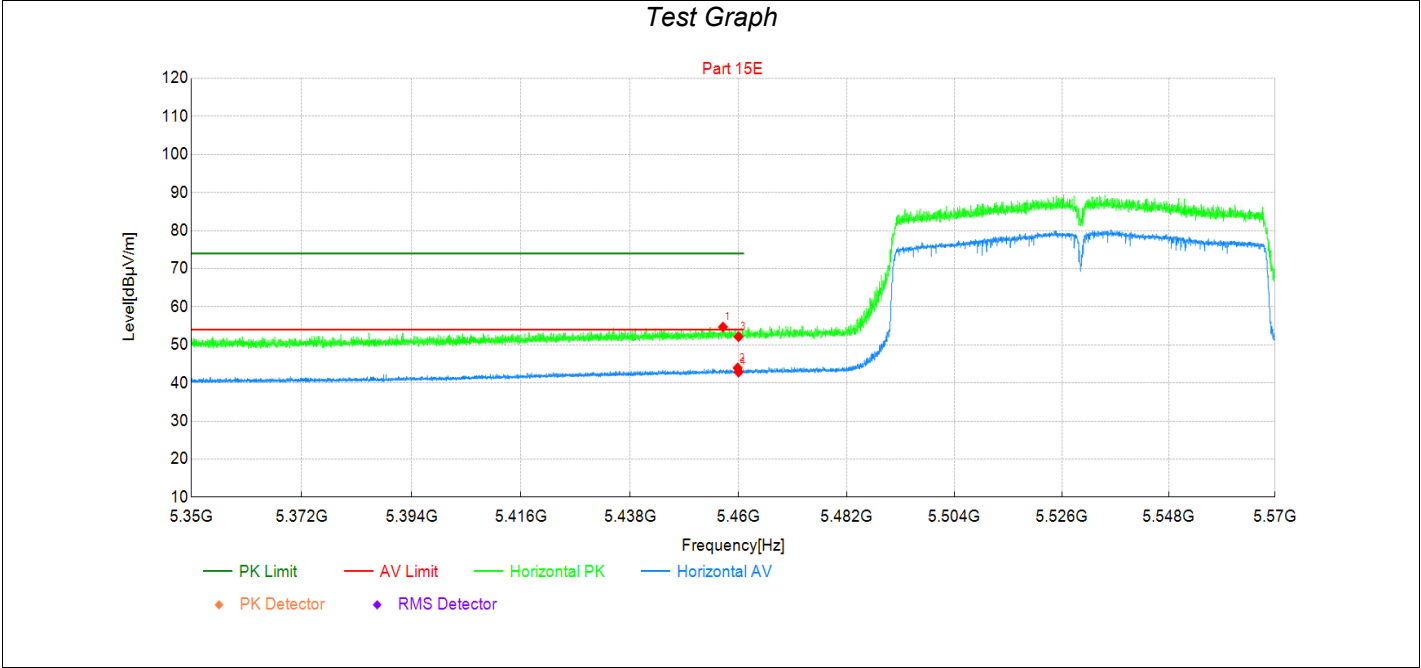

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	38.39	54.69	16.30	74.00	19.31	PK	Horizo	PASS
2	5460	27.59	43.93	16.34	54.00	10.07	AV	Horizo	PASS
3	5460	35.80	52.14	16.34	74.00	21.86	PK	Horizo	PASS
4	5460	26.51	42.85	16.34	54.00	11.15	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

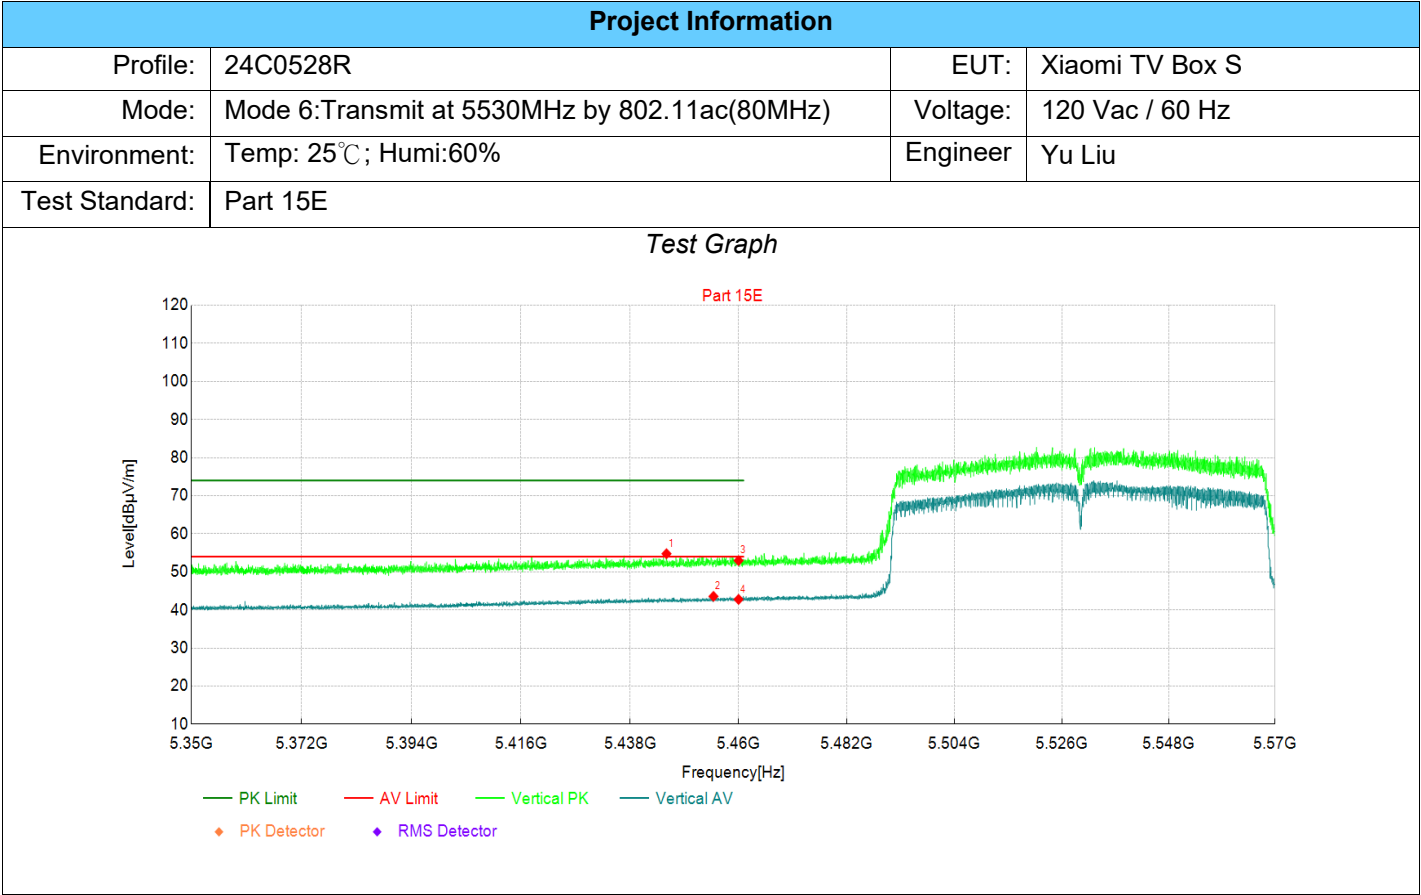

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5445	38.59	54.76	16.17	74.00	19.24	PK	Vertic	PASS
2	5455	27.27	43.56	16.29	54.00	10.44	AV	Vertic	PASS
3	5460	36.62	52.96	16.34	74.00	21.04	PK	Vertic	PASS
4	5460	26.44	42.78	16.34	54.00	11.22	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5180MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

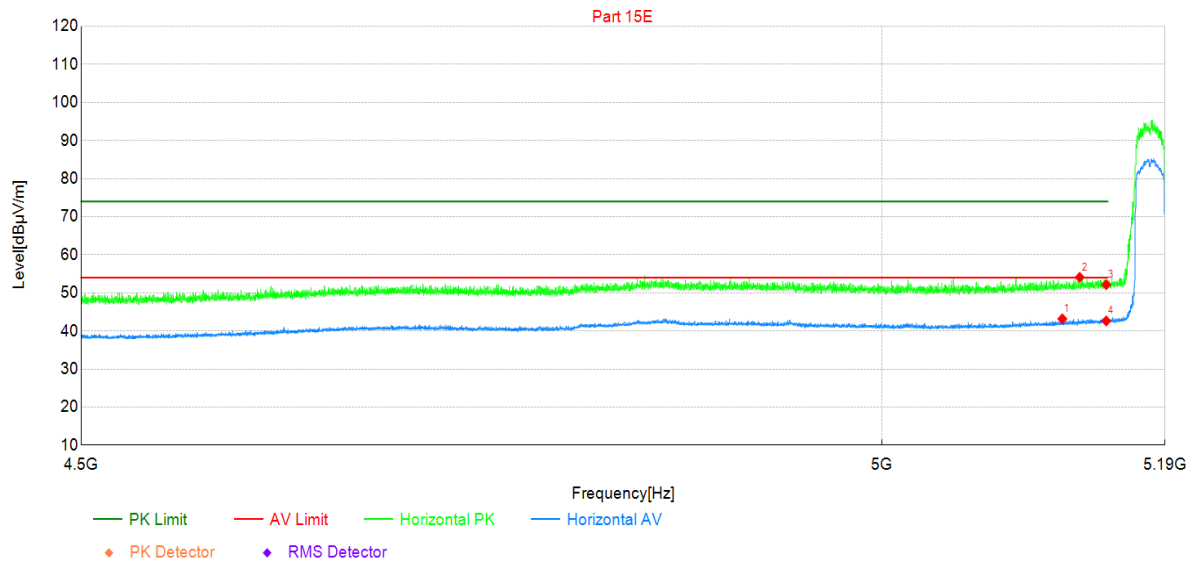


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5120	28.23	43.17	14.94	54.00	10.83	AV	Horizo	PASS
2	5132	39.09	54.10	15.01	74.00	19.90	PK	Horizo	PASS
3	5150	37.04	52.15	15.11	74.00	21.85	PK	Horizo	PASS
4	5150	27.52	42.63	15.11	54.00	11.37	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

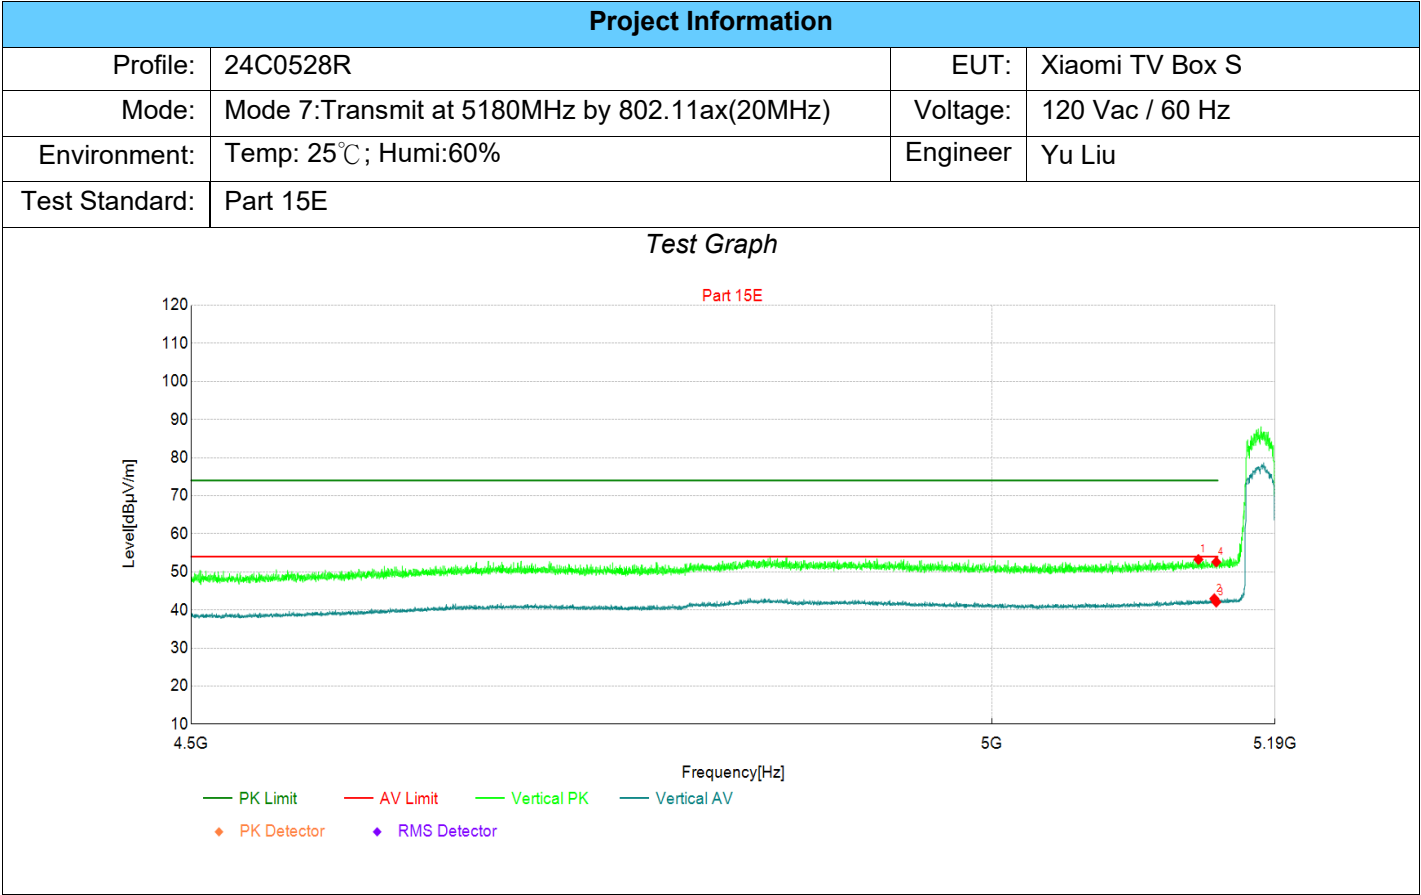


Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5138	38.21	53.25	15.04	74.00	20.75	PK	Vertic	PASS
2	5149	27.85	42.95	15.10	54.00	11.05	AV	Vertic	PASS
3	5150	26.95	42.06	15.11	54.00	11.94	AV	Vertic	PASS
4	5150	37.48	52.59	15.11	74.00	21.41	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information			
Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

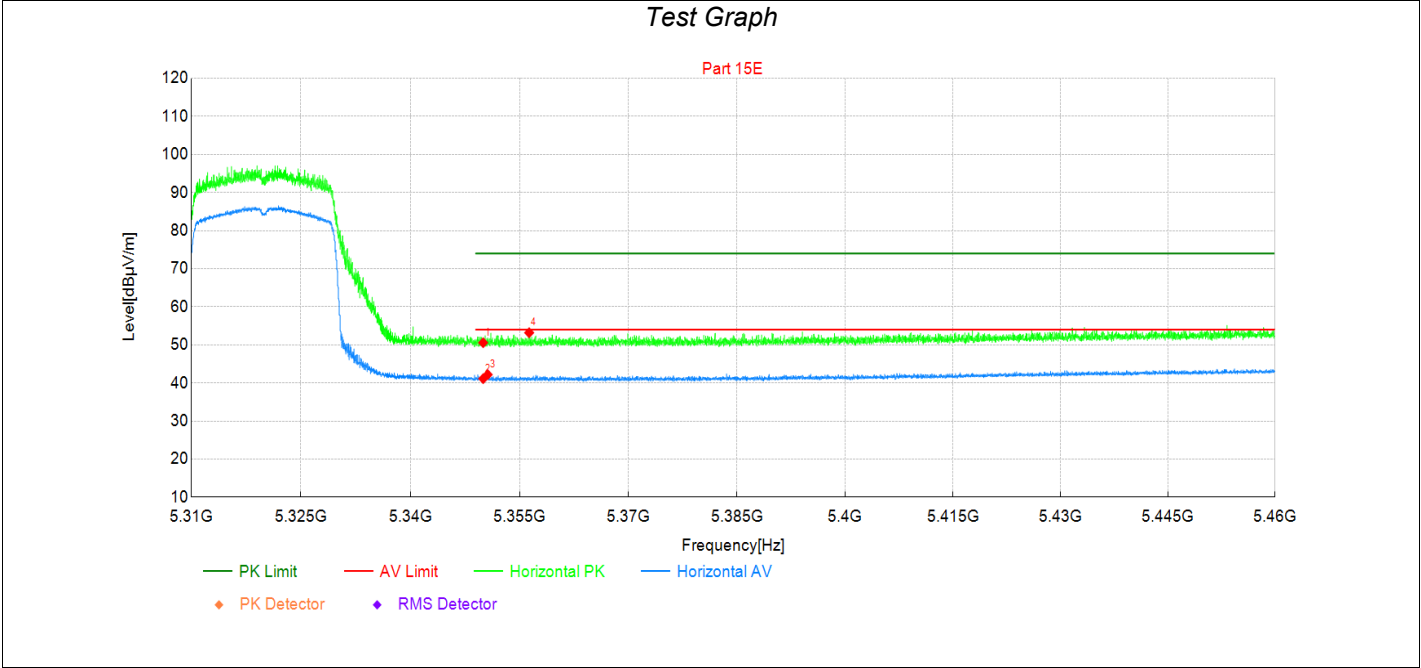

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.86	50.57	15.71	74.00	23.43	PK	Horizo	PASS
2	5350	25.40	41.11	15.71	54.00	12.89	AV	Horizo	PASS
3	5351	26.47	42.18	15.71	54.00	11.82	AV	Horizo	PASS
4	5356	37.49	53.19	15.70	74.00	20.81	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

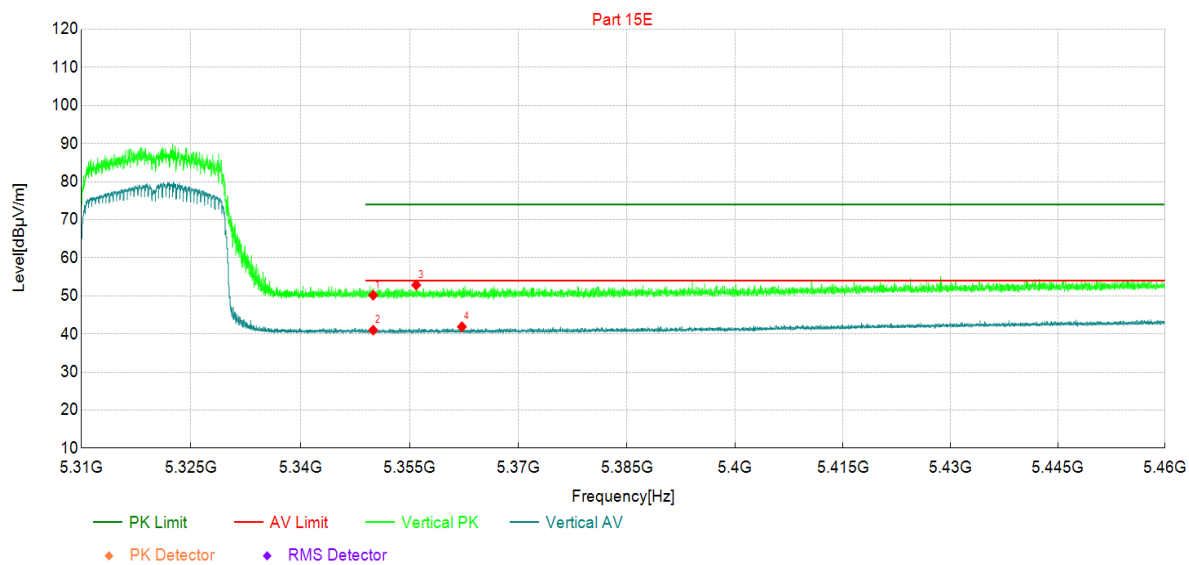

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.46	50.17	15.71	74.00	23.83	PK	Vertic	PASS
2	5350	25.29	41.00	15.71	54.00	13.00	AV	Vertic	PASS
3	5356	37.15	52.85	15.70	74.00	21.15	PK	Vertic	PASS
4	5362	26.20	41.89	15.69	54.00	12.11	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5500MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

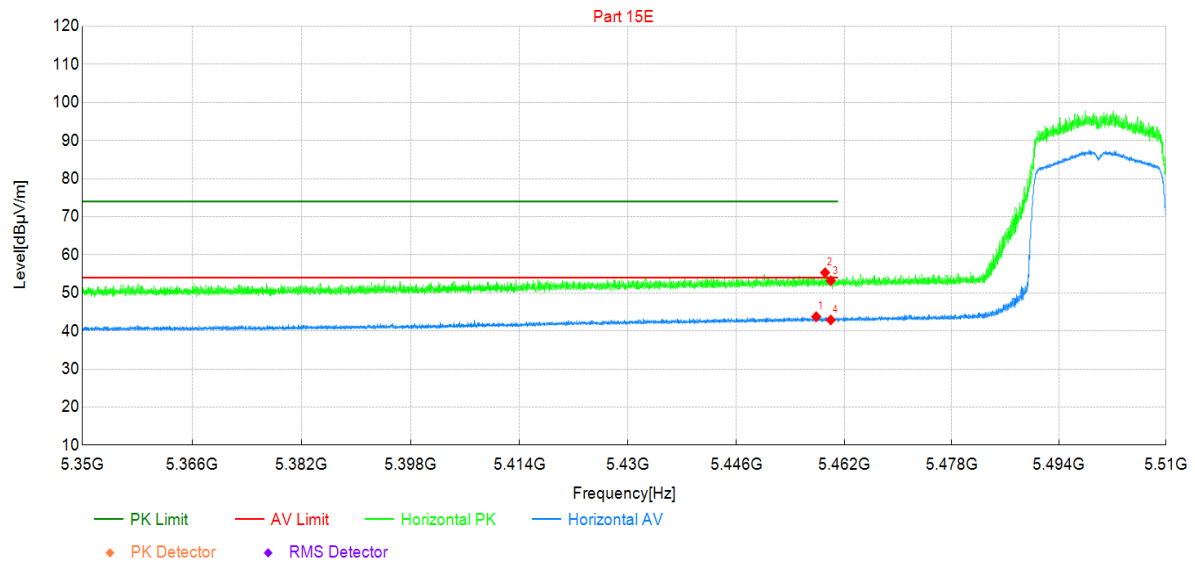

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.43	43.74	16.31	54.00	10.26	AV	Horizo	PASS
2	5459	38.98	55.31	16.33	74.00	18.69	PK	Horizo	PASS
3	5460	36.83	53.17	16.34	74.00	20.83	PK	Horizo	PASS
4	5460	26.53	42.87	16.34	54.00	11.13	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5500MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

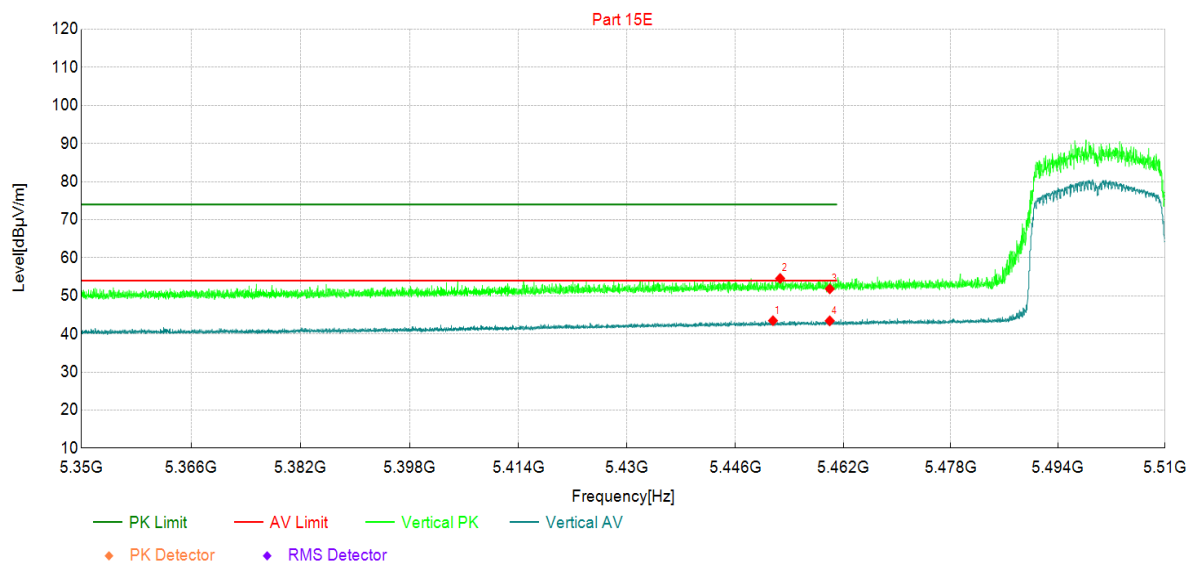

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5452	27.24	43.48	16.24	54.00	10.52	AV	Vertic	PASS
2	5453	38.33	54.58	16.25	74.00	19.42	PK	Vertic	PASS
3	5460	35.50	51.84	16.34	74.00	22.16	PK	Vertic	PASS
4	5460	27.10	43.44	16.34	54.00	10.56	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

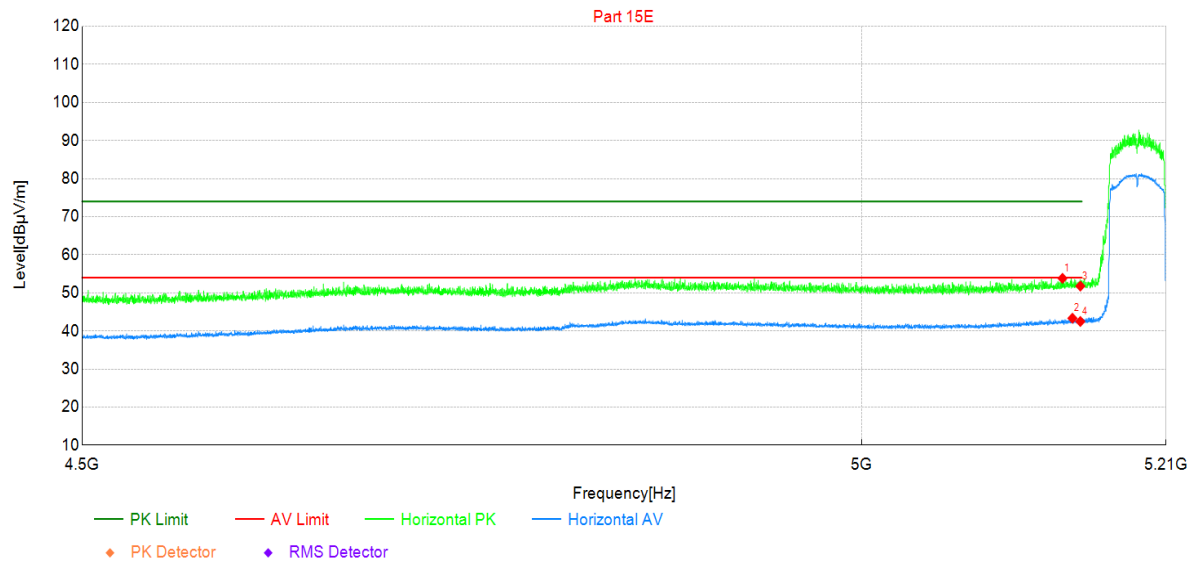

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5138	38.78	53.82	15.04	74.00	20.18	PK	Horizo	PASS
2	5145	28.26	43.34	15.08	54.00	10.66	AV	Horizo	PASS
3	5150	36.67	51.78	15.11	74.00	22.22	PK	Horizo	PASS
4	5150	27.38	42.49	15.11	54.00	11.51	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

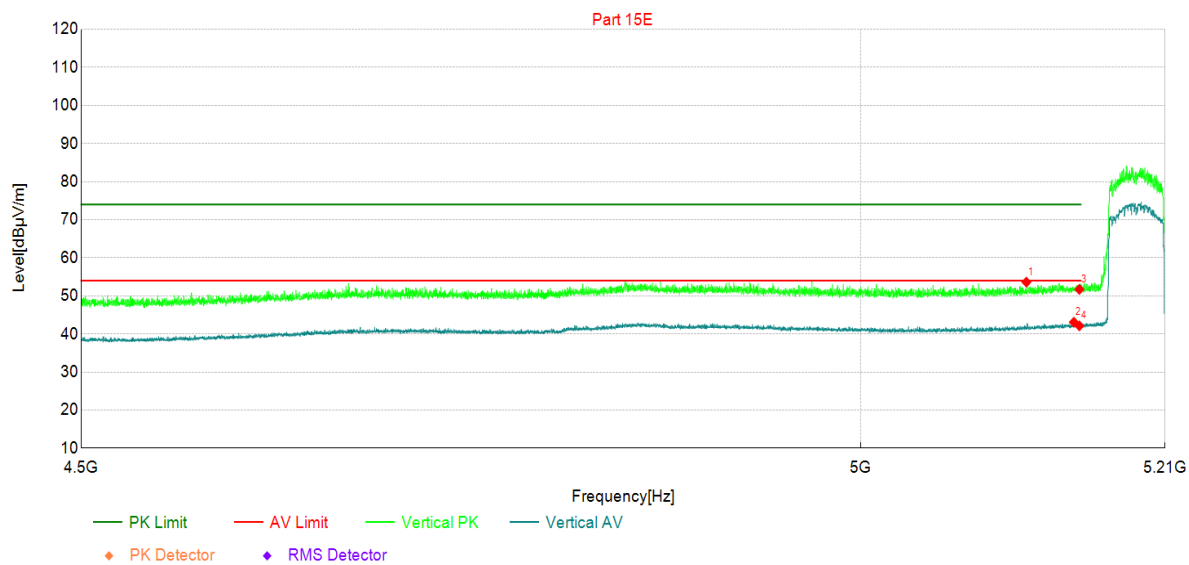

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5113	38.73	53.62	14.89	74.00	20.38	PK	Vertic	PASS
2	5146	27.99	43.08	15.09	54.00	10.92	AV	Vertic	PASS
3	5150	36.59	51.70	15.11	74.00	22.30	PK	Vertic	PASS
4	5150	27.02	42.13	15.11	54.00	11.87	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

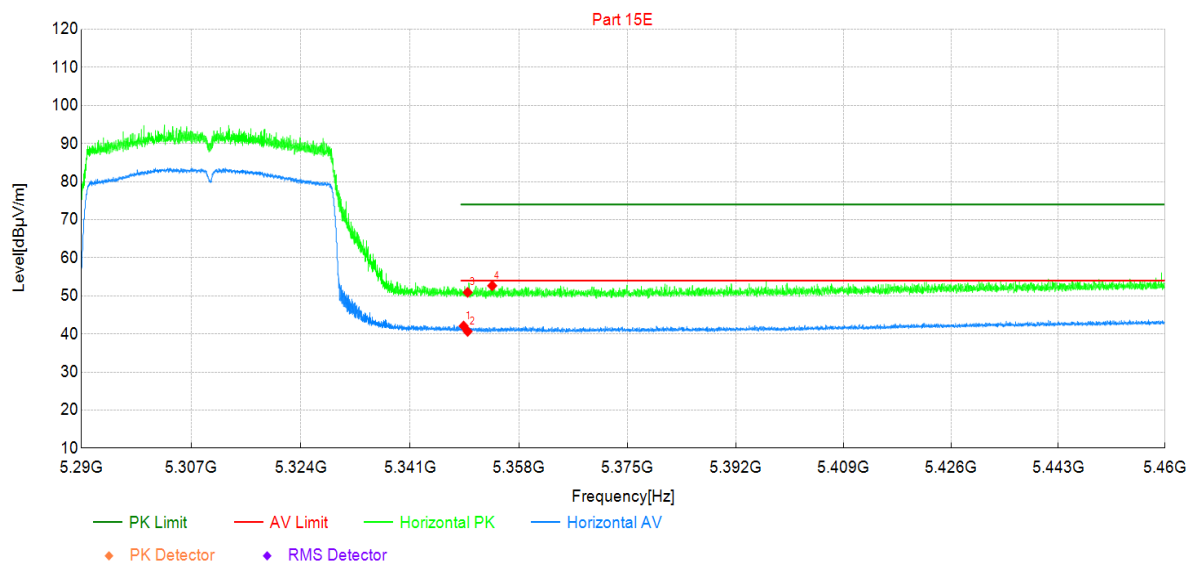

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	26.37	42.08	15.71	54.00	11.92	AV	Horizo	PASS
2	5350	24.95	40.66	15.71	54.00	13.34	AV	Horizo	PASS
3	5350	35.21	50.92	15.71	74.00	23.08	PK	Horizo	PASS
4	5354	36.95	52.65	15.70	74.00	21.35	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

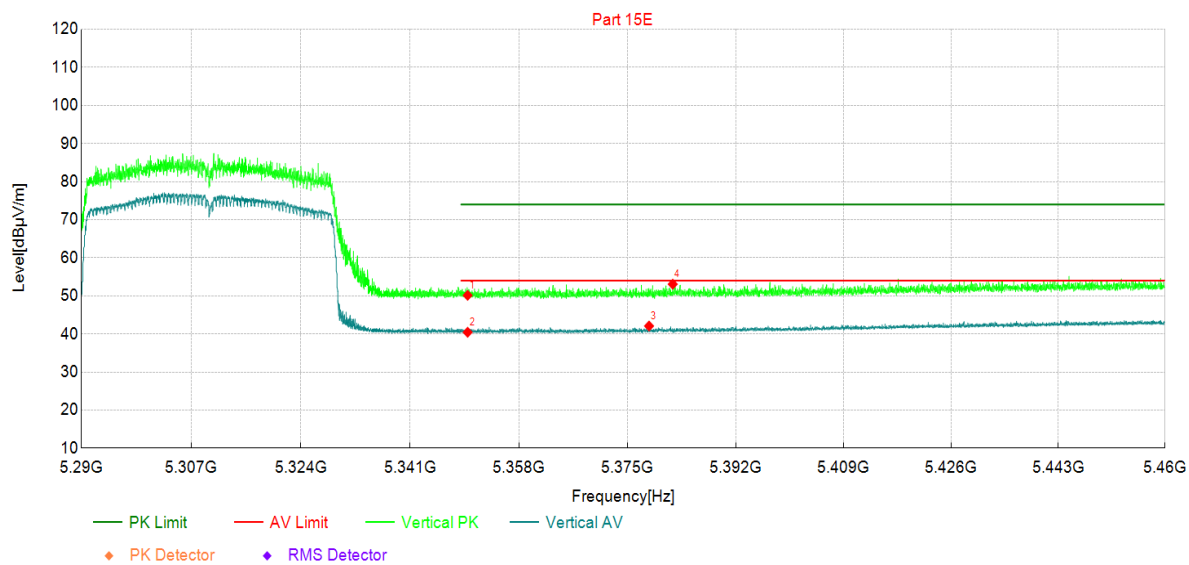

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.43	50.14	15.71	74.00	23.86	PK	Vertic	PASS
2	5350	24.73	40.44	15.71	54.00	13.56	AV	Vertic	PASS
3	5378	26.41	42.08	15.67	54.00	11.92	AV	Vertic	PASS
4	5382	37.39	53.07	15.68	74.00	20.93	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

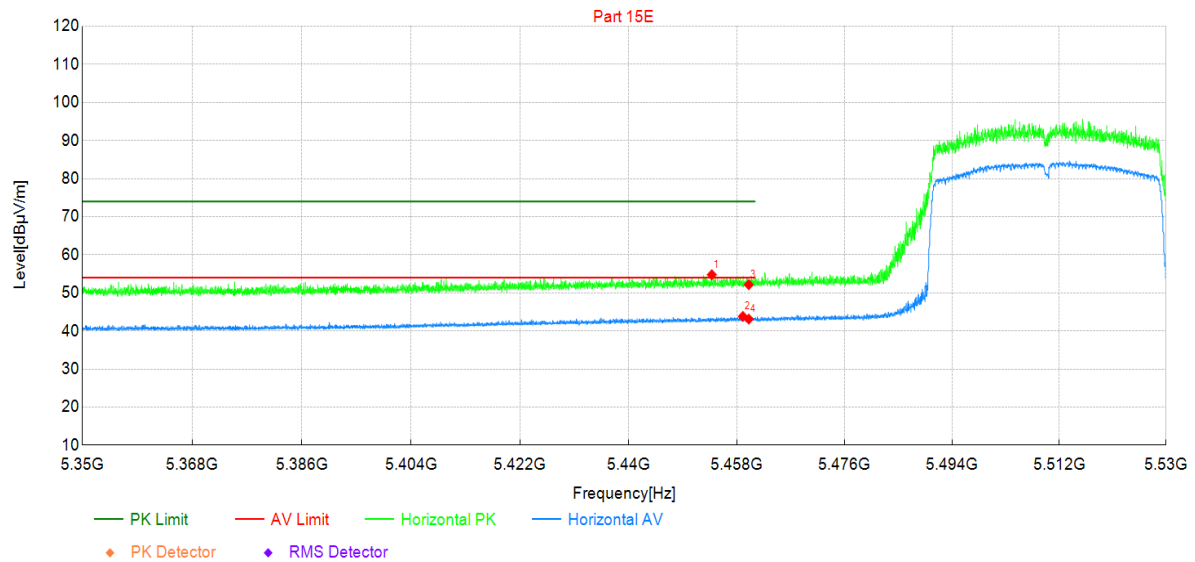

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5454	38.50	54.77	16.27	74.00	19.23	PK	Horizo	PASS
2	5459	27.48	43.81	16.33	54.00	10.19	AV	Horizo	PASS
3	5460	35.81	52.15	16.34	74.00	21.85	PK	Horizo	PASS
4	5460	26.77	43.11	16.34	54.00	10.89	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

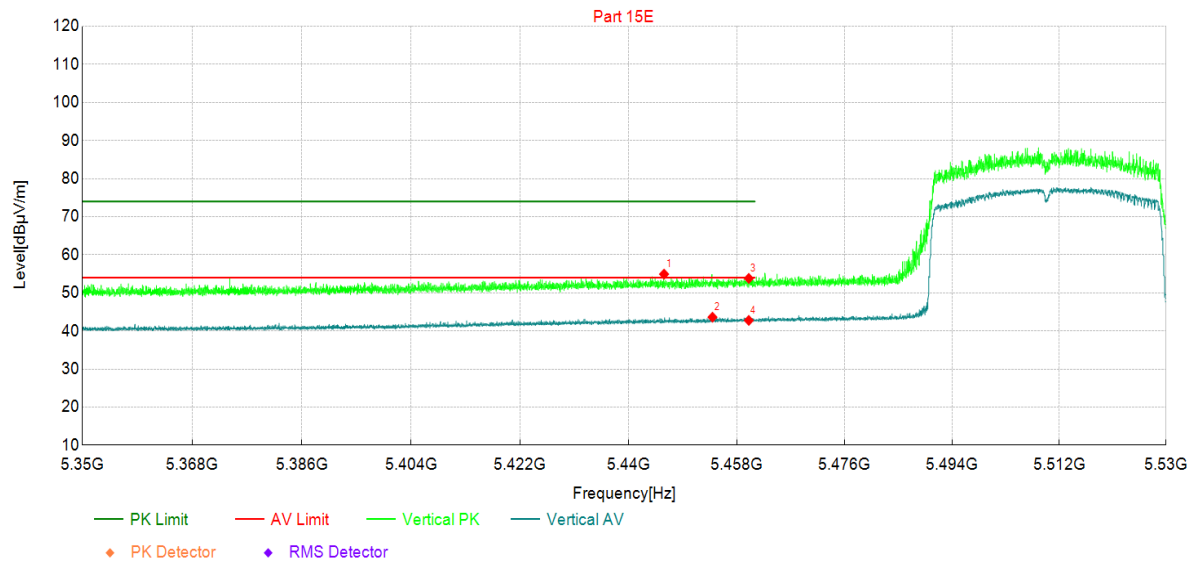

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5446	38.74	54.92	16.18	74.00	19.08	PK	Vertic	PASS
2	5454	27.34	43.61	16.27	54.00	10.39	AV	Vertic	PASS
3	5460	37.46	53.80	16.34	74.00	20.20	PK	Vertic	PASS
4	5460	26.43	42.77	16.34	54.00	11.23	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

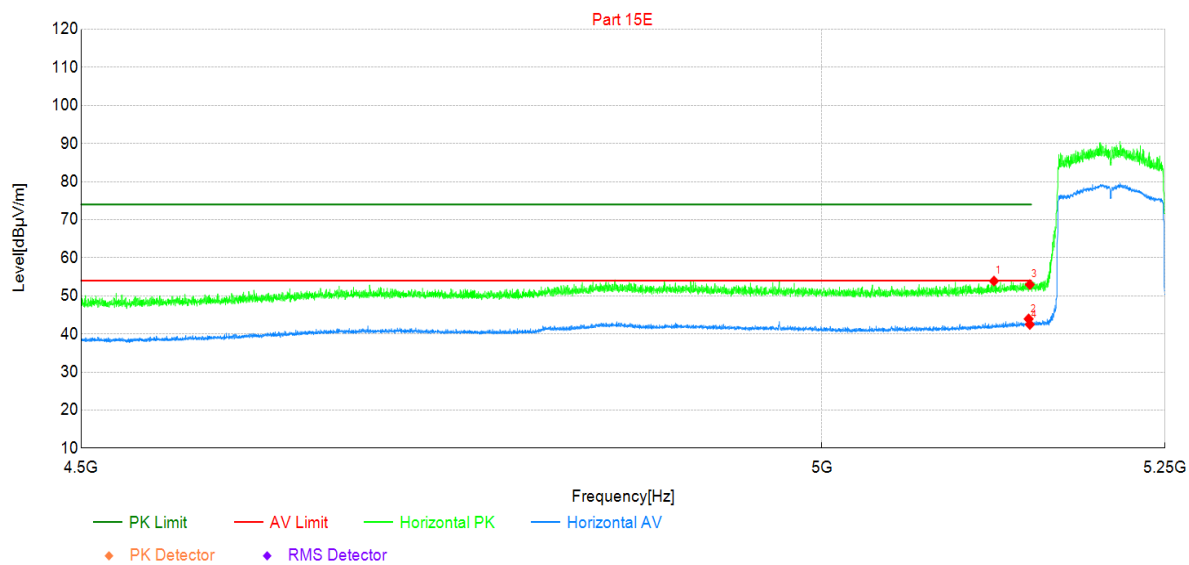

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5124	38.93	53.89	14.96	74.00	20.11	PK	Horizo	PASS
2	5149	28.84	43.94	15.10	54.00	10.06	AV	Horizo	PASS
3	5150	37.85	52.96	15.11	74.00	21.04	PK	Horizo	PASS
4	5150	27.38	42.49	15.11	54.00	11.51	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

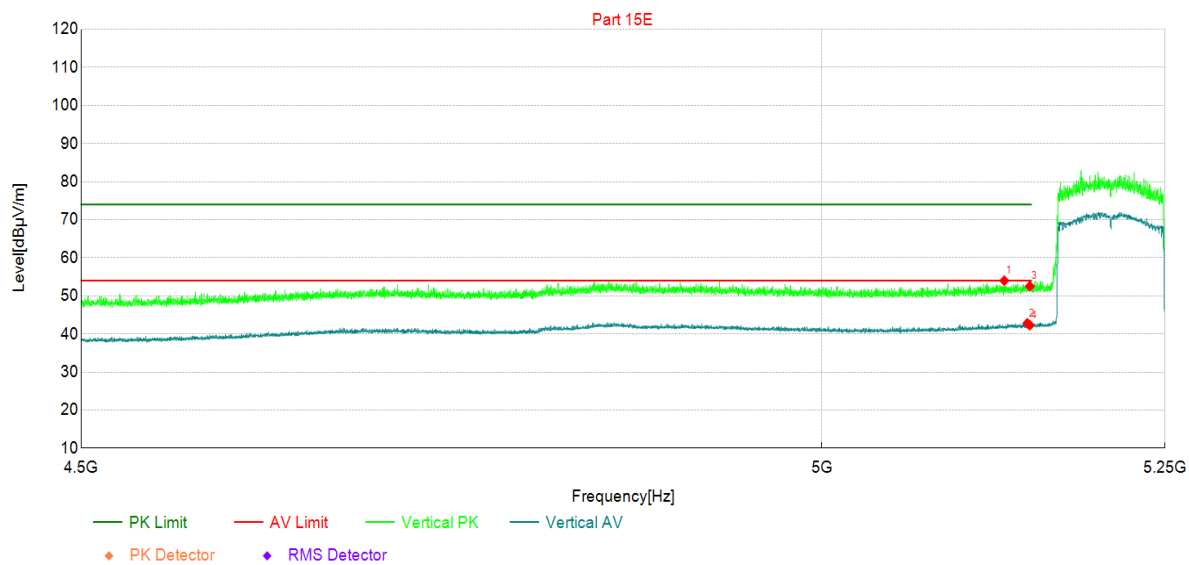

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5131	38.99	53.99	15.00	74.00	20.01	PK	Vertic	PASS
2	5148	27.69	42.79	15.10	54.00	11.21	AV	Vertic	PASS
3	5150	37.40	52.51	15.11	74.00	21.49	PK	Vertic	PASS
4	5150	27.19	42.30	15.11	54.00	11.70	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

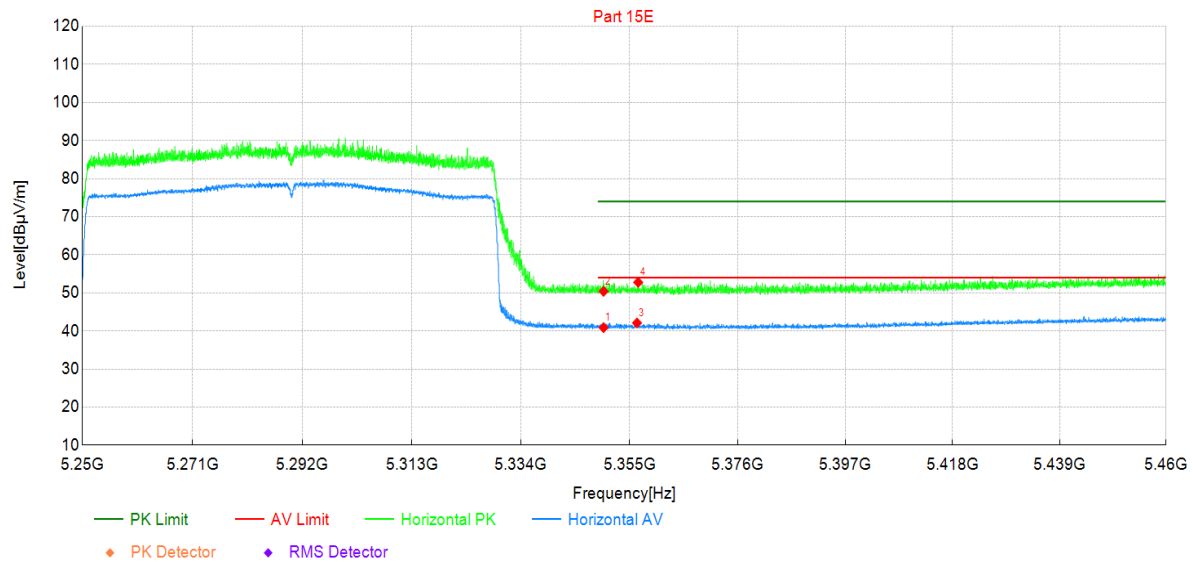

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	25.16	40.87	15.71	54.00	13.13	AV	Horizo	PASS
2	5350	34.70	50.41	15.71	74.00	23.59	PK	Horizo	PASS
3	5356	26.40	42.10	15.70	54.00	11.90	AV	Horizo	PASS
4	5357	37.06	52.76	15.70	74.00	21.24	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

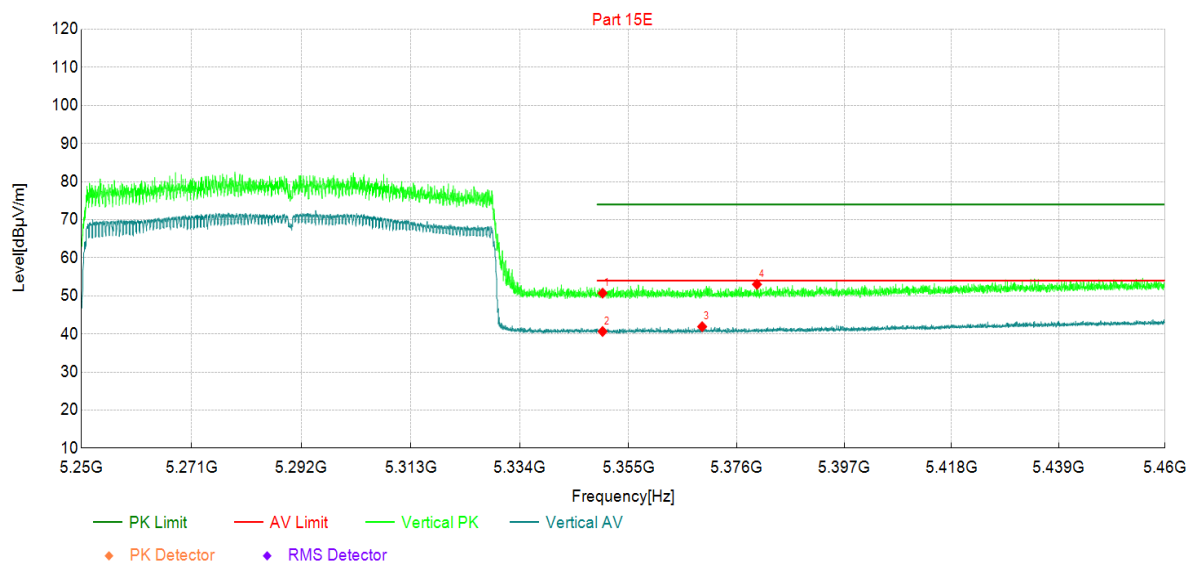


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.01	50.72	15.71	74.00	23.28	PK	Vertic	PASS
2	5350	24.93	40.64	15.71	54.00	13.36	AV	Vertic	PASS
3	5369	26.23	41.91	15.68	54.00	12.09	AV	Vertic	PASS
4	5380	37.35	53.02	15.67	74.00	20.98	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

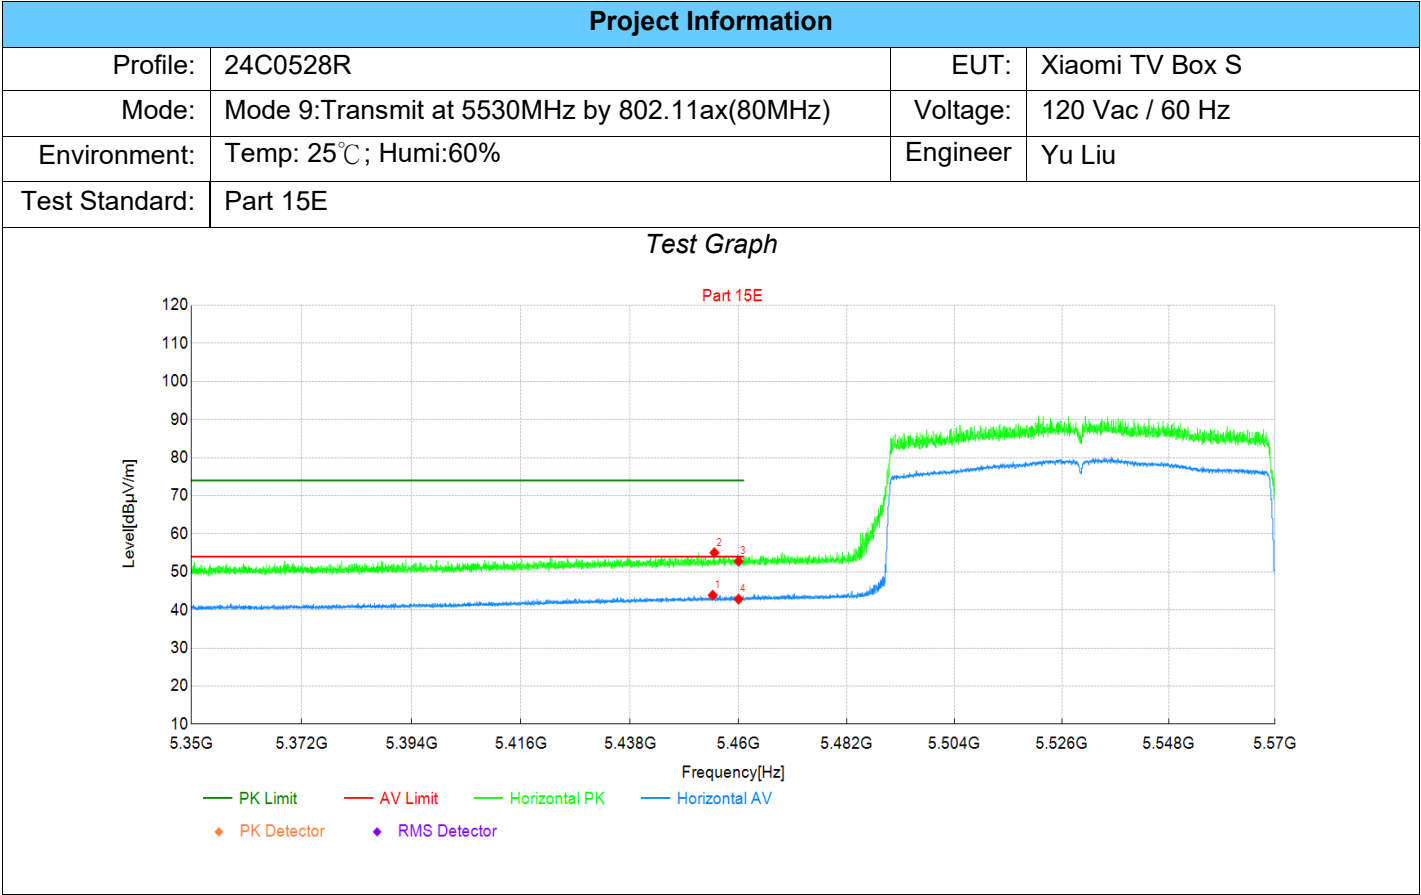

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5455	27.60	43.88	16.28	54.00	10.12	AV	Horizo	PASS
2	5455	38.73	55.02	16.29	74.00	18.98	PK	Horizo	PASS
3	5460	36.44	52.78	16.34	74.00	21.22	PK	Horizo	PASS
4	5460	26.49	42.83	16.34	54.00	11.17	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

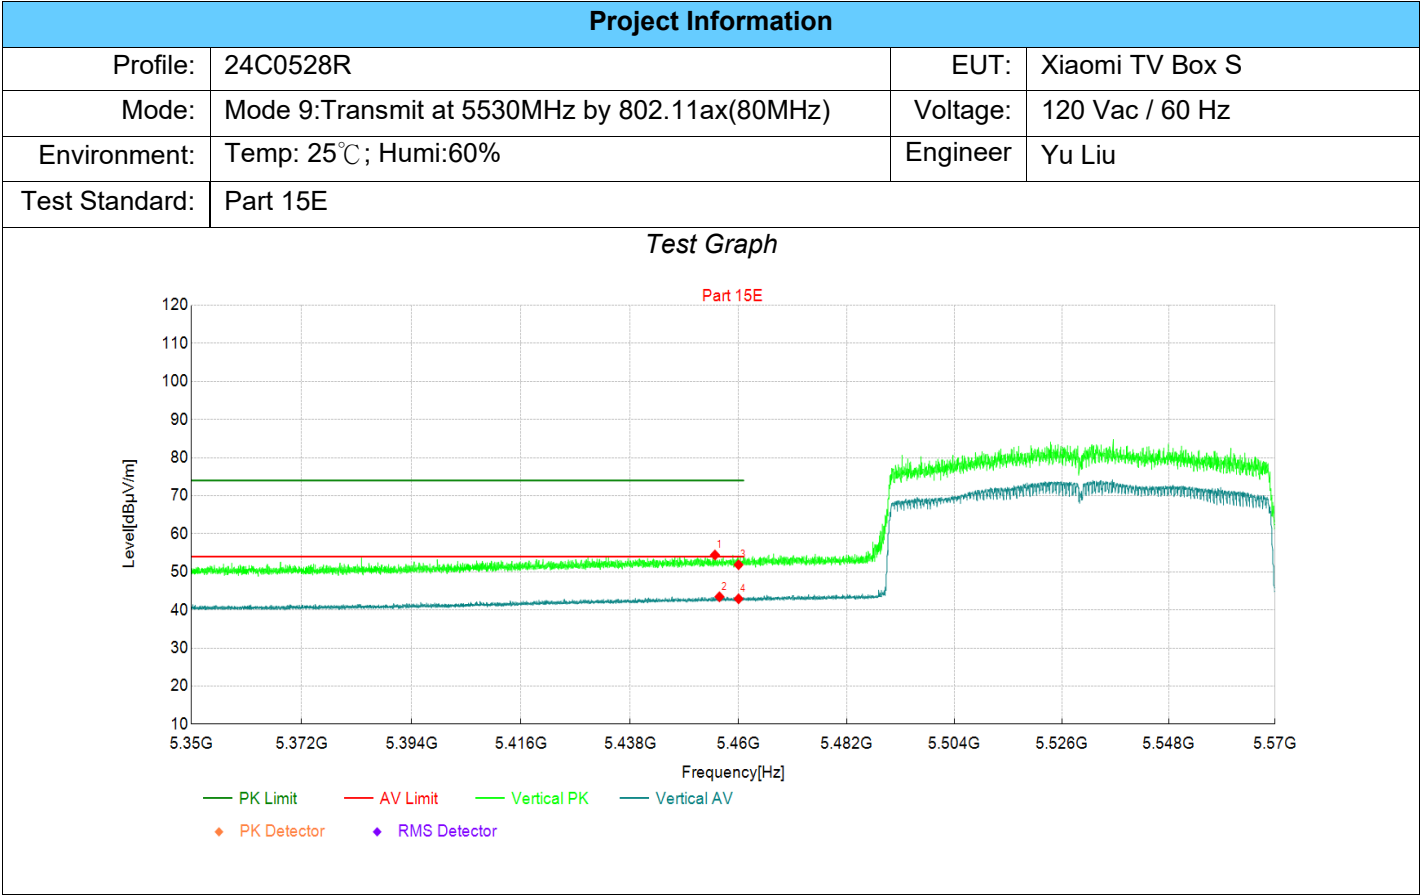

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5455	38.14	54.43	16.29	74.00	19.57	PK	Vertic	PASS
2	5456	27.15	43.45	16.30	54.00	10.55	AV	Vertic	PASS
3	5460	35.53	51.87	16.34	74.00	22.13	PK	Vertic	PASS
4	5460	26.59	42.93	16.34	54.00	11.07	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5745MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

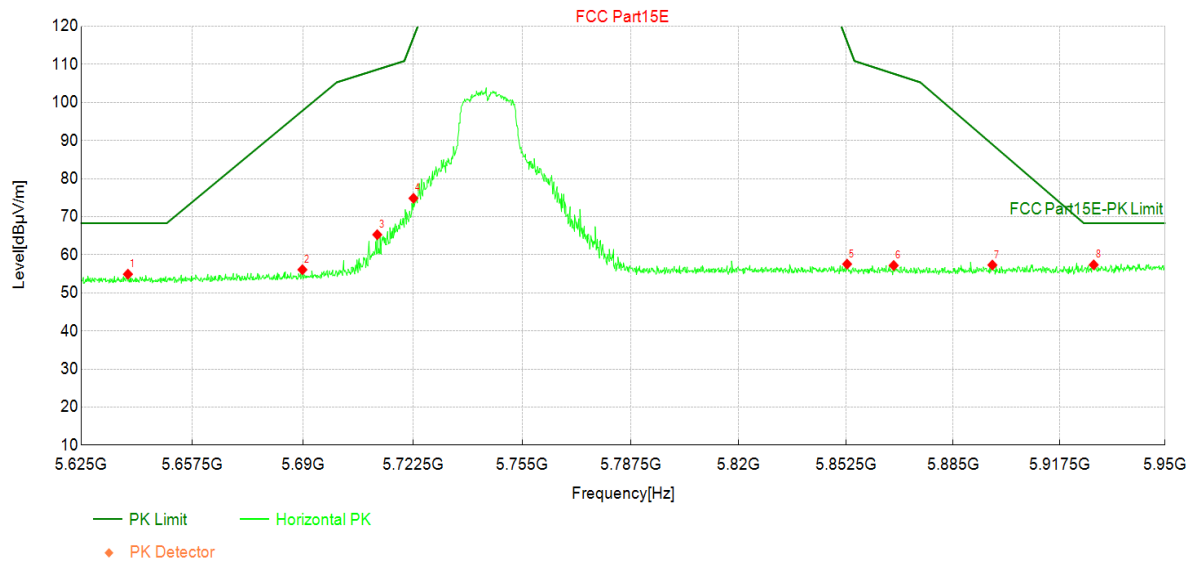

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.81	54.91	18.10	68.30	13.39	PK	Horizo	PASS
2	5690	37.47	56.08	18.61	97.83	41.75	PK	Horizo	PASS
3	5712	46.60	65.29	18.69	108.66	43.37	PK	Horizo	PASS
4	5723	56.18	74.85	18.67	117.08	42.23	PK	Horizo	PASS
5	5853	38.59	57.55	18.96	115.97	58.42	PK	Horizo	PASS
6	5867	38.12	57.19	19.07	107.56	50.37	PK	Horizo	PASS
7	5897	38.01	57.32	19.31	88.98	31.66	PK	Horizo	PASS
8	5928	37.82	57.37	19.55	68.30	10.93	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5745MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

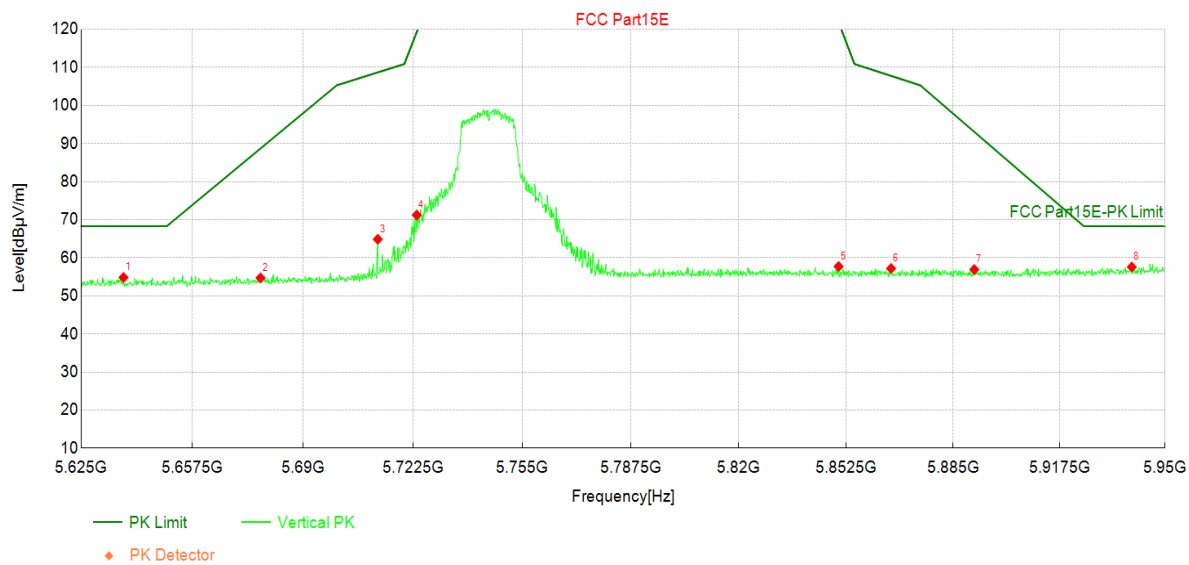

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.74	54.83	18.09	68.30	13.47	PK	Vertic	PASS
2	5678	36.23	54.72	18.49	88.70	33.98	PK	Vertic	PASS
3	5712	46.17	64.86	18.69	108.70	43.84	PK	Vertic	PASS
4	5724	52.56	71.23	18.67	119.31	48.08	PK	Vertic	PASS
5	5850	38.77	57.72	18.95	121.90	64.18	PK	Vertic	PASS
6	5866	38.13	57.20	19.07	107.79	50.59	PK	Vertic	PASS
7	5891	37.65	56.92	19.27	93.08	36.16	PK	Vertic	PASS
8	5940	37.94	57.58	19.64	68.30	10.72	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5785MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

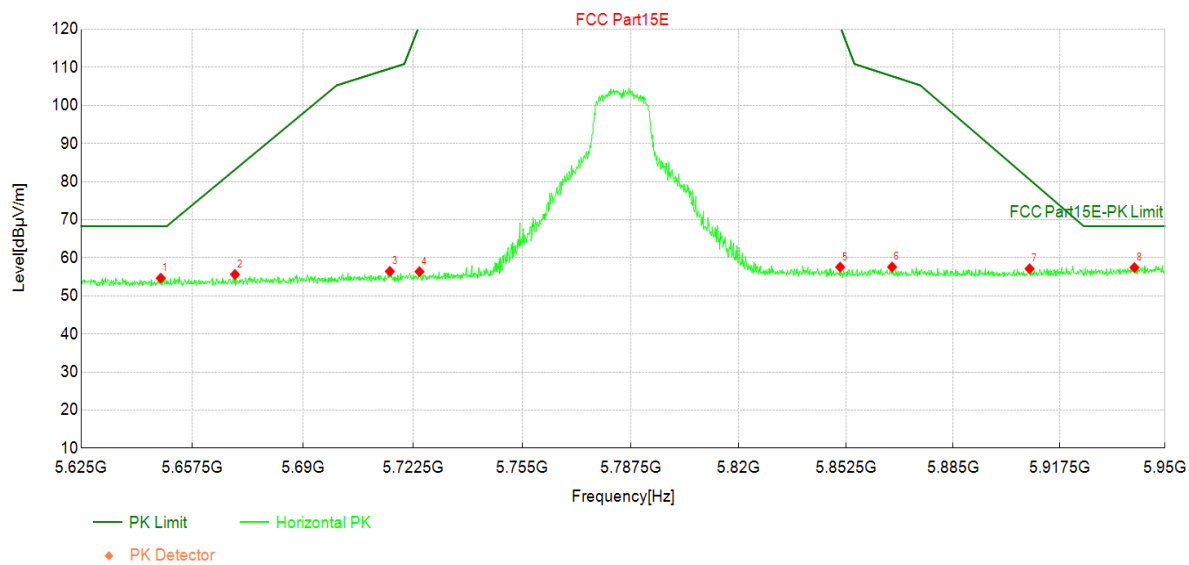

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648	36.46	54.65	18.19	68.30	13.65	PK	Horizo	PASS
2	5670	37.21	55.62	18.41	83.17	27.55	PK	Horizo	PASS
3	5716	37.74	56.43	18.69	109.70	53.27	PK	Horizo	PASS
4	5724	37.70	56.37	18.67	121.16	64.79	PK	Horizo	PASS
5	5851	38.61	57.56	18.95	120.79	63.23	PK	Horizo	PASS
6	5866	38.52	57.59	19.07	107.70	50.11	PK	Horizo	PASS
7	5908	37.72	57.12	19.40	80.56	23.44	PK	Horizo	PASS
8	5941	37.78	57.43	19.65	68.30	10.87	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5785MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

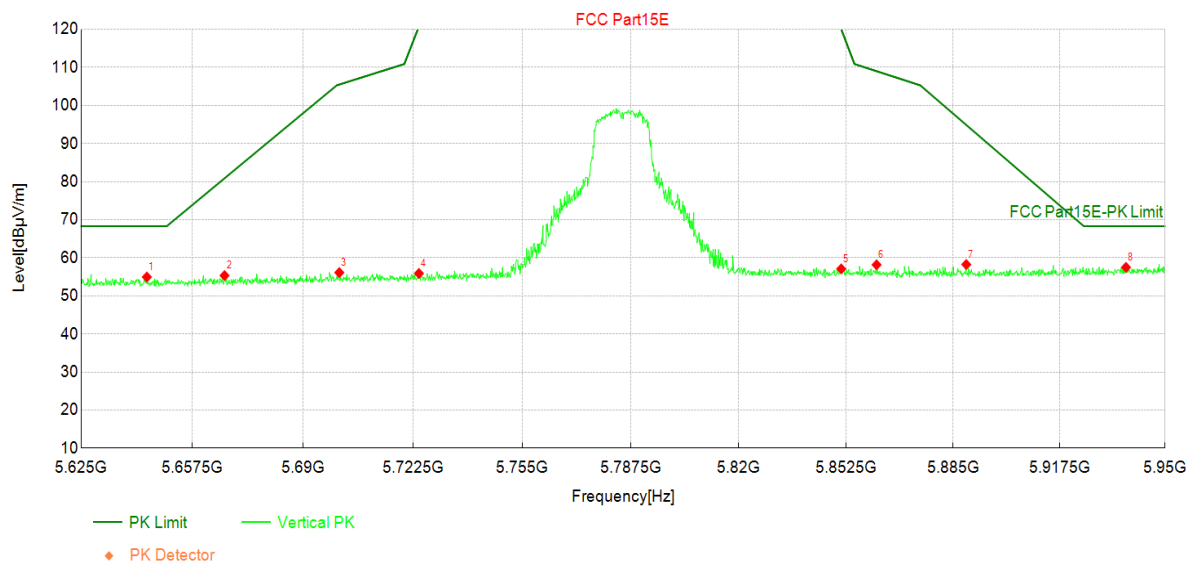

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	36.80	54.95	18.15	68.30	13.35	PK	Vertic	PASS
2	5667	36.96	55.34	18.38	80.88	25.54	PK	Vertic	PASS
3	5701	37.40	56.11	18.71	105.51	49.40	PK	Vertic	PASS
4	5724	37.22	55.89	18.67	120.79	64.90	PK	Vertic	PASS
5	5851	38.13	57.08	18.95	120.05	62.97	PK	Vertic	PASS
6	5862	39.13	58.16	19.03	109.02	50.86	PK	Vertic	PASS
7	5889	38.99	58.24	19.25	94.88	36.64	PK	Vertic	PASS
8	5938	37.86	57.49	19.63	68.30	10.81	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5825MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

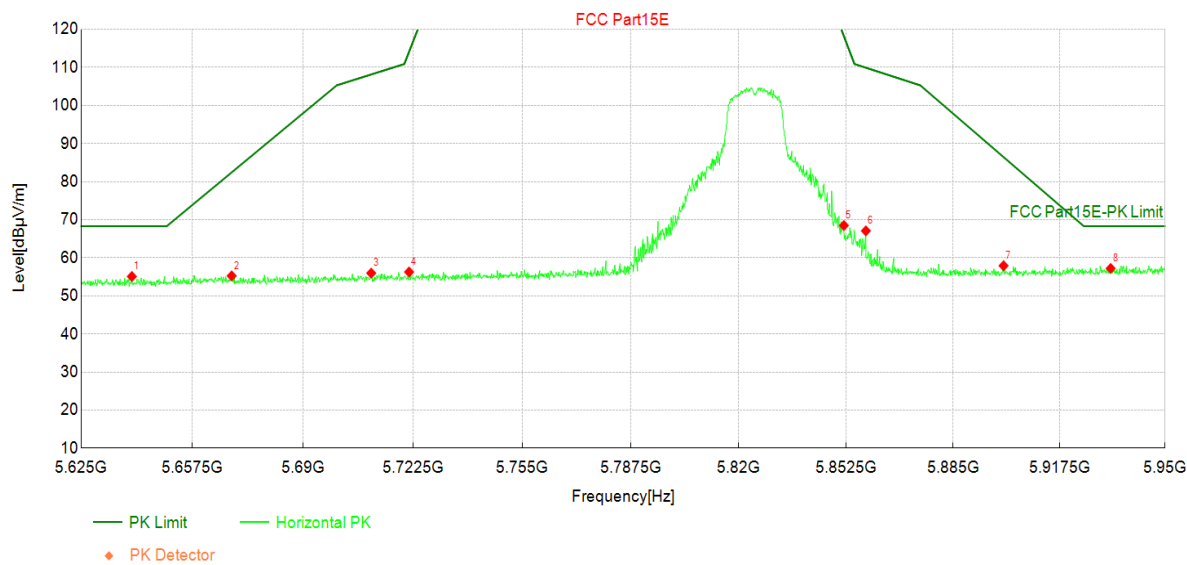

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.98	55.09	18.11	68.30	13.21	PK	Horizo	PASS
2	5669	36.85	55.25	18.40	82.44	27.19	PK	Horizo	PASS
3	5710	37.28	55.97	18.69	108.16	52.19	PK	Horizo	PASS
4	5721	37.61	56.28	18.67	114.12	57.84	PK	Horizo	PASS
5	5852	49.53	68.49	18.96	118.19	49.70	PK	Horizo	PASS
6	5858	48.08	67.08	19.00	109.93	42.85	PK	Horizo	PASS
7	5900	38.58	57.92	19.34	86.46	28.54	PK	Horizo	PASS
8	5933	37.60	57.20	19.60	68.30	11.10	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 1:Transmit at 5825MHz by 802.11a	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

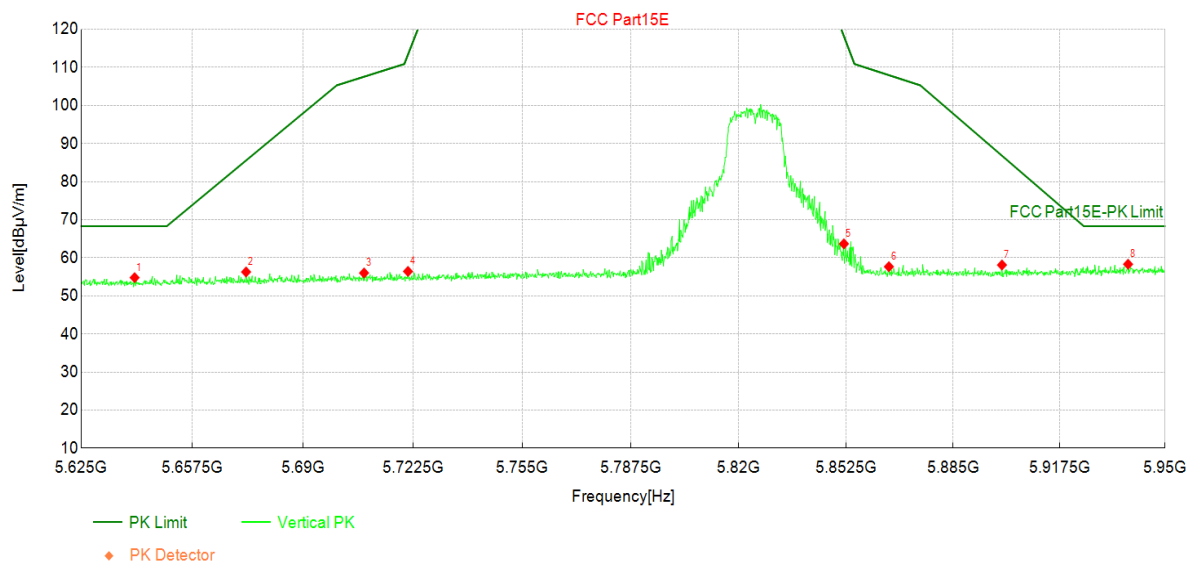

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.68	54.79	18.11	68.30	13.51	PK	Vertic	PASS
2	5673	37.84	56.28	18.44	85.57	29.29	PK	Vertic	PASS
3	5708	37.31	56.01	18.70	107.56	51.55	PK	Vertic	PASS
4	5721	37.74	56.42	18.68	113.38	56.96	PK	Vertic	PASS
5	5852	44.70	63.66	18.96	118.19	54.53	PK	Vertic	PASS
6	5865	38.59	57.65	19.06	107.97	50.32	PK	Vertic	PASS
7	5900	38.77	58.11	19.34	86.82	28.71	PK	Vertic	PASS
8	5939	38.68	58.31	19.63	68.30	9.99	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

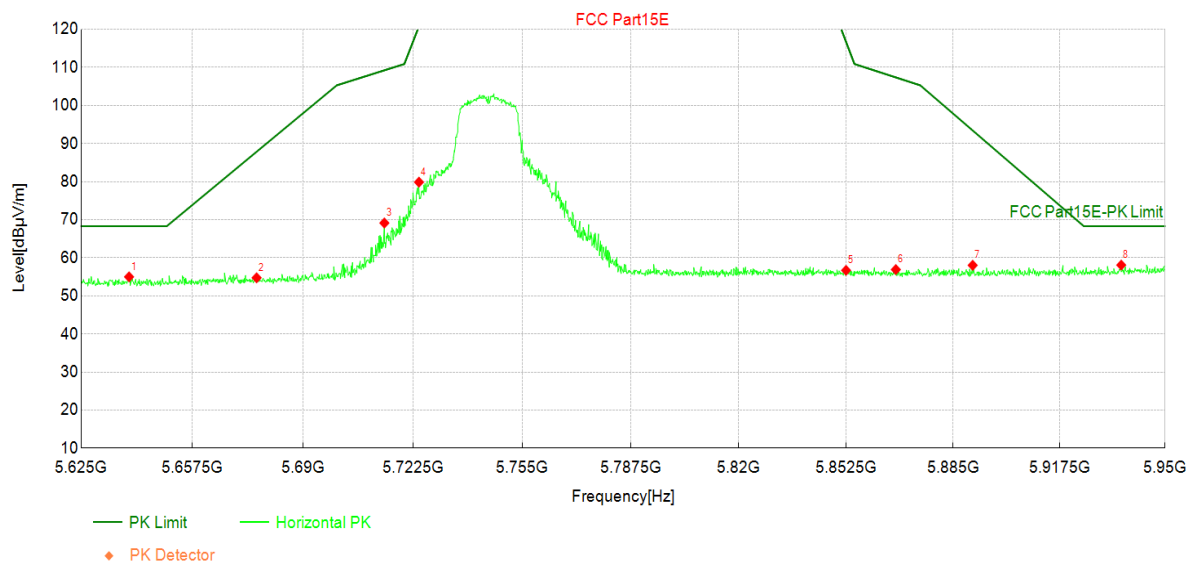

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.89	54.99	18.10	68.30	13.31	PK	Horizo	PASS
2	5676	36.27	54.75	18.48	87.86	33.11	PK	Horizo	PASS
3	5714	50.46	69.14	18.68	109.25	40.11	PK	Horizo	PASS
4	5724	61.20	79.87	18.67	120.79	40.92	PK	Horizo	PASS
5	5852	37.74	56.70	18.96	116.71	60.01	PK	Horizo	PASS
6	5868	37.81	56.90	19.09	107.38	50.48	PK	Horizo	PASS
7	5891	38.76	58.03	19.27	93.44	35.41	PK	Horizo	PASS
8	5937	38.48	58.09	19.61	68.30	10.21	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

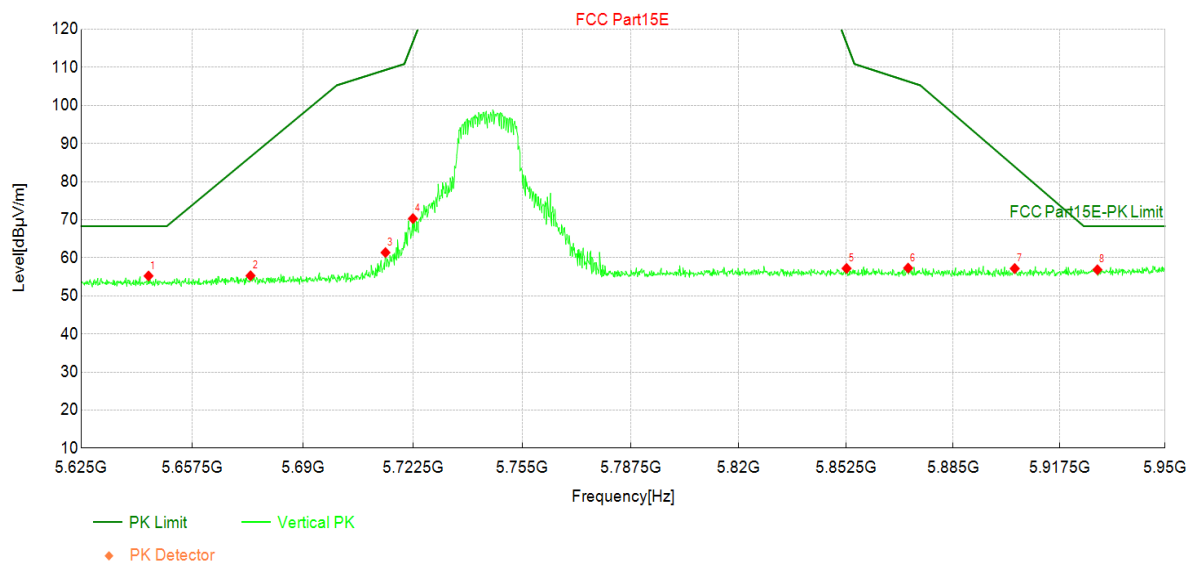

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5645	37.08	55.23	18.15	68.30	13.07	PK	Vertic	PASS
2	5675	36.84	55.29	18.45	86.54	31.25	PK	Vertic	PASS
3	5714	42.69	61.37	18.68	109.34	47.97	PK	Vertic	PASS
4	5723	51.63	70.30	18.67	116.71	46.41	PK	Vertic	PASS
5	5853	38.25	57.21	18.96	116.34	59.13	PK	Vertic	PASS
6	5871	38.19	57.30	19.11	106.33	49.03	PK	Vertic	PASS
7	5904	37.81	57.18	19.37	83.93	26.75	PK	Vertic	PASS
8	5929	37.31	56.87	19.56	68.30	11.43	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

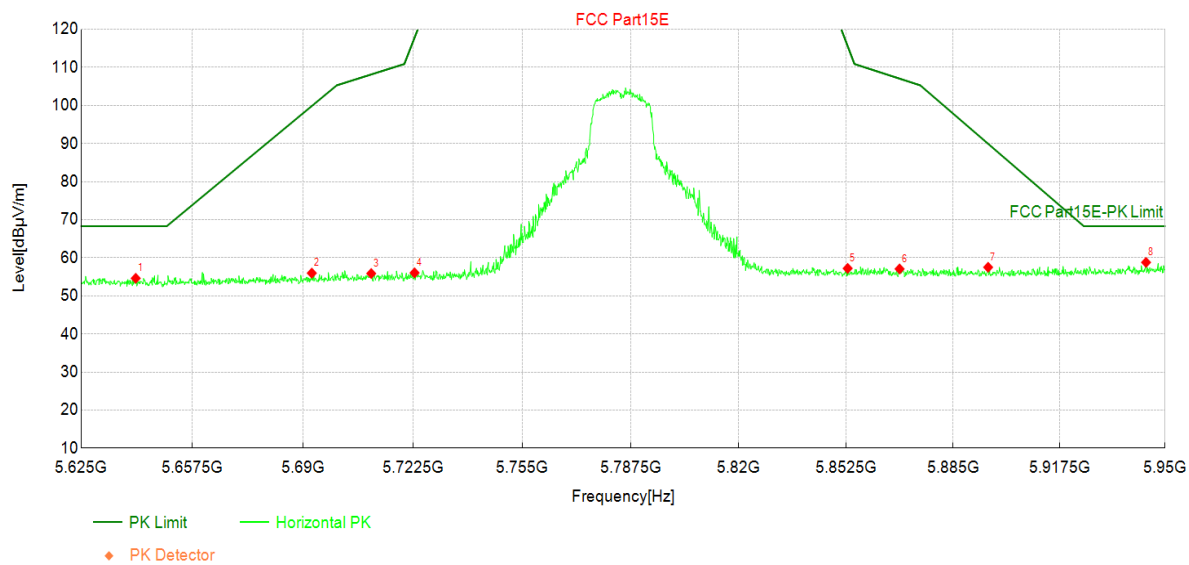

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.50	54.62	18.12	68.30	13.68	PK	Horizo	PASS
2	5693	37.34	55.97	18.63	99.87	43.90	PK	Horizo	PASS
3	5710	37.18	55.87	18.69	108.16	52.29	PK	Horizo	PASS
4	5723	37.38	56.05	18.67	117.82	61.77	PK	Horizo	PASS
5	5853	38.26	57.22	18.96	115.60	58.38	PK	Horizo	PASS
6	5869	37.98	57.07	19.09	107.06	49.99	PK	Horizo	PASS
7	5896	38.20	57.51	19.31	89.95	32.44	PK	Horizo	PASS
8	5944	39.13	58.80	19.67	68.30	9.50	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

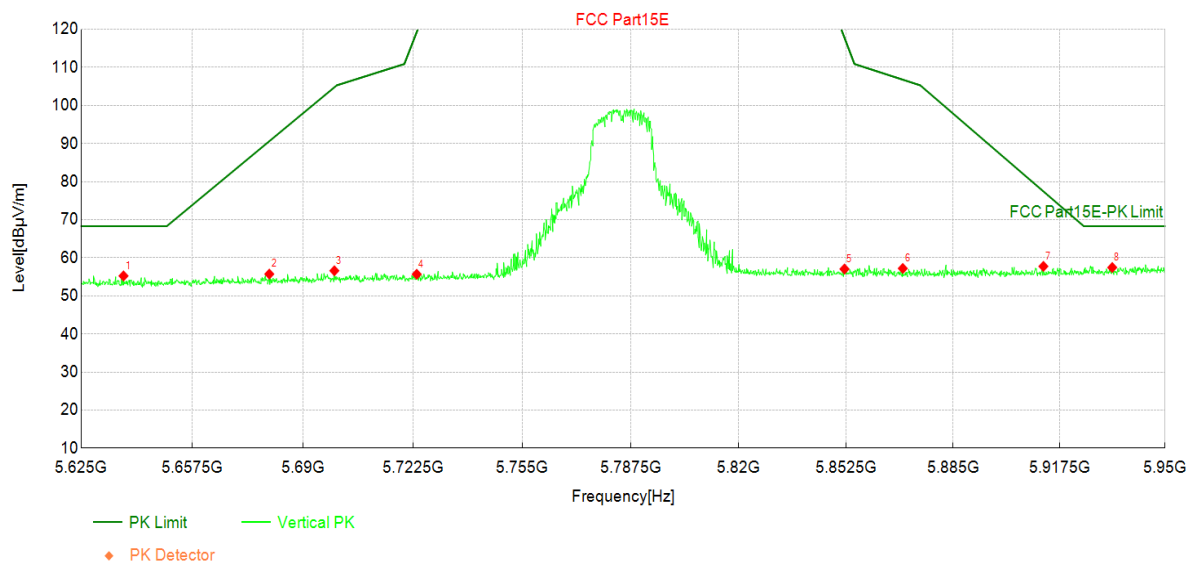

Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	37.14	55.23	18.09	68.30	13.07	PK	Vertic	PASS
2	5680	37.22	55.73	18.51	90.62	34.89	PK	Vertic	PASS
3	5699	37.91	56.61	18.70	104.78	48.17	PK	Vertic	PASS
4	5724	37.00	55.67	18.67	119.31	63.64	PK	Vertic	PASS
5	5852	38.09	57.05	18.96	117.82	60.77	PK	Vertic	PASS
6	5870	38.10	57.20	19.10	106.79	49.59	PK	Vertic	PASS
7	5913	38.31	57.75	19.44	77.44	19.69	PK	Vertic	PASS
8	5934	37.85	57.45	19.60	68.30	10.85	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

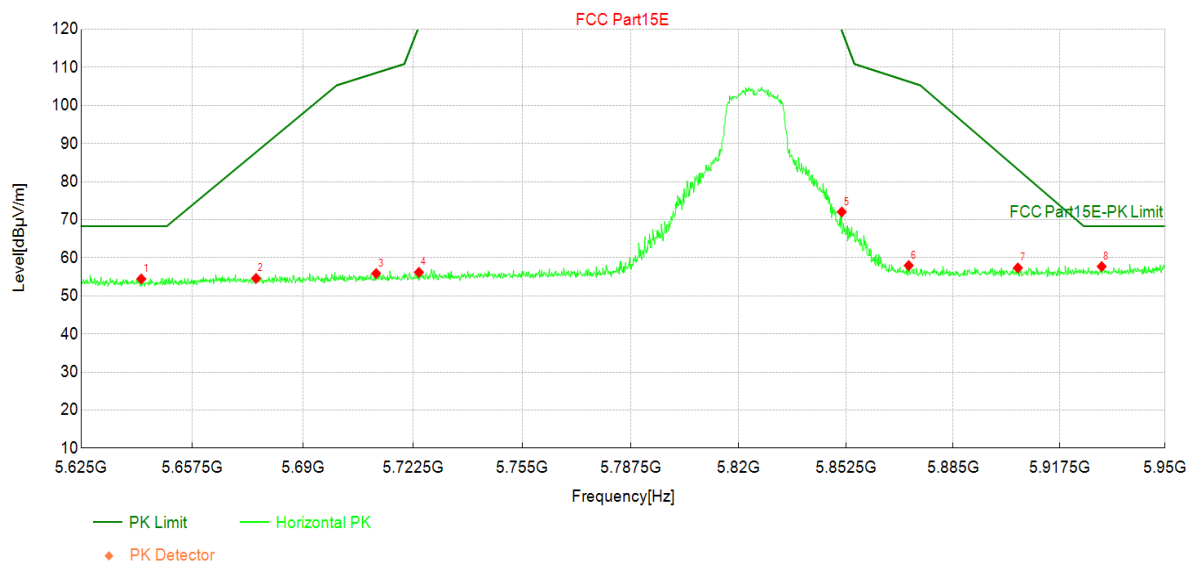

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.30	54.44	18.14	68.30	13.86	PK	Horizo	PASS
2	5676	36.11	54.59	18.48	87.74	33.15	PK	Horizo	PASS
3	5712	37.19	55.88	18.69	108.57	52.69	PK	Horizo	PASS
4	5724	37.51	56.18	18.67	120.79	64.61	PK	Horizo	PASS
5	5851	53.10	72.05	18.95	119.68	47.63	PK	Horizo	PASS
6	5871	38.87	57.98	19.11	106.29	48.31	PK	Horizo	PASS
7	5905	37.97	57.35	19.38	83.21	25.86	PK	Horizo	PASS
8	5930	38.15	57.72	19.57	68.30	10.58	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

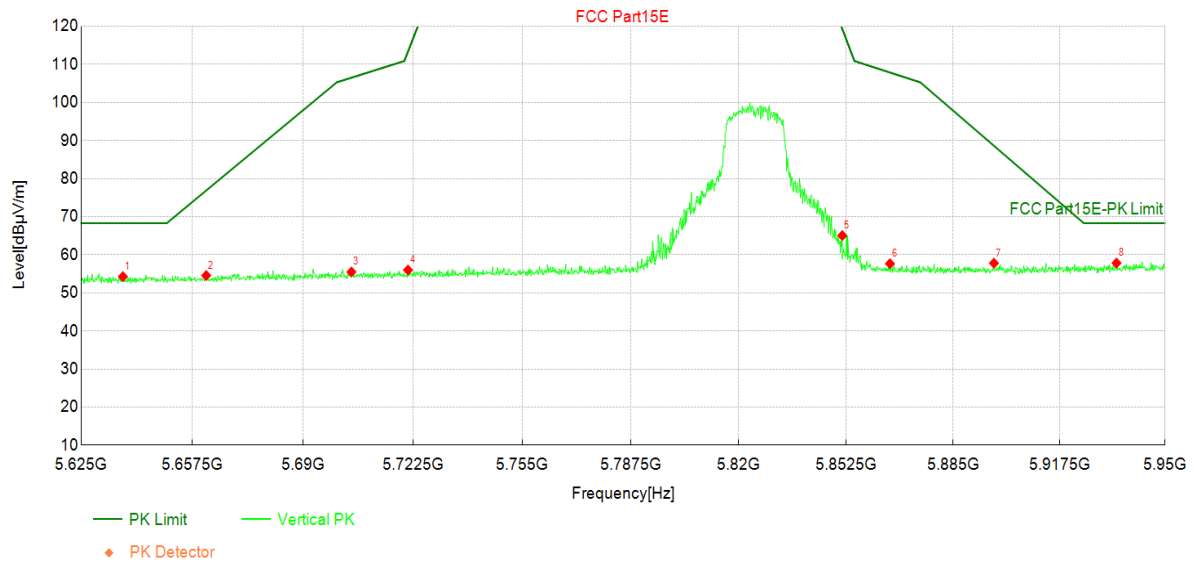

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.17	54.26	18.09	68.30	14.04	PK	Vertic	PASS
2	5662	36.24	54.56	18.32	76.90	22.34	PK	Vertic	PASS
3	5704	36.79	55.49	18.70	106.52	51.03	PK	Vertic	PASS
4	5721	37.31	55.99	18.68	113.38	57.39	PK	Vertic	PASS
5	5851	46.10	65.05	18.95	119.31	54.26	PK	Vertic	PASS
6	5866	38.60	57.66	19.06	107.88	50.22	PK	Vertic	PASS
7	5897	38.47	57.79	19.32	88.62	30.83	PK	Vertic	PASS
8	5935	38.22	57.83	19.61	68.30	10.47	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

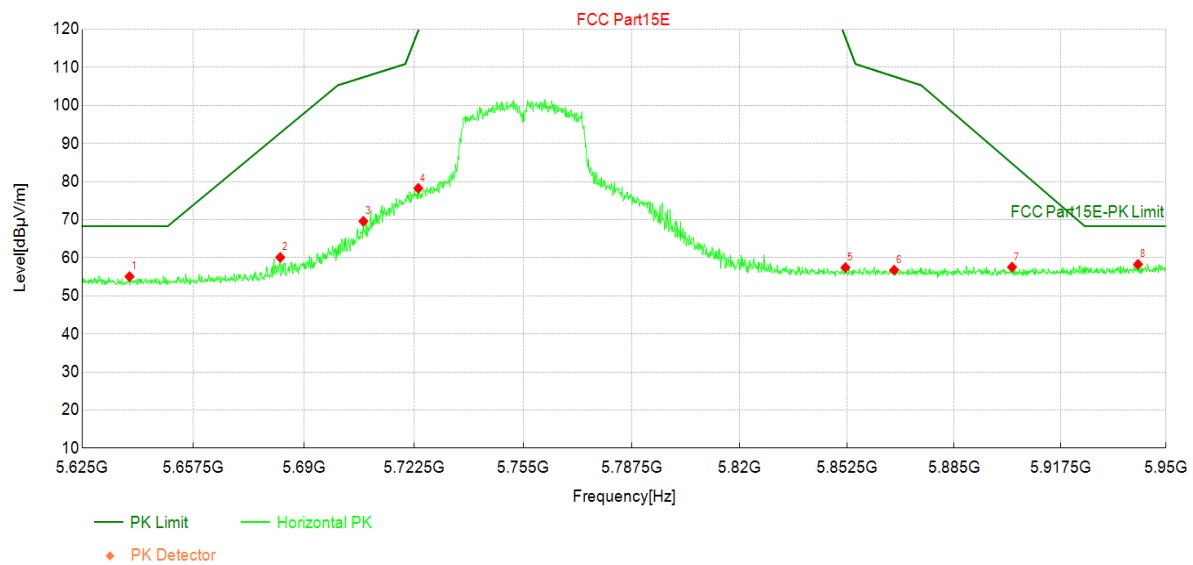

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.96	55.06	18.10	68.30	13.24	PK	Horizo	PASS
2	5683	41.56	60.10	18.54	92.79	32.69	PK	Horizo	PASS
3	5708	50.89	69.59	18.70	107.43	37.84	PK	Horizo	PASS
4	5724	59.59	78.25	18.66	119.68	41.43	PK	Horizo	PASS
5	5852	38.47	57.43	18.96	117.82	60.39	PK	Horizo	PASS
6	5867	37.70	56.77	19.07	107.61	50.84	PK	Horizo	PASS
7	5903	38.19	57.55	19.36	84.77	27.22	PK	Horizo	PASS
8	5941	38.62	58.28	19.66	68.30	10.02	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

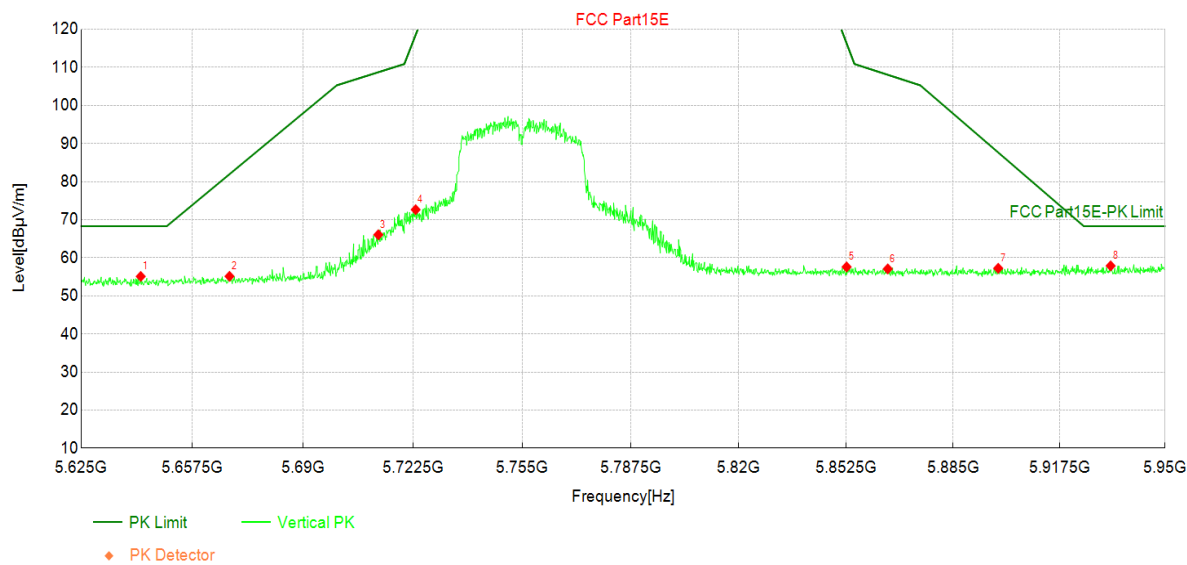

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.97	55.11	18.14	68.30	13.19	PK	Vertic	PASS
2	5668	36.73	55.13	18.40	81.96	26.83	PK	Vertic	PASS
3	5712	47.37	66.06	18.69	108.75	42.69	PK	Vertic	PASS
4	5723	53.97	72.64	18.67	118.57	45.93	PK	Vertic	PASS
5	5853	38.64	57.60	18.96	116.34	58.74	PK	Vertic	PASS
6	5865	38.02	57.08	19.06	108.06	50.98	PK	Vertic	PASS
7	5899	37.91	57.24	19.33	87.66	30.42	PK	Vertic	PASS
8	5933	38.28	57.88	19.60	68.30	10.42	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

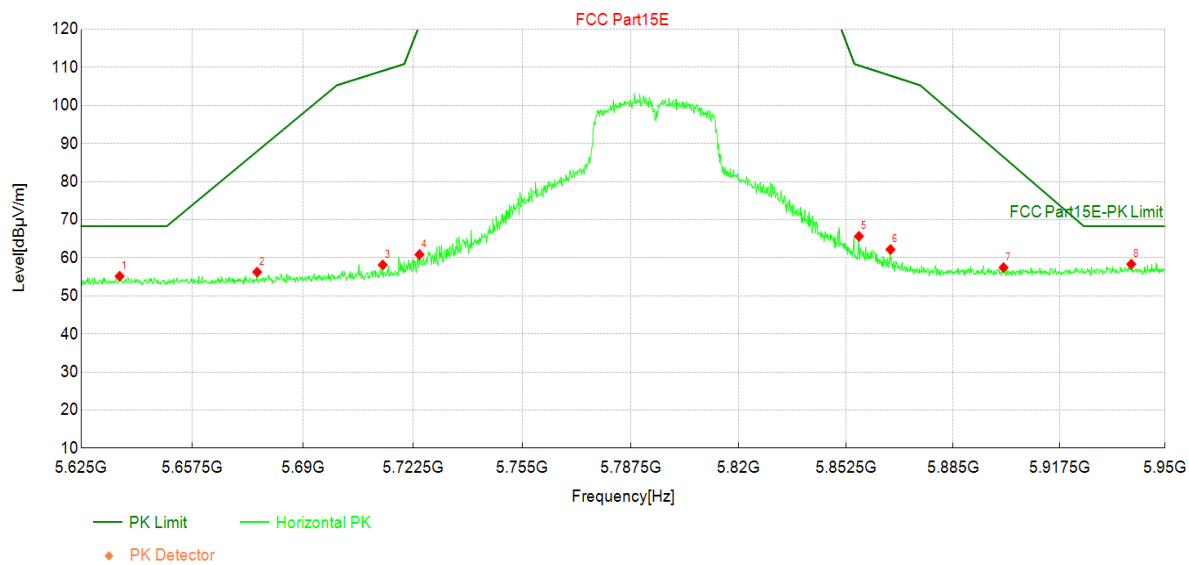

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	37.09	55.16	18.07	68.30	13.14	PK	Horizo	PASS
2	5677	37.77	56.25	18.48	87.98	31.73	PK	Horizo	PASS
3	5714	39.44	58.13	18.69	109.11	50.98	PK	Horizo	PASS
4	5724	42.18	60.85	18.67	121.16	60.31	PK	Horizo	PASS
5	5856	46.66	65.65	18.99	110.52	44.87	PK	Horizo	PASS
6	5866	43.12	62.19	19.07	107.83	45.64	PK	Horizo	PASS
7	5900	38.08	57.42	19.34	86.46	29.04	PK	Horizo	PASS
8	5940	38.70	58.34	19.64	68.30	9.96	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

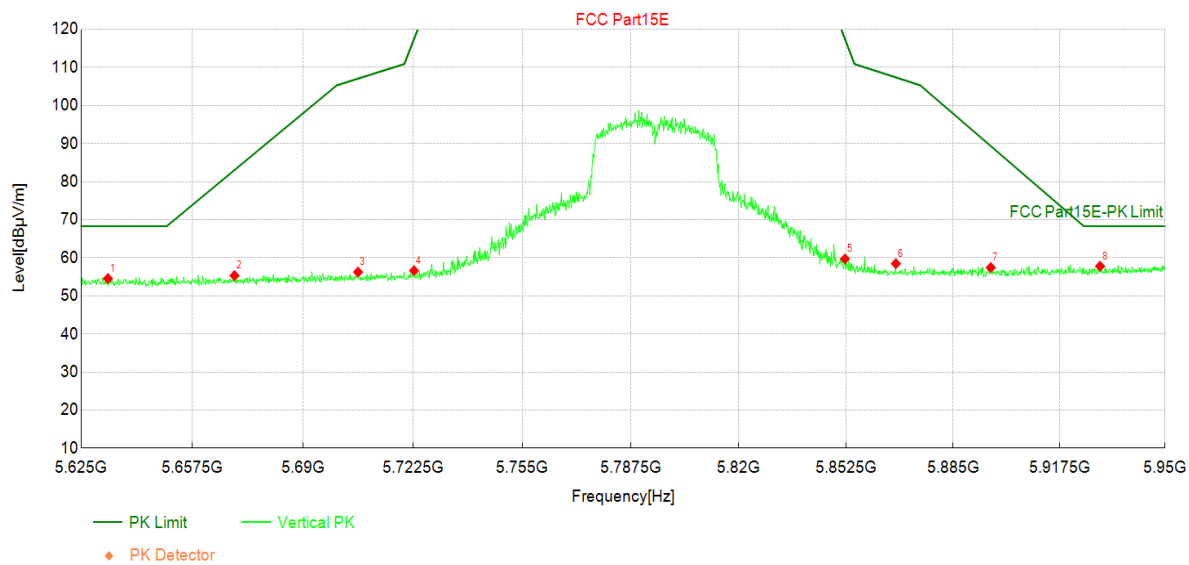

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5633	36.50	54.54	18.04	68.30	13.76	PK	Vertic	PASS
2	5670	36.91	55.32	18.41	83.04	27.72	PK	Vertic	PASS
3	5706	37.56	56.25	18.69	107.06	50.81	PK	Vertic	PASS
4	5723	37.95	56.62	18.67	117.45	60.83	PK	Vertic	PASS
5	5852	40.75	59.71	18.96	117.45	57.74	PK	Vertic	PASS
6	5868	39.37	58.46	19.09	107.38	48.92	PK	Vertic	PASS
7	5897	38.13	57.44	19.31	89.34	31.90	PK	Vertic	PASS
8	5930	38.22	57.79	19.57	68.30	10.51	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

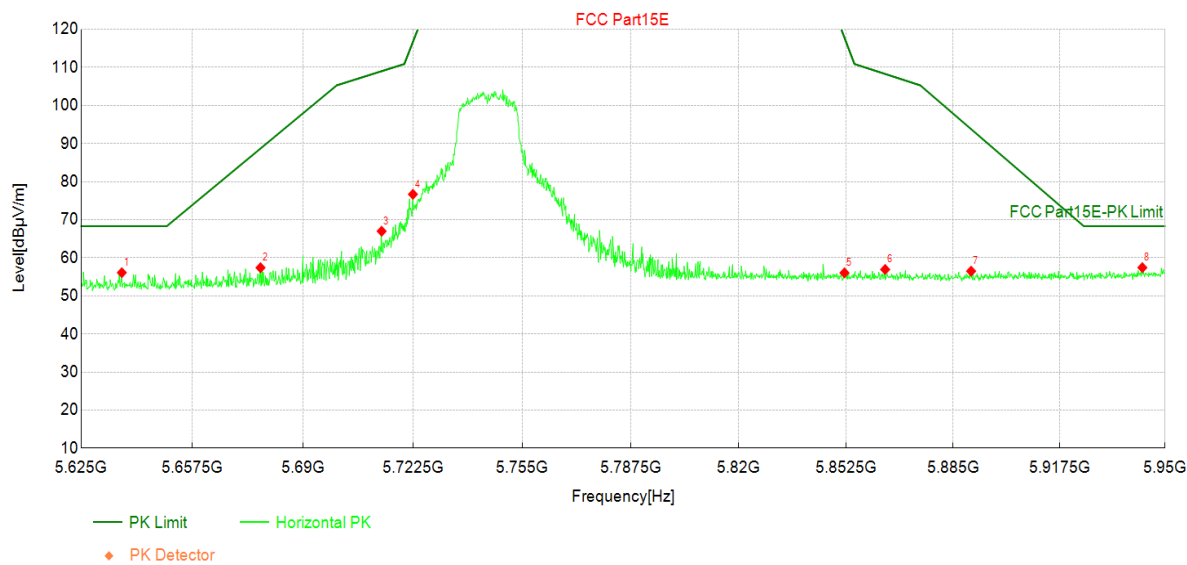

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	38.03	56.10	18.07	68.30	12.20	PK	Horizo	PASS
2	5678	38.91	57.40	18.49	88.70	31.30	PK	Horizo	PASS
3	5713	48.29	66.98	18.69	109.02	42.04	PK	Horizo	PASS
4	5723	58.01	76.68	18.67	116.71	40.03	PK	Horizo	PASS
5	5852	37.09	56.05	18.96	117.82	61.77	PK	Horizo	PASS
6	5864	37.87	56.93	19.06	108.29	51.36	PK	Horizo	PASS
7	5890	37.22	56.49	19.27	93.80	37.31	PK	Horizo	PASS
8	5943	37.75	57.42	19.67	68.30	10.88	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

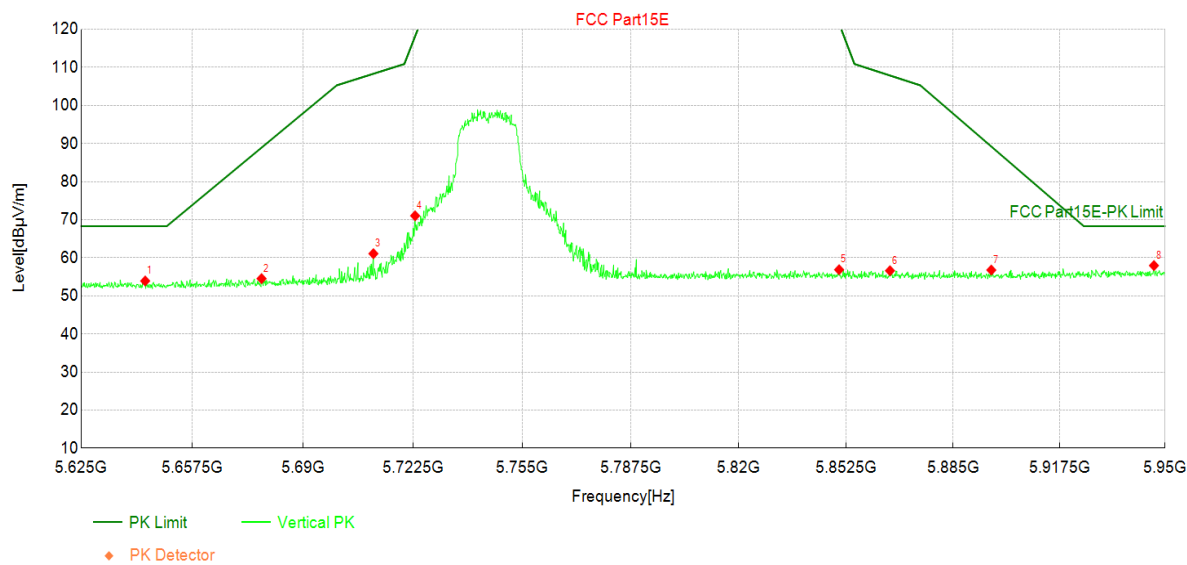

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	35.77	53.92	18.15	68.30	14.38	PK	Vertic	PASS
2	5678	36.04	54.53	18.49	88.94	34.41	PK	Vertic	PASS
3	5711	42.39	61.08	18.69	108.34	47.26	PK	Vertic	PASS
4	5723	52.36	71.03	18.67	118.20	47.17	PK	Vertic	PASS
5	5850	37.92	56.87	18.95	121.53	64.66	PK	Vertic	PASS
6	5866	37.54	56.60	19.06	107.88	51.28	PK	Vertic	PASS
7	5897	37.48	56.79	19.31	89.22	32.43	PK	Vertic	PASS
8	5947	38.26	57.96	19.70	68.30	10.34	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

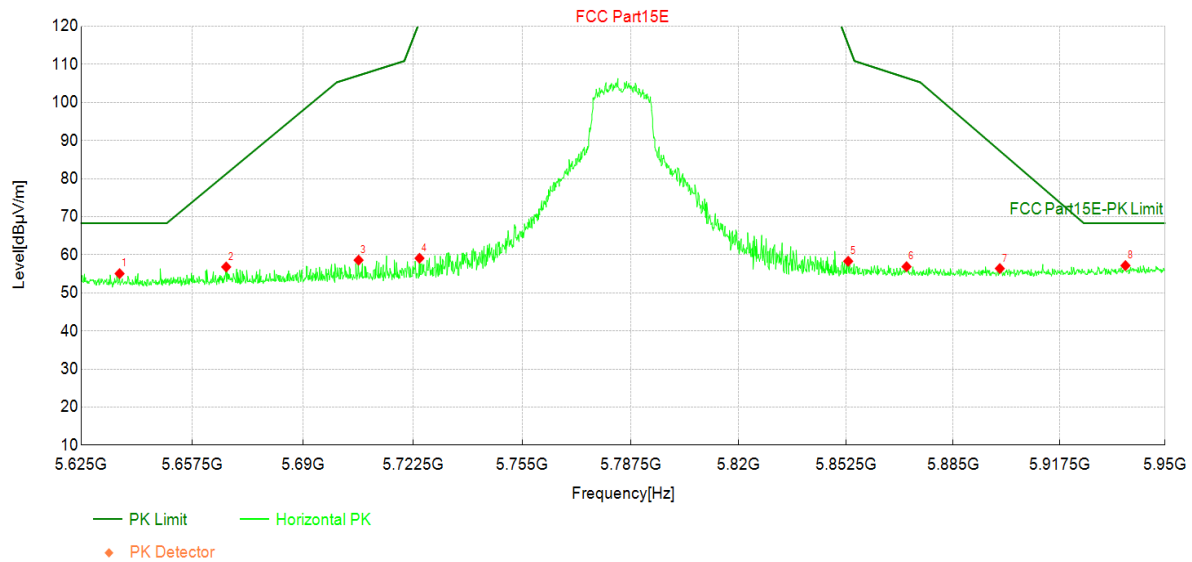

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	36.99	55.06	18.07	68.30	13.24	PK	Horizo	PASS
2	5667	38.42	56.81	18.39	81.24	24.43	PK	Horizo	PASS
3	5706	39.91	58.60	18.69	107.11	48.51	PK	Horizo	PASS
4	5724	40.42	59.09	18.67	121.16	62.07	PK	Horizo	PASS
5	5853	39.35	58.31	18.96	115.23	56.92	PK	Horizo	PASS
6	5871	37.78	56.88	19.10	106.47	49.59	PK	Horizo	PASS
7	5899	37.06	56.40	19.34	87.30	30.90	PK	Horizo	PASS
8	5938	37.53	57.16	19.63	68.30	11.14	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

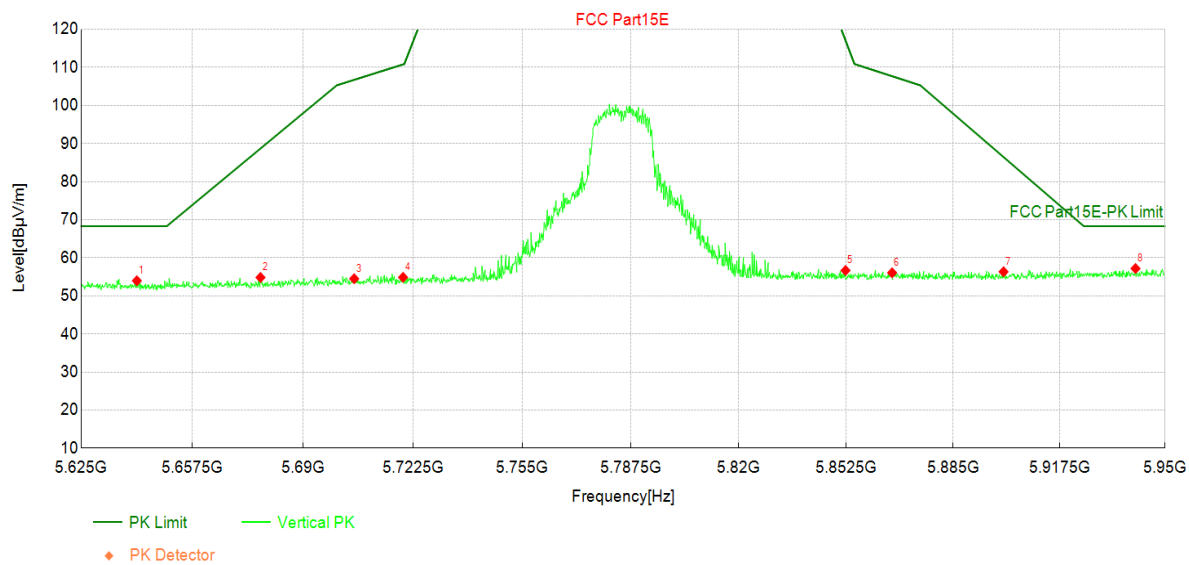

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	35.85	53.97	18.12	68.30	14.33	PK	Vertic	PASS
2	5678	36.34	54.83	18.49	88.70	33.87	PK	Vertic	PASS
3	5705	35.80	54.50	18.70	106.74	52.24	PK	Vertic	PASS
4	5720	36.18	54.86	18.68	110.79	55.93	PK	Vertic	PASS
5	5852	37.71	56.67	18.96	117.08	60.41	PK	Vertic	PASS
6	5866	36.98	56.05	19.07	107.70	51.65	PK	Vertic	PASS
7	5900	36.99	56.33	19.34	86.46	30.13	PK	Vertic	PASS
8	5941	37.53	57.18	19.65	68.30	11.12	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

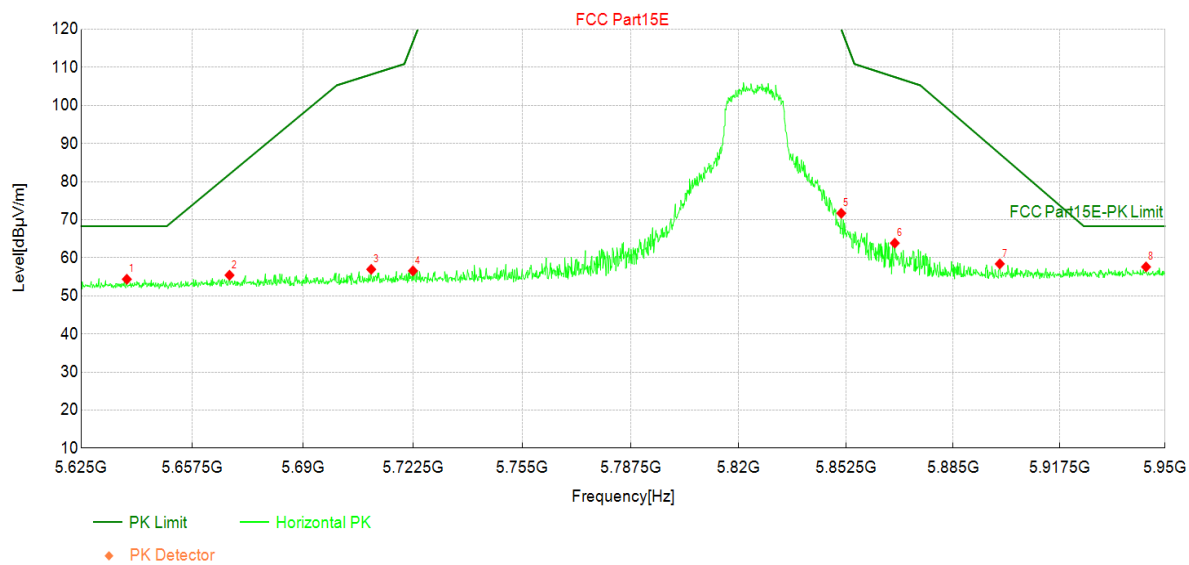

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	36.26	54.36	18.10	68.30	13.94	PK	Horizo	PASS
2	5668	37.03	55.43	18.40	81.96	26.53	PK	Horizo	PASS
3	5710	38.28	56.97	18.69	108.16	51.19	PK	Horizo	PASS
4	5723	37.89	56.56	18.67	116.71	60.15	PK	Horizo	PASS
5	5851	52.75	71.70	18.95	120.05	48.35	PK	Horizo	PASS
6	5867	44.78	63.85	19.07	107.47	43.62	PK	Horizo	PASS
7	5899	39.06	58.40	19.34	87.30	28.90	PK	Horizo	PASS
8	5944	37.94	57.61	19.67	68.30	10.69	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

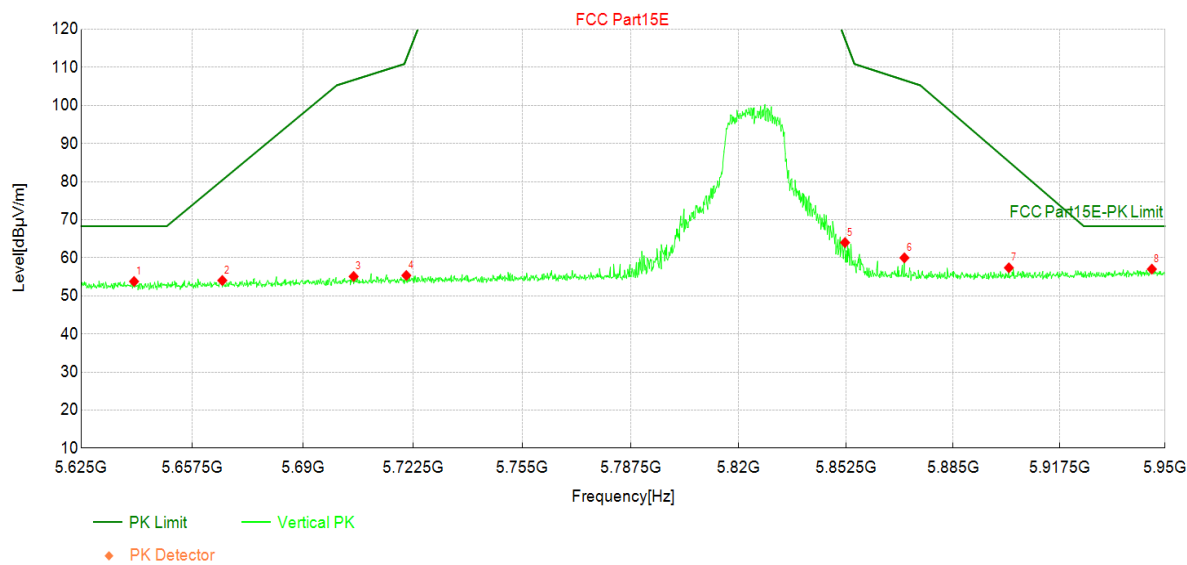

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	35.67	53.78	18.11	68.30	14.52	PK	Vertic	PASS
2	5666	35.67	54.04	18.37	80.39	26.35	PK	Vertic	PASS
3	5705	36.39	55.09	18.70	106.70	51.61	PK	Vertic	PASS
4	5721	36.68	55.36	18.68	112.26	56.90	PK	Vertic	PASS
5	5852	45.03	63.99	18.96	117.45	53.46	PK	Vertic	PASS
6	5870	40.89	59.99	19.10	106.65	46.66	PK	Vertic	PASS
7	5902	38.03	57.38	19.35	85.25	27.87	PK	Vertic	PASS
8	5946	37.33	57.02	19.69	68.30	11.28	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

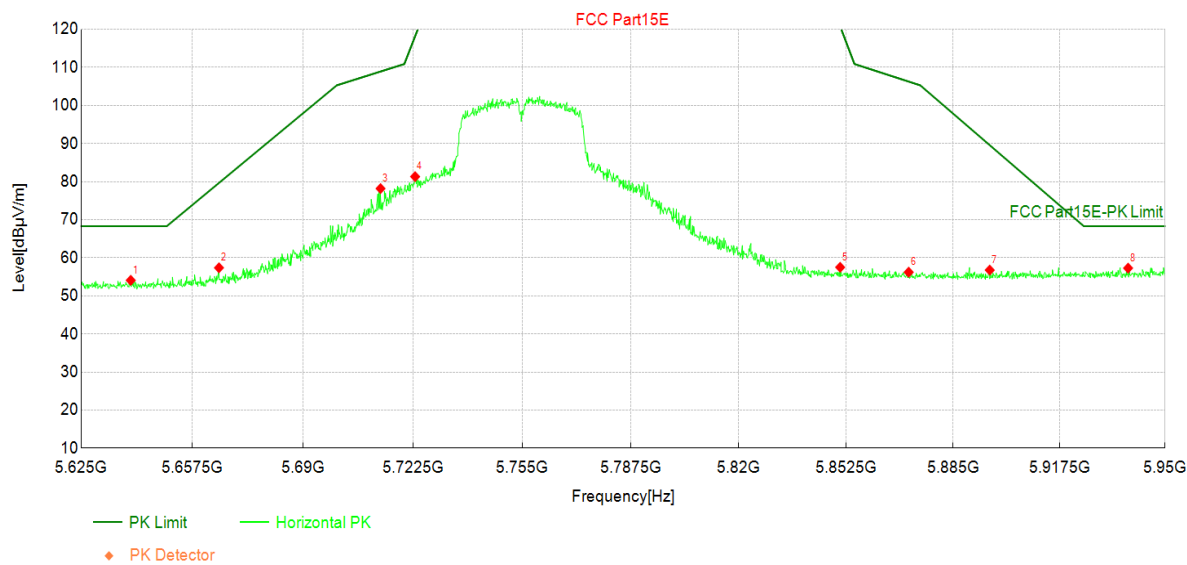

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	35.98	54.08	18.10	68.30	14.22	PK	Horizo	PASS
2	5665	39.02	57.38	18.36	79.67	22.29	PK	Horizo	PASS
3	5713	59.49	78.18	18.69	108.93	30.75	PK	Horizo	PASS
4	5723	62.65	81.32	18.67	118.20	36.88	PK	Horizo	PASS
5	5851	38.55	57.50	18.95	120.79	63.29	PK	Horizo	PASS
6	5871	37.11	56.22	19.11	106.29	50.07	PK	Horizo	PASS
7	5896	37.46	56.77	19.31	89.58	32.81	PK	Horizo	PASS
8	5939	37.66	57.29	19.63	68.30	11.01	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

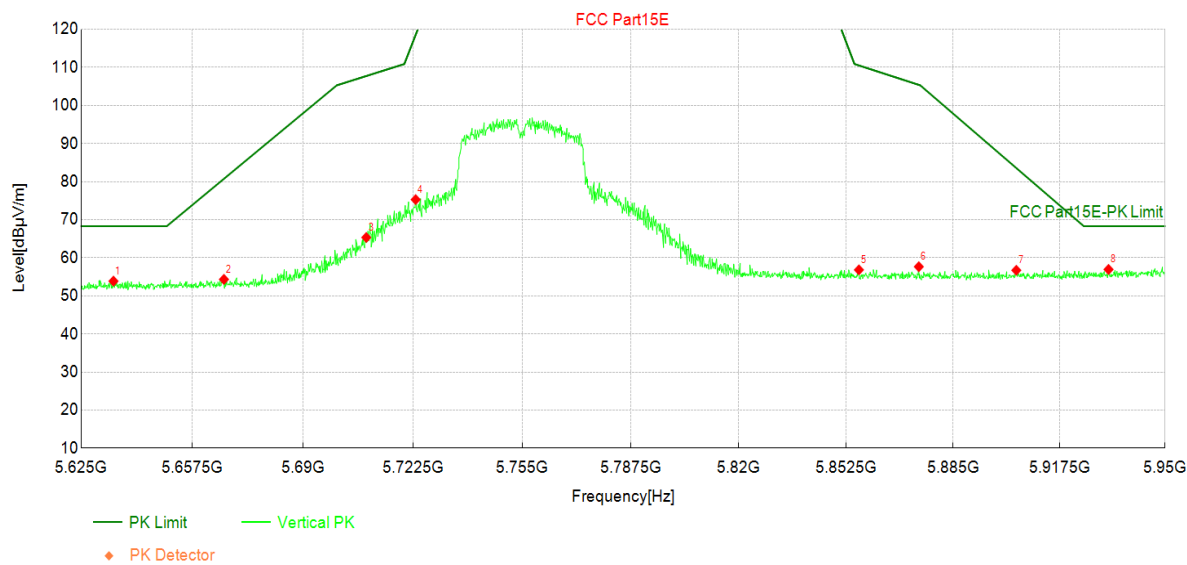

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5634	35.81	53.87	18.06	68.30	14.43	PK	Vertic	PASS
2	5667	35.96	54.33	18.37	80.76	26.43	PK	Vertic	PASS
3	5709	46.64	65.34	18.70	107.75	42.41	PK	Vertic	PASS
4	5723	56.62	75.29	18.67	118.57	43.28	PK	Vertic	PASS
5	5856	37.84	56.83	18.99	110.52	53.69	PK	Vertic	PASS
6	5875	38.52	57.66	19.14	105.42	47.76	PK	Vertic	PASS
7	5904	37.35	56.72	19.37	83.57	26.85	PK	Vertic	PASS
8	5933	37.36	56.94	19.58	68.30	11.36	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

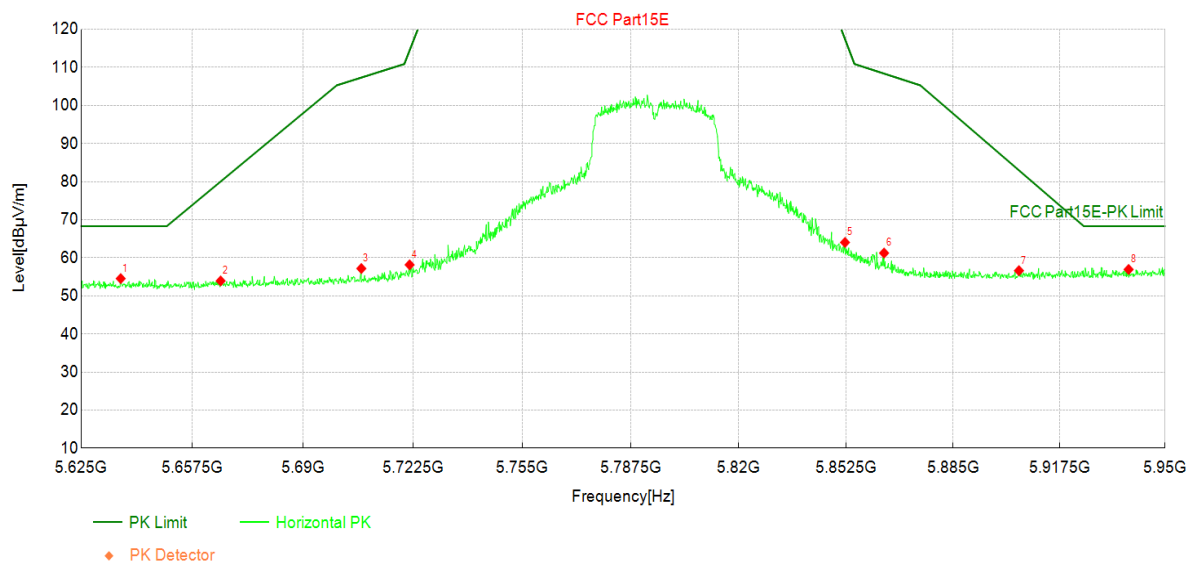

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.48	54.55	18.07	68.30	13.75	PK	Horizo	PASS
2	5666	35.55	53.92	18.37	80.03	26.11	PK	Horizo	PASS
3	5707	38.48	57.18	18.70	107.34	50.16	PK	Horizo	PASS
4	5722	39.48	58.15	18.67	114.49	56.34	PK	Horizo	PASS
5	5852	45.08	64.04	18.96	117.45	53.41	PK	Horizo	PASS
6	5864	42.20	61.25	19.05	108.38	47.13	PK	Horizo	PASS
7	5905	37.24	56.62	19.38	82.97	26.35	PK	Horizo	PASS
8	5939	37.29	56.93	19.64	68.30	11.37	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

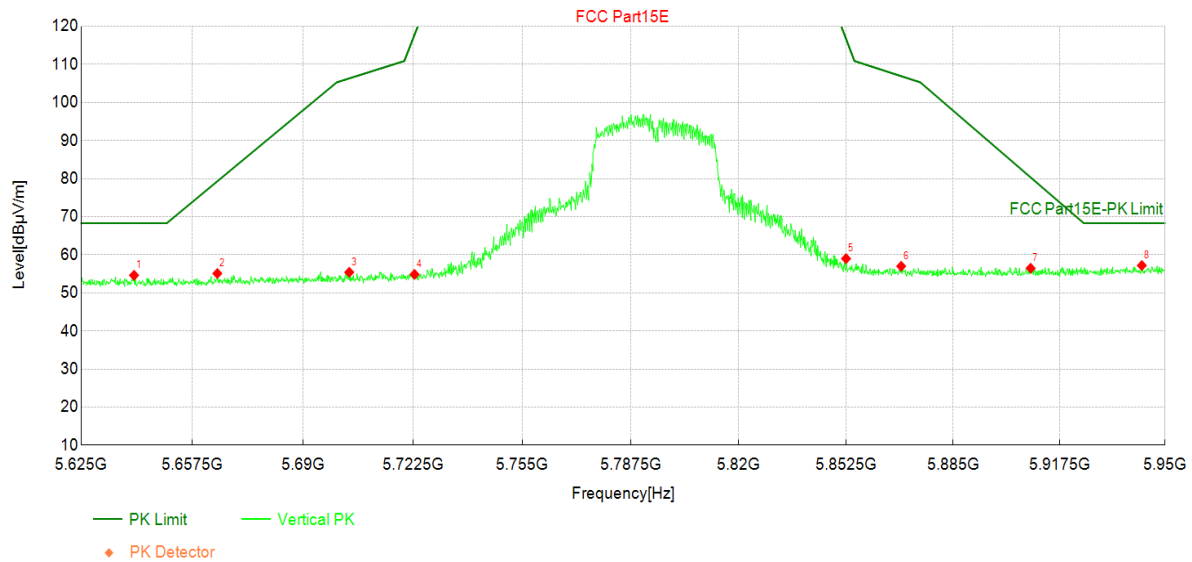

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.51	54.62	18.11	68.30	13.68	PK	Vertic	PASS
2	5665	36.73	55.09	18.36	79.31	24.22	PK	Vertic	PASS
3	5704	36.70	55.41	18.71	106.33	50.92	PK	Vertic	PASS
4	5723	36.18	54.85	18.67	117.82	62.97	PK	Vertic	PASS
5	5852	40.03	58.99	18.96	116.71	57.72	PK	Vertic	PASS
6	5869	37.90	56.99	19.09	106.92	49.93	PK	Vertic	PASS
7	5909	37.06	56.47	19.41	80.32	23.85	PK	Vertic	PASS
8	5943	37.52	57.19	19.67	68.30	11.11	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

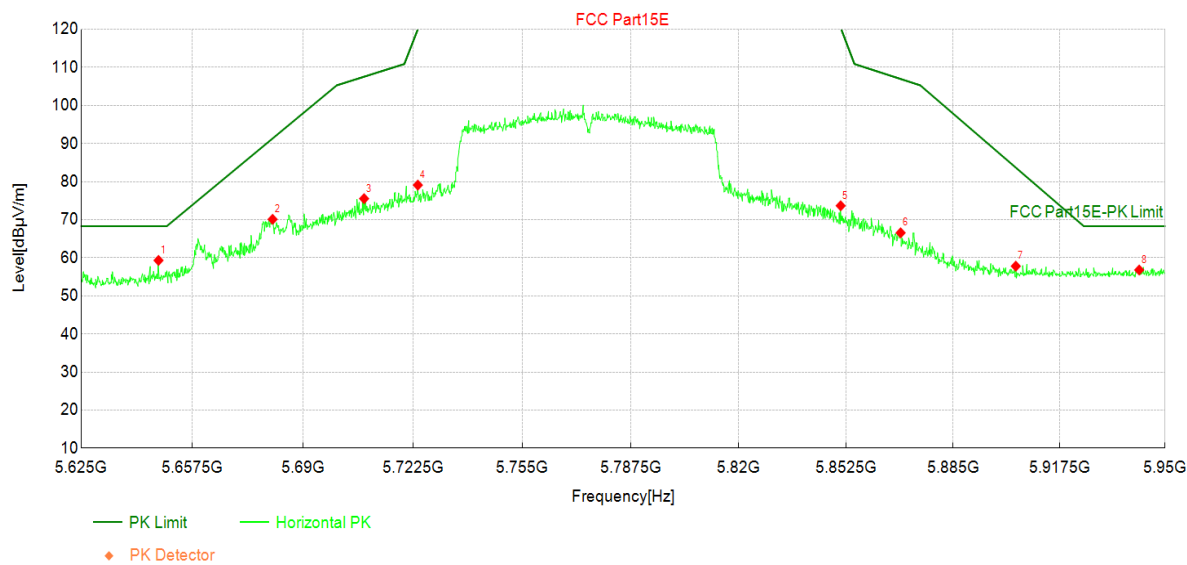

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648	41.12	59.31	18.19	68.30	8.99	PK	Horizo	PASS
2	5681	51.59	70.11	18.52	91.35	21.24	PK	Horizo	PASS
3	5708	56.84	75.54	18.70	107.56	32.02	PK	Horizo	PASS
4	5724	60.43	79.10	18.67	120.05	40.95	PK	Horizo	PASS
5	5851	54.72	73.67	18.95	120.42	46.75	PK	Horizo	PASS
6	5869	47.47	66.56	19.09	106.97	40.41	PK	Horizo	PASS
7	5904	38.43	57.80	19.37	83.69	25.89	PK	Horizo	PASS
8	5942	37.14	56.80	19.66	68.30	11.50	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

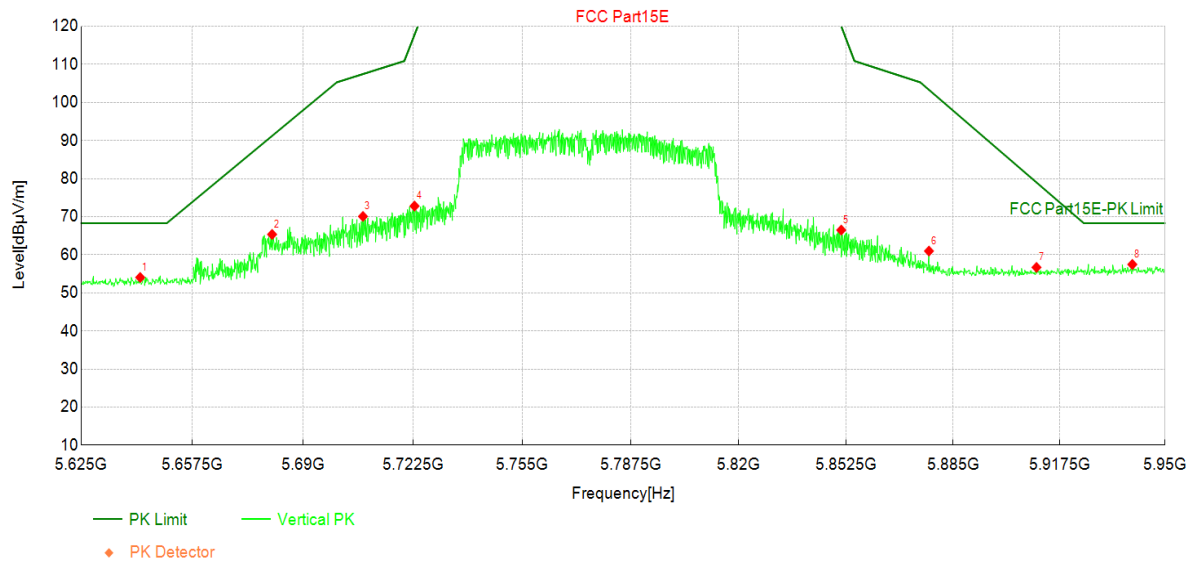

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	35.91	54.05	18.14	68.30	14.25	PK	Vertic	PASS
2	5681	46.83	65.35	18.52	91.23	25.88	PK	Vertic	PASS
3	5708	51.38	70.08	18.70	107.47	37.39	PK	Vertic	PASS
4	5723	54.13	72.80	18.67	117.82	45.02	PK	Vertic	PASS
5	5851	47.55	66.50	18.95	120.05	53.55	PK	Vertic	PASS
6	5878	41.82	60.98	19.16	103.33	42.35	PK	Vertic	PASS
7	5910	37.27	56.69	19.42	79.00	22.31	PK	Vertic	PASS
8	5940	37.83	57.47	19.64	68.30	10.83	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

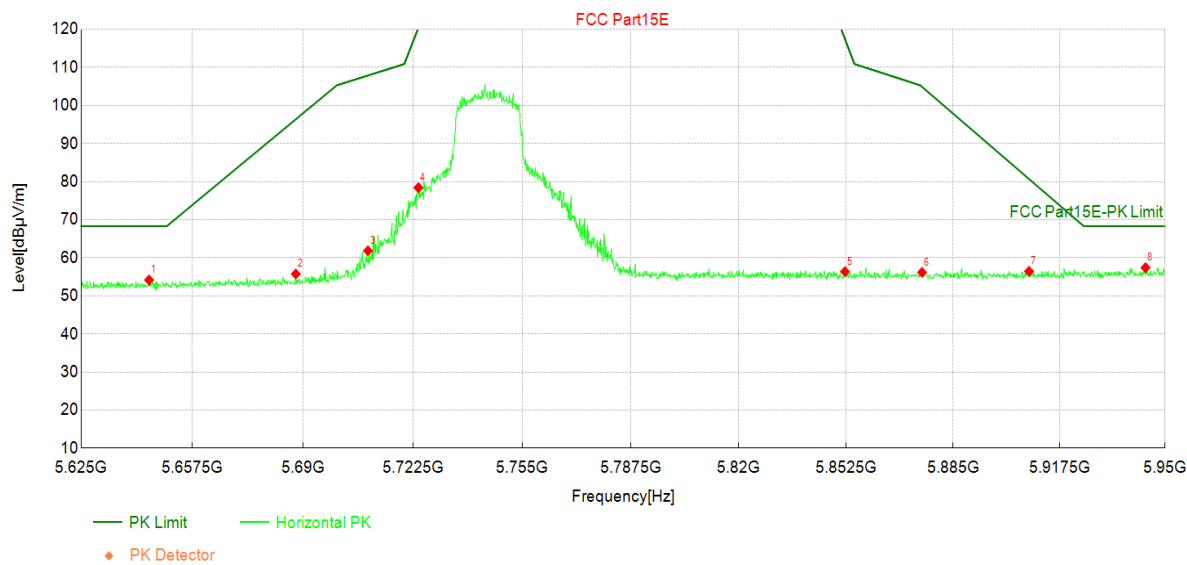

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5645	36.01	54.17	18.16	68.30	14.13	PK	Horizo	PASS
2	5688	37.17	55.76	18.59	96.39	40.63	PK	Horizo	PASS
3	5709	43.16	61.85	18.69	107.88	46.03	PK	Horizo	PASS
4	5724	59.75	78.42	18.67	120.42	42.00	PK	Horizo	PASS
5	5852	37.41	56.37	18.96	117.45	61.08	PK	Horizo	PASS
6	5876	37.03	56.17	19.14	104.90	48.73	PK	Horizo	PASS
7	5908	37.05	56.45	19.40	80.68	24.23	PK	Horizo	PASS
8	5944	37.73	57.40	19.67	68.30	10.90	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

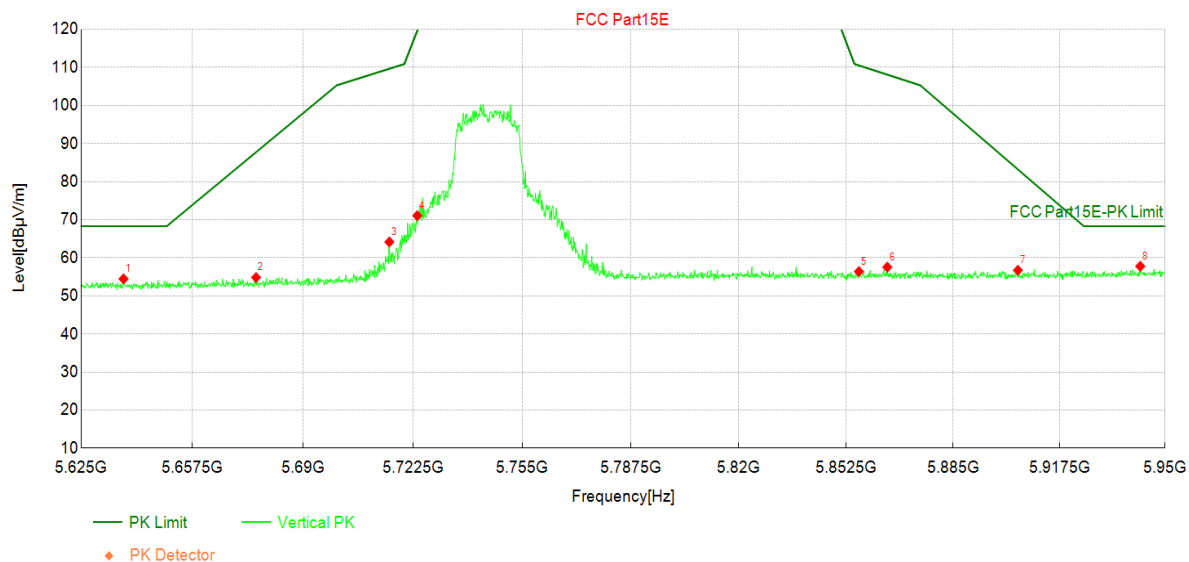

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.37	54.46	18.09	68.30	13.84	PK	Vertic	PASS
2	5676	36.35	54.83	18.48	87.74	32.91	PK	Vertic	PASS
3	5716	45.47	64.16	18.69	109.66	45.50	PK	Vertic	PASS
4	5724	52.41	71.07	18.66	119.68	48.61	PK	Vertic	PASS
5	5856	37.41	56.40	18.99	110.52	54.12	PK	Vertic	PASS
6	5865	38.48	57.54	19.06	108.11	50.57	PK	Vertic	PASS
7	5905	37.36	56.74	19.38	83.21	26.47	PK	Vertic	PASS
8	5942	38.11	57.77	19.66	68.30	10.53	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

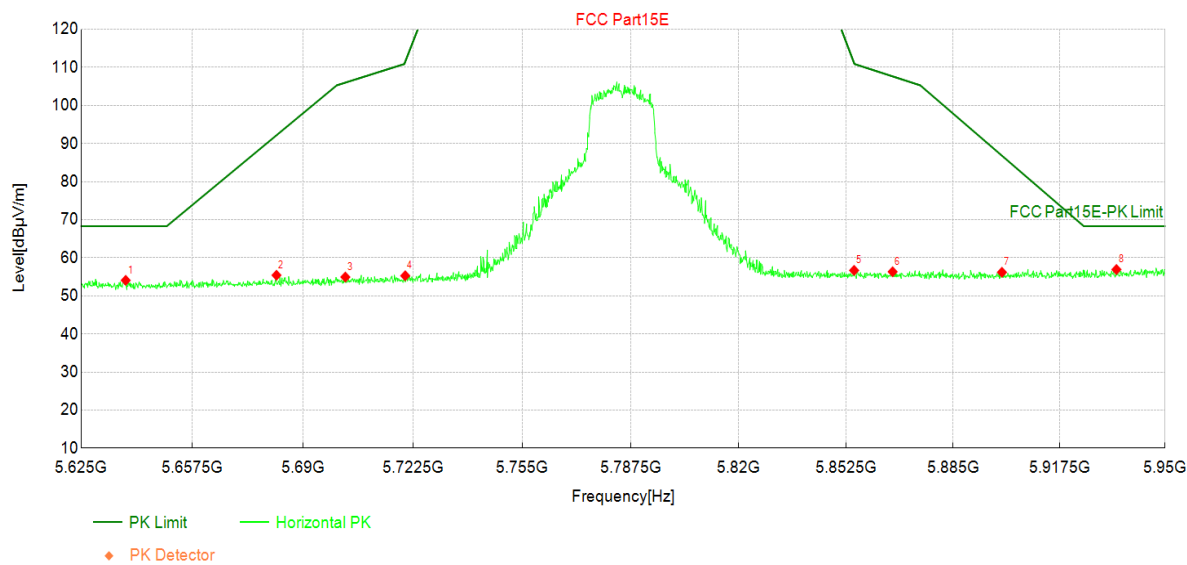

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	35.99	54.08	18.09	68.30	14.22	PK	Horizo	PASS
2	5682	36.89	55.42	18.53	92.19	36.77	PK	Horizo	PASS
3	5703	36.23	54.94	18.71	106.02	51.08	PK	Horizo	PASS
4	5720	36.61	55.29	18.68	111.52	56.23	PK	Horizo	PASS
5	5855	37.71	56.69	18.98	111.15	54.46	PK	Horizo	PASS
6	5867	37.26	56.33	19.07	107.65	51.32	PK	Horizo	PASS
7	5900	36.85	56.19	19.34	86.82	30.63	PK	Horizo	PASS
8	5935	37.31	56.92	19.61	68.30	11.38	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

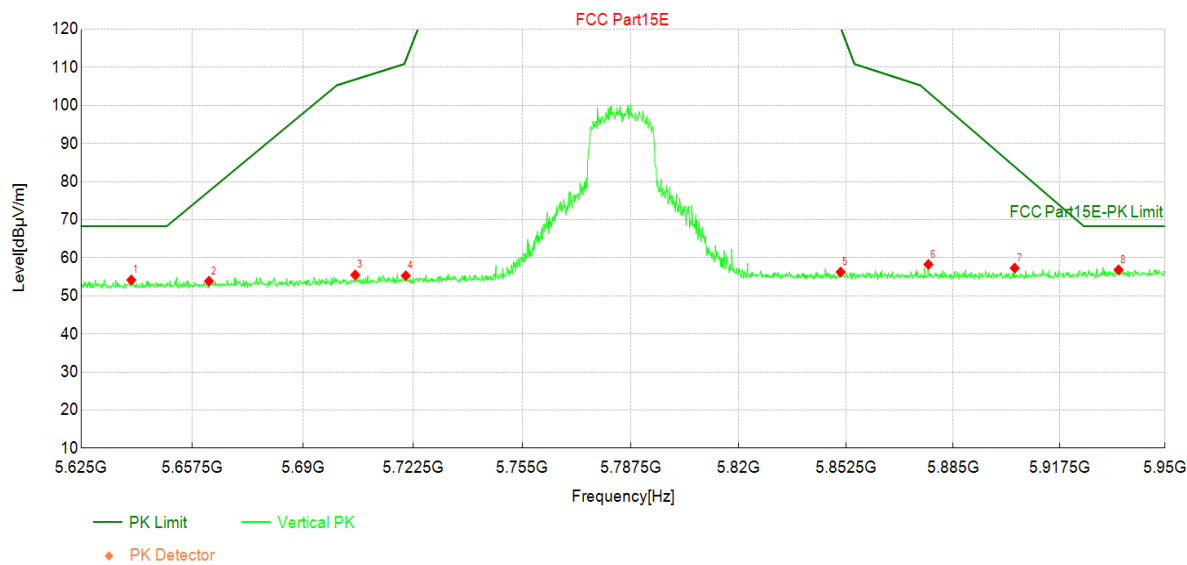

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.07	54.18	18.11	68.30	14.12	PK	Vertic	PASS
2	5662	35.53	53.86	18.33	77.50	23.64	PK	Vertic	PASS
3	5705	36.79	55.49	18.70	106.84	51.35	PK	Vertic	PASS
4	5720	36.62	55.30	18.68	111.89	56.59	PK	Vertic	PASS
5	5851	37.31	56.26	18.95	120.42	64.16	PK	Vertic	PASS
6	5877	39.09	58.25	19.16	103.45	45.20	PK	Vertic	PASS
7	5904	37.92	57.29	19.37	83.93	26.64	PK	Vertic	PASS
8	5936	37.23	56.84	19.61	68.30	11.46	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

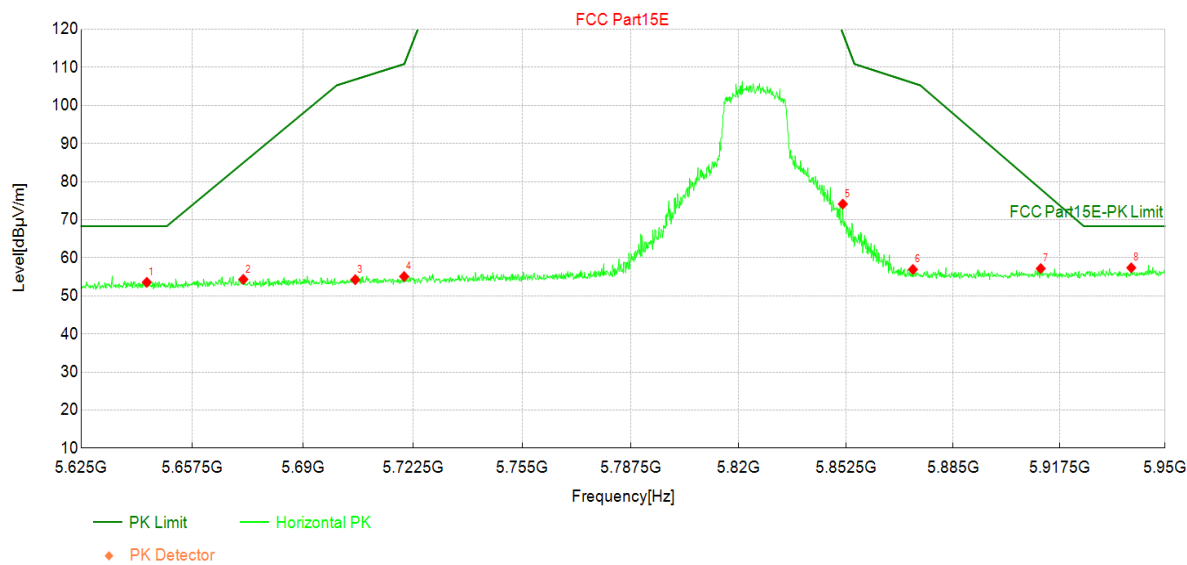

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	35.42	53.57	18.15	68.30	14.73	PK	Horizo	PASS
2	5672	35.89	54.33	18.44	84.97	30.64	PK	Horizo	PASS
3	5705	35.56	54.26	18.70	106.84	52.58	PK	Horizo	PASS
4	5720	36.40	55.08	18.68	110.89	55.81	PK	Horizo	PASS
5	5851	55.16	74.11	18.95	118.93	44.82	PK	Horizo	PASS
6	5873	37.81	56.93	19.12	105.92	48.99	PK	Horizo	PASS
7	5912	37.74	57.17	19.43	78.04	20.87	PK	Horizo	PASS
8	5940	37.74	57.38	19.64	68.30	10.92	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

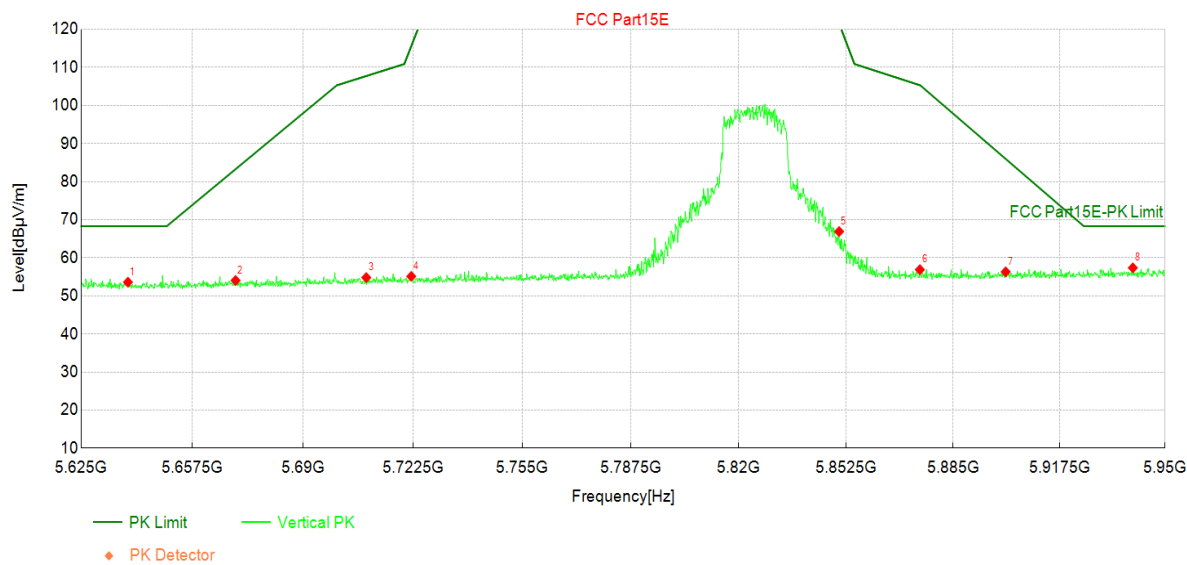

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	35.49	53.59	18.10	68.30	14.71	PK	Vertic	PASS
2	5670	35.64	54.05	18.41	83.29	29.24	PK	Vertic	PASS
3	5709	36.10	54.80	18.70	107.75	52.95	PK	Vertic	PASS
4	5722	36.45	55.12	18.67	115.60	60.48	PK	Vertic	PASS
5	5850	47.95	66.90	18.95	121.53	54.63	PK	Vertic	PASS
6	5875	37.74	56.88	19.14	105.33	48.45	PK	Vertic	PASS
7	5901	36.96	56.31	19.35	85.97	29.66	PK	Vertic	PASS
8	5940	37.73	57.37	19.64	68.30	10.93	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

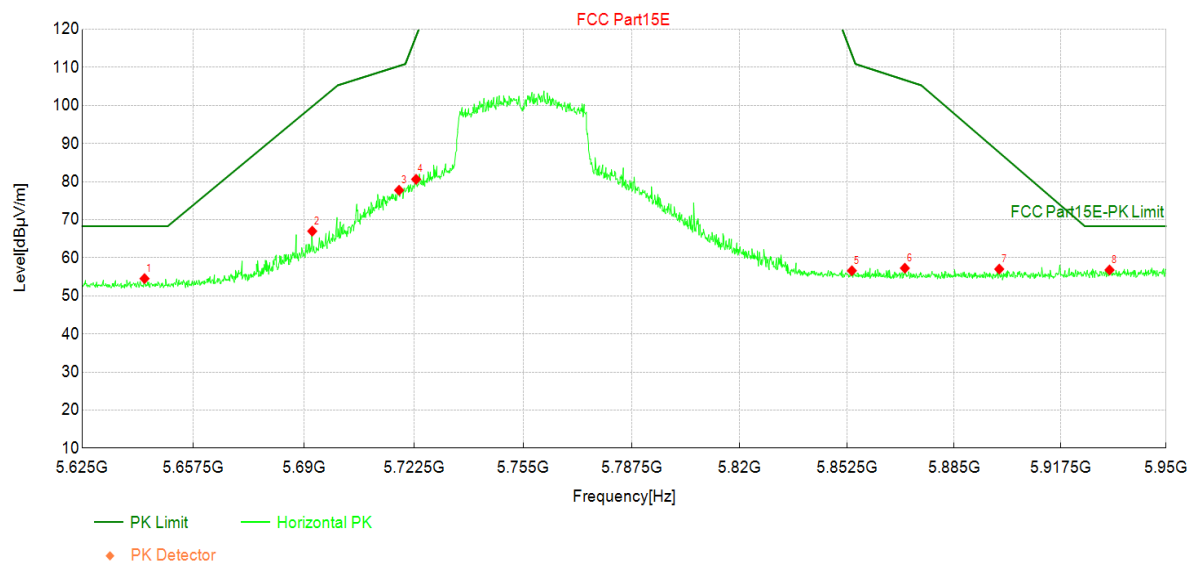

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.39	54.53	18.14	68.30	13.77	PK	Horizo	PASS
2	5692	48.36	66.99	18.63	99.75	32.76	PK	Horizo	PASS
3	5718	59.06	77.74	18.68	110.39	32.65	PK	Horizo	PASS
4	5723	61.95	80.62	18.67	118.20	37.58	PK	Horizo	PASS
5	5854	37.63	56.60	18.97	113.37	56.77	PK	Horizo	PASS
6	5870	38.17	57.27	19.10	106.70	49.43	PK	Horizo	PASS
7	5899	37.70	57.03	19.33	87.66	30.63	PK	Horizo	PASS
8	5933	37.21	56.79	19.58	68.30	11.51	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

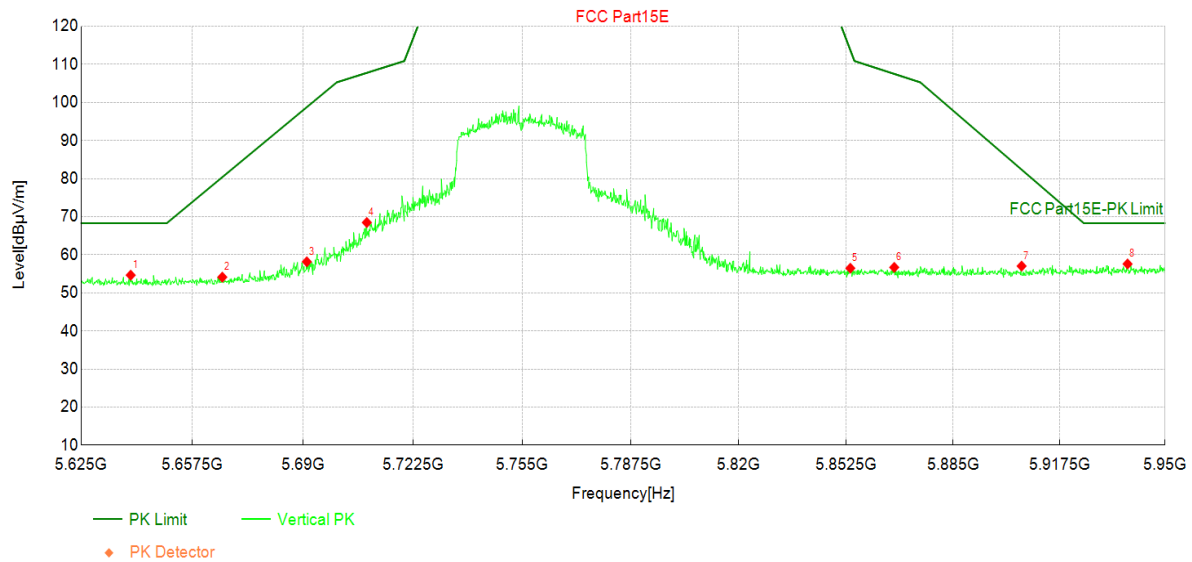

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.55	54.65	18.10	68.30	13.65	PK	Vertic	PASS
2	5666	35.75	54.12	18.37	80.39	26.27	PK	Vertic	PASS
3	5691	39.55	58.17	18.62	98.79	40.62	PK	Vertic	PASS
4	5709	49.78	68.47	18.69	107.79	39.32	PK	Vertic	PASS
5	5854	37.51	56.48	18.97	113.74	57.26	PK	Vertic	PASS
6	5867	37.63	56.70	19.07	107.51	50.81	PK	Vertic	PASS
7	5906	37.66	57.04	19.38	82.37	25.33	PK	Vertic	PASS
8	5938	37.96	57.59	19.63	68.30	10.71	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

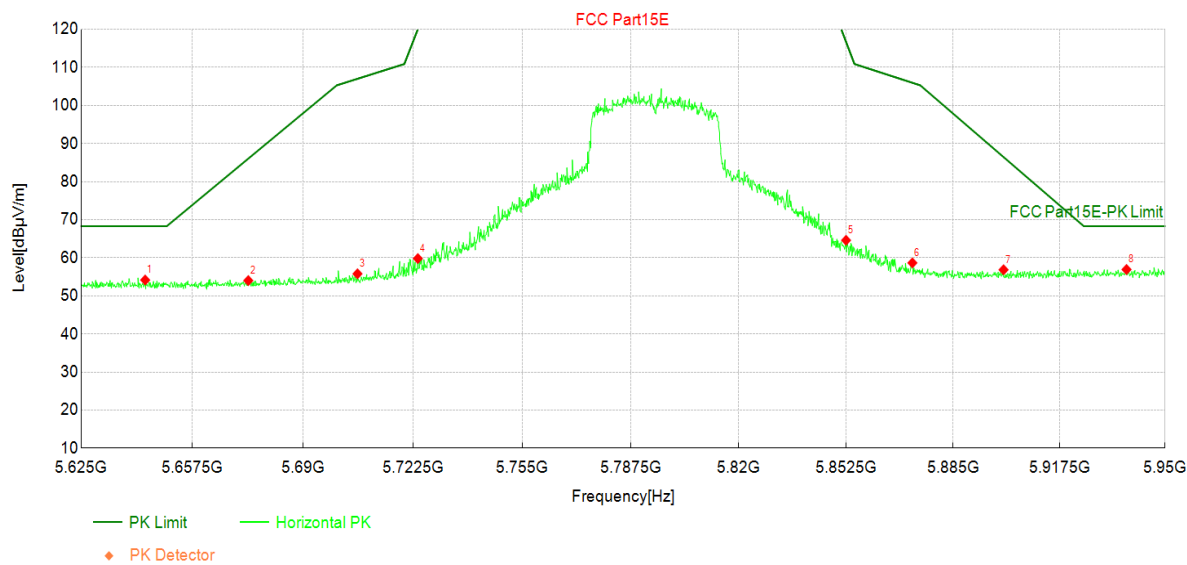

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	36.01	54.16	18.15	68.30	14.14	PK	Horizo	PASS
2	5674	35.56	54.01	18.45	86.05	32.04	PK	Horizo	PASS
3	5706	37.09	55.79	18.70	107.02	51.23	PK	Horizo	PASS
4	5724	41.14	59.81	18.67	120.05	60.24	PK	Horizo	PASS
5	5852	45.64	64.60	18.96	116.71	52.11	PK	Horizo	PASS
6	5873	39.54	58.66	19.12	105.97	47.31	PK	Horizo	PASS
7	5900	37.51	56.85	19.34	86.46	29.61	PK	Horizo	PASS
8	5938	37.29	56.92	19.63	68.30	11.38	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 8:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

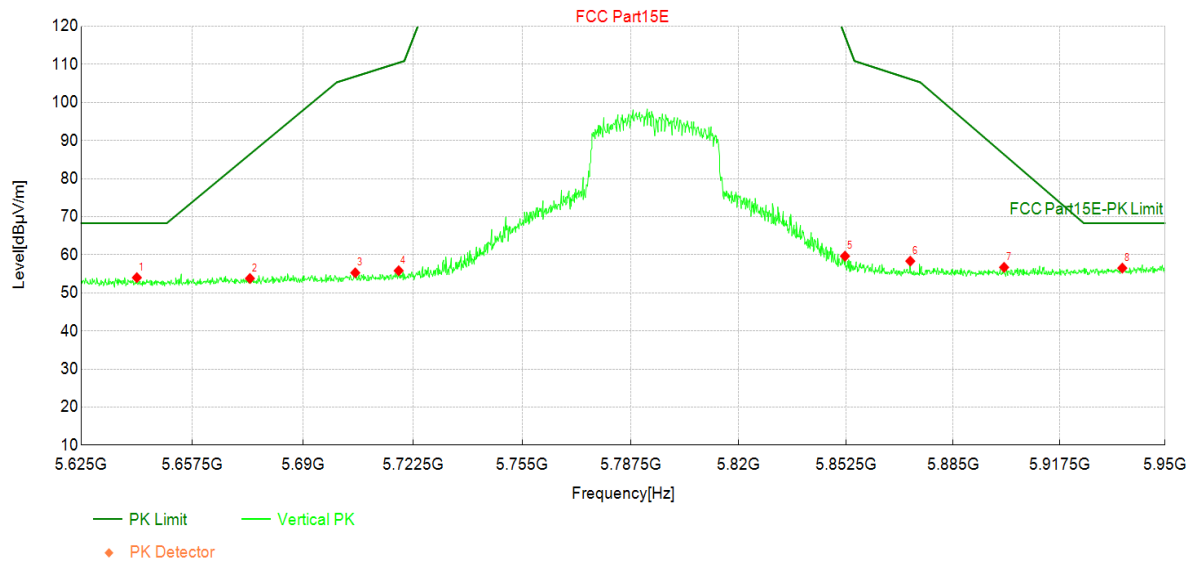

Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	35.88	54.00	18.12	68.30	14.30	PK	Vertic	PASS
2	5674	35.33	53.78	18.45	86.42	32.64	PK	Vertic	PASS
3	5705	36.58	55.28	18.70	106.84	51.56	PK	Vertic	PASS
4	5718	37.14	55.82	18.68	110.43	54.61	PK	Vertic	PASS
5	5852	40.68	59.64	18.96	117.45	57.81	PK	Vertic	PASS
6	5872	39.22	58.34	19.12	106.15	47.81	PK	Vertic	PASS
7	5901	37.37	56.71	19.34	86.34	29.63	PK	Vertic	PASS
8	5937	36.89	56.51	19.62	68.30	11.79	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

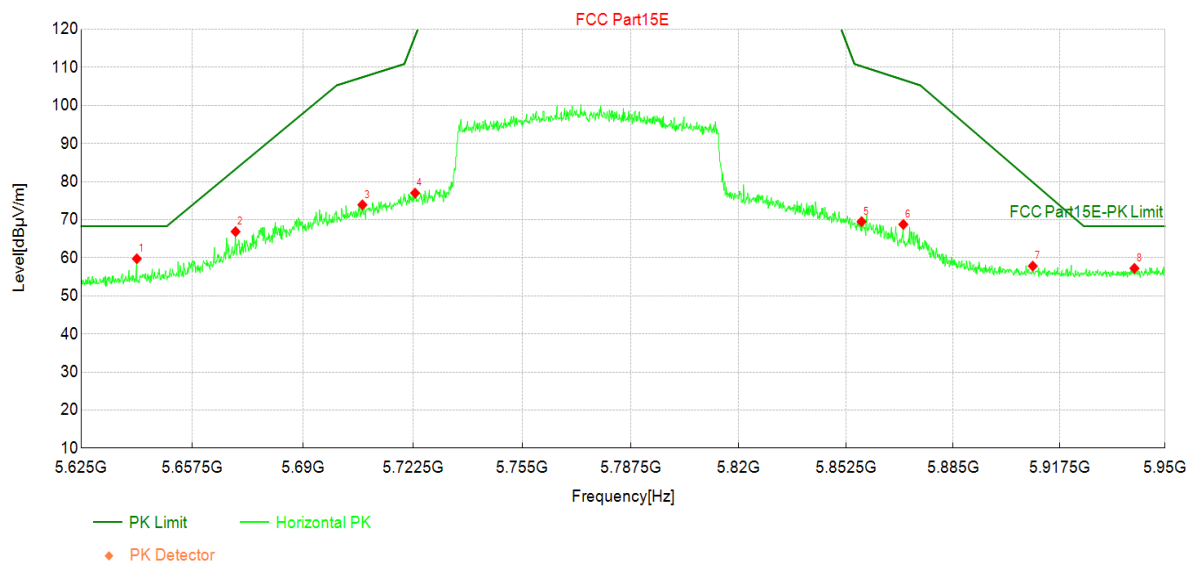

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	41.63	59.75	18.12	68.30	8.55	PK	Horizo	PASS
2	5670	48.46	66.87	18.41	83.29	16.42	PK	Horizo	PASS
3	5708	55.22	73.92	18.70	107.43	33.51	PK	Horizo	PASS
4	5723	58.33	77.00	18.67	118.20	41.20	PK	Horizo	PASS
5	5857	50.50	69.50	19.00	110.29	40.79	PK	Horizo	PASS
6	5870	49.67	68.77	19.10	106.74	37.97	PK	Horizo	PASS
7	5909	38.42	57.83	19.41	79.84	22.01	PK	Horizo	PASS
8	5941	37.57	57.22	19.65	68.30	11.08	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24C0528R	EUT:	Xiaomi TV Box S
Mode:	Mode 9:Transmit at 5775MHz by 802.11ax(80MHz)	Voltage:	120 Vac / 60 Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

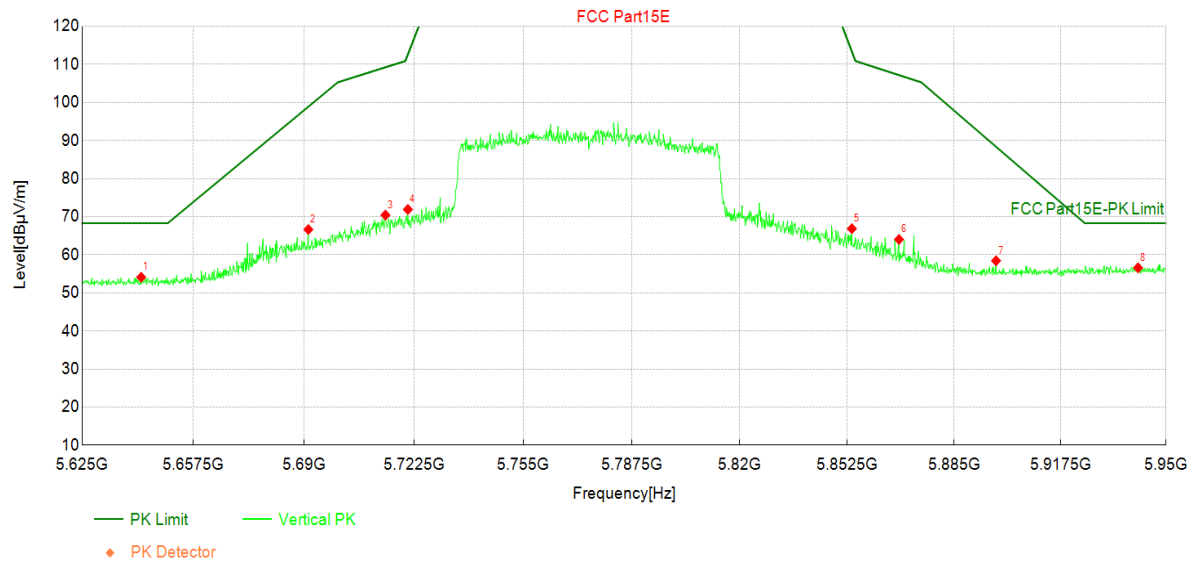

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	35.97	54.11	18.14	68.30	14.19	PK	Vertic	PASS
2	5691	48.01	66.63	18.62	98.91	32.28	PK	Vertic	PASS
3	5714	51.74	70.42	18.68	109.25	38.83	PK	Vertic	PASS
4	5721	53.22	71.90	18.68	112.63	40.73	PK	Vertic	PASS
5	5854	47.89	66.86	18.97	113.37	46.51	PK	Vertic	PASS
6	5868	44.95	64.04	19.09	107.20	43.16	PK	Vertic	PASS
7	5898	39.11	58.43	19.32	88.38	29.95	PK	Vertic	PASS
8	5941	36.92	56.58	19.66	68.30	11.72	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Note: We have evaluated SISO main antenna mode, SISO aux antenna mode and MIMO modem, shown in report is the worst data.


Appendix D: AC Power Line Conducted Emission

Profile: 24C0528R	Page No.: 7
Engineer: Yu Liu	
Site: TR1	Time: 2025/02/10 - 18:43
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: Xiaomi TV Box S	Power: 120 Vac / 60 Hz
Note: Mode 1:Transmit at 5180MHz by 802.11a	

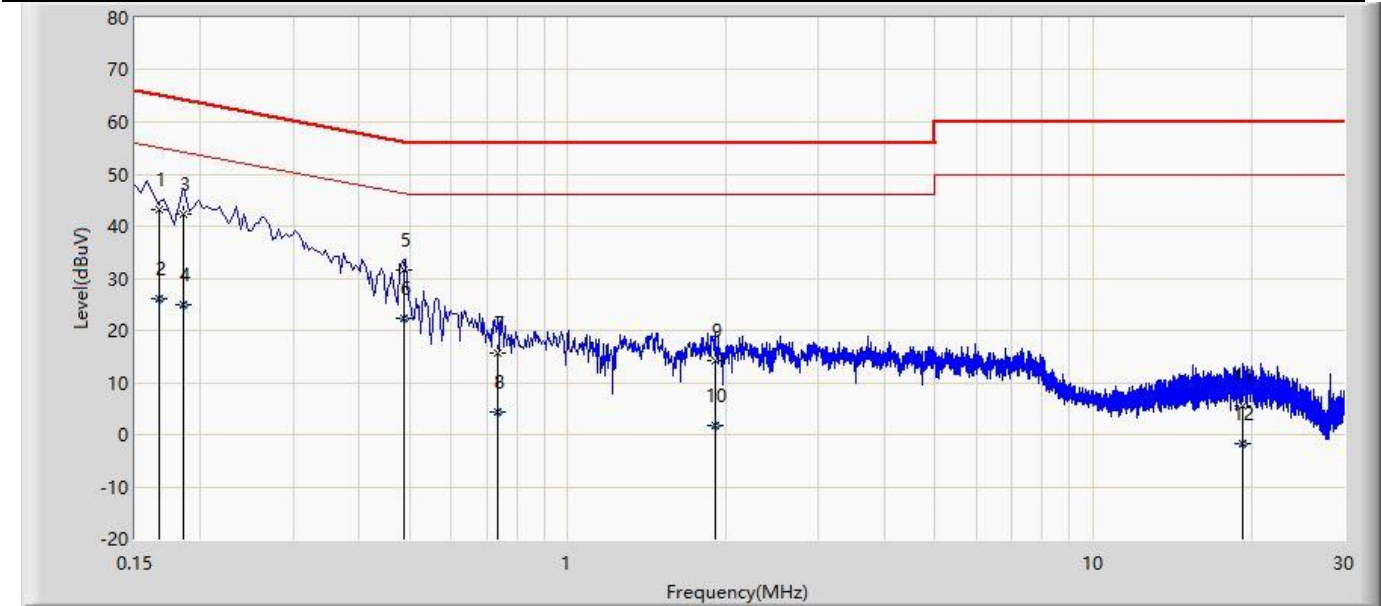

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.167	43.156	33.533	-21.948	65.105	9.624	QP
2		0.167	26.181	16.557	-28.924	55.105	9.624	AV
3	*	0.186	42.371	32.749	-21.842	64.213	9.622	QP
4		0.186	24.926	15.304	-29.287	54.213	9.622	AV
5		0.486	31.709	22.074	-24.527	56.236	9.636	QP
6		0.486	22.336	12.700	-23.900	46.236	9.636	AV
7		0.734	15.583	5.934	-40.417	56.000	9.649	QP
8		0.734	4.313	-5.336	-41.687	46.000	9.649	AV
9		1.902	14.070	4.377	-41.930	56.000	9.693	QP
10		1.902	1.798	-7.894	-44.202	46.000	9.693	AV
11		19.270	5.420	-4.760	-54.580	60.000	10.179	QP
12		19.270	-1.881	-12.060	-51.881	50.000	10.179	AV

Profile: 24C0528R	Page No.: 8
Engineer: Yu Liu	
Site: TR1	Time: 2025/02/10 - 18:47
Limit: FCC_Part 15.207	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: Xiaomi TV Box S	Power: 120 Vac / 60 Hz
Note: Mode 1:Transmit at 5180MHz by 802.11a	

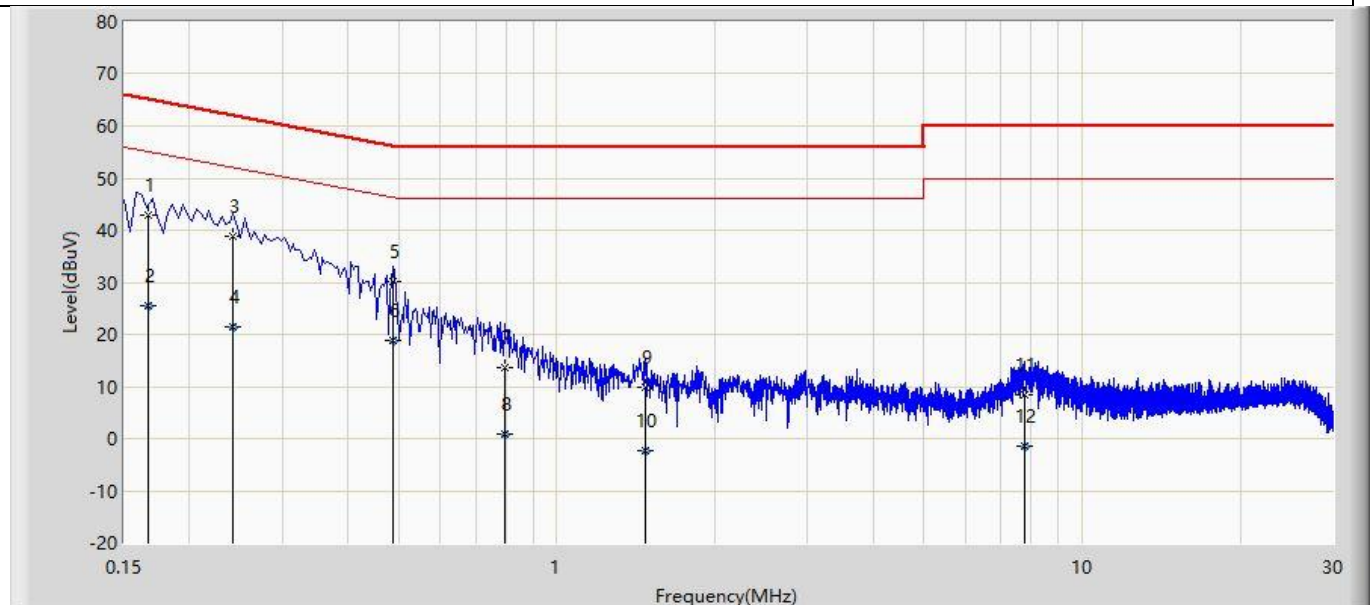

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.167	42.863	33.232	-22.242	65.105	9.631	QP
2		0.167	25.386	15.756	-29.718	55.105	9.631	AV
3		0.242	38.982	29.347	-23.046	62.027	9.634	QP
4		0.242	21.372	11.738	-30.655	52.027	9.634	AV
5		0.486	30.156	20.511	-26.079	56.236	9.646	QP
6		0.486	18.947	9.301	-27.289	46.236	9.646	AV
7		0.794	13.711	4.051	-42.289	56.000	9.660	QP
8		0.794	0.949	-8.711	-45.051	46.000	9.660	AV
9		1.470	9.907	0.225	-46.093	56.000	9.682	QP
10		1.470	-2.183	-11.865	-48.183	46.000	9.682	AV
11		7.790	8.294	-1.541	-51.706	60.000	9.835	QP
12		7.790	-1.458	-11.293	-51.458	50.000	9.835	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).
3. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.

The End