



Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6705 MHz		
Remark:			

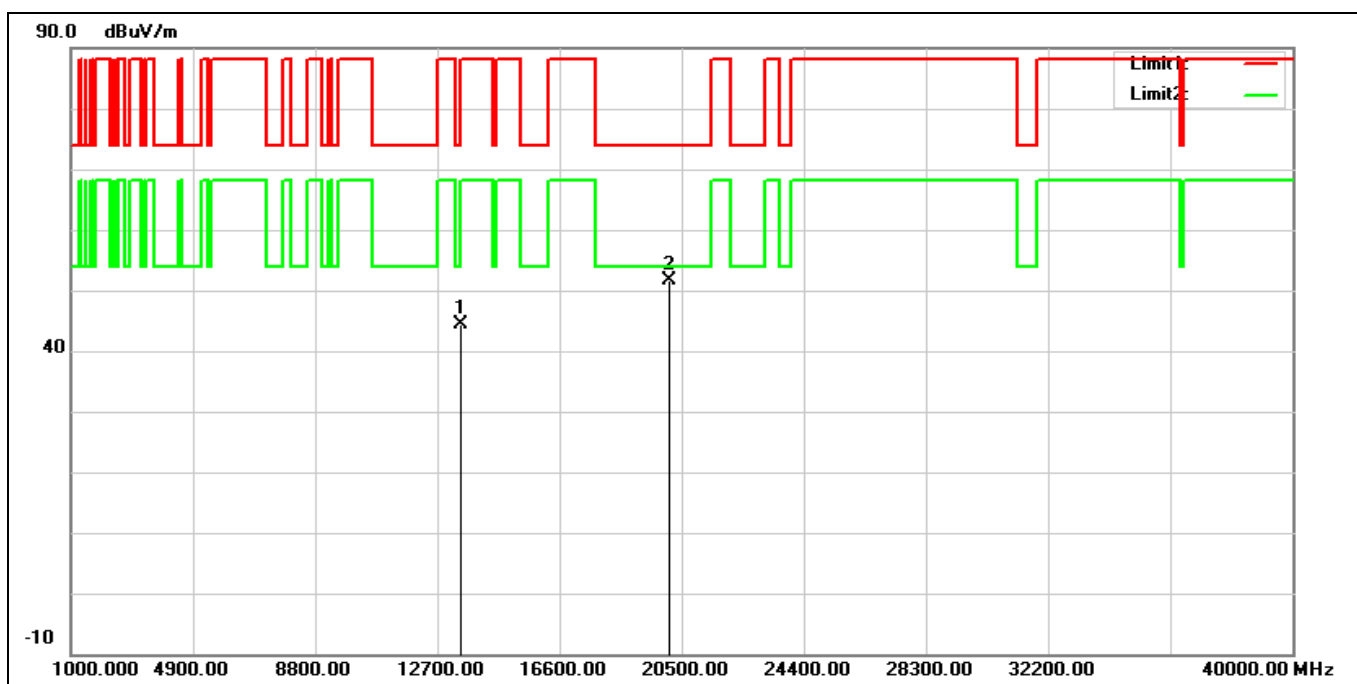


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	29.80	14.61	44.41	88.20	-43.79	peak
2*	20115.000	30.73	20.84	51.57	74.00	-22.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6785 MHz		
Remark:			

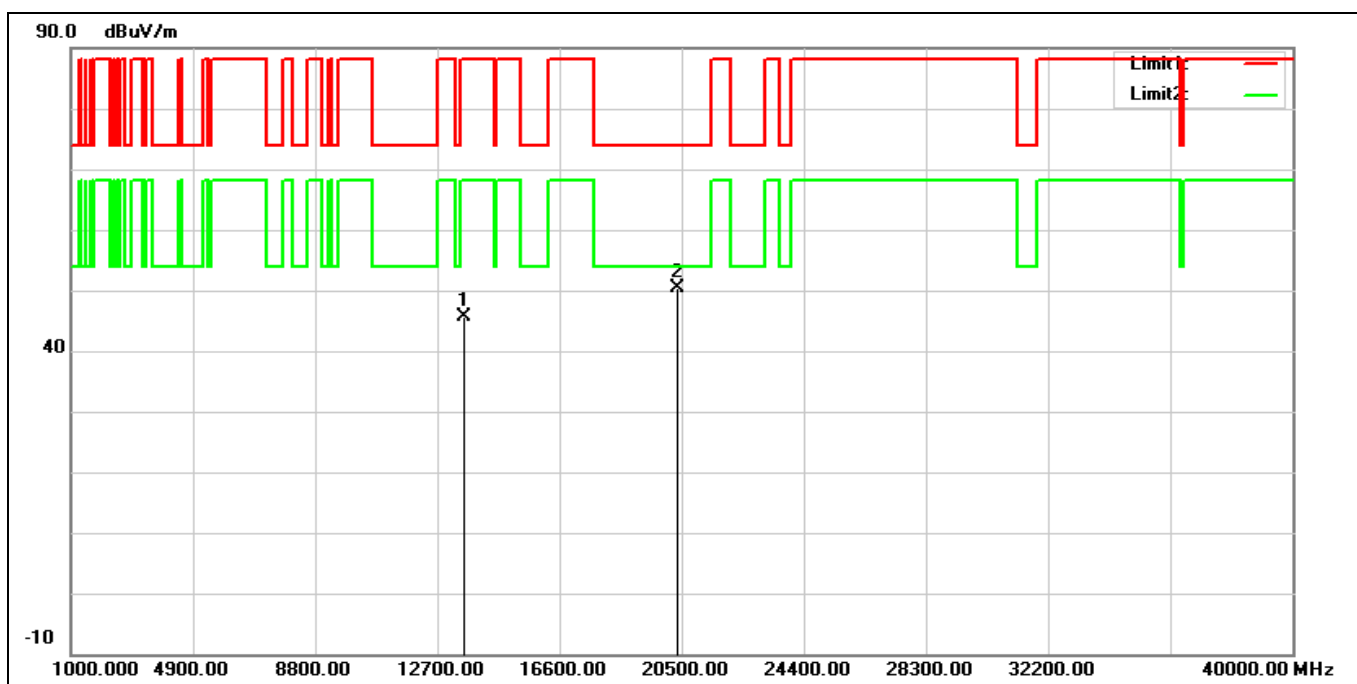


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	30.57	14.95	45.52	88.20	-42.68	peak
2*	20355.000	30.27	20.19	50.46	74.00	-23.54	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6785 MHz		
Remark:			

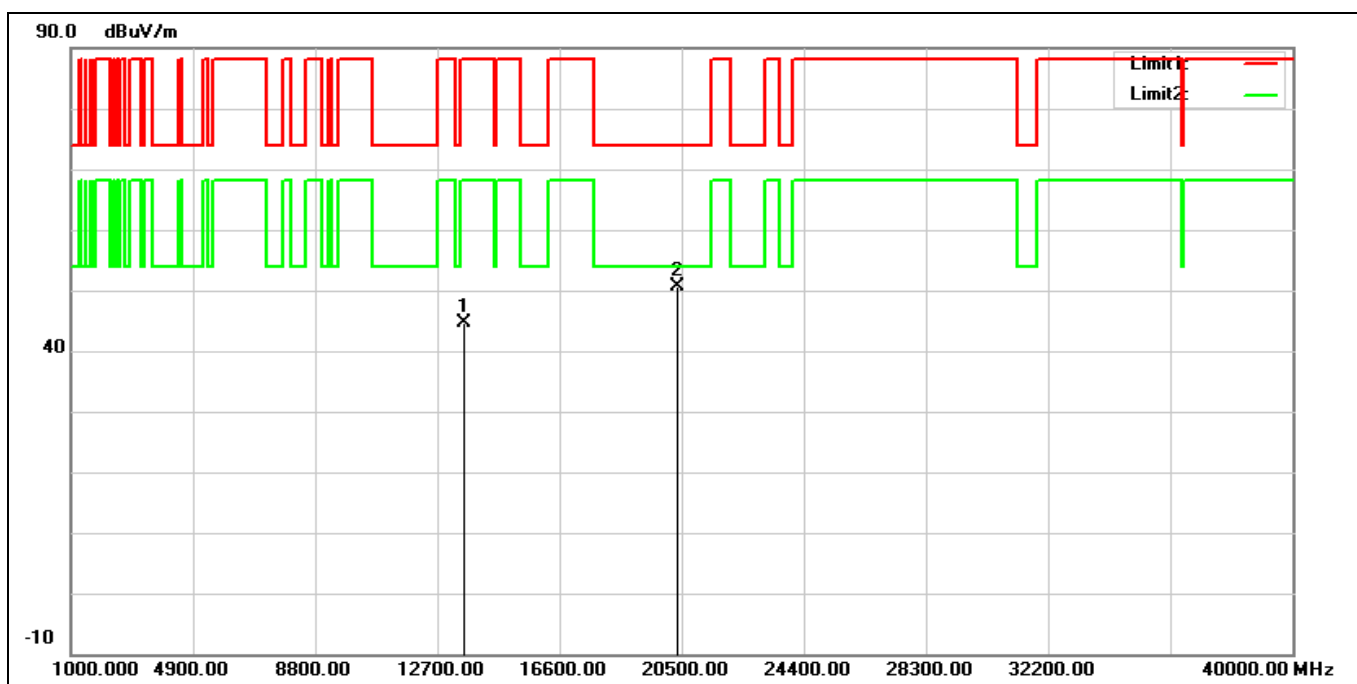


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13570.000	29.68	14.95	44.63	88.20	-43.57	peak
2*	20355.000	30.37	20.19	50.56	74.00	-23.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6865 MHz		
Remark:			

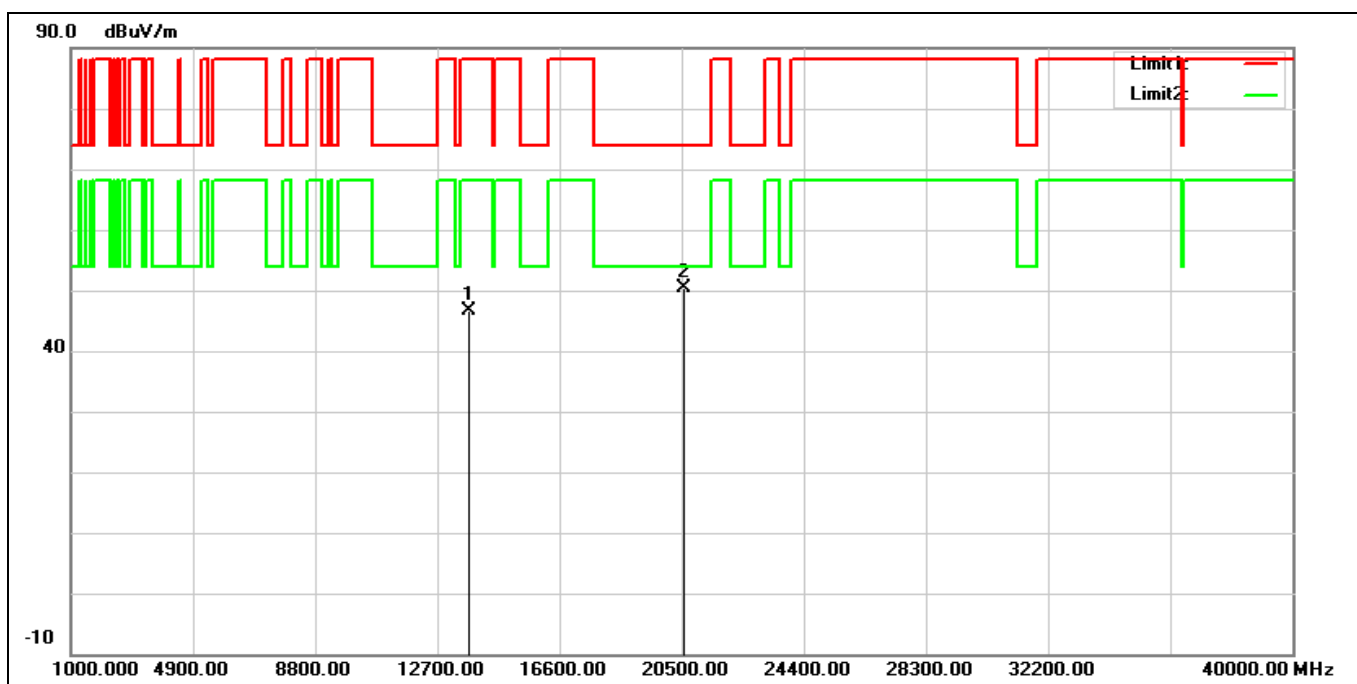


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	30.52	16.05	46.57	88.20	-41.63	peak
2*	20595.000	30.29	20.03	50.32	74.00	-23.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6865 MHz		
Remark:			

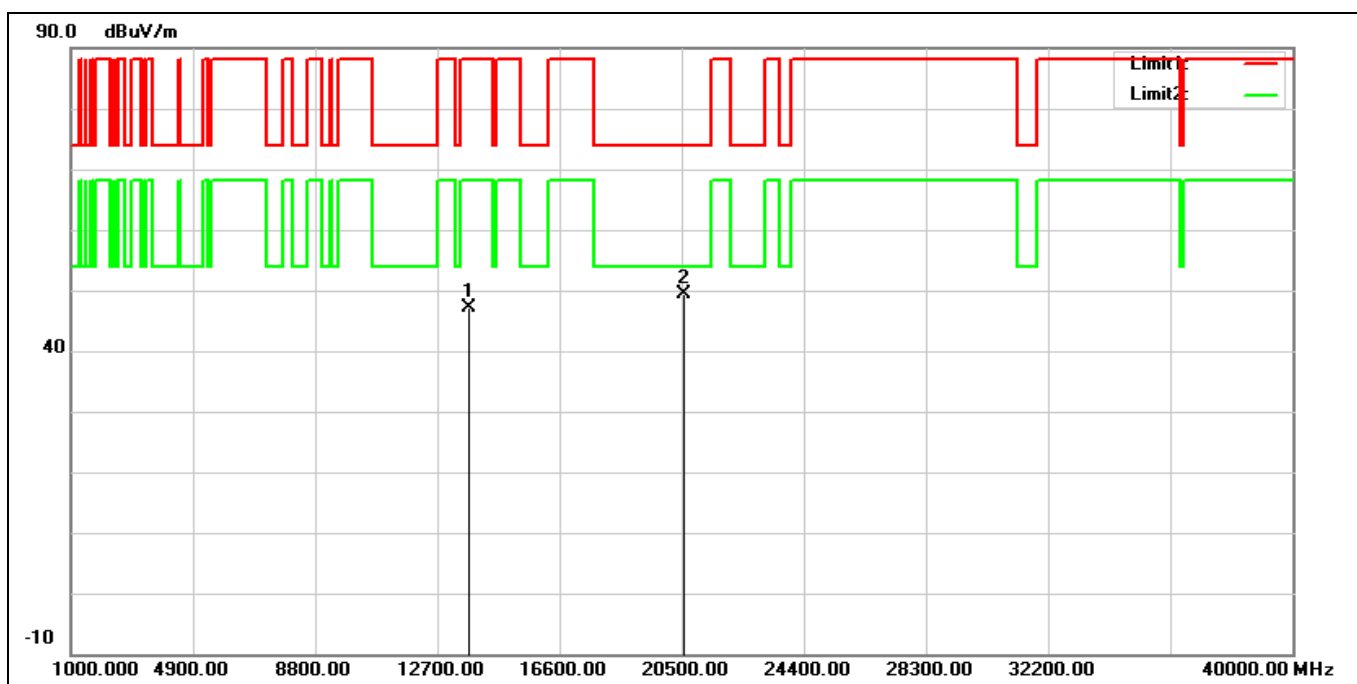


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13730.000	31.07	16.05	47.12	88.20	-41.08	peak
2*	20595.000	29.36	20.03	49.39	74.00	-24.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6945 MHz		
Remark:			

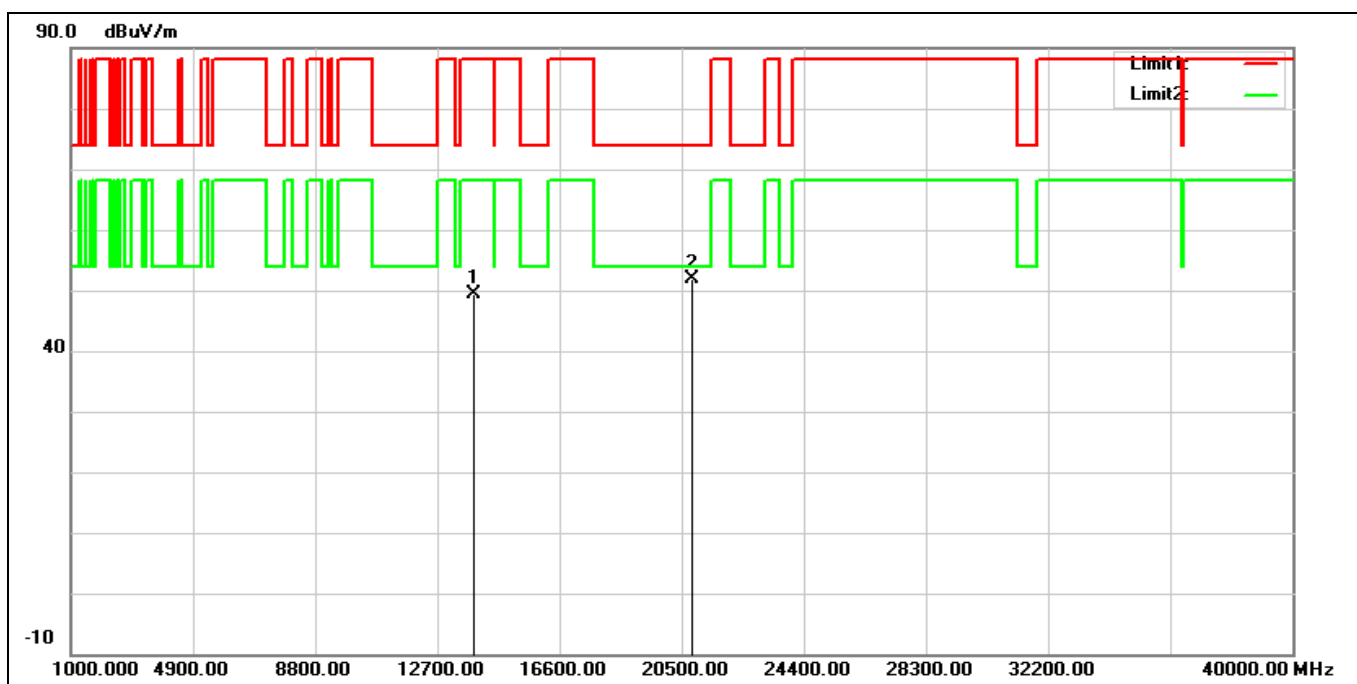


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	31.97	17.33	49.30	88.20	-38.90	peak
2*	20835.000	31.36	20.60	51.96	74.00	-22.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6945 MHz		
Remark:			

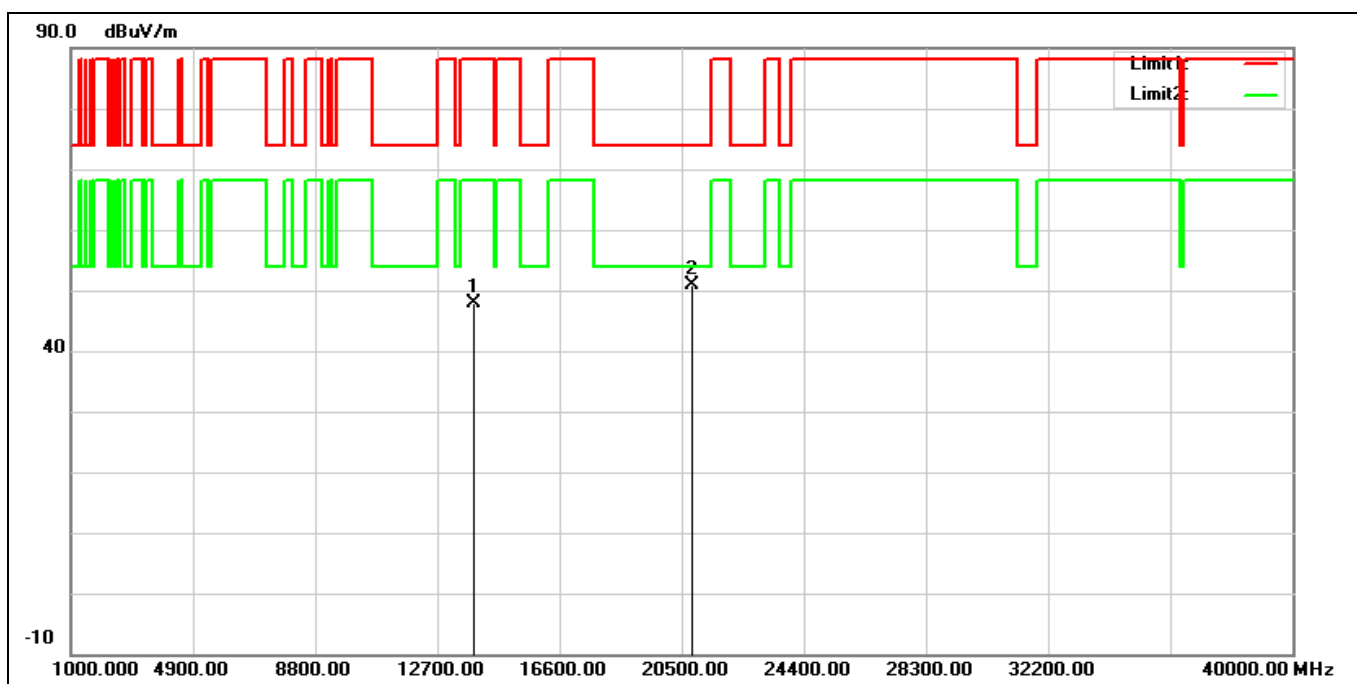


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13890.000	30.65	17.33	47.98	88.20	-40.22	peak
2*	20835.000	30.39	20.60	50.99	74.00	-23.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

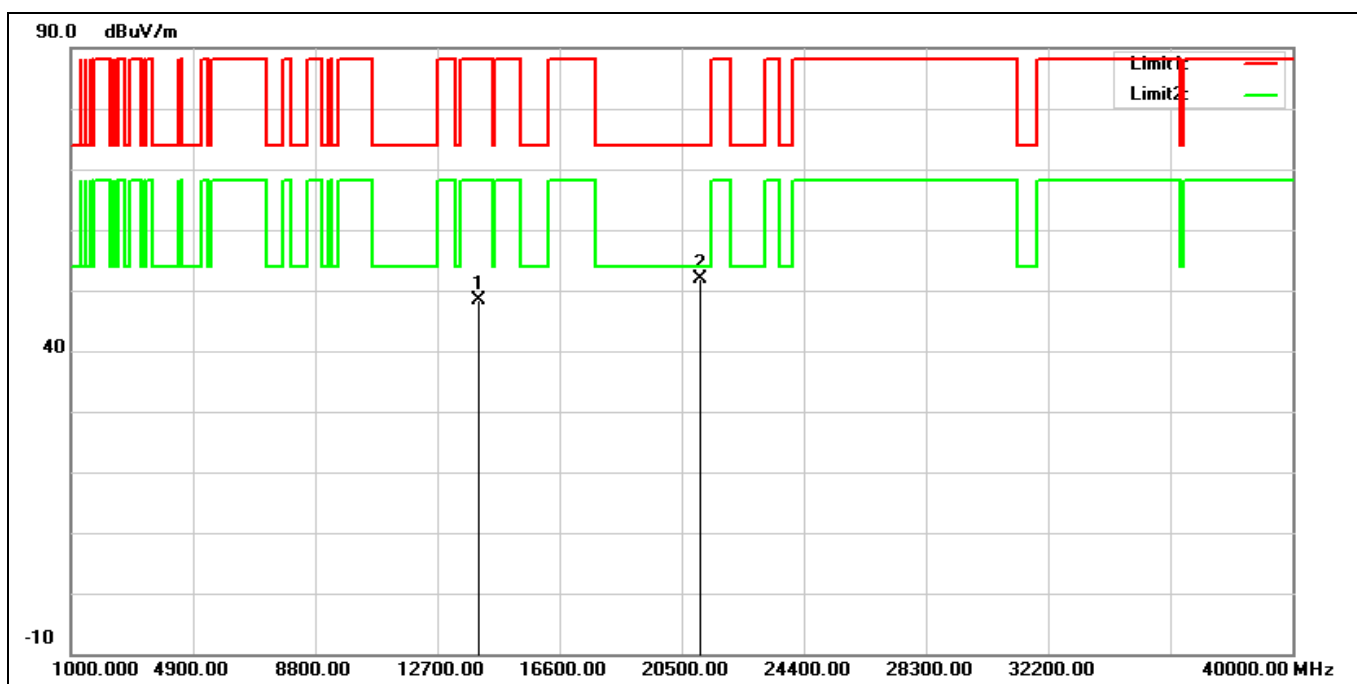


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	30.11	18.36	48.47	88.20	-39.73	peak
2*	21075.000	31.11	20.82	51.93	74.00	-22.07	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

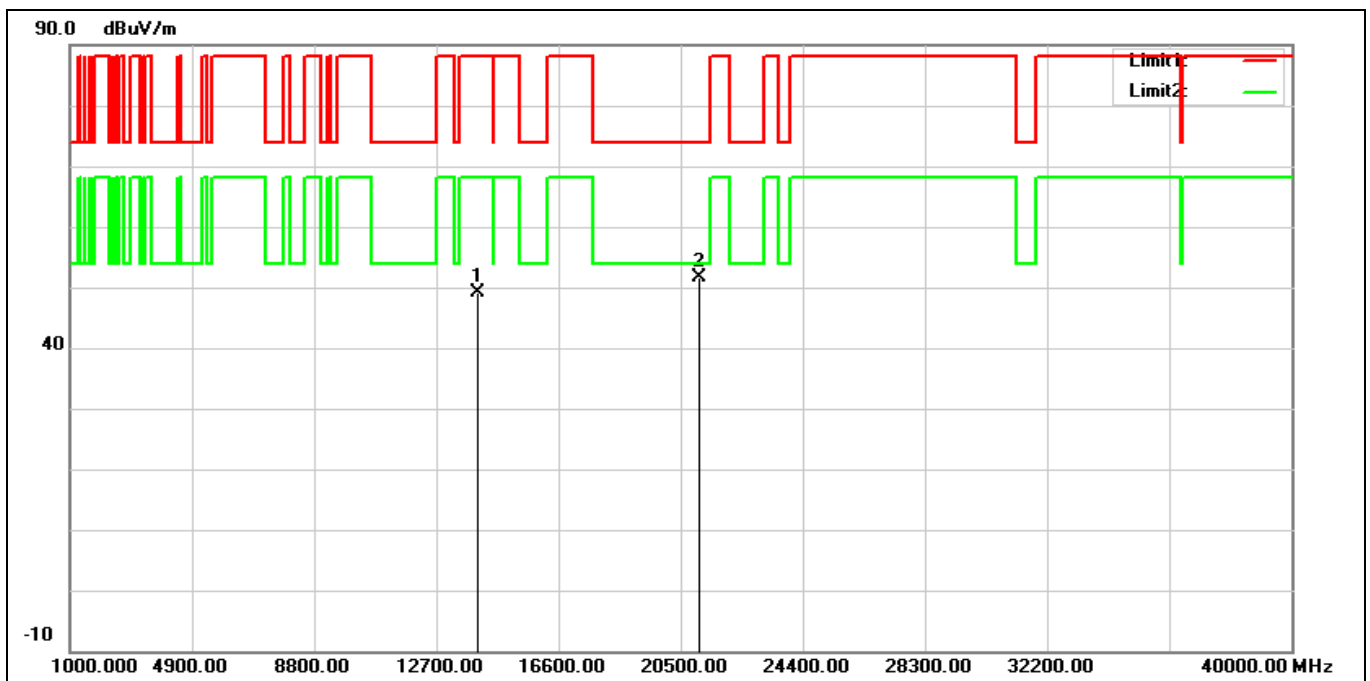


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14050.000	30.78	18.36	49.14	88.20	-39.06	peak
2*	21075.000	30.70	20.82	51.52	74.00	-22.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

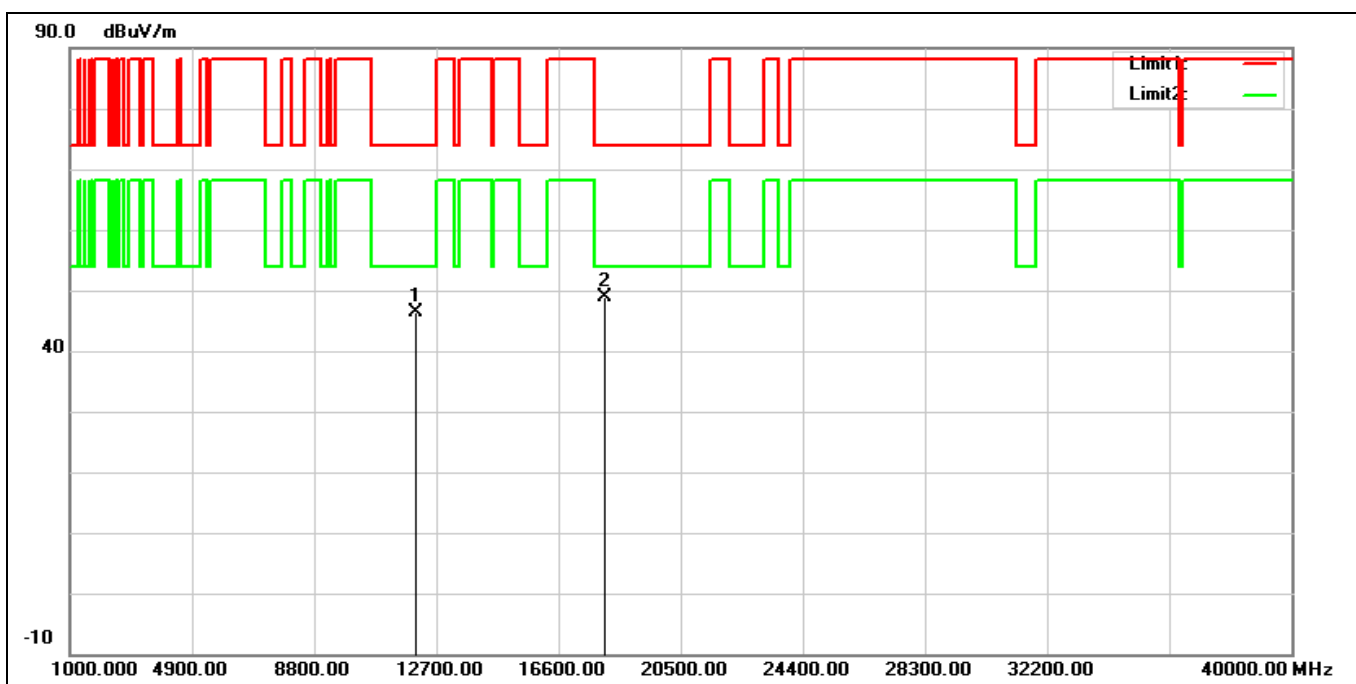


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12050.000	32.25	14.23	46.48	74.00	-27.52	peak
2*	18075.000	30.58	18.29	48.87	74.00	-25.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

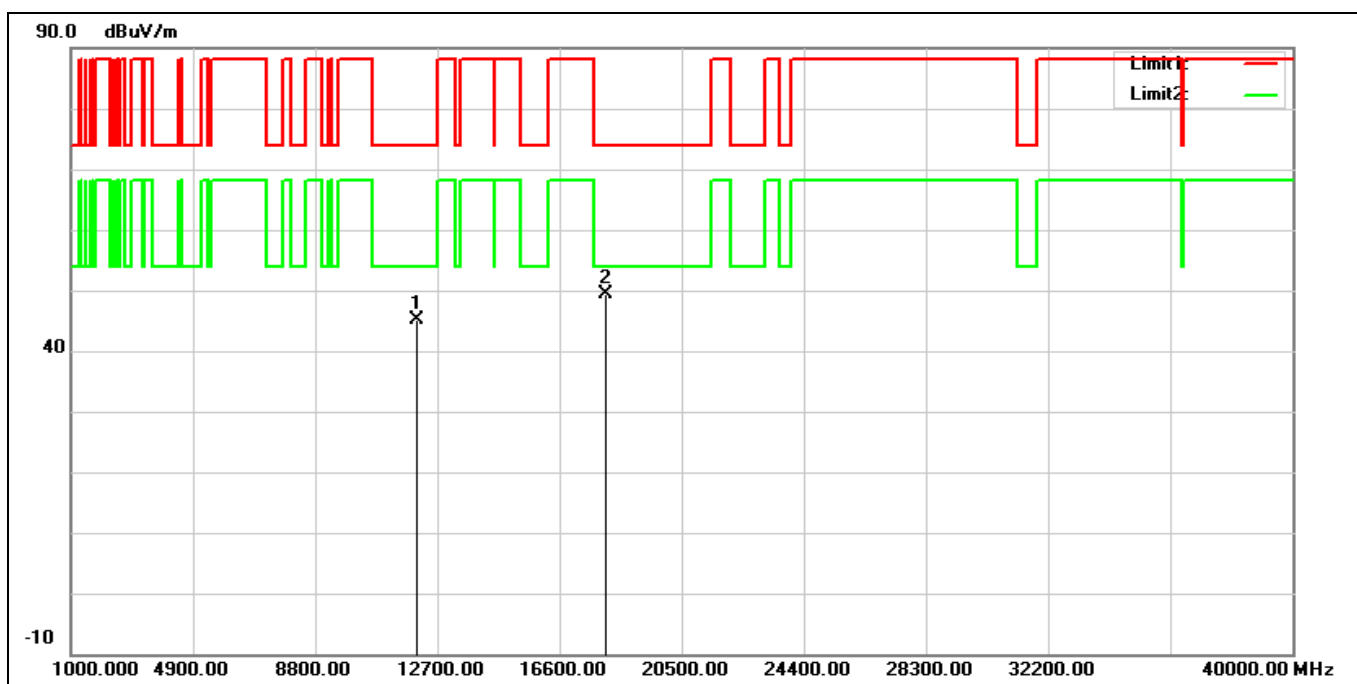


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12050.000	30.87	14.23	45.10	74.00	-28.90	peak
2*	18075.000	31.06	18.29	49.35	74.00	-24.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6185 MHz		
Remark:			

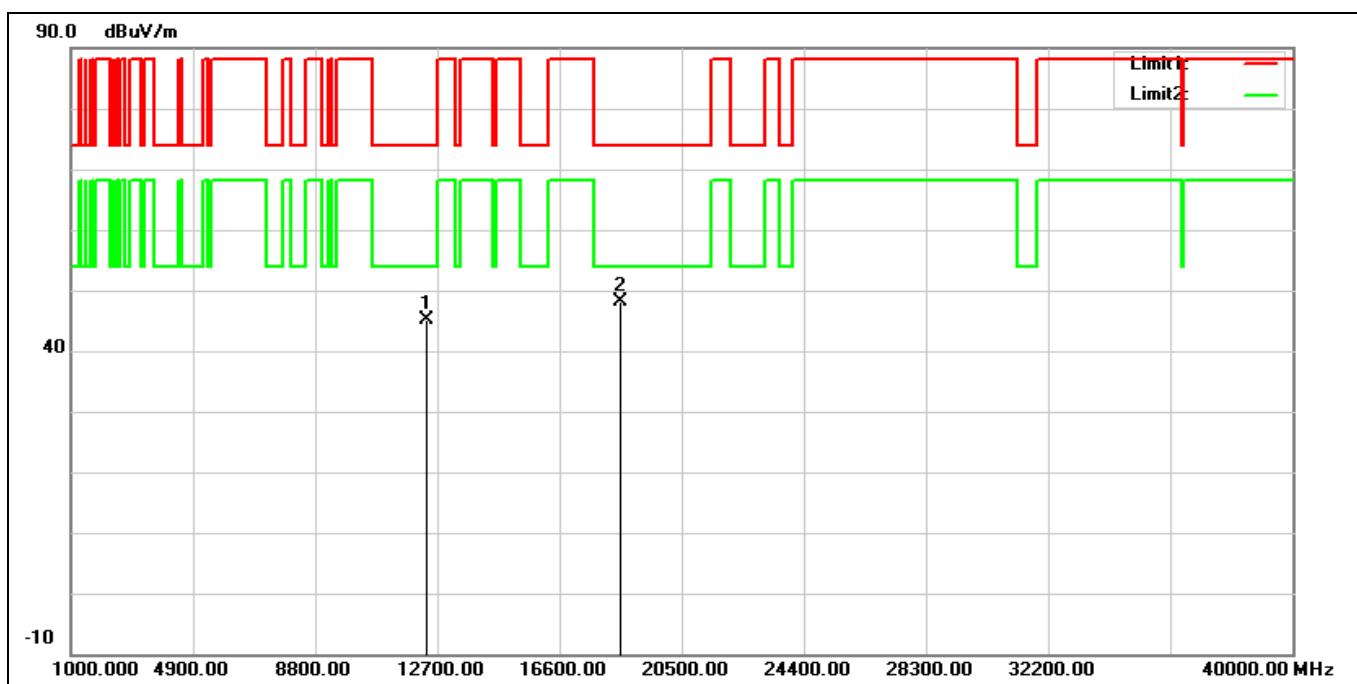


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12370.000	30.80	14.28	45.08	74.00	-28.92	peak
2*	18555.000	29.53	18.71	48.24	74.00	-25.76	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6185 MHz		
Remark:			

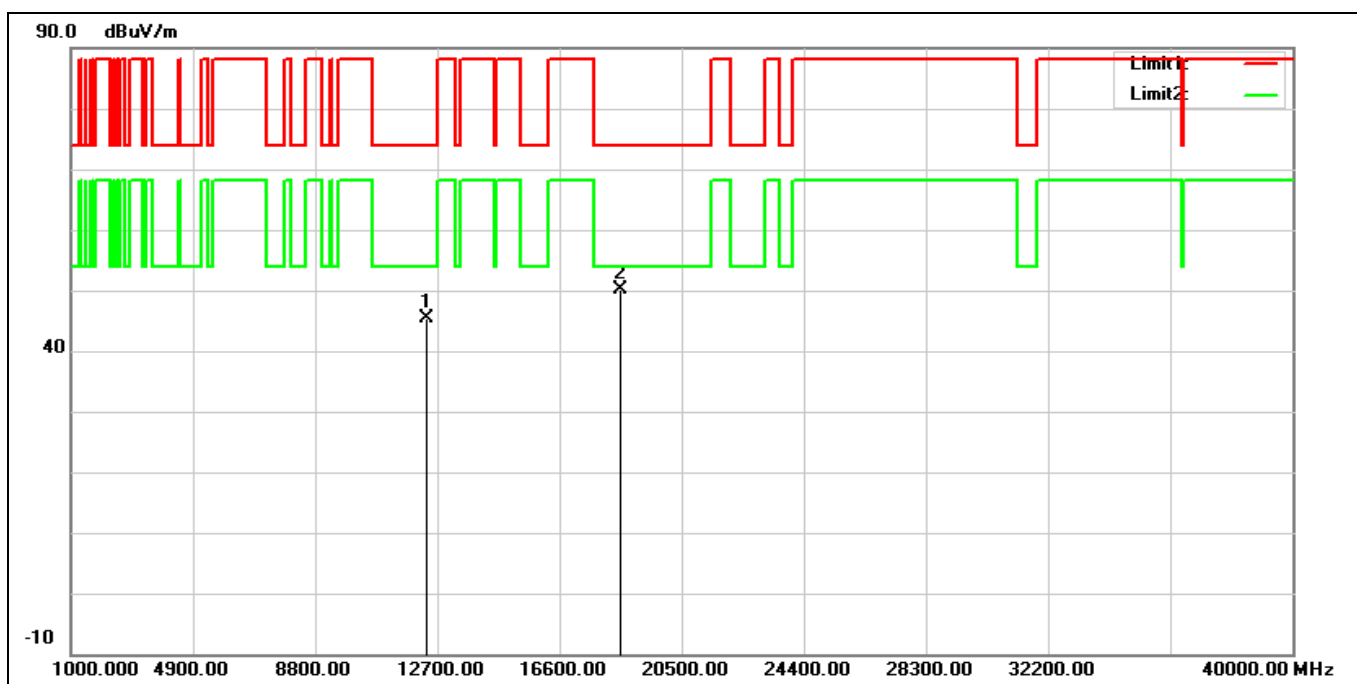


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12370.000	31.10	14.28	45.38	74.00	-28.62	peak
2*	18555.000	31.38	18.71	50.09	74.00	-23.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6345 MHz		
Remark:			

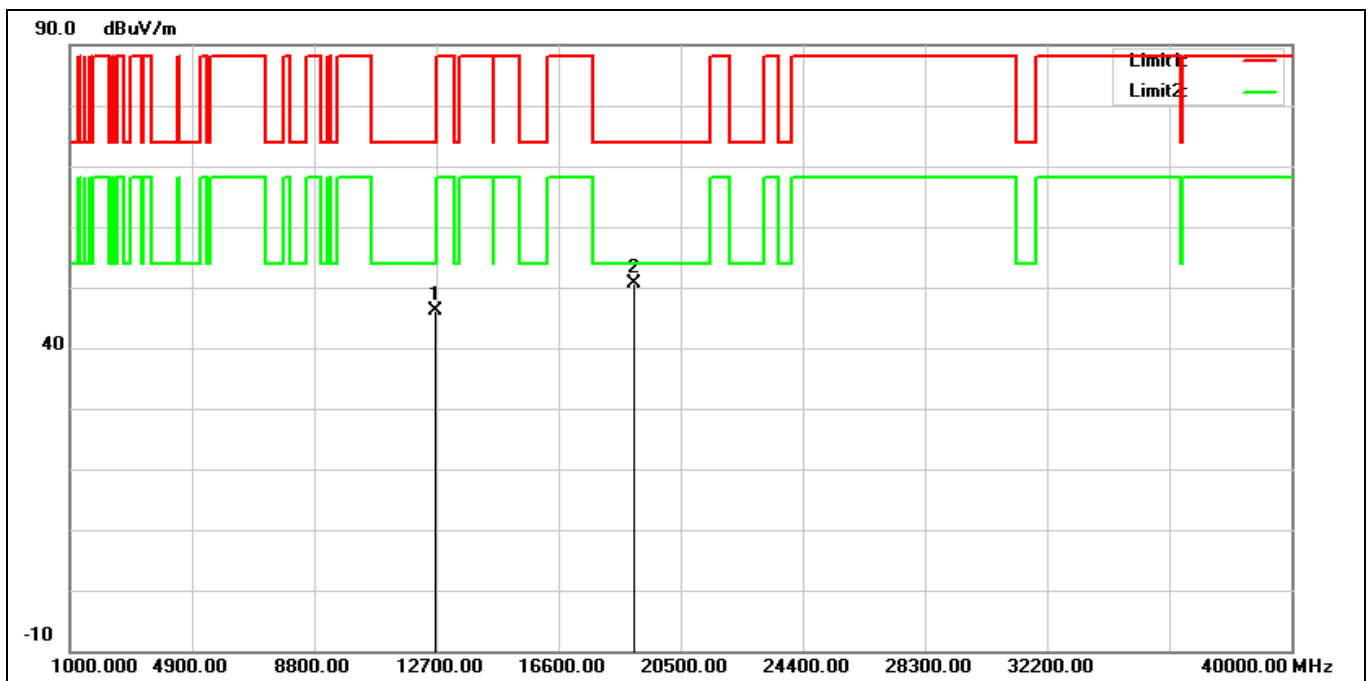


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	30.86	15.19	46.05	74.00	-27.95	peak
2*	19035.000	30.97	19.65	50.62	74.00	-23.38	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6345 MHz		
Remark:			

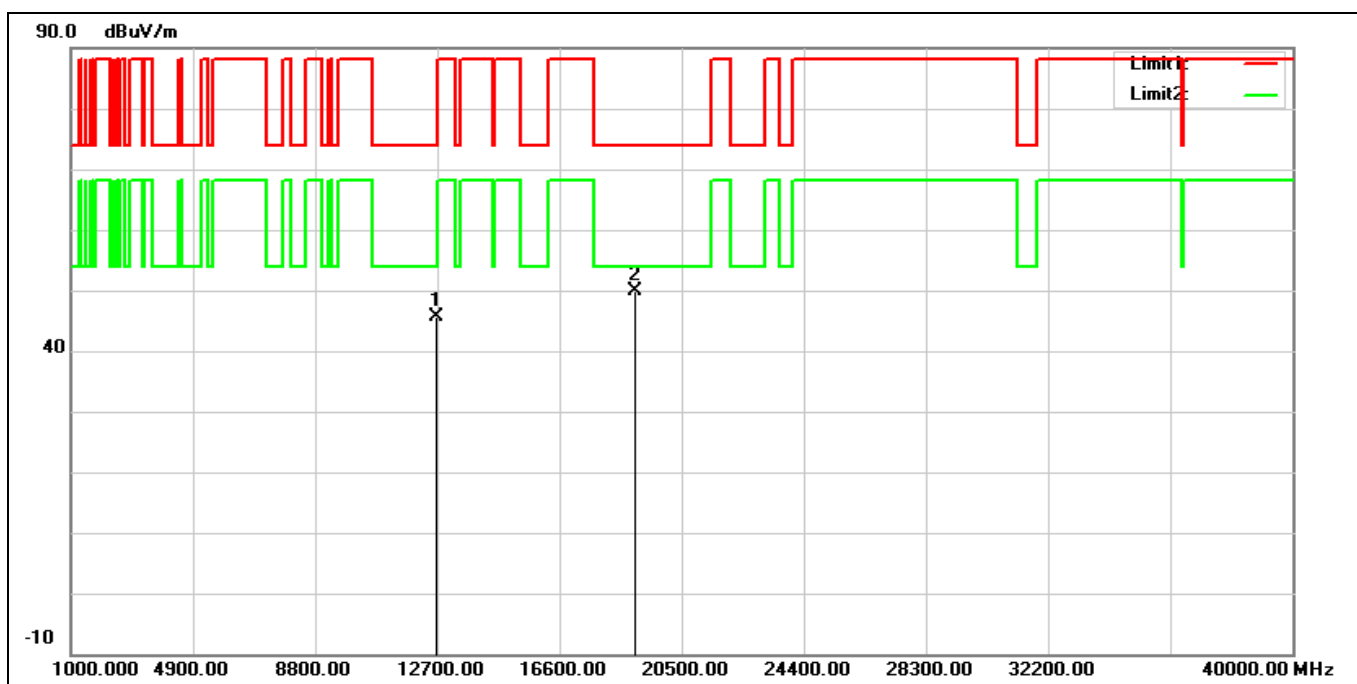


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12690.000	30.48	15.19	45.67	74.00	-28.33	peak
2*	19035.000	30.26	19.65	49.91	74.00	-24.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

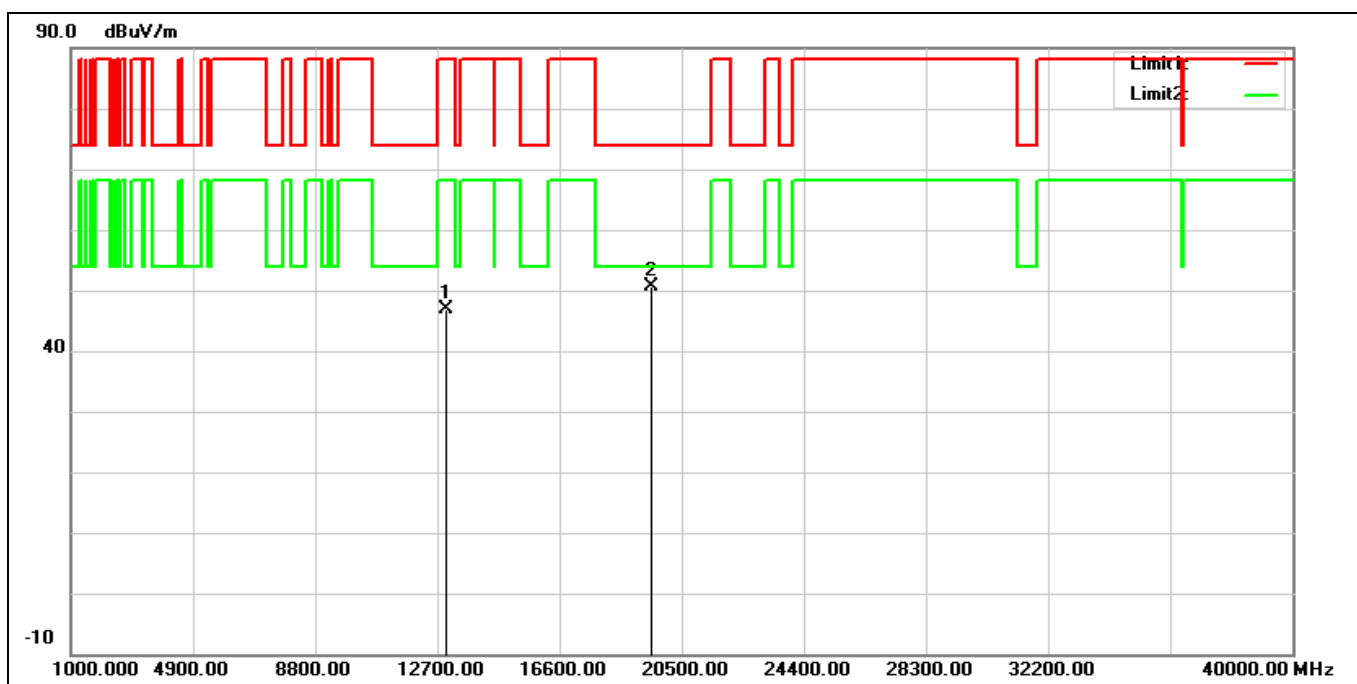


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	30.60	16.39	46.99	88.20	-41.21	peak
2*	19515.000	29.98	20.76	50.74	74.00	-23.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

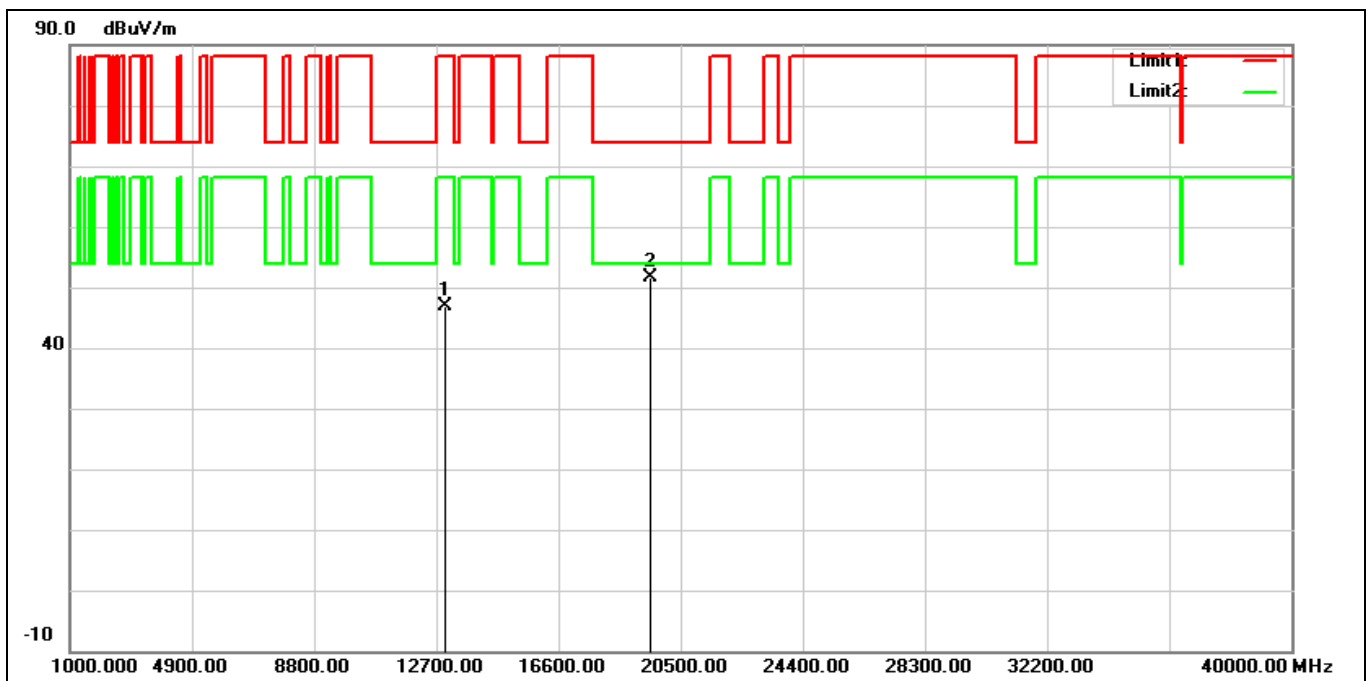


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	30.49	16.39	46.88	88.20	-41.32	peak
2*	19515.000	30.84	20.76	51.60	74.00	-22.40	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

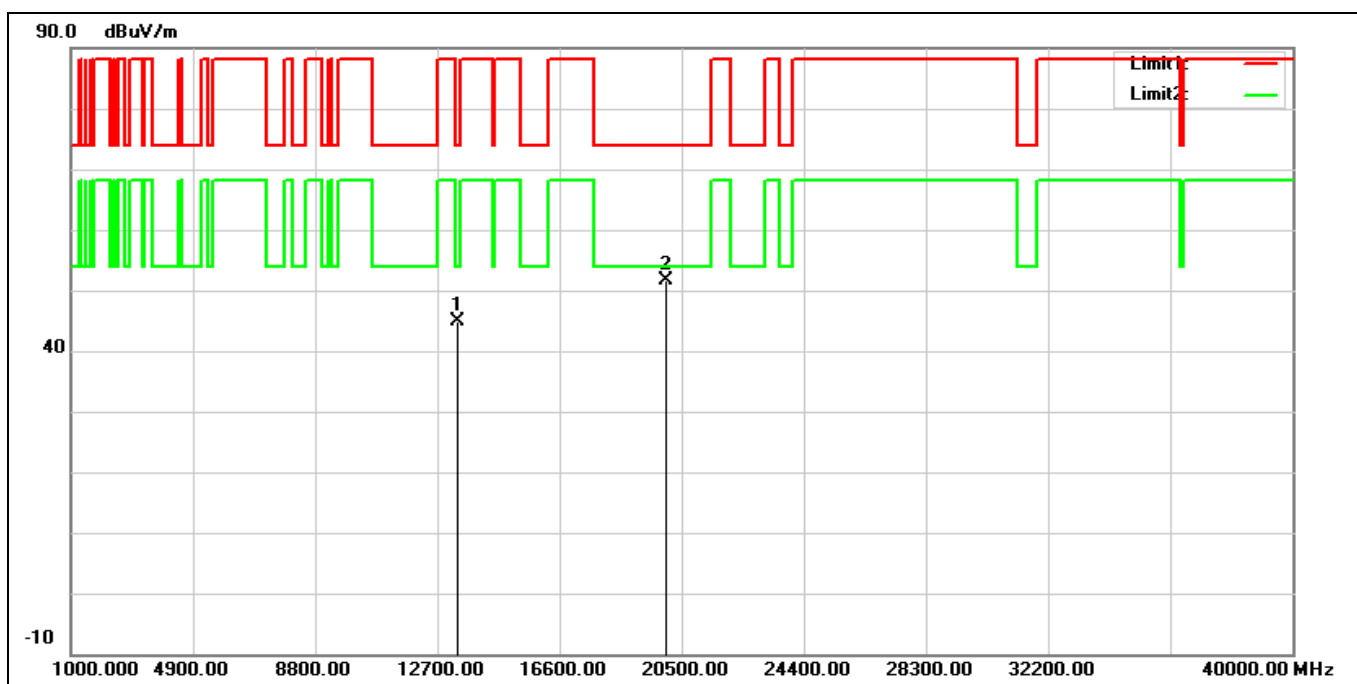


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	30.26	14.74	45.00	74.00	-29.00	peak
2*	19995.000	30.39	21.16	51.55	74.00	-22.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

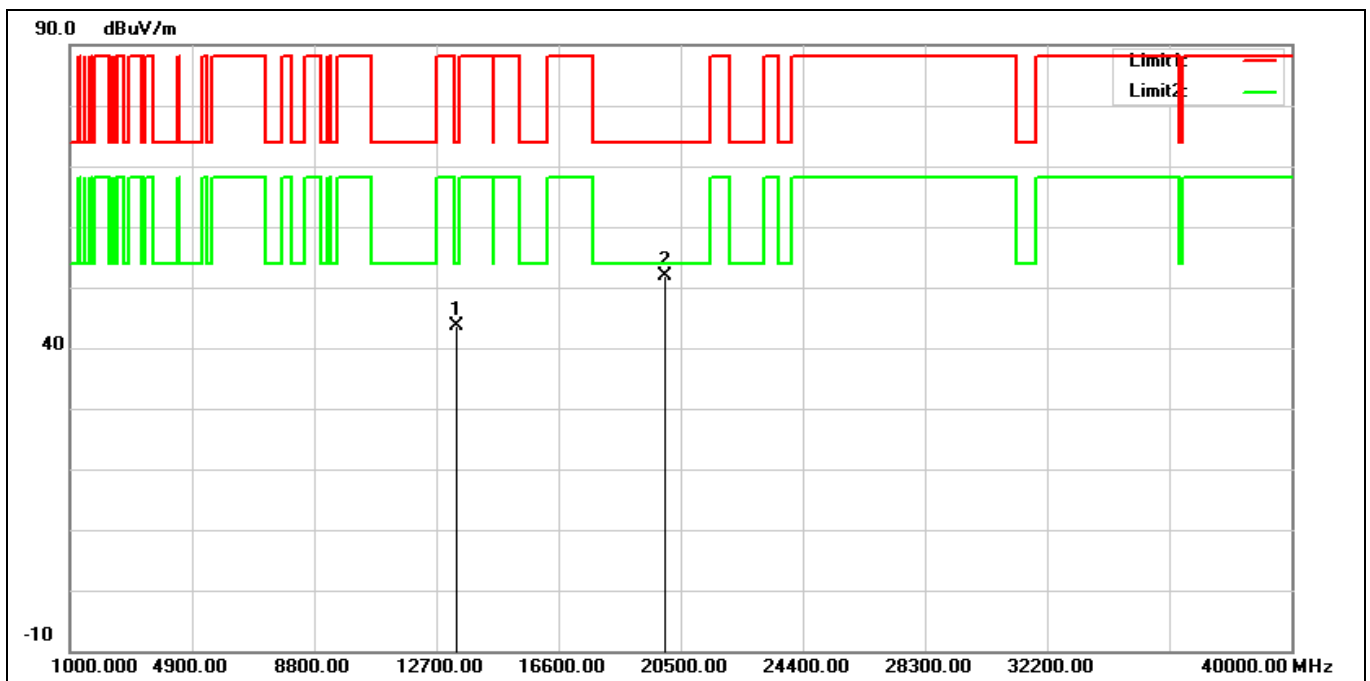


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	28.99	14.74	43.73	74.00	-30.27	peak
2*	19995.000	30.82	21.16	51.98	74.00	-22.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6825 MHz		
Remark:			

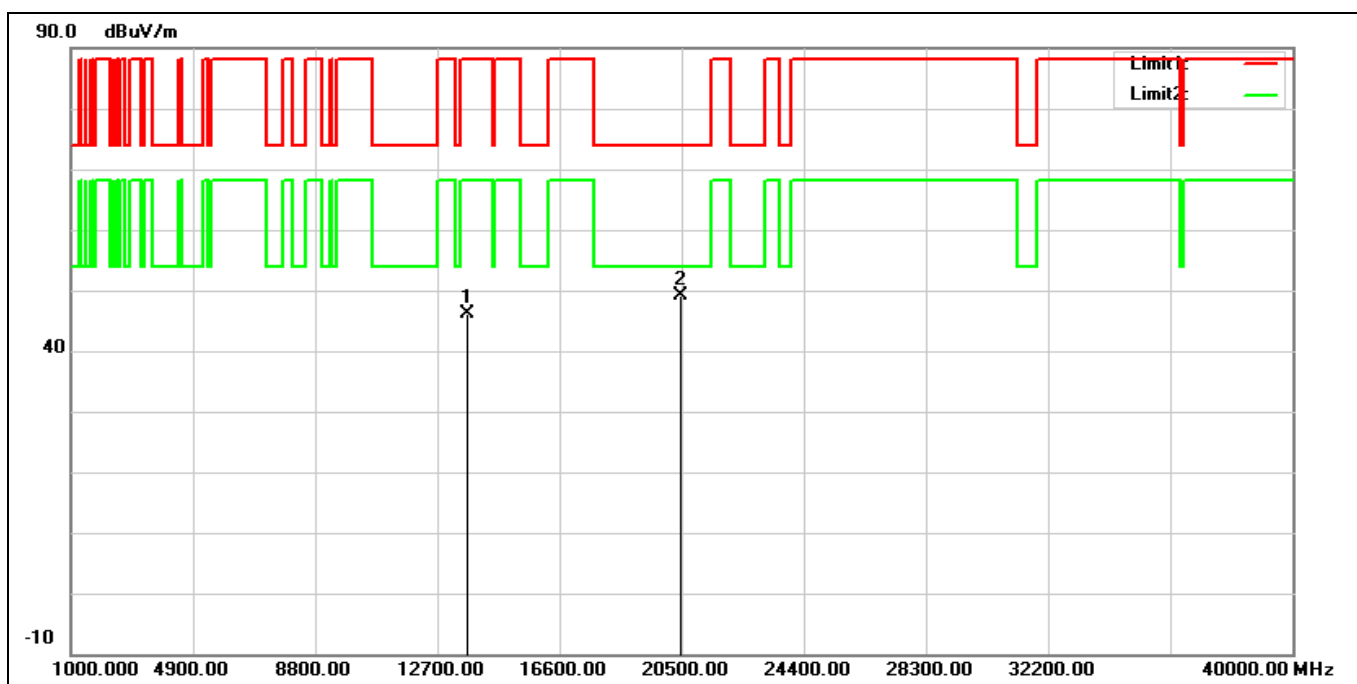


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	30.61	15.56	46.17	88.20	-42.03	peak
2*	20475.000	29.24	19.87	49.11	74.00	-24.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6825 MHz		
Remark:			

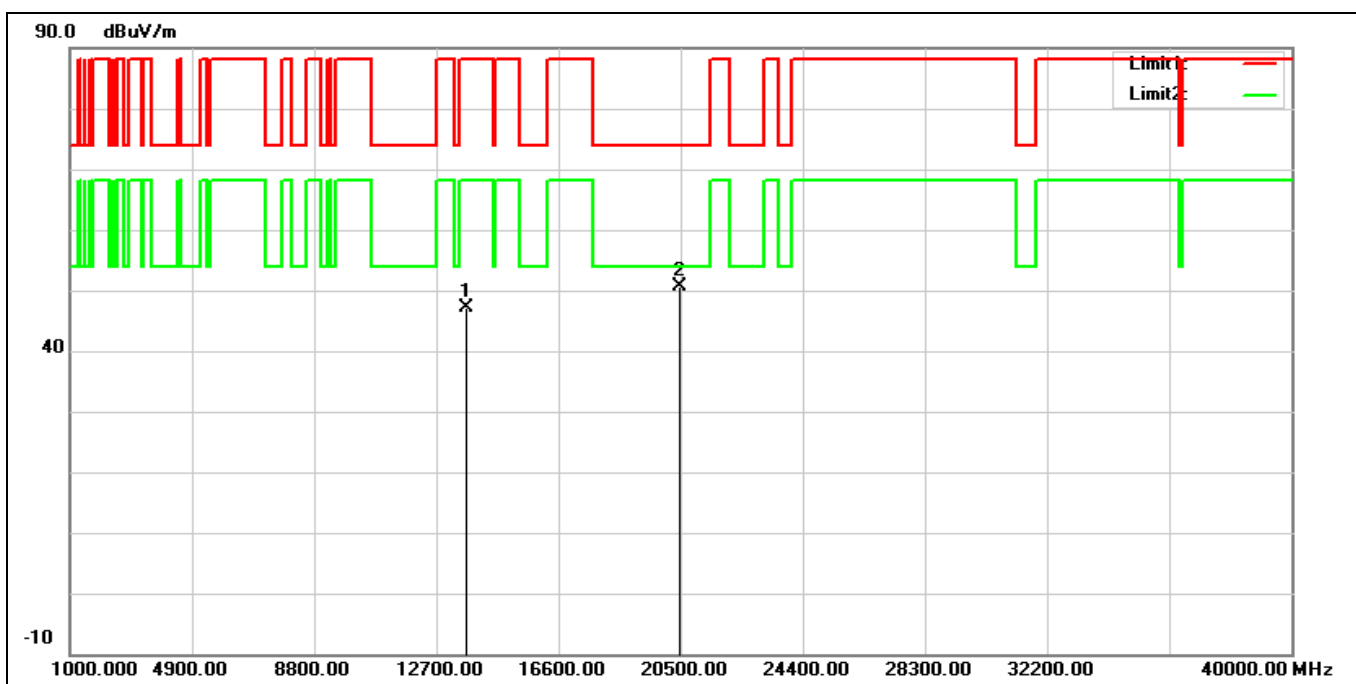


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	31.47	15.56	47.03	88.20	-41.17	peak
2*	20475.000	30.86	19.87	50.73	74.00	-23.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

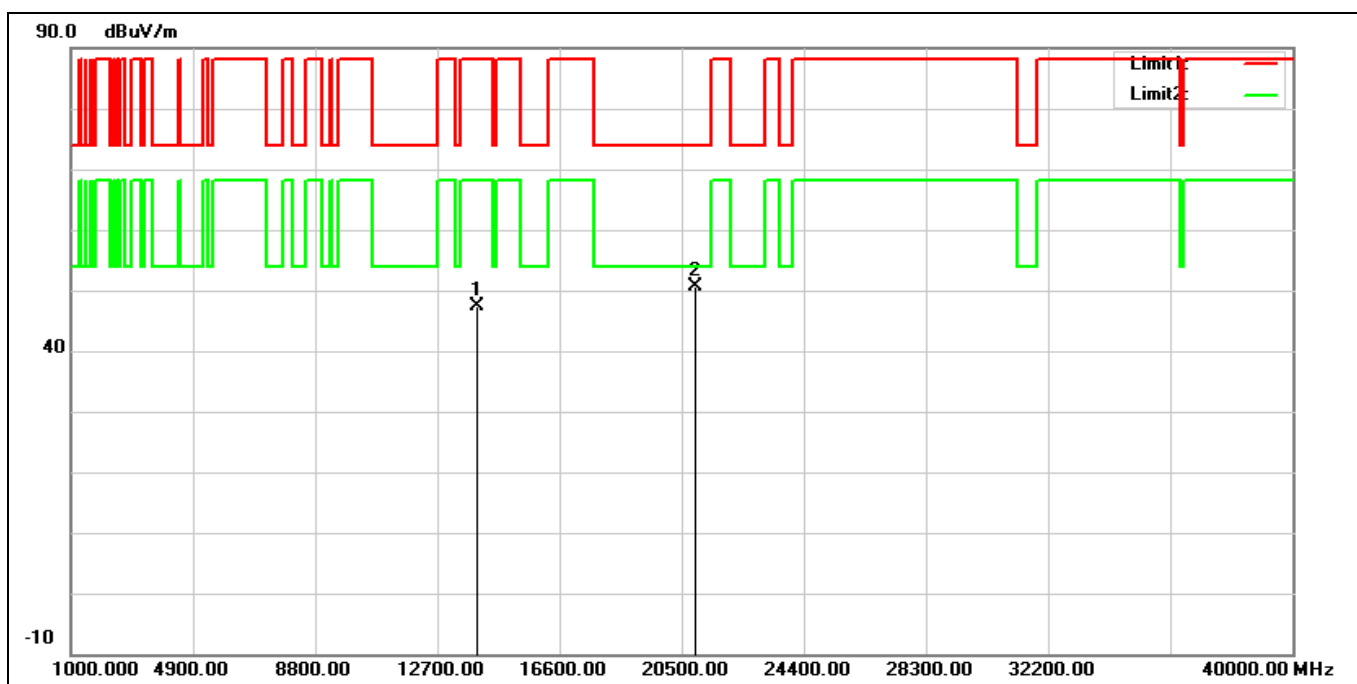


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	29.52	17.87	47.39	88.20	-40.81	peak
2*	20955.000	29.87	20.87	50.74	74.00	-23.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

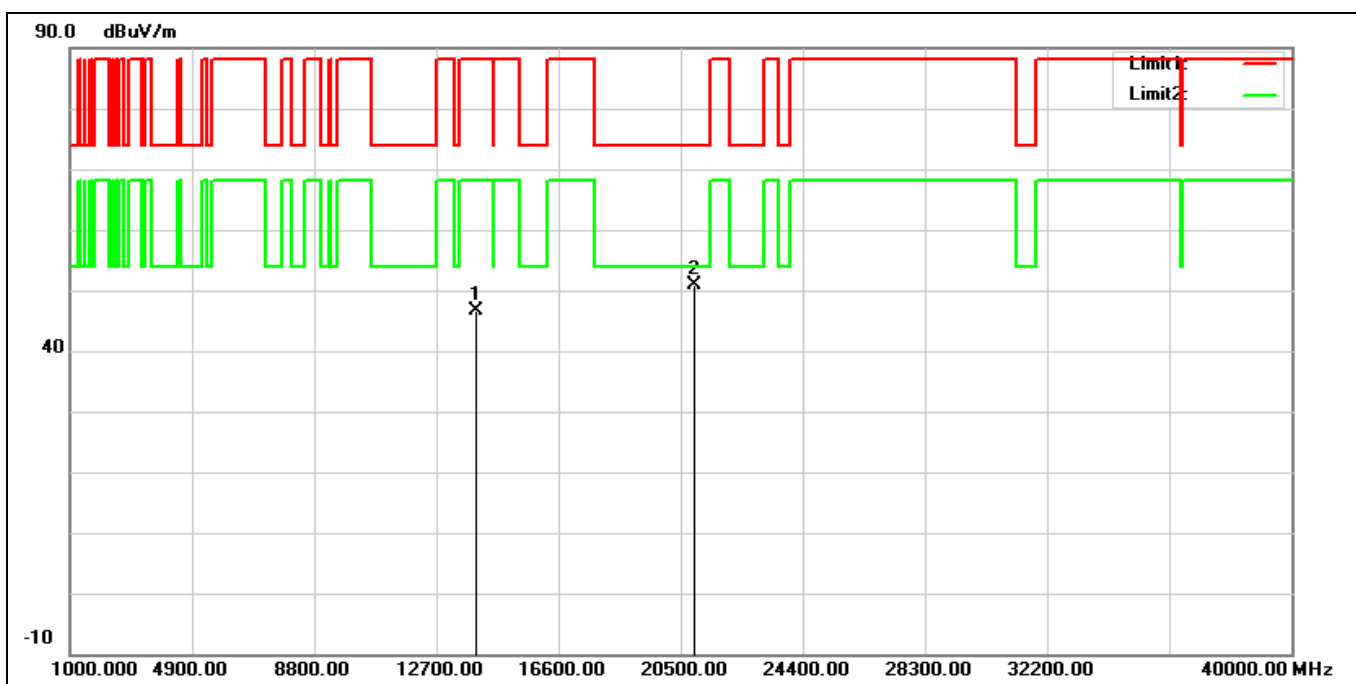


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	28.65	17.87	46.52	88.20	-41.68	peak
2*	20955.000	29.90	20.87	50.77	74.00	-23.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

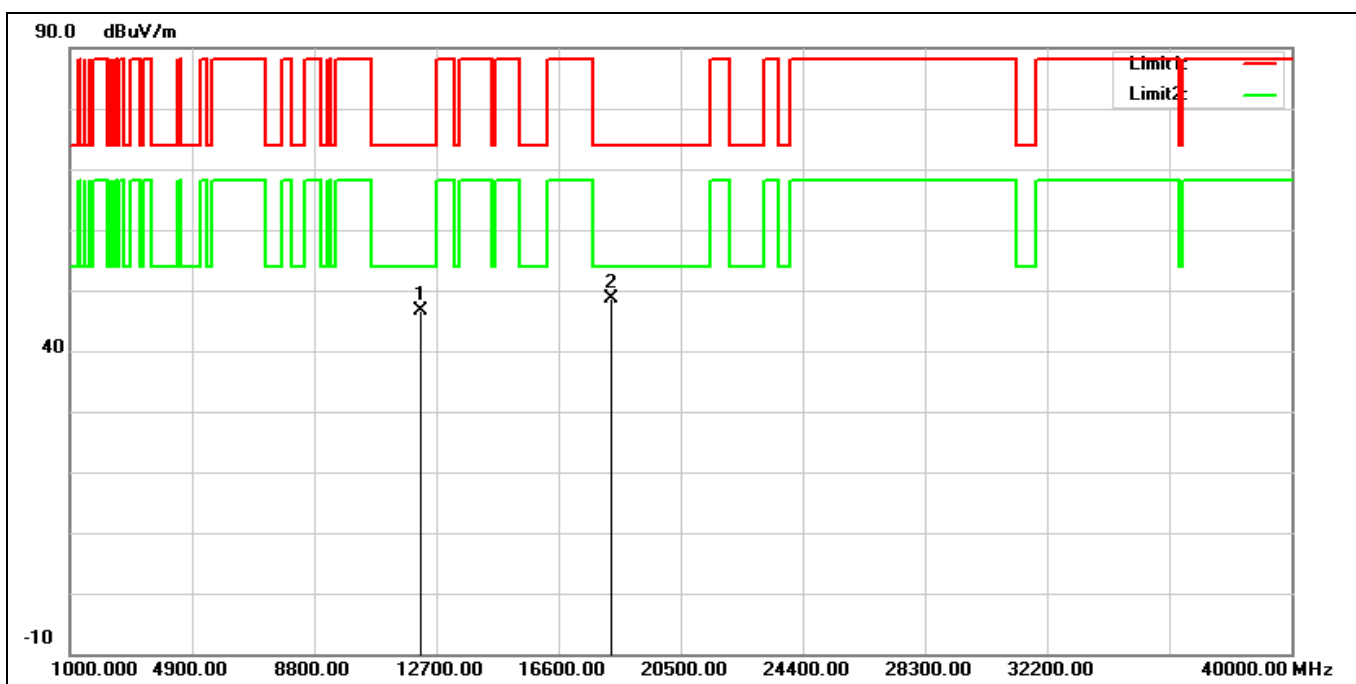


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12210.000	32.22	14.43	46.65	74.00	-27.35	peak
2*	18315.000	30.05	18.47	48.52	74.00	-25.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

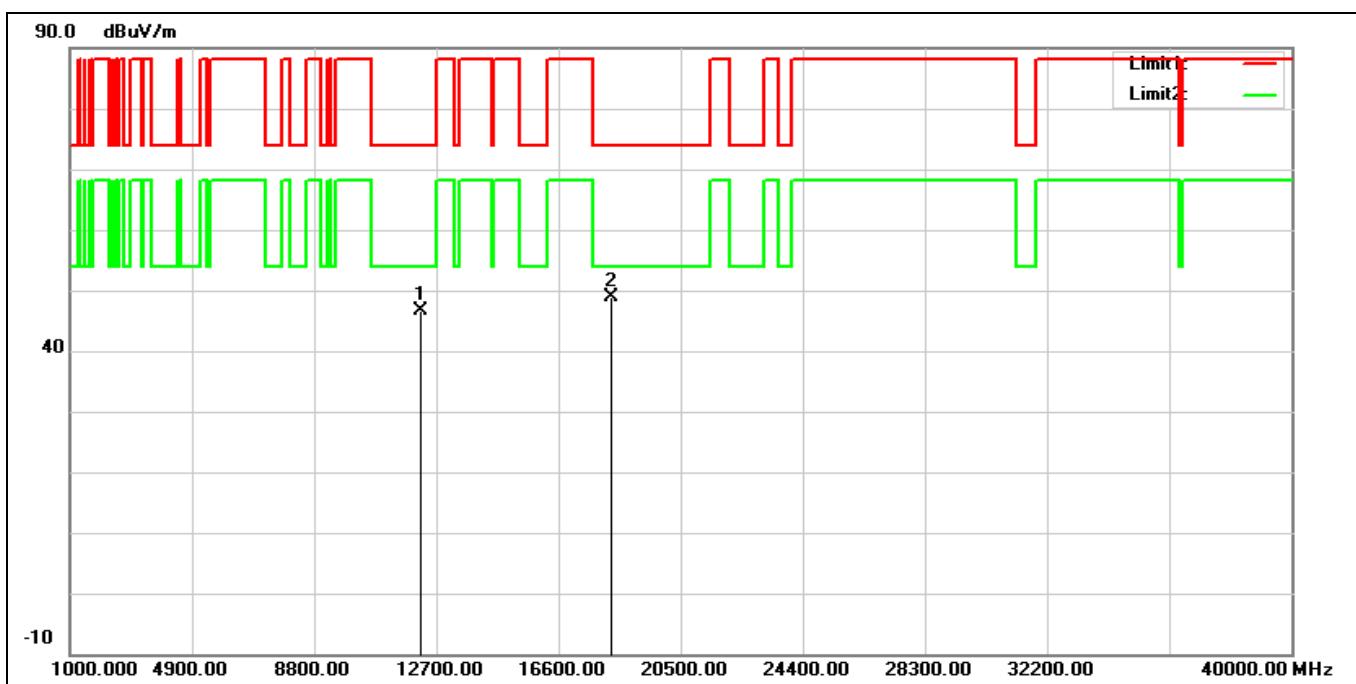


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12210.000	32.22	14.43	46.65	74.00	-27.35	peak
2*	18315.000	30.51	18.47	48.98	74.00	-25.02	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6265 MHz		
Remark:			

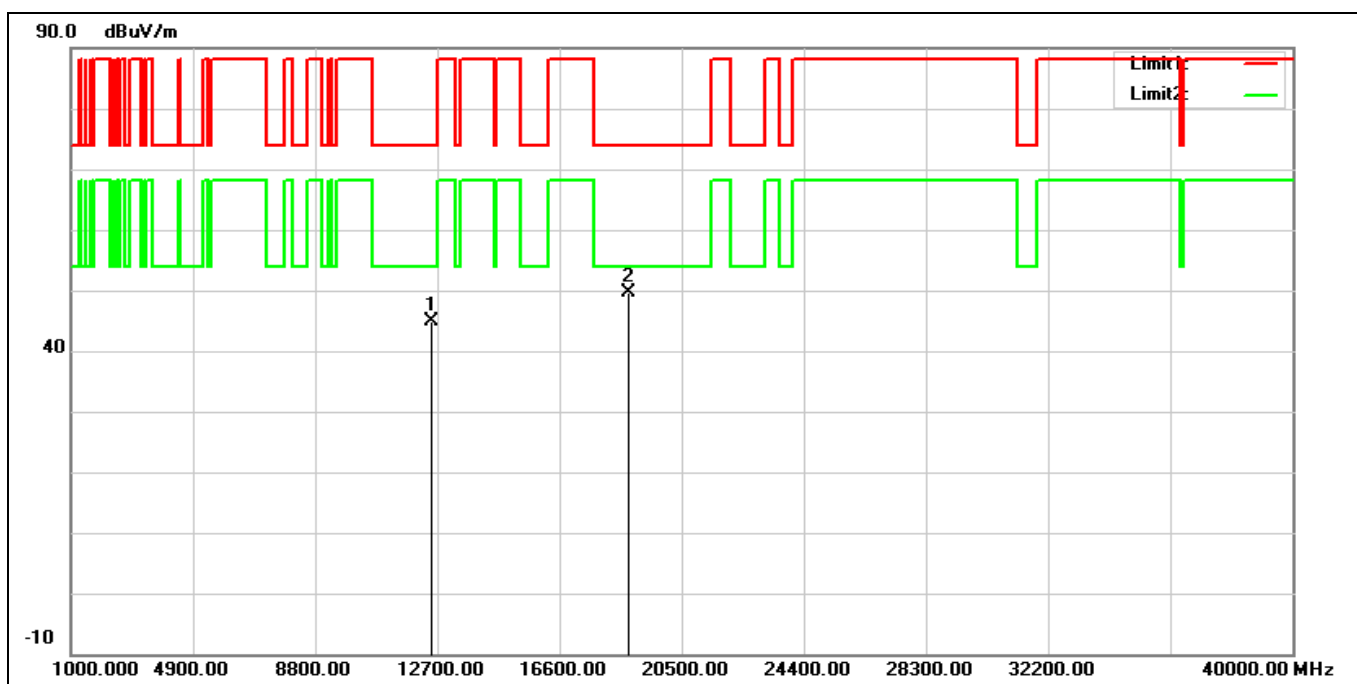


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12530.000	30.59	14.40	44.99	74.00	-29.01	peak
2*	18795.000	30.55	19.16	49.71	74.00	-24.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6265 MHz		
Remark:			

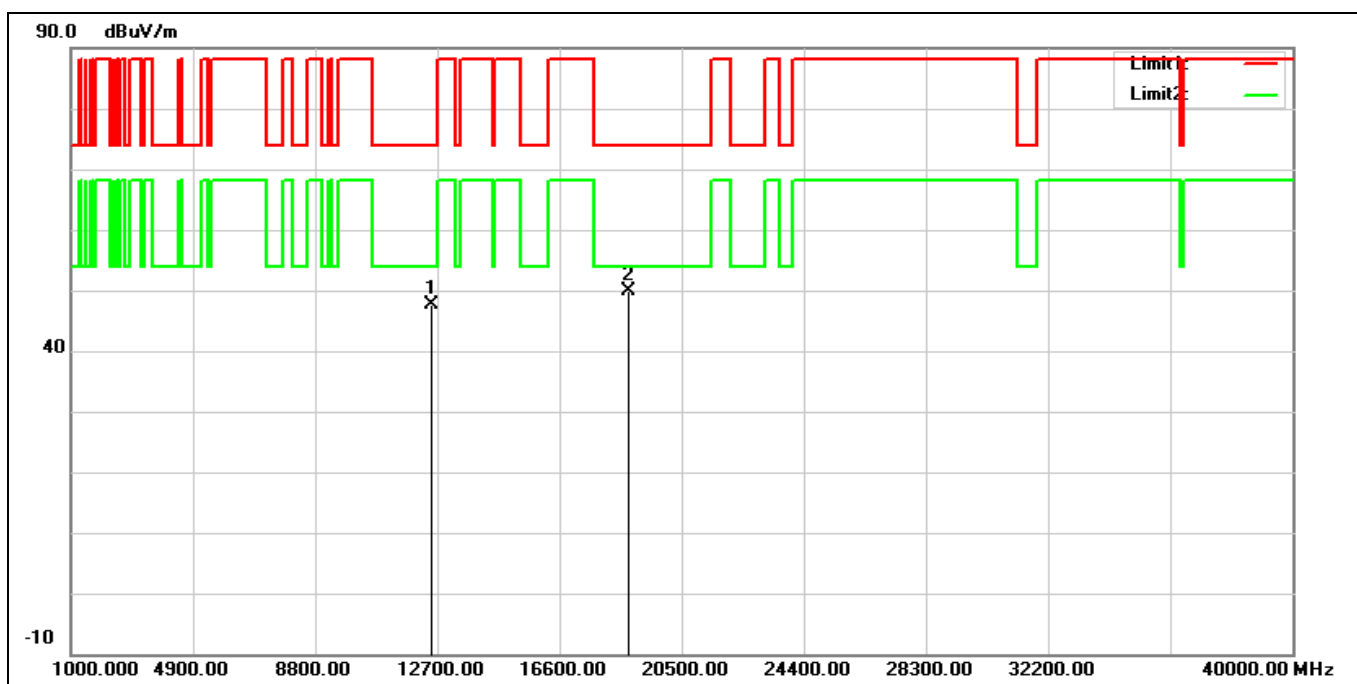


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12530.000	33.21	14.40	47.61	74.00	-26.39	peak
2*	18795.000	30.60	19.16	49.76	74.00	-24.24	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6425 MHz		
Remark:			

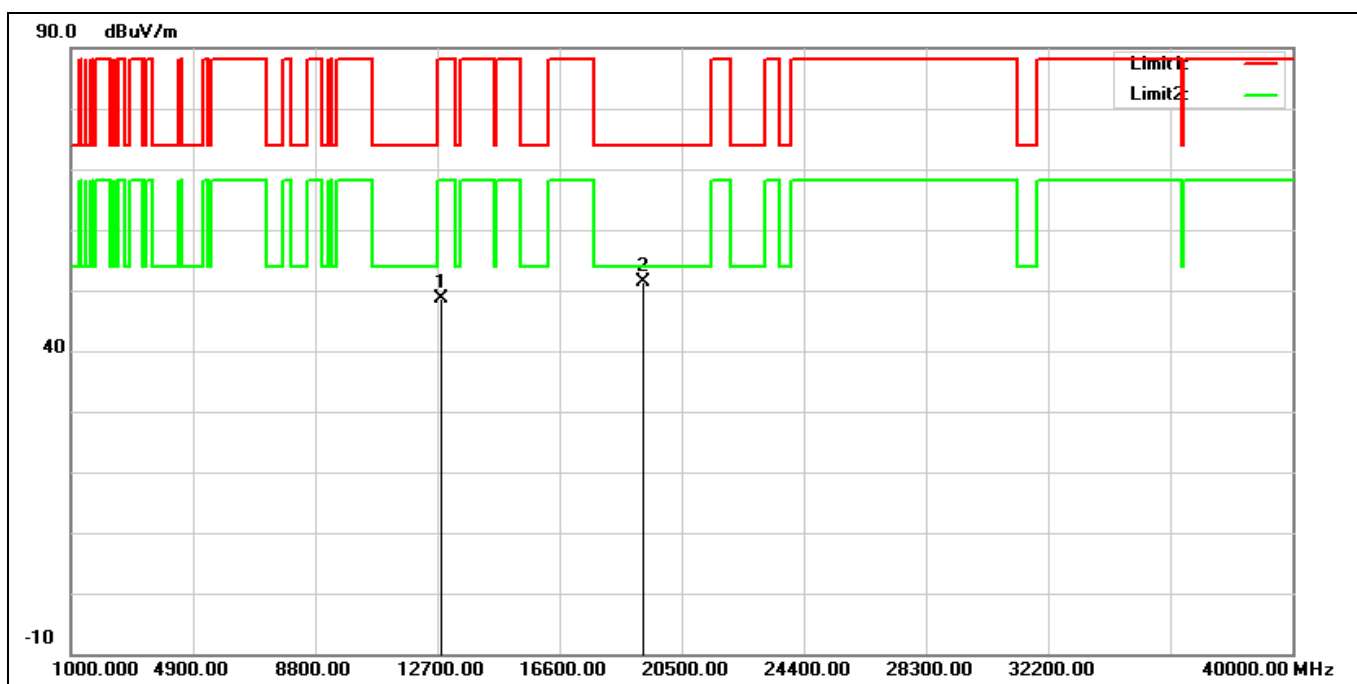


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	32.55	16.01	48.56	88.20	-39.64	peak
2*	19275.000	31.17	20.21	51.38	74.00	-22.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6425 MHz		
Remark:			

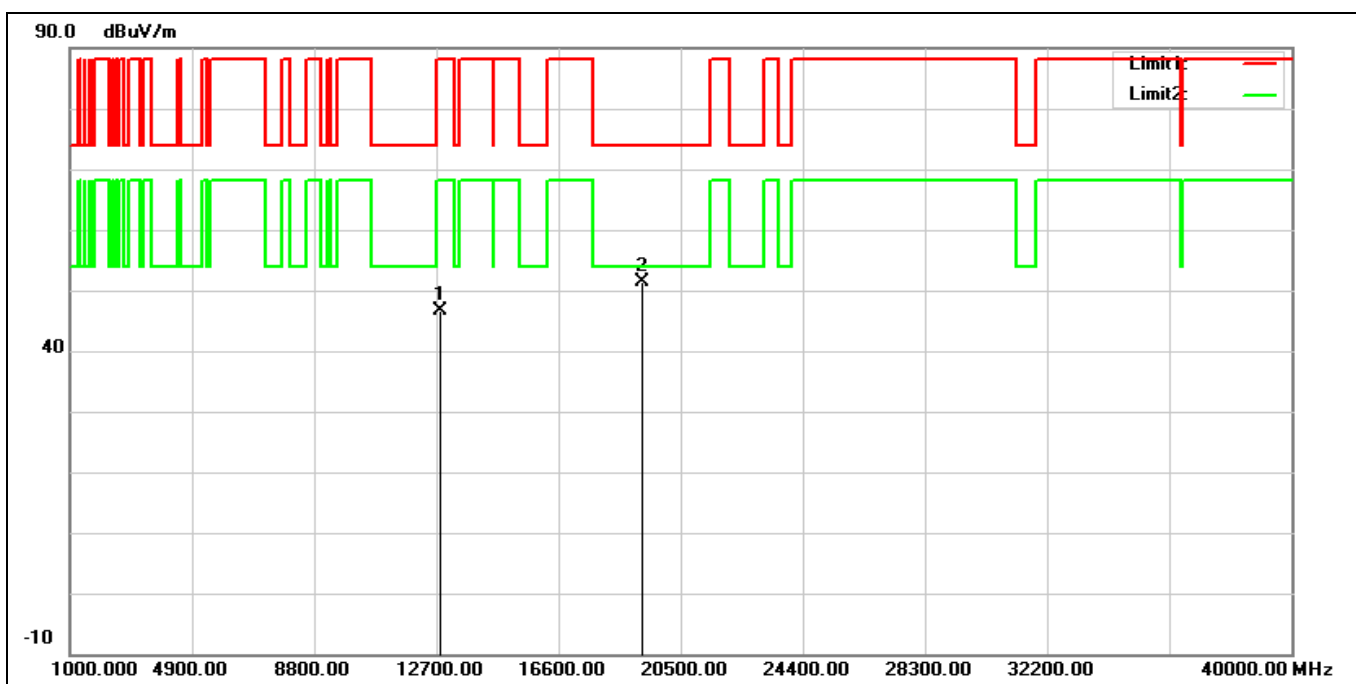


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	30.61	16.01	46.62	88.20	-41.58	peak
2*	19275.000	31.07	20.21	51.28	74.00	-22.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

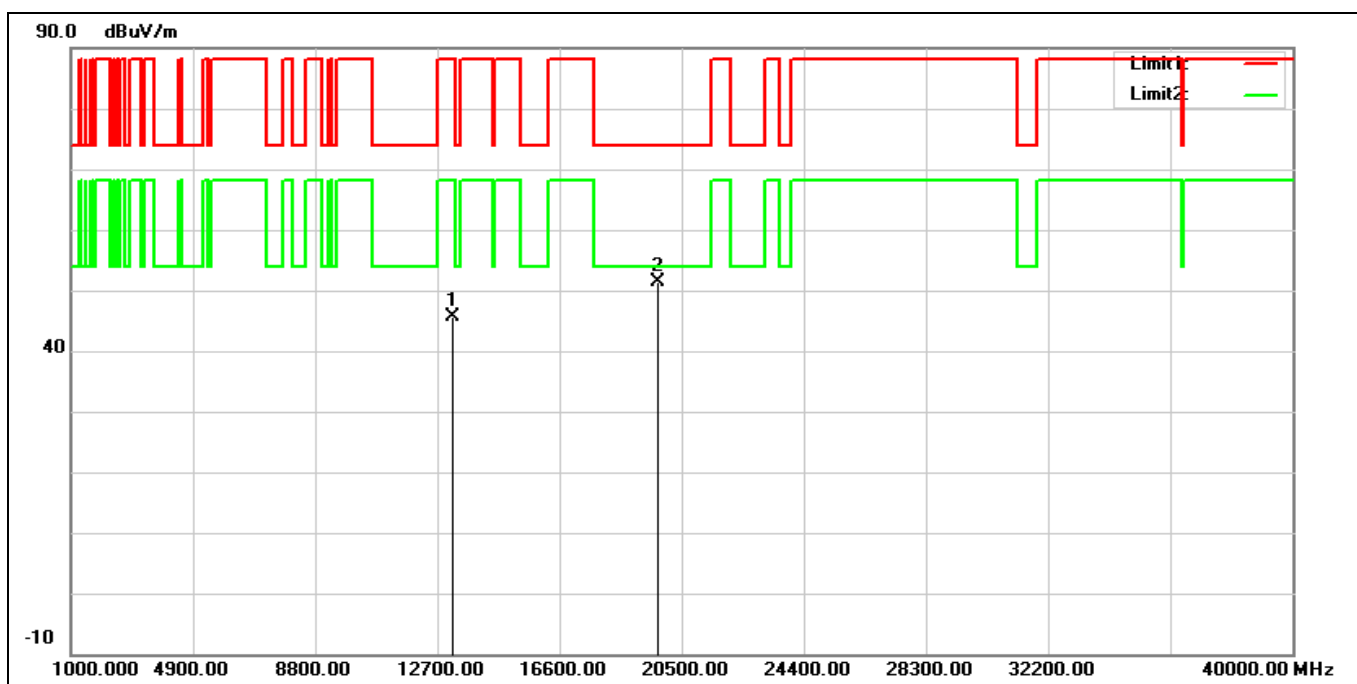


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	30.35	15.38	45.73	88.20	-42.47	peak
2*	19755.000	30.35	20.96	51.31	74.00	-22.69	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

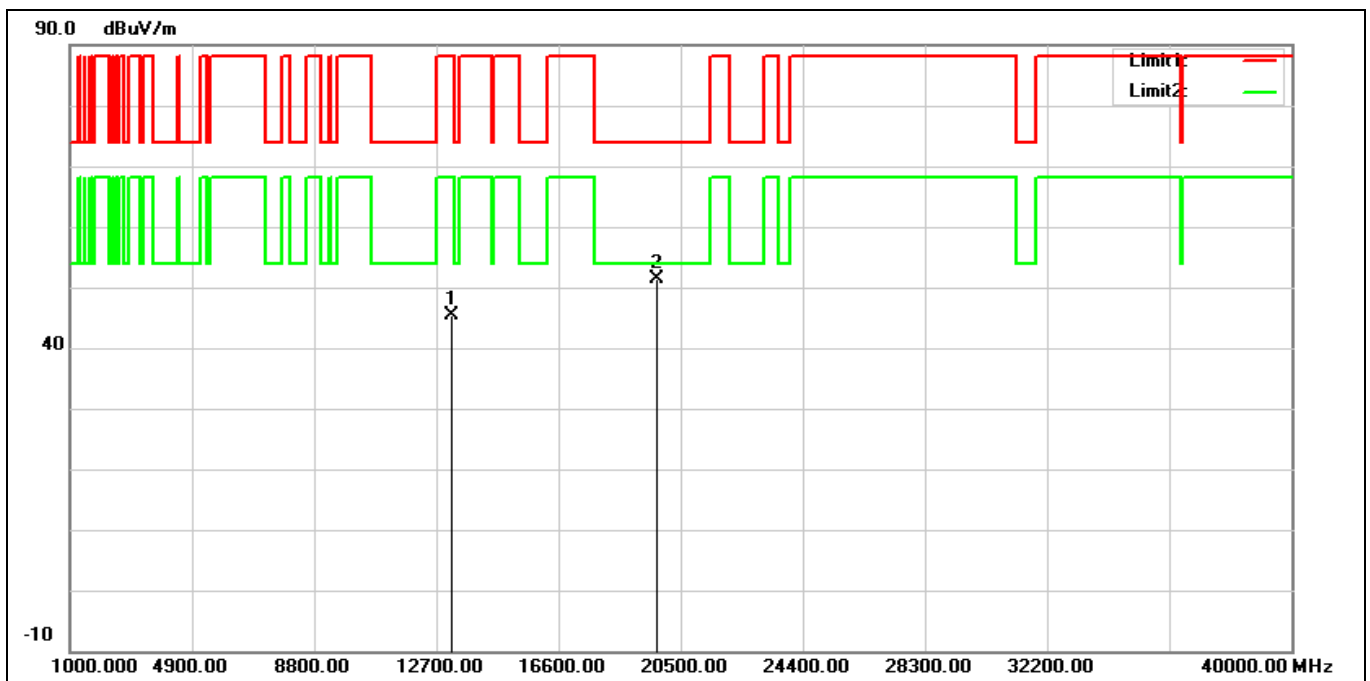


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	29.98	15.38	45.36	88.20	-42.84	peak
2*	19755.000	30.47	20.96	51.43	74.00	-22.57	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT320 6745 MHz
Remark:

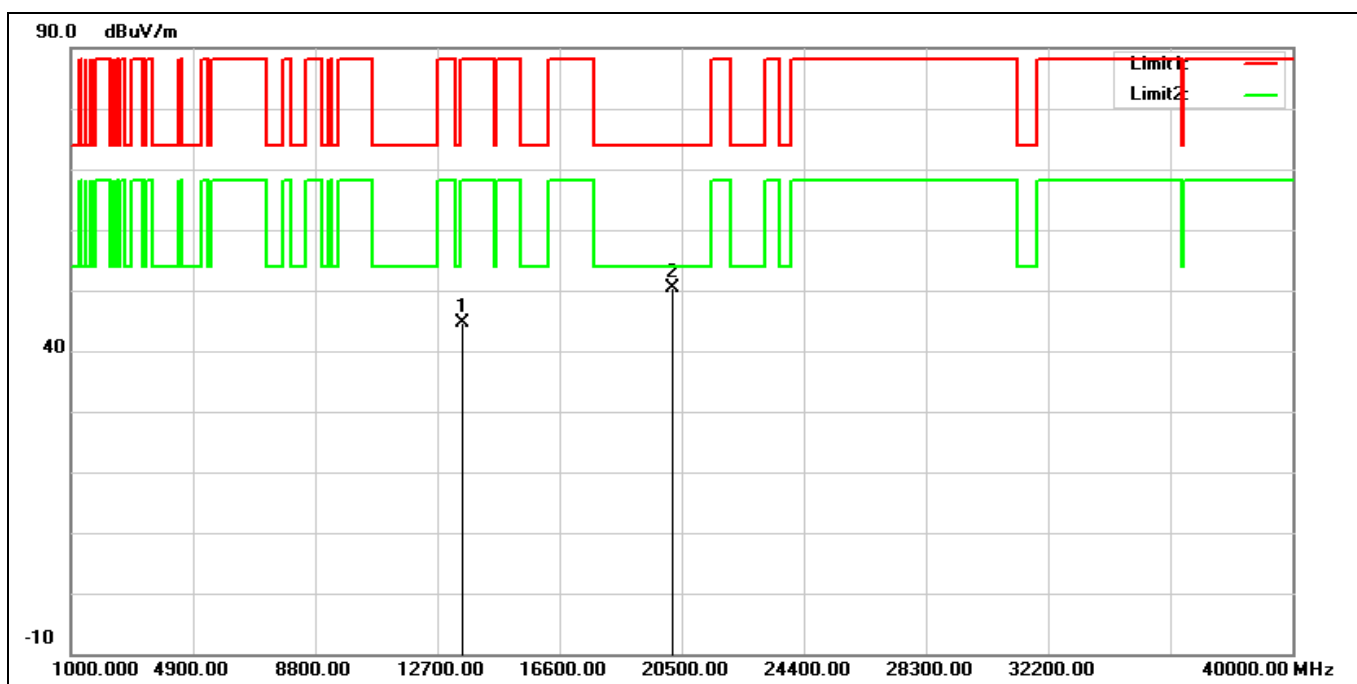


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	30.13	14.48	44.61	88.20	-43.59	peak
2*	20235.000	29.90	20.52	50.42	74.00	-23.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6745 MHz		
Remark:			

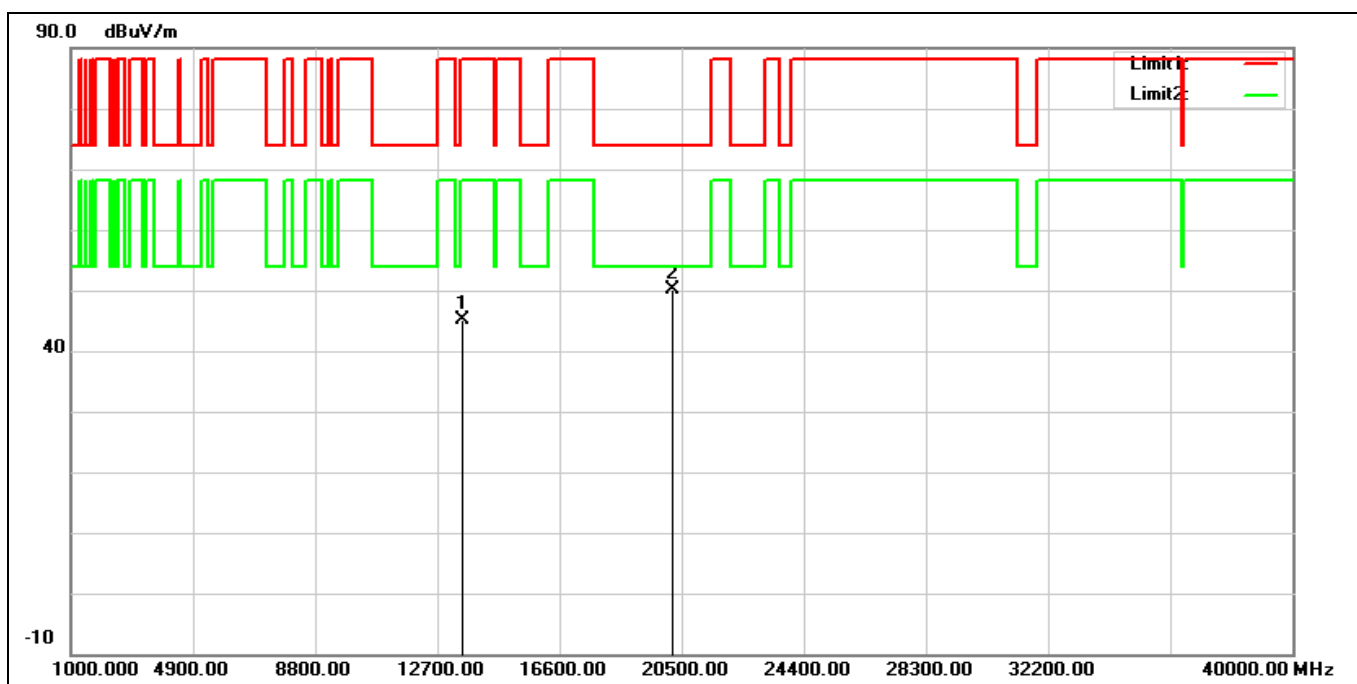


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	30.56	14.48	45.04	88.20	-43.16	peak
2*	20235.000	29.61	20.52	50.13	74.00	-23.87	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

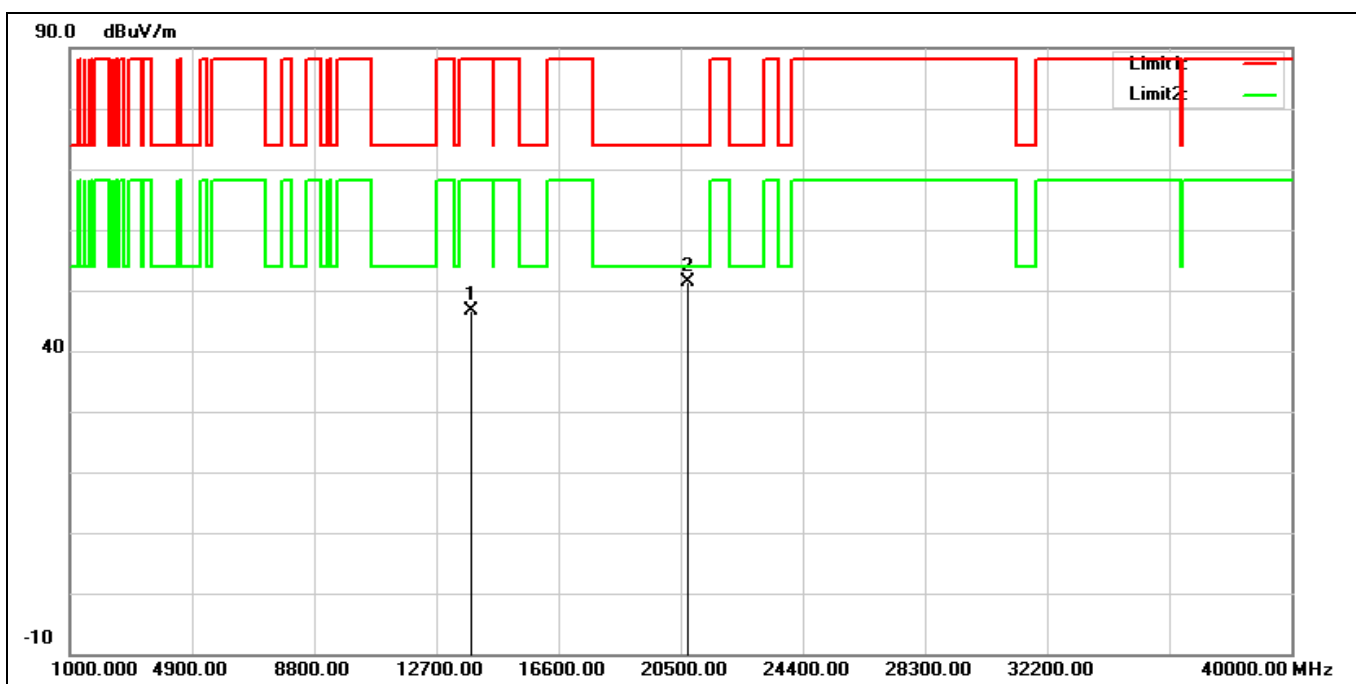


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	30.35	16.38	46.73	88.20	-41.47	peak
2*	20715.000	31.00	20.30	51.30	74.00	-22.70	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

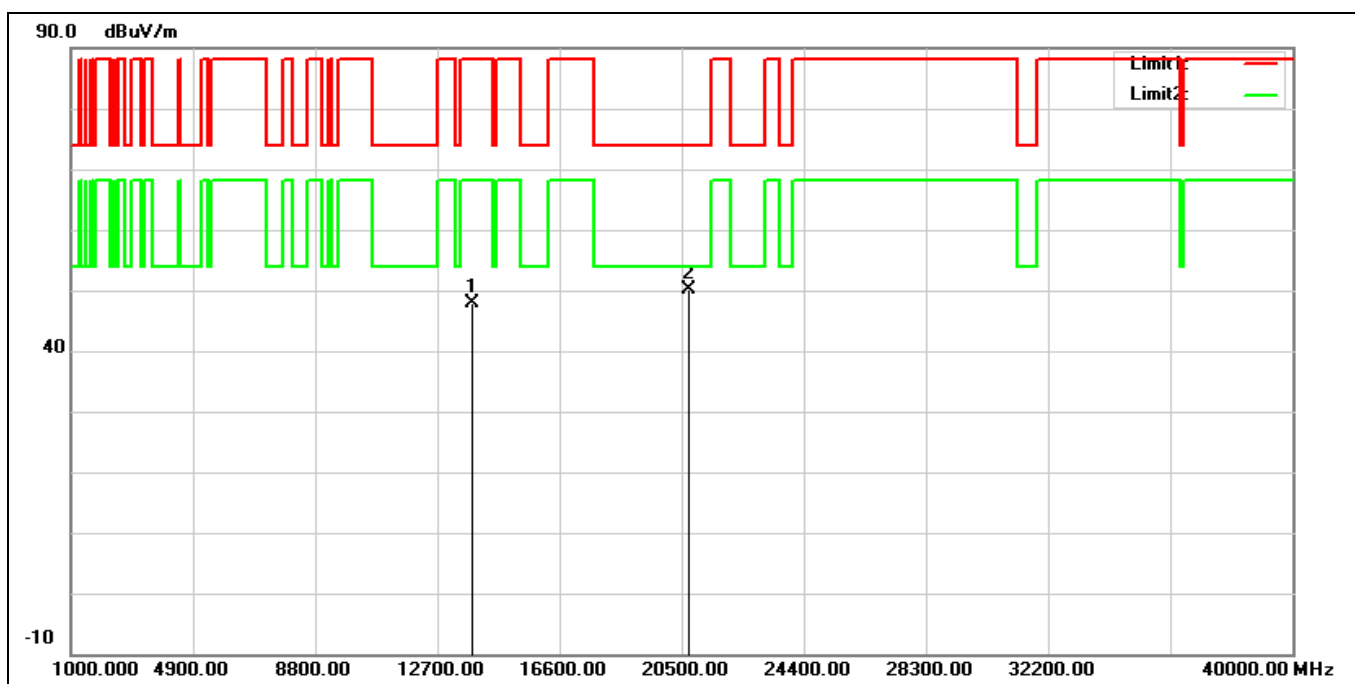


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	31.46	16.38	47.84	88.20	-40.36	peak
2*	20715.000	29.82	20.30	50.12	74.00	-23.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

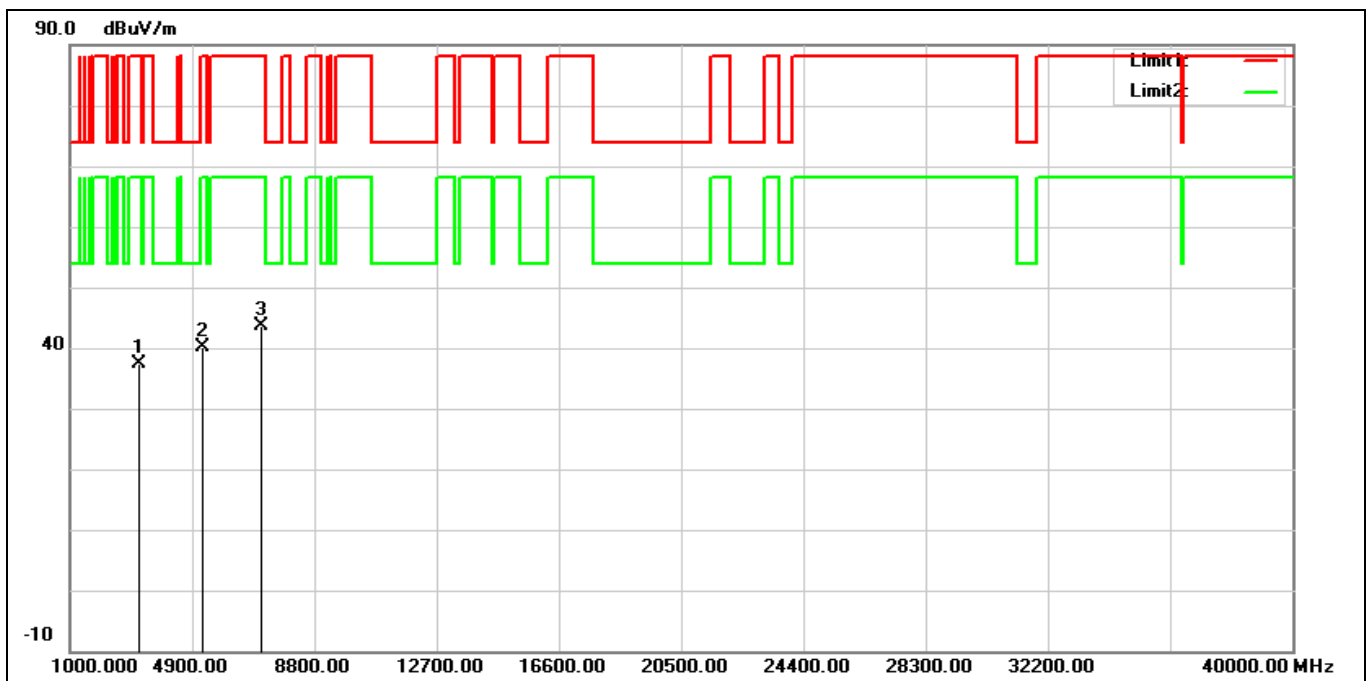

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3159.000	41.56	-4.16	37.40	88.20	-50.80	peak
2	5182.000	39.02	1.23	40.25	88.20	-47.95	peak
3*	7103.000	36.95	6.63	43.58	88.20	-44.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	WLAN 2.4 GHz + 5 GHz+ 6 GHz + Bluetooth LE		
Remark:			

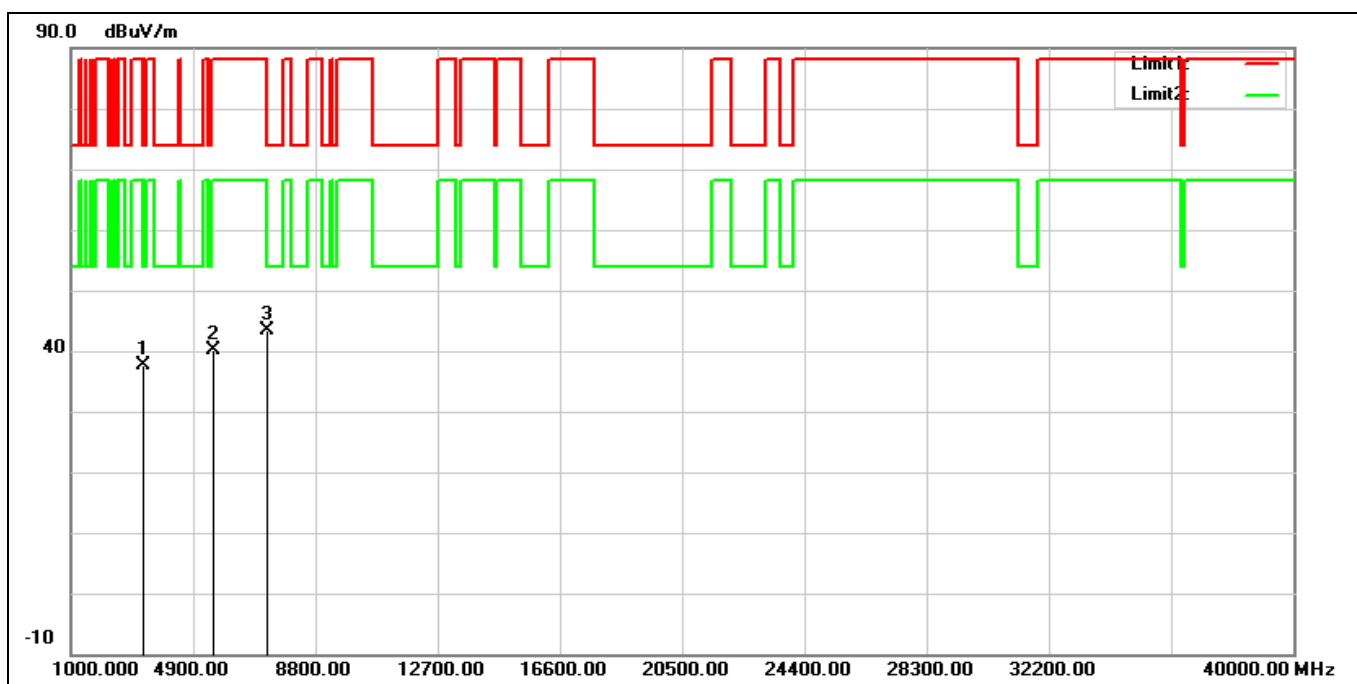


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3278.000	42.06	-4.48	37.58	88.20	-50.62	peak
2	5505.000	38.40	1.79	40.19	88.20	-48.01	peak
3*	7239.000	36.27	7.15	43.42	88.20	-44.78	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

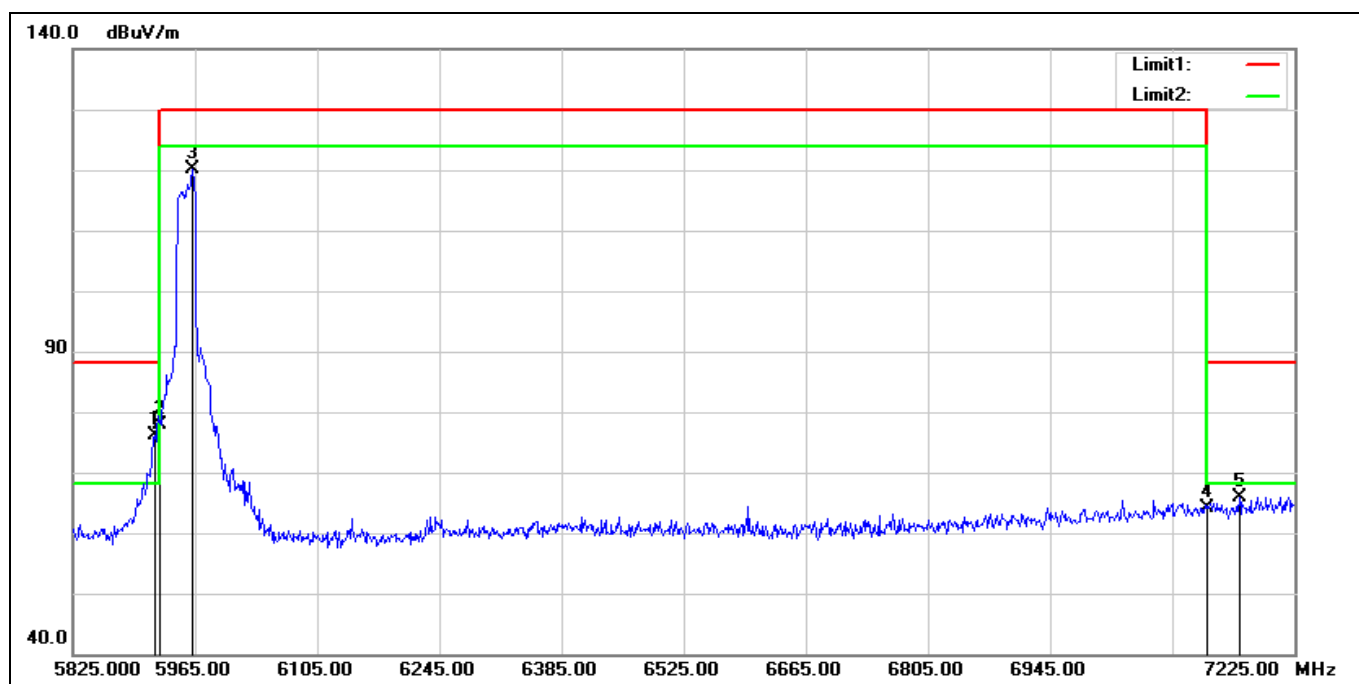


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	73.94	2.26	76.20	88.20	-12.00	peak
2	5925.000	75.67	2.23	77.90	88.20	-10.30	peak
3*	5962.200	118.01	2.08	120.09	130.00	-9.91	peak
4	7125.000	57.49	6.69	64.18	88.20	-24.02	peak
5	7162.000	59.16	6.83	65.99	88.20	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

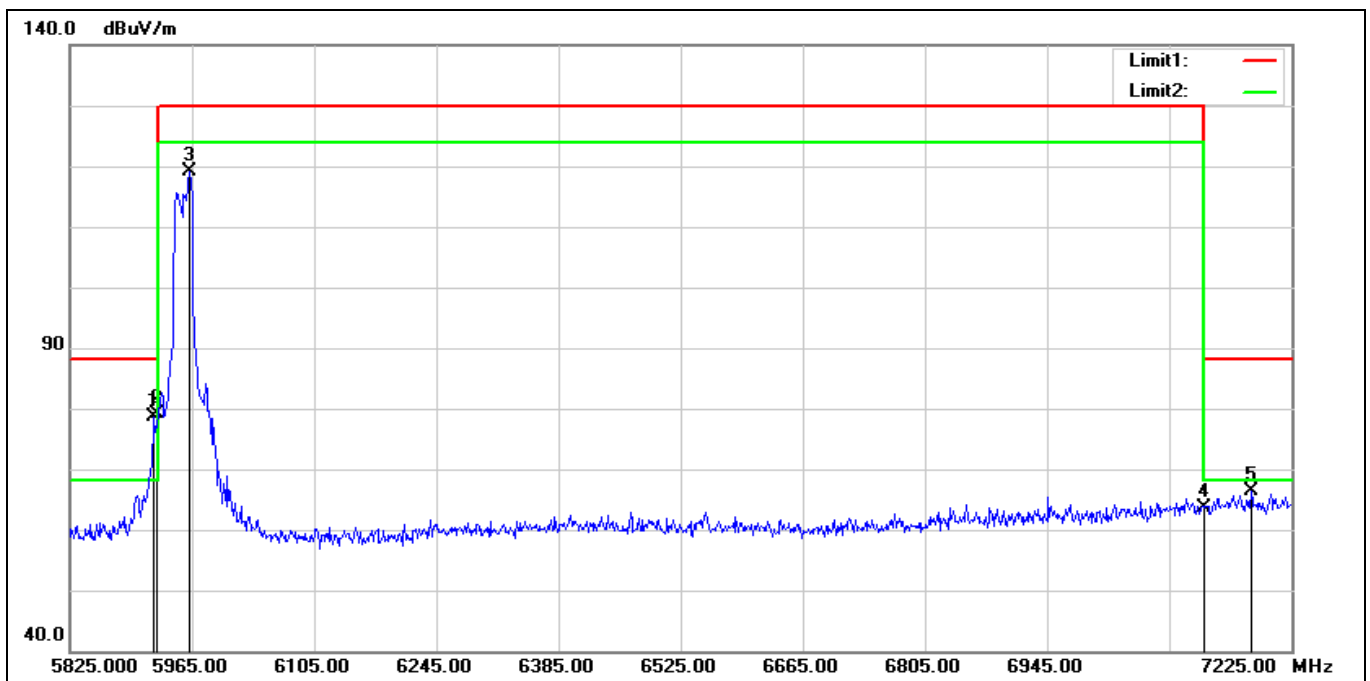


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	76.49	2.24	78.73	88.20	-9.47	peak
2*	5925.000	76.88	2.23	79.11	88.20	-9.09	peak
3	5962.200	117.05	2.08	119.13	130.00	-10.87	peak
4	7125.000	56.99	6.69	63.68	88.20	-24.52	peak
5	7178.800	59.50	6.92	66.42	88.20	-21.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

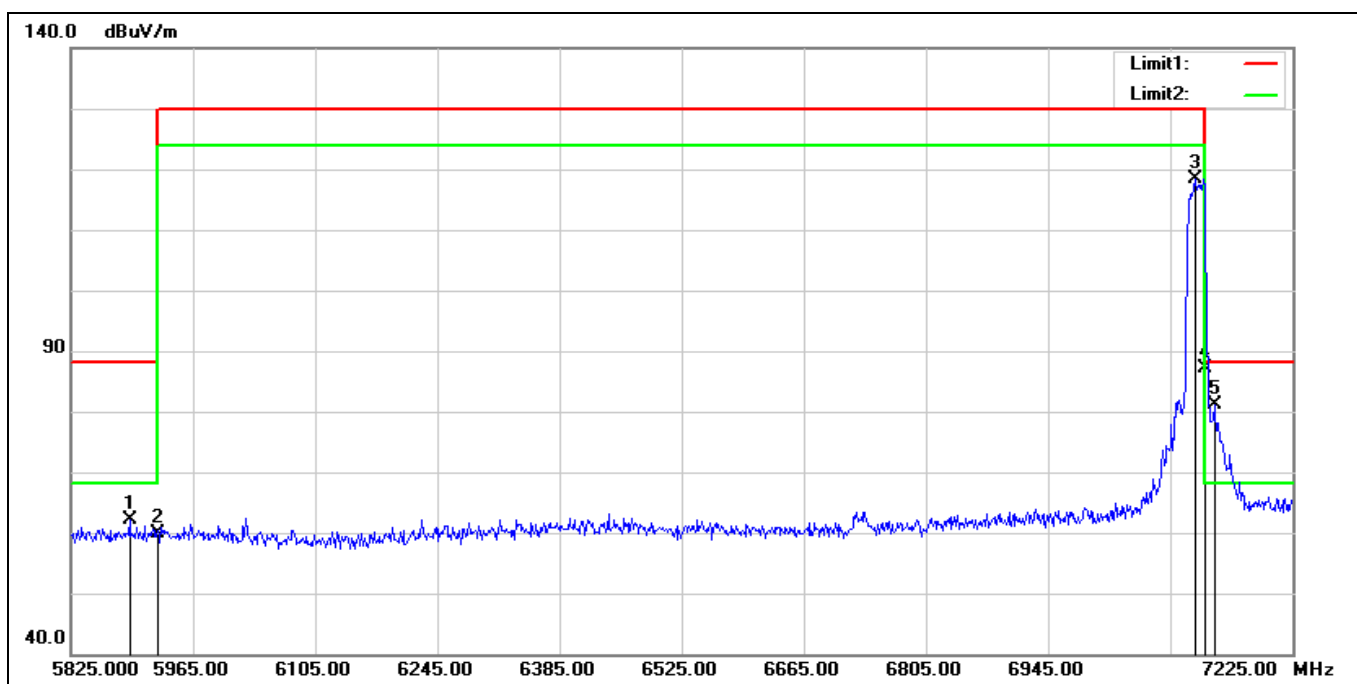


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5892.200	59.77	2.36	62.13	88.20	-26.07	peak
2	5925.000	57.71	2.23	59.94	88.20	-28.26	peak
3	7113.000	111.82	6.66	118.48	130.00	-11.52	peak
4*	7125.000	80.33	6.69	87.02	88.20	-1.18	peak
5	7135.400	74.29	6.73	81.02	88.20	-7.18	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

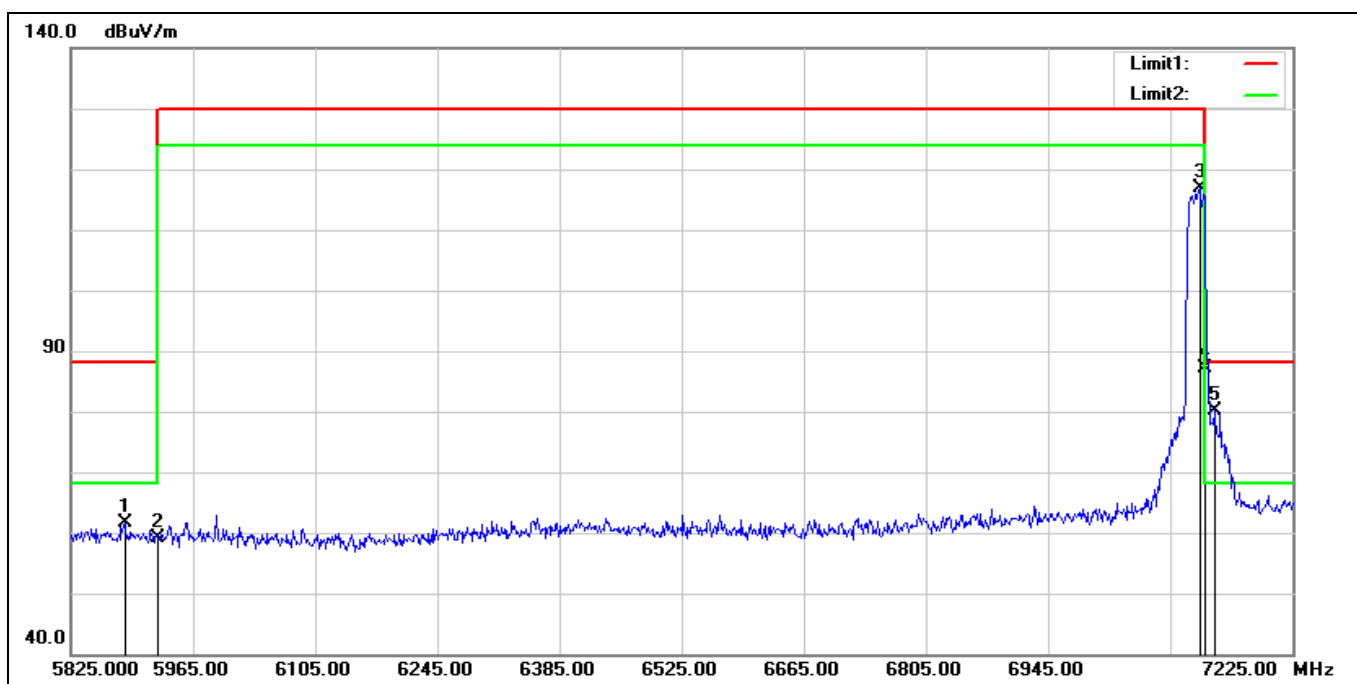


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5886.600	59.21	2.36	61.57	88.20	-26.63	peak
2	5925.000	56.84	2.23	59.07	88.20	-29.13	peak
3	7118.600	110.20	6.67	116.87	130.00	-13.13	peak
4*	7125.000	80.48	6.69	87.17	88.20	-1.03	peak
5	7135.400	73.42	6.73	80.15	88.20	-8.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

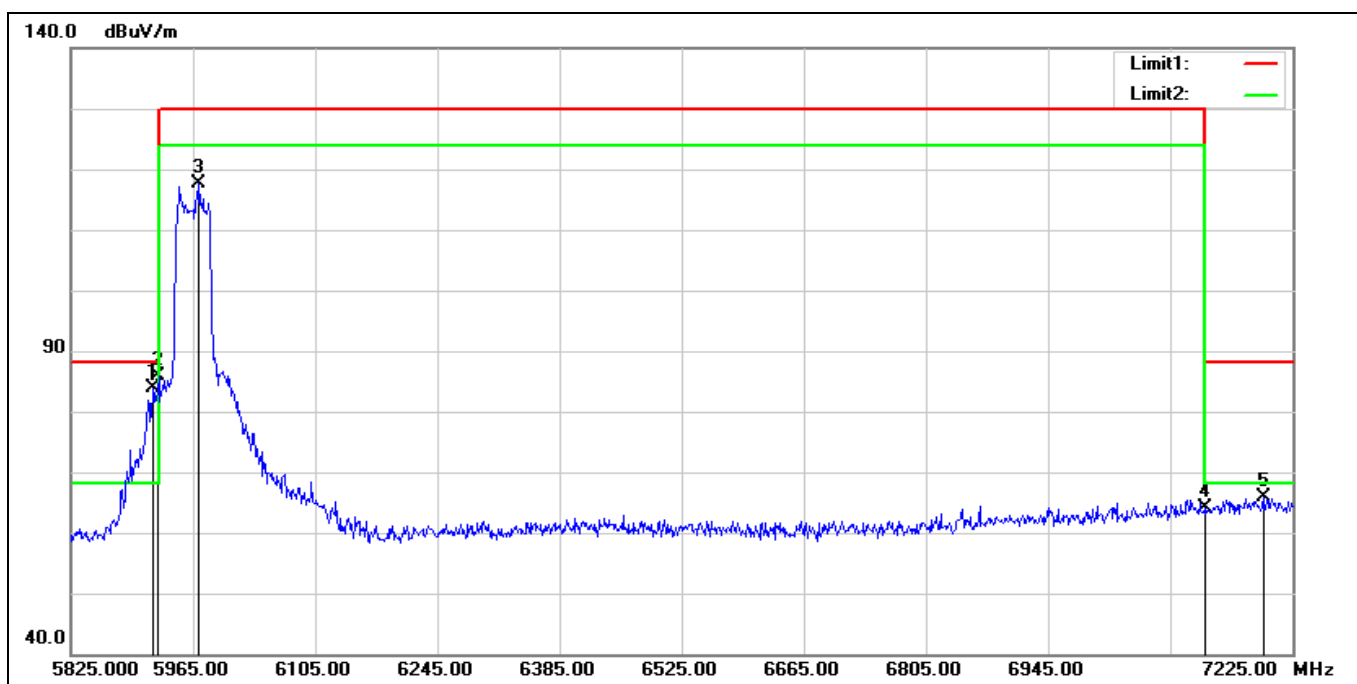


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	81.53	2.26	83.79	88.20	-4.41	peak
2*	5925.000	83.56	2.23	85.79	88.20	-2.41	peak
3	5972.000	115.57	2.10	117.67	130.00	-12.33	peak
4	7125.000	57.35	6.69	64.04	88.20	-24.16	peak
5	7191.400	58.85	6.99	65.84	88.20	-22.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

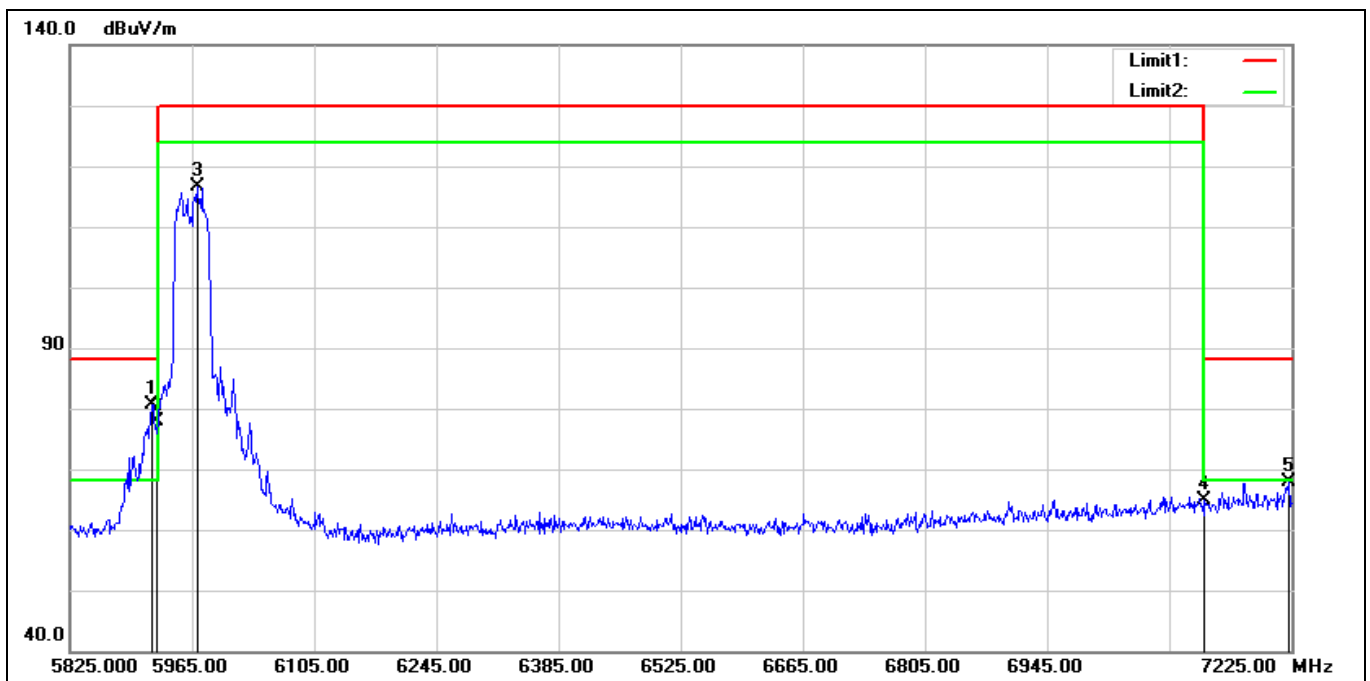


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	78.29	2.26	80.55	88.20	-7.65	peak
2	5925.000	75.69	2.23	77.92	88.20	-10.28	peak
3	5970.600	114.62	2.10	116.72	130.00	-13.28	peak
4	7125.000	58.17	6.69	64.86	88.20	-23.34	peak
5	7222.200	60.72	7.09	67.81	88.20	-20.39	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

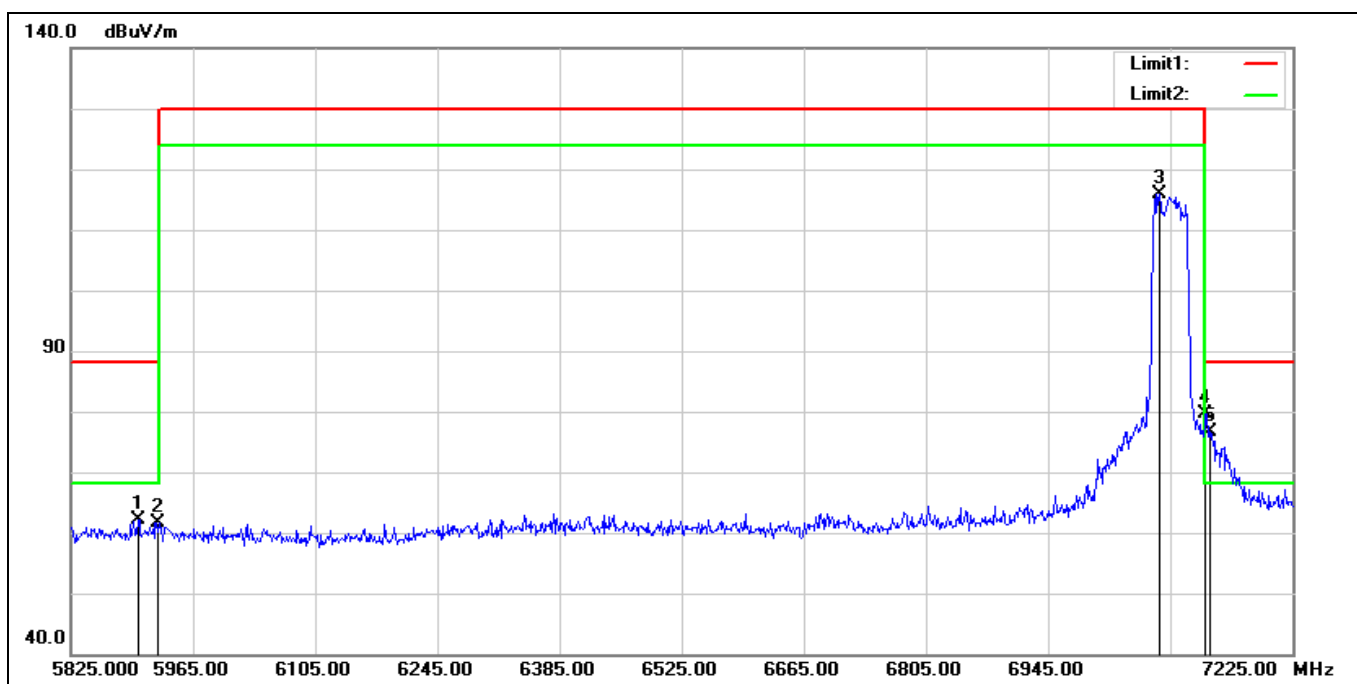


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5902.000	59.77	2.37	62.14	88.20	-26.06	peak
2	5925.000	59.30	2.23	61.53	88.20	-26.67	peak
3	7072.400	109.50	6.36	115.86	130.00	-14.14	peak
4*	7125.000	72.99	6.69	79.68	88.20	-8.52	peak
5	7131.200	69.96	6.71	76.67	88.20	-11.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

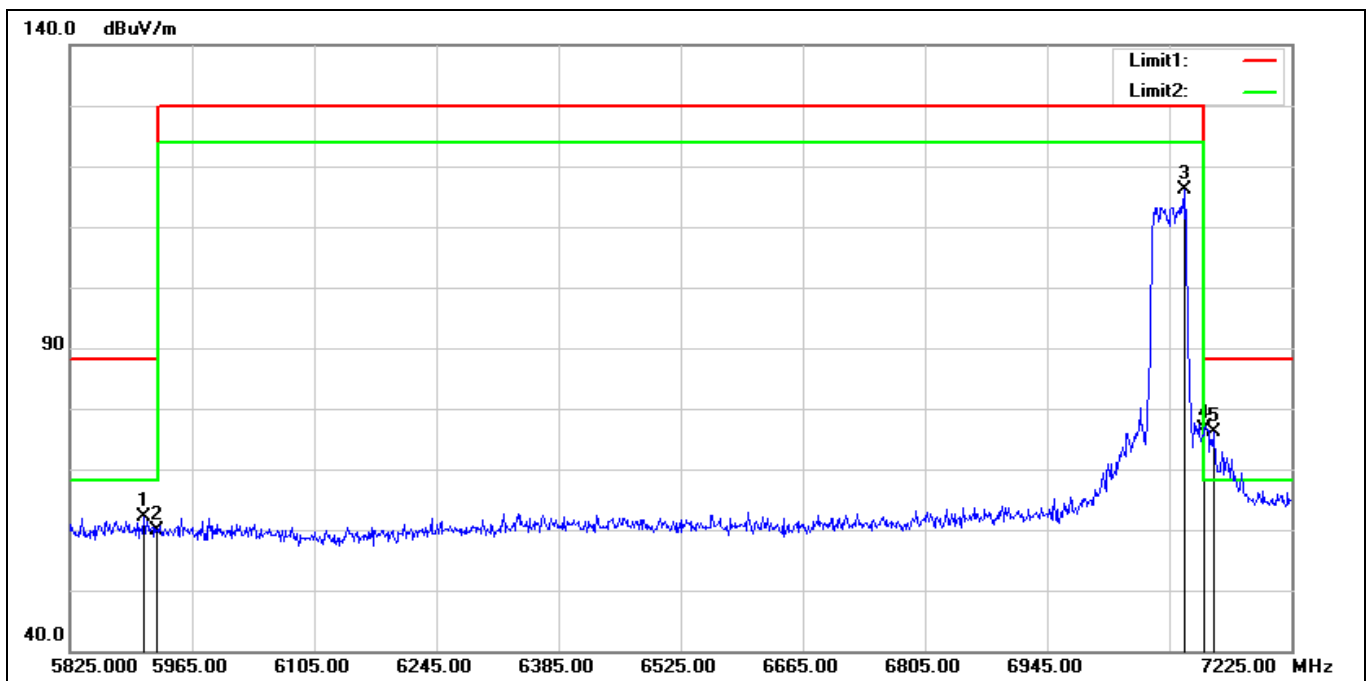


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5909.000	59.80	2.32	62.12	88.20	-26.08	peak
2	5925.000	57.69	2.23	59.92	88.20	-28.28	peak
3	7103.200	109.40	6.63	116.03	130.00	-13.97	peak
4*	7125.000	69.90	6.69	76.59	88.20	-11.61	peak
5	7135.400	69.30	6.73	76.03	88.20	-12.17	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT80 5985 MHz
Remark:

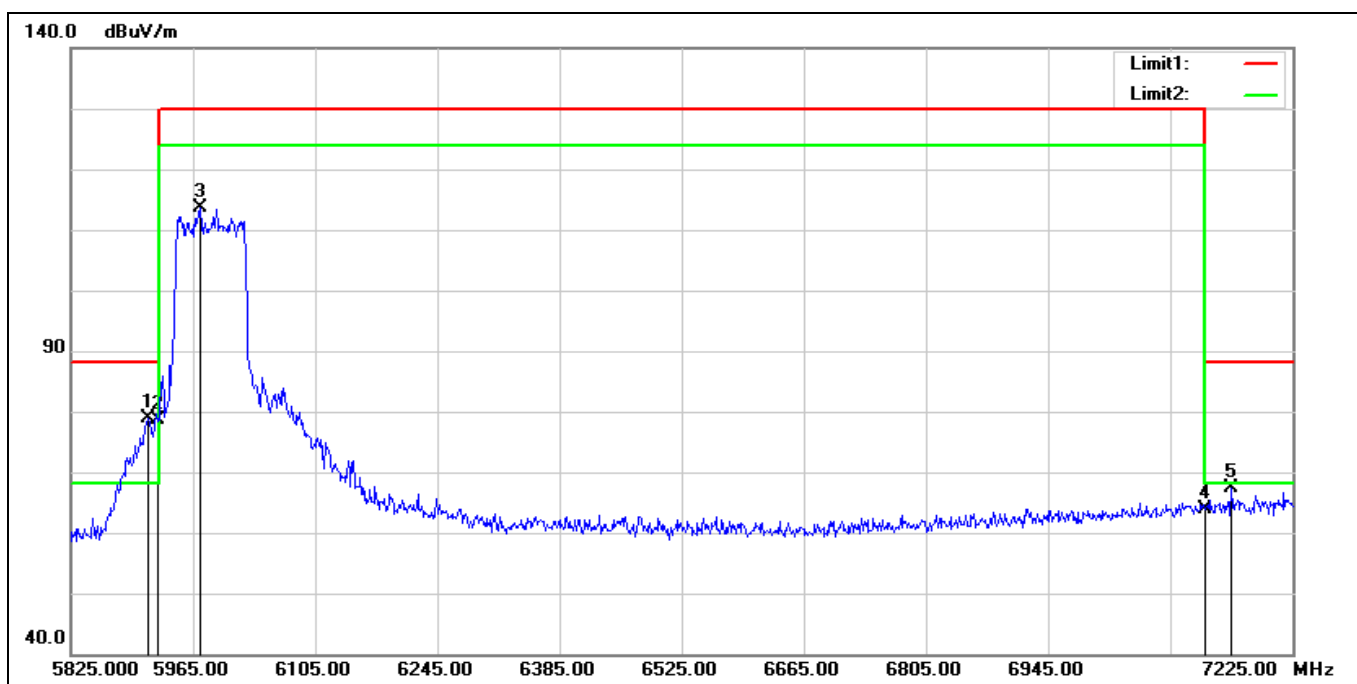


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5913.200	76.57	2.30	78.87	88.20	-9.33	peak
2	5925.000	76.39	2.23	78.62	88.20	-9.58	peak
3	5973.400	111.44	2.11	113.55	130.00	-16.45	peak
4	7125.000	57.14	6.69	63.83	88.20	-24.37	peak
5	7155.000	60.54	6.80	67.34	88.20	-20.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

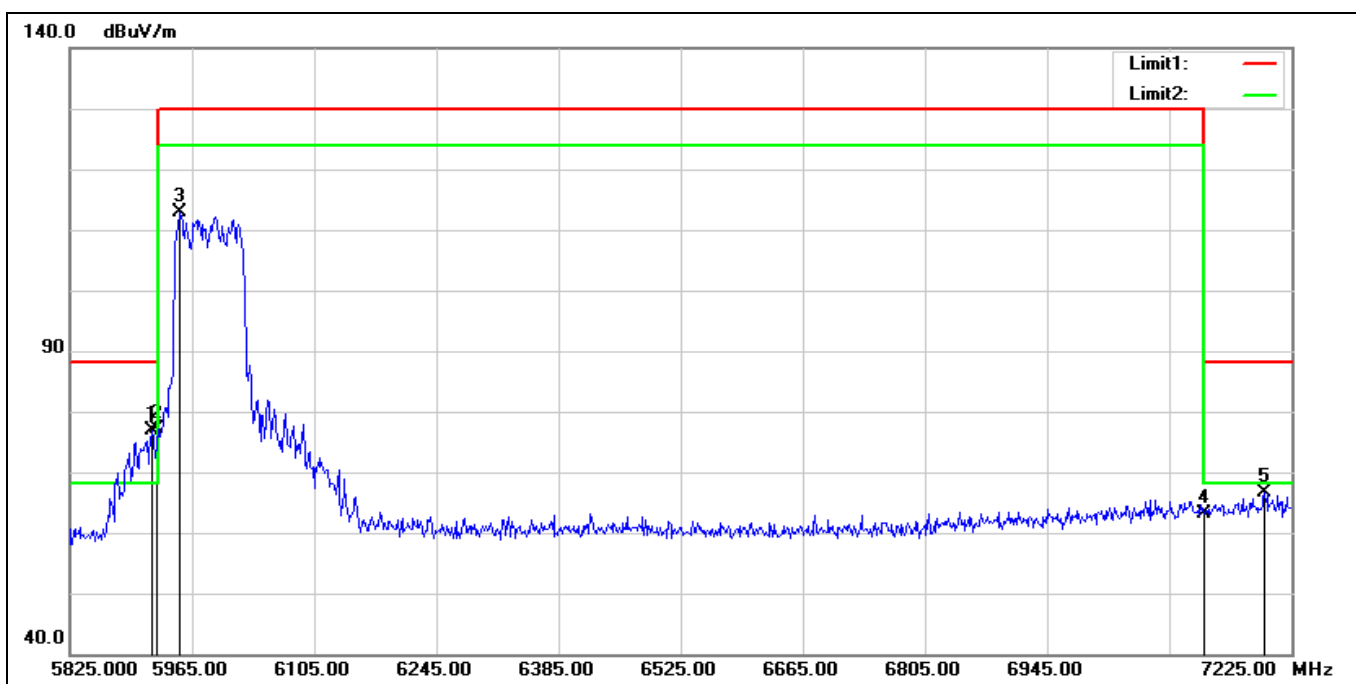


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	74.54	2.26	76.80	88.20	-11.40	peak
2*	5925.000	75.01	2.23	77.24	88.20	-10.96	peak
3	5951.000	110.83	2.06	112.89	130.00	-17.11	peak
4	7125.000	56.54	6.69	63.23	88.20	-24.97	peak
5	7194.200	59.67	7.00	66.67	88.20	-21.53	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

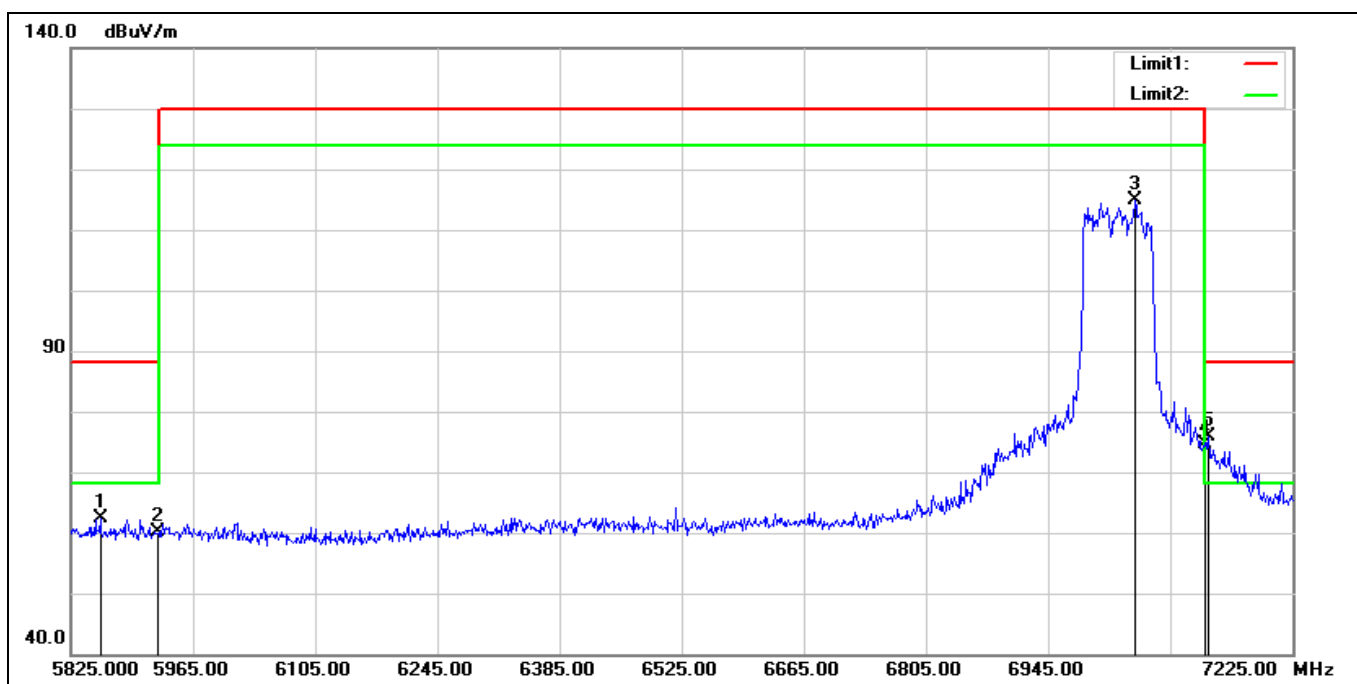


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5858.600	60.17	2.31	62.48	88.20	-25.72	peak
2	5925.000	57.97	2.23	60.20	88.20	-28.00	peak
3	7044.400	108.86	6.13	114.99	130.00	-15.01	peak
4	7125.000	67.99	6.69	74.68	88.20	-13.52	peak
5*	7128.400	69.17	6.70	75.87	88.20	-12.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

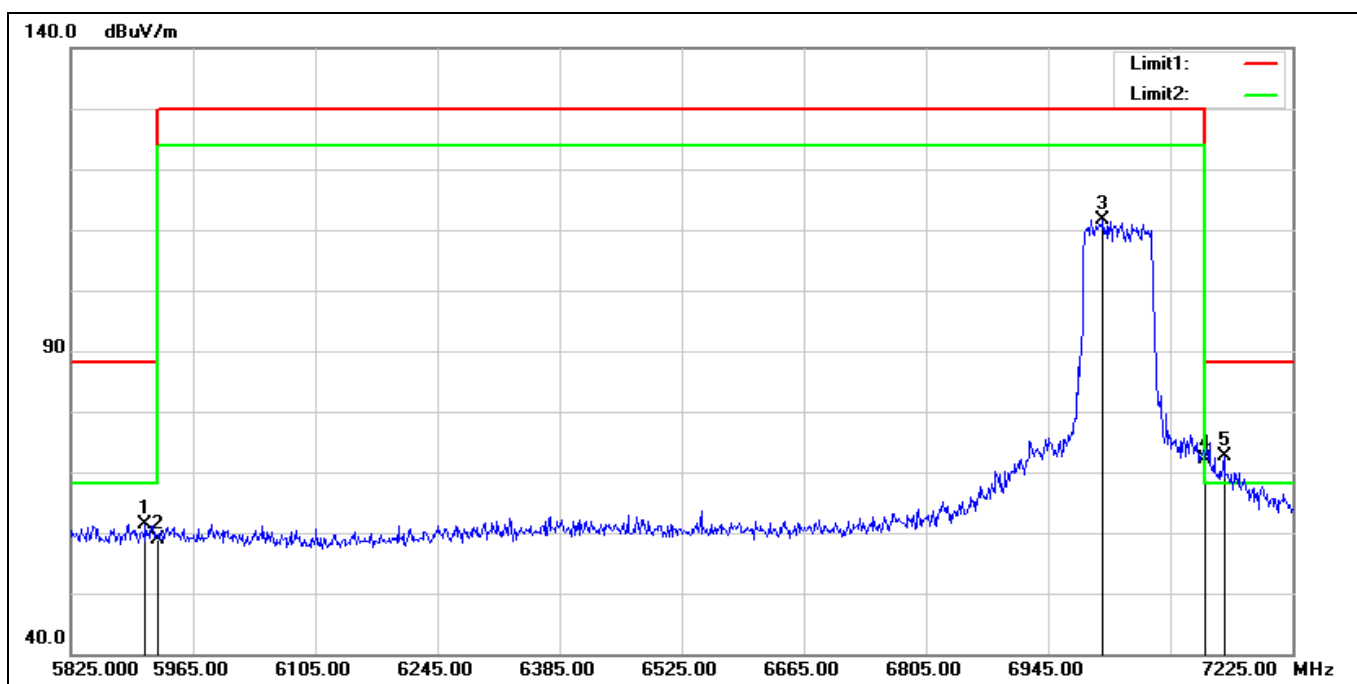


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5910.400	59.07	2.32	61.39	88.20	-26.81	peak
2	5925.000	56.61	2.23	58.84	88.20	-29.36	peak
3	7008.000	105.75	5.87	111.62	130.00	-18.38	peak
4	7125.000	65.45	6.69	72.14	88.20	-16.06	peak
5*	7146.600	65.84	6.76	72.60	88.20	-15.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

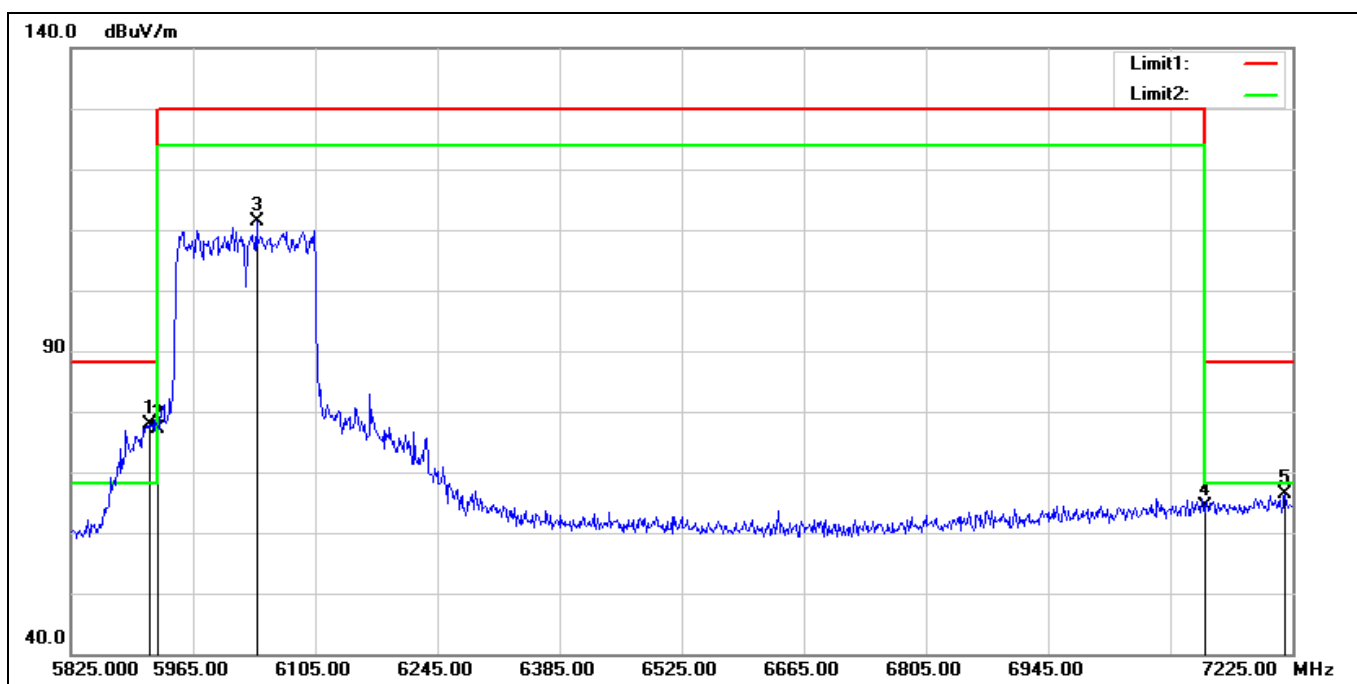


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5914.600	75.61	2.29	77.90	88.20	-10.30	peak
2	5925.000	74.81	2.23	77.04	88.20	-11.16	peak
3	6037.800	109.25	2.24	111.49	130.00	-18.51	peak
4	7125.000	57.73	6.69	64.42	88.20	-23.78	peak
5	7216.600	59.33	7.07	66.40	88.20	-21.80	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

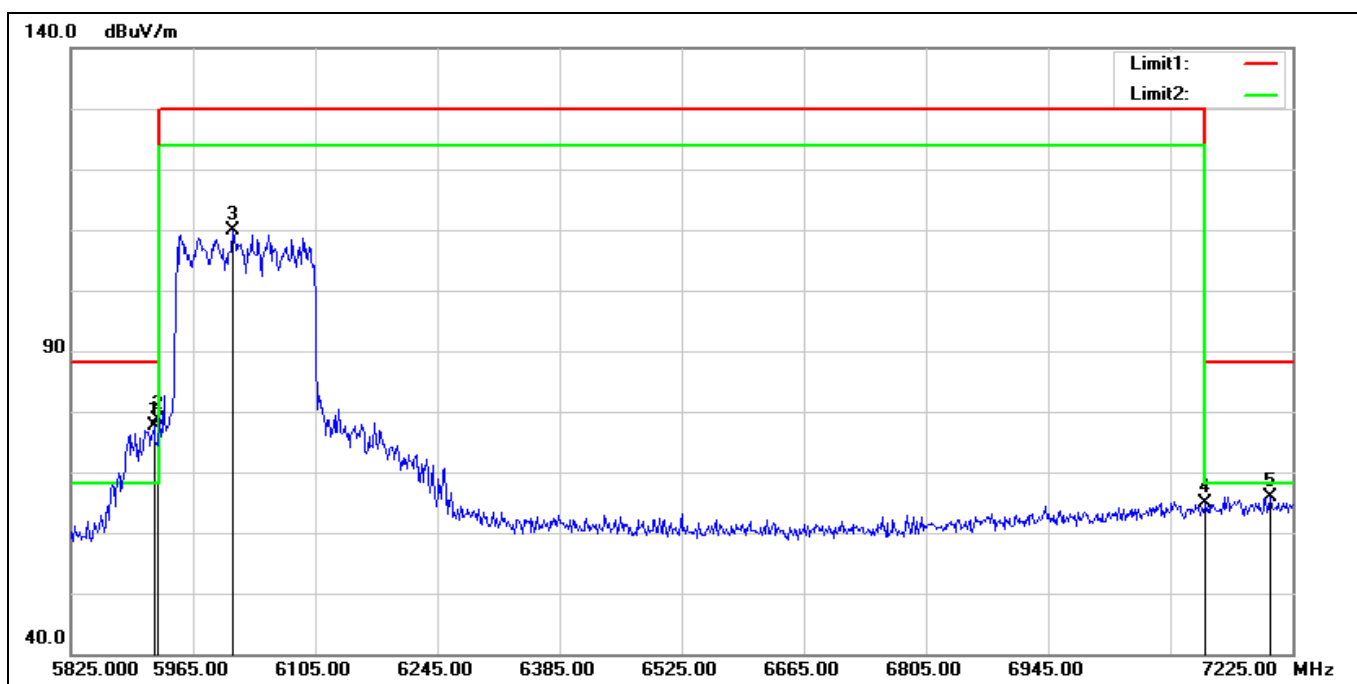


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5920.200	75.50	2.25	77.75	88.20	-10.45	peak
2*	5925.000	76.51	2.23	78.74	88.20	-9.46	peak
3	6009.800	107.63	2.17	109.80	130.00	-20.20	peak
4	7125.000	58.12	6.69	64.81	88.20	-23.39	peak
5	7199.800	58.96	7.03	65.99	88.20	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

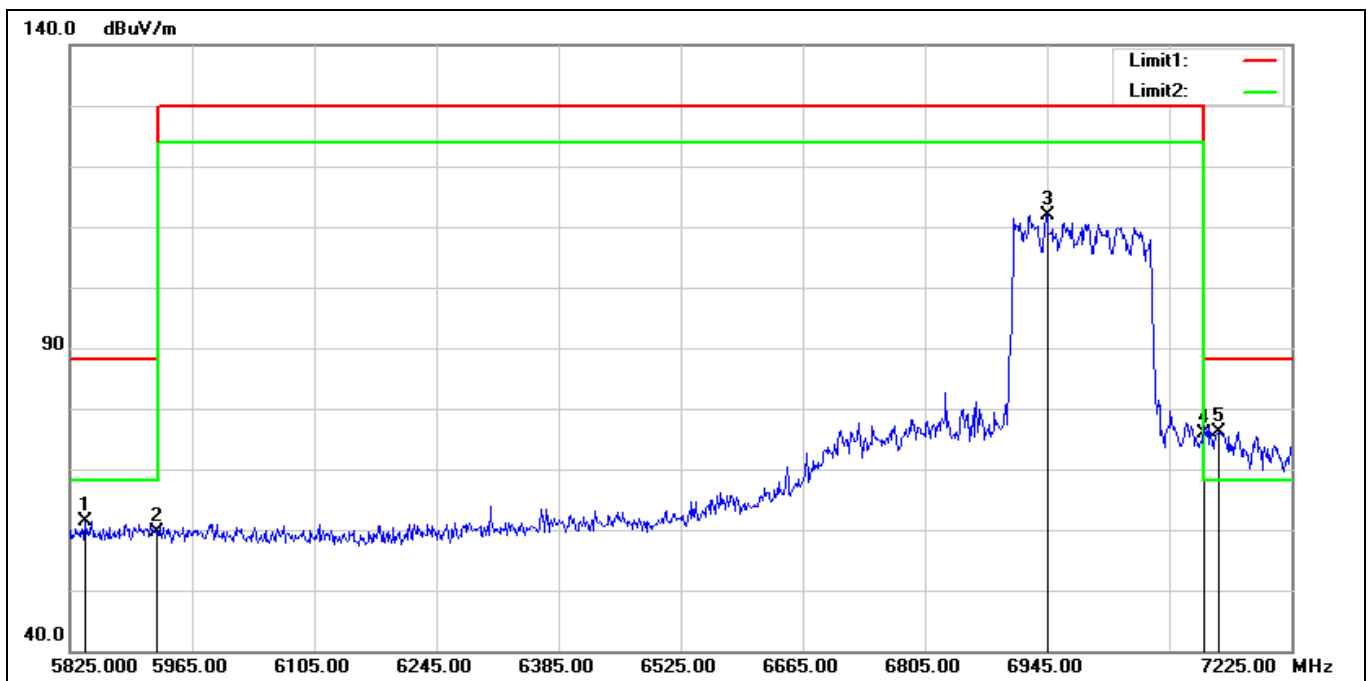


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5841.800	59.08	2.28	61.36	88.20	-26.84	peak
2	5925.000	57.50	2.23	59.73	88.20	-28.47	peak
3	6945.000	106.29	5.60	111.89	130.00	-18.11	peak
4	7125.000	69.12	6.69	75.81	88.20	-12.39	peak
5*	7142.400	69.37	6.75	76.12	88.20	-12.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

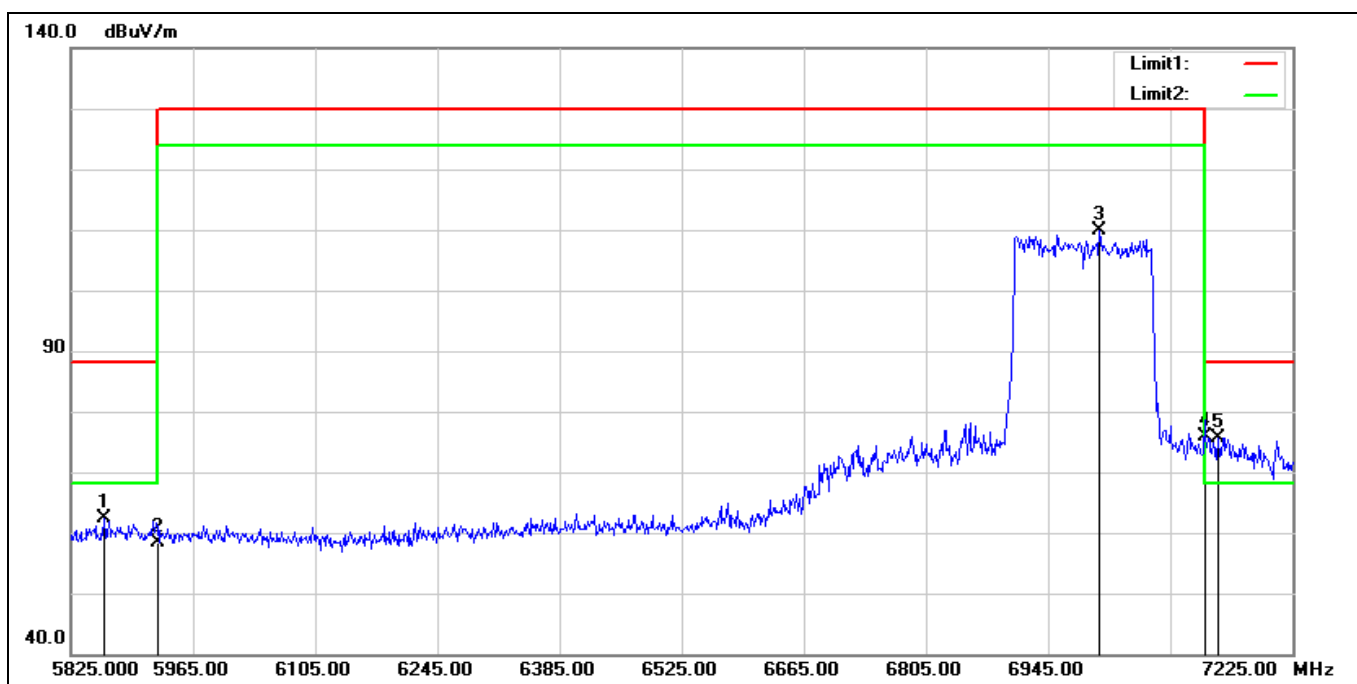


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5862.800	60.00	2.32	62.32	88.20	-25.88	peak
2	5925.000	56.11	2.23	58.34	88.20	-29.86	peak
3	7003.800	104.01	5.83	109.84	130.00	-20.16	peak
4*	7125.000	69.28	6.69	75.97	88.20	-12.23	peak
5	7139.600	68.98	6.74	75.72	88.20	-12.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

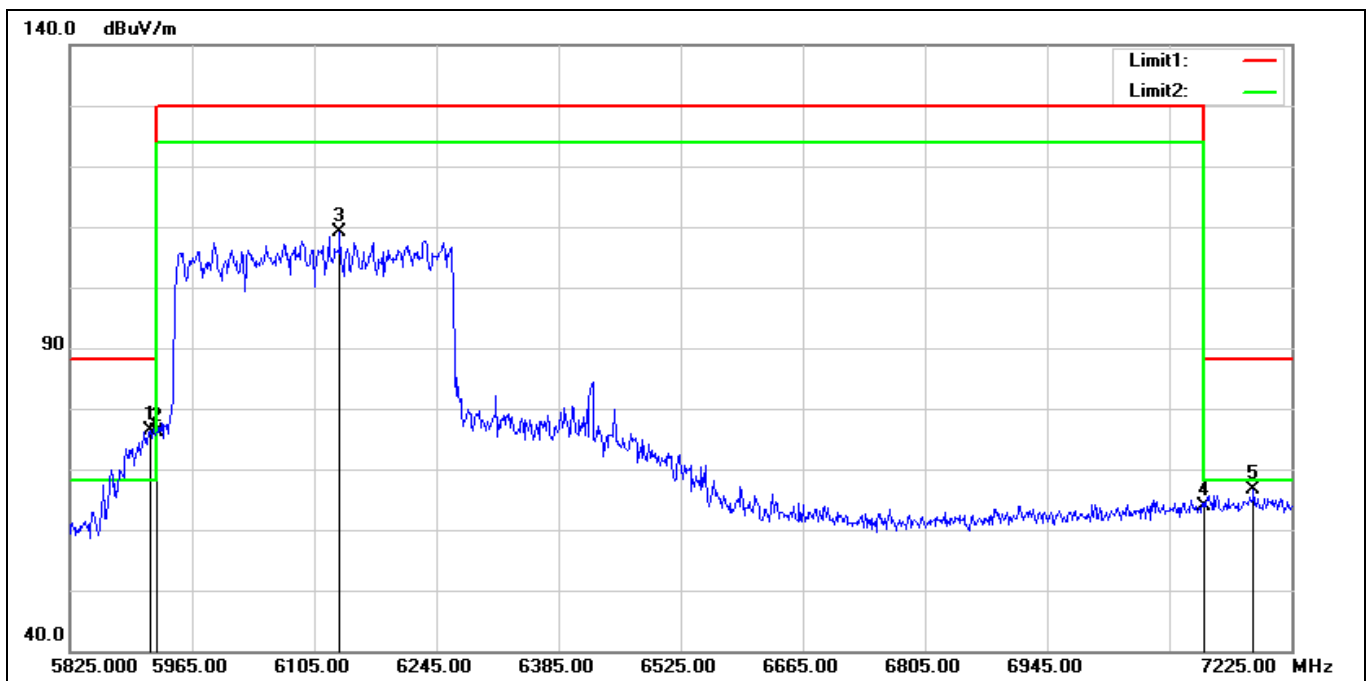


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5917.400	74.15	2.27	76.42	88.20	-11.78	peak
2	5925.000	73.94	2.23	76.17	88.20	-12.03	peak
3	6134.400	106.67	2.53	109.20	130.00	-20.80	peak
4	7125.000	57.18	6.69	63.87	88.20	-24.33	peak
5	7181.600	59.65	6.93	66.58	88.20	-21.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

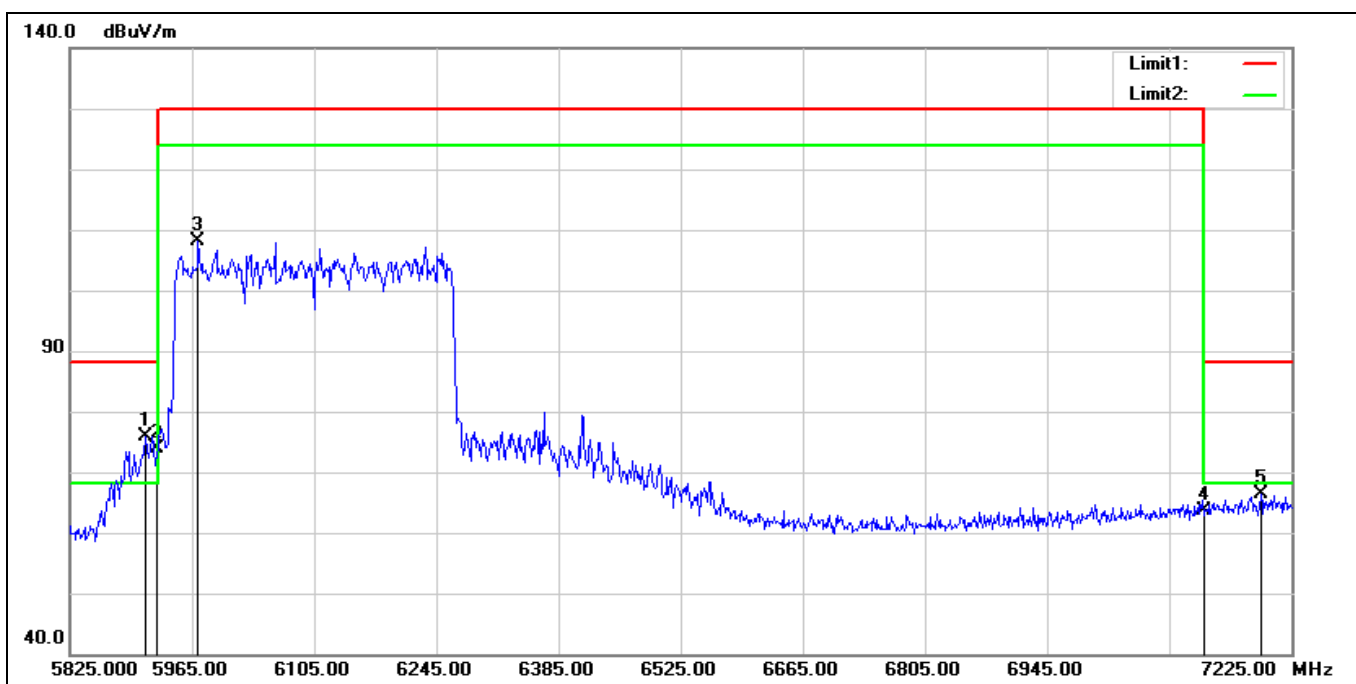


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5911.800	73.68	2.31	75.99	88.20	-12.21	peak
2	5925.000	71.66	2.23	73.89	88.20	-14.31	peak
3	5972.000	105.93	2.10	108.03	130.00	-21.97	peak
4	7125.000	56.96	6.69	63.65	88.20	-24.55	peak
5	7190.000	59.34	6.98	66.32	88.20	-21.88	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

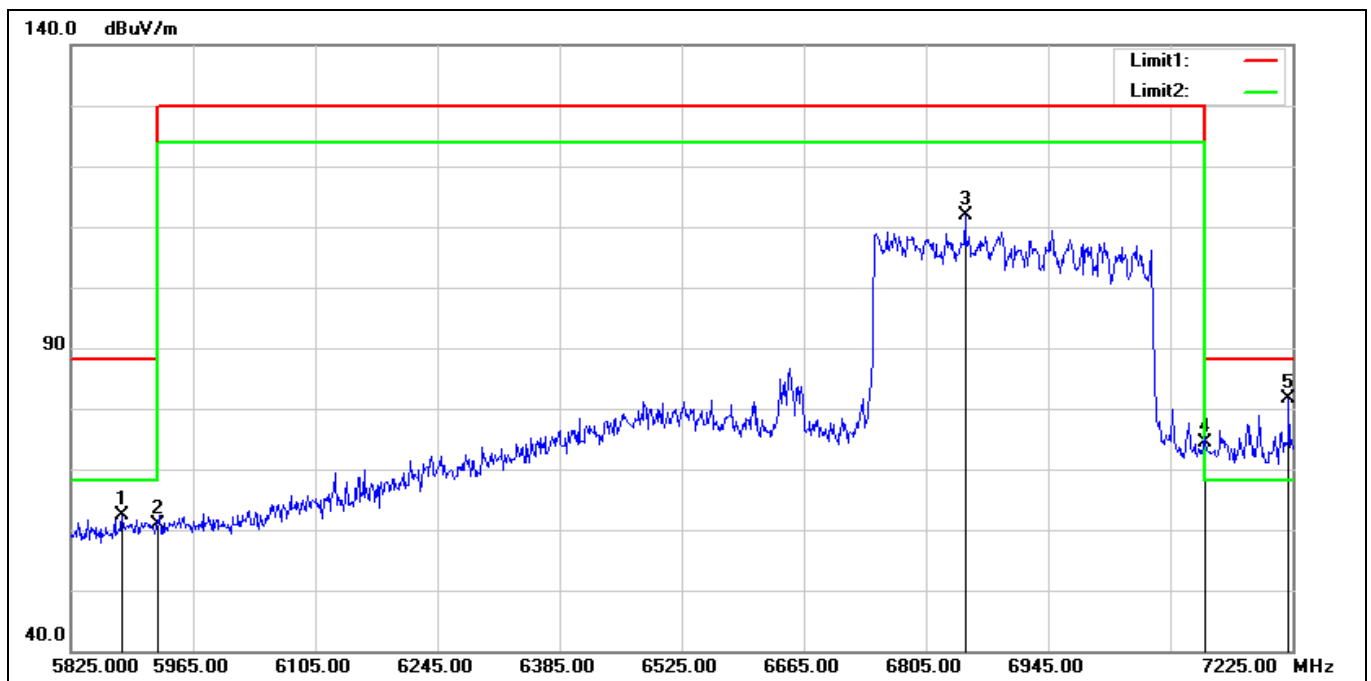

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5883.800	59.99	2.36	62.35	88.20	-25.85	peak
2	5925.000	58.65	2.23	60.88	88.20	-27.32	peak
3	6849.800	106.84	5.14	111.98	130.00	-18.02	peak
4	7125.000	67.76	6.69	74.45	88.20	-13.75	peak
5*	7220.800	74.67	7.08	81.75	88.20	-6.45	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

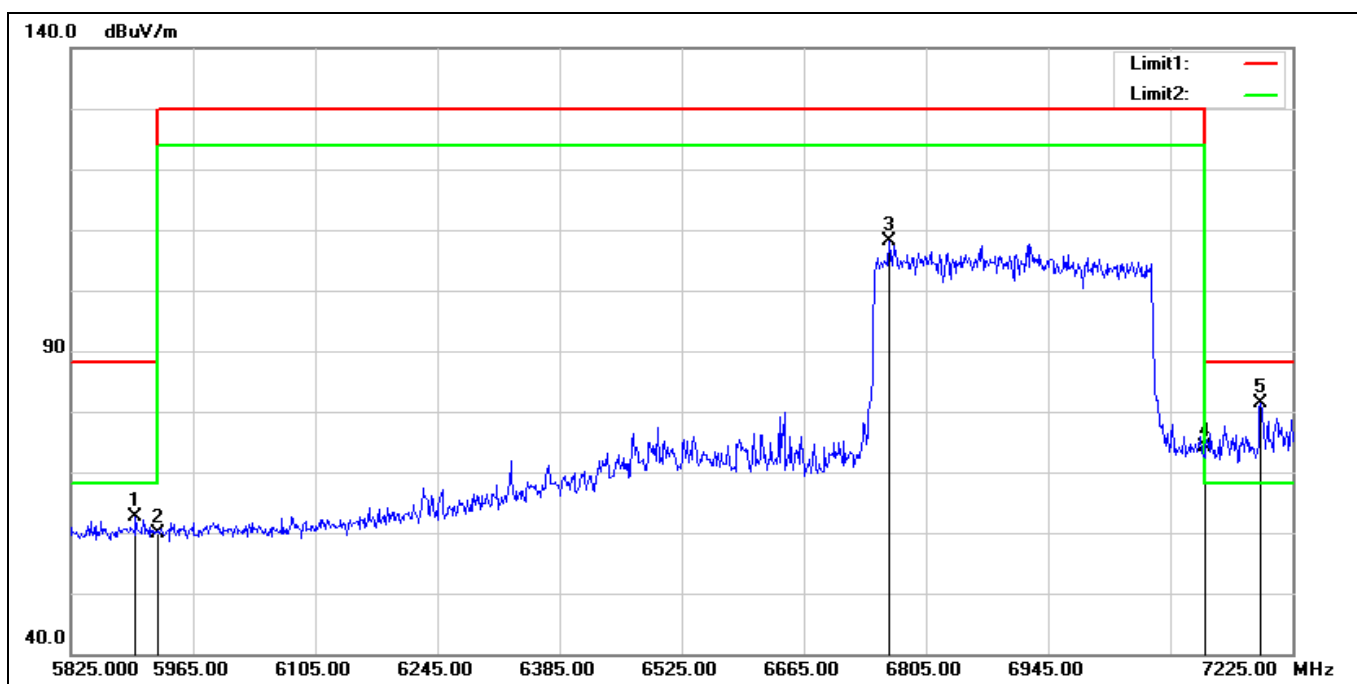

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5899.200	60.16	2.38	62.54	88.20	-25.66	peak
2	5925.000	57.68	2.23	59.91	88.20	-28.29	peak
3	6763.000	103.51	4.73	108.24	130.00	-21.76	peak
4	7125.000	67.51	6.69	74.20	88.20	-14.00	peak
5*	7188.600	74.34	6.97	81.31	88.20	-6.89	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5955 MHz
Remark:

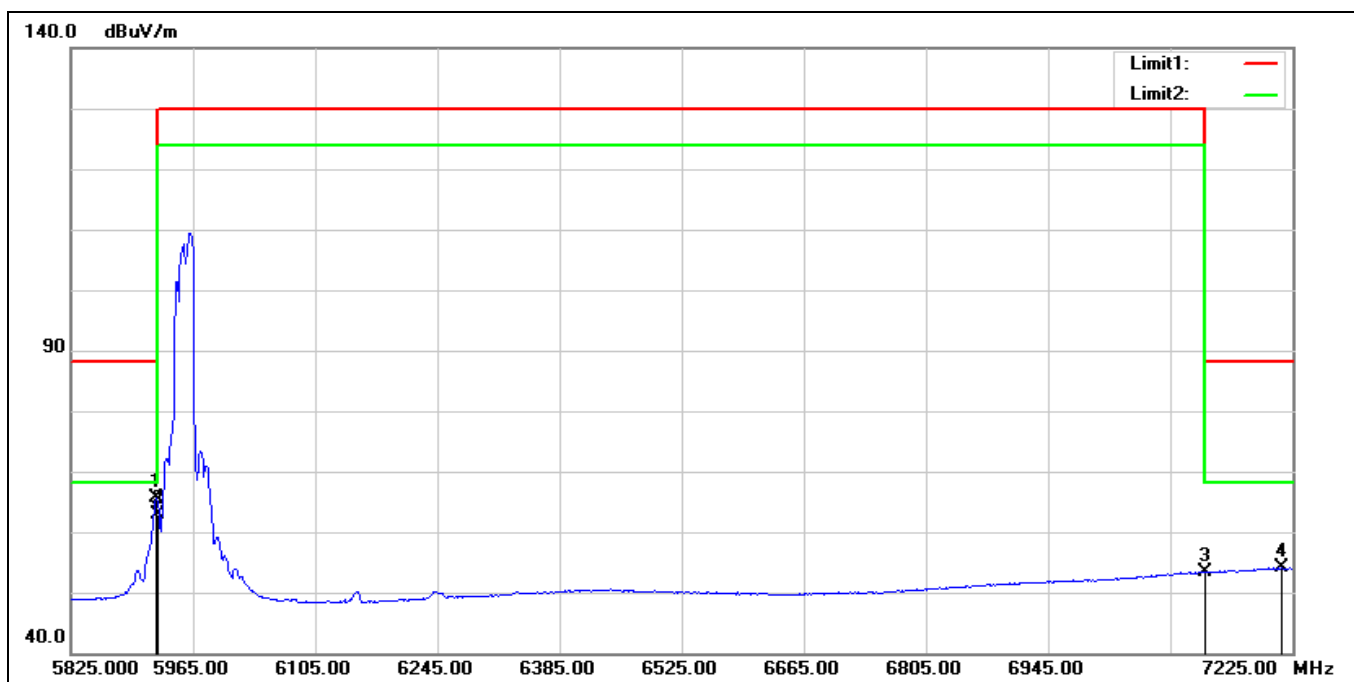


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5923.000	63.43	2.23	65.66	68.20	-2.54	AVG
2	5925.000	60.69	2.23	62.92	68.20	-5.28	AVG
3	7125.000	46.64	6.69	53.33	68.20	-14.87	AVG
4	7212.400	46.96	7.06	54.02	68.20	-14.18	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5955 MHz
Remark:

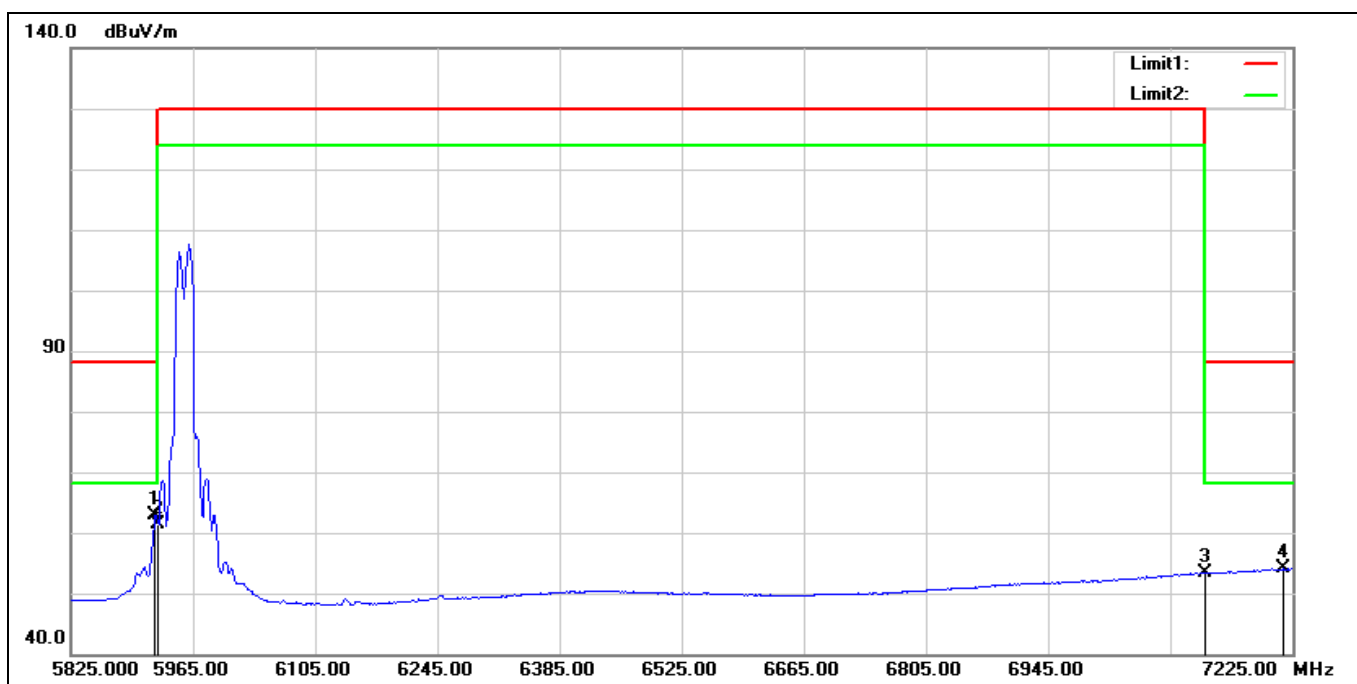


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5921.600	60.64	2.24	62.88	68.20	-5.32	AVG
2	5925.000	59.15	2.23	61.38	68.20	-6.82	AVG
3	7125.000	46.60	6.69	53.29	68.20	-14.91	AVG
4	7215.200	46.98	7.07	54.05	68.20	-14.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

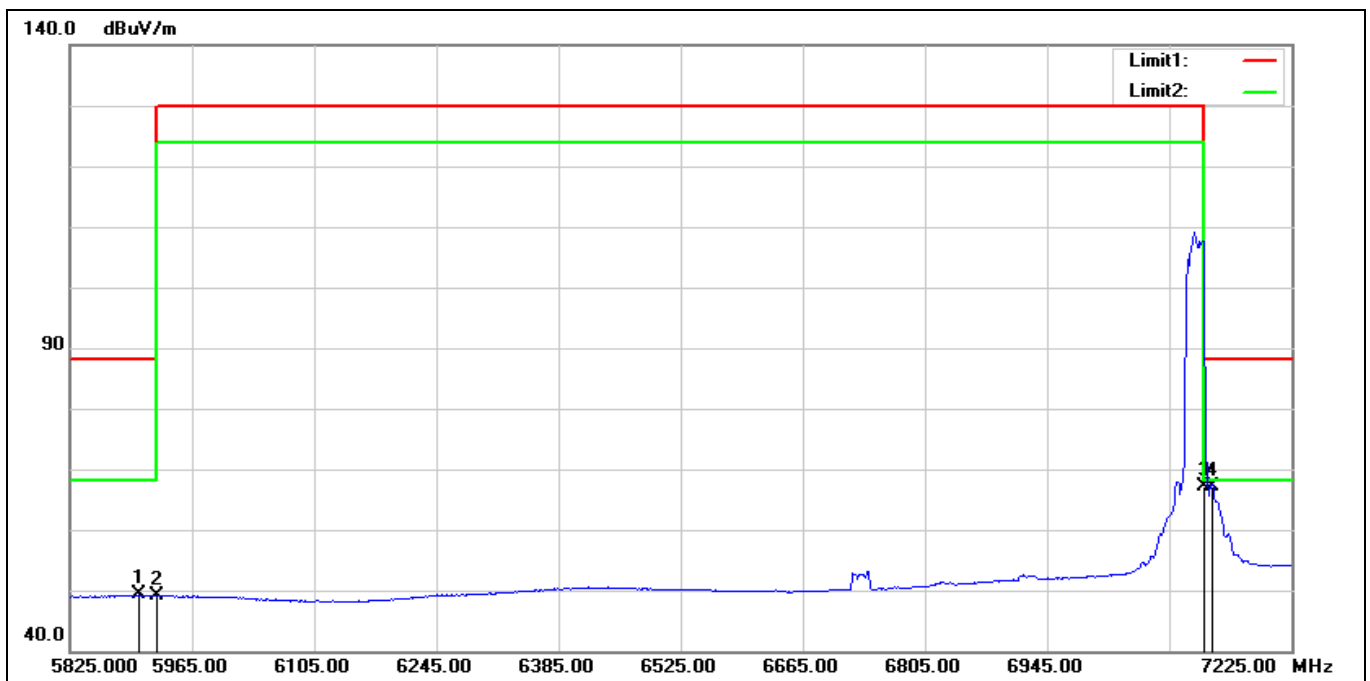


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5904.800	46.94	2.35	49.29	68.20	-18.91	AVG
2	5925.000	46.87	2.23	49.10	68.20	-19.10	AVG
3*	7125.000	60.50	6.69	67.19	68.20	-1.01	AVG
4	7134.000	60.40	6.73	67.13	68.20	-1.07	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

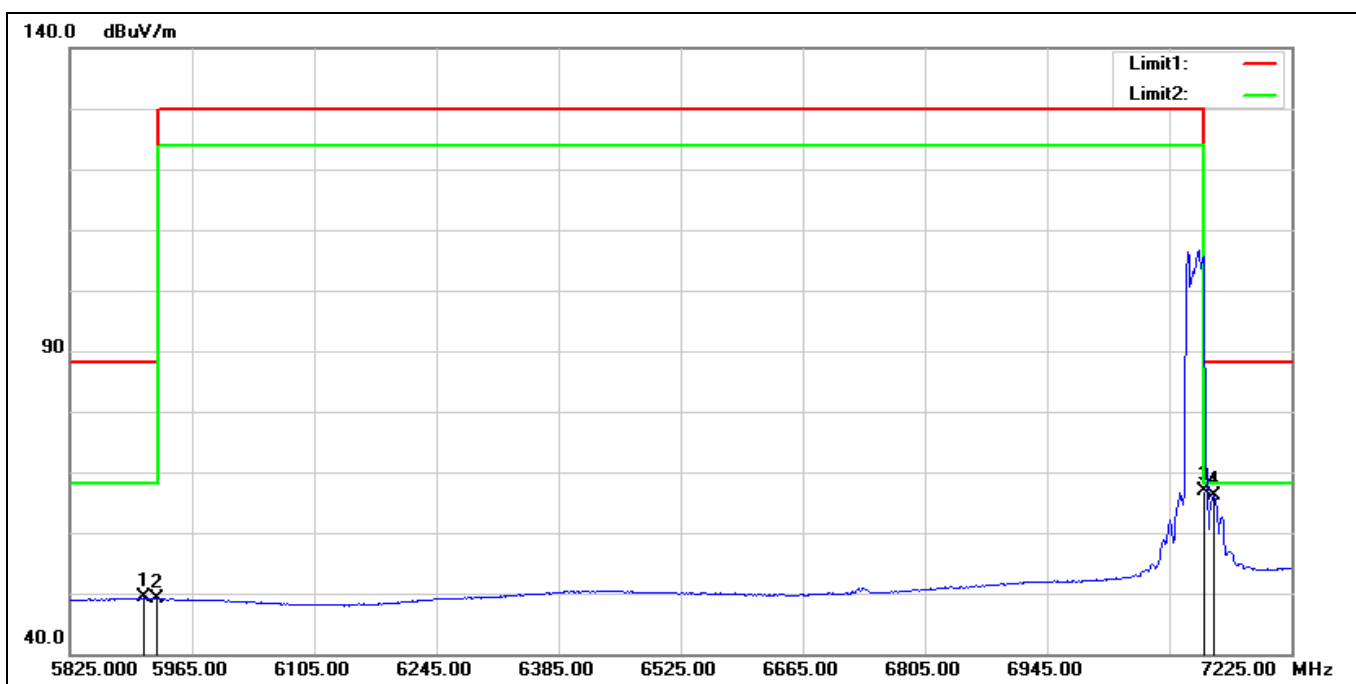


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5910.400	47.01	2.32	49.33	68.20	-18.87	AVG
2	5925.000	46.83	2.23	49.06	68.20	-19.14	AVG
3*	7125.000	60.24	6.69	66.93	68.20	-1.27	AVG
4	7136.800	59.42	6.73	66.15	68.20	-2.05	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5965 MHz
Remark:

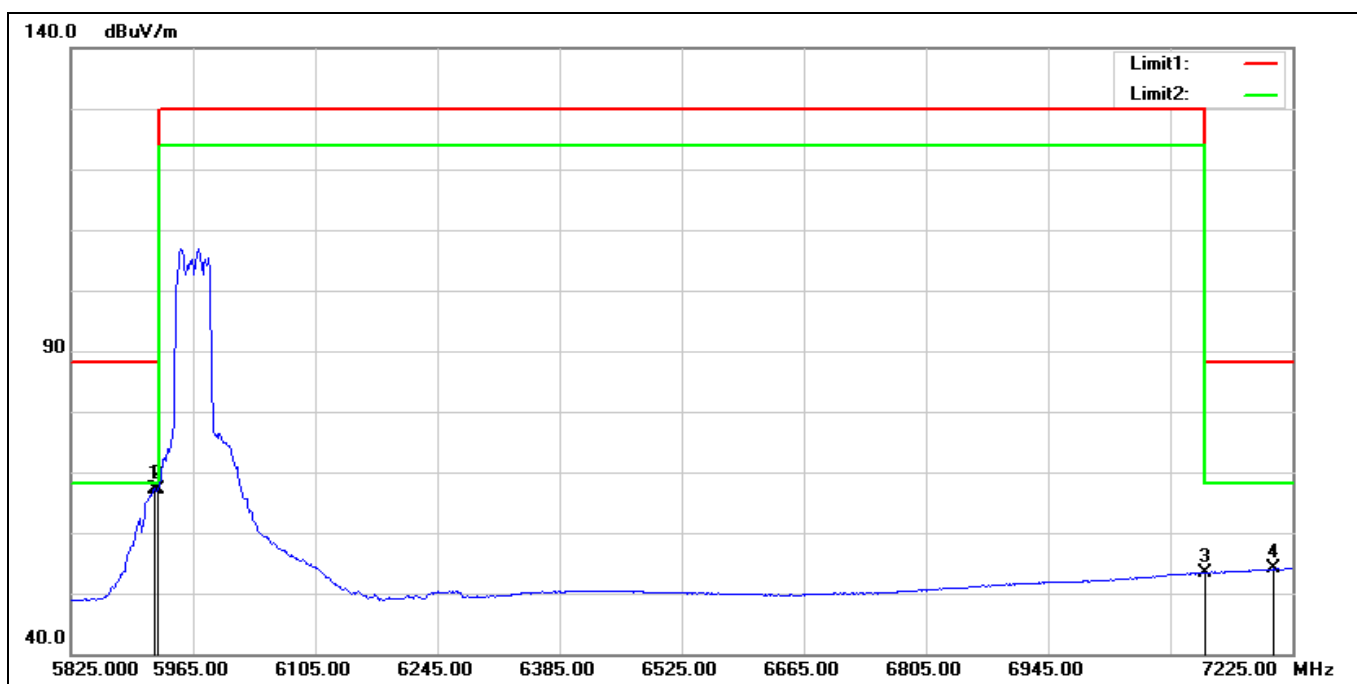


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5920.200	64.92	2.25	67.17	68.20	-1.03	AVG
2	5925.000	64.92	2.23	67.15	68.20	-1.05	AVG
3	7125.000	46.70	6.69	53.39	68.20	-14.81	AVG
4	7202.600	47.14	7.04	54.18	68.20	-14.02	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

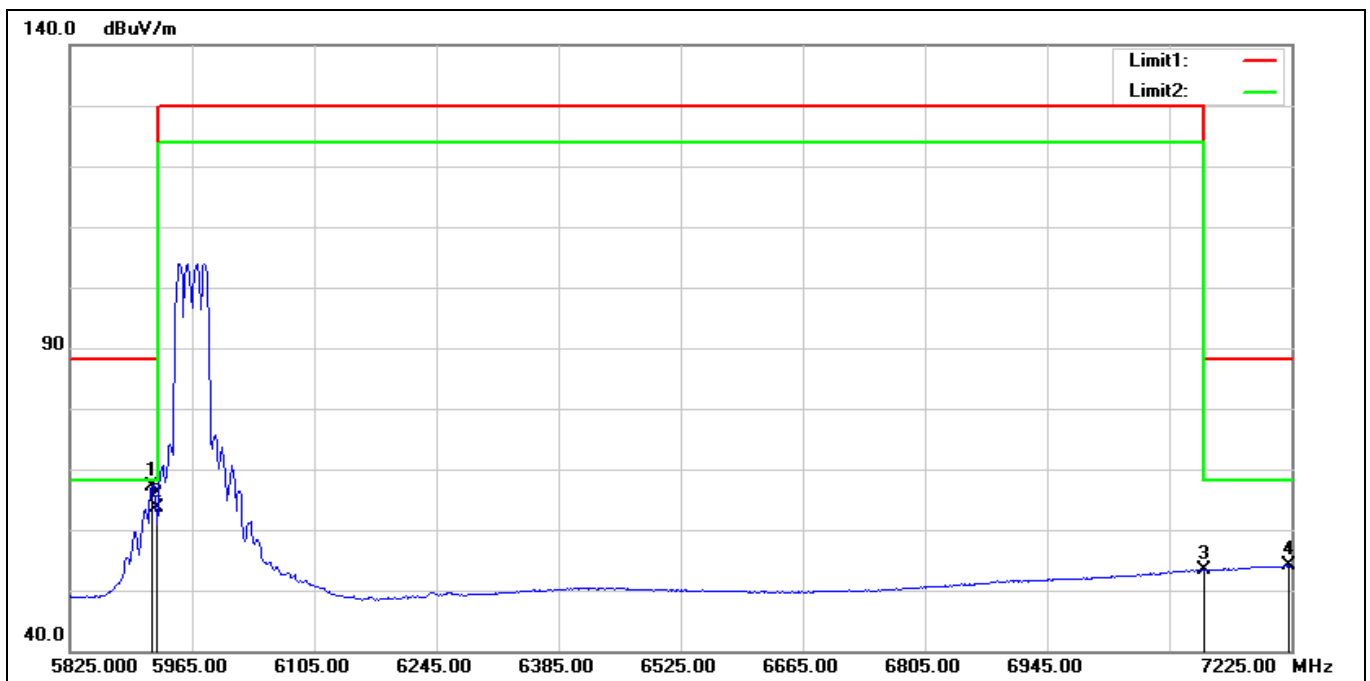


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	64.83	2.26	67.09	68.20	-1.11	AVG
2	5925.000	61.40	2.23	63.63	68.20	-4.57	AVG
3	7125.000	46.58	6.69	53.27	68.20	-14.93	AVG
4	7222.200	47.06	7.09	54.15	68.20	-14.05	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

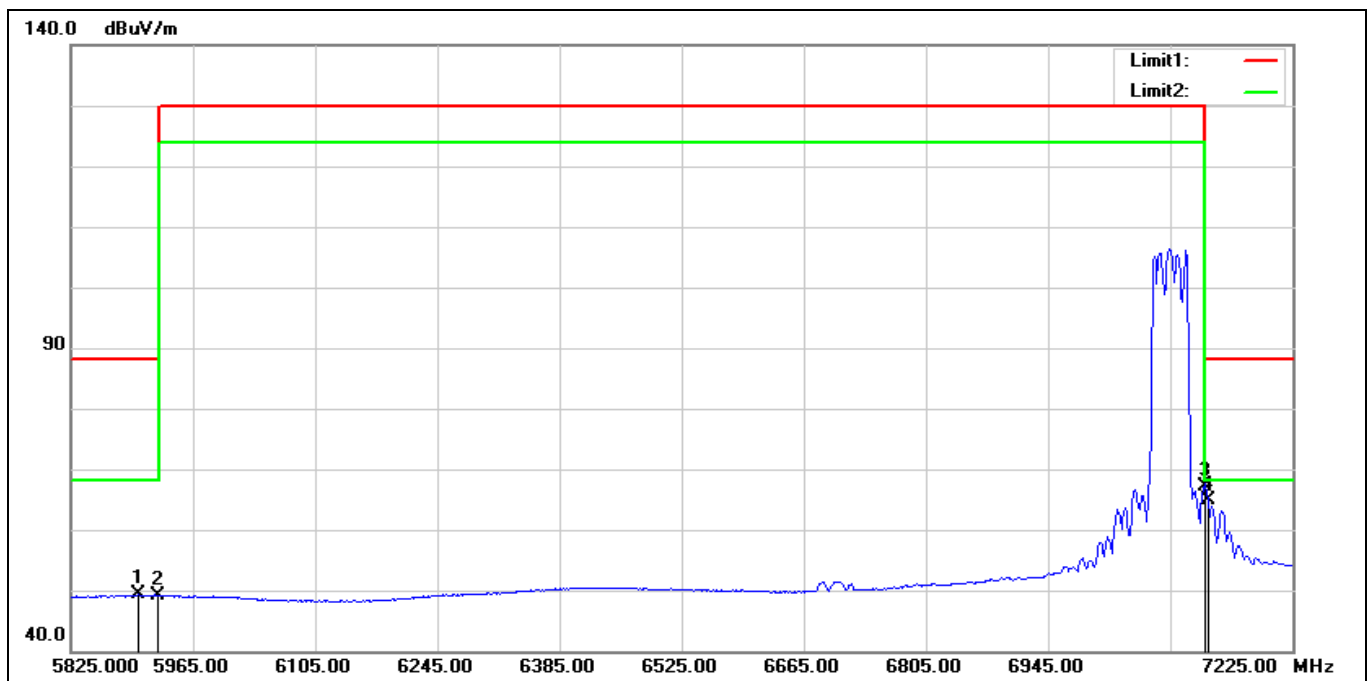


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5902.000	46.92	2.37	49.29	68.20	-18.91	AVG
2	5925.000	46.88	2.23	49.11	68.20	-19.09	AVG
3*	7125.000	60.42	6.69	67.11	68.20	-1.09	AVG
4	7128.400	58.30	6.70	65.00	68.20	-3.20	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

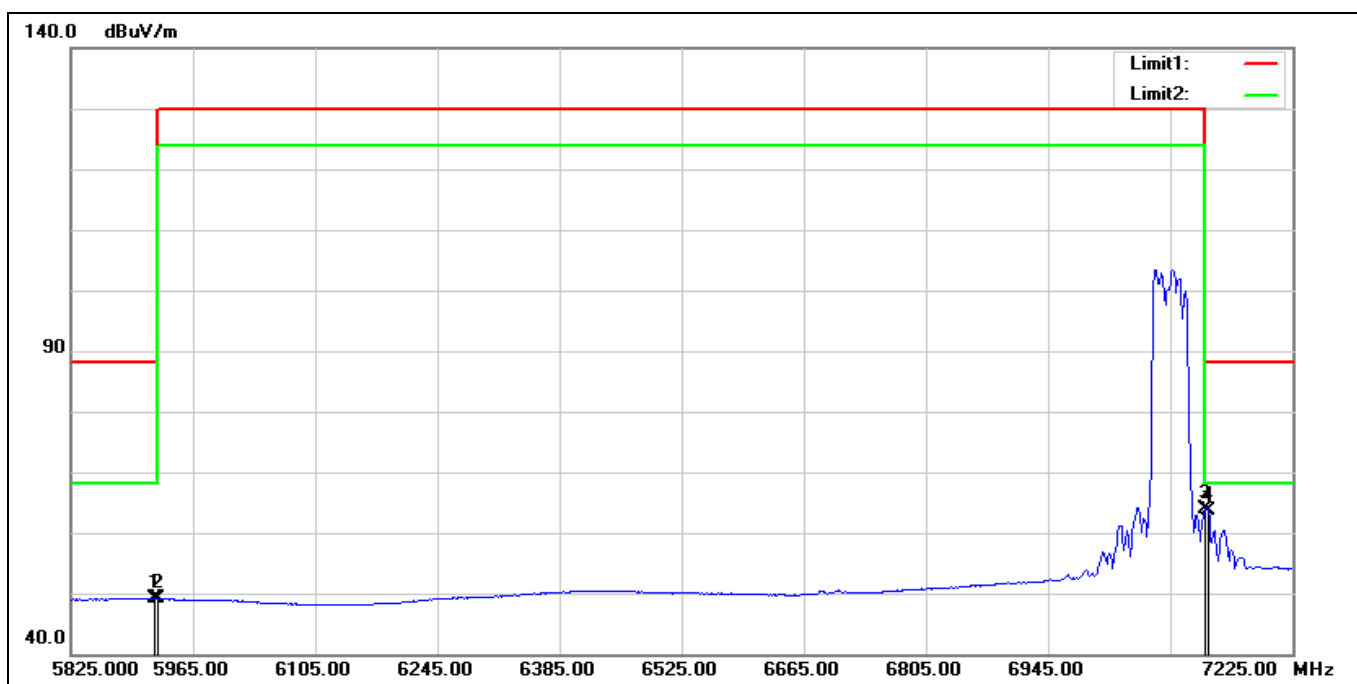


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5920.200	47.00	2.25	49.25	68.20	-18.95	AVG
2	5925.000	46.83	2.23	49.06	68.20	-19.14	AVG
3*	7125.000	57.26	6.69	63.95	68.20	-4.25	AVG
4	7128.400	56.88	6.70	63.58	68.20	-4.62	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

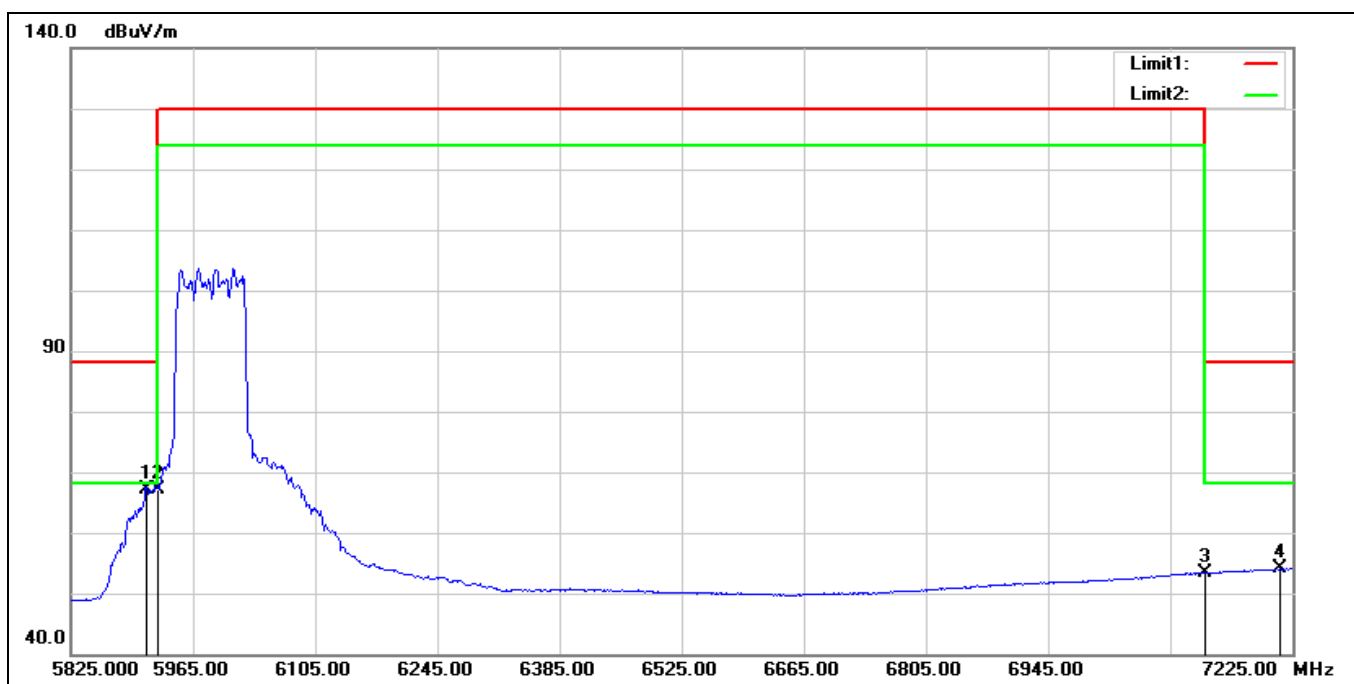


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5911.800	64.85	2.31	67.16	68.20	-1.04	AVG
2	5925.000	64.88	2.23	67.11	68.20	-1.09	AVG
3	7125.000	46.63	6.69	53.32	68.20	-14.88	AVG
4	7211.000	46.99	7.06	54.05	68.20	-14.15	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

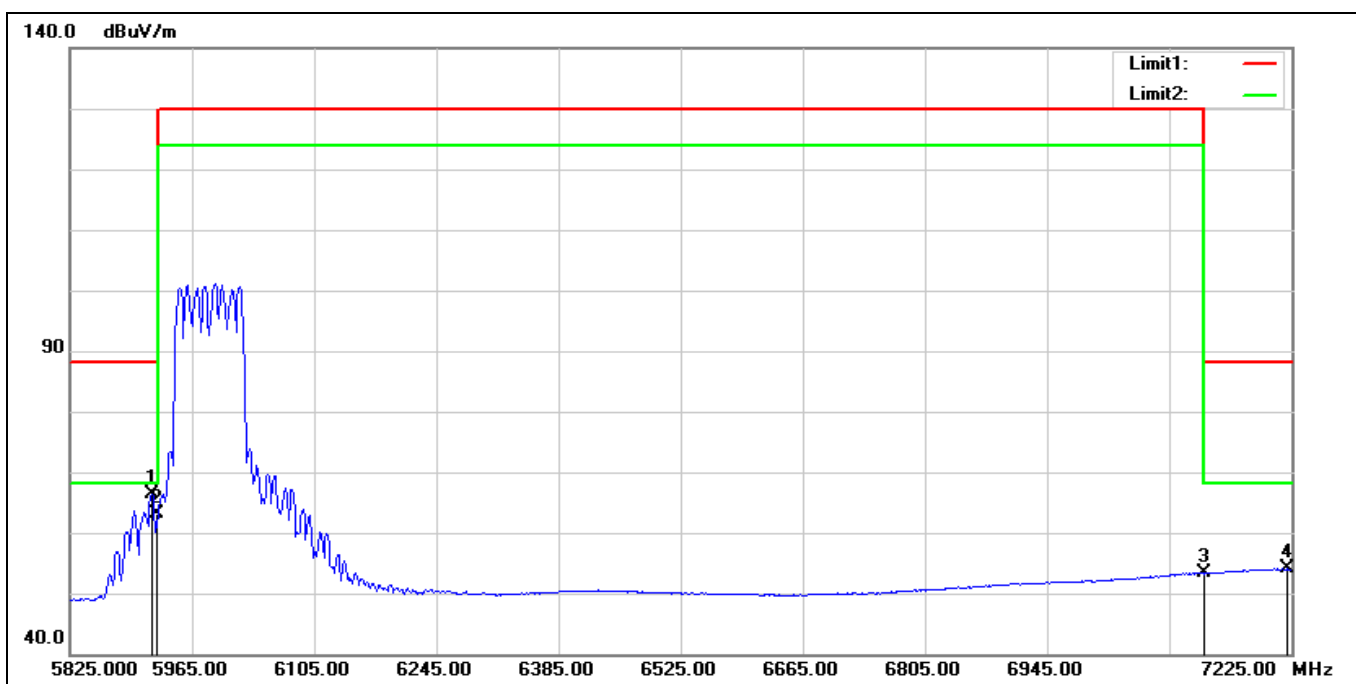


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	64.19	2.26	66.45	68.20	-1.75	AVG
2	5925.000	60.99	2.23	63.22	68.20	-4.98	AVG
3	7125.000	46.72	6.69	53.41	68.20	-14.79	AVG
4	7220.800	47.04	7.08	54.12	68.20	-14.08	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

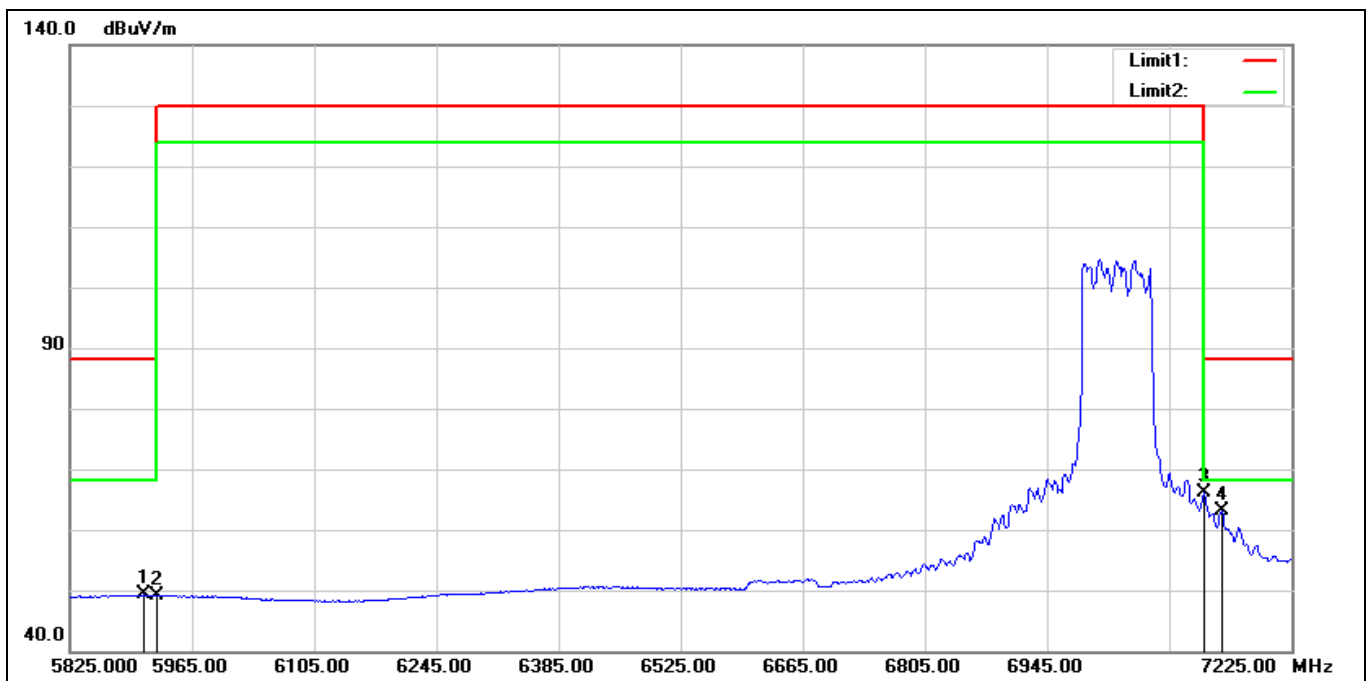


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5909.000	46.98	2.32	49.30	68.20	-18.90	AVG
2	5925.000	46.93	2.23	49.16	68.20	-19.04	AVG
3*	7125.000	59.37	6.69	66.06	68.20	-2.14	AVG
4	7145.200	56.36	6.76	63.12	68.20	-5.08	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

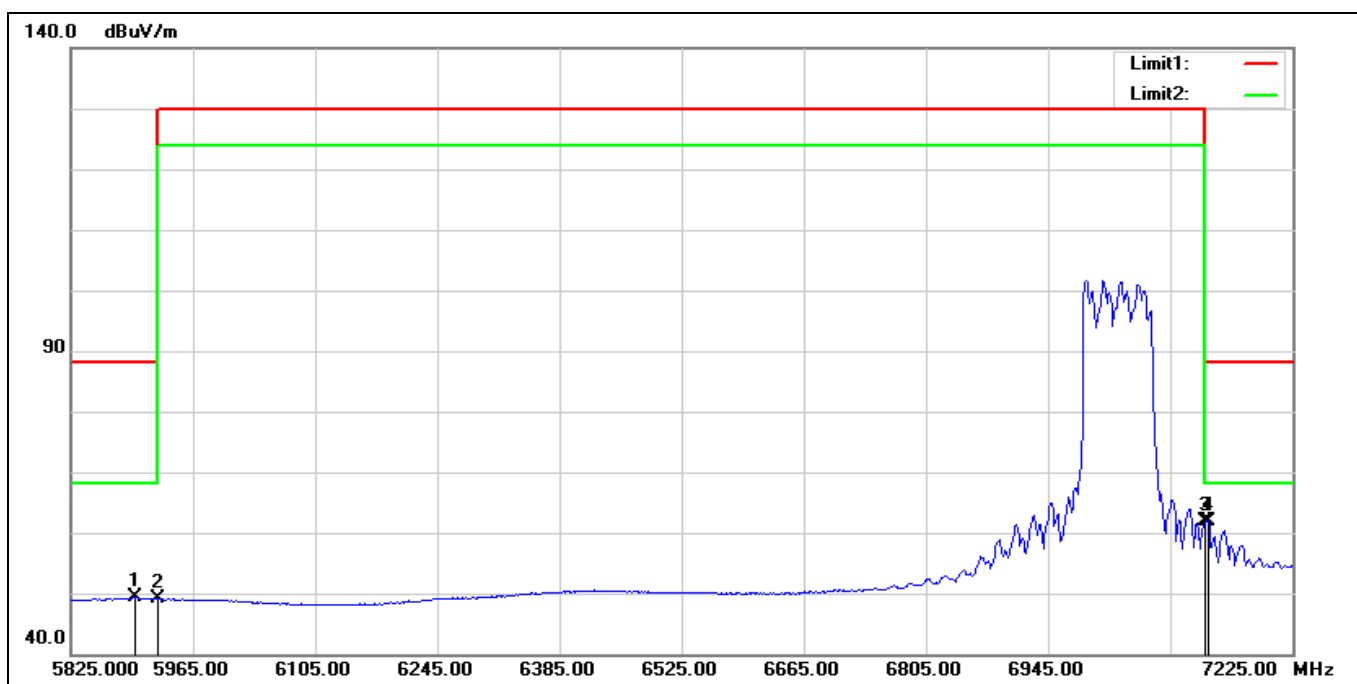


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5899.200	46.93	2.38	49.31	68.20	-18.89	AVG
2	5925.000	46.86	2.23	49.09	68.20	-19.11	AVG
3*	7125.000	55.31	6.69	62.00	68.20	-6.20	AVG
4	7128.400	55.23	6.70	61.93	68.20	-6.27	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

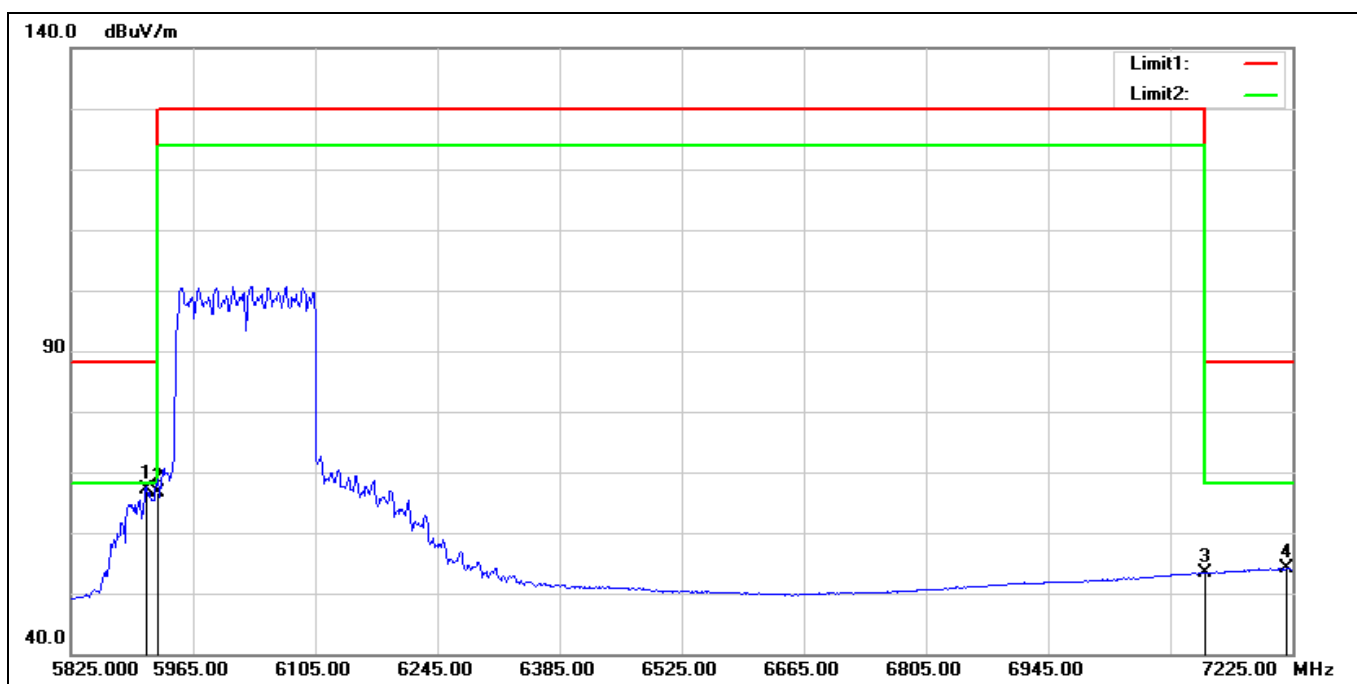


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5911.800	64.87	2.31	67.18	68.20	-1.02	AVG
2	5925.000	64.41	2.23	66.64	68.20	-1.56	AVG
3	7125.000	46.60	6.69	53.29	68.20	-14.91	AVG
4	7218.000	47.01	7.08	54.09	68.20	-14.11	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

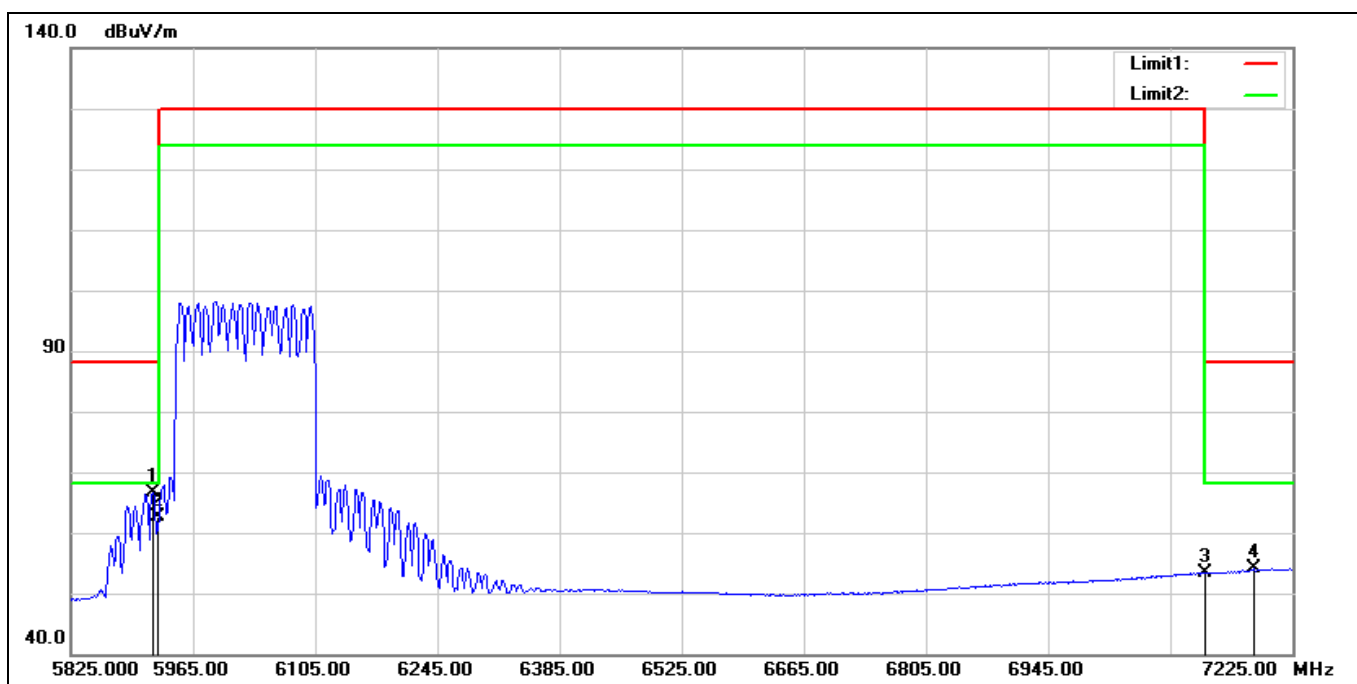


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	64.30	2.26	66.56	68.20	-1.64	AVG
2	5925.000	60.31	2.23	62.54	68.20	-5.66	AVG
3	7125.000	46.65	6.69	53.34	68.20	-14.86	AVG
4	7180.200	47.12	6.92	54.04	68.20	-14.16	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT160 6985 MHz
Remark:

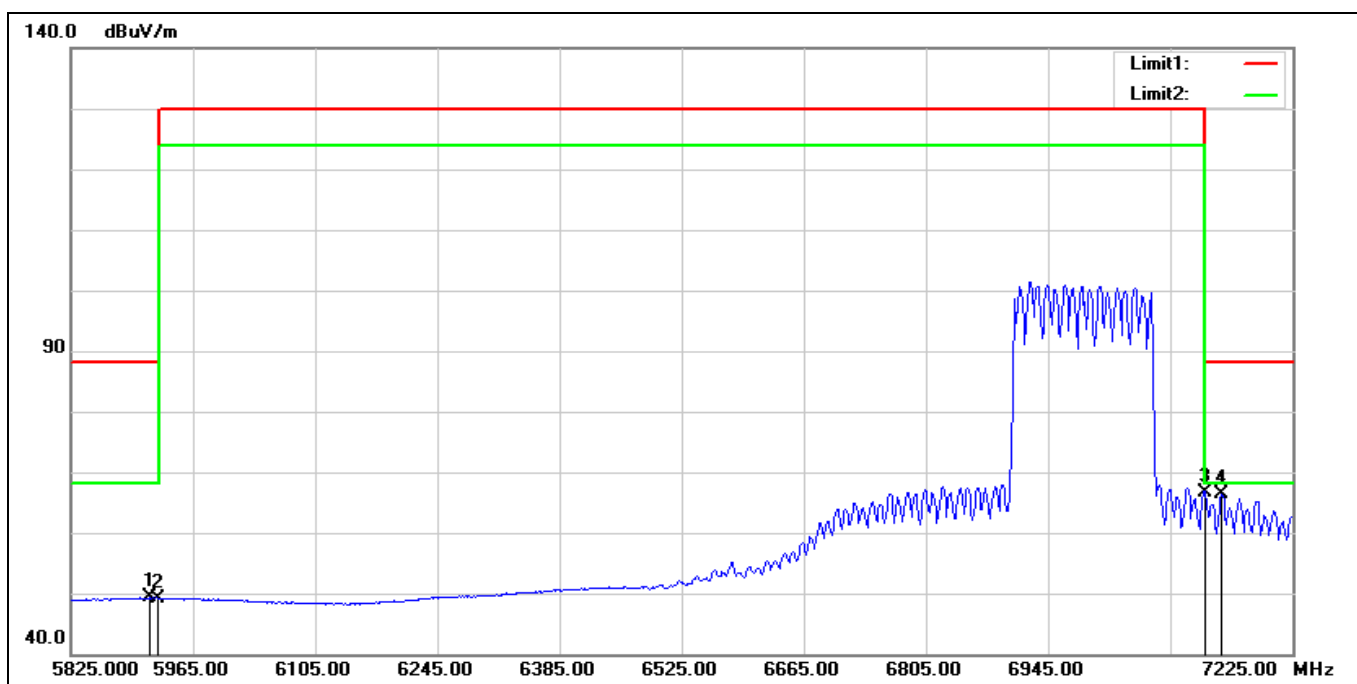


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5914.600	46.98	2.29	49.27	68.20	-18.93	AVG
2	5925.000	47.01	2.23	49.24	68.20	-18.96	AVG
3*	7125.000	60.04	6.69	66.73	68.20	-1.47	AVG
4	7143.800	59.52	6.76	66.28	68.20	-1.92	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

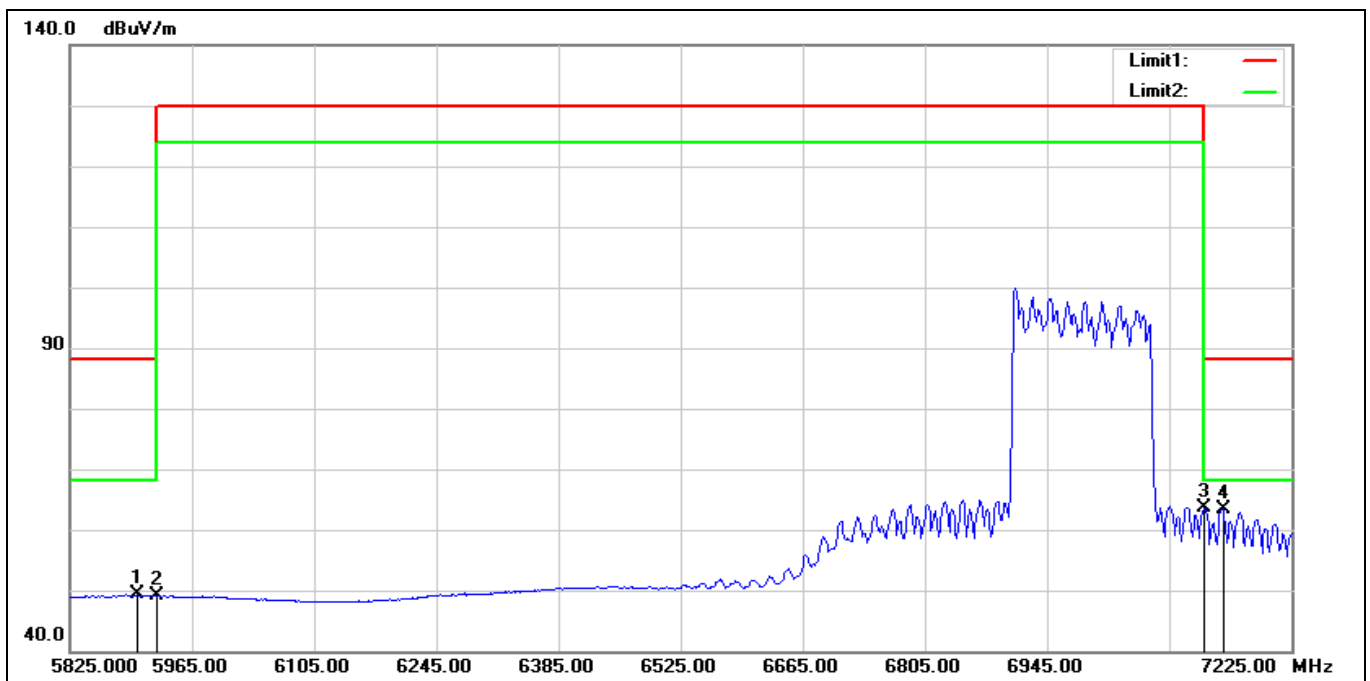


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5902.000	46.94	2.37	49.31	68.20	-18.89	AVG
2	5925.000	46.79	2.23	49.02	68.20	-19.18	AVG
3*	7125.000	56.88	6.69	63.57	68.20	-4.63	AVG
4	7146.600	56.53	6.76	63.29	68.20	-4.91	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

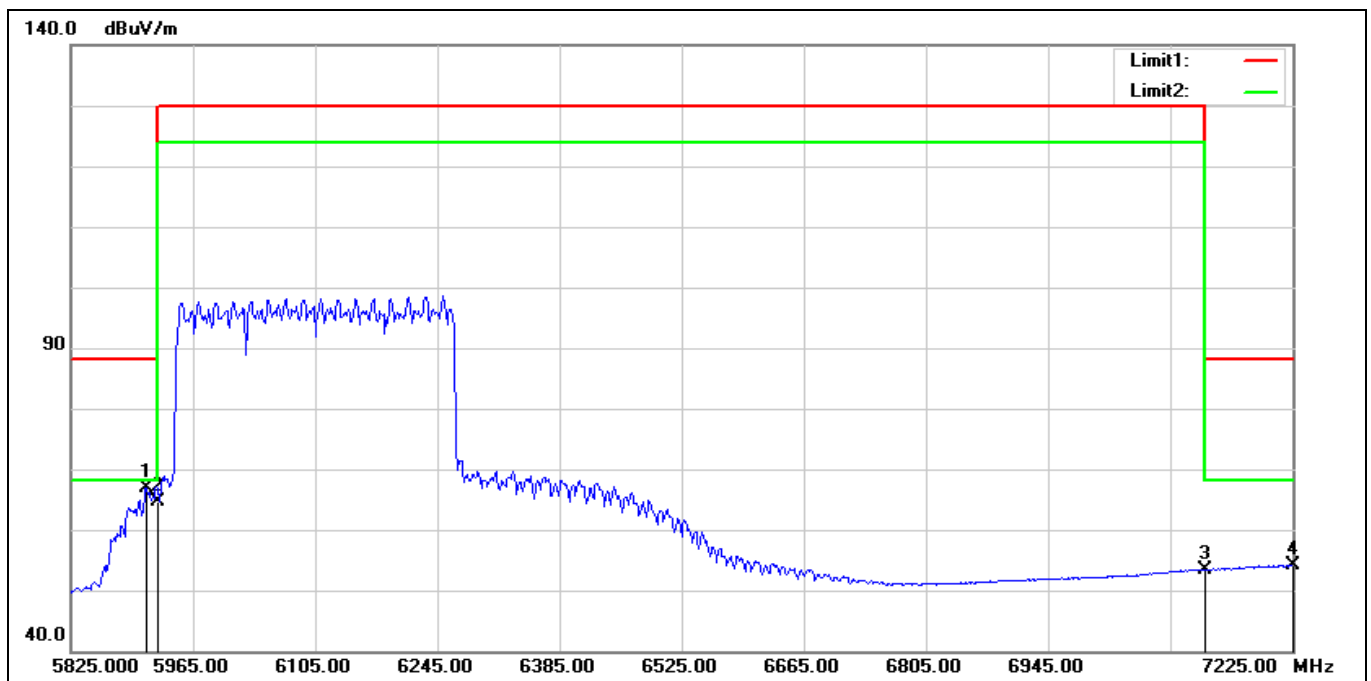


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5911.800	64.58	2.31	66.89	68.20	-1.31	AVG
2	5925.000	62.46	2.23	64.69	68.20	-3.51	AVG
3	7125.000	46.72	6.69	53.41	68.20	-14.79	AVG
4	7225.000	47.03	7.10	54.13	68.20	-14.07	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

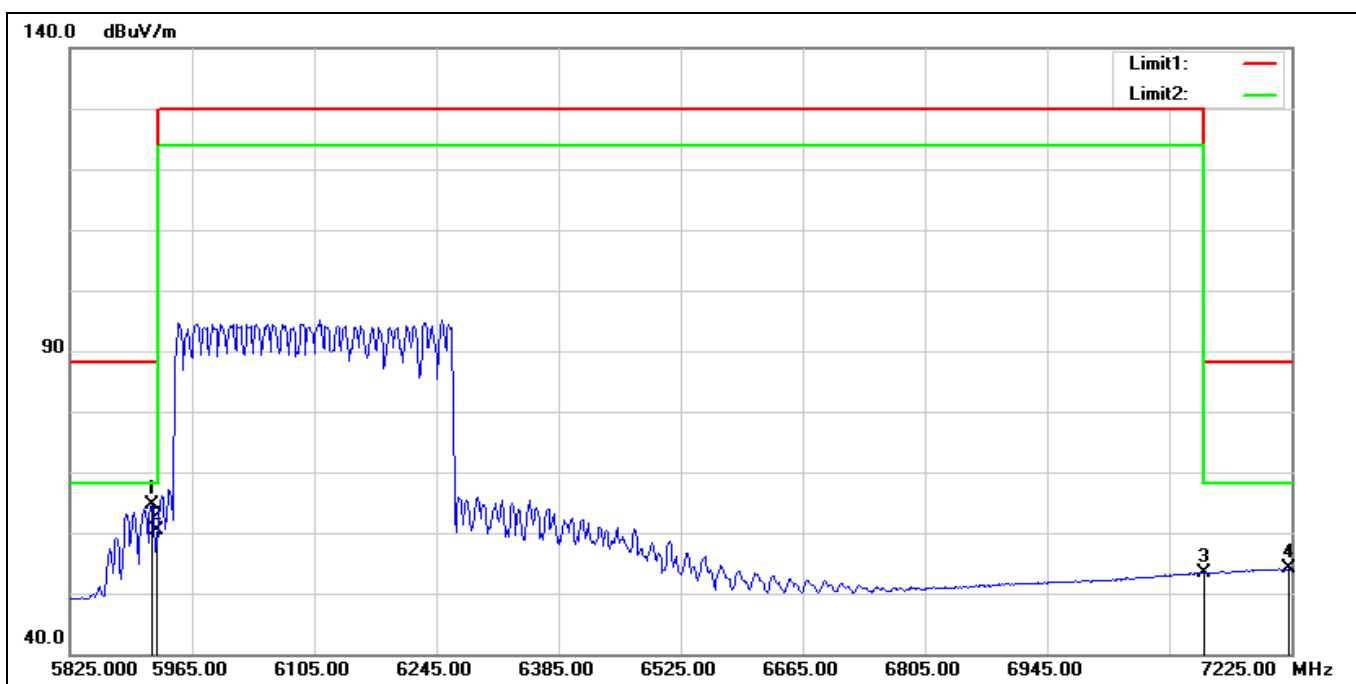


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	62.35	2.26	64.61	68.20	-3.59	AVG
2	5925.000	58.23	2.23	60.46	68.20	-7.74	AVG
3	7125.000	46.73	6.69	53.42	68.20	-14.78	AVG
4	7222.200	47.01	7.09	54.10	68.20	-14.10	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

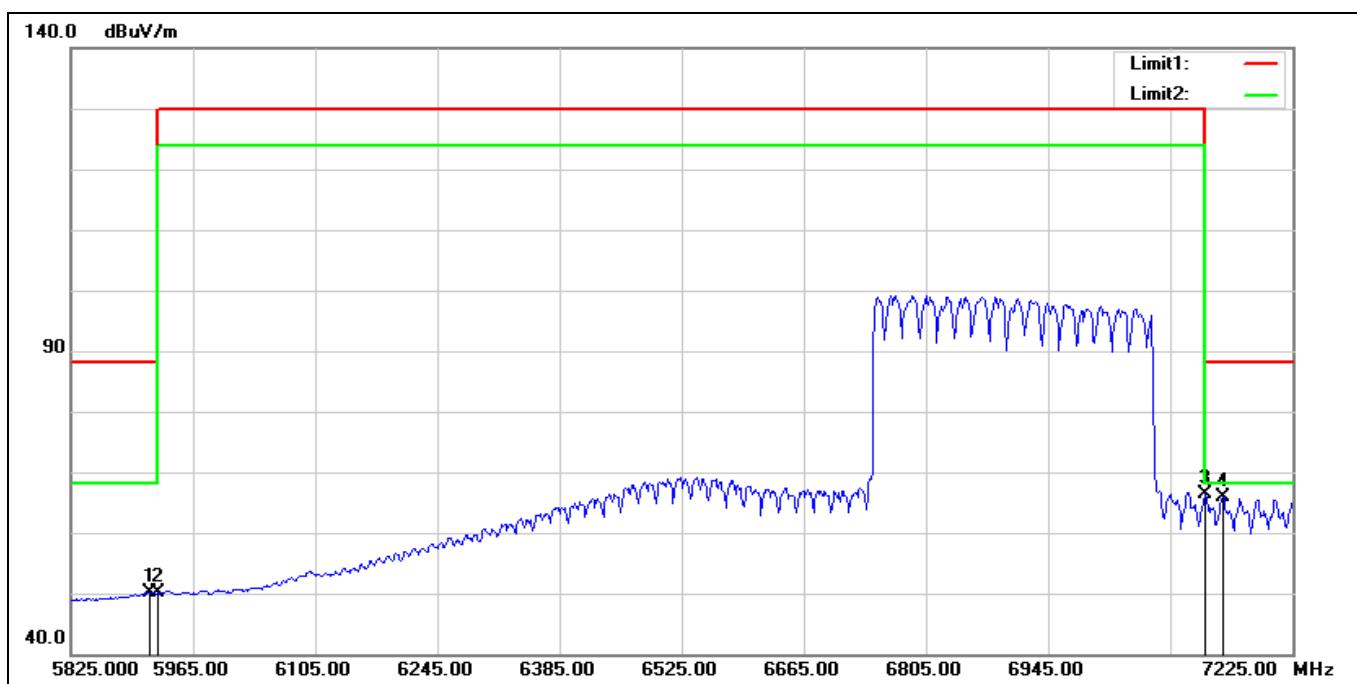

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5916.000	47.95	2.28	50.23	68.20	-17.97	AVG
2	5925.000	47.85	2.23	50.08	68.20	-18.12	AVG
3*	7125.000	59.68	6.69	66.37	68.20	-1.83	AVG
4	7145.200	59.20	6.76	65.96	68.20	-2.24	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

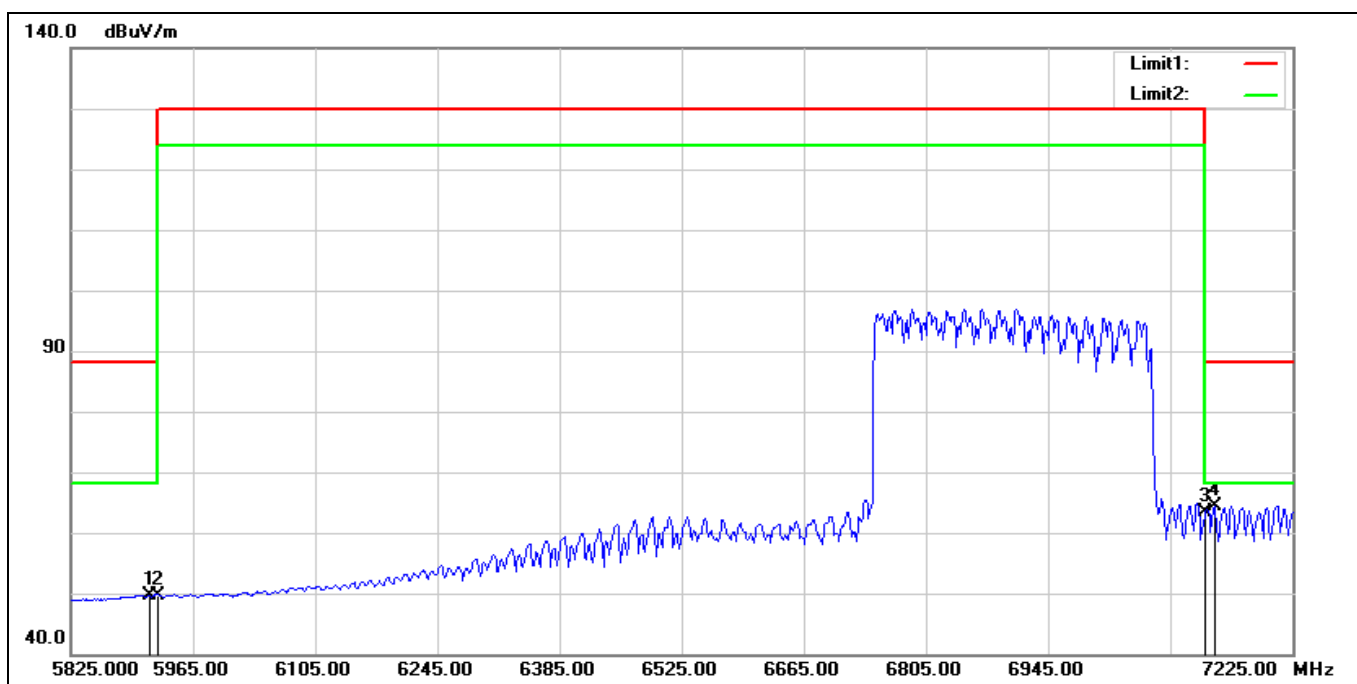


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5914.600	47.35	2.29	49.64	68.20	-18.56	AVG
2	5925.000	47.47	2.23	49.70	68.20	-18.50	AVG
3	7125.000	56.73	6.69	63.42	68.20	-4.78	AVG
4*	7135.400	57.55	6.73	64.28	68.20	-3.92	AVG

Beamforming on


Below 1 GHz

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 7115 MHz
Remark:

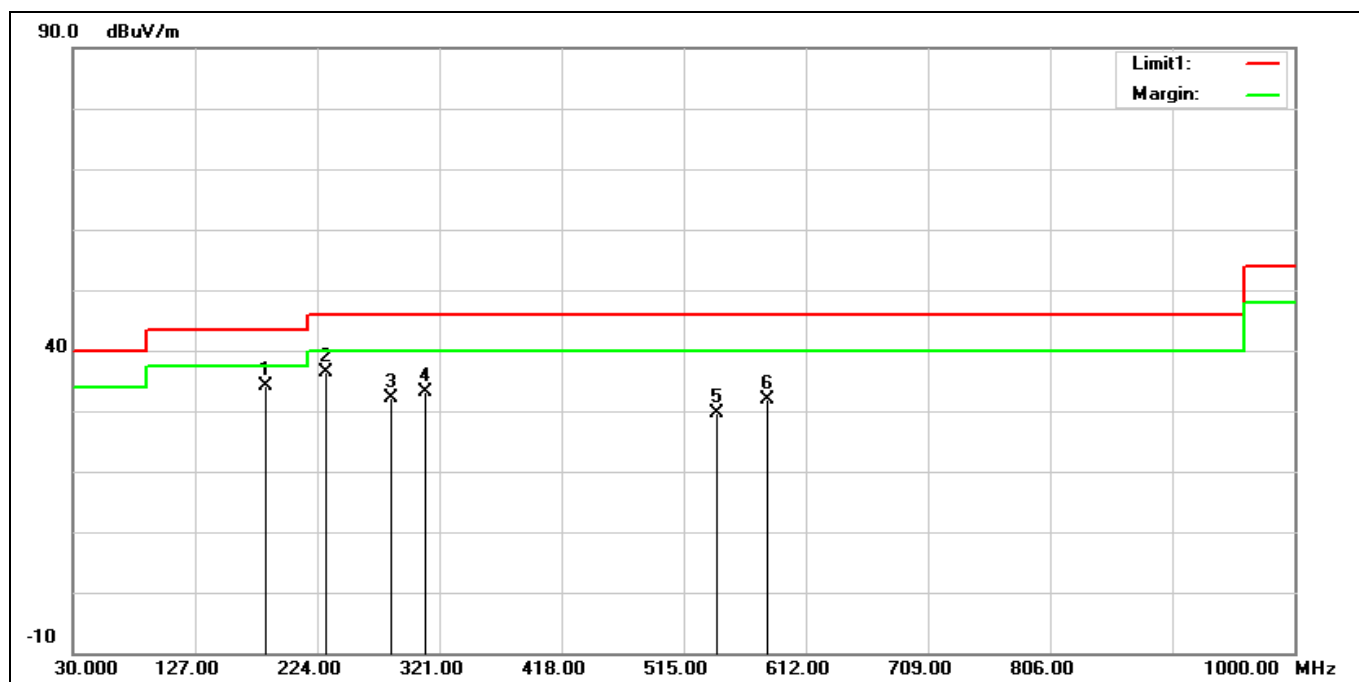

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	183.2600	42.39	-8.19	34.20	43.50	-9.30	QP
2	230.7900	44.60	-8.22	36.38	46.00	-9.62	QP
3	283.1700	37.88	-5.84	32.04	46.00	-13.96	QP
4	310.3300	38.47	-5.27	33.20	46.00	-12.80	QP
5	541.1900	30.77	-1.26	29.51	46.00	-16.49	QP
6	580.9600	32.21	-0.28	31.93	46.00	-14.07	QP

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

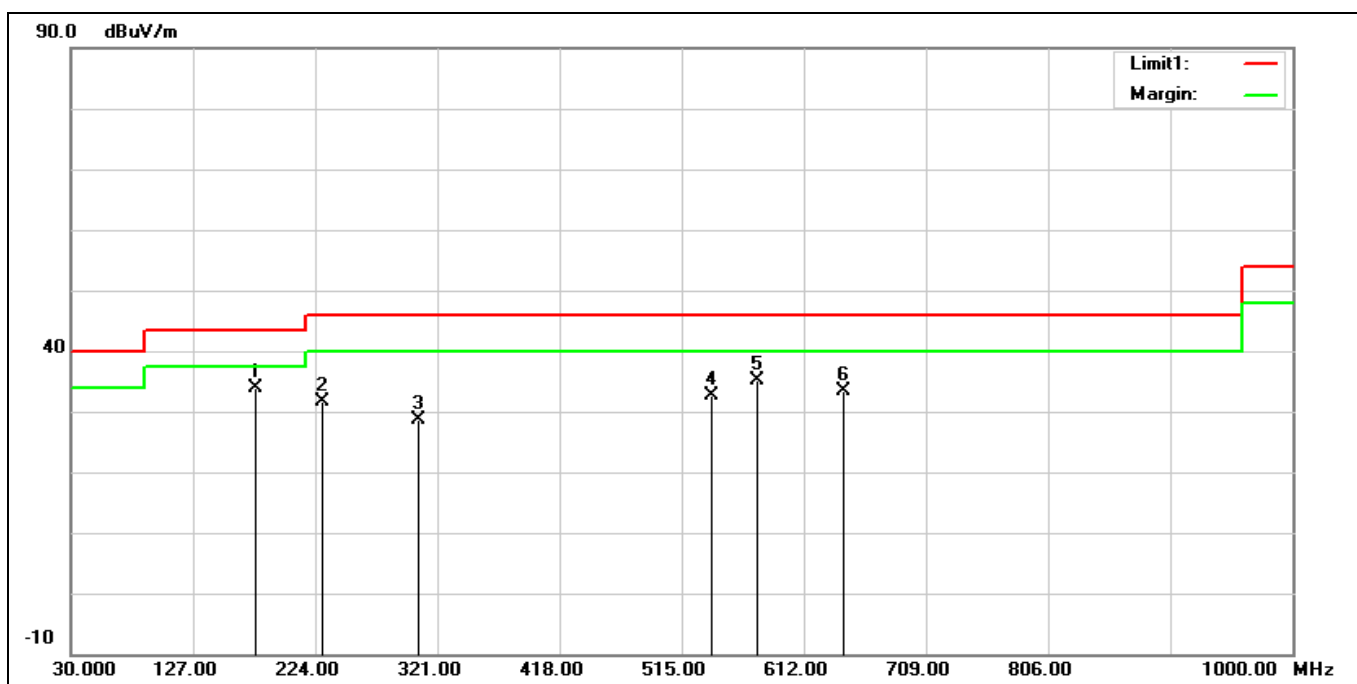


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	176.4700	41.47	-7.53	33.94	43.50	-9.56	QP
2	229.8200	39.98	-8.30	31.68	46.00	-14.32	QP
3	305.4800	33.99	-5.36	28.63	46.00	-17.37	QP
4	538.2800	34.05	-1.32	32.73	46.00	-13.27	QP
5	575.1400	35.60	-0.43	35.17	46.00	-10.83	QP
6	644.0100	32.73	0.75	33.48	46.00	-12.52	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

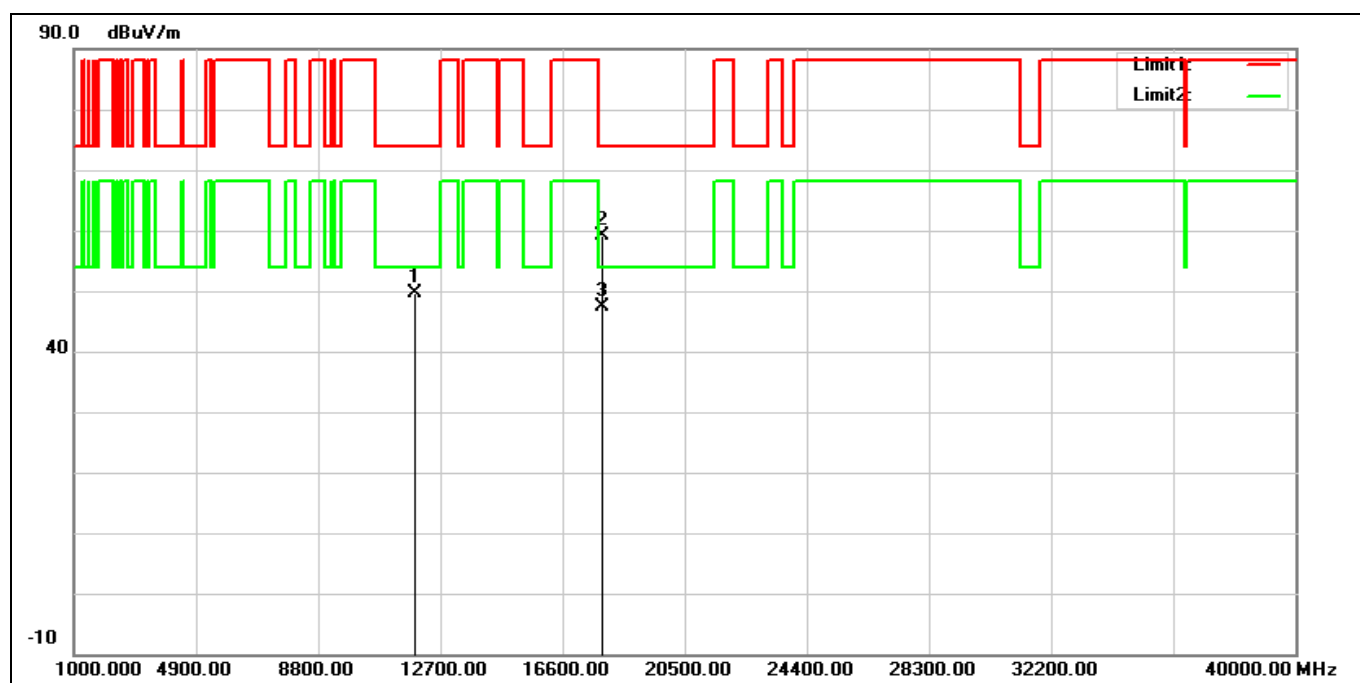


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	35.66	13.99	49.65	74.00	-24.35	peak
2	17865.000	31.45	27.60	59.05	74.00	-14.95	peak
3*	17865.000	19.66	27.60	47.26	54.00	-6.74	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 5955 MHz
Remark:

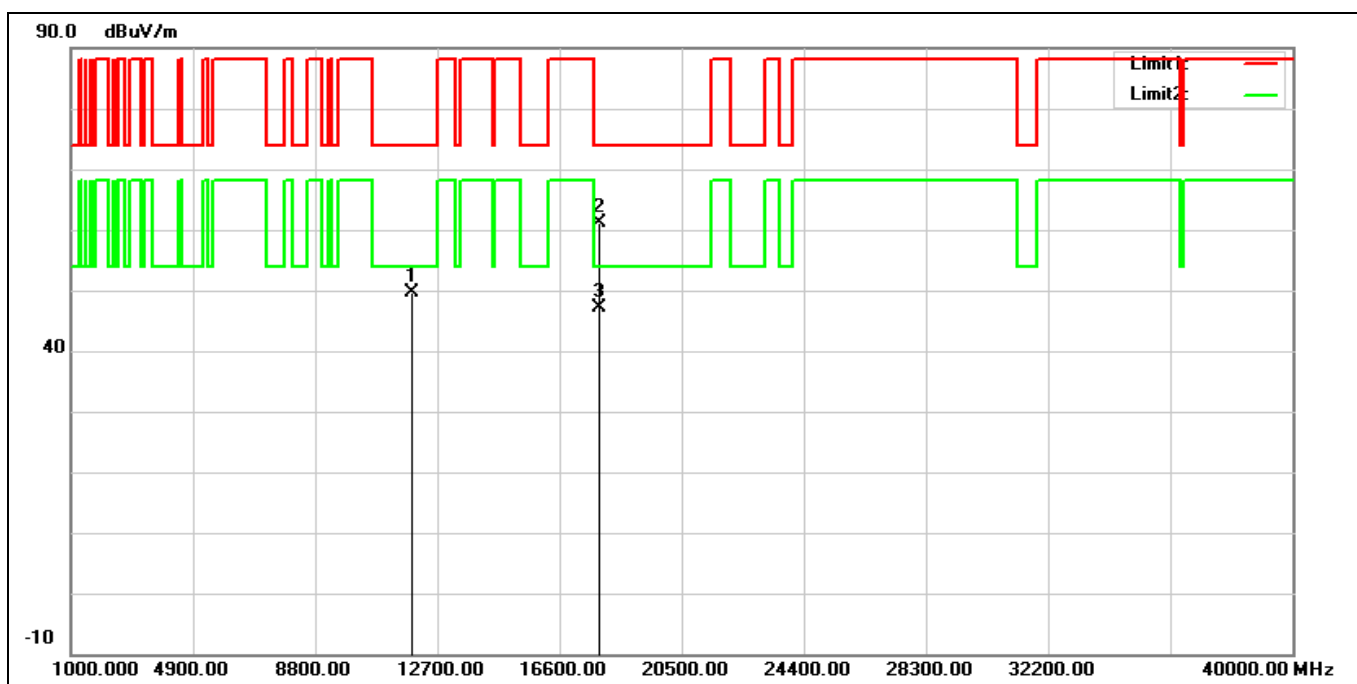


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	35.70	13.99	49.69	74.00	-24.31	peak
2	17865.000	33.42	27.60	61.02	74.00	-12.98	peak
3*	17865.000	19.51	27.60	47.11	54.00	-6.89	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6175 MHz		
Remark:			

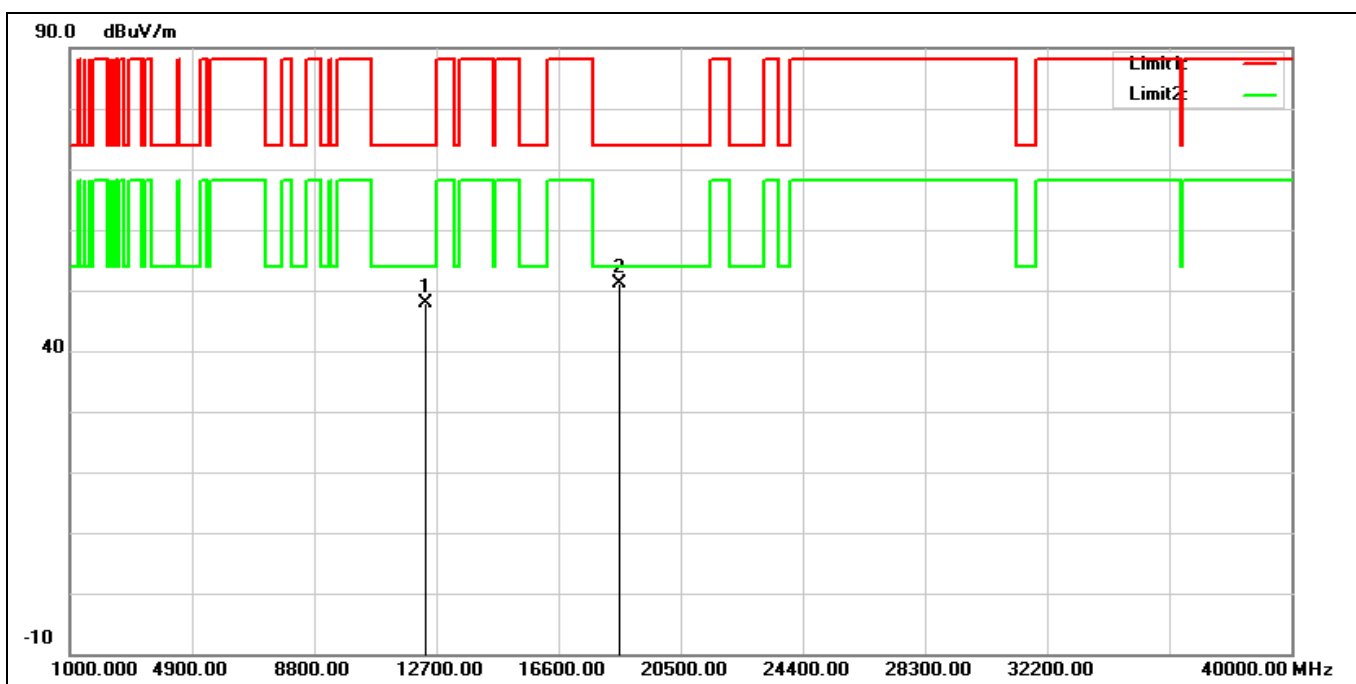


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	33.47	14.30	47.77	74.00	-26.23	peak
2*	18525.000	32.39	18.65	51.04	74.00	-22.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6175 MHz		
Remark:			

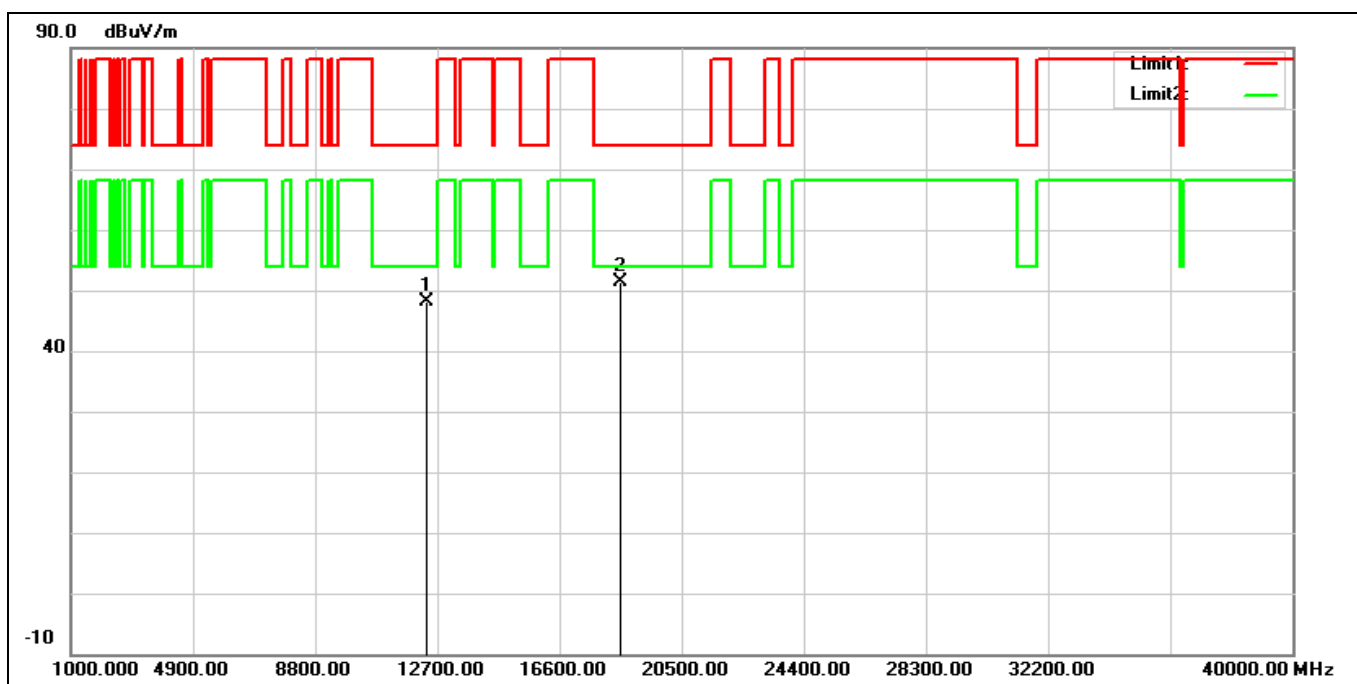


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	33.76	14.30	48.06	74.00	-25.94	peak
2*	18525.000	32.71	18.65	51.36	74.00	-22.64	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6415 MHz		
Remark:			

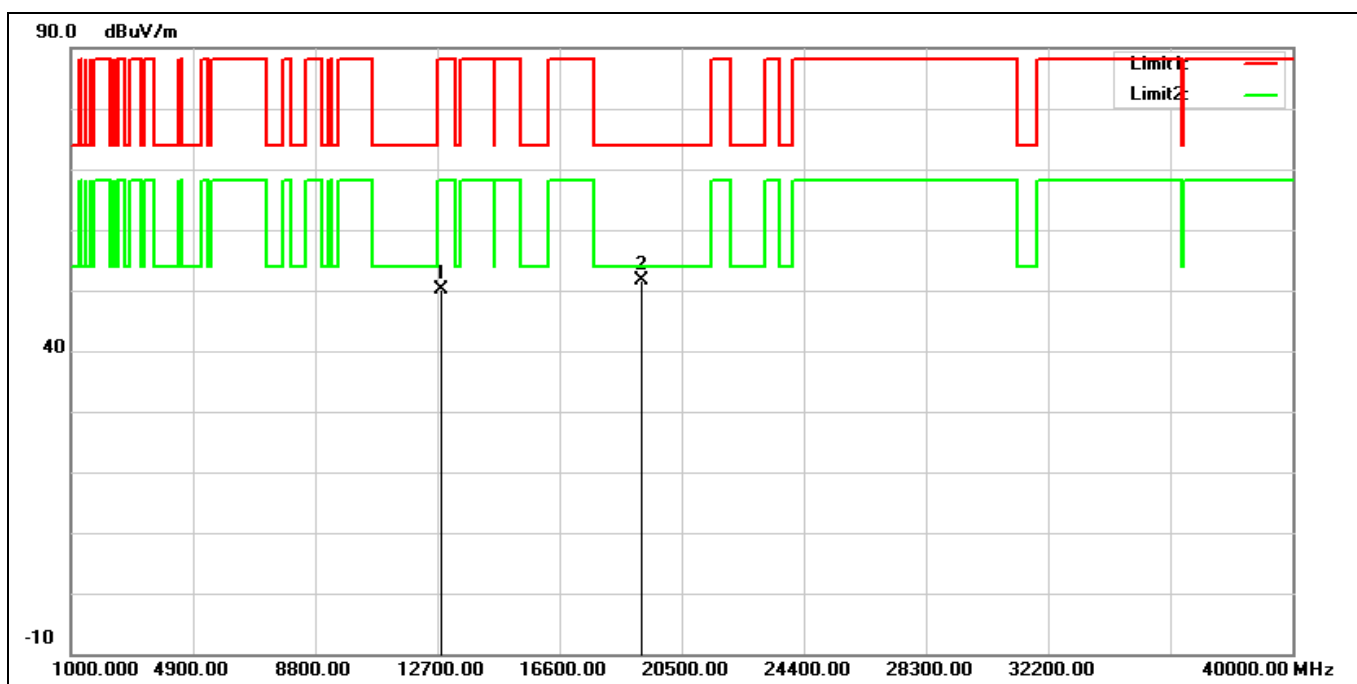


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	34.18	15.96	50.14	88.20	-38.06	peak
2*	19245.000	31.59	20.14	51.73	74.00	-22.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6415 MHz		
Remark:			

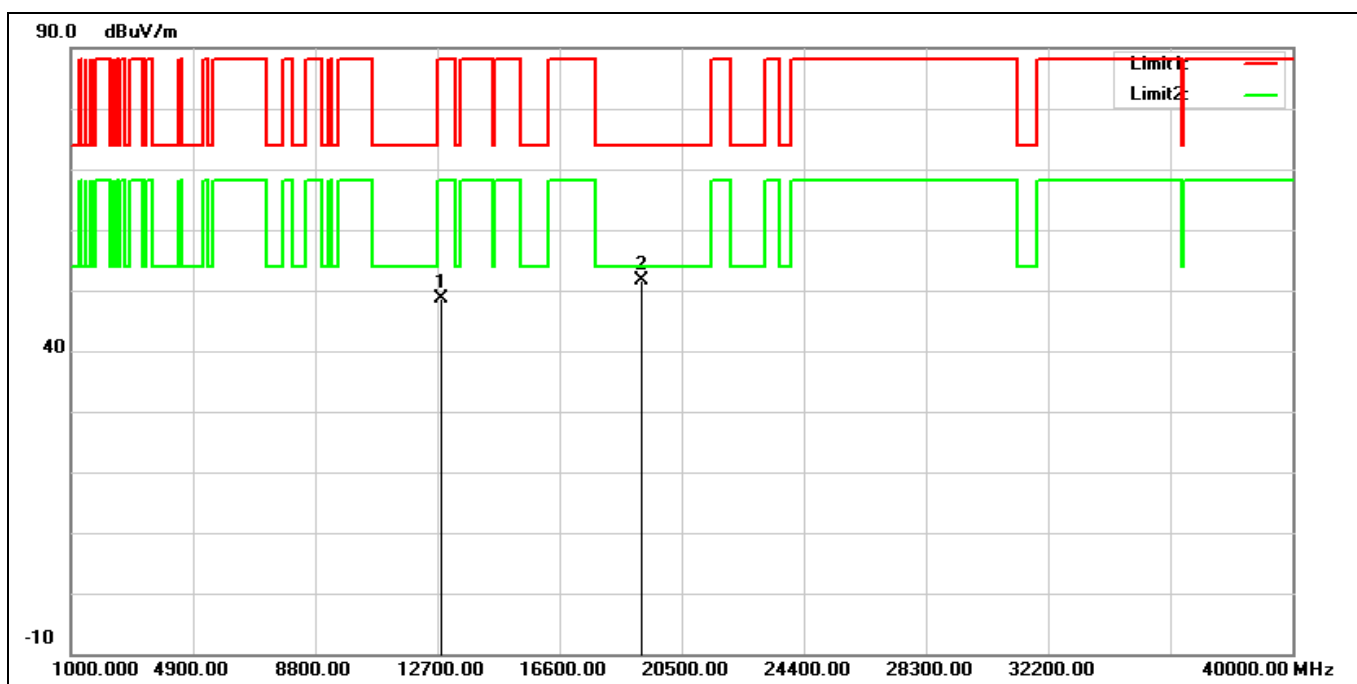


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	32.76	15.96	48.72	88.20	-39.48	peak
2*	19245.000	31.53	20.14	51.67	74.00	-22.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6435 MHz		
Remark:			

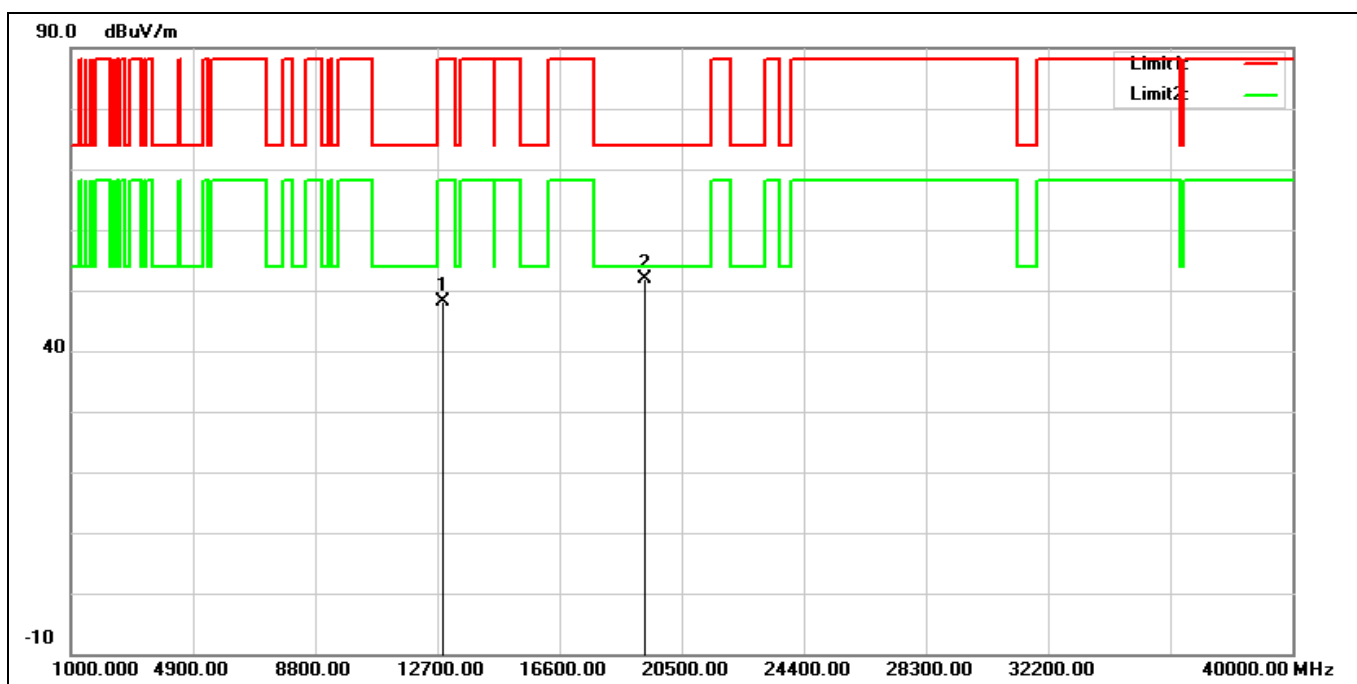


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	32.06	16.06	48.12	88.20	-40.08	peak
2*	19305.000	31.60	20.28	51.88	74.00	-22.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6435 MHz		
Remark:			

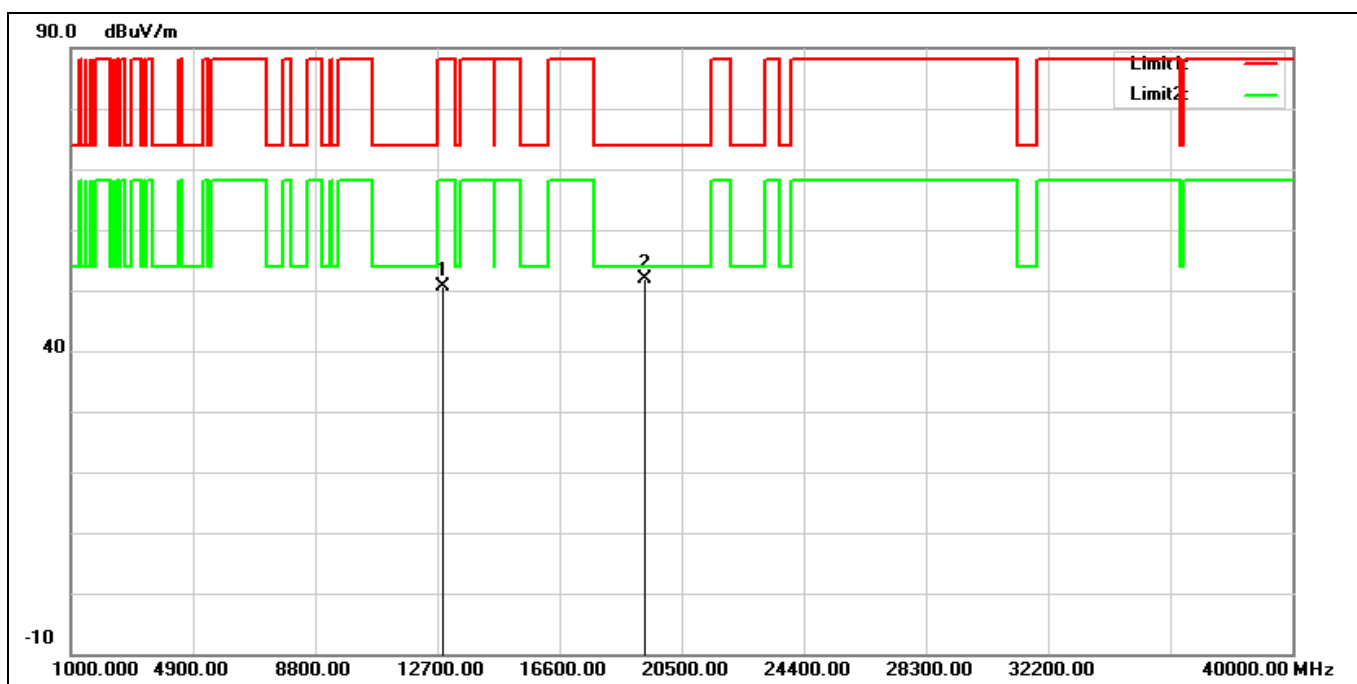


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	34.62	16.06	50.68	88.20	-37.52	peak
2*	19305.000	31.62	20.28	51.90	74.00	-22.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6475 MHz		
Remark:			

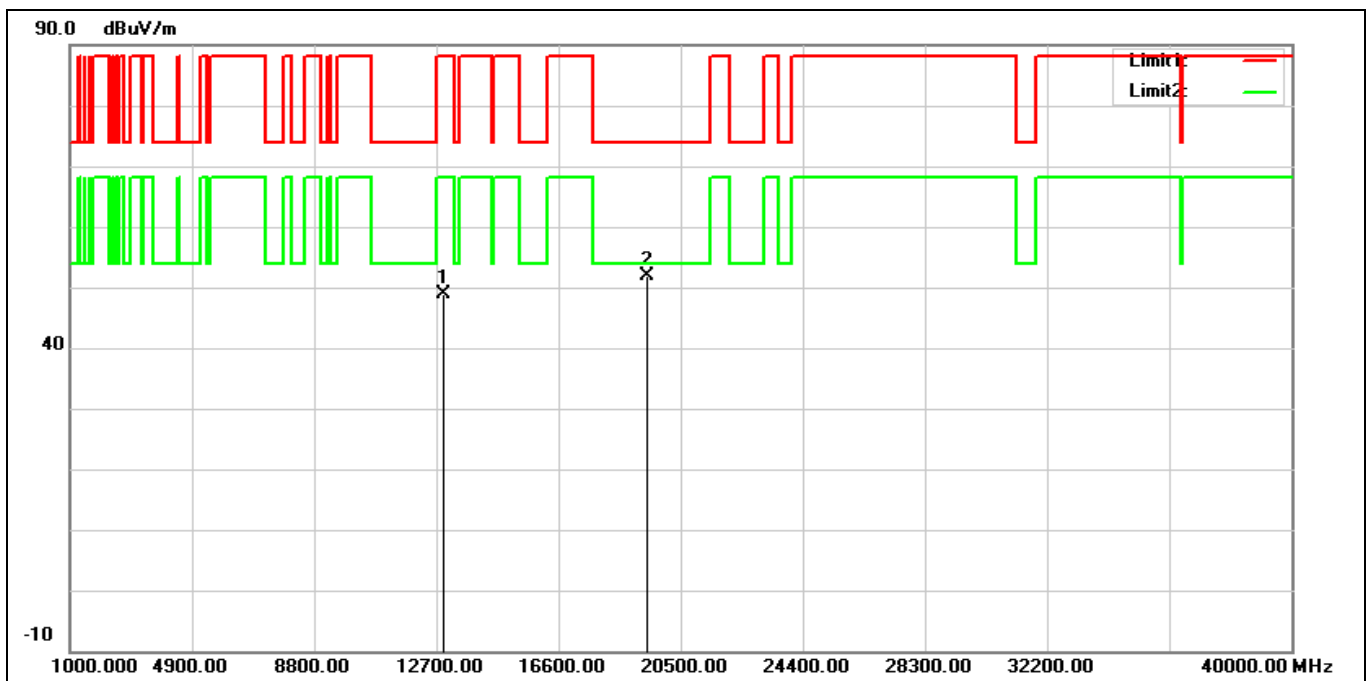


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	32.66	16.30	48.96	88.20	-39.24	peak
2*	19425.000	31.24	20.57	51.81	74.00	-22.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6475 MHz		
Remark:			

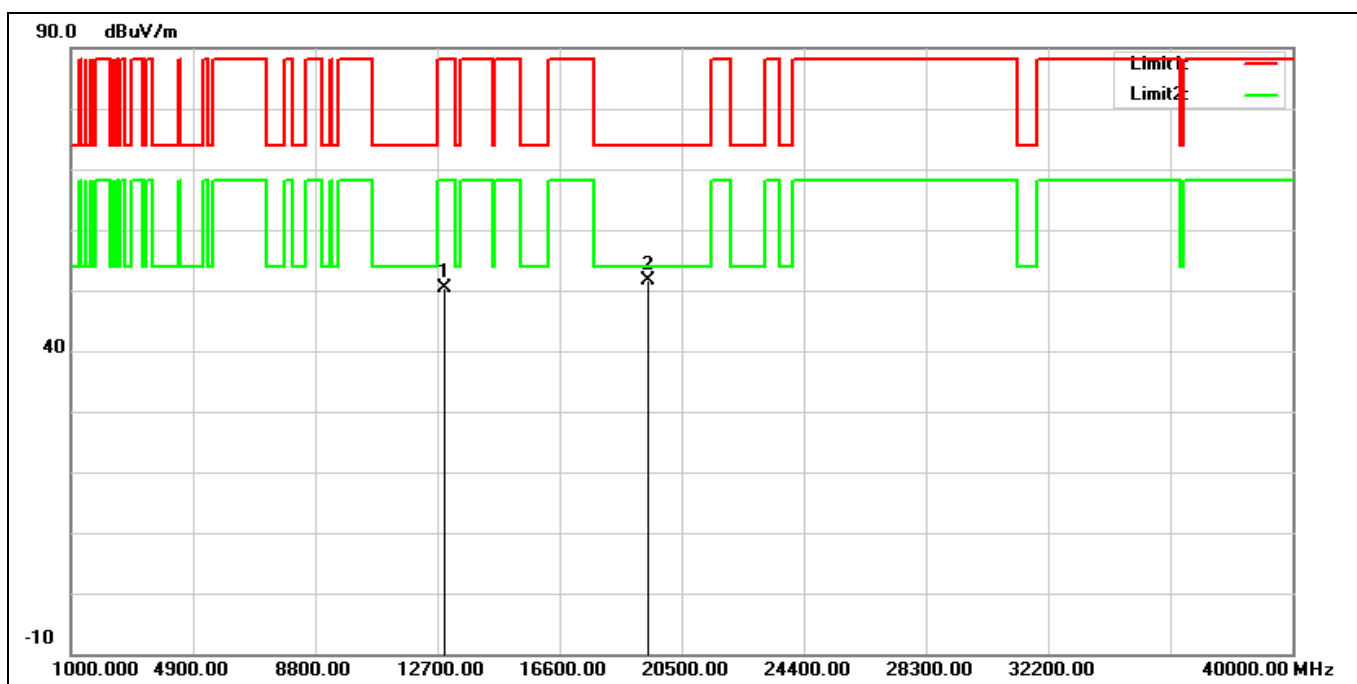


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	34.06	16.30	50.36	88.20	-37.84	peak
2*	19425.000	31.10	20.57	51.67	74.00	-22.33	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 6515 MHz
Remark:

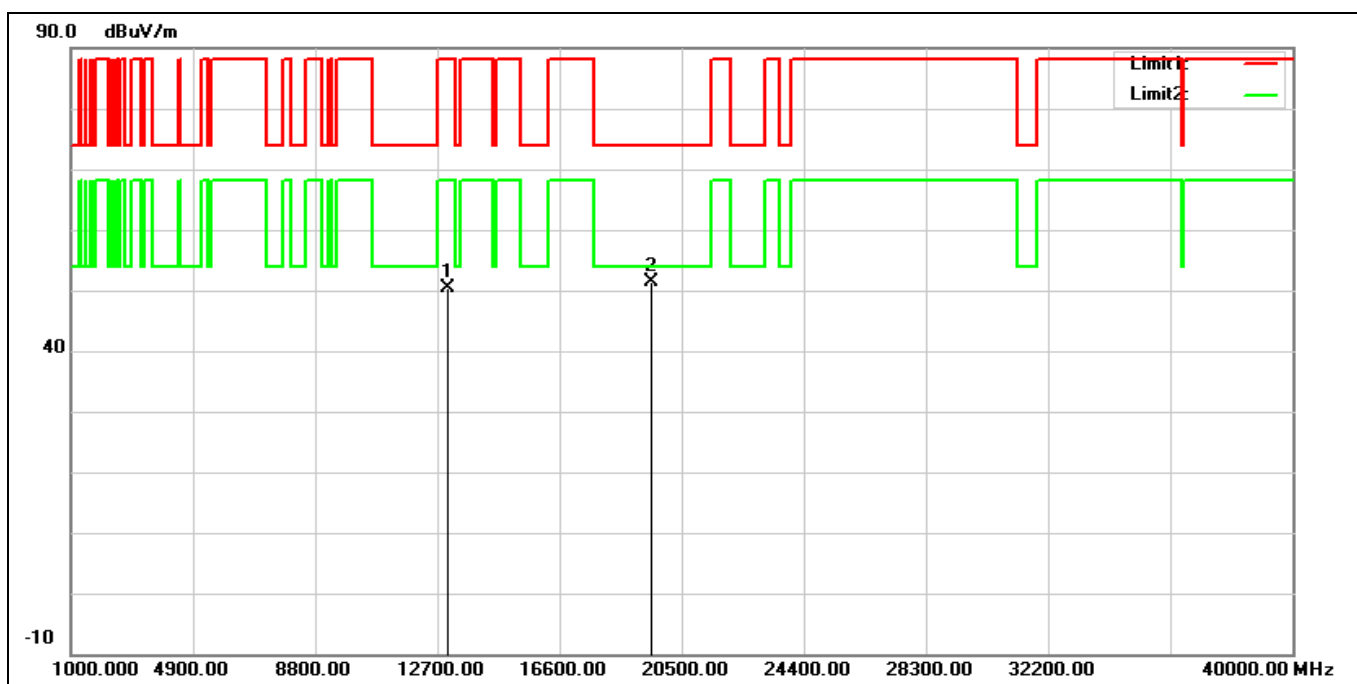


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	34.24	16.24	50.48	88.20	-37.72	peak
2*	19545.000	30.49	20.78	51.27	74.00	-22.73	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6515 MHz		
Remark:			

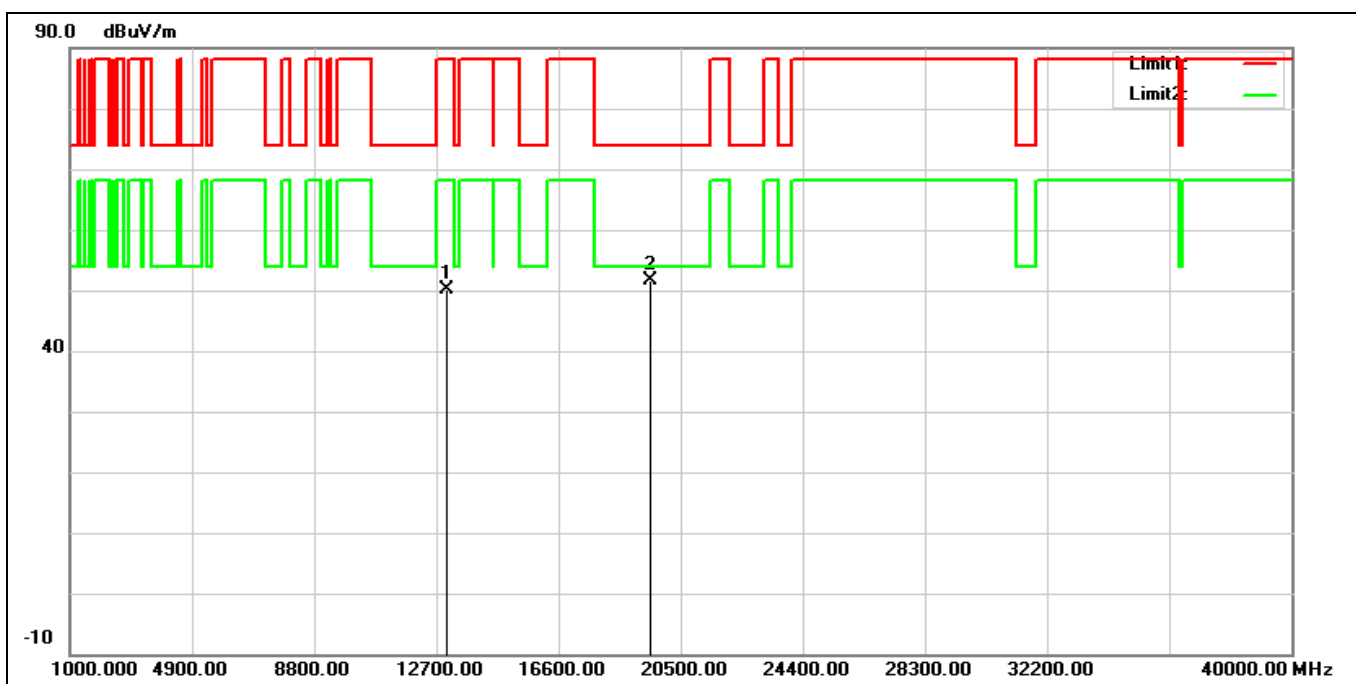


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	33.86	16.24	50.10	88.20	-38.10	peak
2*	19545.000	30.88	20.78	51.66	74.00	-22.34	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6535 MHz		
Remark:			

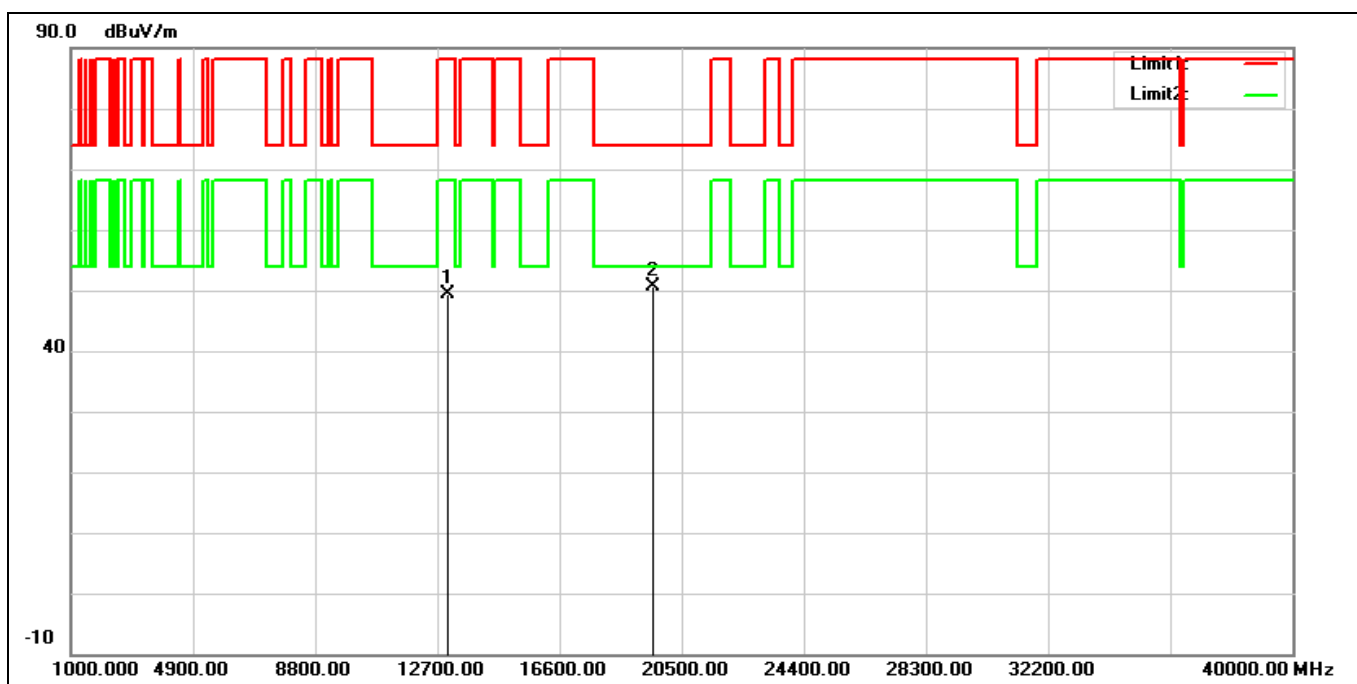


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	33.40	16.09	49.49	88.20	-38.71	peak
2*	19605.000	29.87	20.81	50.68	74.00	-23.32	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6535 MHz		
Remark:			

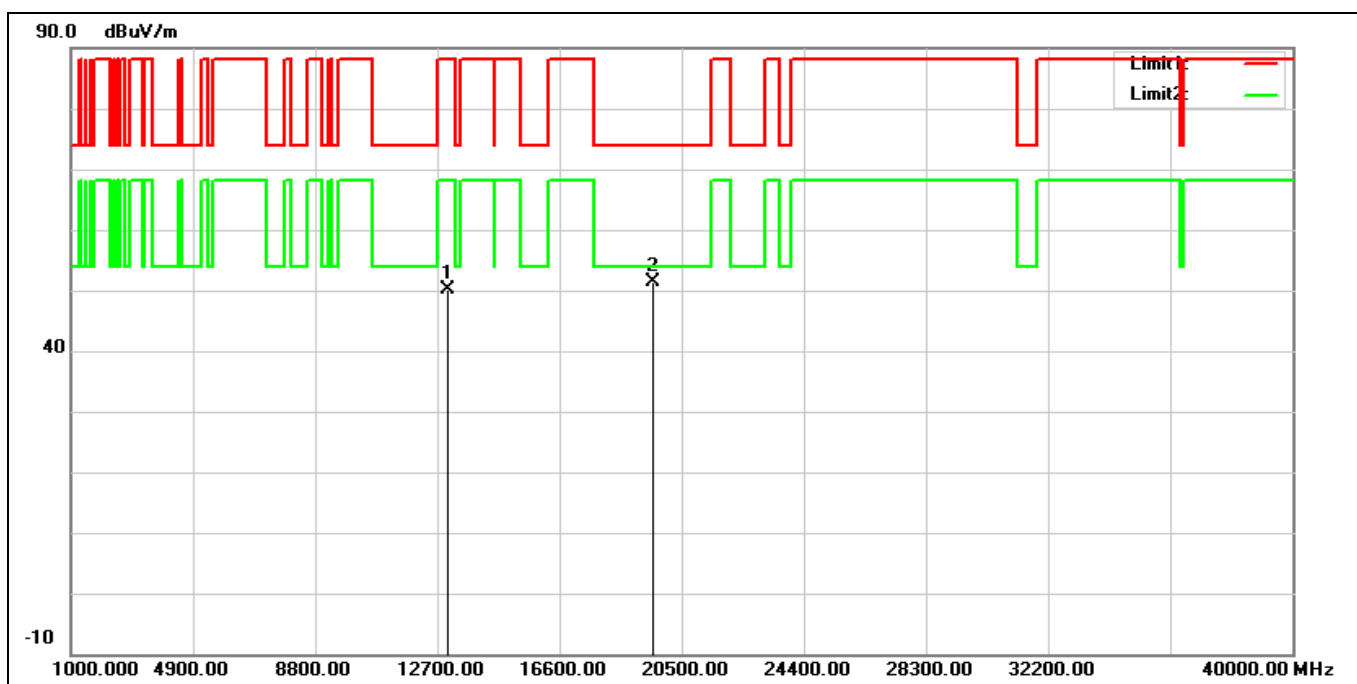


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	34.04	16.09	50.13	88.20	-38.07	peak
2*	19605.000	30.62	20.81	50.43	74.00	-22.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6695 MHz		
Remark:			

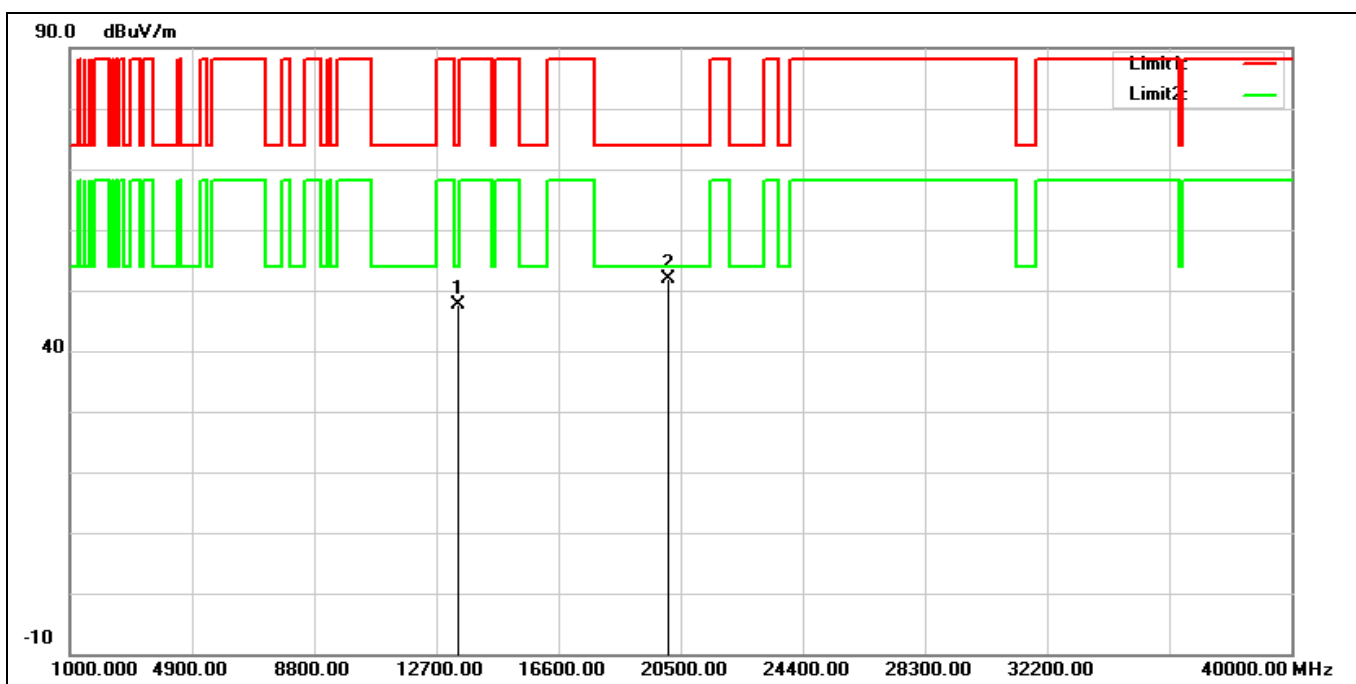


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13390.000	33.08	14.64	47.72	74.00	-26.28	peak
2*	20085.000	30.91	20.93	51.84	74.00	-22.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6695 MHz		
Remark:			

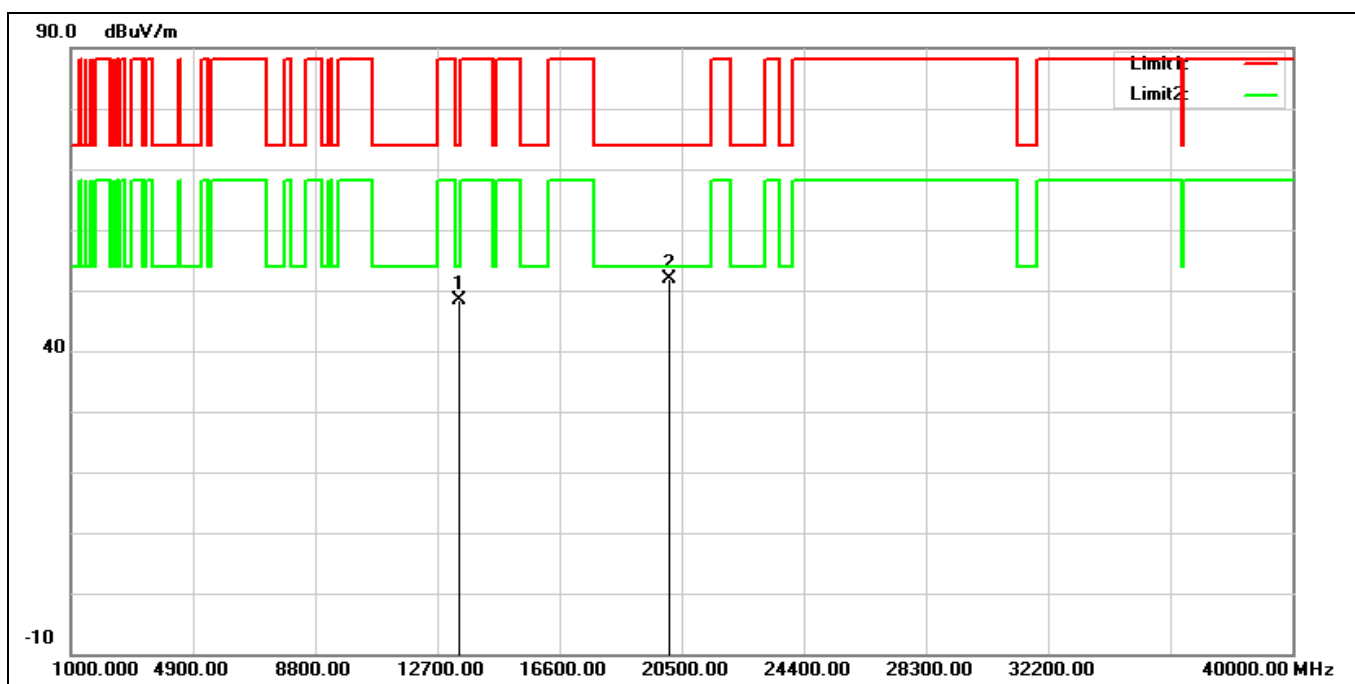


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13390.000	33.86	14.64	48.50	74.00	-25.50	peak
2*	20085.000	30.84	20.93	51.77	74.00	-22.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6855 MHz		
Remark:			

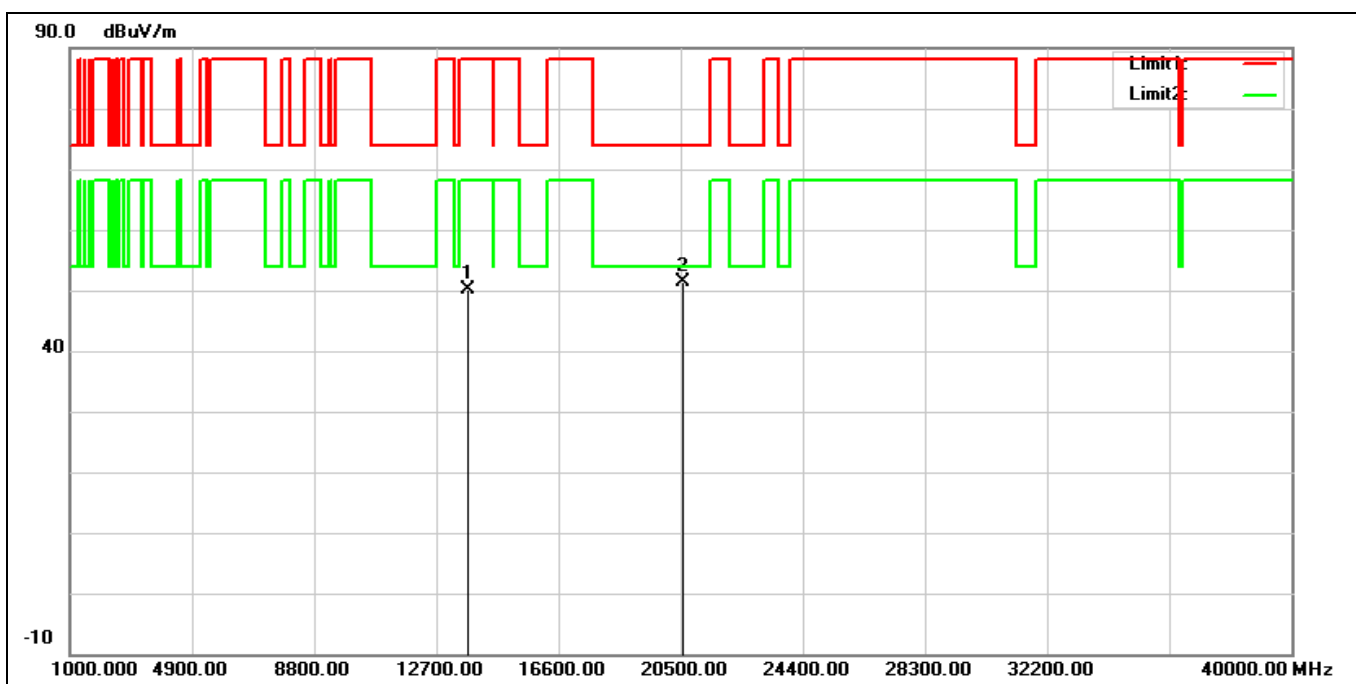


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	34.14	15.99	50.13	88.20	-38.07	peak
2*	20565.000	31.30	19.96	51.26	74.00	-22.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6855 MHz		
Remark:			

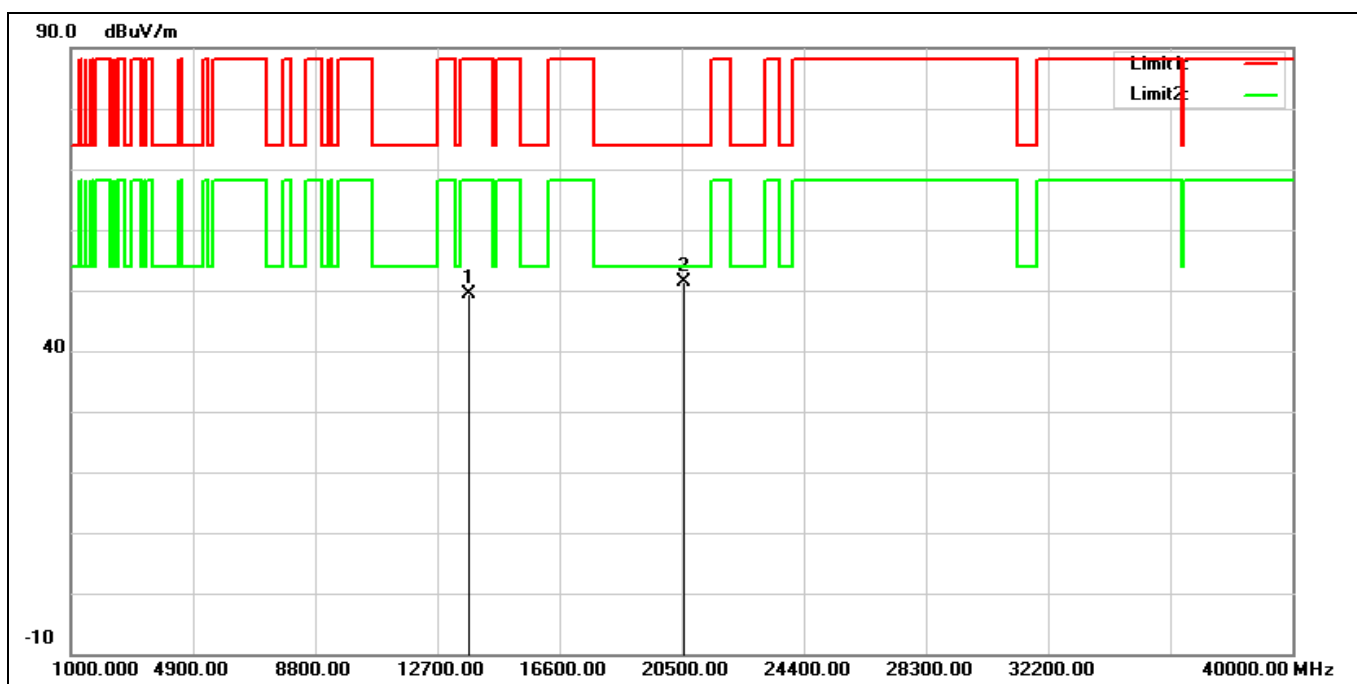


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	33.44	15.99	49.43	88.20	-38.77	peak
2*	20565.000	31.53	19.96	51.49	74.00	-22.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6875 MHz		
Remark:			

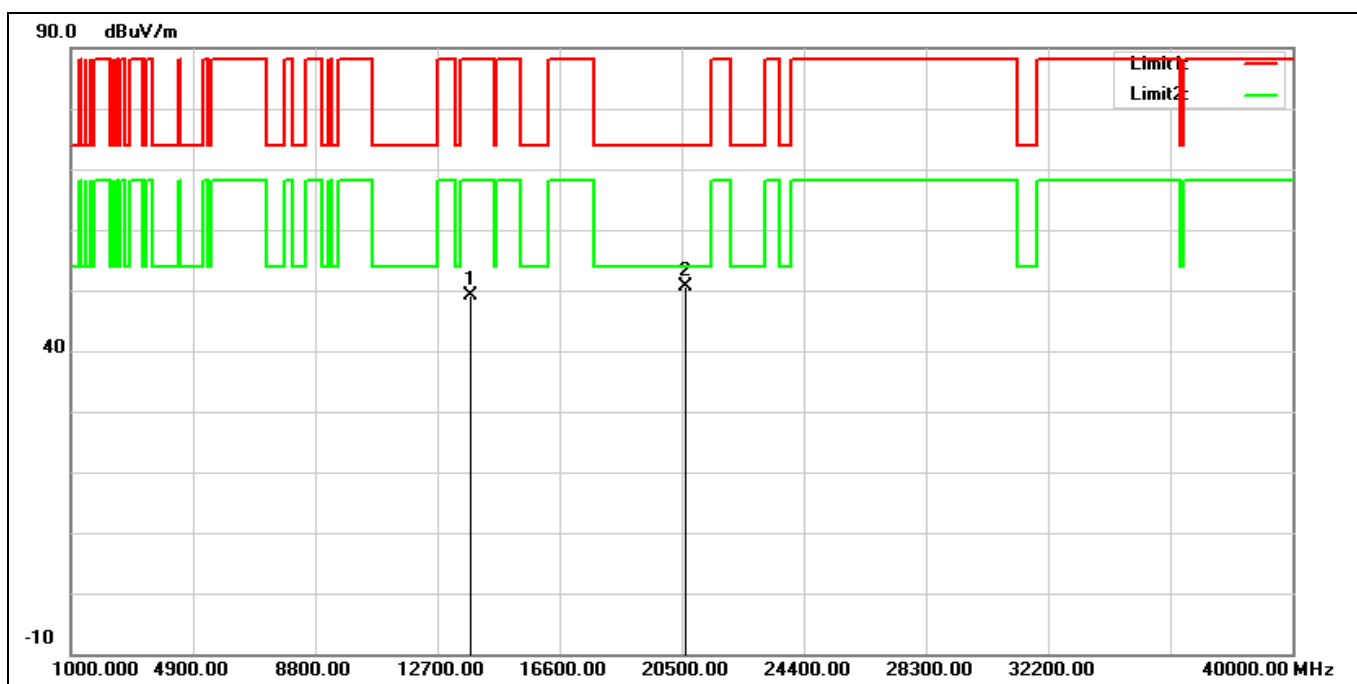


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	32.91	16.11	49.02	88.20	-39.18	peak
2*	20625.000	30.62	20.09	50.71	74.00	-23.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6875 MHz		
Remark:			

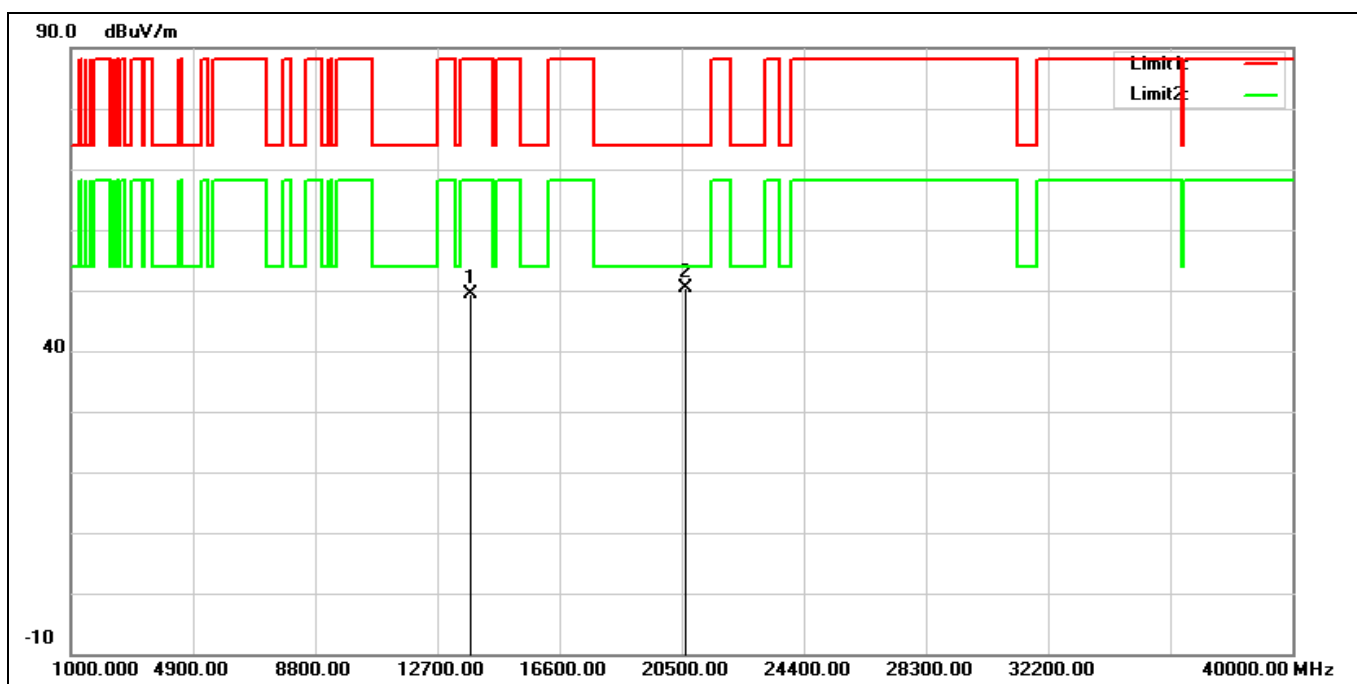


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	33.37	16.11	49.48	88.20	-38.72	peak
2*	20625.000	30.39	20.09	50.48	74.00	-23.52	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6895 MHz		
Remark:			

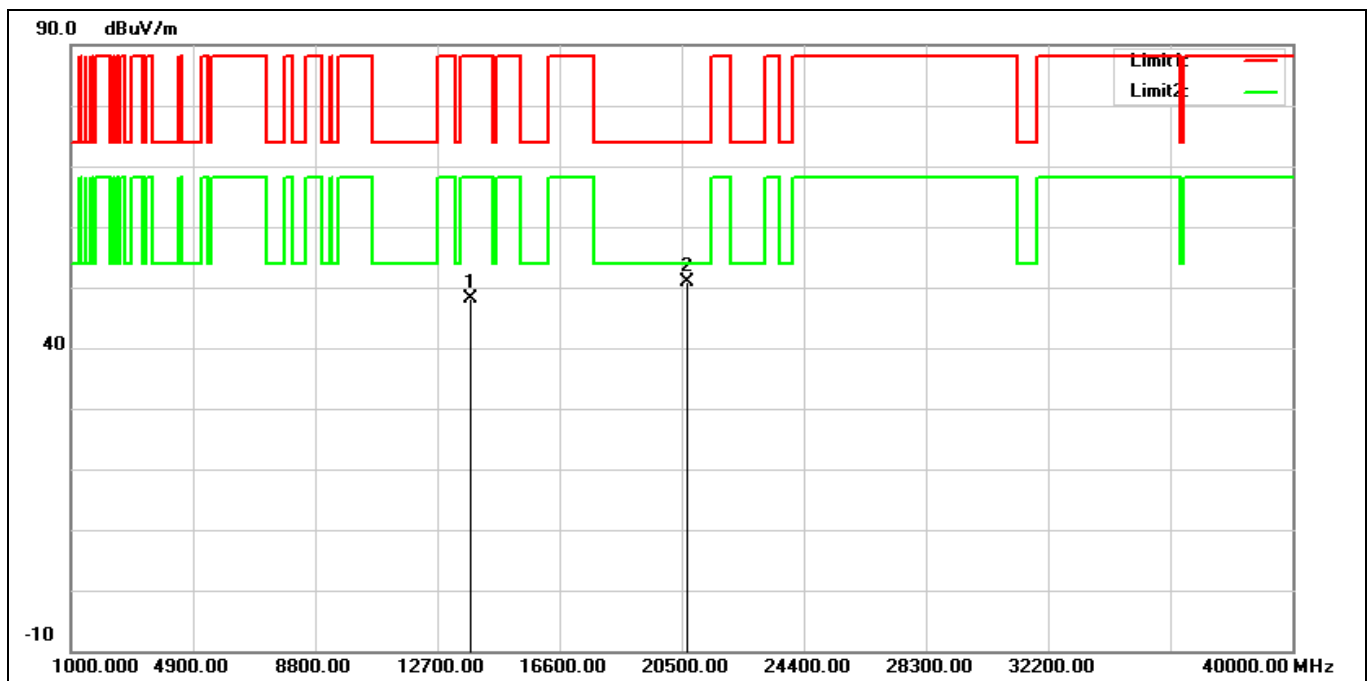


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	32.01	16.22	48.23	88.20	-39.97	peak
2*	20685.000	30.63	20.24	50.87	74.00	-23.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6895 MHz		
Remark:			

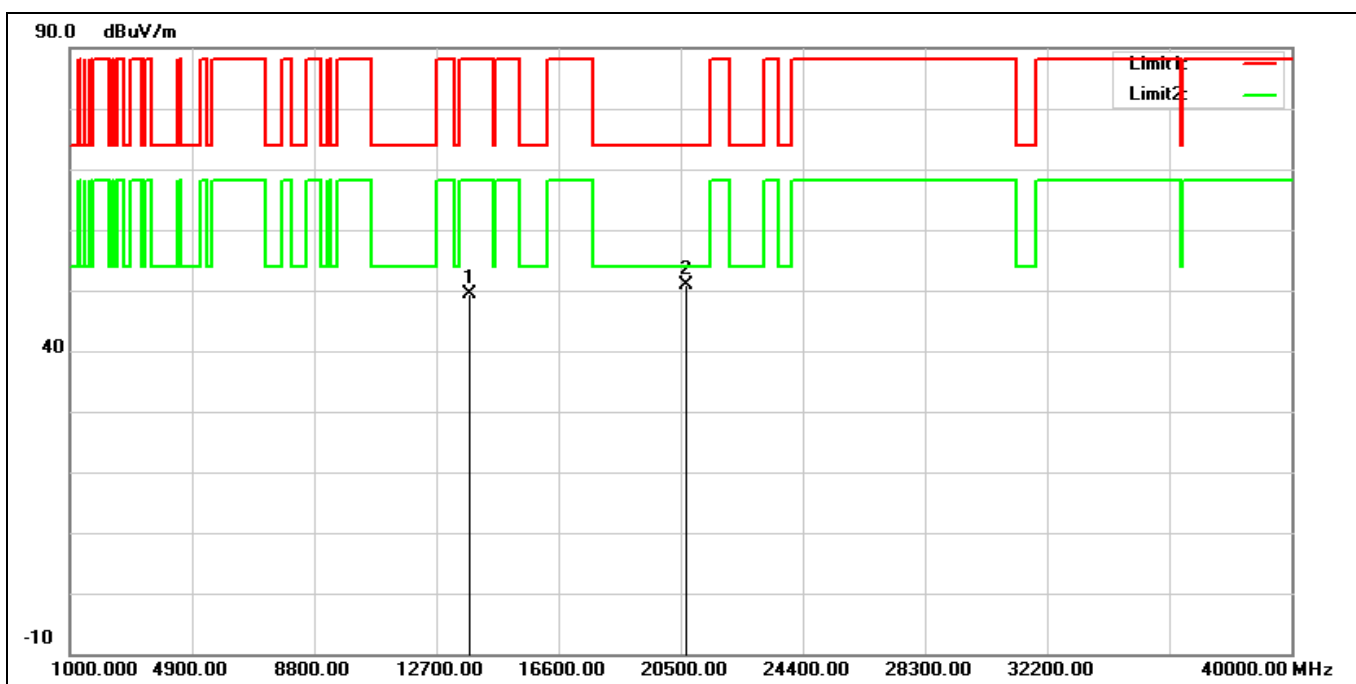


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	33.27	16.22	49.49	88.20	-38.71	peak
2*	20685.000	30.65	20.24	50.89	74.00	-23.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6995 MHz		
Remark:			

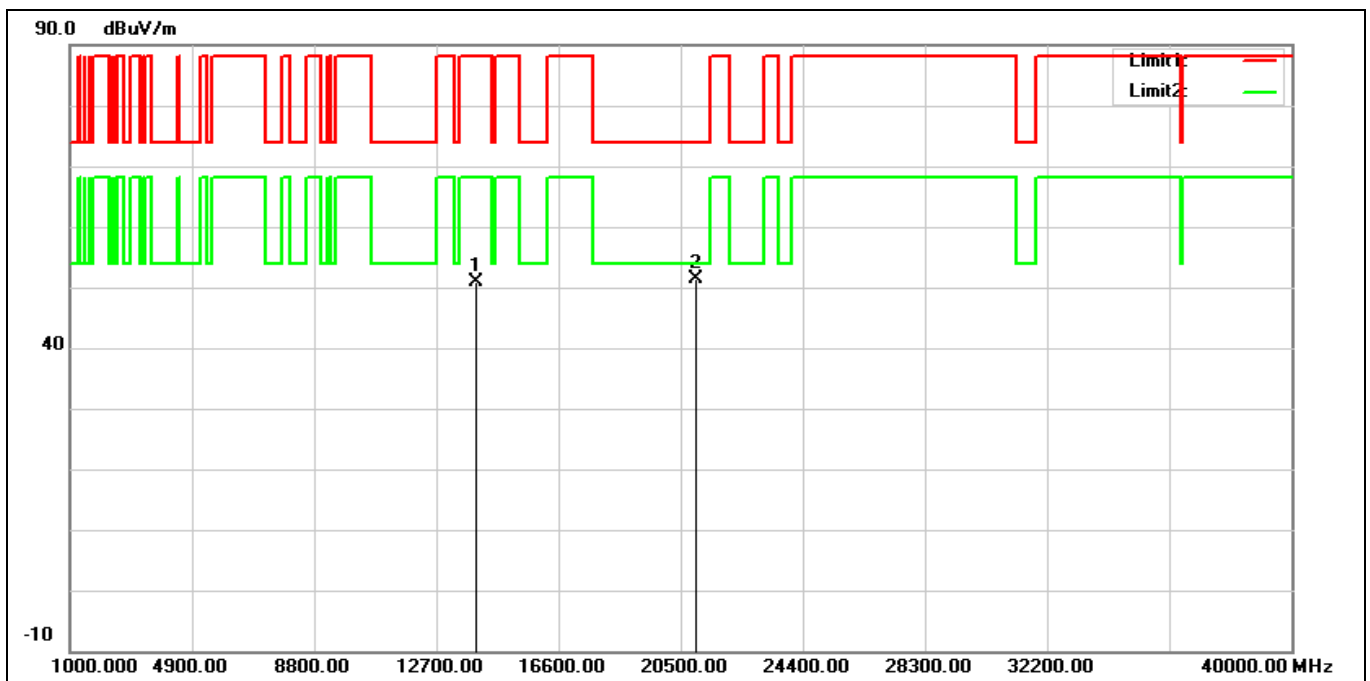


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	32.82	17.99	50.81	88.20	-37.39	peak
2*	20985.000	30.35	20.94	51.29	74.00	-22.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6995 MHz		
Remark:			

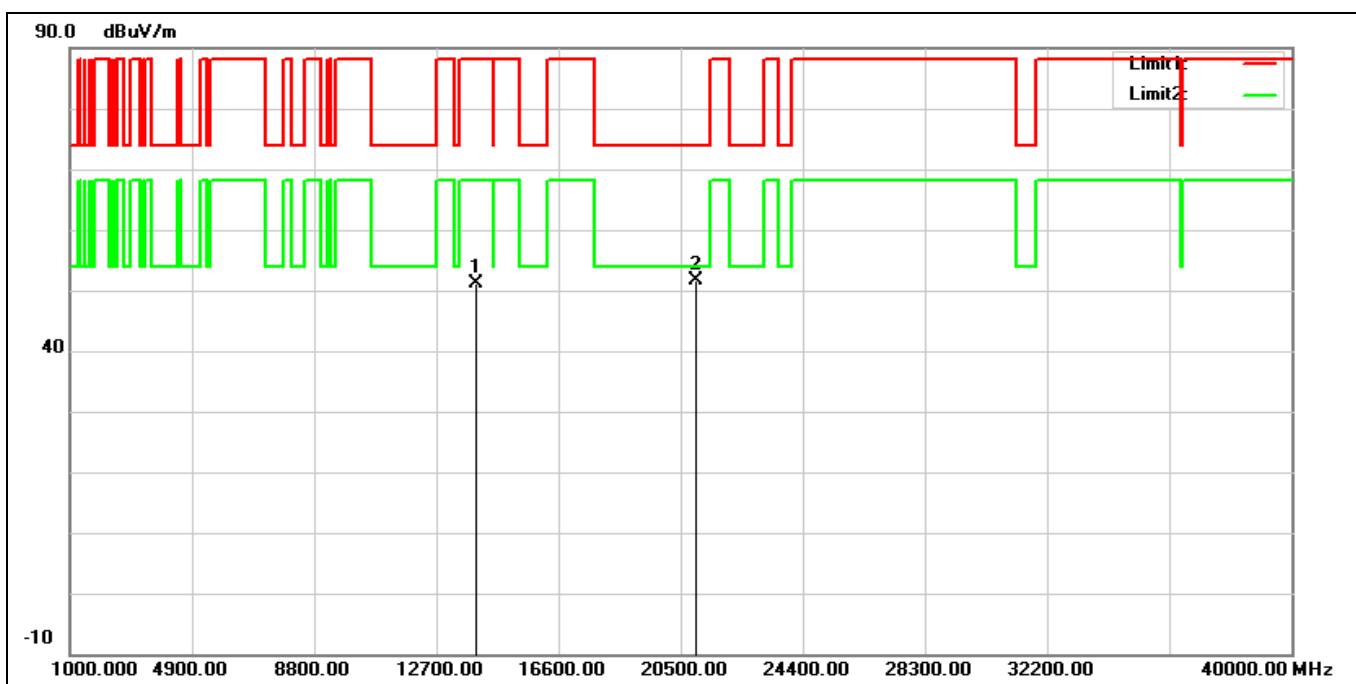


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	33.12	17.99	51.11	88.20	-37.09	peak
2*	20985.000	30.61	20.94	51.55	74.00	-22.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

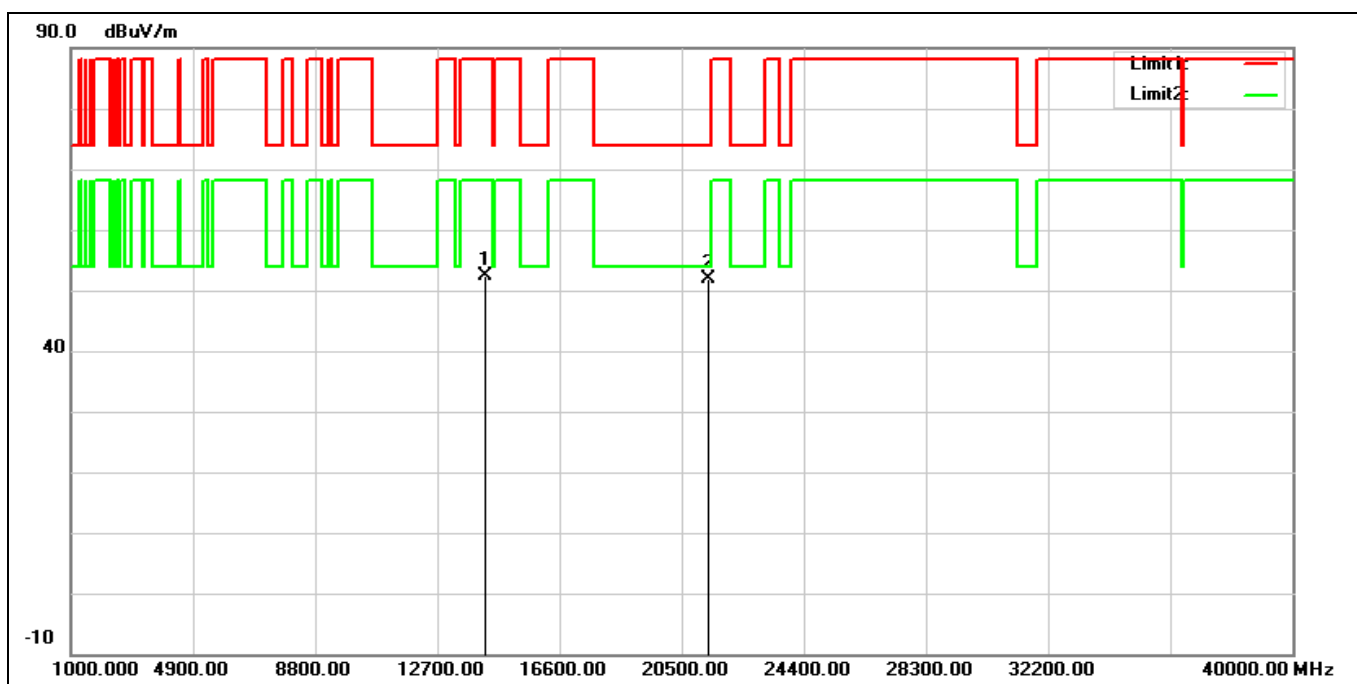


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	33.82	18.58	52.40	88.20	-35.80	peak
2*	21345.000	31.71	20.26	51.97	74.00	-22.03	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

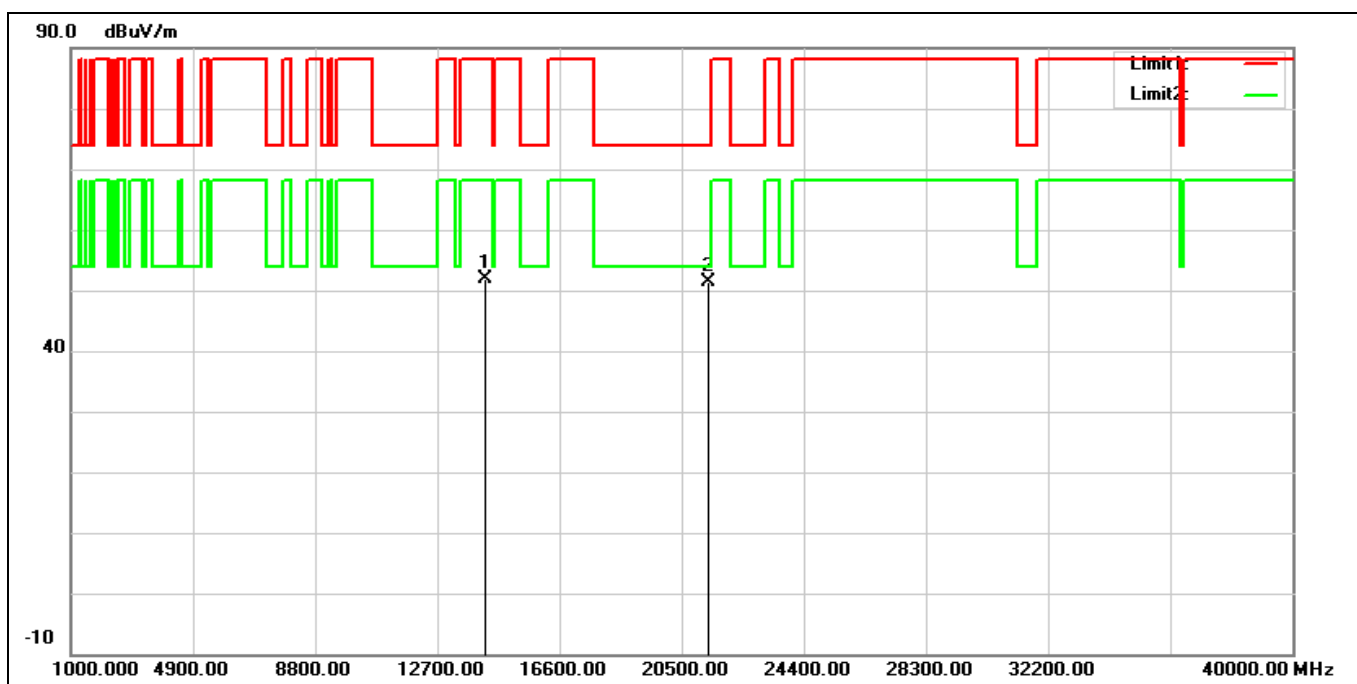


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	33.28	18.58	51.86	88.20	-36.34	peak
2*	21345.000	31.02	20.26	51.28	74.00	-22.72	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 5965 MHz
Remark:

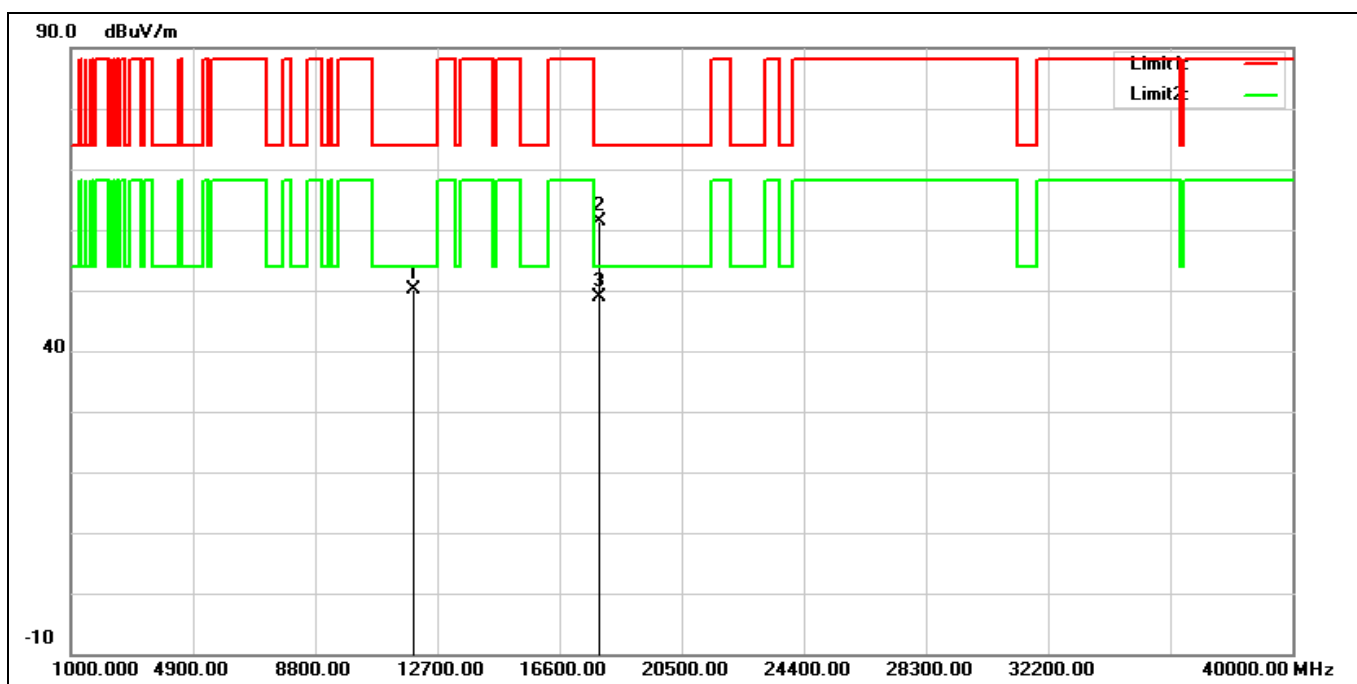


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	36.01	14.03	50.04	74.00	-23.96	peak
2	17895.000	33.29	28.12	61.41	74.00	-12.59	peak
3*	17895.000	20.65	28.12	48.77	54.00	-5.23	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

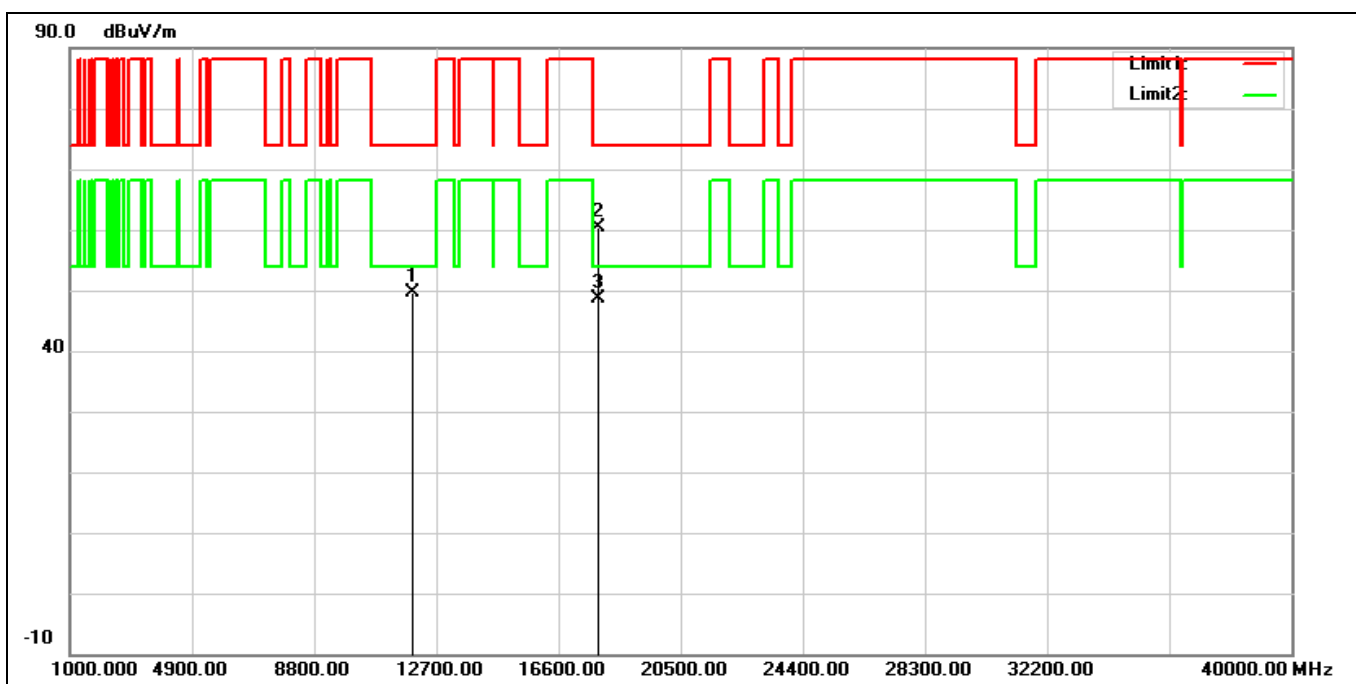


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	35.66	14.03	49.69	74.00	-24.31	peak
2	17895.000	32.20	28.12	60.32	74.00	-13.68	peak
3*	17895.000	20.55	28.12	48.67	54.00	-5.33	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6165 MHz		
Remark:			

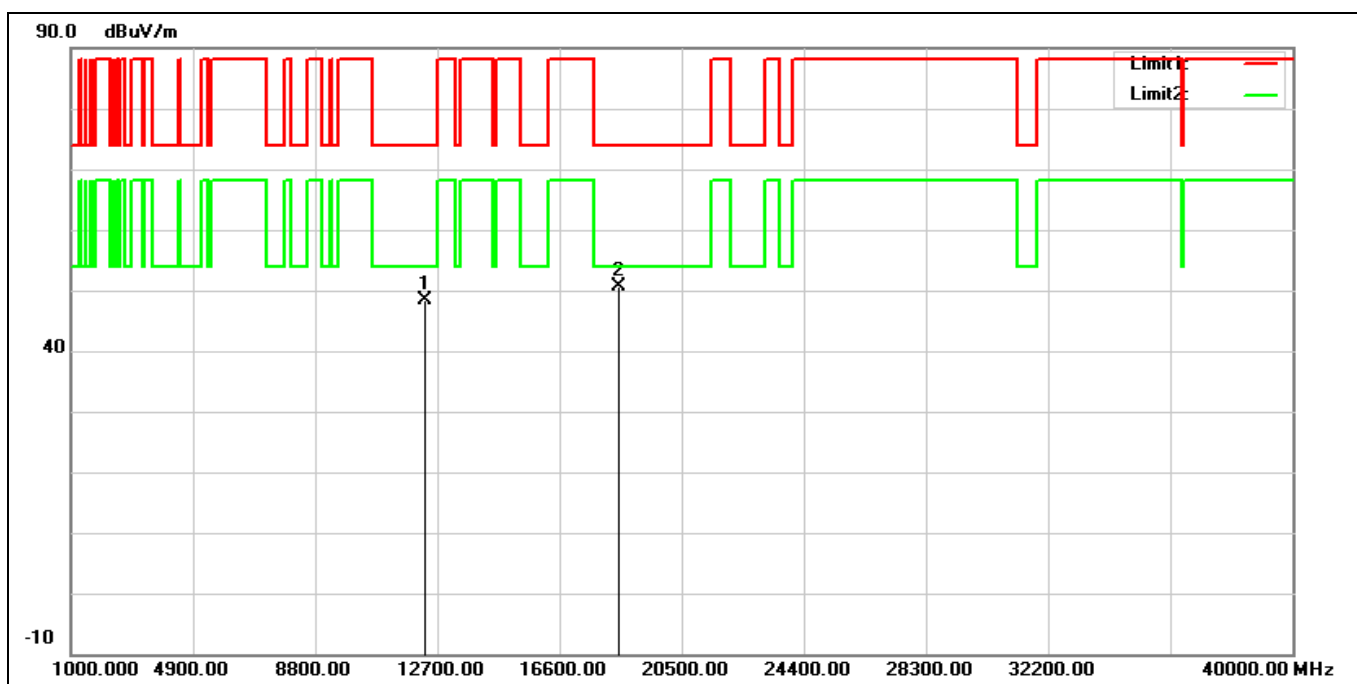


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12330.000	33.99	14.34	48.33	74.00	-25.67	peak
2*	18495.000	31.96	18.59	50.55	74.00	-23.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6165 MHz		
Remark:			

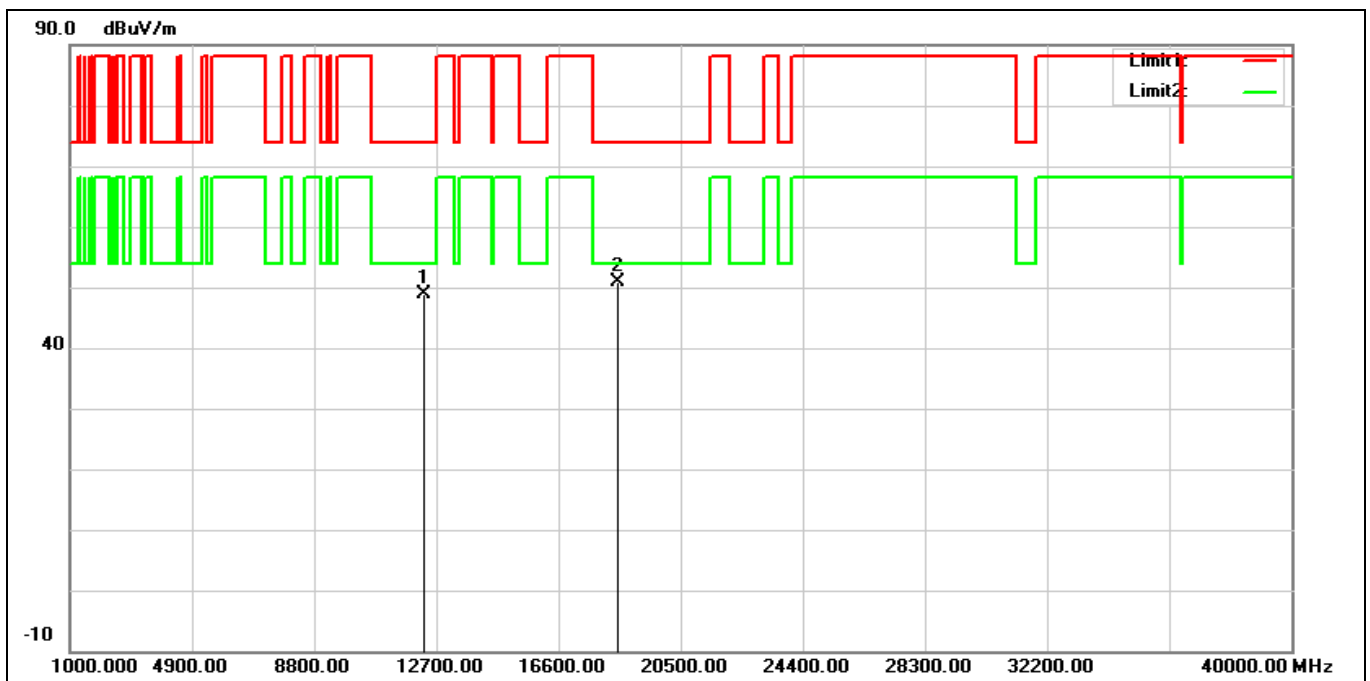


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12330.000	34.66	14.34	49.00	74.00	-25.00	peak
2*	18495.000	32.37	18.59	50.96	74.00	-23.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6405 MHz		
Remark:			

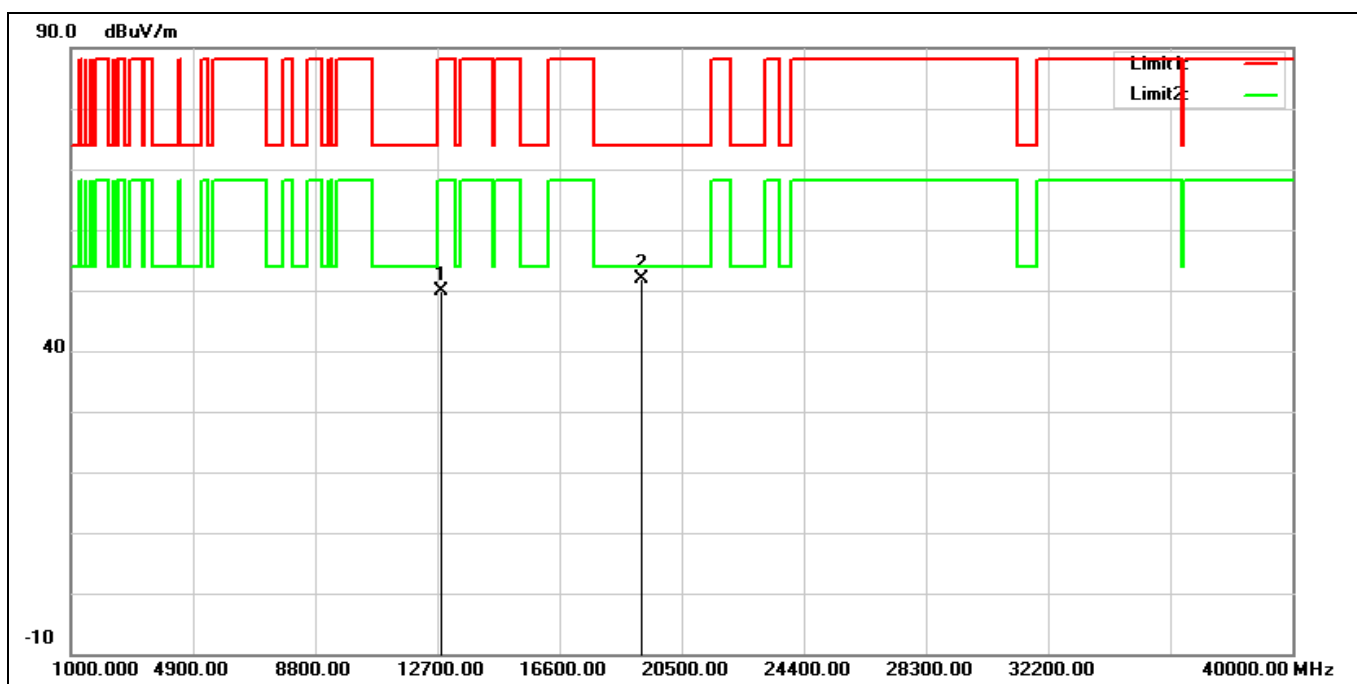


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	34.07	15.92	49.99	88.20	-38.21	peak
2*	19215.000	31.71	20.07	51.78	74.00	-22.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6405 MHz		
Remark:			

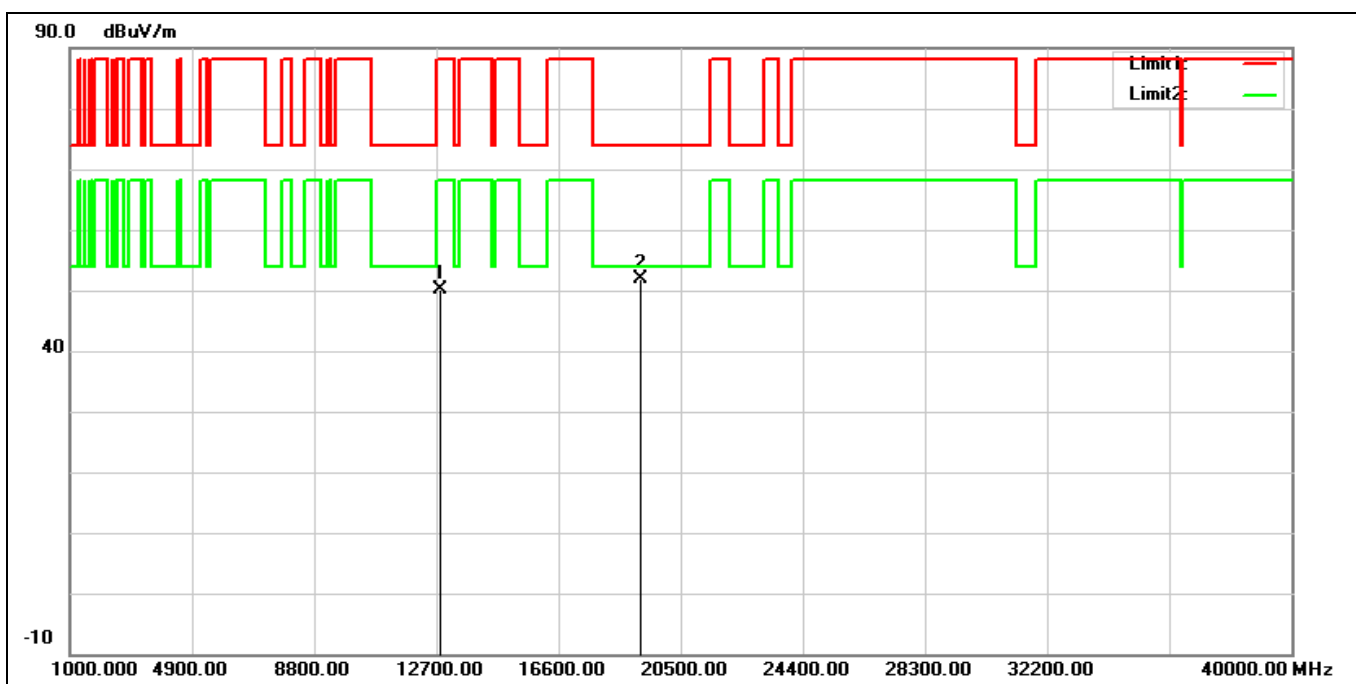


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	34.18	15.92	50.10	88.20	-38.10	peak
2*	19215.000	31.88	20.07	51.95	74.00	-22.05	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6445 MHz		
Remark:			

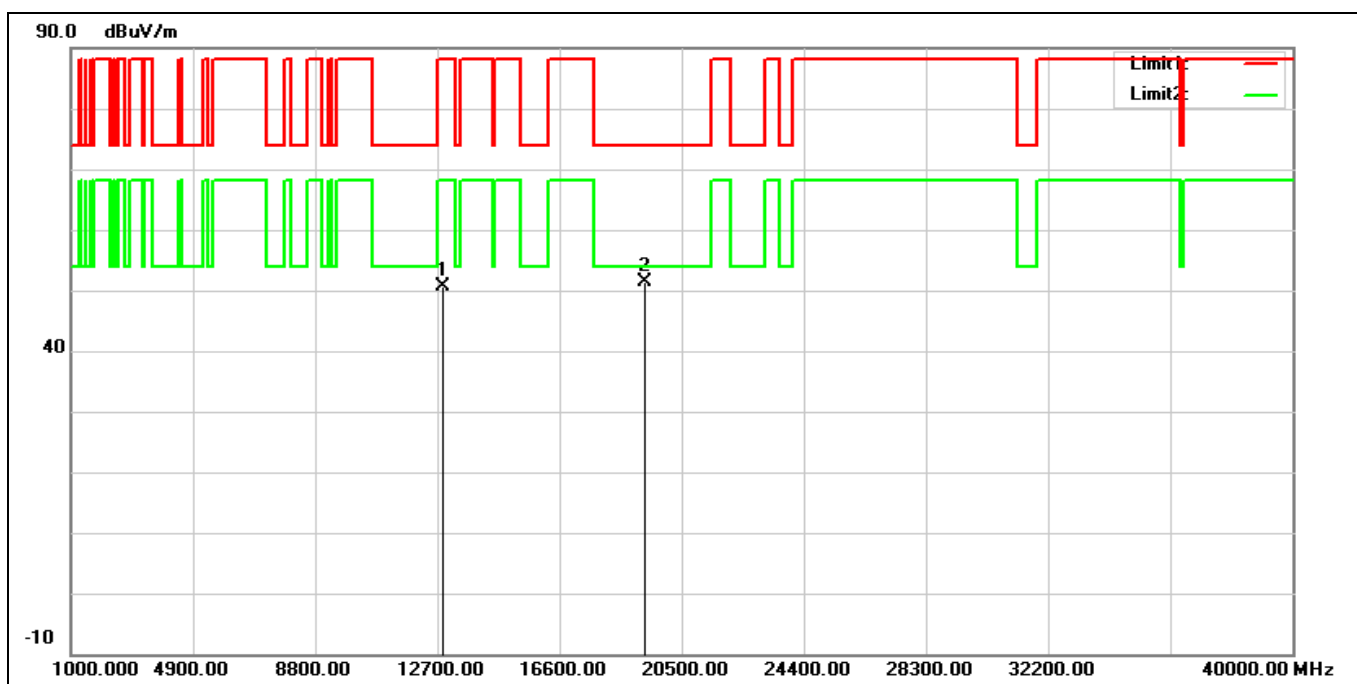


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	34.43	16.11	50.54	88.20	-37.66	peak
2*	19335.000	31.14	20.35	51.49	74.00	-22.51	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6445 MHz		
Remark:			

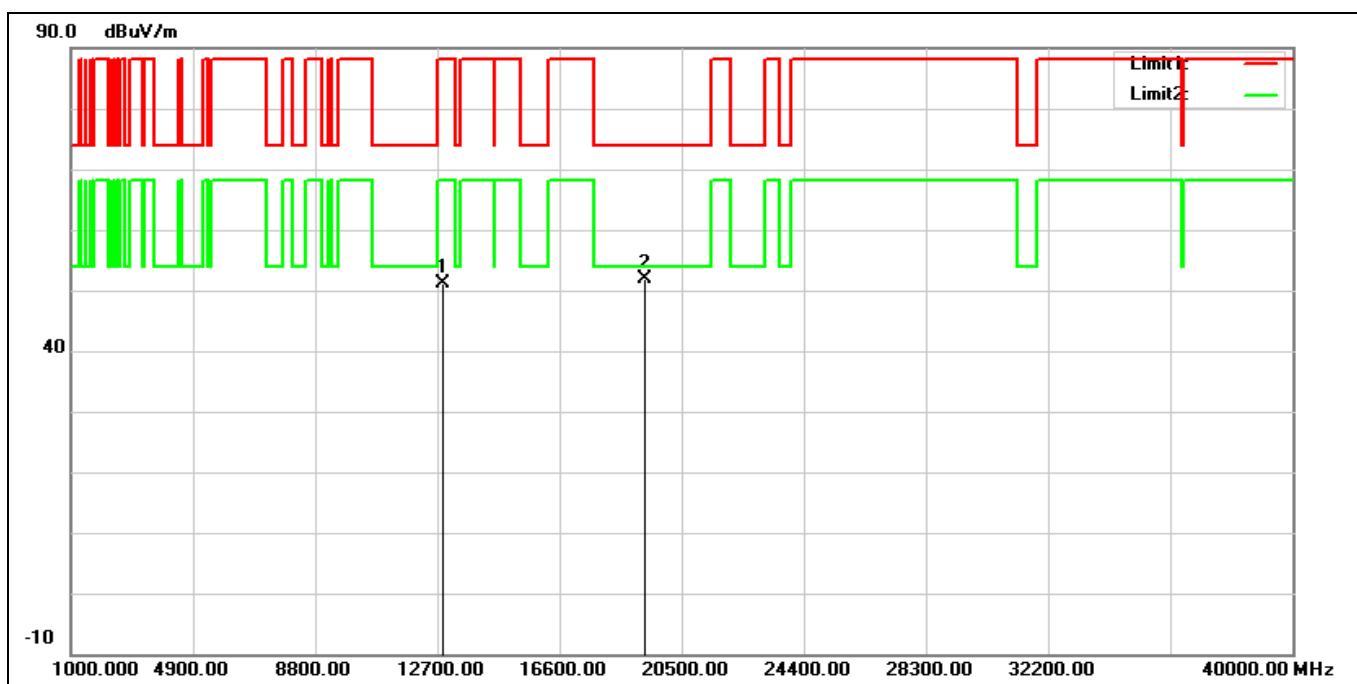


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	35.10	16.11	51.21	88.20	-36.99	peak
2*	19335.000	31.44	20.35	51.79	74.00	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6485 MHz		
Remark:			

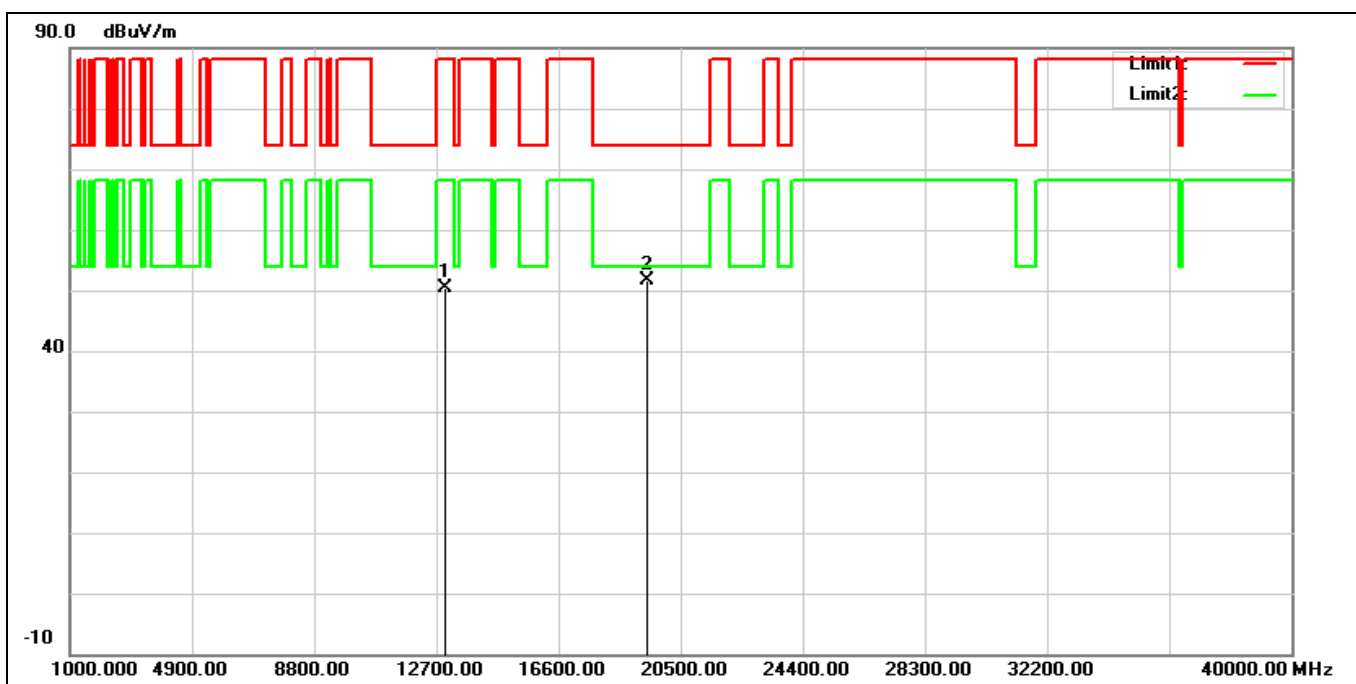


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	34.12	16.37	50.49	88.20	-37.71	peak
2*	19455.000	30.89	20.64	51.53	74.00	-22.47	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT40 6485 MHz
Remark:

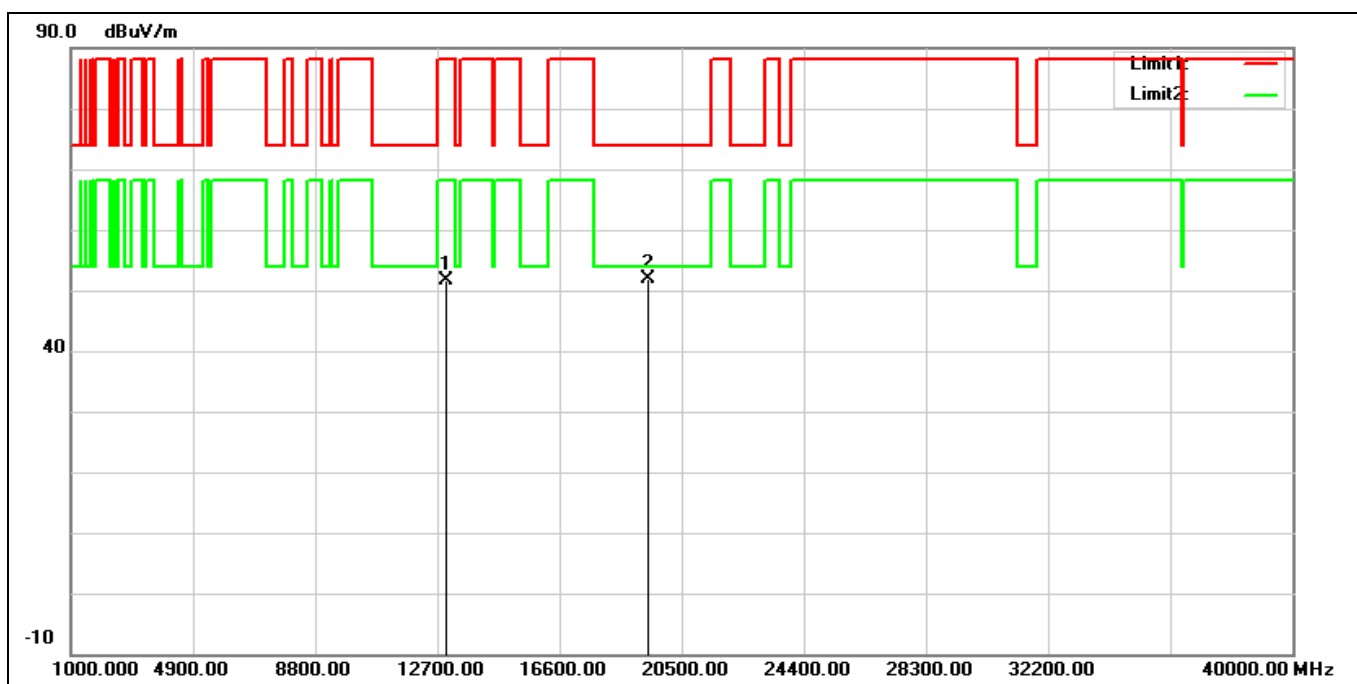


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	35.20	16.37	51.57	88.20	-36.63	peak
2*	19455.000	31.30	20.64	51.94	74.00	-22.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6525 MHz		
Remark:			

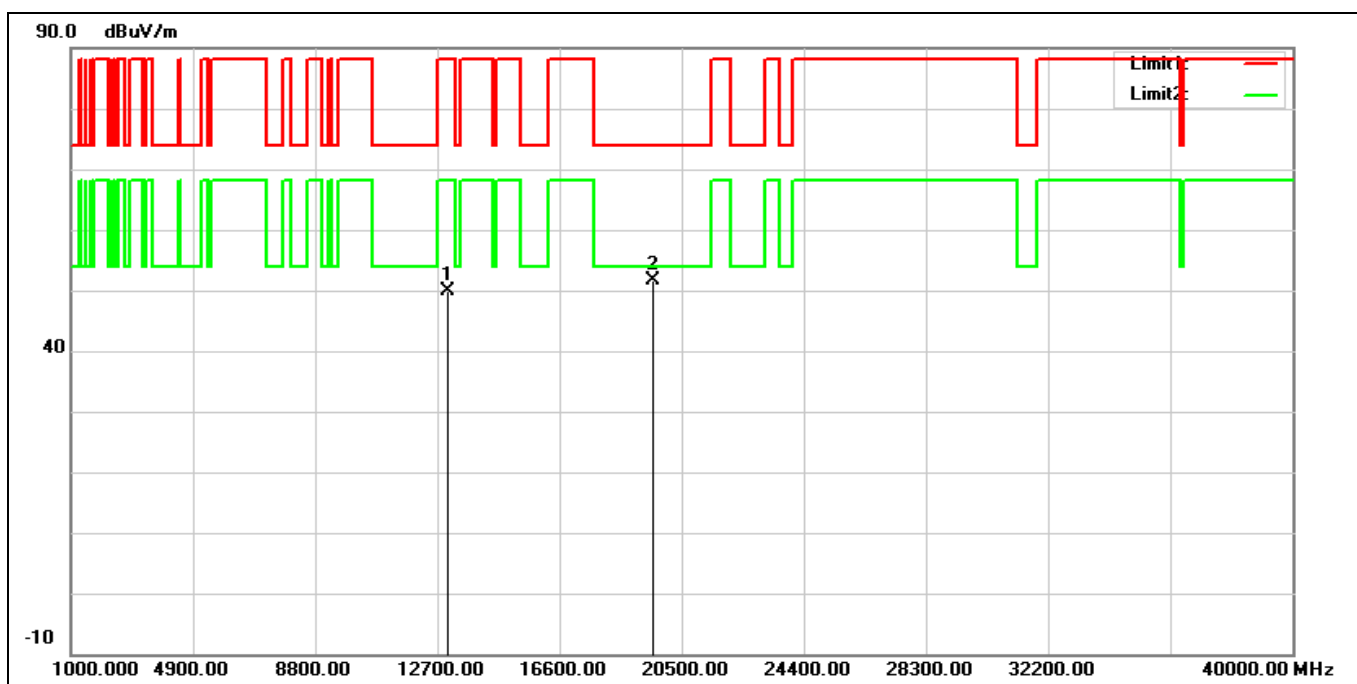


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	33.90	16.09	49.99	88.20	-38.21	peak
2*	19575.000	30.70	20.81	51.51	74.00	-22.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6525 MHz		
Remark:			

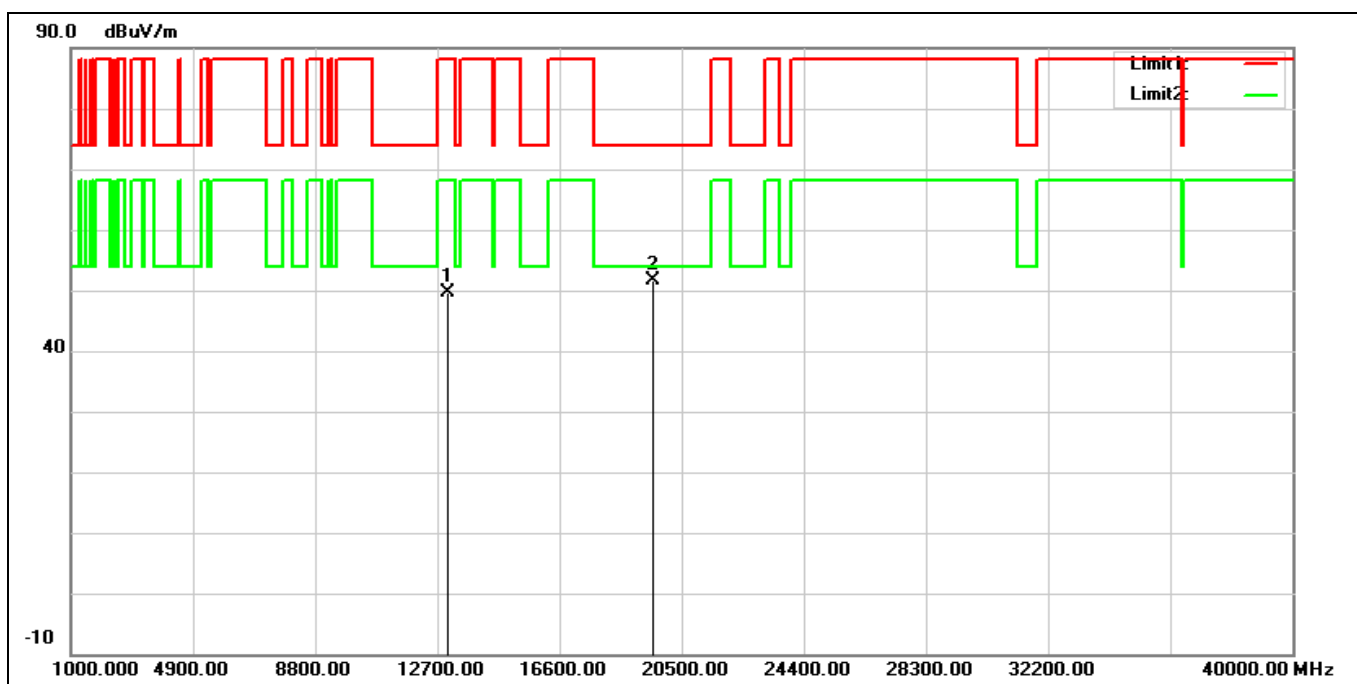


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	33.65	16.09	49.74	88.20	-38.46	peak
2*	19575.000	30.90	20.81	51.71	74.00	-22.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6565 MHz		
Remark:			

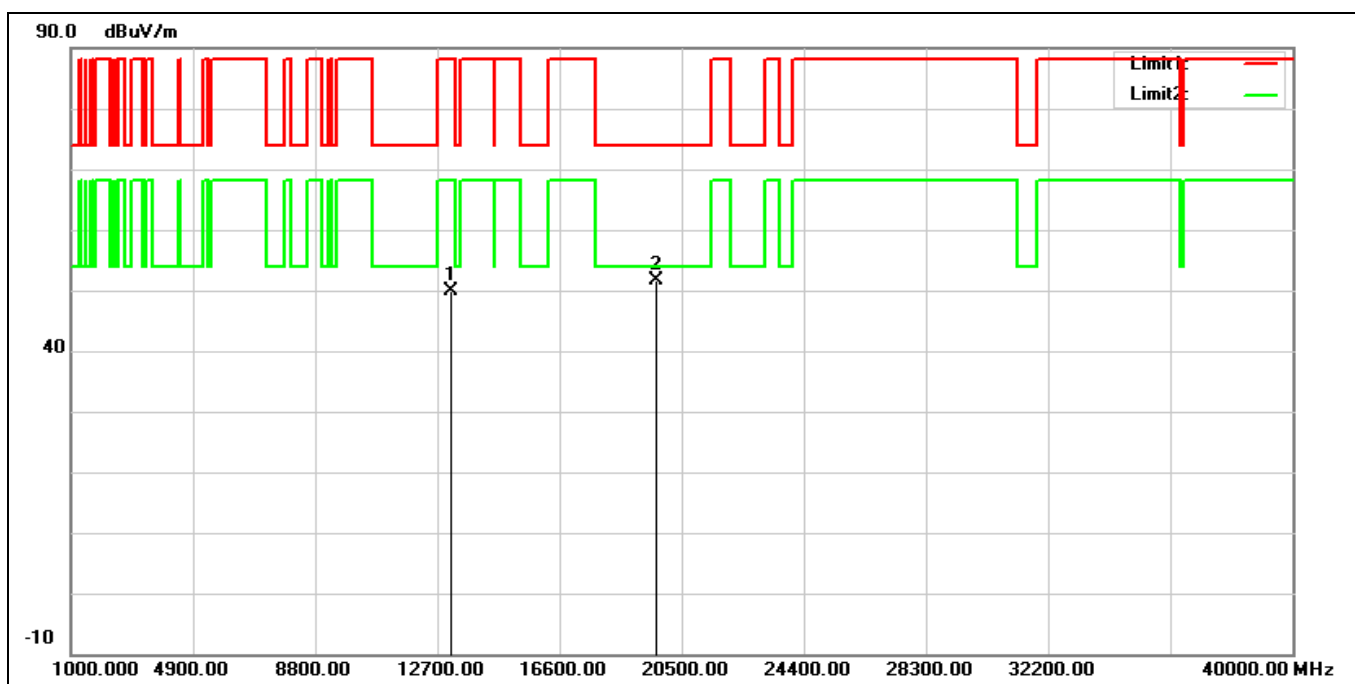


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	34.32	15.57	49.89	88.20	-38.31	peak
2*	19695.000	30.73	20.91	51.64	74.00	-22.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6565 MHz		
Remark:			

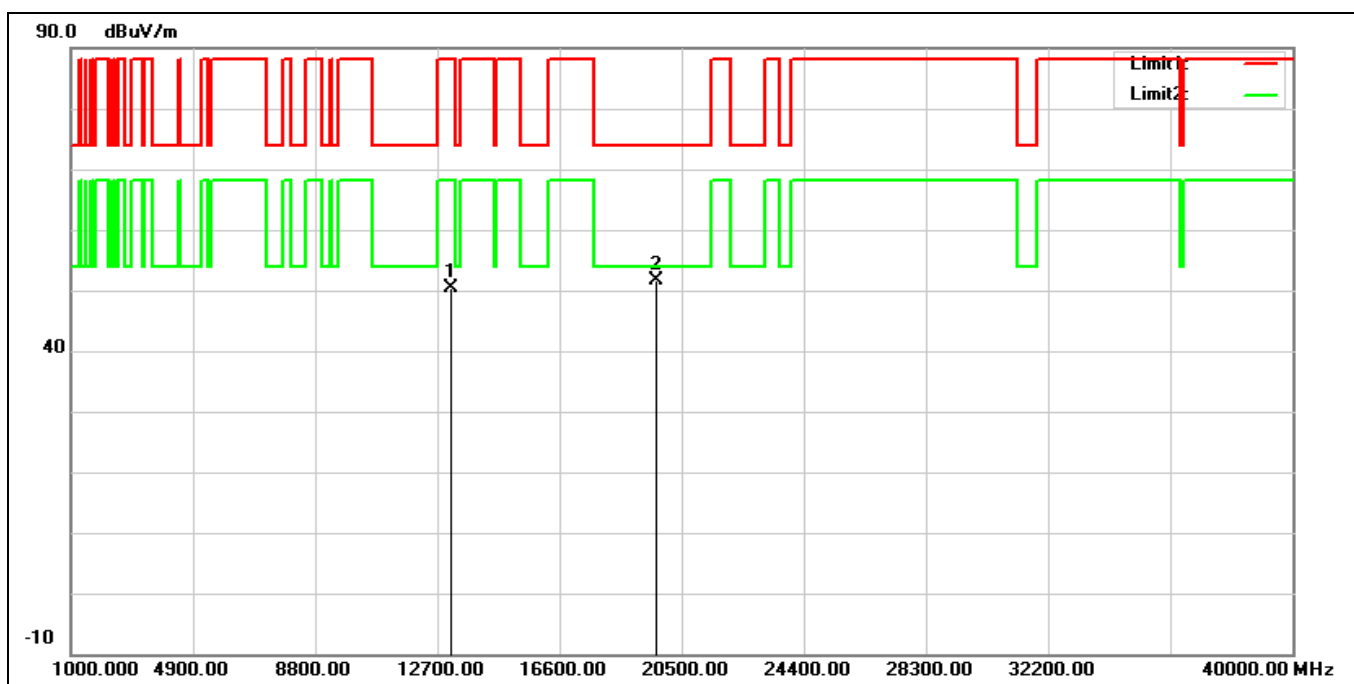


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	34.76	15.57	50.33	88.20	-37.87	peak
2*	19695.000	30.79	20.91	51.70	74.00	-22.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6685 MHz		
Remark:			

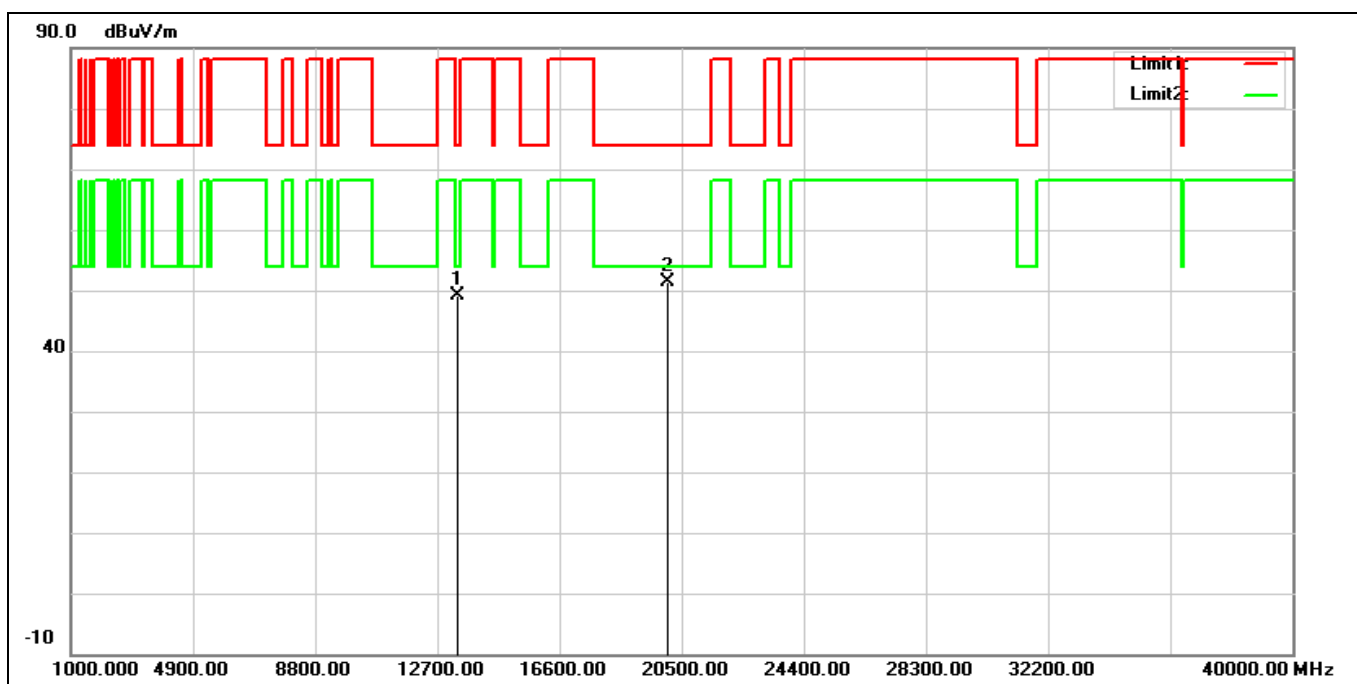


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13370.000	34.45	14.67	49.12	74.00	-24.88	peak
2*	20055.000	30.38	21.01	51.39	74.00	-22.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6685 MHz		
Remark:			

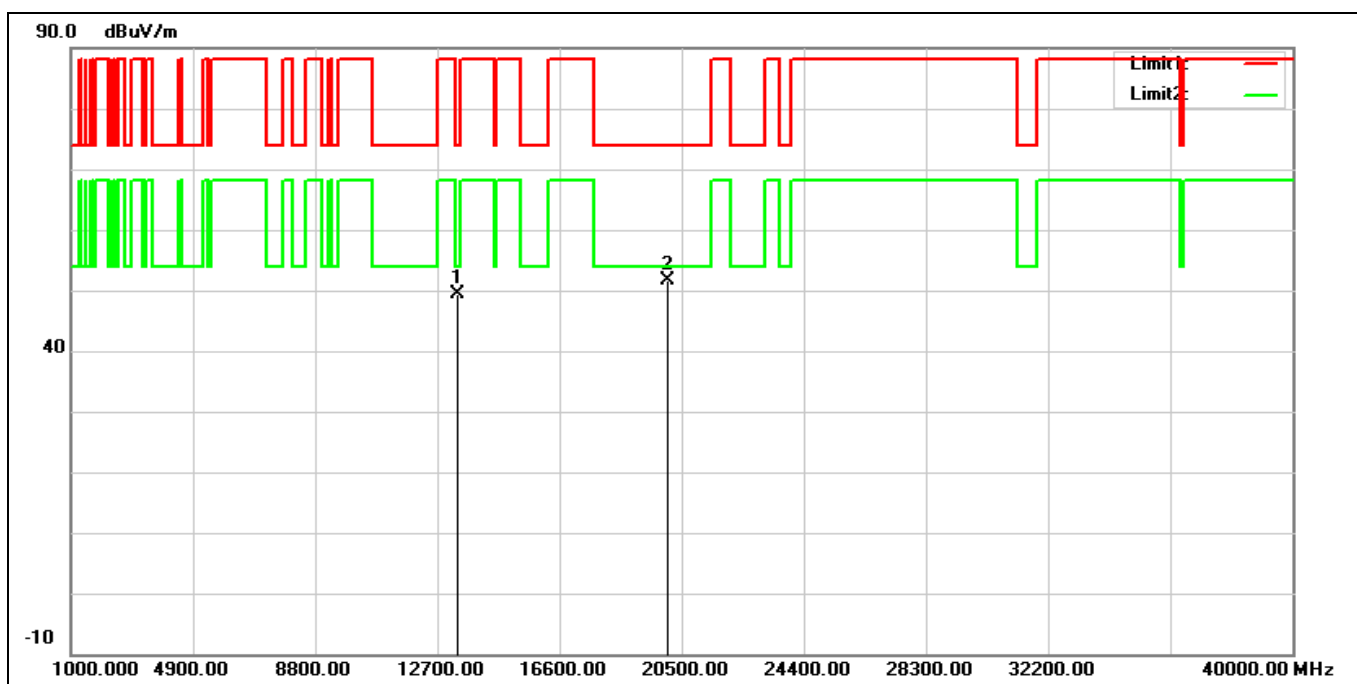


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13370.000	34.61	14.67	49.28	74.00	-24.72	peak
2*	20055.000	30.74	21.01	51.75	74.00	-22.25	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 6845 MHz
Remark:

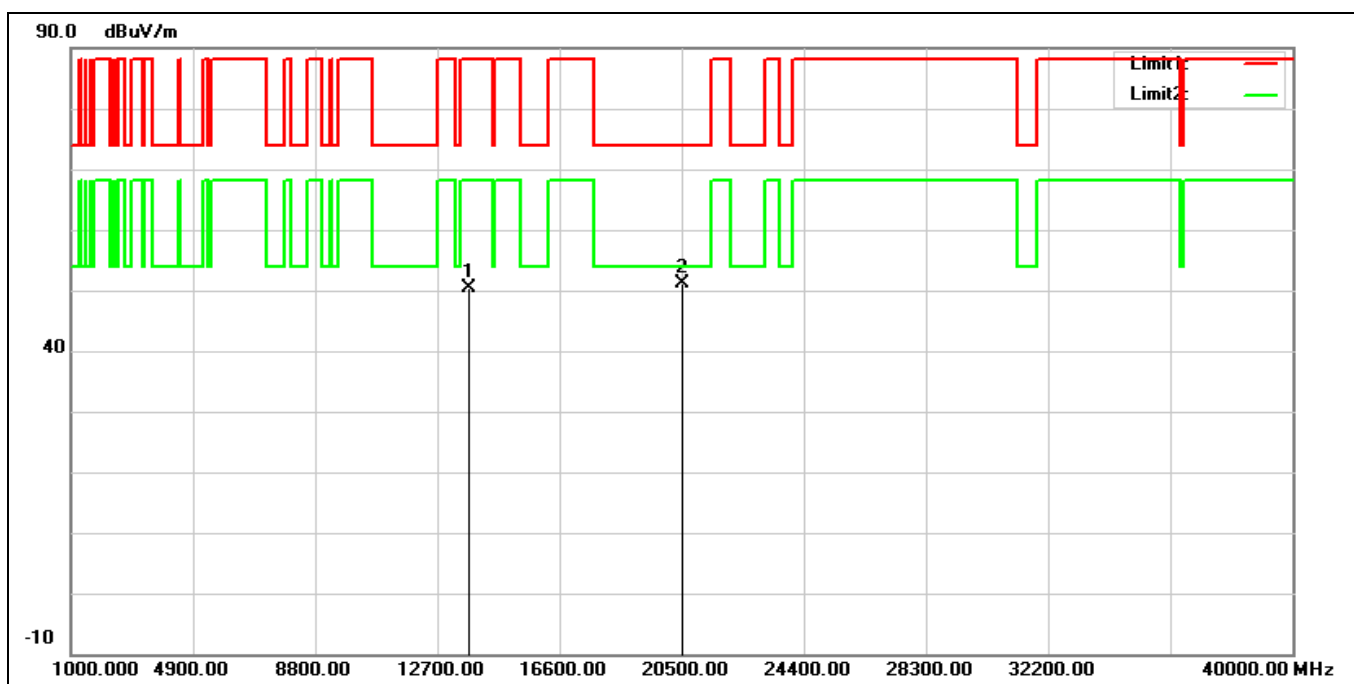


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	34.50	15.87	50.37	88.20	-37.83	peak
2*	20535.000	31.35	19.88	51.23	74.00	-22.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6845 MHz		
Remark:			

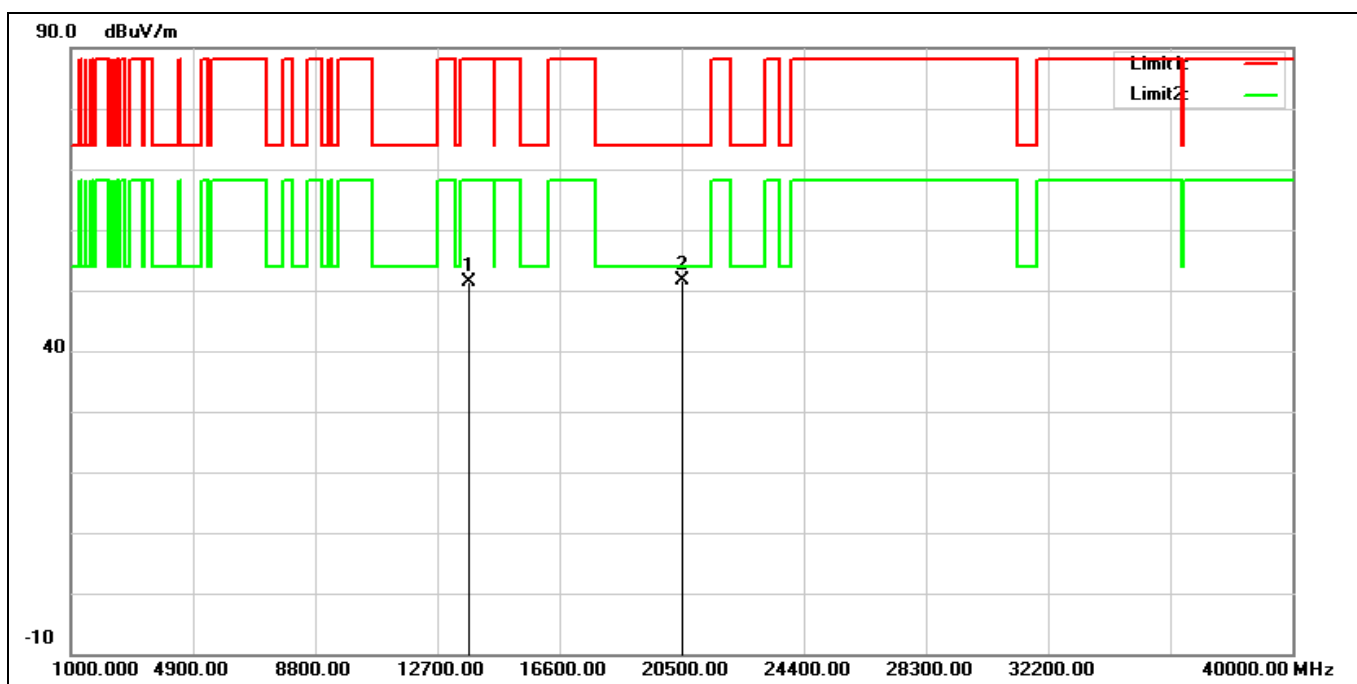


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	35.45	15.87	51.32	88.20	-36.88	peak
2*	20535.000	31.70	19.88	51.58	74.00	-22.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6885 MHz		
Remark:			

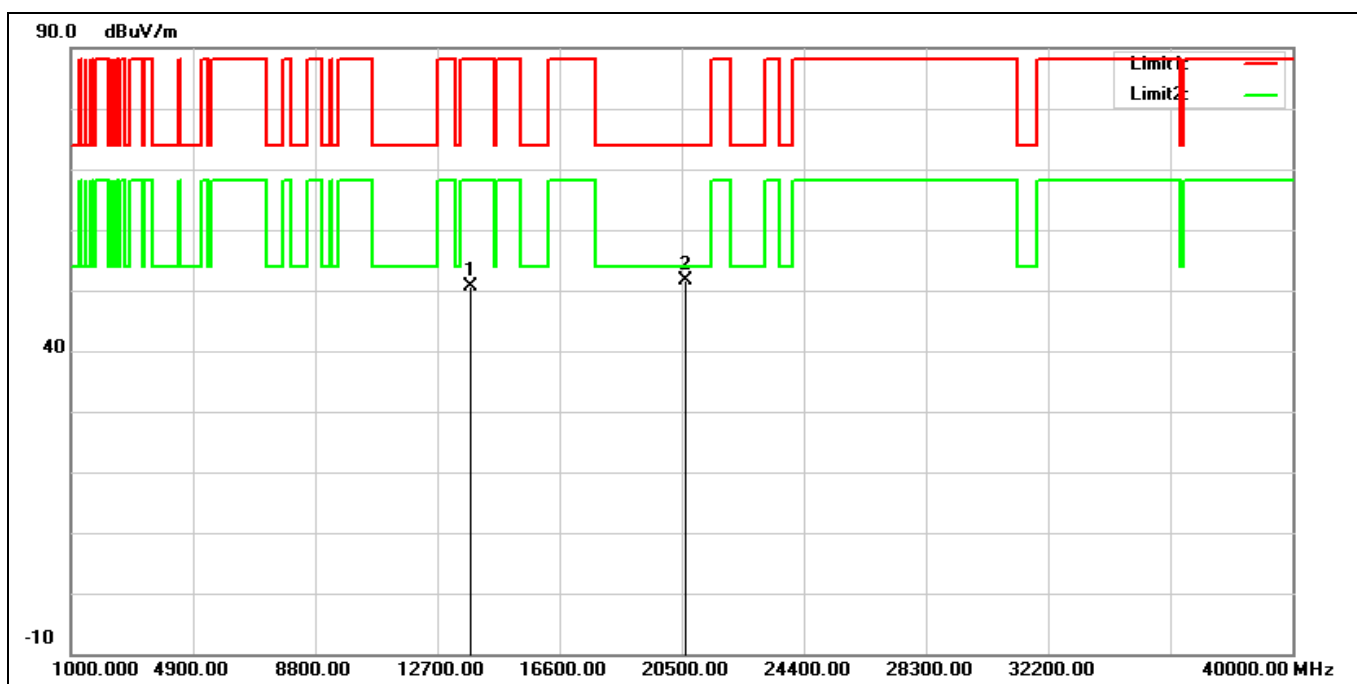


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	34.38	16.16	50.54	88.20	-37.66	peak
2*	20655.000	31.56	20.17	51.73	74.00	-22.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6885 MHz		
Remark:			

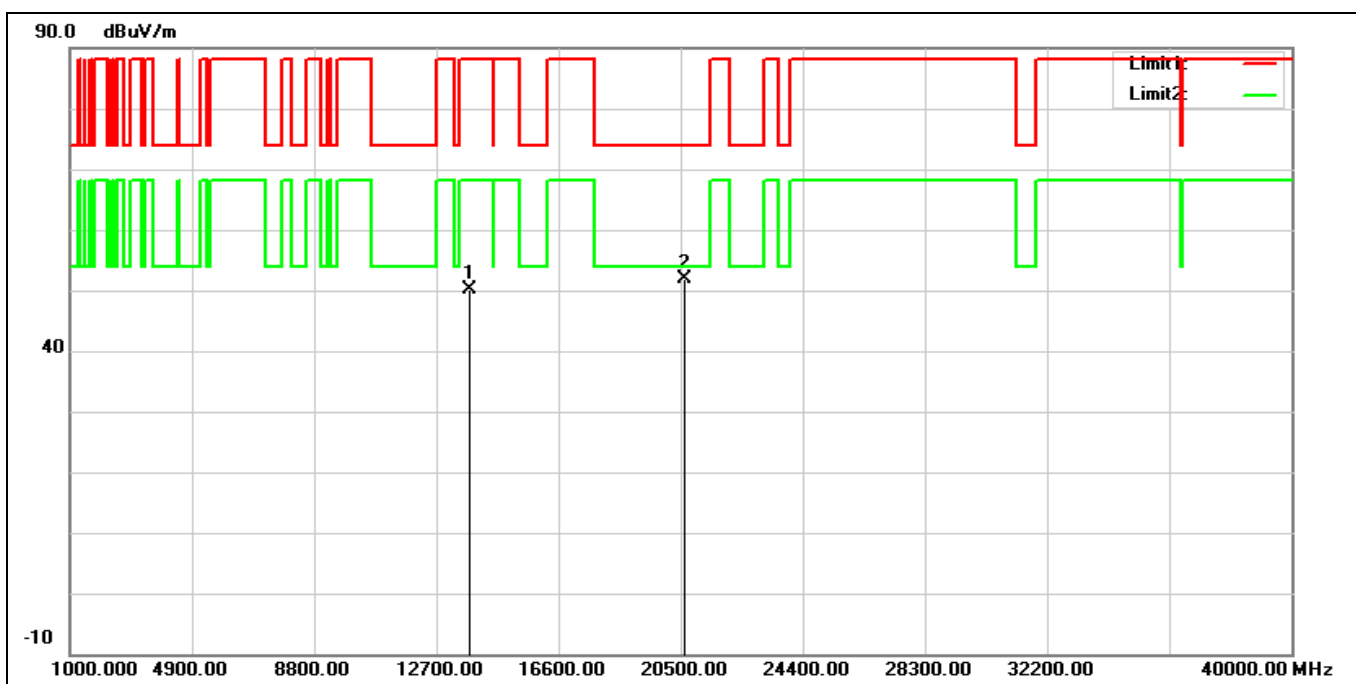


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	33.86	16.16	50.02	88.20	-38.18	peak
2*	20655.000	31.77	20.17	51.94	74.00	-22.06	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6925 MHz		
Remark:			

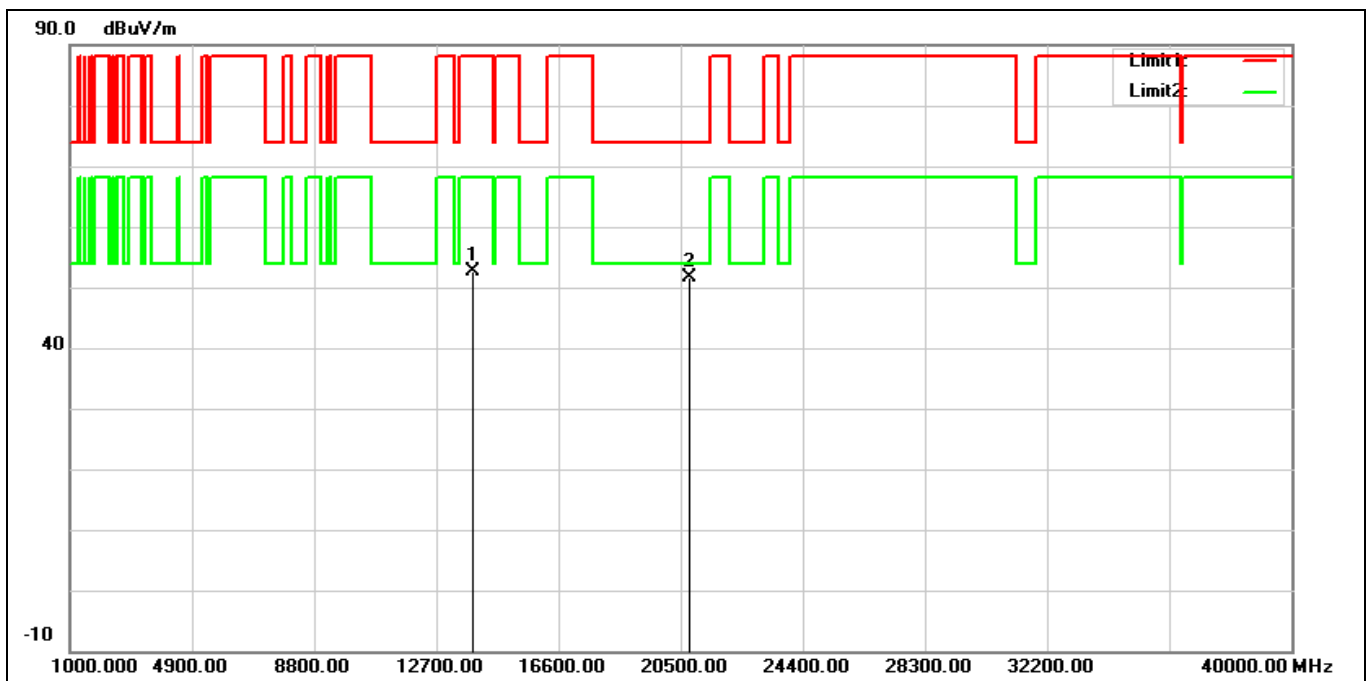

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	35.72	16.85	52.57	88.20	-35.63	peak
2*	20775.000	31.30	20.45	51.75	74.00	-22.25	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6925 MHz		
Remark:			

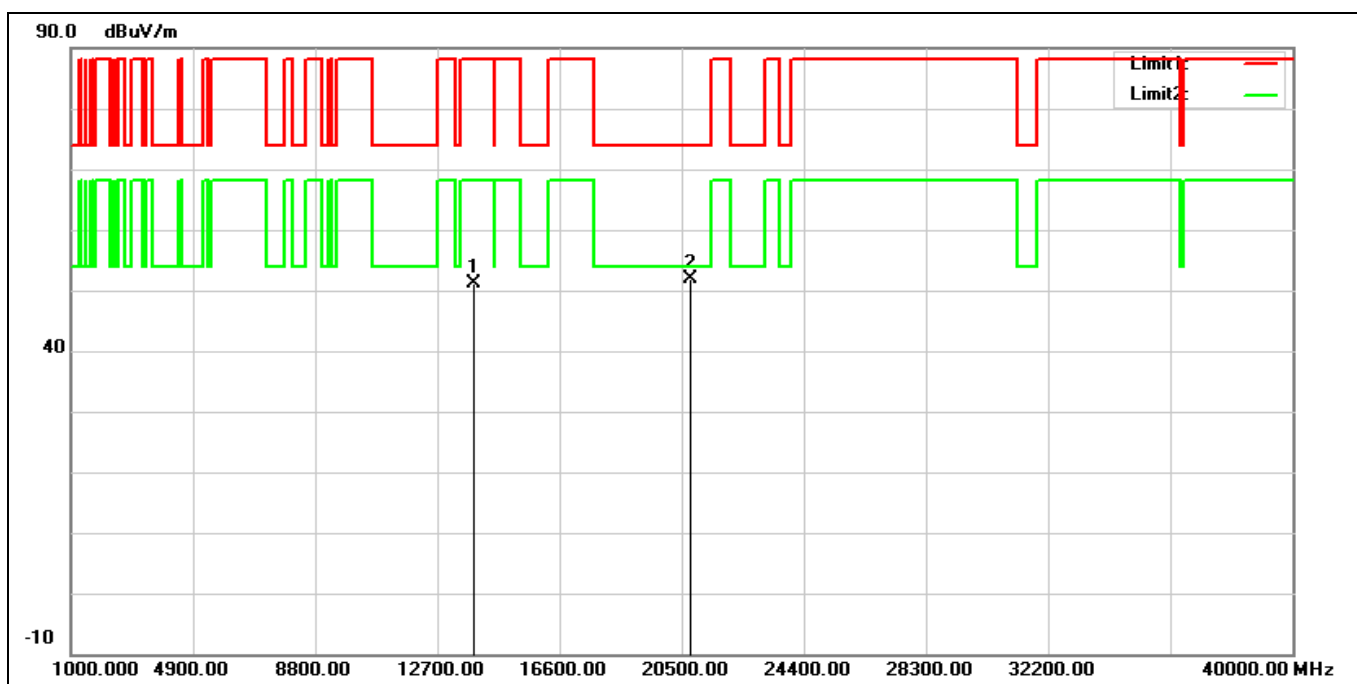

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	34.36	16.85	51.21	88.20	-36.99	peak
2*	20775.000	31.46	20.45	51.91	74.00	-22.09	peak