



RF TEST REPORT

Report No.: SET2020-05875

Product Name: USB Modem

FCC ID: SRQ-MF863

Model No.: A002ZT, MF863

Marketing Name: Softbank

Applicant: ZTE Corporation.

Address: ZTE Plaza, Keji Road South, Shenzhen, China.

Dates of Testing: 05/20/2020 —06/08/2020

Issued by: CCIC Southern Testing Co., Ltd

Lab Location: Electronic Testing Building, No. 43 Shahe Road Xili Street,
Nanshan District Shenzhen, Guangdong 518055, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 119 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: USB Modem

Brand Name.....: ZTE

Trade Name: ZTE

Applicant: ZTE Corporation.

Applicant Address: ZTE Plaza, Keji Road South, Shenzhen, China.

Manufacturer: ZTE Corporation.

Manufacturer Address.....: ZTE Plaza, Keji Road South, Shenzhen, China.

Test Standards: 47 CFR Part 2/24/27

Test Result.....: PASS

Tested by

Vincent

2020.06.08

Vincent, Test Engineer

Reviewed by.....

Chris You

2020.06.08

Chris You, Senior Engineer

Approved by.....

Shuangwen Zhang

2020.06.08

Shuangwen Zhang, Manager



Table of Contents

1.	GENERAL INFORMATION	5
1.1	EUT Description.....	5
1.2	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator.....	6
1.3	Test Standards and Results.....	8
1.4	Test Configuration of Equipment Under Test	10
1.5	Measurement Results Explanation Example.....	11
1.6	Facilities and Accreditations	12
2.	47 CFR PART 2 REQUIREMENTS.....	13
2.1	Conducted RF Output Power.....	13
2.2	Peak to Average Ratio	15
2.3	99% Occupied Bandwidth and 26dB Bandwidth	17
2.4	Frequency Stability	19
2.5	Conducted Out of Band Emissions.....	22
2.6	Conducted Band Edge	25
2.7	Transmitter Radiated Power (EIRP/ERP).....	27
2.8	Radiated Out of Band Emissions	34
3.	LIST OF MEASURING EQUIPMENT	41
4.	UNCERTAINTY OF EVALUATION	42
	APPENDIX A	43
	Conducted RF (Average) Output Power	43
	Peak To Average Ratio	54
	99% Occupied Bandwidth.....	57
	26dB Bandwidth.....	67
	Frequency Stability	77
	Conducted Out of Band Emissions.....	80
	Conducted Band Edge	90



Change History		
Issue	Date	Reason for change
1.0	2020.06.08	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	USB Modem
EUT supports Radios application	LTE Band 2/4/12/17/41
Frequency Range	LTE Band 2: 1850.7MHz~1909.3MHz LTE Band 4: 1710.7MHz~1754.3MHz LTE Band 12: 699.7MHz~715.3MHz LTE Band 17: 706.5MHz~713.5MHz LTE Band 41: 2498.5MHz~2687.5MHz
Maximum Output Power to Antenna	LTE Band 2: 22.00dBm LTE Band 4: 21.58dBm LTE Band 12: 21.97dBm LTE Band 17: 21.74dBm LTE Band 41: 21.71 dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 4: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 12: 1.4MHz/3MHz/5MHz/10MHz LTE Band 17: 5MHz/10MHz LTE Band 41: 5MHz/10MHz/15MHz/20MHz
Modulation Type	QPSK/16QAM/64QAM(downlink only)
Antenna Type	Internal Antenna
Power supply	DC 5V from USB port

Note: these two model only model name is different, no other change

1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

Band	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
LTE Band 2	QPSK	1.4	1M09G7D	—	0.145
LTE Band 2	16QAM	1.4	1M09W7D	—	0.102
LTE Band 2	QPSK	3	2M68G7D	—	0.144
LTE Band 2	16QAM	3	2M68W7D	—	0.105
LTE Band 2	QPSK	5	4M49G7D	—	0.143
LTE Band 2	16QAM	5	4M49W7D	—	0.104
LTE Band 2	QPSK	10	8M92G7D	0.010	0.128
LTE Band 2	16QAM	10	8M92W7D	—	0.114
LTE Band 2	QPSK	15	13M4G7D	—	0.160
LTE Band 2	16QAM	15	13M4W7D	—	0.098
LTE Band 2	QPSK	20	17M9G7D	—	0.149
LTE Band 2	16QAM	20	17M9W7D	—	0.124
LTE Band 4	QPSK	1.4	1M09G7D	—	0.142
LTE Band 4	16QAM	1.4	1M09W7D	—	0.093
LTE Band 4	QPSK	3	2M68G7D	—	0.139
LTE Band 4	16QAM	3	2M68W7D	—	0.093
LTE Band 4	QPSK	5	4M49G7D	—	0.141
LTE Band 4	16QAM	5	4M49W7D	—	0.110
LTE Band 4	QPSK	10	8M92G7D	0.003	0.148
LTE Band 4	16QAM	10	8M92W7D	—	0.086
LTE Band 4	QPSK	15	13M5G7D	—	0.136
LTE Band 4	16QAM	15	13M5W7D	—	0.088
LTE Band 4	QPSK	20	17M9G7D	—	0.150
LTE Band 4	16QAM	20	17M9W7D	—	0.086

LTE Band 12	QPSK	1.4	1M09G7D	—	0.141
LTE Band 12	16QAM	1.4	1M08W7D	—	0.109
LTE Band 12	QPSK	3	2M68G7D	—	0.137
LTE Band 12	16QAM	3	2M68W7D	—	0.123
LTE Band 12	QPSK	5	4M49G7D	—	0.139
LTE Band 12	16QAM	5	4M49W7D	—	0.109
LTE Band 12	QPSK	10	8M93G7D	0.007	0.162
LTE Band 12	16QAM	10	8M92W7D	—	0.124
LTE Band 17	QPSK	5	4M49G7D	—	0.102
LTE Band 17	16QAM	5	4M49W7D	—	0.065
LTE Band 17	QPSK	10	8M92G7D	0.005	0.101
LTE Band 17	16QAM	10	8M91W7D	—	0.069
LTE Band 41	QPSK	5	4M49G7D	—	0.135
LTE Band 41	16QAM	5	4M49W7D	—	0.116
LTE Band 41	QPSK	10	8M92G7D	0.012	0.137
LTE Band 41	16QAM	10	8M91W7D	—	0.119
LTE Band 41	QPSK	15	13M5G7D	—	0.110
LTE Band 41	16QAM	15	13M4W7D	—	0.121
LTE Band 41	QPSK	20	17M9G7D	—	0.142
LTE Band 41	16QAM	20	17M9W7D	—	0.114



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part24, Part27, Part90, for the EUT FCC ID Certification:

1.47 CFR Part 2/24/27

2. ANSI/TIA/EIA-603-D-2010

3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
1	2.1046	Conducted RF Output Power	Reporting Only	PASS
2	24.232(d) 27.50(d)	Peak to Average Ratio	<13dB	PASS
3	27.50(b)(10) 27.50(c)(10)	Effective Radiated Power(Band 12/17)	EIRP<3Watt	PASS
	27.50(h)(2) 24.232(c)	Effective Radiated Power(Band 2/41)	EIRP<2Watt	PASS
	27.50(d)(4)	Effective Radiated Power(Band 4)	EIRP<1Watt	PASS
4	2.1049	Occupied Bandwidth	Reporting Only	PASS
5	2.1051 24.238(b) 27.53(g) 27.53(h)	Conducted Band Edge (Band 2/4/12/17)	<43+10log10(P[watt])	PASS
	2.1051 27.53(i)(4)	Conducted Band Edge(Band 41)	<5.5MHz: -13dBm ≥5.5MHz: -25dBm	PASS
6	2.1051 24.238(a) 27.53(g) 27.53(h)	Conducted Spurious Emission (Band 2/4/12/17)	<43+10log10(P[watt])	PASS
	2.1051 27.53(i)(4)	Conducted Spurious Emission (Band 41)	<55+10log10(P[watt])	PASS
7	2.1053 24.238(a) 27.53(g)	Radiated Spurious Emission (Band 2/4/12/17)	<43+10log10(P[watt])	PASS



	27.53(h)			
	27.53(i)(4)	Radiated Spurious Emission (Band 41)	$<55+10\log_{10}(P[\text{watt}])$	PASS
8	2.1055, 24.235 27.54	Frequency Stability	$<2.5\text{ppm}$	PASS

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	17			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2				✓				✓	✓		✓	✓	✓	✓
	4				✓				✓	✓		✓	✓	✓	✓
	12														
	17														
	41														
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	12	✓	✓	✓	✓			✓	✓			✓		✓	
	41			✓	✓	✓	✓	✓	✓			✓		✓	
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	4	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	12	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	17			✓	✓			✓	✓			✓		✓	
	41			✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓						✓		✓			✓	✓	✓
	4	✓						✓		✓			✓	✓	✓
	12	✓						✓		✓			✓	✓	✓
	17			✓				✓		✓			✓	✓	✓
	41			✓	✓	✓	✓	✓		✓			✓	✓	✓
Frequency Stability	2				✓			✓				✓		✓	
	4				✓			✓				✓		✓	
	12				✓			✓				✓		✓	
	17				✓			✓				✓		✓	
	41				✓			✓				✓		✓	
ERP/EIRP	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓

	4	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	12	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	17			✓	✓			✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	2	Worst case													
	4	Worst case													
	12	Worst case													
	17	Worst case													
	41	Worst case													
Note	1. The mark “ ✓ ” means that this configuration is chosen for testing. 2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 3. For E.R.P/E.I.R.P. measurement, the widest bandwidth and the bandwidth with the highest conducted power of each band is chosen for testing. Besides, the lowest bandwidth of each band is also measured for reporting only.														

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7dB and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7 + 10 = 17 \text{ (dB)}\end{aligned}$$



1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: CN5031

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2020.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Dec. 31, 2020.

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2 REQUIREMENTS

2.1 Conducted RF Output Power


2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Setup

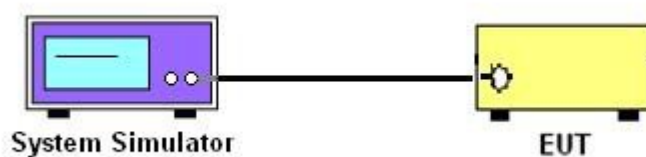

2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



2.1.5 Test Results

Please refer to Appendix A for detail

2.2 Peak to Average Ratio


2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.2.3 Test Description

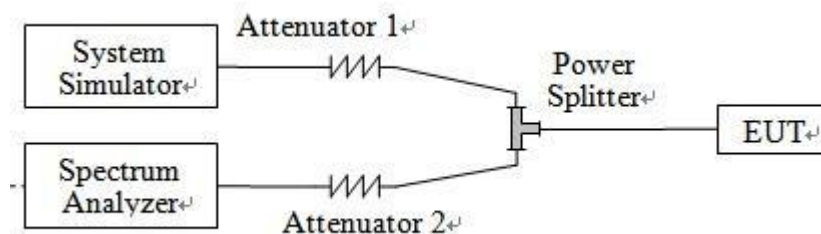

2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



2.2.5 Test Results of Peak-to-Average Ratio

Please refer to Appendix A for detail

2.3 99% Occupied Bandwidth and 26dB Bandwidth

2.3.1 Definition


According to FCC section 2.1049, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.3.3 Test Setup

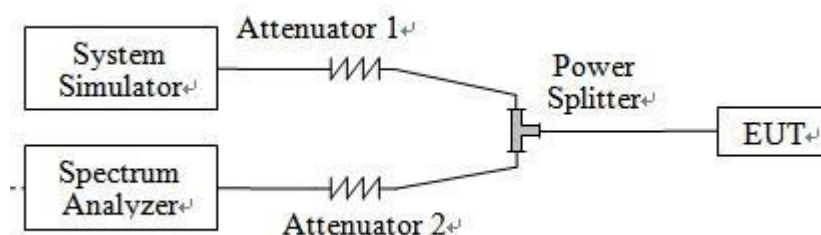

2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.



2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A for detail

2.4 Frequency Stability

2.4.1 Requirement


According to FCC requirement, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3 Test Setup

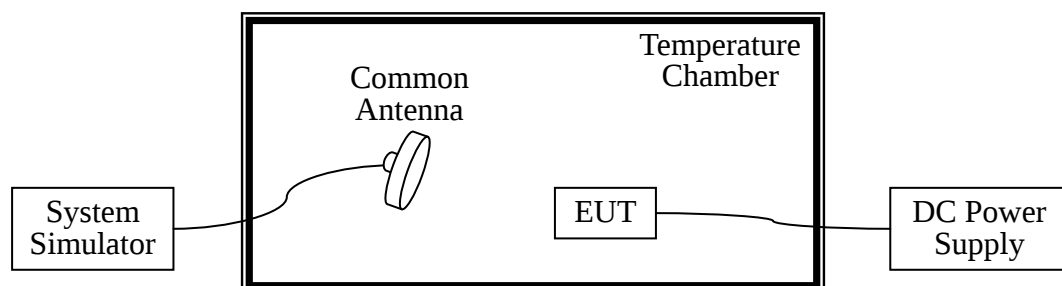

2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized

before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.



2.4.5 Test Result of Frequency Stability

Please refer to Appendix A for detail

2.5 Conducted Out of Band Emissions

2.5.1 Requirement


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.5.3 Test Setup

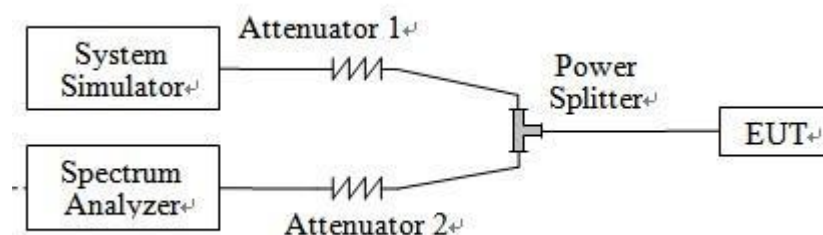

2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating

frequency band.

7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P (Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

8. For 9KHz to 30MHz: the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



2.5.5 Test Result of Conducted Spurious Emission

Please refer to Appendix A for detail

2.6 Conducted Band Edge

2.6.1 Description of Conducted Band Edge Measurement

24.238(a)

For operations in the 1850 -1910 MHz band, the FCC limit is $43 + 10\log_{10}(P [\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(g)

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53(h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


27.53m(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

2.6.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3 Test Setup

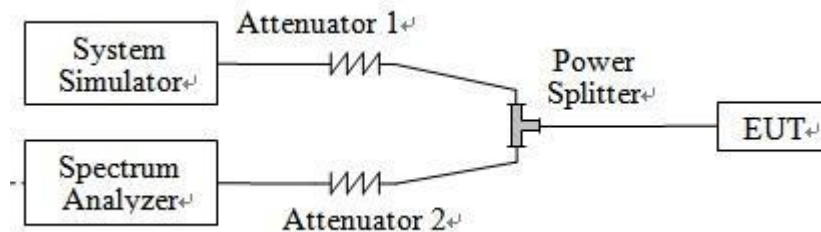

2.6.4 Test Procedures

1. The testing follows FCC KDB 971168 v03r01 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

2.6.5 Test Result of Conducted Band Edge

Please refer to Appendix A for detail

2.7 Transmitter Radiated Power (EIRP/ERP)

2.7.1 Requirement


Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, Mobile and portable (hand-held) stations operating are limited to average ERP 3 watts with LTE band 12/17.

and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v03r01. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2/41 and 1 watt with LTE band 4

2.7.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3 Test Setup

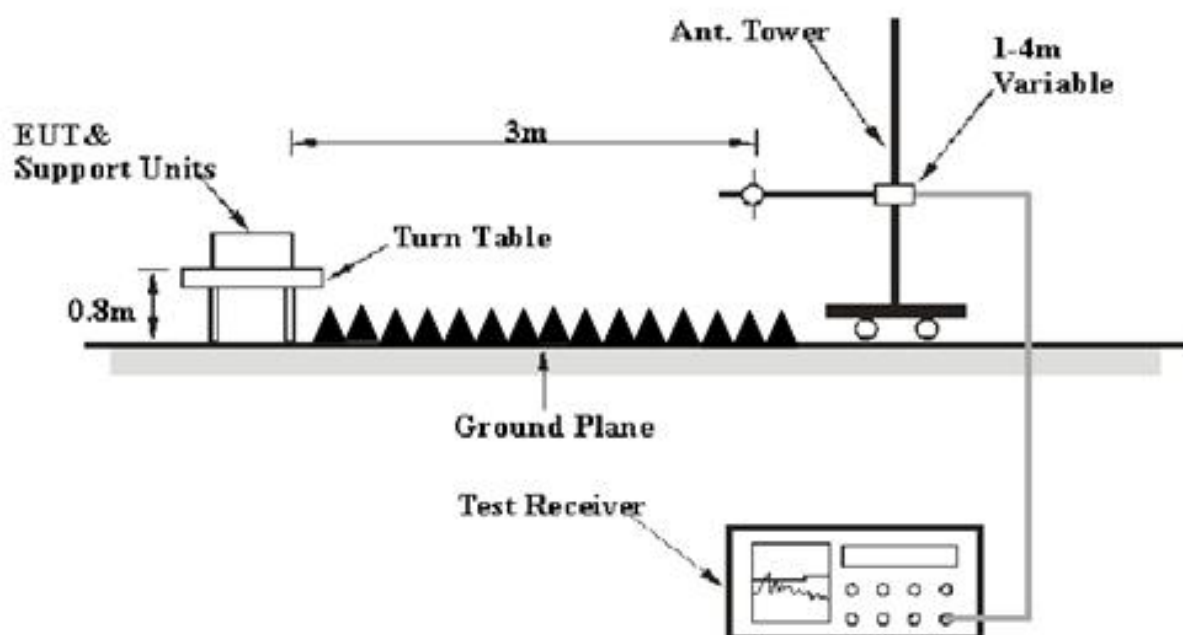

2.7.4 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01v03r01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

AF (dB/m): Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

2.7.5 Test Result of ERP/EIRP

1. LTE Band 2 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
2	1.4	QPSK	1	2	1850.7	21.60	PASS
2	1.4	QPSK	1	5	1880	21.58	PASS
2	1.4	QPSK	3	2	1909.3	21.61	PASS
2	1.4	16QAM	1	0	1850.7	20.01	PASS
2	1.4	16QAM	1	2	1880	20.02	PASS
2	1.4	16QAM	3	2	1909.3	20.10	PASS
2	3	QPSK	1	7	1851.5	21.56	PASS
2	3	QPSK	1	14	1880	21.54	PASS
2	3	QPSK	1	0	1908.5	21.57	PASS
2	3	16QAM	1	14	1851.5	20.16	PASS
2	3	16QAM	1	0	1880	20.20	PASS
2	3	16QAM	1	0	1908.5	20.23	PASS
2	5	QPSK	1	0	1852.5	21.55	PASS
2	5	QPSK	1	0	1880	21.49	PASS
2	5	QPSK	1	24	1907.5	21.56	PASS
2	5	16QAM	1	12	1852.5	20.14	PASS
2	5	16QAM	1	0	1880	20.07	PASS
2	5	16QAM	1	12	1907.5	20.15	PASS
2	10	QPSK	1	0	1855	21.08	PASS
2	10	QPSK	1	0	1880	20.97	PASS
2	10	QPSK	1	49	1905	21.06	PASS
2	10	16QAM	1	0	1855	20.57	PASS
2	10	16QAM	1	0	1880	20.55	PASS
2	10	16QAM	1	24	1905	20.58	PASS
2	15	QPSK	1	0	1857.5	21.94	PASS
2	15	QPSK	1	0	1880	22.04	PASS
2	15	QPSK	1	74	1902.5	21.98	PASS
2	15	16QAM	1	0	1857.5	19.82	PASS
2	15	16QAM	1	0	1880	19.85	PASS
2	15	16QAM	1	74	1902.5	19.93	PASS
2	20	QPSK	1	0	1860	21.73	PASS
2	20	QPSK	1	0	1880	21.67	PASS
2	20	QPSK	1	0	1900	21.66	PASS
2	20	16QAM	1	0	1860	20.91	PASS
2	20	16QAM	1	0	1880	20.86	PASS
2	20	16QAM	1	49	1900	20.93	PASS

2. LTE Band 4 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
4	1.4	QPSK	1	0	1710.7	21.43	PASS
4	1.4	QPSK	1	0	1732.5	21.51	PASS
4	1.4	QPSK	1	0	1754.3	21.44	PASS
4	1.4	16QAM	1	0	1710.7	19.64	PASS
4	1.4	16QAM	1	0	1732.5	19.55	PASS
4	1.4	16QAM	1	0	1754.3	19.69	PASS
4	3	QPSK	1	0	1711.5	21.42	PASS
4	3	QPSK	1	0	1732.5	21.31	PASS
4	3	QPSK	1	0	1753.5	21.43	PASS
4	3	16QAM	1	14	1711.5	19.64	PASS
4	3	16QAM	1	14	1732.5	19.69	PASS
4	3	16QAM	1	14	1753.5	19.62	PASS
4	5	QPSK	1	24	1712.5	21.48	PASS
4	5	QPSK	1	24	1732.5	21.37	PASS
4	5	QPSK	1	24	1752.5	21.43	PASS
4	5	16QAM	1	24	1712.5	20.42	PASS
4	5	16QAM	1	0	1732.5	20.35	PASS
4	5	16QAM	1	0	1752.5	20.43	PASS
4	10	QPSK	1	0	1715	21.68	PASS
4	10	QPSK	1	0	1732.5	21.66	PASS
4	10	QPSK	1	0	1750	21.71	PASS
4	10	16QAM	1	24	1715	19.35	PASS
4	10	16QAM	1	0	1732.5	19.28	PASS
4	10	16QAM	1	24	1750	19.36	PASS
4	15	QPSK	1	74	1717.5	21.26	PASS
4	15	QPSK	1	74	1732.5	21.18	PASS
4	15	QPSK	1	0	1747.5	21.32	PASS
4	15	16QAM	1	74	1717.5	19.39	PASS
4	15	16QAM	1	0	1732.5	19.44	PASS
4	15	16QAM	1	0	1747.5	19.32	PASS
4	20	QPSK	1	0	1720	21.66	PASS
4	20	QPSK	1	0	1732.5	21.73	PASS
4	20	QPSK	1	0	1745	21.75	PASS
4	20	16QAM	1	0	1720	19.36	PASS
4	20	16QAM	1	0	1732.5	19.29	PASS
4	20	16QAM	1	0	1745	19.37	PASS

3. LTE Band 12 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	Verdict
			RB Size	RB Offset			
12	1.4	QPSK	3	0	699.7	21.40	PASS
12	1.4	QPSK	3	2	707.5	21.48	PASS
12	1.4	QPSK	1	2	715.3	21.41	PASS
12	1.4	16QAM	3	2	699.7	20.31	PASS
12	1.4	16QAM	3	2	707.5	20.35	PASS
12	1.4	16QAM	3	2	715.3	20.36	PASS
12	3	QPSK	1	0	700.5	21.34	PASS
12	3	QPSK	1	0	707.5	21.38	PASS
12	3	QPSK	1	7	714.5	21.35	PASS
12	3	16QAM	1	14	700.5	20.86	PASS
12	3	16QAM	1	14	707.5	20.78	PASS
12	3	16QAM	1	14	714.5	20.89	PASS
12	5	QPSK	1	12	701.5	21.40	PASS
12	5	QPSK	1	24	707.5	21.34	PASS
12	5	QPSK	1	24	713.5	21.42	PASS
12	5	16QAM	1	24	701.5	20.26	PASS
12	5	16QAM	1	0	707.5	20.39	PASS
12	5	16QAM	1	0	713.5	20.32	PASS
12	10	QPSK	1	24	704	22.01	PASS
12	10	QPSK	1	0	707.5	22.09	PASS
12	10	QPSK	1	24	711	21.98	PASS
12	10	16QAM	1	24	704	20.92	PASS
12	10	16QAM	1	0	707.5	20.95	PASS
12	10	16QAM	1	24	711	20.91	PASS



4. LTE Band 17 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
17	5	QPSK	1	24	706.5	19.99	PASS
17	5	QPSK	1	24	710	20.03	PASS
17	5	QPSK	1	12	713.5	20.09	PASS
17	5	16QAM	1	24	706.5	18.15	PASS
17	5	16QAM	1	24	710	18.08	PASS
17	5	16QAM	1	12	713.5	18.13	PASS
17	10	QPSK	1	49	709	20.06	PASS
17	10	QPSK	1	49	710	20.01	PASS
17	10	QPSK	1	49	711	19.96	PASS
17	10	16QAM	1	24	709	18.37	PASS
17	10	16QAM	1	49	710	18.30	PASS
17	10	16QAM	1	24	711	18.28	PASS

5.LTE Band 41 Test Verdict:

LTE Band	BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	EIRP (dBm)	Verdict
			RB Size	RB Offset			
41	5	QPSK	1	0	2498.5	21.29	PASS
41	5	QPSK	1	0	2593.0	21.31	PASS
41	5	QPSK	1	0	2687.5	21.28	PASS
41	5	16QAM	1	0	2498.5	20.66	PASS
41	5	16QAM	1	0	2593.0	20.65	PASS
41	5	16QAM	1	0	2687.5	20.63	PASS
41	10	QPSK	1	49	2501.0	21.36	PASS
41	10	QPSK	1	49	2593.0	21.33	PASS
41	10	QPSK	1	49	2685.0	21.35	PASS
41	10	16QAM	1	0	2501.0	20.73	PASS
41	10	16QAM	1	0	2593.0	20.71	PASS
41	10	16QAM	1	0	2685.0	20.74	PASS
41	15	QPSK	1	0	2503.5	20.40	PASS
41	15	QPSK	1	0	2593.0	20.38	PASS
41	15	QPSK	1	0	2682.5	20.39	PASS
41	15	16QAM	1	74	2503.5	20.81	PASS
41	15	16QAM	1	74	2593.0	20.79	PASS
41	15	16QAM	1	74	2682.5	20.82	PASS
41	20	QPSK	1	0	2506.0	21.52	PASS
41	20	QPSK	1	0	2593.0	21.13	PASS
41	20	QPSK	1	0	2680.0	21.12	PASS
41	20	16QAM	1	49	2506.0	20.57	PASS
41	20	16QAM	1	49	2593.0	20.54	PASS
41	20	16QAM	1	49	2680.0	20.55	PASS

2.8 Radiated Out of Band Emissions

2.8.1 Requirement

The radiated spurious emission was measured by substitution method according to ANSI / TIA /EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

2.8.2 Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.8.3 Test Setup


For radiated emissions from 9kHz to 30MHz

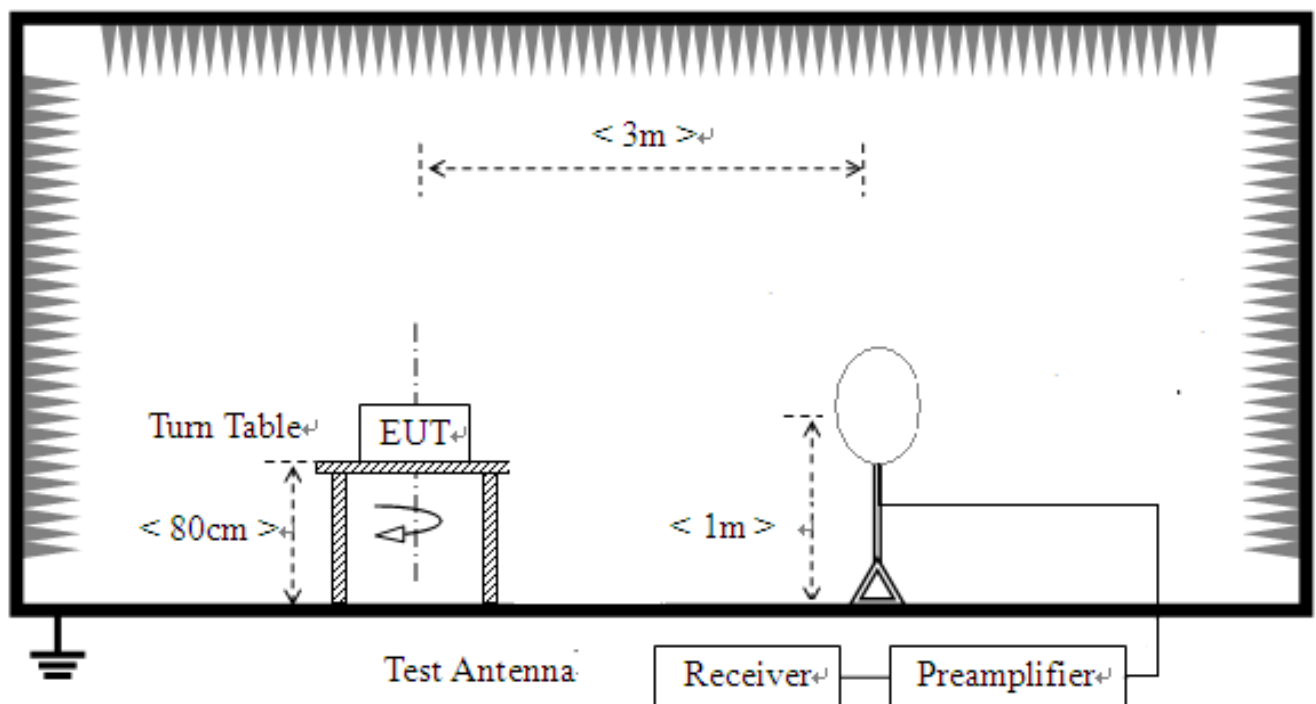

For radiated emissions from 30MHz to 1GHz

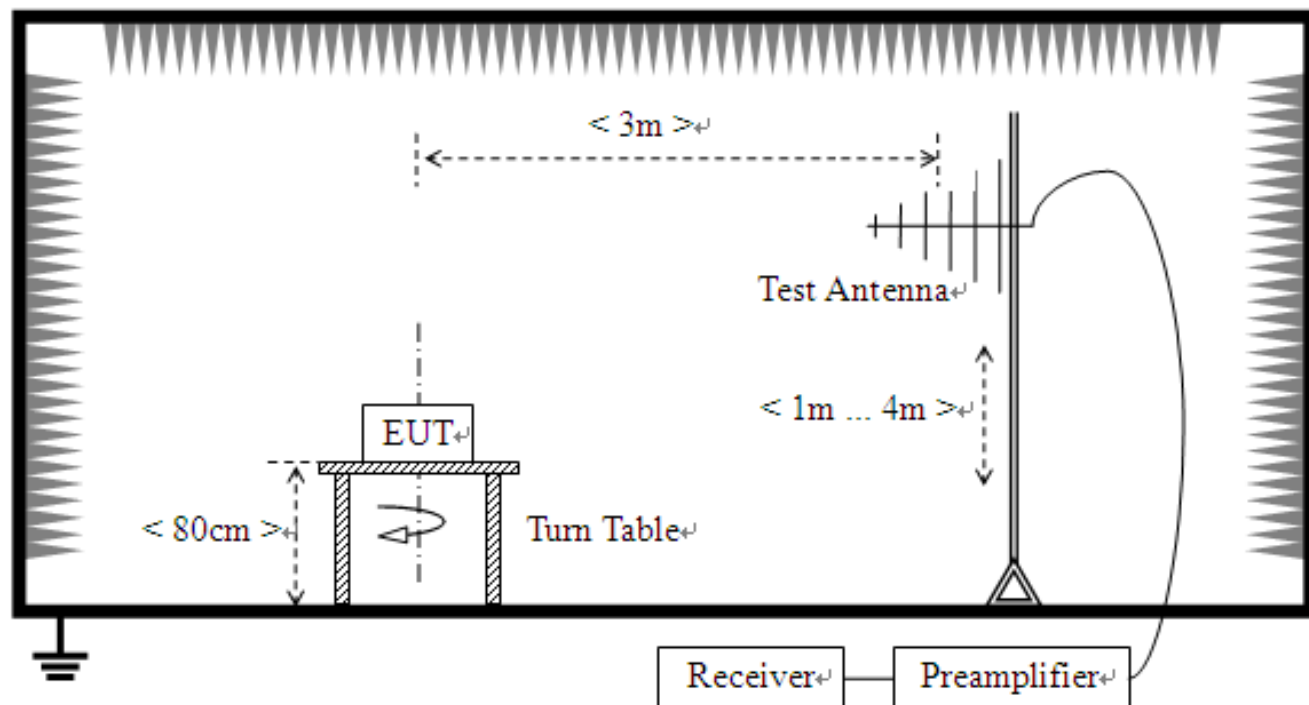

For radiated emissions above 1GHz

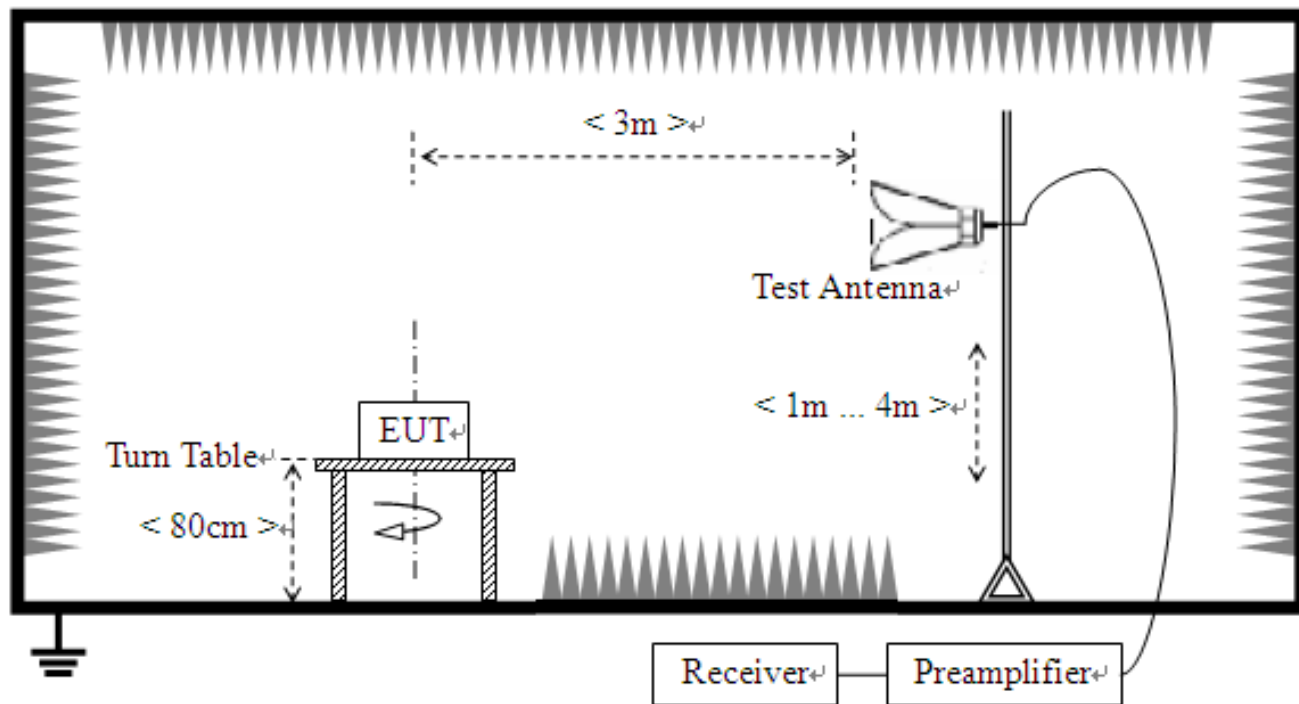

2.8.4 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
11. All Spurious Emission tests were performed in X, Y, Z axis direction and low, middle, high channel. And only the worst axis test condition was recorded in this test report.
12. The spectrum is measured from 9 KHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. The worst case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
13. The maximum RB configurations of the Radiated Spurious Emissions as RB Size 1, RB Offset 0

2.8.5 Test Result (Plots) of Radiated Spurious Emission

Note: 1. within 30MHz-1GHz were found more than 20dB below limit line

Note: 2. Absolute Level=Reading Level + Factor

LTE Band 2 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9410	-93.76	-68.28	-13.00	55.28	25.48	Horizontal
2	166.838	-98.96	-75.22	-13.00	62.22	23.74	Horizontal
3	2721.86	-58.49	-50.88	-13.00	37.88	7.61	Horizontal
4	5236.11	-59.60	-47.69	-13.00	34.69	11.91	Horizontal
5	7494.74	-60.05	-43.51	-13.00	30.51	16.54	Horizontal
6	10661.3	-62.53	-38.36	-13.00	25.36	24.17	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	35.3377	-93.14	-70.36	-13.00	57.36	22.78	Vertical
2	2665.83	-58.56	-50.93	-13.00	37.93	7.63	Vertical
3	5086.04	-60.37	-46.22	-13.00	33.22	14.15	Vertical
4	7187.09	-60.36	-43.76	-13.00	30.76	16.60	Vertical
5	10158.5	-61.50	-38.05	-13.00	25.05	23.45	Vertical
6	12102.0	-62.77	-37.26	-13.00	24.26	25.51	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 4 QPSK 20MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.4852	-93.13	-67.31	-13.00	54.31	25.82	Horizontal
2	59.1146	-92.99	-71.69	-13.00	58.69	21.30	Horizontal
3	74.1571	-88.15	-66.89	-13.00	53.89	21.26	Horizontal
4	2710.85	-57.62	-49.81	-13.00	36.81	7.81	Horizontal
5	5191.09	-59.30	-47.59	-13.00	34.59	11.71	Horizontal
6	10241.1	-62.36	-38.61	-13.00	25.61	23.75	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	59.1146	-91.50	-69.57	-13.00	56.57	21.93	Vertical
2	2653.82	-56.62	-49.32	-13.00	36.32	7.30	Vertical
3	5093.54	-61.07	-46.85	-13.00	33.85	14.22	Vertical
4	7082.04	-59.70	-43.55	-13.00	30.55	16.15	Vertical
5	10173.5	-62.63	-39.13	-13.00	26.13	23.50	Vertical
6	12012.0	-62.99	-37.67	-13.00	24.67	25.32	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report

LTE Band 12 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.3234	-93.01	-68.95	-13.00	55.95	24.06	Horizontal
2	59.4331	-92.99	-73.46	-13.00	60.46	19.53	Horizontal
3	1804.16	-57.57	-55.84	-13.00	42.84	1.73	Horizontal
4	2935.98	-57.28	-49.50	-13.00	36.50	7.78	Horizontal
5	7977.39	-60.98	-42.46	-13.00	29.46	18.52	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	30.3234	-93.77	-72.13	-13.00	59.13	21.64	Vertical
2	59.4331	-92.43	-72.23	-13.00	59.23	20.20	Vertical
3	1780.55	-57.93	-57.32	-13.00	44.32	0.61	Vertical
4	2948.78	-57.06	-50.23	-13.00	37.23	6.83	Vertical
5	5094.71	-60.62	-46.39	-13.00	33.39	14.23	Vertical

LTE Band 17 QPSK 10MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	59.1097	-92.15	-71.99	-13.00	58.99	20.16	Vertical
2	74.3114	-88.96	-67.08	-13.00	54.08	21.88	Vertical
3	1662.53	-50.34	-52.11	-13.00	39.11	-1.77	Vertical
4	2655.93	-54.45	-48.29	-13.00	35.29	6.16	Vertical
5	5063.51	-59.13	-45.19	-13.00	32.19	13.94	Vertical

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	59.7566	-91.16	-71.62	-13.00	58.62	19.54	Horizontal
2	73.9880	-85.72	-66.17	-13.00	53.17	19.55	Horizontal
3	1826.96	-56.24	-55.14	-13.00	42.14	1.10	Horizontal
4	3723.59	-58.68	-49.92	-13.00	36.92	8.76	Horizontal
5	6075.76	-58.97	-45.06	-13.00	32.06	13.91	Horizontal

LTE Band 41 QPSK 15MHz BW Middle Channel

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-91.66	-68.85	-25	43.85	22.81	Horizontal
2	59.1291	-92.70	-74.28	-25	49.28	18.42	Horizontal
3	5150.95	-58.45	-46.53	-25	21.53	11.92	Horizontal
4	7238.49	-59.43	-42.54	-25	17.54	16.89	Horizontal
5	10218.6	-60.10	-36.31	-25	11.31	23.79	Horizontal

Suspected List							
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Polarity
1	31.9419	-91.61	-71.06	-25	46.06	20.55	Vertical
2	73.6937	-86.00	-65.35	-25	40.35	20.65	Vertical
3	5029.01	-59.31	-45.70	-25	20.7	13.61	Vertical
4	6380.06	-58.99	-44.28	-25	19.28	14.71	Vertical
5	10116.1	-60.75	-37.44	-25	12.44	23.31	Vertical

Note: other spurious emissions are 20dB below limit line and no need to report



3. LIST OF MEASURING EQUIPMENT

Description	Manufacturer	Model	Serial No.	Cal. Date	Due Date	Remark
EMI Test Receiver	R&S	ESIB7	A0501375	2019.07.30	2020.07.29	Radiation
Loop Antenna	Schwarz beck	HFH2-Z2	100047	2019.04.26	2022.04.25	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101341	2017.07.14	2020.07.13	Radiation
Broadband antenna (30MHz~1GHz)	R&S	HL562	101339	2017.07.14	2020.07.13	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100150	2019.04.27	2022.04.26	Radiation
Double ridge horn antenna (1GHz~18GHz)	R&S	HF906	100149	2019.04.17	2022.04.16	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4002A	305753	2017.07.12	2020.07.11	Radiation
Horn antenna (18GHz~26.5GHz)	AR	AT4003A	0329293	2018.09.17	2020.09.16	Radiation
Amplifier 1GHz-18GHz	AR	25S1G4AM1	22018	2018.09.17	2020.09.16	Radiation
Ampilier 20M~3GHz	MILMEGA	80RF1000-250	1064573	2017.10.09	2020.10.08	Radiation
Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2020.05.18	2021.05.17	Conducted
Test Receiver	R&S	ESCI	A0902601	2019.07.02	2020.07.01	Conducted
Temperature chamber	welissom Inc.	SU-642	A150802409	2019.07.18	2020.07.17	Conducted
Wideband Radio Communication tester	R&S	CMW500	A130101034	2019.07.30	2021.07.29	Conducted
Power Supply	R&S	NGMO1	101037	2019.08.03	2020.08.02	Conducted

4. UNCERTAINTY OF EVALUATION

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150KHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	5.1dB
---	-------



APPENDIX A

Conducted RF (Average) Output Power

Test Result and Data

1.LTE Band 2 Conducted Power Test Verdict:

LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	21.89	21.91	21.78	21.0±1.0
		1	3	21.87	21.95	21.83	
		1	5	21.66	21.76	21.9	
		3	0	21.36	21.53	21.43	21.0±1.0
		3	2	21.57	21.32	21.51	
		3	3	21.53	21.57	21.57	
		6	0	21.2	21.2	21.21	20.5±1.0
	16QAM	1	0	20.93	21.01	20.93	20.5±1.0
		1	3	21	21.07	21.09	
		1	5	20.98	20.97	20.88	
		3	0	20.58	20.72	20.49	20.0±1.0
		3	2	20.5	20.49	20.75	
		3	3	20.71	20.51	20.65	
		6	0	20.33	20.37	20.38	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	21.73	21.7	21.87	21.0±1.0
		1	7	21.86	21.72	21.86	
		1	14	21.86	21.73	21.82	
		8	0	21.32	21.37	21.55	21.0±1.0
		8	4	21.4	21.53	21.38	
		8	7	21.46	21.55	21.44	
		15	0	21.24	21.25	21.18	20.5±1.0
	16QAM	1	0	20.85	20.86	21	20.5±1.0
		1	7	20.9	21.05	20.8	
		1	14	21.06	21.08	20.84	
		8	0	20.74	20.48	20.53	20.0±1.0
		8	4	20.74	20.73	20.56	
		8	7	20.45	20.63	20.64	
		15	0	20.34	20.32	20.32	19.5±1.0



LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	21.85	21.79	21.95	21.0±1.0
		1	13	21.91	21.78	21.83	
		1	24	21.87	21.89	21.75	
		12	0	21.57	21.59	21.47	21.0±1.0
		12	6	21.59	21.44	21.51	
		12	13	21.34	21.43	21.44	
		25	0	21.19	21.23	21.25	20.5±1.0
	16QAM	1	0	20.94	20.88	20.8	20.5±1.0
		1	13	20.91	20.89	21.04	
		1	24	20.97	20.93	21.04	
		12	0	20.69	20.66	20.64	20.0±1.0
		12	6	20.67	20.69	20.68	
		12	13	20.59	20.73	20.56	
		25	0	20.36	20.4	20.3	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	21.76	21.84	21.87	21.0±1.0
		1	25	21.83	21.95	21.76	
		1	49	21.91	21.68	21.74	
		25	0	21.35	21.35	21.42	21.0±1.0
		25	13	21.48	21.58	21.5	
		25	25	21.53	21.41	21.38	
		50	0	21.22	21.22	21.21	20.5±1.0
	16QAM	1	0	20.93	20.93	21.02	20.5±1.0
		1	25	20.99	21.06	20.92	
		1	49	21.04	20.94	20.88	
		25	0	20.72	20.69	20.74	20.0±1.0
		25	13	20.5	20.72	20.61	
		25	25	20.53	20.51	20.67	
		50	0	20.3	20.33	20.39	19.5±1.0



LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	21.73	21.71	21.71	21.0±1.0
		1	38	21.87	21.71	21.81	
		1	74	21.92	21.83	21.72	
		36	0	21.52	21.31	21.46	21.0±1.0
		36	18	21.3	21.47	21.6	
		36	39	21.34	21.58	21.46	
		75	0	21.23	21.2	21.22	20.5±1.0
	16QAM	1	0	21.05	21.08	20.87	20.5±1.0
		1	38	21.02	20.92	21.02	
		1	74	21	21.07	20.88	
		36	0	20.61	20.54	20.62	20.0±1.0
		36	18	20.64	20.51	20.7	
		36	39	20.74	20.5	20.55	
		75	0	20.37	20.39	20.39	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	21.74	21.69	22	21.0±1.0
		1	50	21.75	21.65	21.68	
		1	99	21.67	21.75	21.87	
		50	0	21.3	21.56	21.32	21.0±1.0
		50	25	21.38	21.55	21.45	
		50	50	21.44	21.45	21.34	
		100	0	21.16	21.24	21.21	20.5±1.0
	16QAM	1	0	20.9	20.9	20.87	20.5±1.0
		1	50	20.92	21.07	20.83	
		1	99	21.02	20.91	20.88	
		50	0	20.64	20.66	20.46	20.0±1.0
		50	25	20.67	20.55	20.5	
		50	50	20.62	20.59	20.54	
		100	0	20.38	20.35	20.32	19.5±1.0

2. LTE Band 4 Conducted Power Test Verdict:

LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	21.38	21.26	21.36	20.5±1.0
		1	3	21.24	21.39	21.36	
		1	5	21.37	21.23	21.41	
		3	0	20.91	20.88	20.95	20.5±1.0
		3	2	20.89	21.12	20.92	
		3	3	21.06	20.94	21.09	
		6	0	20.77	20.77	20.76	20.0±1.0
	16QAM	1	0	20.42	20.52	20.57	20.0±1.0
		1	3	20.38	20.55	20.58	
		1	5	20.63	20.42	20.54	
		3	0	20.26	20.25	20.2	19.5±1.0
		3	2	20.02	20.16	20.22	
		3	3	20.26	20.28	20.06	
		6	0	19.87	19.85	19.85	19.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	21.45	21.29	21.22	20.5±1.0
		1	7	21.49	21.5	21.49	
		1	14	21.28	21.35	21.4	
		8	0	21.08	21.1	21.13	20.5±1.0
		8	4	21.11	21.12	21.09	
		8	7	20.89	21.09	21.09	
		15	0	20.73	20.76	20.8	20.0±1.0
	16QAM	1	0	20.38	20.48	20.36	20.0±1.0
		1	7	20.37	20.55	20.44	
		1	14	20.6	20.59	20.51	
		8	0	20.17	20.16	20.24	19.5±1.0
		8	4	20.24	20.07	20.19	
		8	7	20.05	20.19	20.19	
		15	0	19.9	19.85	19.85	19.0±1.0



LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	21.34	21.45	21.44	20.5±1.0
		1	13	21.5	21.23	21.25	
		1	24	21.23	21.2	21.22	
		12	0	21.06	20.93	20.95	20.5±1.0
		12	6	20.94	21.07	21.07	
		12	13	21.12	20.92	20.91	
		25	0	20.75	20.7	20.71	20.0±1.0
	16QAM	1	0	20.57	20.44	20.41	20.0±1.0
		1	13	20.44	20.55	20.48	
		1	24	20.43	20.39	20.58	
		12	0	20.08	20	20.28	19.5±1.0
		12	6	20.23	20.24	20.16	
		12	13	20.26	20.23	20.09	
		25	0	19.92	19.95	19.94	19.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	21.5	21.48	21.46	20.5±1.0
		1	25	21.44	21.38	21.45	
		1	49	21.28	21.38	21.2	
		25	0	21.11	20.98	20.95	20.5±1.0
		25	13	20.96	21.04	21.05	
		25	25	21.09	21.15	21.11	
		50	0	20.77	20.8	20.76	20.0±1.0
	16QAM	1	0	20.58	20.62	20.43	20.0±1.0
		1	25	20.6	20.38	20.55	
		1	49	20.41	20.6	20.59	
		25	0	20.24	20.09	20.23	19.5±1.0
		25	13	20.28	20.15	20.03	
		25	25	20.29	20.2	20.02	
		50	0	19.86	19.85	19.9	19.0±1.0



LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	21.38	21.42	21.4	20.5±1.0
		1	38	21.39	21.23	21.32	
		1	74	21.34	21.35	21.34	
		36	0	21.13	21.01	20.9	20.5±1.0
		36	18	20.86	21.05	20.99	
		36	39	20.93	21	21.06	
		75	0	20.72	20.75	20.76	20.0±1.0
	16QAM	1	0	20.52	20.46	20.43	20.0±1.0
		1	38	20.52	20.58	20.57	
		1	74	20.62	20.56	20.35	
		36	0	20.1	20.12	20.21	19.5±1.0
		36	18	20.11	20.12	20.21	
		36	39	20.09	20.27	20.18	
		75	0	19.9	19.89	19.88	19.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	21.38	21.43	21.58	21.0±1.0
		1	50	21.2	21.43	21.31	
		1	99	21.31	21.35	21.35	
		50	0	20.95	21.	20.94	20.5±1.0
		50	25	21.04	21.03	20.94	
		50	50	21.08	20.91	20.85	
		100	0	20.7	20.75	20.71	20.0±1.0
	16QAM	1	0	20.37	20.58	20.42	20.0±1.0
		1	50	20.65	20.45	20.49	
		1	99	20.36	20.54	20.62	
		50	0	20.16	20.12	20.13	19.5±1.0
		50	25	20.09	20.24	20.18	
		50	50	20.09	20.28	20.29	
		100	0	19.86	19.86	19.9	19.0±1.0

3. LTE Band 12 Conducted Power Test Verdict:

LTE FDD Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	21.86	21.78	21.83	21.0±1.0
		1	3	21.83	21.75	21.63	
		1	5	21.64	21.83	21.88	
		3	0	21.36	21.39	21.44	20.5±1.0
		3	2	21.21	21.4	21.46	
		3	3	21.39	21.49	21.43	
		6	0	21.07	21.08	21.15	20.5±1.0
	16QAM	1	0	20.8	20.98	20.77	20.0±1.0
		1	3	20.72	20.91	20.9	
		1	5	20.7	20.98	20.87	
		3	0	20.54	20.55	20.47	20.0±1.0
		3	2	20.46	20.45	20.61	
		3	3	20.6	20.58	20.41	
		6	0	20.21	20.29	20.21	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	21.89	21.78	21.6	21.0±1.0
		1	7	21.88	21.85	21.65	
		1	14	21.69	21.79	21.79	
		8	0	21.5	21.36	21.3	20.5±1.0
		8	4	21.2	21.42	21.27	
		8	7	21.23	21.4	21.36	
		15	0	21.15	21.14	21.1	20.5±1.0
	16QAM	1	0	20.75	20.94	20.78	20.0±1.0
		1	7	20.7	20.78	20.71	
		1	14	20.99	20.85	20.99	
		8	0	20.51	20.42	20.46	20.0±1.0
		8	4	20.46	20.61	20.38	
		8	7	20.58	20.52	20.37	
		15	0	20.21	20.3	20.26	19.5±1.0



LTE FDD Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	21.84	21.68	21.87	21.0±1.0
		1	13	21.85	21.71	21.81	
		1	24	21.64	21.73	21.76	
		12	0	21.28	21.43	21.2	20.5±1.0
		12	6	21.49	21.41	21.28	
		12	13	21.31	21.38	21.31	
		25	0	21.07	21.05	21.11	20.5±1.0
	16QAM	1	0	20.73	20.75	20.83	20.0±1.0
		1	13	20.98	20.96	20.97	
		1	24	20.72	20.77	20.76	
		12	0	20.59	20.58	20.36	20.0±1.0
		12	6	20.44	20.46	20.48	
		12	13	20.65	20.56	20.48	
		25	0	20.25	20.3	20.22	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	21.92	21.97	21.88	21.0±1.0
		1	25	21.76	21.66	21.62	
		1	49	21.8	21.7	21.6	
		25	0	21.4	21.49	21.22	20.5±1.0
		25	13	21.23	21.37	21.26	
		25	25	21.34	21.35	21.31	
		50	0	21.06	21.08	21.08	20.5±1.0
	16QAM	1	0	20.83	20.96	20.75	20.0±1.0
		1	25	20.73	20.72	20.77	
		1	49	20.72	20.74	20.97	
		25	0	20.36	20.53	20.57	20.0±1.0
		25	13	20.48	20.44	20.45	
		25	25	20.62	20.62	20.51	
		50	0	20.24	20.21	20.28	19.5±1.0



6. LTE Band 17 Conducted Power Test Verdict:

LTE FDD Band 17				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	21.67	21.63	21.49	21.0±1.0
		1	13	21.56	21.42	21.61	
		1	24	21.65	21.66	21.59	
		12	0	21.34	21.15	21.21	20.5±1.0
		12	6	21.31	21.13	21.08	
		12	13	21.34	21.29	21.35	
		25	0	20.9	20.99	20.98	20.0±1.0
	16QAM	1	0	20.61	20.84	20.65	20.0±1.0
		1	13	20.56	20.63	20.66	
		1	24	20.55	20.56	20.58	
		12	0	20.48	20.41	20.48	19.5±1.0
		12	6	20.24	20.5	20.47	
		12	13	20.24	20.26	20.42	
		25	0	20.11	20.15	20.05	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	21.67	21.74	21.63	21.0±1.0
		1	25	21.44	21.66	21.5	
		1	49	21.63	21.55	21.67	
		25	0	21.16	21.23	21.08	20.5±1.0
		25	13	21.22	21.18	21.17	
		25	25	21.12	21.08	21.11	
		50	0	20.99	20.98	21	20.0±1.0
	16QAM	1	0	20.85	20.82	20.64	20.0±1.0
		1	25	20.8	20.79	20.76	
		1	49	20.55	20.7	20.66	
		25	0	20.38	20.5	20.23	19.5±1.0
		25	13	20.33	20.35	20.35	
		25	25	20.43	20.35	20.45	
		50	0	20.08	20.05	20.06	19.5±1.0



7. LTE Band 41 Conducted Power Test Verdict:

LTE TDD Band 41				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				39675/2498.5	40620/2593	41565/2687.5	
5MHz	QPSK	1	0	21.61	21.66	21.61	21.0±1.0
		1	13	21.45	21.68	21.56	
		1	24	21.47	21.65	21.42	
		12	0	21.25	21.1	21.06	20.5±1.0
		12	6	21.23	21.14	21.34	
		12	13	21.19	21.22	21.35	
		25	0	20.92	20.97	20.97	20.0±1.0
	16QAM	1	0	20.66	20.65	20.78	20.0±1.0
		1	13	20.68	20.55	20.84	
		1	24	20.69	20.84	20.8	
		12	0	20.34	20.26	20.27	19.5±1.0
		12	6	20.46	20.41	20.34	
		12	13	20.29	20.23	20.36	
		25	0	20.14	20.13	20.13	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				39700/2501	40620/2593	41540/2685	
10MHz	QPSK	1	0	21.55	21.59	21.68	21.0±1.0
		1	25	21.69	21.61	21.42	
		1	49	21.5	21.63	21.4	
		25	0	21.05	21.07	21.13	20.5±1.0
		25	13	21.1	21.26	21.24	
		25	25	21.21	21.23	21.34	
		50	0	20.96	20.92	20.9	20.0±1.0
	16QAM	1	0	20.81	20.72	20.68	20.0±1.0
		1	25	20.71	20.74	20.62	
		1	49	20.57	20.66	20.75	
		25	0	20.37	20.28	20.44	19.5±1.0
		25	13	20.38	20.42	20.38	
		25	25	20.4	20.33	20.22	
		50	0	20.08	20.15	20.14	19.5±1.0




LTE TDD Band 41				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				39725/2503.5	40620/2593	41515/2682.5	
15MHz	QPSK	1	0	21.55	21.65	21.47	21.0±1.0
		1	38	21.6	21.66	21.47	
		1	74	21.5	21.41	21.47	
		36	0	21.17	21.08	21.1	20.5±1.0
		36	18	21.23	21.27	21.31	
		36	39	21.17	21.18	21.1	
		75	0	20.92	20.92	20.91	20.0±1.0
	16QAM	1	0	20.69	20.82	20.74	20.0±1.0
		1	38	20.8	20.84	20.67	
		1	74	20.63	20.58	20.56	
		36	0	20.24	20.25	20.3	19.5±1.0
		36	18	20.39	20.36	20.29	
		36	39	20.3	20.23	20.38	
		75	0	20.07	20.14	20.13	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				39750/2506	40620/2593	41490/2680	
20MHz	QPSK	1	0	21.5	21.71	21.32	21.0±1.0
		1	50	21.68	21.69	21.5	
		1	99	21.63	21.42	21.67	
		50	0	21.11	21.35	21.15	20.5±1.0
		50	25	21.13	21.12	21.34	
		50	50	21.07	21.26	21.08	
		100	0	20.91	20.9	20.94	20.0±1.0
	16QAM	1	0	20.75	20.68	20.57	20.0±1.0
		1	50	20.69	20.55	20.76	
		1	99	20.73	20.8	20.79	
		50	0	20.3	20.33	20.35	19.5±1.0
		50	25	20.44	20.41	20.44	
		50	50	20.31	20.44	20.35	
		100	0	20.11	20.14	20.11	19.5±1.0


**Peak To Average Ratio****Test Result and Data**

PeakToAveragePowerRatio NormalTC_NormalVol							
Band	Range	BandWidth	RbMode	Modulation	PAPR (dBm)	Limit (dBm)	Result
FDD02	LowRange	20	OneRB_high	Q16	4.35	13.00	Pass
FDD02	LowRange	20	fullRB	Q16	5.99	13.00	Pass
FDD02	MidRange	20	OneRB_high	Q16	4.58	13.00	Pass
FDD02	MidRange	20	fullRB	Q16	5.85	13.00	Pass
FDD02	HighRange	20	OneRB_high	Q16	4.30	13.00	Pass
FDD02	HighRange	20	fullRB	Q16	5.88	13.00	Pass
FDD04	LowRange	20	OneRB_high	Q16	5.23	13.00	Pass
FDD04	LowRange	20	fullRB	Q16	5.78	13.00	Pass
FDD04	MidRange	20	OneRB_high	Q16	5.20	13.00	Pass
FDD04	MidRange	20	fullRB	Q16	5.95	13.00	Pass
FDD04	HighRange	20	OneRB_high	Q16	4.63	13.00	Pass
FDD04	HighRange	20	fullRB	Q16	5.80	13.00	Pass


FDD02_LowRange_20MHz_1860_OneRB
_high_Q16

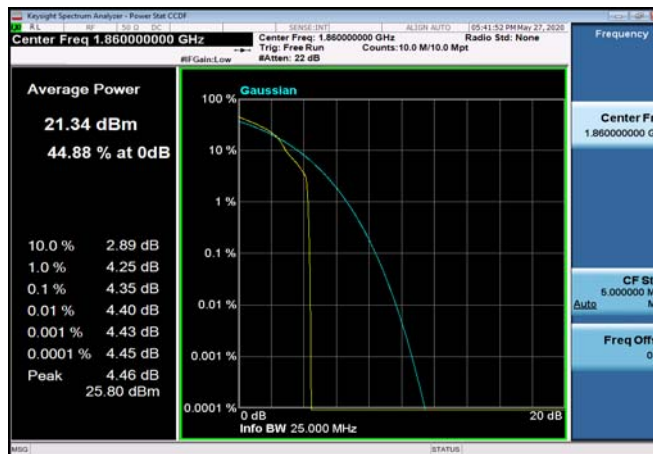


FDD02_LowRange_20MHz_1860_fullRB
_Q16

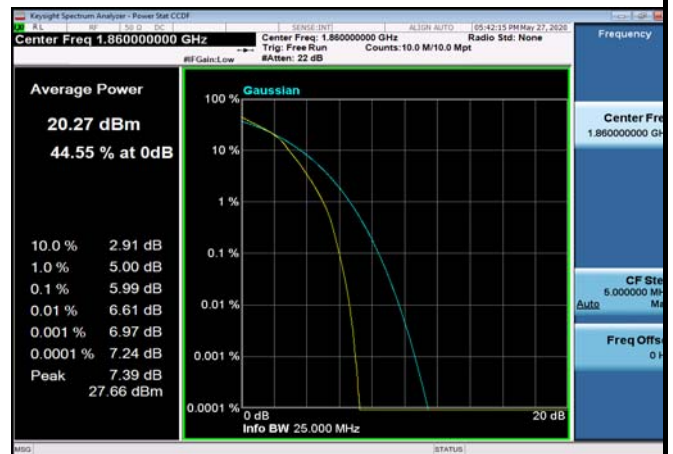

FDD02_MidRange_20MHz_1880_OneRB
_high_Q16

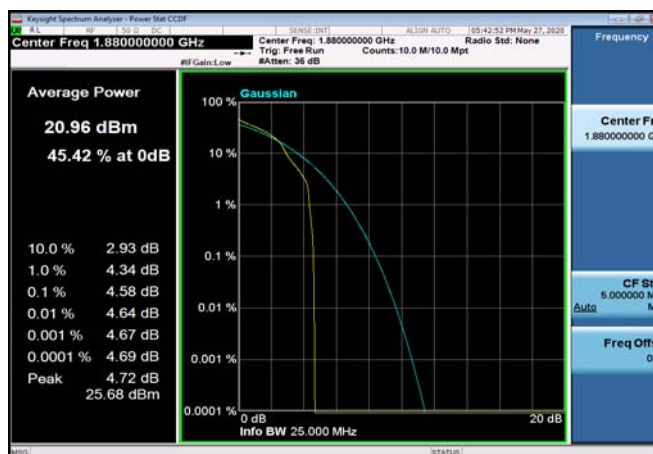

FDD02_MidRange_20MHz_1880_fullRB
_Q16

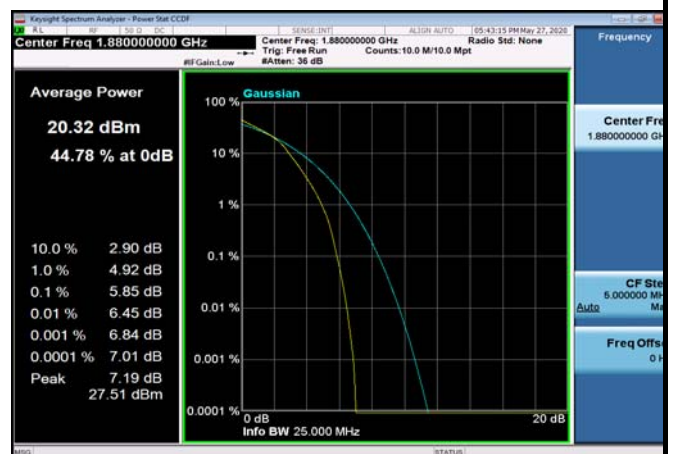


FDD02_HighRange_20MHz_1900_OneRB
_high_Q16




FDD02_HighRange_20MHz_1900_fullRB
_Q16




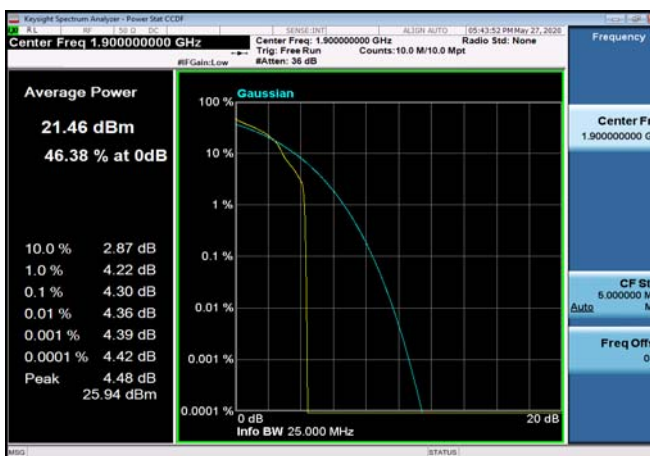


FDD04_LowRange_20MHz_1720_OneRB
_high_Q16

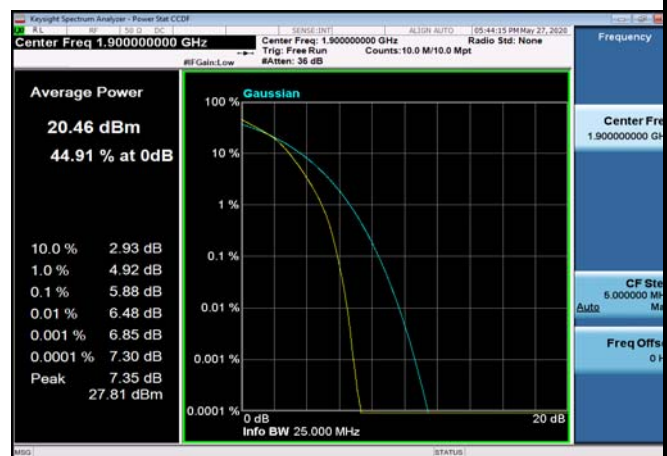


FDD04_LowRange_20MHz_1720_fullRB
_Q16

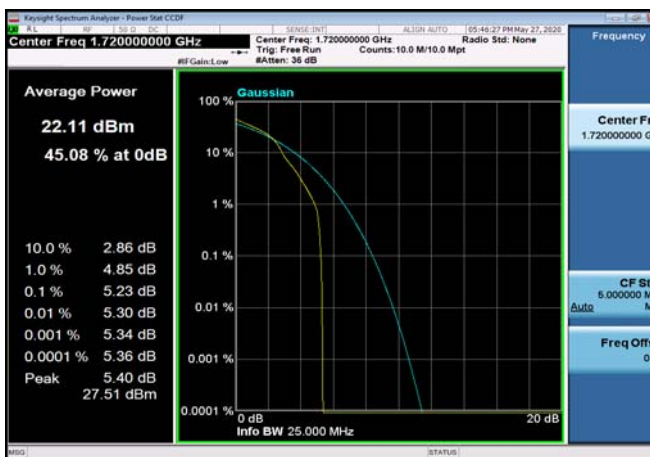


FDD04_MidRange_20MHz_1732.5_OneRB
_high_Q16

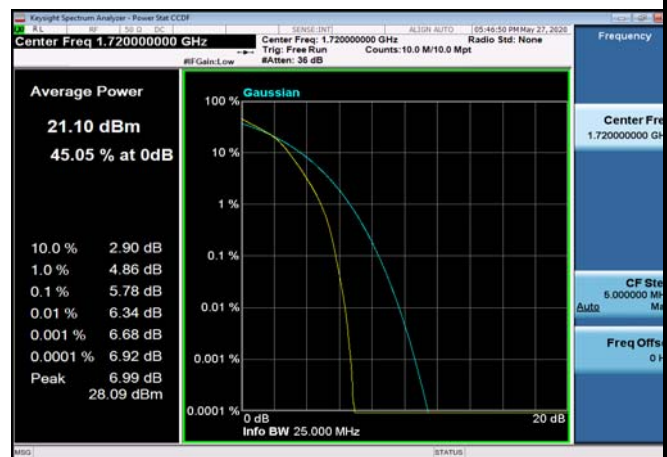


FDD04_MidRange_20MHz_1732.5_fullRB
_Q16

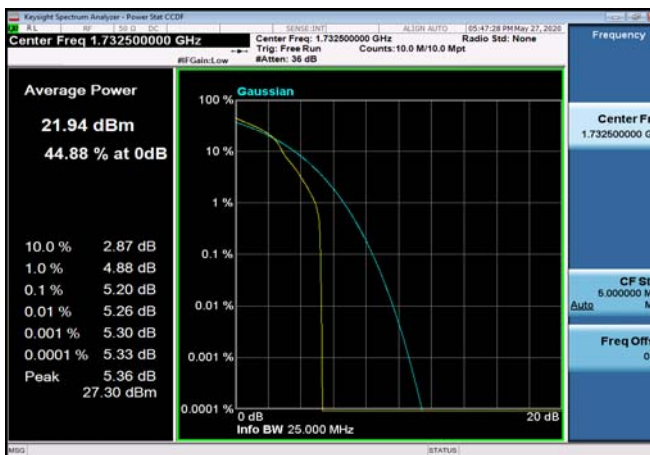

FDD04_HighRange_20MHz_1745_OneRB
_high_Q16

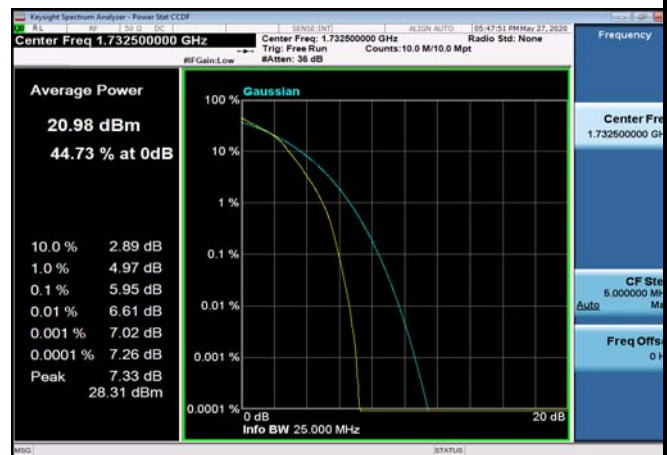

FDD04_HighRange_20MHz_1745_fullRB
_Q16

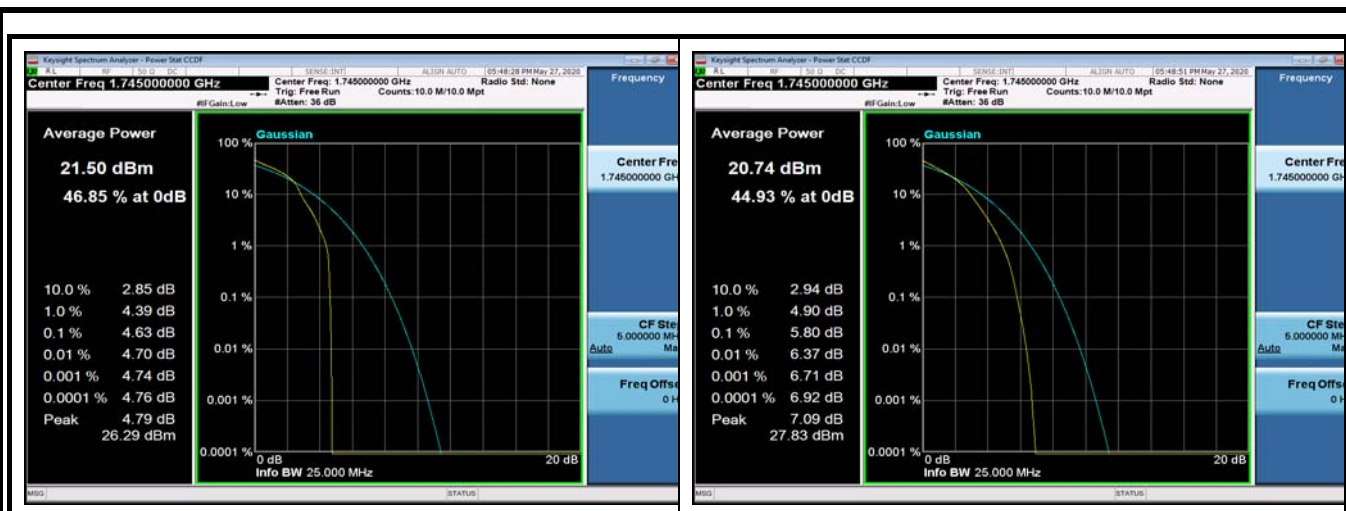

99% Occupied Bandwidth

Test Result and Data


Occupied Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	Occupied Bandwidth(99%) (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.091
FDD02	MidRange	1.4	1880	Q16	1.087
FDD02	MidRange	3	1880	QPSK	2.677
FDD02	MidRange	3	1880	Q16	2.677
FDD02	MidRange	5	1880	QPSK	4.490
FDD02	MidRange	5	1880	Q16	4.488
FDD02	MidRange	10	1880	QPSK	8.922
FDD02	MidRange	10	1880	Q16	8.915
FDD02	MidRange	15	1880	QPSK	13.444
FDD02	MidRange	15	1880	Q16	13.443
FDD02	MidRange	20	1880	QPSK	17.869
FDD02	MidRange	20	1880	Q16	17.865
FDD04	MidRange	1.4	1732.5	QPSK	1.086
FDD04	MidRange	1.4	1732.5	Q16	1.085
FDD04	MidRange	3	1732.5	QPSK	2.68
FDD04	MidRange	3	1732.5	Q16	2.678
FDD04	MidRange	5	1732.5	QPSK	4.489




FDD04	MidRange	5	1732.5	Q16	4.488
FDD04	MidRange	10	1732.5	QPSK	8.924
FDD04	MidRange	10	1732.5	Q16	8.917
FDD04	MidRange	15	1732.5	QPSK	13.456
FDD04	MidRange	15	1732.5	Q16	13.456
FDD04	MidRange	20	1732.5	QPSK	17.901
FDD04	MidRange	20	1732.5	Q16	17.898
FDD12	MidRange	1.4	707.5	QPSK	1.085
FDD12	MidRange	1.4	707.5	Q16	1.084
FDD12	MidRange	3	707.5	QPSK	2.677
FDD12	MidRange	3	707.5	Q16	2.678
FDD12	MidRange	5	707.5	QPSK	4.491
FDD12	MidRange	5	707.5	Q16	4.489
FDD12	MidRange	10	707.5	QPSK	8.928
FDD12	MidRange	10	707.5	Q16	8.923
FDD17	MidRange	5	710	QPSK	4.485
FDD17	MidRange	5	710	Q16	4.489
FDD17	MidRange	10	710	QPSK	8.921
FDD17	MidRange	10	710	Q16	8.912
TDD41	MidRange	5	2593	QPSK	4.481
TDD41	MidRange	5	2593	Q16	4.484
TDD41	MidRange	10	2593	QPSK	8.907
TDD41	MidRange	10	2593	Q16	8.919
TDD41	MidRange	15	2593	QPSK	13.438
TDD41	MidRange	15	2593	Q16	13.434
TDD41	MidRange	20	2593	QPSK	17.866
TDD41	MidRange	20	2593	Q16	17.859




FDD02_MidRange_1.4_1880_QPSK

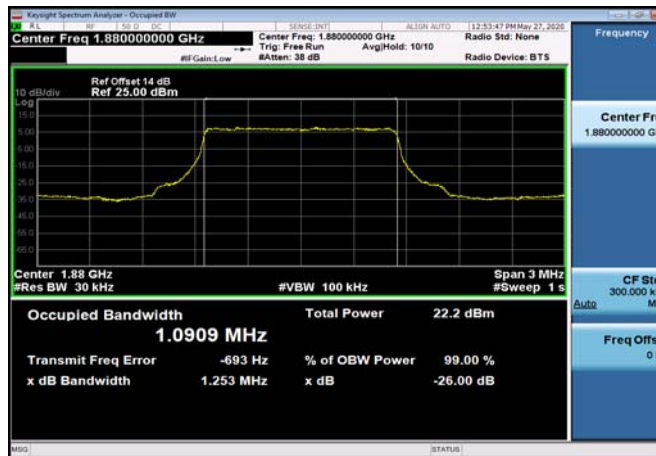


FDD02_MidRange_1.4_1880_Q16

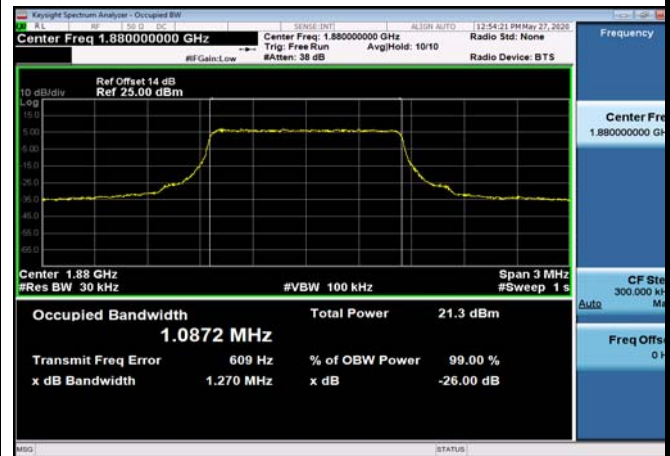


FDD02_MidRange_3_1880_QPSK

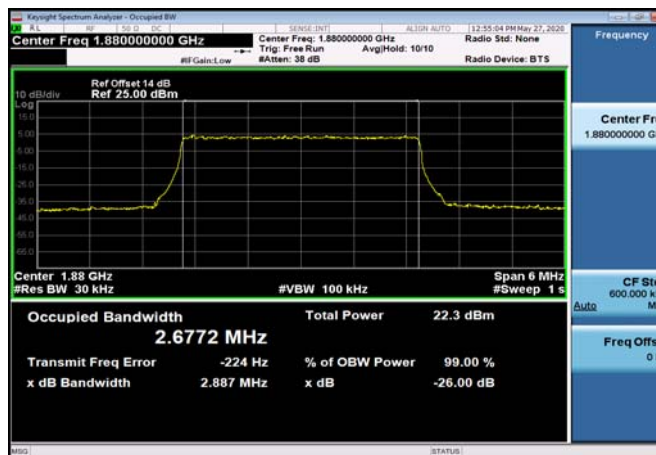


FDD02_MidRange_3_1880_Q16

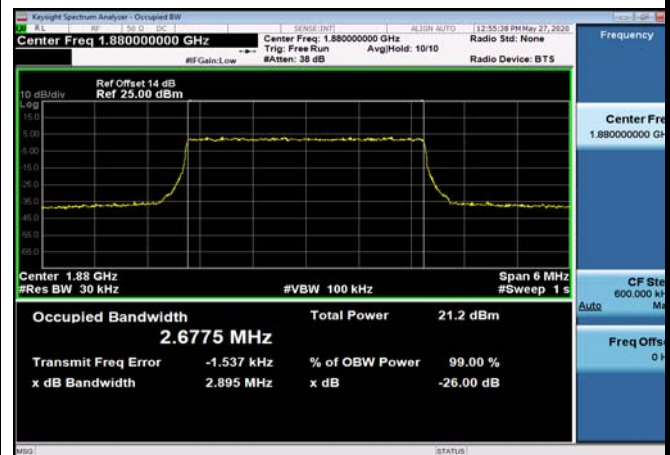

FDD02_MidRange_5_1880_QPSK

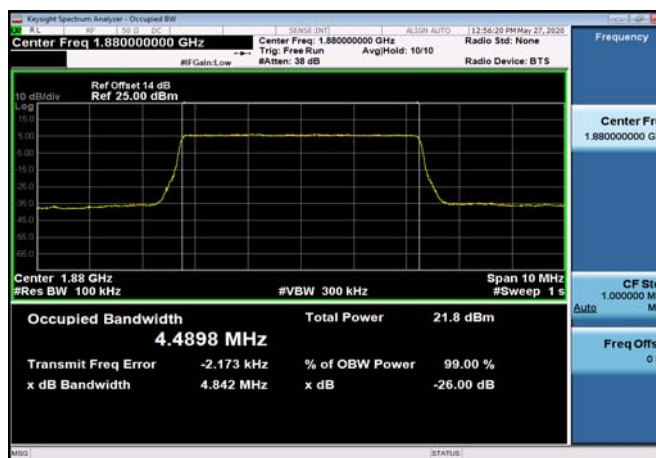


FDD02_MidRange_5_1880_Q16

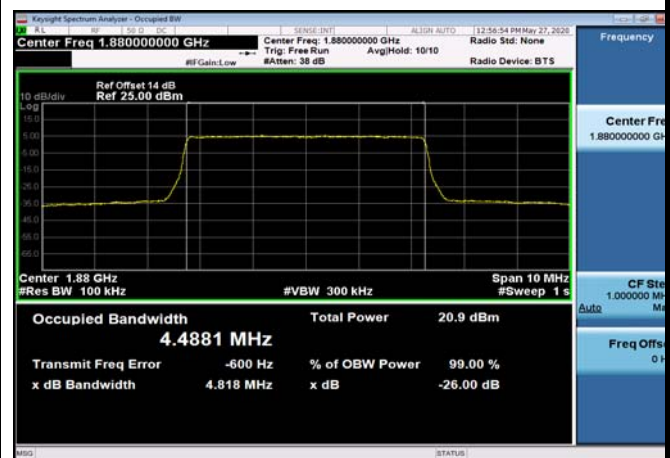





FDD02_MidRange_10_1880_QPSK

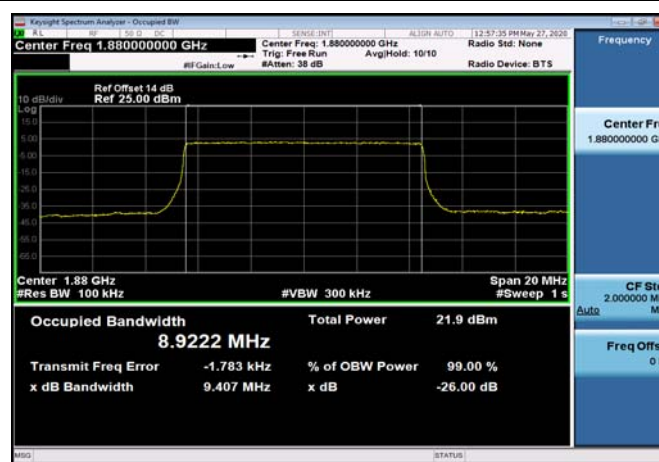


FDD02_MidRange_10_1880_Q16

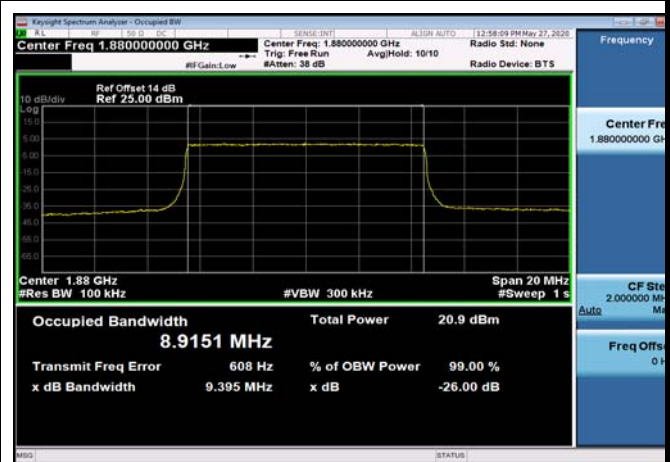


FDD02_MidRange_15_1880_QPSK

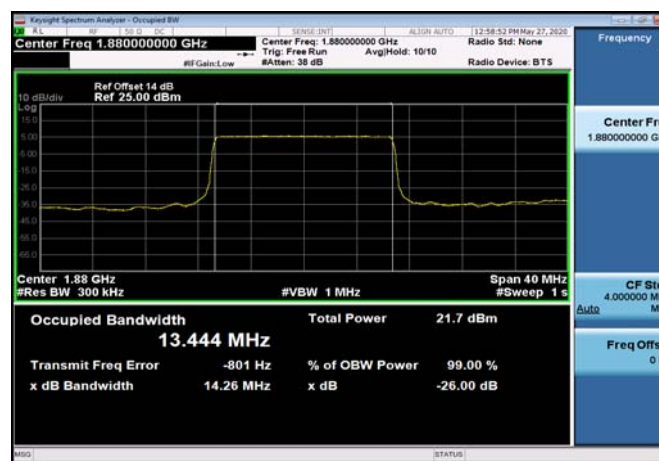


FDD02_MidRange_15_1880_Q16

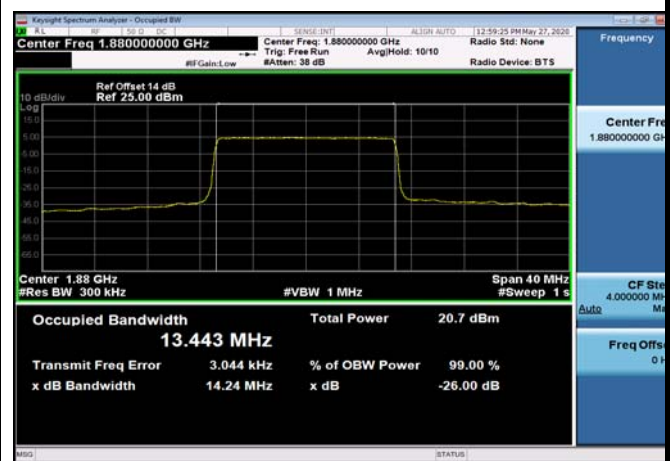

FDD02_MidRange_20_1880_QPSK

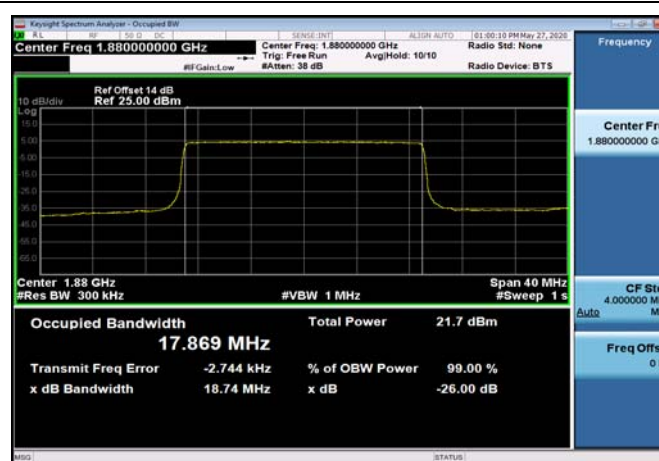

FDD02_MidRange_20_1880_Q16

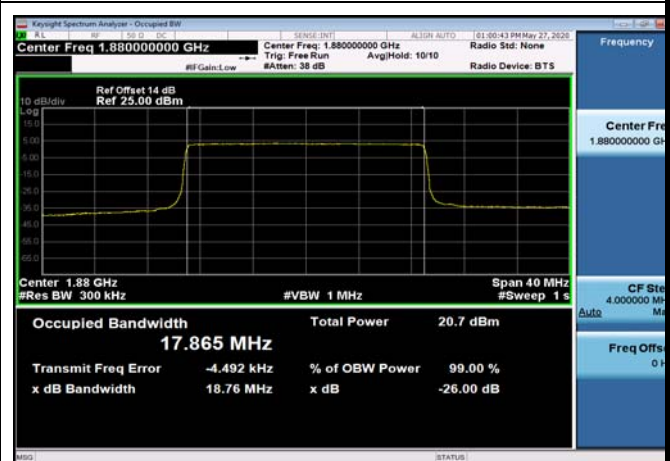





FDD04_MidRange_1.4_1732.5_QPSK




FDD04_MidRange_1.4_1732.5_Q16

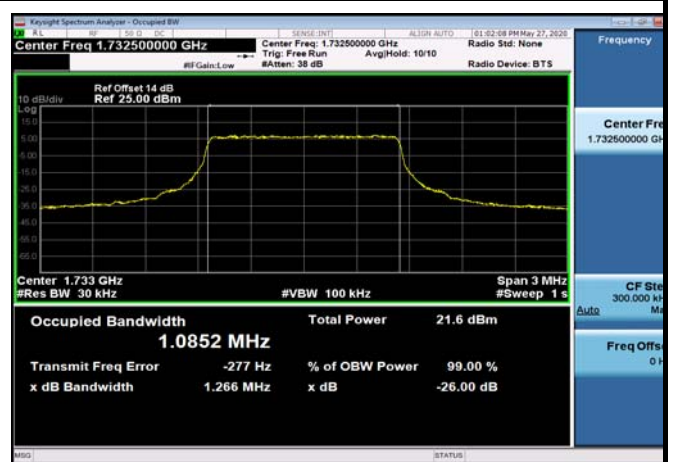


FDD04_MidRange_3_1732.5_QPSK

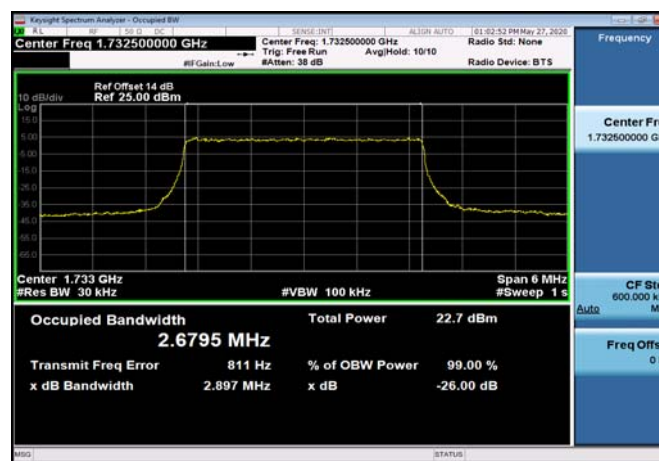


FDD04_MidRange_3_1732.5_Q16

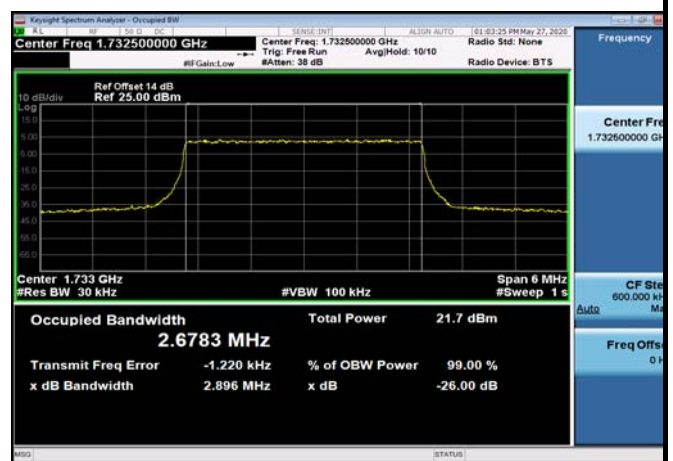

FDD04_MidRange_5_1732.5_QPSK

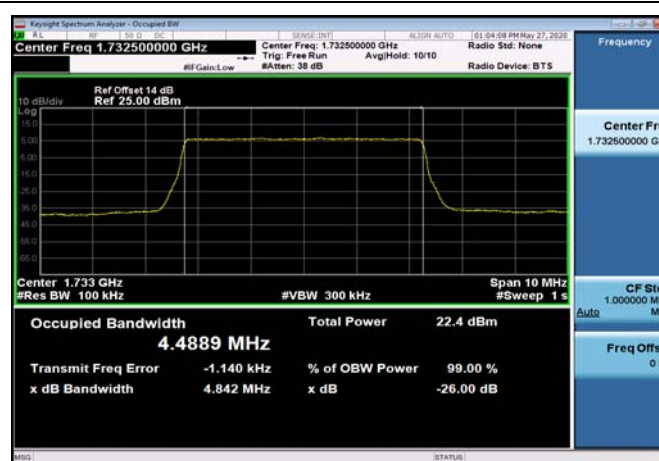


FDD04_MidRange_5_1732.5_Q16

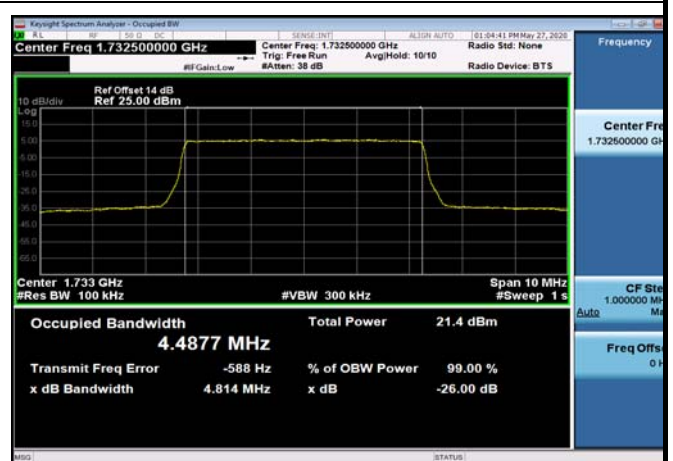




FDD04_MidRange_10_1732.5_QPSK

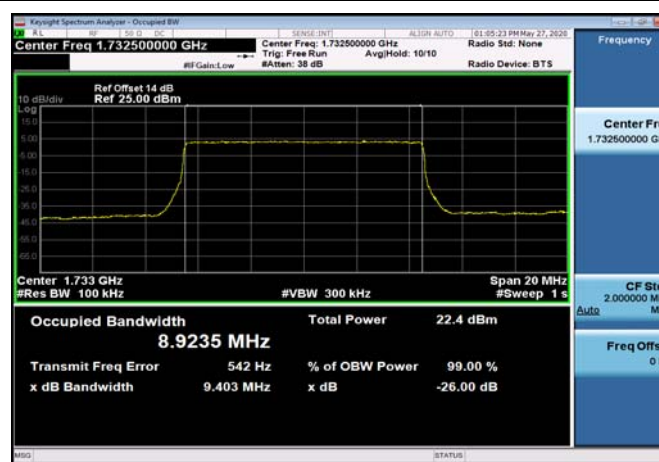


FDD04_MidRange_10_1732.5_Q16




FDD04_MidRange_15_1732.5_QPSK

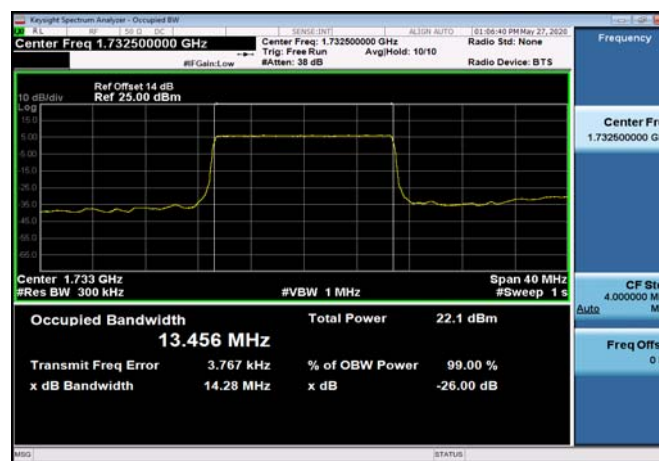


FDD04_MidRange_15_1732.5_Q16

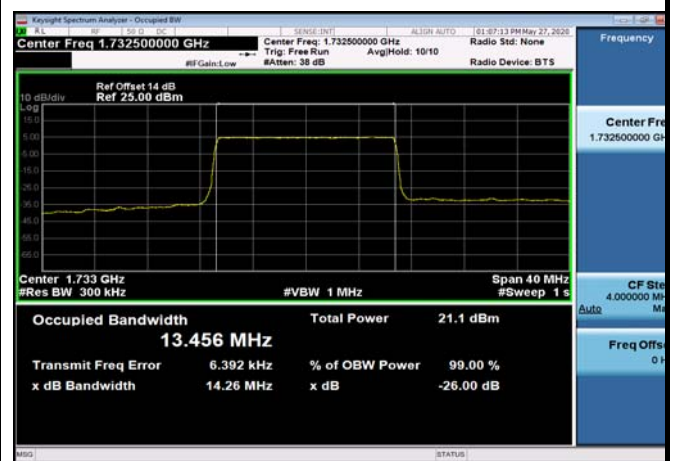

FDD04_MidRange_20_1732.5_QPSK

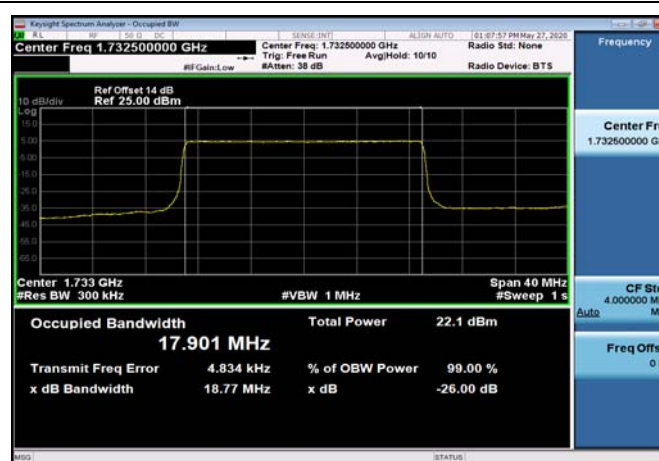

FDD04_MidRange_20_1732.5_Q16

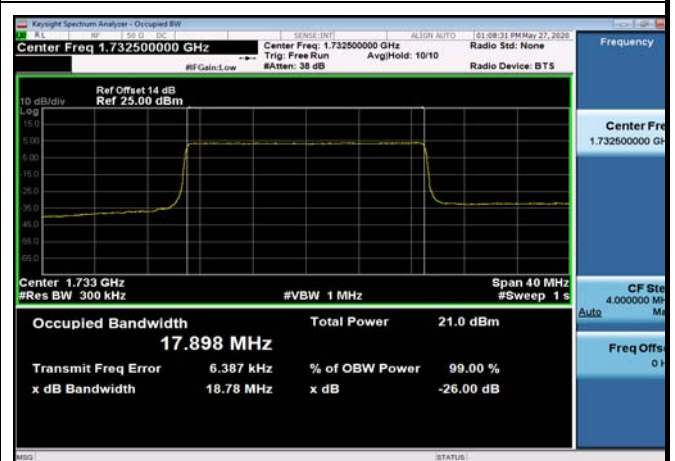





FDD12_MidRange_1.4_707.5_QPSK




FDD12_MidRange_1.4_707.5_Q16

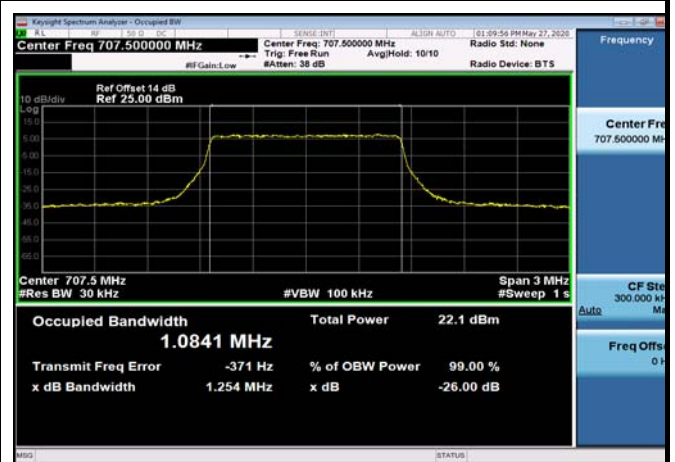


FDD12_MidRange_3_707.5_QPSK

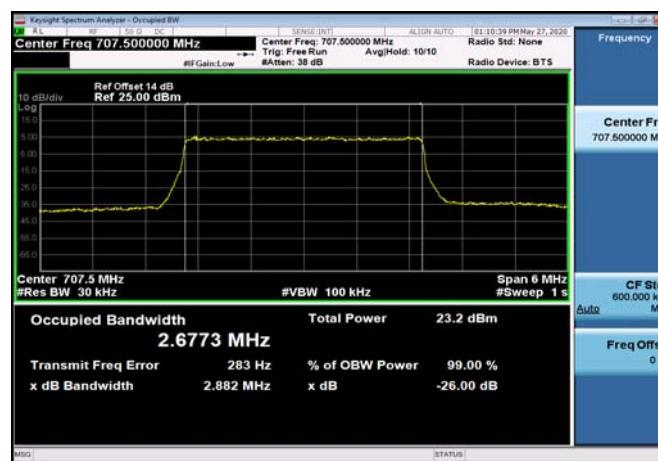


FDD12_MidRange_3_707.5_Q16

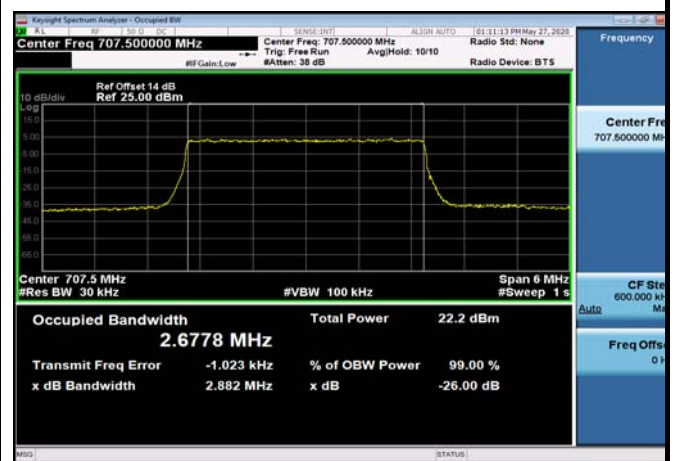

FDD12_MidRange_5_707.5_QPSK

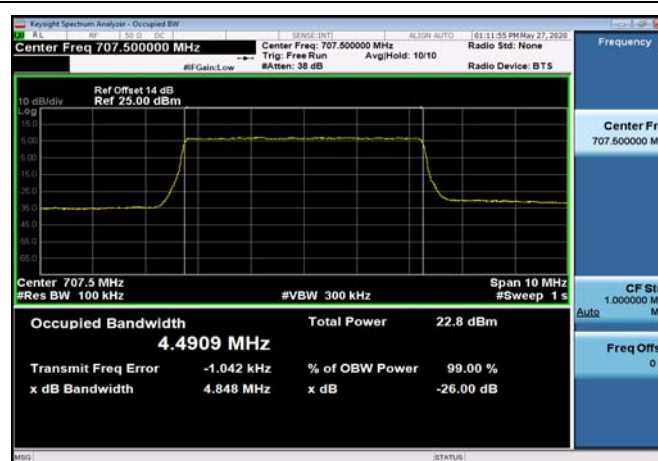

FDD12_MidRange_5_707.5_Q16

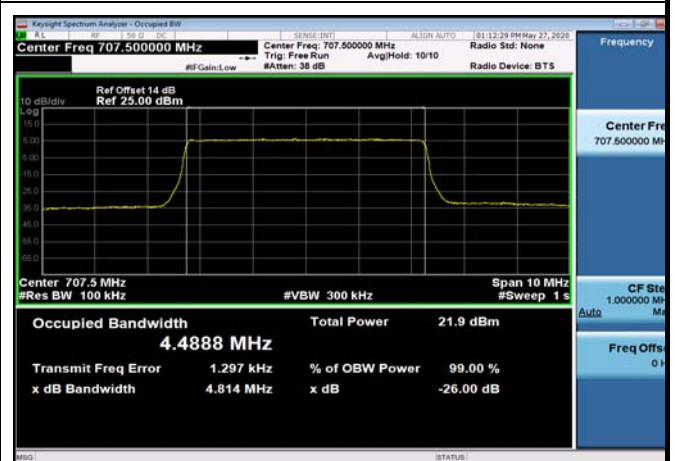





FDD12_MidRange_10_707.5_QPSK




FDD12_MidRange_10_707.5_Q16

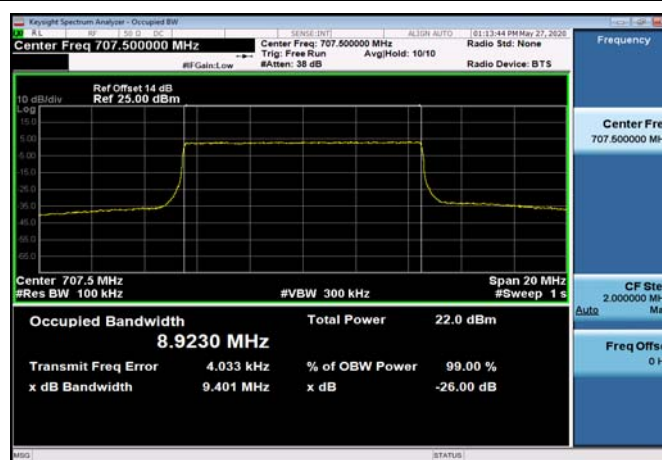


FDD17_MidRange_5_710_QPSK

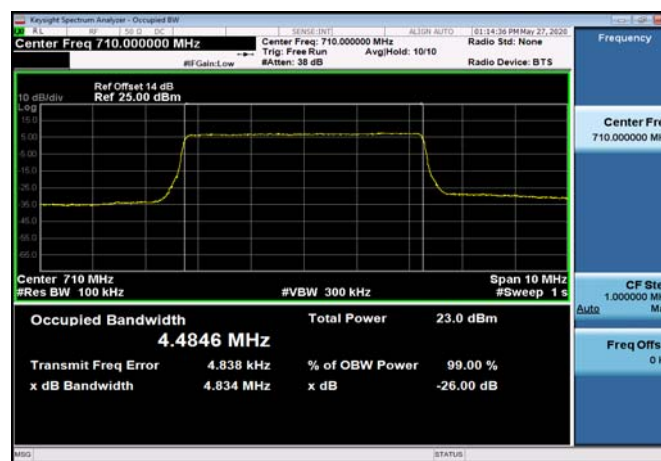


FDD17_MidRange_5_710_Q16

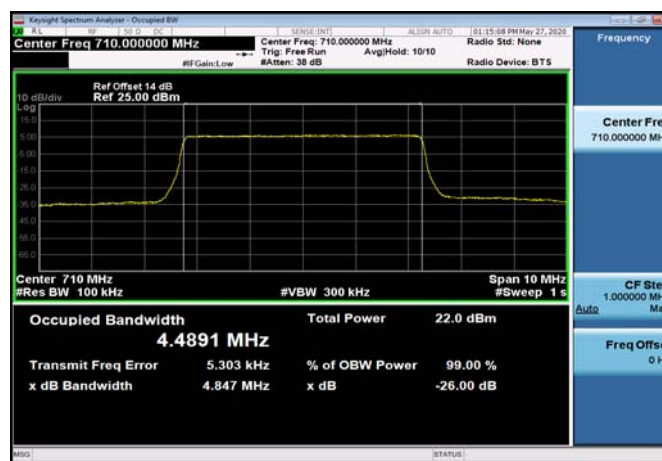

FDD17_MidRange_10_710_QPSK

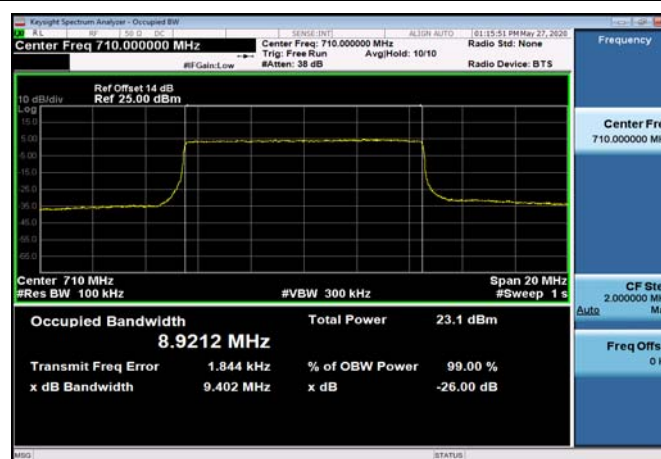

FDD17_MidRange_10_710_Q16

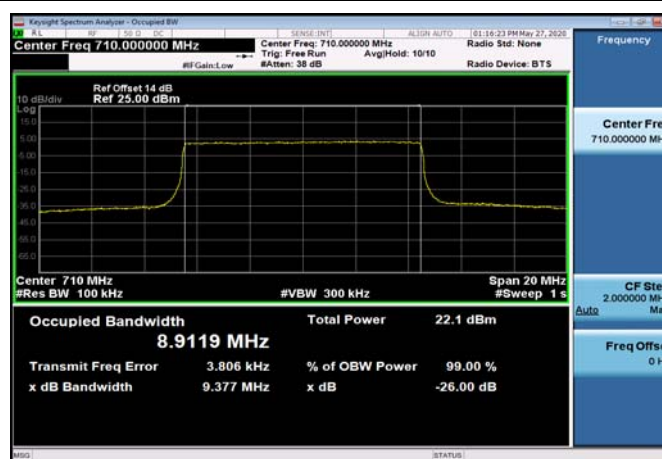





TDD41_MidRange_5_2593_QPSK




TDD41_MidRange_5_2593_Q16

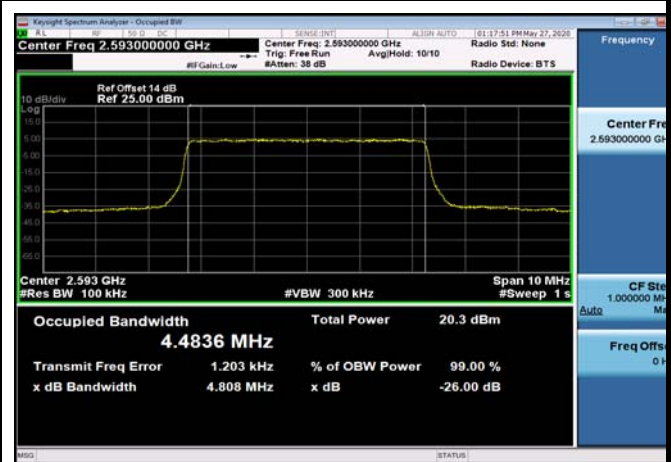


TDD41_MidRange_10_2593_QPSK

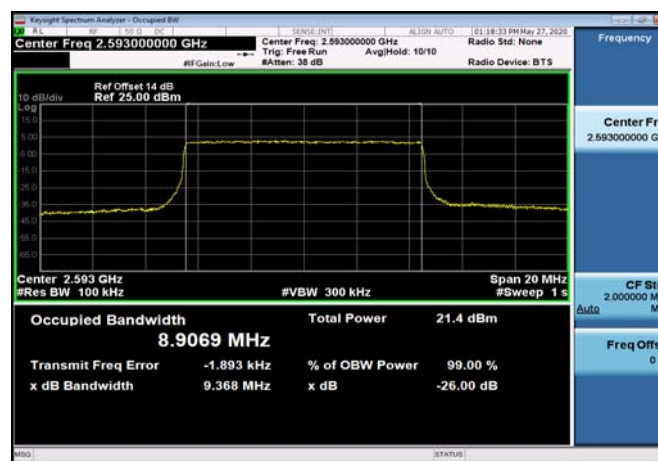


TDD41_MidRange_10_2593_Q16

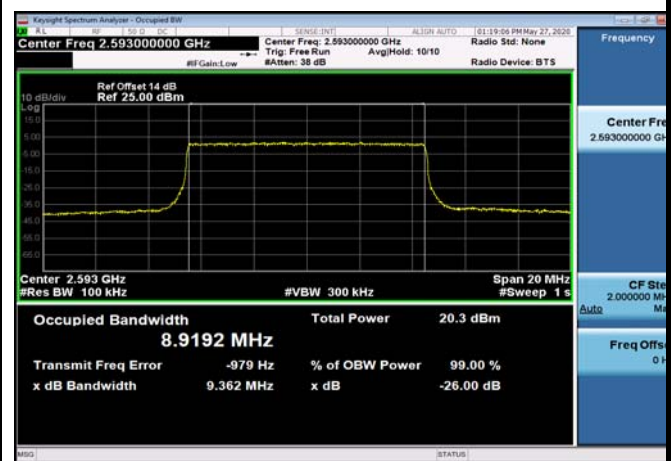

TDD41_MidRange_15_2593_QPSK

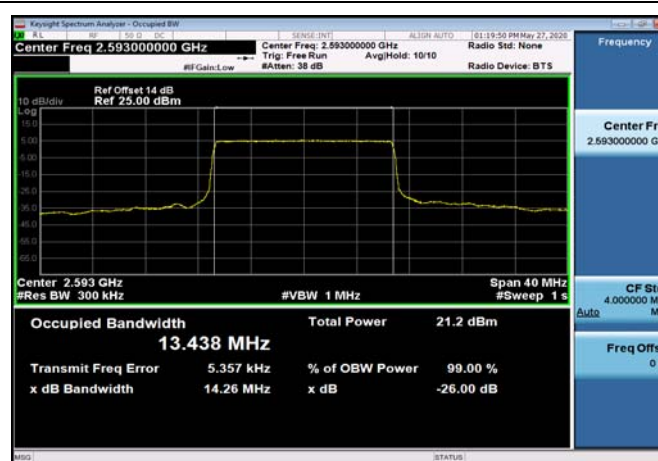


TDD41_MidRange_15_2593_Q16

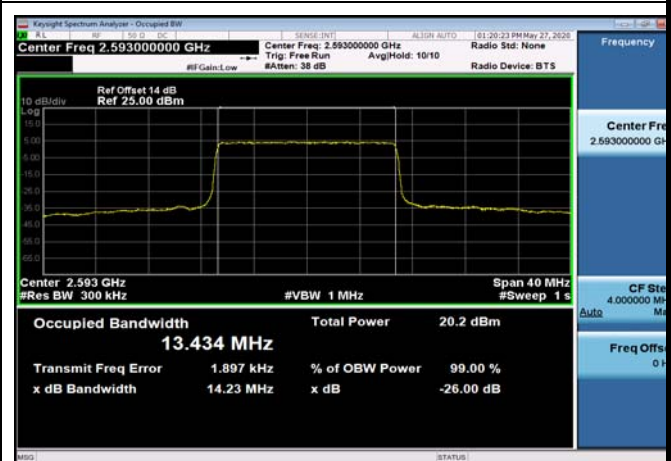




TDD41_MidRange_20_2593_QPSK

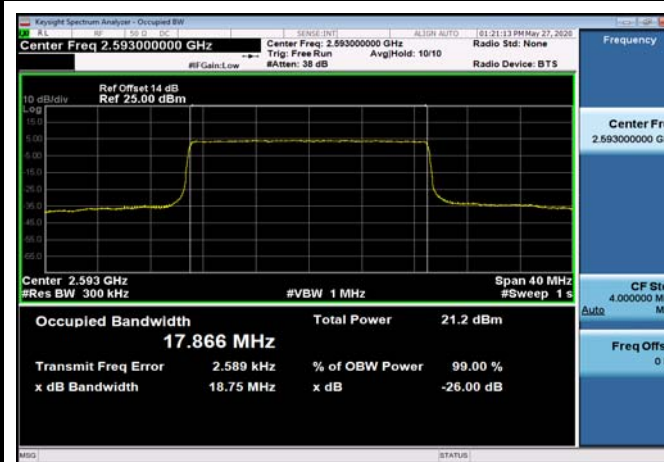

TDD41_MidRange_20_2593_Q16

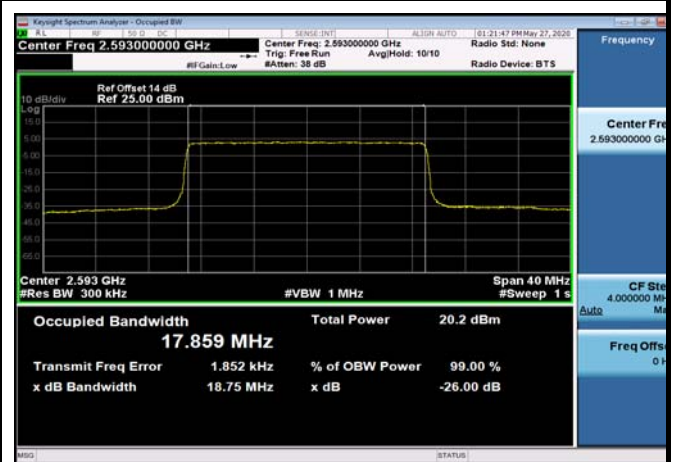

**26dB Bandwidth****Test Result and Data**


Emission Bandwidth NormalTC_NormalVol					
Band	Range	BandWidth	Frequency (MHz)	Modulation	EmissionBandwidth (MHz)
FDD02	MidRange	1.4	1880	QPSK	1.25
FDD02	MidRange	1.4	1880	Q16	1.27
FDD02	MidRange	3	1880	QPSK	2.97
FDD02	MidRange	3	1880	Q16	2.97
FDD02	MidRange	5	1880	QPSK	4.86
FDD02	MidRange	5	1880	Q16	4.82
FDD02	MidRange	10	1880	QPSK	9.43
FDD02	MidRange	10	1880	Q16	9.4
FDD02	MidRange	15	1880	QPSK	14.27
FDD02	MidRange	15	1880	Q16	14.25
FDD02	MidRange	20	1880	QPSK	18.75
FDD02	MidRange	20	1880	Q16	18.76
FDD04	MidRange	1.4	1732.5	QPSK	1.26
FDD04	MidRange	1.4	1732.5	Q16	1.27
FDD04	MidRange	3	1732.5	QPSK	2.98
FDD04	MidRange	3	1732.5	Q16	2.97
FDD04	MidRange	5	1732.5	QPSK	4.86
FDD04	MidRange	5	1732.5	Q16	4.81
FDD04	MidRange	10	1732.5	QPSK	9.38
FDD04	MidRange	10	1732.5	Q16	9.41
FDD04	MidRange	15	1732.5	QPSK	14.27
FDD04	MidRange	15	1732.5	Q16	14.26
FDD04	MidRange	20	1732.5	QPSK	18.77
FDD04	MidRange	20	1732.5	Q16	18.79
FDD12	MidRange	1.4	707.5	QPSK	1.25
FDD12	MidRange	1.4	707.5	Q16	1.26
FDD12	MidRange	3	707.5	QPSK	2.97



FDD12	MidRange	3	707.5	Q16	2.97
FDD12	MidRange	5	707.5	QPSK	4.85
FDD12	MidRange	5	707.5	Q16	4.81
FDD12	MidRange	10	707.5	QPSK	9.45
FDD12	MidRange	10	707.5	Q16	9.41
FDD17	MidRange	5	710	QPSK	4.84
FDD17	MidRange	5	710	Q16	4.84
FDD17	MidRange	10	710	QPSK	9.41
FDD17	MidRange	10	710	Q16	9.38
TDD41	MidRange	5	2593	QPSK	4.79
TDD41	MidRange	5	2593	Q16	4.81
TDD41	MidRange	10	2593	QPSK	9.38
TDD41	MidRange	10	2593	Q16	9.34
TDD41	MidRange	15	2593	QPSK	14.25
TDD41	MidRange	15	2593	Q16	14.23
TDD41	MidRange	20	2593	QPSK	18.75
TDD41	MidRange	20	2593	Q16	18.74




FDD02_MidRange_1.4MHz_1880MHz_QPSK

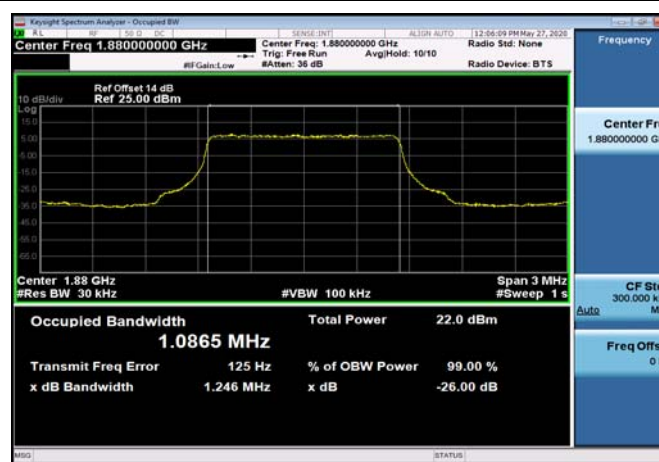


FDD02_MidRange_1.4MHz_1880MHz_Q16




FDD02_MidRange_3MHz_1880MHz_QPSK

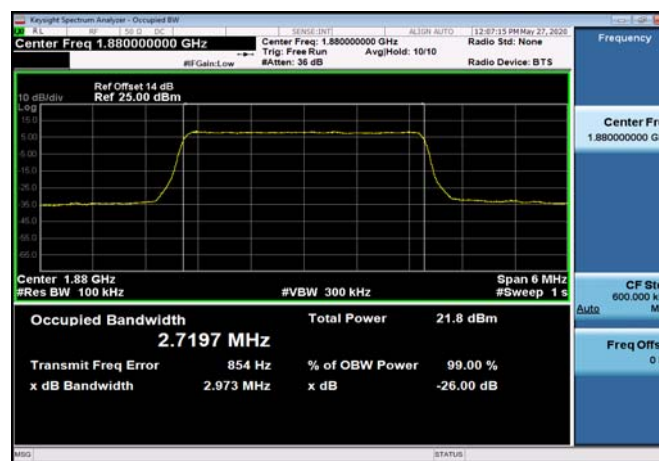


FDD02_MidRange_3MHz_1880MHz_Q16

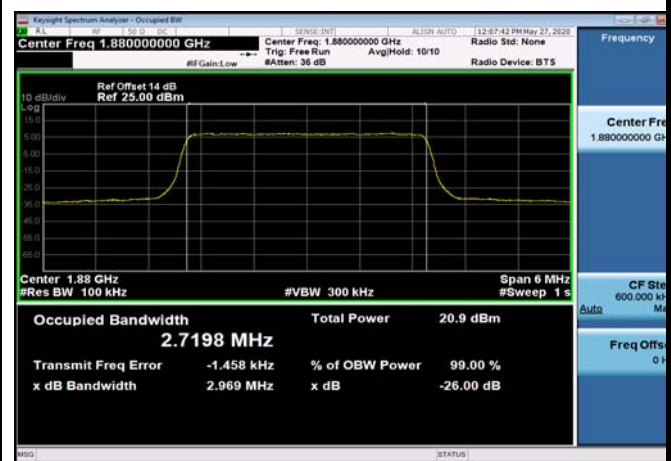

FDD02_MidRange_5MHz_1880MHz_QPSK

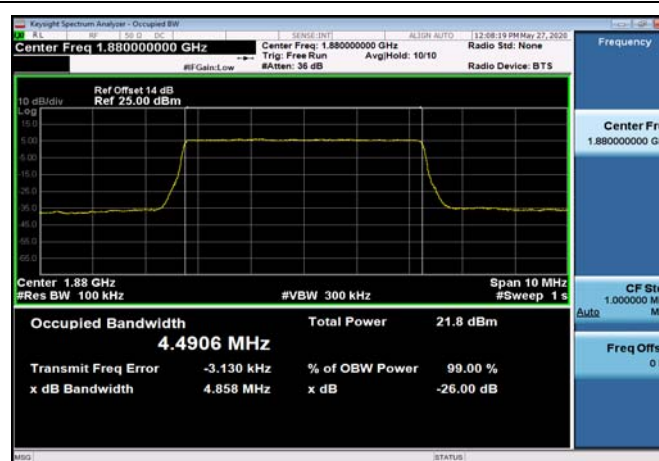


FDD02_MidRange_5MHz_1880MHz_Q16

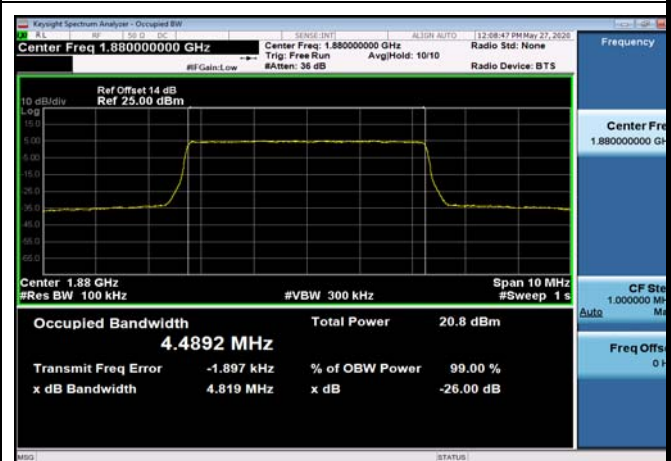





FDD02_MidRange_10MHz_1880MHz_QPSK

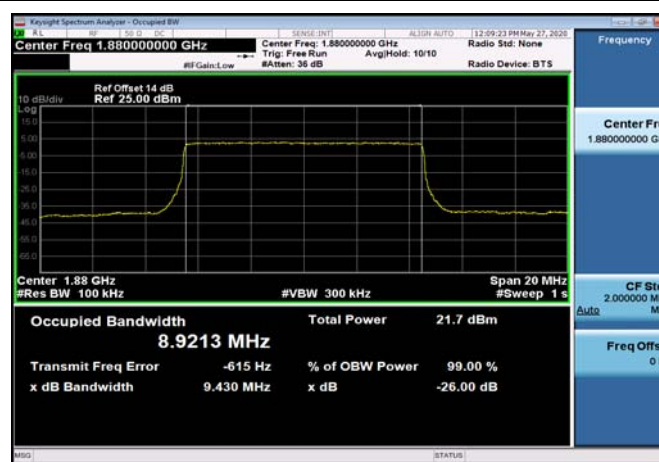


FDD02_MidRange_10MHz_1880MHz_Q16

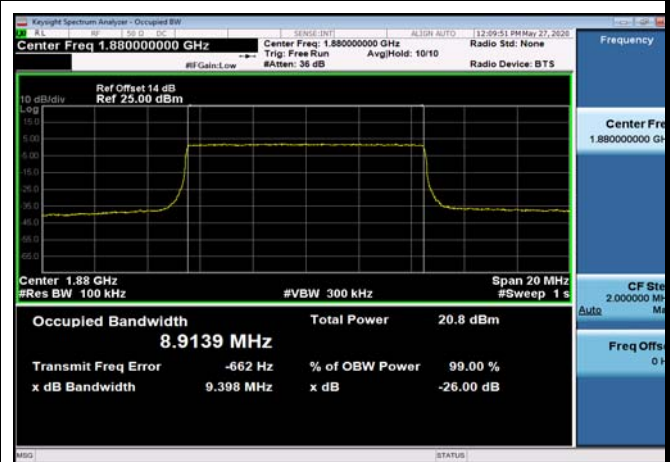


FDD02_MidRange_15MHz_1880MHz_QPSK

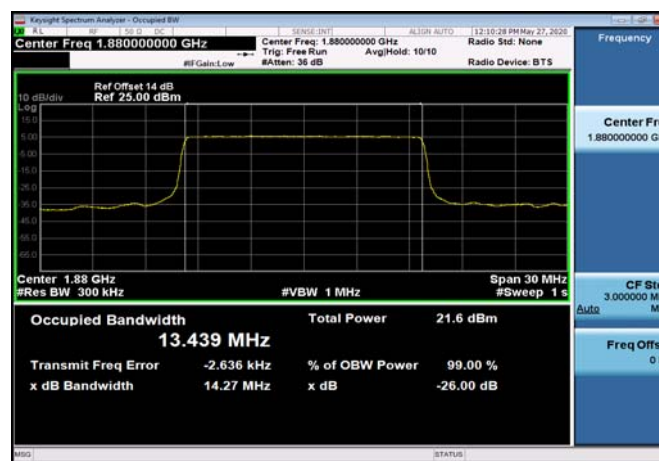


FDD02_MidRange_15MHz_1880MHz_Q16

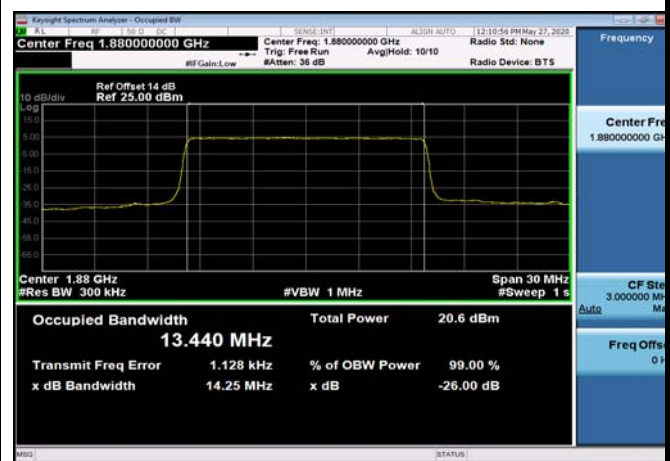

FDD02_MidRange_20MHz_1880MHz_QPSK

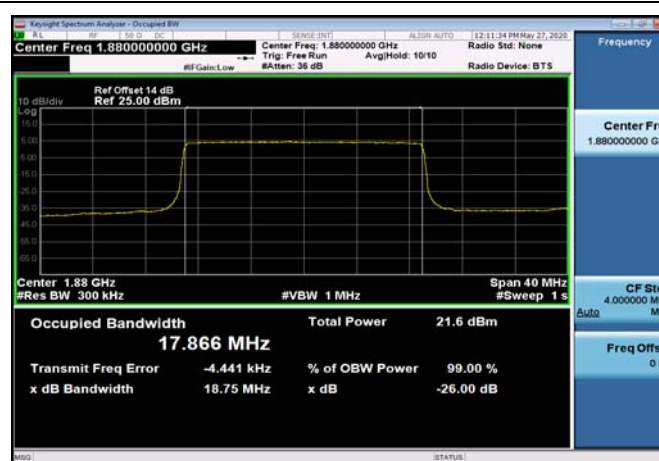


FDD02_MidRange_20MHz_1880MHz_Q16

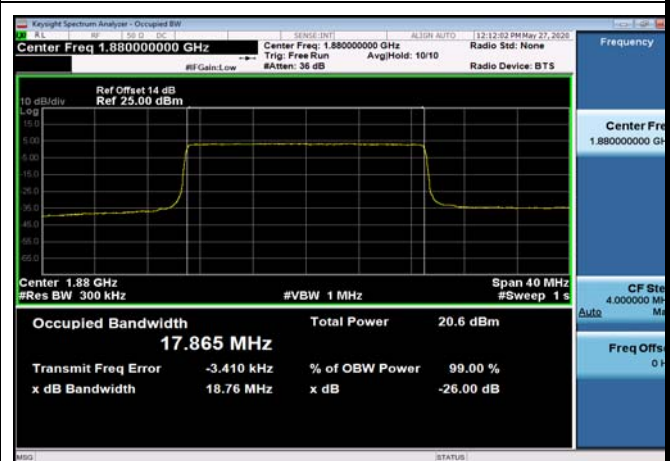





FDD04_MidRange_1.4MHz_1732.5MHz_QPSK

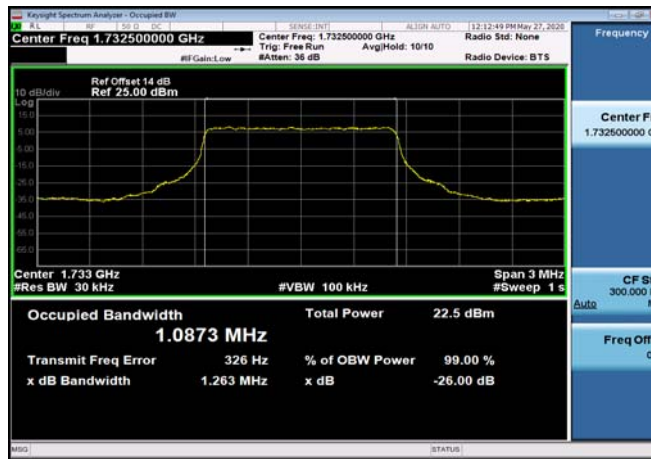


FDD04_MidRange_1.4MHz_1732.5MHz_Q16

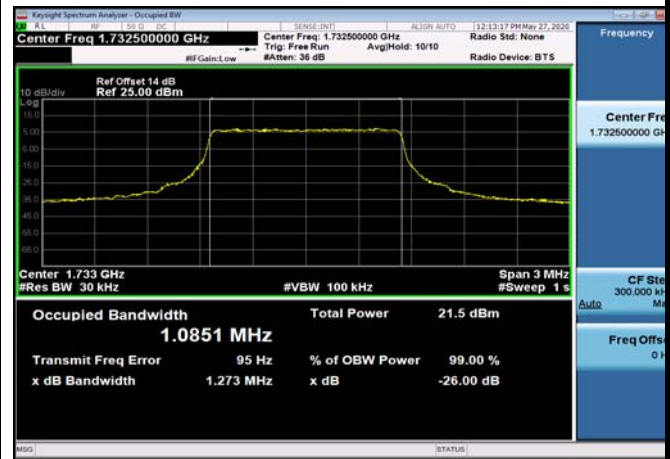


FDD04_MidRange_3MHz_1732.5MHz_QPSK

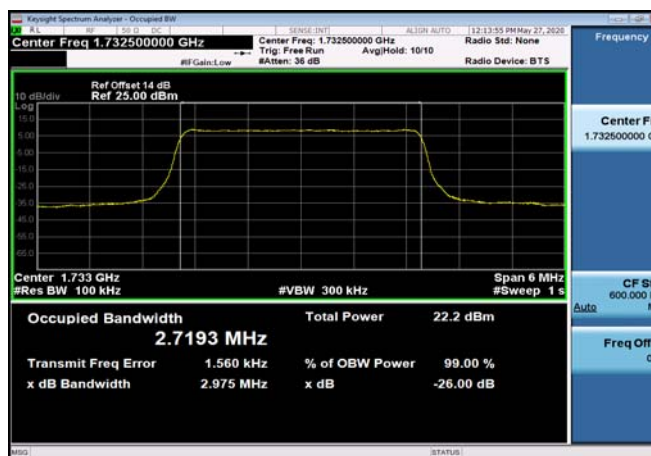


FDD04_MidRange_3MHz_1732.5MHz_Q16






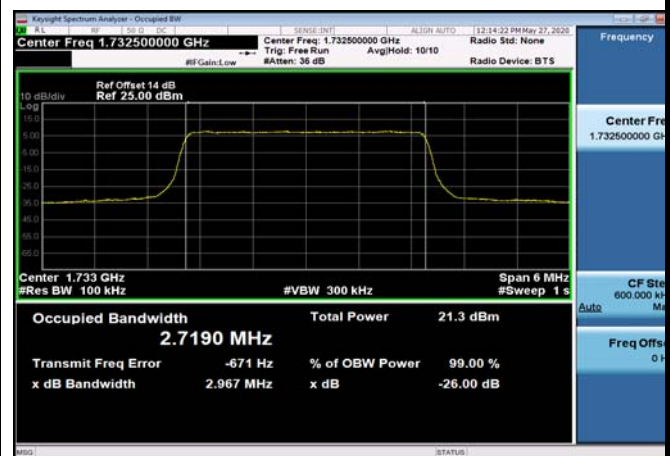




FDD04_MidRange_5MHz_1732.5MHz_QPSK

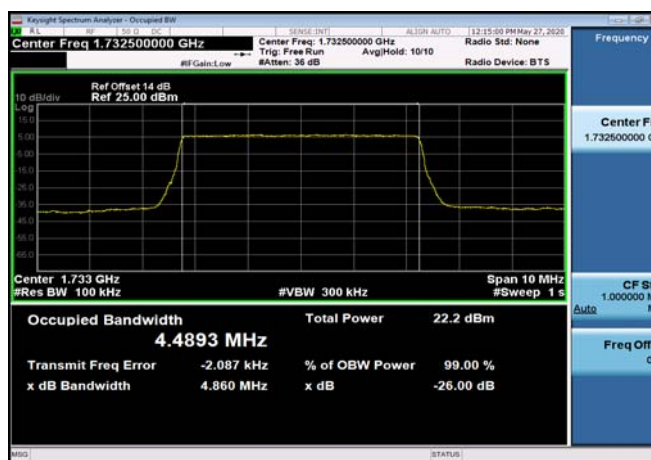


FDD04_MidRange_5MHz_1732.5MHz_Q16

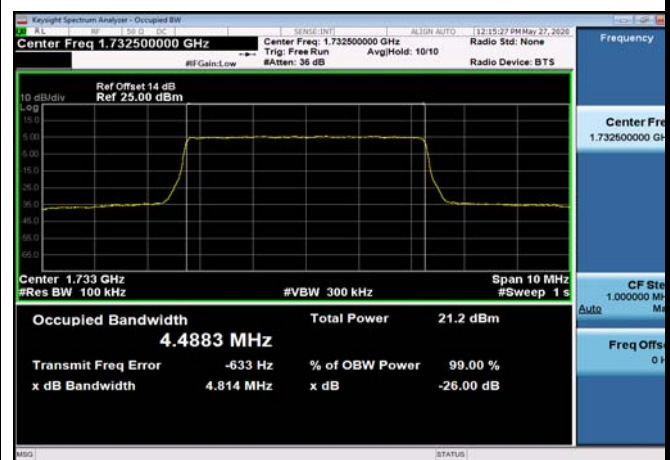

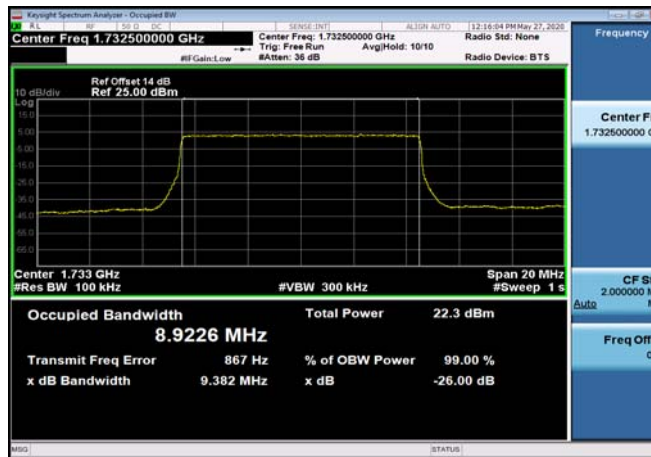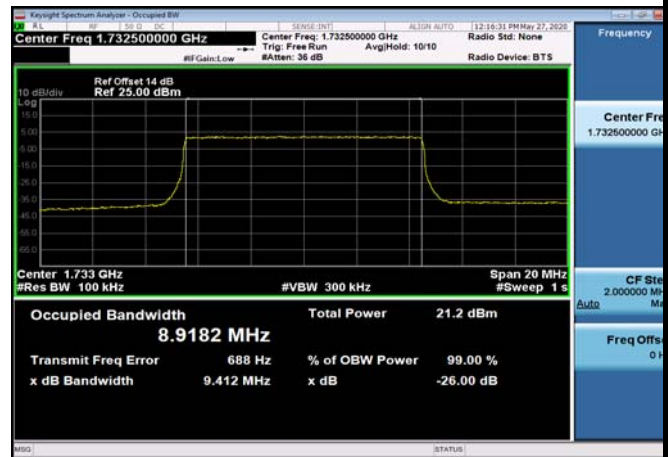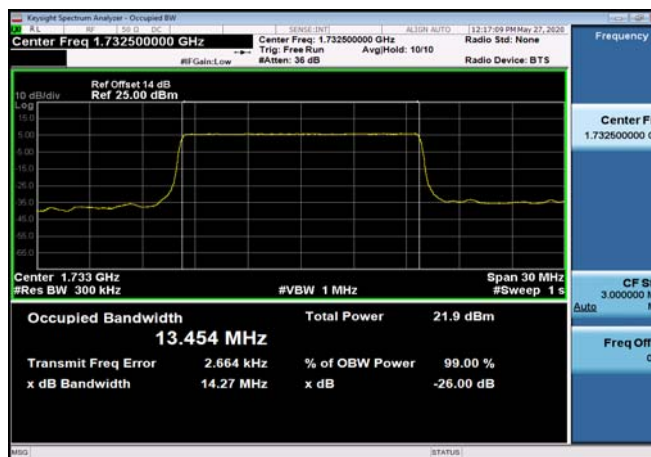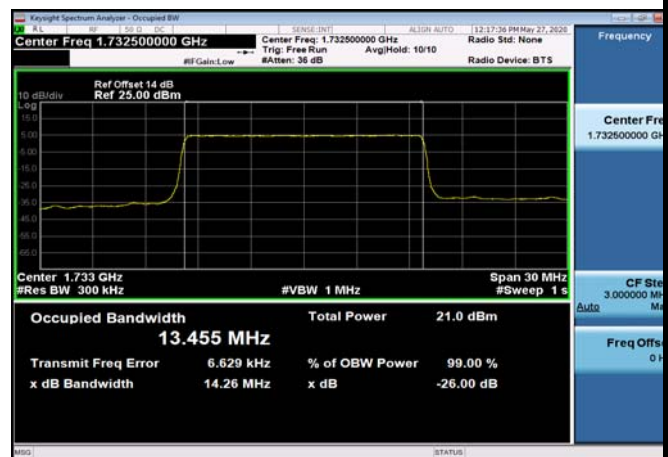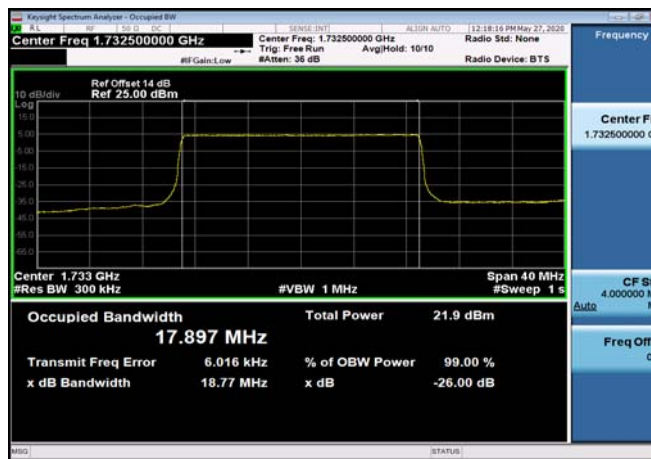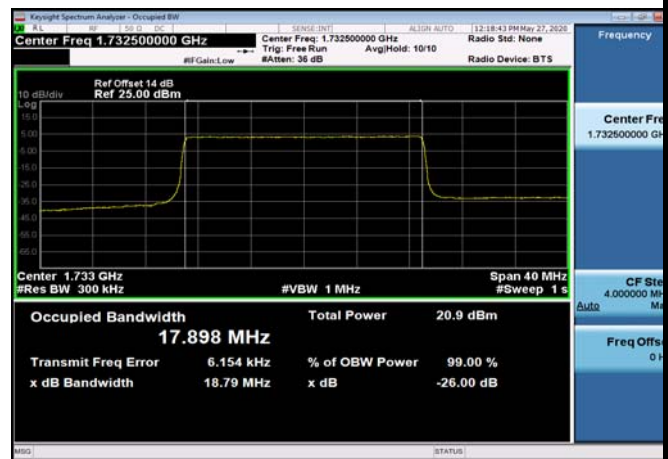
FDD04_MidRange_10MHz_1732.5MHz
_QPSKFDD04_MidRange_10MHz_1732.5MHz
_Q16FDD04_MidRange_15MHz_1732.5MHz
_QPSKFDD04_MidRange_15MHz_1732.5MHz
_Q16FDD04_MidRange_20MHz_1732.5MHz
_QPSKFDD04_MidRange_20MHz_1732.5MHz
_Q16

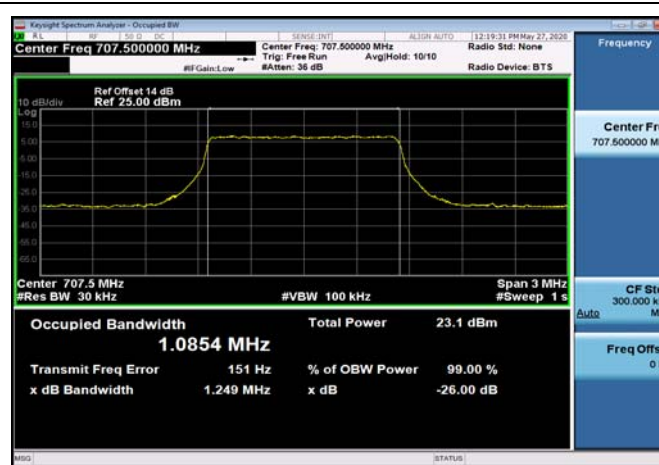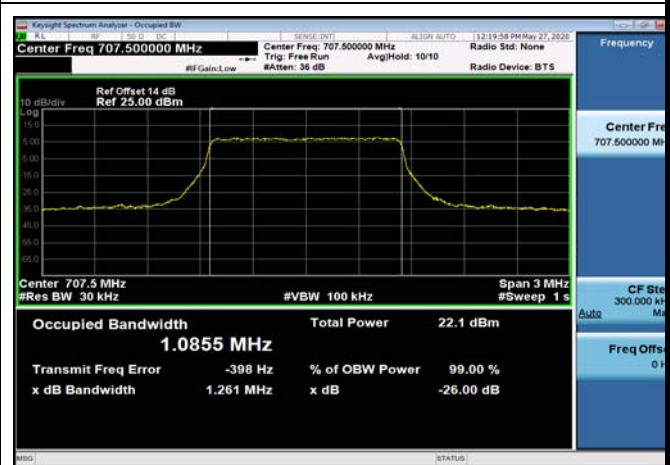FDD12_MidRange_1.4MHz_707.5MHz
_QPSKFDD12_MidRange_1.4MHz_707.5MHz
_Q16


FDD12_MidRange_3MHz_707.5MHz_QPSK

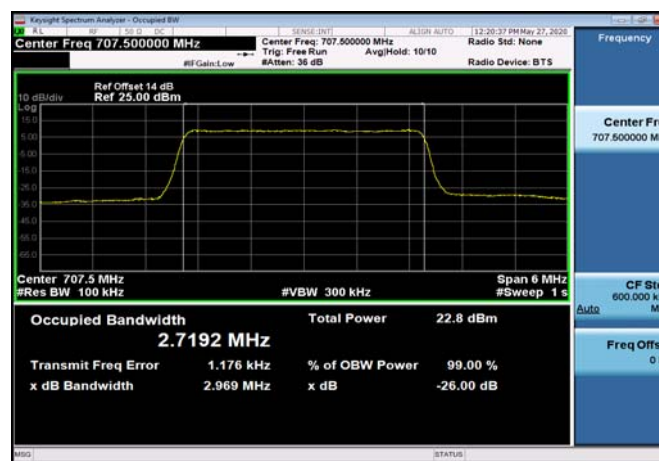


FDD12_MidRange_3MHz_707.5MHz_Q16

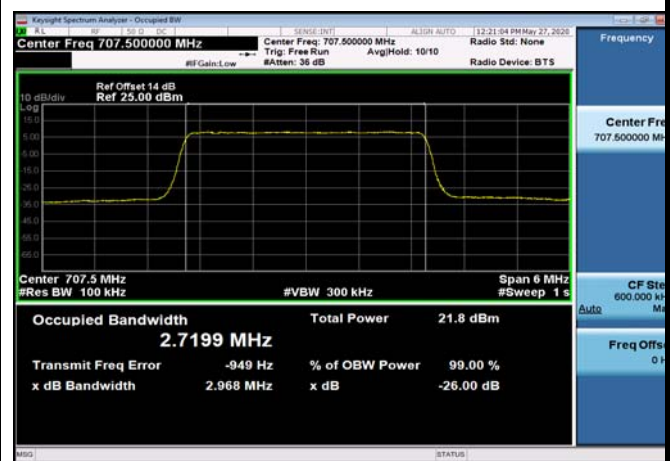

FDD12_MidRange_5MHz_707.5MHz_QPSK

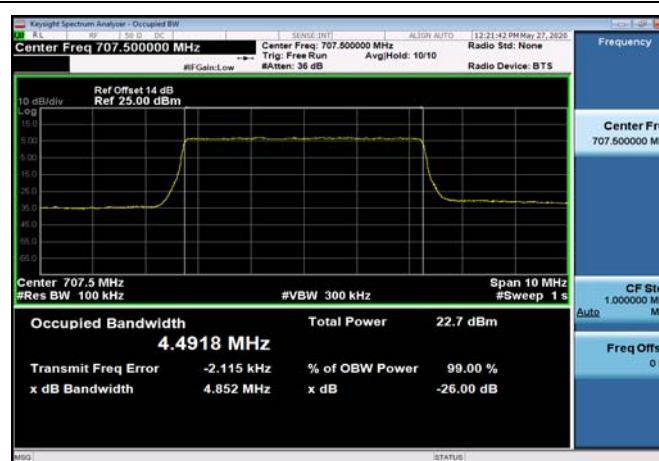

FDD12_MidRange_5MHz_707.5MHz_Q16

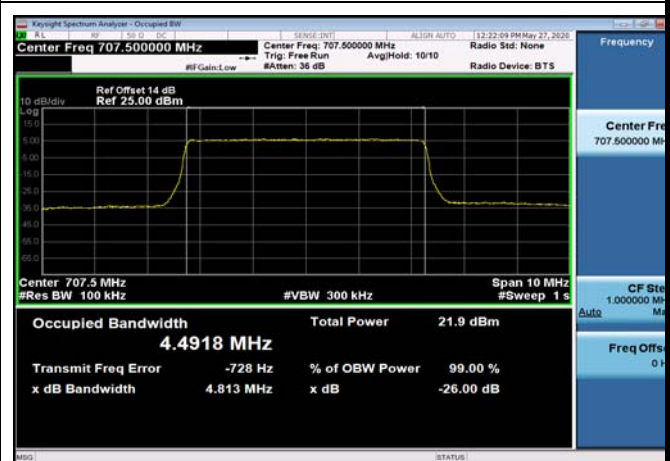




FDD12_MidRange_10MHz_707.5MHz_QPSK



FDD12_MidRange_10MHz_707.5MHz_Q16




FDD17_MidRange_5MHz_710MHz_QPSK

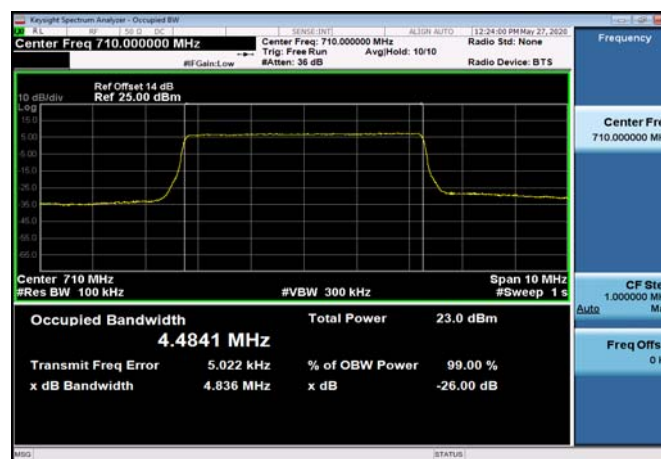


FDD17_MidRange_5MHz_710MHz_Q16



FDD17_MidRange_10MHz_710MHz_QPSK

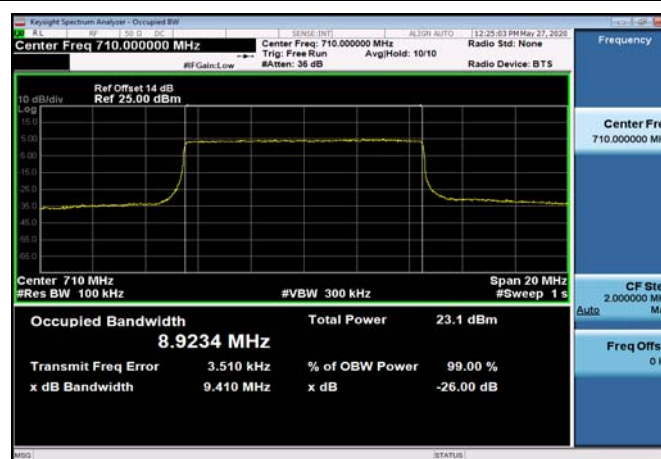


FDD17_MidRange_10MHz_710MHz_Q16

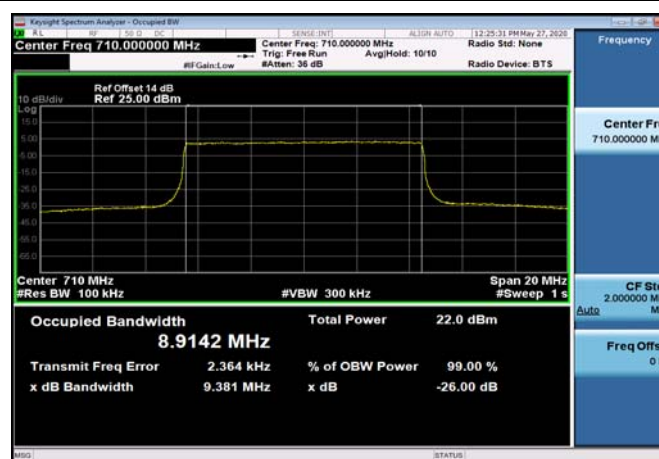





TDD41_MidRange_5MHz_2593MHz_QPSK

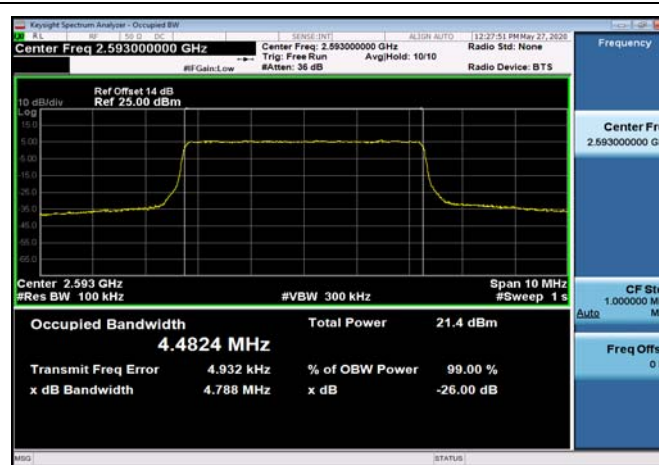


TDD41_MidRange_5MHz_2593MHz_Q16

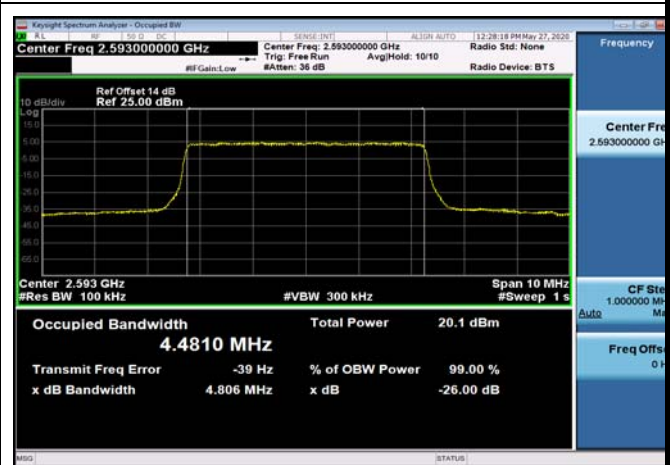


TDD41_MidRange_10MHz_2593MHz_QPSK

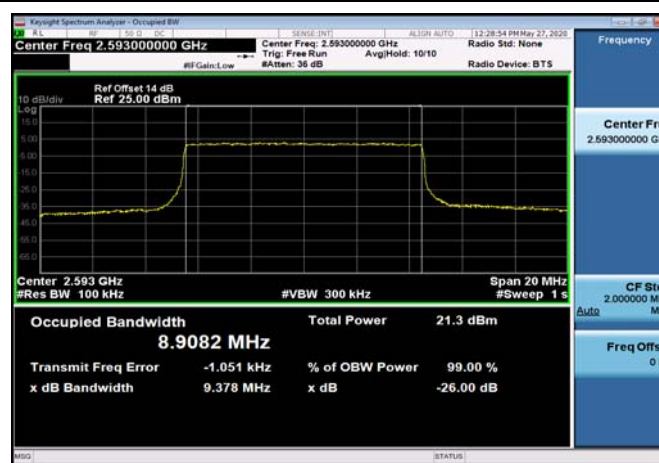


TDD41_MidRange_10MHz_2593MHz_Q16

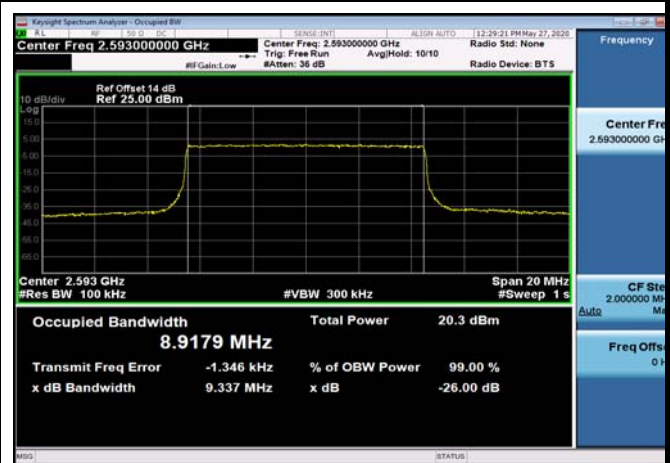

TDD41_MidRange_15MHz_2593MHz_QPSK

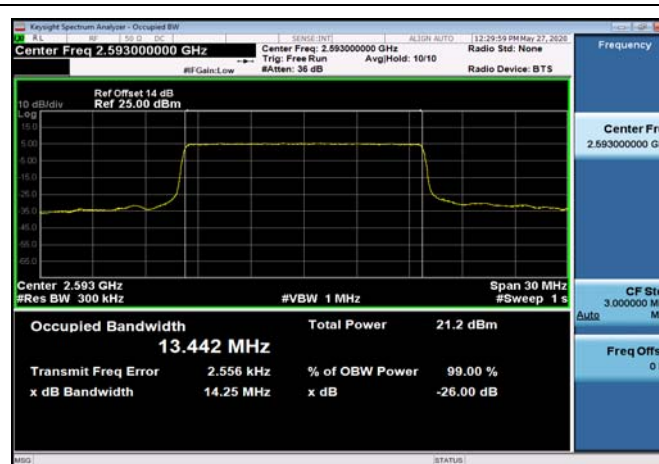


TDD41_MidRange_15MHz_2593MHz_Q16

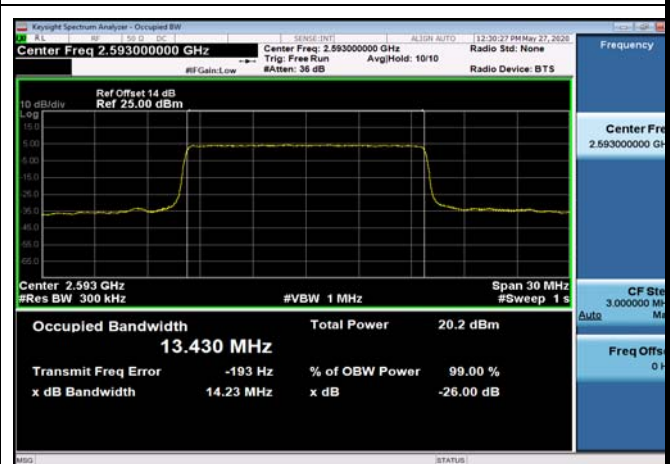




TDD41_MidRange_20MHz_2593MHz_QPSK

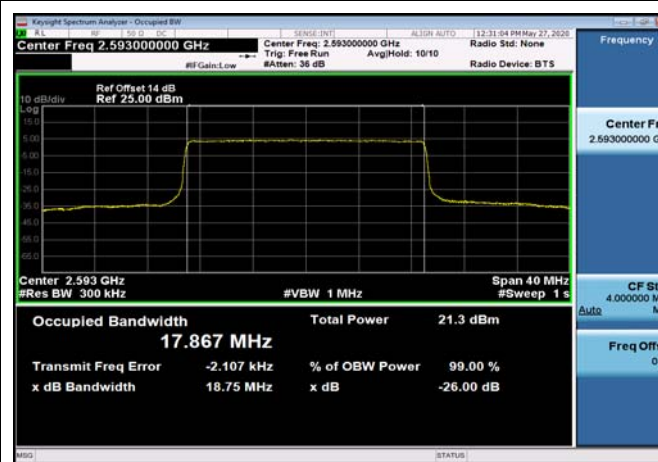

TDD41_MidRange_20MHz_2593MHz_Q16

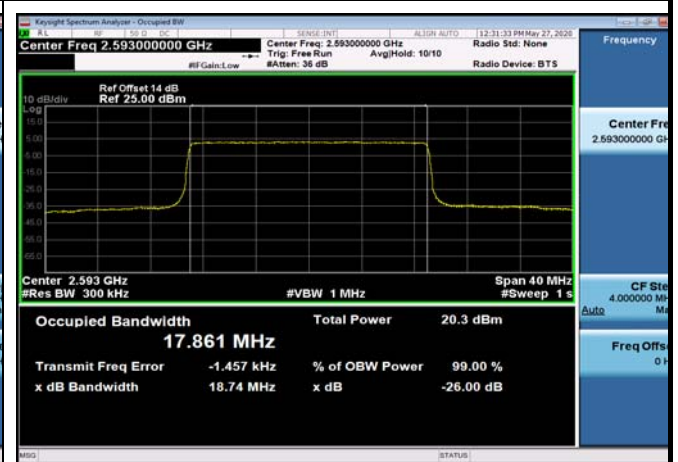

**Frequency Stability**

Test Result and Data

Frequency Stability NormalTC_NormalVol									
Temperature	Voltage	Band	BandWidth (MHz)	RbMode	Modulation	Frequency Error (Hz)	Frequency Stability (ppm)	Limit (ppm)	Result
Normal	Low	FDD02	10	fullRB	QPSK	-4.277	-0.002	2.5	Pass
Normal	Normal	FDD02	10	fullRB	QPSK	3.633	0.002	2.5	Pass
Normal	High	FDD02	10	fullRB	QPSK	-4.764	-0.003	2.5	Pass
50	Normal	FDD02	10	fullRB	QPSK	3.762	0.002	2.5	Pass
40	Normal	FDD02	10	fullRB	QPSK	5.236	0.003	2.5	Pass
30	Normal	FDD02	10	fullRB	QPSK	-19.083	-0.010	2.5	Pass
20	Normal	FDD02	10	fullRB	QPSK	3.376	0.002	2.5	Pass
10	Normal	FDD02	10	fullRB	QPSK	2.933	0.002	2.5	Pass
0	Normal	FDD02	10	fullRB	QPSK	-3.519	-0.002	2.5	Pass
-10	Normal	FDD02	10	fullRB	QPSK	6.094	0.003	2.5	Pass
-20	Normal	FDD02	10	fullRB	QPSK	3.905	0.002	2.5	Pass
-30	Normal	FDD02	10	fullRB	QPSK	4.206	0.002	2.5	Pass
Normal	Low	FDD04	10	fullRB	QPSK	-2.904	-0.002	2.5	Pass
Normal	Normal	FDD04	10	fullRB	QPSK	4.678	0.003	2.5	Pass
Normal	High	FDD04	10	fullRB	QPSK	4.106	0.002	2.5	Pass
50	Normal	FDD04	10	fullRB	QPSK	3.204	0.002	2.5	Pass
40	Normal	FDD04	10	fullRB	QPSK	-3.004	-0.002	2.5	Pass
30	Normal	FDD04	10	fullRB	QPSK	3.591	0.002	2.5	Pass
20	Normal	FDD04	10	fullRB	QPSK	-3.433	-0.002	2.5	Pass
10	Normal	FDD04	10	fullRB	QPSK	4.206	0.002	2.5	Pass
0	Normal	FDD04	10	fullRB	QPSK	5.250	0.003	2.5	Pass
-10	Normal	FDD04	10	fullRB	QPSK	3.991	0.002	2.5	Pass
-20	Normal	FDD04	10	fullRB	QPSK	-3.018	-0.002	2.5	Pass
-30	Normal	FDD04	10	fullRB	QPSK	2.990	0.002	2.5	Pass
Normal	Low	FDD12	10	fullRB	QPSK	-4.749	-0.007	2.5	Pass
Normal	Normal	FDD12	10	fullRB	QPSK	1.903	0.003	2.5	Pass
Normal	High	FDD12	10	fullRB	QPSK	-4.005	-0.006	2.5	Pass



50	Normal	FDD12	10	fullRB	QPSK	-3.734	-0.005	2.5	Pass
40	Normal	FDD12	10	fullRB	QPSK	-3.691	-0.005	2.5	Pass
30	Normal	FDD12	10	fullRB	QPSK	-4.992	-0.007	2.5	Pass
20	Normal	FDD12	10	fullRB	QPSK	-3.676	-0.005	2.5	Pass
10	Normal	FDD12	10	fullRB	QPSK	-2.875	-0.004	2.5	Pass
0	Normal	FDD12	10	fullRB	QPSK	-2.518	-0.004	2.5	Pass
-10	Normal	FDD12	10	fullRB	QPSK	-4.621	-0.007	2.5	Pass
-20	Normal	FDD12	10	fullRB	QPSK	2.446	0.003	2.5	Pass
-30	Normal	FDD12	10	fullRB	QPSK	-2.375	-0.003	2.5	Pass
Normal	Low	FDD17	10	fullRB	QPSK	-3.605	-0.005	2.5	Pass
Normal	Normal	FDD17	10	fullRB	QPSK	-1.788	-0.003	2.5	Pass
Normal	High	FDD17	10	fullRB	QPSK	-3.605	-0.005	2.5	Pass
50	Normal	FDD17	10	fullRB	QPSK	-2.117	-0.003	2.5	Pass
40	Normal	FDD17	10	fullRB	QPSK	-2.890	-0.004	2.5	Pass
30	Normal	FDD17	10	fullRB	QPSK	2.074	0.003	2.5	Pass
20	Normal	FDD17	10	fullRB	QPSK	2.632	0.004	2.5	Pass
10	Normal	FDD17	10	fullRB	QPSK	-2.661	-0.004	2.5	Pass
0	Normal	FDD17	10	fullRB	QPSK	-2.260	-0.003	2.5	Pass
-10	Normal	FDD17	10	fullRB	QPSK	1.774	0.002	2.5	Pass
-20	Normal	FDD17	10	fullRB	QPSK	-3.791	-0.005	2.5	Pass
-30	Normal	FDD17	10	fullRB	QPSK	-3.862	-0.005	2.5	Pass
Normal	Low	TDD41	10	fullRB	QPSK	29.883	0.012	2.5	Pass
Normal	Normal	TDD41	10	fullRB	QPSK	23.561	0.009	2.5	Pass
Normal	High	TDD41	10	fullRB	QPSK	26.965	0.010	2.5	Pass
50	Normal	TDD41	10	fullRB	QPSK	31.557	0.012	2.5	Pass
40	Normal	TDD41	10	fullRB	QPSK	27.280	0.011	2.5	Pass
30	Normal	TDD41	10	fullRB	QPSK	29.583	0.011	2.5	Pass
20	Normal	TDD41	10	fullRB	QPSK	23.274	0.009	2.5	Pass
10	Normal	TDD41	10	fullRB	QPSK	26.994	0.010	2.5	Pass
0	Normal	TDD41	10	fullRB	QPSK	24.061	0.009	2.5	Pass
-10	Normal	TDD41	10	fullRB	QPSK	28.110	0.011	2.5	Pass
-20	Normal	TDD41	10	fullRB	QPSK	29.426	0.011	2.5	Pass



-30	Normal	TDD41	10	fullRB	QPSK	22.101	0.009	2.5	Pass
-----	--------	-------	----	--------	------	--------	-------	-----	------


Note: Normal=5.0V, Low=4.5V, High=5.5V




Conducted Out of Band Emissions

Test Result and Data


FDD02_HighRange_1.4MHz_30MHz~26GHz

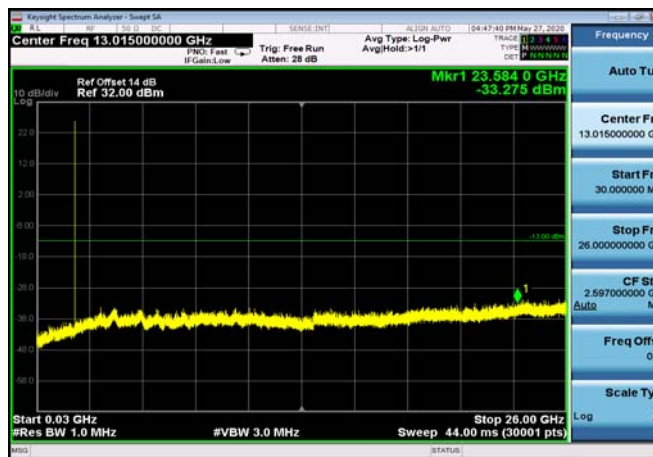


FDD02_HighRange_10MHz_30MHz~26GHz

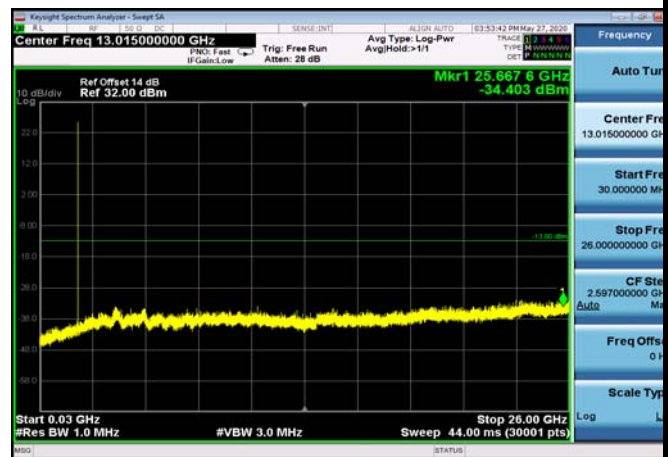


FDD02_HighRange_15MHz_30MHz~26GHz

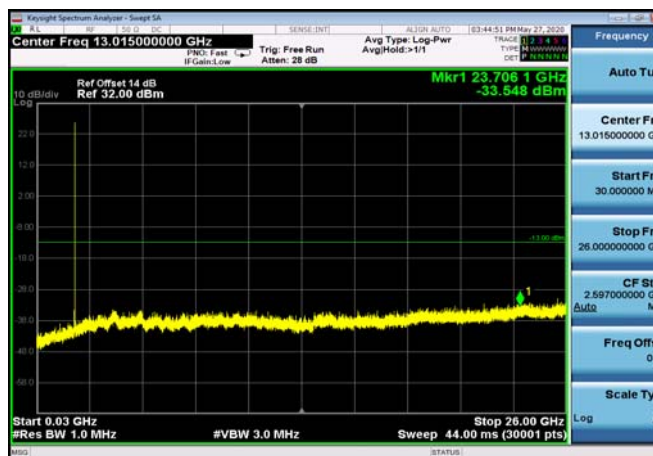


FDD02_HighRange_20MHz_30MHz~26GHz

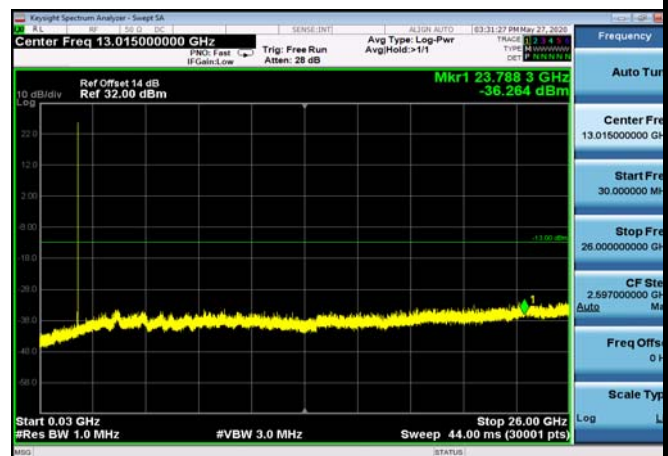

FDD02_HighRange_3MHz_30MHz~26GHz

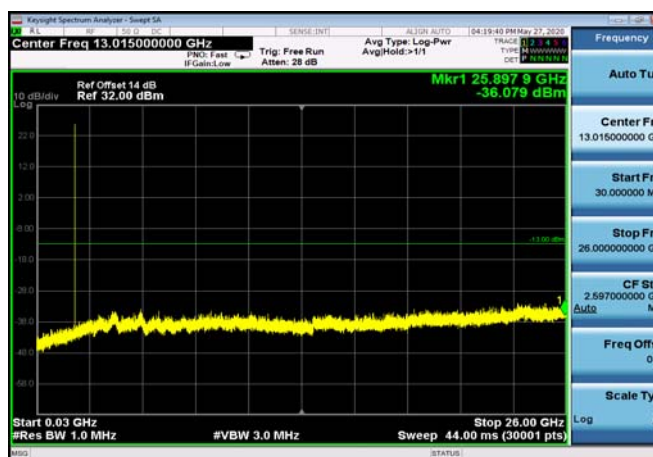


FDD02_HighRange_5MHz_30MHz~26GHz

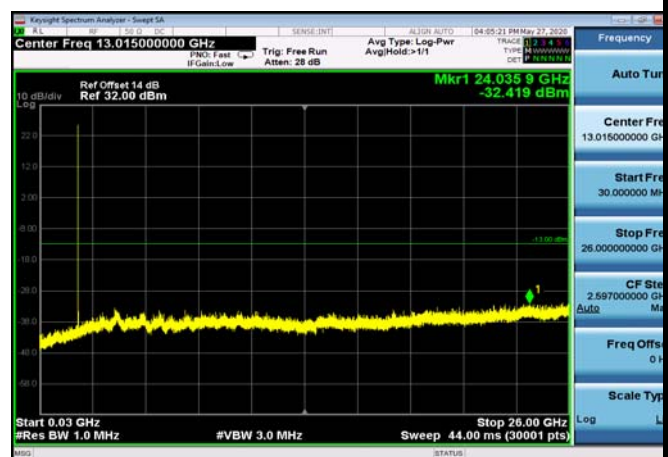





FDD02_LowRange_1.4MHz_30MHz~26GHz

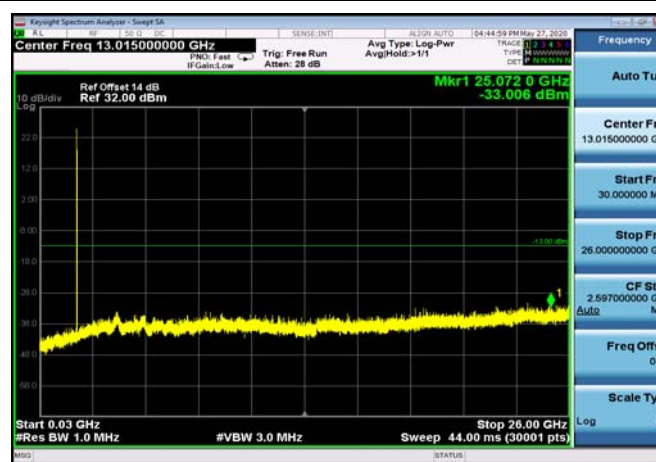


FDD02_LowRange_10MHz_30MHz~26GHz

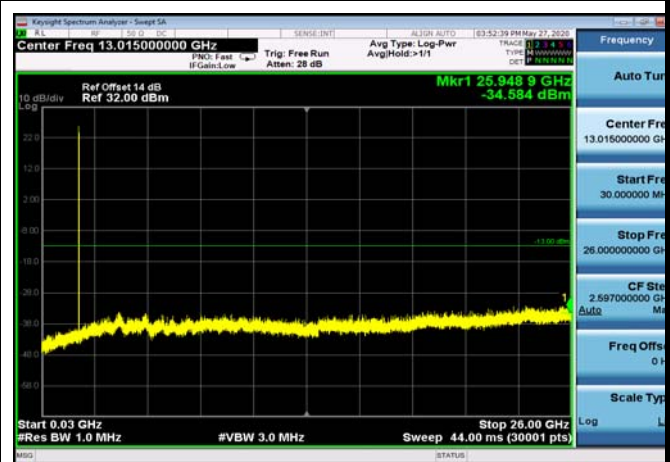


FDD02_LowRange_15MHz_30MHz~26GHz

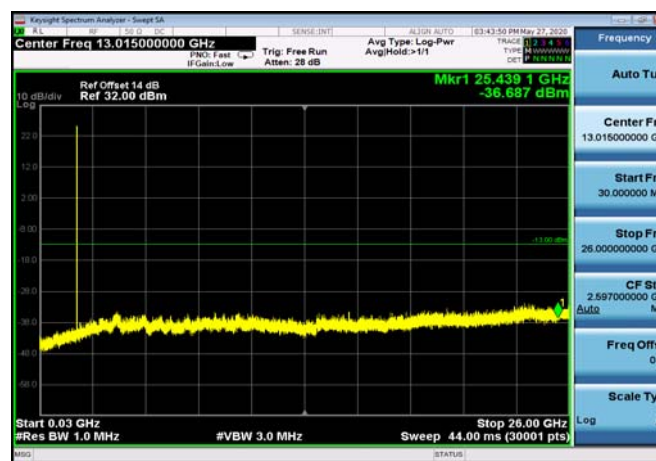


FDD02_LowRange_20MHz_30MHz~26GHz

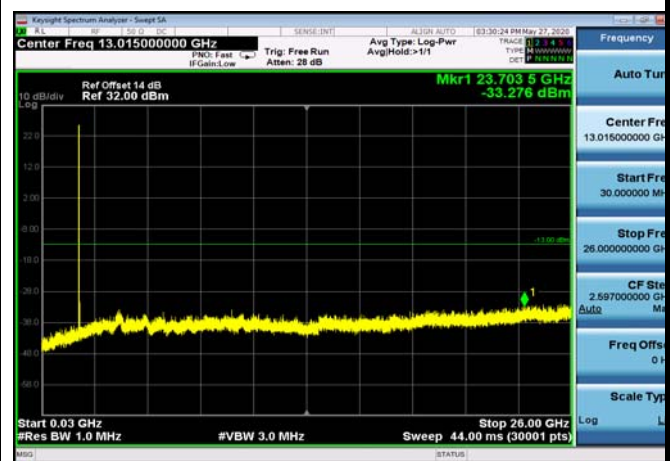

FDD02_LowRange_5MHz_30MHz~26GHz

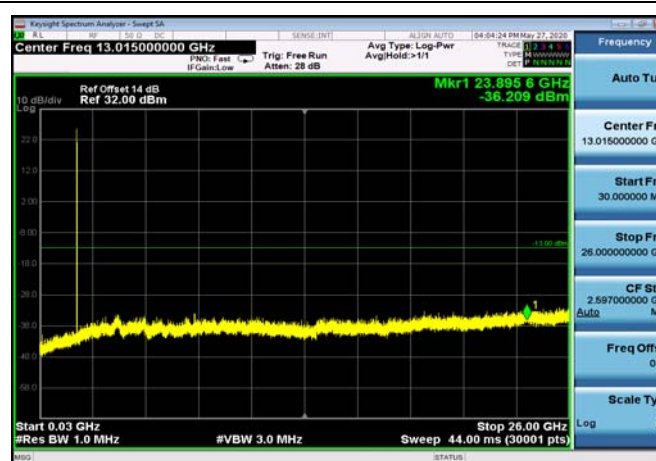


FDD02_MidRange_1.4MHz_30MHz~26GHz

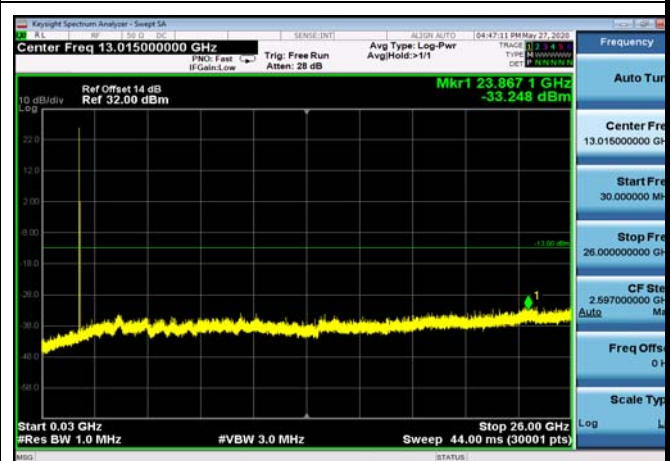





FDD02_MidRange_10MHz_30MHz~26GHz

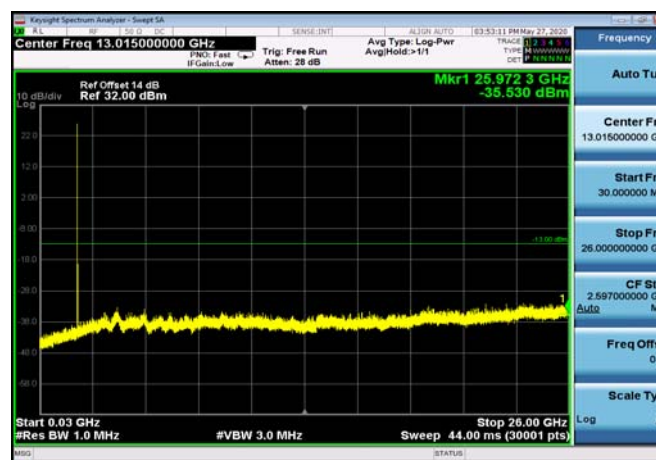


FDD02_MidRange_15MHz_30MHz~26GHz

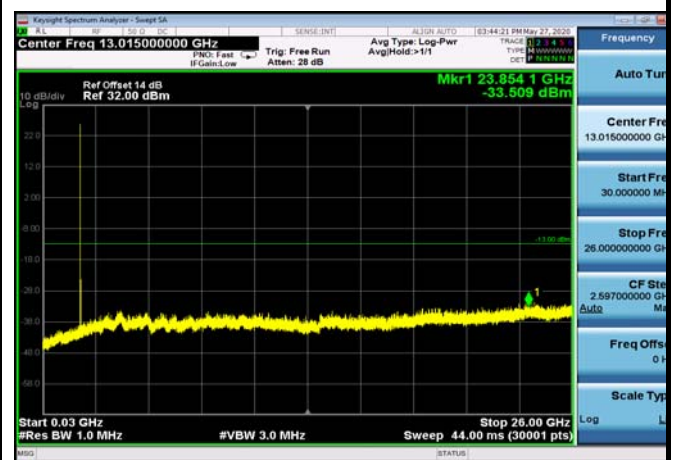


FDD02_MidRange_20MHz_30MHz~26GHz

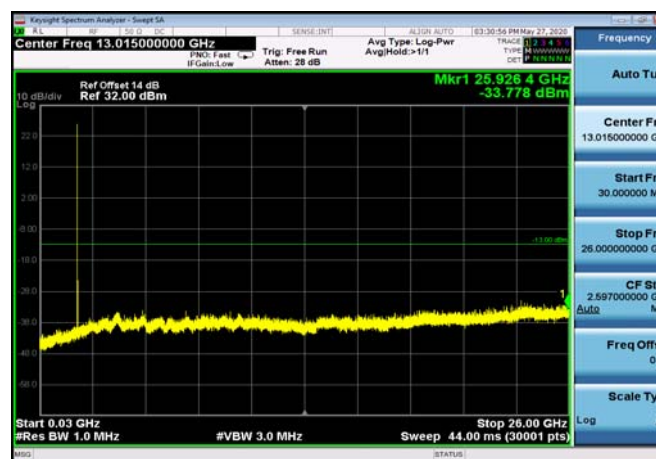


FDD02_MidRange_5MHz_30MHz~26GHz

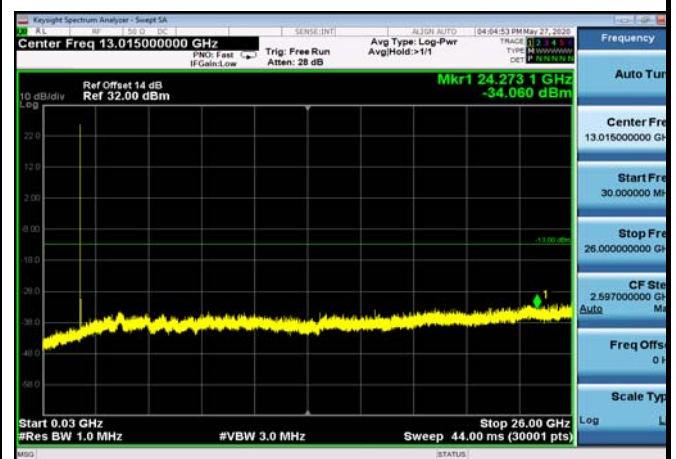

FDD04_HighRange_10MHz_30MHz~26GHz

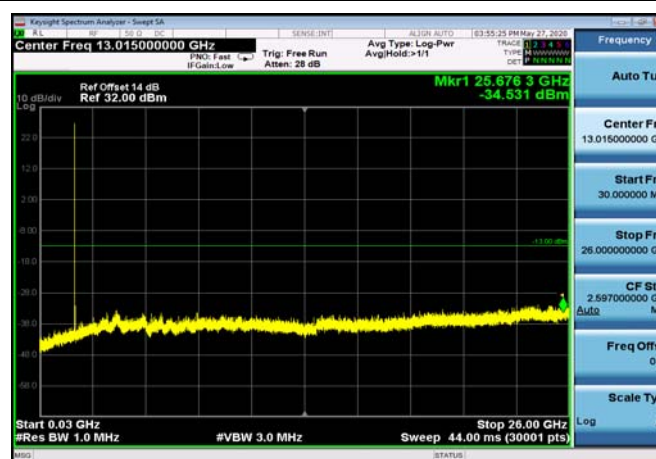


FDD04_HighRange_15MHz_30MHz~26GHz

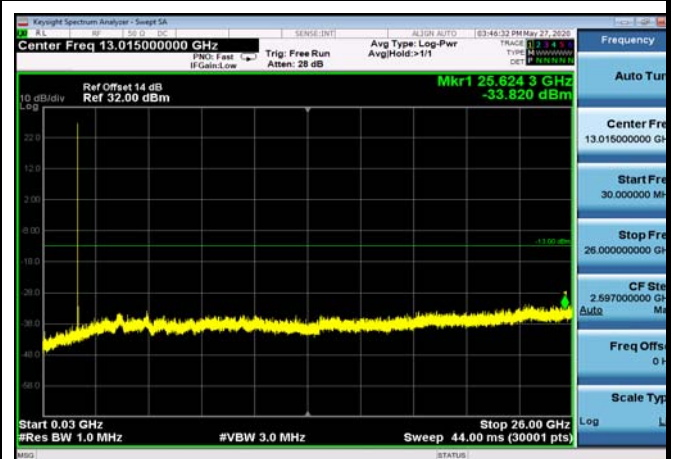





FDD04_HighRange_20MHz_30MHz~26GHz

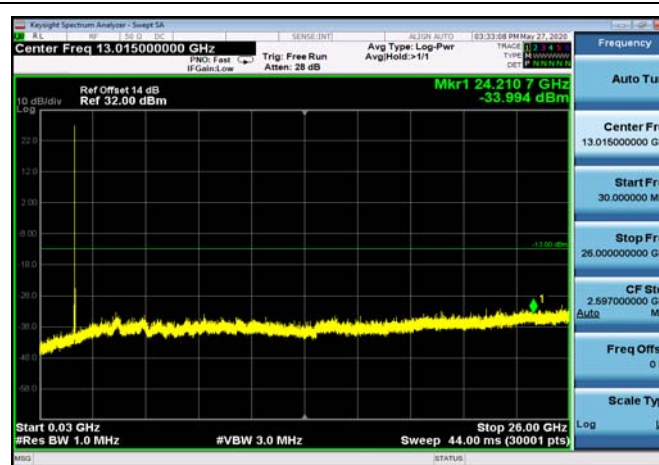


FDD04_HighRange_5MHz_30MHz~26GHz

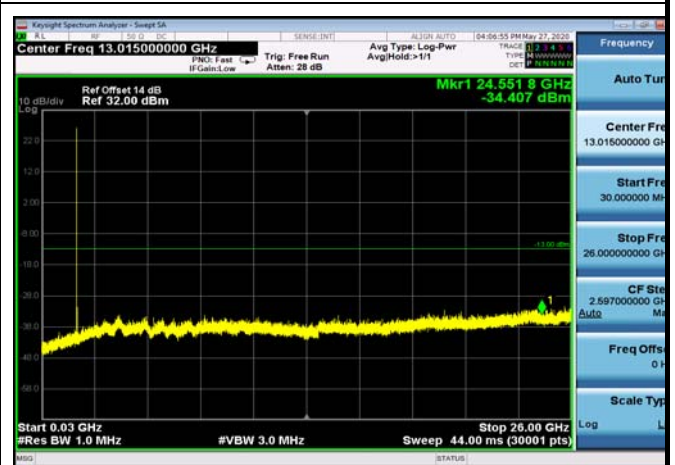


FDD04_LowRange_10MHz_30MHz~26GHz

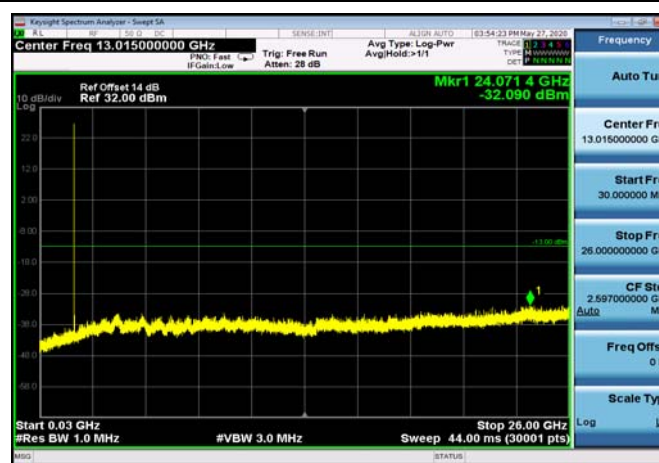


FDD04_LowRange_15MHz_30MHz~26GHz

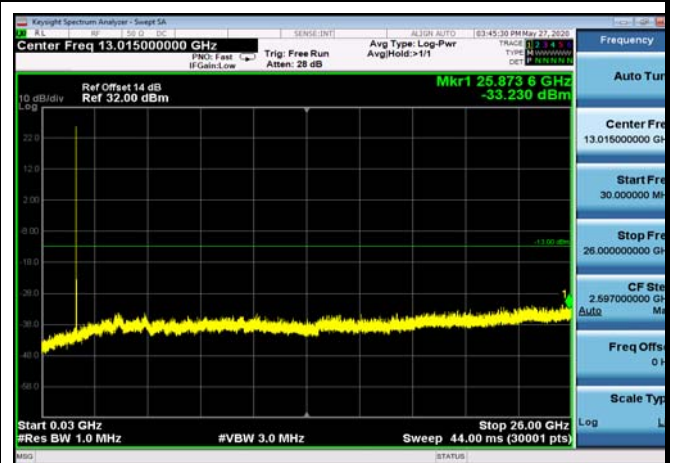

FDD04_LowRange_20MHz_30MHz~26GHz

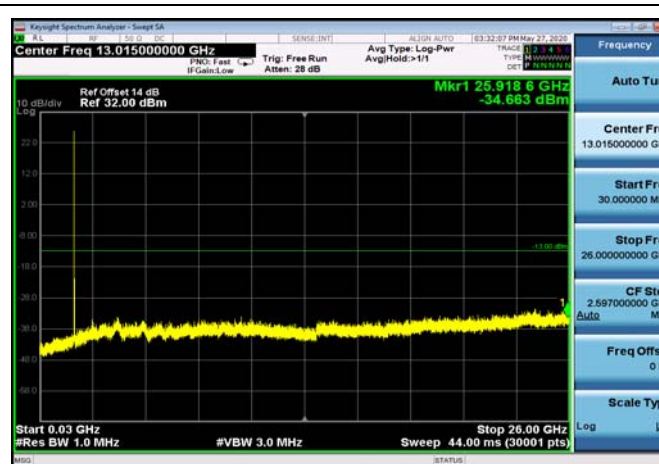


FDD04_LowRange_5MHz_30MHz~26GHz

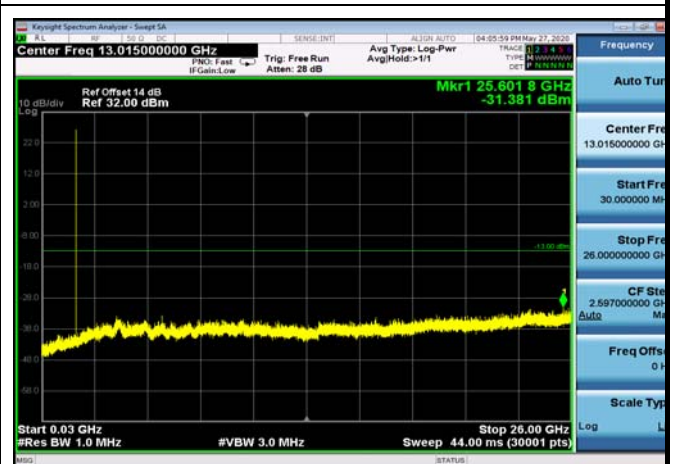





FDD04_MidRange_10MHz_30MHz~26GHz

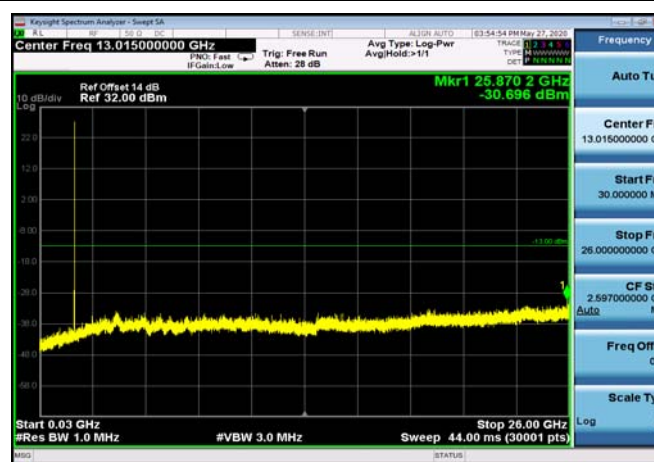


FDD04_MidRange_15MHz_30MHz~26GHz

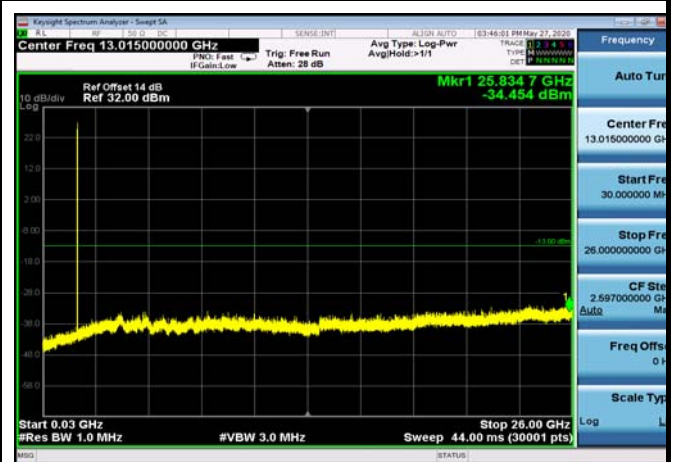


FDD04_MidRange_20MHz_30MHz~26GHz

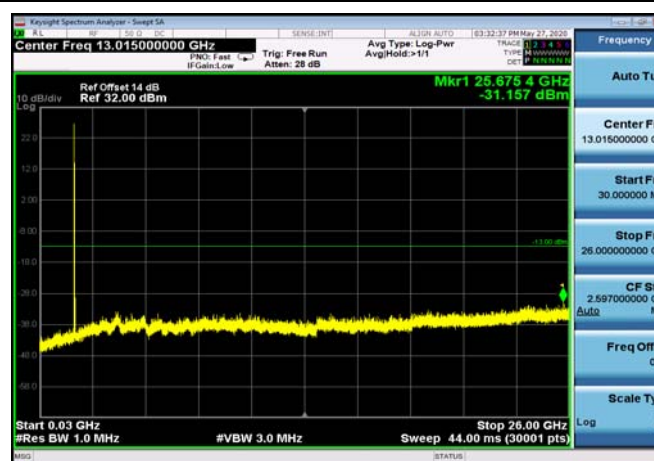

FDD04_MidRange_5MHz_30MHz~26GHz

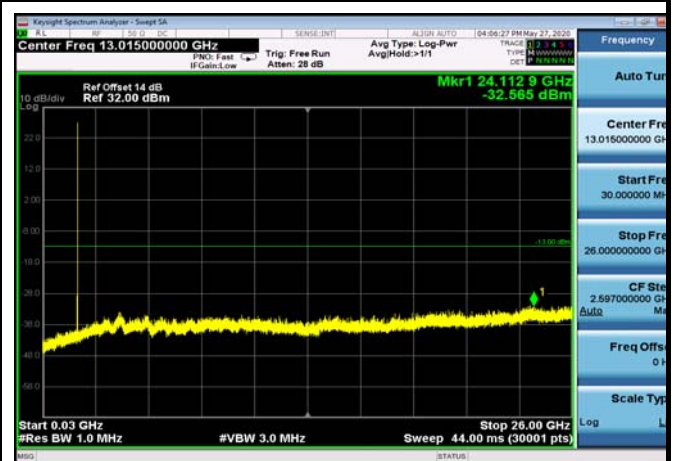

FDD12_HighRange_1.4MHz_30MHz~26GHz

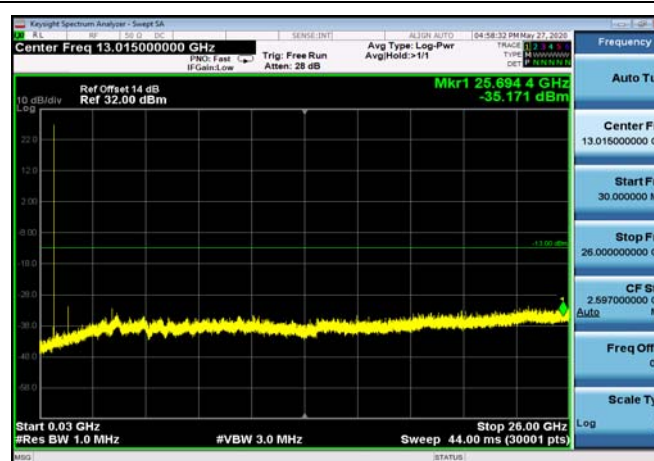

FDD12_HighRange_10MHz_30MHz~26GHz

