

ANNEX I – MANUFACTURER-PROVIDED INFORMATION

Note: The accuracy and precision of the following information provided by the manufacturer of the equipment under test has not been verified using test methods, cannot be verified, or is not necessary to verify.

Power at Final Amplifier:

120 V * 0.8 A = 100 W

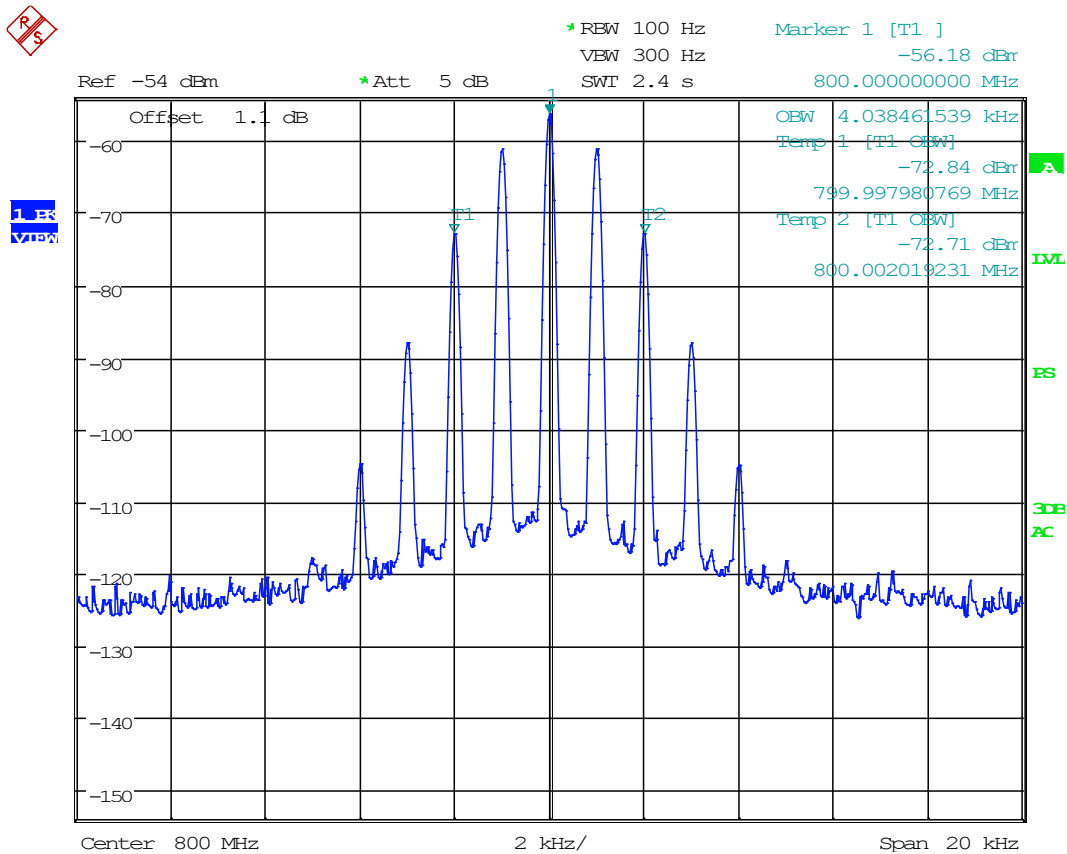
ANNEX II – MEASUREMENT DATA**KDB 935210 4.1 INPUT SIGNALS****4K00F3E (Narrowband Analog FM Voice)****Substituted for signals:**

4K00F1E (Narrow NXDN Voice)

4K00F1D (Narrow NXDN Data)

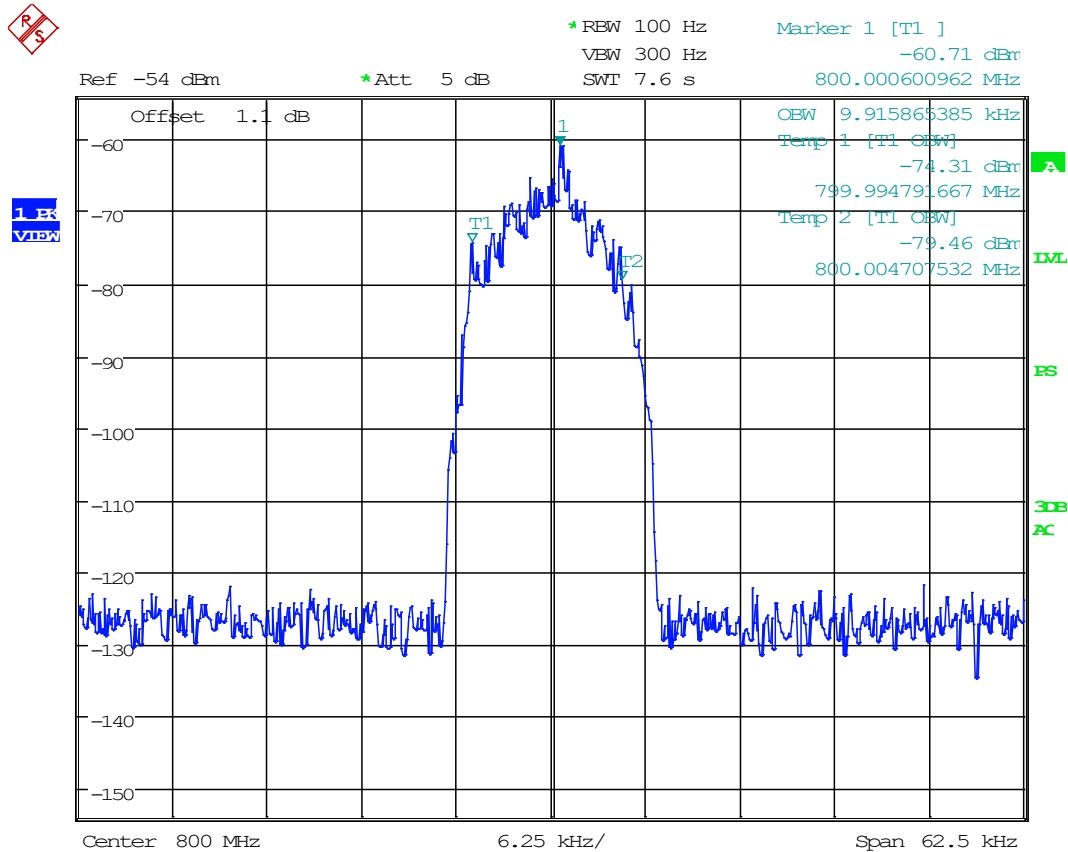
4K00F1W (Narrow NXDN Voice & Data)

4K00F2D (Narrow NXDN CW ID)



Date: 30.JAN.2019 13:10:11

Occupied Bandwidth: 4.04 kHz

KDB 935210 4.1 INPUT SIGNALS**9K80F1E/F1D (P25 Phase II H-DQPSK Voice, Data)**

Date: 30.JAN.2019 14:32:35

Occupied Bandwidth: 9.92 kHz

KDB 935210 4.1 INPUT SIGNALS**11K3F3E (Narrowband Analog FM Voice)****Substituted for signals:**

7K60FXE (2-Slot DMR TDMA Voice)

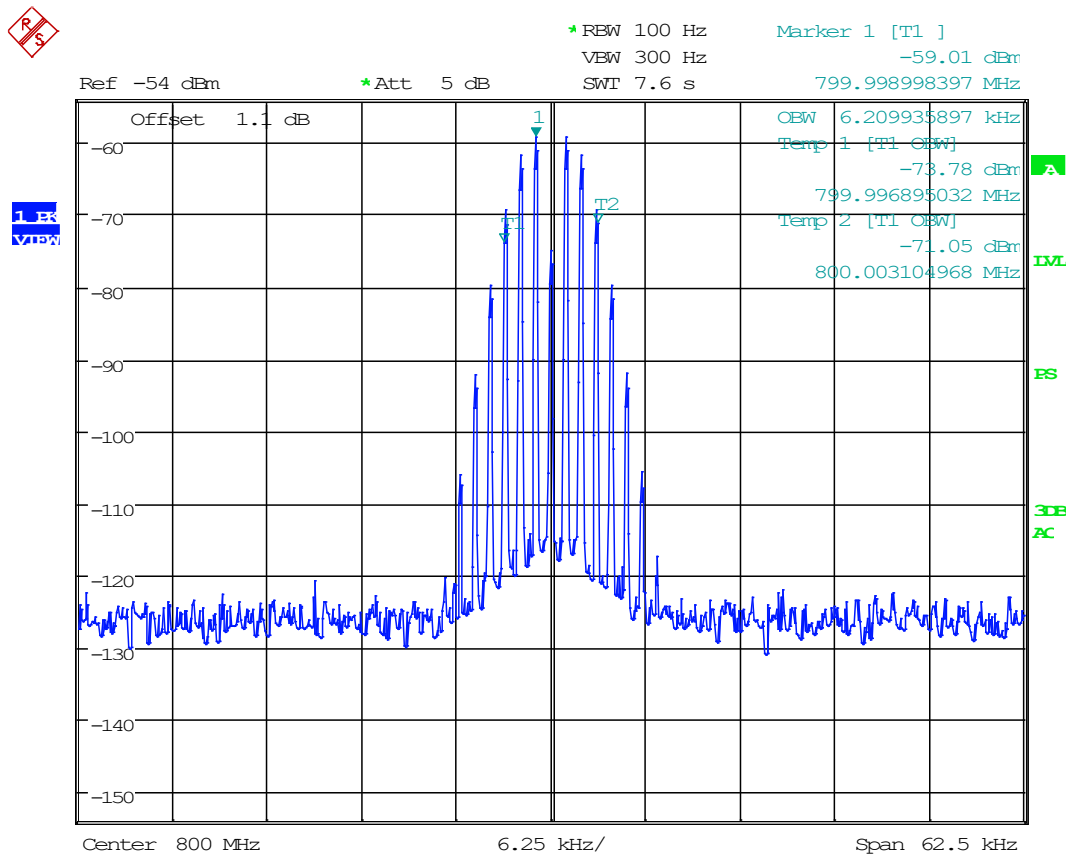
7K60FXD (2-Slot DMR TDMA Data)

8K30F1E (Wide NXDN Voice)

8K30F1D (Wide NXDN Data)

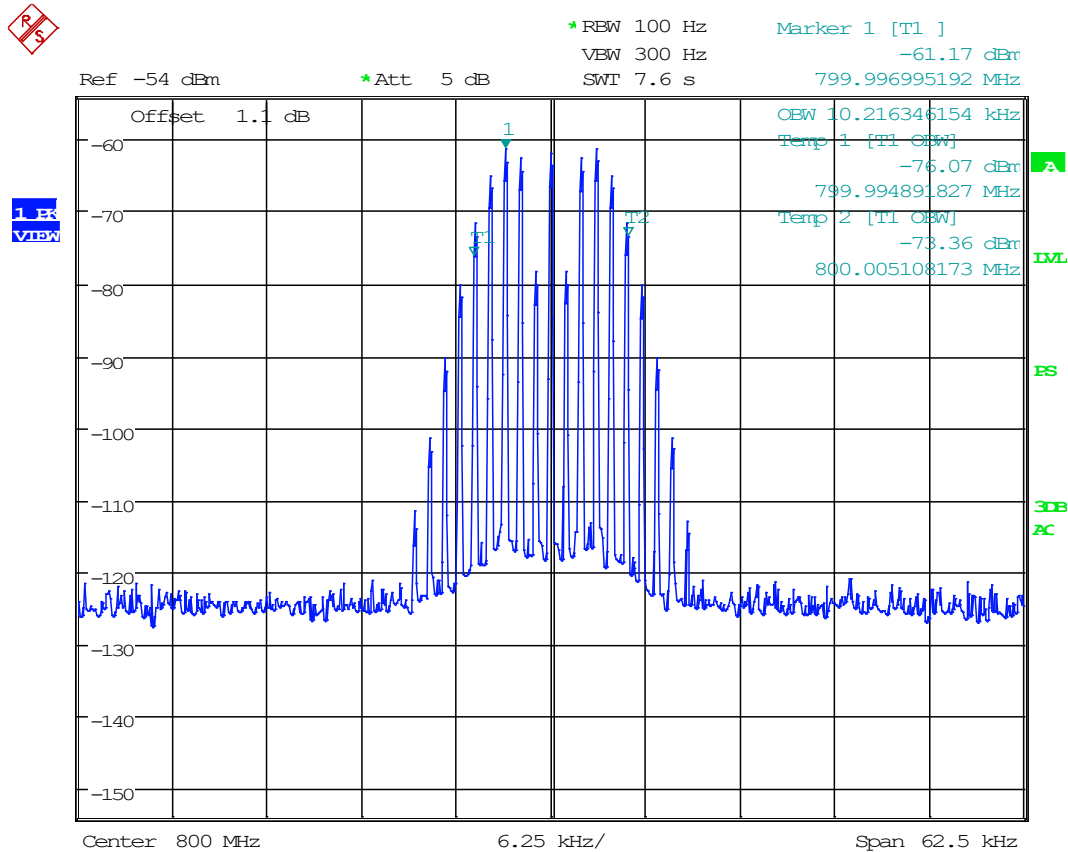
8K30F1W (Wide NXDN Voice & Data)

8K30F2D (Wide NXDN CW ID)



Date: 30.JAN.2019 14:19:45

Occupied Bandwidth: 6.21 kHz

KDB 935210 4.1 INPUT SIGNALS**16K0F3E (Wideband Analog FM Voice)**

Date: 30.JAN.2019 14:23:14

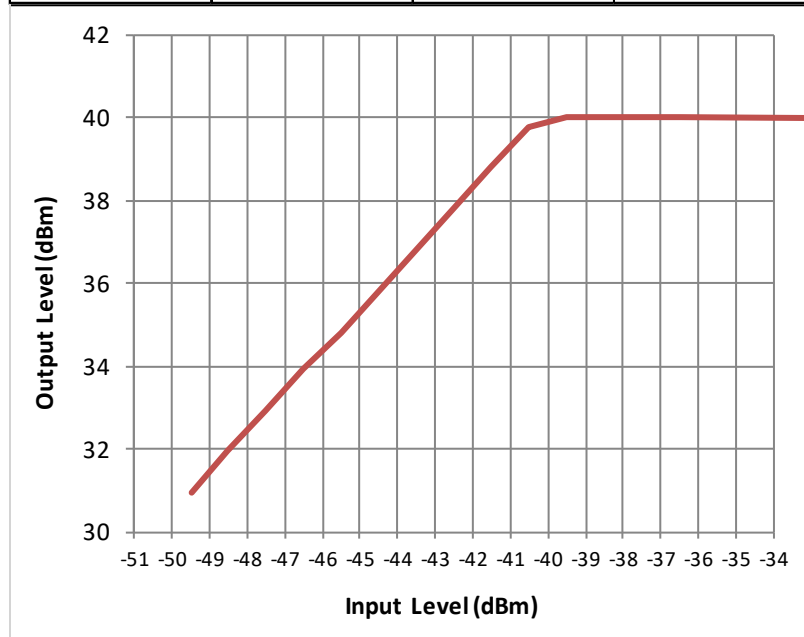
Occupied Bandwidth: 10.22 kHz

KDB 935210 4.2 AGC THRESHOLD

Test Engineer: FR
 Test Date: 4/22/2020

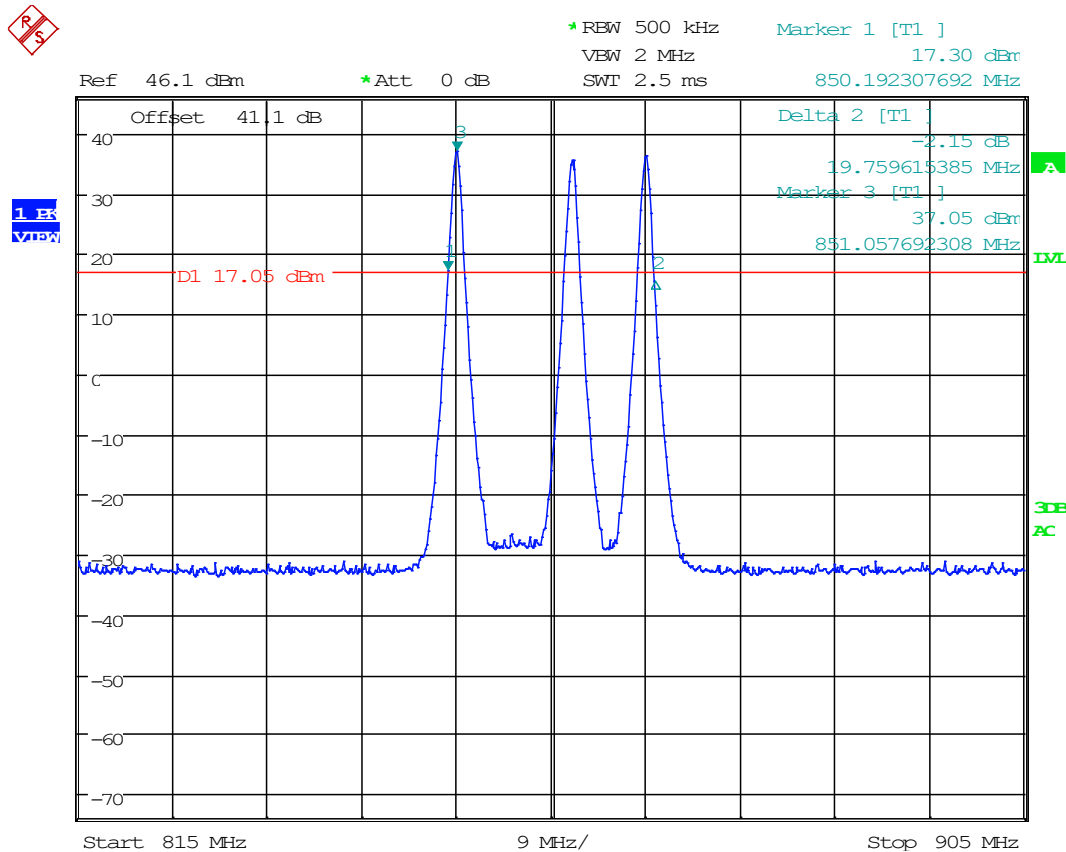
800 MHz Band, Downlink

INPUT (dBm)	CORRECTED INPUT (dBm)	CORRECTED OUTPUT (dBm)	GAIN (dB)
-49	-49.5	30.95	80.5
-48	-48.5	31.96	80.5
-47	-47.5	32.95	80.5
-46	-46.5	33.96	80.5
-45	-45.5	34.83	80.3
-44	-44.5	35.81	80.3
-43	-43.5	36.83	80.3
-42	-42.5	37.84	80.3
-41	-41.5	38.81	80.3
-40	-40.5	39.77	80.3
-39	-39.5	40.01	79.5
-38	-38.5	40.01	78.5
-37	-37.5	40	77.5
-36	-36.5	40.01	76.5
34.5	34	39.57	5.6

**AGC Input Level = -39.5 dBm**

KDB 935210 4.3 OUT OF BAND REJECTION

Test Engineer: FR
 Test Date: 4/2//2020

800 MHz Band, Downlink, Class A

Date: 22.APR.2020 13:23:56

2.1046 RF POWER OUTPUT**KDB 935210 4.5 RF POWER OUTPUT & GAIN**

Test Engineer: FR
 Test Date: 4/22/2020

800 Band, Downlink									
Frequency	AGC Level	Input (dBm)	Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Gain (dB)	Output ERP (W)	Limit ERP (W)	Margin (W)
851.0125	AGC	-39.5	40.01	0.00	3.02	79.5	5.00	5.00	0.00
851.0125	AGC +3	-36.5	40.00	0.00	3.02	76.5	4.99	5.00	0.01
851.0125	Saturation	-35.00	39.57	0.00	3.02	74.6	4.52	5.00	0.48
861.9875	AGC	-39.5	40.01	0.00	3.02	79.5	5.00	5.00	0.00
861.9875	AGC +3	-36.5	40.01	0.00	3.02	76.5	5.00	5.00	0.00
861.9875	Saturation	-35.00	39.55	0.00	3.02	74.6	4.50	5.00	0.50
868.9875	AGC	-39.5	40.01	0.00	3.02	79.5	5.00	5.00	0.00
868.9875	AGC +3	-36.5	40.00	0.00	3.02	76.5	4.99	5.00	0.01
868.9875	Saturation	-35.00	39.56	0.00	3.02	74.6	4.51	5.00	0.49

Max Power Output = 40.01 dBm (10.02 W)

Deployed Power Output = 36.98 dBm (5 W)

Max Gain < 80 dB

KDB 935210 4.6 NOISE FIGURE

Test Engineer: FR
 Test Date: 4/22/2020

800 MHz Band, Downlink

FCC KDB 935210 S. 4.6, ISSED RSS-131 S. 6.4 - NOISE FIGURE	
Measurement Freq. (MHz)	861.9875
Noise Source ENR (dB)	15.0569
Noise Source T_s^{OFF} , T_o (K)	290
Noise Source T_s^{ON} (K)	9581.4783
Noise Source Cal N_2^{off} (dB)	-115.04
Noise Source Cal N_2^{off} (pW)	0.00313
Noise Source Cal N_2^{on} (dB)	-109.7
Noise Source Cal N_2^{on} (pW)	0.01072
Calibration Ratio Y_2	3.4198
Calibration T_2	3549.7800
Noise + EUT N_{12}^{off} (dB)	-40.26
Noise + EUT N_{12}^{off} (pW)	94188.96
Noise + EUT N_{12}^{on} (dB)	-34.26
Noise + EUT N_{12}^{on} (pW)	374973.00
Noise + EUT Ratio Y_{12}	3.9811
Noise + EUT T_{12}	2826.8248
Gain (Ratio)	37033431.0938
Gain (dB)	75.6859
2nd Stage Correction T_1	2826.824733010540
Noise Factor F	10.74767
Noise Figure (dB)	10.31
Limit (dB)	9.00
Margin (dB)	-1.31

2.1047 AUDIO FREQUENCY RESPONSE

2.1047 LOW PASS FILTER RESPONSE

Test Engineer:_____

Test Date:_____

N/A. Device does not accept audio input.

2.1047 MODULATION LIMITING

Test Engineer: _____
Test Date: _____

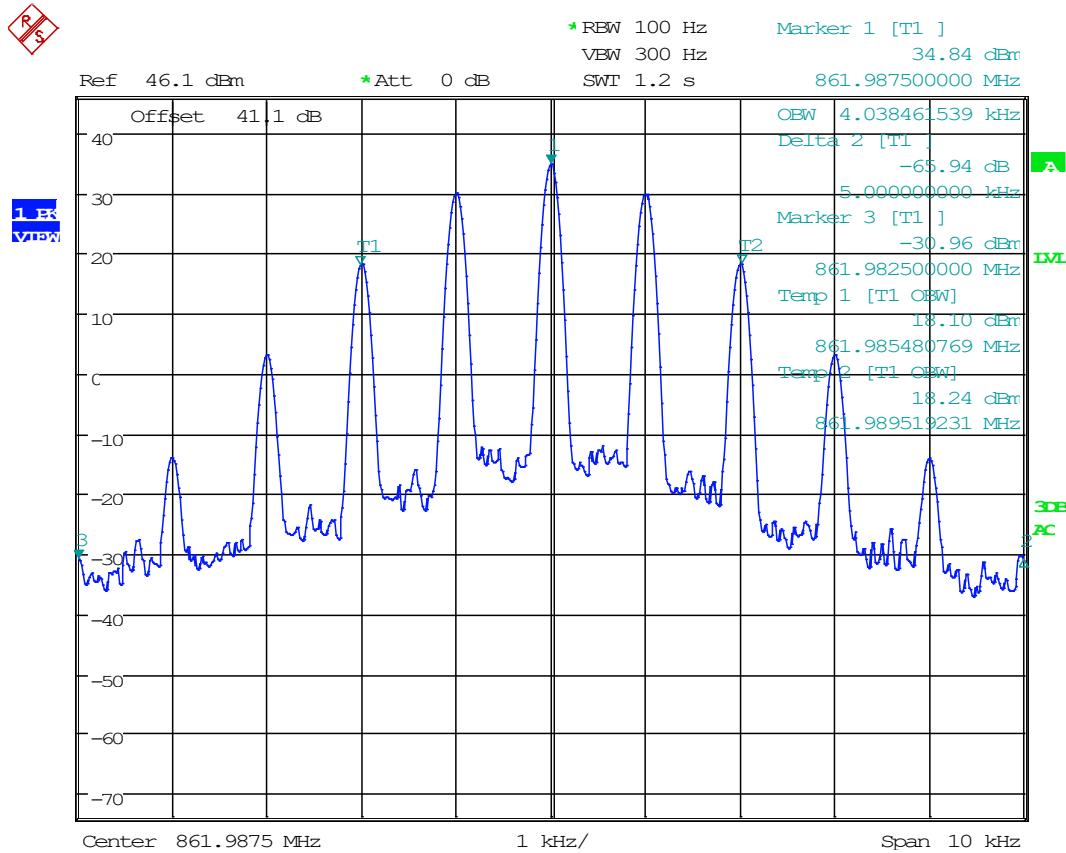
N/A. Device does not have means to limit modulation.

90.209 OCCUPIED BANDWIDTH

Test Engineer: FR
 Test Date: 4/22/2020

800 MHz Band, Downlink, 6.25k FM

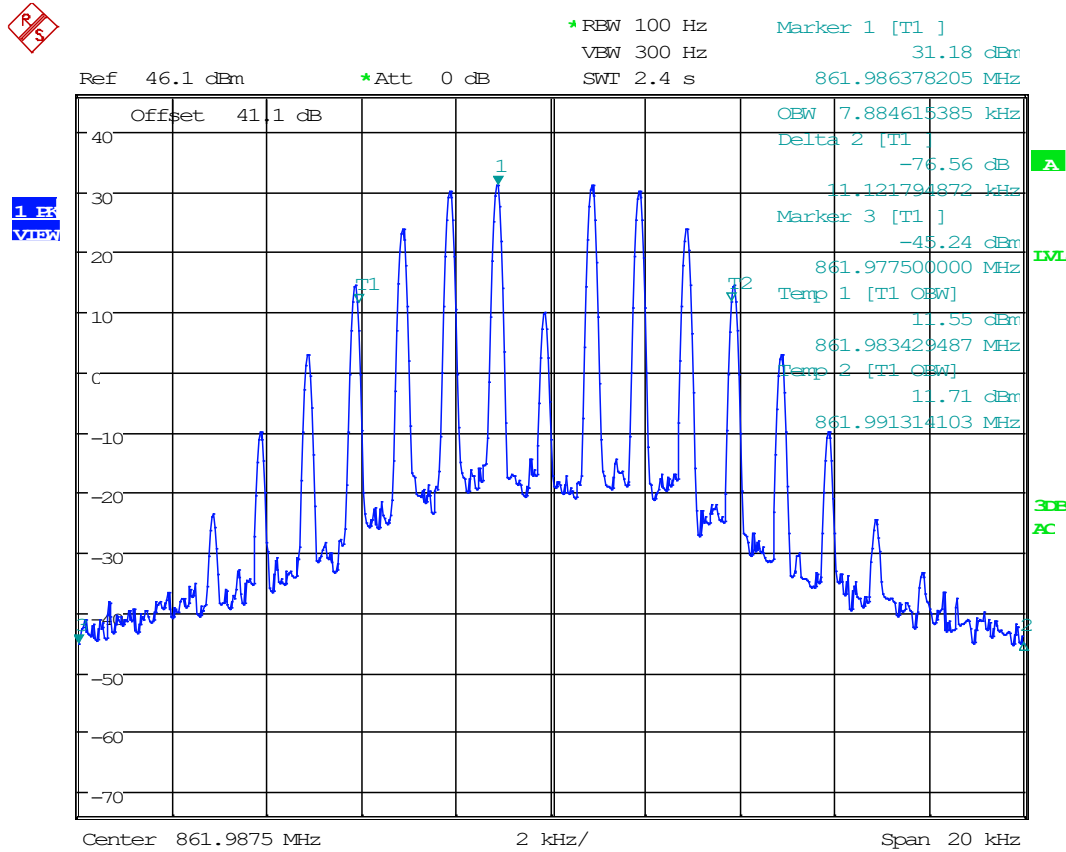
OBW: 4.039 kHz



Date: 22.APR.2020 15:08:14

OCCUPIED BANDWIDTH**800 MHz Band, Downlink, 12.5k FM**

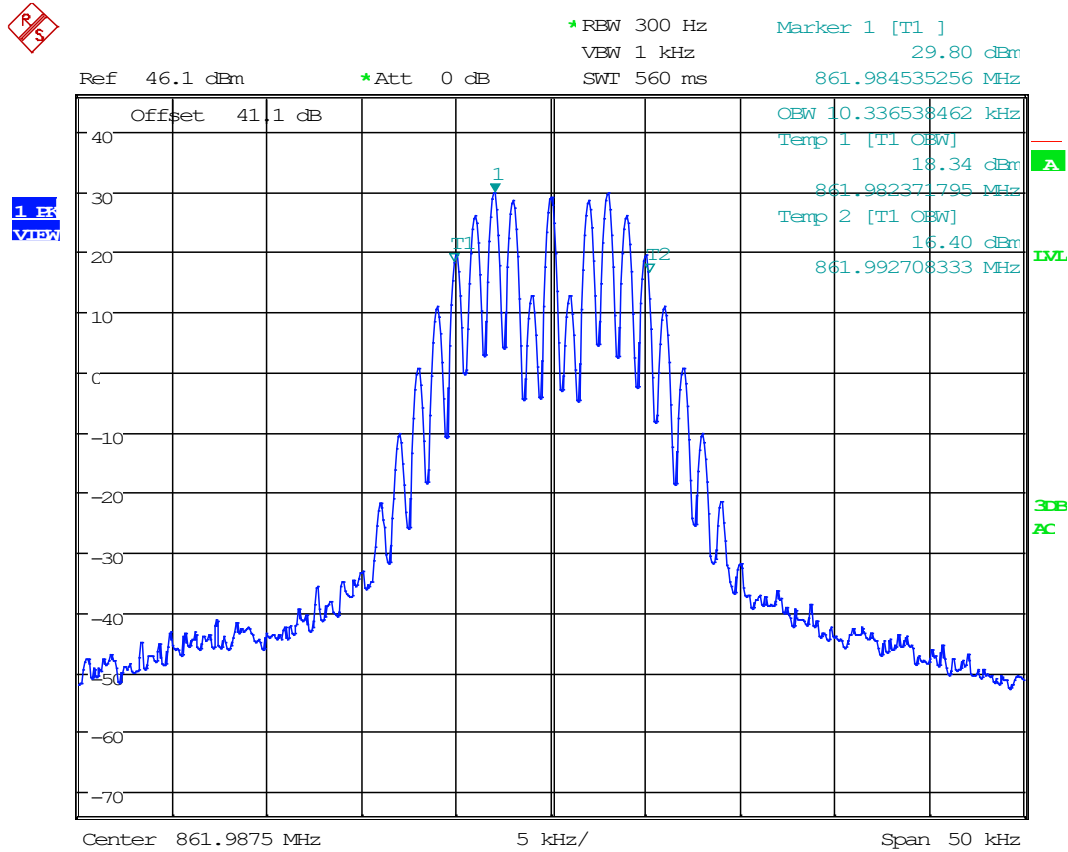
OBW: 7.89 kHz



Date: 22.APR.2020 15:06:13

OCCUPIED BANDWIDTH**800 MHz Band, Downlink, 16k FM**

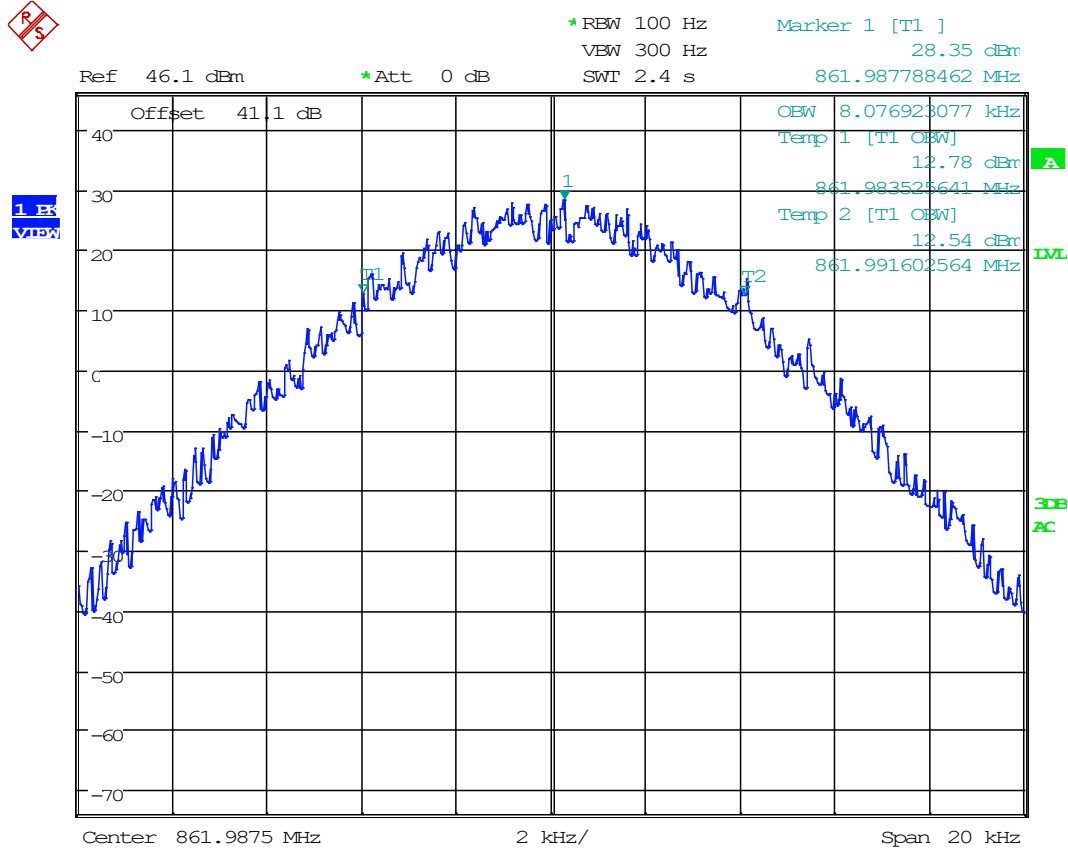
OBW: 10.34 kHz



Date: 22.APR.2020 15:10:13

OCCUPIED BANDWIDTH**800 MHz Band, Downlink, C4FM**

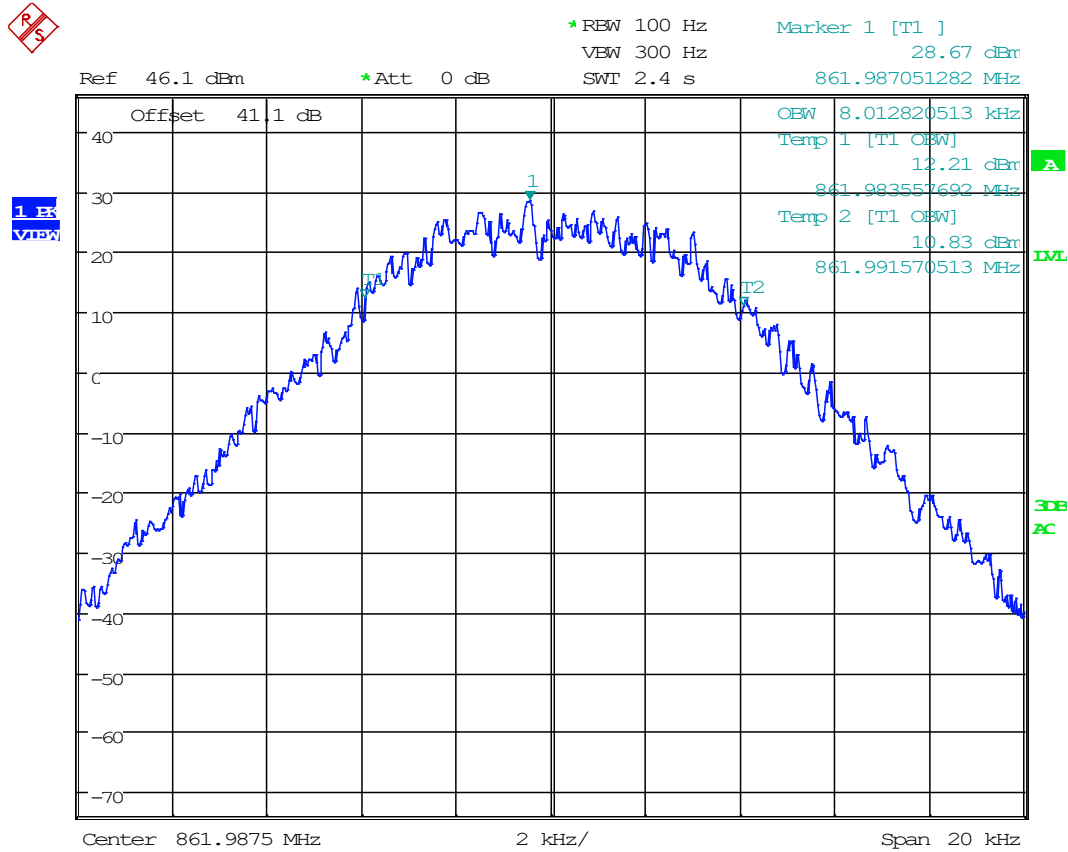
OBW: 8.08 kHz



Date: 22.APR.2020 15:11:32

OCCUPIED BANDWIDTH**800 MHz Band, Downlink, H-CPM**

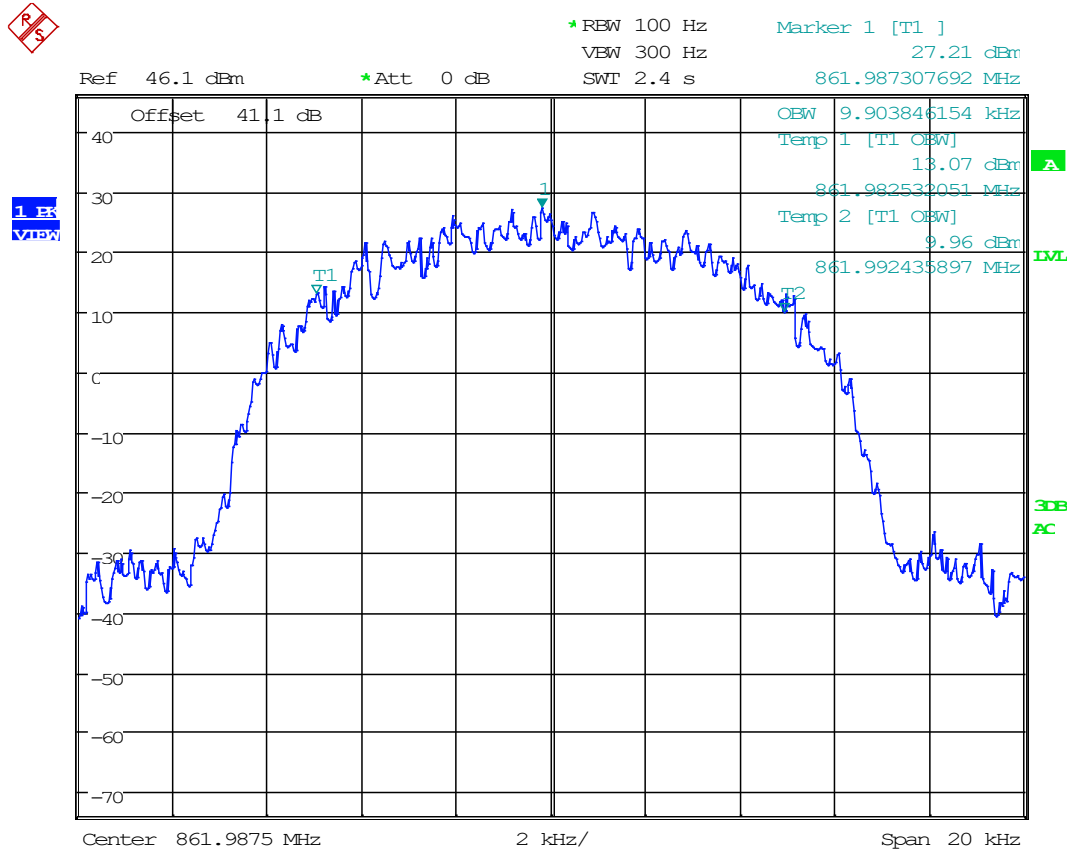
OBW: 8.01 kHz



Date: 22.APR.2020 15:12:20

OCCUPIED BANDWIDTH**800 MHz Band, Downlink, H-DQPSK**

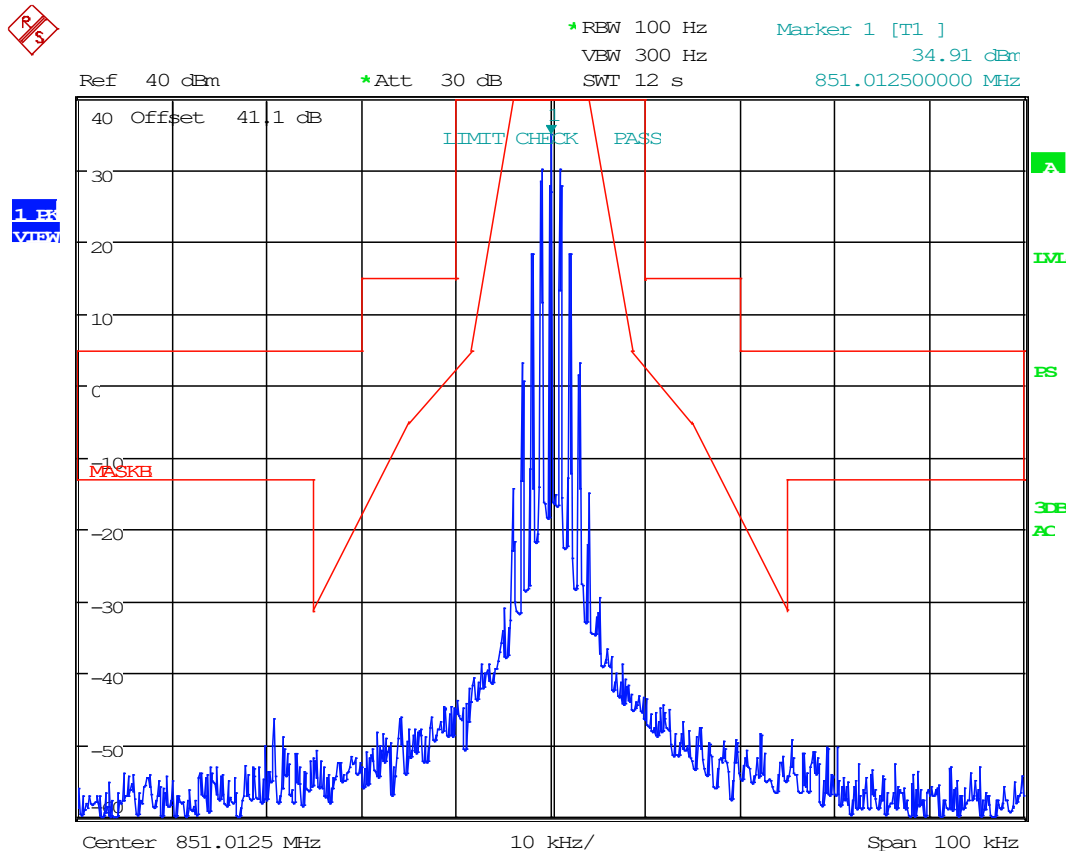
OBW: 9.904 kHz



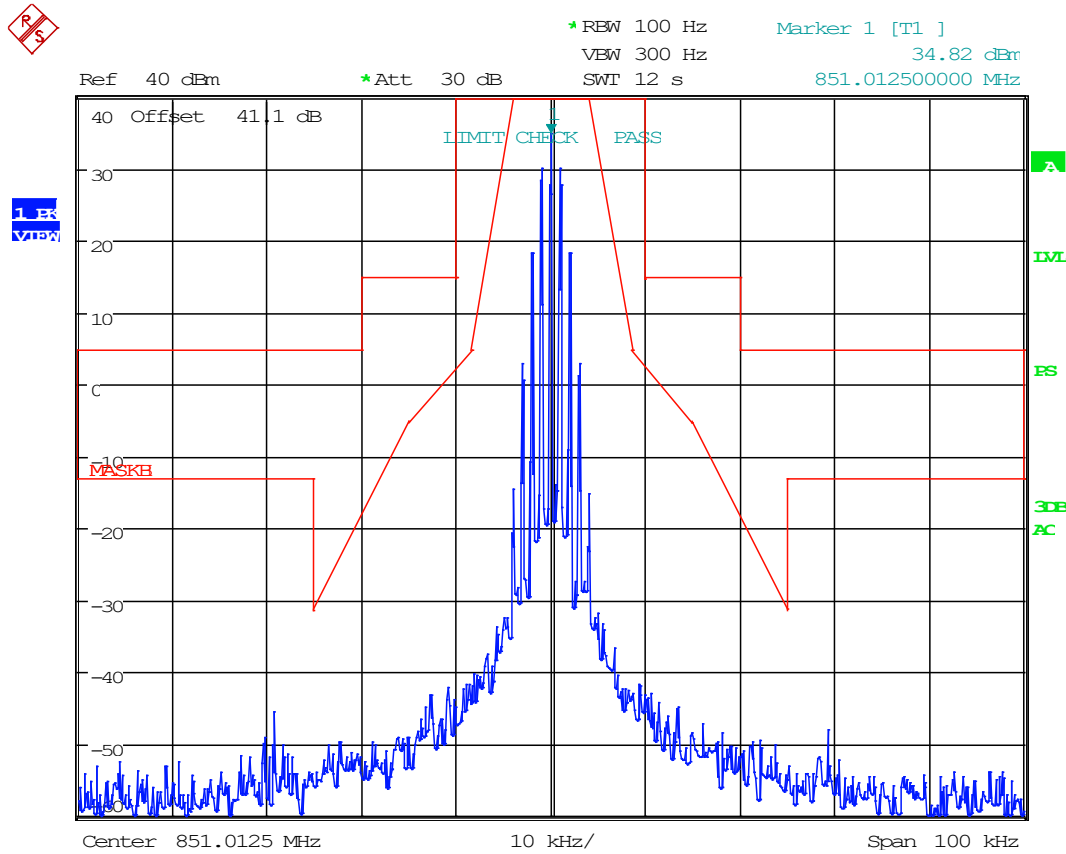
Date: 22.APR.2020 15:13:04

90.210 EMISSION MASKS**KDB 935210 4.4 INPUT VS OUTPUT COMPARISON**

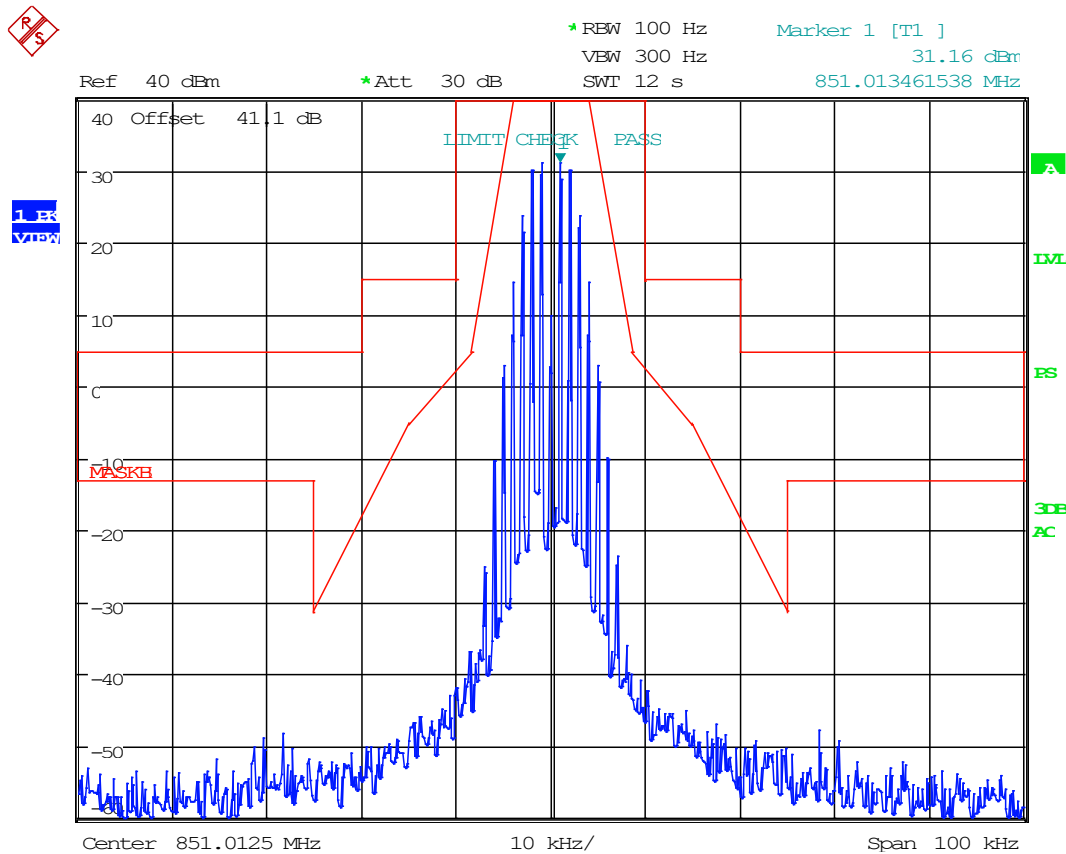
Test Engineer: FR
 Test Date: 4/22/2020

800 MHz Band, Downlink, 6.25k FM, At AGC

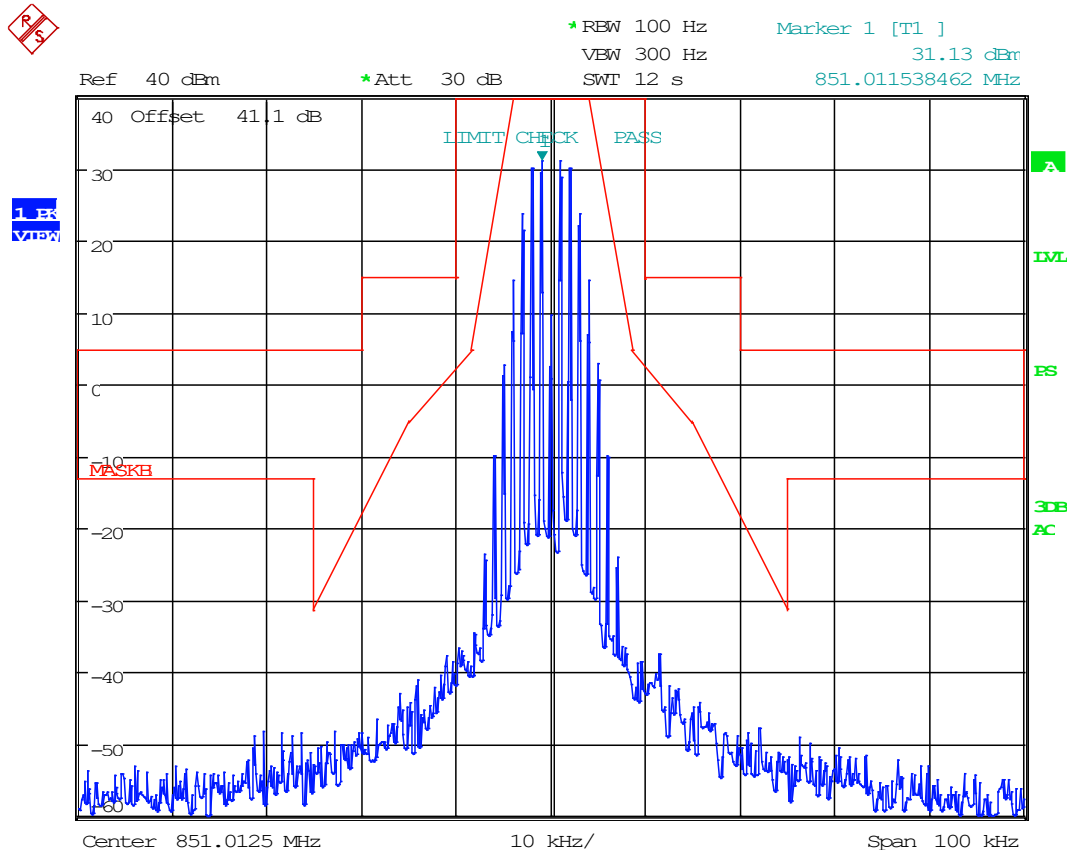
Date: 22.APR.2020 17:13:11

EMISSION MASK & IVO**800 MHz Band, Downlink, 6.25k FM, At AGC +3 dB**

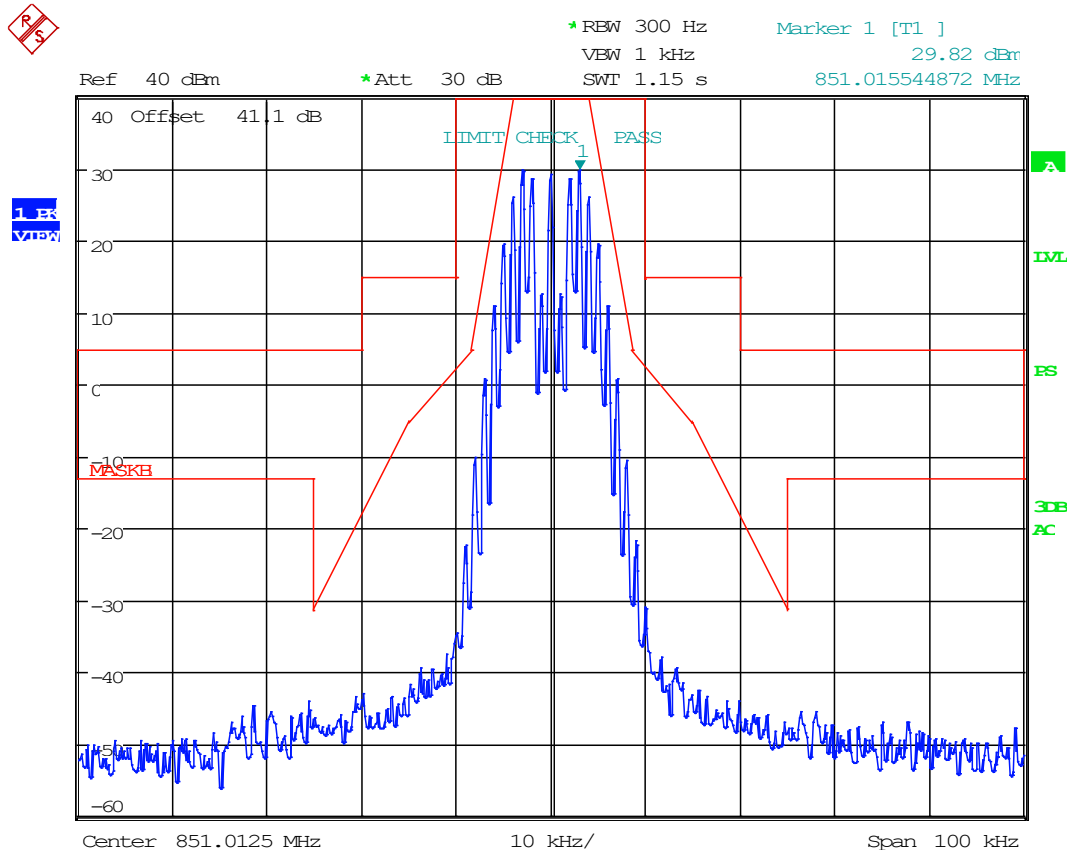
Date: 22.APR.2020 17:13:43

EMISSION MASK & IVO**800 MHz Band, Downlink, 12.5k FM, At AGC**

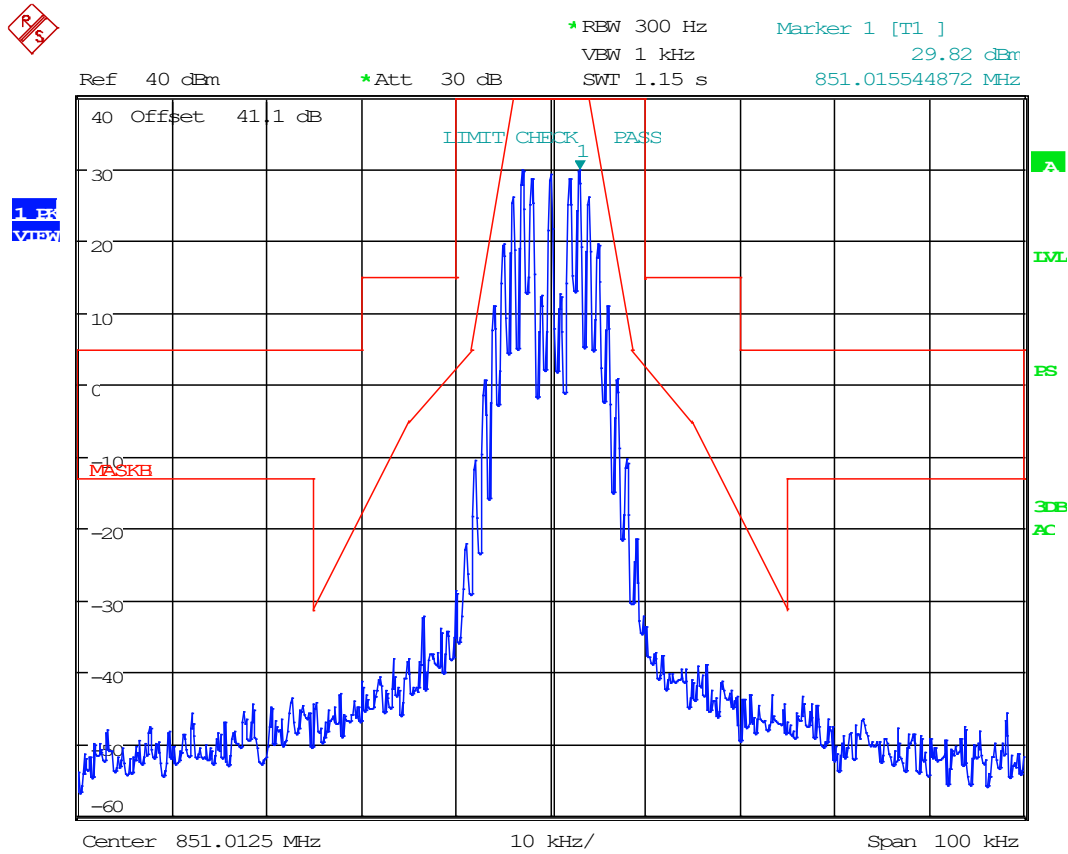
Date: 22.APR.2020 17:14:23

EMISSION MASK & IVO**800 MHz Band, Downlink, 12.5k FM, At AGC +3 dB**

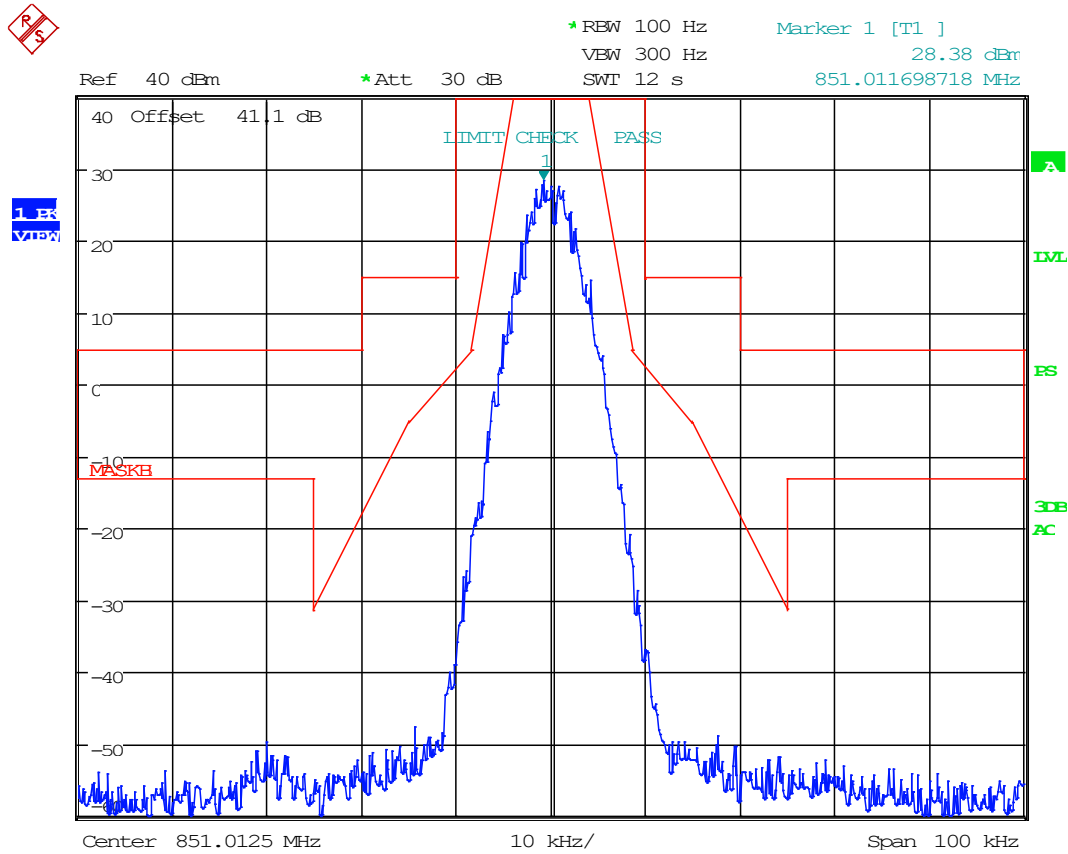
Date: 22.APR.2020 17:14:56

EMISSION MASK & IVO**800 MHz Band, Downlink, 16k FM, At AGC**

Date: 22.APR.2020 17:15:33

EMISSION MASK & IVO**800 MHz Band, Downlink, 16k FM, At AGC +3 dB**

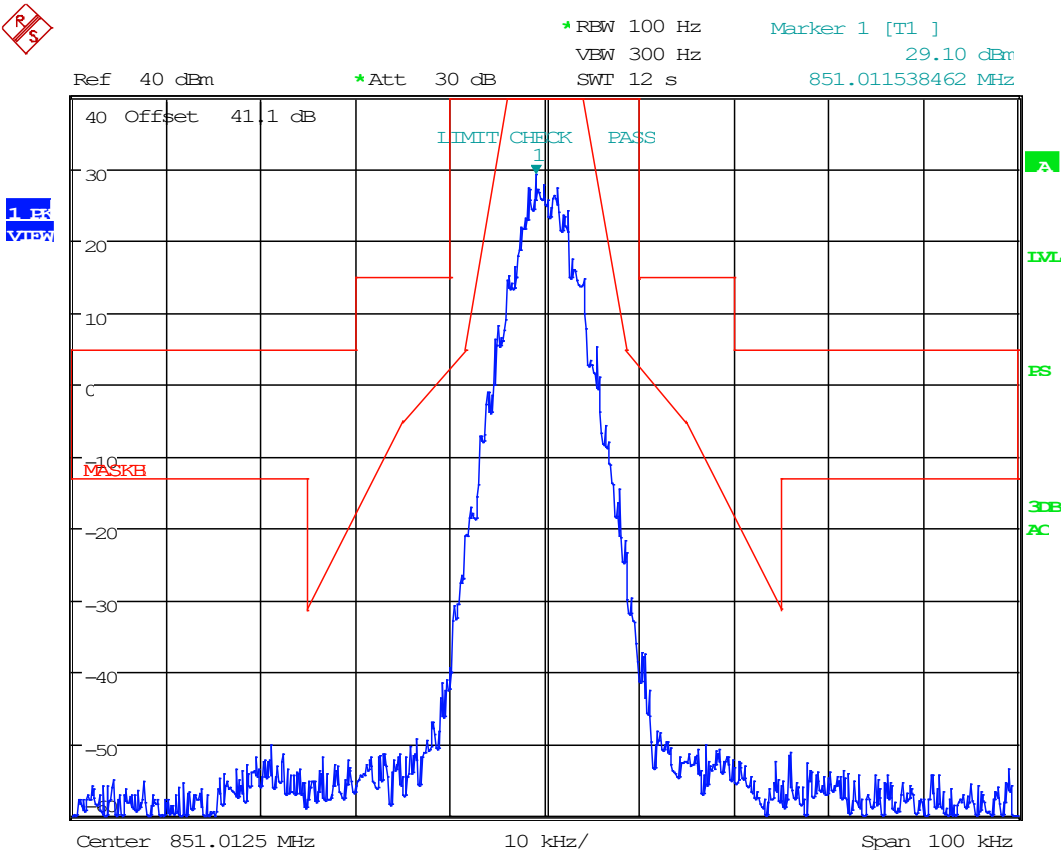
Date: 22.APR.2020 17:16:44

EMISSION MASK & IVO**800 MHz Band, Downlink, C4FM, At AGC**

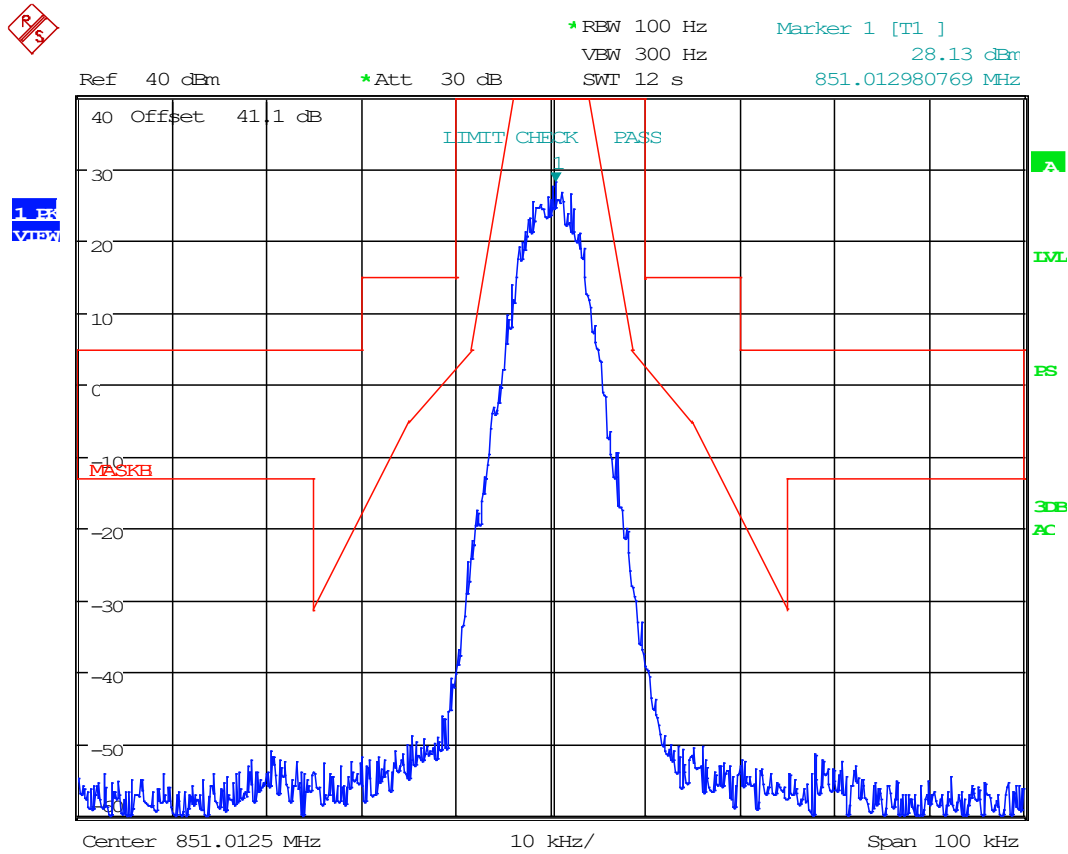
Date: 22.APR.2020 17:18:19

EMISSION MASK & IVO

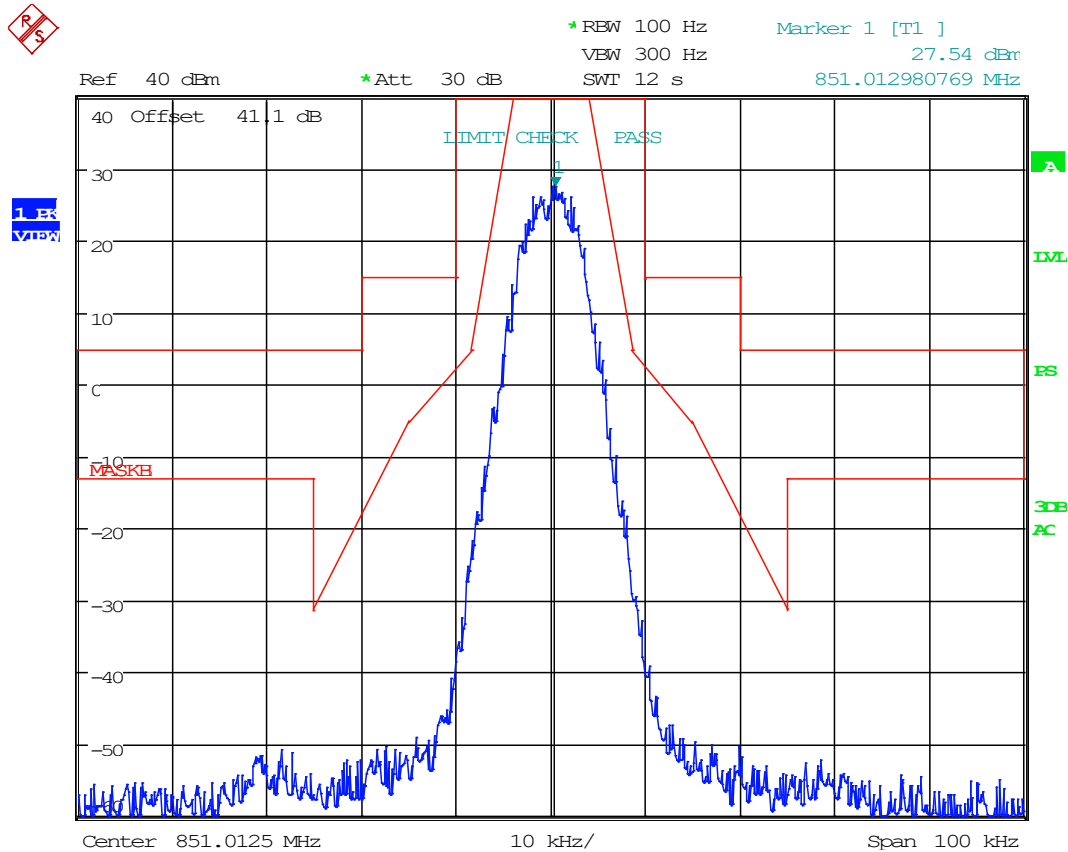
800 MHz Band, Downlink, C4FM, At AGC +3 dB



Date: 22.APR.2020 17:19:08

EMISSION MASK & IVO**800 MHz Band, Downlink, H-CPM, AT AGC**

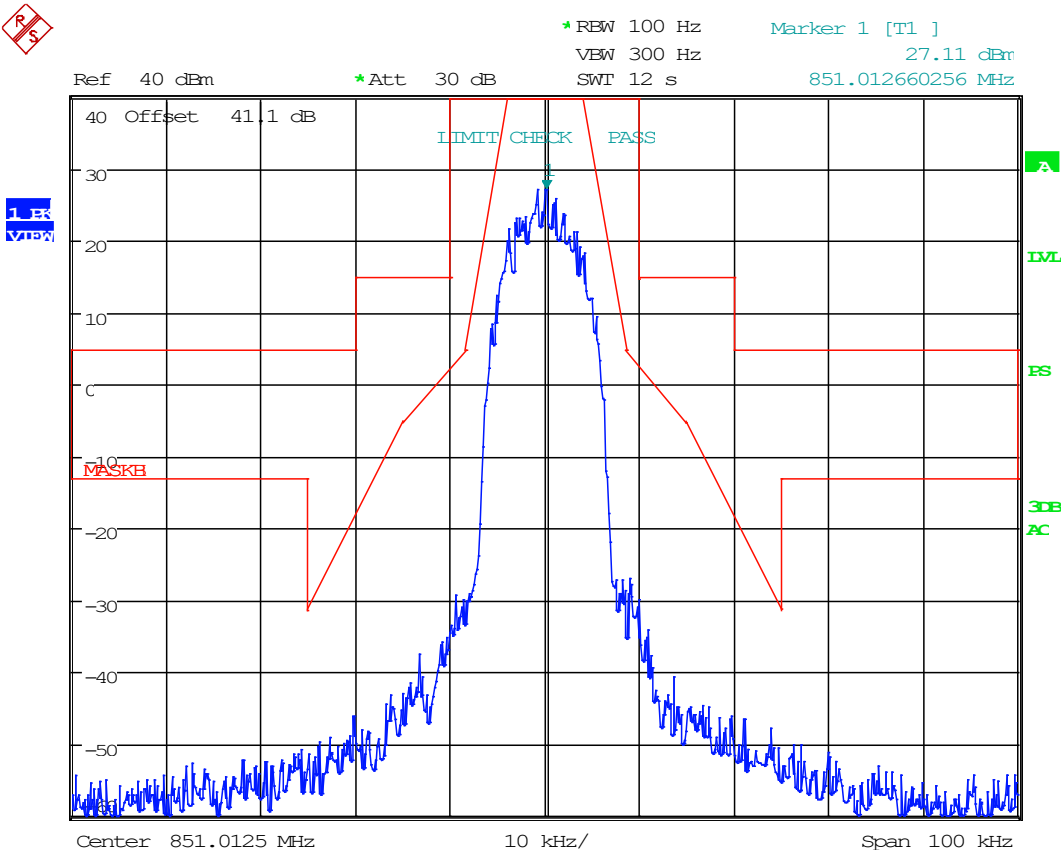
Date: 22.APR.2020 17:20:21

EMISSION MASK & IVO**800 MHz Band, Downlink, H-CPM, AT AGC +3 DB**

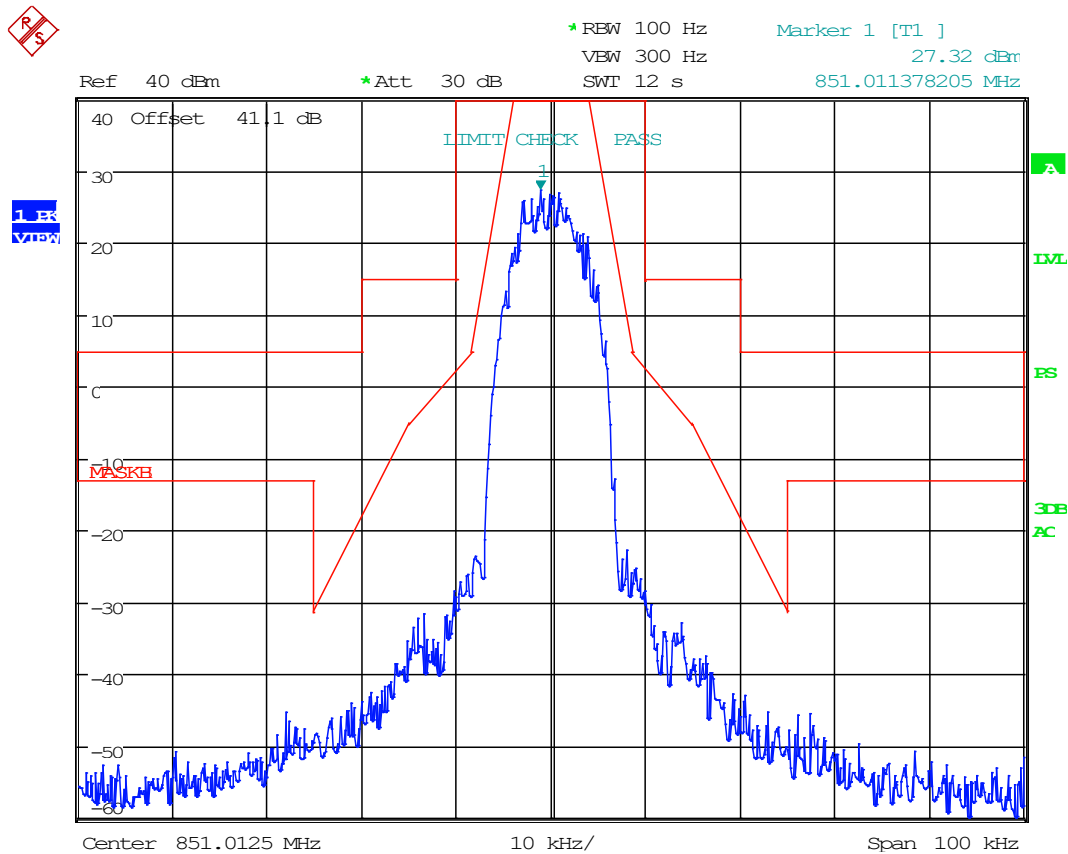
Date: 22.APR.2020 17:21:24

EMISSION MASK & IVO

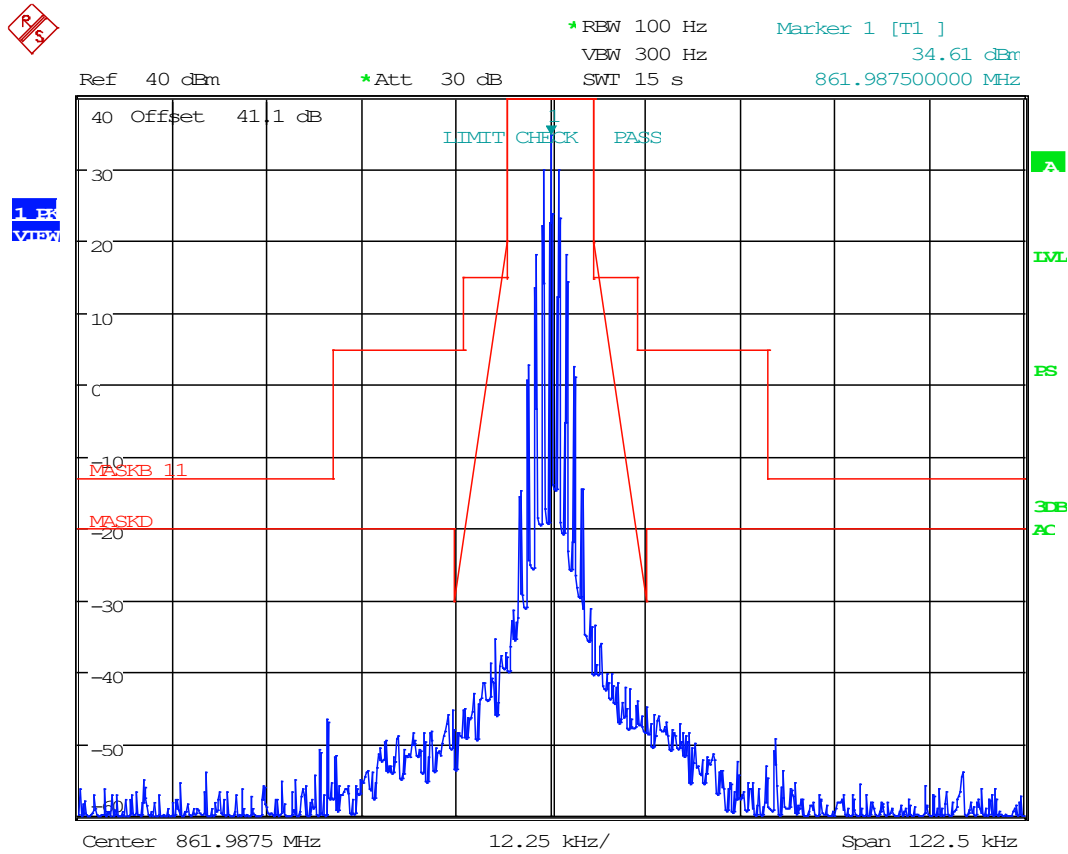
800 MHz Band, Downlink, H-DQPSK, AT AGC



Date: 22.APR.2020 17:22:03

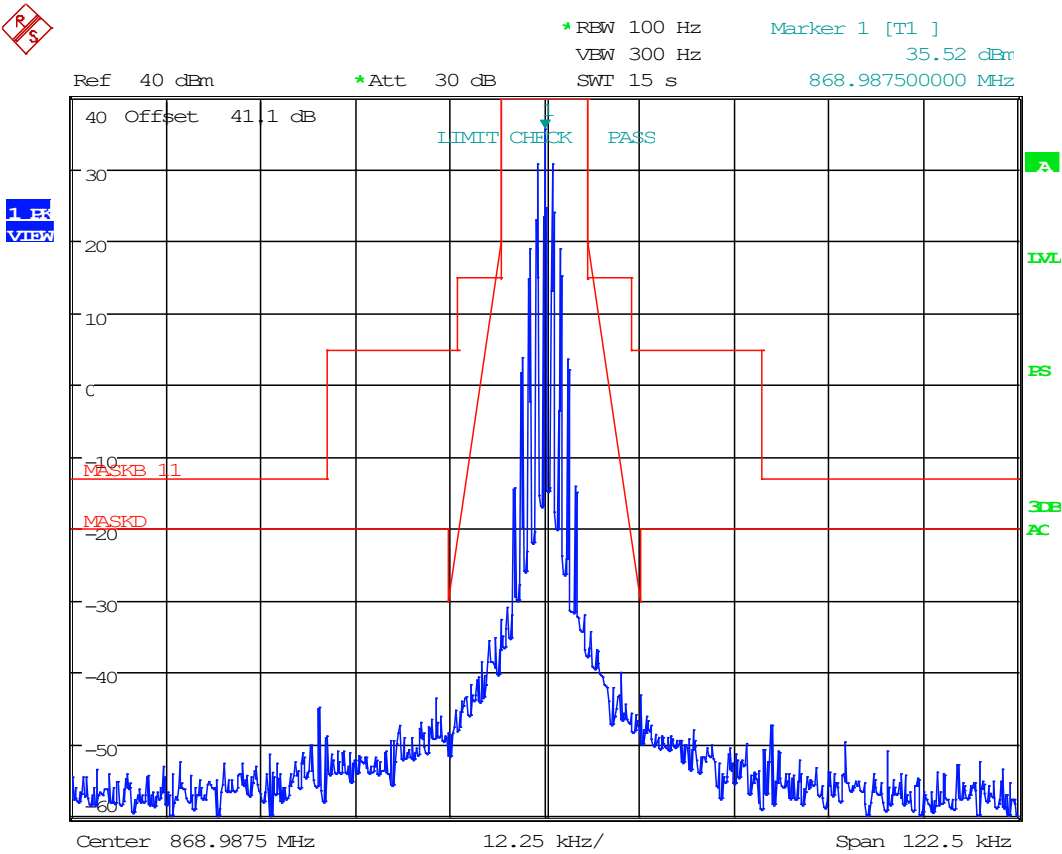
EMISSION MASK & IVO**800 MHz Band, Downlink, H-DQPSK, AT AGC +3 DB**

Date: 22.APR.2020 17:22:46

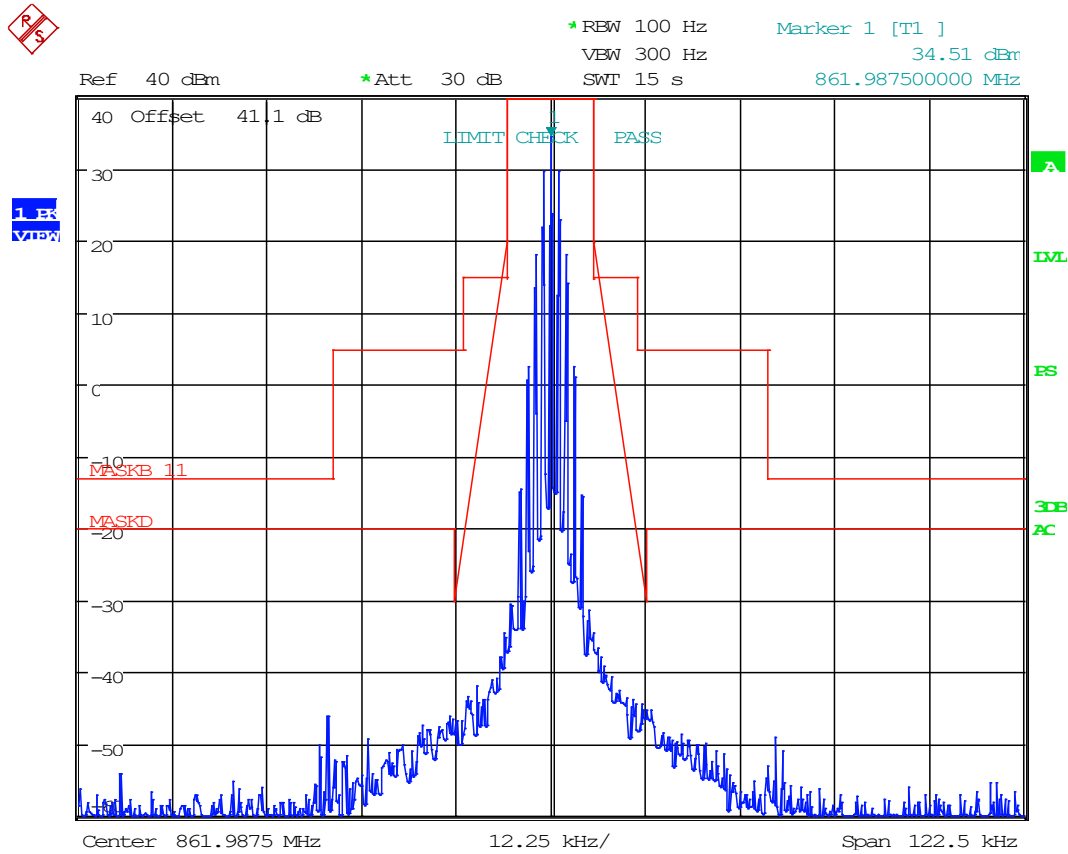
EMISSION MASK & IVO**800 MHz Band, Downlink, 6.25k FM, At AGC**

Date: 22.APR.2020 16:36:27

EMISSION MASK & IVO

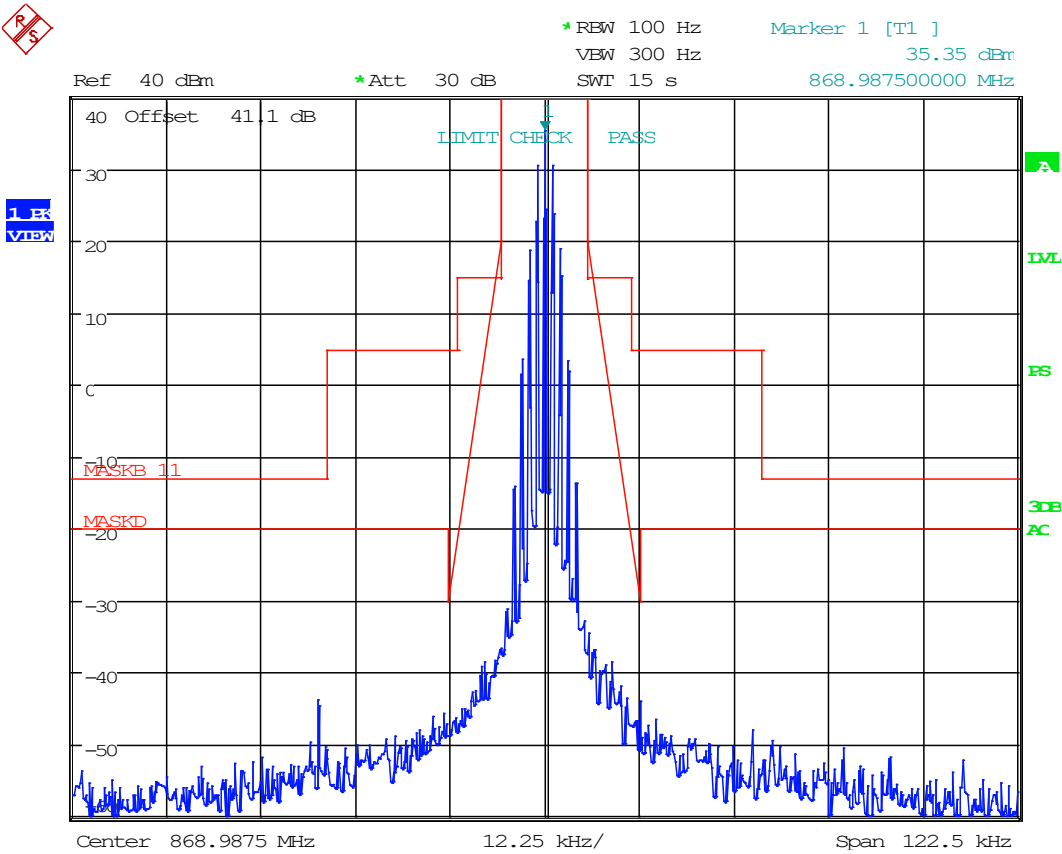


Date: 22.APR.2020 16:46:27

EMISSION MASK & IVO**800 MHz Band, Downlink, 6.25k FM, At AGC +3 dB**

Date: 22.APR.2020 16:37:11

EMISSION MASK & IVO

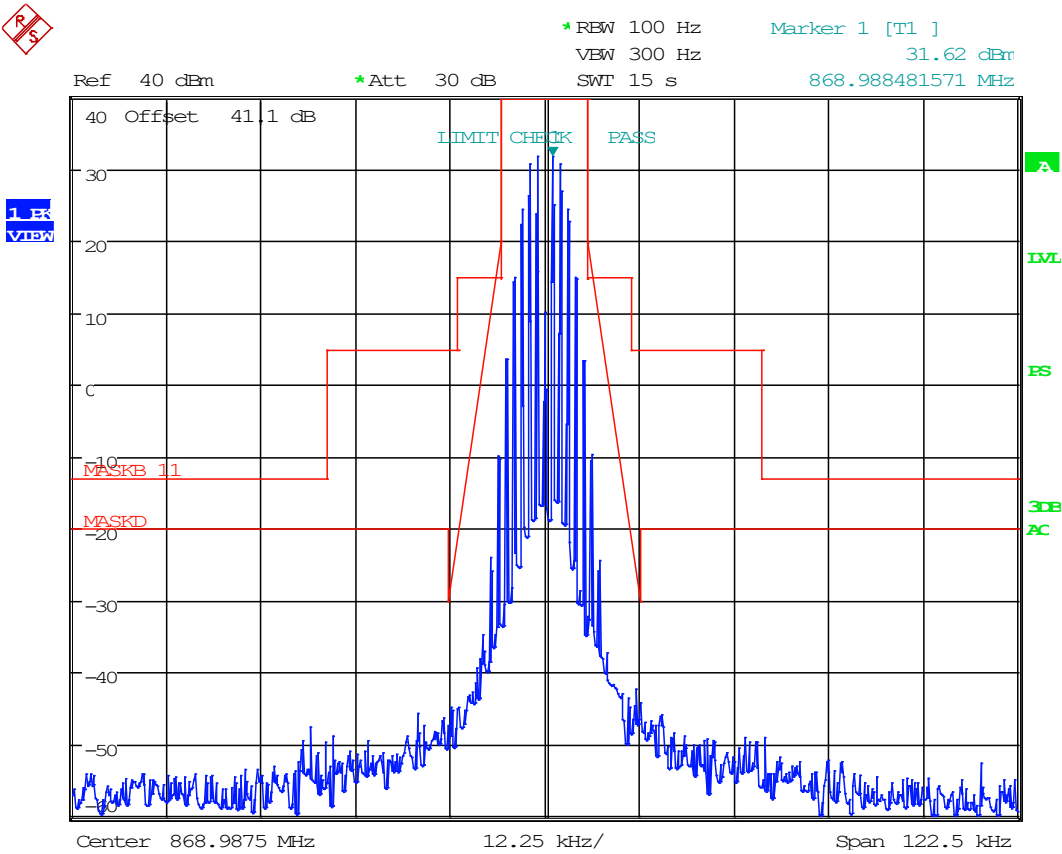


Date: 22.APR.2020 16:47:12

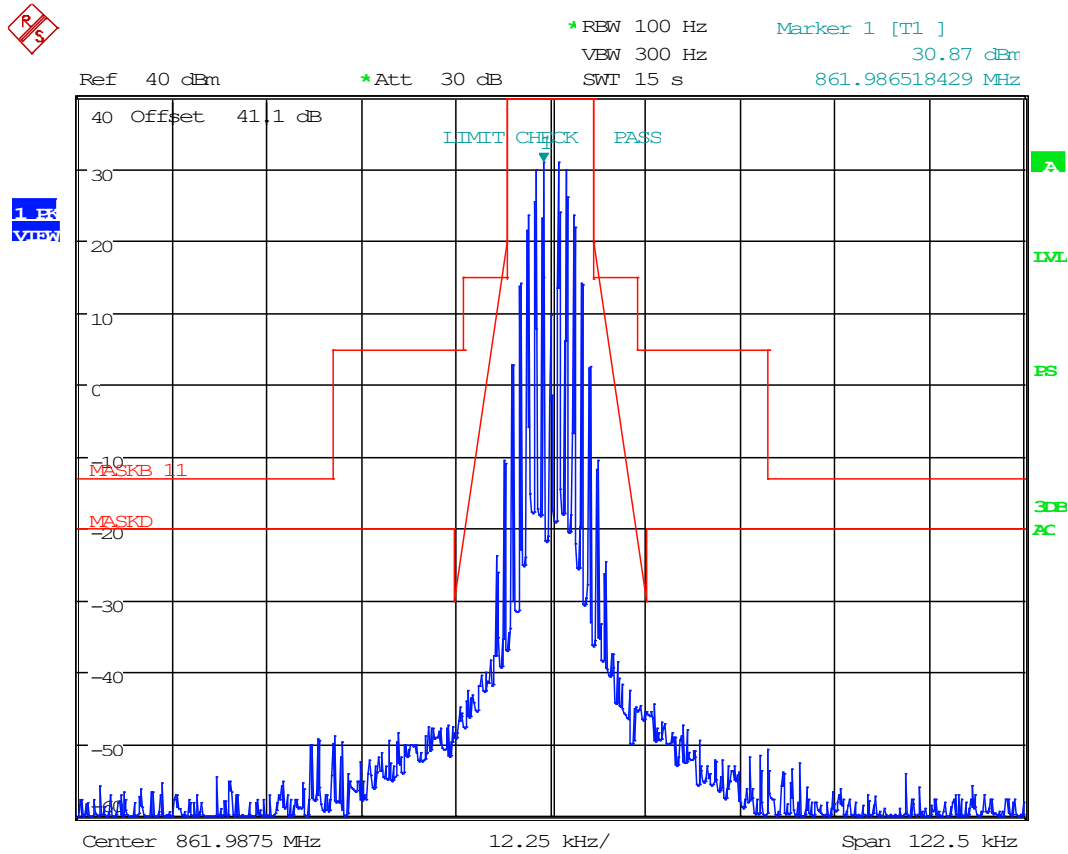
800 MHz Band, Downlink, 12.5k FM, At AGC

Date: 22.APR.2020 16:37:56

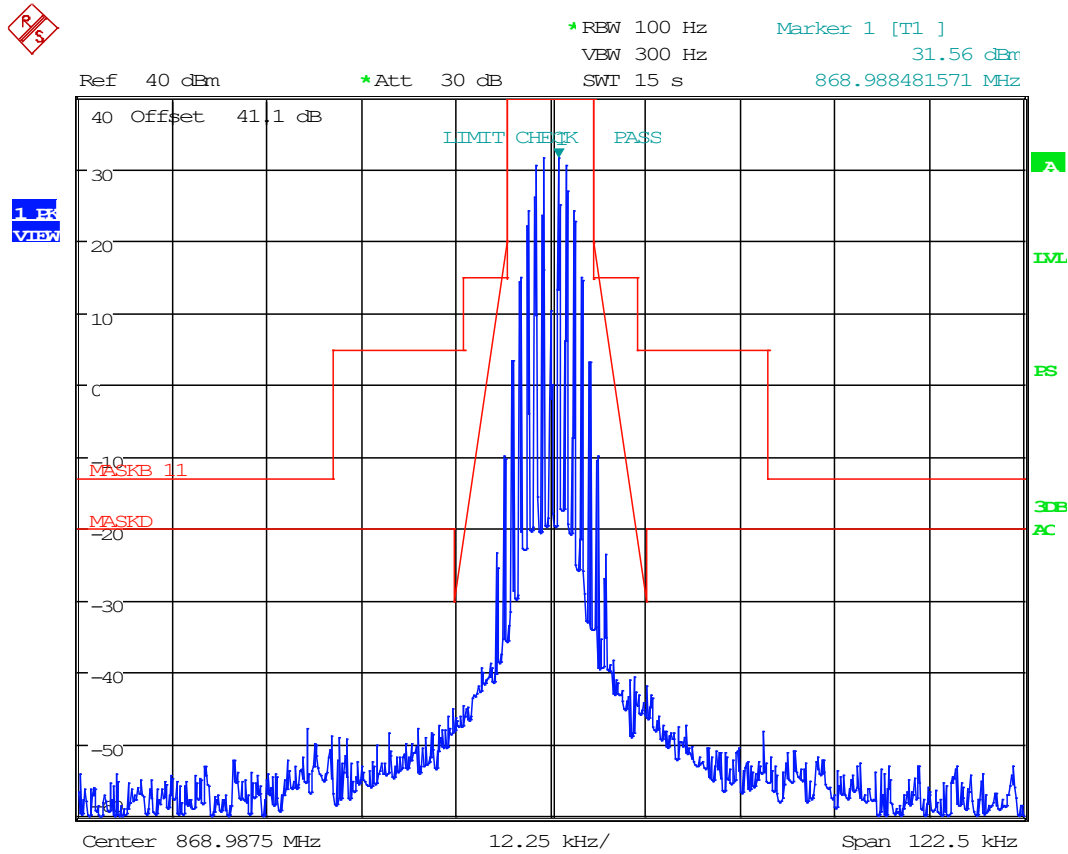
EMISSION MASK & IVO



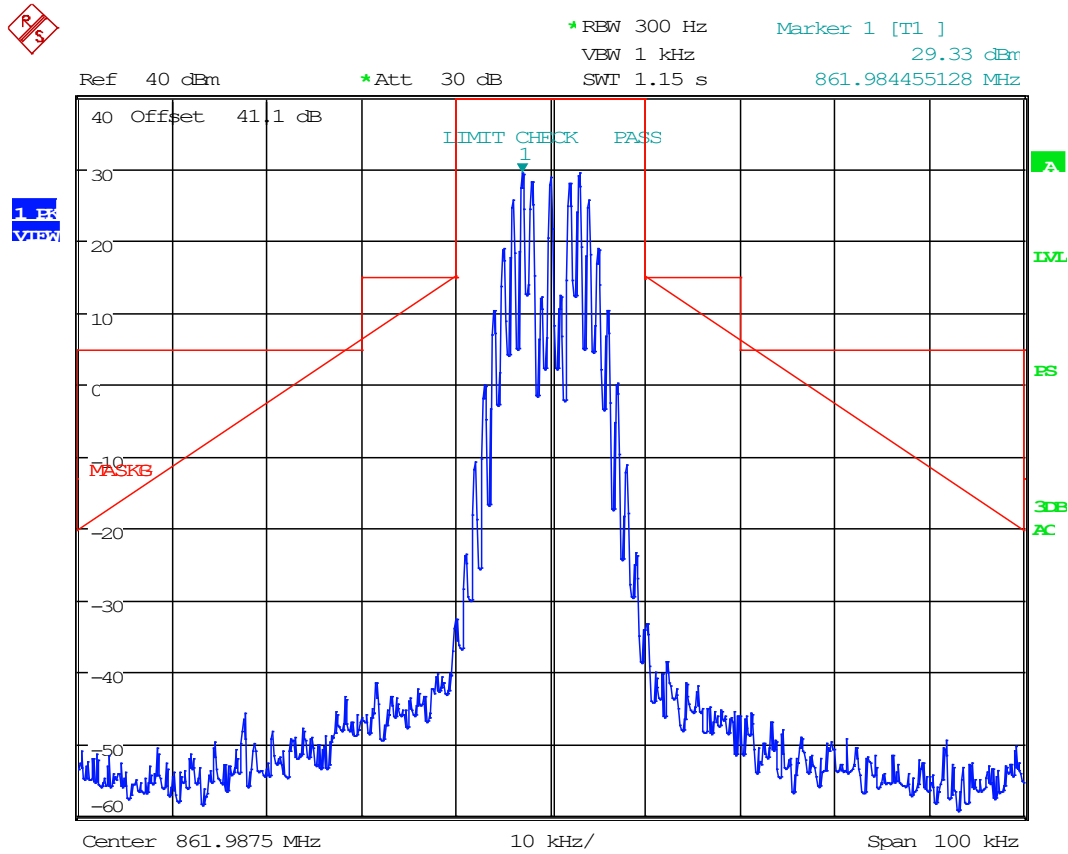
Date: 22.APR.2020 16:48:35

EMISSION MASK & IVO**800 MHz Band, Downlink, 12.5k FM, At AGC +3 dB**

Date: 22.APR.2020 16:38:37

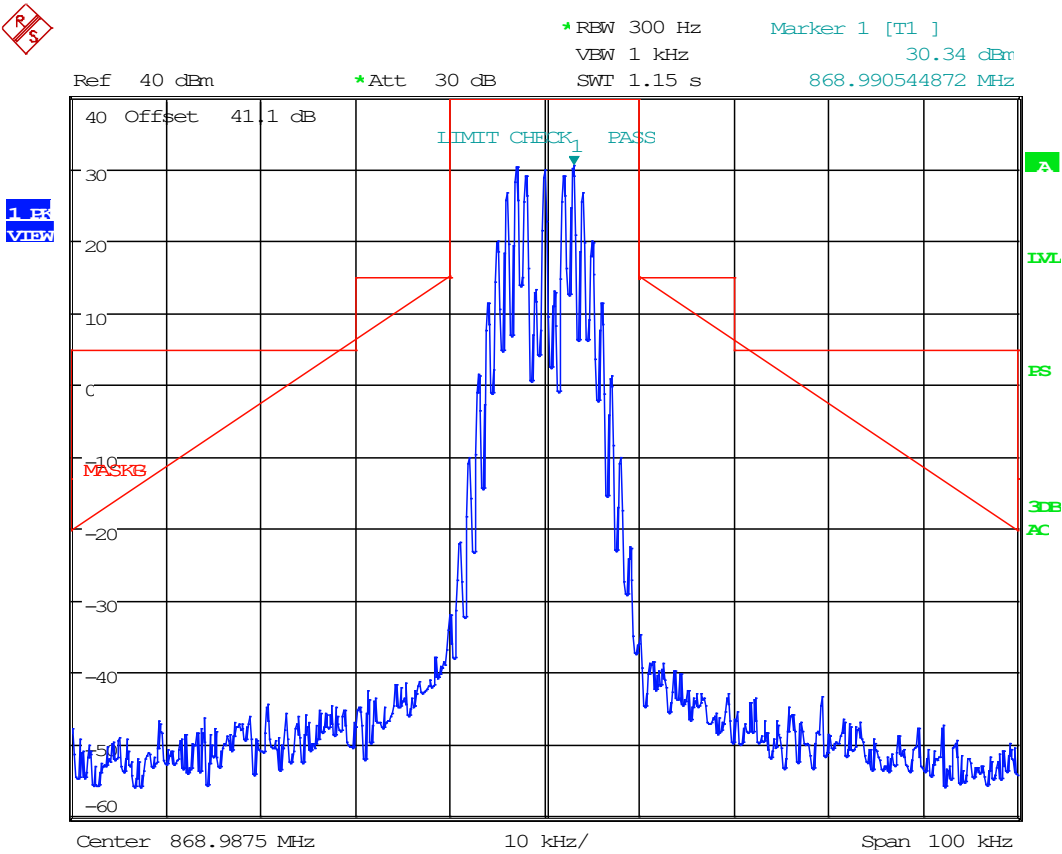
EMISSION MASK & IVO

Date: 22.APR.2020 16:49:14

EMISSION MASK & IVO**800 MHz Band, Downlink, 16k FM, At AGC**

Date: 22.APR.2020 17:07:25

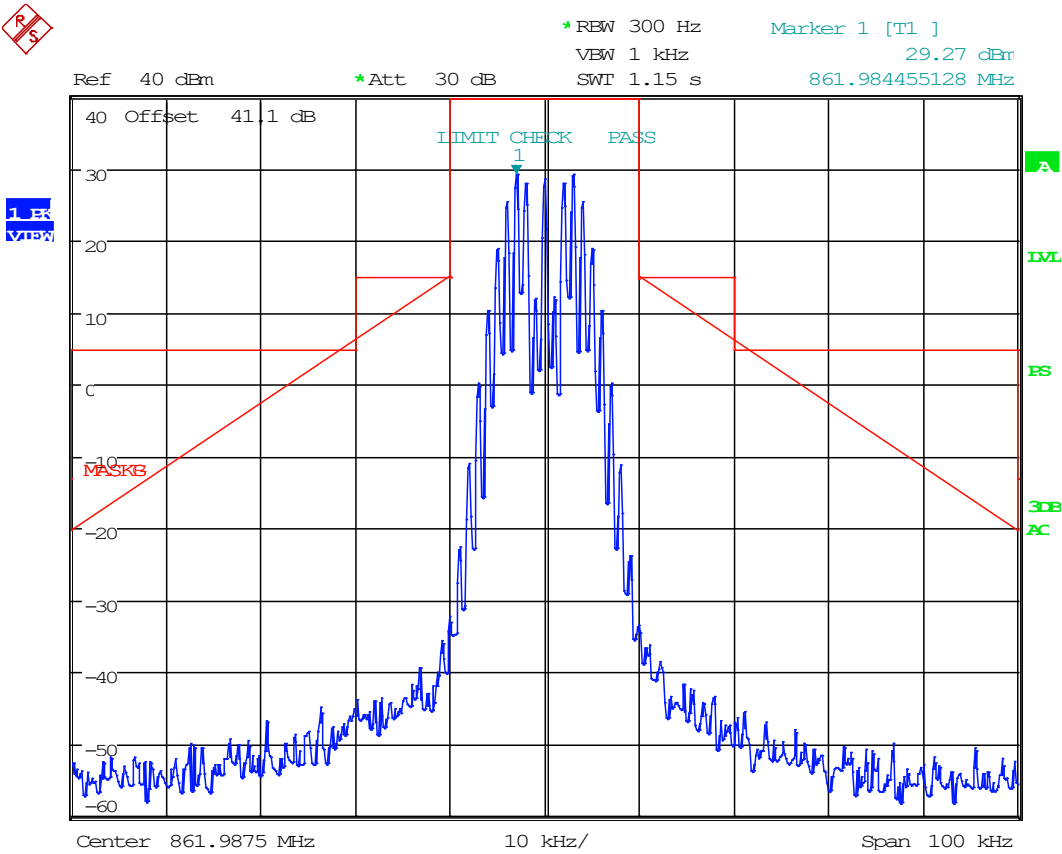
EMISSION MASK & IVO



Date: 22.APR.2020 17:05:37

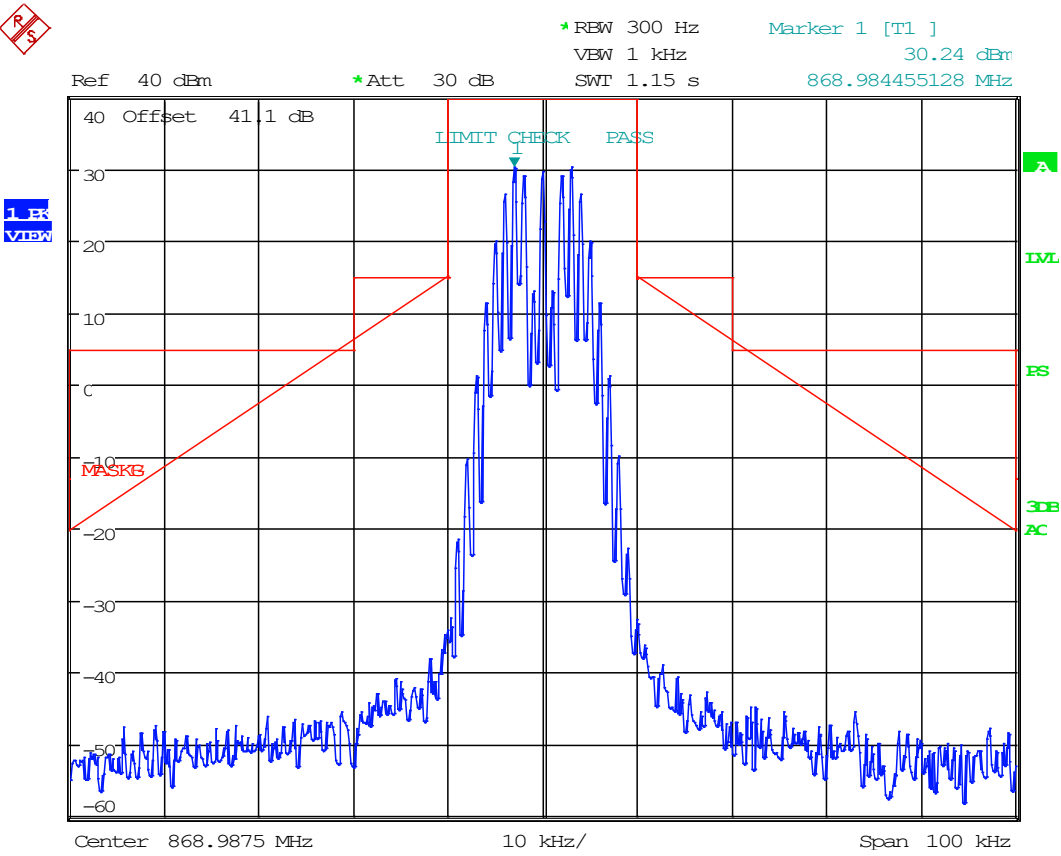
EMISSION MASK & IVO

800 MHz Band, Downlink, 16k FM, At AGC +3 dB

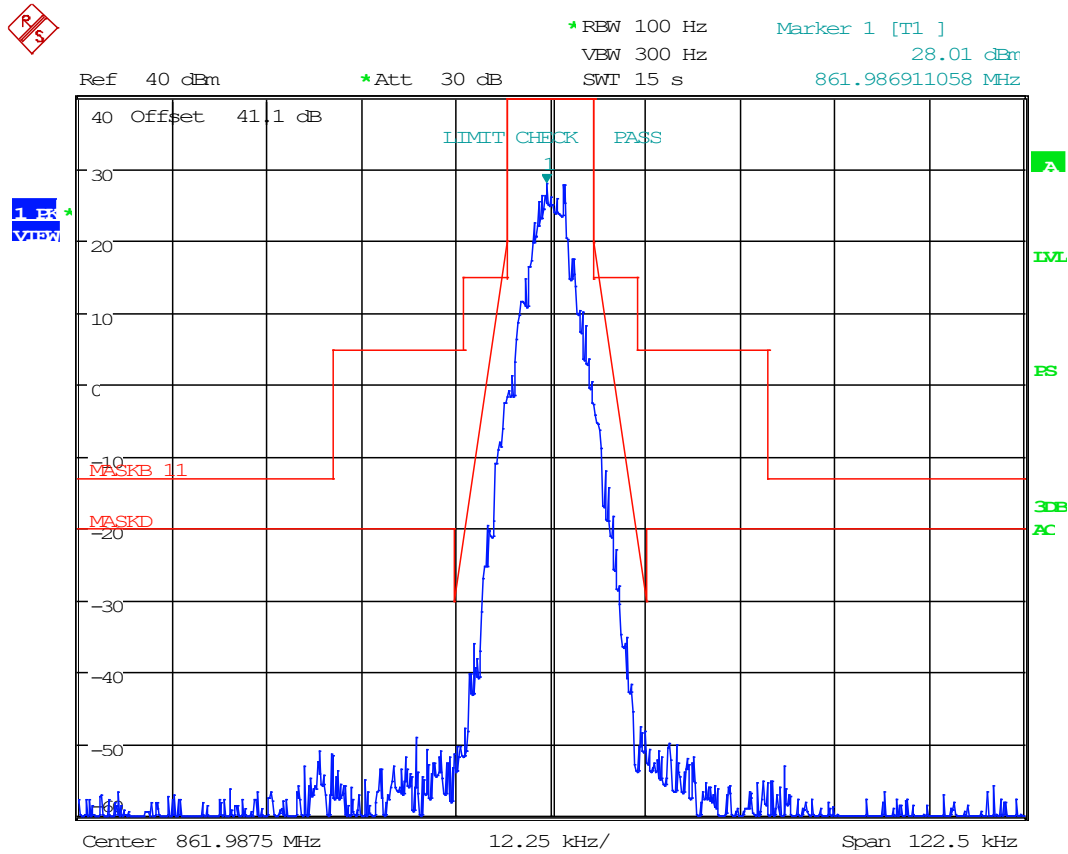


Date: 22.APR.2020 17:07:47

EMISSION MASK & IVO

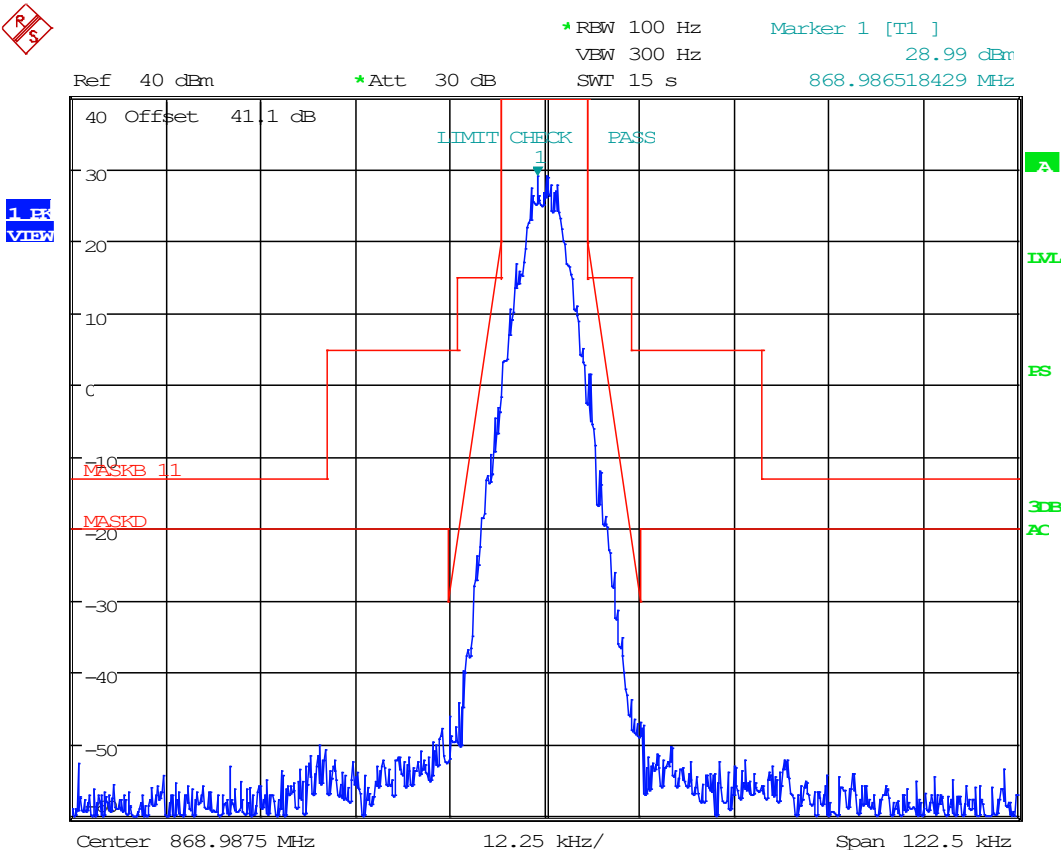


Date: 22.APR.2020 17:06:08

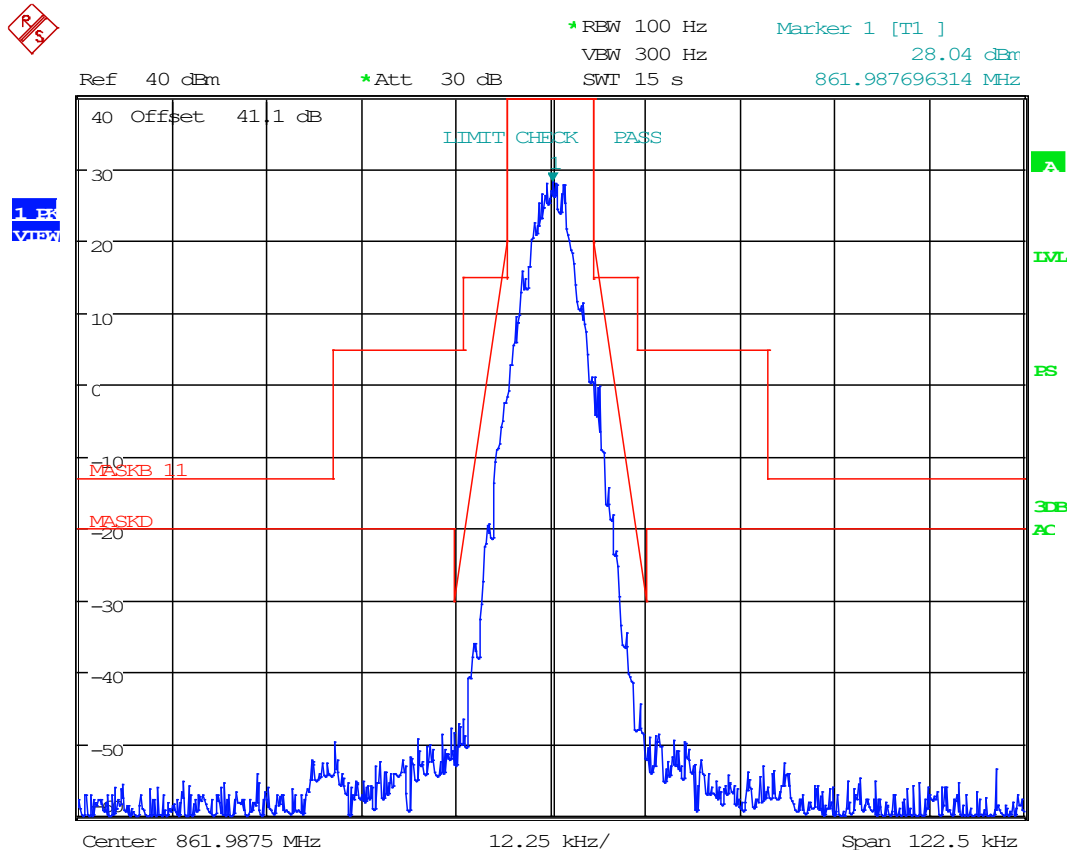
EMISSION MASK & IVO**800 MHz Band, Downlink, C4FM, At AGC**

Date: 22.APR.2020 16:39:46

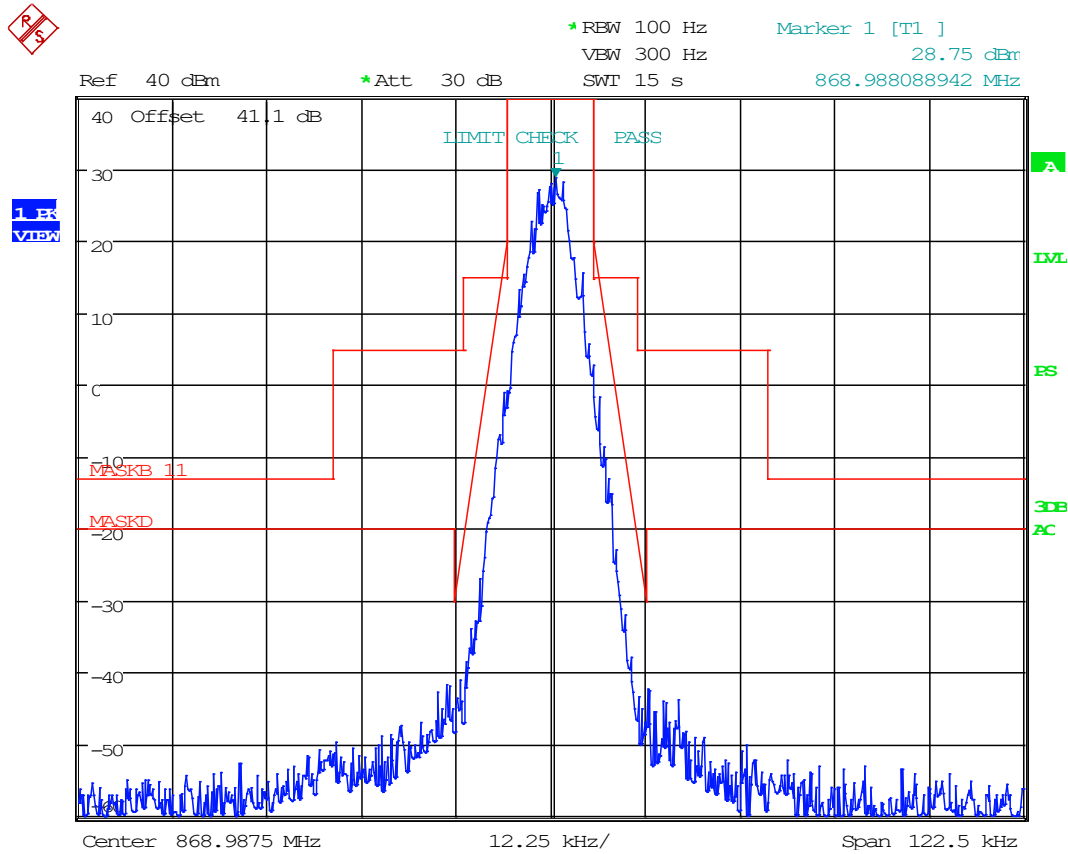
EMISSION MASK & IVO



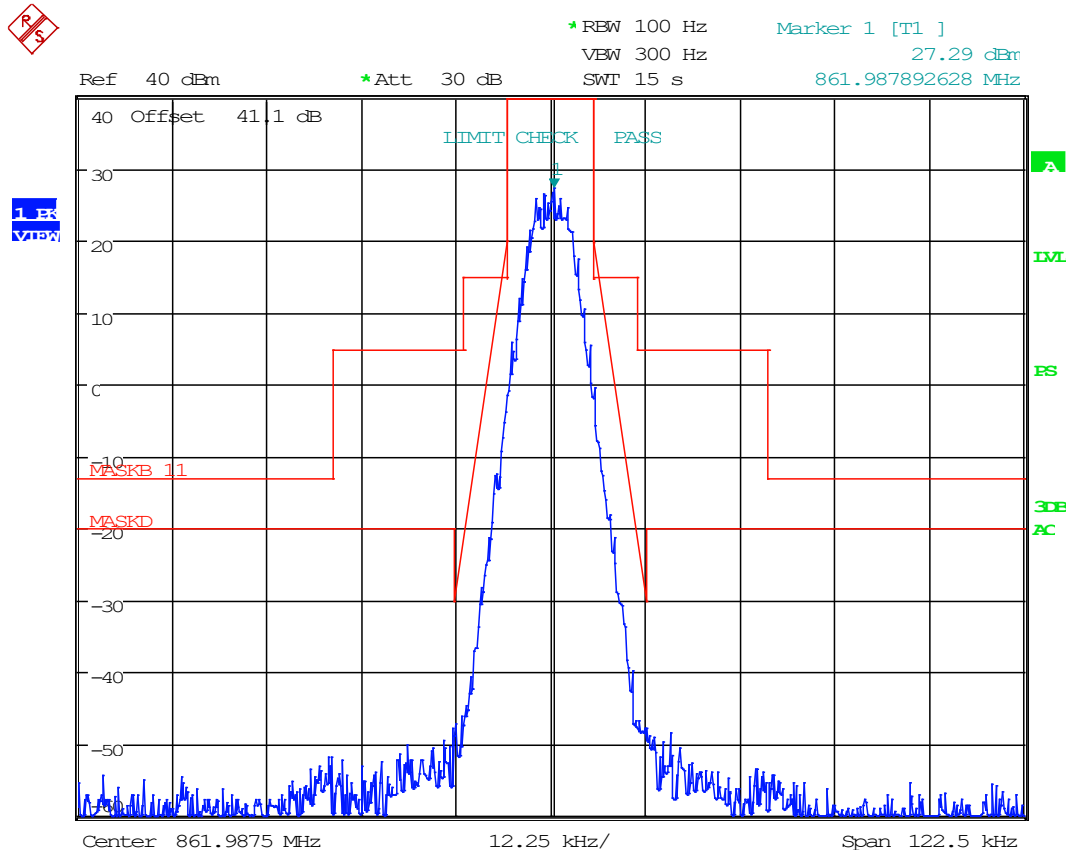
Date: 22.APR.2020 16:50:15

EMISSION MASK & IVO**800 MHz Band, Downlink, C4FM, At AGC +3 dB**

Date: 22.APR.2020 16:40:44

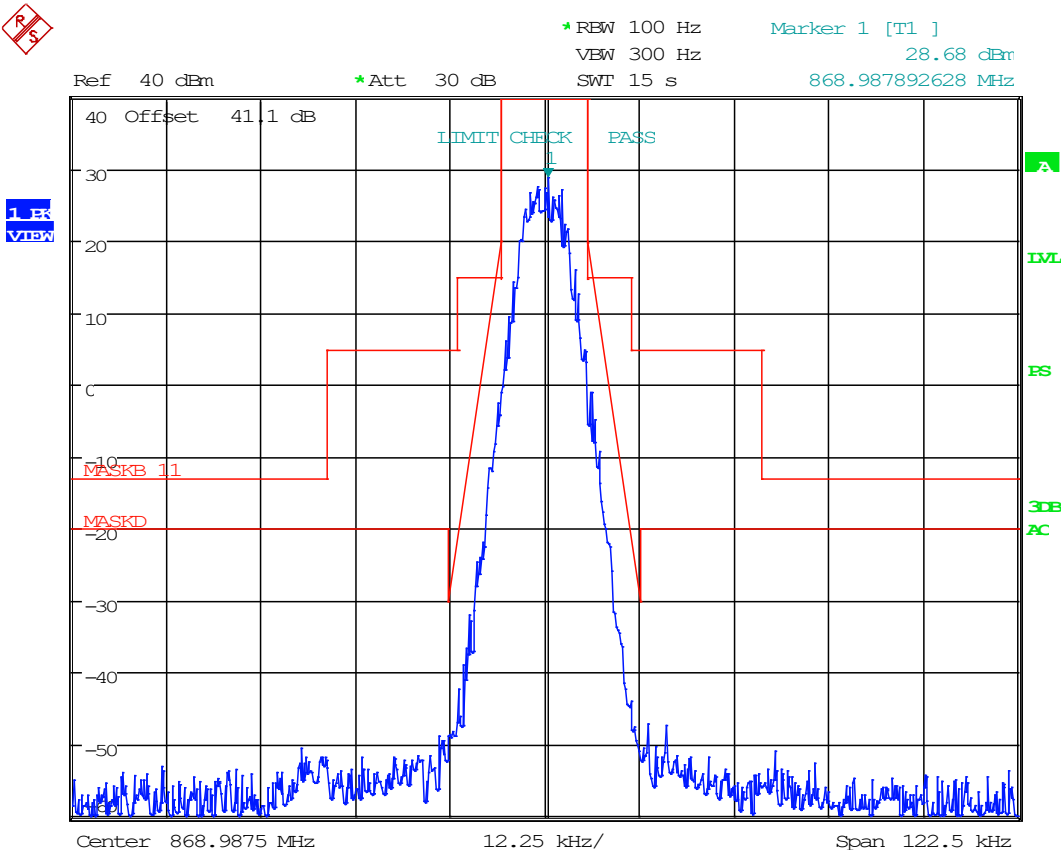
EMISSION MASK & IVO

Date: 22.APR.2020 16:51:11

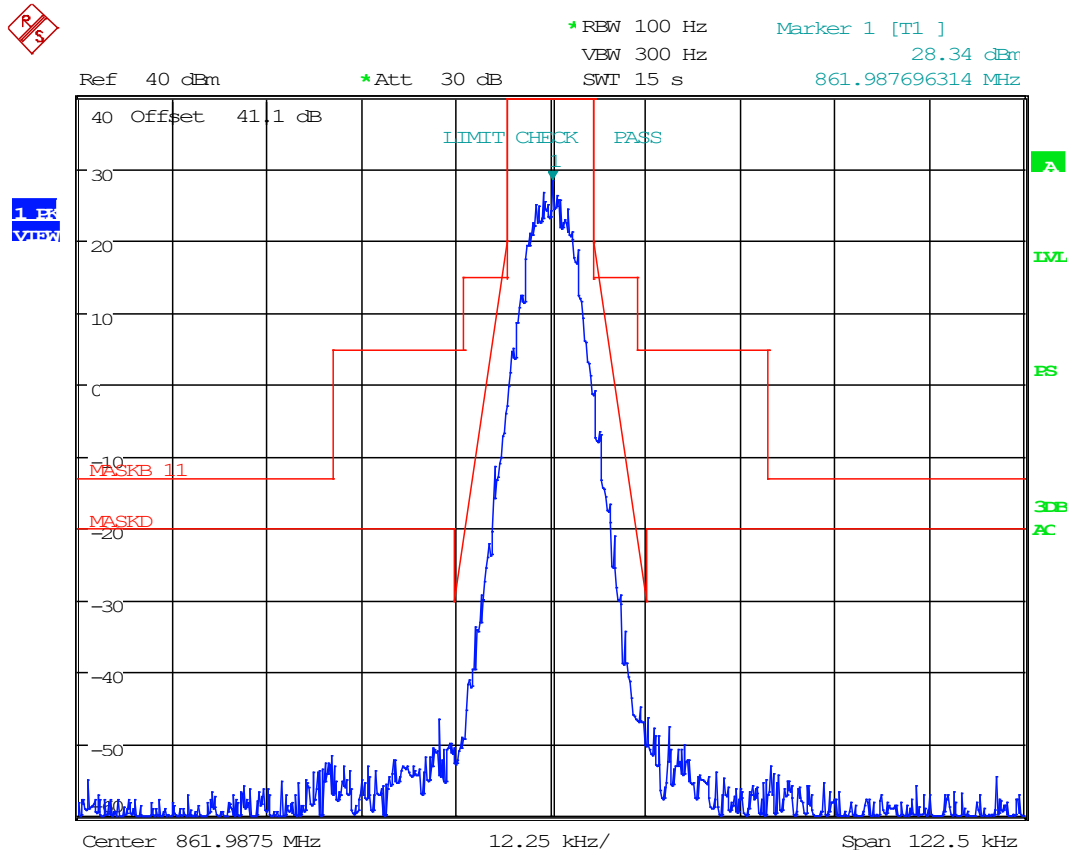
EMISSION MASK & IVO**800 MHz Band, Downlink, H-CPM, AT AGC**

Date: 22.APR.2020 16:41:29

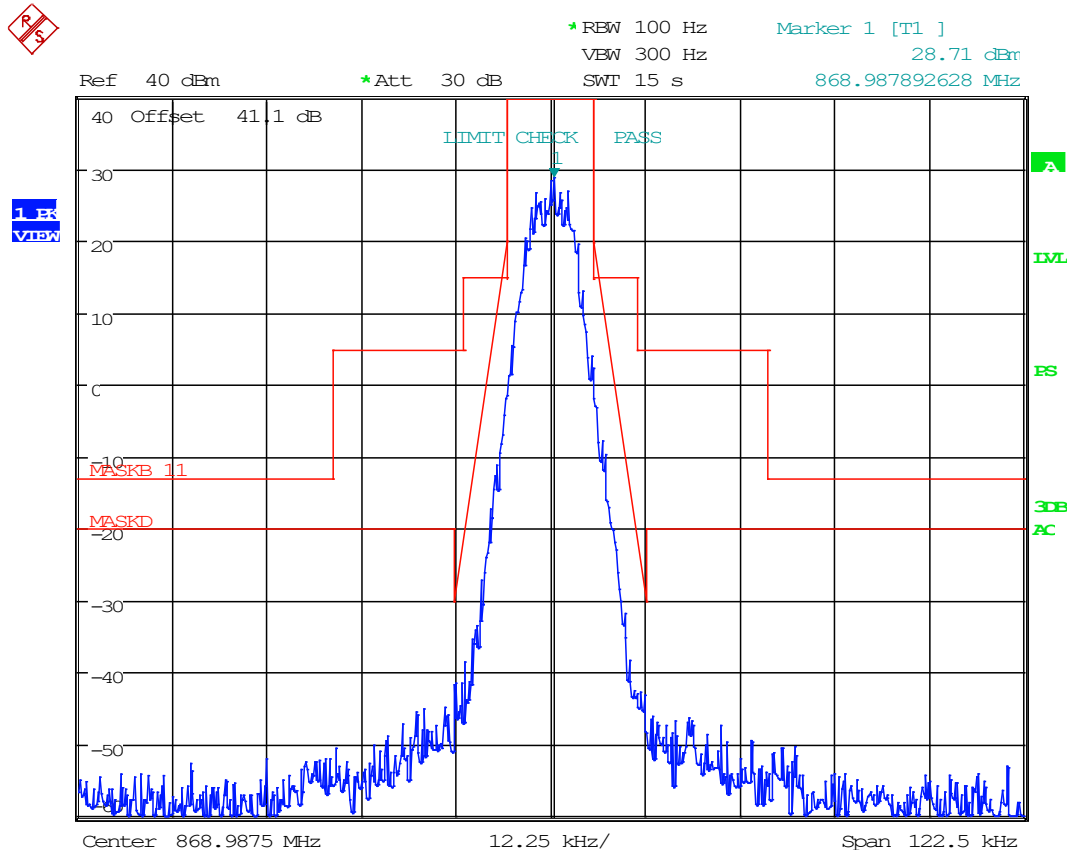
EMISSION MASK & IVO



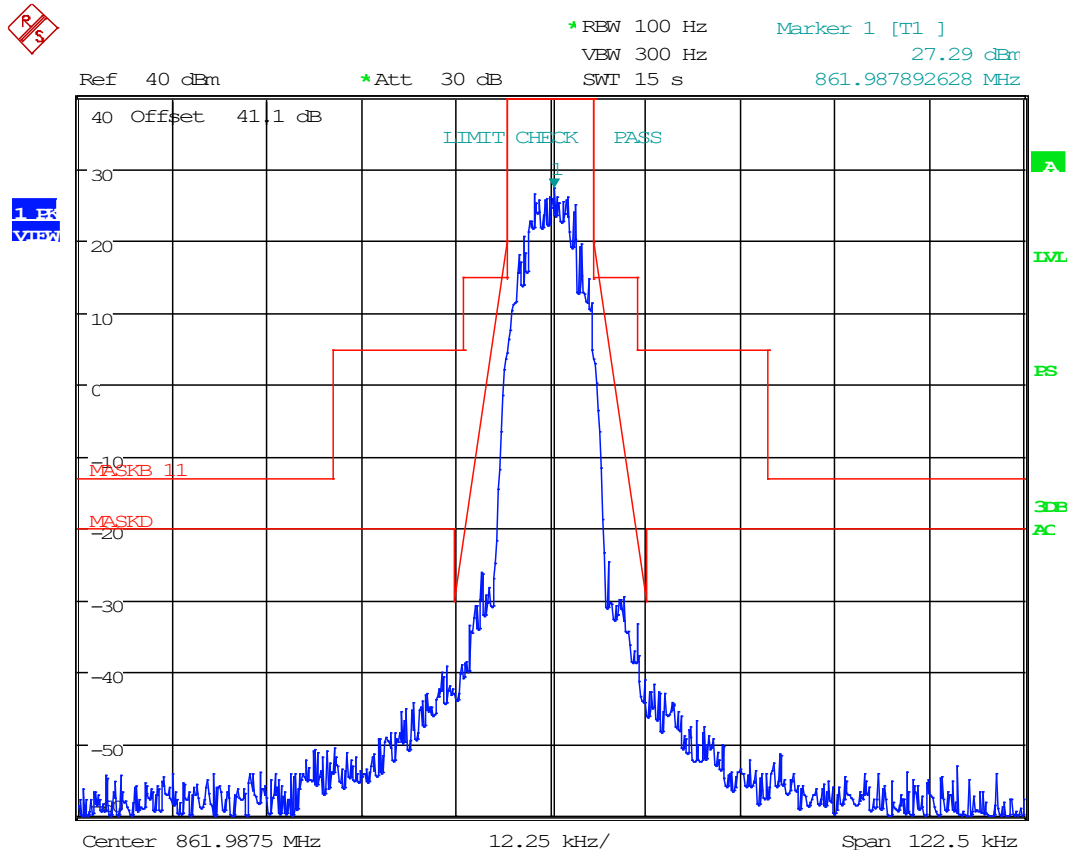
Date: 22.APR.2020 16:51:59

EMISSION MASK & IVO**800 MHz Band, Downlink, H-CPM, AT AGC +3 DB**

Date: 22.APR.2020 16:42:11

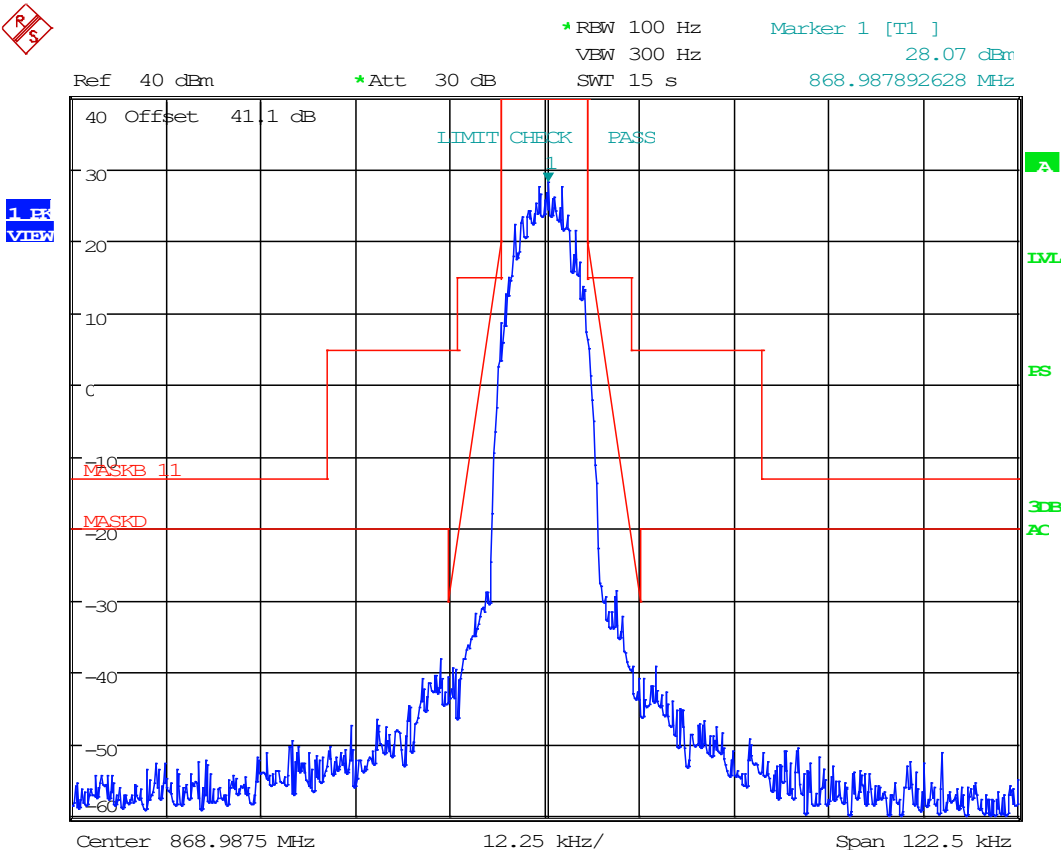
EMISSION MASK & IVO

Date: 22.APR.2020 16:52:43

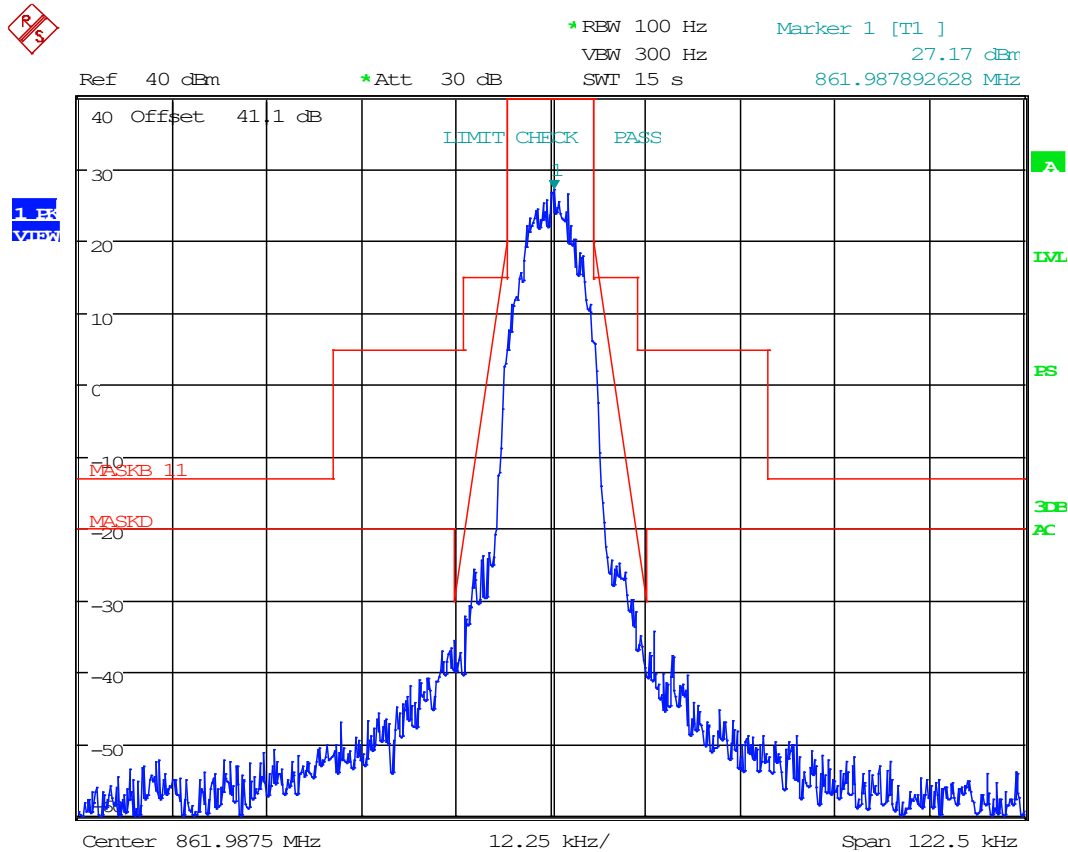
EMISSION MASK & IVO**800 MHz Band, Downlink, H-DQPSK, AT AGC**

Date: 22.APR.2020 16:42:56

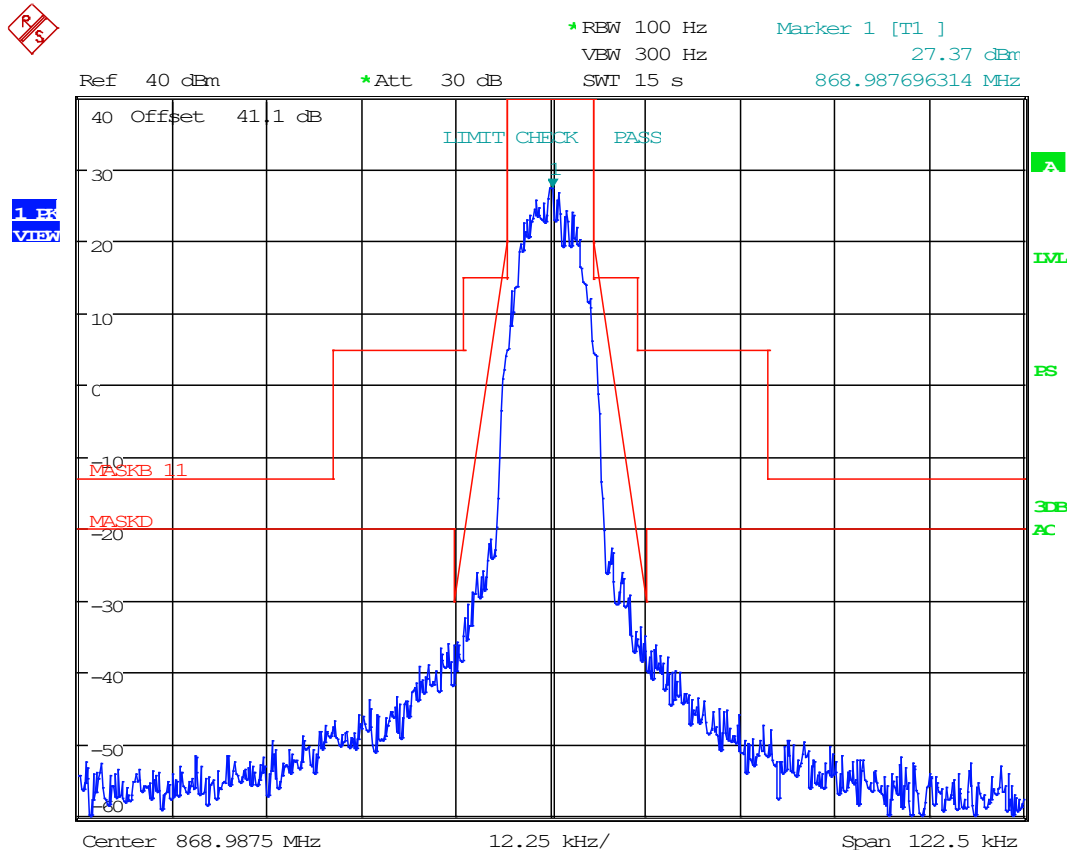
EMISSION MASK & IVO



Date: 22.APR.2020 16:53:44

EMISSION MASK & IVO**800 MHz Band, Downlink, H-DQPSK, AT AGC +3 DB**

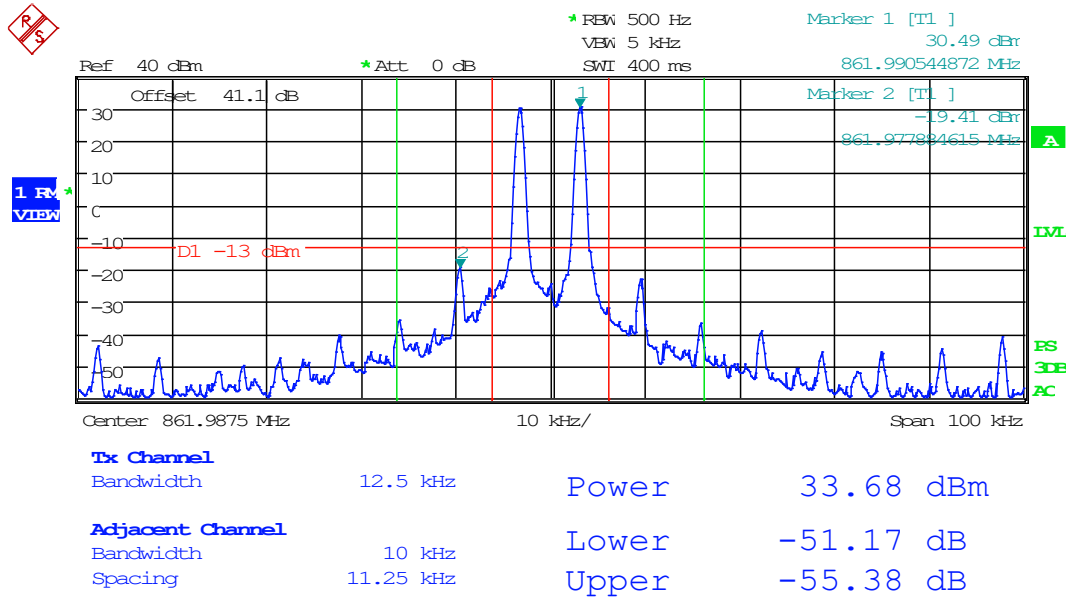
Date: 22.APR.2020 16:43:40

EMISSION MASK & IVO

Date: 22.APR.2020 16:54:42

KDB 935210 4.7.2 INTERMODULATION

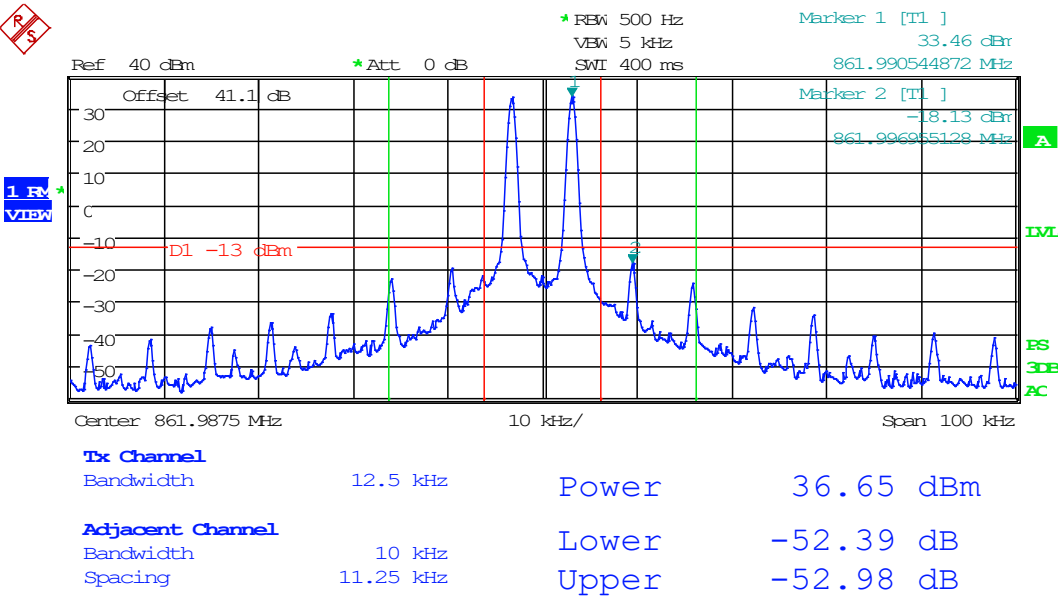
Test Engineer: FR
 Test Date: 4/22/2020

INTERMODULATION**800 MHz Band, Downlink, 6.25k, At AGC**

Date: 22.APR.2020 18:11:38

INTERMODULATION

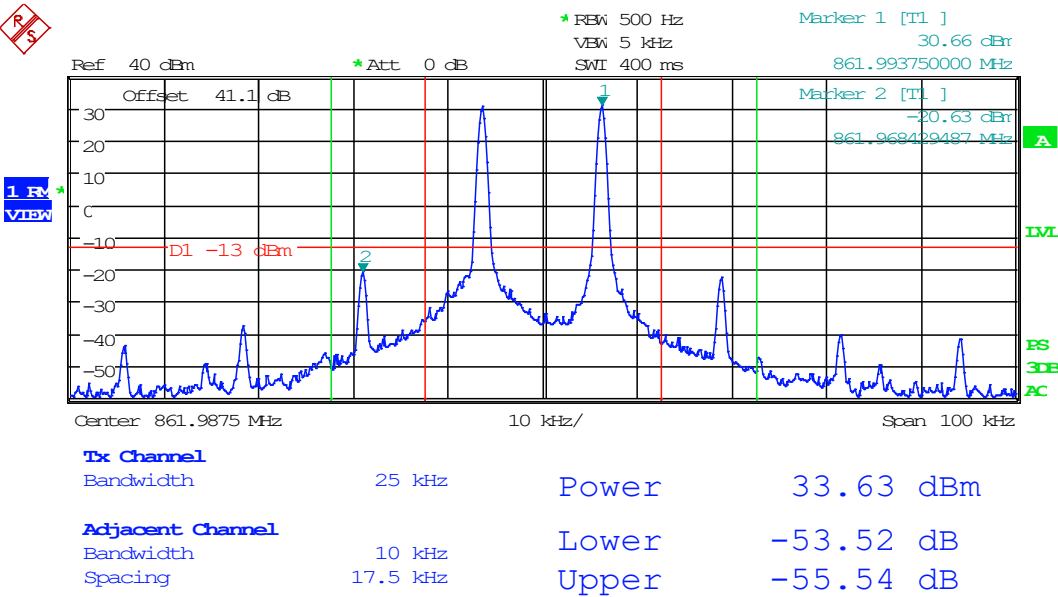
800 MHz Band, Downlink, 6.25k, At AGC +3 dB



Date: 22.APR.2020 18:12:12

INTERMODULATION

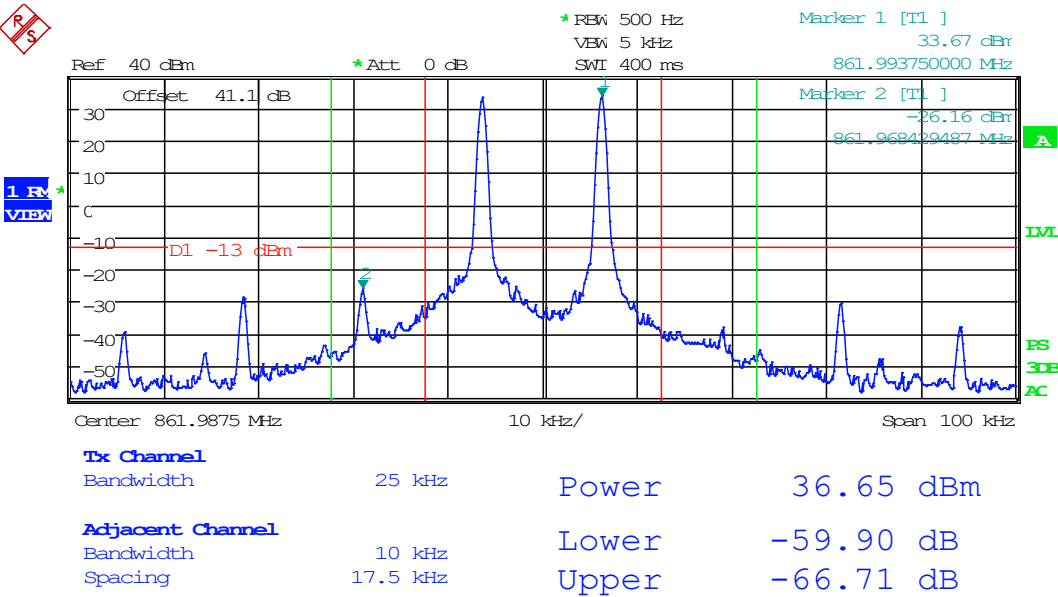
800 MHz Band, Downlink, 12.5k, At AGC



Date: 22.APR.2020 18:08:48

INTERMODULATION

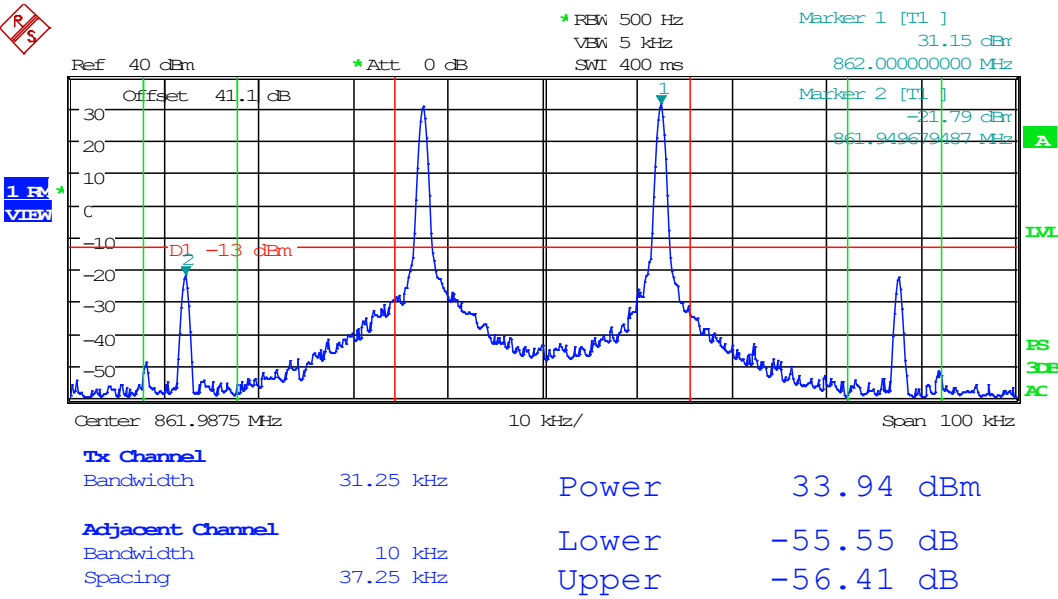
800 MHz Band, Downlink, 12.5k, At AGC +3 dB



Date: 22.APR.2020 18:09:37

INTERMODULATION

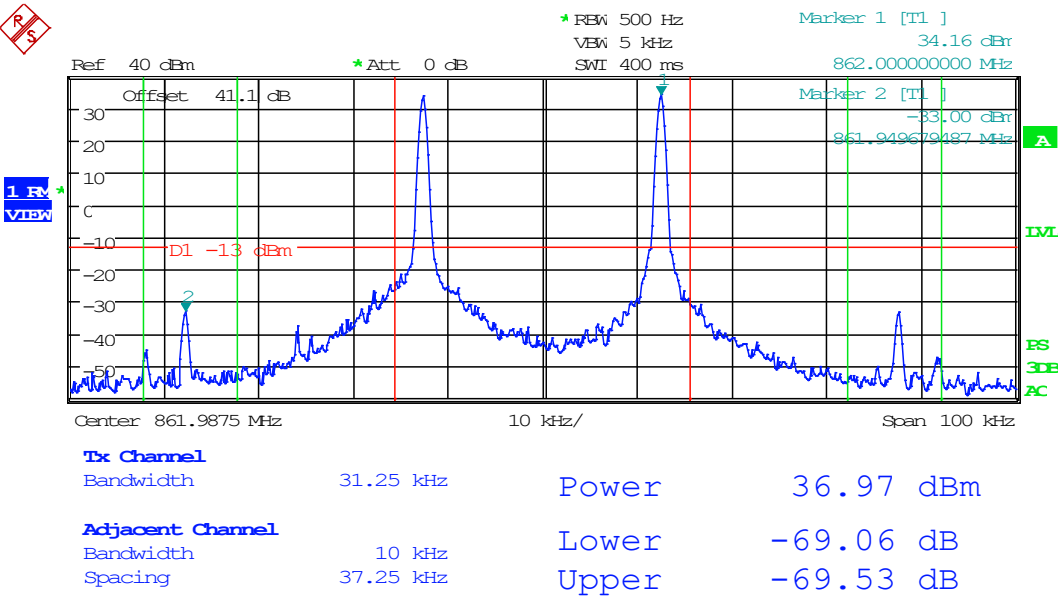
800 MHz Band, Downlink, 25K, At AGC



Date: 22.APR.2020 18:15:19

INTERMODULATION

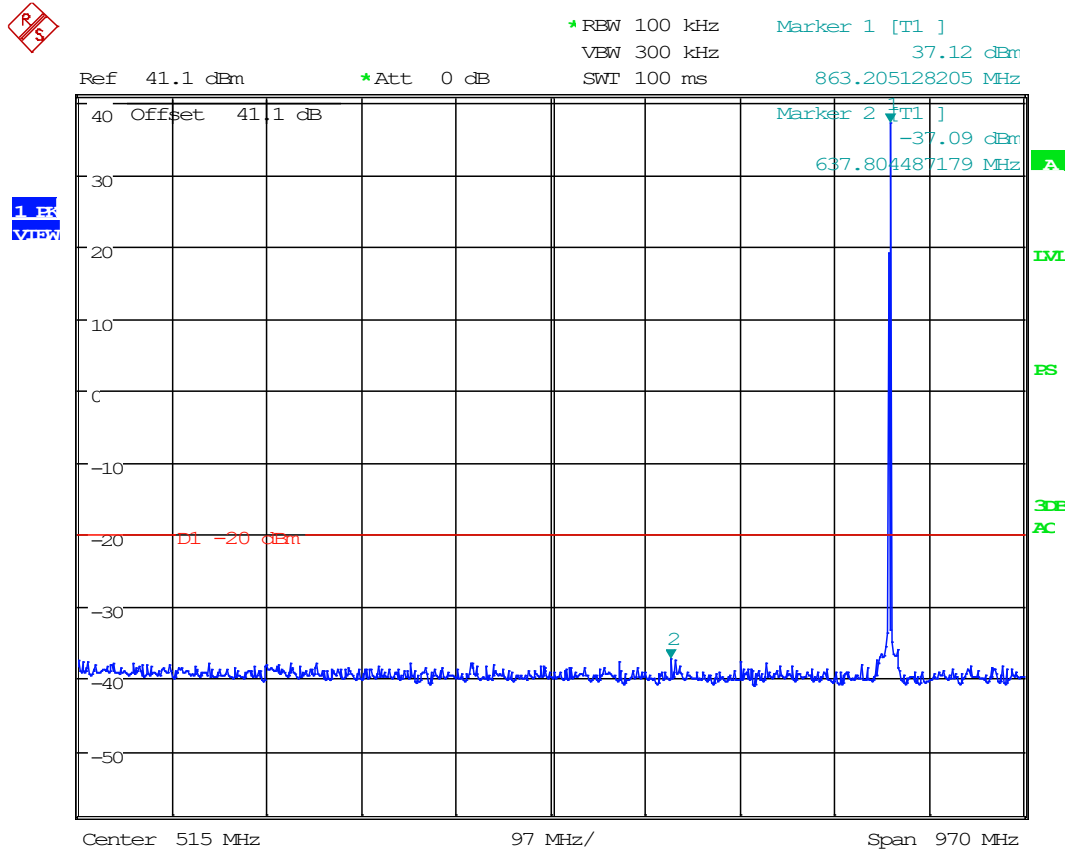
800 MHz Band, Downlink, 25K, At AGC +3 dB



Date: 22.APR.2020 18:15:50

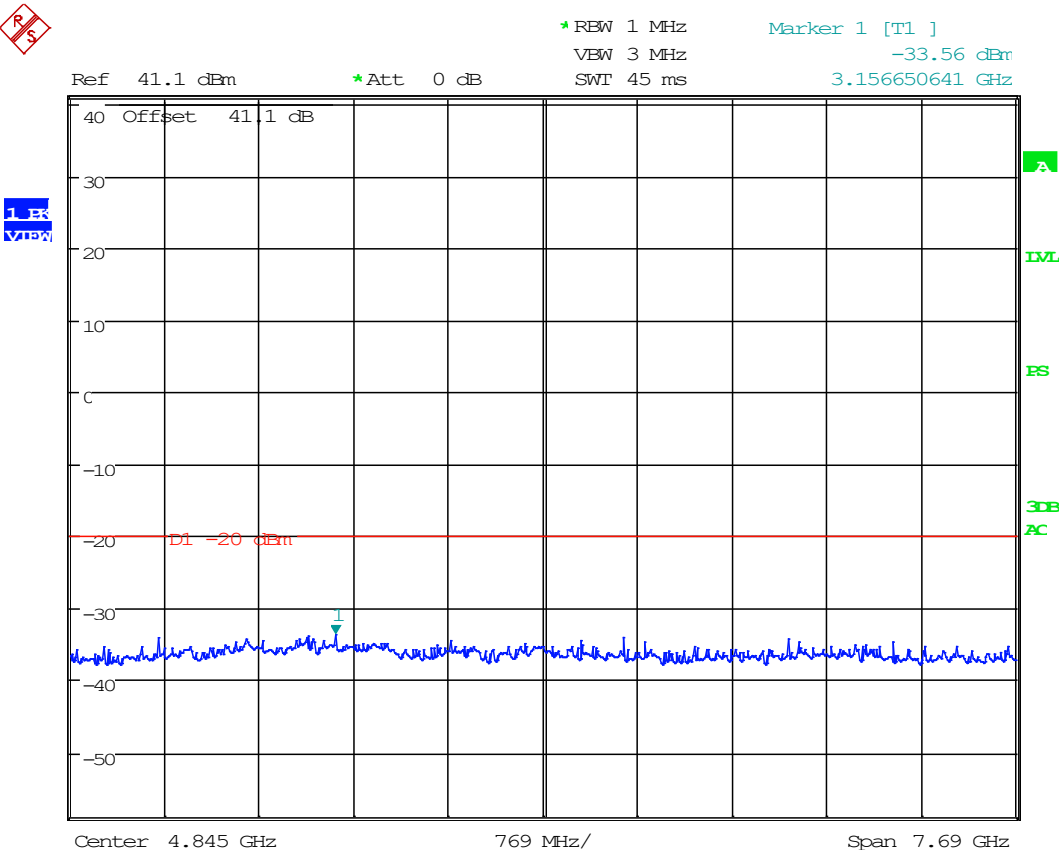
2.1051 CONDUCTED SPURIOUS EMISSIONS**KDB 935210 4.7.3 CONDUCTED SPURIOUS EMISSIONS**

Test Engineer: FR
 Test Date: 4/22/2020

Downlink, Below 1 GHz, Class A

Conducted Spurious Emissions

Downlink, Above 1 GHz, Class A



Date: 22.APR.2020 18:24:37

2.1053 FIELD STRENGTH OF SPURIOUS EMISSIONS**KDB 935210 4.9 FIELD STRENGTH OF SPURIOUS EMISSIONS**

Test Engineer: FR
 Test Date: 4/24/2020

851.0125 MHz, Downlink

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dBm)
851.01	37.36	PK	27.88	H	0.68	13.40	3.00	41.96	-55.42	-20.00	35.42
851.01	185.29	PK	27.65	H	1.58	13.40	3.00	42.63	-54.75	-20.00	34.75
851.01	38.17	PK	38.72	V	0.69	13.38	3.00	52.79	-44.59	-20.00	24.59
851.01	176.30	PK	23.77	V	1.55	14.37	3.00	39.69	-57.69	-20.00	37.69
851.01	225.64	PK	24.48	H	1.72	10.30	3.00	36.50	-60.87	-20.00	40.87
851.01	479.49	PK	26.00	H	2.59	16.91	3.00	45.50	-51.88	-20.00	31.88
851.01	639.74	PK	28.52	H	2.96	19.48	3.00	50.96	-46.41	-20.00	26.41
851.01	960.26	PK	22.84	H	3.64	23.19	3.00	49.67	-47.71	-20.00	27.71
851.01	205.13	PK	28.98	V	1.63	10.69	3.00	41.30	-56.08	-20.00	36.08
851.01	479.49	PK	18.10	V	2.59	16.91	3.00	37.60	-59.78	-20.00	39.78
851.01	639.74	PK	25.09	V	2.96	19.48	3.00	47.53	-49.84	-20.00	29.84
851.01	960.26	PK	19.88	V	3.64	23.19	3.00	46.71	-50.67	-20.00	30.67
851.01	1702.03	PK	4.20	H	4.78	29.10	3.00	38.08	-59.30	-20.00	39.30
851.01	2553.04	PK	3.50	H	5.70	32.60	3.00	41.79	-55.58	-20.00	35.58
851.01	3404.05	PK	4.40	H	6.80	32.65	3.00	43.84	-53.53	-20.00	33.53
851.01	4255.06	PK	1.70	H	7.22	33.35	3.00	42.27	-55.11	-20.00	35.11
851.01	5106.08	PK	2.00	H	7.90	34.09	3.00	44.00	-53.38	-20.00	33.38
851.01	5957.09	PK	1.30	H	8.54	35.05	3.00	44.90	-52.48	-20.00	32.48
851.01	6808.10	PK	1.10	H	9.23	35.86	3.00	46.19	-51.19	-20.00	31.19
851.01	7659.11	PK	0.70	H	10.06	35.93	3.00	46.69	-50.69	-20.00	30.69
851.01	8510.13	PK	-0.30	H	10.28	35.94	3.00	45.92	-51.46	-20.00	31.46
851.01	8510.13	PK	0.40	V	10.28	35.94	3.00	46.62	-50.76	-20.00	30.76
851.01	7659.11	PK	0.80	V	10.06	35.93	3.00	46.79	-50.59	-20.00	30.59
851.01	6808.10	PK	1.30	V	9.23	35.86	3.00	46.39	-50.99	-20.00	30.99
851.01	5957.09	PK	1.70	V	8.54	35.05	3.00	45.30	-52.08	-20.00	32.08
851.01	5106.08	PK	1.50	V	7.90	34.09	3.00	43.50	-53.88	-20.00	33.88
851.01	4255.06	PK	1.10	V	7.22	33.35	3.00	41.67	-55.71	-20.00	35.71
851.01	3404.05	PK	4.60	V	6.80	32.65	3.00	44.04	-53.33	-20.00	33.33
851.01	2553.04	PK	3.80	V	5.70	32.60	3.00	42.09	-55.28	-20.00	35.28
851.01	1702.03	PK	3.00	V	4.78	29.10	3.00	36.88	-60.50	-20.00	40.50

FIELD STRENGTH OF SPURIOUS EMISSIONS**861.9875 MHz, Downlink**

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dBm)
861.99	38.17	PK	38.98	H	0.69	13.38	3.00	53.05	-44.33	-20.00	24.33
861.99	175.75	PK	23.49	H	1.54	14.45	3.00	39.48	-57.89	-20.00	37.89
861.99	185.56	PK	25.93	V	1.58	13.40	3.00	40.91	-56.47	-20.00	36.47
861.99	37.36	PK	28.35	V	0.68	13.40	3.00	42.43	-54.95	-20.00	34.95
861.99	216.67	PK	29.16	H	1.68	10.37	3.00	41.20	-56.17	-20.00	36.17
861.99	479.49	PK	21.17	H	2.59	16.91	3.00	40.67	-56.71	-20.00	36.71
861.99	639.74	PK	24.52	H	2.96	19.48	3.00	46.96	-50.41	-20.00	30.41
861.99	960.26	PK	19.22	H	3.64	23.19	3.00	46.05	-51.33	-20.00	31.33
861.99	319.23	PK	26.33	V	2.09	14.01	3.00	42.43	-54.95	-20.00	34.95
861.99	479.49	PK	26.58	V	2.59	16.91	3.00	46.08	-51.30	-20.00	31.30
861.99	639.74	PK	28.75	V	2.96	19.48	3.00	51.19	-46.18	-20.00	26.18
861.99	960.26	PK	22.03	V	3.64	23.19	3.00	48.86	-48.52	-20.00	28.52
861.99	1723.98	PK	2.90	H	4.81	29.38	3.00	37.10	-60.28	-20.00	40.28
861.99	2585.96	PK	3.10	H	5.76	32.46	3.00	41.32	-56.05	-20.00	36.05
861.99	3447.95	PK	4.50	H	6.88	32.60	3.00	43.98	-53.40	-20.00	33.40
861.99	4309.94	PK	1.40	H	7.54	33.48	3.00	42.42	-54.96	-20.00	34.96
861.99	5171.93	PK	2.00	H	7.88	34.13	3.00	44.01	-53.37	-20.00	33.37
861.99	6033.91	PK	1.00	H	8.66	35.16	3.00	44.82	-52.56	-20.00	32.56
861.99	6895.90	PK	2.50	H	9.22	35.93	3.00	47.65	-49.73	-20.00	29.73
861.99	7757.89	PK	0.70	H	10.12	35.87	3.00	46.69	-50.69	-20.00	30.69
861.99	8619.88	PK	-0.40	H	10.17	36.03	3.00	45.80	-51.58	-20.00	31.58
861.99	8619.88	PK	0.30	V	10.17	36.03	3.00	46.50	-50.88	-20.00	30.88
861.99	7757.89	PK	0.70	V	10.12	35.87	3.00	46.69	-50.69	-20.00	30.69
861.99	6895.90	PK	1.90	V	9.22	35.93	3.00	47.05	-50.33	-20.00	30.33
861.99	6033.91	PK	1.80	V	8.66	35.16	3.00	45.62	-51.76	-20.00	31.76
861.99	5171.93	PK	2.30	V	7.88	34.13	3.00	44.31	-53.07	-20.00	33.07
861.99	4309.94	PK	2.30	V	7.54	33.48	3.00	43.32	-54.06	-20.00	34.06
861.99	3447.95	PK	4.70	V	6.88	32.60	3.00	44.18	-53.20	-20.00	33.20
861.99	2585.96	PK	3.70	V	5.76	32.46	3.00	41.92	-55.45	-20.00	35.45
861.99	1723.98	PK	4.20	V	4.81	29.38	3.00	38.40	-58.98	-20.00	38.98

FIELD STRENGTH OF SPURIOUS EMISSIONS**868.9875 MHz, Downlink**

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBm)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dBm)
868.99	110.37	PK	24.87	H	1.20	10.16	3.00	36.23	-61.14	-20.00	41.14
868.99	38.17	PK	37.46	H	0.69	13.38	3.00	51.53	-45.85	-20.00	25.85
868.99	37.35	PK	26.55	V	0.68	13.40	3.00	40.63	-56.75	-20.00	36.75
868.99	185.29	PK	26.34	V	1.58	13.40	3.00	41.32	-56.06	-20.00	36.06
868.99	960.26	PK	22.46	H	3.64	23.19	3.00	49.29	-48.09	-20.00	28.09
868.99	639.74	PK	25.79	H	2.96	19.48	3.00	48.23	-49.14	-20.00	29.14
868.99	479.49	PK	20.09	H	2.59	16.91	3.00	39.59	-57.79	-20.00	37.79
868.99	960.26	PK	23.56	V	3.64	23.19	3.00	50.39	-46.99	-20.00	26.99
868.99	639.74	PK	28.43	V	2.96	19.48	3.00	50.87	-46.50	-20.00	26.50
868.99	479.49	PK	28.60	V	2.59	16.91	3.00	48.10	-49.28	-20.00	29.28
868.99	1737.98	PK	3.30	H	4.83	29.57	3.00	37.70	-59.68	-20.00	39.68
868.99	2606.96	PK	3.60	H	5.81	32.41	3.00	41.81	-55.56	-20.00	35.56
868.99	3475.95	PK	4.20	H	6.90	32.65	3.00	43.75	-53.63	-20.00	33.63
868.99	4344.94	PK	2.10	H	7.43	33.56	3.00	43.09	-54.29	-20.00	34.29
868.99	5213.93	PK	1.20	H	7.83	34.21	3.00	43.24	-54.13	-20.00	34.13
868.99	6082.91	PK	1.50	H	8.63	35.21	3.00	45.35	-52.03	-20.00	32.03
868.99	6951.90	PK	1.40	H	9.22	36.12	3.00	46.74	-50.64	-20.00	30.64
868.99	7820.89	PK	0.60	H	10.13	35.86	3.00	46.59	-50.79	-20.00	30.79
868.99	8689.88	PK	0.70	H	10.56	35.98	3.00	47.23	-50.14	-20.00	30.14
868.99	8689.88	PK	0.20	V	10.56	35.98	3.00	46.73	-50.64	-20.00	30.64
868.99	7820.89	PK	0.90	V	10.13	35.86	3.00	46.89	-50.49	-20.00	30.49
868.99	6951.90	PK	1.10	V	9.22	36.12	3.00	46.44	-50.94	-20.00	30.94
868.99	6082.91	PK	1.60	V	8.63	35.21	3.00	45.45	-51.93	-20.00	31.93
868.99	5213.93	PK	1.70	V	7.83	34.21	3.00	43.74	-53.63	-20.00	33.63
868.99	4344.94	PK	1.60	V	7.43	33.56	3.00	42.59	-54.79	-20.00	34.79
868.99	3475.95	PK	4.60	V	6.90	32.65	3.00	44.15	-53.23	-20.00	33.23
868.99	2606.96	PK	3.30	V	5.81	32.41	3.00	41.51	-55.86	-20.00	35.86
868.99	1737.98	PK	3.10	V	4.83	29.57	3.00	37.50	-59.88	-20.00	39.88

2.1055 FREQUENCY STABILITY

KDB 935210 4.8 FREQUENCY STABILITY

90.213 FREQUENCY STABILITY

22.355 FREQUENCY TOLERANCE

Test Engineer: _____
Test Date: _____

N/A. Device does not use a frequency determining element and is exempt.

N/A. There is no Transient Frequency Response compliance requirement for devices which operate in the 700 and 800 MHz bands.

END OF TEST REPORT