



BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

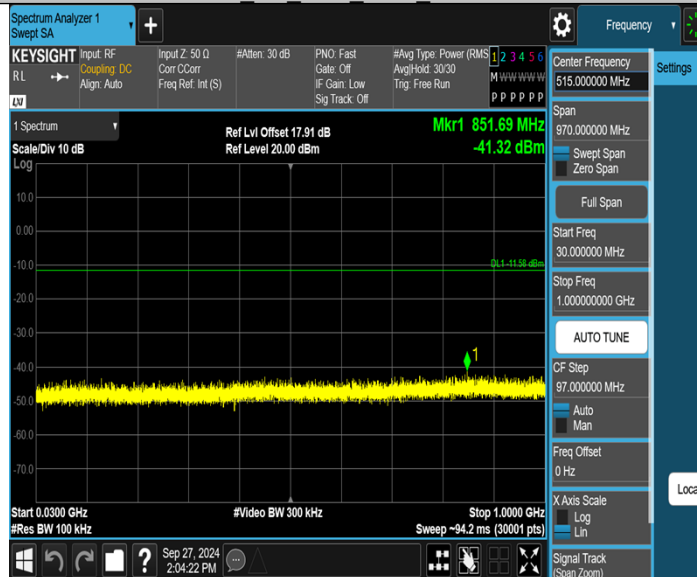


BLE_1M_Ant1_2480_1000~26500

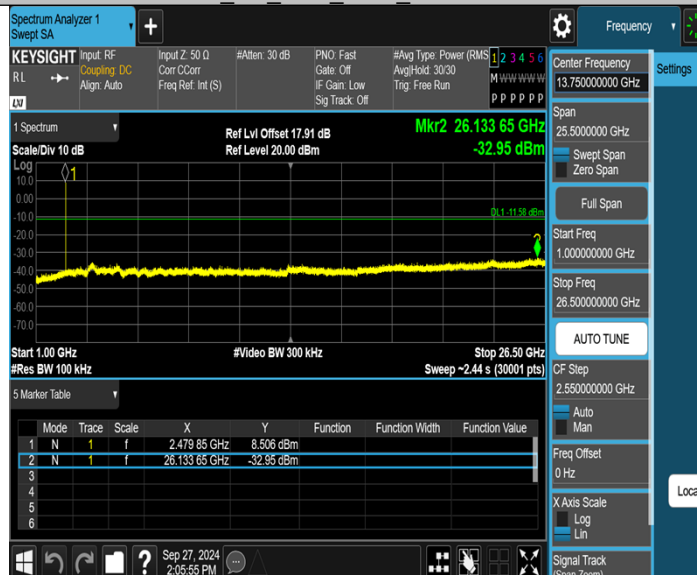

BLE 2M Ant1 2404 0~Reference






BLE 2M Ant1 2404 30~1000

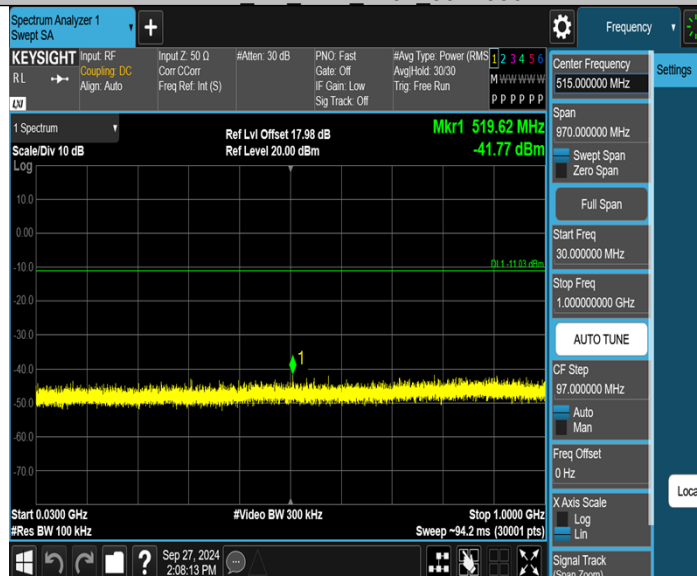

BLE 2M Ant1 2404 1000~26500






Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1 N	1	f	2.439 90 GHz	9.346 dBm			
2 N	1	f	26.249 25 GHz	-32.87 dBm			
3							
4							
5							
6							


BLE 2M Ant1 2478 0~Reference



BLE 2M Ant1 2478 30~1000

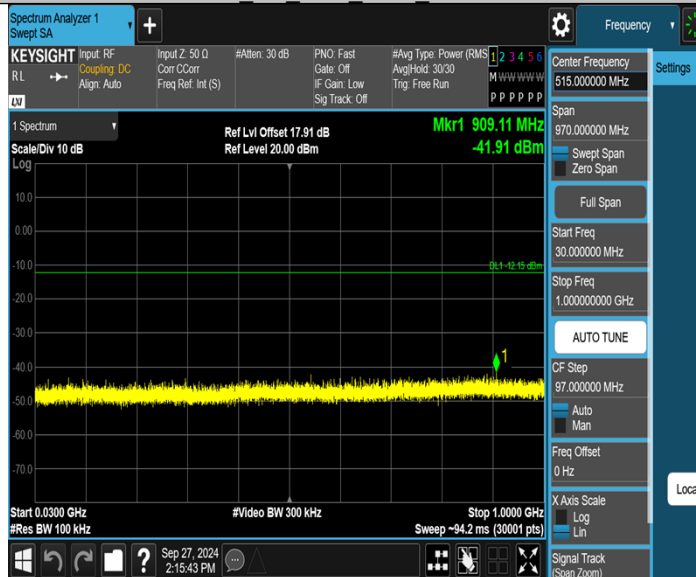

BLE 2M Ant1 2478 1000~26500

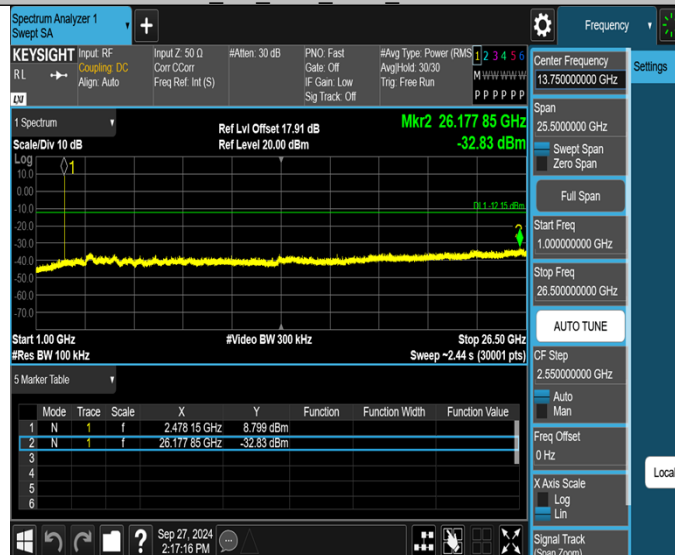

Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz (Left earbud)

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

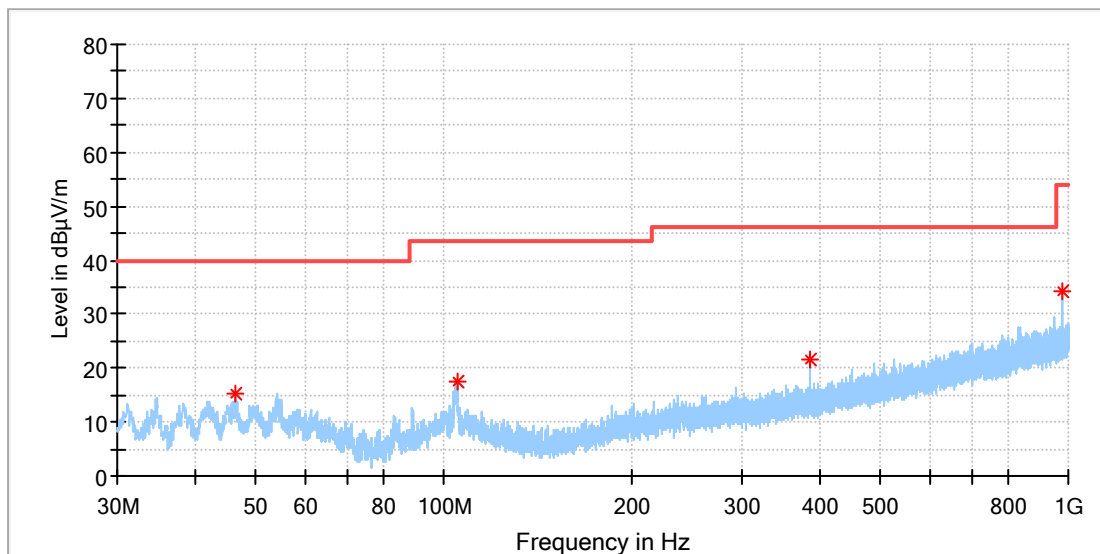

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.340769	15.34	40.00	24.66	100.0	H	127.0	-18.7
105.175000	17.40	43.50	26.10	100.0	H	29.0	-18.9
386.101923	21.47	46.00	24.53	100.0	H	265.0	-14.1
980.077692	34.30	54.00	19.70	100.0	H	20.0	-3.8

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

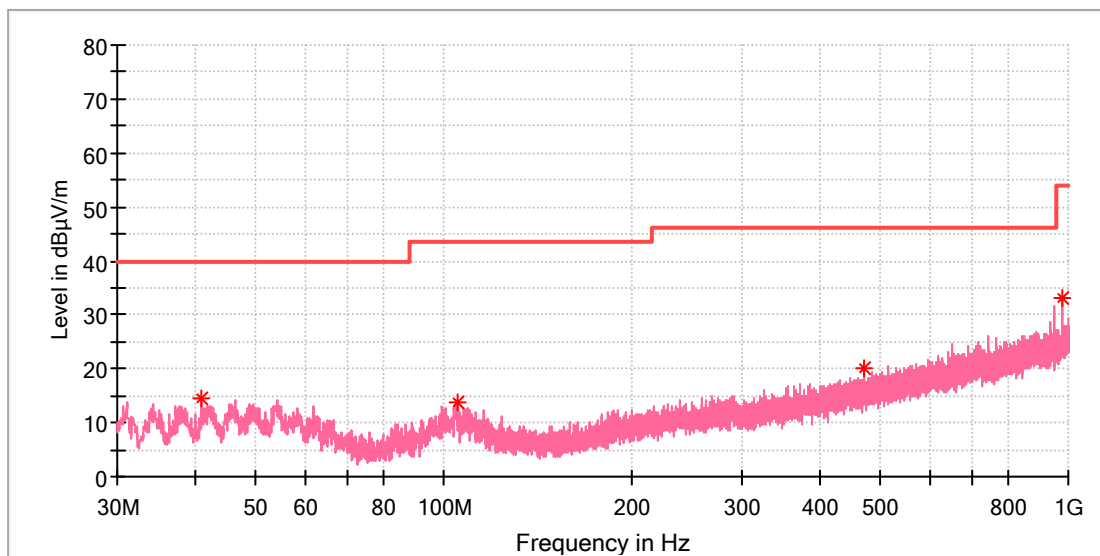

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.968462	14.42	40.00	25.58	100.0	V	115.0	-19.9
105.025769	13.94	43.50	29.56	100.0	V	178.0	-18.9
471.611154	19.93	46.00	26.07	100.0	V	143.0	-12.3
980.077692	33.12	54.00	20.88	100.0	V	292.0	-3.8


Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

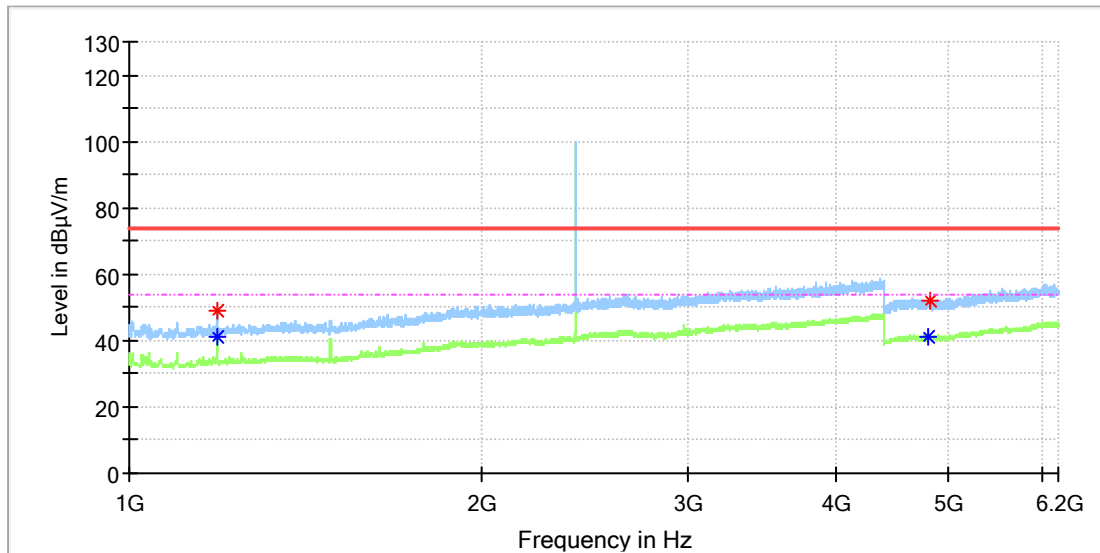

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1188.000000	48.69	---	74.00	25.31	150.0	H	18.0	1.7
1188.000000	---	40.98	54.00	13.02	150.0	H	18.0	1.7
4809.000000	---	41.16	54.00	12.84	150.0	H	279.0	13.3
4812.000000	51.72	---	74.00	22.28	150.0	H	120.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

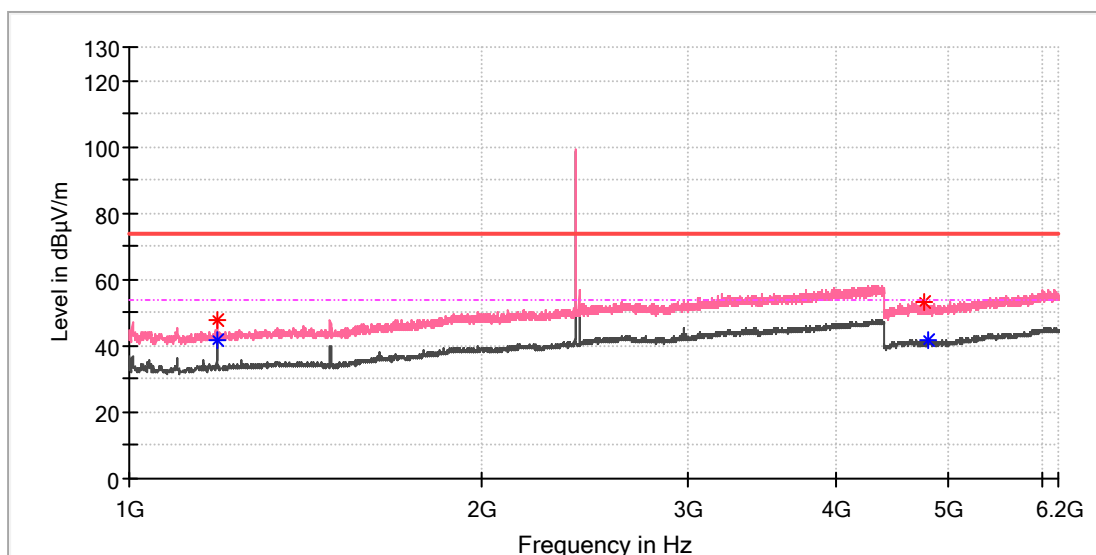

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1188.000000	47.54	---	74.00	26.46	150.0	V	20.0	1.7
1188.000000	---	41.46	54.00	12.54	150.0	V	20.0	1.7
4760.500000	53.13	---	74.00	20.87	150.0	V	245.0	13.3
4800.500000	---	41.46	54.00	12.54	150.0	V	44.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

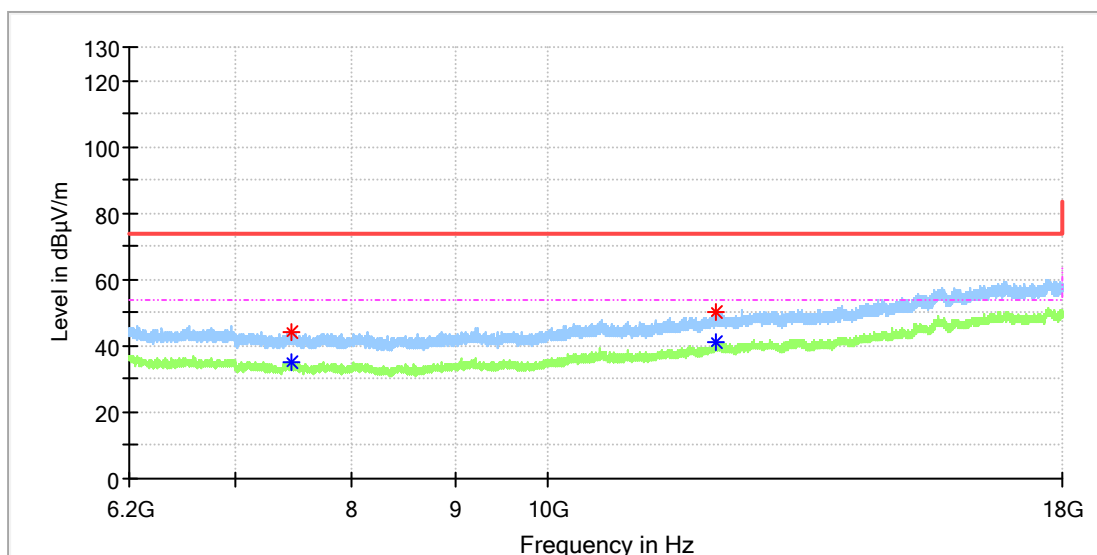

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7461.616667	---	34.80	54.00	19.20	150.0	H	268.0	8.5
7466.533333	44.19	---	74.00	29.81	150.0	H	280.0	8.6
12116.225000	50.00	---	74.00	24.00	150.0	H	196.0	14.2
12120.650000	---	40.82	54.00	13.18	150.0	H	233.0	14.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

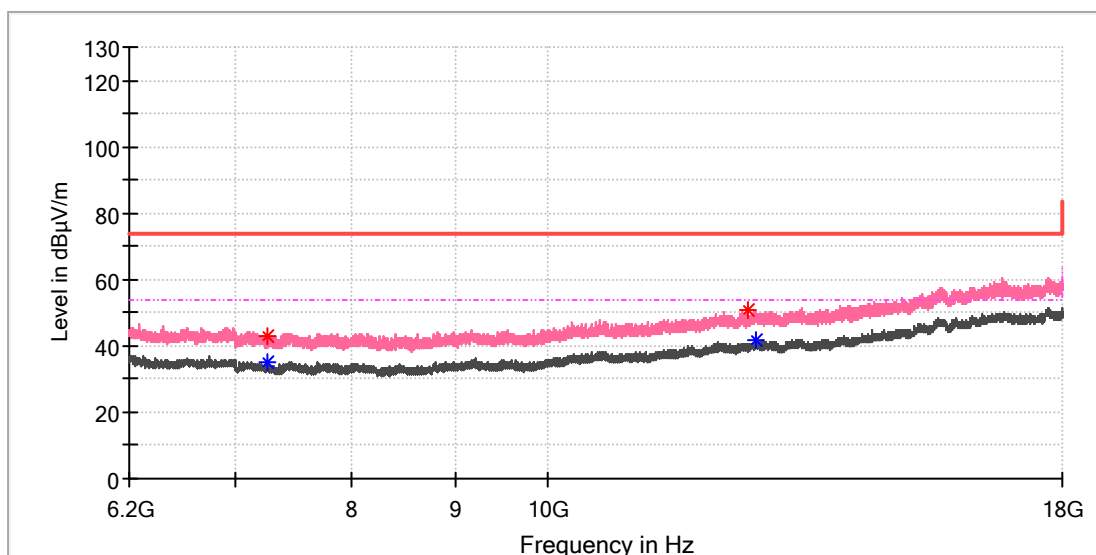

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7251.675000	---	34.81	54.00	19.19	150.0	V	50.0	8.5
7255.116667	43.04	---	74.00	30.96	150.0	V	125.0	8.5
12565.116667	50.53	---	74.00	23.47	150.0	V	38.0	14.7
12682.133333	---	41.51	54.00	12.49	150.0	V	125.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

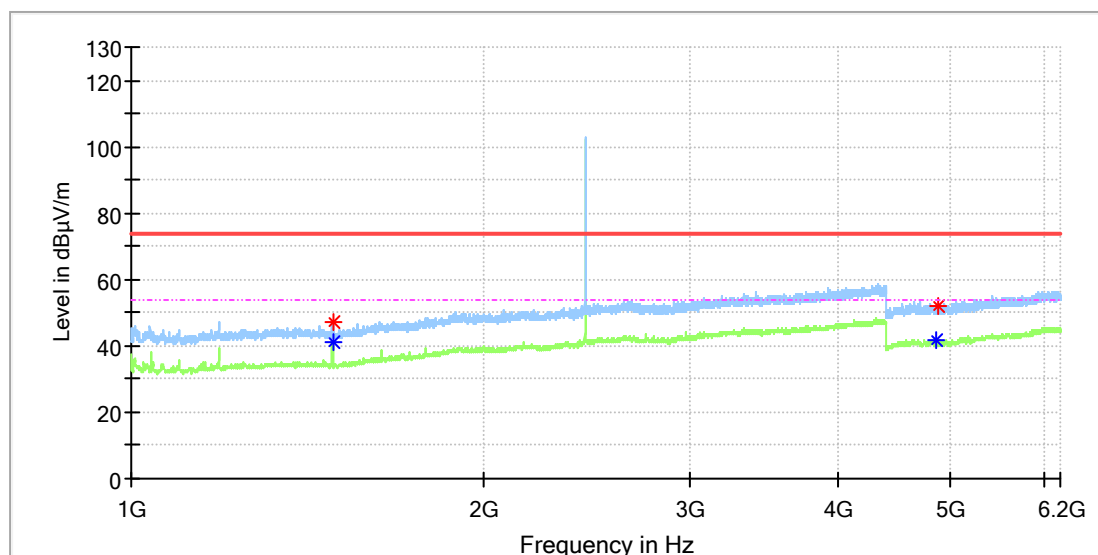

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1485.000000	46.86	---	74.00	27.14	150.0	H	100.0	2.5
1485.000000	---	41.15	54.00	12.85	150.0	H	100.0	2.5
4851.500000	---	41.42	54.00	12.58	150.0	H	337.0	13.3
4874.500000	52.07	---	74.00	21.93	150.0	H	348.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

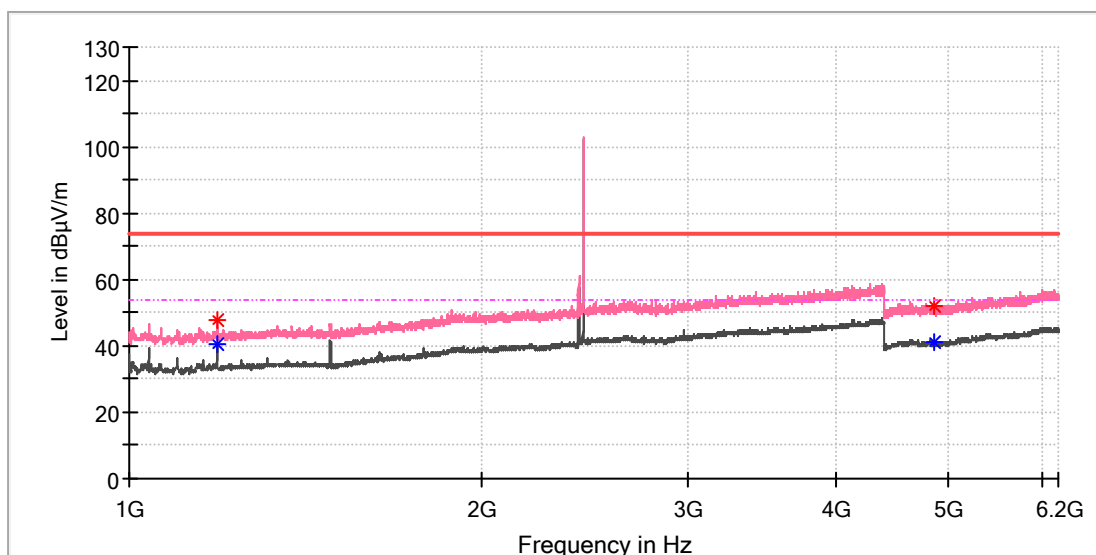

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.500000	47.93	---	74.00	26.07	150.0	V	0.0	1.7
1188.000000	---	40.25	54.00	13.75	150.0	V	0.0	1.7
4862.500000	52.04	---	74.00	21.96	150.0	V	188.0	13.3
4865.000000	---	41.15	54.00	12.85	150.0	V	295.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

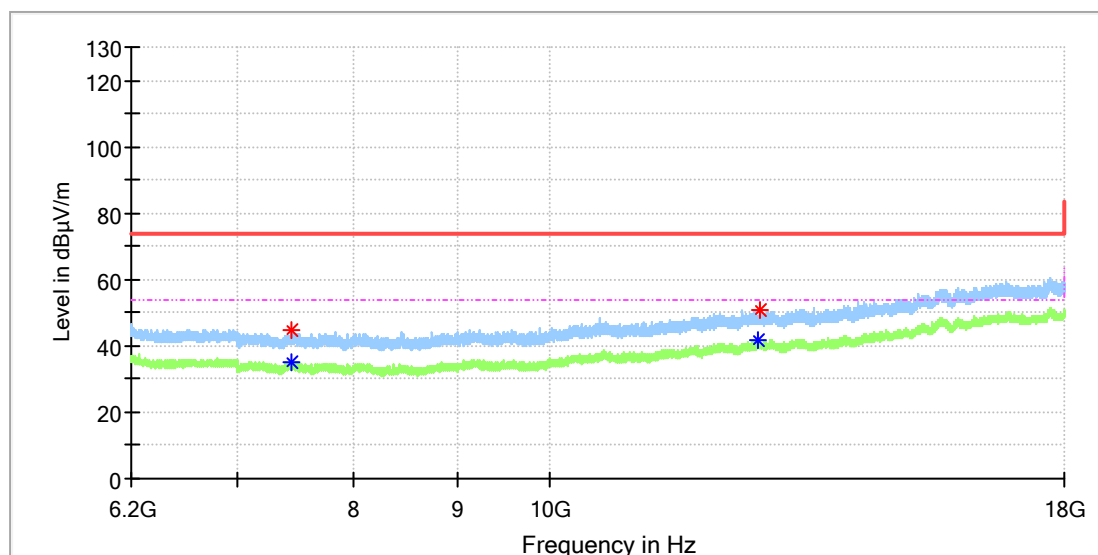

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7443.916667	44.59	---	74.00	29.41	150.0	H	315.0	8.5
7447.358333	---	34.97	54.00	19.03	150.0	H	226.0	8.5
12699.341667	---	41.60	54.00	12.40	150.0	H	201.0	15.1
12710.158333	50.58	---	74.00	23.42	150.0	H	9.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

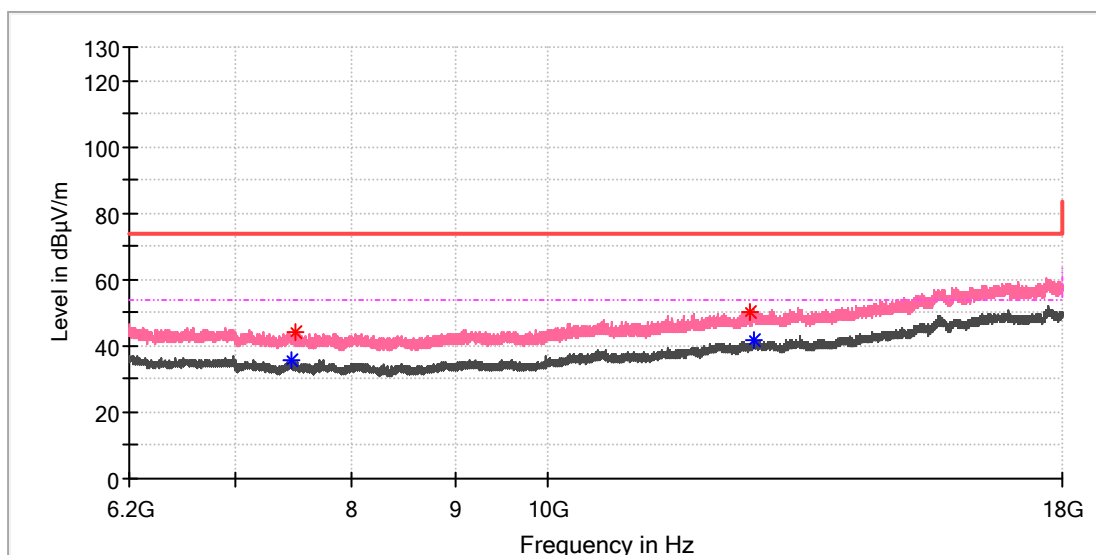

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7458.666667	---	35.52	54.00	18.48	150.0	V	229.0	8.5
7491.116667	43.89	---	74.00	30.11	150.0	V	313.0	8.7
12612.316667	50.18	---	74.00	23.82	150.0	V	229.0	14.9
12662.466667	---	41.72	54.00	12.28	150.0	V	289.0	15.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_High channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

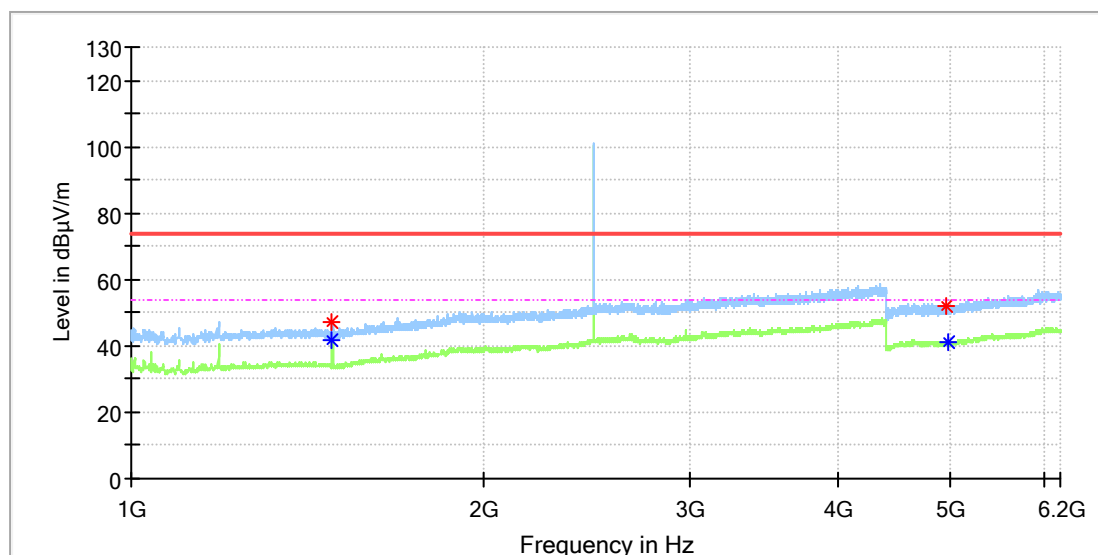

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1484.500000	47.35	---	74.00	26.65	150.0	H	247.0	2.5
1484.500000	---	41.71	54.00	12.29	150.0	H	247.0	2.5
4953.000000	52.23	---	74.00	21.77	150.0	H	198.0	13.3
4966.000000	---	41.36	54.00	12.64	150.0	H	269.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

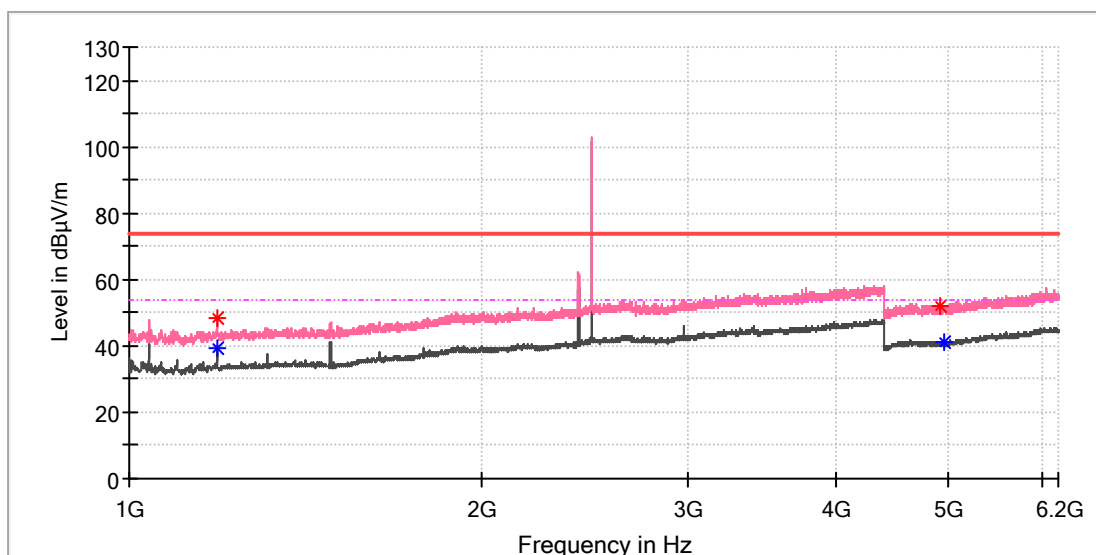

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.500000	48.32	---	74.00	25.68	150.0	V	338.0	1.7
1187.500000	---	39.51	54.00	14.49	150.0	V	338.0	1.7
4912.000000	52.15	---	74.00	21.85	150.0	V	306.0	13.3
4960.000000	---	41.39	54.00	12.61	150.0	V	269.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_High channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

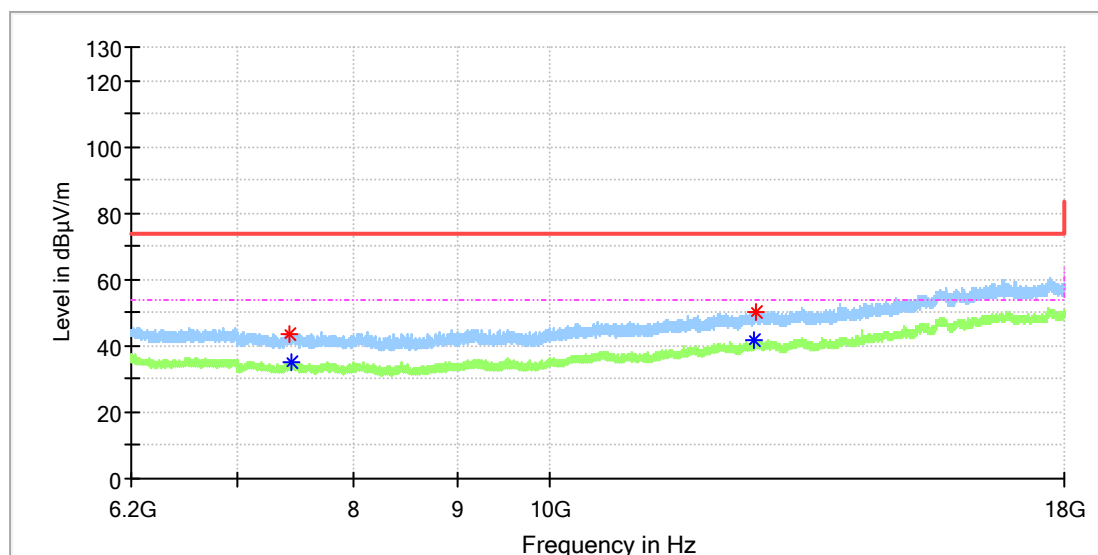

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7420.808333	43.77	---	74.00	30.23	150.0	H	147.0	8.4
7450.308333	---	35.12	54.00	18.88	150.0	H	242.0	8.5
12637.391667	---	41.90	54.00	12.10	150.0	H	315.0	15.0
12667.875000	50.40	---	74.00	23.60	150.0	H	279.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_High channel
Order No/Sample No: 168505519/A003825629-018
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

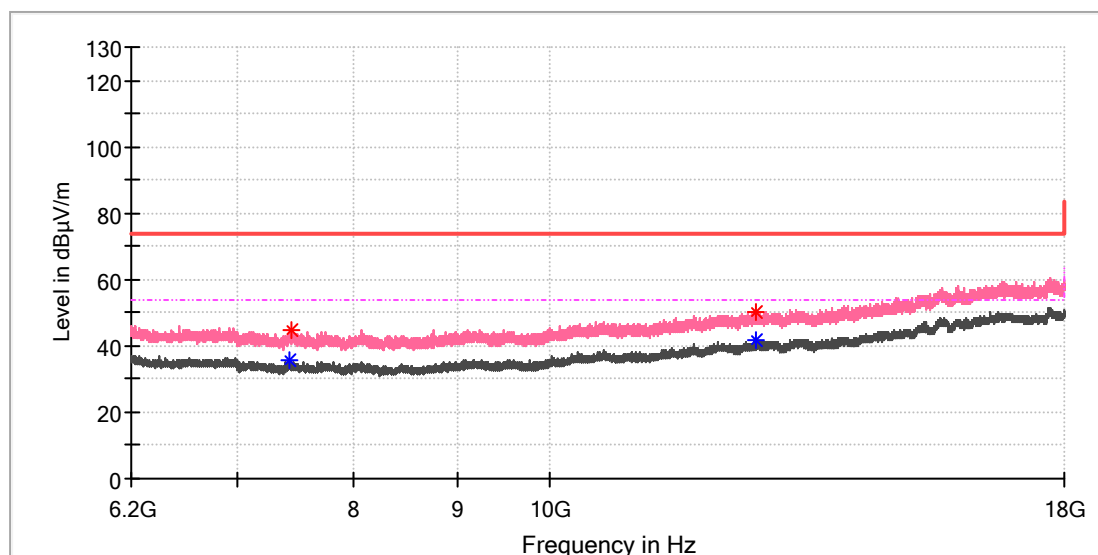

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7435.066667	---	35.56	54.00	18.44	150.0	V	3.0	8.4
7442.933333	45.03	---	74.00	28.97	150.0	V	74.0	8.4
12647.225000	50.24	---	74.00	23.76	150.0	V	49.0	15.0
12654.108333	---	41.60	54.00	12.40	150.0	V	289.0	15.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-019
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

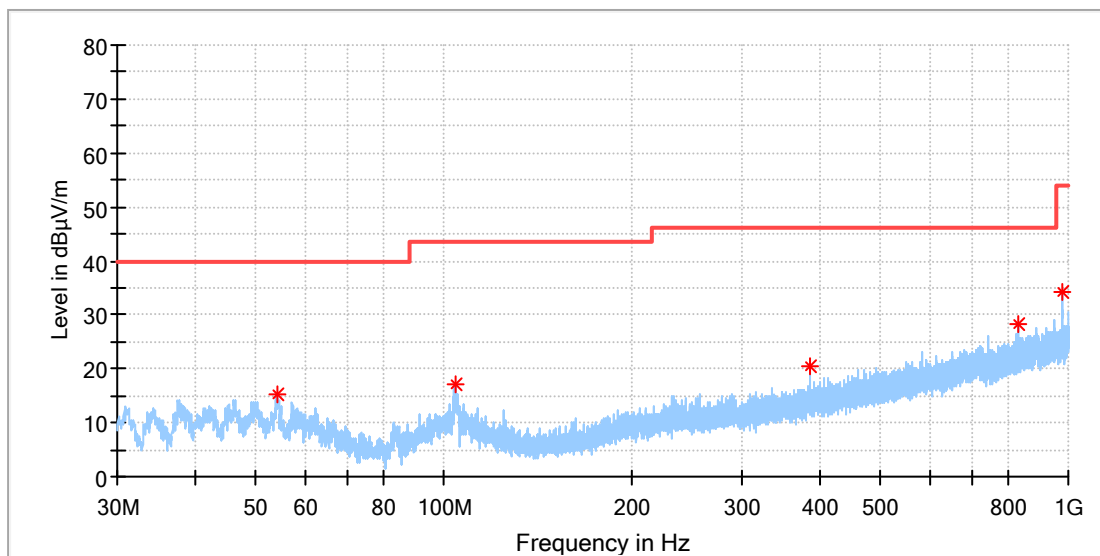

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.951539	15.16	40.00	24.84	100.0	H	14.0	-18.5
104.690000	16.98	43.50	26.52	100.0	H	238.0	-18.9
386.101923	20.41	46.00	25.59	100.0	H	340.0	-14.1
831.593077	28.34	46.00	17.66	100.0	H	143.0	-5.6
980.077692	34.11	54.00	19.89	100.0	H	34.0	-3.8

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

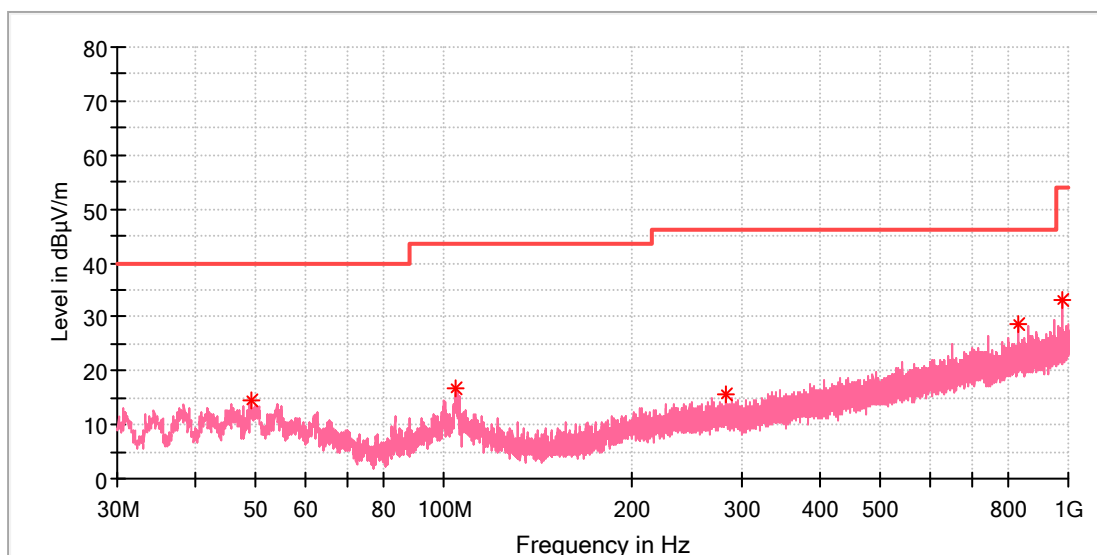

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.064231	14.44	40.00	25.56	100.0	V	272.0	-18.4
104.727308	16.70	43.50	26.80	100.0	V	41.0	-18.9
282.088077	15.54	46.00	30.46	100.0	V	120.0	-16.7
831.593077	28.76	46.00	17.24	100.0	V	359.0	-5.6
980.077692	33.21	54.00	20.79	100.0	V	247.0	-3.8

Final_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz (Right earbud)

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

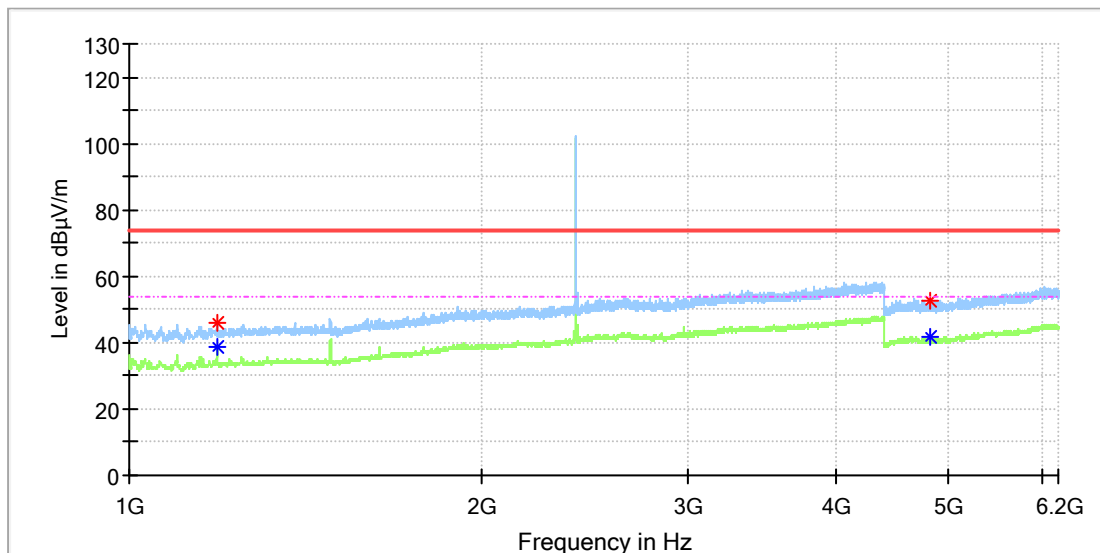

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.500000	46.03	---	74.00	27.97	150.0	H	181.0	1.7
1188.000000	---	38.66	54.00	15.34	150.0	H	346.0	1.7
4812.000000	52.47	---	74.00	21.53	150.0	H	207.0	13.3
4813.000000	---	41.83	54.00	12.17	150.0	H	234.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168505519/A003825629-019
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

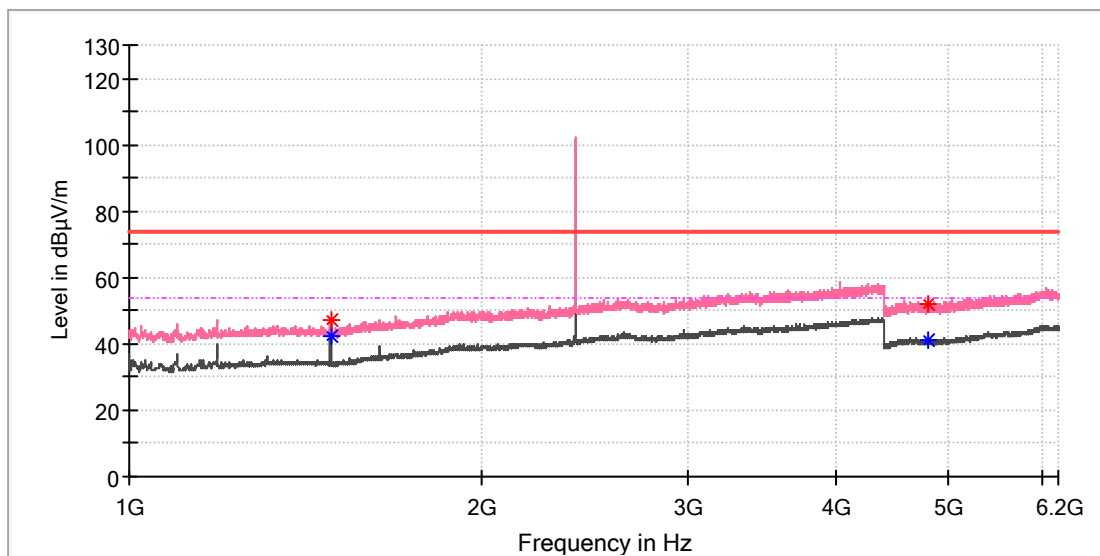

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1485.000000	47.11	---	74.00	26.89	150.0	V	283.0	2.5
1485.000000	---	42.07	54.00	11.93	150.0	V	283.0	2.5
4802.500000	51.91	---	74.00	22.09	150.0	V	73.0	13.3
4805.500000	---	41.33	54.00	12.67	150.0	V	233.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168505519/A003825629-019
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

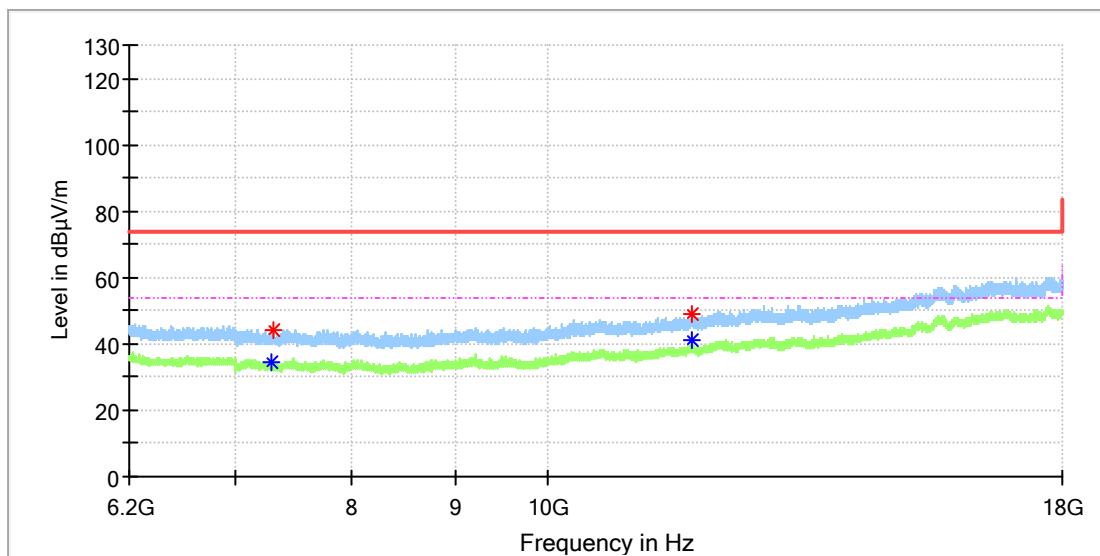

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7297.400000	---	34.44	54.00	19.56	150.0	H	0.0	8.3
7304.283333	44.03	---	74.00	29.97	150.0	H	5.0	8.3
11776.975000	48.77	---	74.00	25.23	150.0	H	196.0	13.4
11796.150000	---	41.01	54.00	12.99	150.0	H	355.0	13.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

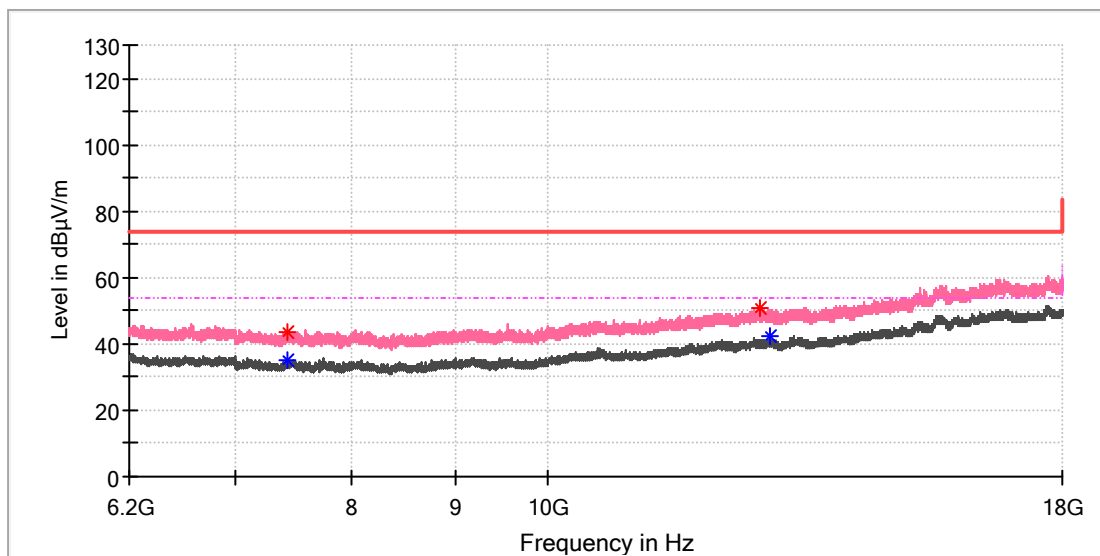

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7425.725000	43.38	---	74.00	30.62	150.0	V	201.0	8.4
7431.625000	---	34.82	54.00	19.18	150.0	V	176.0	8.4
12744.083333	50.62	---	74.00	23.38	150.0	V	237.0	15.2
12879.291667	---	42.41	54.00	11.59	150.0	V	49.0	15.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: OPENFIT 2
Model: SHOKZ T920
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168505519/A003825629-019
Test Voltage:: Battery
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

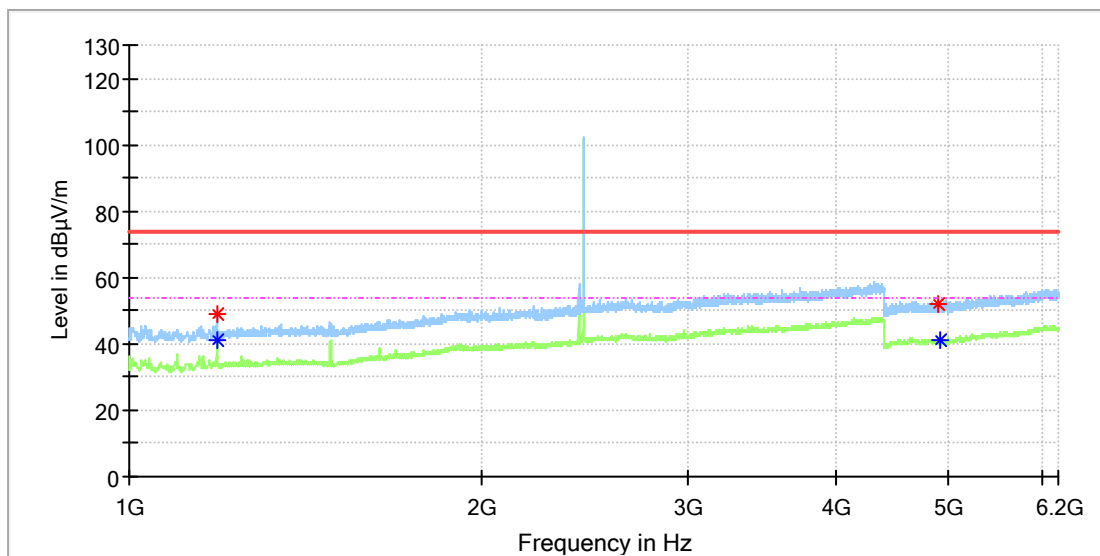

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.500000	49.10	---	74.00	24.90	150.0	H	164.0	1.7
1187.500000	---	41.35	54.00	12.65	150.0	H	164.0	1.7
4887.500000	52.18	---	74.00	21.82	150.0	H	71.0	13.3
4907.000000	---	41.17	54.00	12.83	150.0	H	46.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

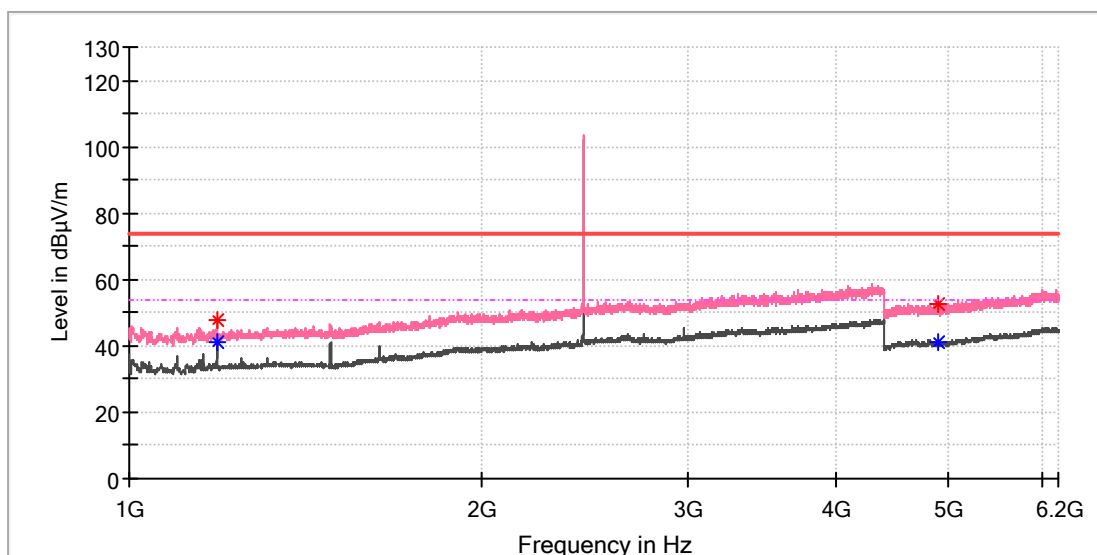

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1188.000000	---	41.02	54.00	12.98	150.0	V	64.0	1.7
1188.000000	47.62	---	74.00	26.38	150.0	V	64.0	1.7
4897.000000	---	41.14	54.00	12.86	150.0	V	254.0	13.3
4901.000000	52.62	---	74.00	21.38	150.0	V	81.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

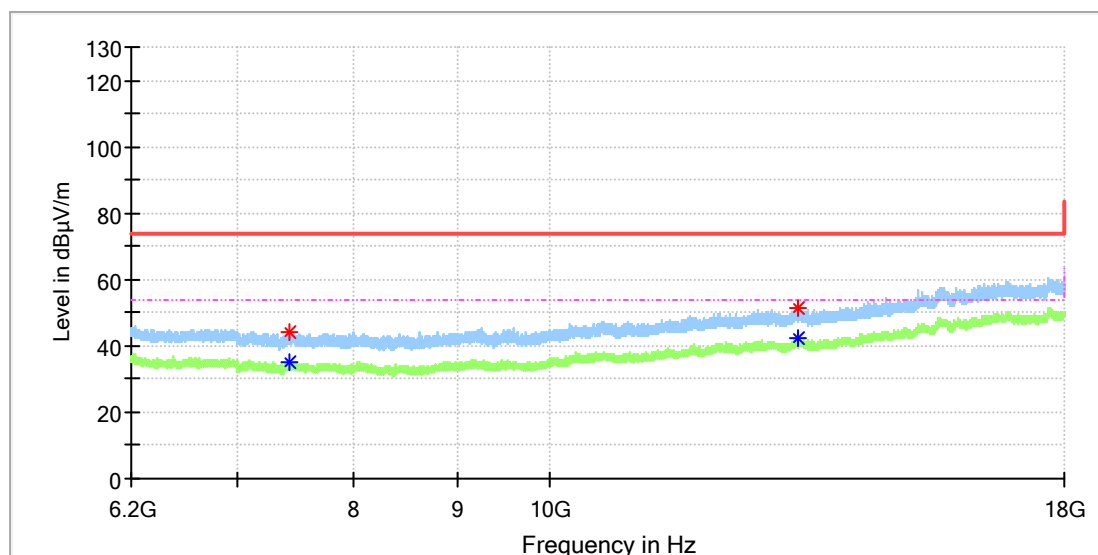

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7421.791667	---	35.21	54.00	18.79	150.0	H	277.0	8.4
7422.283333	44.35	---	74.00	29.65	150.0	H	224.0	8.4
13274.591667	---	42.07	54.00	11.93	150.0	H	338.0	15.5
13281.475000	51.34	---	74.00	22.66	150.0	H	236.0	15.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

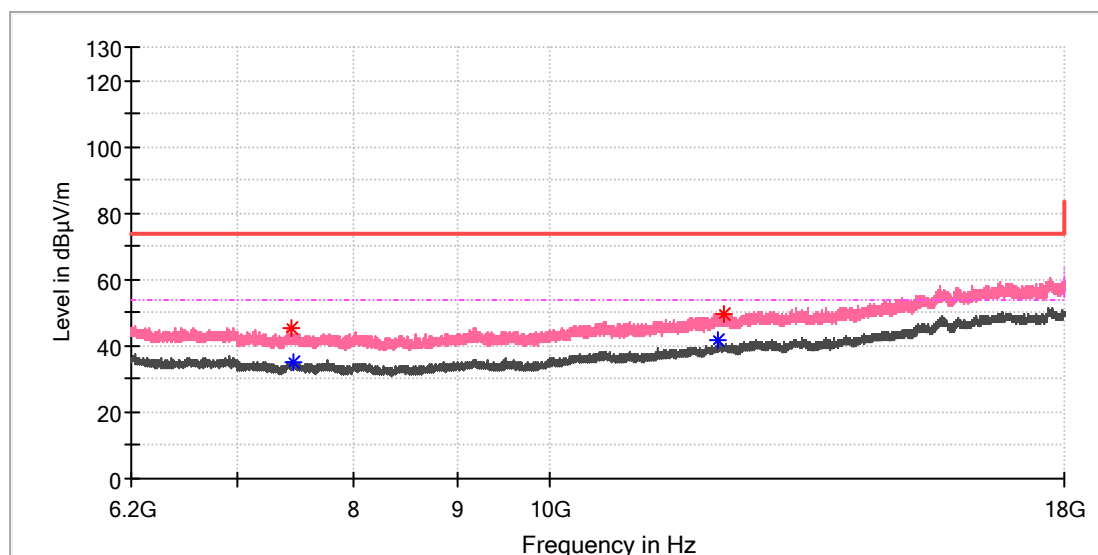

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7445.391667	45.39	---	74.00	28.61	150.0	V	1.0	8.5
7456.700000	---	35.12	54.00	18.88	150.0	V	204.0	8.5
12127.041667	---	41.64	54.00	12.36	150.0	V	20.0	14.3
12190.958333	49.77	---	74.00	24.23	150.0	V	80.0	14.6

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

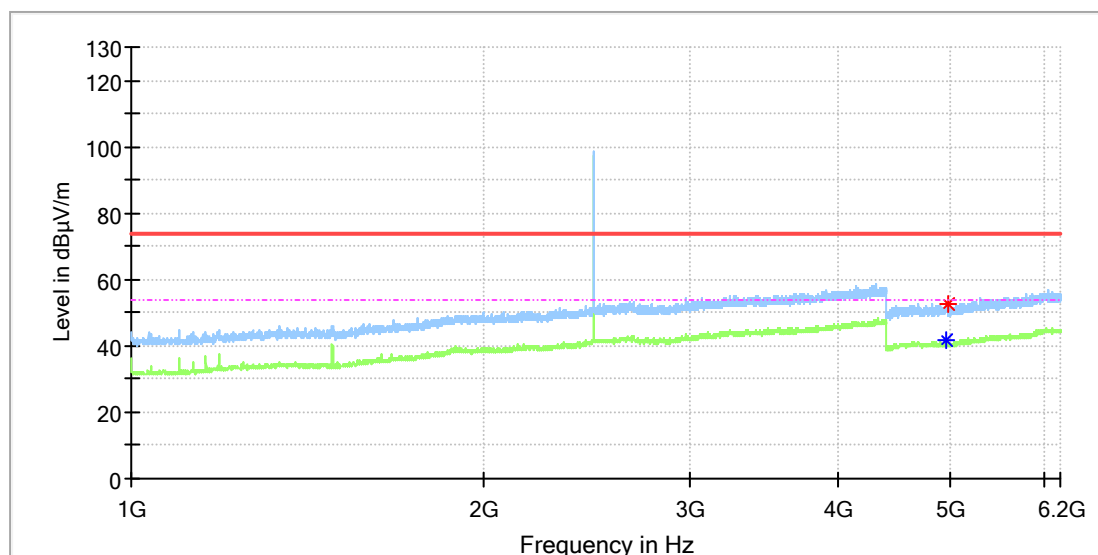

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4952.000000	---	41.54	54.00	12.46	150.0	H	68.0	13.3
4975.000000	52.39	---	74.00	21.61	150.0	H	13.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

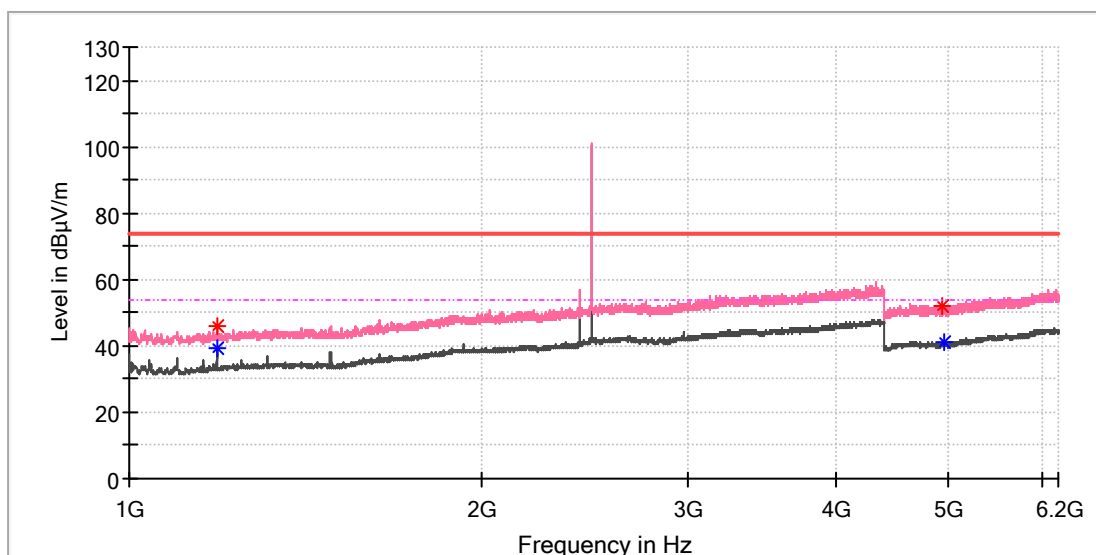

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1187.500000	---	39.38	54.00	14.62	150.0	V	81.0	1.7
1188.000000	45.84	---	74.00	28.16	150.0	V	81.0	1.7
4939.000000	51.76	---	74.00	22.24	150.0	V	101.0	13.3
4950.000000	---	41.15	54.00	12.85	150.0	V	340.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

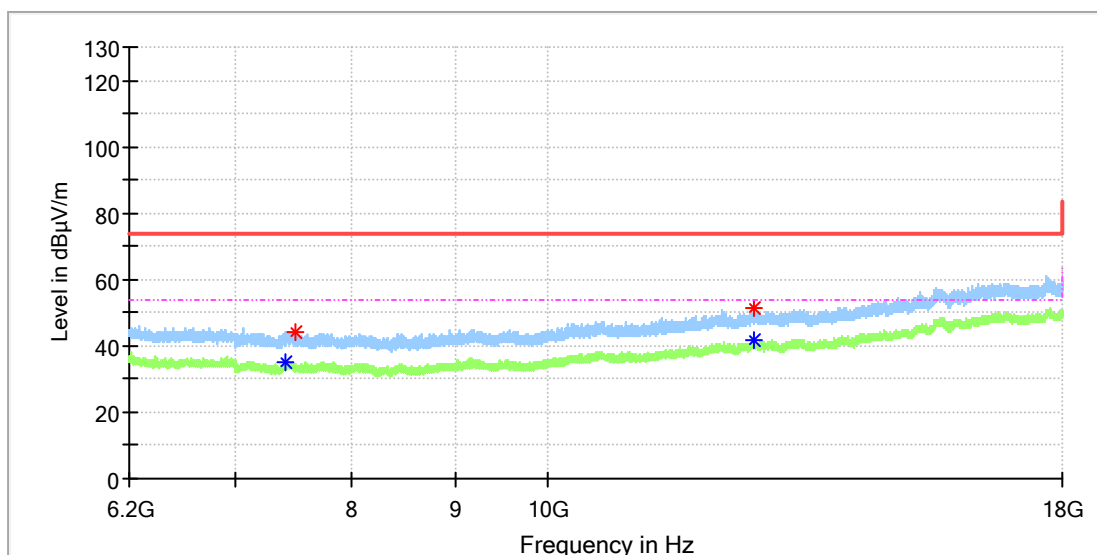

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7417.366667	---	35.08	54.00	18.92	150.0	H	316.0	8.3
7488.658333	44.30	---	74.00	29.70	150.0	H	186.0	8.7
12645.258333	51.19	---	74.00	22.81	150.0	H	58.0	15.0
12659.025000	---	41.67	54.00	12.33	150.0	H	1.0	15.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

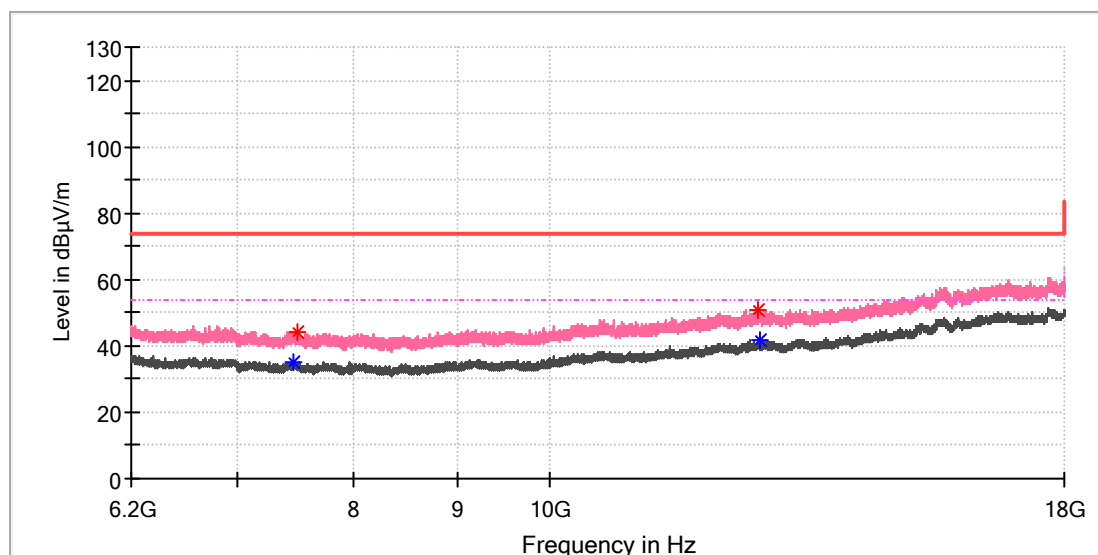

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7453.750000	---	35.05	54.00	18.95	150.0	V	0.0	8.5
7497.508333	44.11	---	74.00	29.89	150.0	V	120.0	8.7
12673.775000	50.82	---	74.00	23.18	150.0	V	220.0	15.1
12719.991667	---	41.62	54.00	12.38	150.0	V	280.0	15.1

Final_Result


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

Left earbud

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

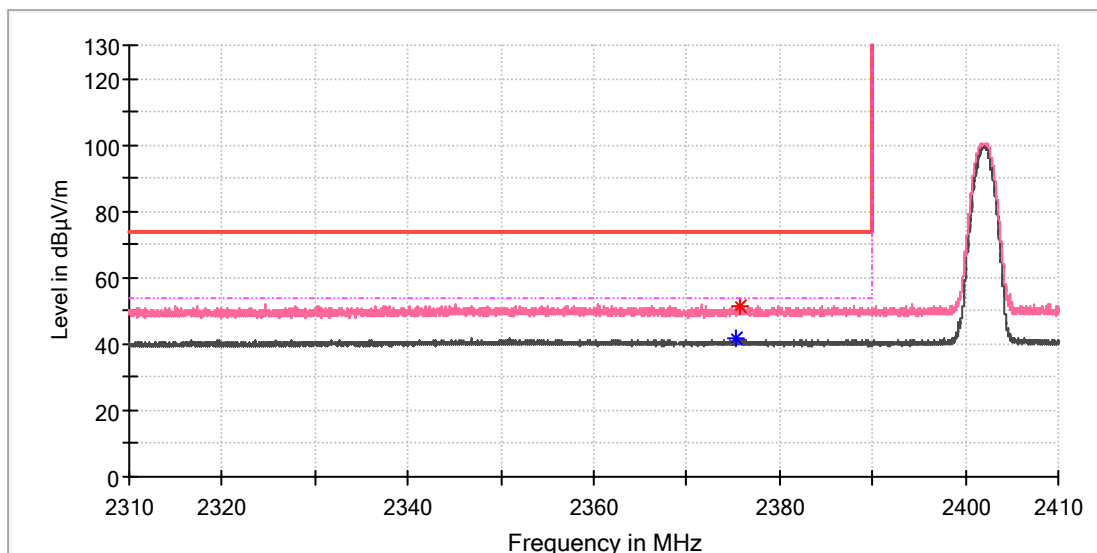

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2375.382353	---	41.48	54.00	12.52	150.0	V	328.0	8.5
2375.808824	51.69	---	74.00	22.31	150.0	V	11.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

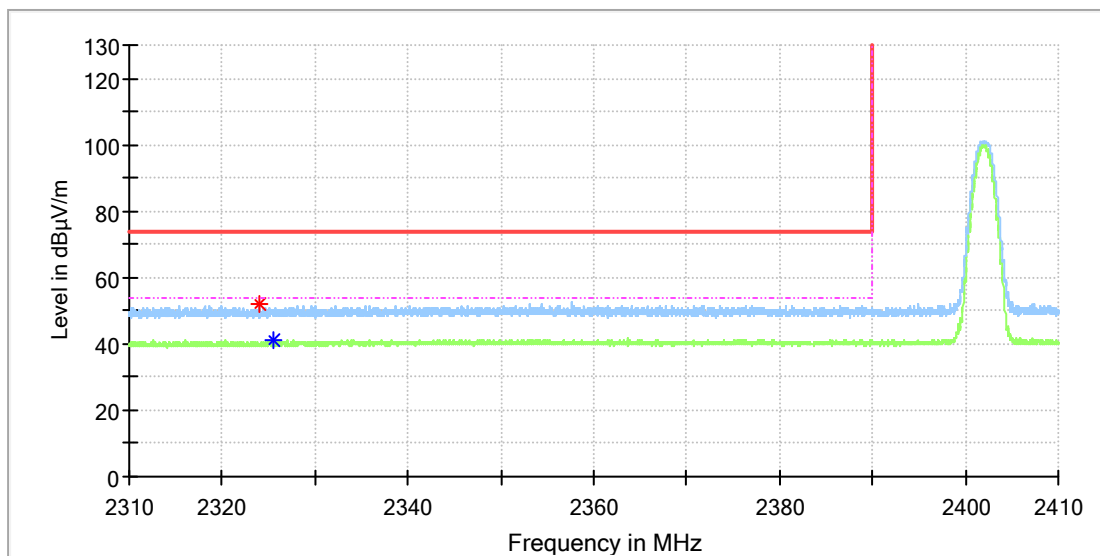

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2324.029412	51.75	---	74.00	22.25	150.0	H	160.0	8.2
2325.514706	---	40.85	54.00	13.15	150.0	H	22.0	8.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

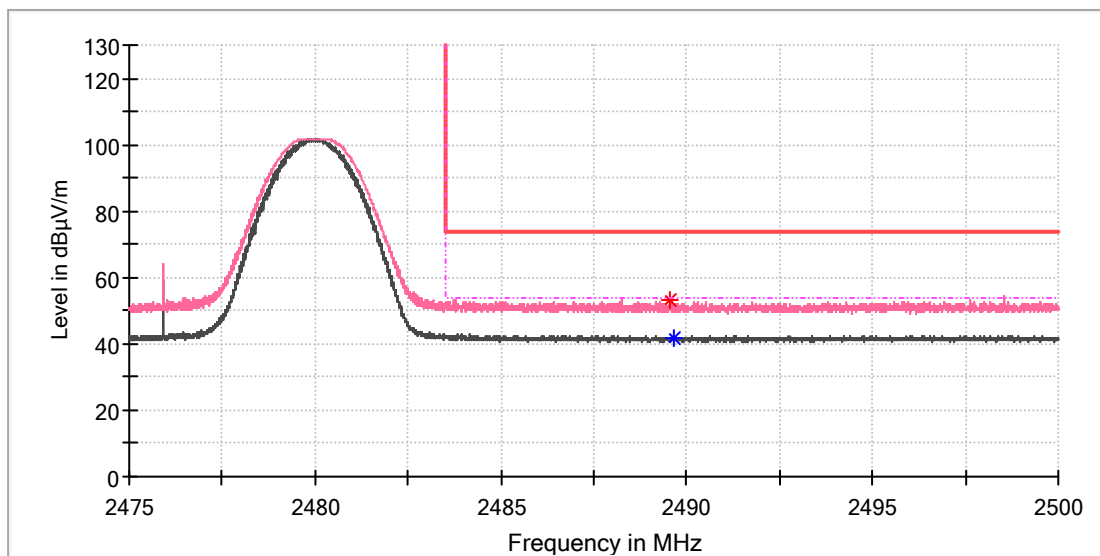

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.551471	53.37	---	74.00	20.63	150.0	V	111.0	9.0
2489.650735	---	41.92	54.00	12.08	150.0	V	124.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

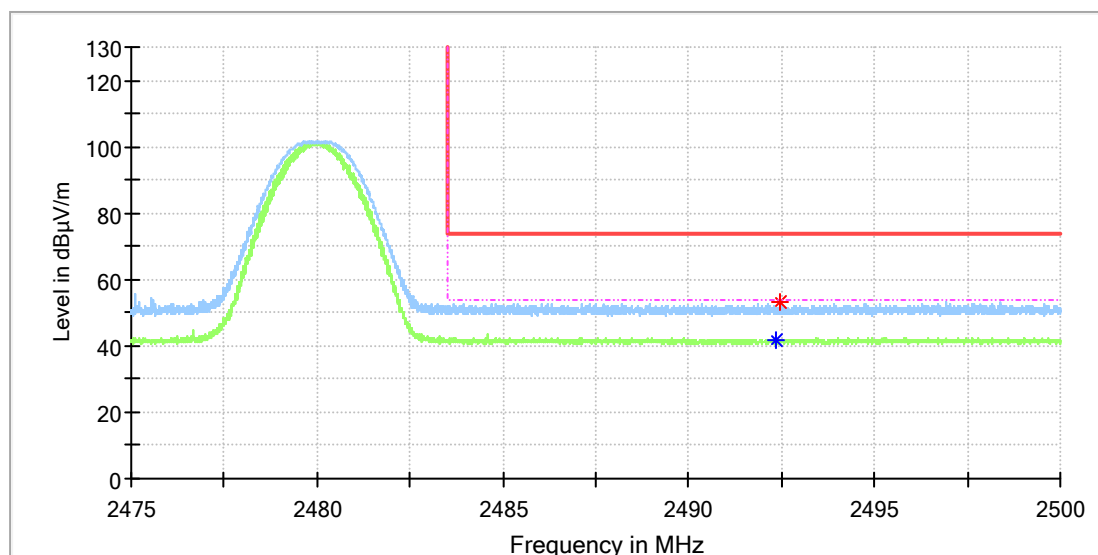

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2492.323529	---	41.91	54.00	12.09	150.0	H	196.0	9.0
2492.459559	52.95	---	74.00	21.05	150.0	H	307.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

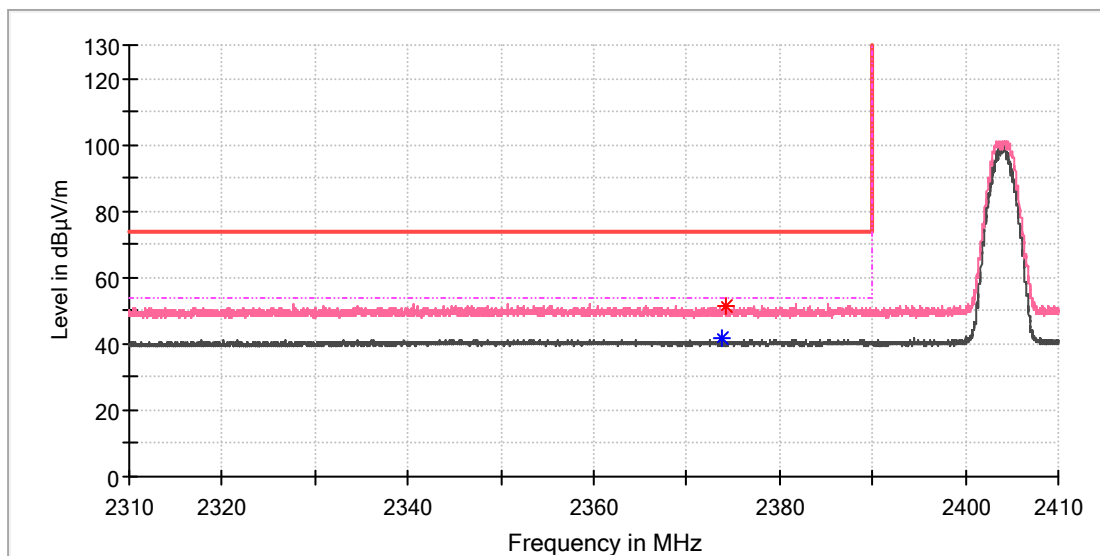

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2373.897059	---	41.59	54.00	12.41	150.0	V	336.0	8.5
2374.147059	51.64	---	74.00	22.36	150.0	V	111.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

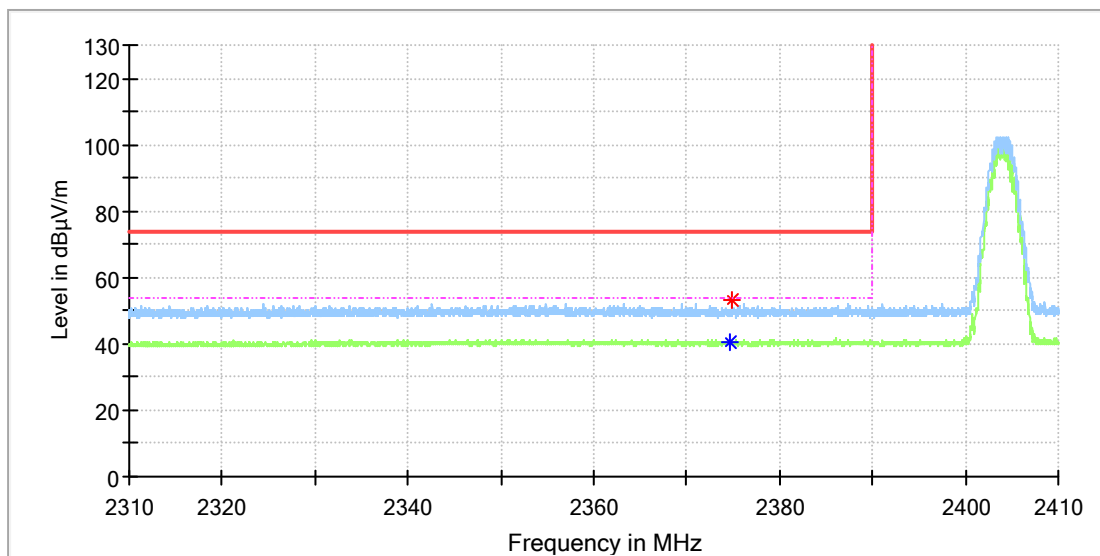

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2374.735294	---	40.47	54.00	13.53	150.0	H	68.0	8.5
2374.794118	53.03	---	74.00	20.97	150.0	H	313.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

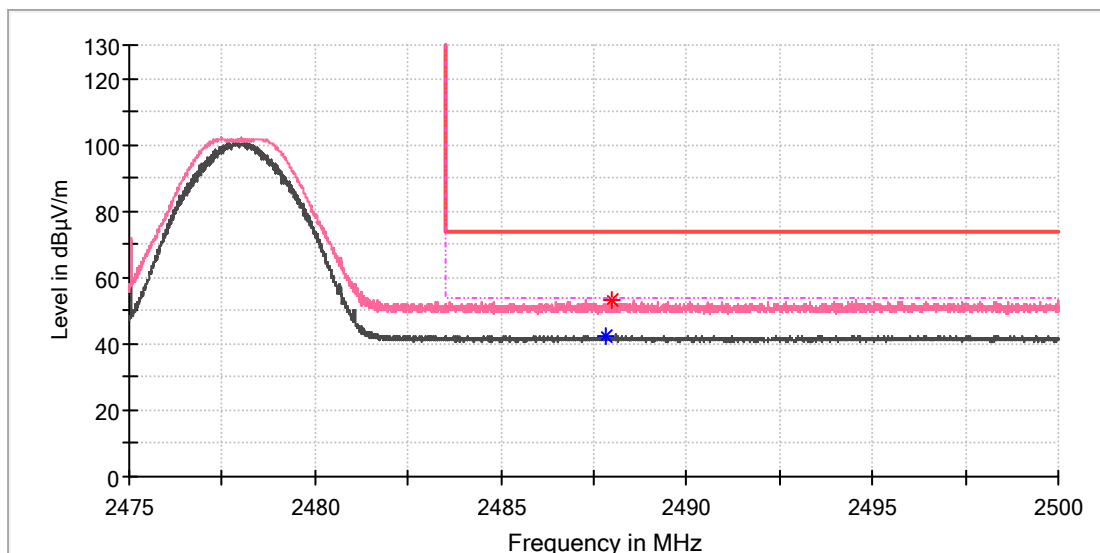

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.819853	---	42.40	54.00	11.60	150.0	V	272.0	9.0
2487.963235	53.50	---	74.00	20.50	150.0	V	229.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168505519/A003825629-018
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

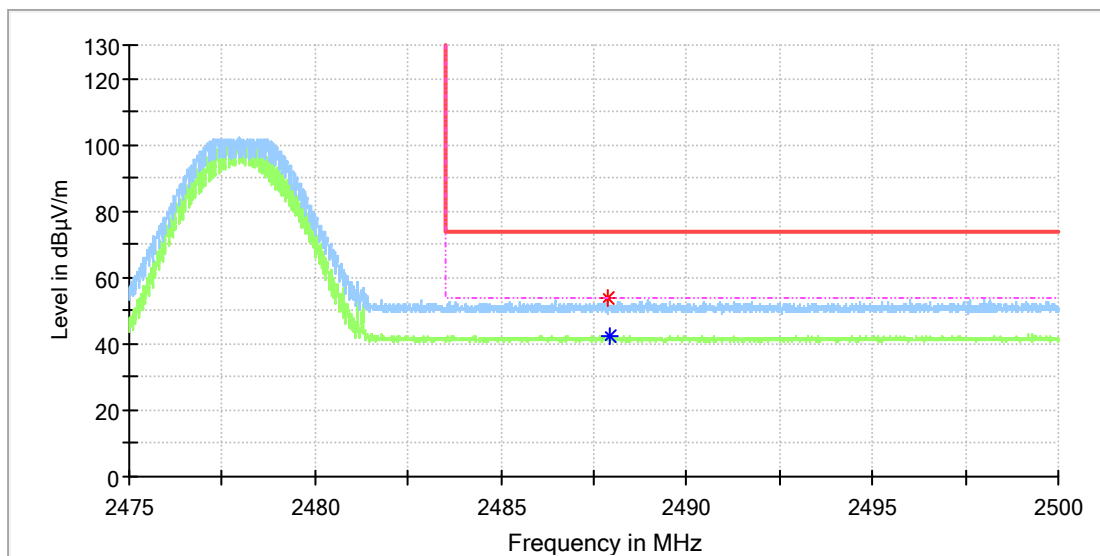

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.854412	53.69	---	74.00	20.31	150.0	H	199.0	9.0
2487.947059	---	42.33	54.00	11.67	150.0	H	33.0	9.0


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Right earbud

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

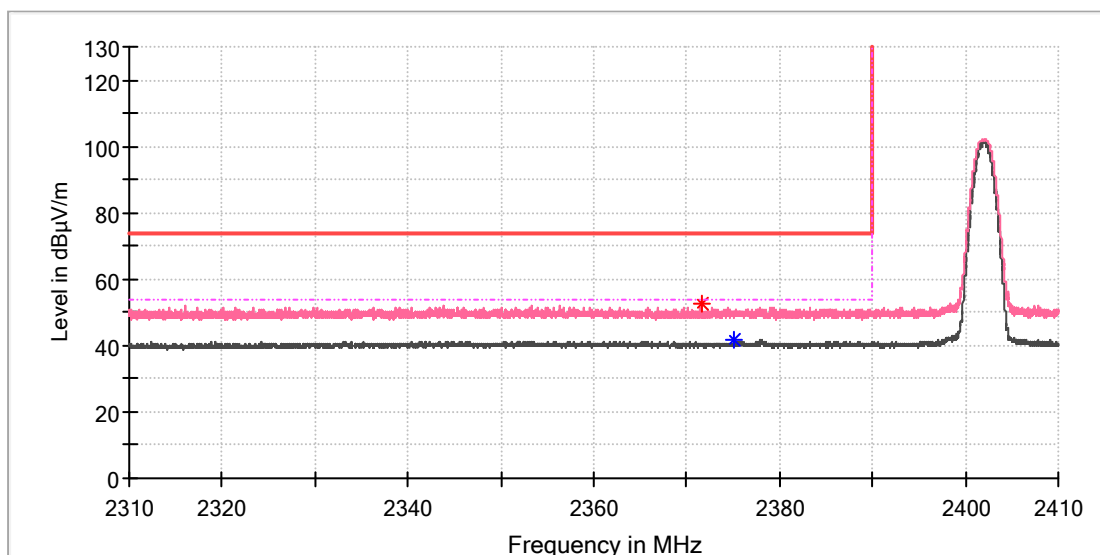

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2371.691177	52.66	---	74.00	21.34	150.0	V	301.0	8.5
2375.029412	---	41.47	54.00	12.53	150.0	V	0.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

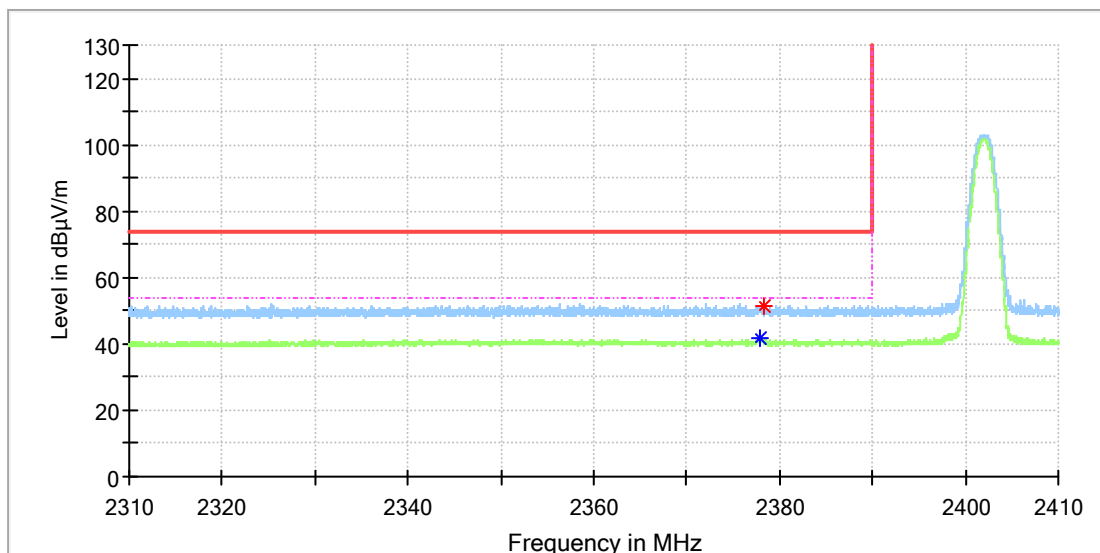

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2377.911765	---	41.87	54.00	12.13	150.0	H	357.0	8.5
2378.308824	51.64	---	74.00	22.36	150.0	H	318.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

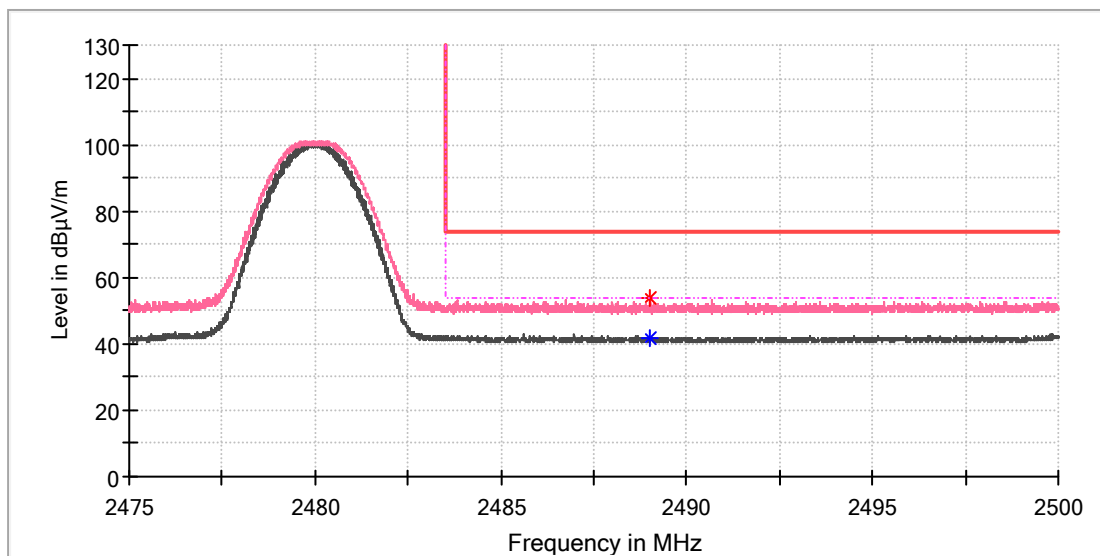

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.014706	---	41.84	54.00	12.16	150.0	V	22.0	9.0
2489.033088	53.54	---	74.00	20.46	150.0	V	34.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

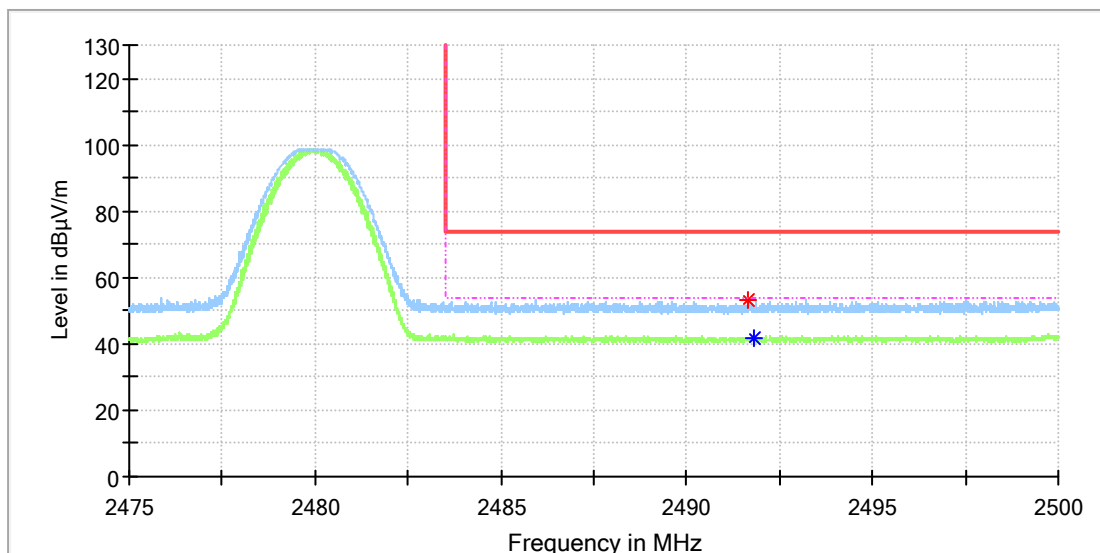

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2491.672794	53.37	---	74.00	20.63	150.0	H	340.0	9.0
2491.816177	---	41.94	54.00	12.06	150.0	H	244.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

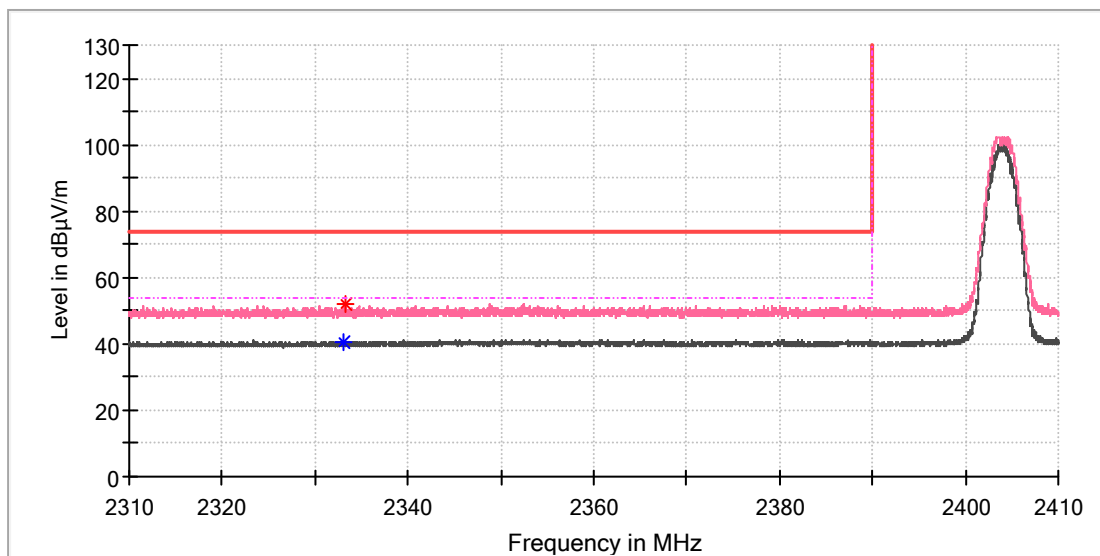

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2333.058824	---	40.75	54.00	13.25	150.0	V	265.0	8.3
2333.323530	51.83	---	74.00	22.17	150.0	V	335.0	8.3

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_Low channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

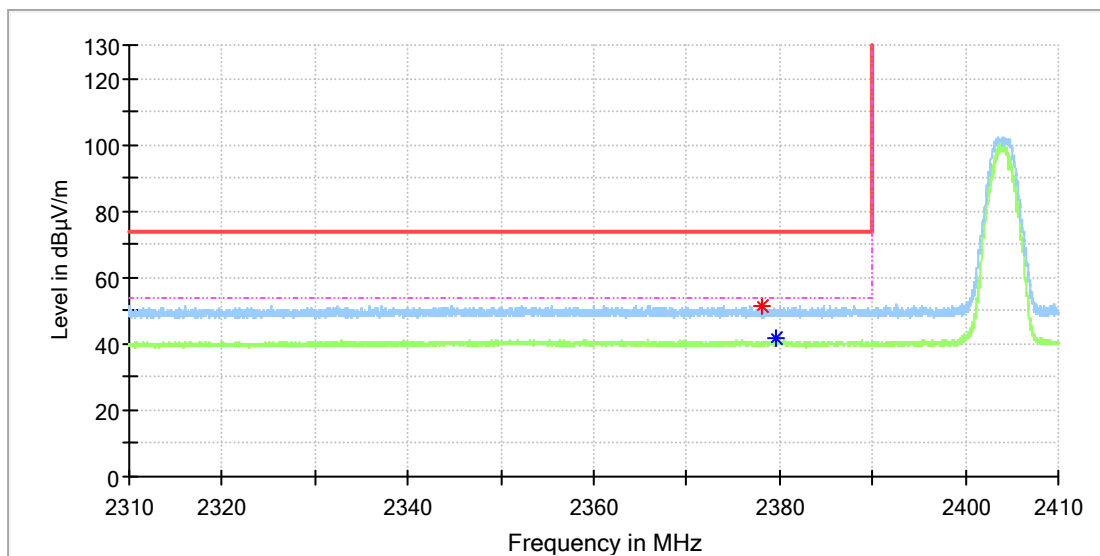

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2378.014706	51.48	---	74.00	22.52	150.0	H	272.0	8.5
2379.632353	---	41.84	54.00	12.16	150.0	H	121.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

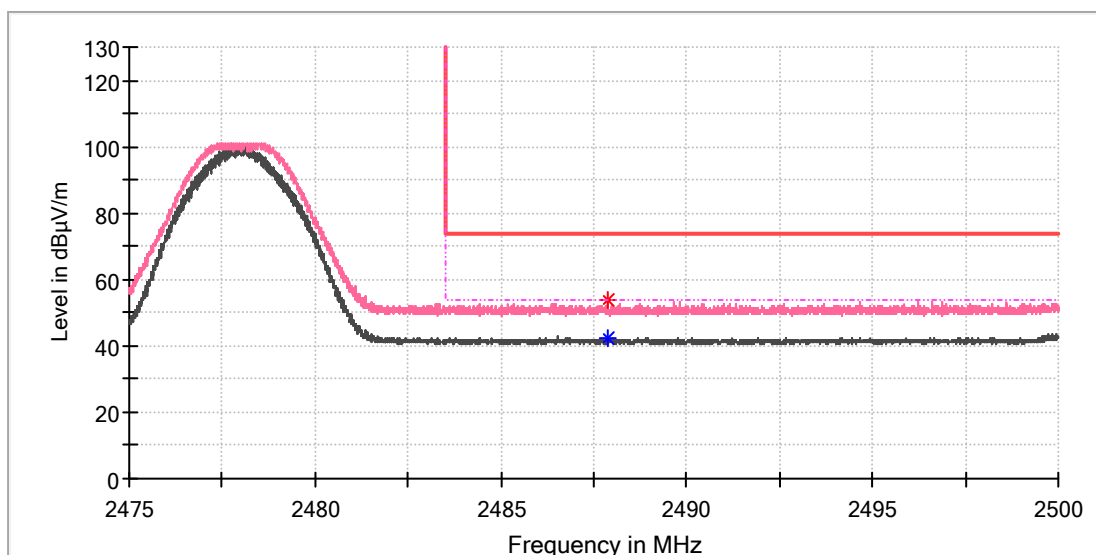

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.863971	54.08	---	74.00	19.92	150.0	V	44.0	9.0
2487.871324	---	42.09	54.00	11.91	150.0	V	0.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	OPENFIT 2
Model:	SHOKZ T920
Test Mode:	BLE 2M_High channel
Order No/Sample No:	168505519/A003825629-019
Test Voltage::	Battery
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

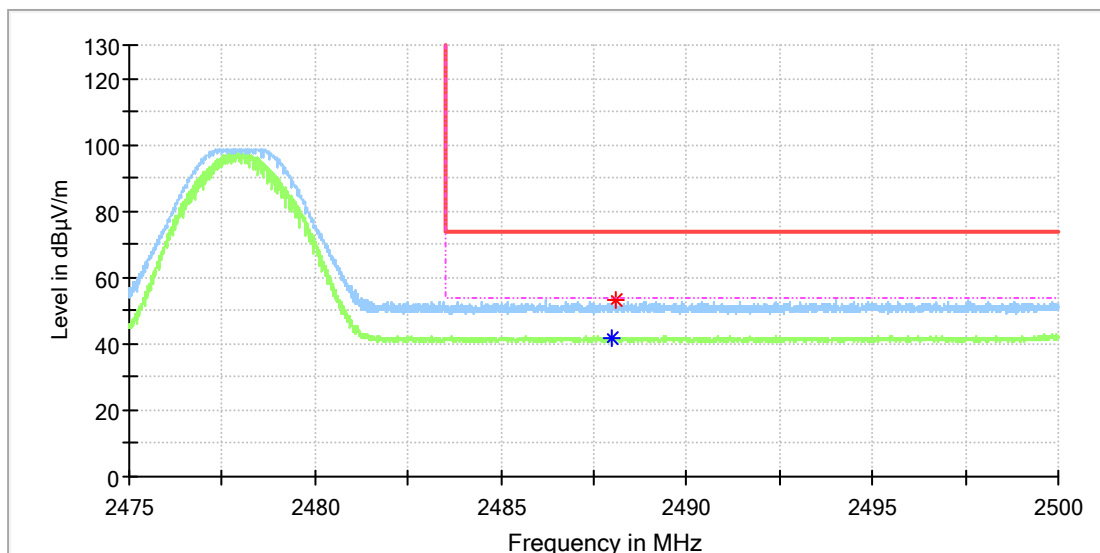

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.974265	---	41.92	54.00	12.08	150.0	H	0.0	9.0
2488.113971	52.95	---	74.00	21.05	150.0	H	225.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---