

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + Cable loss + Antenna factor Sample calculation: (90.10 dBuV/m) = (43.20 dBuV) + (12.40 dB) + (34.50 dB), the corresponding frequency is 5180MHz.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

Note: There were no emissions above 18GHz found within 20dB of the limit. Thus the test result was not reported according to §15.31 (o)

【5150-5250】

● 802.11a

Carrier Frequency (MHz): 5180

Channel No.: 36

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5180.0	43.20	90.10	N/A	N/A	12.40	34.50
5150.0	-1.20	45.70	-28.30	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5180.0	29.80	76.70	N/A	N/A	12.40	34.50
5150.0	-12.30	34.60	-19.40	54.00	12.40	34.50

Carrier Frequency (MHz): 5240

Channel No.: 48

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5240.0	46.40	93.30	N/A	N/A	12.40	34.50
5250.0	10.80	57.70	-16.30	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5240.0	31.70	78.60	N/A	N/A	12.40	34.50
5250.0	-10.60	36.30	-17.70	54.00	12.40	34.50

● 802.11n (HT20)

Carrier Frequency (MHz): 5180

Channel No.: 36

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5180.0	40.00	86.90	N/A	N/A	12.40	34.50
5150.0	6.10	53.00	-21.00	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5180.0	27.50	74.40	N/A	N/A	12.40	34.50
5150.0	-8.10	38.80	-15.20	54.00	12.40	34.50

Carrier Frequency (MHz): 5240

Channel No.: 48

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5240.0	45.80	92.70	N/A	N/A	12.40	34.50
5250.0	8.20	55.10	-18.90	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5240.0	24.30	71.20	N/A	N/A	12.40	34.50
5250.0	-6.90	40.00	-14.00	54.00	12.40	34.50

● 802.11n (HT40)

Carrier Frequency (MHz): 5190

Channel No.: 38

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5190.0	49.90	96.80	N/A	N/A	12.40	34.50
5150.0	19.30	66.20	-7.80	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5190.0	20.50	67.40	N/A	N/A	12.40	34.50

5150.0	-2.60	44.30	-9.70	54.00	12.40	34.50
--------	-------	-------	-------	-------	-------	-------

Carrier Frequency (MHz): 5230

Channel No.: 46

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5230.0	42.50	89.40	N/A	N/A	12.40	34.50
5250.0	21.40	68.30	-5.70	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5230.0	28.70	75.60	N/A	N/A	12.40	34.50
5250.0	-2.00	44.90	-9.10	54.00	12.40	34.50

● 802.11ac (VHT80)

Carrier Frequency (MHz): 5210

Channel No.: 42

Test Mode: 802.11ac (VHT80)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5210.0	44.60	91.50	N/A	N/A	12.40	34.50
5150.0	19.70	66.60	-7.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5210.0	30.00	76.90	N/A	N/A	12.40	34.50
5150.0	1.80	48.70	-5.30	54.00	12.40	34.50

【5250-5350】

● 802.11a

Carrier Frequency (MHz): 5260

Channel No.: 52

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5260.0	33.30	80.20	N/A	N/A	12.40	34.50
5240.0	-4.40	42.50	-31.50	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
-----------------	----------------------	------------------------	-----------------	----------------	-----------------	---------------------

5260.0	22.40	69.30	N/A	N/A	12.40	34.50
5240.0	-18.60	28.30	-25.70	54.00	12.40	34.50

Carrier Frequency (MHz): 5320

Channel No.: 64

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5320.0	34.70	81.60	N/A	N/A	12.40	34.50
5340.0	-6.50	40.40	-33.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5320.0	18.60	65.50	N/A	N/A	12.40	34.50
5340.0	-19.40	27.50	-26.50	54.00	12.40	34.50

● 802.11n (HT20)

Carrier Frequency (MHz): 5260

Channel No.: 52

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5260.0	41.40	88.30	N/A	N/A	12.40	34.50
5240.0	19.80	66.70	-7.30	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5260.0	18.60	65.50	N/A	N/A	12.40	34.50
5240.0	1.00	47.90	-6.10	54.00	12.40	34.50

Carrier Frequency (MHz): 5320

Channel No.: 64

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5320.0	52.4	99.3	N/A	N/A	12.40	34.50
5340.0	10.8	57.7	-16.3	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5320.0	36.00	82.90	N/A	N/A	12.40	34.50
5340.0	-12.60	34.30	-19.70	54.00	12.40	34.50

● 802.11n (HT40)

Carrier Frequency (MHz): 5270

Channel No.: 54

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5270.0	40.90	87.80	N/A	N/A	12.40	34.50
5230.0	-6.30	40.60	-33.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5270.0	27.60	74.50	N/A	N/A	12.40	34.50
5230.0	-19.00	27.90	-26.10	54.00	12.40	34.50

Carrier Frequency (MHz): 5310

Channel No.: 60

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5310.0	51.40	98.30	N/A	N/A	12.40	34.50
5350.0	13.20	60.10	-13.90	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5310.0	26.60	73.50	N/A	N/A	12.40	34.50
5350.0	-2.60	44.30	-9.70	54.00	12.40	34.50

● 802.11ac (VHT80)

Carrier Frequency (MHz): 5290

Channel No.: 58

Test Mode: 802.11ac (VHT80)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5290.0	43.80	90.70	N/A	N/A	12.40	34.50
5210.0	20.70	67.60	-6.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5290.0	19.90	66.80	N/A	N/A	12.40	34.50

5210.0	-0.80	46.10	-7.90	54.00	12.40	34.50
--------	-------	-------	-------	-------	-------	-------

【5470-5725】

● 802.11a

Carrier Frequency (MHz): 5500

Channel No.: 100

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5500.0	48.00	94.90	N/A	N/A	12.40	34.50
5480.0	12.70	59.60	-14.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5500.0	32.60	79.50	N/A	N/A	12.40	34.50
5480.0	-3.60	43.30	-10.70	54.00	12.40	34.50

Carrier Frequency (MHz): 5700

Channel No.: 140

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5700.0	42.40	89.30	N/A	N/A	12.40	34.50
5720.0	9.30	56.20	-17.80	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5700.0	30.00	76.90	N/A	N/A	12.40	34.50
5720.0	-8.20	38.70	-15.30	54.00	12.40	34.50

● 802.11n (HT20)

Carrier Frequency (MHz): 5500

Channel No.: 100

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5500.0	42.70	89.60	N/A	N/A	12.40	34.50
5480.0	10.70	57.60	-16.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
-----------------	----------------------	------------------------	-----------------	----------------	-----------------	---------------------

5500.0	28.40	75.30	N/A	N/A	12.40	34.50
5480.0	-14.90	32.00	-22.00	54.00	12.40	34.50

Carrier Frequency (MHz): 5700
Channel No.: 140
Test Mode: 802.11n (HT20)
Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5700.0	42.00	88.90	N/A	N/A	12.40	34.50
5720.0	9.50	56.40	-17.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5700.0	29.40	76.30	N/A	N/A	12.40	34.50
5720.0	-13.70	33.20	-20.80	54.00	12.40	34.50

● 802.11n (HT40)
Carrier Frequency (MHz): 5510
Channel No.: 102
Test Mode: 802.11n (HT40)
Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5510.0	54.70	101.60	N/A	N/A	12.40	34.50
5470.0	6.50	53.40	-20.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5510.0	31.40	78.30	N/A	N/A	12.40	34.50
5470.0	-7.80	39.10	-14.90	54.00	12.40	34.50

Carrier Frequency (MHz): 5670
Channel No.: 134
Test Mode: 802.11n (HT40)
Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5670.0	52.70	99.60	N/A	N/A	12.40	34.50
5710.0	17.00	63.90	-10.10	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5670.0	29.70	76.60	N/A	N/A	12.40	34.50

5710.0	0.80	47.70	-6.30	54.00	12.40	34.50
--------	------	-------	-------	-------	-------	-------

● 802.11ac (VHT80)

Carrier Frequency (MHz): 5530

Channel No.: 106

Test Mode: 802.11ac (VHT80)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5530.0	46.00	92.90	N/A	N/A	12.40	34.50
5450.0	11.70	58.60	-15.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5530.0	31.40	78.30	N/A	N/A	12.40	34.50
5450.0	-2.60	44.30	-9.70	54.00	12.40	34.50

Carrier Frequency (MHz): 5690

Channel No.: 138

Test Mode: 802.11ac (VHT80)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5690.0	47.60	94.50	N/A	N/A	12.40	34.50
5770.0	12.50	59.40	-14.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5690.0	32.20	79.10	N/A	N/A	12.40	34.50
5770.0	-2.90	44.00	-10.00	54.00	12.40	34.50

【5725-5850】

● 802.11a

Carrier Frequency (MHz): 5745

Channel No.: 149

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5745.0	40.60	87.50	N/A	N/A	12.40	34.50
5725.0	13.40	60.30	-13.70	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
-----------------	----------------------	------------------------	-----------------	----------------	-----------------	---------------------

5745.0	25.20	72.10	N/A	N/A	12.40	34.50
5725.0	-3.30	43.60	-10.40	54.00	12.40	34.50

Carrier Frequency (MHz): 5825

Channel No.: 165

Test Mode: 802.11a

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5825.0	38.40	85.30	N/A	N/A	12.40	34.50
5845.0	7.70	54.60	-19.40	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5825.0	33.50	80.40	N/A	N/A	12.40	34.50
5845.0	-8.20	38.70	-15.30	54.00	12.40	34.50

● 802.11n (HT20)

Carrier Frequency (MHz): 5745

Channel No.: 149

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5745.0	50.60	97.50	N/A	N/A	12.40	34.50
5725.0	13.40	60.30	-13.70	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5745.0	27.80	74.70	N/A	N/A	12.40	34.50
5725.0	-3.30	43.60	-10.40	54.00	12.40	34.50

Carrier Frequency (MHz): 5825

Channel No.: 165

Test Mode: 802.11n (HT20)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5825.0	45.60	92.50	N/A	N/A	12.40	34.50
5845.0	9.50	56.40	-17.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5825.0	21.60	68.50	N/A	N/A	12.40	34.50
5845.0	-14.40	32.50	-21.50	54.00	12.40	34.50

● 802.11n (HT40)

Carrier Frequency (MHz): 5755

Channel No.: 151

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5755.0	34.30	81.20	N/A	N/A	12.40	34.50
5715.0	11.80	58.70	-15.30	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5755.0	21.80	68.70	N/A	N/A	12.40	34.50
5715.0	-2.30	44.60	-9.40	54.00	12.40	34.50

Carrier Frequency (MHz): 5795

Channel No.: 159

Test Mode: 802.11n (HT40)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5795.0	41.40	88.30	N/A	N/A	12.40	34.50
5835.0	7.80	54.70	-19.30	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5795.0	25.70	72.60	N/A	N/A	12.40	34.50
5835.0	-4.30	42.60	-11.40	54.00	12.40	34.50

● 802.11ac (VHT80)

Carrier Frequency (MHz): 5775

Channel No.: 155

Test Mode: 802.11ac (VHT80)

Detector: Peak

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5775.0	39.80	86.70	N/A	N/A	12.40	34.50
5695.0	-0.50	46.40	-27.60	74.00	12.40	34.50

Detector: Average

Frequency (MHz)	Reading Level (dBuV)	Measure Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB)
5775.0	16.50	63.40	N/A	N/A	12.40	34.50

5695.0	-9.40	37.50	-16.50	54.00	12.40	34.50
--------	-------	-------	--------	-------	-------	-------

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Below 1GHz:

QuasiPeak=Reading Value + A_{Rpl}

Above 1GHz:

MaxPeak=Reading MaxPeak + A_{Rpl}

OR

Average=Reading Average + A_{Rpl}

Sample calculation: $(25.83 \text{ dB}\mu\text{V/m}) = (48.73 \text{ dB}\mu\text{V}) + (-22.90 \text{ dB/m})$, the corresponding frequency is 35.141MHz.

The worst case attitude: The mobile lay down.

Spurious Radiated Emissions below 30MHz and above 18G:

There were no emissions from 9kHz to 30MHz and above 18G found within 20dB of the limit. Thus, the test result was not reported according to §15.31 (o).


【5150~5250】

● 802.11a

Spurious Radiated Emissions from 30MHz to 1GHz:

CH Middle (No.44)


Full Spectrum

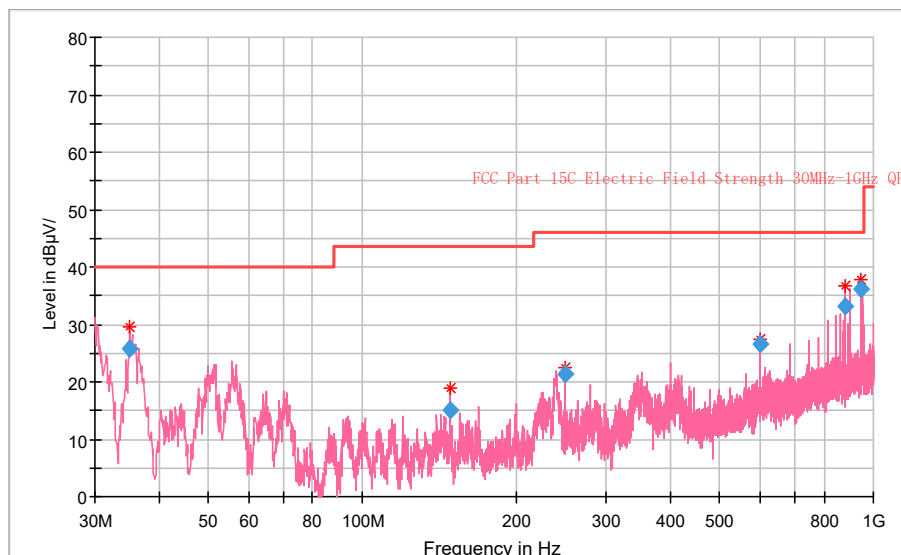


Frequency (MHz)	Reading (dBuV)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
35.141	48.73	25.83	40.00	14.17	-22.90	Vertical
148.437	38.86	15.06	43.50	28.44	-23.80	Vertical
249.996	39.61	21.41	46.00	24.59	-18.20	Vertical
599.972	34.46	26.46	46.00	19.54	-8.00	Vertical
879.914	36.70	33.20	46.00	12.80	-3.50	Vertical
945.389	38.62	36.22	46.00	9.78	-2.40	Vertical

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.44)

Full Spectrum

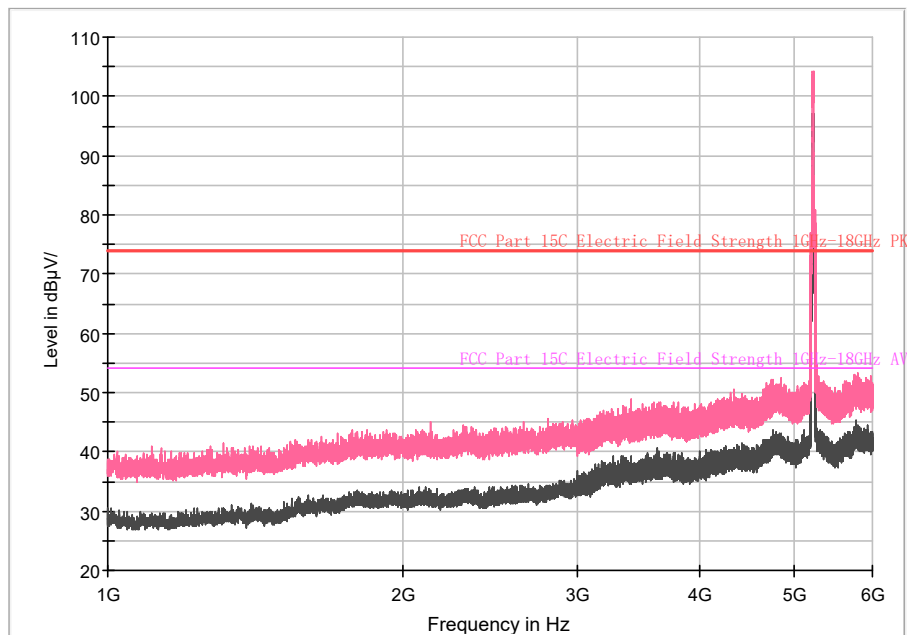


Full Spectrum

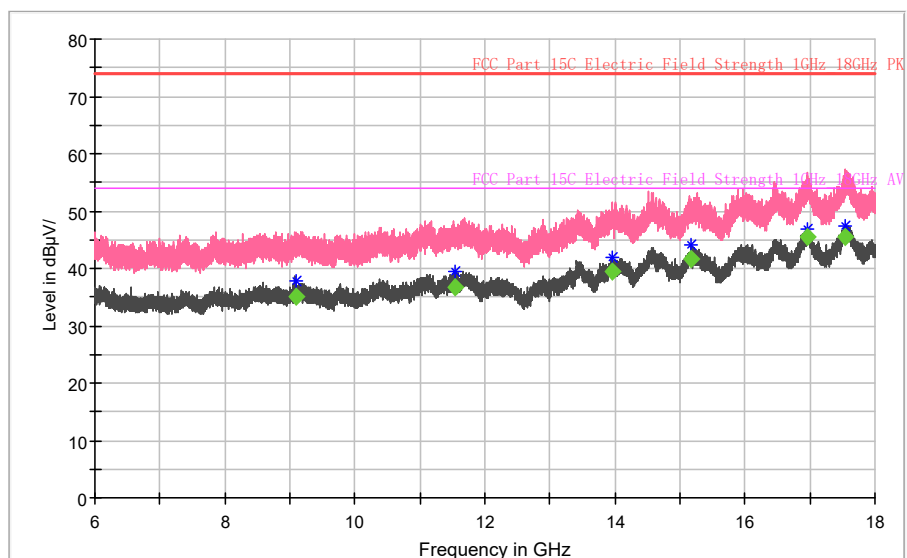


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
9091.600	---	55.27	---	34.97	54.00	19.03	-20.30	Vertical
11543.600	---	53.70	---	36.80	54.00	17.20	-16.90	Vertical
13951.600	---	53.90	---	39.50	54.00	14.50	-14.40	Vertical
15170.400	---	55.60	---	41.60	54.00	12.40	-14.00	Vertical
16956.400	---	58.28	---	45.38	54.00	8.62	-12.90	Vertical
17536.400	---	57.59	---	45.59	54.00	8.41	-12.00	Vertical

- 802.11n (HT20)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.44)

Full Spectrum

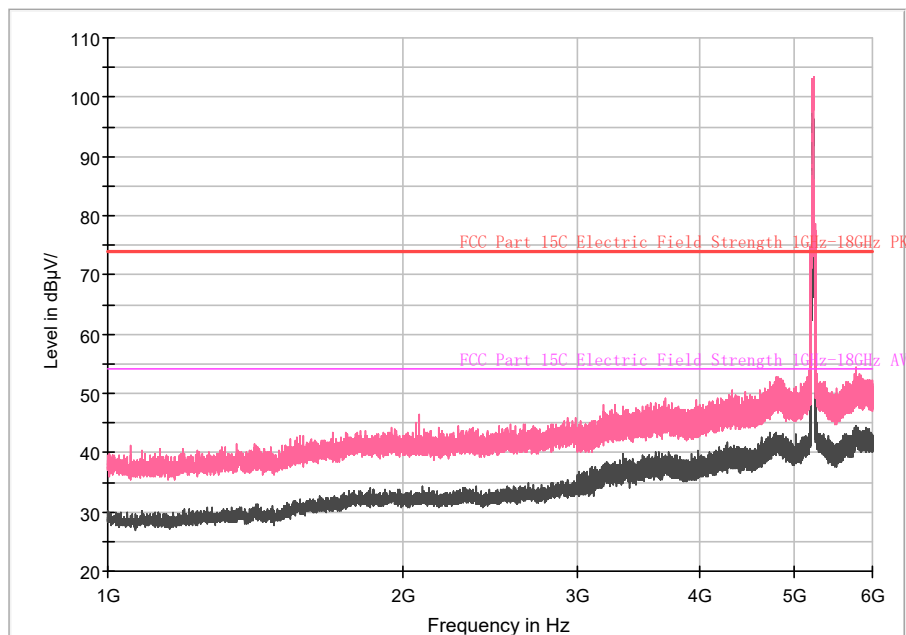

Full Spectrum

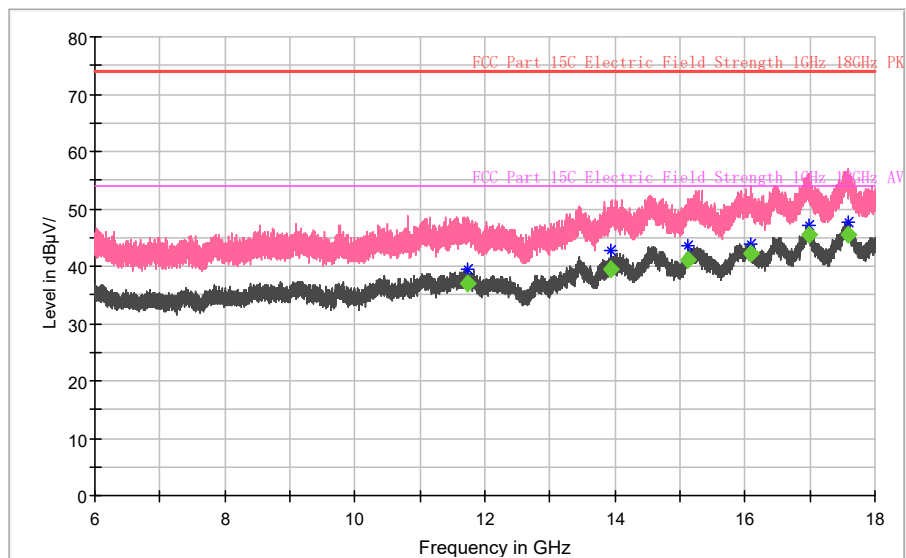



Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11731.600	---	54.08	---	37.08	54.00	16.92	-17.00	Vertical
13947.200	---	53.98	---	39.58	54.00	14.42	-14.40	Vertical
15130.800	---	55.16	---	41.06	54.00	12.94	-14.10	Vertical
16090.000	---	56.95	---	42.15	54.00	11.85	-14.80	Vertical
16973.200	---	58.26	---	45.36	54.00	8.64	-12.90	Vertical
17600.400	---	57.39	---	45.59	54.00	8.41	-11.80	Vertical

● 802.11n (HT40)

Spurious Radiated Emissions from 1GHz to 18GHz:


CH Middle (No.38)

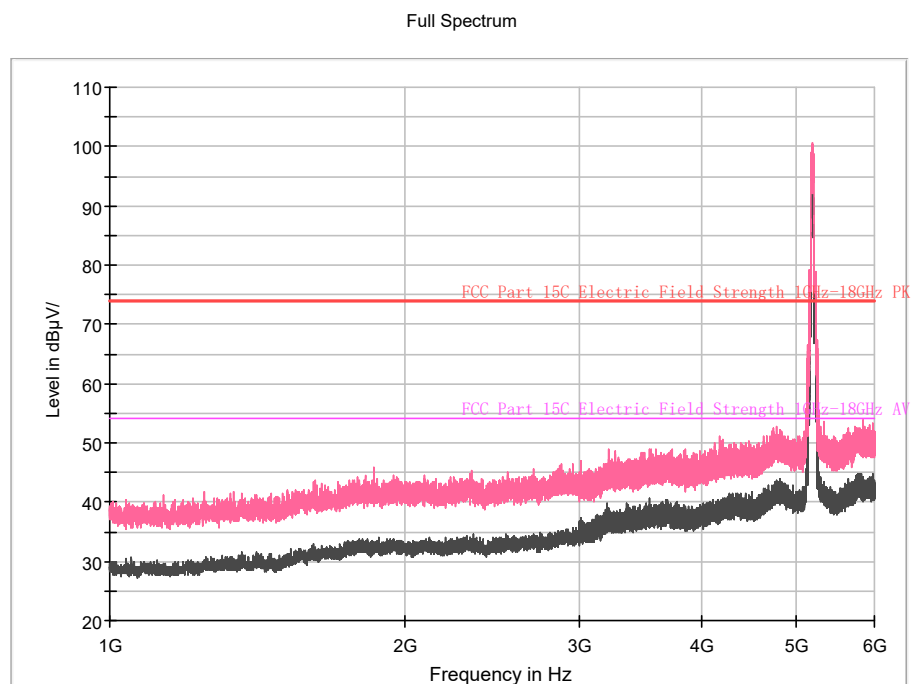

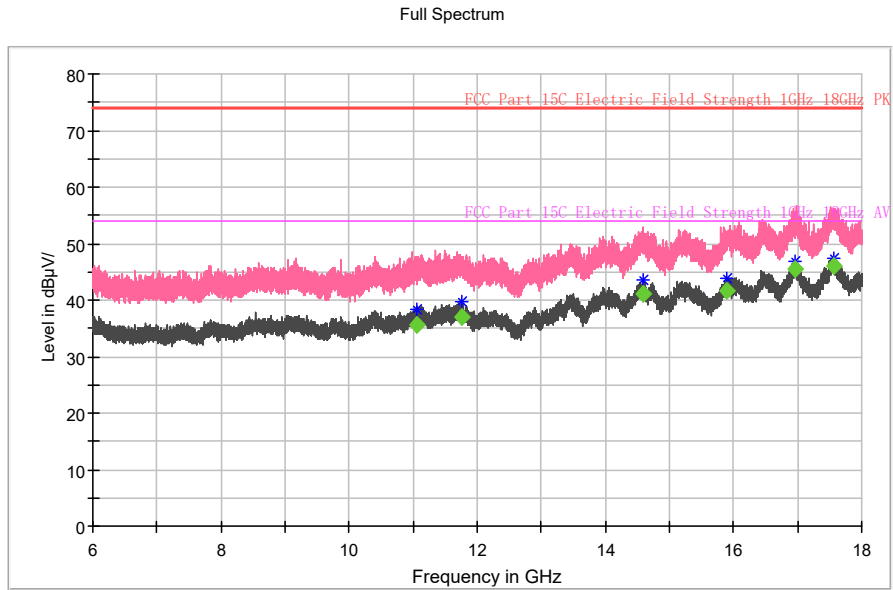


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11059.200	---	53.82	---	35.72	54.00	18.28	-18.10	Vertical
11754.000	---	53.94	---	36.94	54.00	17.06	-17.00	Vertical
14588.400	---	55.13	---	41.03	54.00	12.97	-14.10	Vertical
15885.600	---	56.18	---	41.68	54.00	12.32	-14.50	Vertical
16967.600	---	58.28	---	45.38	54.00	8.62	-12.90	Vertical
17570.800	---	57.88	---	45.98	54.00	8.02	-11.90	Vertical

- 802.11n (HT40)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.46)

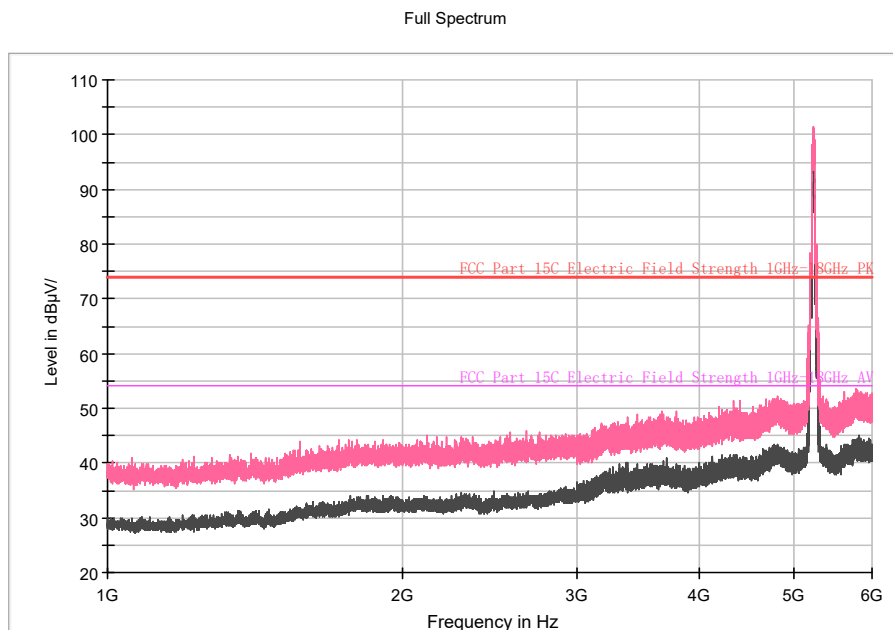


Full Spectrum

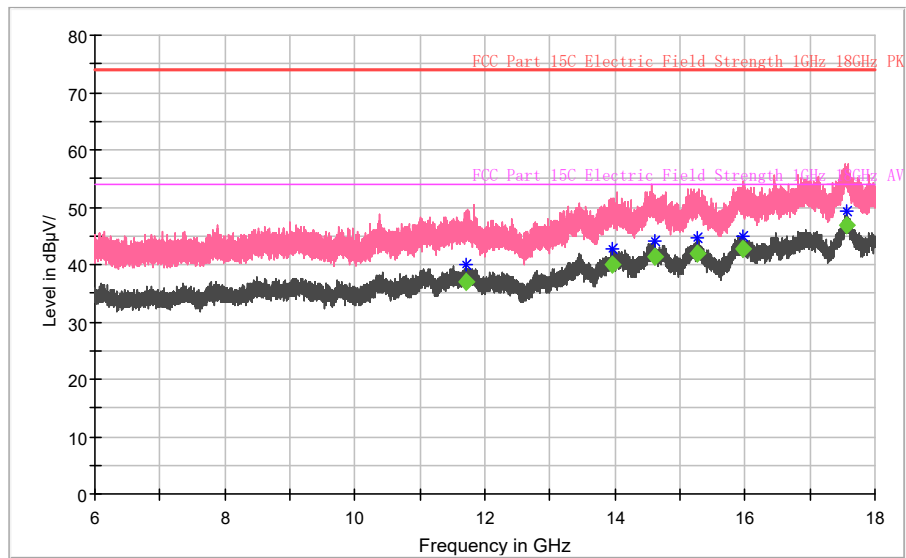


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11701.200	---	53.53	---	36.93	54.00	17.07	-16.60	Vertical
13952.400	---	53.79	---	40.09	54.00	13.91	-13.70	Vertical
14604.400	---	54.82	---	41.32	54.00	12.68	-13.50	Vertical
15263.200	---	55.34	---	41.84	54.00	12.16	-13.50	Vertical
15960.000	---	56.61	---	42.71	54.00	11.29	-13.90	Vertical
17564.000	---	58.15	---	46.95	54.00	7.05	-11.20	Vertical

- 802.11ac (VHT80)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.42)

Full Spectrum

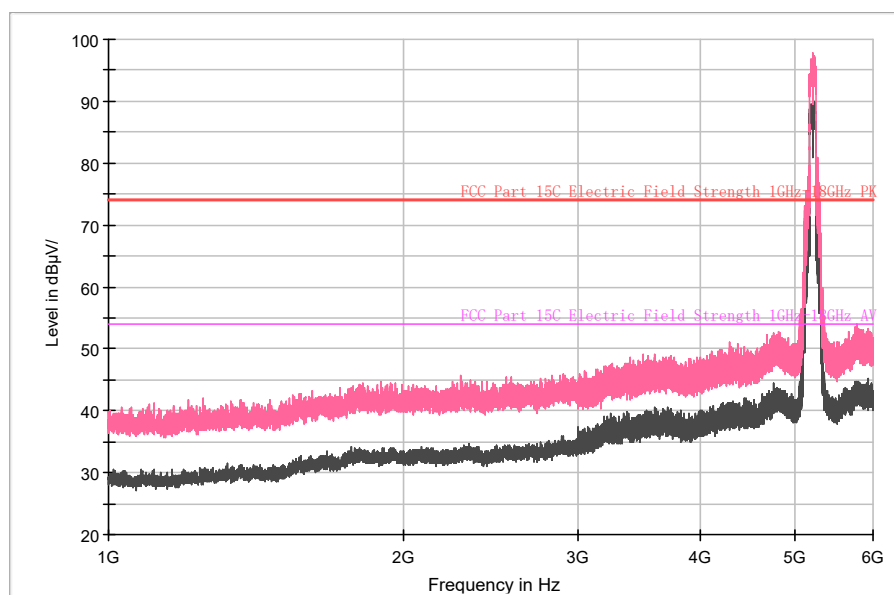

Full Spectrum

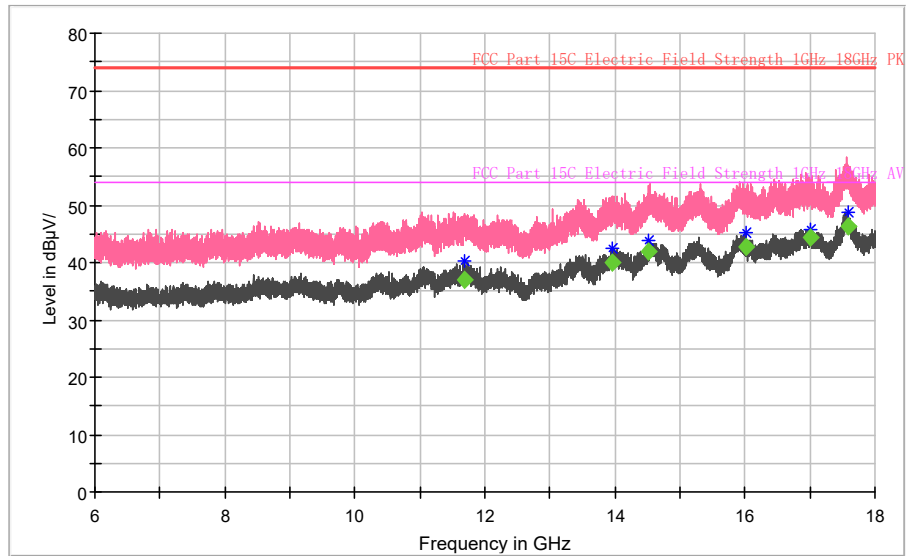

Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11692.800	---	53.47	---	36.87	54.00	17.13	-16.60	Vertical
13954.800	---	53.75	---	40.05	54.00	13.95	-13.70	Vertical
14524.800	---	55.28	---	41.88	54.00	12.12	-13.40	Vertical
16004.800	---	56.76	---	42.76	54.00	11.24	-14.00	Vertical
16998.000	---	56.46	---	44.26	54.00	9.74	-12.20	Vertical
17589.200	---	57.61	---	46.41	54.00	7.59	-11.20	Vertical


【5250~5350】

● 802.11a


Spurious Radiated Emissions from 1GHz to 18GHz:

CH Middle (No.60)

Full Spectrum

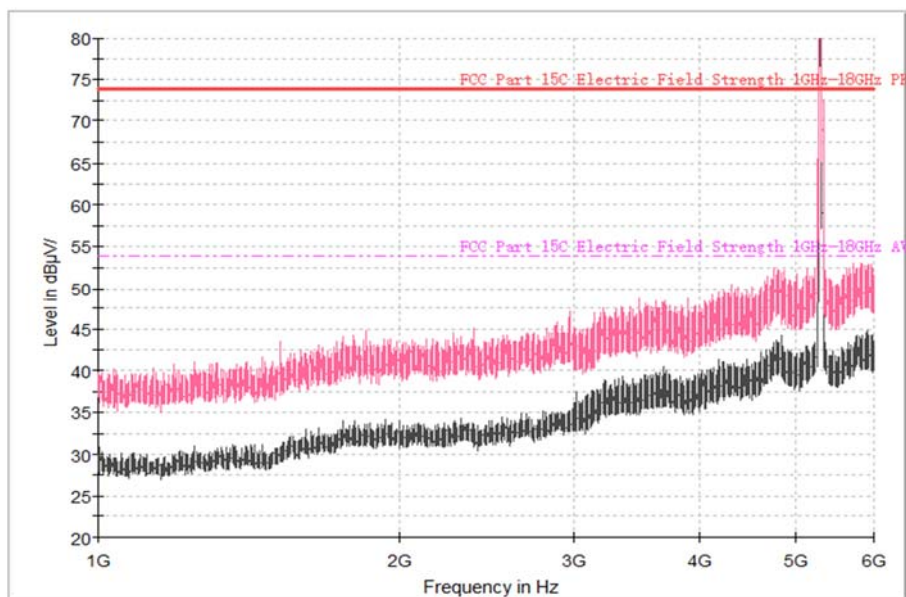


Full Spectrum

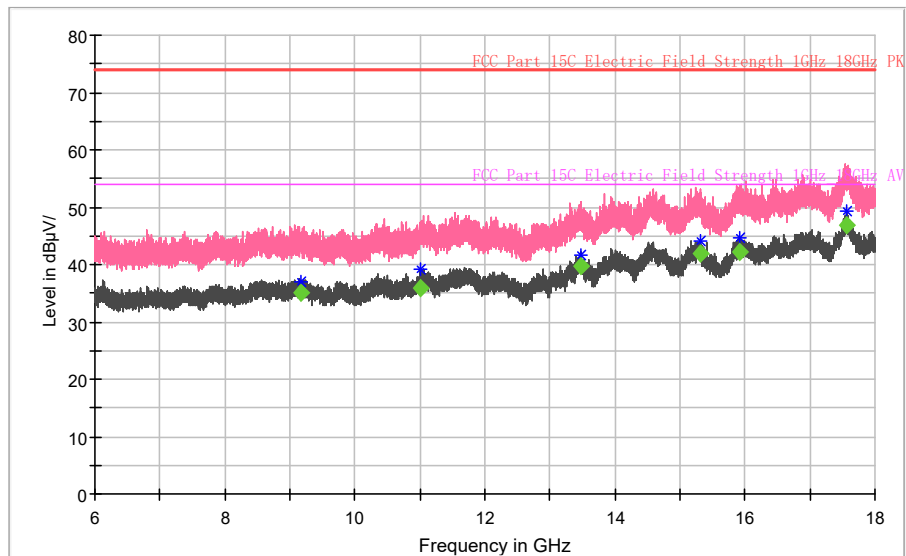


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
9157.600	---	55.19	---	35.19	54.00	18.81	-20.00	Vertical
11017.200	---	53.84	---	35.84	54.00	18.16	-18.00	Vertical
13468.800	---	54.30	---	39.80	54.00	14.20	-14.50	Vertical
15311.200	---	55.18	---	41.78	54.00	12.22	-13.40	Vertical
15922.800	---	56.14	---	42.24	54.00	11.76	-13.90	Vertical
17568.000	---	58.05	---	46.85	54.00	7.15	-11.20	Vertical

- 802.11n (HT20)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.60)

Full Spectrum

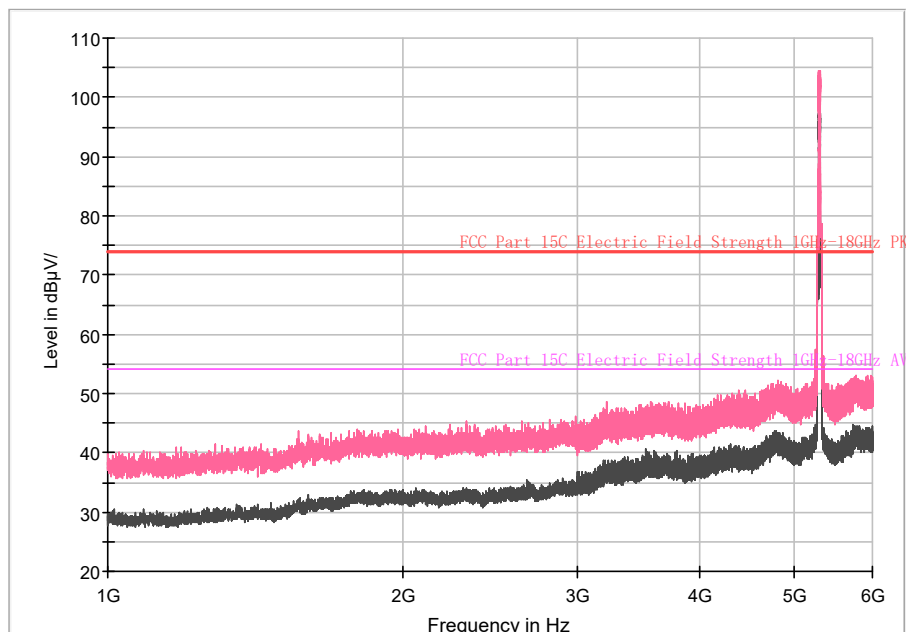


Full Spectrum

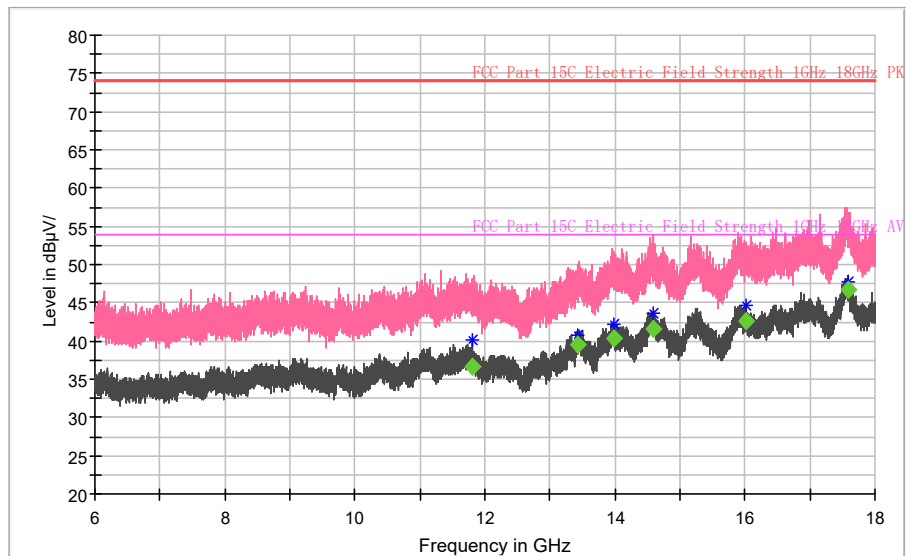


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11800.400	---	53.43	---	36.73	54.00	17.27	-16.70	Vertical
13428.400	---	54.05	---	39.55	54.00	14.45	-14.50	Vertical
13980.000	---	53.99	---	40.29	54.00	13.72	-13.70	Vertical
14580.000	---	55.17	---	41.67	54.00	12.33	-13.50	Vertical
16026.800	---	56.59	---	42.59	54.00	11.41	-14.00	Vertical
17579.600	---	57.88	---	46.68	54.00	7.32	-11.20	Vertical

- 802.11n (HT40)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.54)


Full Spectrum

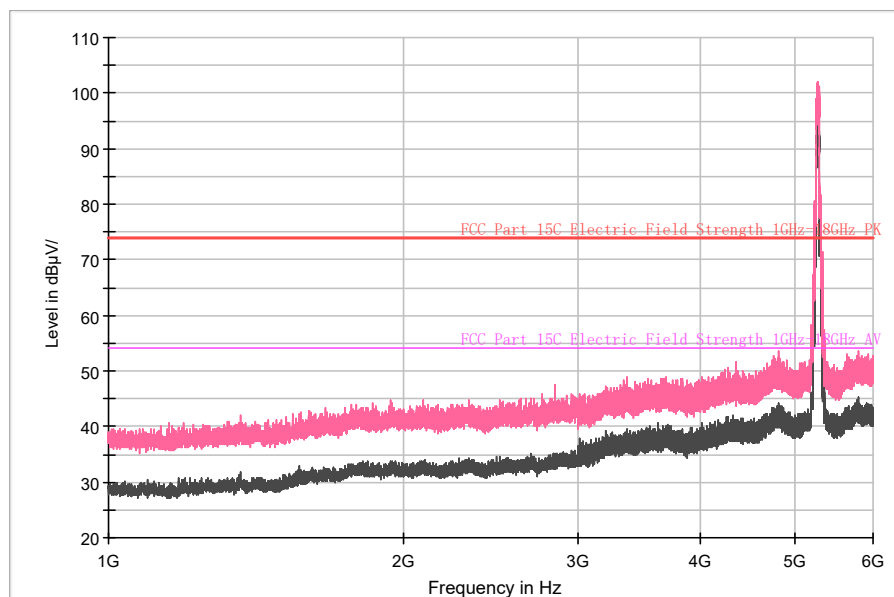

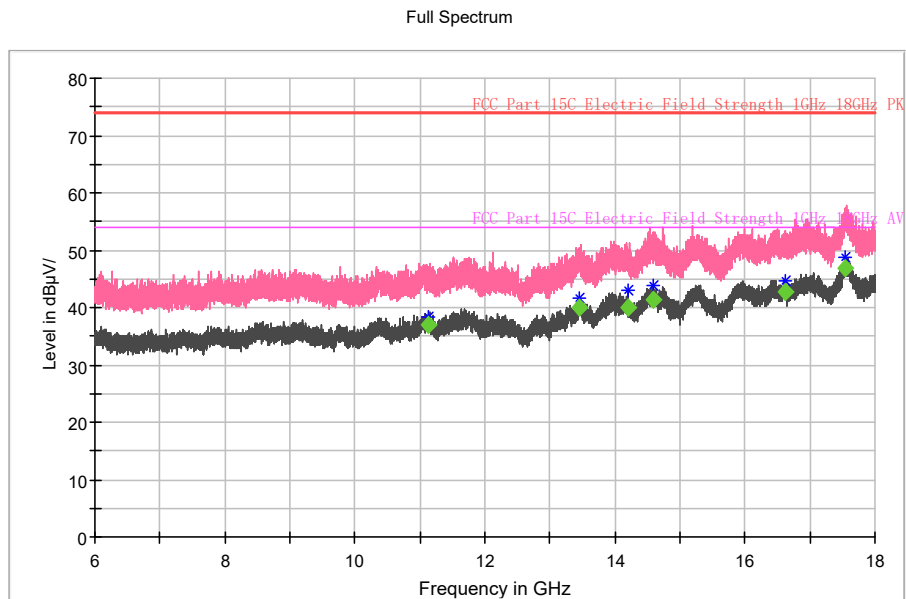


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11136.000	---	54.49	---	36.89	54.00	17.11	-17.60	Vertical
13447.600	---	54.46	---	39.96	54.00	14.04	-14.50	Vertical
14192.000	---	53.53	---	39.93	54.00	14.07	-13.60	Vertical
14588.400	---	54.75	---	41.25	54.00	12.75	-13.50	Vertical
16623.200	---	55.91	---	42.71	54.00	11.29	-13.20	Vertical
17549.600	---	58.12	---	46.82	54.00	7.18	-11.30	Vertical

- 802.11n (HT40)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.62)

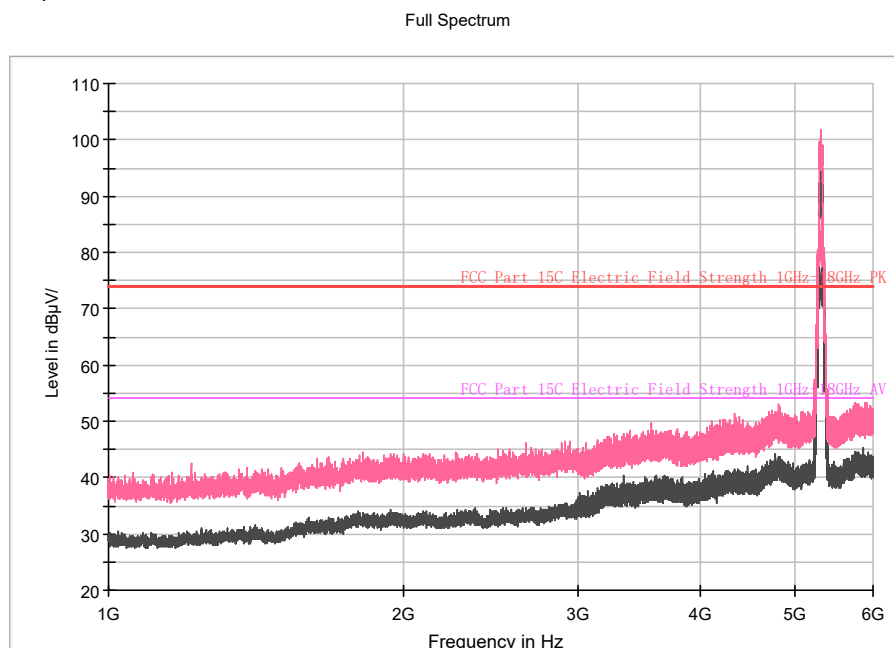

Full Spectrum

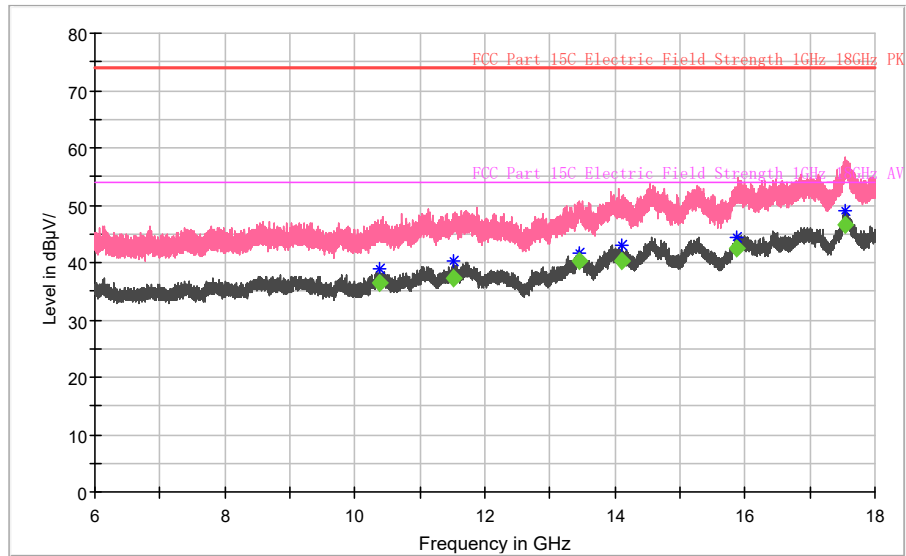


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
10378.400	---	55.33	---	36.43	54.00	17.57	-18.90	Vertical
11507.200	---	53.68	---	37.18	54.00	16.82	-16.50	Vertical
13456.400	---	54.67	---	40.17	54.00	13.83	-14.50	Vertical
14102.800	---	53.95	---	40.25	54.00	13.75	-13.70	Vertical
15875.600	---	56.25	---	42.35	54.00	11.65	-13.90	Vertical
17543.200	---	57.98	---	46.68	54.00	7.32	-11.30	Vertical


● 802.11ac (VHT80)

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.58)

Full Spectrum

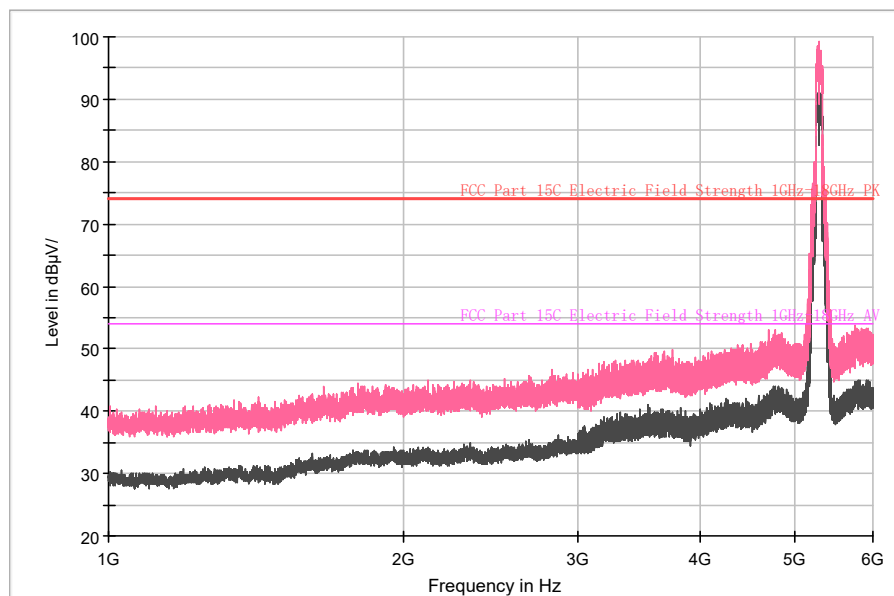

Full Spectrum

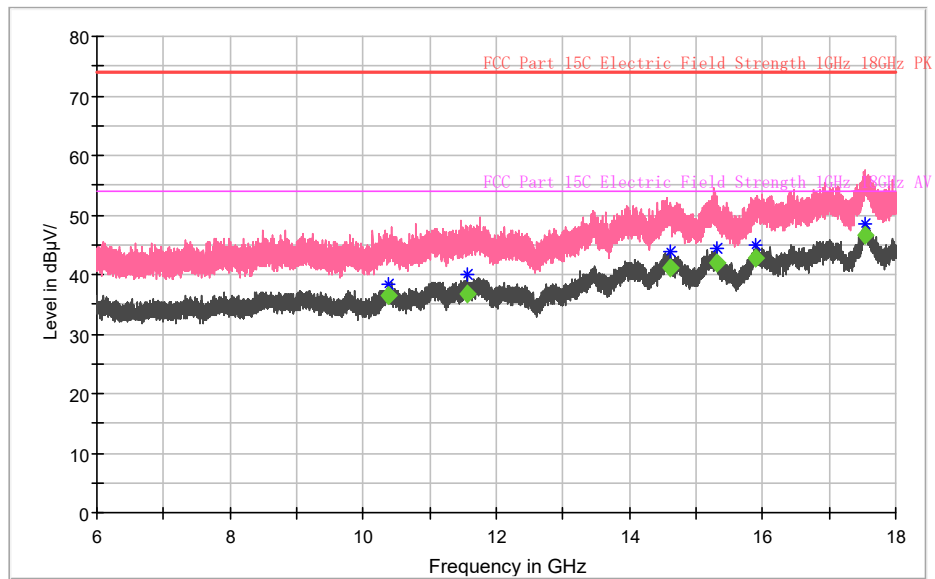


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
10373.600	---	55.21	---	36.31	54.00	17.69	-18.90	Vertical
11562.400	---	53.30	---	36.80	54.00	17.20	-16.50	Vertical
14616.000	---	54.70	---	41.10	54.00	12.90	-13.60	Vertical
15308.400	---	55.31	---	41.91	54.00	12.09	-13.40	Vertical
15903.600	---	56.52	---	42.62	54.00	11.38	-13.90	Vertical
17541.600	---	57.93	---	46.63	54.00	7.37	-11.30	Vertical

【5470~5725】


- 802.11a

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.120)

Full Spectrum

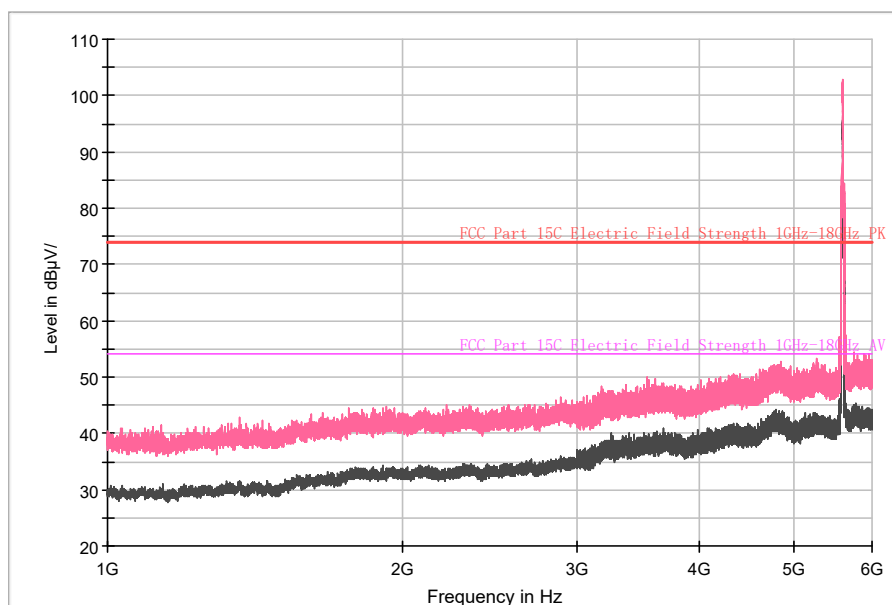

Full Spectrum

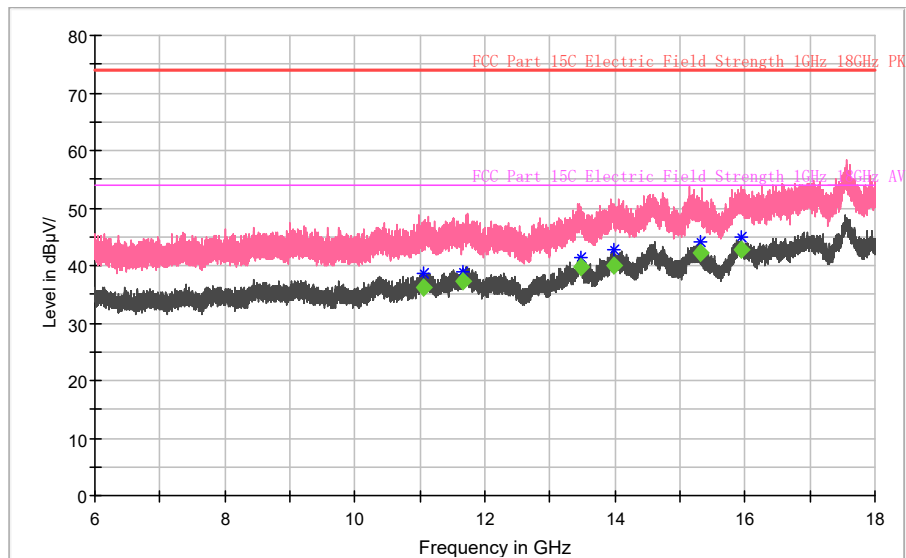


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11051.600	---	54.02	---	36.12	54.00	17.88	-17.90	Vertical
11658.800	---	53.71	---	37.21	54.00	16.79	-16.50	Vertical
13479.200	---	54.22	---	39.72	54.00	14.28	-14.50	Vertical
13975.600	---	53.68	---	39.98	54.00	14.02	-13.70	Vertical
15312.800	---	55.63	---	42.23	54.00	11.77	-13.40	Vertical
15946.000	---	56.60	---	42.70	54.00	11.30	-13.90	Vertical

● 802.11n (HT20)


Spurious Radiated Emissions from 1GHz to 18GHz:

CH Middle (No.120)

Full Spectrum

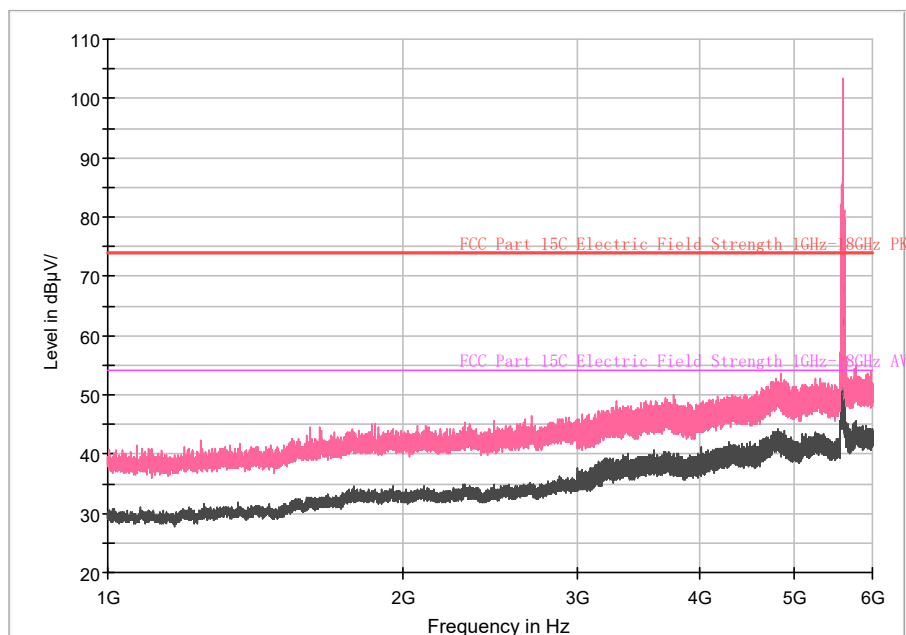

Full Spectrum

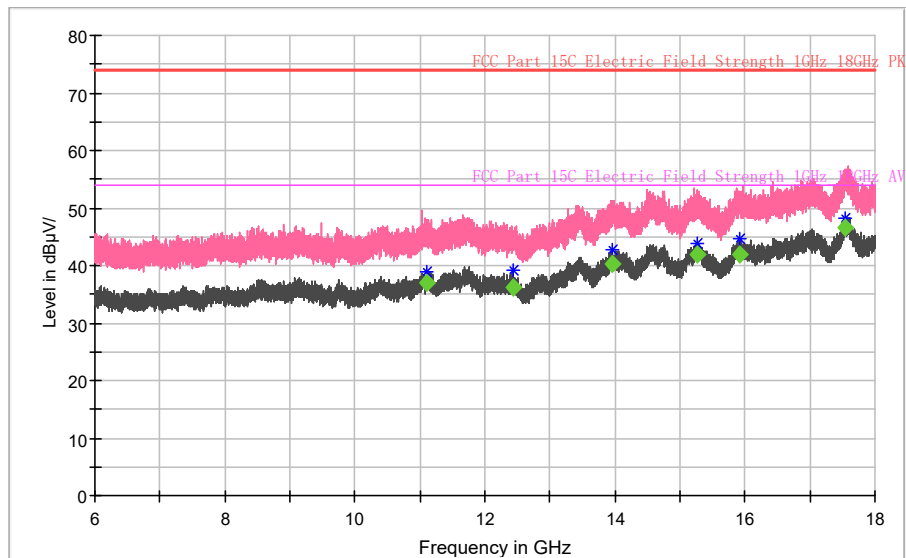


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11108.800	---	54.71	---	37.01	54.00	16.99	-17.70	Vertical
12438.000	---	53.62	---	36.12	54.00	17.88	-17.50	Vertical
13962.400	---	53.88	---	40.18	54.00	13.82	-13.70	Vertical
15270.000	---	55.32	---	41.82	54.00	12.18	-13.50	Vertical
15925.200	---	55.84	---	41.94	54.00	12.06	-13.90	Vertical
17533.200	---	57.80	---	46.50	54.00	7.50	-11.30	Vertical


● 802.11n (HT40)

Spurious Radiated Emissions from 1GHz to 18GHz:

CH Middle (No.118)

Full Spectrum

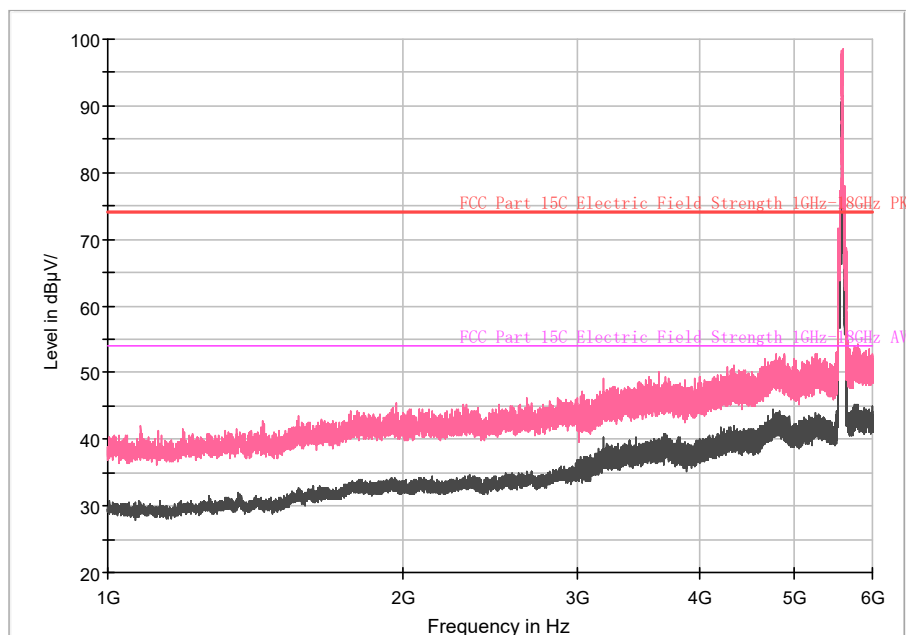


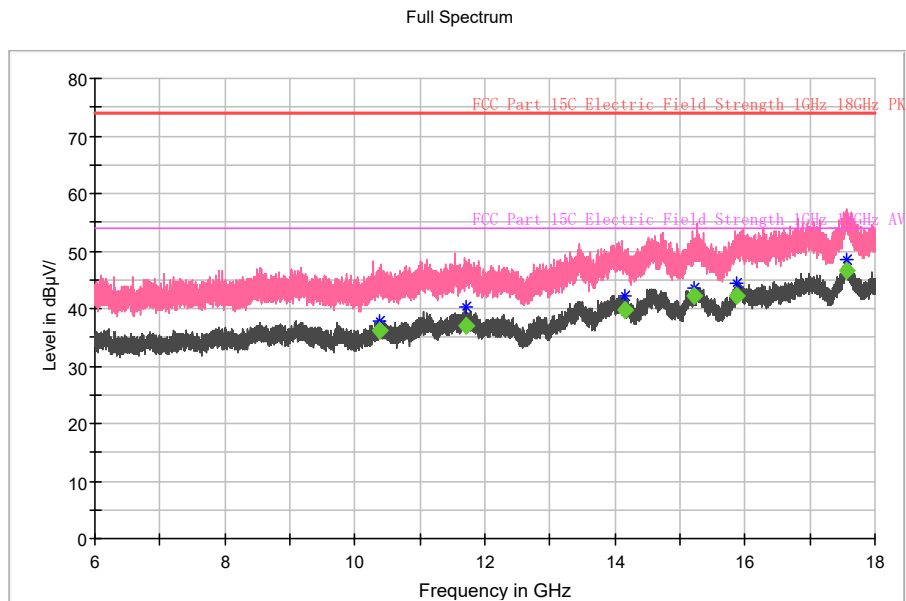


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
10374.800	---	55.13	---	36.23	54.00	17.77	-18.90	Vertical
11703.200	---	53.55	---	36.95	54.00	17.05	-16.60	Vertical
14164.000	---	53.33	---	39.73	54.00	14.27	-13.60	Vertical
15220.400	---	55.70	---	42.10	54.00	11.90	-13.60	Vertical
15869.600	---	56.16	---	42.26	54.00	11.74	-13.90	Vertical
17573.600	---	57.84	---	46.64	54.00	7.36	-11.20	Vertical

● 802.11ac (VHT80)

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.122)

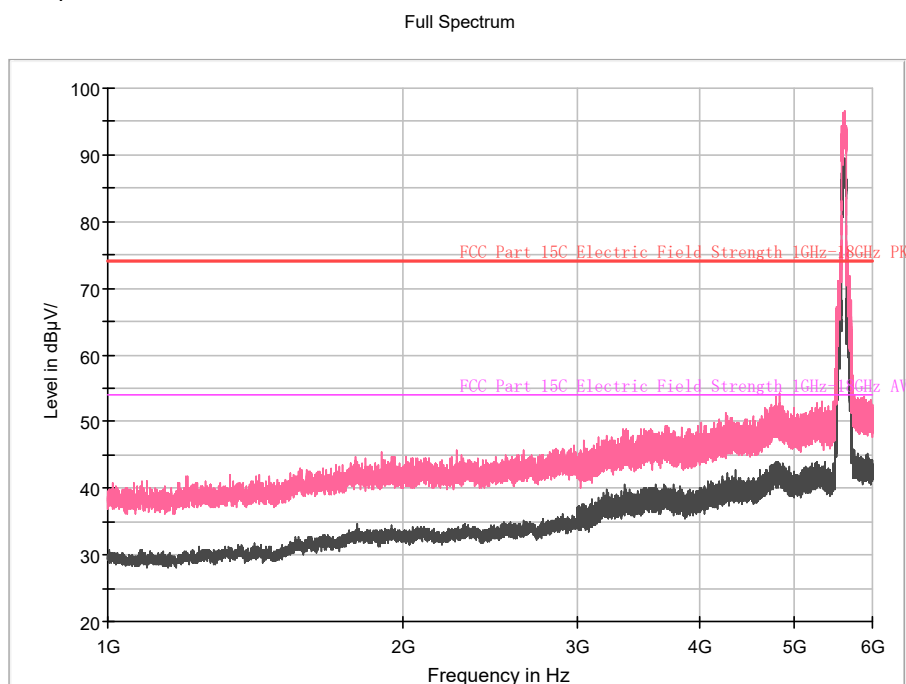


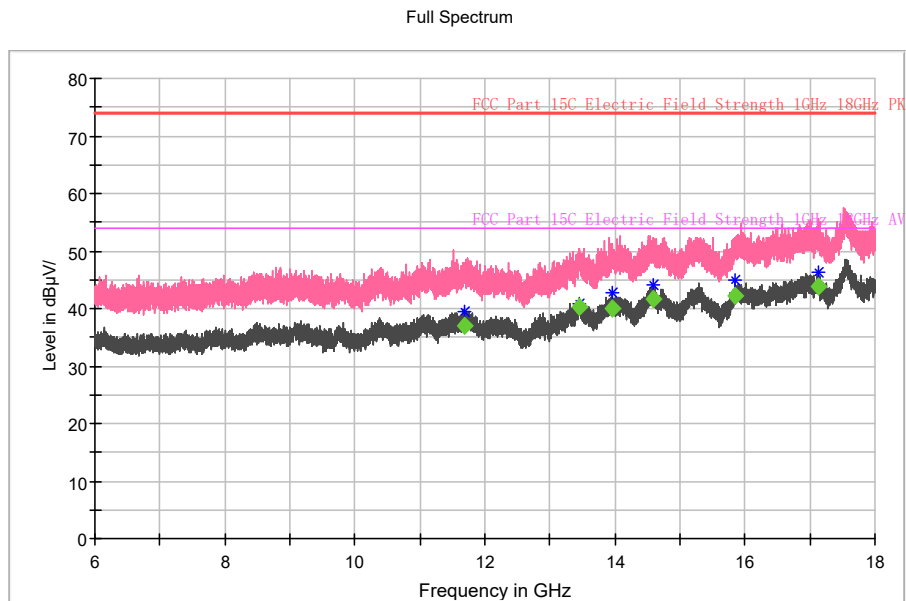


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11694.800	---	53.68	---	37.08	54.00	16.92	-16.60	Vertical
13459.600	---	54.84	---	40.34	54.00	13.66	-14.50	Vertical
13968.000	---	53.58	---	39.88	54.00	14.12	-13.70	Vertical
14581.200	---	55.14	---	41.64	54.00	12.36	-13.50	Vertical
15857.200	---	56.03	---	42.13	54.00	11.87	-13.90	Vertical
17138.800	---	55.42	---	43.82	54.00	10.18	-11.60	Vertical

● 802.11ac (VHT80)

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.138)

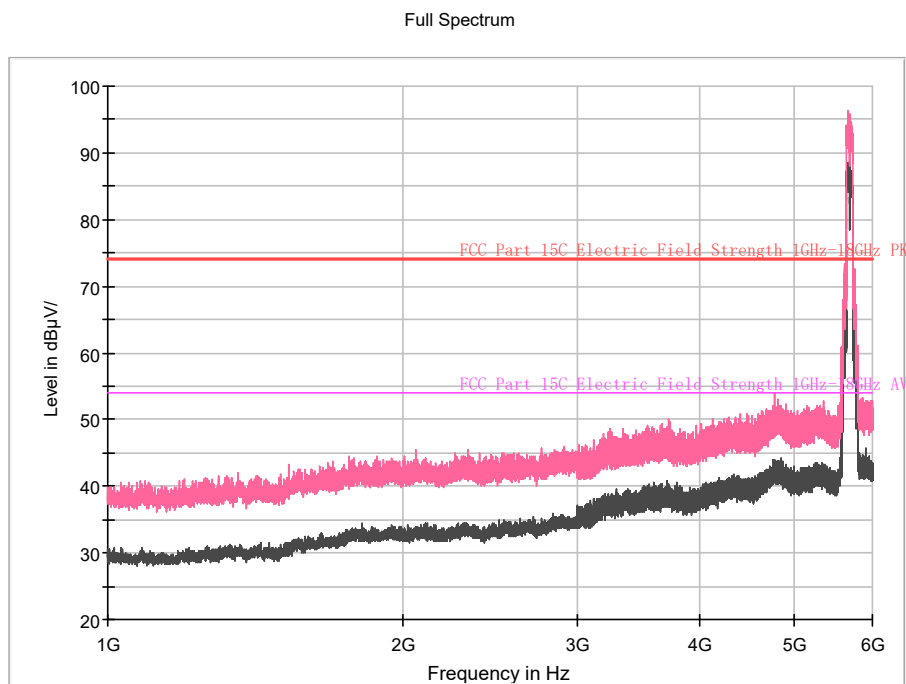

Full Spectrum

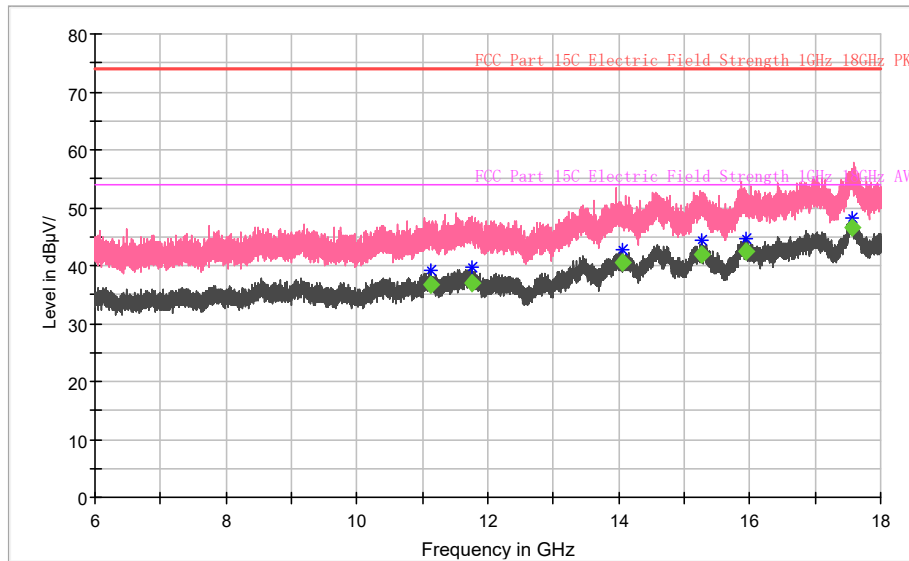


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11121.200	---	54.27	---	36.67	54.00	17.33	-17.60	Vertical
11760.000	---	53.68	---	36.98	54.00	17.02	-16.70	Vertical
14047.200	---	54.26	---	40.56	54.00	13.44	-13.70	Vertical
15266.400	---	55.29	---	41.79	54.00	12.21	-13.50	Vertical
15939.200	---	56.30	---	42.40	54.00	11.60	-13.90	Vertical
17571.600	---	57.89	---	46.69	54.00	7.31	-11.20	Vertical


【5725~5850】

● 802.11a

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.157)


Full Spectrum

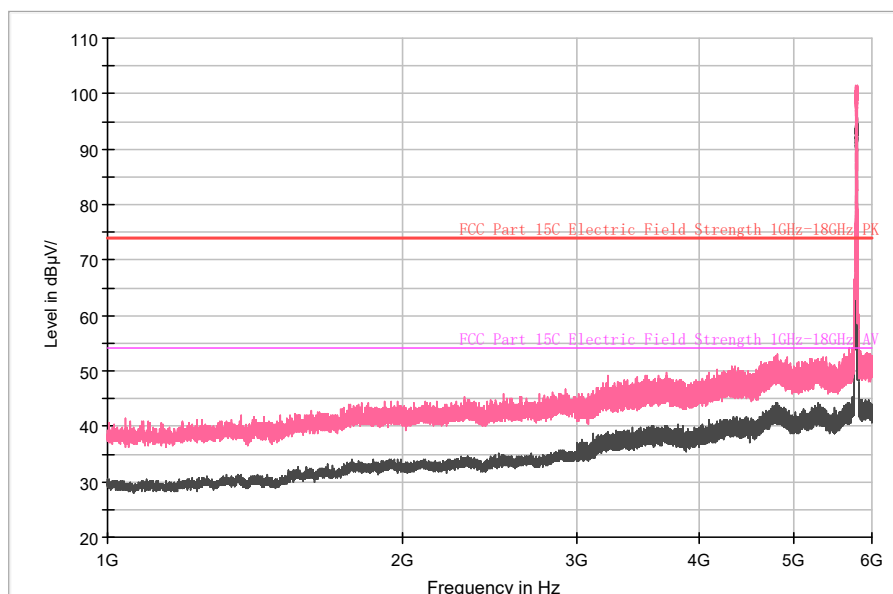

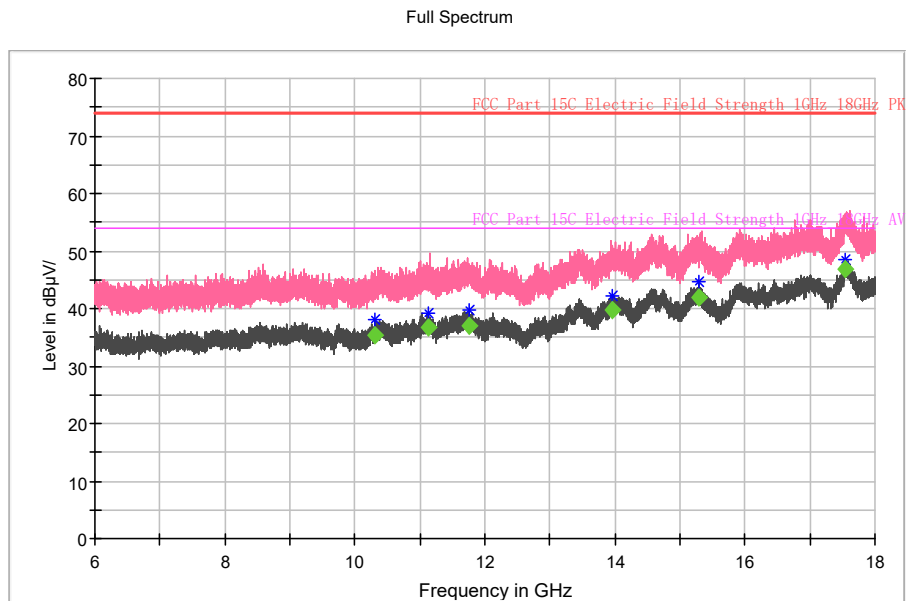


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
10299.200	---	54.56	---	35.36	54.00	18.64	-19.20	Vertical
11137.600	---	54.44	---	36.84	54.00	17.16	-17.60	Vertical
11752.800	---	53.74	---	37.04	54.00	16.96	-16.70	Vertical
13971.600	---	53.55	---	39.85	54.00	14.15	-13.70	Vertical
15288.800	---	55.32	---	41.82	54.00	12.18	-13.50	Vertical
17545.600	---	58.05	---	46.75	54.00	7.25	-11.30	Vertical

- 802.11n (HT20)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.157)

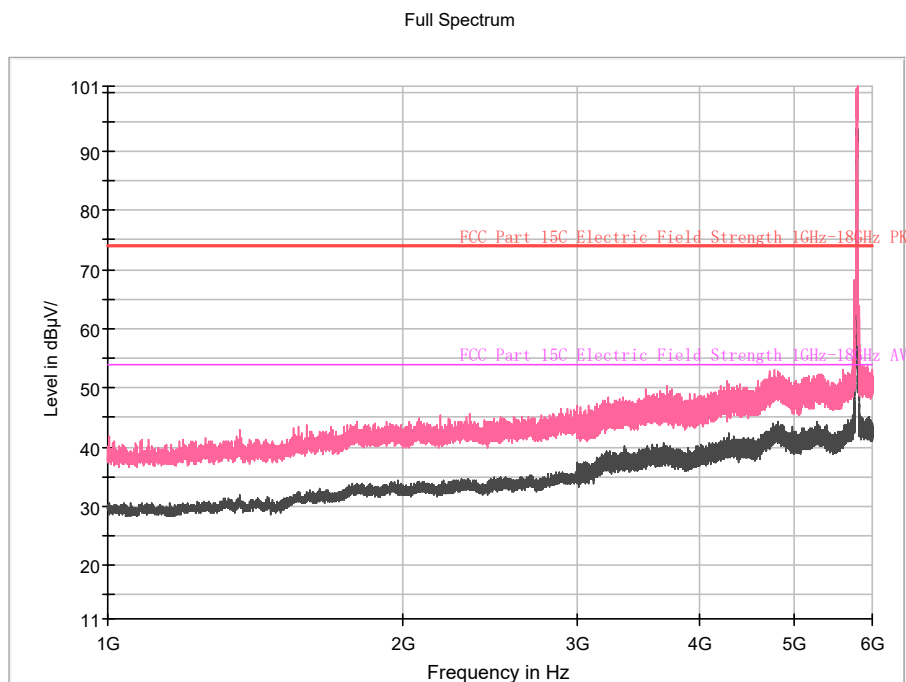

Full Spectrum

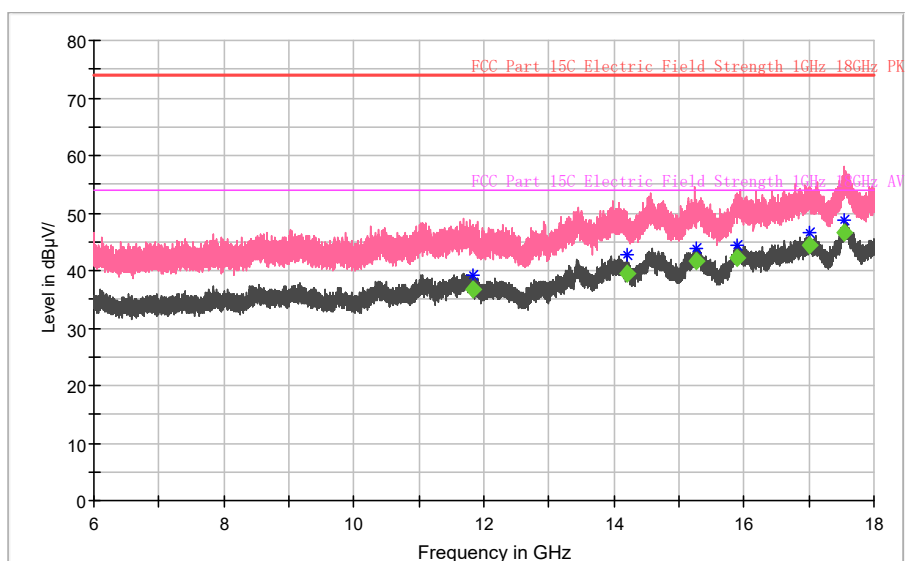


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11818.800	---	53.33	---	36.63	54.00	17.37	-16.70	Vertical
14197.200	---	52.97	---	39.37	54.00	14.63	-13.60	Vertical
15277.200	---	55.27	---	41.77	54.00	12.23	-13.50	Vertical
15887.200	---	56.15	---	42.25	54.00	11.75	-13.90	Vertical
16997.200	---	56.62	---	44.42	54.00	9.58	-12.20	Vertical
17549.200	---	57.99	---	46.69	54.00	7.31	-11.30	Vertical

● 802.11n (HT40)


Spurious Radiated Emissions from 1GHz to 18GHz:

CH Middle (No.151)

Full Spectrum

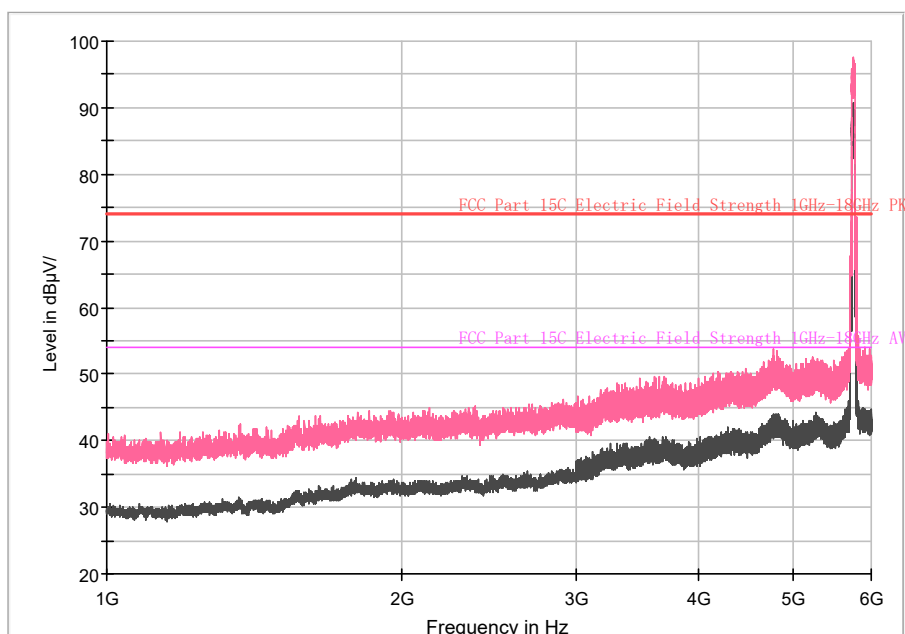

Full Spectrum

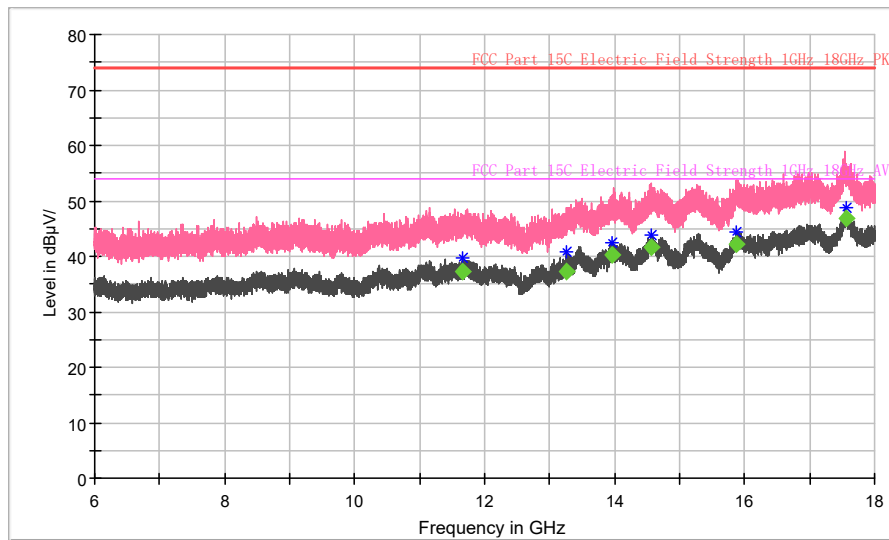



Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11660.000	---	53.70	---	37.20	54.00	16.80	-16.50	Vertical
13259.200	---	52.44	---	37.24	54.00	16.76	-15.20	Vertical
13960.800	---	53.92	---	40.22	54.00	13.78	-13.70	Vertical
14559.600	---	54.92	---	41.52	54.00	12.48	-13.40	Vertical
15862.400	---	56.22	---	42.32	54.00	11.68	-13.90	Vertical
17563.600	---	57.93	---	46.73	54.00	7.27	-11.20	Vertical

● 802.11n (HT40)

Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.159)


Full Spectrum

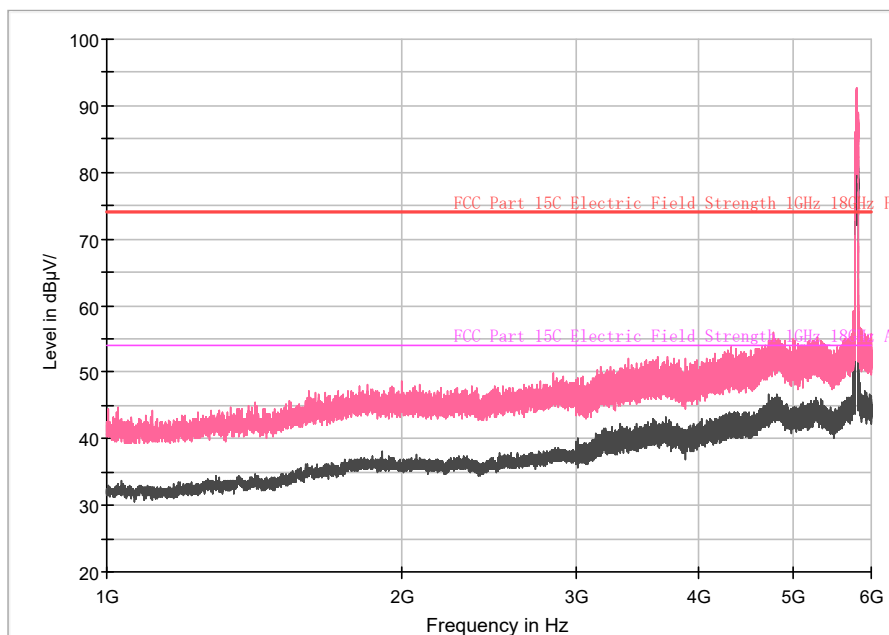

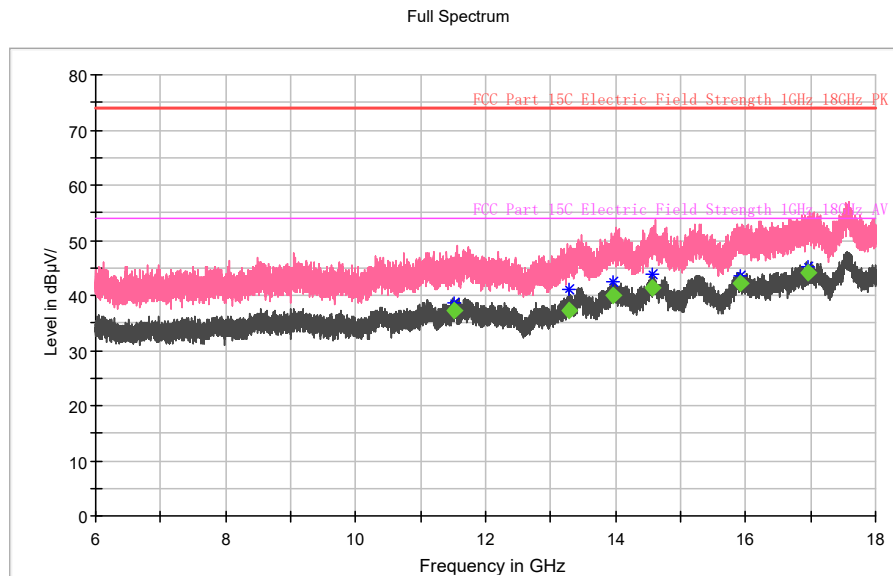


Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
11504.800	---	53.77	---	37.27	54.00	16.73	-16.50	Vertical
13277.200	---	52.35	---	37.25	54.00	16.75	-15.10	Vertical
13966.800	---	53.64	---	39.94	54.00	14.06	-13.70	Vertical
14566.000	---	54.89	---	41.49	54.00	12.51	-13.40	Vertical
15921.200	---	56.00	---	42.10	54.00	11.90	-13.90	Vertical
16962.800	---	56.32	---	44.02	54.00	9.98	-12.30	Vertical

- 802.11ac (VHT80)
Spurious Radiated Emissions from 1GHz to 18GHz:
CH Middle (No.155)

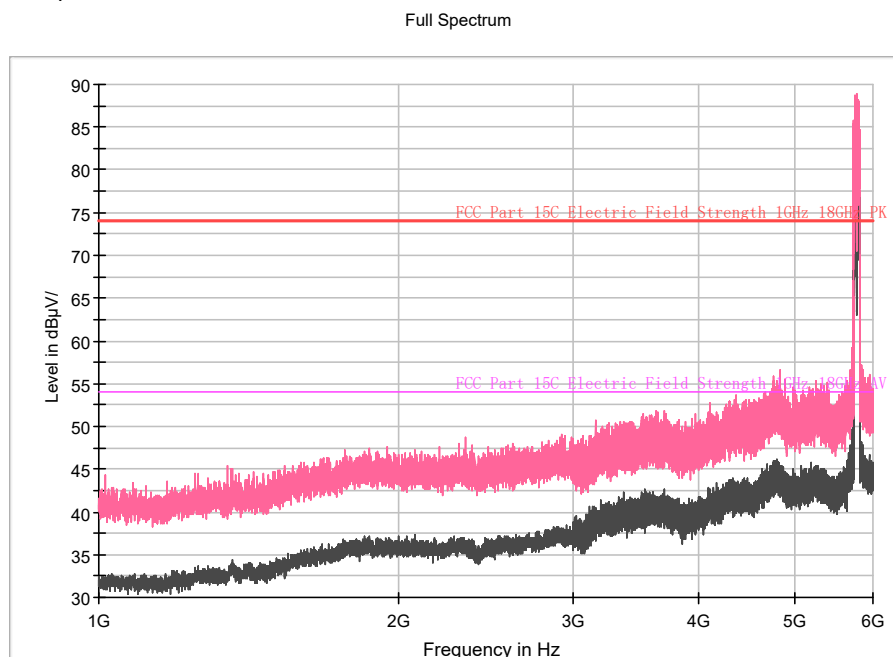


Full Spectrum

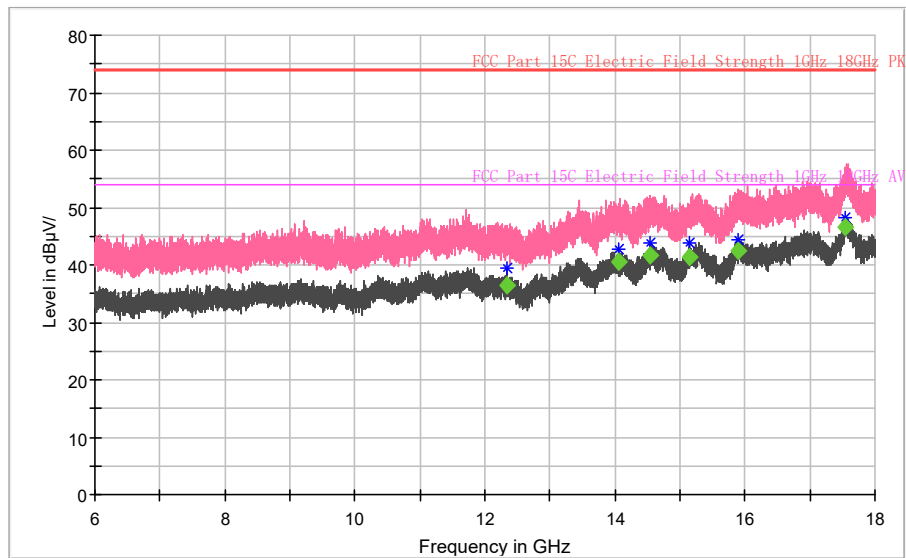

Frequency (MHz)	Reading MaxPeak (dBuV)	Reading Average (dBuV)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	A _{Rpl} (dB)	Polarity
12346.800	---	53.41	---	36.31	54.00	17.69	-17.10	Vertical
14047.600	---	54.25	---	40.55	54.00	13.45	-13.70	Vertical
14543.600	---	54.97	---	41.57	54.00	12.43	-13.40	Vertical
15139.600	---	54.83	---	41.33	54.00	12.67	-13.50	Vertical
15902.400	---	56.29	---	42.39	54.00	11.61	-13.90	Vertical
17545.200	---	57.95	---	46.65	54.00	7.35	-11.30	Vertical

AC Power line Conducted Emission 100V

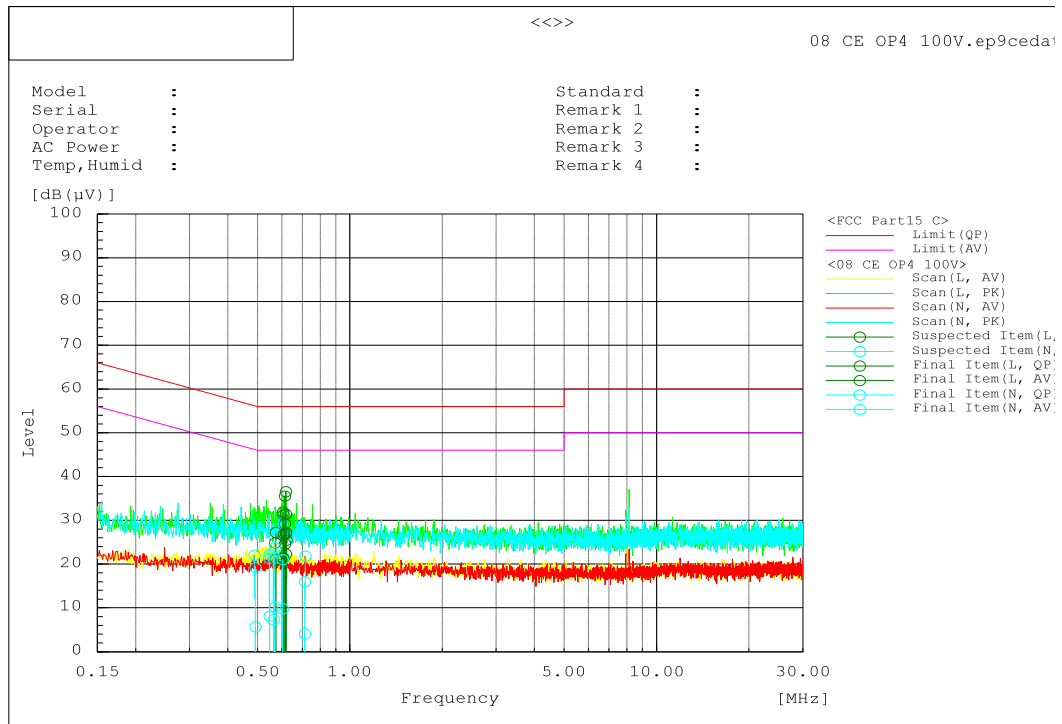


L+N Line

MEASUREMENT RESULT:

Range	Frequency MHz	Line	Reading			Factor dB	Level			Limit dB(μV)	Limit			Margin			Pass/Fail
			dB(μV)				dB(μV)				dB(μV)			dB			
			QP	AV	PK		QP	AV	PK		QP	AV	PK	QP	AV	PK	
Band1	0.574	L	7.3	1.2		19.9	27.2	21.1			56	46		28.8	24.9		Pass
Band1	0.605	L	12	1.6		19.9	31.9	21.5			56	46		24.1	24.5		Pass
Band1	0.607	L	11.4	1.4		19.9	31.3	21.3			56	46		24.7	24.7		Pass
Band1	0.614	L	15.7	4.7		19.9	35.6	24.6			56	46		20.4	21.4		Pass
Band1	0.618	L	16.7	7		19.9	36.6	26.9			56	46		19.4	19.1		Pass
Band1	0.619	L	11.5	2.4		19.9	31.4	22.3			56	46		24.6	23.7		Pass
Band1	0.492	N	-0.7	-14		19.9	19.2	5.7			56.1	46.1		36.9	40.4		Pass
Band1	0.547	N	2.3	-12		19.9	22.2	8.1			56	46		33.8	37.9		Pass
Band1	0.563	N	2.8	-13		19.9	22.7	7.3			56	46		33.3	38.7		Pass
Band1	0.569	N	3.9	-9.7		19.9	23.8	10.2			56	46		32.2	35.8		Pass
Band1	0.604	N	1.1	-10		19.9	21	9.8			56	46		35	36.2		Pass
Band1	0.712	N	-3.8	-16		19.8	16	4.1			56	46		40	41.9		Pass

240V

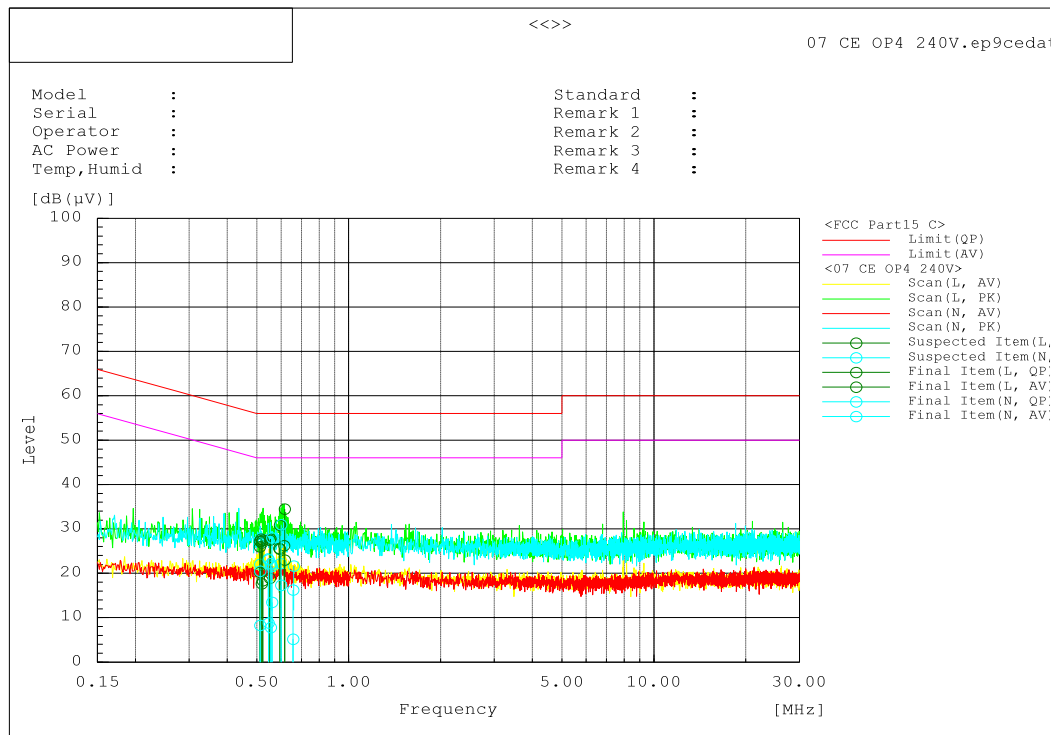

L+N Line

MEASUREMENT RESULT:

Range	Frequency MHz	Line	Reading			Factor dB	Level			Limit dB(μV)	Limit			Margin			Pass/Fail
			dB(μV)				dB(μV)				dB(μV)			dB			
			QP	AV	PK		QP	AV	PK		QP	AV	PK	QP	AV	PK	
Band1	0.513	N	0.6	-12		19.9	20.5	8.3			56	46		35.5	37.7		Pass
Band1	0.547	N	3.2	-11		19.9	23.1	8.8			56	46		32.9	37.2		Pass
Band1	0.556	N	2.3	-12		19.9	22.2	7.8			56	46		33.8	38.2		Pass
Band1	0.561	N	8.1	-6.4		19.9	28	13.5			56	46		28	32.5		Pass
Band1	0.601	N	11.1	-2.6		19.9	31	17.3			56	46		25	28.7		Pass
Band1	0.657	N	-3.6	-15		19.9	16.3	5.1			56	46		39.7	40.9		Pass
Band1	0.512	L	7.3	0.3		19.9	27.2	20.2			56	46		28.8	25.8		Pass
Band1	0.518	L	7.3	-2.2		19.9	27.2	17.7			56	46		28.8	28.3		Pass
Band1	0.523	L	7.6	-1.6		19.9	27.5	18.3			56	46		28.5	27.7		Pass
Band1	0.552	L	7.6	-1		19.9	27.5	18.9			56	46		28.5	27.1		Pass
Band1	0.595	L	11	5.5		19.9	30.9	25.4			56	46		25.1	20.6		Pass
Band1	0.616	L	14.6	3.1		19.9	34.5	23			56	46		21.5	23		Pass

---The end of the test report---